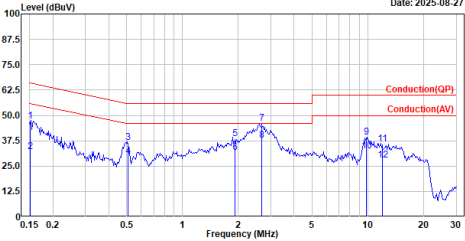
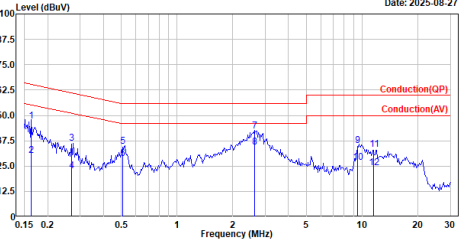


## Appendix A. Test Result of AC Power Line Conducted Emission


| TX_BLE2M_2440MHz_Line                                                             |           |       |       |        |       |        |         | TX_BLE2M_2440MHz_Neutral                                                           |           |       |       |        |       |        |         |
|-----------------------------------------------------------------------------------|-----------|-------|-------|--------|-------|--------|---------|------------------------------------------------------------------------------------|-----------|-------|-------|--------|-------|--------|---------|
| Site :HY-SR01<br>Condition :Line<br>Mode :TX_BLE2M_2440MHz<br>test by :Neko       |           |       |       |        |       |        |         | Site :HY-SR01<br>Condition :Neutral<br>Mode :TX_BLE2M_2440MHz<br>test by :Neko     |           |       |       |        |       |        |         |
|  |           |       |       |        |       |        |         |  |           |       |       |        |       |        |         |
| No.                                                                               | Frequency | Level | Limit | Over   | Read  | Factor | Remark  | No.                                                                                | Frequency | Level | Limit | Over   | Read  | Factor | Remark  |
|                                                                                   | MHz       | dBuV  | dBuV  | dB     | dBuV  | dB     |         |                                                                                    | MHz       | dBuV  | dBuV  | dB     | dBuV  | dB     |         |
| 1                                                                                 | 0.151     | 47.34 | 65.94 | -18.60 | 37.77 | 9.57   | QP      | 1                                                                                  | 0.163     | 47.22 | 65.31 | -18.09 | 37.65 | 9.57   | QP      |
| 2                                                                                 | 0.151     | 31.98 | 55.94 | -23.96 | 22.41 | 9.57   | Average | 2                                                                                  | 0.163     | 30.17 | 55.31 | -25.14 | 20.60 | 9.57   | Average |
| 3                                                                                 | 0.507     | 36.58 | 56.00 | -19.42 | 26.99 | 9.59   | QP      | 3                                                                                  | 0.270     | 36.35 | 61.12 | -24.77 | 26.76 | 9.59   | QP      |
| 4                                                                                 | 0.507     | 29.73 | 46.00 | -16.27 | 20.14 | 9.59   | Average | 4                                                                                  | 0.270     | 22.46 | 51.12 | -28.66 | 12.87 | 9.59   | Average |
| 5                                                                                 | 1.915     | 38.61 | 56.00 | -17.39 | 28.91 | 9.70   | QP      | 5                                                                                  | 0.510     | 34.83 | 56.00 | -21.17 | 25.24 | 9.59   | QP      |
| 6                                                                                 | 1.915     | 31.82 | 46.00 | -14.18 | 22.12 | 9.70   | Average | 6                                                                                  | 0.510     | 28.63 | 46.00 | -17.37 | 19.04 | 9.59   | Average |
| 7                                                                                 | 2.675     | 46.20 | 56.00 | -9.80  | 36.40 | 9.60   | QP      | 7                                                                                  | 2.615     | 42.15 | 56.00 | -13.85 | 32.34 | 9.81   | QP      |
| 8                                                                                 | 2.675     | 37.71 | 46.00 | -8.29  | 27.91 | 9.80   | Average | 8                                                                                  | 2.615     | 34.50 | 46.00 | -11.50 | 24.69 | 9.81   | Average |
| 9                                                                                 | 9.776     | 39.30 | 60.00 | -20.70 | 29.11 | 10.19  | QP      | 9                                                                                  | 9.452     | 34.93 | 60.00 | -25.07 | 24.71 | 10.22  | QP      |
| 10                                                                                | 9.776     | 32.54 | 50.00 | -17.46 | 22.35 | 10.19  | Average | 10                                                                                 | 9.452     | 26.79 | 50.00 | -23.21 | 16.57 | 10.22  | Average |
| 11                                                                                | 11.975    | 35.82 | 60.00 | -24.18 | 25.82 | 10.00  | QP      | 11                                                                                 | 11.560    | 33.17 | 60.00 | -26.83 | 23.05 | 10.12  | QP      |
| 12                                                                                | 11.975    | 27.78 | 50.00 | -22.22 | 17.78 | 10.00  | Average | 12                                                                                 | 11.560    | 24.33 | 50.00 | -25.67 | 14.21 | 10.12  | Average |

Note:  
1. Level = Read Level + Factor  
2. Factor = LISN insertion loss + Cable loss  
3. Over Limit = Level - Limit Line

Note:  
1. Level = Read Level + Factor  
2. Factor = LISN insertion loss + Cable loss  
3. Over Limit = Level - Limit Line

**Appendix B. Test Result of 6dB Bandwidth**

| Modulation   | Frequency<br>(MHz) | 6dB Bandwidth<br>(MHz) | Limit<br>(MHz) | Result |
|--------------|--------------------|------------------------|----------------|--------|
| GFSK (1Mbps) | 2402               | 0.67                   | $\geq 0.50$    | Pass   |
|              | 2440               | 0.67                   | $\geq 0.50$    | Pass   |
|              | 2480               | 0.66                   | $\geq 0.50$    | Pass   |
| GFSK (2Mbps) | 2404               | 1.24                   | $\geq 0.50$    | Pass   |
|              | 2440               | 1.24                   | $\geq 0.50$    | Pass   |
|              | 2478               | 1.24                   | $\geq 0.50$    | Pass   |

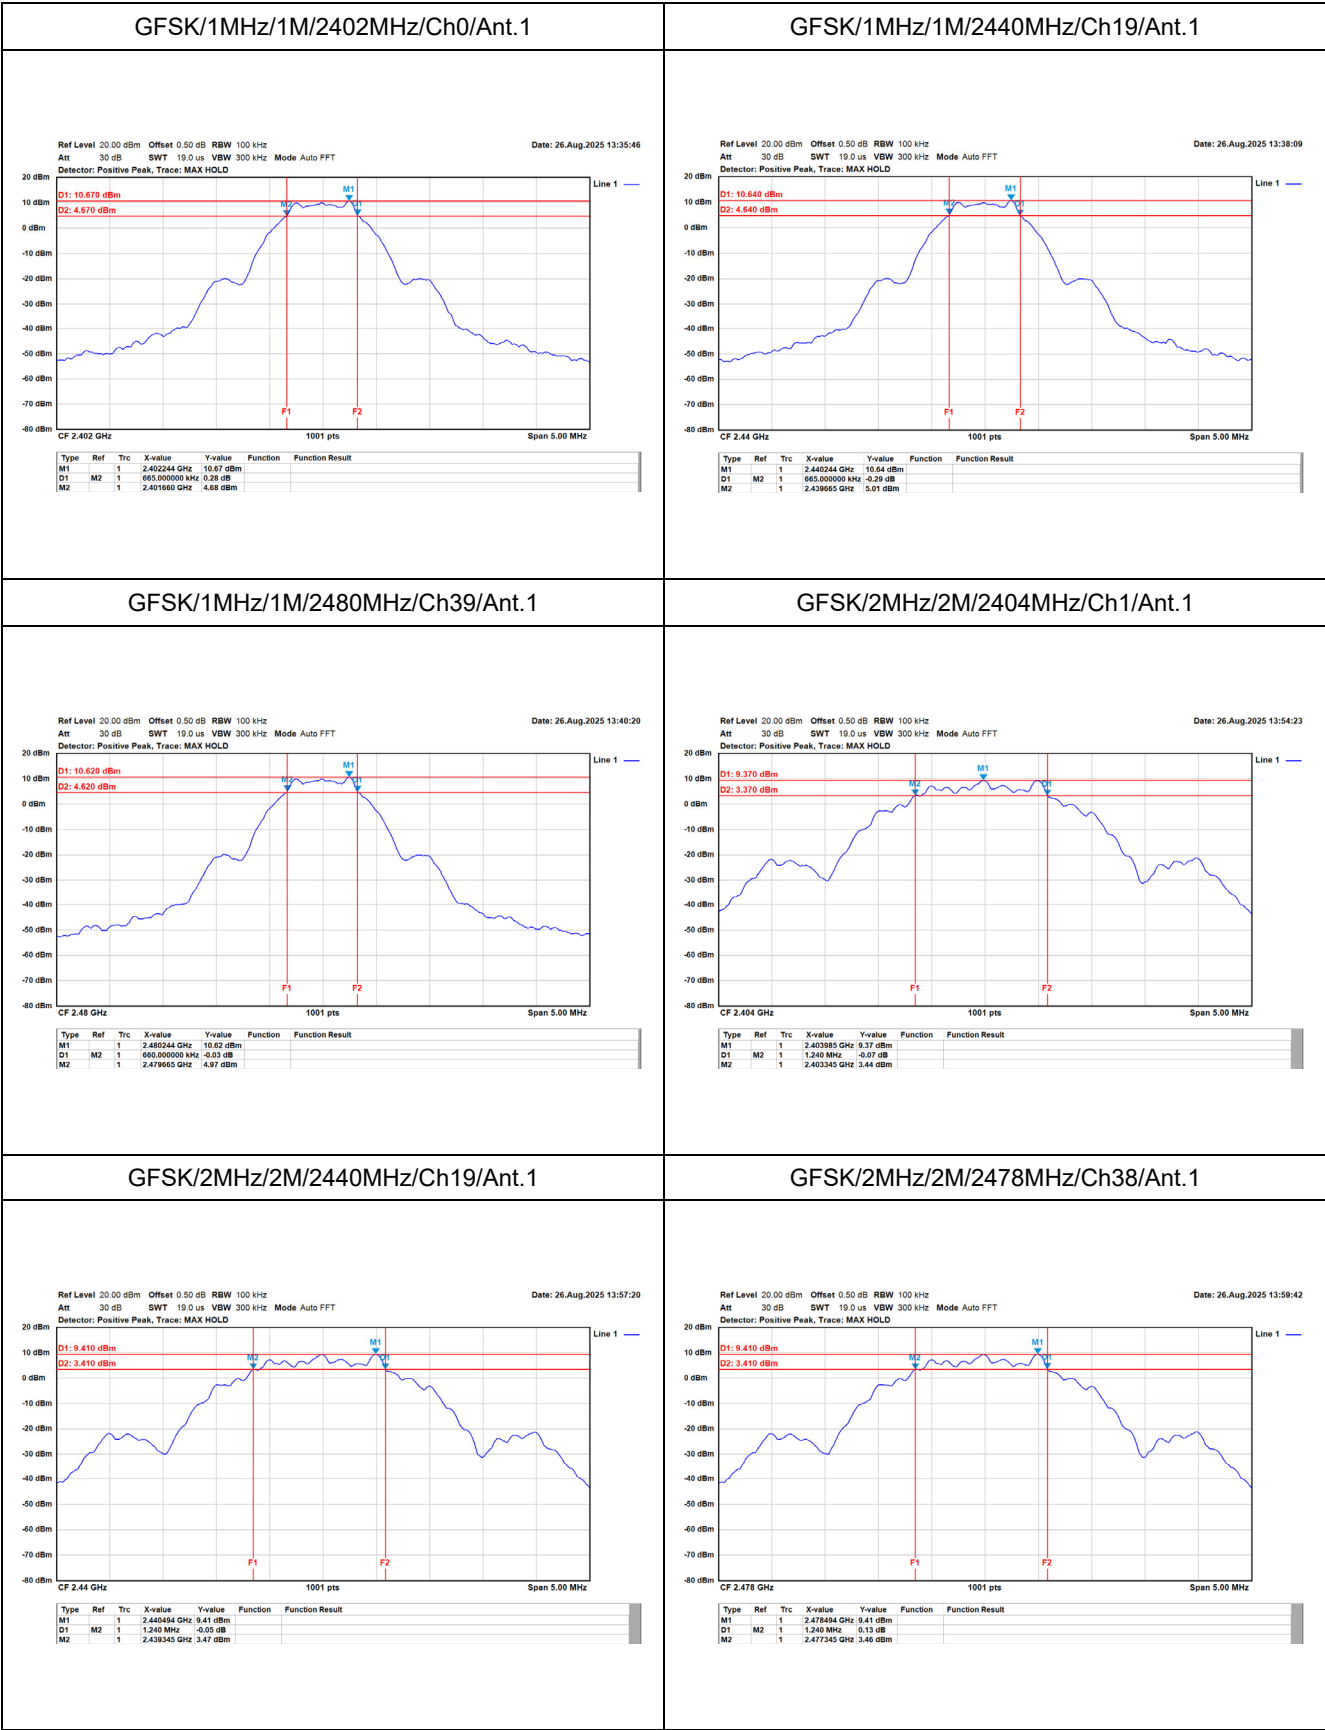

**Appendix C. Test Result of Maximum Peak Conducted Output Power**

## Low Power


| Modulation   | Frequency (MHz) | Maximum Peak Conducted Output Power (dBm) | Limit (dBm) | Result |
|--------------|-----------------|-------------------------------------------|-------------|--------|
| GFSK (1Mbps) | 2402            | 4.06                                      | 30.00       | Pass   |
|              | 2440            | 4.36                                      | 30.00       | Pass   |
|              | 2480            | 4.60                                      | 30.00       | Pass   |
| GFSK (2Mbps) | 2404            | 4.04                                      | 30.00       | Pass   |
|              | 2440            | 4.33                                      | 30.00       | Pass   |
|              | 2478            | 4.56                                      | 30.00       | Pass   |

## High Power

| Modulation   | Frequency (MHz) | Maximum Peak Conducted Output Power (dBm) | Limit (dBm) | Result |
|--------------|-----------------|-------------------------------------------|-------------|--------|
| GFSK (1Mbps) | 2402            | 10.99                                     | 30.00       | Pass   |
|              | 2440            | 11.06                                     | 30.00       | Pass   |
|              | 2480            | 11.08                                     | 30.00       | Pass   |
| GFSK (2Mbps) | 2404            | 10.96                                     | 30.00       | Pass   |
|              | 2440            | 11.04                                     | 30.00       | Pass   |
|              | 2478            | 11.06                                     | 30.00       | Pass   |


**Appendix D. Test Result of Power Spectral Density**


| Modulation   | Frequency<br>(MHz) | Maximum Power Spectral Density<br>(dBm/3kHz) | Limit<br>(dBm/3kHz) | Result |
|--------------|--------------------|----------------------------------------------|---------------------|--------|
| GFSK (1Mbps) | 2402               | -5.98                                        | 8.00                | Pass   |
|              | 2440               | -6.01                                        | 8.00                | Pass   |
|              | 2480               | -6.12                                        | 8.00                | Pass   |
| GFSK (2Mbps) | 2404               | -8.98                                        | 8.00                | Pass   |
|              | 2440               | -8.98                                        | 8.00                | Pass   |
|              | 2478               | -8.97                                        | 8.00                | Pass   |

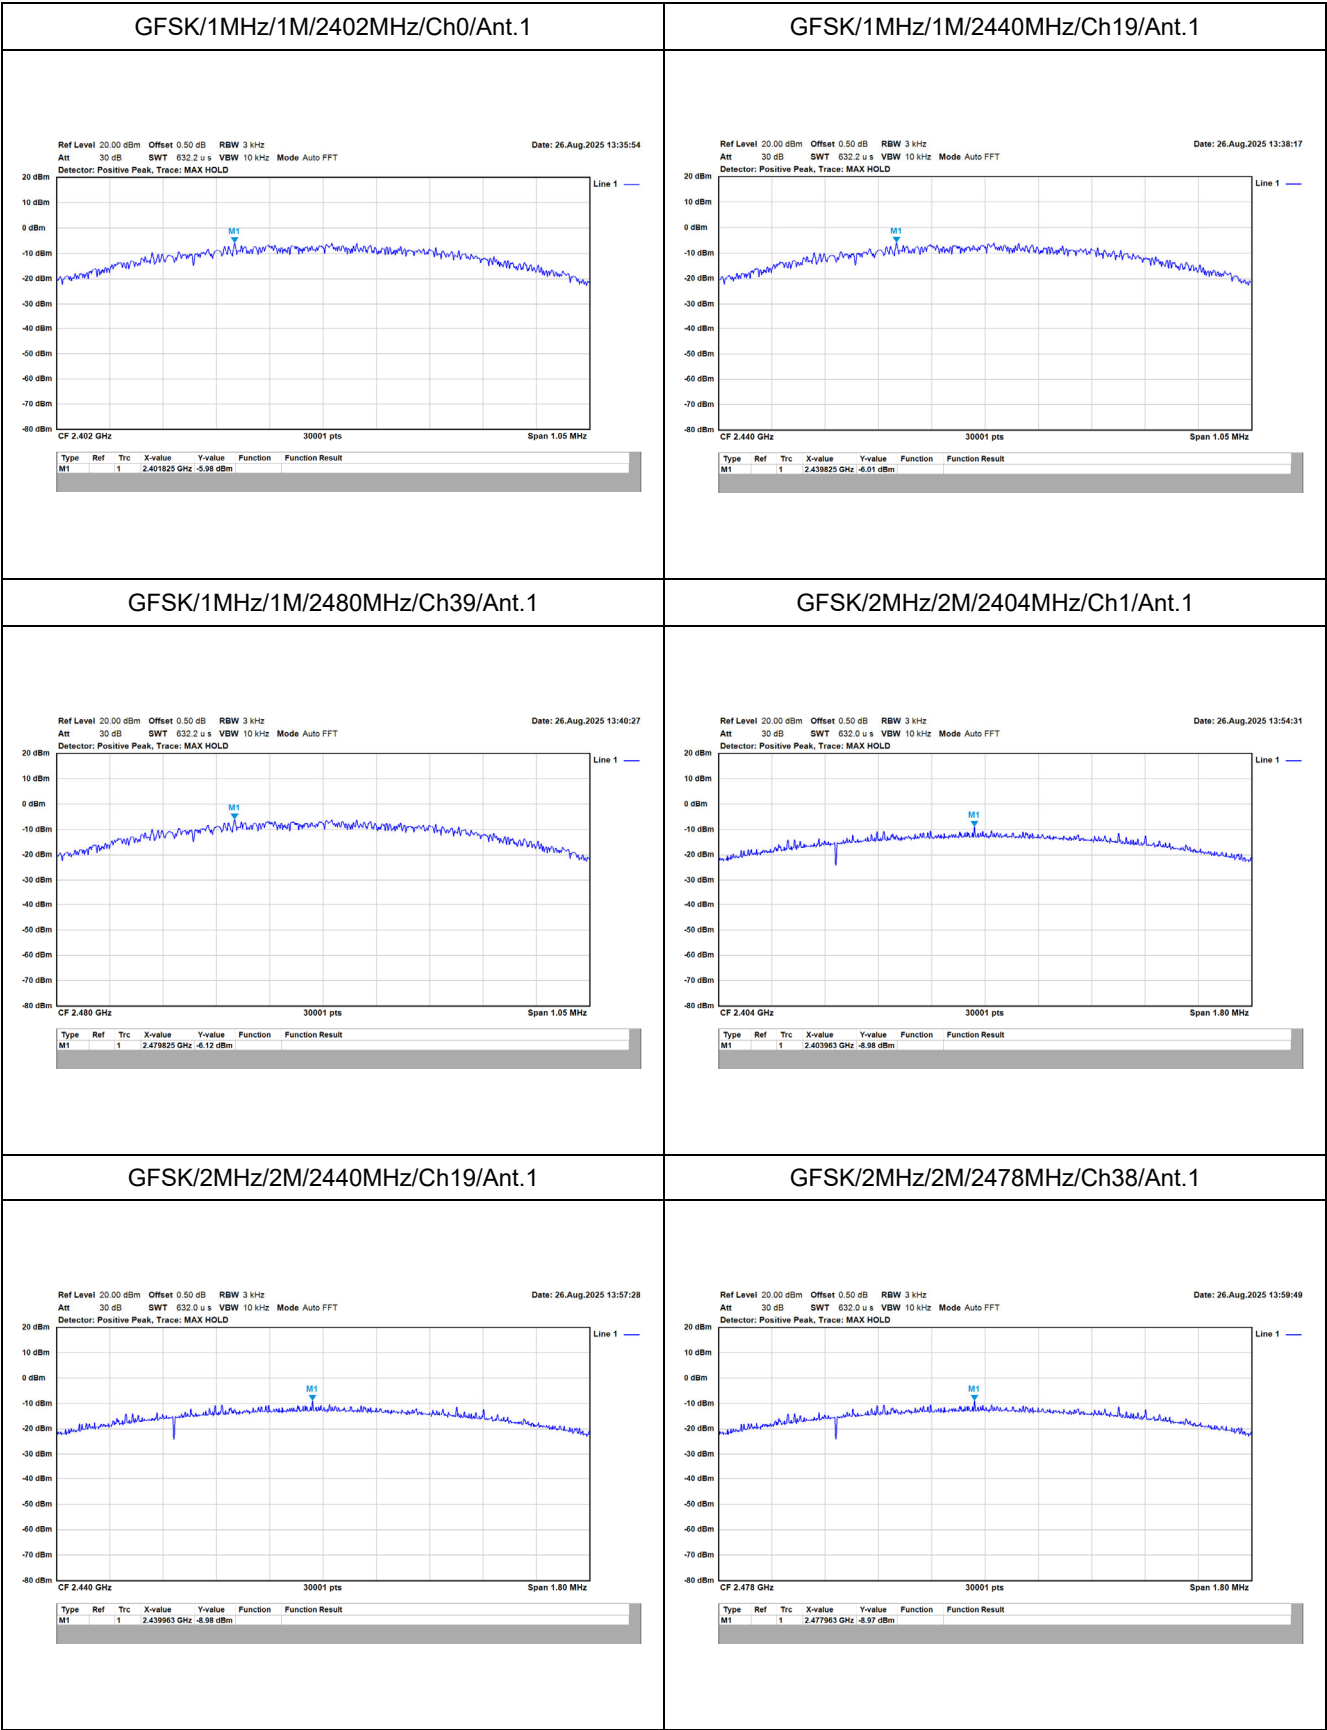

**Appendix E. Test Result of Antenna Port Conducted Emission**

| Modulation    | Measurement Level<br>$\Delta$ (dB) | Result |
|---------------|------------------------------------|--------|
| GFSK (1 Mbps) | > 20                               | PASS   |
| GFSK (2 Mbps) | > 20                               | PASS   |

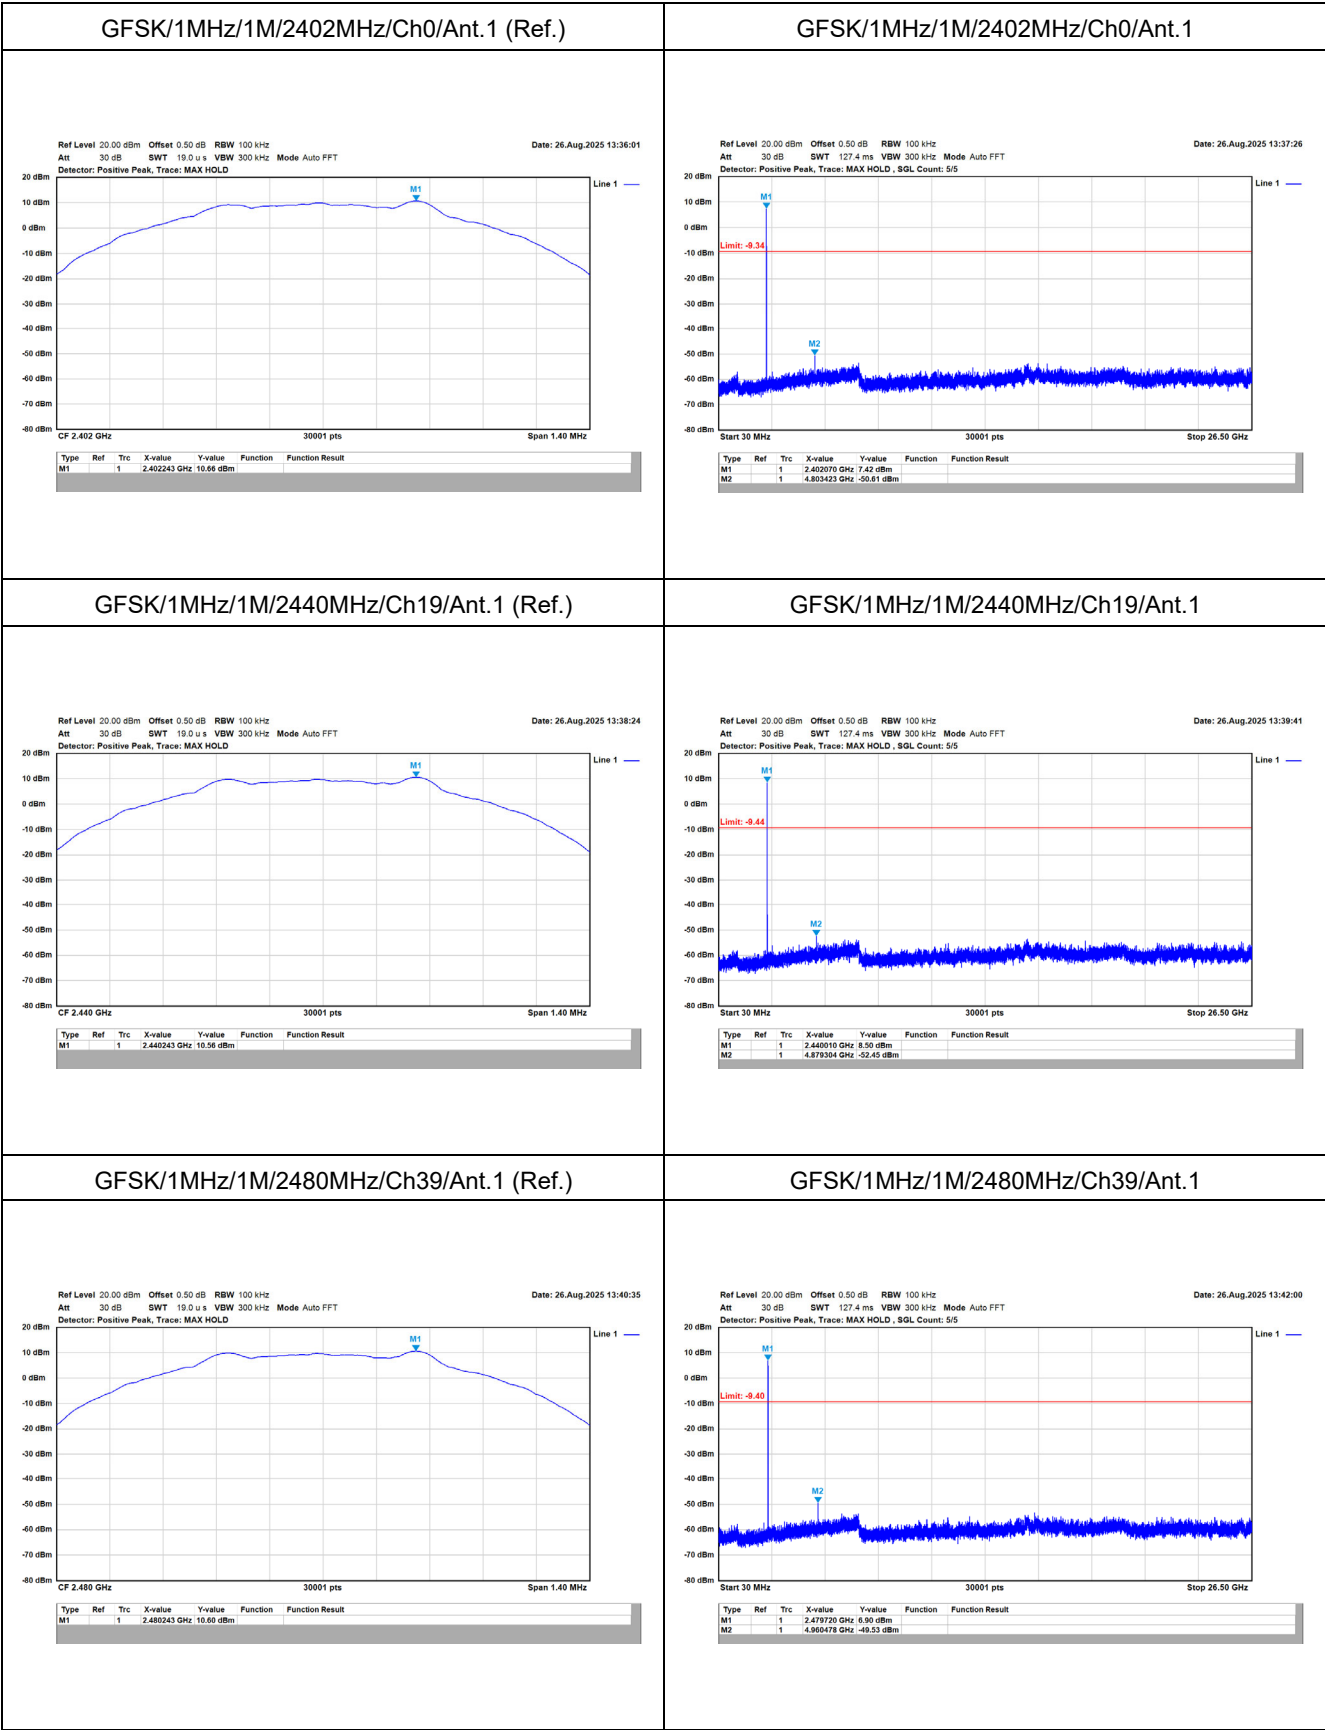

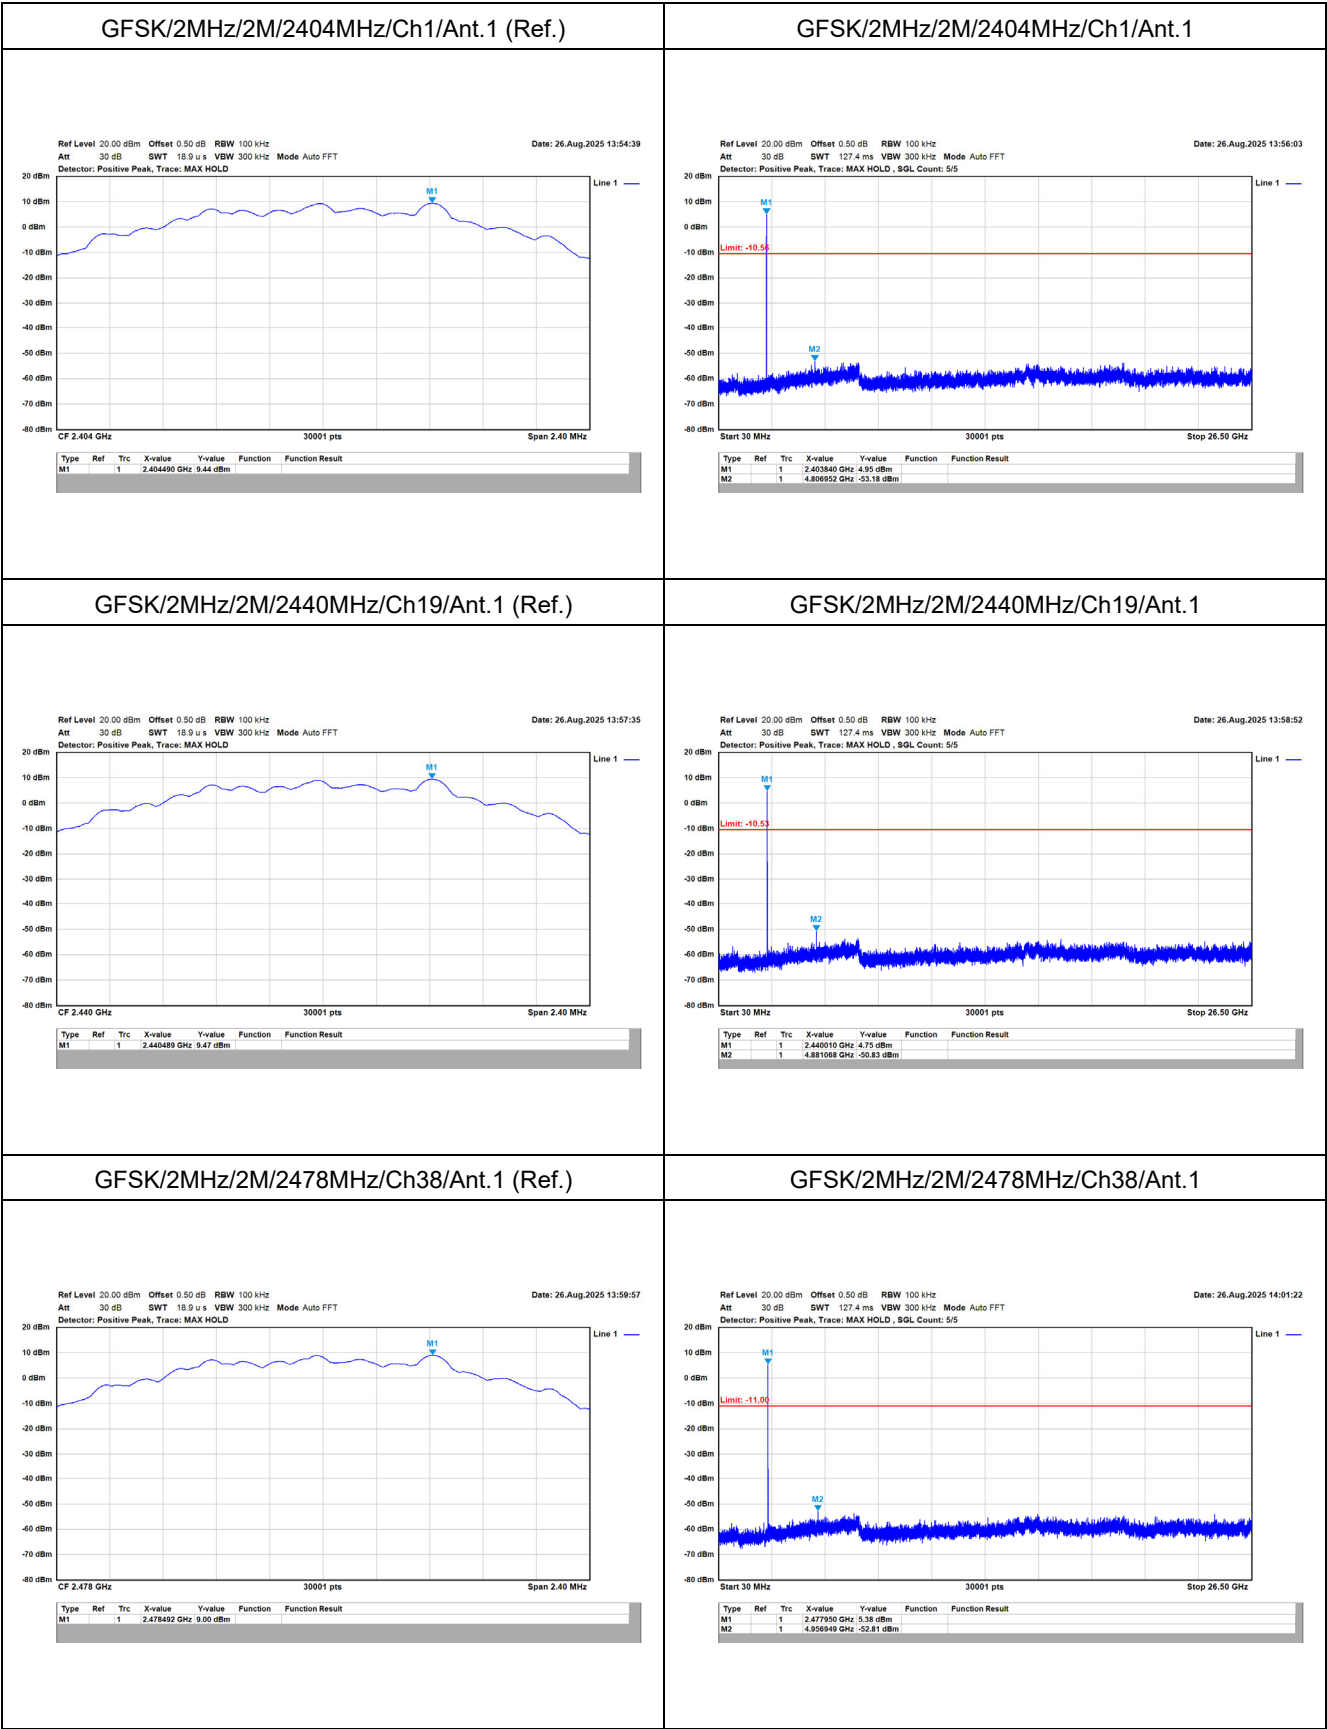




## Appendix F. Test Result of Radiated Emission

TX\_BLE1M\_2402MHz\_H

Site :HY-CB03  
Condition :3m ,Horizontal  
Mode :TX\_BLE1M\_2402MHz  
Test BY :Ashton

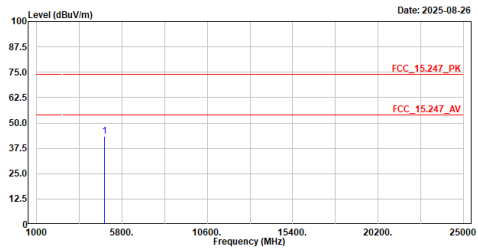


| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | Limit  | Level | dB/m   |        |
| 1   | 4884.000  | 43.58  | 74.00  | -30.42 | 58.53 | -14.95 | Peak   |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX\_BLE1M\_2402MHz\_V

Site :HY-CB03  
Condition :3m ,Vertical  
Mode :TX\_BLE1M\_2402MHz  
Test BY :Ashton

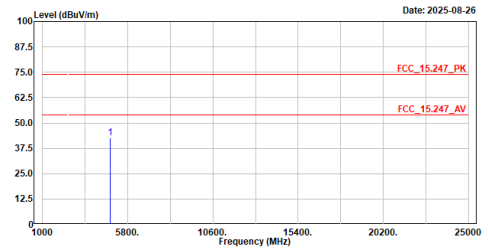


| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | Limit  | Level | dB/m   |        |
| 1   | 4884.000  | 42.48  | 74.00  | -31.52 | 57.43 | -14.95 | Peak   |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX\_BLE1M\_2440MHz\_H

Site :HY-CB03  
Condition :3m ,Horizontal  
Mode :TX\_BLE1M\_2440MHz  
Test BY :Ashton

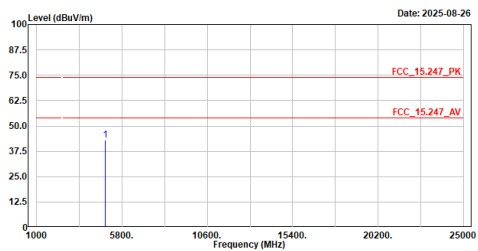


| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | Limit  | Level | dB/m   |        |
| 1   | 4880.000  | 43.06  | 74.00  | -30.94 | 57.65 | -14.59 | Peak   |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX\_BLE1M\_2440MHz\_V

Site :HY-CB03  
Condition :3m ,Vertical  
Mode :TX\_BLE1M\_2440MHz  
Test BY :Ashton

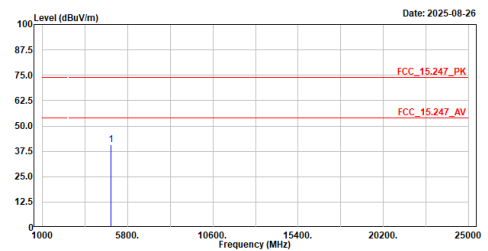


| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | Limit  | Level | dB/m   |        |
| 1   | 4880.000  | 40.69  | 74.00  | -33.31 | 55.28 | -14.59 | Peak   |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

## TX\_BLE1M\_2480MHz\_H

Site :HY-CB03  
Condition :3m ,Horizontal  
Mode :TX\_BLE1M\_2480MHz  
Test BY :Ashton

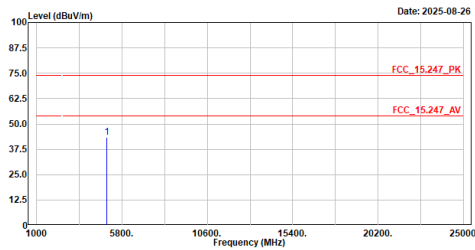


| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | dB     | dBuV  | dB/m   |        |
| 1   | 4960.000  | 43.41  | 74.00  | -30.59 | 57.63 | -14.22 | Peak   |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

## TX\_BLE1M\_2480MHz\_V

Site :HY-CB03  
Condition :3m ,Vertical  
Mode :TX\_BLE1M\_2480MHz  
Test BY :Ashton

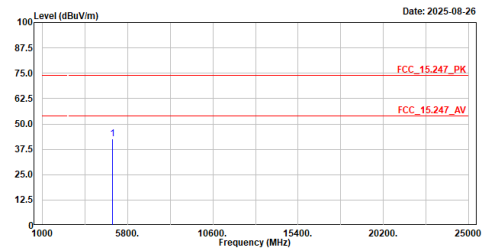


| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | dB     | dBuV  | dB/m   |        |
| 1   | 4960.000  | 42.82  | 74.00  | -31.18 | 57.04 | -14.22 | Peak   |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

## TX\_BLE2M\_2404MHz\_H

Site :HY-CB03  
Condition :3m ,Horizontal  
Mode :TX\_BLE2M\_2404MHz  
Test BY :Ashton

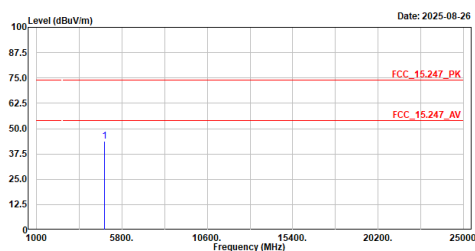


| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | dB     | dBuV  | dB/m   |        |
| 1   | 4808.000  | 43.80  | 74.00  | -30.20 | 58.74 | -14.94 | Peak   |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

## TX\_BLE2M\_2404MHz\_V

Site :HY-CB03  
Condition :3m ,Vertical  
Mode :TX\_BLE2M\_2404MHz  
Test BY :Ashton

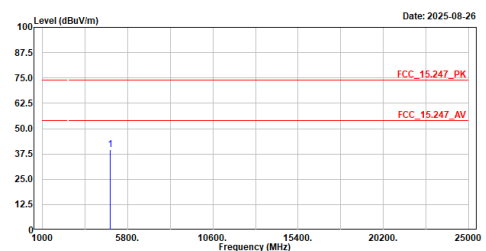


| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | dB     | dBuV  | dB/m   |        |
| 1   | 4808.000  | 39.52  | 74.00  | -34.48 | 54.46 | -14.94 | Peak   |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

## TX\_BLE2M\_2440MHz\_H

Site :HY-CB03  
Condition :3m ,Horizontal  
Mode :TX\_BLE2M\_2440MHz  
Test BY :Ashton

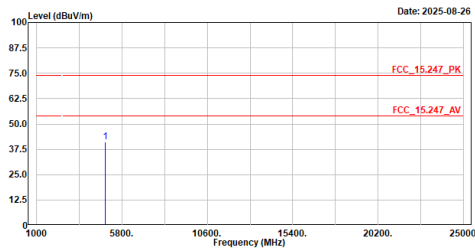


| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | dB     | dBuV  | dB/m   |        |
| 1   | 4880.000  | 41.13  | 74.00  | -32.87 | 55.72 | -14.59 | Peak   |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

## TX\_BLE2M\_2440MHz\_V

Site :HY-CB03  
Condition :3m ,Vertical  
Mode :TX\_BLE2M\_2440MHz  
Test BY :Ashton

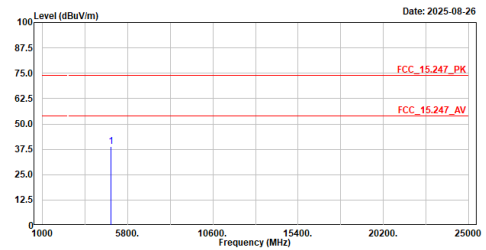


| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | dB     | dBuV  | dB/m   |        |
| 1   | 4880.000  | 38.86  | 74.00  | -35.14 | 53.45 | -14.59 | Peak   |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

## TX\_BLE2M\_2478MHz\_H

Site :HY-CB03  
Condition :3m ,Horizontal  
Mode :TX\_BLE2M\_2478MHz  
Test BY :Ashton

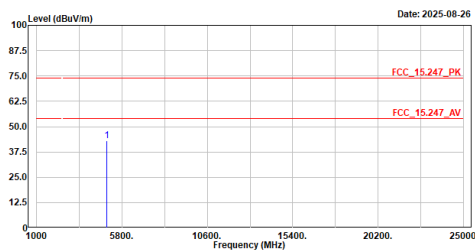


| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | dB     | dBuV  | dB/m   |        |
| 1   | 4956.000  | 43.20  | 74.00  | -30.80 | 57.43 | -14.23 | Peak   |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

## TX\_BLE2M\_2478MHz\_V

Site :HY-CB03  
Condition :3m ,Vertical  
Mode :TX\_BLE2M\_2478MHz  
Test BY :Ashton

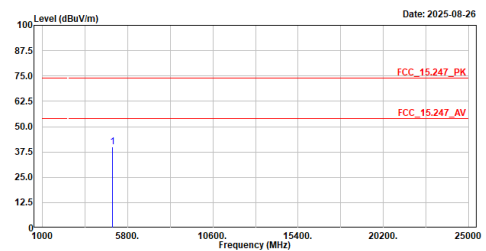


| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | dB     | dBuV  | dB/m   |        |
| 1   | 4956.000  | 40.16  | 74.00  | -33.84 | 54.39 | -14.23 | Peak   |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

## TX BLE2M 2440MHz H QP

Site :HY-CB03  
Condition :3m ,Horizontal  
Mode :TX\_BLE2M\_2440MHz  
Test BY :Ashton

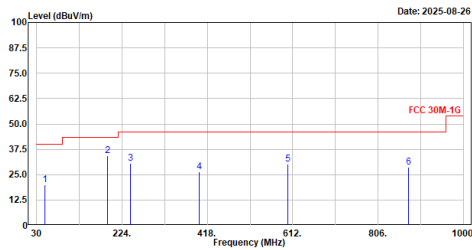


| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | Limit  | Level | dB/m   |        |
| 1   | 48.430    | 20.00  | 40.00  | -20.00 | 43.43 | -23.43 | QP     |
| 2   | 191.990   | 34.52  | 43.50  | -8.98  | 61.31 | -26.79 | QP     |
| 3   | 243.400   | 30.42  | 46.00  | -15.58 | 55.37 | -24.95 | QP     |
| 4   | 399.570   | 26.30  | 46.00  | -19.70 | 46.74 | -20.44 | QP     |
| 5   | 600.360   | 30.33  | 46.00  | -15.67 | 45.93 | -15.60 | QP     |
| 6   | 875.840   | 28.81  | 46.00  | -17.19 | 40.97 | -12.16 | QP     |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

## TX BLE2M 2440MHz V QP

Site :HY-CB03  
Condition :3m ,Vertical  
Mode :TX\_BLE2M\_2440MHz  
Test BY :Ashton

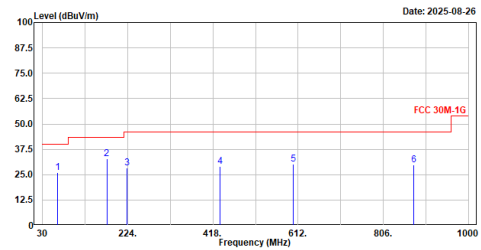


| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | Limit  | Level | dB/m   |        |
| 1   | 64.920    | 25.89  | 40.00  | -14.11 | 51.25 | -25.36 | QP     |
| 2   | 176.470   | 32.88  | 43.50  | -10.62 | 57.34 | -24.46 | QP     |
| 3   | 223.030   | 28.23  | 46.00  | -17.77 | 55.12 | -26.89 | QP     |
| 4   | 433.520   | 29.19  | 46.00  | -16.81 | 48.55 | -19.36 | QP     |
| 5   | 600.360   | 30.32  | 46.00  | -15.68 | 45.92 | -15.60 | QP     |
| 6   | 875.840   | 29.99  | 46.00  | -16.01 | 42.15 | -12.16 | QP     |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

## TX BLE1M 2402MHz H Average

Site :HY-CB03  
Condition :3m ,Horizontal  
Mode :TX\_BLE1M\_2402MHz  
Test BY :Caster

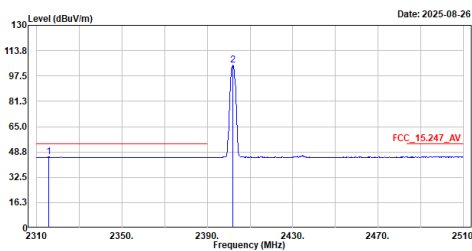


| No. | Frequency | Level  | Limit  | Over  | Read  | Factor | Remark  |
|-----|-----------|--------|--------|-------|-------|--------|---------|
|     | MHz       | dBuV/m | dBuV/m | Limit | Level | dB/m   |         |
| 1   | 2315.800  | 45.47  | 54.00  | -8.53 | 14.86 | 30.61  | Average |
| 2   | 2402.000  | 104.33 | -----  | ----- | 73.87 | 30.46  | Average |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

## TX BLE1M 2402MHz H Peak

Site :HY-CB03  
Condition :3m ,Horizontal  
Mode :TX\_BLE1M\_2402MHz  
Test BY :Caster

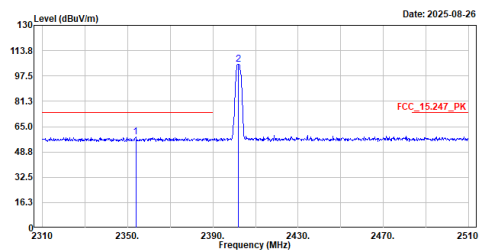


| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | Limit  | Level | dB/m   |        |
| 1   | 2353.800  | 58.21  | 74.00  | -15.79 | 27.79 | 30.42  | Peak   |
| 2   | 2401.800  | 104.90 | -----  | -----  | 74.44 | 30.46  | Peak   |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

## TX BLE1M 2402MHz\_V Average

Site :HY-CB03  
Condition :3m ,Vertical  
Mode :TX\_BLE1M\_2402MHz  
Test BY :Caster

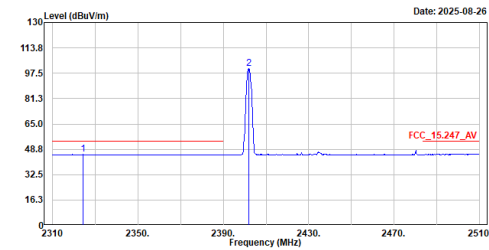


| No. | Frequency | Level  | Limit  | Over  | Read  | Factor | Remark  |
|-----|-----------|--------|--------|-------|-------|--------|---------|
|     | MHz       | dBuV/m | dBuV/m | Limit | Level | dB/m   |         |
| 1   | 2324.400  | 45.41  | 54.00  | -8.59 | 14.84 | 30.57  | Average |
| 2   | 2402.000  | 100.51 | -----  | ----- | 70.05 | 30.46  | Average |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

## TX BLE1M 2402MHz\_V Peak

Site :HY-CB03  
Condition :3m ,Vertical  
Mode :TX\_BLE1M\_2402MHz  
Test BY :Caster

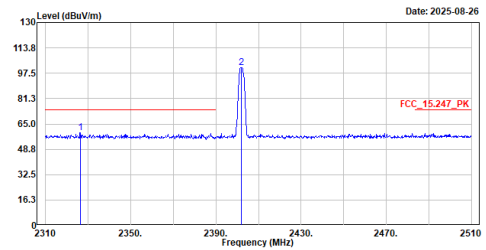


| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | Limit  | Level | dB/m   |        |
| 1   | 2326.400  | 59.39  | 74.00  | -14.61 | 28.84 | 30.55  | Peak   |
| 2   | 2401.800  | 101.08 | -----  | -----  | 70.62 | 30.46  | Peak   |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

## TX BLE1M 2480MHz\_H Average

Site :HY-CB03  
Condition :3m ,HORIZONTAL  
Mode :TX\_BLE1M\_2480MHz  
Test BY :Caster

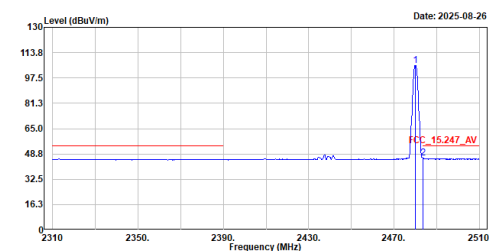


| No. | Frequency | Level  | Limit  | Over  | Read  | Factor | Remark  |
|-----|-----------|--------|--------|-------|-------|--------|---------|
|     | MHz       | dBuV/m | dBuV/m | Limit | Level | dB/m   |         |
| 1   | 2480.000  | 105.56 | -----  | ----- | 75.17 | 30.39  | Average |
| 2   | 2483.600  | 46.05  | 54.00  | -7.95 | 15.61 | 30.44  | Average |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

## TX BLE1M 2480MHz\_H Peak

Site :HY-CB03  
Condition :3m ,HORIZONTAL  
Mode :TX\_BLE1M\_2480MHz  
Test BY :Caster

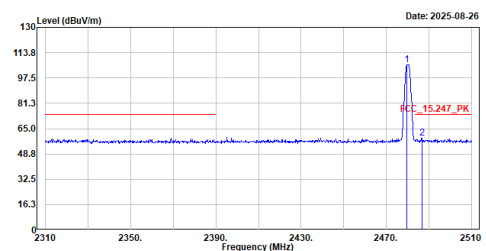


| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | Limit  | Level | dB/m   |        |
| 1   | 2479.800  | 106.15 | -----  | -----  | 75.76 | 30.39  | Peak   |
| 2   | 2486.800  | 58.95  | 74.00  | -15.05 | 28.48 | 30.47  | Peak   |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

## TX BLE1M 2480MHz\_V Average

Site :HY-CB03  
Condition :3m ,Vertical  
Mode :TX\_BLE1M\_2480MHz  
Test BY :Caster

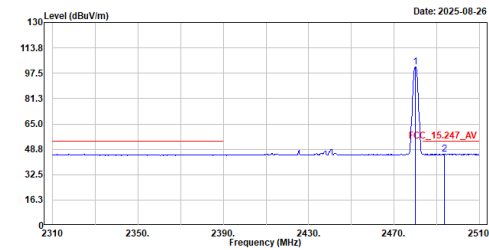


| No. | Frequency | Level  | Limit | Over  | Read  | Factor | Remark  |
|-----|-----------|--------|-------|-------|-------|--------|---------|
|     | MHz       | dBuV/m | Line  | Limit | Level | dB/m   |         |
| 1   | 2480.000  | 101.73 | ----- | ----- | 71.34 | 30.39  | Average |
| 2   | 2493.600  | 45.60  | 54.00 | -8.40 | 15.10 | 30.50  | Average |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

## TX BLE1M 2480MHz\_V Peak

Site :HY-CB03  
Condition :3m ,Vertical  
Mode :TX\_BLE1M\_2480MHz  
Test BY :Caster

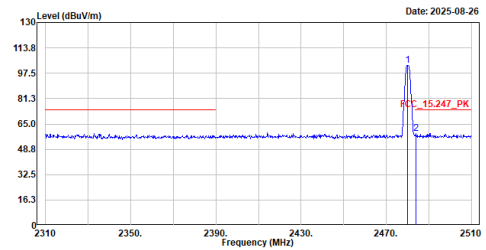


| No. | Frequency | Level  | Limit | Over   | Read  | Factor | Remark |
|-----|-----------|--------|-------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | Line  | Limit  | Level | dB/m   |        |
| 1   | 2480.000  | 102.42 | ----- | -----  | 72.03 | 30.39  | Peak   |
| 2   | 2483.800  | 58.91  | 74.00 | -15.09 | 28.47 | 30.44  | Peak   |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

## TX BLE2M 2404MHz\_H Average

Site :HY-CB03  
Condition :3m ,HORIZONTAL  
Mode :TX\_BLE2M\_2404MHz  
Test BY :Caster

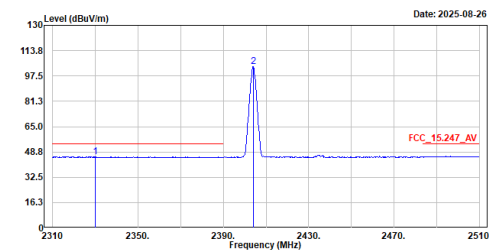


| No. | Frequency | Level  | Limit | Over  | Read  | Factor | Remark  |
|-----|-----------|--------|-------|-------|-------|--------|---------|
|     | MHz       | dBuV/m | Line  | Limit | Level | dB/m   |         |
| 1   | 2330.000  | 45.64  | 54.00 | -8.36 | 15.13 | 30.51  | Average |
| 2   | 2404.000  | 103.65 | ----- | ----- | 73.16 | 30.49  | Average |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

## TX BLE2M 2404MHz\_H Peak

Site :HY-CB03  
Condition :3m ,HORIZONTAL  
Mode :TX\_BLE2M\_2404MHz  
Test BY :Caster

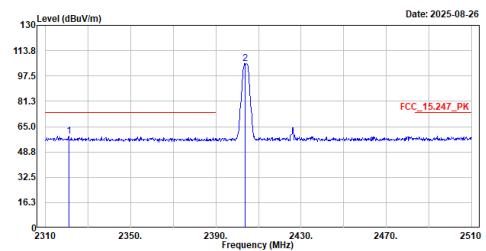


| No. | Frequency | Level  | Limit | Over   | Read  | Factor | Remark |
|-----|-----------|--------|-------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | Line  | Limit  | Level | dB/m   |        |
| 1   | 2321.000  | 58.86  | 74.00 | -15.14 | 28.26 | 30.60  | Peak   |
| 2   | 2403.600  | 105.33 | ----- | -----  | 74.84 | 30.49  | Peak   |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

## TX BLE2M 2404MHz\_V Average

Site :HY-CB03  
Condition :3m ,VERTICAL  
Mode :TX\_BLE2M\_2404MHz  
Test BY :Caster

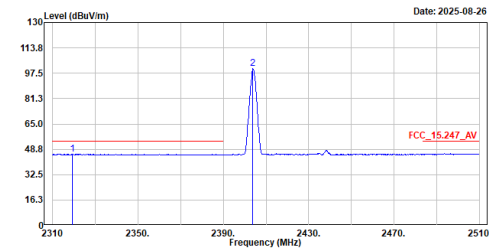


| No. | Frequency | Level  | Limit  | Over  | Read  | Factor | Remark  |
|-----|-----------|--------|--------|-------|-------|--------|---------|
|     | MHz       | dBuV/m | dBuV/m | Limit | Level | dB/m   |         |
| 1   | 2319.400  | 45.73  | 54.00  | -8.27 | 15.12 | 30.61  | Average |
| 2   | 2403.800  | 100.40 | -----  | ----- | 69.91 | 30.49  | Average |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

## TX BLE2M 2404MHz\_V Peak

Site :HY-CB03  
Condition :3m ,VERTICAL  
Mode :TX\_BLE2M\_2404MHz  
Test BY :Caster

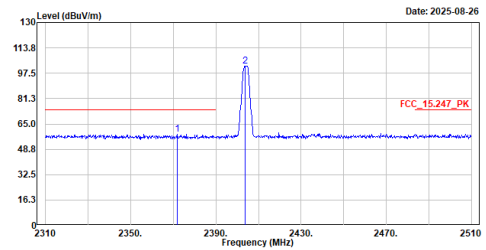


| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | Limit  | Level | dB/m   |        |
| 1   | 2372.000  | 58.37  | 74.00  | -15.63 | 27.94 | 30.43  | Peak   |
| 2   | 2403.600  | 102.28 | -----  | -----  | 71.79 | 30.49  | Peak   |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

## TX BLE2M 2478MHz\_H Average

Site :HY-CB03  
Condition :3m ,HORIZONTAL  
Mode :TX\_BLE2M\_2478MHz  
Test BY :Caster

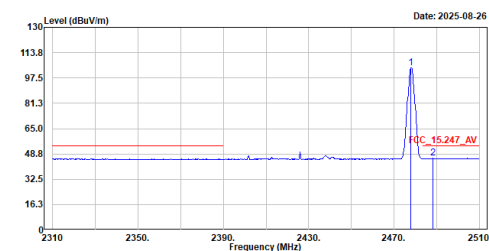


| No. | Frequency | Level  | Limit  | Over  | Read  | Factor | Remark  |
|-----|-----------|--------|--------|-------|-------|--------|---------|
|     | MHz       | dBuV/m | dBuV/m | Limit | Level | dB/m   |         |
| 1   | 2478.000  | 104.23 | -----  | ----- | 73.84 | 30.39  | Average |
| 2   | 2488.200  | 45.89  | 54.00  | -8.11 | 15.41 | 30.48  | Average |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

## TX BLE2M 2478MHz\_H Peak

Site :HY-CB03  
Condition :3m ,HORIZONTAL  
Mode :TX\_BLE2M\_2478MHz  
Test BY :Caster

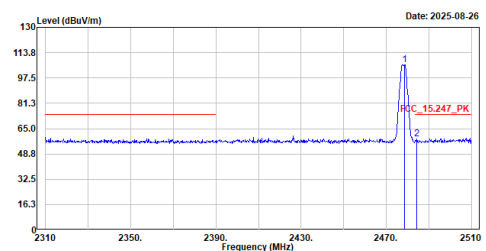

| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | Limit  | Level | dB/m   |        |
| 1   | 2478.000  | 105.88 | -----  | -----  | 75.49 | 30.39  | Peak   |
| 2   | 2484.400  | 58.62  | 74.00  | -15.38 | 28.18 | 30.44  | Peak   |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

