


Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Type approval holder: RTX Telecom A/S
EUT : GN9300 UPCS Base
Model: GN9300 / Ch.: 4, 2, 0 / ant.: 2
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 23°C / 120 V AC (AC/DC adaptor)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HK 116,
Comment 2: Freq:179.411MHz Pmax:-55.20dBm RBW: 100 kHz

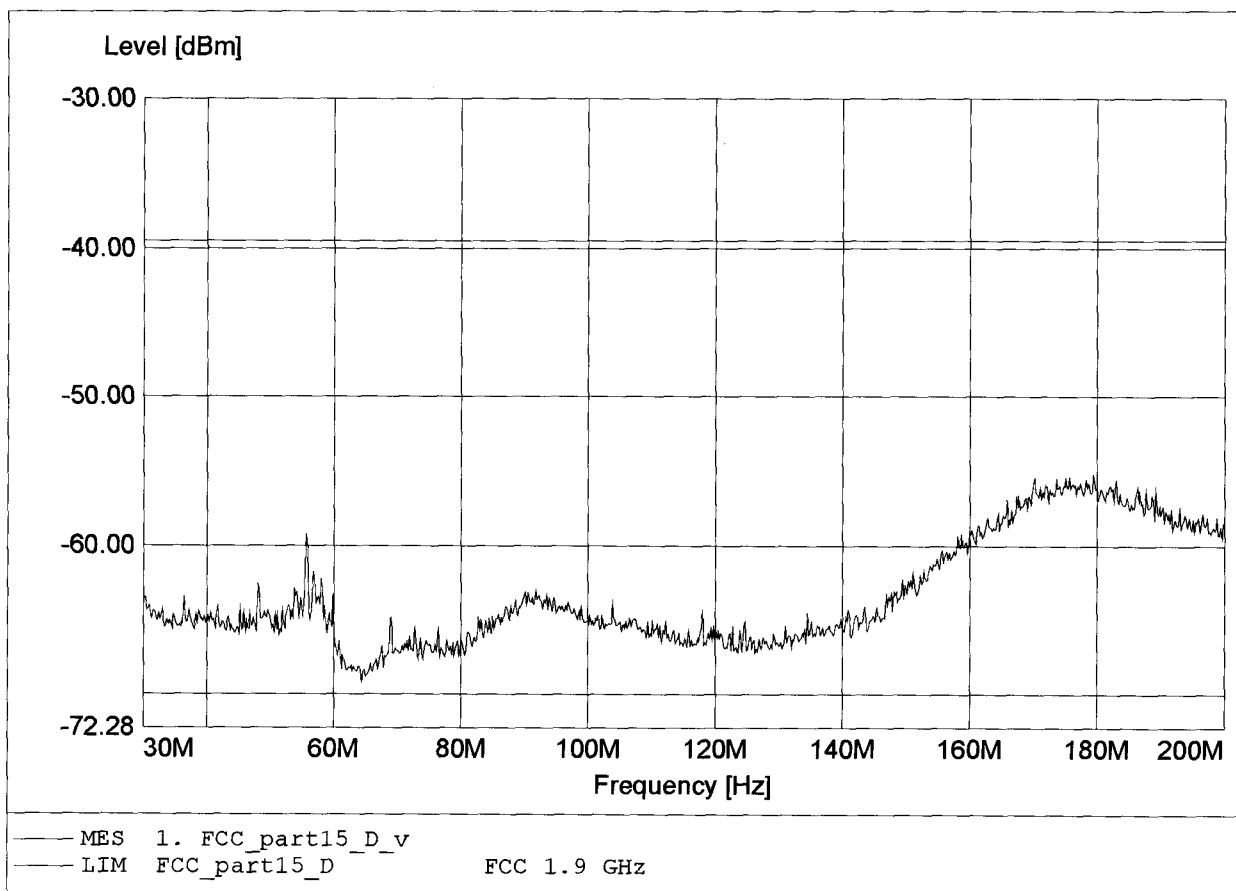

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Type approval holder: RTX Telecom A/S
EUT : GN9300 UPCS Base
Model: GN9300 / Ch.: 4, 2, 0 / ant.: 2
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 23°C / 120 V AC (AC/DC adaptor)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HK 116,
Comment 2: Freq:192.067MHz Pmax:-59.91dBm RBW: 100 kHz

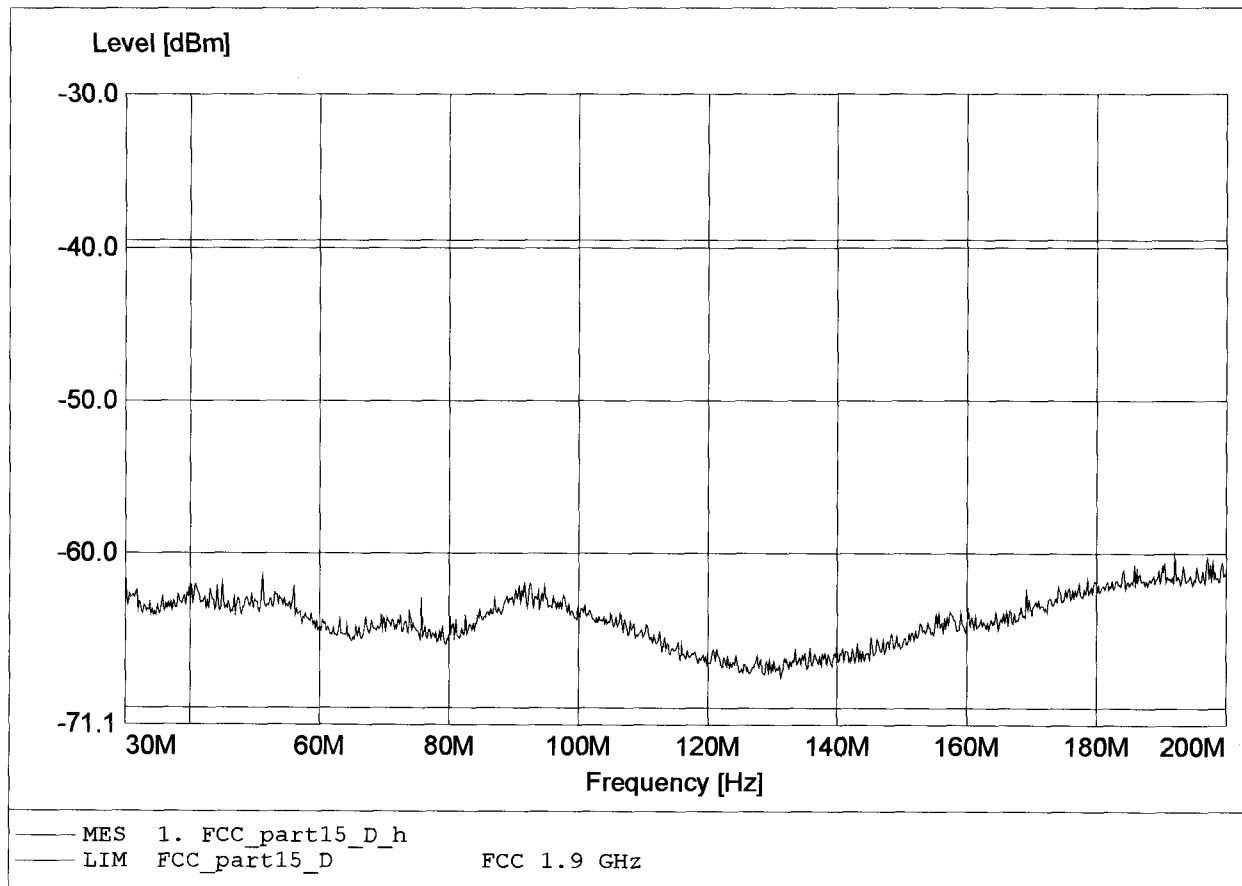

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Type approval holder: RTX Telecom A/S
EUT : GN9300 UPCS Base
Model: GN9300 / Ch.: 4, 2, 0 / ant.: 2
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 23°C / 120 V AC (AC/DC adaptor)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
Comment 2: Freq: 601.778MHz Pmax: -58.44dBm RBW: 100 kHz

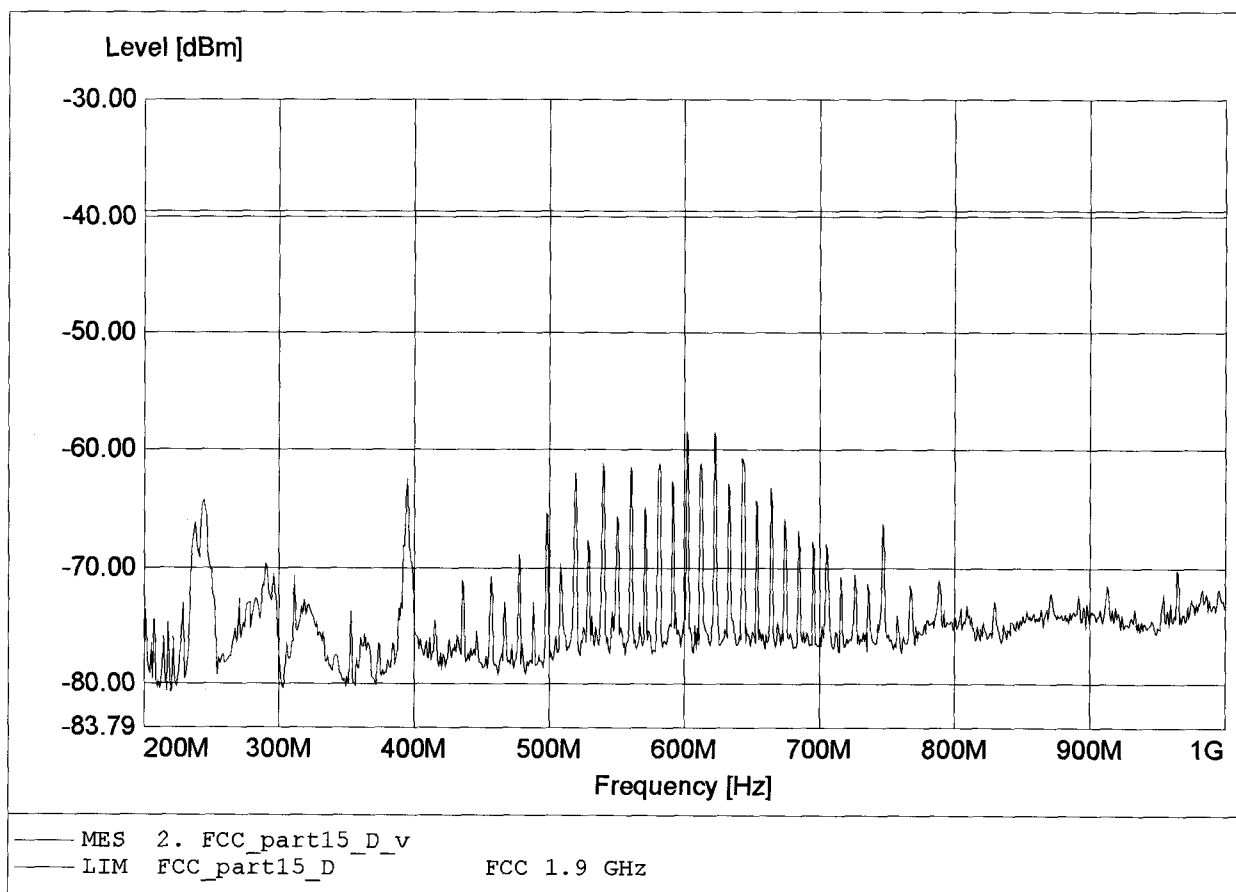

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Type approval holder: RTX Telecom A/S
EUT : GN9300 UPCS Base
Model: GN9300 / Ch.: 4, 2, 0 / ant.: 2
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 23°C / 120 V AC (AC/DC adaptor)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
Comment 2: Freq:622.222MHz Pmax:-60.96dBm RBW: 100 kHz

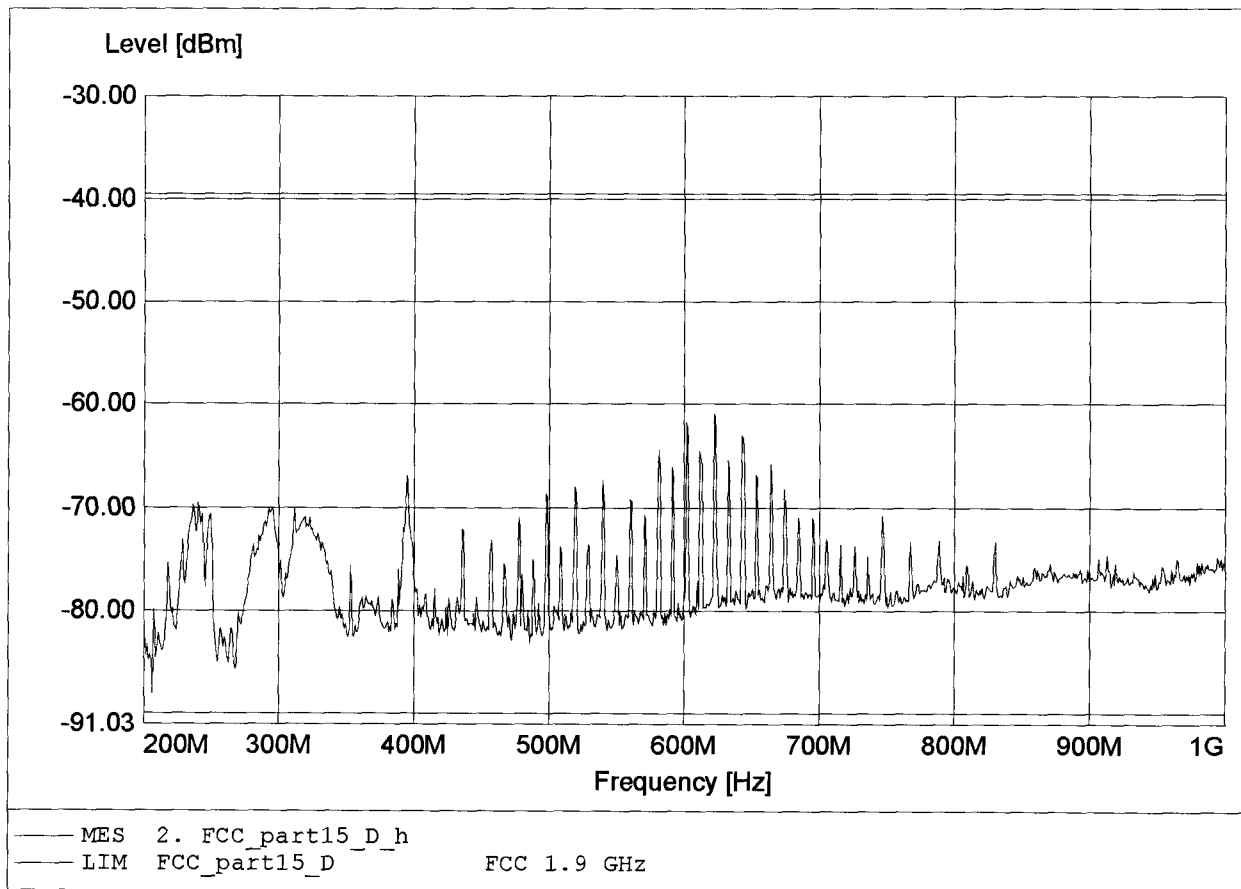

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D

Type approval holder: RTX Telecom A/S
EUT : GN9300 UPCS Base
Model: GN9300 / Ch.: 4 / ant.: 2
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 23°C / 120 V AC (AC/DC adaptor)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:1.915GHz Pmax:-24.20dBm RBW: 1 MHz

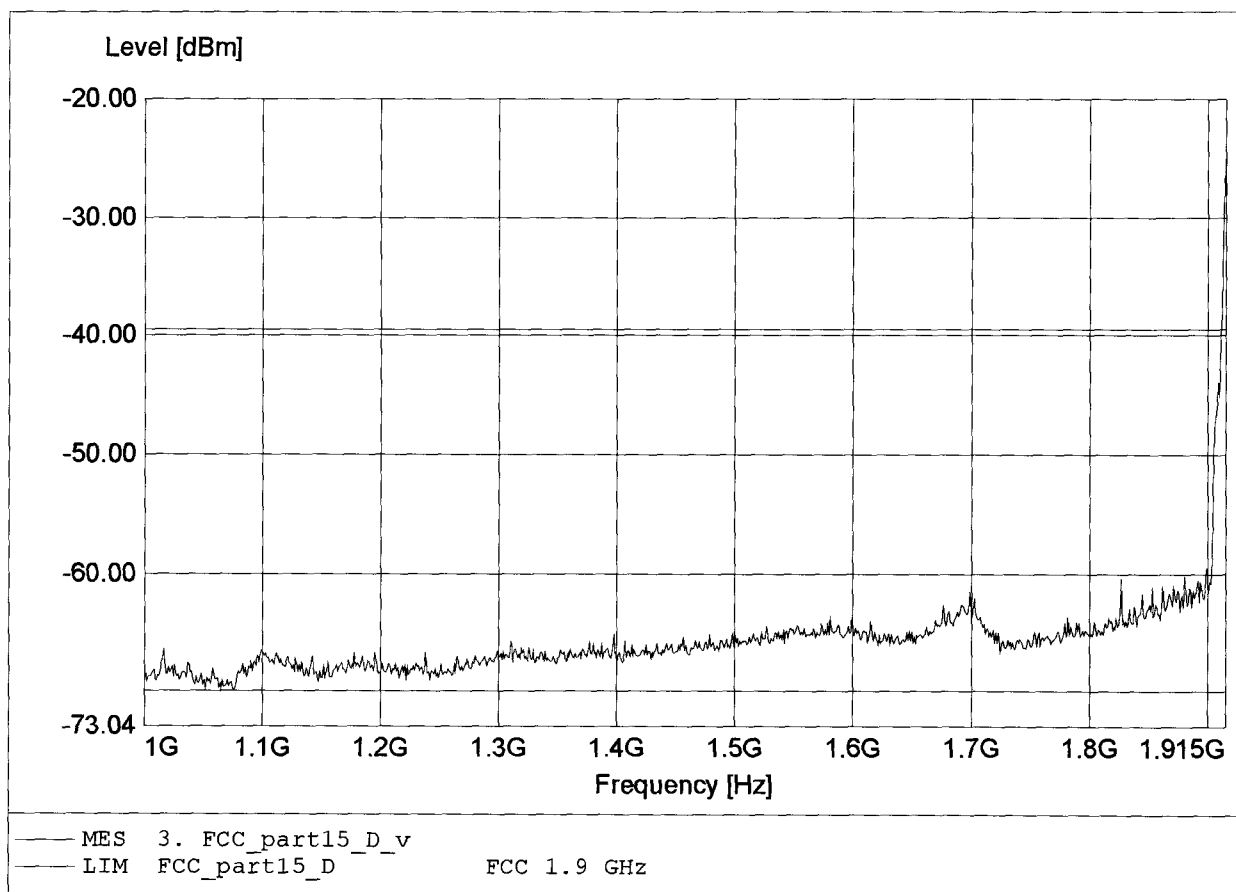

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D

Type approval holder: RTX Telecom A/S

EUT : GN9300 UPCS Base

Model: GN9300 / Ch.: 4, 2, 0 / ant.: 2


Test Site / Operator: ETS / Mr. Handrik

Temperature/ Voltage: 23°C / 120 V AC (AC/DC adaptor)

Test Specification: Fully anechoic chamber / mode: Tx

Comment 1: Dist.: 1m, Ant.: HL 025, ampl.


Comment 2: Freq:1.915GHz Pmax:-43.55dBm RBW: 100 kHz

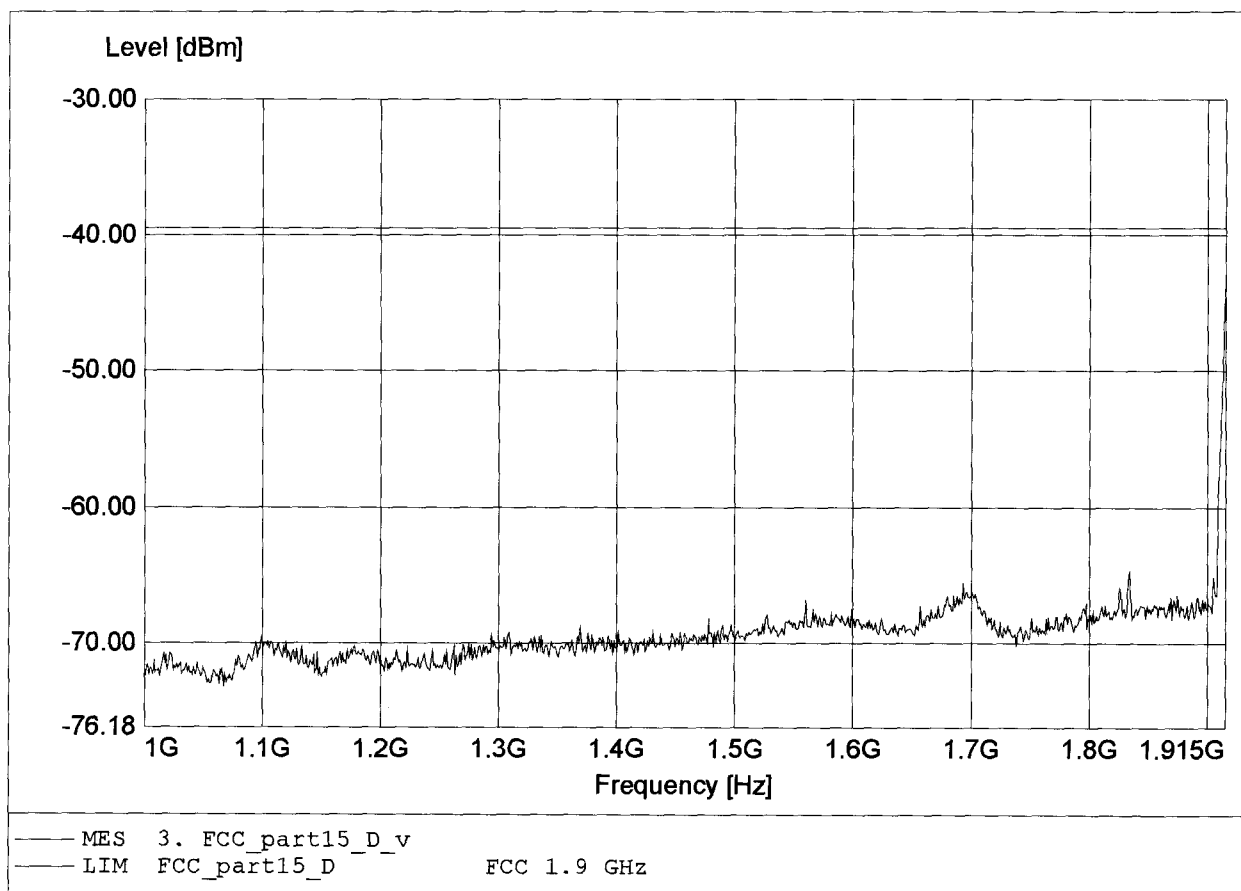

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D

Type approval holder: RTX Telecom A/S
EUT : GN9300 UPCS Base
Model: GN9300 / Ch.: 4, 2, 0 / ant.: 2
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 23°C / 120 V AC (AC/DC adaptor)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:1.915GHz Pmax:-48.82dBm RBW: 100 kHz

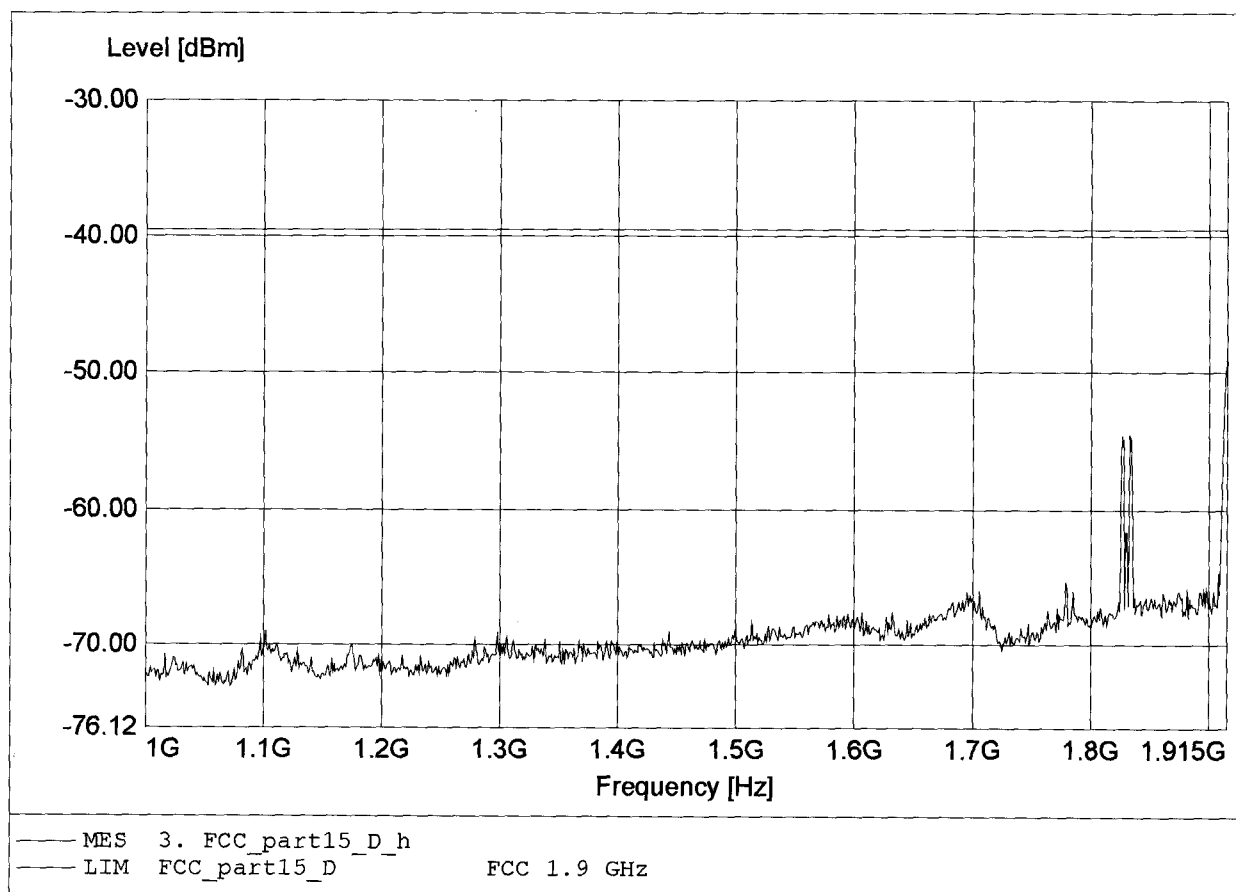

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)

Type approval holder: RTX Telecom A/S

EUT : GN9300 UPCS Base

Model: GN9300 / Ch.: 4, 2, 0 / ant.: 2


Test Site / Operator: ETS / Mr. Handrik

Temperature/ Voltage: 23°C / 120 V AC (AC/DC adaptor)

Test Specification: Fully anechoic chamber / mode: Tx

Comment 1: Dist.: 1m, Ant.: HL 025, ampl.


Comment 2: Freq:1.930GHz Pmax:-42.97dBm RBW: 10 kHz

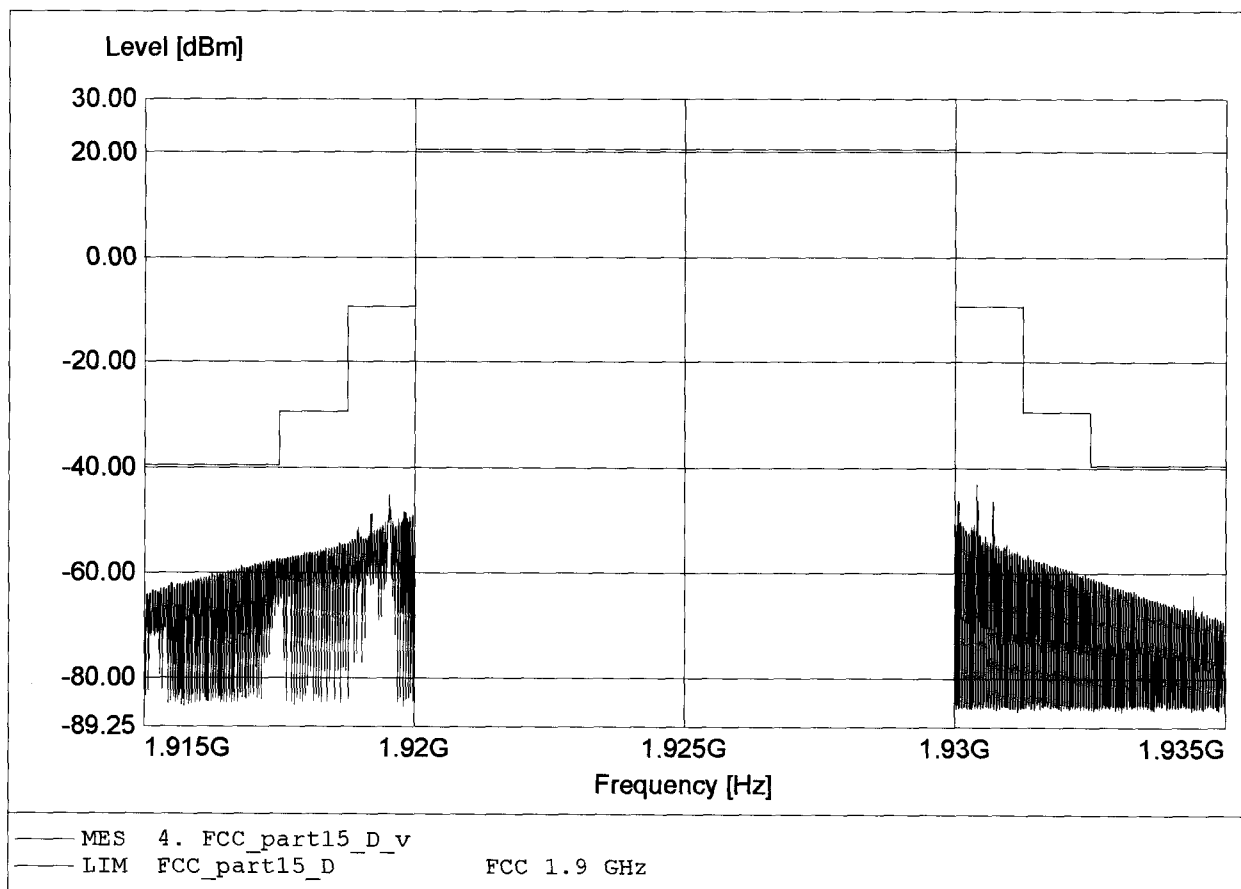

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Type approval holder: RTX Telecom A/S
EUT : GN9300 UPCS Base
Model: GN9300 / Ch.: 4, 2, 0 / ant.: 2
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 23°C / 120 V AC (AC/DC adaptor)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:1.930GHz Pmax:-44.17dBm RBW: 10 kHz

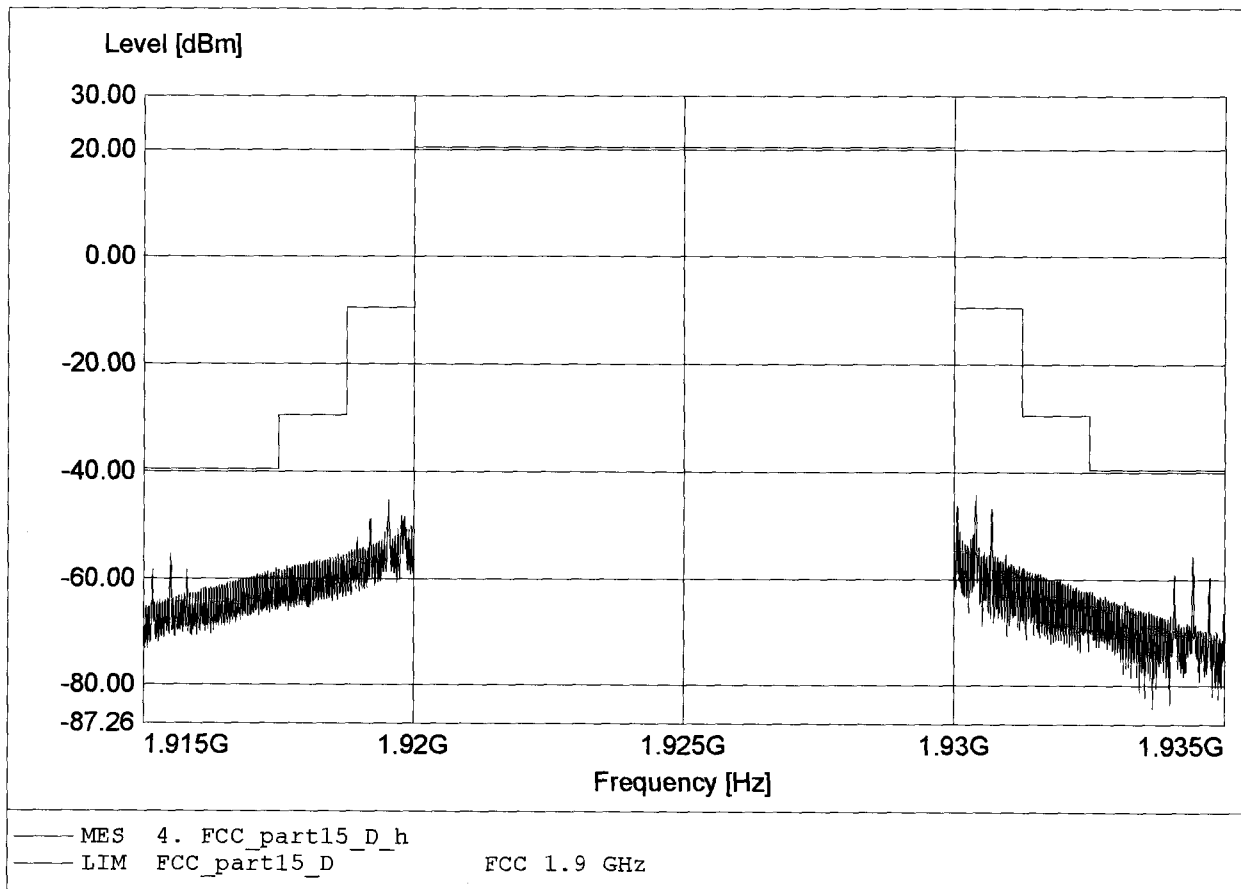

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Type approval holder: RTX Telecom A/S
EUT : GN9300 UPCS Base
Model: GN9300 / Ch.: 4, 2, 0 / ant.: 2
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 23°C / 120 V AC (AC/DC adaptor)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:3.851GHz Pmax:-40.36dBm RBW: 100 kHz

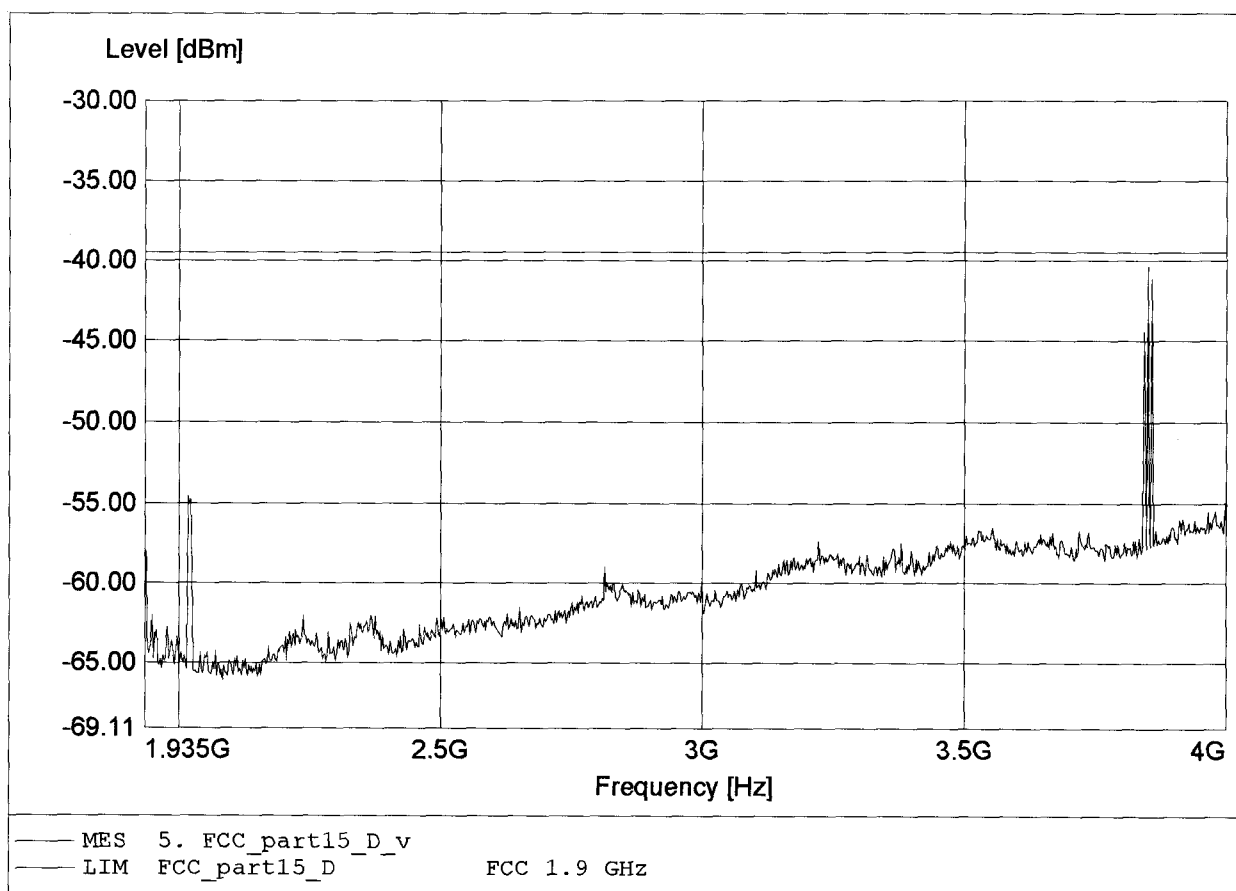

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Type approval holder: RTX Telecom A/S
EUT : GN9300 UPCS Base
Model: GN9300 / Ch.: 4, 2, 0 / ant.: 2
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 23°C / 120 V AC (AC/DC adaptor)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:3.844GHz Pmax:-38.10dBm RBW: 100 kHz

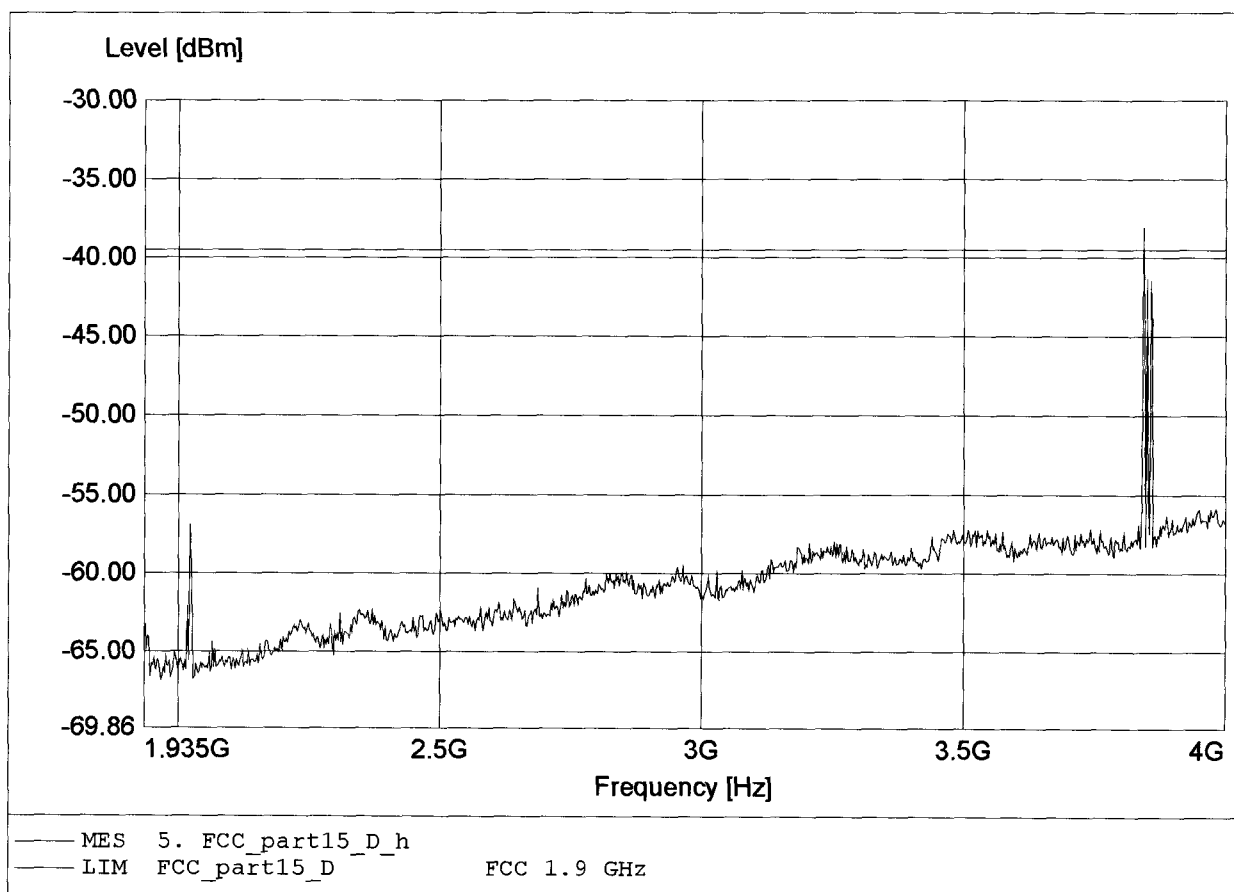

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Type approval holder: RTX Telecom A/S
EUT : GN9300 UPCS Base
Model: GN9300 / Ch.: 4, 2, 0 / ant.: 2
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 23°C / 120 V AC (AC/DC adaptor)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:3.851GHz Pmax:-43.03dBm RBW:10 kHz

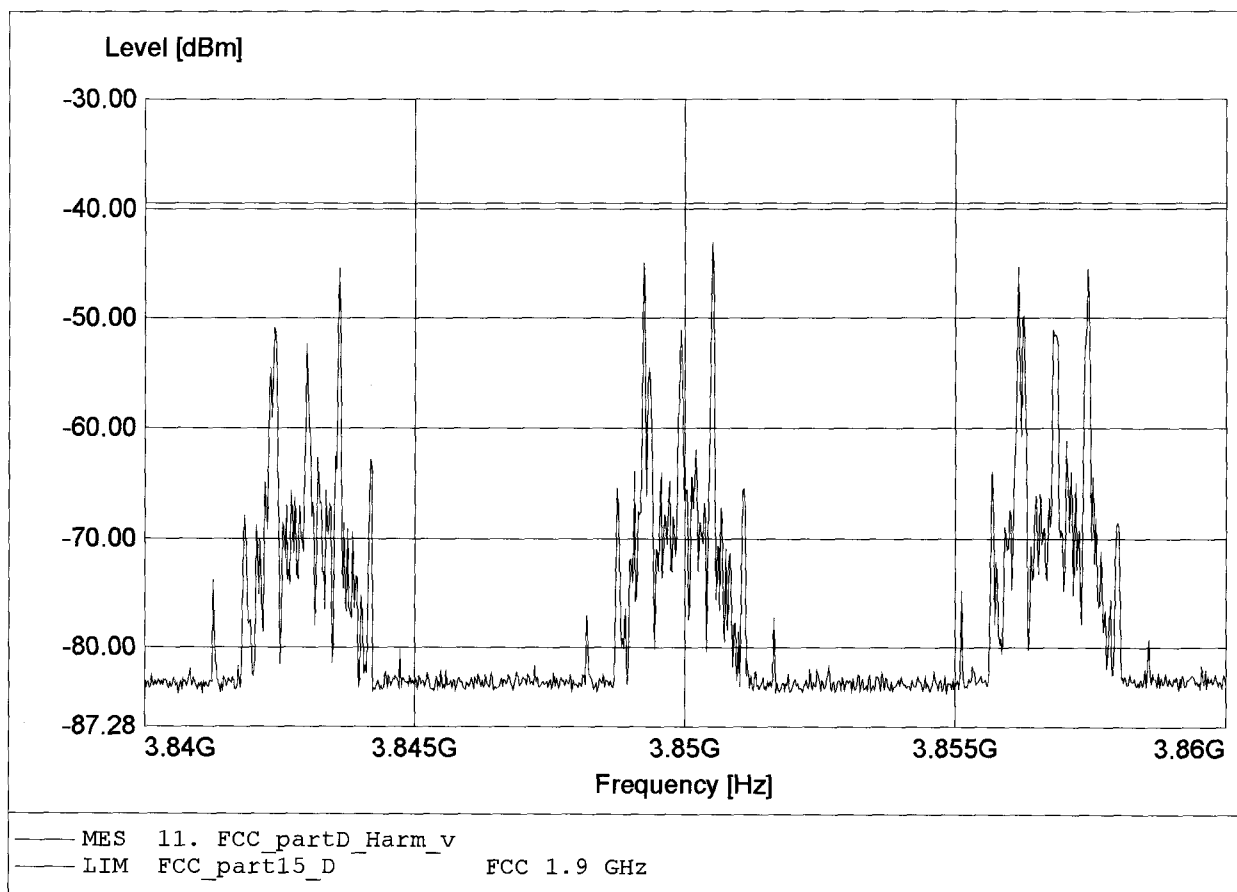

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)

Type approval holder: RTX Telecom A/S
EUT : GN9300 UPCS Base
Model: GN9300 / Ch.: 4, 2, 0 / ant.: 2
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 23°C / 120 V AC (AC/DC adaptor)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:3.850GHz Pmax:-41.89dBm RBW:10 kHz

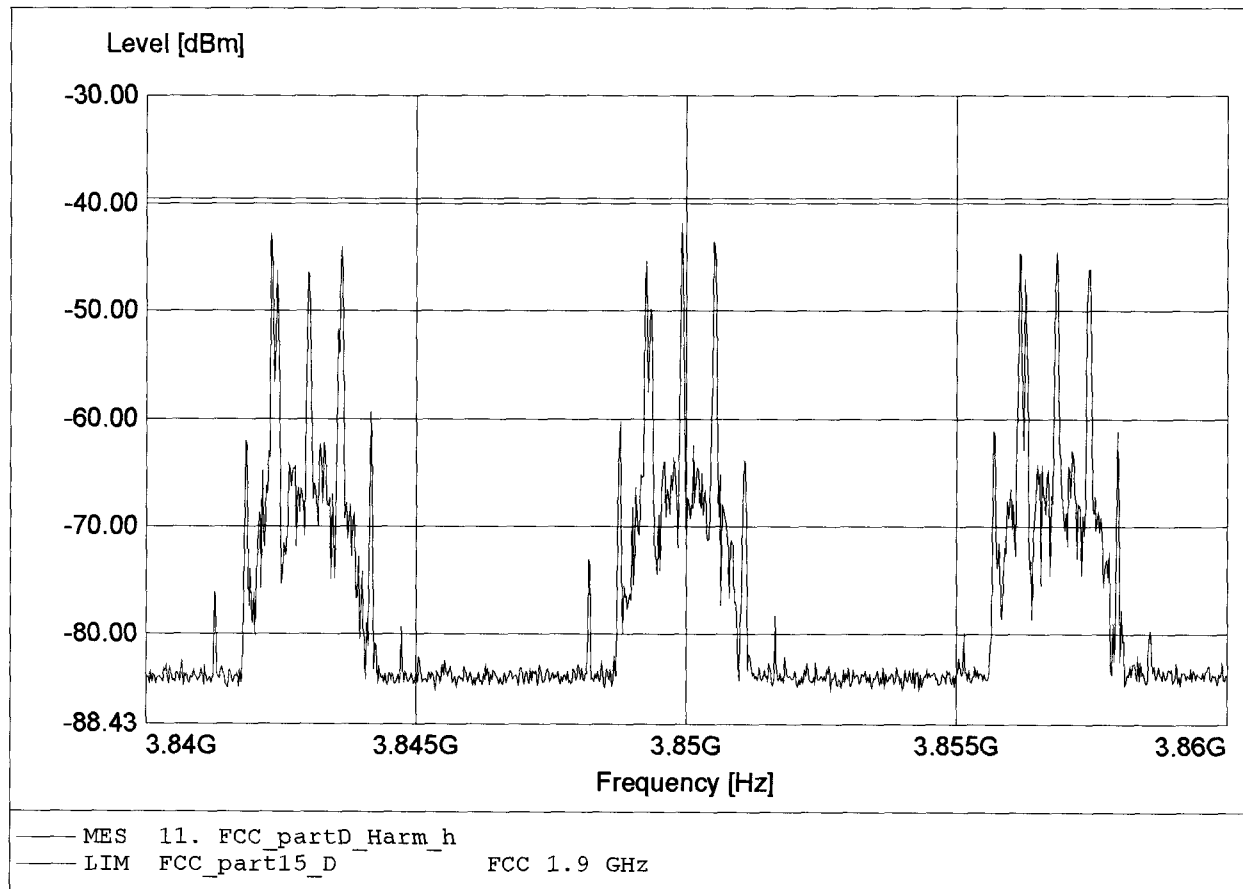

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)

Type approval holder: RTX Telecom A/S

EUT : GN9300 UPCS Base

Model: GN9300 / Ch.: 4, 2, 0 / ant.: 2


Test Site / Operator: ETS / Mr. Handrik

Temperature/ Voltage: 23°C / 120 V AC (AC/DC adaptor)

Test Specification: Fully anechoic chamber / mode: Tx

Comment 1: Dist.: 1m, Ant.: HL 025, ampl.


Comment 2: Freq:5.784GHz Pmax:-45.81dBm RBW:10 kHz

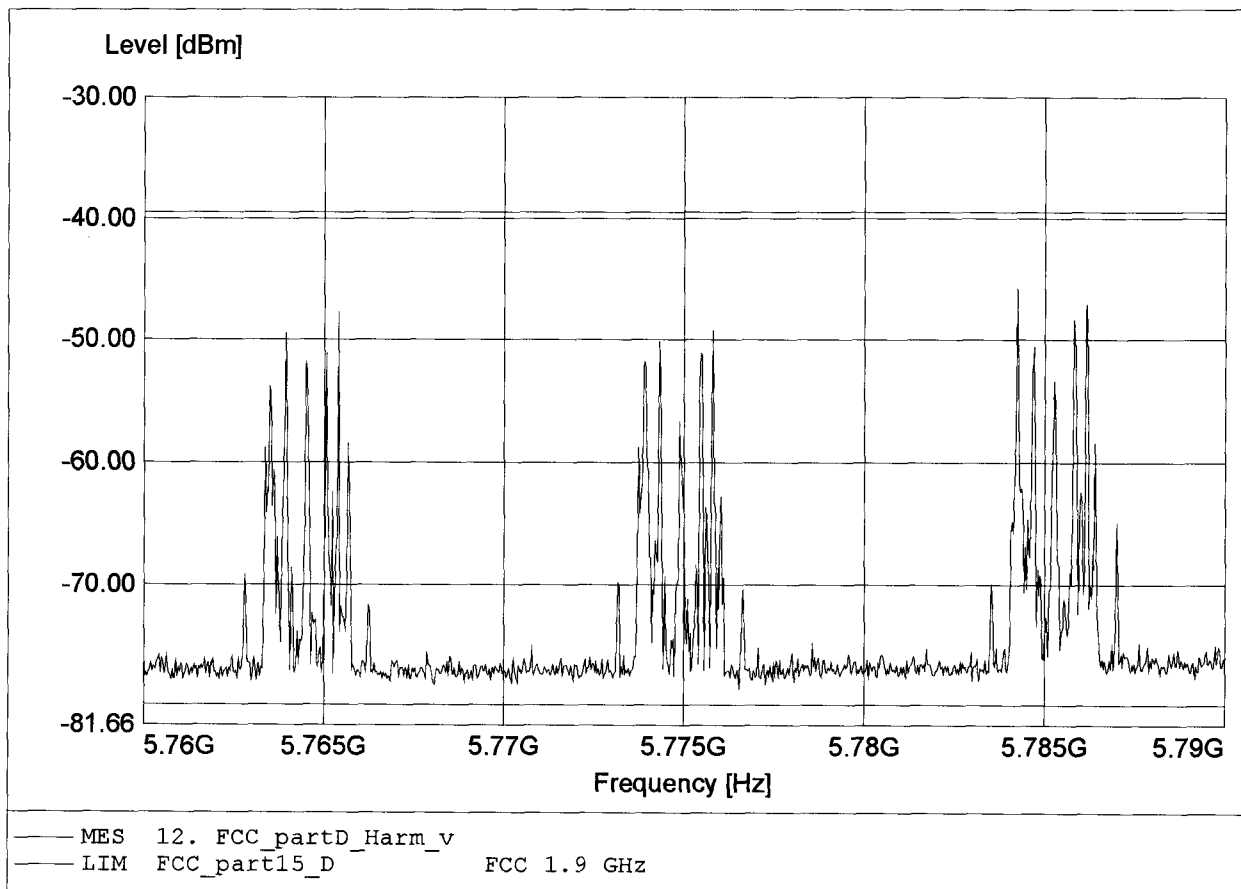

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Type approval holder: RTX Telecom A/S
EUT : GN9300 UPCS Base
Model: GN9300 / Ch.: 4, 2, 0 / ant.: 2
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 23°C / 120 V AC (AC/DC adaptor)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:5.765GHz Pmax:-50.77dBm RBW:10 kHz

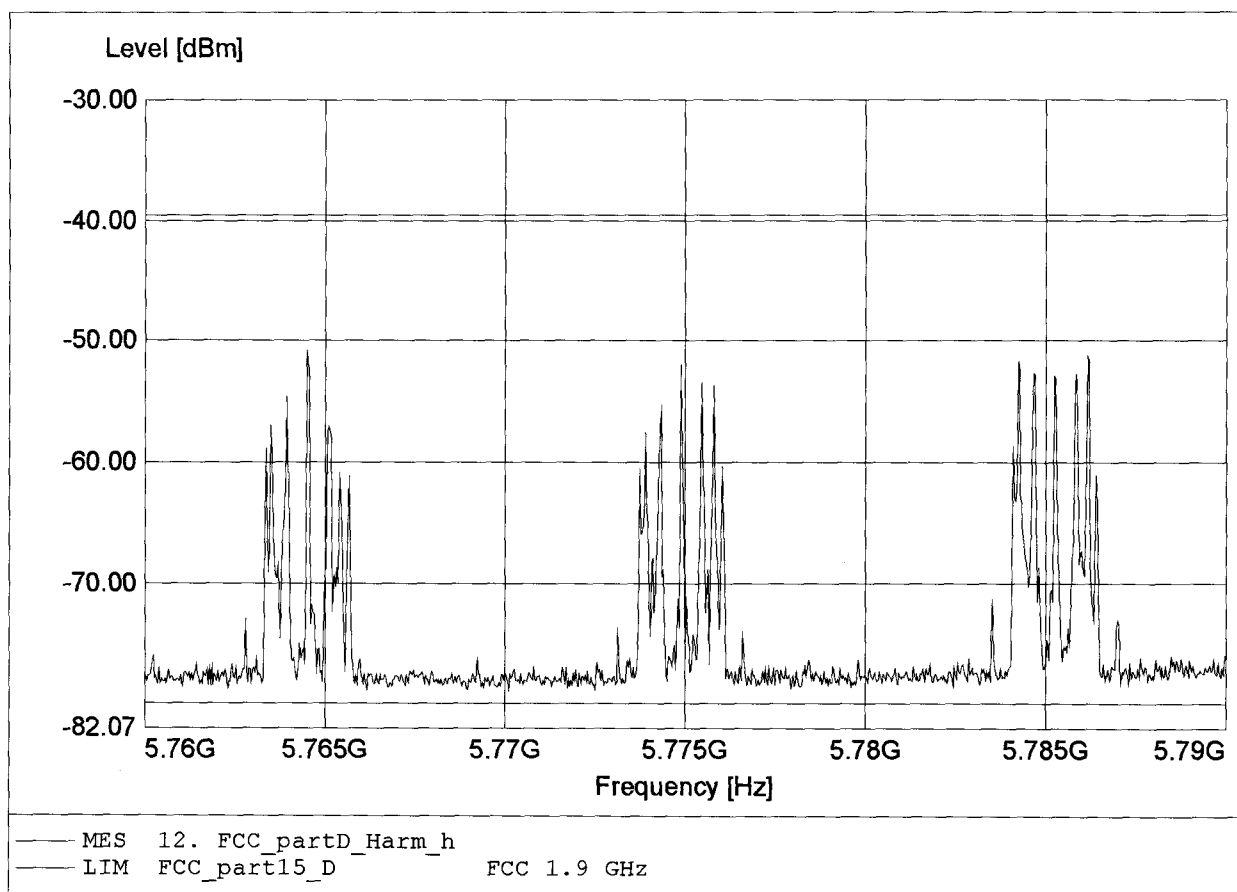

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Type approval holder: RTX Telecom A/S
EUT : GN9300 UPCS Base
Model: GN9300 / Ch.: 4, 2, 0 / ant.: 2
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 23°C / 120 V AC (AC/DC adaptor)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:7.701GHz Pmax:-52.17dBm RBW:10 kHz

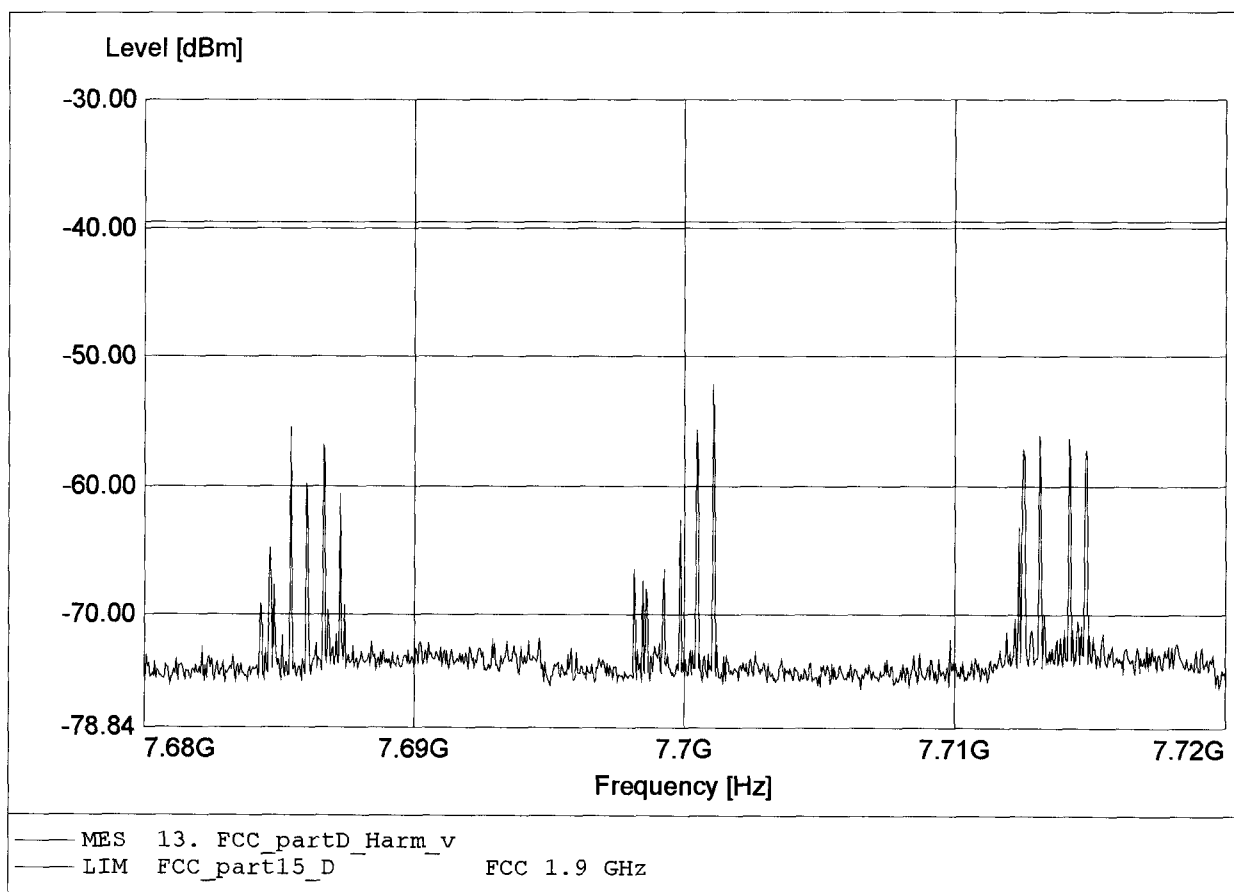

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)

Type approval holder: RTX Telecom A/S
EUT : GN9300 UPCS Base
Model: GN9300 / Ch.: 4, 2, 0 / ant.: 2
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 23°C / 120 V AC (AC/DC adaptor)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq: 7.712GHz Pmax: -48.29dBm RBW: 10 kHz

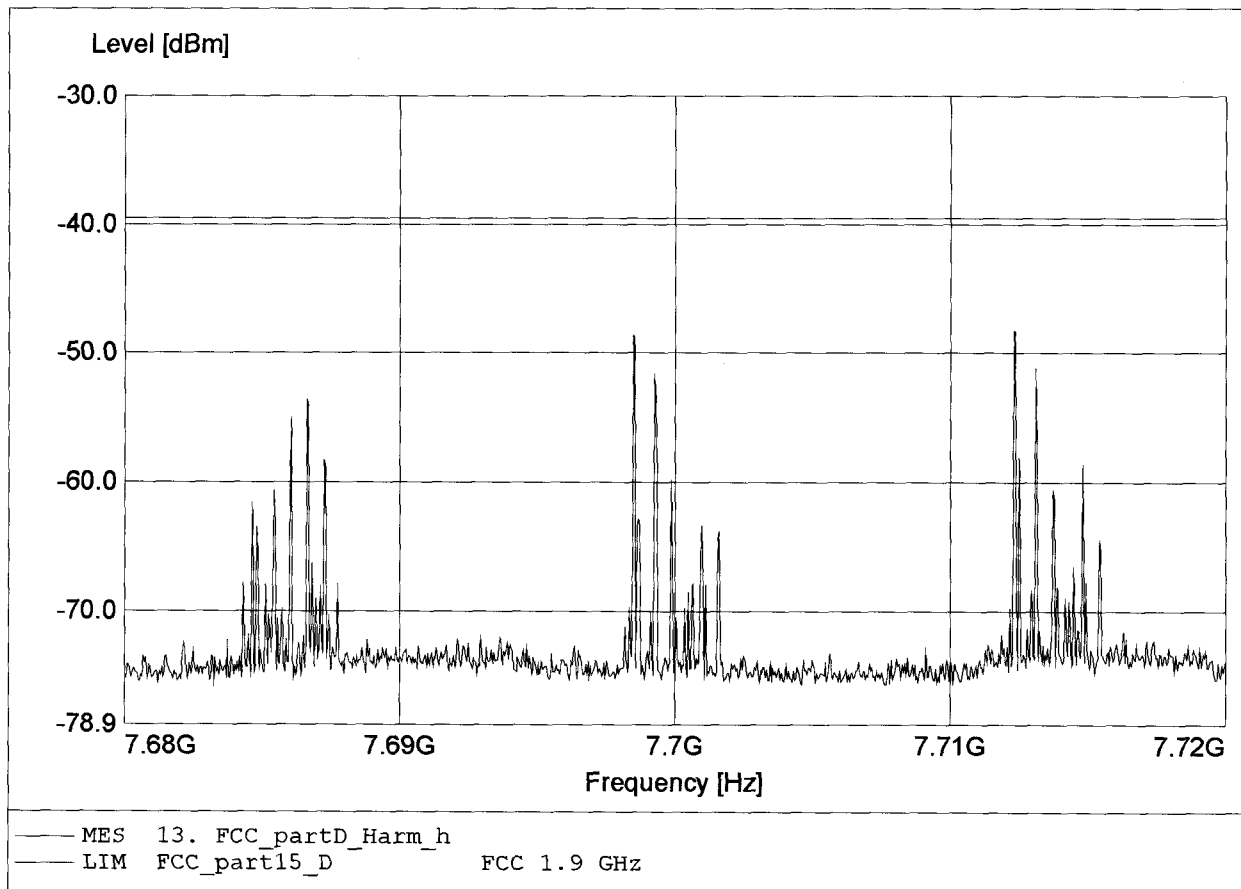

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)

Type approval holder: RTX Telecom A/S

EUT : GN9300 UPCS Base

Model: GN9300 / Ch.: 4, 2, 0 / ant.: 2


Test Site / Operator: ETS / Mr. Handrik

Temperature/ Voltage: 23°C / 120 V AC (AC/DC adaptor)

Test Specification: Fully anechoic chamber / mode: Tx

Comment 1: Dist.: 1m, Ant.: HL 025, ampl.


Comment 2: Freq:9.640GHz Pmax:-66.66dBm RBW:10 kHz

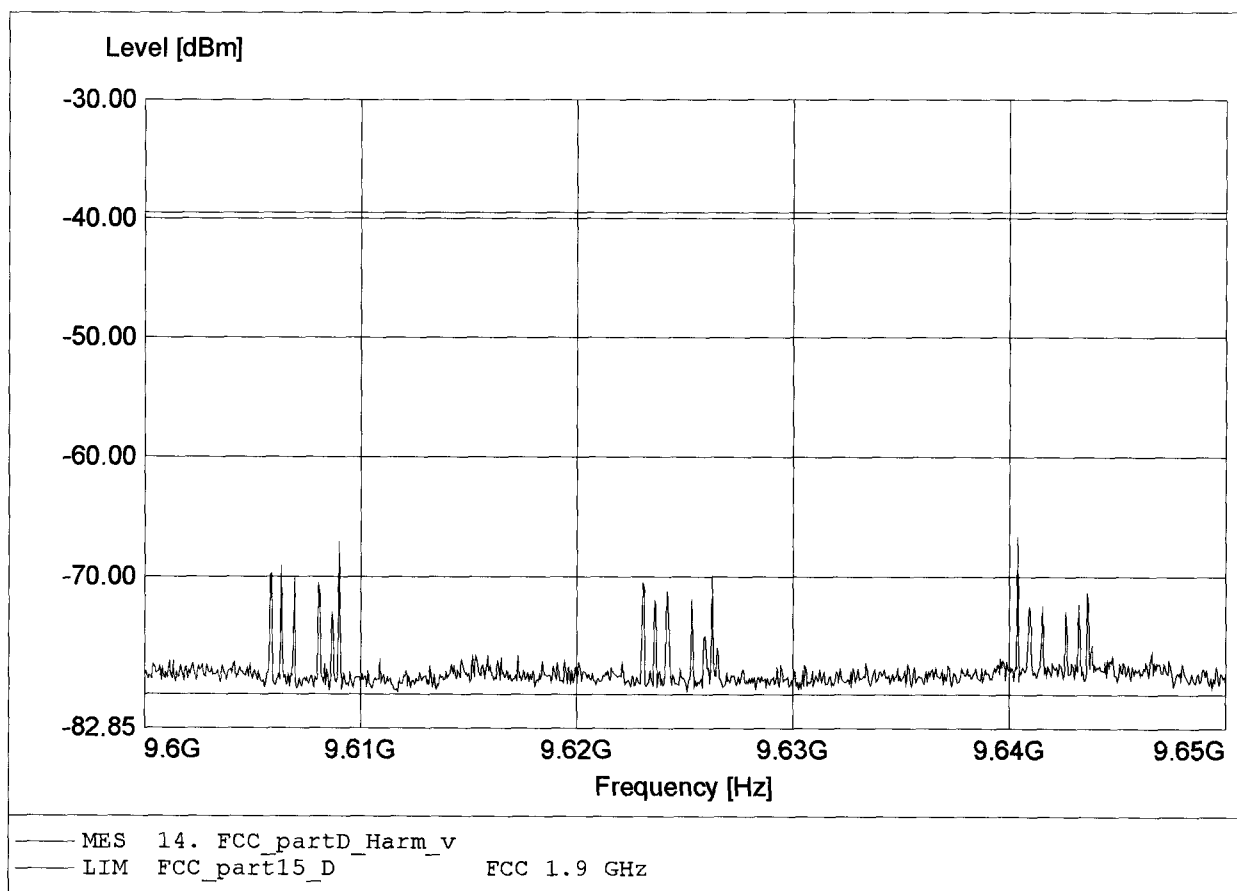

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Type approval holder: RTX Telecom A/S
EUT : GN9300 UPCS Base
Model: GN9300 / Ch.: 4, 2, 0 / ant.: 2
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 23°C / 120 V AC (AC/DC adaptor)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:9.623GHz Pmax:-69.19dBm RBW:10 kHz

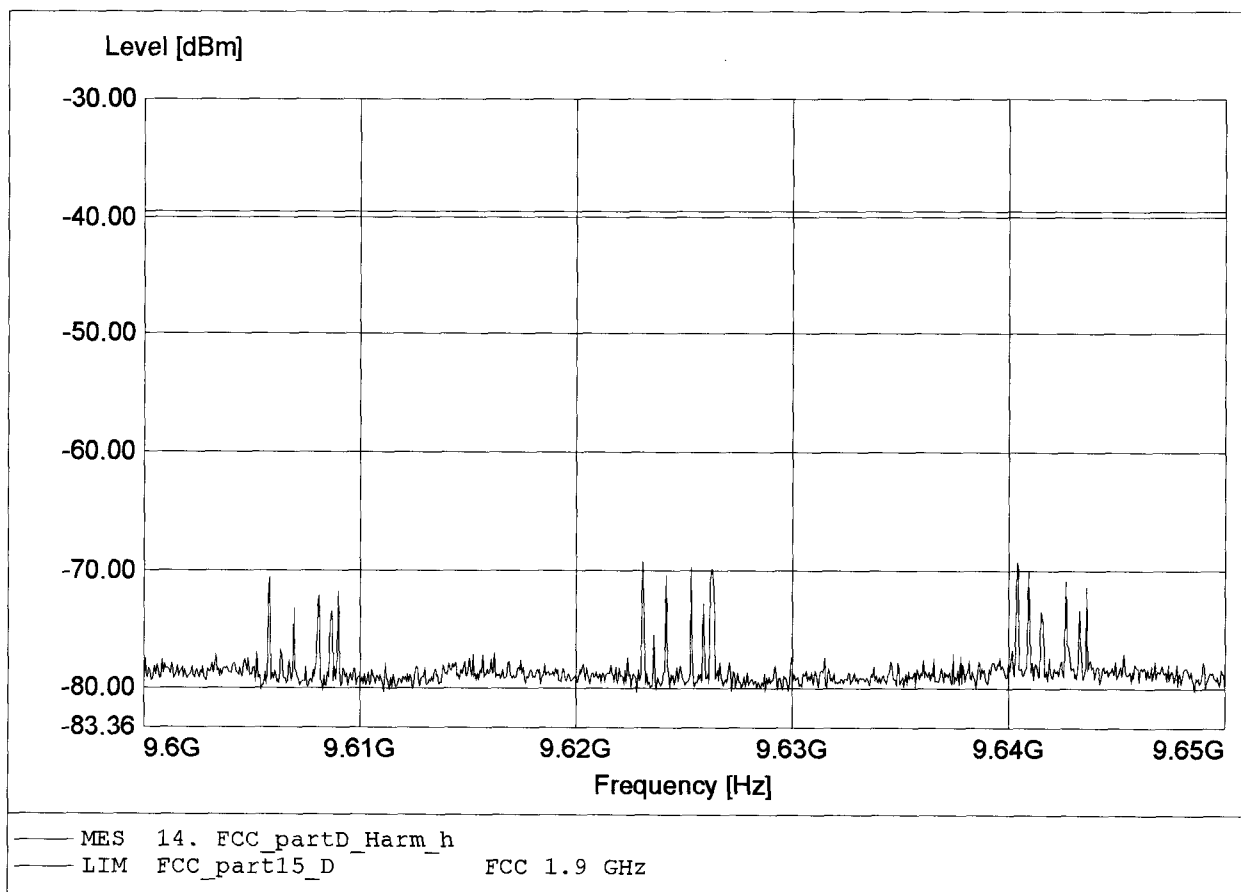

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Type approval holder: RTX Telecom A/S
EUT : GN9300 UPCS Base
Model: GN9300 / Ch.: 4, 2, 0 / ant.: 2
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 23°C / 120 V AC (AC/DC adaptor)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:11.569GHz Pmax:-64.12dBm RBW:10 kHz

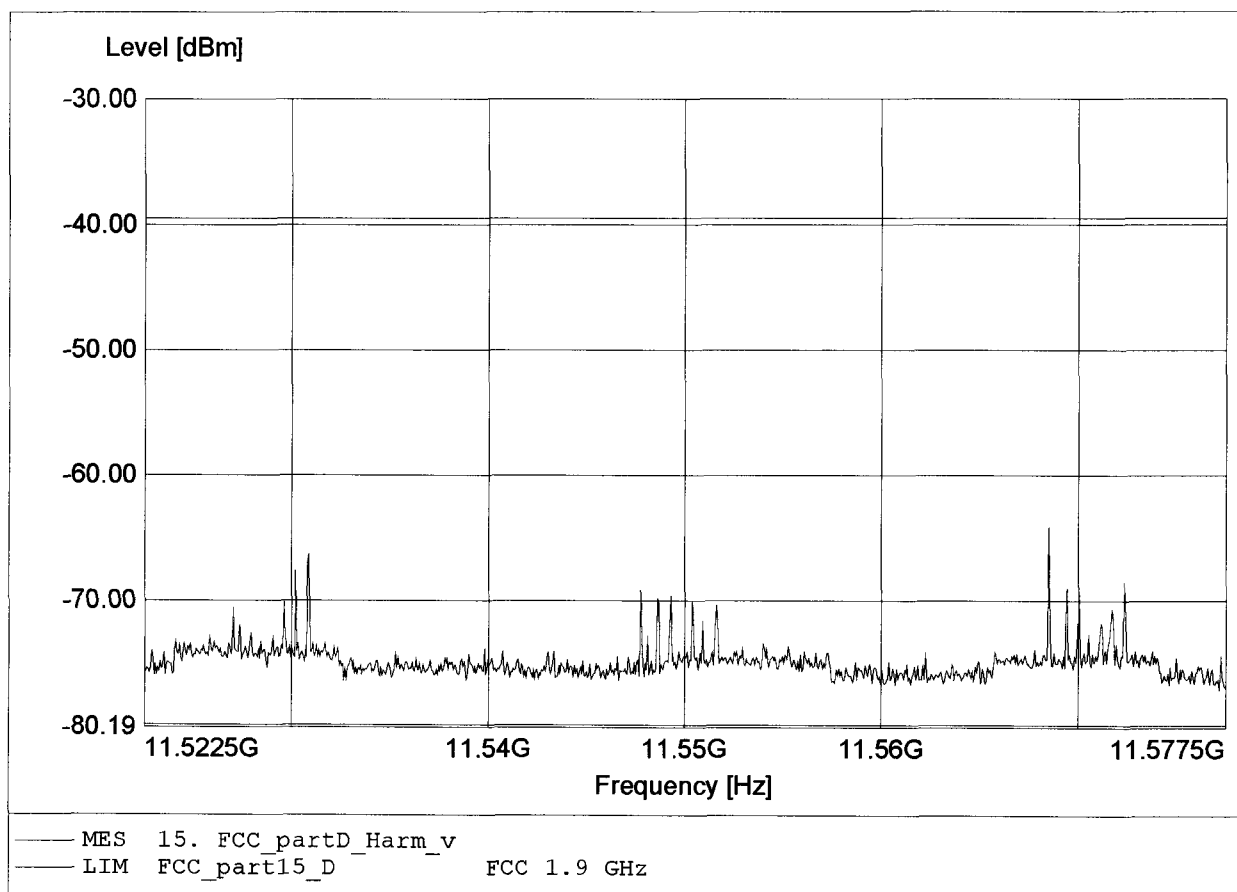

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)

Type approval holder: RTX Telecom A/S
EUT : GN9300 UPCS Base
Model: GN9300 / Ch.: 4, 2, 0 / ant.: 2
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 23°C / 120 V AC (AC/DC adaptor)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:11.552GHz Pmax:-63.16dBm RBW:10 kHz

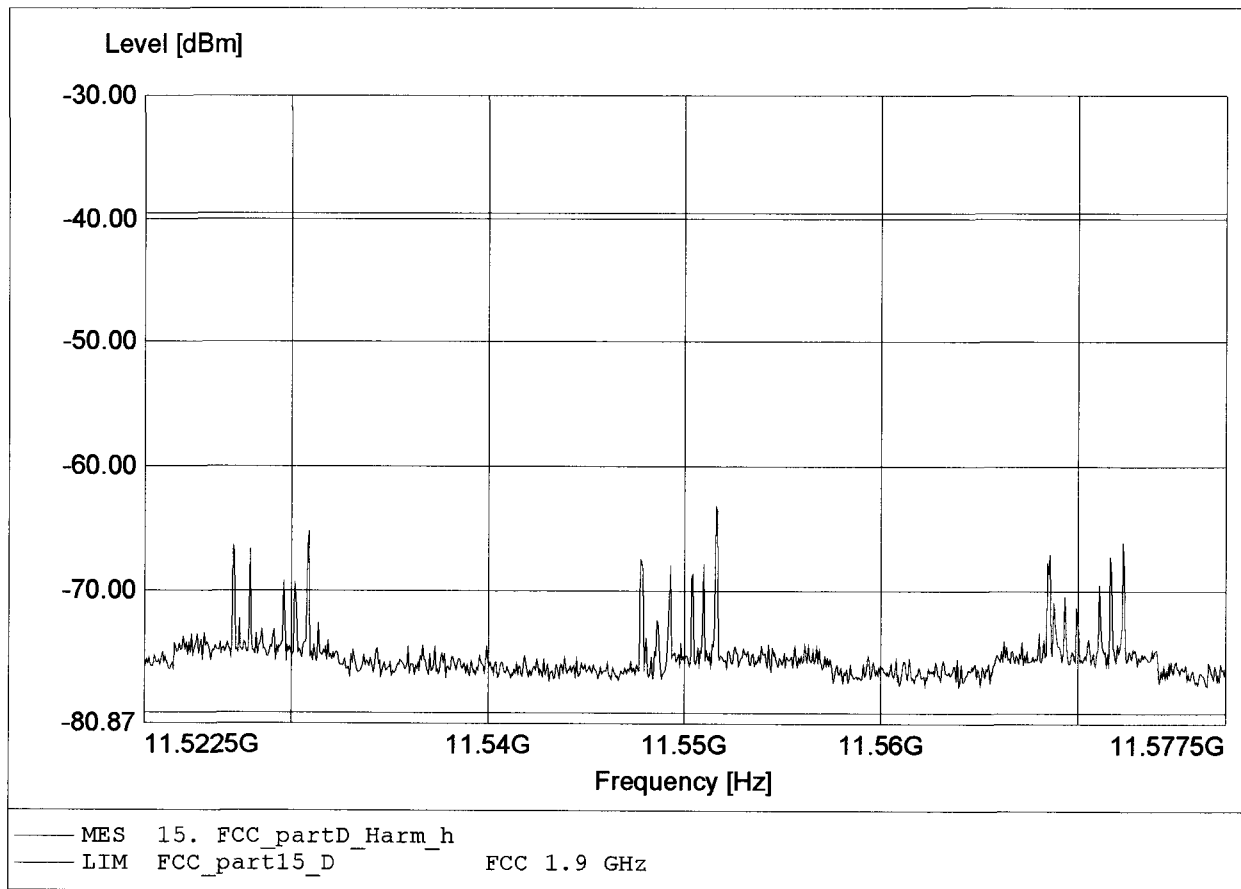

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)

Type approval holder: RTX Telecom A/S

EUT : GN9300 UPCS Base

Model: GN9300 / Ch.: 4, 2, 0 / ant.: 2


Test Site / Operator: ETS / Mr. Handrik

Temperature/ Voltage: 23°C / 120 V AC (AC/DC adaptor)

Test Specification: Fully anechoic chamber / mode: Tx

Comment 1: Dist.: 1m, Ant.: HL 025, ampl.


Comment 2: Freq:13.462GHz Pmax:-72.85dBm RBW:10 kHz

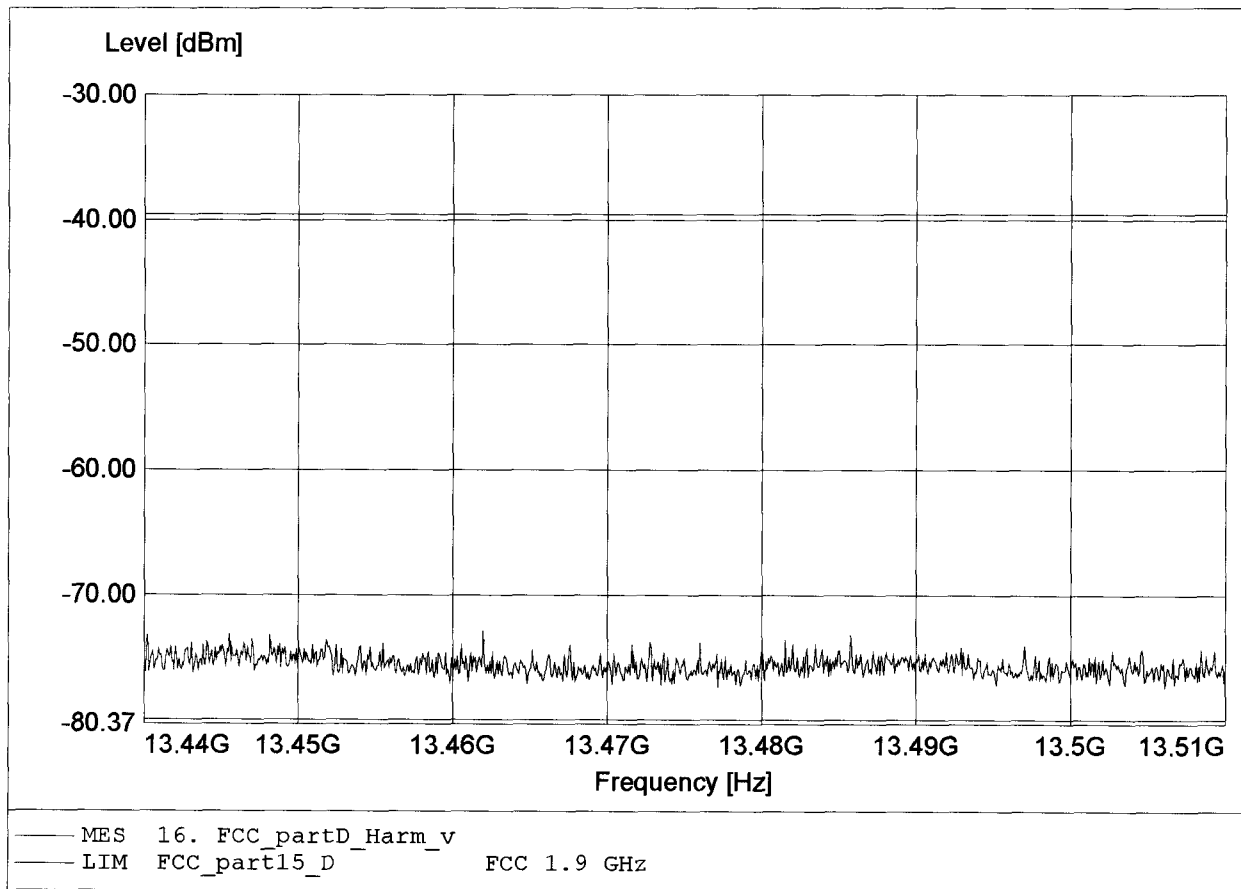

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Type approval holder: RTX Telecom A/S
EUT : GN9300 UPCS Base
Model: GN9300 / Ch.: 4, 2, 0 / ant.: 2
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 23°C / 120 V AC (AC/DC adaptor)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:13.442GHz Pmax:-73.29dBm RBW:10 kHz

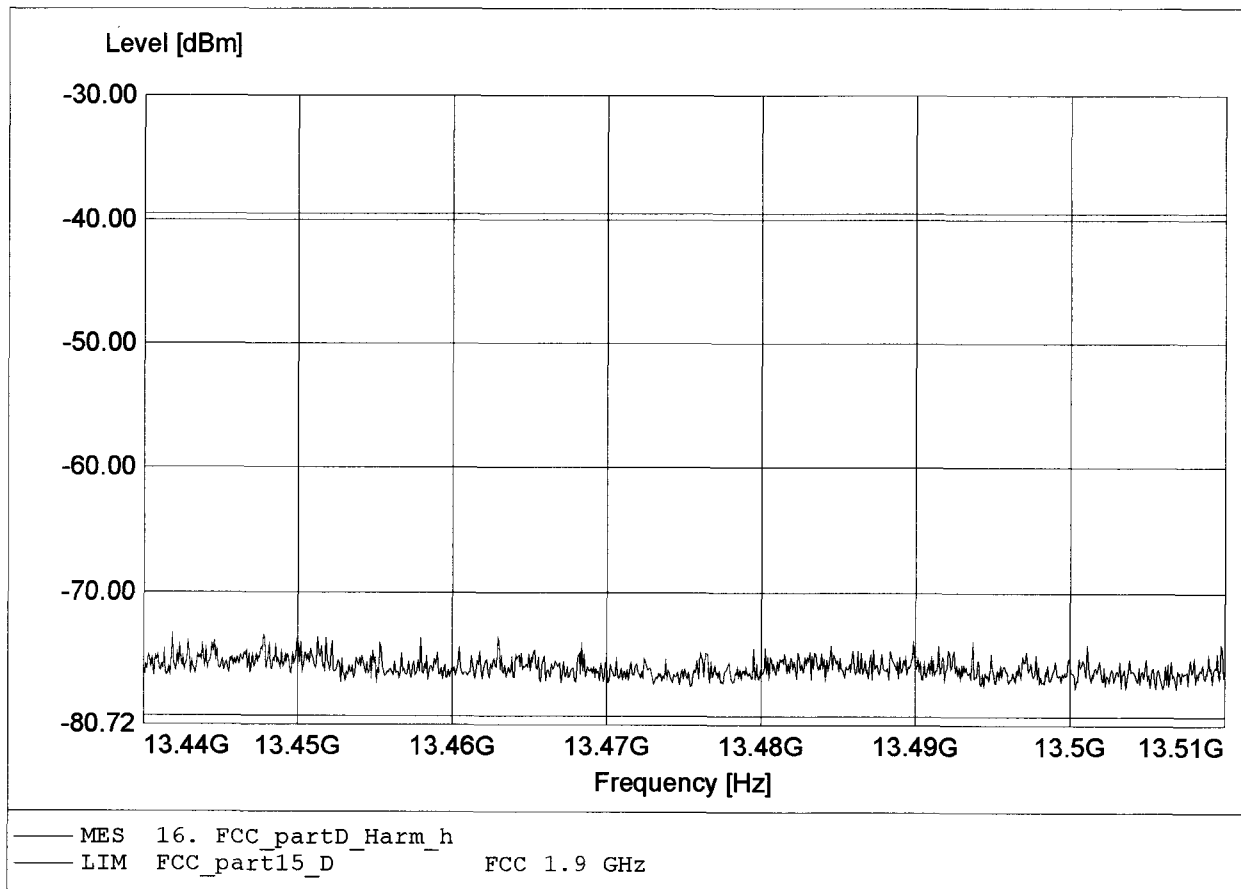

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)

Type approval holder: RTX Telecom A/S
EUT : GN9300 UPCS Base
Model: GN9300 / Ch.: 4, 2, 0 / ant.: 2
Test Site / Operator: ETS / Mr. Cersovsky
Temperature/ Voltage: 23°C / 120 V AC (AC/DC adaptor)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:15.397GHz Pmax:-63.18dBm RBW:10 kHz

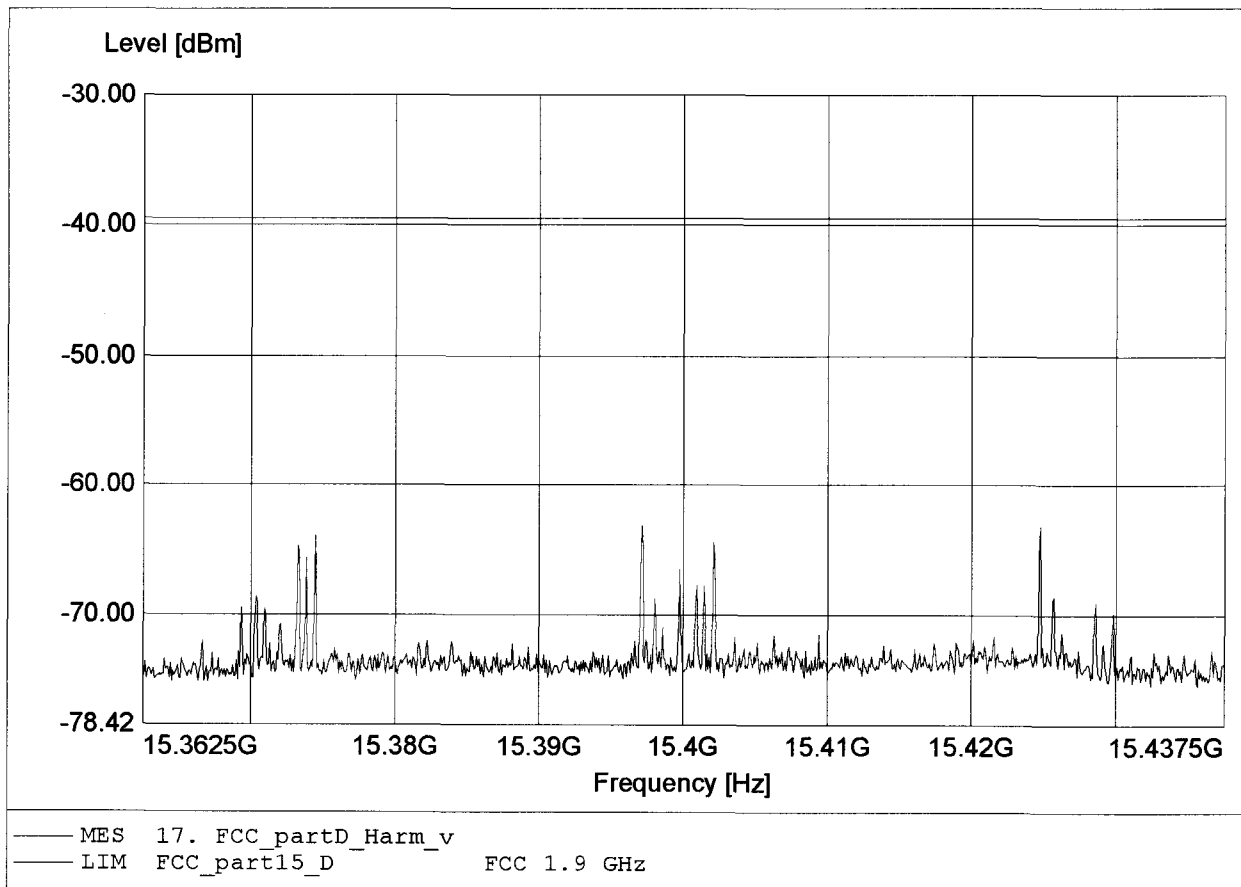

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)

Type approval holder: RTX Telecom A/S

EUT : GN9300 UPCS Base

Model: GN9300 / Ch.: 4, 2, 0 / ant.: 2


Test Site / Operator: ETS / Mr. Handrik

Temperature/ Voltage: 23°C / 120 V AC (AC/DC adaptor)

Test Specification: Fully anechoic chamber / mode: Tx

Comment 1: Dist.: 1m, Ant.: HL 025, ampl.


Comment 2: Freq:15.402GHz Pmax:-61.25dBm RBW:10 kHz

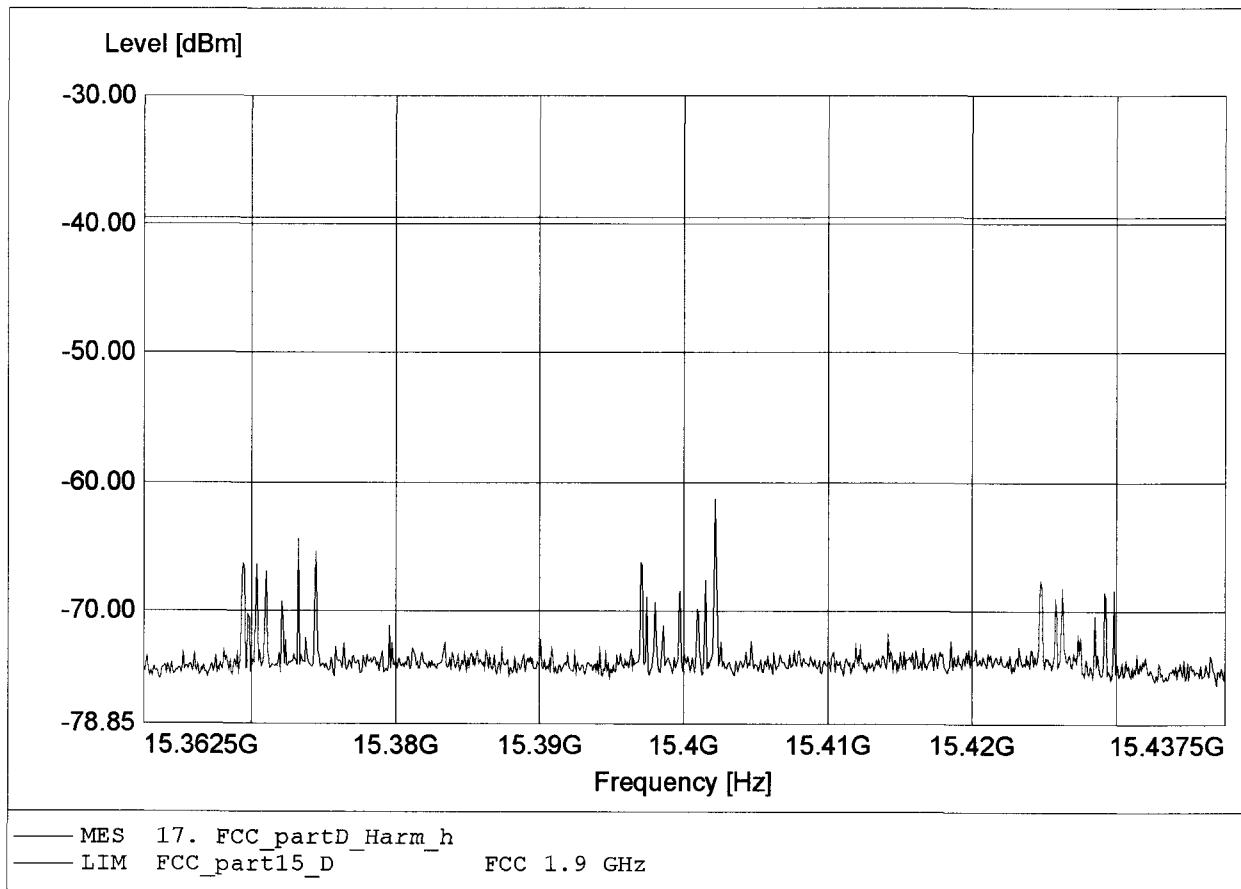

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Type approval holder: RTX Telecom A/S
EUT : GN9300 UPCS Base
Model: GN9300 / Ch.: 4, 2, 0 / ant.: 2
Test Site / Operator: ETS / Mr. Cersovsky
Temperature/ Voltage: 23°C / 120 V AC (AC/DC adaptor)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:17.322GHz Pmax:-67.11dBm RBW:10 kHz

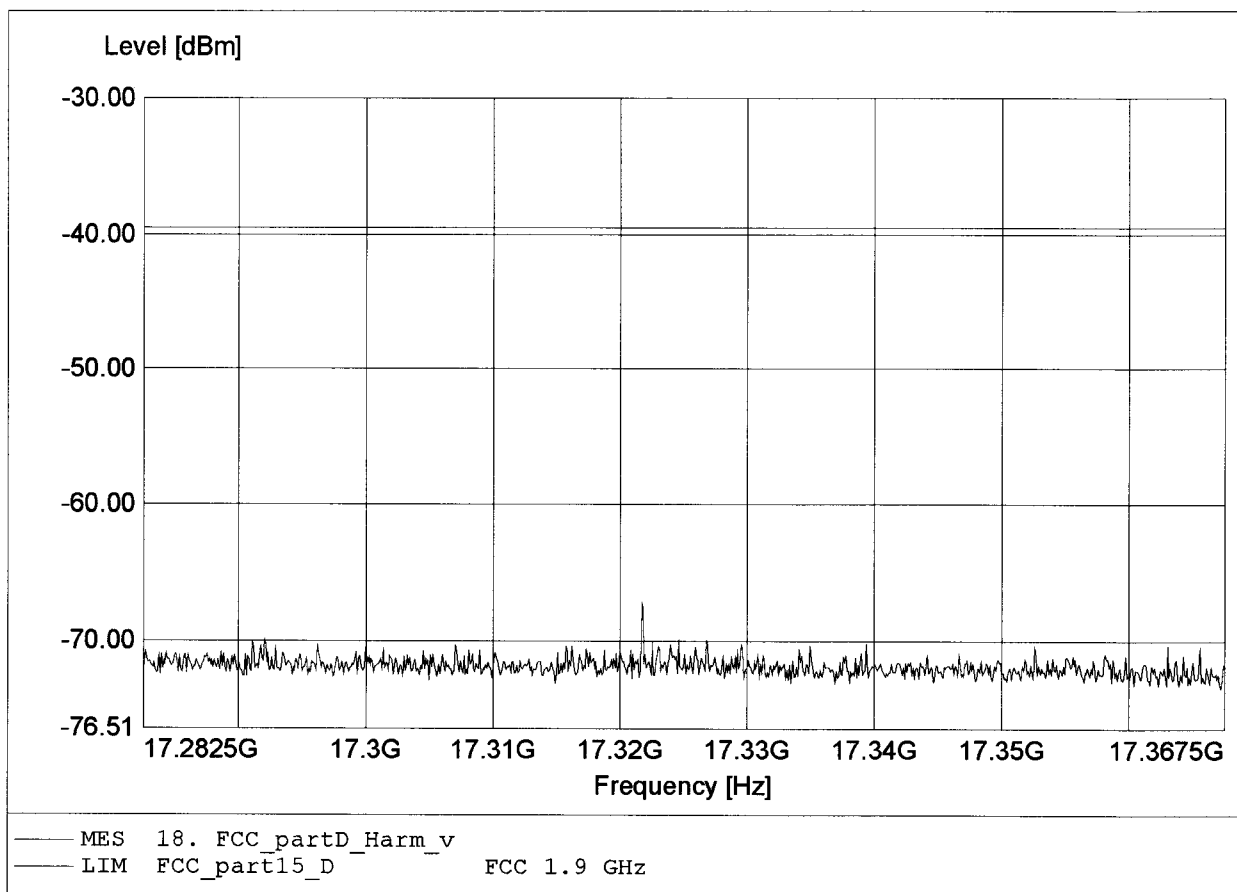

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Type approval holder: RTX Telecom A/S
EUT : GN9300 UPCS Base
Model: GN9300 / Ch.: 4, 2, 0 / ant.: 2
Test Site / Operator: ETS / Mr. Handrik
Temperature/ Voltage: 23°C / 120 V AC (AC/DC adaptor)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:17.291GHz Pmax:-68.78dBm RBW:10 kHz

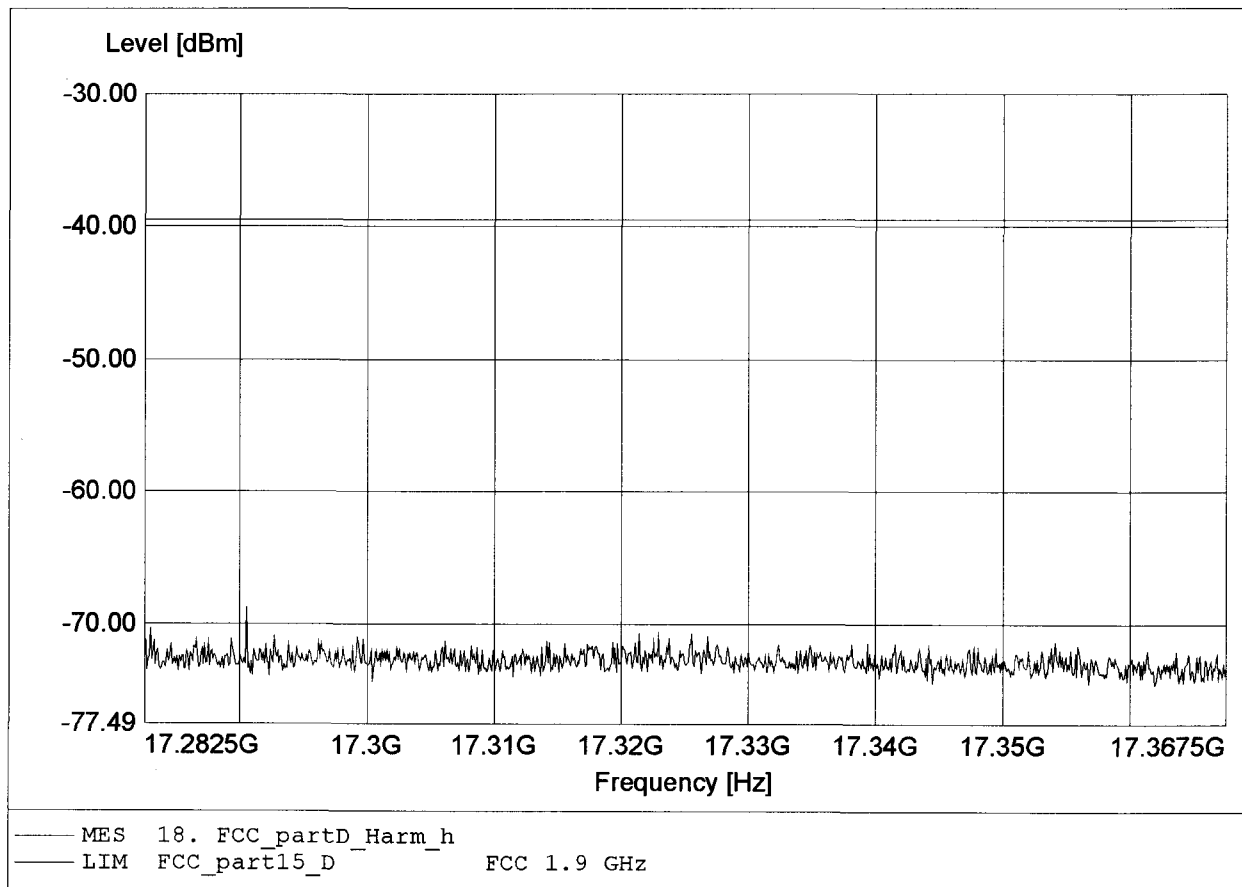

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Type approval holder: RTX Telecom A/S
EUT : GN9300 UPCS Base
Model: GN9300 / Ch.: 4, 2, 0 / ant.: 2
Test Site / Operator: ETS / Mr. Cersovsky
Temperature/ Voltage: 23°C / 120 V AC (AC/DC adaptor)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:19.258GHz Pmax:-65.55dBm RBW:10 kHz

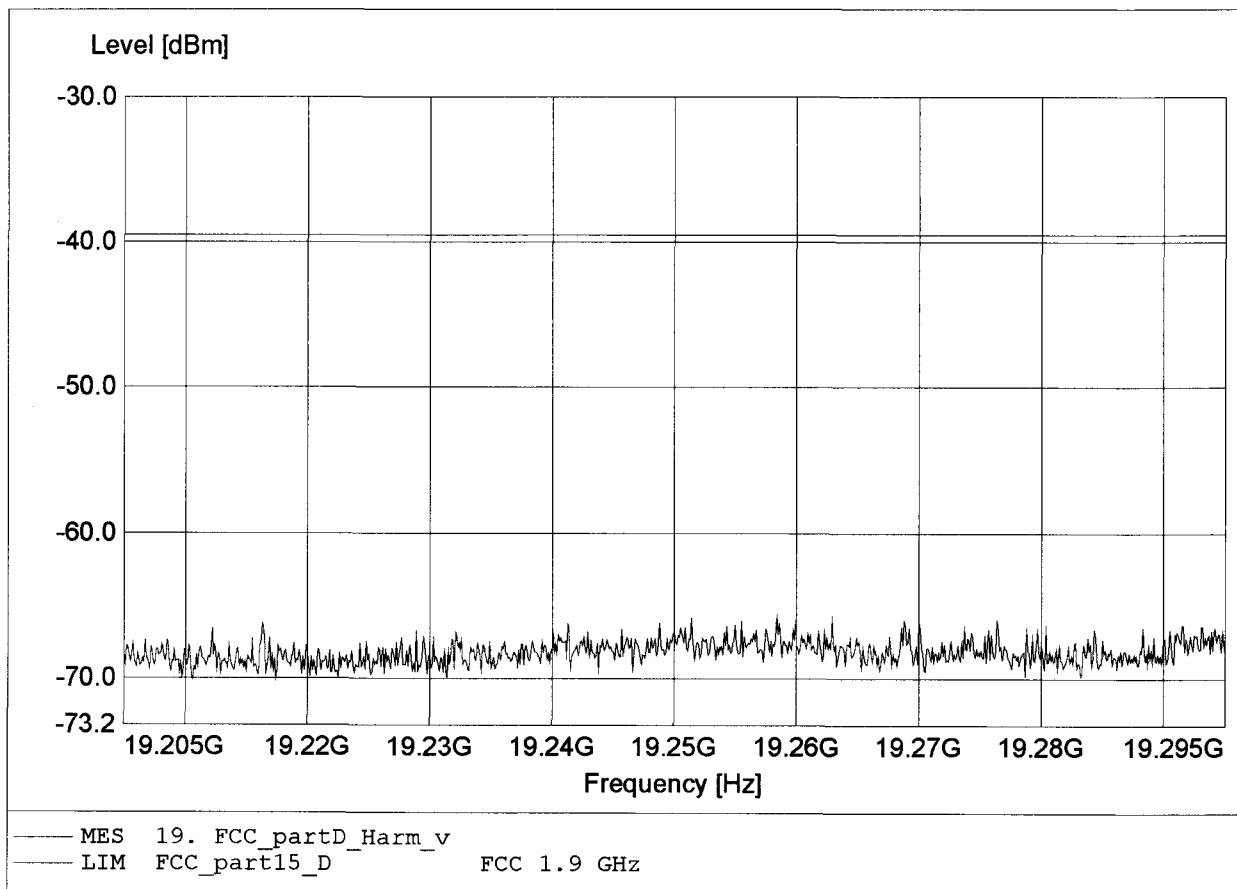

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Type approval holder: RTX Telecom A/S
EUT : GN9300 UPCS Base
Model: GN9300 / Ch.: 4, 2, 0 / ant.: 2
Test Site / Operator: ETS / Mr. Cersovsky
Temperature/ Voltage: 23°C / 120 V AC (AC/DC adaptor)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:19.295GHz Pmax:-65.60dBm RBW:10 kHz

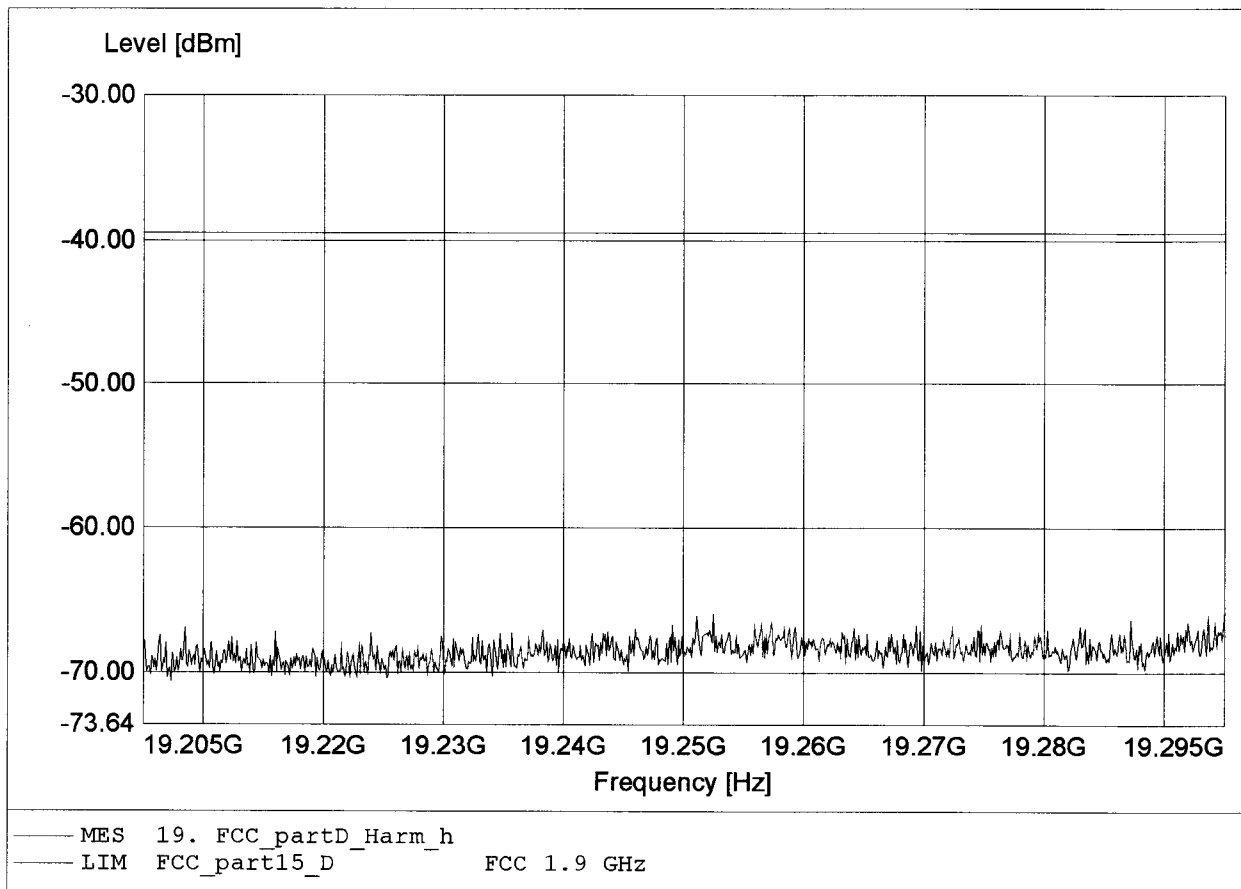

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Type approval holder: RTX Telecom A/S
EUT : GN9300 UPCS Base (CT)
Model: GN9300 / Ch.: 2 / antenna 2
Test Site / Operator: ETS / Mr. Cersovsky
Temperature/ Voltage: 23°C / 120 V AC (AC/DC adaptor)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HK 116,
Comment 2: Freq:176.389MHz Pmax:-55.07dBm RBW: 100 kHz

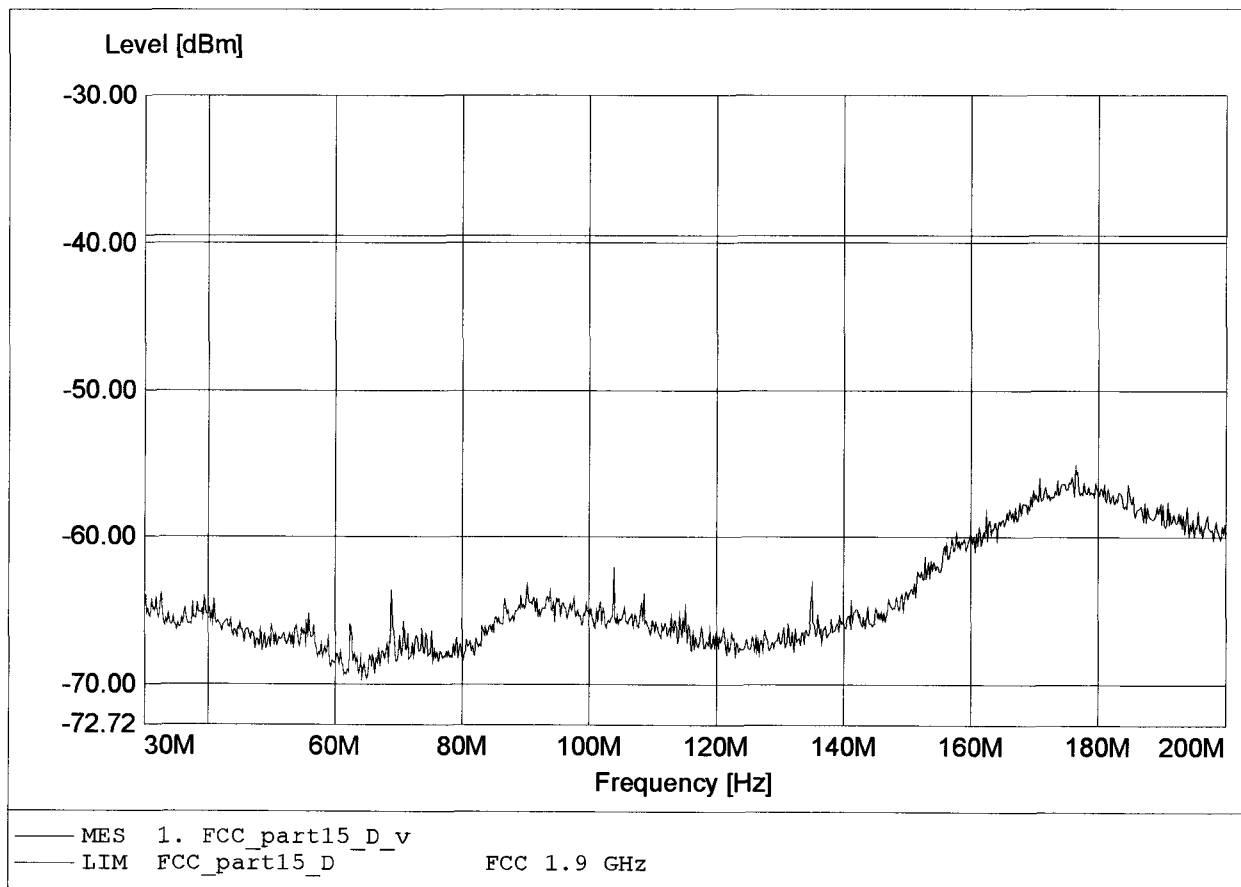

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Type approval holder: RTX Telecom A/S
EUT : GN9300 UPCS Base (CT)
Model: GN9300 / Ch.: 2 / antenna 2
Test Site / Operator: ETS / Mr. Cersovsky
Temperature/ Voltage: 23°C / 120 V AC (AC/DC adaptor)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HK 116,
Comment 2: Freq:190.744MHz Pmax:-60.86dBm RBW: 100 kHz

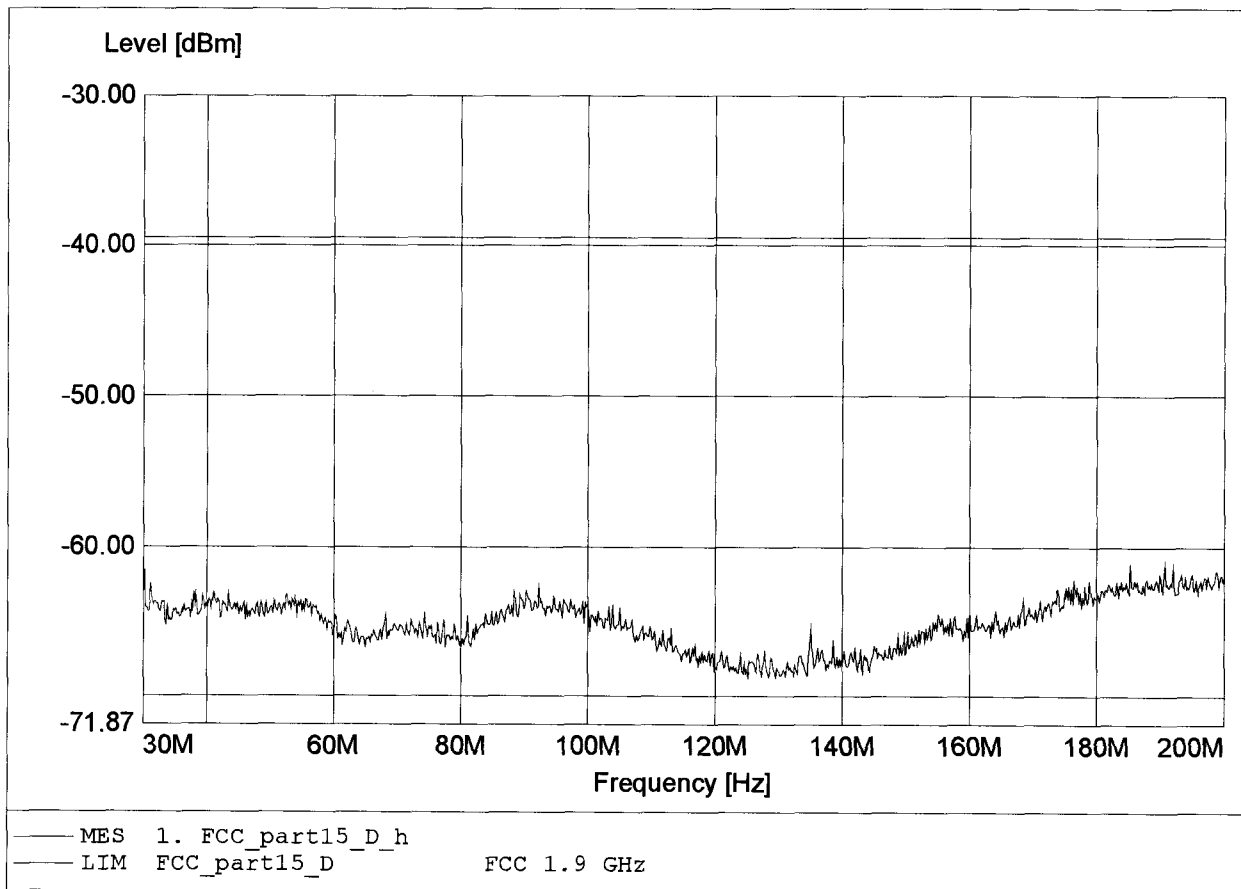

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Type approval holder: RTX Telecom A/S
EUT : GN9300 UPCS Base (CT)
Model: GN9300 / Ch.: 2 / antenna 2
Test Site / Operator: ETS / Mr. Cersovsky
Temperature/ Voltage: 23°C / 120 V AC (AC/DC adaptor)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
Comment 2: Freq:622.222MHz Pmax:-55.86dBm RBW: 100 kHz

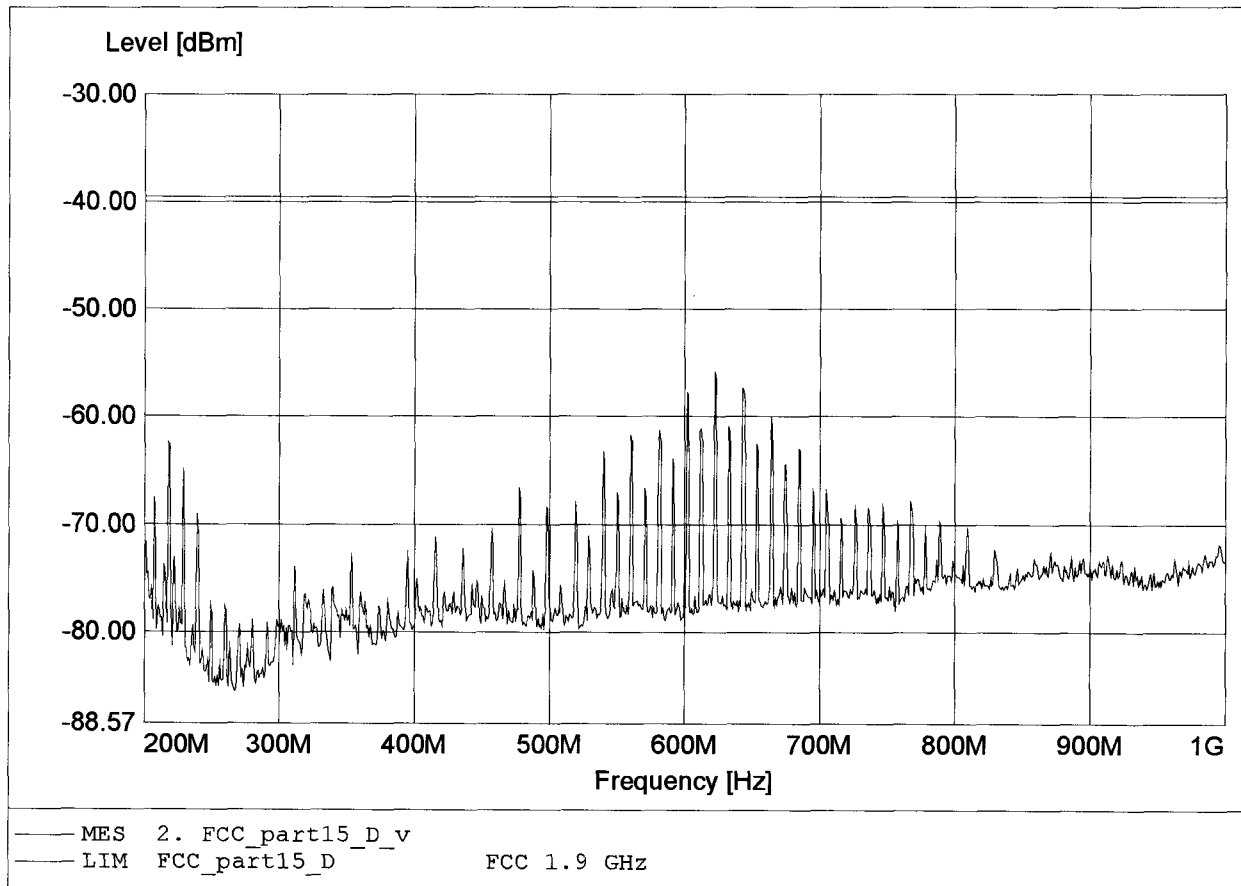

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Type approval holder: RTX Telecom A/S
EUT : GN9300 UPCS Base (CT)
Model: GN9300 / Ch.: 2 / antenna 2
Test Site / Operator: ETS / Mr. Cersovsky
Temperature/ Voltage: 23°C / 120 V AC (AC/DC adaptor)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
Comment 2: Freq: 622.222MHz Pmax: -57.43dBm RBW: 100 kHz

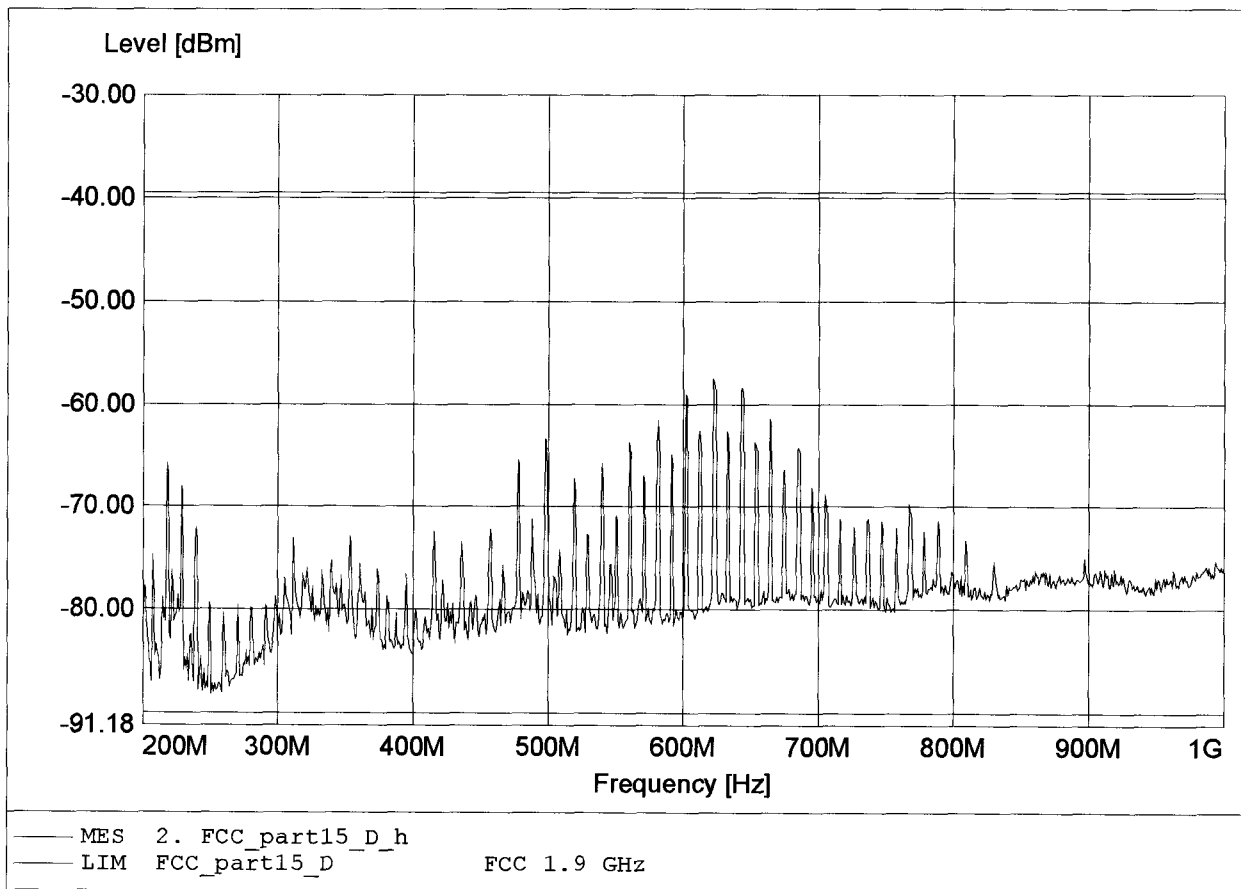

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Type approval holder: RTX Telecom A/S
EUT : GN9300 UPCS Base (CT)
Model: GN9300 / Ch.: 2 / antenna 2
Test Site / Operator: ETS / Mr. Cersovsky
Temperature/ Voltage: 23°C / 120 V AC (AC/DC adaptor)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:1.847GHz Pmax:-66.46dBm RBW: 100 kHz

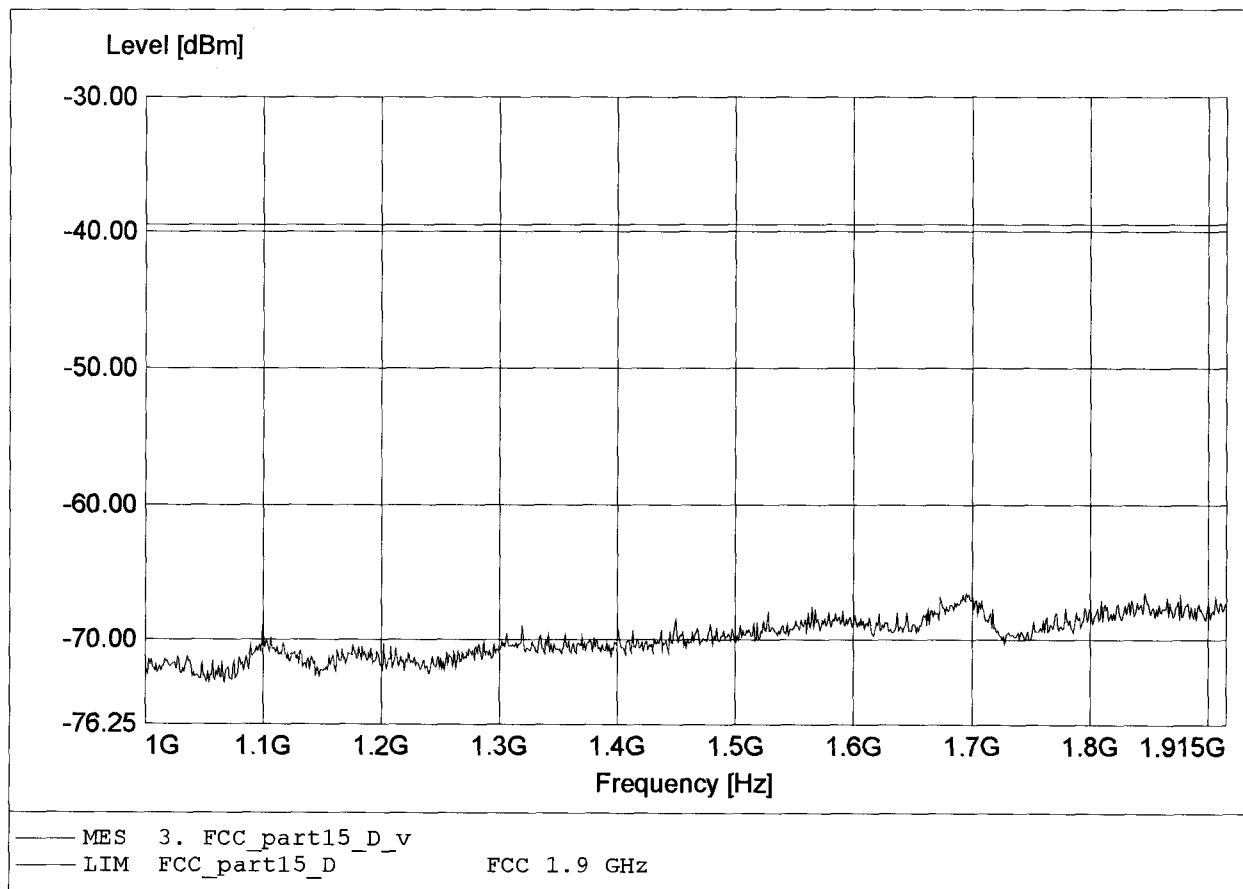

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D

Type approval holder: RTX Telecom A/S
EUT : GN9300 UPCS Base (CT)
Model: GN9300 / Ch.: 2 / antenna 2
Test Site / Operator: ETS / Mr. Cersovsky
Temperature/ Voltage: 23°C / 120 V AC (AC/DC adaptor)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:1.703GHz Pmax:-66.31dBm RBW: 100 kHz

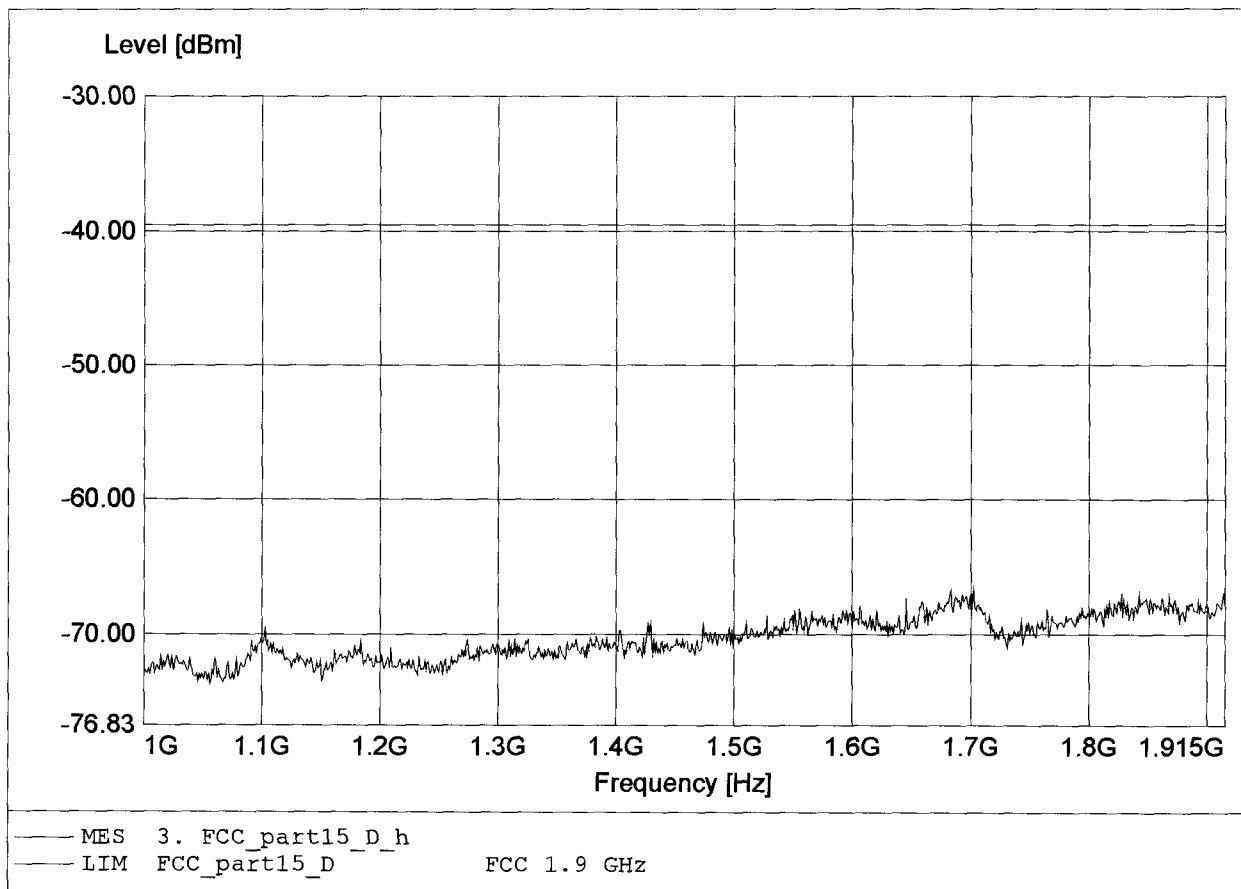

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)

Type approval holder: RTX Telecom A/S

EUT : GN9300 UPCS Base (CT)

Model: GN9300 / Ch.: 2 / antenna 2


Test Site / Operator: ETS / Mr. Cersovsky

Temperature/ Voltage: 23°C / 120 V AC (AC/DC adaptor)

Test Specification: Fully anechoic chamber / mode: Tx

Comment 1: Dist.: 1m, Ant.: HL 025, ampl.


Comment 2: Freq:1.920GHz Pmax:-73.37dBm RBW: 10 kHz

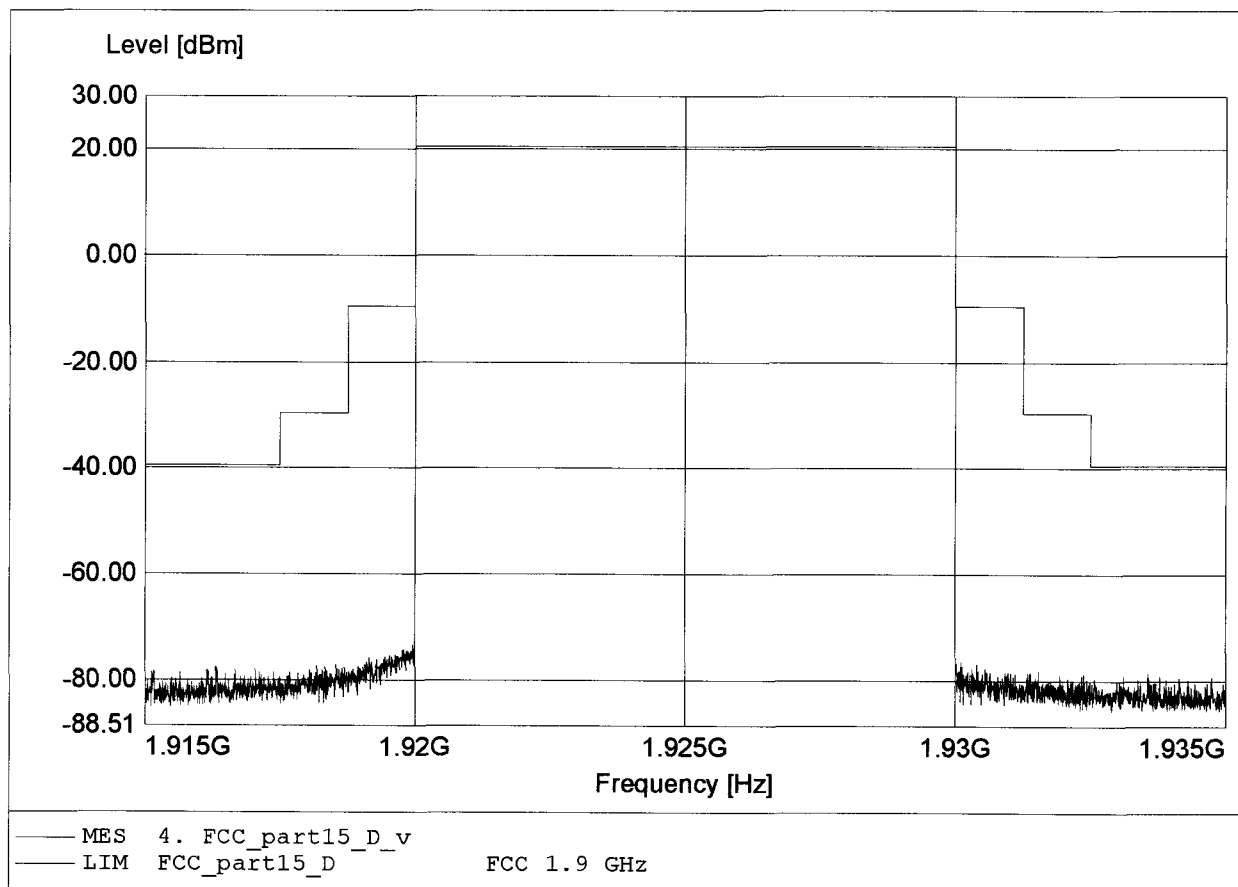

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Type approval holder: RTX Telecom A/S
EUT : GN9300 UPCS Base (CT)
Model: GN9300 / Ch.: 2 / antenna 2
Test Site / Operator: ETS / Mr. Cersovsky
Temperature/ Voltage: 23°C / 120 V AC (AC/DC adaptor)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:1.920GHz Pmax:-74.12dBm RBW: 10 kHz

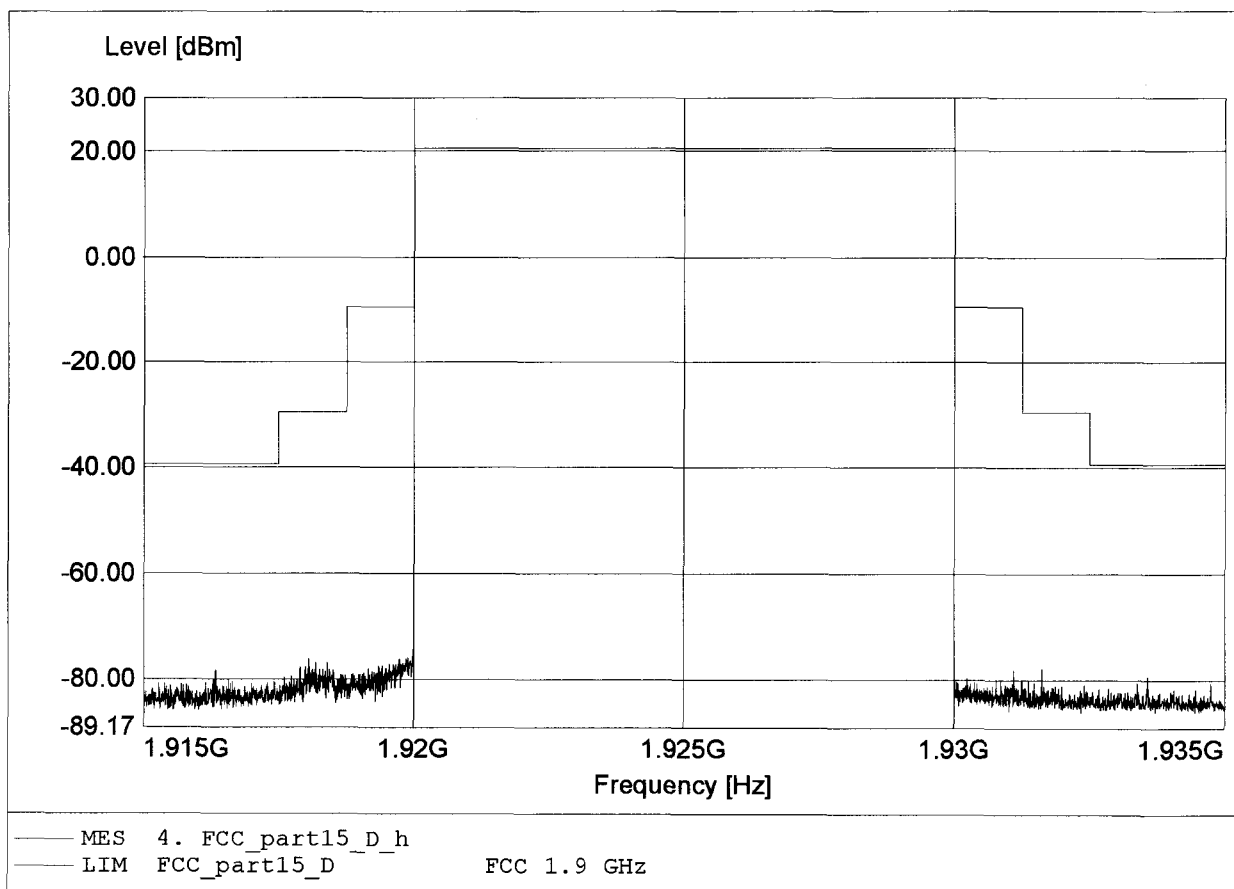

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Type approval holder: RTX Telecom A/S
EUT : GN9300 UPCS Base (CT)
Model: GN9300 / Ch.: 2 / antenna 2
Test Site / Operator: ETS / Mr. Cersovsky
Temperature/ Voltage: 23°C / 120 V AC (AC/DC adaptor)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq: 3.851GHz Pmax: -48.13dBm RBW: 100 kHz

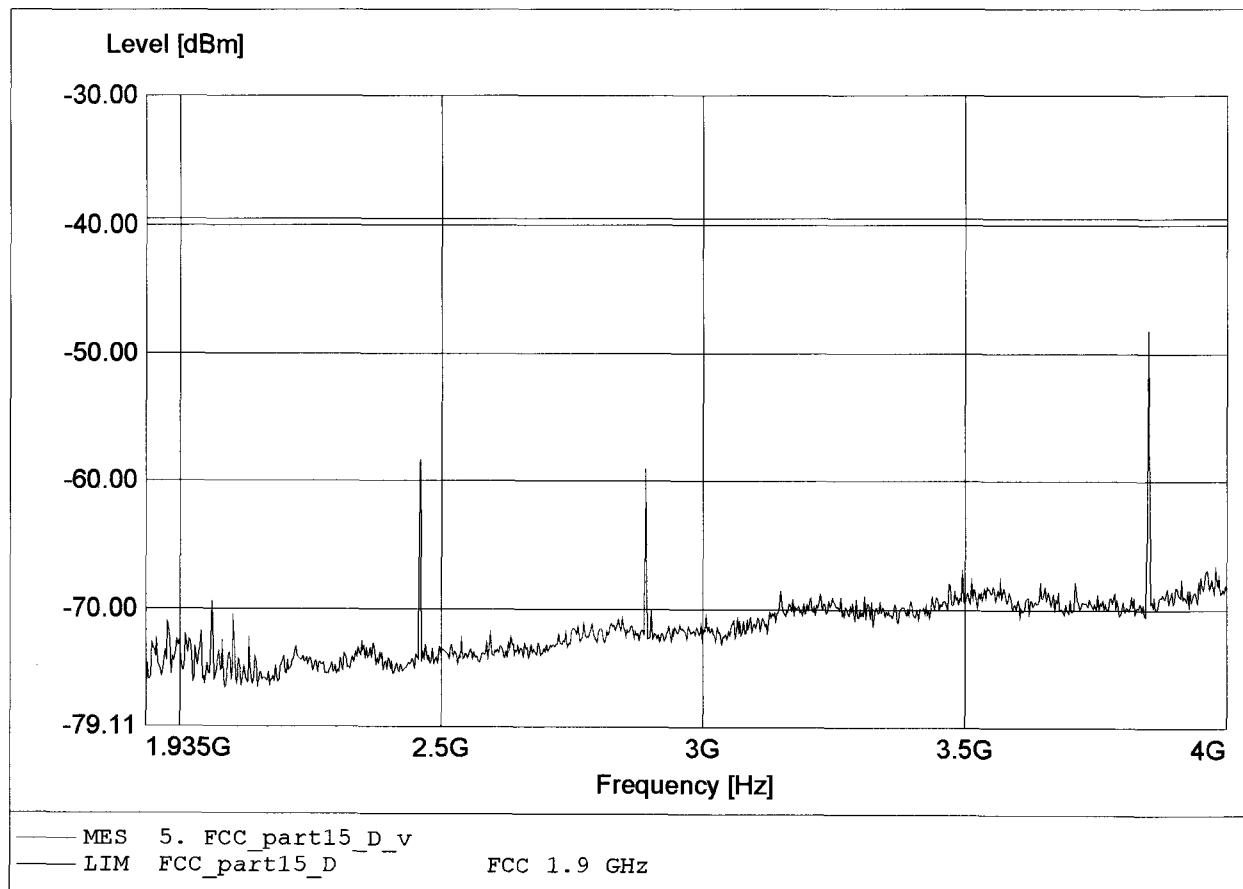

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Type approval holder: RTX Telecom A/S
EUT : GN9300 UPCS Base (CT)
Model: GN9300 / Ch.: 2 / antenna 2
Test Site / Operator: ETS / Mr. Cersovsky
Temperature/ Voltage: 23°C / 120 V AC (AC/DC adaptor)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq: 3.851GHz Pmax: -47.99dBm RBW: 100 kHz

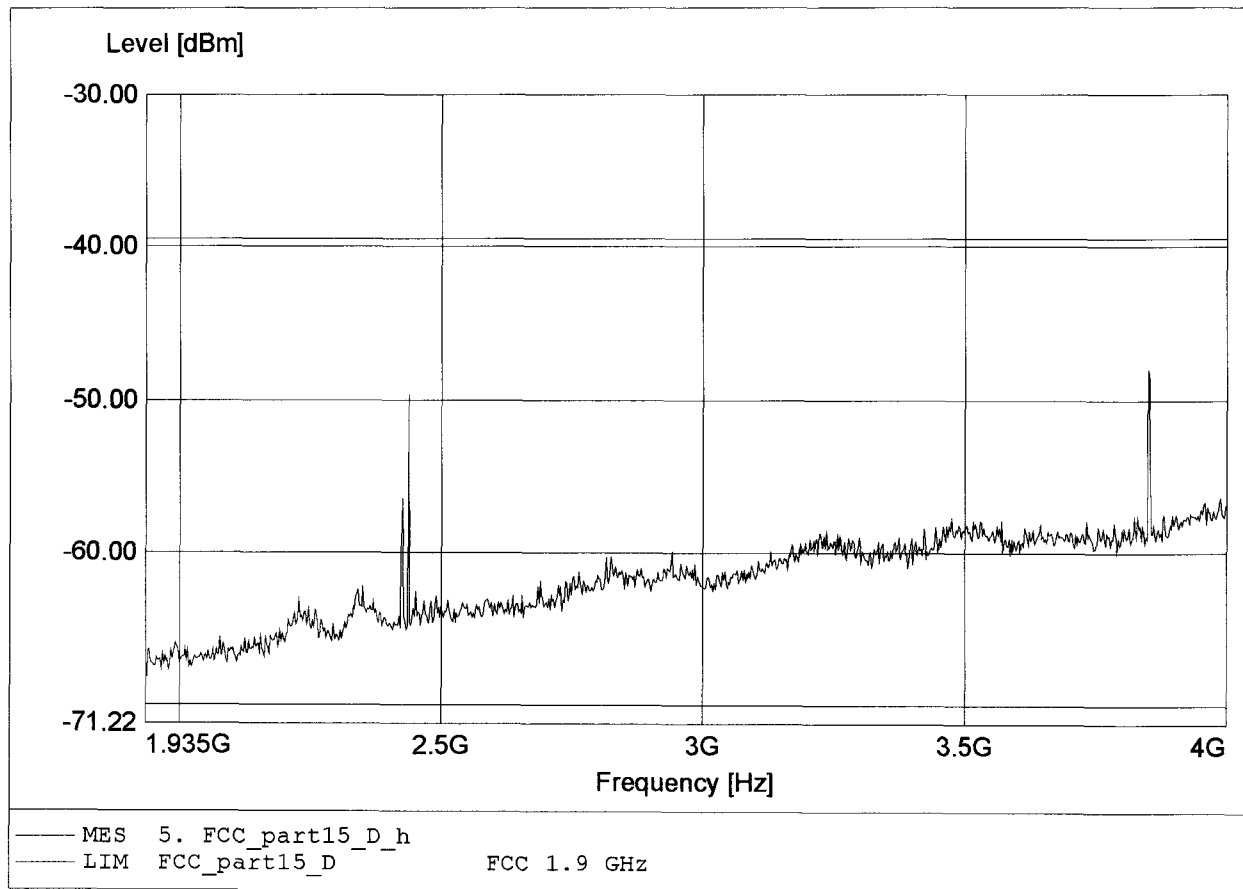

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Type approval holder: RTX Telecom A/S
EUT : GN9300 UPCS Base (CT)
Model: GN9300 / Ch.: 2 / antenna 2
Test Site / Operator: ETS / Mr. Cersovsky
Temperature/ Voltage: 23°C / 120 V AC (AC/DC adaptor)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:3.849GHz Pmax:-51.12dBm RBW:10 kHz

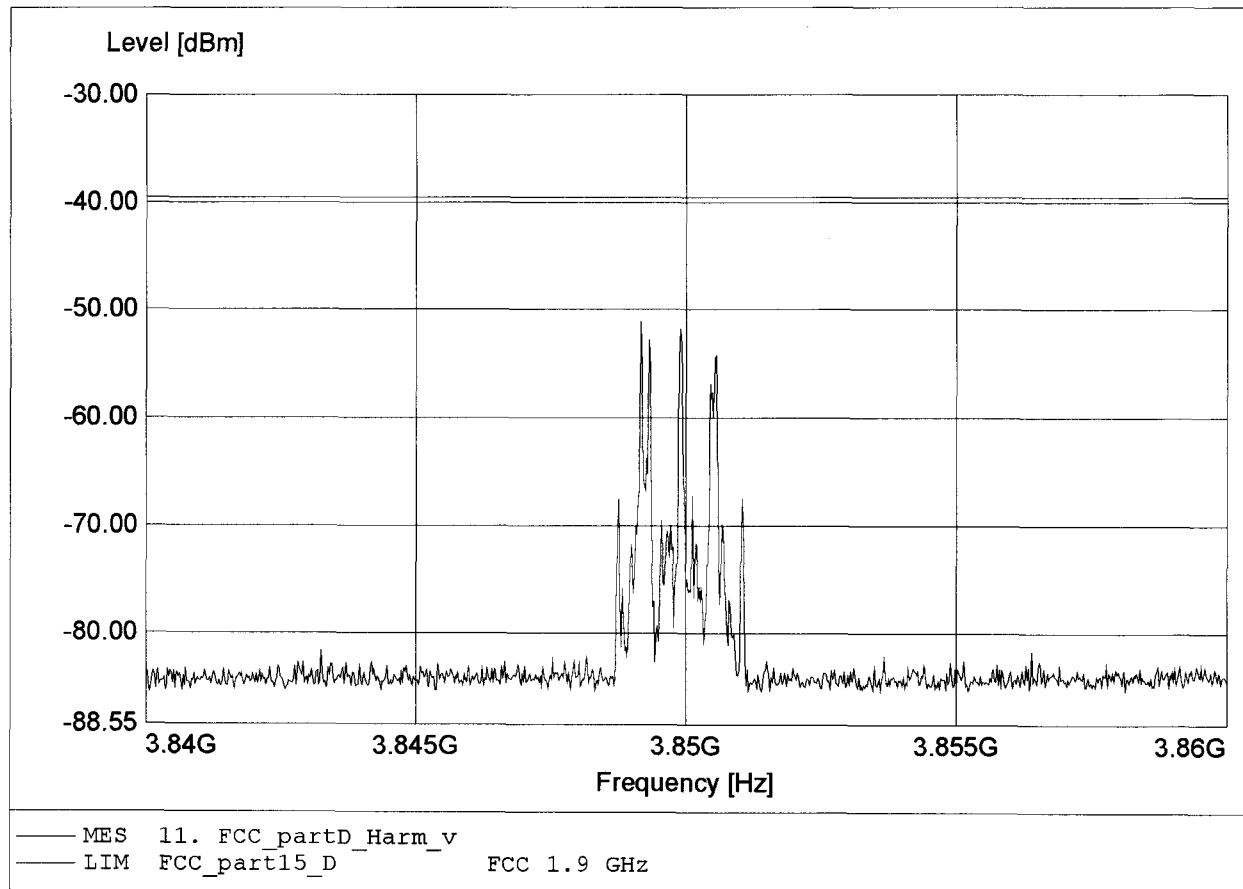

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Type approval holder: RTX Telecom A/S
EUT : GN9300 UPCS Base (CT)
Model: GN9300 / Ch.: 2 / antenna 2
Test Site / Operator: ETS / Mr. Cersovsky
Temperature/ Voltage: 23°C / 120 V AC (AC/DC adaptor)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:3.850GHz Pmax:-48.55dBm RBW:10 kHz

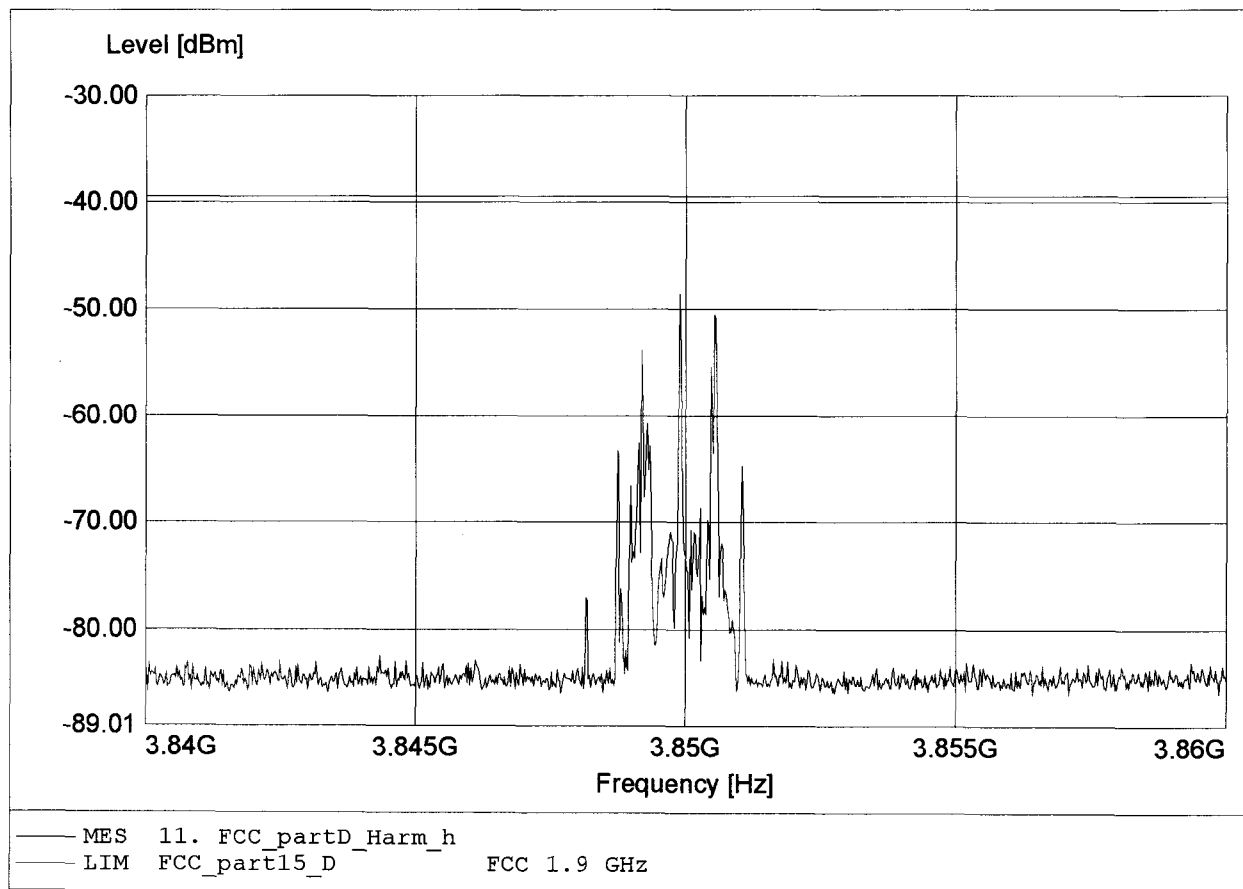

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Type approval holder: RTX Telecom A/S
EUT : GN9300 UPCS Base (CU)
Model: GN9300 / Ch.: 2 / antenna 2
Test Site / Operator: ETS / Mr. Cersovsky
Temperature/ Voltage: 23°C / 120 V AC (AC/DC adaptor)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HK 116,
Comment 2: Freq:170.533MHz Pmax:-54.10dBm RBW: 100 kHz

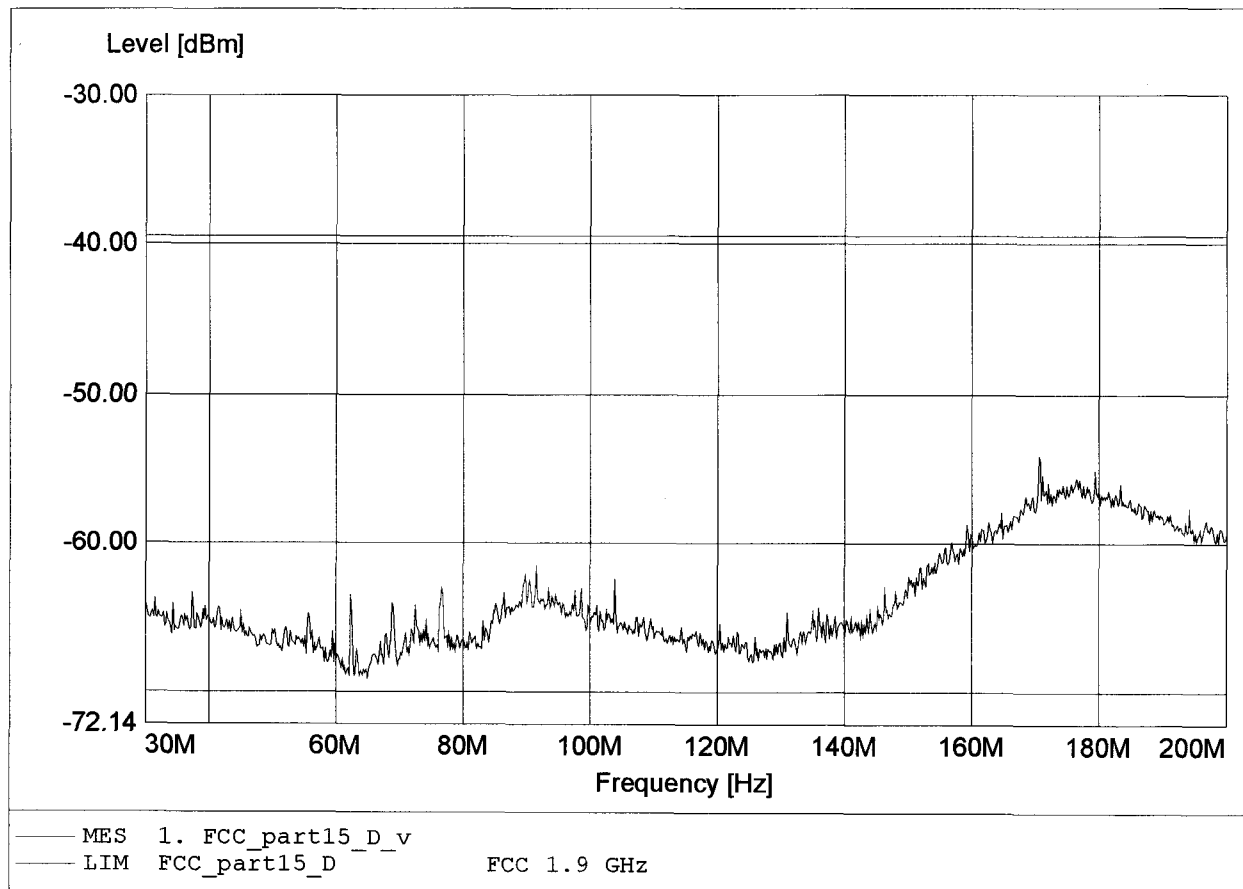

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Type approval holder: RTX Telecom A/S
EUT : GN9300 UPCS Base (CU)
Model: GN9300 / Ch.: 2 / antenna 2
Test Site / Operator: ETS / Mr. Cersovsky
Temperature/ Voltage: 23°C / 120 V AC (AC/DC adaptor)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HK 116,
Comment 2: Freq:197.167MHz Pmax:-59.89dBm RBW: 100 kHz

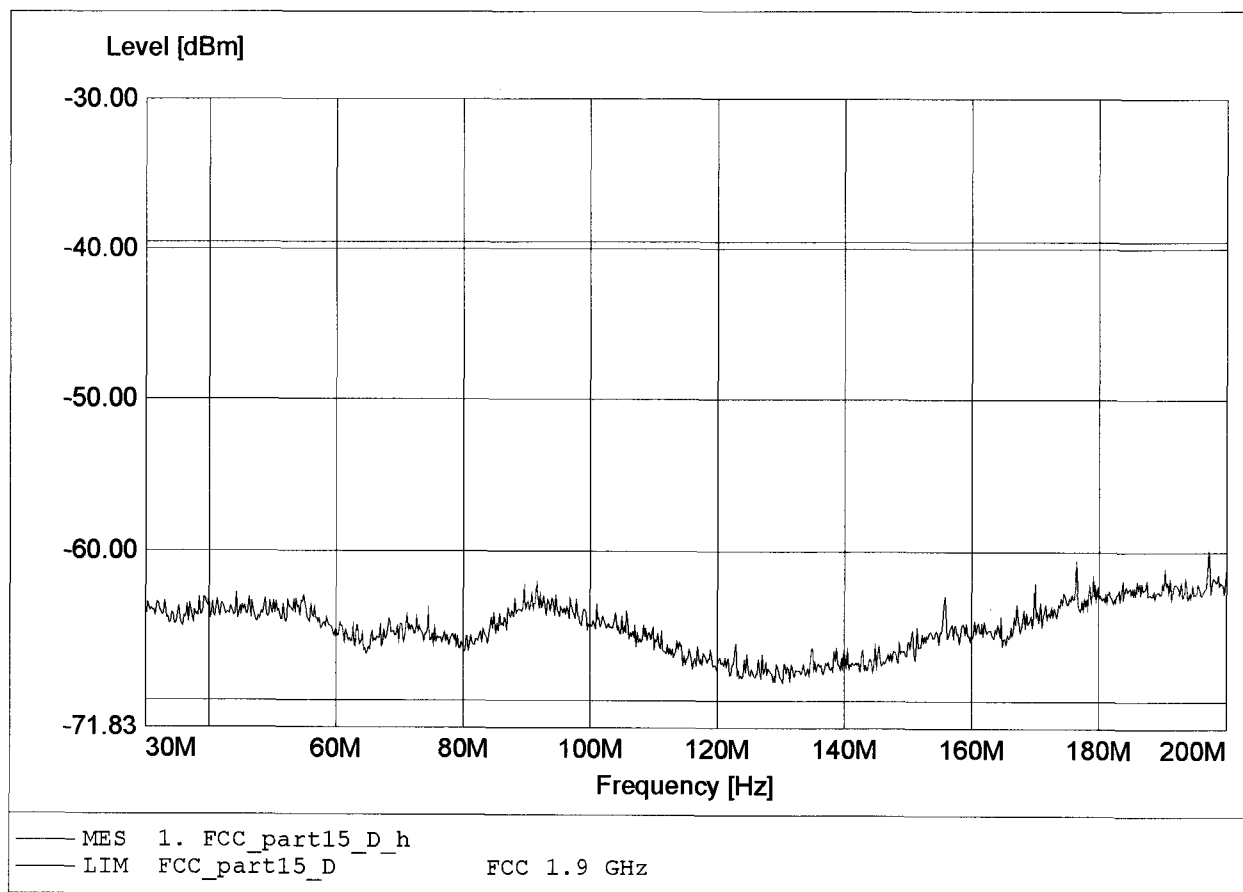

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Type approval holder: RTX Telecom A/S
EUT : GN9300 UPCS Base (CU)
Model: GN9300 / Ch.: 2 / antenna 2
Test Site / Operator: ETS / Mr. Cersovsky
Temperature/ Voltage: 23°C / 120 V AC (AC/DC adaptor)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
Comment 2: Freq:622.222MHz Pmax:-57.73dBm RBW: 100 kHz

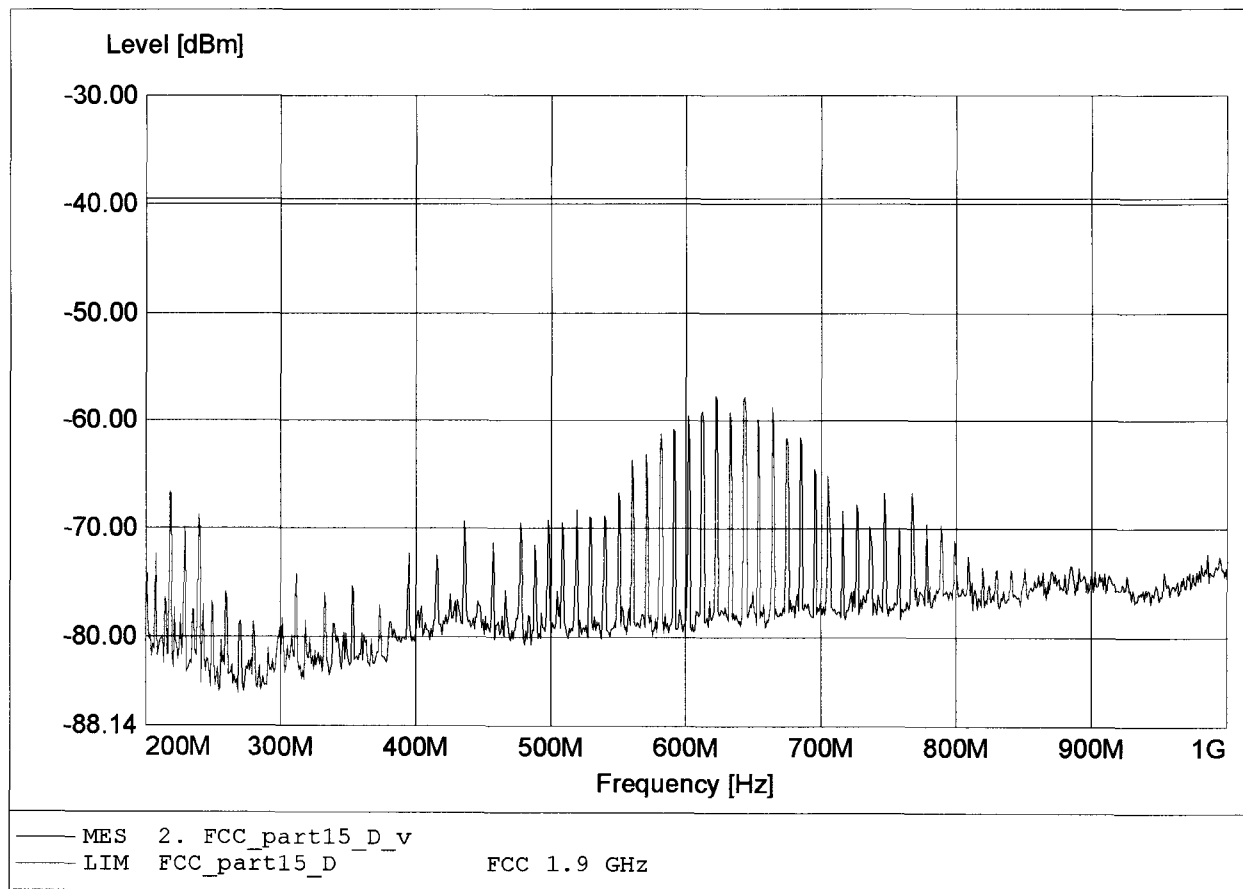

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Type approval holder: RTX Telecom A/S
EUT : GN9300 UPCS Base (CU)
Model: GN9300 / Ch.: 2 / antenna 2
Test Site / Operator: ETS / Mr. Cersovsky
Temperature/ Voltage: 23°C / 120 V AC (AC/DC adaptor)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
Comment 2: Freq: 622.222MHz Pmax: -59.43dBm RBW: 100 kHz

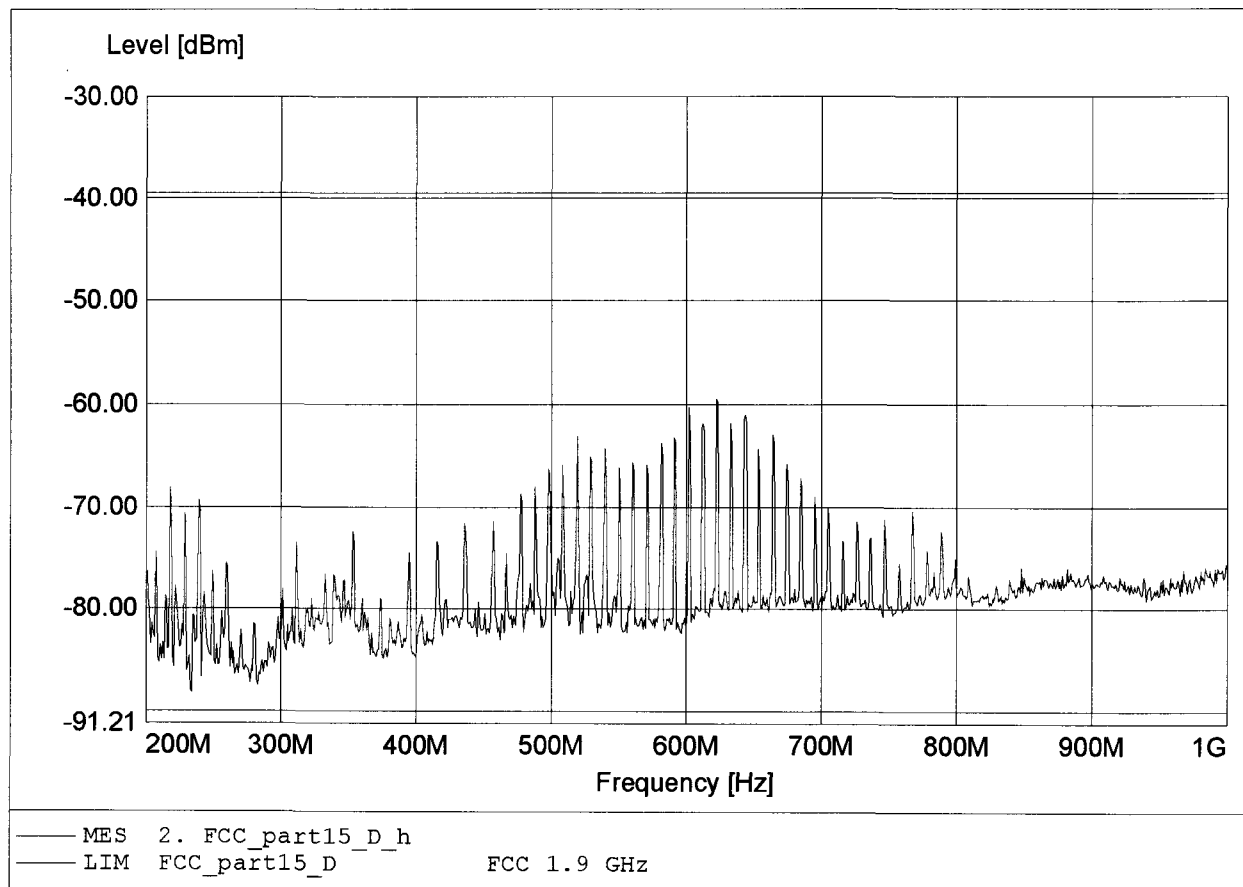

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Type approval holder: RTX Telecom A/S
EUT : GN9300 UPCS Base (CU)
Model: GN9300 / Ch.: 2 / antenna 2
Test Site / Operator: ETS / Mr. Cersovsky
Temperature/ Voltage: 23°C / 120 V AC (AC/DC adaptor)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:1.698GHz Pmax:-65.85dBm RBW: 100 kHz

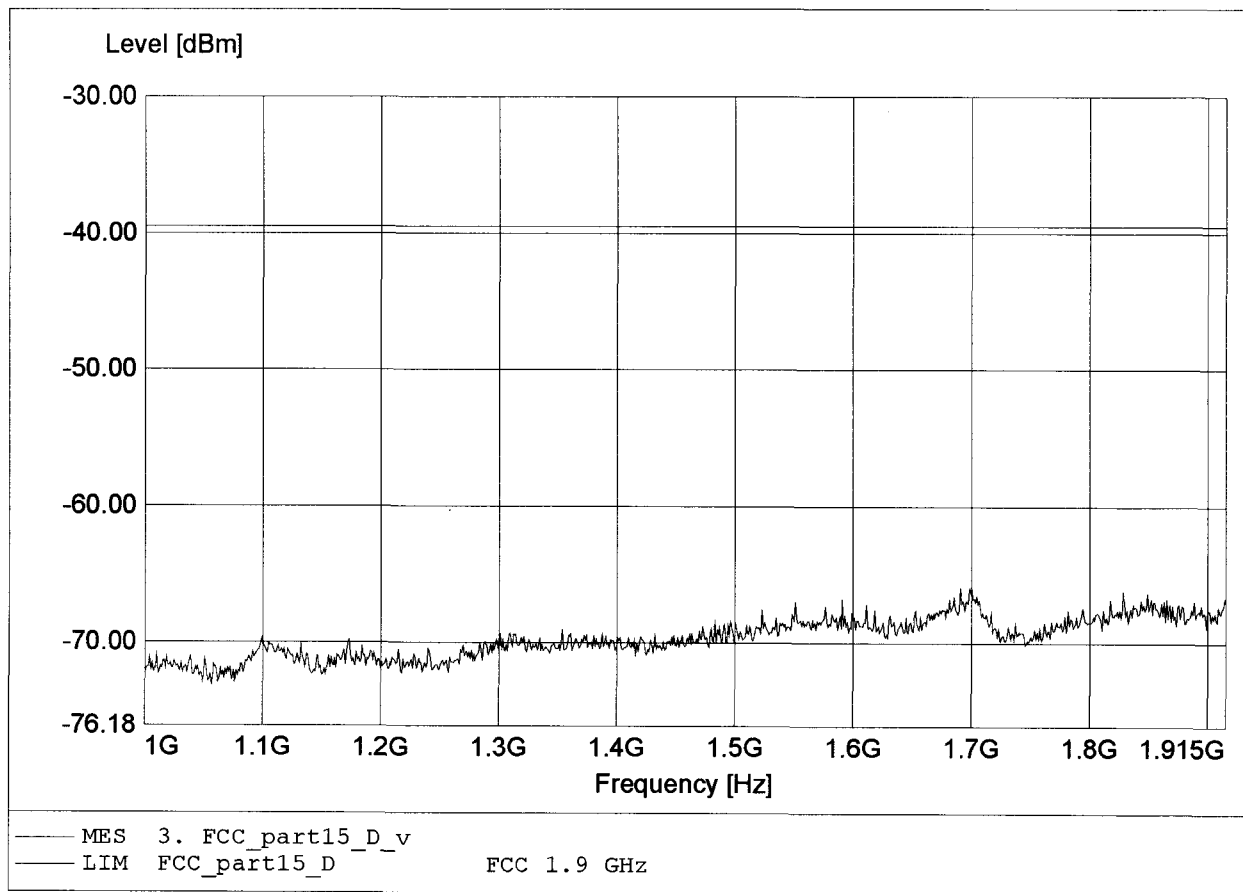

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Type approval holder: RTX Telecom A/S
EUT : GN9300 UPCS Base (CU)
Model: GN9300 / Ch.: 2 / antenna 2
Test Site / Operator: ETS / Mr. Cersovsky
Temperature/ Voltage: 23°C / 120 V AC (AC/DC adaptor)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:1.703GHz Pmax:-65.49dBm RBW: 100 kHz

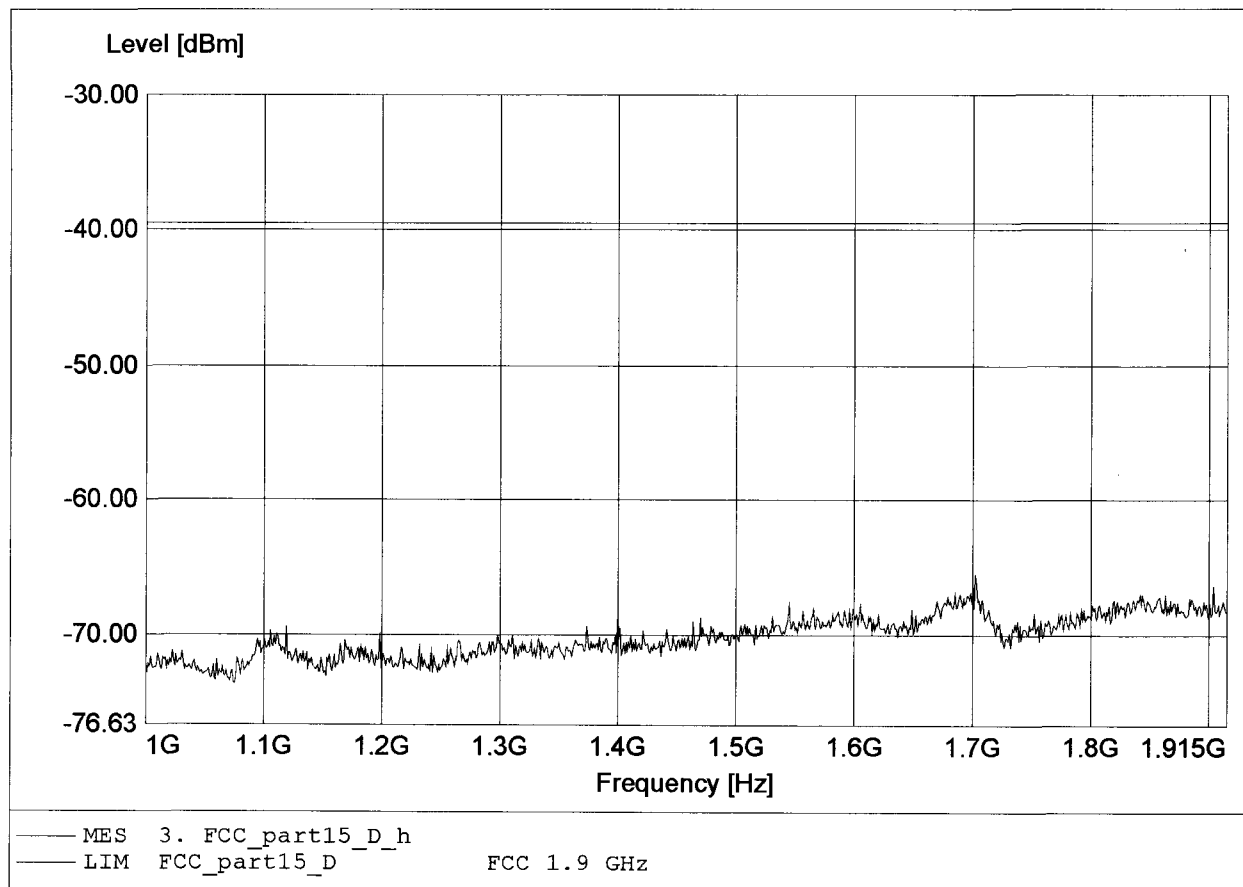

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Type approval holder: RTX Telecom A/S
EUT : GN9300 UPCS Base (CU)
Model: GN9300 / Ch.: 2 / antenna 2
Test Site / Operator: ETS / Mr. Cersovsky
Temperature/ Voltage: 23°C / 120 V AC (AC/DC adaptor)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:1.920GHz Pmax:-75.73dBm RBW: 10 kHz

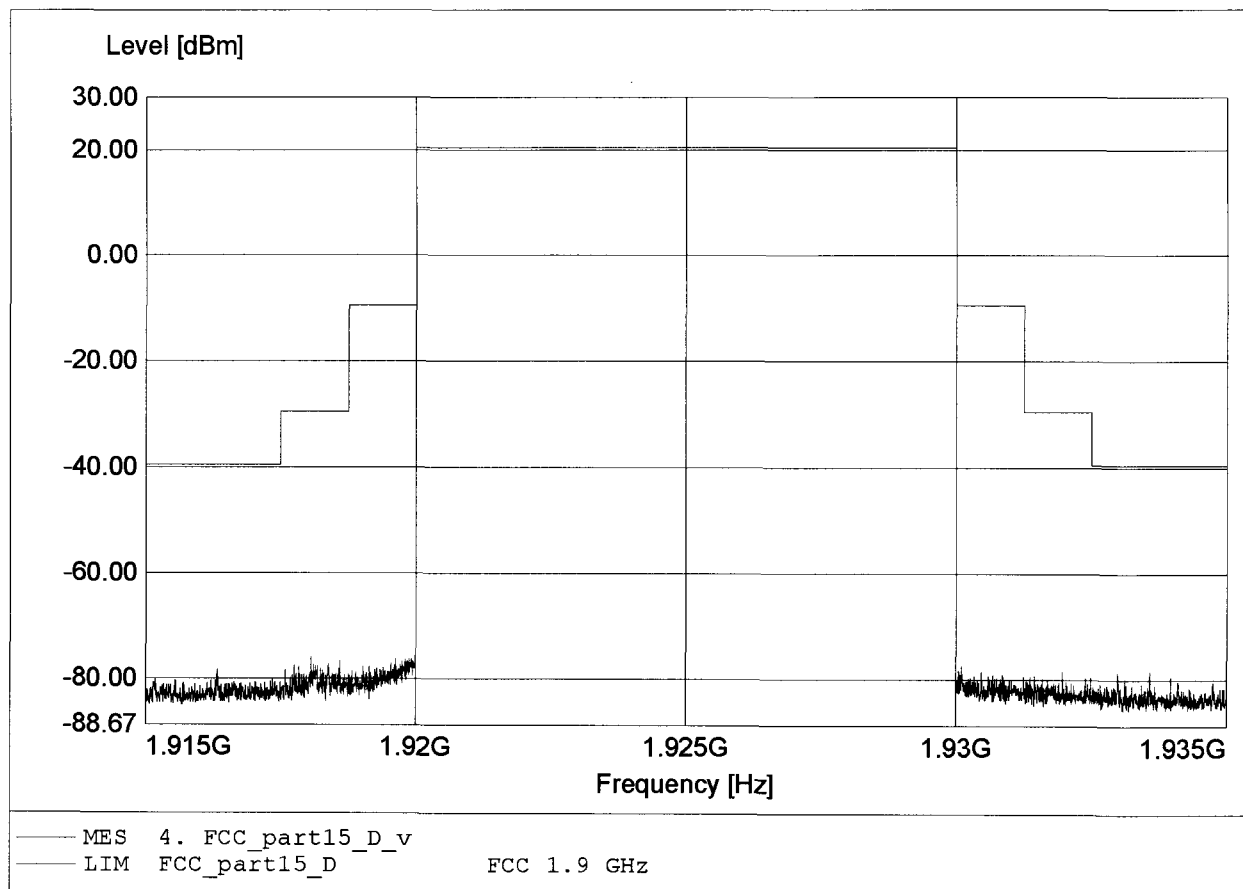

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Type approval holder: RTX Telecom A/S
EUT : GN9300 UPCS Base (CU)
Model: GN9300 / Ch.: 2 / antenna 2
Test Site / Operator: ETS / Mr. Cersovsky
Temperature/ Voltage: 23°C / 120 V AC (AC/DC adaptor)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:1.918GHz Pmax:-71.55dBm RBW: 10 kHz

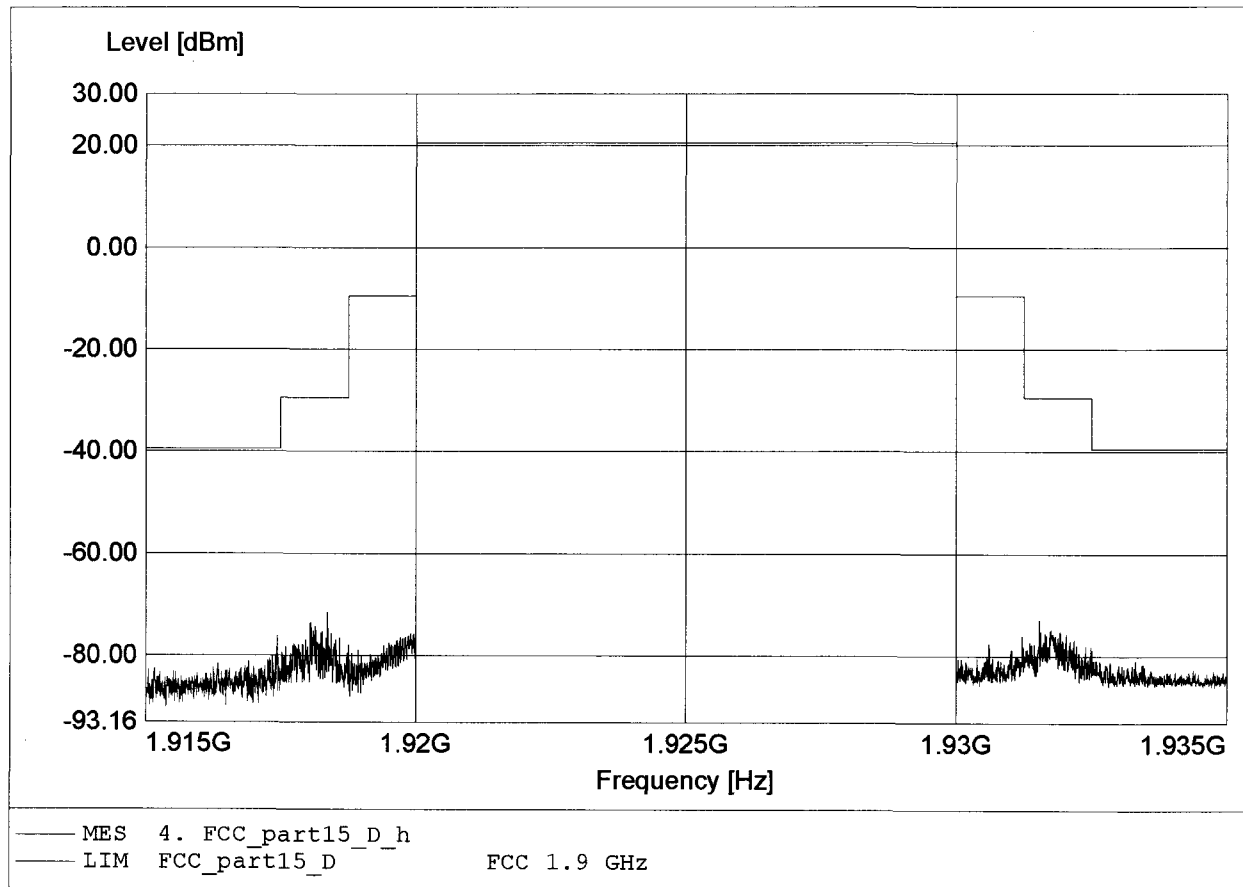

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Type approval holder: RTX Telecom A/S
EUT : GN9300 UPCS Base (CU)
Model: GN9300 / Ch.: 2 / antenna 2
Test Site / Operator: ETS / Mr. Cersovsky
Temperature/ Voltage: 23°C / 120 V AC (AC/DC adaptor)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq: 3.851GHz Pmax: -46.34dBm RBW: 100 kHz

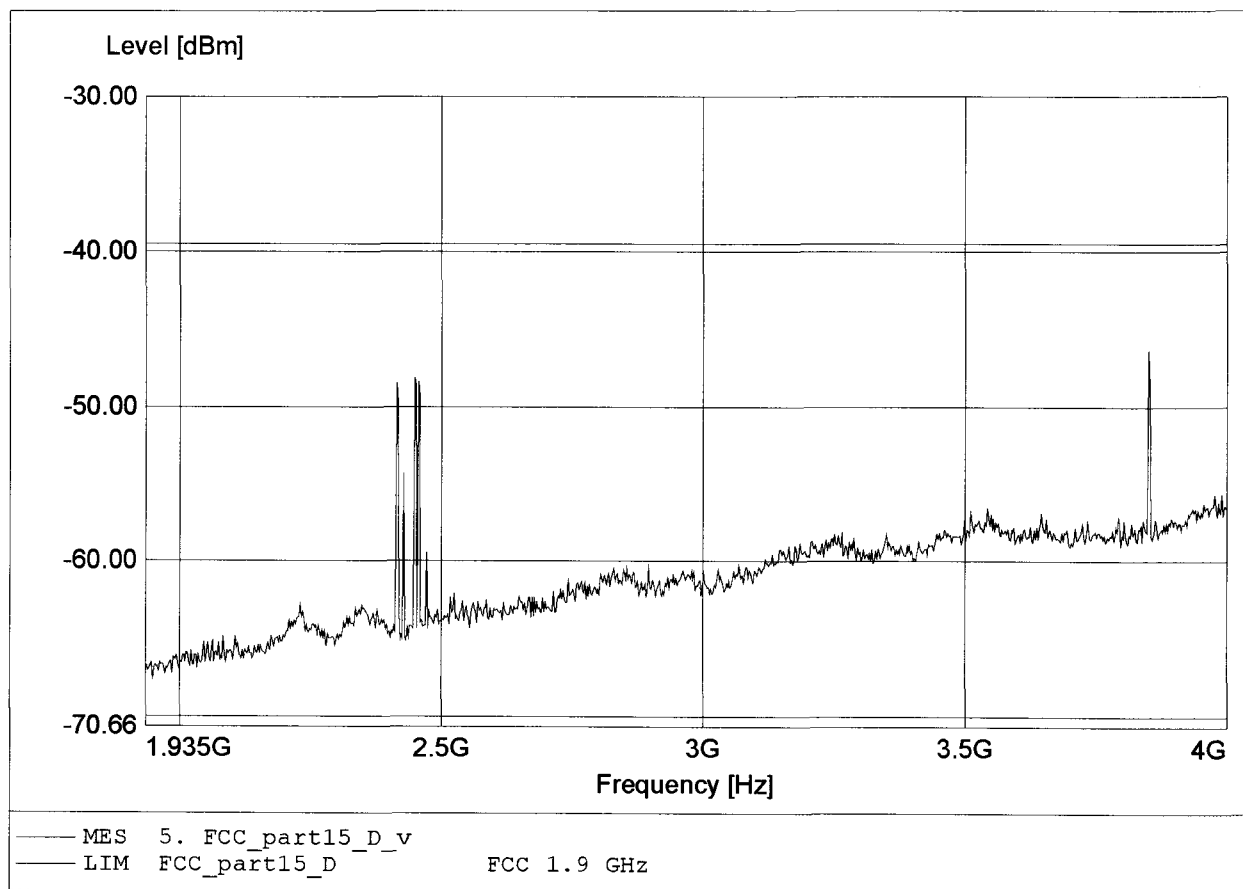

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Type approval holder: RTX Telecom A/S
EUT : GN9300 UPCS Base (CU)
Model: GN9300 / Ch.: 2 / antenna 2
Test Site / Operator: ETS / Mr. Cersovsky
Temperature/ Voltage: 23°C / 120 V AC (AC/DC adaptor)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:3.851GHz Pmax:-45.02dBm RBW: 100 kHz

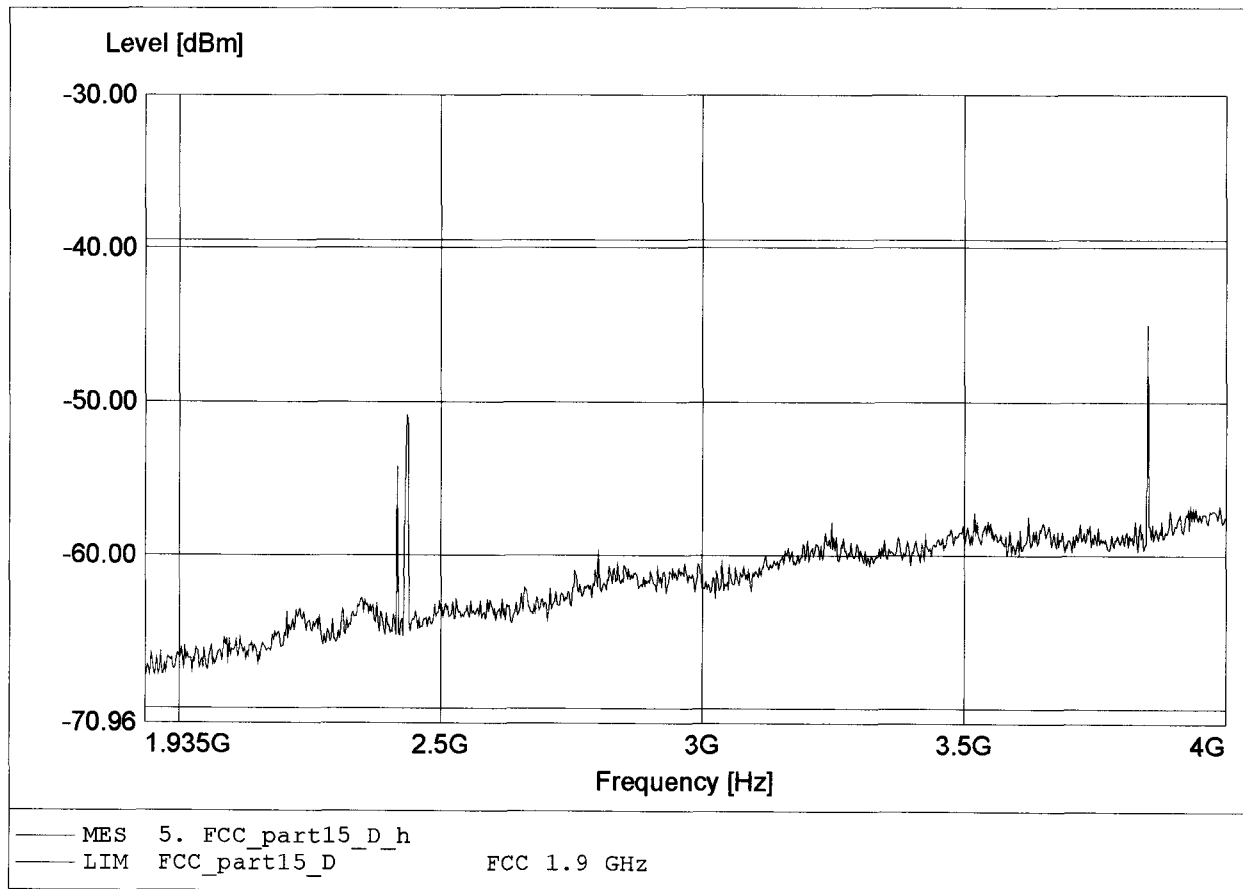

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Type approval holder: RTX Telecom A/S
EUT : GN9300 UPCS Base (CU)
Model: GN9300 / Ch.: 2 / antenna 2
Test Site / Operator: ETS / Mr. Cersovsky
Temperature/ Voltage: 23°C / 120 V AC (AC/DC adaptor)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:3.849GHz Pmax:-52.16dBm RBW:10 kHz

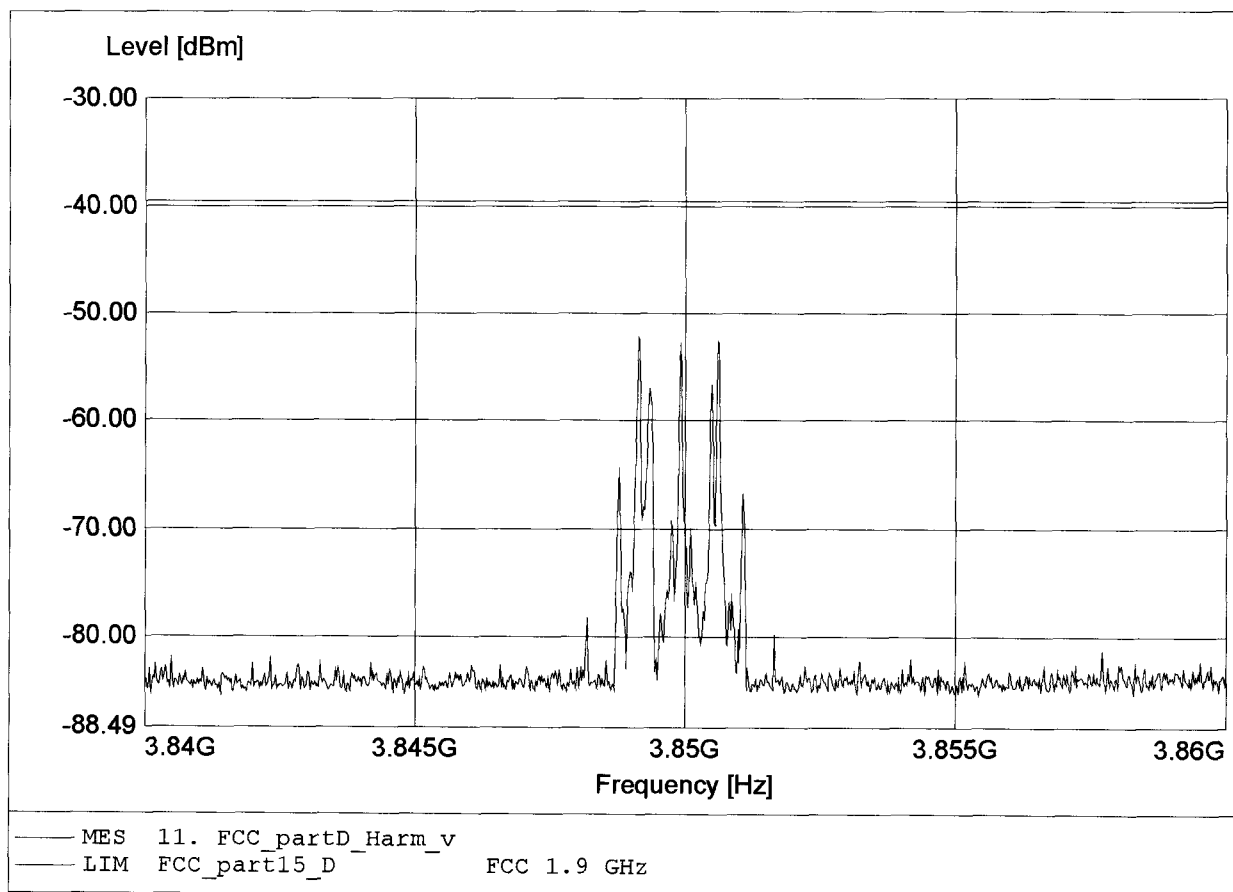

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)

Type approval holder: RTX Telecom A/S
EUT : GN9300 UPCS Base (CU)
Model: GN9300 / Ch.: 2 / antenna 2
Test Site / Operator: ETS / Mr. Cersovsky
Temperature/ Voltage: 23°C / 120 V AC (AC/DC adaptor)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:3.851GHz Pmax:-48.05dBm RBW:10 kHz

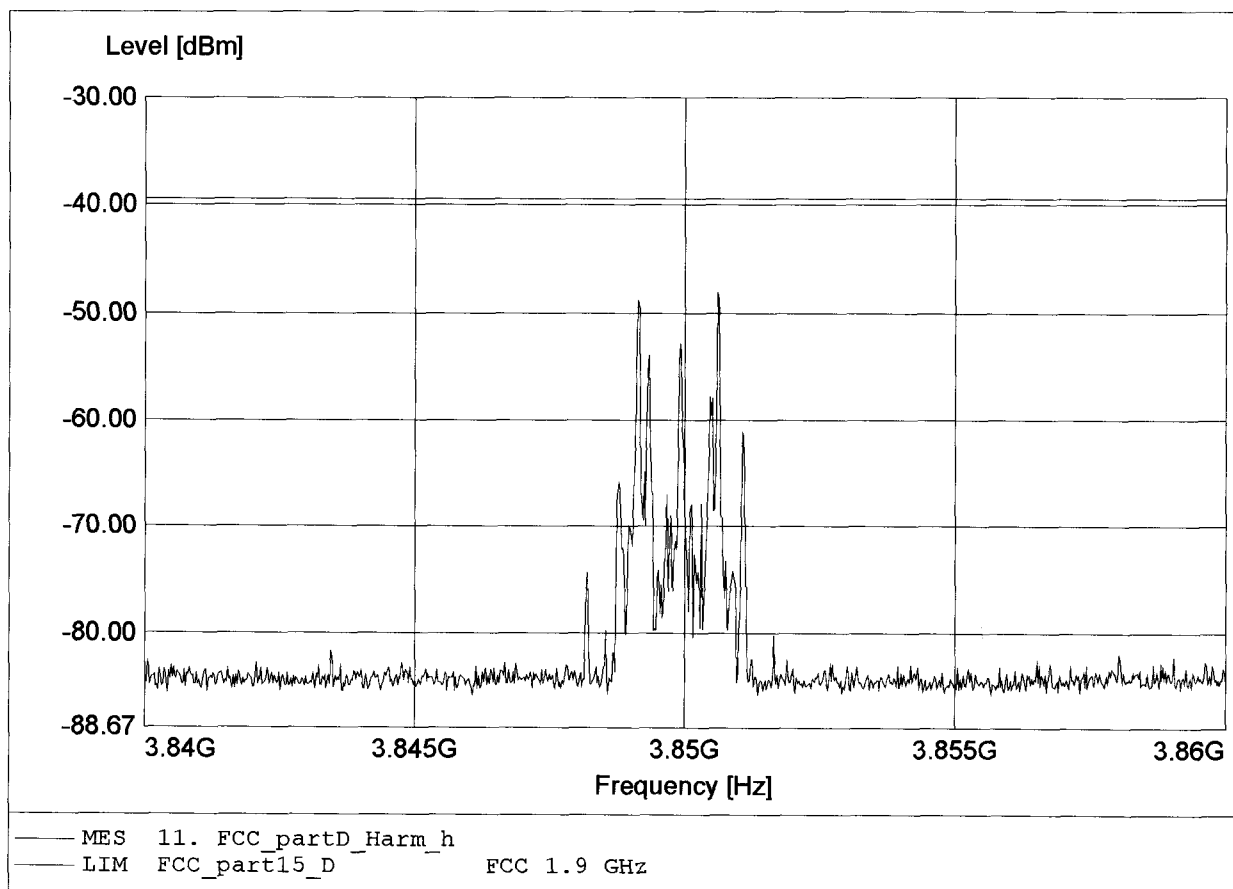



Appendix T

Frame period



Appendix U

Frequency stability