

Appendix A. Test Result of AC Power Line Conducted Emission

TX_BT3M_2441MHz_Line

Site :HY-SR01
Condition :Line
Mode :TX_BT3M_2441MHz
test by :Kevin

Level (dBuV)


100
87.5
75.0
62.5
50.0
37.5
25.0
12.5
0

0.15 0.2 0.5 1 2 5 10 20 30

Frequency (MHz)

Date: 2025-06-12

Conduction(QP)
Conduction(AV)

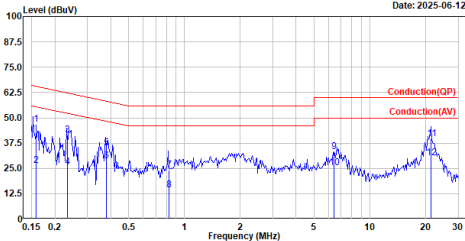

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV	Line	Limit	Level	dB	
1	0.159	46.95	65.52	-18.57	37.31	9.64	QP
2	0.159	26.36	55.52	-29.16	16.72	9.64	Average
3	0.233	41.68	62.33	-20.65	32.04	9.64	QP
4	0.233	25.74	52.33	-26.59	16.10	9.64	Average
5	0.380	35.00	58.28	-23.28	25.36	9.64	QP
6	0.380	28.67	48.28	-19.61	19.03	9.64	Average
7	0.828	24.00	56.00	-32.00	14.32	9.68	QP
8	0.828	14.48	46.00	-31.52	4.00	9.68	Average
9	6.431	33.32	60.00	-26.68	23.17	10.15	QP
10	6.431	25.29	50.00	-24.71	15.14	10.15	Average
11	21.396	39.67	60.00	-20.33	29.81	9.86	QP
12	21.396	30.19	50.00	-19.81	20.33	9.86	Average

Note:
1. Level = Read Level + Factor
2. Factor = LISN insertion loss + Cable loss
3. Over Limit = Level - Limit Line

TX_BT3M_2441MHz_Neutral

Site :HY-SR01
Condition :Neutral
Mode :TX_BT3M_2441MHz
test by :Kevin

Level (dBuV)


100
87.5
75.0
62.5
50.0
37.5
25.0
12.5
0

0.15 0.2 0.5 1 2 5 10 20 30

Frequency (MHz)

Date: 2025-06-12

Conduction(QP)
Conduction(AV)

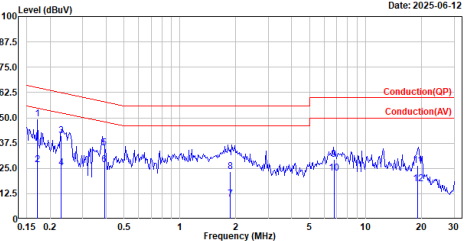


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV	Line	Limit	Level	dB	
1	0.171	49.26	64.93	-15.67	39.64	9.62	QP
2	0.171	26.85	54.93	-28.08	17.23	9.62	Average
3	0.230	40.95	62.45	-21.50	31.33	9.62	QP
4	0.230	25.19	52.45	-27.26	15.57	9.62	Average
5	0.392	35.23	58.02	-22.79	25.61	9.62	QP
6	0.392	26.91	48.02	-21.11	17.29	9.62	Average
7	1.866	9.74	56.00	-46.26	0.00	9.74	QP
8	1.866	23.48	46.00	-22.52	13.74	9.74	Average
9	6.749	29.38	60.00	-30.62	19.24	10.14	QP
10	6.749	22.66	50.00	-27.34	12.52	10.14	Average
11	19.001	26.46	60.00	-33.54	16.53	9.93	QP
12	19.001	17.54	50.00	-32.46	7.61	9.93	Average

Note:
1. Level = Read Level + Factor
2. Factor = LISN insertion loss + Cable loss
3. Over Limit = Level - Limit Line


Appendix B. Test Result of 20dB Bandwidth

Modulation	Frequency (MHz)	Measure Level (MHz)	Limit (MHz)
GFSK	2402	0.96	-
	2441	0.96	-
	2480	0.96	-
8DPSK	2402	1.28	-
	2441	1.28	-
	2480	1.28	-

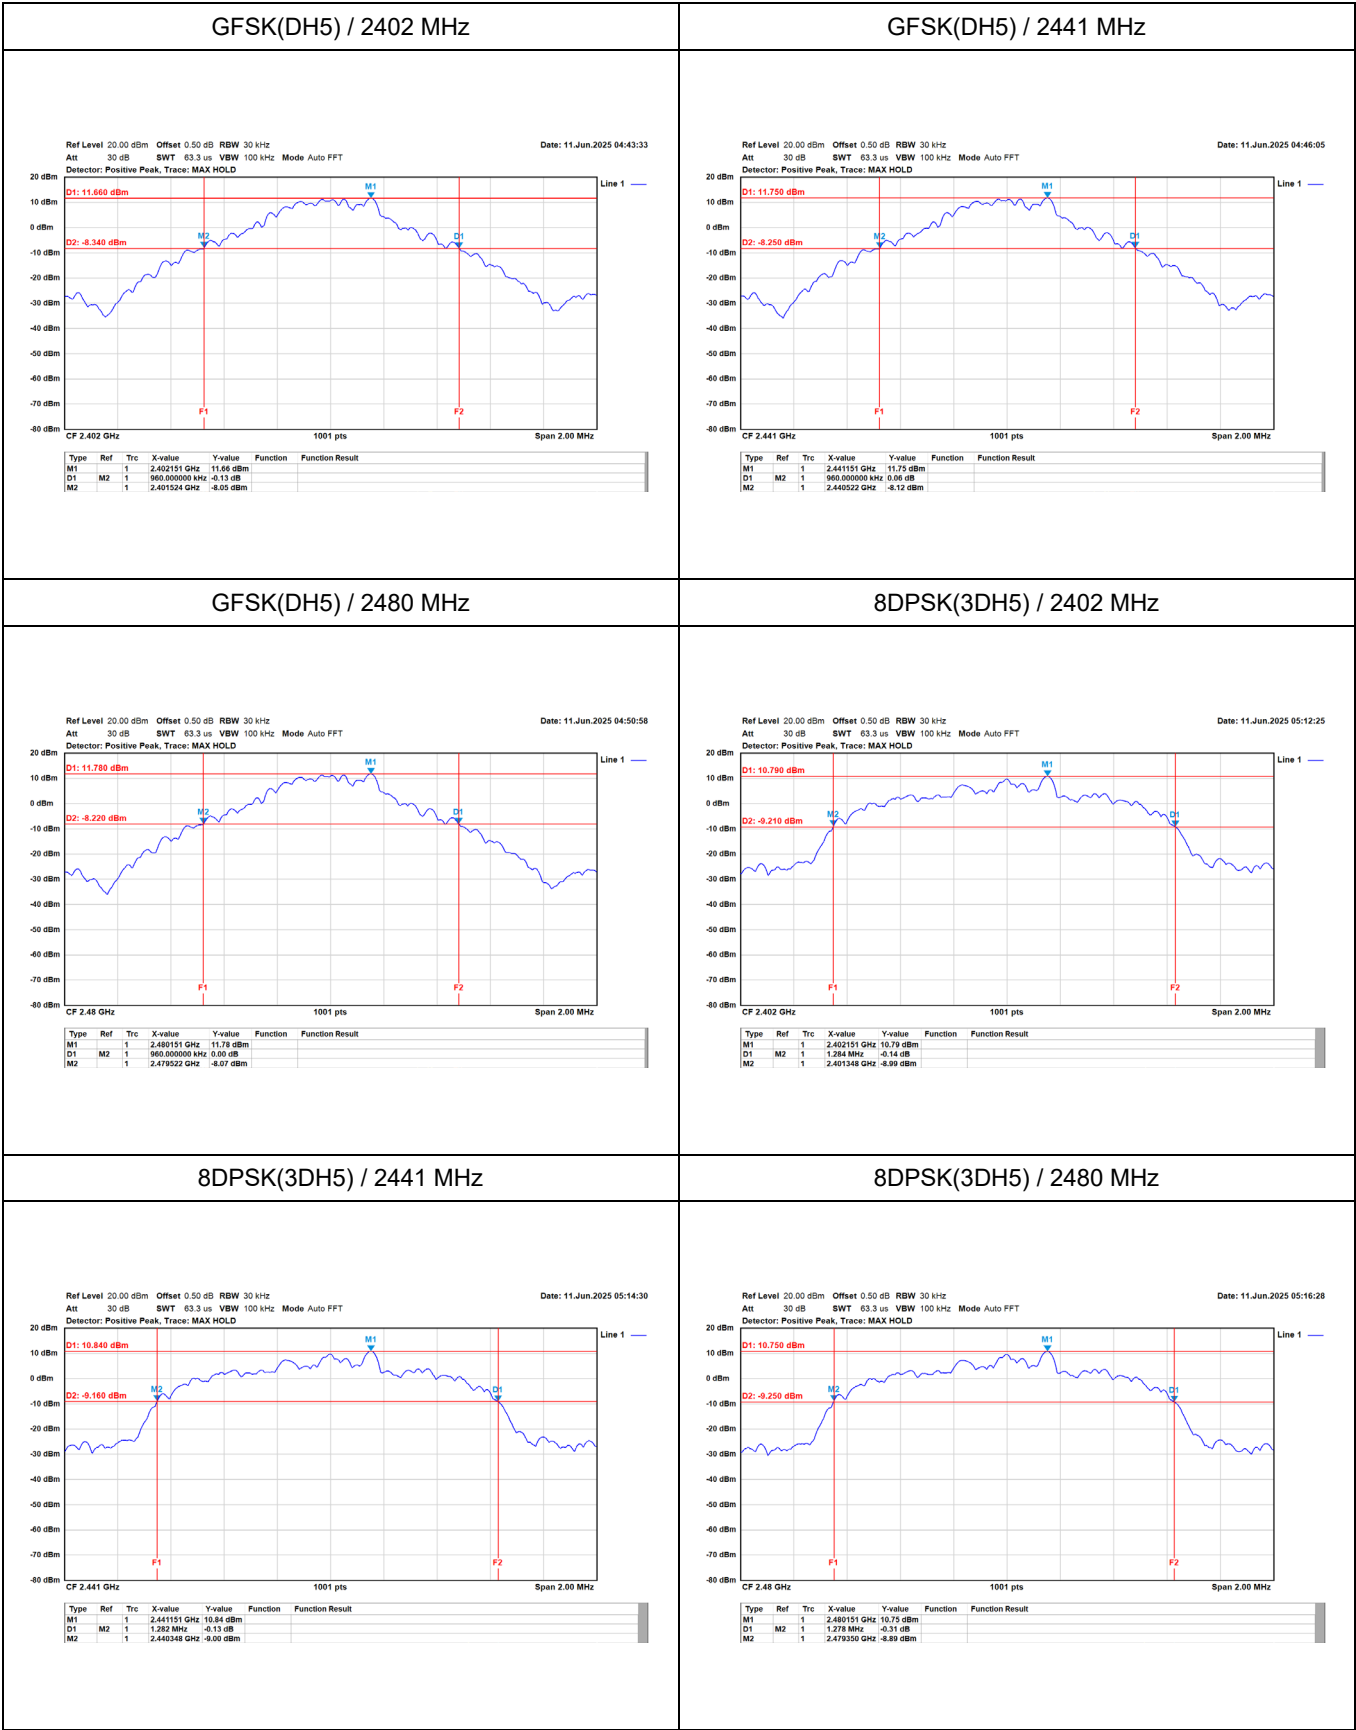

Appendix C. Test Result of Carrier Frequency Separation

Modulation	Frequency (MHz)	Measure Level (MHz)	Limit (MHz)	Result
GFSK	2402	1.00	0.640	Pass
	2441	1.00	0.640	Pass
	2480	0.99	0.640	Pass
8DPSK	2402	1.00	0.856	Pass
	2441	1.00	0.855	Pass
	2480	0.99	0.852	Pass

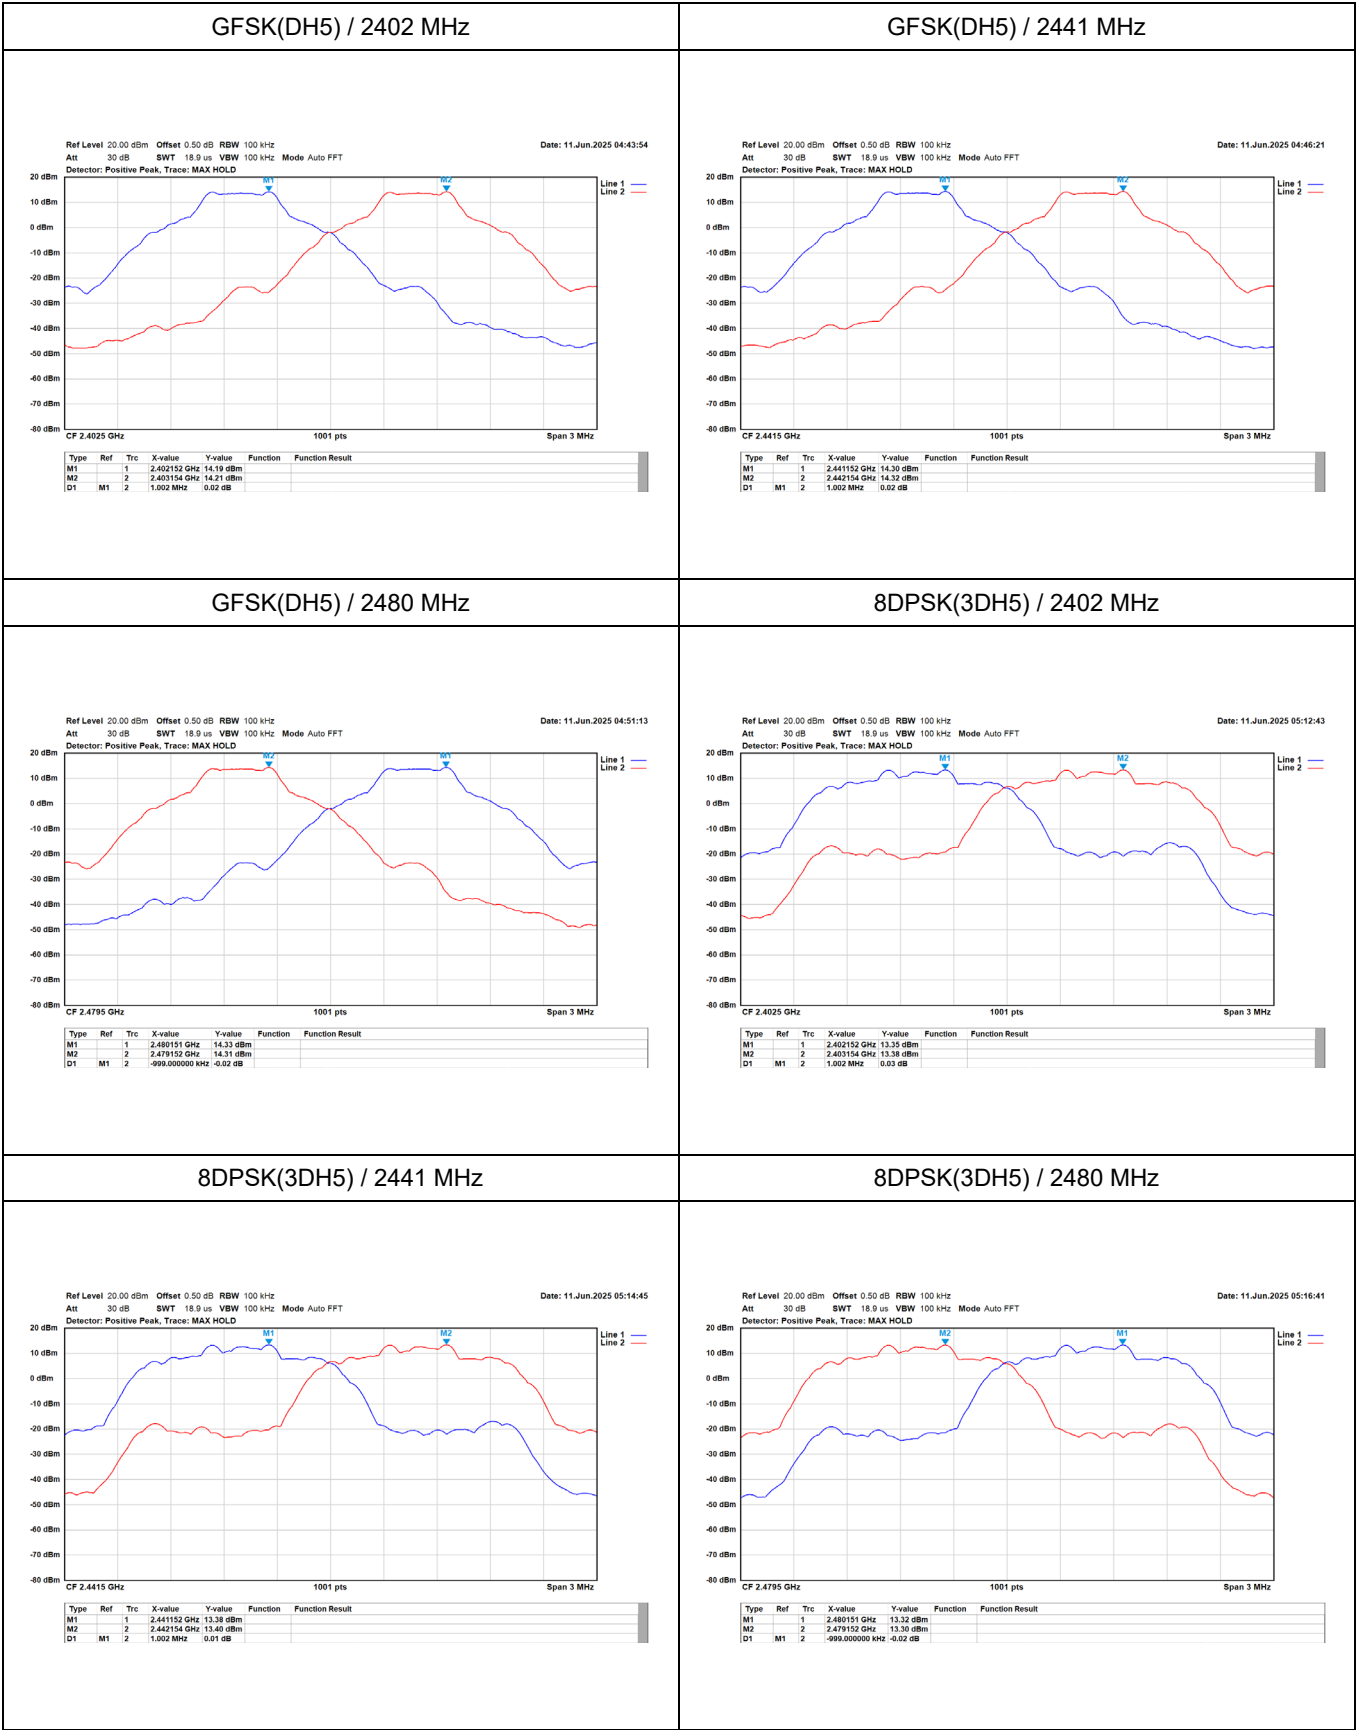


Appendix D. Test Result of Maximum Peak Conducted Output Power

Modulation	Frequency (MHz)	Maximum Conducted Peak Output Power (dBm)	Limit (dBm)	Result
GFSK	2402	14.63	21.00	Pass
	2441	14.49	21.00	Pass
	2480	14.35	21.00	Pass
8DPSK	2402	12.31	21.00	Pass
	2441	12.05	21.00	Pass
	2480	11.88	21.00	Pass


Appendix E. Test Result of Number of Hopping Frequency

Frequency Range (MHz)	Measure Level (Channels)	Limit (Channels)
2402.0 ~ 2480.0	79	≥ 15

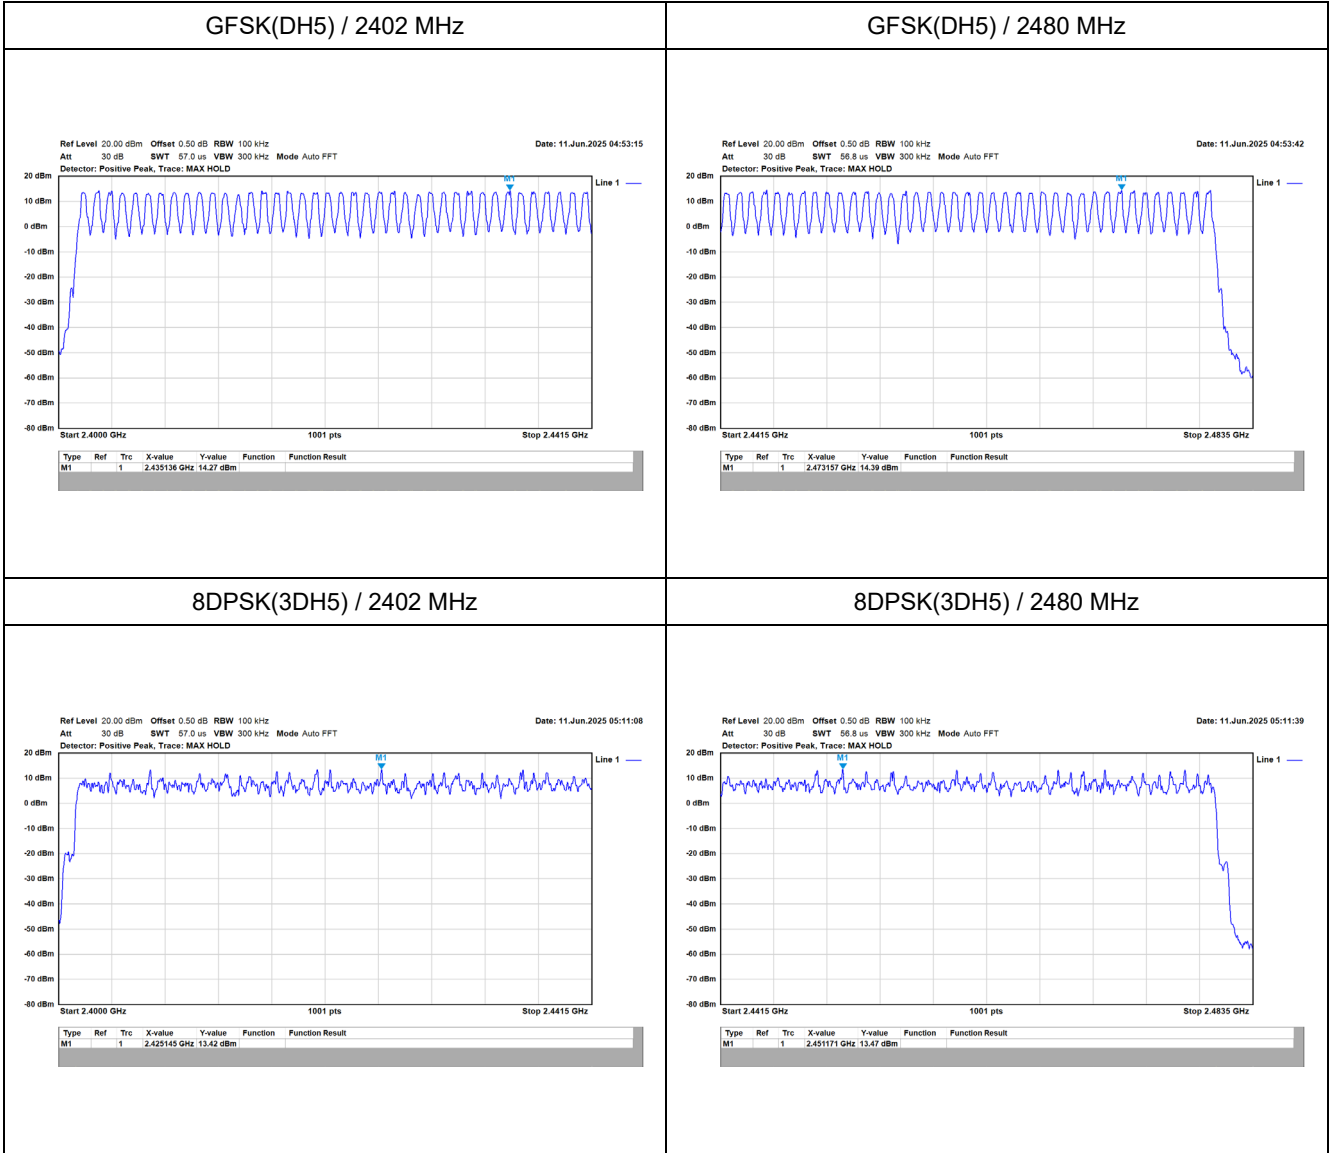


Appendix F. Test Result of Dwell Time

Modulation	Occupancy Time of Frequency Hopping System
GFSK	A) 2402 MHz Test Time Period: $0.4 \times 79 = 31.60$ sec, Time slot length : $2.86 = 0.002860$ sec Dwell Time : $0.002860 \times (266.67/79) \times 31.60 = 0.305$ sec °
	B) 2441 MHz Test Time Period: $0.4 \times 79 = 31.60$ sec, Time slot length : $2.84 = 0.002840$ sec Dwell Time : $0.002840 \times (266.67/79) \times 31.60 = 0.303$ sec °
	C) 2480 MHz Test Time Period: $0.4 \times 79 = 31.60$ sec, Time slot length : $2.84 = 0.002840$ sec Dwell Time : $0.002840 \times (266.67/79) \times 31.60 = 0.303$ sec °
8DPSK	A) 2402 MHz Test Time Period: $0.4 \times 79 = 31.60$ sec, Time slot length : $2.84 = 0.002840$ sec Dwell Time : $0.002840 \times (266.67/79) \times 31.60 = 0.303$ sec °
	B) 2441 MHz Test Time Period: $0.4 \times 79 = 31.60$ sec, Time slot length : $2.86 = 0.002860$ sec Dwell Time : $0.002860 \times (266.67/79) \times 31.60 = 0.305$ sec °
	C) 2480 MHz Test Time Period: $0.4 \times 79 = 31.60$ sec, Time slot length : $2.86 = 0.002860$ sec Dwell Time : $0.002860 \times (266.67/79) \times 31.60 = 0.305$ sec °
Test Result: The Average Occupancy Time of Each Highest , Middle and Lowest Channel Is Less Than 0.4 sec, And Corresponds to The Standard °	

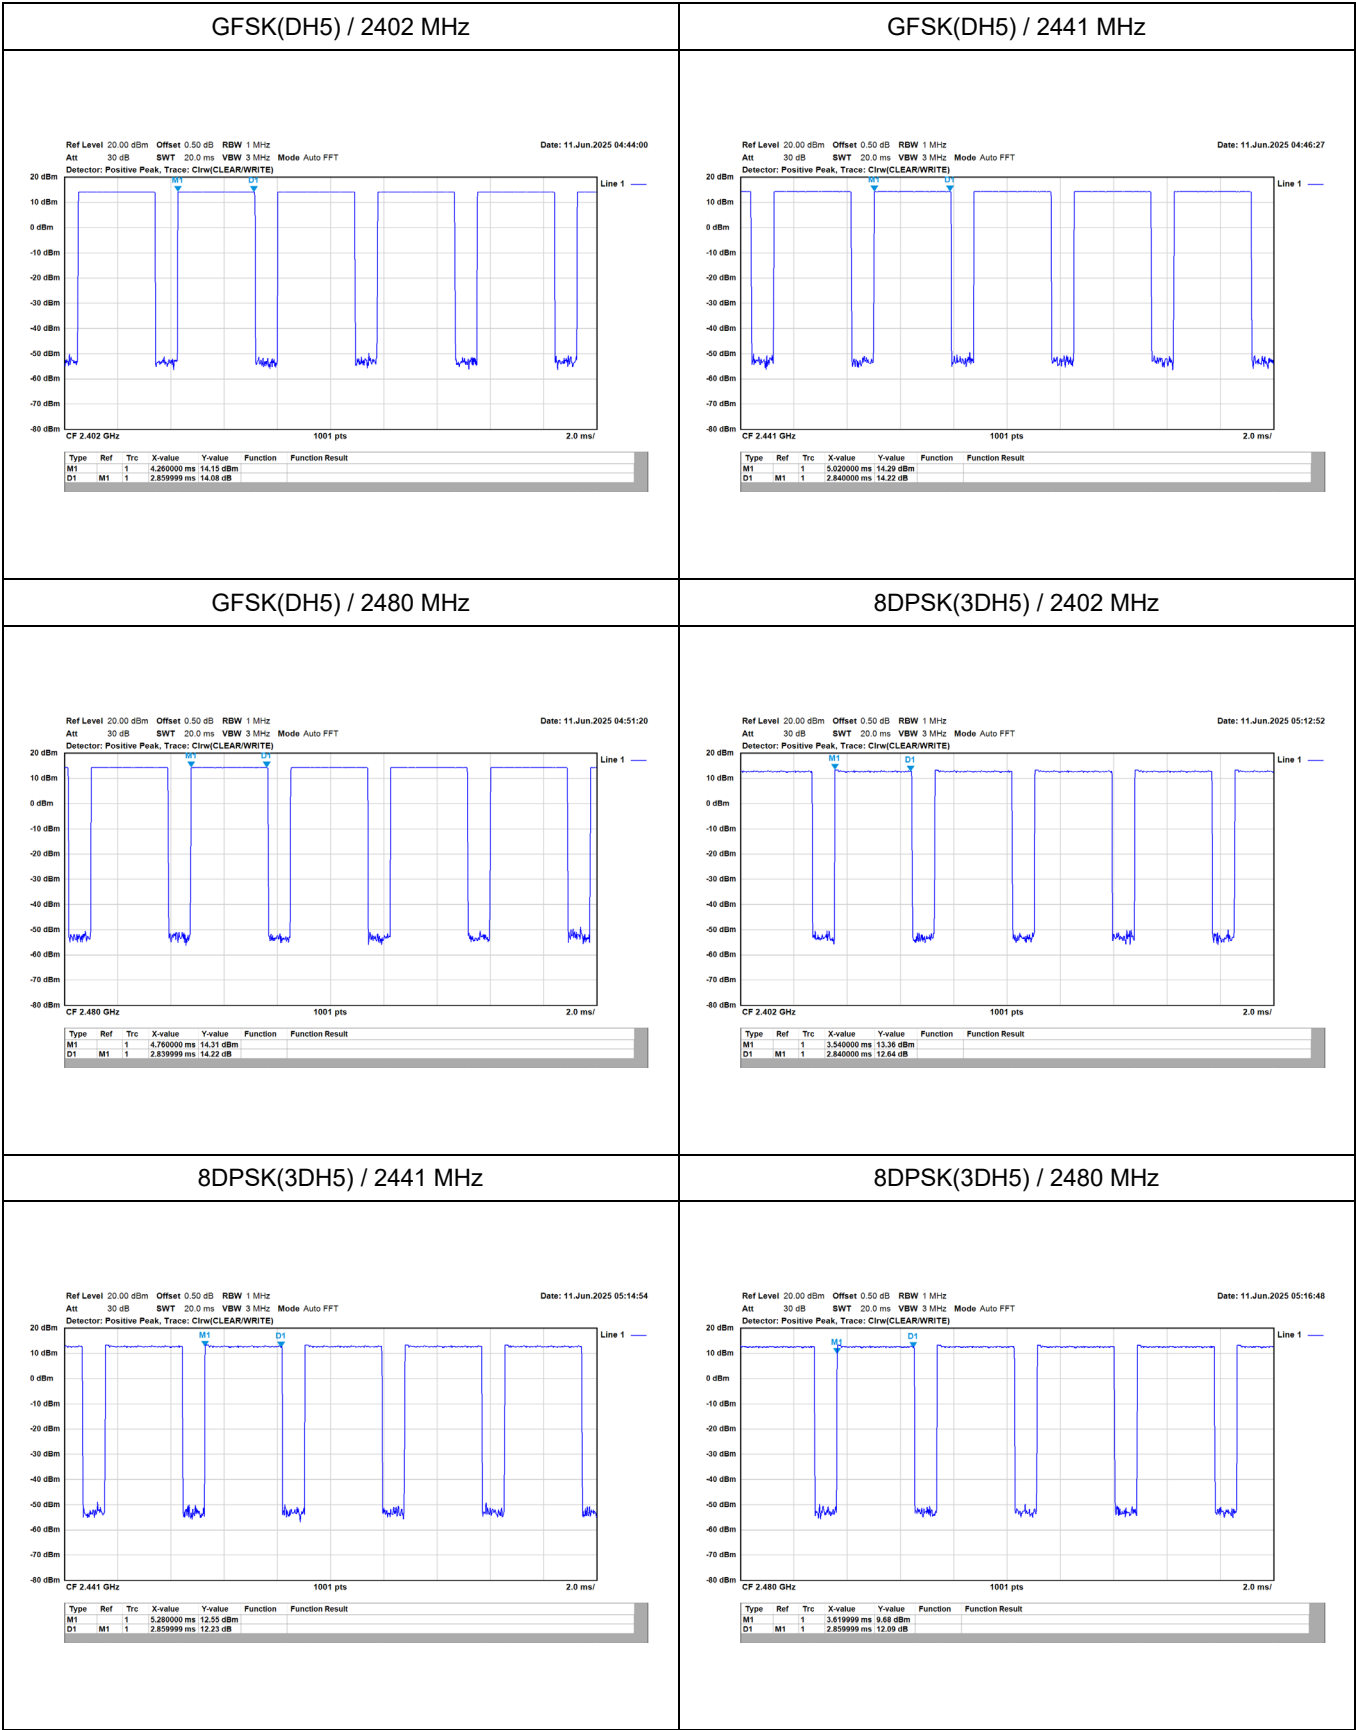


Appendix G. Test Result of Antenna Port Conducted Emission


Modulation	Measurement Level Δ (dB)	Result
GFSK	> 20	Pass
8DPSK	> 20	Pass

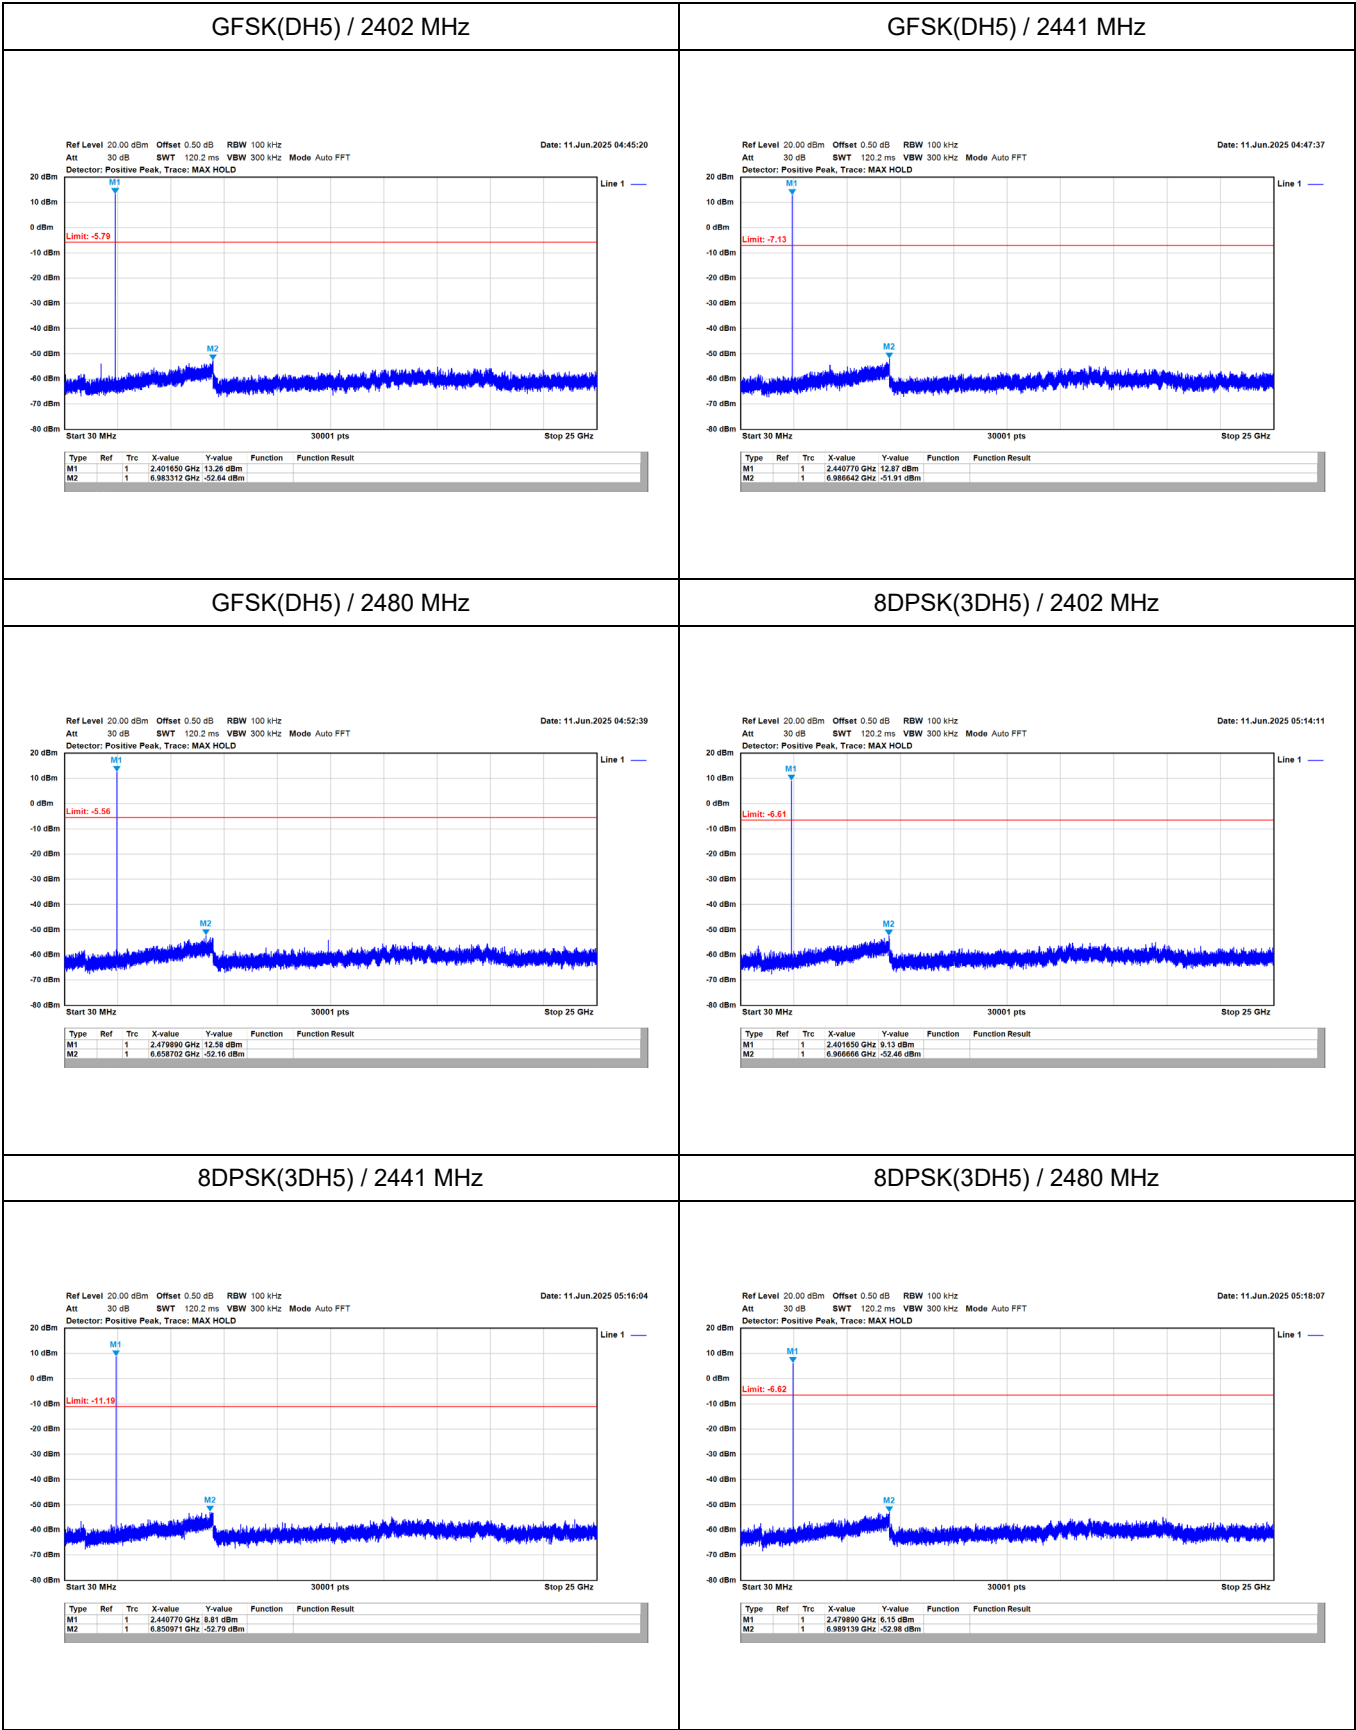


GFSK(DH5) (Band Edge) / 2402 MHz

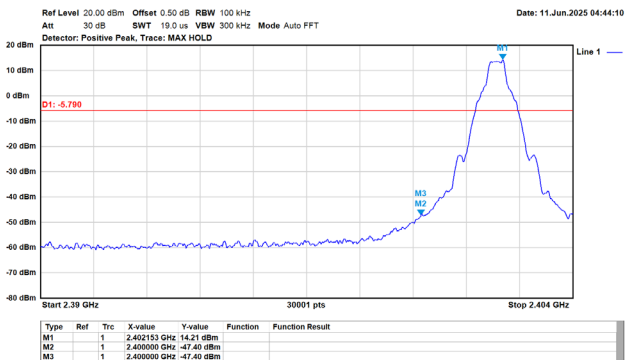


GFSK(DH5) (Band Edge) / 2480 MHz

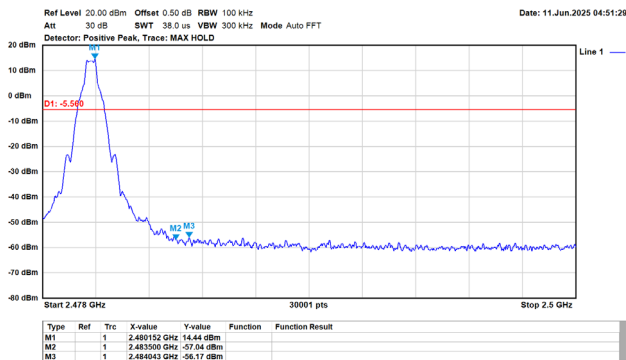


8DPSK(3DH5) (Band Edge) / 2402 MHz

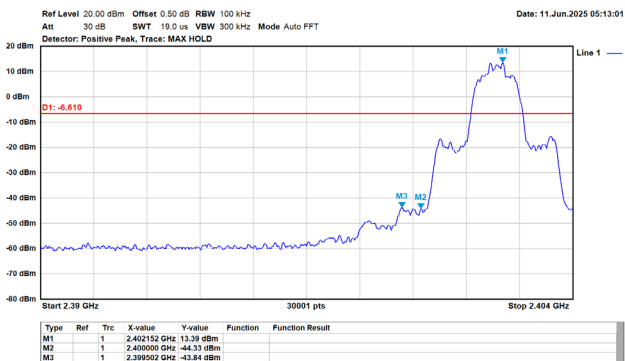


8DPSK(3DH5) (Band Edge) / 2480 MHz

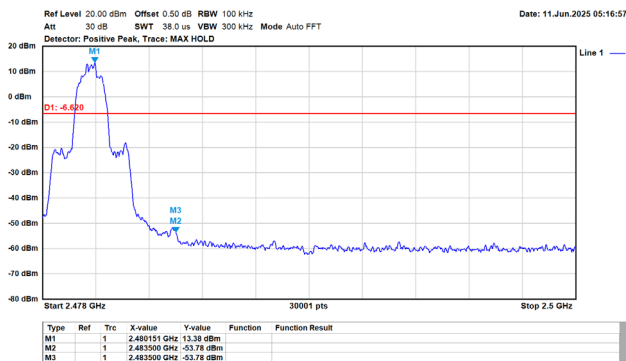


GFSK(DH5) (Band Edge Hopping) / 2402 MHz

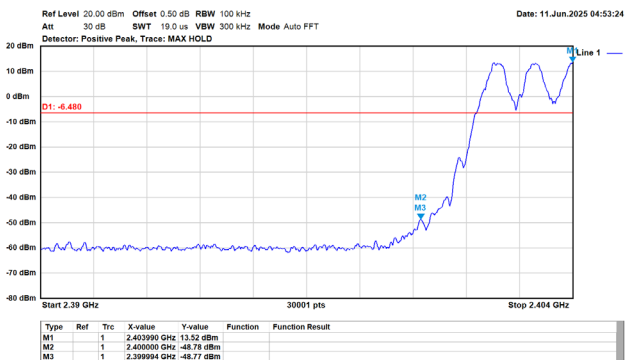


GFSK(DH5) (Band Edge Hopping) / 2480 MHz

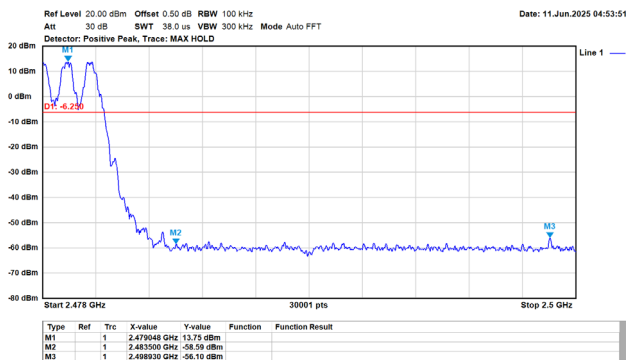

8DPSK(3DH5) (Band Edge Hopping) / 2402 MHz

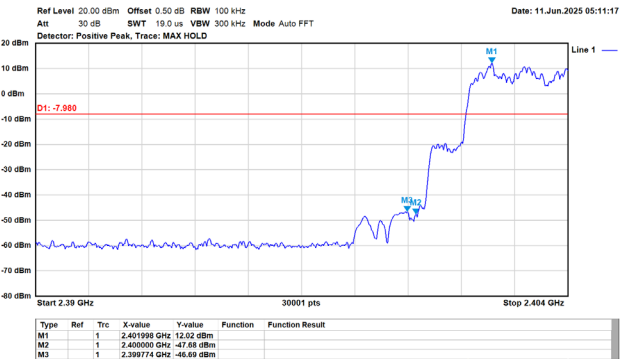


8DPSK(3DH5) (Band Edge Hopping) / 2480 MHz

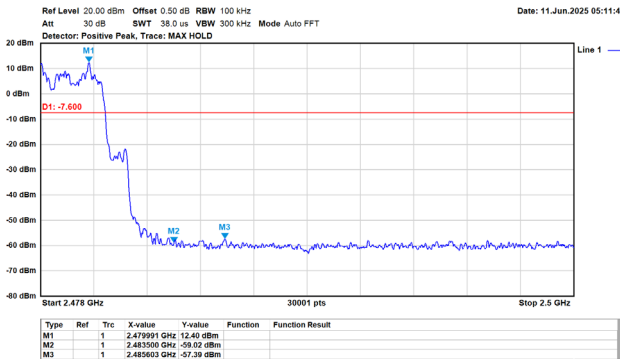

Appendix H. Test Result of Radiated Emission

Site :HY-CB03
 Condition :3m ,Horizontal
 Mode :TX_BT1M_2402MHz
 Test BY :Bob

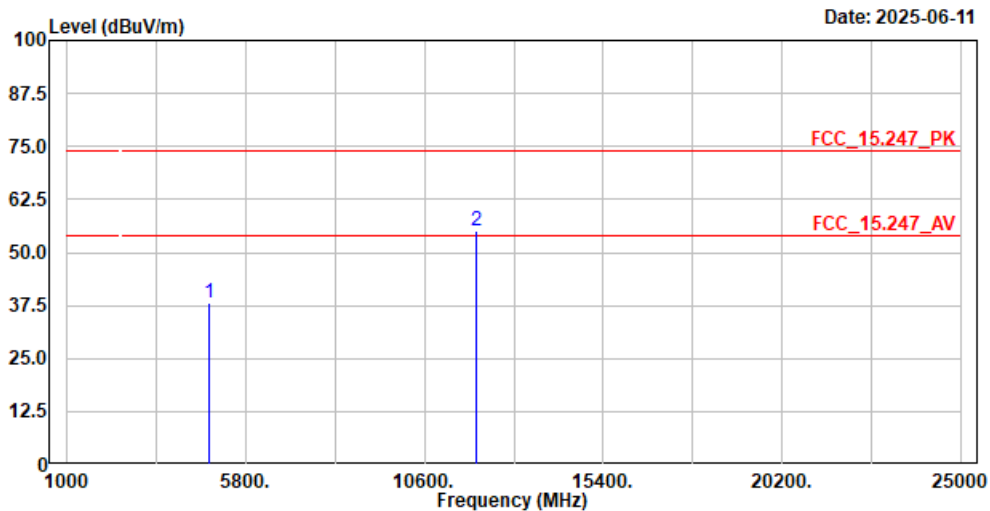

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4804.000	38.22	74.00	-35.78	53.17	-14.95	Peak
2	12010.000	55.28	74.00	-18.72	56.55	-1.27	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Horizontal-Average Detector:

Frequency (MHz)	Peak Measurement (dBuV/m)	Duty Cycle Factor (dB)	Measurement Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)
12010	55.28	-30.755	24.525	-29.475	54.000

Site :HY-CB03
 Condition :3m ,Vertical
 Mode :TX_BT1M_2402MHz
 Test BY :Bob

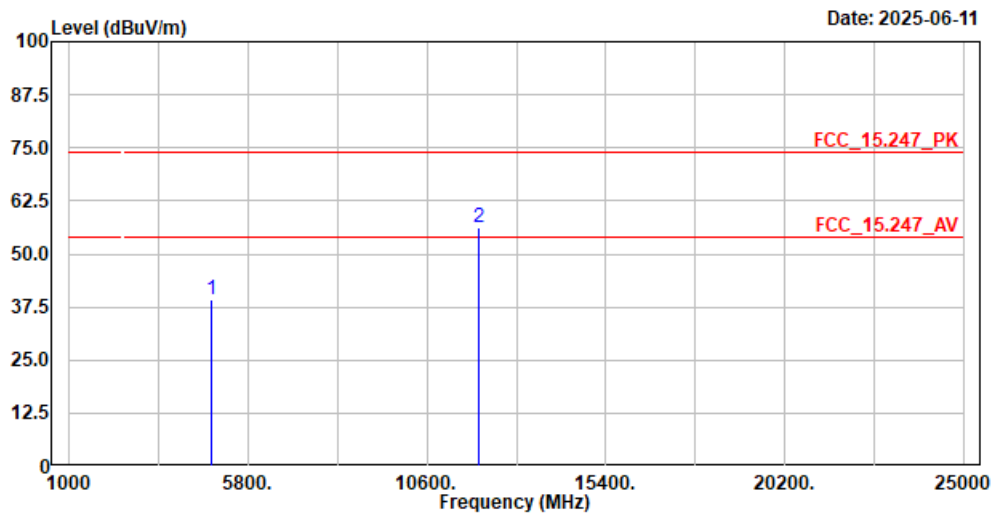

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4804.000	39.12	74.00	-34.88	54.07	-14.95	Peak
2	12010.000	56.23	74.00	-17.77	57.50	-1.27	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical-Average Detector:

Frequency (MHz)	Peak Measurement (dBuV/m)	Duty Cycle Factor (dB)	Measurement Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)
12010	56.23	-30.755	25.475	-28.525	54.000

Site :HY-CB03
 Condition :3m ,Horizontal
 Mode :TX_BT1M_2441MHz
 Test BY :Bob

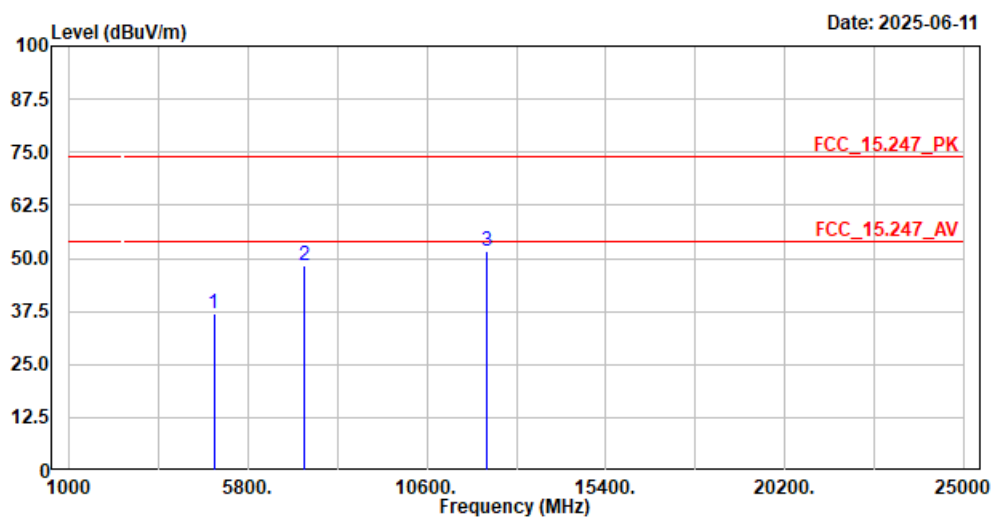

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4882.000	37.01	74.00	-36.99	51.58	-14.57	Peak
2	7323.000	48.40	74.00	-25.60	55.32	-6.92	Peak
3	12205.000	51.83	74.00	-22.17	53.03	-1.20	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Horizontal-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
--	--	--	--	--	--

Site :HY-CB03
 Condition :3m ,Vertical
 Mode :TX_BT1M_2441MHz
 Test BY :Bob

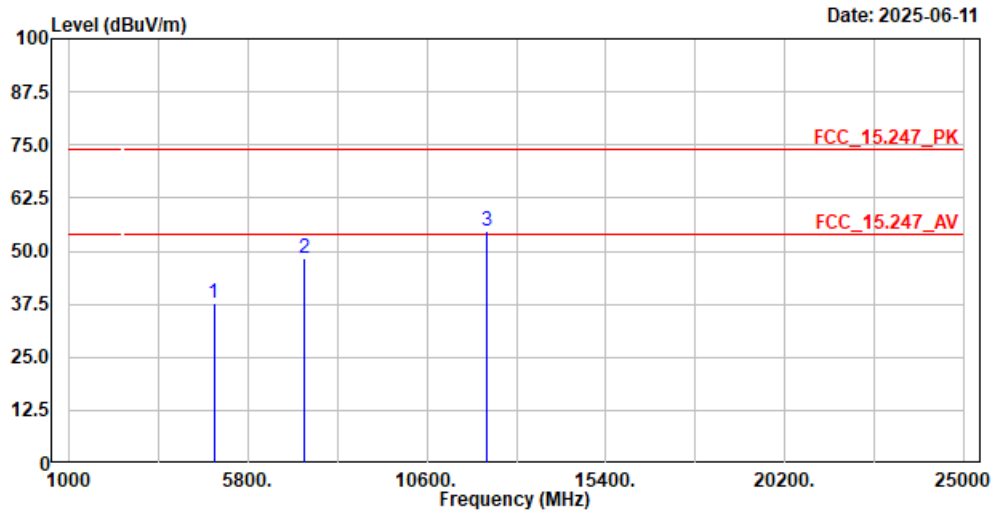

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4882.000	37.75	74.00	-36.25	52.32	-14.57	Peak
2	7323.000	48.38	74.00	-25.62	55.30	-6.92	Peak
3	12205.000	54.58	74.00	-19.42	55.78	-1.20	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical-Average Detector:

Frequency (MHz)	Peak Measurement (dBuV/m)	Duty Cycle Factor (dB)	Measurement Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)
12205	54.58	-30.755	23.825	-30.175	54.000

Site :HY-CB03
 Condition :3m ,Horizontal
 Mode :TX_BT1M_2480MHz
 Test BY :Bob

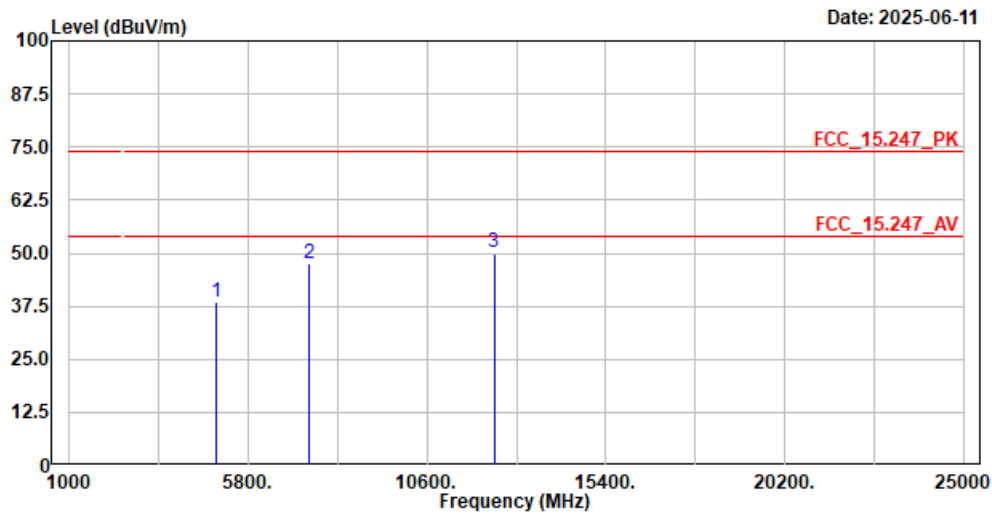

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4960.000	38.60	74.00	-35.40	52.82	-14.22	Peak
2	7440.000	47.40	74.00	-26.60	54.41	-7.01	Peak
3	12400.000	50.00	74.00	-24.00	50.80	-0.80	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Horizontal-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
--	--	--	--	--	--

Site :HY-CB03
 Condition :3m ,Vertical
 Mode :TX_BT1M_2480MHz
 Test BY :Bob

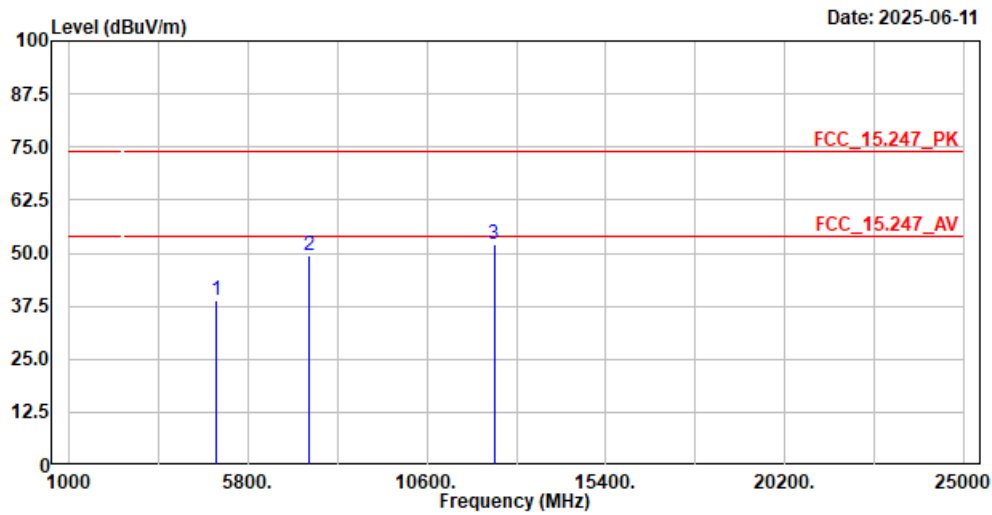

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4960.000	38.69	74.00	-35.31	52.91	-14.22	Peak
2	7440.000	49.48	74.00	-24.52	56.49	-7.01	Peak
3	12400.000	52.10	74.00	-21.90	52.90	-0.80	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical-Average Detector:

Frequency (MHz)	Peak Measurement (dBuV/m)	Duty Cycle Factor (dB)	Measurement Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)
--	--	--	--	--	--

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BT3M_2402MHz
Test BY :Bob

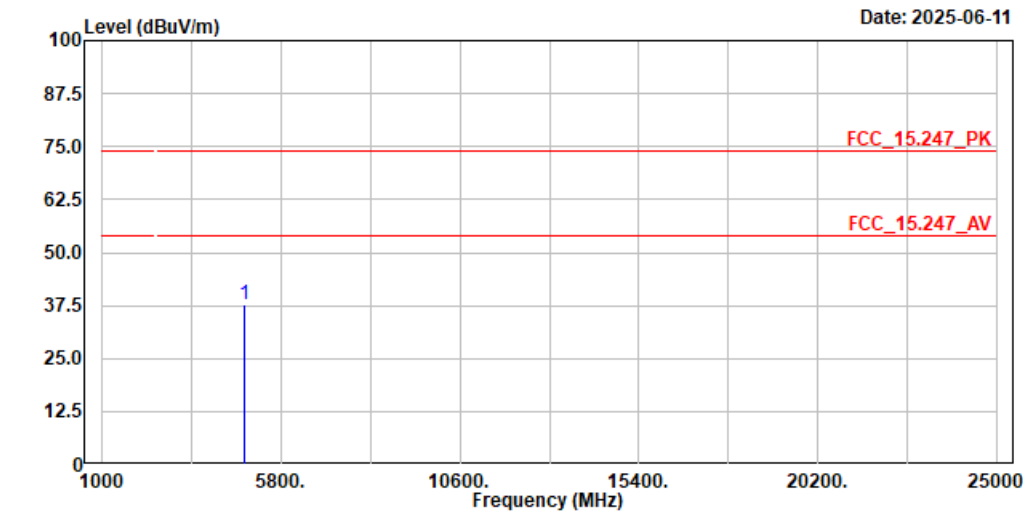

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark


	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4804.000	37.74	74.00	-36.26	52.69	-14.95	Peak

- Note:
1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Horizontal-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
--	--	--	--	--	--

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BT3M_2402MHz
Test BY :Bob

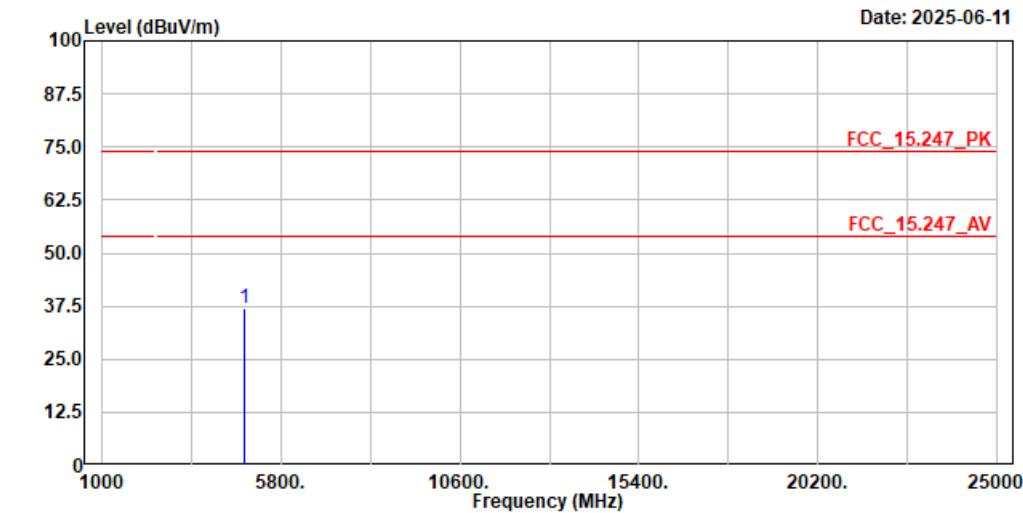

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4804.000	36.88	74.00	-37.12	51.83	-14.95	Peak

Note:

1. Level = Read Level + Factor

2. Factor = Antenna Factor + Cable Loss - Preamp Factor


3. Over Limit = Level - Limit Line

4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
--	--	--	--	--	--

Site :HY-CB03
 Condition :3m ,Horizontal
 Mode :TX_BT3M_2441MHz
 Test BY :Bob

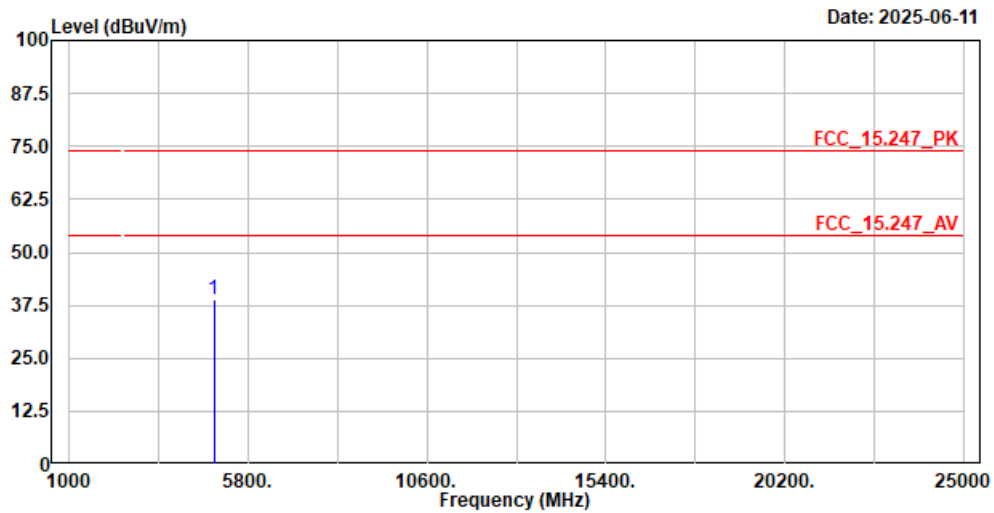

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4882.000	38.90	74.00	-35.10	53.47	-14.57	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Horizontal-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
--	--	--	--	--	--

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BT3M_2441MHz
Test BY :Bob

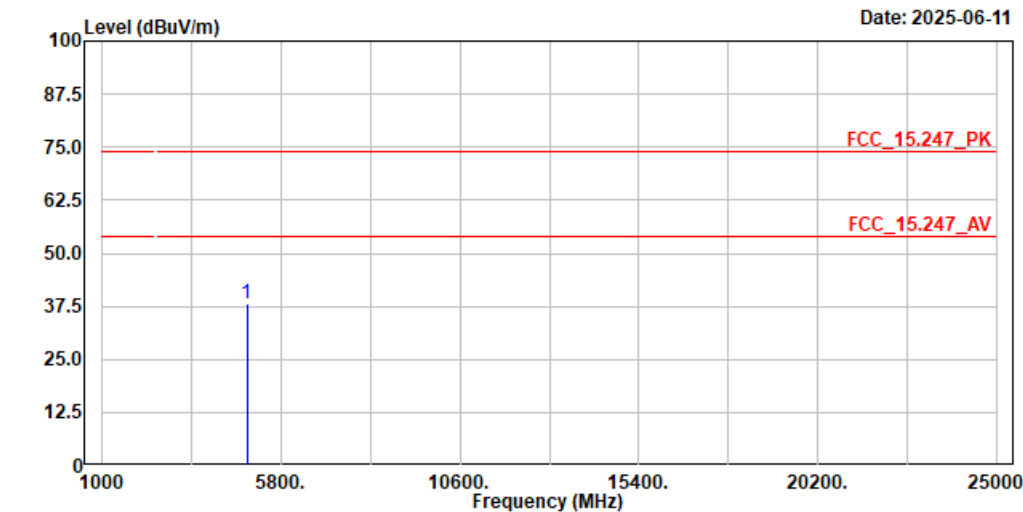

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4882.000	38.23	74.00	-35.77	52.80	-14.57	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
--	--	--	--	--	--

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BT3M_2480MHz
Test BY :Bob

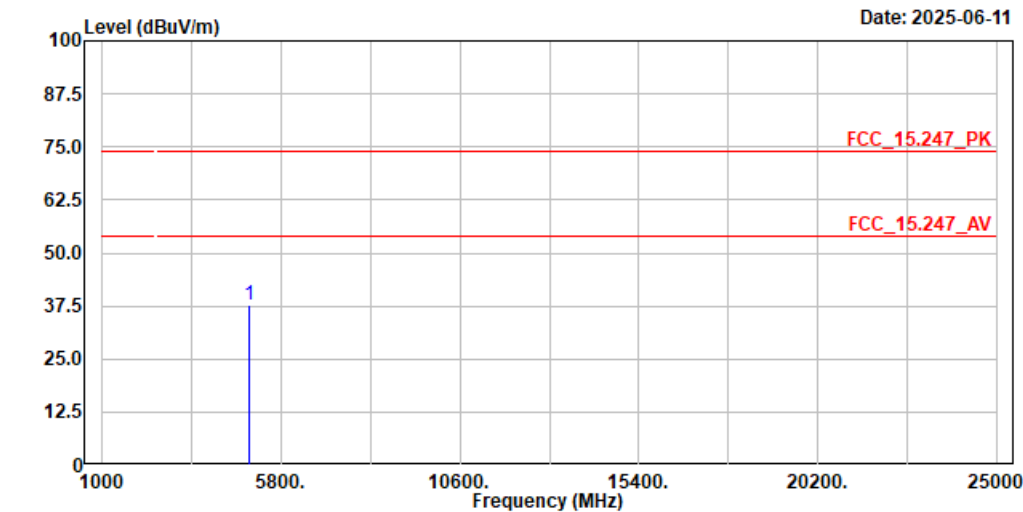

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark

	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4960.000	37.82	74.00	-36.18	52.04	-14.22	Peak

Note:

1. Level = Read Level + Factor

2. Factor = Antenna Factor + Cable Loss - Preamp Factor


3. Over Limit = Level - Limit Line

4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Horizontal-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
--	--	--	--	--	--

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BT3M_2480MHz
Test BY :Bob

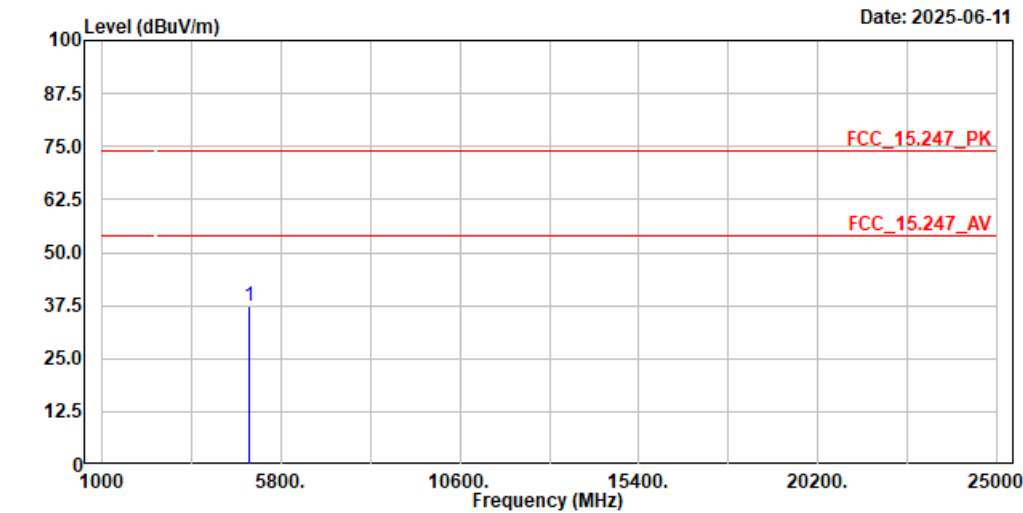


No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4960.000	37.46	74.00	-36.54	51.68	-14.22	Peak

- Note:
1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
--	--	--	--	--	--

Site :HY-CB03
 Condition :3m ,Horizontal
 Mode :TX_BT3M_2441MHz
 Test BY :Ashton

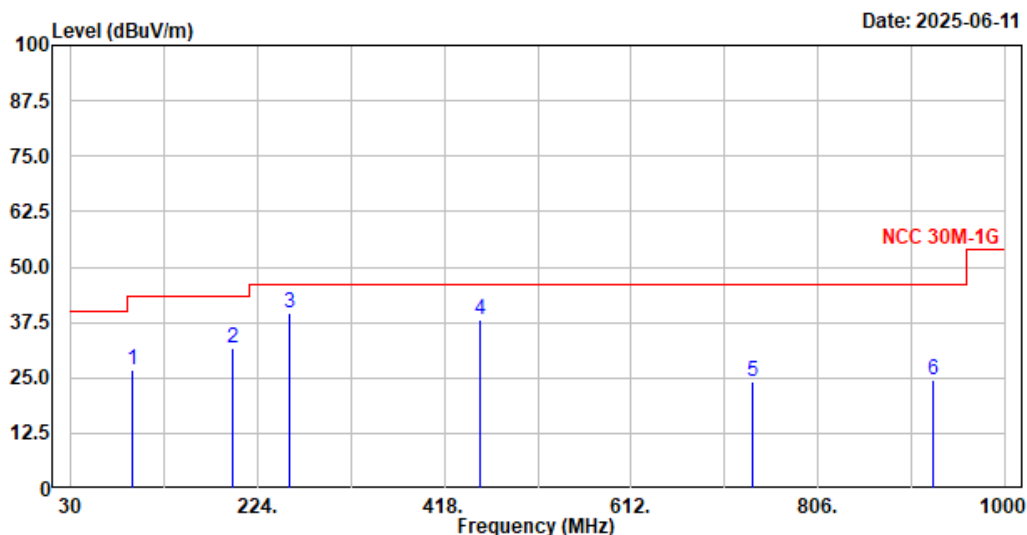


No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	94.020	26.61	43.50	-16.89	55.73	-29.12	QP
2	197.810	31.74	43.50	-11.76	58.59	-26.85	QP
3	256.980	39.60	46.00	-6.40	64.34	-24.74	QP
4	454.860	38.13	46.00	-7.87	56.85	-18.72	QP
5	738.100	24.02	46.00	-21.98	37.29	-13.27	QP
6	926.280	24.62	46.00	-21.38	35.52	-10.90	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB03
 Condition :3m ,Vertical
 Mode :TX_BT3M_2441MHz
 Test BY :Ashton

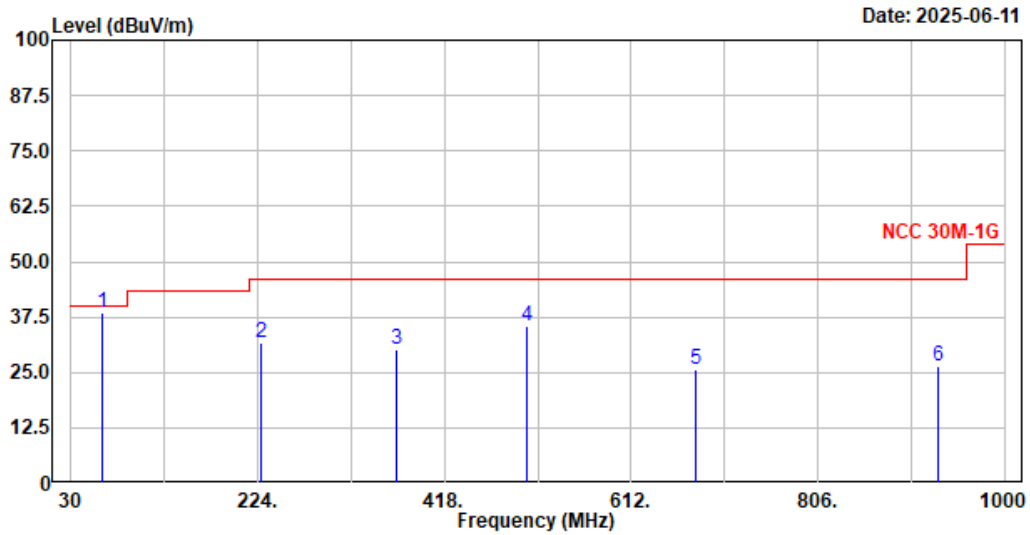


No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	62.010	38.55	40.00	-1.45	63.51	-24.96	QP
2	226.910	31.57	46.00	-14.43	57.69	-26.12	QP
3	367.560	30.02	46.00	-15.98	51.43	-21.41	QP
4	503.360	35.33	46.00	-10.67	53.26	-17.93	QP
5	679.900	25.64	46.00	-20.36	40.16	-14.52	QP
6	930.160	26.26	46.00	-19.74	37.17	-10.91	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB03
 Condition :3m ,Horizontal
 Mode :TX_BT1M_2402MHz
 Test BY :Bob

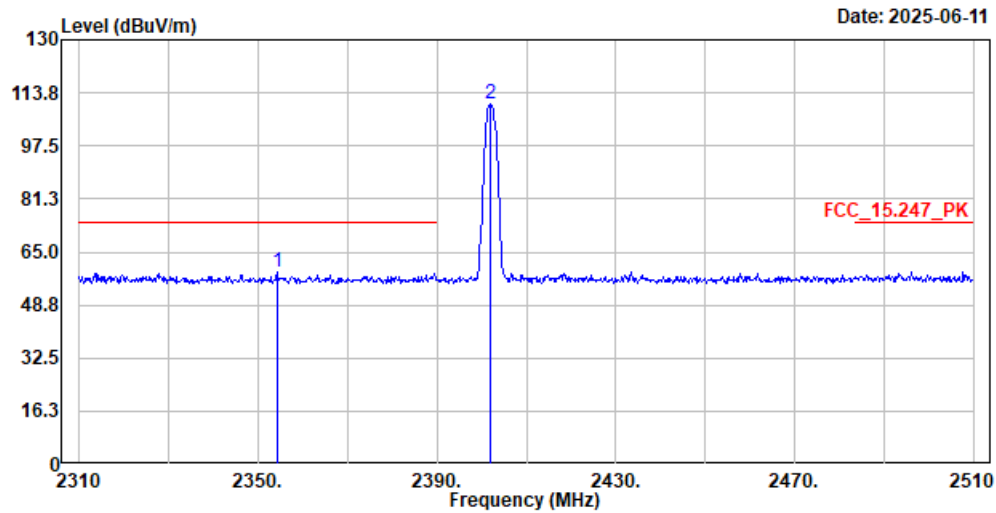

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2354.200	58.83	74.00	-15.17	28.41	30.42	Peak
2	2401.800	110.14	-----	-----	79.68	30.46	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Horizontal-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
2354.2	58.83	-30.755	28.075	-25.925	54.000
2401.8	110.14	-30.755	79.385	--	--

Site :HY-CB03
 Condition :3m ,Vertical
 Mode :TX_BT1M_2402MHz
 Test BY :Bob

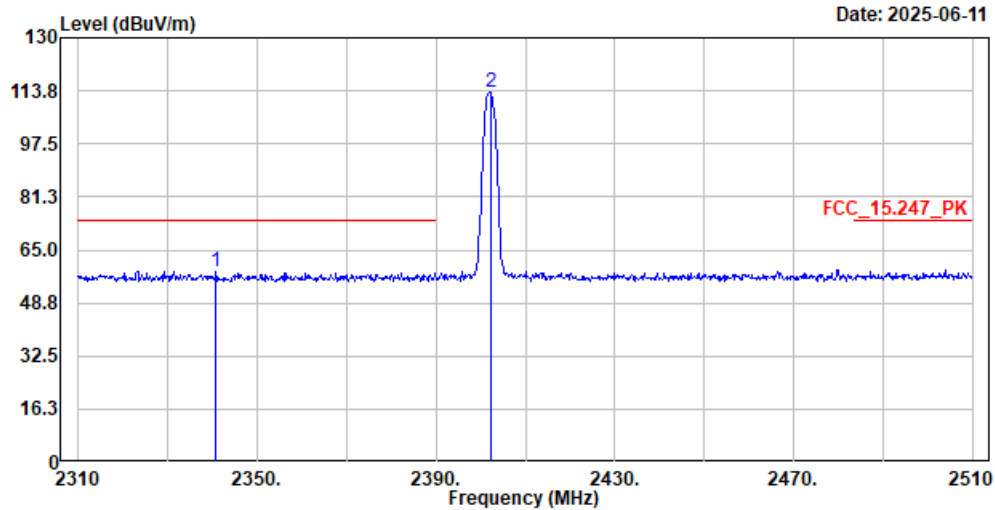

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2340.800	58.57	74.00	-15.43	28.15	30.42	Peak
2	2402.200	113.25	-----	-----	82.79	30.46	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
2340.8	58.57	-30.755	27.815	-26.185	54.000
2402.2	113.25	-30.755	82.495	--	--

Site :HY-CB03
 Condition :3m ,Horizontal
 Mode :TX_BT1M_2480MHz
 Test BY :Bob

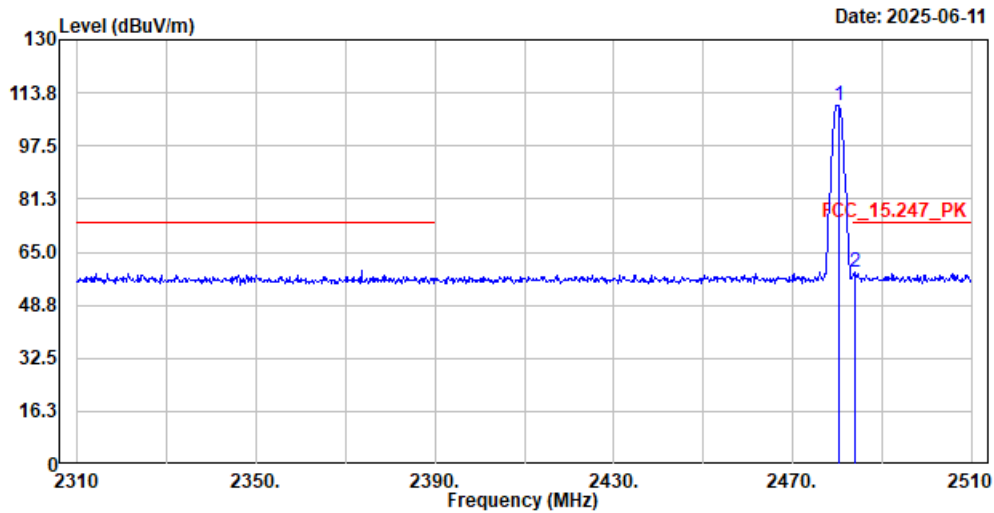

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
				dB	dBuV		
1	2480.200	109.70	-----	-----	79.31	30.39	Peak
2	2483.800	58.69	74.00	-15.31	28.25	30.44	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Horizontal-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
2480.2	109.70	-30.755	78.945	--	--
2483.8	58.69	-30.755	27.935	-26.065	54.000

Site :HY-CB03
 Condition :3m ,Vertical
 Mode :TX_BT1M_2480MHz
 Test BY :Bob

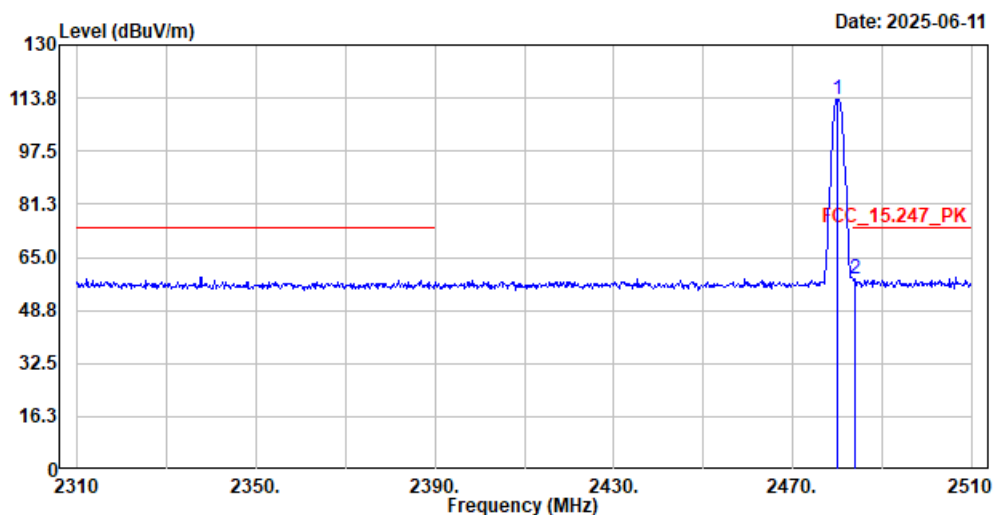

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2480.000	113.29	-----	-----	82.90	30.39	Peak
2	2484.000	58.40	74.00	-15.60	27.96	30.44	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
2480.0	113.29	-30.755	82.535	--	--
2484.0	58.40	-30.755	27.645	-26.355	54.000

Site :HY-CB03
 Condition :3m ,Horizontal
 Mode :TX_BT3M_2402MHz
 Test BY :Bob

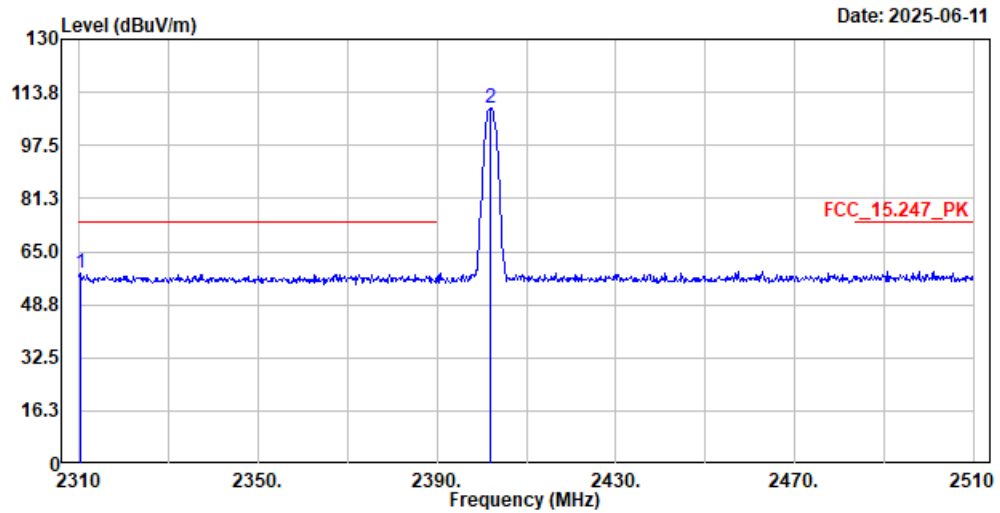

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2310.200	58.14	74.00	-15.86	27.53	30.61	Peak
2	2402.000	109.00	-----	-----	78.54	30.46	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Horizontal-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
2310.2	58.14	-30.755	27.385	-26.615	54.000
2402.0	109.00	-30.755	78.245	--	--

Site :HY-CB03
 Condition :3m ,Vertical
 Mode :TX_BT3M_2402MHz
 Test BY :Bob

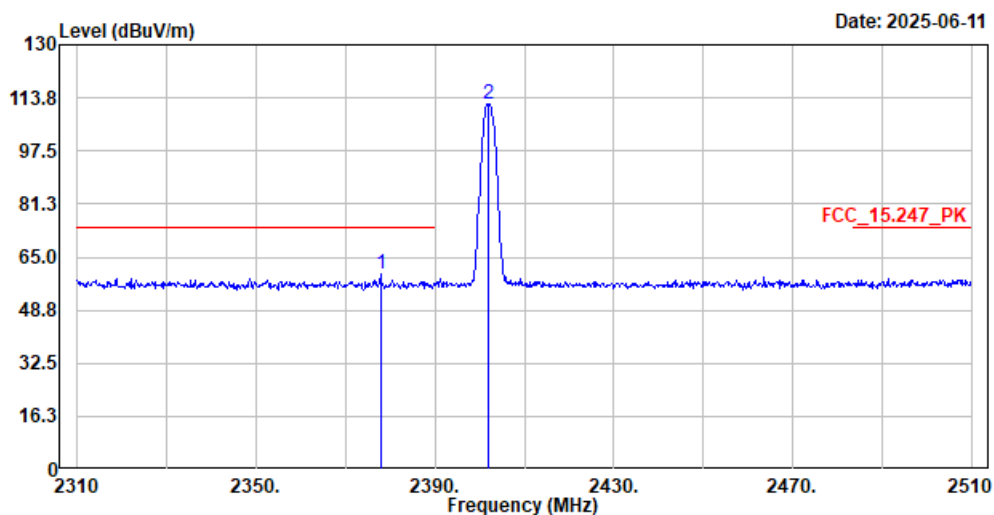

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB/m	
1	2377.800	60.02	74.00	-13.98	29.59	30.43	Peak
2	2402.000	112.05	-----	-----	81.59	30.46	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical-Average Detector:

Frequency (MHz)	Peak Measurement (dBuV/m)	Duty Cycle Factor (dB)	Measurement Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)
2377.8	60.02	-30.755	29.265	-24.735	54.000
2402.0	112.05	-30.755	81.295	--	--

Site :HY-CB03
 Condition :3m ,Horizontal
 Mode :TX_BT3M_2480MHz
 Test BY :Bob

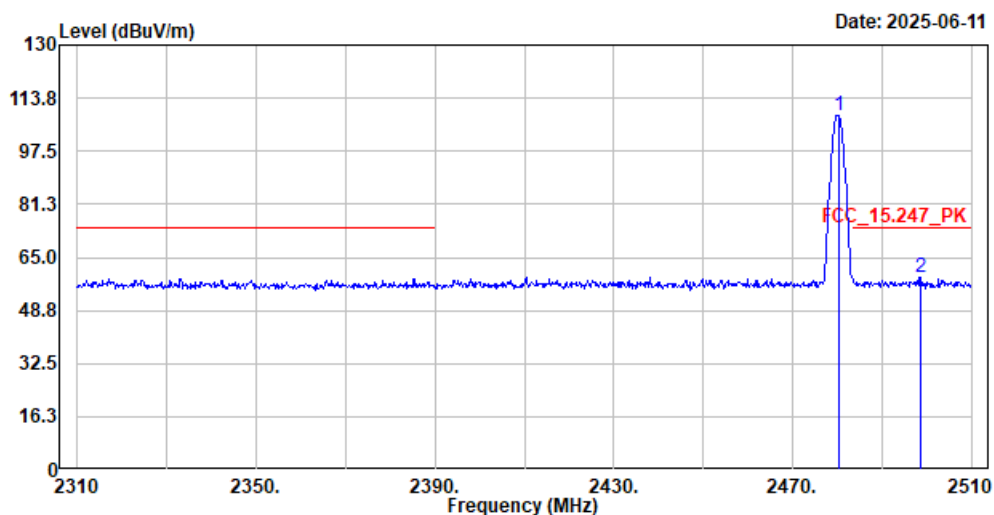

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2480.200	108.29	-----	-----	77.90	30.39	Peak
2	2498.600	58.90	74.00	-15.10	28.39	30.51	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Horizontal-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
2480.2	108.29	-30.755	77.535	--	--
2498.6	58.90	-30.755	28.145	-25.855	54.000

Site :HY-CB03
 Condition :3m ,Vertical
 Mode :TX_BT3M_2480MHz
 Test BY :Bob

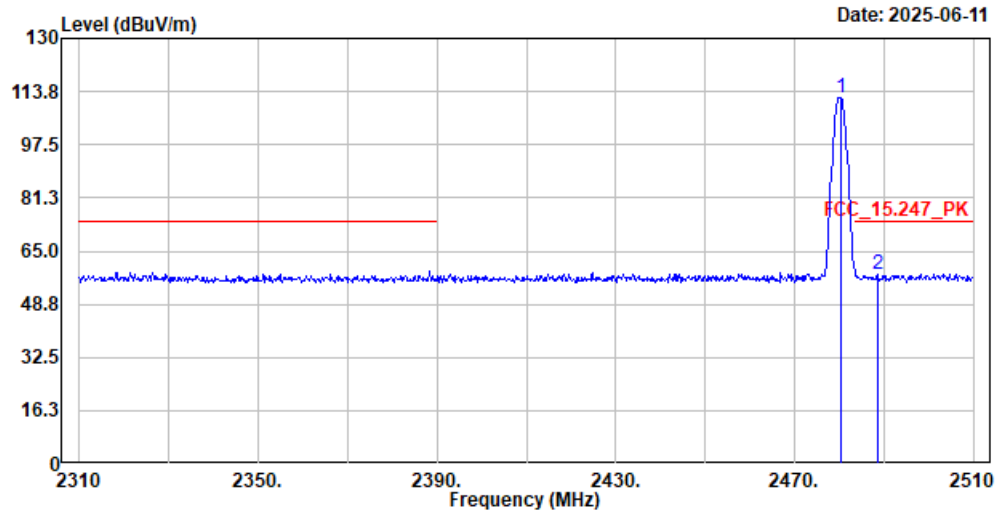

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2480.200	111.84	-----	-----	81.45	30.39	Peak
2	2488.600	57.93	74.00	-16.07	27.44	30.49	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
2480.2	111.84	-30.755	81.085	--	--
2488.6	57.93	-30.755	27.175	-26.825	54.000