



Bluetooth LE Audio



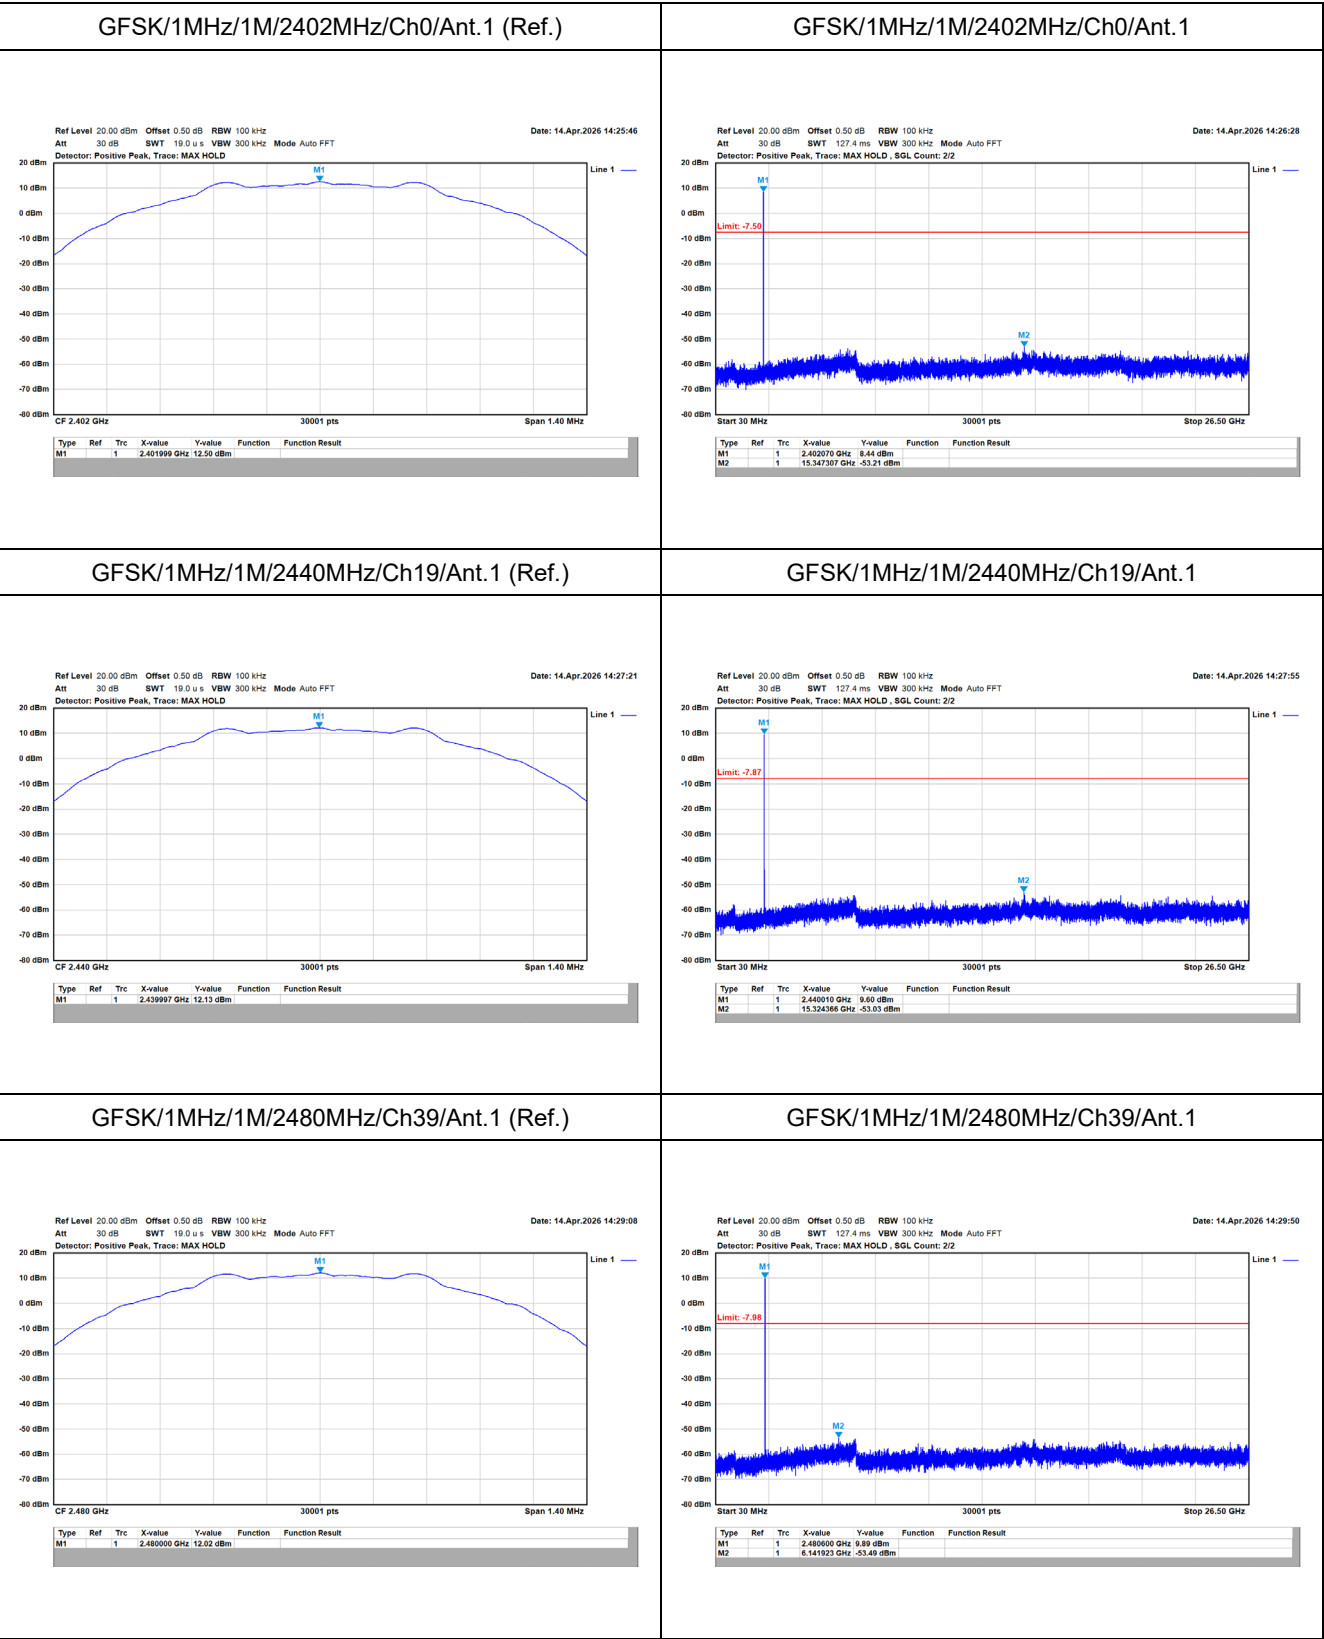

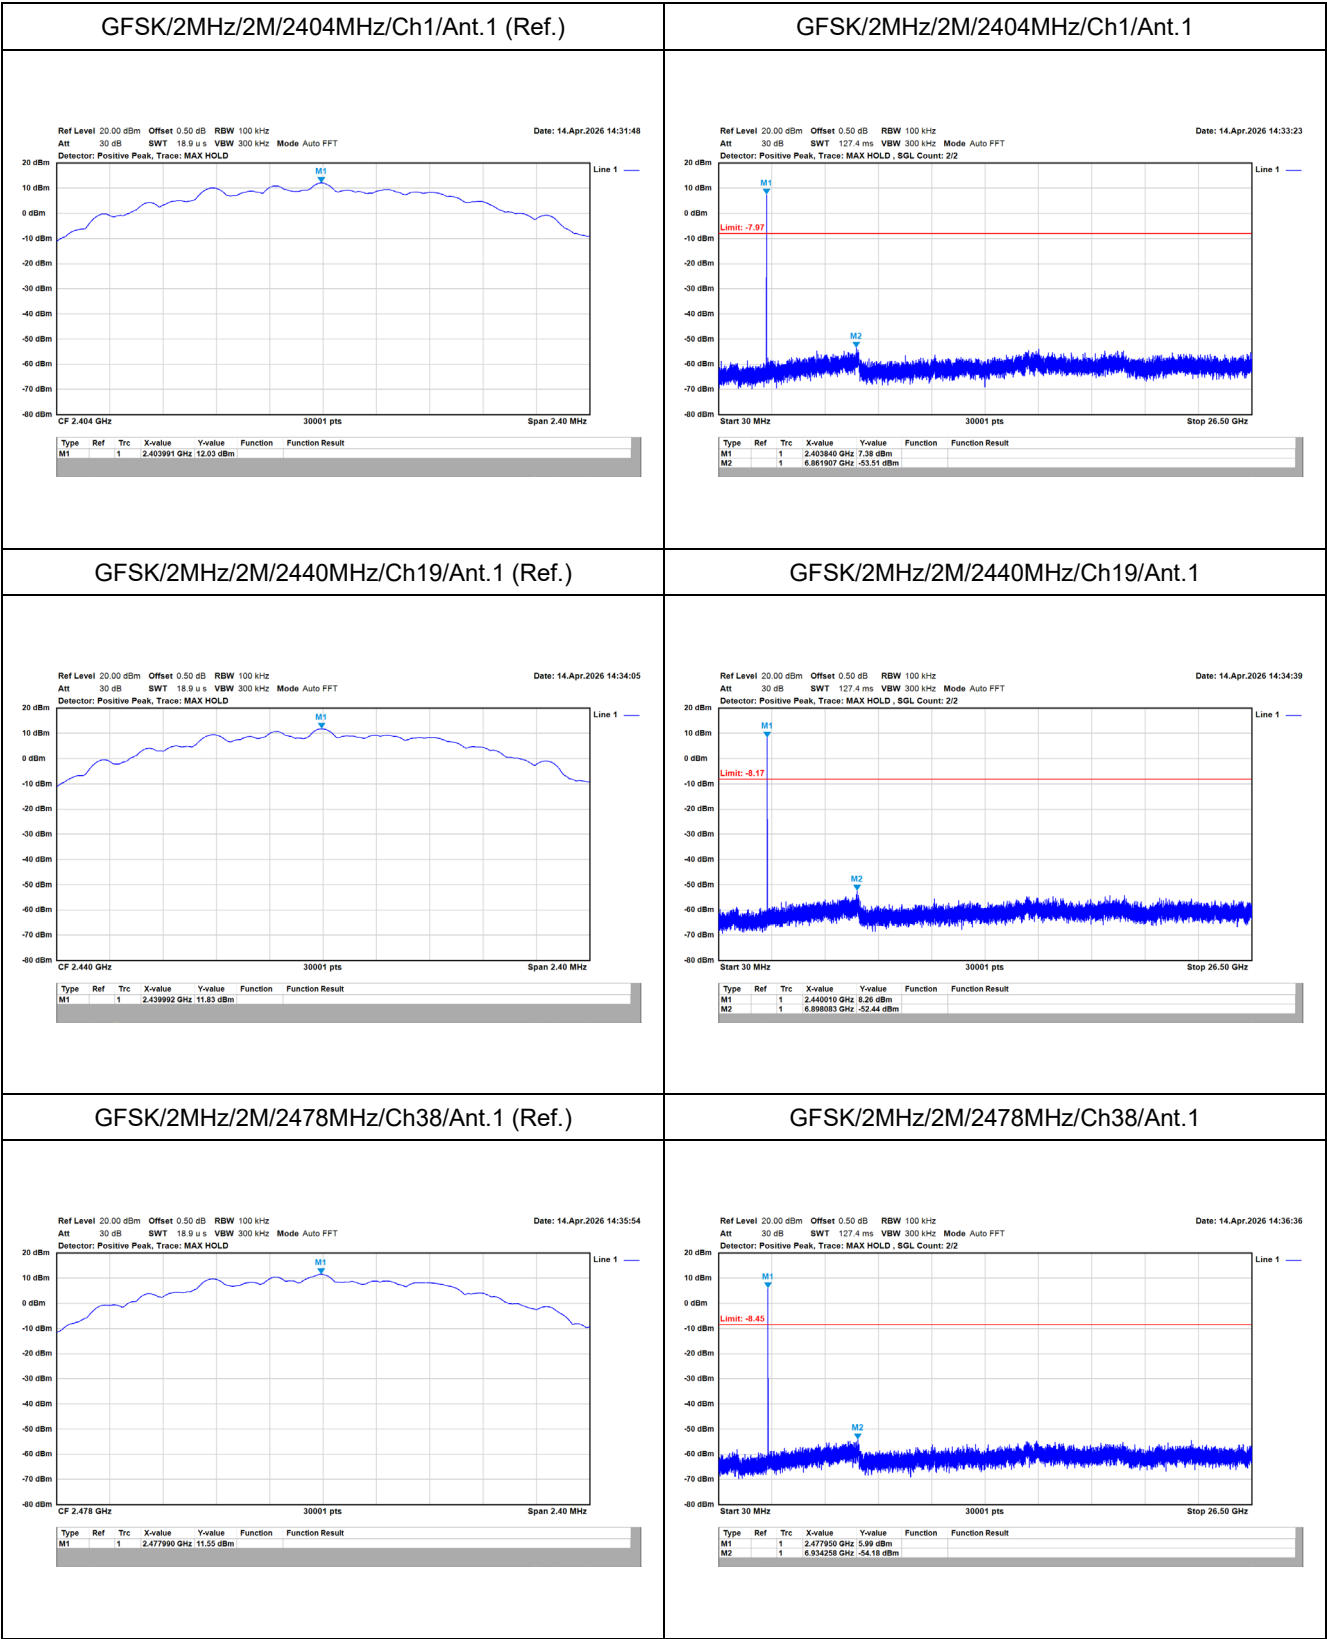


Appendix F. Test Result of Radiated Emission

Bluetooth LE

TX_BLE1M_2402MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE1M_2402MHz
Test BY :Rock

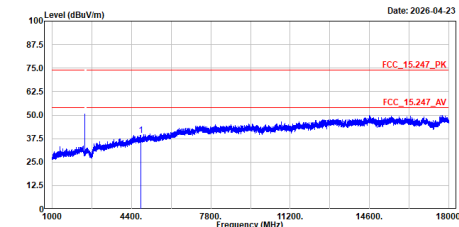


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4884.000	39.12	74.00	-34.88	53.87	-14.75	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2402MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE1M_2402MHz
Test BY :Rock

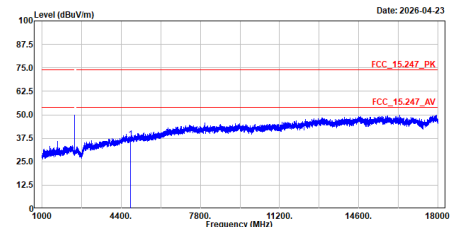


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4884.000	36.92	74.00	-37.08	51.67	-14.75	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2440MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE1M_2440MHz
Test BY :Rock

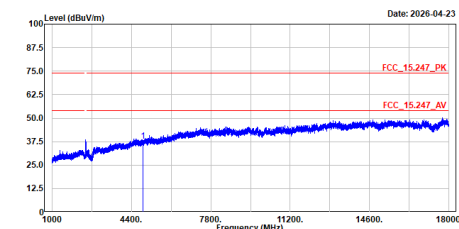


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4880.000	37.68	74.00	-36.32	52.16	-14.48	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2440MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE1M_2440MHz
Test BY :Rock

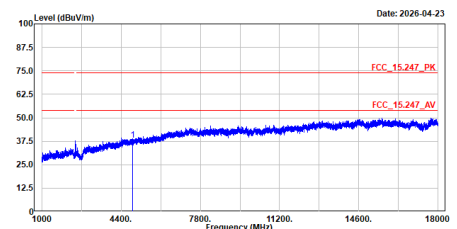


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4880.000	38.27	74.00	-35.73	52.75	-14.48	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2480MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE1M_2480MHz
Test BY :Rock

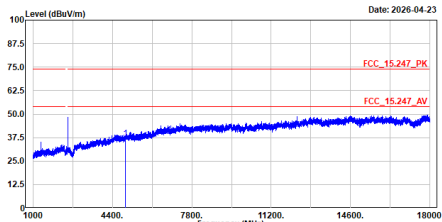


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4968.000	37.00	74.00	-37.00	51.12	-14.12	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2480MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE1M_2480MHz
Test BY :Rock

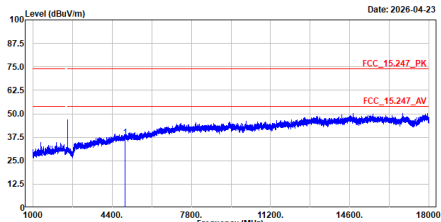


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4968.000	37.45	74.00	-36.55	51.57	-14.12	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2404MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE2M_2404MHz
Test BY :Rock

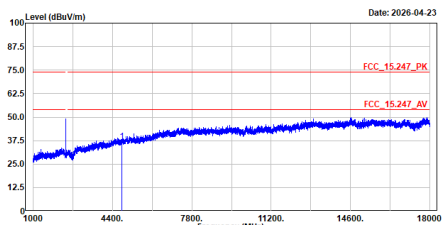


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4888.000	37.14	74.00	-36.86	51.89	-14.75	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.





TX_BLE2M_2404MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE2M_2404MHz
Test BY :Rock

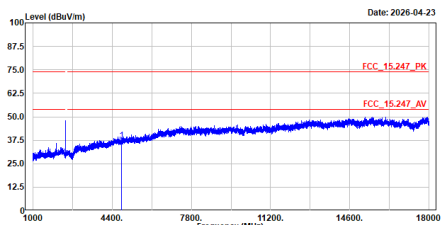

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4888.000	37.24	74.00	-36.76	51.99	-14.75	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

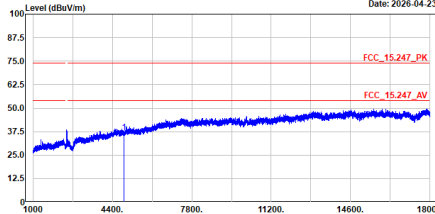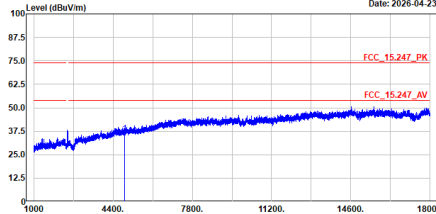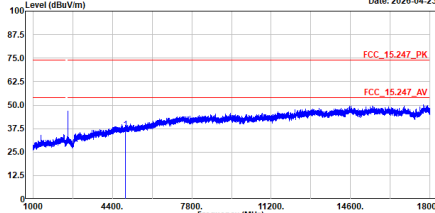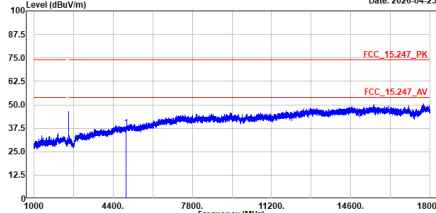TX_BLE2M_2440MHz_H Site :HY-CB03 Condition :3m ,Horizontal Mode :TX_BLE2M_2440MHz Test BY :Rock Level (dBuV/m) Date: 2026-04-23  <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>4880.000</td><td>36.85</td><td>74.00</td><td>-37.15</td><td>51.33</td><td>-14.48</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	4880.000	36.85	74.00	-37.15	51.33	-14.48	Peak	TX_BLE2M_2440MHz_V Site :HY-CB03 Condition :3m ,Vertical Mode :TX_BLE2M_2440MHz Test BY :Rock Level (dBuV/m) Date: 2026-04-23  <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>4880.000</td><td>36.26</td><td>74.00</td><td>-37.74</td><td>50.74</td><td>-14.48</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	4880.000	36.26	74.00	-37.74	50.74	-14.48	Peak
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																											
1	4880.000	36.85	74.00	-37.15	51.33	-14.48	Peak																																										
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																											
1	4880.000	36.26	74.00	-37.74	50.74	-14.48	Peak																																										
TX_BLE2M_2478MHz_H Site :HY-CB03 Condition :3m ,Horizontal Mode :TX_BLE2M_2478MHz Test BY :Rock Level (dBuV/m) Date: 2026-04-23  <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>4956.000</td><td>36.82</td><td>74.00</td><td>-37.18</td><td>50.96</td><td>-14.14</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	4956.000	36.82	74.00	-37.18	50.96	-14.14	Peak	TX_BLE2M_2478MHz_V Site :HY-CB03 Condition :3m ,Vertical Mode :TX_BLE2M_2478MHz Test BY :Rock Level (dBuV/m) Date: 2026-04-23  <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>4956.000</td><td>37.56</td><td>74.00</td><td>-36.44</td><td>51.70</td><td>-14.14</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	4956.000	37.56	74.00	-36.44	51.70	-14.14	Peak
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																											
1	4956.000	36.82	74.00	-37.18	50.96	-14.14	Peak																																										
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																											
1	4956.000	37.56	74.00	-36.44	51.70	-14.14	Peak																																										

TX_BLE2M_2440MHz_H_QP

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE2M_2440MHz
Test BY :Rock

Level (dBuV/m)

Date: 2026-04-24

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	54.153	27.39	40.00	-12.61	50.98	-23.59	QP
2	146.497	30.09	43.50	-13.41	54.00	-23.91	QP
3	193.639	31.51	43.50	-11.99	58.22	-26.71	QP
4	348.354	28.50	46.00	-17.50	50.47	-21.97	QP
5	670.200	25.74	46.00	-22.26	38.48	-14.74	QP
6	841.502	29.85	46.00	-16.15	42.07	-12.22	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_BLE2M_2440MHz_V_QP

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE2M_2440MHz
Test BY :Rock

Level (dBuV/m)

Date: 2026-04-24


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	56.093	36.16	40.00	-3.84	59.91	-23.75	QP
2	135.148	33.96	43.50	-9.54	58.67	-24.71	QP
3	192.184	30.24	43.50	-13.26	56.80	-26.56	QP
4	405.002	26.32	46.00	-19.68	46.70	-20.38	QP
5	742.502	28.67	46.00	-17.33	41.80	-13.13	QP
6	841.502	30.57	46.00	-15.43	42.79	-12.22	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_BLE1M_2402MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE1M_2402MHz
Test BY :Rock

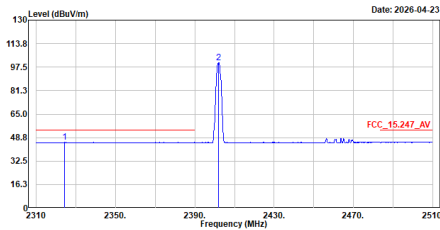


No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2324.400	45.53	54.00	-8.47	14.96	30.57	Average
2	2402.000	100.77		----	70.30	30.47	Average

Note:

1. $\text{Level} = \text{Read Level} + \text{Factor}$
2. $\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Preamp Factor}$
3. $\text{Over Limit} = \text{Level} - \text{Limit Line}$
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2402MHz_H_Peak

```
Site      :HY-CB03
Condition :3m      ,Horizontal
Mode      :TX_BLE1M_2402MHz
Test BY   :Rock
```

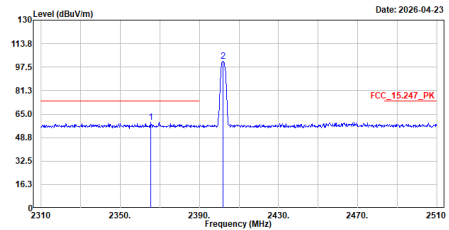


No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2365.600	59.42	74.00	-14.58	28.94	30.48	Peak
2	2402.000	101.31			70.84	30.47	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2402MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE1M_2402MHz
Test BY :Rock

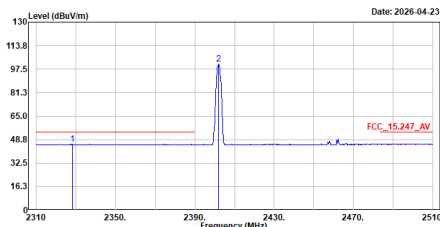


No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2328.200	45.60	54.00	-8.40	15.03	30.57	Average
2	2402.000	100.87			70.40	30.47	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2402MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE1M_2402MHz
Test BY :Rock

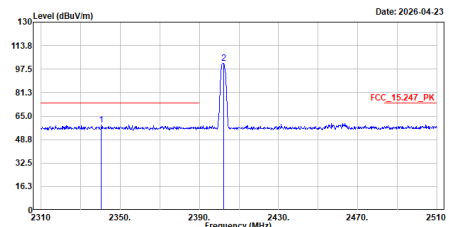

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2340.400	58.92	74.00	-15.08	28.45	30.47	Peak
2	2402.200	101.41	-----	-----	70.94	30.47	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


TX_BLE2M_2404MHz_H_Average Site :HY-CB03 Condition :3m ,Horizontal Mode :TX_BLE2M_2404MHz Test BY :Rock Level (dBuV/m) 113.8 97.5 81.3 65.0 48.8 32.5 16.3 0 Frequency (MHz) 2310 2350 2390 2430 2470 2510 113.8 97.5 81.3 65.0 48.8 32.5 16.3 0 2310 2350 2390 2430 2470 2510 1 2 FCC_15.247_AV <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>2385.000</td><td>45.73</td><td>54.00</td><td>-8.27</td><td>15.24</td><td>30.49</td><td>Average</td></tr><tr><td>2</td><td>2404.000</td><td>99.46</td><td>-----</td><td>-----</td><td>69.01</td><td>30.45</td><td>Average</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	2385.000	45.73	54.00	-8.27	15.24	30.49	Average	2	2404.000	99.46	-----	-----	69.01	30.45	Average	TX_BLE2M_2404MHz_H_Peak Site :HY-CB03 Condition :3m ,Horizontal Mode :TX_BLE2M_2404MHz Test BY :Rock Level (dBuV/m) 113.8 97.5 81.3 65.0 48.8 32.5 16.3 0 Frequency (MHz) 2310 2350 2390 2430 2470 2510 113.8 97.5 81.3 65.0 48.8 32.5 16.3 0 2310 2350 2390 2430 2470 2510 1 2 FCC_15.247_PK <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>2353.600</td><td>58.71</td><td>74.00</td><td>-15.29</td><td>28.17</td><td>30.54</td><td>Peak</td></tr><tr><td>2</td><td>2403.600</td><td>101.20</td><td>-----</td><td>-----</td><td>70.75</td><td>30.45</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	2353.600	58.71	74.00	-15.29	28.17	30.54	Peak	2	2403.600	101.20	-----	-----	70.75	30.45	Peak
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																											
1	2385.000	45.73	54.00	-8.27	15.24	30.49	Average																																																										
2	2404.000	99.46	-----	-----	69.01	30.45	Average																																																										
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																											
1	2353.600	58.71	74.00	-15.29	28.17	30.54	Peak																																																										
2	2403.600	101.20	-----	-----	70.75	30.45	Peak																																																										
TX_BLE2M_2404MHz_V_Average Site :HY-CB03 Condition :3m ,Vertical Mode :TX_BLE2M_2404MHz Test BY :Rock Level (dBuV/m) 113.8 97.5 81.3 65.0 48.8 32.5 16.3 0 Frequency (MHz) 2310 2350 2390 2430 2470 2510 113.8 97.5 81.3 65.0 48.8 32.5 16.3 0 2310 2350 2390 2430 2470 2510 1 2 FCC_15.247_AV <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>2335.000</td><td>45.79</td><td>54.00</td><td>-8.21</td><td>15.27</td><td>30.52</td><td>Average</td></tr><tr><td>2</td><td>2404.000</td><td>99.51</td><td>-----</td><td>-----</td><td>69.06</td><td>30.45</td><td>Average</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	2335.000	45.79	54.00	-8.21	15.27	30.52	Average	2	2404.000	99.51	-----	-----	69.06	30.45	Average	TX_BLE2M_2404MHz_V_Peak Site :HY-CB03 Condition :3m ,Vertical Mode :TX_BLE2M_2404MHz Test BY :Rock Level (dBuV/m) 113.8 97.5 81.3 65.0 48.8 32.5 16.3 0 Frequency (MHz) 2310 2350 2390 2430 2470 2510 113.8 97.5 81.3 65.0 48.8 32.5 16.3 0 2310 2350 2390 2430 2470 2510 1 2 FCC_15.247_PK <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>2313.000</td><td>59.04</td><td>74.00</td><td>-14.96</td><td>28.55</td><td>30.49</td><td>Peak</td></tr><tr><td>2</td><td>2403.400</td><td>101.21</td><td>-----</td><td>-----</td><td>70.75</td><td>30.46</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	2313.000	59.04	74.00	-14.96	28.55	30.49	Peak	2	2403.400	101.21	-----	-----	70.75	30.46	Peak
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																											
1	2335.000	45.79	54.00	-8.21	15.27	30.52	Average																																																										
2	2404.000	99.51	-----	-----	69.06	30.45	Average																																																										
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																											
1	2313.000	59.04	74.00	-14.96	28.55	30.49	Peak																																																										
2	2403.400	101.21	-----	-----	70.75	30.46	Peak																																																										

TX_BLE2M_2478MHz_H_Average Site :HY-CB03 Condition :3m ,Horizontal Mode :TX_BLE2M_2478MHz Test BY :Rock Level (dBuV/m) 130 113.8 97.5 81.3 65.0 48.8 32.5 16.3 0 2310 2350 2390 2430 2470 2510 Frequency (MHz) 1 2 101.44 45.85 54.00 -8.15 71.01 15.41 30.43 30.44 Average Average Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	TX_BLE2M_2478MHz_H_Peak Site :HY-CB03 Condition :3m ,Horizontal Mode :TX_BLE2M_2478MHz Test BY :Rock Level (dBuV/m) 130 113.8 97.5 81.3 65.0 48.8 32.5 16.3 0 2310 2350 2390 2430 2470 2510 Frequency (MHz) 1 2 103.21 59.88 74.00 -14.12 72.78 29.44 30.43 30.44 Peak Peak Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.
TX_BLE2M_2478MHz_V_Average Site :HY-CB03 Condition :3m ,Vertical Mode :TX_BLE2M_2478MHz Test BY :Rock Level (dBuV/m) 130 113.8 97.5 81.3 65.0 48.8 32.5 16.3 0 2310 2350 2390 2430 2470 2510 Frequency (MHz) 1 2 102.54 45.91 54.00 -8.09 72.11 15.47 30.43 30.44 Average Average Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	TX_BLE2M_2478MHz_V_Peak Site :HY-CB03 Condition :3m ,Vertical Mode :TX_BLE2M_2478MHz Test BY :Rock Level (dBuV/m) 130 113.8 97.5 81.3 65.0 48.8 32.5 16.3 0 2310 2350 2390 2430 2470 2510 Frequency (MHz) 1 2 104.33 59.60 74.00 -14.40 73.90 29.16 30.43 30.44 Peak Peak Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Bluetooth LE Audio

TX_LE Audio1M_2402MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_LE Audio1M_2402MHz
Test BY :Rock

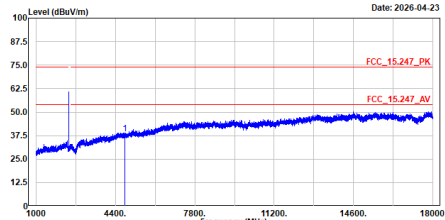


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4884.000	38.60	74.00	-35.40	53.35	-14.75	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_LE Audio1M_2402MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_LE Audio1M_2402MHz
Test BY :Rock

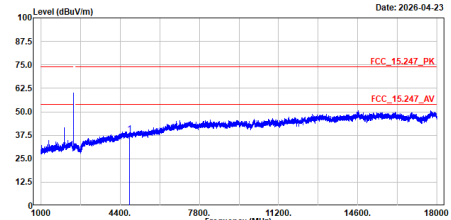


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4884.000	38.05	74.00	-35.95	52.80	-14.75	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_LE Audio1M_2440MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_LE Audio1M_2440MHz
Test BY :Rock

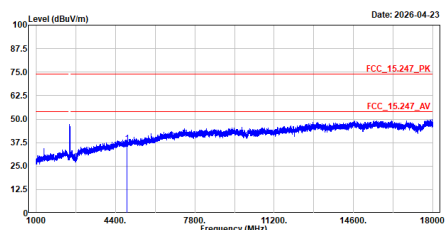


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4880.000	36.87	74.00	-37.13	51.35	-14.48	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_LE Audio1M_2440MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_LE Audio1M_2440MHz
Test BY :Rock

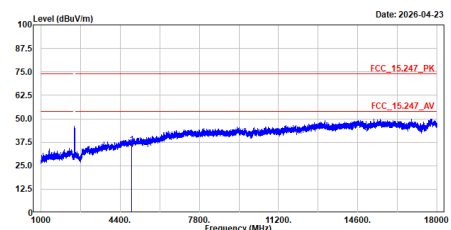


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4880.000	36.19	74.00	-37.81	50.67	-14.48	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Page : 30 of 40

TX_LE Audio2M_2440MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_LE Audio2M_2440MHz
Test BY :Rock

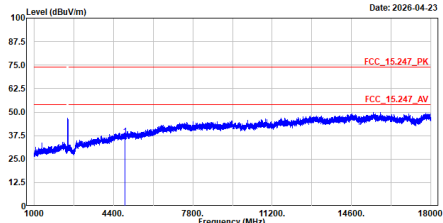


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4880.000	36.81	74.00	-37.19	51.29	-14.48	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_LE Audio2M_2440MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_LE Audio2M_2440MHz
Test BY :Rock

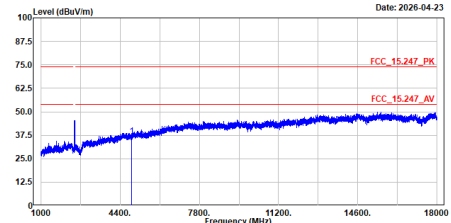


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4880.000	36.80	74.00	-37.20	51.28	-14.48	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_LE Audio2M_2478MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_LE Audio2M_2478MHz
Test BY :Rock

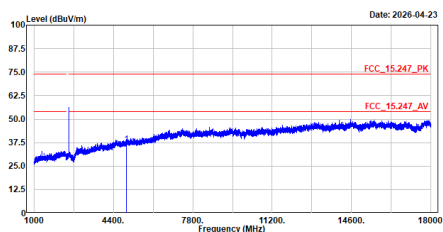


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4956.000	36.55	74.00	-37.45	50.69	-14.14	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_LE Audio2M_2478MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_LE Audio2M_2478MHz
Test BY :Rock

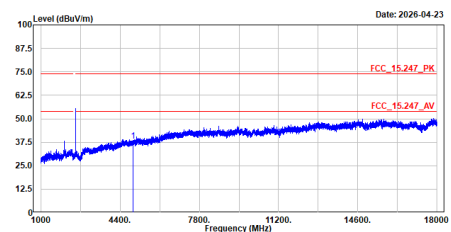

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4956.000	37.93	74.00	-36.07	52.87	-14.14	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_LE Audio2M_2440MHz_H_QP

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_LE Audio2M_2440MHz
Test BY :Rock

Level (dBuV/m)

100
87.5
75.0
62.5
50.0
37.5
25.0
12.5
0

30224.4186128061000

Frequency (MHz)

Date: 2026-04-24

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	55.414	29.62	40.00	-10.38	53.37	-23.75	QP
2	135.148	28.16	43.50	-15.34	52.87	-24.71	QP
3	257.562	31.19	46.00	-14.81	55.90	-24.71	QP
4	375.514	27.22	46.00	-18.78	48.19	-20.97	QP
5	754.105	26.04	46.00	-19.96	39.00	-12.96	QP
6	841.502	29.90	46.00	-16.10	42.12	-12.22	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_LE Audio2M_2440MHz_V_QP

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_LE Audio2M_2440MHz
Test BY :Rock

Level (dBuV/m)

100
87.5
75.0
62.5
50.0
37.5
25.0
12.5
0



30224.4186128061000



Frequency (MHz)

Date: 2026-04-24


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	55.996	34.97	40.00	-5.03	58.72	-23.75	QP
2	134.857	35.41	43.50	-8.09	60.14	-24.73	QP
3	193.833	30.87	43.50	-12.63	57.57	-26.70	QP
4	409.852	27.64	46.00	-18.36	47.99	-20.35	QP
5	742.562	28.20	46.00	-17.80	41.33	-13.13	QP
6	841.502	30.39	46.00	-15.61	42.61	-12.22	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

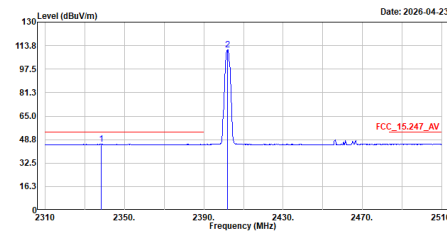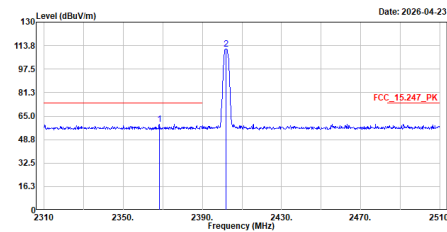
TX_LE Audio1M_2402MHz_H_Average				TX_LE Audio1M_2402MHz_H_Peak											
Site :HY-CB03 Condition :3m ,Horizontal Mode :TX_LE Audio1M_2402MHz Test BY :Rock				Site :HY-CB03 Condition :3m ,Horizontal Mode :TX_LE Audio1M_2402MHz Test BY :Rock											
															
No.	Frequency	Level	Limit	Over	Read	Factor	Remark	No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2338.200	45.59	54.00	-8.41	15.10	30.49	Average	1	2368.200	59.43	74.00	-14.57	28.95	30.48	Peak
2	2402.000	118.99	-----	-----	80.52	30.47	Average	2	2401.800	111.58	-----	-----	81.11	30.47	Peak
Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.								Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.							

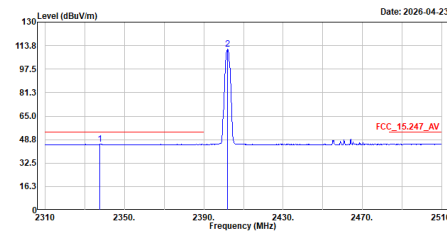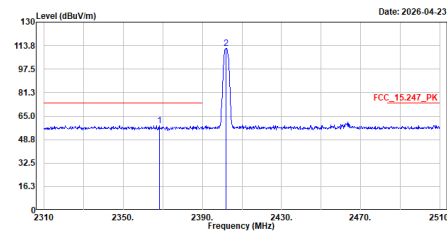TX_LE Audio1M_2402MHz_V_Average				TX_LE Audio1M_2402MHz_V_Peak											
Site :HY-CB03 Condition :3m ,Vertical Mode :TX_LE Audio1M_2402MHz Test BY :Rock				Site :HY-CB03 Condition :3m ,Vertical Mode :TX_LE Audio1M_2402MHz Test BY :Rock											
															
No.	Frequency	Level	Limit	Over	Read	Factor	Remark	No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2337.600	45.70	54.00	-8.30	15.21	30.49	Average	1	2368.400	58.42	74.00	-15.58	27.94	30.48	Peak
2	2402.000	111.11	-----	-----	80.64	30.47	Average	2	2401.800	111.69	-----	-----	81.22	30.47	Peak
Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.								Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.							


TX_LE Audio1M_2480MHz_H_Average

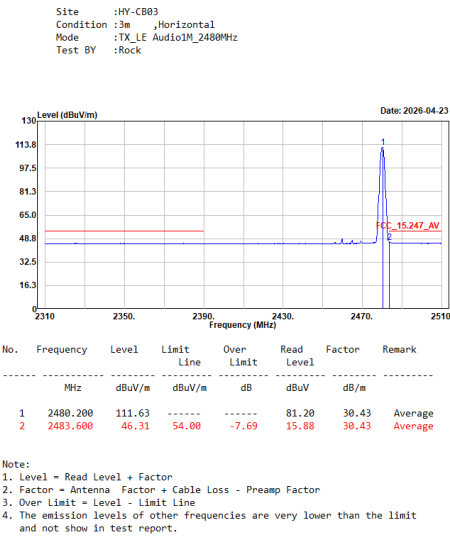


TX_LE Audio1M_2480MHz_H_Peak

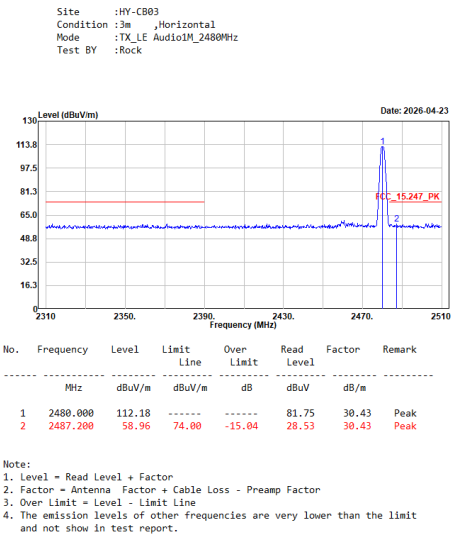

TX_LE Audio1M_2480MHz_V_Average

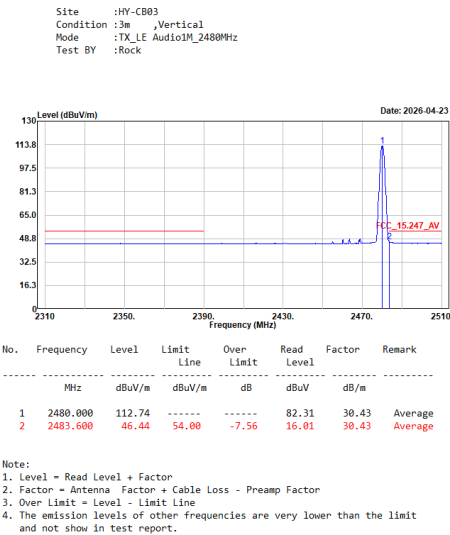



TX_LE Audio1M_2480MHz_V_Peak

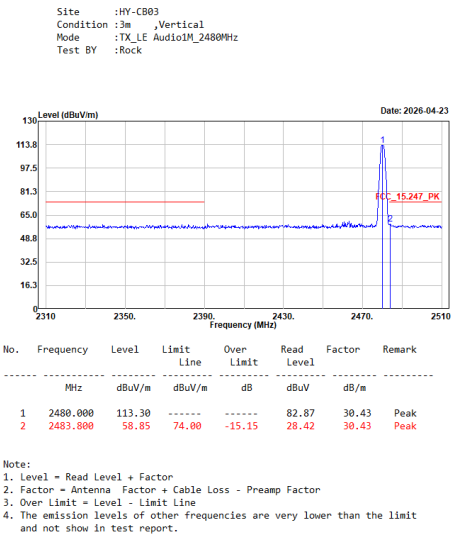



TX_LE Audio2M_2404MHz_H_Average		TX_LE Audio2M_2404MHz_H_Peak																																																																	
Site :HY-CB03 Condition :3m ,Horizontal Mode :TX_LE Audio2M_2404MHz Test BY :Rock Level (dBuV/m) 113.8 97.5 81.3 65.0 48.8 32.5 16.3 231023502390243024702510 Frequency (MHz) FCC_15.247_AV		Site :HY-CB03 Condition :3m ,Horizontal Mode :TX_LE Audio2M_2404MHz Test BY :Rock Level (dBuV/m) 113.8 97.5 81.3 65.0 48.8 32.5 16.3 231023502390243024702510 Frequency (MHz) FCC_15.247_PK																																																																	
<table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>2339.400</td><td>45.85</td><td>54.00</td><td>-8.15</td><td>15.37</td><td>30.48</td><td>Average</td></tr><tr><td>2</td><td>2404.000</td><td>109.64</td><td></td><td></td><td>79.19</td><td>30.45</td><td>Average</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.		No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	2339.400	45.85	54.00	-8.15	15.37	30.48	Average	2	2404.000	109.64			79.19	30.45	Average	<table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>2373.800</td><td>59.13</td><td>74.00</td><td>-14.87</td><td>28.65</td><td>30.48</td><td>Peak</td></tr><tr><td>2</td><td>2403.600</td><td>111.42</td><td></td><td></td><td>80.97</td><td>30.45</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.		No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	2373.800	59.13	74.00	-14.87	28.65	30.48	Peak	2	2403.600	111.42			80.97	30.45	Peak
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																													
1	2339.400	45.85	54.00	-8.15	15.37	30.48	Average																																																												
2	2404.000	109.64			79.19	30.45	Average																																																												
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																													
1	2373.800	59.13	74.00	-14.87	28.65	30.48	Peak																																																												
2	2403.600	111.42			80.97	30.45	Peak																																																												

TX_LE Audio2M_2404MHz_V_Average		TX_LE Audio2M_2404MHz_V_Peak																																																																	
Site :HY-CB03 Condition :3m ,Vertical Mode :TX_LE Audio2M_2404MHz Test BY :Rock Level (dBuV/m) 113.8 97.5 81.3 65.0 48.8 32.5 16.3 231023502390243024702510 Frequency (MHz) FCC_15.247_AV		Site :HY-CB03 Condition :3m ,Vertical Mode :TX_LE Audio2M_2404MHz Test BY :Rock Level (dBuV/m) 113.8 97.5 81.3 65.0 48.8 32.5 16.3 231023502390243024702510 Frequency (MHz) FCC_15.247_PK																																																																	
<table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>2340.400</td><td>45.92</td><td>54.00</td><td>-8.08</td><td>15.45</td><td>30.47</td><td>Average</td></tr><tr><td>2</td><td>2404.000</td><td>109.74</td><td></td><td></td><td>79.29</td><td>30.45</td><td>Average</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.		No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	2340.400	45.92	54.00	-8.08	15.45	30.47	Average	2	2404.000	109.74			79.29	30.45	Average	<table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>2383.000</td><td>58.50</td><td>74.00</td><td>-15.50</td><td>28.81</td><td>30.49</td><td>Peak</td></tr><tr><td>2</td><td>2403.600</td><td>111.47</td><td></td><td></td><td>81.02</td><td>30.45</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.		No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	2383.000	58.50	74.00	-15.50	28.81	30.49	Peak	2	2403.600	111.47			81.02	30.45	Peak
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																													
1	2340.400	45.92	54.00	-8.08	15.45	30.47	Average																																																												
2	2404.000	109.74			79.29	30.45	Average																																																												
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																													
1	2383.000	58.50	74.00	-15.50	28.81	30.49	Peak																																																												
2	2403.600	111.47			81.02	30.45	Peak																																																												

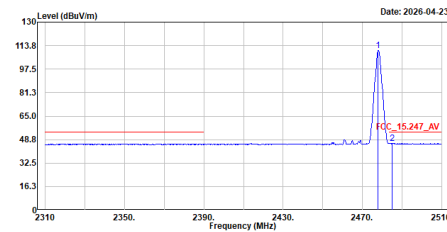TX_LE Audio2M_2478MHz_H_Average							
Site :HY-CB03 Condition :3m ,Horizontal Mode :TX_LE Audio2M_2478MHz Test BY :Rock							
							
No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2478.000	119.40	-----	-----	79.97	30.43	Average
2	2485.000	46.16	54.00	-7.84	15.73	30.43	Average
Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.							

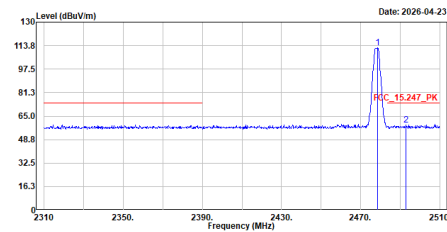TX_LE Audio2M_2478MHz_H_Peak							
Site :HY-CB03 Condition :3m ,Horizontal Mode :TX_LE Audio2M_2478MHz Test BY :Rock							
							
No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2478.600	112.12	-----	-----	81.69	30.43	Peak
2	2493.000	58.86	74.00	-15.14	28.42	30.44	Peak
Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.							

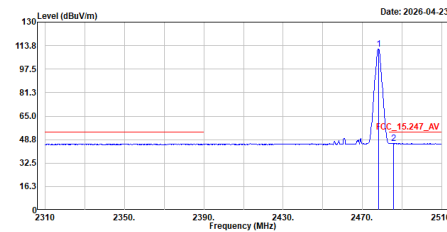TX_LE Audio2M_2478MHz_V_Average							
Site :HY-CB03 Condition :3m ,Vertical Mode :TX_LE Audio2M_2478MHz Test BY :Rock							
							
No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2478.200	111.45	-----	-----	81.02	30.43	Average
2	2485.000	46.12	54.00	-7.88	15.69	30.43	Average
Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.							

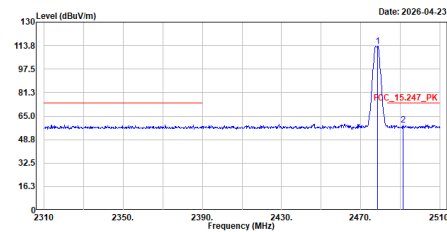TX_LE Audio2M_2478MHz_V_Peak							
Site :HY-CB03 Condition :3m ,Vertical Mode :TX_LE Audio2M_2478MHz Test BY :Rock							
							
No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2478.600	113.24	-----	-----	82.81	30.43	Peak
2	2491.600	59.10	74.00	-14.90	28.66	30.44	Peak
Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.							

Worst-Case Emissions Above 18 GHz

