



Inter**Lab**<sup>®</sup>

Final Report on

OTE22

FCC ID: BCE-OTE22

IC: 2386C-OTE22

**Report Reference:**

MDE\_GNNET\_1311\_FCCb  
According to:  
FCC 47 CFR Ch.1 Part 15 Subpart B

**Date:**

January 28, 2014

**Test Laboratory:**

7Layers AG  
Borsigstr. 11  
40880 Ratingen  
Germany



**Note:**

The following test results relate only to the devices specified in this document. This report shall not be reproduced in parts without the written approval of the test laboratory.

7Layers AG  
Borsigstrasse 11  
40880 Ratingen, Germany  
Phone: +49 (0) 2102 749 0  
Fax: +49 (0) 2102 749 350  
www.7Layers.com

Aufsichtsratsvorsitzender •  
Chairman of the Supervisory Board:  
Peter Mertel  
Vorstand • Board:  
Dr. H.-J. Meckelburg

Registergericht • registered in:  
Düsseldorf, HRB 44096  
USt-IdNr • VAT No.:  
DE 203159652  
TAX No. 147/5869/0385

## 1 Administrative Data

### 1.1 Project Data

*Project Responsible:* Patrick Lomax  
*Date Of Test Report:* 2014/01/28  
*Date of first test:* 2014/01/15  
*Date of last test:* 2014/01/22

### 1.2 Applicant Data

*Company Name:* GN Netcom A/S  
*Street:* Lautrupbjerg 7  
*City:* DK-2750 Ballerup  
*Country:* Denmark  
*Contact Person:* Mr. Tom Ringtved  
*Phone:* +45 45 75 91 86  
*E-Mail:* tringtved@gn.com

### 1.3 Test Laboratory Data

The following list shows all places and laboratories involved for test result generation:

#### 7 layers DE

*Company Name :* 7 layers AG  
*Street :* Borsigstrasse 11  
*City :* 40880 Ratingen  
*Country :* Germany  
*Contact Person :* Mr. Michael Albert  
*Phone :* +49 2102 749 201  
*Fax :* +49 2102 749 444  
*E Mail :* michael.albert@7Layers.de

#### Laboratory Details

| Lab ID | Identification      | Responsible                             | Accreditation Info                      |
|--------|---------------------|-----------------------------------------|-----------------------------------------|
| Lab 1  | Conducted Emissions | Mr. Robert Machulec<br>Mr. Andreas Petz | DAkKS-Registration no. D-PL-12140-01-01 |
| Lab 2  | Radiated Emissions  | Mr. Robert Machulec<br>Mr. Andreas Petz | DAkKS-Registration no. D-PL-12140-01-01 |

### 1.4 Signature of the Testing Responsible



Patrick Lomax  
responsible for tests performed in: Lab 1, Lab 2

## 1.5 Signature of the Accreditation Responsible

*B. Retka [B. RETKA]*

Accreditation scope responsible person  
responsible for Lab 1, Lab 2

## 2 Test Object Data

### 2.1 General OUT Description

The following section lists all OUTs (Object's Under Test) involved during testing.

#### OUT: OTE22

Type / Model / Family: OTE22  
FCC ID: BCE-OTE22  
IC: 2386C-OTE22

Product Category: Mobile Phone Accessory

**Manufacturer:**  
Company Name: Please see applicant data

Contact Person: -

#### Parameter List:

| Parameter name       | Value          |
|----------------------|----------------|
| Antenna Gain         | 2.18           |
| Battery Charger      | 120V/60Hz (AC) |
| highest channel (BT) | 2480 (MHz)     |
| lowest channel (BT)  | 2402 (MHz)     |
| mid channel (BT)     | 2441 (MHz)     |
| Powered by Battery   | 3.7 (V)        |

### 2.2 Detailed Description of OUT Samples

#### Sample : A01

|                    |                 |              |       |
|--------------------|-----------------|--------------|-------|
| OUT Identifier     | OTE22           |              |       |
| Sample Description | Standard sample |              |       |
| HW Status          | brage03         |              |       |
| SW Status          | 3.3043          |              |       |
| Low Voltage        | 3.5 V           |              |       |
| High Voltage       | 4.2 V           |              |       |
| Nominal Voltage    | 3.7 V           | Normal Temp. | 25 °C |

## 2.3 OUT Features

### Features for OUT: OTE22

| Designation                       | Description                                                                                                          | Allowed Values | Supported Value(s) |
|-----------------------------------|----------------------------------------------------------------------------------------------------------------------|----------------|--------------------|
| <b>Features for scope: FCC_v2</b> |                                                                                                                      |                |                    |
| AC                                | The OUT is powered by or connected to AC Mains                                                                       |                |                    |
| BTLE                              | Support of Bluetooth Low Energy                                                                                      |                |                    |
| Iant                              | Integral Antenna: permanent fixed antenna, which may be built-in, designed as an indispensable part of the equipment |                |                    |
| TantC                             | temporary antenna connector, which may be only built-in for testing, designed as an example part of the equipment    |                |                    |
| Wa1                               | EUT supports WLAN in mode a in the band 5150 MHz - 5250 MHz                                                          |                |                    |

## 2.4 Auxiliary Equipment

| AE No. | Type Designation                | Serial No.     | HW Status    | SW Status       | Description  |
|--------|---------------------------------|----------------|--------------|-----------------|--------------|
| AE 3   | 0335C2065                       | A30638114250   | 120V/60Hz AC |                 | AC Adapter 2 |
| AE 5   | Cherry RS 6000 USB ON           | G 0000273 2P28 |              |                 | Keyboard     |
| AE 2   | Fujitsu Siemens AMILO Pro V3205 | YK2H014267     | 120V/60Hz AC | Windows 7 Pro   | Laptop 2     |
| AE 6   | iPhone 4S A1387                 | DNWGTX07DTC0   |              | 7.0.4 (11B554a) | Mobile Phone |
| AE 1   | LG Flatron L1740BQ              | 509WANF1W607   | 120V/60Hz AC |                 | TFT Display  |
| AE 4   | Logitech M-BB48                 | LZC90505478    |              |                 | Mouse        |

## 2.5 Setups used for Testing

For each setup a relation is given to determine if and which samples and auxiliary equipment is used. The left side list all OUT samples and the right side lists all auxiliary equipment for the given setup.

| Setup No.                                  | List of OUT samples |                    | List of auxiliary equipment |                |
|--------------------------------------------|---------------------|--------------------|-----------------------------|----------------|
|                                            | Sample No.          | Sample Description | AE No.                      | AE Description |
| <b>S02_A01 (Computer Peripheral Setup)</b> |                     |                    |                             |                |
|                                            | Sample: A01         | Stadnard sample    | AE 3                        | AC Adapter 2   |
|                                            |                     |                    | AE 5                        | Keyboard       |
|                                            |                     |                    | AE 2                        | Laptop 2       |
|                                            |                     |                    | AE 6                        | Mobile Phone   |
|                                            |                     |                    | AE 1                        | TFT Display    |
|                                            |                     |                    | AE 4                        | Mouse          |

### 3 Results

#### 3.1 General

**Documentation of tested devices:**

Available at the test laboratory.

**Interpretation of the test results:**

The results of the inspection are described on the following pages, where 'Conformity' or 'Passed' means that the certification criteria were verified and that the tested device is conform to the applied standard.

In cases where 'Declaration' is printed, the required documents are available in the manufacturers product documentation.

In cases where 'not applicable' is printed, the test case requirements are not relevant to the specific equipment implementation.

**Note:**

The laboratory environmental conditions are recorded and available in the Interlab system for each performed test.

#### 3.2 List of the Applicable Body

(Body for Scope: FCC\_v2)

| <i>Designation</i>                           | <i>Description</i>                           |
|----------------------------------------------|----------------------------------------------|
| FCC47CFRChIPART15bRADIO<br>FREQUENCY DEVICES | Part 15, Subpart B - Unintentional Radiators |

#### 3.3 List of Test Specification

|                            |                                                                             |
|----------------------------|-----------------------------------------------------------------------------|
| <i>Test Specification:</i> | <b>FCC part 2 and 15</b>                                                    |
| <i>Version</i>             | 10-1-12 Edition                                                             |
| <i>Title:</i>              | PART 2 - GENERAL RULES AND REGULATIONS<br>PART 15 - RADIO FREQUENCY DEVICES |



Reference: MDE\_GNNET\_1311\_FCCb  
According to:  
FCC 47 CFR Ch.1 Part 15 Subpart B

### 3.4 Summary

| <i>Test Case Identifier / Name</i><br><i>Test (condition)</i> | <i>Result</i> | <i>Date of Test</i> | <i>Lab</i><br><i>Ref.</i> | <i>Setup</i> |
|---------------------------------------------------------------|---------------|---------------------|---------------------------|--------------|
| <b>15b.1 Conducted Emissions (AC Power Line) §15.107</b>      |               |                     |                           |              |
| 15b.1; Mode = generating a high power consumption             | Passed        | 2014/01/22          | Lab 1                     | S02_A01      |
| <b>15b.2 Spurious Radiated Emissions §15.109</b>              |               |                     |                           |              |
| 15b.2; Mode = generating a high power consumption             | Passed        | 2014/01/15          | Lab 2                     | S02_A01      |



---

Reference: MDE\_GNNET\_1311\_FCCb  
According to:  
FCC 47 CFR Ch.1 Part 15 Subpart B

### **3.5 Detailed Results**

#### **3.5.1 15b.1 Conducted Emissions (AC Power Line) §15.107**

**Test: 15b.1; Mode = generating a high power consumption**

|                            |                                           |
|----------------------------|-------------------------------------------|
| <i>Result:</i>             | Passed                                    |
| <i>Setup No.:</i>          | S02_A01                                   |
| <i>Date of Test:</i>       | 2014/01/22 11:08                          |
| <i>Body:</i>               | FCC47CFRChIPART15bRADIO FREQUENCY DEVICES |
| <i>Test Specification:</i> | FCC part 2 and 15                         |


## Detailed Results:

### AC MAINS CONDUCTED

EUT: (CJ270a01)  
Manufacturer: GNNET  
Operating Condition: music playback via USB, BT connection to phone  
Test Site: 7 layers Ratingen  
Operator: Doe  
Test Specification: ANSI C63.4; FCC 15.107 / 15.207  
Comment:  
Start of Test: 21.01.2014 / 16:52:28

### SCAN TABLE: "FCC Voltage"

| Start Frequency | Stop Frequency | Step Width | FCC Voltage Detector | Meas. Time | IF Bandw. | Transducer |
|-----------------|----------------|------------|----------------------|------------|-----------|------------|
| 150.0 kHz       | 30.0 MHz       | 5.0 kHz    | MaxPeak Average      | 20.0 ms    | 9 kHz     | ESH3-Z5    |

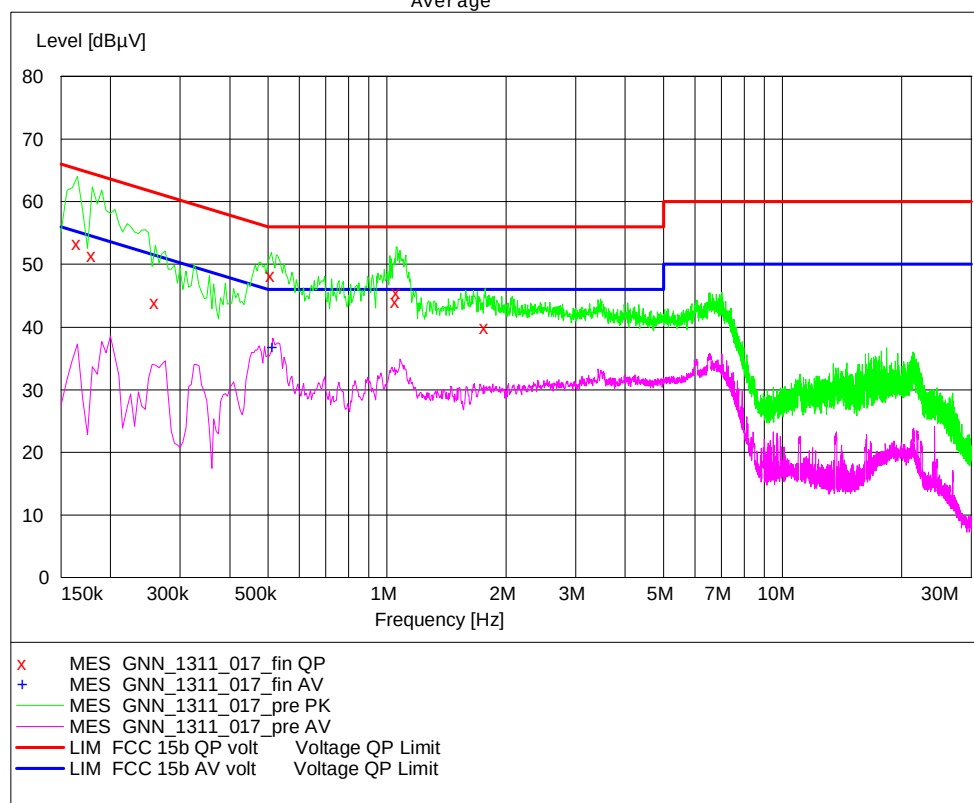

### MEASUREMENT RESULT: "GNN\_1311\_017\_fin QP"

| 21.01.2014 16:58 |            |           |            |           |      |     |
|------------------|------------|-----------|------------|-----------|------|-----|
| Frequency MHz    | Level dBμV | Transd dB | Limit dBμV | Margin dB | Line | PE  |
| 0.165000         | 53.40      | 10.1      | 65         | 11.8      | N    | FLO |
| 0.180000         | 51.40      | 10.1      | 65         | 13.1      | L1   | GND |
| 0.260000         | 43.90      | 10.1      | 61         | 17.5      | N    | FLO |
| 0.510000         | 48.20      | 10.1      | 56         | 7.8       | L1   | GND |
| 1.055000         | 44.10      | 10.1      | 56         | 11.9      | N    | GND |
| 1.060000         | 45.50      | 10.1      | 56         | 10.5      | L1   | FLO |
| 1.770000         | 39.90      | 10.1      | 56         | 16.1      | L1   | FLO |

### MEASUREMENT RESULT: "GNN\_1311\_017\_fin AV"

| 21.01.2014 16:58 |            |           |            |           |      |     |
|------------------|------------|-----------|------------|-----------|------|-----|
| Frequency MHz    | Level dBμV | Transd dB | Limit dBμV | Margin dB | Line | PE  |
| 0.515000         | 36.80      | 10.1      | 46         | 9.2       | L1   | FLO |



---

Reference: MDE\_GNNET\_1311\_FCCb  
According to:  
FCC 47 CFR Ch.1 Part 15 Subpart B

### **3.5.2 15b.2 Spurious Radiated Emissions §15.109**

**Test: 15b.2; Mode = generating a high power consumption**

|                            |                                           |
|----------------------------|-------------------------------------------|
| <i>Result:</i>             | Passed                                    |
| <i>Setup No.:</i>          | S02_A01                                   |
| <i>Date of Test:</i>       | 2014/01/15 11:13                          |
| <i>Body:</i>               | FCC47CFRChIPART15bRADIO FREQUENCY DEVICES |
| <i>Test Specification:</i> | FCC part 2 and 15                         |


## Detailed Results:

### EMI RADIATED TEST

EUT: (CJ270a01)  
Manufacturer: GNNET  
Operating Condition: music playback via USB, BT connection to phone  
Test Site: 7 layers, Ratingen  
Operator: Doe  
Test Specification: FCC part 15 b / Class B  
Comment: Horizontal EUT position  
Start of Test: 14.01.2014 / 23:54:05

### SCAN TABLE: "FCC part 15 b"

| Short Description: |           | FCC part 15 b |          |            |           |            |
|--------------------|-----------|---------------|----------|------------|-----------|------------|
| Start              | Stop      | Step          | Detector | Meas. Time | IF Bandw. | Transducer |
| Frequency          | Frequency | Width         |          |            |           |            |
| 30.0 MHz           | 1.0 GHz   | 60.0 kHz      | MaxPeak  | 1.0 ms     | 120 kHz   | HL562      |

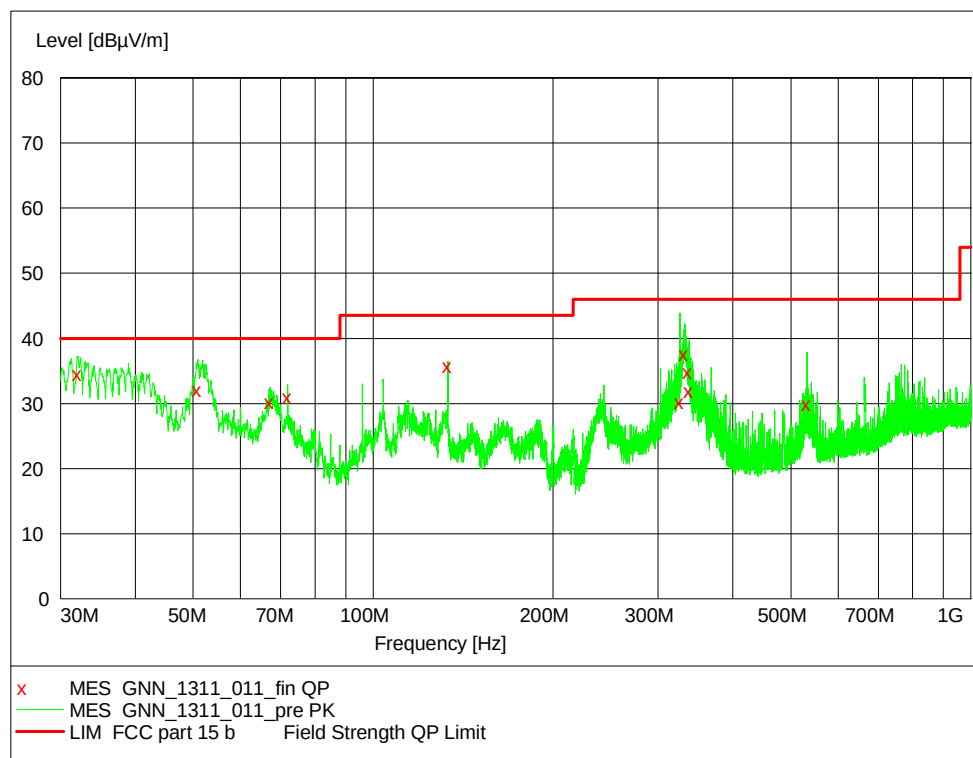

### MEASUREMENT RESULT: "GNN\_1311\_011\_fin QP"

15.01.2014 00:52

| Frequency MHz | Level dBµV/m | Transd dB | Limit dBµV/m | Margin dB | Height cm | Azimuth deg | Polarisation |
|---------------|--------------|-----------|--------------|-----------|-----------|-------------|--------------|
| 32.100000     | 34.60        | 19.4      | 40.0         | 5.4       | 100.0     | 68.00       | VERTICAL     |
| 50.880000     | 32.10        | 8.2       | 40.0         | 7.9       | 100.0     | 317.00      | VERTICAL     |
| 67.320000     | 30.20        | 6.7       | 40.0         | 9.8       | 144.0     | 247.00      | VERTICAL     |
| 72.000000     | 31.00        | 8.2       | 40.0         | 9.0       | 125.0     | 247.00      | VERTICAL     |
| 133.440000    | 35.80        | 9.8       | 43.5         | 7.7       | 325.0     | 67.00       | HORIZONTAL   |
| 326.100000    | 30.20        | 13.7      | 46.0         | 15.8      | 119.0     | 338.00      | HORIZONTAL   |
| 332.160000    | 37.60        | 13.9      | 46.0         | 8.4       | 121.0     | 10.00       | HORIZONTAL   |
| 337.200000    | 34.90        | 13.9      | 46.0         | 11.1      | 100.0     | 19.00       | HORIZONTAL   |
| 338.460000    | 32.00        | 14.0      | 46.0         | 14.0      | 120.0     | 338.00      | HORIZONTAL   |
| 532.320000    | 30.00        | 18.6      | 46.0         | 16.0      | 112.0     | 224.00      | HORIZONTAL   |

## 4 Test Equipment Details

### 4.1 List of Used Test Equipment

The calibration, hardware and software states are shown for the testing period.

#### Test Equipment Anechoic Chamber

|                      |                                       |                       |                   |
|----------------------|---------------------------------------|-----------------------|-------------------|
| <b>Lab ID:</b>       | <b>Lab 2</b>                          |                       |                   |
| <b>Manufacturer:</b> | Frankonia                             |                       |                   |
| <b>Description:</b>  | Anechoic Chamber for radiated testing |                       |                   |
| <b>Type:</b>         | 10.58x6.38x6.00 m <sup>3</sup>        |                       |                   |
|                      | <i>Calibration Details</i>            | <i>Last Execution</i> | <i>Next Exec.</i> |
|                      | NSA (FCC)                             | 2014/01/09            | 2017/01/09        |

#### Single Devices for Anechoic Chamber

| <i>Single Device Name</i> | <i>Type</i>                        | <i>Serial Number</i> | <i>Manufacturer</i>                     |
|---------------------------|------------------------------------|----------------------|-----------------------------------------|
| Air compressor            | none                               | -                    | Atlas Copco                             |
| Anechoic Chamber          | 10.58 x 6.38 x 6.00 m <sup>3</sup> | none                 | Frankonia                               |
|                           | <i>Calibration Details</i>         |                      | <i>Last Execution</i> <i>Next Exec.</i> |
|                           | IC listing 3699A-1 3m              |                      | 2011/02/07 2014/02/06                   |
|                           | FCC listing 96716 3m Part15/18     |                      | 2014/01/09 2017/01/08                   |
| Controller Maturo         | MCU                                | 961208               | Maturo GmbH                             |
| EMC camera                | CE-CAM/1                           | -                    | CE-SYS                                  |
| EMC camera Nr.2           | CCD-400E                           | 0005033              | Mitsubishi                              |
| Filter ISDN               | B84312-C110-E1                     |                      | Siemens&Matsushita                      |
| Filter Universal 1A       | BB4312-C30-H3                      | -                    | Siemens&Matsushita                      |

## Test Equipment Auxiliary Equipment for Conducted emissions

**Lab ID:** Lab 1  
**Manufacturer:** Rohde & Schwarz GmbH & Co.KG  
**Description:** EMI Conducted Auxiliary Equipment

### Single Devices for Auxiliary Equipment for Conducted emissions

| Single Device Name              | Type                 | Serial Number | Manufacturer                  |
|---------------------------------|----------------------|---------------|-------------------------------|
| Cable "LISN to ESI"             | RG214                | W18.03+W48.03 | Huber&Suhner                  |
| Coupling-Decoupling-<br>Network | CDN ENY41            | 100002        | Rohde & Schwarz GmbH & Co. KG |
|                                 | Calibration Details  |               | Last Execution Next Exec.     |
|                                 | Standard Calibration |               | 2013/03/01 2015/02/28         |
| One-Line V-Network              | ESH 3-Z6             | 100489        | Rohde & Schwarz GmbH & Co. KG |
|                                 | Calibration Details  |               | Last Execution Next Exec.     |
|                                 | Standard calibration |               | 2011/02/08 2014/02/07         |
| One-Line V-Network              | ESH 3-Z6             | 100570        | Rohde & Schwarz GmbH & Co. KG |
|                                 | Calibration Details  |               | Last Execution Next Exec.     |
|                                 | Standard Calibration |               | 2013/11/25 2016/11/24         |
| Two-Line V-Network              | ESH 3-Z5             | 828304/029    | Rohde & Schwarz GmbH & Co. KG |
|                                 | Calibration Details  |               | Last Execution Next Exec.     |
|                                 | Standart Calibration |               | 2013/03/01 2015/02/28         |
| Two-Line V-Network              | ESH 3-Z5             | 829996/002    | Rohde & Schwarz GmbH & Co. KG |
|                                 | Calibration Details  |               | Last Execution Next Exec.     |
|                                 | Standard Calibration |               | 2013/03/01 2015/02/28         |

## Test Equipment Auxiliary Equipment for Radiated emissions

**Lab ID:** Lab 2  
**Description:** Equipment for emission measurements  
**Serial Number:** see single devices

### Single Devices for Auxiliary Equipment for Radiated emissions

| Single Device Name                           | Type                   | Serial Number              | Manufacturer                     |
|----------------------------------------------|------------------------|----------------------------|----------------------------------|
| Antenna mast                                 | AM 4.0                 | AM4.0/180/11920 513        | Maturo GmbH                      |
| Biconical Broadband Antenna                  | SBA 9119               | 9119-005                   | Schwarzbeck                      |
|                                              |                        | <i>Calibration Details</i> | <i>Last Execution Next Exec.</i> |
|                                              |                        | Standard Calibration       | 2009/06/04 2014/06/03            |
| Biconical dipole                             | VUBA 9117              | 9117-108                   | Schwarzbeck                      |
|                                              |                        | <i>Calibration Details</i> | <i>Last Execution Next Exec.</i> |
|                                              |                        | Standard Calibration       | 2012/01/18 2015/01/17            |
| Broadband Amplifier 18MHz-26GHz              | JS4-18002600-32-5P     | 849785                     | Miteq                            |
| Broadband Amplifier 1GHz-4GHz                | AFS4-01000400-1Q-10P-4 | -                          | Miteq                            |
| Broadband Amplifier 30MHz-18GHz              | JS4-00101800-35-5P     | 896037                     | Miteq                            |
| Cable "ESI to EMI Antenna"                   | EcoFlex10              | W18.01-2+W38.01-2          | Kabel Kusch                      |
| Cable "ESI to Horn Antenna"                  | UFB311A+UFB293C        | W18.02-2+W38.02-2          | Rosenberger Micro-Coax           |
| Double-ridged horn                           | HF 906                 | 357357/001                 | Rohde & Schwarz GmbH & Co. KG    |
|                                              |                        | <i>Calibration Details</i> | <i>Last Execution Next Exec.</i> |
|                                              |                        | Standard Calibration       | 2012/05/18 2015/05/17            |
| Double-ridged horn                           | HF 906                 | 357357/002                 | Rohde & Schwarz GmbH & Co. KG    |
|                                              |                        | <i>Calibration Details</i> | <i>Last Execution Next Exec.</i> |
|                                              |                        | Standard Calibration       | 2012/06/26 2015/06/25            |
| High Pass Filter                             | 4HC1600/12750-1.5-KK   | 9942011                    | Trilithic                        |
| High Pass Filter                             | 5HC2700/12750-1.5-KK   | 9942012                    | Trilithic                        |
| High Pass Filter                             | 5HC3500/12750-1.2-KK   | 200035008                  | Trilithic                        |
| High Pass Filter                             | WHKX 7.0/18G-8SS       | 09                         | Wainwright                       |
| Horn Antenna Schwarzbeck 15-26 GHz BBHA 9170 | BBHA 9170              |                            |                                  |
| Log.-per. Antenna                            | HL 562 Ultralog        | 100609                     | Rohde & Schwarz GmbH & Co. KG    |
|                                              |                        | <i>Calibration Details</i> | <i>Last Execution Next Exec.</i> |
|                                              |                        | Standard Calibration       | 2012/12/18 2015/12/17            |
| Log.-per. Antenna                            | HL 562 Ultralog        | 830547/003                 | Rohde & Schwarz GmbH & Co. KG    |
| Loop Antenna                                 | HFH2-Z2                | 829324/006                 | Rohde & Schwarz GmbH & Co. KG    |
|                                              |                        | <i>Calibration Details</i> | <i>Last Execution Next Exec.</i> |
|                                              |                        | Standard calibration       | 2011/10/27 2014/10/26            |

### Single Devices for Auxiliary Equipment for Radiated emissions (continued)

| Single Device Name              | Type               | Serial Number          | Manufacturer         |
|---------------------------------|--------------------|------------------------|----------------------|
| Pyramidal Horn Antenna 26,5 GHz | 3160-09            | 00083069               | EMCO Elektronik GmbH |
| Pyramidal Horn Antenna 40 GHz   | 3160-10            | 00086675               | EMCO Elektronik GmbH |
| Tilt device Maturo (Rohacell)   | Antrieb TD1.5-10kg | TD1.5-10kg/024/3790709 | Maturo GmbH          |

### Test Equipment Auxiliary Test Equipment

|                       |                                           |
|-----------------------|-------------------------------------------|
| <b>Lab ID:</b>        | <b>Lab 2</b>                              |
| <b>Manufacturer:</b>  | see single devices                        |
| <b>Description:</b>   | Single Devices for various Test Equipment |
| <b>Type:</b>          | various                                   |
| <b>Serial Number:</b> | none                                      |

### Single Devices for Auxiliary Test Equipment

| Single Device Name                 | Type             | Serial Number              | Manufacturer                            |
|------------------------------------|------------------|----------------------------|-----------------------------------------|
| Broadband Power Divider N (Aux)    | 1506A / 93459    | LM390                      | Weinschel Associates                    |
| Broadband Power Divider SMA        | WA1515           | A855                       | Weinschel Associates                    |
| Digital Multimeter 03 (Multimeter) | Fluke 177        | 86670383                   | Fluke Europe B.V.                       |
|                                    |                  | <i>Calibration Details</i> | <i>Last Execution</i> <i>Next Exec.</i> |
|                                    |                  | Customized calibration     | 2013/12/04 2015/12/03                   |
| Fibre optic link Satellite (Aux)   | FO RS232 Link    | 181-018                    | Pontis                                  |
| Fibre optic link Transceiver (Aux) | FO RS232 Link    | 182-018                    | Pontis                                  |
| Isolating Transformer              | LTS 604          | 1888                       | Thalheimer Transformatorenwerke GmbH    |
| Notch Filter Ultra Stable (Aux)    | WRCA800/960-6EEK | 24                         | Wainwright                              |
| Spectrum Analyser                  | FSP3             | 836722/011                 | Rohde & Schwarz GmbH & Co. KG           |
|                                    |                  | <i>Calibration Details</i> | <i>Last Execution</i> <i>Next Exec.</i> |
|                                    |                  | Standard                   | 2012/06/13 2015/06/12                   |
| Vector Signal Generator            | SMIQ 03B         | 832492/061                 | Rohde & Schwarz GmbH & Co.KG            |

## Test Equipment Digital Signalling Devices

**Lab ID:** Lab 1, Lab 2  
**Description:** Signalling equipment for various wireless technologies.

### Single Devices for Digital Signalling Devices

| Single Device Name                   | Type                                                                                                                                                                                                   | Serial Number | Manufacturer                  |
|--------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-------------------------------|
| Bluetooth Signalling Unit CBT        | CBT                                                                                                                                                                                                    | 100589        | Rohde & Schwarz GmbH & Co. KG |
|                                      | Calibration Details                                                                                                                                                                                    |               | Last Execution Next Exec.     |
|                                      | Standard calibration                                                                                                                                                                                   |               | 2011/11/24 2014/11/23         |
| CMW500                               | CMW500                                                                                                                                                                                                 | 107500        | Rohde & Schwarz GmbH & Co.KG  |
|                                      | Calibration Details                                                                                                                                                                                    |               | Last Execution Next Exec.     |
|                                      | Initial factory calibration                                                                                                                                                                            |               | 2012/01/26 2014/01/25         |
| Digital Radio Communication Tester   | CMD 55                                                                                                                                                                                                 | 831050/020    | Rohde & Schwarz GmbH & Co. KG |
|                                      | Calibration Details                                                                                                                                                                                    |               | Last Execution Next Exec.     |
|                                      | Standard calibration                                                                                                                                                                                   |               | 2011/11/28 2014/11/27         |
| Universal Radio Communication Tester | CMU 200                                                                                                                                                                                                | 102366        | Rohde & Schwarz GmbH & Co. KG |
|                                      | HW/SW Status                                                                                                                                                                                           |               | Date of Start Date of End     |
|                                      | Hardware:                                                                                                                                                                                              |               | 2007/07/16                    |
|                                      | B11, B21V14, B21-2, B41, B52V14, B52-2, B53-2, B56V14, B68 3v04, PCMCIA, U65V04                                                                                                                        |               |                               |
|                                      | Software:                                                                                                                                                                                              |               |                               |
|                                      | K21 4v21, K22 4v21, K23 4v21, K24 4v21, K42 4v21, K43 4v21, K53 4v21, K56 4v22, K57 4v22, K58 4v22, K59 4v22, K61 4v22, K62 4v22, K63 4v22, K64 4v22, K65 4v22, K66 4v22, K67 4v22, K68 4v22, K69 4v22 |               |                               |
|                                      | Firmware:                                                                                                                                                                                              |               |                               |
|                                      | µP1 8v50 02.05.06                                                                                                                                                                                      |               |                               |
|                                      | ---                                                                                                                                                                                                    |               |                               |
| Universal Radio Communication Tester | CMU 200                                                                                                                                                                                                | 837983/052    | Rohde & Schwarz GmbH & Co. KG |
|                                      | Calibration Details                                                                                                                                                                                    |               | Last Execution Next Exec.     |
|                                      | Standard calibration                                                                                                                                                                                   |               | 2011/12/07 2014/12/06         |
|                                      | HW/SW Status                                                                                                                                                                                           |               | Date of Start Date of End     |
|                                      | HW options:                                                                                                                                                                                            |               | 2007/01/02                    |
|                                      | B11, B21V14, B21-2, B41, B52V14, B52-2, B53-2, B54V14, B56V14, B68 3v04, B95, PCMCIA, U65V02                                                                                                           |               |                               |
|                                      | SW options:                                                                                                                                                                                            |               |                               |
|                                      | K21 4v11, K22 4v11, K23 4v11, K24 4v11, K27 4v10, K28 4v10, K42 4v11, K43 4v11, K53 4v10, K65 4v10, K66 4v10, K68 4v10,                                                                                |               |                               |
|                                      | Firmware:                                                                                                                                                                                              |               |                               |
|                                      | µP1 8v40 01.12.05                                                                                                                                                                                      |               |                               |
|                                      | ---                                                                                                                                                                                                    |               |                               |
|                                      | SW:                                                                                                                                                                                                    |               | 2008/11/03                    |
|                                      | K62, K69                                                                                                                                                                                               |               |                               |
| Vector Signal Generator              | SMU200A                                                                                                                                                                                                | 100912        | Rohde & Schwarz GmbH & Co. KG |

### Test Equipment Emission measurement devices

**Lab ID:** Lab 1, Lab 2  
**Description:** Equipment for emission measurements  
**Serial Number:** see single devices

### Single Devices for Emission measurement devices

| Single Device Name                                  | Type    | Serial Number | Manufacturer                            |
|-----------------------------------------------------|---------|---------------|-----------------------------------------|
| Personal Computer                                   | Dell    | 30304832059   | Dell                                    |
| Power Meter                                         | NRVD    | 828110/016    | Rohde & Schwarz GmbH & Co.KG            |
| <i>Calibration Details</i>                          |         |               | <i>Last Execution</i> <i>Next Exec.</i> |
| Standard calibration                                |         |               | 2013/05/03 2014/05/02                   |
| Sensor Head A                                       | NRV-Z1  | 827753/005    | Rohde & Schwarz GmbH & Co.KG            |
| <i>Calibration Details</i>                          |         |               | <i>Last Execution</i> <i>Next Exec.</i> |
| Standard calibration                                |         |               | 2013/04/30 2014/04/29                   |
| Signal Generator                                    | SMR 20  | 846834/008    | Rohde & Schwarz GmbH & Co. KG           |
| <i>Calibration Details</i>                          |         |               | <i>Last Execution</i> <i>Next Exec.</i> |
| standard calibration                                |         |               | 2011/05/12 2014/05/11                   |
| Spectrum Analyzer                                   | ESIB 26 | 830482/004    | Rohde & Schwarz GmbH & Co. KG           |
| <i>Calibration Details</i>                          |         |               | <i>Last Execution</i> <i>Next Exec.</i> |
| Standard Calibration                                |         |               | 2014/01/07 2016/01/31                   |
| <i>HW/SW Status</i>                                 |         |               | <i>Date of Start</i> <i>Date of End</i> |
| Firmware-Update 4.34.4 from 3.45 during calibration |         |               | 2009/12/03                              |

### Test Equipment Shielded Room 02

**Lab ID:** Lab 1  
**Manufacturer:** Frankonia  
**Description:** Shielded Room for conducted testing  
**Type:** 12 qm  
**Serial Number:** none



---

Reference: MDE\_GNNET\_1311\_FCCb  
According to:  
FCC 47 CFR Ch.1 Part 15 Subpart B

## **5 Annex**

### **5.1 Additional Information for Report**

#### Test Description

-----  
-----

#### Conducted emissions (AC power line)

-----

Standard      FCC Part 15 Subpart B

The test was performed according to: ANSI C 63.4, 2009

#### Test Description

The test set-up was made in accordance to the general provisions of ANSI C 63.4-2009.  
The Equipment Under Test (EUT) was setup in a shielded room to perform the conducted emissions measurements in a typical installation configuration. The EUT was powered from 50 $\mu$ H || 50 Ohm Line Impedance Stabilization Network (LISN) which meets the requirements of ANSI C63.4-2009, Annex B, in the frequency range of the measurements. The LISN's unused connections were terminated with 50 Ohm loads.

The measurement procedure consists of two steps. It is implemented into the EMI test software ES-K1 from R&S.

#### Step 1: Preliminary scan

Intention of this step is, to determine the conducted EMI-profile of the EUT.

EMI receiver settings:

- Detector: Peak - Maxhold
- Frequency range: 150 kHz – 30 MHz
- Frequency steps: 5 kHz
- IF-Bandwidth: 9 kHz
- Measuring time / Frequency step: 20 ms
- Measurement on phase + neutral lines of the power cords

On basis of this preliminary scan the highest amplitudes and the corresponding frequencies relative to the limit are identified. Emissions above the limit and emissions which are in the 10 dB range below the limit are considered.

#### Step 2: Final measurement

Intention of this step is, to determine the highest emissions with the settings defined in the test specification for the frequencies identified in step 1.

EMI receiver settings:

- Detector: Quasi-Peak
- IF - Bandwidth: 9 kHz
- Measuring time: 1 s / frequency

At each frequency determined in step 1, four measurements are performed in the following combinations:

- 1) Neutral lead - reference ground (PE grounded)
- 2) Phase lead - reference ground (PE grounded)
- 3) Neutral lead - reference ground (PE floating)
- 4) Phase lead - reference ground (PE floating)

The highest value is reported.

#### Test Requirements / Limits

If not stated within the measurement plot and/or test result, class B limits are applied.

FCC Part 15, Subpart B, §15.107, Class B Limit

| Frequency Range (MHz) | QP Limit (dB $\mu$ V) | AV Limit (dB $\mu$ V) |
|-----------------------|-----------------------|-----------------------|
| 0.15 – 0.5            | 66 to 56              | 56 to 46              |
| 0.5 – 5               | 56                    | 46                    |
| 5 – 30                | 60                    | 50                    |

FCC Part 15, Subpart B, §15.107, Class A Limit

| Frequency Range (MHz) | QP Limit (dBµV) | AV Limit (dBµV) |
|-----------------------|-----------------|-----------------|
| 0.15 - 0.5            | 79              | 66              |
| 0.5 - 30              | 73              | 60              |

Used conversion factor: Limit (dBµV) = 20 log (Limit (µV)/1µV).

#### NOTES:

A missing result table in the corresponding test report section means, that no final measurement was performed because no relevant frequencies (peaks) were found in the preliminary scan.

The chosen operating mode is selected as representative mode to generate "worst-case" conditions, i.e. high power consumption.

#### Spurious radiated emissions

Standard FCC Part 15, Subpart B

The test was performed according to: ANSI C 63.4, 2009

#### Test Description

Measurement below 1 GHz:

The test set-up was made in accordance to the general provisions of ANSI C 63.4-2009.

The Equipment Under Test (EUT) was set up on a non-conductive table 1.0 x 2.0 m in the semi-anechoic chamber. The influence of the EUT support table that is used between 30–1000 MHz was evaluated.

The test was performed at the distance of 3 m between the EUT and the receiving antenna. The measurement procedure is implemented into the EMI test software ES-K1 from R&S. The radiated emissions measurements were made in a typical installation configuration. Exploratory tests are performed at 3 orthogonal axes to determine the worst-case orientation of a body-worn or handheld EUT. The final test on all kind of EUTs is performed at 2 axes. A pre-check is also performed while the EUT is powered from both AC and DC (battery) power in order to find the worst-case operating condition.

Step 1: Preliminary scan (test to identify the highest amplitudes relative to the limit)

Intention of this step is, to determine the radiated EMI-profile of the EUT.

Settings for step 1:

- Detector: Peak-Maxhold
- Frequency range: 30 – 1000 MHz
- Frequency steps: 60 kHz
- IF-Bandwidth: 120 kHz
- Measuring time / Frequency step: 100 µs
- Turntable angle range: –180° to +180°
- Turntable step size: 90°
- Height variation range: 1 – 3 m
- Height variation step size: 2 m
- Polarisation: Horizontal + Vertical

On basis of this preliminary scan the highest amplitudes and the corresponding frequencies relative to the limit are identified. Emissions above the limit and emissions which are in the 10 dB range below the limit are considered.

Step 2:

A further measurement will be performed on the frequencies determined in step 1. Intention of this step is, to find out the approximate turntable angle and antenna height for each frequency.

Settings for step 2:

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range: –180° to +180°

- Turntable step size: 45°
- Height variation range: 1 – 4 m
- Height variation step size: 0.5 m
- Polarisation: horizontal + vertical

After this step the EMI test system has determined the following values for each frequency (of step 1):

- Frequency
- Azimuth value (of turntable)
- Antenna height

The last two values have now the following accuracy:

- Azimuth value (of turntable): 45°
- Antenna height: 0.5 m

#### Step 3: final measurement

In this step the accuracy of the turntable azimuth and antenna height will be improved. This is necessary to find out the maximum value of every frequency.

For each frequency, which was determined the turntable azimuth and antenna height will be adjusted. The turntable azimuth will be slowly varied by +/- 22.5° around this value. During this action the value of emission is continuously measured. The turntable azimuth at the highest emission will be recorded and adjusted. In this position the antenna height is also slowly varied by +/- 25 cm around the antenna height determined. During this action the value of emission is also continuously measured. The antenna height of the highest emission will also be recorded and adjusted.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100ms
- Turntable angle range: -22.5° to +22.5° around the determined value
- Height variation range: -0.25 m to +0.25 m around the determined value

#### Step 4: Final measurement (with QP detector)

With the settings determined in step 3, the final measurement will be performed:

EMI receiver settings for step 4:

- Detector: Quasi-Peak(< 1GHz)
- Measured frequencies: in step 3 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 1 s

#### Measurement above 1 GHz:

The following modifications apply to the measurement procedure for the frequency range above 1 GHz: The measurement distance was reduced to 1 m. The results were extrapolated by the extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements, inverse-linear-distance-squared for the power density measurements). Due to the fact that in this frequency range a double ridged wave guided horn antenna (up to 18 GHz) and a horn antenna (18–25 GHz) are used, the steps 2-4 as described before, are omitted. Step 1 was performed at one height of the receiving antenna only.

Detector: Peak, Average (simultaneously)

RBW = VBW = 1 MHz; above 7 GHz 100 kHz

#### Test Requirements / Limits

If not stated within the measurement plot and/or test result, class B limits are applied.

FCC Part 15, Subpart B, §15.109, Radiated Emission Limits

Frequency Range (MHz): Class B Limit (dBµV/m)

| Frequency Range (MHz) | Class B Limit (dBµV/m) |
|-----------------------|------------------------|
| 30 – 88               | 40.0                   |
| 88 – 216              | 43.5                   |
| 216 – 960             | 46.0                   |
| above 960             | 54.0                   |

| Frequency Range (MHz) | Class A Limit (dBµV/m) / @ 3m ! |
|-----------------------|---------------------------------|
| 30 - 88               | 49.5                            |
| 88 - 216              | 54.0                            |
| 216 - 960             | 56.9                            |
| above 960             | 60.0                            |


§15.35(b)

..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor:  $\text{Limit (dB}\mu\text{V/m)} = 20 \log (\text{Limit } (\mu\text{V/m})/1\mu\text{V/m})$


NOTE: A missing result table in the corresponding test report section means, that no final measurement was performed because no relevant frequencies (peaks) were found in the preliminary scan.

## Setup Drawings

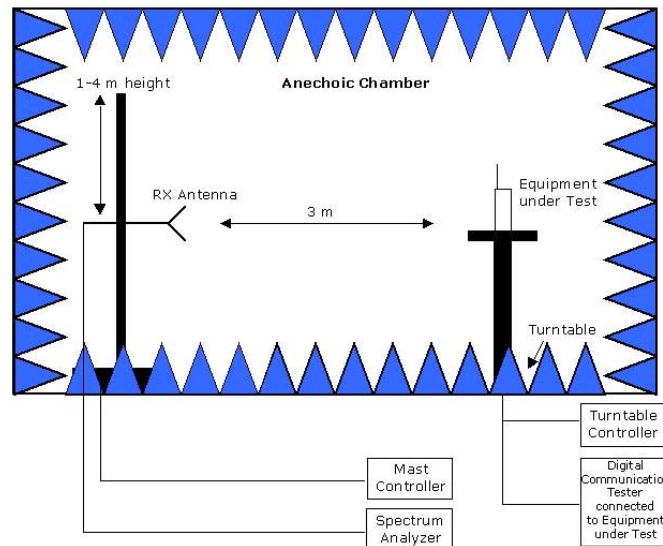

Remark: Depending on the frequency range suitable antenna types, attenuators or preamplifiers are used.

Setup in the Anechoic chamber. For measurements below 1 GHz the ground was replaced by a conducting ground plane.

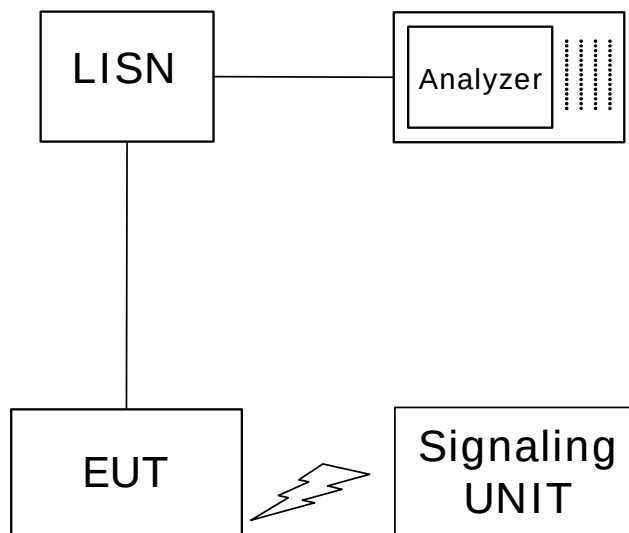

Setup in the shielded room for conducted measurements at AC mains port

---

### Correlation of measurement requirements from FCC and IC

---

| Measurement                            | FCC reference | IC reference                       |
|----------------------------------------|---------------|------------------------------------|
| Conducted Emissions<br>(AC Power Line) | §15.107       | ICES-001 or ICES-003 or<br>RSS-Gen |
| Radiated Spurious Emissions            | §15.109       | ICES-001 or ICES-003 or<br>RSS-Gen |

### Remarks:

1. FCC Part 15 subpart B, ICES 003 and CISPR 22 contain different definitions of Class A and Class B limits, i.e. which class is applicable to which kind of EUT.  
ICES 003 and CISPR 22 distinguish between the location where the EUT is intended to operate whilst FCC refers to the method of commercial distribution (distributive trades).
2. The correct assignment of the appropriate class to the concrete EUT is not scope of this test report!
3. A radio apparatus that is specifically subject to an Industry Canada Radio Standard Specification (RSS) and which contains an ITE is not subject to ICES-003 provided the ITE is used only to enable operation of the radio apparatus and the ITE does not control additional functions or capabilities.
4. ISM (Industrial, Scientific or Medical) radio frequency generators, though they may contain ITE, are excluded from the definition of ITE and are not subject to ICES-003. They are instead subject to the Interference-Causing Equipment Standard ICES-001, which specifically addresses ISM radio frequency generators.
5. The kind of EUT (ITE, ISM, Radio) determines which IC Standard is applicable.



## 6 Index

|                                                         |    |
|---------------------------------------------------------|----|
| 1 Administrative Data                                   | 2  |
| 1.1 Project Data                                        | 2  |
| 1.2 Applicant Data                                      | 2  |
| 1.3 Test Laboratory Data                                | 2  |
| 1.4 Signature of the Testing Responsible                | 2  |
| 1.5 Signature of the Accreditation Responsible          | 3  |
| 2 Test Object Data                                      | 3  |
| 2.1 General OUT Description                             | 3  |
| 2.2 Detailed Description of OUT Samples                 | 3  |
| 2.3 OUT Features                                        | 4  |
| 2.4 Auxiliary Equipment                                 | 4  |
| 2.5 Setups used for Testing                             | 4  |
| 3 Results                                               | 5  |
| 3.1 General                                             | 5  |
| 3.2 List of the Applicable Body                         | 5  |
| 3.3 List of Test Specification                          | 5  |
| 3.4 Summary                                             | 6  |
| 3.5 Detailed Results                                    | 7  |
| 3.5.1 15b.1 Conducted Emissions (AC Power Line) §15.107 | 7  |
| 3.5.2 15b.2 Spurious Radiated Emissions §15.109         | 9  |
| 4 Test Equipment Details                                | 11 |
| 4.1 List of Used Test Equipment                         | 11 |
| 5 Annex                                                 | 17 |
| 5.1 Additional Information for Report                   | 17 |
| 6 Index                                                 | 24 |