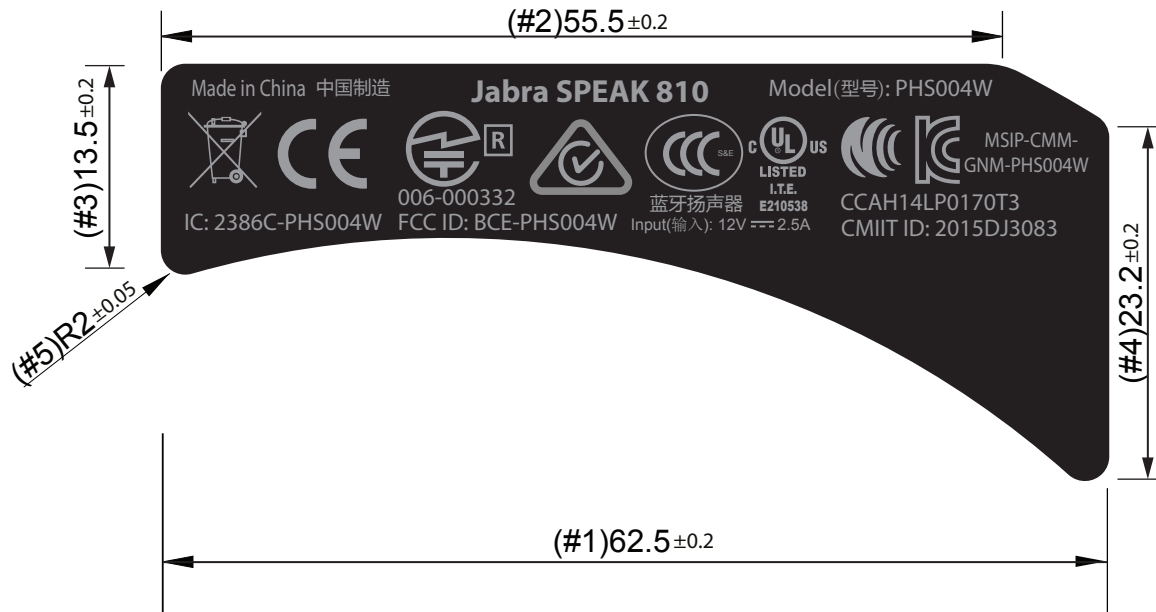


Type approval Marks:

- WEE mark 5mm high,
- CE mark 5mm high,
- Japanese mark 5mm high

**Label specification:**

Facestock: Polyester

Rear side adhesive: Acrylic, permanent, to fit ABS plastic parts

Surface: Matte

Thickness: 0.1mm +/-0.05

Printed subjects:

Always use layout file (1:1) as input

Use CE marking (min 5mm high)as reference to ensure right size

Printed symmetric to centre axis

Background: 0/0/0/100 (CMYK) - or 100% Black

Printed items: grey, 5/0/0/45 (CMYK) - or PMS430C

Finished label must be RoHS compliant

Finished label must be UL PJDQ2 compliant. UL No:MH13600

CONFIDENTIALITY NOTICE:

This document is the property of GN Netcom A/S and must be treated as confidential. The document must not be used, or disclosed to any third party, without written permission by GN Netcom A/S. Copyright © 2010 GN Netcom A/S. All rights reserved.

Process control dimensions are marked:

IQC/OQC Characteristics for Evaluation:

#

Date of Change:	Description of Change:				Responsible: initials	
	Matr. Spec: (See B.O.M.)	Cosmetic Standard: GSC.ST.00002		Issued by:	Issued:	Drawing Scale: Size:
	Matr. type:	Part Marking.: GSC.PR.00102		ECAI	25.08.15	2:1 A4
	GN PDM file:	Object type: PART	Approved by:	Approved on: dd-Mmm-yyyy	Units: mm	Projection:
Description:			Document No:	Doc. Revision:	Design Status:	Page No:
Unit Label Spec., SPK 810			83-03492	D	Released	1 of 1
A	B	C	D	E	F	