



InterLab®

Photo Report on

Test Setups

Related to the Test Reports:

- MDE_GNNET_1509_FCCa
- MDE_GNNET_1509_FCCb
- MDE_GNNET_1509_FCCc

Report Reference: MDE_GNNET_1509_FCC_Photo_Setups

Jabra SPEAK 810
PHS004W

FCC ID BCE-PHS004W
IC: 2386C-PHS004W

Test Laboratory:

7layers GmbH
Borsigstrasse 11
40880 Ratingen
Germany



Note:

The following test results relate only to the devices specified in this document. This report shall not be reproduced in parts without the written approval of the test laboratory.

7layers GmbH

Borsigstraße 11
40880 Ratingen, Germany
T +49 (0) 2102 749 0
F +49 (0) 2102 749 350

Geschäftsführer/
Managing Director:
Dr. Harald Ansorge

Registergericht/registered:
Düsseldorf HRB 75554
USt-Id.-Nr./VAT-No. DE203159652
Steuer-Nr./TAX-No. 147/5869/0385

a Bureau Veritas
Group Company

www.7layers.com



Photo 1: Test setup for conducted measurements on AC port, computer peripheral setup, EUT supplied by AC/DC adapter, USB connected, used for intentional and unintentional radiator measurements.



Photo 2: Test setup for conducted measurements on AC port, computer peripheral setup, EUT supplied by AC/DC adapter, Clinch connected, used for unintentional radiator measurements.



Photo 3: Test setup for radiated measurements in the range 30 – 1000 MHz, EUT supplied by AC/DC adapter, computer peripheral setup, used for unintentional radiator measurements.



Photo 4: Test setup for radiated measurements in the range 30 – 1000 MHz, EUT supplied by AC/DC adapter, computer peripheral setup, used for unintentional radiator measurements.

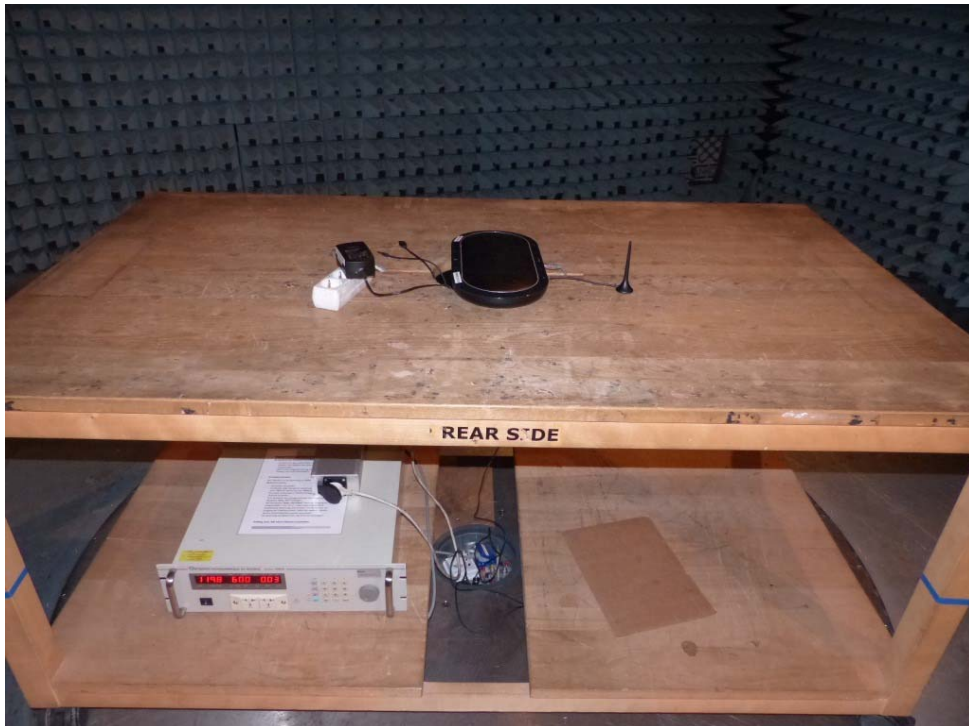


Photo 5: Test setup for radiated measurements in the range 30 – 1000 MHz, EUT supplied by AC/DC adapter, used for intentional and unintentional radiator measurements.

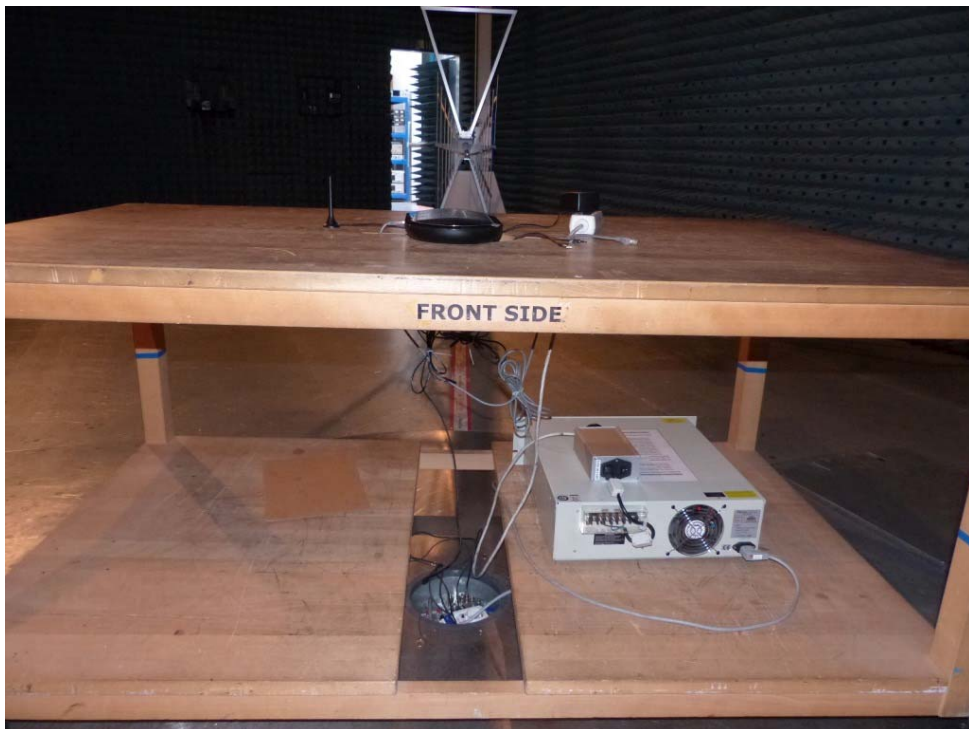


Photo 6: Test setup for radiated measurements in the range 30 – 1000 MHz, EUT supplied by AC/DC adapter, used for intentional and unintentional radiator measurements.



Photo 7: Test setup for radiated measurements below 30 MHz, used for intentional radiator measurements.

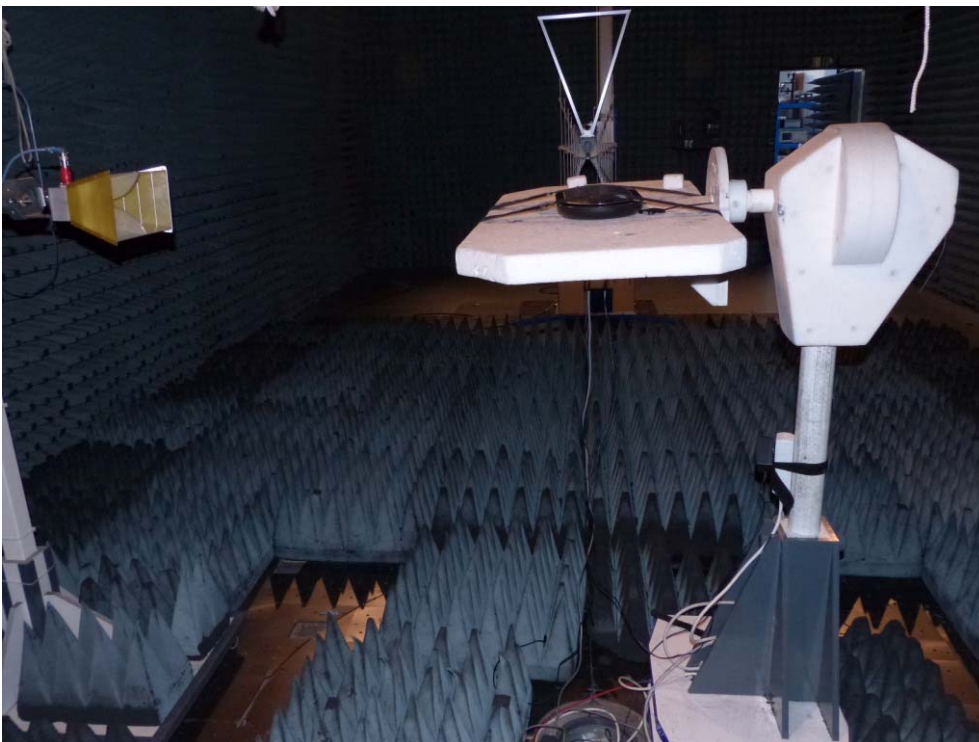


Photo 8: Test setup for radiated measurements in the range 1-18 GHz, fully-anechoic chamber, used for intentional radiator measurements.



Photo 9: Test setup for radiated measurements in the range 18 – 25 GHz, fully-anechoic chamber, used for intentional radiator measurements.