
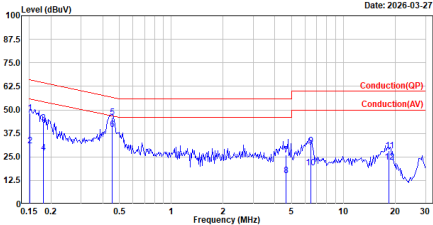
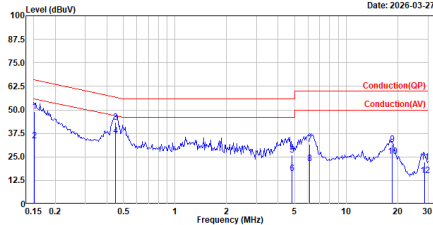


Appendix A. Test Result of AC Power Line Conducted Emission

TX_BT3M_2441MHz_Line								TX_BT3M_2441MHz_Neutral							
Site :HY-SR01 Condition :Line Mode :TX_BT3M_2441MHz test by :Kevin								Site :HY-SR01 Condition :Neutral Mode :TX_BT3M_2441MHz test by :Kevin							
															
No.	Frequency	Level	Limit	Over	Read	Factor	Remark	No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV	dBuV	dB	dBuV	dB			MHz	dBuV	dBuV	dB	dBuV	dB	
1	0.152	48.39	65.91	-17.52	38.82	9.57	QP	1	0.151	49.22	65.93	-16.71	39.66	9.56	QP
2	0.152	31.08	55.91	-24.83	21.51	9.57	Average	2	0.151	33.74	55.93	-22.19	24.18	9.56	Average
3	0.181	42.88	64.42	-21.54	33.32	9.56	QP	3	0.452	43.55	56.85	-13.30	33.96	9.59	QP
4	0.181	27.07	54.42	-27.35	17.51	9.56	Average	4	0.452	36.22	46.85	-10.63	26.63	9.59	Average
5	0.456	45.87	56.76	-10.89	36.88	9.59	QP	5	4.815	25.92	56.00	-30.08	15.87	10.05	QP
6	0.456	39.51	46.76	-7.25	29.92	9.59	Average	6	4.815	16.15	46.00	-29.85	6.10	10.05	Average
7	4.658	26.06	56.00	-29.94	16.04	10.02	QP	7	6.083	31.54	60.00	-28.46	21.43	10.11	QP
8	4.658	15.19	46.00	-30.81	5.17	10.02	Average	8	6.083	21.33	50.00	-28.67	11.22	10.11	Average
9	6.439	30.77	60.00	-29.23	20.67	10.10	QP	9	18.494	31.59	60.00	-28.41	21.61	9.98	QP
10	6.439	19.20	50.00	-30.80	9.10	10.10	Average	10	18.494	25.34	50.00	-24.66	15.36	9.98	Average
11	18.436	28.21	60.00	-31.79	18.40	9.81	QP	11	28.582	22.31	60.00	-37.69	12.19	10.12	QP
12	18.436	22.15	50.00	-27.85	12.34	9.81	Average	12	28.582	14.97	50.00	-35.03	4.85	10.12	Average
Note: 1. Level = Read Level + Factor 2. Factor = LISN insertion loss + Cable loss 3. Over Limit = Level - Limit Line								Note: 1. Level = Read Level + Factor 2. Factor = LISN insertion loss + Cable loss 3. Over Limit = Level - Limit Line							


Appendix B. Test Result of 20dB Bandwidth

Modulation	Frequency (MHz)	20dB Bandwidth (MHz)	Limit (MHz)
GFSK	2402	0.93	-
	2441	0.93	-
	2480	0.93	-
8DPSK	2402	1.29	-
	2441	1.29	-
	2480	1.29	-

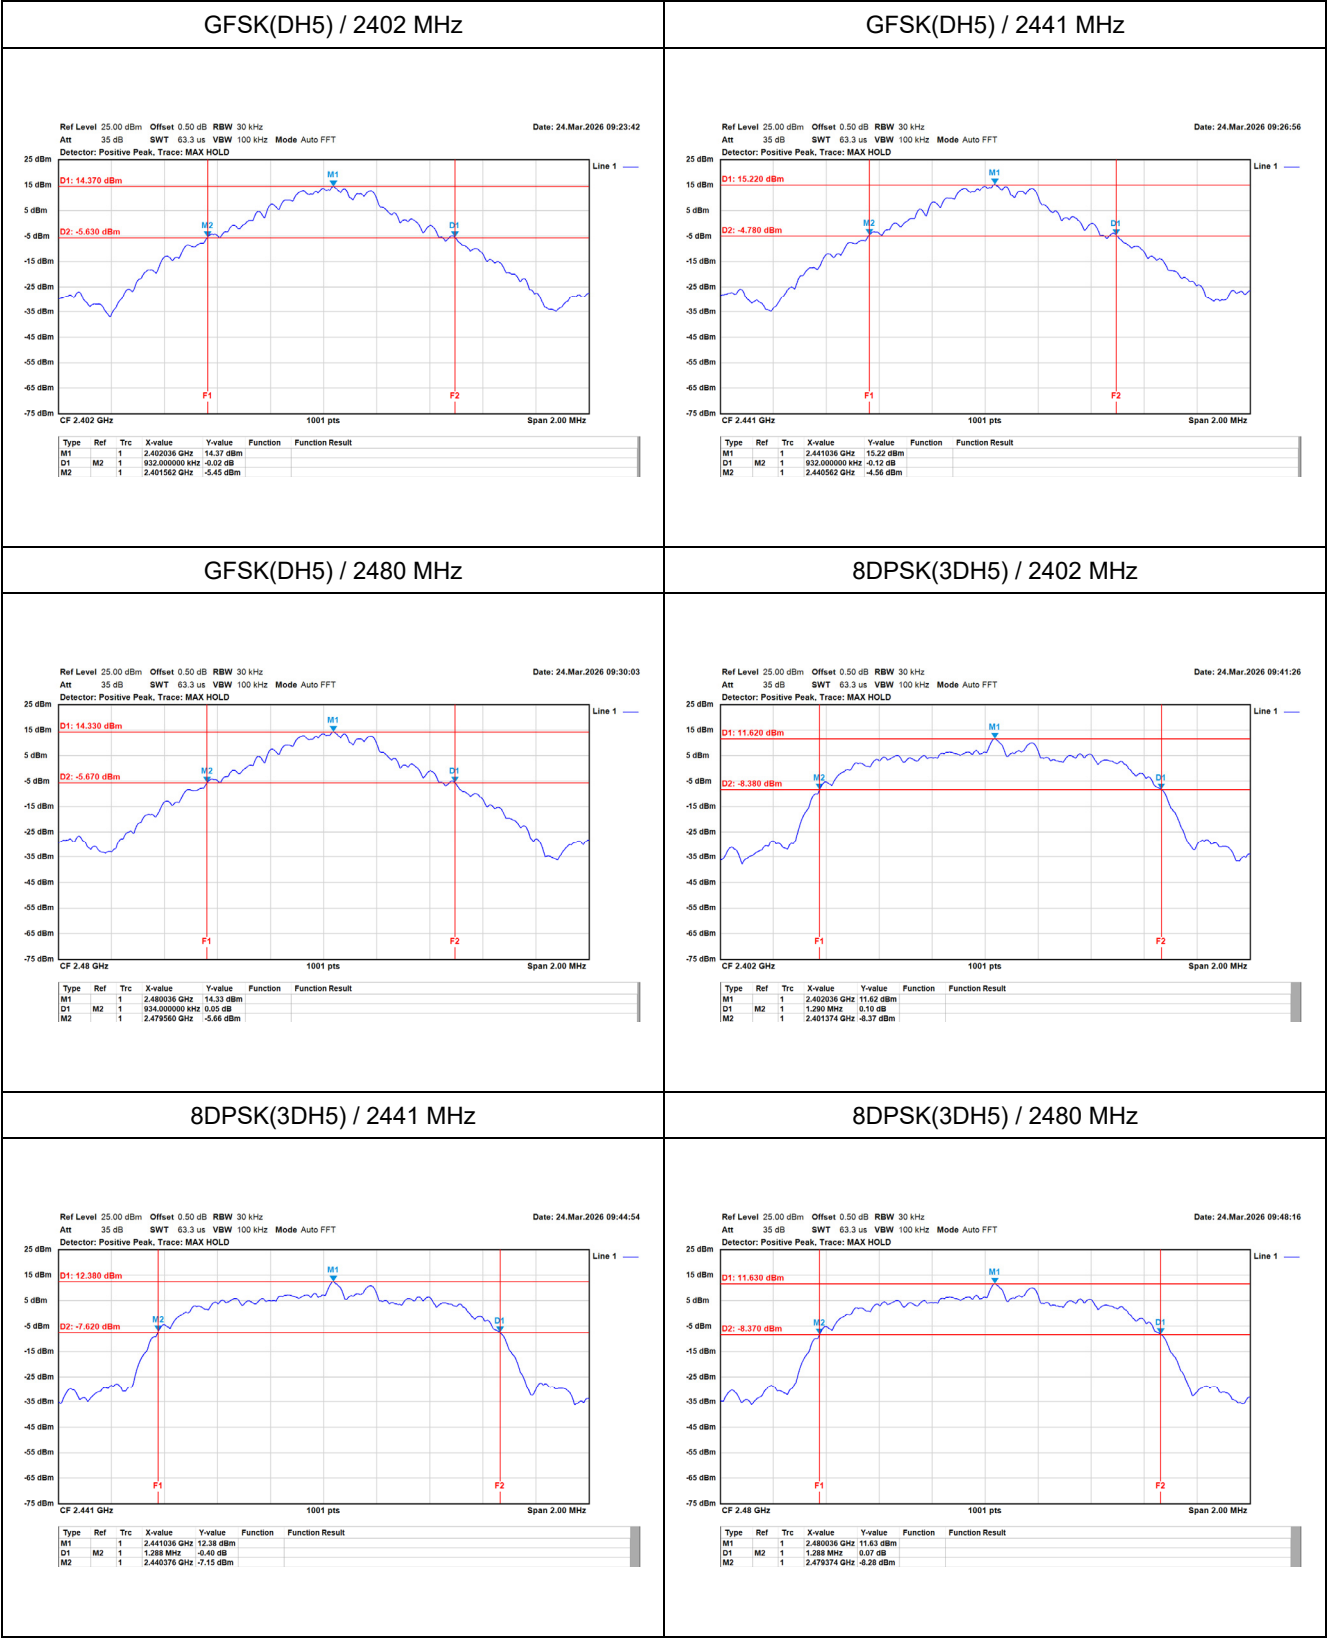

Appendix C. Test Result of Carrier Frequency Separation

Modulation	Frequency (MHz)	Measure Level (MHz)	Limit (MHz)	Result
GFSK	2402	1.00	0.621	Pass
	2441	1.00	0.621	Pass
	2480	1.00	0.623	Pass
8DPSK	2402	1.00	0.860	Pass
	2441	0.99	0.859	Pass
	2480	0.99	0.859	Pass

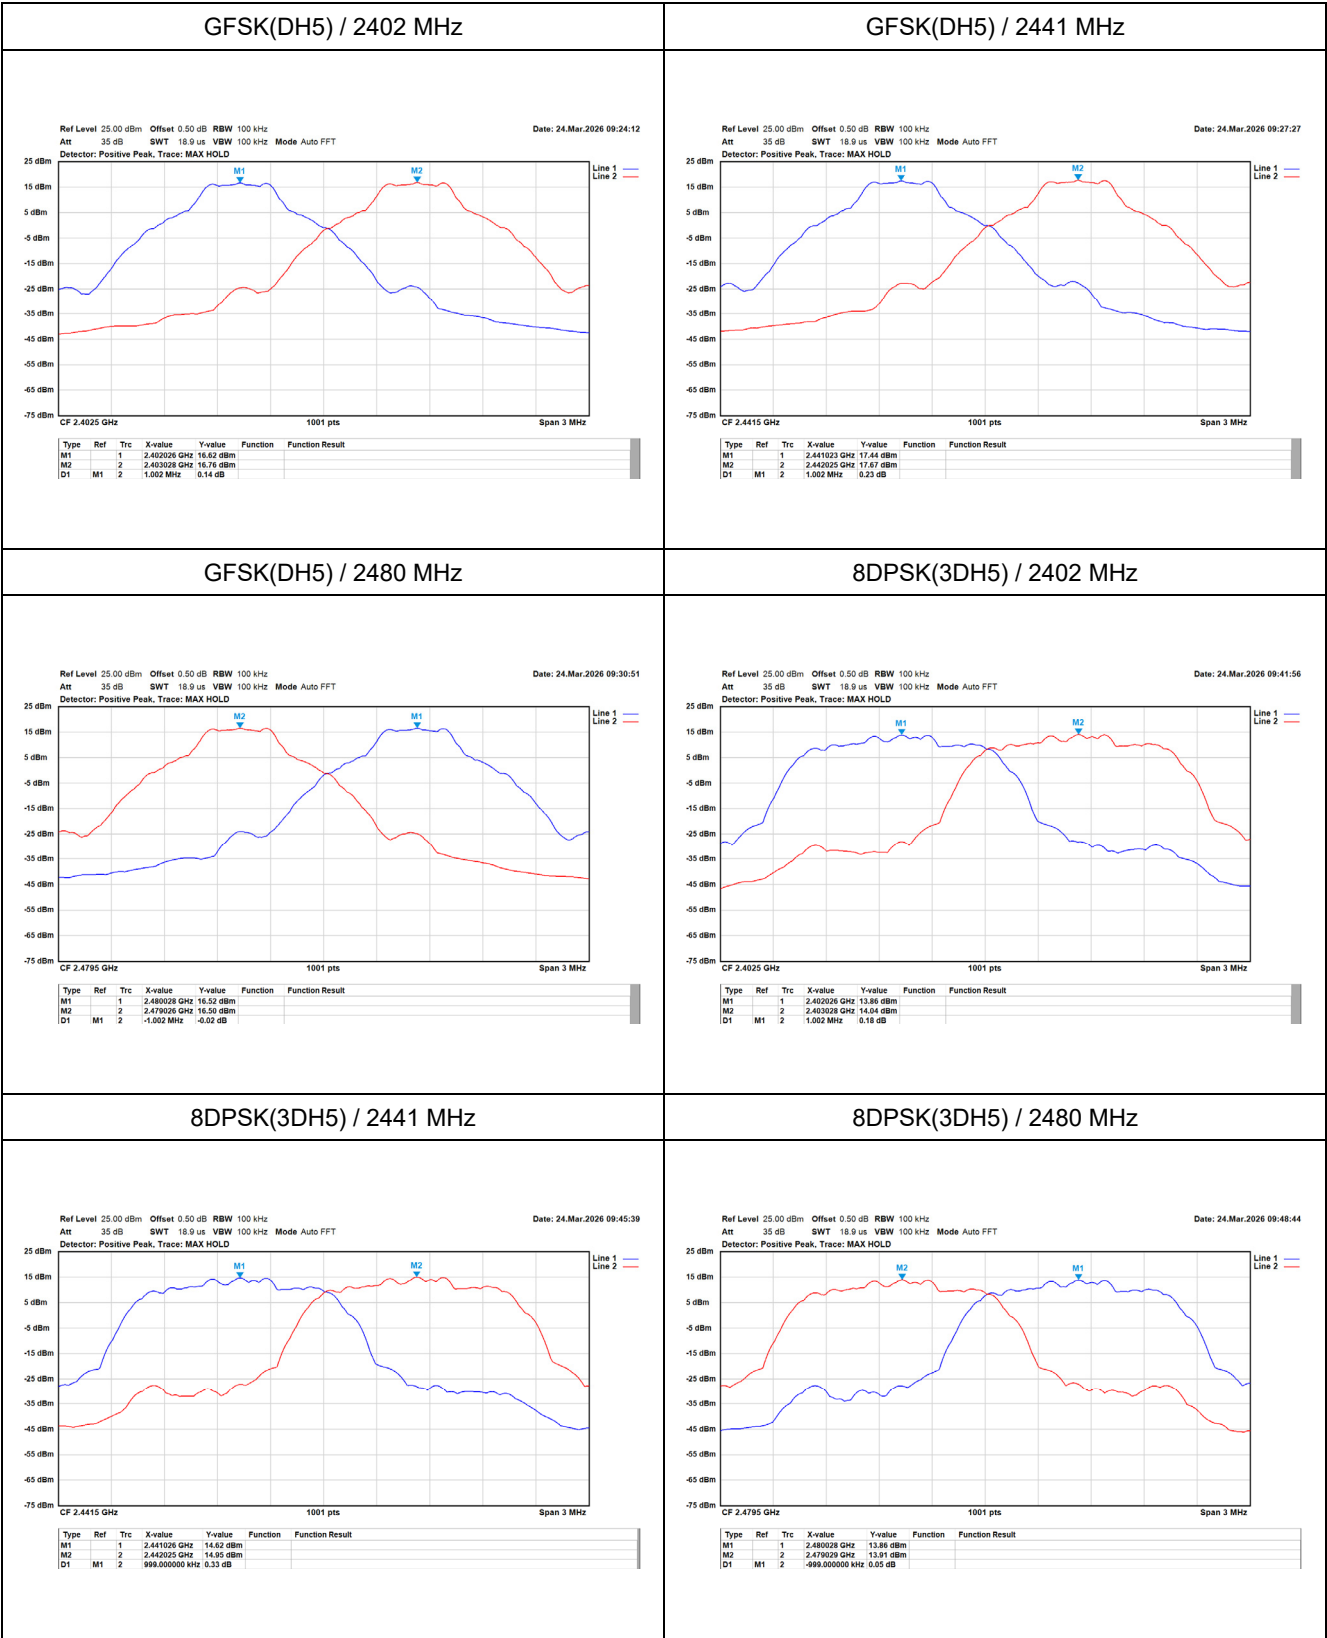


Appendix D. Test Result of Maximum Peak Conducted Output Power

Modulation	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)	Limit (dBm)	Result
GFSK	2402	18.61	21.00	Pass
	2441	19.31	21.00	Pass
	2480	18.46	21.00	Pass
8DPSK	2402	17.83	21.00	Pass
	2441	18.45	21.00	Pass
	2480	17.60	21.00	Pass


Appendix E. Test Result of Number of Hopping Frequency

Frequency (MHz)	Measure Level (Channels)	Limit (Channels)
2402.0 ~ 2480.0	79	≥ 15

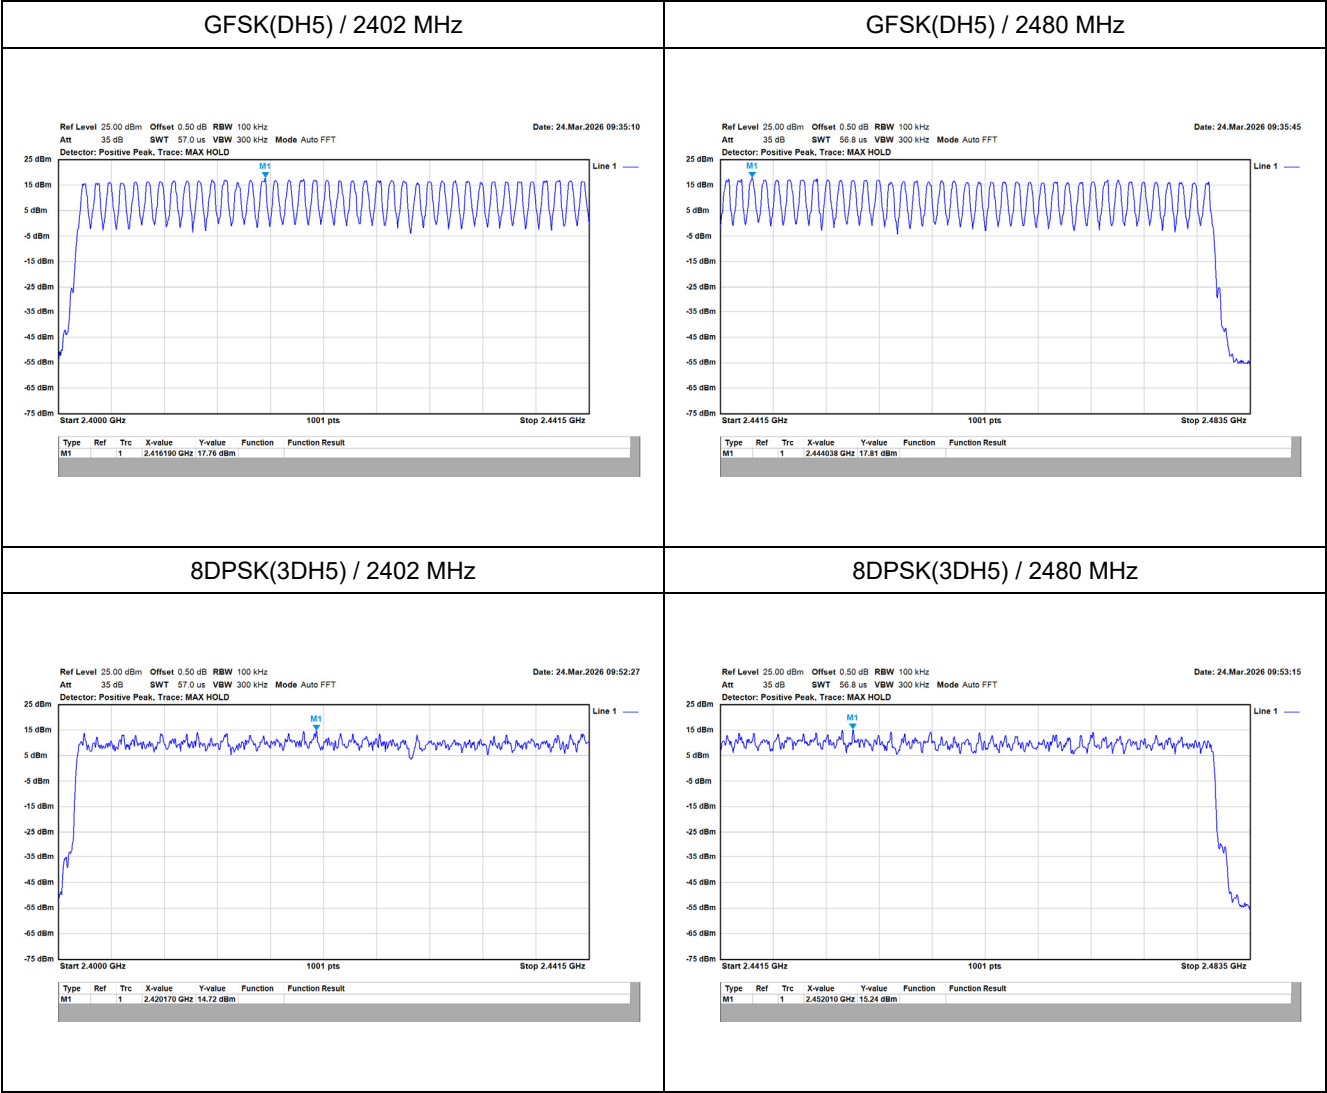


Appendix F. Test Result of Dwell Time


Modulation	Occupancy Time of Frequency Hopping System
GFSK	A) 2402 MHz Test Time Period: $0.4 \times 79 = 31.60$ sec, Time slot length :2.87 = 0.002870 sec
	Dwell Time : $0.002870 \times (266.67/79) \times 31.60 = 0.306$ sec °
	B) 2441 MHz Test Time Period: $0.4 \times 79 = 31.60$ sec, Time slot length :2.87 = 0.002870 sec
	Dwell Time : $0.002870 \times (266.67/79) \times 31.60 = 0.306$ sec °
	C) 2480 MHz Test Time Period: $0.4 \times 79 = 31.60$ sec, Time slot length :2.87 = 0.002870 sec
	Dwell Time : $0.002870 \times (266.67/79) \times 31.60 = 0.306$ sec °
8DPSK	A) 2402 MHz Test Time Period: $0.4 \times 79 = 31.60$ sec, Time slot length :2.87 = 0.002870 sec
	Dwell Time : $0.002870 \times (266.67/79) \times 31.60 = 0.306$ sec °
	B) 2441 MHz Test Time Period: $0.4 \times 79 = 31.60$ sec, Time slot length :2.87 = 0.002870 sec
	Dwell Time : $0.002870 \times (266.67/79) \times 31.60 = 0.306$ sec °
	C) 2480 MHz Test Time Period: $0.4 \times 79 = 31.60$ sec, Time slot length :2.87 = 0.002870 sec
	Dwell Time : $0.002870 \times (266.67/79) \times 31.60 = 0.306$ sec °
Test Result: The occupancy time of each highest, middle and lowest channel is less than 0.4 sec, and corresponds to the standard.	

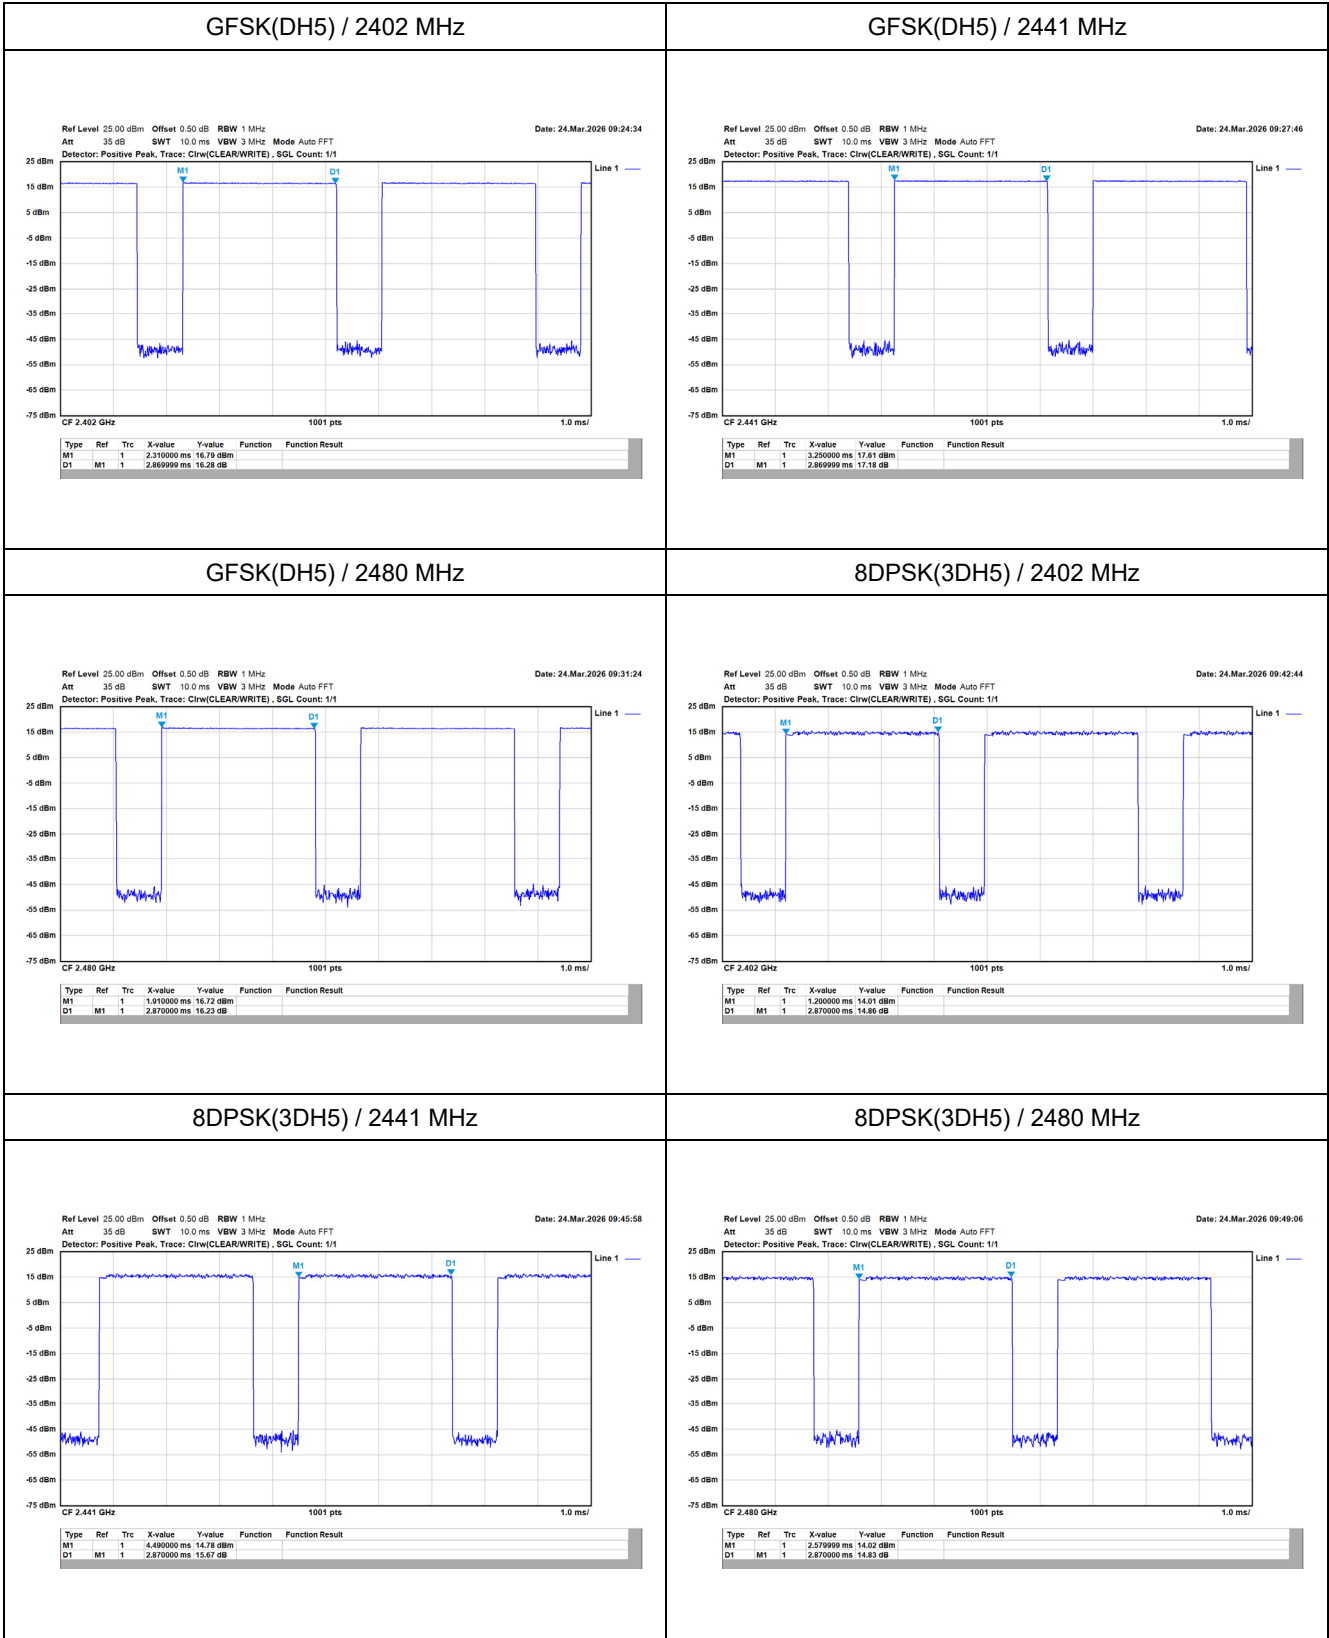


Appendix G. Test Result of Antenna Port Conducted Emission

Modulation	Measurement Level Δ (dB)	Result
GFSK	> 20	PASS
8DPSK	> 20	PASS

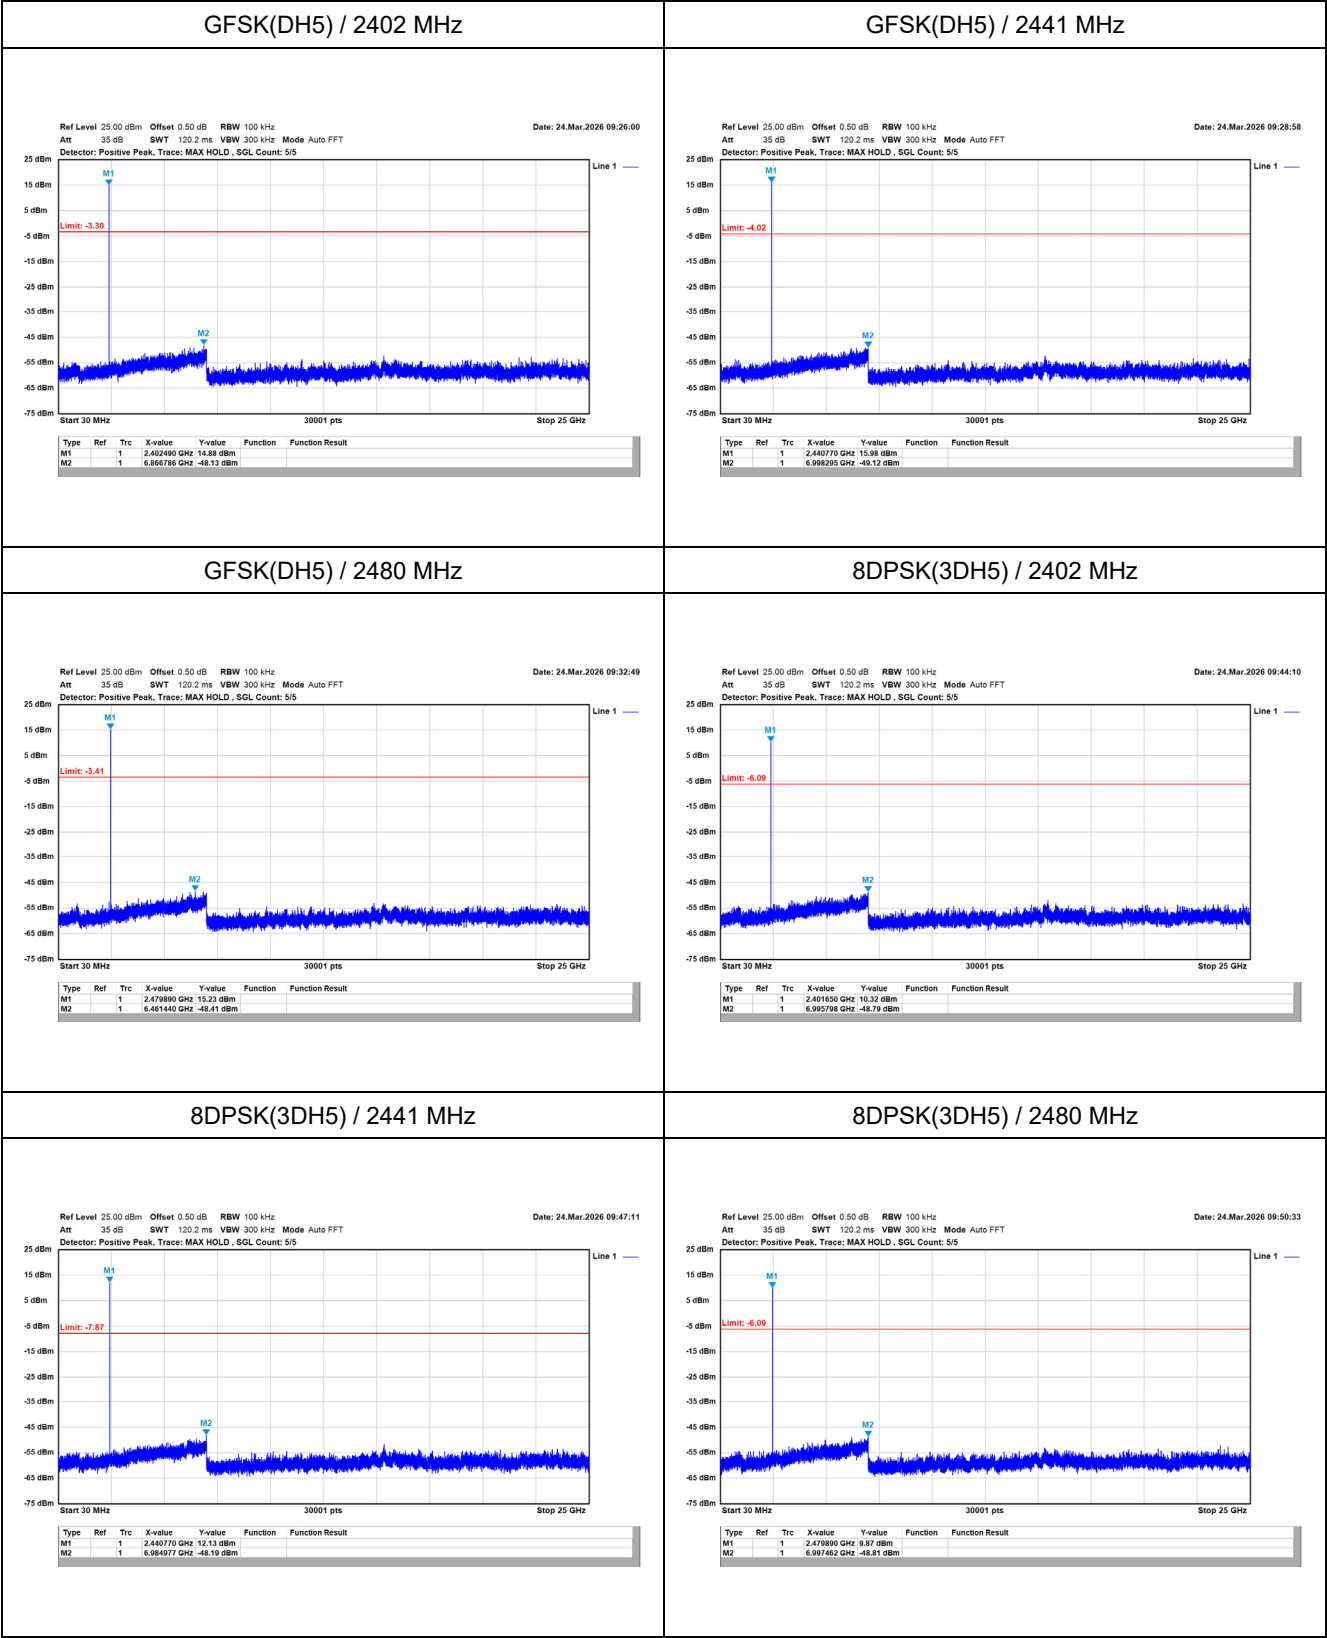


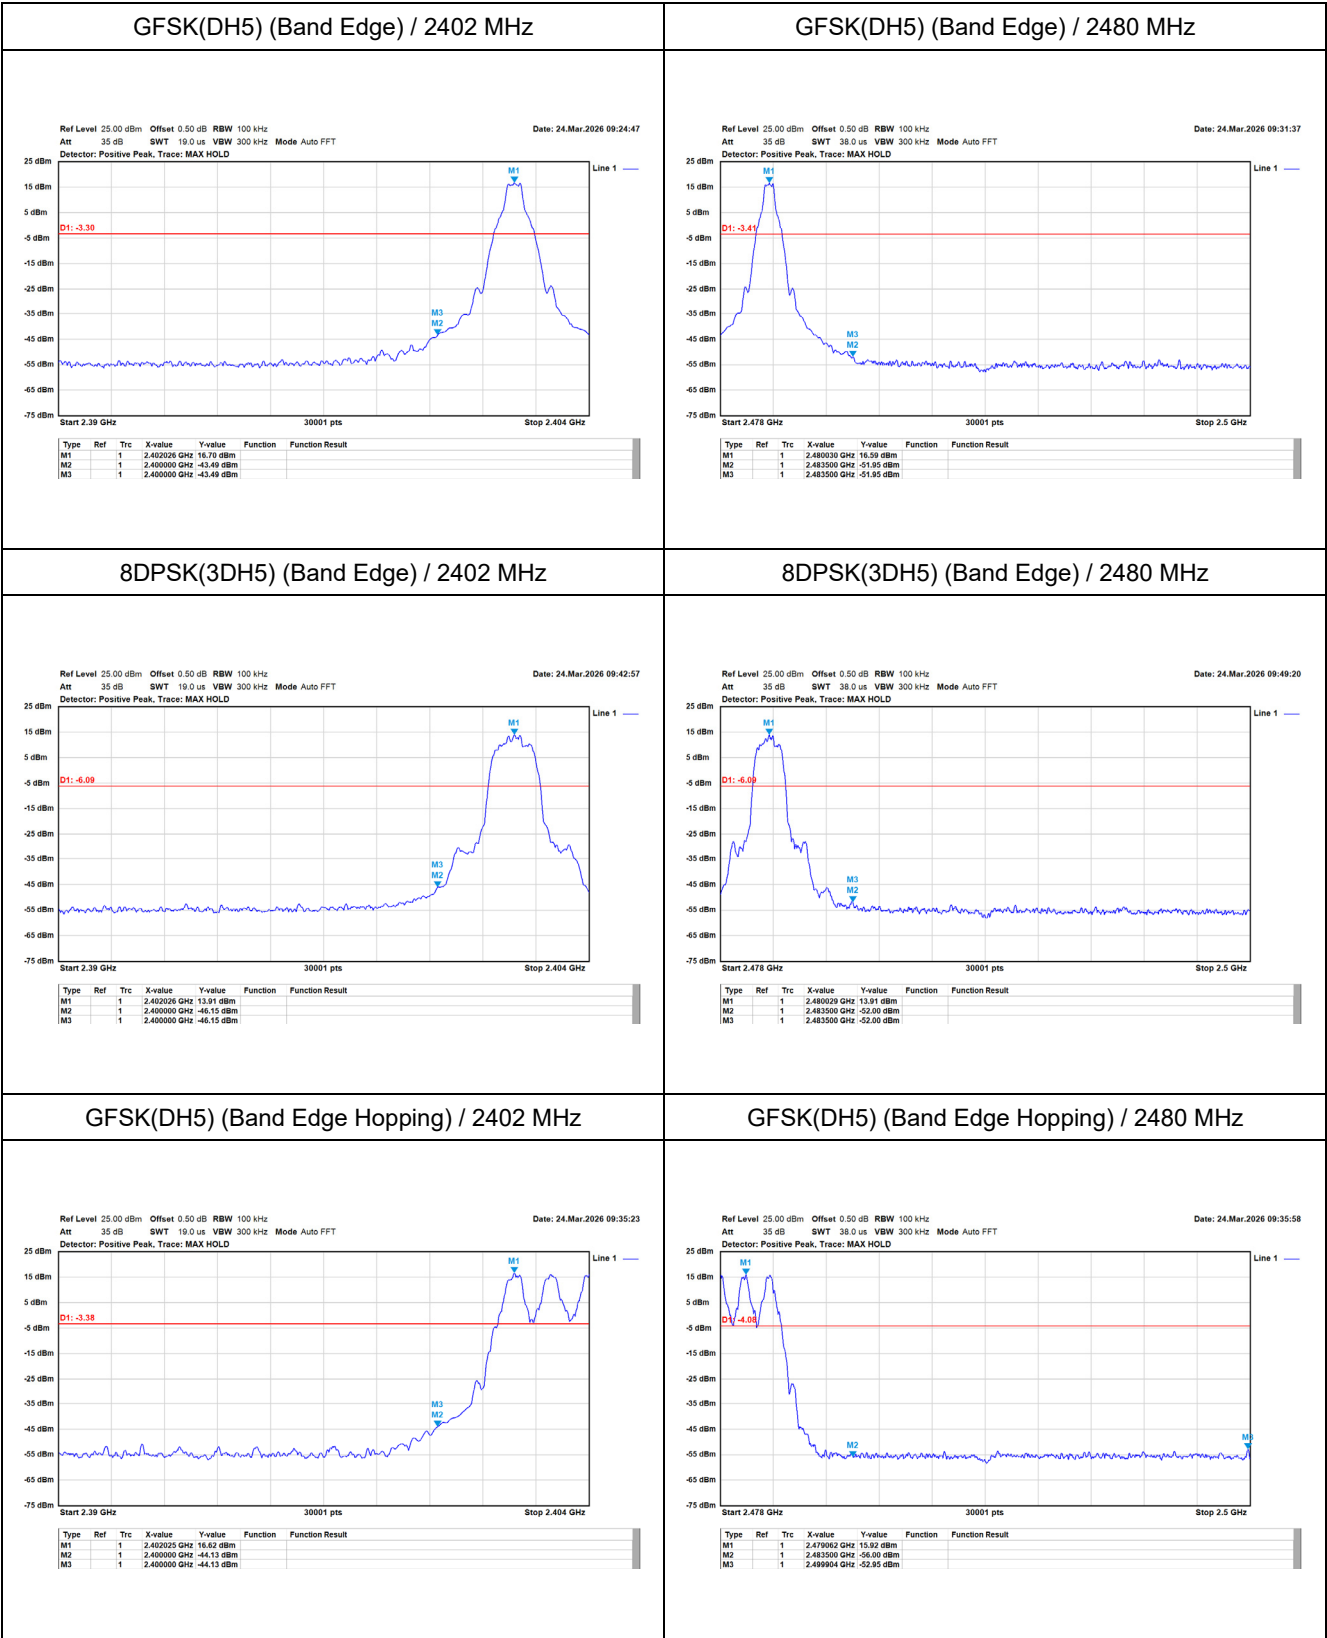

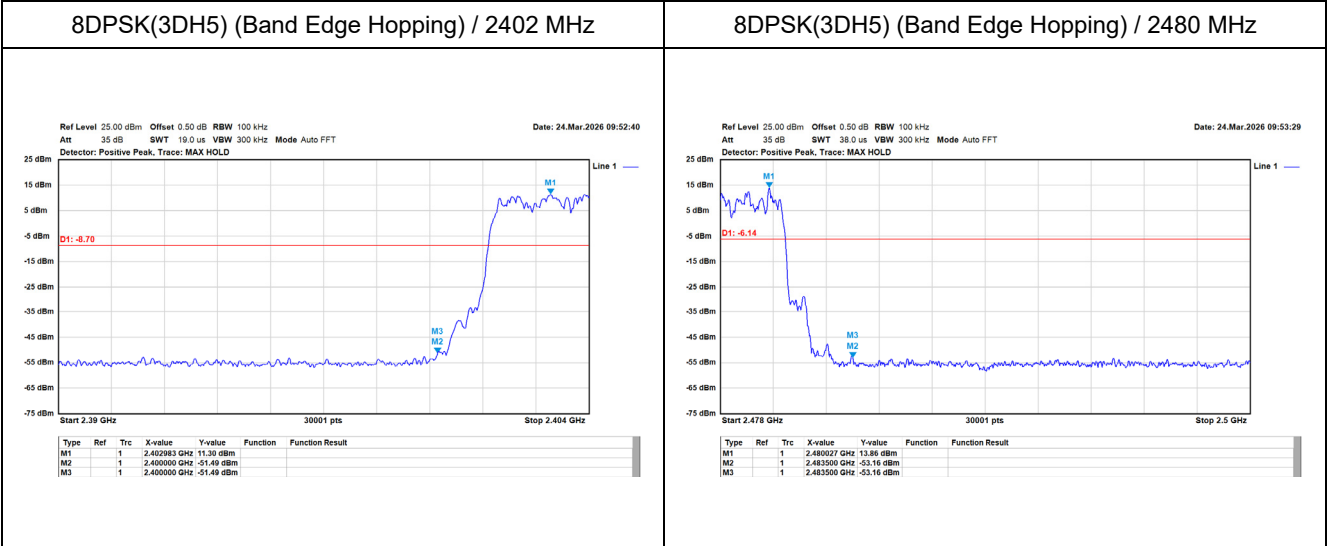

Appendix H. Test Result of Radiated Emission**TX_BT1M_2402MHz_H**

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_BT1M_2402MHz
Test by :Bob Chiu

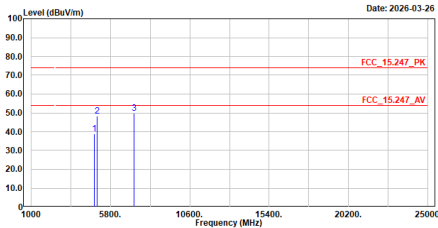


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	4804.000	38.90	74.00	-35.10	51.03	-12.13	Peak
2	4993.938	48.29	74.00	-25.71	59.44	-11.15	Peak
3	7206.000	49.64	74.00	-24.36	54.90	-5.26	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BT1M_2402MHz_V

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_BT1M_2402MHz
Test by :Bob Chiu

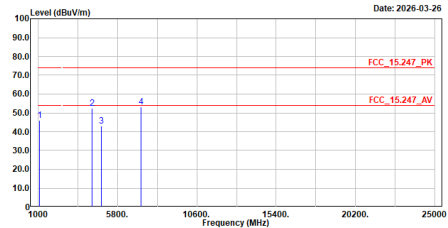


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	1064.813	46.21	74.00	-27.79	70.52	-24.31	Peak
2	4258.156	52.37	74.00	-21.63	67.52	-15.15	Peak
3	4804.000	42.87	74.00	-31.13	55.00	-12.13	Peak
4	7206.000	53.31	74.00	-20.69	58.57	-5.26	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BT1M_2441MHz_H

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_BT1M_2441MHz
Test by :Bob Chiu

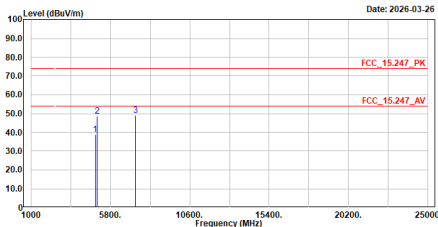


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	4882.000	39.05	74.00	-34.95	50.74	-11.69	Peak
2	4983.844	48.82	74.00	-25.18	60.02	-11.20	Peak
3	7323.000	49.06	74.00	-24.94	54.12	-5.06	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BT1M_2441MHz_V

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_BT1M_2441MHz
Test by :Bob Chiu

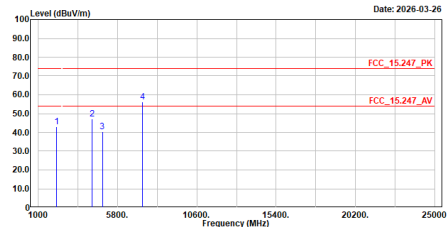


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2127.844	42.95	74.00	-31.05	64.29	-21.34	Peak
2	4248.594	47.28	74.00	-26.72	62.47	-15.19	Peak
3	4882.000	40.27	74.00	-33.73	51.96	-11.69	Peak
4	7323.000	56.16	74.00	-17.84	61.22	-5.06	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BT1M_2480MHz_H

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_BT1M_2480MHz
Test by :Bob Chiu

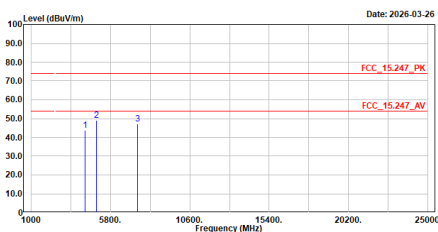


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4256.031	43.59	74.00	-30.41	58.75	-15.16	Peak
2	4960.000	48.94	74.00	-25.06	60.23	-11.29	Peak
3	7440.000	47.09	74.00	-26.91	52.19	-5.10	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BT1M_2480MHz_V

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_BT1M_2480MHz
Test by :Bob Chiu

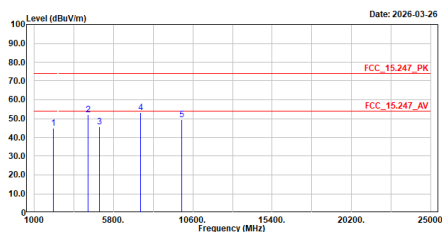


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2133.688	44.91	74.00	-29.09	66.23	-21.32	Peak
2	4248.594	51.94	74.00	-22.06	67.13	-15.19	Peak
3	4960.000	45.68	74.00	-28.32	56.97	-11.29	Peak
4	7440.000	53.15	74.00	-20.85	58.25	-5.10	Peak
5	9920.000	49.27	74.00	-24.73	55.16	-5.89	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BT3M_2402MHz_H

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_BT3M_2402MHz
Test by :Bob Chiu

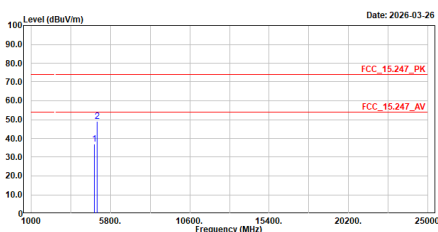


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4804.000	36.82	74.00	-37.18	48.95	-12.13	Peak
2	4993.938	49.05	74.00	-24.95	60.20	-11.15	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BT3M_2402MHz_V

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_BT3M_2402MHz
Test by :Bob Chiu

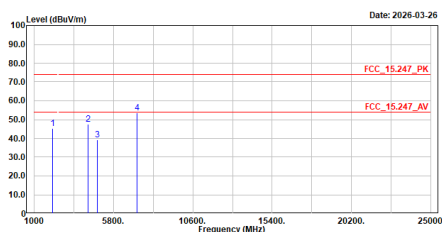


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2124.125	45.38	74.00	-28.62	66.76	-21.38	Peak
2	4264.531	47.36	74.00	-26.64	62.48	-15.12	Peak
3	4804.000	39.42	74.00	-34.58	51.55	-12.13	Peak
4	7200.000	53.47	74.00	-20.53	58.73	-5.26	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BT3M_2441MHz_H

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_BT3M_2441MHz
Test by :Bob Chiu

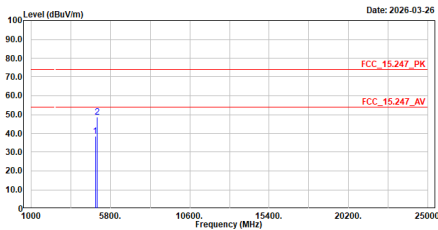


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4882.000	38.40	74.00	-35.60	50.09	-11.69	Peak
2	4997.656	48.73	74.00	-25.27	59.86	-11.13	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BT3M_2441MHz_V

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_BT3M_2441MHz
Test by :Bob Chiu

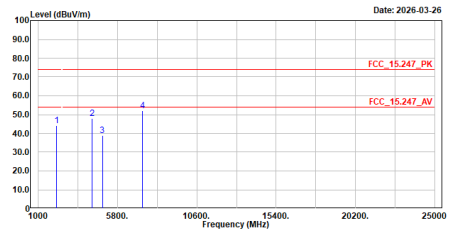


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2127.313	44.21	74.00	-29.79	65.56	-21.35	Peak
2	4259.219	47.94	74.00	-26.06	63.09	-15.15	Peak
3	4882.000	38.69	74.00	-35.31	50.38	-11.69	Peak
4	7323.000	52.09	74.00	-21.91	57.15	-5.06	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BT3M_2480MHz_H

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_BT3M_2480MHz
Test by :Bob Chiu

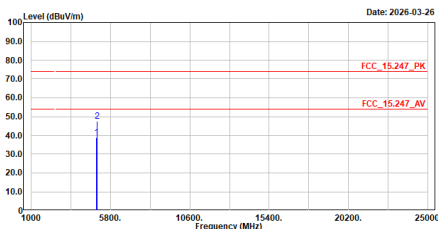


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4960.000	38.91	74.00	-35.09	50.20	-11.29	Peak
2	4981.188	47.70	74.00	-26.30	58.91	-11.21	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BT3M_2480MHz_V

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_BT3M_2480MHz
Test by :Bob Chiu

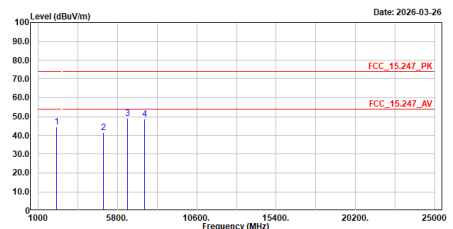


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2124.125	44.66	74.00	-29.34	66.04	-21.38	Peak
2	4960.000	41.45	74.00	-32.55	52.74	-11.29	Peak
3	6394.044	48.95	74.00	-25.05	54.78	-5.83	Peak
4	7440.000	48.76	74.00	-25.24	53.86	-5.10	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BT3M_2441MHz_H

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_BT3M_2441MHz
Test by :Nova

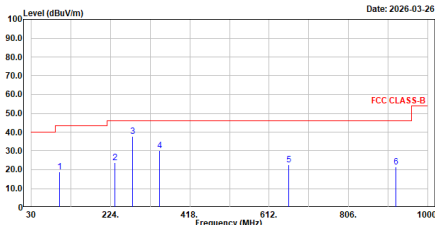


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	98.604	18.89	43.50	-24.61	34.41	-15.52	QP
2	234.311	23.86	46.00	-22.14	36.50	-12.64	QP
3	277.813	37.84	46.00	-8.16	48.80	-10.96	QP
4	344.166	30.24	46.00	-15.76	39.55	-9.31	QP
5	660.583	22.64	46.00	-23.36	25.37	-2.73	QP
6	922.046	21.64	46.00	-24.36	21.06	0.58	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_BT3M_2441MHz_V

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_BT3M_2441MHz
Test by :Nova

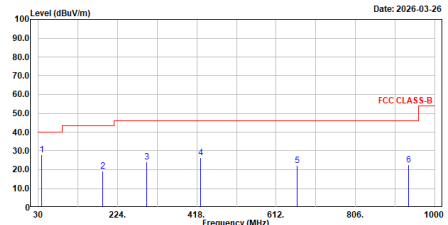


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	38.100	27.76	40.00	-12.24	38.29	-10.53	QP
2	188.108	19.10	43.50	-24.40	32.52	-13.42	QP
3	294.664	24.17	46.00	-21.83	34.70	-10.53	QP
4	427.121	26.35	46.00	-19.65	33.60	-7.25	QP
5	663.383	22.28	46.00	-23.72	24.94	-2.66	QP
6	936.547	22.69	46.00	-23.31	21.94	0.75	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_BT1M_2402MHz_H_Peak

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_BT1M_2402MHz
Test by :Bob Chiu

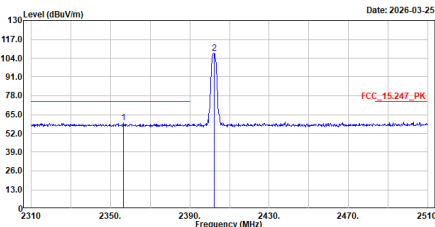


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2356.400	59.45	74.00	-14.55	29.26	30.19	Peak
2	2402.200	107.64	-----	-----	77.52	30.12	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BT1M_2402MHz_V_Peak

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_BT1M_2402MHz
Test by :Bob Chiu

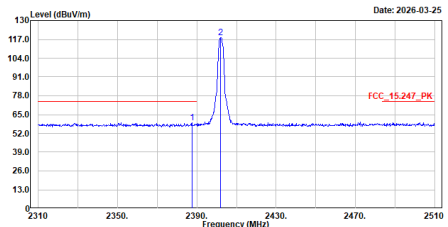


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2387.600	59.21	74.00	-14.79	29.00	30.21	Peak
2	2402.000	118.45	-----	-----	88.33	30.12	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BT1M_2480MHz_H_Peak

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_BT1M_2480MHz
Test by :Bob Chiu

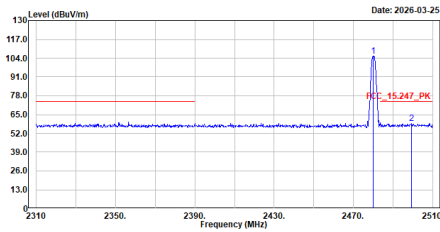


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2480.000	105.24	-----	-----	75.16	30.08	Peak
2	2499.400	58.63	74.00	-15.37	28.44	30.19	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BT1M_2480MHz_V_Peak

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_BT1M_2480MHz
Test by :Bob Chiu

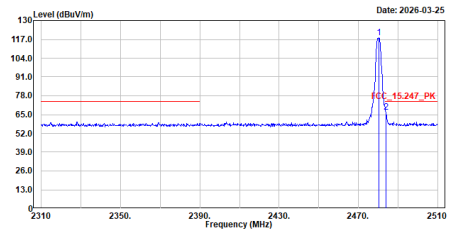


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2480.200	117.99	-----	-----	87.91	30.08	Peak
2	2483.800	66.85	74.00	-7.15	36.73	30.12	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BT3M_2402MHz_H_Peak

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_BT3M_2402MHz
Test by :Bob Chiu

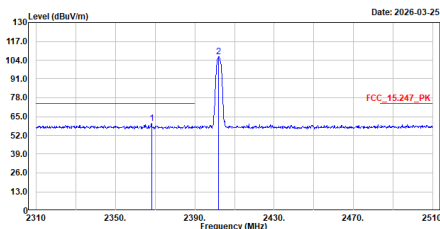


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2368.200	60.17	74.00	-13.83	30.05	30.12	Peak
2	2402.000	106.47	-----	-----	76.35	30.12	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BT3M_2402MHz_V_Peak

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_BT3M_2402MHz
Test by :Bob Chiu

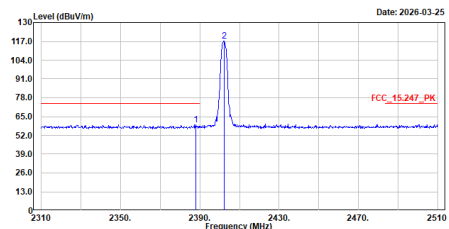

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2388.000	59.48	74.00	-14.52	29.27	30.21	Peak
2	2402.200	117.32	-----	-----	87.20	30.12	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BT3M_2480MHz_H_Peak

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_BT3M_2480MHz
Test by :Bob Chiu

Level (dBuV/m)

130

117.0

104.0

91.0

78.0

65.0

52.0

39.0

26.0

13.0

0

Frequency (MHz)

2310

2350.

2390.

2430.

2470.

2510

Date: 2026-03-25

1

15.247_PK

2

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2480.200	104.16	-----	-----	74.08	30.08	Peak
2	2498.400	58.93	74.00	-15.07	28.74	30.19	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BT3M_2480MHz_V_Peak

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_BT3M_2480MHz
Test by :Bob Chiu

Level (dBuV/m)

130

117.0

104.0

91.0

78.0

65.0

52.0

39.0

26.0

13.0

0

Frequency (MHz)

2310

2350.

2390.

2430.

2470.

2510

Date: 2026-03-25

1

15.247_PK

2

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2480.000	116.96	-----	-----	86.88	30.08	Peak
2	2483.600	64.63	74.00	-9.37	34.51	30.12	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Calculating Average Emission

Horizontal Polarization for Average Detector:

Modulation	Channel No.	Frequency (MHz)	Peak Measurement (dB μ V/m)	Duty Cycle Factor (dB)	Measurement Level (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)
GFSK	0	2356.4	59.45	-30.752	28.698	-25.302	54
		2402.2	107.64	-30.752	76.888	--	--
	78	2480.0	105.24	-30.752	74.488	--	--
		2499.4	58.63	-30.752	27.878	-26.122	54
8DPSK	0	2368.2	60.17	-30.752	29.418	-24.582	54
		2402.0	106.47	-30.752	75.718	--	--
	78	2480.2	104.16	-30.752	73.408	--	--
		2498.4	58.93	-30.752	28.178	-25.822	54

Vertical Polarization for Average Detector:

Modulation	Channel No.	Frequency (MHz)	Peak Measurement (dB μ V/m)	Duty Cycle Factor (dB)	Measurement Level (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)
GFSK	0	2387.6	59.21	-30.752	28.458	-25.542	54
		2402.0	118.45	-30.752	87.698	--	--
	39	7323.0	56.16	-30.752	25.408	-28.592	54
	78	2480.2	117.99	-30.752	87.238	--	--
		2483.8	66.85	-30.752	36.098	-17.902	54
8DPSK	0	2388.0	59.48	-30.752	28.728	-25.272	54
		2402.2	117.32	-30.752	86.568	--	--
	78	2480.0	116.96	-30.752	86.208	--	--
		2483.6	64.63	-30.752	33.878	-20.122	54