




802.11b/20MHz/1M/2412MHz/Ch1/Ant.1(Band Edge)

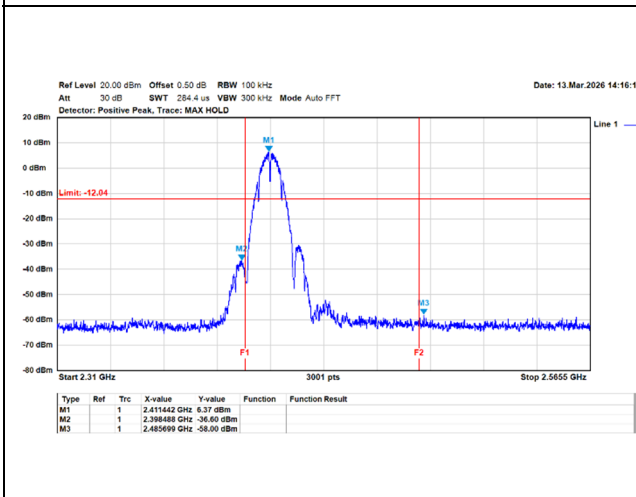


802.11b/20MHz/1M/2462MHz/Ch11/Ant.1(Band Edge)

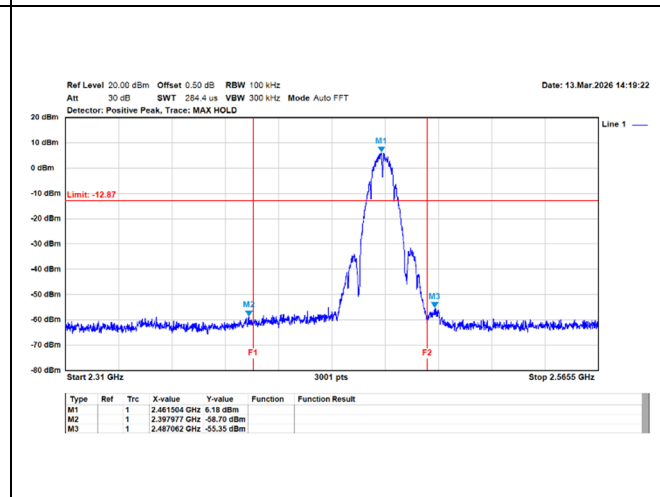


802.11g/20MHz/6M/2412MHz/Ch1/Ant.1(Band Edge)

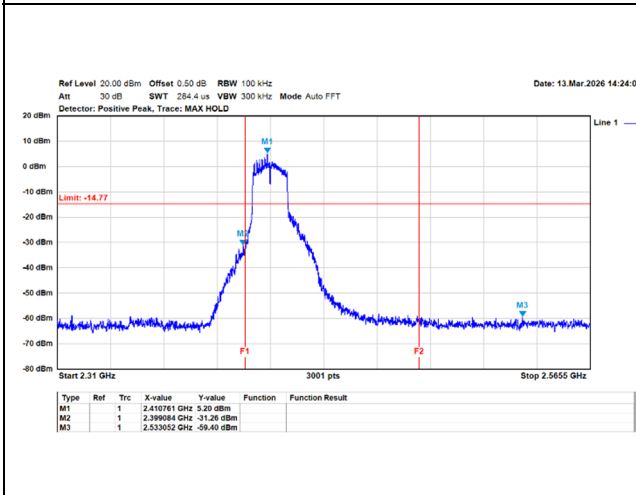


802.11g/20MHz/6M/2462MHz/Ch11/Ant.1(Band Edge)

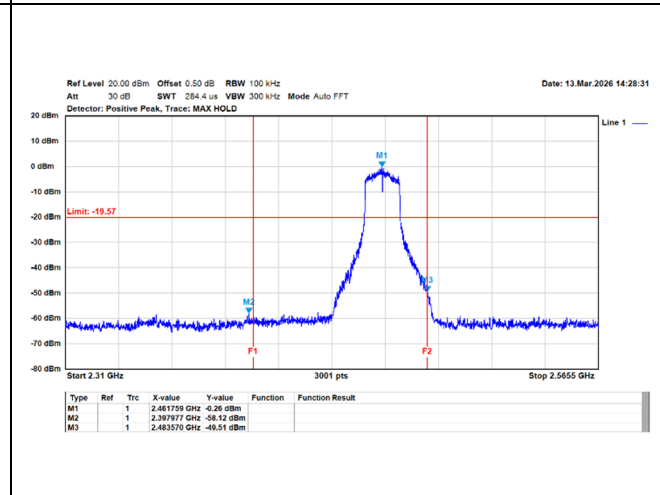


802.11ac/20MHz/MCS0/2412MHz/Ch1/Ant.1(Band Edge)

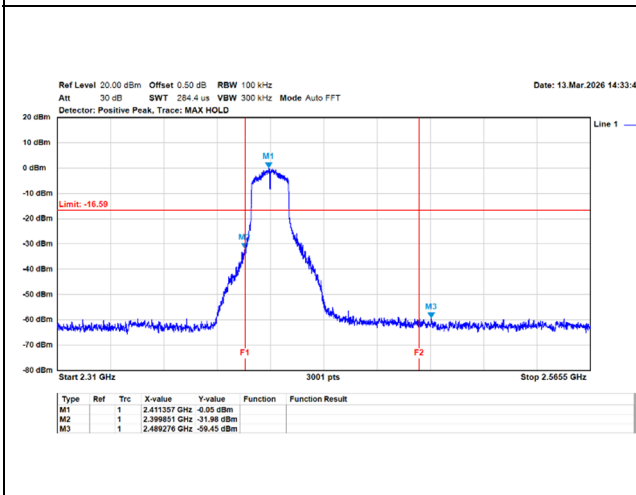


802.11ac/20MHz/MCS0/2462MHz/Ch11/Ant.1(Band Edge)

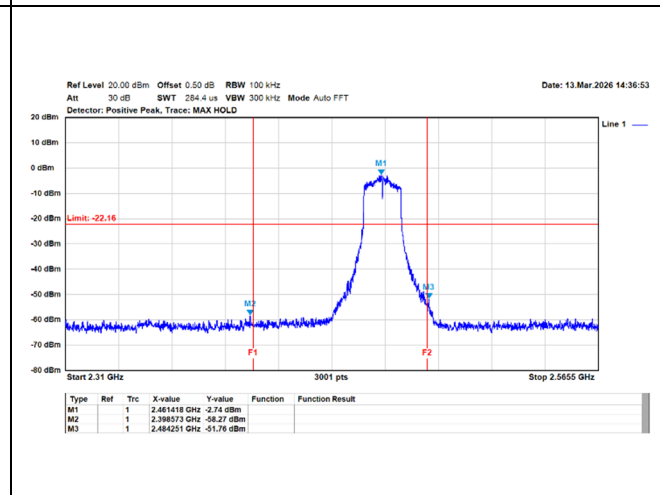


802.11ac/40MHz/MCS0/2422MHz/Ch3/Ant.1(Band Edge)

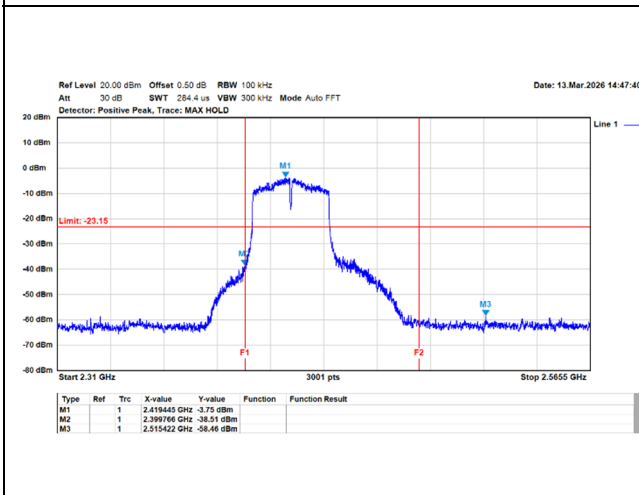


802.11ac/40MHz/MCS0/2452MHz/Ch9/Ant.1(Band Edge)

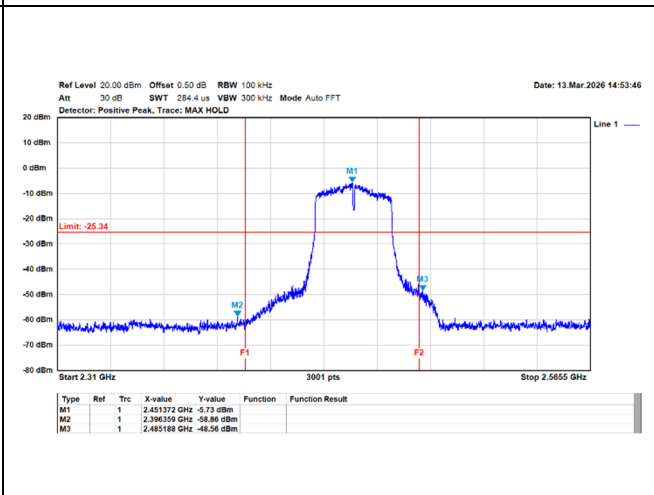


802.11ax/20MHz/MCS0/2412MHz/Ch1/Ant.1(Band Edge)

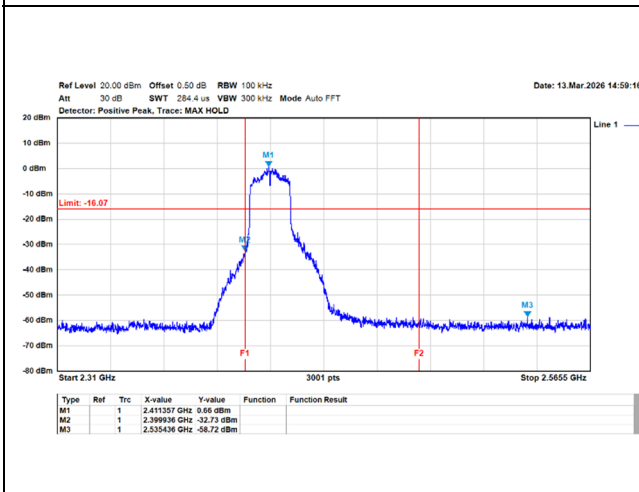


802.11ax/20MHz/MCS0/2462MHz/Ch11/Ant.1(Band Edge)

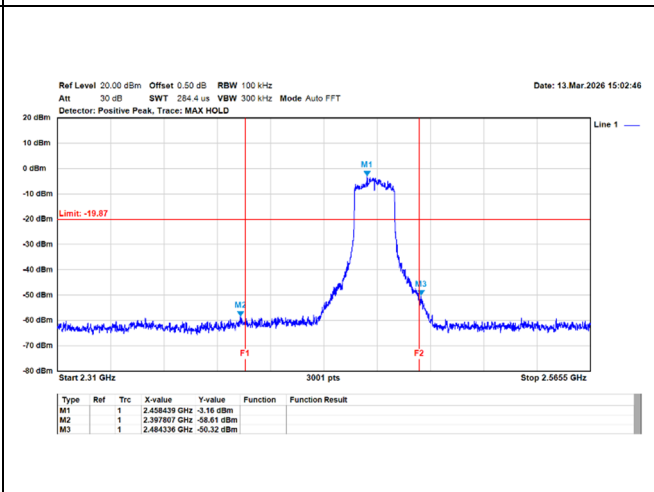


802.11ax/40MHz/MCS0/2422MHz/Ch3/Ant.1(Band Edge)

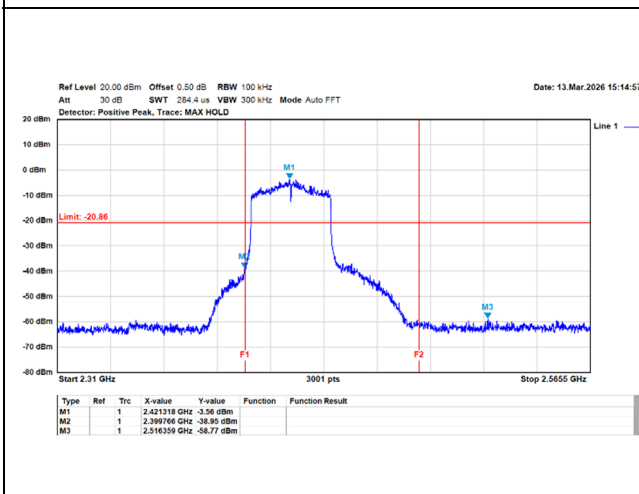


802.11ax/40MHz/MCS0/2452MHz/Ch9/Ant.1(Band Edge)

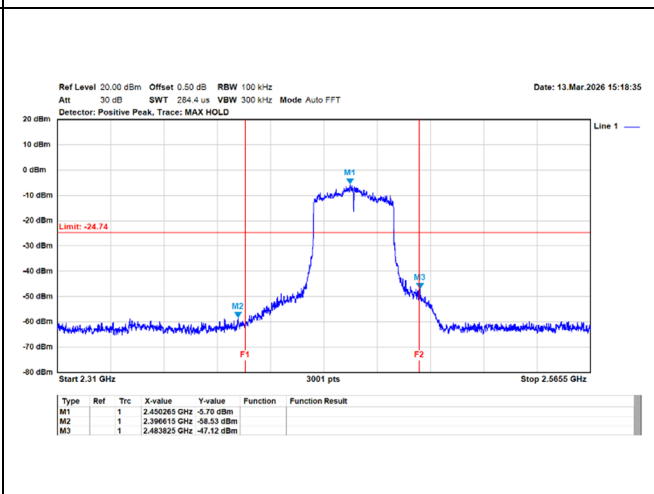


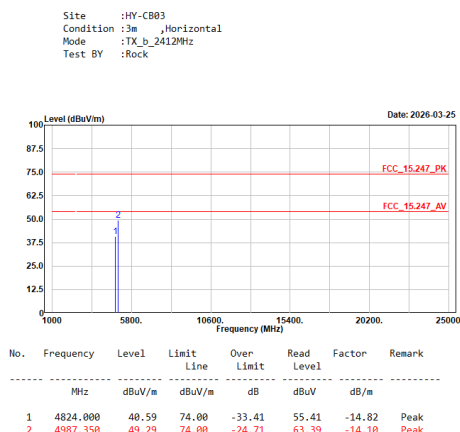Appendix F. Test Result of Radiated Emission**TX_b_2412MHz_H**


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

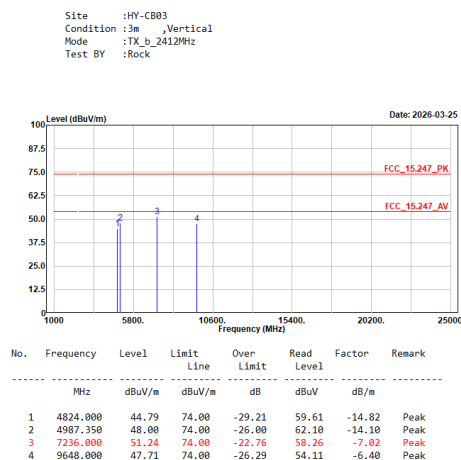TX_b_2412MHz_V

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

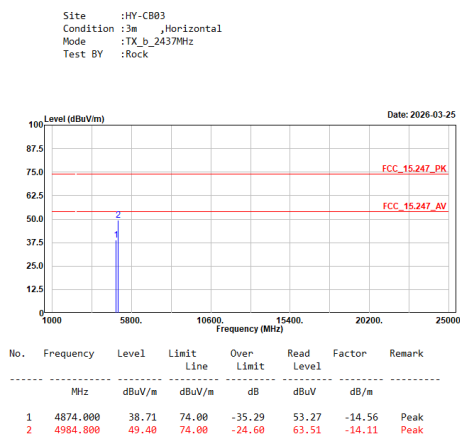TX_b_2437MHz_H


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

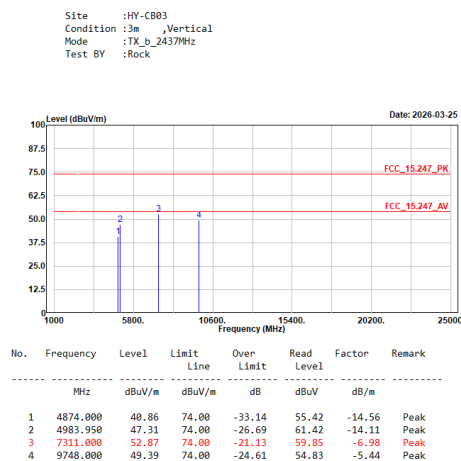TX_b_2437MHz_V

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2462MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_b_2462MHz
Test BY :Rock

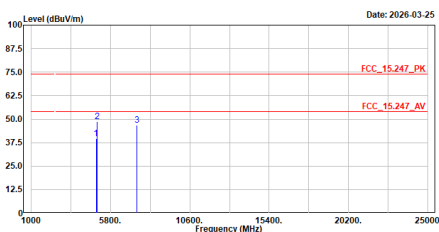


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4924.000	39.45	74.00	-34.55	53.75	-14.30	Peak
2	4983.950	48.71	74.00	-25.29	62.82	-14.11	Peak
3	7386.000	46.86	74.00	-27.14	53.76	-6.90	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2462MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_b_2462MHz
Test BY :Rock

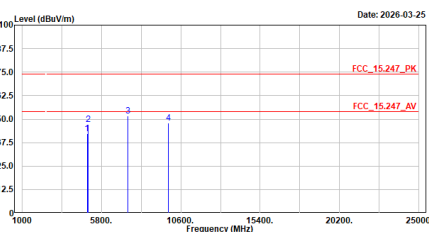


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4924.000	42.30	74.00	-31.70	56.60	-14.30	Peak
2	4989.900	47.10	74.00	-26.90	61.20	-14.10	Peak
3	7386.000	51.71	74.00	-22.29	58.61	-6.90	Peak
4	9848.000	47.89	74.00	-26.11	53.36	-5.47	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2412MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_g_2412MHz
Test BY :Rock

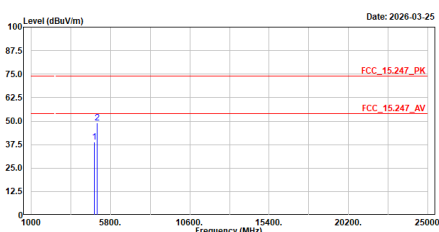


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4824.000	39.04	74.00	-34.96	53.86	-14.82	Peak
2	4986.500	48.98	74.00	-25.02	63.08	-14.10	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2412MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_g_2412MHz
Test BY :Rock

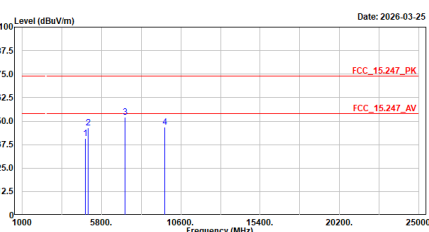


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4824.000	40.63	74.00	-33.37	55.45	-14.82	Peak
2	4990.750	46.44	74.00	-27.56	60.54	-14.10	Peak
3	7236.000	52.06	74.00	-21.94	59.08	-7.02	Peak
4	9648.000	46.71	74.00	-27.29	53.11	-6.40	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2437MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_g_2437MHz
Test BY :Rock

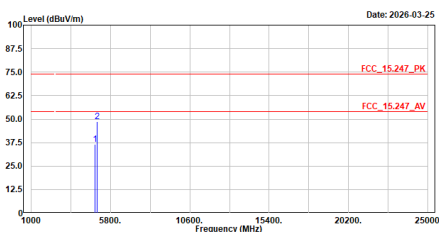


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4874.000	36.75	74.00	-37.25	51.31	-14.56	Peak
2	4976.300	48.64	74.00	-25.36	62.76	-14.12	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2437MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_g_2437MHz
Test BY :Rock

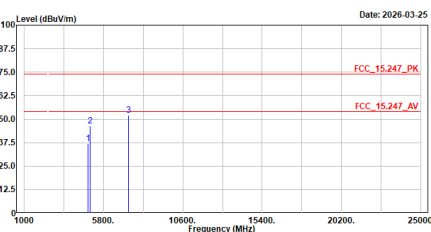


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4874.000	37.10	74.00	-36.90	51.66	-14.56	Peak
2	4989.050	46.44	74.00	-27.56	60.54	-14.10	Peak
3	7311.000	52.21	74.00	-21.79	59.19	-6.98	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2462MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_g_2462MHz
Test BY :Rock

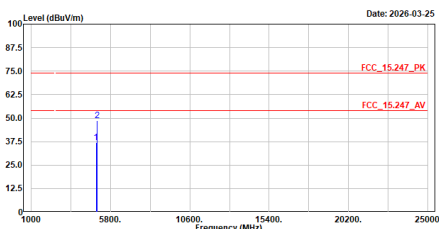


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4924.000	37.14	74.00	-36.86	51.44	-14.30	Peak
2	4976.300	48.64	74.00	-25.36	62.76	-14.12	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2462MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_g_2462MHz
Test BY :Rock

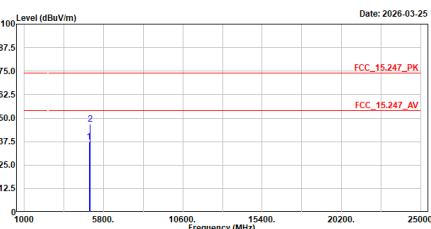


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4924.000	37.39	74.00	-36.61	51.69	-14.30	Peak
2	4993.300	46.84	74.00	-27.16	60.93	-14.09	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_2412MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac20_2412MHz
Test BY :Rock

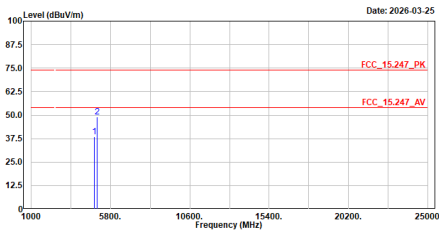


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4824.000	38.58	74.00	-35.42	53.40	-14.82	Peak
2	4995.000	49.18	74.00	-24.82	63.27	-14.09	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_2412MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac20_2412MHz
Test BY :Rock

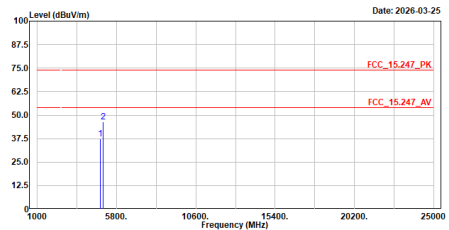


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4824.000	37.51	74.00	-36.49	52.33	-14.82	Peak
2	4984.800	46.49	74.00	-27.51	60.60	-14.11	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_2437MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac20_2437MHz
Test BY :Rock

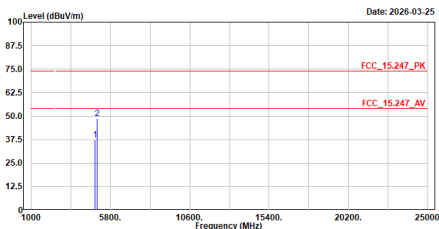


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4874.000	37.37	74.00	-36.63	51.93	-14.56	Peak
2	4991.600	48.70	74.00	-25.30	62.80	-14.10	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_2437MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac20_2437MHz
Test BY :Rock

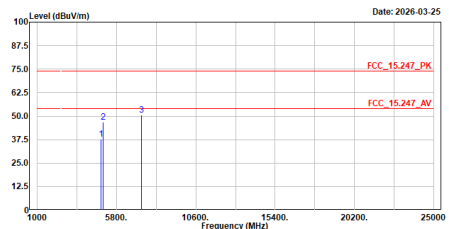


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4874.000	37.85	74.00	-36.15	52.41	-14.56	Peak
2	4986.500	46.78	74.00	-27.22	60.88	-14.10	Peak
3	7311.000	50.49	74.00	-23.51	57.47	-6.98	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_2462MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac20_2462MHz
Test BY :Rock

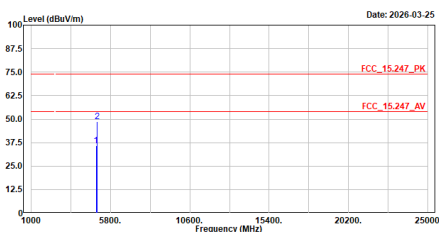


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4924.000	36.02	74.00	-37.98	50.32	-14.30	Peak
2	4989.900	48.58	74.00	-25.42	62.68	-14.10	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_2462MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac20_2462MHz
Test BY :Rock

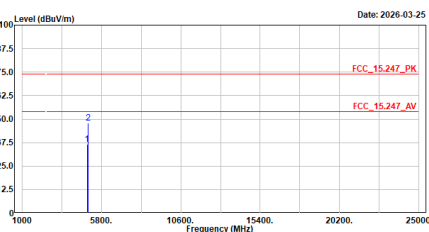


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4924.000	36.68	74.00	-37.32	50.98	-14.30	Peak
2	5000.100	48.09	74.00	-25.91	62.16	-14.07	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_2422MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac40_2422MHz
Test BY :Rock

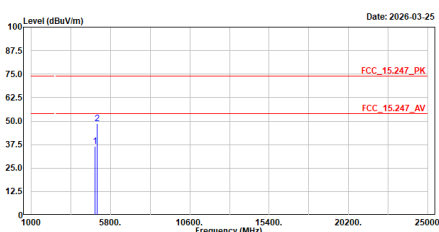


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4844.000	36.51	74.00	-37.49	51.22	-14.71	Peak
2	4985.650	48.58	74.00	-25.42	62.69	-14.11	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_2422MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac40_2422MHz
Test BY :Rock

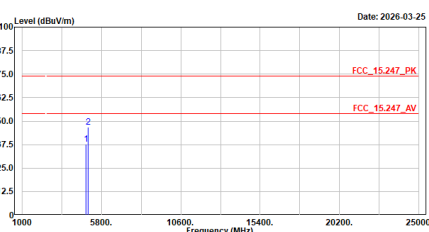


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4844.000	37.75	74.00	-36.25	52.46	-14.71	Peak
2	4987.350	46.80	74.00	-27.20	60.90	-14.10	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_2437MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac40_2437MHz
Test BY :Rock

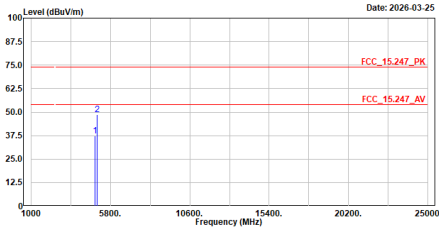


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4874.000	37.17	74.00	-36.83	51.73	-14.56	Peak
2	4986.500	48.67	74.00	-25.33	62.77	-14.10	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_2437MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac40_2437MHz
Test BY :Rock

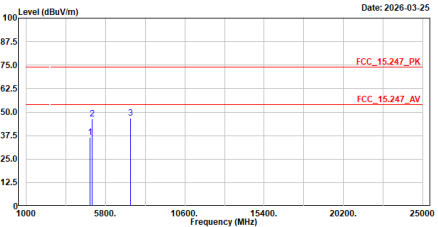


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4874.000	36.79	74.00	-37.21	51.35	-14.56	Peak
2	4984.800	46.54	74.00	-27.46	60.65	-14.11	Peak
3	7311.000	46.73	74.00	-27.27	53.71	-6.98	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_2452MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac40_2452MHz
Test BY :Rock

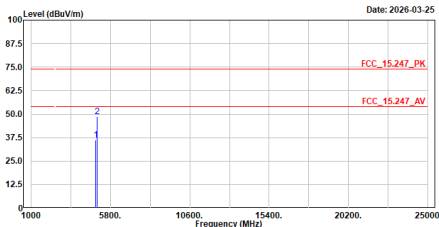


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4904.000	36.20	74.00	-37.80	50.61	-14.41	Peak
2	4983.950	48.78	74.00	-25.22	62.89	-14.11	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_2452MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac40_2452MHz
Test BY :Rock

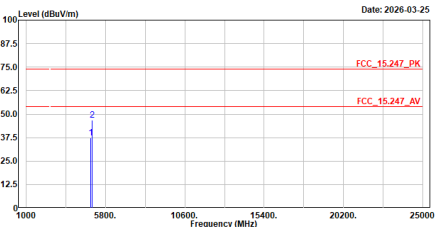


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4904.000	37.31	74.00	-36.69	51.72	-14.41	Peak
2	4997.950	46.65	74.00	-27.35	60.73	-14.08	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2412MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_2412MHz
Test BY :Rock

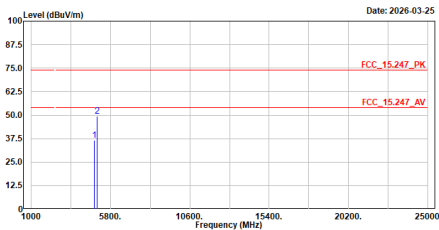


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4824.000	36.76	74.00	-37.24	51.58	-14.82	Peak
2	4994.800	49.43	74.00	-24.57	63.54	-14.11	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2412MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_2412MHz
Test BY :Rock

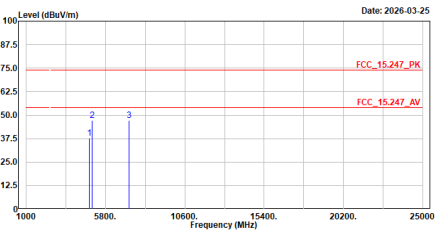


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4824.000	37.89	74.00	-36.11	52.71	-14.82	Peak
2	4990.750	47.19	74.00	-26.81	61.29	-14.10	Peak
3	7236.000	47.17	74.00	-26.83	54.19	-7.02	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2437MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_2437MHz
Test BY :Rock

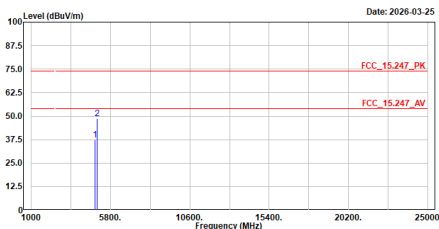


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4874.000	37.23	74.00	-36.77	51.79	-14.56	Peak
2	4990.750	48.73	74.00	-25.27	62.83	-14.10	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2437MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_2437MHz
Test BY :Rock

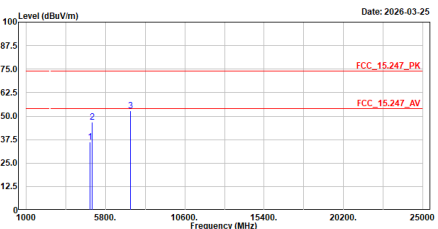


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4874.000	36.41	74.00	-37.59	50.97	-14.56	Peak
2	4994.150	46.80	74.00	-27.20	60.89	-14.09	Peak
3	7311.000	52.69	74.00	-21.31	59.67	-6.98	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2462MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_2462MHz
Test BY :Rock

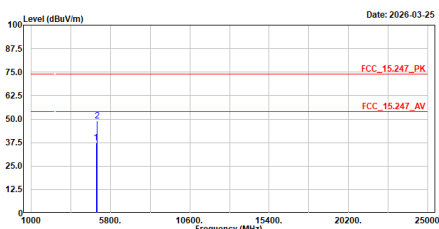


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4924.000	37.44	74.00	-36.56	51.74	-14.30	Peak
2	4984.800	49.87	74.00	-24.93	63.18	-14.11	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2462MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_2462MHz
Test BY :Rock

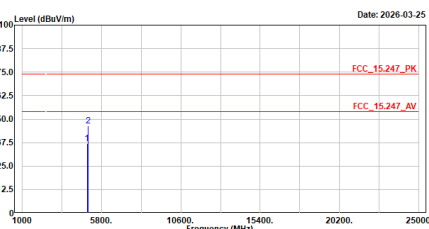


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4924.000	36.99	74.00	-37.01	51.29	-14.30	Peak
2	4993.300	46.49	74.00	-27.51	60.58	-14.09	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_2422MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax40_2422MHz
Test BY :Rock

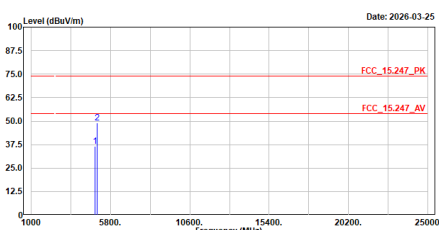


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4844.000	36.49	74.00	-37.51	51.20	-14.71	Peak
2	4987.350	48.99	74.00	-25.01	63.09	-14.10	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_2422MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax40_2422MHz
Test BY :Rock

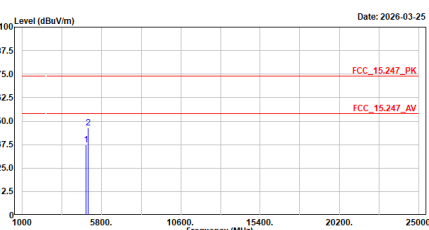


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4844.000	37.45	74.00	-36.55	52.16	-14.71	Peak
2	4992.450	46.51	74.00	-27.49	60.60	-14.09	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_2437MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax40_2437MHz
Test BY :Rock

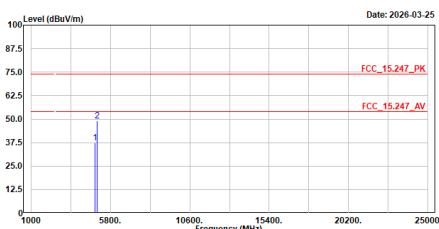


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4874.000	37.49	74.00	-36.51	52.05	-14.56	Peak
2	4995.000	49.06	74.00	-24.94	63.15	-14.09	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_2437MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax40_2437MHz
Test BY :Rock

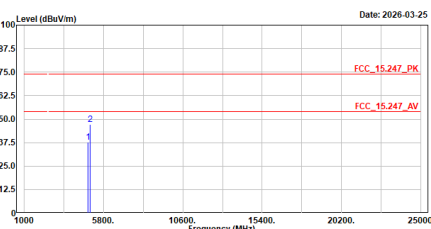


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4874.000	37.60	74.00	-36.40	52.16	-14.56	Peak
2	4999.250	47.26	74.00	-26.74	61.33	-14.07	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_2452MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax40_2452MHz
Test BY :Rock

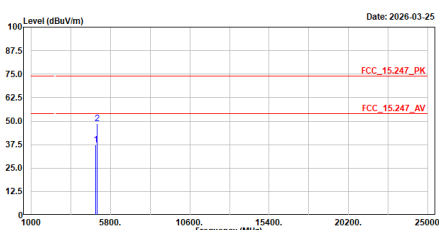


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4904.000	37.21	74.00	-36.79	51.62	-14.41	Peak
2	4983.100	48.85	74.00	-25.15	62.96	-14.11	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_2452MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax40_2452MHz
Test BY :Rock

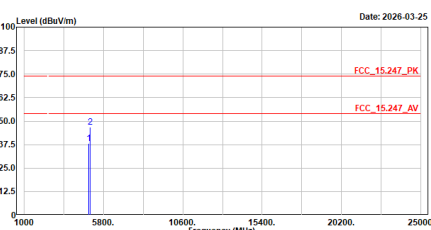


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4904.000	37.97	74.00	-36.03	52.38	-14.41	Peak
2	4992.450	46.73	74.00	-27.27	60.82	-14.09	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_2437MHz_H_QP

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax40_2437MHz
Test BY :Ashton

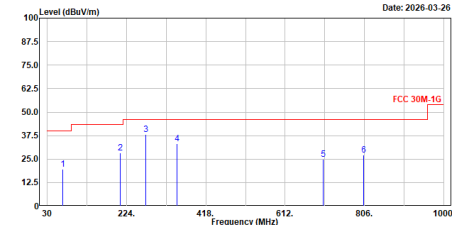


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	68.171	19.53	40.00	-20.47	45.39	-25.86	QP
2	208.440	28.37	43.50	-15.13	54.93	-26.56	QP
3	271.251	38.18	46.00	-7.82	62.19	-24.01	QP
4	347.788	33.12	46.00	-12.68	55.28	-21.96	QP
5	705.445	24.72	46.00	-21.28	38.80	-14.08	QP
6	804.099	27.13	46.00	-18.87	39.63	-12.50	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_ax40_2437MHz_V_QP

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax40_2437MHz
Test BY :Ashton

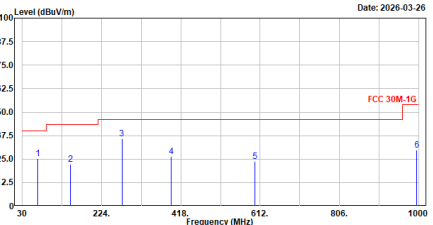


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	67.250	25.30	40.00	-14.70	51.09	-25.79	QP
2	148.491	22.18	43.50	-21.32	46.13	-23.95	QP
3	273.676	35.69	46.00	-10.31	59.61	-23.92	QP
4	394.787	26.36	46.00	-19.64	46.88	-20.52	QP
5	599.904	23.68	46.00	-22.32	39.43	-15.75	QP
6	994.762	29.74	54.00	-24.26	40.23	-10.49	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_b_2412MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_b_2412MHz
Test BY :Ashton

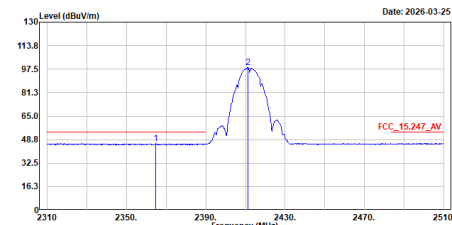


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2364.800	45.97	54.00	-8.03	15.59	30.38	Average
2	2411.200	98.66	-----	-----	68.17	30.49	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2412MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_b_2412MHz
Test BY :Ashton

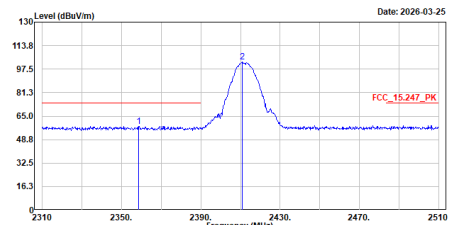


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2358.600	58.08	74.00	-15.92	27.70	30.38	Peak
2	2410.800	102.32	-----	-----	71.83	30.49	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2412MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_b_2412MHz
Test BY :Ashton

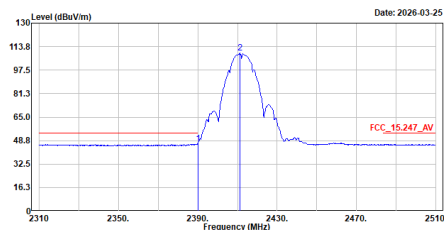


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2390.000	46.68	54.00	-7.32	16.29	30.39	Average
2	2411.200	109.24	-----	-----	78.75	30.49	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2412MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_b_2412MHz
Test BY :Ashton

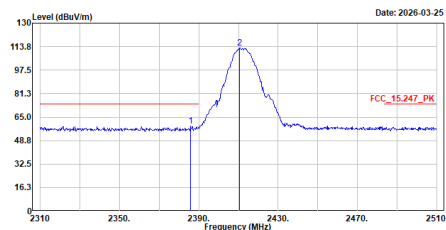


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2386.000	58.75	74.00	-15.25	28.36	30.39	Peak
2	2410.600	112.82	-----	-----	82.33	30.49	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2462MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_b_2462MHz
Test BY :Ashton

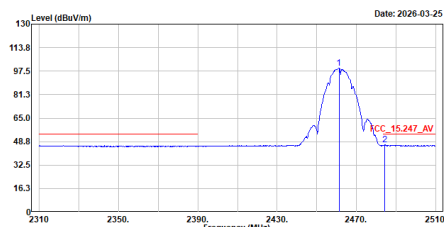


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2461.200	99.61	-----	-----	69.21	30.40	Average
2	2484.400	46.48	54.00	-7.52	16.11	30.37	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2462MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_b_2462MHz
Test BY :Ashton

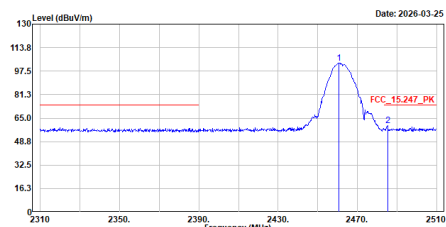


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2460.600	103.09	-----	-----	72.69	30.40	Peak
2	2485.200	59.72	74.00	-14.28	29.34	30.38	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2462MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_b_2462MHz
Test BY :Ashton

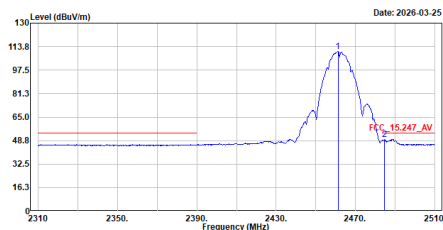


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2461.200	110.37	-----	-----	79.97	30.40	Average
2	2484.600	49.54	54.00	-4.46	19.16	30.38	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2462MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_b_2462MHz
Test BY :Ashton

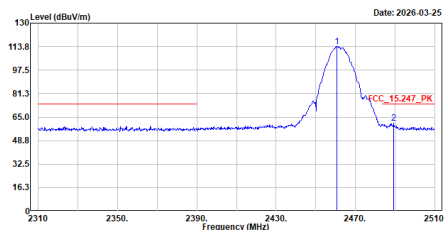


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2460.800	113.79	-----	-----	83.39	30.40	Peak
2	2489.200	60.65	74.00	-13.35	30.22	30.43	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2412MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_g_2412MHz
Test BY :Ashton

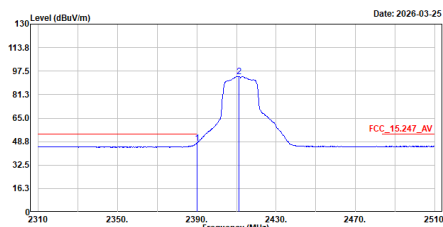


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.000	47.71	54.00	-6.29	17.32	30.39	Average
2	2411.200	93.89	-----	-----	63.40	30.49	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2412MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_g_2412MHz
Test BY :Ashton

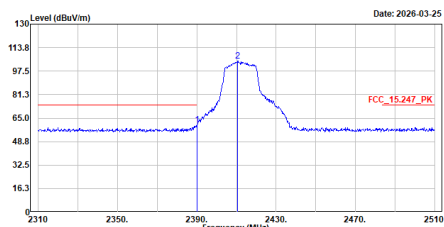


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.000	60.18	74.00	-13.82	29.79	30.39	Peak
2	2410.600	104.54	-----	-----	74.05	30.49	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2412MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_g_2412MHz
Test BY :Ashton

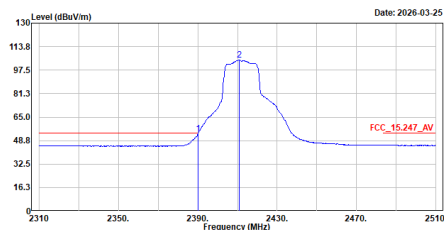


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2390.000	53.40	54.00	-0.60	23.01	30.39	Average
2	2410.800	104.43	-----	-----	73.94	30.49	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2412MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_g_2412MHz
Test BY :Ashton

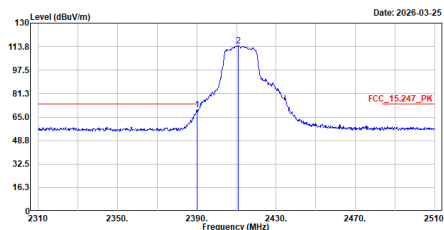


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2390.000	70.03	74.00	-3.97	39.64	30.39	Peak
2	2411.000	114.39	-----	-----	83.90	30.49	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2462MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_g_2462MHz
Test BY :Ashton

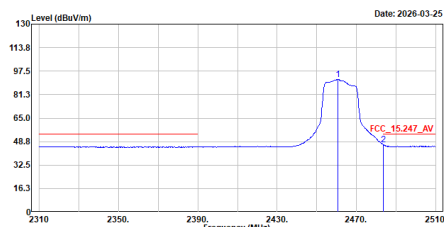


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2460.000	91.80	-----	-----	61.40	30.40	Average
2	2483.600	46.61	54.00	-7.39	16.24	30.37	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2462MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_g_2462MHz
Test BY :Ashton

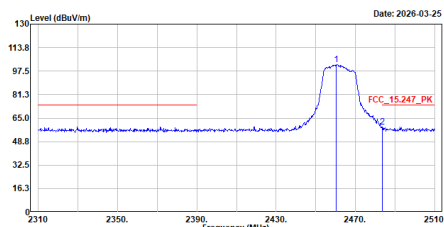


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2460.400	101.80	-----	-----	71.39	30.41	Peak
2	2483.600	59.00	74.00	-15.00	28.63	30.37	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2462MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_g_2462MHz
Test BY :Ashton

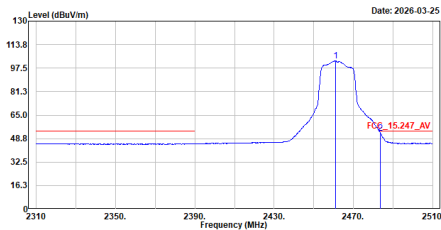


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2461.000	102.46	-----	-----	72.06	30.40	Average
2	2483.600	52.62	54.00	-1.38	22.25	30.37	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2462MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_g_2462MHz
Test BY :Ashton

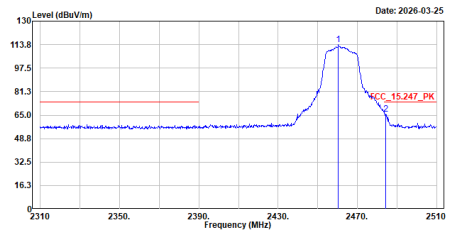


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2460.400	113.91	-----	-----	83.50	30.41	Peak
2	2484.400	65.87	74.00	-8.13	35.50	30.37	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_2412MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac20_2412MHz
Test BY :Ashton

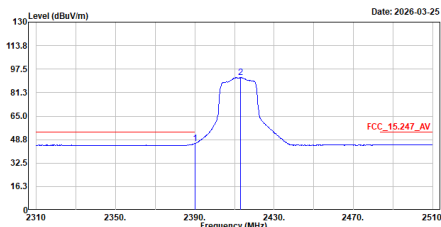


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2390.000	46.03	54.00	-7.97	15.64	30.39	Average
2	2413.200	91.75	-----	-----	61.26	30.49	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_2412MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac20_2412MHz
Test BY :Ashton

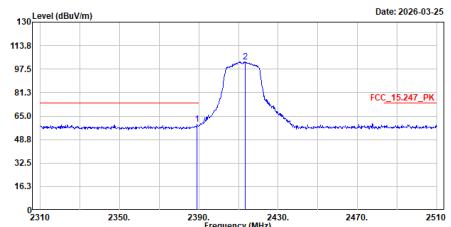


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2389.200	59.57	74.00	-14.43	29.18	30.39	Peak
2	2413.400	102.48	-----	-----	71.99	30.49	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_2412MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac20_2412MHz
Test BY :Ashton

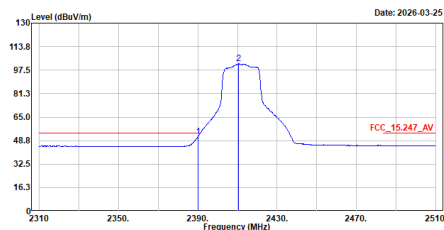


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2390.000	51.43	54.00	-2.57	21.04	30.39	Average
2	2410.600	101.89	-----	-----	71.40	30.49	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_2412MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac20_2412MHz
Test BY :Ashton

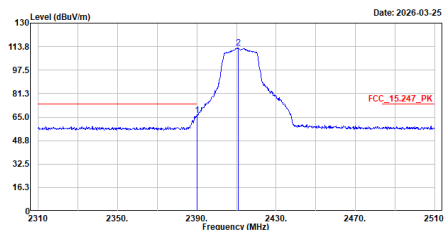


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2390.000	66.09	74.00	-7.91	35.70	30.39	Peak
2	2411.000	112.79	-----	-----	82.30	30.49	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_2462MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac20_2462MHz
Test BY :Ashton

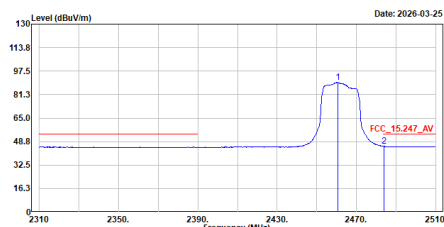


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2460.600	89.78	-----	-----	59.38	30.40	Average
2	2483.800	45.47	54.00	-8.53	15.10	30.37	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_2462MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac20_2462MHz
Test BY :Ashton

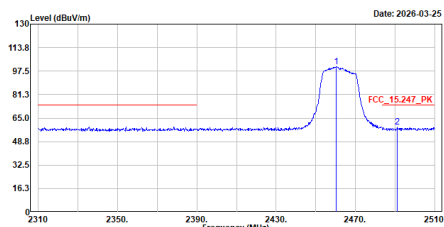


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2460.200	100.47	-----	-----	70.06	30.41	Peak
2	2491.200	59.07	74.00	-14.93	28.63	30.44	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_2462MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac20_2462MHz
Test BY :Ashton

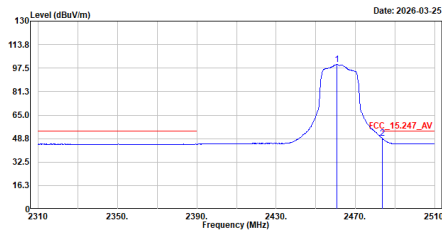


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2460.600	100.04	-----	-----	69.64	30.40	Average
2	2483.600	48.91	54.00	-5.09	18.54	30.37	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_2462MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac20_2462MHz
Test BY :Ashton

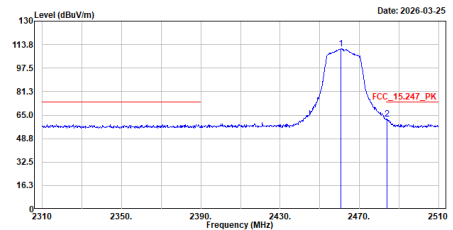


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2460.800	110.89	-----	-----	80.49	30.40	Peak
2	2483.800	62.09	74.00	-11.91	31.72	30.37	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_2422MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac40_2422MHz
Test BY :Ashton

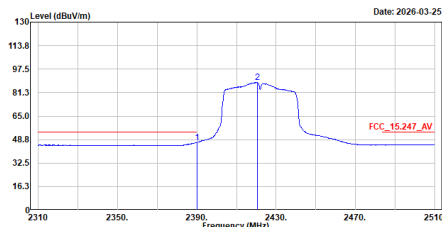


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.000	46.78	54.00	-7.22	16.39	30.39	Average
2	2420.600	88.34	-----	-----	57.86	30.48	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_2422MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac40_2422MHz
Test BY :Ashton

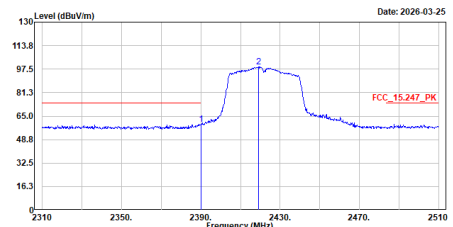


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.000	59.35	74.00	-14.65	28.96	30.39	Peak
2	2419.000	98.97	-----	-----	68.48	30.49	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_2422MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac40_2422MHz
Test BY :Ashton

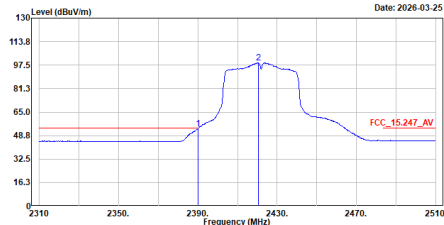


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2390.000	53.37	54.00	-0.63	22.98	30.39	Average
2	2420.600	99.12	-----	-----	68.64	30.48	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_2422MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac40_2422MHz
Test BY :Ashton

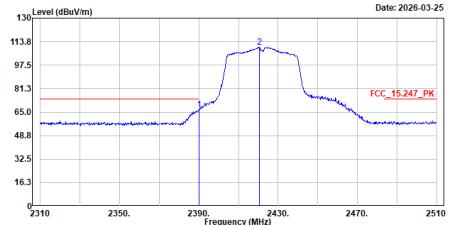


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2390.000	66.94	74.00	-7.06	36.55	30.39	Peak
2	2420.400	109.96	-----	-----	79.47	30.49	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_2452MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac40_2452MHz
Test BY :Ashton

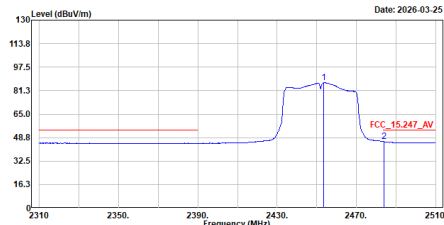


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2453.600	86.82	-----	-----	56.47	30.35	Average
2	2483.800	45.92	54.00	-8.08	15.55	30.37	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_2452MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac40_2452MHz
Test BY :Ashton

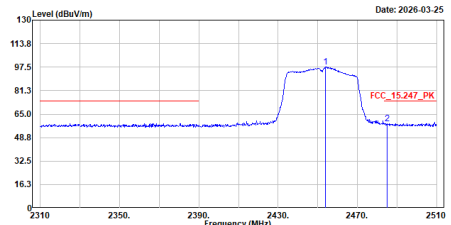


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2454.000	97.60	-----	-----	67.25	30.35	Peak
2	2485.000	58.52	74.00	-15.48	28.14	30.38	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_2452MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac40_2452MHz
Test BY :Ashton

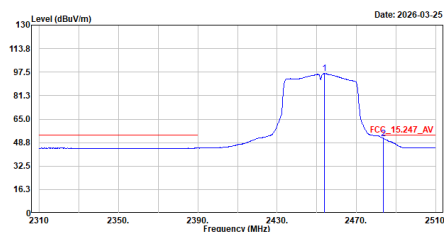


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2453.800	96.48	-----	-----	66.13	30.35	Average
2	2483.600	51.62	54.00	-2.38	21.25	30.37	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_2452MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac40_2452MHz
Test BY :Ashton

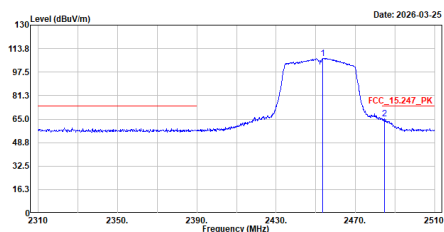


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2453.600	107.16	-----	-----	76.81	30.35	Peak
2	2484.800	65.17	74.00	-8.83	34.79	30.38	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2412MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_2412MHz
Test BY :Ashton

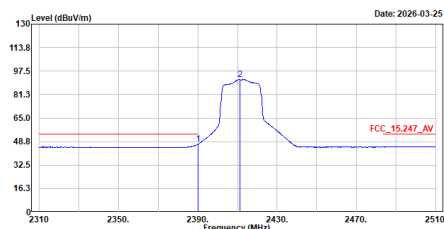


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2390.000	46.93	54.00	-7.07	16.54	30.39	Average
2	2411.200	91.77	-----	-----	61.28	30.49	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2412MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_2412MHz
Test BY :Ashton

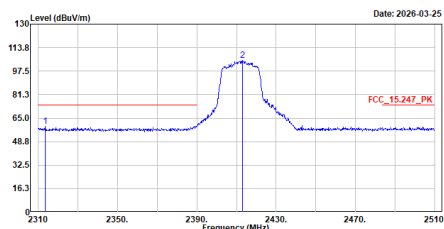


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2313.400	59.23	74.00	-14.77	28.67	30.56	Peak
2	2413.200	105.21	-----	-----	74.72	30.49	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2412MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_2412MHz
Test BY :Ashton

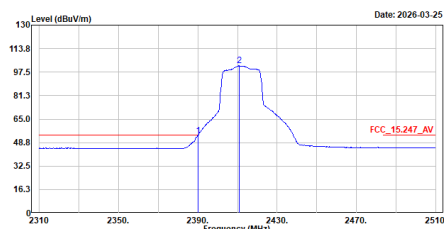


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.000	53.45	54.00	-0.55	23.06	30.39	Average
2	2410.800	101.96	-----	-----	71.47	30.49	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2412MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_2412MHz
Test BY :Ashton

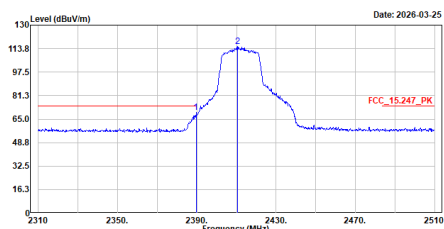


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2389.600	69.68	74.00	-4.32	39.29	30.39	Peak
2	2410.400	115.10	-----	-----	84.61	30.49	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2462MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_2462MHz
Test BY :Ashton

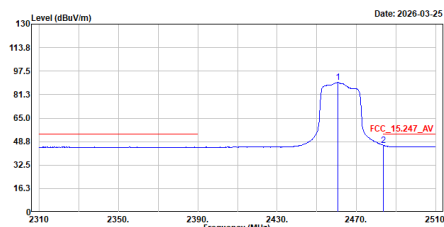


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2460.600	89.62	-----	-----	59.22	30.40	Average
2	2483.600	46.07	54.00	-7.93	15.70	30.37	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2462MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_2462MHz
Test BY :Ashton

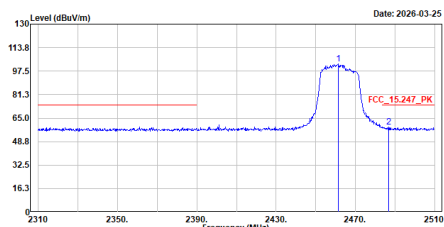


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2461.400	102.31	-----	-----	71.91	30.40	Peak
2	2486.800	59.01	74.00	-14.99	28.61	30.40	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2462MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_2462MHz
Test BY :Ashton

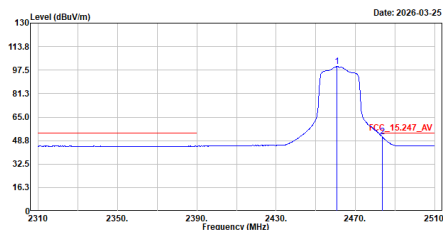


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2460.800	99.97	-----	-----	69.57	30.40	Average
2	2483.600	51.31	54.00	-2.69	20.94	30.37	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2462MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_2462MHz
Test BY :Ashton

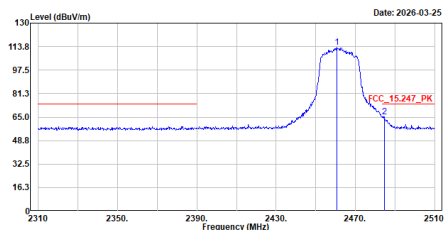


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2460.600	113.23	-----	-----	82.83	30.40	Peak
2	2484.600	65.23	74.00	-8.77	34.85	30.38	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_2422MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax40_2422MHz
Test BY :Ashton

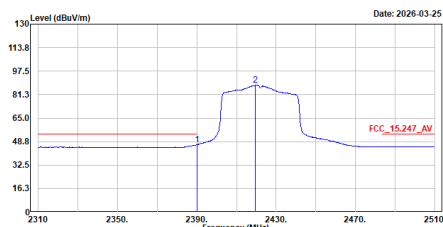


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2390.000	46.61	54.00	-7.39	16.22	30.39	Average
2	2419.400	87.67	-----	-----	57.18	30.49	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_2422MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax40_2422MHz
Test BY :Ashton

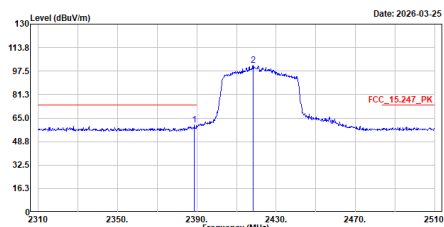


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2388.800	60.15	74.00	-13.85	29.76	30.39	Peak
2	2418.400	101.46	-----	-----	70.97	30.49	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_2422MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax40_2422MHz
Test BY :Ashton

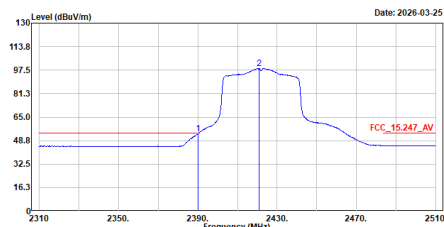


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.000	53.35	54.00	-0.65	22.96	30.39	Average
2	2420.800	98.69	-----	-----	68.21	30.48	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_2422MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax40_2422MHz
Test BY :Ashton

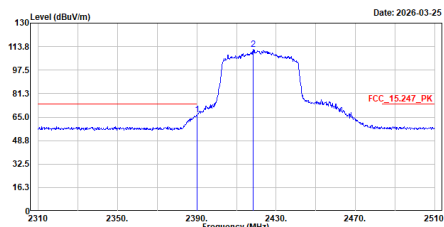


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.000	66.60	74.00	-7.40	36.21	30.39	Peak
2	2418.400	111.96	-----	-----	81.47	30.49	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_2452MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax40_2452MHz
Test BY :Ashton

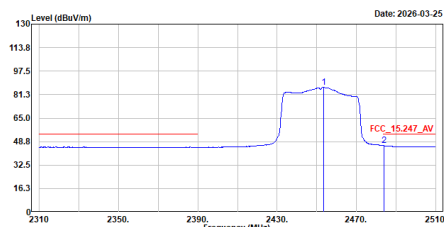


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2453.600	86.34	-----	-----	55.99	30.35	Average
2	2483.800	45.89	54.00	-8.11	15.52	30.37	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_2452MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax40_2452MHz
Test BY :Ashton

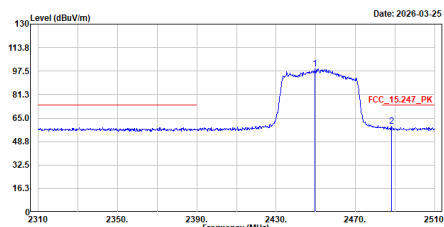


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2449.600	99.25	-----	-----	68.95	30.30	Peak
2	2488.400	59.28	74.00	-14.72	28.86	30.42	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_2452MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax40_2452MHz
Test BY :Ashton

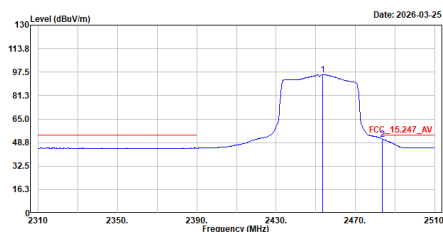


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2453.600	95.88	-----	-----	65.53	30.35	Average
2	2483.600	51.08	54.00	-2.92	20.71	30.37	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_2452MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax40_2452MHz
Test BY :Ashton

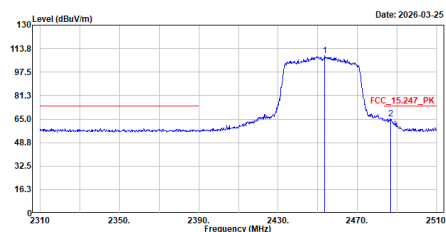

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2453.600	108.68	-----	-----	78.33	30.35	Peak
2	2486.800	65.42	74.00	-8.58	35.02	30.40	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.