

APPENDIX A: TEST PLOTS

FCCID: BCG-A3440	RF EXPOSURE REPORT		Approved by: Technical Manager
DUT Type: Wireless Earbud		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.	Appendix A

ELEMENT

DUT: BCG-A3440; Type: Wireless Earbud; Serial: J5MHTM0003D0001HBM

Communication System: UID:10981 - AAA, CW; MAIA: Y; Frequency: 2404.0 MHz
Medium: 2450 Head; Medium parameters used:
f = 2404.0 MHz; cond = 1.78 S/m; perm = 38.4; density = 1000 kg/m³
Phantom Section: Flat; Space: 0.00 mm

Test Date: 08/07/2026; Ambient Temp: 23.9°C; Tissue Temp: 23.8°C

Probe: EX3DV4 - SN7551; ConvF:(6.86,6.94,7.06); Calibrated: 2026-03-10
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1323; Calibrated: 2026-03-10
Phantom: Twin-SAM V8.0; Serial: 2058
Measurement SW: DASY Module SAR V16.4.0.5005

Mode: 2.4 GHz Bluetooth, Exp: Head| Front Side, Ch. 1, 4 Mbps

Area Scan (60.0 x 60.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (39.2 x 36.4 x 31.2): Measurement grid: dx=2.8 mm, dy=2.8 mm, dz=1.2 mm; Graded Ratio: 1.2


Reference Value = 0.07 W/kg; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.386 W/kg

SAR(1 g) = 0.070 W/kg

Smallest distance from peaks to all points 3 dB below is 3.3 mm

Ratio of SAR at M2 to SAR at M1 = 58.4 %

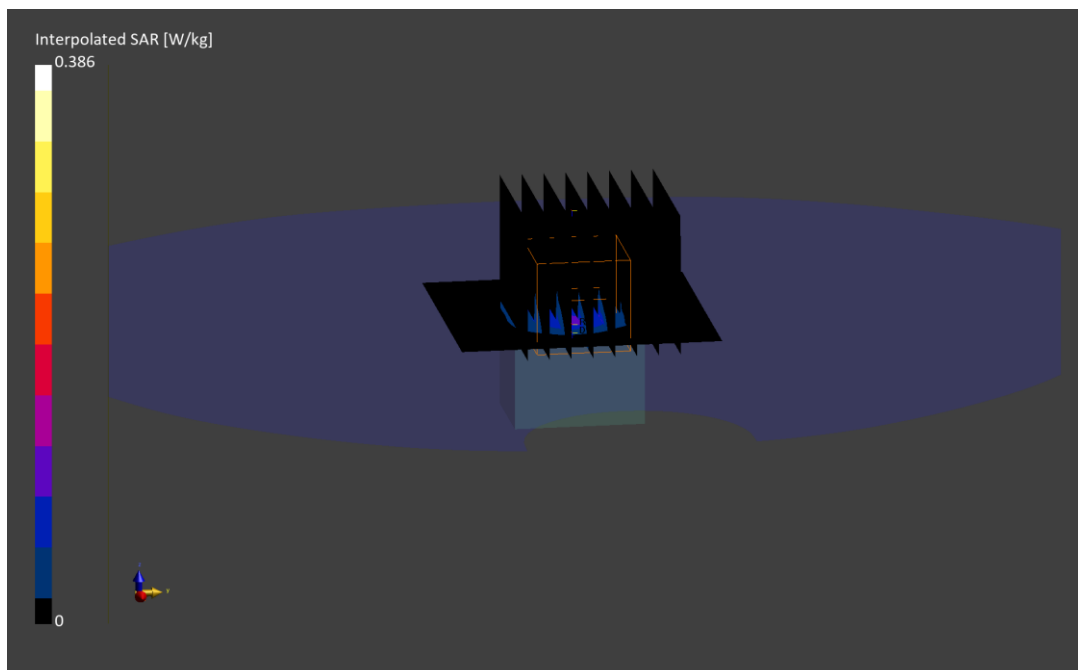

ELEMENT

DUT: BCG-A3440; Type: Wireless Earbud; Serial: J5MHTM0003D0001HBM

Communication System: UID:10670 - AAA, CW; MAIA: Y; Frequency: 5157.0 MHz
Medium: 5200-5800 Head; Medium parameters used:
f = 5157.0 MHz; cond = 4.40 S/m; perm = 35.6; density = 1000 kg/m³
Phantom Section: Flat; Space: 0.00 mm

Test Date: 08/04/2026; Ambient Temp: 21.1°C; Tissue Temp: 19.0°C

Probe: EX3DV4 - SN7490; ConvF:(5.24,5.35,5.52); Calibrated: 2025-12-23
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1644; Calibrated: 2025-12-03
Phantom: Twin-SAM V8.0; Serial: 2070
Measurement SW: DASY Module SAR V16.4.0.5005

Mode: NB U-NII 1, Exp: Head| Front Side, Ch. Low, 1 Mbps

Area Scan (60.0 x 60.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (27.3 x 27.3 x 22.9): Measurement grid: dx=3.9 mm, dy=3.9 mm, dz=1.4 mm; Graded Ratio: 1.4


Reference Value = 0.05 W/kg; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.322 W/kg

SAR(1 g) = 0.055 W/kg

Smallest distance from peaks to all points 3 dB below is 5.3 mm

Ratio of SAR at M2 to SAR at M1 = 48.9 %

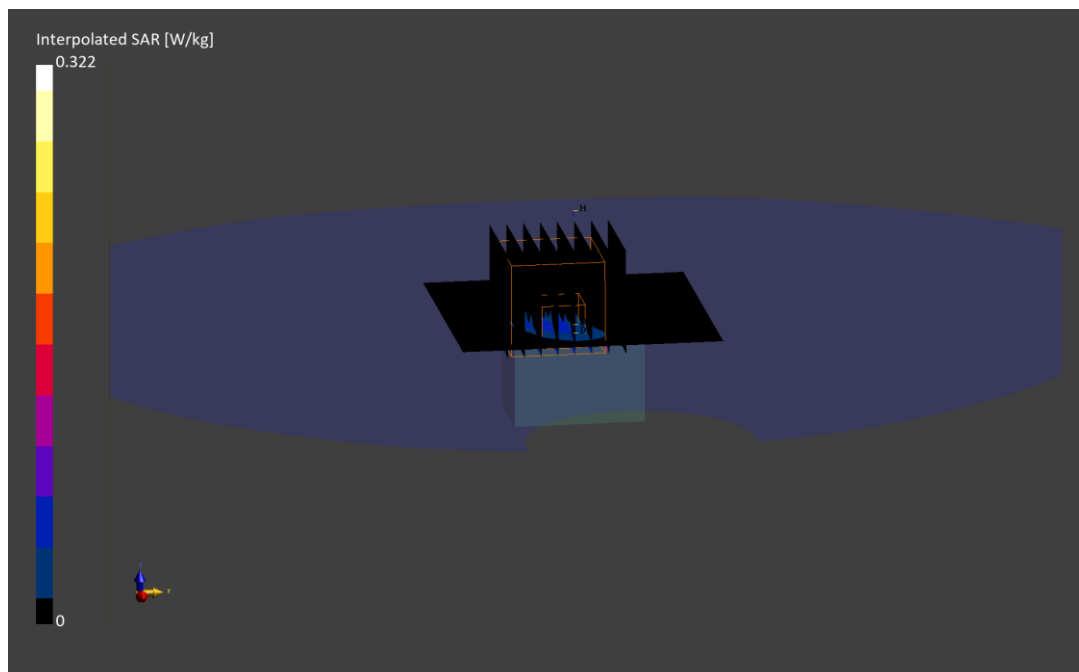

ELEMENT

DUT: BCG-A3440; Type: Wireless Earbud; Serial: J5MHTM0003D0001HBM

Communication System: UID:10670 - AAA, CW; MAIA: Y; Frequency: 5731.0 MHz
Medium: 5200-5800 Head; Medium parameters used:
f = 5731.0 MHz; cond = 5.05 S/m; perm = 34.5; density = 1000 kg/m³
Phantom Section: Flat; Space: 0.00 mm

Test Date: 08/04/2026; Ambient Temp: 21.1°C; Tissue Temp: 19.0°C

Probe: EX3DV4 - SN7490; ConvF:(4.92,5.02,5.19); Calibrated: 2025-12-23
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1644; Calibrated: 2025-12-03
Phantom: Twin-SAM V8.0; Serial: 2070
Measurement SW: DASY Module SAR V16.4.0.5005

Mode: NB U-NII 3, Exp: Head| Front Side, Ch. Low, 1 Mbps

Area Scan (60.0 x 60.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (32.0 x 36.0 x 22.9): Measurement grid: dx=4.0 mm, dy=4.0 mm, dz=1.4 mm; Graded Ratio: 1.4


Reference Value = 0.08 W/kg; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.703 W/kg

SAR(1 g) = 0.109 W/kg

Smallest distance from peaks to all points 3 dB below is 4.8 mm

Ratio of SAR at M2 to SAR at M1 = 43.7 %

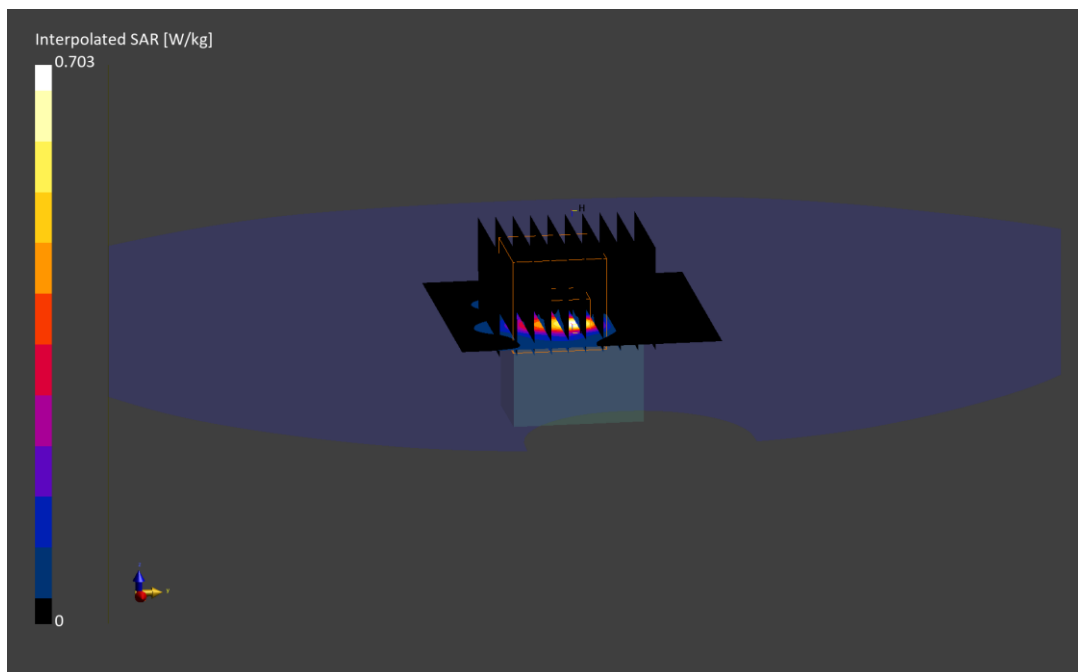

ELEMENT

DUT: BCG-A3440; Type: Wireless Earbud; Serial: J5MHTM0007T0001HBM

Communication System: UID:10982 - AAA, CW; MAIA: Y; Frequency: 6342.0 MHz
Medium: 6000 Head; Medium parameters used:
f = 6342.0 MHz; cond = 5.74 S/m; perm = 35.4; density = 1000 kg/m³
Phantom Section: Flat; Space: 0.00 mm

Test Date: 08/03/2026; Ambient Temp: 21.0°C; Tissue Temp: 19.0°C

Probe: EX3DV4 - SN7416; ConvF:(5.2,5.36,5.29); Calibrated: 2026-05-06
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn701; Calibrated: 2026-05-08
Phantom: Twin-SAM V8.0; Serial: 2071
Measurement SW: DASY Module SAR V16.4.0.5005

Mode: NB U-NII 5, Exp: Head| Front Side, Ch. Mid-High, 8 Mbps

Area Scan (51.0 x 68.0): Measurement grid: dx=8.5 mm, dy=8.5 mm

Zoom Scan (34.0 x 34.0 x 22.9): Measurement grid: dx=3.4 mm, dy=3.4 mm, dz=1.4 mm; Graded Ratio: 1.4


Reference Value = 0.06 W/kg; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.368 W/kg

SAR(1 g) = 0.073 W/kg; APD(4cm²) = 0.417 W/m²

Smallest distance from peaks to all points 3 dB below is 4.1 mm

Ratio of SAR at M2 to SAR at M1 = 48.9 %

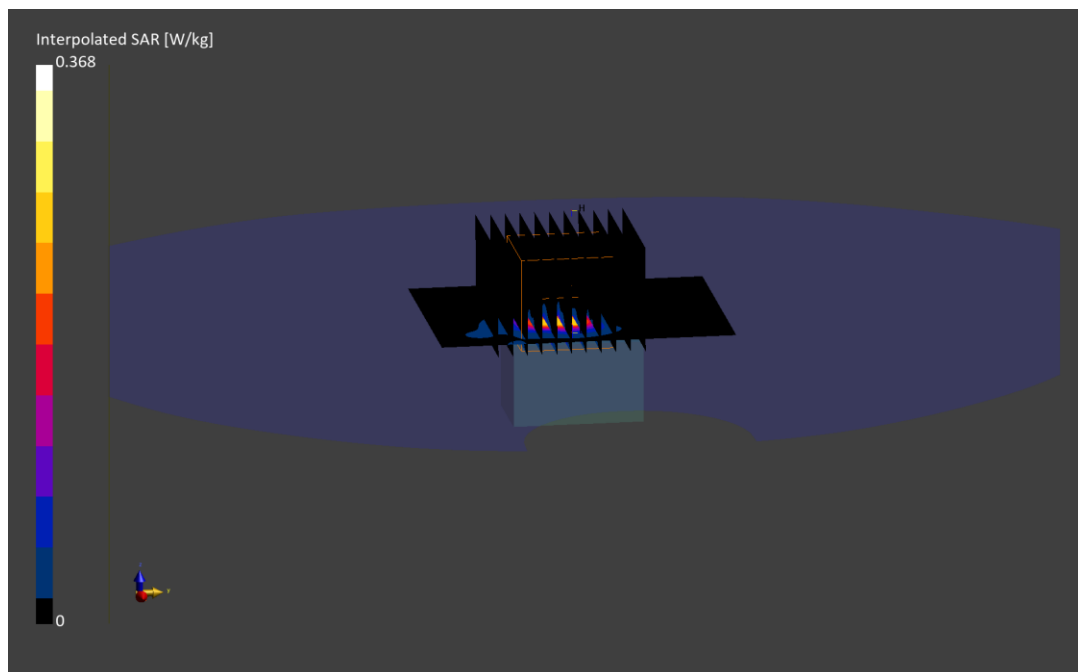

ELEMENT

DUT: BCG-A3440; Type: Wireless Earbud; Serial: J5MHTM0003D0001HBM

Communication System: UID:10981 - AAA, CW; MAIA: Y; Frequency: 2404.0 MHz

Medium: 2450 Head; Medium parameters used:

$f = 2404.0$ MHz; $\text{cond} = 1.78$ S/m; $\text{perm} = 38.4$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Test Date: 08/07/2026; Ambient Temp: 23.9°C; Tissue Temp: 23.8°C

Probe: EX3DV4 - SN7551; ConvF:(6.86,6.94,7.06); Calibrated: 2026-03-10

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1323; Calibrated: 2026-03-10

Phantom: Twin-SAM V8.0; Serial: 2058

Measurement SW: DASY Module SAR V16.4.0.5005

Mode: 2.4 GHz Bluetooth, Exp: Body-worn| Left, Ch. 1, 4 Mbps

Area Scan (60.0 x 60.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm

Zoom Scan (30.0 x 30.0 x 31.2): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.10 W/kg; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.356 W/kg

SAR(1 g) = 0.143 W/kg

Smallest distance from peaks to all points 3 dB below is 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 73.8 %

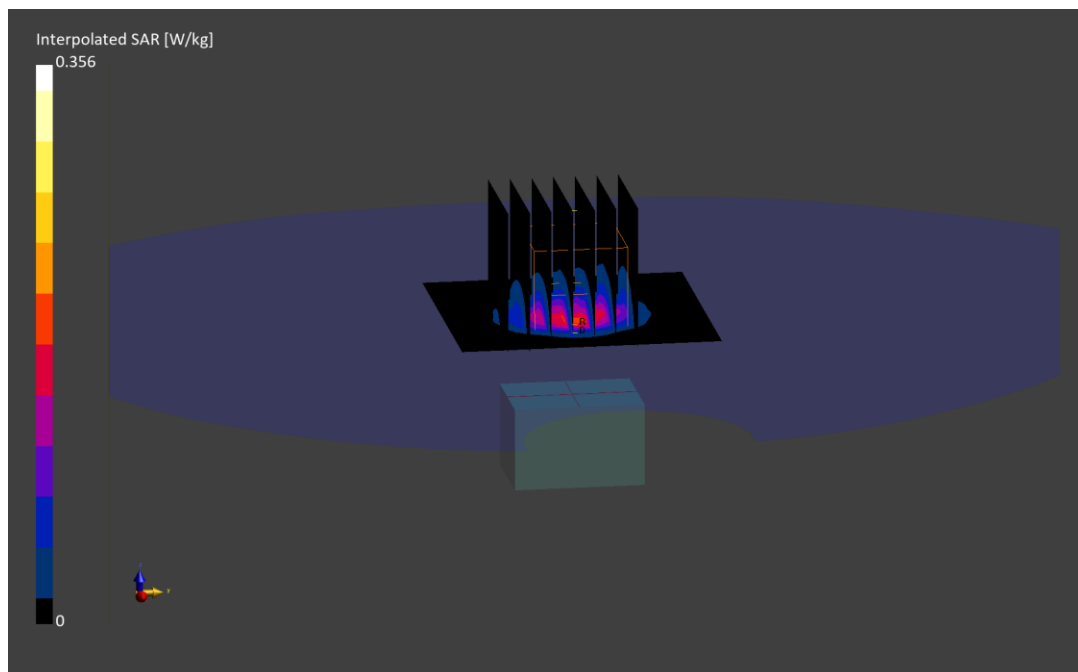

ELEMENT

DUT: BCG-A3440; Type: Wireless Earbud; Serial: J5MHTM0003D0001HBM

Communication System: UID:10670 - AAA, CW; MAIA: Y; Frequency: 5157.0 MHz
Medium: 5200-5800 Head; Medium parameters used:
f = 5157.0 MHz; cond = 4.40 S/m; perm = 35.6; density = 1000 kg/m³
Phantom Section: Flat; Space: 5.00 mm

Test Date: 08/04/2026; Ambient Temp: 21.1°C; Tissue Temp: 19.0°C

Probe: EX3DV4 - SN7490; ConvF:(5.24,5.35,5.52); Calibrated: 2025-12-23
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1644; Calibrated: 2025-12-03
Phantom: Twin-SAM V8.0; Serial: 2070
Measurement SW: DASY Module SAR V16.4.0.5005

Mode: NB U-NII 1, Exp: Body-worn| Back Side, Ch. Low, 1 Mbps

Area Scan (60.0 x 60.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (28.8 x 28.8 x 22.9): Measurement grid: dx=3.6 mm, dy=3.6 mm, dz=1.4 mm; Graded Ratio: 1.4


Reference Value = 0.08 W/kg; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.656 W/kg

SAR(1 g) = 0.124 W/kg

Smallest distance from peaks to all points 3 dB below is 4.6 mm

Ratio of SAR at M2 to SAR at M1 = 57.5 %

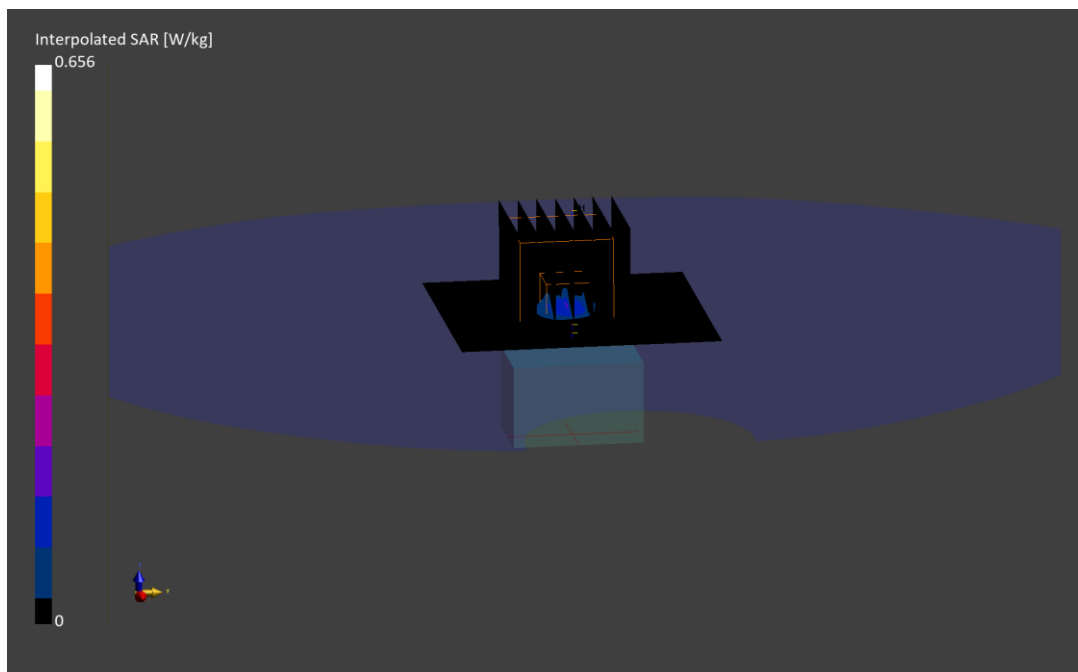

ELEMENT

DUT: BCG-A3440; Type: Wireless Earbud; Serial: J5MHTM0003D0001HBM

Communication System: UID:10670 - AAA, CW; MAIA: Y; Frequency: 5731.0 MHz
Medium: 5200-5800 Head; Medium parameters used:
f = 5731.0 MHz; cond = 5.05 S/m; perm = 34.5; density = 1000 kg/m³
Phantom Section: Flat; Space: 5.00 mm

Test Date: 08/04/2026; Ambient Temp: 21.1°C; Tissue Temp: 19.0°C

Probe: EX3DV4 - SN7490; ConvF:(4.92,5.02,5.19); Calibrated: 2025-12-23
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1644; Calibrated: 2025-12-03
Phantom: Twin-SAM V8.0; Serial: 2070
Measurement SW: DASY Module SAR V16.4.0.5005

Mode: NB U-NII 3, Exp: Body-worn| Back Side, Ch. Low, 1 Mbps

Area Scan (60.0 x 60.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (24.0 x 28.0 x 22.9): Measurement grid: dx=4.0 mm, dy=4.0 mm, dz=1.4 mm; Graded Ratio: 1.4


Reference Value = 0.14 W/kg; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.47 W/kg

SAR(1 g) = 0.262 W/kg

Smallest distance from peaks to all points 3 dB below is 4.7 mm

Ratio of SAR at M2 to SAR at M1 = 54.5 %

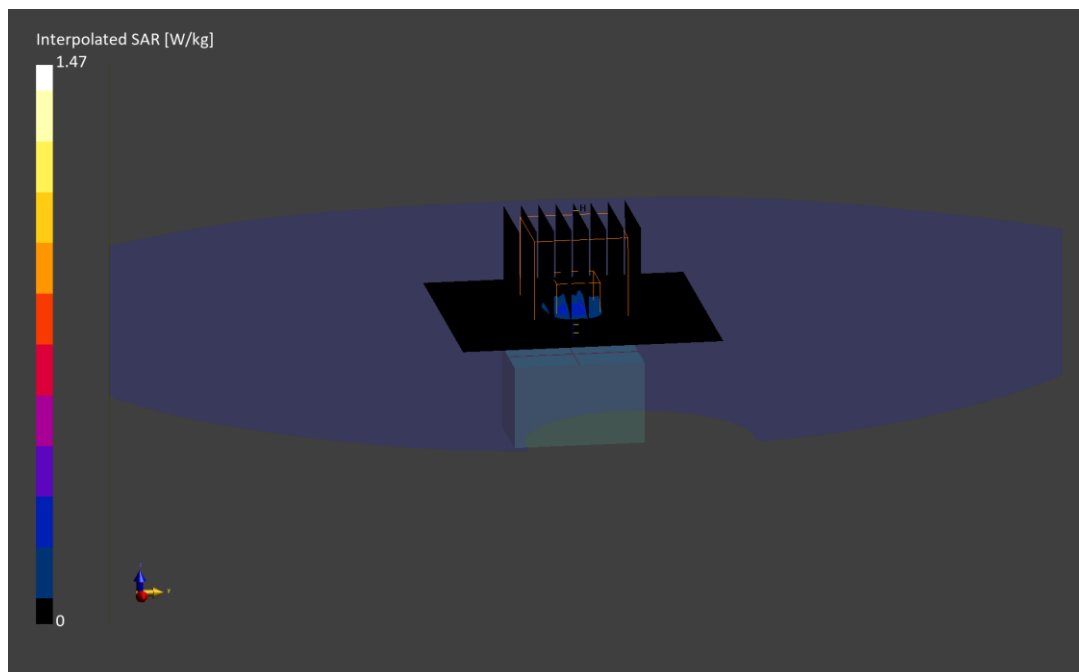

ELEMENT

DUT: BCG-A3440; Type: Wireless Earbud; Serial: J5MHTM0007T0001HBM

Communication System: UID:10982 - AAA, CW; MAIA: Y; Frequency: 6185.0 MHz

Medium: 6000 Head; Medium parameters used:

$f = 6185.0$ MHz; $\text{cond} = 5.49$ S/m; $\text{perm} = 34.0$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 5.00 mm

Test Date: 08/10/2026; Ambient Temp: 21.7°C; Tissue Temp: 20.5°C

Probe: EX3DV4 - SN7420; ConvF:(5.7,5.23,5.9); Calibrated: 2025-10-09

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1408; Calibrated: 2025-10-14

Phantom: Twin-SAM V4.0; Serial: 1275

Measurement SW: DASY Module SAR V16.4.0.5005

Mode: NB U-NII 5, Exp: Body-worn| Back Side, Ch. Low-Mid, 8 Mbps

Area Scan (51.0 x 68.0): Measurement grid: $dx=8.5$ mm, $dy=8.5$ mm

Zoom Scan (23.8 x 27.2 x 22.9): Measurement grid: $dx=3.4$ mm, $dy=3.4$ mm, $dz=1.4$ mm; Graded Ratio: 1.4


Reference Value = 0.09 W/kg; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.462 W/kg

SAR(1 g) = 0.087 W/kg; APD(4cm²) = 0.450 W/m²

Smallest distance from peaks to all points 3 dB below is 5.2 mm

Ratio of SAR at M2 to SAR at M1 = 54.4 %

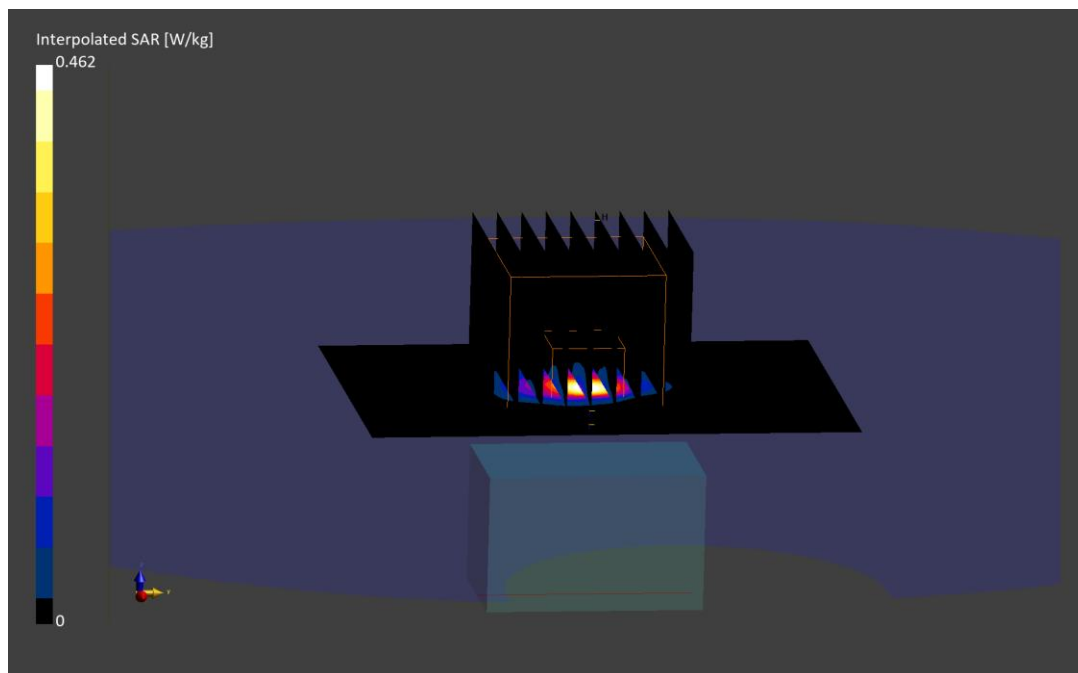

Date: 08/18/2026

Mode: NB U-NII 5, Exp: Head| Front, Ch Mid-High, 8 Mbps

Device Under Test Properties

DUT	Serial Number	DUT Type
BCGA-A3440	J5MHTM0003D0001HBM	Wireless Earbud

Exposure Conditions

Phantom Section	Position	Test Distance [mm]	Channel	Group, UID	Frequency [MHz]
5G	Front	2.00	Mid-High	10982	6342.0

Hardware Setup

Probe, Calibration Date	DAE, Calibration Date
EUmmWV4 - SN9487, 2025-11-18	DAE4 - SN1684, 2025-09-10

Software Setup


Software	Software Version
cDASY6 Module mmWave	3.2.0.1840

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	60.0 x 60.0
Grid Steps [lambda]	0.041 x 0.041
Sensor Surface [mm]	2.0

Measurement Results

Scan Type	5G Scan
Avg. Area [cm²]	4.00
pS _{tot} avg [W/m²]	0.345
pS _n avg [W/m²]	0.272
E _{peak} [V/m]	18.9
Power Drift [dB]	0.14

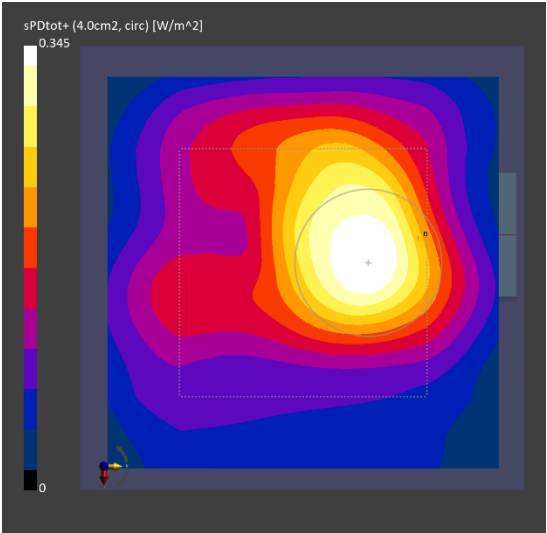

Date: 08/18/2026

Mode: NB U-NII 5, Exp: Body| Back, Ch. Low-Mid, 8 Mbps

Device Under Test Properties

DUT	Serial Number	DUT Type
BCG-A3440	J5MHTM0003D0001HBM	Wireless Earbud

Exposure Conditions

Phantom Section	Position	Test Distance [mm]	Channel	Group, UID	Frequency [MHz]
5G	Back	5.00	Low-Mid	10982	6186.0

Hardware Setup

Probe, Calibration Date	DAE, Calibration Date
EUmmWV4 - SN9487, 2025-11-18	DAE4 - SN1684, 2025-09-10

Software Setup

Software	Software Version
cDASY6 Module mmWave	3.2.0.1840

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	60.0 x 60.0
Grid Steps [lambda]	0.041 x 0.041
Sensor Surface [mm]	5.0

Measurement Results

Scan Type	5G Scan
Avg. Area [cm²]	4.00
pS _{tot} avg [W/m²]	0.278
pS _n avg [W/m²]	0.242
E _{peak} [V/m]	14.8
Power Drift [dB]	0.03

