


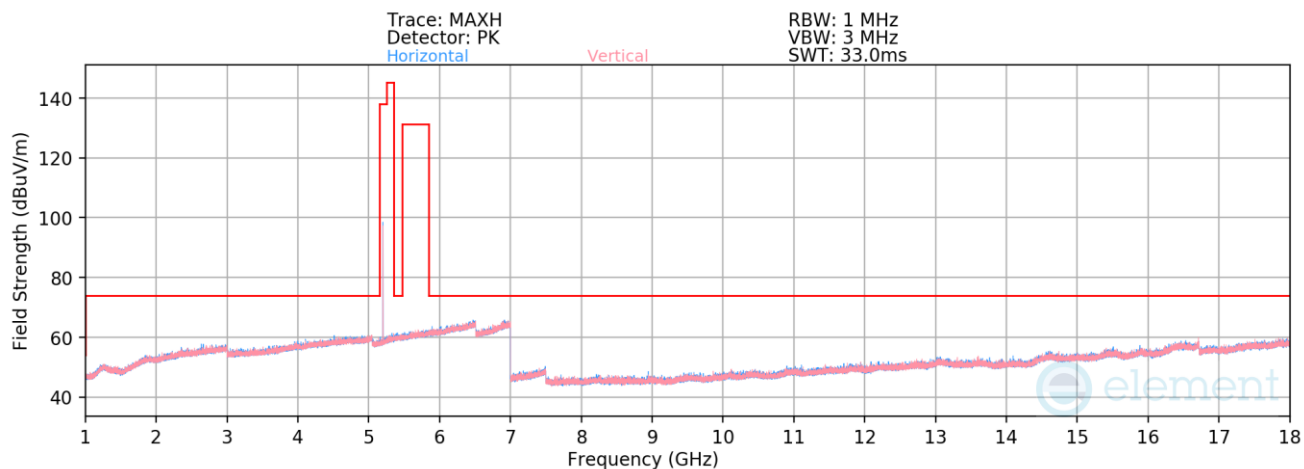

Plot 7-54. Radiated Spurious Emissions 1-18GHz (NB UNII HDRp4 – 5200MHz)

Mode: HDRp4

Data Rate: 4Mbps


Distance of Measurements: 3 Meters

Operating Frequency: 5200MHz

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10400.00	Peak	-	-	-	-69.78	11.65	48.87	68.23	-19.36
* 15600.00	Average	-	-	-	-80.51	16.77	43.26	53.98	-10.72
* 15600.00	Peak	-	-	-	-70.22	16.77	53.55	73.98	-20.43

Table 7-23. Radiated Spurious Emissions Measurements

FCC ID: BCG-A3440	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/11/2026 - 8/12/2026	EUT Type: Wireless Left Earbud	Approved by: Technical Manager
Test Report S/N: 1C2606090047-04-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 66 of 105

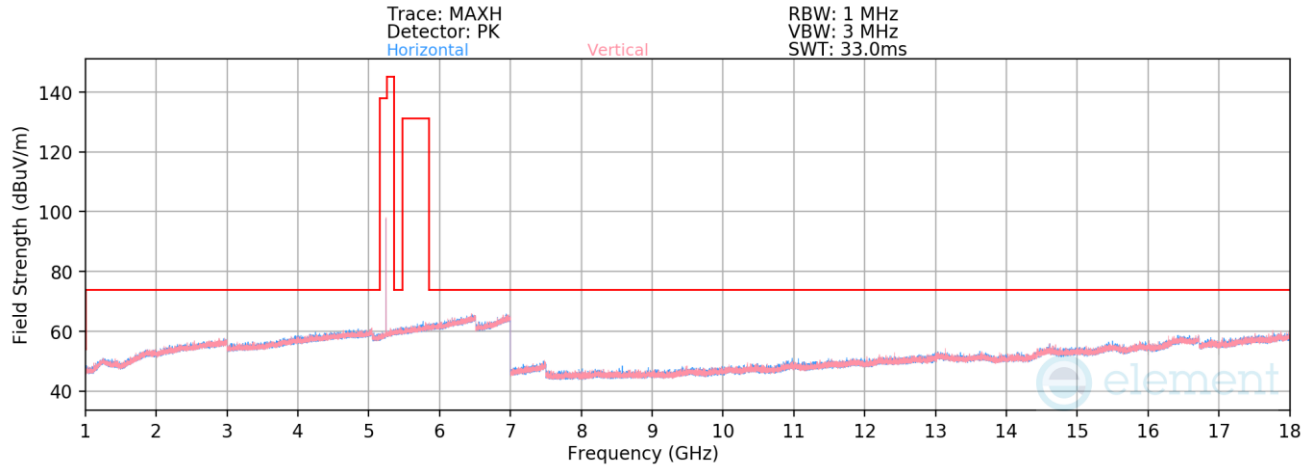


Plot 7-55. Radiated Spurious Emissions 1-18GHz (NB UNII HDRp4 – 5245MHz)

Mode: HDRp4
Data Rate: 4Mbps
Distance of Measurements: 3 Meters
Operating Frequency: 5245MHz

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10490.00	Peak	-	-	-	-69.15	12.01	49.86	68.23	-18.37
* 15735.00	Average	-	-	-	-81.51	17.45	42.94	53.98	-11.04
* 15735.00	Peak	-	-	-	-70.50	17.45	53.95	73.98	-20.03

Table 7-24. Radiated Spurious Emissions Measurements

FCC ID: BCG-A3440	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/11/2026 - 8/12/2026	EUT Type: Wireless Left Earbud	Approved by: Technical Manager
Test Report S/N: 1C2606090047-04-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 67 of 105

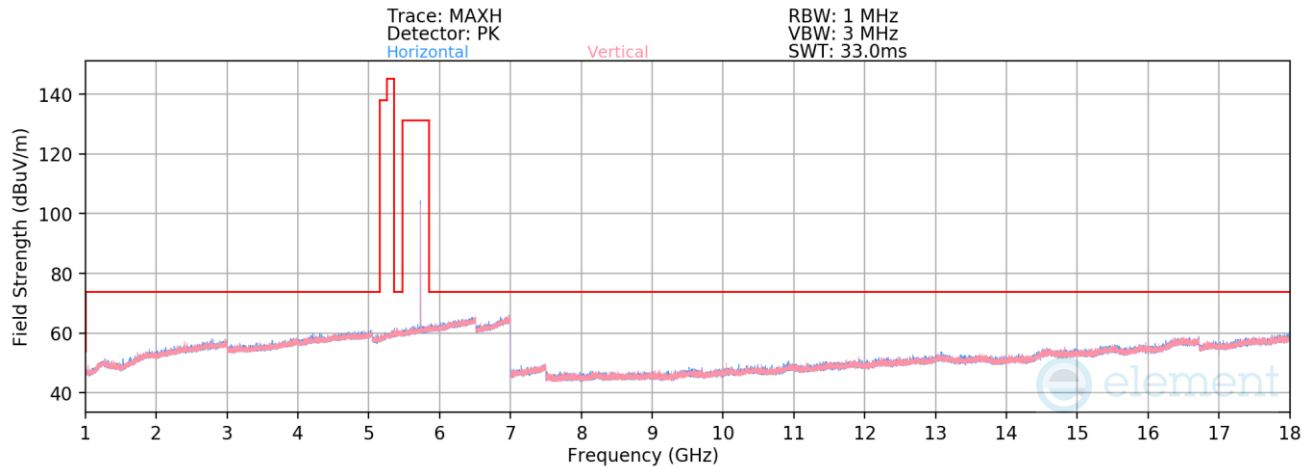


Plot 7-56. Radiated Spurious Emissions 1-18GHz (NB UNII HDRp4 – 5731MHz)

Mode: HDRp4
Data Rate: 4Mbps
Distance of Measurements: 3 Meters
Operating Frequency: 5731MHz

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Duty Cycle Correction [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11462.00	Average	V	104	128	-80.26	12.63	0.58	39.95	53.98	-14.03
* 11462.00	Peak	V	104	128	-69.69	12.63	0.00	49.94	73.98	-24.04
17193.00	Peak	-	-	-	-71.45	21.45	0.00	57.00	68.23	-11.23

Table 7-25. Radiated Spurious Emissions Measurements

FCC ID: BCG-A3440	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/11/2026 - 8/12/2026	EUT Type: Wireless Left Earbud	Approved by: Technical Manager
Test Report S/N: 1C2606090047-04-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 68 of 105

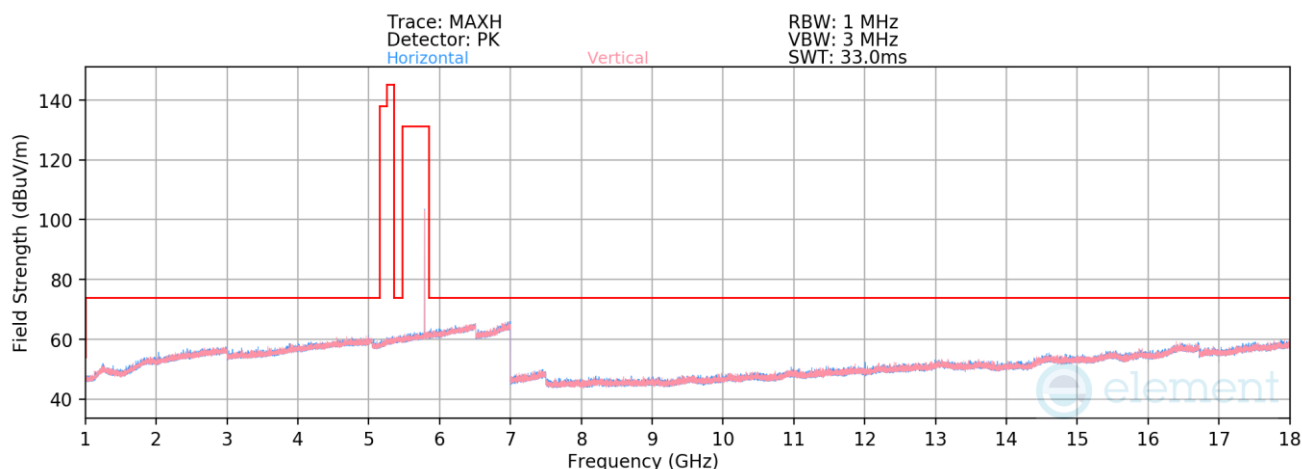

Plot 7-57. Radiated Spurious Emissions 1-18GHz (NB UNII HDRp4 – 5788MHz)

Mode: HDRp4

Data Rate: 4Mbps

Distance of Measurements: 3 Meters


Operating Frequency: 5788MHz

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Duty Cycle Correction [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11576.00	Average	V	275	148	-80.36	12.54	0.58	39.76	53.98	-14.22
* 11576.00	Peak	V	275	148	-69.35	12.54	0.00	50.19	73.98	-23.79
17364.00	Peak	-	-	-	-70.36	21.11	0.00	57.75	68.23	-10.48


Table 7-26. Radiated Spurious Emissions Measurements

FCC ID: BCG-A3440	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/11/2026 - 8/12/2026	EUT Type: Wireless Left Earbud	Approved by: Technical Manager
Test Report S/N: 1C2606090047-04-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 69 of 105

V 12.0 03/03/2026

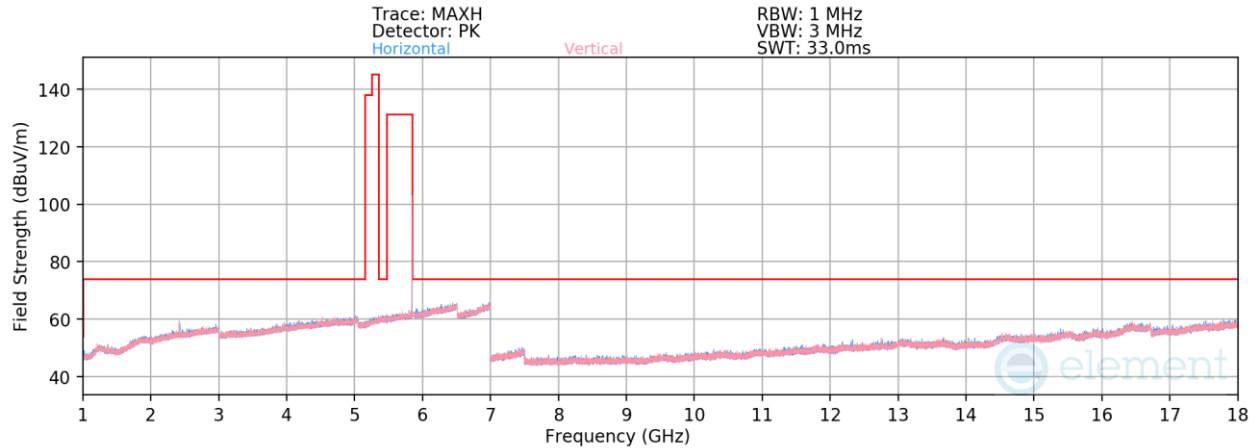

Plot 7-58. Radiated Spurious Emissions 1-18GHz (NB UNII HDRp4 – 5844MHz)

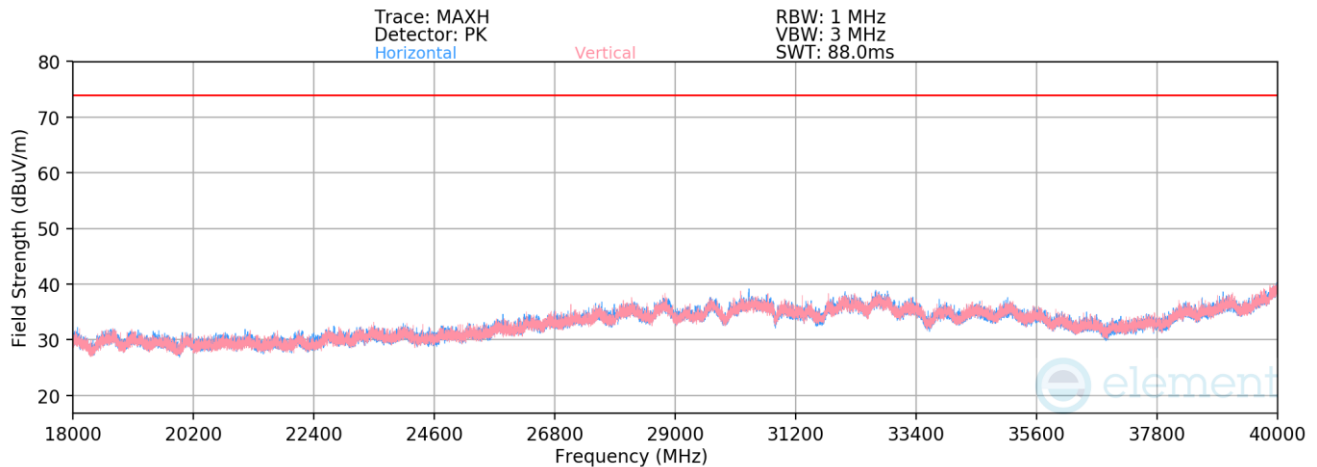

Plot 7-59. Radiated Spurious Emissions Above 18GHz (NB UNII HDRp4 – 5844MHz)


Mode:	HDRp4
Data Rate:	4Mbps
Distance of Measurements:	3 Meters
Operating Frequency:	5844MHz

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Duty Cycle Correction [dB]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11688.00	Average	V	278	134	-79.73	12.54	0.58	0.00	40.39	53.98	-13.59
* 11688.00	Peak	V	278	134	-69.04	12.54	0.00	0.00	50.50	73.98	-23.48
17532.00	Peak	-	-	-	-69.28	21.49	0.00	0.00	59.21	68.23	-9.02
23376.00	Peak	-	-	-	-50.13	-7.45	0.00	-9.54	39.88	68.23	-28.35
29220.00	Peak	V	150	129	-51.82	-4.55	0.00	-9.54	41.09	68.23	-27.14
35064.00	Peak	V	150	126	-49.72	-4.68	0.00	-9.54	43.06	68.23	-25.17


Table 7-27. Radiated Spurious Emissions Measurements

FCC ID: BCG-A3440	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/11/2026 - 8/12/2026	EUT Type: Wireless Left Earbud	Approved by: Technical Manager
Test Report S/N: 1C2606090047-04-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 70 of 105

NB UNII LE1M

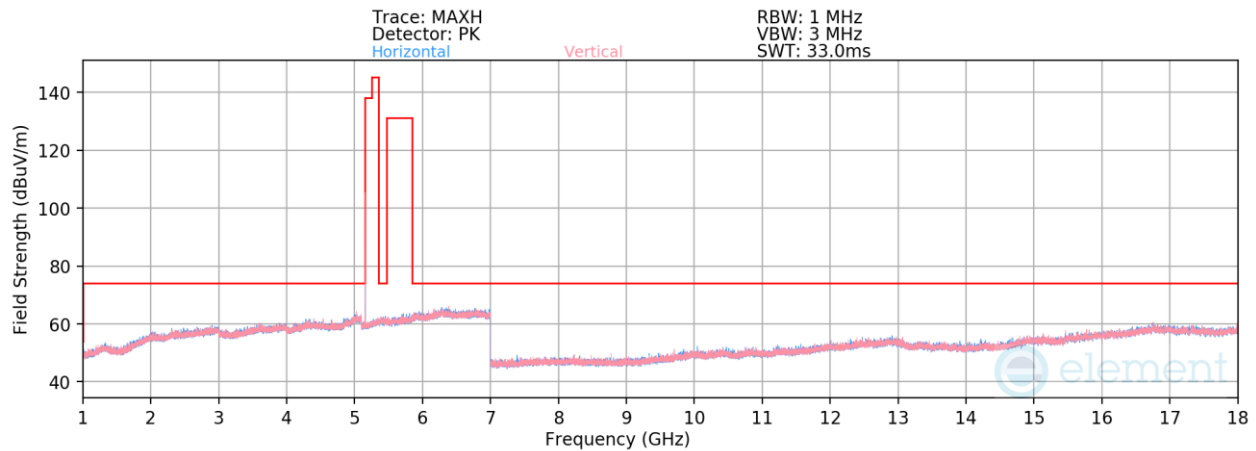

Plot 7-60. Radiated Spurious Emissions 1-18GHz (NB UNII LE1M – 5157MHz)

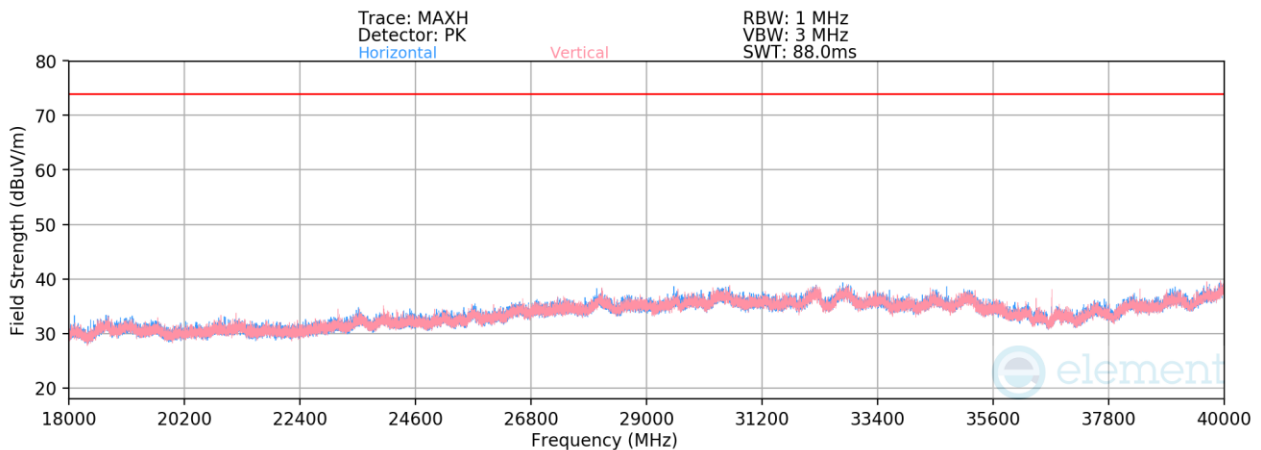


Plot 7-61. Radiated Spurious Emissions Above 18GHz (NB UNII LE1M – 5157MHz)

Mode:	LE
Data Rate:	1Mbps
Distance of Measurements:	3 Meters
Operating Frequency:	5157MHz

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Duty Cycle Correction [dB]	Distance Correction Factor	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10314.00	Peak	H	100	44	-70.07	14.37	0.00	0.00	51.30	68.23	-16.93
* 15471.00	Average	-	-	-	-84.32	21.36	0.00	0.00	44.04	53.98	-9.94
* 15471.00	Peak	-	-	-	-73.60	21.36	0.00	0.00	54.76	73.98	-19.22
* 20628.00	Average	H	150	81	-59.97	-7.52	0.61	-9.54	30.58	53.98	-23.40
* 20628.00	Peak	H	150	81	-49.17	-7.52	0.00	-9.54	40.77	73.98	-33.21
25785.00	Peak	H	150	340	-49.21	-5.69	0.00	-9.54	42.56	68.23	-25.67
30942.00	Peak	V	150	195	-51.76	-3.56	0.00	-9.54	42.14	68.23	-26.09
36099.00	Peak	V	150	49	-44.66	-6.52	0.00	-9.54	46.28	68.23	-21.95

Table 7-28. Radiated Spurious Emissions Measurements

FCC ID: BCG-A3440	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/11/2026 - 8/12/2026	EUT Type: Wireless Left Earbud	Approved by: Technical Manager
Test Report S/N: 1C2606090047-04-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 71 of 105

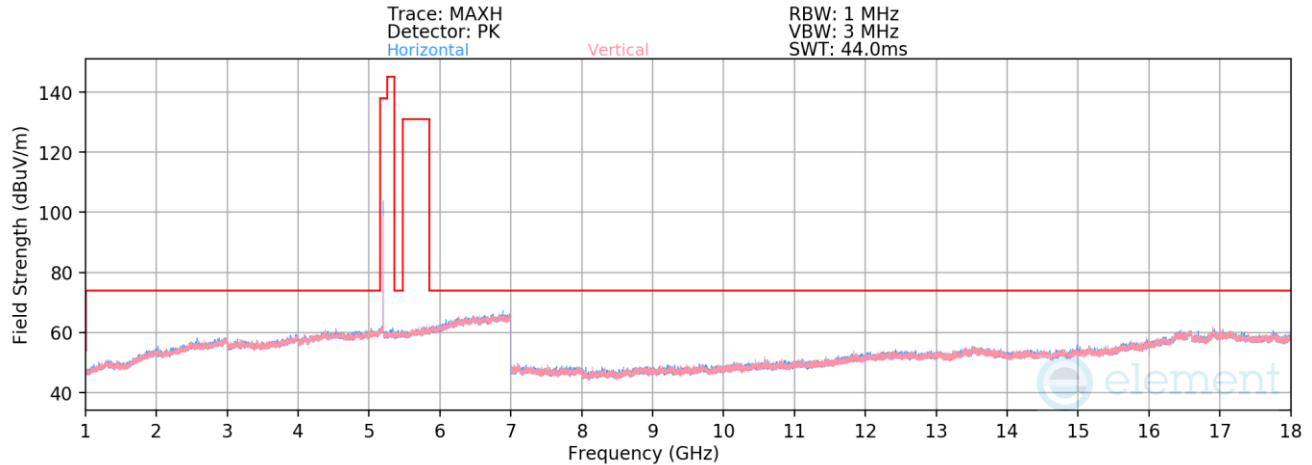

Plot 7-62. Radiated Spurious Emissions 1-18GHz (NB UNII LE1M – 5200MHz)

Mode: LE

Data Rate: 1Mbps


Distance of Measurements: 3 Meters

Operating Frequency: 5200MHz

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10400.00	Peak	-	-	-	-71.82	15.13	50.31	68.23	-17.92
* 15600.00	Average	-	-	-	-84.56	22.82	45.26	53.98	-8.72
* 15600.00	Peak	-	-	-	-73.40	22.82	56.42	73.98	-17.56

Table 7-29. Radiated Spurious Emissions Measurements

FCC ID: BCG-A3440	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/11/2026 - 8/12/2026	EUT Type: Wireless Left Earbud	Approved by: Technical Manager
Test Report S/N: 1C2606090047-04-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 72 of 105

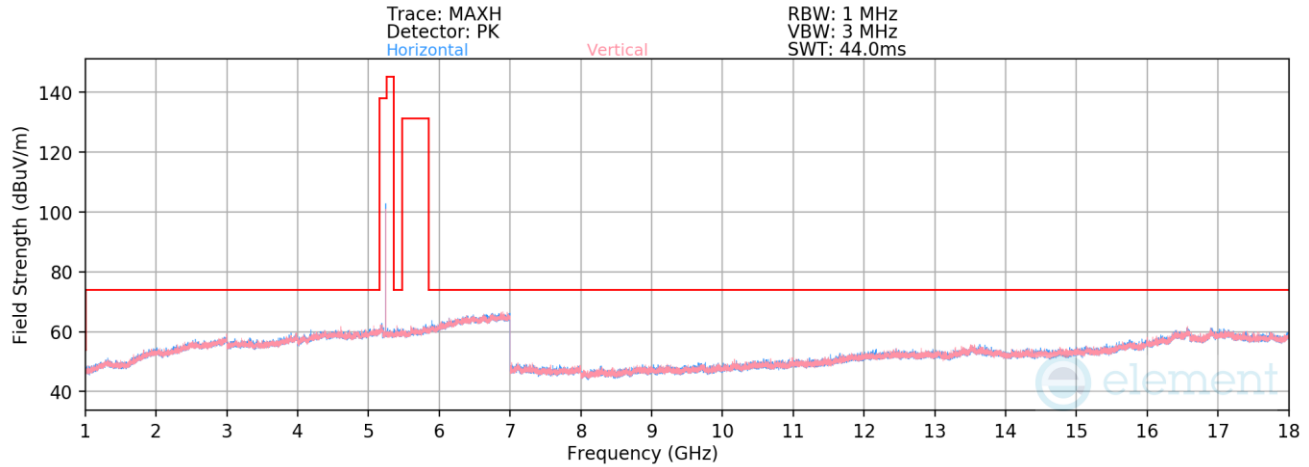

Plot 7-63. Radiated Spurious Emissions 1-18GHz (NB UNII LE1M - 5245MHz)

Mode: LE

Data Rate: 1Mbps


Distance of Measurements: 3 Meters

Operating Frequency: 5245MHz

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10490.00	Peak	-	-	-	-71.38	14.91	50.53	68.23	-17.70
* 15735.00	Average	-	-	-	-84.60	23.32	45.72	53.98	-8.26
* 15735.00	Peak	-	-	-	-72.83	23.32	57.49	73.98	-16.49

Table 7-30. Radiated Spurious Emissions Measurements

FCC ID: BCG-A3440	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/11/2026 - 8/12/2026	EUT Type: Wireless Left Earbud	Approved by: Technical Manager
Test Report S/N: 1C2606090047-04-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 73 of 105

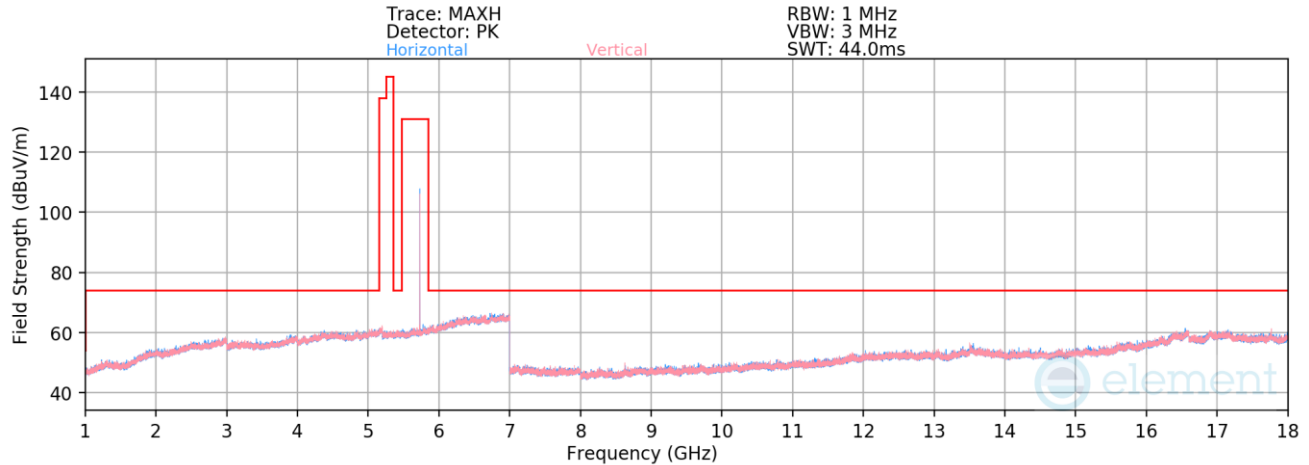

Plot 7-64. Radiated Spurious Emissions 1-18GHz (NB UNII LE1M – 5731MHz)

Mode: LE

Data Rate: 1Mbps


Distance of Measurements: 3 Meters

Operating Frequency: 5731MHz

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Duty Cycle Correction [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11462.00	Average	V	275	205	-81.28	16.76	0.61	43.09	53.98	-10.89
* 11462.00	Peak	V	275	205	-71.48	16.76	0.00	52.28	73.98	-21.70
17193.00	Peak	-	-	-	-72.53	25.08	0.00	59.55	68.23	-8.68

Table 7-31. Radiated Spurious Emissions Measurements

FCC ID: BCG-A3440	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/11/2026 - 8/12/2026	EUT Type: Wireless Left Earbud	Approved by: Technical Manager
Test Report S/N: 1C2606090047-04-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 74 of 105

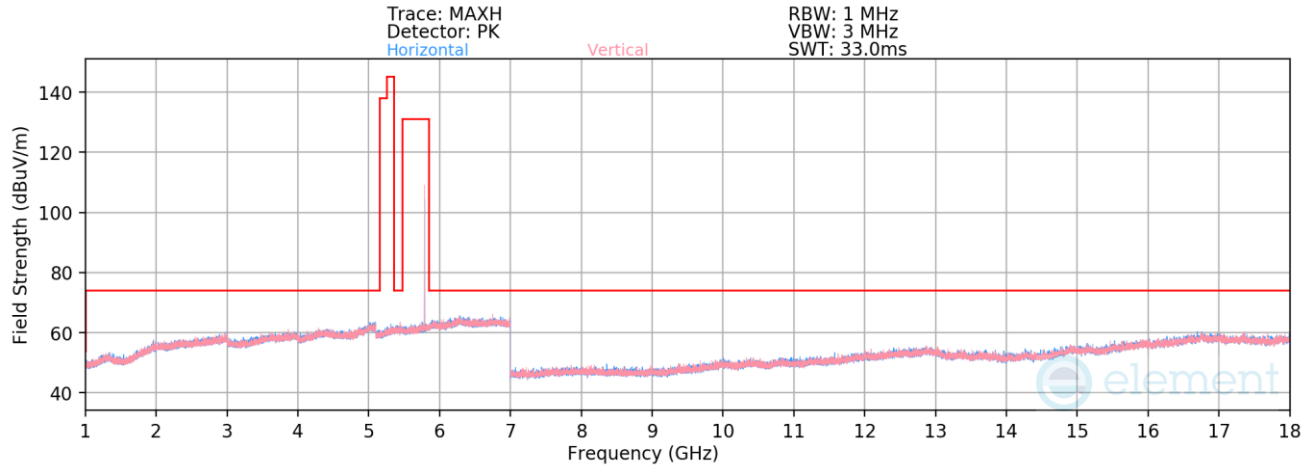

Plot 7-65. Radiated Spurious Emissions 1-18GHz (NB UNII LE1M – 5788MHz)

Mode: LE

Data Rate: 1Mbps


Distance of Measurements: 3 Meters

Operating Frequency: 5788MHz


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Duty Cycle Correction [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11576.00	Average	V	100	82	-83.32	17.63	0.61	41.92	53.98	-12.06
* 11576.00	Peak	V	100	82	-72.13	17.63	0.00	52.50	73.98	-21.48
17364.00	Peak	-	-	-	-72.46	26.01	0.00	60.55	68.23	-7.68

Table 7-32. Radiated Spurious Emissions Measurements

FCC ID: BCG-A3440	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/11/2026 - 8/12/2026	EUT Type: Wireless Left Earbud	Approved by: Technical Manager
Test Report S/N: 1C2606090047-04-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 75 of 105

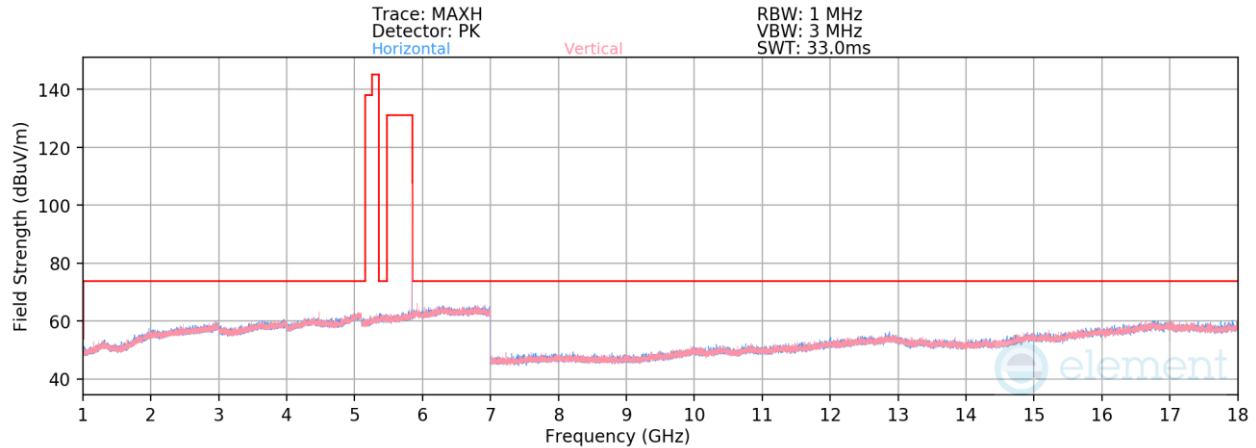

Plot 7-66. Radiated Spurious Emissions 1-18GHz (NB UNII LE1M - 5844MHz)

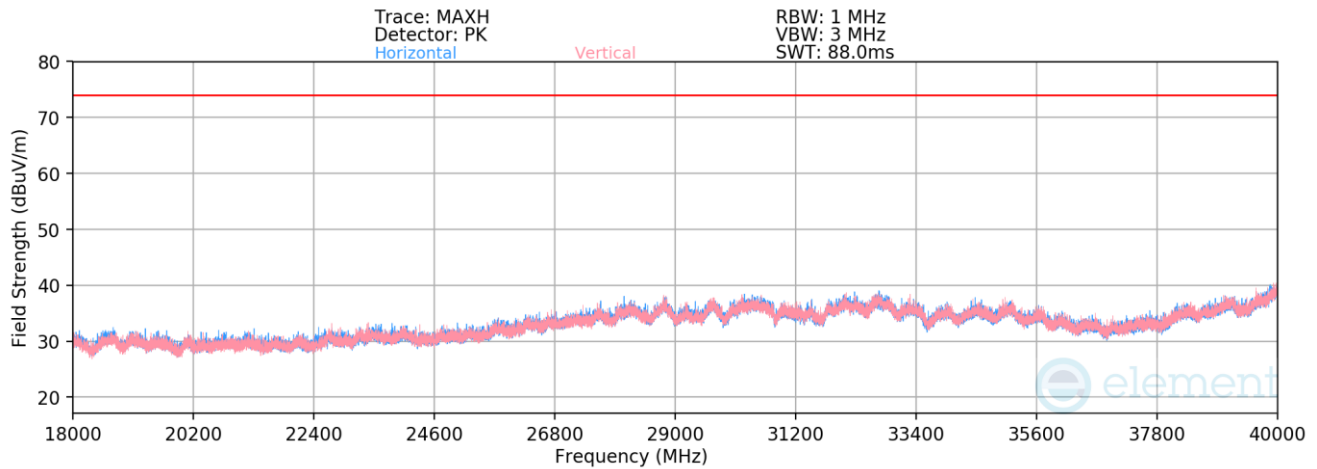

Plot 7-67. Radiated Spurious Emissions Above 18GHz (NB UNII LE1M - 5844MHz)

Mode: LE

Data Rate: 1Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 5844MHz


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Duty Cycle Correction [dB]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11688.00	Average	H	135	86	-79.76	12.54	1.07	0.00	40.85	53.98	-13.13
* 11688.00	Peak	H	135	86	-68.84	12.54	0.00	0.00	50.70	73.98	-23.28
17532.00	Peak	-	-	-	-69.91	21.49	0.00	0.00	58.58	68.23	-9.65
23376.00	Peak	-	-	-	-60.61	-6.78	0.00	-9.54	30.07	68.23	-38.16
29220.00	Peak	V	150	143	-60.75	-4.20	0.00	-9.54	32.51	68.23	-35.72
35064.00	Peak	-	-	-	-59.98	-4.41	0.00	-9.54	33.07	68.23	-35.16

Table 7-33. Radiated Spurious Emissions Measurements

FCC ID: BCG-A3440	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/11/2026 - 8/12/2026	EUT Type: Wireless Left Earbud	Approved by: Technical Manager
Test Report S/N: 1C2606090047-04-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 76 of 105


7.6.2 Radiated Band Edge Measurements (U-NII-1)

Mode: BDR
 Distance of Measurements: 3 Meters
 Operating Frequency: 5157MHz

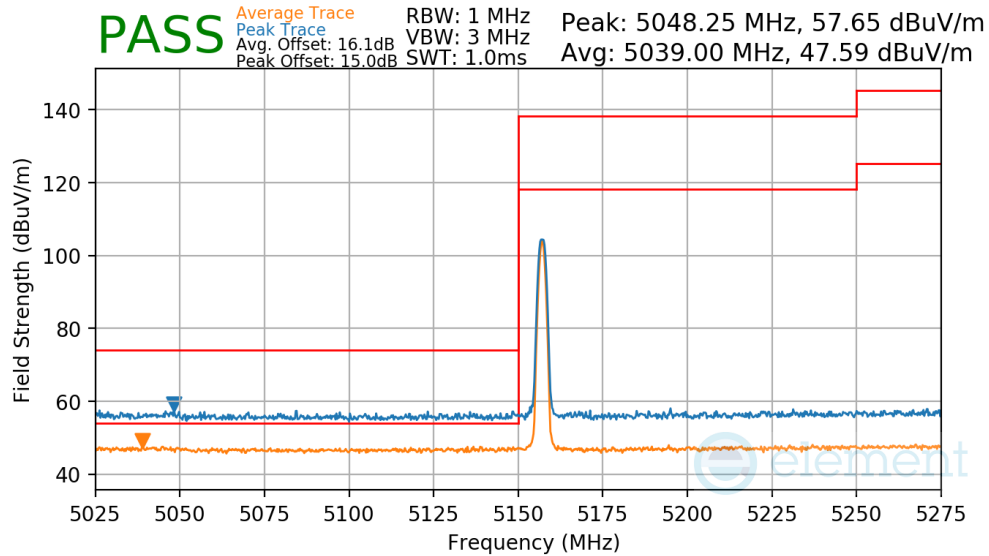

Plot 7-68. Radiated Lower Band Edge Measurement


Mode: LE1M
 Distance of Measurements: 3 Meters
 Operating Frequency: 5157MHz

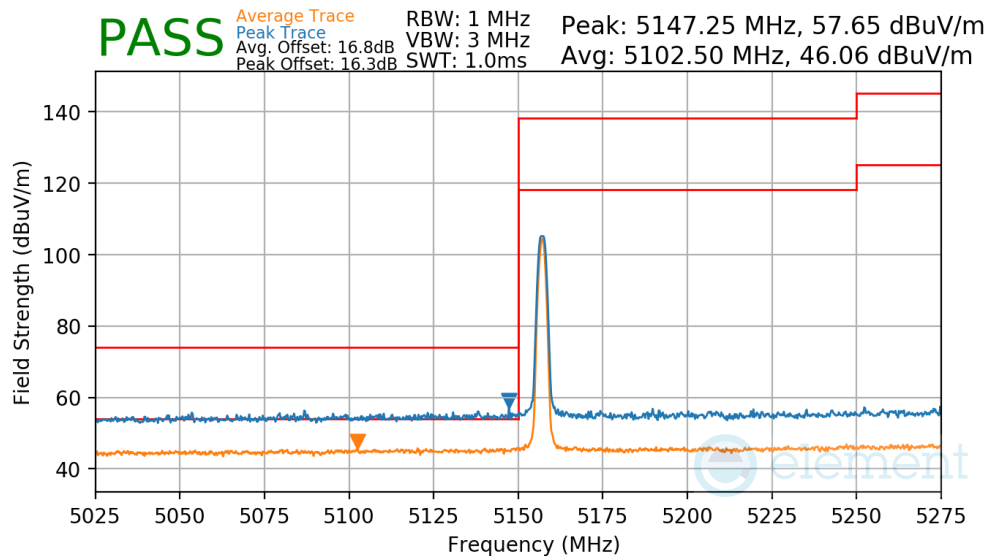

Plot 7-69. Radiated Lower Band Edge Measurement


FCC ID: BCG-A3440	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/11/2026 - 8/12/2026	EUT Type: Wireless Left Earbud	Approved by: Technical Manager
Test Report S/N: 1C2606090047-04-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 77 of 105

Mode: LE2M
Distance of Measurements: 3 Meters
Operating Frequency: 5157MHz

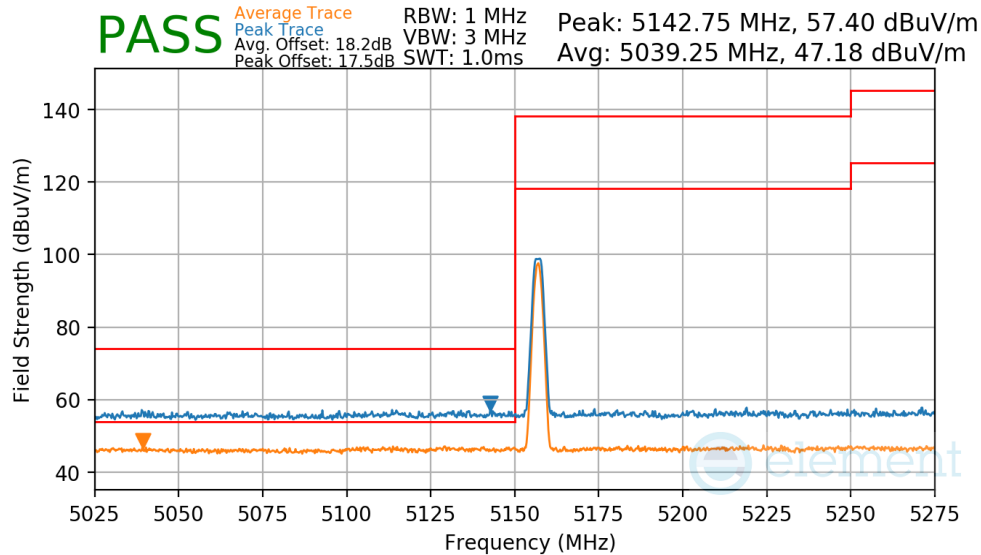

Plot 7-70. Radiated Lower Band Edge Measurement


Mode: HDR4
Distance of Measurements: 3 Meters
Operating Frequency: 5157MHz

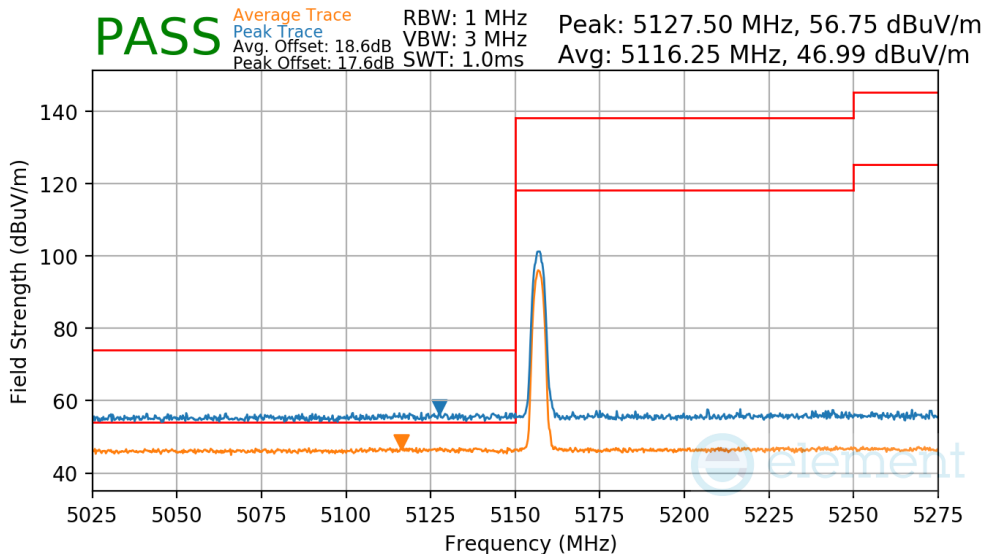

Plot 7-71. Radiated Lower Band Edge Measurement


FCC ID: BCG-A3440	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/11/2026 - 8/12/2026	EUT Type: Wireless Left Earbud	Approved by: Technical Manager
Test Report S/N: 1C2606090047-04-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 78 of 105

Mode: HDR8
 Distance of Measurements: 3 Meters
 Operating Frequency: 5157MHz

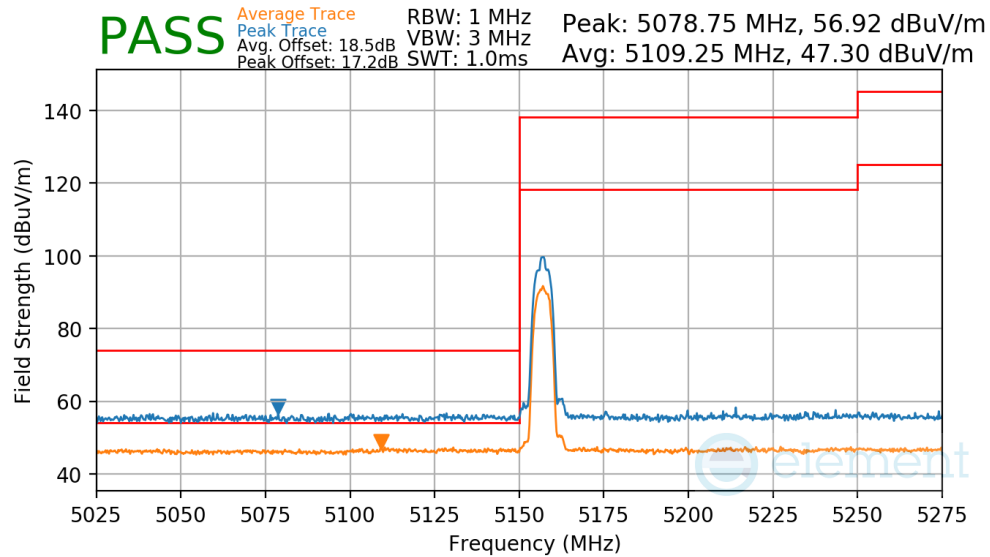

Plot 7-72. Radiated Lower Band Edge Measurement


Mode: HDRp4
 Distance of Measurements: 3 Meters
 Operating Frequency: 5157MHz

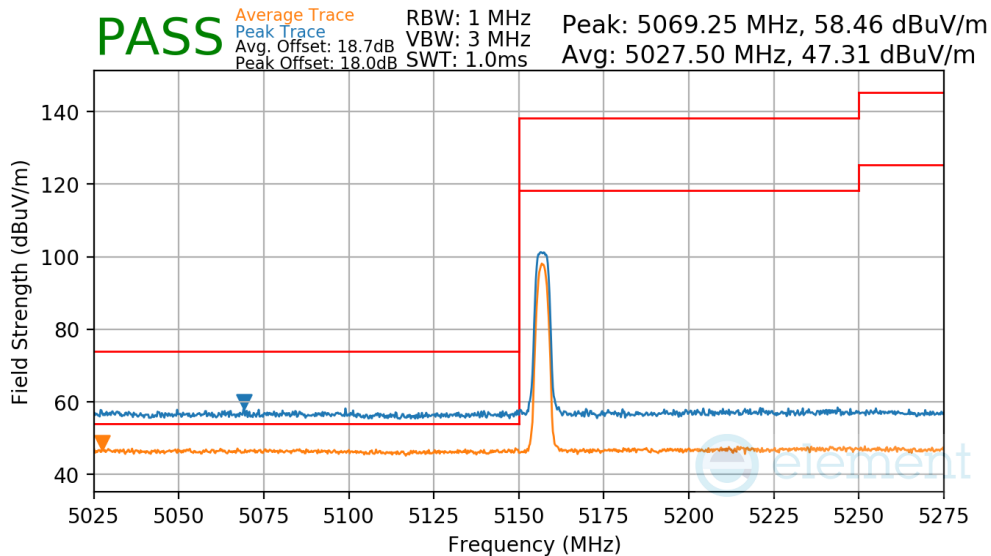

Plot 7-73. Radiated Lower Band Edge Measurement

FCC ID: BCG-A3440	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/11/2026 - 8/12/2026	EUT Type: Wireless Left Earbud	Approved by: Technical Manager
Test Report S/N: 1C2606090047-04-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 79 of 105

Mode: HDRp8
 Distance of Measurements: 3 Meters
 Operating Frequency: 5157MHz

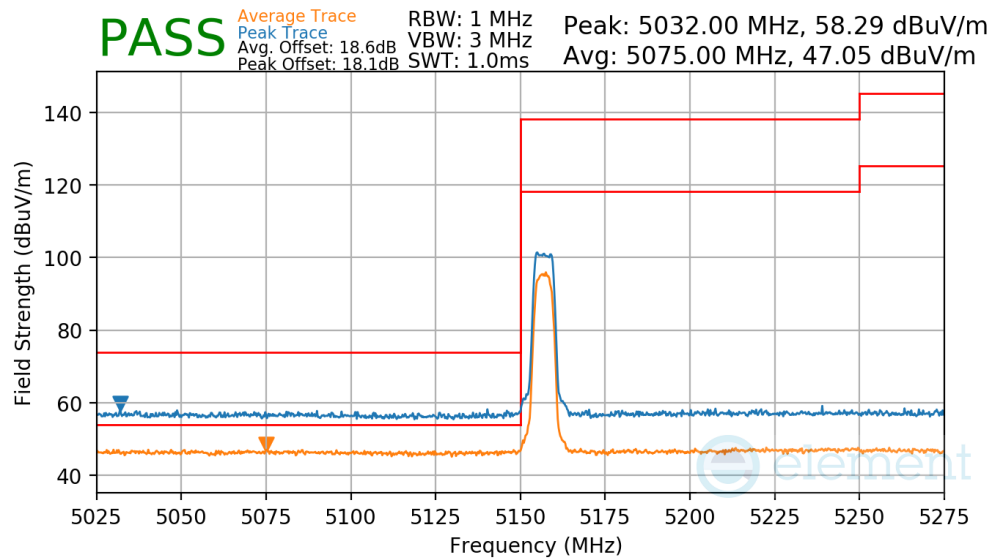


Plot 7-74. Radiated Lower Band Edge Measurement

FCC ID: BCG-A3440	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/11/2026 - 8/12/2026	EUT Type: Wireless Left Earbud	Approved by: Technical Manager
Test Report S/N: 1C2606090047-04-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 80 of 105

V 12.0 03/03/2026


7.6.3 Radiated Band Edge Measurements (U-NII-3)

Mode: BDR
 Distance of Measurements: 3 Meters
 Operating Frequency: 5731MHz

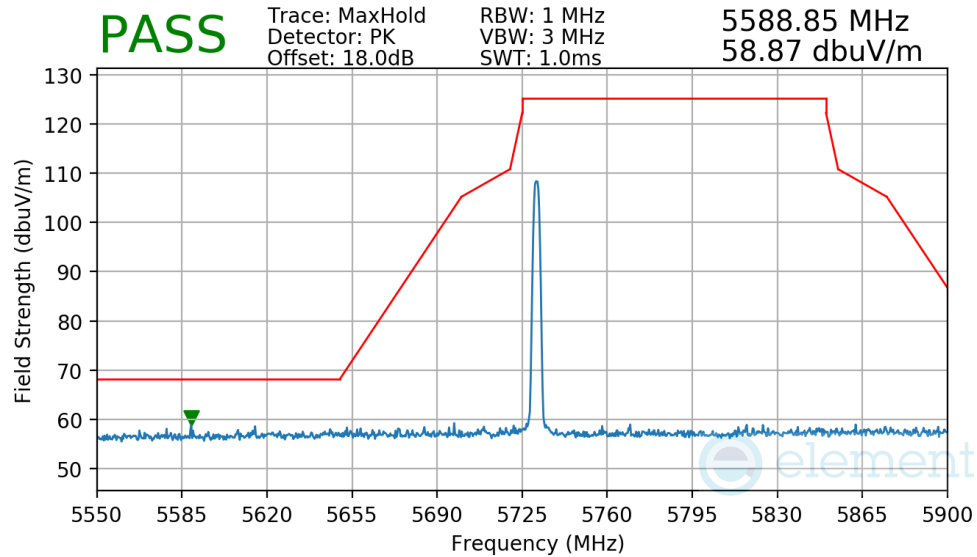

Plot 7-75. Radiated Lower Band Edge Measurement


Mode: LE1M
 Distance of Measurements: 3 Meters
 Operating Frequency: 5731MHz

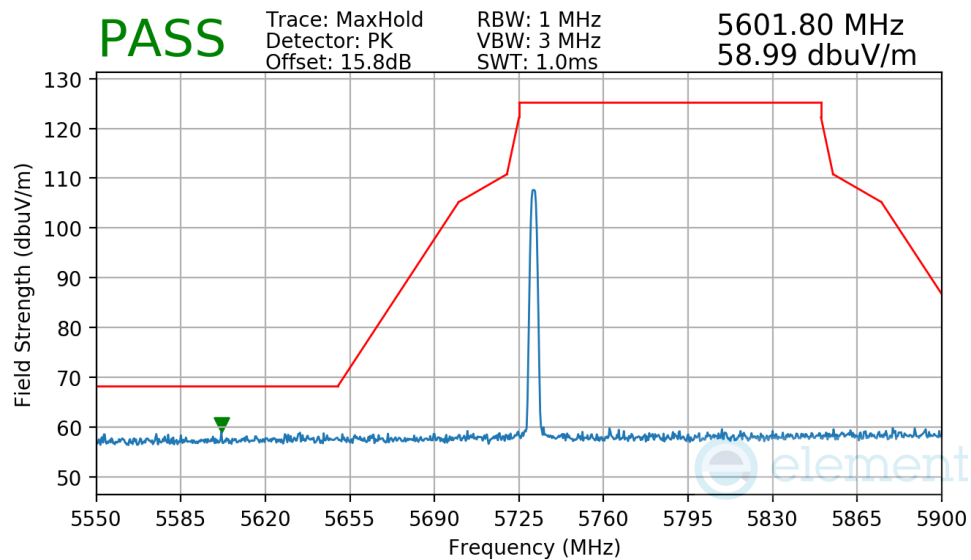

Plot 7-76. Radiated Lower Band Edge Measurement


FCC ID: BCG-A3440	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/11/2026 - 8/12/2026	EUT Type: Wireless Left Earbud	Approved by: Technical Manager
Test Report S/N: 1C2606090047-04-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 81 of 105

Mode: LE2M
Distance of Measurements: 3 Meters
Operating Frequency: 5731MHz

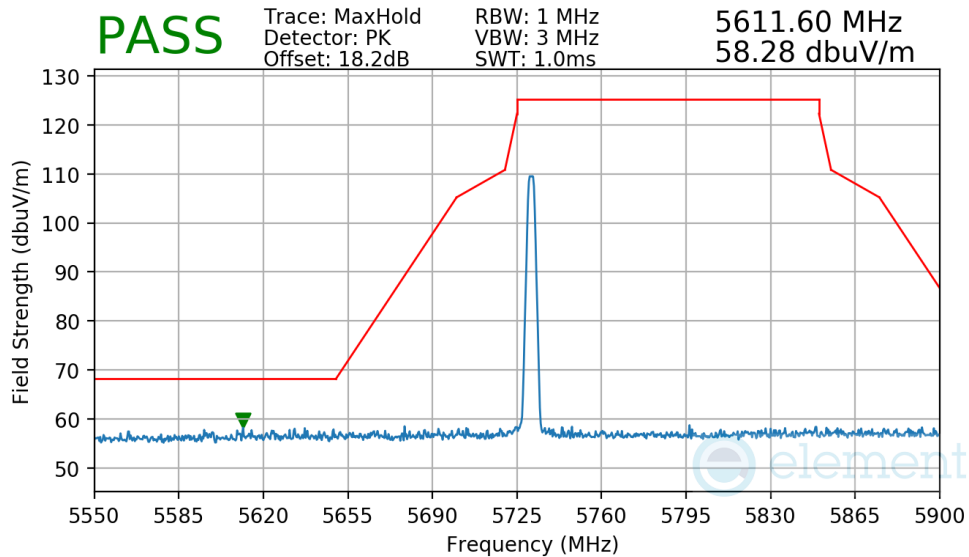

Plot 7-77. Radiated Lower Band Edge Measurement


Mode: HDR4
Distance of Measurements: 3 Meters
Operating Frequency: 5731MHz

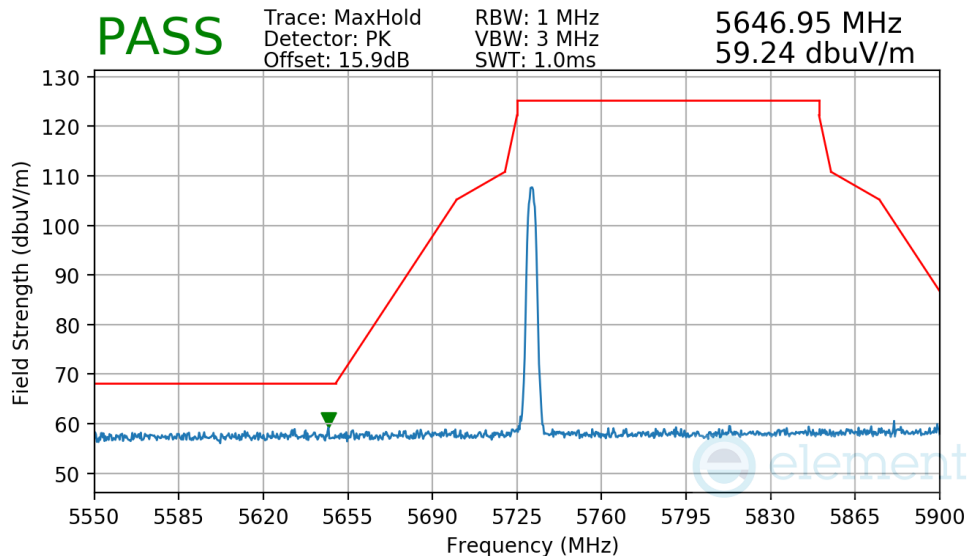

Plot 7-78. Radiated Lower Band Edge Measurement


FCC ID: BCG-A3440	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/11/2026 - 8/12/2026	EUT Type: Wireless Left Earbud	Approved by: Technical Manager
Test Report S/N: 1C2606090047-04-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 82 of 105

Mode: HDR8
Distance of Measurements: 3 Meters
Operating Frequency: 5731MHz

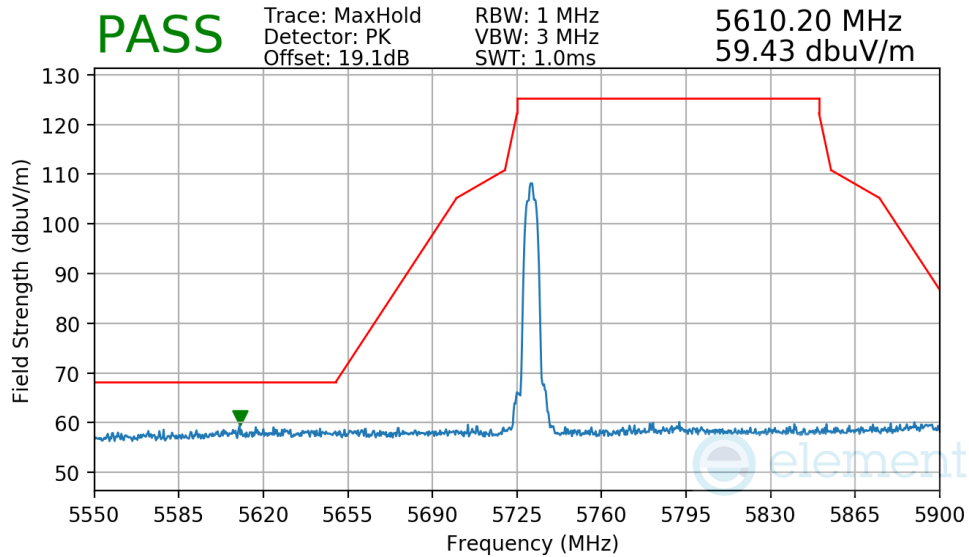

Plot 7-79. Radiated Lower Band Edge Measurement


Mode: HDRp4
Distance of Measurements: 3 Meters
Operating Frequency: 5731MHz

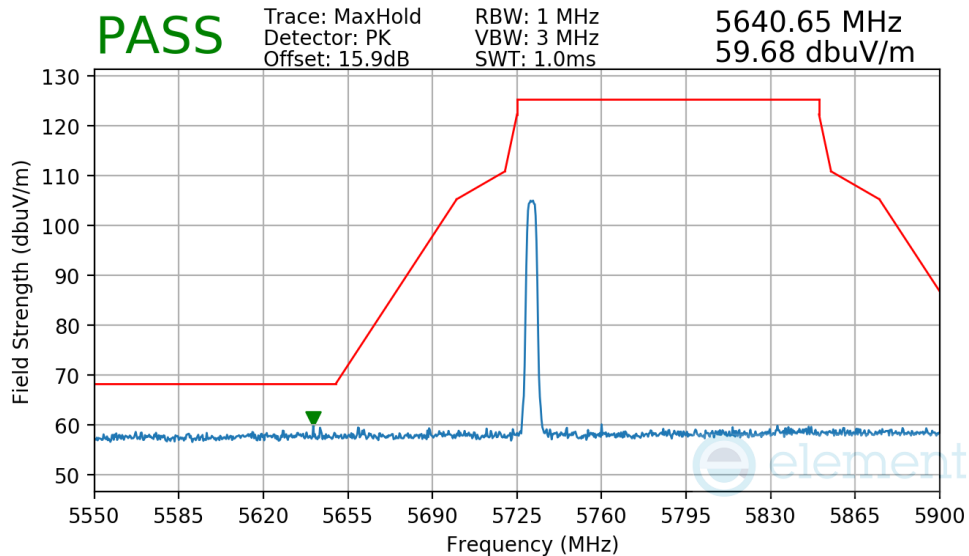

Plot 7-80. Radiated Lower Band Edge Measurement


FCC ID: BCG-A3440	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/11/2026 - 8/12/2026	EUT Type: Wireless Left Earbud	Approved by: Technical Manager
Test Report S/N: 1C2606090047-04-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 83 of 105

Mode: HDRp8
Distance of Measurements: 3 Meters
Operating Frequency: 5731MHz

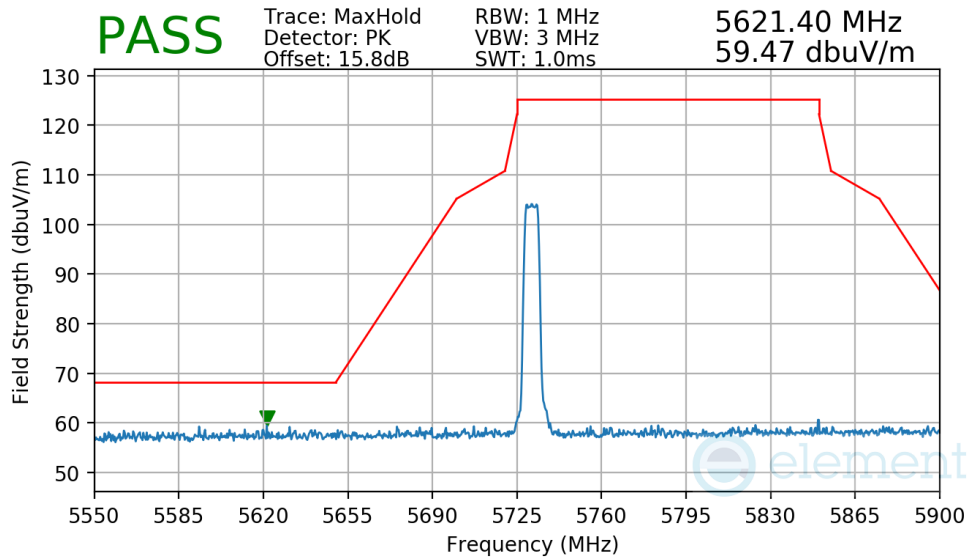

Plot 7-81. Radiated Lower Band Edge Measurement


Mode: BDR
Distance of Measurements: 3 Meters
Operating Frequency: 5844MHz

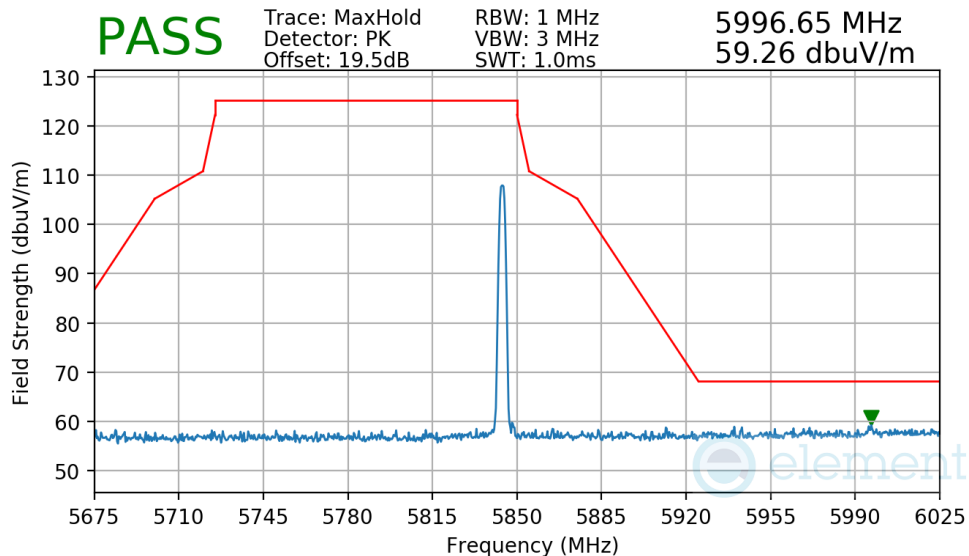

Plot 7-82. Radiated Higher Band Edge Measurement


FCC ID: BCG-A3440	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/11/2026 - 8/12/2026	EUT Type: Wireless Left Earbud	Approved by: Technical Manager
Test Report S/N: 1C2606090047-04-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 84 of 105

Mode: LE1M
Distance of Measurements: 3 Meters
Operating Frequency: 5844MHz

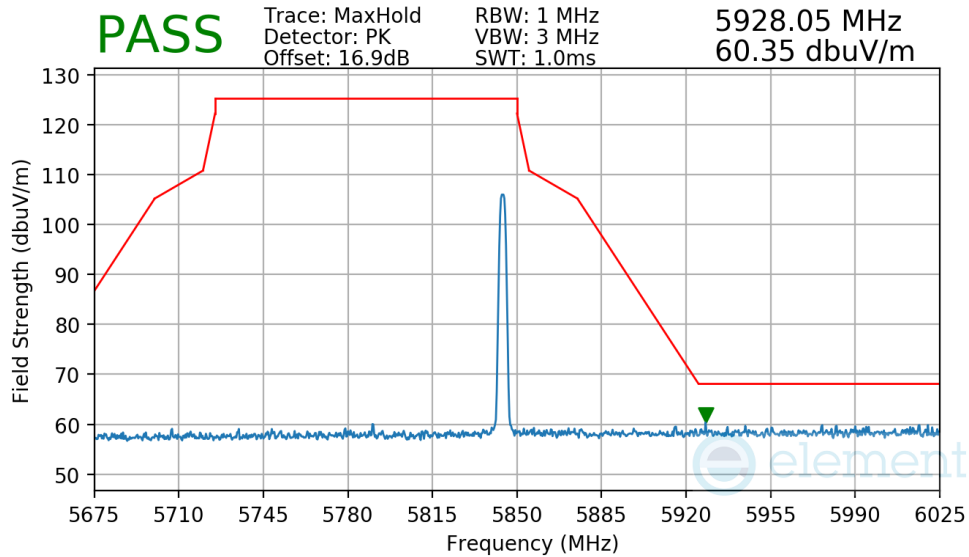

Plot 7-83. Radiated Higher Band Edge Measurement


Mode: LE2M
Distance of Measurements: 3 Meters
Operating Frequency: 5844MHz

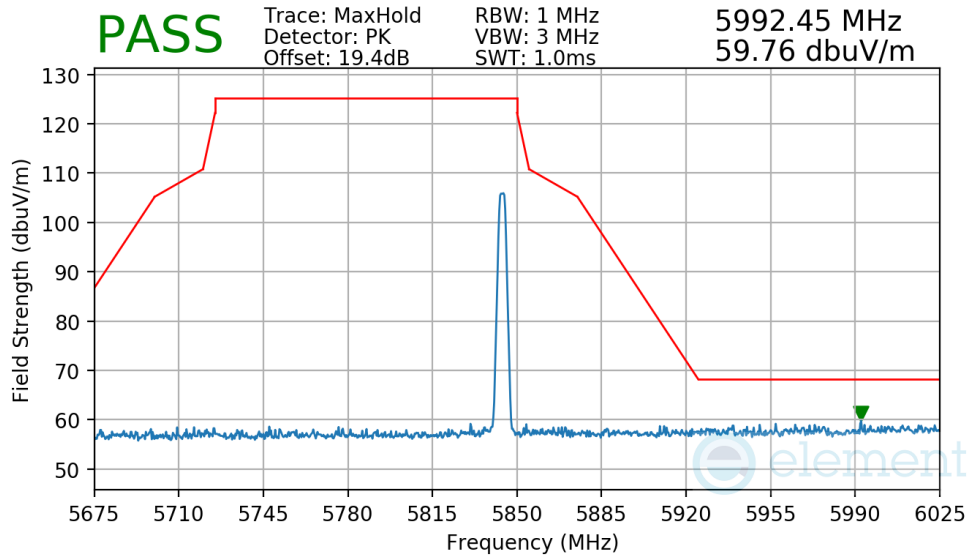

Plot 7-84. Radiated Higher Band Edge Measurement


FCC ID: BCG-A3440	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/11/2026 - 8/12/2026	EUT Type: Wireless Left Earbud	Approved by: Technical Manager
Test Report S/N: 1C2606090047-04-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 85 of 105

Mode: HDR4
Distance of Measurements: 3 Meters
Operating Frequency: 5844MHz

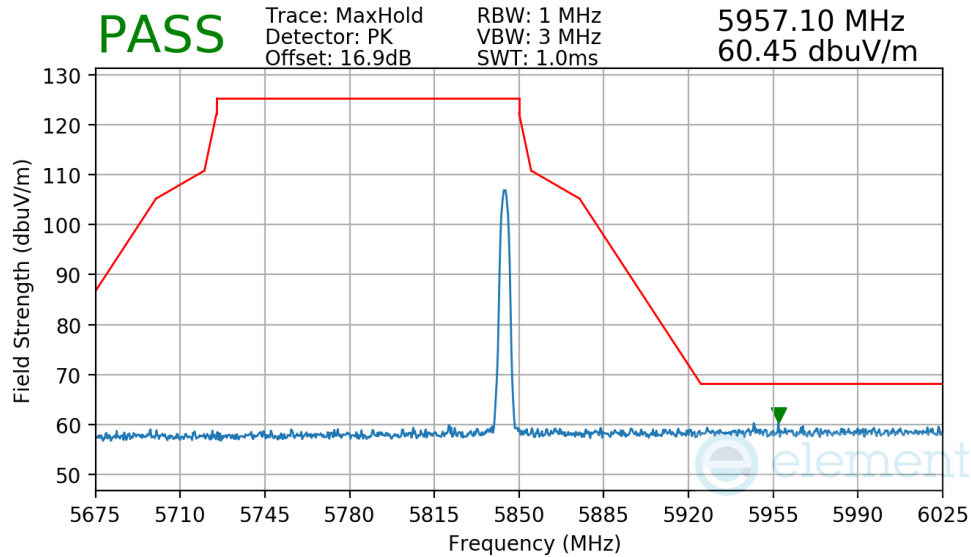

Plot 7-85. Radiated Higher Band Edge Measurement


Mode: HDR8
Distance of Measurements: 3 Meters
Operating Frequency: 5844MHz

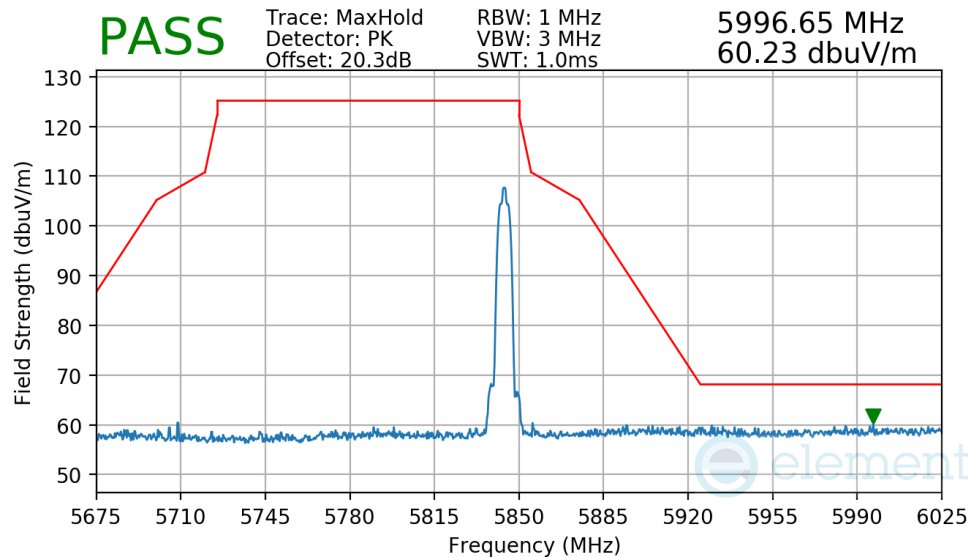

Plot 7-86. Radiated Higher Band Edge Measurement


FCC ID: BCG-A3440	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/11/2026 - 8/12/2026	EUT Type: Wireless Left Earbud	Approved by: Technical Manager
Test Report S/N: 1C2606090047-04-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 86 of 105

Mode: HDRp4
 Distance of Measurements: 3 Meters
 Operating Frequency: 5844MHz

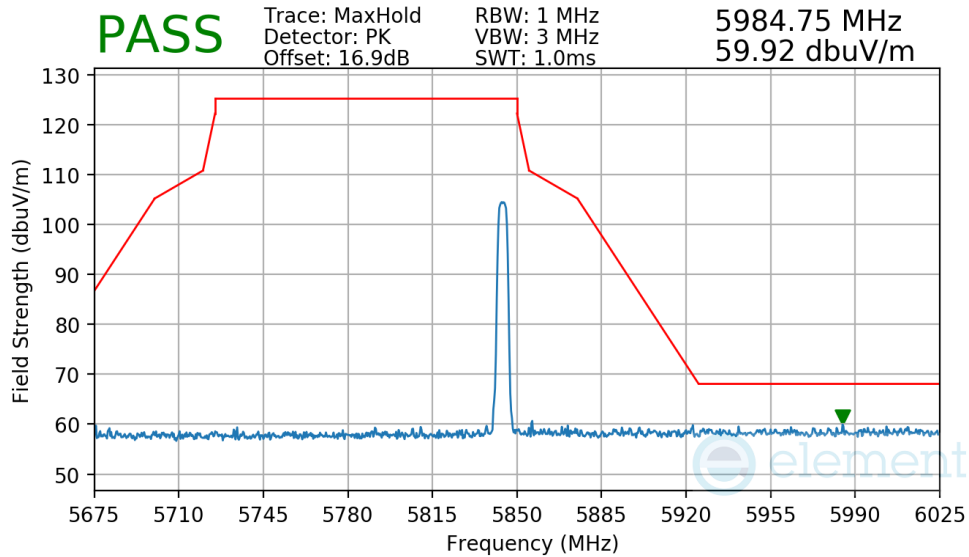

Plot 7-87. Radiated Higher Band Edge Measurement

Mode: HDRp8
 Distance of Measurements: 3 Meters
 Operating Frequency: 5844MHz

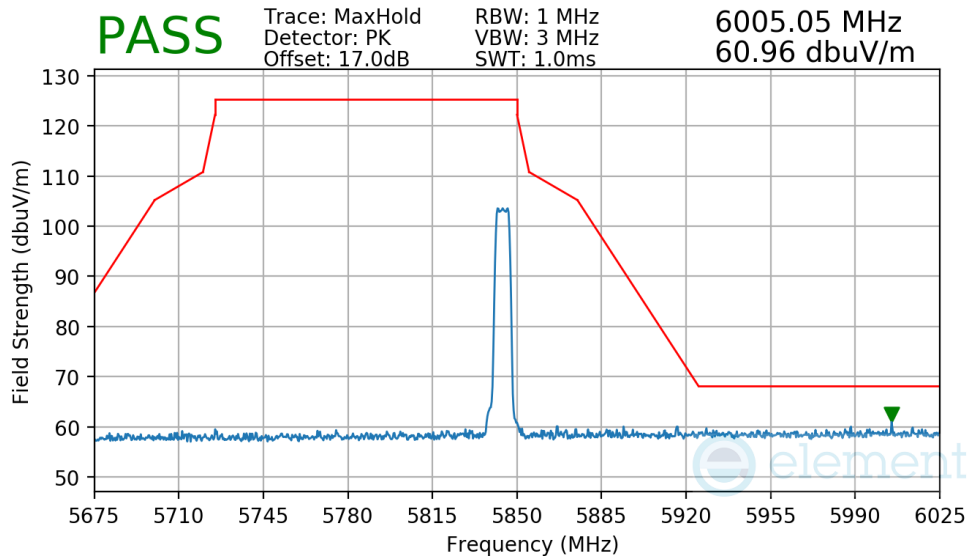

Plot 7-88. Radiated Higher Band Edge Measurement

FCC ID: BCG-A3440	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/11/2026 - 8/12/2026	EUT Type: Wireless Left Earbud	Approved by: Technical Manager
Test Report S/N: 1C2606090047-04-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 87 of 105

7.7 Radiated Spurious Emissions – Below 1GHz

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 must not exceed the limits shown in Table 7-34 per Section 15.209.

Frequency	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-34. Radiated Limits

Test Procedures Used

ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. VBW = 300kHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: BCG-A3440	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/11/2026 - 8/12/2026	EUT Type: Wireless Left Earbud	Approved by: Technical Manager
Test Report S/N: 1C2606090047-04-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 88 of 105

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

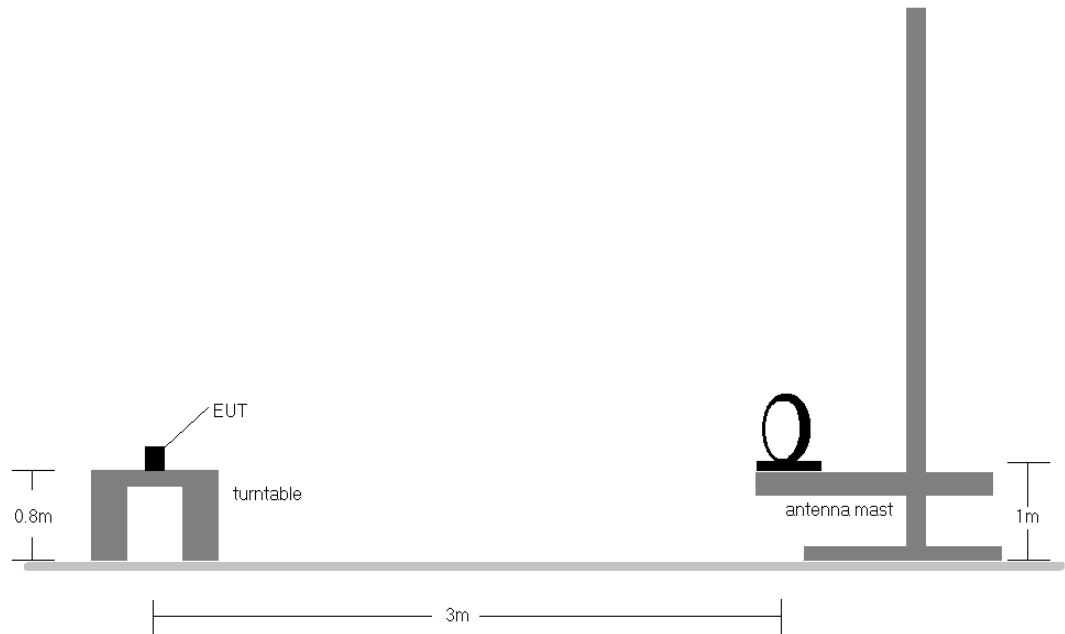


Figure 7-6. Radiated Test Setup < 30MHz

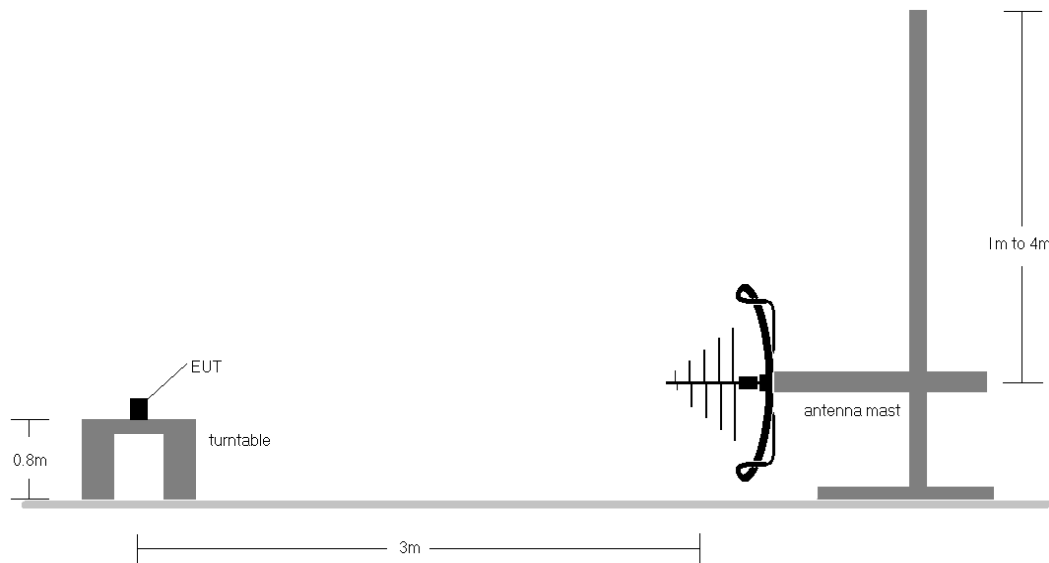


Figure 7-7. Radiated Test Setup < 1GHz

FCC ID: BCG-A3440	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/11/2026 - 8/12/2026	EUT Type: Wireless Left Earbud	Approved by: Technical Manager
Test Report S/N: 1C2606090047-04-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 89 of 105

Test Notes

1. All emissions lying in restricted bands specified in §15.205 are below the limit shown in Table 7-34.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes. For below 30MHz the loop antenna was positioned in 3 orthogonal planes (X front, Y side, Z top) to determine the orientation resulting in the worst case emissions.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector for emissions within 6dB of the limit.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. All supported modulation and power schemes have been tested on the unit and only worst case configuration is reported.
10. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT charged by charging case and powered by AC/DC adaptor with USB-C cable
 - b. EUT charged by charging case and powered by host PC with USB-C cable


Sample Calculations

Determining Spurious Emissions Levels

- Field Strength Level $_{[dB\mu V/m]} = \text{Analyzer Level}_{[dBm]} + 107 + \text{AFCL}_{[dB/m]}$
- $\text{AFCL}_{[dB/m]} = \text{Antenna Factor}_{[dB/m]} + \text{Cable Loss}_{[dB]} - \text{Preamplifier Gain}_{[dB]}$
- $\text{Margin}_{[dB]} = \text{Field Strength Level}_{[dB\mu V/m]} - \text{Limit}_{[dB\mu V/m]}$

FCC ID: BCG-A3440	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/11/2026 - 8/12/2026	EUT Type: Wireless Left Earbud	Approved by: Technical Manager
Test Report S/N: 1C2606090047-04-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 90 of 105

Radiated Spurious Emissions (Below 1GHz)

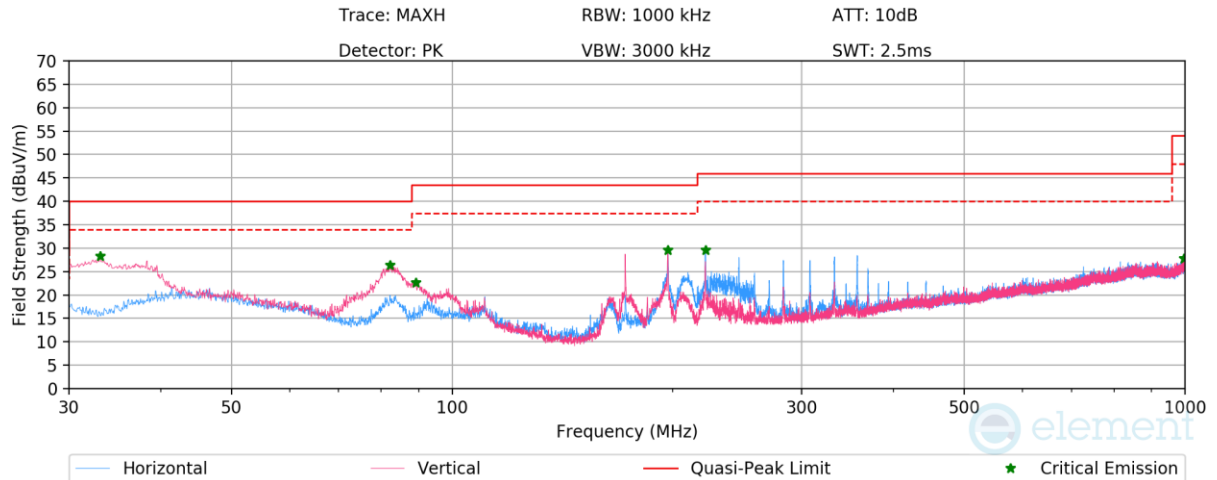


Plot 7-89. Radiated Spurious Emissions Below 1GHz (NB UNII BDR – 5844MHz), with AC/DC adaptor

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
33.12	Max-Peak	V	100	302	-58.33	-20.41	28.26	40.00	-11.74
82.20	Max-Peak	V	100	54	-57.64	-22.97	26.39	40.00	-13.61
89.16	Max-Peak	V	100	121	-63.66	-20.70	22.63	43.50	-20.87
197.05	Max-Peak	H	100	177	-60.10	-17.32	29.58	43.50	-13.92
221.53	Max-Peak	H	100	116	-60.11	-17.25	29.64	46.00	-16.36
995.50	Max-Peak	H	100	137	-76.47	-2.79	27.74	54.00	-26.26

Table 7-35. Radiated Spurious Emissions Below 1GHz (NB UNII BDR – 5844MHz), with AC/DC adaptor

FCC ID: BCG-A3440	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/11/2026 - 8/12/2026	EUT Type: Wireless Left Earbud	Approved by: Technical Manager
Test Report S/N: 1C2606090047-04-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 91 of 105

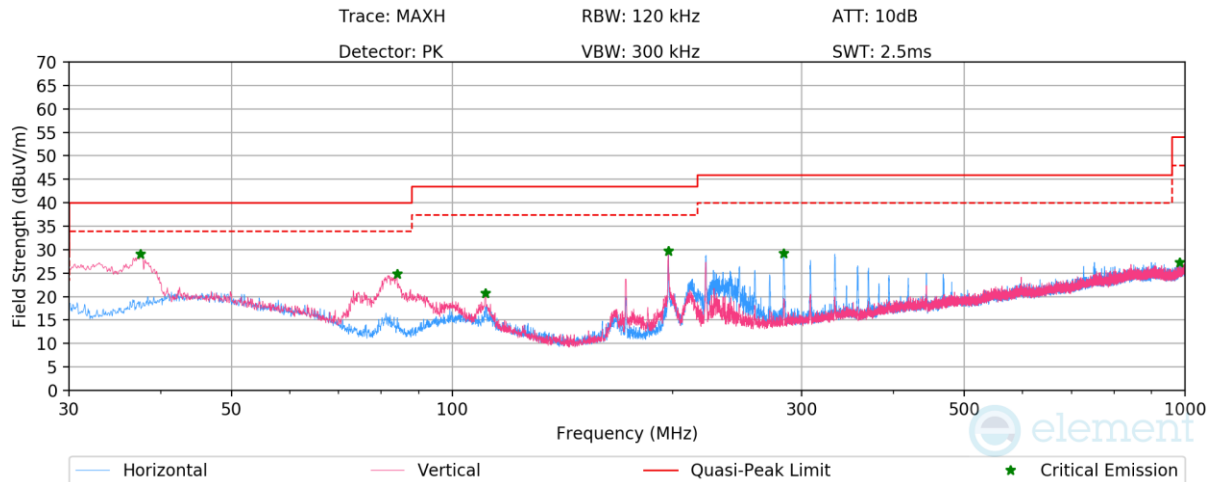


Plot 7-90. Radiated Spurious Emissions Below 1GHz (NB UNII HDR4 – 5844MHz), with AC/DC adaptor

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
37.56	Max-Peak	V	100	267	-59.18	-18.74	29.08	40.00	-10.92
84.06	Max-Peak	V	100	292	-59.81	-22.35	24.84	40.00	-15.16
111.06	Max-Peak	V	100	125	-67.46	-18.84	20.70	43.50	-22.80
197.35	Max-Peak	H	100	29	-59.91	-17.34	29.75	43.50	-13.75
283.57	Max-Peak	H	100	221	-62.28	-15.47	29.26	46.00	-16.74
982.90	Max-Peak	H	100	325	-76.44	-3.26	27.30	54.00	-26.70

Table 7-36. Radiated Spurious Emissions Below 1GHz (NB UNII HDR4 – 5844MHz), with AC/DC adaptor

FCC ID: BCG-A3440	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/11/2026 - 8/12/2026	EUT Type: Wireless Left Earbud	Approved by: Technical Manager
Test Report S/N: 1C2606090047-04-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 92 of 105

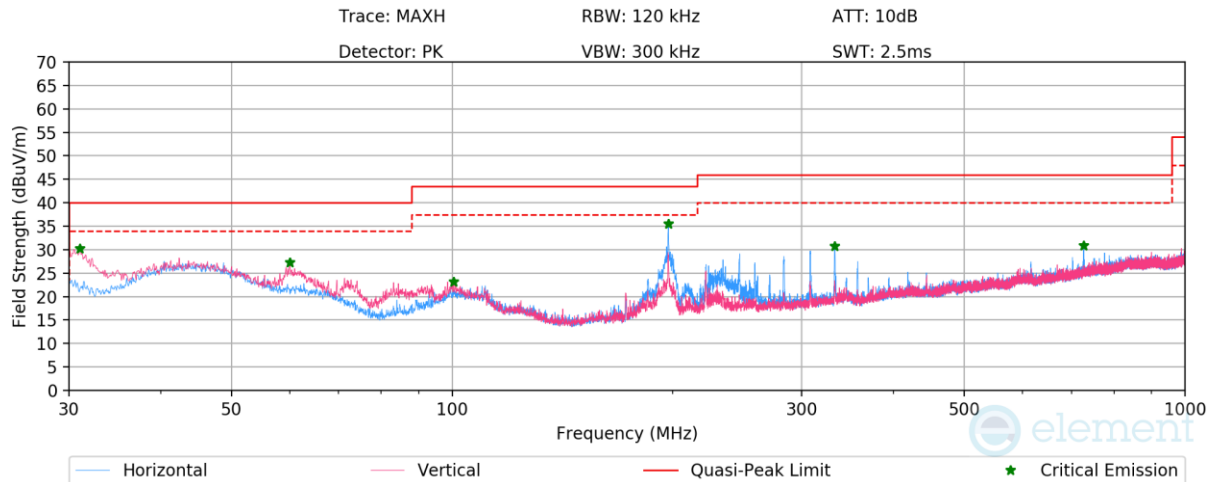


Plot 7-91. Radiated Spurious Emissions Below 1GHz (NB UNII HDRp4 – 5844MHz), with AC/DC adaptor

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
31.05	Max-Peak	V	100	0	-57.39	-19.35	30.26	40.00	-9.74
60.03	Max-Peak	V	100	252	-62.82	-16.94	27.24	40.00	-12.76
100.41	Max-Peak	V	100	170	-66.08	-17.78	23.14	43.50	-20.36
197.25	Max-Peak	H	200	243	-54.01	-17.49	35.49	43.50	-8.01
332.66	Max-Peak	H	100	155	-61.98	-14.27	30.75	46.00	-15.25
727.82	Max-Peak	H	100	20	-69.44	-6.68	30.88	46.00	-15.12

Table 7-37. Radiated Spurious Emissions Below 1GHz (NB UNII HDRp4 – 5844MHz), with AC/DC adaptor

FCC ID: BCG-A3440	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/11/2026 - 8/12/2026	EUT Type: Wireless Left Earbud	Approved by: Technical Manager
Test Report S/N: 1C2606090047-04-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 93 of 105

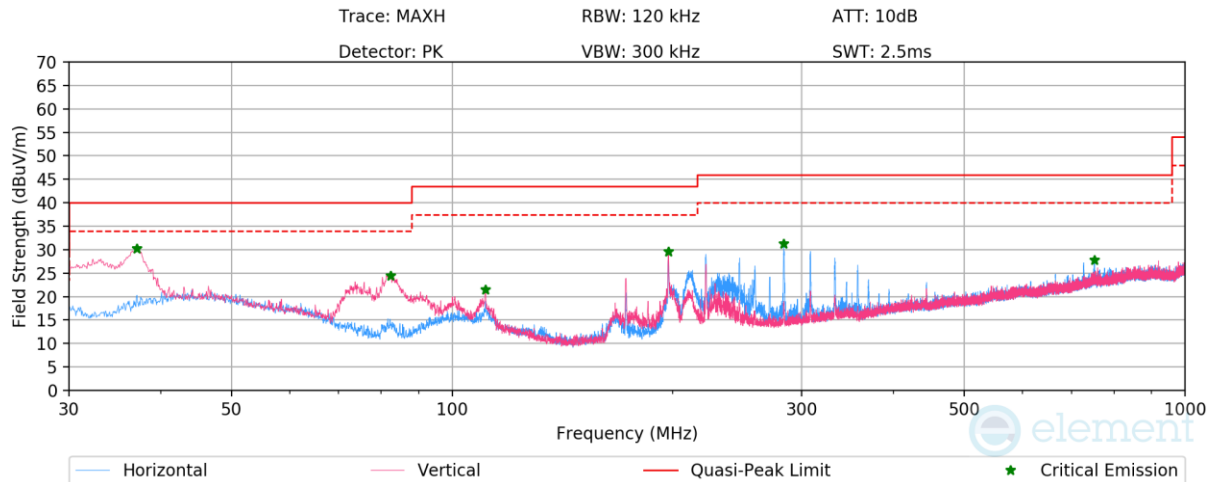

Plot 7-92. Radiated Spurious Emissions Below 1GHz (NB UNII LE1M – 5844MHz), with AC/DC adaptor

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
37.14	Max-Peak	V	100	360	-57.84	-18.88	30.29	40.00	-9.71
82.44	Max-Peak	V	100	136	-59.67	-22.91	24.42	40.00	-15.58
111.00	Max-Peak	V	100	73	-66.72	-18.83	21.45	43.50	-22.05
197.29	Max-Peak	V	100	329	-60.06	-17.34	29.60	43.50	-13.90
283.51	Max-Peak	H	100	262	-60.25	-15.47	31.28	46.00	-14.72
752.31	Max-Peak	H	100	175	-73.52	-5.72	27.76	46.00	-18.24

Table 7-38. Radiated Spurious Emissions Below 1GHz (NB UNII LE1M – 5844MHz), with AC/DC adaptor

FCC ID: BCG-A3440	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/11/2026 - 8/12/2026	EUT Type: Wireless Left Earbud	Approved by: Technical Manager
Test Report S/N: 1C2606090047-04-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 94 of 105

7.8 AC Line Conducted Emissions

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for AC Line conducted spurious emissions. All data rates and modes were investigated for AC Line conducted spurious emissions.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207.

Frequency of emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-39. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024, Subclause 6.2

Test Settings

Quasi-Peak Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: BCG-A3440	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/11/2026 - 8/12/2026	EUT Type: Wireless Left Earbud	Approved by: Technical Manager
Test Report S/N: 1C2606090047-04-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 95 of 105

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


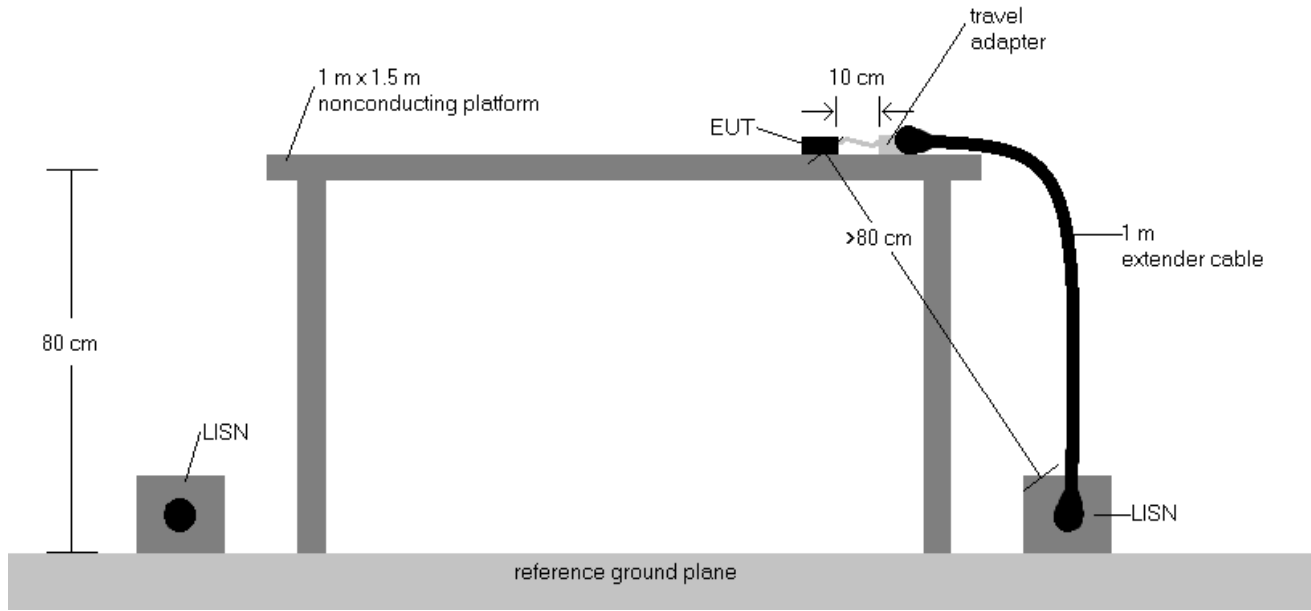


Figure 7-8. Test Instrument & Measurement Setup

Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported. The emissions found were not affected by the choice of channel used during testing.
2. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT charged by charging case and powered by AC/DC adaptor with USB-C cable
 - b. EUT charged by charging case and powered by host PC with USB-C cable
3. The limit for an intentional radiator from 150kHz to 30MHz are specified in 15.207.
4. $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
5. $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Correction Factor (dB)}$
6. $\text{Margin (dB)} = \text{QP/AV Level (dB}\mu\text{V)} - \text{QP/AV Limit (dB}\mu\text{V)}$
7. Traces shown in plots are made using quasi-peak and average detectors.
8. Deviations to the Specifications: None.

FCC ID: BCG-A3440	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/11/2026 - 8/12/2026	EUT Type: Wireless Left Earbud	Approved by: Technical Manager
Test Report S/N: 1C2606090047-04-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 96 of 105

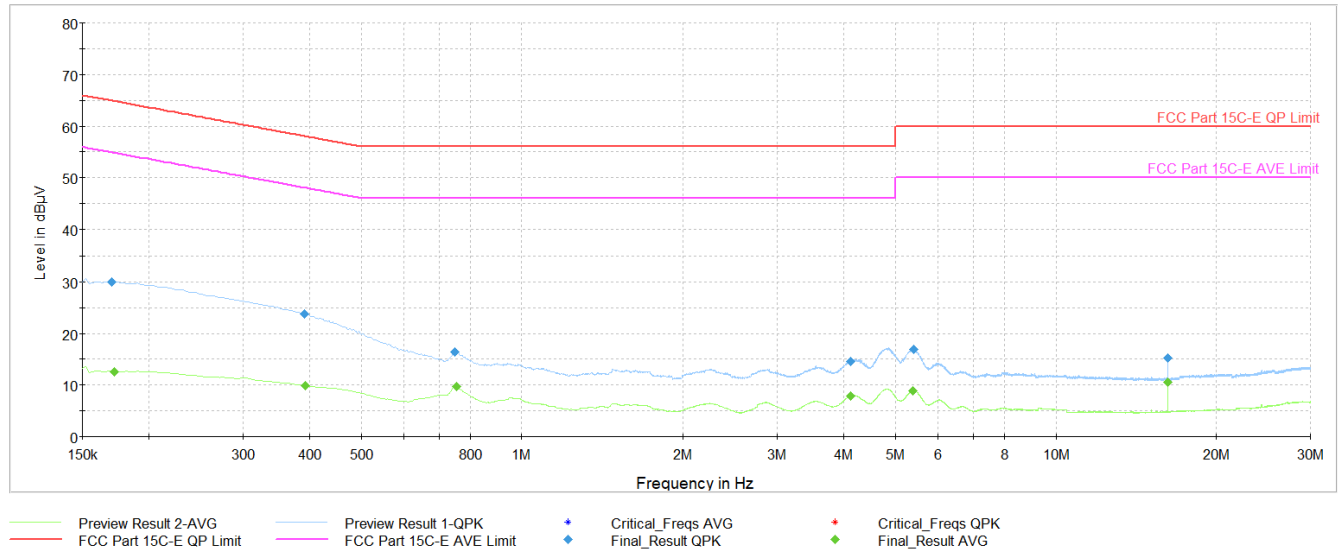


Plot 7-93. AC Line Conducted Plot (NB UNII BDR – 5844MHz) (L1) with AC/DC adaptor

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.170	FINAL	30.0	—	64.95	-34.94	L1	GND
0.173	FINAL	—	12.56	54.84	-42.28	L1	GND
0.391	FINAL	23.7	—	58.05	-34.31	L1	GND
0.393	FINAL	—	9.90	48.00	-38.10	L1	GND
0.749	FINAL	16.4	—	56.00	-39.62	L1	GND
0.755	FINAL	—	9.63	46.00	-36.37	L1	GND
4.115	FINAL	14.5	—	56.00	-41.51	L1	GND
4.115	FINAL	—	7.79	46.00	-38.21	L1	GND
5.399	FINAL	—	8.90	50.00	-41.10	L1	GND
5.404	FINAL	16.8	—	60.00	-43.18	L1	GND
16.199	FINAL	—	10.48	50.00	-39.52	L1	GND
16.202	FINAL	15.2	—	60.00	-44.81	L1	GND

Table 7-40. AC Line Conducted Data (NB UNII BDR – 5844MHz) (L1) with AC/DC adaptor

FCC ID: BCG-A3440	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/11/2026 - 8/12/2026	EUT Type: Wireless Left Earbud	Approved by: Technical Manager
Test Report S/N: 1C2606090047-04-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 97 of 105

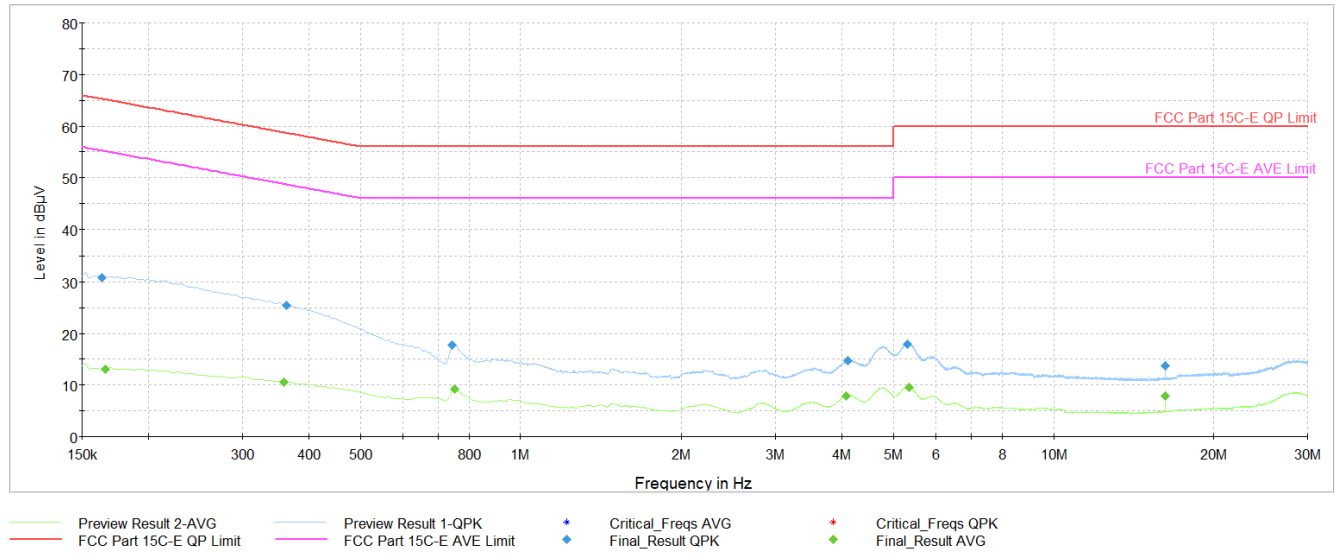


Plot 7-94. AC Line Conducted Plot (NB UNII BDR – 5844MHz) (N) with AC/DC adaptor

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.164	FINAL	30.8	—	65.28	-34.51	N	GND
0.166	FINAL	—	13.13	55.17	-42.04	N	GND
0.359	FINAL	—	10.58	48.75	-38.17	N	GND
0.364	FINAL	25.5	—	58.64	-33.19	N	GND
0.744	FINAL	17.7	—	56.00	-38.26	N	GND
0.753	FINAL	—	9.12	46.00	-36.88	N	GND
4.079	FINAL	—	7.84	46.00	-38.16	N	GND
4.110	FINAL	14.8	—	56.00	-41.22	N	GND
5.309	FINAL	17.9	—	60.00	-42.08	N	GND
5.354	FINAL	—	9.60	50.00	-40.40	N	GND
16.204	FINAL	—	7.91	50.00	-42.09	N	GND
16.204	FINAL	13.7	—	60.00	-46.31	N	GND

Table 7-41. AC Line Conducted (NB UNII BDR – 5844MHz) (N) with AC/DC adaptor

FCC ID: BCG-A3440	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/11/2026 - 8/12/2026	EUT Type: Wireless Left Earbud	Approved by: Technical Manager
Test Report S/N: 1C2606090047-04-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 98 of 105

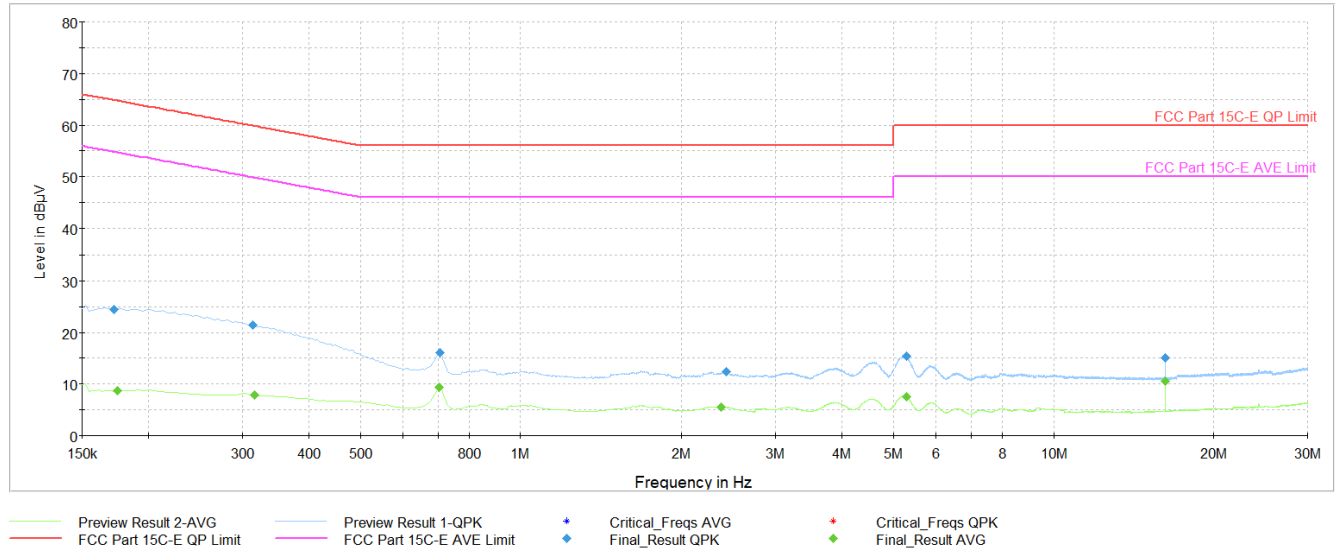


Plot 7-95. AC Line Conducted Plot (NB UNII HDR4 – 5844MHz) (L1) with AC/DC adaptor

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.173	FINAL	24.5	—	64.84	-40.38	L1	GND
0.175	FINAL	—	8.66	54.73	-46.07	L1	GND
0.314	FINAL	21.5	—	59.86	-38.38	L1	GND
0.317	FINAL	—	7.79	49.80	-42.01	L1	GND
0.704	FINAL	—	9.40	46.00	-36.60	L1	GND
0.706	FINAL	16.1	—	56.00	-39.93	L1	GND
2.369	FINAL	—	5.51	46.00	-40.49	L1	GND
2.427	FINAL	12.3	—	56.00	-43.66	L1	GND
5.287	FINAL	—	7.50	50.00	-42.50	L1	GND
5.291	FINAL	15.3	—	60.00	-44.69	L1	GND
16.197	FINAL	—	10.50	50.00	-39.50	L1	GND
16.199	FINAL	15.1	—	60.00	-44.94	L1	GND

Table 7-42. AC Line Conducted Data (NB UNII HDR4 – 5844MHz) (L1) with AC/DC adaptor


FCC ID: BCG-A3440	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/11/2026 - 8/12/2026	EUT Type: Wireless Left Earbud	Approved by: Technical Manager
Test Report S/N: 1C2606090047-04-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 99 of 105

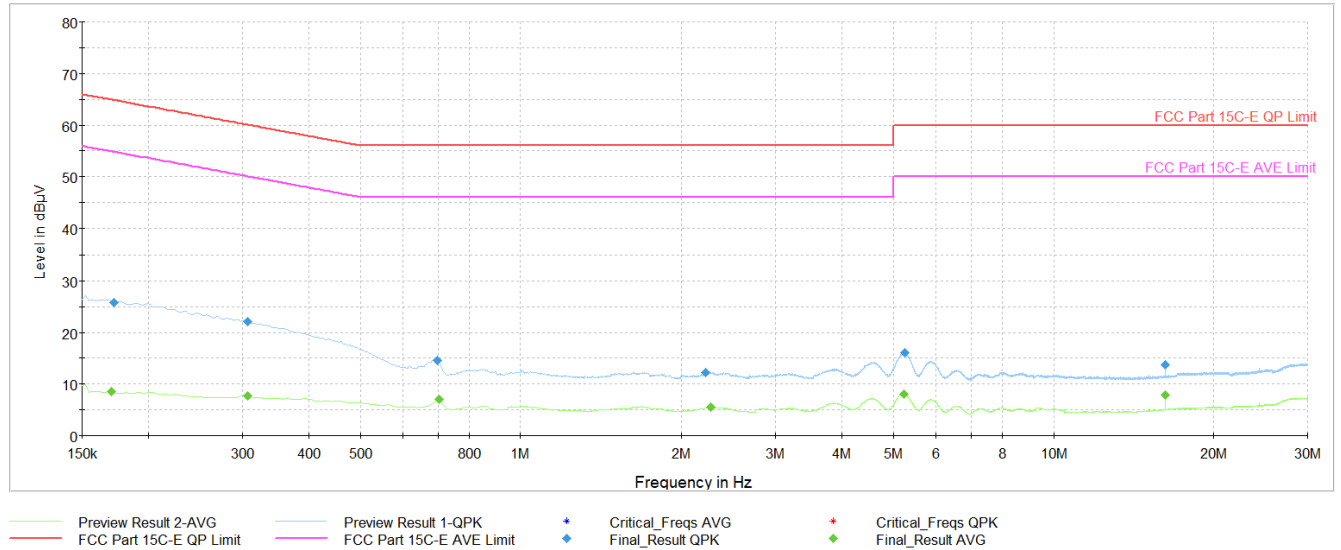

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.170	FINAL	—	8.47	54.95	-46.47	N	GND
0.173	FINAL	25.8	—	64.84	-39.07	N	GND
0.308	FINAL	—	7.62	50.04	-42.42	N	GND
0.308	FINAL	22.1	—	60.04	-37.94	N	GND
0.699	FINAL	14.5	—	56.00	-41.52	N	GND
0.704	FINAL	—	6.99	46.00	-39.01	N	GND
2.216	FINAL	12.2	—	56.00	-43.82	N	GND
2.267	FINAL	—	5.45	46.00	-40.55	N	GND
5.240	FINAL	—	8.09	50.00	-41.91	N	GND
5.244	FINAL	16.0	—	60.00	-43.96	N	GND
16.206	FINAL	—	7.92	50.00	-42.08	N	GND
16.206	FINAL	13.7	—	60.00	-46.28	N	GND

Table 7-43. AC Line Conducted (NB UNII HDR4 – 5844MHz) (N) with AC/DC adaptor

FCC ID: BCG-A3440	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/11/2026 - 8/12/2026	EUT Type: Wireless Left Earbud	Approved by: Technical Manager
Test Report S/N: 1C2606090047-04-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 100 of 105

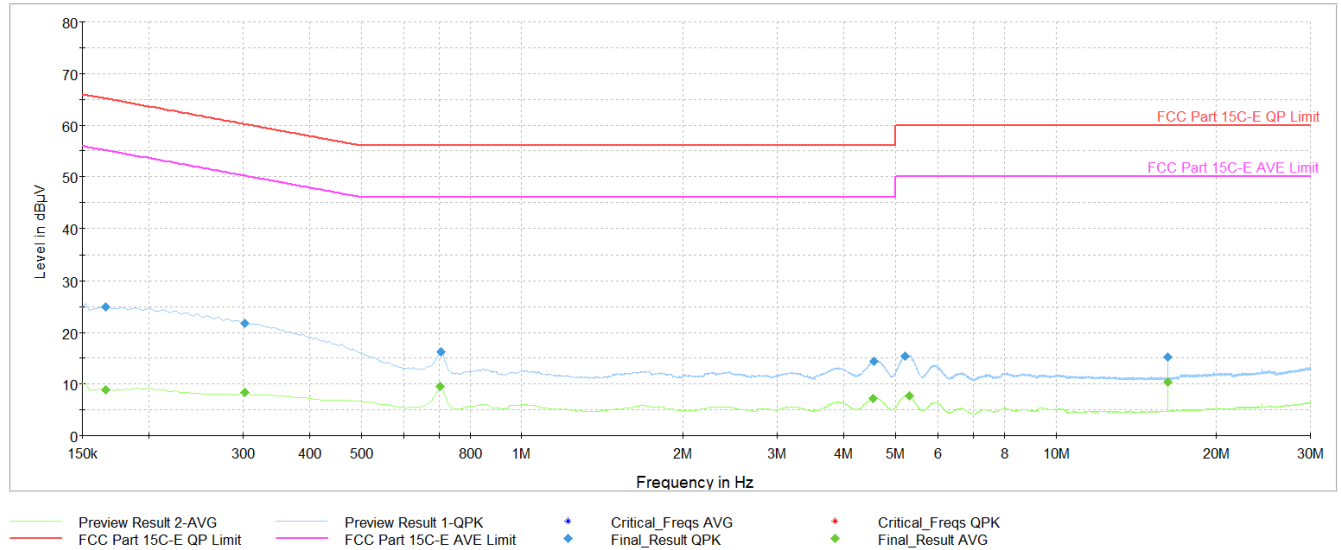


Plot 7-97. AC Line Conducted Plot (NB UNII HDRp4 – 5844MHz) (L1) with AC/DC adaptor

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.166	FINAL	—	8.82	55.17	-46.35	L1	GND
0.166	FINAL	24.9	—	65.17	-40.32	L1	GND
0.303	FINAL	—	8.39	50.16	-41.77	L1	GND
0.303	FINAL	21.8	—	60.16	-38.37	L1	GND
0.704	FINAL	—	9.58	46.00	-36.42	L1	GND
0.706	FINAL	16.3	—	56.00	-39.71	L1	GND
4.544	FINAL	—	7.17	46.00	-38.83	L1	GND
4.565	FINAL	14.4	—	56.00	-41.61	L1	GND
5.217	FINAL	15.5	—	60.00	-44.52	L1	GND
5.309	FINAL	—	7.69	50.00	-42.31	L1	GND
16.215	FINAL	—	10.42	50.00	-39.58	L1	GND
16.217	FINAL	15.2	—	60.00	-44.76	L1	GND

Table 7-44. AC Line Conducted Data (NB UNII HDRp4 – 5844MHz) (L1) with AC/DC adaptor

FCC ID: BCG-A3440	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/11/2026 - 8/12/2026	EUT Type: Wireless Left Earbud	Approved by: Technical Manager
Test Report S/N: 1C2606090047-04-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 101 of 105

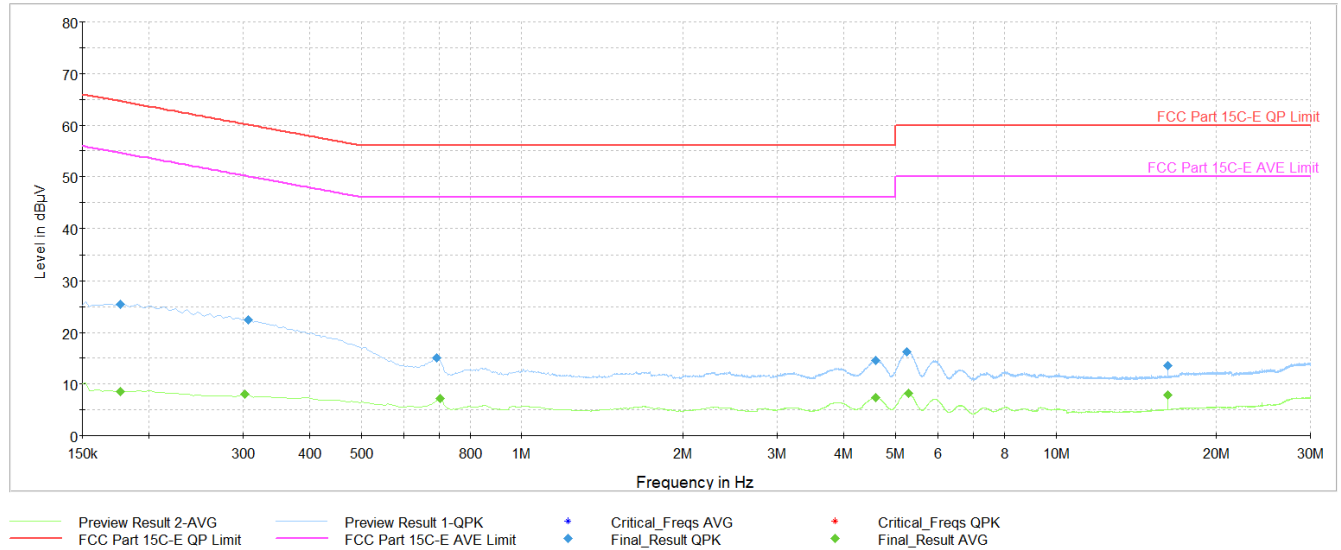


Plot 7-98. AC Line Conducted Plot (NB UNII HDRp4 – 5844MHz) (N) with AC/DC adaptor

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.177	FINAL	—	8.57	54.63	-46.06	N	GND
0.177	FINAL	25.5	—	64.63	-39.15	N	GND
0.303	FINAL	—	7.97	50.16	-42.19	N	GND
0.308	FINAL	22.4	—	60.04	-37.61	N	GND
0.692	FINAL	15.1	—	56.00	-40.87	N	GND
0.704	FINAL	—	7.17	46.00	-38.83	N	GND
4.589	FINAL	—	7.37	46.00	-38.63	N	GND
4.598	FINAL	14.5	—	56.00	-41.46	N	GND
5.262	FINAL	16.3	—	60.00	-43.73	N	GND
5.294	FINAL	—	8.25	50.00	-41.75	N	GND
16.224	FINAL	—	7.81	50.00	-42.19	N	GND
16.224	FINAL	13.6	—	60.00	-46.41	N	GND

Table 7-45. AC Line Conducted (NB UNII HDRp4 – 5844MHz) (N) with AC/DC adaptor

FCC ID: BCG-A3440	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/11/2026 - 8/12/2026	EUT Type: Wireless Left Earbud	Approved by: Technical Manager
Test Report S/N: 1C2606090047-04-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 102 of 105

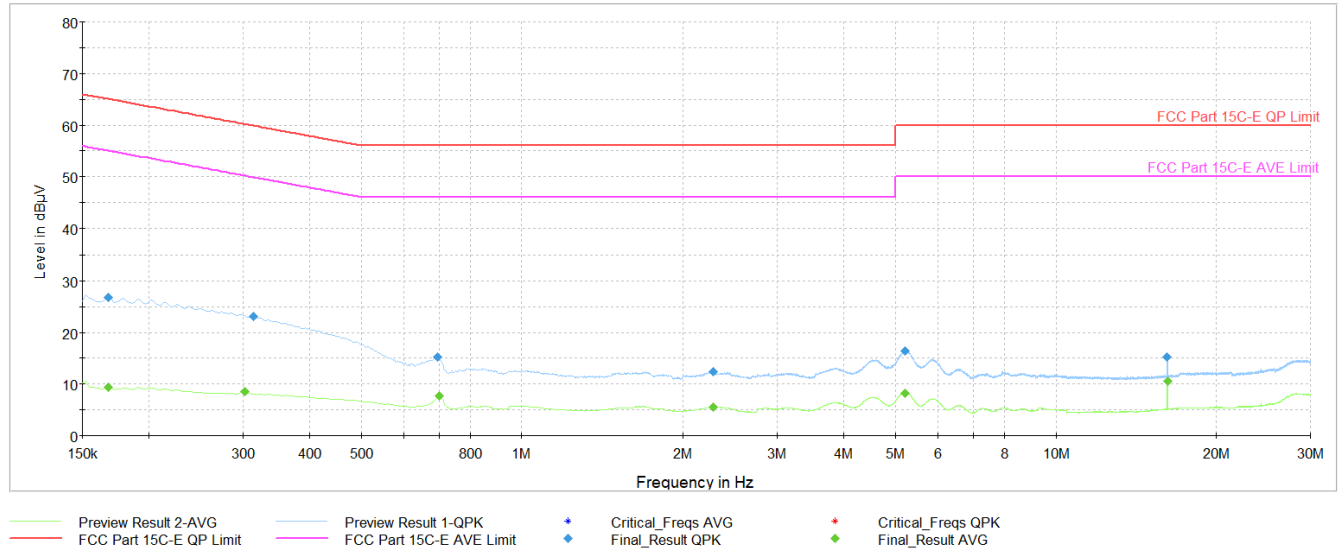


Plot 7-99. AC Line Conducted Plot (NB UNII LE1M – 5844MHz) (L1) with AC/DC adaptor

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.168	FINAL	—	9.36	55.06	-45.70	L1	GND
0.168	FINAL	26.8	—	65.06	-38.25	L1	GND
0.303	FINAL	—	8.46	50.16	-41.70	L1	GND
0.314	FINAL	23.0	—	59.86	-36.83	L1	GND
0.695	FINAL	15.2	—	56.00	-40.82	L1	GND
0.701	FINAL	—	7.64	46.00	-38.36	L1	GND
2.279	FINAL	12.3	—	56.00	-43.69	L1	GND
2.279	FINAL	—	5.59	46.00	-40.41	L1	GND
5.217	FINAL	16.4	—	60.00	-43.56	L1	GND
5.217	FINAL	—	8.28	50.00	-41.72	L1	GND
16.177	FINAL	15.3	—	60.00	-44.69	L1	GND
16.179	FINAL	—	10.56	50.00	-39.44	L1	GND

Table 7-46. AC Line Conducted Data (NB UNII LE1M – 5844MHz) (L1) with AC/DC adaptor

FCC ID: BCG-A3440	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/11/2026 - 8/12/2026	EUT Type: Wireless Left Earbud	Approved by: Technical Manager
Test Report S/N: 1C2606090047-04-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 103 of 105

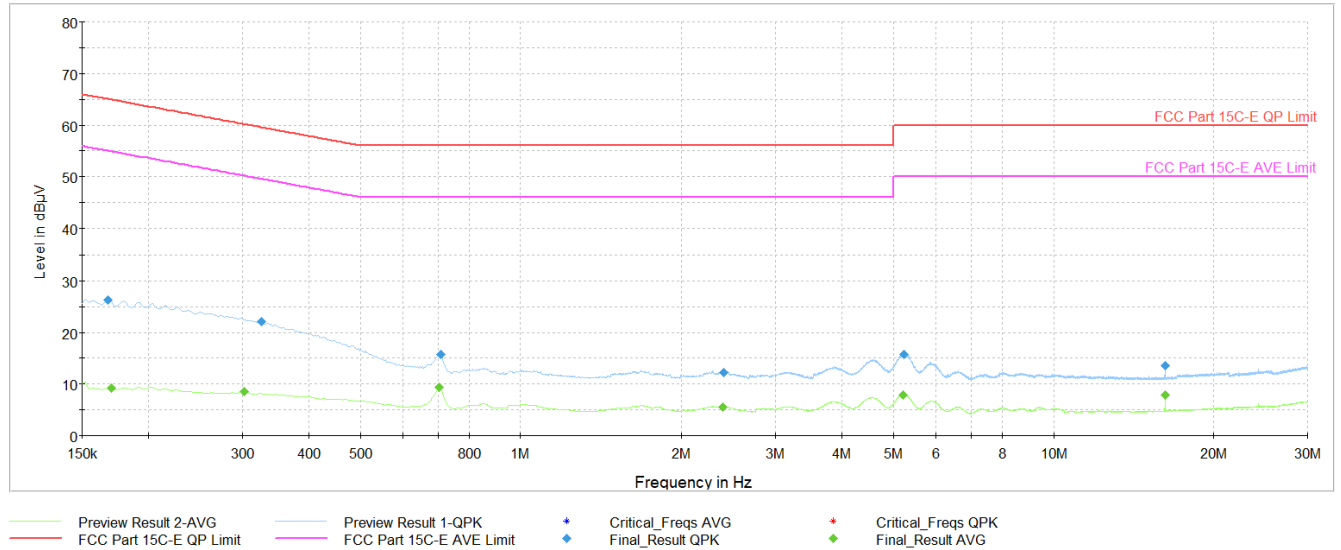

Plot 7-100. AC Line Conducted Plot (NB UNII LE1M – 5844MHz) (N) with AC/DC adaptor

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.168	FINAL	26.3	—	65.06	-38.77	N	GND
0.170	FINAL	—	9.20	54.95	-45.75	N	GND
0.303	FINAL	—	8.52	50.16	-41.64	N	GND
0.326	FINAL	22.0	—	59.57	-37.55	N	GND
0.704	FINAL	—	9.29	46.00	-36.71	N	GND
0.708	FINAL	15.7	—	56.00	-40.29	N	GND
2.389	FINAL	—	5.55	46.00	-40.45	N	GND
2.402	FINAL	12.1	—	56.00	-43.86	N	GND
5.217	FINAL	—	7.91	50.00	-42.09	N	GND
5.240	FINAL	15.8	—	60.00	-44.25	N	GND
16.184	FINAL	—	7.85	50.00	-42.15	N	GND
16.184	FINAL	13.6	—	60.00	-46.38	N	GND

Table 7-47. AC Line Conducted (NB UNII LE1M – 5844MHz) (N) with AC/DC adaptor

FCC ID: BCG-A3440	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/11/2026 - 8/12/2026	EUT Type: Wireless Left Earbud	Approved by: Technical Manager
Test Report S/N: 1C2606090047-04-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 104 of 105

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Apple Wireless Left Earbud FCC ID: BCG-A3440** is in compliance with Part 15 Subpart E (15.407) of the FCC Rules.

FCC ID: BCG-A3440	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/11/2026 - 8/12/2026	EUT Type: Wireless Left Earbud	Approved by: Technical Manager
Test Report S/N: 1C2606090047-04-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 105 of 105