


LE (UNII 3)

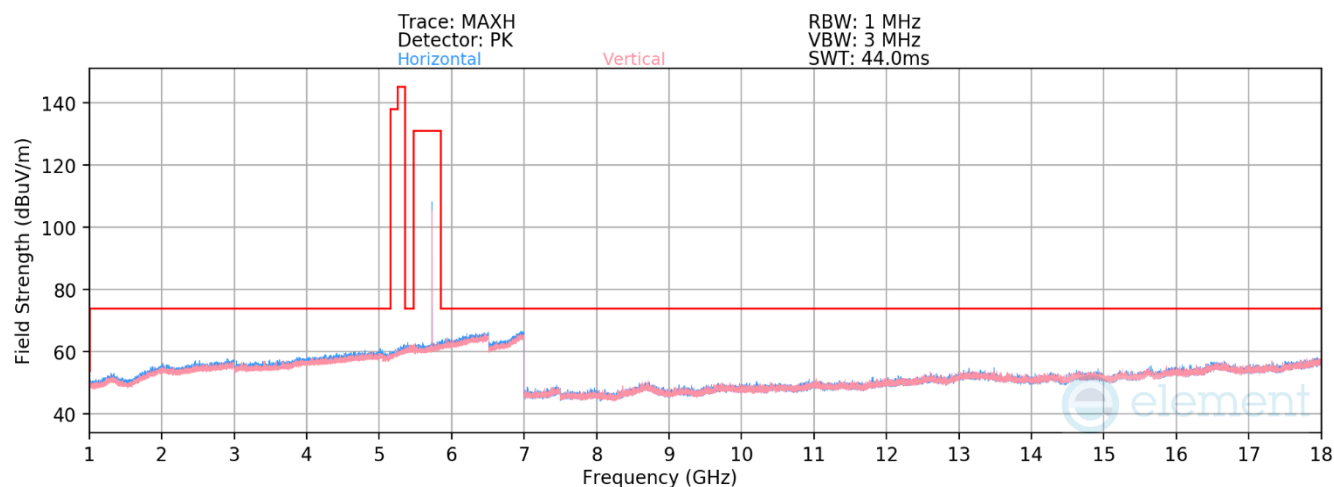

Plot 7-56. Radiated Spurious Emissions 1-18GHz (LE1M- 5733MHz)


Mode: LE
Data Rate: 1Mbps
Distance of Measurements: 3 Meters
Operating Frequency: 5733MHz

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	11462.00	Average	-	-	-	-78.76	9.86	38.10	53.98	-15.88
*	11462.00	Peak	-	-	-	-68.04	9.86	48.82	73.98	-25.16
	17193.00	Peak	-	-	-	-69.74	19.37	56.63	68.20	-11.57


Table 7-24. Radiated Spurious Emissions Measurements

FCC ID: BCG-A3454		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2512110102-06-R3.BCG	Test Dates: 12/11/2025 - 02/19/2026	EUT Type: Wireless Headphones	Page 65 of 87

V 11.0 06/2025

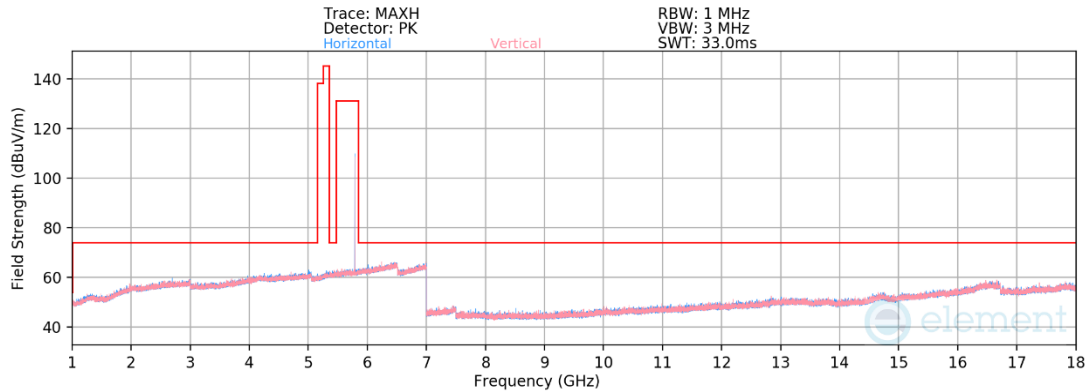

Plot 7-57. Radiated Spurious Emissions 1-18GHz (LE1M- 5788MHz)

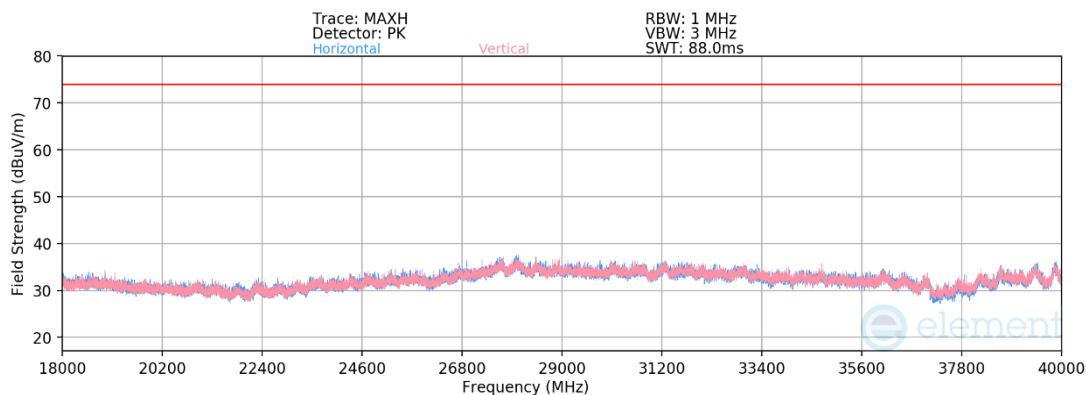

Plot 7-58. Radiated Spurious Emissions Above 18GHz (LE1M- 5788MHz)

Mode: LE

Data Rate: 1Mbps

Distance of Measurements: 3 Meters


Operating Frequency: 5788MHz

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Duty Cycle Correction [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11576.00	Average	-	-	-	-79.14	9.90	0.00	0.00	37.76	53.98	-16.22
* 11576.00	Peak	-	-	-	-68.09	9.90	0.00	0.00	48.81	73.98	-25.17
17364.00	Peak	-	-	-	-69.70	18.90	0.00	0.00	56.20	68.20	-12.00
23152.00	Peak	H	150	156	-61.47	-6.22	-9.54	0.00	39.31	68.20	-28.89
28940.00	Peak	H	150	207	-60.17	-3.42	-9.54	0.00	43.41	68.20	-24.79
34728.00	Peak	H	150	217	-61.57	-5.00	-9.54	0.00	40.43	68.20	-27.77

Table 7-25. Radiated Spurious Emissions Measurements

FCC ID: BCG-A3454		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2512110102-06-R3.BCG	Test Dates: 12/11/2025 - 02/19/2026	EUT Type: Wireless Headphones		Page 66 of 87

V 11.0 06/2025

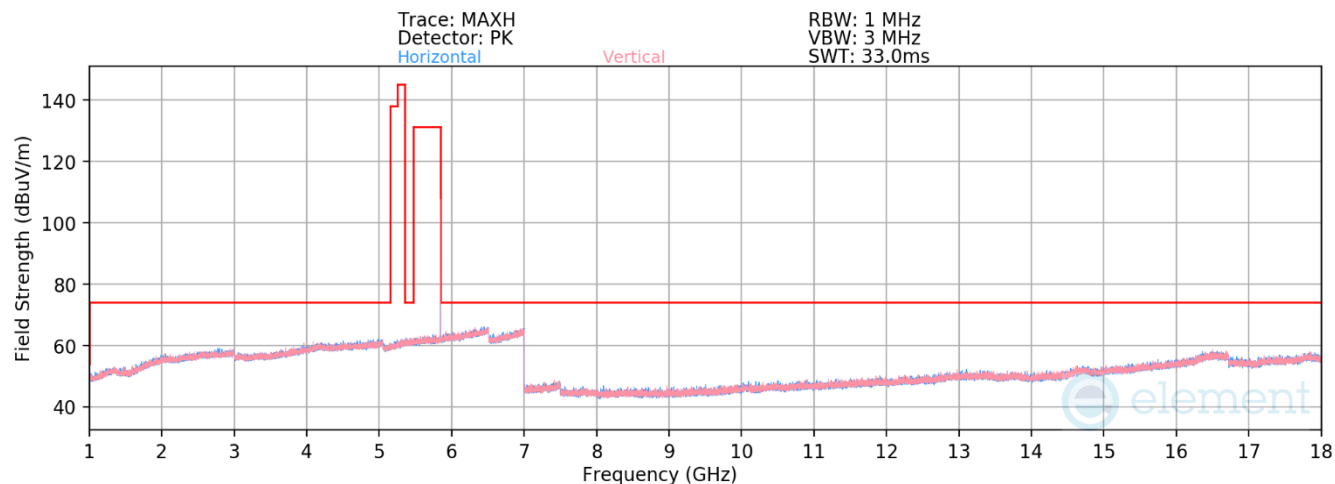

Plot 7-59. Radiated Spurious Emissions 1-18GHz (LE1M- 5844MHz)

Mode: LE

Data Rate: 1Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 5844MHz

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	11688.00	Average	-	-	-	-79.31	10.28	37.97	53.98	-16.01
*	11688.00	Peak	-	-	-	-68.02	10.28	49.26	73.98	-24.72
	17532.00	Peak	V	263	189	-69.05	19.31	57.26	68.20	-10.94


Table 7-26. Radiated Spurious Emissions Measurements

FCC ID: BCG-A3454		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2512110102-06-R3.BCG	Test Dates: 12/11/2025 - 02/19/2026	EUT Type: Wireless Headphones	Page 67 of 87

V 11.0 06/2025


7.6.2 Radiated Band Edge Measurements (U-NII-1)

Mode: BDR
 Measurement Distance: 3 Meters
 Operating Frequency: 5157MHz

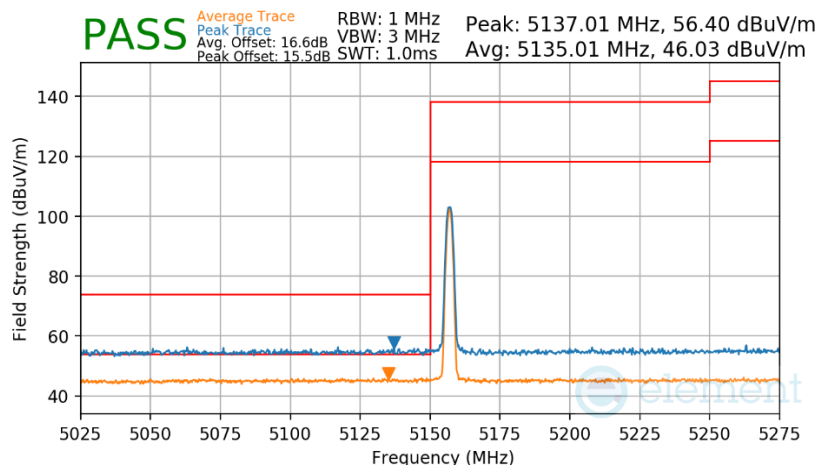

Plot 7-60. Radiated Lower Band Edge Measurement

Mode: LE1M
 Measurement Distance: 3 Meters
 Operating Frequency: 5157MHz

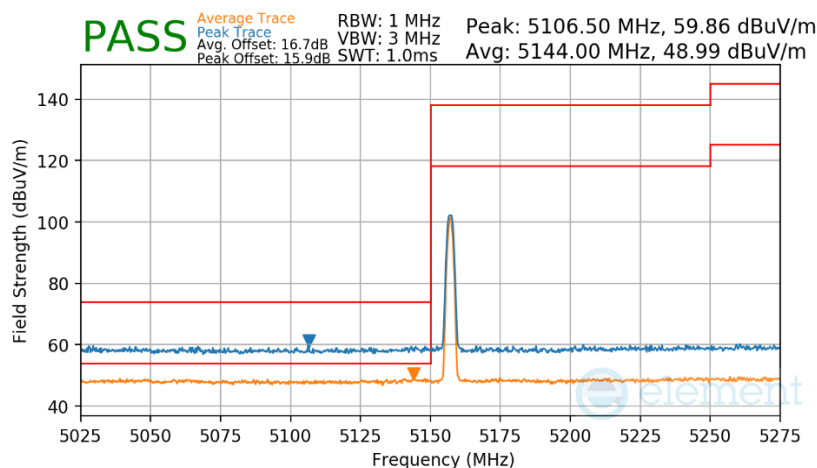


Plot 7-61. Radiated Lower Band Edge Measurement

FCC ID: BCG-A3454		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2512110102-06-R3.BCG	Test Dates: 12/11/2025 - 02/19/2026	EUT Type: Wireless Headphones	Page 68 of 87


V 11.0 06/2025

Mode: LE2M
Measurement Distance: 3 Meters
Operating Frequency: 5157MHz

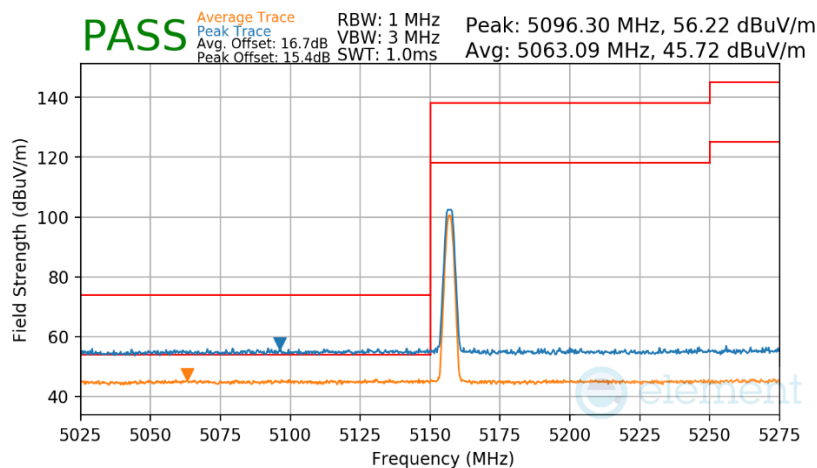

Plot 7-62. Radiated Lower Band Edge Measurement

Mode: HDR4
Measurement Distance: 3 Meters
Operating Frequency: 5157MHz

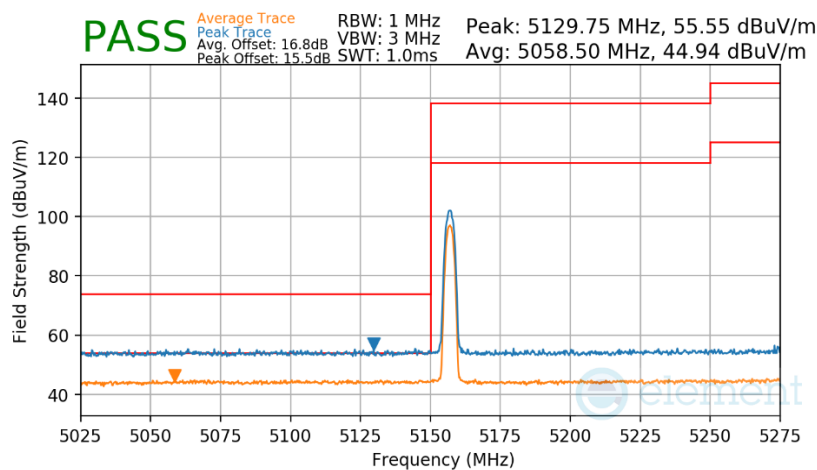


Plot 7-63. Radiated Lower Band Edge Measurement

FCC ID: BCG-A3454		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2512110102-06-R3.BCG	Test Dates: 12/11/2025 - 02/19/2026	EUT Type: Wireless Headphones	Page 69 of 87


V 11.0 06/2025

Mode: HDR8
Measurement Distance: 3 Meters
Operating Frequency: 5157MHz

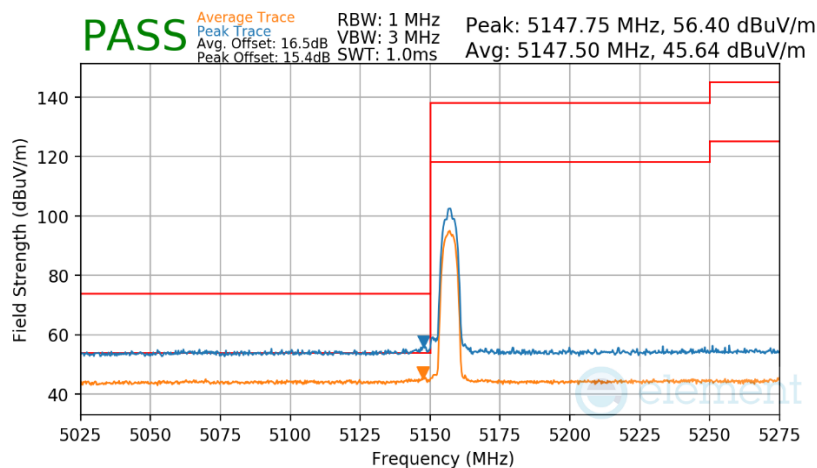

Plot 7-64. Radiated Lower Band Edge Measurement

Mode: HDRp4
Measurement Distance: 3 Meters
Operating Frequency: 5157MHz

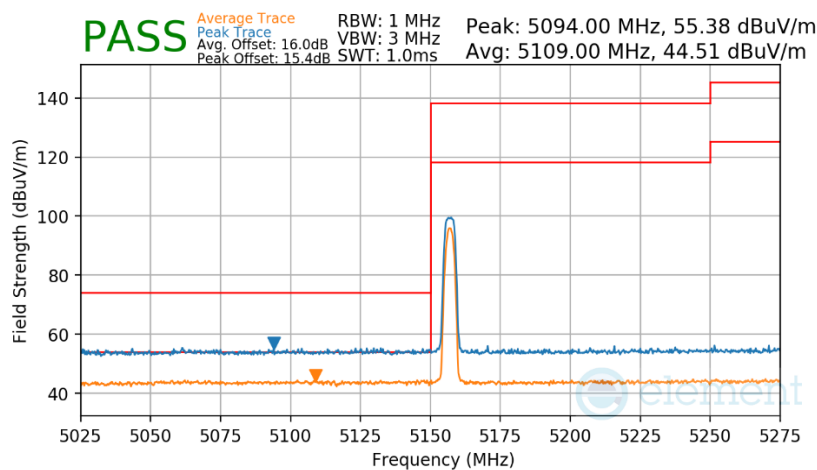


Plot 7-65. Radiated Lower Band Edge Measurement

FCC ID: BCG-A3454		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2512110102-06-R3.BCG	Test Dates: 12/11/2025 - 02/19/2026	EUT Type: Wireless Headphones	Page 70 of 87

V 11.0 06/2025

Mode: HDRp8
 Measurement Distance: 3 Meters
 Operating Frequency: 5157MHz

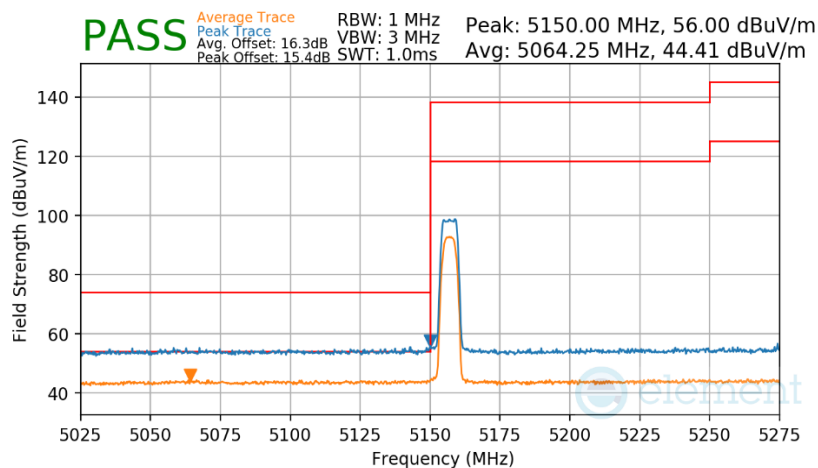


Plot 7-66. Radiated Lower Band Edge Measurement

FCC ID: BCG-A3454		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2512110102-06-R3.BCG	Test Dates: 12/11/2025 - 02/19/2026	EUT Type: Wireless Headphones	Page 71 of 87

V 11.0 06/2025


7.6.3 Radiated Band Edge Measurements (U-NII-3)

Mode: BDR
 Measurement Distance: 3 Meters
 Operating Frequency: 5731MHz

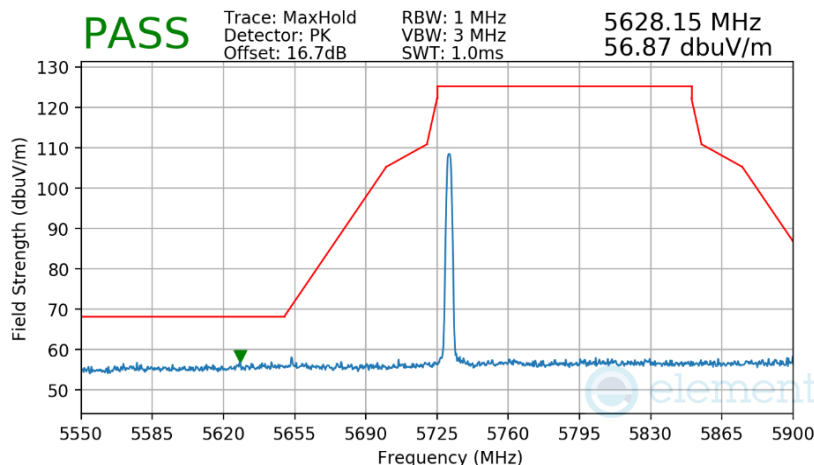

Plot 7-67. Radiated Lower Band Edge Measurement

Mode: LE1M
 Measurement Distance: 3 Meters
 Operating Frequency: 5731MHz

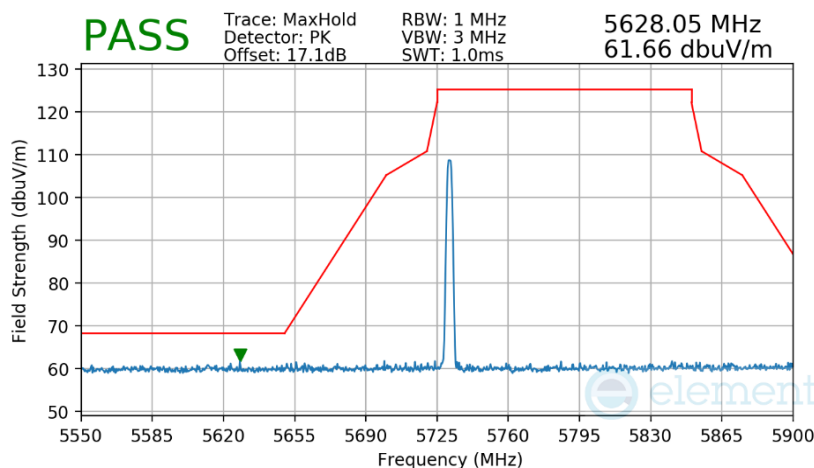


Plot 7-68. Radiated Lower Band Edge Measurement

FCC ID: BCG-A3454		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2512110102-06-R3.BCG	Test Dates: 12/11/2025 - 02/19/2026	EUT Type: Wireless Headphones	Page 72 of 87


V 11.0 06/2025

Mode: LE2M
 Measurement Distance: 3 Meters
 Operating Frequency: 5731MHz

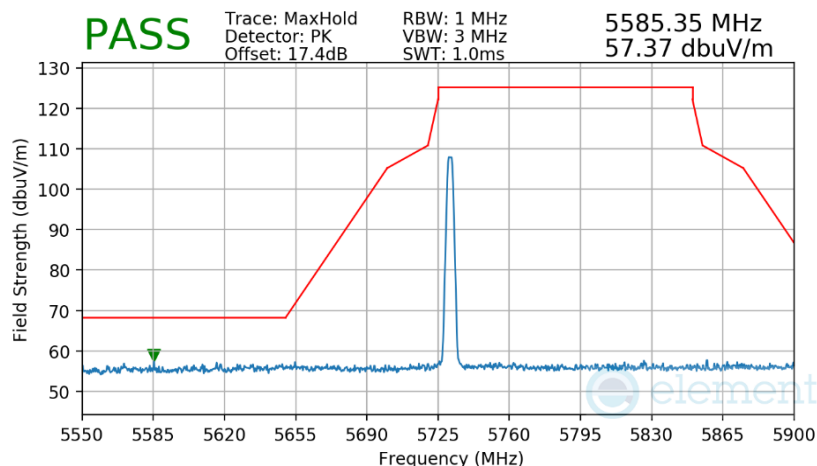

Plot 7-69. Radiated Lower Band Edge Measurement

Mode: HDR4
 Measurement Distance: 3 Meters
 Operating Frequency: 5731MHz

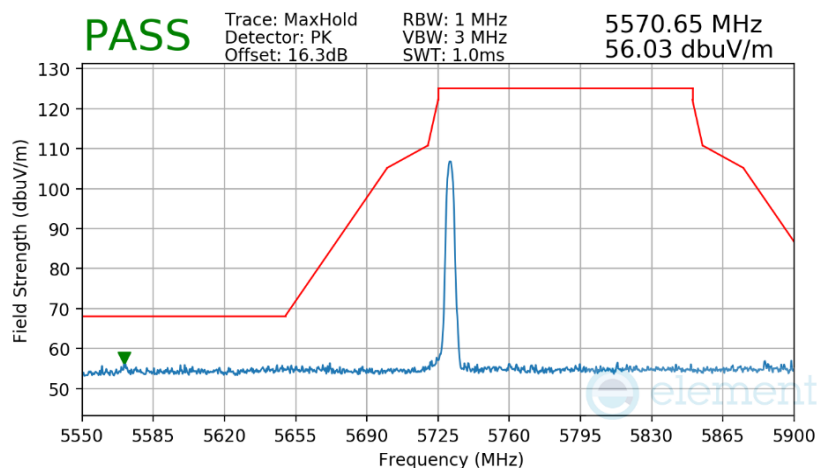


Plot 7-70. Radiated Lower Band Edge Measurement

FCC ID: BCG-A3454		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2512110102-06-R3.BCG	Test Dates: 12/11/2025 - 02/19/2026	EUT Type: Wireless Headphones	Page 73 of 87


V 11.0 06/2025

Mode: HDR8
 Measurement Distance: 3 Meters
 Operating Frequency: 5731MHz

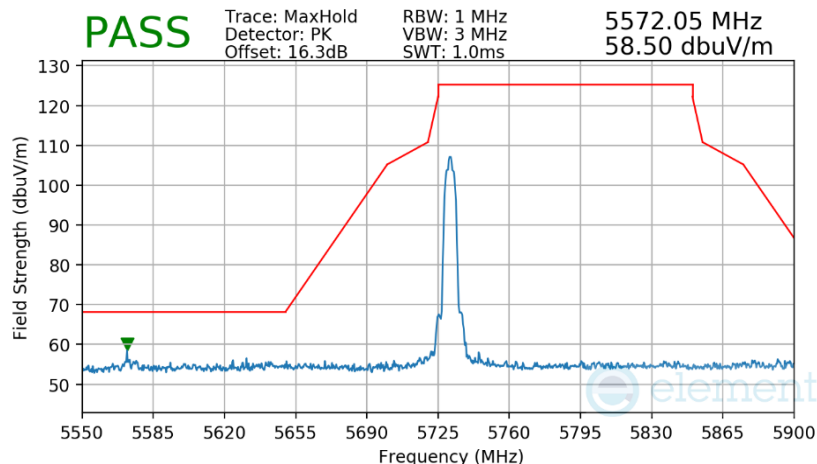

Plot 7-71. Radiated Lower Band Edge Measurement

Mode: HDRp4
 Measurement Distance: 3 Meters
 Operating Frequency: 5731MHz

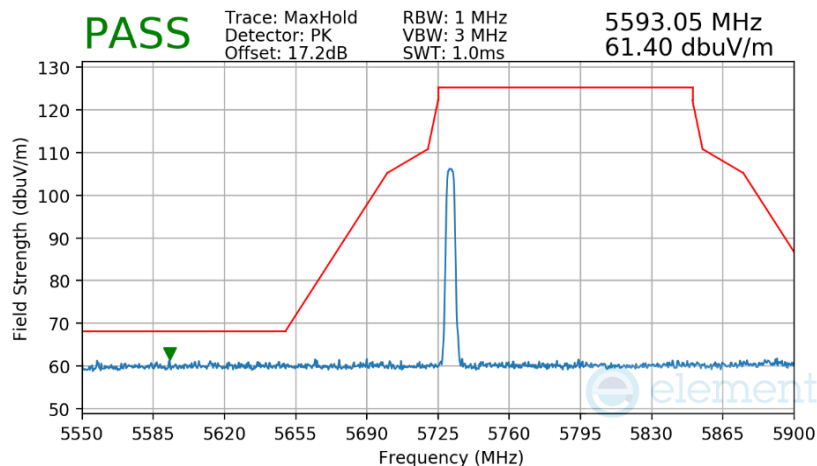


Plot 7-72. Radiated Lower Band Edge Measurement

FCC ID: BCG-A3454		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2512110102-06-R3.BCG	Test Dates: 12/11/2025 - 02/19/2026	EUT Type: Wireless Headphones	Page 74 of 87


V 11.0 06/2025

Mode: HDRp8
Measurement Distance: 3 Meters
Operating Frequency: 5844MHz

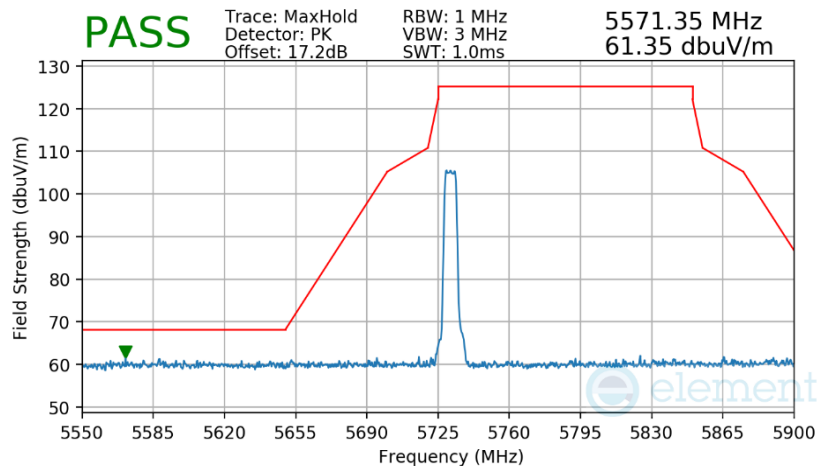

Plot 7-73. Radiated Lower Band Edge Measurement

Mode: BDR
Measurement Distance: 3 Meters
Operating Frequency: 5844MHz

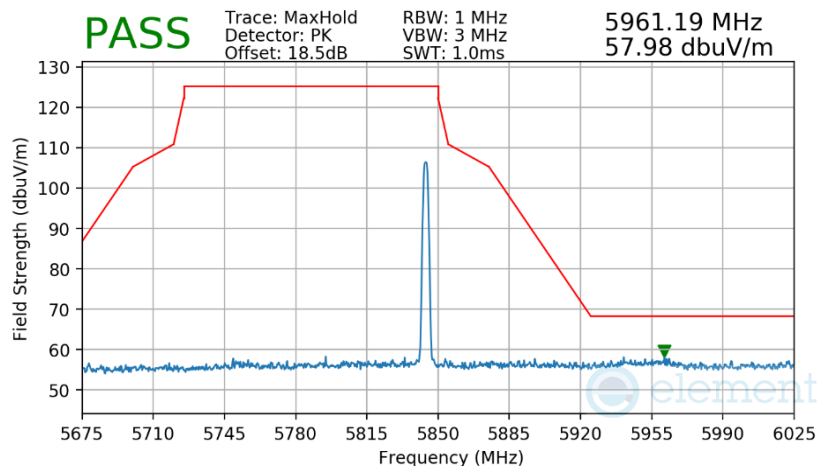


Plot 7-74. Radiated Upper Band Edge Measurement

FCC ID: BCG-A3454		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2512110102-06-R3.BCG	Test Dates: 12/11/2025 - 02/19/2026	EUT Type: Wireless Headphones	Page 75 of 87


V 11.0 06/2025

Mode: LE1M
Measurement Distance: 3 Meters
Operating Frequency: 5844MHz

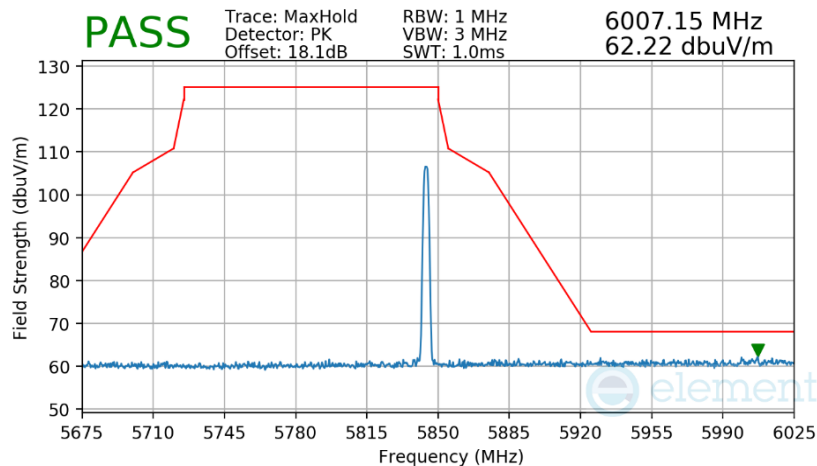

Plot 7-75. Radiated Upper Band Edge Measurement

Mode: LE2M
Measurement Distance: 3 Meters
Operating Frequency: 5844MHz

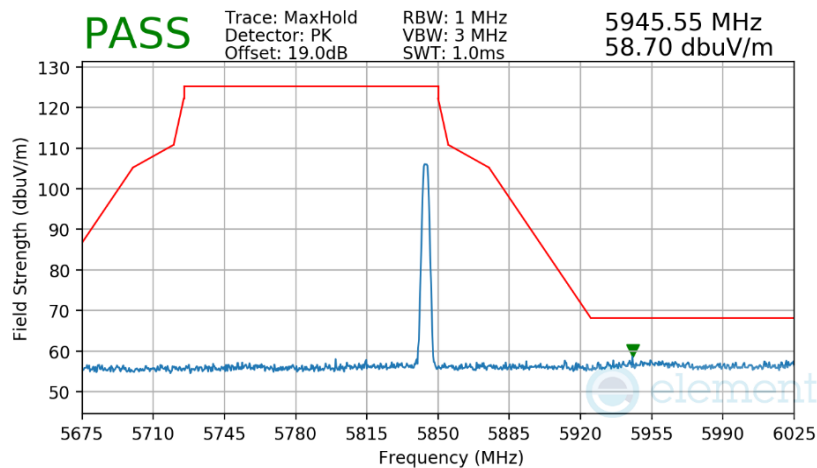


Plot 7-76. Radiated Upper Band Edge Measurement

FCC ID: BCG-A3454		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2512110102-06-R3.BCG	Test Dates: 12/11/2025 - 02/19/2026	EUT Type: Wireless Headphones	Page 76 of 87


V 11.0 06/2025

Mode: HDR4
Measurement Distance: 3 Meters
Operating Frequency: 5844MHz

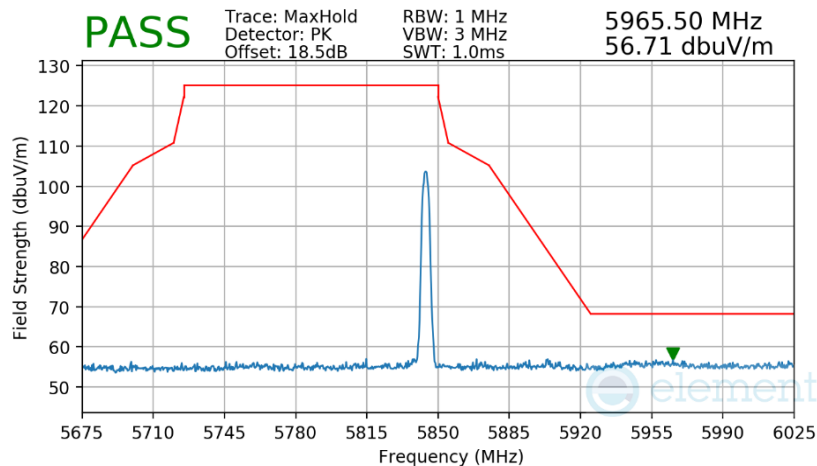

Plot 7-77. Radiated Upper Band Edge Measurement

Mode: HDR8
Measurement Distance: 3 Meters
Operating Frequency: 5844MHz

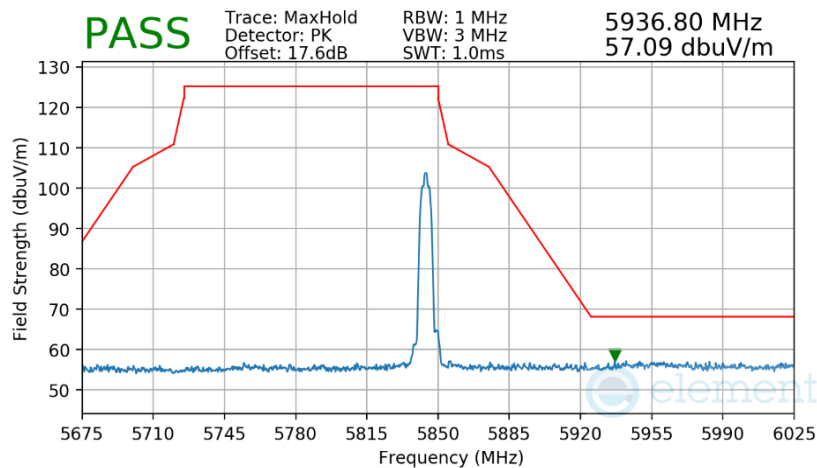


Plot 7-78. Radiated Upper Band Edge Measurement

FCC ID: BCG-A3454		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2512110102-06-R3.BCG	Test Dates: 12/11/2025 - 02/19/2026	EUT Type: Wireless Headphones	Page 77 of 87


V 11.0 06/2025

Mode: HDRp4
Measurement Distance: 3 Meters
Operating Frequency: 5844MHz

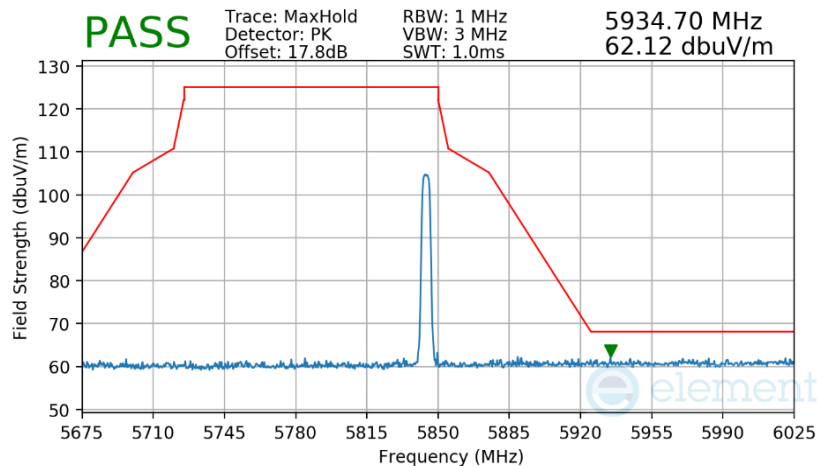

Plot 7-79. Radiated Upper Band Edge Measurement

Mode: HDRp8
Measurement Distance: 3 Meters
Operating Frequency: 5844MHz

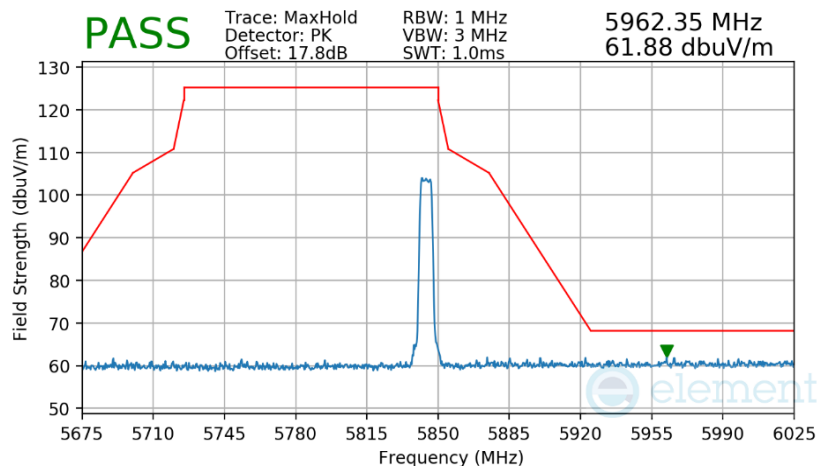

Plot 7-80. Radiated Upper Band Edge Measurement

FCC ID: BCG-A3454		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2512110102-06-R3.BCG	Test Dates: 12/11/2025 - 02/19/2026	EUT Type: Wireless Headphones	Page 78 of 87

V 11.0 06/2025

7.7 Radiated Spurious Emissions – Below 1GHz

§15.209

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 must not exceed the limits shown in Table 7-27 per Section 15.209.

Frequency	Field Strength [μV/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-27. Radiated Limits

Test Procedures Used

ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024

Test Settings

Quasi-Peak Field Strength Measurements

- Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- RBW = 120kHz (for emissions from 30MHz – 1GHz)
- Detector = quasi-peak
- Sweep time = auto couple
- Trace mode = max hold
- Trace was allowed to stabilize

Peak Field Strength Measurements

- Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- RBW = 120kHz (for emissions from 30MHz – 1GHz)
- VBW = 300kHz
- Detector = peak
- Sweep time = auto couple
- Trace mode = max hold
- Trace was allowed to stabilize

FCC ID: BCG-A3454		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2512110102-06-R3.BCG	Test Dates: 12/11/2025 - 02/19/2026	EUT Type: Wireless Headphones	Page 79 of 87

V 11.0 06/2025

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

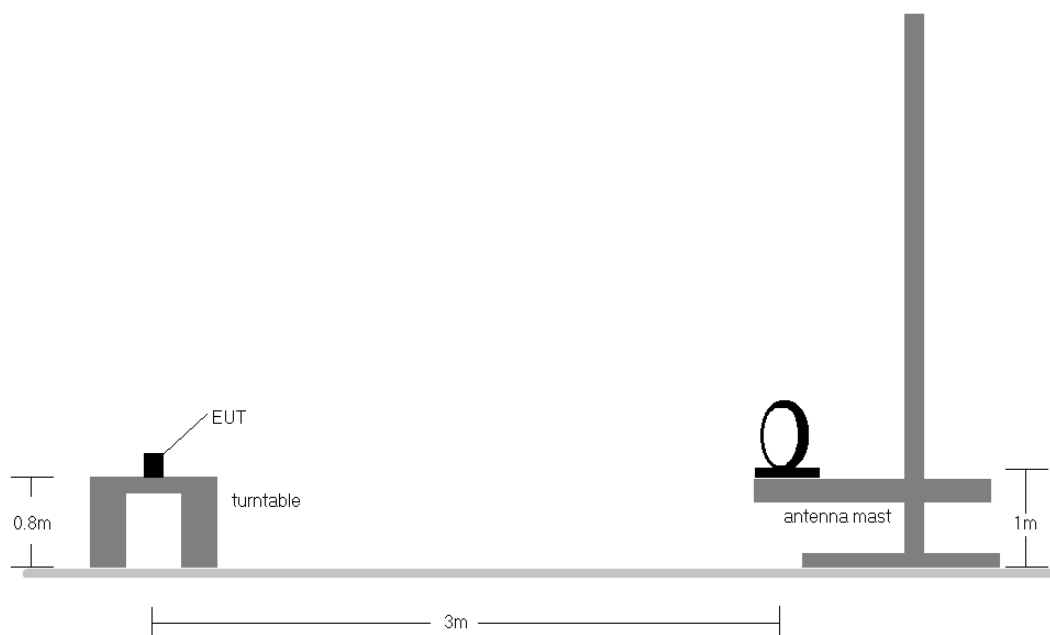


Figure 7-6. Radiated Test Setup < 30MHz

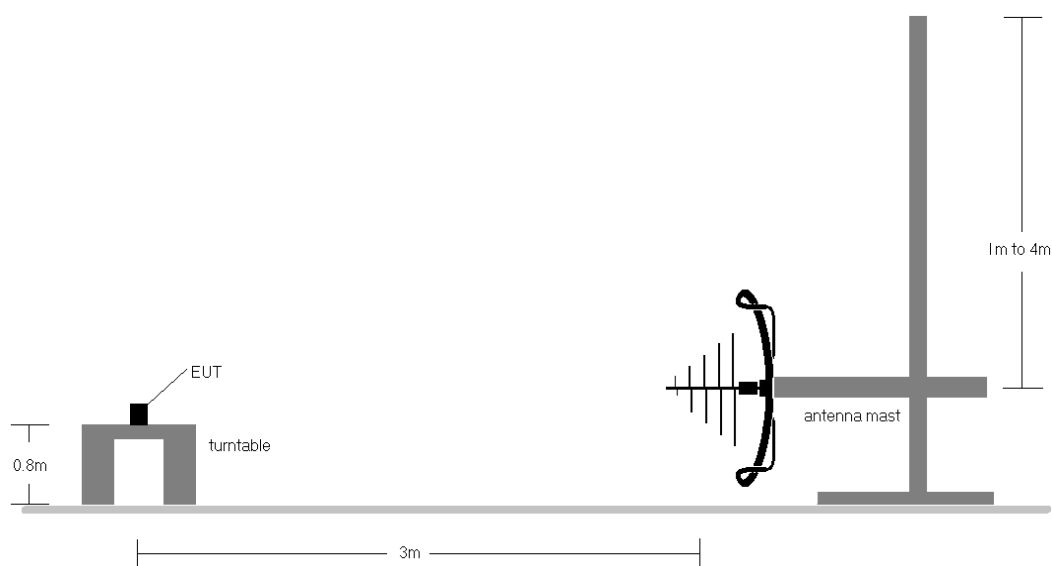


Figure 7-7. Radiated Test Setup < 1GHz

FCC ID: BCG-A3454		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2512110102-06-R3.BCG	Test Dates: 12/11/2025 - 02/19/2026	EUT Type: Wireless Headphones	Page 80 of 87

V 11.0 06/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Test Notes

1. All emissions lying in restricted bands specified in §15.205 are below the limit shown in Table 7-27.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes. For below 30MHz the loop antenna was positioned in 3 orthogonal planes (X front, Y side, Z top) to determine the orientation resulting in the worst case emissions.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector for emissions within 6dB of the limit.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. All supported modulation and power schemes have been tested on the unit and only worst case configuration is reported.
10. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor to USB-C cable with wire charger
 - b. EUT powered by host PC via USB-C cable with wire charger

Sample Calculations

Determining Spurious Emissions Levels


- Field Strength Level $_{[dB\mu V/m]} = \text{Analyzer Level }_{[dBm]} + 107 + \text{AFCL }_{[dB/m]}$
- $\text{AFCL }_{[dB/m]} = \text{Antenna Factor }_{[dB/m]} + \text{Cable Loss }_{[dB]} - \text{Preamplifier Gain }_{[dB]}$
- $\text{Margin }_{[dB]} = \text{Field Strength Level }_{[dB\mu V/m]} - \text{Limit }_{[dB\mu V/m]}$

FCC ID: BCG-A3454		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2512110102-06-R3.BCG	Test Dates: 12/11/2025 - 02/19/2026	EUT Type: Wireless Headphones	Page 81 of 87

V 11.0 06/2025

Radiated Spurious Emissions (Below 1GHz)

§15.209

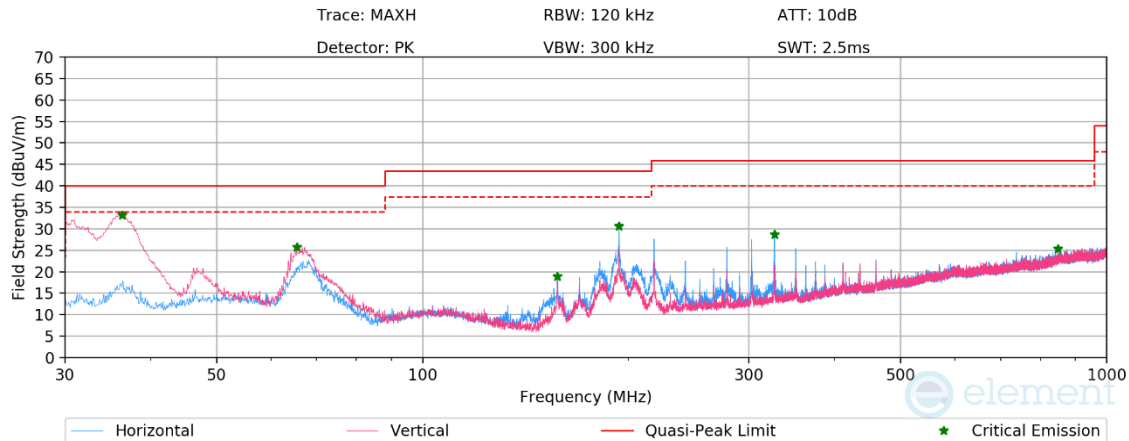

Plot 7-81. Radiated Spurious Emissions Below 1GHz (NB UNII BDR – 5200MHz), with AC/DC adaptor

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
36.36	Max-Peak	V	100	-	-53.45	-20.34	33.21	40.00	-6.79
65.46	Max-Peak	V	100	-	-60.82	-20.41	25.76	40.00	-14.24
157.45	Max-Peak	H	200	-	-66.49	-21.53	18.98	43.50	-24.52
193.75	Max-Peak	H	100	-	-57.61	-18.73	30.66	43.50	-12.84
326.95	Max-Peak	H	100	-	-63.27	-14.98	28.75	46.00	-17.25
848.49	Max-Peak	H	200	-	-76.81	-4.78	25.41	46.00	-20.59

Table 7-28. Radiated Spurious Emissions Below 1GHz (NB UNII BDR – 5200MHz), with AC/DC adaptor

FCC ID: BCG-A3454		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2512110102-06-R3.BCG	Test Dates: 12/11/2025 - 02/19/2026	EUT Type: Wireless Headphones	Page 82 of 87

V 11.0 06/2025

7.8 AC Line Conducted Emissions Measurement

§15.207

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for AC Line conducted spurious emissions. All data rates and modes were investigated for AC Line conducted spurious emissions.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207.

Frequency of emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-29. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024, Subclause 6.2

Test Settings

Quasi-Peak Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: BCG-A3454		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2512110102-06-R3.BCG	Test Dates: 12/11/2025 - 02/19/2026	EUT Type: Wireless Headphones	Page 83 of 87

V 11.0 06/2025

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

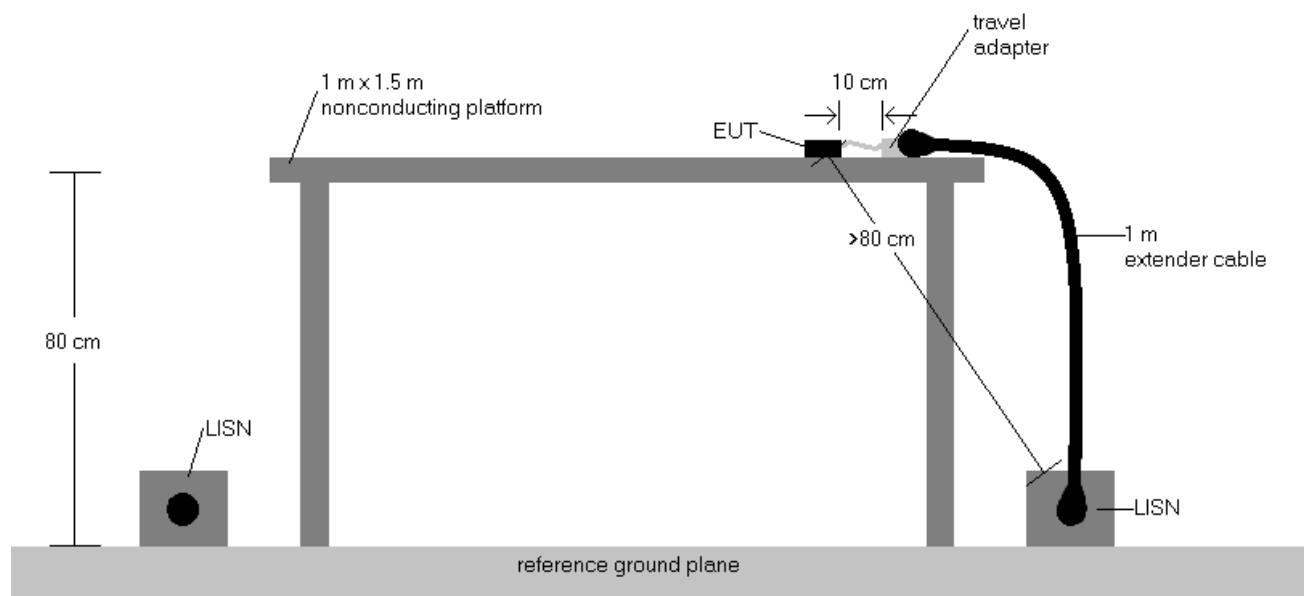



Figure 7-8. Test Instrument & Measurement Setup

Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported. The emissions found were not affected by the choice of channel used during testing.
2. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor to USB-C cable with wire charger
 - b. EUT powered by host PC via USB-C cable with wire charger
3. The limit for an intentional radiator from 150kHz to 30MHz are specified in 15.207.
4. $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
5. $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Correction Factor (dB)}$
6. $\text{Margin (dB)} = \text{QP/AV Level (dB}\mu\text{V)} - \text{QP/AV Limit (dB}\mu\text{V)}$
7. Traces shown in plots are made using quasi-peak and average detectors.
8. Deviations to the Specifications: None.

FCC ID: BCG-A3454		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2512110102-06-R3.BCG	Test Dates: 12/11/2025 - 02/19/2026	EUT Type: Wireless Headphones	Page 84 of 87

V 11.0 06/2025

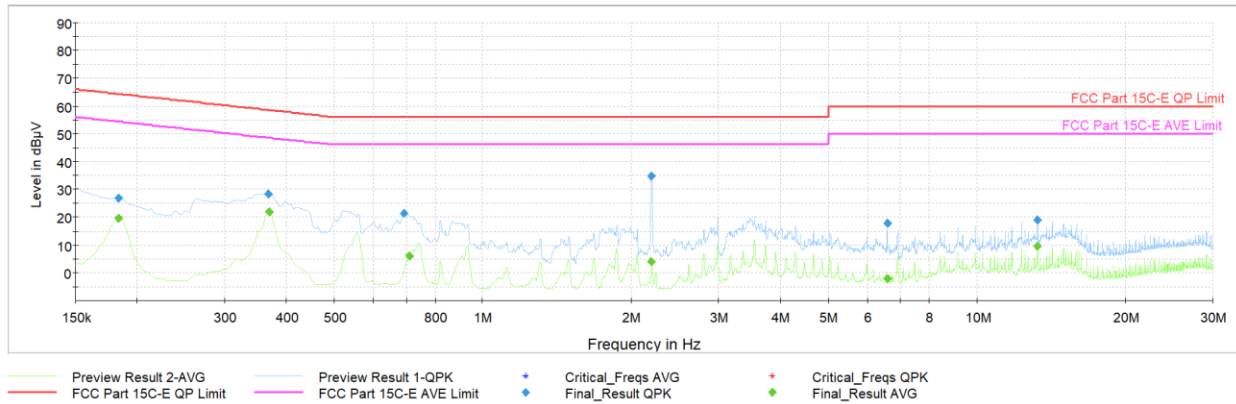


Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.184	FINAL	—	19.61	54.31	-34.71	L1	ON
0.184	FINAL	26.9	—	64.31	-37.44	L1	ON
0.368	FINAL	28.2	—	58.54	-30.32	L1	ON
0.371	FINAL	—	21.86	48.49	-26.63	L1	ON
0.692	FINAL	21.3	—	56.00	-34.67	L1	ON
0.710	FINAL	—	6.08	46.00	-39.92	L1	ON
2.195	FINAL	34.8	—	56.00	-21.21	L1	ON
2.195	FINAL	—	3.93	46.00	-42.07	L1	ON
6.590	FINAL	17.7	—	60.00	-42.29	L1	ON
6.590	FINAL	—	-1.99	50.00	-51.99	L1	ON
13.274	FINAL	—	9.59	50.00	-40.41	L1	ON
13.274	FINAL	19.1	—	60.00	-40.93	L1	ON

Table 7-30. AC Line Conducted (NB UNII BDR– 5200MHz) (L1) with PC via USB-C cable with wire charger

FCC ID: BCG-A3454		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2512110102-06-R3.BCG	Test Dates: 12/11/2025 - 02/19/2026	EUT Type: Wireless Headphones	Page 85 of 87

(UNII 1)

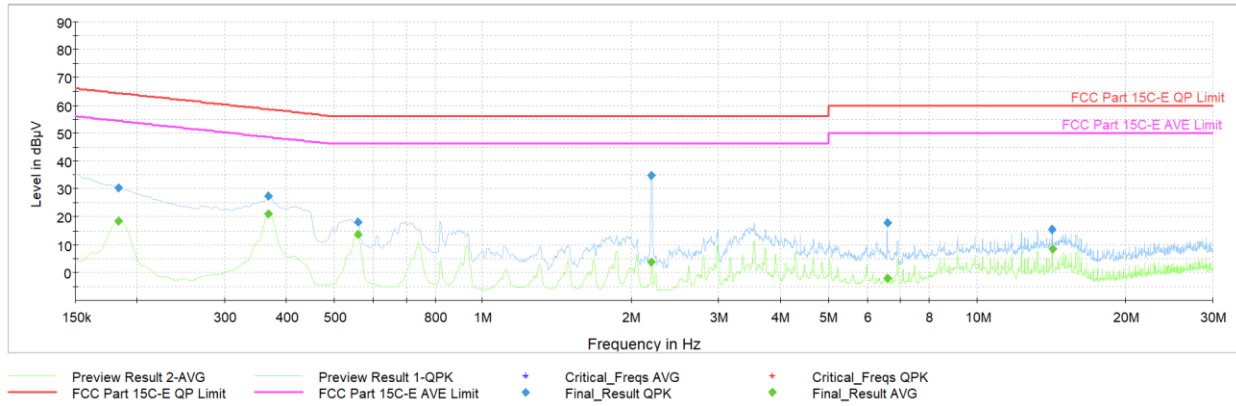

Plot 7-83. AC Line Conducted Plot (NB UNII BDR – 5200MHz) (N) with PC via USB-C cable with wire charger

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.184	FINAL	—	18.36	54.31	-35.96	N	ON
0.184	FINAL	30.4	—	64.31	-33.95	N	ON
0.368	FINAL	—	21.13	48.54	-27.41	N	ON
0.368	FINAL	27.4	—	58.54	-31.17	N	ON
0.560	FINAL	—	13.70	46.00	-32.30	N	ON
0.560	FINAL	18.2	—	56.00	-37.84	N	ON
2.195	FINAL	34.9	—	56.00	-21.12	N	ON
2.195	FINAL	—	3.76	46.00	-42.24	N	ON
6.587	FINAL	17.8	—	60.00	-42.20	N	ON
6.587	FINAL	—	-2.19	50.00	-52.19	N	ON
14.186	FINAL	15.5	—	60.00	-44.47	N	ON
14.199	FINAL	—	8.34	50.00	-41.66	N	ON

Table 7-31. AC Line Conducted (NB UNII BDR – 5200MHz) (N) with PC via USB-C cable with wire charger

FCC ID: BCG-A3454		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2512110102-06-R3.BCG	Test Dates: 12/11/2025 - 02/19/2026	EUT Type: Wireless Headphones	Page 86 of 87

V 11.0 06/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Apple Wireless Headphones** **FCC ID: BCG-A3454** is in compliance with Part 15 Subpart E (15.407) of the FCC Rules.

FCC ID: BCG-A3454		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2512110102-06-R3.BCG	Test Dates: 12/11/2025 - 02/19/2026	EUT Type: Wireless Headphones	Page 87 of 87

V 11.0 06/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.