


7.8.1 Radiated Spurious Emission Measurements

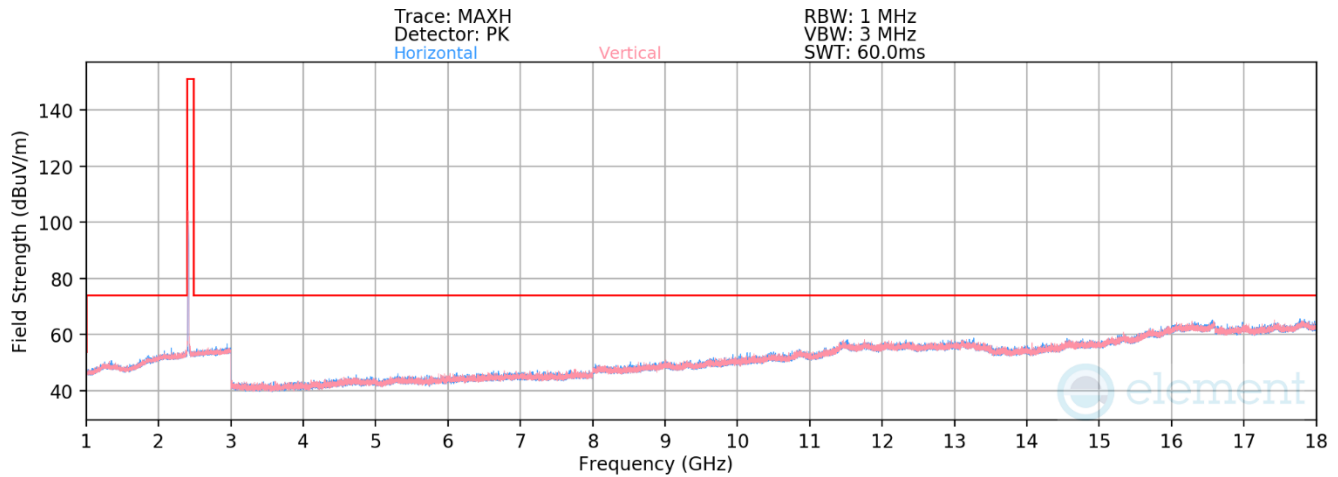


Plot 7-29. Radiated Spurious Emissions above 1GHz (802.11b – Ch. 1)

Mode: 802.11b
Data Rate: 11Mbps
Distance of Measurements: 3 Meters
Operating Frequency: 2412MHz
Channel: 01


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4824.00	Avg	V	-	-	-79.81	6.42	33.61	53.98	-20.37
4824.00	Peak	V	-	-	-67.67	6.42	45.75	73.98	-28.23
12060.00	Avg	V	-	-	-77.96	16.82	45.86	53.98	-8.12
12060.00	Peak	V	-	-	-67.11	16.77	56.66	73.98	-17.32

Table 7-8. Radiated Measurements

FCC ID: BCG-A3581 IC: 579C-A3581	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/1/2026 - 7/22/2026	EUT Type: Watch	Approved by: Technical Manager
Test Report S/N: 1C2604100028-01.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 47 of 67

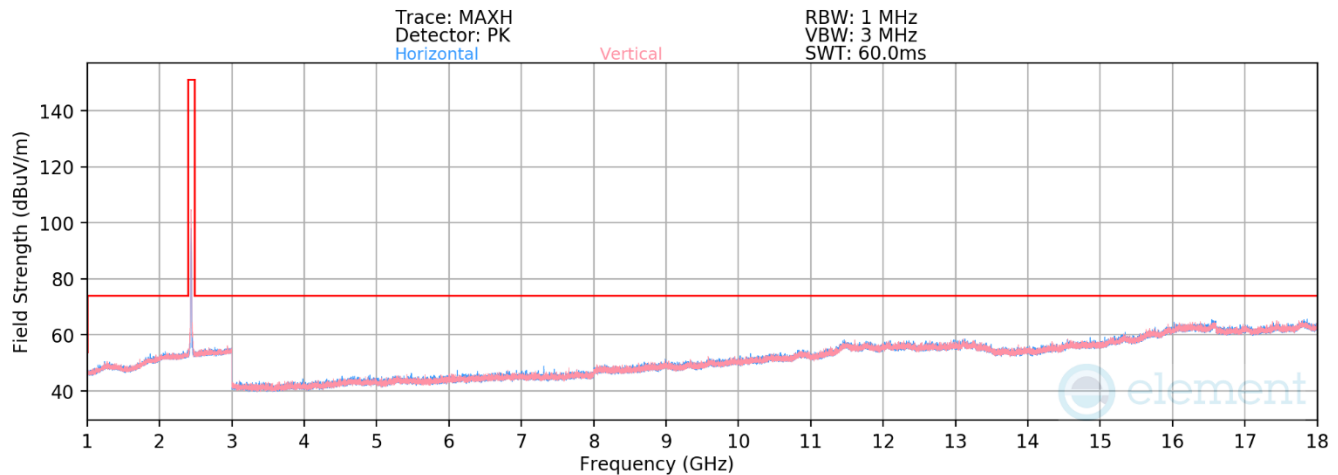

Plot 7-30. Radiated Spurious Emissions above 1GHz (802.11b – Ch. 6)

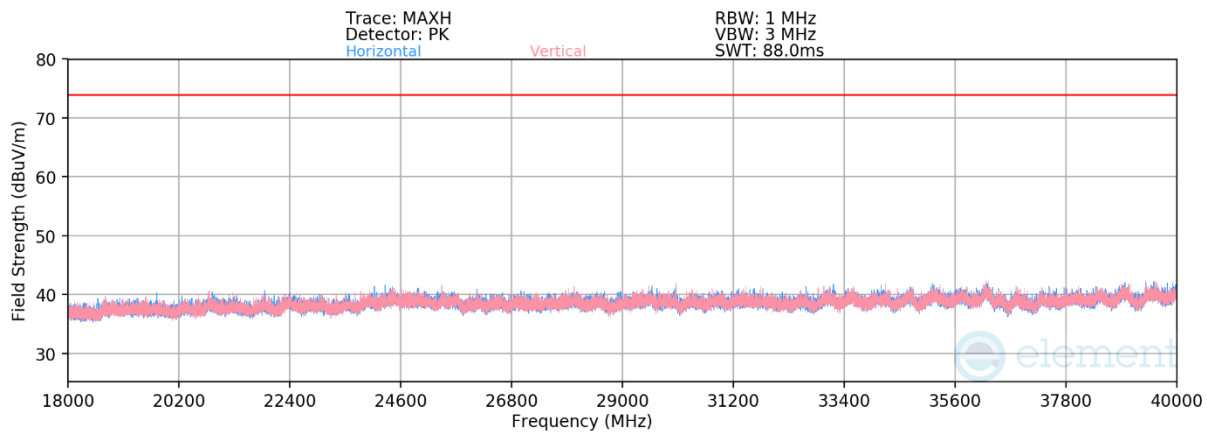


Plot 7-31. Radiated Spurious Emissions above 18GHz (802.11b – Ch. 6)

Mode: 802.11b
Data Rate: 11Mbps
Distance of Measurements: 3 Meters
Operating Frequency: 2437MHz
Channel: 06

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
4874.00	Avg	V	-	-	-79.98	6.65	0.00	33.67	53.98	-20.31
4874.00	Peak	V	-	-	-68.45	6.68	0.00	45.23	73.98	-28.75
7311.00	Avg	H	243	221	-76.99	9.26	0.00	39.27	53.98	-14.71
7311.00	Peak	H	243	221	-67.65	9.26	0.00	48.61	73.98	-25.37
12185.00	Avg	V	-	-	-78.28	16.29	0.00	45.01	53.98	-8.97
12185.00	Peak	V	-	-	-67.24	16.29	0.00	56.05	73.98	-17.93
19496.00	Avg	H	-	-	-65.38	-6.09	-9.54	25.99	53.98	-27.99
19496.00	Peak	H	-	-	-58.63	-5.98	-9.54	32.85	73.98	-41.13

Table 7-9. Radiated Measurements

FCC ID: BCG-A3581 IC: 579C-A3581	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/1/2026 - 7/22/2026	EUT Type: Watch	Approved by: Technical Manager
Test Report S/N: 1C2604100028-01.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 48 of 67

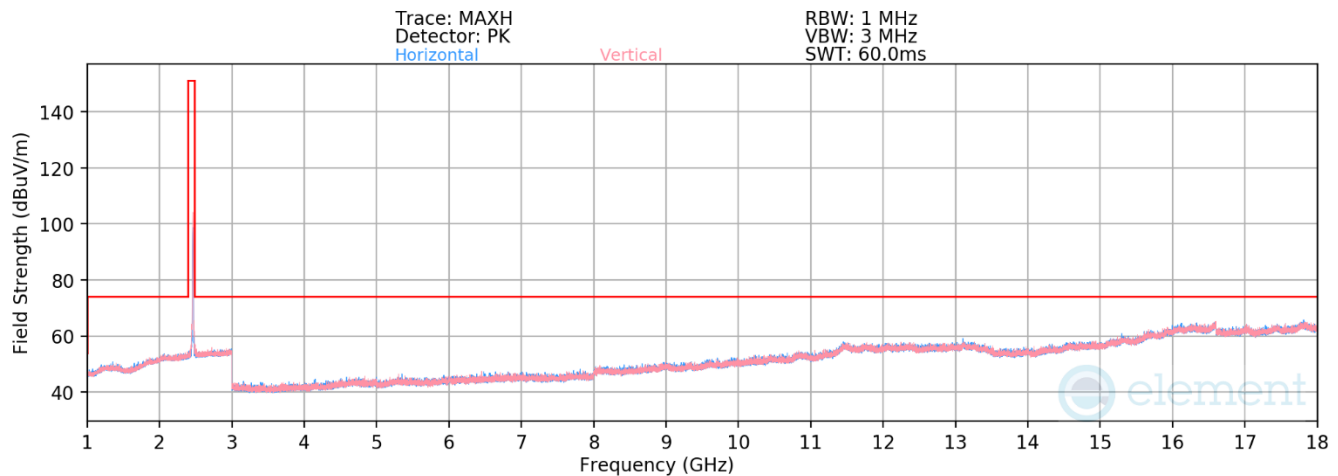

Plot 7-32. Radiated Spurious Emissions above 1GHz (802.11b – Ch. 11)

Mode: 802.11b
Data Rate: 11Mbps
Distance of Measurements: 3 Meters
Operating Frequency: 2462MHz
Channel: 11


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
4924.00	Avg	H	-	-	-79.87	6.63	33.76	53.98	-20.22
4924.00	Peak	H	-	-	-68.61	6.77	45.16	73.98	-28.82
7386.00	Avg	H	246	218	-78.24	9.17	37.93	53.98	-16.05
7386.00	Peak	H	246	218	-68.40	9.17	47.77	73.98	-26.21
12310.00	Avg	V	-	-	-78.59	17.00	45.41	53.98	-8.57
12310.00	Peak	V	-	-	-67.19	17.00	56.81	73.98	-17.17

Table 7-10. Radiated Measurements

FCC ID: BCG-A3581 IC: 579C-A3581	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/1/2026 - 7/22/2026	EUT Type: Watch	Approved by: Technical Manager
Test Report S/N: 1C2604100028-01.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 49 of 67


7.8.2 Radiated Restricted Band Edge Measurements

Mode	802.11b
Data Rate	1Mbps
Distance of Measurement	3 Meters
Operating Frequency	2412MHz
Channel	1

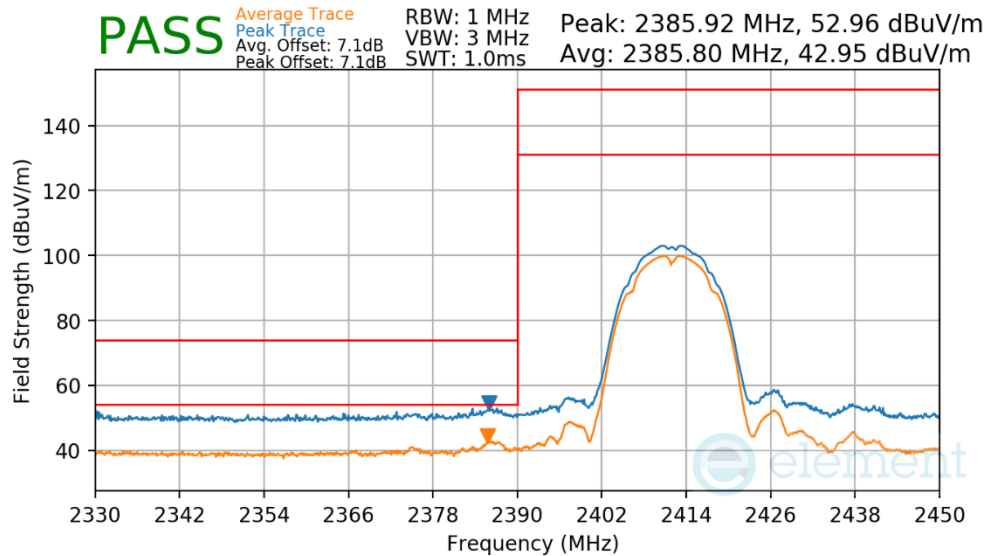

Plot 7-33 Radiated Restricted Lower Band Edge Measurement


Mode	802.11b
Data Rate	1Mbps
Distance of Measurement	3 Meters
Operating Frequency	2462MHz
Channel	11

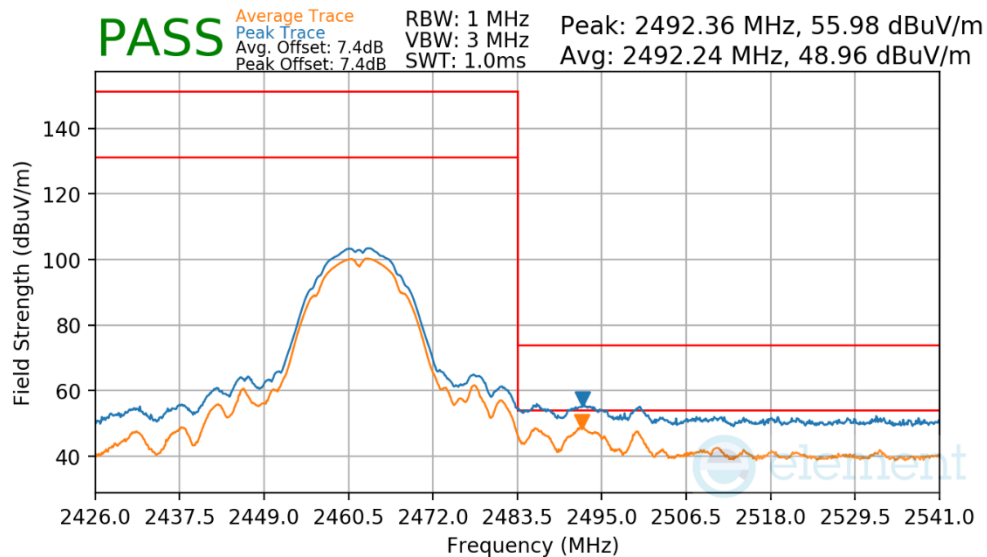

Plot 7-34 Radiated Restricted Upper Band Edge Measurement


FCC ID: BCG-A3581 IC: 579C-A3581	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/1/2026 - 7/22/2026	EUT Type: Watch	Approved by: Technical Manager
Test Report S/N: 1C2604100028-01.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 50 of 67

Mode	802.11b
Data Rate	1Mbps
Distance of Measurement	3 Meters
Operating Frequency	2467MHz
Channel	12

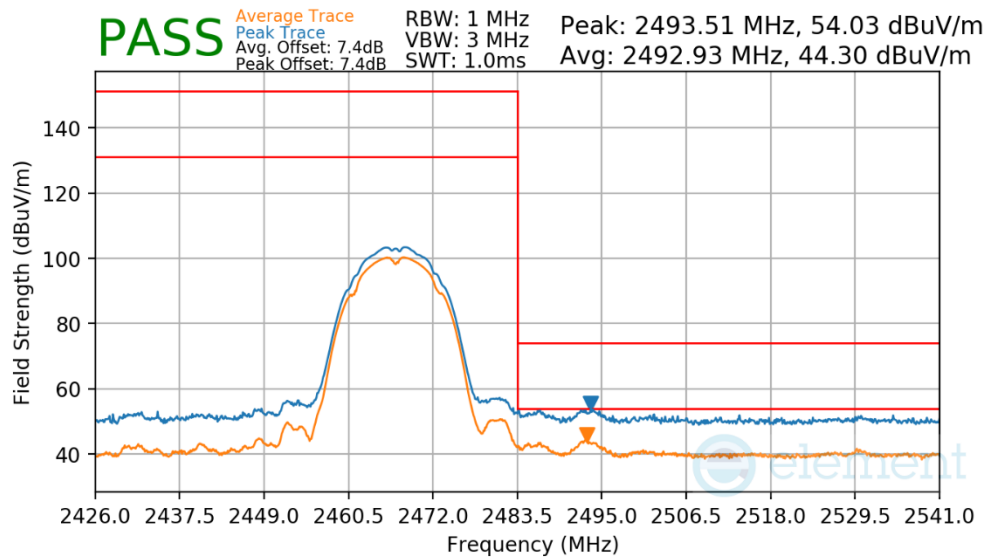

Plot 7-35 Radiated Restricted Upper Band Edge Measurement


Mode	802.11b
Data Rate	1Mbps
Distance of Measurement	3 Meters
Operating Frequency	2472MHz
Channel	13

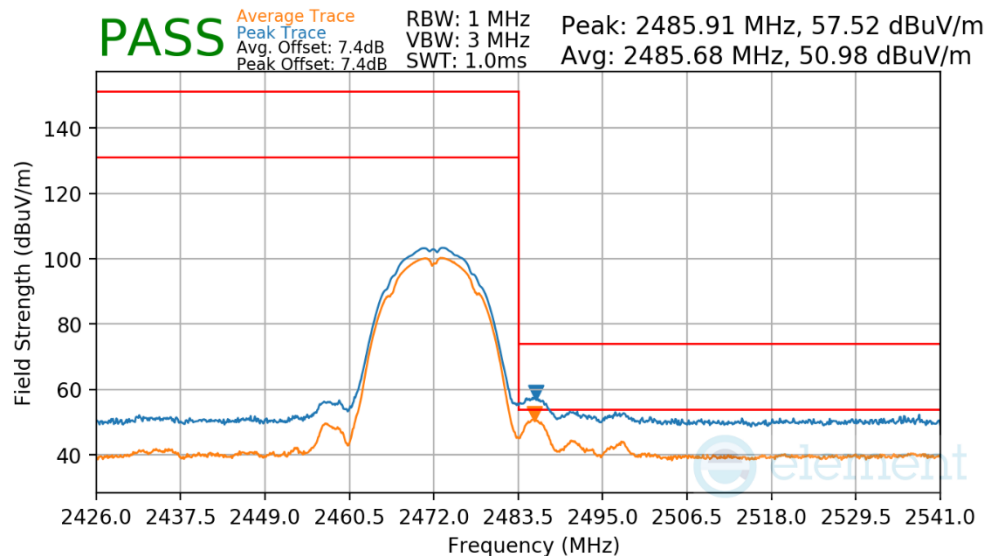

Plot 7-36 Radiated Restricted Upper Band Edge Measurement


FCC ID: BCG-A3581 IC: 579C-A3581	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/1/2026 - 7/22/2026	EUT Type: Watch	Approved by: Technical Manager
Test Report S/N: 1C2604100028-01.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 51 of 67

Mode	802.11n
Data Rate	MCS0
Distance of Measurement	3 Meters
Operating Frequency	2412MHz
Channel	1

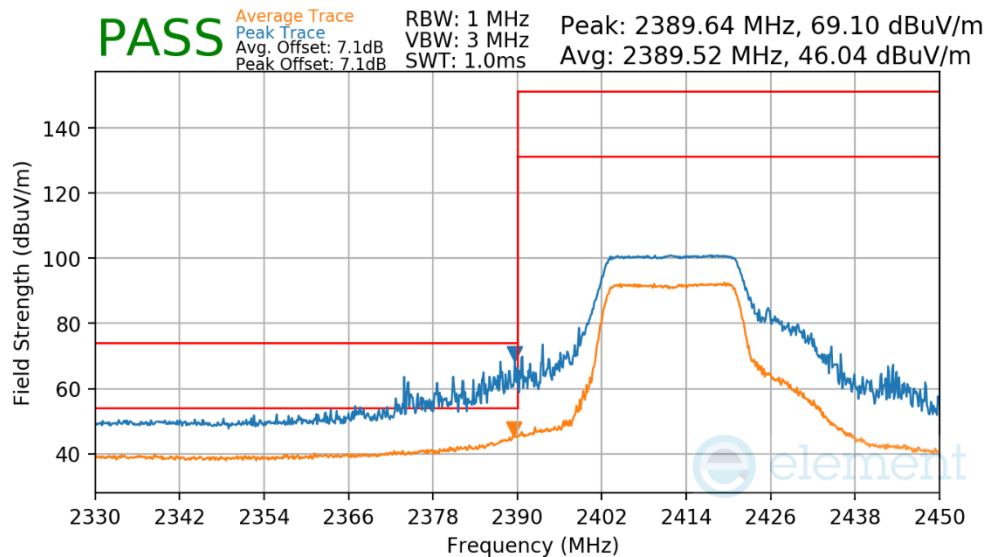

Plot 7-37 Radiated Restricted Lower Band Edge Measurement


Mode	802.11n
Data Rate	MCS0
Distance of Measurement	3 Meters
Operating Frequency	2417MHz
Channel	2

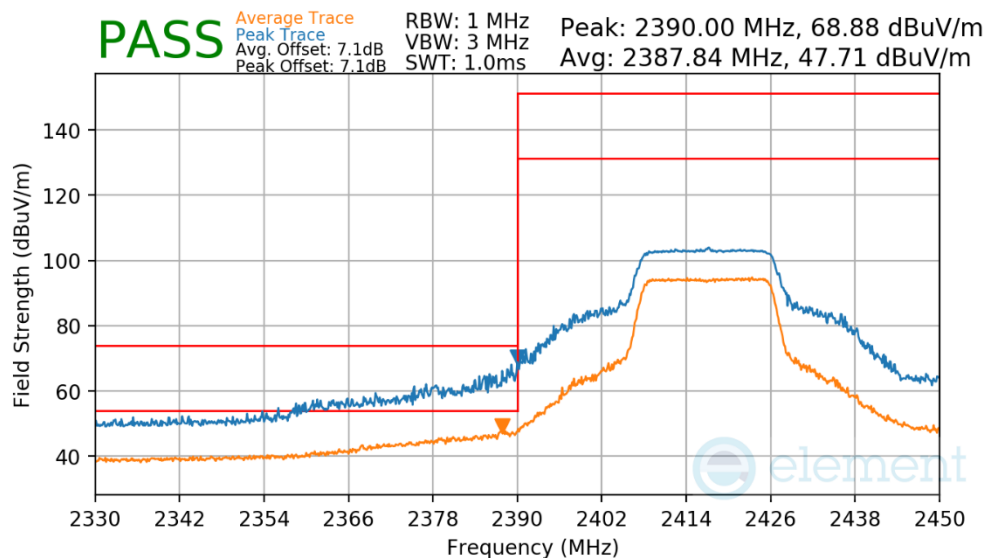

Plot 7-38 Radiated Restricted Lower Band Edge Measurement


FCC ID: BCG-A3581 IC: 579C-A3581	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/1/2026 - 7/22/2026	EUT Type: Watch	Approved by: Technical Manager
Test Report S/N: 1C2604100028-01.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 52 of 67

Mode	802.11n
Data Rate	MCS0
Distance of Measurement	3 Meters
Operating Frequency	2422MHz
Channel	3

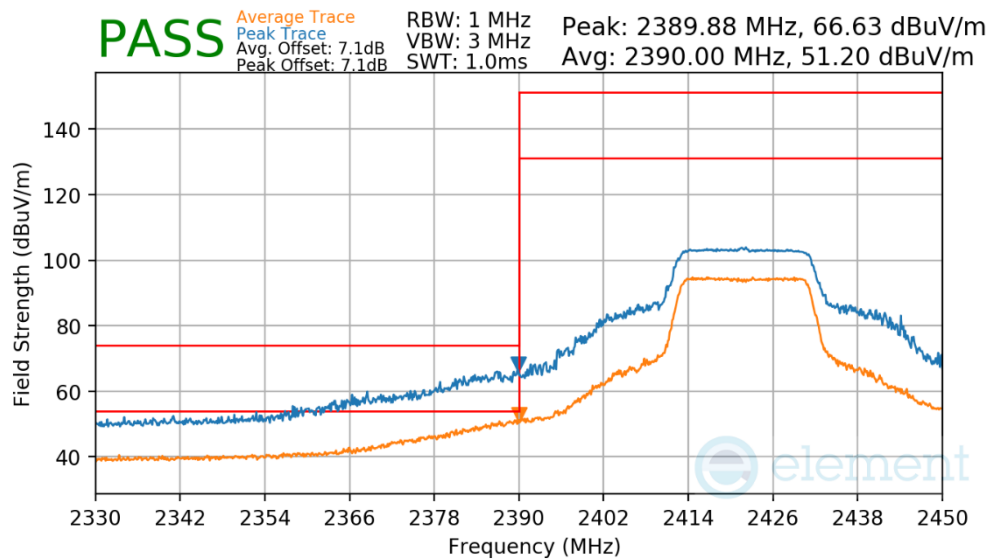

Plot 7-39 Radiated Restricted Lower Band Edge Measurement


Mode	802.11n
Data Rate	MCS0
Distance of Measurement	3 Meters
Operating Frequency	2457MHz
Channel	10

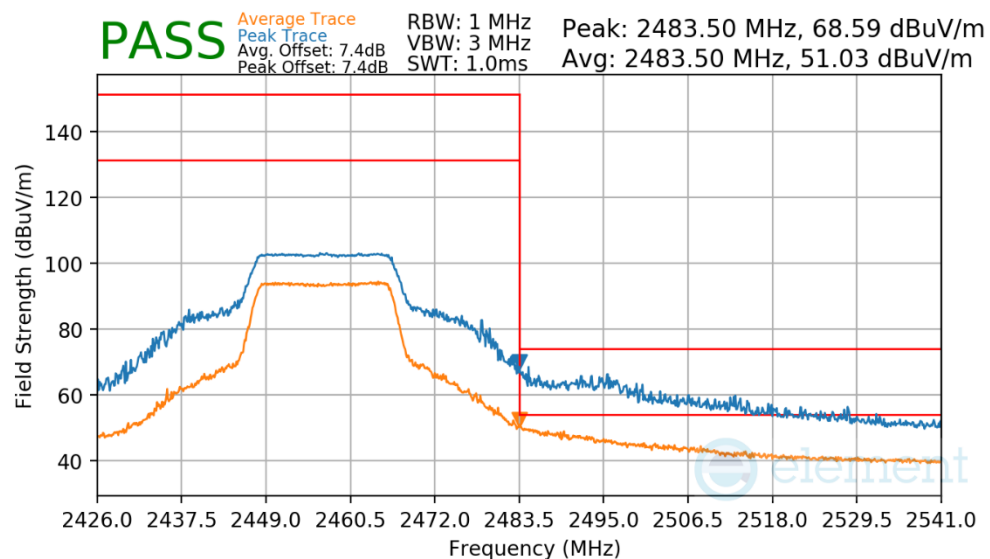

Plot 7-40 Radiated Restricted Upper Band Edge Measurement


FCC ID: BCG-A3581 IC: 579C-A3581	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/1/2026 - 7/22/2026	EUT Type: Watch	Approved by: Technical Manager
Test Report S/N: 1C2604100028-01.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 53 of 67

Mode	802.11n
Data Rate	MCS0
Distance of Measurement	3 Meters
Operating Frequency	2462MHz
Channel	11

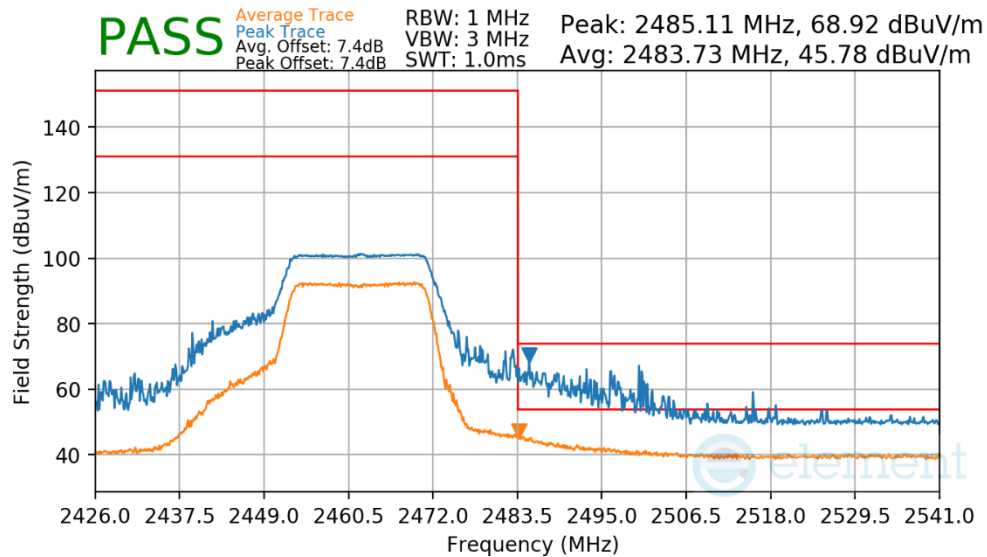

Plot 7-41 Radiated Restricted Upper Band Edge Measurement


Mode	802.11n
Data Rate	MCS0
Distance of Measurement	3 Meters
Operating Frequency	2467MHz
Channel	12

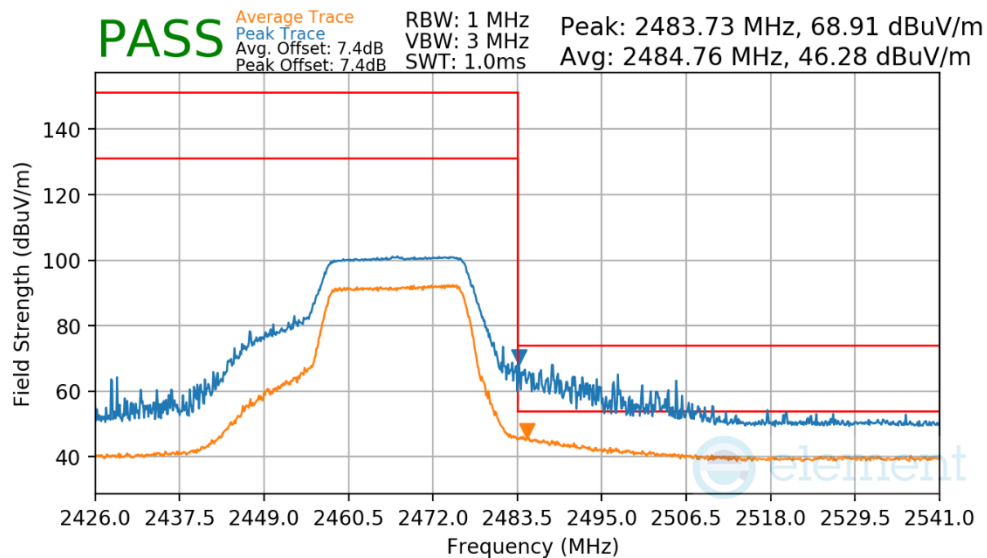

Plot 7-42 Radiated Restricted Upper Band Edge Measurement

FCC ID: BCG-A3581 IC: 579C-A3581	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/1/2026 - 7/22/2026	EUT Type: Watch	Approved by: Technical Manager
Test Report S/N: 1C2604100028-01.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 54 of 67


Mode	802.11n
Data Rate	MCS0
Distance of Measurement	3 Meters
Operating Frequency	2472MHz
Channel	13

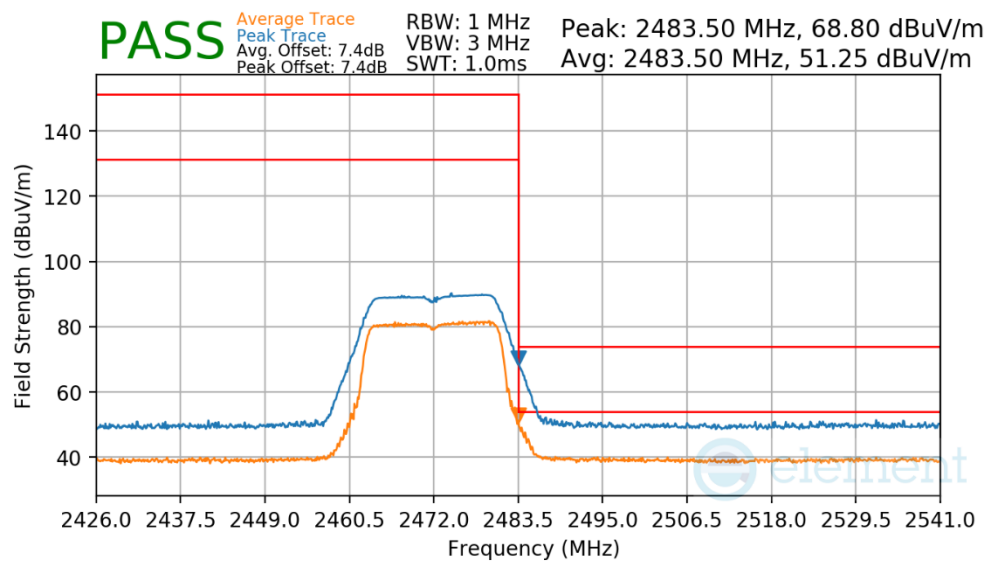

Plot 7-43 Radiated Restricted Upper Band Edge Measurement


FCC ID: BCG-A3581 IC: 579C-A3581	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/1/2026 - 7/22/2026	EUT Type: Watch	Approved by: Technical Manager
Test Report S/N: 1C2604100028-01.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 55 of 67

Mode	802.11n
Data Rate	MCS7
Distance of Measurement	3 Meters
Operating Frequency	2412MHz
Channel	1

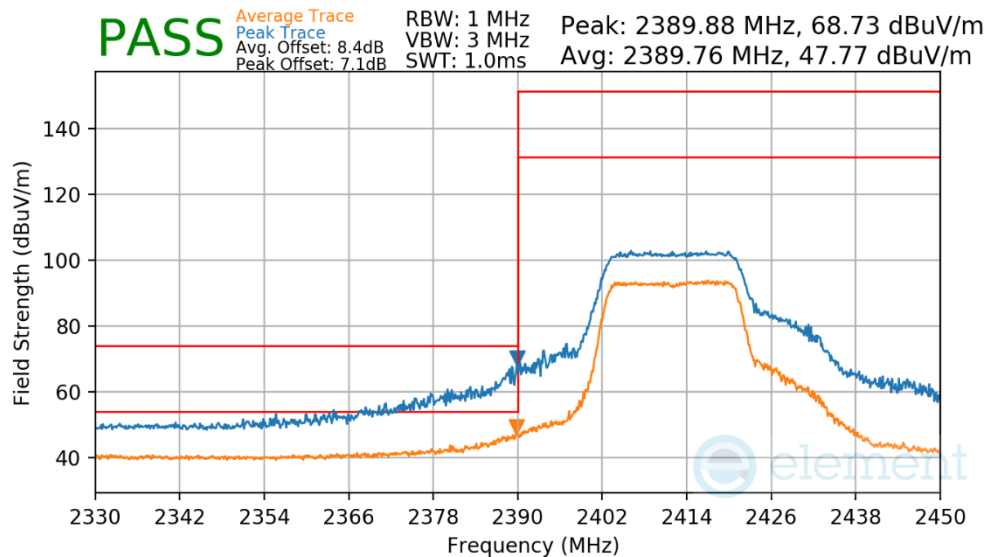

Plot 7-44 Radiated Restricted Lower Band Edge Measurement


Mode	802.11n
Data Rate	MCS7
Distance of Measurement	3 Meters
Operating Frequency	2457MHz
Channel	10

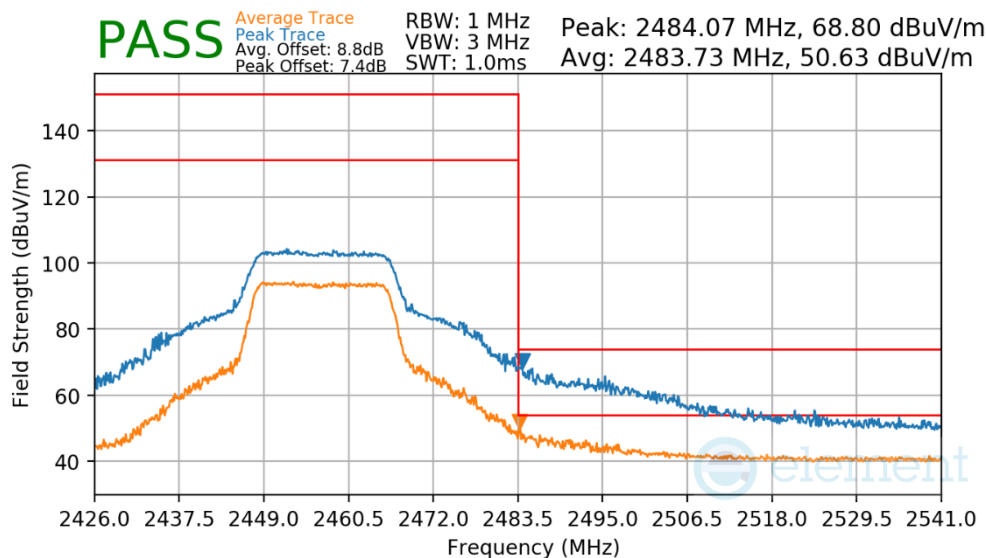

Plot 7-45 Radiated Restricted Upper Band Edge Measurement


FCC ID: BCG-A3581 IC: 579C-A3581	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/1/2026 - 7/22/2026	EUT Type: Watch	Approved by: Technical Manager
Test Report S/N: 1C2604100028-01.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 56 of 67

Mode	802.11n
Data Rate	MCS7
Distance of Measurement	3 Meters
Operating Frequency	2462MHz
Channel	11

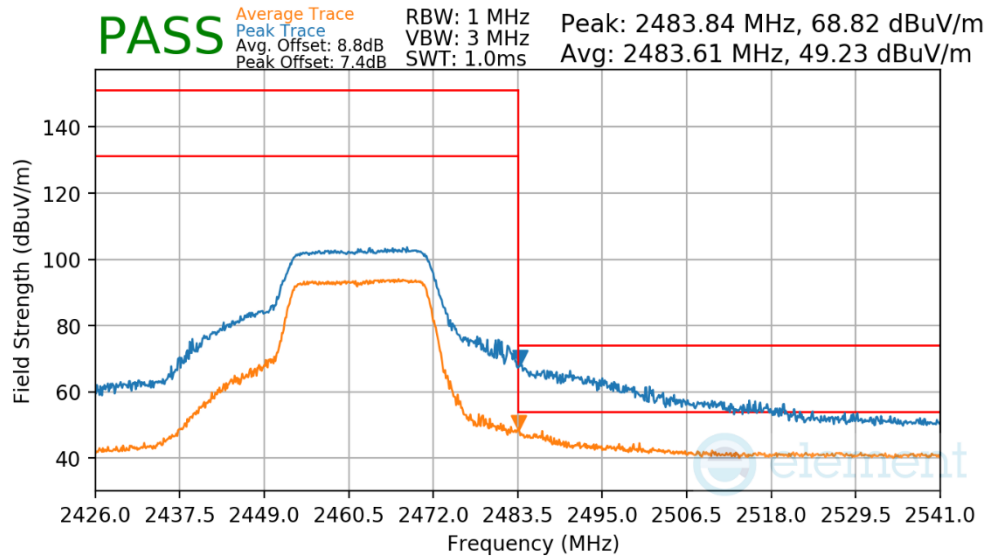

Plot 7-46 Radiated Restricted Upper Band Edge Measurement


Mode	802.11n
Data Rate	MCS7
Distance of Measurement	3 Meters
Operating Frequency	2467MHz
Channel	12

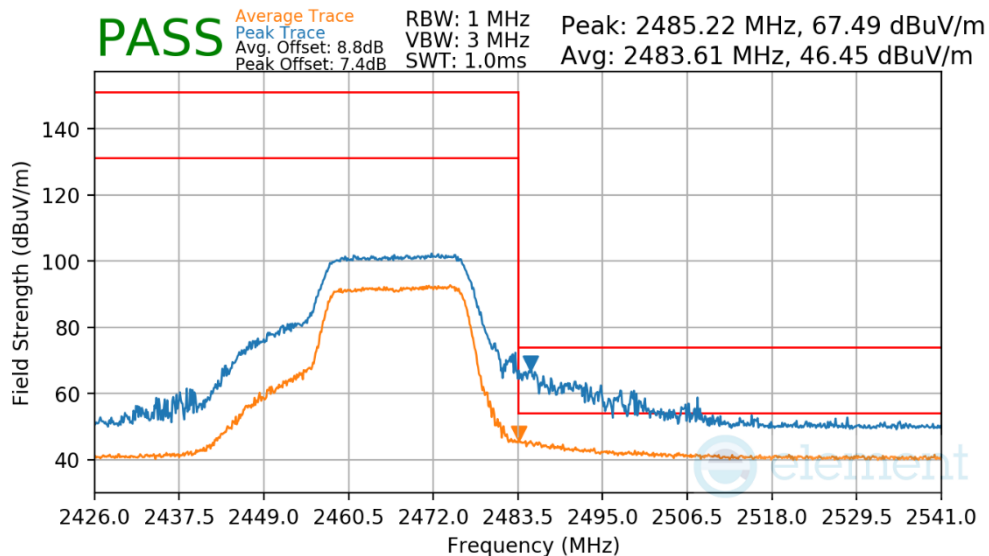

Plot 7-47 Radiated Restricted Upper Band Edge Measurement

FCC ID: BCG-A3581 IC: 579C-A3581	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/1/2026 - 7/22/2026	EUT Type: Watch	Approved by: Technical Manager
Test Report S/N: 1C2604100028-01.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 57 of 67

Mode	802.11n
Data Rate	MCS7
Distance of Measurement	3 Meters
Operating Frequency	2472MHz
Channel	13

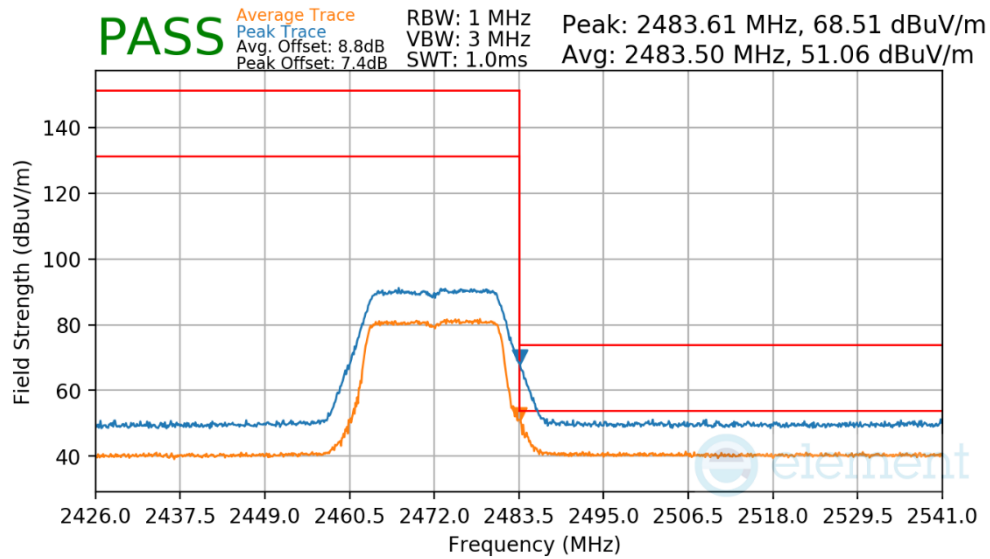

Plot 7-48 Radiated Restricted Upper Band Edge Measurement

FCC ID: BCG-A3581 IC: 579C-A3581	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/1/2026 - 7/22/2026	EUT Type: Watch	Approved by: Technical Manager
Test Report S/N: 1C2604100028-01.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 58 of 67

7.9 Radiated Spurious Emissions – Below 1GHz

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (7.5) must not exceed the limits shown in Table 7-11 per Section 15.209 and RSS-Gen (7.4.3).

Frequency	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-11. Radiated Limits

Test Procedures Used

ANSI C63.10-2020+COR. 1-2023+C63.10A-2024 + ERRATA TO C63.10A-2024

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. VBW = 300kHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold

FCC ID: BCG-A3581 IC: 579C-A3581	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/1/2026 - 7/22/2026	EUT Type: Watch	Approved by: Technical Manager
Test Report S/N: 1C2604100028-01.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 59 of 67

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

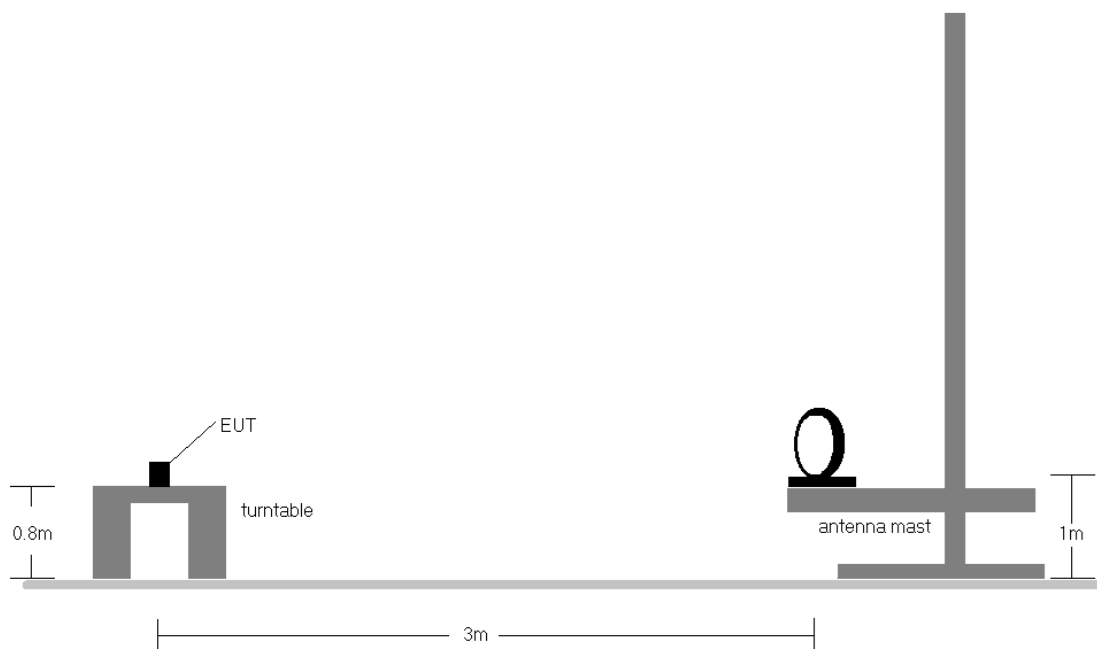


Figure 7-8. Radiated Test Setup < 30Mhz

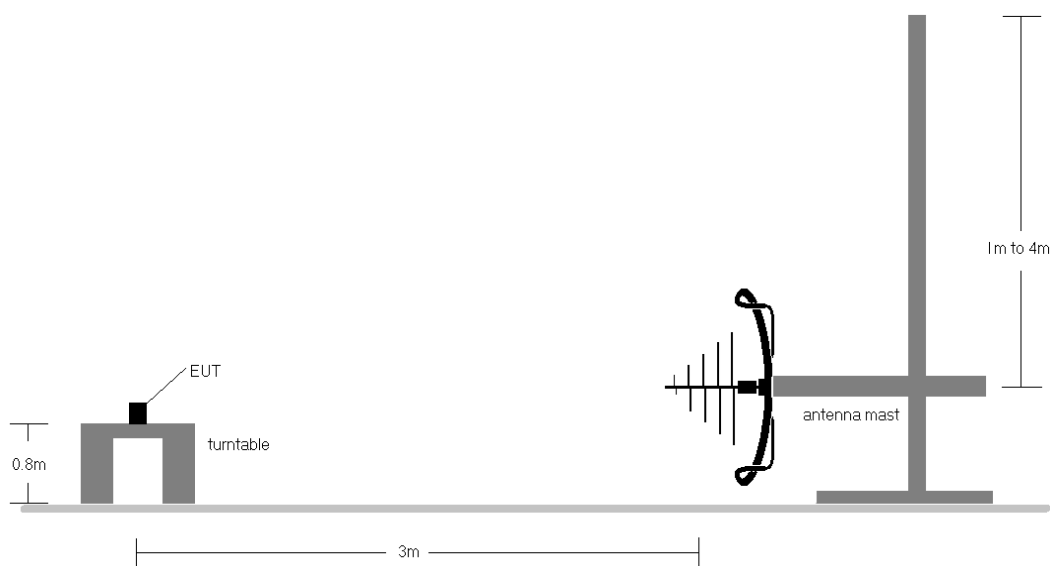


Figure 7-9. Radiated Test Setup < 1GHz

FCC ID: BCG-A3581 IC: 579C-A3581	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/1/2026 - 7/22/2026	EUT Type: Watch	Approved by: Technical Manager
Test Report S/N: 1C2604100028-01.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 60 of 67

V 12.0 03/03/2026

Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen (7.5) are below the limit shown in Table 7-11.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes. For below 30MHz the loop antenna was positioned in 3 orthogonal planes (X front, Y side, Z top) to determine the orientation resulting in the worst case emissions.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector for emissions within 6dB of the limit.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor via USB-C cable with magnetic charger
 - b. EUT powered by host PC via USB-C cable with magnetic charger
9. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
10. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification.
11. The unit was tested with all possible modes and only the highest emission is reported.
12. All antenna configurations were investigated and only the worst case is reported.


Sample Calculations

Determining Spurious Emissions Levels

- Field Strength Level $[\text{dB}\mu\text{V/m}] = \text{Analyzer Level} [\text{dBm}] + 107 + \text{AFCL} [\text{dB/m}]$
- $\text{AFCL} [\text{dB/m}] = \text{Antenna Factor} [\text{dB/m}] + \text{Cable Loss} [\text{dB}] - \text{Preamplifier Gain} [\text{dB}]$
- $\text{Margin} [\text{dB}] = \text{Field Strength Level} [\text{dB}\mu\text{V/m}] - \text{Limit} [\text{dB}\mu\text{V/m}]$

FCC ID: BCG-A3581 IC: 579C-A3581	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/1/2026 - 7/22/2026	EUT Type: Watch	Approved by: Technical Manager
Test Report S/N: 1C2604100028-01.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 61 of 67

Radiated Spurious Emissions Measurements (Below 1GHz)

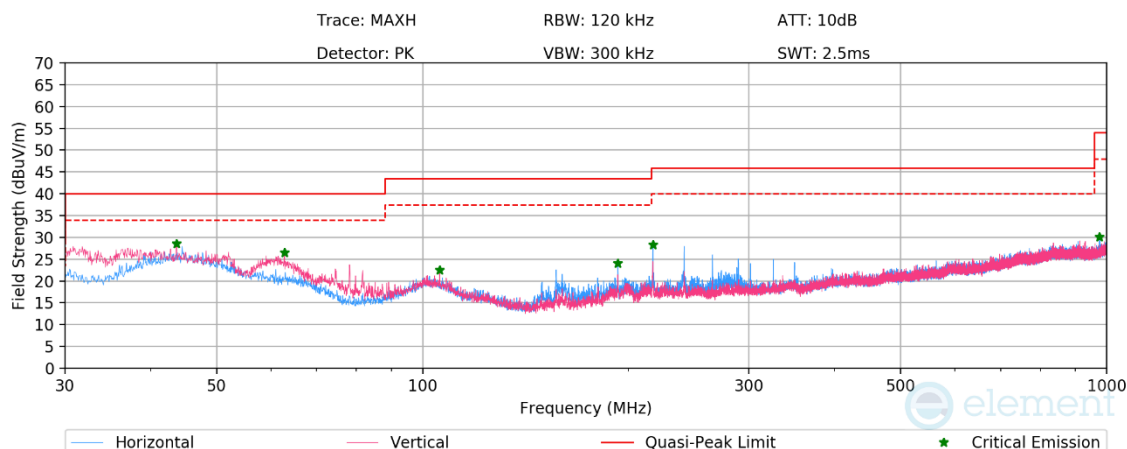

Plot 7-49. Radiated Spurious Emissions below 1GHz 11b Ch.6, with AC/DC Adaptor

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
43.68	MaxPeak	V	100	44	-63.00	-15.42	28.58	40.00	-11.42
62.82	MaxPeak	V	100	289	-62.69	-17.74	26.57	40.00	-13.43
105.90	MaxPeak	V	100	34	-66.38	-18.11	22.51	43.52	-21.01
192.97	MaxPeak	H	100	249	-64.91	-17.97	24.12	43.52	-19.40
217.15	MaxPeak	H	100	269	-61.04	-17.65	28.31	46.02	-17.71
976.12	MaxPeak	H	300	3	-73.14	-3.81	30.05	53.98	-23.93

Table 7-12. Radiated Spurious Emissions below 1GHz 11b Ch.6, with AC/DC Adaptor

FCC ID: BCG-A3581 IC: 579C-A3581	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/1/2026 - 7/22/2026	EUT Type: Watch	Approved by: Technical Manager
Test Report S/N: 1C2604100028-01.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 62 of 67

7.10 AC Line-Conducted Emissions

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for AC Line conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (7.4.2).

Frequency of emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-13. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10-2020+COR. 1-2023+C63.10A-2024 + ERRATA TO C63.10A-2024, Subclause 6.2

Test Settings

Quasi-Peak Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: BCG-A3581 IC: 579C-A3581	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/1/2026 - 7/22/2026	EUT Type: Watch	Approved by: Technical Manager
Test Report S/N: 1C2604100028-01.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 63 of 67

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


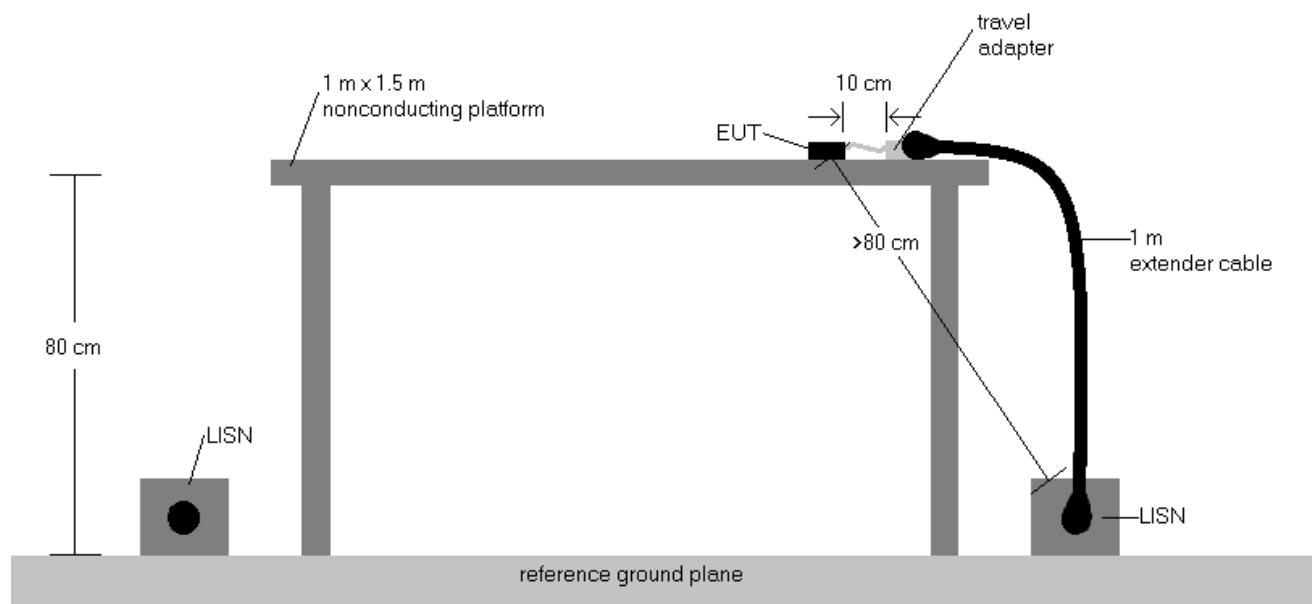


Figure 7-10. Test Instrument & Measurement Setup

Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported. The emissions found were not affected by the choice of channel used during testing.
2. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor via USB-C cable with magnetic charger
 - b. EUT powered by host PC via USB-C cable with magnetic charger
3. The limit for an intentional radiator from 150kHz to 30MHz are specified in Part 15.207 and RSS-Gen(7.4.2).
4. $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
5. $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Corr. (dB)}$
6. $\text{Margin (dB)} = \text{QP/AV Level (dB}\mu\text{V)} - \text{QP/AV Limit (dB}\mu\text{V)}$
7. Traces shown in plot are made using quasi peak and average detectors.
8. Deviations to the Specifications: None.
9. The unit was tested with all possible modes and only the highest emission is reported.

FCC ID: BCG-A3581 IC: 579C-A3581	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/1/2026 - 7/22/2026	EUT Type: Watch	Approved by: Technical Manager
Test Report S/N: 1C2604100028-01.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 64 of 67

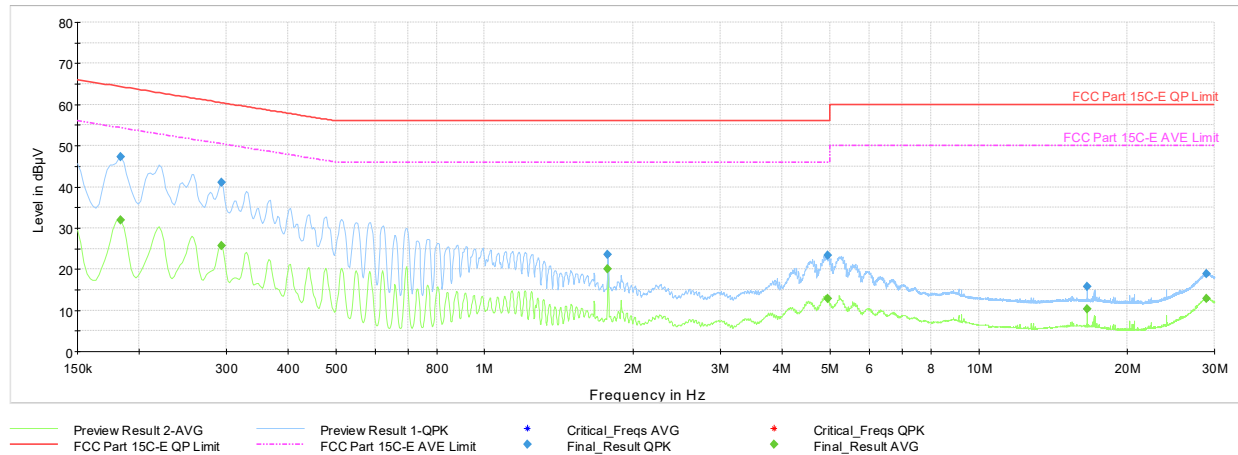


Plot 7-50. AC Line Conducted Plot with 11b Ch.6 (L1, with AC/DC Adaptor)

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.184	FINAL	—	31.96	54.31	-22.36	L1	GND
0.184	FINAL	47.2	—	64.31	-17.09	L1	GND
0.294	FINAL	—	25.78	50.41	-24.63	L1	GND
0.294	FINAL	41.0	—	60.41	-19.37	L1	GND
1.777	FINAL	—	20.03	46.00	-25.97	L1	GND
1.777	FINAL	23.5	—	56.00	-32.52	L1	GND
4.940	FINAL	23.4	—	56.00	-32.59	L1	GND
4.940	FINAL	—	12.94	46.00	-33.06	L1	GND
16.553	FINAL	15.7	—	60.00	-44.27	L1	GND
16.553	FINAL	—	10.28	50.00	-39.72	L1	GND
28.892	FINAL	—	12.78	50.00	-37.22	L1	GND
28.892	FINAL	18.8	—	60.00	-41.19	L1	GND

Table 7-14. AC Line Conducted Data with 11n Ch.6 (L1, with AC/DC Adaptor)

FCC ID: BCG-A3581 IC: 579C-A3581	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/1/2026 - 7/22/2026	EUT Type: Watch	Approved by: Technical Manager
Test Report S/N: 1C2604100028-01.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 65 of 67

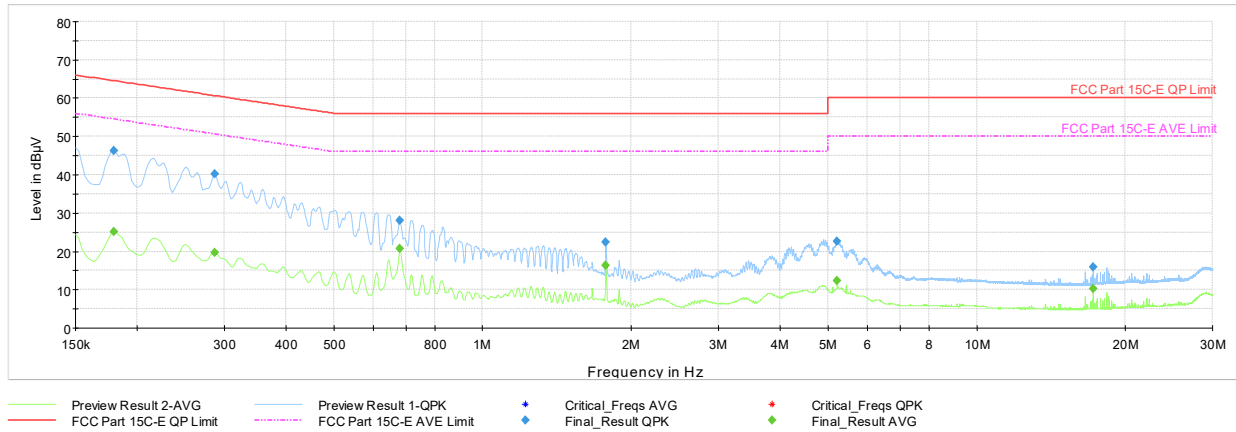

Plot 7-51. AC Line Conducted Plot with 11b Ch.6 (N, with AC/DC Adaptor)

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.179	FINAL	—	25.07	54.52	-29.45	N	GND
0.179	FINAL	46.3	—	64.52	-18.19	N	GND
0.287	FINAL	—	19.64	50.60	-30.97	N	GND
0.287	FINAL	40.1	—	60.60	-20.46	N	GND
0.681	FINAL	—	20.74	46.00	-25.26	N	GND
0.681	FINAL	28.1	—	56.00	-27.93	N	GND
1.777	FINAL	22.4	—	56.00	-33.59	N	GND
1.777	FINAL	—	16.25	46.00	-29.75	N	GND
5.222	FINAL	22.6	—	60.00	-37.41	N	GND
5.222	FINAL	—	12.43	50.00	-37.57	N	GND
17.223	FINAL	—	10.22	50.00	-39.78	N	GND
17.223	FINAL	16.0	—	60.00	-44.04	N	GND

Table 7-15. AC Line Conducted Data with 11b Ch.6 (N, with AC/DC Adaptor)

FCC ID: BCG-A3581 IC: 579C-A3581	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/1/2026 - 7/22/2026	EUT Type: Watch	Approved by: Technical Manager
Test Report S/N: 1C2604100028-01.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 66 of 67

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Apple Watch FCC ID: BCG-A3581, IC: 579C-A3581** is in compliance with Part 15 Subpart C (15.247) of the FCC Rules and RSS-247 of the Innovation, Science and Economic Development Canada Rules.

FCC ID: BCG-A3581 IC: 579C-A3581	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/1/2026 - 7/22/2026	EUT Type: Watch	Approved by: Technical Manager
Test Report S/N: 1C2604100028-01.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 67 of 67

V 12.0 03/03/2026

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.