

APPENDIX B: SAR DIPOLE VERIFICATION PLOTS

FCCID: BCG-A3582	RF EXPOSURE REPORT		Approved by: Technical Manager
DUT Type: Watch		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.	Appendix B

ELEMENT

DUT: Dipole 13.0 MHz; Type: CLA13 - SN1004

Communication System: UID: 0, CW; Frequency: 13.0 MHz
Medium: 30 Head; Medium parameters used:
 $f = 13.0$ MHz; $\text{cond} = 0.756$ S/m; $\text{perm} = 52.4$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 0 mm

Test Date: 07/11/2026; Ambient Temp: 23.2°C; Tissue Temp: 24.1°C

Probe: EX3DV4 - SN7782; ConvF:(18.49,15.42,16.82); Calibrated: 2025-09-15
Sensor-Surface: 1.4mm (All points)
Electronics: DAE4 Sn1646; Calibrated: 2025-09-10
Phantom: ELI V6.0; Serial: 2003
Measurement SW: DASY Module SAR V16.4.0.5005

13.0 MHz System Verification at 30.0 dBm (1000 mW)


Area Scan (40.0 x 90.0): Measurement grid: $dx=10.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 31.2): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 1.15 W/kg

SAR(1 g) = 0.559 W/kg; SAR(10 g) = 0.346 W/kg

Deviation (1 g) = -4.44%; Deviation (10 g) = -3.35%

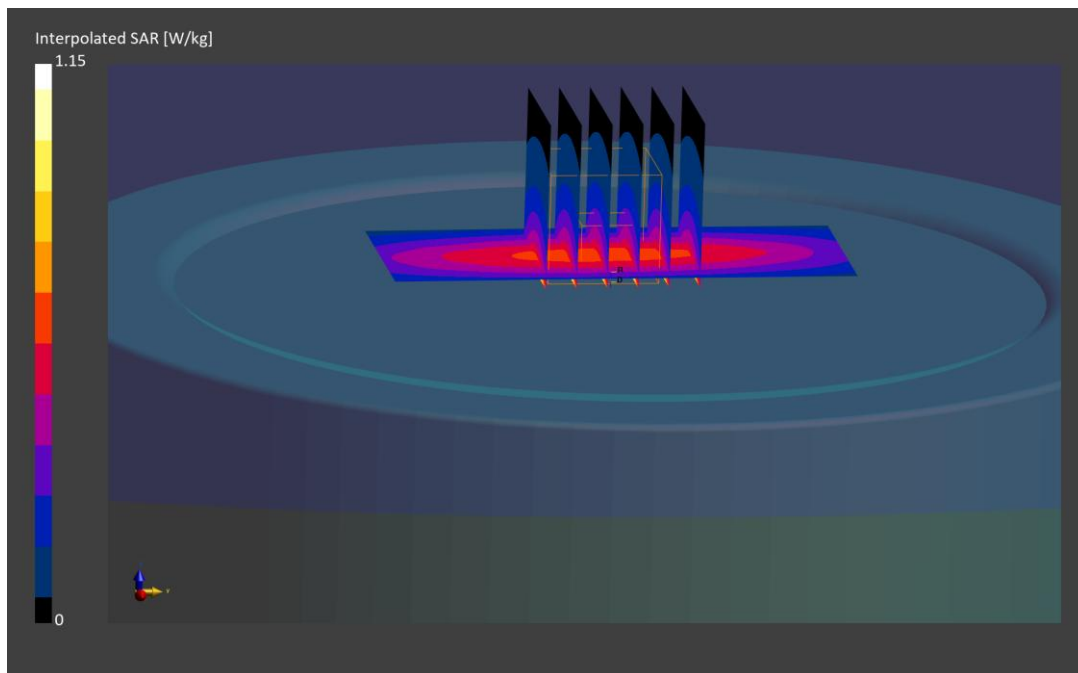

ELEMENT

DUT: Dipole 750.0 MHz; Type: D750V3 - SN1094

Communication System: UID: 0, CW; Frequency: 750.0 MHz
Medium: 750 Head; Medium parameters used:
 $f = 750.0$ MHz; $\text{cond} = 0.866$ S/m; $\text{perm} = 43.8$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 15 mm

Test Date: 07/02/2026; Ambient Temp: 24.2°C; Tissue Temp: 21.0°C

Probe: EX3DV4 - SN7427; ConvF:(8.61,9.7,9.61); Calibrated: 2026-02-12
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1402; Calibrated: 2026-02-06
Phantom: Twin-SAM V5.0; Serial: 1647
Measurement SW: DASY Module SAR V16.4.0.5005

750.0 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (40.0 x 90.0): Measurement grid: $dx=10.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 31.2): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 2.63 W/kg

SAR(1 g) = 1.74 W/kg; SAR(10 g) = 1.15 W/kg

Deviation (1 g) = 0.23%; Deviation (10 g) = 2.50%

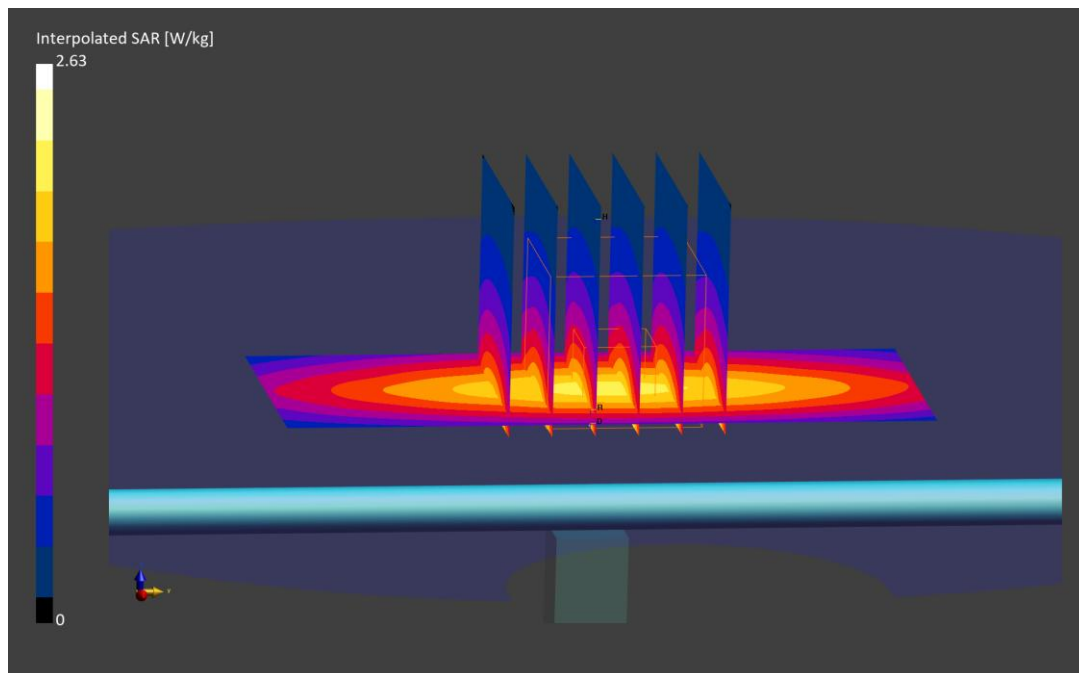

ELEMENT

DUT: Dipole 750.0 MHz; Type: D750V3 - SN1094

Communication System: UID: 0, CW; Frequency: 750.0 MHz
Medium: 750 Head; Medium parameters used:
 $f = 750.0$ MHz; $\text{cond} = 0.885$ S/m; $\text{perm} = 41.5$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 15 mm

Test Date: 07/06/2026; Ambient Temp: 21.1°C; Tissue Temp: 23.0°C

Probe: EX3DV4 - SN7782; ConvF:(9.41,8.15,8.19); Calibrated: 2025-09-15
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1646; Calibrated: 2025-09-10
Phantom: Twin-SAM V4.0; Serial: 1598
Measurement SW: DASY Module SAR V16.4.0.5005

750.0 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (40.0 x 90.0): Measurement grid: $dx=10.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 31.2): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 2.78 W/kg

SAR(1 g) = 1.75 W/kg; SAR(10 g) = 1.18 W/kg

Deviation (1 g) = 0.81%; Deviation (10 g) = 5.17%

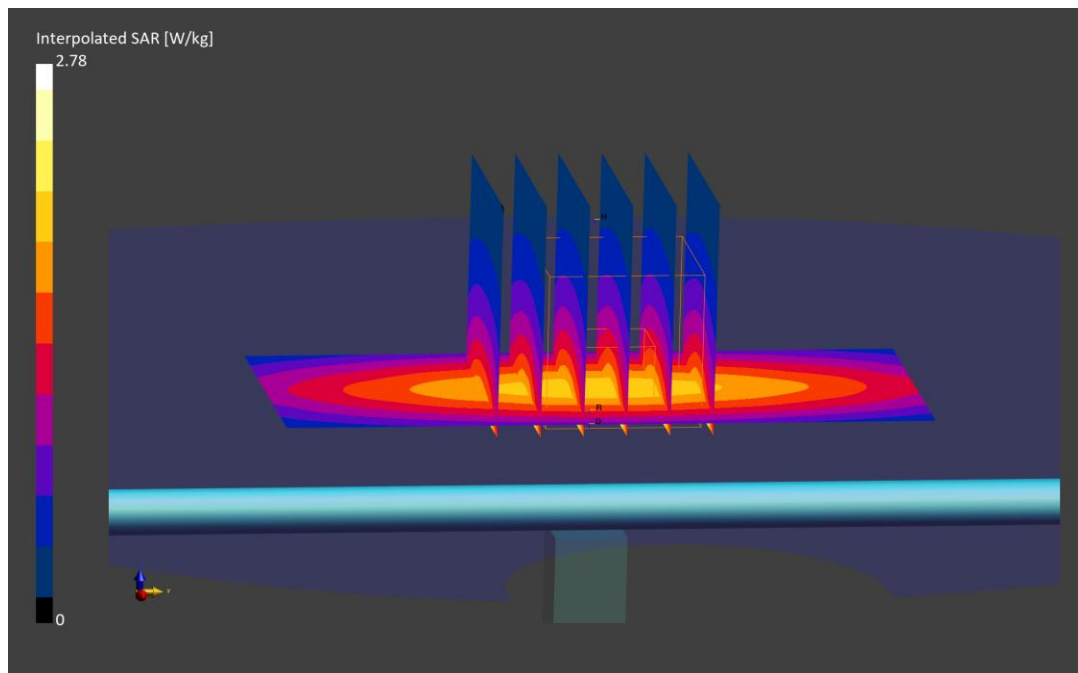

ELEMENT

DUT: Dipole 750.0 MHz; Type: D750V3 - SN1094

Communication System: UID: 0, CW; Frequency: 750.0 MHz
Medium: 750 Head; Medium parameters used:
 $f = 750.0$ MHz; $\text{cond} = 0.867$ S/m; $\text{perm} = 40.3$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 15 mm

Test Date: 07/08/2026; Ambient Temp: 21.9°C; Tissue Temp: 23.5°C

Probe: EX3DV4 - SN7782; ConvF:(9.41,8.15,8.19); Calibrated: 2025-09-15
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1646; Calibrated: 2025-09-10
Phantom: Twin-SAM V4.0; Serial: 1598
Measurement SW: DASY Module SAR V16.4.0.5005

750.0 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (40.0 x 90.0): Measurement grid: $dx=10.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 31.2): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 2.47 W/kg

SAR(1 g) = 1.60 W/kg; SAR(10 g) = 1.06 W/kg

Deviation (1 g) = -7.83%; Deviation (10 g) = -5.53%

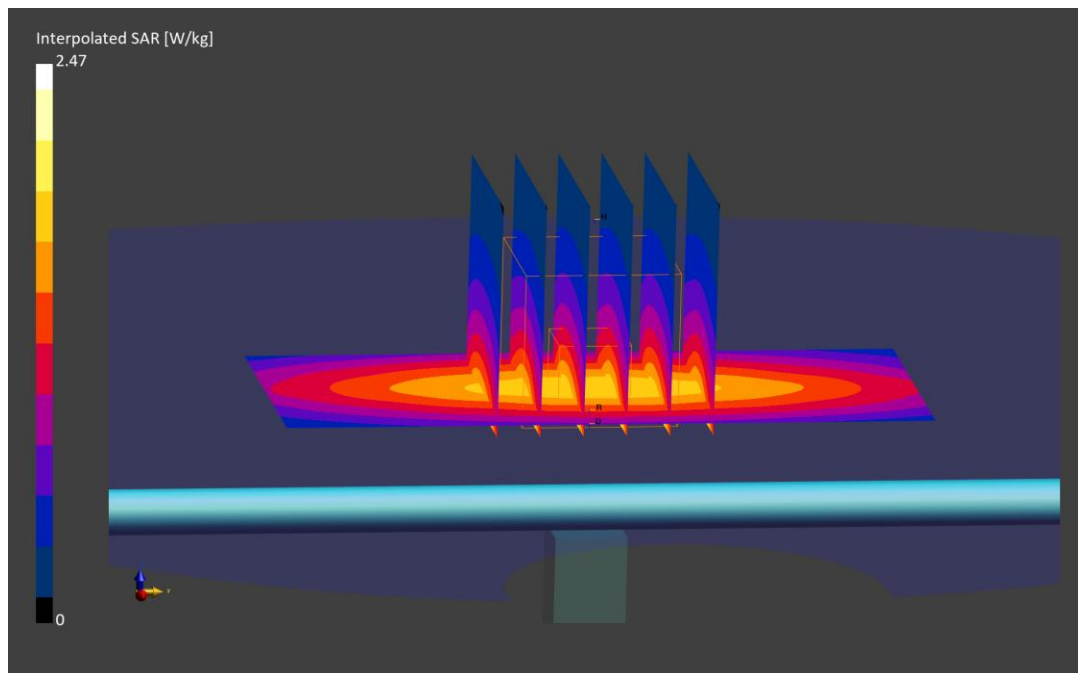

ELEMENT

DUT: Dipole 750.0 MHz; Type: D750V3 - SN1097

Communication System: UID: 0, CW; Frequency: 750.0 MHz
Medium: 750 Head; Medium parameters used:
 $f = 750.0$ MHz; $\text{cond} = 0.914$ S/m; $\text{perm} = 40.4$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 15 mm

Test Date: 07/08/2026; Ambient Temp: 20.6°C; Tissue Temp: 23.0°C

Probe: EX3DV4 - SN7308; ConvF:(9.33,10.49,9.55); Calibrated: 2026-02-11
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn501; Calibrated: 2026-04-13
Phantom: Twin-SAM V8.0; Serial: 1357
Measurement SW: DASY Module SAR V16.4.0.5005

750.0 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (40.0 x 90.0): Measurement grid: $dx=10.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 31.2): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 2.62 W/kg

SAR(1 g) = 1.73 W/kg; SAR(10 g) = 1.15 W/kg

Deviation (1 g) = 4.59%; Deviation (10 g) = 6.88%

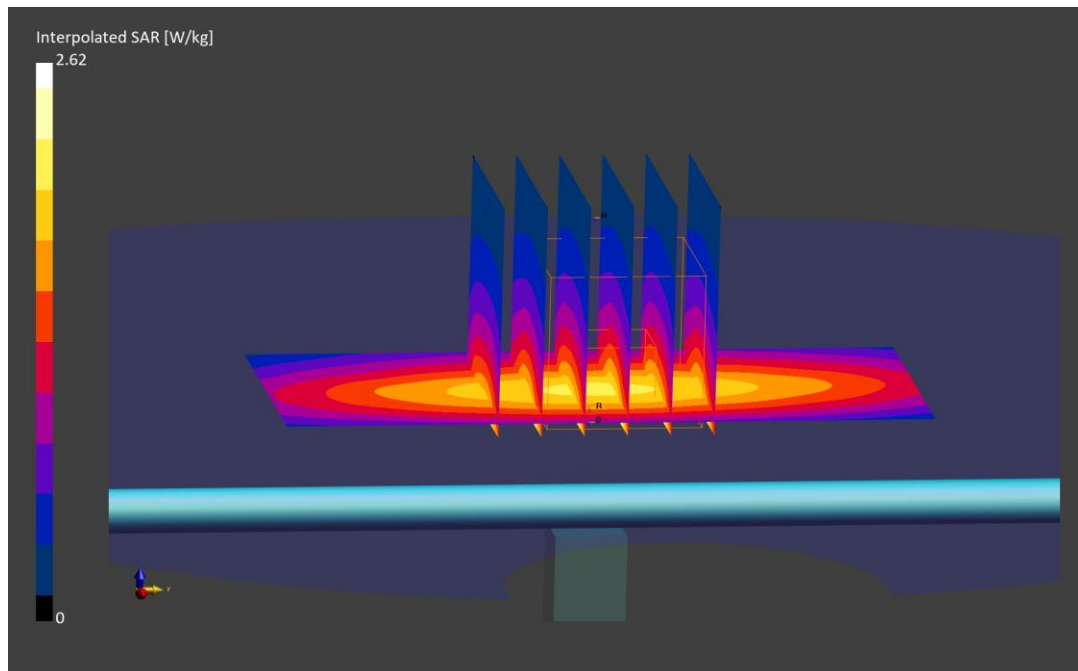

ELEMENT

DUT: Dipole 750.0 MHz; Type: D750V3 - SN1097

Communication System: UID: 0, CW; Frequency: 750.0 MHz
Medium: 750 Head; Medium parameters used:
 $f = 750.0$ MHz; $\text{cond} = 0.873$ S/m; $\text{perm} = 40.0$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 15 mm

Test Date: 07/10/2026; Ambient Temp: 22.7°C; Tissue Temp: 23.0°C

Probe: EX3DV4 - SN7308; ConvF:(9.33,10.49,9.55); Calibrated: 2026-02-11
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn501; Calibrated: 2026-04-13
Phantom: Twin-SAM V8.0; Serial: 1357
Measurement SW: DASY Module SAR V16.4.0.5005

750.0 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (40.0 x 90.0): Measurement grid: $dx=10.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 31.2): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 2.64 W/kg

SAR(1 g) = 1.69 W/kg; SAR(10 g) = 1.13 W/kg

Deviation (1 g) = 2.18%; Deviation (10 g) = 5.02%

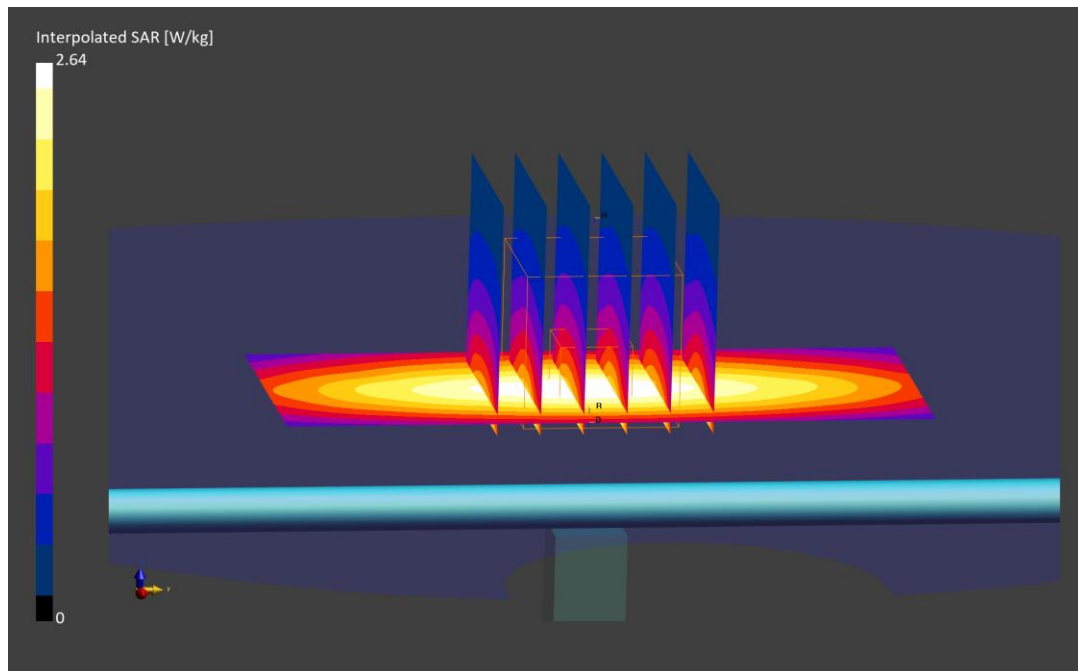

ELEMENT

DUT: Dipole 750.0 MHz; Type: D750V3 - SN1097

Communication System: UID: 0, CW; Frequency: 750.0 MHz
Medium: 750 Head; Medium parameters used:
 $f = 750.0$ MHz; $\text{cond} = 0.886$ S/m; $\text{perm} = 40.6$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 15 mm

Test Date: 07/12/2026; Ambient Temp: 20.7°C; Tissue Temp: 23.0°C

Probe: EX3DV4 - SN7308; ConvF:(9.33,10.49,9.55); Calibrated: 2026-02-11
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn501; Calibrated: 2026-04-13
Phantom: Twin-SAM V8.0; Serial: 1357
Measurement SW: DASY Module SAR V16.4.0.5005

750.0 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (40.0 x 90.0): Measurement grid: $dx=10.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 31.2): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 2.47 W/kg

SAR(1 g) = 1.61 W/kg; SAR(10 g) = 1.07 W/kg

Deviation (1 g) = -2.66%; Deviation (10 g) = -0.56%

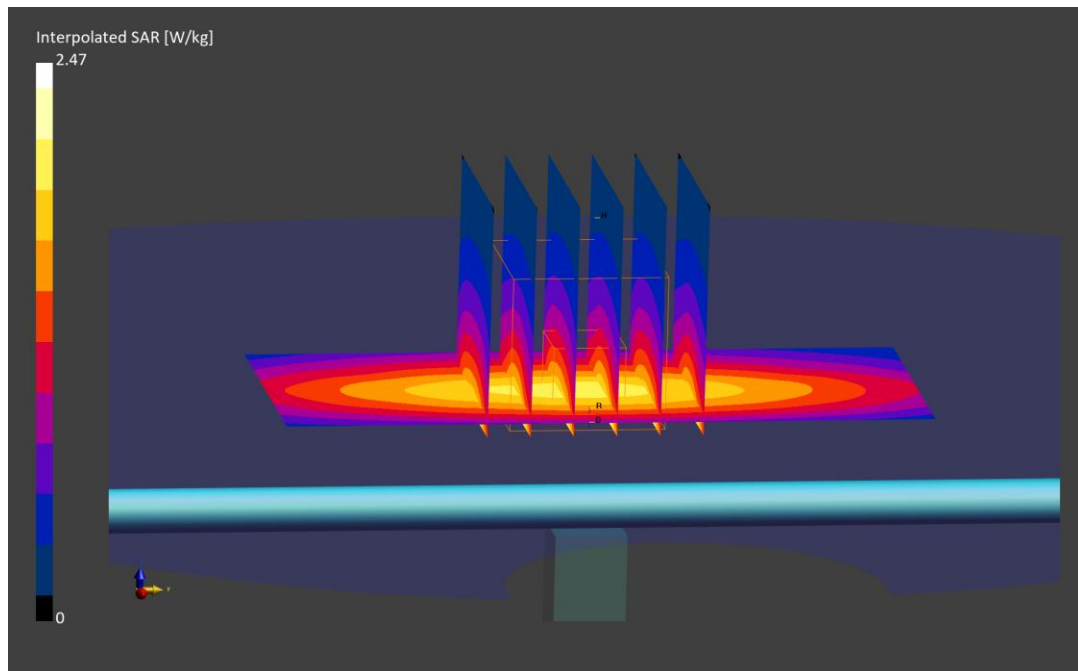

ELEMENT

DUT: Dipole 750.0 MHz; Type: D750V3 - SN1094

Communication System: UID: 0, CW; Frequency: 750.0 MHz
Medium: 750 Head; Medium parameters used:
 $f = 750.0 \text{ MHz}$; $\text{cond} = 0.879 \text{ S/m}$; $\text{perm} = 40.1$; $\text{density} = 1000 \text{ kg/m}^3$
Phantom Section: Flat; Space: 15 mm

Test Date: 07/13/2026; Ambient Temp: 20.8°C; Tissue Temp: 22.5°C

Probe: EX3DV4 - SN7427; ConvF:(8.61,9.7,9.61); Calibrated: 2026-02-12
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1402; Calibrated: 2026-02-06
Phantom: Twin-SAM V5.0; Serial: 1647
Measurement SW: DASY Module SAR V16.4.0.5005

750.0 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (40.0 x 90.0): Measurement grid: $dx=10.0 \text{ mm}$, $dy=15.0 \text{ mm}$

Zoom Scan (30.0 x 30.0 x 31.2): Measurement grid: $dx=6.0 \text{ mm}$, $dy=6.0 \text{ mm}$, $dz=1.5 \text{ mm}$; Graded Ratio: 1.5

Peak SAR (extrapolated) = 2.49 W/kg

SAR(1 g) = 1.62 W/kg; SAR(10 g) = 1.07 W/kg

Deviation (1 g) = -6.68%; Deviation (10 g) = -4.63%

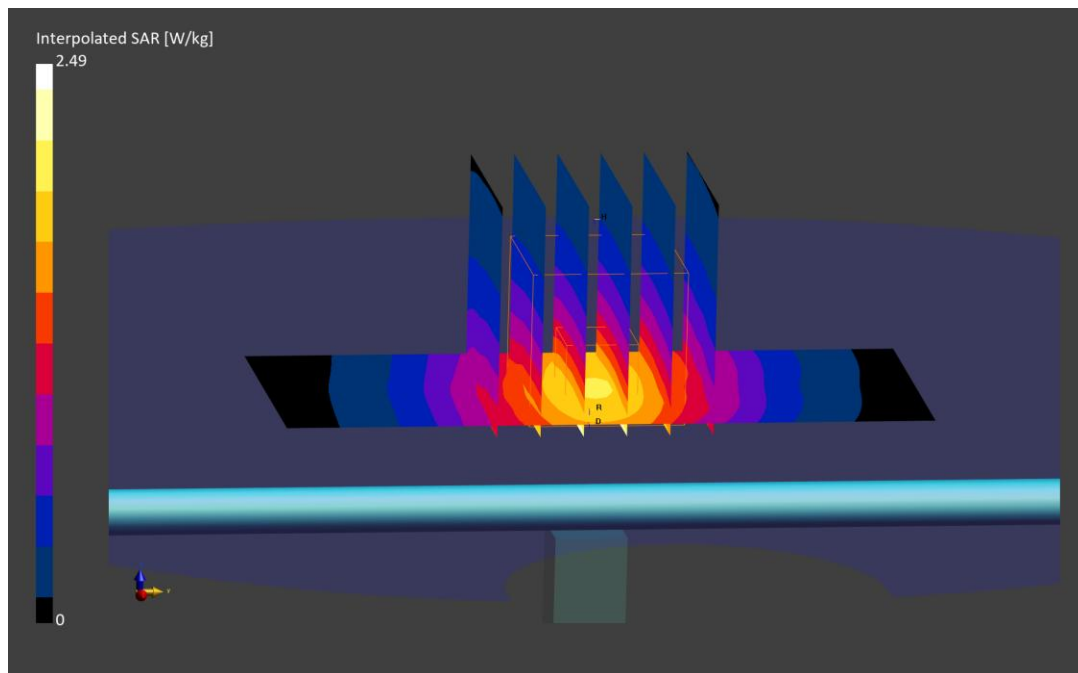

ELEMENT

DUT: Dipole 750.0 MHz; Type: D750V3 - SN1097

Communication System: UID: 0, CW; Frequency: 750.0 MHz
Medium: 750 Head; Medium parameters used:
 $f = 750.0$ MHz; $\text{cond} = 0.870$ S/m; $\text{perm} = 40.3$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 15 mm

Test Date: 07/21/2026; Ambient Temp: 21.7°C; Tissue Temp: 23.0°C

Probe: EX3DV4 - SN7308; ConvF:(9.33,10.49,9.55); Calibrated: 2026-02-11
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn501; Calibrated: 2026-04-13
Phantom: Twin-SAM V8.0; Serial: 1357
Measurement SW: DASY Module SAR V16.4.0.5005

750.0 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (40.0 x 90.0): Measurement grid: $dx=10.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 31.2): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 2.44 W/kg

SAR(1 g) = 1.56 W/kg; SAR(10 g) = 1.05 W/kg

Deviation (1 g) = -5.68%; Deviation (10 g) = -2.42%

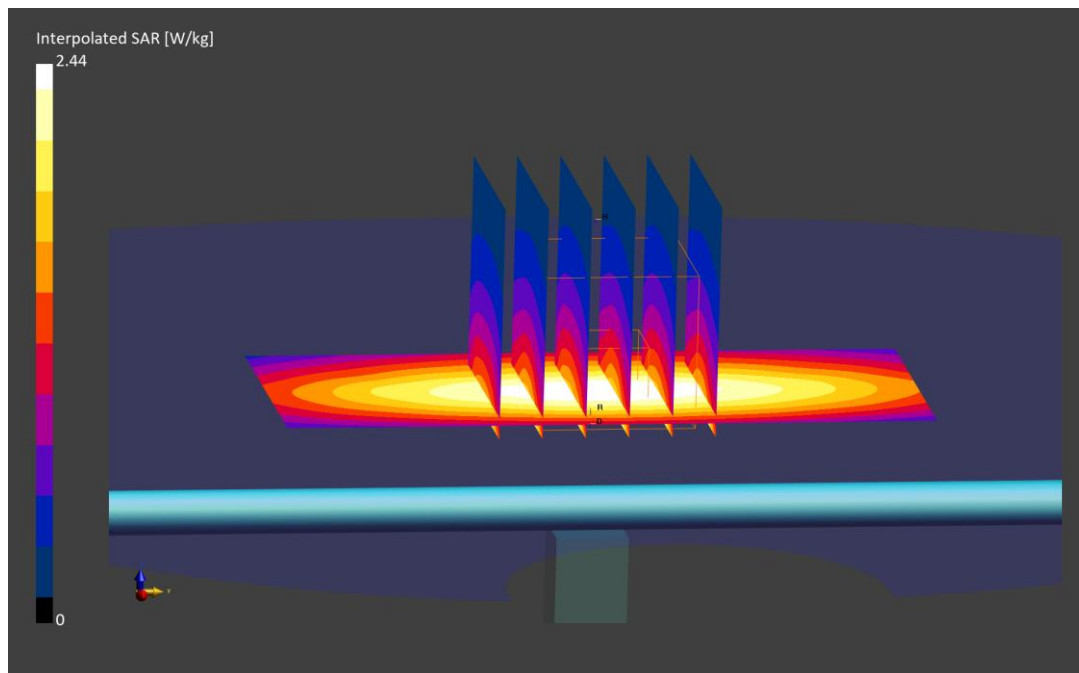

ELEMENT

DUT: Dipole 750.0 MHz; Type: D750V3 - SN1097

Communication System: UID: 0, CW; Frequency: 750.0 MHz
Medium: 750 Head; Medium parameters used:
 $f = 750.0 \text{ MHz}$; $\text{cond} = 0.886 \text{ S/m}$; $\text{perm} = 40.8$; $\text{density} = 1000 \text{ kg/m}^3$
Phantom Section: Flat; Space: 15 mm

Test Date: 07/24/2026; Ambient Temp: 23.0°C; Tissue Temp: 23.0°C

Probe: EX3DV4 - SN7308; ConvF:(9.33,10.49,9.55); Calibrated: 2026-02-11
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn501; Calibrated: 2026-04-13
Phantom: Twin-SAM V8.0; Serial: 1357
Measurement SW: DASY Module SAR V16.4.0.5005

750.0 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (40.0 x 90.0): Measurement grid: $dx=10.0 \text{ mm}$, $dy=15.0 \text{ mm}$

Zoom Scan (30.0 x 30.0 x 31.2): Measurement grid: $dx=6.0 \text{ mm}$, $dy=6.0 \text{ mm}$, $dz=1.5 \text{ mm}$; Graded Ratio: 1.5

Peak SAR (extrapolated) = 2.44 W/kg

SAR(1 g) = 1.65 W/kg; SAR(10 g) = 1.12 W/kg

Deviation (1 g) = -0.24%; Deviation (10 g) = 4.09%

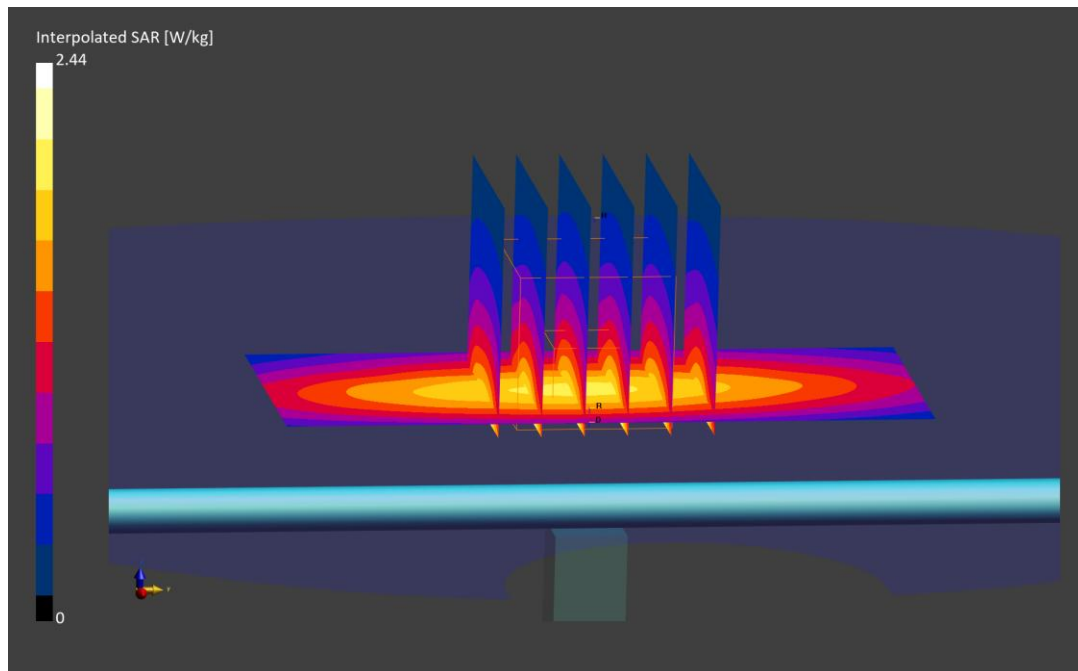

ELEMENT

DUT: Dipole 835.0 MHz; Type: D835V2 - SN4d040

Communication System: UID: 0, CW; Frequency: 835.0 MHz
Medium: 835 Head; Medium parameters used:
 $f = 835.0$ MHz; $\text{cond} = 0.879$ S/m; $\text{perm} = 39.8$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 15 mm

Test Date: 06/30/2026; Ambient Temp: 23.2°C; Tissue Temp: 23.7°C

Probe: EX3DV4 - SN7421; ConvF:(8.99,9.38,9.48); Calibrated: 2026-03-10
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn604; Calibrated: 2026-03-09
Phantom: Twin-SAM V8.0; Serial: 2029
Measurement SW: DASY Module SAR V16.4.0.5005

835.0 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (40.0 x 90.0): Measurement grid: $dx=10.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 31.2): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 2.83 W/kg

SAR(1 g) = 1.87 W/kg; SAR(10 g) = 1.25 W/kg

Deviation (1 g) = -2.50%; Deviation (10 g) = 0.00%

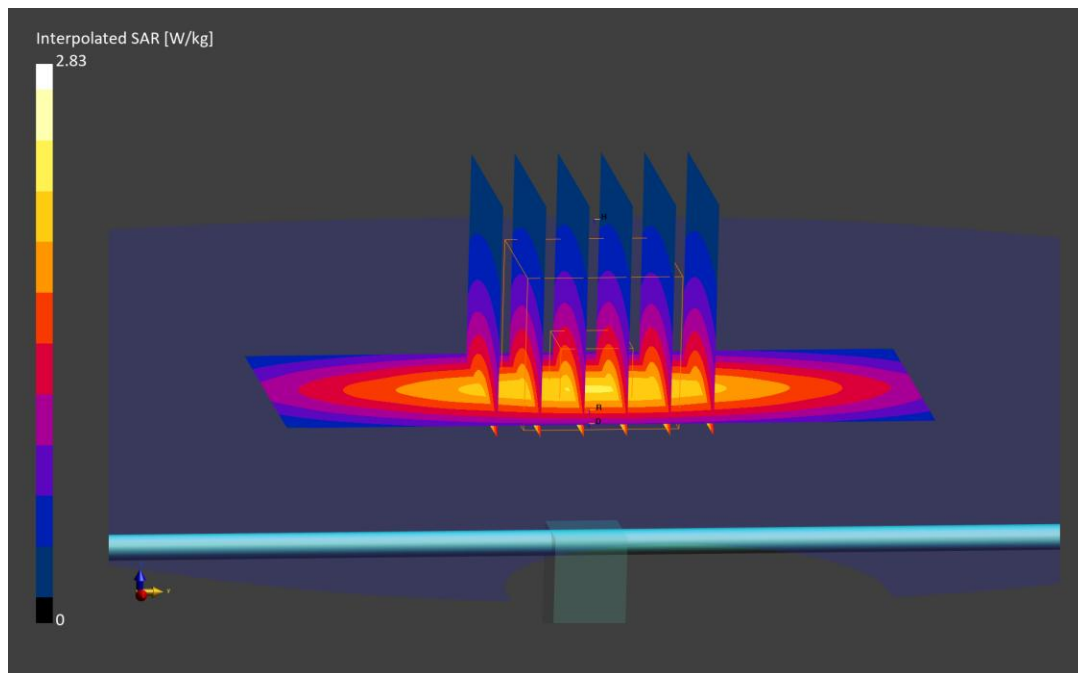

ELEMENT

DUT: Dipole 835.0 MHz; Type: D835V2 - SN4d108

Communication System: UID: 0, CW; Frequency: 835.0 MHz
Medium: 835 Head; Medium parameters used:
 $f = 835.0$ MHz; $\text{cond} = 0.890$ S/m; $\text{perm} = 40.1$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 15 mm

Test Date: 06/30/2026; Ambient Temp: 22.8°C; Tissue Temp: 21.0°C

Probe: EX3DV4 - SN7639; ConvF:(9.82,9.85,10.5); Calibrated: 2025-09-12
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1684; Calibrated: 2025-09-10
Phantom: Twin-SAM V5.0; Serial: 1648
Measurement SW: DASY Module SAR V16.4.0.5005

835.0 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (40.0 x 90.0): Measurement grid: $dx=10.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 31.2): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 3.17 W/kg

SAR(1 g) = 1.96 W/kg; SAR(10 g) = 1.28 W/kg

Deviation (1 g) = 4.26%; Deviation (10 g) = 5.79%

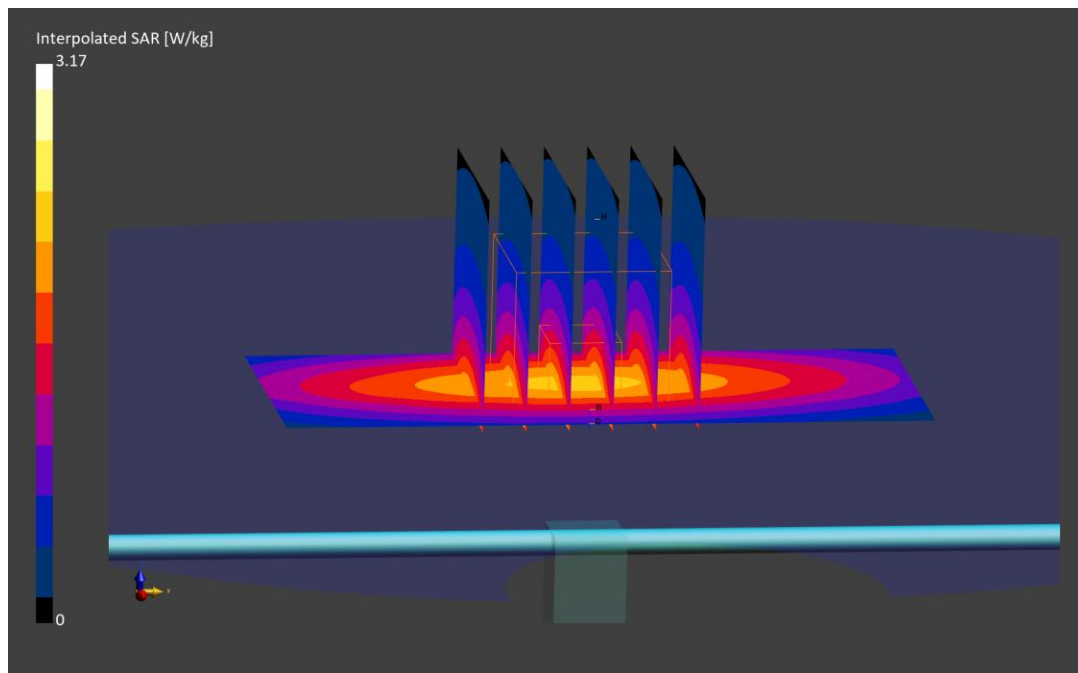

ELEMENT

DUT: Dipole 835.0 MHz; Type: D835V2 - SN4d040

Communication System: UID: 0, CW; Frequency: 835.0 MHz
 Medium: 835 Head; Medium parameters used:
 $f = 835.0 \text{ MHz}$; $\text{cond} = 0.872 \text{ S/m}$; $\text{perm} = 43.0$; $\text{density} = 1000 \text{ kg/m}^3$
 Phantom Section: Flat; Space: 15 mm

Test Date: 07/06/2026; Ambient Temp: 21.1°C; Tissue Temp: 23.1°C

Probe: EX3DV4 - SN7421; ConvF:(8.99,9.38,9.48); Calibrated: 2026-03-10
 Sensor-Surface: 1.4mm (VMS + 6p)
 Electronics: DAE4 Sn604; Calibrated: 2026-03-09
 Phantom: Twin-SAM V8.0; Serial: 2029
 Measurement SW: DASY Module SAR V16.4.0.5005

835.0 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (40.0 x 90.0): Measurement grid: $dx=10.0 \text{ mm}$, $dy=15.0 \text{ mm}$

Zoom Scan (30.0 x 30.0 x 31.2): Measurement grid: $dx=6.0 \text{ mm}$, $dy=6.0 \text{ mm}$, $dz=1.5 \text{ mm}$; Graded Ratio: 1.5

Peak SAR (extrapolated) = 2.86 W/kg

SAR(1 g) = 1.91 W/kg; SAR(10 g) = 1.28 W/kg

Deviation (1 g) = -0.42%; Deviation (10 g) = 2.40%

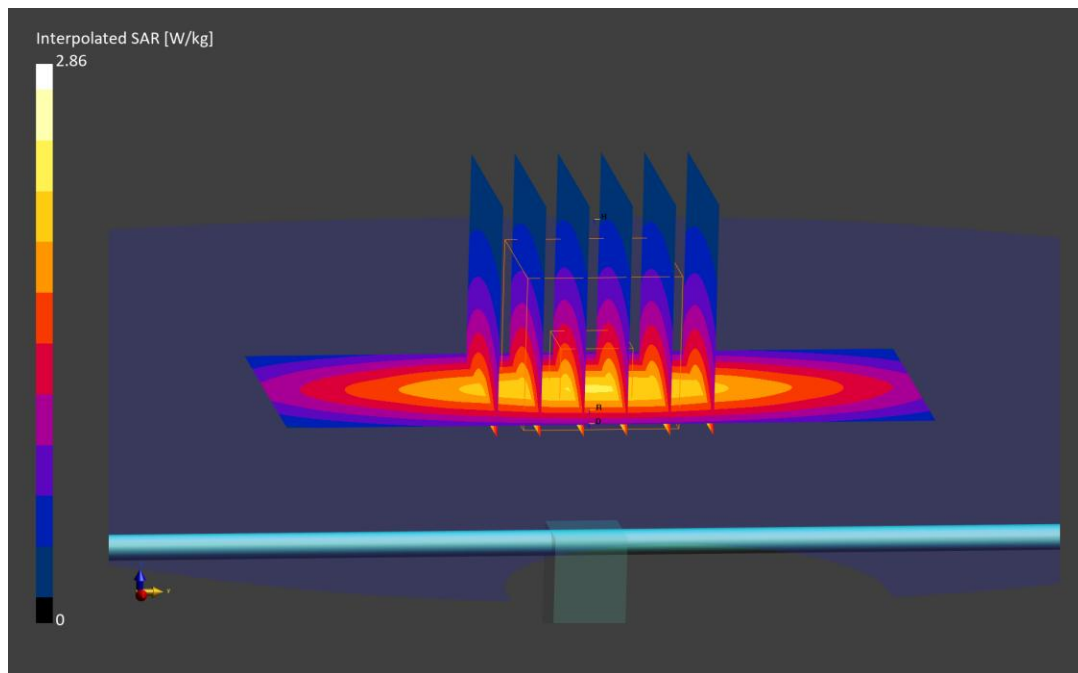

ELEMENT

DUT: Dipole 835.0 MHz; Type: D835V2 - SN4d108

Communication System: UID: 0, CW; Frequency: 835.0 MHz
Medium: 835 Head; Medium parameters used:
 $f = 835.0$ MHz; $\text{cond} = 0.907$ S/m; $\text{perm} = 42.8$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 15 mm

Test Date: 07/08/2026; Ambient Temp: 20.0°C; Tissue Temp: 20.0°C

Probe: EX3DV4 - SN7639; ConvF:(9.82,9.85,10.5); Calibrated: 2025-09-12
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1684; Calibrated: 2025-09-10
Phantom: Twin-SAM V5.0; Serial: 1648
Measurement SW: DASY Module SAR V16.4.0.5005

835.0 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (40.0 x 90.0): Measurement grid: $dx=10.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 31.2): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 2.90 W/kg

SAR(1 g) = 1.88 W/kg; SAR(10 g) = 1.24 W/kg

Deviation (1 g) = 0.00%; Deviation (10 g) = 2.48%

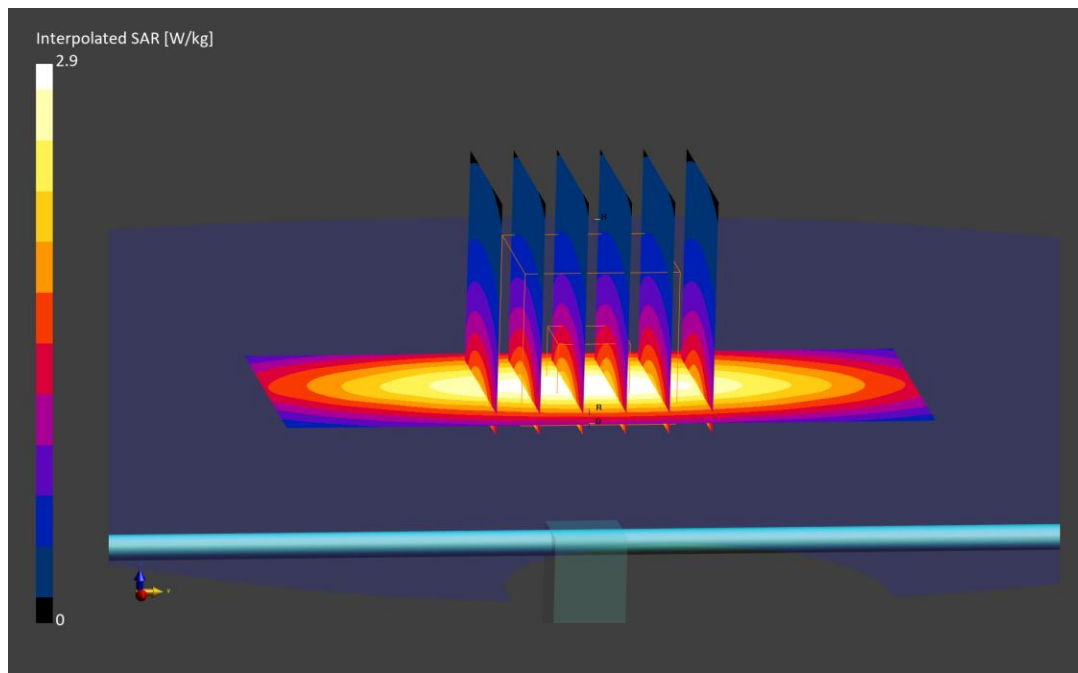

ELEMENT

DUT: Dipole 835.0 MHz; Type: D835V2 - SN4d040

Communication System: UID: 0, CW; Frequency: 835.0 MHz
 Medium: 835 Head; Medium parameters used:
 $f = 835.0 \text{ MHz}$; $\text{cond} = 0.877 \text{ S/m}$; $\text{perm} = 40.2$; $\text{density} = 1000 \text{ kg/m}^3$
 Phantom Section: Flat; Space: 15 mm

Test Date: 07/16/2026; Ambient Temp: 24.7°C; Tissue Temp: 24.9°C

Probe: EX3DV4 - SN7421; ConvF:(8.99,9.38,9.48); Calibrated: 2026-03-10
 Sensor-Surface: 1.4mm (VMS + 6p)
 Electronics: DAE4 Sn604; Calibrated: 2026-03-09
 Phantom: Twin-SAM V8.0; Serial: 2029
 Measurement SW: DASY Module SAR V16.4.0.5005

835.0 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (40.0 x 90.0): Measurement grid: $dx=10.0 \text{ mm}$, $dy=15.0 \text{ mm}$

Zoom Scan (30.0 x 30.0 x 31.2): Measurement grid: $dx=6.0 \text{ mm}$, $dy=6.0 \text{ mm}$, $dz=1.5 \text{ mm}$; Graded Ratio: 1.5

Peak SAR (extrapolated) = 2.94 W/kg

SAR(1 g) = 1.96 W/kg; SAR(10 g) = 1.31 W/kg

Deviation (1 g) = 2.19%; Deviation (10 g) = 4.80%

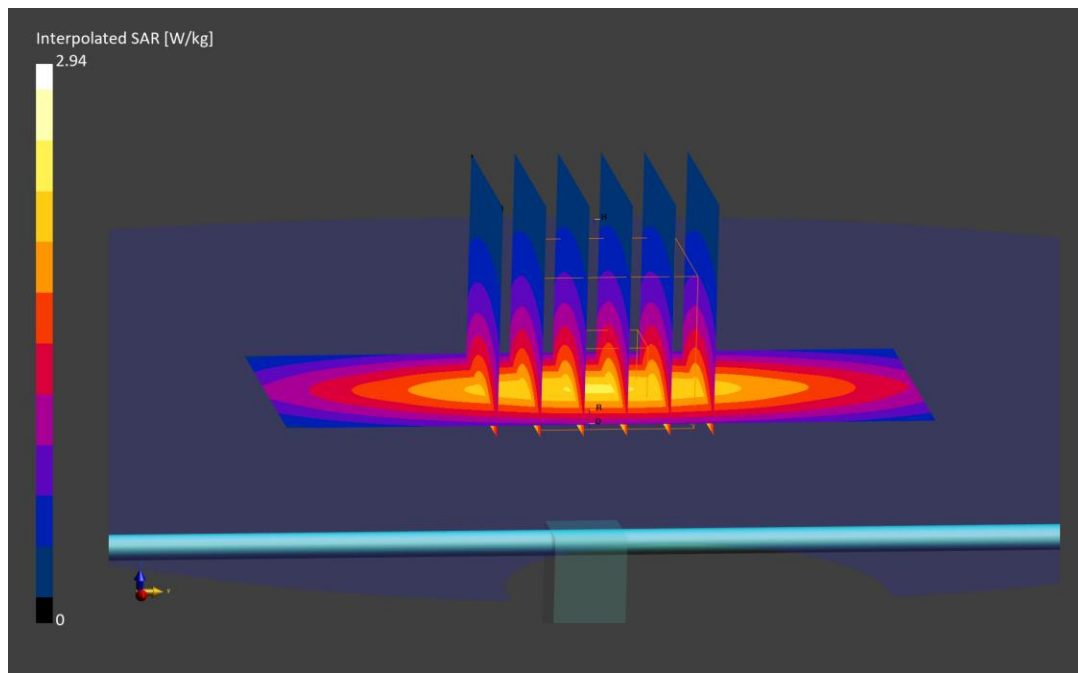

ELEMENT

DUT: Dipole 1750.0 MHz; Type: D1750V2 - SN1040

Communication System: UID: 0, CW; Frequency: 1750.0 MHz

Medium: 1750 Head; Medium parameters used:

$f = 1750.0$ MHz; $\text{cond} = 1.32$ S/m; $\text{perm} = 39.1$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 10 mm

Test Date: 06/26/2026; Ambient Temp: 24.1°C; Tissue Temp: 23.0°C

Probe: EX3DV4 - SN3746; ConvF:(7.53,7.38,7.88); Calibrated: 2025-10-10

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1237; Calibrated: 2025-10-14

Phantom: Twin-SAM V5.0; Serial: 1692

Measurement SW: DASY Module SAR V16.4.0.5005

1750.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 90.0): Measurement grid: $dx=10.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 31.2): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 6.43 W/kg

SAR(1 g) = 3.58 W/kg; SAR(10 g) = 1.91 W/kg

Deviation (1 g) = -1.38%; Deviation (10 g) = -1.04%

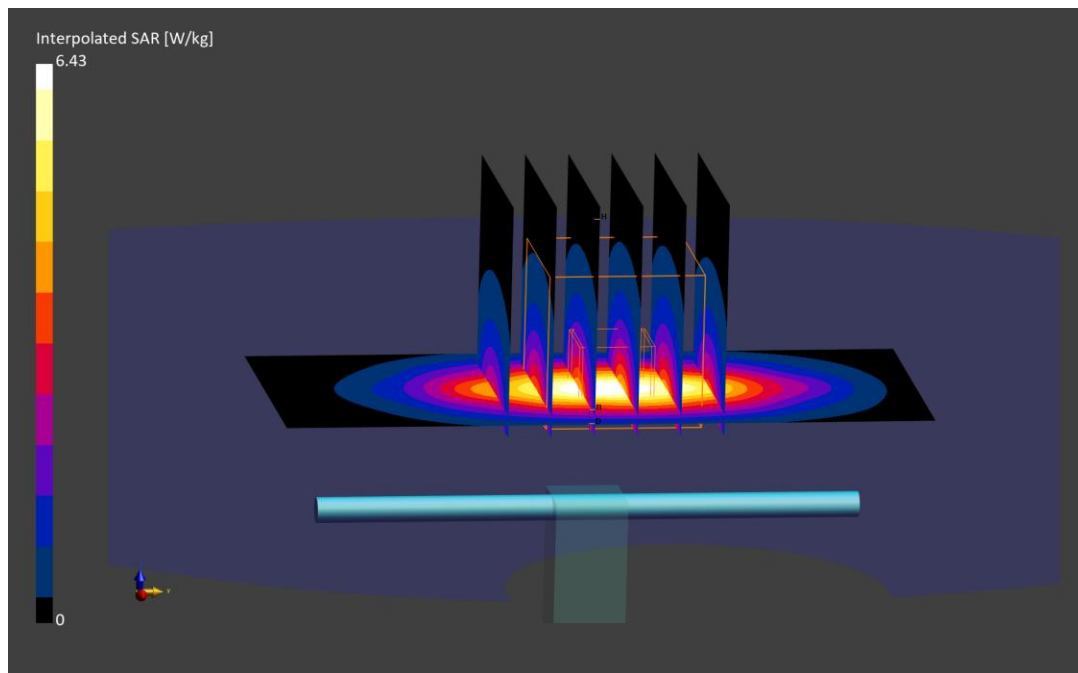

ELEMENT

DUT: Dipole 1750.0 MHz; Type: D1750V2 - SN1040

Communication System: UID: 0, CW; Frequency: 1750.0 MHz

Medium: 1750 Head; Medium parameters used:

$f = 1750.0$ MHz; $\text{cond} = 1.32$ S/m; $\text{perm} = 39.8$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 10 mm

Test Date: 07/06/2026; Ambient Temp: 21.9°C; Tissue Temp: 21.2°C

Probe: EX3DV4 - SN3746; ConvF:(7.53,7.38,7.88); Calibrated: 2025-10-10

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1237; Calibrated: 2025-10-14

Phantom: Twin-SAM V5.0; Serial: 1692

Measurement SW: DASY Module SAR V16.4.0.5005

1750.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 90.0): Measurement grid: $dx=10.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 31.2): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 6.48 W/kg

SAR(1 g) = 3.56 W/kg; SAR(10 g) = 1.90 W/kg

Deviation (1 g) = -1.93%; Deviation (10 g) = -1.55%

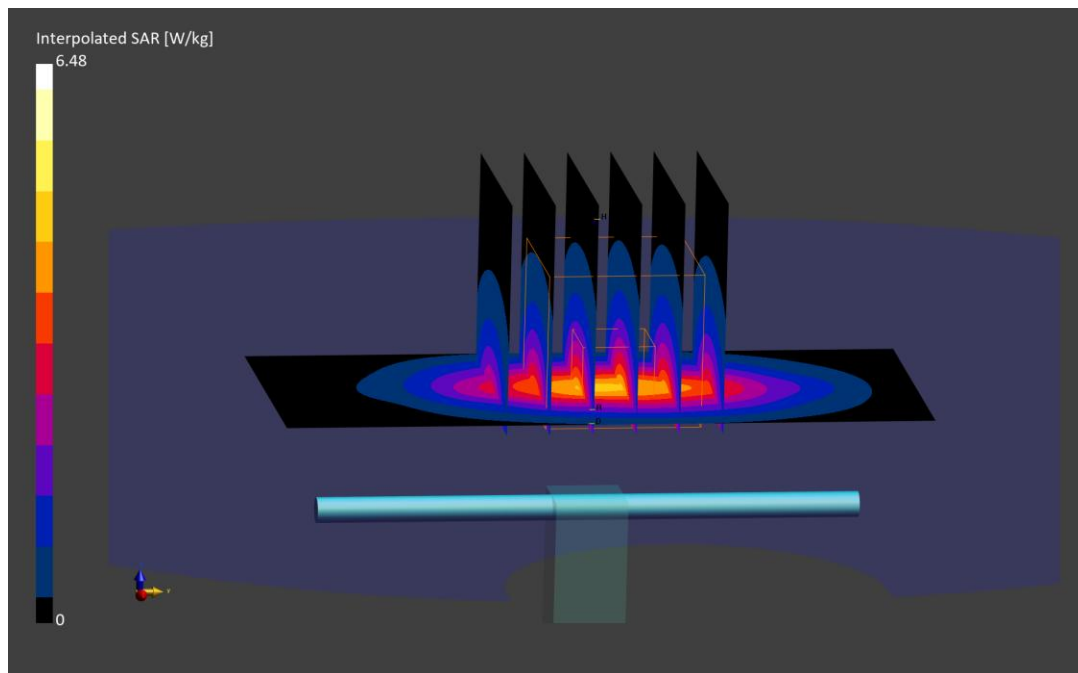

ELEMENT

DUT: Dipole 1750.0 MHz; Type: D1750V2 - SN1083

Communication System: UID: 0, CW; Frequency: 1750.0 MHz

Medium: 1750 Head; Medium parameters used:

$f = 1750.0$ MHz; $\text{cond} = 1.39$ S/m; $\text{perm} = 39.7$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 10 mm

Test Date: 07/24/2026; Ambient Temp: 22.8°C; Tissue Temp: 21.0°C

Probe: EX3DV4 - SN7499; ConvF:(7.73,7.97,8.23); Calibrated: 2026-02-12

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1465; Calibrated: 2026-01-12

Phantom: Twin-SAM V8.0; Serial: 1935

Measurement SW: DASY Module SAR V16.4.0.5005

1750.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 90.0): Measurement grid: $dx=10.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 31.2): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 6.48 W/kg

SAR(1 g) = 3.63 W/kg; SAR(10 g) = 1.93 W/kg

Deviation (1 g) = -0.55%; Deviation (10 g) = -0.52%

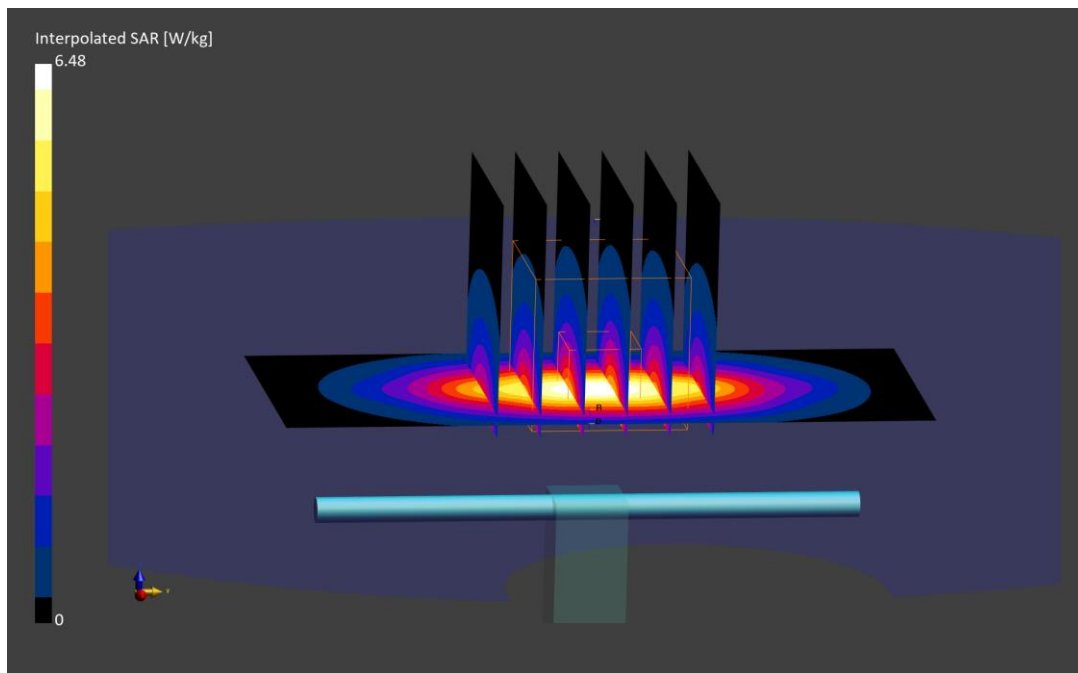

ELEMENT

DUT: Dipole 1900.0 MHz; Type: D1900V2 - SN5d181

Communication System: UID: 0, CW; Frequency: 1900.0 MHz

Medium: 1900 Head; Medium parameters used:

$f = 1900.0$ MHz; $\text{cond} = 1.41$ S/m; $\text{perm} = 39.1$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 10 mm

Test Date: 06/19/2026; Ambient Temp: 22.1°C; Tissue Temp: 22.2°C

Probe: EX3DV4 - SN7499; ConvF:(7.39,7.62,7.87); Calibrated: 2026-02-12

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1465; Calibrated: 2026-01-12

Phantom: Twin-SAM V8.0; Serial: 1935

Measurement SW: DASY Module SAR V16.4.0.5005

1900.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 90.0): Measurement grid: $dx=10.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 31.2): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 7.30 W/kg

SAR(1 g) = 4.05 W/kg; SAR(10 g) = 2.11 W/kg

Deviation (1 g) = 1.50%; Deviation (10 g) = 0.00%

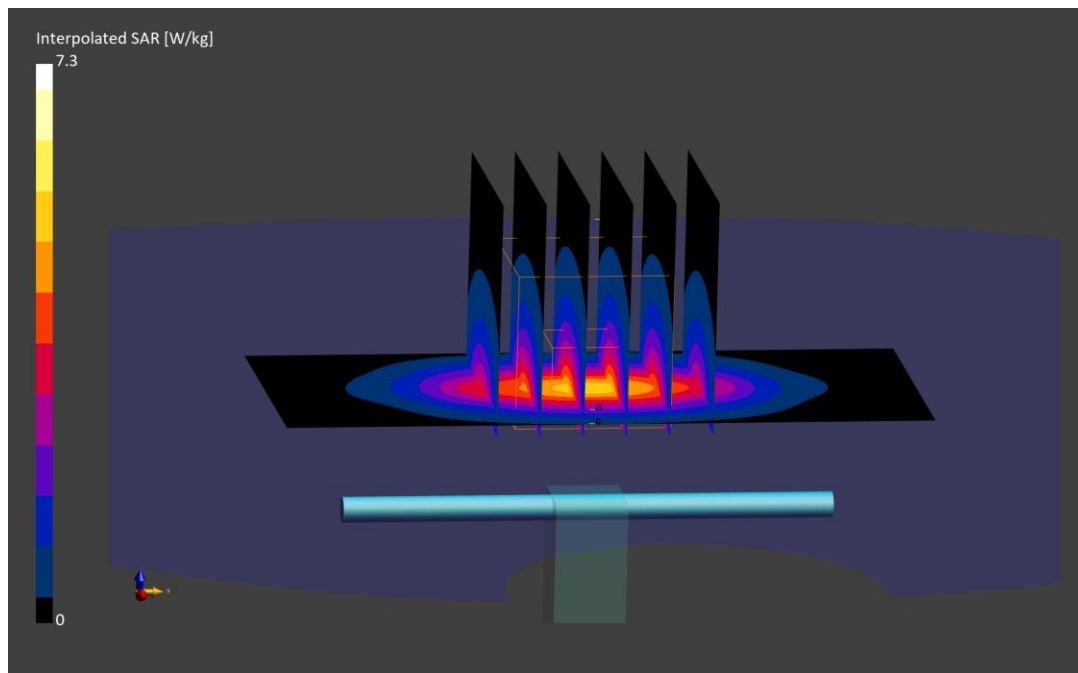

ELEMENT

DUT: Dipole 1900.0 MHz; Type: D1900V2 - SN5d181

Communication System: UID: 0, CW; Frequency: 1900.0 MHz

Medium: 1900 Head; Medium parameters used:

$f = 1900.0$ MHz; $\text{cond} = 1.44$ S/m; $\text{perm} = 39.1$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 10 mm

Test Date: 06/22/2026; Ambient Temp: 20.7°C; Tissue Temp: 20.0°C

Probe: EX3DV4 - SN7499; ConvF:(7.39,7.62,7.87); Calibrated: 2026-02-12

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1465; Calibrated: 2026-01-12

Phantom: Twin-SAM V8.0; Serial: 1935

Measurement SW: DASY Module SAR V16.4.0.5005

1900.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 90.0): Measurement grid: $dx=10.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 31.2): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 7.80 W/kg

SAR(1 g) = 4.16 W/kg; SAR(10 g) = 2.13 W/kg

Deviation (1 g) = 4.26%; Deviation (10 g) = 0.95%

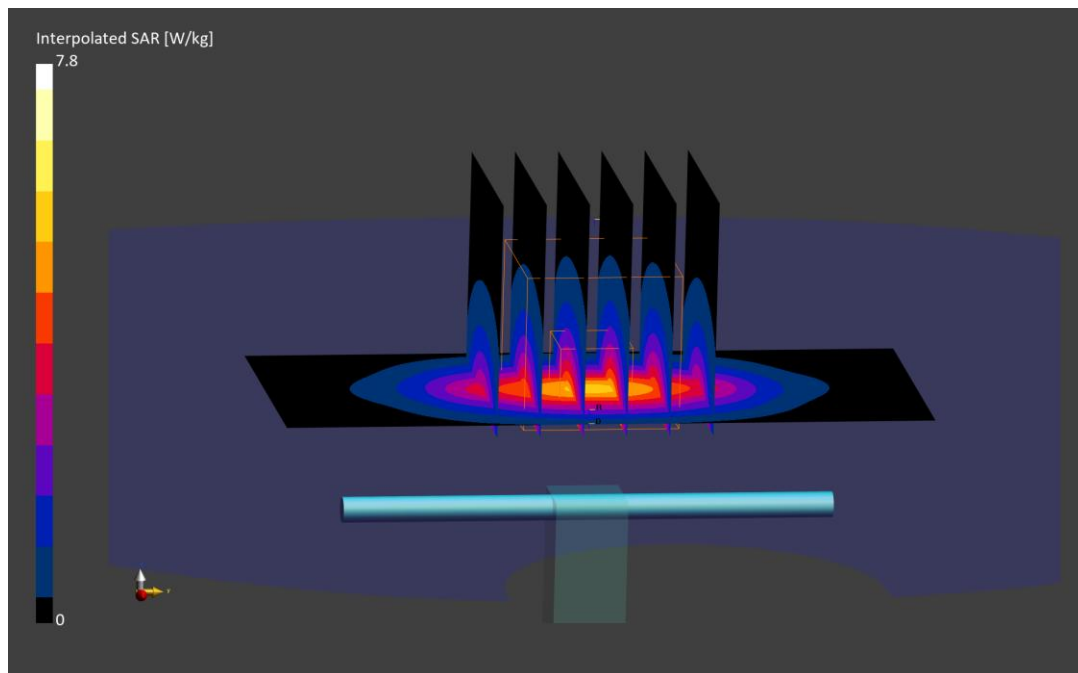

ELEMENT

DUT: Dipole 1900.0 MHz; Type: D1900V2 - SN5d181

Communication System: UID: 0, CW; Frequency: 1900.0 MHz

Medium: 1900 Head; Medium parameters used:

$f = 1900.0$ MHz; $\text{cond} = 1.43$ S/m; $\text{perm} = 38.7$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 10 mm

Test Date: 06/24/2026; Ambient Temp: 21.2°C; Tissue Temp: 20.1°C

Probe: EX3DV4 - SN7499; ConvF:(7.39,7.62,7.87); Calibrated: 2026-02-12

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1465; Calibrated: 2026-01-12

Phantom: Twin-SAM V8.0; Serial: 1935

Measurement SW: DASY Module SAR V16.4.0.5005

1900.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 90.0): Measurement grid: $dx=10.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 31.2): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 7.81 W/kg

SAR(1 g) = 4.22 W/kg; SAR(10 g) = 2.17 W/kg

Deviation (1 g) = 5.76%; Deviation (10 g) = 2.84%

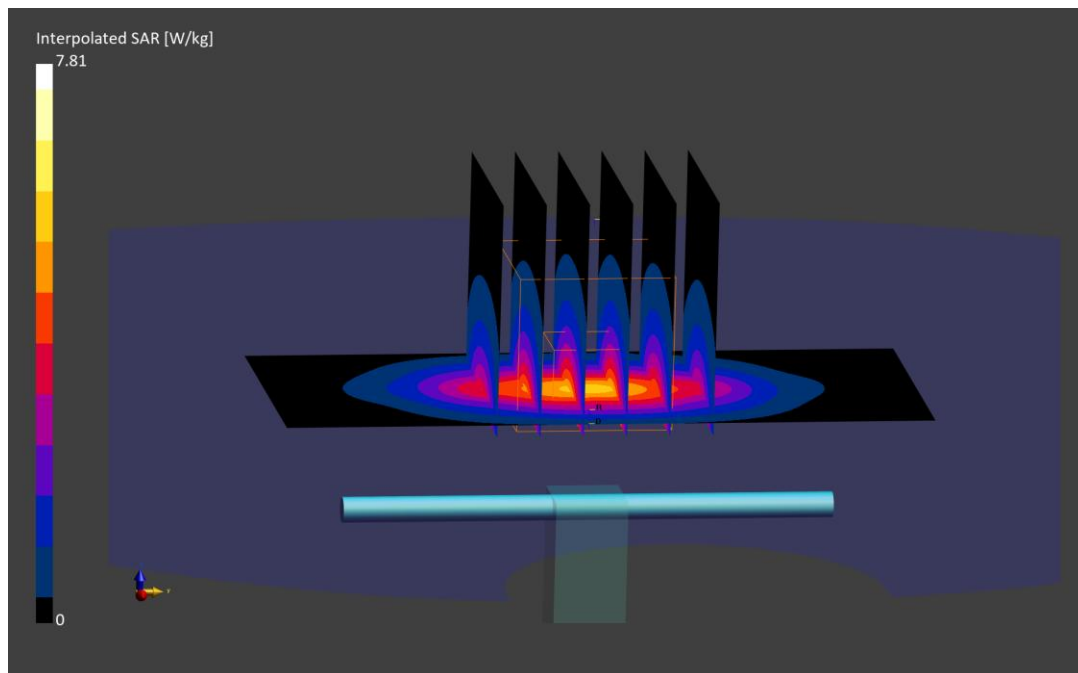

ELEMENT

DUT: Dipole 2450.0 MHz; Type: D2450V2 - SN855

Communication System: UID: 0, CW; Frequency: 2450.0 MHz

Medium: 2450 Head; Medium parameters used:

$f = 2450.0$ MHz; $\text{cond} = 1.86$ S/m; $\text{perm} = 38.4$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 10 mm

Test Date: 06/14/2026; Ambient Temp: 23.3°C; Tissue Temp: 22.5°C

Probe: EX3DV4 - SN7551; ConvF:(6.86,6.94,7.06); Calibrated: 2026-03-10

Sensor-Surface: 1.4mm (All points)

Electronics: DAE4 Sn1323; Calibrated: 2026-03-10

Phantom: Twin-SAM V8.0; Serial: 2058

Measurement SW: DASY Module SAR V16.4.0.5005

2450.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm

Zoom Scan (30.0 x 30.0 x 31.2): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 10.7 W/kg

SAR(1 g) = 5.09 W/kg; SAR(10 g) = 2.32 W/kg

Deviation (1 g) = -4.50%; Deviation (10 g) = -7.20%

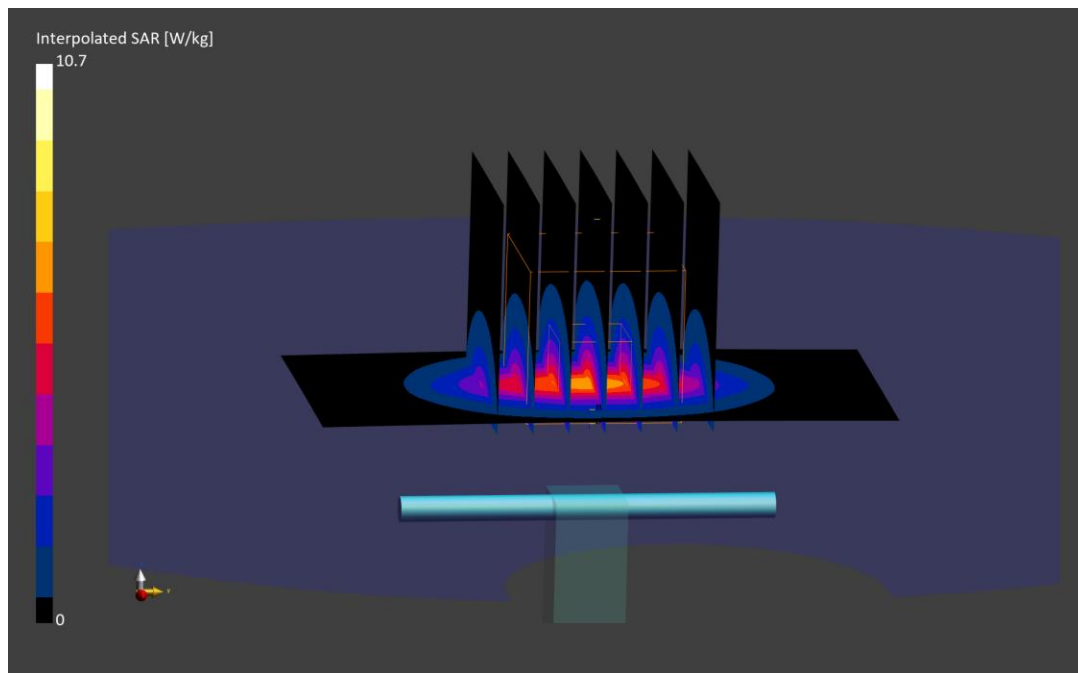

ELEMENT

DUT: Dipole 2450.0 MHz; Type: D2450V2 - SN855

Communication System: UID: 0, CW; Frequency: 2450.0 MHz

Medium: 2450 Head; Medium parameters used:

$f = 2450.0$ MHz; $\text{cond} = 1.77$ S/m; $\text{perm} = 38.0$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 10 mm

Test Date: 06/17/2026; Ambient Temp: 21.0°C; Tissue Temp: 20.0°C

Probe: EX3DV4 - SN7427; ConvF:(6.37,7.18,7.11); Calibrated: 2026-02-12

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1402; Calibrated: 2026-02-06

Phantom: Twin-SAM V5.0; Serial: 1647

Measurement SW: DASY Module SAR V16.4.0.5005

2450.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm

Zoom Scan (30.0 x 30.0 x 31.2): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 10.7 W/kg

SAR(1 g) = 5.43 W/kg; SAR(10 g) = 2.60 W/kg

Deviation (1 g) = 1.88%; Deviation (10 g) = 4.00%

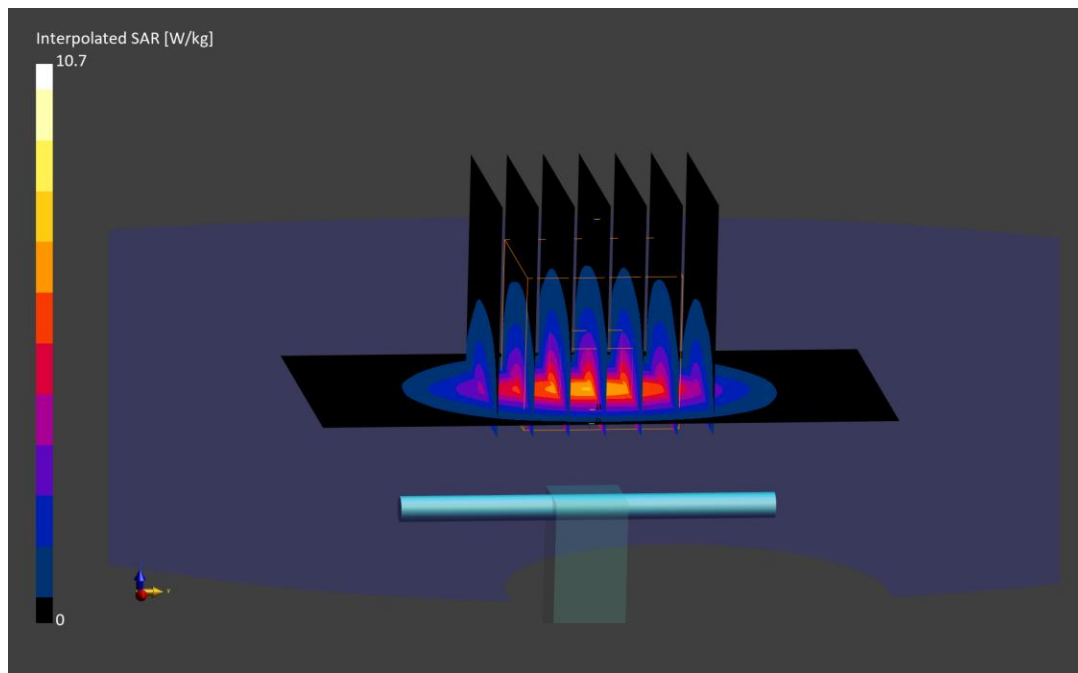

ELEMENT

DUT: Dipole 2450.0 MHz; Type: D2450V2 - SN855

Communication System: UID: 0, CW; Frequency: 2450.0 MHz

Medium: 2450 Head; Medium parameters used:

$f = 2450.0$ MHz; $\text{cond} = 1.81$ S/m; $\text{perm} = 40.1$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 10 mm

Test Date: 06/24/2026; Ambient Temp: 22.3°C; Tissue Temp: 21.2°C

Probe: EX3DV4 - SN7782; ConvF:(7.27,6.3,6.33); Calibrated: 2025-09-15

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1646; Calibrated: 2025-09-10

Phantom: Twin-SAM V4.0; Serial: 1598

Measurement SW: DASY Module SAR V16.4.0.5005

2450.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm

Zoom Scan (30.0 x 30.0 x 31.2): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 10.4 W/kg

SAR(1 g) = 5.03 W/kg; SAR(10 g) = 2.36 W/kg

Deviation (1 g) = -5.63%; Deviation (10 g) = -5.60%

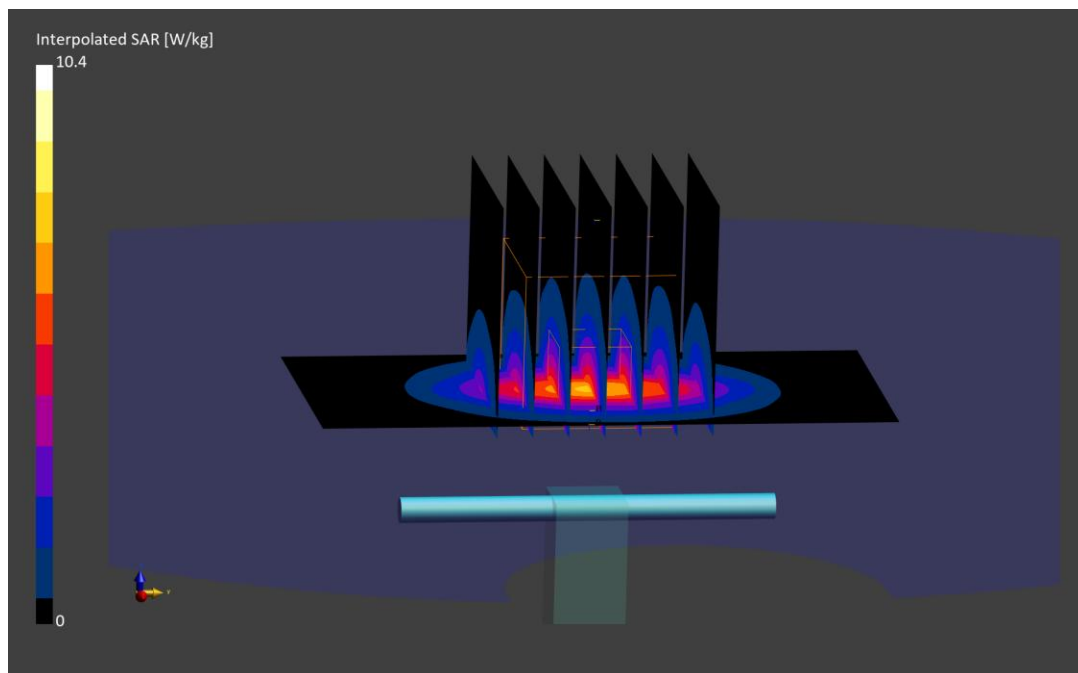

ELEMENT

DUT: Dipole 2450.0 MHz; Type: D2450V2 - SN921

Communication System: UID: 0, CW; Frequency: 2450.0 MHz

Medium: 2450 Head; Medium parameters used:

$f = 2450.0$ MHz; $\text{cond} = 1.78$ S/m; $\text{perm} = 38.9$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 10 mm

Test Date: 06/25/2026; Ambient Temp: 22.1°C; Tissue Temp: 20.1°C

Probe: EX3DV4 - SN3837; ConvF:(7.03,6.73,6.86); Calibrated: 2025-08-13

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn793; Calibrated: 2025-08-06

Phantom: Twin-SAM V8.0; Serial: 2071

Measurement SW: DASY Module SAR V16.4.0.5005

2450.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm

Zoom Scan (30.0 x 30.0 x 31.2): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 11.1 W/kg

SAR(1 g) = 5.48 W/kg; SAR(10 g) = 2.58 W/kg

Deviation (1 g) = 4.98%; Deviation (10 g) = 6.17%

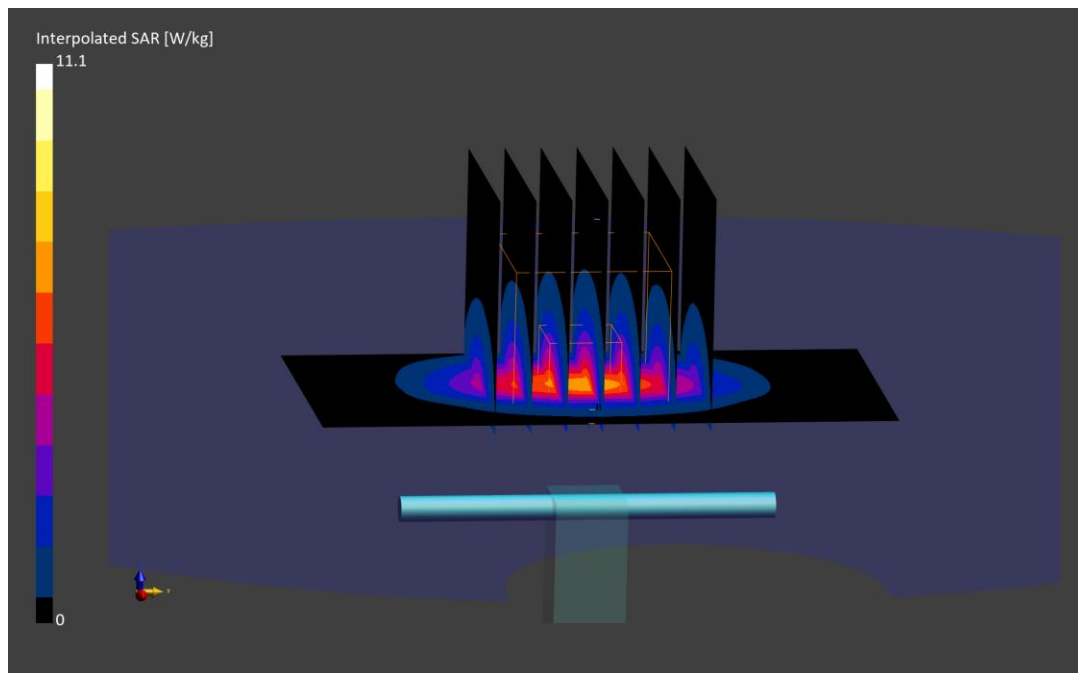

ELEMENT

DUT: Dipole 2450.0 MHz; Type: D2450V2 - SN855

Communication System: UID: 0, CW; Frequency: 2450.0 MHz

Medium: 2450 Head; Medium parameters used:

$f = 2450.0$ MHz; $\text{cond} = 1.88$ S/m; $\text{perm} = 38.1$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 10 mm

Test Date: 06/28/2026; Ambient Temp: 22.5°C; Tissue Temp: 22.9°C

Probe: EX3DV4 - SN7551; ConvF:(6.86,6.94,7.06); Calibrated: 2026-03-10

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1323; Calibrated: 2026-03-10

Phantom: Twin-SAM V8.0; Serial: 2058

Measurement SW: DASY Module SAR V16.4.0.5005

2450.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm

Zoom Scan (30.0 x 30.0 x 31.2): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 11.8 W/kg

SAR(1 g) = 5.53 W/kg; SAR(10 g) = 2.49 W/kg

Deviation (1 g) = 3.75%; Deviation (10 g) = -0.40%

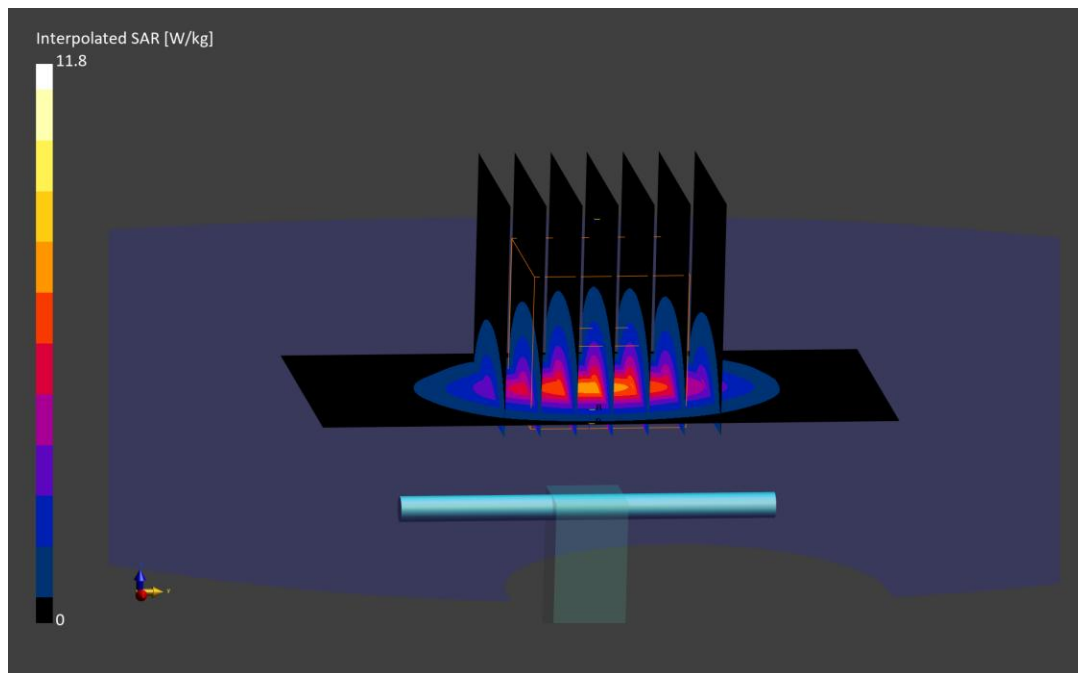

ELEMENT

DUT: Dipole 2450.0 MHz; Type: D2450V2 - SN855

Communication System: UID: 0, CW; Frequency: 2450.0 MHz

Medium: 2450 Head; Medium parameters used:

$f = 2450.0$ MHz; $\text{cond} = 1.77$ S/m; $\text{perm} = 37.4$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 10 mm

Test Date: 06/29/2026; Ambient Temp: 20.4°C; Tissue Temp: 20.6°C

Probe: EX3DV4 - SN7427; ConvF:(6.37,7.18,7.11); Calibrated: 2026-02-12

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1402; Calibrated: 2026-02-06

Phantom: Twin-SAM V5.0; Serial: 1647

Measurement SW: DASY Module SAR V16.4.0.5005

2450.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm

Zoom Scan (30.0 x 30.0 x 31.2): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 11.4 W/kg

SAR(1 g) = 5.42 W/kg; SAR(10 g) = 2.54 W/kg

Deviation (1 g) = 1.69%; Deviation (10 g) = 1.60%

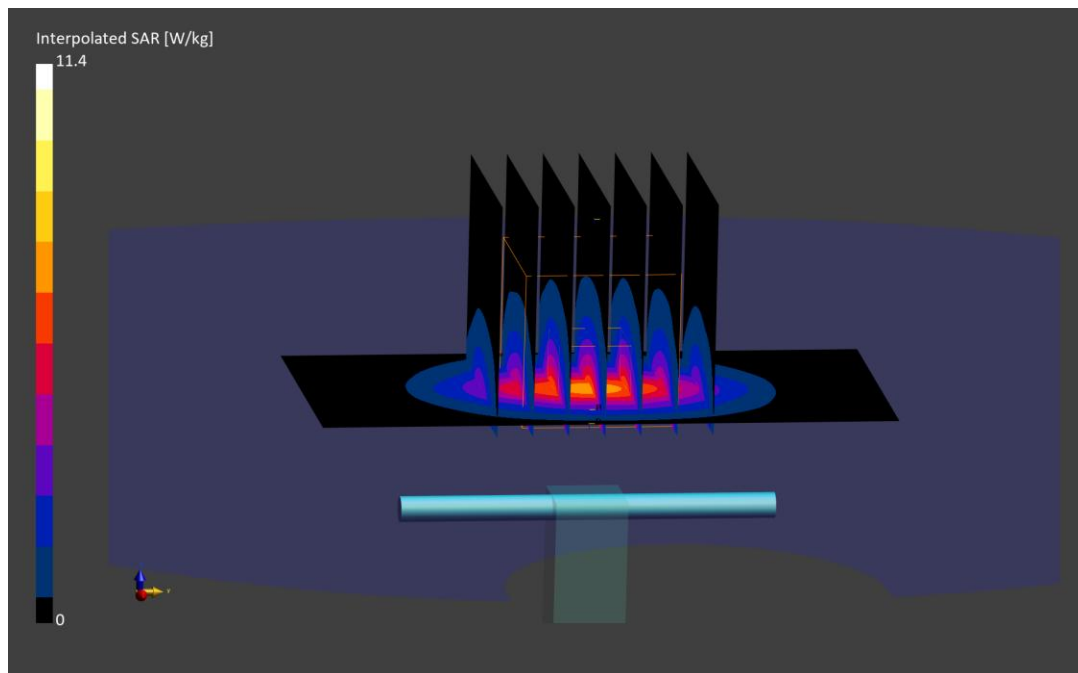

ELEMENT

DUT: Dipole 2450.0 MHz; Type: D2450V2 - SN855

Communication System: UID: 0, CW; Frequency: 2450.0 MHz

Medium: 2450 Head; Medium parameters used:

$f = 2450.0$ MHz; $\text{cond} = 1.77$ S/m; $\text{perm} = 37.9$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 10 mm

Test Date: 07/01/2026; Ambient Temp: 20.2°C; Tissue Temp: 19.1°C

Probe: EX3DV4 - SN7427; ConvF:(6.37,7.18,7.11); Calibrated: 2026-02-12

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1402; Calibrated: 2026-02-06

Phantom: Twin-SAM V5.0; Serial: 1647

Measurement SW: DASY Module SAR V16.4.0.5005

2450.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm

Zoom Scan (30.0 x 30.0 x 31.2): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 10.2 W/kg

SAR(1 g) = 5.03 W/kg; SAR(10 g) = 2.38 W/kg

Deviation (1 g) = -5.63%; Deviation (10 g) = -4.80%

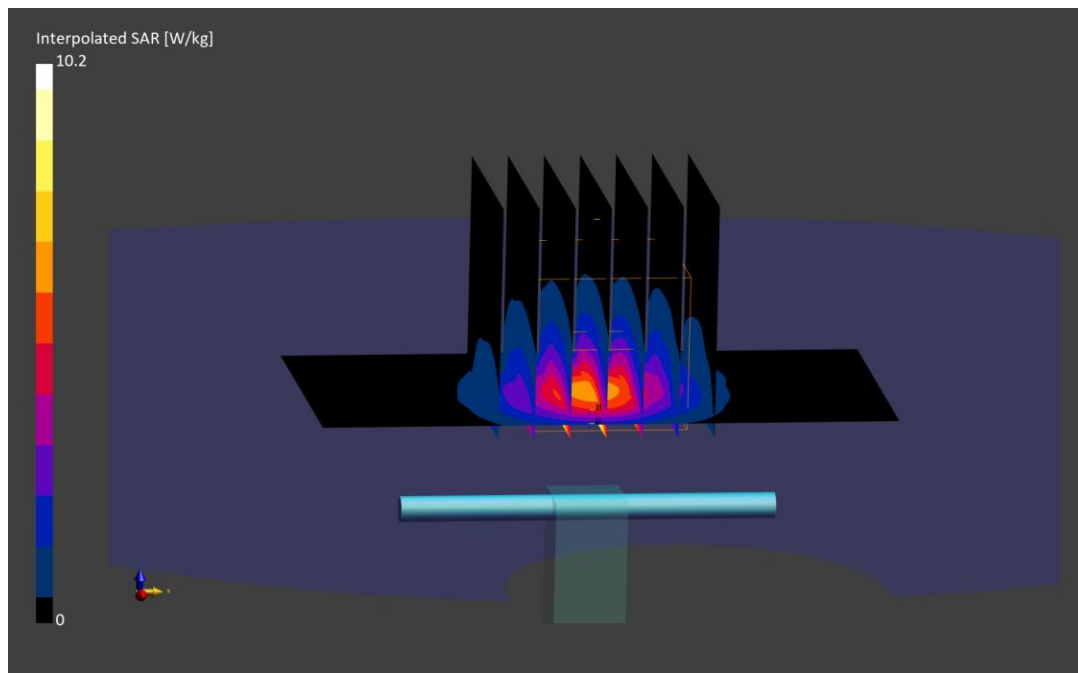

ELEMENT

DUT: Dipole 2450.0 MHz; Type: D2450V2 - SN921

Communication System: UID: 0, CW; Frequency: 2450.0 MHz

Medium: 2450 Head; Medium parameters used:

$f = 2450.0$ MHz; $\text{cond} = 1.79$ S/m; $\text{perm} = 39.0$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 10 mm

Test Date: 07/01/2026; Ambient Temp: 21.0°C; Tissue Temp: 19.7°C

Probe: EX3DV4 - SN3837; ConvF:(7.03,6.73,6.86); Calibrated: 2025-08-13

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn793; Calibrated: 2025-08-06

Phantom: Twin-SAM V8.0; Serial: 2071

Measurement SW: DASY Module SAR V16.4.0.5005

2450.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm

Zoom Scan (30.0 x 30.0 x 31.2): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 10.2 W/kg

SAR(1 g) = 5.16 W/kg; SAR(10 g) = 2.44 W/kg

Deviation (1 g) = -1.15%; Deviation (10 g) = 0.41%

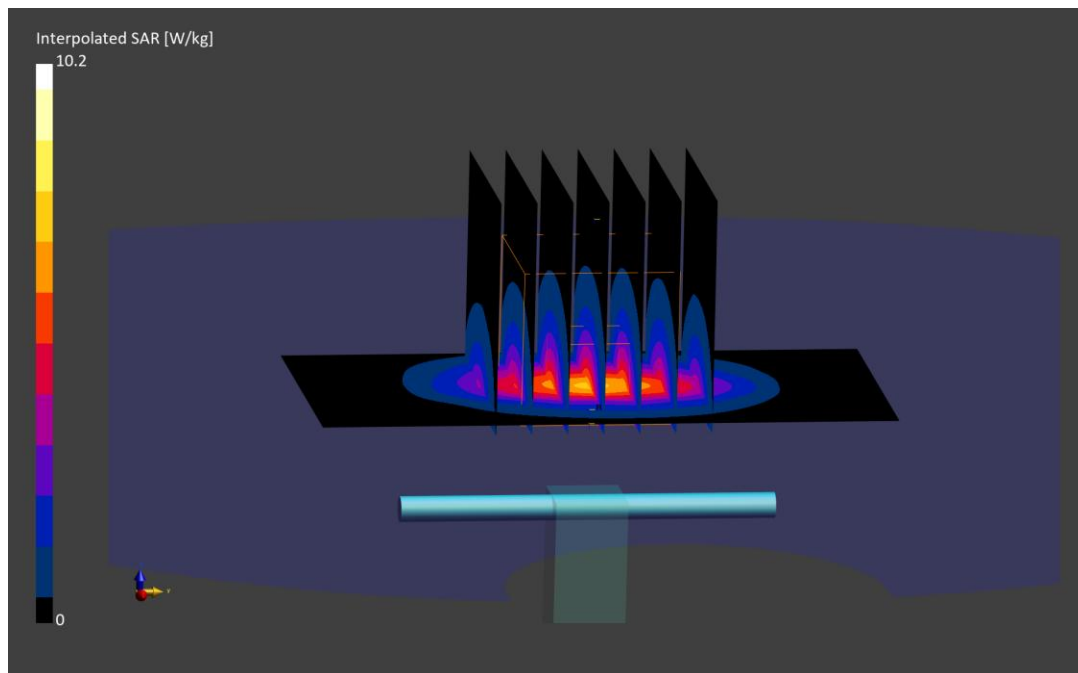

ELEMENT

DUT: Dipole 2600.0 MHz; Type: D2600V2 - SN1068

Communication System: UID: 0, CW; Frequency: 2600.0 MHz

Medium: 2450 Head; Medium parameters used:

$f = 2600.0$ MHz; $\text{cond} = 1.90$ S/m; $\text{perm} = 37.6$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 10 mm

Test Date: 06/17/2026; Ambient Temp: 21.0°C; Tissue Temp: 20.0°C

Probe: EX3DV4 - SN7427; ConvF:(6.5,7.32,7.25); Calibrated: 2026-02-12

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1402; Calibrated: 2026-02-06

Phantom: Twin-SAM V5.0; Serial: 1647

Measurement SW: DASY Module SAR V16.4.0.5005

2600.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm

Zoom Scan (30.0 x 30.0 x 31.2): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 11.4 W/kg

SAR(1 g) = 5.59 W/kg; SAR(10 g) = 2.59 W/kg

Deviation (1 g) = -0.36%; Deviation (10 g) = 2.78%

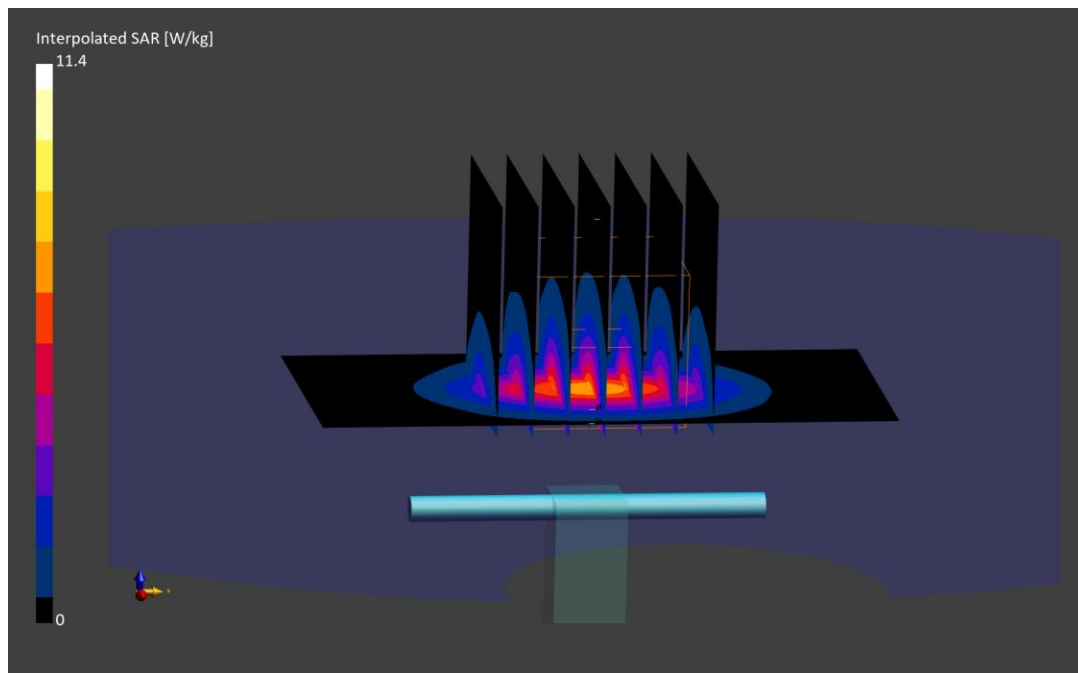

ELEMENT

DUT: Dipole 2600.0 MHz; Type: D2600V2 - SN1068

Communication System: UID: 0, CW; Frequency: 2600.0 MHz

Medium: 2450 Head; Medium parameters used:

$f = 2600.0$ MHz; $\text{cond} = 1.92$ S/m; $\text{perm} = 39.8$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 10 mm

Test Date: 06/24/2026; Ambient Temp: 22.3°C; Tissue Temp: 21.2°C

Probe: EX3DV4 - SN7782; ConvF:(7.3,6.32,6.35); Calibrated: 2025-09-15

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1646; Calibrated: 2025-09-10

Phantom: Twin-SAM V4.0; Serial: 1598

Measurement SW: DASY Module SAR V16.4.0.5005

2600.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm

Zoom Scan (30.0 x 30.0 x 31.2): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 11.0 W/kg

SAR(1 g) = 5.19 W/kg; SAR(10 g) = 2.36 W/kg

Deviation (1 g) = -7.49%; Deviation (10 g) = -6.35%

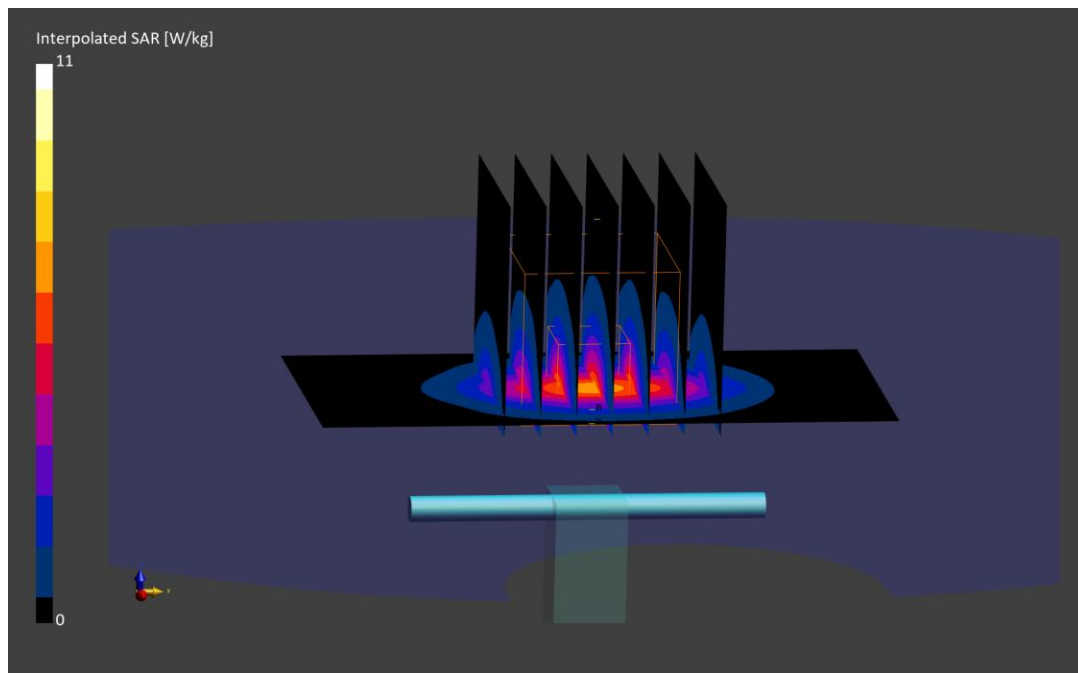

ELEMENT

DUT: Dipole 2600.0 MHz; Type: D2600V2 - SN1069

Communication System: UID: 0, CW; Frequency: 2600.0 MHz

Medium: 2450 Head; Medium parameters used:

$f = 2600.0$ MHz; $\text{cond} = 1.89$ S/m; $\text{perm} = 38.7$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 10 mm

Test Date: 06/25/2026; Ambient Temp: 22.1°C; Tissue Temp: 20.1°C

Probe: EX3DV4 - SN3837; ConvF:(6.88,6.58,6.72); Calibrated: 2025-08-13

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn793; Calibrated: 2025-08-06

Phantom: Twin-SAM V8.0; Serial: 2071

Measurement SW: DASY Module SAR V16.4.0.5005

2600.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm

Zoom Scan (30.0 x 30.0 x 31.2): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 11.7 W/kg

SAR(1 g) = 5.67 W/kg; SAR(10 g) = 2.58 W/kg

Deviation (1 g) = 0.89%; Deviation (10 g) = 1.18%

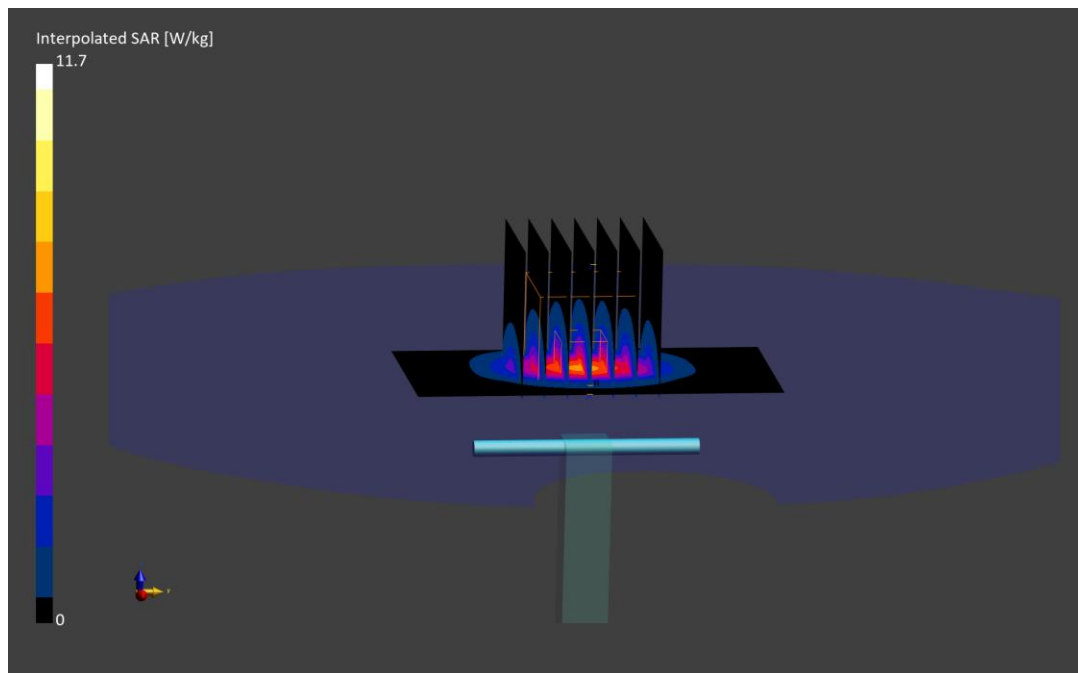

ELEMENT

DUT: Dipole 2600.0 MHz; Type: D2600V2 - SN1068

Communication System: UID: 0, CW; Frequency: 2600.0 MHz

Medium: 2450 Head; Medium parameters used:

$f = 2600.0$ MHz; $\text{cond} = 2.05$ S/m; $\text{perm} = 37.4$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 10 mm

Test Date: 06/28/2026; Ambient Temp: 22.5°C; Tissue Temp: 22.9°C

Probe: EX3DV4 - SN7551; ConvF:(6.89,6.98,7.1); Calibrated: 2026-03-10

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1323; Calibrated: 2026-03-10

Phantom: Twin-SAM V8.0; Serial: 2058

Measurement SW: DASY Module SAR V16.4.0.5005

2600.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm

Zoom Scan (30.0 x 30.0 x 31.2): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 12.8 W/kg

SAR(1 g) = 5.72 W/kg; SAR(10 g) = 2.49 W/kg

Deviation (1 g) = 1.96%; Deviation (10 g) = -1.19%

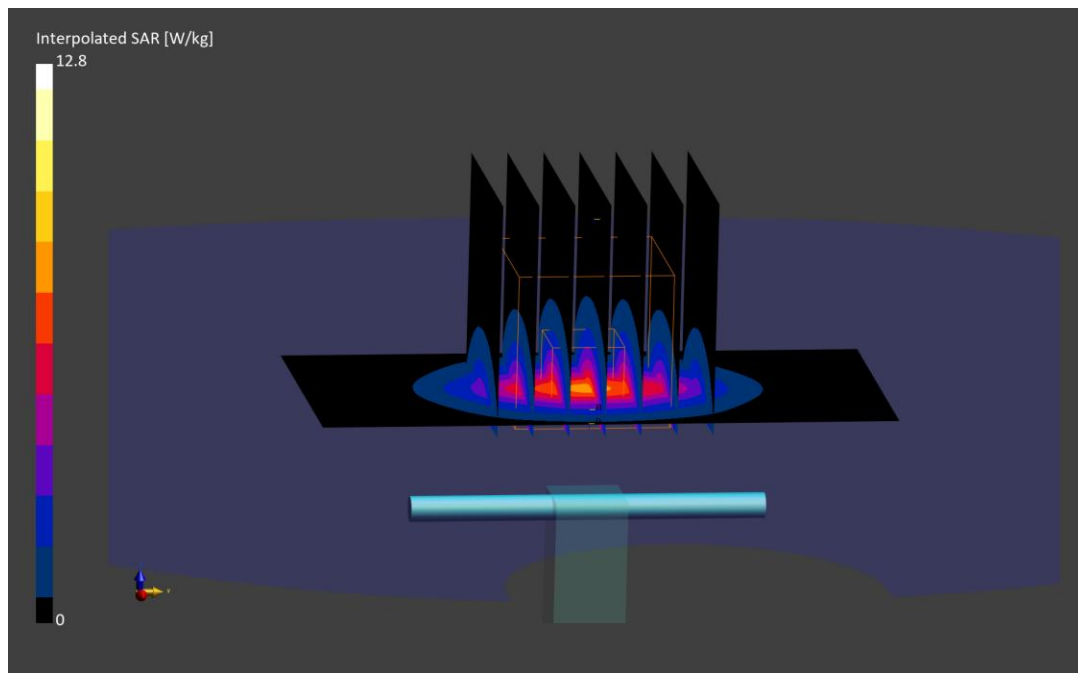

ELEMENT

DUT: Dipole 2600.0 MHz; Type: D2600V2 - SN1068

Communication System: UID: 0, CW; Frequency: 2600.0 MHz

Medium: 2450 Head; Medium parameters used:

$f = 2600.0$ MHz; $\text{cond} = 1.89$ S/m; $\text{perm} = 37.2$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 10 mm

Test Date: 06/29/2026; Ambient Temp: 20.4°C; Tissue Temp: 20.6°C

Probe: EX3DV4 - SN7427; ConvF:(6.5,7.32,7.25); Calibrated: 2026-02-12

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1402; Calibrated: 2026-02-06

Phantom: Twin-SAM V5.0; Serial: 1647

Measurement SW: DASY Module SAR V16.4.0.5005

2600.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm

Zoom Scan (30.0 x 30.0 x 31.2): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 11.7 W/kg

SAR(1 g) = 5.52 W/kg; SAR(10 g) = 2.51 W/kg

Deviation (1 g) = -1.60%; Deviation (10 g) = -0.40%

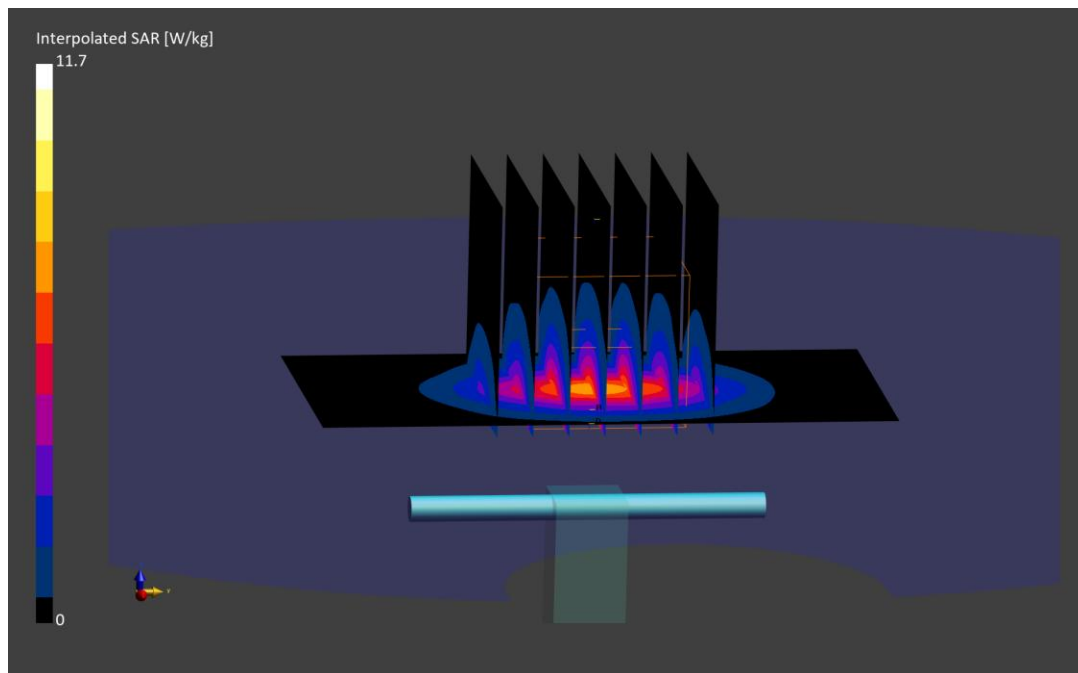

ELEMENT

DUT: Dipole 2600.0 MHz; Type: D2600V2 - SN1068

Communication System: UID: 0, CW; Frequency: 2600.0 MHz

Medium: 2450 Head; Medium parameters used:

$f = 2600.0$ MHz; $\text{cond} = 1.90$ S/m; $\text{perm} = 37.6$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 10 mm

Test Date: 07/01/2026; Ambient Temp: 20.2°C; Tissue Temp: 19.1°C

Probe: EX3DV4 - SN7427; ConvF:(6.5,7.32,7.25); Calibrated: 2026-02-12

Sensor-Surface: 1.4mm (All points)

Electronics: DAE4 Sn1402; Calibrated: 2026-02-06

Phantom: Twin-SAM V5.0; Serial: 1647

Measurement SW: DASY Module SAR V16.4.0.5005

2600.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm

Zoom Scan (30.0 x 30.0 x 31.2): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 11.5 W/kg

SAR(1 g) = 5.48 W/kg; SAR(10 g) = 2.51 W/kg

Deviation (1 g) = -2.32%; Deviation (10 g) = -0.40%

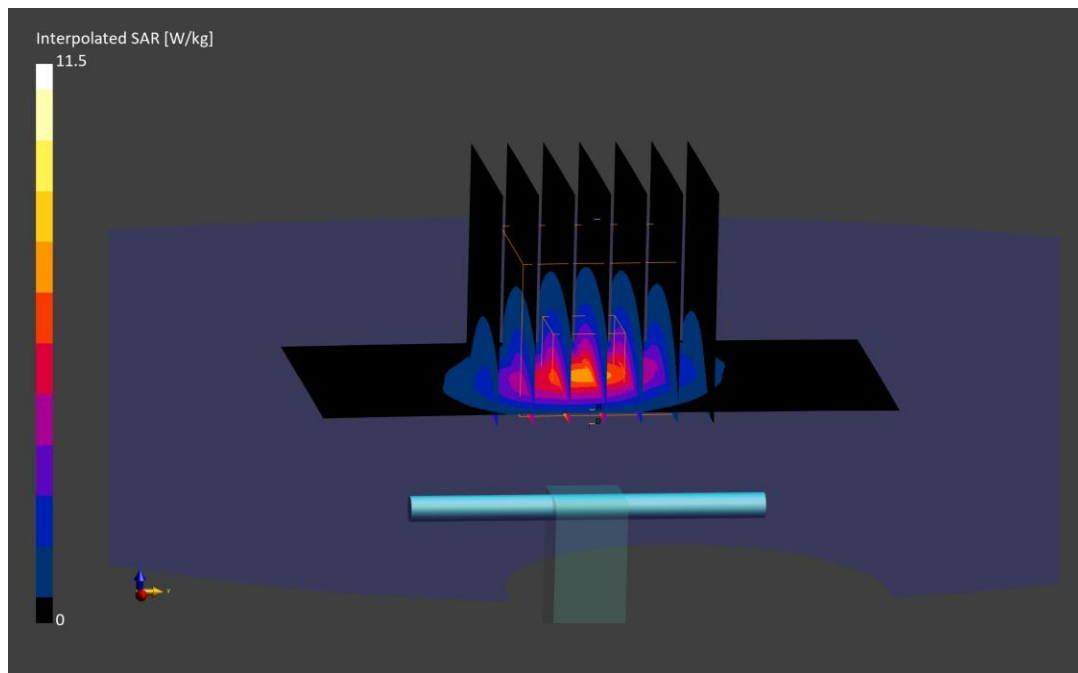

ELEMENT

DUT: Dipole 2600.0 MHz; Type: D2600V2 - SN1069

Communication System: UID: 0, CW; Frequency: 2600.0 MHz

Medium: 2450 Head; Medium parameters used:

$f = 2600.0$ MHz; $\text{cond} = 1.91$ S/m; $\text{perm} = 38.7$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 10 mm

Test Date: 07/01/2026; Ambient Temp: 21.0°C; Tissue Temp: 19.7°C

Probe: EX3DV4 - SN3837; ConvF:(6.88,6.58,6.72); Calibrated: 2025-08-13

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn793; Calibrated: 2025-08-06

Phantom: Twin-SAM V8.0; Serial: 2071

Measurement SW: DASY Module SAR V16.4.0.5005

2600.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm

Zoom Scan (30.0 x 30.0 x 31.2): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 10.9 W/kg

SAR(1 g) = 5.37 W/kg; SAR(10 g) = 2.48 W/kg

Deviation (1 g) = -4.45%; Deviation (10 g) = -2.75%

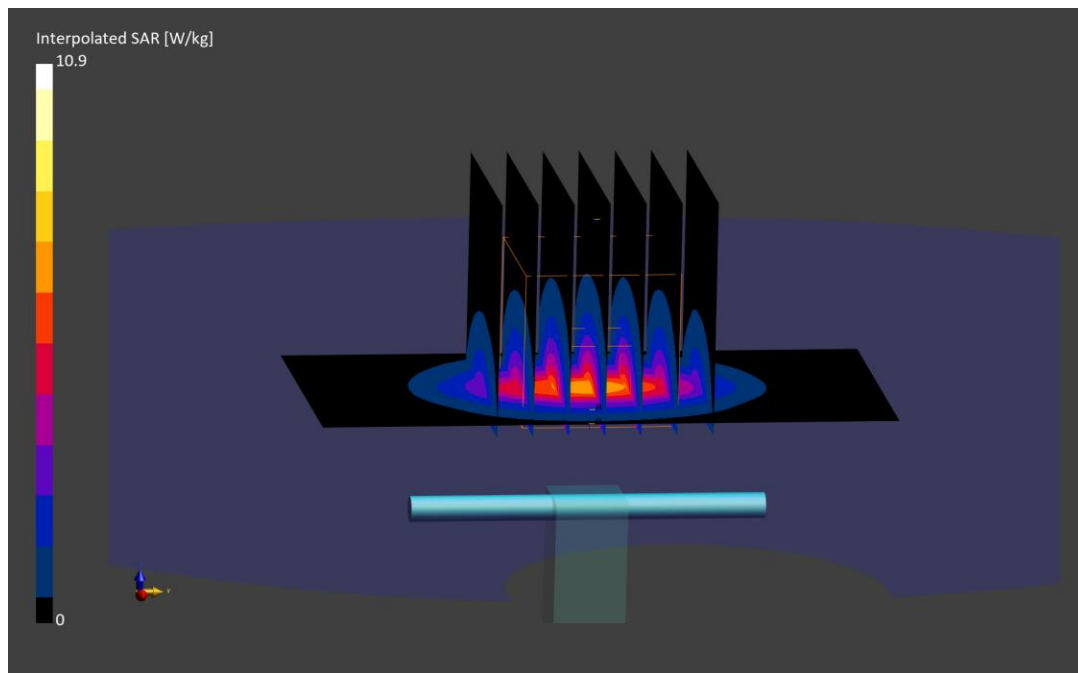

ELEMENT

DUT: Dipole 5250.0 MHz; Type: D5GHzV2 - SN1123

Communication System: UID: 0, CW; Frequency: 5250.0 MHz
Medium: 5200-5800 Head; Medium parameters used:
f = 5250.0 MHz; cond = 4.50 S/m; perm = 36.0; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 06/14/2026; Ambient Temp: 19.0°C; Tissue Temp: 19.0°C

Probe: EX3DV4 - SN7668; ConvF:(5.25,5.33,5.09); Calibrated: 2025-08-11
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1681; Calibrated: 2025-08-08
Phantom: Twin-SAM V8.0; Serial: 2027
Measurement SW: DASY Module SAR V16.4.0.5005

5250.0 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (32.0 x 32.0 x 22.9): Measurement grid: dx=4.0 mm, dy=4.0 mm, dz=1.4 mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 14.8 W/kg

SAR(1 g) = 3.73 W/kg; SAR(10 g) = 1.10 W/kg

Deviation (1 g) = -6.98%; Deviation (10 g) = -3.93%

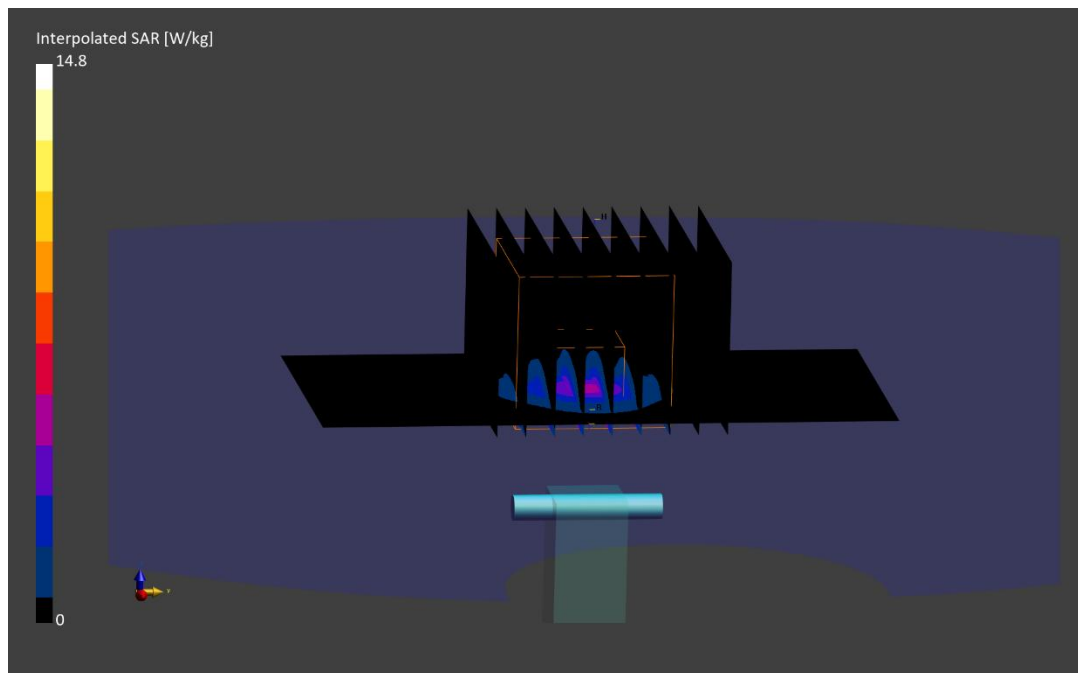

ELEMENT

DUT: Dipole 5250.0 MHz; Type: D5GHzV2 - SN1066

Communication System: UID: 0, CW; Frequency: 5250.0 MHz
Medium: 5200-5800 Head; Medium parameters used:
 $f = 5250.0$ MHz; $\text{cond} = 4.51$ S/m; $\text{perm} = 35.1$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 06/22/2026; Ambient Temp: 22.0°C; Tissue Temp: 20.6°C

Probe: EX3DV4 - SN7490; ConvF:(5.24,5.35,5.52); Calibrated: 2025-12-23
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1644; Calibrated: 2025-12-03
Phantom: Twin-SAM V8.0; Serial: 2070
Measurement SW: DASY Module SAR V16.4.0.5005

5250.0 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (40.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm

Zoom Scan (32.0 x 32.0 x 22.9): Measurement grid: $dx=4.0$ mm, $dy=4.0$ mm, $dz=1.4$ mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 15.6 W/kg

SAR(1 g) = 3.93 W/kg; SAR(10 g) = 1.13 W/kg

Deviation (1 g) = 0.90%; Deviation (10 g) = 0.44%

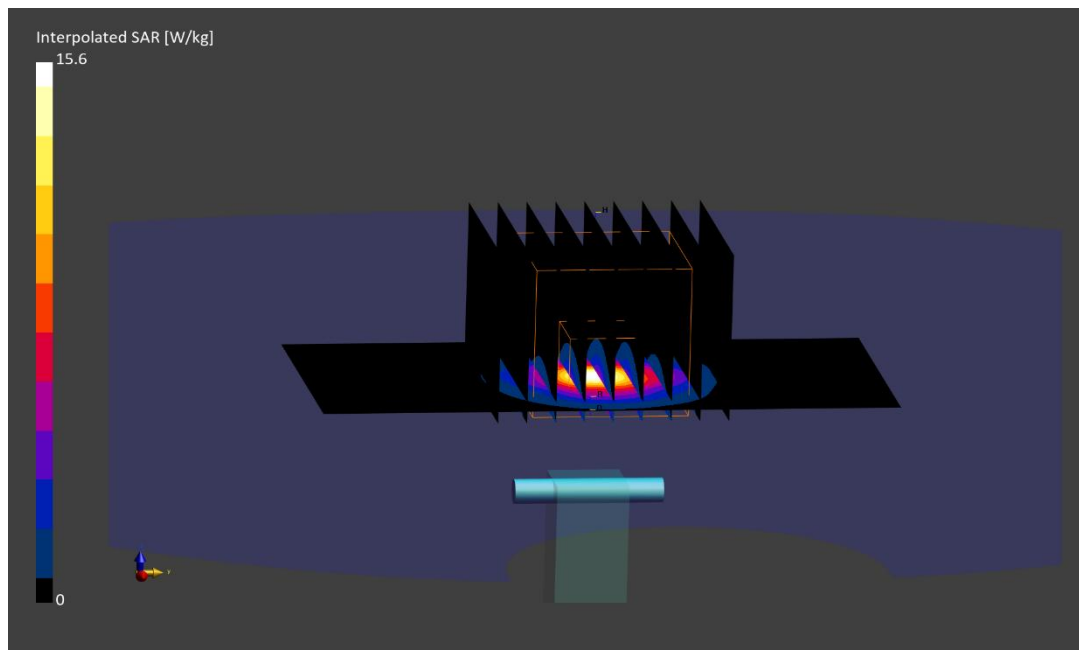

ELEMENT

DUT: Dipole 5600.0 MHz; Type: D5GHzV2 - SN1123

Communication System: UID: 0, CW; Frequency: 5600.0 MHz
Medium: 5200-5800 Head; Medium parameters used:
f = 5600.0 MHz; cond = 4.89 S/m; perm = 35.4; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 06/14/2026; Ambient Temp: 19.0°C; Tissue Temp: 19.0°C

Probe: EX3DV4 - SN7668; ConvF:(4.85,4.92,4.7); Calibrated: 2025-08-11
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1681; Calibrated: 2025-08-08
Phantom: Twin-SAM V8.0; Serial: 2027
Measurement SW: DASY Module SAR V16.4.0.5005

5600.0 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (32.0 x 32.0 x 22.9): Measurement grid: dx=4.0 mm, dy=4.0 mm, dz=1.4 mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 16.3 W/kg

SAR(1 g) = 3.86 W/kg; SAR(10 g) = 1.13 W/kg

Deviation (1 g) = -5.97%; Deviation (10 g) = -3.83%

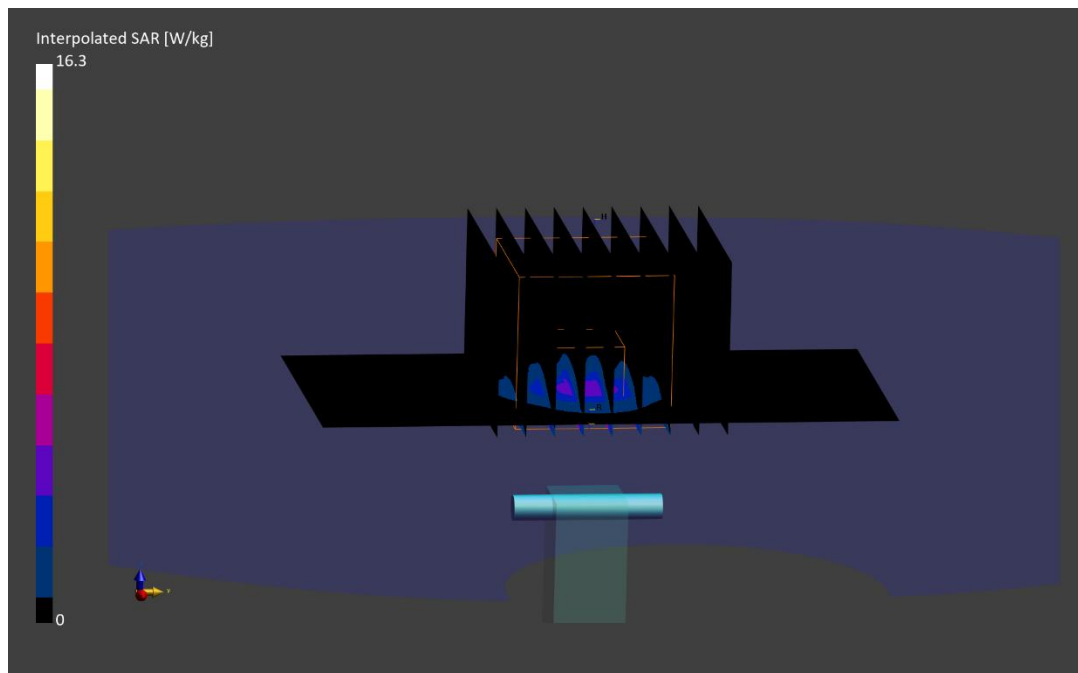

ELEMENT

DUT: Dipole 5600.0 MHz; Type: D5GHzV2 - SN1066

Communication System: UID: 0, CW; Frequency: 5600.0 MHz
Medium: 5200-5800 Head; Medium parameters used:
 $f = 5600.0$ MHz; $\text{cond} = 4.91$ S/m; $\text{perm} = 34.4$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 06/22/2026; Ambient Temp: 22.0°C; Tissue Temp: 20.6°C

Probe: EX3DV4 - SN7490; ConvF:(4.77,4.87,5.03); Calibrated: 2025-12-23
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1644; Calibrated: 2025-12-03
Phantom: Twin-SAM V8.0; Serial: 2070
Measurement SW: DASY Module SAR V16.4.0.5005

5600.0 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (40.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm

Zoom Scan (32.0 x 32.0 x 22.9): Measurement grid: $dx=4.0$ mm, $dy=4.0$ mm, $dz=1.4$ mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 17.4 W/kg

SAR(1 g) = 4.07 W/kg; SAR(10 g) = 1.16 W/kg

Deviation (1 g) = -0.49%; Deviation (10 g) = -2.11%

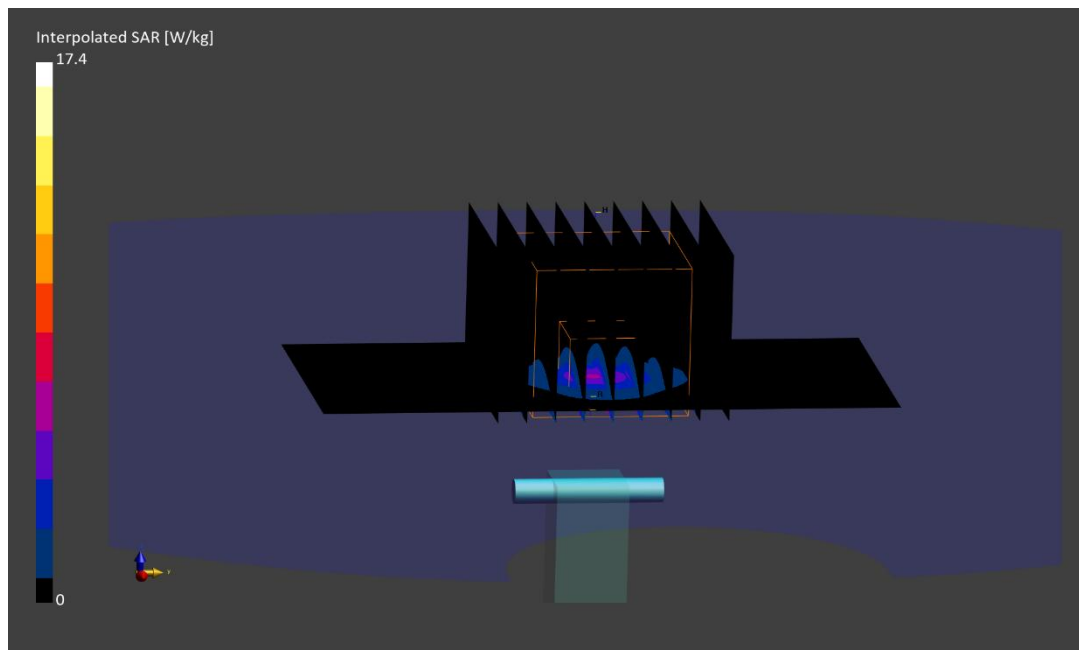

ELEMENT

DUT: Dipole 5750.0 MHz; Type: D5GHzV2 - SN1123

Communication System: UID: 0, CW; Frequency: 5750.0 MHz
Medium: 5200-5800 Head; Medium parameters used:
 $f = 5750.0$ MHz; $\text{cond} = 5.06$ S/m; $\text{perm} = 35.1$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 06/14/2026; Ambient Temp: 19.0°C; Tissue Temp: 19.0°C

Probe: EX3DV4 - SN7668; ConvF:(4.84,4.91,4.69); Calibrated: 2025-08-11
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1681; Calibrated: 2025-08-08
Phantom: Twin-SAM V8.0; Serial: 2027
Measurement SW: DASY Module SAR V16.4.0.5005

5750.0 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (40.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm

Zoom Scan (32.0 x 32.0 x 22.9): Measurement grid: $dx=4.0$ mm, $dy=4.0$ mm, $dz=1.4$ mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 16.1 W/kg

SAR(1 g) = 3.69 W/kg; SAR(10 g) = 1.09 W/kg

Deviation (1 g) = -5.99%; Deviation (10 g) = -2.24%

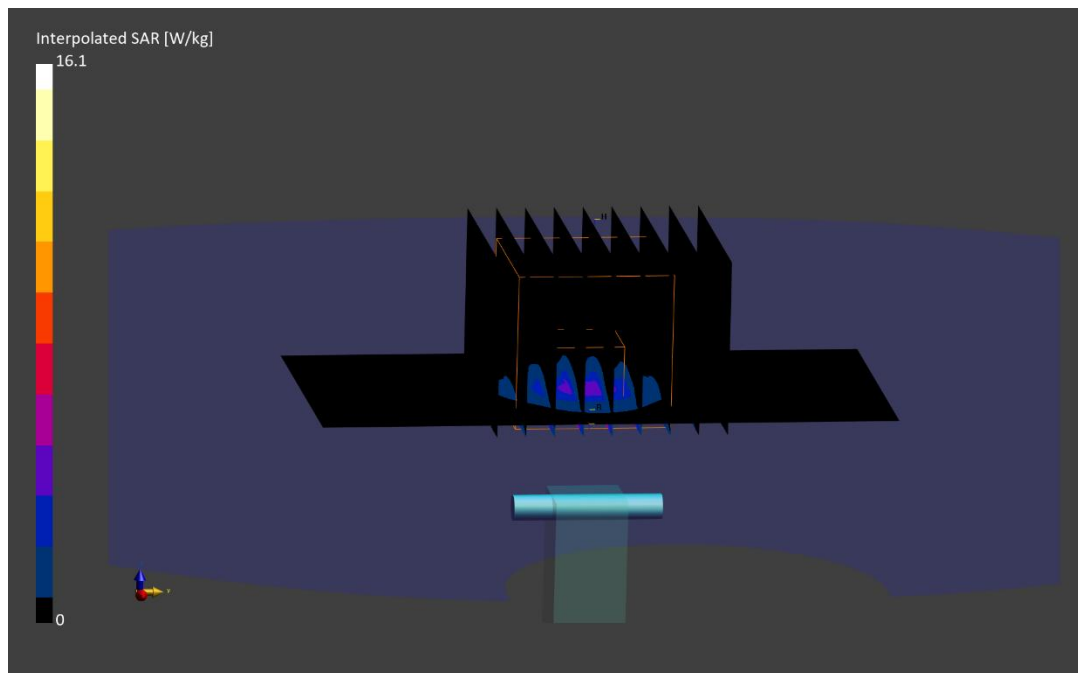

ELEMENT

DUT: Dipole 5750.0 MHz; Type: D5GHzV2 - SN1066

Communication System: UID: 0, CW; Frequency: 5750.0 MHz
Medium: 5200-5800 Head; Medium parameters used:
 $f = 5750.0$ MHz; $\text{cond} = 5.07$ S/m; $\text{perm} = 34.1$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 06/22/2026; Ambient Temp: 22.0°C; Tissue Temp: 20.6°C

Probe: EX3DV4 - SN7490; ConvF:(4.92,5.02,5.19); Calibrated: 2025-12-23
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1644; Calibrated: 2025-12-03
Phantom: Twin-SAM V8.0; Serial: 2070
Measurement SW: DASY Module SAR V16.4.0.5005

5750.0 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (40.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm

Zoom Scan (32.0 x 32.0 x 22.9): Measurement grid: $dx=4.0$ mm, $dy=4.0$ mm, $dz=1.4$ mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 18.1 W/kg

SAR(1 g) = 4.13 W/kg; SAR(10 g) = 1.18 W/kg

Deviation (1 g) = 2.35%; Deviation (10 g) = 1.72%

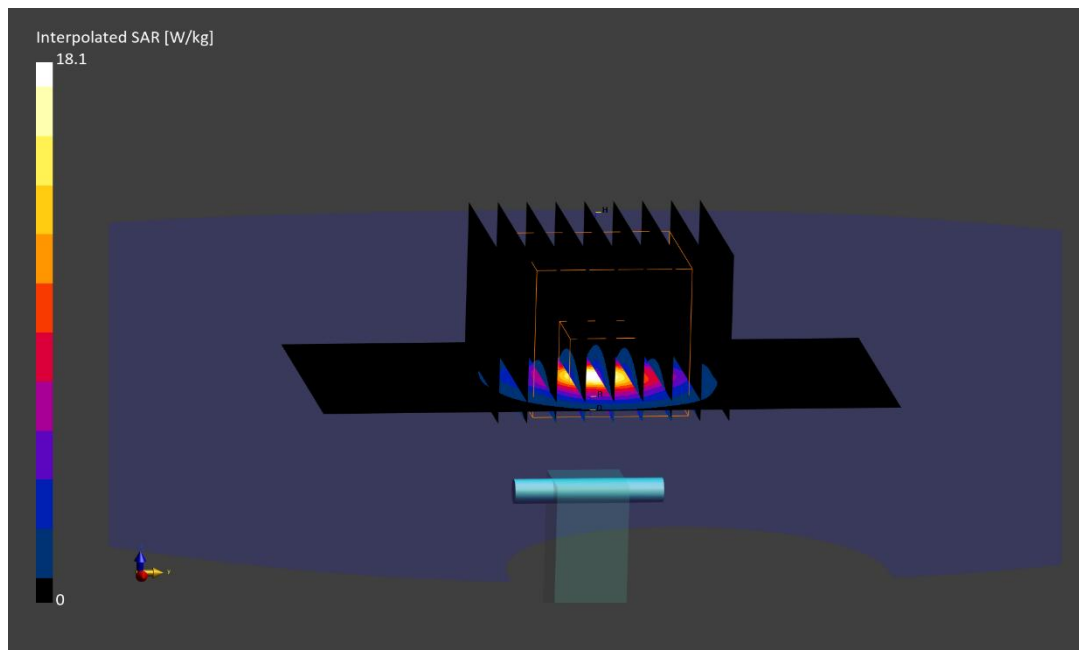

ELEMENT

DUT: Dipole 5850.0 MHz; Type: D5GHzV2 - SN1123

Communication System: UID: 0, CW; Frequency: 5850.0 MHz
Medium: 5200-5800 Head; Medium parameters used:
 $f = 5850.0$ MHz; $\text{cond} = 5.17$ S/m; $\text{perm} = 34.9$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 06/14/2026; Ambient Temp: 19.0°C; Tissue Temp: 19.0°C

Probe: EX3DV4 - SN7668; ConvF:(4.67,4.74,4.52); Calibrated: 2025-08-11
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1681; Calibrated: 2025-08-08
Phantom: Twin-SAM V8.0; Serial: 2027
Measurement SW: DASY Module SAR V16.4.0.5005

5850.0 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (40.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm

Zoom Scan (32.0 x 32.0 x 22.9): Measurement grid: $dx=4.0$ mm, $dy=4.0$ mm, $dz=1.4$ mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 17.1 W/kg

SAR(1 g) = 3.82 W/kg; SAR(10 g) = 1.11 W/kg

Deviation (1 g) = -7.17%; Deviation (10 g) = -5.13%

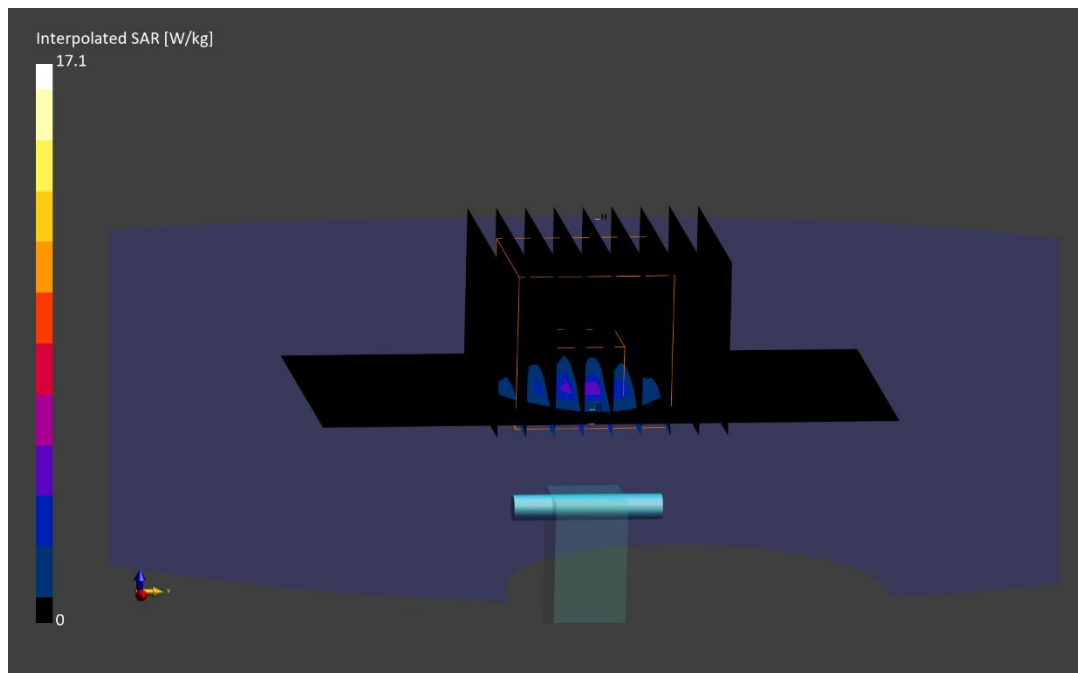

ELEMENT

DUT: Dipole 5850.0 MHz; Type: D5GHzV2 - SN1066

Communication System: UID: 0, CW; Frequency: 5850.0 MHz
Medium: 5200-5800 Head; Medium parameters used:
 $f = 5850.0$ MHz; $\text{cond} = 5.19$ S/m; $\text{perm} = 33.9$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 06/22/2026; Ambient Temp: 22.0°C; Tissue Temp: 20.6°C

Probe: EX3DV4 - SN7490; ConvF:(4.69,4.79,4.95); Calibrated: 2025-12-23
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1644; Calibrated: 2025-12-03
Phantom: Twin-SAM V8.0; Serial: 2070
Measurement SW: DASY Module SAR V16.4.0.5005

5850.0 MHz System Verification at 17.0 dBm (50 mW)

Area Scan (40.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm

Zoom Scan (32.0 x 32.0 x 22.9): Measurement grid: $dx=4.0$ mm, $dy=4.0$ mm, $dz=1.4$ mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 18.5 W/kg

SAR(1 g) = 4.13 W/kg; SAR(10 g) = 1.17 W/kg

Deviation (1 g) = 6.72%; Deviation (10 g) = 5.41%

