

APPENDIX A: VERIFICATION PLOTS

FCC ID: BCG-A3587	RF EXPOSURE PART 2 REPORT		Approved by: Technical Manager
EUT Type: Watch		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.	APPENDIX A

V 10.6 09/14/2023

ELEMENT

DUT: Dipole 2450.000 MHz; Type: D2450V2 - SN921

Communication System: UID: 0, CW; Frequency: 2450.000 MHz
Medium: 2450 Head; Medium parameters used:
 $f = 2450.000$ MHz; $\text{cond} = 1.77$ S/m; $\text{perm} = 41.0$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 07/31/2026; Ambient Temp: 23.5°C; Tissue Temp: 21.4°C

Probe: EX3DV4 - SN7532; ConvF:(7.25,7.18,7.99); Calibrated: 2026-04-15
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1582; Calibrated: 2026-04-13
Phantom: Twin-SAM V8.0; Serial: 1936
Measurement SW: DASY Module SAR V16.4.0.5005

2450.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 9.69 W/kg

SAR(1 g) = 4.98 W/kg

Deviation (1 g) = -4.60%

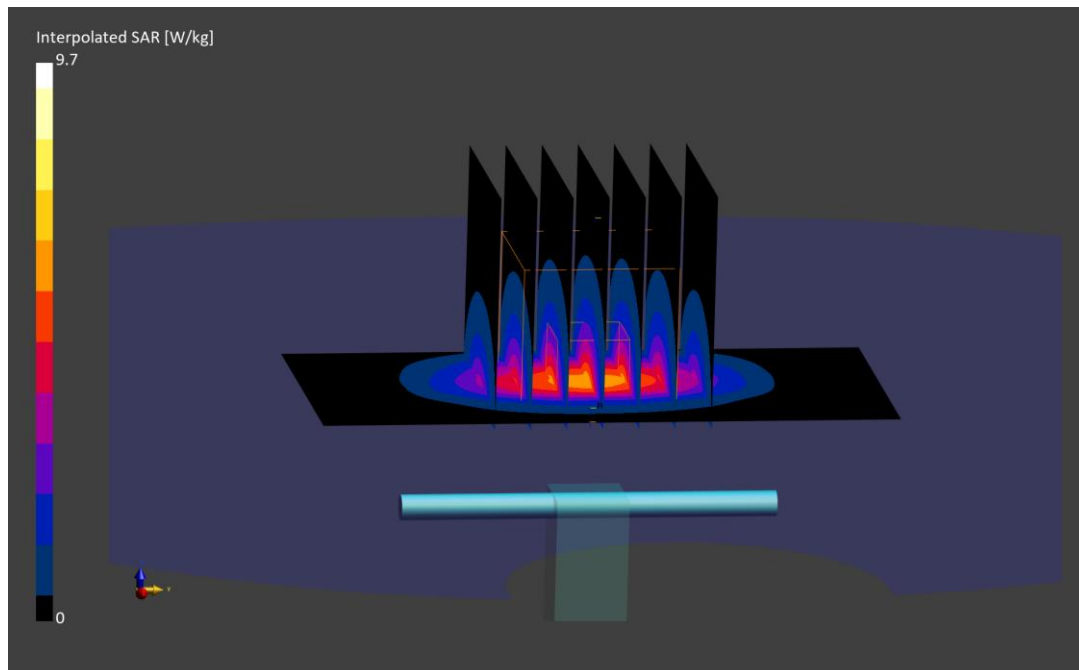

ELEMENT

DUT: Dipole 2450.000 MHz; Type: D2450V2 - SN921

Communication System: UID: 0, CW; Frequency: 2450.000 MHz
Medium: 2450 Head; Medium parameters used:
 $f = 2450.000$ MHz; $\text{cond} = 1.78$ S/m; $\text{perm} = 39.2$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 08/06/2026; Ambient Temp: 21.5°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN7416; ConvF:(7.16,7.38,7.29); Calibrated: 2026-05-06
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn701; Calibrated: 2026-05-08
Phantom: Twin-SAM V8.0; Serial: 2067
Measurement SW: DASY Module SAR V16.4.0.5005

2450.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 10.6 W/kg

SAR(1 g) = 5.20 W/kg

Deviation (1 g) = -0.38%

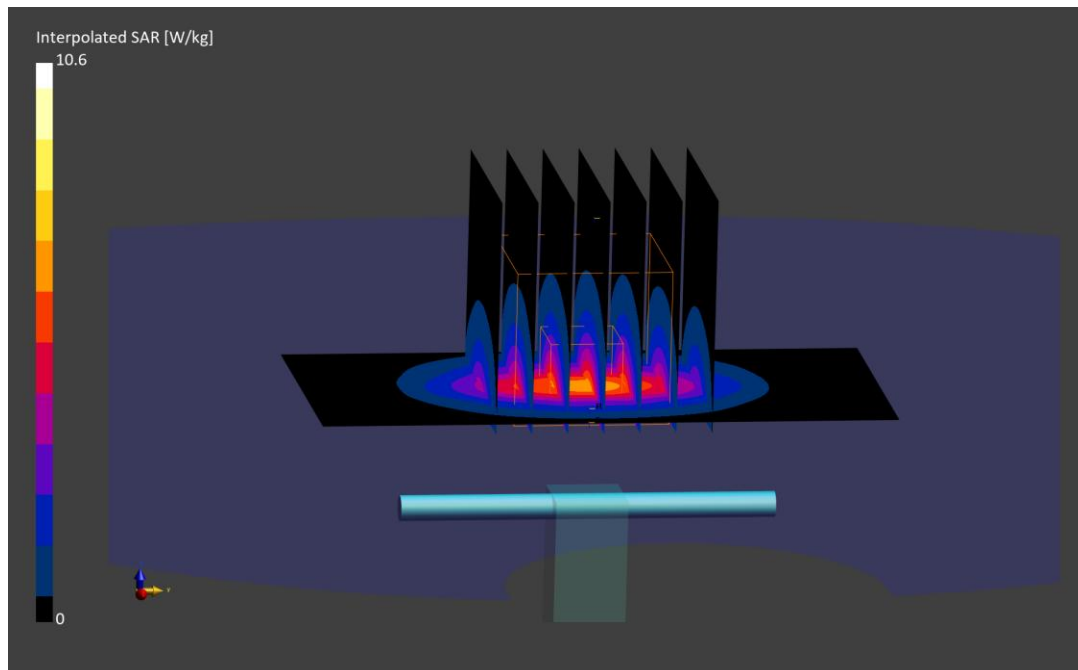

ELEMENT

DUT: Dipole 2450.000 MHz; Type: D2450V2 - SN921

Communication System: UID: 0, CW; Frequency: 2450.000 MHz
Medium: 2450 Head; Medium parameters used:
 $f = 2450.000$ MHz; $\text{cond} = 1.75$ S/m; $\text{perm} = 41.0$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 08/11/2026; Ambient Temp: 22.8°C; Tissue Temp: 19.3°C

Probe: EX3DV4 - SN7532; ConvF:(7.25,7.18,7.99); Calibrated: 2026-04-15
Sensor-Surface: 1.4mm (All points)
Electronics: DAE4 Sn1582; Calibrated: 2026-04-13
Phantom: Twin-SAM V8.0; Serial: 1936
Measurement SW: DASY Module SAR V16.4.0.5005

2450.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 11.0 W/kg

SAR(1 g) = 5.25 W/kg

Deviation (1 g) = 0.57%

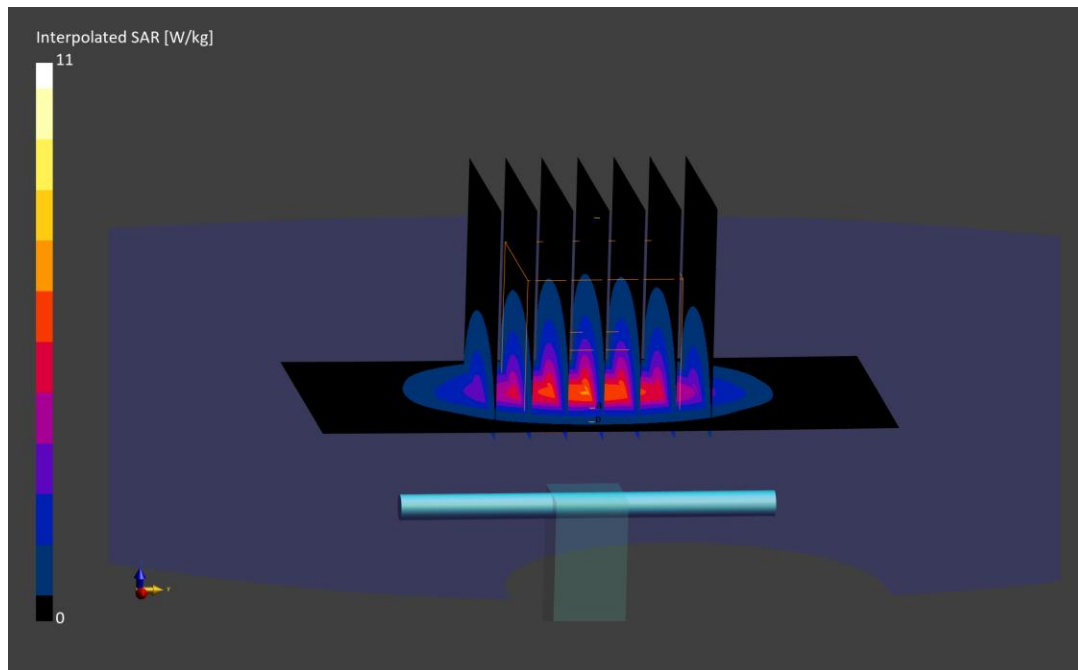

ELEMENT

DUT: Dipole 2600.000 MHz; Type: D2600V2 - SN1069

Communication System: UID: 0, CW; Frequency: 2600.000 MHz
Medium: 2450 Head; Medium parameters used:
 $f = 2600.000$ MHz; $\text{cond} = 1.89$ S/m; $\text{perm} = 40.8$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 07/31/2026; Ambient Temp: 23.5°C; Tissue Temp: 21.4°C

Probe: EX3DV4 - SN7532; ConvF:(7.14,7.07,7.86); Calibrated: 2026-04-15
Sensor-Surface: 1.4mm (All points)
Electronics: DAE4 Sn1582; Calibrated: 2026-04-13
Phantom: Twin-SAM V8.0; Serial: 1936
Measurement SW: DASY Module SAR V16.4.0.5005

2600.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 11.7 W/kg

SAR(1 g) = 5.79 W/kg

Deviation (1 g) = 3.02%

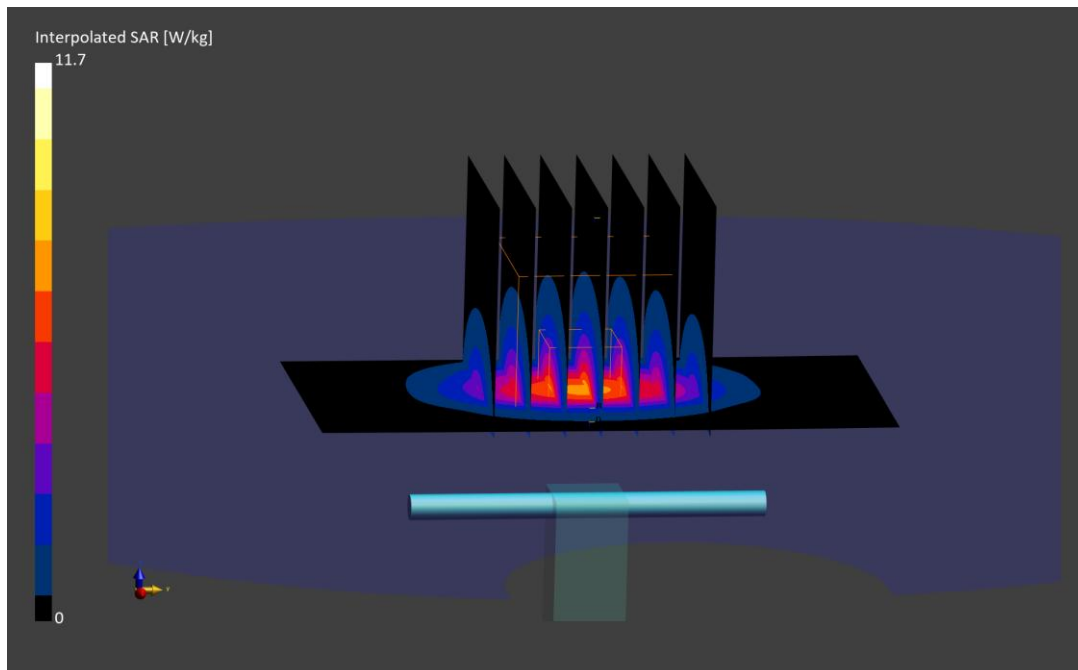

ELEMENT

DUT: Dipole 2600.000 MHz; Type: D2600V2 - SN1069

Communication System: UID: 0, CW; Frequency: 2600.000 MHz
Medium: 2450 Head; Medium parameters used:
 $f = 2600.000$ MHz; $\text{cond} = 1.90$ S/m; $\text{perm} = 39.0$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 08/06/2026; Ambient Temp: 21.5°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN7416; ConvF:(7.06,7.28,7.19); Calibrated: 2026-05-06
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn701; Calibrated: 2026-05-08
Phantom: Twin-SAM V8.0; Serial: 2067
Measurement SW: DASY Module SAR V16.4.0.5005

2600.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 11.5 W/kg

SAR(1 g) = 5.42 W/kg

Deviation (1 g) = -3.56%

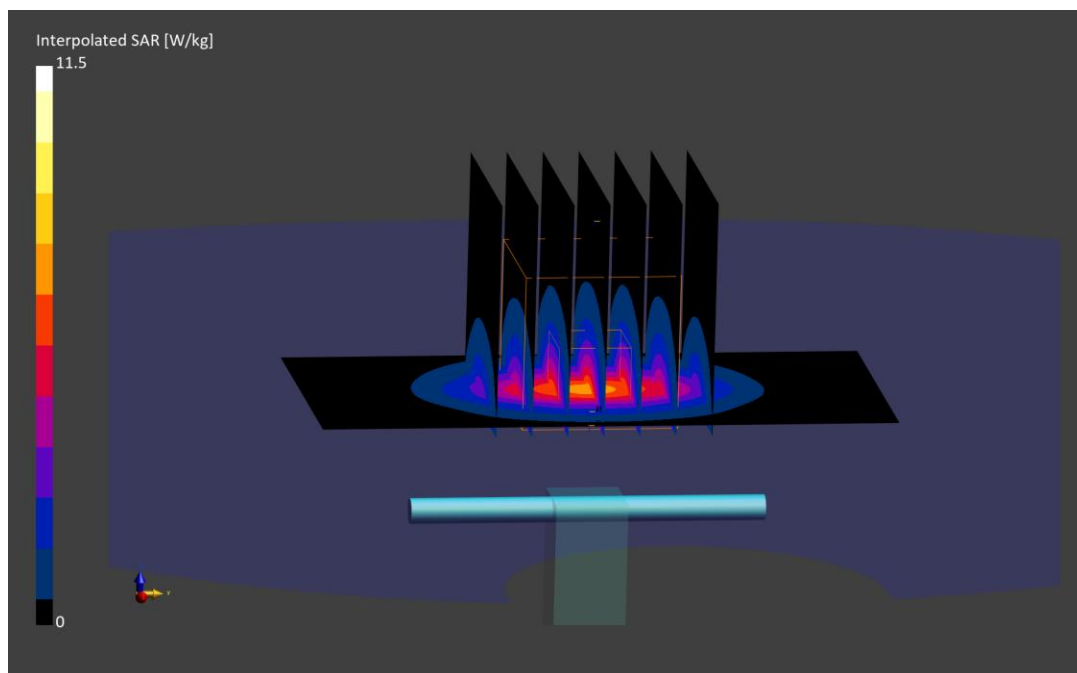

ELEMENT

DUT: Dipole 2600.000 MHz; Type: D2600V2 - SN1069

Communication System: UID: 0, CW; Frequency: 2600.000 MHz
Medium: 2450 Head; Medium parameters used:
 $f = 2600.000$ MHz; $\text{cond} = 1.89$ S/m; $\text{perm} = 40.8$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 08/11/2026; Ambient Temp: 22.8°C; Tissue Temp: 19.3°C

Probe: EX3DV4 - SN7532; ConvF:(7.14,7.07,7.86); Calibrated: 2026-04-15
Sensor-Surface: 1.4mm (All points)
Electronics: DAE4 Sn1582; Calibrated: 2026-04-13
Phantom: Twin-SAM V8.0; Serial: 1936
Measurement SW: DASY Module SAR V16.4.0.5005

2600.0 MHz System Verification at 20.0 dBm (100 mW)

Area Scan (40.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 11.8 W/kg

SAR(1 g) = 5.76 W/kg

Deviation (1 g) = 2.49%

