**MEASUREMENT REPORT****FCC PART 15.407/ ISED RSS-247 802.15.4 ab-NB****Applicant Name:**

Apple Inc.
One Apple Park Way
Cupertino, CA 95014
United States

Date of Testing:

6/10/2026 - 7/24/2026

Test Report Issue Date:

8/7/2026

Test Site/Location:

Element Materials Technology Morgan Hill, CA, USA

Test Report Serial No.:

1C2604100032-11.BCG

FCC ID:

BCG-A3587

IC:

579C-A3587

APPLICANT:

Apple Inc.

Application Type:

Certification

Model/HVIN:

A3587, A3588

EUT Type:

Watch

Frequency:

5728.75 – 5846.25MHz

FCC Classification:

Unlicensed National Information Infrastructure (UNII)

FCC Rule Part(s):

Part 15 Subpart E (15.407)

ISED Specification:

RSS-247 Issue 4

Test Procedure(s):

ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to
C63.10a:2024, KDB 789033 D02 v02r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



RJ Ortanez

Executive Vice President



FCC ID: BCG-A3587 IC: 579C-A3587	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/10/2026 - 7/24/2026	EUT Type: Watch	Approved by: Technical Manager
Test Report S/N: 1C2604100032-11.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 1 of 57

V 12.0 03/03/2026

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Revision Summary

Revision	Date	Comments	Revised By
-	7-25-2026	Initial Release	WKR08886

FCC ID: BCG-A3587 IC: 579C-A3587	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/10/2026 - 7/24/2026	EUT Type: Watch	Approved by: Technical Manager
Test Report S/N: 1C2604100032-11.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 2 of 57

V 12.0 03/03/2026

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.


T A B L E O F C O N T E N T S

1.0	INTRODUCTION	5
1.1	Scope.....	5
1.2	Element Materials Technology Test Location	5
1.3	Test Facility / Accreditations.....	5
2.0	PRODUCT INFORMATION	6
2.1	Equipment Description	6
2.2	Device Capabilities.....	6
2.3	Antenna Description	7
2.4	Test Support Equipment.....	8
2.5	Test Configuration	9
2.6	Software and Firmware	9
2.7	EMI Suppression Device(s)/Modifications.....	9
3.0	DESCRIPTION OF TESTS	10
3.1	Evaluation Procedure	10
3.2	AC Line Conducted Emissions	10
3.3	Radiated Emissions.....	11
3.4	Environmental Conditions.....	11
4.0	ANTENNA REQUIREMENTS	12
5.0	MEASUREMENT UNCERTAINTY	13
6.0	TEST EQUIPMENT CALIBRATION DATA.....	14
7.0	TEST RESULTS	15
7.1	Summary.....	15
7.2	99% Occupied Bandwidth	16
7.3	6 dB Bandwidth	24
7.4	Conducted Output Power Measurement.....	31
7.5	Maximum Power Spectral Density	33
7.6	Radiated Spurious Emission – Above 1GHz.....	40
7.6.1	Radiated Spurious Emission	43
7.6.2	Radiated Band Edge Measurements	46
7.7	Radiated Spurious Emissions – Below 1GHz	49
7.8	AC Line Conducted Emissions Measurement.....	53
8.0	CONCLUSION.....	57


FCC ID: BCG-A3587 IC: 579C-A3587	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/10/2026 - 7/24/2026	EUT Type: Watch	Approved by: Technical Manager
Test Report S/N: 1C2604100032-11.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 3 of 57

V 12.0 03/03/2026

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.



MEASUREMENT REPORT



UNII Band	Tx Frequency [MHz]	Mode (kbps)	Max. Power (mW)	Max. Power (dBm)
3	5728.75 - 5846.25	250	36.898	15.67
		500	37.931	15.79
		1000	39.446	15.96

EUT Overview

FCC ID: BCG-A3587 IC: 579C-A3587	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/10/2026 - 7/24/2026	EUT Type: Watch	Approved by: Technical Manager
Test Report S/N: 1C2604100032-11.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 4 of 57

V 12.0 03/03/2026

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 Element Materials Technology Test Location

These measurement tests were conducted at the Element Materials Technology facility located at 18855 Adams Court, Morgan Hill, CA 95037. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01r01.

1.3 Test Facility / Accreditations

Measurements were performed at Element Materials Technology located in Morgan Hill, CA 95037, U.S.A.

- Element Materials Technology is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Materials Technology facility is a registered test laboratory with the site description on file with ISED (Wireless Test Lab number 22831) and FCC (Designation Number US1163).
- Element Washington DC LLC is a Recognized U.S. Certification Assessment Body (CAB# US0110) for ISED Canada as designed by NIST under the U.S. and Canada Mutual Recognition Agreements (MRAs)

FCC ID: BCG-A3587 IC: 579C-A3587	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/10/2026 - 7/24/2026	EUT Type: Watch	Approved by: Technical Manager
Test Report S/N: 1C2604100032-11.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 5 of 57

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Apple Watch FCC ID: BCG-A3587, IC: 579C-A3587**. The test data contained in this report pertains only to the emissions due to the EUT's 802.15.4 ab-NB transmitter.

Test Device Serial No.: C5HD26VFQD, M2049YQV92, J6QQKH5Y9P, JHYJKCQ7FV, K7W59W7PK9, DLCHSU0001R00018M9, DLCHTA000WY00018MA

2.2 Device Capabilities

This device contains the following capabilities:

Multi-band LTE, 5G NR RedCap (FR1), 802.11b/g/n WLAN, 802.11a/n UNII, 802.15.4 ab-NB, Bluetooth (1x, EDR, HDR4, HDR8, LE1M, LE2M), NFC, UWB, 60.5GHz Transmitter.

Band 3
Frequency (MHz)
5728.75
:
5786.25
:
5846.25

Table 2-1. 802.15.4 ab-NB Frequency of Operations

Notes:

The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section B)2)b) of KDB 789033 D02 v02r01 and ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Measured Duty Cycles		
Mode	FCM	
	Duty Cycle [%]	DCCF [dB]
250kbps	84.72	0.72
500kbps	43.15	3.65
1000kbps	21.04	6.77

Table 2-2. Measured Duty Cycles

FCC ID: BCG-A3587 IC: 579C-A3587	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/10/2026 - 7/24/2026	EUT Type: Watch	Approved by: Technical Manager
Test Report S/N: 1C2604100032-11.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 6 of 57

This device supports simultaneous transmission operations, which allows for multiple transmitters to transmit simultaneously on the same antenna. The table below shows all configurations possible.

Simultaneous Tx Config	Antenna FCM					
	WLAN	Bluetooth	802.15.4a b - NB	LTE/FR1	UNII	UWB
	802.11 b/g/n	BDR, EDR, HDR4/8, LE1/2M	O-QPSK	Mid/High Band	802.11 a/n	Ch.5/Ch.9
Config 1	✓	✗	✗	✓	✗	✓
Config 2	✗	✓	✗	✓	✗	✓
Config 3	✗	✓	✓	✓	✗	✗
Config 4	✓	✗	✓	✓	✗	✗
Config 5	✗	✓	✗	✓	✓	✗
Config 6	✗	✓	✗	✓	✗	✓
Config 7	✓	✗	✗	✓	✗	✗
Config 8	✓	✗	✓	✗	✗	✗
Config 9	✓	✗	✗	✗	✗	✓
Config 10	✗	✓	✗	✗	✓	✗
Config 11	✗	✓	✗	✓	✗	✗
Config 12	✗	✓	✓	✗	✗	✗
Config 13	✗	✓	✗	✗	✗	✓
Config 14	✗	✗	✓	✓	✗	✗
Config 15	✗	✗	✗	✓	✓	✗
Config 16	✗	✗	✗	✓	✗	✓

Table 2-3. Simultaneous Transmission Configurations

✓ = Support; ✗ = Not Support

Note:

All the above simultaneous transmission configurations have been tested and the worst-case configuration was found to be config 5 and reported in RF UNII, RF Bluetooth, and RF Part 27b/RSS-199 test reports.

2.3 Antenna Description

The following antenna gain provided by the manufacturer was used for testing. The validity of the calculated results is based on the accuracy of the information provided.

Frequency [MHz]	Antenna Gain (dBi)
	Antenna FCM
5728.75 – 5846.25	-3.90

Table 2-4. Highest Antenna Gain

FCC ID: BCG-A3587 IC: 579C-A3587	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/10/2026 - 7/24/2026	EUT Type: Watch	Approved by: Technical Manager
Test Report S/N: 1C2604100032-11.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 7 of 57

2.4 Test Support Equipment

1	Apple Macbook	Model:	A1398	S/N:	FVFDHG8TP3XY
	w/AC/DC Adapter	Model:	A1435	S/N:	N/A
2	Apple USB-C cable	Model:	N/A	S/N:	N/A
	w/ Charging Dock	Model:	A2921	S/N:	DQ8137601MY08V22F
	w/ Cradle	Model:	N/A	S/N:	CYV142700BEE1EN01MP1P
3	Apple Magnetic Charger	Model:	A3277	S/N:	DLCHTU0006G0001PGP
	Apple Magnetic Charger	Model:	A2879	S/N:	DLCH5T0012A00000WB
4	Pathfinder Parkranger	Model:	920-17801-01	S/N:	DLCHKC0004A00018LL
	SiP Socket	Model:	CYG760-PF	S/N:	DLCHM3000Y90001BRZ
5	DC Power Supply	Model:	KPS3010D	S/N:	N/A

Table 2-5. Test Support Equipment List

FCC ID: BCG-A3587 IC: 579C-A3587	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/10/2026 - 7/24/2026	EUT Type: Watch	Approved by: Technical Manager
Test Report S/N: 1C2604100032-11.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 8 of 57

V 12.0 03/03/2026

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

2.5 Test Configuration

The EUT was tested per the guidance of ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 and KDB 789033 D02 v02r01. ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 3.2 for AC line conducted emissions test setups, 3.3 for radiated emissions test setups, and, 7.2, 7.3, and 7.4 for antenna port conducted emissions test setups.

The worst case configuration was investigated for all combinations of the three materials, aluminum, titanium, and ceramic and various types of wristbands, metal and non-metal wristbands. The EUT was also investigated with and without wireless charger. The worst case configuration found was used for all testing.

For emissions from 1GHz – 18GHz, low, mid, and high channels were tested with highest power and worst case configuration. The emissions below 1GHz and above 18GHz were tested with the highest transmitting power and the worst case channel.

The EUT was manipulated through three orthogonal planes of X-orientation (flatbed), Y-orientation (landscape), and Z-orientation (portrait) during the testing. Only the worst case emissions were reported in this test report.

For AC line conducted and radiated test below 1GHz, following configurations were investigated and EUT powered by AC/DC adaptor was the worst case.

- EUT powered by AC/DC adaptor via USB-C cable with magnetic charger.
- EUT powered by host PC via USB-C cable with magnetic charger.

2.6 Software and Firmware

The test was conducted with firmware version watchOS 27 installed on the EUT.

2.7 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

FCC ID: BCG-A3587 IC: 579C-A3587	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/10/2026 - 7/24/2026	EUT Type: Watch	Approved by: Technical Manager
Test Report S/N: 1C2604100032-11.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 9 of 57

V 12.0 03/03/2026

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024) and the guidance provided in KDB 789033 D02 v02r01 were used in the measurement of the EUT.

Deviation from measurement procedure.....None

3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 7m x 3.66m x 2.7m shielded enclosure. The shielded enclosure is manufactured by AP Americas. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-6. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is EPCOS 2X60A Power Line Filter (100dB Attenuation, 14kHz-18GHz) and the two EPCOs 2X48A filters (100dB Minimum Insertion Loss, 14kHz - 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 7.8. Automated test software was used to perform the AC line conducted emissions testing. Automated measurement software utilized is Rohde & Schwarz EMC32, Version 10.50.40.

FCC ID: BCG-A3587 IC: 579C-A3587	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/10/2026 - 7/24/2026	EUT Type: Watch	Approved by: Technical Manager
Test Report S/N: 1C2604100032-11.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 10 of 57

V 12.0 03/03/2026

3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

Per KDB 414788 D01 v01r01, radiated emission test sites other than open-field test sites (e.g., shielded anechoic chambers), may be employed for emission measurements below 30MHz if characterized so that the measurements correspond to those obtained at an open-field test site. To determine test site equivalency, a reference sample transmitting at 149kHz was measured on an open field test site (asphalt with no ground plane) and then measured in the 3m semi-anechoic chamber. A calibrated 60cm loop antenna was used while the reference device was rotated through the X, Y and Z axis in order to capture the worst case level. A maximum deviation of 2.77dB at 149kHz was measured when comparing the 3 meter semi-anechoic chamber to the open field site.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: BCG-A3587 IC: 579C-A3587	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/10/2026 - 7/24/2026	EUT Type: Watch	Approved by: Technical Manager
Test Report S/N: 1C2604100032-11.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 11 of 57

V 12.0 03/03/2026

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The EUT complies with the requirement of §15.203.

FCC ID: BCG-A3587 IC: 579C-A3587	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/10/2026 - 7/24/2026	EUT Type: Watch	Approved by: Technical Manager
Test Report S/N: 1C2604100032-11.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 12 of 57

V 12.0 03/03/2026

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.23-2012. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ($\pm$ dB)
Conducted Bench Top Measurements	2.00
Line Conducted Disturbance	1.88
Radiated Disturbance (<30MHz)	4.24
Radiated Disturbance (30MHz - 1GHz)	4.96
Radiated Disturbance (1 - 18GHz)	5.18
Radiated Disturbance (>18GHz)	5.18

FCC ID: BCG-A3587 IC: 579C-A3587	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/10/2026 - 7/24/2026	EUT Type: Watch	Approved by: Technical Manager
Test Report S/N: 1C2604100032-11.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 13 of 57

V 12.0 03/03/2026

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	N9020A	MXA Signal Analyzer	7/7/2025	Biennial	7/7/2027	MY56470202
Anritsu	ML2496A	Power Meter	4/6/2026	Annual	4/6/2027	1351001
Anritsu	MA2411B	Pulse Power Sensor	4/6/2026	Annual	4/6/2027	1315051
ATM	180-442-KF	20dB Nominal Gain Horn Antenna	3/31/2026	Annual	3/31/2027	T058601-02
ETS-Lindgren	3117	Double Ridged Guide Antenna (1-18 GHz)	4/21/2026	Annual	4/21/2027	218555
Keysight Technology	N9040B	UXA Signal Analyzer	3/19/2026	Annual	3/19/2027	MY60080210
Fairview Microwave/MCL	FMCA1975-36/BW-K10-2W44+	30MHz-40GHz RF Cable/Attenuator *	6/10/2026	Annual	6/10/2027	-
Rohde & Schwarz	TS-PR18	Pre-Amplifier (1GHz - 18GHz)	8/6/2025	Annual	8/6/2026	101639
Rohde & Schwarz	FSW43	Spectrum Analyzer 2Hz to 43GHz	8/5/2025	Annual	8/5/2026	104093
Rohde & Schwarz	ESW44	EMI Test Receiver 2Hz to 44 GHz	3/11/2026	Annual	3/11/2027	101716
Rohde & Schwarz	TS-PR8	Pre-Amplifier (30MHz - 8GHz)	10/14/2025	Annual	10/14/2026	102328
Rohde & Schwarz	TS-PR1840	Pre-Amplifier (18GHz - 40GHz)	7/17/2026	Annual	7/17/2027	100052
Rohde & Schwarz	HFH2-Z2	Loop Antenna	6/26/2025	Annual	6/26/2026	100519
Rohde & Schwarz	HFH2-Z2	Loop Antenna	6/25/2026	Annual	6/25/2027	100546
Rohde & Schwarz	ENV216	Two-Line V-Network	8/18/2025	Annual	8/18/2026	101363
Schwarzbeck	3142E	Bilog Antenna (30MHz - 6GHz)	9/30/2025	Annual	9/30/2026	224569

Table 6-1. Test Equipment List

Note:

- For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
- * Denotes passive equipment that have been internally verified/calibrated.

FCC ID: BCG-A3587 IC: 579C-A3587	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/10/2026 - 7/24/2026	EUT Type: Watch	Approved by: Technical Manager
Test Report S/N: 1C2604100032-11.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 14 of 57

V 12.0 03/03/2026

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.0 TEST RESULTS

7.1 Summary

Company Name: Apple Inc.

FCC ID: BCG-A3587

FCC Classification: Unlicensed National Information Infrastructure (UNII)

IC: 579C-A3587

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.407(e)	RSS-247 [7.3.4.2]	6dB Bandwidth	>500kHz(5725-5850MHz)	CONDUCTED	PASS	Section 7.3
2.1049	RSS-Gen [5.1]	99% Occupied Bandwidth	N/A		N/A	Section 7.2
15.407 (a.3.i)	RSS-247 [7.3.4.3(a)]	Maximum Conducted Output Power	Maximum conducted powers must meet the limits detailed in 15.407 (a) (RSS-247 [7.3])		PASS	Section 7.4
15.407 (a.3.i)	RSS-247 [7.3.4.3(b)]	Maximum Power Spectral Density	Maximum power spectral density must meet the limits detailed in 15.407 (a) (RSS-247 [7.3])		PASS	Section 7.5
15.407(b.4)	RSS-247 [7.3.4.4]	Undesirable Emissions	Undesirable emissions must meet the limits detailed in 15.407(b) (RSS-247 [7.3])	RADIATED	PASS	Section 7.6
15.205, 15.407(b.4)	RSS-Gen [7.4.3]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-Gen [7.4.3])		PASS	Section 7.6, 7.7
15.207	RSS-Gen [7.4.2]	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 (RSS-Gen [7.4.2]) limits	AC LINE CONDUCTED	PASS	Section 7.8

Table 7-1. Summary of Test Results

Notes:

- All channels, modes, and modulations/data rates were investigated among UNII-3. The test results shown in the following sections represent the worst case emissions.
- The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- For radiated testing, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element “Chamber Automation,” Version 3.6.5.
- For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element “Conducted Automation,” Version 1.5.0.

FCC ID: BCG-A3587 IC: 579C-A3587	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/10/2026 - 7/24/2026	EUT Type: Watch	Approved by: Technical Manager
Test Report S/N: 1C2604100032-11.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 15 of 57

7.2 99% Occupied Bandwidth

Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Procedure Used

ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 – Section 11.8.2 Option 1
KDB 789033 D02 v02r01 – Section D
RSS-Gen [5.1]

Test Settings

1. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. Span = between 1.5x to 5x the OBW
3. RBW = in the range of 1- 5% of the OBW
4. VBW $\geq$ 3 x RBW
5. Detector = Peak
6. Trace mode = max hold
7. Sweep = auto couple
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

FCC ID: BCG-A3587 IC: 579C-A3587	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/10/2026 - 7/24/2026	EUT Type: Watch	Approved by: Technical Manager
Test Report S/N: 1C2604100032-11.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 16 of 57

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-1. Test Instrument & Measurement Setup

Test Notes

None.

FCC ID: BCG-A3587 IC: 579C-A3587	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/10/2026 - 7/24/2026	EUT Type: Watch	Approved by: Technical Manager
Test Report S/N: 1C2604100032-11.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 17 of 57

V 12.0 03/03/2026

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

99% Occupied Bandwidth Measurements

	Frequency [MHz]	Data Rate [Mbps]	Mode	Data Rate [kbps]	Measured 99% Occupied Bandwidth [MHz]
Band 3	5728.75	1	O-QPSK	250	2.50
	5786.25	24	O-QPSK	250	2.50
	5846.25	48	O-QPSK	250	2.51

Table 7-2. Conducted Occupied Bandwidth Measurements (250kbps)

	Frequency [MHz]	Data Rate [Mbps]	Mode	Data Rate [kbps]	Measured 99% Occupied Bandwidth [MHz]
Band 3	5728.75	1	O-QPSK	500	2.42
	5786.25	24	O-QPSK	500	2.43
	5846.25	48	O-QPSK	500	2.44

Table 7-3. Conducted Occupied Bandwidth Measurements (500kbps)

	Frequency [MHz]	Data Rate [Mbps]	Mode	Data Rate [kbps]	Measured 99% Occupied Bandwidth [MHz]
Band 3	5728.75	1	O-QPSK	1000	2.53
	5786.25	24	O-QPSK	1000	2.54
	5846.25	48	O-QPSK	1000	2.55

Table 7-4. Conducted Occupied Bandwidth Measurements (1000kbps)

FCC ID: BCG-A3587 IC: 579C-A3587	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/10/2026 - 7/24/2026	EUT Type: Watch	Approved by: Technical Manager
Test Report S/N: 1C2604100032-11.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 18 of 57

V 12.0 03/03/2026



Plot 7-1. 99% OBW (O-QPSK, 5728.75 MHz, 250kbps)




Plot 7-2. 99% OBW (O-QPSK, 5786.25 MHz, 250kbps)

FCC ID: BCG-A3587 IC: 579C-A3587	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/10/2026 - 7/24/2026	EUT Type: Watch	Approved by: Technical Manager
Test Report S/N: 1C2604100032-11.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 19 of 57



Plot 7-3. 99% OBW (O-QPSK, 5846.25 MHz, 250kbps)

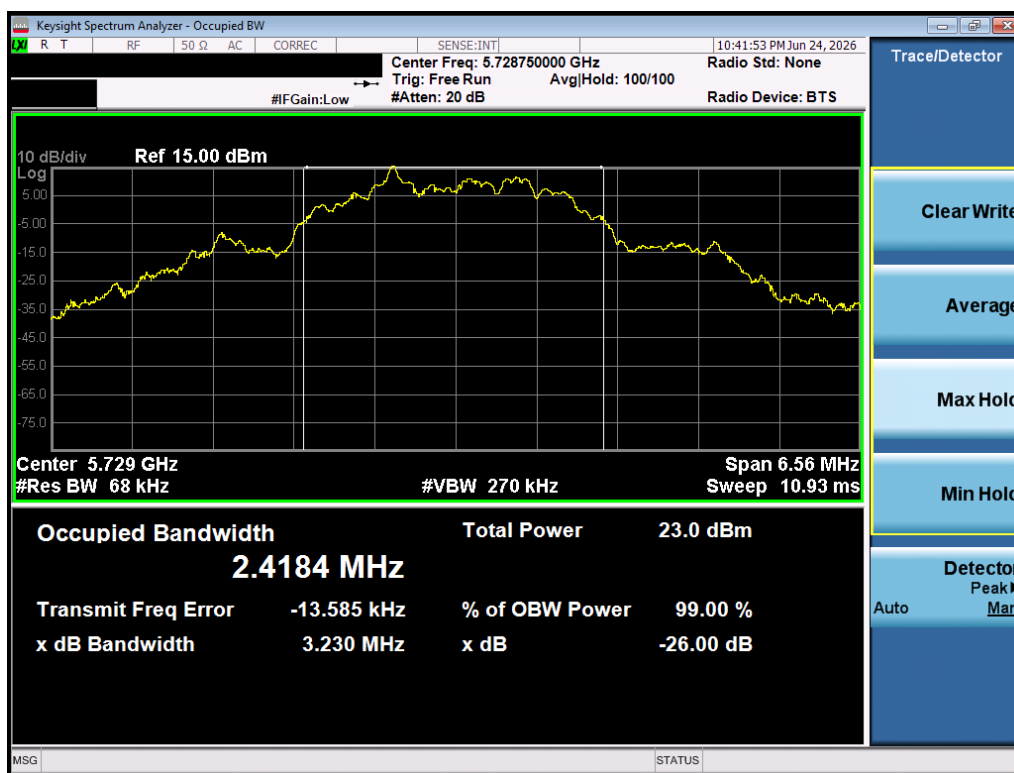

Plot 7-4. 99% OBW (O-QPSK, 5728.75 MHz, 500kbps)

FCC ID: BCG-A3587 IC: 579C-A3587	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/10/2026 - 7/24/2026	EUT Type: Watch	Approved by: Technical Manager
Test Report S/N: 1C2604100032-11.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 20 of 57



Plot 7-5. 99% OBW (O-QPSK, 5786.25 MHz, 500kbps)



Plot 7-6. 99% OBW (O-QPSK, 5846.25 MHz, 500kbps)

FCC ID: BCG-A3587 IC: 579C-A3587	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/10/2026 - 7/24/2026	EUT Type: Watch	Approved by: Technical Manager
Test Report S/N: 1C2604100032-11.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 21 of 57



Plot 7-7. 99% OBW (O-QPSK, 5728.75 MHz, 1000kbps)



Plot 7-8. 99% OBW (O-QPSK, 5786.25 MHz, 1000kbps)

FCC ID: BCG-A3587 IC: 579C-A3587	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/10/2026 - 7/24/2026	EUT Type: Watch	Approved by: Technical Manager
Test Report S/N: 1C2604100032-11.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 22 of 57



Plot 7-9. 99% OBW (O-QPSK, 5846.25 MHz, 1000kbps)

FCC ID: BCG-A3587 IC: 579C-A3587	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/10/2026 - 7/24/2026	EUT Type: Watch	Approved by: Technical Manager
Test Report S/N: 1C2604100032-11.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 23 of 57

V 12.0 03/03/2026

7.3 6 dB Bandwidth

Test Overview and Limit

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 and KDB 789033 D02 v02r01, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 6dB bandwidth.

In the 5.725 – 5.850 GHz band, the 6dB bandwidth must be ≥ 500 kHz.

Test Procedure Used

ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 – Subclause 12.5.1
KDB 789033 D02 v02r01 – Section C

Test Settings

1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 6$. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 100 kHz
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-2. Test Instrument & Measurement Setup

Test Notes

None.

FCC ID: BCG-A3587 IC: 579C-A3587	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/10/2026 - 7/24/2026	EUT Type: Watch	Approved by: Technical Manager
Test Report S/N: 1C2604100032-11.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 24 of 57

6 dB Measurements

	Frequency [MHz]	Data Rate [Mbps]	Mode	Data Rate [kbps]	Measured 6dB Bandwidth [MHz]	Minimum 6dB Bandwidth [MHz]	Pass / Fail
Band 3	5728.75	1	O-QPSK	250	1.64	0.50	Pass
	5786.25	24	O-QPSK	250	1.64	0.50	Pass
	5846.25	48	O-QPSK	250	1.64	0.50	Pass

Table 7-5. Conducted BW Measurements (250kbps)

	Frequency [MHz]	Data Rate [Mbps]	Mode	Data Rate [kbps]	Measured 6dB Bandwidth [MHz]	Minimum 6dB Bandwidth [MHz]	Pass / Fail
Band 3	5728.75	1	O-QPSK	500	1.30	0.50	Pass
	5786.25	24	O-QPSK	500	1.30	0.50	Pass
	5846.25	48	O-QPSK	500	1.30	0.50	Pass

Table 7-6. Conducted BW Measurements (500kbps)

	Frequency [MHz]	Data Rate [Mbps]	Mode	Data Rate [kbps]	Measured 6dB Bandwidth [MHz]	Minimum 6dB Bandwidth [MHz]	Pass / Fail
Band 3	5728.75	1	O-QPSK	1000	1.62	0.50	Pass
	5786.25	24	O-QPSK	1000	1.62	0.50	Pass
	5846.25	48	O-QPSK	1000	1.63	0.50	Pass

Table 7-7. Conducted BW Measurements (1000kbps)

FCC ID: BCG-A3587 IC: 579C-A3587	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/10/2026 - 7/24/2026	EUT Type: Watch	Approved by: Technical Manager
Test Report S/N: 1C2604100032-11.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 25 of 57

V 12.0 03/03/2026



Plot 7-10. 6dB BW (O-QPSK, 5728.75 MHz, 250kbps)



Plot 7-11. 6dB BW (O-QPSK, 5786.25 MHz, 250kbps)

FCC ID: BCG-A3587 IC: 579C-A3587	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/10/2026 - 7/24/2026	EUT Type: Watch	Approved by: Technical Manager
Test Report S/N: 1C2604100032-11.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 26 of 57




Plot 7-12. 6dB BW (O-QPSK, 5846.25 MHz, 250kbps)



Plot 7-13. 6dB BW (O-QPSK, 5728.75 MHz, 500kbps)

FCC ID: BCG-A3587 IC: 579C-A3587	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/10/2026 - 7/24/2026	EUT Type: Watch	Approved by: Technical Manager
Test Report S/N: 1C2604100032-11.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 27 of 57

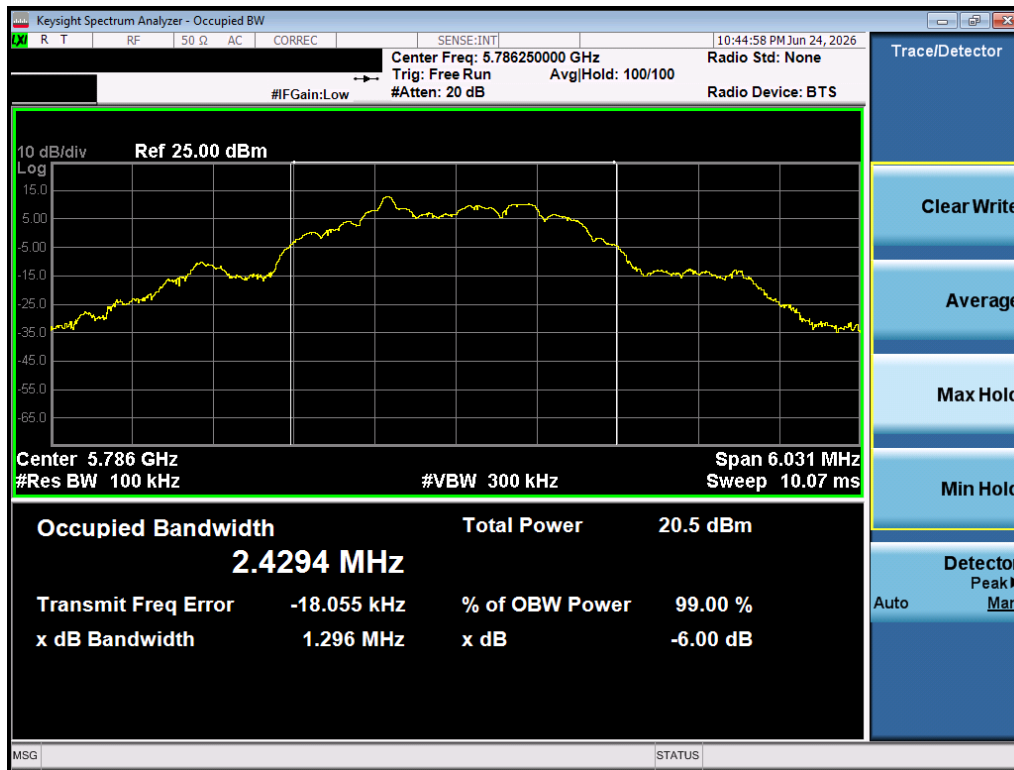

Plot 7-14. 6dB BW (O-QPSK, 5786.25 MHz, 500kbps)



Plot 7-15. 6dB BW (O-QPSK, 5846.25 MHz, 500kbps)

FCC ID: BCG-A3587 IC: 579C-A3587	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/10/2026 - 7/24/2026	EUT Type: Watch	Approved by: Technical Manager
Test Report S/N: 1C2604100032-11.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 28 of 57




Plot 7-16. 6dB BW (O-QPSK, 5728.75 MHz, 1000kbps)



Plot 7-17. 6dB BW (O-QPSK, 5786.25 MHz, 1000kbps)

FCC ID: BCG-A3587 IC: 579C-A3587	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/10/2026 - 7/24/2026	EUT Type: Watch	Approved by: Technical Manager
Test Report S/N: 1C2604100032-11.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 29 of 57

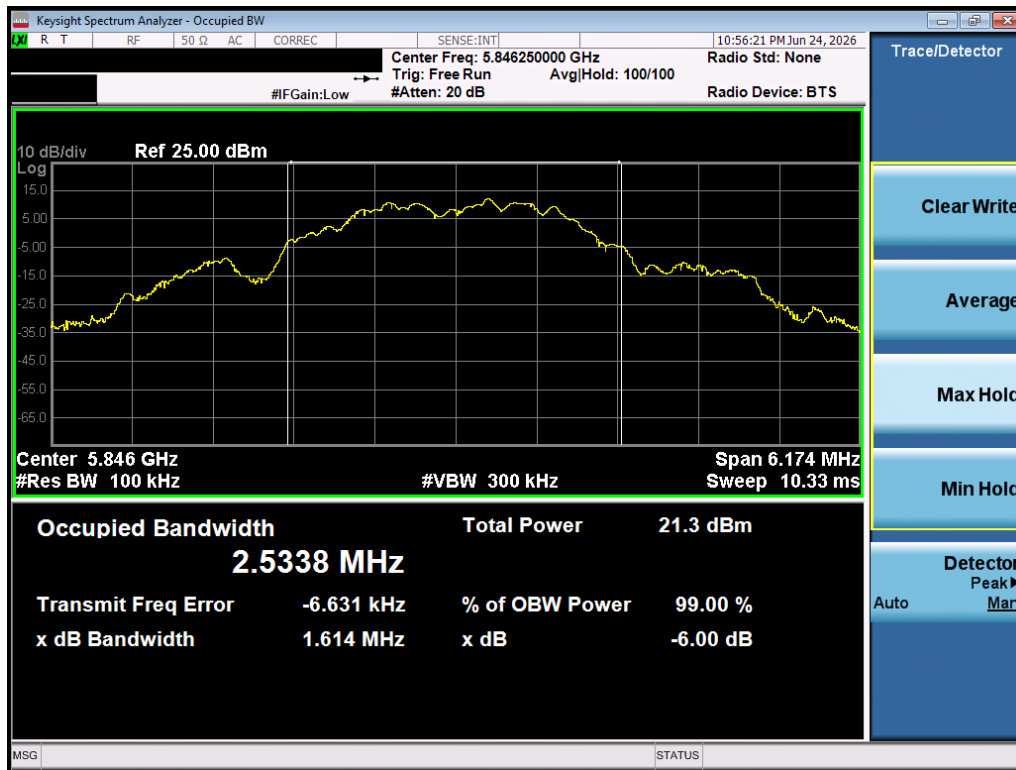

Plot 7-18. 6dB BW (O-QPSK, 5846.25 MHz, 1000kbps)

FCC ID: BCG-A3587 IC: 579C-A3587	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/10/2026 - 7/24/2026	EUT Type: Watch	Approved by: Technical Manager
Test Report S/N: 1C2604100032-11.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 30 of 57

V 12.0 03/03/2026

7.4 Conducted Output Power Measurement

Test Overview and Limits

A transmitter antenna terminal of the EUT is connected to the input of an RF pulse power sensor. Measurement is made using a broadband average power meter while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 and KDB 789033 D02 v02r01, and at the appropriate frequencies.

In the 5.725 – 5.850 GHz band, the maximum permissible conducted output power is 1W (30dBm).

Test Procedure Used

ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 – Subclause 12.4.3.2 Method PM-G
KDB 789033 D02 v02r01 – Section E)3)b) Method PM-G

Test Settings

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-3. Test Instrument & Measurement Setup

Test Notes

None

FCC ID: BCG-A3587 IC: 579C-A3587	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/10/2026 - 7/24/2026	EUT Type: Watch	Approved by: Technical Manager
Test Report S/N: 1C2604100032-11.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 31 of 57

V 12.0 03/03/2026

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Conducted Output Power Measurements

Frequency [MHz]	Channel No.	Detector	Conducted Powers [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
			250kbps	500kbps	1000kbps		
5728.75	1	AVG	15.67	15.79	15.95	30.00	-14.05
5786.25	24	AVG	15.66	15.78	15.96	30.00	-14.04
5848.75	48	AVG	15.64	15.77	15.93	30.00	-14.07

Table 7-8. Maximum Conducted Output Power

FCC ID: BCG-A3587 IC: 579C-A3587	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/10/2026 - 7/24/2026	EUT Type: Watch	Approved by: Technical Manager
Test Report S/N: 1C2604100032-11.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 32 of 57

V 12.0 03/03/2026

7.5 Maximum Power Spectral Density

Test Overview and Limit

The spectrum analyzer was connected to the antenna terminal while the EUT was operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 and KDB 789033 D02 v02r01, and at the appropriate frequencies. Method SA-1, as defined in ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 and KDB 789033 D02 v02r01, was used to measure the power spectral density.

In the 5.725 – 5.850 GHz band, the maximum permissible power spectral density is 30dBm/500kHz.

Test Procedure Used

ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 – Subclause 12.4.2.2
KDB 789033 D02 v02r01 – Section F

Test Settings

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire emission bandwidth of the signal
3. RBW = 500 kHz
4. VBW $\geq$ 3 MHz
5. Number of sweep points $\geq 2 \times$ (span/RBW)
6. Sweep time = auto
7. Detector = power averaging (RMS)
8. Trigger was set to free run for all modes
9. Trace was averaged over 100 sweeps
10. The peak search function of the spectrum analyzer was used to find the peak of the spectrum.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-4. Test Instrument & Measurement Setup

Test Notes

1. The duty cycle correction factor (DCCF) has been applied as an amplitude offset in the spectrum analyzer to ensure the required correction is accurately reflected in the measured Power Spectral Density (PSD). The offset value is indicated on each PSD plot.

FCC ID: BCG-A3587 IC: 579C-A3587	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/10/2026 - 7/24/2026	EUT Type: Watch	Approved by: Technical Manager
Test Report S/N: 1C2604100032-11.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 33 of 57

Power Spectral Density Measurements

	Frequency [MHz]	Channel No.	Mode	Data Rate [kbps]	Measured Power Density [dBm/500kHz]	Max Permissible Power Density [dBm/500kHz]	Margin [dB]
Band 3	5728.75	1	O-QPSK	250	13.52	30.00	-16.48
	5786.25	24	O-QPSK	250	13.35	30.00	-16.65
	5846.25	48	O-QPSK	250	13.61	30.00	-16.39

Table 7-9. Power Spectral Density Measurements (250kbps)

	Frequency [MHz]	Channel No.	Mode	Data Rate [kbps]	Measured Power Density [dBm/500kHz]	Max Permissible Power Density [dBm/500kHz]	Margin [dB]
Band 3	5728.75	1	O-QPSK	500	15.91	30.00	-14.09
	5786.25	24	O-QPSK	500	16.22	30.00	-13.78
	5846.25	48	O-QPSK	500	16.31	30.00	-13.69


Table 7-10. Power Spectral Density Measurements (500kbps)

	Frequency [MHz]	Channel No.	Mode	Data Rate [kbps]	Measured Power Density [dBm/500kHz]	Max Permissible Power Density [dBm/500kHz]	Margin [dB]
Band 3	5728.75	1	O-QPSK	1000	15.00	30.00	-15.00
	5786.25	24	O-QPSK	1000	14.78	30.00	-15.22
	5846.25	48	O-QPSK	1000	15.11	30.00	-14.89


Table 7-11. Power Spectral Density Measurements (1000kbps)

FCC ID: BCG-A3587 IC: 579C-A3587	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/10/2026 - 7/24/2026	EUT Type: Watch	Approved by: Technical Manager
Test Report S/N: 1C2604100032-11.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 34 of 57

V 12.0 03/03/2026

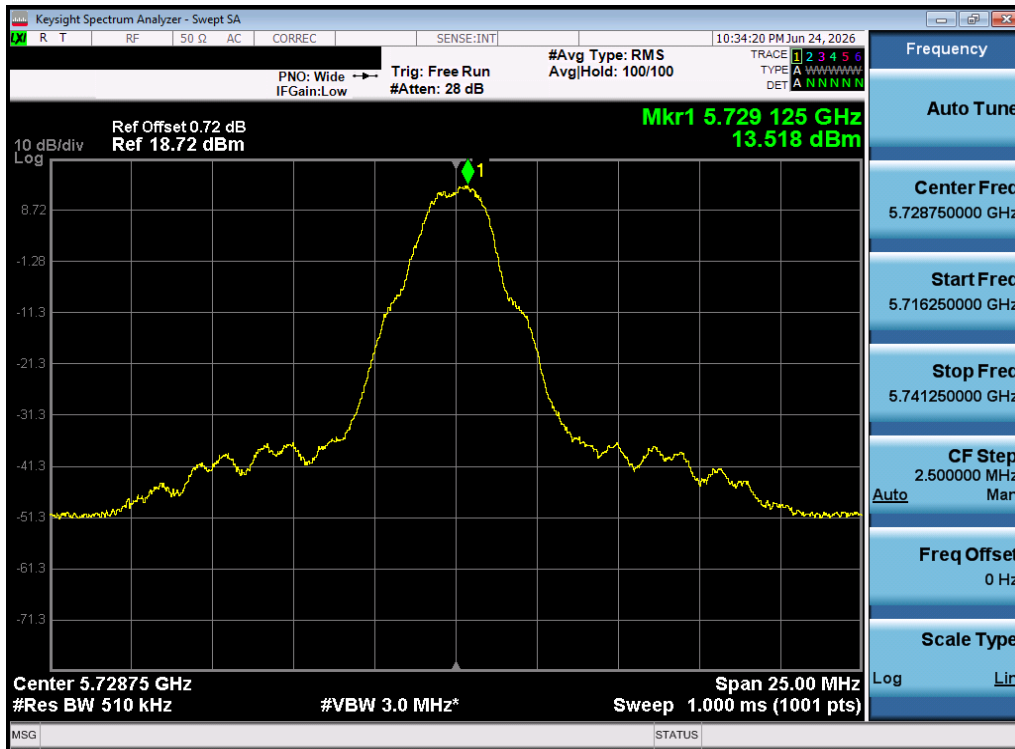


Plot 7-19. PSD (O-QPSK, 5728.75 MHz, 250kbps)

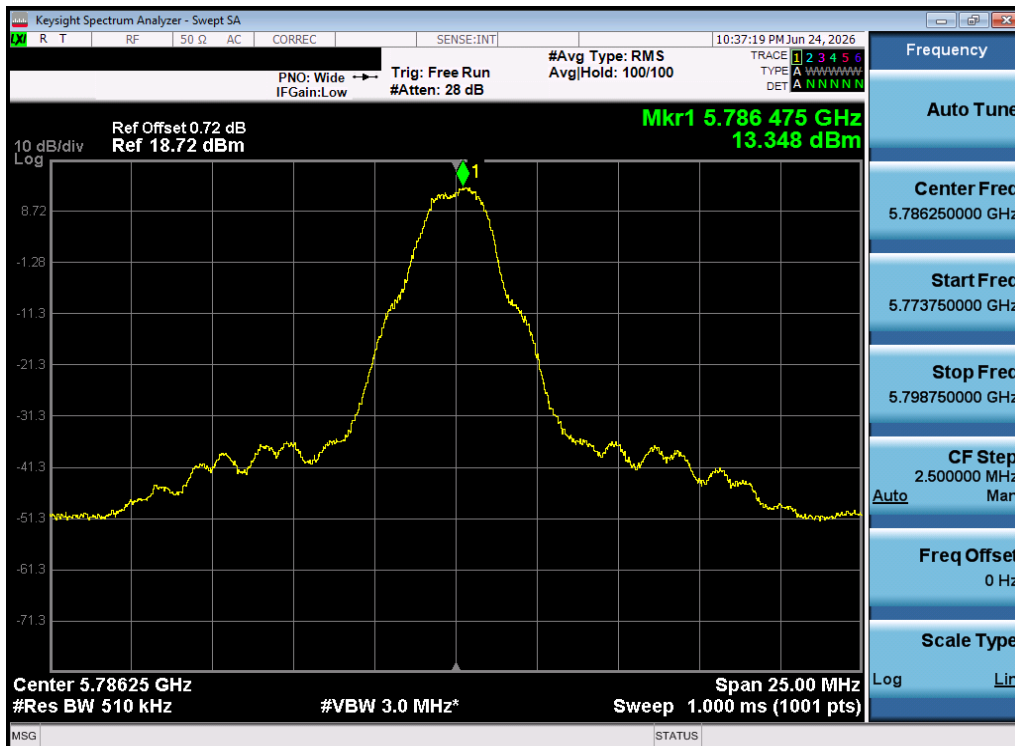


Plot 7-20. PSD (O-QPSK, 5786.25 MHz, 250kbps)

FCC ID: BCG-A3587 IC: 579C-A3587	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/10/2026 - 7/24/2026	EUT Type: Watch	Approved by: Technical Manager
Test Report S/N: 1C2604100032-11.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 35 of 57

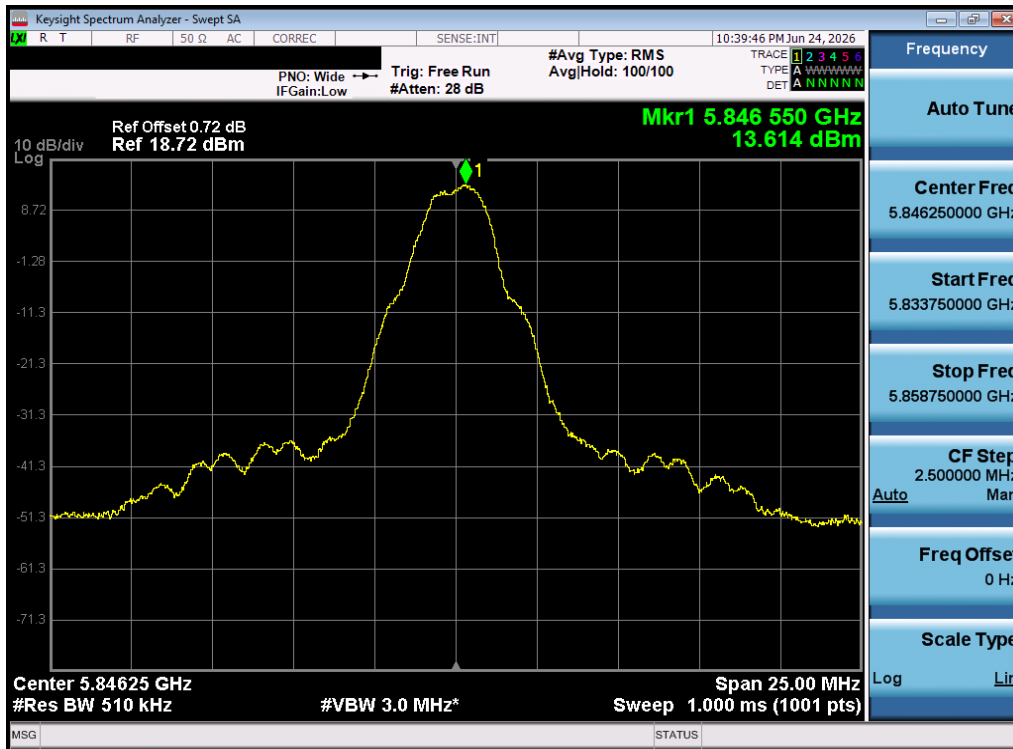


Plot 7-21. PSD (O-QPSK, 5846.25 MHz, 250kbps)

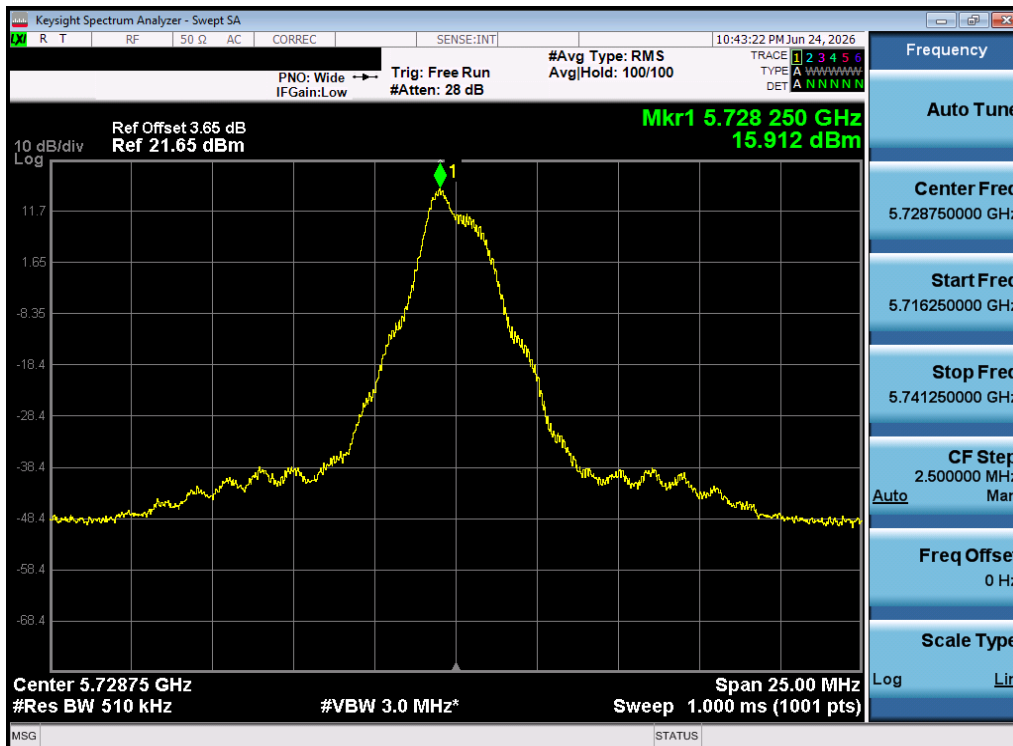


Plot 7-22. PSD (O-QPSK, 5728.75 MHz, 500kbps)

FCC ID: BCG-A3587 IC: 579C-A3587	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/10/2026 - 7/24/2026	EUT Type: Watch	Approved by: Technical Manager
Test Report S/N: 1C2604100032-11.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 36 of 57

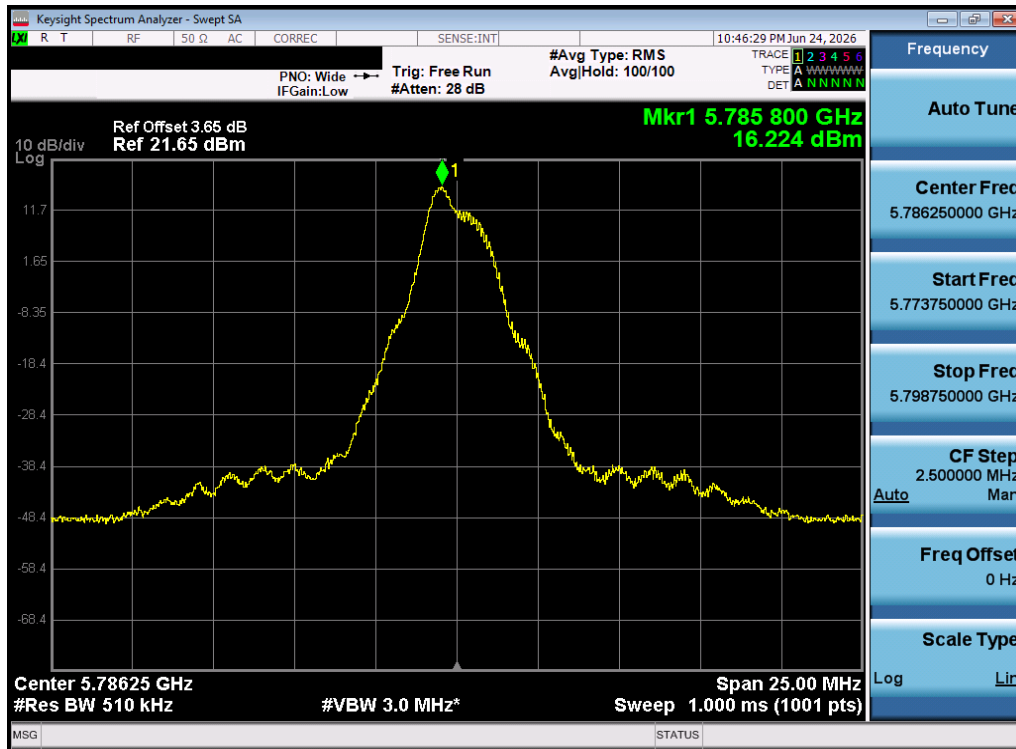


Plot 7-23. PSD (O-QPSK, 5786.25 MHz, 500kbps)

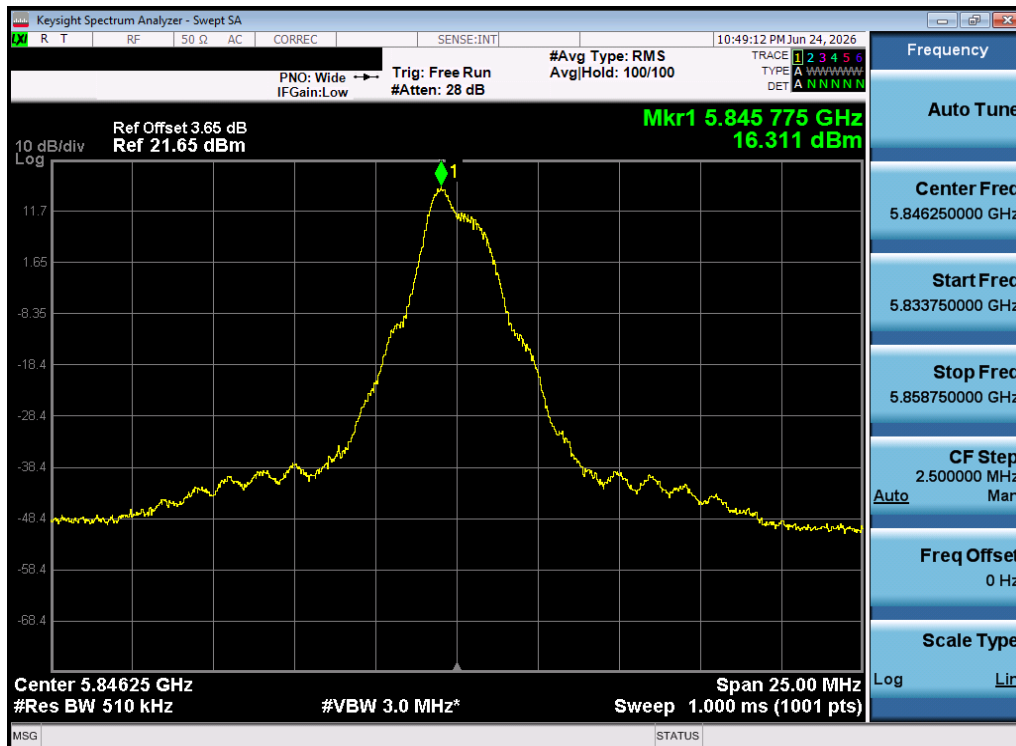


Plot 7-24. PSD (O-QPSK, 5846.25 MHz, 500kbps)

FCC ID: BCG-A3587 IC: 579C-A3587	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/10/2026 - 7/24/2026	EUT Type: Watch	Approved by: Technical Manager
Test Report S/N: 1C2604100032-11.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 37 of 57

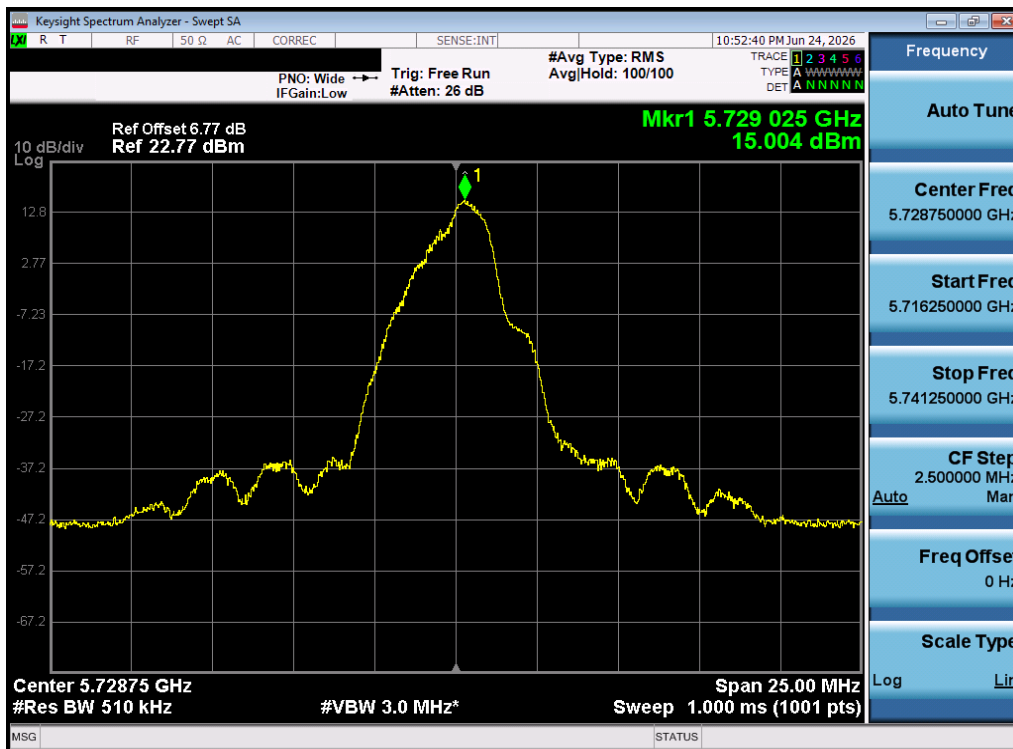


Plot 7-25. PSD (O-QPSK, 5728.75 MHz, 1000kbps)

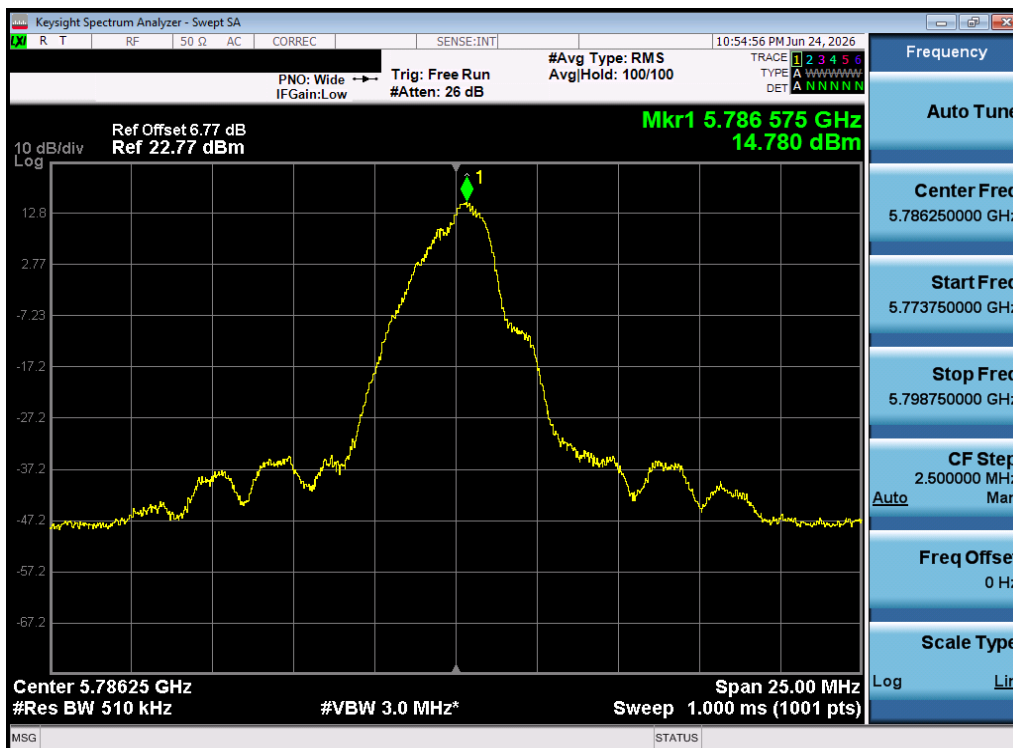

Plot 7-26. PSD (O-QPSK, 5786.25 MHz, 1000kbps)

FCC ID: BCG-A3587 IC: 579C-A3587	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/10/2026 - 7/24/2026	EUT Type: Watch	Approved by: Technical Manager
Test Report S/N: 1C2604100032-11.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 38 of 57

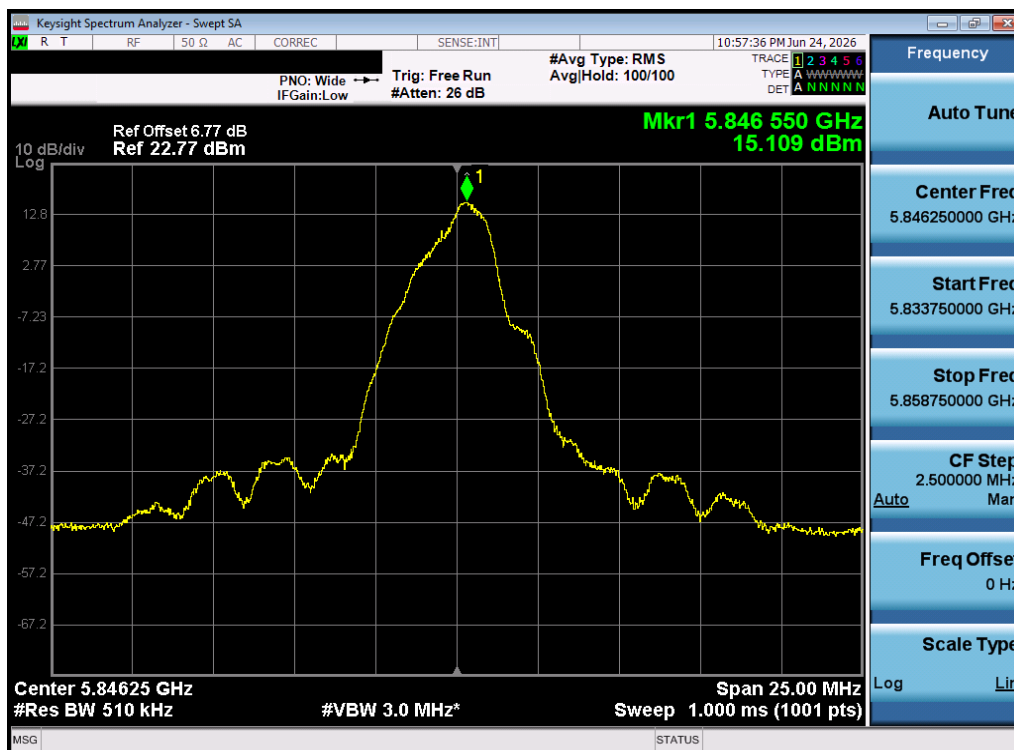

Plot 7-27. PSD (O-QPSK, 5846.25 MHz, 1000kbps)

FCC ID: BCG-A3587 IC: 579C-A3587	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/10/2026 - 7/24/2026	EUT Type: Watch	Approved by: Technical Manager
Test Report S/N: 1C2604100032-11.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 39 of 57

V 12.0 03/03/2026

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.6 Radiated Spurious Emission – Above 1GHz

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 and KDB 789033 D02 v02r01, and at the appropriate frequencies. All channels and power schemes were investigated among all UNII bands. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

For transmitters operating in the 5.725 – 5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (7.5) must not exceed the limits shown in Table 7-9 per Section 15.209 and RSS-Gen (7.4.3).

Frequency	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
Above 960.0 MHz	500	3

Table 7-12. Radiated Limits

Test Procedures Used

ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 – Subclauses 12.7.7.2, 12.7.6
KDB 789033 D02 v02r01 – Section G

FCC ID: BCG-A3587 IC: 579C-A3587	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/10/2026 - 7/24/2026	EUT Type: Watch	Approved by: Technical Manager
Test Report S/N: 1C2604100032-11.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 40 of 57

V 12.0 03/03/2026

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Test Settings

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1 MHz
3. VBW = 3 MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be $\geq 2 \times \text{span/RBW}$)
6. Averaging type = power (RMS)
7. Sweep time = auto couple
8. Trace was averaged over 100 sweeps

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1 MHz
3. VBW = 3 MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

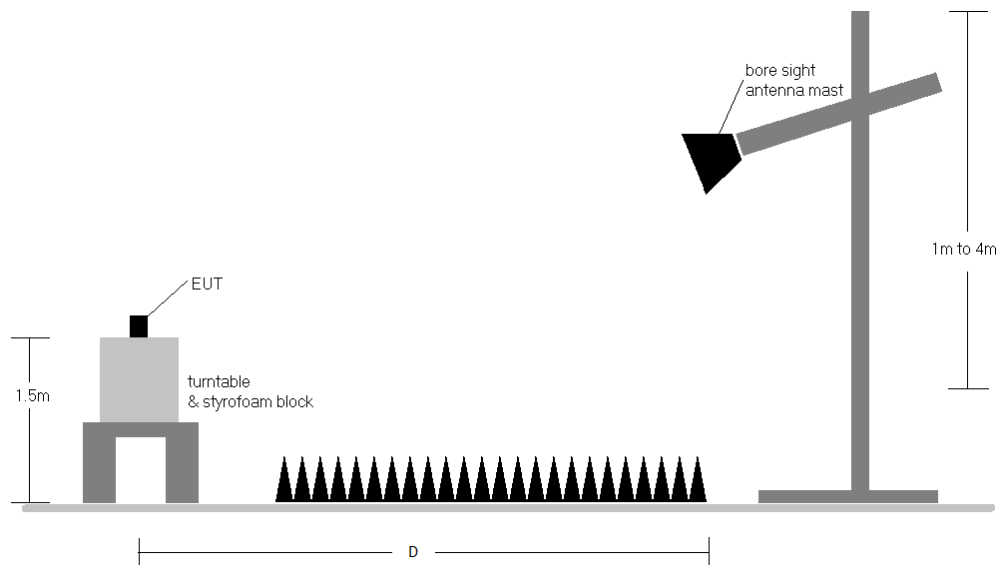


Figure 7-5. Test Instrument & Measurement Setup

FCC ID: BCG-A3587 IC: 579C-A3587	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/10/2026 - 7/24/2026	EUT Type: Watch	Approved by: Technical Manager
Test Report S/N: 1C2604100032-11.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 41 of 57

V 12.0 03/03/2026

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Test Notes

1. All emissions that lie in the restricted bands (denoted by a * next to the frequency) specified in §15.205 and Section 7.5 of RSS-Gen are below the limit shown in Table 7-12.
2. All spurious emissions lying in restricted bands specified in §15.205 and Section 7.5 of RSS-Gen are below the limit shown in Table 7-12. All spurious emissions that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dB μ V/m.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. This unit was tested with its standard battery.
5. The spectrum is measured from 9 kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1 GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas.
6. D is the measurement test distance and emissions 1-18 GHz were measured at a 3 meters test distance while emissions above 18 GHz were measured at a 1 meter test distance with the application of a distance correction factor.
7. The “-” shown in the following RSE tables are used to denote a noise floor measurement.
8. All supported rates have been tested on the unit and only worst case configuration is reported.

Sample Calculations

Determining Spurious Emissions Levels


- Field Strength Level [dB μ V/m] = Analyzer Level [dBm] + 107 + AFCL [dB/m]
- AFCL [dB/m] = Antenna Factor [dB/m] + Cable Loss [dB] – Preamplifier Gain [dB]
- Margin [dB] = Field Strength Level [dB μ V/m] – Limit [dB μ V/m]

Radiated Band Edge Measurement Offset

- The amplitude offset shown in the radiated restricted band edge plots in Section 7.6.2 was calculated using the formula:
Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain

FCC ID: BCG-A3587 IC: 579C-A3587	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/10/2026 - 7/24/2026	EUT Type: Watch	Approved by: Technical Manager
Test Report S/N: 1C2604100032-11.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 42 of 57

7.6.1 Radiated Spurious Emission

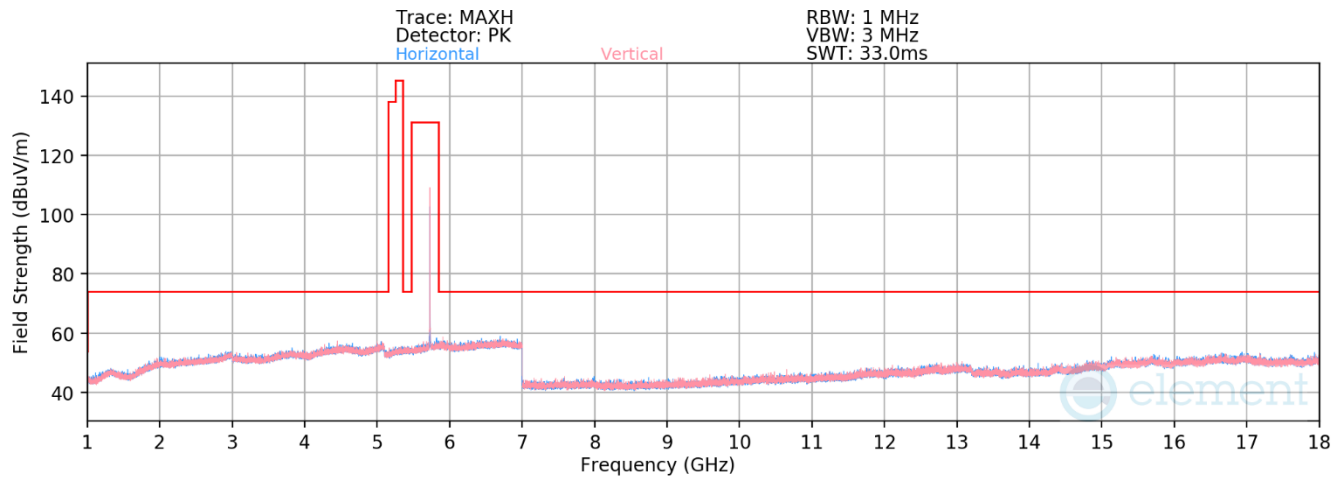

Plot 7-28. Radiated Spurious Emissions 1-18GHz (O-QPSK – 5728.75 MHz)


Mode:	O-QPSK
Data Rate:	250kbps
Distance of Measurements:	3 Meters
Operating Frequency:	5728.75 MHz
Channel:	1

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	11457.50	Average	H	-	-	-81.54	10.03	35.49	53.98	-18.49
*	11457.50	Peak	H	-	-	-70.14	10.03	46.89	73.98	-27.09
	17186.25	Peak	H	218	92	-71.78	19.05	54.27	68.20	-13.93


Table 7-13. Radiated Spurious Emissions Measurements

FCC ID: BCG-A3587 IC: 579C-A3587	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/10/2026 - 7/24/2026	EUT Type: Watch	Approved by: Technical Manager
Test Report S/N: 1C2604100032-11.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 43 of 57

V 12.0 03/03/2026

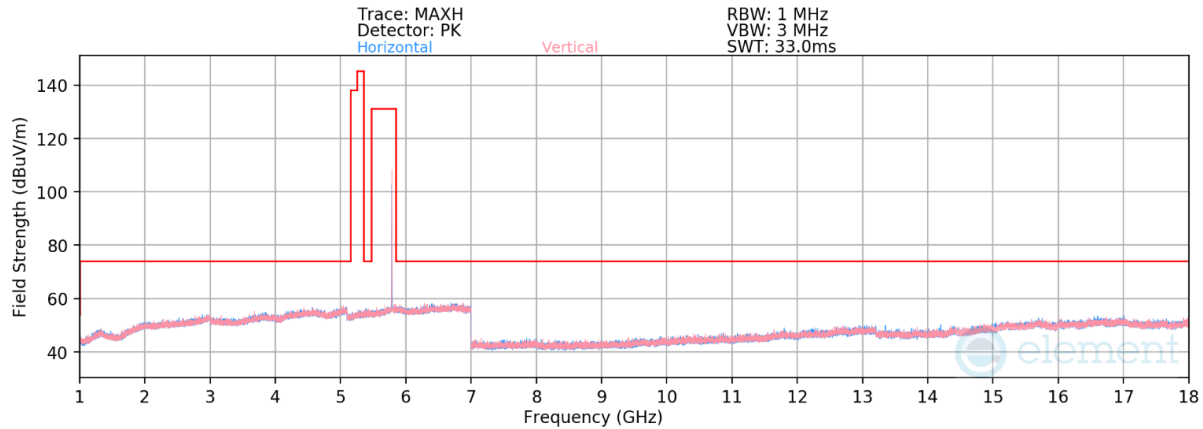

Plot 7-29. Radiated Spurious Emissions 1-18GHz (O-QPSK – 5786.25 MHz)

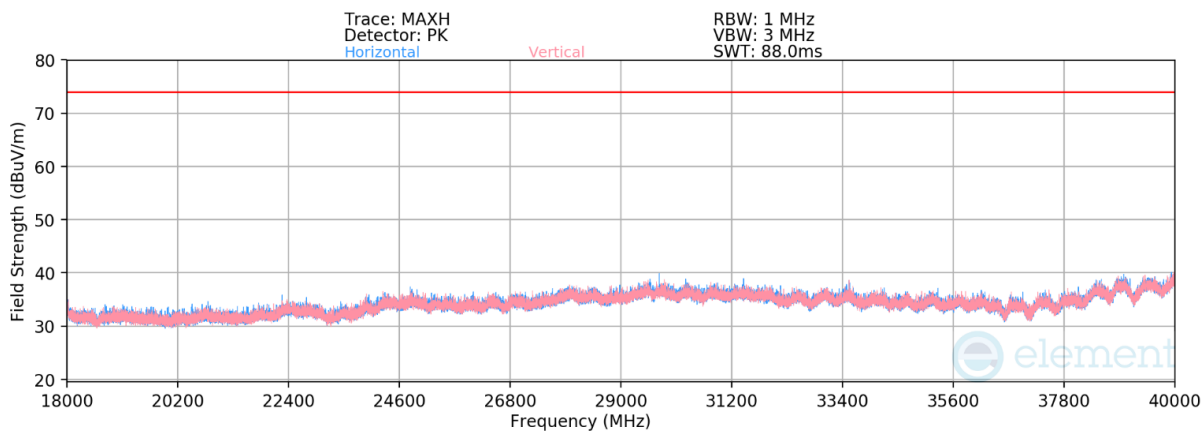

Plot 7-30. Radiated Spurious Emissions Above 18GHz (O-QPSK – 5786.25 MHz)

Mode: O-QPSK

Data Rate: 250kbps

Distance of Measurements: 3 Meters


Operating Frequency: 5786.25 MHz

Channel: 24

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 11572.50	Average	H	-	-	-81.33	10.08	0.00	35.75	53.98	-18.23
* 11572.50	Peak	H	-	-	-70.01	10.09	0.00	47.08	73.98	-26.90
17358.75	Peak	H	208	95	-72.50	18.92	0.00	53.42	68.20	-14.78
23145.00	Peak	H	-	-	-51.25	-5.65	-9.54	40.56	68.20	-27.64
28931.25	Peak	H	-	-	-53.80	-2.80	-9.54	40.86	68.20	-27.34
34717.50	Peak	H	-	-	-51.29	-4.60	-9.54	41.57	68.20	-26.63

Table 7-14. Radiated Spurious Emissions Measurements

FCC ID: BCG-A3587 IC: 579C-A3587	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/10/2026 - 7/24/2026	EUT Type: Watch	Approved by: Technical Manager
Test Report S/N: 1C2604100032-11.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 44 of 57

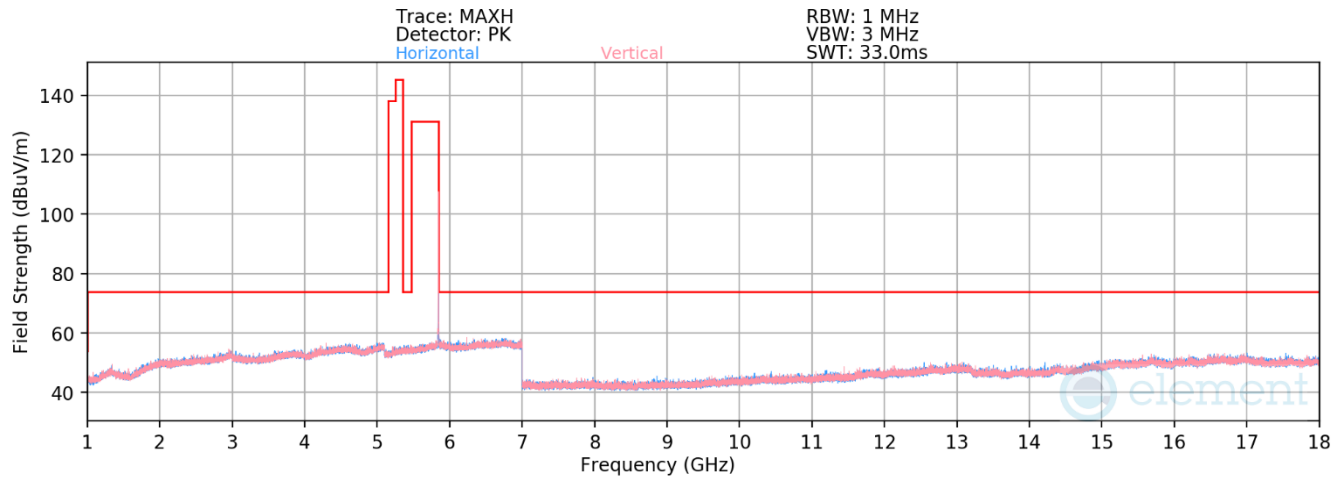

Plot 7-31. Radiated Spurious Emissions 1-18GHz (O-QPSK – 5846.25 MHz)

Mode: O-QPSK
Data Rate: 250kbps
Distance of Measurements: 3 Meters
Operating Frequency: 5846.25 MHz
Channel: 48


	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	11692.50	Average	H	-	-	-81.44	10.71	36.27	53.98	-17.71
*	11692.50	Peak	H	-	-	-70.02	10.71	47.69	73.98	-26.29
	17538.75	Peak	H	219	90	-72.46	18.20	52.74	68.20	-15.46

Table 7-15. Radiated Spurious Emissions Measurements


FCC ID: BCG-A3587 IC: 579C-A3587	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/10/2026 - 7/24/2026	EUT Type: Watch	Approved by: Technical Manager
Test Report S/N: 1C2604100032-11.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 45 of 57

V 12.0 03/03/2026

7.6.2 Radiated Band Edge Measurements

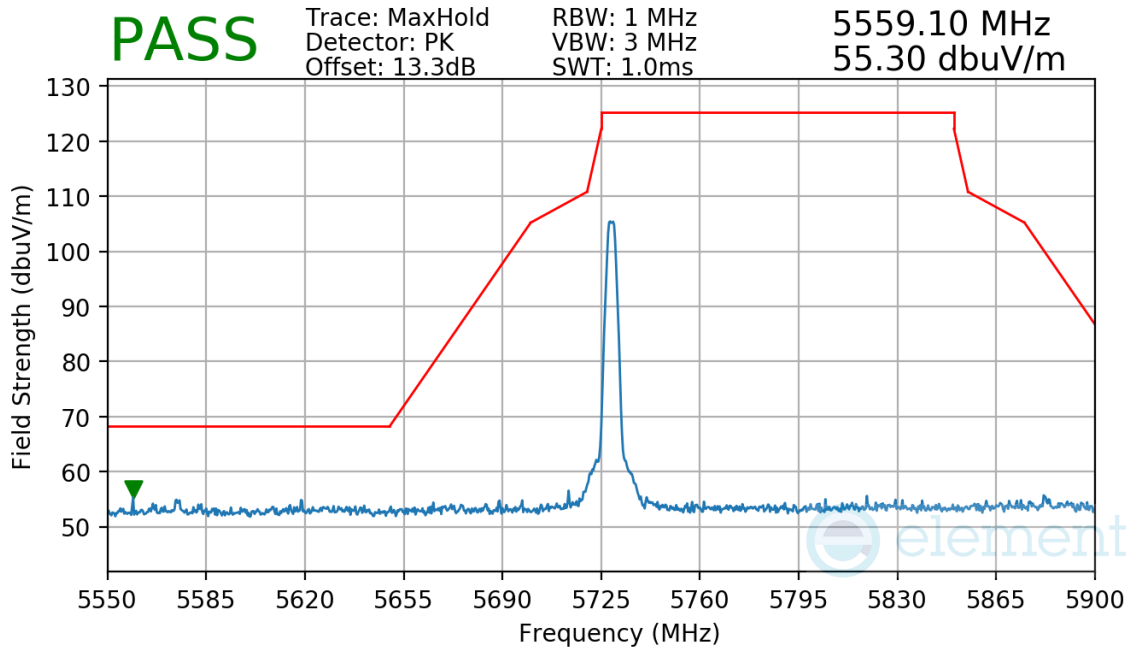


Plot 7-32. Radiated Lower Band Edge Measurement (Pk, Ch. 1, O-QPSK, 250Kbps)

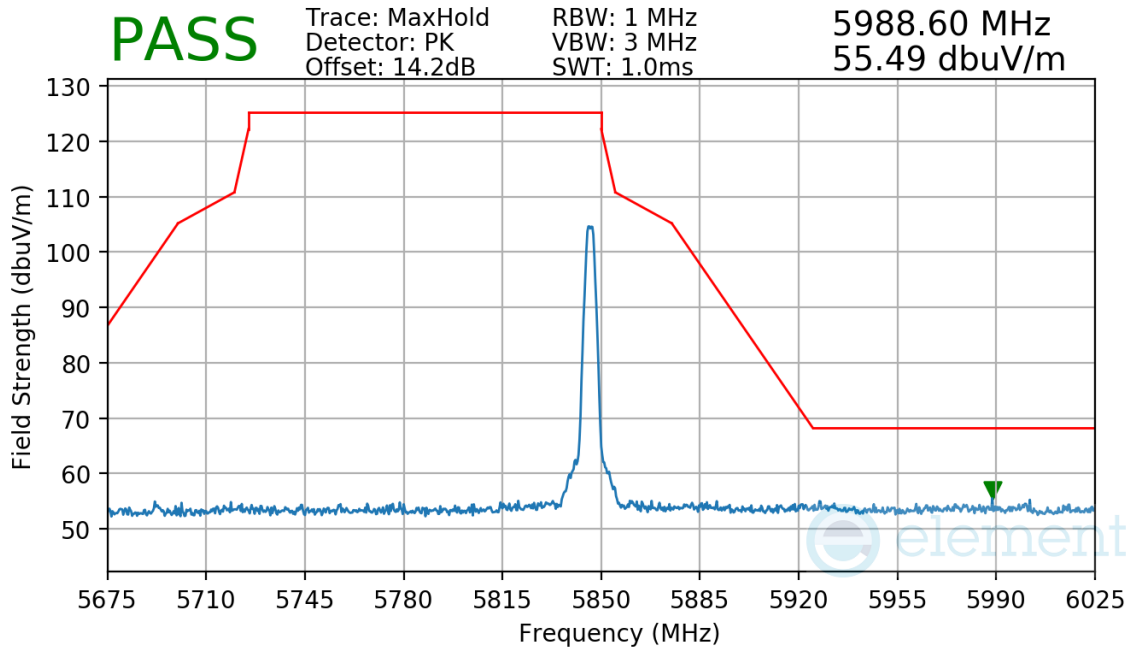


Plot 7-33. Radiated Upper Band Edge Measurement (Pk, Ch. 48, O-QPSK, 250Kbps)

FCC ID: BCG-A3587 IC: 579C-A3587	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/10/2026 - 7/24/2026	EUT Type: Watch	Approved by: Technical Manager
Test Report S/N: 1C2604100032-11.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 46 of 57

V 12.0 03/03/2026

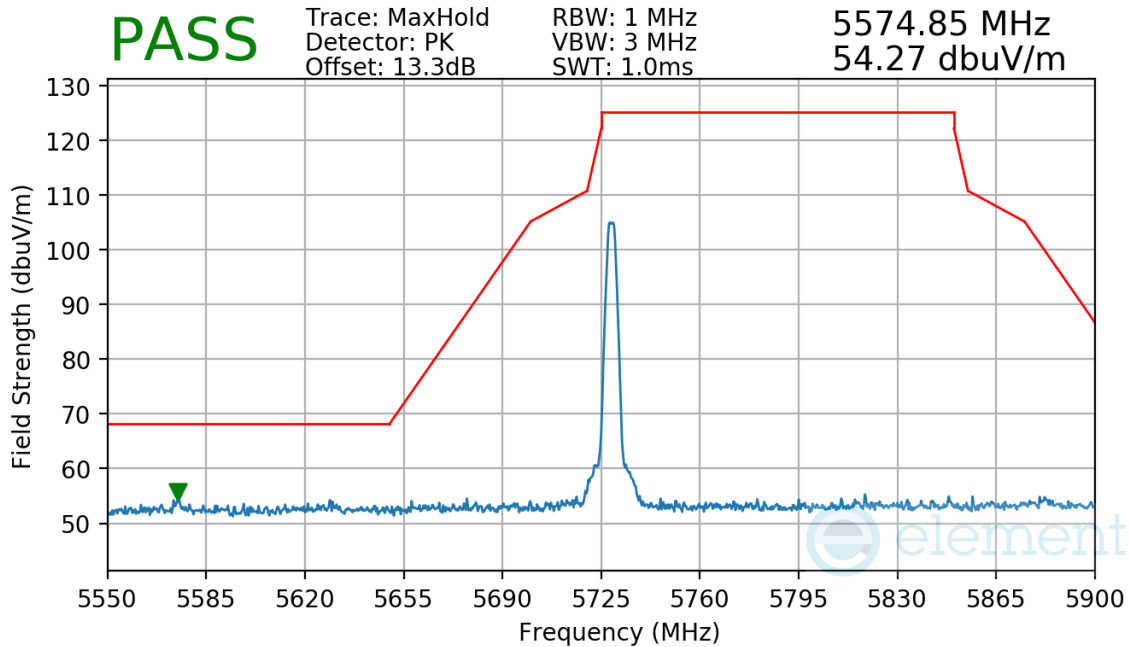


Plot 7-34. Radiated Lower Band Edge Measurement (Pk, Ch. 1, O-QPSK, 500Kbps)

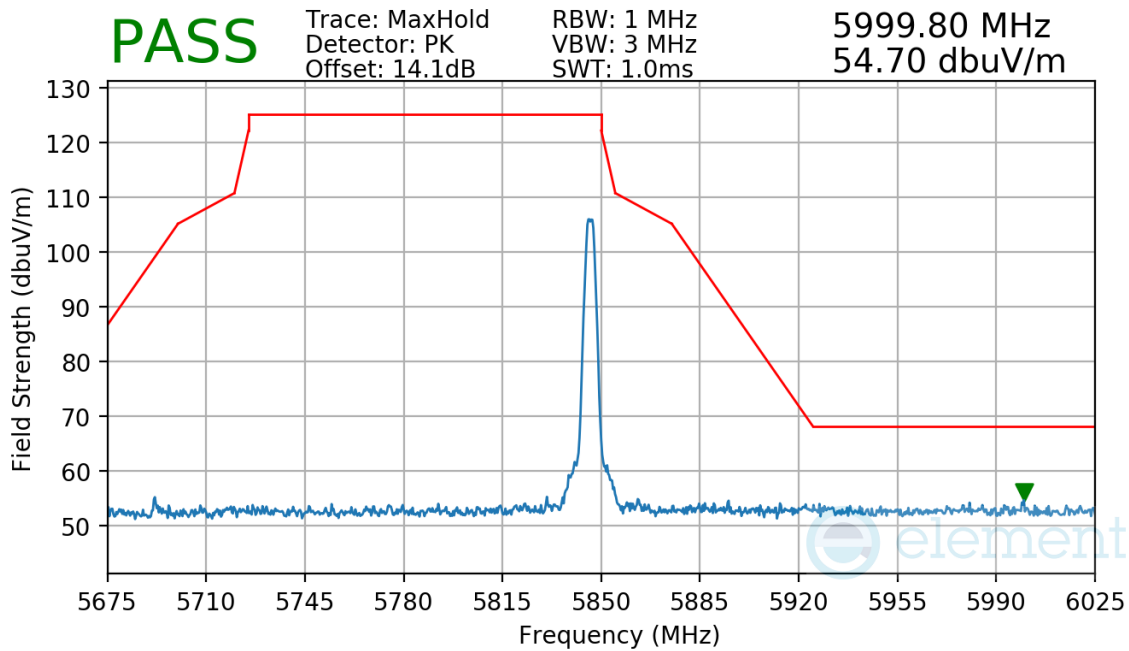


Plot 7-35. Radiated Upper Band Edge Measurement (Pk, Ch. 48, O-QPSK, 500Kbps)

FCC ID: BCG-A3587 IC: 579C-A3587	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/10/2026 - 7/24/2026	EUT Type: Watch	Approved by: Technical Manager
Test Report S/N: 1C2604100032-11.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 47 of 57

V 12.0 03/03/2026

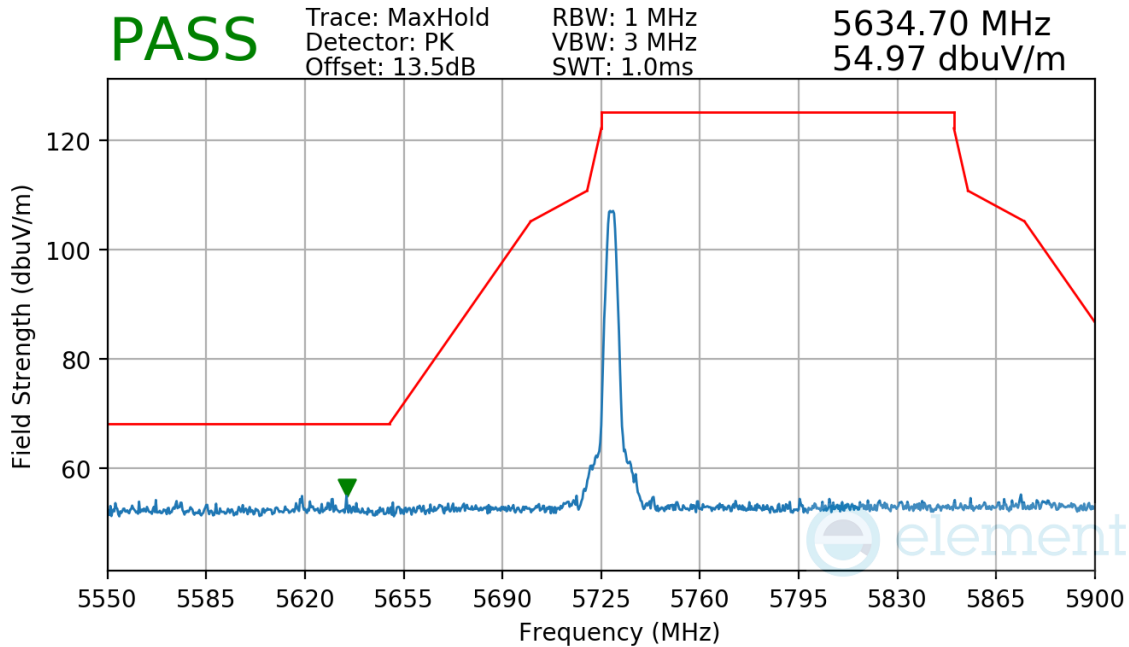

Plot 7-36. Radiated Lower Band Edge Measurement (Pk, Ch. 1, O-QPSK, 1000Kbps)

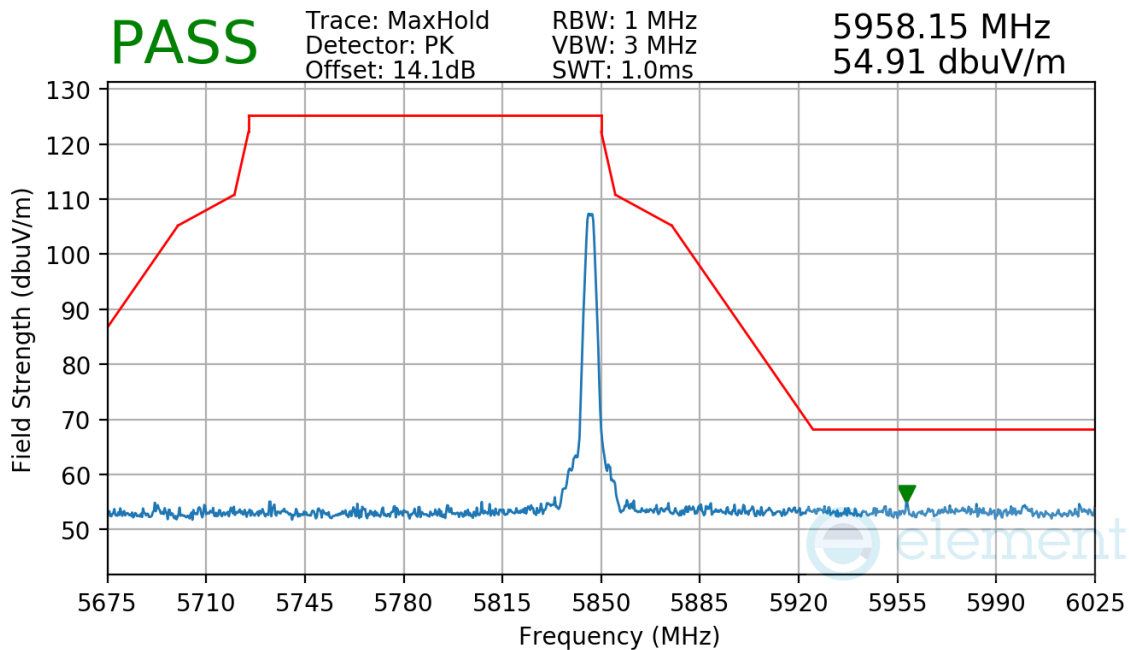

Plot 7-37. Radiated Upper Band Edge Measurement (Pk, Ch. 48, O-QPSK, 1000Kbps)

FCC ID: BCG-A3587 IC: 579C-A3587	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/10/2026 - 7/24/2026	EUT Type: Watch	Approved by: Technical Manager
Test Report S/N: 1C2604100032-11.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 48 of 57

7.7 Radiated Spurious Emissions – Below 1GHz

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (7.5) must not exceed the limits shown in Table 7-16 per Section 15.209 and RSS-Gen(7.4.3).

Frequency	Field Strength [μV/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-16. Radiated Limits

Test Procedures Used

ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120 kHz (for emissions from 30 MHz – 1 GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120 kHz (for emissions from 30 MHz – 1 GHz)
3. VBW = 300 kHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: BCG-A3587 IC: 579C-A3587	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/10/2026 - 7/24/2026	EUT Type: Watch	Approved by: Technical Manager
Test Report S/N: 1C2604100032-11.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 49 of 57

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

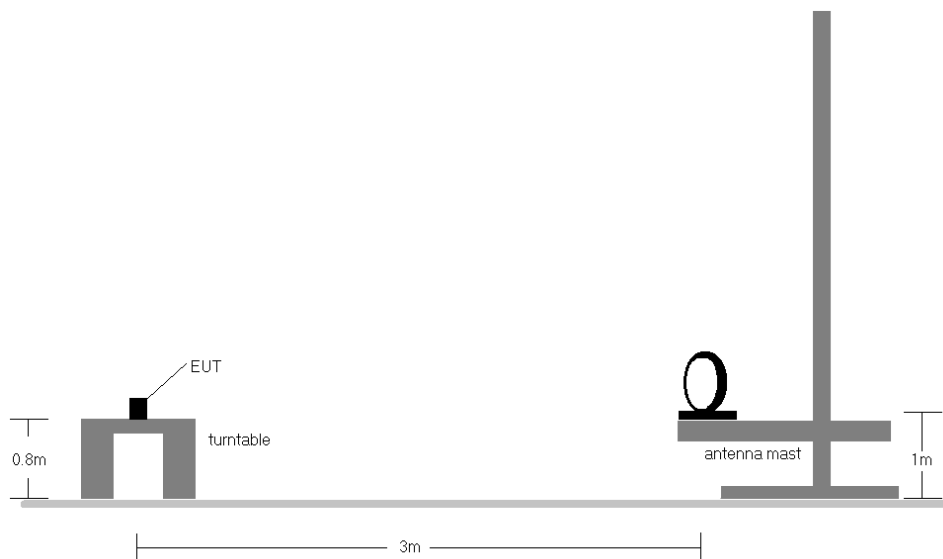


Figure 7-6. Radiated Test Setup < 30MHz

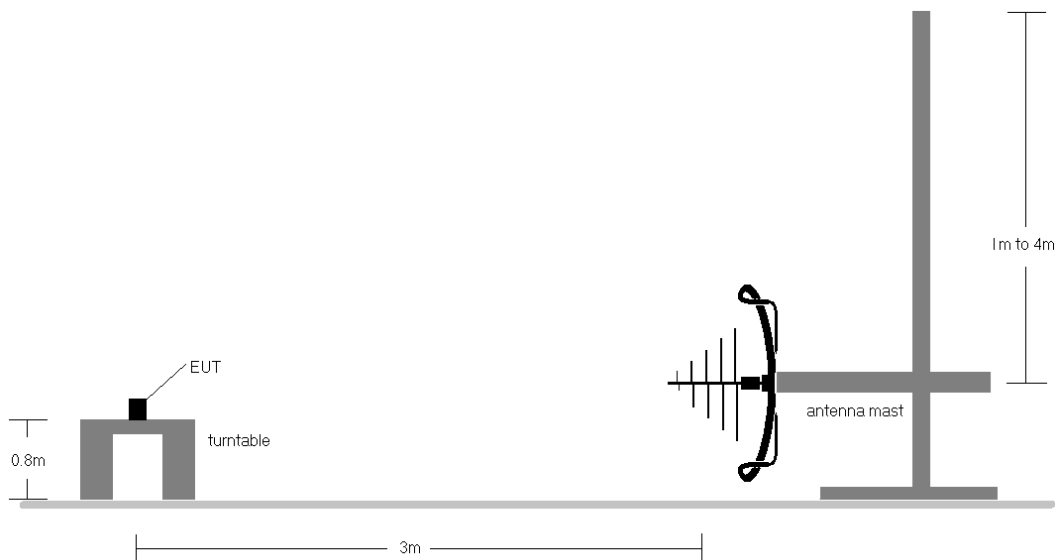


Figure 7-7. Radiated Test Setup < 1GHz

FCC ID: BCG-A3587 IC: 579C-A3587	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/10/2026 - 7/24/2026	EUT Type: Watch	Approved by: Technical Manager
Test Report S/N: 1C2604100032-11.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 50 of 57

V 12.0 03/03/2026

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen (7.5) are below the limit shown in Table 7-16.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes. For below 30 MHz the loop antenna was positioned in 3 orthogonal planes (X front, Y side, Z top) to determine the orientation resulting in the worst case emissions.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector for emissions within 6dB of the limit.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and rates that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30 MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. All supported rates have been tested on the unit and only worst case configuration is reported.
10. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC charger adaptor via USB-C cable with magnetic charger.
 - b. EUT powered by host PC via USB-C cable with magnetic charger.


Sample Calculations

Determining Spurious Emissions Levels

- Field Strength Level $_{[dB\mu V/m]} = \text{Analyzer Level }_{[dBm]} + 107 + \text{AFCL }_{[dB/m]}$
- $\text{AFCL }_{[dB/m]} = \text{Antenna Factor }_{[dB/m]} + \text{Cable Loss }_{[dB]} - \text{Preamplifier Gain }_{[dB]}$
- $\text{Margin }_{[dB]} = \text{Field Strength Level }_{[dB\mu V/m]} - \text{Limit }_{[dB\mu V/m]}$

FCC ID: BCG-A3587 IC: 579C-A3587	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/10/2026 - 7/24/2026	EUT Type: Watch	Approved by: Technical Manager
Test Report S/N: 1C2604100032-11.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 51 of 57

Radiated Spurious Emissions (Below 1GHz)

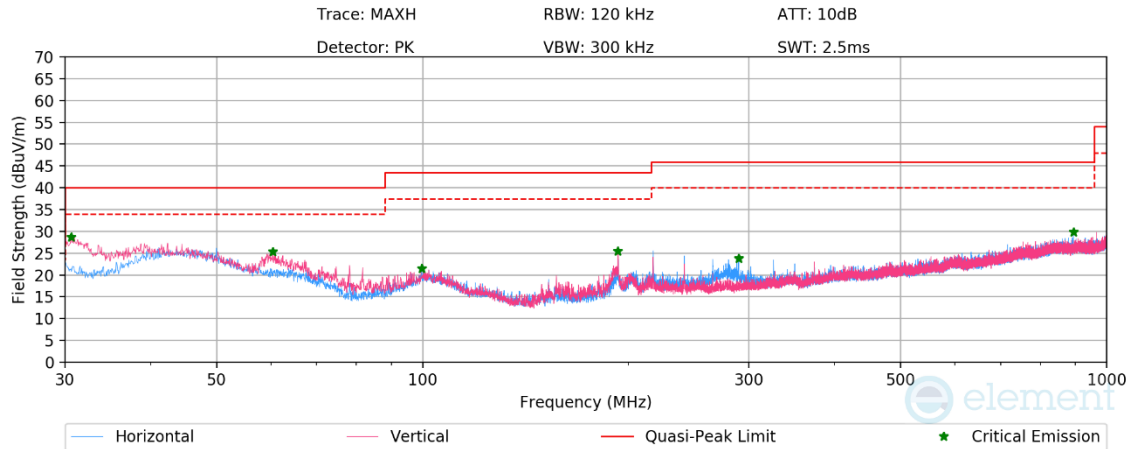

Plot 7-38. RSE 30 MHz – 1 GHz (O-QPSK, 250Kbps – Ch. 24), with AC/DC Adapter & magnetic charger

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
30.60	Max-Peak	V	278	-59.06	-19.29	28.65	40.00	-11.35
60.36	Max-Peak	V	124	-64.57	-17.04	25.39	40.00	-14.61
99.60	Max-Peak	H	99	-67.58	-17.86	21.55	43.50	-21.95
193.03	Max-Peak	V	284	-63.61	-17.96	25.43	43.50	-18.07
289.75	Max-Peak	H	147	-67.56	-15.57	23.87	46.00	-22.13
894.10	Max-Peak	H	211	-72.75	-4.45	29.80	46.00	-16.20

Table 7-17. RSE 30 MHz – 1 GHz (O-QPSK, 250Kbps – Ch. 24), with AC/DC Adapter & magnetic charger

FCC ID: BCG-A3587 IC: 579C-A3587	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/10/2026 - 7/24/2026	EUT Type: Watch	Approved by: Technical Manager
Test Report S/N: 1C2604100032-11.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 52 of 57

7.8 AC Line Conducted Emissions Measurement

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for AC Line conducted spurious emissions. All data rates and modes were investigated for AC Line conducted spurious emissions.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (7.4.2).

Frequency of emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-18. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024, Subclause 6.2

Test Settings

Quasi-Peak Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9 kHz (for emissions from 150 kHz – 30 MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9 kHz (for emissions from 150 kHz – 30 MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: BCG-A3587 IC: 579C-A3587	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/10/2026 - 7/24/2026	EUT Type: Watch	Approved by: Technical Manager
Test Report S/N: 1C2604100032-11.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 53 of 57

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

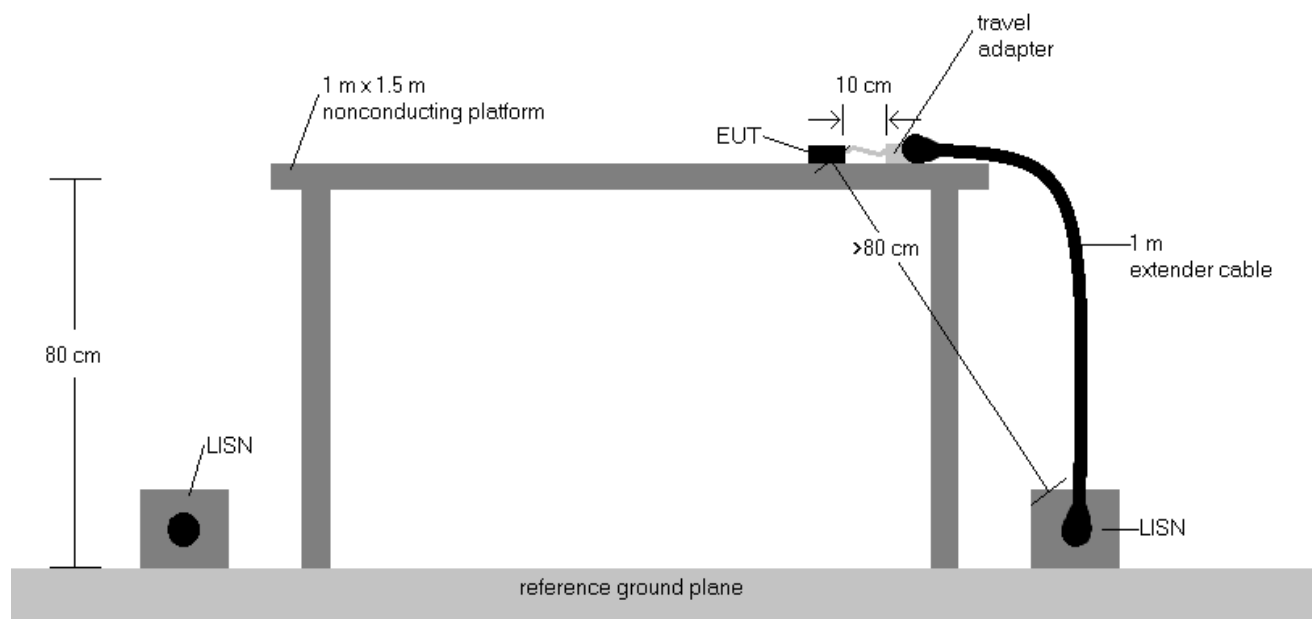


Figure 7-8. Test Instrument & Measurement Setup


Test Notes

- All modes of operation were investigated and the worst-case emissions are reported. The emissions found were not affected by the choice of channel used during testing.
- Both configurations below were investigated, and the worst case has been reported.
 - EUT powered by AC/DC adaptor via USB-C cable with magnetic charger.
 - EUT powered by host PC via USB-C cable with magnetic charger.
- The limit for an intentional radiator from 150 kHz to 30 MHz are specified in 15.207 and RSS-Gen (7.4.2).
- $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
- $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Correction Factor (dB)}$
- $\text{Margin (dB)} = \text{QP/AV Level (dB}\mu\text{V)} - \text{QP/AV Limit (dB}\mu\text{V)}$
- Traces shown in plots are made using quasi-peak and average detectors.
- Deviations to the Specifications: None.

FCC ID: BCG-A3587 IC: 579C-A3587	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/10/2026 - 7/24/2026	EUT Type: Watch	Approved by: Technical Manager
Test Report S/N: 1C2604100032-11.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 54 of 57

V 12.0 03/03/2026

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

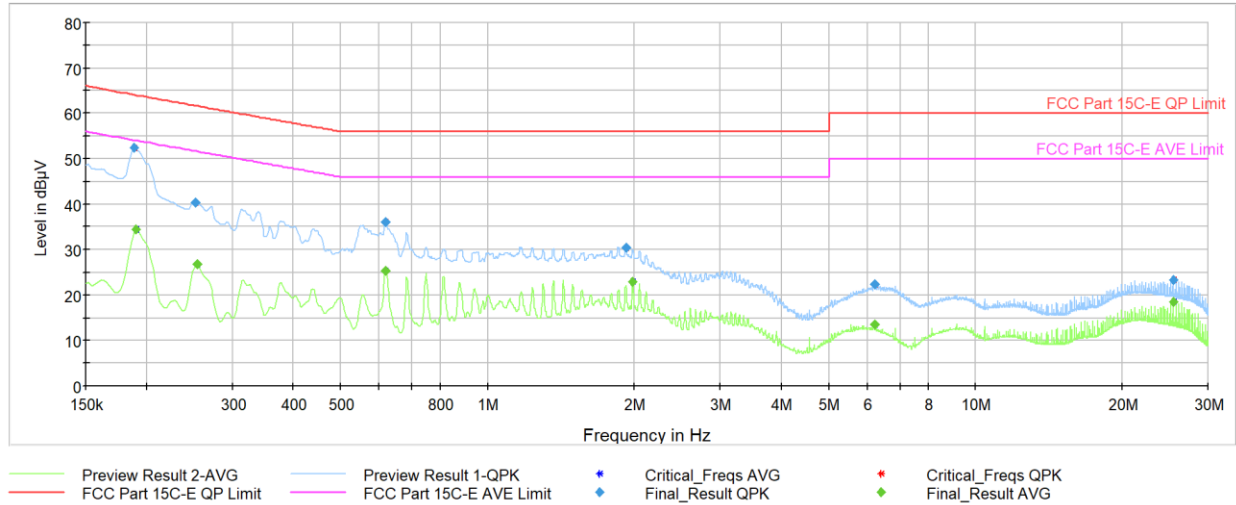


Plot 7-39. AC Line Conducted Plot (O-QPSK, 250Kbps – Ch. 24) (L1) with host PC via USB-C cable with magnetic charger

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.188	FINAL	52.4	—	64.11	-11.74	L1	GND
0.191	FINAL	—	34.36	54.02	-19.66	L1	GND
0.251	FINAL	40.4	—	61.72	-21.32	L1	GND
0.254	FINAL	—	26.75	51.64	-24.89	L1	GND
0.618	FINAL	—	25.37	46.00	-20.63	L1	GND
0.618	FINAL	36.1	—	56.00	-19.90	L1	GND
1.923	FINAL	30.5	—	56.00	-25.49	L1	GND
1.984	FINAL	—	22.97	46.00	-23.03	L1	GND
6.203	FINAL	22.3	—	60.00	-37.72	L1	GND
6.205	FINAL	—	13.47	50.00	-36.53	L1	GND
25.447	FINAL	—	18.49	50.00	-31.51	L1	GND
25.447	FINAL	23.4	—	60.00	-36.60	L1	GND

Table 7-19. AC Line Conducted (O-QPSK, 250Kbps – Ch. 24) (L1) with host PC via USB-C cable with magnetic charger

FCC ID: BCG-A3587 IC: 579C-A3587	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/10/2026 - 7/24/2026	EUT Type: Watch	Approved by: Technical Manager
Test Report S/N: 1C2604100032-11.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 55 of 57

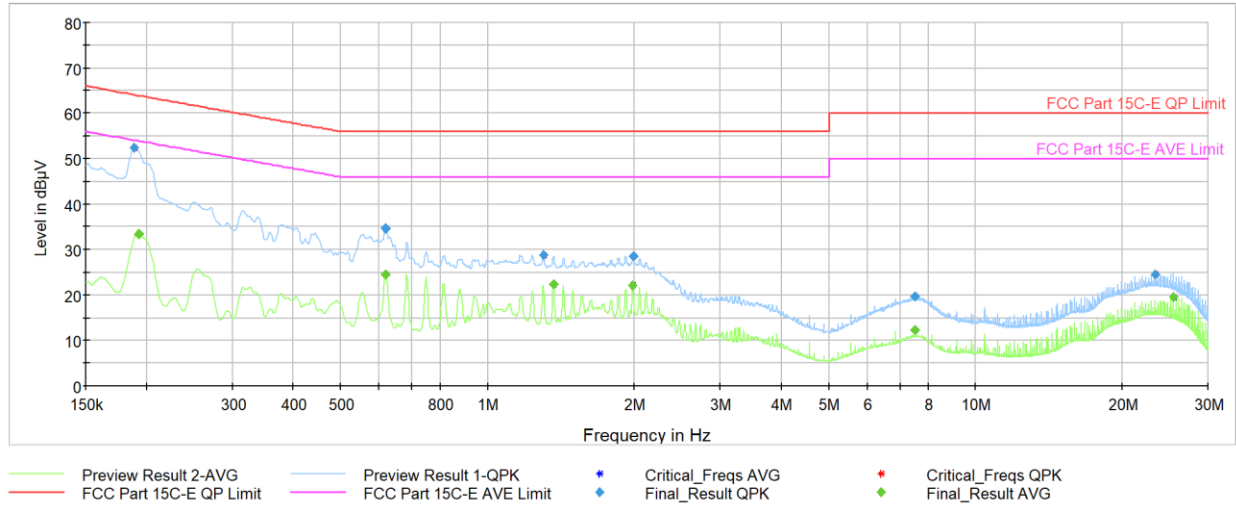

Plot 7-40. AC Line Conducted Plot (O-QPSK, 250Kbps – Ch. 24) (N) with host PC via USB-C cable with magnetic charger

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.188	FINAL	52.3	—	64.11	-11.78	N	GND
0.193	FINAL	—	33.46	53.92	-20.45	N	GND
0.618	FINAL	—	24.57	46.00	-21.43	N	GND
0.618	FINAL	34.7	—	56.00	-21.27	N	GND
1.302	FINAL	28.7	—	56.00	-27.27	N	GND
1.367	FINAL	—	22.40	46.00	-23.60	N	GND
1.984	FINAL	—	22.07	46.00	-23.93	N	GND
1.986	FINAL	28.5	—	56.00	-27.47	N	GND
7.510	FINAL	19.8	—	60.00	-40.17	N	GND
7.510	FINAL	—	12.35	50.00	-37.65	N	GND
23.336	FINAL	24.5	—	60.00	-35.51	N	GND
25.447	FINAL	—	19.58	50.00	-30.42	N	GND

Table 7-20. AC Line Conducted (O-QPSK, 250Kbps – Ch. 24) (N) with host PC via USB-C cable with magnetic charger

FCC ID: BCG-A3587 IC: 579C-A3587	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/10/2026 - 7/24/2026	EUT Type: Watch	Approved by: Technical Manager
Test Report S/N: 1C2604100032-11.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 56 of 57

V 12.0 03/03/2026

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Apple Watch FCC ID: BCG-A3587, IC: 579C-A3587** is in compliance with Part 15 Subpart E (15.407) of the FCC Rules and RSS-247 of the Innovation, Science, and Economic Development Canada Rules.

FCC ID: BCG-A3587 IC: 579C-A3587	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 6/10/2026 - 7/24/2026	EUT Type: Watch	Approved by: Technical Manager
Test Report S/N: 1C2604100032-11.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 57 of 57

V 12.0 03/03/2026

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.