FCC 47 CFR PART 15 SUBPART E

CERTIFICATION TEST REPORT

FOR

CELLULAR PHONE WITH BLUETOOTH AND WLAN RADIOS

MODEL NUMBER: A1524

FCC ID: BCG-E2817A

REPORT NUMBER: 14U17676-E9, Revision C

ISSUE DATE: AUGUST 05, 2014

Prepared for
APPLE, INC.
1 INFINITE LOOP
CUPERTINO, CA 95014, U.S.A.

Prepared by
UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888

NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
--	7/28/2014	Initial Issue	D. Garcia
A	7/30/14	Product description updated, updated sections 1, 5.6, 9.1.3, 9.2.3, 9.3.3, 9.4.3, 9.5.3, 9.6.3, 9.7.3, 9.8.3, 9.9.3, 9.10.3, 9.11.3, 9.12.3, 9.13.3, 9.14.3, 9.15.3, 9.15.4, 9.16.4, 9.17.4, 9.18.4, 9.19.4, 10.2.17, 12	D. Garcia
B	08/02/14	Address TCB Questions	T. Lee
C	08/05/14	Update sections 5.2 and 5.5	D. Garcia

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS 8

2. TEST METHODOLOGY 9

3. FACILITIES AND ACCREDITATION 9

4. CALIBRATION AND UNCERTAINTY 9

4.1. MEASURING INSTRUMENT CALIBRATION 9

4.2. SAMPLE CALCULATION 9

4.3. MEASUREMENT UNCERTAINTY 10

5. EQUIPMENT UNDER TEST 11

5.1. DESCRIPTION OF EUT 11

5.2. MAXIMUM OUTPUT POWER 11

5.3. DESCRIPTION OF AVAILABLE ANTENNAS 12

5.4. SOFTWARE AND FIRMWARE 12

5.5. WORST-CASE CONFIGURATION AND MODE 12

5.6. DESCRIPTION OF TEST SETUP 13

6. TEST AND MEASUREMENT EQUIPMENT 17

7. MEASUREMENT METHODS 18

8. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS 19

8.1. ON TIME AND DUTY CYCLE RESULTS 19

8.2. DUTY CYCLE PLOTS 20

9. ANTENNA PORT TEST RESULTS 22

9.1. 802.11a MODE IN THE 5.2 GHz BAND 22

9.1.1. 26 dB BANDWIDTH 22
9.1.2. 99% BANDWIDTH 25
9.1.3. OUTPUT POWER 28
9.1.4. PSD 29

9.2. 802.11n HT20 MODE IN THE 5.2 GHz BAND 33

9.2.1. 26 dB BANDWIDTH 33
9.2.2. 99% BANDWIDTH 36
9.2.3. OUTPUT POWER 39
9.2.4. PSD 40

9.3. 802.11n HT40 MODE IN THE 5.2 GHz BAND 44

9.3.1. 26 dB BANDWIDTH 44
9.3.2. 99% BANDWIDTH 46
9.3.3. OUTPUT POWER 48
9.3.4. PSD 49

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.4. 802.11ac 80MHz 1TX SISO MODE IN THE 5.2 GHz BAND 52
9.4.1. 26 dB BANDWIDTH 52
9.4.2. 99% BANDWIDTH 54
9.4.3. OUTPUT POWER 55
9.4.4. PSD 56

9.5. 802.11a MODE IN THE 5.3 GHz BAND 59
9.5.1. 26 dB BANDWIDTH 59
9.5.2. 99% BANDWIDTH 62
9.5.3. OUTPUT POWER 65
9.5.4. PSD 66

9.6. 802.11n HT20 MODE IN THE 5.3 GHz BAND 70
9.6.1. 26 dB BANDWIDTH 70
9.6.2. 99% BANDWIDTH 73
9.6.3. OUTPUT POWER 76
9.6.4. PSD 77

9.7. 802.11n HT40 MODE IN THE 5.3 GHz BAND 81
9.7.1. 26 dB BANDWIDTH 81
9.7.2. 99% BANDWIDTH 83
9.7.3. OUTPUT POWER 85
9.7.4. PSD 86

9.8. 802.11ac 80MHz MODE IN THE 5.3 GHz BAND 89
9.8.1. 26 dB BANDWIDTH 89
9.8.2. 99% BANDWIDTH 90
9.8.3. OUTPUT POWER 91
9.8.4. PSD 92

9.9. 802.11a MODE IN THE 5.6 GHz BAND 95
9.9.1. 26 dB BANDWIDTH 95
9.9.2. 99% BANDWIDTH 98
9.9.3. OUTPUT POWER 101
9.9.4. PSD 102

9.10. 802.11n HT20 MODE IN THE 5.6 GHz BAND 106
9.10.1. 26 dB BANDWIDTH 106
9.10.2. 99% BANDWIDTH 109
9.10.3. OUTPUT POWER 112
9.10.4. PSD 113

9.11. 802.11n HT20, MODE, CHANNEL 144, IN THE 5.6 GHz BAND 117
9.11.1. 26 dB BANDWIDTH 117
9.11.2. 99% BANDWIDTH 118
9.11.3. AVERAGE POWER 119
9.11.4. OUTPUT POWER AND PSD 120

9.12. 802.11n HT40 MODE IN THE 5.6 GHz BAND 125
9.12.1. 26 dB BANDWIDTH 125
9.12.2. 99% BANDWIDTH 127
9.12.1. OUTPUT POWER 129
9.12.2. PSD 130

9.13. 802.11n HT40 MODE, CHANNEL 142, IN THE 5.6 GHz BAND 134
9.13.1. 26 dB BANDWIDTH 134
9.13.2. 99% BANDWIDTH 135

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.13.3. AVERAGE POWER 136
9.13.4. OUTPUT POWER AND PSD 137

9.14. 802.11ac 80MHz MODE IN THE 5.6 GHz BAND 142
9.14.1. 26 dB BANDWIDTH 142
9.14.2. 99% BANDWIDTH 143
9.14.3. OUTPUT POWER 144
9.14.4. PSD 145

9.15. 802.11ac 80MHz MODE, CHANNEL 138, 5.6 GHz BAND 148
9.15.1. 26 dB BANDWIDTH 148
9.15.2. 99% BANDWIDTH 149
9.15.3. AVERAGE POWER 150
9.15.4. OUTPUT POWER AND PSD 151

9.16. 802.11a MODE IN THE 5.8 GHz BAND 156
9.16.1. 6 dB BANDWIDTH 156
9.16.2. 26 dB BANDWIDTH 159
9.16.3. 99% BANDWIDTH 162
9.16.4. OUTPUT POWER 165
9.16.5. PSD 166

9.17. 802.11n HT20 MODE IN THE 5.8 GHz BAND 169
9.17.1. 6 dB BANDWIDTH 169
9.17.2. 26 dB BANDWIDTH 172
9.17.3. 99% BANDWIDTH 175
9.17.4. OUTPUT POWER 178
9.17.5. PSD 179

9.18. 802.11n HT40 MODE IN THE 5.8 GHz BAND 182
9.18.1. 6 dB BANDWIDTH 182
9.18.2. 26 dB BANDWIDTH 184
9.18.3. 99% BANDWIDTH 186
9.18.4. OUTPUT POWER 188
9.18.5. PSD 189

9.19. 802.11ac 80 MODE IN THE 5.8 GHz BAND 191
9.19.1. 6 dB BANDWIDTH 191
9.19.2. 26 dB BANDWIDTH 192
9.19.3. 99% BANDWIDTH 193
9.19.4. OUTPUT POWER 194
9.19.5. PSD 195

10. RADIATED TEST RESULTS 196

10.1. LIMITS AND PROCEDURE 196

10.2. TRANSMITTER ABOVE 1 GHz 197
10.2.1. TX ABOVE 1 GHz 802.11a MODE IN THE 5.2 GHz BAND 197
10.2.2. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.2 GHz BAND 205
10.2.3. TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 5.2 GHz BAND 213
10.2.4. TX ABOVE 1G 802.11ac 80MHz MODE IN THE 5.2 GHz BAND 219
10.2.5. TX ABOVE 1 GHz 802.11a MODE IN THE 5.3 GHz BAND 223
10.2.6. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.3 GHz BAND 231
10.2.7. TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 5.3 GHz BAND 239
10.2.8. TX ABOVE 1G 802.11ac 80MHz MODE IN THE 5.3 GHz BAND 245

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

10.2.9. TX ABOVE 1 GHz 802.11a MODE IN THE 5.6 GHz BAND 249
10.2.10. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.6 GHz BAND 258
10.2.11. TX ABOVE 1 GHz 802.11n HT20 MODE, CHANNEL 144, 5.6 GHz BAND 267
10.2.12. TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 5.6 GHz BAND 269
10.2.13. TX ABOVE 1G 802.11ac 80MHz MODE IN THE 5.6 GHz BAND 280
10.2.14. TX ABOVE 1 GHz 802.11a MODE IN THE 5.8 GHz BAND 286
10.2.15. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.8 GHz BAND 294
10.2.16. TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 5.8 GHz BAND 302
10.2.17. TX ABOVE 1G 802.11ac 80MHz MODE IN THE 5.8 GHz BAND 308

10.3. WORST-CASE BELOW 1 GHz 312

10.4. WORST-CASE 18 to 26 GHz 315

10.5. WORST-CASE 26 to 40 GHz 319

11. AC POWER LINE CONDUCTED EMISSIONS 323

12. DYNAMIC FREQUENCY SELECTION 328

12.1. OVERVIEW 328
12.1.1. LIMITS 328
12.1.2. TEST AND MEASUREMENT SYSTEM 332
12.1.3. SETUP OF EUT (CLIENT MODE) 335
12.1.4. SETUP OF EUT (CLIENT-TO-CLIENT COMMUNICATIONS MODE) 336
12.1.5. DESCRIPTION OF EUT 337

12.2. CLIENT MODE RESULTS FOR 20 MHz BANDWIDTH 339
12.2.1. TEST CHANNEL 339
12.2.2. RADAR WAVEFORM AND TRAFFIC 339
12.2.3. OVERLAPPING CHANNEL TESTS 341
12.2.4. MOVE AND CLOSING TIME 341

12.3. CLIENT MODE RESULTS FOR 40 MHz BANDWIDTH 346
12.3.1. TEST CHANNEL 346
12.3.2. RADAR WAVEFORM AND TRAFFIC 346
12.3.3. OVERLAPPING CHANNEL TESTS 348
12.3.4. MOVE AND CLOSING TIME 348
12.3.5. NON-OCCUPANCY PERIOD 353

12.4. CLIENT MODE RESULTS FOR 80 MHz BANDWIDTH 354
12.4.1. TEST CHANNEL 354
12.4.2. RADAR WAVEFORM AND TRAFFIC 354
12.4.3. OVERLAPPING CHANNEL TESTS 356
12.4.4. MOVE AND CLOSING TIME 356

12.5. CLIENT-TO-CLIENT COMMUNICATIONS MODE RESULTS FOR 20 MHz BANDWIDTH 361
12.5.1. TEST CHANNEL 361
12.5.2. RADAR WAVEFORM AND TRAFFIC 361
12.5.3. OVERLAPPING CHANNEL TESTS 363
12.5.4. MOVE AND CLOSING TIME 363

12.6. CLIENT-TO-CLIENT COMMUNICATIONS MODE RESULTS FOR 40 MHz BANDWIDTH 368
12.6.1. TEST CHANNEL 368
12.6.2. RADAR WAVEFORM AND TRAFFIC 368

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

12.6.3. OVERLAPPING CHANNEL TESTS 370
12.6.4. MOVE AND CLOSING TIME.....370

13. SETUP PHOTOS 375

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: APPLE, INC.
1 INFINITE LOOP
CUPERTINO, CA 95014, U.S.A.

EUT DESCRIPTION: CELLULAR PHONE WITH BLUETOOTH AND WLAN RADIOS

MODEL: A1524

SERIAL NUMBER: C39MV097G1G3 (Conducted) C39MV004G2YF (Radiated)

DATE TESTED: JUNE 3, 2014 TO JULY 24, 2014

APPLICABLE STANDARDS	
STANDARD	**TEST RESULTS**
CFR 47 Part 15 Subpart E	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:

FRANCISCO DE ANDA
PROJECT LEAD
UL VERIFICATION SERVICES INC.

Tested By:

Chris Xiong
EMC TECHNICIAN
UL VERIFICATION SERVICES INC.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, FCC 06-96, FCC KDB 789033, ANSI C63.10-2009.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
☐ Chamber A	☒ Chamber E
☐ Chamber B	☒ Chamber F
☐ Chamber C	☐ Chamber G
☒ Chamber D	☒ Chamber H

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at http://ts.nist.gov/standards/scopes/2000650.htm.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

Field Strength (dBuV/m) = Measured Voltage (dBuV) + Antenna Factor (dB/m) + Cable Loss (dB) – Preamp Gain (dB)

36.5 dBuV + 18.7 dB/m + 0.6 dB – 26.9 dB = 28.9 dBuV/m

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	±3.52 dB
Radiated Disturbance, 30 to 1000 MHz	±4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

Model A1524 is a mobile phone with multimedia functions (music, application support, and video), Cellular GSM/GPRS/EGPRS/CDMA2000/EVDO Rev.A/ EVDO Rev.B /WCDMA/HSPA+/DC-HSDPA/LTE FDD & Carrier Aggregation radio, IEEE 802.11a/b/g/n/ac radio, Bluetooth radio and NFC. The rechargeable battery is not user accessible.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5180 - 5240	802.11a	16.90	48.98
5180 - 5240	802.11n HT20	16.86	48.53
5190 - 5230	802.11n HT40	16.82	48.08
5210	802.11ac VHT80	12.78	18.97
5260 - 5320	802.11a	16.50	44.67
5260 - 5320	802.11n HT20	16.50	44.67
5270 - 5310	802.11n HT40	16.45	44.16
5290	802.11ac VHT80	12.86	19.32
5500 - 5700	802.11a	16.94	49.43
5500 - 5700	802.11n HT20	16.96	49.66
5720	802.11n HT20	15.98	39.63
5510 - 5670	802.11n HT40	16.98	49.89
5710	802.11n HT40	14.95	31.26
5530	802.11ac VHT80	12.98	19.86
5690	802.11ac VHT80	12.92	19.59
5745 - 5825	802.11a	16.83	48.19
5745 - 5825	802.11n HT20	16.93	49.32
5755 - 5795	802.11n HT40	16.93	49.32
5775	802.11ac VHT80	12.89	19.45

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a PiFA antenna, with a maximum gain as below table:

FREQUENCY (MHZ)	ANTENNA GAIN (dBi)
5150 -- 5250	-2.56
5250 -- 5350	-1.46
5500 -- 5700	-0.44
5725 -- 5850	-0.87

5.4. SOFTWARE AND FIRMWARE

The firmware installed in the EUT during testing was 7.16.121

The test utility software used during testing was wl 7.16 RC121.0.

5.5. WORST-CASE CONFIGURATION AND MODE

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X (Flatbed), Y (Landscape), Z (Portrait), it was determined that X orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in X (Flatbed) orientation.

Worst-case data rates as provided by the client were:
Based on the baseline scan, the worst-case data rates were:

802.11a mode: 6 Mbps
802.11n HT20mode: MCS0
802.11n HT40mode: MCS0
802.11ac VHT80mode: MCS0

Radiated emissions for EUT with antenna was performed and passed; therefore, antenna port spurious was not performed.

There are three vendors of the WiFi/Bluetooth radio modules: variant 1, variant 2 and variant 3 and they have the same mechanical outline, same on board antenna, matching circuit, antenna structure and same specification. Baseline testing was performed on all three variants to determine the worst case on all conducted power and radiated emissions.
.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

5.6. DESCRIPTION OF TEST SETUP

CONDUCTED TESTS SUPPORT EQUIPMENT

Description	Manufacturer	Model	Serial Number	FCC ID
Laptop	Lenovo	T61	00044-315-135-244	MCLJ07H081
AC Adapter	Lenovo	N/A	92P1213	N/A
DC Power Supply	Sorensen	XT 15-4	1319A02780	N/A

RADIATED TESTS SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST			
Description	Manufacturer	Model	Serial Number
Earphone	Apple	N/A	N/A
AC Adpater	Apple	A1344	N/A

I/O CABLES (RF Conducted Test)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	Antenna	1	SMA	Un-Shielded	0.1	to spectrum Analyzer
2	USB	1	USB	Shielded	1m	To EUT
3	DC	1	n/a	Un-Shielded	0.5	Power supply to EUT

I/O CABLES (RF Radiated Test)

I/O CABLE LIST						
Cable No.	Port	# of Identica Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC	2	US 115V	Un-shielded	2m	NA
2	DC	1	US 115V	Un-shielded	1m	NA
3	Jack	1	Earphone	Un-shielded	0.5m	NA
4	RF In/Out	1	Antenna	Un-shielded	none	NA

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

TEST SETUP

TEST SETUP- CONDUCTED PORT

The EUT was tested connected to a host Laptop via USB cable adapter and spectrum analyzer to antenna port. Test software exercised the EUT.

SETUP DIAGRAM

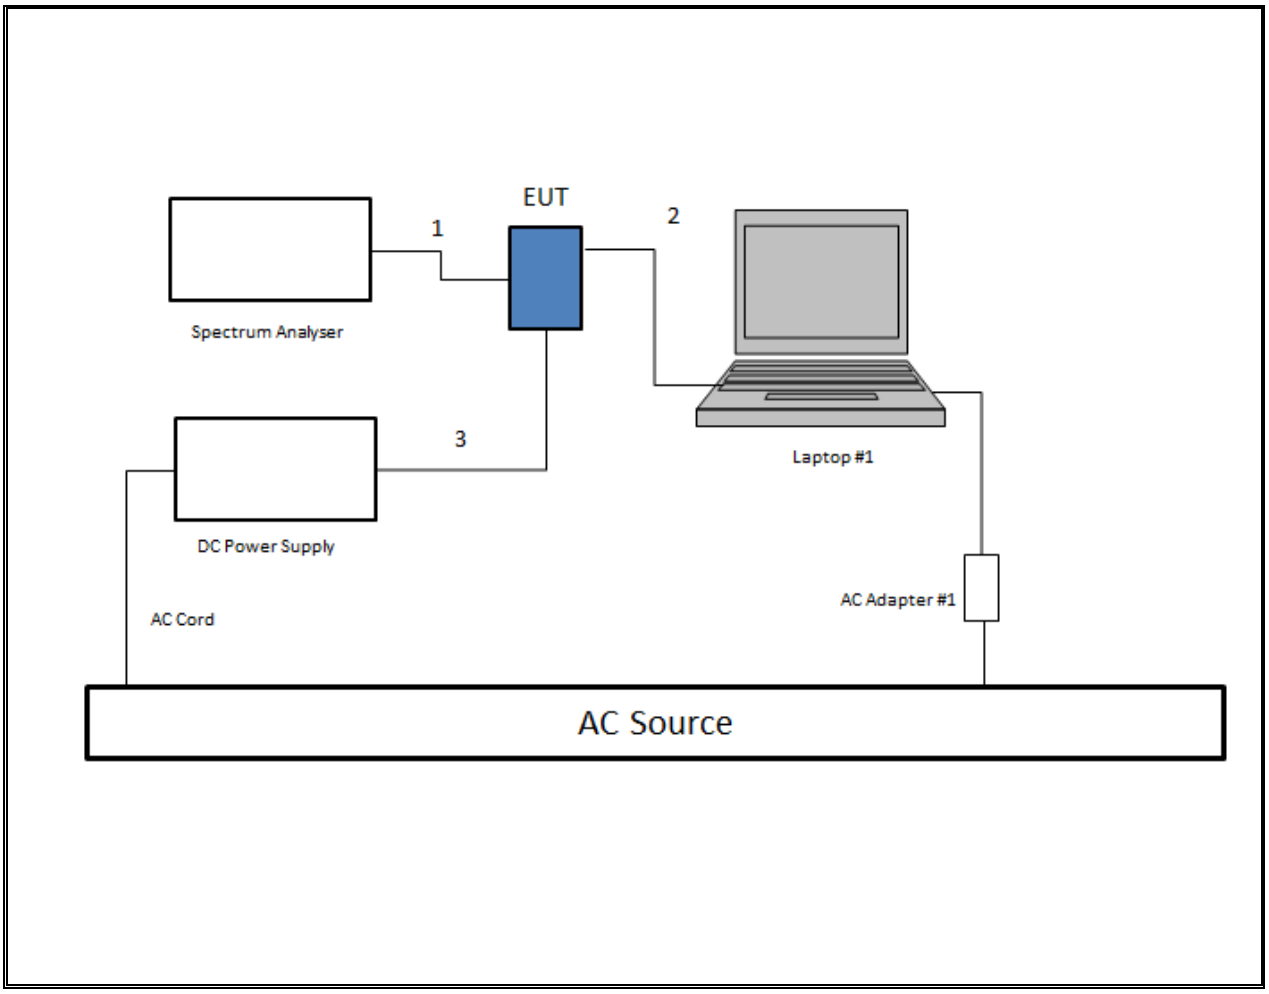

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

TEST SETUP- RADIATED-ABOVE 1 GHZ

The EUT was tested battery powered. Test software exercised the EUT.

SETUP DIAGRAM

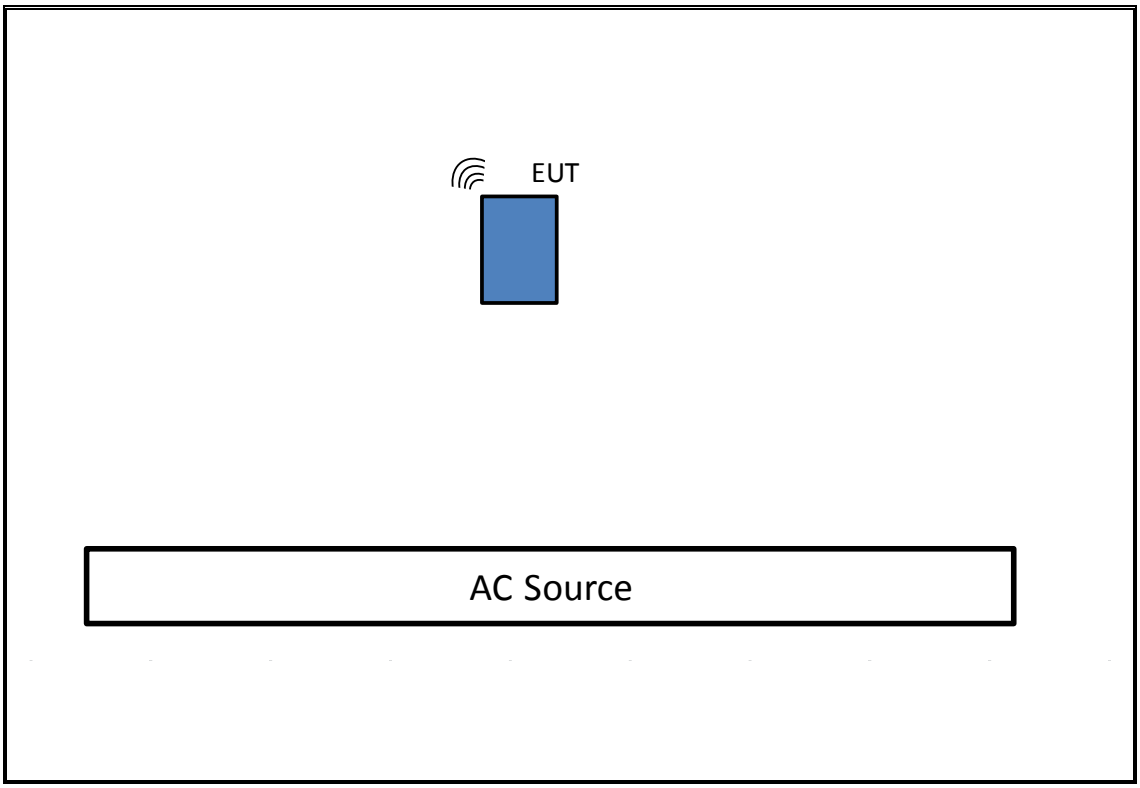

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

TEST SETUP- BELOW 1GHZ & AC LINE CONDUCTED TESTS

The EUT was tested with earphones connected and powered by AC adapter. Test software exercised the EUT.

SETUP DIAGRAM

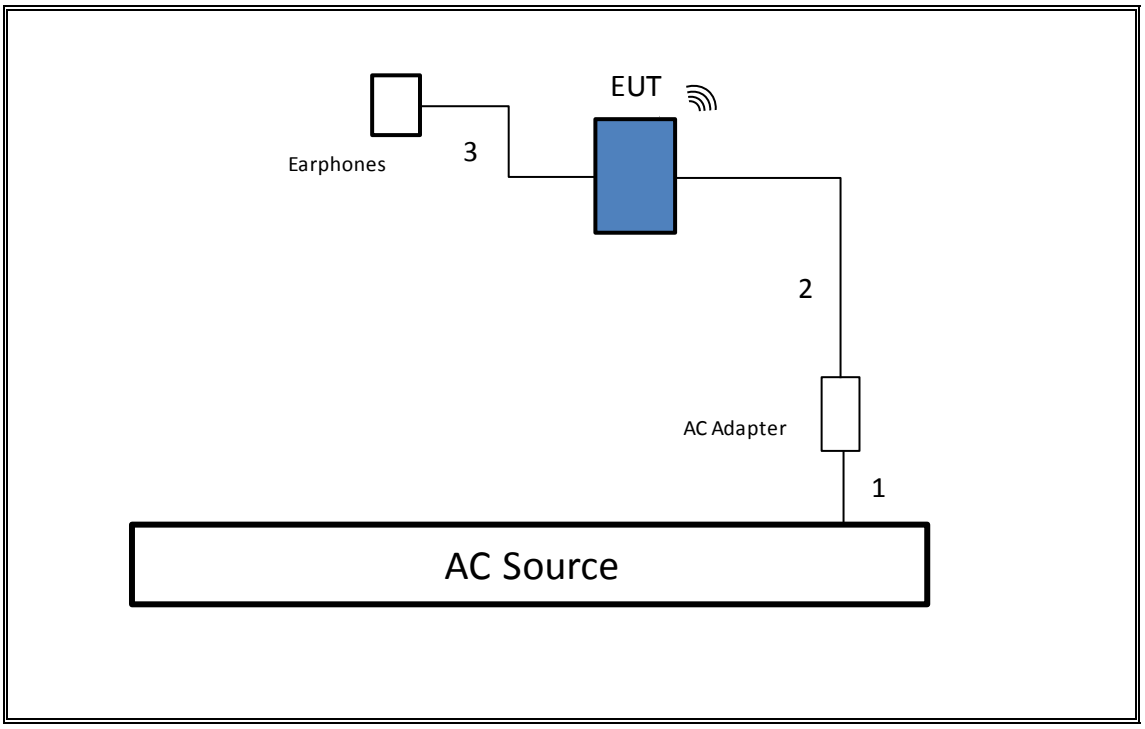

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Antenna, Horn, 18 GHz	ETS Lindgren	3117	F00131	02/18/15
Antenna, Horn, 26.5 GHz	ARA	MWH-1826/B	C00589	11/26/14
Antenna, Horn, 40 GHz	ARA	MWH-2640/B	C00981	06/28/15
Peak / Average Power Sensor	Agilent / HP	N1911A	F00153	03/06/15
Peak Power Meter	Agilent / HP	E9323A	F00025	04/30/15
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	F00129	06/25/15
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	F00411	03/21/15
Spectrum Analyzer, 40 GHz	Agilent / HP	8564E	C00951	07/29/14
Antenna, Bilog, 2 GHz	Sunol Sciences	JB1	F00168	03/28/15
Preamplifier, 1300 MHz	Sonoma	310	F00008	05/27/15
Preamplifier, 26.5 GHz	Agilent / HP	8449B	F00165	03/25/15
Preamplifier, 40 GHz	Miteq	NSP4000-SP2	C00990	08/20/14
EMI Test Receiver, 9 kHz-7 GHz	R & S	ESCI 7	F00092	09/05/14
LISN, 30 MHz	FCC	LISN-50/250-25-2	C00626	01/14/15

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

7. MEASUREMENT METHODS

26 dB Emission BW: KDB 789033 D02 v01, Section C.

99% Occupied BW: KDB 789033 D02 v01, Section D.

Power and PSD: KDB 789033 D02 v01, Method SA-1 and SA-1 Alternative.

Power Spectral Density: KDB 789033 D02 v01, Section F.

Unwanted emissions in restricted bands: KDB 789033 D02 v01, Sections G.3, G.4, G.5, and G.6.

Unwanted emissions in non-restricted bands: KDB 789033 D02 v01, Sections G.3, G.4, and G.5.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS

LIMITS

None; for reporting purposes only.

PROCEDURE

KDB 789033 Zero-Span Spectrum Analyzer Method.

8.1. ON TIME AND DUTY CYCLE RESULTS

Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/B Minimum VBW (kHz)
802.11a 1TX	2.064	2.094	0.986	98.57%	0.00	0.010
802.11n HT20 1TX	1.915	1.945	0.985	98.46%	0.00	0.010
802.11n HT40 1TX	1.003	1.023	0.980	98.04%	0.00	0.010
802.11ac VHT80 1TX	0.460	0.479	0.960	96.03%	0.18	2.175

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.2. DUTY CYCLE PLOTS

DUTY CYCLE 802.11a 1TX MODE

DUTY CYCLE 802.11n HT20 1TX MODE

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

DUTY CYCLE 802.11n HT40 1TX MODE

DUTY CYCLE 802.11ac VHT80 1TX MODE

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9. ANTENNA PORT TEST RESULTS

9.1. 802.11a MODE IN THE 5.2 GHz BAND

9.1.1. 26 dB BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5180	21.15
Mid	5200	21.40
High	5240	21.95

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

26 dB BANDWIDTH

BANDWIDTH LOW CH

BANDWIDTH MID CH

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

BANDWIDTH HIGH CH

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.1.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5180	16.507
Mid	5200	16.539
High	5240	16.531

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

99% BANDWIDTH

BANDWIDTH LOW CH

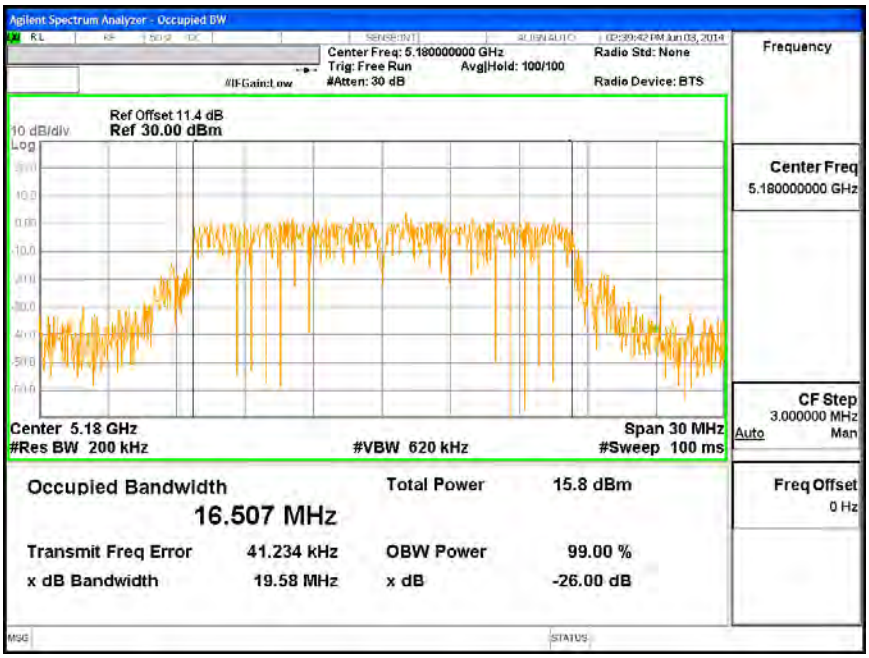

BANDWIDTH MID CH

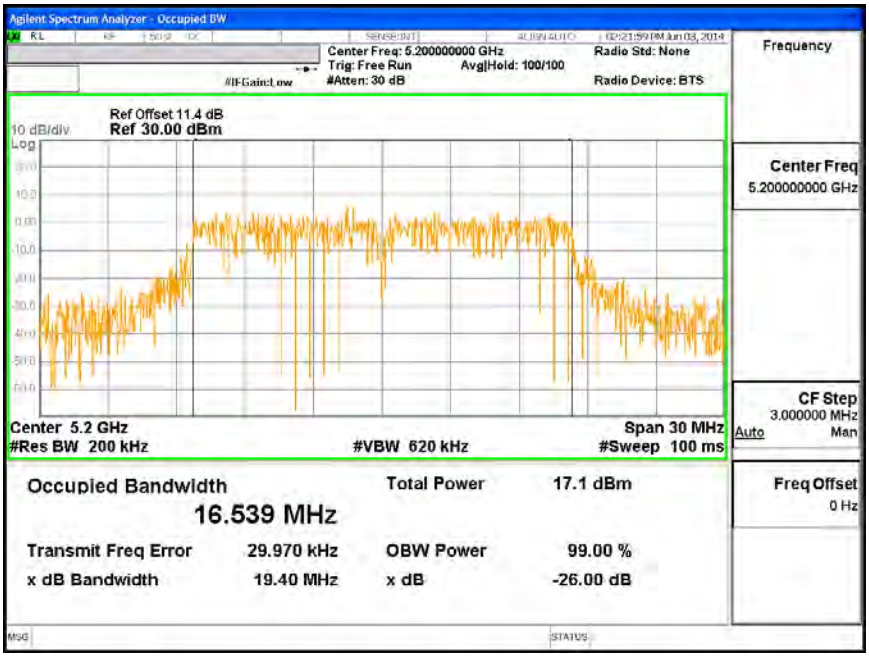

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

BANDWIDTH HIGH CH

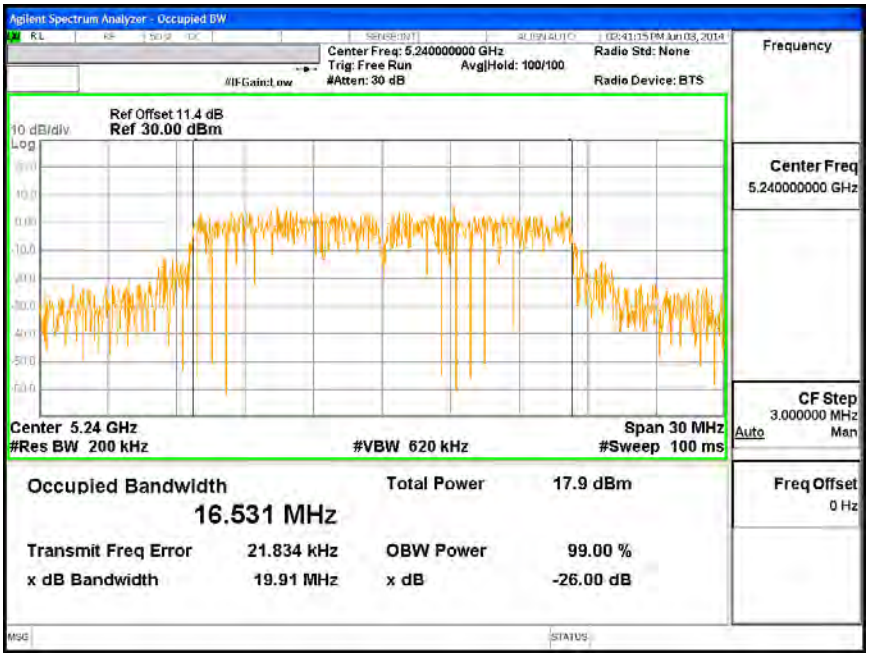

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.1.3. OUTPUT POWER

LIMITS

FCC §15.407 (a) (1)

For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. The maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

The transmitter output is connected to a power meter. The power meter was setup for a gated power measurement.

The cable assembly insertion loss of 11.2 dB (including 10 dB pad and 1.2 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

Antenna Gain (dBi)
-2.56

RESULTS

Channel	Frequency (MHz)	Power (dBm)	Limit (dBm)	Margin (dBm)
Low	5180	15.98	24.00	-8.02
Mid	5200	16.89	24.00	-7.11
High	5240	16.90	24.00	-7.10

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.1.4. PSD

LIMITS

FCC §15.407 (a) (1)

For the band 5.15–5.25 GHz, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

Antenna Gain (dBi)
-2.56

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

RESULTS

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)
Low	5180	21.15	16.507	-2.56
Mid	5200	21.40	16.539	-2.56
High	5240	21.95	16.531	-2.56

Duty Cycle CF (dB)	0.00	**Included in Calculations of Corr'd Power & PSD**

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5180	4.305	4.31	11.00	-6.70
Mid	5200	5.367	5.37	11.00	-5.63
High	5240	6.439	6.44	11.00	-4.56

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701J
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

PSD

PSD LOW CH

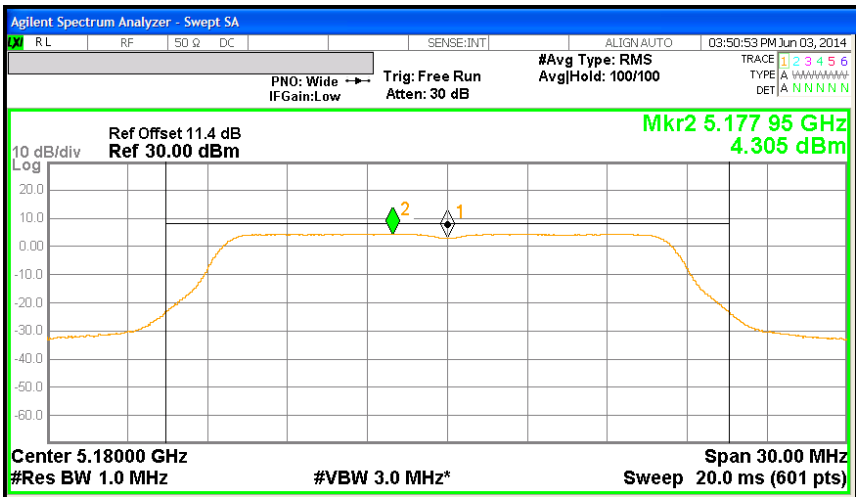

PSD MID CH

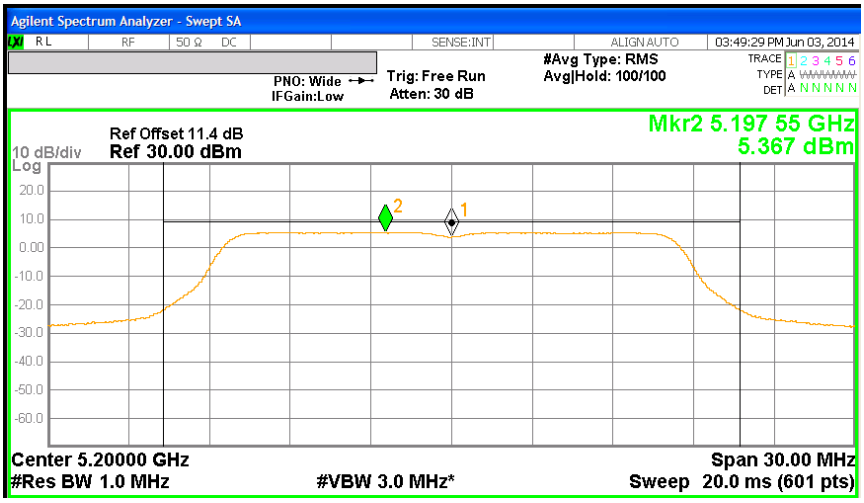

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

PSD HIGH CH

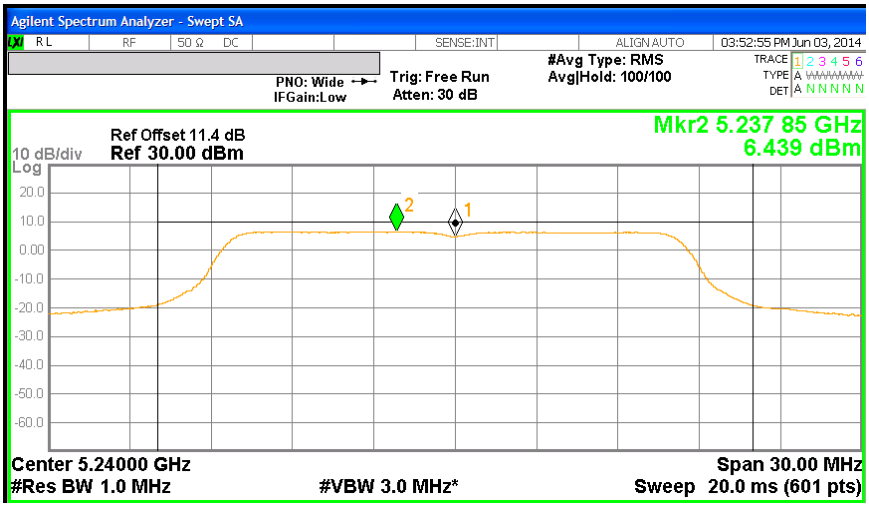

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.2. 802.11n HT20 MODE IN THE 5.2 GHz BAND

9.2.1. 26 dB BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5180	21.50
Mid	5200	22.60
High	5240	21.40

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

26 dB BANDWIDTH

BANDWIDTH LOW CH

BANDWIDTH MID CH

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

BANDWIDTH HIGH CH

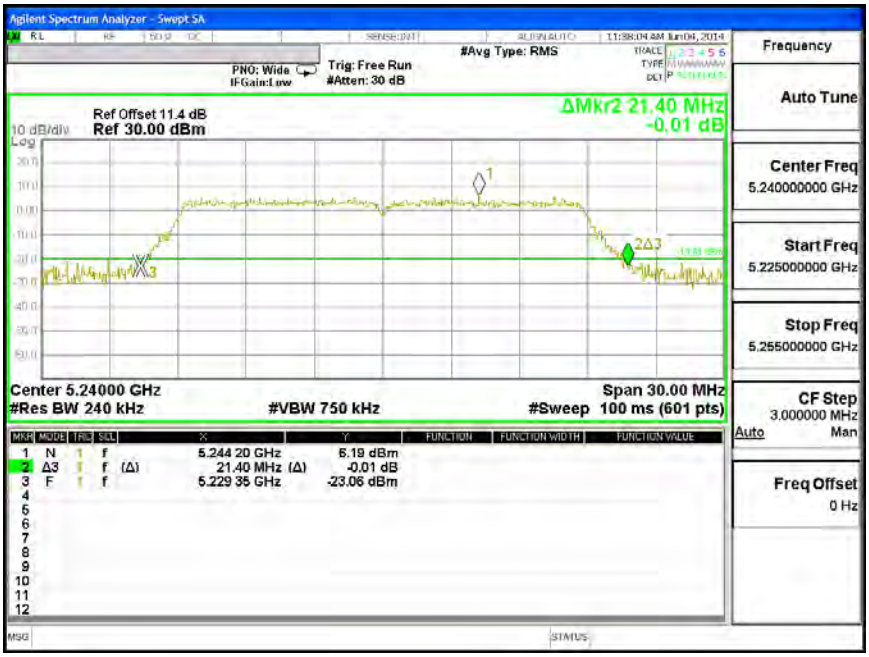

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.2.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5180	17.673
Mid	5200	17.733
High	5240	17.714

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

99% BANDWIDTH

BANDWIDTH LOW CH

BANDWIDTH MID CH

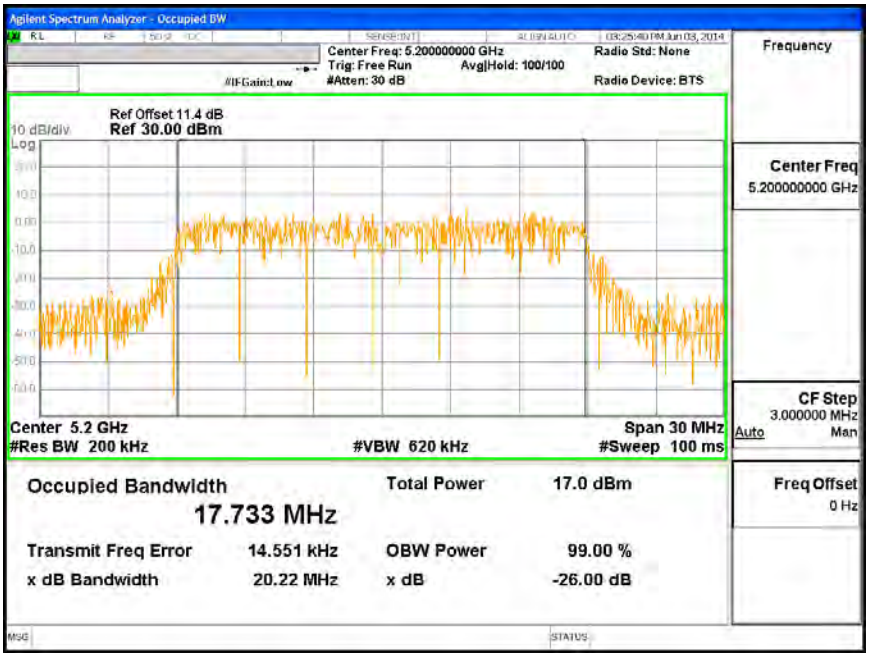

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

BANDWIDTH HIGH CH

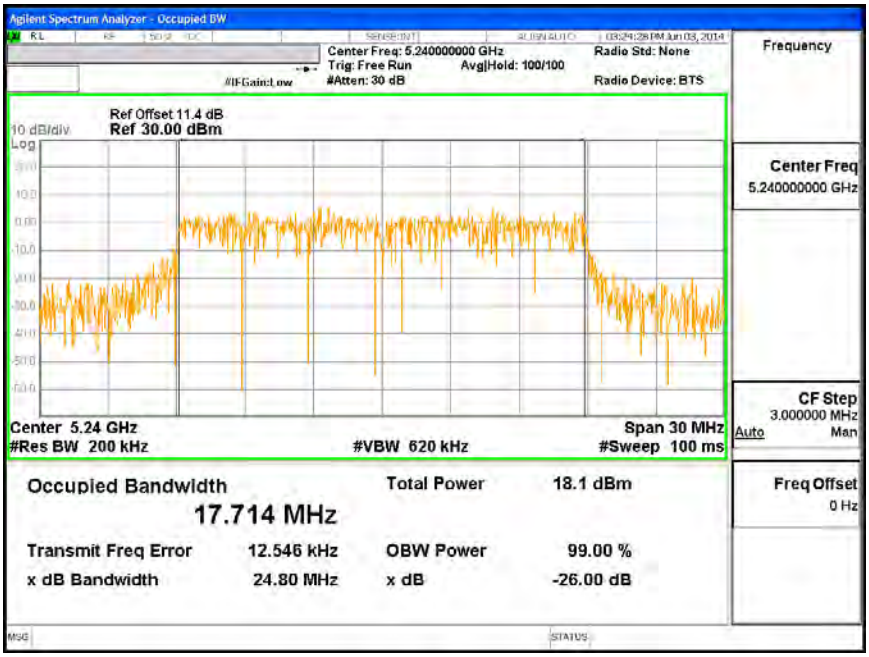

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.2.3. OUTPUT POWER

LIMITS

FCC §15.407 (a) (1)

For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. The maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

The transmitter output is connected to a power meter. The power meter was setup for a gated power measurement.

The cable assembly insertion loss of 11.2 dB (including 10 dB pad and 1.2 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

Antenna Gain (dBi)
-2.56

RESULTS

Channel	Frequency (MHz)	Power (dBm)	Limit (dBm)	Margin (dBm)
Low	5180	15.98	24	-8.02
Mid	5200	16.86	24	-7.14
High	5240	16.80	24	-7.20

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.2.4. PSD

LIMITS

For the band 5.15–5.25 GHz, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

Antenna Gain (dBi)
-2.56

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

RESULTS

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)
Low	5180	21.50	17.673	-2.56
Mid	5200	22.60	17.733	-2.56
High	5240	21.40	17.714	-2.56

Duty Cycle CF (dB)	0.00	**Included in Calculations of Corr'd Power & PSD**

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5180	4.035	4.04	11.00	-6.97
Mid	5200	5.070	5.07	11.00	-5.93
High	5240	6.026	6.03	11.00	-4.97

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701J
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

PSD

PSD LOW CH

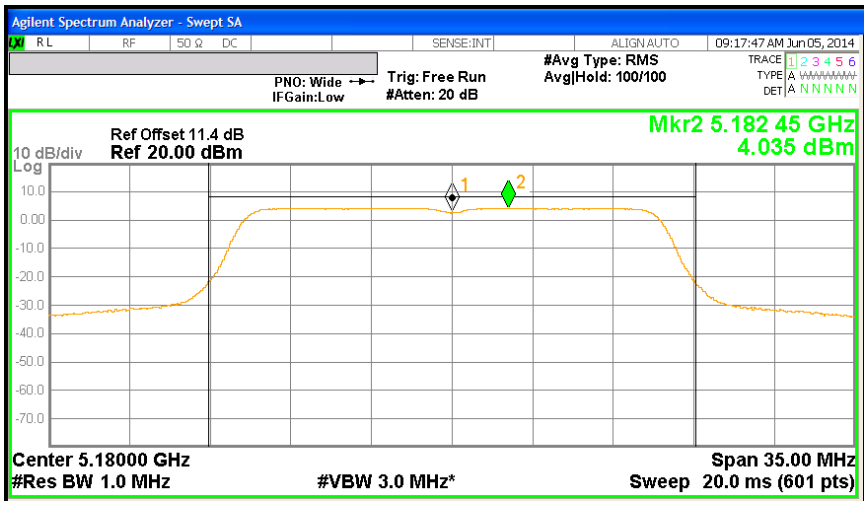

PSD MID CH

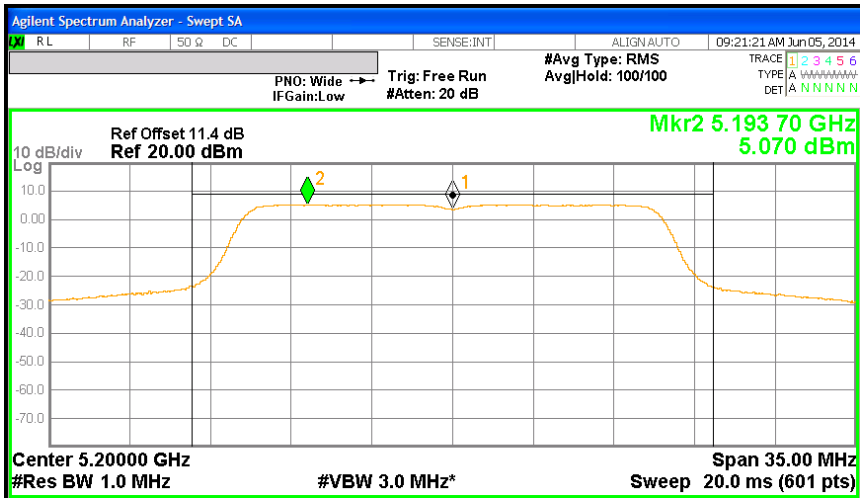

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

PSD HIGH CH

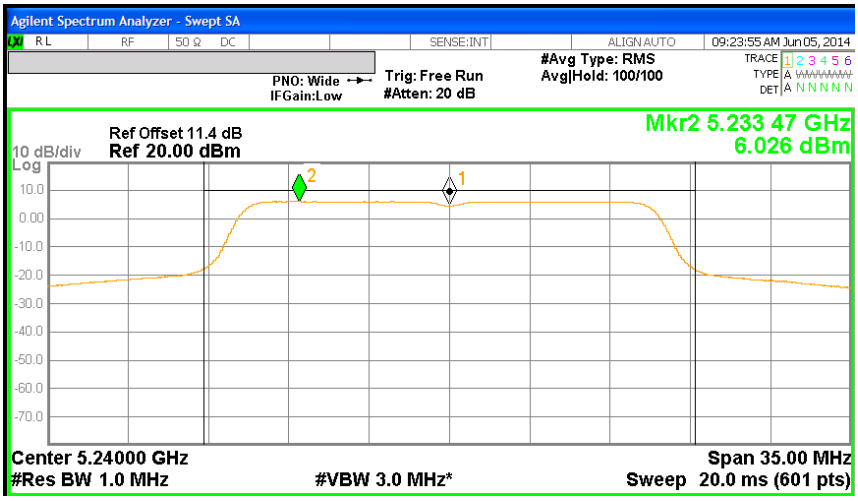

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.3. 802.11n HT40 MODE IN THE 5.2 GHz BAND

9.3.1. 26 dB BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5190	40.95
High	5230	41.06

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

26 dB BANDWIDTH

BANDWIDTH LOW CH

BANDWIDTH HIGH CH

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.3.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5190	36.250
High	5230	36.171

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701J
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

99% BANDWIDTH

99% BANDWIDTH, LOW CH

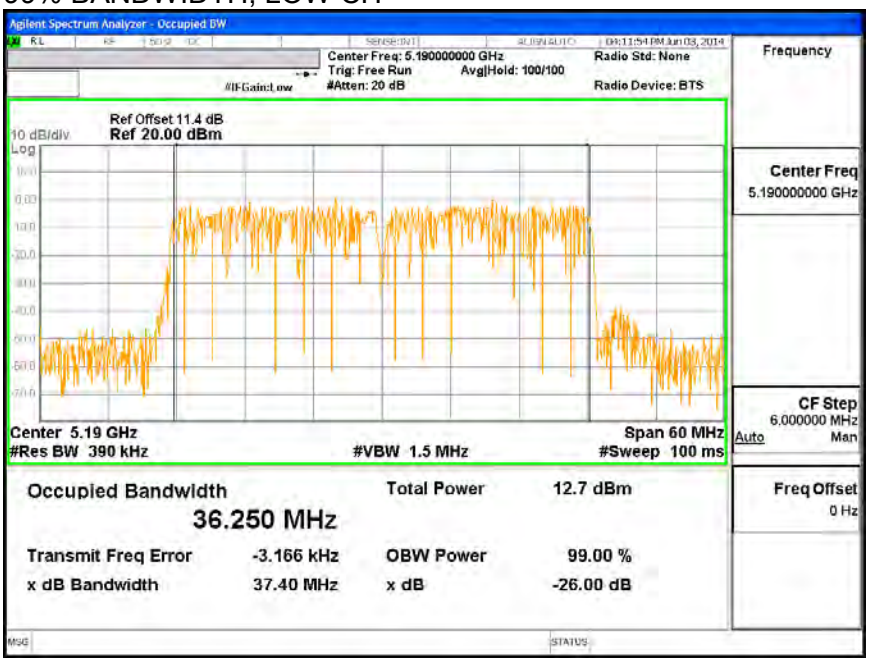

99% BANDWIDTH, HIGH CH

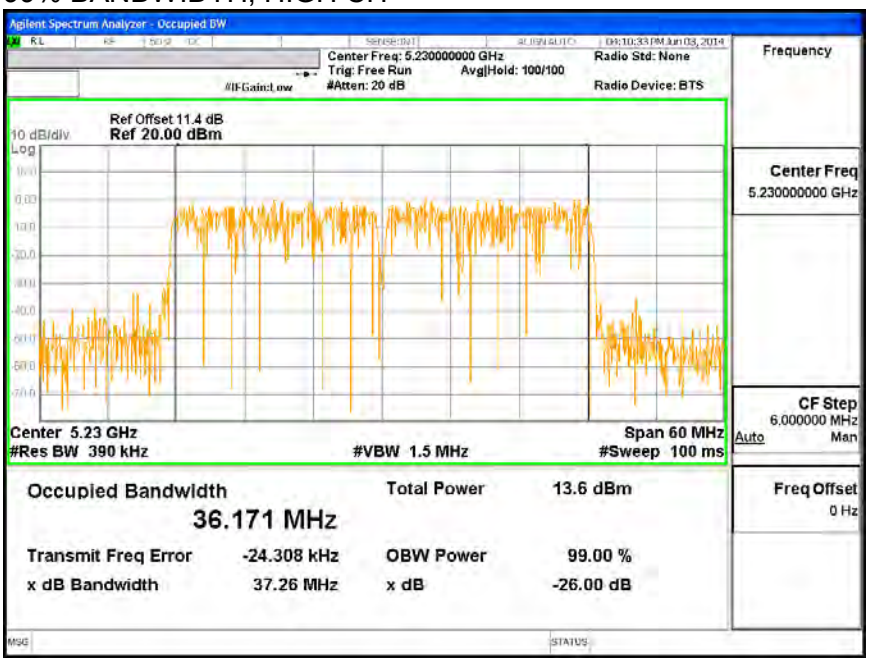

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.3.3. OUTPUT POWER

LIMITS

FCC §15.407 (a) (1)

For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. The maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

The transmitter output is connected to a power meter. The power meter was setup for a gated power measurement.

The cable assembly insertion loss of 11.2 dB (including 10 dB pad and 1.2 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

Antenna Gain (dBi)
-2.56

RESULTS

Channel	Frequency (MHz)	Power (dBm)	Limit (dBm)	Margin (dBm)
Low	5190	12.57	24	-11.43
High	5230	16.82	24	-7.18

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.3.4. PSD

LIMITS

FCC §15.407 (a) (1)

For the band 5.15–5.25 GHz, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

Antenna Gain (dBi)
-2.56

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

RESULTS

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)
Low	5190	40.95	36.250	-2.56
High	5230	41.06	36.171	-2.56

Duty Cycle CF (dB)	0.00	**Included in Calculations of Corr'd Power & PPSD**

PPSD Results

Channel	Frequency (MHz)	Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5190	-2.154	-2.15	11.00	-13.15
High	5230	-1.454	-1.45	11.00	-12.45

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701J
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

PSD

PSD LOW CH

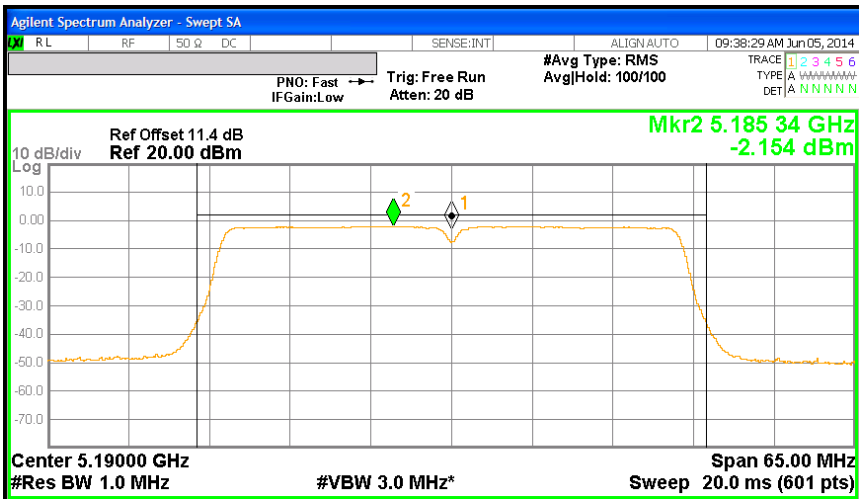

PSD HIGH CH

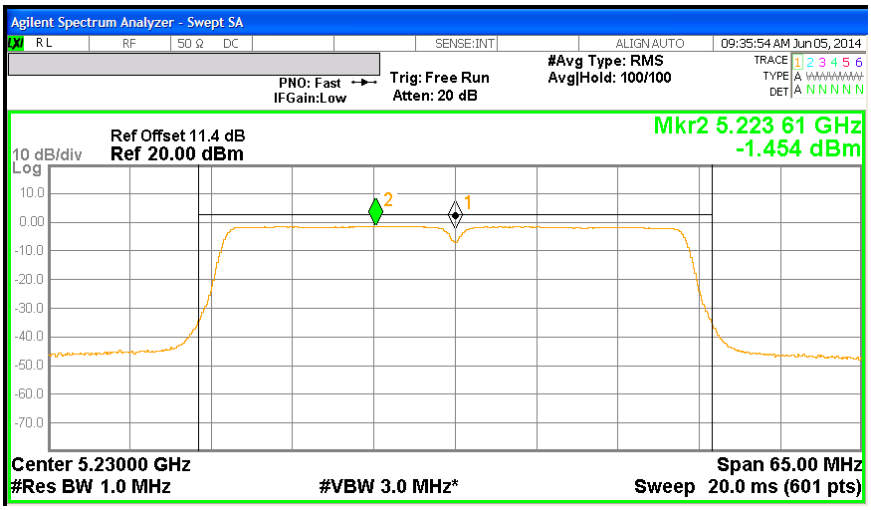

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.4. 802.11ac 80MHz 1TX SISO MODE IN THE 5.2 GHz BAND

9.4.1. 26 dB BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
42	5210	82.50

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701J
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

26 dB BANDWIDTH

BANDWIDTH CH 42

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.4.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
42	5210	75.696

99% BANDWIDTH

99% BANDWIDTH, CH 42

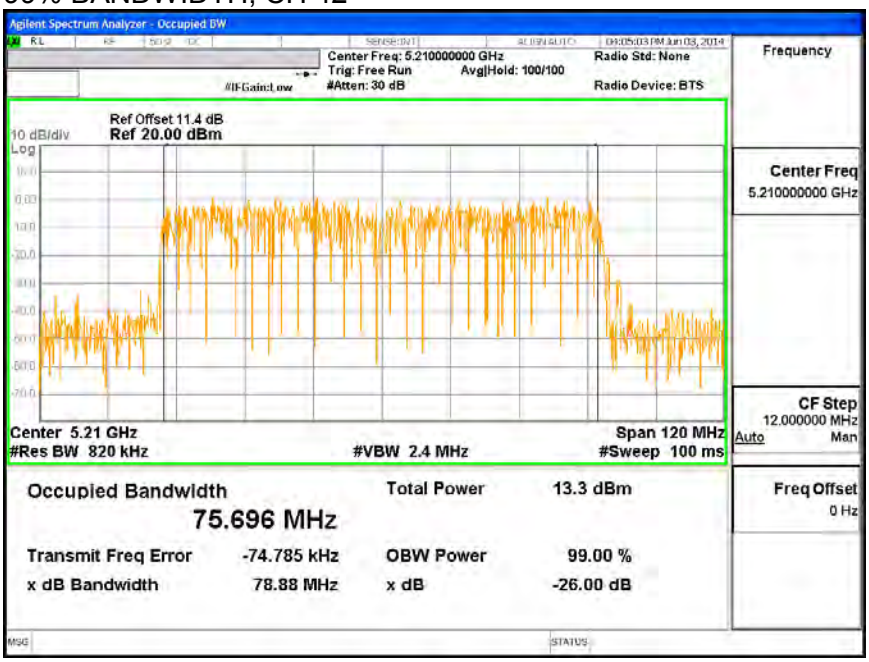

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.4.3. OUTPUT POWER

LIMITS

FCC §15.407 (a) (1)

For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. The maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

The transmitter output is connected to a power meter. The power meter was setup for a gated power measurement.

The cable assembly insertion loss of 11.38 dB (including 10 dB pad, 1.2 dB cable and 0.18dB duty cycle correction factor) was entered as an offset in the power meter to allow for direct reading of power.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

Antenna Gain (dBi)
-2.56

RESULTS

Channel	Frequency (MHz)	Power (dBm)	Limit (dBm)	Margin (dBm)
42	5210	12.78	24	-11.22

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701J
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.4.4. PSD

LIMITS

FCC §15.407 (a) (1)

For the band 5.15–5.25 GHz, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

Antenna Gain (dBi)
-2.56

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

RESULTS

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)
42	5210	82.50	75.696	-2.56

Duty Cycle CF (dB)	0.18	Included in Calculations of Corr'd Power & PSD

PPSD Results

Channel	Frequency (MHz)	Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
42	5210	-4.702	-4.52	11.00	-15.52

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701J
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

PSD

PSD CH 42

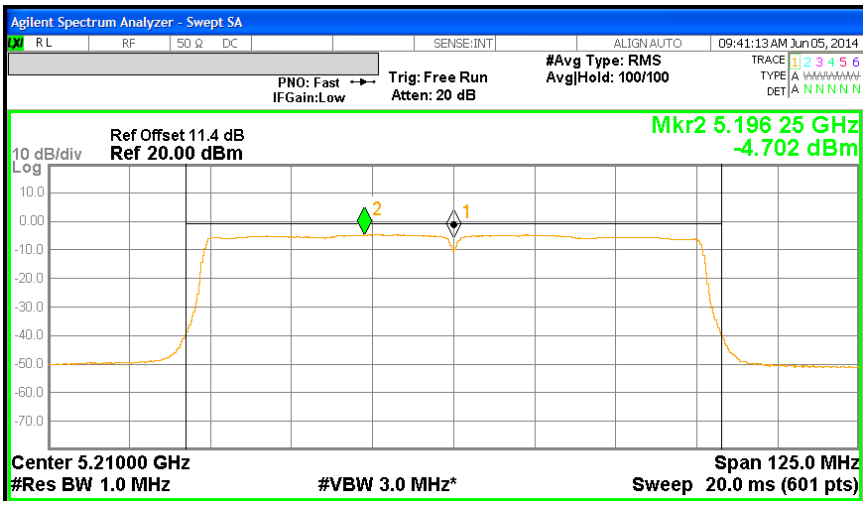

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.5. 802.11a MODE IN THE 5.3 GHz BAND

9.5.1. 26 dB BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5260	21.64
Mid	5300	21.29
High	5320	21.41

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

26 dB BANDWIDTH

BANDWIDTH LOW CH

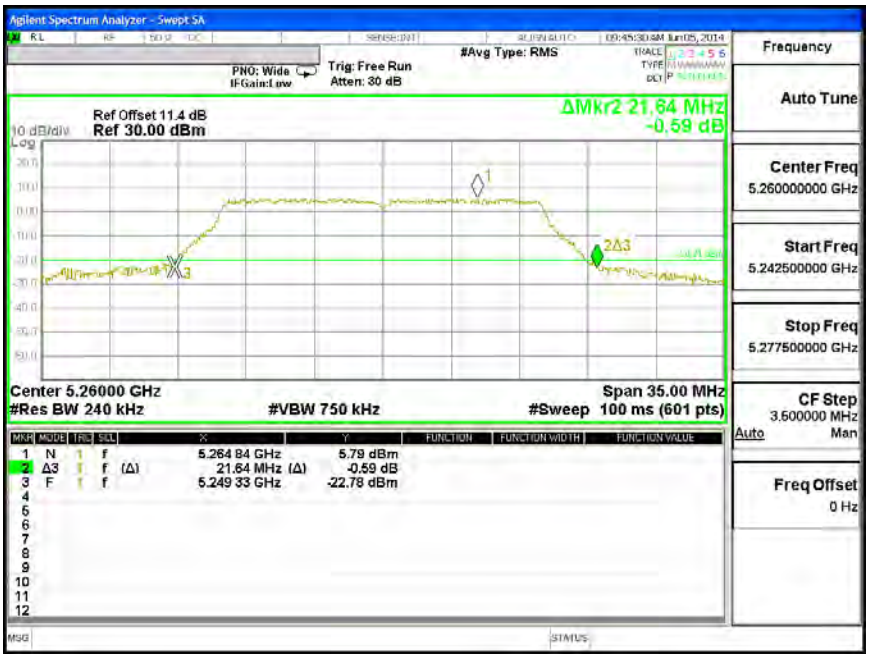

BANDWIDTH MID CH

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

BANDWIDTH HIGH CH

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.5.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5260	16.664
Mid	5300	16.523
High	5320	16.520

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

99% BANDWIDTH

BANDWIDTH LOW CH

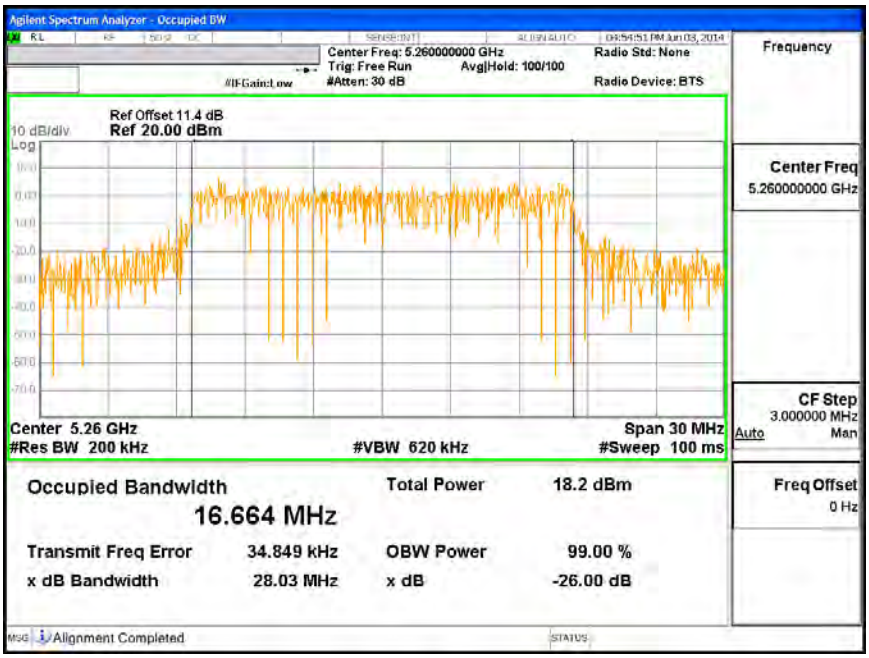

BANDWIDTH MID CH

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

BANDWIDTH HIGH CH

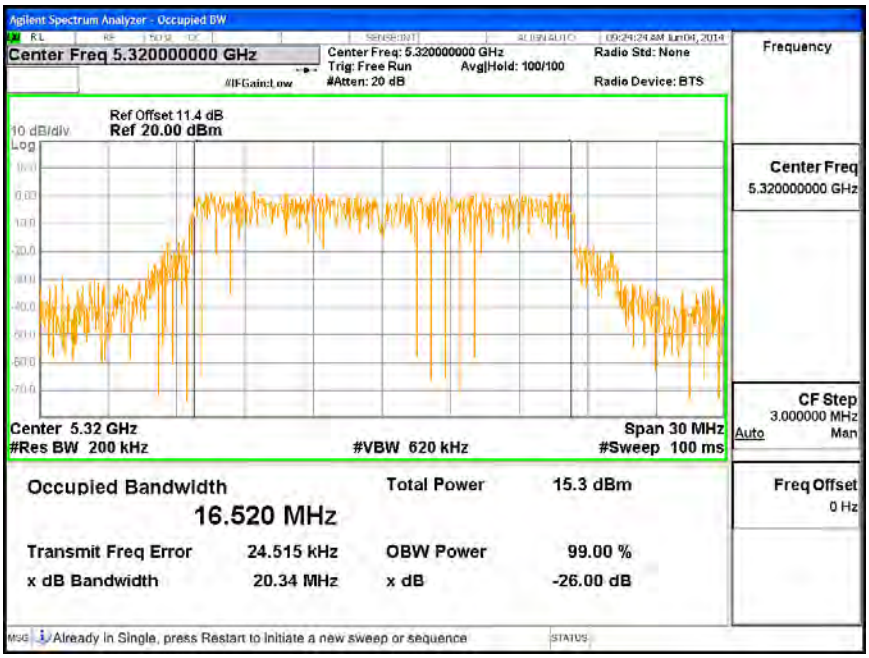

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.5.3. OUTPUT POWER

LIMITS

FCC §15.407 (a) (1)

For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. The maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

The transmitter output is connected to a power meter. The power meter was setup for a gated power measurement.

The cable assembly insertion loss of 11.2 dB (including 10 dB pad and 1.2 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

Antenna Gain (dBi)
-1.46

RESULTS

Channel	Frequency (MHz)	Power (dBm)	Limit (dBm)	Margin (dBm)
Low	5260	16.50	24	-7.50
Mid	5300	16.43	24	-7.57
High	5320	16.45	24	-7.55

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.5.4. PSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.15–5.25 GHz, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

Antenna Gain (dBi)
-1.46

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701J
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

RESULTS

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)
Low	5260	21.64	16.664	-1.46
Mid	5300	21.29	16.523	-1.46
High	5320	21.41	16.520	-1.46

Duty Cycle CF (dB)	0.00	**Included in Calculations of Corr'd Power & PSD**

PPSD Results

Channel	Frequency (MHz)	Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5260	6.383	6.38	11.00	-4.62
Mid	5300	4.085	4.09	11.00	-6.92
High	5320	3.414	3.41	11.00	-7.59

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701J
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

PSD

PSD LOW CH

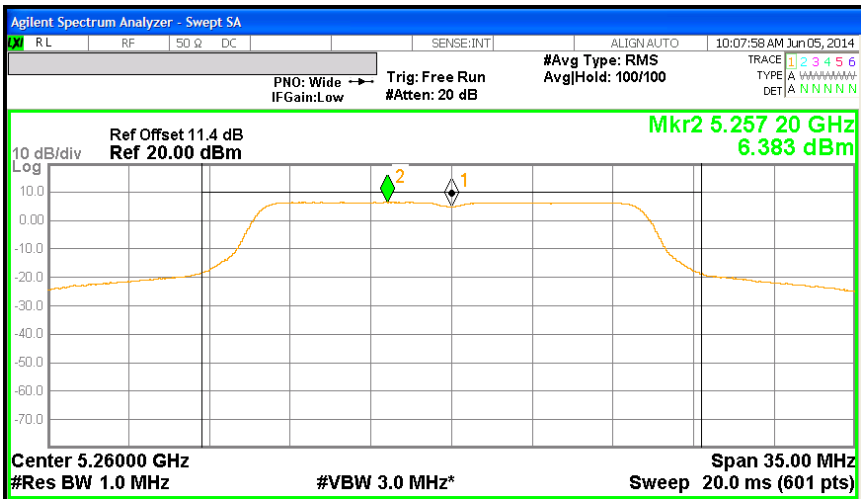

PSD MID CH

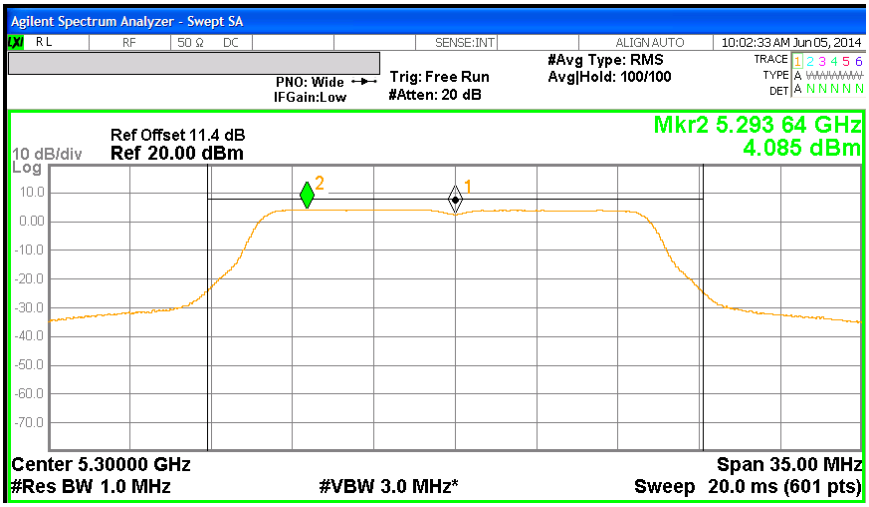

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

PSD HIGH CH

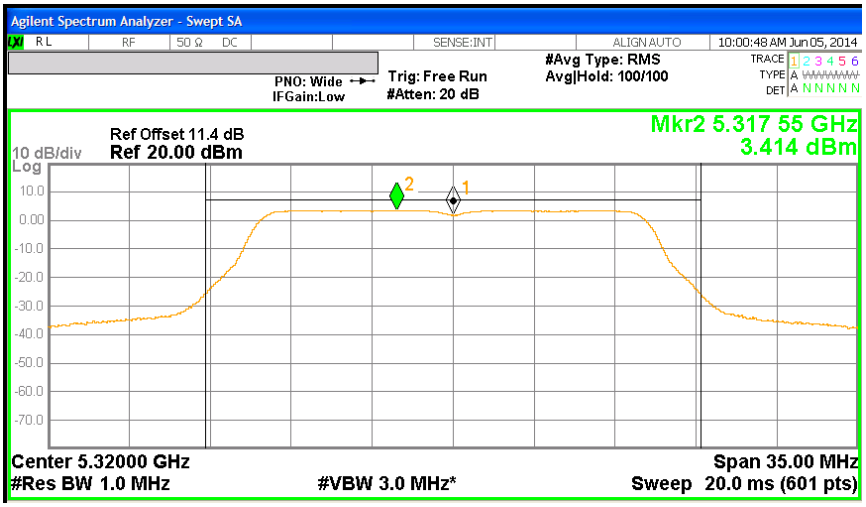

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.6. 802.11n HT20 MODE IN THE 5.3 GHz BAND

9.6.1. 26 dB BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5260	21.85
Mid	5300	21.45
High	5320	21.65

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

26 dB BANDWIDTH

BANDWIDTH LOW CH

BANDWIDTH MID CH

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

BANDWIDTH HIGH CH

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.6.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5260	17.820
Mid	5300	17.652
High	5320	17.758

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

99% BANDWIDTH

BANDWIDTH LOW CH

BANDWIDTH MID CH

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

BANDWIDTH HIGH CH

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.6.3. OUTPUT POWER

LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26–dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

The transmitter output is connected to a power meter. The power meter was setup for a gated power measurement.

The cable assembly insertion loss of 11.2 dB (including 10 dB pad and 1.2 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

Antenna Gain (dBi)
-1.46

RESULTS

Channel	Frequency (MHz)	Power (dBm)	Limit (dBm)	Margin (dBm)
Low	5260	16.49	24	-7.51
Mid	5300	16.40	24	-7.60
High	5320	16.50	24	-7.50

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.6.4. PSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26–dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

Antenna Gain (dBi)
-1.46

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

RESULTS

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)
Low	5260	21.85	17.820	-1.46
Mid	5300	21.45	17.652	-1.46
High	5320	21.65	17.758	-1.46

Duty Cycle CF (dB)	0.00	**Included in Calculations of Corr'd Power & PSD**

PPSD Results

Channel	Frequency (MHz)	Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5260	3.864	3.86	11.00	-7.14
Mid	5300	3.601	3.60	11.00	-7.40
High	5320	2.957	2.96	11.00	-8.04

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701J
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

PSD

PSD LOW CH

PSD MID CH

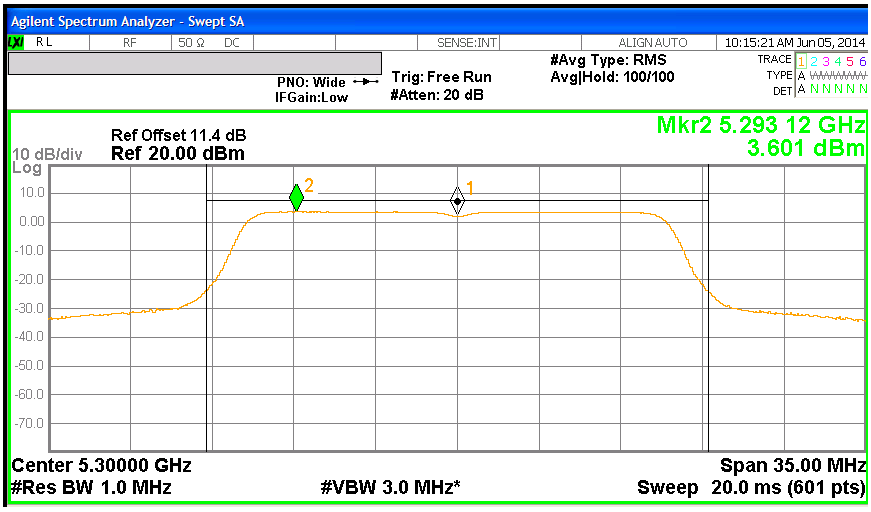

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

PSD HIGH CH

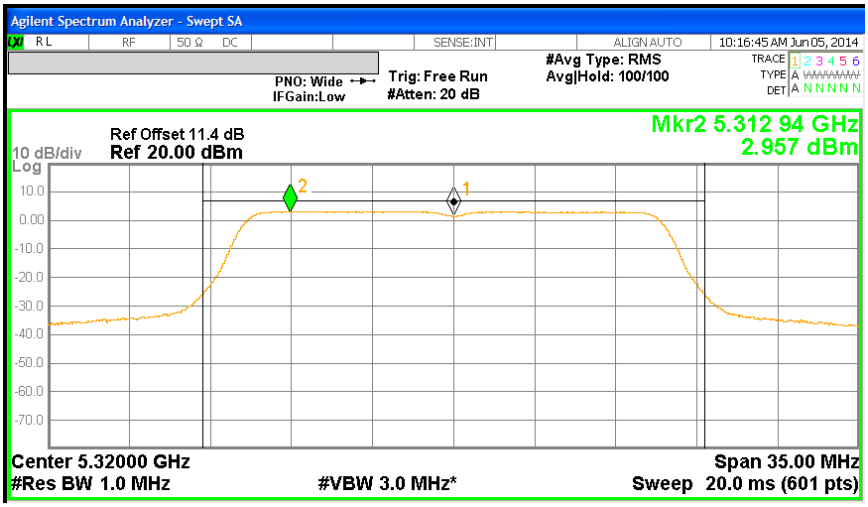

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.7. 802.11n HT40 MODE IN THE 5.3 GHz BAND

9.7.1. 26 dB BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5270	40.95
High	5310	40.63

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

26 dB BANDWIDTH

BANDWIDTH LOW CH

BANDWIDTH HIGH CH

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.7.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5270	36.351
High	5310	36.168

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701J
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

99% BANDWIDTH

99% BANDWIDTH, LOW CH

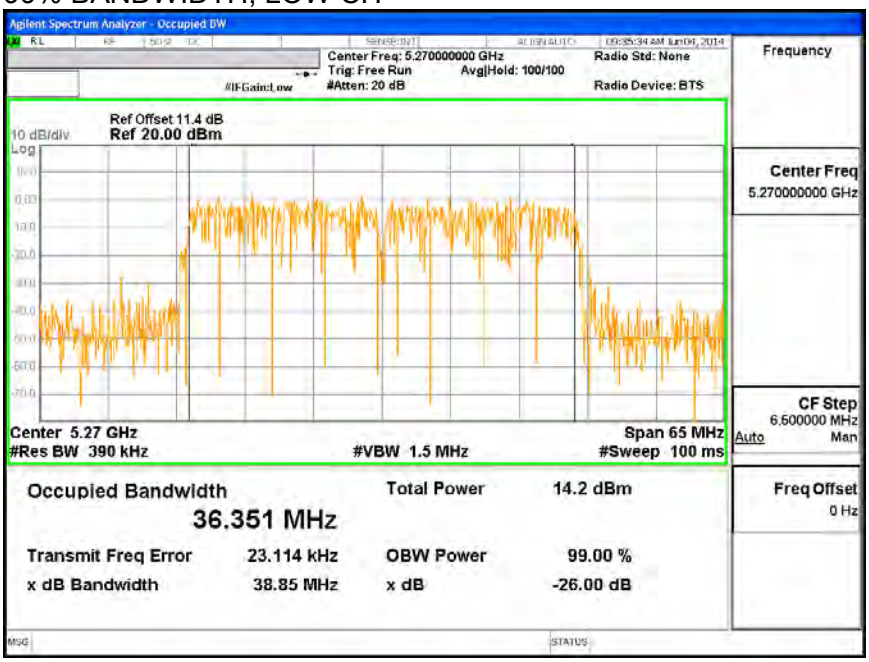

99% BANDWIDTH, HIGH CH

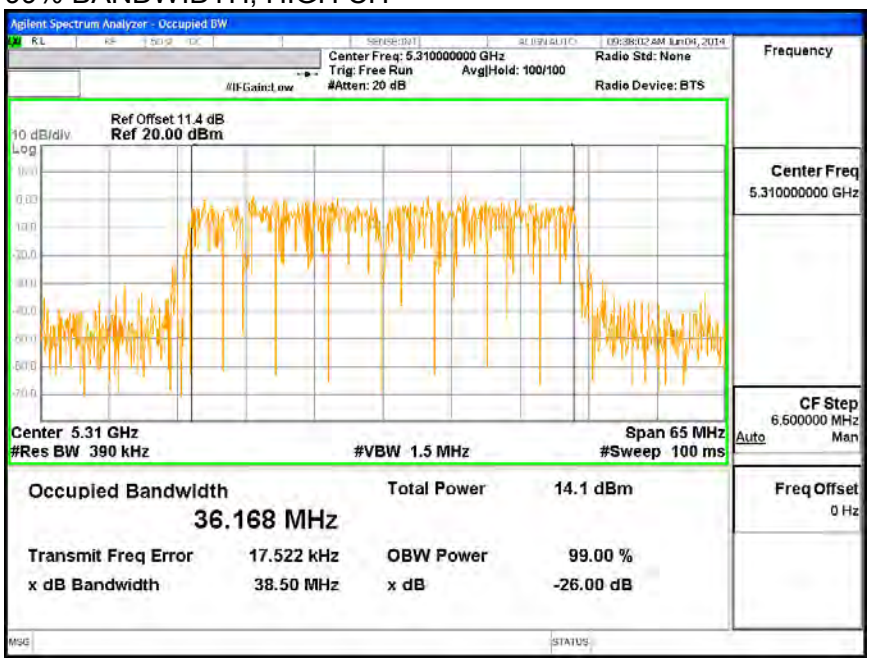

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.7.3. OUTPUT POWER

LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26–dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

The transmitter output is connected to a power meter. The power meter was setup for a gated power measurement.

The cable assembly insertion loss of 11.2 dB (including 10 dB pad and 1.2 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain

Antenna Gain (dBi)
-1.46

RESULTS

Channel	Frequency (MHz)	Power (dBm)	Limit (dBm)	Margin (dBm)
Low	5270	16.45	24	-7.55
High	5310	13.95	24	-10.05

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.7.4. PSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26–dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain

Antenna Gain (dBi)
-1.46

.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

RESULTS

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)
Low	5270	40.95	36.351	-1.46
High	5310	40.63	36.106	-1.46

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD

PPSD Results

Channel	Frequency (MHz)	Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5270	1.985	1.99	11.00	-9.02
High	5310	-0.908	-0.91	11.00	-11.91

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701J
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

PSD

PSD LOW CH

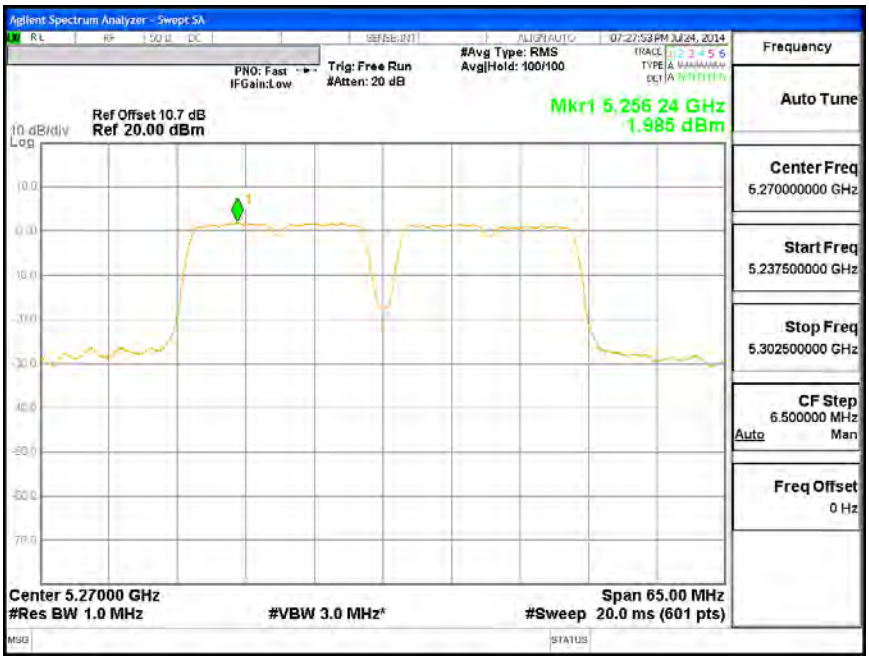

PSD HIGH CH

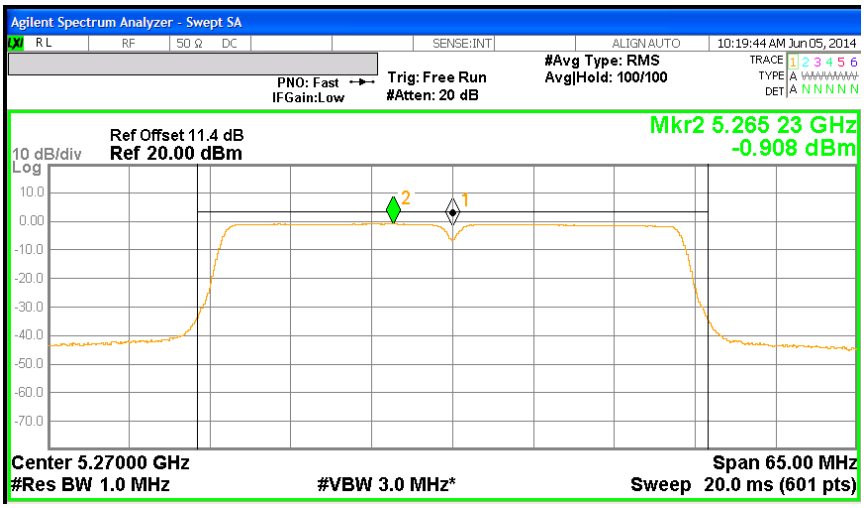

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.8. 802.11ac 80MHz MODE IN THE 5.3 GHz BAND

9.8.1. 26 dB BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
58	5290	83.33

26 dB BANDWIDTH

BANDWIDTH CH 58

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.8.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
58	5290	75.913

99% BANDWIDTH

99% BANDWIDTH, CH 58

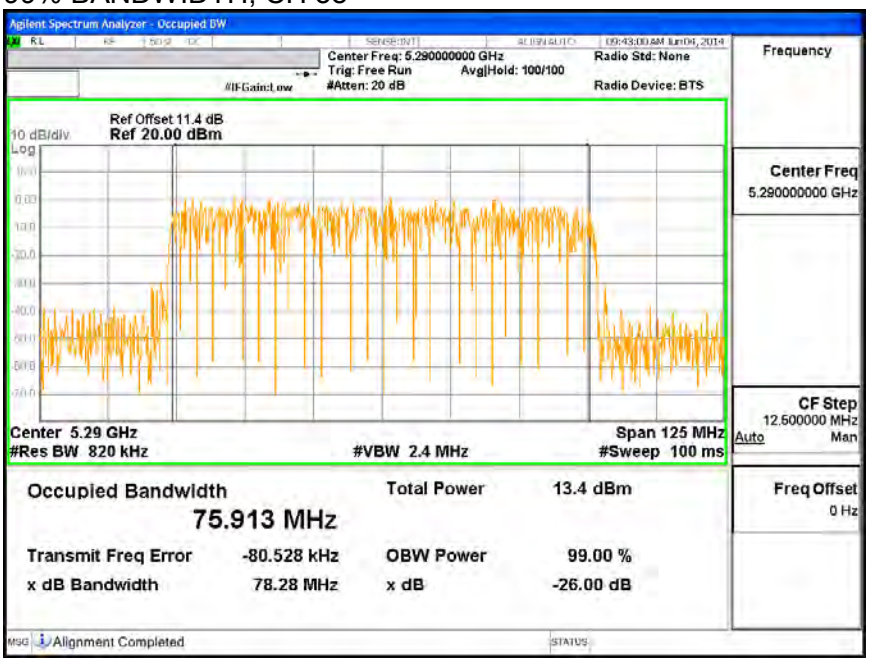

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.8.3. OUTPUT POWER

LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26–dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

The transmitter output is connected to a power meter. The power meter was setup for a gated power measurement.

The cable assembly insertion loss of 11.38 dB (including 10 dB pad, 1.2 dB cable, and 0.18dB duty cycle correction factor) was entered as an offset in the power meter to allow for direct reading of power.

DIRECTIONAL ANTENNA GAIN

Antenna Gain (dBi)
-1.46

RESULTS

Channel	Frequency (MHz)	Power (dBm)	Limit (dBm)	Margin (dBm)
58	5290	12.86	24	-11.14

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701J
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.8.4. PSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26–dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

Antenna Gain (dBi)
-1.46

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701J
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

RESULTS

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)
58	5290	83.33	75.913	-1.46

Duty Cycle CF (dB)	0.18	Included in Calculations of Corr'd Power & PSD

PPSD Results

Channel	Frequency (MHz)	Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	Margin (dB)
58	5290	-4.565	-4.39	11.00	-15.39

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701J
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

PSD

PSD CH 58

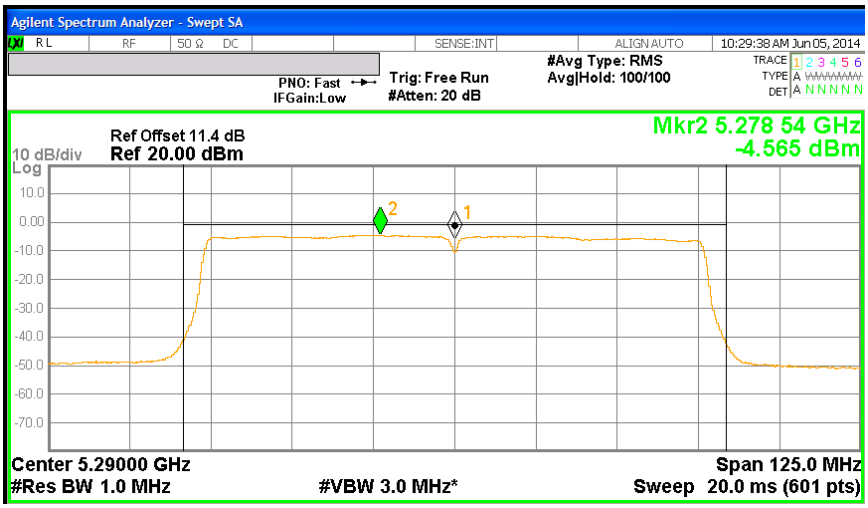

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.9. 802.11a MODE IN THE 5.6 GHz BAND

9.9.1. 26 dB BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5500	21.15
Mid	5580	21.25
High	5700	21.25

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

26 dB BANDWIDTH

BANDWIDTH LOW CH

BANDWIDTH MID CH

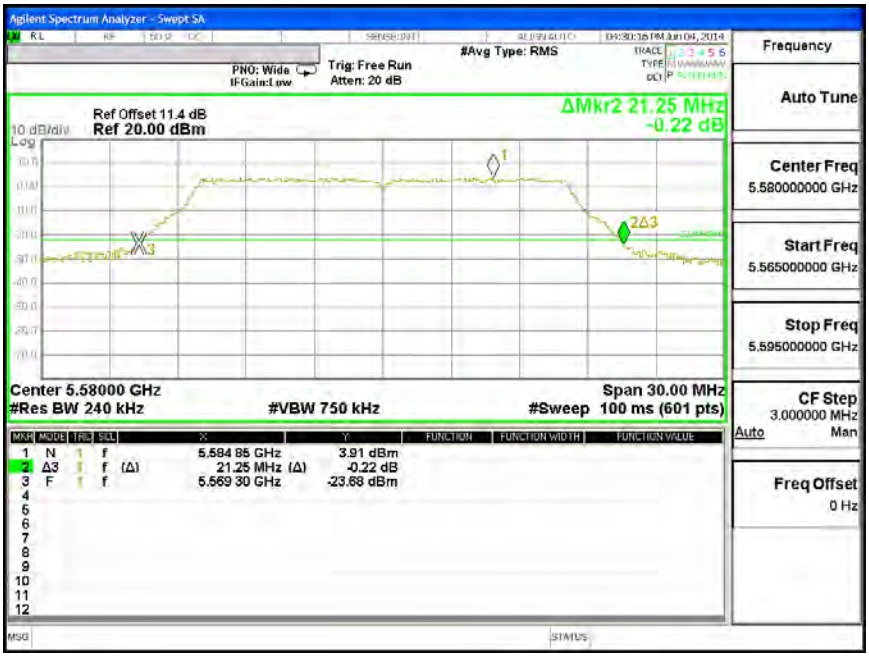

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

BANDWIDTH HIGH CH

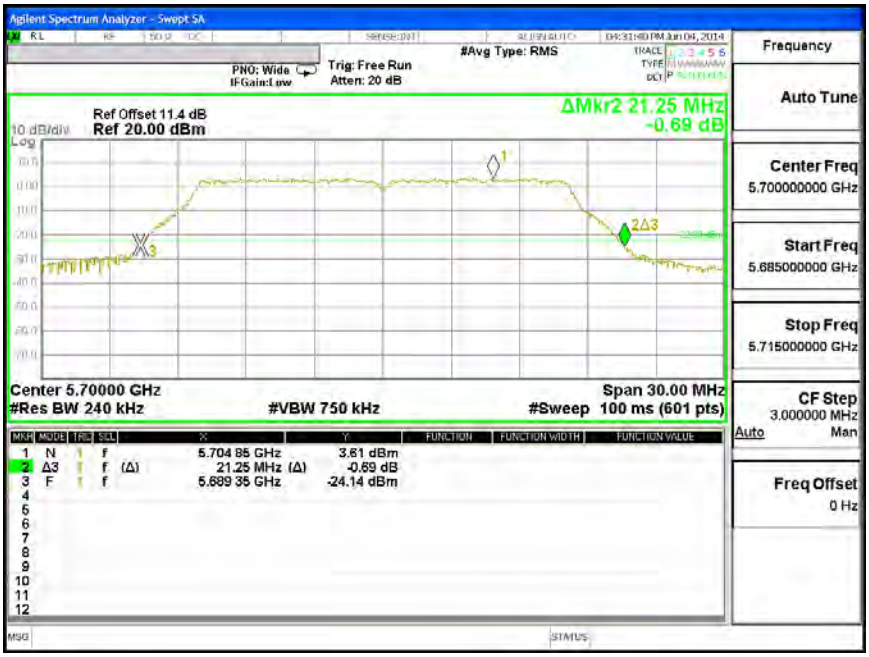

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.9.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5500	16.485
Mid	5580	16.613
High	5700	16.470

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

99% BANDWIDTH

BANDWIDTH LOW CH

BANDWIDTH MID CH

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

BANDWIDTH HIGH CH

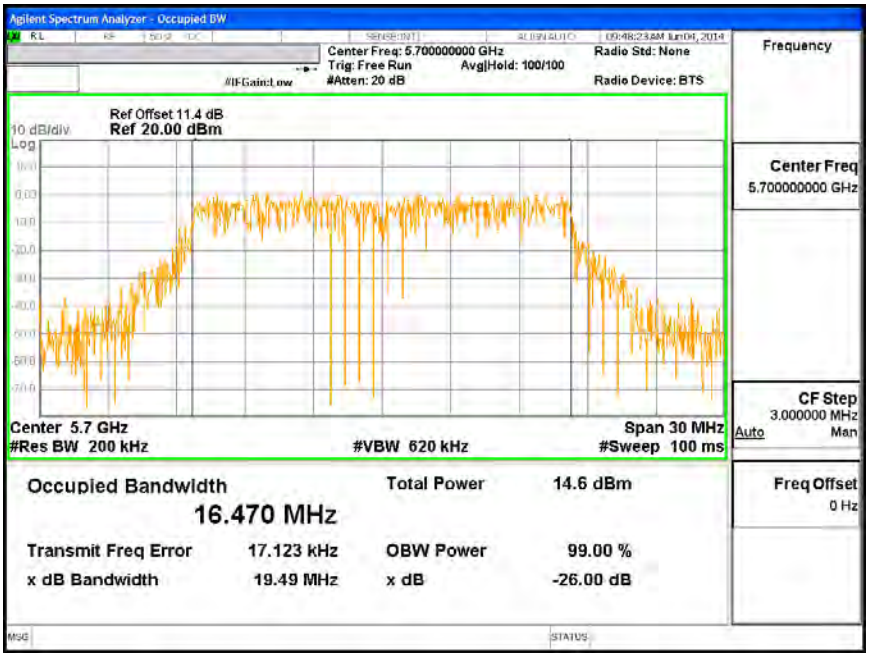

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.9.3. OUTPUT POWER

LIMITS

FCC §15.407 (a) (2)

For the band 5.5–5.7 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26–dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

The transmitter output is connected to a power meter. The power meter was setup for a gated power measurement.

The cable assembly insertion loss of 11.2 dB (including 10 dB pad and 1.2 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

Antenna Gain (dBi)
-0.44

RESULTS

Channel	Frequency (MHz)	Power (dBm)	Limit (dBm)	Margin (dBm)
Low	5500	14.90	24	-9.10
Mid	5580	16.94	24	-7.06
High	5700	15.88	24	-8.12

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.9.4. PSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.5–5.7 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26–dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

Antenna Gain (dBi)
-0.44

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

RESULTS

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)
Low	5500	21.15	16.485	-0.44
Mid	5580	21.25	16.613	-0.44
High	5700	21.25	16.470	-0.44

Duty Cycle CF (dB)	0.00	**Included in Calculations of Corr'd Power & PSD**

PPSD Results

Channel	Frequency (MHz)	Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5500	3.467	3.47	11.00	-7.53
Mid	5580	5.487	5.49	11.00	-5.51
High	5700	2.345	2.35	11.00	-8.66

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701J
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

PSD

PSD LOW CH

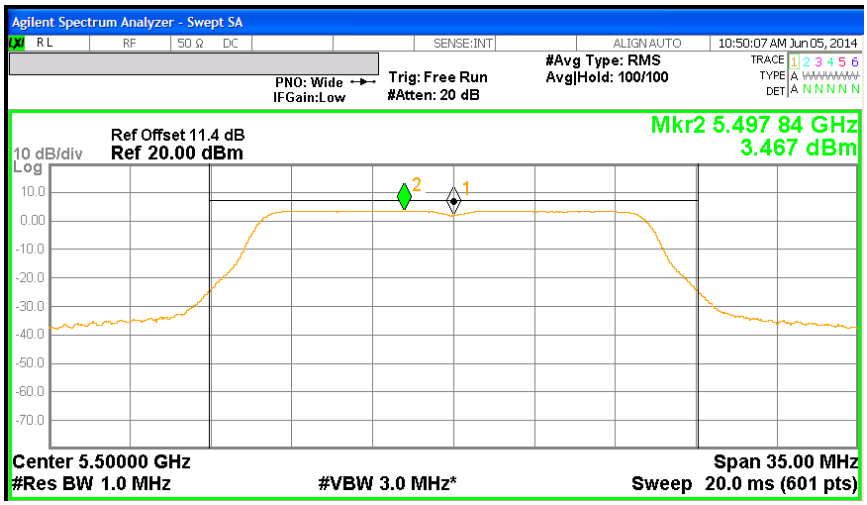

PSD MID CH

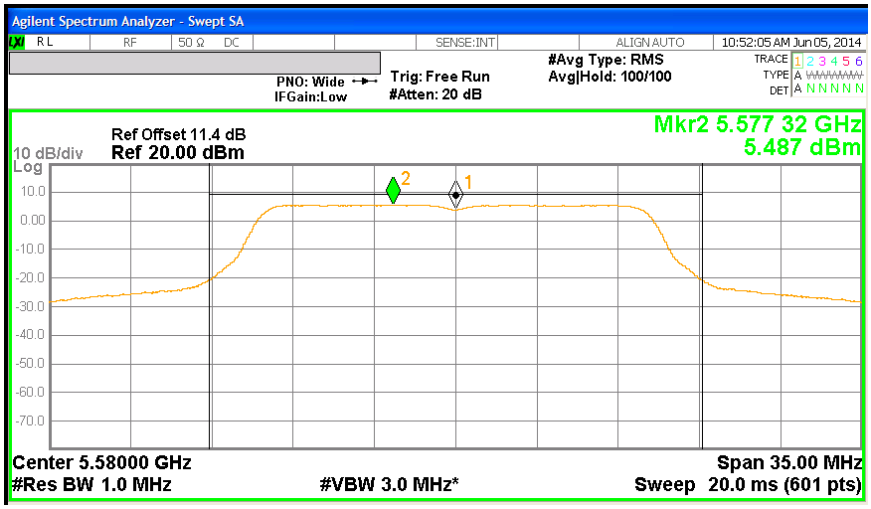

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

PSD HIGH CH

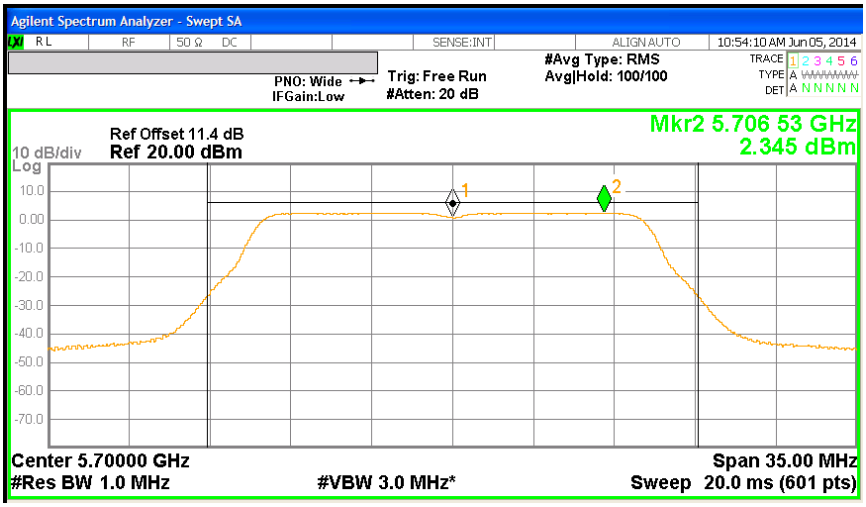

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.10. 802.11n HT20 MODE IN THE 5.6 GHz BAND

9.10.1. 26 dB BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5500	21.55
Mid	5580	21.55
High	5700	21.50
144	5720	21.60

26 dB BANDWIDTH

BANDWIDTH LOW CH

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

BANDWIDTH MID CH

BANDWIDTH HIGH CH

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

BANDWIDTH 144 CH

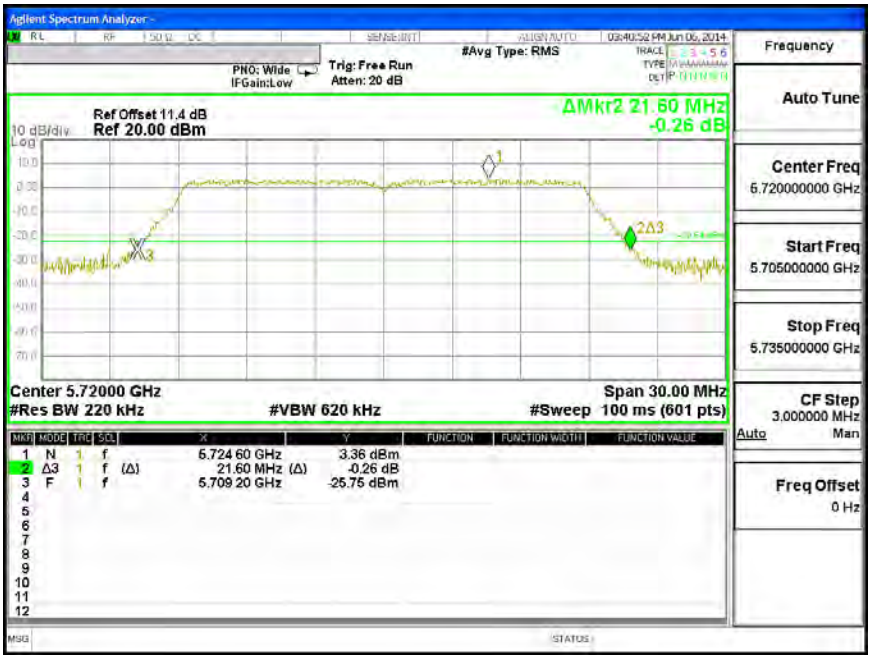

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.10.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5500	17.608
Mid	5580	17.712
High	5700	17.684
144	5720	17.719

99% BANDWIDTH

BANDWIDTH LOW CH

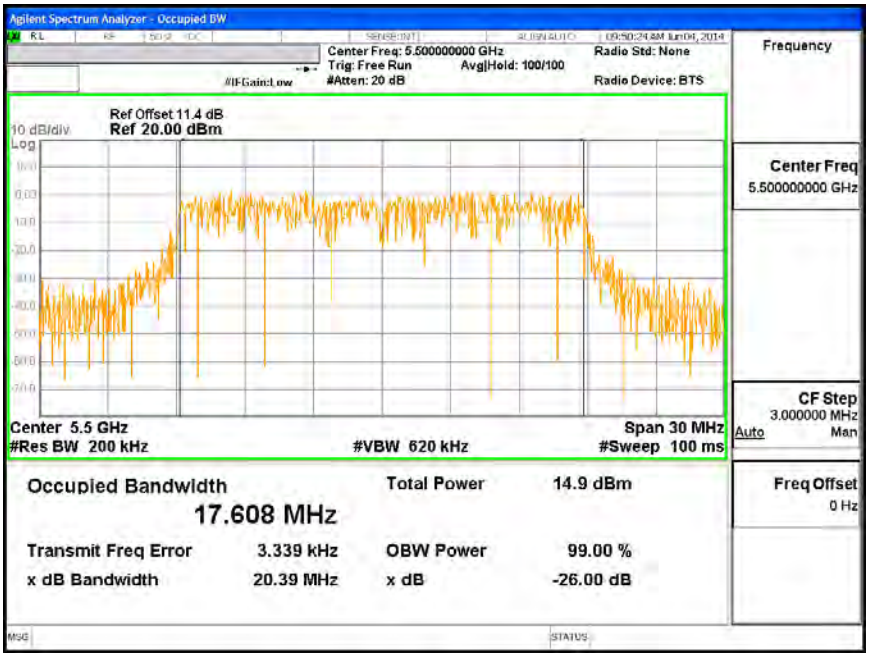

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

BANDWIDTH MID CH

BANDWIDTH HIGH CH

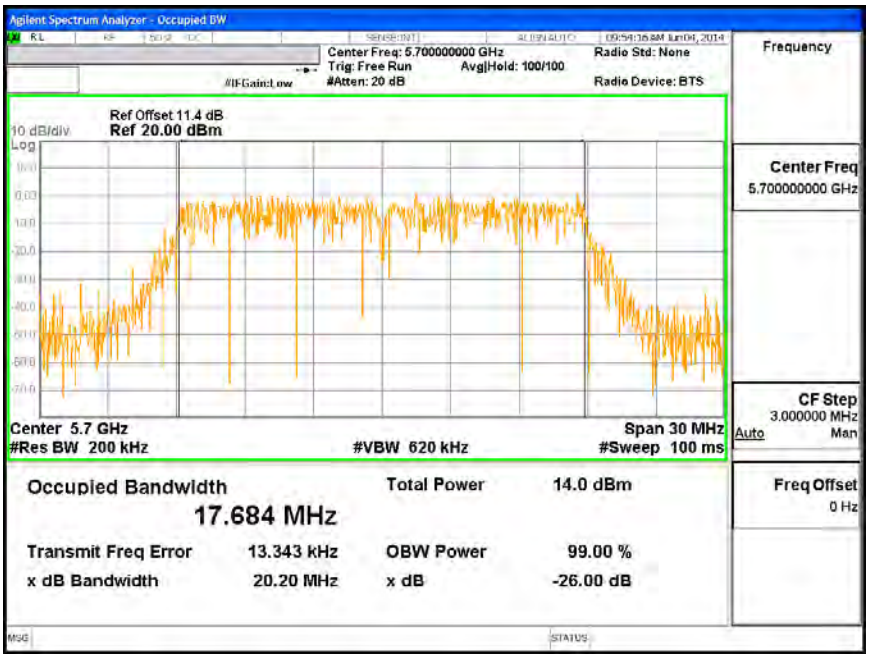

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

BANDWIDTH CH144

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.10.3. OUTPUT POWER

LIMITS

FCC §15.407 (a) (2)

For the band 5.5–5.7 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26–dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

The transmitter output is connected to a power meter. The power meter was setup for a gated power measurement.

The cable assembly insertion loss of 11.2 dB (including 10 dB pad and 1.2 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

Antenna Gain (dBi)
-0.44

RESULTS

Channel	Frequency (MHz)	Power (dBm)	Limit (dBm)	Margin (dBm)
Low	5500	14.98	24	-9.02
Mid	5580	16.96	24	-7.04
High	5700	15.99	24	-8.01

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.10.4. PSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.5–5.7 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26–dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

IC RSS-210 A9.2 (1)

The maximum e.i.r.p. shall not exceed 200 mW or 10 + 10 log10 B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

Antenna Gain (dBi)
-0.44

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

RESULTS

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)
Low	5500	21.55	17.608	-0.44
Mid	5580	21.55	17.712	-0.44
High	5700	21.50	17.684	-0.44

Duty Cycle CF (dB)	0.00	**Included in Calculations of Corr'd Power & PSD**

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5500	3.103	3.10	11.00	-7.90
Mid	5580	5.176	5.18	11.00	-5.82
High	5700	2.202	2.20	11.00	-8.80

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

PSD,

PSD, LOW CH

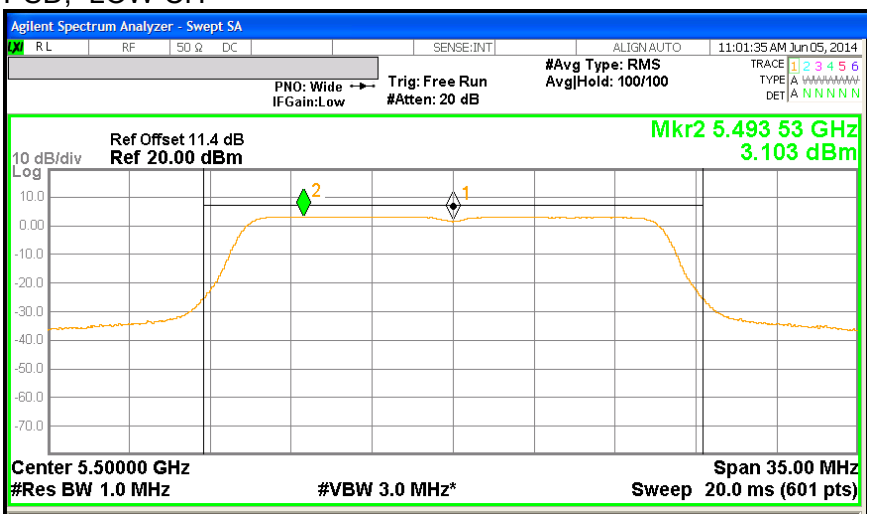

PSD, MID CH

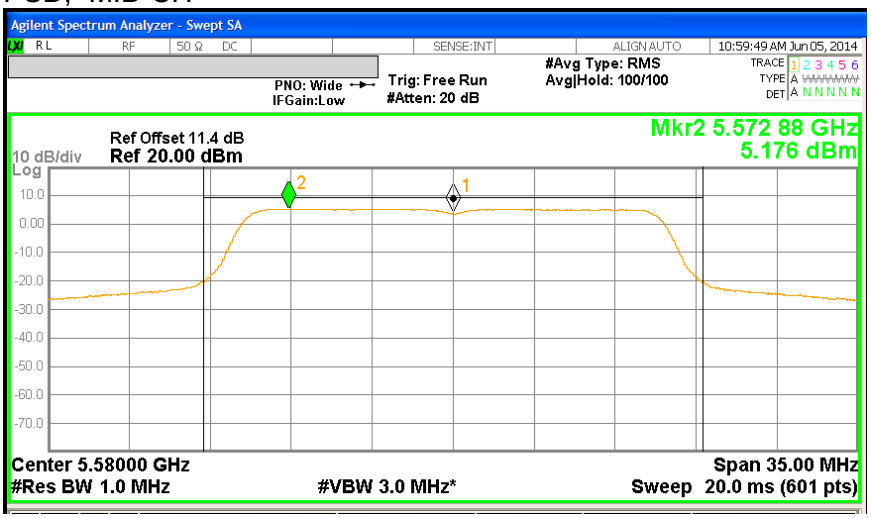

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

PSD, HIGH CH

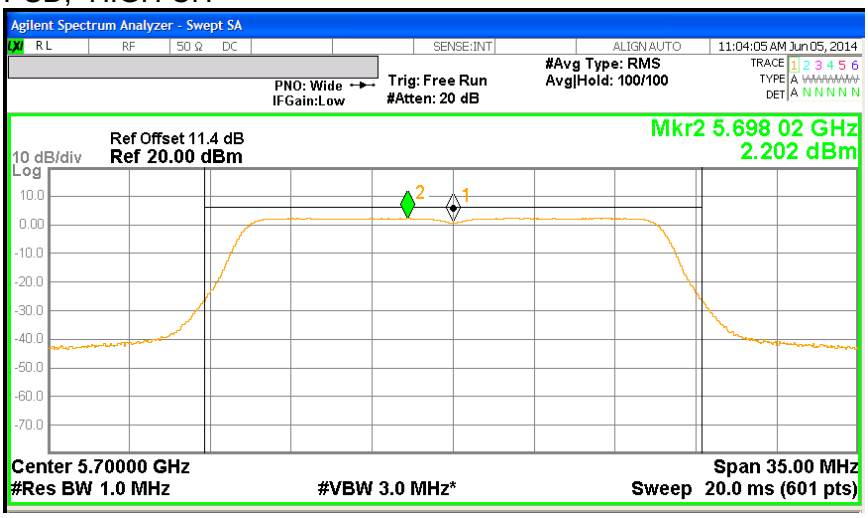

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.11. 802.11n HT20, MODE, CHANNEL 144, IN THE 5.6 GHz BAND

9.11.1. 26 dB BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
144	5720	21.60

BANDWIDTH 144 CH

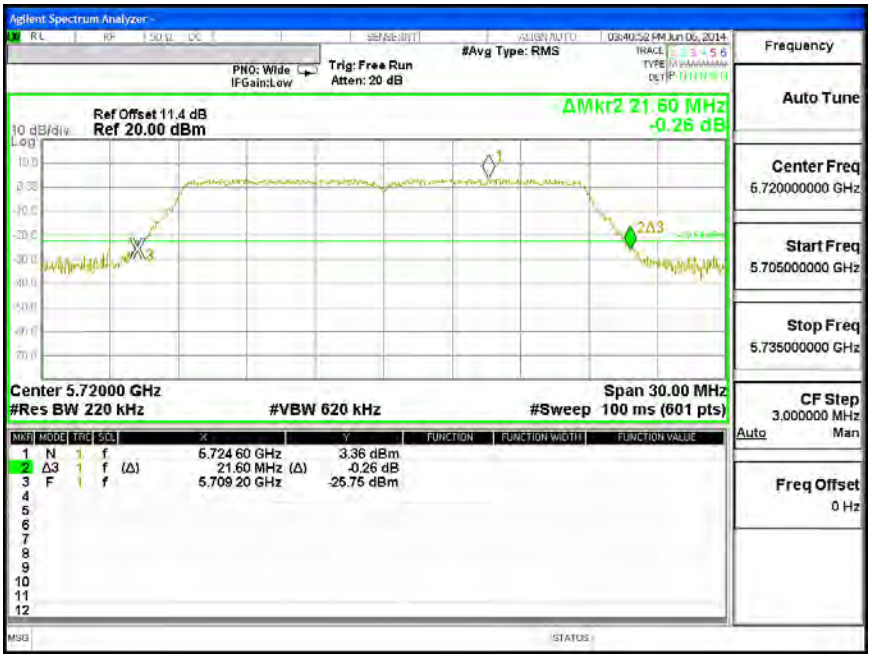

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.11.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
144	5720	17.719

99% BANDWIDTH

BANDWIDTH CH144

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.11.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter. The power meter was setup for a gated power measurement.

The cable assembly insertion loss of 11.2 dB (including 10 dB pad and 1.2 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

Channel	Frequency (MHz)	Power (dBm)
144	5720	15.98

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.11.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.5–5.7 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26–dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

IC RSS-210 A9.2 (1)

The maximum e.i.r.p. shall not exceed 200 mW or 10 + 10 log10 B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

Antenna Gain (dBi)
-0.44

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

RESULTS

STRADDLE CHANNEL 144 RESULTS

UNII-2C BAND

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
144	5720	21.60	-0.44	-0.44	24.00	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
144	5720	12.89	12.89	24.00	-11.11

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
144	5720	1.89	1.89	11.00	-9.11

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701J
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

OUTPUT POWER AND PSD, CH 144 UNII-2C

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

UNII-3 BAND

Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
144	5720	0.44	30.00	30.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
144	5720	7.43	7.43	30.00	-22.57

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
144	5720	1.65	1.65	30.00	-28.35

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

OUTPUT POWER, CH 144 UNII-3

PSD, CH 144 UNII-3

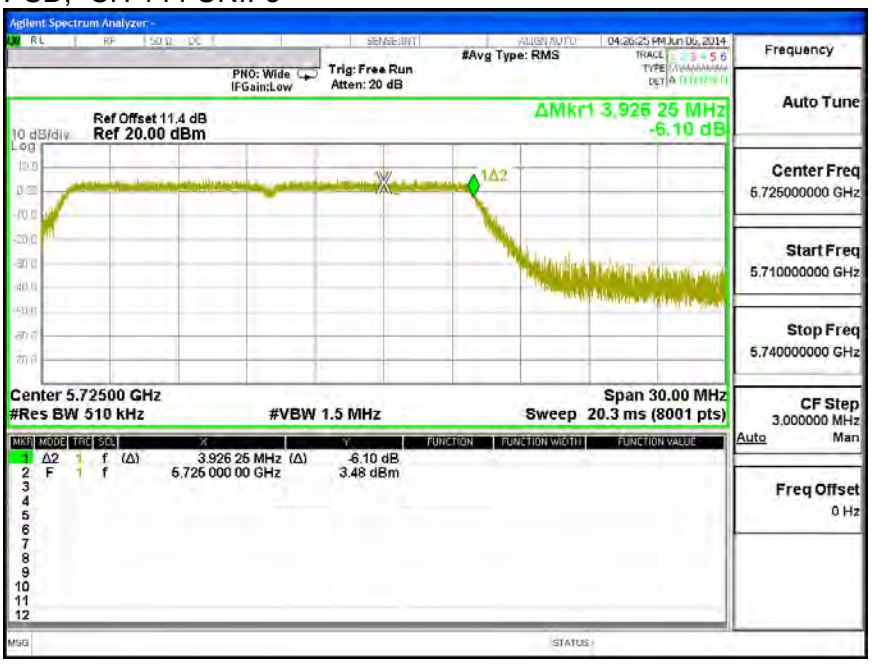

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.12. 802.11n HT40 MODE IN THE 5.6 GHz BAND

9.12.1. 26 dB BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5510	40.30
Mid	5550	40.41
High	5670	40.62

26 dB BANDWIDTH

BANDWIDTH LOW CH

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

26 dB BANDWIDTH

BANDWIDTH MID CH

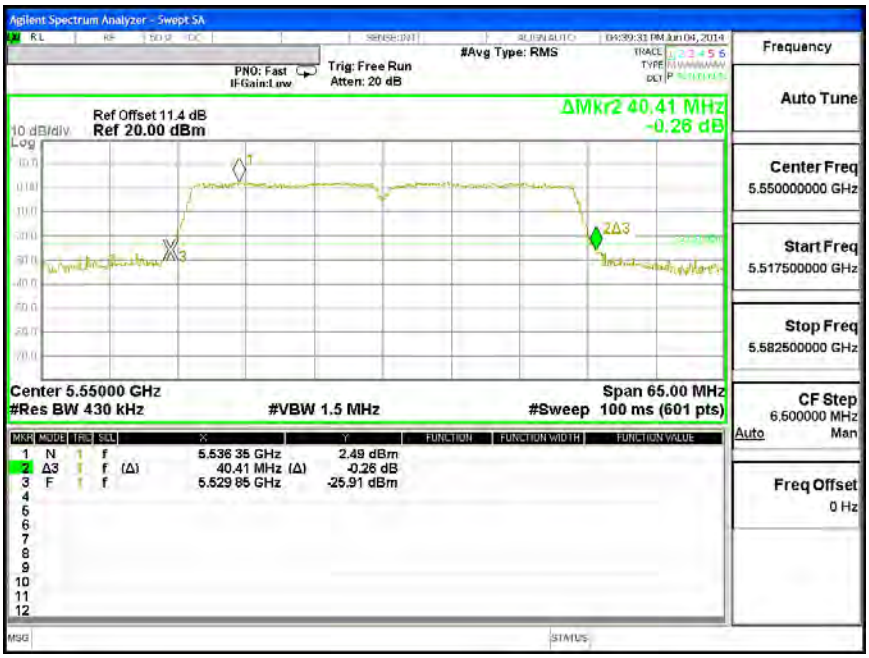

BANDWIDTH HIGH CH

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.12.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5510	36.184
Mid	5550	36.307
High	5670	36.161

99% BANDWIDTH

BANDWIDTH LOW CH

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

BANDWIDTH MID CH

BANDWIDTH HIGH CH

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.12.1. OUTPUT POWER

LIMITS

FCC §15.407 (a) (2)

For the band 5.5–5.7 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26–dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

The transmitter output is connected to a power meter. The power meter was setup for a gated power measurement.

The cable assembly insertion loss of 11.2 dB (including 10 dB pad and 1.2 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

Antenna Gain (dBi)
-0.44

RESULTS

Channel	Frequency (MHz)	Power (dBm)	Limit (dBm)	Margin (dBm)
Low	5510	14.91	24	-9.09
Mid	5550	16.92	24	-7.08
High	5670	16.98	24	-7.02

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.12.2. PSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.5–5.7 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26–dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

Antenna Gain (dBi)
-0.44

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

RESULTS

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)
Low	5510	40.30	36.184	-0.44
Mid	5550	40.41	36.307	-0.44
High	5670	40.62	36.161	-0.44

Duty Cycle CF (dB)	0.00	**Included in Calculations of Corr'd Power & PSD**

PPSD Results

Channel	Frequency (MHz)	Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5510	-1.646	-1.65	11.00	-12.65
Mid	5550	2.303	2.30	11.00	-8.70
High	5670	2.308	2.31	11.00	-8.69

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701J
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

PSD

PSD, LOW CH

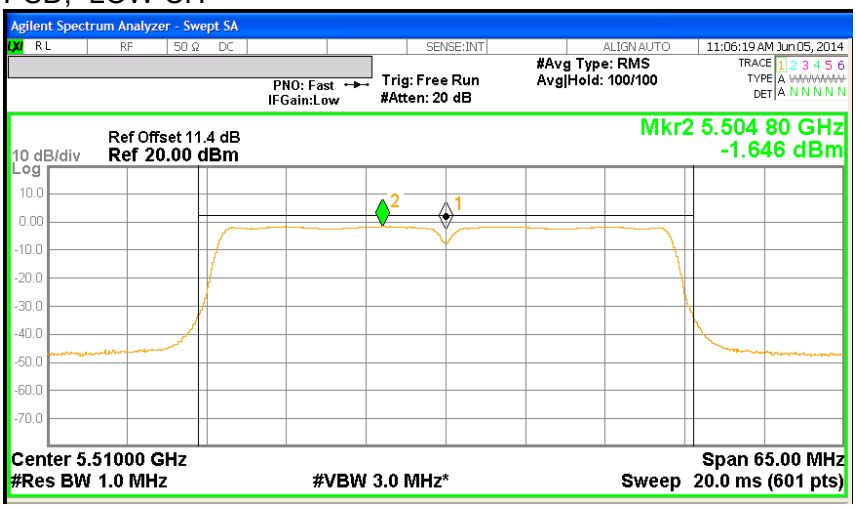

PSD, MID CH

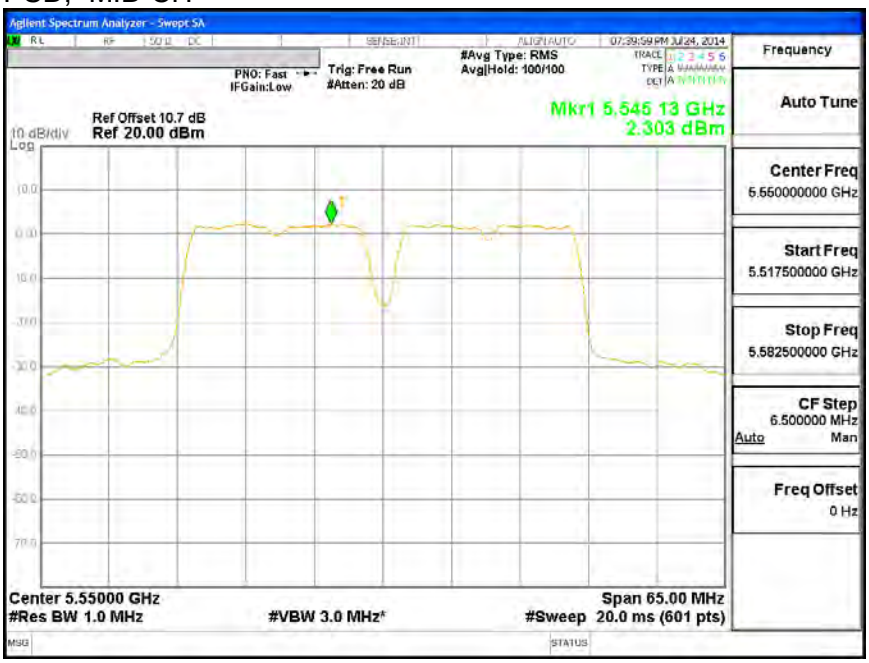

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

PSD, HIGH CH

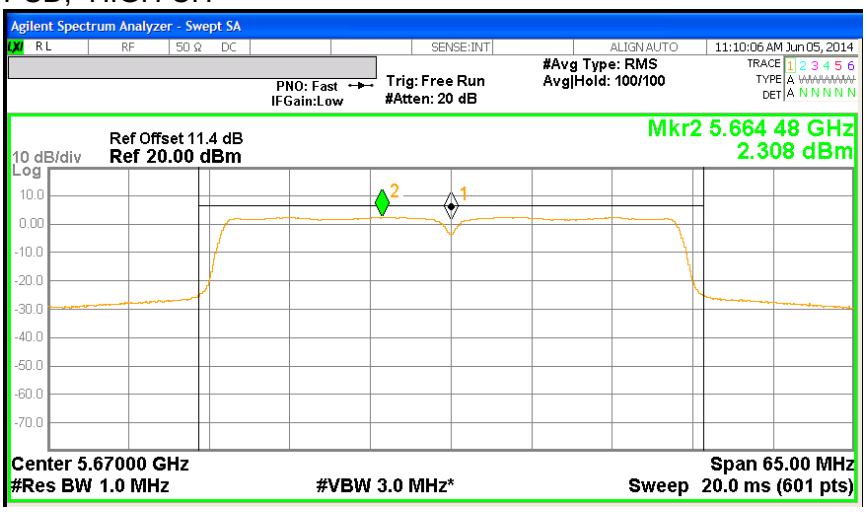

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.13. 802.11n HT40 MODE, CHANNEL 142, IN THE 5.6 GHz BAND

9.13.1. 26 dB BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
142	5710	40.08

BANDWIDTH CH142

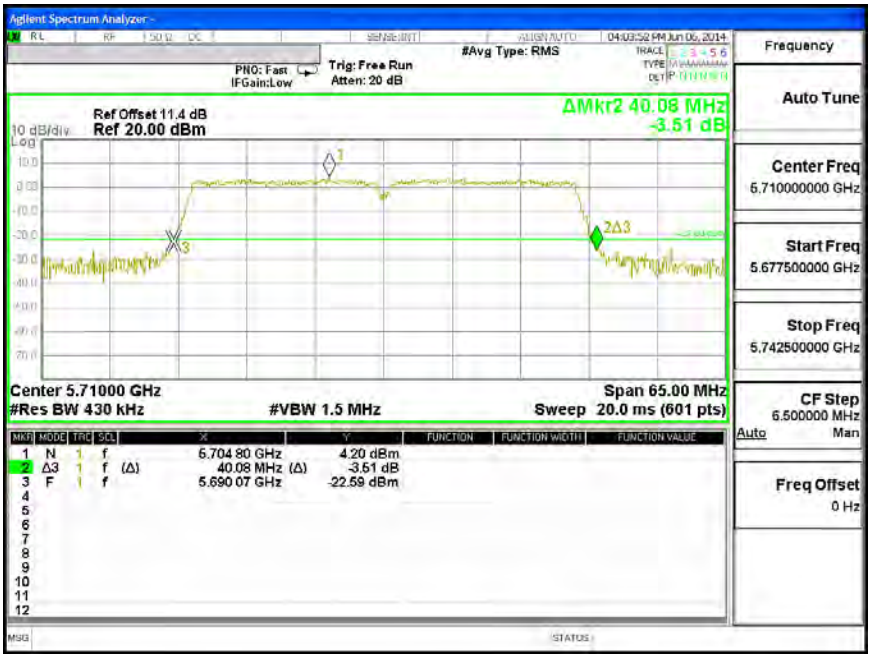

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.13.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
142	5710	36.240

99% BANDWIDTH

BANDWIDTH CH142

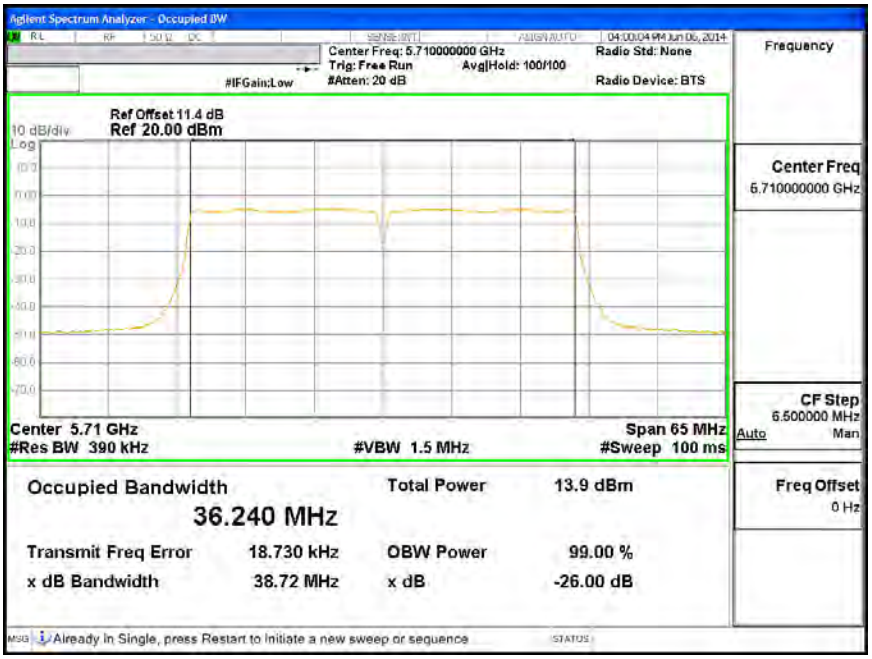

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.13.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter. The power meter was setup for a gated power measurement.

The cable assembly insertion loss of 11.2 dB (including 10 dB pad and 1.2 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

Channel	Frequency (MHz)	Power (dBm)
142	5710	14.95

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.13.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.5–5.7 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26–dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

Antenna Gain (dBi)
-0.44

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

RESULTS

STRADDLE CH 142 RESULTS

UNII-2C BAND

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
142	5710	40.08	-0.44	-0.44	24.00	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
142	5710	13.76	13.76	24.00	-10.24

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
142	5710	-0.58	-0.58	11.00	-11.58

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701J
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

OUTPUT POWER AND PSD, CH 142 UNII

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

UNII-3 BAND

Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
142	5710	-0.44	30.00	30.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
142	5710	3.52	3.52	30.00	-26.48

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
142	5710	-1.22	-1.22	30.00	-31.22

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

OUTPUT POWER, CH 142 UNII-3

PSD, CH 142 UNII-3

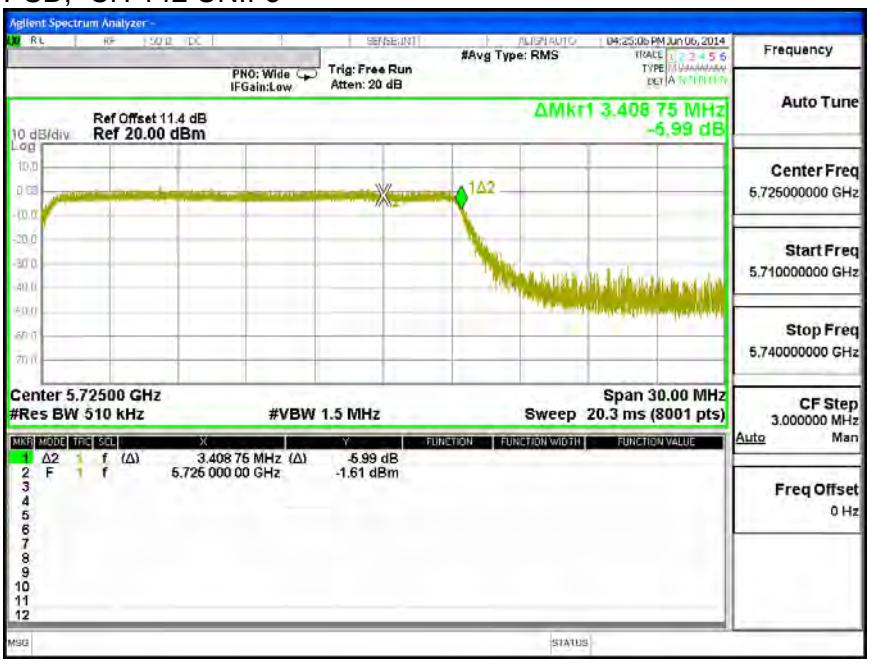

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.14. 802.11ac 80MHz MODE IN THE 5.6 GHz BAND

9.14.1. 26 dB BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
106	5530	83.12

26 dB BANDWIDTH

BANDWIDTH CH 106

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.14.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
106	5530	75.332

99% BANDWIDTH

99% BANDWIDTH, CH 106

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.14.3. OUTPUT POWER

LIMITS

FCC §15.407 (a) (2)

For the band 5.5–5.7 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26–dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

The transmitter output is connected to a power meter. The power meter was setup for a gated power measurement.

The cable assembly insertion loss of 11.38 dB (including 10 dB pad and 1.2dB cable and 0.18dB duty cycle correction factor) was entered as an offset in the power meter to allow for direct reading of power.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

Antenna Gain (dBi)
-0.44

RESULTS

Channel	Frequency (MHz)	Power (dBm)	Limit (dBm)	Margin (dBm)
106	5530	12.98	24	-11.02

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.14.4. PSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.5–5.7 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26–dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

Antenna Gain (dBi)
-0.44

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

RESULTS

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)
106	5530	83.12	75.332	-0.44

Duty Cycle CF (dB)	0.18	Included in Calculations of Corr'd Power & PSD

PPSD Results

Channel	Frequency (MHz)	Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
106	5530	-4.807	-4.63	11.00	-15.63

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701J
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

PSD

PSD CH 106

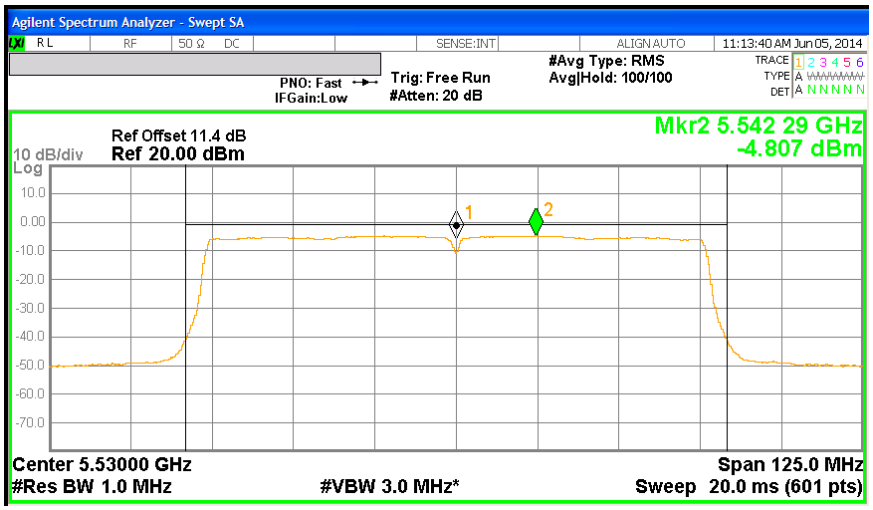

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.15. 802.11ac 80MHz MODE, CHANNEL 138, 5.6 GHz BAND

9.15.1. 26 dB BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Frequency (MHz)	26 dB Bandwidth (MHz)
5690	83.13

26 dB BANDWIDTH

BANDWIDTH CH 138

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.15.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Frequency (MHz)	99% Bandwidth (MHz)
5690	75.662

99% BANDWIDTH

BANDWIDTH CH 138

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.15.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter. The power meter was setup for a gated power measurement.

The cable assembly insertion loss of 11.2 dB (including 10 dB pad and 1.2 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

Channel	Frequency (MHz)	Power (dBm)
Mid	5690	12.92

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.15.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.5–5.7 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26–dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

Antenna Gain (dBi)
-0.44

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

RESULTS

Limits (FCC), portion in UNII 2 ext band

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)
138	5690	76.57	72.831	-0.44

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm)	IC PSD Limit (dBm)	PSD Limit (dBm)
138	5690	24.00	24.00	30.00	24.00	11.00	11.00	11.00

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
138	5690	12.86	13.04	24.00	-10.96

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
138	5690	-4.49	-4.31	11.00	-15.31

Duty Cycle CF (dB)	0.18	**Included in Calculations of Corr'd Power & PPSD**

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Limits (FCC), portion in DTS 2 ext band

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)
138	5690	76.57	72.831	-0.44

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm)	IC PSD Limit (dBm)	PSD Limit (dBm)
138	5690	24.00	24.00	30.00	24.00	11.00	11.00	11.00

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
138	5690	-1.34	0.18	24.00	-23.82

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
138	5690	-5.629	-5.45	11.00	-16.45

Duty Cycle CF (dB)	0.18	**Included in Calculations of Corr'd Power & PPSD**

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701J
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

OUTPUT POWER AND PSD,

OUTPUT POWER AND PSD, CH 138 UNII

OUTPUT POWER AND PSD, CH 138 DTS

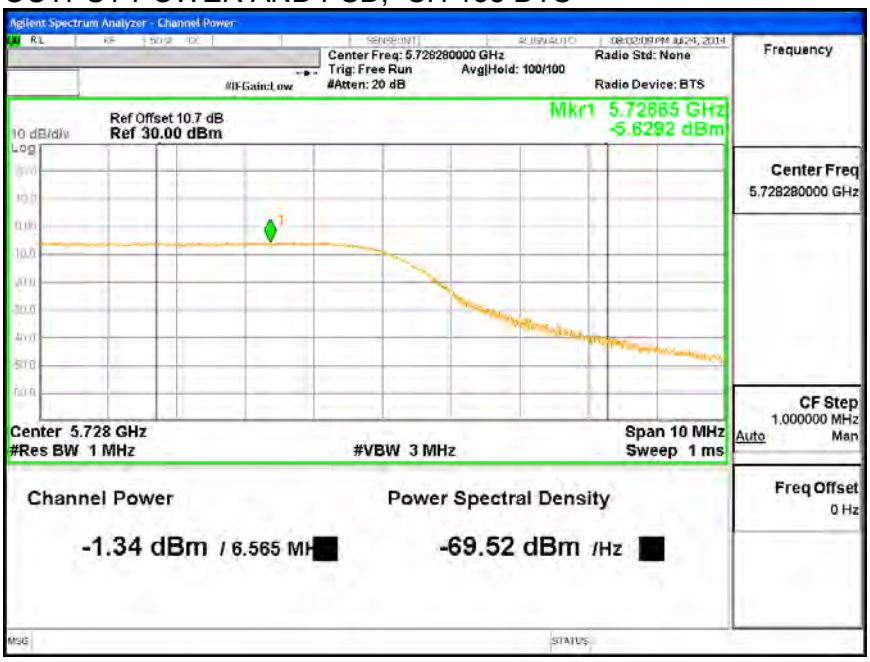

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

OUTPUT POWER AND PSD, CH 138 DTS

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.16. 802.11a MODE IN THE 5.8 GHz BAND

9.16.1. 6 dB BANDWIDTH

LIMITS

FCC §15.407 (e)

The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	5745	16.50	0.5
Mid	5785	16.58	0.5
High	5825	16.50	0.5

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

6 dB BANDWIDTH

6 dB BANDWIDTH LOW CH

6 dB BANDWIDTH MID CH

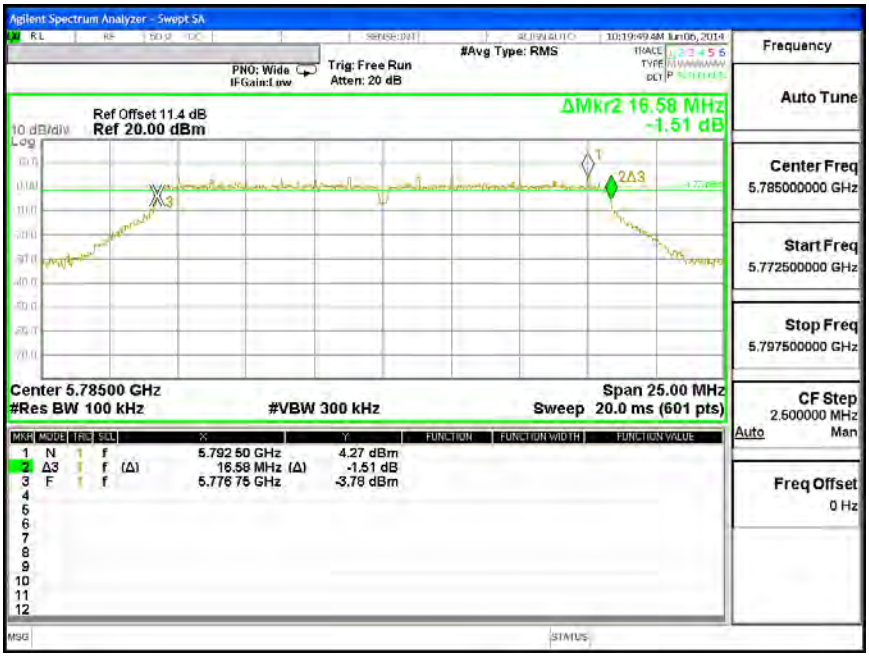

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

6 dB BANDWIDTH HIGH CH

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.16.2. 26 dB BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5745	21.00
Mid	5785	21.29
High	5825	21.23

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

26 dB BANDWIDTH

BANDWIDTH LOW CH

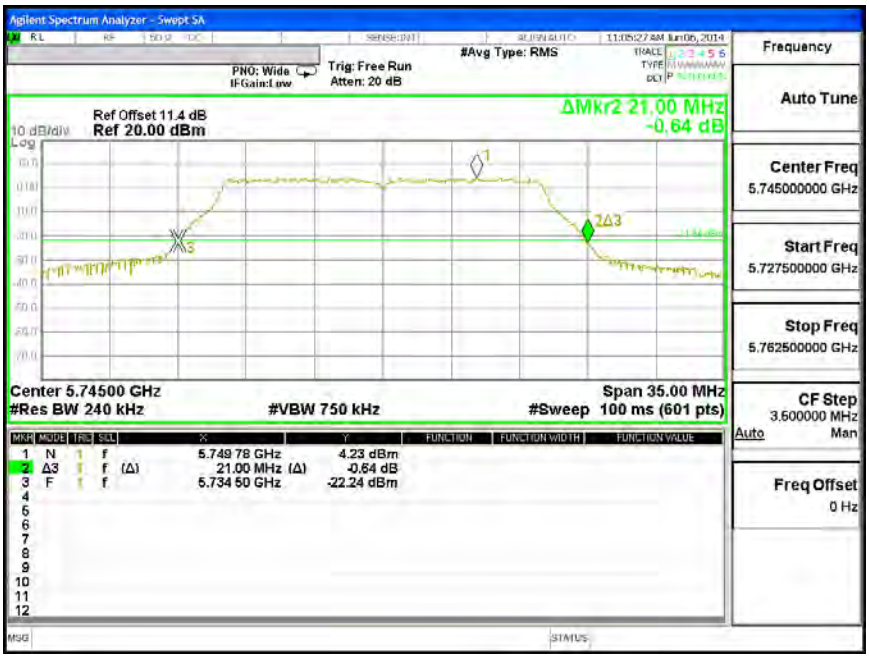

BANDWIDTH MID CH

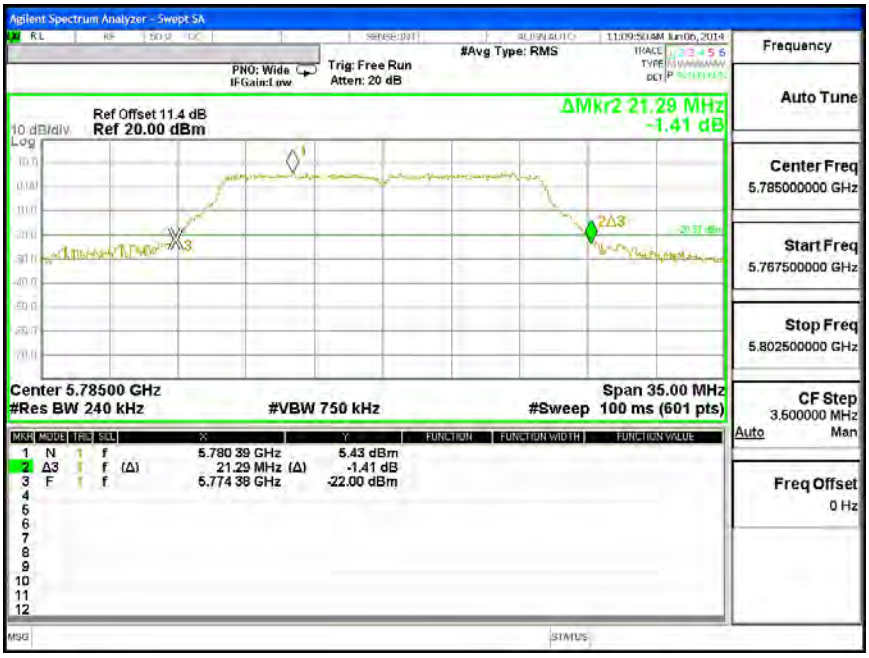

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

BANDWIDTH HIGH CH

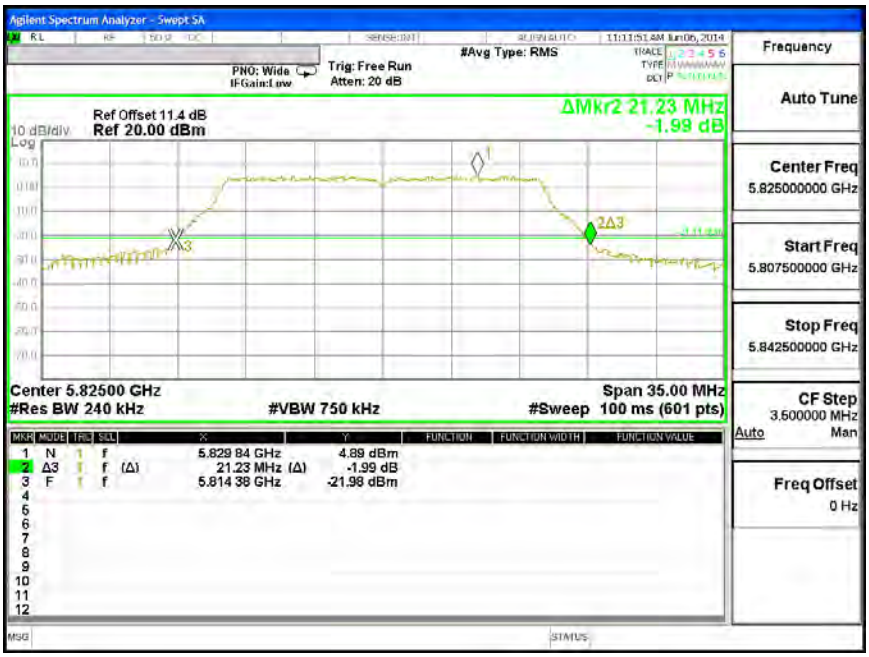

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.16.3. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5745	16.418
Mid	5785	16.528
High	5825	16.517

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

99% BANDWIDTH

99% BANDWIDTH LOW CH

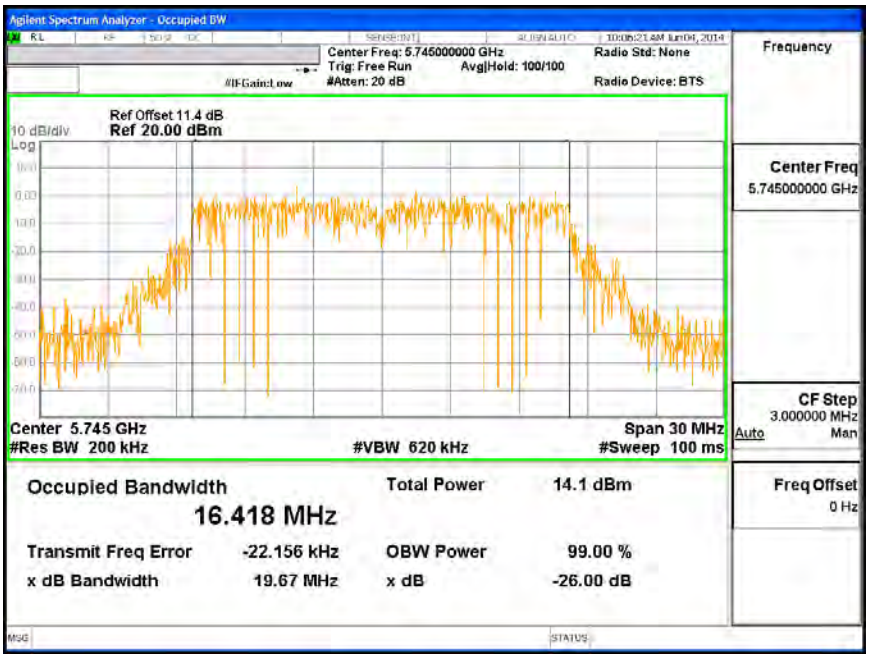

99% BANDWIDTH MID CH

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

99% BANDWIDTH HIGH CH

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.16.4. OUTPUT POWER

LIMITS

FCC §15.407 (a) (3)

For the band 5.725-5.825 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 1 W or 30 dBm. In addition, the peak power spectral density shall not exceed 30 dBm in any 500kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

The transmitter output is connected to a power meter. The power meter was setup for a gated power measurement.

The cable assembly insertion loss of 11.2 dB (including 10 dB pad and 1.2 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

Antenna Gain (dBi)
-0.87

RESULTS

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5745	15.930	15.93	30.00	-14.07
Mid	5785	16.830	16.83	30.00	-13.17
High	5825	16.820	16.82	30.00	-13.18

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.16.5. PSD

LIMITS

FCC §15.407 (a) (3)

For the band 5.725-5.825 GHz, the peak power spectral density shall not exceed 30 dBm in any 500kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

RESULTS

PSD Results

Channel	Frequency (MHz)	Meas (dBm)	Limit (dBm)	Margin (dB)
Low	5745	0.73	30.0	-29.3
Mid	5785	2.32	30.0	-27.7
High	5825	1.62	30.0	-28.4

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

PSD,

PSD, LOW CH

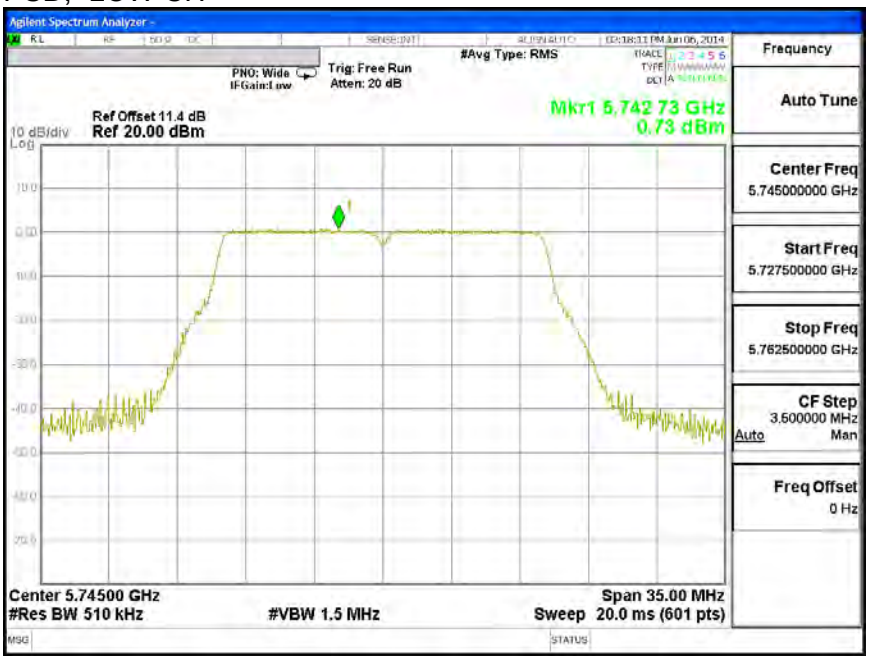

PSD, MID CH

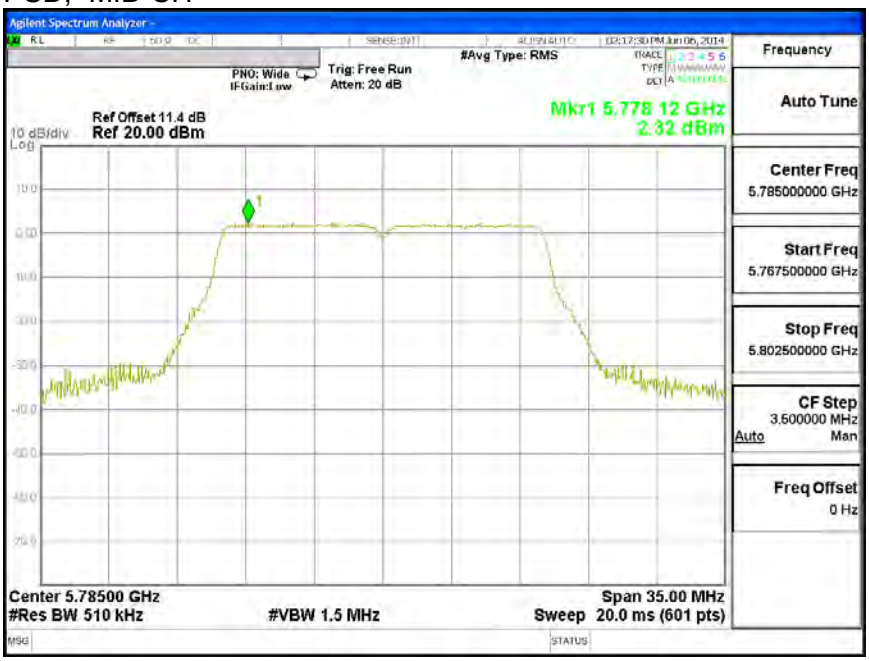

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

PSD, HIGH CH

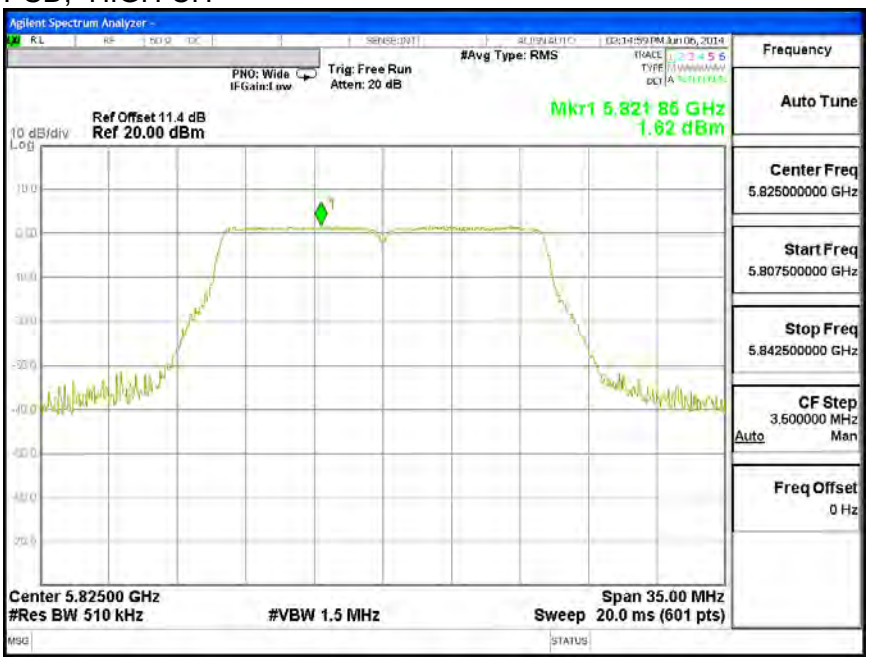

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.17. 802.11n HT20 MODE IN THE 5.8 GHz BAND

9.17.1. 6 dB BANDWIDTH

LIMITS

FCC §15.407 (e)

The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	5745	17.70	0.5
Mid	5785	17.65	0.5
High	5825	17.70	0.5

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

6 dB BANDWIDTH

6 dB BANDWIDTH LOW CH

6 dB BANDWIDTH MID CH

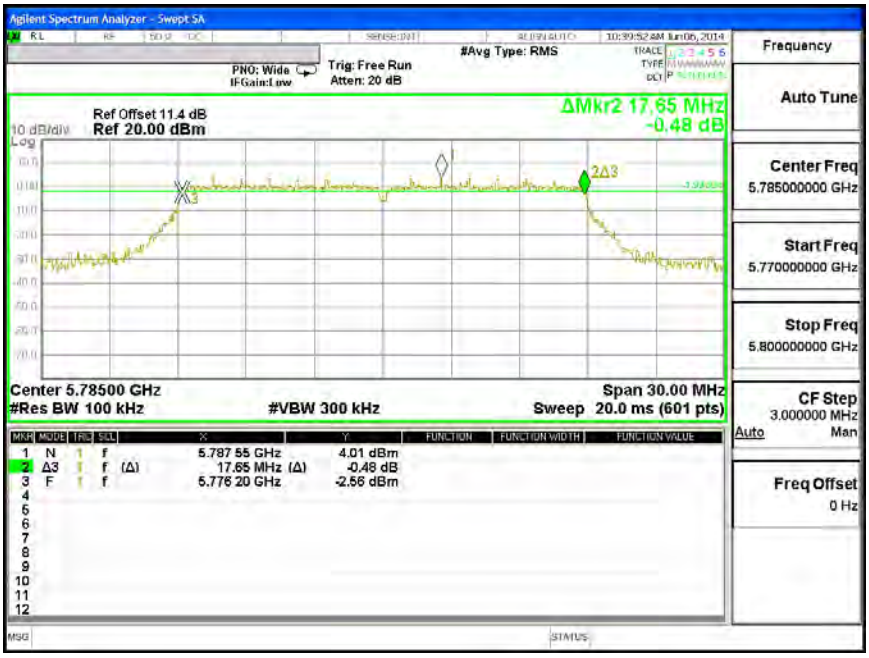

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

6 dB BANDWIDTH HIGH CH

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.17.2. 26 dB BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5745	21.87
Mid	5785	21.53
High	5825	21.76

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

26 dB BANDWIDTH

BANDWIDTH LOW CH

BANDWIDTH MID CH

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

BANDWIDTH HIGH CH

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.17.3. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5745	17.768
Mid	5785	17.786
High	5825	17.796

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

99% BANDWIDTH

99% BANDWIDTH LOW CH

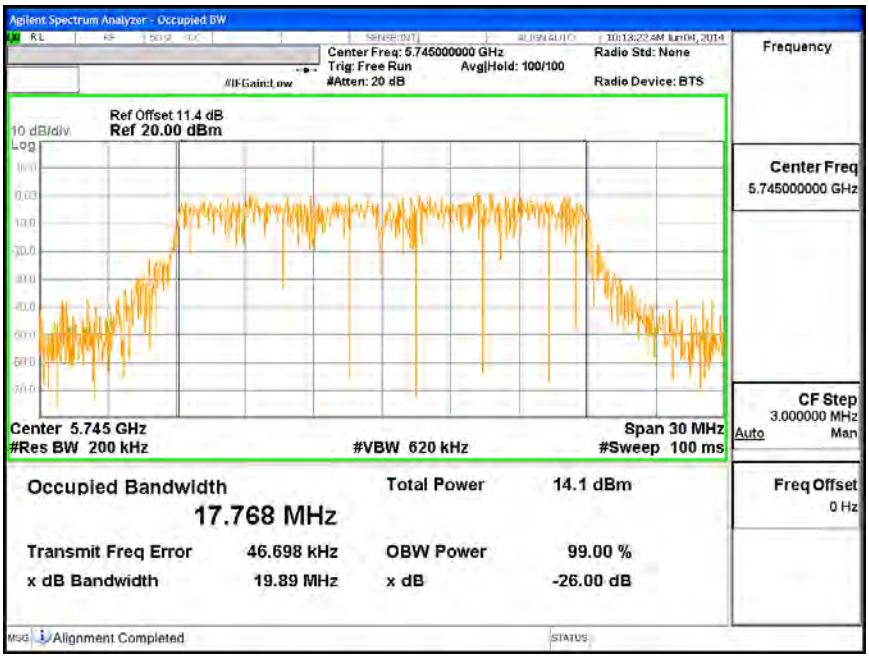

99% BANDWIDTH MID CH

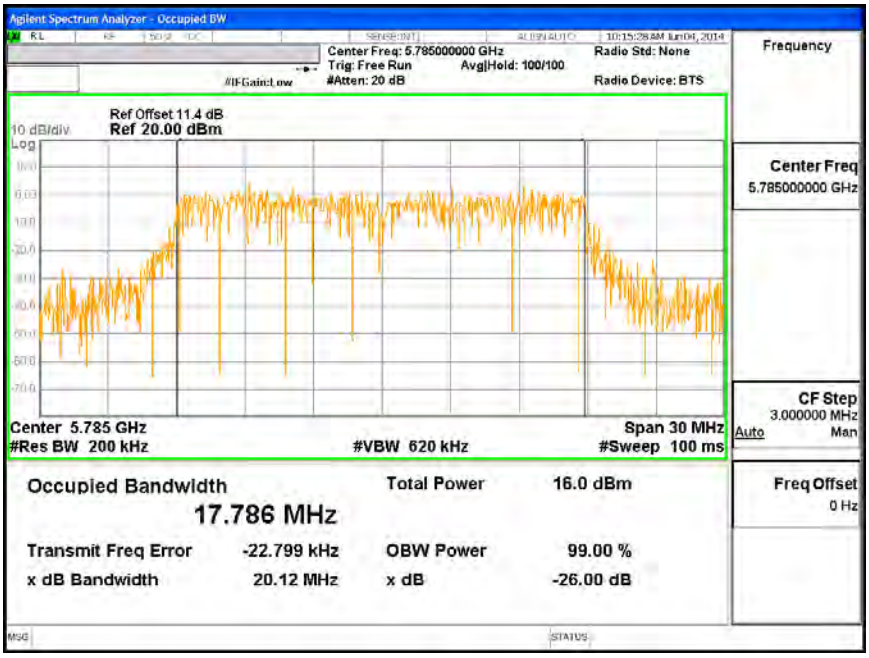

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

99% BANDWIDTH HIGH CH

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.17.4. OUTPUT POWER

LIMITS

FCC §15.407 (a) (3)

For the band 5.725-5.825 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of a1 W or 30 dBm. In addition, the peak power spectral density shall not exceed 30 dBm in any 500kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

The transmitter output is connected to a power meter. The power meter was setup for a gated power measurement.

The cable assembly insertion loss of 11.2 dB (including 10 dB pad and 1.2 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

Antenna Gain (dBi)
-0.87

RESULTS

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5745	15.920	15.92	30.00	-14.08
Mid	5785	16.890	16.89	30.00	-13.11
High	5825	16.930	16.93	30.00	-13.07

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.17.5. PSD

LIMITS

FCC §15.407 (a) (3)

For the band 5.725-5.825 GHz, the peak power spectral density shall not exceed 30 dBm in any 500kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

RESULTS

PSD Results

Channel	Frequency (MHz)	Meas (dBm)	Limit (dBm)	Margin (dB)
Low	5745	0.85	30.0	-29.2
Mid	5785	2.95	30.0	-27.1
High	5825	2.18	30.0	-27.8

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701J
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

PSD

PSD, LOW CH

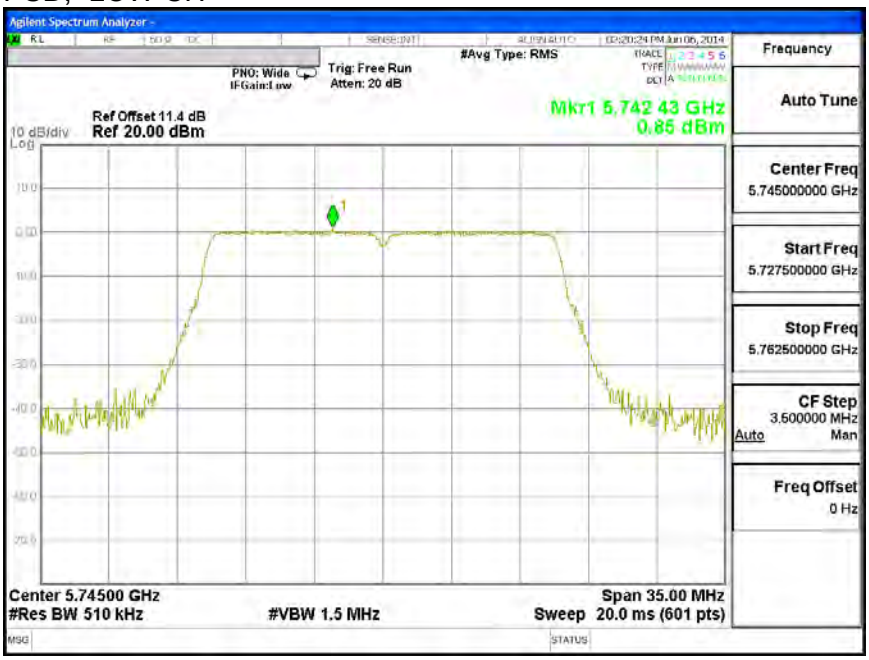

PSD, MID CH

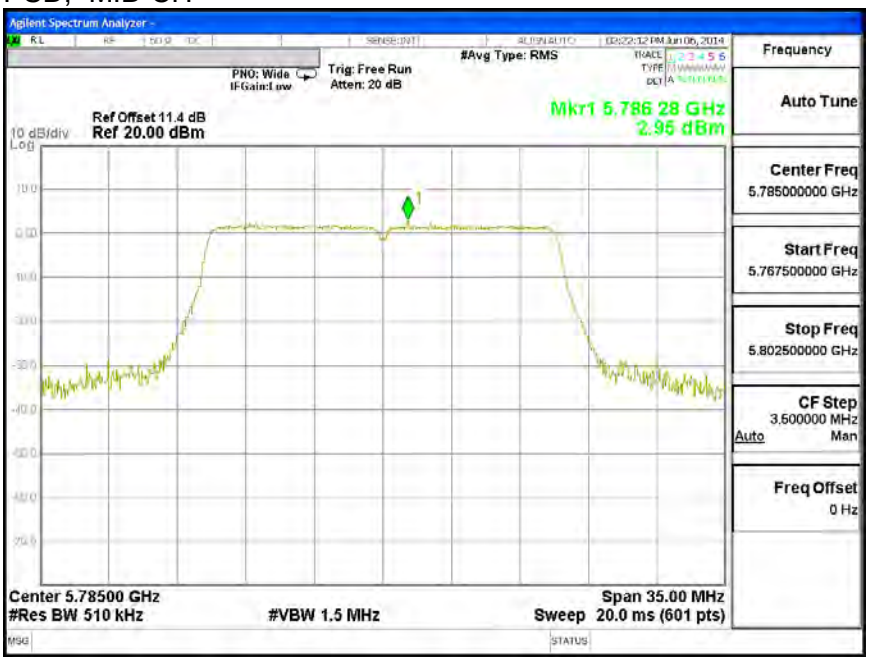

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

PSD, HIGH CH

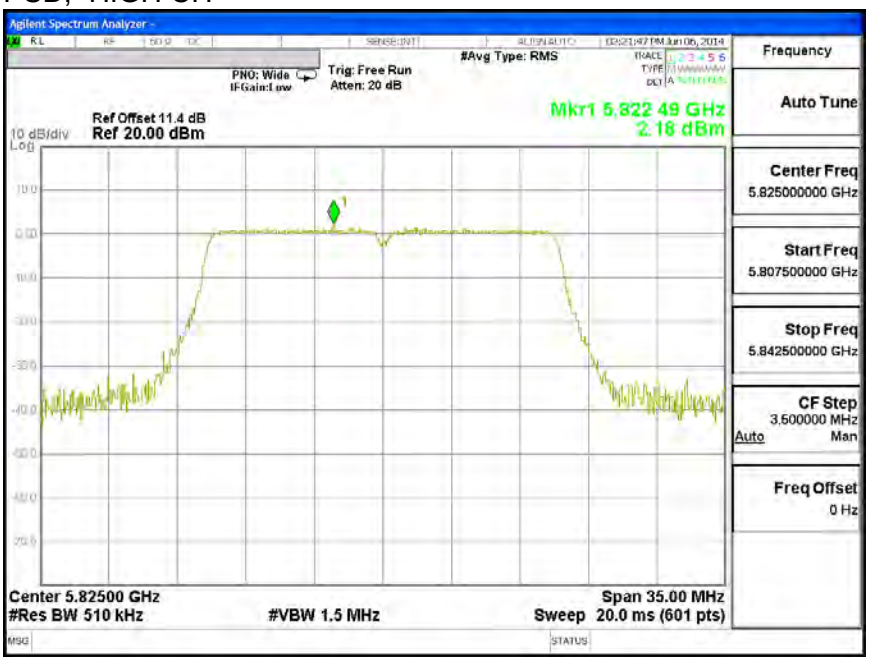

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.18. 802.11n HT40 MODE IN THE 5.8 GHz BAND

9.18.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)

The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	5755	36.57	0.5
High	5795	36.58	0.5

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

6 dB BANDWIDTH

6 dB BANDWIDTH LOW CH

6 dB BANDWIDTH HIGH CH

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.18.2. 26 dB BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5755	40.41
High	5795	40.30

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

26 dB BANDWIDTH

BANDWIDTH LOW CH

BANDWIDTH HIGH CH

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.18.3. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5755	36.134
High	5795	36.302

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

99% BANDWIDTH

99% BANDWIDTH LOW CH

99% BANDWIDTH HIGH CH

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.18.4. OUTPUT POWER

LIMITS

FCC §15.407 (a) (3)

For the band 5.725–5.825 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 1 W or 30 dBm. In addition, the peak power spectral density shall not exceed 30 dBm in any 500kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

The transmitter output is connected to a power meter. The power meter was setup for a gated power measurement.

The cable assembly insertion loss of 11.2 dB (including 10 dB pad and 1.2 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

Antenna Gain (dBi)
-0.87

RESULTS

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5755	14.370	14.37	30.00	-15.63
High	5795	16.930	16.93	30.00	-13.07

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701J
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.18.5. PSD

LIMITS

FCC §15.407 (a) (3)

For the band 5.725-5.825 GHz, the peak power spectral density shall not exceed 30 dBm in any 500kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

RESULTS

PSD Results

Channel	Frequency (MHz)	Meas (dBm)	Limit (dBm)	Margin (dB)
Low	5755	-0.94	8.0	-8.9
High	5795	-0.77	8.0	-8.8

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

PSD,

PSD, LOW CH

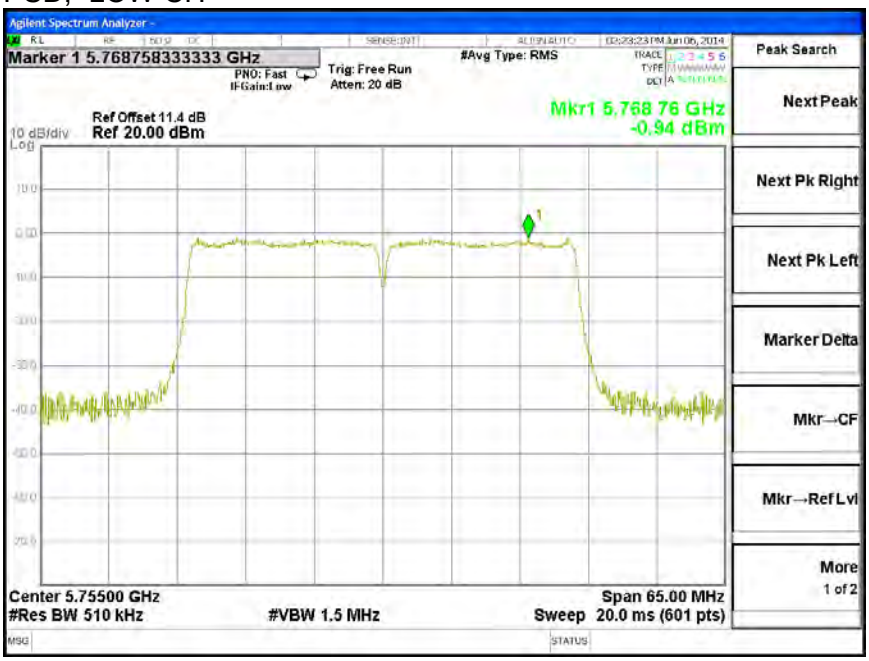

PSD, HIGH CH

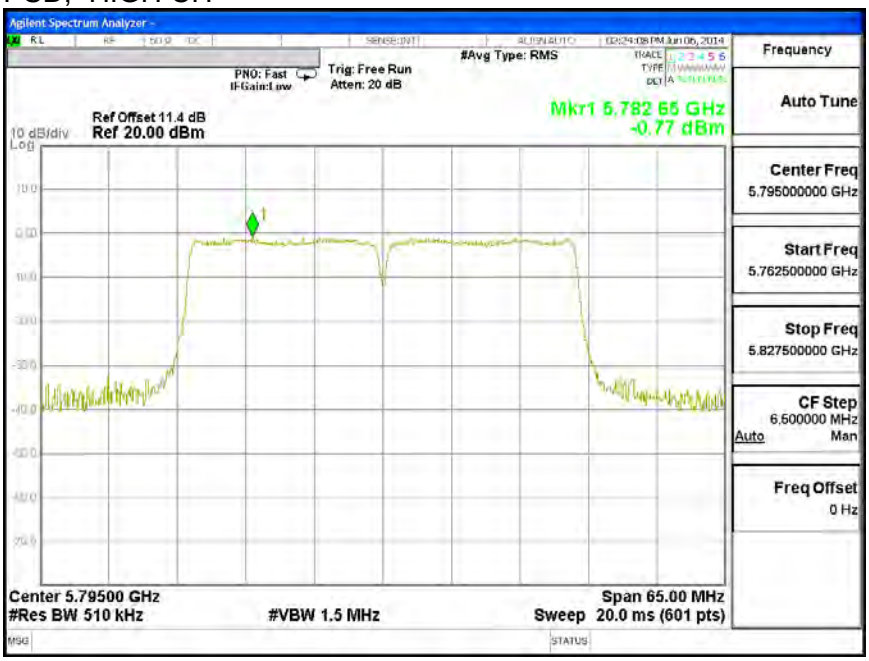

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.19. 802.11ac 80 MODE IN THE 5.8 GHz BAND

9.19.1. 6 dB BANDWIDTH

LIMITS

FCC §15.407 (e)

The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
155	5775	77.00	0.5

6 dB BANDWIDTH

6 dB BANDWIDTH CH 155

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.19.2. 26 dB BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5775	82.92

26 dB BANDWIDTH

BANDWIDTH LOW CH

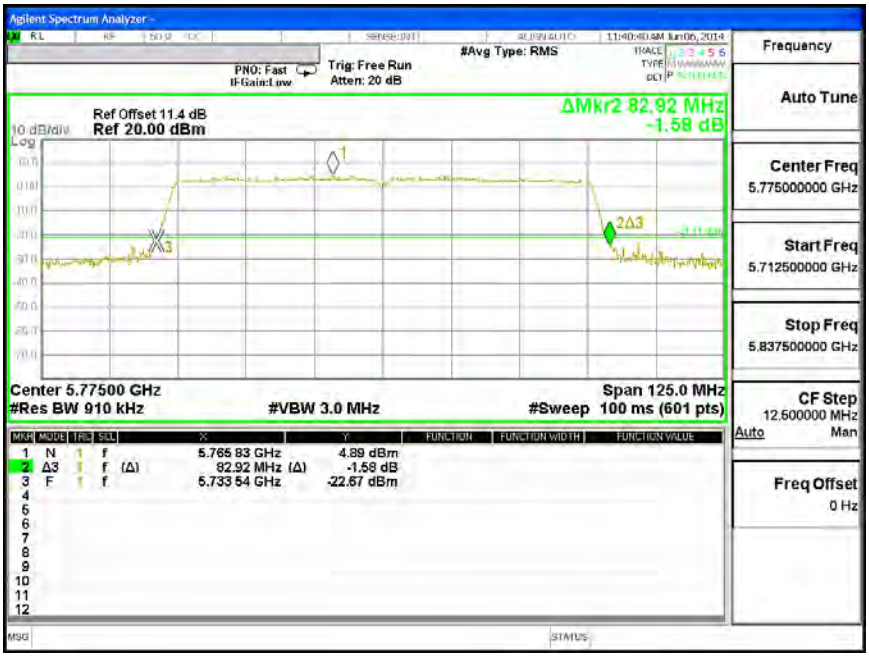

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.19.3. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
155	5775	75.782

99% BANDWIDTH

99% BANDWIDTH CH 155

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.19.4. OUTPUT POWER

LIMITS

FCC §15.407 (a) (3)

For the band 5.725–5.825 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 1 W or 30 dBm. In addition, the peak power spectral density shall not exceed 30 dBm in any 500kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

The transmitter output is connected to a power meter. The power meter was setup for a gated power measurement.

The cable assembly insertion loss of 11.38 dB (including 10 dB pad 1.2dB cable and 0.18dB duty cycle correction factor) was entered as an offset in the power meter to allow for direct reading of power.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

Antenna Gain (dBi)
-0.87

RESULTS

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5775	12.890	13.07	30.00	-16.93

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.19.5. PSD

LIMITS

FCC §15.407 (a) (3)

For the band 5.725-5.825 GHz, the peak power spectral density shall not exceed 30 dBm in any 500kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

RESULTS

PSD Results

Channel	Frequency (MHz)	Meas (dBm)	Limit (dBm)	Margin (dB)
155	5775	-4.91	30.0	-34.9

PSD

PSD, CH 155

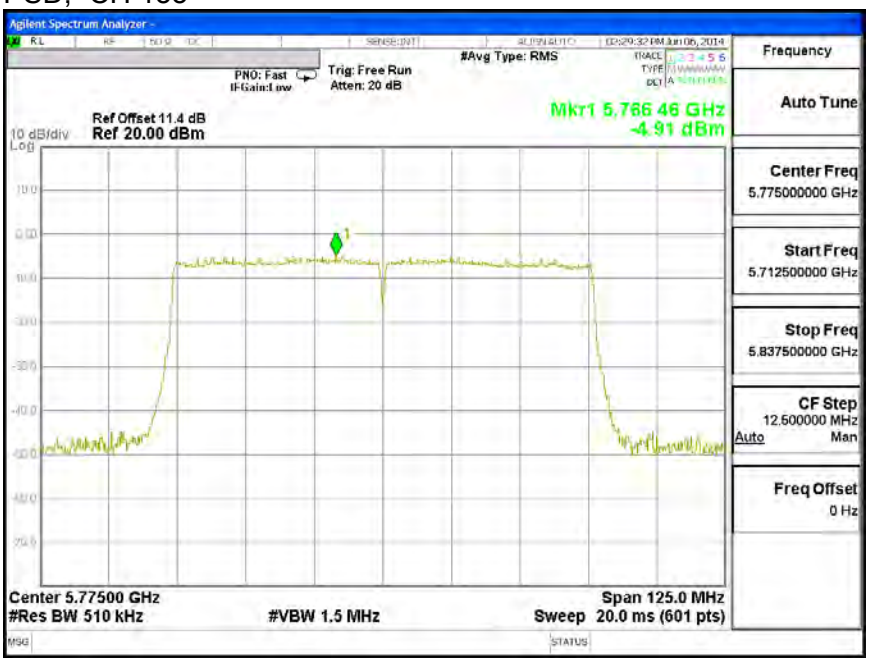

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

10. RADIATED TEST RESULTS

10.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements and as applicable for average measurements.

The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each applicable band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

10.2. TRANSMITTER ABOVE 1 GHz

10.2.1. TX ABOVE 1 GHz 802.11a MODE IN THE 5.2 GHz BAND

RESTRICTED BANDEDGE (LOW CHANNEL)

LOW CHANNEL RESTRICTED, PEAK, HORIZ

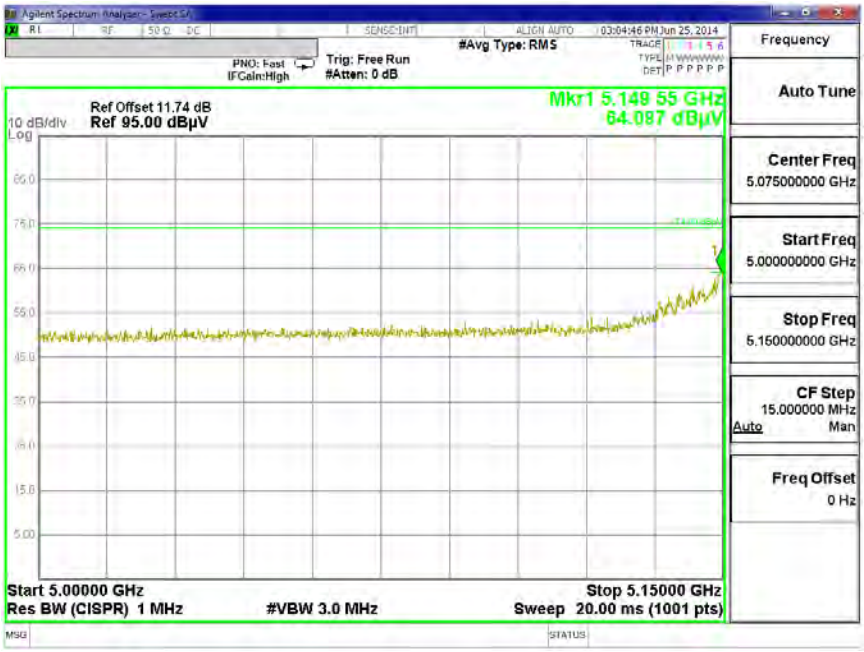

LOW CHANNEL RESTRICTED, AVERAGE, HORIZ

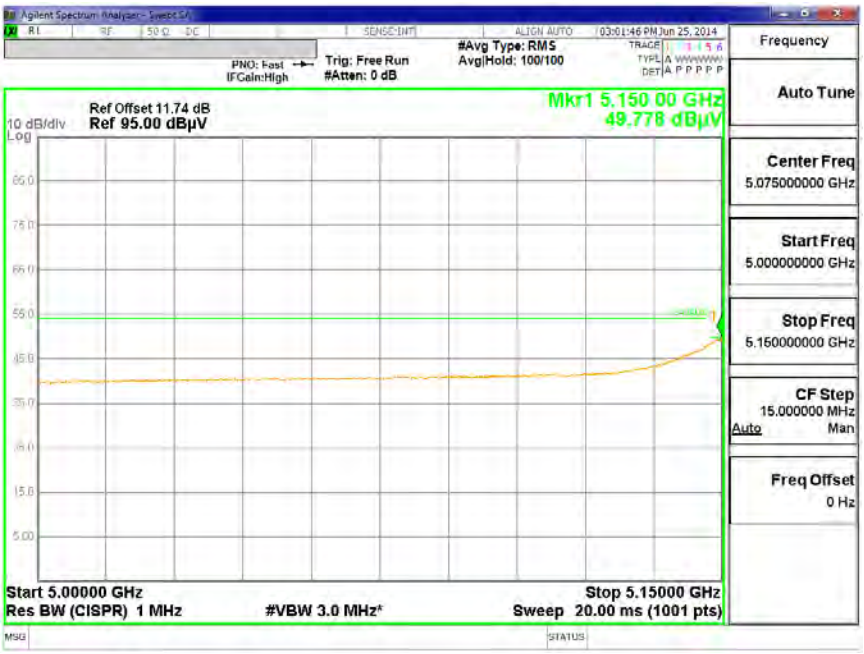

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

LOW CHANNEL RESTRICTED, PEAK, VERT

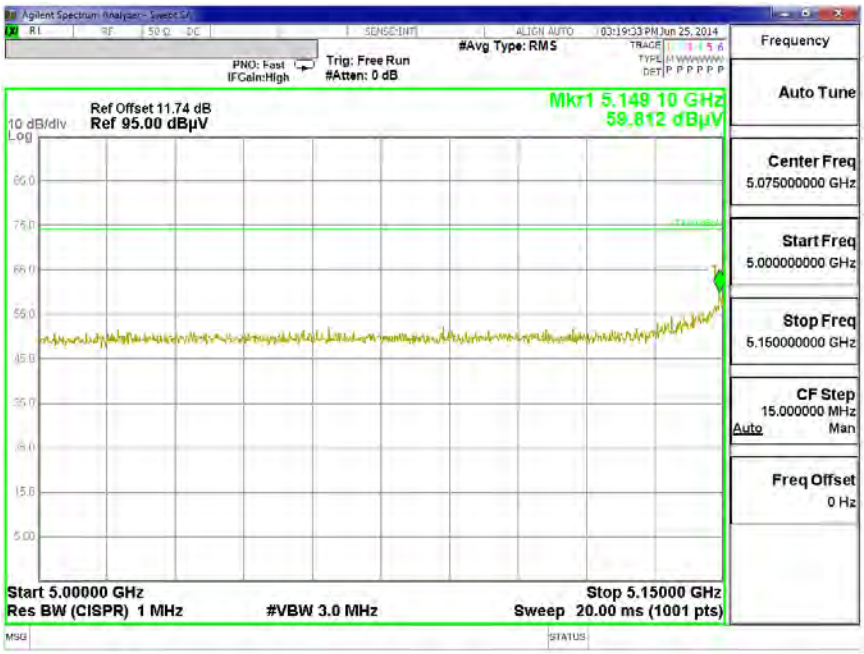

LOW CHANNEL RESTRICTED, AVERAGE, VERT

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL HORIZONTAL PLOT, CH 36

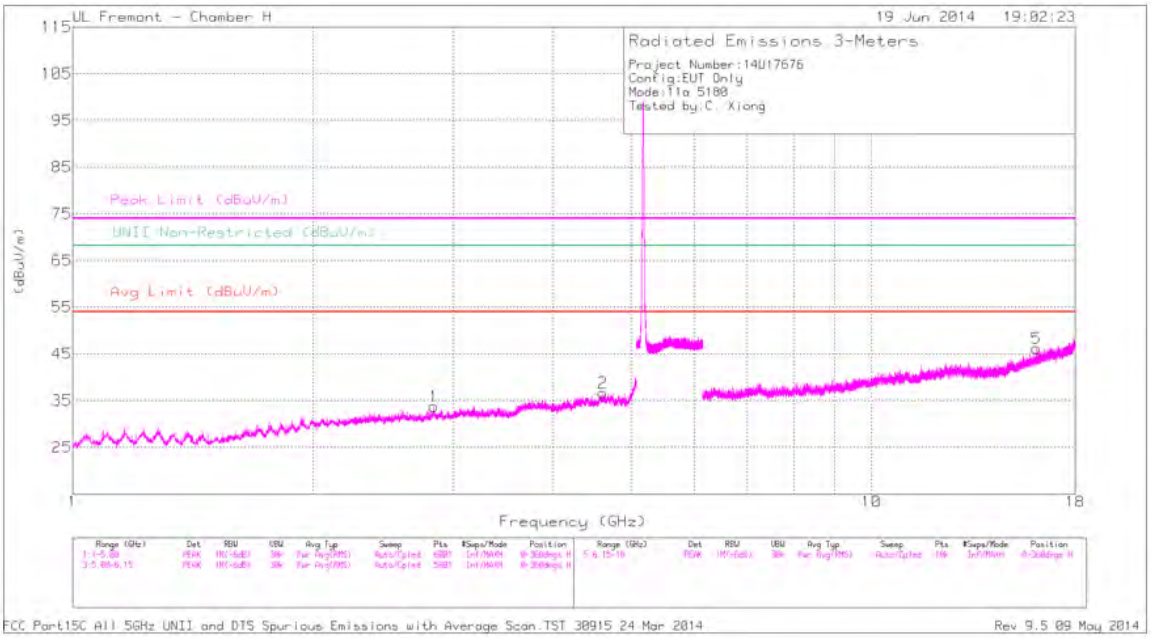

LOW CHANNEL VERTICAL PLOT, CH 36

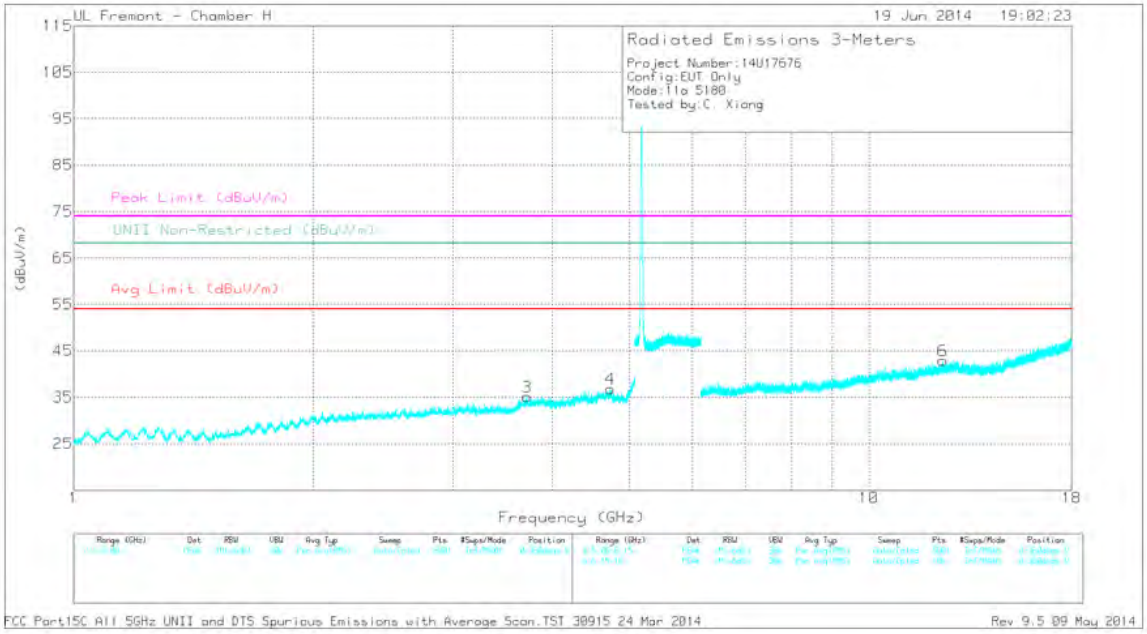

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.828	41.84	PK1	32.5	-33	0	41.34	-	-	74	-32.66	-	-	250	203	H
	* 2.834	30.52	AD1	32.5	-33	.1	30.12	54	-23.88	-	-	-	-	250	203	H
2	* 4.615	41.69	PK1	34.1	-31.8	0	43.99	-	-	74	-30.01	-	-	189	218	H
	* 4.61	30.74	AD1	34.1	-31.7	.1	33.24	54	-20.76	-	-	-	-	189	218	H
3	* 3.72	41.84	PK1	33.2	-32.7	0	42.34	-	-	74	-31.66	-	-	68	145	V
	* 3.724	31.1	AD1	33.2	-32.8	.1	31.6	54	-22.4	-	-	-	-	68	145	V
4	* 4.735	41.03	PK1	34.3	-31.5	0	43.83	-	-	74	-30.17	-	-	332	249	V
	* 4.734	30.18	AD1	34.3	-31.5	.1	33.08	54	-20.92	-	-	-	-	332	249	V
5	* 16.083	35.73	PK1	41.2	-24.1	0	52.83	-	-	74	-21.17	-	-	313	154	H
	* 16.078	24.94	AD1	41.2	-24.1	.1	42.14	54	-11.86	-	-	-	-	313	154	H
6	* 12.399	36.56	PK1	39.1	-25.1	0	50.56	-	-	74	-23.44	-	-	34	185	V
	* 12.394	25.82	AD1	39.1	-25.2	.1	39.82	54	-14.18	-	-	-	-	34	185	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band
PK1 - KDB789033 Method: Peak
AD1 - KDB789033 Method: AD Primary Power Average

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.