



FCC 47 CFR PART 15 SUBPART E
CERTIFICATION TEST REPORT
FOR
CELLULAR PHONE WITH BLUETOOTH AND WLAN RADIOS

MODEL NUMBER: A1662

FCC ID: BCG-E2945A

REPORT NUMBER: 15U21634-E5V4

ISSUE DATE: FEBRUARY 04, 2016

Prepared for
APPLE, INC.
1 INFINITE LOOP
CUPERTINO, CA 95014, U.S.A.

Prepared by
UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888



NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
V1	01/22/2016	Initial Issue	M. Mekuria
V2	01/28/2016	Revised report to address TCB's questions	T. Chu
V3	01/29/2016	Revised all the output power and PSD sections to address TCB's question	T. Chu
V4	02/04/2016	Revised Section 5.2 and 8.9.5, straddle channel headings to address TCB's question	T. Chu

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	7
2. TEST METHODOLOGY	8
3. FACILITIES AND ACCREDITATION	8
4. CALIBRATION AND UNCERTAINTY	9
4.1. MEASURING INSTRUMENT CALIBRATION	9
4.2. SAMPLE CALCULATION	9
4.3. MEASUREMENT UNCERTAINTY	9
5. EQUIPMENT UNDER TEST.....	10
5.1. DESCRIPTION OF EUT	10
5.2. MAXIMUM OUTPUT POWER	10
5.3. DESCRIPTION OF AVAILABLE ANTENNAS.....	11
5.4. SOFTWARE AND FIRMWARE	11
5.5. WORST-CASE CONFIGURATION AND MODE.....	12
5.6. DESCRIPTION OF TEST SETUP	13
6. TEST AND MEASUREMENT EQUIPMENT	20
7. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS	21
7.1. ON TIME AND DUTY CYCLE.....	21
7.2. MEASUREMENT METHODS.....	24
8. ANTENNA PORT TEST RESULTS.....	25
8.1. 802.11n HT20 CHAIN 0 MODE IN THE 5.2 GHz BAND	25
8.1.1. 26 dB BANDWIDTH	25
8.1.2. 99% BANDWIDTH.....	28
8.1.3. AVERAGE POWER.....	31
8.1.4. OUTPUT POWER AND PSD	32
8.2. 802.11n HT40 CHAIN 0 MODE IN THE 5.2 GHz BAND	36
8.2.1. 26 dB BANDWIDTH	36
8.2.2. 99% BANDWIDTH.....	38
8.2.3. AVERAGE POWER.....	40
8.2.4. OUTPUT POWER AND PSD	41
8.3. 802.11ac VHT80 CHAIN 0 MODE IN THE 5.2 GHz BAND	44
8.3.1. 26 dB BANDWIDTH	44
8.3.2. 99% BANDWIDTH.....	45
8.3.3. AVERAGE POWER.....	46
8.3.4. OUTPUT POWER AND PSD	47
8.4. 802.11n HT20 CHAIN 0 MODE IN THE 5.3 GHz BAND	50
8.4.1. 26 dB BANDWIDTH	50
8.4.2. 99% BANDWIDTH.....	53

8.4.3.	AVERAGE POWER.....	56
8.4.4.	OUTPUT POWER AND PSD	57
8.5.	<i>802.11n HT40 CHAIN 0 MODE IN THE 5.3 GHz BAND</i>	<i>61</i>
8.5.1.	26 dB BANDWIDTH	61
8.5.2.	99% BANDWIDTH.....	63
8.5.3.	AVERAGE POWER.....	65
8.5.4.	OUTPUT POWER AND PSD	66
8.6.	<i>802.11ac VHT80 CHAIN 0 MODE IN THE 5.3 GHz BAND</i>	<i>69</i>
8.6.1.	26 dB BANDWIDTH	69
8.6.2.	99% BANDWIDTH.....	70
8.6.3.	AVERAGE POWER.....	71
8.6.4.	OUTPUT POWER AND PSD	72
8.7.	<i>802.11n HT20 CHAIN 0 MODE IN THE 5.6 GHz BAND</i>	<i>75</i>
8.7.1.	99% BANDWIDTH.....	75
8.7.2.	26 dB BANDWIDTH	78
8.7.3.	AVERAGE POWER.....	81
8.7.4.	OUTPUT POWER AND PSD	82
8.8.	<i>802.11ac VHT20 STRADDLE CHANNEL 144 RESULTS.....</i>	<i>86</i>
8.8.1.	6 dB BANDWIDTH	90
8.9.	<i>802.11n HT40 CHAIN 0 MODE IN THE 5.6 GHz BAND</i>	<i>91</i>
8.9.1.	26 dB BANDWIDTH	91
8.9.2.	99% BANDWIDTH.....	94
8.9.3.	AVERAGE POWER.....	97
8.9.4.	OUTPUT POWER AND PSD	98
8.10.	<i>802.11ac VHT40 STRADDLE CH 142 RESULTS.....</i>	<i>102</i>
8.10.1.	6 dB BANDWIDTH.....	106
8.11.	<i>802.11ac VHT80 CHAIN 0 MODE IN THE 5.6 GHz BAND</i>	<i>107</i>
8.11.1.	26 dB BANDWIDTH.....	107
8.11.2.	99% BANDWIDTH	110
8.11.3.	AVERAGE POWER	113
8.11.4.	OUTPUT POWER AND PSD	114
8.11.5.	STRADDLE CHANNEL 138 RESULTS.....	117
8.11.6.	6 dB BANDWIDTH.....	121
8.12.	<i>802.11n HT20 CHAIN 0 MODE IN THE 5.8 GHz BAND</i>	<i>122</i>
8.12.1.	6 dB BANDWIDTH.....	122
8.12.2.	26 dB BANDWIDTH.....	125
8.12.3.	99% BANDWIDTH	128
8.12.4.	AVERAGE POWER	131
8.12.5.	OUTPUT POWER.....	132
8.12.6.	PSD	134
8.13.	<i>802.11n HT40 CHAIN 0 MODE IN THE 5.8 GHz BAND</i>	<i>137</i>
8.13.1.	6 dB BANDWIDTH.....	137
8.13.2.	26 dB BANDWIDTH.....	139
8.13.3.	99% BANDWIDTH	141
8.13.4.	AVERAGE POWER	143
8.13.5.	OUTPUT POWER.....	144
8.13.6.	PSD	146
8.14.	<i>802.11ac VHT80 CHAIN 0 MODE IN THE 5.8 GHz BAND</i>	<i>149</i>

8.14.1.	6 dB BANDWIDTH	149
8.14.2.	26 dB BANDWIDTH	150
8.14.3.	99% BANDWIDTH	151
8.14.4.	AVERAGE POWER	152
8.14.5.	OUTPUT POWER.....	153
8.14.6.	PSD	155
9.	RADIATED TEST RESULTS	157
9.1.	<i>LIMITS AND PROCEDURE.....</i>	<i>157</i>
9.1.1.	802.11n HT20 1Tx MODE IN THE 5.2 GHz BAND	158
9.1.2.	802.11n HT40 1Tx MODE IN THE 5.2 GHz BAND	166
9.1.3.	802.11ac VHT80 1Tx MODE IN THE 5.2 GHz BAND	172
9.1.4.	802.11n HT20 1Tx MODE IN THE 5.3 GHz BAND	176
9.1.5.	802.11n HT40 1Tx MODE IN THE 5.3 GHz BAND	184
9.1.6.	802.11ac VHT80 1Tx MODE IN THE 5.3 GHz BAND	190
9.1.7.	802.11n HT20 1Tx MODE IN THE 5.6 GHz BAND	194
9.1.8.	802.11ac HT20 CHANNEL 144 HARMONICS AND SPURIOUS EMISSIONS	204
9.1.9.	802.11n HT40 1Tx MODE IN THE 5.6 GHz BAND	206
9.1.10.	802.11ac HT40 CHANNEL 142 HARMONICS AND SPURIOUS EMISSIONS.....	216
9.1.11.	802.11ac VHT80 1Tx MODE IN THE 5.6 GHz BAND	218
9.1.12.	802.11n HT20 1Tx MODE IN THE 5.8 GHz BAND	226
9.1.13.	802.11n HT40 1Tx MODE IN THE 5.8 GHz BAND	236
9.1.14.	802.11ac VHT80 1Tx MODE IN THE 5.8 GHz BAND	244
9.2.	<i>WORST-CASE BELOW 1 GHz</i>	<i>250</i>
9.3.	<i>WORST-CASE ABOVE 18 GHz.....</i>	<i>252</i>
10.	AC POWER LINE CONDUCTED EMISSIONS	256
10.1.	<i>EUT POWERED BY AC ADAPTER.....</i>	<i>257</i>
10.2.	<i>EUT POWERED BY HOST PC VIA USB CABLE</i>	<i>259</i>
11.	DYNAMIC FREQUENCY SELECTION.....	261
11.1.	<i>OVERVIEW</i>	<i>261</i>
11.1.1.	LIMITS.....	261
11.1.2.	TEST AND MEASUREMENT SYSTEM	265
11.1.3.	SETUP OF EUT (CLIENT MODE)	268
11.1.4.	SETUP OF EUT (CLIENT-TO-CLIENT COMMUNICATIONS MODE).....	269
11.1.5.	DESCRIPTION OF EUT	270
11.2.	<i>CLIENT MODE RESULTS FOR 20 MHz BANDWIDTH</i>	<i>272</i>
11.2.1.	TEST CHANNEL.....	272
11.2.2.	RADAR WAVEFORM AND TRAFFIC	272
11.2.3.	OVERLAPPING CHANNEL TESTS.....	275
11.2.4.	MOVE AND CLOSING TIME	275
11.3.	<i>CLIENT MODE RESULTS FOR 40 MHz BANDWIDTH</i>	<i>279</i>
11.3.1.	TEST CHANNEL.....	279
11.3.2.	RADAR WAVEFORM AND TRAFFIC	279
11.3.3.	OVERLAPPING CHANNEL TESTS.....	282
11.3.4.	MOVE AND CLOSING TIME	282
11.4.	<i>CLIENT MODE RESULTS FOR 80 MHz BANDWIDTH</i>	<i>286</i>
11.4.1.	TEST CHANNEL.....	286

11.4.2.	RADAR WAVEFORM AND TRAFFIC	286
11.4.3.	OVERLAPPING CHANNEL TESTS	289
11.4.4.	MOVE AND CLOSING TIME	289
11.4.5.	10-MINUTE CLIENT Tx MONITORING PERIOD	293
11.5.	<i>CLIENT-TO-CLIENT COMMUNICATIONS MODE RESULTS FOR 20 MHz BANDWIDTH</i> 294	
11.5.1.	TEST CHANNEL.....	294
11.5.2.	RADAR WAVEFORM AND TRAFFIC	294
11.5.3.	OVERLAPPING CHANNEL TESTS	297
11.5.4.	MOVE AND CLOSING TIME	297
11.6.	<i>CLIENT-TO-CLIENT COMMUNICATIONS MODE RESULTS FOR 40 MHz BANDWIDTH</i> 301	
11.6.1.	TEST CHANNEL.....	301
11.6.2.	RADAR WAVEFORM AND TRAFFIC	301
11.6.3.	OVERLAPPING CHANNEL TESTS	304
11.6.4.	MOVE AND CLOSING TIME	304
11.7.	<i>CLIENT-TO-CLIENT COMMUNICATIONS MODE RESULTS FOR 80 MHz BANDWIDTH</i> 308	
11.7.1.	TEST CHANNEL.....	308
11.7.2.	RADAR WAVEFORM AND TRAFFIC	308
11.7.3.	OVERLAPPING CHANNEL TESTS	311
11.7.4.	MOVE AND CLOSING TIME	311
11.7.5.	10-MINUTE CLIENT Tx MONITORING PERIOD	315
12.	SETUP PHOTOS.....	316

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: APPLE, INC.
1 INFINITE LOOP
CUPERTINO, CA 95014, U.S.A.

EUT DESCRIPTION: CELLULAR PHONE WITH BLUETOOTH AND WLAN RADIOS

MODEL: A1662

SERIAL NUMBER: RADIATED (C39Q400TGR1X), CONDUCTED (C39QG05PGXC2)
DFS(C39Q303MGR22)

DATE TESTED: AUGUST 20, 2015 – FEBRUARY 03, 2016


APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart E	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:

Tested By:



MENGISTU MEKURIA
SENIOR ENGINEER
UL VERIFICATION SERVICES INC.

ERIC YU
EMC LAB ENGINEER
UL VERIFICATION SERVICES INC.

2. TEST METHODOLOGY

FCC: The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, FCC 14-30, FCC KDB 662911 D01 v02r01, FCC KDB 905462 D02 v01r02/D03 v01r01/D06 v01, FCC KDB 789033 D02 v01r01, FCC KDB 644545 D03 v01, ANSI C63.10-2013.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
☐ Chamber A	☒ Chamber D
☐ Chamber B	☐ Chamber E
☐ Chamber C	☒ Chamber F
	☒ Chamber G
	☒ Chamber H

The above test sites and facilities are covered under FCC Test Firm Registration # 208313. Chambers A through H are covered under Industry Canada company address code 2324B with site numbers 2324B -1 through 2324B-8, respectively.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \text{Cable} \\ &\text{Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	± 3.52 dB
Radiated Disturbance, 30 to 1000 MHz	± 4.94 dB
Radiated Disturbance, 1 to 6 GHz	± 3.86 dB
Radiated Disturbance, 6 to 18 GHz	± 4.23 dB
Radiated Disturbance, 18 to 26 GHz	± 5.30 dB
Radiated Disturbance, 26 to 40 GHz	± 5.23 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT, Model A1662 is a mobile phone with multimedia functions (music, application support, and video), cellular GSM/GPRS/EGPRS/CDMA/WCDMA/HSPA+/DC-HSDPA/LTE radio, IEEE 802.11a/b/g/n/ac radio, Bluetooth radio and NFC. The rechargeable battery is not user accessible.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum conducted output power as follows:

5.2GHz Band

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5180 - 5240	802.11a	Covered by 802.11n HT20 SISO	
	802.11n HT20 SISO	18.00	63.10
5190 - 5230	802.11n HT40 SISO	18.00	63.10
5210	802.11ac VHT80 SISO	14.93	31.12

5.3GHz Band

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5260 - 5320	802.11a	Covered by 802.11n HT20 SISO	
	802.11n HT20 SISO	17.50	56.23
5270 - 5310	802.11n HT40 SISO	17.46	55.72
5290	802.11ac VHT80 SISO	15.50	35.48

5.6GHz Band

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5500 - 5700	802.11a	Covered by 802.11n HT20 SISO	
5500 - 5700	802.11n HT20 SISO	16.96	49.66
5720	802.11ac VHT20 SISO (based on UNII-2C band output power)	15.21	33.19
5510 - 5670	802.11n HT40 SISO	16.96	49.66
5710	802.11ac VHT40 SISO (based on UNII-2C band output power)	16.58	45.50
5530-5610	802.11ac VHT80 SISO	17.00	50.12
5690	802.11ac VHT80 SISO (based on UNII-2C band output power)	16.67	46.45

5.8GHz Band

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5745 - 5825	802.11a	Covered by 802.11n HT20 SISO	
5745 - 5825	802.11n HT20 SISO	16.97	49.77
5755 - 5795	802.11n HT40 SISO	16.91	49.09
5775	802.11ac VHT80 SISO	14.44	27.80

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

Frequency Band (GHz)	Antenna Gain (dBi)
5.2	-6.72
5.3	-5.22
5.5	-5.27
5.8	-4.90

5.4. SOFTWARE AND FIRMWARE

The firmware installed in the EUT during testing was 7.47.130.1

5.5. WORST-CASE CONFIGURATION AND MODE

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X (Flatbed), Y (Landscape), Z (Portrait), it was determined that (see table below) was worst-case orientations. Therefore, all final radiated testing was performed with the EUT in (see table below) orientation.

Mode	Worst-case Orientation
1TX SISO	Y-Landscape

Worst-case data rates as provided by the client were:

802.11a mode: 6 Mbps
802.11n HT20 mode: MCS0
802.11n HT40 mode: MCS0
802.11ac VHT20 mode: MCS0
802.11ac VHT40 mode: MCS0
802.11ac VHT80 mode: MCS0

802.11ac VHT20 and VHT40 mode are different from 802.11nHT20 and HT40 only in control messages and have the same power settings.

There are two vendors of the WiFi/Bluetooth radio modules: variant 1 and variant 2. The Wi-Fi/Bluetooth radio modules have the same mechanical outline (e.g., the same package dimension and pin-out layout), use the same on-board antenna matching circuit, have an identical antenna structure, and are built and tested to conform to the same specifications and to operate within the same tolerances.

Baseline testing was performed on the two variants to determine the worst case on all conducted power and radiated emissions.

For simultaneous transmission of multiple channels from the same antenna in the 2.4GHz and 5GHz bands, tests were conducted for various configurations having the highest power, least separation in frequencies and widest operation bandwidths. No noticeable new emission was found.

The following configurations were investigated on AC line conducted test.

Configuration	Descriptions
1	EUT powered by AC/DC adapter via USB cable
2	EUT powered by host PC via USB cable

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop	Dell	Latitude 3540	2855590842	N/A
Laptop AC/DC adapter	Dell	FA90PE1-00	CN-0CM889-73245-95L-4954-A00	N/A
Earphone	Apple	NA	NA	N/A
EUT AC/DC adapter	Apple	A1385	D293062E3ZDDLHCR	N/A

I/O CABLES (CONDUCTED TEST)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	Antenna	1	SMA	Un-Shielded	0.2	To spectrum Analyzer
2	USB	1	USB	Shielded	1	N/A
3	AC	1	AC	Un-shielded	3	N/A

I/O CABLES (RADIATED ABOVE 1 GHZ)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
None Used						

I/O CABLES (RADIATED BELOW 1 GHZ)

I/O Cable List						
Cable No	Port	# of identical	Connector Type	Cable Type	Cable Length (m)	Remarks
1	Headphones Jack	1	3.5mm Audio	Shielded	0.9	N/A
2	AC	1	AC	Un-shielded	3	N/A

I/O CABLES (AC LINE CONDUCTED: AC/DC ADAPTER)

I/O Cable List						
Cable No	Port	# of identical	Connector Type	Cable Type	Cable Length (m)	Remarks
1	Headphones Jack	1	3.5mm Audio	Shielded	0.9	N/A
2	AC	1	AC	Un-shielded	3	N/A


I/O CABLES (AC LINE CONDUCTED: LAPTOP CONFIGUARTION)

I/O Cable List						
Cable No	Port	# of identical	Connector Type	Cable Type	Cable Length (m)	Remarks
1	Headphones Jack	1	3.5mm Audio	Shielded	0.9	N/A
2	USB	1	USB	Shielded	1	N/A
3	AC	1	AC	Un-shielded	3	N/A

TEST SETUP - CONDUCTED TESTS

The EUT was tested connected to a host Laptop via USB cable adapter and spectrum analyzer to antenna port. Test software exercised the EUT.


SETUP DIAGRAM

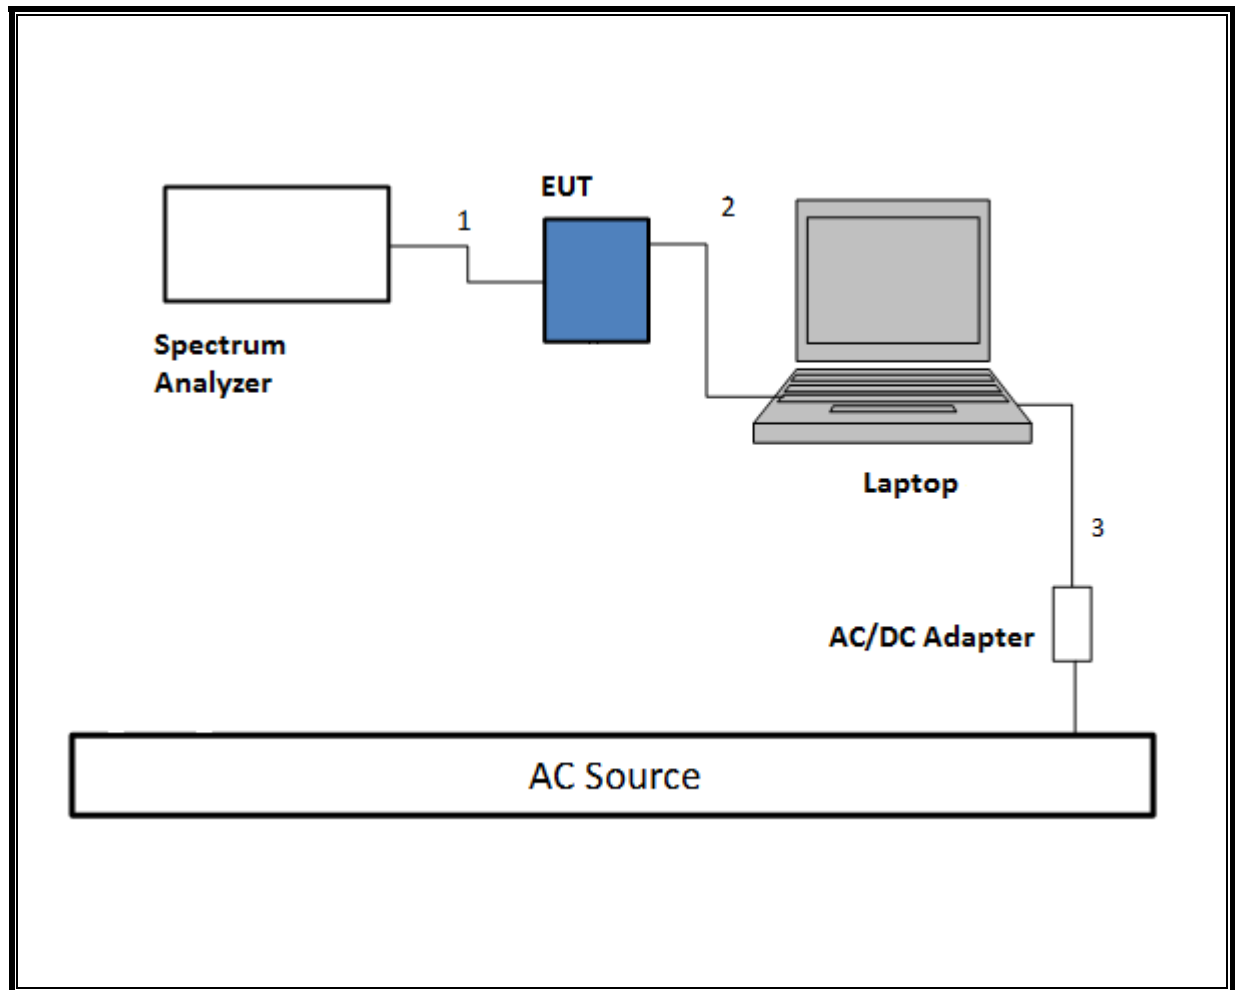

TEST SETUP- RADIATED-ABOVE 1 GHZ

The EUT was tested battery powered. Test software exercised the EUT.


SETUP DIAGRAM

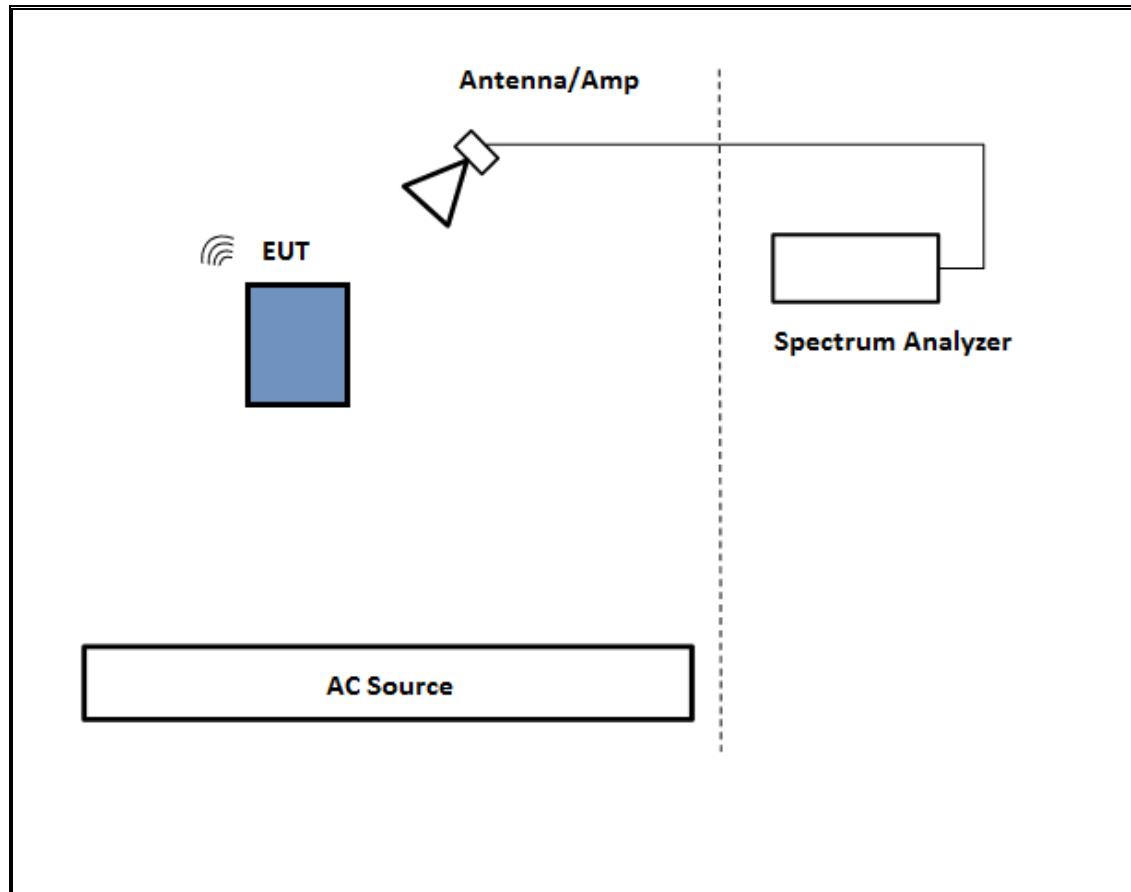

TEST SETUP- BELOW 1GHz

The EUT was tested with earphone connected and powered by AC adapter. Test software exercised the EUT.


SETUP DIAGRAM

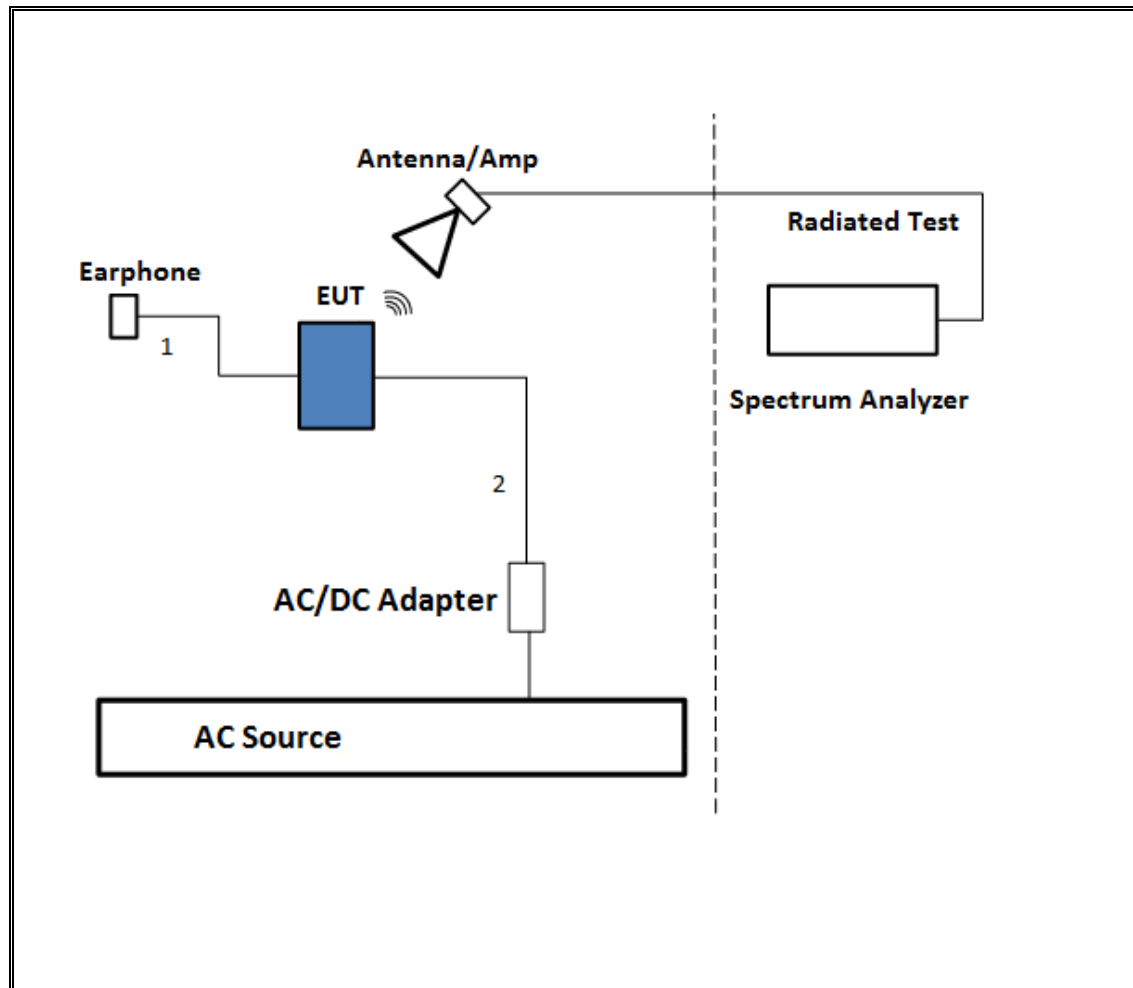

TEST SETUP- AC LINE CONDUCTED: AC/DC ADAPTER

The EUT was tested with earphone connected and powered by AC/DC adapter via USB cable. Test software exercised the EUT.


SETUP DIAGRAM

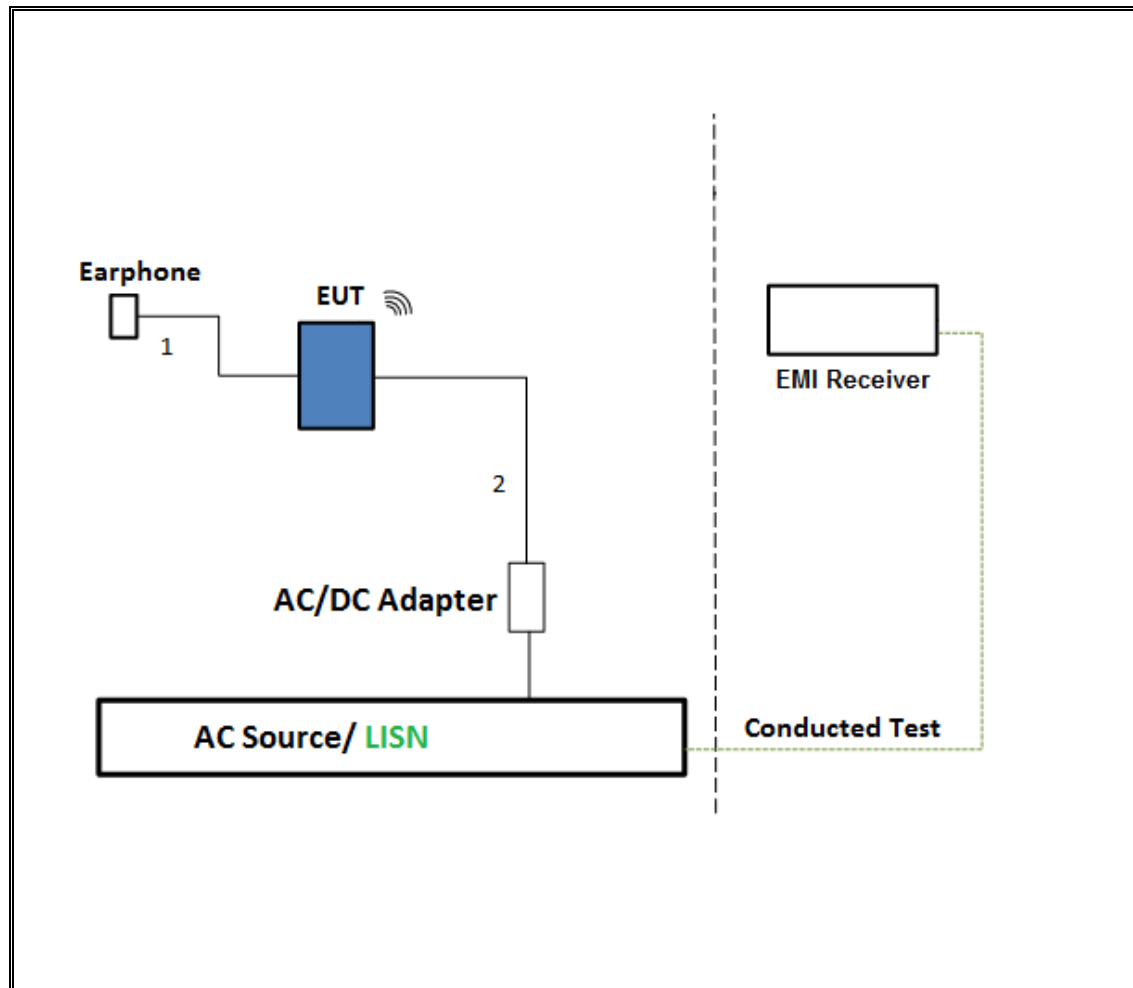

TEST SETUP- AC LINE CONDUCTED: LAPTOP CONFIGURATION

The EUT was tested with earphone connected and powered by host PC via USB cable. Test software exercised the EUT.

SETUP DIAGRAM

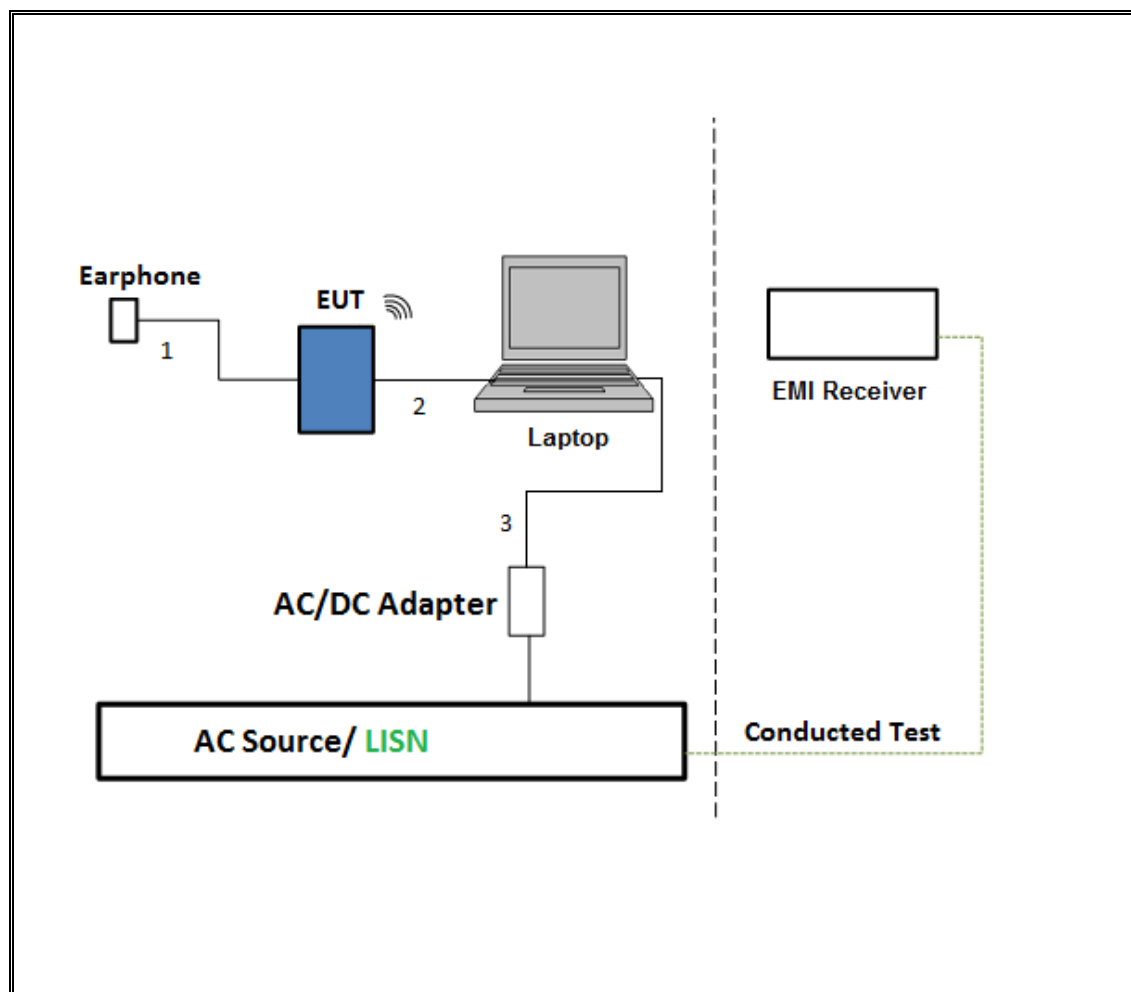

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	Asset	Cal Due
Antenna, Horn 1-18GHz	ETS Lindgren	3117	00143448	2/10/2016
**Antenna, Broadband Hybrid, 30MHz to 2000MHz	Sunol Sciences	JB3	A022813-1	1/14/2016
**Amplifier, 1 - 18GHz	Miteq	AFS42-00101800-25-S-42	1782158	1/26/2016
Amplifier, 10KHz to 1GHz, 32dB	Sonoma	310N	323561	6/8/2016
Spectrum Analyzer, PXA, 3Hz to 50GHz	Agilent	N9030A	MY52350427	9/13/2016
Amplifier, 10KHz to 1GHz, 32dB	Sonoma	310N	325117	6/9/2016
**Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent	N9030A-544	US51160264	12/23/2015
Power Meter, P-series single channel	Agilent	N1911A	GB45100212	10/9/2016
Power Sensor, P - series, 50MHz to 18GHz, Wideband	Agilent	N1921A	MY53260010	7/12/2016
**Antenna, Horn 18 to 26.5GHz	ARA	MWH-1826	1049	12/17/2015
**Horn Antenna, 40GHz	ARA	MWH-2640/B	1029	7/15/2016
Spectrum Analyzer, 40 GHz	Agilent	8564E	3943A01643	8/6/2016
Amplifier, 1 to 26.5GHz, 23.5dB Gain minimum	Agilent	8449B	3008A01114	10/4/2016
Amplifier, 26 to 40GHz	Miteq	NSP4000-SP2	1029	9/3/2016
AC Line Conducted				
EMI Test Receiver 9KHz-7GHz	Rohde & Schwarz	ESCI7	100935	9/16/2016
**LISN for Conducted Emissions CISPR-16	FCC	50/250-25-2	114	1/16/2016
Power Cable, Line Conducted Emissions ANSI 63.4	UL	PG1	N/A	7/28/2016
UL SOFTWARE				
*Radiated Software	UL	UL EMC	Ver 9.5, July 22, 2014	
*Conducted Software	UL	UL EMC	Ver 2.2, March 31, 2015	
*AC Line Conducted Software	UL	UL EMC	Ver 9.5, April 3, 2015	

Note: * indicates automation software version used in the compliance certification testing
 ** testing is completed before equipment calibration expiration date.

7. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS

7.1. ON TIME AND DUTY CYCLE

LIMITS

None; for reporting purposes only.



PROCEDURE


KDB 789033 Zero-Span Spectrum Analyzer Method.

RESULTS

Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/B Minimum VBW (kHz)
802.11n HT20 1TX	1.914	1.935	0.989	98.91%	0.00	0.010
802.11n HT40 1TX	1.122	1.144	0.981	98.08%	0.00	0.010
802.11ac VHT80 1TX	0.542	0.564	0.961	96.10%	0.17	1.845

DUTY CYCLE PLOTS

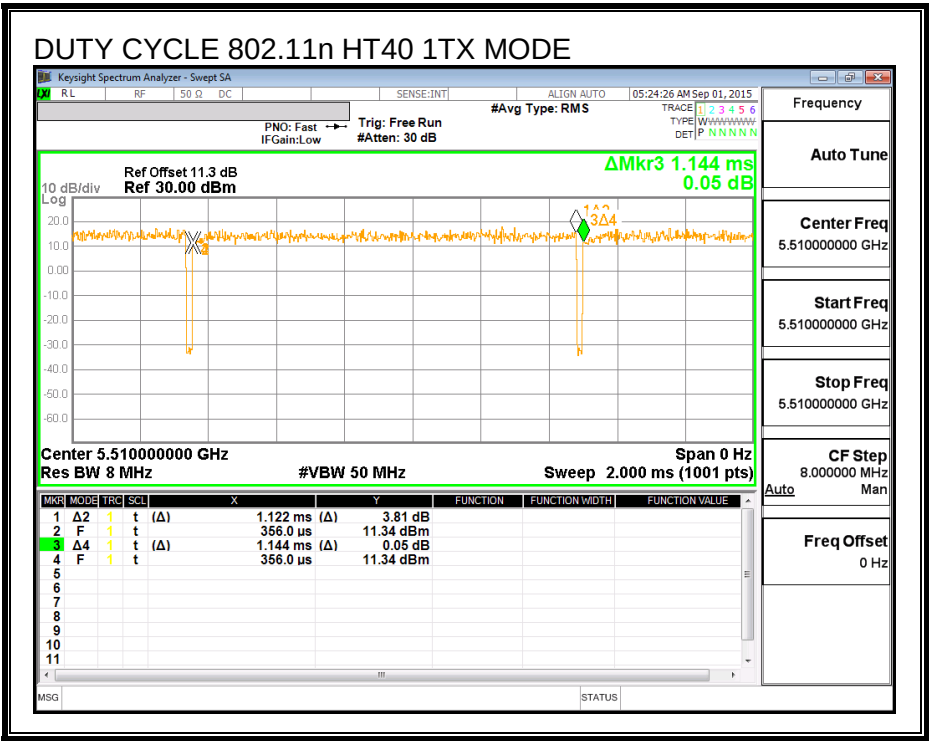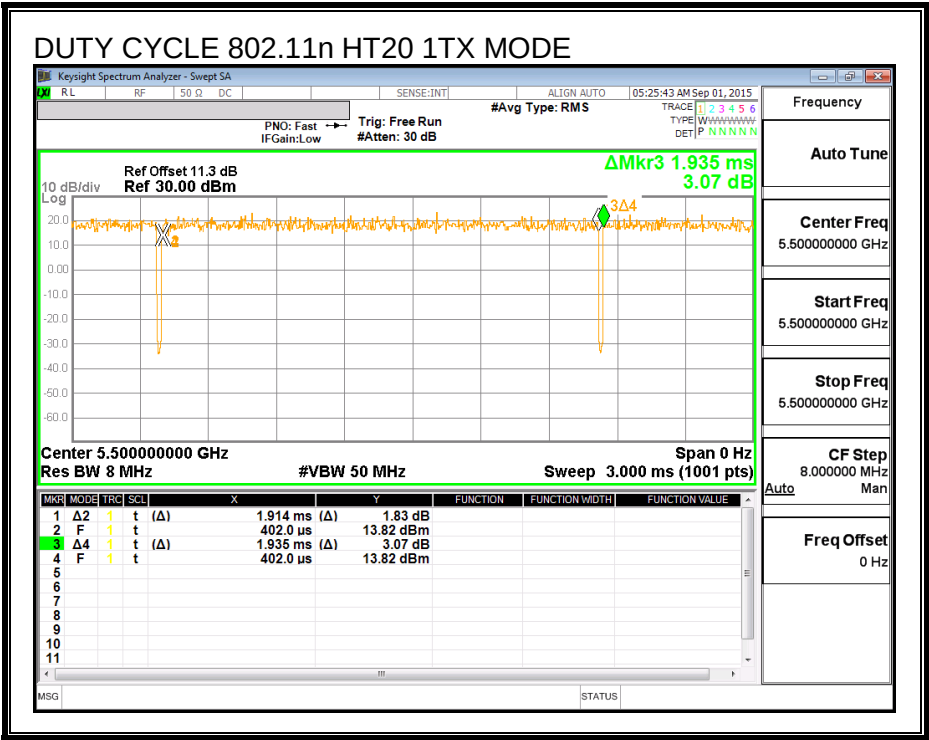

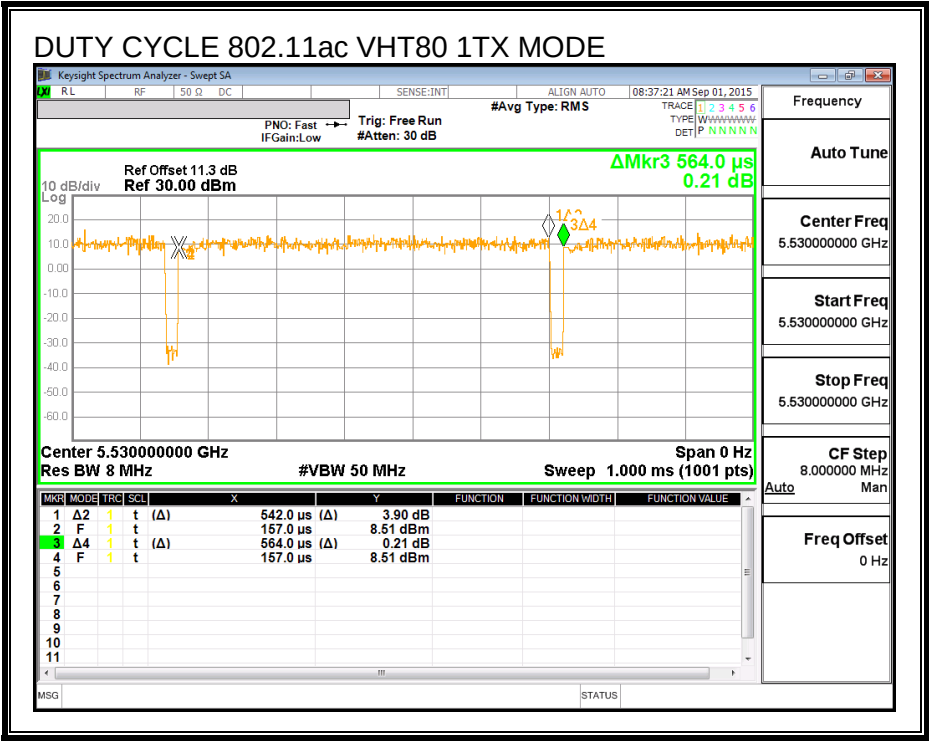

7.2. MEASUREMENT METHODS

26 dB Emission BW: KDB 789033 D02 v01r01, Section C.

99% Occupied BW: KDB 789033 D02 v01r01, Section D.

Conducted Output Power: KDB 789033 D02 v01r01, Section E.3.b (Method PM-G).

Power Spectral Density: KDB 789033 D02 v01r01, Section F.

Unwanted emissions in restricted bands: KDB 789033 D02 v01r01, Sections G.3, G.4, G.5, and G.6.

Unwanted emissions in non-restricted bands: KDB 789033 D02 v01r01, Sections G.3, G.4, and G.5.

8. ANTENNA PORT TEST RESULTS

8.1. 802.11n HT20 CHAIN 0 MODE IN THE 5.2 GHz BAND

8.1.1. 26 dB BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS

Frequency (MHz)	26 dB Bandwidth (MHz)
5180	20.646
5200	21.280
5240	21.024

26 dB BANDWIDTH

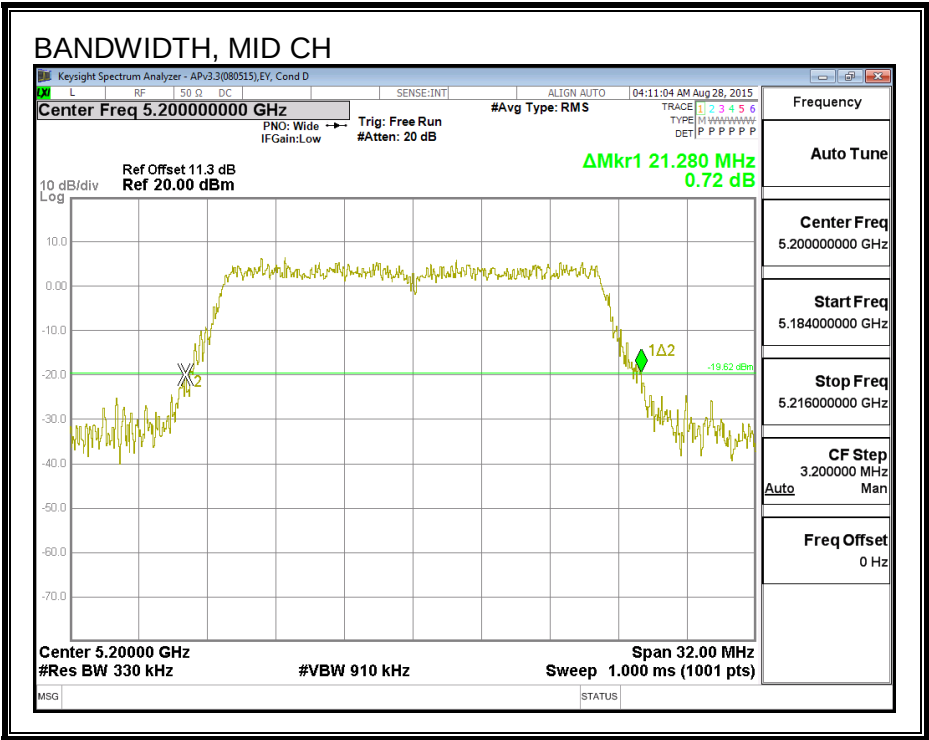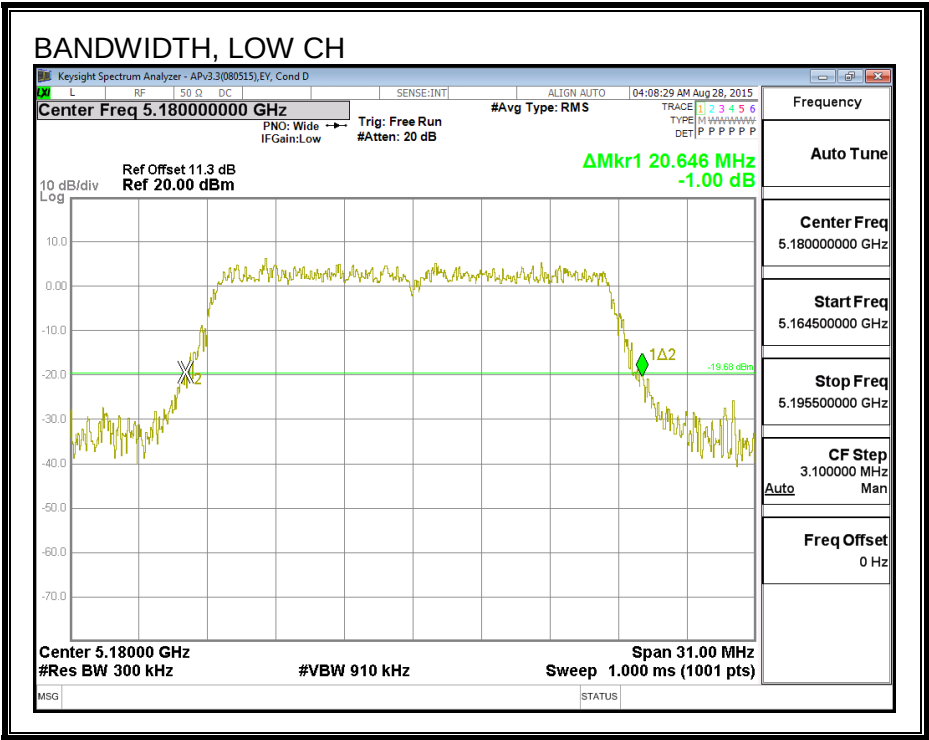

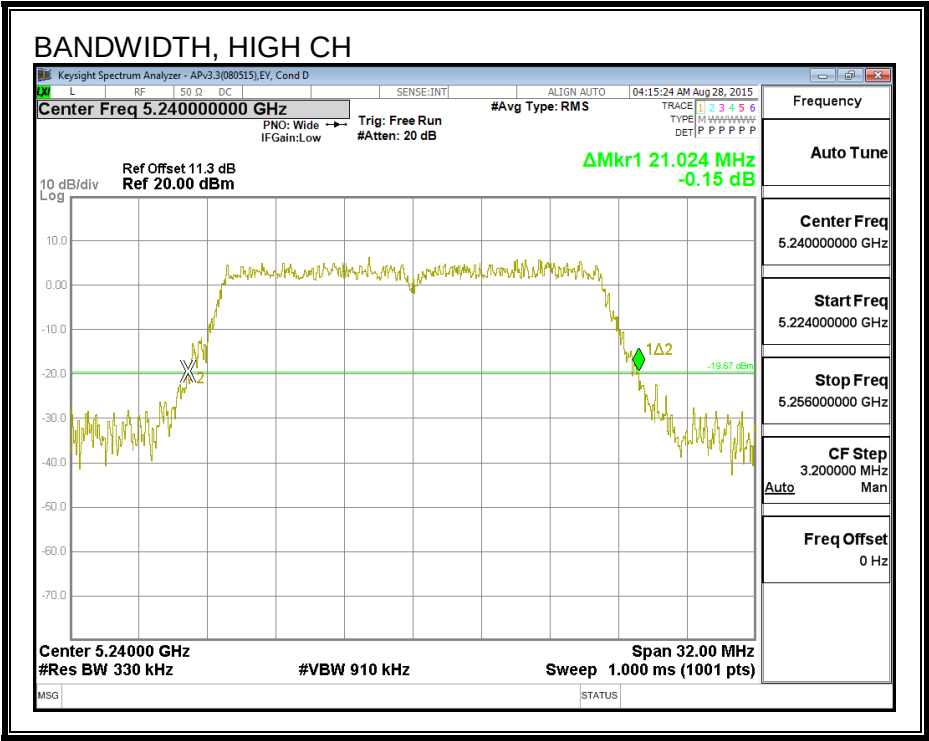

8.1.2. 99% BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% BW (MHz)
Low	5180	17.818
Mid	5200	17.794
High	5240	17.861

99% BANDWIDTH

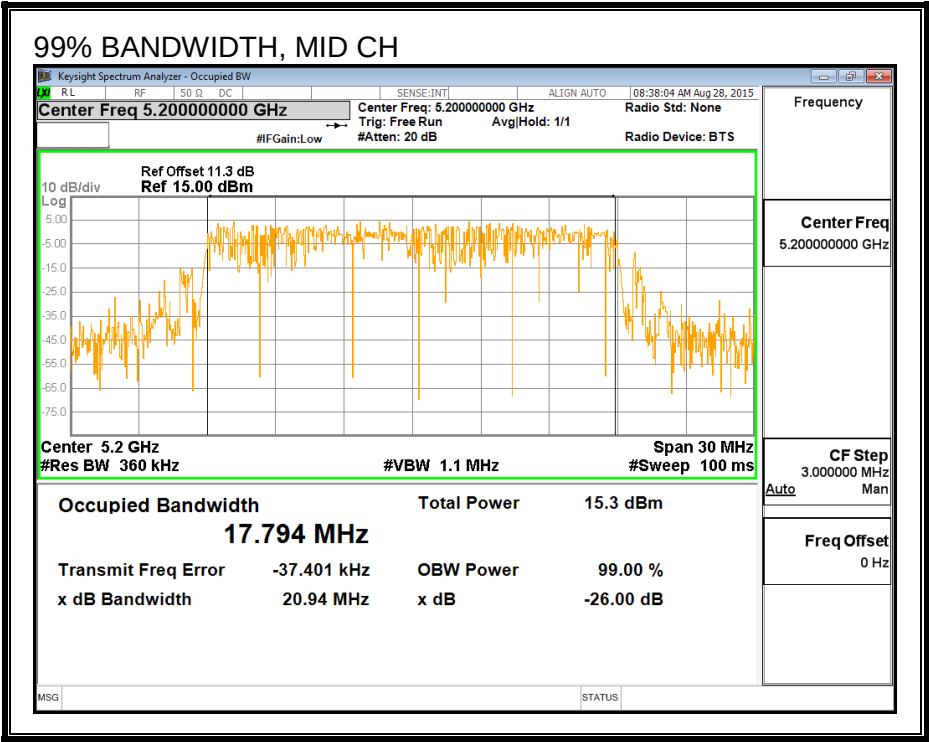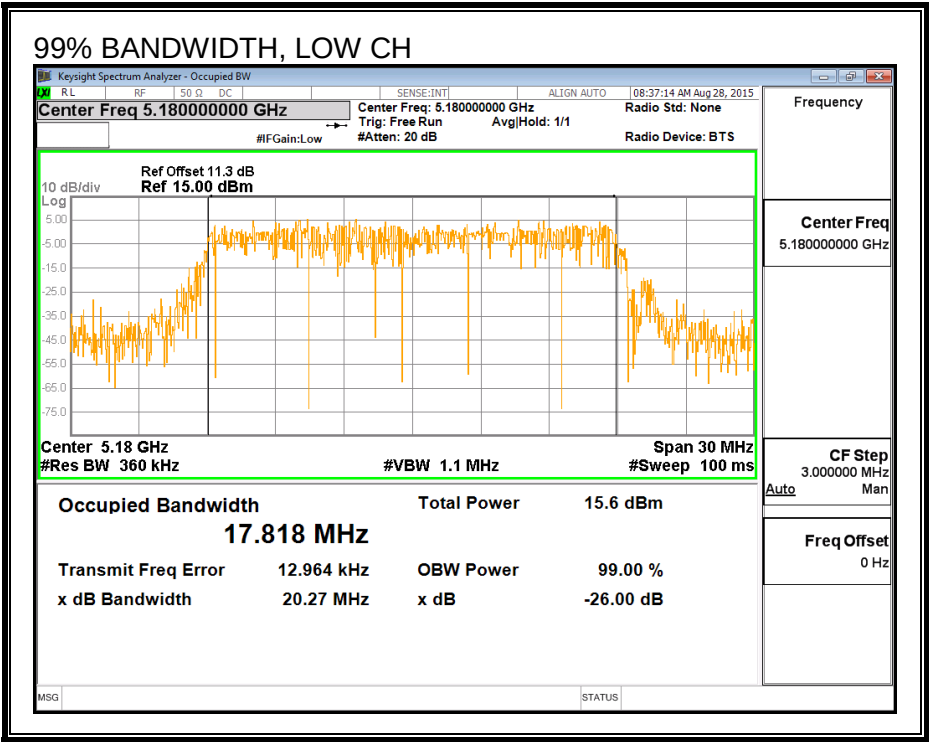

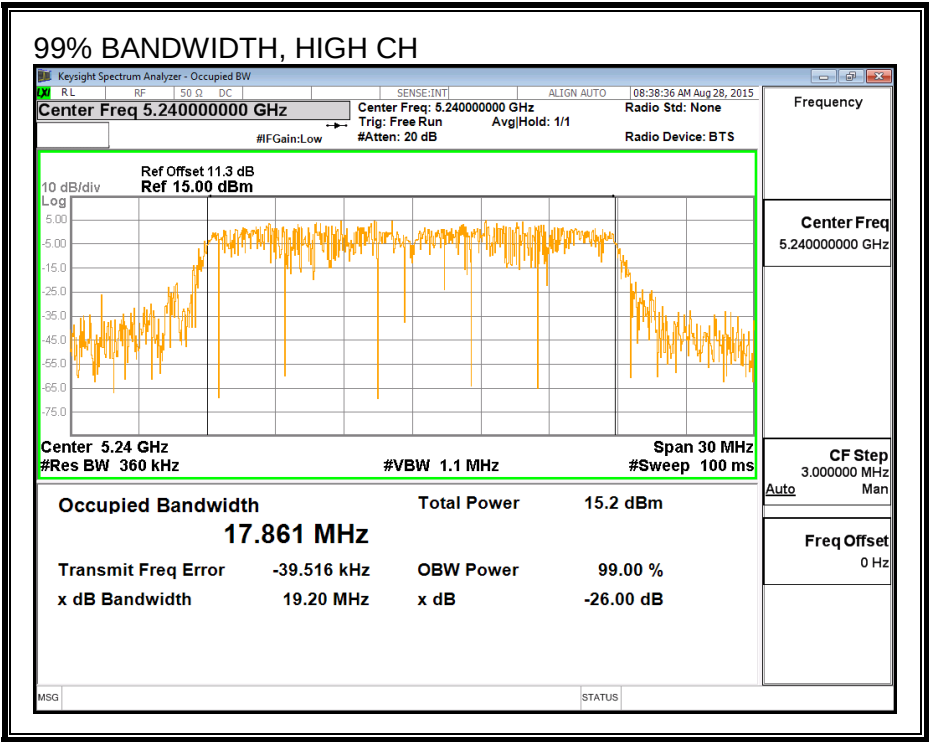

8.1.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

Channel	Frequency (MHz)	Power (dBm)
Low	5180	17.90
Mid	5200	17.81
High	5240	18.00

8.1.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5180	-6.72	-6.72	24.00	11.00
Mid	5200	-6.72	-6.72	24.00	11.00
High	5240	-6.72	-6.72	24.00	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--



Output Power Results


Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	17.90	17.90	24.00	-6.10
Mid	5200	17.81	17.81	24.00	-6.19
High	5240	18.00	18.00	24.00	-6.00

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5180	6.44	6.44	11.00	-4.56
Mid	5200	6.22	6.22	11.00	-4.78
High	5240	6.47	6.47	11.00	-4.53

PSD

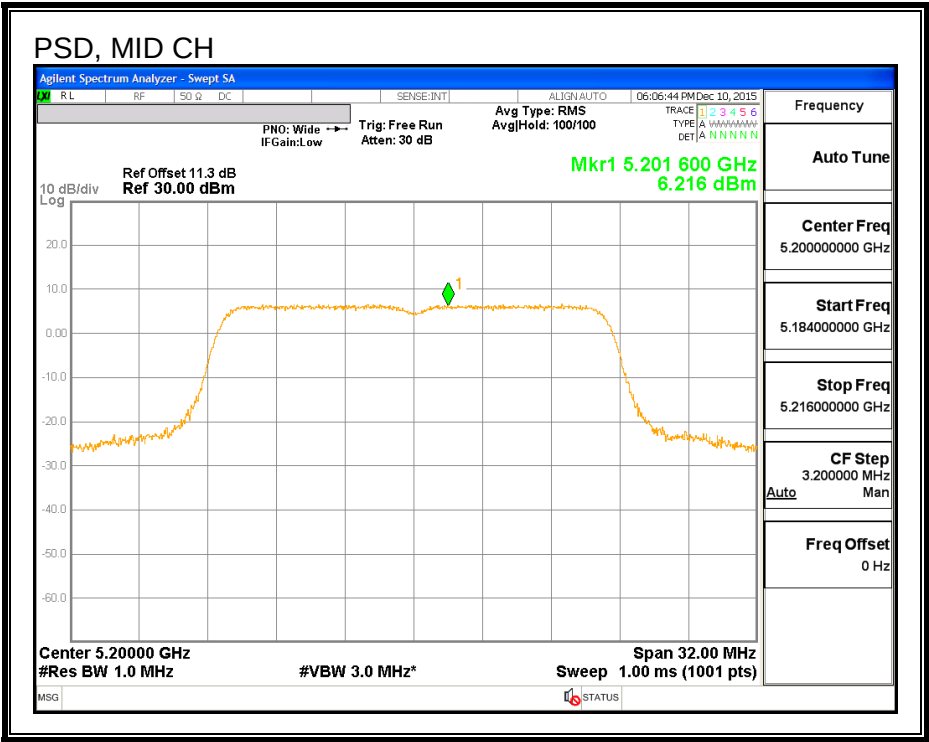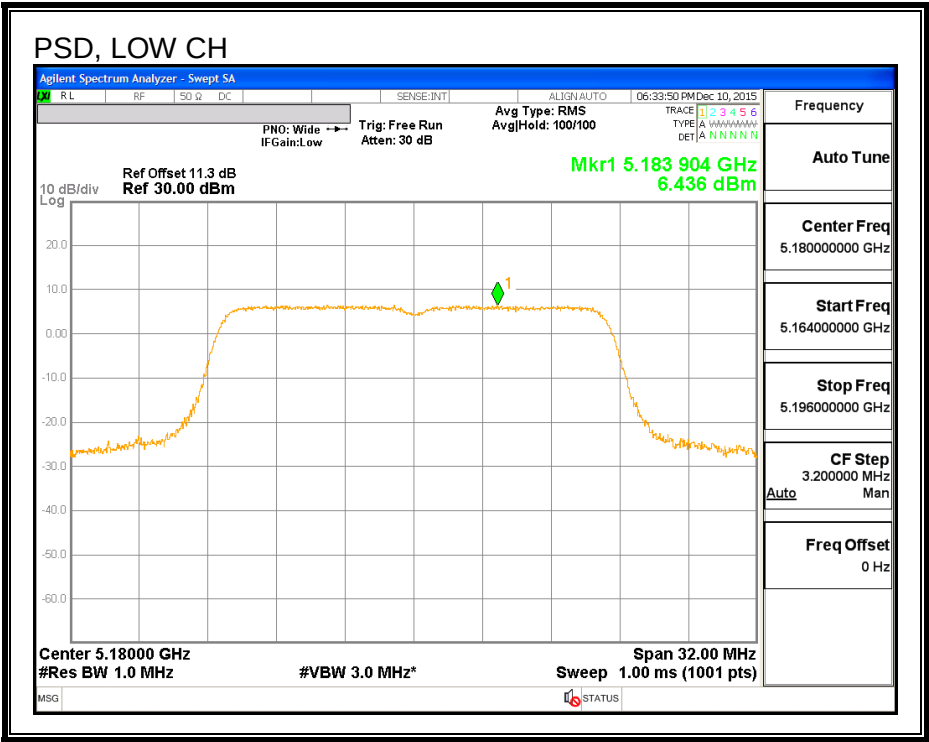

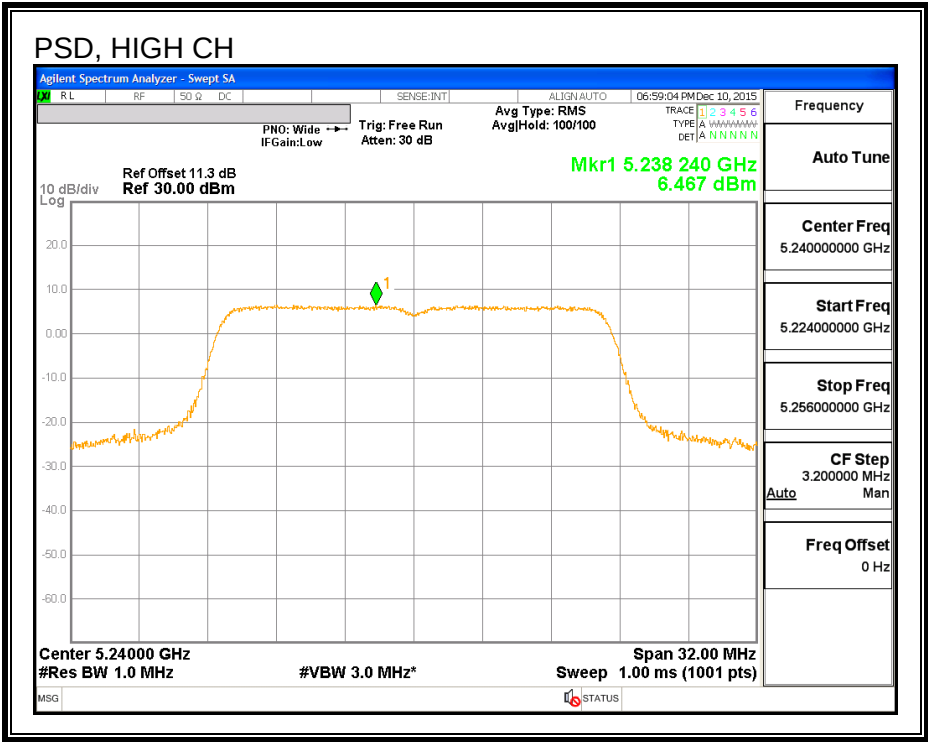

8.2. 802.11n HT40 CHAIN 0 MODE IN THE 5.2 GHz BAND

8.2.1. 26 dB BANDWIDTH



LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5190	40.26
High	5230	39.78

26 dB BANDWIDTH

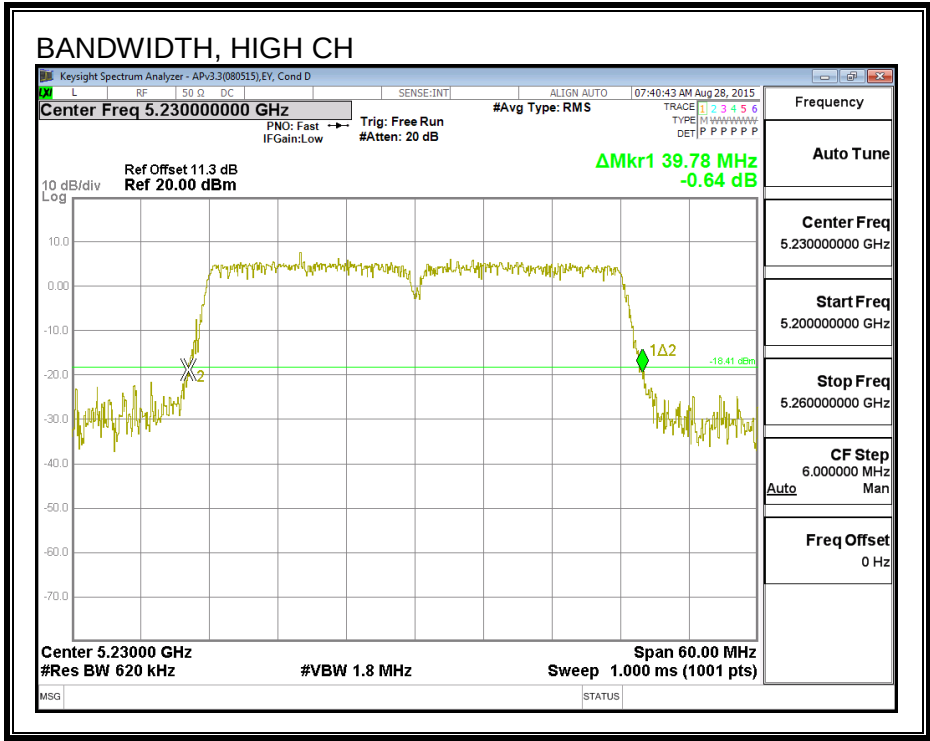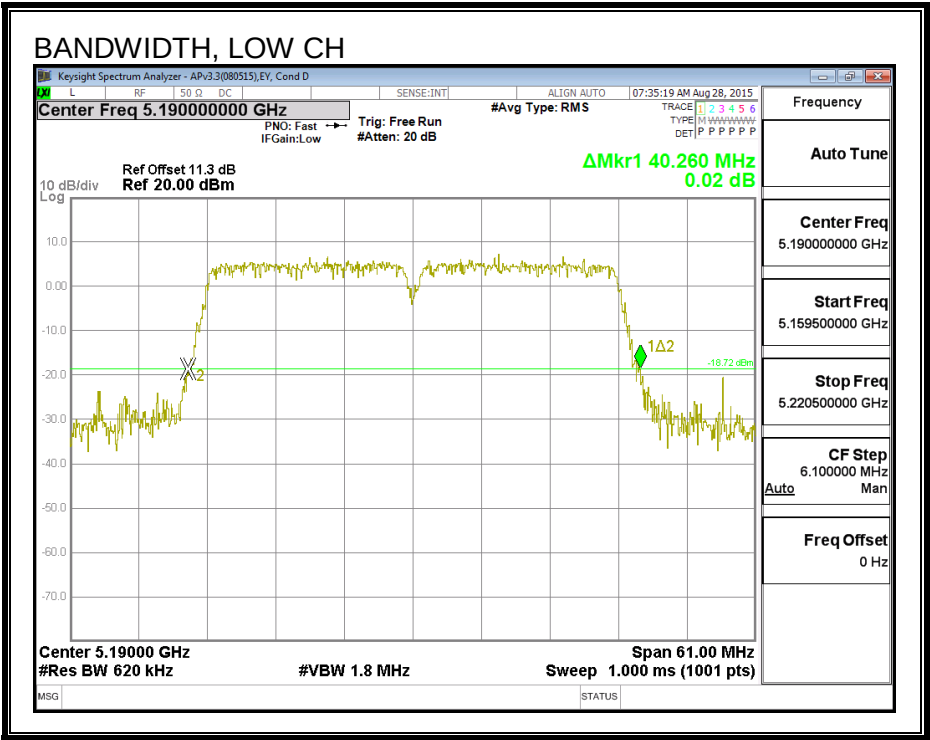

8.2.2. 99% BANDWIDTH



LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5190	36.303
High	5230	36.232

99% BANDWIDTH

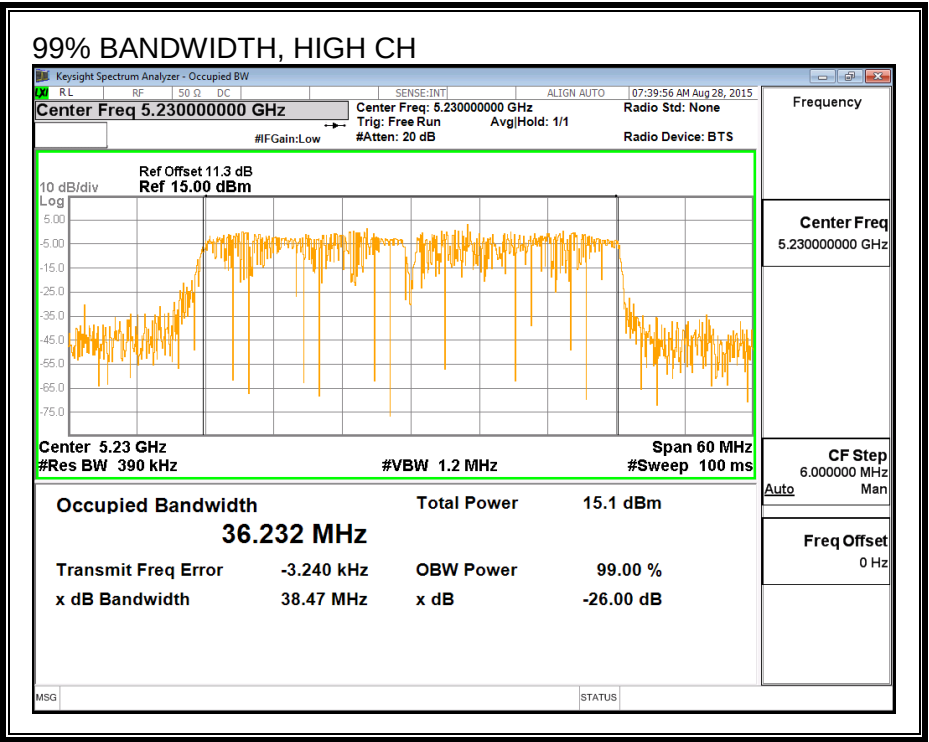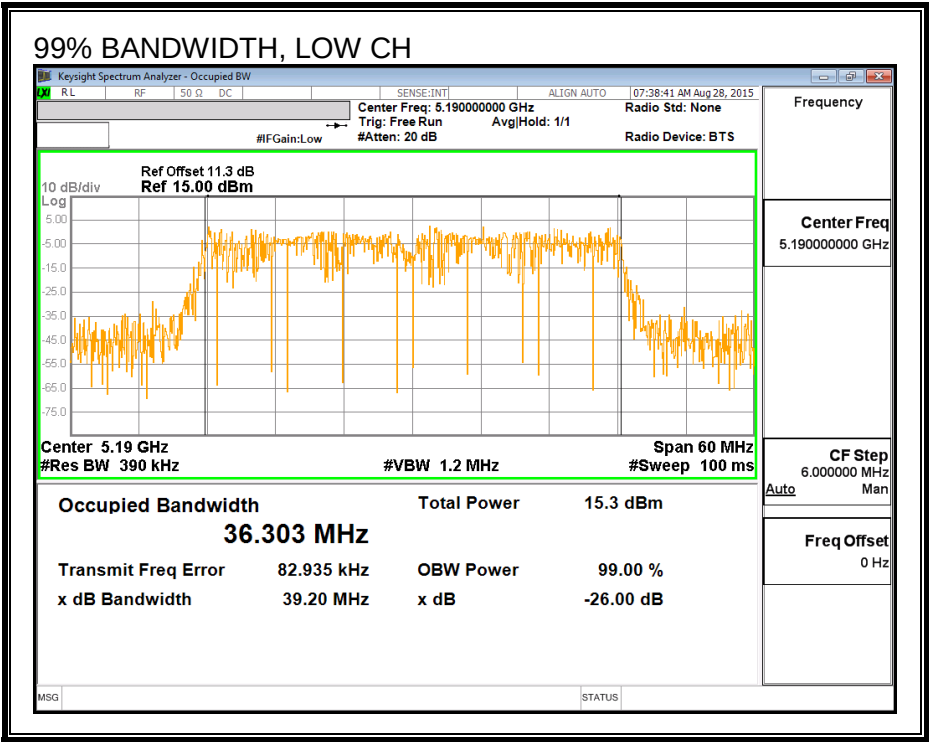

8.2.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

Channel	Frequency (MHz)	Power (dBm)
Low	5190	15.99
High	5230	18.00

8.2.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple colocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5190	-6.72	-6.72	24.00	11.00
High	5230	-6.72	-6.72	24.00	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--



Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	15.99	15.99	24.00	-8.01
High	5230	18.00	18.00	24.00	-6.00

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5190	1.57	1.57	11.00	-9.43
High	5230	3.42	3.42	11.00	-7.58

PSD

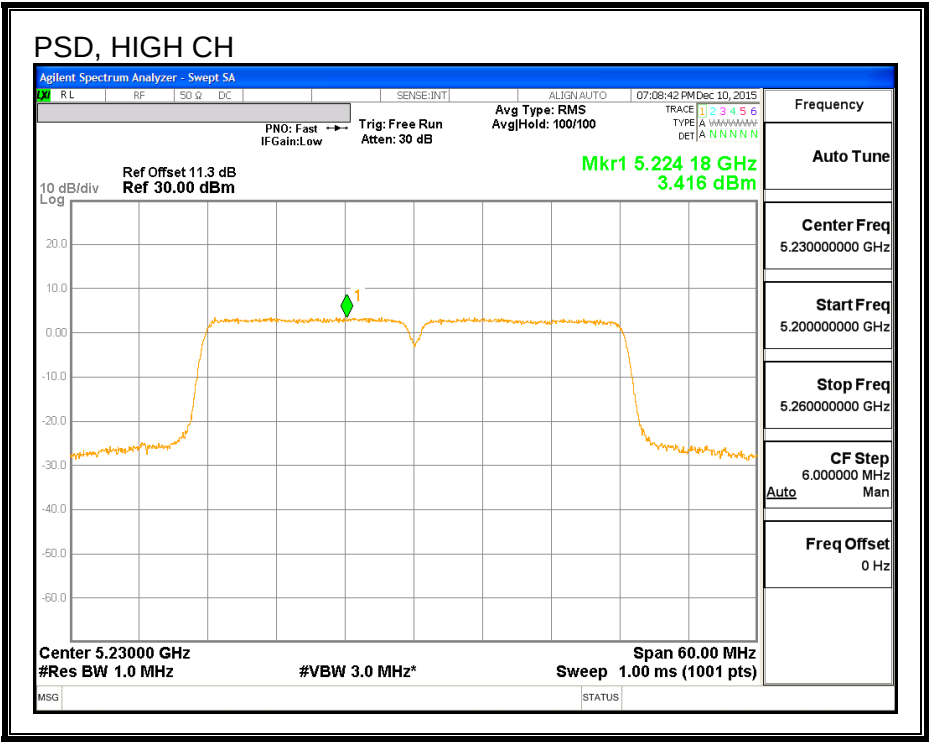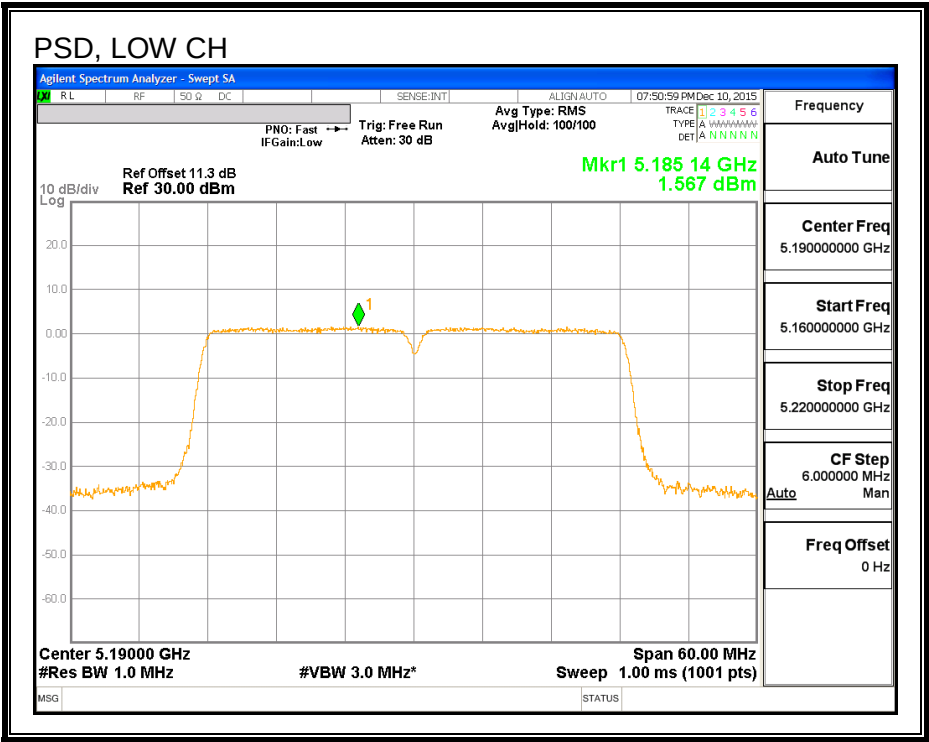

8.3. 802.11ac VHT80 CHAIN 0 MODE IN THE 5.2 GHz BAND

8.3.1. 26 dB BANDWIDTH


LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Mid	5210	81.918

26 dB BANDWIDTH

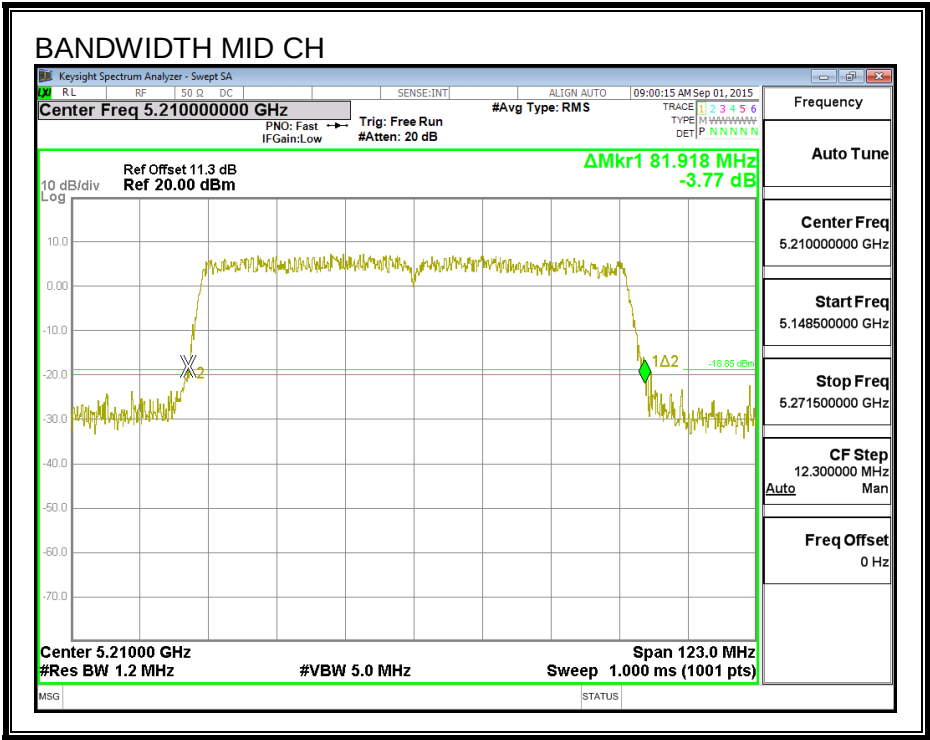

8.3.2. 99% BANDWIDTH


LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Mid	5210	76.058

99% BANDWIDTH

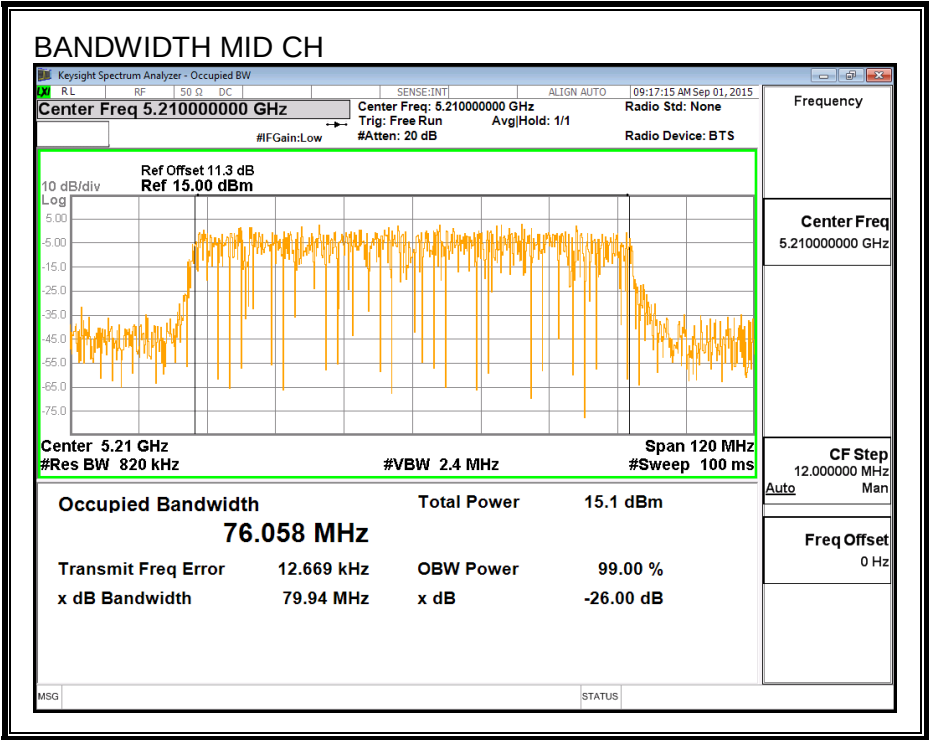

8.3.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

Channel	Frequency (MHz)	Power (dBm)
Mid	5210	14.93

8.3.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple colocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Mid	5210	-6.72	-6.72	24.00	11.00

Duty Cycle CF (dB)	0.17	Included in Calculations of Corr'd PSD
--------------------	------	--


Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5210	14.93	14.93	24.00	-9.07

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Mid	5210	-2.19	-2.02	11.00	-13.02

PSD

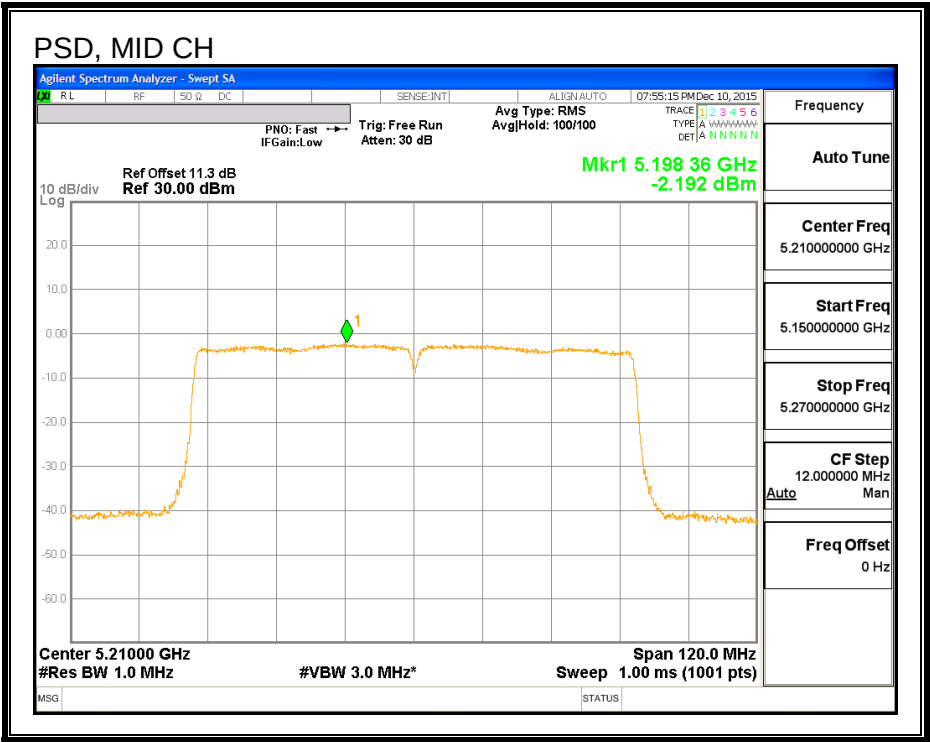

8.4. 802.11n HT20 CHAIN 0 MODE IN THE 5.3 GHz BAND

8.4.1. 26 dB BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5260	20.672
Mid	5300	21.216
High	5320	20.960

26 dB BANDWIDTH

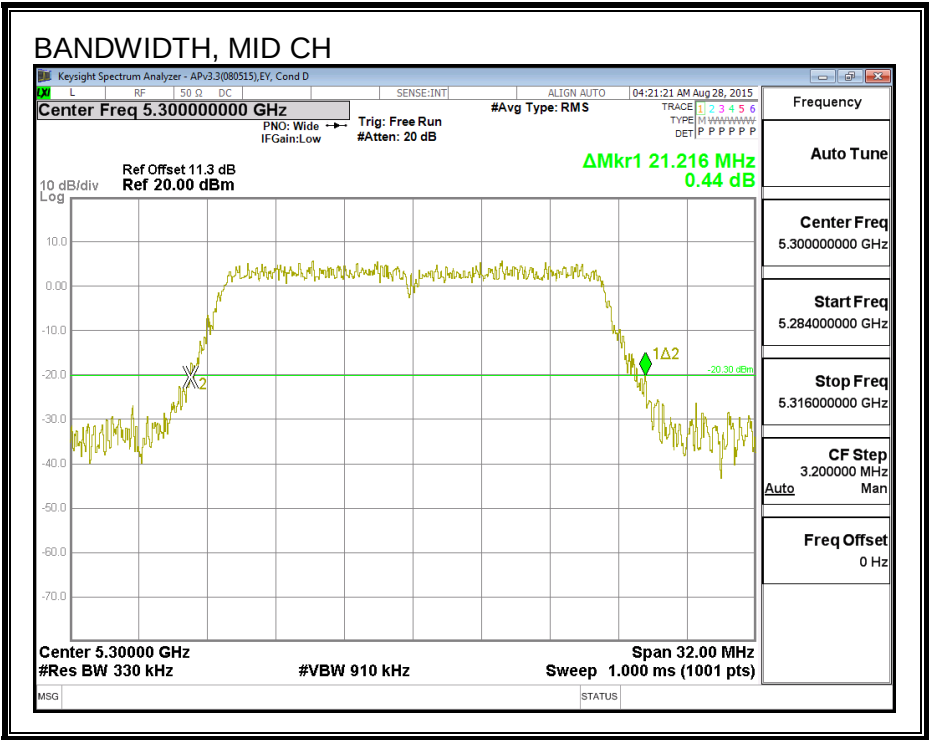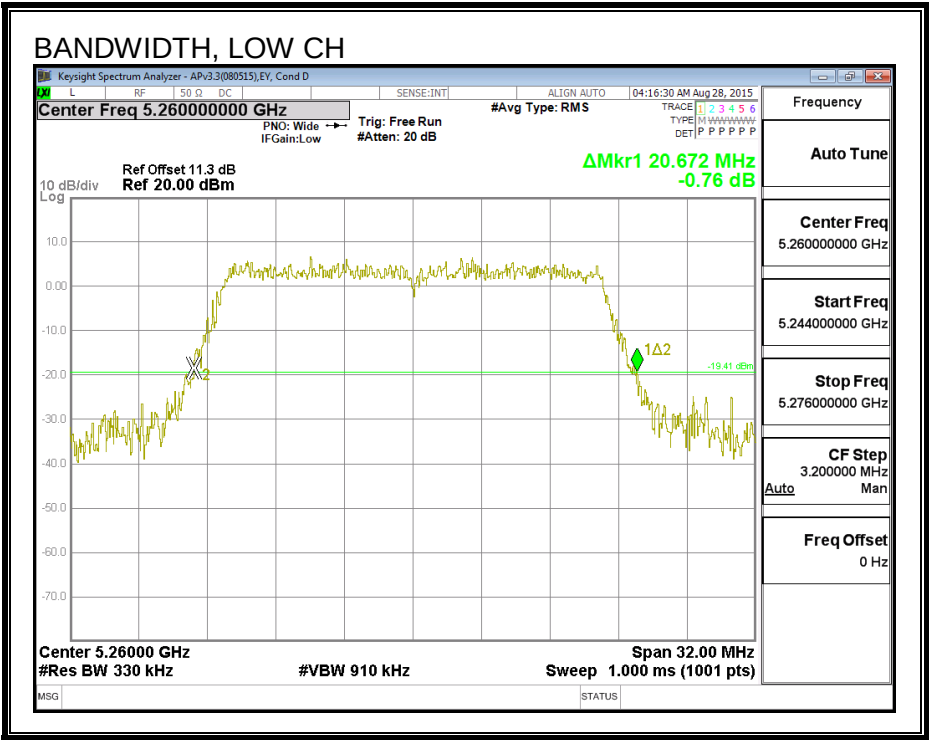

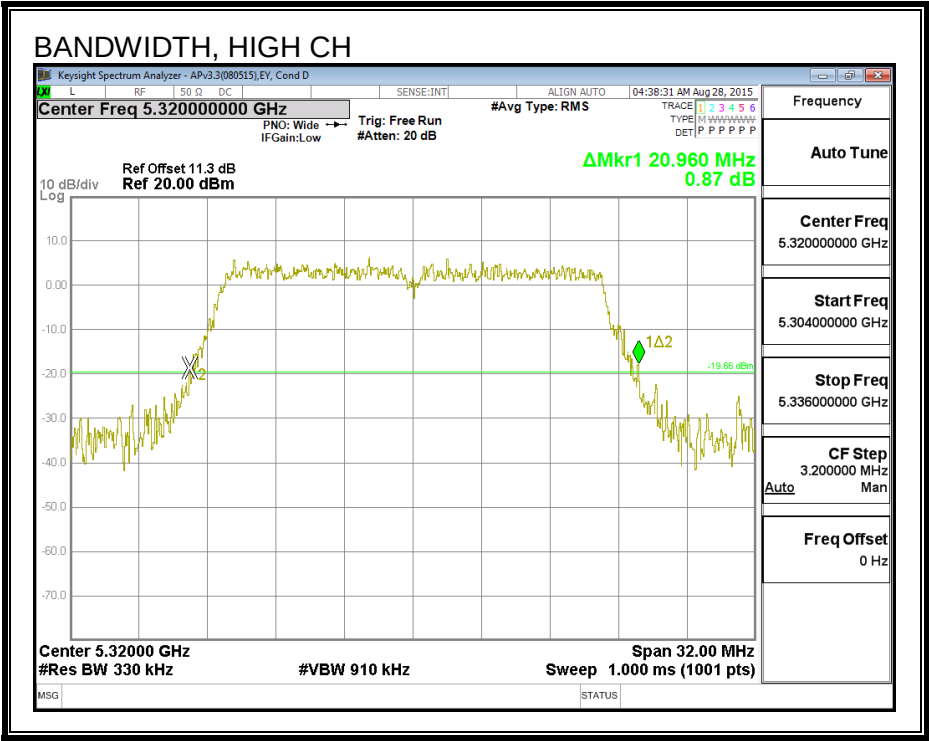

8.4.2. 99% BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5260	17.729
Mid	5300	17.783
High	5320	17.891

99% BANDWIDTH

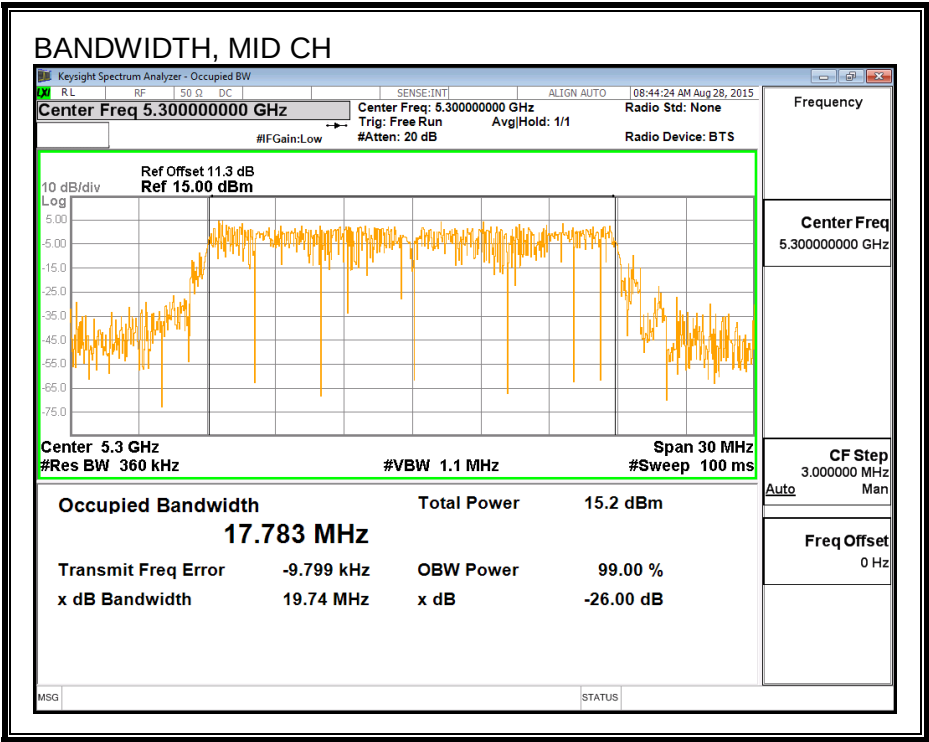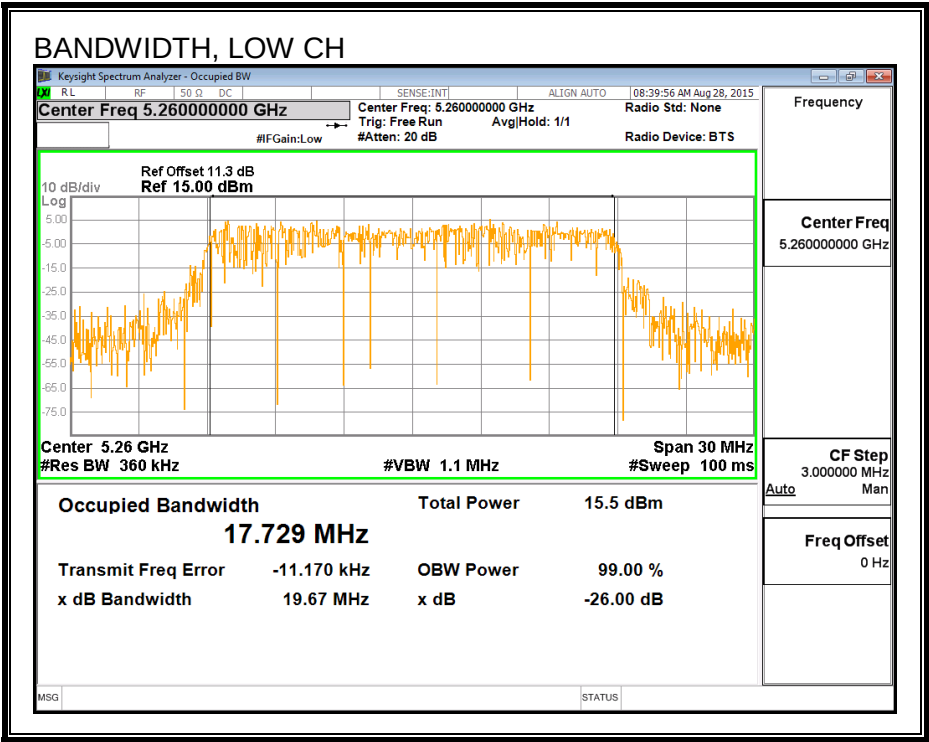

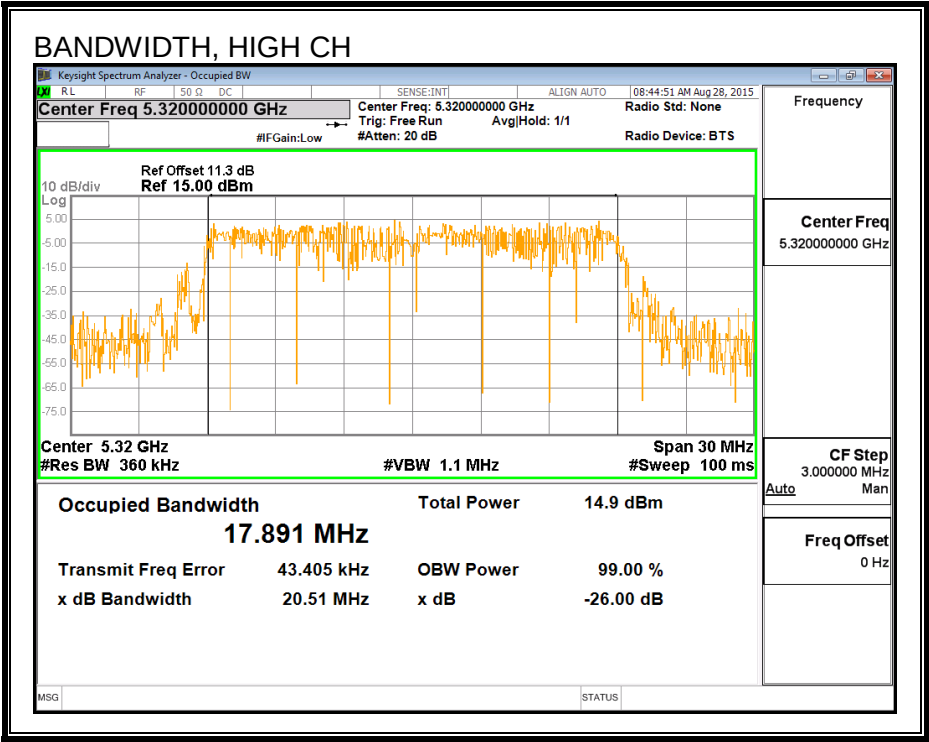

8.4.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

Channel	Frequency (MHz)	Power (dBm)
Low	5260	17.46
Mid	5300	17.50
High	5320	17.43

8.4.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26–dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5260	20.67	17.729	-5.22	23.49	11.00
Mid	5300	21.22	17.783	-5.22	23.50	11.00
High	5320	20.96	17.891	-5.22	23.53	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--



Output Power Results


Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	17.46	17.46	23.49	-6.03
Mid	5300	17.50	17.50	23.50	-6.00
High	5320	17.43	17.43	23.53	-6.10

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5260	6.45	6.45	11.00	-4.55
Mid	5300	6.52	6.52	11.00	-4.49
High	5320	6.40	6.40	11.00	-4.60

PSD

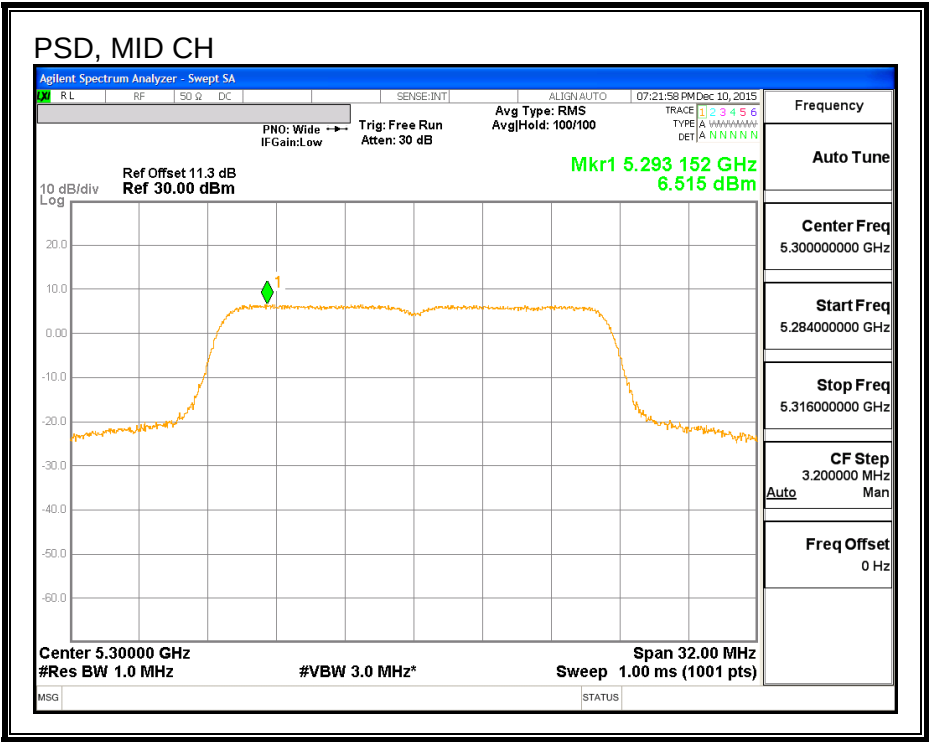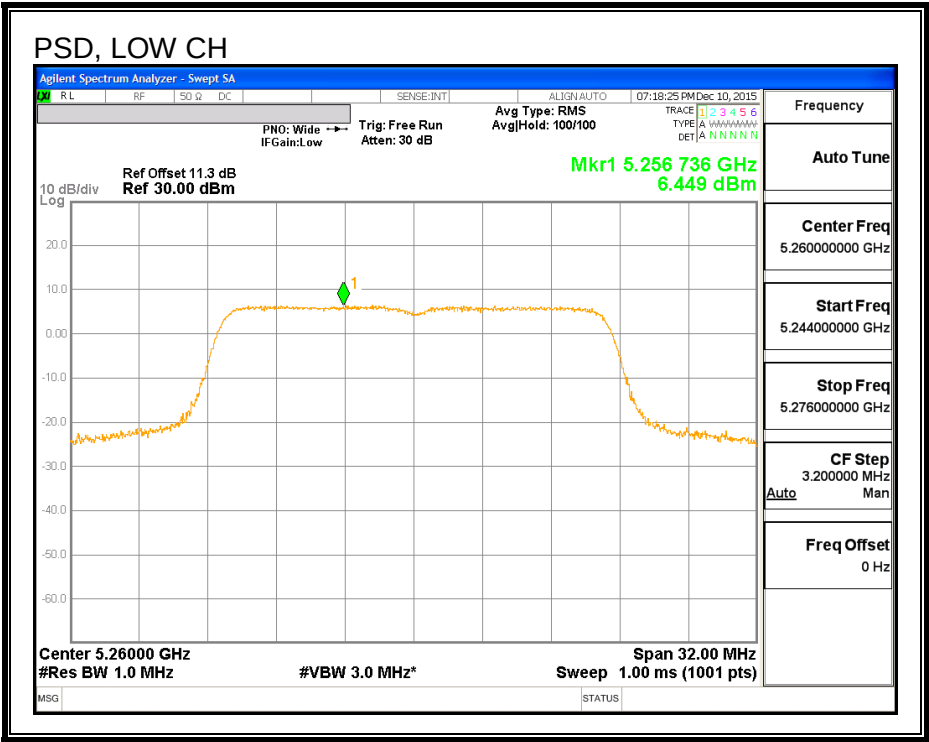

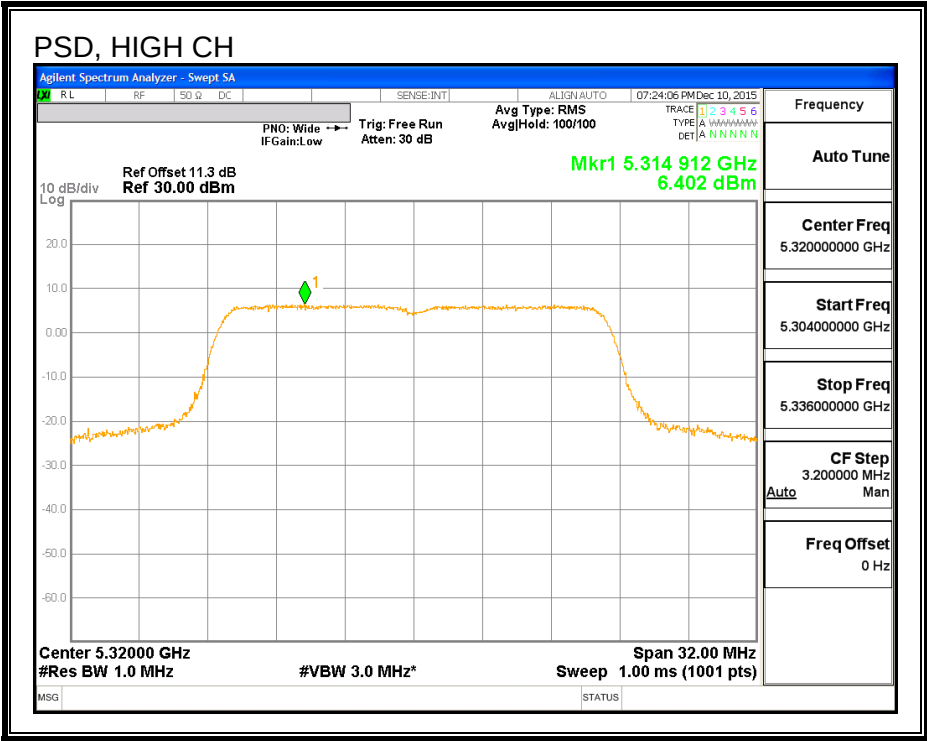

8.5. 802.11n HT40 CHAIN 0 MODE IN THE 5.3 GHz BAND

8.5.1. 26 dB BANDWIDTH



LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5270	39.840
High	5310	40.138

26 dB BANDWIDTH

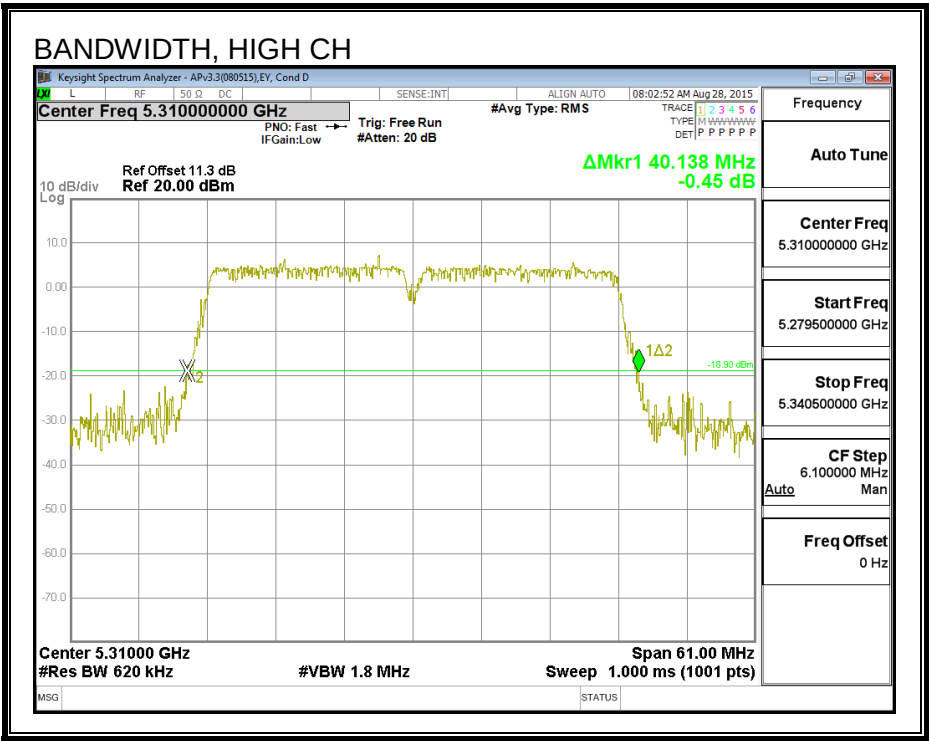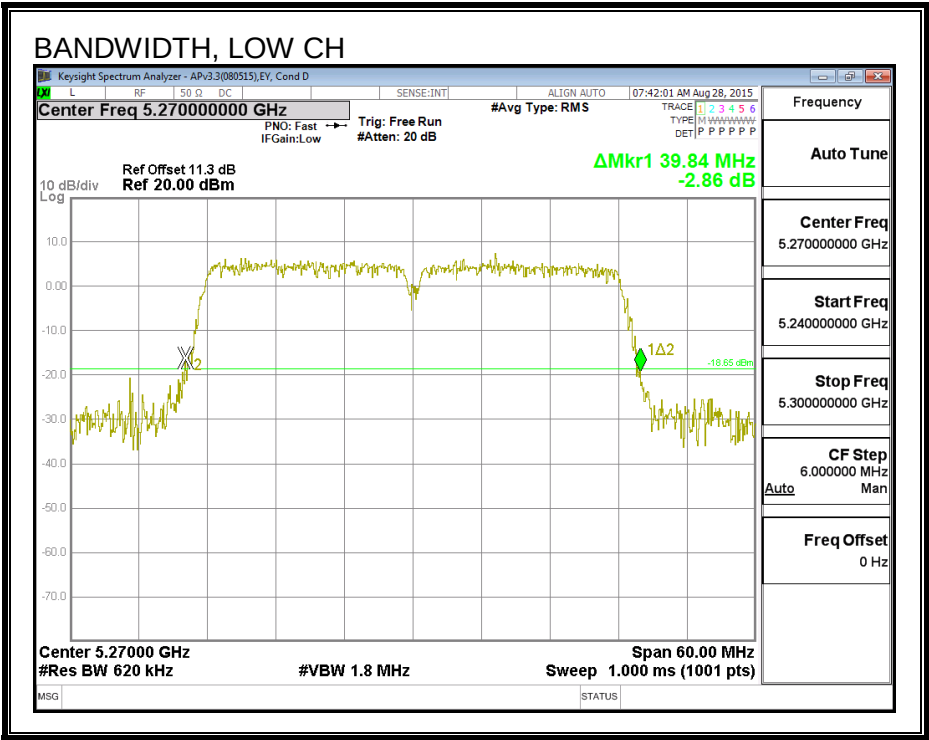

8.5.2. 99% BANDWIDTH



LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5270	36.425
High	5310	36.239

99% BANDWIDTH

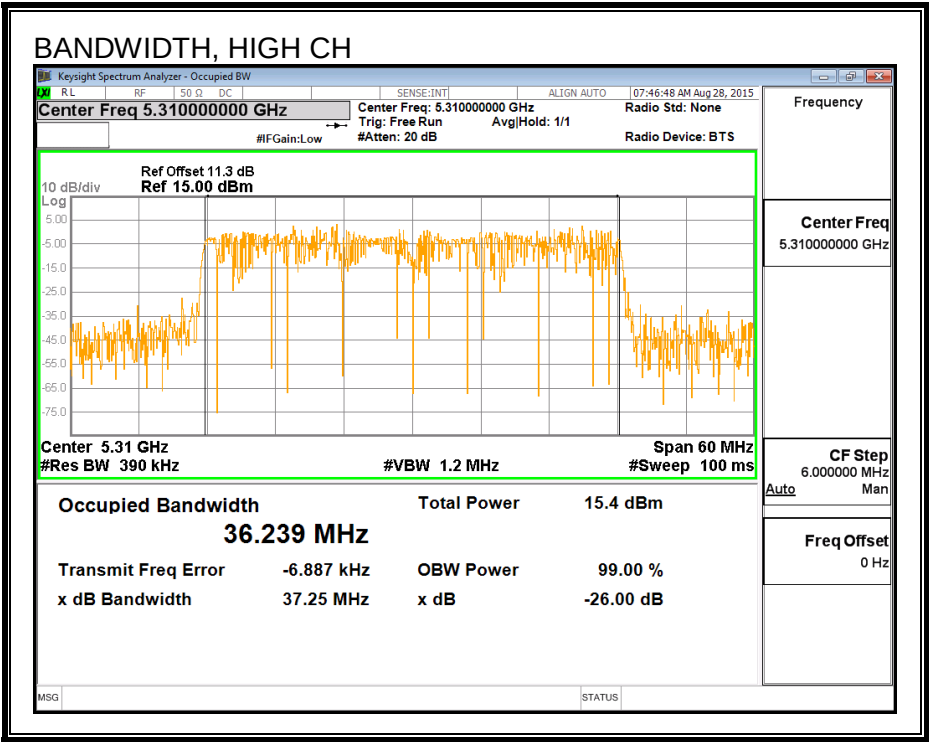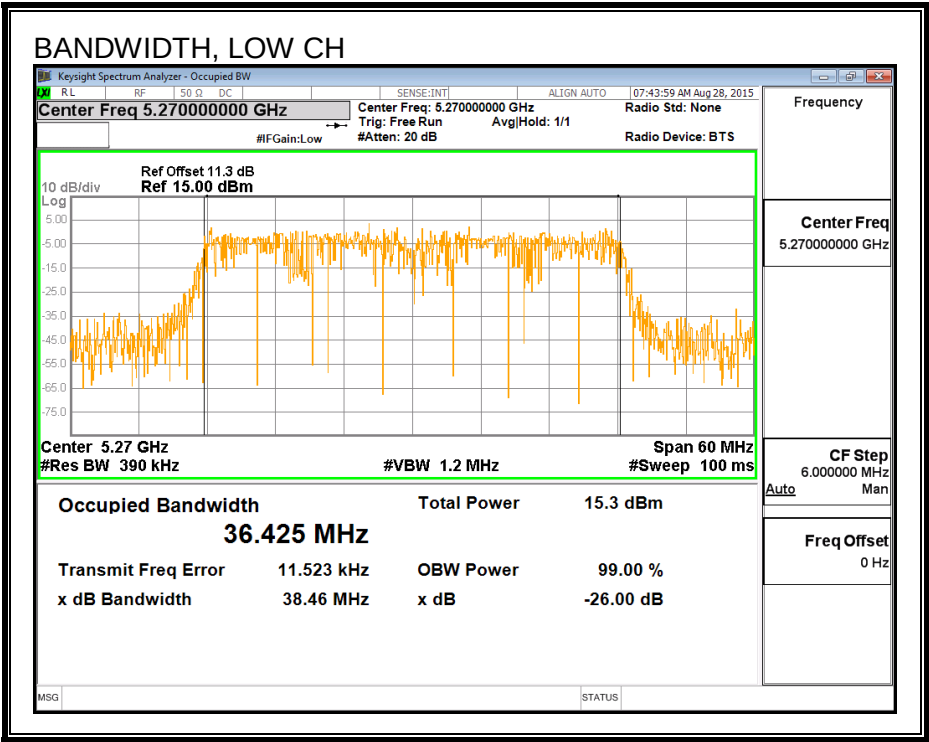

8.5.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

Channel	Frequency (MHz)	Power (dBm)
Low	5270	17.46
High	5310	15.89

8.5.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26–dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5270	39.84	36.425	-5.22	24.00	11.00
High	5310	40.14	36.239	-5.22	24.00	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--



Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5270	17.46	17.46	24.00	-6.54
High	5310	15.89	15.89	24.00	-8.11

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5270	3.78	3.78	11.00	-7.23
High	5310	2.56	2.56	11.00	-8.44

PSD

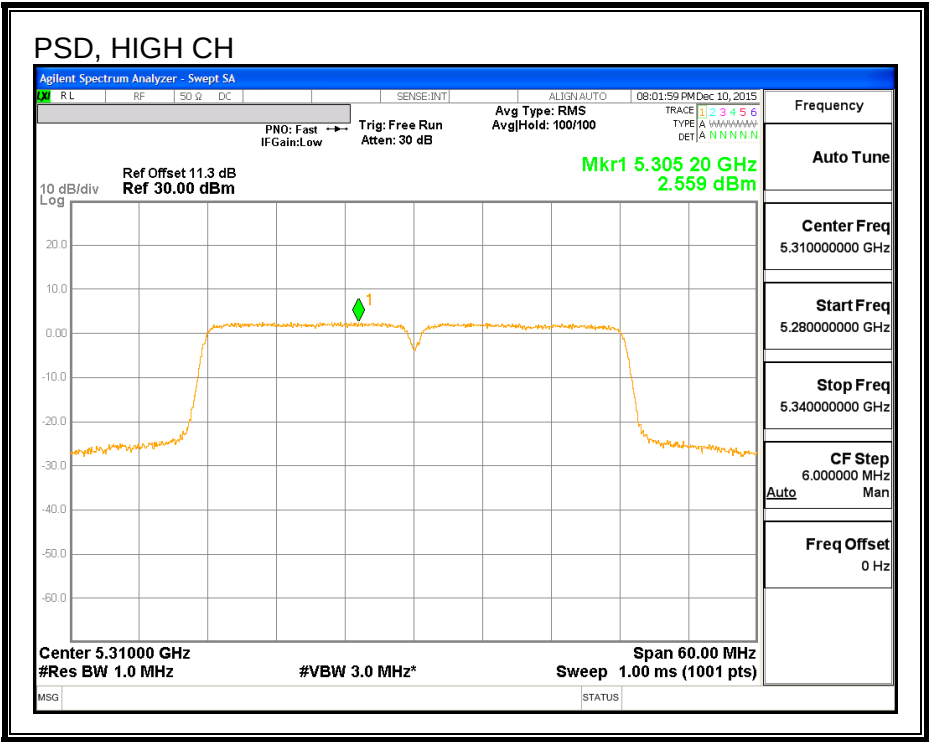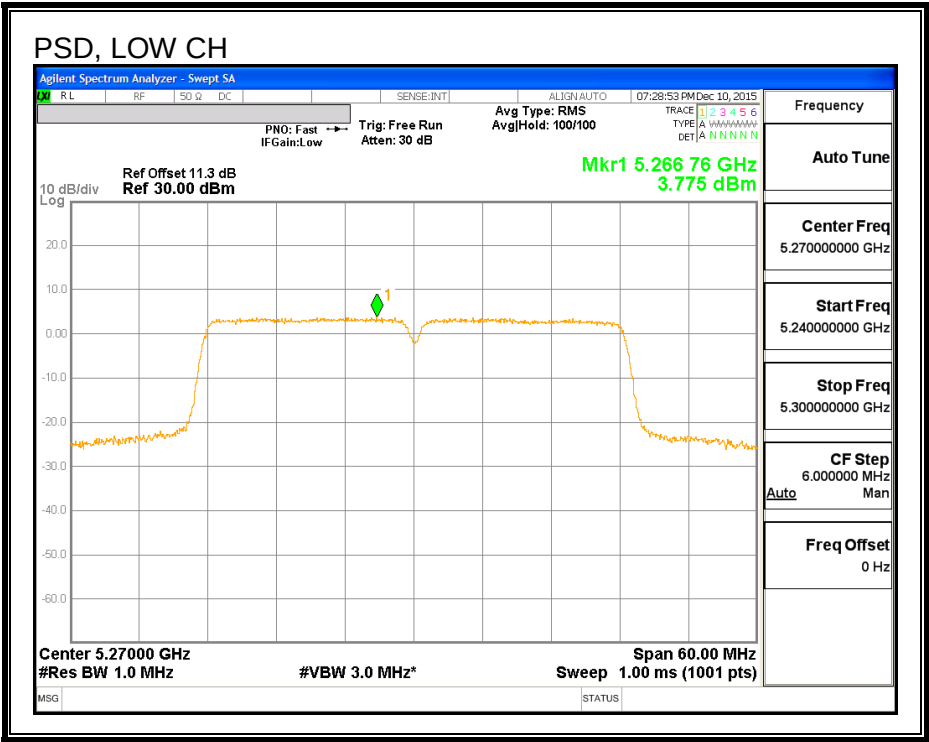

8.6. 802.11ac VHT80 CHAIN 0 MODE IN THE 5.3 GHz BAND

8.6.1. 26 dB BANDWIDTH


LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Mid	5290	81.80

26 dB BANDWIDTH

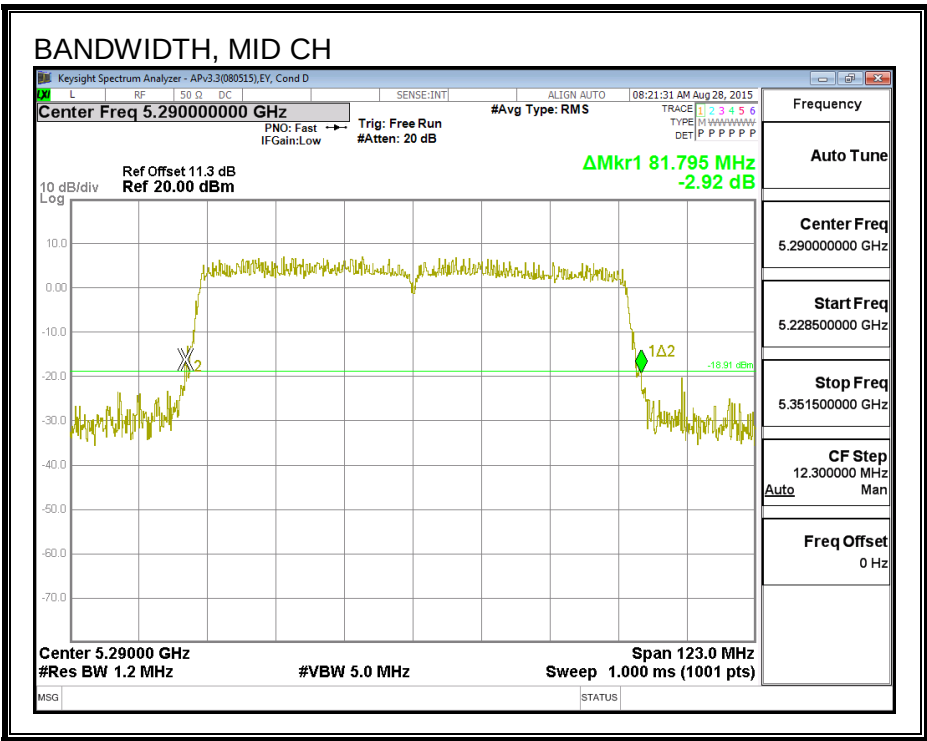

8.6.2. 99% BANDWIDTH


LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Mid	5290	76.087

99% BANDWIDTH

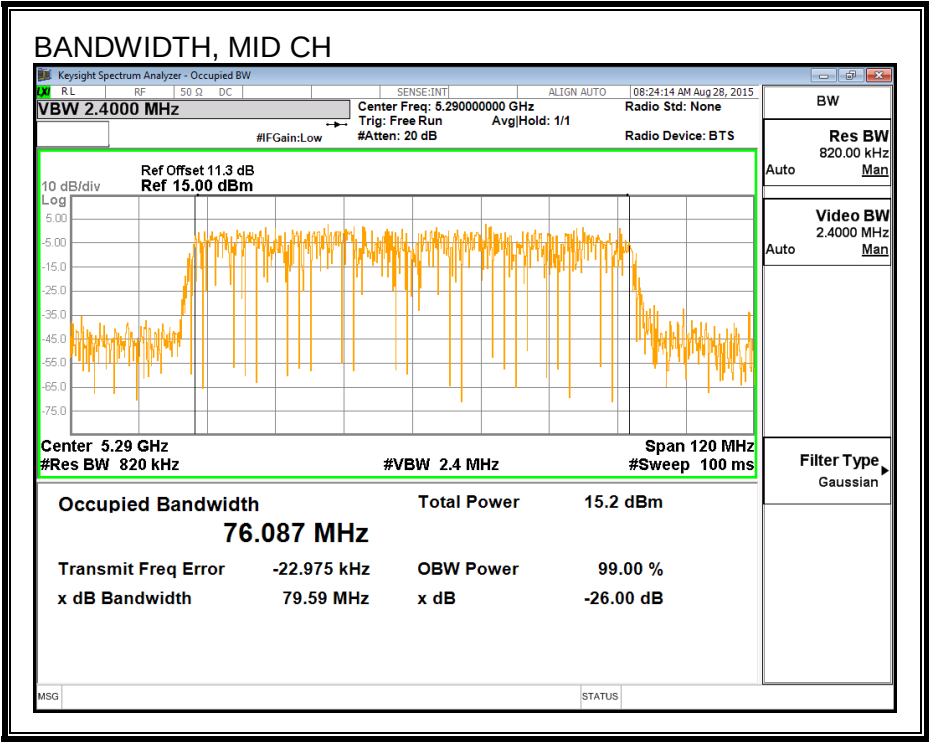

8.6.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

Channel	Frequency (MHz)	Power (dBm)
Mid	5290	15.50

8.6.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26–dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Mid	5290	81.80	76.087	-5.22	24.00	11.00

Duty Cycle CF (dB)	0.17	Included in Calculations of Corr'd PSD
--------------------	------	--


Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5290	15.50	15.50	24.00	-8.50

PPSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Mid	5290	-1.33	-1.16	11.00	-12.16

PSD

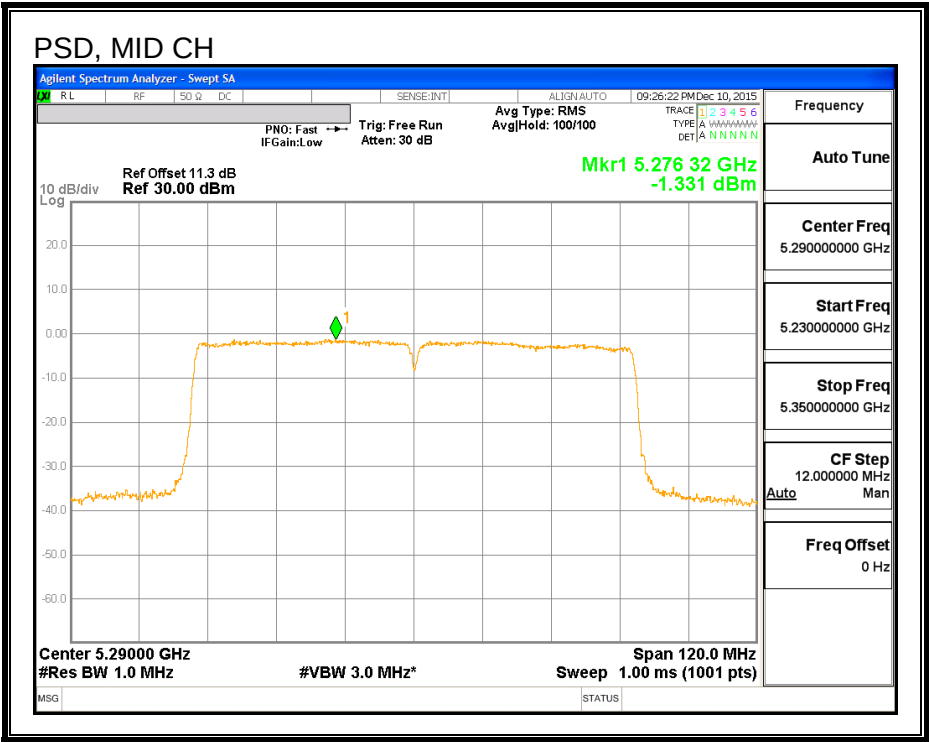

8.7. 802.11n HT20 CHAIN 0 MODE IN THE 5.6 GHz BAND

8.7.1. 99% BANDWIDTH



LIMITS



None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5500	17.741
Mid	5580	17.816
High	5700	17.702
144	5720	17.847

99% BANDWIDTH

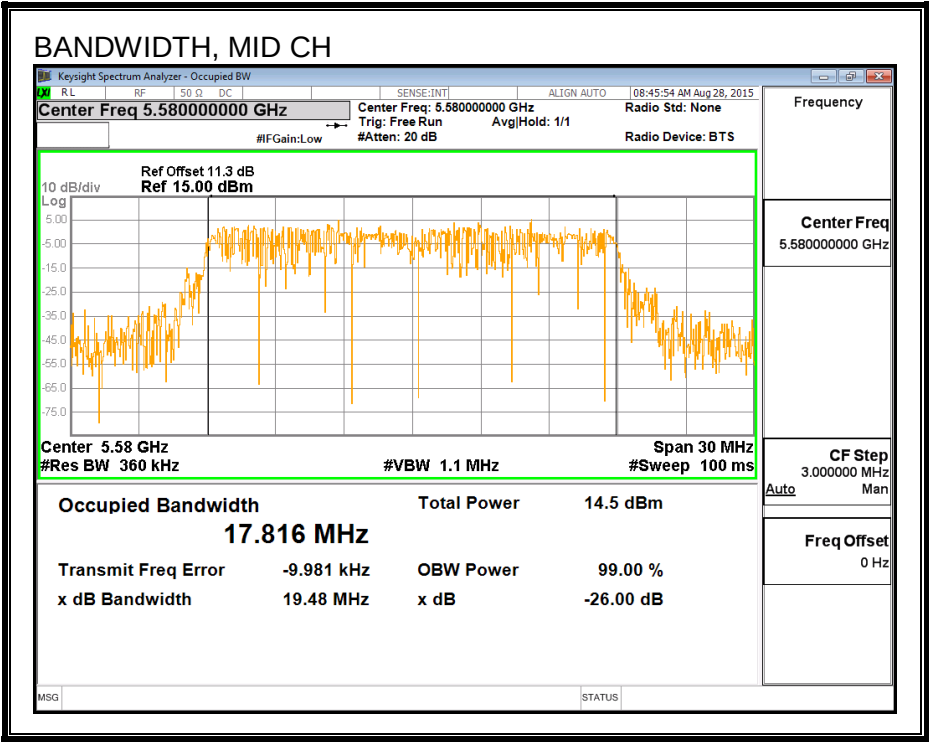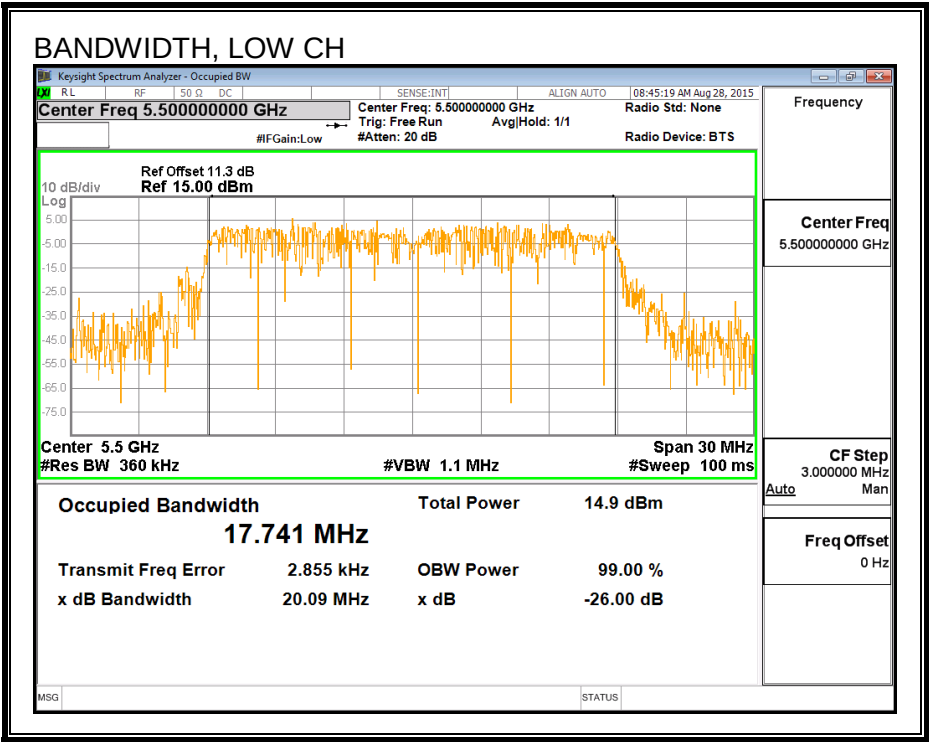

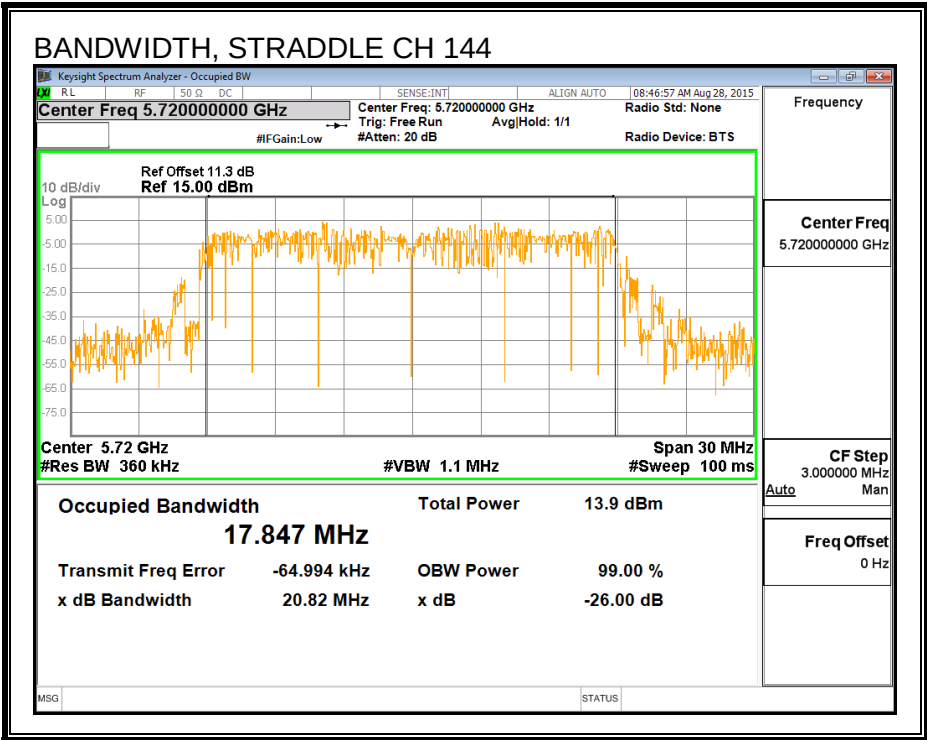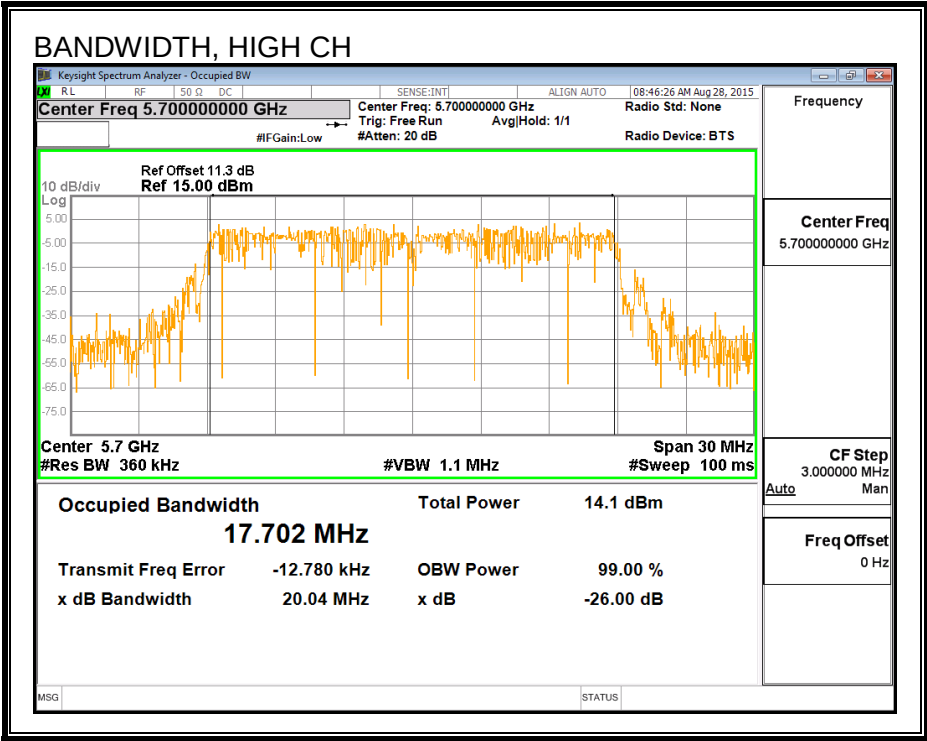

8.7.2. 26 dB BANDWIDTH



LIMITS



None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5500	21.248
Mid	5580	21.280
High	5700	20.800
144	5720	21.024

26 dB BANDWIDTH

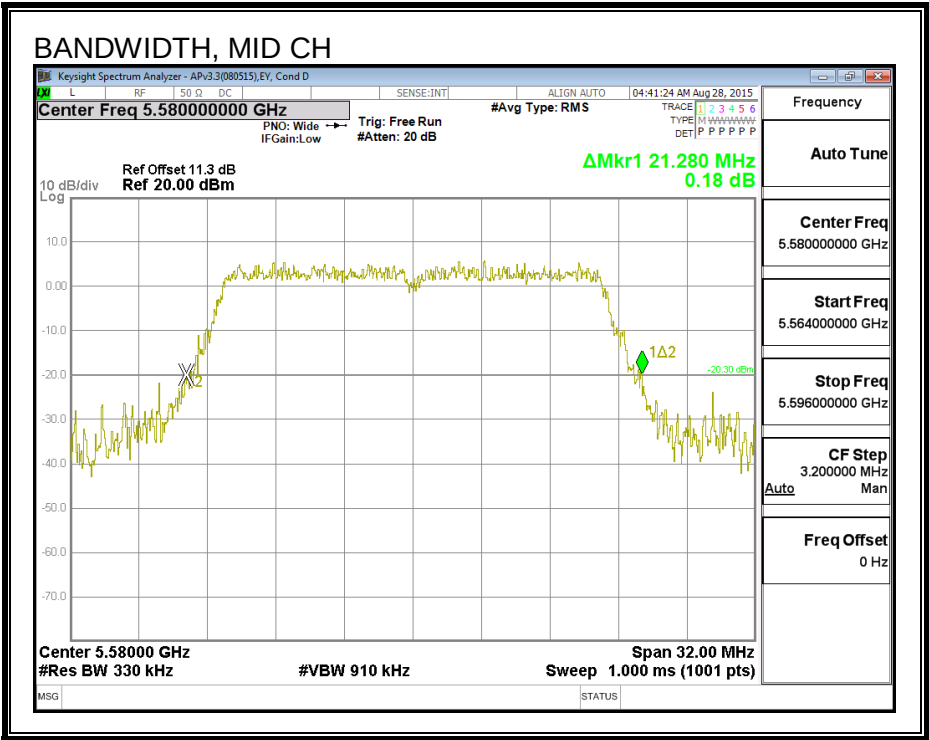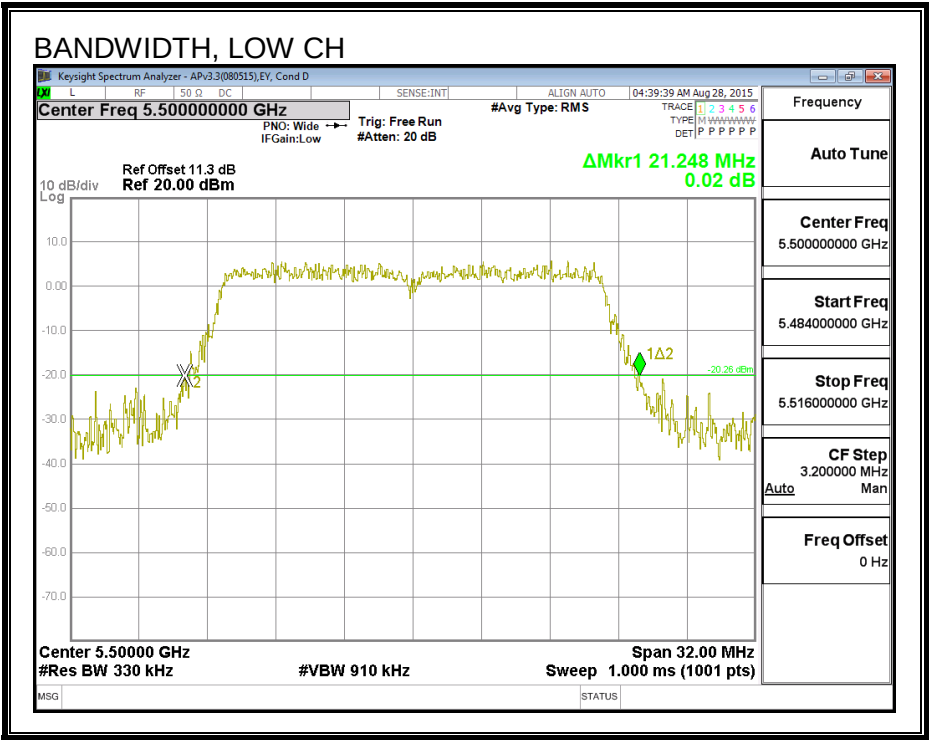

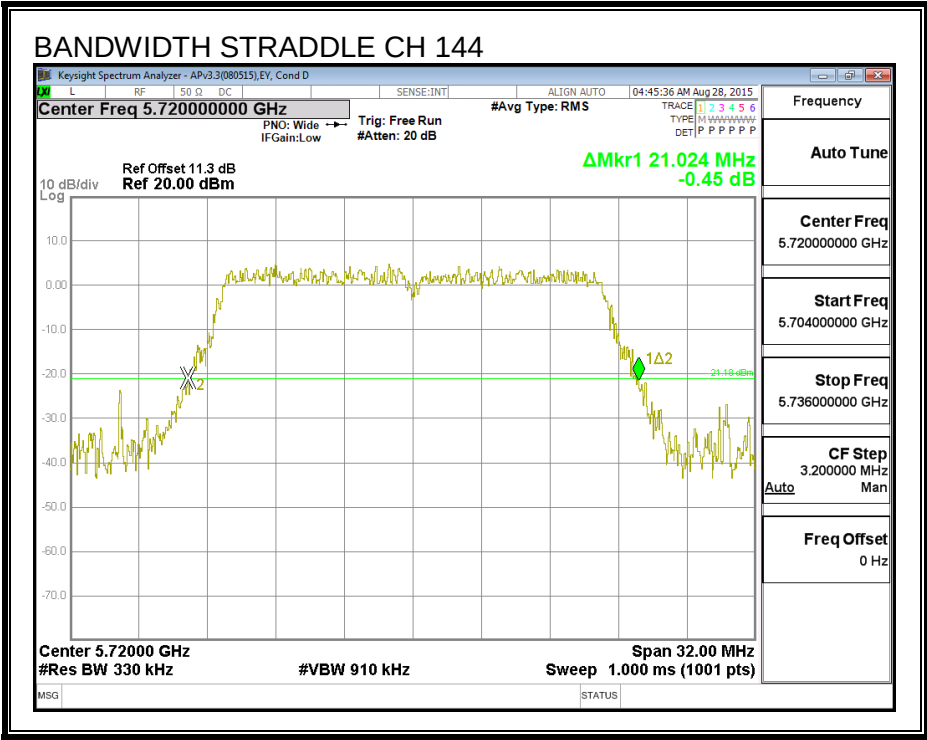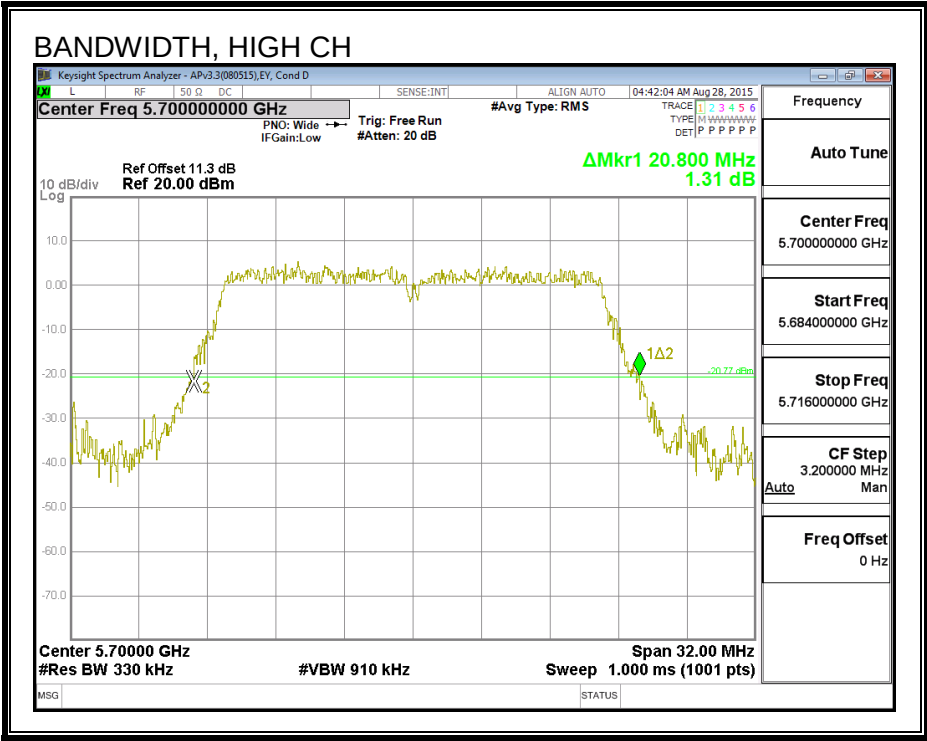

8.7.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

Channel	Frequency (MHz)	Power (dBm)
Low	5500	16.96
Mid	5580	16.93
High	5700	14.98
144	5720	16.46

8.7.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.47–5.725 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26–dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

Straddle channel power is measured using PXA spectrum analyzer, duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5500	21.25	17.741	-5.27	23.49	11.00
Mid	5580	21.28	17.816	-5.27	23.51	11.00
High	5700	20.80	17.702	-5.27	23.48	11.00
Duty Cycle CF (dB)		0.00	Included in Calculations of Corr'd PSD			



Output Power Results


Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5500	16.96	16.96	23.49	-6.53
Mid	5580	16.93	16.93	23.51	-6.58
High	5700	14.98	14.98	23.48	-8.50

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5500	6.48	6.48	11.00	-4.52
Mid	5580	6.45	6.45	11.00	-4.55
High	5700	3.69	3.69	11.00	-7.31

PSD

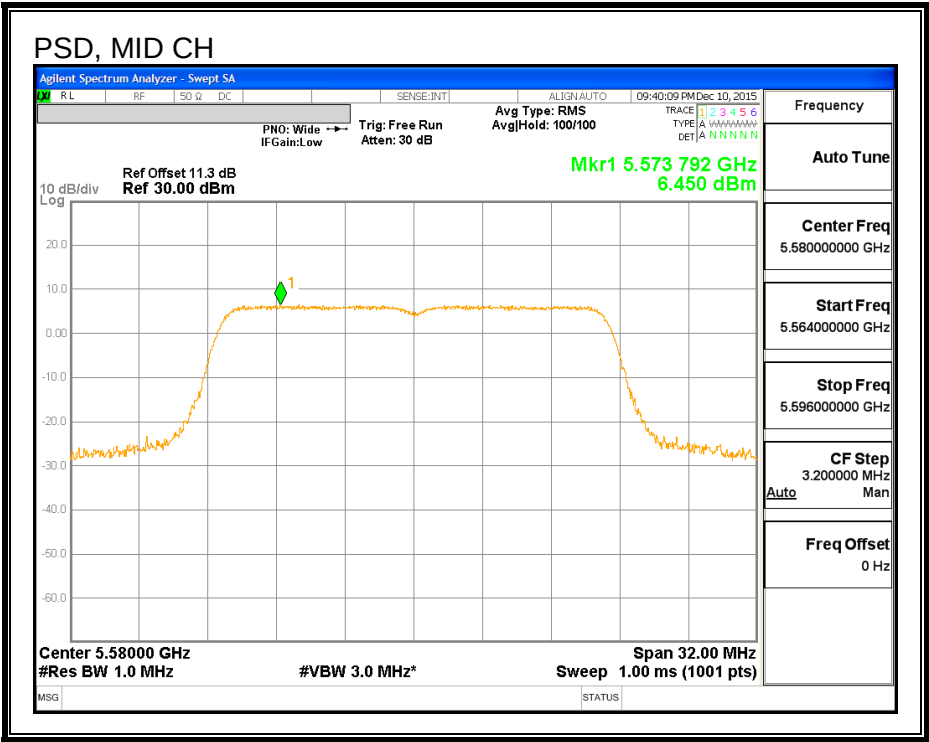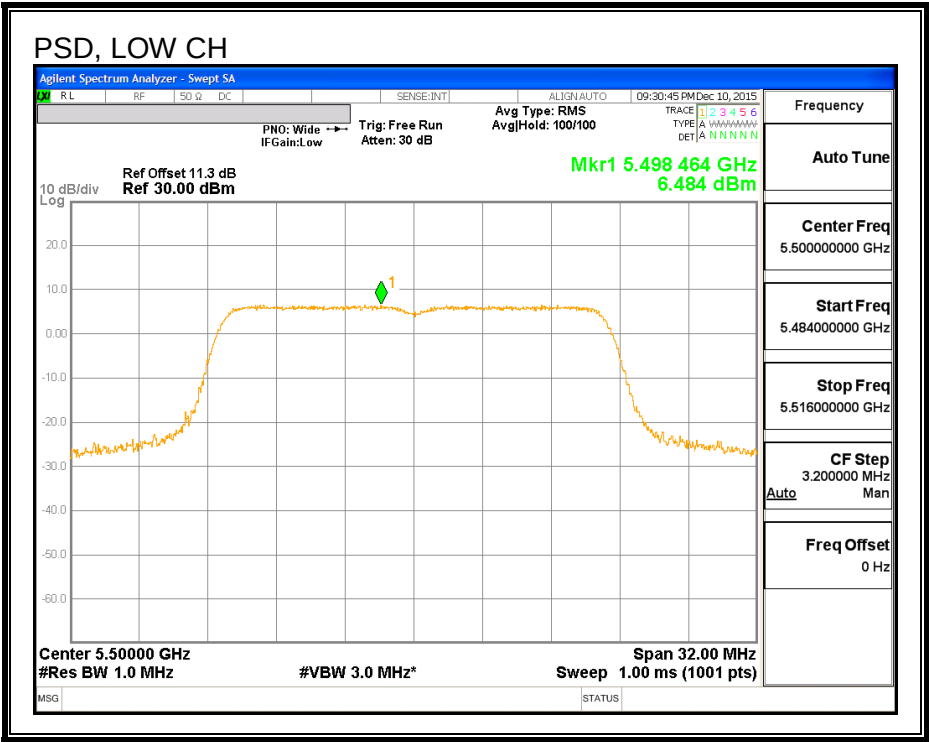

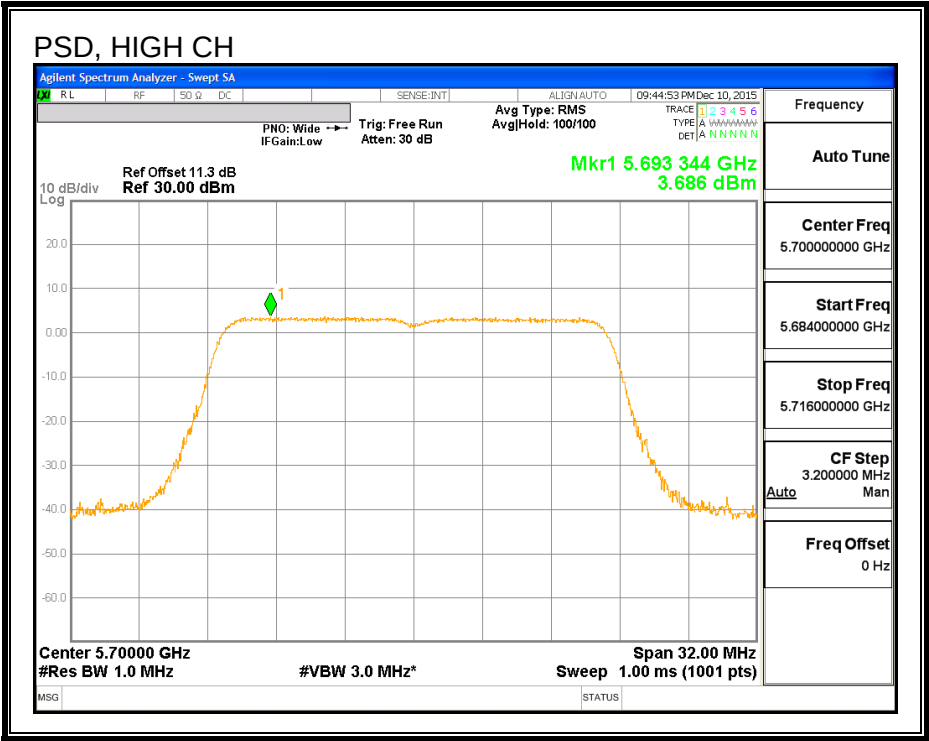

8.8. 802.11ac VHT20 STRADDLE CHANNEL 144 RESULTS

UNII-2C BAND

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
144	5720	15.51	-5.27	-5.27	22.91	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
144	5720	15.21	15.21	22.91	-7.70

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
144	5720	4.84	4.84	11.00	-6.16

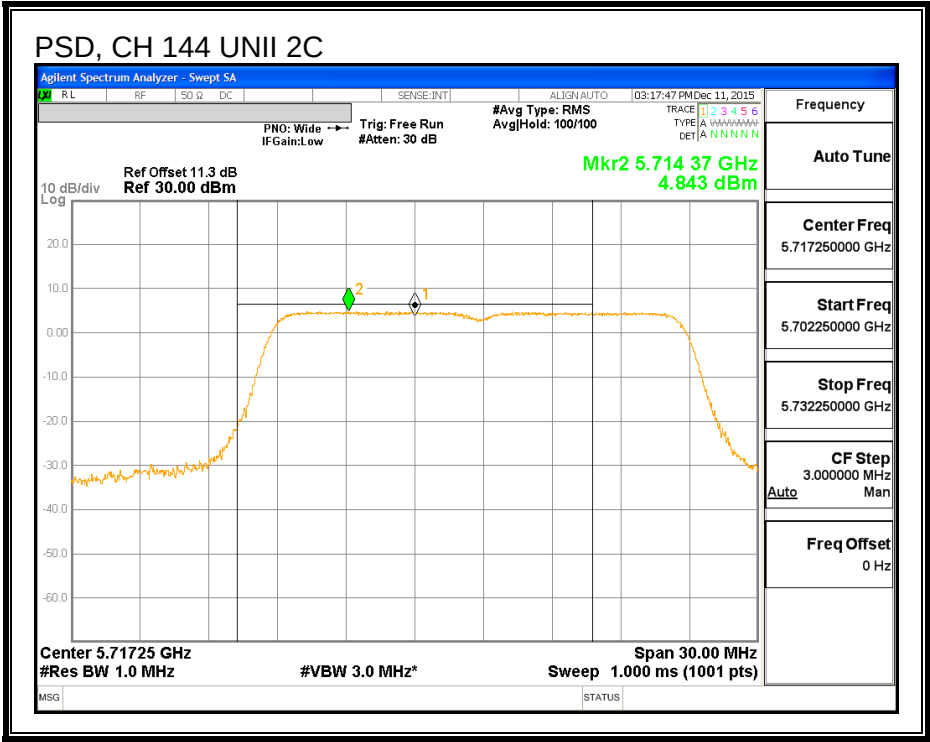

UNII-3 BAND

Antenna Gain and Limit

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
144	5720	5.51	-5.27	30.00	30.00



Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
144	5720	9.95	9.95	30.00	-20.05

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
144	5720	4.54	4.54	30.00	-25.47

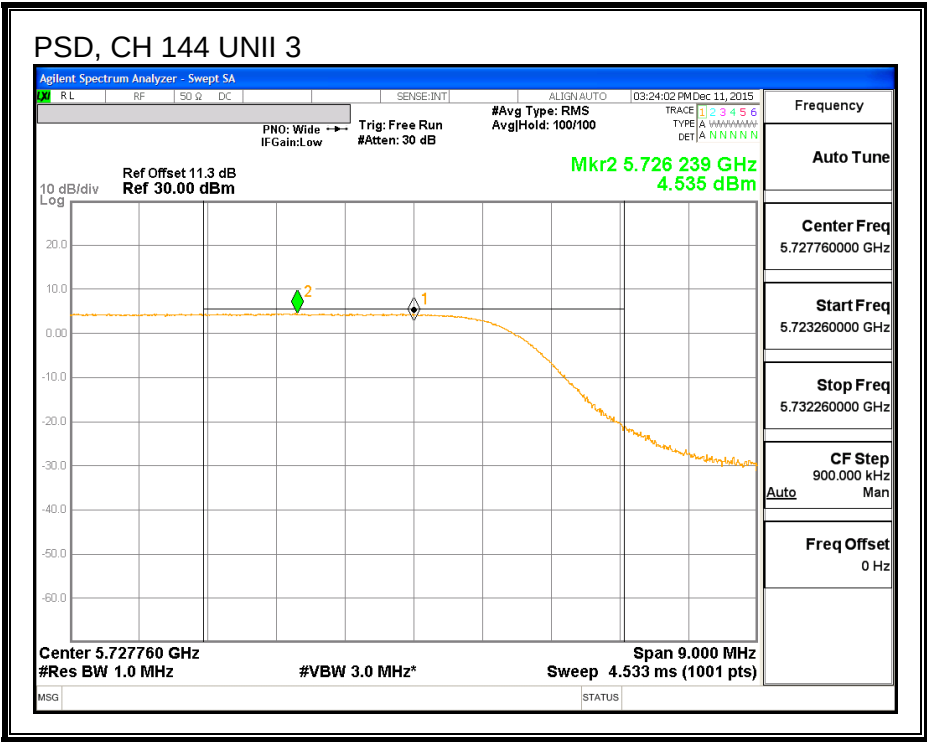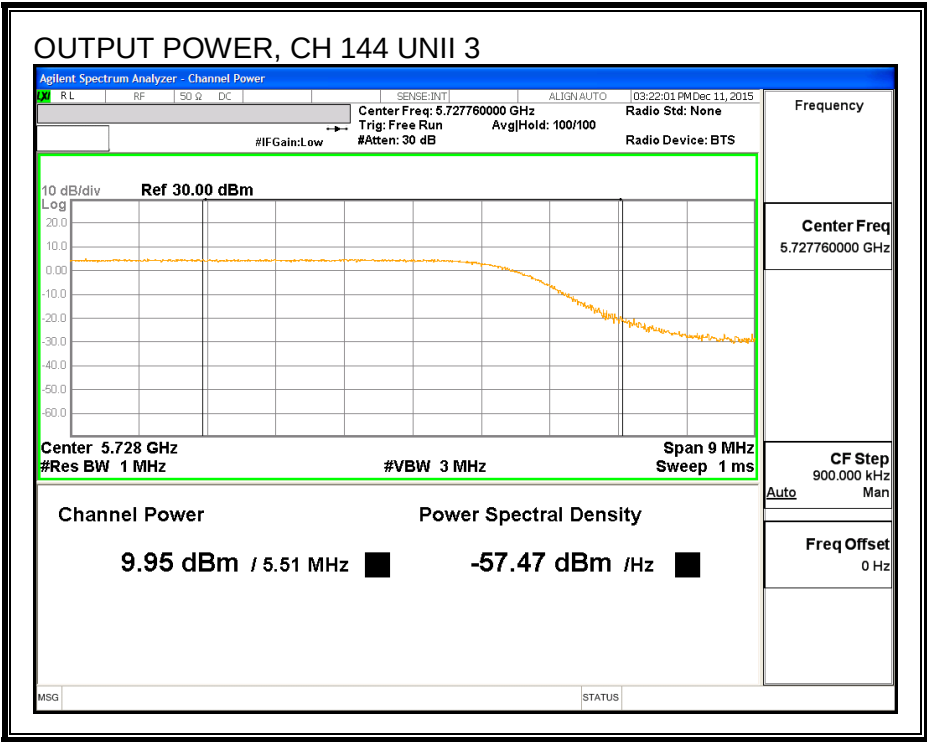

8.8.1. 6 dB BANDWIDTH

LIMITS


FCC §15.407 (e)

The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)
144	5720	3.90

6 dB BANDWIDTH

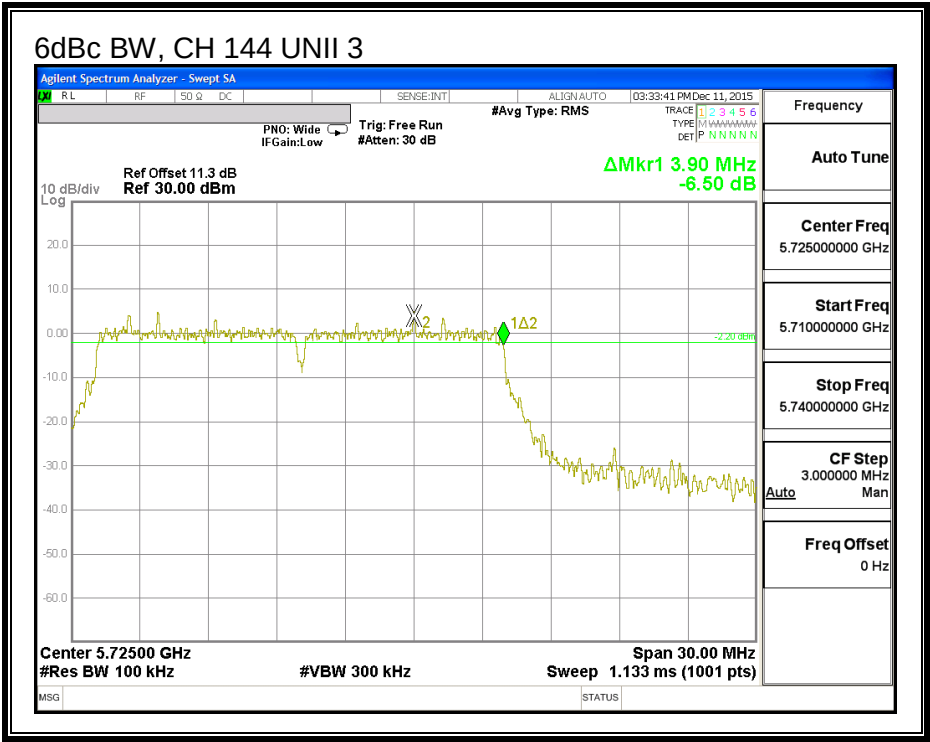

8.9. 802.11n HT40 CHAIN 0 MODE IN THE 5.6 GHz BAND

8.9.1. 26 dB BANDWIDTH



LIMITS



None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5510	40.077
Mid	5550	39.540
High	5670	39.900
142	5710	39.660

26 dB BANDWIDTH

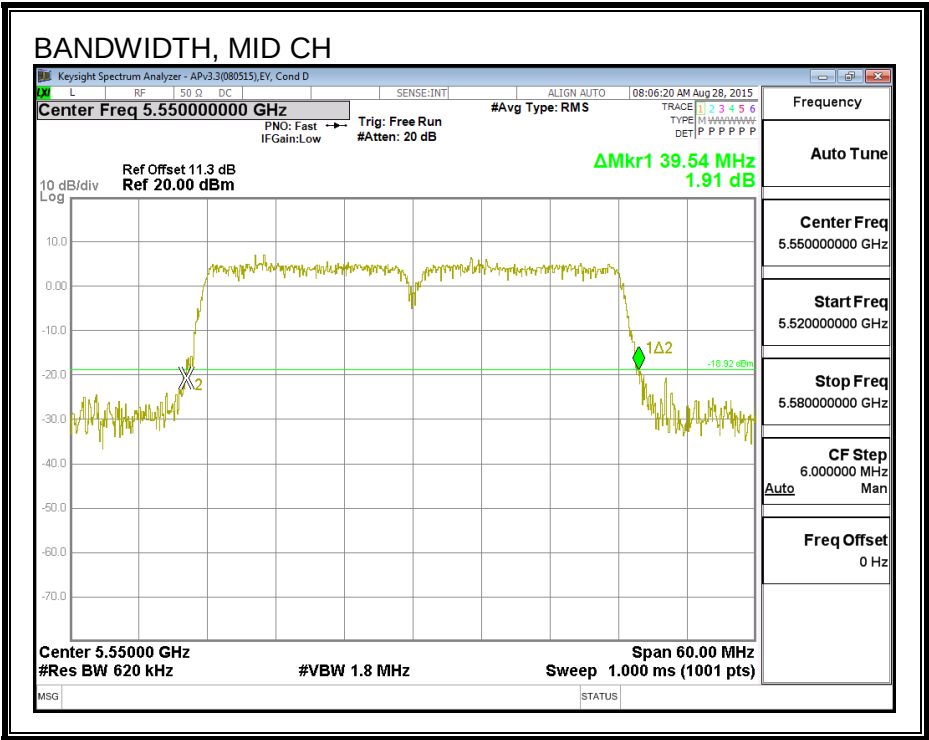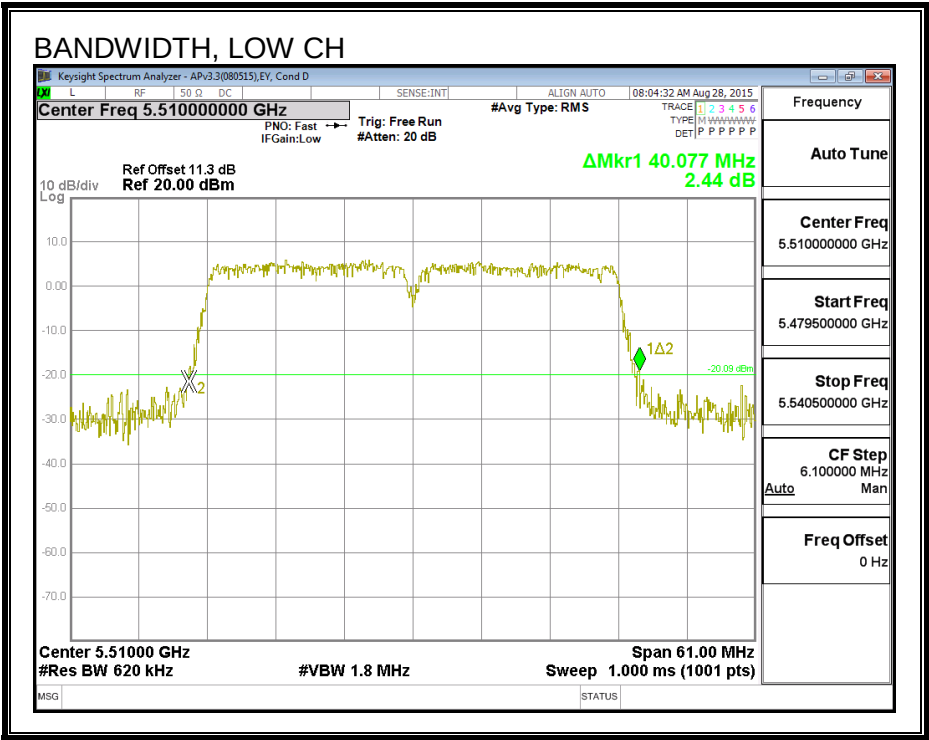

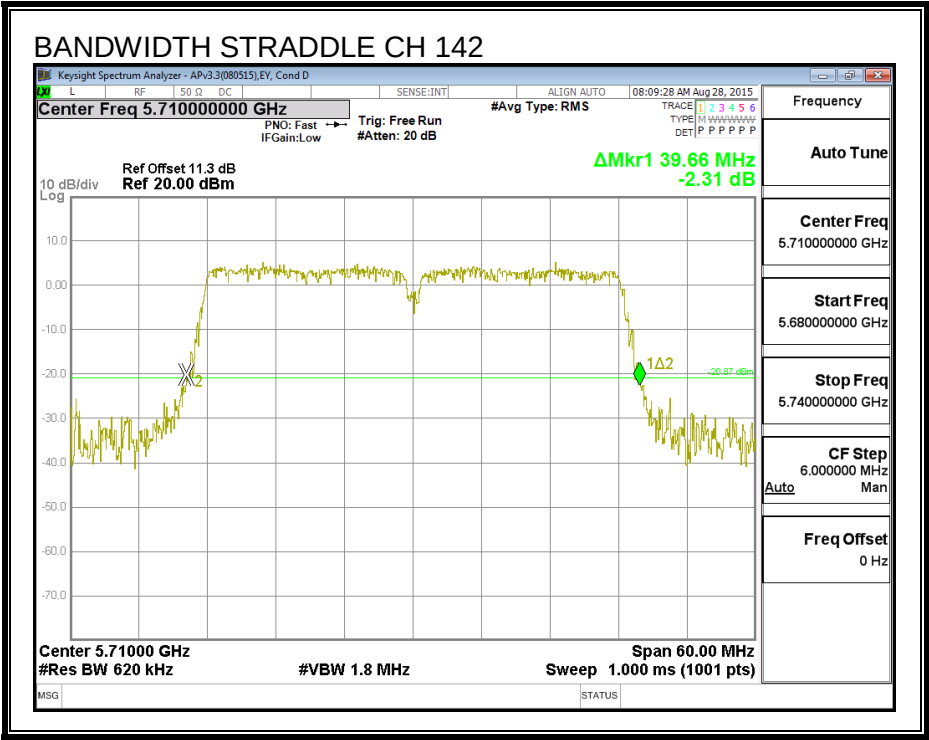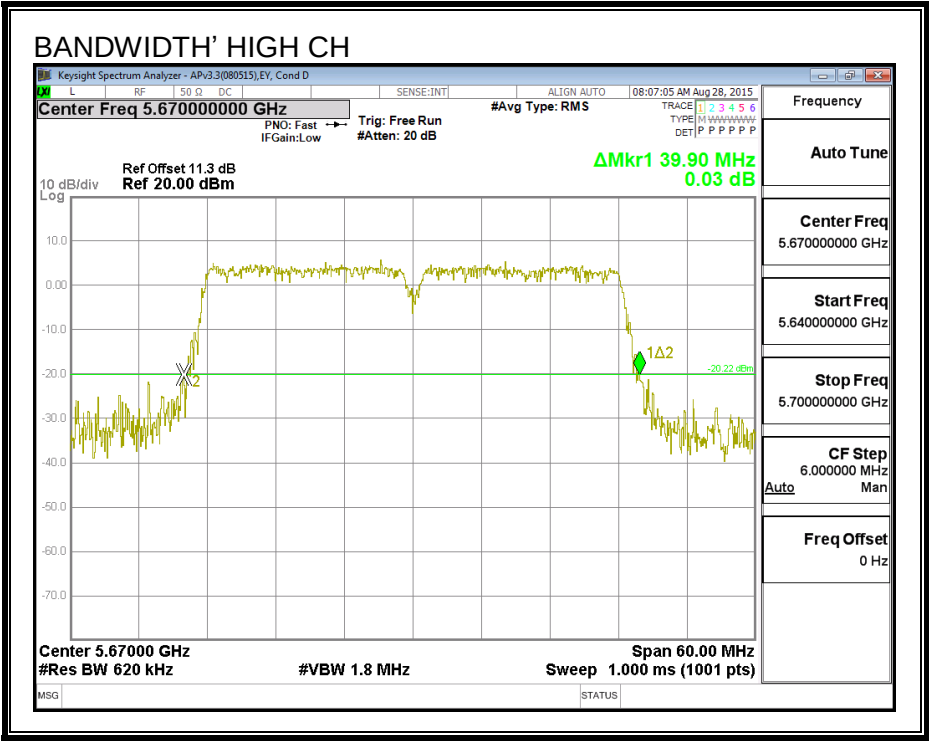

8.9.2. 99% BANDWIDTH



LIMITS



None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5510	36.240
Mid	5550	36.251
High	5670	36.209
142	5710	36.310

99% BANDWIDTH

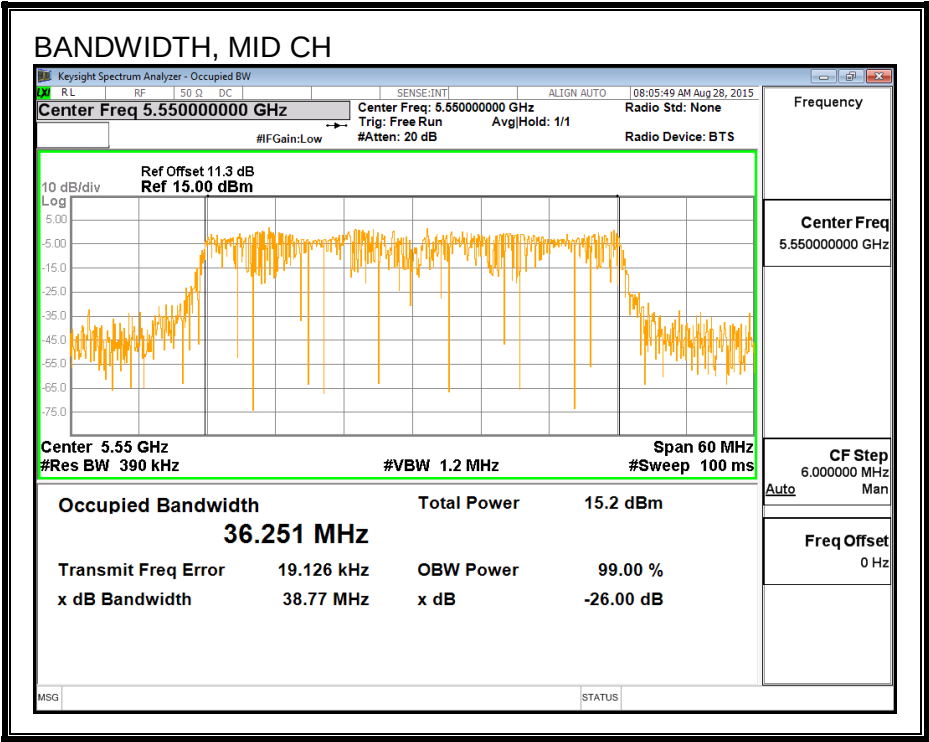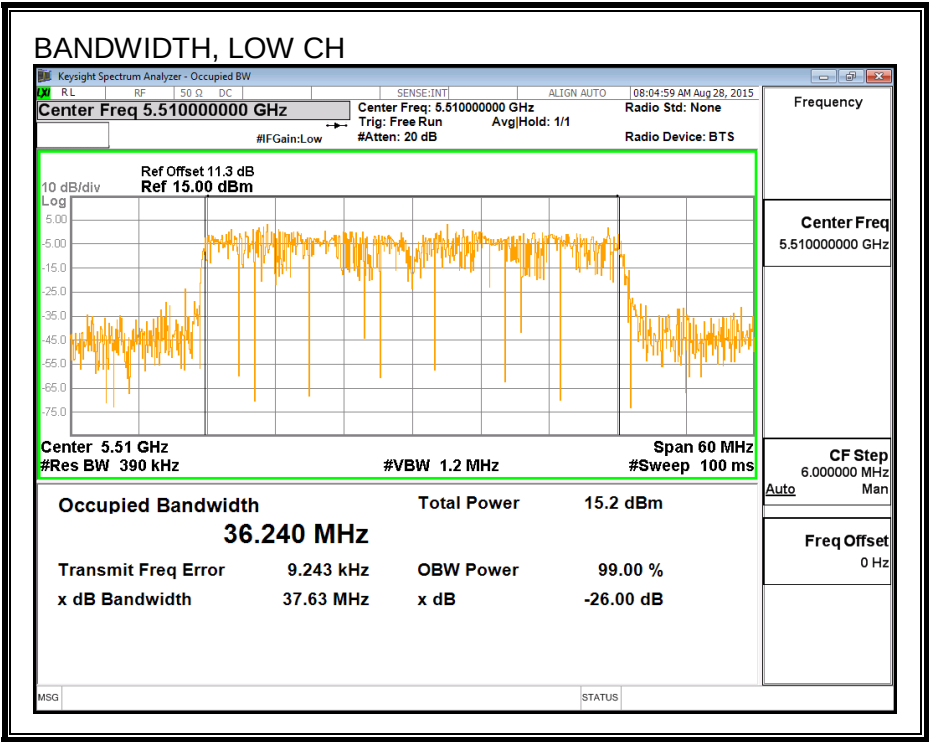

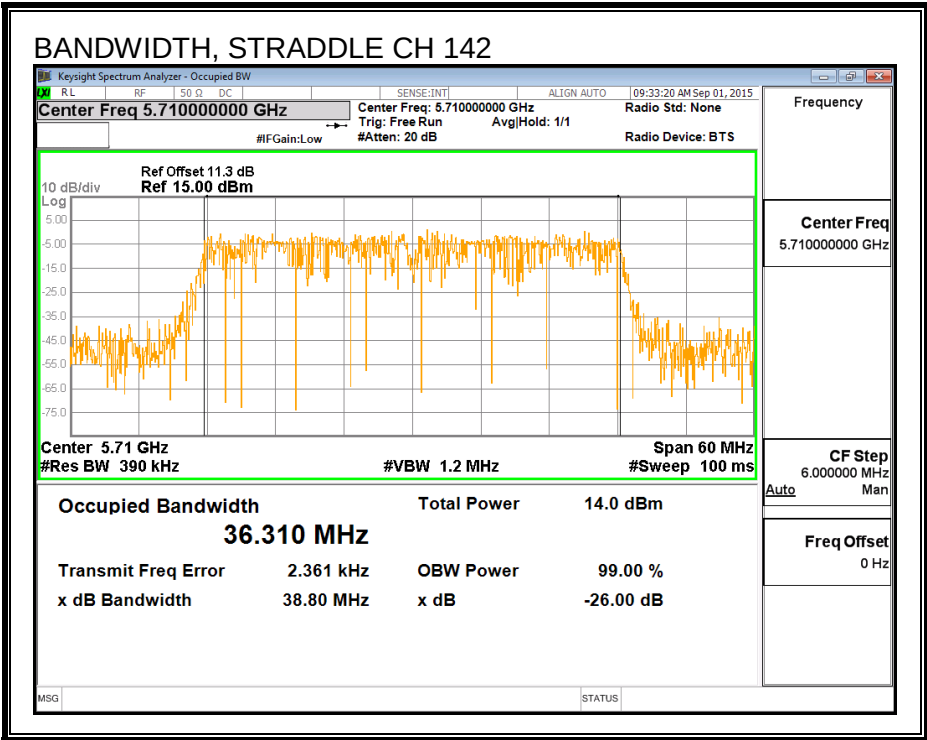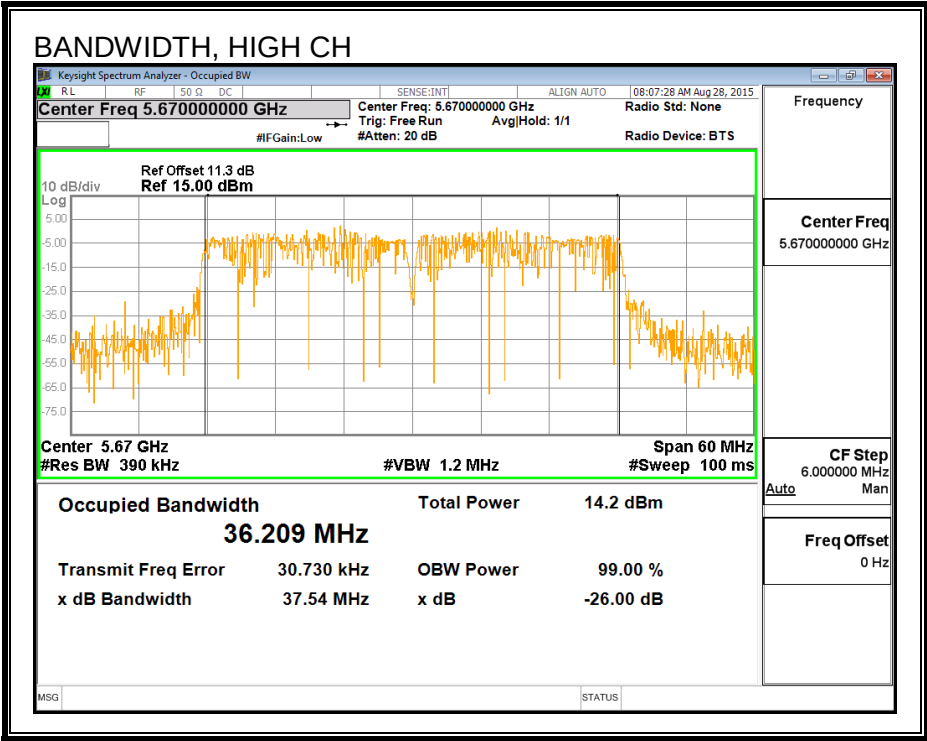

8.9.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

Channel	Frequency (MHz)	Power (dBm)
Low	5510	15.38
Mid	5550	16.92
High	5670	16.96
142	5710	16.92

8.9.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.47–5.725 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26-dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

Straddle channel power is measured using PXA spectrum analyzer, duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5510	40.08	36.240	-5.27	24.00	11.00
Mid	5550	39.54	36.251	-5.27	24.00	11.00
High	5670	39.90	36.209	-5.27	24.00	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--



Output Power Results


Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5510	15.38	15.38	24.00	-8.62
Mid	5550	16.92	16.92	24.00	-7.08
High	5670	16.96	16.96	24.00	-7.04

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5510	1.80	1.80	11.00	-9.20
Mid	5550	3.69	3.69	11.00	-7.31
High	5670	3.79	3.79	11.00	-7.21

PSD

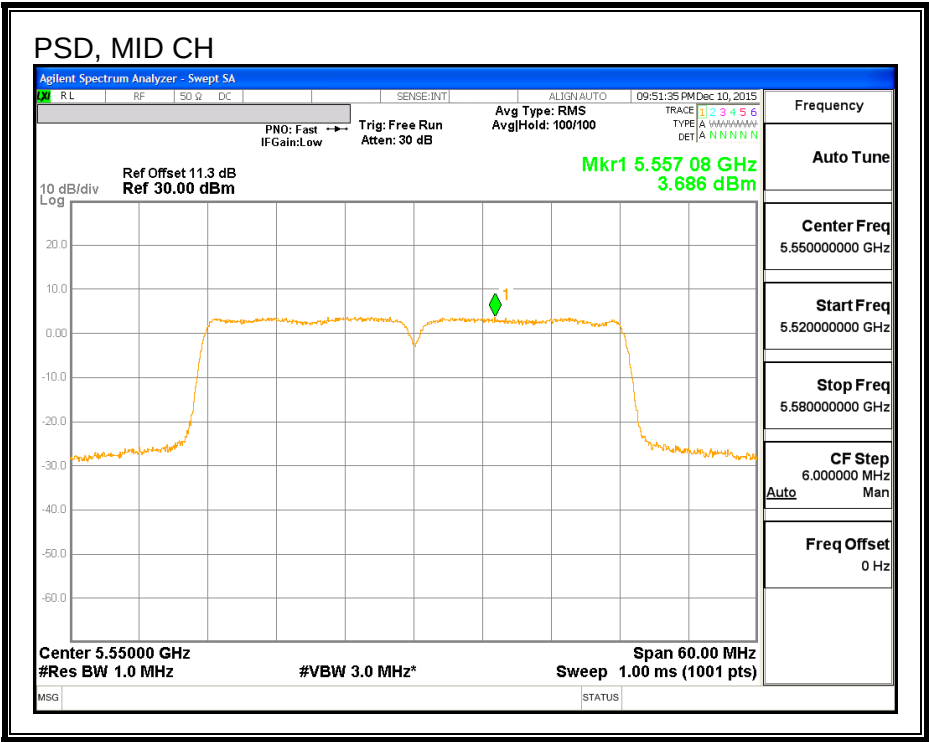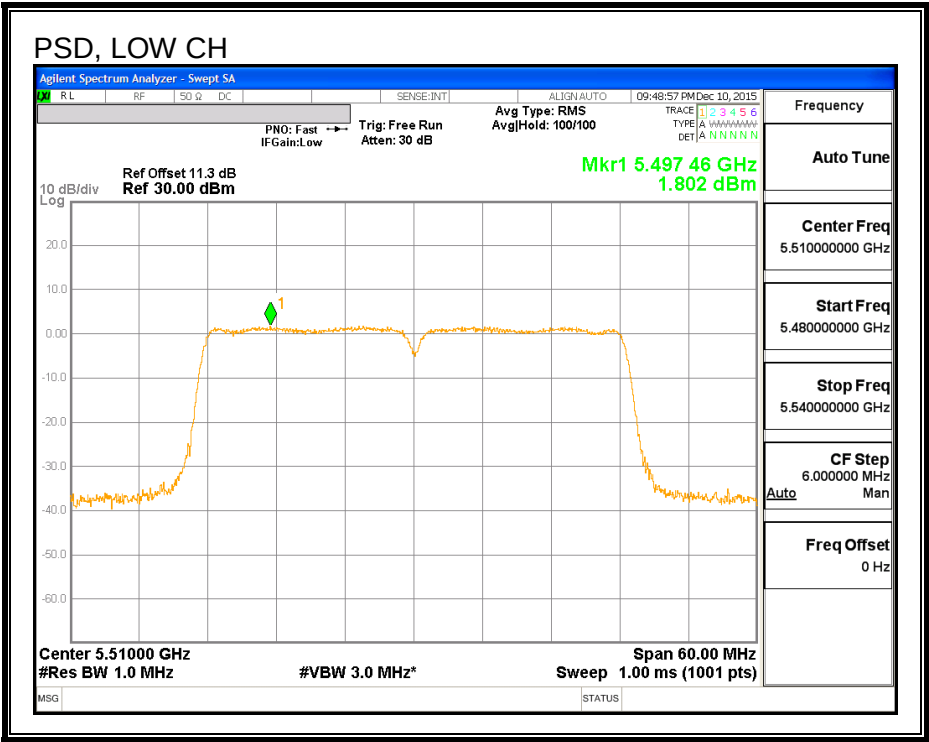

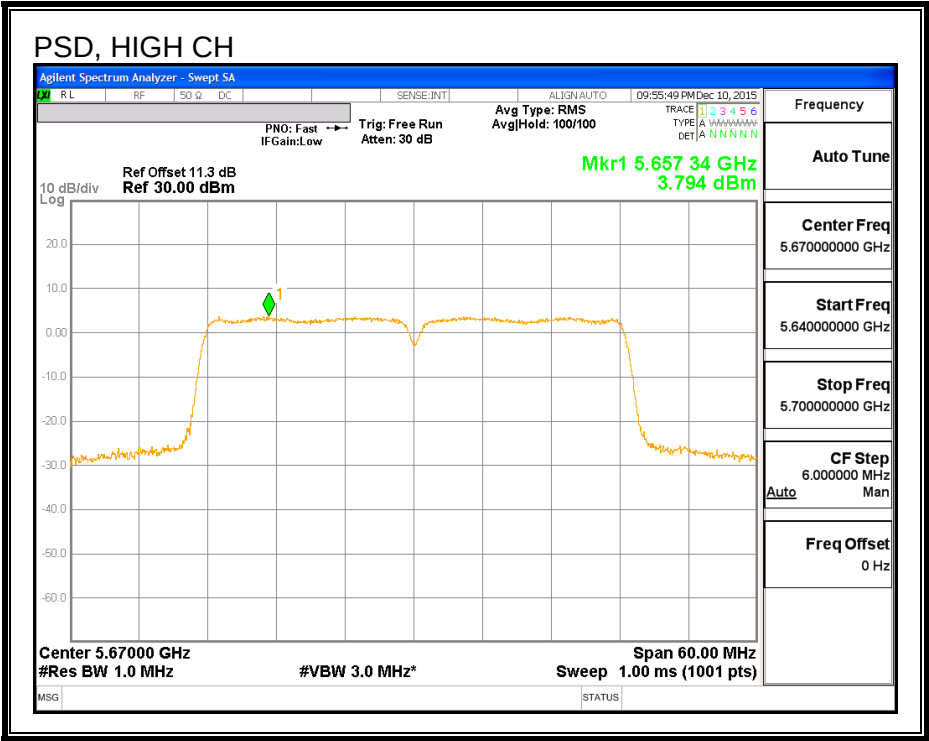

8.10. 802.11ac VHT40 STRADDLE CH 142 RESULTS

UNII-2C BAND

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
142	5710	34.83	-5.27	-5.27	24.00	11.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
142	5710	16.58	16.58	24.00	-7.42

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
142	5710	2.80	2.80	11.00	-8.20

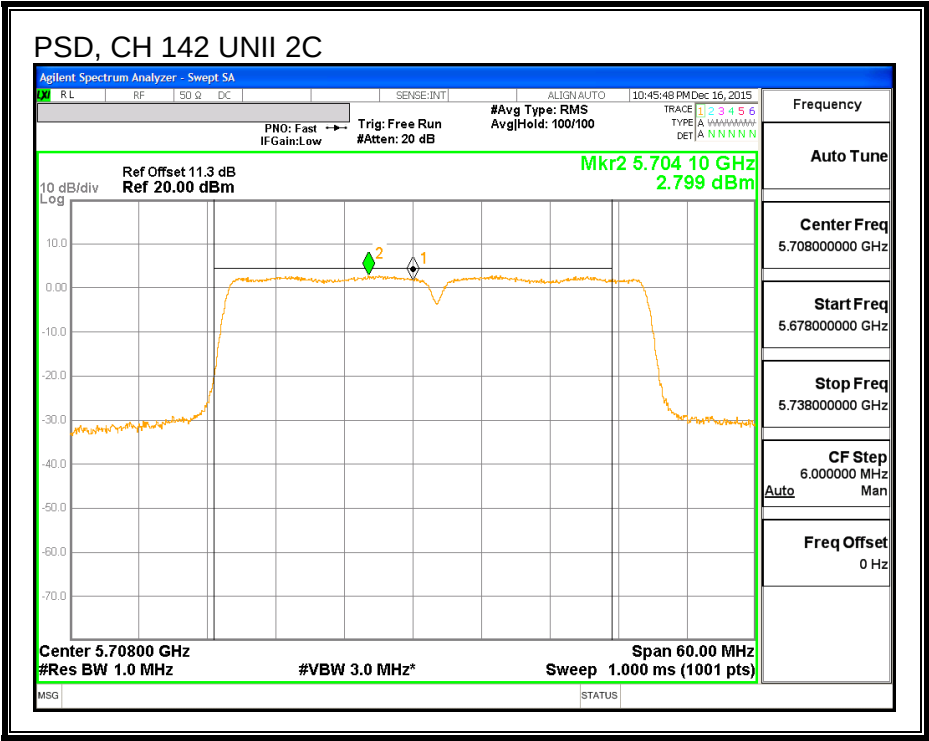

UNII-3 BAND

Antenna Gain and Limit

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
142	5710	4.83	-5.27	30.00	30.00



Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
142	5710	5.84	5.84	30.00	-24.16

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
142	5710	1.18	1.18	30.00	-28.83

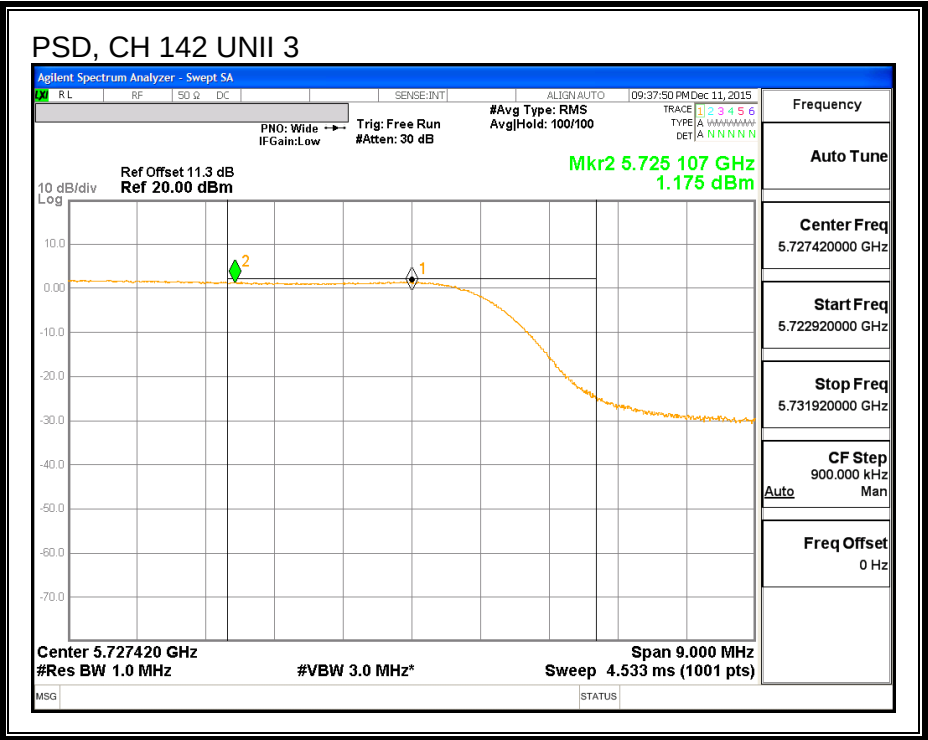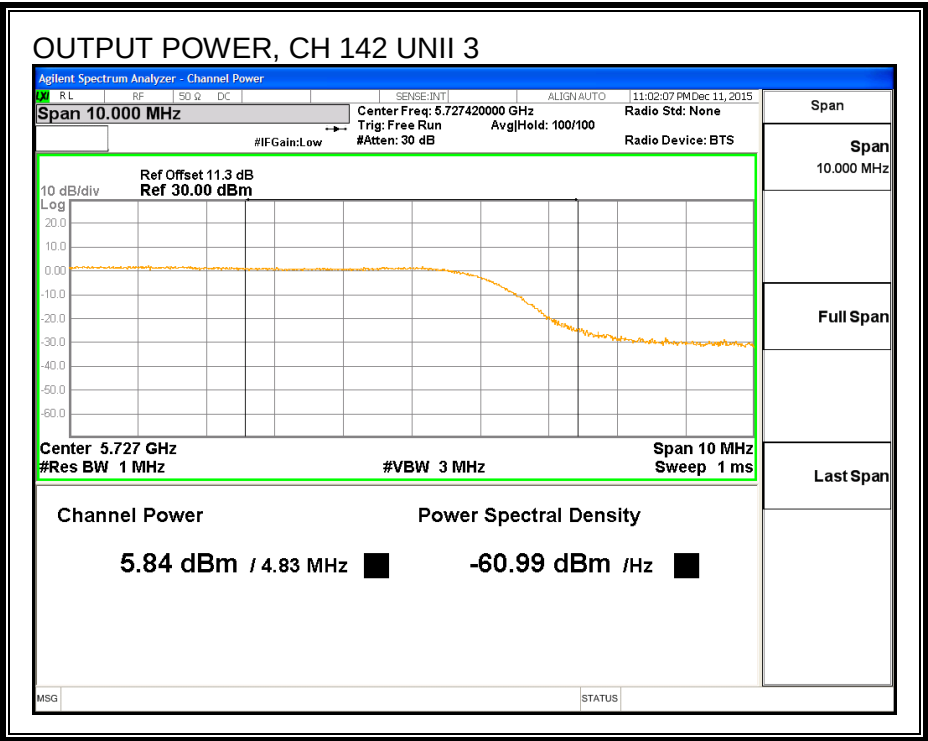

8.10.1. 6 dB BANDWIDTH

LIMITS


FCC §15.407 (e)

The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)
142	5710	3.30

6 dB BANDWIDTH

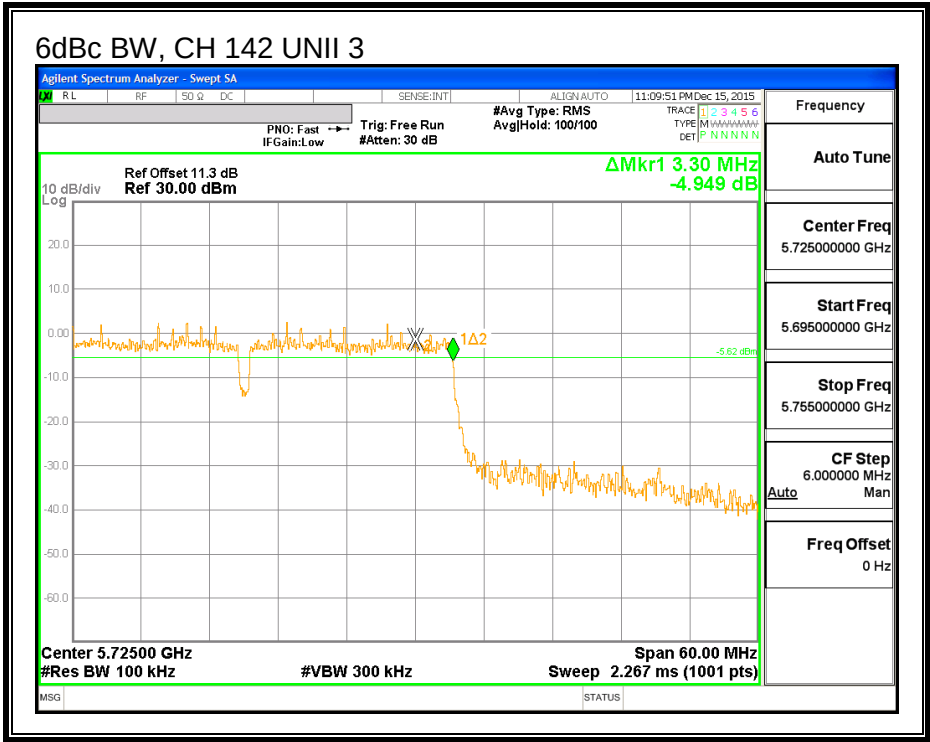

8.11. 802.11ac VHT80 CHAIN 0 MODE IN THE 5.6 GHz BAND

8.11.1. 26 dB BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5530	82.21
Mid	5610	81.55
High	5690	81.59

26 dB BANDWIDTH

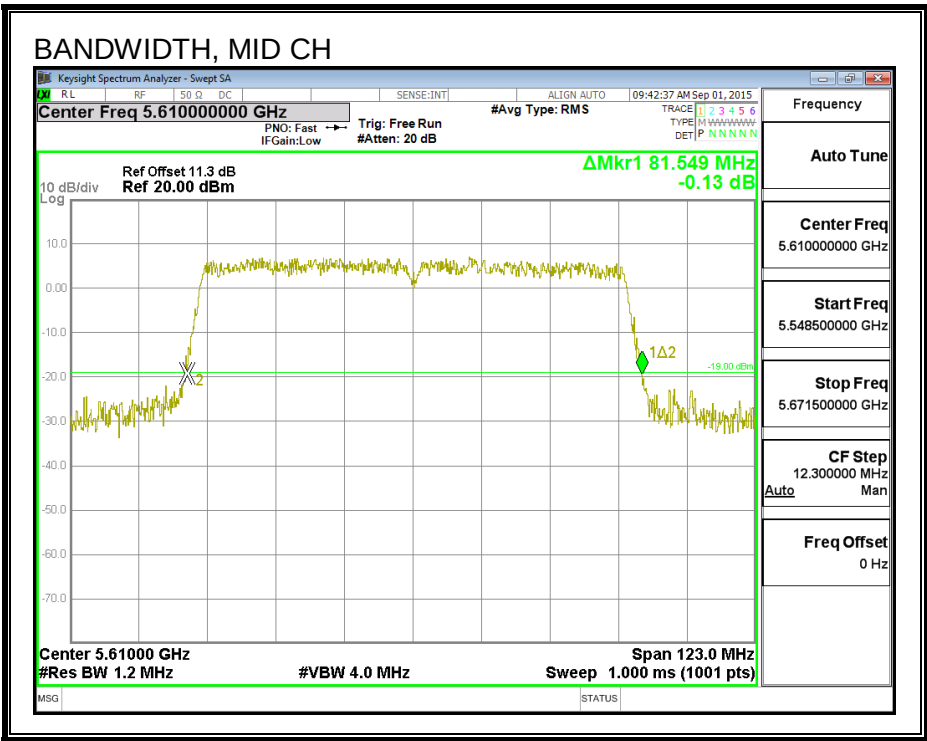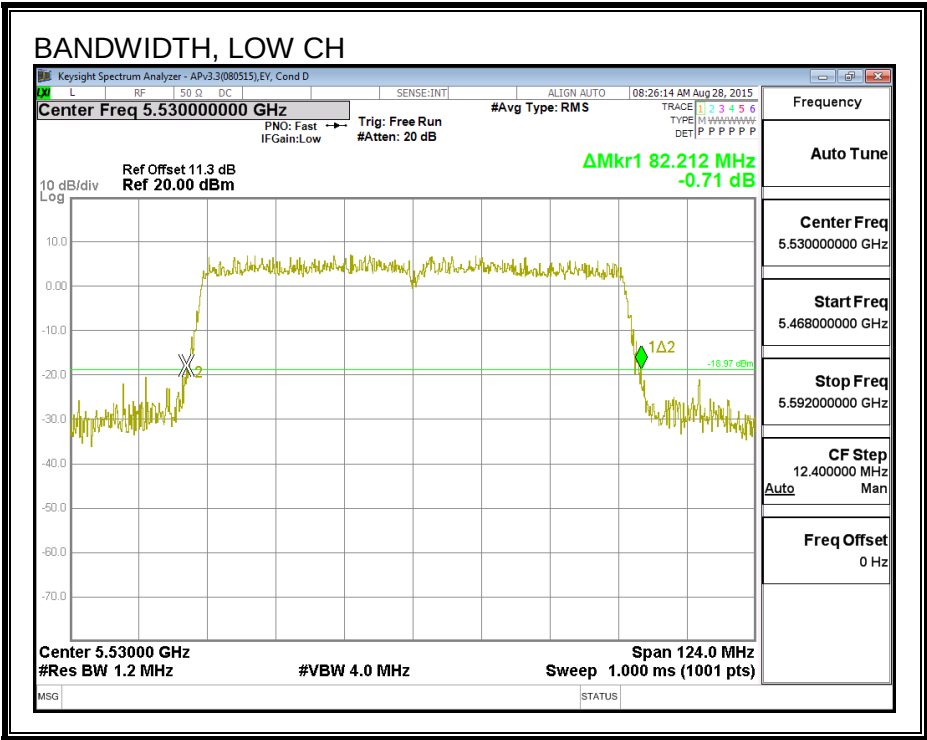

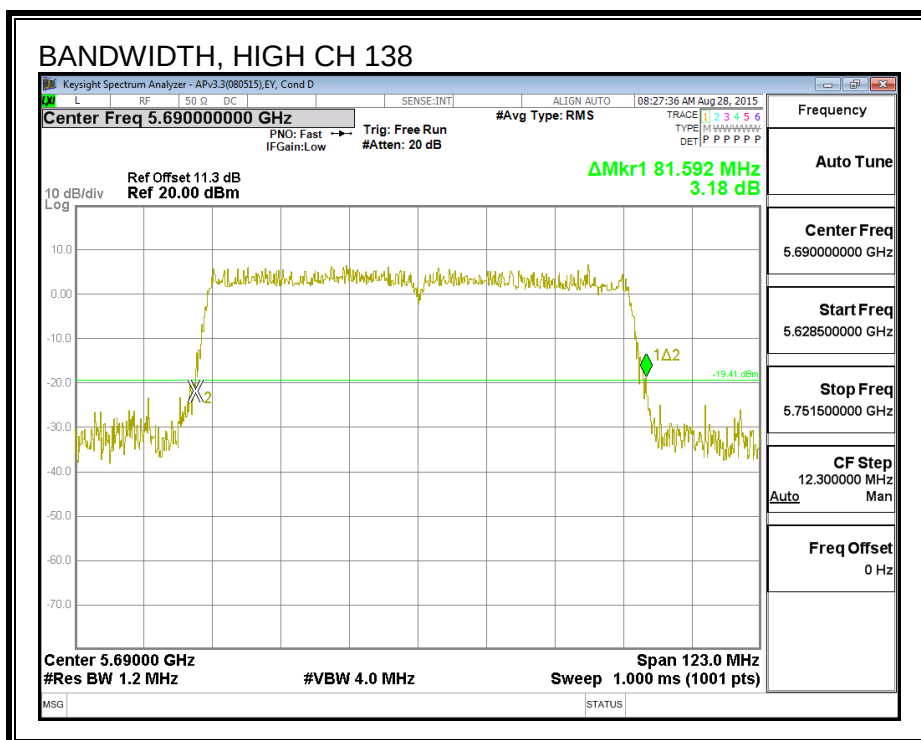

8.11.2. 99% BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS

Frequency (MHz)	99% Bandwidth (MHz)
5530	75.651
5610	75.795
5690	75.808

99% BANDWIDTH

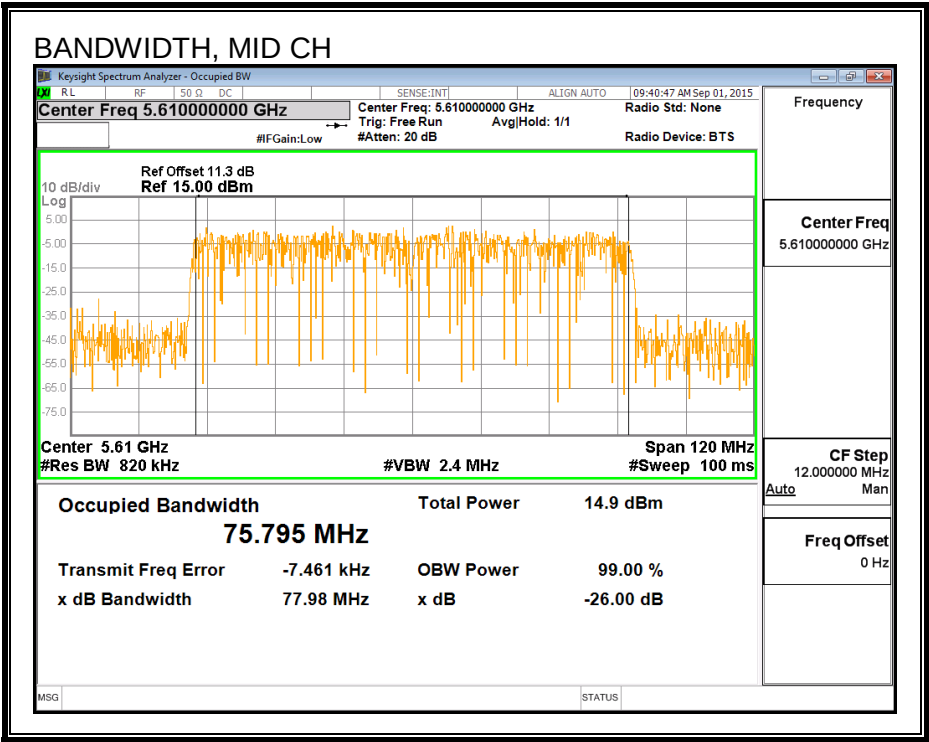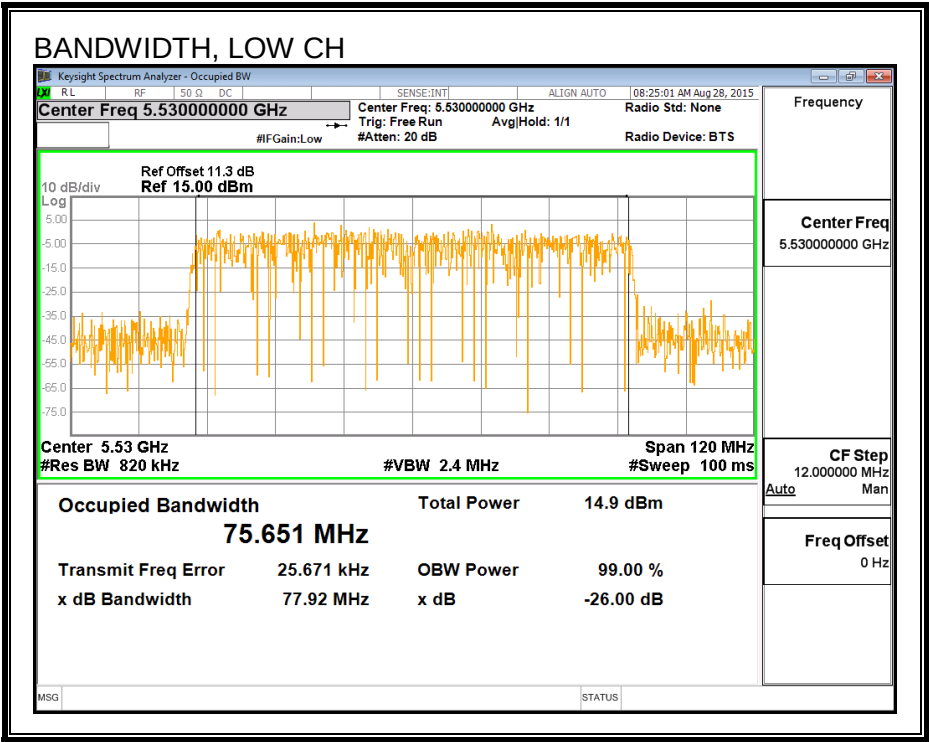

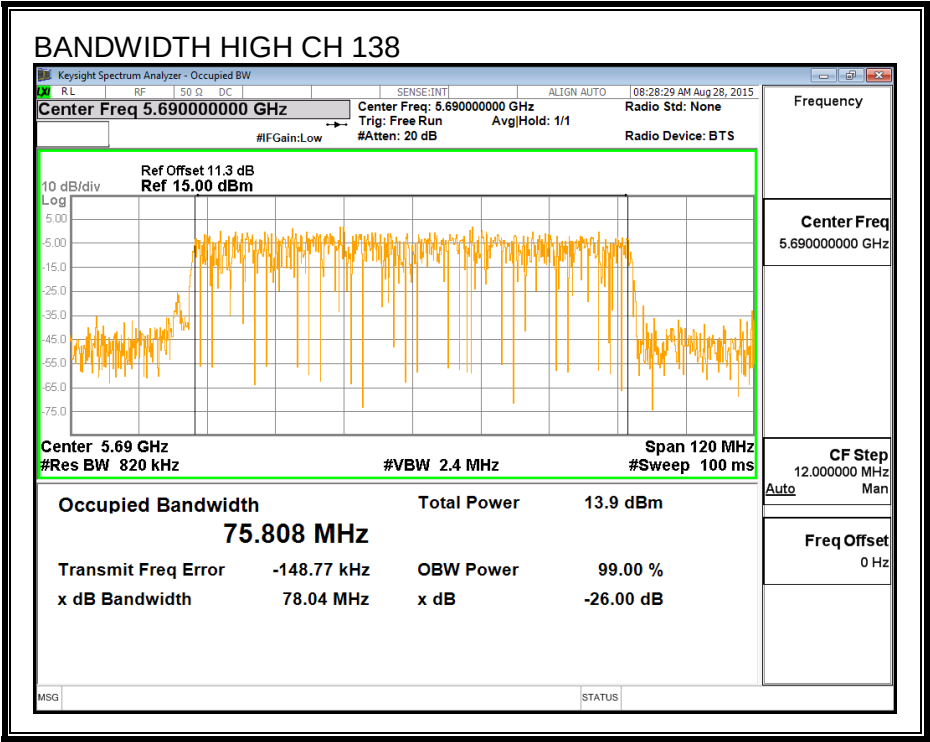

8.11.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

Channel	Frequency (MHz)	Power (dBm)
Low	5530	15.50
Mid	5610	17.00
High	5690	16.92

8.11.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.47–5.725 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26-dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

Straddle channel power is measured using PXA spectrum analyzer, duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5530	82.21	75.651	-5.27	24.00	11.00
High	5610	81.55	75.795	-5.27	24.00	11.00

Duty Cycle CF (dB)	0.17	Included in Calculations of Corr'd PSD
--------------------	------	--



Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5530	15.50	15.50	24.00	-8.50
High	5610	17.00	17.00	24.00	-7.00

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5530	-0.76	-0.59	11.00	-11.59
High	5610	0.03	0.20	11.00	-10.80

PSD

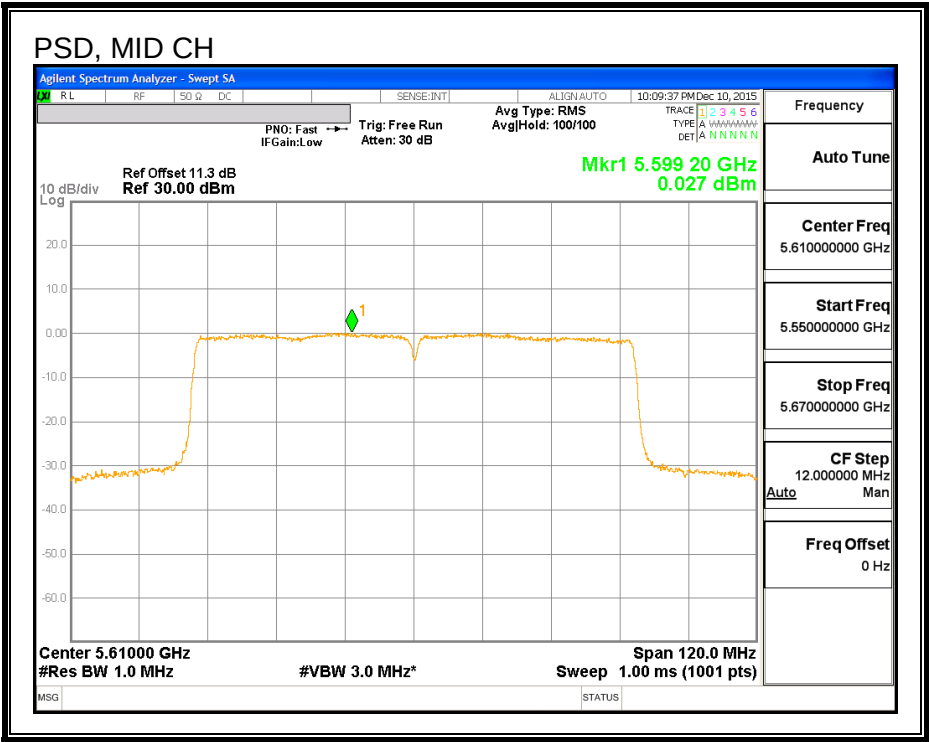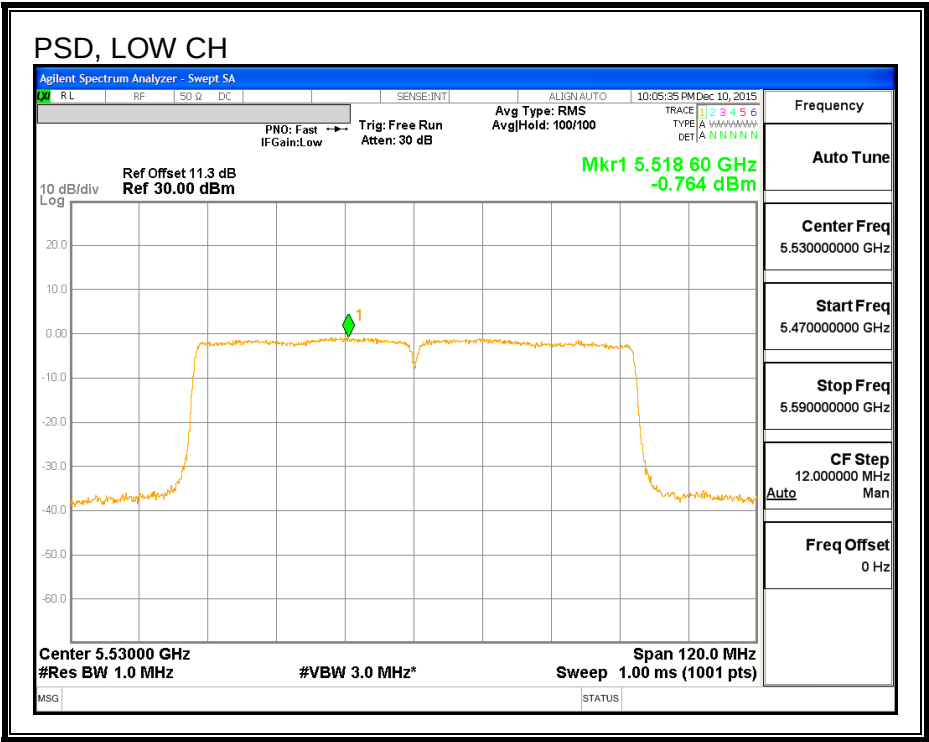

8.11.5. STRADDLE CHANNEL 138 RESULTS

UNII-2C BAND

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
138	5690	75.80	-5.27	-5.27	24.00	11.00



Duty Cycle CF (dB)	0.17	Included in Calculations of Corr'd Power & PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
138	5690	16.50	16.67	24.00	-7.33

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
138	5690	-1.12	-0.95	11.00	-11.95

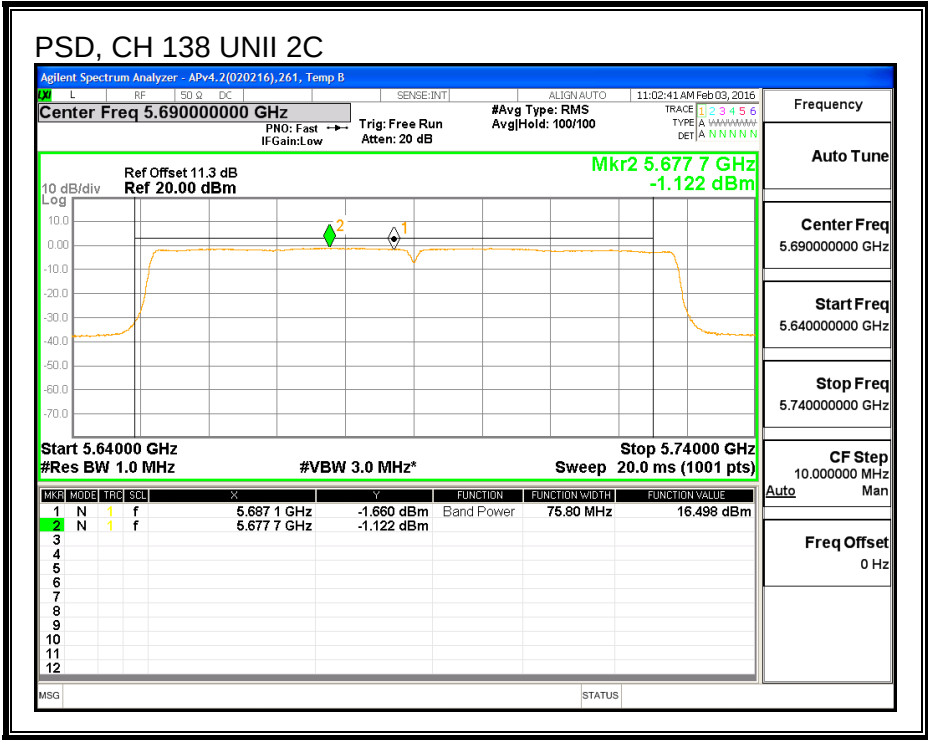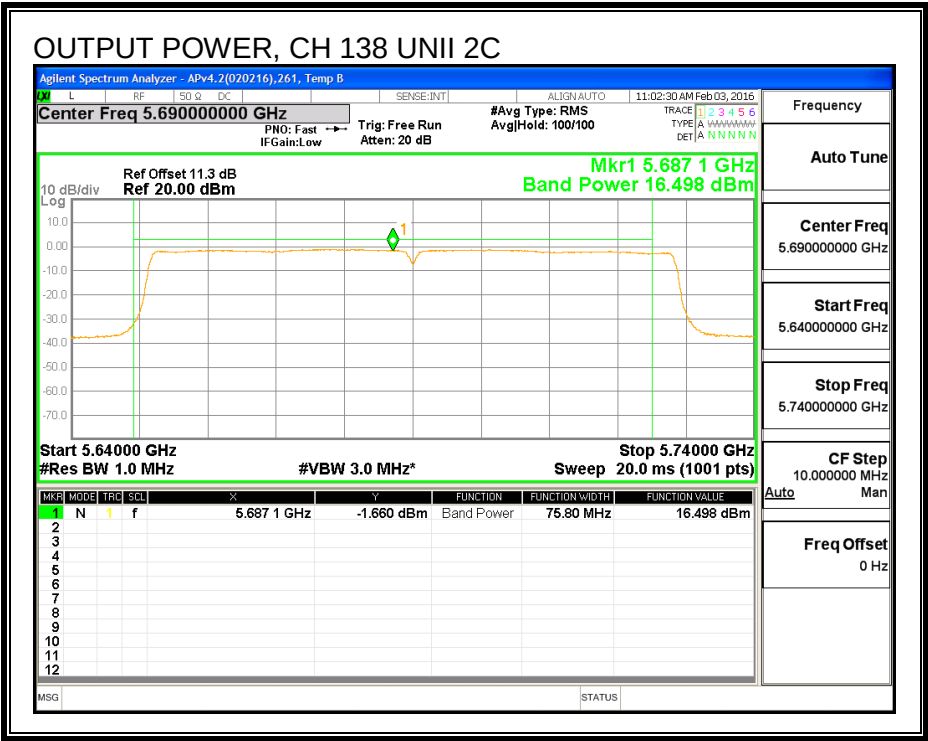

UNII-3 BAND

Antenna Gain and Limit

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
138	5690	5.80	-5.27	30.00	30.00



Duty Cycle CF (dB)	0.17	Included in Calculations of Corr'd Power & PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
138	5690	2.13	2.30	30.00	-27.71

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
138	5690	-5.45	-5.28	30.00	-35.28

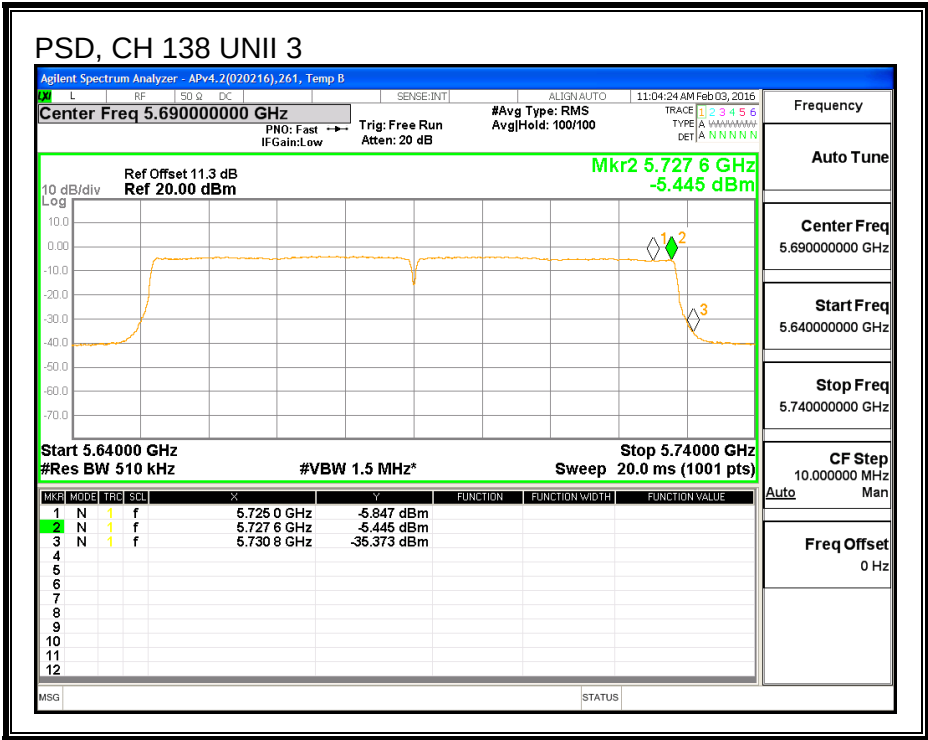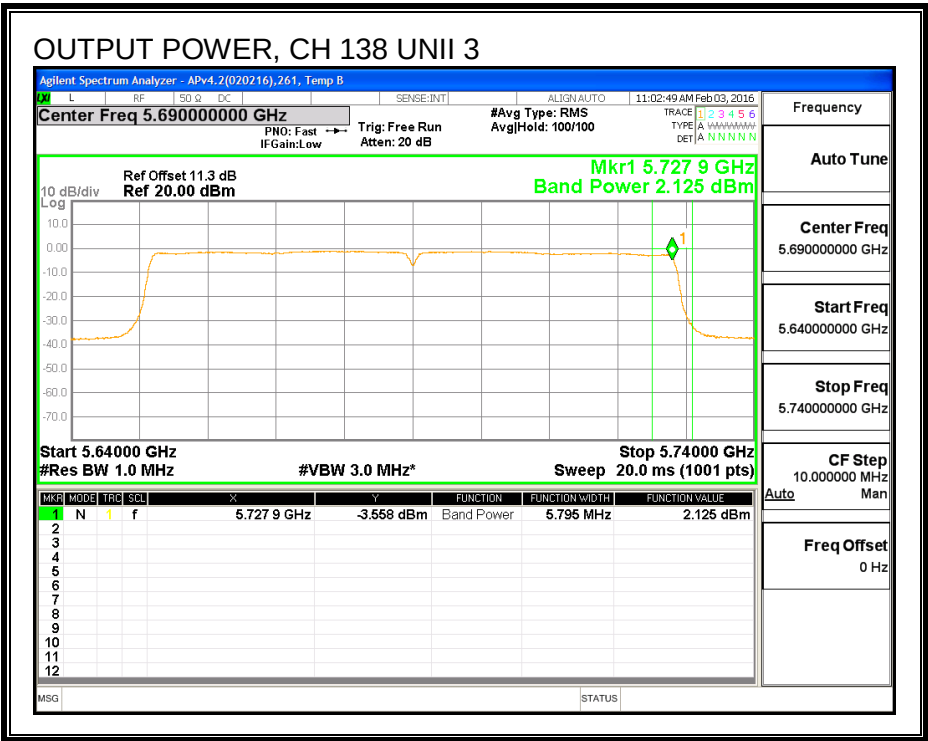

8.11.6. 6 dB BANDWIDTH

LIMITS


FCC §15.407 (e)

The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)
High	5690	3.36

6 dB BANDWIDTH

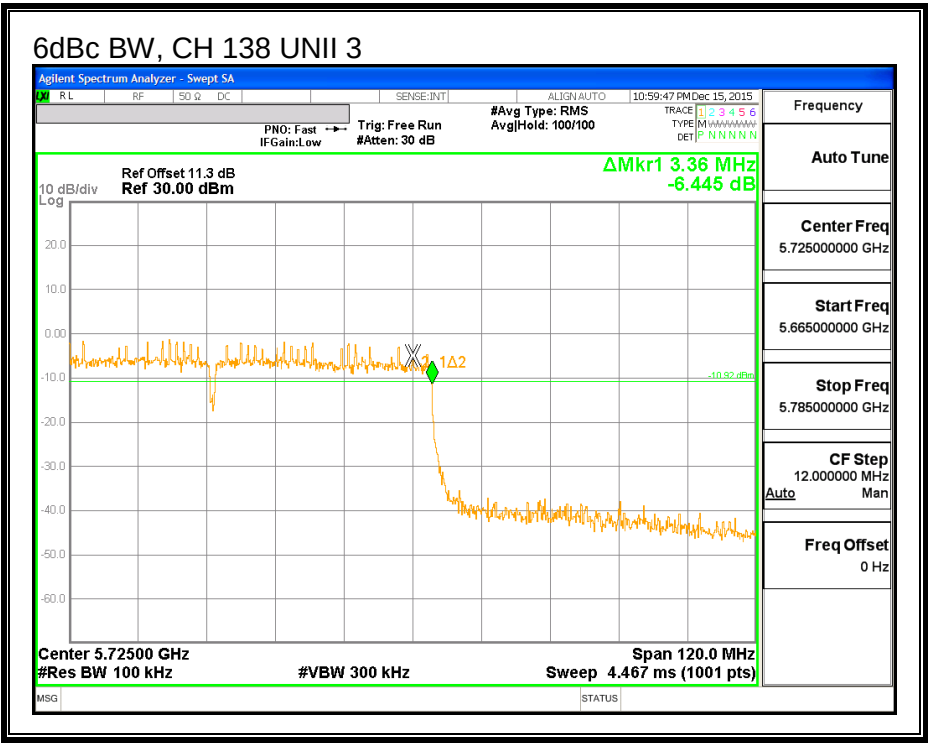

8.12. 802.11n HT20 CHAIN 0 MODE IN THE 5.8 GHz BAND

8.12.1. 6 dB BANDWIDTH



LIMITS


FCC §15.407 (e)

The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	5745	17.631	0.5
Mid	5785	17.793	0.5
High	5825	17.631	0.5

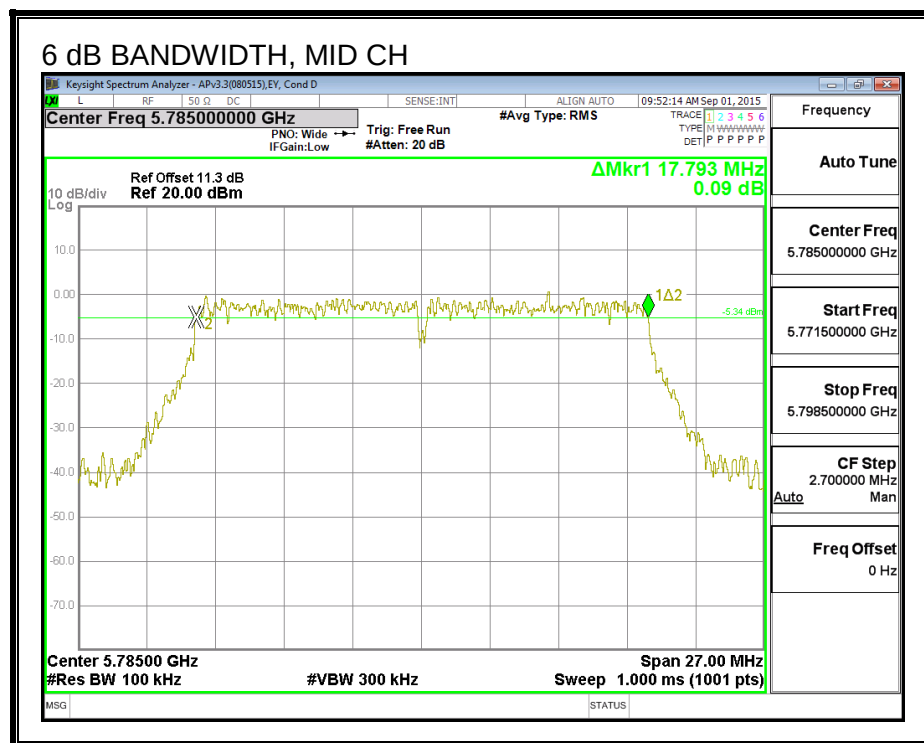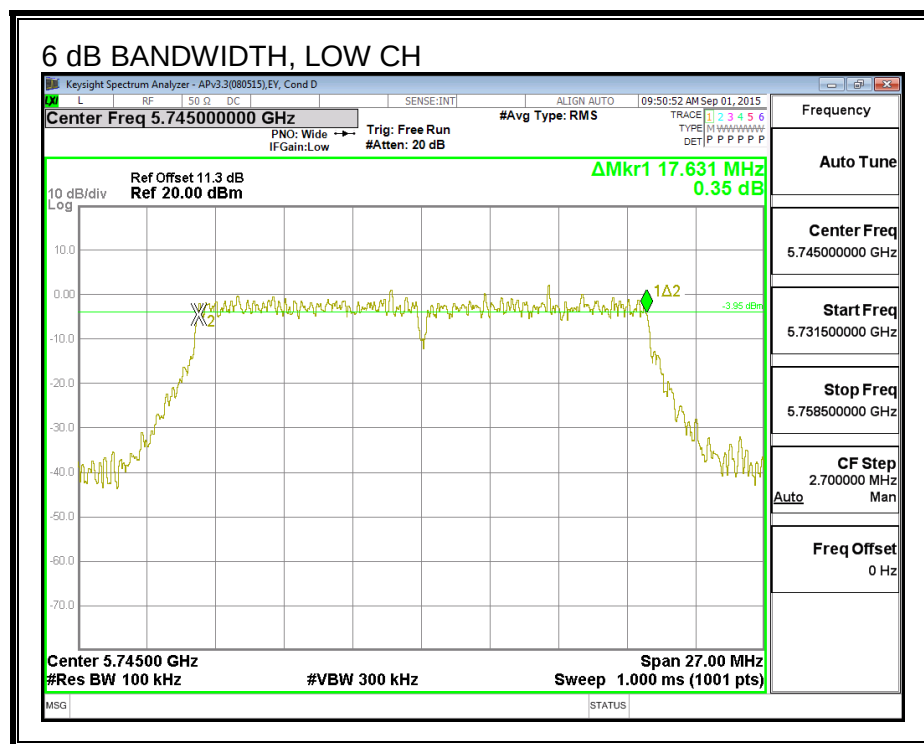

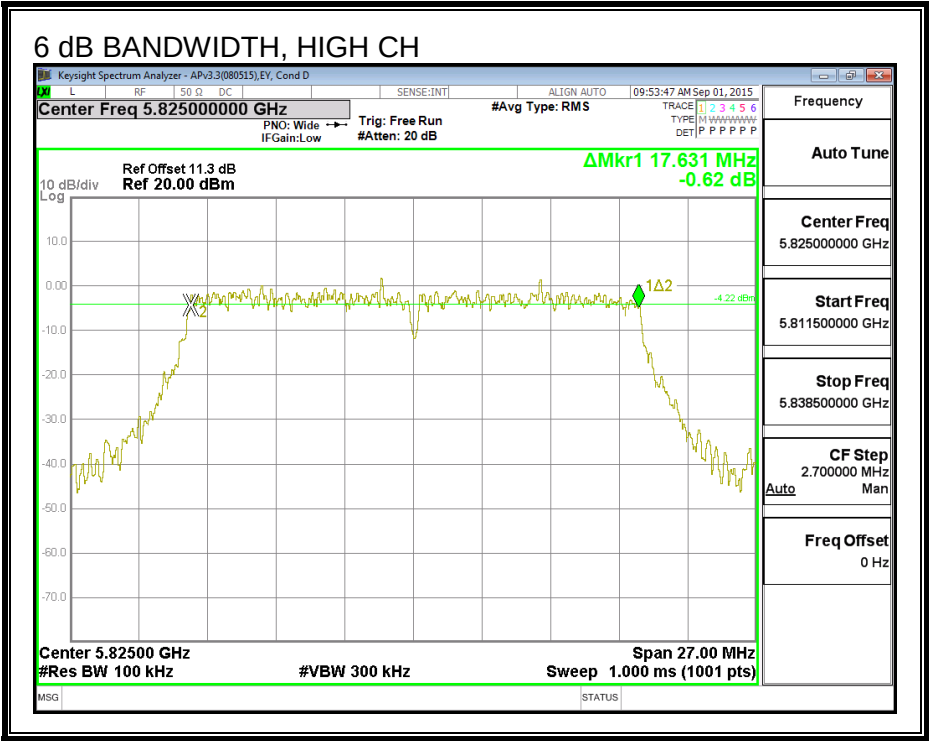

8.12.2. 26 dB BANDWIDTH



LIMITS


None, for reporting purposes only

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5745	20.99
Mid	5785	20.90
High	5825	21.22

26 dB BANDWIDTH

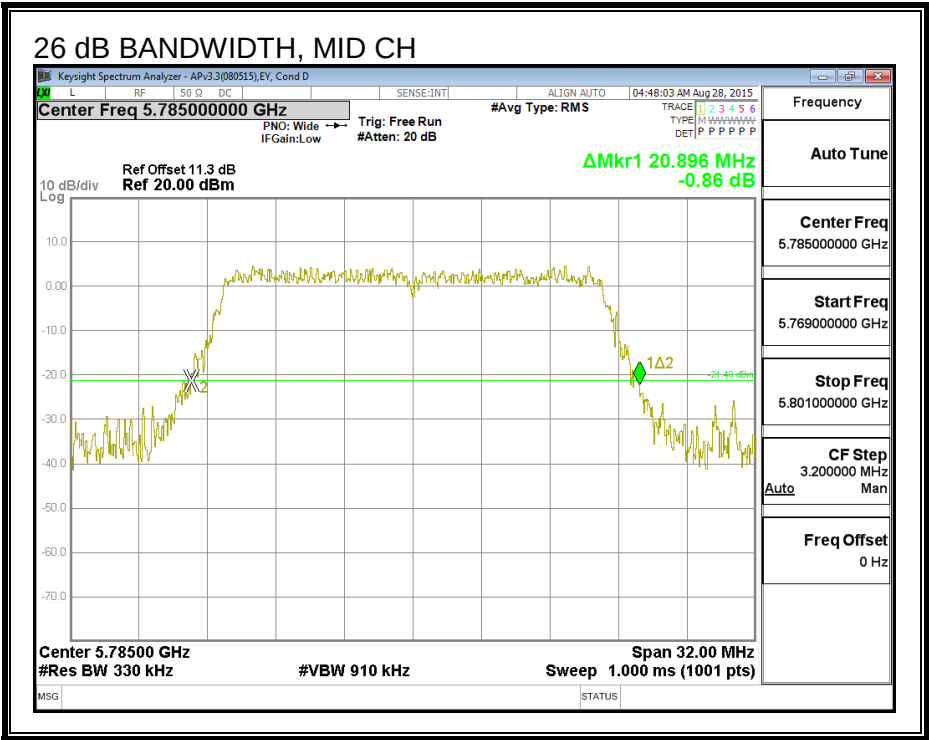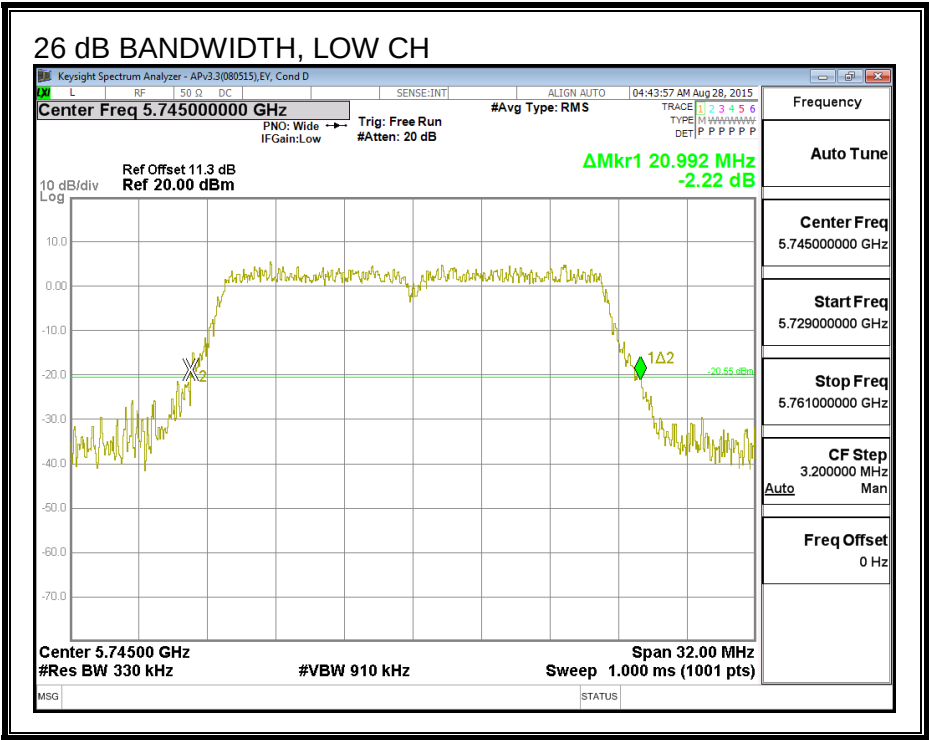

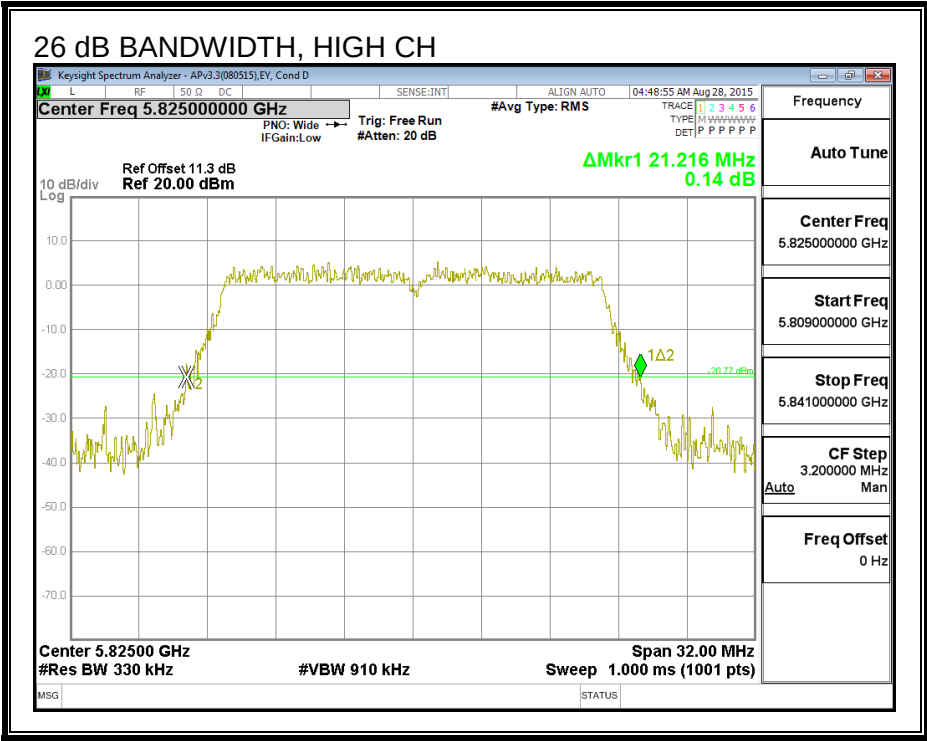

8.12.3. 99% BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS

Frequency (MHz)	99% Bandwidth (MHz)
5745	17.842
5785	17.845
5825	17.924

99% BANDWIDTH

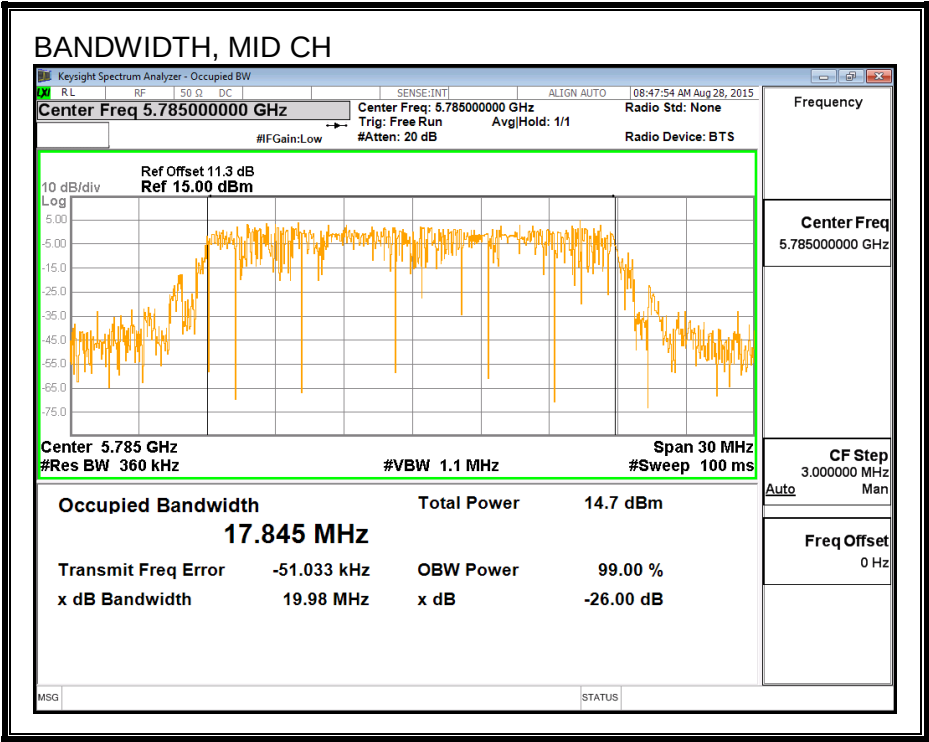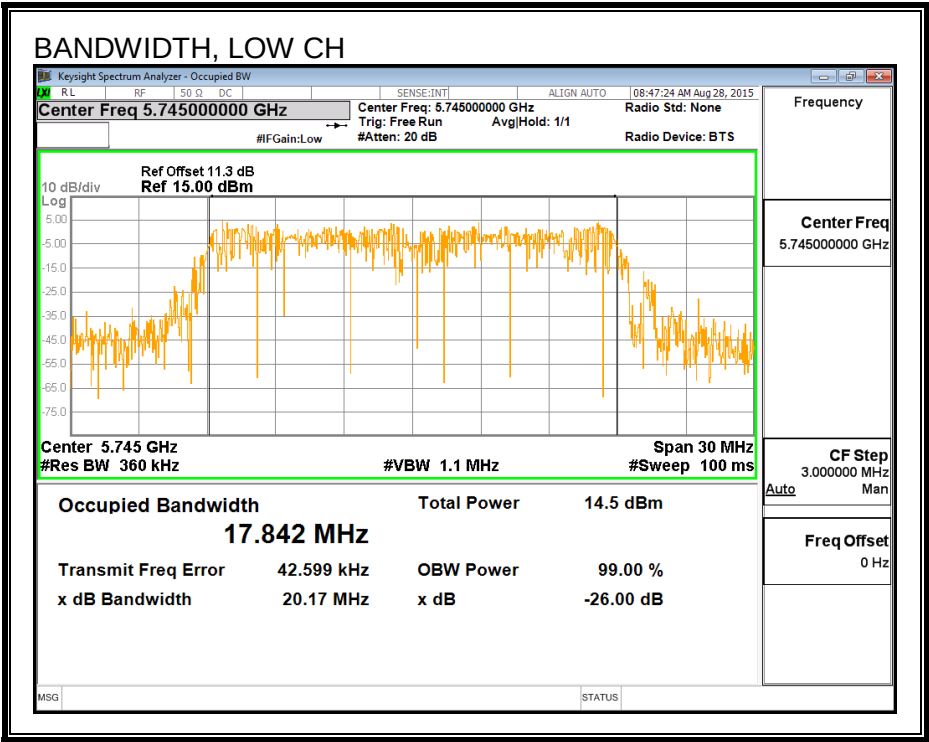

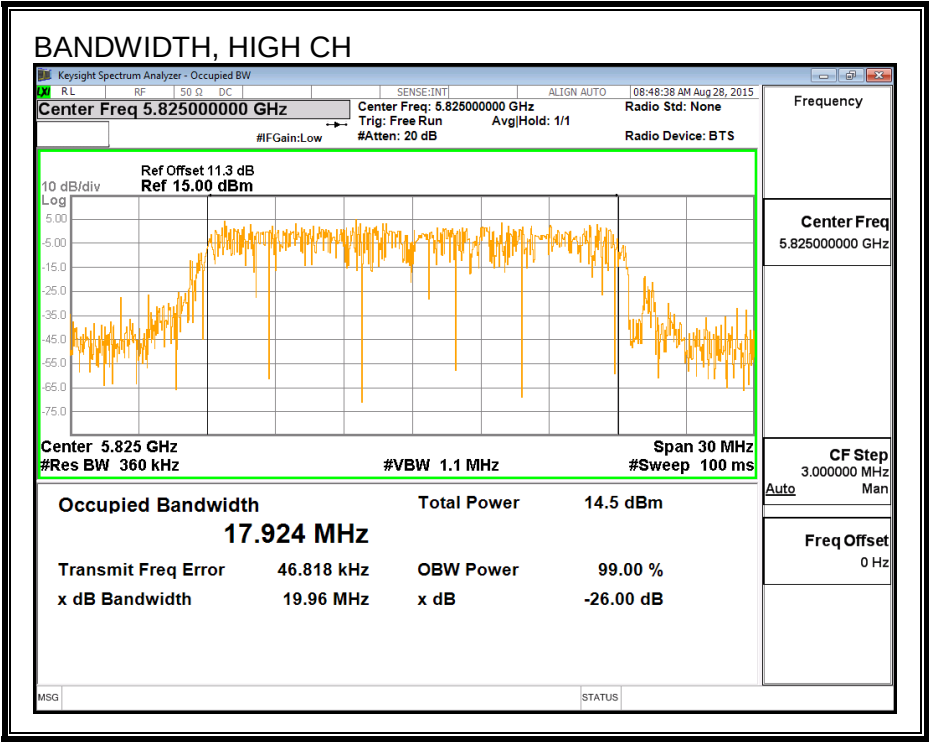

8.12.4. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

Channel	Frequency (MHz)	Power (dBm)
Low	5745	16.45
Mid	5785	16.93
High	5825	16.97

8.12.5. OUTPUT POWER

LIMITS

FCC §15.407 (a) (3)

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Power Limit (dBm)
Low	5745	-4.90	30.00
Mid	5785	-4.90	30.00
High	5825	-4.90	30.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5745	16.45	16.45	30.00	-13.55
Mid	5785	16.93	16.93	30.00	-13.07
High	5825	16.97	16.97	30.00	-13.03

8.12.6. PSD

LIMITS

FCC §15.407 (a) (3)

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Antenna Gain and Limits



Channel	Frequency (MHz)	Directional Gain (dBi)	PSD Limit (dBm)
Low	5745	-4.90	30.00
Mid	5785	-4.90	30.00
High	5825	-4.90	30.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5745	4.97	4.97	30.00	-25.03
Mid	5785	5.55	5.55	30.00	-24.45
High	5825	5.59	5.59	30.00	-24.41

PSD

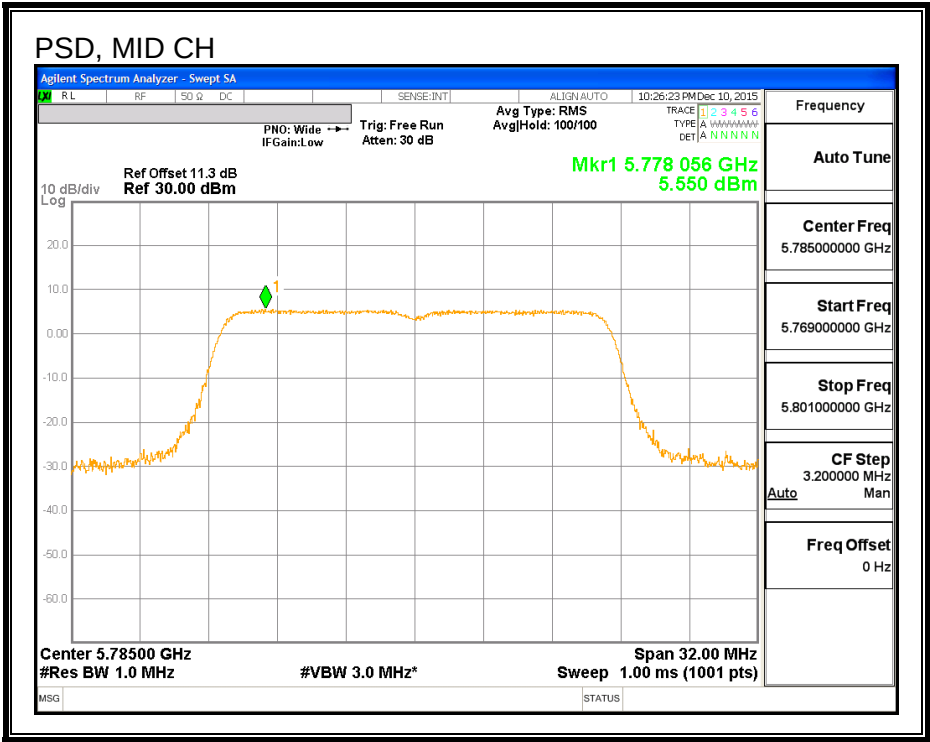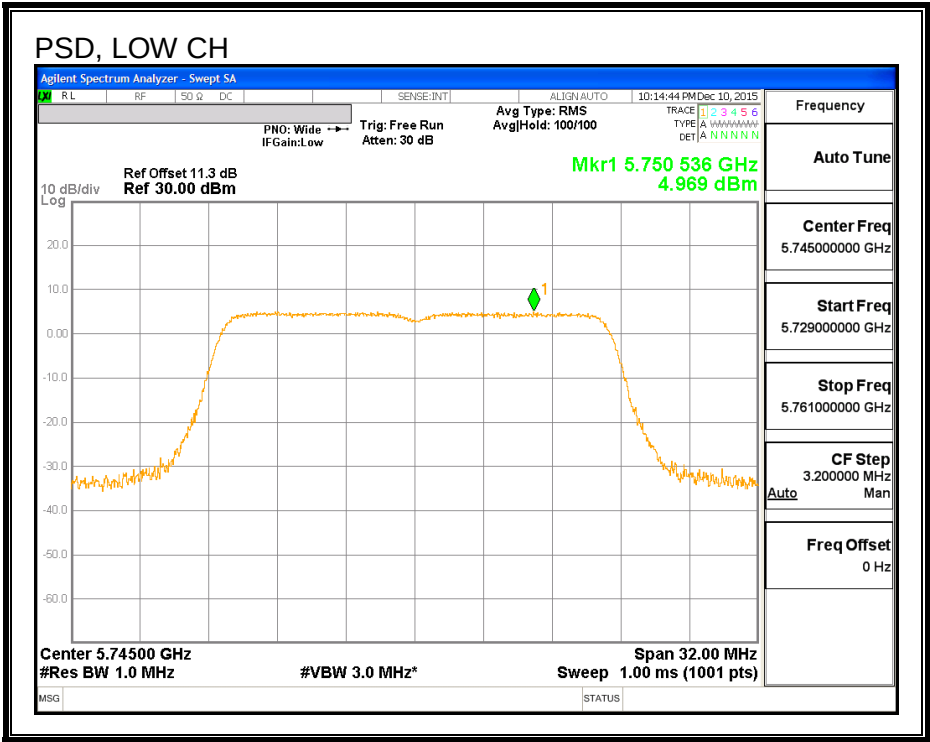

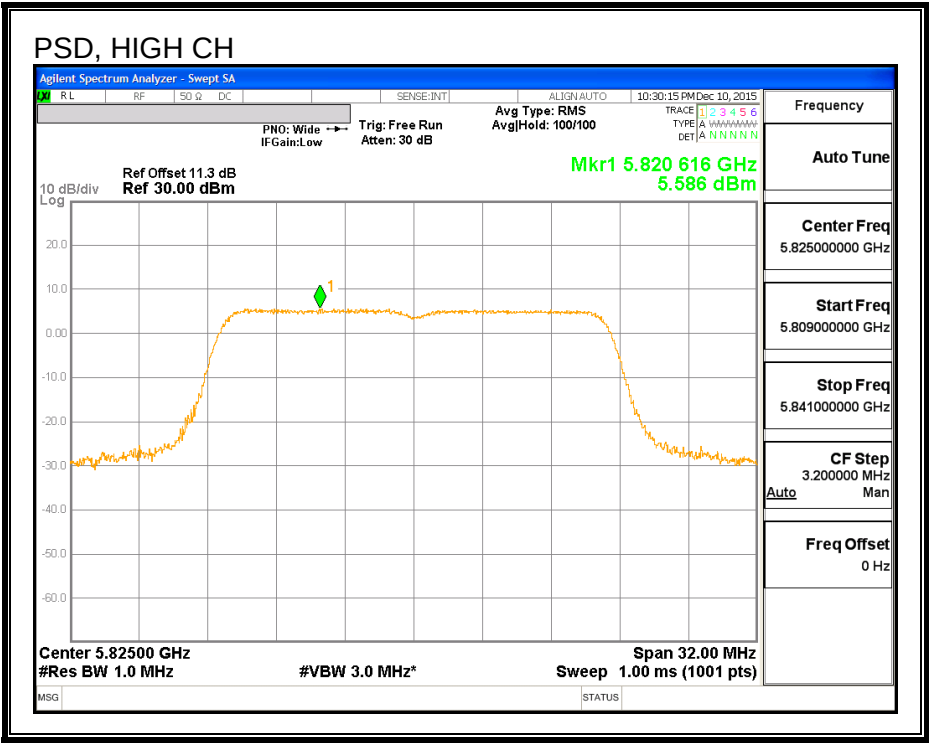

8.13. 802.11n HT40 CHAIN 0 MODE IN THE 5.8 GHz BAND

8.13.1. 6 dB BANDWIDTH



LIMITS

FCC §15.407 (e)

The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	5755	36.355	0.5
High	5795	36.410	0.5

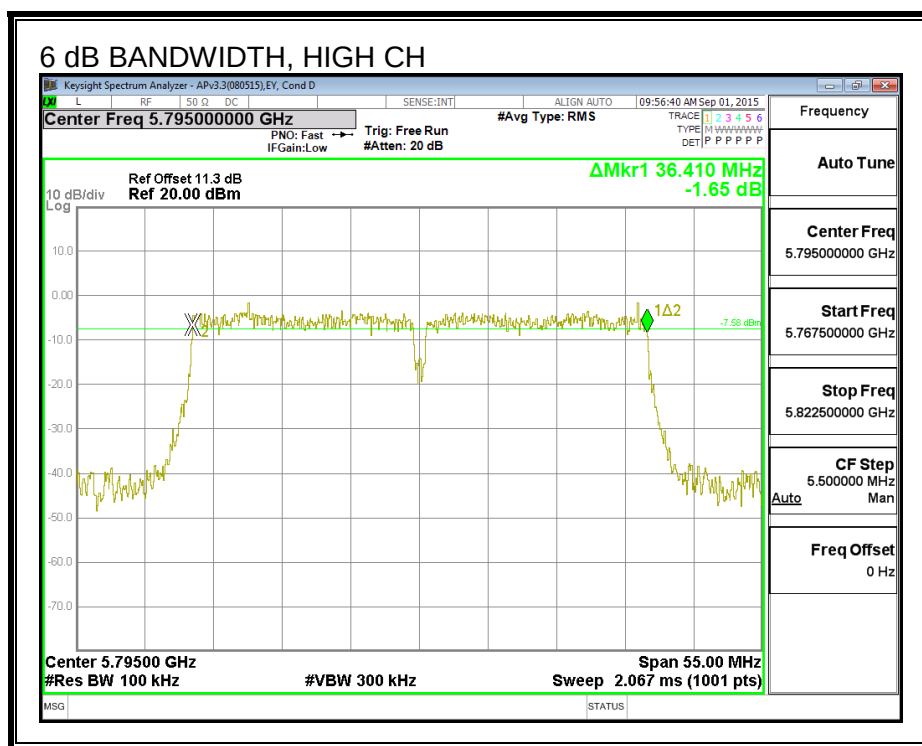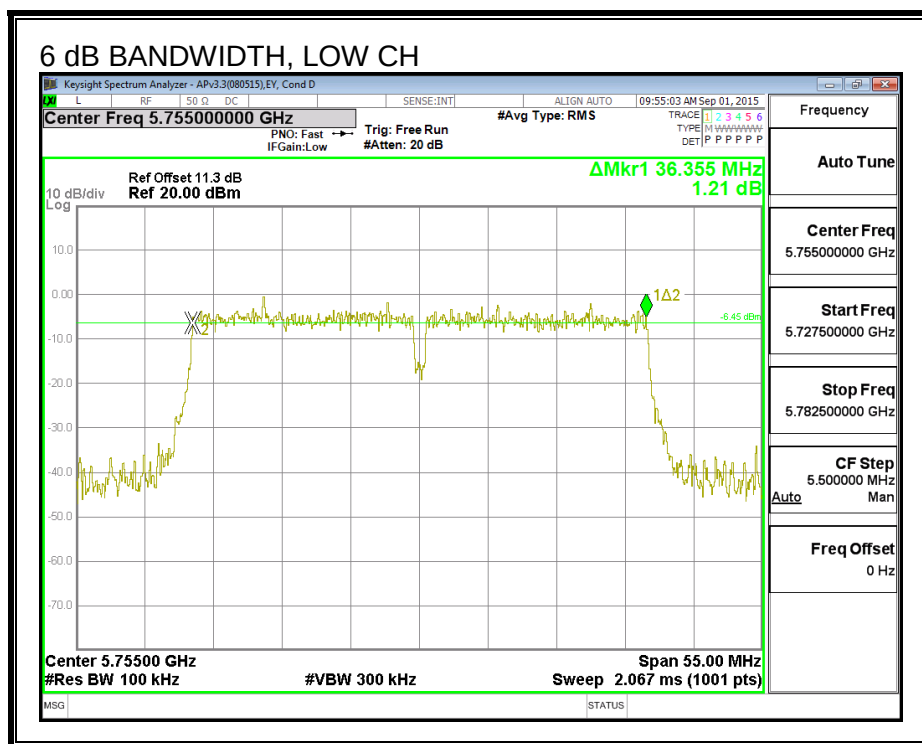

8.13.2. 26 dB BANDWIDTH



LIMITS

None, for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5755	39.42
High	5795	39.60

26 dB BANDWIDTH

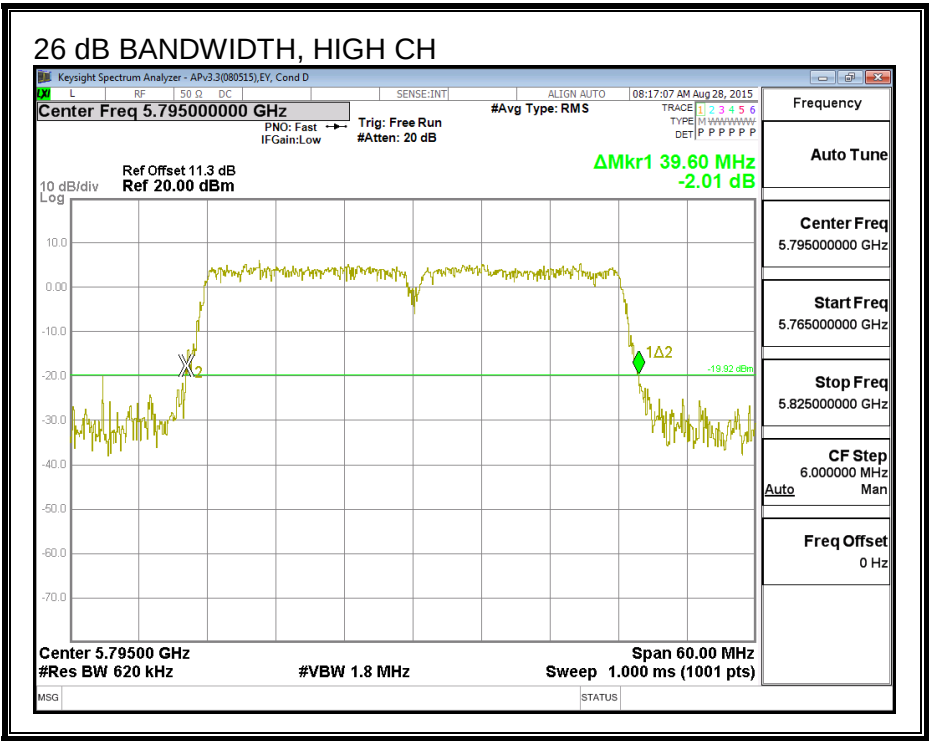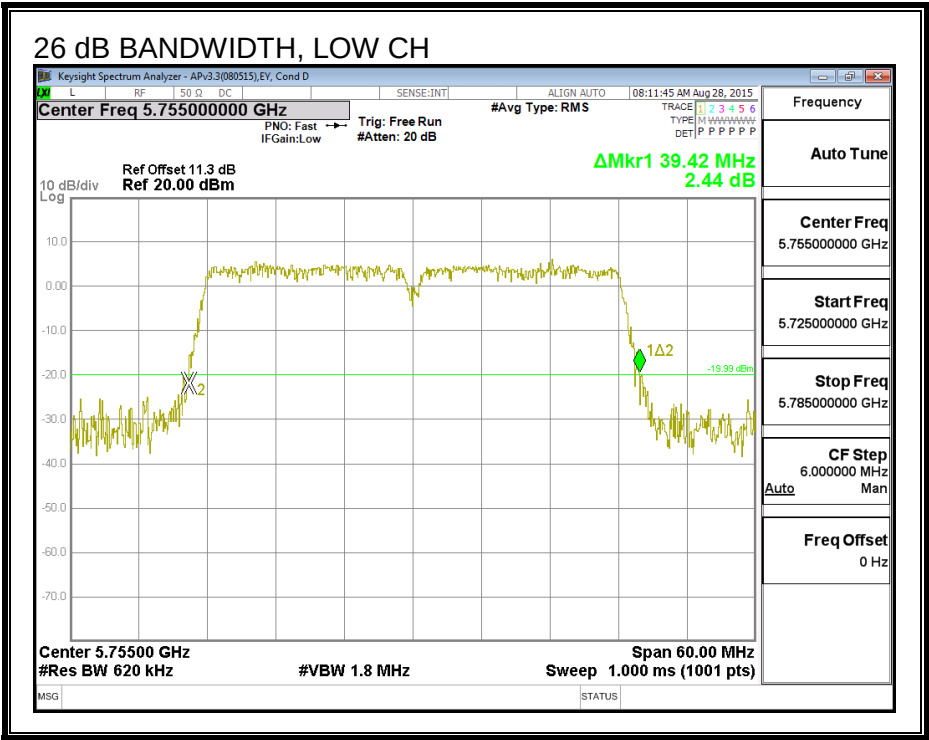

8.13.3. 99% BANDWIDTH



LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5755	36.219
High	5795	36.351

99% BANDWIDTH

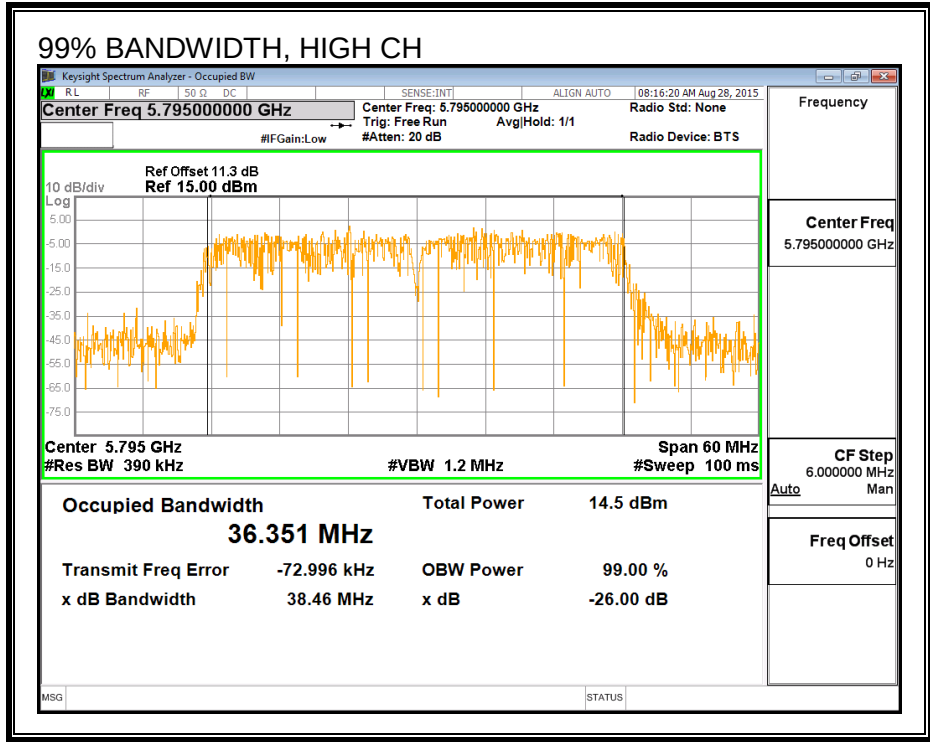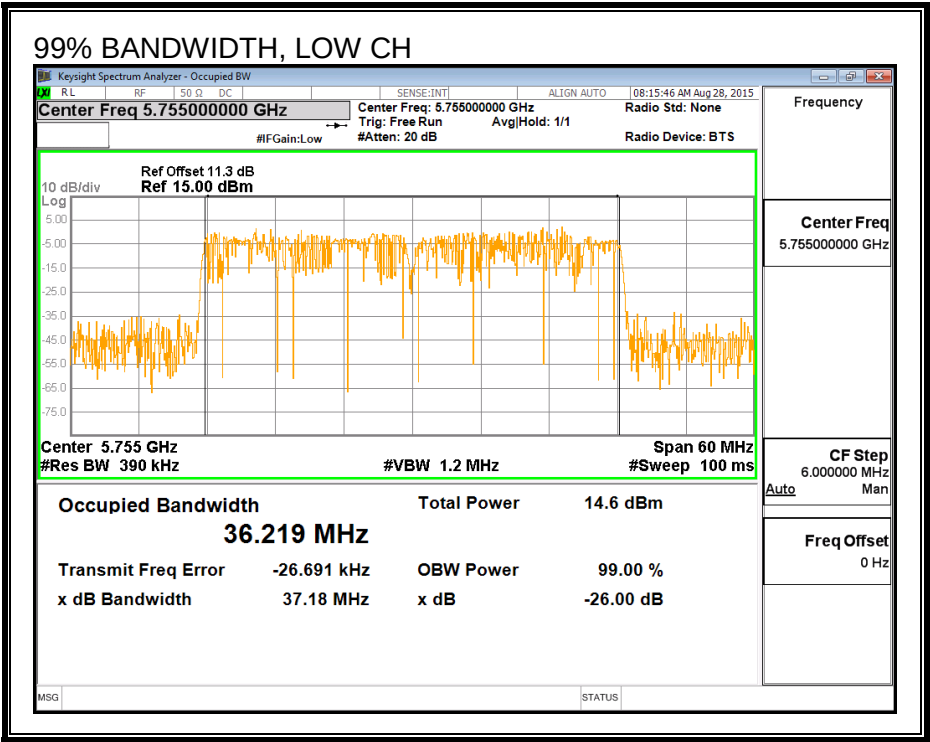

8.13.4. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

Channel	Frequency (MHz)	Power (dBm)
Low	5755	14.96
High	5795	16.91

8.13.5. OUTPUT POWER

LIMITS

FCC §15.407 (a) (3)

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain (dBi)	Power Limit (dBm)
Low	5755	-4.90	30.00
High	5795	-4.90	30.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5755	14.96	14.96	30.00	-15.04
High	5795	16.91	16.91	30.00	-13.09

8.13.6. PSD

LIMITS

FCC §15.407 (a) (3)

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Antenna Gain and Limits



Channel	Frequency (MHz)	Directional Gain (dBi)	PSD Limit (dBm)
Low	5755	-4.90	30.00
High	5795	-4.90	30.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5755	1.52	1.52	30.00	-28.49
High	5795	2.80	2.80	30.00	-27.20

PSD

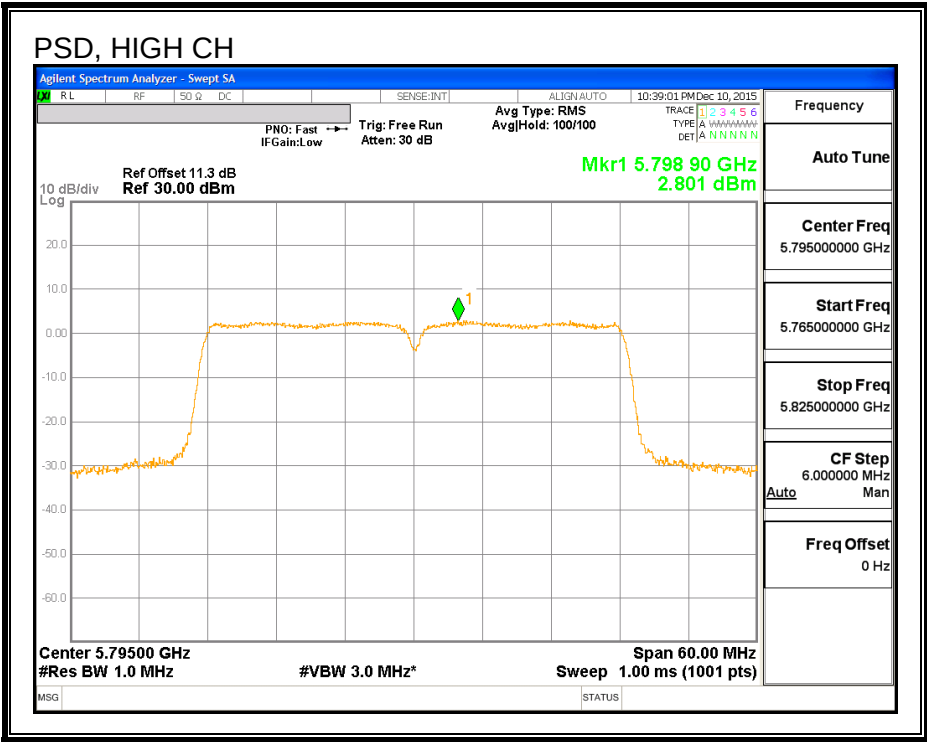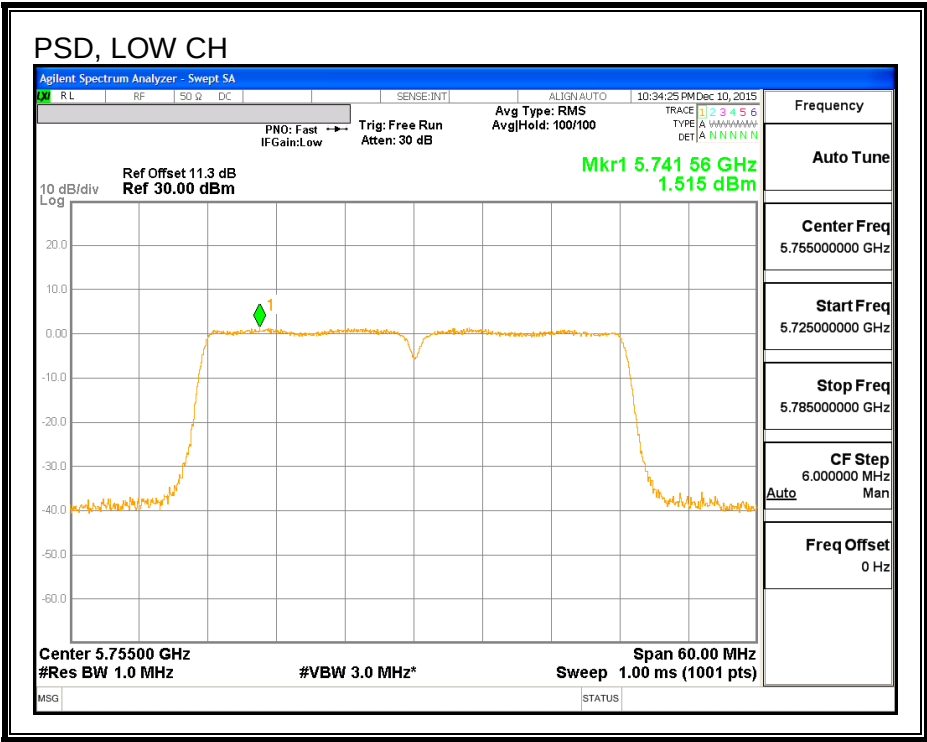

8.14. 802.11ac VHT80 CHAIN 0 MODE IN THE 5.8 GHz BAND

8.14.1. 6 dB BANDWIDTH

LIMITS


FCC §15.407 (e)

The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Mid	5775	76.02	0.5

6 dB BANDWIDTH

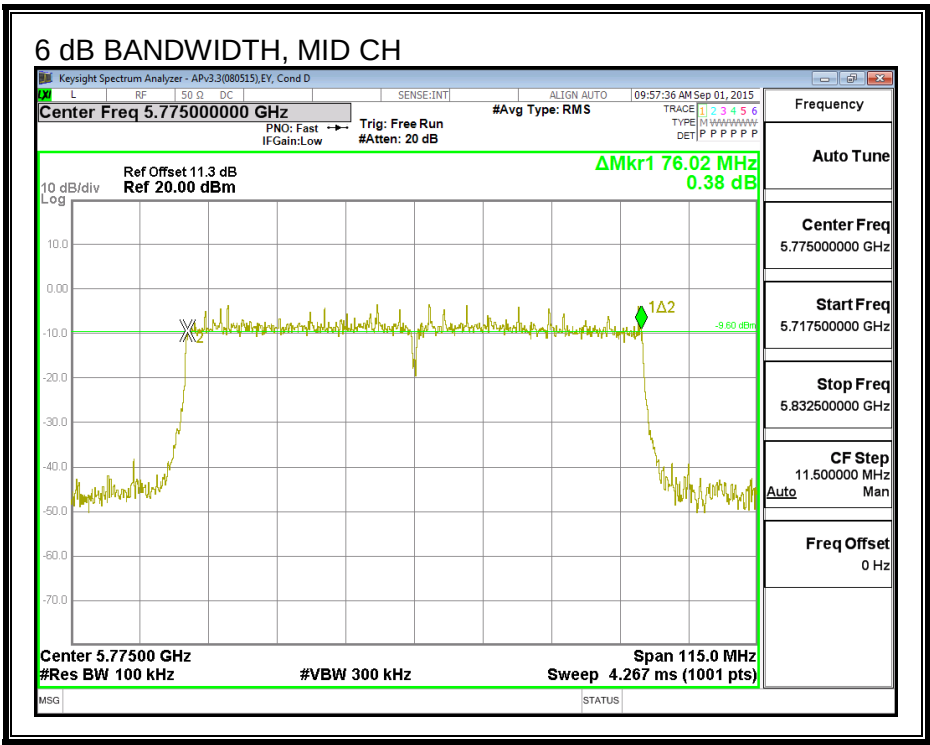

8.14.2. 26 dB BANDWIDTH


LIMITS

None, for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Mid	5775	81.67

26 dB BANDWIDTH

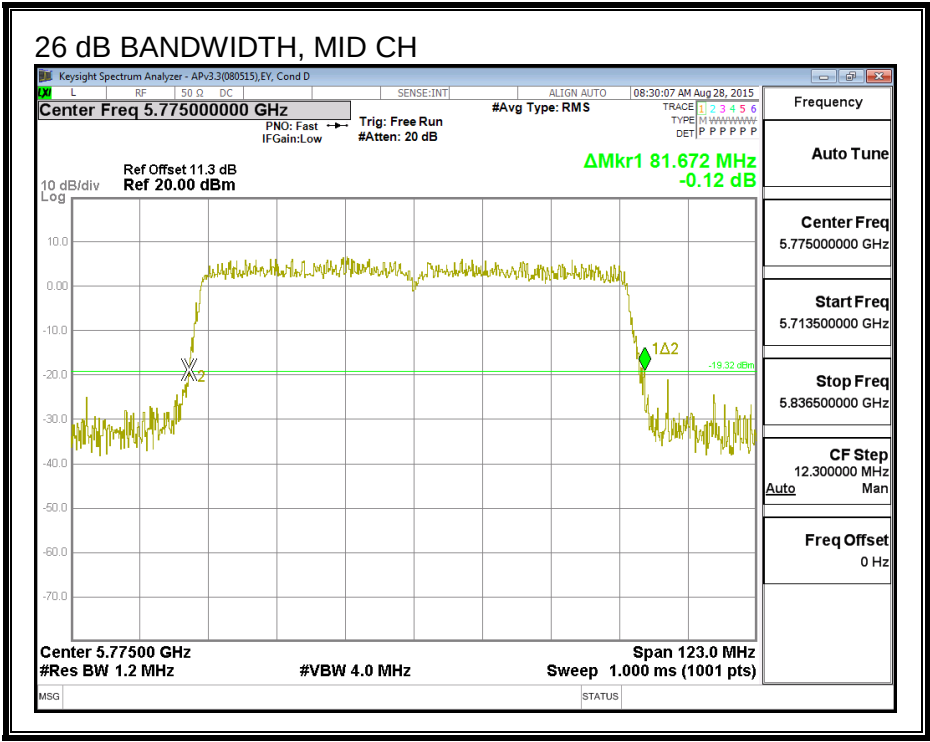

8.14.4. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

Channel	Frequency (MHz)	Power (dBm)
Mid	5775	14.44

8.14.5. OUTPUT POWER

LIMITS

FCC §15.407 (a) (3)

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain (dBi)	Power Limit (dBm)
Mid	5775	-4.90	30.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5775	14.44	14.44	30.00	-15.56

8.14.6. PSD

LIMITS

FCC §15.407 (a) (3)

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Antenna Gain and Limits


Channel	Frequency (MHz)	Directional Gain (dBi)	PSD Limit (dBm)
Mid	5775	-4.90	30.00

Duty Cycle CF (dB)	0.17	Included in Calculations of Corr'd PSD
--------------------	------	--

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Mid	5775	-2.54	-2.37	30.00	-32.37

PSD

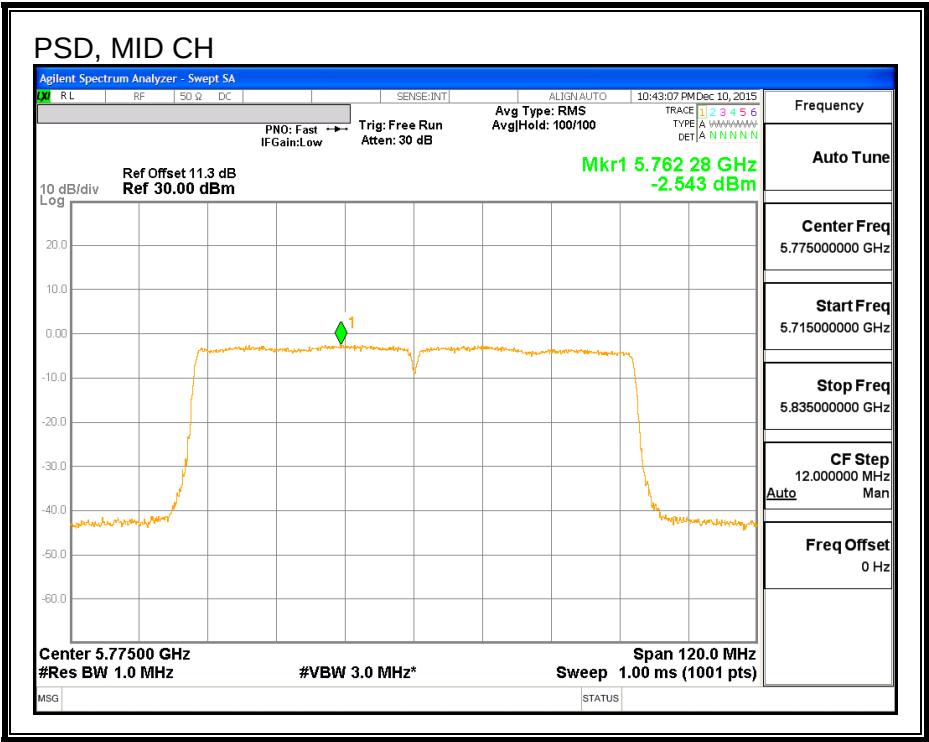

9. RADIATED TEST RESULTS

9.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements and as applicable for average measurements.


The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each applicable band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

Radiated emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

9.1.1. 802.11n HT20 1Tx MODE IN THE 5.2 GHz BAND

RESTRICTED BANDEDGE, CHAIN 0 (LOW CHANNEL)

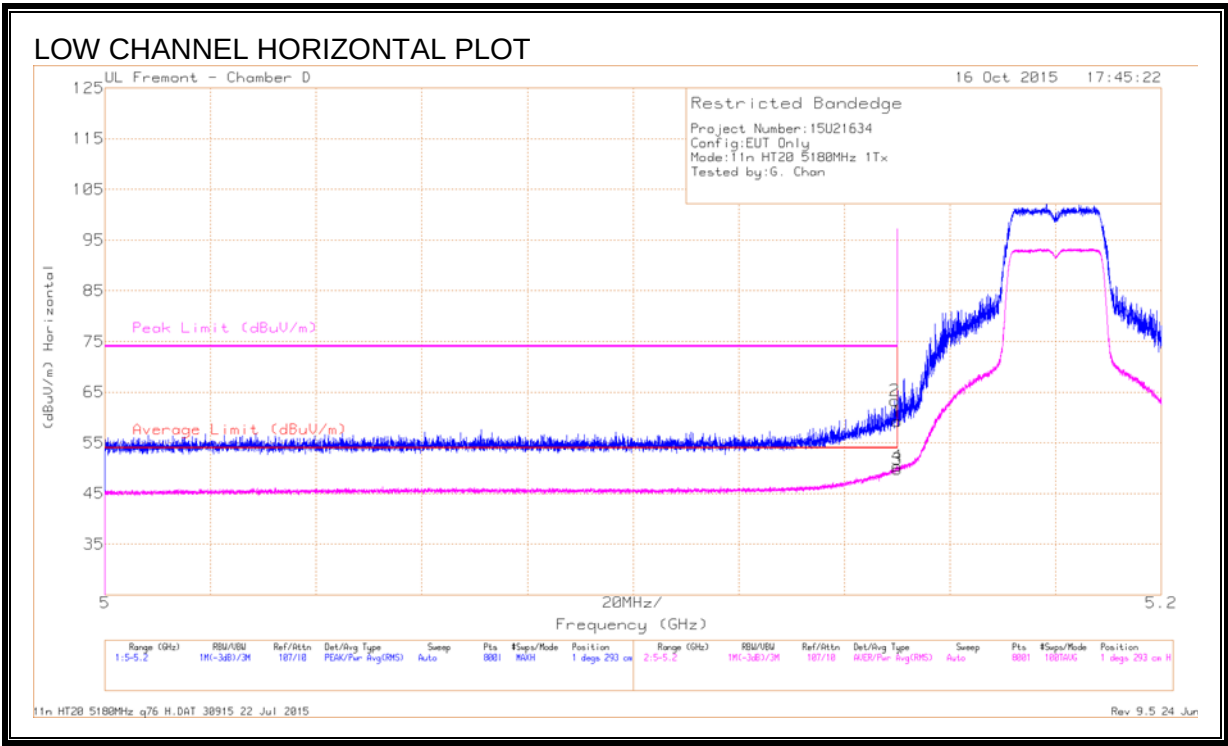

DATA


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/ Filt/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.15	45.46	Pk	34.3	-20.5	59.26	-	-	74	-14.74	1	293	H
2	* 5.15	49.54	Pk	34.3	-20.5	63.34	-	-	74	-10.66	1	293	H
3	* 5.15	36.02	RMS	34.3	-20.5	49.82	54	-4.18	-	-	1	293	H
4	* 5.15	36.6	RMS	34.3	-20.5	50.4	54	-3.6	-	-	1	293	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection

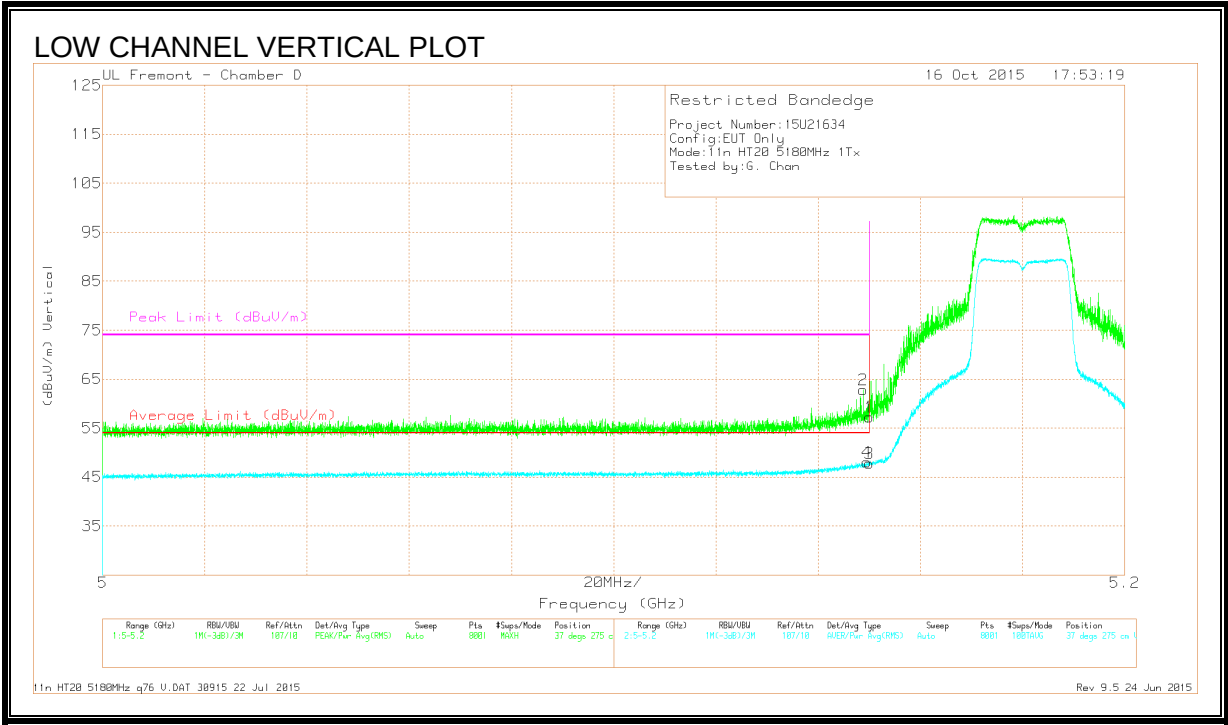

DATA

Trace Markers



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/ Filt/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.149	49.01	Pk	34.3	-20.5	62.81	-	-	74	-11.19	37	275	V
1	* 5.15	43.41	Pk	34.3	-20.5	57.21	-	-	74	-16.79	37	275	V
3	* 5.15	34	RMS	34.3	-20.5	47.8	54	-6.2	-	-	37	275	V
4	* 5.15	34.28	RMS	34.3	-20.5	48.08	54	-5.92	-	-	37	275	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection

LOW CHANNEL HARMONICS AND SPURIOUS EMISSIONS

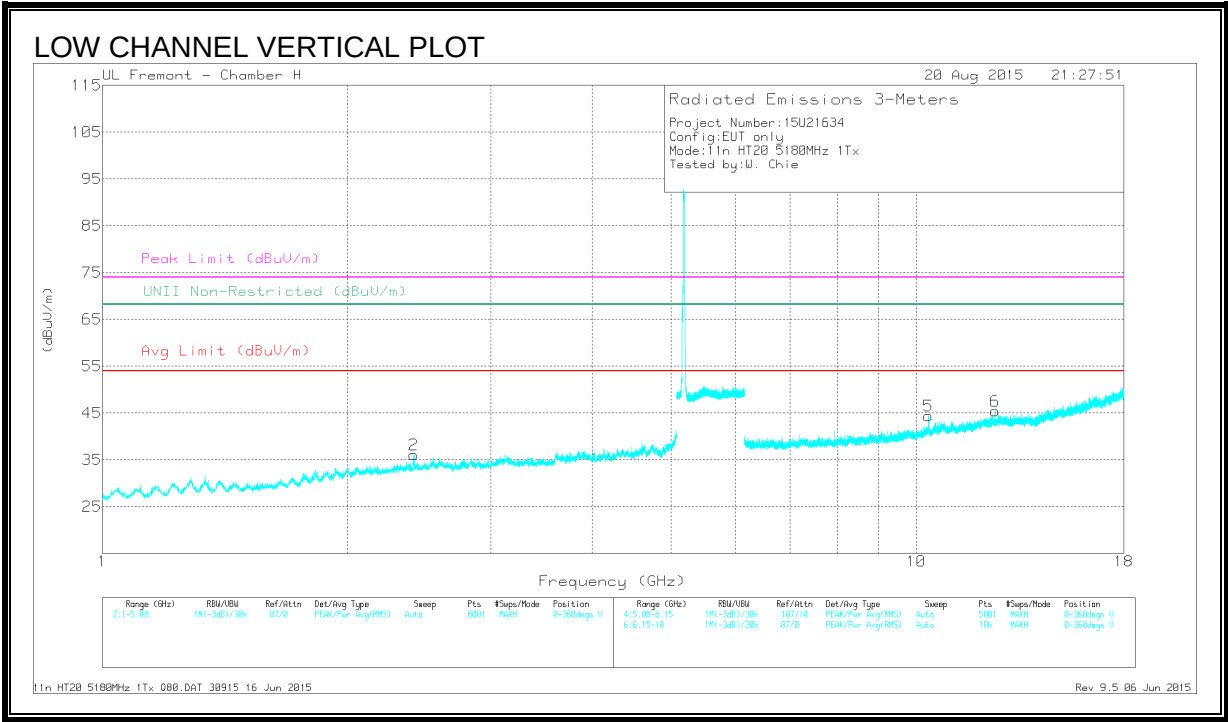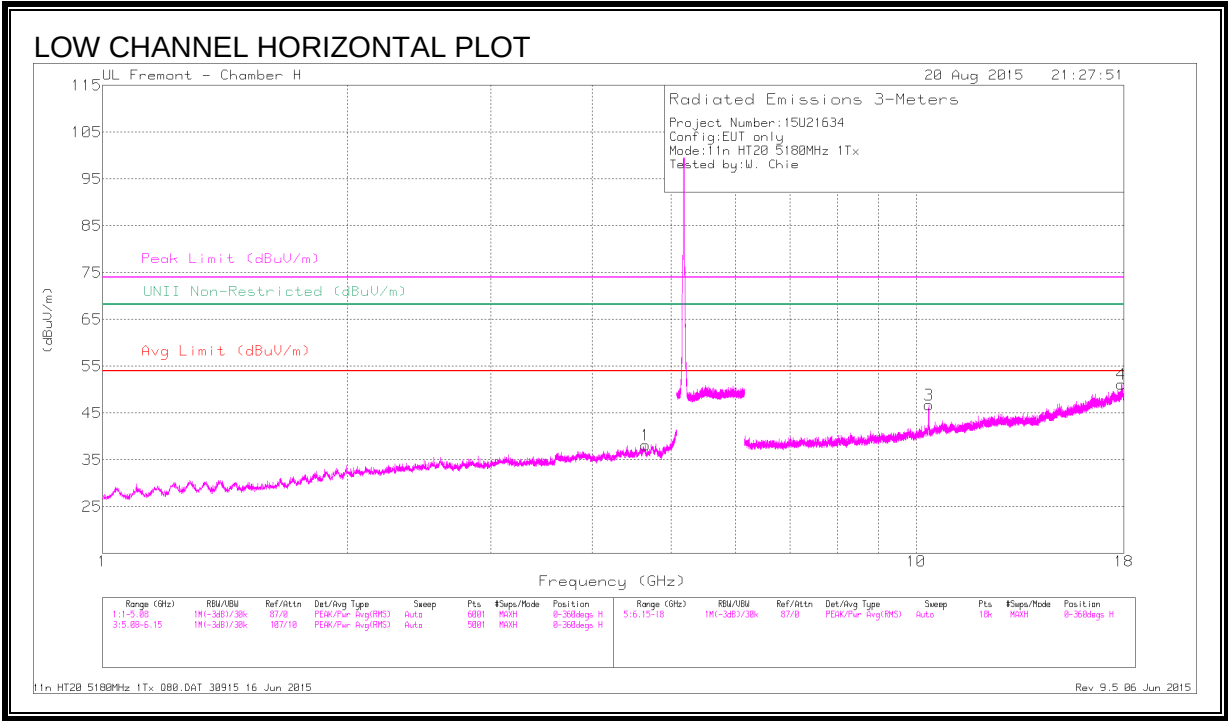

DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.651	41.55	PK3	34.1	-31.2	44.45	-	-	74	-29.55	-	-	41	294	H
	* 4.648	30.17	ADR	34.1	-31.2	33.07	54	-20.93	-	-	-	-	41	294	H
4	* 17.888	34.6	PK3	41.9	-19.4	57.1	-	-	74	-16.9	-	-	49	196	H
	* 17.886	22.79	ADR	41.9	-19.4	45.29	54	-8.71	-	-	-	-	49	196	H
6	* 12.503	36.41	PK3	39.3	-25.2	50.51	-	-	74	-23.49	-	-	324	376	V
	* 12.503	25.07	ADR	39.3	-25.2	39.17	54	-14.83	-	-	-	-	324	376	V
2	2.415	42.87	PK3	32.1	-33.1	41.87	-	-	-	-	68.2	-26.33	88	265	V
5	10.36	38.36	PK3	37.2	-25.2	50.36	-	-	-	-	68.2	-17.84	133	227	V
3	10.362	39.78	PK3	37.2	-25.1	51.88	-	-	-	-	68.2	-16.32	201	219	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK3 - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.598	41.7	PK3	34	-30.8	44.9	-	-	74	-29.1	-	-	183	170	H
	* 4.597	29.7	ADR	34	-30.8	32.9	54	-21.1	-	-	-	-	183	170	H
2	* 12.503	36.41	PK3	39.3	-25.2	50.51	-	-	74	-23.49	-	-	324	376	V
	* 12.503	25.07	ADR	39.3	-25.2	39.17	54	-14.83	-	-	-	-	324	376	V
4	6.053	43.93	PK3	35.3	-21	58.23	-	-	-	-	68.2	-9.97	216	177	V
3	6.065	42.5	PK3	35.3	-21	56.8	-	-	-	-	68.2	-11.4	186	209	H
6	10.399	41.2	PK3	37.3	-25.3	53.2	-	-	-	-	68.2	-15	185	164	V
5	10.404	37.99	PK3	37.3	-25.3	49.99	-	-	-	-	68.2	-18.21	272	194	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK3 - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL HARMONICS AND SPURIOUS EMISSIONS

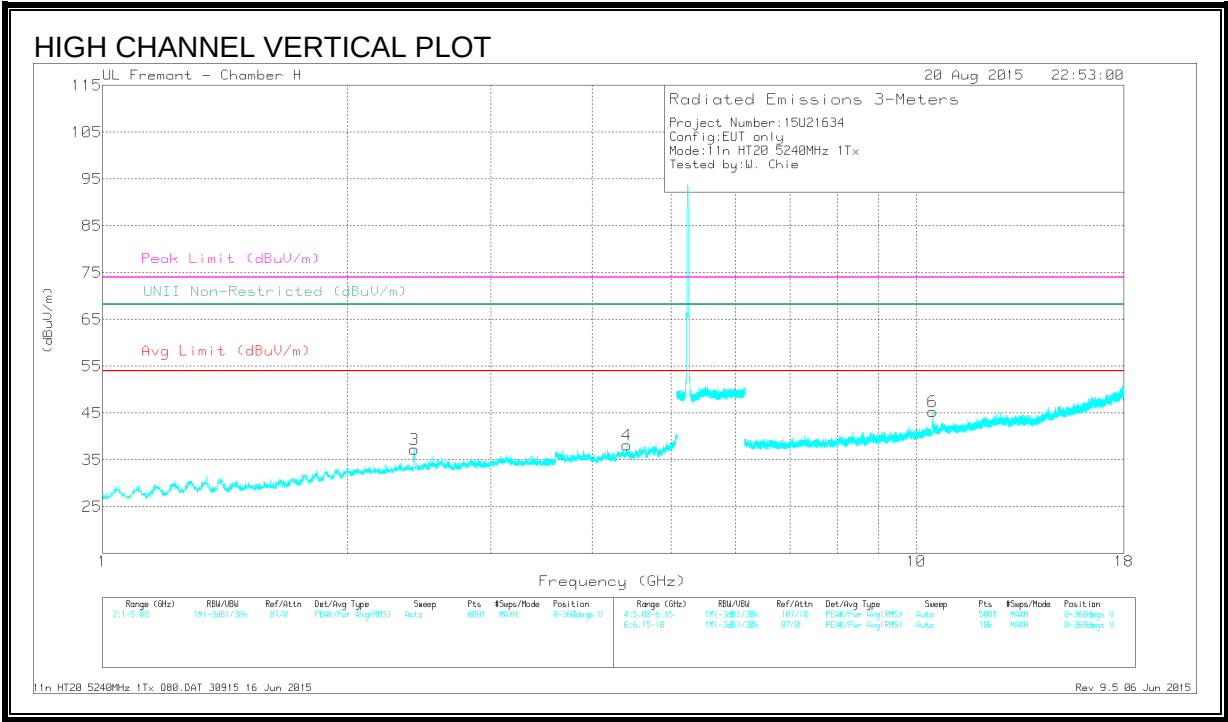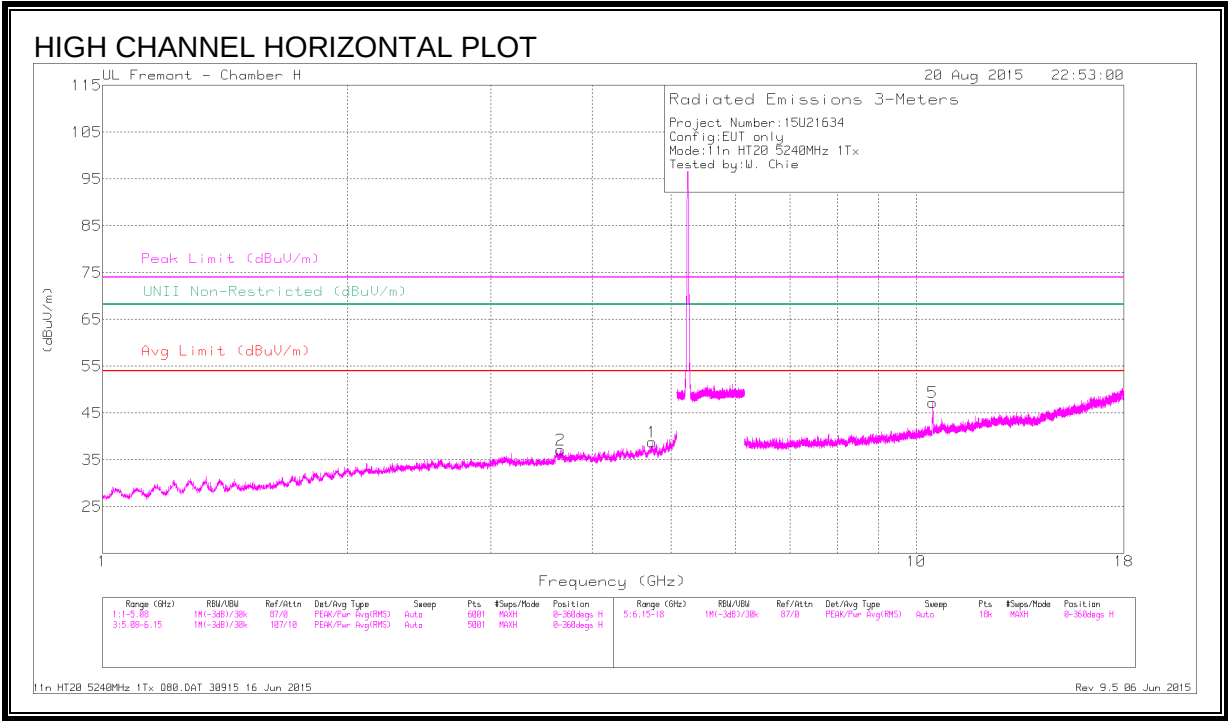

DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.734	41.41	PK3	34.2	-30.2	45.41	-	-	74	-28.59	-	-	221	369	H
	* 4.735	29.61	ADR	34.2	-30.2	33.61	54	-20.39	-	-	-	-	221	369	H
2	* 3.661	41.29	PK3	33.1	-31.2	43.19	-	-	74	-30.81	-	-	12	222	H
	* 3.659	29.94	ADR	33.1	-31.2	31.84	54	-22.16	-	-	-	-	12	222	H
3	2.418	43.15	PK3	32.1	-33.1	42.15	-	-	-	-	68.2	-26.05	68	199	V
4	4.409	41.53	PK3	33.7	-30.6	44.63	-	-	-	-	68.2	-23.57	105	218	V
6	10.474	36.78	PK3	37.4	-25.3	48.88	-	-	-	-	68.2	-19.32	181	213	V
5	10.481	37.96	PK3	37.4	-25.2	50.16	-	-	-	-	68.2	-18.04	136	198	H


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK3 - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

9.1.2. 802.11n HT40 1Tx MODE IN THE 5.2 GHz BAND

RESTRICTED BANDEDGE, CHAIN 0 (LOW CHANNEL)

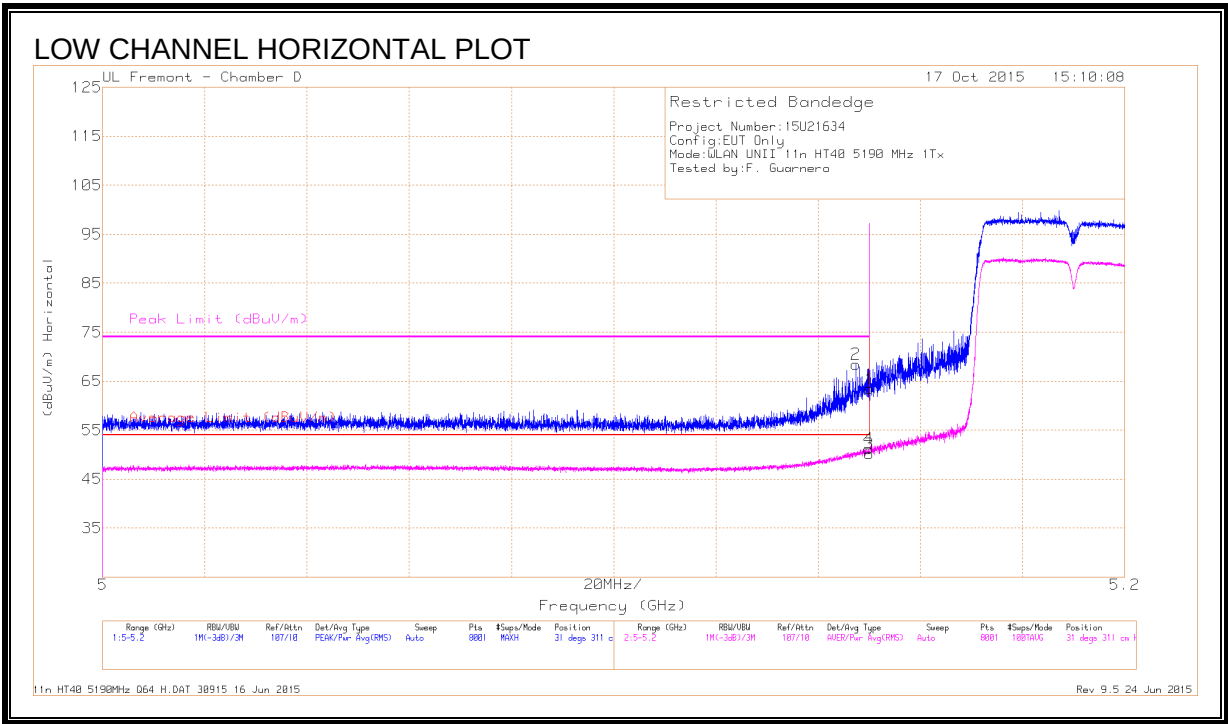

DATA


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.147	52.68	Pk	34.3	-18.5	68.48	-	-	74	-5.52	31	311	H
1	* 5.15	47.64	Pk	34.3	-18.5	63.44	-	-	74	-10.56	31	311	H
3	* 5.15	34.39	RMS	34.3	-18.5	50.19	54	-3.81	-	-	31	311	H
4	* 5.15	35.42	RMS	34.3	-18.5	51.22	54	-2.78	-	-	31	311	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection

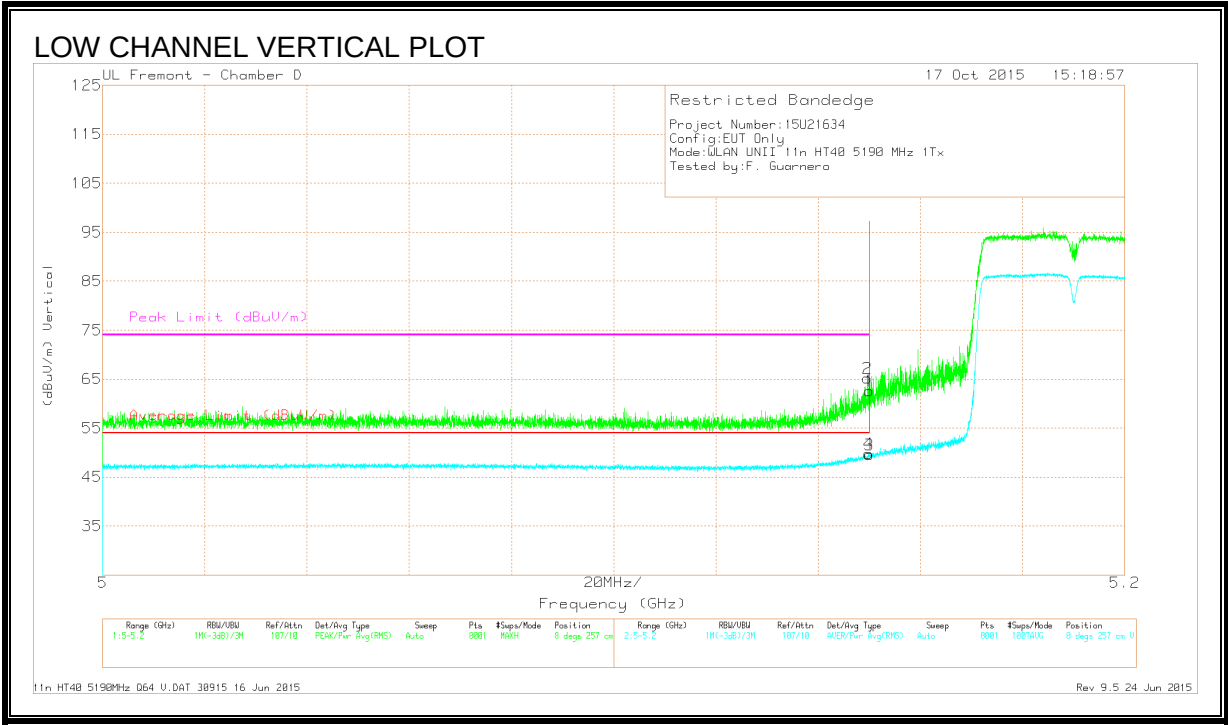

DATA

Trace Markers



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/ Filt/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.15	46.84	Pk	34.3	-18.5	62.64	-	-	74	-11.36	8	257	V
2	* 5.15	49.38	Pk	34.3	-18.5	65.18	-	-	74	-8.82	8	257	V
3	* 5.15	33.72	RMS	34.3	-18.5	49.52	54	-4.48	-	-	8	257	V
4	* 5.15	34.03	RMS	34.3	-18.5	49.83	54	-4.17	-	-	8	257	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection

LOW CHANNEL HARMONICS AND SPURIOUS EMISSIONS

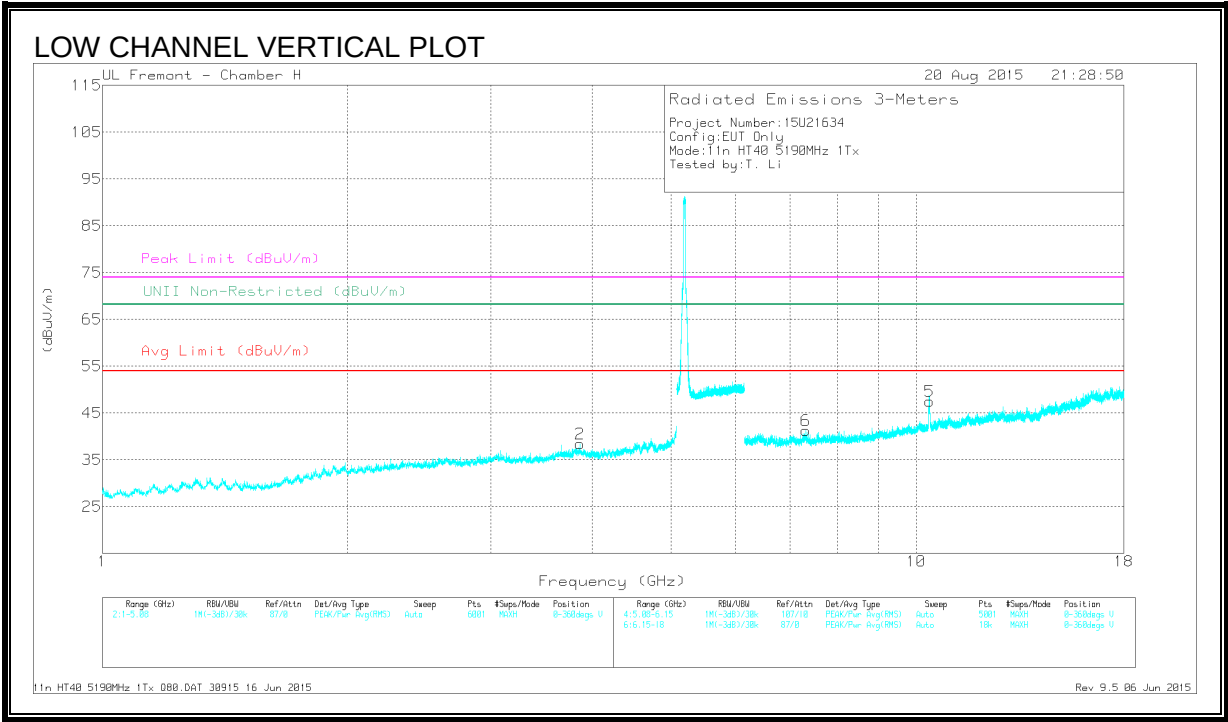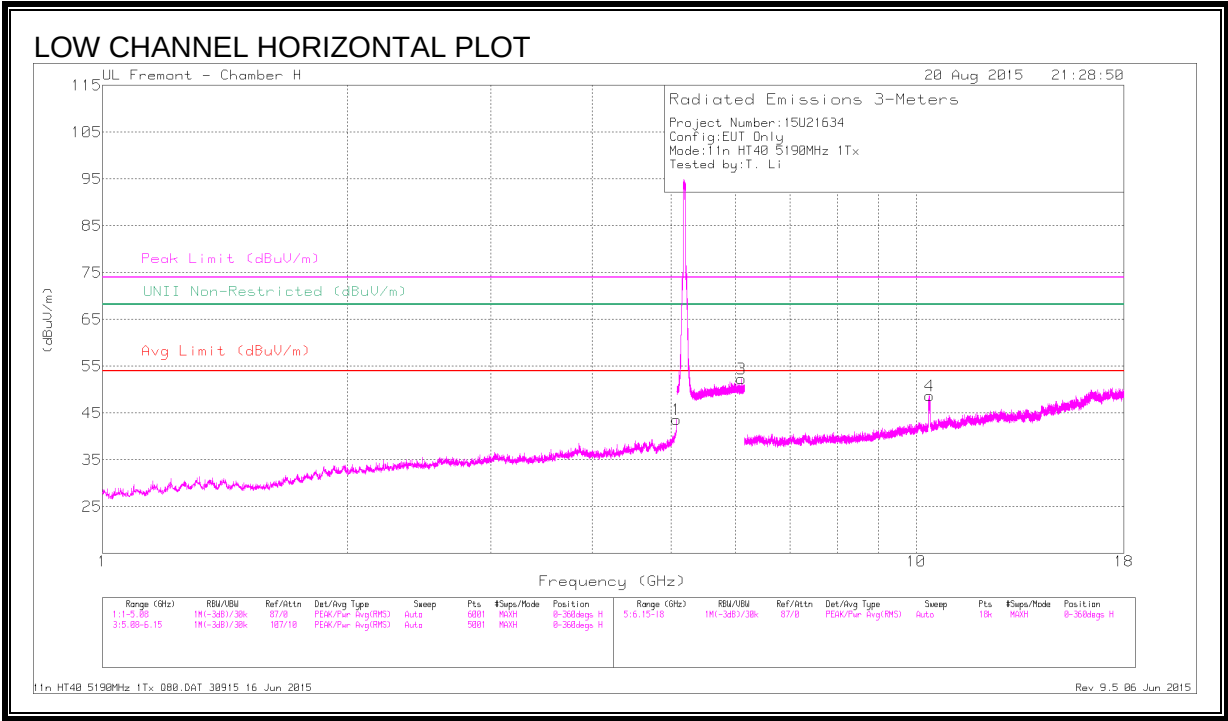

DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.079	46.86	PK3	34.2	-26.9	54.16	-	-	74	-19.84	-	-	331	385	H
	* 5.08	31.77	ADR	34.2	-26.9	39.07	54	-14.93	-	-	-	-	331	385	H
2	* 3.863	41.38	PK3	33.5	-29.9	44.98	-	-	74	-29.02	-	-	30	358	V
	* 3.861	29.69	ADR	33.5	-29.9	33.29	54	-20.71	-	-	-	-	30	358	V
6	* 7.322	37.71	PK3	35.5	-26.3	46.91	-	-	74	-27.09	-	-	330	345	V
	* 7.326	26.31	ADR	35.5	-26.4	35.41	54	-18.59	-	-	-	-	330	345	V
3	6.096	43.85	PK3	35.3	-19.7	59.45	-	-	-	-	68.2	-8.75	116	117	H
4	10.379	45.34	PK3	37.3	-23.8	58.84	-	-	-	-	68.2	-9.36	272	222	H
5	10.387	42.58	PK3	37.3	-23.6	56.28	-	-	-	-	68.2	-11.92	40	102	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK3 - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL HARMONICS AND SPURIOUS EMISSIONS

