


Transmitter Band Edge Radiated Emissions (5.725-5.85 GHz operation) (continued)**Results: 802.11ac / 80 MHz / BPSK / MCS0x1 / MIMO / Peak**

Frequency (MHz)	Level (dBm)	Limit (dBm/MHz)	Margin (dB)	Result
5639.103	-34.7	-27.0	7.7	Complied
5725	-19.2	27.0	46.2	Complied
5850	-24.2	27.0	51.2	Complied
5934.295	-37.4	-27.0	10.4	Complied

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result
5639.103	60.5	68.2	7.7	Complied
5725	76.0	122.2	46.2	Complied
5850	71.0	122.2	51.2	Complied
5934.295	57.8	68.2	10.4	Complied

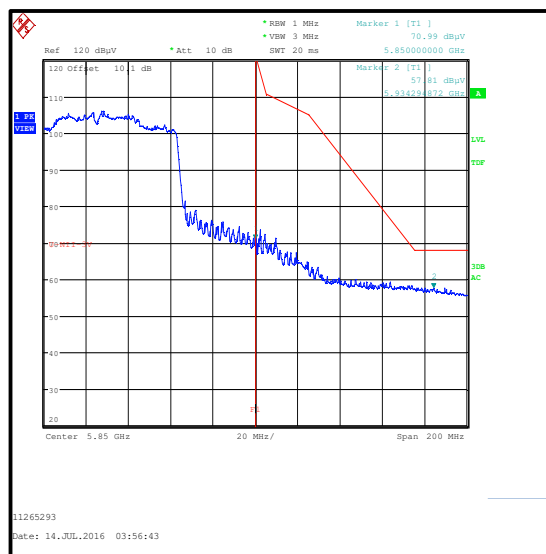

Transmitter Band Edge Radiated Emissions (continued)**Test Equipment Used:**

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M1656	Thermohygrometer	JM Handelspunkt	30.5015.13	Not stated	07 Apr 2017	12
K0002	3m RSE Chamber	Rainford EMC	N/A	N/A	21 Dec 2016	12
M1886	Test Receiver	Rohde & Schwarz	ESU26	100554	21 Mar 2017	12
A1534	Pre Amplifier	Hewlett Packard	8449B	3008A00405	19 Dec 2016	12
A253	Antenna	Flann Microwave	12240-20	128	17 Dec 2016	12
A1396	Attenuator	Huber & Suhner	6810.17.B	757987	26 Apr 2017	12
A2523	Attenuator	AtlanTecRF	AN18W5-10	832827#1	Calibrated before use	-
M1252	Signal Generator	Hewlett Packard	83640A	3119A00489	26 Oct 2017	24

6. Measurement Uncertainty

No measurement or test can ever be perfect and the imperfections give rise to error of measurement in the results. Consequently the result of a measurement is only an approximation to the value of the measurand (the specific quantity subject to measurement) and is only complete when accompanied by a statement of the uncertainty of the approximation.

The expression of uncertainty of a measurement result allows realistic comparison of results with reference values and limits given in specifications and standards.

The uncertainty of the result may need to be taken into account when interpreting the measurement results.

The reported expanded uncertainties below are based on a standard uncertainty multiplied by an appropriate coverage factor such that a confidence level of approximately 95% is maintained. For the purposes of this document "approximately" is interpreted as meaning "effectively" or "for most practical purposes".

Measurement Type	Range	Confidence Level (%)	Calculated Uncertainty
Maximum Conducted Output Power	5.15 GHz to 5.850 GHz	95%	± 1.13 dB
Maximum Power Spectral Density	5.15 GHz to 5.850 GHz	95%	± 1.13 dB
Minimum 6 dB Emission Bandwidth	5.15 GHz to 5.850 GHz	95%	± 4.59 %
26 dB Emission Bandwidth	5.15 GHz to 5.850 GHz	95%	± 4.59 %
Radiated Spurious Emissions	30 MHz to 1 GHz	95%	± 5.65 dB
Radiated Spurious Emissions	1 GHz to 40 GHz	95%	± 2.94 dB

The methods used to calculate the above uncertainties are in line with those recommended within the various measurement specifications. Where measurement specifications do not include guidelines for the evaluation of measurement uncertainty the published guidance of the appropriate accreditation body is followed.

7. Report Revision History

Version Number	Revision Details		
	Page No(s)	Clause	Details
1.0	-	-	Initial Version

--- END OF REPORT ---