



CERTIFICATION TEST REPORT

Report Number: 12607346-E1V2

Applicant : APPLE, INC.
1 APPLE PARK WAY
CUPERTINO, CA 95014, U.S.A.

Model : A2160, A2216, AND A2217

FCC ID : BCG-E3305A

IC : 579C-E3305A

EUT Description : SMARTPHONE

Test Standard(s) : FCC 47 CFR PART 15 SUBPART C
ISED RSS-247 ISSUE 2
ISED RSS-GEN ISSUE 5

Date Of Issue:
August 05, 2019

Prepared by:
UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538 U.S.A.
TEL: (510) 319-4000
FAX: (510) 661-0888



REPORT REVISION HISTORY

Rev.	Issue Date	Revisions	Revised By
V1	7/30/2019	Initial Issue	Chris Xiong
V2	8/5/2019	Address TCB Questions	Chris Xiong

TABLE OF CONTENTS

REPORT REVISION HISTORY	2
TABLE OF CONTENTS	3
1. ATTESTATION OF TEST RESULTS	6
2. TEST METHODOLOGY	7
3. FACILITIES AND ACCREDITATION	7
4. CALIBRATION AND UNCERTAINTY	7
4.1. MEASURING INSTRUMENT CALIBRATION	7
4.2. SAMPLE CALCULATION	7
4.3. MEASUREMENT UNCERTAINTY.....	8
5. EQUIPMENT UNDER TEST	9
5.1. EUT DESCRIPTION	9
5.2. DIFFERENCE IN MODEL NUMBER.....	9
5.3. MAXIMUM OUTPUT POWER.....	9
5.4. DESCRIPTION OF AVAILABLE ANTENNAS	9
5.5. SOFTWARE AND FIRMWARE.....	10
5.6. WORST-CASE CONFIGURATION AND MODE.....	10
5.7. DESCRIPTION OF TEST SETUP.....	11
6. TEST AND MEASUREMENT EQUIPMENT	16
7. MEASUREMENT METHODS	17
8. ANTENNA PORT TEST RESULTS	18
8.1. ON TIME AND DUTY CYCLE.....	18
8.2. 20 dB AND 99% BANDWIDTH	20
8.2.1. HIGH POWER BASIC DATA RATE GFSK MODULATION.....	21
8.2.2. HIGH POWER ENHANCED DATA RATE 8PSK MODULATION	23
8.2.3. LOW POWER BASIC DATA RATE GFSK MODULATION.....	25
8.2.4. LOW POWER ENHANCED DATA RATE 8PSK MODULATION	27
8.3. BEAMFORMING 20 dB AND 99% BANDWIDTH.....	29
8.3.1. HIGH POWER BASIC DATA RATE GFSK MODULATION.....	29
8.3.2. HIGH POWER ENHANCED DATA RATE 8PSK MODULATION	31
8.3.3. LOW POWER BASIC DATA RATE GFSK MODULATION.....	33
8.3.4. LOW POWER ENHANCED DATA RATE 8PSK MODULATION	35
8.4. HOPPING FREQUENCY SEPARATION	37
8.4.1. HIGH POWER BASIC DATA RATE GFSK MODULATION.....	38
8.4.2. HIGH POWER ENHANCED DATA RATE 8PSK MODULATION	38
8.4.3. LOW POWER BASIC DATA RATE GFSK MODULATION.....	39
8.4.4. LOW POWER ENHANCED DATA RATE 8PSK MODULATION	39

8.5.	BEAMFORMING HOPPING FREQUENCY SEPARATION.....	40
8.5.1.	HIGH POWER BASIC DATA RATE GFSK MODULATION.....	41
8.5.2.	HIGH POWER ENHANCED DATA RATE 8PSK MODULATION	41
8.5.3.	LOW POWER BASIC DATA RATE GFSK MODULATION.....	42
8.5.4.	LOW POWER ENHANCED DATA RATE 8PSK MODULATION	42
8.6.	NUMBER OF HOPPING CHANNELS.....	43
8.6.1.	HIGH POWER BASIC DATA RATE GFSK MODULATION.....	44
8.6.2.	HIGH POWER ENHANCED DATA RATE 8PSK MODULATION	46
8.6.3.	LOW POWER BASIC DATA RATE GFSK MODULATION.....	48
8.6.4.	LOW POWER ENHANCED DATA RATE 8PSK MODULATION	50
8.7.	BEAMFORMING NUMBER OF HOPPING CHANNELS	52
8.7.1.	HIGH POWER BASIC DATA RATE GFSK MODULATION.....	53
8.7.2.	HIGH POWER ENHANCED DATA RATE 8PSK MODULATION	55
8.7.3.	LOW POWER BASIC DATA RATE GFSK MODULATION.....	57
8.7.4.	LOW POWER ENHANCED DATA RATE 8PSK MODULATION	59
8.8.	AVERAGE TIME OF OCCUPANCY.....	61
8.8.1.	HIGH POWER BASIC DATA RATE GFSK MODULATION.....	62
8.8.2.	HIGH POWER ENHANCED DATA RATE 8PSK MODULATION	66
8.8.3.	LOW POWER BASIC DATA RATE GFSK MODULATION.....	70
8.8.4.	LOW POWER ENHANCED DATA RATE 8PSK MODULATION	74
8.9.	BEAMFORMING AVERAGE TIME OF OCCUPANCY.....	78
8.9.1.	HIGH POWER BASIC DATA RATE GFSK MODULATION.....	79
8.9.2.	HIGH POWER ENHANCED DATA RATE 8PSK MODULATION	83
8.9.3.	LOW POWER BASIC DATA RATE GFSK MODULATION.....	87
8.9.4.	LOW POWER ENHANCED DATA RATE 8PSK MODULATION	91
8.10.	OUTPUT POWER.....	95
8.10.1.	HIGH POWER BASIC DATA RATE GFSK MODULATION	96
8.10.2.	HIGH POWER ENHANCED DATA RATE QPSK MODULATION	97
8.10.3.	HIGH POWER ENHANCED DATA RATE 8PSK MODULATION.....	98
8.10.4.	LOW POWER BASIC DATA RATE GFSK MODULATION	99
8.10.5.	LOW POWER ENHANCED DATA RATE QPSK MODULATION.....	100
8.10.6.	LOW POWER ENHANCED DATA RATE 8PSK MODULATION	101
8.11.	BEAMFORMING OUTPUT POWER	102
8.11.1.	HIGH POWER BASIC DATA RATE GFSK MODULATION	102
8.11.2.	HIGH POWER ENHANCED DATA RATE QPSK MODULATION	102
8.11.3.	HIGH POWER ENHANCED DATA RATE 8PSK MODULATION.....	102
8.11.4.	LOW POWER BASIC DATA RATE GFSK MODULATION	103
8.11.5.	LOW POWER ENHANCED DATA RATE QPSK MODULATION.....	103
8.11.6.	LOW POWER ENHANCED DATA RATE 8PSK MODULATION	103
8.12.	AVERAGE POWER	104
8.12.1.	HIGH POWER BASIC DATA RATE GFSK MODULATION	105
8.12.2.	HIGH POWER ENHANCED DATA RATE QPSK MODULATION	106
8.12.3.	HIGH POWER ENHANCED DATA RATE 8PSK MODULATION.....	107
8.12.4.	LOW POWER BASIC DATA RATE GFSK MODULATION	108
8.12.5.	LOW POWER ENHANCED DATA RATE QPSK MODULATION.....	109
8.12.6.	LOW POWER ENHANCED DATA RATE 8PSK MODULATION	110
8.13.	BEAMFORMING AVERAGE POWER.....	111
8.13.1.	HIGH POWER BASIC DATA RATE GFSK MODULATION	111
8.13.2.	HIGH POWER ENHANCED ENHANCED RATE QPSK MODULATION	111

8.13.3.	HIGH POWER ENHANCED DATA RATE 8PSK MODULATION.....	111
8.13.4.	LOW POWER BASIC DATA RATE GFSK MODULATION	112
8.13.5.	LOW POWER ENHANCED DATA RATE QPSK MODULATION.....	112
8.13.6.	LOW POWER ENHANCED DATA RATE 8PSK MODULATION	112
8.14.	CONDUCTED SPURIOUS EMISSIONS	113
8.14.1.	HIGH POWER BASIC DATA RATE GFSK MODULATION	114
8.14.2.	HIGH POWER ENHANCED DATA RATE 8PSK MODULATION.....	118
8.14.3.	LOW POWER BASIC DATA RATE GFSK MODULATION	122
8.14.4.	LOW POWER ENHANCED DATA RATE 8PSK MODULATION	126
8.15.	BEAMFORMING CONDUCTED SPURIOUS EMISSIONS.....	130
8.15.1.	HIGH POWER BASIC DATA RATE GFSK MODULATION	130
8.15.2.	HIGH POWER ENHANCED DATA RATE 8PSK MODULATION.....	134
8.15.3.	LOW POWER BASIC DATA RATE GFSK MODULATION	138
8.15.4.	LOW POWER ENHANCED DATA RATE 8PSK MODULATION	142
9.	RADIATED TEST RESULTS.....	146
9.1.	TRANSMITTER ABOVE 1 GHz.....	148
9.1.1.	ANTENNA 4, HIGH POWER BASIC DATA RATE GFSK MODULATION	148
9.1.2.	ANTENNA 3, HIGH POWER BASIC DATA RATE GFSK MODULATION	158
9.1.3.	ANTENNA 4, HIGH POWER ENHANCED DATA RATE 8PSK MODULATION	168
9.1.4.	ANTENNA 3, HIGH POWER ENHANCED DATA RATE 8PSK MODULATION	178
9.1.5.	ANTENNA 4, LOW POWER BASIC DATA RATE GFSK MODULATION	188
9.1.6.	ANTENNA 3, LOW POWER BASIC DATA RATE GFSK MODULATION	198
9.1.7.	ANTENNA 4, LOW POWER ENHANCED DATA RATE 8PSK MODULATION	208
9.1.8.	ANTENNA 3, LOW POWER ENHANCED DATA RATE 8PSK MODULATION	218
9.2.	BEAMFORMING TRANSMITTER ABOVE 1 GHz.....	228
9.2.1.	HIGH POWER BASIC DATA RATE GFSK MODULATION.....	228
9.2.2.	HIGH POWER ENHANCED DATA RATE 8PSK MODULATION	238
9.2.3.	LOW POWER BASIC DATA RATE GFSK MODULATION.....	248
9.2.4.	LOW POWER ENHANCED DATA RATE 8PSK MODULATION	258
9.3.	WORST CASE BELOW 1 GHZ.....	268
9.4.	WORST CASE 18-26 GHZ	270
10.	AC POWER LINE CONDUCTED EMISSIONS	272
10.1.	AC Power Line Host	273
10.2.	AC Power Line Norm.....	275
11.	SETUP PHOTOS	277

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: APPLE, INC.
1 APPLE PARK WAY
CUPERTINO, CA 95014, U.S.A.

EUT DESCRIPTION: SMARTPHONE

MODEL: A2160, A2216, AND A2217

SERIAL NUMBER: C39YV06TN2R5, C39YT06WN2R0

DATE TESTED: APRIL 16, 2019 – AUGUST 01, 2019

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Complies
ISED RSS-247 Issue 2	Complies
ISED RSS-GEN Issue 5	Complies

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise.

This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of the U.S. government.

Approved & Released For
UL Verification Services Inc. By:



Chin Pang
Senior Engineer
Consumer Technology Division
UL Verification Services Inc.

Prepared By:



Tony Li
Test Engineer
Consumer Technology Division
UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, ANSI C63.10-2013, RSS-GEN Issue 5, KDB 558074 D01v05r02 and RSS-247 Issue 2.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, and 47658 Kato Road, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street	47658 Kato Rd
☐ Chamber A (ISED:2324B-1)	☒ Chamber D (ISED:22541-1)	☐ Chamber I (ISED:2324A-5)
☒ Chamber B (ISED:2324B-2)	☒ Chamber E (ISED:22541-2)	☐ Chamber J (ISED:2324A-6)
☐ Chamber C (ISED:2324B-3)	☐ Chamber F (ISED:22541-3)	☐ Chamber K (ISED:2324A-1)
	☒ Chamber G (ISED:22541-4)	☐ Chamber L (ISED:2324A-3)
	☐ Chamber H (ISED:22541-5)	

The above test sites and facilities are covered under FCC Test Firm Registration # 208313. Chambers above are covered under Industry Canada company address and respective code

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

RADIATED EMISSIONS

Where relevant, the following sample calculation is provided:

Field Strength (dBuV/m) = Measured Voltage (dBuV) + Antenna Factor (dB/m) + Cable Loss (dB) – Preamp Gain (dB)
 $36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} = 28.9 \text{ dBuV/m}$

MAINS CONDUCTED EMISSIONS

Where relevant, the following sample calculation is provided:

Final Voltage (dBuV) = Measured Voltage (dBuV) + Cable Loss (dB) + Limiter Factor (dB) + LISN Insertion Loss.
 $36.5 \text{ dBuV} + 0 \text{ dB} + 10.1 \text{ dB} + 0 \text{ dB} = 46.6 \text{ dBuV}$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Worst Case Conducted Disturbance, 9KHz to 0.15 MHz	3.84 dB
Worst Case Conducted Disturbance, 0.15 to 30 MHz	3.65 dB
Worst Case Radiated Disturbance, 9KHz to 30 MHz	2.52 dB
Worst Case Radiated Disturbance, 30 to 1000 MHz	4.88 dB
Worst Case Radiated Disturbance, 1000 to 18000 MHz	4.24 dB
Worst Case Radiated Disturbance, 18000 to 26000 MHz	4.37 dB
Worst Case Radiated Disturbance, 26000 to 40000 MHz	5.17 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. EUT DESCRIPTION

EUT is a smartphone with multimedia functions (music, application support, and video), cellular GSM, GPRS, EGPRS, UMTS, LTE, TD-SCDMA, CDMA, IEEE 802.11a/b/g/n/ac/ax, Bluetooth, Ultra-Wide band, GPS and NFC. All models support at least one UICC based SIM. The second SIM, if present, is either UICC based pSIM (physical SIM) or e-SIM (electronic SIM). The device has a built-in inductive charging receiver. The rechargeable battery is also not user accessible.

5.2. DIFFERENCE IN MODEL NUMBER

Model A2160, A2216 and A2217 is electrically identical to Model A2160. Three model numbers are allocated for marketing and logistic purposes only. A2160 was used to perform all final tests.

5.3. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Antenna	Config	Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
Antenna 4	High Power	2402 - 2480	Basic GFSK	16.51	44.77
		2402 - 2480	DQPSK	18.46	70.15
		2402 - 2480	Enhanced 8PSK	18.58	72.11
	Low Power	2402 - 2480	Basic GFSK	12.57	18.07
		2402 - 2480	DQPSK	11.39	13.77
		2402 - 2480	Enhanced 8PSK	11.41	13.84
Antenna 3	High Power	2402 - 2480	Basic GFSK	19.54	89.95
		2402 - 2480	DQPSK	18.41	69.34
		2402 - 2480	Enhanced 8PSK	18.57	71.94
	Low Power	2402 - 2480	Basic GFSK	12.59	18.16
		2402 - 2480	DQPSK	11.51	14.16
		2402 - 2480	Enhanced 8PSK	11.40	13.80
BF, Antenna 4 + Antenna 3	High Power	2402 - 2480	Basic GFSK TxBF	19.76	94.62
		2402 - 2480	DQPSK TxBF	20.57	114.02
		2402 - 2480	Enhanced 8PSK TxBF	20.59	114.55
	Low Power	2402 - 2480	Basic GFSK TxBF	15.62	36.48
		2402 - 2480	DQPSK TxBF	14.47	27.99
		2402 - 2480	Enhanced 8PSK TxBF	14.53	28.38

5.4. DESCRIPTION OF AVAILABLE ANTENNAS

Frequency Range (GHz)	Ant. 4 (Core 0) (dBi)	Ant. 3 (Core 1) (dBi)
2.4	-1.7	-1.9

5.5. SOFTWARE AND FIRMWARE

The EUT firmware installed during testing was FW Version: 17.1.140.1283.

5.6. WORST-CASE CONFIGURATION AND MODE

The EUT was investigated in three orthogonal orientations X, Y and Z on Ant 4 (Core 0) and Ant 3 (Core 1). It was determined that X (Flatbed) orientation was the worst-case orientation for Ant 4, Ant 3 and 2TX beamforming mode.

Radiated band edge, harmonic, and spurious emissions from 1GHz to 18GHz were performed with the EUT was set to transmit at highest power on Low/Middle/High channels.

Radiated emissions below 30MHz, below 1GHz, 18-26GHz and power line conducted emissions were performed with the EUT transmits at the channel with the highest output power as worst-case scenario

For below 1GHz tests EUT was connected to AC power adapter as the worst case; and for above 1GHz, the worst-case configuration reported was tested with EUT only. There were no emissions found below 30MHz within 20dB of the limit. For AC line conducted emission, test was investigated with AC power adapter and with laptop.

For simultaneous transmission of multiple channels in the 2.4GHz BT and 5GHz bands, No noticeable emission was found.

Worst-case data rates as provided by the client were:

GFSK mode: DH5
8PSK mode: 3-DH5
Beamforming, GFSK, DH5
Beamforming, 8PSK, 3-DH5

Bluetooth RF output path is switched when the power exceeds 11dBm. Measurements were made therefore at the maximum power setting (with amplifier switched in) and also at the 11dBm power level (amplifier switched out) , and they are the high power and low power modes documented in this report respectively.

There are two vendors of the WiFi/Bluetooth radio modules: variant 1 and variant 2. The Wi-Fi/Bluetooth radio modules have the same mechanical outline (e.g., the same package dimension and pin-out layout), use the same on-board antenna matching circuit, have an identical antenna structure, and are built and tested to conform to the same specifications and to operate within the same tolerances.

Baseline testing was performed on the two variants to determine the worst case on all conducted power and radiated emissions.

5.7. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
laptop	Apple	A1502	HRP003436	QDS-BRCM1080
Laptop AC/DC adapter	Liteon Technology	PA-1450-BA1	B123	NA
EUT AC Adapter	Apple	A1385	D29325SM03XDHLHC9	NA

I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	Antenna	1	SMA	Un-Shielded	0.2	To spectrum Analyzer
2	USB	1	USB	Shielded	1	N/A
3	AC	1	AC	Un-shielded	2	N/A


I/O CABLES (BELOW 1GHz AND AC POWER LINE TEST WITH ADAPTER AND LAPTOP)

I/O Cable List						
Cable No	Port	# of identical	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	1	AC	Un-shielded	2	N/A
2	USB	1	USB	Un-shielded	1	N/A


TEST SETUP

The EUT is connected to a test laptop during the tests. Test software exercised the radio card.


SETUP DIAGRAM FOR CONDUCTED TESTS

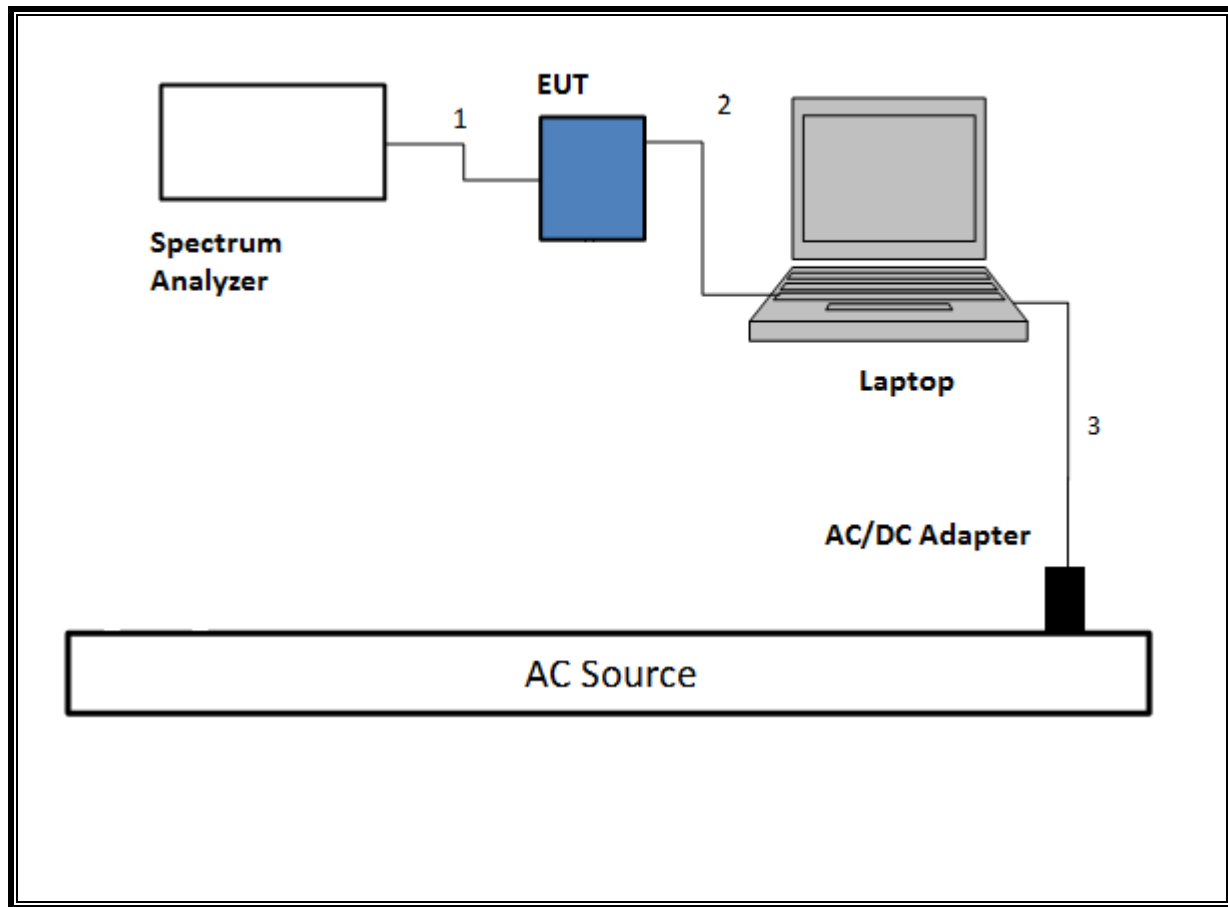


SETUP DIAGRAM FOR RADIATED TESTS Above 1GHz

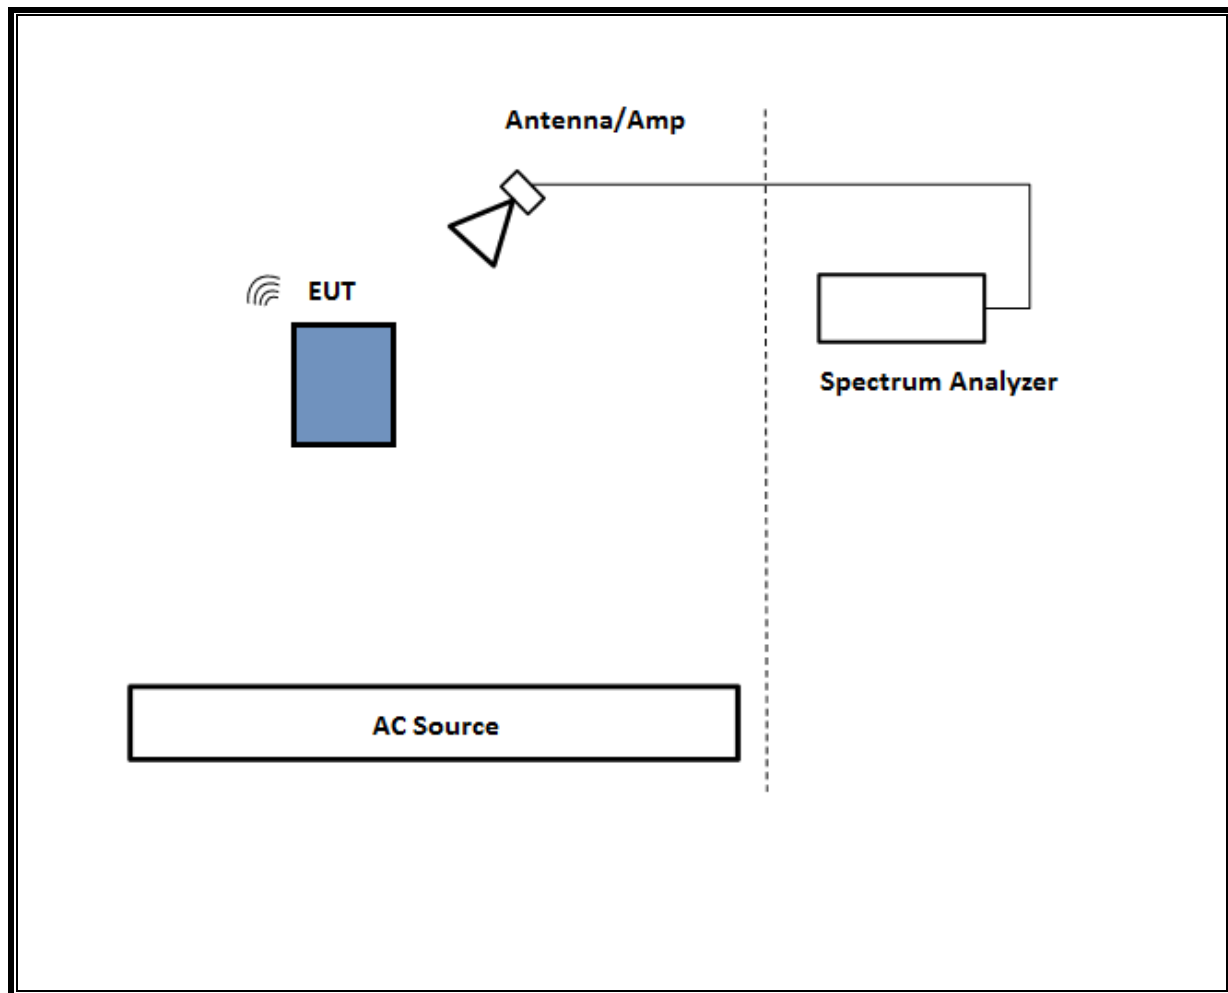

SETUP DIAGRAM FOR BELOW 1GHz and AC LINE CONDUCTED TEST

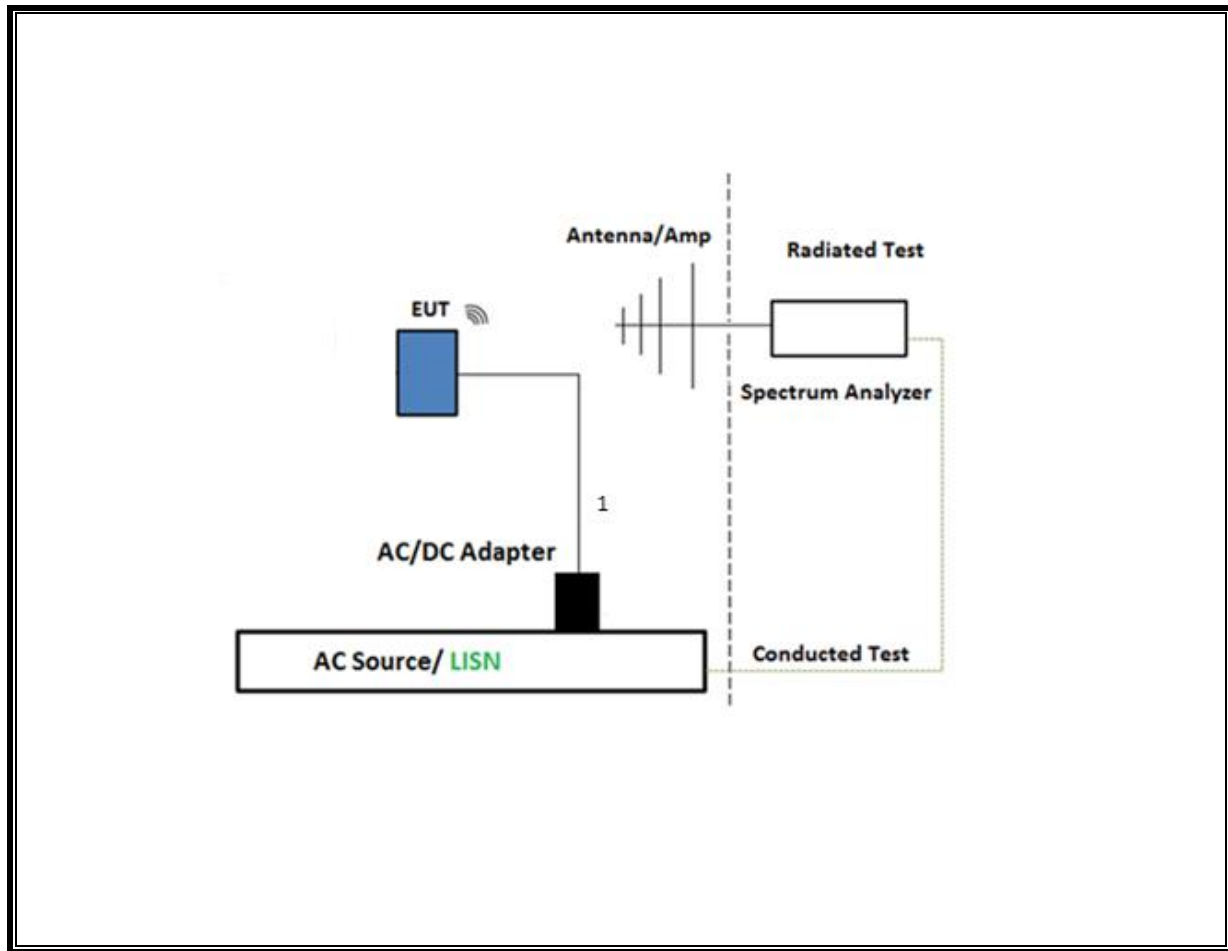

TEST SETUP- AC LINE CONDUCTED: LAPTOP CONFIGURATION

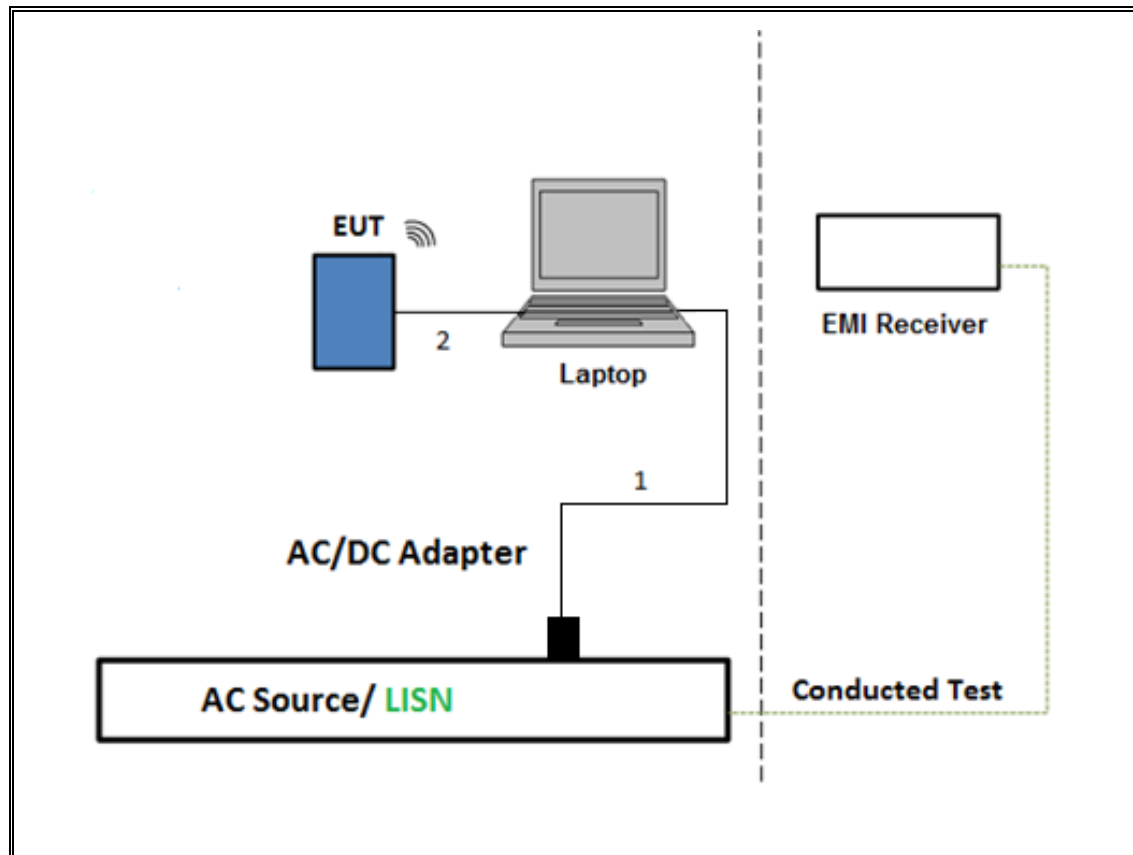

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST					
Description	Manufacturer	Model	ID Num	Cal Due	Last Cal
Antenna, Horn 1-18GHz	ETS Lindgren	3117	T712	02/26/2020	02/26/2019
Amplifier, 1 to 18GHz	Miteq	AFS42-00101800-25-S-42	138301	09/15/2019	09/15/2018
Spectrum Analyzer, PXA 3Hz to 44GHz	Keysight	N9030A	T907	01/20/2020	01/20/2019
Antenna, Horn 1-18GHz	ETS Lindgren	3117	T136	06/14/2020	06/14/2019
Amplifier, 1 to 18GHz, 35dB	Amplical	AFS42-00101800-25-S-42	T1567	01/26/2020	01/26/2019
*Antenna, Horn 1-18GHz	ETS Lindgren	3117	T120	07/02/2019	07/02/2018
Amplifier, 1 to 18GHz	Miteq	AFS42-00101800-25-S-42	T491	05/30/2020	05/30/2018
Spectrum Analyzer, PXA 3Hz to 44GHz	Keysight	N9030A-544	T1210	08/06/2019	08/06/2018
Antenna, Horn 1-18GHz	ETS Lindgren	3117	T119	03/22/2020	03/22/2019
Amplifier, 1 to 18GHz	Miteq	AFS42-00101800-25-S-42	T740	10/06/2019	10/06/2018
Spectrum Analyzer, PXA 3Hz to 44GHz	Keysight	N9030A	T905	01/24/2020	01/24/2019
*Antenna Horn, 18 to 26GHz	ARA	MWH-1826	T447	06/16/2019	06/16/2018
Pre-Amp 18-26GHz	Agilent Technology	8449B	T404	03/23/2020	03/23/2019
*Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent (Keysight) Technologies	N9030A	T459	07/25/2019	07/25/2018
Power Meter, P-series single channel	Keysight	N1912A	T1244	01/30/2020	01/30/2019
Power Sensor	Keysight	N1921A	T1224	02/22/2020	02/22/2019
Antenna, Active Loop 9KHz to 30MHz	EMCO	6502	T35	06/06/2020	06/06/2019
Antenna, Broadband Hybrid, 30MHz to 3GHz	SunAR rf motion	JB3	PRE0184052	10/24/2019	10/24/2018
Amplifier, 9KHz to 1GHz, 32dB	SONOMA INSTRUMENT	310	PRE0186650	12/13/2019	12/13/2018
AC Line Conducted					
EMI Test Receiver 9KHz-7GHz	Rohde & Schwarz	ESCI7	T1436	02/14/2020	02/14/2019
Power Cable, Line Conducted Emissions	UL	PG1	T861	08/31/2019	08/31/2018
*LISN for Conducted Emissions CISPR-16	Fischer	50/250-25-2-01	T1310	06/19/2019	06/19/2018
UL AUTOMATION SOFTWARE					
Radiated Software	UL	UL EMC	Ver 9.5, April 26, 2016		
Conducted Software	UL	UL EMC	Ver 5.4, October 13, 2016		
AC Line Conducted Software	UL	UL EMC	Ver 9.5, May 26, 2015		

*Testing is completed before equipment expiration date.

7. MEASUREMENT METHODS

On Time and Duty Cycle: ANSI C63.10-2013 Section 11.6

Occupied BW (20dB): ANSI C63.10-2013 Section 6.9.2

Occupied BW (99%): ANSI C63.10-2013 Section 6.9.3

Carrier Frequency Separation: ANSI C63.10-2013 Section 7.8.2

Number of Hopping Frequencies: ANSI C63.10-2013 Section 7.8.3

Time of Occupancy (Dwell Time): ANSI C63.10-2013 Section 7.8.4

Peak Output Power: ANSI C63.10-2013 Section 7.8.5

Conducted Spurious Emissions: ANSI C63.10-2013 Section 7.8.8

Conducted Band-Edge: ANSI C63.10-2013 Section 6.10.4

Radiated Spurious Emissions Below 30MHz: ANSI C63.10-2013 Section 6.4

Radiated Spurious Emissions 30-1000MHz: ANSI C63.10-2013 Section 6.3 and 6.5

Radiated Spurious Emissions above 1GHz: ANSI C63.10-2013 Section 6.3 and 6.6

Radiated Band-edge: ANSI C63.10-2013 Section 6.10.5

AC Power-line conducted emissions: ANSI C63.10-2013, Section 6.2.

8. ANTENNA PORT TEST RESULTS

8.1. ON TIME AND DUTY CYCLE

LIMITS

None; for reporting purposes only.


PROCEDURE

ANSI C63.10, Section 11.6 : Zero-Span Spectrum Analyzer Method.

ON TIME AND DUTY CYCLE RESULTS

Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T Minimum VBW (kHz)
Bluetooth GFSK	1.00	1.00	1.000	100.0%	0.00	0.010
Bluetooth 8PSK	1.00	1.00	1.000	100.0%	0.00	0.010
Bluetooth GFSK TxBF	1.00	1.00	1.000	100.0%	0.00	0.010
Bluetooth 8PSK TxBF	1.00	1.00	1.000	100.0%	0.00	0.010

DUTY CYCLE PLOTS

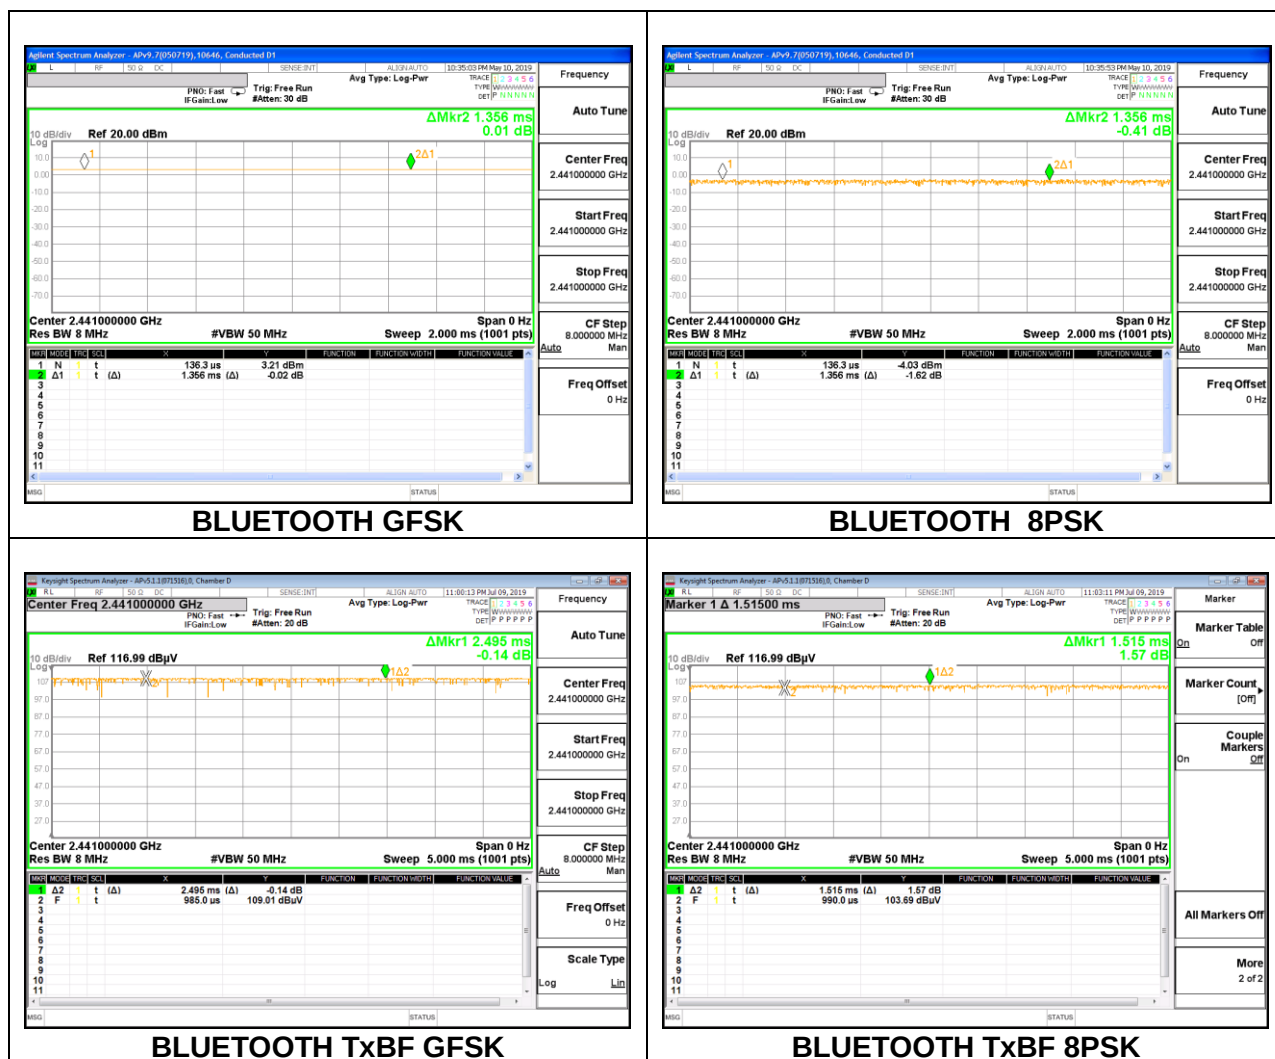

8.2. 20 dB AND 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to $\geq 1\%$ of the 20 dB bandwidth. The VBW is set to 3x RBW The sweep time is coupled.

RESULTS


8.2.1. HIGH POWER BASIC DATA RATE GFSK MODULATION

Antenna 4


Channel	Frequency (MHz)	20dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	2402	0.8879	0.86817
Mid	2441	0.8886	0.86821
High	2480	0.8873	0.86738

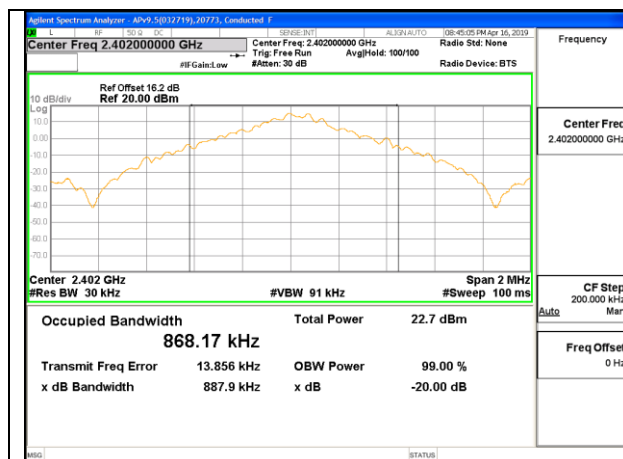

LOW CHANNEL

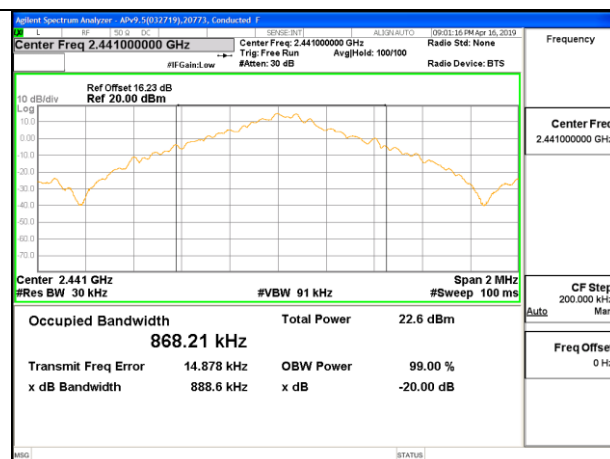


MID CHANNEL

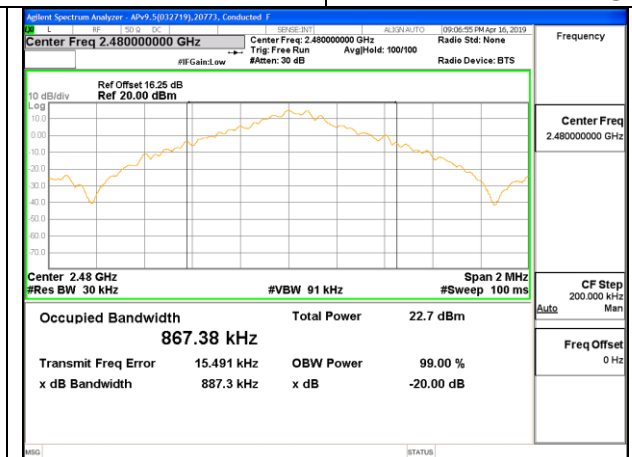


HIGH CHANNEL

Antenna 3


Channel	Frequency (MHz)	20dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	2402	0.9218	0.87180
Mid	2441	0.8893	0.87167
High	2480	0.8870	0.86988

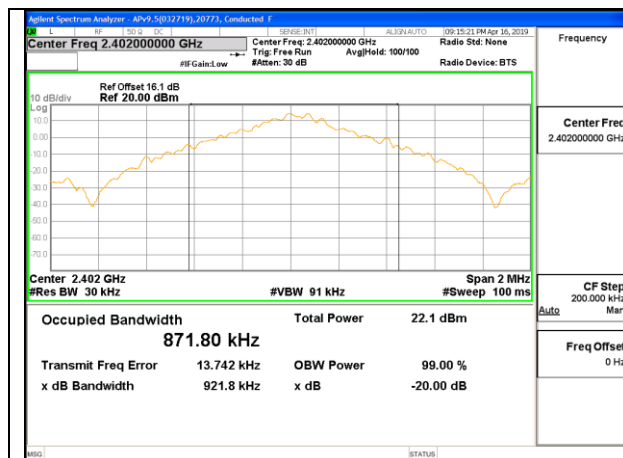

LOW CHANNEL

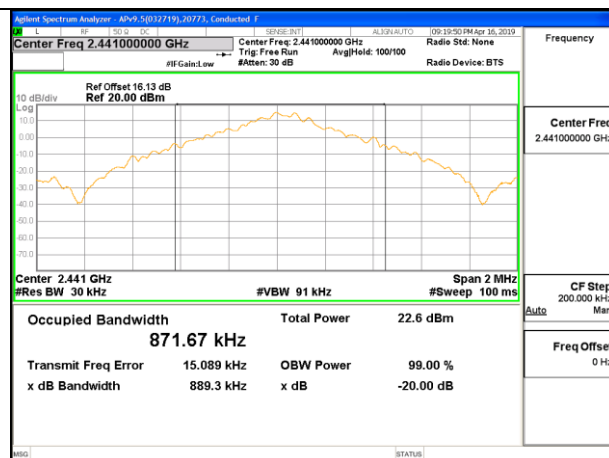

MID CHANNEL

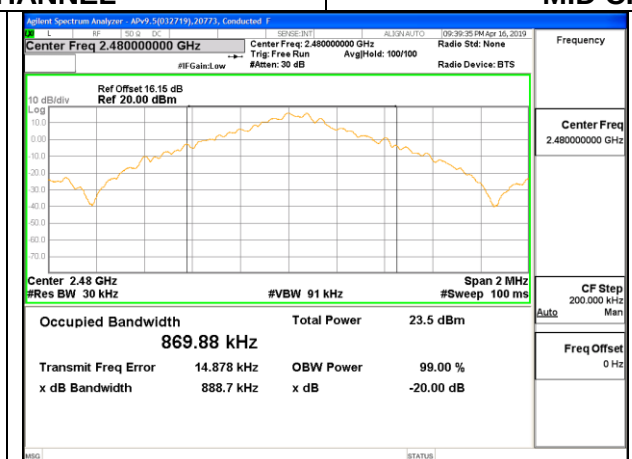


HIGH CHANNEL


8.2.2. HIGH POWER ENHANCED DATA RATE 8PSK MODULATION

Antenna 4


Channel	Frequency (MHz)	20dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	2402	1.379	1.2222
Mid	2441	1.379	1.2229
High	2480	1.380	1.2236

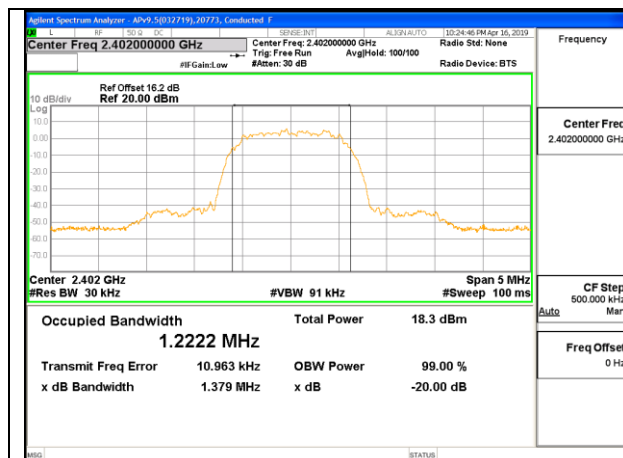

LOW CHANNEL

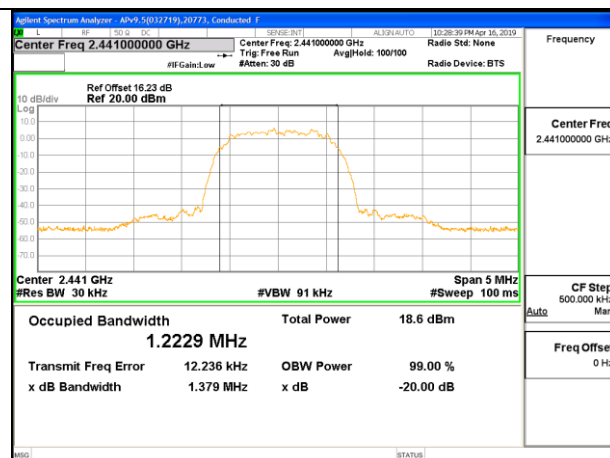


MID CHANNEL

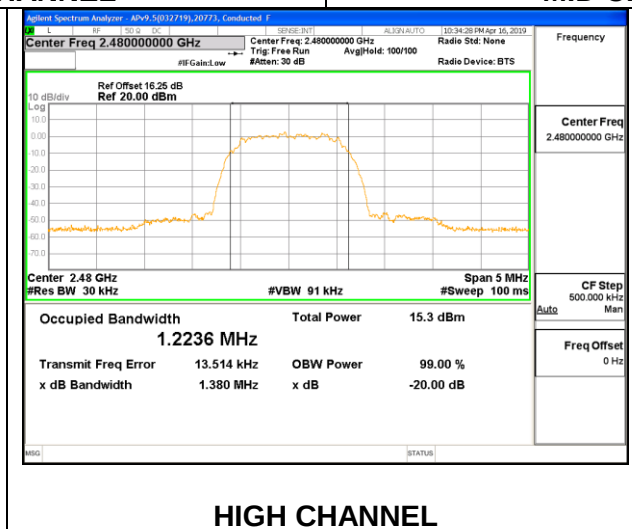


HIGH CHANNEL

Antenna 3


Channel	Frequency (MHz)	20dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	2402	1.380	1.2241
Mid	2441	1.379	1.2242
High	2480	1.379	1.2233

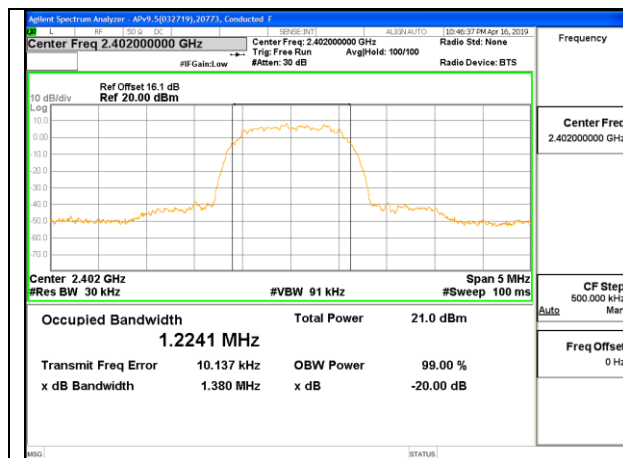

LOW CHANNEL

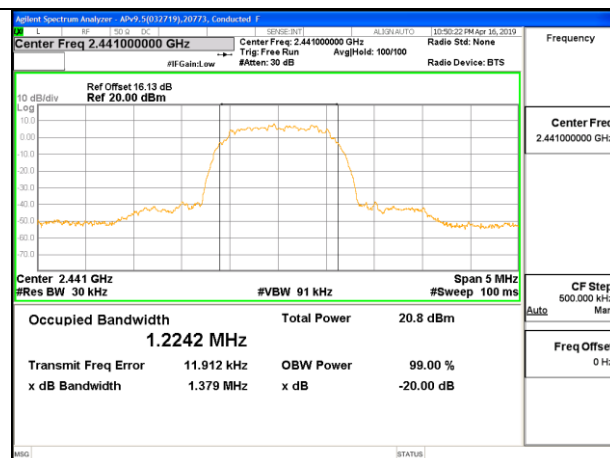

MID CHANNEL

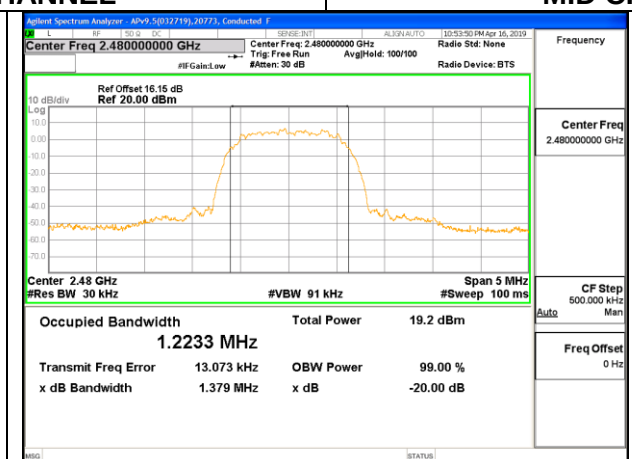


HIGH CHANNEL


8.2.3. LOW POWER BASIC DATA RATE GFSK MODULATION

Antenna 4


Channel	Frequency (MHz)	20dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	2402	0.8884	0.86907
Mid	2441	0.8884	0.86914
High	2480	0.8876	0.86893

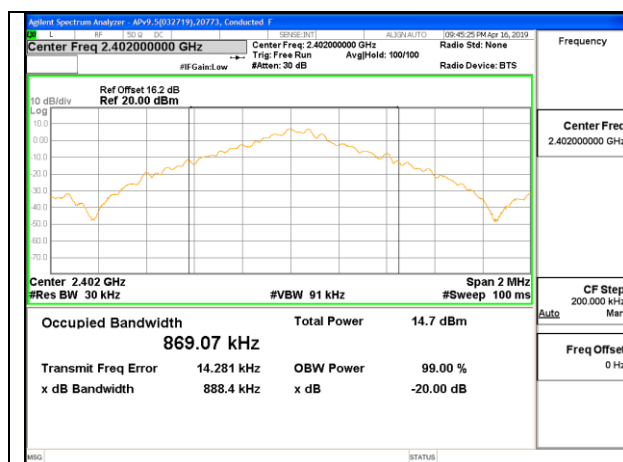

LOW CHANNEL

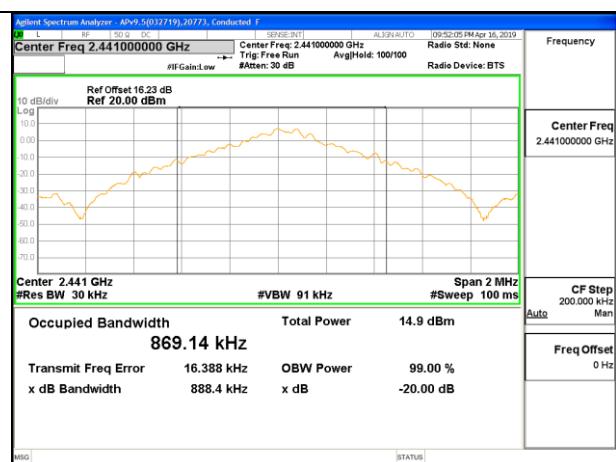




MID CHANNEL

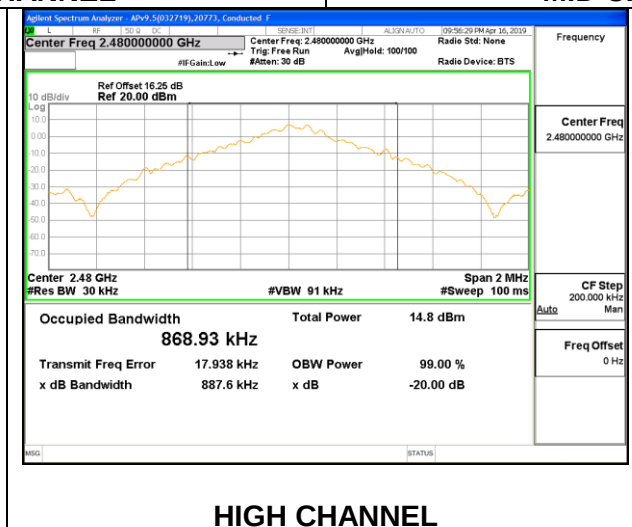

HIGH CHANNEL

Antenna 3


Channel	Frequency (MHz)	20dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	2402	0.9218	0.87202
Mid	2441	0.8893	0.87130
High	2480	0.8896	0.87130

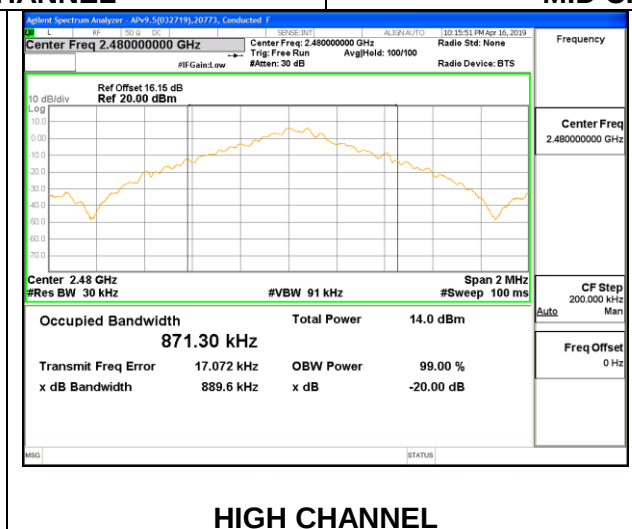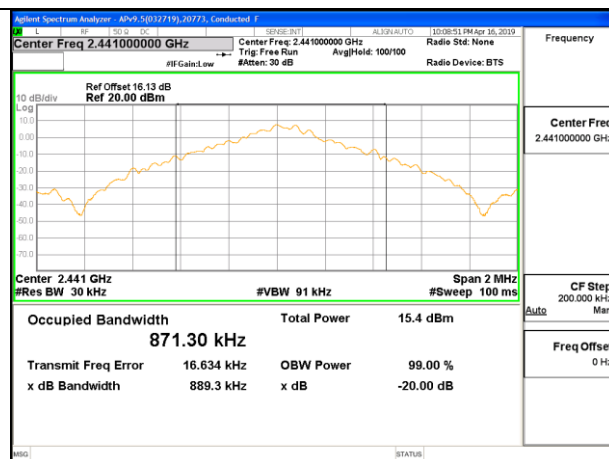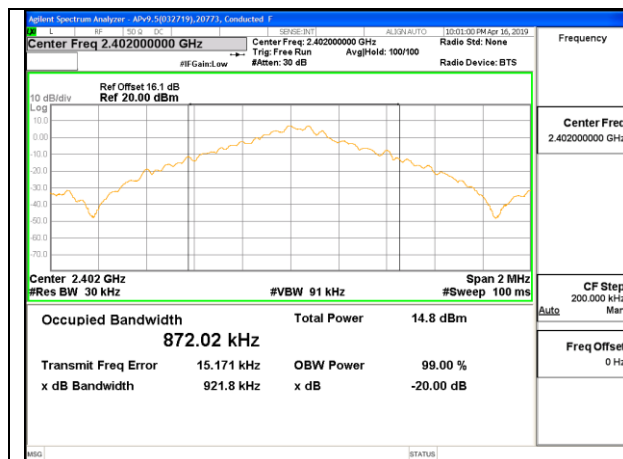


8.2.4. LOW POWER ENHANCED DATA RATE 8PSK MODULATION

Antenna 4


Channel	Frequency (MHz)	20dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	2402	1.380	1.2213
Mid	2441	1.379	1.2212
High	2480	1.379	1.2216

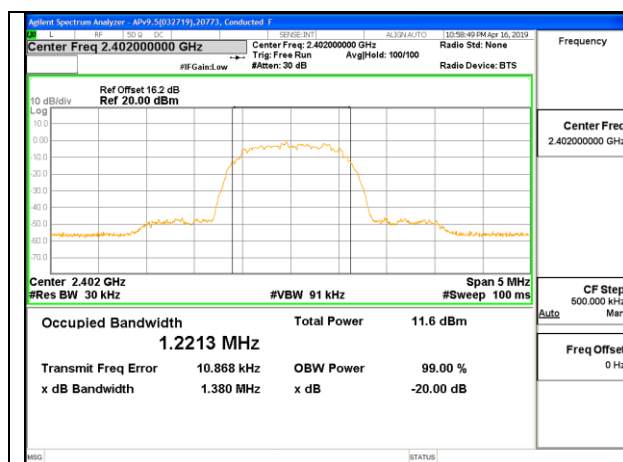

LOW CHANNEL

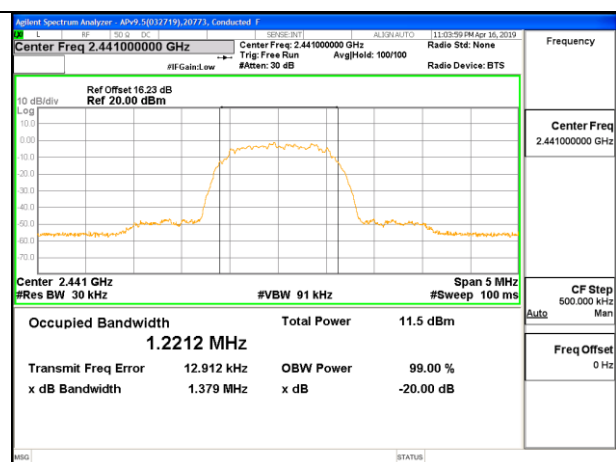



MID CHANNEL

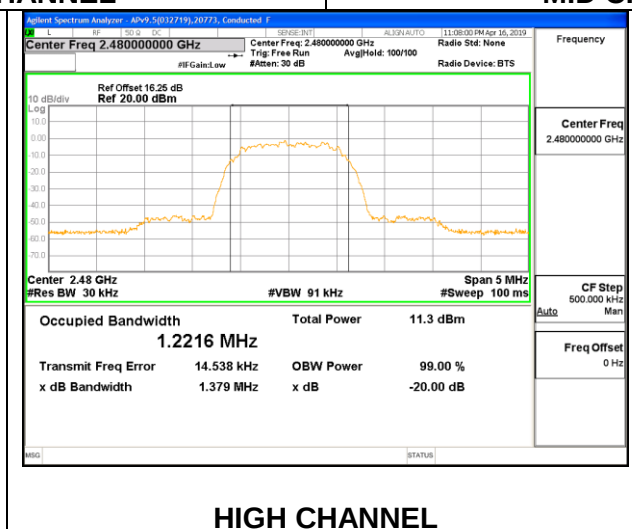

HIGH CHANNEL

Antenna 3

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	2402	1.381	1.2249
Mid	2441	1.382	1.2252
High	2480	1.380	1.2248

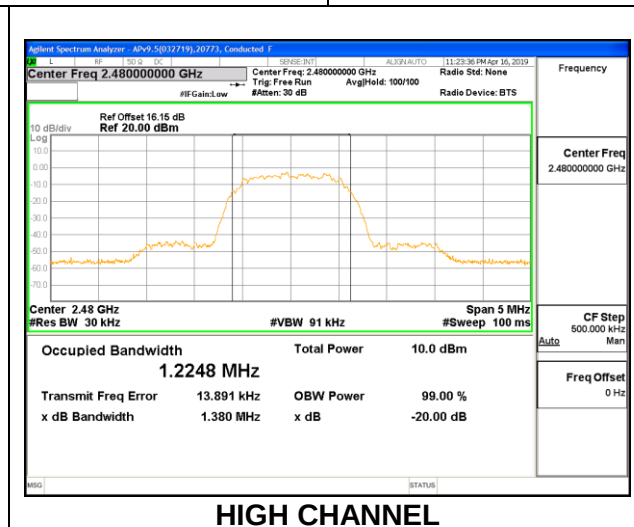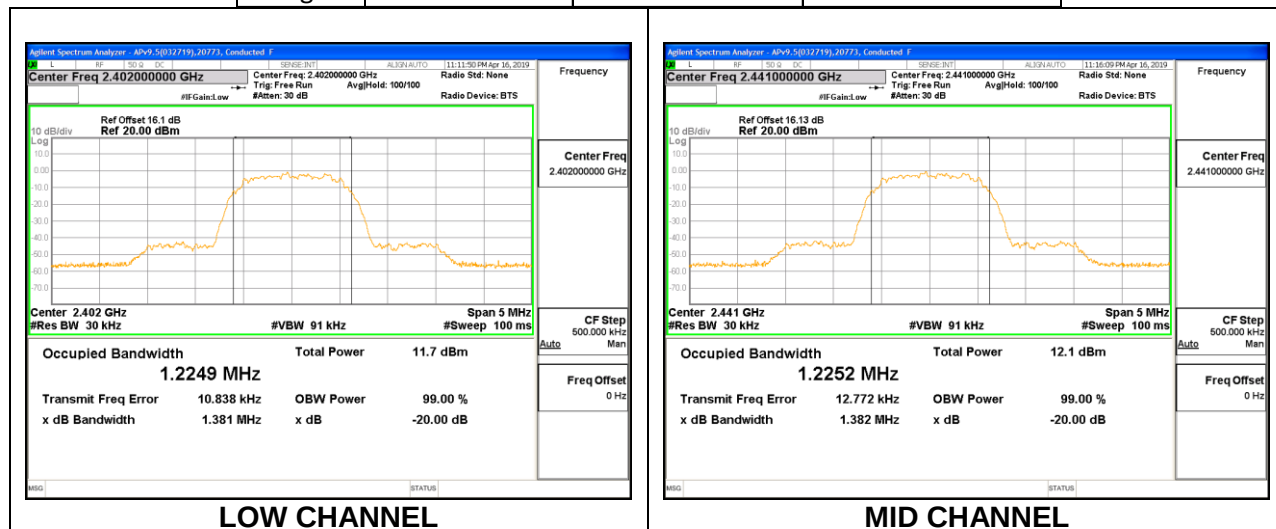





8.3. BEAMFORMING 20 dB AND 99% BANDWIDTH


Note: Test procedure on beamforming mode is same as BT basic and EDR mode

8.3.1. HIGH POWER BASIC DATA RATE GFSK MODULATION

2TX Antenna 4 + Antenna 3 TxBF MODE

Channel	Frequency (MHz)	20dB Bandwidth Antenna 4 (MHz)	99% Bandwidth Antenna 4 (MHz)	20dB Bandwidth Antenna 3 (MHz)	99% Bandwidth Antenna 3 (MHz)
Low	2402	0.8751	0.86846	0.8898	0.87163
Mid	2441	0.8898	0.87163	0.8896	0.87143
High	2480	0.8772	0.86723	0.8888	0.87004

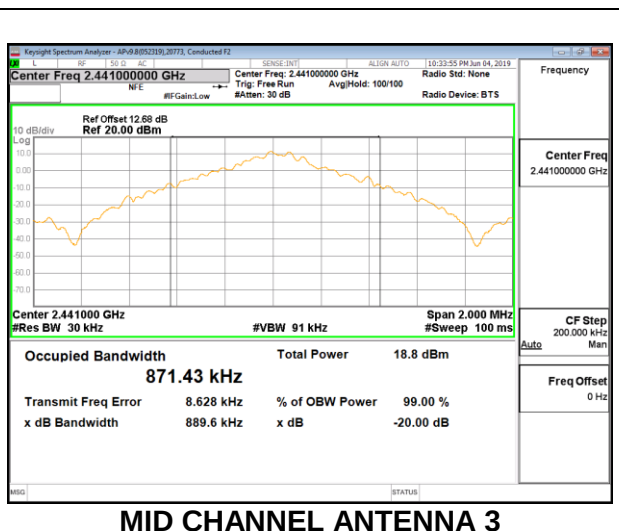
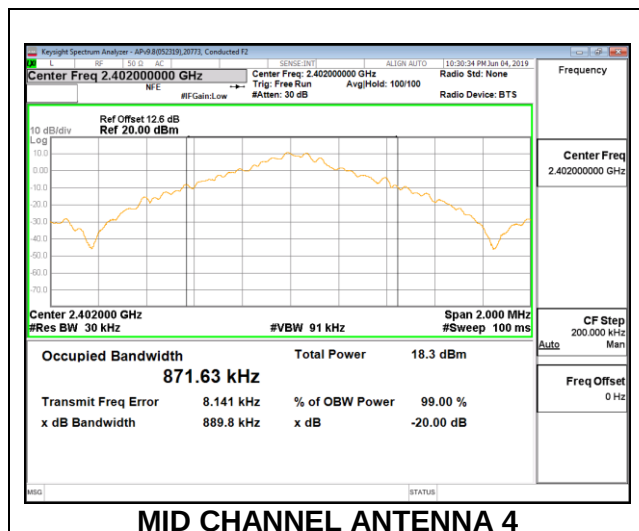
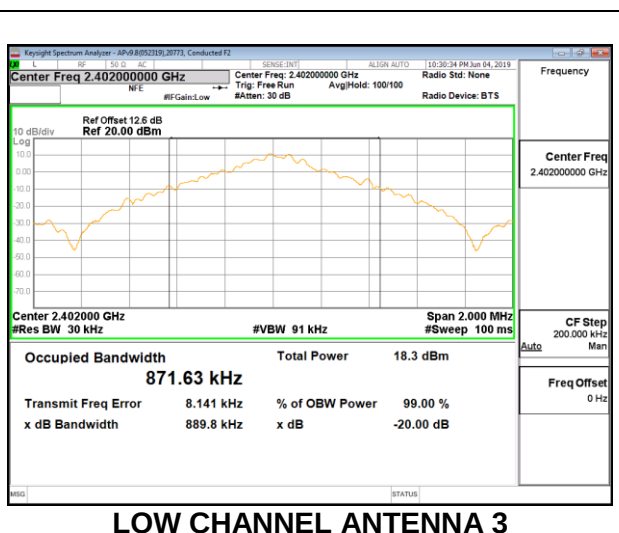
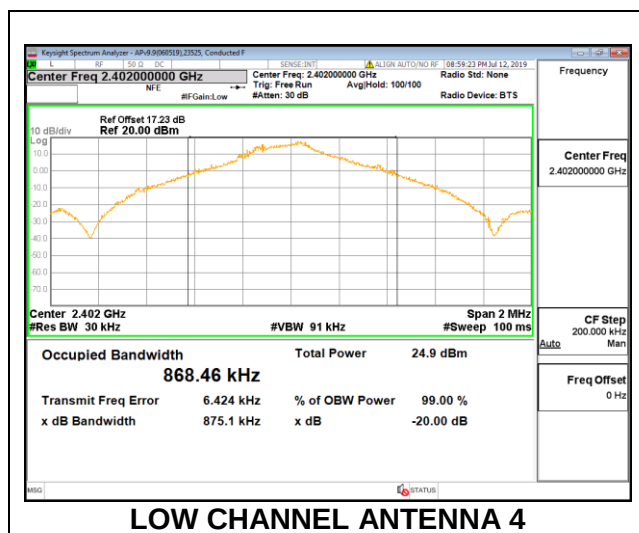


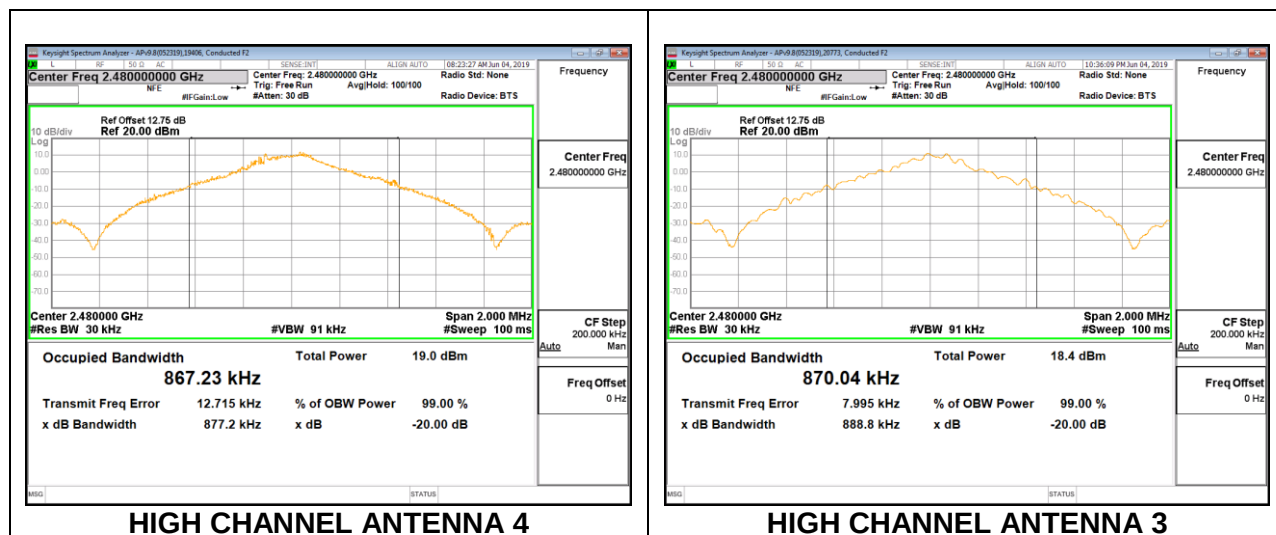


8.3.2. HIGH POWER ENHANCED DATA RATE 8PSK MODULATION

2TX Antenna 4 + Antenna 3 TxBF MODE

Channel	Frequency (MHz)	20dB Bandwidth Antenna 4 (MHz)	99% Bandwidth Antenna 4 (MHz)	20dB Bandwidth Antenna 3 (MHz)	99% Bandwidth Antenna 3 (MHz)
Low	2402	1.382	1.2131	1.382	1.2253
Mid	2441	1.385	1.2173	1.382	1.2255
High	2480	1.359	1.2151	1.382	1.2254

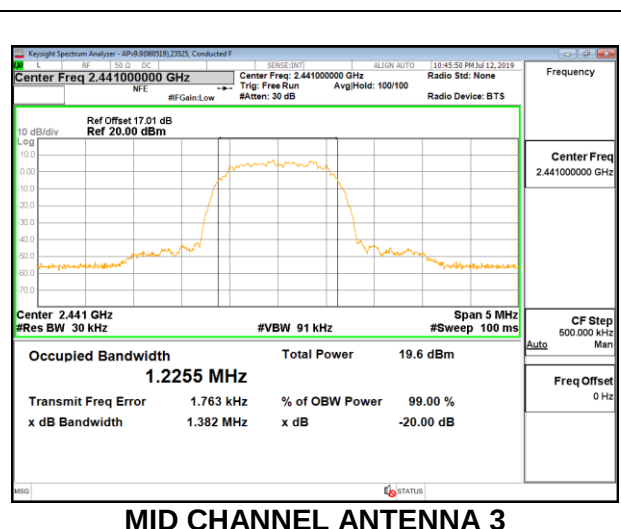
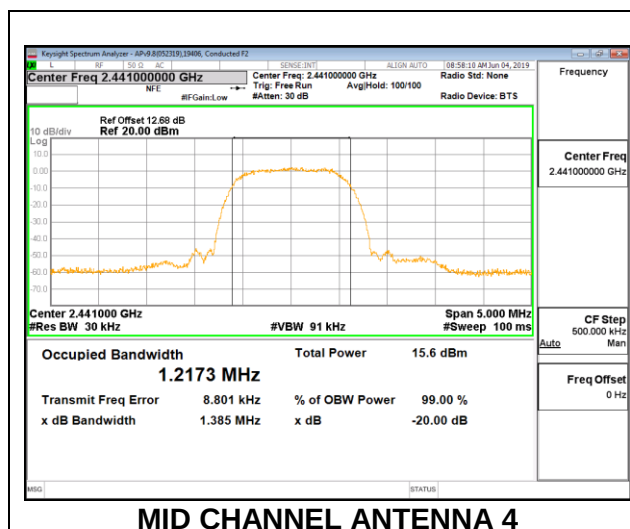
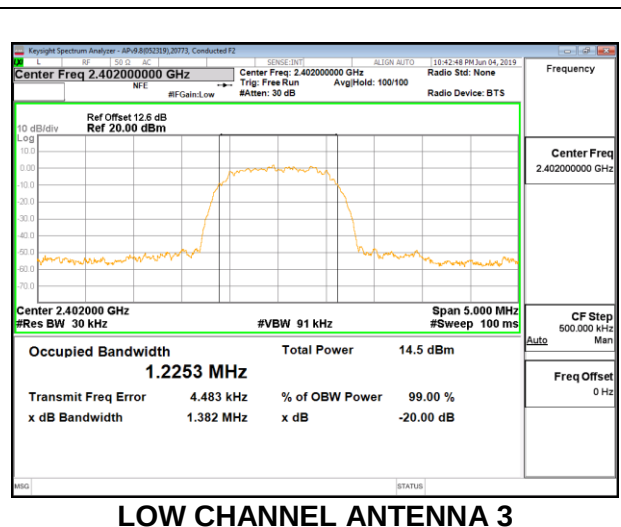
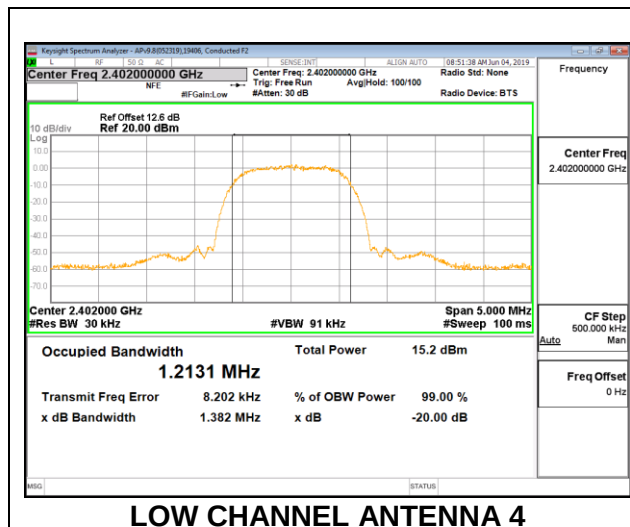


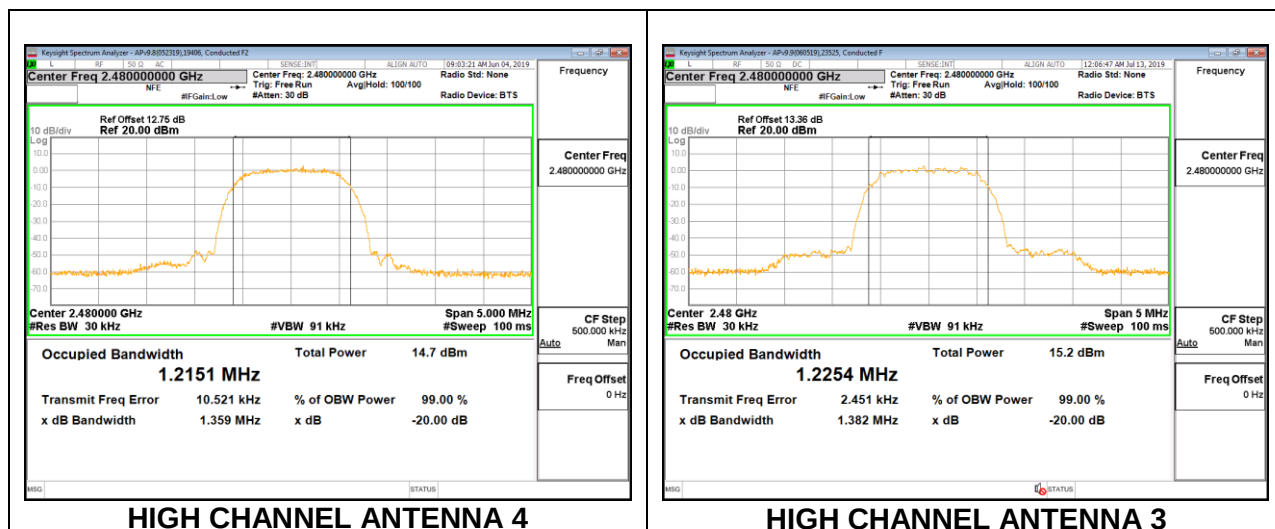


8.3.3. LOW POWER BASIC DATA RATE GFSK MODULATION

2TX Antenna 4 + Antenna 3 TxBF MODE

Channel	Frequency (MHz)	20dB Bandwidth Antenna 4 (MHz)	99% Bandwidth Antenna 4 (MHz)	20dB Bandwidth Antenna 3 (MHz)	99% Bandwidth Antenna 3 (MHz)
Low	2402	0.8979	0.87438	0.9201	0.87135
Mid	2441	0.8807	0.87054	0.8901	0.87154
High	2480	0.8771	0.86689	0.8899	0.86982

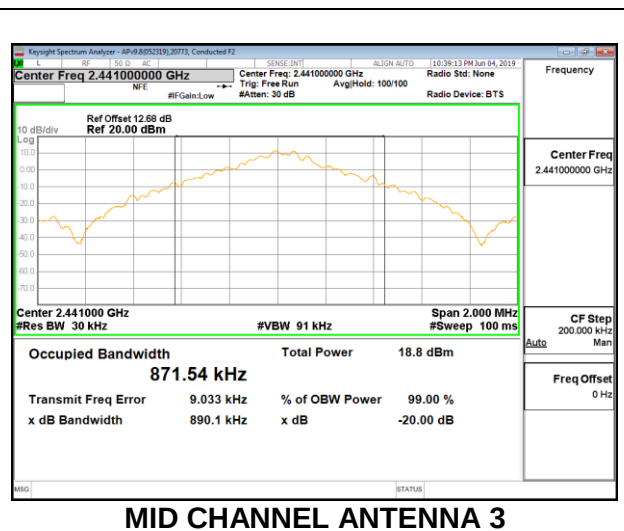
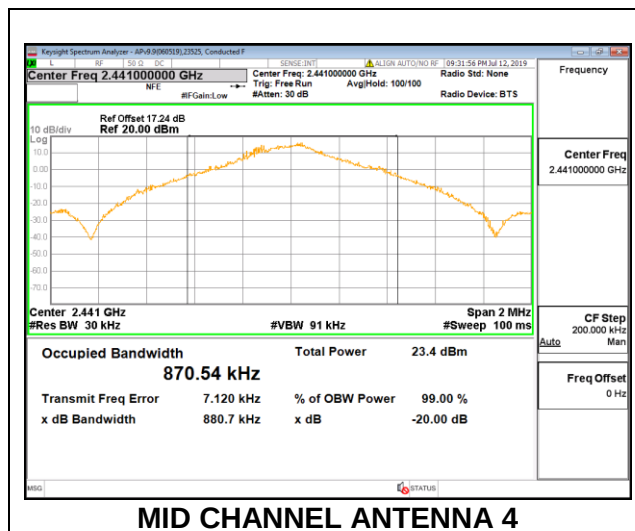
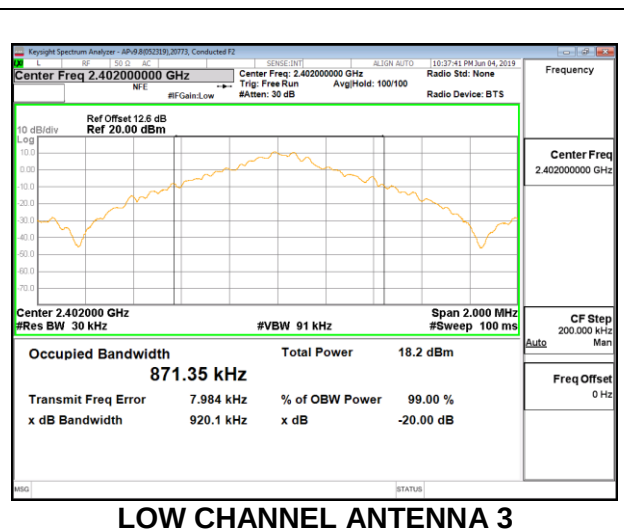
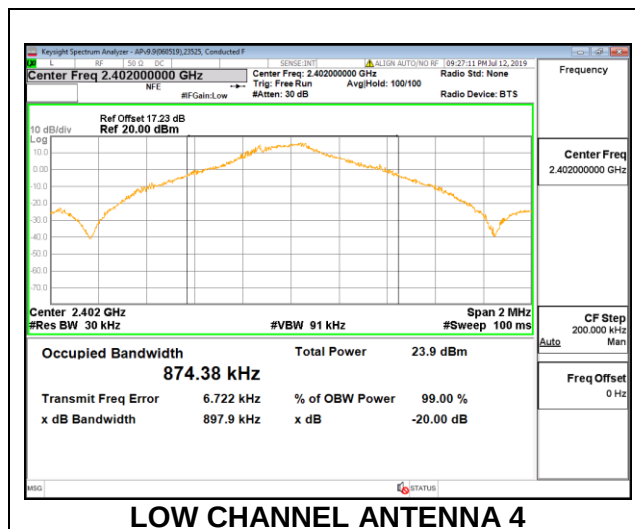


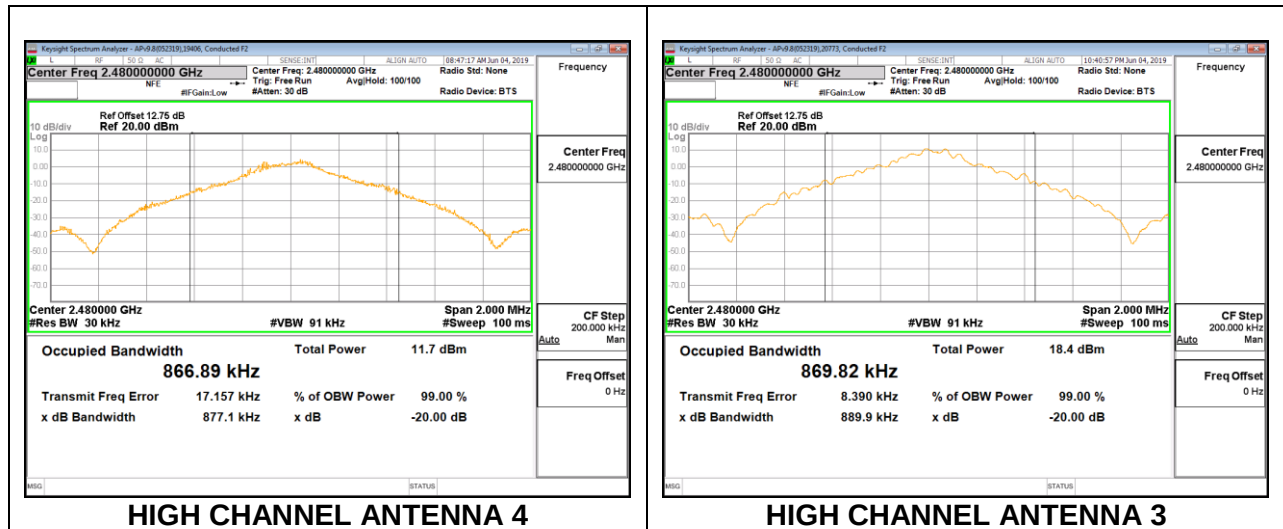


8.3.4. LOW POWER ENHANCED DATA RATE 8PSK MODULATION

2TX Antenna 4 + Antenna 3 TxBF MODE

Channel	Frequency (MHz)	20dB Bandwidth Antenna 4 (MHz)	99% Bandwidth Antenna 4 (MHz)	20dB Bandwidth Antenna 3 (MHz)	99% Bandwidth Antenna 3 (MHz)
Low	2402	1.378	1.2183	1.381	1.2250
Mid	2441	1.370	1.2179	1.382	1.2263
High	2480	1.365	1.2111	1.382	1.2260

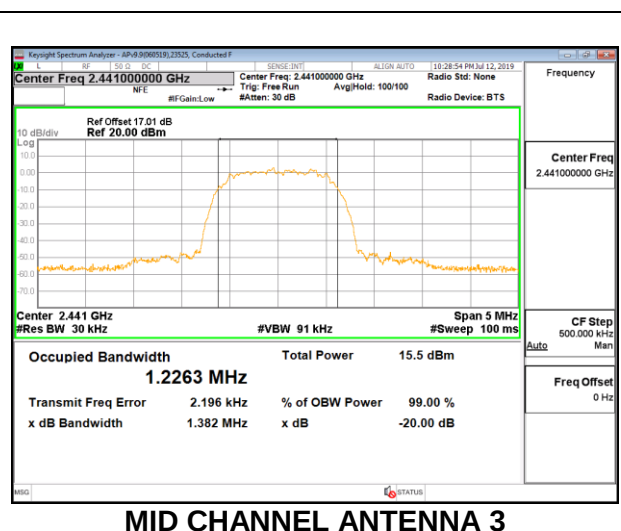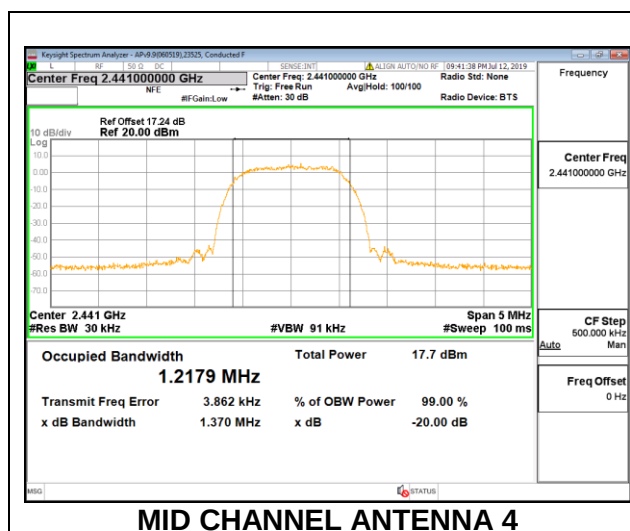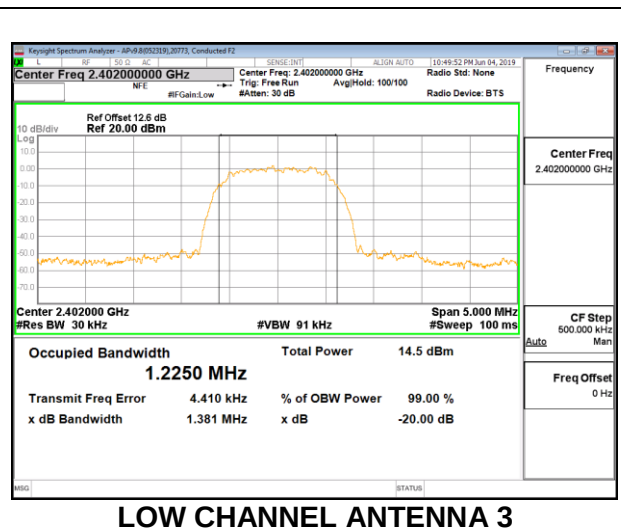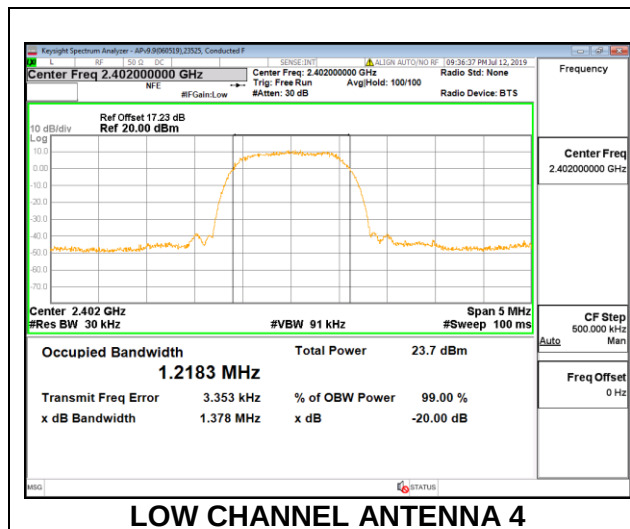

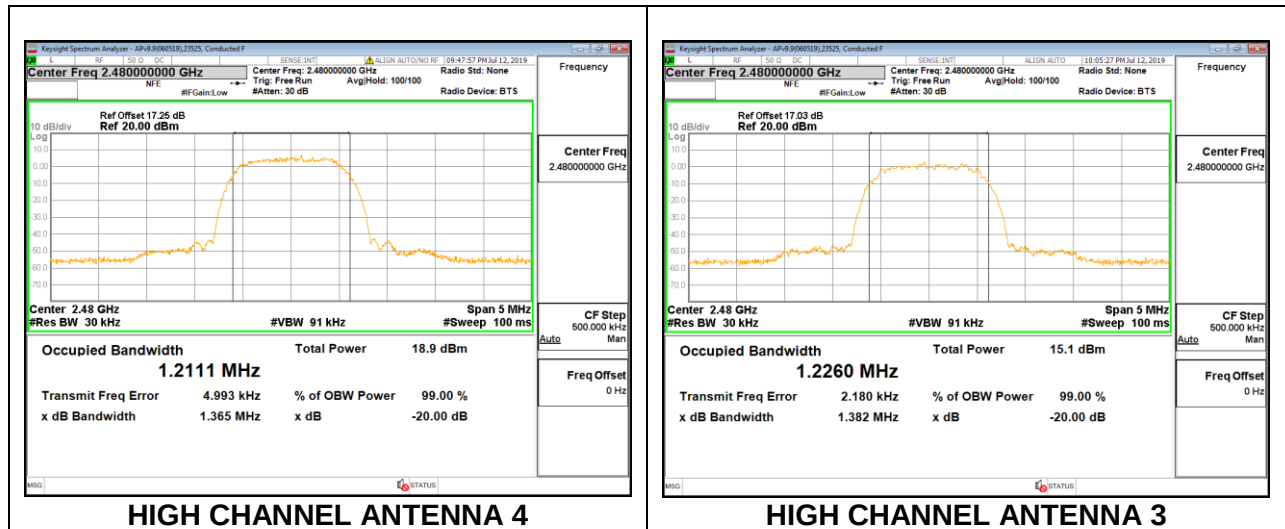

8.4. HOPPING FREQUENCY SEPARATION

LIMITS

FCC §15.247 (a) (1)

RSS-247 (5.1) (b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to 300 kHz and the VBW is set to 3xRBW. The sweep time is coupled.

RESULTS


8.4.1. HIGH POWER BASIC DATA RATE GFSK MODULATION

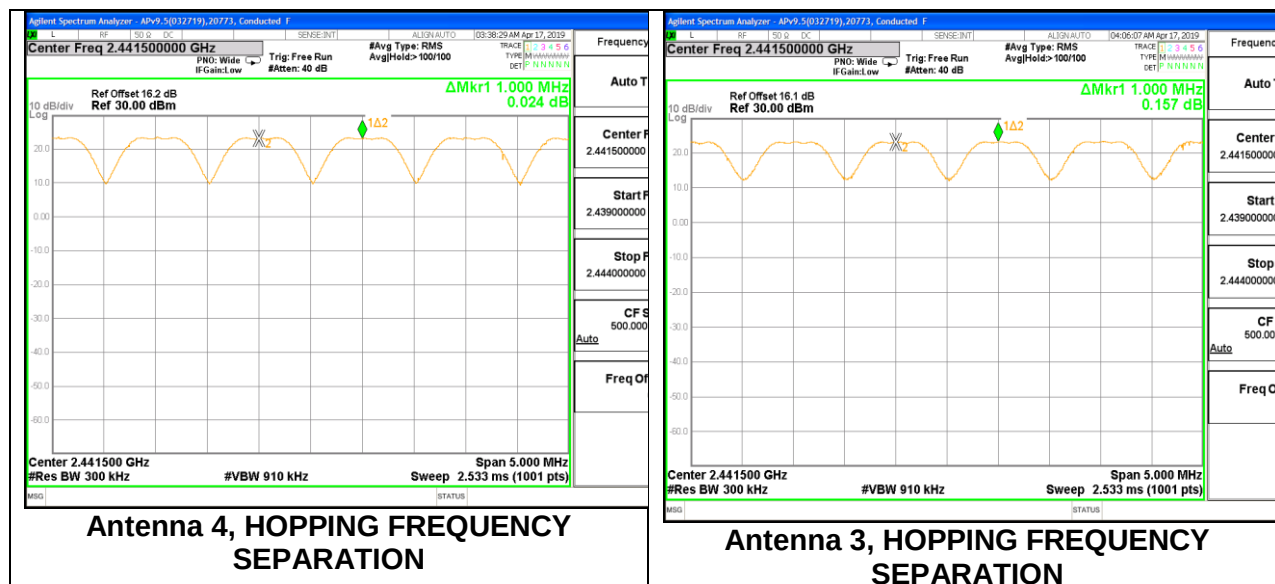


8.4.2. HIGH POWER ENHANCED DATA RATE 8PSK MODULATION

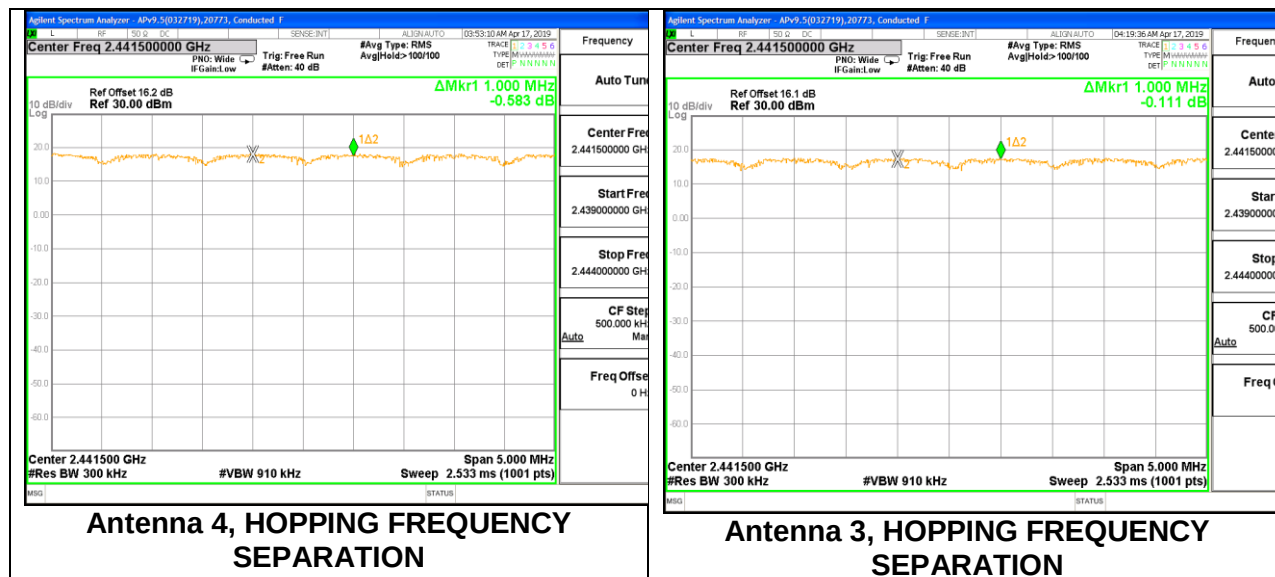

8.4.3. LOW POWER BASIC DATA RATE GFSK MODULATION

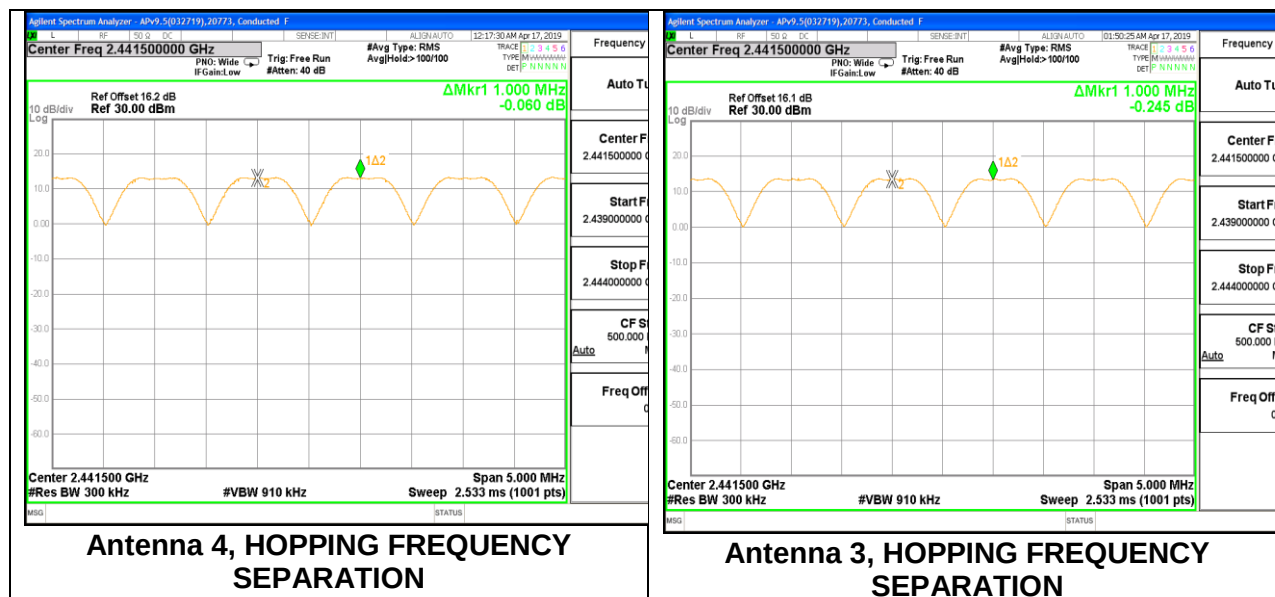

8.4.4. LOW POWER ENHANCED DATA RATE 8PSK MODULATION

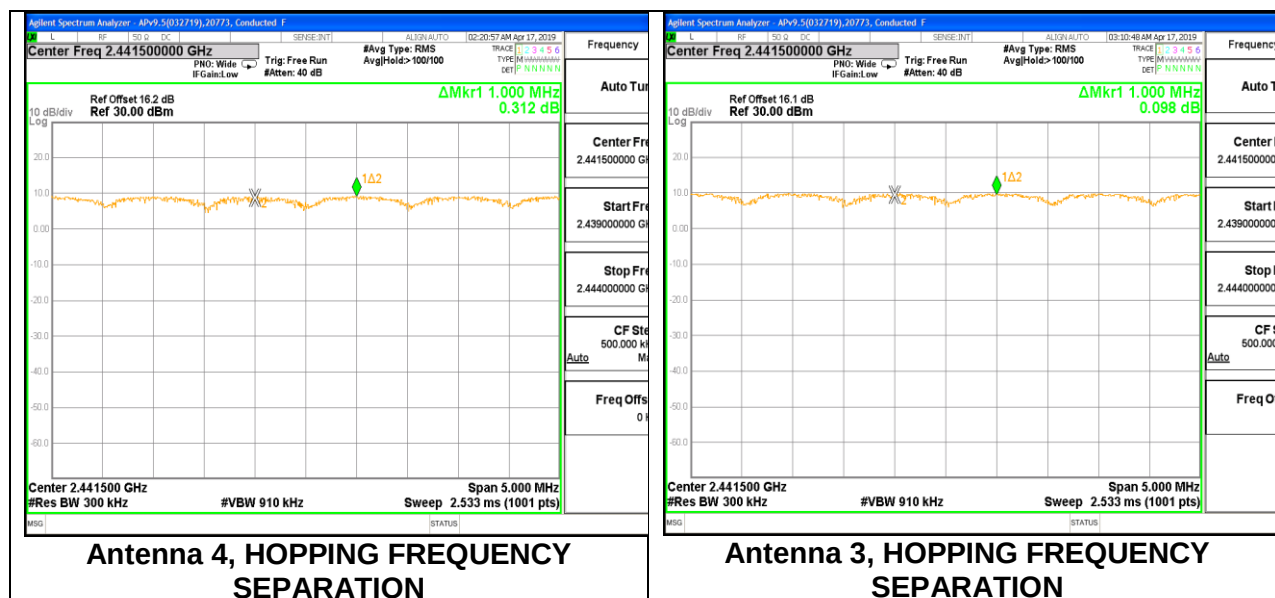

8.5. BEAMFORMING HOPPING FREQUENCY SEPARATION

LIMITS

FCC §15.247 (a) (1)

RSS-247 (5.1) (b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to 300 kHz and the VBW is set to VBW $\geq$ RBW. The sweep time is coupled.

Note: Test procedure on beamforming mode is same as BT basic and EDR mode

RESULTS

8.5.1. HIGH POWER BASIC DATA RATE GFSK MODULATION

HOPPING FREQUENCY SEPARATION

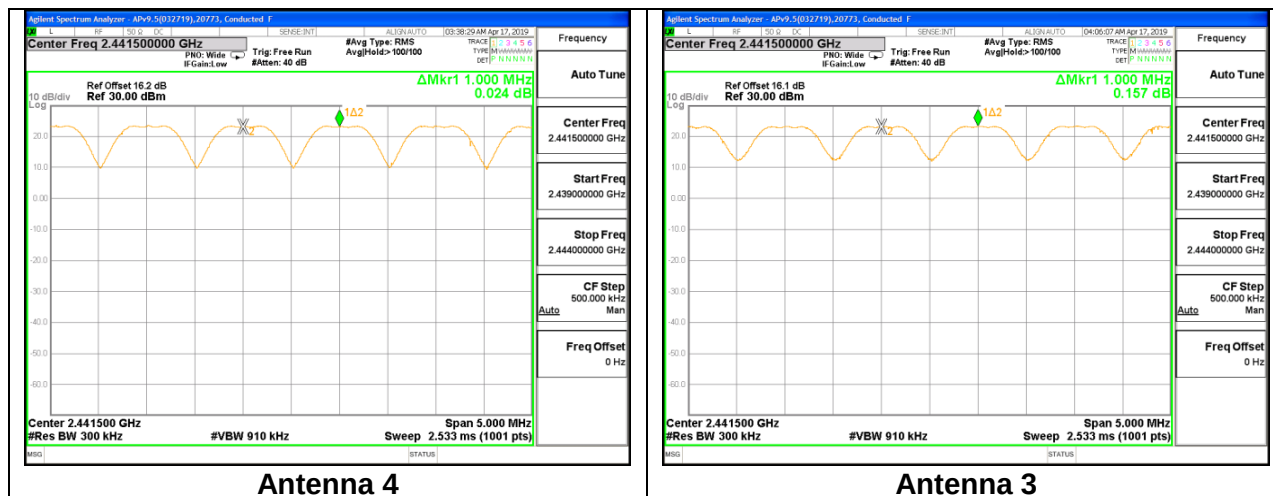


8.5.2. HIGH POWER ENHANCED DATA RATE 8PSK MODULATION

HOPPING FREQUENCY SEPARATION




8.5.3. LOW POWER BASIC DATA RATE GFSK MODULATION

HOPPING FREQUENCY SEPARATION

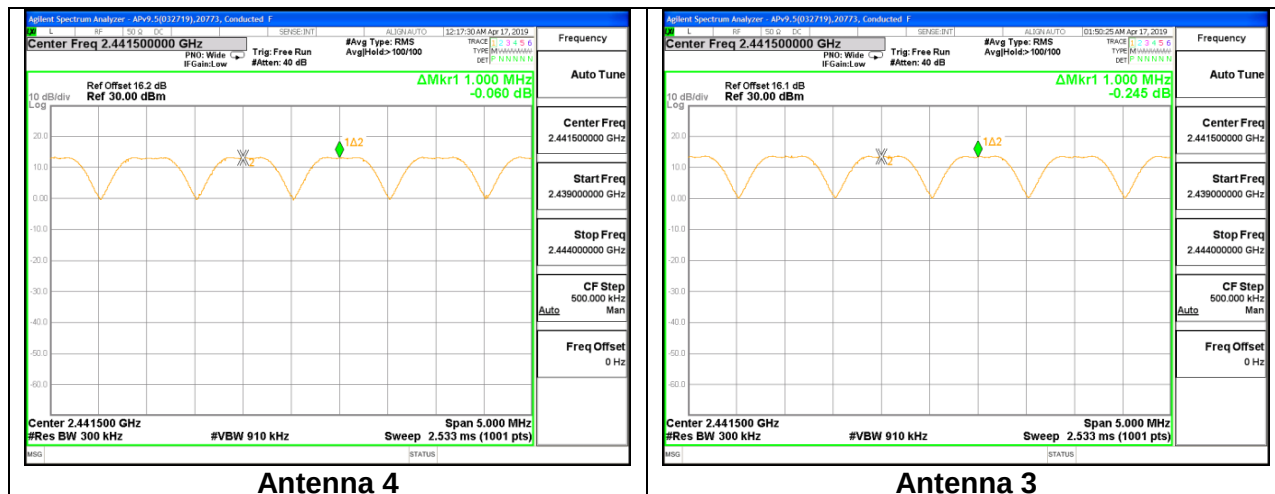

8.5.4. LOW POWER ENHANCED DATA RATE 8PSK MODULATION

HOPPING FREQUENCY SEPARATION

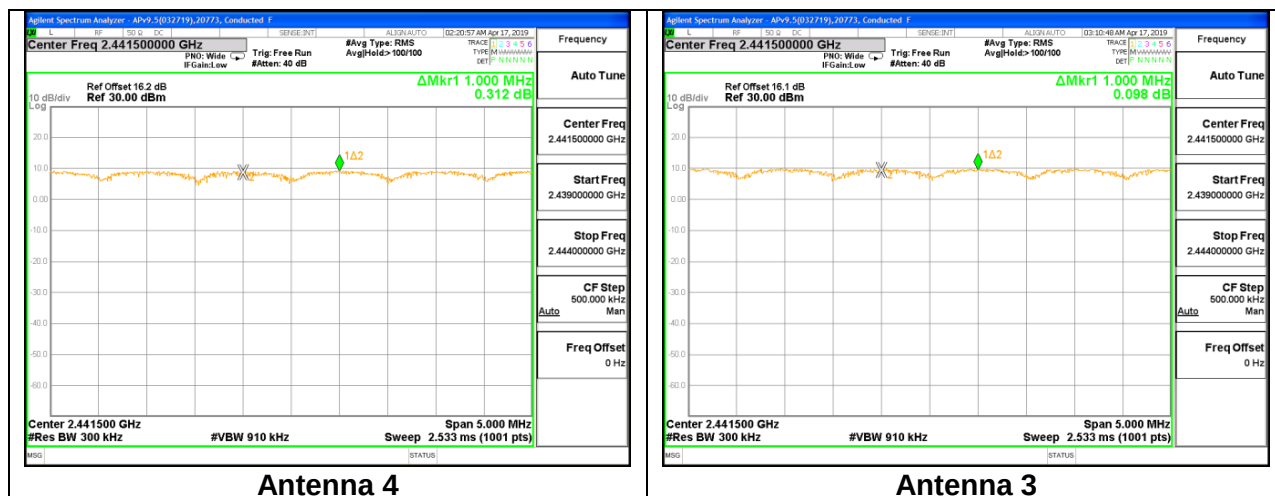

8.6. NUMBER OF HOPPING CHANNELS

LIMITS

FCC §15.247 (a) (1) (iii)

RSS-247 (5.1) (d)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.

RESULTS


Normal Mode: 79 Channels Observed

8.6.1. HIGH POWER BASIC DATA RATE GFSK MODULATION

Antenna 4

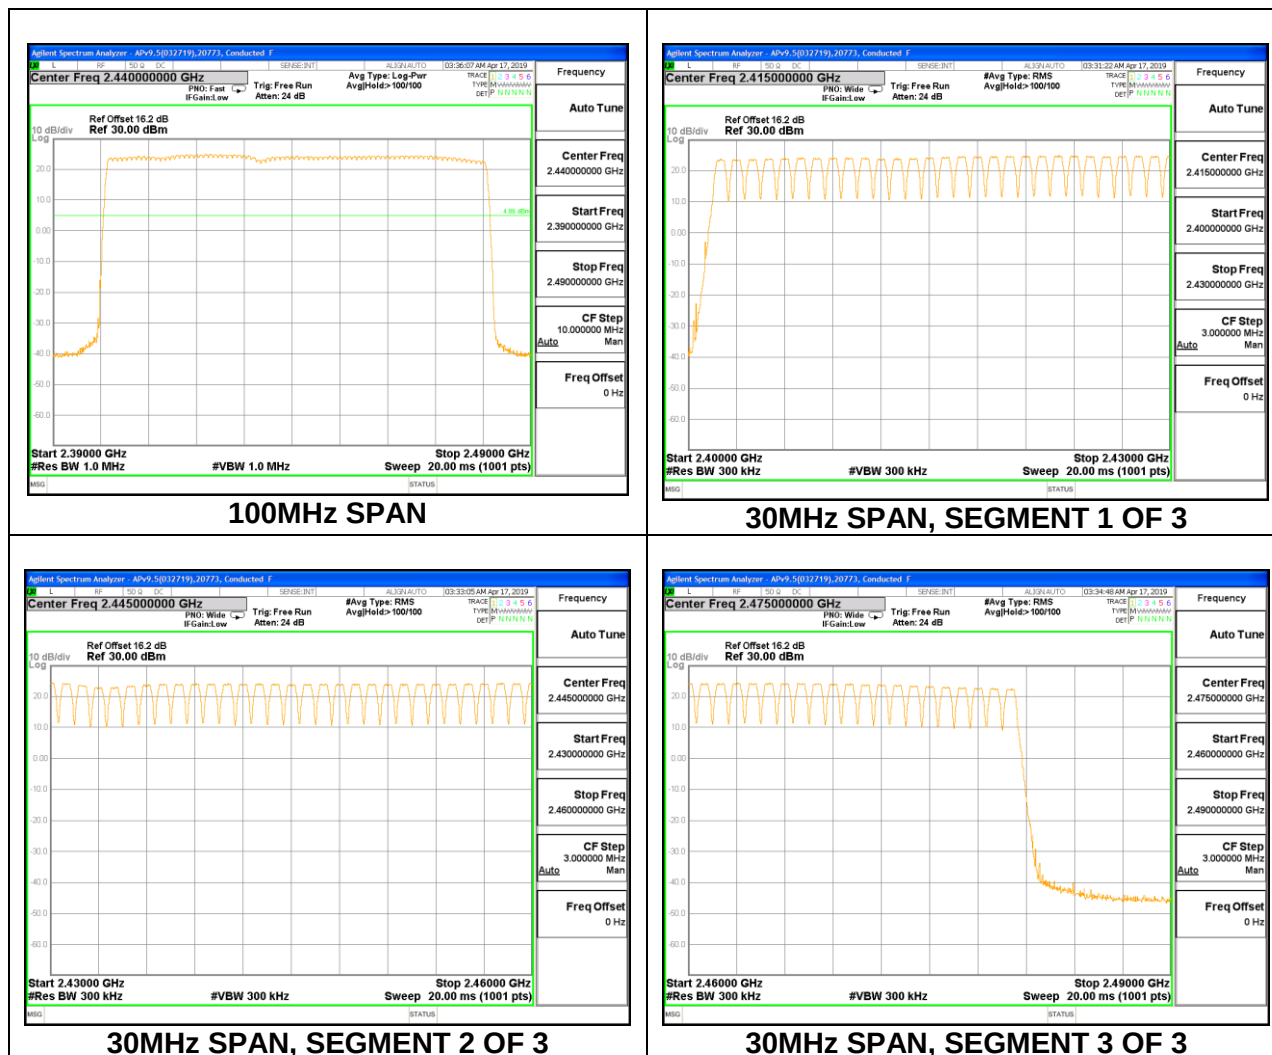


Antenna 3

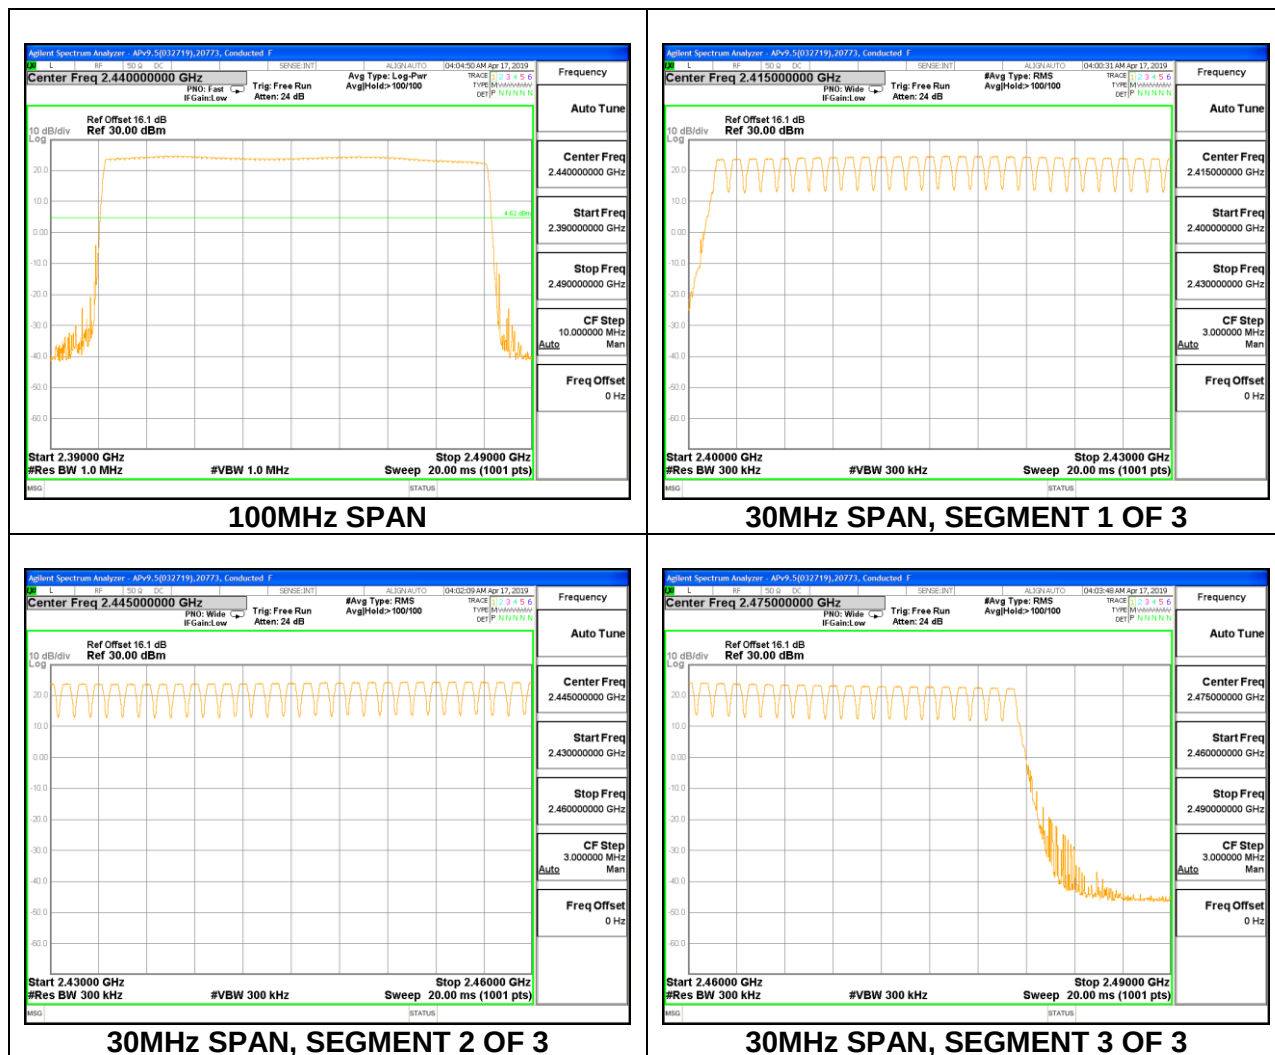


8.6.2. HIGH POWER ENHANCED DATA RATE 8PSK MODULATION

Antenna 4

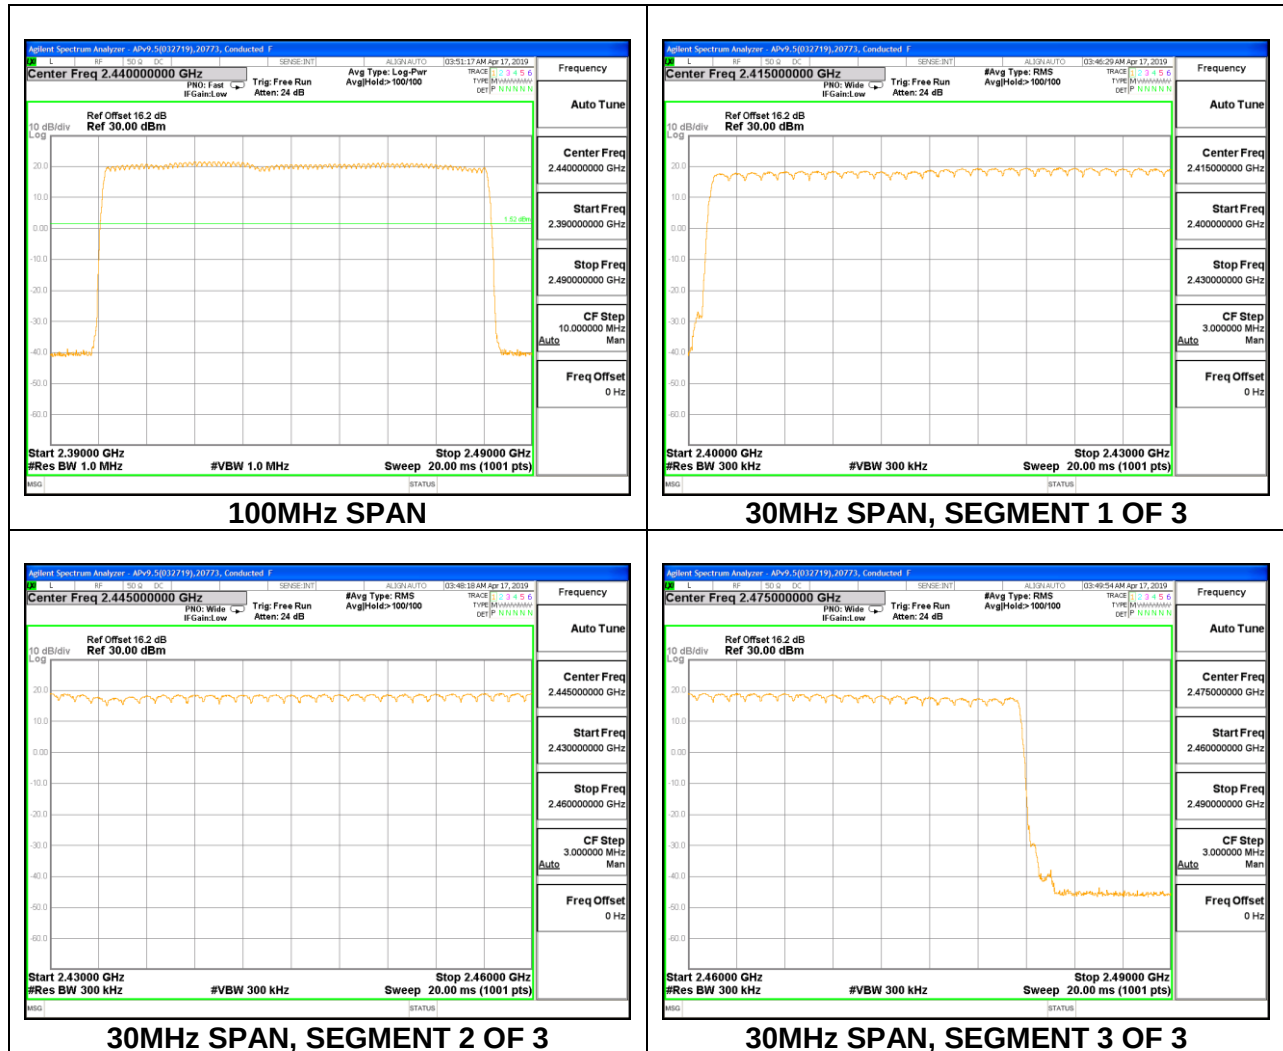


Antenna 3

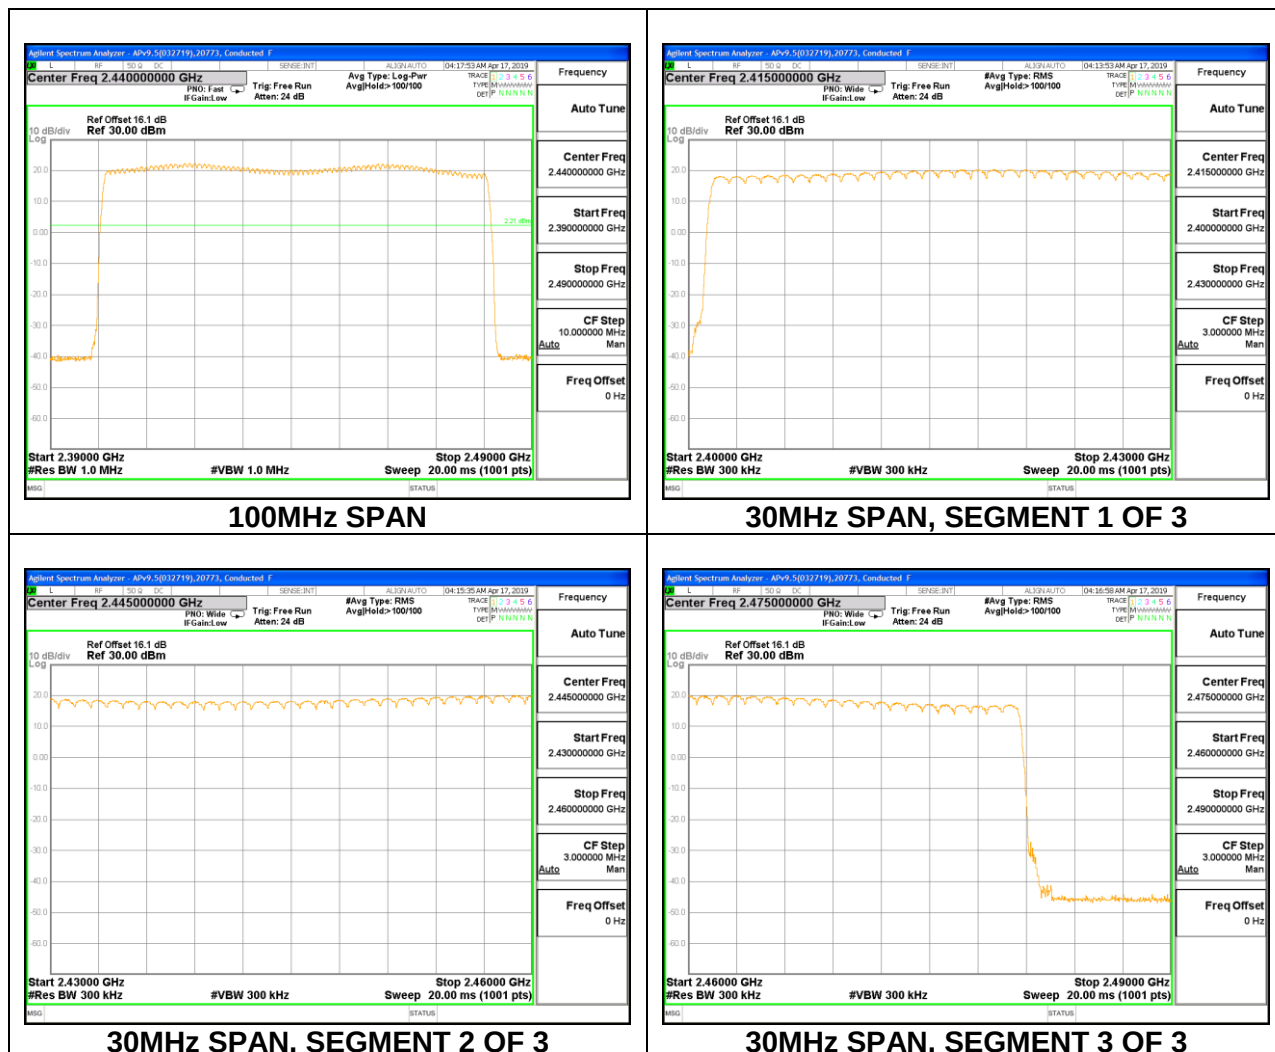


8.6.3. LOW POWER BASIC DATA RATE GFSK MODULATION

Antenna 4

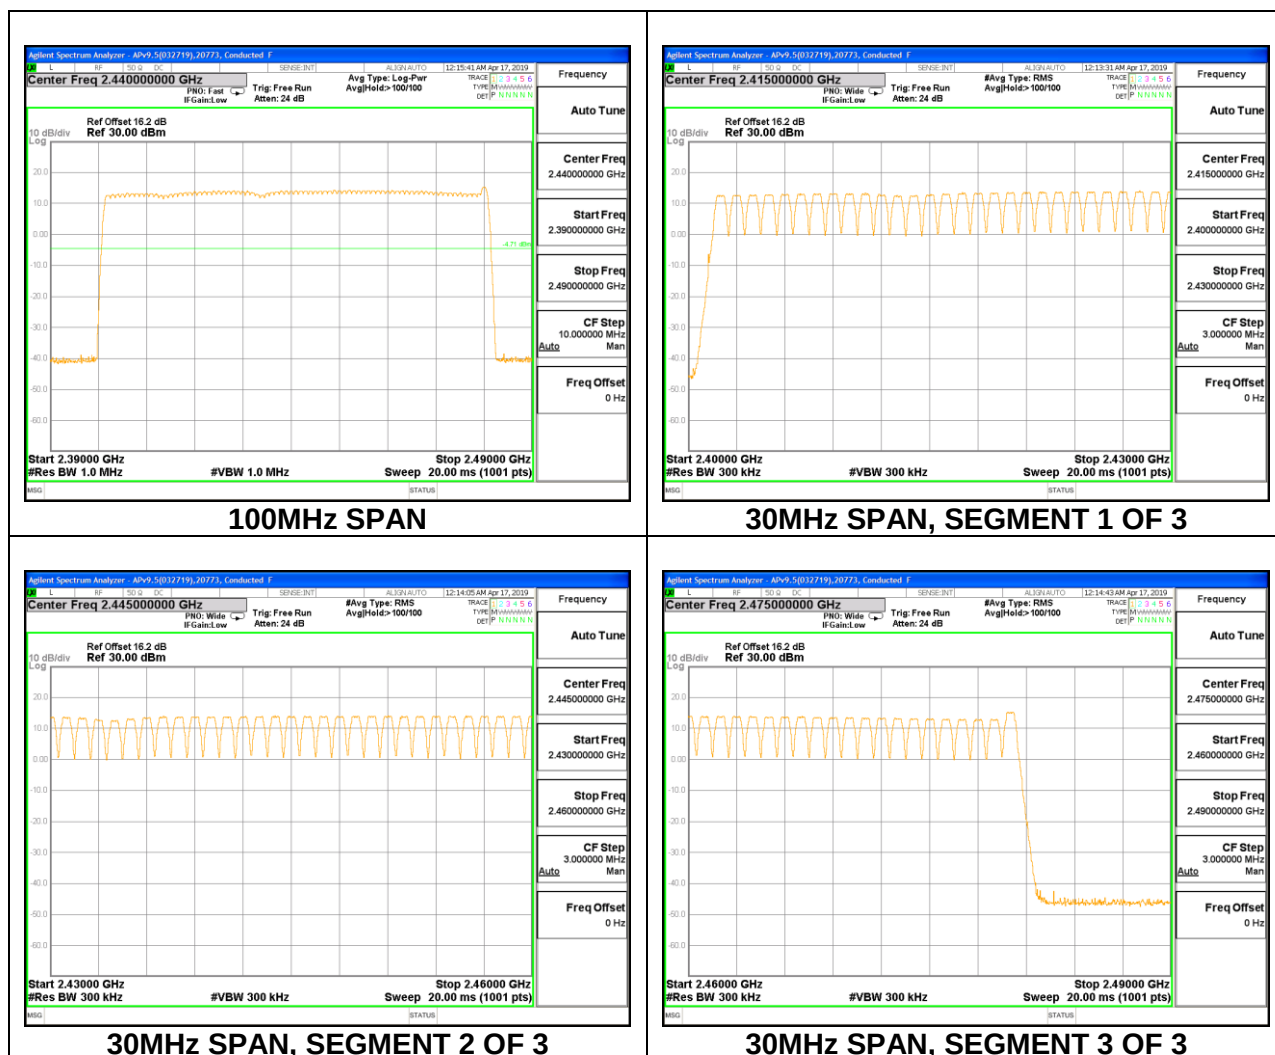

Antenna 3

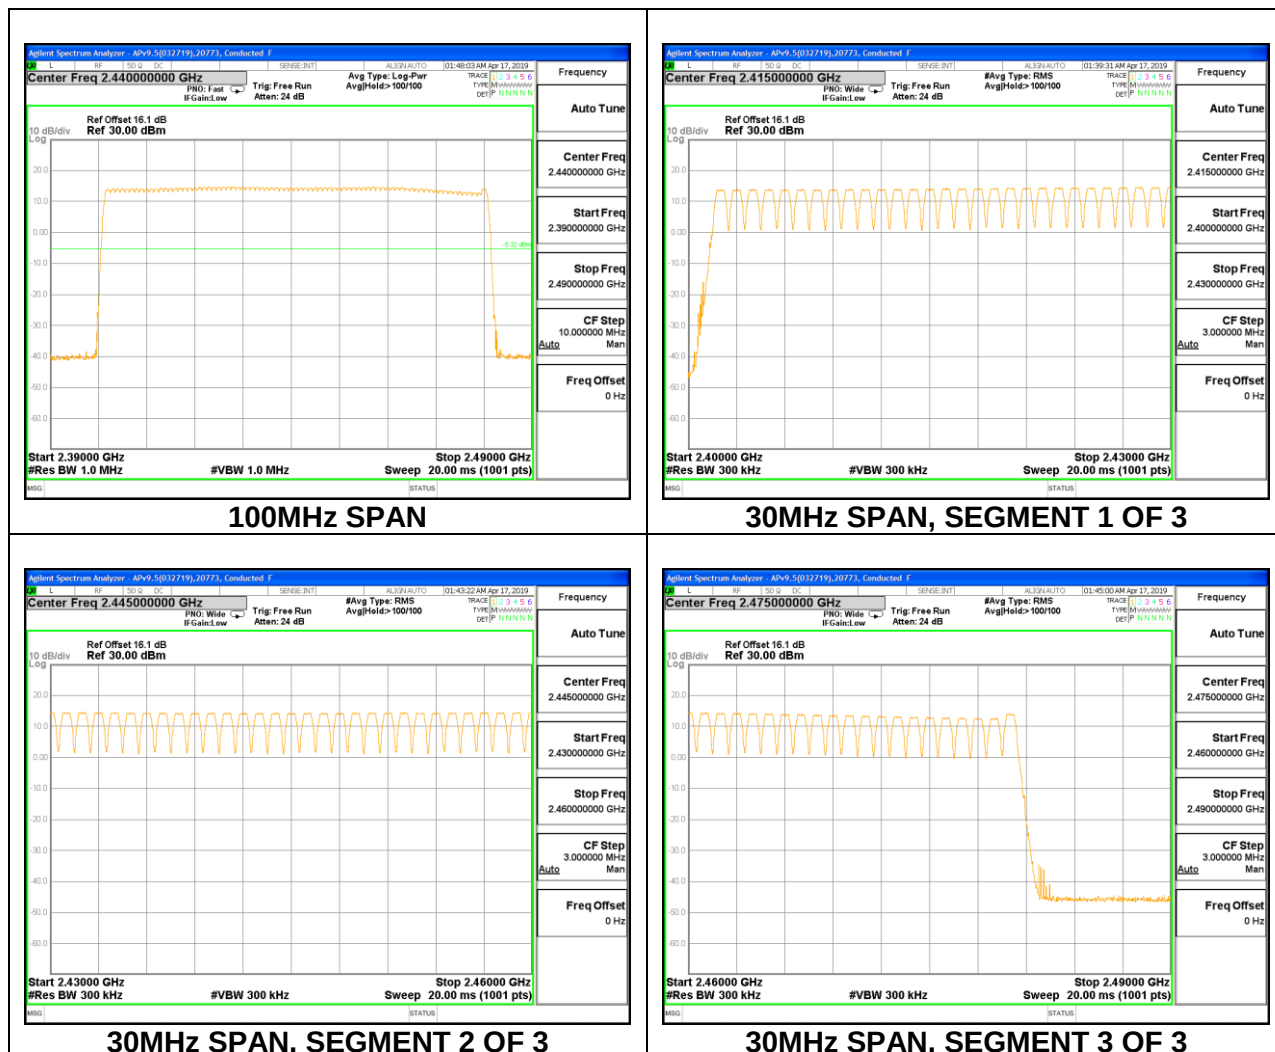

8.6.4. LOW POWER ENHANCED DATA RATE 8PSK MODULATION

Antenna 4

