



SPOT CHECK TEST REPORT

Report Number: 1594128-E1V2

Applicant : APPLE, INC
1 APPLE PARK WAY
CUPERTINO, CA 95014, U.S.A.

Model : A3634, A3635

Brand : APPLE

FCC ID : BCG-E9147A, BCG-E9148A

EUT Description : SMARTPHONE

Test Standard(s) : FCC 47 CFR Part 2, Part 22, Part 24, Part 25, Part 27, Part 90,
and Part 96

Date Of Issue:
2026-01-06

Prepared by:
UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538, U.S.A.
TEL: (510) 319-4000
FAX: (510) 661-0888



Revision History

Rev.	Issue Date	Revisions	Revised By
V1	2025-12-17	Initial Review	--
V2	2026-01-06	Updated Sections 5.4, 5.5, & 5.6	Binod Sitaula

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS 4

2. TEST METHODOLOGY 5

3. FACILITIES AND ACCREDITATION 5

4. DECISION RULES AND MEASUREMENT UNCERTAINTY 6

 4.1. METROLOGICAL TRACEABILITY 6

 4.1. DECISION RULES 6

 4.2. MEASUREMENT UNCERTAINTY 6

 4.3. SAMPLE CALCULATION.....6

5. INTRODUCTION OF TEST DATA REUSE 7

 5.1. DESCRIPTION OF EUT.....7

 5.2. INTRODUCTION.....7

 5.3. MODEL DIFFERENCES 7

 5.4. SPOT CHECK VERIFICATION RESULTS SUMMARY FOR A3634 9

 5.5. SPOT CHECK VERIFICATION RESULTS SUMMARY FOR A3635 12

 5.6. REFERENCE DETAIL.....15

 5.7. SOFTWARE AND FIRMWARE.....16


 5.8. SPOT CHECK WORST-CASE CONFIGURATION AND MODE 16

 5.9. DESCRIPTION OF TEST SETUP.....16

6. TEST AND MEASUREMENT EQUIPMENT 18

Appendix A – Reference Test Report 19

1. ATTESTATION OF TEST RESULTS

Applicant Name and Address	APPLE, INC 1 APPLE PARK WAY CUPERTINO, CA 95014, U.S.A.	
Model	A3634, A3635	
Brand	APPLE	
FCC ID	BCG-E9147A, BCG-E9148A	
EUT Description	SMARTPHONE	
Serial Number	MODEL (A3634): C07HM3000K500016LV (Conducted), GJF656CX93 (Radiated) MODEL (A3635): C07HM40001900016M1 (Conducted), KW3THWPN6J (Radiated)	
Sample Receipt Date	2025-07-29	
Date Tested	2025-09-11 to 2025-12-09	
Applicable Standards	FCC 47 CFR Part 2, Part 22, Part 24, Part 25, Part 27, Part 90, and Part 96	
Test Results	COMPLIES	
UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report. The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document.		
Approved & Released By:	Reviewed By:	Prepared By:
		
Mengistu Mekuria Staff Engineer UL Verification Services Inc.	Binod Sitaula Laboratory Engineer Associate UL Verification Services Inc.	Tewodros Woldemichael Laboratory Engineer UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with the following:

- ANSI C63.26:2015
- ANSI/TIA-603-E (2016)
- FCC 47 CFR Part 2, Part 22, Part 24, Part 25, Part 27, Part 90, and Part 96
- [FCC KDB 971168 D01](#): Power Meas License Digital Systems
- [FCC KDB 971168 D02](#): Misc Rev Approv License Devices
- [FCC KDB 484596 D01 v03](#): Referencing Test Data

3. FACILITIES AND ACCREDITATION

UL Verification Services Inc. is accredited by A2LA, certification #0751.05, for all testing performed within the scope of this report. Testing was performed at the locations noted below.

	Address	ISED CABID	ISED Company Number	FCC Registration
☒	Building 1: 47173 Benicia Street, Fremont, CA 94538, USA	US0104	2324A	550739
☐	Building 2: 47266 Benicia Street, Fremont, CA 94538, USA			
☒	Building 3: 843 Auburn Court, Fremont, CA 94538, USA			
☐	Building 4: 47658 Kato Rd, Fremont, CA 94538, USA			
☒	Building 5: 47670 Kato Rd, Fremont, CA 94538, USA			

4. DECISION RULES AND MEASUREMENT UNCERTAINTY

4.1. METROLOGICAL TRACEABILITY

All test and measuring equipment utilized to perform the tests documented in this report are calibrated on a regular basis, with a maximum time between calibrations of one year or the manufacturers' recommendation, whichever is less, and where applicable is traceable to recognized national standards.

4.1. DECISION RULES

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4:2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	U _{Lab}
Conducted Antenna Port Emission Measurement	1.940 dB
Power Spectral Density	2.466 dB
Time Domain Measurements Using SA	3.39 %
RF Power Measurement Direct Method Using Power Meter	0.450 dB Ave. 1.300 dB Peak
Radio Frequency (Spectrum Analyzer)	141.16 Hz
Occupied Bandwidth	1.22%
Worst Case Conducted Disturbance, 9KHz to 0.15 MHz	3.78 dB
Worst Case Conducted Disturbance, 0.15 to 30 MHz	3.40 dB
Worst Case Radiated Disturbance, 9KHz to 30 MHz	2.87 dB
Worst Case Radiated Disturbance, 30 to 1000 MHz	6.01 dB
Worst Case Radiated Disturbance, 1000 to 18000 MHz	4.73 dB
Worst Case Radiated Disturbance, 18000 to 26000 MHz	4.51 dB
Worst Case Radiated Disturbance, 26000 to 40000 MHz	5.29 dB

Uncertainty figures are valid to a confidence level of 95%.

4.3. SAMPLE CALCULATION

RADIATED EMISSIONS

Where relevant, the following sample calculation is provided:

Field Strength (dBuV/m) = Measured Voltage (dBuV) + Antenna Factor (dB/m) + Cable Loss (dB) – Preamp Gain (dB)
36.5 dBuV + 18.7 dB/m + 0.6 dB – 26.9 dB = 28.9 dBuV/m

5. INTRODUCTION OF TEST DATA REUSE

5.1. DESCRIPTION OF EUT

"The Apple iPhone is a smartphone with GSM, GPRS, EGPRS, WCDMA, LTE, 5G NR1, IEEE 802.11a/b/g/n/ac/ax, Bluetooth (BT), Global Positioning System (GPS), Near-Field Communication (NFC) and Mobile Satellite Service (MSS) technologies. The rechargeable battery is not user accessible. This device is not user-serviceable and requires special tools to disassemble."

Testing was performed on the parent model and is used to support the application for the parent and variants identified in this report based on the test plan submitted and approved via KDB inquiry by the FCC.

5.2. INTRODUCTION

This application for certification is leveraging the data reuse procedures from KDB 484596 D01 based on reference FCC ID: BCG-E9145A to cover variant models FCC ID: BCG-E9147A and FCC ID BCG-E9148A. The major difference between the parent/reference model and the variant model is the depopulation of some LTE and 5G NR Bands. All other circuitry and features are identical. The data reuse test plan was approved via manufacturer KDB inquiry.

5.3. MODEL DIFFERENCES

The manufacturer hereby declares the following for models A3575, A3634, and A3635.

These models are highly similar, with the only difference being the supported cellular bands.

Model	FCC ID	Feature Difference	Sim Support	Reference Model
A3575	BCG-E9145A	No FR2 No UL MIMO	eSIM	Reference
A3634	BCG-E9147A	No FR2 -Removed B14/29/71 No UL MIMO	eSIM+pSIM	A3575
A3635	BCG-E9148A	No FR2 -Removed B14/29/53/71 No UL MIMO No MSS	eSIM+pSIM	

Note:

They have the same PCB layout, design, common components, antennas, antenna locations and housing cases.

More specifically, their cellular modem, Wi-Fi, BT, and NFC transmitters are identical, and removal of cellular bands is done by software and depopulation of band-specific components associated with the removed bands.

Spot check verification has been done on models A3634 and A3635 in accordance with the test plan approved via KDB inquiry. Spot checks were performed for conducted output power in all bands and radiated spurious emissions on selected bands representing bands below 1GHz, in the range 1 - 2GHz, in the range 2 - 3GHz and above 3GHz. For data referencing the criteria from KDB 484596 D01 v03 equation (4).

For EMC compliance test data (e.g., spurious emissions limits), the deviation between the variant and the parent model, for both field and power quantities, is expressed as:

$$d_{dB} = |V_{dB} - R_{dB}| \quad (1),$$

where V_{dB} is the variant spot-check level in dB, and R_{dB} is the corresponding reference measurement level in dB for the parent model.

The spot-check will be deemed acceptable when:

$$d_{dB} \leq d_{dBmax} \quad (2),$$

where d_{dBmax} is the maximum deviation d_{dB} allowed for the EMC data for the spot-check to be considered acceptable. The definition of d_{dBmax} is based on “how far” the reference data R_{dB} is from the compliance threshold C_{dB} (also expressed in dB), for the test under consideration. More specifically, if M_{dB} is the margin in dB from the compliance limit, expressed as

$$M_{dB} = |C_{dB} - R_{dB}| \quad (3),$$

then d_{dBmax} is defined as a function of M_{dB} , which increases linearly from 3 dB to 6 dB (Fig. 2), according to:

$$d_{dBmax}(M_{dB}) = \begin{cases} (3 + M_{dB}/20) \text{ dB} & , \text{ for } 0 \leq M_{dB} \leq 60 \text{ dB} \\ 6 \text{ dB} & , \text{ for } M_{dB} > 60 \text{ dB} \end{cases} \quad (4).$$

The meaning of eq. (4) can be expressed as follows:

- For $M_{dB} = 0$ dB, then $d_{dB} \leq 3$ dB: $M_{dB} = 0$ dB $\Rightarrow R_{dB} = C_{dB}$, which represents the limiting case when R_{dB} is exactly at the compliance threshold C_{dB} ; according to (4) the variant level V_{dB} cannot be more than 3 dB away from the reference level R_{dB} , but in this case, it can only be lower than R_{dB} . Any value greater than R_{dB} would be out of compliance since $R_{dB} = C_{dB}$.
- As the compliance margin M_{dB} becomes larger than 0, a more “forgiving” d_{dB} (larger than 3 dB but always less than 6dB) is allowed. Additionally, the variant level V_{dB} can exceed the reference level R_{dB} , but it will still be limited by the compliance level C_{dB} .
- For $M_{dB} > 60$ dB, then $d_{dB} = 6$ dB: Here, the reference data is 60 dB below the compliance threshold C_{dB} . This is typically the case when the measurements are approaching the noise floor level. For this reason, the difference d_{dB} is allowed to be up to 6 dB. However, no further increase beyond $d_{dB} = 6$ dB, is allowed, even for larger margins. In other words, even if $M_{dB} = 80$ dB, the maximum allowed difference d_{dB} will still be 6 dB.

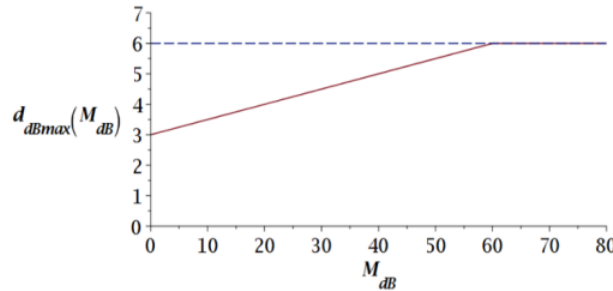


Figure 2. The piecewise linear function for d_{dBmax} , which represents the maximum allowed d_{dB} , as given by eq. (4). The spot-check is acceptable when the deviation d_{dB} is below the d_{dBmax} curve.

5.4. SPOT CHECK VERIFICATION RESULTS SUMMARY FOR A3634

A3634 ANTENNA PORT SPOT CHECK RESULTS							
Technology	Worst Mode	Test Item	Measured	Original Model: A3575	Sub Model: A3634	Delta (dB)	Remarks
			Frequency (MHz)	FCC ID :BCG-E9145A (dBm)	FCC ID: BCG-E9147A (dBm)		
GSM	GPRS 850	Cond Power	824.5	33.50	33.50	0.00	
	GPRS 1900	Cond Power	1850.2	32.00	32.00	0.00	
WCDMA	REL99 B5	Cond Power	836.5	25.70	25.70	0.00	
	REL99 B2	Cond Power	1880.0	25.70	25.70	0.00	
	REL99 B4	Cond Power	1732.5	25.70	25.70	0.00	

A363 ANTENNA PORT SPOT CHECK RESULTS							
Technology	Worst Mode	Test Item	Measured	Original Model: A3575	Sub Model: A3634	Delta (dB)	Remarks
			Frequency (MHz)	FCC ID: BCG-E9145A (dBm)	FCC ID: BCG-E9147A (dBm)		
LTE 5CA	QPSK @ 10MHz+10MHz BW	Cond Power	834.1/844	25.7	25.7	0.00	
LTE 7CA	QPSK @ 20MHz+20MHz BW	Cond Power	2525.1/2544.9	25.7	25.7	0.00	
LTE 41CA	QPSK @ 20MHz+20MHz BW	Cond Power	2583.1/2602.9	28.7	28.7	0.00	
LTE 48CA	QPSK @ 20MHz+20MHz BW	Cond Power	3615.1/3634.9	24.7	24.7	0.00	

A3634 ANTENNA PORT SPOT CHECK RESULTS							
Technology	Worst Mode	Test Item	Measured	Original Model: A3575	Sub Model: A3634	Delta (dB)	Remarks
			Frequency (MHz)	FCC ID: BCG-E9145A (dBm)	FCC ID: BCG-E9147A (dBm)		
LTE BAND 5	QPSK @ 10 MHz BW	Cond Power	836.5	25.70	25.70	0	
5G NR BAND N5	QPSK @ 20 MHz BW	Cond Power	836.5	25.70	25.70	0	
LTE BAND 7	QPSK @ 20 MHz BW	Cond Power	2535.0	25.70	25.70	0.0	
5G NR BAND N7	BPSK @ 40 MHz BW	Cond Power	2535.0	25.70	25.70	0.0	
LTE BAND 12	QPSK @ 10 MHz BW	Cond Power	707.5	25.70	25.70	0.0	
5G NR BAND N12	QPSK @ 15 MHz BW	Cond Power	708.5	25.70	25.70	0.0	
LTE BAND 13	QPSK @ 10 MHz BW	Cond Power	782.0	25.70	25.70	0.0	
LTE BAND 17	QPSK @ 10 MHz BW	Cond Power	709.0	25.70	25.70	0.0	
LTE BAND 25	QPSK @ 20 MHz BW	Cond Power	1882.5	25.70	25.70	0.0	
5G NR BAND N25	BPSK @ 40 MHz BW	Cond Power	1882.5	25.70	25.70	0.0	
LTE BAND 26 (90S)	QPSK @ 10 MHz BW	Cond Power	819.0	25.70	25.70	0.0	
5G NR BAND N26 (90S)	BPSK @ 10 MHz BW	Cond Power	819.0	25.70	25.70	0.0	
LTE BAND 26 (P22)	QPSK @ 10 MHz BW	Cond Power	836.5	25.70	25.70	0.0	
5G NR BAND N26 (P22)	QPSK @ 20 MHz BW	Cond Power	839	25.70	25.70	0.0	
LTE BAND 30	QPSK @ 10 MHz BW	Cond Power	2310.0	25.70	25.70	0.0	
5G NR BAND N30	QPSK @ 10 MHz BW	Cond Power	2310.0	25.70	25.70	0.0	
LTE BAND 41	QPSK @ 20 MHz BW	Cond Power	2593.0	28.70	28.70	0.0	
5G NR BAND N41	BPSK @ 100 MHz BW	Cond Power	2593.0	28.70	28.70	0.0	
LTE BAND 48	QPSK @ 20 MHz BW	Cond Power	3620.0	25.70	25.70	0.0	
5G NR BAND N48	QPSK @ 40 MHz BW	Cond Power	3620.0	25.70	25.70	0.0	
LTE BAND 53	QPSK @ 10 MHz BW	Cond Power	2489.0	20.70	20.70	0.0	
5G NR BAND N53	BPSK @ 10 MHz BW	Cond Power	2489.0	20.70	20.70	0.0	
LTE BAND 66	QPSK @ 20 MHz BW	Cond Power	1745.0	25.70	25.70	0.0	
5G NR BAND N66	BPSK @ 40 MHz BW	Cond Power	1745.0	25.70	25.70	0.0	
5G NR BAND n70	BPSK @ 15 MHz BW	Cond Power	1702.5	25.70	25.70	0.0	
5G NR BAND N77	BPSK @ 100 MHz BW	Cond Power	3500.0	28.70	28.70	0.0	
5G NR BAND N77	BPSK @ 100 MHz BW	Cond Power	3840.0	28.70	28.70	0.0	

A3634 RADIATED SPOT CHECK RESULTS								
Technology	Worst Mode	Test Item	Measured Channel Frequency (MHz)	Original Model: A3575	Sub Model: A3634	Delta (dB)	Margin (dB)	Remarks
				FCC ID: BCG-E9145A (dBm)	FCC ID: BCG-E9147A (dBm)		M(dB)=C(dB)-R(dB)	
LTE BAND 7	QPSK @ highest BW	RSE	2535.0	-48.36	-45.88	2.48	23.36	Note 1
LTE BAND 25	QPSK @ highest BW	RSE	1882.5	-49.23	-47.67	1.56	36.23	Note 1
LTE BAND 26 (P22)	QPSK @ highest BW	RSE	829.0	-49.40	-48.50	0.90	36.40	Note 1
LTE BAND 48	QPSK @ 20 MHz BW	RSE	3690.0	-49.46	-48.78	0.68	9.46	Note 1

Note 1: Deviation is within the threshold to allow for full data referencing.

Note 2: Noise floor measurement.

Note 3: Deviation is larger then the threshold to allow for data referencing. As the full test for this band had significant margin to the limits (typically more than 20dB but always more than 15dB) additional tests for other bands were not considered necessary.Full set of measurements performed.

5.5. SPOT CHECK VERIFICATION RESULTS SUMMARY FOR A3635

A3635 ANTENNA PORT SPOT CHECK RESULTS							
Technology	Worst Mode	Test Item	Measured	Original Model: A3575	Sub Model: A3635	Delta (dB)	Remarks
			Frequency (MHz)	FCC ID :BCG-E9145A (dBm)	FCC ID: BCG-E9148A (dBm)		
GSM	GPRS 850	Cond Power	824.5	33.50	33.50	0.00	
	GPRS 1900	Cond Power	1850.2	32.00	32.00	0.00	
WCDMA	REL99 B5	Cond Power	836.5	25.70	25.70	0.00	
	REL99 B2	Cond Power	1880.0	25.70	25.70	0.00	
	REL99 B4	Cond Power	1732.5	25.70	25.70	0.00	

A3635 ANTENNA PORT SPOT CHECK RESULTS							
Technology	Worst Mode	Test Item	Measured	Original Model: A3575	Sub Model: A3635	Delta (dB)	Remarks
			Frequency (MHz)	FCC ID: BCG-E9145A (dBm)	FCC ID: BCG-E9148A (dBm)		
LTE 5CA	QPSK @ 10MHz+10MHz BW	Cond Power	834.1/844	25.7	25.7	0.00	
LTE 7CA	QPSK @ 20MHz+20MHz BW	Cond Power	2525.1/2544.9	25.7	25.7	0.00	
LTE 41CA	QPSK @ 20MHz+20MHz BW	Cond Power	2583.1/2602.9	28.7	28.7	0.00	
LTE 48CA	QPSK @ 20MHz+20MHz BW	Cond Power	3615.1/3634.9	24.7	24.7	0.00	

A3635 ANTENNA PORT SPOT CHECK RESULTS							
Technology	Worst Mode	Test Item	Measured	Original Model: A3575	Sub Model: A3635	Delta (dB)	Remarks
			Frequency (MHz)	FCC ID: BCG-E9145A (dBm)	FCC ID: BCG-E9148A (dBm)		
LTE BAND 5	QPSK @ 10 MHz BW	Cond Power	836.5	25.70	25.70	0	
5G NR BAND N5	QPSK @ 20 MHz BW	Cond Power	836.5	25.70	25.70	0	
LTE BAND 7	QPSK @ 20 MHz BW	Cond Power	2535.0	25.70	25.70	0.0	
5G NR BAND N7	BPSK @ 40 MHz BW	Cond Power	2535.0	25.70	25.70	0.0	
LTE BAND 12	QPSK @ 10 MHz BW	Cond Power	707.5	25.70	25.70	0.0	
5G NR BAND N12	QPSK @ 15 MHz BW	Cond Power	708.5	25.70	25.70	0.0	
LTE BAND 13	QPSK @ 10 MHz BW	Cond Power	782.0	25.70	25.70	0.0	
LTE BAND 17	QPSK @ 10 MHz BW	Cond Power	709.0	25.70	25.70	0.0	
LTE BAND 25	QPSK @ 20 MHz BW	Cond Power	1882.5	25.70	25.70	0.0	
5G NR BAND N25	BPSK @ 40 MHz BW	Cond Power	1882.5	25.70	25.70	0.0	
LTE BAND 26 (90S)	QPSK @ 10 MHz BW	Cond Power	819.0	25.70	25.70	0.0	
5G NR BAND N26 (90S)	QPSK @ 10 MHz BW	Cond Power	839.0	25.70	25.70	0.0	
LTE BAND 26 (P22)	QPSK @ 10 MHz BW	Cond Power	836.5	25.70	25.70	0.0	
5G NR BAND N26 (P22)	QPSK @ 20 MHz BW	Cond Power	836.5	25.70	25.70	0.0	
LTE BAND 30	QPSK @ 10 MHz BW	Cond Power	2310.0	25.70	25.70	0.0	
5G NR BAND N30	QPSK @ 10 MHz BW	Cond Power	2310.0	25.70	25.70	0.0	
LTE BAND 41	QPSK @ 20 MHz BW	Cond Power	2593.0	28.70	28.70	0.0	
5G NR BAND N41	BPSK @ 100 MHz BW	Cond Power	2593.0	28.70	28.70	0.0	
LTE BAND 48	QPSK @ 20 MHz BW	Cond Power	3620.0	25.70	26.00	0.3	
5G NR BAND N48	QPSK @ 40 MHz BW	Cond Power	3620.0	25.70	26.00	-0.3	
LTE BAND 66	QPSK @ 20 MHz BW	Cond Power	1745.0	25.70	25.70	0.0	
5G NR BAND N66	BPSK @ 40 MHz BW	Cond Power	1745.0	25.70	25.70	0.0	
5G NR BAND n70	BPSK @ 15 MHz BW	Cond Power	1702.5	25.70	25.70	0.0	
5G NR BAND N77	BPSK @ 100 MHz BW	Cond Power	3500.0	28.70	28.70	0.0	
5G NR BAND N77	BPSK @ 100 MHz BW	Cond Power	3840.0	28.70	28.70	0.0	

A3635 RADIATED SPOT CHECK RESULTS								
Technology	Worst Mode	Test Item	Measured Channel Frequency (MHz)	Original Model: A3575	Sub Model: A3635	Delta (dB)	Margin (dB)	Remarks
				FCC ID: BCG-E9145A (dBm)	FCC ID: BCG-E9148A (dBm)		M(dB)=C(dB)-R(dB)	
LTE BAND 7	QPSK @ highest BW	RSE	2535.0	-48.36	-48.48	-0.12	23.36	Note 1
LTE BAND 25	QPSK @ highest BW	RSE	1882.5	-49.23	-50.16	-0.93	36.23	Note 1
LTE BAND 26 (P22)	QPSK @ highest BW	RSE	829.0	-49.40	-50.51	-1.11	36.4	Note 1
LTE BAND 48	QPSK @ 20 MHz BW	RSE	3690.0	-49.46	-49.09	0.37	9.46	Note 1

Note 1: Deviation is within the threshold to allow for full data referencing.

Note 2: Noise floor measurement.

Note 3: Deviation is larger then the threshold to allow for data referencing. As the full test for this band had significant margin to the limits (typically more than 20dB but always more than 15dB) additional tests for other bands were not considered necessary.Full set of measurements performed

5.6. REFERENCE DETAIL

Reference application that contains the reused reference data.

Reference FCC ID	Varant model FCC IDs	Equipment Class	Reference test report / Data referencing sections
BCG-E9145A	BCG-E9147A	PCE	15941282-E10 / All sections 15941282-E11 / All sections 15941282-E12 / All sections 15941282-E15 / All sections except B71/n71 15941282-E16 / All sections 15941282-E17 / All sections 15941282-E18 / All sections 15941282-E19 / All sections 15941282-E20 / All sections
		CBE	15941282-E23 / All sections 15941282-E24 / All sections 15941282-E25 / All sections
		TNE	15941282-E13 / All sections 15941282-E14 / All sections
BCG-E9145A	BCG-E9148A	PCE	15941282-E10 / All sections 15941282-E11 / All sections 15941282-E12 / All sections 15941282-E15 / All sections except B71/n71 15941282-E16 / All sections 15941282-E17 / All sections 15941282-E18 / All sections 15941282-E19 / All sections 15941282-E20 / All sections
		CBE	15941282-E23 / All sections 15941282-E24 / All sections 15941282-E25 / All sections

5.7. SOFTWARE AND FIRMWARE

The EUT firmware installed during testing was version 2.00.60-7


5.8. SPOT CHECK WORST-CASE CONFIGURATION AND MODE

The spot checks were performed on the worst-case orientations and configurations based on the parent model of reference report.


5.9. DESCRIPTION OF TEST SETUP

SUPPORT TEST EQUIPMENT						
Description		Manufacturer	Model	Serial Number	FCC ID/ DoC	
Laptop		Apple	MacBook Pro	F5JJ42D7R9	BCGA1708	
Laptop		Apple	MacBook Pro	JWV2QWM0DT	BCGA2338	
Laptop		Apple	MacBook Pro	FG6Q9RW54Y	BCGA2338	
Laptop		Apple	MacBook Pro	XC2KF6F2D7	BCGA2338	
Laptop		Apple	MacBook Pro	YWCT4V933R	BCGA2338	
Laptop		Apple	MacBook Pro	HRP127004	BCGA2338	
AC/DC adapter		Apple	A1718	C4H64450HH3GN8RA6	--	
AC/DC adapter		Apple	A2130	F16H69002MD000000P	--	
AC/DC adapter		Apple	A1555 P	XQ76XLCJ2D	--	
I/O CABLES (RF CONDUCTED TEST)						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	3	US 115V	Un-shielded	2.0	N/A
2	USB	1	DC	Shielded	1.0	N/A
3	RF In/Out	2	SMA	Shielded	0.9	N/A
4	RF In/Out	1	Barrel	Shielded	N/A	N/A
I/O CABLES (RF RADIATED TEST)						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	RF In/Out	1	SMA	Shielded	5.0	N/A

CONDUCTED SETUP

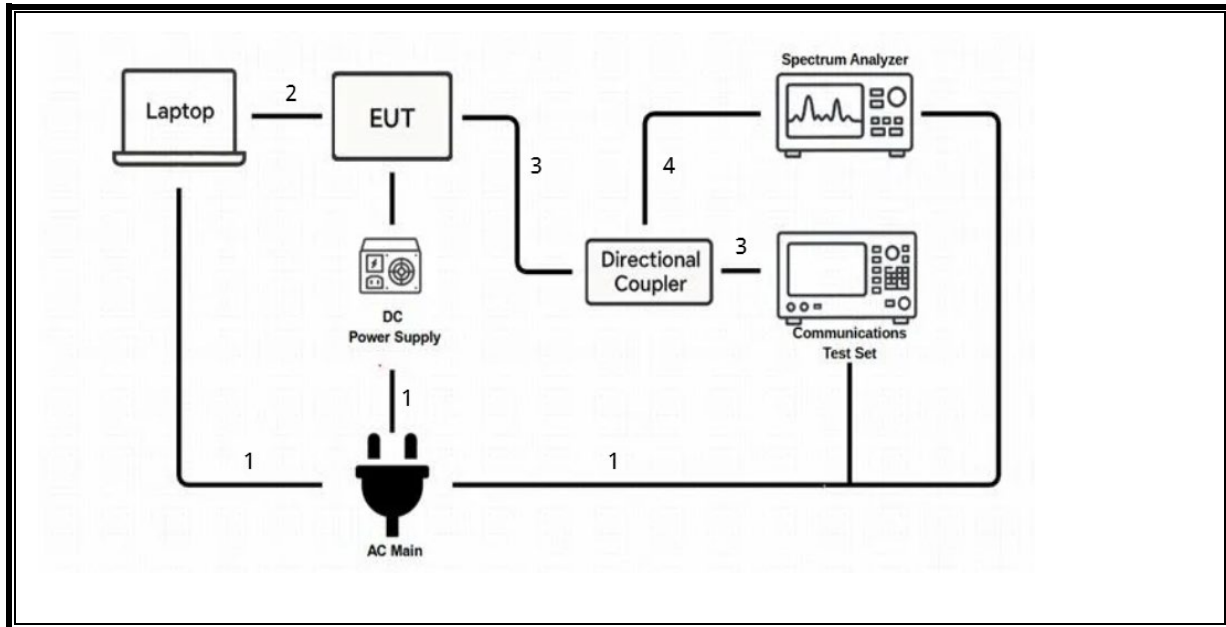

RADIATED SETUP

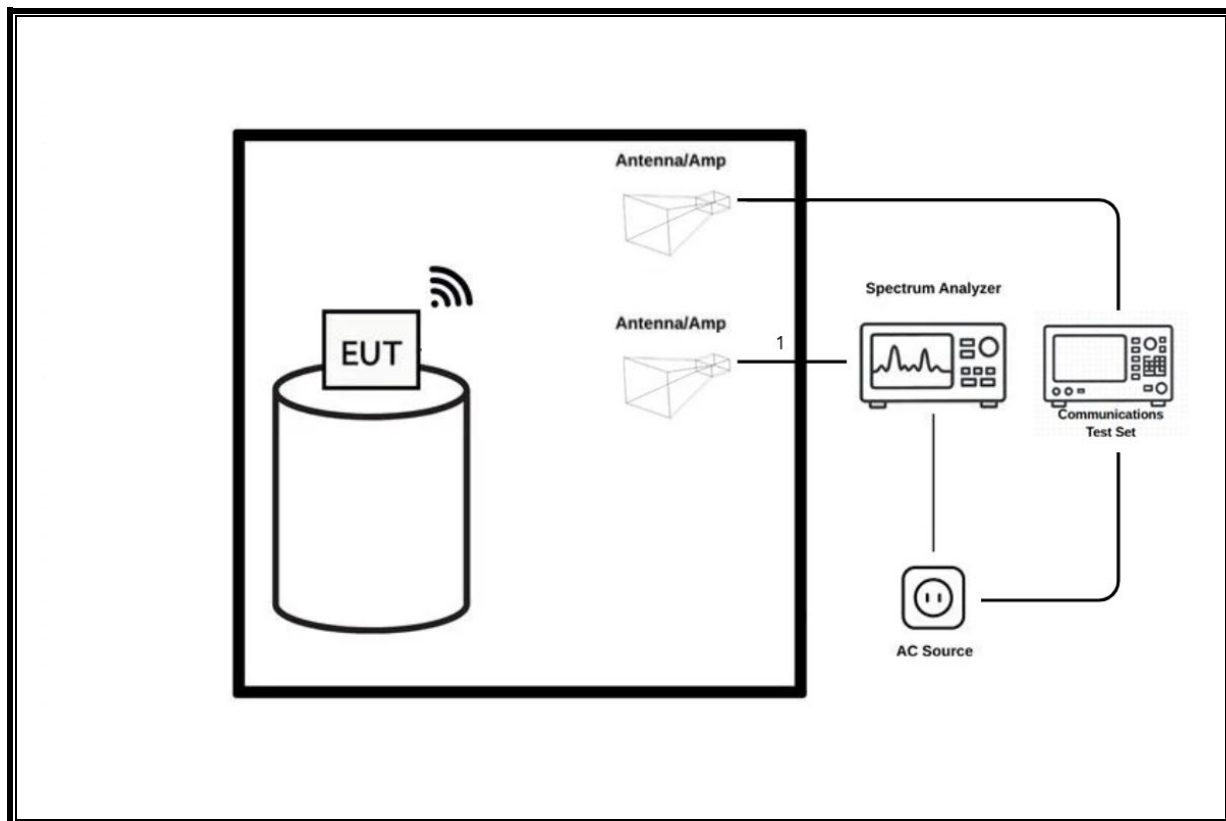

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment were utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Wideband Communication Test Set, Call Box	R&S GmbH & Co.	CMW500	230297	2026-02-28
EMI TEST RECEIVER	Rohde & Schwarz	ESW44	169936	2026-02-28
Antenna, Horn 1-18GHz	ETS Lindgren	3117	200897	2026-04-30
RF Filter Box, 1-18GHz, 12 Port	UL-FR1	Frankenstein	217255	2026-01-31
EMI TEST RECEIVER	Rohde & Schwarz	ESW44	223460	2026-02-28
RF Filter Box, 1-18GHz, 17 Port	UL-FR1	RATS 2	236726	2026-09-30
Antenna, Horn 1-18GHz	ETS Lindgren	3117	80403	2026-08-31
Antenna, Broadband Hybrid, 30MHz to 3GHz	Sunol Sciences Corp.	JB3	171863	2026-11-30
Amplifier 9 kHz - 1 GHz	SONOMA INSTRUMENT	310N	224490	2026-05-06
Antenna, Passive Loop 30Hz - 1MHz	ELECTRO-METRICS	EM-6871	170013	2026-09-30
Antenna, Passive Loop 100KHz - 30MHz	ELECTRO-METRICS	EM-6872	170015	2026-09-30
Antenna, Horn 18 to 26.5GHz	A.R.A.	MWH-1826/B	172353	2026-07-31
Link File, RF Amplifier Assembly, 18-26.5GHz, 60dB Gain	AMPLICAL	AMP18G26.5-60	220194	2026-04-29
Antenna, Horn 26.5-40GHz	A.R.A.	MWH-2640/B	81105	2027-10-31
Link File, RF Amplifier Assembly, 26.5-40GHz, 65dB Gain	Amplical	AMP26G40-65	220193	2026-04-30
PXA Signal Analyzer	Keysight Technologies Inc	N9030B	262735	2026-03-30
PXA Signal Analyzer	Keysight Technologies Inc	N9030B	231912	2026-04-30
PXA Signal Analyzer	Keysight Technologies Inc	N9030B	259079	2026-02-28
PXA Signal Analyzer	Keysight Technologies Inc	N9030B	262734	2026-04-30
Wideband Communication Call Box	Rohde & Schwarz	CMW500	230298	2026-02-28
Wideband Communication Call Box	Rohde & Schwarz	CMW500	85943	2026-02-28
Wideband Communication Call Box	Rohde & Schwarz	CMW500	262742	2027-02-11
Wideband Communication Call Box	Rohde & Schwarz	CMW500	262741	2027-02-11
Conducted Switch Box	N/A	CSB	221008	2026-04-30
Conducted Switch Box	N/A	CSB	262354	2026-04-30
Filter, BRF 3400-3800MHz, 18GHz max	Micro-Tronics	BRM50711	217364	2026-11-24
Filter, BRF 2305-2315	Micro-Tronics	BRC20553	224186	2026-06-29
Directional Coupler	KRYTAR	152610	254457	2026-09-04
Directional Coupler	KRYTAR	101040010K	254458	2026-09-04
Power Meter, P-series single channel	Keysight Technologies Inc	N1911A	90718	2026-03-31
Power Sensor, P - series, 50MHz to 18GHz, Wideband	Keysight Technologies Inc	N1921A	257704	2026-03-31
Chamber, Environmental	Cincinnati Sub Zero	ZPHS-8-3.5-SCT/WC	89097	2026-05-31
UL AUTOMATION SOFTWARE				
Conducted Software	UL	CLT	Ver.2023 11.21.0 & .2024.3.20.0	
Conducted Software	UL	Power Measurement	Ver 2023.08.14	
Conducted Software	UL	Antenna Port	Ver.2022.8.16	
Conducted Software	UL	Station Tool	Ver. 6.0,7.1, 10.1	
Radiated Software	UL	UL EMC	Ver 9.5, May 1, 2023	

Appendix A – Reference Test Report

Attached are the test reports (15941282-E10 to 15941282-E23) containing the reference data from the parent model as detailed in section 5.6.