

RADIATED TEST REPORT

Report Number: 15982152-E13V2 & E15V2

Applicant : APPLE INC.
1 APPLE PARK WAY
CUPERTINO, CA 95014, U.S.A.

Model : A3472

Brand : APPLE

FCC ID : BCG-E9186A (Parent)
BCG- E9192A, BCG- E9193A, BCG- E9194A (Variants)

IC : 579C- E9186A (Parent)
579C- E9192A, 579C- E9193A, 579C- E9194A (Variants)

EUT Description : SMARTPHONE

Test Standard(s) : FCC 47 CFR PART 15 SUBPART E
ISED RSS-248 ISSUE 3
ISED RSS-GEN ISSUE 5 + A1 + A2

Date Of Issue:
2026-07-13

Prepared by:
UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538 U.S.A.
TEL: (510) 319-4000
FAX: (510) 661-0888



REPORT REVISION HISTORY

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V1	2026-06-29	Initial Review	---
V2	2026-07-13	Addresses TCB comments	Sahdev Badyal

TABLE OF CONTENTS

1. RADIATED TEST RESULTS	4
1.1. TRANSMITTER OUTSIDE 5.925 - 7.125 GHz, 1- 18GHz (Dual Client)	7
1.1.1. 802.11be SISO SU MODE IN UNII-5 BAND – BANDEDGE	7
1.1.2. 802.11be SISO RU MODE IN UNII-5 BAND - BANDEDGE	8
1.1.3. 802.11be MIMO SU MODE IN UNII-5 BAND - BANDEDGE	9
1.1.4. 802.11be MIMO PARTIAL RU MODE IN UNII-5 BAND - BANDEDGE	10
1.1.5. 802.11be MIMO MODE IN UNII-5 BAND – SPURIOUS EMISSIONS	13
1.1.6. 802.11be MIMO MODE IN UNII-6 BAND – SPURIOUS EMISSIONS	20
1.1.7. 802.11be MIMO MODE IN UNII-7 BAND – SPURIOUS EMISSIONS	27
1.1.8. 802.11a SISO MODE IN UNII-8 BAND – BANDEDGE	34
1.1.9. 802.11be SISO SU MODE IN UNII-8 BAND – BANDEDGE	35
1.1.10. 802.11be SISO RU MODE IN UNII-8 BAND - BANDEDGE	36
1.1.11. 802.11a MIMO MODE IN UNII-8 BAND – BANDEDGE	37
1.1.12. 802.11be MIMO SU MODE IN UNII-8 BAND – BANDEDGE	38
1.1.13. 802.11be MIMO PARTIAL RU MODE IN UNII-8 BAND – BANDEDGE	39
1.1.14. 802.11a MIMO MODE IN UNII-8 BAND – SPURIOUS EMISSIONS	42
1.1.15. 802.11be MIMO MODE IN UNII-8 BAND – SPURIOUS EMISSIONS	43
1.2. TRANSMITTER OUTSIDE 6.115 - 7.125 GHz, 1- 18GHz (VLP)	50
1.2.1. 802.11be SISO/MIMO MODE IN UNII-5 BAND – LOW BANDEDGE	50
1.2.2. 802.11a SISO MODE IN UNII-8 BAND – BANDEDGE	50
1.2.3. 802.11be SISO SU MODE IN UNII-8 BAND – BANDEDGE	51
1.2.4. 802.11be SISO PARTIAL RU MODE IN UNII-8 BAND – BANDEDGE	52
1.2.5. 802.11a MIMO MODE IN UNII-8 BAND – BANDEDGE	53
1.2.6. 802.11be MIMO SU MODE IN UNII-8 BAND – BANDEDGE	54
1.2.7. 802.11be MIMO PARTIAL RU MODE IN UNII-8 BAND – BANDEDGE	55
1.2.8. 802.11a MIMO MODE IN UNII-8 BAND – SPURIOUS EMISSIONS	58
1.2.9. 802.11be MIMO MODE – SPURIOUS EMISSIONS	59
1.3. WORST CASE BELOW 1 GHz	65
1.4. WORST CASE 18-26 GHz	67
1.5. WORST CASE 26-40 GHz	69
2. AC POWER LINE CONDUCTED EMISSIONS	71
2.1. EUT WITH AC ADAPTER	72
2.2. EUT WITH LAPTOP	74
3. SETUP PHOTOS	76

1. RADIATED TEST RESULTS

LIMITS

FCC §15.35(b)
FCC §15.205 Restricted bands
§15.209 and FCC §15.407(b)(6) -Un-Restricted bands

RSS-GEN 8.1 HZ
RSS-GEN 8.9 Un-Restricted bands
RSS-GEN 8.10 Restricted bands
RSS 248 Issue 3 section 4.6.2a

Any emissions outside of the 5.925-7.125 GHz band must not exceed an e.i.r.p. of -27dBm/MHz rms and -7dBm/MHz Peak.

General field strength limits at frequencies above 30 MHz;

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

Unwanted Emissions in Restricted Bands	KDB 789033 D02, Sections II - G.3, G.4, G.5, and G.6
Unwanted Emissions in Non-Restricted Bands	KDB 789033 D02, Sections II - G.3, G.4, and G.5
Radiated Spurious Emissions Below 30MHz	ANSI C63.10, Section 6.4

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements in the 30-1000MHz range, 9kHz for peak and/or quasi-peak detection measurements in the 0.15-30MHz range, and 200Hz for peak and/or quasi-peak detection measurements in the 9 to 150kHz range. Peak detection is used unless otherwise noted as quasi-peak or average (9-90kHz and 110-490kHz).

For pre-scans above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 30 kHz for peak measurements.

For final measurements above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements and as applicable for average measurements.

The spectrum from 30 MHz to 1GHz and 18GHz to 40 GHz is investigated with the transmitter set to transmit at the channel with highest output power as worst-case scenario. 1GHz to 18GHz was set to the lowest, middle, and highest channels in the 6 GHz bands.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

Note: The limits in CFR 47, Part 15, Subpart C, paragraph 15.209(a), are identical to those in RSS-Gen section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as report in the table) using free space impedance of 377 Ohms. For example, the measurement at frequency X kHz resulted in a level of Y dBuV/m, which is equivalent to $Y-51.5 = Z$ dBuA/m, which has the same margin, W dB to the corresponding RSS-Gen Table 6 limit as it has to 15.209(a) limit. In addition:

RESULTS

The plots in these sections are for reference settings only for different bandwidths and different antennas.

KDB 414788 Open Field Site (OFS) and Chamber Correlation Justification

Based on FCC 15.31 (f) (2), measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed, and the chamber-measured test result is the worst-case test result.

1.1. TRANSMITTER OUTSIDE 5.925 - 7.125 GHz, 1- 18GHz (Dual Client)

1.1.1. 802.11be SISO SU MODE IN UNII-5 BAND – BANDEDGE

UNII-5 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (SU Mode)	5955	6	5.925	-51.15	Pk	35.2	11.8	0	-29.9	-34.05	-	-	-7	-27.05	230	184	H
			5.924802	-48.52	Pk	35.2	11.8	0	-29.9	-31.42	-	-	-7	-24.42	230	184	H
			5.925	-64.37	RMS	35.2	11.8	0	-29.9	-47.27	-27	-20.27	-	-	230	184	H
			5.924868	-63.91	RMS	35.2	11.8	0	-29.9	-46.81	-27	-19.81	-	-	230	184	H
			5.925	-44.76	Pk	35.2	11.8	0	-29.9	-27.66	-	-	-7	-20.66	337	243	V
			5.924935	-46.35	Pk	35.2	11.8	0	-29.9	-29.25	-	-	-7	-22.25	337	243	V
		16	5.925	-62.01	RMS	35.2	11.8	0	-29.9	-44.91	-27	-17.91	-	-	337	243	V
			5.924735	-62.21	RMS	35.2	11.8	0	-29.9	-45.11	-27	-18.11	-	-	337	243	V
			5.925	-43.57	Pk	35.3	11.8	0	-34.74	-31.21	-	-	-7	-24.21	316	238	H
			5.923868	-39.75	Pk	35.3	11.8	0	-34.72	-27.37	-	-	-7	-20.37	316	238	H
			5.925	-58.47	RMS	35.3	11.8	0	-34.74	-46.11	-27	-19.11	-	-	316	238	H
			5.924268	-58.01	RMS	35.3	11.8	0	-34.73	-45.64	-27	-18.64	-	-	316	238	H
			5.925	-50.46	Pk	35.3	11.8	0	-34.74	-38.1	-	-	-7	-31.1	270	169	V
			5.924402	-48.26	Pk	35.3	11.8	0	-34.73	-35.89	-	-	-7	-28.89	270	169	V
			5.925	-61.87	RMS	35.3	11.8	0	-34.74	-49.51	-27	-22.51	-	-	270	169	V
			5.923935	-61.25	RMS	35.3	11.8	0	-34.72	-48.87	-27	-21.87	-	-	270	169	V
EHT40 (SU Mode)	5965	6	5.925	-34.3	Pk	35.3	11.8	0	-34.74	-21.94	-	-	-7	-14.94	66	188	H
			5.923468	-33.13	Pk	35.3	11.8	0	-34.72	-20.75	-	-	-7	-13.75	66	188	H
			5.925	-51.83	RMS	35.3	11.8	0	-34.74	-39.47	-27	-12.47	-	-	66	188	H
			5.924802	-49.46	RMS	35.3	11.8	0	-34.74	-37.1	-27	-10.1	-	-	66	188	H
			5.925	-31.78	Pk	35.3	11.8	0	-34.74	-19.42	-	-	-7	-12.42	170	151	V
			5.924935	-29.18	Pk	35.3	11.8	0	-34.74	-16.82	-	-	-7	-9.82	170	151	V
		16	5.925	-46.76	RMS	35.3	11.8	0	-34.74	-34.4	-27	-7.4	-	-	170	151	V
			5.924668	-46.19	RMS	35.3	11.8	0	-34.73	-33.82	-27	-6.82	-	-	170	151	V
			5.925	-27.64	Pk	35.3	11.8	0	-34.74	-15.28	-	-	-7	-8.28	334	216	H
			5.924402	-24.02	Pk	35.3	11.8	0	-34.73	-11.65	-	-	-7	-4.65	334	216	H
			5.925	-43.78	RMS	35.3	11.8	0	-34.74	-31.42	-27	-4.42	-	-	334	216	H
			5.924868	-42.19	RMS	35.3	11.8	0	-34.74	-29.83	-27	-2.83	-	-	334	216	H
			5.925	-39.59	Pk	35.3	11.8	0	-34.74	-27.23	-	-	-7	-20.23	268	189	V
			5.923601	-36.84	Pk	35.3	11.8	0	-34.72	-24.46	-	-	-7	-17.46	268	189	V
			5.925	-54.25	RMS	35.3	11.8	0	-34.74	-41.89	-27	-14.89	-	-	268	189	V
			5.924068	-53.49	RMS	35.3	11.8	0	-34.72	-41.11	-27	-14.11	-	-	268	189	V
EHT80 (SU Mode)	5985	6	5.925	-36.61	Pk	35.3	11.8	0	-34.74	-24.25	-	-	-7	-17.25	66	158	H
			5.923735	-34.27	Pk	35.3	11.8	0	-34.72	-21.89	-	-	-7	-14.89	66	158	H
			5.925	-50.23	RMS	35.3	11.8	0	-34.74	-37.87	-27	-10.87	-	-	66	158	H
			5.923668	-49.67	RMS	35.3	11.8	0	-34.72	-37.29	-27	-10.29	-	-	66	158	H
			5.925	-31.05	Pk	35.3	11.8	0	-34.74	-18.69	-	-	-7	-11.69	172	223	V
			5.924602	-28.53	Pk	35.3	11.8	0	-34.73	-16.16	-	-	-7	-9.16	172	223	V
		16	5.925	-45.46	RMS	35.3	11.8	0	-34.74	-33.1	-27	-6.1	-	-	172	223	V
			5.924068	-44.44	RMS	35.3	11.8	0	-34.72	-32.06	-27	-5.06	-	-	172	223	V
			5.925	-29.55	Pk	35.3	11.8	0	-34.74	-17.19	-	-	-7	-10.19	332	216	H
			5.922535	-27.07	Pk	35.3	11.8	0	-34.73	-14.7	-	-	-7	-7.7	332	216	H
			5.925	-44.09	RMS	35.3	11.8	0	-34.74	-31.73	-27	-4.73	-	-	332	216	H
			5.924802	-43.21	RMS	35.3	11.8	0	-34.74	-30.85	-27	-3.85	-	-	332	216	H
			5.925	-43.15	Pk	35.3	11.8	0	-34.74	-30.79	-	-	-7	-23.79	238	156	V
			5.924335	-41.29	Pk	35.3	11.8	0	-34.73	-28.92	-	-	-7	-21.92	238	156	V
			5.925	-55.63	RMS	35.3	11.8	0	-34.74	-43.27	-27	-16.27	-	-	238	156	V
			5.922668	-55.67	RMS	35.3	11.8	0	-34.73	-43.3	-27	-16.3	-	-	238	156	V
EHT160 (SU Mode)	6025	6	5.925	-36.39	Pk	35.3	11.8	0	-34.74	-24.03	-	-	-7	-17.03	274	241	H
			5.901401	-32.74	Pk	35.2	11.8	0	-34.91	-20.65	-	-	-7	-13.65	274	241	H
			5.925	-49.2	RMS	35.3	11.8	0.14	-34.74	-36.7	-27	-9.7	-	-	274	241	H
			5.922001	-47.89	RMS	35.3	11.8	0.14	-34.75	-35.4	-27	-8.4	-	-	274	241	H
			5.925	-31.47	Pk	35.3	11.8	0	-34.74	-19.11	-	-	-7	-12.11	164	224	V
			5.901468	-28.06	Pk	35.2	11.8	0	-34.91	-15.97	-	-	-7	-8.97	164	224	V
		16	5.925	-43.48	RMS	35.3	11.8	0.14	-34.74	-30.98	-27	-3.98	-	-	164	224	V
			5.924202	-42.87	RMS	35.3	11.8	0.14	-34.72	-30.35	-27	-3.35	-	-	164	224	V
			5.925	-29.44	Pk	35.3	11.8	0	-34.74	-17.08	-	-	-7	-10.08	327	102	H
			5.901335	-26.51	Pk	35.2	11.8	0	-34.91	-14.42	-	-	-7	-7.42	327	102	H
			5.925	-43.23	RMS	35.3	11.8	0.14	-34.74	-30.73	-27	-3.73	-	-	327	102	H
			5.919268	-41.99	RMS	35.2	11.8	0.14	-34.77	-29.62	-27	-2.62	-	-	327	102	H
			5.925	-41.47	Pk	35.3	11.8	0	-34.74	-29.11	-	-	-7	-22.11	261	190	V
			5.901268	-36.89	Pk	35.2	11.8	0	-34.91	-24.8	-	-	-7	-17.8	261	190	V
			5.925	-53.73	RMS	35.3	11.8	0.14	-34.74	-41.23	-27	-14.23	-	-	261	190	V
			5.923801	-52.97	RMS	35.3	11.8	0.14	-34.72	-40.45	-27	-13.45	-	-	261	190	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.2. 802.11be SISO RU MODE IN UNII-5 BAND - BANDEDGE

UNII-5 (SISO)	Channel Frequency MHz	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (26T RU0)	5955	6	5.925000	-44.79	Pk	35.3	11.8	0.00	-34.74	-32.43	-	-	-7	-25.43	278	208	H
			5.924802	-43.92	Pk	35.3	11.8	0.00	-34.74	-31.56	-	-	-7	-24.56	278	208	H
			5.925000	-62.59	RMS	35.3	11.8	0.00	-34.74	-50.23	-27	-23.23	-	-	278	208	H
			5.922801	-61.90	RMS	35.3	11.8	0.00	-34.73	-49.53	-27	-22.53	-	-	278	208	H
			5.925000	-40.76	Pk	35.3	11.8	0.00	-34.74	-28.40	-	-	-7	-21.40	168	214	V
			5.924935	-40.12	Pk	35.3	11.8	0.00	-34.74	-27.76	-	-	-7	-20.76	168	214	V
		16	5.925000	-58.59	RMS	35.3	11.8	0.00	-34.74	-46.23	-27	-19.23	-	-	168	214	V
			5.924402	-60.87	RMS	35.3	11.8	0.00	-34.73	-48.50	-27	-21.50	-	-	168	214	V
			5.874001	-48.05	Pk	35.0	11.8	0.00	-36.40	-37.65	-	-	-7	-30.65	334	201	H
			5.916335	-60.32	RMS	35.2	11.8	0.00	-36.30	-49.62	-27	-22.62	-	-	334	201	H
			5.925000	-50.67	Pk	35.2	11.8	0.00	-36.20	-39.87	-	-	-7	-32.87	334	201	H
			5.925000	-61.22	RMS	35.2	11.8	0.00	-36.20	-50.42	-27	-23.42	-	-	334	201	H
			5.899201	-48.07	Pk	35.1	11.8	0.00	-36.40	-37.57	-	-	-7	-30.57	264	177	V
			5.906268	-60.46	RMS	35.2	11.8	0.00	-36.20	-49.66	-27	-22.66	-	-	264	177	V
			5.925000	-51.08	Pk	35.2	11.8	0.00	-36.20	-40.28	-	-	-7	-33.28	264	177	V
			5.925000	-61.70	RMS	35.2	11.8	0.00	-36.20	-50.90	-27	-23.90	-	-	264	177	V
EHT20 (52+26T RU70)	5955	6	5.925000	-51.91	Pk	35.3	11.8	0.00	-34.74	-39.55	-	-	-7	-32.55	61	144	H
			5.889268	-49.63	Pk	35.2	11.8	0.00	-34.95	-37.58	-	-	-7	-30.58	61	144	H
			5.925000	-62.89	RMS	35.3	11.8	0.00	-34.74	-50.53	-27	-23.53	-	-	61	144	H
			5.904268	-61.54	RMS	35.2	11.8	0.00	-34.87	-49.41	-27	-22.41	-	-	61	144	H
			5.925000	-51.83	Pk	35.3	11.8	0.00	-34.74	-39.47	-	-	-7	-32.47	173	117	V
			5.860401	-49.65	Pk	35.2	11.8	0.00	-34.91	-37.56	-	-	-7	-30.56	173	117	V
		16	5.925000	-62.74	RMS	35.3	11.8	0.00	-34.74	-50.38	-27	-23.38	-	-	173	117	V
			5.911735	-61.39	RMS	35.2	11.8	0.00	-34.82	-49.21	-27	-22.21	-	-	173	117	V
			5.701067	-47.17	Pk	35.0	11.8	0.00	-36.91	-37.28	-	-	-7	-30.28	335	201	H
			5.923135	-60.17	RMS	35.2	11.8	0.00	-36.11	-49.28	-27	-22.28	-	-	335	201	H
			5.925000	-51.10	Pk	35.2	11.8	0.00	-36.20	-40.30	-	-	-7	-33.30	335	201	H
			5.925000	-60.66	RMS	35.2	11.8	0.00	-36.20	-49.86	-27	-22.86	-	-	335	201	H
			5.639400	-47.29	Pk	35.0	11.8	0.00	-37.10	-37.59	-	-	-7	-30.59	263	177	V
			5.922468	-60.68	RMS	35.2	11.8	0.00	-36.15	-49.83	-27	-22.83	-	-	263	177	V
			5.925000	-50.47	Pk	35.2	11.8	0.00	-36.20	-39.67	-	-	-7	-32.67	263	177	V
			5.925000	-61.70	RMS	35.2	11.8	0.00	-36.20	-50.90	-27	-23.90	-	-	263	177	V
EHT80 (484+242 T RU93)	5985	6	5.925000	-40.93	Pk	35.1	11.8	0.00	-34.36	-28.39	-	-	-7	-21.39	15	158	H
			5.919068	-40.05	Pk	35.1	11.8	0.00	-34.36	-27.51	-	-	-7	-20.51	15	158	H
			5.925000	-60.33	RMS	35.1	11.8	0.00	-34.36	-47.79	-27	-20.79	-	-	15	158	H
			5.923801	-59.01	RMS	35.1	11.8	0.00	-34.36	-46.47	-27	-19.47	-	-	15	158	H
			5.925000	-35.25	Pk	35.1	11.8	0.00	-34.36	-22.71	-	-	-7	-15.71	125	212	V
			5.924735	-33.13	Pk	35.1	11.8	0.00	-34.36	-20.59	-	-	-7	-13.59	125	212	V
		16	5.925000	-54.93	RMS	35.1	11.8	0.00	-34.36	-42.39	-27	-15.39	-	-	125	212	V
			5.924468	-53.52	RMS	35.1	11.8	0.00	-34.36	-40.98	-27	-13.98	-	-	125	212	V
			5.925000	-37.23	Pk	35.6	11.8	0.00	-36.66	-26.49	-	-	-7	-19.49	189	168	H
			5.922001	-33.57	Pk	35.6	11.8	0.00	-36.68	-22.85	-	-	-7	-15.85	189	168	H
			5.925000	-53.17	RMS	35.6	11.8	0.00	-36.66	-42.43	-27	-15.43	-	-	189	168	H
			5.923935	-52.12	RMS	35.6	11.8	0.00	-36.69	-41.41	-27	-14.41	-	-	189	168	H
			5.925000	-47.44	Pk	35.6	11.8	0.00	-36.66	-36.70	-	-	-7	-29.70	168	216	V
			5.921735	-45.62	Pk	35.6	11.8	0.00	-36.69	-34.91	-	-	-7	-27.91	168	216	V
			5.925000	-60.40	RMS	35.6	11.8	0.00	-36.66	-49.66	-27	-22.66	-	-	168	216	V
			5.924802	-60.13	RMS	35.6	11.8	0.00	-36.67	-49.40	-27	-22.40	-	-	168	216	V
EHT160 (996+484 T S95)	6025	6	5.925000	-38.46	Pk	35.4	11.8	0.00	-37.10	-28.36	-	-	-7	-21.36	185	177	H
			5.872335	-34.03	Pk	35.4	11.8	0.00	-37.30	-24.13	-	-	-7	-17.13	185	177	H
			5.925000	-51.16	RMS	35.4	11.8	0.00	-37.10	-41.06	-27	-14.06	-	-	185	177	H
			5.919535	-50.96	RMS	35.4	11.8	0.00	-37.10	-40.86	-27	-13.86	-	-	185	177	H
			5.925000	-32.24	Pk	35.4	11.8	0.00	-37.10	-22.14	-	-	-7	-15.14	288	209	V
			5.872268	-29.07	Pk	35.4	11.8	0.00	-37.30	-19.17	-	-	-7	-12.17	288	209	V
		16	5.925000	-46.05	RMS	35.4	11.8	0.00	-37.10	-35.95	-27	-8.95	-	-	288	209	V
			5.923668	-45.46	RMS	35.4	11.8	0.00	-37.10	-35.36	-27	-8.36	-	-	288	209	V
			5.925000	-35.18	Pk	35.6	11.8	0.00	-36.66	-24.44	-	-	-7	-17.44	193	196	H
			5.872135	-32.89	Pk	35.3	11.8	0.00	-36.63	-22.42	-	-	-7	-15.42	193	196	H
			5.925000	-50.29	RMS	35.6	11.8	0.00	-36.66	-39.55	-27	-12.55	-	-	193	196	H
			5.924935	-49.64	RMS	35.6	11.8	0.00	-36.66	-38.90	-27	-11.90	-	-	193	196	H
			5.925000	-50.72	Pk	35.6	11.8	0.00	-36.66	-39.98	-	-	-7	-32.98	159	131	V
			5.872135	-45.28	Pk	35.3	11.8	0.00	-36.63	-34.81	-	-	-7	-27.81	159	131	V
			5.925000	-60.95	RMS	35.6	11.8	0.00	-36.66	-50.21	-27	-23.21	-	-	159	131	V
			5.923068	-59.71	RMS	35.6	11.8	0.00	-36.67	-48.98	-27	-21.98	-	-	159	131	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.3. 802.11be MIMO SU MODE IN UNII-5 BAND - BANDEDGE

UNII-5 (MIMO CDD)	Channel Frequency MHz	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Los s (dB)	Corrected Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (SU Mode)	5955	6+16	5.925000	-38.00	Pk	35.3	11.8	0.00	-34.74	-25.64	-	-	-7	-18.64	322	241	H
			5.924735	-36.43	Pk	35.3	11.8	0.00	-34.73	-24.06	-	-	-7	-17.06	322	241	H
			5.925000	-52.96	RMS	35.3	11.8	0.00	-34.74	-40.60	-27	-13.60	-	-	322	241	H
			5.924602	-52.05	RMS	35.3	11.8	0.00	-34.73	-39.68	-27	-12.68	-	-	322	241	H
			5.925000	-46.10	Pk	35.3	11.8	0.00	-34.74	-33.74	-	-	-7	-26.74	3	244	V
			5.924335	-41.41	Pk	35.3	11.8	0.00	-34.73	-29.04	-	-	-7	-22.04	3	244	V
			5.925000	-58.09	RMS	35.3	11.8	0.00	-34.74	-45.73	-27	-18.73	-	-	3	244	V
			5.924735	-58.08	RMS	35.3	11.8	0.00	-34.73	-45.71	-27	-18.71	-	-	3	244	V
EHT40 (SU Mode)	5965	6+16	5.925000	-27.74	Pk	35.3	11.8	0.00	-34.74	-15.38	-	-	-7	-8.38	46	233	H
			5.920068	-25.65	Pk	35.2	11.8	0.00	-34.76	-13.41	-	-	-7	-6.41	46	233	H
			5.925000	-42.74	RMS	35.3	11.8	0.00	-34.74	-30.38	-27	-3.38	-	-	46	233	H
			5.924802	-42.62	RMS	35.3	11.8	0.00	-34.74	-30.26	-27	-3.26	-	-	46	233	H
			5.925000	-33.11	Pk	35.3	11.8	0.00	-34.74	-20.75	-	-	-7	-13.75	352	256	V
			5.923135	-32.75	Pk	35.3	11.8	0.00	-34.72	-20.37	-	-	-7	-13.37	352	256	V
			5.925000	-51.59	RMS	35.3	11.8	0.00	-34.74	-39.23	-27	-12.23	-	-	352	256	V
			5.924668	-49.95	RMS	35.3	11.8	0.00	-34.73	-37.58	-27	-10.58	-	-	352	256	V
EHT80 (SU Mode)	5985	6+16	5.925000	-28.13	Pk	35.3	11.8	0.00	-34.74	-15.77	-	-	-7	-8.77	333	226	H
			5.914401	-26.97	Pk	35.2	11.8	0.00	-34.80	-14.77	-	-	-7	-7.77	333	226	H
			5.925000	-43.51	RMS	35.3	11.8	0.00	-34.74	-31.15	-27	-4.15	-	-	333	226	H
			5.920935	-42.67	RMS	35.2	11.8	0.00	-34.75	-30.42	-27	-3.42	-	-	333	226	H
			5.925000	-39.95	Pk	35.3	11.8	0.00	-34.74	-27.59	-	-	-7	-20.59	263	176	V
			5.920335	-38.19	Pk	35.2	11.8	0.00	-34.76	-25.95	-	-	-7	-18.95	263	176	V
			5.925000	-53.30	RMS	35.3	11.8	0.00	-34.74	-40.94	-27	-13.94	-	-	263	176	V
			5.920468	-53.50	RMS	35.2	11.8	0.00	-34.76	-41.26	-27	-14.26	-	-	263	176	V
EHT160 (SU Mode)	6025	6+16	5.925000	-30.84	Pk	35.3	11.8	0.00	-34.74	-18.48	-	-	-7	-11.48	217	264	H
			5.915535	-27.46	Pk	35.2	11.8	0.00	-34.79	-15.25	-	-	-7	-8.25	217	264	H
			5.925000	-43.86	RMS	35.3	11.8	0.14	-34.74	-31.36	-27	-4.36	-	-	217	264	H
			5.919935	-42.55	RMS	35.2	11.8	0.14	-34.76	-30.17	-27	-3.17	-	-	217	264	H
			5.925000	-38.33	Pk	35.3	11.8	0.00	-34.74	-25.97	-	-	-7	-18.97	192	271	V
			5.898401	-33.10	Pk	35.2	11.8	0.00	-34.88	-20.98	-	-	-7	-13.98	192	271	V
			5.925000	-51.46	RMS	35.3	11.8	0.14	-34.74	-38.96	-27	-11.96	-	-	192	271	V
			5.923468	-48.79	RMS	35.3	11.8	0.14	-34.72	-36.27	-27	-9.27	-	-	192	271	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection


1.1.4. 802.11be MIMO PARTIAL RU MODE IN UNII-5 BAND - BANDEDGE

UNII-5 (MIMO CDD)	Channel Frequency MHz	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (26T RU0)	5955	6+16	5.923401	-59.78	RMS	35.2	11.8	0.00	-36.14	-48.92	-27	-21.92	-	-	231	201	H
			5.924668	-37.14	Pk	35.2	11.8	0.00	-36.20	-26.34	-	-	-7	-19.34	231	201	H
			5.925000	-37.27	Pk	35.2	11.8	0.00	-36.20	-26.47	-	-	-7	-19.47	231	201	H
			5.925000	-60.53	RMS	35.2	11.8	0.00	-36.20	-49.73	-27	-22.73	-	-	231	201	H
			5.911668	-60.31	RMS	35.2	11.8	0.00	-36.27	-49.58	-27	-22.58	-	-	172	189	V
			5.924802	-46.94	Pk	35.2	11.8	0.00	-36.20	-36.14	-	-	-7	-29.14	172	189	V
			5.925000	-48.62	Pk	35.2	11.8	0.00	-36.20	-37.82	-	-	-7	-30.82	172	189	V
			5.925000	-61.54	RMS	35.2	11.8	0.00	-36.20	-50.74	-27	-23.74	-	-	172	189	V
EHT20 (52+26T RU70)	5955	6+16	5.925000	-49.39	Pk	35.4	11.8	0.00	-37.10	-39.29	-	-	-7	-32.29	84	193	H
			5.923335	-47.09	Pk	35.4	11.8	0.00	-37.10	-36.99	-	-	-7	-29.99	84	193	H
			5.925000	-60.96	RMS	35.4	11.8	0.00	-37.10	-50.86	-27	-23.86	-	-	84	193	H
			5.911068	-59.21	RMS	35.4	11.8	0.00	-37.20	-49.21	-27	-22.21	-	-	84	193	H
			5.925000	-50.49	Pk	35.4	11.8	0.00	-37.10	-40.39	-	-	-7	-33.39	329	351	V
			5.921535	-47.94	Pk	35.4	11.8	0.00	-37.10	-37.84	-	-	-7	-30.84	329	351	V
			5.925000	-61.31	RMS	35.4	11.8	0.00	-37.10	-51.21	-27	-24.21	-	-	329	351	V
			5.848668	-59.65	RMS	35.3	11.8	0.00	-37.30	-49.85	-27	-22.85	-	-	329	351	V
EHT80 (484+242 T RU93)	5985	6+16	5.925000	-31.17	Pk	35.1	11.8	0.00	-34.36	-18.63	-	-	-7	-11.63	106	206	H
			5.924868	-30.87	Pk	35.1	11.8	0.00	-34.36	-18.33	-	-	-7	-11.33	106	206	H
			5.925000	-53.13	RMS	35.1	11.8	0.00	-34.36	-40.59	-27	-13.59	-	-	106	206	H
			5.916135	-52.21	RMS	35.1	11.8	0.00	-34.37	-39.68	-27	-12.68	-	-	106	206	H
			5.925000	-43.49	Pk	35.1	11.8	0.00	-34.36	-30.95	-	-	-7	-23.95	56	184	V
			5.924868	-42.27	Pk	35.1	11.8	0.00	-34.36	-29.73	-	-	-7	-22.73	56	184	V
			5.925000	-60.96	RMS	35.1	11.8	0.00	-34.36	-48.42	-27	-21.42	-	-	56	184	V
			5.920335	-60.88	RMS	35.1	11.8	0.00	-34.36	-48.34	-27	-21.34	-	-	56	184	V
EHT160 (996+484 T S95)	6025	6+16	5.925000	-35.74	Pk	35.4	11.8	0.00	-37.10	-25.64	-	-	-7	-18.64	275	202	H
			5.872135	-31.79	Pk	35.4	11.8	0.00	-37.30	-21.89	-	-	-7	-14.89	275	202	H
			5.925000	-50.94	RMS	35.4	11.8	0.00	-37.10	-40.84	-27	-13.84	-	-	275	202	H
			5.920735	-50.73	RMS	35.4	11.8	0.00	-37.10	-40.63	-27	-13.63	-	-	275	202	H
			5.925000	-48.42	Pk	35.4	11.8	0.00	-37.10	-38.32	-	-	-7	-31.32	172	163	V
			5.872335	-42.69	Pk	35.4	11.8	0.00	-37.30	-32.79	-	-	-7	-25.79	172	163	V
			5.925000	-59.06	RMS	35.4	11.8	0.00	-37.10	-48.96	-27	-21.96	-	-	172	163	V
			5.924535	-58.86	RMS	35.4	11.8	0.00	-37.10	-48.76	-27	-21.76	-	-	172	163	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector


RMS - RMS detection

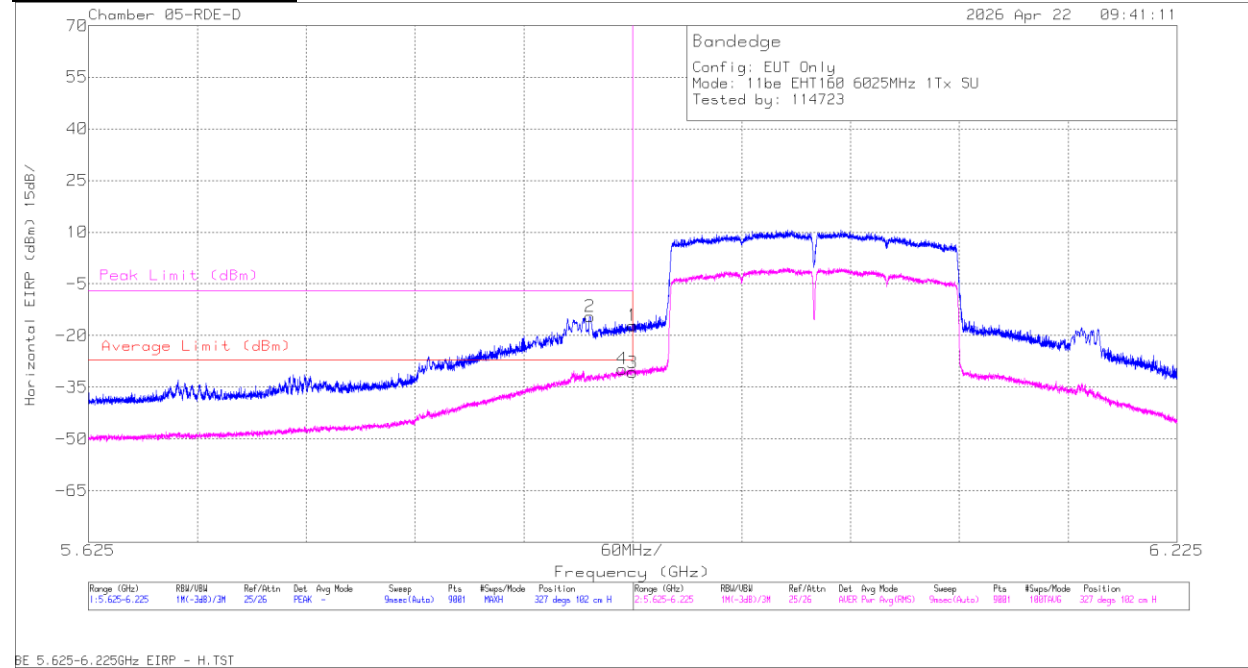WORST-CASE BANDEDGE (LOW CHANNEL)**802.11be EHT160 / 15 & 6025 / 1TX - ANT 16 / SISO / SU****HORIZONTAL/VERTICAL RESULT****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)
1	5.925000	-29.44	Pk	35.3	11.8	0.00	-34.74	-17.08	-	-	-7	-10.08	327	102
2	5.901335	-26.51	Pk	35.2	11.8	0.00	-34.91	-14.42	-	-	-7	-7.42	327	102
3	5.925000	-43.23	RMS	35.3	11.8	0.14	-34.74	-30.73	-27	-3.73	-	-	327	102
4	5.919268	-41.99	RMS	35.2	11.8	0.14	-34.77	-29.62	-27	-2.62	-	-	327	102

Pk - Peak detector

RMS - RMS detection

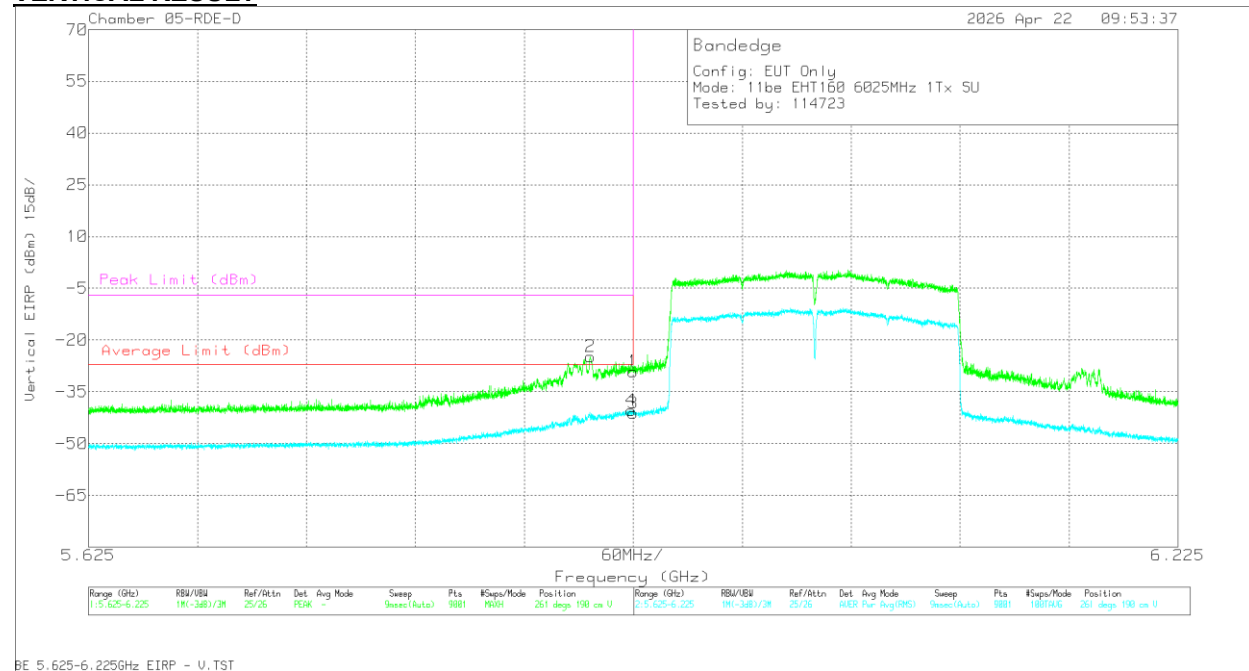VERTICAL RESULT

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)
1	5.925000	-41.47	Pk	35.3	11.8	0.00	-34.74	-29.11	-	-	-7	-22.11	261	190
2	5.901268	-36.89	Pk	35.2	11.8	0.00	-34.91	-24.80	-	-	-7	-17.80	261	190
3	5.925000	-53.73	RMS	35.3	11.8	0.14	-34.74	-41.23	-27	-14.23	-	-	261	190
4	5.923801	-52.97	RMS	35.3	11.8	0.14	-34.72	-40.45	-27	-13.45	-	-	261	190

Pk - Peak detector

RMS - RMS detection

1.1.5. 802.11be MIMO MODE IN UNII-5 BAND – SPURIOUS EMISSIONS

20MHz

UNII-5 (MIMO CDD)	Channel Frequency MHz	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cb/ Fitr/Pad (dB)	Correcte d Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (SU Mode)	5955	6+16	* 1.490482	43.99	ADR	28.0	0.00	-46.15	25.84	54	-28.16	-	-	267	370	V
			* 1.491340	34.11	ADR	28.0	0.00	-46.17	15.94	54	-38.06	-	-	267	370	H
			* 1.497530	55.24	PK-U	28.0	0.00	-46.10	37.14	-	-	74	-36.86	267	370	V
			* 1.499735	46.00	PK-U	28.0	0.00	-46.17	27.83	-	-	74	-46.17	267	370	H
			* 12.413128	54.47	PK-U	38.8	0.00	-40.79	52.48	-	-	74	-21.52	267	370	H
			* 12.437861	42.36	ADR	38.6	0.00	-40.40	40.56	54	-13.44	-	-	267	370	H
			* 12.438441	54.33	PK-U	38.6	0.00	-40.40	52.53	-	-	74	-21.47	267	370	V
			* 12.438641	42.20	ADR	38.6	0.00	-40.40	40.40	54	-13.6	-	-	267	370	V
			* 4.019311	55.81	PK-U	33.5	0.00	-45.60	43.71	-	-	74	-30.29	267	370	V
			* 4.019502	55.27	PK-U	33.5	0.00	-45.60	43.17	-	-	74	-30.83	267	370	H
			* 4.025772	43.31	ADR	33.5	0.00	-45.70	31.11	54	-22.89	-	-	267	370	H
			* 4.028284	43.76	ADR	33.5	0.00	-45.63	31.63	54	-22.37	-	-	267	370	V
			* 1.487493	46.23	ADR	28.0	0.00	-46.05	28.18	54	-25.82	-	-	78	391	H
			* 1.488013	57.94	PK-U	28.0	0.00	-46.10	39.84	-	-	74	-34.16	78	391	V
			* 1.489897	45.96	ADR	28.0	0.00	-46.10	27.86	54	-26.14	-	-	78	391	V
	6175		* 1.491373	58.43	PK-U	28.0	0.00	-46.16	40.27	-	-	74	-33.73	78	391	H
			* 12.376965	54.23	PK-U	38.7	0.00	-40.20	52.73	-	-	74	-21.27	78	391	V
			* 12.396131	42.15	ADR	38.8	0.00	-40.61	40.34	54	-13.66	-	-	78	391	H
			* 12.396927	42.08	ADR	38.8	0.00	-40.69	40.19	54	-13.81	-	-	78	391	V
			* 12.400231	53.70	PK-U	38.8	0.00	-40.58	51.92	-	-	74	-22.08	78	391	H
			* 2.794795	34.50	ADR	32.5	0.00	-47.18	19.82	54	-34.18	-	-	78	391	H
			* 2.802858	46.17	PK-U	32.5	0.00	-47.20	31.47	-	-	74	-42.53	78	391	V
			* 2.803418	34.59	ADR	32.5	0.00	-47.24	19.85	54	-34.15	-	-	78	391	V
			* 2.808021	46.41	PK-U	32.5	0.00	-47.20	31.71	-	-	74	-42.29	78	391	H
			* 4.307527	55.82	PK-U	33.7	0.00	-46.35	43.17	-	-	74	-30.83	360	204	H
			* 4.308531	44.03	ADR	33.7	0.00	-46.30	31.43	54	-22.57	-	-	360	204	H
			* 4.302450	56.29	PK-U	33.7	0.00	-46.60	43.39	-	-	74	-30.61	360	204	V
			* 4.300703	44.44	ADR	33.7	0.00	-46.60	31.54	54	-22.46	-	-	360	204	V
			* 12.293721	53.56	PK-U	38.8	0.00	-41.07	51.29	-	-	74	-22.71	360	204	H
			6415	* 12.304276	41.42	ADR	38.8	0.00	-41.23	38.99	54	-15.01	-	-	360	204
	* 12.274575	54.01		PK-U	38.9	0.00	-41.04	51.87	-	-	74	-22.13	360	204	V	
	* 12.305580	41.68		ADR	38.8	0.00	-41.24	39.24	54	-14.76	-	-	360	204	V	
	2.967306	57.20		PK-U	32.9	0.00	-46.50	43.60	-	-	88.2	-44.6	360	204	V	
	2.969538	57.40		PK-U	32.9	0.00	-46.45	43.85	-	-	88.2	-44.35	360	204	H	
	2.973567	45.41		ADR	32.9	0.00	-46.34	31.97	68.2	-36.23	-	-	360	204	V	
	2.973627	45.49		ADR	32.9	0.00	-46.34	32.05	68.2	-36.15	-	-	360	204	H	
	* 2.246661	61.81		PK-U	31.5	0.00	-50.20	43.11	-	-	74	-30.89	159	139	V	
	* 2.248033	61.84		PK-U	31.5	0.00	-50.29	43.05	-	-	74	-30.95	159	139	H	
	* 2.251509	49.62		ADR	31.5	0.00	-50.10	31.02	54	-22.98	-	-	159	139	V	
	* 2.252334	49.78		ADR	31.5	0.00	-50.00	31.28	54	-22.72	-	-	159	139	H	
	* 3.987452	58.79		PK-U	33.4	0.00	-47.95	44.24	-	-	74	-29.76	159	139	H	
	* 4.000592	59.41		PK-U	33.5	0.00	-47.90	45.01	-	-	74	-28.99	159	139	V	
	* 4.005201	47.28		ADR	33.5	0.00	-47.90	32.88	54	-21.12	-	-	159	139	H	
	11be (Partial RU Mode / Highest PSD)	5955 (26T)		* 4.00597	47.39	ADR	33.5	0.00	-47.90	32.99	54	-21.01	-	-	159	139
			* 15.969087	59.44	PK-U	40.7	0.00	-45.72	54.42	-	-	74	-19.58	159	139	V
* 15.998064			59.60	PK-U	40.8	0.00	-45.99	54.41	-	-	74	-19.59	159	139	H	
* 15.99835			47.62	ADR	40.8	0.00	-45.80	42.62	54	-11.38	-	-	159	139	H	
* 16.006399			47.76	ADR	40.8	0.00	-45.70	42.86	54	-11.14	-	-	159	139	V	
6175 (26T)			* 2.215868	61.31	PK-U	31.5	0.00	-50.04	42.77	-	-	74	-31.23	67	361	V
			* 2.229211	61.59	PK-U	31.5	0.00	-50.08	43.01	-	-	74	-30.99	67	361	H
			* 2.241640	49.82	ADR	31.5	0.00	-49.66	31.66	54	-22.34	-	-	67	361	H
			* 2.248971	49.81	ADR	31.5	0.00	-50.11	31.20	54	-22.8	-	-	67	361	V
			* 4.005017	47.12	ADR	33.5	0.00	-47.90	32.72	54	-21.28	-	-	67	361	V
			* 4.005547	47.26	ADR	33.5	0.00	-47.90	32.86	54	-21.14	-	-	67	361	H
			* 4.013149	58.44	PK-U	33.5	0.00	-47.83	44.11	-	-	74	-29.89	67	361	V
			* 4.015252	59.46	PK-U	33.5	0.00	-47.90	45.06	-	-	74	-28.94	67	361	H
			* 11.045260	58.69	PK-U	37.8	0.00	-45.23	51.26	-	-	74	-22.74	67	361	H
			* 11.066830	46.91	ADR	37.9	0.00	-44.87	39.94	54	-14.06	-	-	67	361	H
		11.067742	58.83	PK-U	37.9	0.00	-44.90	51.83	-	-	74	-22.17	67	361	V	
		* 11.068134	46.84	ADR	37.9	0.00	-44.89	39.85	54	-14.15	-	-	67	361	V	
6415 (26T)		* 2.241677	61.56	PK-U	31.5	0.00	-49.67	43.39	-	-	74	-30.61	240	114	H	
		* 2.251232	49.79	ADR	31.5	0.00	-50.10	31.19	54	-22.81	-	-	240	114	H	
		* 2.255025	49.87	ADR	31.5	0.00	-49.91	31.46	54	-22.54	-	-	240	114	V	
		* 2.260562	61.39	PK-U	31.5	0.00	-50.00	42.89	-	-	74	-31.11	240	114	V	
		* 4.225978	46.79	ADR	33.5	0.00	-48.10	32.19	54	-21.81	-	-	240	114	V	
		* 4.228094	46.81	ADR	33.5	0.00	-47.81	32.50	54	-21.5	-	-	240	114	H	
		* 4.230743	58.69	PK-U	33.5	0.00	-47.83	44.36	-	-	74	-29.64	240	114	H	
		* 4.240132	58.88	PK-U	33.5	0.00	-47.79	44.59	-	-	74	-29.41	240	114	V	
		* 11.100854	57.98	PK-U	37.9	0.00	-44.44	51.44	-	-	74	-22.56	240	114	H	
		* 11.102873	58.33	PK-U	37.9	0.00	-44.49	51.74	-	-	74	-22.26	240	114	V	
	* 11.106809	46.64	ADR	37.9	0.00	-44.34	40.20	54	-13.8	-	-	240	114	V		
	* 11.109713	46.59	ADR	37.9	0.00	-44.40	40.09	54	-13.91	-	-	240	114	H		

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

20MHz Cont.

UNII-5 (MIMO CDD)	Channel Frequency MHz	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cb/Flt r/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (RU Mode)	5955 (52+26T RU70)	6+16	* 4.640977	51.27	PK-U	34.2	0.00	-40.60	44.87	-	-	74	-29.13	0	200	H
			* 4.659633	39.46	ADR	34.2	0.00	-40.70	32.96	54	-21.04	-	-	0	200	H
			* 4.645941	51.94	PK-U	34.2	0.00	-40.60	45.54	-	-	74	-28.46	0	200	V
			* 4.655322	39.48	ADR	34.2	0.00	-40.70	32.98	54	-21.02	-	-	0	200	V
			2.621163	43.29	ADR	32.1	0.00	-43.80	31.59	68.2	-36.61	-	-	0	200	H
			2.622355	54.92	PK-U	32.1	0.00	-43.80	43.22	-	-	88.2	-44.98	0	200	V
			2.623283	43.11	ADR	32.1	0.00	-43.80	31.41	68.2	-36.79	-	-	0	200	V
			2.628691	54.73	PK-U	32.1	0.00	-43.70	43.13	-	-	88.2	-45.07	0	200	H
			13.570023	35.01	ADR	38.8	0.00	-34.40	39.41	68.2	-28.79	-	-	0	200	H
			13.575268	35.17	ADR	38.8	0.00	-34.50	39.47	68.2	-28.73	-	-	159	352	V
			13.581841	46.65	PK-U	38.8	0.00	-34.50	50.95	-	-	88.2	-37.25	159	352	V
			13.597247	46.60	PK-U	38.8	0.00	-34.60	50.80	-	-	88.2	-37.4	0	200	H
			* 1.31277	58.14	PK-U	29.0	0.00	-46.30	40.84	-	-	74	-33.16	0	101	V
			* 1.318498	46.68	ADR	29.0	0.00	-46.30	29.38	54	-24.62	-	-	0	200	H
			* 1.319533	58.26	PK-U	28.9	0.00	-46.30	40.86	-	-	74	-33.14	0	200	H
	* 1.324537		46.69	ADR	28.8	0.00	-46.30	29.19	54	-24.81	-	-	0	101	V	
	* 12.455181		46.30	PK-U	38.9	0.00	-34.50	50.70	-	-	74	-23.3	0	200	H	
	* 12.464545		34.25	ADR	38.9	0.00	-34.30	38.85	54	-15.15	-	-	0	200	V	
	* 12.466971		45.86	PK-U	38.9	0.00	-34.20	50.56	-	-	74	-23.44	0	200	V	
	* 12.470073		34.28	ADR	38.9	0.00	-34.30	38.88	54	-15.12	-	-	0	200	H	
	3.007863		41.90	ADR	32.7	0.00	-42.50	32.10	68.2	-36.1	-	-	0	200	V	
	3.013609		53.79	PK-U	32.8	0.00	-42.50	44.09	-	-	88.2	-44.11	0	200	V	
	3.015248		53.75	PK-U	32.8	0.00	-42.50	44.05	-	-	88.2	-44.15	0	200	H	
	3.015973		42.03	ADR	32.8	0.00	-42.50	32.33	68.2	-35.87	-	-	0	200	H	
	* 1.148863		58.07	PK-U	27.7	0.00	-46.70	39.07	-	-	74	-34.93	0	101	V	
	* 1.150489		46.77	ADR	27.7	0.00	-46.70	27.77	54	-26.23	-	-	0	101	V	
	* 1.151529		58.78	PK-U	27.7	0.00	-46.70	39.78	-	-	74	-34.22	0	101	H	
	* 1.153689		47.09	ADR	27.8	0.00	-46.70	28.19	54	-25.81	-	-	0	101	H	
	* 12.293587		33.96	ADR	38.9	0.00	-34.80	38.06	54	-15.94	-	-	0	101	H	
	* 12.300631		34.17	ADR	38.9	0.00	-34.80	38.27	54	-15.73	-	-	0	200	V	
	* 12.304861		45.49	PK-U	38.9	0.00	-34.70	49.69	-	-	74	-24.31	0	101	H	
	* 12.327241		46.51	PK-U	38.9	0.00	-34.50	50.91	-	-	74	-23.09	0	200	V	
	* 3.783496		52.57	PK-U	33.4	0.00	-41.80	44.17	-	-	74	-29.83	0	199	H	
	* 3.797694		40.58	ADR	33.5	0.00	-41.90	32.18	54	-21.82	-	-	0	199	H	
	* 3.803223		40.70	ADR	33.5	0.00	-41.80	32.40	54	-21.6	-	-	0	199	V	
	* 3.806289		52.33	PK-U	33.5	0.00	-41.80	44.03	-	-	74	-29.97	0	199	V	

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

40MHz

UNII-5 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cb/ Fltr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	5965	6+16	3.018593	56.99	PK-U	33	-46.34	0	43.65	-	-	88.2	-44.55	336	287	H
			2.990499	45.17	ADR	32.9	-46.6	0	31.47	68.2	-36.73	-	-	336	287	H
			3.01744	56.76	PK-U	33	-46.46	0	43.3	-	-	88.2	-44.9	354	111	V
			2.990176	45.45	ADR	32.9	-46.6	0	31.75	68.2	-36.45	-	-	354	111	V
			*11.876547	53.4	PK-U	38.9	-41.25	0	51.05	-	-	74	-22.95	196	128	H
			*11.900305	41.83	ADR	38.9	-41.57	0	39.16	54	-14.84	-	-	196	128	H
			*11.880574	53.37	PK-U	38.9	-41.46	0	50.81	-	-	74	-23.19	133	215	V
			*11.898712	41.79	ADR	38.9	-41.57	0	39.12	54	-14.88	-	-	133	215	V
			*17.825425	56.35	PK-U	41.5	-41.2	0	56.65	-	-	74	-17.35	63	137	H
			*17.817834	44.32	ADR	41.5	-41.38	0	44.44	54	-9.56	-	-	63	137	H
			*17.812826	55.73	PK-U	41.5	-41.18	0	56.05	-	-	74	-17.95	142	376	V
			*17.824485	44.13	ADR	41.5	-41.15	0	44.48	54	-9.52	-	-	142	376	V
			*3.338862	54.94	PK-U	32.8	-45.01	0	42.73	-	-	74	-31.27	181	198	H
			*3.334822	43.47	ADR	32.8	-45.02	0	31.25	54	-22.75	-	-	181	198	H
	3.340365		54.67	PK-U	32.8	-45	0	42.47	-	-	88.2	-45.73	49	112	V	
	*3.334686		43.08	ADR	32.8	-45.03	0	30.85	54	-23.15	-	-	49	112	V	
	*12.311931		54.01	PK-U	38.8	-41	0	51.81	-	-	74	-22.19	292	164	H	
	*12.286422		42.05	ADR	38.8	-40.9	0	39.95	54	-14.05	-	-	292	164	H	
	*12.301796		53.57	PK-U	38.8	-41.26	0	51.11	-	-	74	-22.89	318	166	V	
	*12.306468		41.69	ADR	38.8	-41.11	0	39.38	54	-14.62	-	-	318	166	V	
	*17.703765		55.46	PK-U	41.8	-41.28	0	55.98	-	-	74	-18.02	254	255	H	
	*17.882787		44	ADR	41.5	-42.02	0	43.48	54	-10.52	-	-	254	255	H	
	*17.833292		55.29	PK-U	41.5	-41.47	0	55.32	-	-	74	-18.68	68	346	V	
	*17.880207		44	ADR	41.5	-41.98	0	43.52	54	-10.48	-	-	68	346	V	
	*2.805206		58.58	PK-U	32.5	-47.3	0	43.78	-	-	74	-30.22	309	168	H	
	*2.806997		46.92	ADR	32.5	-47.2	0	32.22	54	-21.78	-	-	309	168	H	
	*2.806632		58.98	PK-U	32.5	-47.24	0	44.24	-	-	74	-29.76	285	224	V	
	*2.797224		47.05	ADR	32.4	-47.2	0	32.25	54	-21.75	-	-	285	224	V	
	12.875279		53.64	PK-U	38.8	-40.84	0	51.6	-	-	88.2	-36.6	127	265	H	
	12.869552		41.89	ADR	38.8	-40.94	0	39.75	68.2	-28.45	-	-	127	265	H	
	12.869		53.81	PK-U	38.8	-41	0	51.61	-	-	88.2	-36.59	251	280	V	
	12.86642		42.01	ADR	38.8	-41.04	0	39.77	68.2	-28.43	-	-	251	280	V	
	*17.828168		56.53	PK-U	41.5	-41.22	0	56.81	-	-	74	-17.19	337	369	H	
	*17.815257		44.63	ADR	41.5	-41.1	0	45.03	54	-8.97	-	-	337	369	H	
	*17.819581		55.9	PK-U	41.5	-41.2	0	56.2	-	-	74	-17.8	32	374	V	
	*17.823745		44.26	ADR	41.5	-41.13	0	44.63	54	-9.37	-	-	32	374	V	

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

80MHz

UNII-5 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity		
11be (SU Mode / Highest Power)	5985	6+16	2.956027	61.32	PK-U	32.8	-49.6	0	44.52	-	-	88.2	-43.68	360	101	H		
			2.953312	48.89	ADR	32.8	-49.41	0	32.28	68.2	-35.92	-	-	360	101	H		
			2.987935	60.79	PK-U	32.8	-49.37	0	44.22	-	-	88.2	-43.98	360	101	V		
			2.952588	48.93	ADR	32.8	-49.46	0	32.27	68.2	-35.93	-	-	360	101	V		
			* 11.893189	57.36	PK-U	38.7	-44.84	0	51.22	-	-	74	-22.78	360	199	H		
			* 11.878327	45.57	ADR	38.7	-45.1	0	39.17	54	-14.83	-	-	360	199	H		
			* 11.876315	56.98	PK-U	38.7	-44.8	0	50.88	-	-	74	-23.12	360	101	V		
			* 11.872599	45.43	ADR	38.7	-45.06	0	39.07	54	-14.93	-	-	360	101	V		
			* 17.852590	58.86	PK-U	41.2	-43.7	0	56.36	-	-	74	-17.64	360	101	H		
			* 17.851351	47.08	ADR	41.2	-43.57	0	44.71	54	-9.29	-	-	360	101	H		
			* 17.854498	59.41	PK-U	41.2	-43.8	0	56.81	-	-	74	-17.19	360	200	V		
			* 17.854466	47.04	ADR	41.2	-43.79	0	44.45	54	-9.55	-	-	360	200	V		
			3.070777	59.58	PK-U	33.1	-48.91	0	43.77	-	-	88.2	-44.43	0	101	H		
			3.064382	47.79	ADR	33.1	-48.78	0	32.11	68.2	-36.09	-	-	0	101	H		
			3.059356	59.8	PK-U	33.1	-48.86	0	44.04	-	-	88.2	-44.16	0	101	V		
			3.069853	47.88	ADR	33.1	-49.23	0	31.75	68.2	-36.45	-	-	0	101	V		
			* 12.191791	58.5	PK-U	39	-45.67	0	51.83	-	-	74	-22.17	0	198	H		
			* 12.190475	46.92	ADR	39	-45.36	0	40.56	54	-13.44	-	-	0	198	H		
			* 12.224208	58.69	PK-U	39	-45.04	0	52.65	-	-	74	-21.35	0	198	V		
			* 12.216077	46.63	ADR	39	-45.4	0	40.23	54	-13.77	-	-	0	198	V		
			17.622094	58.28	PK-U	41	-44.17	0	55.11	-	-	88.2	-33.09	0	101	H		
			17.618658	46.58	ADR	41	-43.97	0	43.61	68.2	-24.59	-	-	0	101	H		
			17.634086	58.31	PK-U	41	-44.37	0	54.94	-	-	88.2	-33.26	0	101	V		
			17.63475	46.71	ADR	41	-44.17	0	43.54	68.2	-24.66	-	-	0	101	V		
	3.190577		59.23	PK-U	33	-48.77	0	43.46	-	-	88.2	-44.74	360	101	H			
	3.191782		47.48	ADR	33	-48.83	0	31.65	68.2	-36.55	-	-	360	101	H			
	3.189807		59.11	PK-U	33	-48.98	0	43.13	-	-	88.2	-45.07	360	101	V			
	3.182523		47.48	ADR	33	-48.65	0	31.83	68.2	-36.37	-	-	360	101	V			
	* 12.693621		58.16	PK-U	39.1	-45.1	0	52.16	-	-	74	-21.84	360	101	H			
	* 12.697921		46.56	ADR	39.1	-44.72	0	40.94	54	-13.06	-	-	360	101	H			
	* 12.684558		58.59	PK-U	39.1	-45.22	0	52.47	-	-	74	-21.53	360	200	V			
	* 12.691709		46.44	ADR	39.1	-45.13	0	40.41	54	-13.59	-	-	360	200	V			
	17.501389		59.37	PK-U	41	-44.36	0	56.01	-	-	88.2	-32.19	360	101	H			
	17.499753		47.57	ADR	41	-44.4	0	44.17	68.2	-24.03	-	-	360	101	H			
	17.516024		59.45	PK-U	41	-44.21	0	56.24	-	-	88.2	-31.96	360	200	V			
	17.509092		47.56	ADR	41	-44.22	0	44.34	68.2	-23.86	-	-	360	200	V			
	11be (Partial RU Mode / Highest PSD)		EHT80 5985 (484+242 T RU91)	6+16	* 2.770200	48.8	ADR	32.4	-49.44	0	31.76	54	-22.24	-	-	0	101	H
					* 2.773386	61.49	PK-U	32.4	-49.42	0	44.47	-	-	74	-29.53	0	101	H
					* 2.775922	48.92	ADR	32.4	-49.4	0	31.92	54	-22.08	-	-	0	101	V
					* 2.780131	60.92	PK-U	32.4	-49.86	0	43.46	-	-	74	-30.54	0	101	V
					* 4.002140	47.17	ADR	33.5	-47.63	0	33.04	54	-20.96	-	-	0	101	H
					* 4.004622	47.39	ADR	33.5	-47.82	0	33.07	54	-20.93	-	-	0	101	V
					* 4.004924	58.91	PK-U	33.5	-47.88	0	44.53	-	-	74	-29.47	0	101	V
					* 4.005616	58.49	PK-U	33.5	-47.9	0	44.09	-	-	74	-29.91	0	101	H
					* 11.089662	46.56	ADR	37.9	-44.2	0	40.26	54	-13.74	-	-	0	101	H
					* 11.094526	46.68	ADR	37.9	-44.2	0	40.38	54	-13.62	-	-	0	101	V
					* 11.112192	58.35	PK-U	37.9	-44.84	0	51.41	-	-	74	-22.59	0	101	H
					* 11.115232	58.27	PK-U	37.9	-44.8	0	51.37	-	-	74	-22.63	0	101	V
* 12.295926		56.47			PK-U	38.9	-44.28	0	51.09	-	-	74	-22.91	3	372	H		
* 12.284369		44.48			ADR	38.9	-44.2	0	39.18	54	-14.82	-	-	3	372	H		
* 12.289925		55.64			PK-U	38.9	-44.19	0	50.35	-	-	74	-23.65	59	314	V		
* 12.303109		44.35			ADR	38.9	-44.19	0	39.06	54	-14.94	-	-	59	314	V		
2.036816		43.46			PK-U	31.6	-26.92	0	48.14	-	-	88.2	-40.06	358	282	H		
2.055922		43.99			PK-U	31.6	-26.88	0	48.71	-	-	88.2	-39.49	110	359	V		
2.06099		31.7			ADR	31.6	-26.96	0	36.34	68.2	-31.86	-	-	110	359	V		
2.064963		31.78			ADR	31.6	-26.9	0	36.48	68.2	-31.72	-	-	358	282	H		
3.065505		31.15			ADR	32.9	-25.51	0	38.54	68.2	-29.66	-	-	167	346	H		
3.067528		31.03			ADR	32.9	-25.52	0	38.41	68.2	-29.79	-	-	212	176	V		
3.071124		43.15			PK-U	33	-25.47	0	50.68	-	-	88.2	-37.52	167	346	H		
3.072328		42.64			PK-U	33	-25.47	0	50.17	-	-	88.2	-38.03	212	176	V		
EHT80 6385 (484+242 T RU92)		2.112935	43.28		PK-U	31.5	-26.75	0	48.03	-	-	88.2	-40.17	286	284	H		
		2.118187	42.97		PK-U	31.5	-26.77	0	47.7	-	-	88.2	-40.5	130	292	V		
		2.120765	31.32		ADR	31.5	-26.78	0	36.04	68.2	-32.16	-	-	286	284	H		
		2.138974	31.31		ADR	31.5	-26.74	0	36.07	68.2	-32.13	-	-	130	292	V		
		3.178377	31.15		ADR	33	-25.39	0	38.76	68.2	-29.44	-	-	6	205	V		
		3.186782	31.2		ADR	33	-25.43	0	38.77	68.2	-29.43	-	-	5	293	H		
		3.193007	42.86		PK-U	33	-25.34	0	50.52	-	-	88.2	-37.68	6	205	V		
		3.204669	42.98		PK-U	33	-25.45	0	50.53	-	-	88.2	-37.67	5	293	H		
		12.755211	56.17		PK-U	39	-43.76	0	51.41	-	-	88.2	-36.79	276	392	V		
		12.779296	44.49		ADR	39	-43.87	0	39.62	68.2	-28.58	-	-	276	392	V		
		12.782282	44.48		ADR	39	-43.91	0	39.57	68.2	-28.63	-	-	35	376	H		
		12.790023	56.09		PK-U	39	-43.88	0	51.21	-	-	88.2	-36.99	35	376	H		

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

160MHz

UNII-5 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity			
11be (SU Mode / Highest Power)	6025	6+16	* 2.224889	61.97	PK-U	31.5	-50.01	0.00	43.46	-	-	74	-30.54	280	115	V			
			* 2.229005	49.65	ADR	31.5	-50.10	0.00	31.05	54	-22.95	-	-	280	115	H			
			* 2.236066	61.35	PK-U	31.5	-50.49	0.00	42.36	-	-	74	-31.64	280	115	H			
			* 2.247776	49.55	ADR	31.5	-50.30	0.00	30.75	54	-23.25	-	-	280	115	V			
			* 3.801614	46.89	ADR	33.4	-48.25	0.00	32.04	54	-21.96	-	-	280	115	V			
			* 3.803450	58.91	PK-U	33.4	-47.90	0.00	44.41	-	-	74	-29.59	280	115	V			
			* 3.826683	58.64	PK-U	33.4	-47.88	0.00	44.16	-	-	74	-29.84	280	115	H			
			* 3.830647	46.83	ADR	33.4	-47.86	0.00	32.37	54	-21.63	-	-	280	115	H			
			* 11.077039	58.34	PK-U	37.9	-44.31	0.00	51.93	-	-	74	-22.07	280	115	H			
			* 11.077467	46.76	ADR	37.9	-44.44	0.00	40.22	54	-13.78	-	-	280	115	V			
	* 11.083626		46.79	ADR	37.9	-44.27	0.00	40.42	54	-13.58	-	-	280	115	H				
	* 11.085662		58.32	PK-U	37.9	-44.47	0.00	51.75	-	-	74	-22.25	280	115	V				
	* 2.203746		49.69	ADR	31.4	-50.23	0.00	30.86	54	-23.14	-	-	69	208	H				
	* 2.233605		49.79	ADR	31.5	-49.94	0.00	31.35	54	-22.65	-	-	69	208	V				
	* 2.242960		61.71	PK-U	31.5	-49.89	0.00	43.32	-	-	74	-30.68	69	208	H				
	* 2.244181		62.10	PK-U	31.5	-49.82	0.00	43.78	-	-	74	-30.22	69	208	V				
	* 4.046753		58.11	PK-U	33.5	-47.85	0.00	43.76	-	-	74	-30.24	69	208	H				
	* 4.047304		46.91	ADR	33.5	-47.87	0.00	32.54	54	-21.46	-	-	69	208	H				
	* 4.053726		58.69	PK-U	33.4	-47.55	0.00	44.54	-	-	74	-29.46	69	208	V				
	* 4.058872		46.63	ADR	33.4	-47.90	0.00	32.13	54	-21.87	-	-	69	208	V				
	* 11.073903	46.66	ADR	37.9	-45.07	0.00	39.49	54	-14.51	-	-	69	208	V					
	* 11.087214	58.59	PK-U	37.9	-44.54	0.00	51.95	-	-	74	-22.05	69	208	H					
	* 11.087414	46.74	ADR	37.9	-44.48	0.00	40.16	54	-13.84	-	-	69	208	H					
	* 11.088750	58.87	PK-U	37.9	-44.37	0.00	52.40	-	-	74	-21.6	69	208	V					
	6345	* 2.234225	61.31	PK-U	31.5	-50.03	0.00	42.78	-	-	74	-31.22	0	101	H				
		* 2.243726	49.70	ADR	31.5	-49.83	0.00	31.37	54	-22.63	-	-	0	101	H				
		* 2.248521	49.76	ADR	31.5	-50.20	0.00	31.06	54	-22.94	-	-	0	101	V				
		* 2.257863	61.20	PK-U	31.5	-50.01	0.00	42.69	-	-	74	-31.31	0	101	V				
		* 4.005708	58.93	PK-U	33.5	-47.90	0.00	44.53	-	-	74	-29.47	0	101	H				
		* 4.006441	47.22	ADR	33.5	-47.81	0.00	32.91	54	-21.09	-	-	0	101	V				
		* 4.007059	58.98	PK-U	33.5	-47.72	0.00	44.76	-	-	74	-29.24	0	101	V				
		* 4.007388	47.11	ADR	33.5	-47.85	0.00	32.76	54	-21.24	-	-	0	101	H				
		* 11.056116	58.42	PK-U	37.8	-45.01	0.00	51.21	-	-	74	-22.79	0	101	V				
		* 11.064591	58.52	PK-U	37.9	-44.68	0.00	51.74	-	-	74	-22.26	0	101	H				
	EHT160 (996+484T RU95)	6025		* 11.073790	47.00	ADR	37.9	-45.04	0.00	39.86	54	-14.14	-	-	0	101	H		
				* 11.085921	46.85	ADR	37.9	-44.42	0.00	40.33	54	-13.67	-	-	0	101	V		
				* 1.287201	31.3	ADR	29.3	-27.57	0.00	33.03	68.2	-35.17	-	-	360	201	V		
				* 1.30836	43.5	PK-U	29.3	-27.50	0.00	45.3	-	-	74	-28.7	360	100	H		
				* 1.309333	43.27	PK-U	29.3	-27.52	0.00	45.05	-	-	74	-28.95	360	201	V		
				* 1.315939	31.38	ADR	29.2	-27.53	0.00	33.05	54	-20.95	-	-	360	100	H		
* 11.732258				56.09	PK-U	38.6	-44.70	0.00	49.99	-	-	74	-24.01	360	100	V			
* 11.733339				44.38	ADR	38.6	-44.70	0.00	38.28	54	-15.72	-	-	360	100	V			
* 11.749412				56.13	PK-U	38.6	-44.54	0.00	50.19	-	-	74	-23.81	360	100	H			
* 11.754244				44.28	ADR	38.6	-44.55	0.00	38.33	54	-15.67	-	-	360	100	H			
* 3.94355				42.67	PK-U	33.9	-25.26	0.00	51.31	-	-	74	-22.69	360	200	V			
* 3.948355				42.9	PK-U	33.9	-25.31	0.00	51.49	-	-	74	-22.51	360	100	H			
* 3.966182				31.04	ADR	33.9	-25.34	0.00	39.6	54	-14.4	-	-	360	200	V			
* 3.974756				31.33	ADR	33.9	-25.27	0.00	39.96	54	-14.04	-	-	360	100	H			
EHT160 (996+484T RU95)				6185		* 12.401866	56.34	PK-U	38.8	-43.54	0.00	51.6	-	-	74	-22.4	0	100	H
	* 12.392009	44.58	ADR			38.8	-43.83	0.00	39.55	54	-14.45	-	-	0	100	H			
	* 12.374354	56.68	PK-U			38.8	-44.25	0.00	51.23	-	-	74	-22.77	0	201	V			
	* 12.380123	44.31	ADR			38.8	-44.07	0.00	39.04	54	-14.96	-	-	0	201	V			
	2.053295	42.86	PK-U			31.6	-26.9	0.00	47.56	-	-	88.2	-40.64	0	100	V			
	2.075248	31.48	ADR			31.6	-26.99	0.00	36.09	68.2	-32.11	-	-	0	100	H			
	2.079359	42.56	PK-U			31.5	-26.99	0.00	47.07	-	-	88.2	-41.13	0	100	H			
	2.08143	31.12	ADR			31.5	-26.94	0.00	35.68	68.2	-32.52	-	-	0	100	V			
	3.088355	42.59	PK-U			33	-25.5	0.00	50.09	-	-	88.2	-38.11	0	100	H			
	3.104031	31.17	ADR			33	-25.5	0.00	38.67	68.2	-29.53	-	-	0	100	V			
	3.105753	42.98	PK-U			33	-25.48	0.00	50.5	-	-	88.2	-37.7	0	100	V			
	3.109959	31.15	ADR			33	-25.53	0.00	38.62	68.2	-29.58	-	-	0	100	H			
	EHT160 (996+484T RU94)	6345				* 12.688543	55.50	PK-U	39.0	-43.95	0.00	50.55	-	-	74	-23.45	360	100	H
						* 12.692843	44.12	ADR	39.0	-44.05	0.00	39.07	54	-14.93	-	-	360	100	H
						* 12.686523	55.99	PK-U	38.9	-43.94	0.00	50.95	-	-	74	-23.05	360	100	V
* 12.697084				44.08	ADR	39.0	-44.12	0.00	38.96	54	-15.04	-	-	360	100	V			
2.097496				31.36	ADR	31.5	-26.80	0.00	36.06	68.2	-32.14	-	-	360	100	H			
2.103641				31.25	ADR	31.5	-26.87	0.00	35.88	68.2	-32.32	-	-	360	201	V			
2.132413				43.01	PK-U	31.5	-26.73	0.00	47.78	-	-	88.2	-40.42	360	100	H			
2.134696				43.75	PK-U	31.5	-26.78	0.00	48.47	-	-	88.2	-39.73	360	201	V			
3.160812				42.78	PK-U	33.0	-25.55	0.00	50.23	-	-	88.2	-37.97	360	100	H			
3.171597				31.17	ADR	33.0	-25.55	0.00	38.62	68.2	-29.58	-	-	360	200	V			
3.178302				42.70	PK-U	33.0	-25.43	0.00	50.27	-	-	88.2	-37.93	360	200	V			
3.181451				31.14	ADR	33.0	-25.45	0.00	38.69	68.2	-29.51	-	-	360	100	H			



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

WORST-CASE HARMONICS AND SPURIOUS EMISSIONS

802.11be EHT40 / 6405MHz / 2TX CDD / SU:

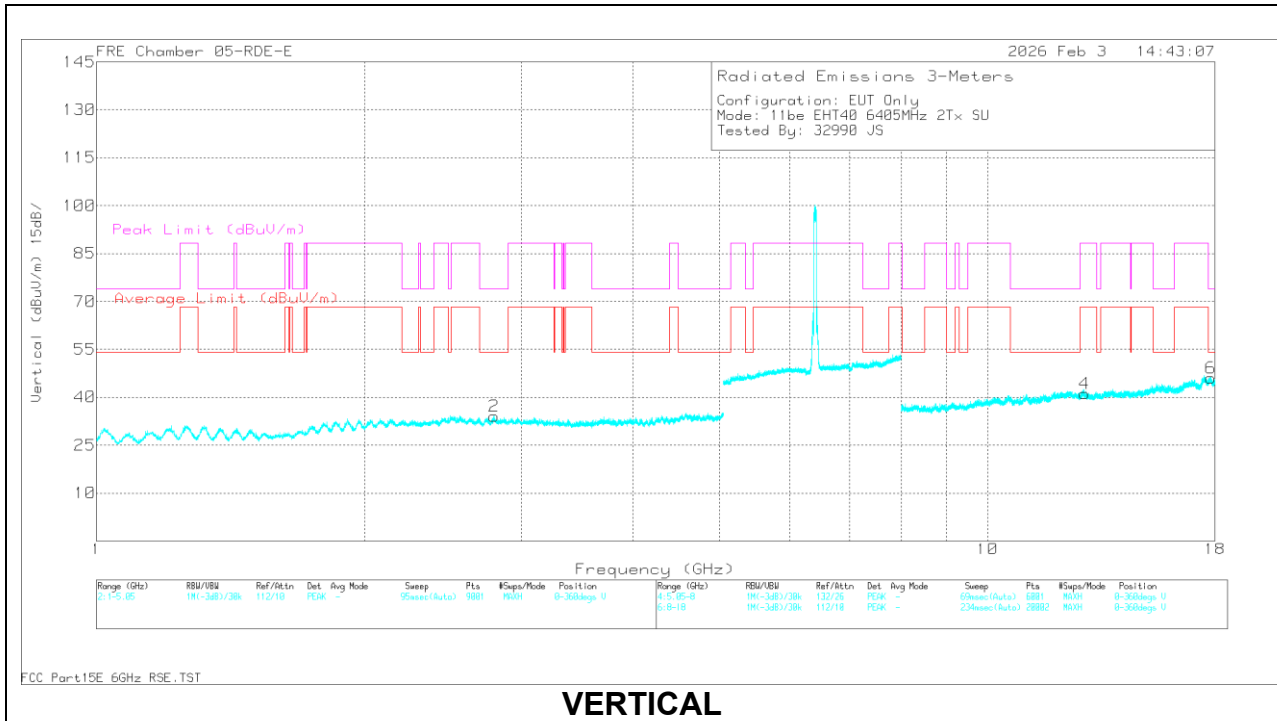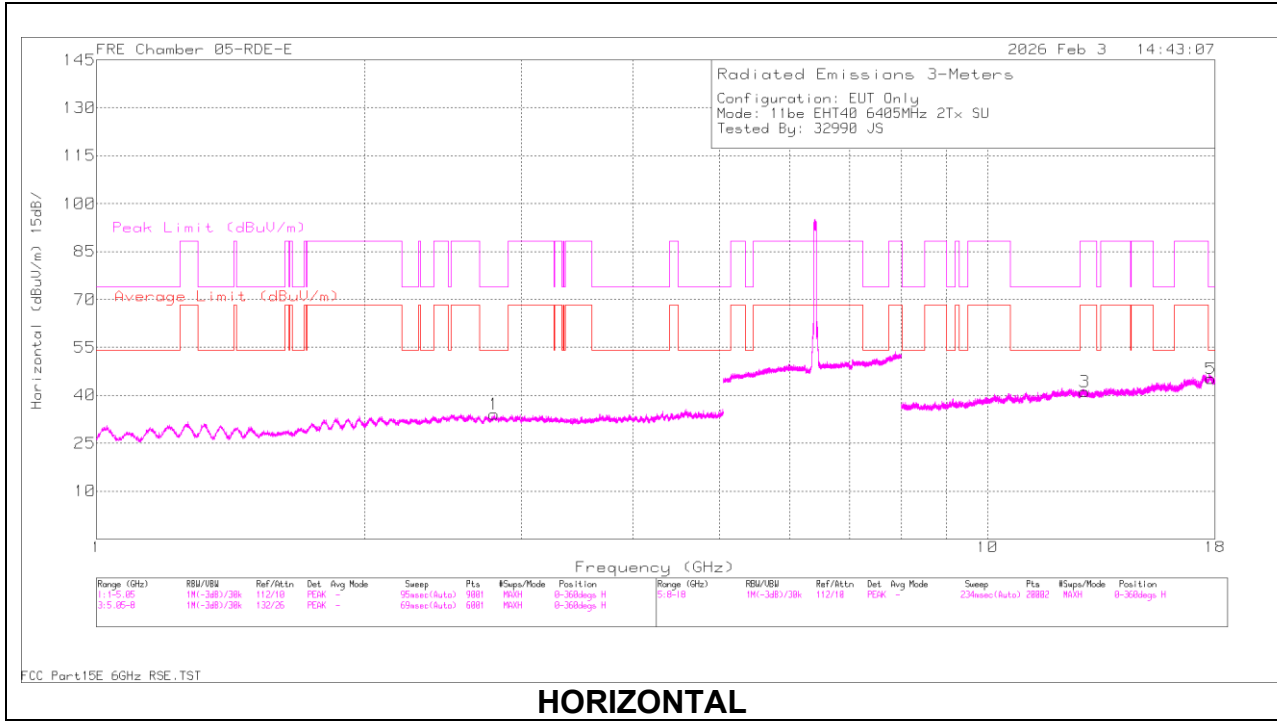

RADIATED EMISSIONS

Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbt/ Fltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 2.805206	58.58	PK-U	32.5	0.00	-47.30	43.78	-	-	74	-30.22	309	168	H
* 2.806997	46.92	ADR	32.5	0.00	-47.20	32.22	54	-21.78	-	-	309	168	H
* 2.806632	58.98	PK-U	32.5	0.00	-47.24	44.24	-	-	74	-29.76	285	224	V
* 2.797224	47.05	ADR	32.4	0.00	-47.20	32.25	54	-21.75	-	-	285	224	V
12.875279	53.64	PK-U	38.8	0.00	-40.84	51.60	-	-	88.2	-36.6	127	265	H
12.869552	41.89	ADR	38.8	0.00	-40.94	39.75	68.2	-28.45	-	-	127	265	H
12.869000	53.81	PK-U	38.8	0.00	-41.00	51.61	-	-	88.2	-36.59	251	280	V
12.866420	42.01	ADR	38.8	0.00	-41.04	39.77	68.2	-28.43	-	-	251	280	V
* 17.828168	56.53	PK-U	41.5	0.00	-41.22	56.81	-	-	74	-17.19	337	369	H
* 17.815257	44.63	ADR	41.5	0.00	-41.10	45.03	54	-8.97	-	-	337	369	H
* 17.819581	55.90	PK-U	41.5	0.00	-41.20	56.20	-	-	74	-17.8	32	374	V
* 17.823745	44.26	ADR	41.5	0.00	-41.13	44.63	54	-9.37	-	-	32	374	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.1.6. 802.11be MIMO MODE IN UNII-6 BAND – SPURIOUS EMISSIONS**20MHz**

UNII-6 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cb/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity		
11be (SU Mode / Highest Power)	6435	6 + 16	* 12.384373	41.9	ADR	38.8	-40.3	0.00	40.4	54	-13.6	-	-	360	101	V		
			* 12.389636	53.94	PK-U	38.8	-40.5	0.00	52.24	-	-	74	-21.76	360	101	H		
			* 12.395604	41.91	ADR	38.8	-40.68	0.00	40.03	54	-13.97	-	-	360	101	H		
			* 12.397095	53.93	PK-U	38.8	-40.7	0.00	52.03	-	-	74	-21.97	360	101	V		
			* 2.780406	58.6	PK-U	32.4	-47.1	0.00	43.9	-	-	74	-30.1	360	101	H		
			* 2.788791	58.2	PK-U	32.5	-47.1	0.00	43.6	-	-	74	-30.4	360	101	V		
			* 2.793128	46.71	ADR	32.5	-47.1	0.00	32.11	54	-21.89	-	-	360	101	V		
			* 2.799826	46.74	ADR	32.4	-47.2	0.00	31.94	54	-22.06	-	-	360	101	H		
			* 4.312238	45.01	ADR	33.7	-46.3	0.00	32.41	54	-21.59	-	-	360	101	H		
			* 4.314717	39.2	ADR	33.7	-46.3	0.00	26.6	54	-27.4	-	-	360	101	V		
			* 4.316650	50.44	PK-U	33.7	-46.3	0.00	37.84	-	-	74	-36.16	360	101	V		
			* 4.321468	56.27	PK-U	33.7	-46.3	0.00	43.67	-	-	74	-30.33	360	101	H		
	6475		1.99932	61.58	PK-U	32.1	-49.8	0.00	43.88	-	-	88.2	-44.32	293	332	H		
			1.993521	49.96	ADR	32	-49.81	0.00	32.15	68.2	-36.05	-	-	293	332	H		
			3.147086	58.24	PK-U	33.5	-47.87	0.00	43.87	-	-	88.2	-44.33	9	345	H		
			3.123231	46.58	ADR	33.2	-48.13	0.00	31.65	68.2	-36.55	-	-	9	345	H		
			2.002553	61.78	PK-U	32.1	-49.77	0.00	44.11	-	-	88.2	-44.09	88	242	V		
			1.992834	50.01	ADR	32	-49.81	0.00	32.2	68.2	-36	-	-	88	242	V		
			3.131535	57.92	PK-U	33.4	-48.08	0.00	43.24	-	-	88.2	-44.96	322	169	V		
			3.14848	46.36	ADR	33.5	-47.84	0.00	32.02	68.2	-36.18	-	-	322	169	V		
			13.690836	55.23	PK-U	39	-43.97	0.00	50.26	-	-	88.2	-37.94	328	349	H		
			13.691192	42.85	ADR	39	-43.96	0.00	37.89	68.2	-30.31	-	-	328	349	H		
			13.68918	54.98	PK-U	39	-43.97	0.00	50.01	-	-	88.2	-38.19	156	262	V		
			13.714186	43	ADR	39	-43.88	0.00	38.12	68.2	-30.08	-	-	156	262	V		
	6515		1.999532	61.78	PK-U	32.1	-49.8	0.00	44.08	-	-	88.2	-44.12	19	255	H		
			1.995515	49.86	ADR	32	-49.82	0.00	32.04	68.2	-36.16	-	-	19	255	H		
			3.16053	57.86	PK-U	33.5	-47.87	0.00	43.49	-	-	88.2	-44.71	301	373	H		
			3.163219	46.25	ADR	33.4	-47.87	0.00	31.78	68.2	-36.42	-	-	301	373	H		
			1.999897	61.54	PK-U	32.1	-49.8	0.00	43.84	-	-	88.2	-44.36	38	169	V		
			2.001399	50.02	ADR	32.1	-49.78	0.00	32.34	68.2	-35.86	-	-	38	169	V		
			3.170431	58	PK-U	33.4	-47.94	0.00	43.46	-	-	88.2	-44.74	94	318	V		
			3.149696	46.37	ADR	33.5	-47.81	0.00	32.06	68.2	-36.14	-	-	94	318	V		
			13.911513	54.94	PK-U	39	-43.98	0.00	49.96	-	-	88.2	-38.24	266	224	H		
			13.916681	43.52	ADR	39.1	-43.99	0.00	38.63	68.2	-29.57	-	-	266	224	H		
			13.905284	55.56	PK-U	39	-44.02	0.00	50.54	-	-	88.2	-37.66	85	242	V		
			13.900012	43.6	ADR	39.1	-43.91	0.00	38.79	68.2	-29.41	-	-	85	242	V		
			EHT20 (26T RU0)	6435	* 2.218285	61.26	PK-U	31.5	-50.00	0.00	42.76	-	-	74	-31.24	360	108	V
					* 2.240783	49.88	ADR	31.5	-49.71	0.00	31.67	54	-22.33	-	-	360	108	H
	* 2.248293				61.32	PK-U	31.5	-50.24	0.00	42.58	-	-	74	-31.42	360	108	H	
	* 2.251459				49.89	ADR	31.5	-50.10	0.00	31.29	54	-22.71	-	-	360	108	V	
	* 3.996503				47.49	ADR	33.5	-48.15	0.00	32.84	54	-21.16	-	-	360	108	H	
	* 4.003488				47.57	ADR	33.5	-47.75	0.00	33.32	54	-20.68	-	-	360	108	V	
	* 4.005089				59.42	PK-U	33.5	-47.90	0.00	45.02	-	-	74	-28.98	360	108	H	
	* 4.011576				58.86	PK-U	33.5	-48.00	0.00	44.36	-	-	74	-29.64	360	108	V	
	* 11.127369				46.33	ADR	37.9	-44.70	0.00	39.53	54	-14.47	-	-	360	108	V	
	* 11.150054				46.54	ADR	37.9	-44.93	0.00	39.51	54	-14.49	-	-	360	108	H	
	* 11.161649				58.58	PK-U	37.9	-45.46	0.00	51.02	-	-	74	-22.98	360	108	H	
	* 11.164277				57.87	PK-U	37.9	-45.36	0.00	50.41	-	-	74	-23.59	360	108	V	
EHT20 (26T RU4)	6475	6+16	* 2.235493	49.67	ADR	31.5	-50.14	0.00	31.03	54	-22.97	-	-	360	100	H		
			* 2.245936	61.60	PK-U	31.5	-49.99	0.00	43.11	-	-	74	-30.89	360	100	H		
			* 2.247956	61.24	PK-U	31.5	-50.30	0.00	42.44	-	-	74	-31.56	360	100	V		
			* 2.252124	49.74	ADR	31.5	-50.06	0.00	31.18	54	-22.82	-	-	360	100	V		
			* 4.000278	47.30	ADR	33.5	-47.90	0.00	32.90	54	-21.1	-	-	360	100	H		
			* 4.000911	59.27	PK-U	33.5	-47.90	0.00	44.87	-	-	74	-29.13	360	100	V		
			* 4.008455	58.67	PK-U	33.5	-48.05	0.00	44.12	-	-	74	-29.88	360	100	H		
			* 4.009599	47.39	ADR	33.5	-48.00	0.00	32.89	54	-21.11	-	-	360	100	V		
			* 11.095090	46.71	ADR	37.9	-44.19	0.00	40.42	54	-13.58	-	-	360	100	H		
			* 11.103877	46.73	ADR	37.9	-44.41	0.00	40.22	54	-13.78	-	-	360	100	V		
			* 11.106325	58.43	PK-U	37.9	-44.44	0.00	51.89	-	-	74	-22.11	360	100	H		
			* 11.110664	58.41	PK-U	37.9	-44.60	0.00	51.71	-	-	74	-22.29	360	100	V		
EHT20 (26T RU8)	6515		* 2.773310	60.63	PK-U	32.4	-49.44	0.00	43.59	-	-	74	-30.41	0	101	H		
			* 2.776007	49.15	ADR	32.4	-49.40	0.00	32.15	54	-21.85	-	-	0	101	H		
			* 2.776295	60.69	PK-U	32.4	-49.40	0.00	43.69	-	-	74	-30.31	0	101	V		
			* 2.779112	48.97	ADR	32.4	-49.28	0.00	32.09	54	-21.91	-	-	0	101	V		
			* 3.990696	58.79	PK-U	33.4	-47.83	0.00	44.36	-	-	74	-29.64	0	101	H		
			* 3.999955	47.22	ADR	33.5	-47.89	0.00	32.83	54	-21.17	-	-	0	101	V		
			* 4.001163	58.75	PK-U	33.5	-47.85	0.00	44.40	-	-	74	-29.6	0	101	V		
			* 4.007717	47.29	ADR	33.5	-47.99	0.00	32.80	54	-21.2	-	-	0	101	H		
			* 11.098642	46.72	ADR	37.9	-44.40	0.00	40.22	54	-13.78	-	-	0	101	H		
			* 11.102037	58.43	PK-U	37.9	-44.40	0.00	51.93	-	-	74	-22.07	0	101	V		
			* 11.113100	46.59	ADR	37.9	-44.59	0.00	39.90	54	-14.1	-	-	0	101	V		
			* 11.114672	58.79	PK-U	37.9	-44.70	0.00	51.99	-	-	74	-22.01	0	101	H		

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

20MHz Cont.

UNI-5 (MIMO CDD)	Channel Frequency MHz	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbt/FI tr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (RU Mode)	6435 (52+26T RU70)	6+16	* 1.368192	57.98	PK-U	28.6	0.00	-46.20	40.38	-	-	74	-33.62	0	200	H
			* 1.37248	46.56	ADR	28.5	0.00	-46.20	28.86	54	-25.14	-	-	0	200	H
			* 1.375342	46.60	ADR	28.6	0.00	-46.20	29.00	54	-25	-	-	0	101	V
			* 1.376351	57.92	PK-U	28.6	0.00	-46.20	40.32	-	-	74	-33.68	0	101	V
			* 3.799751	52.24	PK-U	33.5	0.00	-41.90	43.84	-	-	74	-30.16	0	200	H
			* 3.804892	40.65	ADR	33.5	0.00	-41.80	32.35	54	-21.65	-	-	0	200	H
			* 3.809714	40.71	ADR	33.5	0.00	-41.80	32.41	54	-21.59	-	-	0	101	V
			* 3.815326	52.30	PK-U	33.5	0.00	-41.80	44.00	-	-	74	-30	0	101	V
			12.85033	45.08	PK-U	39.3	0.00	-34.30	50.08	-	-	88.2	-38.12	0	200	V
			12.86455	33.36	ADR	39.3	0.00	-34.40	38.26	68.2	-29.94	-	-	0	200	V
			12.883363	45.22	PK-U	39.2	0.00	-34.40	50.02	-	-	88.2	-38.18	0	101	H
			12.901076	33.21	ADR	39.3	0.00	-34.40	38.11	68.2	-30.09	-	-	0	101	H
	6475 (52+26T RU71)		* 1.316165	46.61	ADR	29.0	0.00	-46.30	29.31	54	-24.69	-	-	360	101	V
			* 1.319307	47.08	ADR	29.0	0.00	-46.30	29.78	54	-24.22	-	-	360	101	H
			* 1.32052	58.26	PK-U	28.9	0.00	-46.30	40.86	-	-	74	-33.14	360	101	H
			* 1.325399	58.39	PK-U	28.8	0.00	-46.30	40.89	-	-	74	-33.11	360	101	V
			* 3.840697	51.86	PK-U	33.4	0.00	-41.80	43.46	-	-	74	-30.54	360	101	V
			* 3.846203	40.21	ADR	33.4	0.00	-41.70	31.91	54	-22.09	-	-	360	101	V
			* 3.850212	51.95	PK-U	33.4	0.00	-41.70	43.65	-	-	74	-30.35	360	101	H
			* 3.853318	40.25	ADR	33.4	0.00	-41.70	31.95	54	-22.05	-	-	360	101	H
			12.953229	33.54	ADR	39.2	0.00	-33.80	38.94	68.2	-29.26	-	-	360	200	H
			12.9583	45.39	PK-U	39.2	0.00	-33.80	50.79	-	-	88.2	-37.41	360	200	V
			12.959055	45.29	PK-U	39.2	0.00	-33.80	50.69	-	-	88.2	-37.51	360	200	H
			12.965091	33.85	ADR	39.2	0.00	-33.90	39.15	68.2	-29.05	-	-	360	200	V
	6515 (52+26T RU72)		* 1.479155	45.66	ADR	28.4	0.00	-45.90	28.16	54	-25.84	-	-	360	101	V
			* 1.482595	57.56	PK-U	28.4	0.00	-45.90	40.06	-	-	74	-33.94	360	101	V
			* 1.48295	57.55	PK-U	28.4	0.00	-45.90	40.05	-	-	74	-33.95	360	101	H
			* 1.48599	45.81	ADR	28.4	0.00	-45.90	28.31	54	-25.69	-	-	360	101	H
			* 3.796204	52.77	PK-U	33.4	0.00	-41.90	44.27	-	-	74	-29.73	360	200	V
			* 3.798328	40.94	ADR	33.5	0.00	-41.90	32.54	54	-21.46	-	-	360	200	V
			* 3.804594	40.78	ADR	33.5	0.00	-41.80	32.48	54	-21.52	-	-	360	200	H
			* 3.80471	52.36	PK-U	33.5	0.00	-41.80	44.06	-	-	74	-29.94	360	200	H
			12.845947	45.57	PK-U	39.3	0.00	-34.20	50.67	-	-	88.2	-37.53	360	200	V
			12.84968	33.36	ADR	39.3	0.00	-34.30	38.36	68.2	-29.84	-	-	360	200	V
			13.164373	47.08	PK-U	39.0	0.00	-34.40	51.68	-	-	88.2	-36.52	360	200	H
			13.165373	35.35	ADR	39.0	0.00	-34.40	39.95	68.2	-28.25	-	-	360	200	H

40MHz

UNII-6 (MIMO CDD)	Channel Frequency MHz	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbt/FI tr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT40 (SU Mode)	6445	6+16	3.202536	55.68	PK-U	32.9	0.00	-45.40	43.18	-	-	88.2	-45.02	133	239	H
			3.205144	44.04	ADR	32.9	0.00	-45.40	31.54	68.2	-36.66	-	-	133	239	H
			3.197523	55.71	PK-U	32.9	0.00	-45.45	43.16	-	-	88.2	-45.04	100	140	V
			3.215472	44.15	ADR	33.0	0.00	-45.40	31.75	68.2	-36.45	-	-	100	140	V
			12.839439	53.60	PK-U	38.8	0.00	-41.10	51.30	-	-	88.2	-36.9	20	348	H
			12.850865	41.92	ADR	38.9	0.00	-41.21	39.61	68.2	-28.59	-	-	20	348	H
			12.854205	53.65	PK-U	38.9	0.00	-41.20	51.35	-	-	88.2	-36.85	61	159	V
			12.869424	41.80	ADR	38.8	0.00	-40.96	39.64	68.2	-28.56	-	-	61	159	V
			* 17.777375	55.51	PK-U	41.6	0.00	-40.84	56.27	-	-	74	-17.73	92	290	H
			* 17.774720	43.86	ADR	41.6	0.00	-40.90	44.56	54	-9.44	-	-	92	290	H
			* 17.786023	55.33	PK-U	41.6	0.00	-40.90	56.03	-	-	74	-17.97	81	313	V
			* 17.800137	43.97	ADR	41.6	0.00	-41.21	44.36	54	-9.64	-	-	81	313	V
	6485		* 1.486342	57.72	PK-U	28.0	0.00	-46.00	39.72	-	-	74	-34.28	55	171	V
			* 1.487285	57.78	PK-U	28.0	0.00	-46.03	39.75	-	-	74	-34.25	55	171	H
			* 1.491742	46.16	ADR	28.0	0.00	-46.13	28.03	54	-25.97	-	-	55	171	H
			* 1.492191	46.20	ADR	28.0	0.00	-46.10	28.10	54	-25.9	-	-	55	171	V
			* 12.128610	42.01	ADR	39.0	0.00	-40.90	40.11	54	-13.89	-	-	55	171	H
			* 12.135561	53.43	PK-U	39.0	0.00	-41.00	51.43	-	-	74	-22.57	55	171	H
			* 12.136781	53.42	PK-U	39.0	0.00	-41.00	51.42	-	-	74	-22.58	55	171	V
			* 12.137009	41.73	ADR	39.0	0.00	-41.00	39.73	54	-14.27	-	-	55	171	V
			* 4.030376	44.21	ADR	33.5	0.00	-45.56	32.15	54	-21.85	-	-	55	171	V
			* 4.035015	56.29	PK-U	33.5	0.00	-45.60	44.19	-	-	74	-29.81	55	171	V
			* 4.035557	56.40	PK-U	33.5	0.00	-45.60	44.30	-	-	74	-29.7	55	171	H
			* 4.036677	44.24	ADR	33.5	0.00	-45.60	32.14	54	-21.86	-	-	55	171	H
	6525		* 12.241197	41.68	ADR	39.0	0.00	-41.68	39.00	54	-15	-	-	272	152	H
			* 12.255047	53.83	PK-U	39.0	0.00	-41.50	51.33	-	-	74	-22.67	272	152	H
			* 2.788767	58.35	PK-U	32.5	0.00	-47.10	43.75	-	-	74	-30.25	272	152	H
			* 2.794025	46.97	ADR	32.5	0.00	-47.10	32.37	54	-21.63	-	-	272	152	V
			* 2.798548	46.84	ADR	32.4	0.00	-47.20	32.04	54	-21.96	-	-	272	152	H
			* 2.817969	58.80	PK-U	32.5	0.00	-46.90	44.40	-	-	74	-29.6	272	152	V
			* 4.203735	55.14	PK-U	33.4	0.00	-46.27	42.27	-	-	74	-31.73	272	152	V
			* 4.204397	55.67	PK-U	33.4	0.00	-46.30	42.77	-	-	74	-31.23	272	152	H
			* 4.206815	43.91	ADR	33.4	0.00	-46.30	31.01	54	-22.99	-	-	272	152	H
			* 4.207019	43.80	ADR	33.4	0.00	-46.30	30.90	54	-23.1	-	-	272	152	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

80MHz

UNII-6 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	6465	6+16	3.19878	59.01	PK-U	33	-49.06	0	42.95	-	-	88.2	-45.25	360	199	H
			3.196327	47.53	ADR	33	-48.77	0	31.76	68.2	-36.44	-	-	360	199	H
			3.230919	59.37	PK-U	32.9	-48.7	0	43.57	-	-	88.2	-44.63	360	101	V
			3.212766	47.42	ADR	32.9	-48.57	0	31.75	68.2	-36.45	-	-	360	101	V
			12.861824	57.5	PK-U	39.1	-45.25	0	51.35	-	-	88.2	-36.85	360	199	H
			12.866932	45.53	ADR	39.1	-45.11	0	39.52	68.2	-28.68	-	-	360	199	H
			12.830339	57.38	PK-U	39.1	-45.13	0	51.35	-	-	88.2	-36.85	360	101	V
			12.869843	45.55	ADR	39.1	-45.34	0	39.31	68.2	-28.89	-	-	360	101	V
			* 17.891706	59.13	PK-U	41.2	-43.58	0	56.75	-	-	74	-17.25	360	199	H
			* 17.907812	46.94	ADR	41.2	-43.35	0	44.79	54	-9.21	-	-	360	199	H
			* 17.919047	59.19	PK-U	41.2	-43.89	0	56.5	-	-	74	-17.5	360	198	V
			* 17.911752	47.05	ADR	41.2	-43.2	0	45.05	54	-8.95	-	-	360	198	V
			* 3.828367	43.02	PK-U	33.7	-25.29	0	51.43	-	-	74	-22.57	360	100	H
11be (Partial RU Mode / Highest PSD)	6465 (484+242T)	6+16	* 3.840249	31.38	ADR	33.8	-25.19	0	39.99	54	-14.01	-	-	360	100	H
			* 3.849637	43.19	PK-U	33.8	-25.24	0	51.75	-	-	74	-22.25	360	100	V
			* 3.859313	31.39	ADR	33.8	-25.3	0	39.89	54	-14.11	-	-	360	100	V
			* 13.390989	44.35	ADR	39	-43.6	0	39.75	54	-14.25	-	-	360	100	H
			1.93623	42.83	PK-U	31.5	-26.81	0	47.52	-	-	88.2	-40.68	360	100	H
			1.947495	43.04	PK-U	31.5	-26.83	0	47.71	-	-	88.2	-40.49	360	100	V
			1.960528	31.05	ADR	31.6	-26.89	0	35.76	68.2	-32.44	-	-	360	100	V
			1.961185	30.93	ADR	31.6	-26.89	0	35.64	68.2	-32.56	-	-	360	100	H
			13.401288	44.28	ADR	39	-43.49	0	39.79	68.2	-28.41	-	-	360	100	V
			13.414667	56.12	PK-U	39	-43.25	0	51.87	-	-	88.2	-36.33	360	100	V
			13.415059	56.58	PK-U	39	-43.26	0	52.32	-	-	88.2	-35.88	360	100	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

160MHz



UNII-6 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	6505 (Straddle)	6 + 16	* 2.236264	61.14	PK-U	31.5	-50.47	0	42.17	-	-	74	-31.83	0	101	V
			* 2.244685	61.32	PK-U	31.5	-49.87	0	42.95	-	-	74	-31.05	0	101	H
			* 2.248800	49.58	ADR	31.5	-50.14	0	30.94	54	-23.06	-	-	0	101	H
			* 2.251089	49.68	ADR	31.5	-50.1	0	31.08	54	-22.92	-	-	0	101	V
			* 3.940951	58.64	PK-U	33.4	-48.29	0	43.75	-	-	74	-30.25	0	101	H
			* 3.949830	46.77	ADR	33.4	-48.03	0	32.14	54	-21.86	-	-	0	101	H
			* 3.950608	46.81	ADR	33.4	-48	0	32.21	54	-21.79	-	-	0	101	V
			* 3.953563	58.58	PK-U	33.4	-48.11	0	43.87	-	-	74	-30.13	0	101	V
			* 11.093154	58.77	PK-U	37.9	-44.45	0	52.22	-	-	74	-21.78	0	101	V
			* 11.098978	46.48	ADR	37.9	-44.4	0	39.98	54	-14.02	-	-	0	101	H
			* 11.103513	58.38	PK-U	37.9	-44.45	0	51.83	-	-	74	-22.17	0	101	H
			* 11.120895	46.65	ADR	37.9	-44.43	0	40.12	54	-13.88	-	-	0	101	V
11be (Partial RU Mode / Highest PSD)	6505 (996+484T RU95)	6 + 16	* 3.261219	30.94	ADR	32.9	-25.69	0	38.15	54	-15.85	-	-	0	200	V
			2.153058	31.12	ADR	31.5	-26.76	0	35.86	68.2	-32.34	-	-	0	201	V
			2.159644	43.15	PK-U	31.5	-26.66	0	47.99	-	-	88.2	-40.21	0	100	H
			2.165326	43.61	PK-U	31.4	-26.75	0	48.26	-	-	88.2	-39.94	0	201	V
			2.168069	31.33	ADR	31.4	-26.72	0	36.01	68.2	-32.19	-	-	0	100	H
			3.236807	31	ADR	33	-25.63	0	38.37	68.2	-29.83	-	-	0	100	H
			3.240958	43.1	PK-U	33	-25.63	0	50.47	-	-	88.2	-37.73	0	100	H
			3.245401	42.71	PK-U	33	-25.67	0	50.04	-	-	88.2	-38.16	0	200	V
			12.99586	44.53	ADR	38.9	-43.52	0	39.91	68.2	-28.29	-	-	0	100	H
			13.009324	56.73	PK-U	38.9	-43.47	0	52.16	-	-	88.2	-36.04	0	201	V
			13.01622	44.43	ADR	38.9	-43.56	0	39.77	68.2	-28.43	-	-	0	201	V
			13.028169	56.43	PK-U	38.9	-43.73	0	51.6	-	-	88.2	-36.6	0	100	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

WORST-CASE HARMONICS AND SPURIOUS EMISSIONS
802.11be EHT80 / 103 & 6465 / 2Tx / CDD / SU

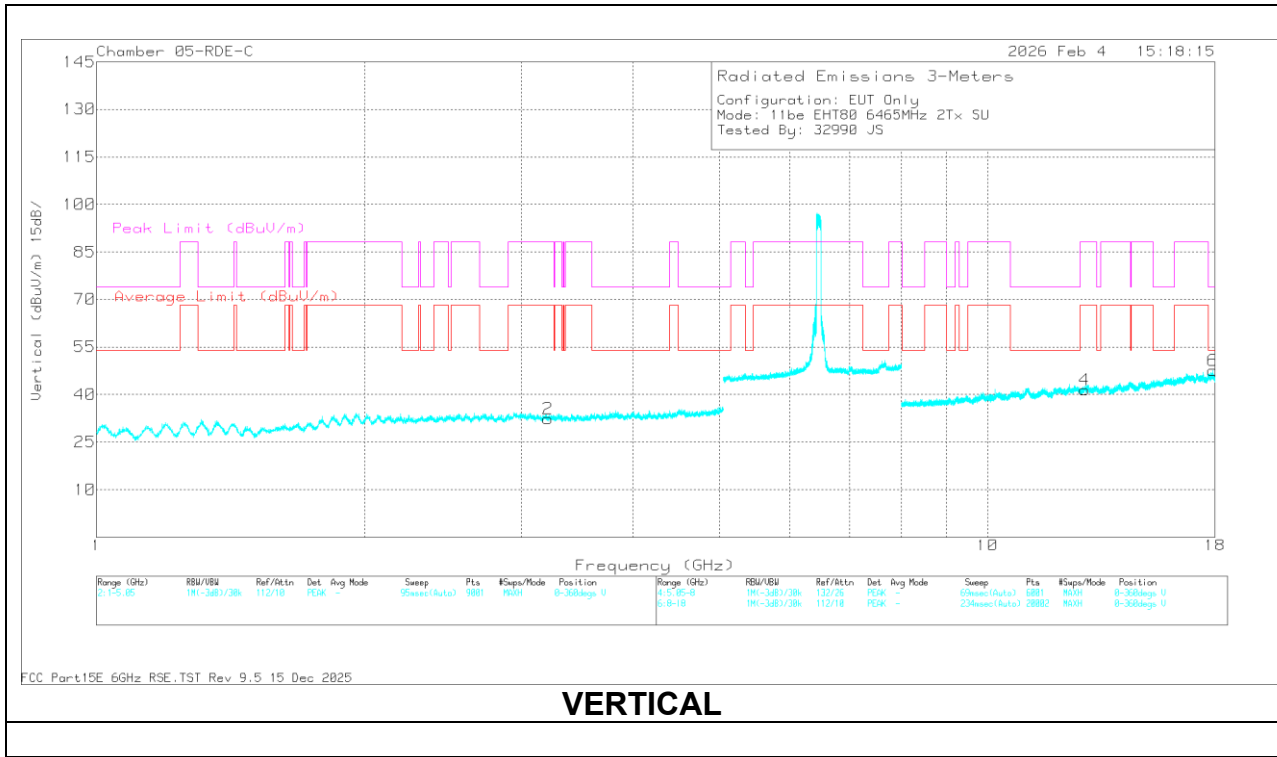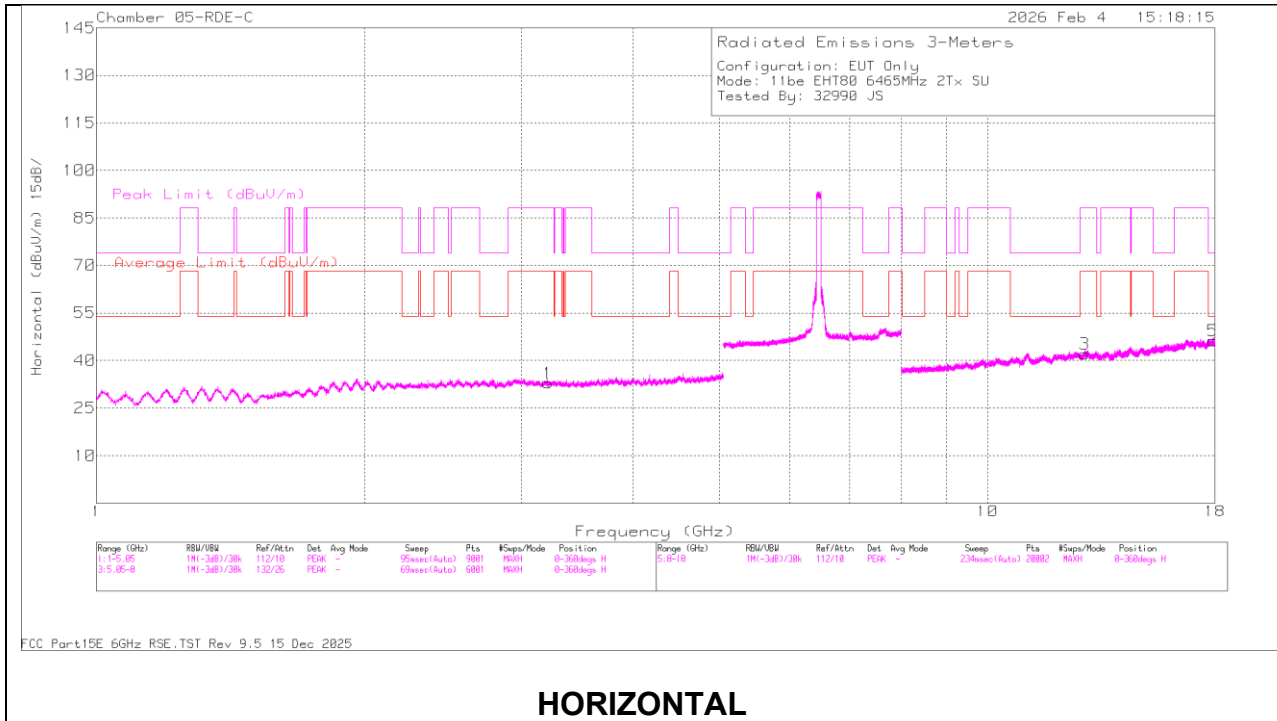

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbt/ Filt/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3.198780	59.01	PK-U	33.0	0.00	-49.06	42.95	-	-	88.2	-45.25	360	199	H
3.196327	47.53	ADR	33.0	0.00	-48.77	31.76	68.2	-36.44	-	-	360	199	H
3.230919	59.37	PK-U	32.9	0.00	-48.70	43.57	-	-	88.2	-44.63	360	101	V
3.212766	47.42	ADR	32.9	0.00	-48.57	31.75	68.2	-36.45	-	-	360	101	V
12.861824	57.50	PK-U	39.1	0.00	-45.25	51.35	-	-	88.2	-36.85	360	199	H
12.866932	45.53	ADR	39.1	0.00	-45.11	39.52	68.2	-28.68	-	-	360	199	H
12.830339	57.38	PK-U	39.1	0.00	-45.13	51.35	-	-	88.2	-36.85	360	101	V
12.869843	45.55	ADR	39.1	0.00	-45.34	39.31	68.2	-28.89	-	-	360	101	V
* 17.891706	59.13	PK-U	41.2	0.00	-43.58	56.75	-	-	74	-17.25	360	199	H
* 17.907812	46.94	ADR	41.2	0.00	-43.35	44.79	54	-9.21	-	-	360	199	H
* 17.919047	59.19	PK-U	41.2	0.00	-43.89	56.50	-	-	74	-17.5	360	198	V
* 17.911752	47.05	ADR	41.2	0.00	-43.20	45.05	54	-8.95	-	-	360	198	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.1.7. 802.11be MIMO MODE IN UNII-7 BAND – SPURIOUS EMISSIONS**20MHz**

UNII-7 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cb/ Fitr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity		
EHT20 (SU Mode)	6535	6+16	* 2.230688	61.30	PK-U	31.7	-50.33	0.00	42.67	-	-	74	-31.33	63	159	H		
			* 2.269515	49.35	ADR	31.8	-50.30	0.00	30.85	54	-23.15	-	-	63	159	H		
			* 2.261757	60.96	PK-U	31.7	-50.27	0.00	42.39	-	-	74	-31.61	239	122	V		
			* 2.269302	49.45	ADR	31.8	-50.30	0.00	30.95	54	-23.05	-	-	239	122	V		
			* 13.262338	53.99	PK-U	39.0	-43.29	0.00	49.70	-	-	74	-24.3	271	175	H		
			* 13.268661	42.26	ADR	39.0	-43.32	0.00	37.94	54	-16.06	-	-	271	175	H		
			* 15.937334	54.67	PK-U	41.1	-42.07	0.00	53.70	-	-	74	-20.3	158	142	H		
			* 15.917240	42.40	ADR	41.1	-42.24	0.00	41.26	54	-12.74	-	-	158	142	H		
			* 13.280909	53.61	PK-U	39.0	-43.42	0.00	49.19	-	-	74	-24.81	17	246	V		
			* 13.317901	42.03	ADR	39.0	-43.59	0.00	37.44	54	-16.56	-	-	17	246	V		
			* 15.922407	54.38	PK-U	41.1	-42.19	0.00	53.29	-	-	74	-20.71	4	200	V		
			* 15.922203	42.95	ADR	41.1	-42.21	0.00	41.84	54	-12.16	-	-	4	200	V		
			* 1.173864	61.49	PK-U	28.3	-49.77	0.00	40.02	-	-	74	-33.98	330	298	H		
			* 1.177646	50.02	ADR	28.4	-49.80	0.00	28.62	54	-25.38	-	-	330	298	H		
			* 2.285226	61.71	PK-U	31.8	-50.27	0.00	43.24	-	-	74	-30.76	174	318	H		
			* 2.274591	49.44	ADR	31.8	-50.31	0.00	30.93	54	-23.07	-	-	174	318	H		
	6715		* 1.176085	61.63	PK-U	28.3	-49.79	0.00	40.14	-	-	74	-33.86	108	382	V		
			* 1.176872	50.34	ADR	28.4	-49.79	0.00	28.95	54	-25.05	-	-	108	382	V		
			* 2.286904	61.33	PK-U	31.8	-50.25	0.00	42.88	-	-	74	-31.12	183	163	V		
			* 2.283228	49.51	ADR	31.8	-50.28	0.00	31.03	54	-22.97	-	-	183	163	V		
			* 11.767819	55.87	PK-U	38.7	-44.03	0.00	50.54	-	-	74	-23.46	117	385	H		
			* 11.776326	43.78	ADR	38.7	-44.16	0.00	38.32	54	-15.68	-	-	117	385	H		
			* 11.773964	55.47	PK-U	38.7	-44.20	0.00	49.97	-	-	74	-24.03	117	200	V		
			* 11.782411	43.68	ADR	38.7	-44.07	0.00	38.31	54	-15.69	-	-	117	200	V		
			6875	* 1.397997	61.69	PK-U	28.6	-49.72	0.00	40.57	-	-	74	-33.43	0	200	H	
				* 1.393441	50.01	ADR	28.6	-49.68	0.00	28.93	54	-25.07	-	-	0	200	H	
				* 2.708771	60.15	PK-U	32.6	-49.38	0.00	43.37	-	-	74	-30.63	0	101	H	
				* 2.713295	48.39	ADR	32.6	-49.41	0.00	31.58	54	-22.42	-	-	0	101	H	
				* 1.385583	61.81	PK-U	28.6	-49.70	0.00	40.71	-	-	74	-33.29	0	101	V	
				* 1.387623	50.14	ADR	28.6	-49.69	0.00	29.05	54	-24.95	-	-	0	101	V	
				* 2.707651	60.05	PK-U	32.6	-49.36	0.00	43.29	-	-	74	-30.71	0	101	V	
				* 2.717650	48.56	ADR	32.6	-49.44	0.00	31.72	54	-22.28	-	-	0	101	V	
	* 9.091006			56.22	PK-U	36.3	-45.05	0.00	47.47	-	-	74	-26.53	0	200	H		
	* 9.099189			44.54	ADR	36.3	-45.20	0.00	35.64	54	-18.36	-	-	0	200	H		
	* 9.091722			56.19	PK-U	36.3	-45.06	0.00	47.43	-	-	74	-26.57	0	200	V		
	* 9.096002			44.24	ADR	36.3	-45.12	0.00	35.42	54	-18.58	-	-	0	200	V		
	EHT20 (26T RU0)			6535	* 2.230241	61.24	PK-U	31.5	-50.02	0.00	42.72	-	-	74	-31.28	148	158	H
					* 2.251158	49.87	ADR	31.5	-50.10	0.00	31.27	54	-22.73	-	-	148	158	V
					* 2.251407	61.62	PK-U	31.5	-50.10	0.00	43.02	-	-	74	-30.98	148	158	V
					* 2.251599	49.55	ADR	31.5	-50.10	0.00	30.95	54	-23.05	-	-	148	158	H
			* 3.646307		58.51	PK-U	33.6	-47.88	0.00	44.23	-	-	74	-29.77	148	158	V	
			* 3.649463		46.69	ADR	33.6	-48.05	0.00	32.24	54	-21.76	-	-	148	158	V	
			* 3.653700		46.57	ADR	33.5	-47.76	0.00	32.31	54	-21.69	-	-	148	158	H	
			* 3.656851		58.71	PK-U	33.5	-48.10	0.00	44.11	-	-	74	-29.89	148	158	H	
			* 11.080994		58.40	PK-U	37.9	-44.40	0.00	51.90	-	-	74	-22.1	148	158	H	
			* 11.087134		46.88	ADR	37.9	-44.56	0.00	40.22	54	-13.78	-	-	148	158	H	
			* 11.090849		58.65	PK-U	37.9	-44.27	0.00	52.28	-	-	74	-21.72	148	158	V	
			* 11.091533		46.65	ADR	37.9	-44.25	0.00	40.30	54	-13.7	-	-	148	158	V	
EHT20 (26T RU4)	6715	6+16	* 2.249359	61.38	PK-U	31.5	-50.03	0.00	42.85	-	-	74	-31.15	133	225	V		
			* 2.253198	49.62	ADR	31.5	-49.90	0.00	31.22	54	-22.78	-	-	133	225	V		
			* 2.254942	49.71	ADR	31.5	-49.92	0.00	31.29	54	-22.71	-	-	133	225	H		
			* 2.258363	61.44	PK-U	31.5	-50.07	0.00	42.87	-	-	74	-31.13	133	225	H		
			* 3.773276	47.41	ADR	33.4	-47.93	0.00	32.88	54	-21.12	-	-	133	225	H		
			* 3.776057	59.35	PK-U	33.4	-47.92	0.00	44.83	-	-	74	-29.17	133	225	H		
			* 3.778174	58.82	PK-U	33.4	-48.00	0.00	44.22	-	-	74	-29.78	133	225	V		
			* 3.785898	47.20	ADR	33.4	-47.89	0.00	32.71	54	-21.29	-	-	133	225	V		
			* 11.058960	46.74	ADR	37.8	-44.91	0.00	39.63	54	-14.37	-	-	133	225	H		
			* 11.069639	58.79	PK-U	37.9	-44.80	0.00	51.89	-	-	74	-22.11	133	225	H		
			* 11.070539	47.06	ADR	37.9	-44.69	0.00	40.27	54	-13.73	-	-	133	225	V		
			* 11.076842	58.60	PK-U	37.9	-44.35	0.00	52.15	-	-	74	-21.85	133	225	V		
EHT20 (26T RU8)	6875		* 2.235875	61.56	PK-U	31.5	-50.41	0.00	42.65	-	-	74	-31.35	83	120	V		
			* 2.243744	61.47	PK-U	31.5	-49.83	0.00	43.14	-	-	74	-30.86	83	120	H		
			* 2.247068	49.68	ADR	31.5	-50.30	0.00	30.88	54	-23.12	-	-	83	120	H		
			* 2.248043	49.78	ADR	31.5	-50.29	0.00	30.99	54	-23.01	-	-	83	120	V		
			* 3.994109	47.20	ADR	33.5	-48.05	0.00	32.65	54	-21.35	-	-	83	120	H		
			* 4.000216	47.18	ADR	33.5	-47.90	0.00	32.78	54	-21.22	-	-	83	120	V		
			* 4.000384	58.95	PK-U	33.5	-47.90	0.00	44.55	-	-	74	-29.45	83	120	H		
			* 4.013815	59.06	PK-U	33.5	-47.96	0.00	44.60	-	-	74	-29.4	83	120	V		
			* 11.114169	46.50	ADR	37.9	-44.55	0.00	39.85	54	-14.15	-	-	83	120	H		
			* 11.120676	46.75	ADR	37.9	-44.50	0.00	40.15	54	-13.85	-	-	83	120	V		
			* 11.126020	58.12	PK-U	37.9	-44.70	0.00	51.32	-	-	74	-22.68	83	120	H		
			* 11.136703	58.19	PK-U	37.9	-44.77	0.00	51.32	-	-	74	-22.68	83	120	V		

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

20MHz Cont.

UNII-5 (MIMO CDD)	Channel Frequency MHz	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbt/Fit r/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (RU Mode)	6535 (52+26T RU70)	6+16	* 1.317919	46.54	ADR	29.0	0.00	-46.30	29.24	54	-24.76	-	-	360	199	V
			* 1.318417	58.51	PK-U	29.0	0.00	-46.30	41.21	-	-	74	-32.79	360	101	H
			* 1.319906	46.63	ADR	28.9	0.00	-46.30	29.23	54	-24.77	-	-	360	101	H
			* 1.322603	58.21	PK-U	28.8	0.00	-46.30	40.71	-	-	74	-33.29	360	199	V
			* 4.830217	39.02	ADR	34.2	0.00	-39.90	33.32	54	-20.68	-	-	360	199	H
			* 4.832781	50.84	PK-U	34.2	0.00	-39.90	45.14	-	-	74	-28.86	360	199	H
			* 4.838466	39.14	ADR	34.1	0.00	-39.80	33.44	54	-20.56	-	-	360	199	V
			* 4.870164	51.07	PK-U	34.1	0.00	-39.80	45.37	-	-	74	-28.63	360	199	V
			13.088915	46.58	PK-U	39.1	0.00	-34.30	51.38	-	-	88.2	-36.82	360	101	H
			13.091817	47.06	PK-U	39.1	0.00	-34.30	51.86	-	-	88.2	-36.34	360	200	V
			13.095728	34.75	ADR	39.1	0.00	-34.40	39.45	68.2	-28.75	-	-	360	101	H
			13.097461	34.83	ADR	39.1	0.00	-34.40	39.53	68.2	-28.67	-	-	360	200	V
	3.068375		59.42	PK-U	33.1	0.00	-47.60	44.92	-	-	88.2	-43.28	360	101	H	
	3.082925		46.85	ADR	33.1	0.00	-47.60	32.35	68.2	-35.85	-	-	360	101	H	
	3.071455		59.09	PK-U	33.1	0.00	-47.65	44.54	-	-	88.2	-43.66	360	200	V	
	3.078876		47.02	ADR	33.1	0.00	-47.60	32.52	68.2	-35.68	-	-	360	200	V	
	10.08508		56.80	PK-U	37.4	0.00	-45.50	48.70	-	-	88.2	-39.5	360	200	H	
	10.108898		45.00	ADR	37.4	0.00	-45.10	37.30	68.2	-30.9	-	-	360	200	H	
	17.130199		53.54	PK-U	41.4	0.00	-40.30	54.64	-	-	88.2	-33.56	140	101	H	
	17.135507		41.63	ADR	41.4	0.00	-40.20	42.83	68.2	-25.37	-	-	140	101	H	
	10.109962		56.60	PK-U	37.4	0.00	-45.10	48.90	-	-	88.2	-39.3	140	200	V	
	10.08778		45.02	ADR	37.4	0.00	-45.50	36.92	68.2	-31.28	-	-	140	200	V	
	17.125716		53.74	PK-U	41.4	0.00	-40.30	54.84	-	-	88.2	-33.36	140	200	V	
	17.129403		41.53	ADR	41.4	0.00	-40.30	42.63	68.2	-25.57	-	-	140	200	V	
	3.04099		58.91	PK-U	33.0	0.00	-47.70	44.21	-	-	88.2	-43.99	360	200	H	
	3.010442		47.03	ADR	32.9	0.00	-47.84	32.09	68.2	-36.11	-	-	360	200	H	
	3.033397		58.76	PK-U	33.0	0.00	-47.74	44.02	-	-	88.2	-44.18	360	200	V	
	3.029686		46.99	ADR	33.0	0.00	-47.80	32.19	68.2	-36.01	-	-	360	200	V	
	10.21939		56.74	PK-U	37.6	0.00	-44.90	49.44	-	-	88.2	-38.76	360	200	H	
	10.224957		45.16	ADR	37.6	0.00	-44.90	37.86	68.2	-30.34	-	-	360	200	H	
	17.080775		52.78	PK-U	41.4	0.00	-40.58	53.60	-	-	88.2	-34.6	360	200	H	
	17.082707		41.32	ADR	41.4	0.00	-40.53	42.19	68.2	-26.01	-	-	360	200	H	
	10.231476		56.84	PK-U	37.6	0.00	-45.00	49.44	-	-	88.2	-38.76	360	200	V	
	10.23228		45.37	ADR	37.6	0.00	-45.03	37.94	68.2	-30.26	-	-	360	200	V	
	17.08491		53.18	PK-U	41.4	0.00	-40.60	53.98	-	-	88.2	-34.22	360	200	V	
	17.096649		41.37	ADR	41.4	0.00	-40.50	42.27	68.2	-25.93	-	-	360	200	V	

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

40MHz

UNII-7 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT40 (SU Mode)	6565	6+16	* 12.344987	53.02	PK-U	38.8	-40.80	0.00	51.02	-	-	74	-22.98	20	189	H
			* 12.371541	41.45	ADR	38.7	-40.15	0.00	40.00	54	-14	-	-	20	189	H
			* 12.375232	53.10	PK-U	38.7	-40.18	0.00	51.62	-	-	74	-22.38	20	189	V
			* 12.378648	41.47	ADR	38.7	-40.30	0.00	39.87	54	-14.13	-	-	20	189	V
			* 2.264135	58.18	PK-U	32.0	-46.70	0.00	43.48	-	-	74	-30.52	20	189	V
			* 2.267917	45.81	ADR	32.0	-46.70	0.00	31.11	54	-22.89	-	-	20	189	V
			* 2.268836	45.92	ADR	32.0	-46.70	0.00	31.22	54	-22.78	-	-	20	189	H
			* 2.276786	57.22	PK-U	32.0	-46.70	0.00	42.52	-	-	74	-31.48	20	189	H
			* 4.144943	56.74	PK-U	33.4	-45.69	0.00	44.45	-	-	74	-29.55	20	189	H
			* 4.146143	44.29	ADR	33.4	-45.70	0.00	31.99	54	-22.01	-	-	20	189	H
			* 4.148161	44.34	ADR	33.4	-45.80	0.00	31.94	54	-22.06	-	-	20	189	V
			* 4.149534	56.56	PK-U	33.4	-45.80	0.00	44.16	-	-	74	-29.84	20	189	V
	6685		* 15.554246	54.85	PK-U	40.3	-42.10	0.00	53.05	-	-	74	-20.95	2	114	V
			* 15.563141	43.46	ADR	40.3	-42.31	0.00	41.45	54	-12.55	-	-	2	114	H
			* 15.566145	43.28	ADR	40.3	-42.40	0.00	41.18	54	-12.82	-	-	2	114	V
			* 15.566357	54.97	PK-U	40.3	-42.40	0.00	52.87	-	-	74	-21.13	2	114	H
			* 2.794616	58.01	PK-U	32.5	-47.16	0.00	43.35	-	-	74	-30.65	2	114	V
			* 2.796358	58.59	PK-U	32.5	-47.20	0.00	43.89	-	-	74	-30.11	2	114	H
			* 2.799913	46.45	ADR	32.4	-47.20	0.00	31.65	54	-22.35	-	-	2	114	H
			* 2.801202	46.49	ADR	32.5	-47.12	0.00	31.87	54	-22.13	-	-	2	114	V
			* 4.023187	55.70	PK-U	33.5	-45.70	0.00	43.50	-	-	74	-30.5	2	114	V
			* 4.032466	55.51	PK-U	33.5	-45.60	0.00	43.41	-	-	74	-30.59	2	114	H
			* 4.035919	44.05	ADR	33.5	-45.60	0.00	31.95	54	-22.05	-	-	2	114	H
			* 4.036599	43.94	ADR	33.5	-45.60	0.00	31.84	54	-22.16	-	-	2	114	V
	6845		* 12.363519	53.98	PK-U	38.8	-40.35	0.00	52.43	-	-	74	-21.57	319	316	V
			* 12.382733	42.00	ADR	38.8	-40.37	0.00	40.43	54	-13.57	-	-	319	316	H
			* 12.383253	53.75	PK-U	38.8	-40.37	0.00	52.18	-	-	74	-21.82	319	316	H
			* 12.383785	41.89	ADR	38.8	-40.32	0.00	40.37	54	-13.63	-	-	319	316	V
			* 2.210432	45.76	ADR	31.8	-46.56	0.00	31.00	54	-23	-	-	319	316	H
			* 2.214346	45.78	ADR	31.8	-46.53	0.00	31.05	54	-22.95	-	-	319	316	V
			* 2.227484	57.44	PK-U	31.9	-46.60	0.00	42.74	-	-	74	-31.26	319	316	H
			* 2.242454	57.36	PK-U	31.9	-46.70	0.00	42.56	-	-	74	-31.44	319	316	V
			* 3.977539	43.72	ADR	33.5	-45.55	0.00	31.67	54	-22.33	-	-	319	316	V
			* 3.979209	43.84	ADR	33.5	-45.58	0.00	31.76	54	-22.24	-	-	319	316	H
			* 3.983240	55.19	PK-U	33.5	-45.50	0.00	43.19	-	-	74	-30.81	319	316	V
			* 3.985529	55.61	PK-U	33.5	-45.50	0.00	43.61	-	-	74	-30.39	319	316	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

80MHz

UNII-7 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dBm)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity		
11be (SU Mode / Highest Power)	6545 (Straddle)	6 + 16	3.23368	59.14	PK-U	32.9	-48.46	0	43.58	-	-	88.2	-44.62	360	101	H		
			3.250745	47.54	ADR	32.9	-48.6	0	31.84	68.2	-36.36	-	-	360	101	H		
			3.244954	59.19	PK-U	32.9	-48.31	0	43.78	-	-	88.2	-44.42	360	101	V		
			3.236497	47.34	ADR	32.9	-48.7	0	31.54	68.2	-36.66	-	-	360	101	V		
			13.00559	59.31	PK-U	39	-45.52	0	52.79	-	-	88.2	-35.41	293	101	H		
			13.013781	47.12	ADR	39	-45.5	0	40.62	68.2	-27.58	-	-	293	101	H		
			13.006806	58.63	PK-U	39	-45.88	0	51.75	-	-	88.2	-36.45	293	101	V		
			13.019049	47.07	ADR	39	-45.8	0	40.27	68.2	-27.93	-	-	293	101	V		
			* 17.741573	59.02	PK-U	41.1	-44.37	0	55.75	-	-	74	-18.25	293	101	H		
			* 17.747701	47.21	ADR	41.1	-44.3	0	44.01	54	-9.99	-	-	293	101	H		
			* 17.750988	58.6	PK-U	41.1	-44.1	0	55.6	-	-	74	-18.4	293	101	V		
			* 17.745549	47.22	ADR	41.1	-44.5	0	43.82	54	-10.18	-	-	293	101	V		
			3.342304	58.79	PK-U	32.8	-48.29	0	43.3	-	-	88.2	-44.9	360	101	H		
			3.312903	47.06	ADR	32.9	-48.37	0	31.59	68.2	-36.61	-	-	360	101	H		
			3.313286	58.88	PK-U	32.9	-48.37	0	43.41	-	-	88.2	-44.79	360	101	V		
	6705		3.315427	46.99	ADR	32.9	-48.26	0	31.63	68.2	-36.57	-	-	360	101	V		
			* 13.312387	57.96	PK-U	39	-45.48	0	51.48	-	-	74	-22.52	360	101	H		
			* 13.347828	46.23	ADR	39	-45.78	0	39.45	54	-14.55	-	-	360	101	H		
			* 13.313247	58.99	PK-U	39	-45.32	0	52.67	-	-	74	-21.33	360	101	V		
			* 13.310451	46.11	ADR	39	-45.3	0	39.81	54	-14.19	-	-	360	101	V		
			* 17.791201	58.8	PK-U	41.1	-44.3	0	55.6	-	-	74	-18.4	360	101	H		
			* 17.787298	47.02	ADR	41.1	-44.42	0	43.7	54	-10.3	-	-	360	101	H		
			* 17.762200	58.6	PK-U	41.1	-44.6	0	55.1	-	-	74	-18.9	360	101	V		
			* 17.784410	47.4	ADR	41.1	-44.22	0	44.28	54	-9.72	-	-	360	101	V		
			6865 (Straddle)	3.417445	58.81	PK-U	32.8	-48	0	43.61	-	-	88.2	-44.59	360	101	H	
				3.430324	47.04	ADR	32.8	-48.13	0	31.71	68.2	-36.49	-	-	360	101	H	
				3.413072	58.64	PK-U	32.8	-48.01	0	43.43	-	-	88.2	-44.77	360	101	V	
				3.417552	46.99	ADR	32.8	-48	0	31.79	68.2	-36.41	-	-	360	101	V	
				13.652265	59.42	PK-U	38.8	-45.11	0	53.11	-	-	88.2	-35.09	360	101	H	
				13.647018	47.42	ADR	38.8	-45.2	0	41.02	68.2	-27.18	-	-	360	101	H	
	13.658117			59.77	PK-U	38.8	-45.42	0	53.15	-	-	88.2	-35.05	360	101	V		
	13.634383			47.43	ADR	38.8	-45.2	0	41.03	68.2	-27.17	-	-	360	101	V		
	* 17.762267			58.72	PK-U	41.1	-44.57	0	55.25	-	-	74	-18.75	360	101	H		
	* 17.762855			47.22	ADR	41.1	-44.27	0	44.05	54	-9.95	-	-	360	101	H		
	* 17.750776			59	PK-U	41.1	-44.17	0	55.93	-	-	74	-18.07	360	101	V		
	* 17.750648			47.27	ADR	41.1	-44.21	0	44.16	54	-9.84	-	-	360	101	V		
	11be (Partial RU Mode / Highest PSD)			EHT80 6545 (484+242T RU92)	* 3.905177	42.96	PK-U	33.9	-25.24	0	51.62	-	-	74	-22.38	360	100	H
					* 3.918850	30.91	ADR	33.9	-25.14	0	39.67	54	-14.33	-	-	360	100	H
					* 3.905080	42.61	PK-U	33.9	-25.24	0	51.27	-	-	74	-22.73	360	100	V
			* 3.896023		31.06	ADR	33.9	-25.25	0	39.71	54	-14.29	-	-	360	100	V	
			1.943135		42.72	PK-U	31.5	-26.93	0	47.29	-	-	88.2	-40.91	360	100	V	
			1.950389		30.9	ADR	31.5	-26.82	0	35.58	68.2	-32.62	-	-	360	100	V	
			1.954226		31.08	ADR	31.6	-26.91	0	35.77	68.2	-32.43	-	-	360	100	H	
			1.955678		43.03	PK-U	31.6	-26.93	0	47.7	-	-	88.2	-40.5	360	100	H	
			9.882679		45.45	ADR	37.3	-45.31	0	37.44	68.2	-30.76	-	-	360	100	V	
			9.892935		57.5	PK-U	37.3	-45.13	0	49.67	-	-	88.2	-38.53	360	100	V	
			9.899268		57.14	PK-U	37.3	-45.25	0	49.19	-	-	88.2	-39.01	360	100	H	
			9.91864		45.46	ADR	37.3	-45.24	0	37.52	68.2	-30.68	-	-	360	100	H	
			* 4.225105		43.5	PK-U	33.7	-25.11	0	52.09	-	-	74	-21.91	360	100	H	
			* 4.224476		31.61	ADR	33.7	-25.1	0	40.21	54	-13.79	-	-	360	100	H	
* 4.225102		43.83	PK-U		33.7	-25.11	0	52.42	-	-	74	-21.58	360	100	V			
* 4.229316		31.82	ADR	33.7	-25.13	0	40.39	54	-13.61	-	-	360	100	V				
EHT80 6705 (484+242T RU93)		1.935415	43.63	PK-U	31.5	-26.8	0	48.33	-	-	88.2	-39.87	360	100	H			
		1.948694	31.6	ADR	31.5	-26.82	0	36.28	68.2	-31.92	-	-	360	100	H			
		1.951628	31.61	ADR	31.6	-26.84	0	36.37	68.2	-31.83	-	-	360	100	V			
		1.966236	43.15	PK-U	31.6	-26.85	0	47.9	-	-	88.2	-40.3	360	100	V			
		14.504978	57.31	PK-U	39.4	-44.34	0	52.37	-	-	88.2	-35.83	360	100	V			
		14.509361	44.99	ADR	39.4	-44.43	0	39.96	68.2	-28.24	-	-	360	100	H			
		14.519684	56.71	PK-U	39.4	-44.31	0	51.8	-	-	88.2	-36.4	360	100	H			
		14.523656	45.17	ADR	39.4	-44.2	0	40.37	68.2	-27.83	-	-	360	100	V			
		* 3.876596	43.29	PK-U	33.8	-25.4	0	51.69	-	-	74	-22.31	360	100	H			
		* 3.871613	31.35	ADR	33.8	-25.35	0	39.8	54	-14.2	-	-	360	100	H			
		* 3.840735	43.62	PK-U	33.8	-25.18	0	52.24	-	-	74	-21.76	360	100	V			
		* 3.870873	31.4	ADR	33.8	-25.34	0	39.86	54	-14.14	-	-	360	100	V			
		2.012043	31.35	ADR	31.6	-26.86	0	36.09	68.2	-32.11	-	-	360	100	V			
		2.014663	44.42	PK-U	31.6	-26.92	0	49.1	-	-	88.2	-39.1	360	100	V			
	2.030431	31.4	ADR	31.6	-26.97	0	36.03	68.2	-32.17	-	-	360	100	H				
EHT80 6865 (484+242T RU92)	2.031676	43.48	PK-U	31.6	-26.99	0	48.09	-	-	88.2	-40.11	360	100	H				
	9.882282	57.56	PK-U	37.3	-45.31	0	49.55	-	-	88.2	-38.65	360	100	V				
	9.911521	45.54	ADR	37.3	-45.34	0	37.5	68.2	-30.7	-	-	360	100	H				
	9.917123	57.12	PK-U	37.3	-45.26	0	49.16	-	-	88.2	-39.04	360	100	H				
	9.918278	45.49	ADR	37.3	-45.25	0	37.54	68.2	-30.66	-	-	360	100	V				

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

160MHz



UNII-7 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azim (Degs)	Height (cm)	Polarity		
11be (SU Mode / Highest Power)	6665	6 + 16	* 2.233982	61.8	PK-U	31.5	-50.09	0.00	43.21	-	-	74	-30.79	0	101	V		
			* 2.239128	49.58	ADR	31.5	-50.01	0.00	31.07	54	-22.93	-	-	0	101	H		
			* 2.240212	49.52	ADR	31.5	-49.99	0.00	31.03	54	-22.97	-	-	0	101	V		
			* 2.256895	61.2	PK-U	31.5	-50.12	0.00	42.58	-	-	74	-31.42	0	101	H		
			* 4.007827	47.26	ADR	33.5	-48.03	0.00	32.73	54	-21.27	-	-	0	101	V		
			* 4.008867	58.72	PK-U	33.5	-48.01	0.00	44.21	-	-	74	-29.79	0	101	H		
			* 4.009592	59.83	PK-U	33.5	-48	0.00	45.33	-	-	74	-28.67	0	101	V		
			* 4.010583	47.2	ADR	33.5	-48	0.00	32.7	54	-21.3	-	-	0	101	H		
			* 12.540985	58.74	PK-U	39	-44.8	0.00	52.94	-	-	74	-21.06	0	101	H		
			* 12.542185	46.89	ADR	39	-44.76	0.00	41.13	54	-12.87	-	-	0	101	V		
			* 12.551060	58.62	PK-U	39	-45.11	0.00	52.51	-	-	74	-21.49	0	101	V		
			* 12.554584	46.86	ADR	39	-45.44	0.00	40.42	54	-13.58	-	-	0	101	H		
	6825 (Straddle)		* 2.234081	49.78	ADR	31.5	-50.08	0.00	31.2	54	-22.8	-	-	-	-	270	229	H
			* 2.242147	61.15	PK-U	31.5	-49.73	0.00	42.92	-	-	-	-	74	-31.08	270	229	H
			* 2.251791	49.77	ADR	31.5	-50.1	0.00	31.17	54	-22.83	-	-	-	-	270	229	V
			* 2.261656	61.42	PK-U	31.5	-50.07	0.00	42.85	-	-	-	-	74	-31.15	270	229	V
			* 4.169221	46.98	ADR	33.5	-48.04	0.00	32.44	54	-21.56	-	-	-	-	270	229	V
			* 4.171394	58.88	PK-U	33.5	-47.94	0.00	44.44	-	-	-	-	74	-29.56	270	229	V
			* 4.177163	47.05	ADR	33.4	-47.9	0.00	32.55	54	-21.45	-	-	-	-	270	229	H
			* 4.186784	58.88	PK-U	33.4	-47.92	0.00	44.36	-	-	-	-	74	-29.64	270	229	H
			* 15.859164	59.58	PK-U	40.6	-45.85	0.00	54.33	-	-	-	-	74	-19.67	270	229	H
			* 15.879274	47.82	ADR	40.6	-45.55	0.00	42.87	54	-11.13	-	-	-	-	270	229	V
			* 15.887781	47.9	ADR	40.7	-45.7	0.00	42.9	54	-11.1	-	-	-	-	270	229	H
			* 15.895976	59.7	PK-U	40.7	-45.8	0.00	54.6	-	-	-	-	74	-19.4	270	229	V
11be (Partial RU Mode / Highest PSD)	6665 (996+484T RU 95)	* 13.330739	44.44	ADR	39	-43.78	0.00	39.66	54	-14.34	-	-	-	0	201	V		
		* 13.336415	55.66	PK-U	39	-43.73	0.00	50.93	-	-	-	-	74	-23.07	0	100	H	
		* 13.342021	44.35	ADR	39	-43.8	0.00	39.55	54	-14.45	-	-	-	0	100	H		
		* 13.345126	55.72	PK-U	39	-43.72	0.00	51	-	-	-	-	74	-23	0	201	V	
		* 2.215778	43.14	PK-U	31.5	-26.65	0.00	47.99	-	-	-	-	74	-26.01	0	100	H	
		* 2.227143	31.21	ADR	31.5	-26.72	0.00	35.99	54	-18.01	-	-	-	0	100	H		
		* 2.239147	43.95	PK-U	31.5	-26.72	0.00	48.73	-	-	-	-	74	-25.27	0	100	V	
		* 2.241004	31.32	ADR	31.5	-26.77	0.00	36.05	54	-17.95	-	-	-	0	100	V		
		3.315647	42.63	PK-U	32.9	-25.68	0.00	49.85	-	-	-	-	88.2	-38.35	0	100	V	
		3.318853	31.15	ADR	32.9	-25.7	0.00	38.35	68.2	-29.85	-	-	-	0	100	V		
		3.319247	42.86	PK-U	32.9	-25.7	0.00	50.06	-	-	-	-	88.2	-38.14	0	100	H	
		3.321255	31.09	ADR	32.9	-25.69	0.00	38.3	68.2	-29.9	-	-	-	0	100	H		
	6825 (996+484T RU 94)	* 2.27574	31.57	ADR	31.6	-26.64	0.00	36.53	54	-17.47	-	-	-	-	360	100	V	
		* 2.281425	43.95	PK-U	31.6	-26.6	0.00	48.95	-	-	-	-	74	-25.05	360	100	H	
		* 2.282308	31.77	ADR	31.6	-26.62	0.00	36.75	54	-17.25	-	-	-	-	360	100	H	
		* 2.289656	43.56	PK-U	31.6	-26.62	0.00	48.54	-	-	-	-	74	-25.46	360	100	V	
		13.634823	55.58	PK-U	38.8	-43.94	0.00	50.44	-	-	-	-	88.2	-37.76	360	100	H	
		13.650761	43.86	ADR	38.8	-43.96	0.00	38.7	68.2	-29.5	-	-	-	-	360	201	V	
		13.654143	55.82	PK-U	38.8	-43.95	0.00	50.67	-	-	-	-	88.2	-37.53	360	201	V	
		13.658631	44.3	ADR	38.8	-43.89	0.00	39.21	68.2	-28.99	-	-	-	-	360	100	H	
		3.402187	30.73	ADR	32.9	-25.38	0.00	38.25	68.2	-29.95	-	-	-	-	360	100	V	
		3.405326	30.73	ADR	32.9	-25.33	0.00	38.3	68.2	-29.9	-	-	-	-	360	100	H	
		3.41254	42.61	PK-U	32.9	-25.42	0.00	50.09	-	-	-	-	88.2	-38.11	360	100	V	
		3.421471	42.73	PK-U	32.9	-25.43	0.00	50.2	-	-	-	-	88.2	-38	360	100	H	

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

WORST-CASE HARMONICS AND SPURIOUS EMISSIONS
802.11be EHT80 / 6705 MHz / 2TX CDD / SU:

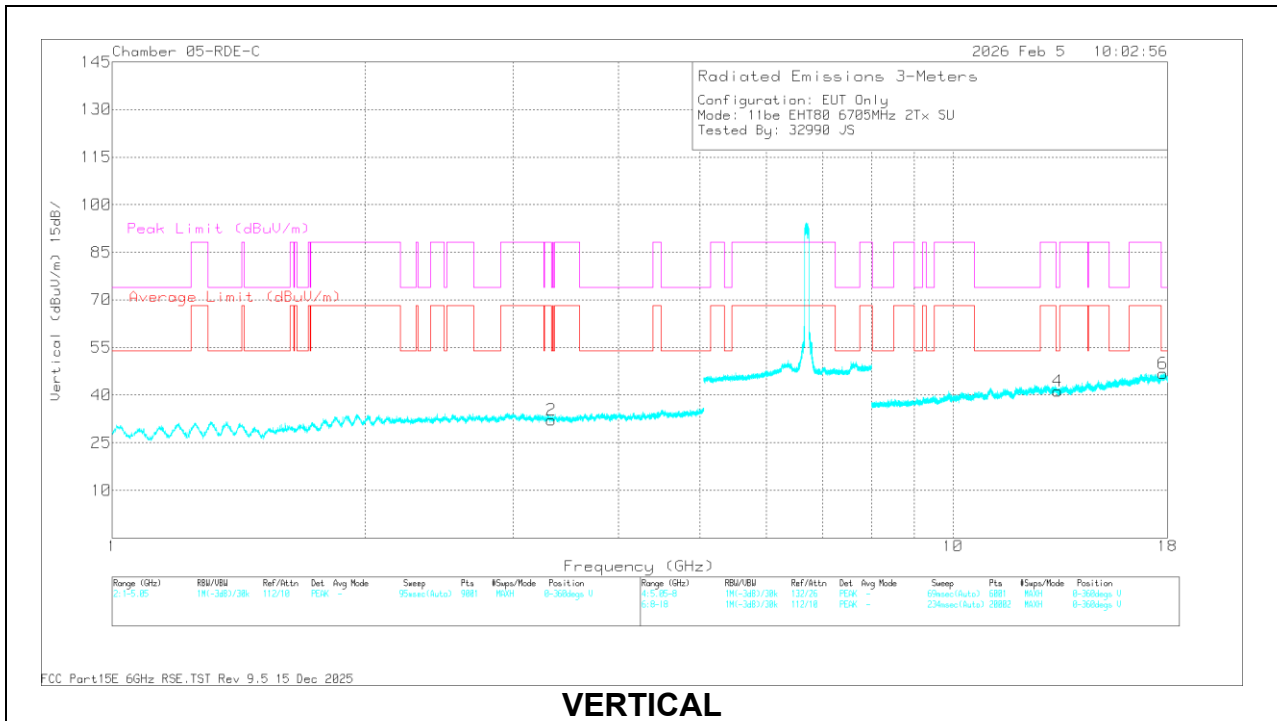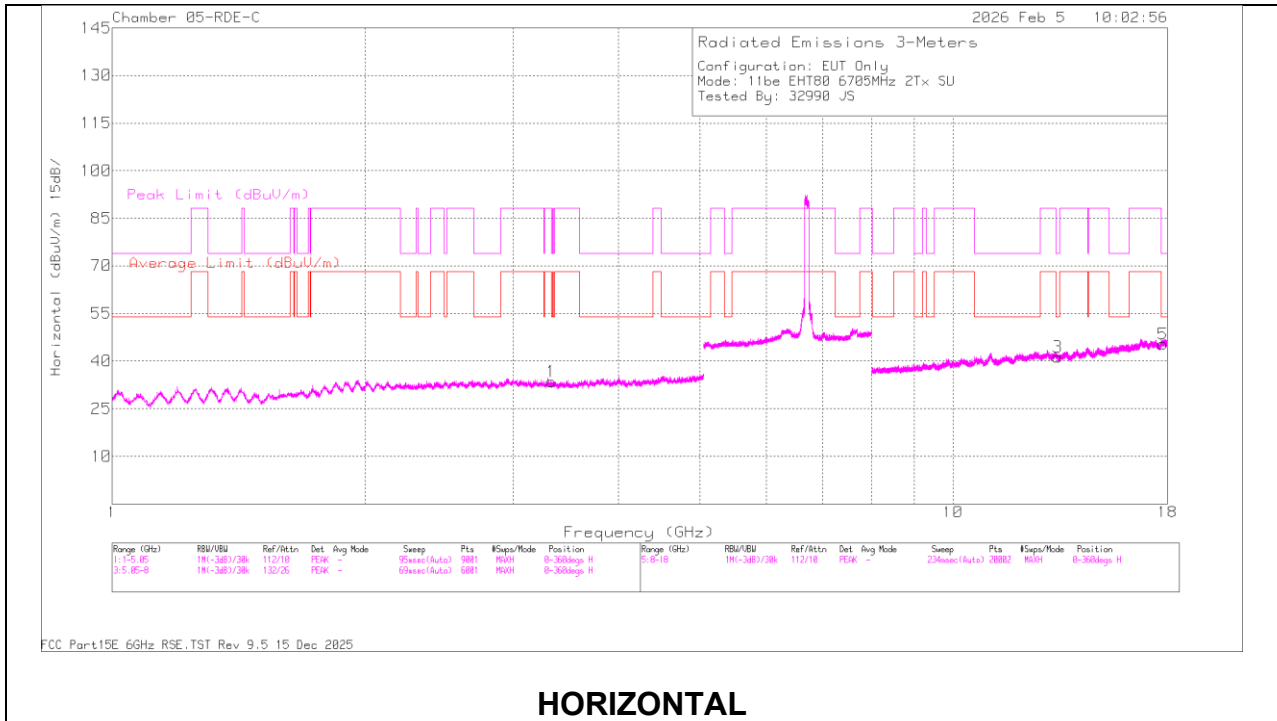

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbt/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3.342304	58.79	PK-U	32.8	0.00	-48.29	43.30	-	-	88.2	-44.9	360	101	H
3.312903	47.06	ADR	32.9	0.00	-48.37	31.59	68.2	-36.61	-	-	360	101	H
3.313286	58.88	PK-U	32.9	0.00	-48.37	43.41	-	-	88.2	-44.79	360	101	V
3.315427	46.99	ADR	32.9	0.00	-48.26	31.63	68.2	-36.57	-	-	360	101	V
* 13.312387	57.96	PK-U	39.0	0.00	-45.48	51.48	-	-	74	-22.52	360	101	H
* 13.347828	46.23	ADR	39.0	0.00	-45.78	39.45	54	-14.55	-	-	360	101	H
* 13.313247	58.99	PK-U	39.0	0.00	-45.32	52.67	-	-	74	-21.33	360	101	V
* 13.310451	46.11	ADR	39.0	0.00	-45.30	39.81	54	-14.19	-	-	360	101	V
* 17.791201	58.80	PK-U	41.1	0.00	-44.30	55.60	-	-	74	-18.4	360	101	H
* 17.787298	47.02	ADR	41.1	0.00	-44.42	43.70	54	-10.3	-	-	360	101	H
* 17.762200	58.60	PK-U	41.1	0.00	-44.60	55.10	-	-	74	-18.9	360	101	V
* 17.784410	47.40	ADR	41.1	0.00	-44.22	44.28	54	-9.72	-	-	360	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.1.8. 802.11a SISO MODE IN UNII-8 BAND – BANDEDGE

UNII-8 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11a	7115	6	7.125	-30.95	Pk	35.6	11.8	0	-33.85	-17.4	-	-	-7	-10.4	155	210	H
			7.125145	-30.53	Pk	35.6	11.8	0	-33.85	-16.98	-	-	-7	-9.98	155	210	H
			7.125	-49.6	RMS	35.6	11.8	0	-33.85	-36.05	-27	-9.05	-	-	155	210	H
			7.514735	-61.18	RMS	35.6	11.8	0	-33.73	-47.51	-41.2	-6.31	-	-	155	210	H
			7.125	-25.97	Pk	35.6	11.8	0	-33.85	-12.42	-	-	-7	-5.42	70	175	V
			7.125223	-26.61	Pk	35.6	11.8	0	-33.85	-13.06	-	-	-7	-6.06	70	175	V
		16	7.125	-43.32	RMS	35.6	11.8	0	-33.85	-29.77	-27	-2.77	-	-	70	175	V
			7.125068	-45.02	RMS	35.6	11.8	0	-33.85	-31.47	-27	-4.47	-	-	70	175	V
			7.125	-42.14	RMS	35.7	11.8	0	-35.7	-30.34	-27	-3.34	-	-	344	213	H
			7.125068	-43.87	RMS	35.7	11.8	0	-35.7	-32.07	-27	-5.07	-	-	344	213	H
			7.125	-25.96	Pk	35.7	11.8	0	-35.7	-14.16	-	-	-7	-7.16	344	213	H
			7.125145	-26.18	Pk	35.7	11.8	0	-35.7	-14.38	-	-	-7	-7.38	344	213	H
			* 7.406235	-60.46	RMS	35.7	11.8	0	-35.3	-48.26	-41.2	-7.06	-	-	255	126	V
			7.125	-45.48	RMS	35.7	11.8	0	-35.7	-33.68	-27	-6.68	-	-	255	126	V
			7.125	-28.88	Pk	35.7	11.8	0	-35.7	-17.08	-	-	-7	-10.08	255	126	V
			7.125068	-27.83	Pk	35.7	11.8	0	-35.7	-16.03	-	-	-7	-9.03	255	126	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.9. 802.11be SISO SU MODE IN UNII-8 BAND – BANDEDGE

UNII-8 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading ERP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (SU Mode)	7095	6	7.125000	-40.69	Pk	35.6	11.8	0.00	-33.85	-27.14	-	-	-7	-20.14	283	173	H
			7.486969	-49.09	Pk	35.6	11.8	0.00	-33.73	-35.42	-	-	-21.2	-14.22	283	173	H
			7.125000	-57.09	RMS	35.6	11.8	0.00	-33.85	-43.54	-27	-16.54	-	-	283	173	H
			7.517302	-61.12	RMS	35.6	11.8	0.00	-33.74	-47.46	-41.2	-6.26	-	-	283	173	H
			7.125000	-42.29	Pk	35.6	11.8	0.00	-33.85	-28.74	-	-	-7	-21.74	253	208	V
			7.380413	-49.44	Pk	35.6	11.8	0.00	-33.85	-35.89	-	-	-21.2	-14.69	253	208	V
			7.125000	-57.30	RMS	35.6	11.8	0.00	-33.85	-43.75	-27	-16.75	-	-	253	208	V
			7.409191	-61.26	RMS	35.6	11.8	0.00	-33.78	-47.64	-41.2	-6.44	-	-	253	208	V
		16	7.125000	-42.12	Pk	35.6	11.8	0.00	-33.85	-28.57	-	-	-7	-21.57	358	335	H
			7.430346	-49.07	Pk	35.6	11.8	0.00	-33.81	-35.48	-	-	-21.2	-14.28	358	335	H
			7.125000	-57.62	RMS	35.6	11.8	0.00	-33.85	-44.07	-27	-17.07	-	-	358	335	H
			7.402813	-61.23	RMS	35.6	11.8	0.00	-33.84	-47.67	-41.2	-6.47	-	-	358	335	H
			7.125000	-49.10	Pk	35.6	11.8	0.00	-33.85	-35.55	-	-	-7	-28.55	333	200	V
			7.417202	-49.16	Pk	35.6	11.8	0.00	-33.83	-35.59	-	-	-21.2	-14.39	333	200	V
			7.125000	-61.32	RMS	35.6	11.8	0.00	-33.85	-47.77	-27	-20.77	-	-	333	200	V
			7.478491	-61.33	RMS	35.6	11.8	0.00	-33.78	-47.71	-41.2	-6.51	-	-	333	200	V
EHT40 (SU Mode)	7085	6	7.125000	-28.90	Pk	35.6	11.8	0.00	-33.85	-15.35	-	-	-7	-8.35	275	154	H
			7.126001	-28.30	Pk	35.6	11.8	0.00	-33.84	-14.74	-	-	-7	-7.74	275	154	H
			7.125000	-43.24	RMS	35.6	11.8	0.00	-33.85	-29.69	-27	-2.69	-	-	275	154	H
			7.125145	-43.15	RMS	35.6	11.8	0.00	-33.85	-29.60	-27	-2.60	-	-	275	154	H
			7.125000	-28.51	Pk	35.6	11.8	0.00	-33.85	-14.96	-	-	-7	-7.96	256	203	V
			7.125456	-28.28	Pk	35.6	11.8	0.00	-33.85	-14.73	-	-	-7	-7.73	256	203	V
			7.125000	-44.32	RMS	35.6	11.8	0.00	-33.85	-30.77	-27	-3.77	-	-	256	203	V
			7.125223	-43.55	RMS	35.6	11.8	0.00	-33.85	-30.00	-27	-3.00	-	-	256	203	V
		16	7.125000	-37.28	Pk	35.6	11.8	0.00	-33.85	-23.73	-	-	-7	-16.73	267	150	H
			7.507424	-49.05	Pk	35.6	11.8	0.00	-33.75	-35.40	-	-	-21.2	-14.20	267	150	H
			7.125000	-50.77	RMS	35.6	11.8	0.00	-33.85	-37.22	-27	-10.22	-	-	267	150	H
			7.396668	-61.07	RMS	35.6	11.8	0.00	-33.79	-47.46	-41.2	-6.26	-	-	267	150	H
			7.125000	-46.26	Pk	35.6	11.8	0.00	-33.85	-32.71	-	-	-7	-25.71	267	150	V
			7.310801	-49.29	Pk	35.6	11.8	0.00	-33.95	-35.84	-	-	-21.2	-14.64	267	150	V
			7.125000	-59.07	RMS	35.6	11.8	0.00	-33.85	-45.52	-27	-18.52	-	-	267	150	V
			7.458191	-61.28	RMS	35.6	11.8	0.00	-33.84	-47.72	-41.2	-6.52	-	-	267	150	V
EHT80 (SU Mode)	7025	6	7.125	-43.21	Pk	35.6	11.8	0	-33.85	-29.66	-	-	-7	-22.66	279	184	H
			7.348757	-48.53	Pk	35.6	11.8	0	-33.96	-35.09	-	-	-21.2	-13.89	279	184	H
			7.125	-56.87	RMS	35.6	11.8	0	-33.85	-43.32	-27	-16.32	-	-	279	184	H
			7.489457	-61.11	RMS	35.6	11.8	0	-33.74	-47.45	-41.2	-6.25	-	-	279	184	H
			7.125	-41.72	Pk	35.6	11.8	0	-33.85	-28.17	-	-	-7	-21.17	251	238	V
			7.523369	-49.35	Pk	35.6	11.8	0	-33.76	-35.71	-	-	-21.2	-14.51	251	238	V
			7.125	-56.25	RMS	35.6	11.8	0	-33.85	-42.7	-27	-15.7	-	-	251	238	V
			7.49078	-61.21	RMS	35.6	11.8	0	-33.76	-47.57	-41.2	-6.37	-	-	251	238	V
		16	7.125	-38.78	Pk	35.6	11.8	0	-33.85	-25.23	-	-	-7	-18.23	259	323	H
			7.512402	-49.31	Pk	35.6	11.8	0	-33.71	-35.62	-	-	-21.2	-14.42	259	323	H
			7.125	-53.11	RMS	35.6	11.8	0	-33.85	-39.56	-27	-12.56	-	-	259	323	H
			7.395191	-61.23	RMS	35.6	11.8	0	-33.82	-47.65	-41.2	-6.45	-	-	259	323	H
			7.125	-42.92	Pk	35.6	11.8	0	-33.85	-29.37	-	-	-7	-22.37	161	329	V
			7.513569	-48.94	Pk	35.6	11.8	0	-33.7	-35.24	-	-	-21.2	-14.04	161	329	V
			7.125	-56.86	RMS	35.6	11.8	0	-33.85	-43.31	-27	-16.31	-	-	161	329	V
			7.414868	-61.16	RMS	35.6	11.8	0	-33.81	-47.57	-41.2	-6.37	-	-	161	329	V
EHT160 (SU Mode)	6985	6	7.125	-32.89	Pk	35.6	11.8	0	-33.85	-19.34	-	-	-7	-12.34	314	223	H
			7.132068	-30.85	Pk	35.6	11.8	0	-33.8	-17.25	-	-	-7	-10.25	314	223	H
			7.125	-46.39	RMS	35.6	11.8	0.14	-33.85	-32.7	-27	-5.7	-	-	314	223	H
			7.132612	-44.07	RMS	35.6	11.8	0.14	-33.79	-30.32	-27	-3.32	-	-	314	223	H
			7.125	-33.75	Pk	35.6	11.8	0	-33.85	-20.2	-	-	-7	-13.2	253	235	V
			7.132223	-29.38	Pk	35.6	11.8	0	-33.8	-15.78	-	-	-7	-8.78	253	235	V
			7.125	-44.65	RMS	35.6	11.8	0.14	-33.85	-30.96	-27	-3.96	-	-	253	235	V
			7.132612	-43.6	RMS	35.6	11.8	0.14	-33.79	-29.85	-27	-2.85	-	-	253	235	V
		16	7.125	-33.37	Pk	35.6	11.8	0	-33.85	-19.82	-	-	-7	-12.82	2	270	H
			7.125145	-30.98	Pk	35.6	11.8	0	-33.85	-17.43	-	-	-7	-10.43	2	270	H
			7.125	-44.84	RMS	35.6	11.8	0.14	-33.85	-31.15	-27	-4.15	-	-	2	270	H
			7.127868	-44	RMS	35.6	11.8	0.14	-33.8	-30.26	-27	-3.26	-	-	2	270	H
			7.125	-39.28	Pk	35.6	11.8	0	-33.85	-25.73	-	-	-7	-18.73	256	317	V
			7.284357	-49	Pk	35.6	11.8	0	-33.95	-35.55	-	-	-21.2	-14.35	256	317	V
			7.125	-50.61	RMS	35.6	11.8	0.14	-33.85	-36.92	-27	-9.92	-	-	256	317	V
			7.257368	-60.94	RMS	35.6	11.8	0.14	-33.9	-47.3	-41.2	-6.1	-	-	256	317	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.10. 802.11be SISO RU MODE IN UNII-8 BAND - BANDEDGE

UNII-8 (SISO)	Channel Frequency MHz	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (26T RU8)	7095	6	7.125000	-50.45	Pk	35.7	11.8	0.00	-36.30	-39.25	-	-	-7	-32.25	210	171	H
			* 7.401491	-47.66	Pk	35.6	11.8	0.00	-36.35	-36.61	-	-	-21.2	-15.41	210	171	H
			7.125000	-61.02	RMS	35.7	11.8	0.00	-36.30	-49.82	-27	-22.82	-	-	210	171	H
			* 7.519713	-59.88	RMS	35.6	11.8	0.00	-36.30	-48.78	-41.2	-7.58	-	-	210	171	H
			7.125000	-49.76	Pk	35.7	11.8	0.00	-36.30	-38.56	-	-	-7	-31.56	196	198	V
			* 7.342146	-48.29	Pk	35.6	11.8	0.00	-36.10	-36.99	-	-	-21.2	-15.79	196	198	V
			7.125000	-61.14	RMS	35.7	11.8	0.00	-36.30	-49.94	-27	-22.94	-	-	196	198	V
			* 7.505713	-59.91	RMS	35.6	11.8	0.00	-36.30	-48.81	-41.2	-7.61	-	-	196	198	V
		16	7.125000	-49.67	Pk	35.7	11.8	0.00	-37.80	-39.97	-	-	-7	-32.97	357	231	H
			7.338335	-47.12	Pk	35.6	11.8	0.00	-38.00	-37.72	-	-	-21.2	-16.52	357	231	H
			7.125000	-60.16	RMS	35.7	11.8	0.00	-37.80	-50.46	-27	-23.46	-	-	357	231	H
			7.521035	-59.20	RMS	35.7	11.8	0.00	-37.90	-49.60	-41.2	-8.40	-	-	357	231	H
			7.125000	-49.30	Pk	35.7	11.8	0.00	-37.80	-39.60	-	-	-7	-32.60	12	177	V
			7.398224	-45.95	Pk	35.6	11.8	0.00	-38.28	-36.83	-	-	-21.2	-15.63	12	177	V
			7.125000	-60.48	RMS	35.7	11.8	0.00	-37.80	-50.78	-27	-23.78	-	-	12	177	V
			7.520102	-59.25	RMS	35.7	11.8	0.00	-37.81	-49.56	-41.2	-8.36	-	-	12	177	V
EHT20 (52+26T RU72)	7095	6	7.125000	-50.93	Pk	35.6	11.8	0.00	-33.85	-37.38	-	-	-7	-30.38	103	112	H
			7.432057	-49.03	Pk	35.6	11.8	0.00	-33.85	-35.48	-	-	-21.2	-14.28	103	112	H
			7.125000	-62.52	RMS	35.6	11.8	0.00	-33.85	-48.97	-27	-21.97	-	-	103	112	H
			7.380646	-61.28	RMS	35.6	11.8	0.00	-33.85	-47.73	-41.2	-6.53	-	-	103	112	H
			7.125000	-51.96	Pk	35.6	11.8	0.00	-33.85	-38.41	-	-	-7	-31.41	66	220	V
			7.423113	-49.32	Pk	35.6	11.8	0.00	-33.74	-35.66	-	-	-21.2	-14.46	66	220	V
			7.125000	-61.95	RMS	35.6	11.8	0.00	-33.85	-48.40	-27	-21.40	-	-	66	220	V
			7.449868	-61.23	RMS	35.6	11.8	0.00	-33.87	-47.70	-41.2	-6.50	-	-	66	220	V
		16	7.125000	-48.29	Pk	35.7	11.8	0.00	-37.80	-38.59	-	-	-7	-31.59	357	231	H
			7.364390	-47.14	Pk	35.6	11.8	0.00	-37.84	-37.58	-	-	-21.2	-16.38	357	231	H
			7.125000	-60.45	RMS	35.7	11.8	0.00	-37.80	-50.75	-27	-23.75	-	-	357	231	H
			7.520180	-59.02	RMS	35.7	11.8	0.00	-37.82	-49.34	-41.2	-8.14	-	-	357	231	H
			7.125000	-50.61	Pk	35.7	11.8	0.00	-37.80	-40.91	-	-	-7	-33.91	13	177	V
			7.270123	-47.57	Pk	35.6	11.8	0.00	-37.40	-37.57	-	-	-21.2	-16.37	13	177	V
			7.125000	-60.22	RMS	35.7	11.8	0.00	-37.80	-50.52	-27	-23.52	-	-	13	177	V
			7.295868	-59.03	RMS	35.6	11.8	0.00	-37.71	-49.34	-41.2	-8.14	-	-	13	177	V
EHT80 (484+242 T RU90)	7025	6	7.125000	-50.52	Pk	35.6	11.8	0.00	-33.86	-36.98	-	-	-7	-29.98	213	143	H
			* 7.384146	-48.98	Pk	35.6	11.8	0.00	-33.50	-35.08	-	-	-21.2	-13.88	213	143	H
			7.125000	-61.90	RMS	35.6	11.8	0.00	-33.86	-48.36	-27	-21.36	-	-	213	143	H
			* 7.518624	-61.76	RMS	35.7	11.8	0.00	-32.99	-47.25	-41.2	-6.05	-	-	213	143	H
			7.125000	-48.21	Pk	35.6	11.8	0.00	-33.86	-34.67	-	-	-7	-27.67	213	211	V
			* 7.517380	-49.20	Pk	35.7	11.8	0.00	-32.99	-34.69	-	-	-21.2	-13.49	213	211	V
			7.125000	-60.45	RMS	35.6	11.8	0.00	-33.86	-46.91	-27	-19.91	-	-	213	211	V
			* 7.511702	-61.58	RMS	35.7	11.8	0.00	-33.01	-47.09	-41.2	-5.89	-	-	213	211	V
		16	7.125000	-50.21	Pk	35.4	11.8	0.00	-35.80	-38.81	-	-	-7	-31.81	312	264	H
			7.502135	-48.32	Pk	35.5	11.8	0.00	-35.29	-36.31	-	-	-21.2	-15.11	312	264	H
			7.125000	-61.24	RMS	35.4	11.8	0.00	-35.80	-49.84	-27	-22.84	-	-	312	264	H
			7.517846	-60.38	RMS	35.5	11.8	0.00	-35.25	-48.33	-41.2	-7.13	-	-	312	264	H
			7.125000	-50.30	Pk	35.4	11.8	0.00	-35.80	-38.90	-	-	-7	-31.90	240	292	V
			7.393557	-47.76	Pk	35.4	11.8	0.00	-35.42	-35.98	-	-	-21.2	-14.78	240	292	V
			7.125000	-61.13	RMS	35.4	11.8	0.00	-35.80	-49.73	-27	-22.73	-	-	240	292	V
			7.399391	-60.19	RMS	35.4	11.8	0.00	-35.43	-48.42	-41.2	-7.22	-	-	240	292	V
EHT160 (996+484 T RU94)	6985	6	7.125000	-42.20	Pk	35.7	11.8	0.00	-36.30	-31.00	-	-	-7	-24.00	31	155	H
			* 7.349146	-48.55	Pk	35.6	11.8	0.00	-36.20	-37.35	-	-	-21.2	-16.15	31	155	H
			7.125000	-53.50	RMS	35.7	11.8	0.00	-36.30	-42.30	-27	-15.30	-	-	31	155	H
			* 7.475691	-59.72	RMS	35.6	11.8	0.00	-36.40	-48.72	-41.2	-7.52	-	-	31	155	H
			7.125000	-38.53	Pk	35.7	11.8	0.00	-36.30	-27.33	-	-	-7	-20.33	24	237	V
			7.132612	-32.48	Pk	35.7	11.8	0.00	-36.40	-21.38	-	-	-7	-14.38	24	237	V
			7.125000	-51.61	RMS	35.7	11.8	0.00	-36.30	-40.41	-27	-13.41	-	-	24	237	V
			* 7.270979	-59.94	RMS	35.7	11.8	0.00	-36.20	-48.64	-41.2	-7.44	-	-	24	237	V
		16	7.125000	-43.88	Pk	35.7	11.8	0.00	-36.81	-33.19	-	-	-7	-26.19	261	229	H
			7.388891	-46.22	Pk	35.7	11.8	0.00	-36.69	-35.41	-	-	-21.2	-14.21	261	229	H
			7.125000	-56.77	RMS	35.7	11.8	0.00	-36.81	-46.08	-27	-19.08	-	-	261	229	H
			7.415179	-58.62	RMS	35.7	11.8	0.00	-36.63	-47.75	-41.2	-6.55	-	-	261	229	H
			7.125000	-43.62	Pk	35.7	11.8	0.00	-36.81	-32.93	-	-	-7	-25.93	25	191	V
			7.382590	-46.67	Pk	35.8	11.8	0.00	-36.71	-35.78	-	-	-21.2	-14.58	25	191	V
			7.125000	-55.35	RMS	35.7	11.8	0.00	-36.81	-44.66	-27	-17.66	-	-	25	191	V
			7.387568	-58.76	RMS	35.7	11.8	0.00	-36.68	-47.94	-41.2	-6.74	-	-	25	191	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.11. 802.11a MIMO MODE IN UNII-8 BAND – BANDEDGE

UNII-8 (MIMO CDD)	Channel Frequency MHz	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11a	7115	6+16	7.125000	-30.36	Pk	35.6	11.8	0.00	-33.85	-16.81	-	-	-7	-9.81	285	132	H
			7.125068	-31.02	Pk	35.6	11.8	0.00	-33.85	-17.47	-	-	-7	-10.47	285	132	H
			7.125000	-46.47	RMS	35.6	11.8	0.00	-33.85	-32.92	-27	-5.92	-	-	285	132	H
			* 7.487435	-61.04	RMS	35.6	11.8	0.00	-33.73	-47.37	-41.2	-6.17	-	-	285	132	H
			7.125000	-28.02	Pk	35.6	11.8	0.00	-33.85	-14.47	-	-	-7	-7.47	238	112	V
			7.125068	-28.76	Pk	35.6	11.8	0.00	-33.85	-15.21	-	-	-7	-8.21	238	112	V
			7.125000	-43.47	RMS	35.6	11.8	0.00	-33.85	-29.92	-27	-2.92	-	-	238	112	V
			7.125068	-44.62	RMS	35.6	11.8	0.00	-33.85	-31.07	-27	-4.07	-	-	238	112	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.12. 802.11be MIMO SU MODE IN UNII-8 BAND – BANDEDGE

UNII-8 (MIMO CDD)	Channel Frequency MHz	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (SU Mode)	7095	6+16	7.125000	-40.11	Pk	35.6	11.8	0.00	-33.85	-26.56	-	-	-7	-19.56	352	177	H
			7.388968	-48.90	Pk	35.6	11.8	0.00	-33.90	-35.40	-	-	-21.2	-14.20	352	177	H
			7.125000	-57.49	RMS	35.6	11.8	0.00	-33.85	-43.94	-27	-16.94	-	-	352	177	H
			7.494124	-61.31	RMS	35.6	11.8	0.00	-33.74	-47.65	-41.2	-6.45	-	-	352	177	H
			7.125000	-45.78	Pk	35.6	11.8	0.00	-33.85	-32.23	-	-	-7	-25.23	35	208	V
			7.489224	-48.92	Pk	35.6	11.8	0.00	-33.74	-35.26	-	-	-21.2	-14.06	35	208	V
			7.125000	-60.02	RMS	35.6	11.8	0.00	-33.85	-46.47	-27	-19.47	-	-	35	208	V
			7.512169	-61.40	RMS	35.6	11.8	0.00	-33.72	-47.72	-41.2	-6.52	-	-	35	208	V
EHT40 (SU Mode)	7085	6+16	7.125000	-30.62	Pk	35.6	11.8	0.00	-33.85	-17.07	-	-	-7	-10.07	65	284	H
			7.126779	-27.18	Pk	35.6	11.8	0.00	-33.82	-13.60	-	-	-7	-6.60	65	284	H
			7.125000	-43.85	RMS	35.6	11.8	0.00	-33.85	-30.30	-27	-3.30	-	-	65	284	H
			7.126079	-43.52	RMS	35.6	11.8	0.00	-33.84	-29.96	-27	-2.96	-	-	65	284	H
			7.125000	-33.55	Pk	35.6	11.8	0.00	-33.85	-20.00	-	-	-7	-13.00	253	309	V
			7.129034	-33.06	Pk	35.6	11.8	0.00	-33.82	-19.48	-	-	-7	-12.48	253	309	V
			7.125000	-47.01	RMS	35.6	11.8	0.00	-33.85	-33.46	-27	-6.46	-	-	253	309	V
			7.358790	-61.01	RMS	35.6	11.8	0.00	-33.99	-47.60	-41.2	-6.40	-	-	253	309	V
EHT80 (SU Mode)	7025	6+16	7.125000	-38.84	Pk	35.6	11.8	0.00	-33.85	-25.29	-	-	-7	-18.29	7	286	H
			7.438824	-49.15	Pk	35.6	11.8	0.00	-33.77	-35.52	-	-	-21.2	-14.32	7	286	H
			7.125000	-52.17	RMS	35.6	11.8	0.00	-33.85	-38.62	-27	-11.62	-	-	7	286	H
			7.369679	-60.99	RMS	35.6	11.8	0.00	-33.95	-47.54	-41.2	-6.34	-	-	7	286	H
			7.125000	-44.08	Pk	35.6	11.8	0.00	-33.85	-30.53	-	-	-7	-23.53	254	360	V
			7.354279	-48.86	Pk	35.6	11.8	0.00	-33.95	-35.41	-	-	-21.2	-14.21	254	360	V
			7.125000	-56.17	RMS	35.6	11.8	0.00	-33.85	-42.62	-27	-15.62	-	-	254	360	V
			7.366335	-61.15	RMS	35.6	11.8	0.00	-33.91	-47.66	-41.2	-6.46	-	-	254	360	V
EHT160 (SU Mode)	6985	6+16	7.125000	-36.80	Pk	35.7	11.8	0.00	-35.70	-25.00	-	-	-7	-18.00	332	257	H
			7.125000	-48.92	RMS	35.7	11.8	0.00	-35.70	-37.12	-27	-10.12	-	-	332	257	H
			7.127401	-41.45	RMS	35.7	11.8	0.00	-35.66	-29.61	-27	-2.61	-	-	332	257	H
			7.136501	-29.29	Pk	35.7	11.8	0.00	-35.65	-17.44	-	-	-7	-10.44	332	257	H
			* 7.386946	-48.56	Pk	35.7	11.8	0.00	-35.31	-36.37	-	-	-21.2	-15.17	13	209	V
			* 7.396824	-60.31	RMS	35.7	11.8	0.00	-35.32	-48.13	-41.2	-6.93	-	-	13	209	V
			7.125000	-43.43	Pk	35.7	11.8	0.00	-35.70	-31.63	-	-	-7	-24.63	13	209	V
			7.125000	-53.93	RMS	35.7	11.8	0.00	-35.70	-42.13	-27	-15.13	-	-	13	209	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.13. 802.11be MIMO PARTIAL RU MODE IN UNII-8 BAND – BANDEDGE

UNII-8 (MIMO CDD)	Channel Frequency MHz	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (26T RU8)	7095	6+16	7.125000	-49.13	Pk	35.7	11.8	0.00	-36.30	-37.93	-	-	-7	-30.93	70	335	H
			* 7.497313	-47.56	Pk	35.6	11.8	0.00	-36.40	-36.56	-	-	-21.2	-15.36	70	335	H
			7.125000	-60.88	RMS	35.7	11.8	0.00	-36.30	-49.68	-27	-22.68	-	-	70	335	H
			* 7.518158	-59.77	RMS	35.6	11.8	0.00	-36.30	-48.67	-41.2	-7.47	-	-	70	335	H
			7.125000	-51.09	Pk	35.7	11.8	0.00	-36.30	-39.89	-	-	-7	-32.89	150	259	V
			* 7.476935	-47.73	Pk	35.6	11.8	0.00	-36.40	-36.73	-	-	-21.2	-15.53	150	259	V
			7.125000	-61.29	RMS	35.7	11.8	0.00	-36.30	-50.09	-27	-23.09	-	-	150	259	V
			* 7.513646	-59.96	RMS	35.6	11.8	0.00	-36.30	-48.86	-41.2	-7.66	-	-	150	259	V
			* 7.478902	-47.86	Pk	35.7	11.8	0.00	-35.50	-35.86	-	-	-21.2	-14.66	175	238	H
			* 7.376835	-60.24	RMS	35.7	11.8	0.00	-35.32	-48.06	-41.2	-6.86	-	-	175	238	H
EHT20 (52+26T RU72)	7095	6+16	7.125000	-50.33	Pk	35.7	11.8	0.00	-35.70	-38.53	-	-	-7	-31.53	175	238	H
			7.125	-61.28	RMS	35.7	11.8	0.00	-35.70	-49.48	-27	-22.48	-	-	175	238	H
			* 7.278679	-47.97	Pk	35.7	11.8	0.00	-35.53	-36.00	-	-	-21.2	-14.80	171	111	V
			* 7.487824	-60.30	RMS	35.7	11.8	0.00	-35.52	-48.32	-41.2	-7.12	-	-	171	111	V
			7.125000	-50.98	Pk	35.7	11.8	0.00	-35.70	-39.18	-	-	-7	-32.18	171	111	V
			7.125	-60.93	RMS	35.7	11.8	0.00	-35.70	-49.13	-27	-22.13	-	-	171	111	V
			7.125000	-51.14	Pk	35.6	11.8	0.00	-33.86	-37.60	-	-	-7	-30.60	230	244	H
			* 7.418213	-49.43	Pk	35.6	11.8	0.00	-33.37	-35.40	-	-	-21.2	-14.20	230	244	H
			7.125000	-62.23	RMS	35.6	11.8	0.00	-33.86	-48.69	-27	-21.69	-	-	230	244	H
			* 7.514035	-61.77	RMS	35.7	11.8	0.00	-33.00	-47.27	-41.2	-6.07	-	-	230	244	H
EHT80 (484+242T RU90)	7025	6+16	7.125000	-51.51	Pk	35.6	11.8	0.00	-33.86	-37.97	-	-	-7	-30.97	145	375	V
			* 7.501902	-49.69	Pk	35.6	11.8	0.00	-33.05	-35.34	-	-	-21.2	-14.14	145	375	V
			7.125000	-62.12	RMS	35.6	11.8	0.00	-33.86	-48.58	-27	-21.58	-	-	145	375	V
			* 7.524458	-61.68	RMS	35.7	11.8	0.00	-32.96	-47.14	-41.2	-5.94	-	-	145	375	V
			7.125000	-43.88	Pk	35.7	11.8	0.00	-36.81	-33.19	-	-	-7	-26.19	261	229	H
			7.388891	-46.22	Pk	35.7	11.8	0.00	-36.69	-35.41	-	-	-21.2	-14.21	261	229	H
			7.125000	-56.77	RMS	35.7	11.8	0.00	-36.81	-46.08	-27	-19.08	-	-	261	229	H
			7.415179	-58.62	RMS	35.7	11.8	0.00	-36.63	-47.75	-41.2	-6.55	-	-	261	229	H
			7.125000	-43.62	Pk	35.7	11.8	0.00	-36.81	-32.93	-	-	-7	-25.93	25	191	V
			7.38259	-46.67	Pk	35.8	11.8	0.00	-36.71	-35.78	-	-	-21.2	-14.58	25	191	V
EHT160 (996+484T RU94)	6985	6+16	7.125000	-55.35	RMS	35.7	11.8	0.00	-36.81	-44.66	-27	-17.66	-	-	25	191	V
			7.387568	-58.76	RMS	35.7	11.8	0.00	-36.68	-47.94	-41.2	-6.74	-	-	25	191	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector


RMS - RMS detection

WORST-CASE BANDEDGE (HIGH CHANNEL)

802.11be EHT40/ 227 & 7085 / 1TX / ANT 6 / SU


HORIZONTAL/VERTICAL RESULT

HORIZONTAL RESULT

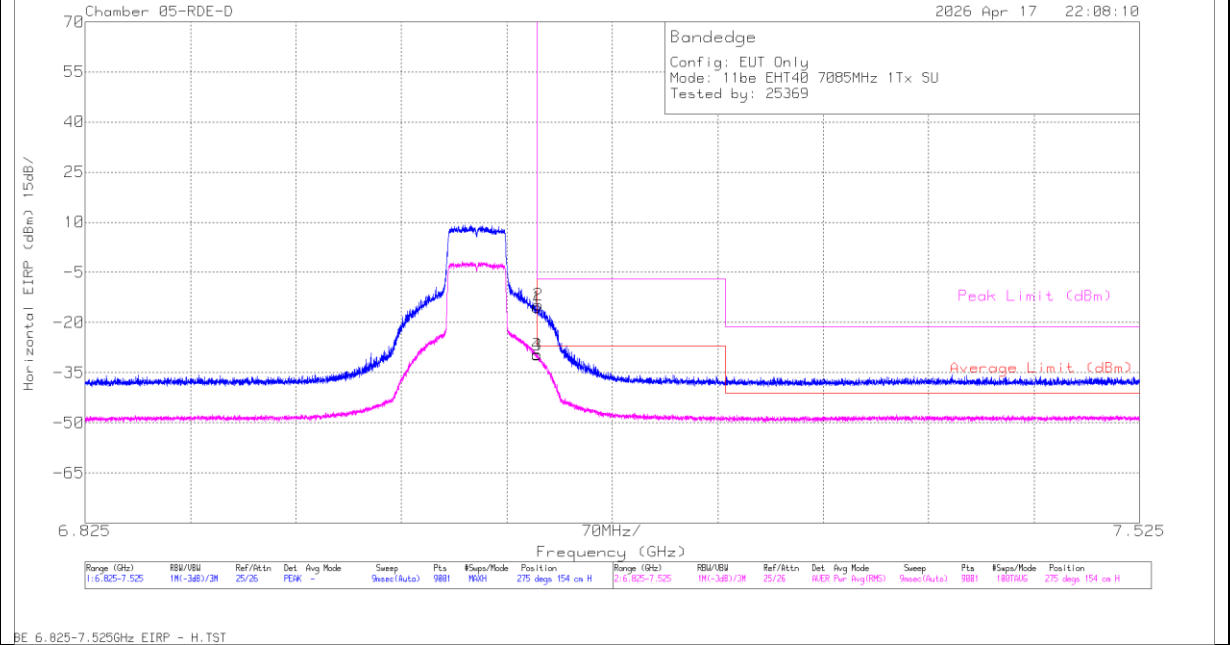

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	81887 ACF (dB)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.125	-28.9	Pk	35.6	11.8	0	-33.85	-15.35	-	-	-7	-8.35	275	154	H
2	7.126001	-28.3	Pk	35.6	11.8	0	-33.84	-14.74	-	-	-7	-7.74	275	154	H
3	7.125	-43.24	RMS	35.6	11.8	0	-33.85	-29.69	-27	-2.69	-	-	275	154	H
4	7.125145	-43.15	RMS	35.6	11.8	0	-33.85	-29.6	-27	-2.6	-	-	275	154	H

Pk - Peak detector
RMS - RMS detection

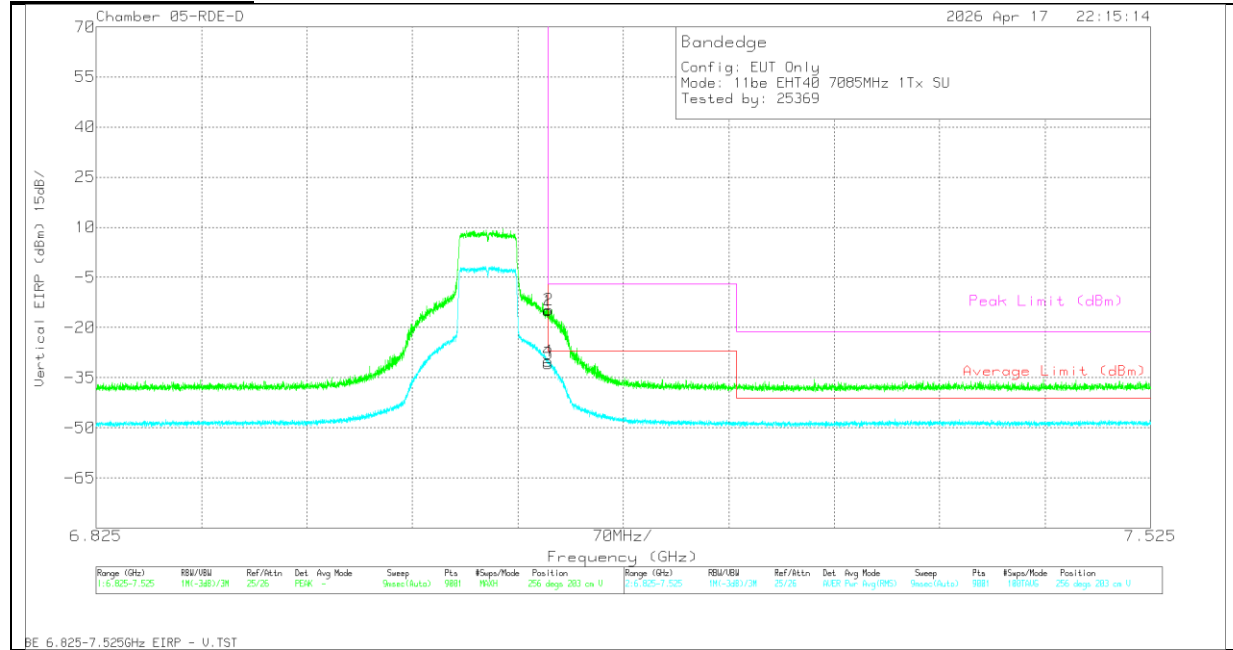VERTICAL RESULT

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	81887 ACF (dB)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.125	-28.51	Pk	35.6	11.8	0	-33.85	-14.96	-	-	-7	-7.96	256	203	V
2	7.125456	-28.28	Pk	35.6	11.8	0	-33.85	-14.73	-	-	-7	-7.73	256	203	V
3	7.125	-44.32	RMS	35.6	11.8	0	-33.85	-30.77	-27	-3.77	-	-	256	203	V
4	7.125223	-43.55	RMS	35.6	11.8	0	-33.85	-30	-27	-3	-	-	256	203	V

Pk - Peak detector

RMS - RMS detection

1.1.14. 802.11a MIMO MODE IN UNII-8 BAND – SPURIOUS EMISSIONS**20MHz**

UNII-8 (MIMO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11a mode	7115	6 + 16	* 2.386387	46.26	ADR	32.1	-47	0	31.36	54	-22.64	-	-	1	101	H
			3.552814	55.47	PK-U	32.9	-45.1	0	43.27	-	-	88.2	-44.93	1	101	H
			3.571537	43.63	ADR	33	-45.25	0	31.38	68.2	-36.82	-	-	1	101	H
			* 2.380041	57.53	PK-U	32.1	-47.1	0	42.53	-	-	74	-31.47	1	200	V
			* 2.387351	45.63	ADR	32.1	-47	0	30.73	54	-23.27	-	-	1	200	V
			3.547107	55.43	PK-U	32.9	-45.1	0	43.23	-	-	88.2	-44.97	1	101	V
			3.560314	43.39	ADR	32.9	-45.17	0	31.12	68.2	-37.08	-	-	1	101	V
			2.390098	57.63	PK-U	32.1	-46.99	0	42.74	-	-	88.2	-45.46	1	101	H
			14.224333	43.15	ADR	39	-42.5	0	39.65	68.2	-28.55	-	-	1	200	H
			14.233224	43.07	ADR	39	-42.3	0	39.77	68.2	-28.43	-	-	1	101	V
			14.244627	54.67	PK-U	39	-42.26	0	51.41	-	-	88.2	-36.79	1	101	V
			14.245015	54.75	PK-U	39	-42.3	0	51.45	-	-	88.2	-36.75	1	200	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.1.15. 802.11be MIMO MODE IN UNII-8 BAND – SPURIOUS EMISSIONS

20MHz

UNII-8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity	
11be (SU Mode / Highest Power)	6895	6+16	* 1.440898	62.22	PK-U	28.3	-49.40	0.00	41.12	-	-	74	-32.88	0	101	H	
			* 1.440631	49.80	ADR	28.3	-49.40	0.00	28.70	54	-25.3	-	-	0	101	H	
			* 2.320977	60.77	PK-U	32.0	-49.93	0.00	42.84	-	-	74	-31.16	0	101	H	
			* 2.335700	49.22	ADR	32.1	-49.98	0.00	31.34	54	-22.66	-	-	0	101	H	
			* 1.441429	60.94	PK-U	28.3	-49.40	0.00	39.84	-	-	74	-34.16	0	199	V	
			* 1.439447	49.62	ADR	28.3	-49.39	0.00	28.53	54	-25.47	-	-	0	199	V	
			* 2.337332	61.37	PK-U	32.1	-49.98	0.00	43.49	-	-	74	-30.51	0	199	V	
			* 2.338741	49.13	ADR	32.1	-49.97	0.00	31.26	54	-22.74	-	-	0	199	V	
			* 12.023250	55.14	PK-U	39.0	-43.29	0.00	50.85	-	-	74	-23.15	0	199	H	
			* 12.020534	43.34	ADR	39.0	-43.36	0.00	38.98	54	-15.02	-	-	0	199	H	
			* 12.019846	54.79	PK-U	39.0	-43.34	0.00	50.45	-	-	74	-23.55	0	199	V	
			* 12.020902	43.24	ADR	39.0	-43.38	0.00	38.86	54	-15.14	-	-	0	199	V	
			* 1.445347	61.24	PK-U	28.2	-49.42	0.00	40.02	-	-	74	-33.98	0	200	H	
			* 1.443854	49.78	ADR	28.2	-49.44	0.00	28.54	54	-25.46	-	-	0	200	H	
			* 4.083496	57.61	PK-U	33.4	-47.51	0.00	43.50	-	-	74	-30.5	0	101	H	
	6995		* 4.071204	45.76	ADR	33.4	-47.36	0.00	31.80	54	-22.2	-	-	0	101	H	
			* 1.435525	61.21	PK-U	28.3	-49.38	0.00	40.13	-	-	74	-33.87	0	101	V	
			* 1.444057	50.09	ADR	28.2	-49.44	0.00	28.85	54	-25.15	-	-	0	101	V	
			* 4.090069	57.58	PK-U	33.4	-47.56	0.00	43.42	-	-	74	-30.58	0	200	V	
			* 4.077631	45.98	ADR	33.4	-47.53	0.00	31.85	54	-22.15	-	-	0	200	V	
			* 12.348443	54.15	PK-U	38.7	-43.33	0.00	49.52	-	-	74	-24.48	0	101	H	
			* 12.342640	41.84	ADR	38.8	-43.32	0.00	37.32	54	-16.68	-	-	0	101	H	
			* 12.348395	53.40	PK-U	38.7	-43.33	0.00	48.77	-	-	74	-25.23	0	101	V	
			* 12.345771	41.63	ADR	38.7	-43.34	0.00	36.99	54	-17.01	-	-	0	101	V	
			* 1.392198	61.43	PK-U	28.6	-49.67	0.00	40.36	-	-	74	-33.64	0	200	H	
			* 1.389425	50.34	ADR	28.6	-49.68	0.00	29.26	54	-24.74	-	-	0	200	H	
			* 4.348110	58.60	PK-U	33.9	-48.11	0.00	44.39	-	-	74	-29.61	0	200	H	
			* 4.381848	46.75	ADR	33.9	-48.02	0.00	32.63	54	-21.37	-	-	0	200	H	
			* 1.386149	61.92	PK-U	28.6	-49.69	0.00	40.83	-	-	74	-33.17	0	200	V	
			7095	* 1.391611	50.10	ADR	28.6	-49.67	0.00	29.03	54	-24.97	-	-	0	200	V
	* 4.354396			58.75	PK-U	33.9	-48.17	0.00	44.48	-	-	74	-29.52	0	101	V	
	* 4.385259			46.77	ADR	33.9	-48.05	0.00	32.62	54	-21.38	-	-	0	101	V	
	* 12.602151			55.08	PK-U	38.9	-43.53	0.00	50.45	-	-	74	-23.55	0	200	H	
	* 12.597703			43.18	ADR	38.9	-43.43	0.00	38.65	54	-15.35	-	-	0	200	H	
	* 12.627456			55.08	PK-U	39.0	-43.56	0.00	50.52	-	-	74	-23.48	0	200	V	
	* 12.599007			43.05	ADR	38.9	-43.42	0.00	38.53	54	-15.47	-	-	0	200	V	
	* 2.775704			60.45	PK-U	32.4	-49.4	0	43.45	-	-	74	-30.55	0	101	V	
	* 2.777171			49.1	ADR	32.4	-49.45	0	32.05	54	-21.95	-	-	0	101	V	
	* 2.777540			49.05	ADR	32.4	-49.56	0	31.89	54	-22.11	-	-	0	101	H	
	* 2.786463			60.73	PK-U	32.4	-49.27	0	43.86	-	-	74	-30.14	0	101	H	
	* 3.993666			59.17	PK-U	33.5	-48	0	44.67	-	-	74	-29.33	0	101	V	
	* 3.997146			47.15	ADR	33.5	-48.29	0	32.36	54	-21.64	-	-	0	101	V	
	* 3.999075			59	PK-U	33.5	-47.72	0	44.78	-	-	74	-29.22	0	101	H	
	11be (Partial RU Mode / Highest PSD)			EHT20 6895 (26T RU0)	* 4.008514	47.33	ADR	33.5	-48.05	0	32.78	54	-21.22	-	-	0	101
			* 11.072886		46.92	ADR	37.9	-44.83	0	39.99	54	-14.01	-	-	0	101	V
			* 11.083633		58.83	PK-U	37.9	-44.27	0	52.46	-	-	74	-21.54	0	101	V
			* 11.085233		46.9	ADR	37.9	-44.55	0	40.25	54	-13.75	-	-	0	101	H
			* 11.088841		58.95	PK-U	37.9	-44.38	0	52.47	-	-	74	-21.53	0	101	H
* 2.254180		49.64	ADR		31.5	-50.23	0	30.91	54	-23.09	-	-	150	110	V		
* 2.255398		49.83	ADR		31.5	-50.06	0	31.27	54	-22.73	-	-	150	110	H		
* 2.262224		61.37	PK-U		31.5	-50.03	0	42.84	-	-	74	-31.16	150	110	V		
* 2.267943		62.19	PK-U		31.5	-50.29	0	43.4	-	-	74	-30.6	150	110	H		
* 4.113073		46.64	ADR		33.4	-47.89	0	32.15	54	-21.85	-	-	150	110	V		
* 4.113119		58.59	PK-U		33.4	-47.89	0	44.1	-	-	74	-29.9	150	110	H		
* 4.117434		46.5	ADR		33.5	-47.8	0	32.2	54	-21.8	-	-	150	110	H		
EHT20 6995 (26T RU4)		* 4.135128	58.51	PK-U	33.5	-47.85	0	44.16	-	-	74	-29.84	150	110	V		
		* 11.089066	46.55	ADR	37.9	-44.38	0	40.07	54	-13.93	-	-	150	110	H		
		* 11.089358	58.49	PK-U	37.9	-44.29	0	52.1	-	-	74	-21.9	150	110	H		
		* 11.123531	46.68	ADR	37.9	-44.85	0	39.73	54	-14.27	-	-	150	110	V		
		* 11.125563	58.45	PK-U	37.9	-44.66	0	51.69	-	-	74	-22.31	150	110	V		
		* 2.235952	61.38	PK-U	31.5	-50.47	0	42.41	-	-	74	-31.59	0	101	H		
		* 2.245926	61.53	PK-U	31.5	-49.99	0	43.04	-	-	74	-30.96	0	101	V		
		* 2.246633	49.72	ADR	31.5	-50.19	0	31.03	54	-22.97	-	-	0	101	V		
		* 2.250203	49.78	ADR	31.5	-49.94	0	31.34	54	-22.66	-	-	0	101	H		
		* 3.994932	47.29	ADR	33.5	-48.47	0	32.32	54	-21.68	-	-	0	101	H		
		* 4.001350	58.81	PK-U	33.5	-47.8	0	44.51	-	-	74	-29.49	0	101	V		
		* 4.002905	47.17	ADR	33.5	-47.78	0	32.89	54	-21.11	-	-	0	101	V		
EHT20 7095 (26T RU8)		* 4.013445	59.02	PK-U	33.5	-47.89	0	44.63	-	-	74	-29.37	0	101	H		
		* 11.056740	59.22	PK-U	37.8	-45.07	0	51.95	-	-	74	-22.05	0	101	V		
		* 11.083829	58.36	PK-U	37.9	-44.23	0	52.03	-	-	74	-21.97	0	101	H		
		* 11.085445	46.72	ADR	37.9	-44.51	0	40.11	54	-13.89	-	-	0	101	H		
		* 11.091193	46.74	ADR	37.9	-44.28	0	40.36	54	-13.64	-	-	0	101	V		

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

20MHz Cont.

UNII-5 (MIMO CDD)	Channel Frequency MHz	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbt/FI tr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (RU Mode)	6895 (52+26T RU70)	6+16	2.985711	58.86	PK-U	32.8	0.00	-48.10	43.56	-	-	88.2	-44.64	0	101	H
			2.983422	47.18	ADR	32.8	0.00	-48.10	31.88	68.2	-36.32	-	-	0	101	H
			3.008512	58.81	PK-U	32.9	0.00	-47.90	43.81	-	-	88.2	-44.39	0	101	V
			2.988545	47.22	ADR	32.8	0.00	-48.10	31.92	68.2	-36.28	-	-	0	101	V
			10.055793	56.22	PK-U	37.4	0.00	-45.30	48.32	-	-	88.2	-39.88	0	101	H
			10.057953	44.72	ADR	37.4	0.00	-45.40	36.72	68.2	-31.48	-	-	0	101	H
			17.404095	53.76	PK-U	41.4	0.00	-40.00	55.16	-	-	88.2	-33.04	0	101	H
			17.417377	41.91	ADR	41.3	0.00	-39.80	43.41	68.2	-24.79	-	-	0	101	H
			10.071524	56.77	PK-U	37.4	0.00	-45.40	48.77	-	-	88.2	-39.43	0	200	V
			10.06884	44.97	ADR	37.4	0.00	-45.28	37.09	68.2	-31.11	-	-	0	200	V
			17.411162	54.17	PK-U	41.4	0.00	-39.90	55.67	-	-	88.2	-32.53	0	200	V
			17.414838	41.83	ADR	41.4	0.00	-39.80	43.43	68.2	-24.77	-	-	0	200	V
	2.988245		58.91	PK-U	32.8	0.00	-48.10	43.61	-	-	88.2	-44.59	0	200	H	
	2.992249		47.48	ADR	32.8	0.00	-48.00	32.28	68.2	-35.92	-	-	0	200	H	
	2.984616		59.15	PK-U	32.8	0.00	-48.10	43.85	-	-	88.2	-44.35	0	101	V	
	2.97488		47.45	ADR	32.8	0.00	-48.09	32.16	68.2	-36.04	-	-	0	101	V	
	9.952954		56.54	PK-U	37.3	0.00	-45.10	48.74	-	-	88.2	-39.46	0	199	H	
	9.941464		45.00	ADR	37.3	0.00	-45.15	37.15	68.2	-31.05	-	-	0	199	H	
	16.811471		53.81	PK-U	41.1	0.00	-41.10	53.81	-	-	88.2	-34.39	0	199	H	
	16.822478		41.95	ADR	41.1	0.00	-41.00	42.05	68.2	-26.15	-	-	0	199	H	
	9.939568		56.95	PK-U	37.3	0.00	-45.06	49.19	-	-	88.2	-39.01	0	199	V	
	9.94066		45.07	ADR	37.3	0.00	-45.10	37.27	68.2	-30.93	-	-	0	199	V	
	16.812695		53.74	PK-U	41.1	0.00	-41.10	53.74	-	-	88.2	-34.46	0	101	V	
	16.812935		42.09	ADR	41.1	0.00	-41.10	42.09	68.2	-26.11	-	-	0	101	V	
	2.980058		59.63	PK-U	32.8	0.00	-48.10	44.33	-	-	88.2	-43.87	1	101	H	
	2.974561		47.59	ADR	32.8	0.00	-48.06	32.33	68.2	-35.87	-	-	1	101	H	
	2.968174		59.10	PK-U	32.7	0.00	-48.00	43.80	-	-	88.2	-44.4	1	101	V	
	2.973515		47.55	ADR	32.8	0.00	-48.05	32.30	68.2	-35.9	-	-	1	101	V	
	10.020351		56.13	PK-U	37.4	0.00	-45.00	48.53	-	-	88.2	-39.67	1	200	H	
	10.009052		44.25	ADR	37.4	0.00	-45.20	36.45	68.2	-31.75	-	-	1	200	H	
	16.995589		53.51	PK-U	41.3	0.00	-40.90	53.91	-	-	88.2	-34.29	1	101	H	
	16.976035		41.94	ADR	41.3	0.00	-40.80	42.44	68.2	-25.76	-	-	1	101	H	
	10.005829		55.96	PK-U	37.4	0.00	-45.20	48.16	-	-	88.2	-40.04	1	200	V	
	10.038041		44.29	ADR	37.4	0.00	-45.10	36.59	68.2	-31.61	-	-	1	200	V	
	16.970748		54.26	PK-U	41.3	0.00	-40.80	54.76	-	-	88.2	-33.44	1	200	V	
	16.973		41.87	ADR	41.3	0.00	-40.80	42.37	68.2	-25.83	-	-	1	200	V	

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

40MHz

UNII-8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dBm)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	6885	6+16	* 12.361714	53.25	PK-U	38.8	-40.47	0.00	51.58	-	-	74	-22.42	140	189	V
			* 12.364573	54.53	PK-U	38.8	-40.24	0.00	53.09	-	-	74	-20.91	140	189	H
			* 12.375904	41.67	ADR	38.7	-40.11	0.00	40.26	54	-13.74	-	-	140	189	H
			* 12.377744	41.51	ADR	38.7	-40.27	0.00	39.94	54	-14.06	-	-	140	189	V
			* 2.258069	45.79	ADR	32.0	-46.61	0.00	31.18	54	-22.82	-	-	140	189	V
			* 2.263197	57.80	PK-U	32.0	-46.70	0.00	43.10	-	-	74	-30.9	138	189	H
			* 2.271805	45.76	ADR	32.0	-46.72	0.00	31.04	54	-22.96	-	-	138	189	H
			* 2.272951	57.33	PK-U	32.0	-46.70	0.00	42.63	-	-	74	-31.37	140	189	V
			* 4.305085	45.40	ADR	33.7	-46.50	0.00	32.60	54	-21.4	-	-	140	189	V
			* 4.307712	45.48	ADR	33.7	-46.33	0.00	32.85	54	-21.15	-	-	140	189	H
			* 4.309872	57.16	PK-U	33.7	-46.30	0.00	44.56	-	-	74	-29.44	140	189	V
			* 4.310400	57.39	PK-U	33.7	-46.30	0.00	44.79	-	-	74	-29.21	140	189	H
	6965		* 12.362798	41.88	ADR	38.8	-40.42	0.00	40.26	54	-13.74	-	-	62	169	H
			* 12.376332	53.50	PK-U	38.7	-40.13	0.00	52.07	-	-	74	-21.93	62	169	H
			* 12.377376	41.56	ADR	38.7	-40.24	0.00	40.02	54	-13.98	-	-	62	169	V
			* 12.378164	53.53	PK-U	38.7	-40.30	0.00	51.93	-	-	74	-22.07	62	169	V
			* 2.744600	46.83	ADR	32.4	-47.36	0.00	31.87	54	-22.13	-	-	62	169	H
			* 2.745685	58.02	PK-U	32.4	-47.40	0.00	43.02	-	-	74	-30.98	62	169	V
			* 2.745761	46.74	ADR	32.4	-47.40	0.00	31.74	54	-22.26	-	-	62	169	V
			* 2.748422	58.58	PK-U	32.4	-47.36	0.00	43.62	-	-	74	-30.38	62	169	H
			* 4.299574	57.35	PK-U	33.7	-46.60	0.00	44.45	-	-	74	-29.55	62	169	V
			* 4.302463	57.30	PK-U	33.7	-46.60	0.00	44.40	-	-	74	-29.6	62	169	H
			* 4.305818	45.45	ADR	33.7	-46.50	0.00	32.65	54	-21.35	-	-	62	169	V
			* 4.315954	45.49	ADR	33.7	-46.30	0.00	32.89	54	-21.11	-	-	62	169	H
	7085		* 12.371654	53.76	PK-U	38.7	-40.13	0.00	52.33	-	-	74	-21.67	260	368	V
			* 12.378973	42.42	ADR	38.7	-40.30	0.00	40.82	54	-13.18	-	-	260	368	H
			* 12.383249	53.81	PK-U	38.8	-40.38	0.00	52.23	-	-	74	-21.77	260	368	H
			* 12.386760	42.16	ADR	38.8	-40.35	0.00	40.61	54	-13.39	-	-	260	368	V
			* 2.734285	57.94	PK-U	32.4	-47.17	0.00	43.17	-	-	74	-30.83	260	368	H
			* 2.736529	46.84	ADR	32.4	-47.30	0.00	31.94	54	-22.06	-	-	260	368	V
			* 2.739689	46.07	ADR	32.4	-47.27	0.00	31.20	54	-22.8	-	-	260	368	H
			* 2.751341	58.06	PK-U	32.4	-47.37	0.00	43.09	-	-	74	-30.91	260	368	V
			* 4.303091	56.18	PK-U	33.7	-46.59	0.00	43.29	-	-	74	-30.71	260	368	H
			* 4.308357	44.78	ADR	33.7	-46.30	0.00	32.18	54	-21.82	-	-	260	368	H
			* 4.317325	44.97	ADR	33.7	-46.27	0.00	32.40	54	-21.6	-	-	260	368	V
			* 4.322533	56.82	PK-U	33.7	-46.30	0.00	44.22	-	-	74	-29.78	260	368	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

80MHz

UNII-8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Fltr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	6945	6+16	3.436360	58.42	PK-U	32.8	-48.34	0.00	42.88	-	-	88.2	-45.32	0	101	H
			3.443110	46.78	ADR	32.8	-48.36	0.00	31.22	68.2	-36.98	-	-	0	101	H
			3.455246	58.45	PK-U	32.7	-48.20	0.00	42.95	-	-	88.2	-45.25	0	101	V
			3.449563	46.68	ADR	32.7	-47.91	0.00	31.47	68.2	-36.73	-	-	0	101	V
			13.797551	58.45	PK-U	38.9	-46.19	0.00	51.16	-	-	88.2	-37.04	0	101	H
			13.829416	46.73	ADR	38.9	-46.39	0.00	39.24	68.2	-28.96	-	-	0	101	H
			13.798847	58.56	PK-U	38.9	-46.10	0.00	51.36	-	-	88.2	-36.84	0	101	V
			13.792175	46.72	ADR	38.9	-46.05	0.00	39.57	68.2	-28.63	-	-	0	101	V
			* 17.866294	58.58	PK-U	41.2	-43.24	0.00	56.54	-	-	74	-17.46	0	101	H
			* 17.862878	47.19	ADR	41.2	-43.99	0.00	44.40	54	-9.6	-	-	0	101	H
			* 17.86383	58.81	PK-U	41.2	-43.83	0.00	56.18	-	-	74	-17.82	0	101	V
			* 17.859875	47.07	ADR	41.2	-43.79	0.00	44.48	54	-9.52	-	-	0	101	V
	7025		3.479205	58.07	PK-U	32.7	-47.76	0.00	43.01	-	-	88.2	-45.19	2	101	H
			3.476490	46.81	ADR	32.7	-47.90	0.00	31.61	68.2	-36.59	-	-	2	101	H
			3.490537	58.84	PK-U	32.8	-47.93	0.00	43.71	-	-	88.2	-44.49	2	101	V
			3.472886	46.64	ADR	32.7	-47.89	0.00	31.45	68.2	-36.75	-	-	2	101	V
			13.964778	59.20	PK-U	39.0	-46.27	0.00	51.93	-	-	88.2	-36.27	2	101	H
			13.977589	47.75	ADR	39.0	-46.12	0.00	40.63	68.2	-27.57	-	-	2	101	H
			13.971249	59.34	PK-U	39.0	-46.38	0.00	51.96	-	-	88.2	-36.24	2	101	V
			13.967214	47.71	ADR	39.0	-46.14	0.00	40.57	68.2	-27.63	-	-	2	101	V
			* 17.885537	59.45	PK-U	41.2	-43.41	0.00	57.24	-	-	74	-16.76	2	101	H
			* 17.872566	47.00	ADR	41.2	-43.56	0.00	44.64	54	-9.36	-	-	2	101	H
			* 17.871294	58.88	PK-U	41.2	-43.71	0.00	56.37	-	-	74	-17.63	2	101	V
			* 17.859763	47.23	ADR	41.2	-43.78	0.00	44.65	54	-9.35	-	-	2	101	V
11be (Partial RU Mode / Highest PSD)	6945	6+16	* 3.912285	42.70	PK-U	33.9	-25.12	0.00	51.48	-	-	74	-22.52	360	100	H
			* 3.888850	31.23	ADR	33.9	-25.33	0.00	39.80	54	-14.2	-	-	360	100	H
			* 3.911506	42.94	PK-U	33.9	-25.13	0.00	51.71	-	-	74	-22.29	360	100	V
			* 3.916322	30.92	ADR	33.9	-25.12	0.00	39.70	54	-14.3	-	-	360	100	V
			1.957877	31.00	ADR	31.6	-26.94	0.00	35.66	68.2	-32.54	-	-	360	100	V
			1.958254	42.72	PK-U	31.6	-26.94	0.00	47.38	-	-	88.2	-40.82	360	100	H
			1.960857	30.90	ADR	31.6	-26.89	0.00	35.61	68.2	-32.59	-	-	360	100	H
			1.969202	42.63	PK-U	31.6	-26.93	0.00	47.30	-	-	88.2	-40.9	360	100	V
			13.646026	55.79	PK-U	38.8	-43.84	0.00	50.75	-	-	88.2	-37.45	360	100	V
			13.656233	44.10	ADR	38.8	-43.80	0.00	39.10	68.2	-29.1	-	-	360	100	V
			13.656797	44.03	ADR	38.8	-43.79	0.00	39.04	68.2	-29.16	-	-	360	100	H
			13.663337	56.15	PK-U	38.8	-43.77	0.00	51.18	-	-	88.2	-37.02	360	100	H
	7025		* 3.879839	42.95	PK-U	33.8	-25.39	0.00	51.36	-	-	74	-22.64	360	100	H
			* 3.872108	31.54	ADR	33.8	-25.35	0.00	39.99	54	-14.01	-	-	360	100	H
			* 3.872120	43.50	PK-U	33.8	-25.35	0.00	51.95	-	-	74	-22.05	360	100	V
			* 3.869246	31.34	ADR	33.8	-25.32	0.00	39.82	54	-14.18	-	-	360	100	V
			1.976313	31.57	ADR	31.6	-26.89	0.00	36.28	68.2	-31.92	-	-	360	100	H
			2.003665	31.50	ADR	31.6	-26.90	0.00	36.20	68.2	-32	-	-	360	100	V
			2.006639	43.47	PK-U	31.6	-26.84	0.00	48.23	-	-	88.2	-39.97	360	100	V
			2.013404	43.17	PK-U	31.6	-26.90	0.00	47.87	-	-	88.2	-40.33	360	100	H
			10.047386	57.68	PK-U	37.4	-45.38	0.00	49.70	-	-	88.2	-38.5	360	100	H
			10.071514	57.35	PK-U	37.4	-45.62	0.00	49.13	-	-	88.2	-39.07	360	100	V
			10.071653	45.67	ADR	37.4	-45.62	0.00	37.45	68.2	-30.75	-	-	360	100	V
			10.073446	45.51	ADR	37.4	-45.61	0.00	37.30	68.2	-30.9	-	-	360	100	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

160MHz

UNII-8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cb/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	6985	6+16	* 2.230873	61.27	PK-U	31.5	-50.09	0.00	42.68	-	-	74	-31.32	360	101	V
			* 2.234726	61.52	PK-U	31.5	-49.88	0.00	43.14	-	-	74	-30.86	360	101	H
			* 2.244369	49.63	ADR	31.5	-49.84	0.00	31.29	54	-22.71	-	-	360	101	H
			* 2.249395	49.62	ADR	31.5	-50.02	0.00	31.10	54	-22.9	-	-	360	101	V
			* 4.050966	46.75	ADR	33.4	-47.80	0.00	32.35	54	-21.65	-	-	360	101	V
			* 4.051228	58.44	PK-U	33.4	-47.71	0.00	44.13	-	-	74	-29.87	360	101	V
			* 4.054174	58.81	PK-U	33.4	-47.52	0.00	44.69	-	-	74	-29.31	360	101	H
			* 4.054685	46.69	ADR	33.4	-47.57	0.00	32.52	54	-21.48	-	-	360	101	H
			* 12.596083	46.73	ADR	39.1	-45.51	0.00	40.32	54	-13.68	-	-	360	101	V
			* 12.598795	46.71	ADR	39.1	-45.40	0.00	40.41	54	-13.59	-	-	360	101	H
EHT160 (996+484T RU95)	6985	6+16	* 12.614585	58.28	PK-U	39.1	-45.26	0.00	52.12	-	-	74	-21.88	360	101	V
			* 12.620477	58.36	PK-U	39.1	-45.24	0.00	52.22	-	-	74	-21.78	360	101	H
			* 3.510016	30.49	ADR	33.1	-25.60	0.00	37.99	68.2	-30.21	-	-	360	100	H
			* 2.316678	43.81	PK-U	31.7	-26.66	0.00	48.85	-	-	74	-25.15	360	100	H
			* 2.343673	31.69	ADR	31.8	-26.55	0.00	36.94	54	-17.06	-	-	360	100	H
			* 2.315067	31.60	ADR	31.7	-26.64	0.00	36.66	54	-17.34	-	-	360	200	V
			2.307199	44.08	PK-U	31.6	-26.62	0.00	49.06	-	-	88.2	-39.14	360	200	V
			3.475167	42.06	PK-U	33.0	-25.55	0.00	49.51	-	-	88.2	-38.69	360	100	H
			3.480524	42.05	PK-U	33.0	-25.52	0.00	49.53	-	-	88.2	-38.67	360	201	V
			3.49302	30.34	ADR	33.0	-25.62	0.00	37.72	68.2	-30.48	-	-	360	201	V
			13.947192	44.46	ADR	39.0	-43.96	0.00	39.50	68.2	-28.7	-	-	360	100	H
			13.952886	56.10	PK-U	39.0	-44.04	0.00	51.06	-	-	88.2	-37.14	360	201	V
			13.954321	44.40	ADR	39.0	-44.02	0.00	39.38	68.2	-28.82	-	-	360	201	V
			13.959638	55.97	PK-U	39.0	-43.99	0.00	50.98	-	-	88.2	-37.22	360	100	H



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

WORST-CASE HARMONICS AND SPURIOUS EMISSIONS

802.11be EHT80 / 7025 MHz / 2Tx CDD / SU:

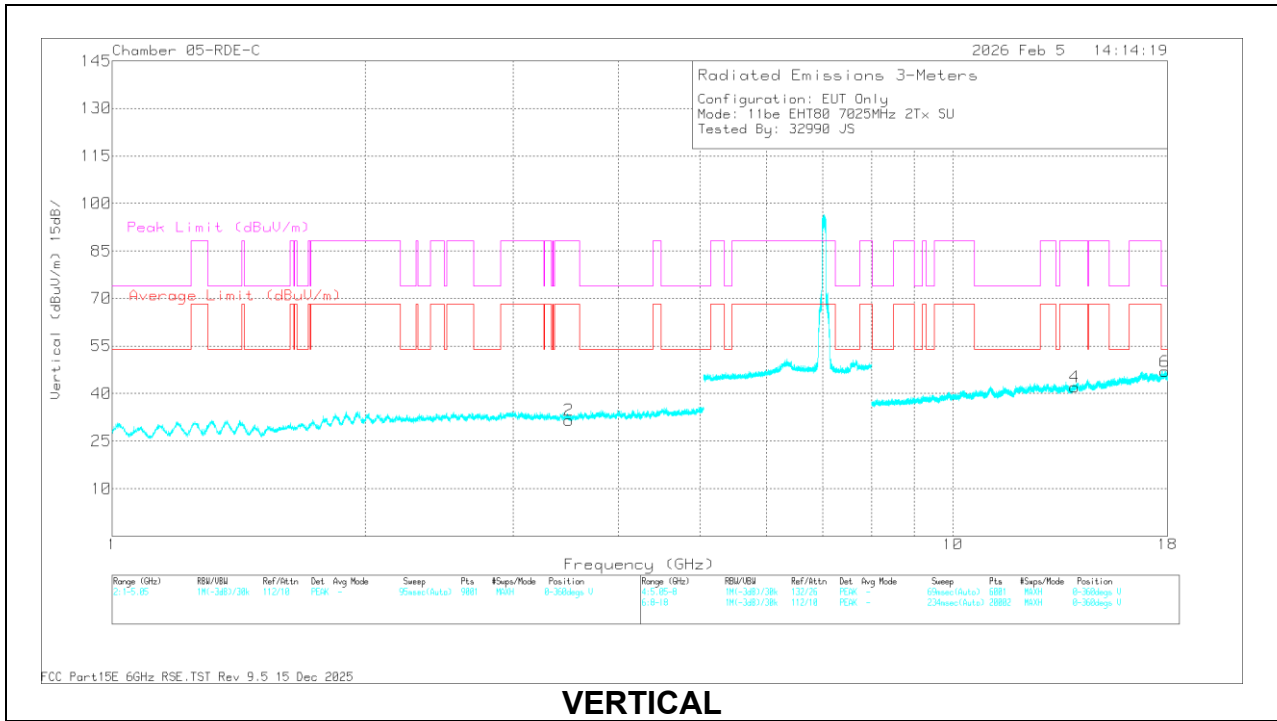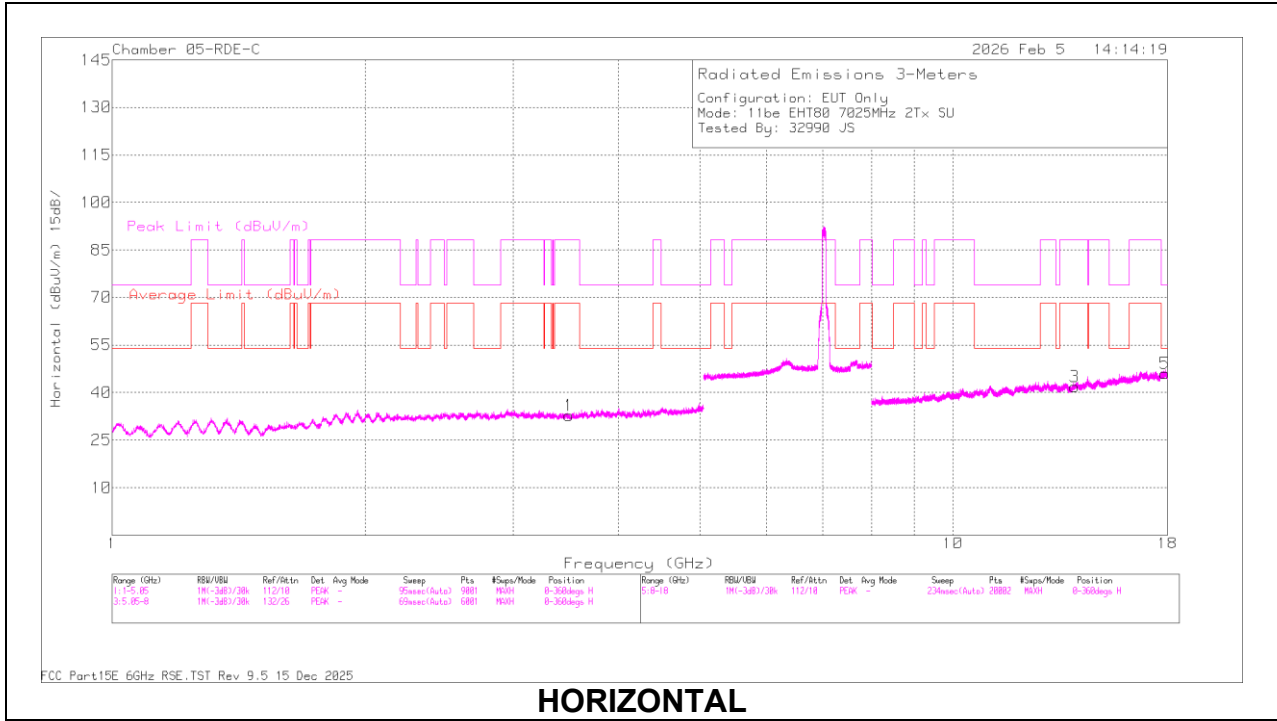

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	230300 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3.479205	58.07	PK-U	32.7	0	-47.76	43.01	-	-	88.2	-45.19	2	101	H
3.47649	46.81	ADR	32.7	0	-47.9	31.61	68.2	-36.59	-	-	2	101	H
3.490537	58.84	PK-U	32.8	0	-47.93	43.71	-	-	88.2	-44.49	2	101	V
3.472886	46.64	ADR	32.7	0	-47.89	31.45	68.2	-36.75	-	-	2	101	V
13.964778	59.2	PK-U	39	0	-46.27	51.93	-	-	88.2	-36.27	2	101	H
13.977589	47.75	ADR	39	0	-46.12	40.63	68.2	-27.57	-	-	2	101	H
13.971249	59.34	PK-U	39	0	-46.38	51.96	-	-	88.2	-36.24	2	101	V
13.967214	47.71	ADR	39	0	-46.14	40.57	68.2	-27.63	-	-	2	101	V
17.885537	59.45	PK-U	41.2	0	-43.41	57.24	-	-	74	-16.76	2	101	H
17.872566	47	ADR	41.2	0	-43.56	44.64	54	-9.36	-	-	2	101	H
17.871294	58.88	PK-U	41.2	0	-43.71	56.37	-	-	74	-17.63	2	101	V
17.859763	47.23	ADR	41.2	0	-43.78	44.65	54	-9.35	-	-	2	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.2. TRANSMITTER OUTSIDE 6.115 - 7.125 GHz, 1- 18GHz (VLP)

1.2.1. 802.11be SISO/MIMO MODE IN UNII-5 BAND – LOW BANDEDGE

The UNII-5 band was excluded from band-edge testing because its starting frequency lies well inside the band-edge threshold.

1.2.2. 802.11a SISO MODE IN UNII-8 BAND – BANDEDGE

UNII-8 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11a	7115	6	7.125	-36.12	Pk	35.7	11.8	0.00	-22.76	-11.38	-	-	-7	-4.38	26	100	V
			7.125145	-37.19	Pk	35.7	11.8	0.00	-22.77	-12.46	-	-	-7	-5.46	26	100	V
			7.125	-55	RMS	35.7	11.8	0.00	-22.76	-30.26	-27	-3.26	-	-	26	100	V
			7.125068	-54.84	RMS	35.7	11.8	0.00	-22.76	-30.1	-27	-3.1	-	-	26	100	V
			7.125	-39.63	Pk	35.7	11.8	0.00	-22.76	-14.89	-	-	-7	-7.89	83	106	H
			7.125145	-39.79	Pk	35.7	11.8	0.00	-22.77	-15.06	-	-	-7	-8.06	83	106	H
			7.125	-56.52	RMS	35.7	11.8	0.00	-22.76	-31.78	-27	-4.78	-	-	83	106	H
			7.125068	-58.53	RMS	35.7	11.8	0.00	-22.76	-33.79	-27	-6.79	-	-	83	106	H
		16	7.125	-27.73	Pk	35.6	11.8	0.00	-32.85	-13.18	-	-	-7	-6.18	100	107	H
			7.125068	-27.7	Pk	35.6	11.8	0.00	-32.85	-13.15	-	-	-7	-6.15	100	107	H
			7.125	-44.99	RMS	35.6	11.8	0.00	-32.85	-30.44	-27	-3.44	-	-	100	107	H
			7.125068	-46.54	RMS	35.6	11.8	0.00	-32.85	-31.99	-27	-4.99	-	-	100	107	H
			7.125	-36.14	Pk	35.6	11.8	0.00	-32.85	-21.59	-	-	-7	-14.59	312	164	V
			* 7.334057	-49.68	Pk	35.6	11.8	0.00	-31.9	-34.18	-	-	-21.2	-12.98	312	164	V
			7.125	-52.61	RMS	35.6	11.8	0.00	-32.85	-38.06	-27	-11.06	-	-	312	164	V
			* 7.517769	-61.77	RMS	35.7	11.8	0.00	-32.36	-46.63	-41.2	-5.43	-	-	312	164	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.2.3. 802.11be SISO SU MODE IN UNII-8 BAND – BANDEDGE

UNII-8 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (SU Mode)	7095	6	* 7.409579	-47.15	Pk	38.1	11.8	0	-36.9	-34.15	-	-	-21.2	-12.95	128	220	H
			* 7.494902	-59.7	RMS	38.1	11.8	0	-36.71	-46.51	-41.2	-5.31	-	-	128	220	H
			7.125	-38.8	Pk	38	11.8	0	-36.5	-25.5	-	-	-7	-18.5	128	220	H
			7.125	-56.08	RMS	38	11.8	0	-36.5	-42.78	-27	-15.78	-	-	128	220	H
			* 7.475691	-59.42	RMS	38.1	11.8	0	-36.9	-46.42	-41.2	-5.22	-	-	260	194	V
			7.125	-37.69	Pk	38	11.8	0	-36.5	-24.39	-	-	-7	-17.39	260	194	V
			7.125	-53.19	RMS	38	11.8	0	-36.5	-39.89	-27	-12.89	-	-	260	194	V
		16	7.125223	-32.53	Pk	38	11.8	0	-36.5	-19.23	-	-	-7	-12.23	260	194	V
			7.125	-43.05	Pk	35.5	11.8	0	-36.47	-32.22	-	-	-7	-25.22	214	192	H
			* 7.371157	-47.56	Pk	35.5	11.8	0	-36.36	-36.62	-	-	-21.2	-15.42	214	192	H
			7.125	-56.75	RMS	35.5	11.8	0	-36.47	-45.92	-27	-18.92	-	-	214	192	H
			* 7.492724	-59.87	RMS	35.6	11.8	0	-36.12	-48.59	-41.2	-7.39	-	-	214	192	H
			7.125	-45.25	Pk	35.5	11.8	0	-36.47	-34.42	-	-	-7	-27.42	130	226	V
			* 7.523991	-47.47	Pk	35.6	11.8	0	-36.05	-36.12	-	-	-21.2	-14.92	130	226	V
			7.125	-58.47	RMS	35.5	11.8	0	-36.47	-47.64	-27	-20.64	-	-	130	226	V
			* 7.483391	-59.66	RMS	35.6	11.8	0	-36.31	-48.57	-41.2	-7.37	-	-	130	226	V
EHT40 (SU Mode)	7085	6	7.125	-29.59	Pk	38	11.8	0	-36.5	-16.29	-	-	-7	-9.29	279	157	H
			7.125	-43.29	RMS	38	11.8	0	-36.5	-29.99	-27	-2.99	-	-	279	157	H
			7.126001	-43.32	RMS	38	11.8	0	-36.5	-30.02	-27	-3.02	-	-	279	157	H
			7.126312	-27.73	Pk	38	11.8	0	-36.5	-14.43	-	-	-7	-7.43	279	157	H
			7.125	-28.8	Pk	38	11.8	0	-36.5	-15.5	-	-	-7	-8.5	261	223	V
			7.125	-44.07	RMS	38	11.8	0	-36.5	-30.77	-27	-3.77	-	-	261	223	V
			7.125068	-28.64	Pk	38	11.8	0	-36.5	-15.34	-	-	-7	-8.34	261	223	V
		16	7.125379	-43.54	RMS	38	11.8	0	-36.5	-30.24	-27	-3.24	-	-	261	223	V
			7.125	-29.88	Pk	35.5	11.8	0	-36.47	-19.05	-	-	-7	-12.05	205	215	H
			7.126156	-29.29	Pk	35.5	11.8	0	-36.37	-18.36	-	-	-7	-11.36	205	215	H
			7.125	-45.34	RMS	35.5	11.8	0	-36.47	-34.51	-27	-7.51	-	-	205	215	H
			* 7.500269	-59.96	RMS	35.6	11.8	0	-36.13	-48.69	-41.2	-7.49	-	-	205	215	H
			7.125	-36.47	Pk	35.5	11.8	0	-36.47	-25.64	-	-	-7	-18.64	129	201	V
			* 7.261723	-47.24	Pk	35.5	11.8	0	-36.39	-36.33	-	-	-21.2	-15.13	129	201	V
			7.125	-50.7	RMS	35.5	11.8	0	-36.47	-39.87	-27	-12.87	-	-	129	201	V
			* 7.51668	-59.89	RMS	35.6	11.8	0	-36.18	-48.67	-41.2	-7.47	-	-	129	201	V
			* 7.286846	-47.63	Pk	38.2	11.8	0	-37	-34.63	-	-	-21.2	-13.43	123	218	H
EHT80 (SU Mode)	7025	6	* 7.408491	-59.53	RMS	38.1	11.8	0	-36.9	-46.53	-41.2	-5.33	-	-	123	218	H
			7.125	-38.19	Pk	38	11.8	0	-36.5	-24.89	-	-	-7	-17.89	123	218	H
			7.125	-53	RMS	38	11.8	0	-36.5	-39.7	-27	-12.7	-	-	123	218	H
			* 7.348368	-47.36	Pk	38.2	11.8	0	-36.9	-34.26	-	-	-21.2	-13.06	259	211	V
			* 7.405068	-59.44	RMS	38.1	11.8	0	-36.91	-46.45	-41.2	-5.25	-	-	259	211	V
			7.125	-35.55	Pk	38	11.8	0	-36.5	-22.25	-	-	-7	-15.25	259	211	V
			7.125	-50.42	RMS	38	11.8	0	-36.5	-37.12	-27	-10.12	-	-	259	211	V
		16	7.125	-41.36	Pk	35.5	11.8	0	-36.47	-30.53	-	-	-7	-23.53	218	200	H
			* 7.47048	-47.56	Pk	35.6	11.8	0	-36.32	-36.48	-	-	-21.2	-15.28	218	200	H
			7.125	-54.73	RMS	35.5	11.8	0	-36.47	-43.9	-27	-16.9	-	-	218	200	H
			* 7.52228	-59.66	RMS	35.6	11.8	0	-36.17	-48.43	-41.2	-7.23	-	-	218	200	H
			7.125	-45.19	Pk	35.5	11.8	0	-36.47	-34.36	-	-	-7	-27.36	131	219	V
			* 7.522046	-47.44	Pk	35.6	11.8	0	-36.17	-36.21	-	-	-21.2	-15.01	131	219	V
			7.125	-58.36	RMS	35.5	11.8	0	-36.47	-47.53	-27	-20.53	-	-	131	219	V
			* 7.523835	-59.94	RMS	35.6	11.8	0	-36.07	-48.61	-41.2	-7.41	-	-	131	219	V
EHT160 (SU Mode)	6985	6	* 7.250446	-59.05	RMS	38.2	11.8	0.14	-36.7	-45.61	-41.2	-4.41	-	-	308	211	H
			7.125	-35.36	Pk	38	11.8	0	-36.5	-22.06	-	-	-7	-15.06	308	211	H
			7.125	-46.99	RMS	38	11.8	0.14	-36.5	-33.55	-27	-6.55	-	-	308	211	H
			7.141556	-31.27	Pk	38	11.8	0	-36.6	-18.07	-	-	-7	-11.07	308	211	H
			7.125	-32.87	Pk	38	11.8	0	-36.5	-19.57	-	-	-7	-12.57	257	169	V
			7.125	-45.08	RMS	38	11.8	0.14	-36.5	-31.64	-27	-4.64	-	-	257	169	V
			7.125456	-29.15	Pk	38	11.8	0	-36.5	-15.85	-	-	-7	-8.85	257	169	V
		16	7.12919	-42.95	RMS	38	11.8	0.14	-36.6	-29.61	-27	-2.61	-	-	257	169	V
			7.125	-35.6	Pk	35.5	11.8	0	-36.47	-24.77	-	-	-7	-17.77	204	195	H
			7.141401	-32.43	Pk	35.5	11.8	0	-36.29	-21.42	-	-	-7	-14.42	204	195	H
			7.125	-47.28	RMS	35.5	11.8	0.14	-36.47	-36.31	-27	-9.31	-	-	204	195	H
			* 7.459746	-59.79	RMS	35.6	11.8	0.14	-36.2	-48.45	-41.2	-7.25	-	-	204	195	H
			7.125	-42.68	Pk	35.5	11.8	0	-36.47	-31.85	-	-	-7	-24.85	131	191	V
			* 7.510769	-47.22	Pk	35.6	11.8	0	-36.17	-35.99	-	-	-21.2	-14.79	131	191	V
			7.125	-54.41	RMS	35.5	11.8	0.14	-36.47	-43.44	-27	-16.44	-	-	131	191	V
			* 7.524224	-59.76	RMS	35.6	11.8	0.14	-36.06	-48.28	-41.2	-7.08	-	-	131	191	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.2.4. 802.11be SISO PARTIAL RU MODE IN UNII-8 BAND – BANDEDGE

UNII-8 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (RU 106T / Index 54)	7095	6	7.125	-51.97	Pk	35.6	11.8	0	-34.4	-38.97	-	-	-7	-31.97	122	237	H
			* 7.486191	-49.8	Pk	35.6	11.8	0	-33.4	-35.8	-	-	-21.2	-14.6	122	237	H
			7.125	-62.1	RMS	35.6	11.8	0.09	-34.4	-49.01	-27	-22.01	-	-	122	237	H
			* 7.501124	-61.62	RMS	35.6	11.8	0.09	-33.29	-47.42	-41.2	-6.22	-	-	122	237	H
			7.125	-52.09	Pk	35.6	11.8	0	-34.4	-39.09	-	-	-7	-32.09	207	150	V
			* 7.465813	-49.57	Pk	35.6	11.8	0	-33.68	-35.85	-	-	-21.2	-14.65	207	150	V
			7.125	-62.73	RMS	35.6	11.8	0.09	-34.4	-49.64	-27	-22.64	-	-	207	150	V
			* 7.378857	-61.34	RMS	35.6	11.8	0.09	-33.79	-47.64	-41.2	-6.44	-	-	207	150	V
		16	7.125	-63.09	Pk	35.7	11.8	0	-22.76	-38.35	-	-	-7	-31.35	90	218	H
			* 7.466591	-61.2	Pk	35.7	11.8	0	-22.14	-35.84	-	-	-21.2	-14.64	90	218	H
			7.125	-73.72	RMS	35.7	11.8	0.09	-22.76	-48.89	-27	-21.89	-	-	90	218	H
			* 7.520024	-73.47	RMS	35.7	11.8	0.09	-22.15	-48.03	-41.2	-6.83	-	-	90	218	H
			7.125	-63.14	Pk	35.7	11.8	0	-22.76	-38.4	-	-	-7	-31.4	153	221	V
			* 7.483469	-62.02	Pk	35.7	11.8	0	-22.15	-36.67	-	-	-21.2	-15.47	153	221	V
			7.125	-73.55	RMS	35.7	11.8	0.09	-22.76	-48.72	-27	-21.72	-	-	153	221	V
			* 7.495835	-73.54	RMS	35.7	11.8	0.09	-22.16	-48.11	-41.2	-6.91	-	-	153	221	V
EHT80 (RU 464+242T / Index 90)	7025	6	7.125	-49.01	Pk	35.6	11.8	0	-33.85	-35.46	-	-	-7	-28.46	92	189	H
			7.403124	-48.24	Pk	35.6	11.8	0	-33.83	-34.67	-	-	-21.2	-13.47	92	189	H
			7.125	-61.26	RMS	35.6	11.8	0	-33.85	-47.71	-27	-20.71	-	-	92	189	H
			7.518002	-61.2	RMS	35.6	11.8	0	-33.75	-47.55	-41.2	-6.35	-	-	92	189	H
			7.125	-47.78	Pk	35.6	11.8	0	-33.85	-34.23	-	-	-7	-27.23	73	234	V
			7.469002	-48.68	Pk	35.6	11.8	0	-33.79	-35.07	-	-	-21.2	-13.87	73	234	V
			7.125	-60.94	RMS	35.6	11.8	0	-33.85	-47.39	-27	-20.39	-	-	73	234	V
			7.434002	-60.96	RMS	35.6	11.8	0	-33.8	-47.36	-41.2	-6.16	-	-	73	234	V
		16	7.125	-50.41	Pk	35.6	11.8	0	-33.85	-36.86	-	-	-7	-29.86	356	376	H
			7.517924	-48.78	Pk	35.6	11.8	0	-33.75	-35.13	-	-	-21.2	-13.93	356	376	H
			7.125	-61.96	RMS	35.6	11.8	0	-33.85	-48.41	-27	-21.41	-	-	356	376	H
			7.508513	-61.12	RMS	35.6	11.8	0	-33.73	-47.45	-41.2	-6.25	-	-	356	376	H
			7.125	-52.27	Pk	35.6	11.8	0	-33.85	-38.72	-	-	-7	-31.72	327	346	V
			7.399779	-49.16	Pk	35.6	11.8	0	-33.81	-35.57	-	-	-21.2	-14.37	327	346	V
			7.125	-62.39	RMS	35.6	11.8	0	-33.85	-48.84	-27	-21.84	-	-	327	346	V
			7.510535	-61.3	RMS	35.6	11.8	0	-33.7	-47.6	-41.2	-6.4	-	-	327	346	V
EHT160 (RU 996+484 / Index 94)	6985	6	7.125	-43.99	Pk	35.6	11.8	0	-33.85	-30.44	-	-	-7	-23.44	95	183	H
			7.260246	-48.73	Pk	35.6	11.8	0	-33.88	-35.21	-	-	-21.2	-14.01	95	183	H
			7.125	-55.09	RMS	35.6	11.8	0	-33.85	-41.54	-27	-14.54	-	-	95	183	H
			7.506724	-61.26	RMS	35.6	11.8	0	-33.75	-47.61	-41.2	-6.41	-	-	95	183	H
			7.125	-43.67	Pk	35.6	11.8	0	-33.85	-30.12	-	-	-7	-23.12	77	232	V
			7.513724	-49.58	Pk	35.6	11.8	0	-33.7	-35.88	-	-	-21.2	-14.68	77	232	V
			7.125	-55.2	RMS	35.6	11.8	0	-33.85	-41.65	-27	-14.65	-	-	77	232	V
			7.512791	-61.05	RMS	35.6	11.8	0	-33.7	-47.35	-41.2	-6.15	-	-	77	232	V
		16	7.125	-48.48	Pk	35.6	11.8	0	-33.85	-34.93	-	-	-7	-27.93	357	373	H
			7.481291	-49.13	Pk	35.6	11.8	0	-33.7	-35.43	-	-	-21.2	-14.23	357	373	H
			7.125	-60.16	RMS	35.6	11.8	0	-33.85	-46.61	-27	-19.61	-	-	357	373	H
			7.397835	-60.95	RMS	35.6	11.8	0	-33.82	-47.37	-41.2	-6.17	-	-	357	373	H
			7.125	-51.46	Pk	35.6	11.8	0	-33.85	-37.91	-	-	-7	-30.91	331	146	V
			7.508669	-48.89	Pk	35.6	11.8	0	-33.73	-35.22	-	-	-21.2	-14.02	331	146	V
			7.125	-61.91	RMS	35.6	11.8	0	-33.85	-48.36	-27	-21.36	-	-	331	146	V
			7.508124	-61.24	RMS	35.6	11.8	0	-33.75	-47.59	-41.2	-6.39	-	-	331	146	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.2.5. 802.11a MIMO MODE IN UNII-8 BAND – BANDEDGE

UNII-8 (MIMO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11a	7115	6+16	7.125	-27.69	Pk	35.6	11.8	0.00	-33.85	-14.14	-	-	-7	-7.14	330	161	H
			7.125068	-27.82	Pk	35.6	11.8	0.00	-33.85	-14.27	-	-	-7	-7.27	330	161	H
			7.125	-43.33	RMS	35.6	11.8	0.00	-33.85	-29.78	-27	-2.78	-	-	330	161	H
			7.125068	-44.17	RMS	35.6	11.8	0.00	-33.85	-30.62	-27	-3.62	-	-	330	161	H
			7.125	-27.64	Pk	35.6	11.8	0.00	-33.85	-14.09	-	-	-7	-7.09	242	108	V
			7.125068	-28.5	Pk	35.6	11.8	0.00	-33.85	-14.95	-	-	-7	-7.95	242	108	V
			7.125	-44.71	RMS	35.6	11.8	0.00	-33.85	-31.16	-27	-4.16	-	-	242	108	V
			7.125068	-45.28	RMS	35.6	11.8	0.00	-33.85	-31.73	-27	-4.73	-	-	242	108	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.2.6. 802.11be MIMO SU MODE IN UNII-8 BAND – BANDEDGE

UNII-8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (SU Mode)	7095	6 + 16	* 7.374968	-50.24	Pk	35.6	11.8	0	-30.25	-33.09	-	-	-21.2	-11.89	184	161	H
			* 7.498946	-62.17	RMS	35.7	11.8	0	-30.33	-45	-41.2	-3.8	-	-	184	161	H
			7.125	-48.06	Pk	35.7	11.8	0	-30.23	-30.79	-	-	-7	-23.79	184	161	H
			7.125	-62.36	RMS	35.7	11.8	0	-30.23	-45.09	-27	-18.09	-	-	184	161	H
			* 7.277046	-50.07	Pk	35.6	11.8	0	-30.01	-32.68	-	-	-21.2	-11.48	201	388	V
			* 7.493191	-62	RMS	35.7	11.8	0	-30.31	-44.81	-41.2	-3.61	-	-	201	388	V
			7.125	-45.73	Pk	35.7	11.8	0	-30.23	-28.46	-	-	-7	-21.46	201	388	V
			7.125	-61.2	RMS	35.7	11.8	0	-30.23	-43.93	-27	-16.93	-	-	201	388	V
EHT40 (SU Mode)	7085	6 + 16	7.125	-26.39	Pk	35.7	11.8	0	-37.8	-16.69	-	-	-7	-9.69	97	155	H
			7.129656	-25.91	Pk	35.7	11.8	0	-38.1	-16.51	-	-	-7	-9.51	97	155	H
			7.125	-39.96	RMS	35.7	11.8	0	-37.8	-30.26	-27	-3.26	-	-	97	155	H
			7.125301	-39.7	RMS	35.7	11.8	0	-37.86	-30.06	-27	-3.06	-	-	97	155	H
			7.125	-33.11	Pk	35.7	11.8	0	-37.8	-23.41	-	-	-7	-16.41	50	284	V
			7.12849	-31.32	Pk	35.7	11.8	0	-38.2	-22.02	-	-	-7	-15.02	50	284	V
			7.125	-46.89	RMS	35.7	11.8	0	-37.8	-37.19	-27	-10.19	-	-	50	284	V
			7.502291	-59.07	RMS	35.7	11.8	0	-38.04	-49.61	-41.2	-8.41	-	-	50	284	V
EHT80 (SU Mode)	7025	6 + 16	7.125	-36.36	Pk	35.7	11.8	0	-37.8	-26.66	-	-	-7	-19.66	6	327	H
			7.126623	-32.8	Pk	35.7	11.8	0	-37.88	-23.18	-	-	-7	-16.18	6	327	H
			7.125	-49.7	RMS	35.7	11.8	0	-37.8	-40	-27	-13	-	-	6	327	H
			7.520024	-59.31	RMS	35.7	11.8	0	-37.8	-49.61	-41.2	-8.41	-	-	6	327	H
			7.125	-42.67	Pk	35.7	11.8	0	-37.8	-32.97	-	-	-7	-25.97	40	302	V
			7.449791	-46.85	Pk	35.7	11.8	0	-38.1	-37.45	-	-	-21.2	-16.25	40	302	V
			7.125	-55.47	RMS	35.7	11.8	0	-37.8	-45.77	-27	-18.77	-	-	40	302	V
			7.271057	-59.57	RMS	35.6	11.8	0	-37.42	-49.59	-41.2	-8.39	-	-	40	302	V
EHT160 (SU Mode)	6985	6 + 16	7.125	-43.28	Pk	35.7	11.8	0	-30.23	-26.01	-	-	-7	-19.01	171	181	H
			7.125	-55.37	RMS	35.7	11.8	0.14	-30.23	-37.96	-27	-10.96	-	-	171	181	H
			7.127479	-47.14	RMS	35.7	11.8	0.14	-30.27	-29.77	-27	-2.77	-	-	171	181	H
			7.127556	-34.4	Pk	35.7	11.8	0	-30.27	-17.17	-	-	-7	-10.17	171	181	H
			* 7.337713	-50.21	Pk	35.7	11.8	0	-30.19	-32.9	-	-	-21.2	-11.7	203	114	V
			* 7.251612	-62.24	RMS	35.7	11.8	0.14	-30.06	-44.66	-41.2	-3.46	-	-	203	114	V
			7.125	-38.99	Pk	35.7	11.8	0	-30.23	-21.72	-	-	-7	-14.72	203	114	V
			7.125	-50.59	RMS	35.7	11.8	0.14	-30.23	-33.18	-27	-6.18	-	-	203	114	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.2.7. 802.11be MIMO PARTIAL RU MODE IN UNII-8 BAND – BANDEDGE

UNII-8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (RU 106T / Index 54)	7095	6 + 16	* 7.439135	-49.53	Pk	35.7	11.8	0	-30.42	-32.45	-	-	-21.2	-11.25	252	113	H
			* 7.503069	-61.9	RMS	35.7	11.8	0.09	-30.36	-44.67	-41.2	-3.47	-	-	252	113	H
			7.125	-52.87	Pk	35.7	11.8	0	-30.23	-35.6	-	-	-7	-28.6	252	113	H
			7.125	-64.03	RMS	35.7	11.8	0.09	-30.23	-46.67	-27	-19.67	-	-	252	113	H
			* 7.524224	-50.18	Pk	35.7	11.8	0	-30.24	-32.92	-	-	-21.2	-11.72	230	154	V
			* 7.469235	-62.12	RMS	35.7	11.8	0.09	-30.41	-44.94	-41.2	-3.74	-	-	230	154	V
			7.125	-53.72	Pk	35.7	11.8	0	-30.23	-36.45	-	-	-7	-29.45	230	154	V
			7.125	-64.24	RMS	35.7	11.8	0.09	-30.23	-46.88	-27	-19.88	-	-	230	154	V
			7.125	-51.35	Pk	35.6	11.8	0	-33.85	-37.8	-	-	-7	-30.8	358	393	H
			7.504624	-49.36	Pk	35.6	11.8	0	-33.77	-35.73	-	-	-21.2	-14.53	358	393	H
EHT80 (RU 484+242T / Index 92)	7025	6 + 16	7.125	-62.83	RMS	35.6	11.8	0	-33.85	-49.28	-27	-22.28	-	-	358	393	H
			7.497235	-61.25	RMS	35.6	11.8	0	-33.71	-47.56	-41.2	-6.36	-	-	358	393	H
			7.125	-51.47	Pk	35.6	11.8	0	-33.85	-37.92	-	-	-7	-30.92	34	343	V
			7.520102	-49.46	Pk	35.6	11.8	0	-33.77	-35.83	-	-	-21.2	-14.63	34	343	V
			7.125	-62.71	RMS	35.6	11.8	0	-33.85	-49.16	-27	-22.16	-	-	34	343	V
			7.519246	-61.22	RMS	35.6	11.8	0	-33.78	-47.6	-41.2	-6.4	-	-	34	343	V
			7.125	-46.68	Pk	35.6	11.8	0	-33.85	-33.13	-	-	-7	-26.13	353	377	H
			7.480435	-48.97	Pk	35.6	11.8	0	-33.72	-35.29	-	-	-21.2	-14.09	353	377	H
EHT160 (RU 996+484T / Index 94)	6985	6 + 16	7.125	-58.63	RMS	35.6	11.8	0	-33.85	-45.08	-27	-18.08	-	-	353	377	H
			7.515902	-61.02	RMS	35.6	11.8	0	-33.73	-47.35	-41.2	-6.15	-	-	353	377	H
			7.125	-49.02	Pk	35.6	11.8	0	-33.85	-35.47	-	-	-7	-28.47	31	344	V
			7.509369	-49.47	Pk	35.6	11.8	0	-33.71	-35.78	-	-	-21.2	-14.58	31	344	V
			7.125	-60.91	RMS	35.6	11.8	0	-33.85	-47.36	-27	-20.36	-	-	31	344	V
			7.504158	-61.1	RMS	35.6	11.8	0	-33.76	-47.46	-41.2	-6.26	-	-	31	344	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

WORST-CASE BANDEDGE (HIGH CHANNEL)
802.11be EHT160 / 7115 MHz / 1TX - ANT 6 / SISO / SU

HORIZONTAL/VERTICAL RESULT


HORIZONTAL RESULT

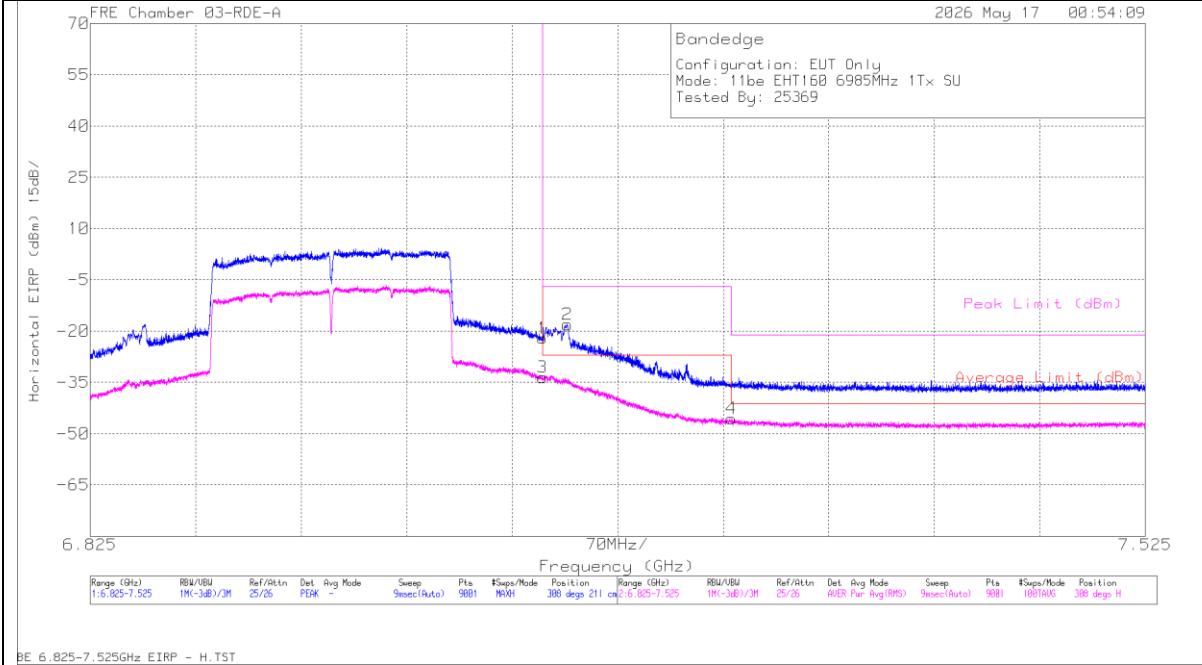

Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)
* 7.250446	-59.05	RMS	38.2	11.8	.14	-36.7	-45.61	-41.2	-4.41	-	-	308
7.125	-35.36	Pk	38	11.8	0	-36.5	-22.06	-	-	-7	-15.06	308
7.125	-46.99	RMS	38	11.8	.14	-36.5	-33.55	-27	-6.55	-	-	308
7.141556	-31.27	Pk	38	11.8	0	-36.6	-18.07	-	-	-7	-11.07	308

Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

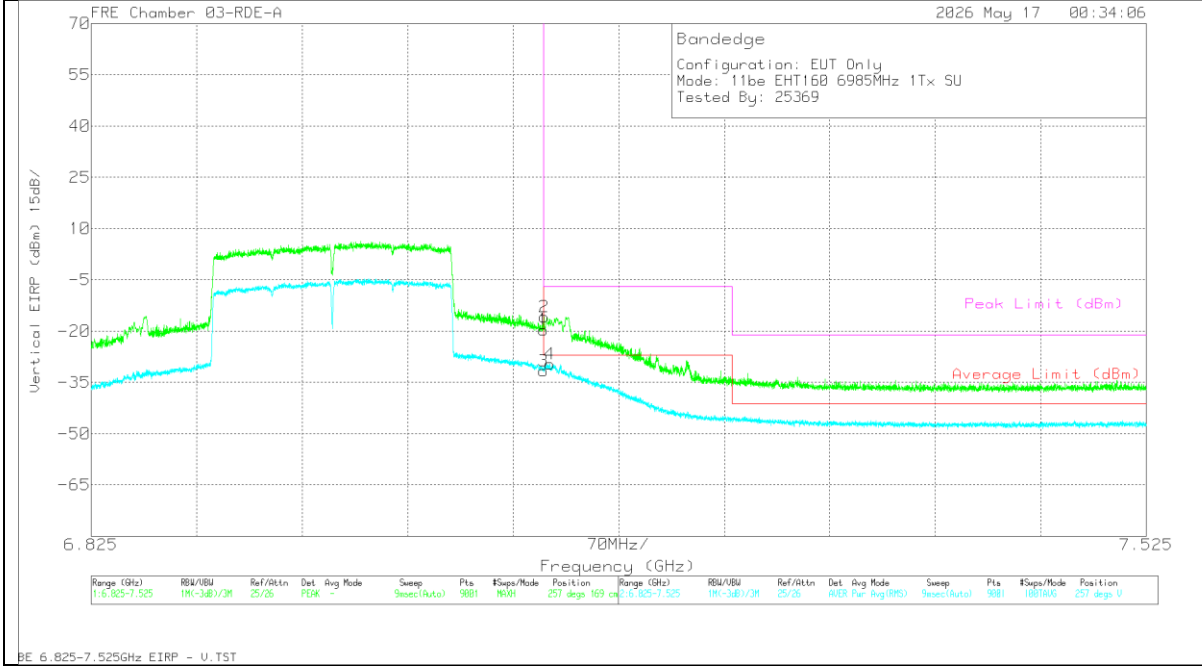

Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)
7.125	-32.87	Pk	38	11.8	0	-36.5	-19.57	-	-	-7	-12.57	257
7.125	-45.08	RMS	38	11.8	.14	-36.5	-31.64	-27	-4.64	-	-	257
7.125456	-29.15	Pk	38	11.8	0	-36.5	-15.85	-	-	-7	-8.85	257
7.12919	-42.95	RMS	38	11.8	.14	-36.6	-29.61	-27	-2.61	-	-	257

Pk - Peak detector
RMS - RMS detection

1.2.8. 802.11a MIMO MODE IN UNII-8 BAND – SPURIOUS EMISSIONS**20MHz**

UNII-8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11a mode	7115	6+16	* 2.352516	31.46	ADR	31.8	-26.54	0.00	36.72	54	-17.28	-	-	0	100	H
			* 2.380448	31.77	ADR	32	-26.63	0.00	37.14	54	-16.86	-	-	0	201	V
			* 2.387513	43.41	PK-U	32	-26.63	0.00	48.78	-	-	74	-25.22	0	201	V
			* 2.389882	43.53	PK-U	32	-26.65	0.00	48.88	-	-	74	-25.12	0	100	H
			* 3.537359	42.83	PK-U	33.2	-25.44	0.00	50.59	-	-	88.2	-37.61	0	100	H
			* 3.540147	30.99	ADR	33.2	-25.45	0.00	38.74	68.2	-29.46	-	-	0	200	V
			* 3.559946	31.27	ADR	33.2	-25.43	0.00	39.04	68.2	-29.16	-	-	0	100	H
			* 3.569851	42.85	PK-U	33.2	-25.42	0.00	50.63	-	-	88.2	-37.57	0	200	V
			14.213512	56.45	PK-U	39.2	-44.06	0.00	51.59	-	-	88.2	-36.61	0	100	H
			14.213864	44.66	ADR	39.2	-44.06	0.00	39.8	68.2	-28.4	-	-	0	201	V
			14.225935	56.31	PK-U	39.2	-44.2	0.00	51.31	-	-	88.2	-36.89	0	201	V
			14.232724	44.88	ADR	39.2	-44.1	0.00	39.98	68.2	-28.22	-	-	0	100	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.2.9. 802.11be MIMO MODE – SPURIOUS EMISSIONS

20MHz

UNII-5.8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cb/ Filt/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	6115 (Low Channel)	6 + 16	* 12.217646	53.63	PK-U	39	-41.6	0.00	51.03	-	-	74	-22.97	1	101	H
			* 12.23616	41.79	ADR	39	-41.6	0.00	39.19	54	-14.81	-	-	1	101	H
			* 12.224293	53.28	PK-U	39	-41.6	0.00	50.68	-	-	74	-23.32	1	200	V
			* 12.221782	41.79	ADR	39	-41.6	0.00	39.19	54	-14.81	-	-	1	200	V
			2.023818	57.75	PK-U	31.5	-46.58	0.00	42.67	-	-	88.2	-45.53	1	200	V
			2.025053	46.24	ADR	31.5	-46.59	0.00	31.15	68.2	-37.05	-	-	1	200	V
			2.029567	46.45	ADR	31.5	-46.59	0.00	31.36	68.2	-36.84	-	-	1	101	H
			2.029714	58.25	PK-U	31.5	-46.59	0.00	43.16	-	-	88.2	-45.04	1	101	H
			3.026603	56.32	PK-U	33	-46.37	0.00	42.95	-	-	88.2	-45.25	1	200	V
			3.034442	44.7	ADR	33	-46.33	0.00	31.37	68.2	-36.83	-	-	1	200	V
			3.042007	44.61	ADR	33	-46.29	0.00	31.32	68.2	-36.88	-	-	1	200	H
			3.043891	56.31	PK-U	33	-46.28	0.00	43.03	-	-	88.2	-45.17	1	200	H
	6535 (Mid Channel)	6 + 16	* 3.596938	43.06	PK-U	33.2	-25.41	0.00	50.85	-	-	88.2	-37.35	360	100	H
			* 3.601418	31.16	ADR	33.2	-25.41	0.00	38.95	54	-15.05	-	-	360	100	H
			* 3.633013	42.62	PK-U	33.3	-25.36	0.00	50.56	-	-	74	-23.44	360	100	V
			* 3.595867	31.16	ADR	33.2	-25.44	0.00	38.92	68.2	-29.28	-	-	360	100	V
			1.931794	43.33	PK-U	31.5	-26.86	0.00	47.97	-	-	88.2	-40.23	360	100	H
			1.934717	31.42	ADR	31.5	-26.81	0.00	36.11	68.2	-32.09	-	-	360	100	H
			1.940648	42.83	PK-U	31.5	-26.91	0.00	47.42	-	-	88.2	-40.78	360	100	V
			1.940856	31.42	ADR	31.5	-26.92	0.00	36	68.2	-32.2	-	-	360	100	V
			13.699142	55.61	PK-U	38.8	-43.42	0.00	50.99	-	-	88.2	-37.21	360	100	V
			13.708363	44.03	ADR	38.8	-43.39	0.00	39.44	68.2	-28.76	-	-	360	100	V
			13.710387	55.53	PK-U	38.8	-43.38	0.00	50.95	-	-	88.2	-37.25	360	100	H
			13.725164	44.03	ADR	38.8	-43.47	0.00	39.36	68.2	-28.84	-	-	360	100	H
	7095 (High Channel)	6 + 16	* 3.898501	43.75	PK-U	33.9	-25.22	0.00	52.43	-	-	74	-21.57	360	100	H
			* 3.918123	30.95	ADR	33.9	-25.11	0.00	39.74	54	-14.26	-	-	360	100	H
			* 3.900743	43.12	PK-U	33.9	-25.19	0.00	51.83	-	-	74	-22.17	360	100	V
			* 3.924239	30.96	ADR	33.9	-25.16	0.00	39.7	54	-14.3	-	-	360	100	V
			* 12.417962	56.33	PK-U	38.8	-43.37	0.00	51.76	-	-	74	-22.24	360	100	H
			* 12.389114	44.37	ADR	38.8	-43.72	0.00	39.45	54	-14.55	-	-	360	100	H
			* 12.397324	56.62	PK-U	38.8	-43.43	0.00	51.99	-	-	74	-22.01	360	100	V
			* 12.401767	44.47	ADR	38.8	-43.31	0.00	39.96	54	-14.04	-	-	360	100	V
			1.928883	31.54	ADR	31.5	-26.89	0.00	36.15	68.2	-32.05	-	-	360	100	H
			1.937979	31.46	ADR	31.5	-26.86	0.00	36.1	68.2	-32.1	-	-	360	100	V
			1.944533	43.47	PK-U	31.5	-26.9	0.00	48.07	-	-	88.2	-40.13	360	100	H
			1.94675	43.31	PK-U	31.5	-26.85	0.00	47.96	-	-	88.2	-40.24	360	100	V
	6115 (106T) (Low Channel)	6 + 16	2.975007	59.6	PK-U	32.8	-48.1	0.00	44.3	-	-	88.2	-43.9	1	200	H
			2.975811	47.63	ADR	32.8	-48.02	0.00	32.41	68.2	-35.79	-	-	1	200	H
			2.981666	59.27	PK-U	32.8	-48.1	0.00	43.97	-	-	88.2	-44.23	1	101	V
			2.994722	47.38	ADR	32.8	-48.03	0.00	32.15	68.2	-36.05	-	-	1	101	V
			10.002049	56.34	PK-U	37.4	-45.2	0.00	48.54	-	-	88.2	-39.66	1	199	H
			10.002769	44.46	ADR	37.4	-45.2	0.00	36.66	68.2	-31.54	-	-	1	199	H
			10.003773	56.83	PK-U	37.4	-45.2	0.00	49.03	-	-	88.2	-39.17	1	199	V
			10.005217	44.62	ADR	37.4	-45.2	0.00	36.82	68.2	-31.38	-	-	1	199	V
			17.134596	41.4	ADR	41.4	-40.24	0.00	42.56	68.2	-25.64	-	-	1	101	H
			17.141115	41.4	ADR	41.4	-40.2	0.00	42.6	68.2	-25.6	-	-	1	199	V
			17.142455	53.26	PK-U	41.4	-40.2	0.00	54.46	-	-	88.2	-33.74	1	199	V
			17.161725	53.33	PK-U	41.4	-40.2	0.00	54.53	-	-	88.2	-33.67	1	101	H
	6535 (106T) (Mid Channel)	6 + 16	1.837583	62.42	PK-U	31	-49.2	0.00	44.22	-	-	88.2	-43.98	255	152	V
			1.845267	50.38	ADR	31.2	-49.17	0.00	32.41	68.2	-35.79	-	-	255	152	V
			1.845739	50.2	ADR	31.2	-49.13	0.00	32.27	68.2	-35.93	-	-	53	255	H
			1.857138	66.28	PK-U	31.3	-49.2	0.00	48.38	-	-	88.2	-39.82	53	255	H
			1.891167	62.75	PK-U	31.4	-49.12	0.00	45.03	-	-	88.2	-43.17	208	395	H
			1.895493	50.6	ADR	31.4	-49.1	0.00	32.9	68.2	-35.3	-	-	17	239	V
			1.897835	69.49	PK-U	31.4	-49.1	0.00	51.79	-	-	88.2	-36.41	17	239	V
			1.902539	50.27	ADR	31.4	-49.2	0.00	32.47	68.2	-35.73	-	-	208	395	H
			16.969188	47.41	ADR	41.3	-44.9	0.00	43.81	68.2	-24.39	-	-	17	200	V
			16.969648	47.45	ADR	41.3	-44.9	0.00	43.85	68.2	-24.35	-	-	17	101	H
			16.974264	58.92	PK-U	41.3	-44.87	0.00	55.35	-	-	88.2	-32.85	17	200	V
			16.988622	58.89	PK-U	41.4	-44.74	0.00	55.55	-	-	88.2	-32.65	17	101	H
	7095 (106T) (High Channel)	6 + 16	* 12.287657	53.58	PK-U	38.8	-41.21	0.00	51.17	-	-	74	-22.83	360	101	V
			* 12.311637	41.09	ADR	38.8	-40.87	0.00	39.02	54	-14.98	-	-	360	101	H
			* 12.316642	41.32	ADR	38.8	-40.8	0.00	39.32	54	-14.68	-	-	360	101	V
			* 12.34035	52.75	PK-U	38.8	-40.5	0.00	51.05	-	-	74	-22.95	360	101	H
			* 2.252469	57.76	PK-U	32	-46.67	0.00	43.09	-	-	74	-30.91	360	101	H
			* 2.258774	57.78	PK-U	32	-46.68	0.00	43.1	-	-	74	-30.9	360	101	V
			* 2.2589	46.36	ADR	32	-46.68	0.00	31.68	54	-22.32	-	-	360	101	H
			* 2.262636	46.05	ADR	32	-46.69	0.00	31.36	54	-22.64	-	-	360	101	V
			* 3.719071	44.01	ADR	33.2	-45.02	0.00	32.19	54	-21.81	-	-	360	101	V
			* 3.729984	56.24	PK-U	33.3	-44.99	0.00	44.55	-	-	74	-29.45	360	101	H
			* 3.731126	44.16	ADR	33.3	-44.99	0.00	32.47	54	-21.53	-	-	360	101	H
			* 3.736083	55.94	PK-U	33.3	-44.98	0.00	44.26	-	-	74	-29.74	360	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

40MHz

UNII-5-8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	6125 (Low Channel)	6+16	1.916738	57.71	PK-U	31.1	-46.39	0	42.42	-	-	88.2	-45.78	315	200	H
			1.916921	46.16	ADR	31.1	-46.4	0	30.86	68.2	-37.34	-	-	315	200	V
			1.916961	57.9	PK-U	31.1	-46.4	0	42.6	-	-	88.2	-45.6	315	200	V
			1.919022	46.14	ADR	31.1	-46.4	0	30.84	68.2	-37.36	-	-	315	200	H
			3.452125	42.99	ADR	32.6	-44.9	0	30.69	68.2	-37.51	-	-	315	101	V
			3.457273	55.1	PK-U	32.7	-44.91	0	42.89	-	-	88.2	-45.31	315	101	H
			3.459724	54.62	PK-U	32.7	-44.91	0	42.41	-	-	88.2	-45.79	315	101	V
			3.463779	43.09	ADR	32.7	-44.91	0	30.88	68.2	-37.32	-	-	315	101	H
			14.742351	54.32	PK-U	39.1	-42.03	0	51.39	-	-	88.2	-36.81	315	200	V
			14.745495	54.55	PK-U	39.1	-42.02	0	51.63	-	-	88.2	-36.57	315	200	H
			14.747627	42.7	ADR	39.1	-42.01	0	39.79	68.2	-28.41	-	-	315	200	V
			14.763749	42.69	ADR	39.2	-41.95	0	39.94	68.2	-28.26	-	-	315	200	H
	6525 (Mid Channel)	6+16	* 15.677549	54.66	PK-U	40.4	-42.65	0	52.41	-	-	74	-21.59	0	101	V
			* 15.684716	43.03	ADR	40.4	-42.63	0	40.8	54	-13.2	-	-	0	200	H
			* 15.696055	54.55	PK-U	40.4	-42.8	0	52.15	-	-	74	-21.85	0	200	H
			* 15.699366	43.11	ADR	40.4	-42.8	0	40.71	54	-13.29	-	-	0	101	V
			* 2.243879	58.35	PK-U	32	-46.7	0	43.65	-	-	74	-30.35	0	199	H
			* 2.261656	46.26	ADR	32	-46.67	0	31.59	54	-22.41	-	-	0	101	V
			* 2.26193	46.22	ADR	32	-46.69	0	31.53	54	-22.47	-	-	0	199	H
			* 2.265095	58.22	PK-U	32	-46.7	0	43.52	-	-	74	-30.48	0	101	V
			* 9.495525	42.73	ADR	36.6	-42.95	0	36.38	54	-17.62	-	-	0	200	H
			9.501776	54.81	PK-U	36.6	-42.82	0	48.59	-	-	88.2	-39.61	0	101	V
			9.502724	54.72	PK-U	36.6	-42.8	0	48.52	-	-	88.2	-39.68	0	200	H
			9.50274	42.9	ADR	36.6	-42.8	0	36.7	68.2	-31.5	-	-	0	101	V
	7085 (High Channel)	6+16	* 3.981534	55.93	PK-U	33.5	-45.5	0	43.93	-	-	74	-30.07	2	200	H
			* 3.980267	44.48	ADR	33.5	-45.5	0	32.48	54	-21.52	-	-	2	200	H
			* 3.985948	55.99	PK-U	33.5	-45.5	0	43.99	-	-	74	-30.01	2	200	V
			* 3.975594	44.68	ADR	33.5	-45.56	0	32.62	54	-21.38	-	-	2	200	V
			1.966821	58.24	PK-U	31.3	-46.2	0	43.34	-	-	88.2	-44.86	2	101	V
			1.967279	46.69	ADR	31.3	-46.23	0	31.76	68.2	-36.44	-	-	2	101	V
			1.969222	46.41	ADR	31.3	-46.34	0	31.37	68.2	-36.83	-	-	2	101	H
			1.975448	58.51	PK-U	31.4	-46.46	0	43.45	-	-	88.2	-44.75	2	101	H
			10.22055	42.42	ADR	37.7	-42.1	0	38.02	68.2	-30.18	-	-	2	101	V
			10.227601	54.61	PK-U	37.7	-42	0	50.31	-	-	88.2	-37.89	2	101	V
			10.228289	42.55	ADR	37.7	-42	0	38.25	68.2	-29.95	-	-	2	101	H
			10.238736	54.08	PK-U	37.7	-42.13	0	49.65	-	-	88.2	-38.55	2	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

80MHz

UNII-5-8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	6145 (Low Channel)	6+16	* 3.972282	57.16	PK-U	33.5	-45.5	0	45.16	-	-	74	-28.84	0	200	H
			* 3.974517	44.62	ADR	33.5	-45.55	0	32.57	54	-21.43	-	-	0	200	H
			* 3.967805	55.89	PK-U	33.5	-45.58	0	43.81	-	-	74	-30.19	0	200	V
			* 3.973778	44.49	ADR	33.5	-45.58	0	32.41	54	-21.59	-	-	0	200	V
			* 11.623527	54.05	PK-U	38.5	-41.45	0	51.1	-	-	74	-22.9	0	101	H
			* 11.623256	42	ADR	38.5	-41.43	0	39.07	54	-14.93	-	-	0	101	H
			* 11.616592	54.51	PK-U	38.4	-41.46	0	51.45	-	-	74	-22.55	0	200	V
			* 11.617168	41.98	ADR	38.4	-41.52	0	38.86	54	-15.14	-	-	0	200	V
			1.966561	59.16	PK-U	31.3	-46.2	0	44.26	-	-	88.2	-43.94	0	101	V
			1.970353	46.63	ADR	31.3	-46.46	0	31.47	68.2	-36.73	-	-	0	200	H
			1.971796	46.51	ADR	31.4	-46.4	0	31.51	68.2	-36.69	-	-	0	101	V
			1.979014	58.3	PK-U	31.4	-46.5	0	43.2	-	-	88.2	-45	0	200	H
	6545 (Mid Channel)	6+16	* 4.020603	55.72	PK-U	33.5	-45.66	0	43.56	-	-	74	-30.44	0	200	H
			* 4.026736	44.47	ADR	33.5	-45.7	0	32.27	54	-21.73	-	-	0	200	H
			* 4.01891	56.23	PK-U	33.5	-45.59	0	44.14	-	-	74	-29.86	0	200	V
			* 4.022479	44.38	ADR	33.5	-45.65	0	32.23	54	-21.77	-	-	0	200	V
			* 4.022639	56.16	PK-U	33.5	-45.66	0	44	-	-	74	-30	0	200	V
			* 3.983123	44.44	ADR	33.5	-45.5	0	32.44	54	-21.56	-	-	0	200	V
			* 11.499394	53.93	PK-U	38.2	-41.7	0	50.43	-	-	74	-23.57	0	101	H
			* 11.518356	42.42	ADR	38.3	-41.64	0	39.08	54	-14.92	-	-	0	101	H
			* 11.526747	54.2	PK-U	38.3	-41.73	0	50.77	-	-	74	-23.23	0	101	V
			* 11.501286	42.39	ADR	38.2	-41.67	0	38.92	54	-15.08	-	-	0	101	V
			1.969601	58.29	PK-U	31.3	-46.42	0	43.17	-	-	88.2	-45.03	0	200	H
			1.973507	46.38	ADR	31.4	-46.4	0	31.38	68.2	-36.82	-	-	0	101	V
	7025 (High Channel)	6+16	* 15.799274	55	PK-U	40.4	-42.3	0	53.1	-	-	74	-20.9	360	101	H
			* 15.805545	43.52	ADR	40.4	-42.65	0	41.27	54	-12.73	-	-	360	101	H
			* 15.813789	43.6	ADR	40.4	-42.9	0	41.1	54	-12.9	-	-	360	101	V
			* 15.818436	55.84	PK-U	40.4	-42.96	0	53.28	-	-	74	-20.72	360	101	V
			* 2.781995	59.09	PK-U	32.5	-47.1	0	44.49	-	-	74	-29.51	360	200	H
			* 2.790781	47.11	ADR	32.5	-47.12	0	32.49	54	-21.51	-	-	360	200	H
			* 2.791185	59.11	PK-U	32.5	-47.1	0	44.51	-	-	74	-29.49	360	200	V
			* 2.799451	46.95	ADR	32.4	-47.2	0	32.15	54	-21.85	-	-	360	200	V
			* 9.310091	55.09	PK-U	36.4	-42.4	0	49.09	-	-	74	-24.91	360	200	H
			* 9.328238	42.79	ADR	36.4	-42.4	0	36.79	54	-17.21	-	-	360	200	H
			* 9.331121	54.36	PK-U	36.4	-42.31	0	48.45	-	-	74	-25.55	360	101	V
			* 9.331593	42.89	ADR	36.4	-42.36	0	36.93	54	-17.07	-	-	360	101	V
11be (Partial RU Mode / Highest PSD)	6145 (484+242T) (Low Channel)	6+16	* 12.308117	55.91	PK-U	38.9	-44.18	0	50.63	-	-	74	-23.37	360	100	H
			* 12.295634	43.82	ADR	38.9	-44.29	0	38.43	54	-15.57	-	-	360	100	H
			* 12.277692	55.75	PK-U	38.9	-44.08	0	50.57	-	-	74	-23.43	360	201	V
			* 12.30932	43.9	ADR	38.9	-44.07	0	38.73	54	-15.27	-	-	360	201	V
			2.036835	43.44	PK-U	31.6	-26.91	0	48.13	-	-	88.2	-40.07	360	100	H
			2.054605	31.61	ADR	31.6	-26.87	0	36.34	68.2	-31.86	-	-	360	201	V
			2.06215	31.82	ADR	31.6	-26.95	0	36.47	68.2	-31.73	-	-	360	100	H
			2.06655	44.17	PK-U	31.6	-26.86	0	48.91	-	-	88.2	-39.29	360	201	V
			3.058075	43.7	PK-U	32.9	-25.37	0	51.23	-	-	88.2	-36.97	360	100	H
			3.063646	31.13	ADR	32.9	-25.49	0	38.54	68.2	-29.66	-	-	360	200	V
			3.078922	31.13	ADR	33	-25.61	0	38.52	68.2	-29.68	-	-	360	100	H
			3.083559	42.71	PK-U	33	-25.6	0	50.11	-	-	88.2	-38.09	360	200	V
	6545 (484+242T) (Mid Channel)	6+16	* 2.291947	44.53	PK-U	31.6	-26.52	0	49.61	-	-	74	-24.39	0	201	V
			* 2.281298	31.42	ADR	31.6	-26.54	0	36.48	54	-17.52	-	-	0	201	V
			2.167415	42.96	PK-U	31.4	-26.76	0	47.6	-	-	88.2	-40.6	0	100	H
			2.188931	31.19	ADR	31.4	-26.56	0	36.03	68.2	-32.17	-	-	0	201	V
			2.189302	42.81	PK-U	31.4	-26.56	0	47.65	-	-	88.2	-40.55	0	201	V
			2.199736	31.16	ADR	31.4	-26.63	0	35.93	68.2	-32.27	-	-	0	100	H
			3.254427	30.8	ADR	33	-25.57	0	38.23	68.2	-29.97	-	-	0	100	H
			3.284045	42.64	PK-U	32.9	-25.7	0	49.84	-	-	88.2	-38.36	0	100	H
			13.07723	43.81	ADR	38.9	-43.32	0	39.39	68.2	-28.81	-	-	0	201	V
			13.084269	56.11	PK-U	38.9	-43.28	0	51.73	-	-	88.2	-36.47	0	201	V
			13.093682	55.63	PK-U	38.9	-43.28	0	51.25	-	-	88.2	-36.95	0	100	H
			13.106359	43.81	ADR	38.9	-43.57	0	39.14	68.2	-29.06	-	-	0	100	H
	7025 (484+242T) (High Channel)	6+16	* 1.515261	31.09	ADR	28.1	-27.26	0	31.93	54	-22.07	-	-	268	329	H
			* 1.520216	31.56	ADR	28.1	-27.35	0	32.31	54	-21.69	-	-	51	288	V
			* 1.525364	43.34	PK-U	28	-27.34	0	44	-	-	74	-30	51	288	V
			* 1.543188	42.79	PK-U	28	-27.27	0	43.52	-	-	74	-30.48	268	329	H
			* 11.941189	55.64	PK-U	38.8	-44.35	0	50.09	-	-	74	-23.91	119	202	V
			* 11.950403	55.25	PK-U	38.8	-44.37	0	49.68	-	-	74	-24.32	194	141	H
			* 11.952111	43.89	ADR	38.8	-44.31	0	38.38	54	-15.62	-	-	194	141	H
			* 11.959977	43.81	ADR	38.8	-44.23	0	38.38	54	-15.62	-	-	119	202	V
			* 4.012968	30.68	ADR	33.8	-25.32	0	39.16	54	-14.84	-	-	253	272	H
			* 4.017008	30.84	ADR	33.8	-25.3	0	39.34	54	-14.66	-	-	268	275	V
			* 4.020865	42.43	PK-U	33.8	-25.31	0	50.92	-	-	74	-23.08	268	275	V
			* 4.025258	42.46	PK-U	33.8	-25.33	0	50.93	-	-	74	-23.07	253	272	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

160MHz

UNII-5-8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode)	6185 (Low Channel)	6 + 16	* 12.343643	55.74	PK-U	38.8	-43.75	0	50.79	-	-	74	-23.21	0	100	H
			* 12.338196	44	ADR	38.8	-43.69	0	39.11	54	-14.89	-	-	0	100	H
			* 12.327887	55.76	PK-U	38.8	-43.8	0	50.76	-	-	74	-23.24	0	100	V
			* 12.338506	44.01	ADR	38.8	-43.68	0	39.13	54	-14.87	-	-	0	100	V
			2.032209	43.2	PK-U	31.6	-26.99	0	47.81	-	-	88.2	-40.39	0	100	V
			2.038657	43.77	PK-U	31.6	-26.89	0	48.48	-	-	88.2	-39.72	0	100	H
			2.057339	31.77	ADR	31.6	-26.89	0	36.48	68.2	-31.72	-	-	0	100	H
			2.057573	31.6	ADR	31.6	-26.89	0	36.31	68.2	-31.89	-	-	0	100	V
			3.047998	31.11	ADR	32.9	-25.51	0	38.5	68.2	-29.7	-	-	0	100	V
			3.063777	31.13	ADR	32.9	-25.5	0	38.53	68.2	-29.67	-	-	0	100	H
	6505 (Mid Channel)	6 + 16	3.07176	42.95	PK-U	33	-25.45	0	50.5	-	-	88.2	-37.7	0	100	V
			3.074625	42.98	PK-U	33	-25.49	0	50.49	-	-	88.2	-37.71	0	100	H
			2.088292	31.45	ADR	31.5	-26.86	0	36.09	68.2	-32.11	-	-	0	100	H
			2.089972	31.32	ADR	31.5	-26.9	0	35.92	68.2	-32.28	-	-	0	100	V
			2.091349	43.62	PK-U	31.5	-26.92	0	48.2	-	-	88.2	-40	0	100	H
			2.099489	42.93	PK-U	31.5	-26.81	0	47.62	-	-	88.2	-40.58	0	100	V
			3.164052	31.25	ADR	33	-25.49	0	38.76	68.2	-29.44	-	-	0	100	H
			3.175037	42.66	PK-U	33	-25.46	0	50.2	-	-	88.2	-38	0	100	H
			3.180963	31.26	ADR	33	-25.38	0	38.88	68.2	-29.32	-	-	0	100	V
			3.188228	43.4	PK-U	33	-25.41	0	50.99	-	-	88.2	-37.21	0	100	V
	6985 (High Channel)	6 + 16	12.78659	55.46	PK-U	39	-43.87	0	50.59	-	-	88.2	-37.61	0	100	H
			12.787703	43.94	ADR	39	-43.93	0	39.01	68.2	-29.19	-	-	0	100	H
			12.788704	43.78	ADR	39	-43.93	0	38.85	68.2	-29.35	-	-	0	100	V
			12.791572	55.67	PK-U	39	-43.91	0	50.76	-	-	88.2	-37.44	0	100	V
			2.292333	43.58	PK-U	31.6	-26.53	0	48.65	-	-	74	-25.35	0	100	V
			2.295521	43.31	PK-U	31.6	-26.52	0	48.39	-	-	74	-25.61	0	100	H
			* 2.318736	31.8	ADR	31.7	-26.6	0	36.9	54	-17.1	-	-	0	100	H
			* 2.327402	31.83	ADR	31.7	-26.6	0	36.93	54	-17.07	-	-	0	100	V
			3.402518	30.85	ADR	32.9	-25.3	0	38.45	68.2	-29.75	-	-	0	100	H
			3.407746	42.56	PK-U	32.9	-25.32	0	50.14	-	-	88.2	-38.06	0	100	V
11be (Partial RU Mode)	6185 (996+484T) (Low Channel)	6 + 16	3.40906	42.8	PK-U	32.9	-25.32	0	50.38	-	-	88.2	-37.82	0	100	H
			3.4118	30.88	ADR	32.9	-25.37	0	38.41	68.2	-29.79	-	-	0	100	V
			13.784404	56.15	PK-U	38.9	-43.25	0	51.8	-	-	88.2	-36.4	0	100	H
			13.78677	55.61	PK-U	38.9	-43.33	0	51.18	-	-	88.2	-37.02	0	100	V
			13.789713	44.39	ADR	38.9	-43.42	0	39.87	68.2	-28.33	-	-	0	100	V
			13.80117	44.22	ADR	38.9	-43.57	0	39.55	68.2	-28.65	-	-	0	100	H
			* 11.056899	56.36	PK-U	37.6	-43.71	0	50.25	-	-	74	-23.75	0	200	H
			* 11.06615	55.93	PK-U	37.6	-43.3	0	50.23	-	-	74	-23.77	0	101	V
			* 11.070858	44.1	ADR	37.6	-43.2	0	38.5	54	-15.5	-	-	0	200	H
			* 11.074177	44.14	ADR	37.6	-43.2	0	38.54	54	-15.46	-	-	0	101	V
	6505 (996+484T) (Mid Channel)	6 + 16	* 15.739921	52.95	PK-U	41.2	-41.2	0	52.95	-	-	74	-21.05	0	200	V
			* 15.740261	53.08	PK-U	41.2	-41.2	0	53.08	-	-	74	-20.92	0	101	H
			* 15.740585	41.4	ADR	41.2	-41.2	0	41.4	54	-12.6	-	-	0	200	V
			* 15.752052	41.21	ADR	41.2	-41.1	0	41.31	54	-12.69	-	-	0	101	H
			* 3.855549	46.18	ADR	33.4	-47.2	0	32.38	54	-21.62	-	-	0	100	H
			* 3.859131	58.46	PK-U	33.4	-47.21	0	44.65	-	-	74	-29.35	0	200	V
			* 3.864757	46.3	ADR	33.4	-47.3	0	32.4	54	-21.6	-	-	0	200	V
			* 3.869885	58.08	PK-U	33.5	-47.3	0	44.28	-	-	74	-29.72	0	100	H
			* 11.043509	44.25	ADR	37.6	-44	0	37.85	54	-16.15	-	-	0	199	V
			* 11.062998	56.55	PK-U	37.6	-43.5	0	50.65	-	-	74	-23.35	0	199	H
	6985 (996+484T) (High Channel)	6 + 16	* 11.071074	56.19	PK-U	37.6	-43.2	0	50.59	-	-	74	-23.41	0	199	V
			* 11.073789	44.17	ADR	37.6	-43.18	0	38.59	54	-15.41	-	-	0	199	H
			* 15.566194	41.48	ADR	41	-41.2	0	41.28	54	-12.72	-	-	0	101	V
			* 15.572317	41.45	ADR	41.1	-41.2	0	41.35	54	-12.65	-	-	0	101	H
			* 15.575717	53.46	PK-U	41.1	-41.13	0	53.43	-	-	74	-20.57	0	101	V
			* 15.576109	53.82	PK-U	41.1	-41.1	0	53.82	-	-	74	-20.18	0	101	H
			* 3.911389	46.26	ADR	33.5	-47.34	0	32.42	54	-21.58	-	-	0	101	V
			* 3.913717	46.75	ADR	33.5	-47.33	0	32.92	54	-21.08	-	-	0	200	H
			* 3.914597	57.82	PK-U	33.5	-47.3	0	44.02	-	-	74	-29.98	0	101	V
			* 3.915988	58.12	PK-U	33.5	-47.3	0	44.32	-	-	74	-29.68	0	200	H
	6985 (996+484T) (High Channel)	6 + 16	2.966175	47.56	ADR	32.7	-48	0	32.26	68.2	-35.94	-	-	1	200	V
			2.9699	47.54	ADR	32.7	-48	0	32.24	68.2	-35.96	-	-	1	200	H
			2.976183	59.09	PK-U	32.8	-48	0	43.89	-	-	88.2	-44.31	1	200	H
			2.982738	59.68	PK-U	32.8	-48.1	0	44.38	-	-	88.2	-43.82	1	200	V
			10.044158	56.39	PK-U	37.4	-45.28	0	48.51	-	-	88.2	-39.69	1	101	H
			10.054025	44.37	ADR	37.4	-45.2	0	36.57	68.2	-31.63	-	-	1	101	H
			10.055956	44.72	ADR	37.4	-45.3	0	36.82	68.2	-31.38	-	-	1	200	V
			10.056796	56.25	PK-U	37.4	-45.38	0	48.27	-	-	88.2	-39.93	1	200	V
			17.198864	41.26	ADR	41.4	-40.2	0	42.46	68.2	-25.74	-	-	1	200	H
			17.20242	53.41	PK-U	41.4	-40.2	0	54.61	-	-	88.2	-33.59	1	200	H
			17.218275	41.39	ADR	41.4	-40.1	0	42.69	68.2	-25.51	-	-	1	200	V
			17.227218	52.85	PK-U	41.4	-40.08	0	54.17	-	-	88.2	-34.03	1	200	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

WORST-CASE HARMONICS AND SPURIOUS EMISSIONS

802.11be EHT160 / 6185 MHz / 2TX CDD / RU996+484T:

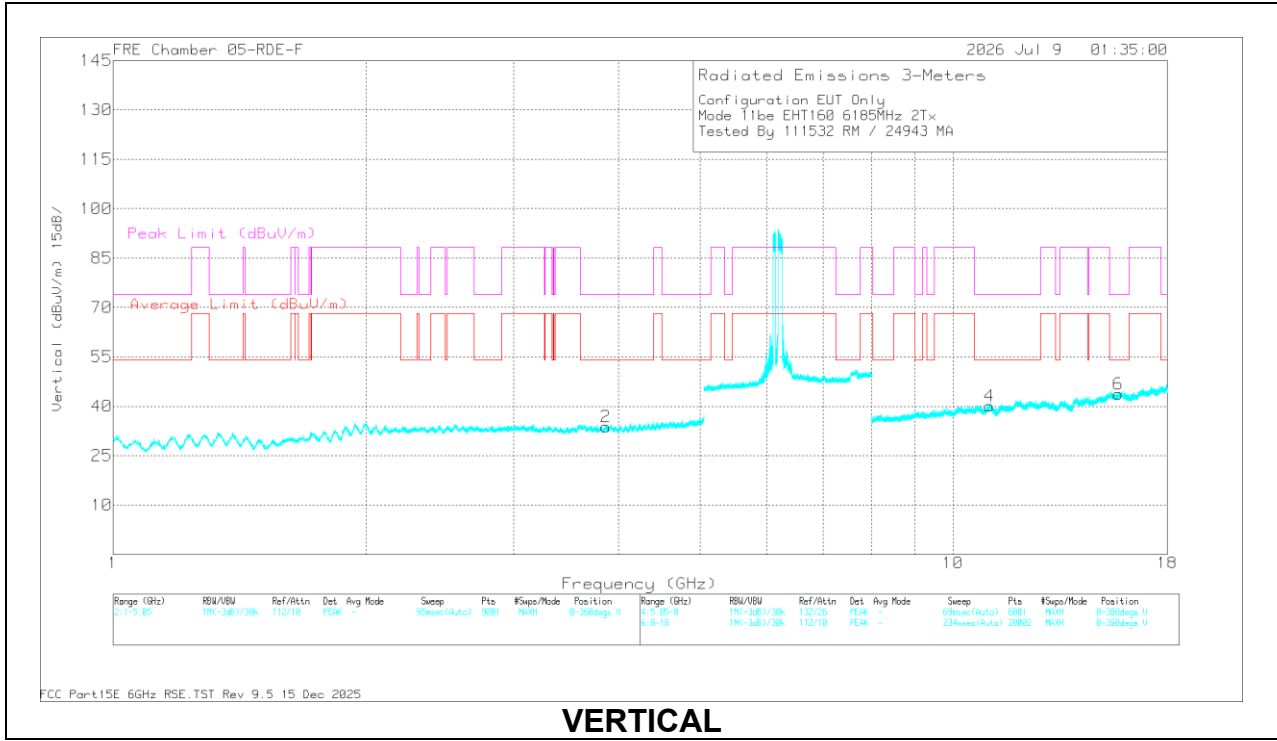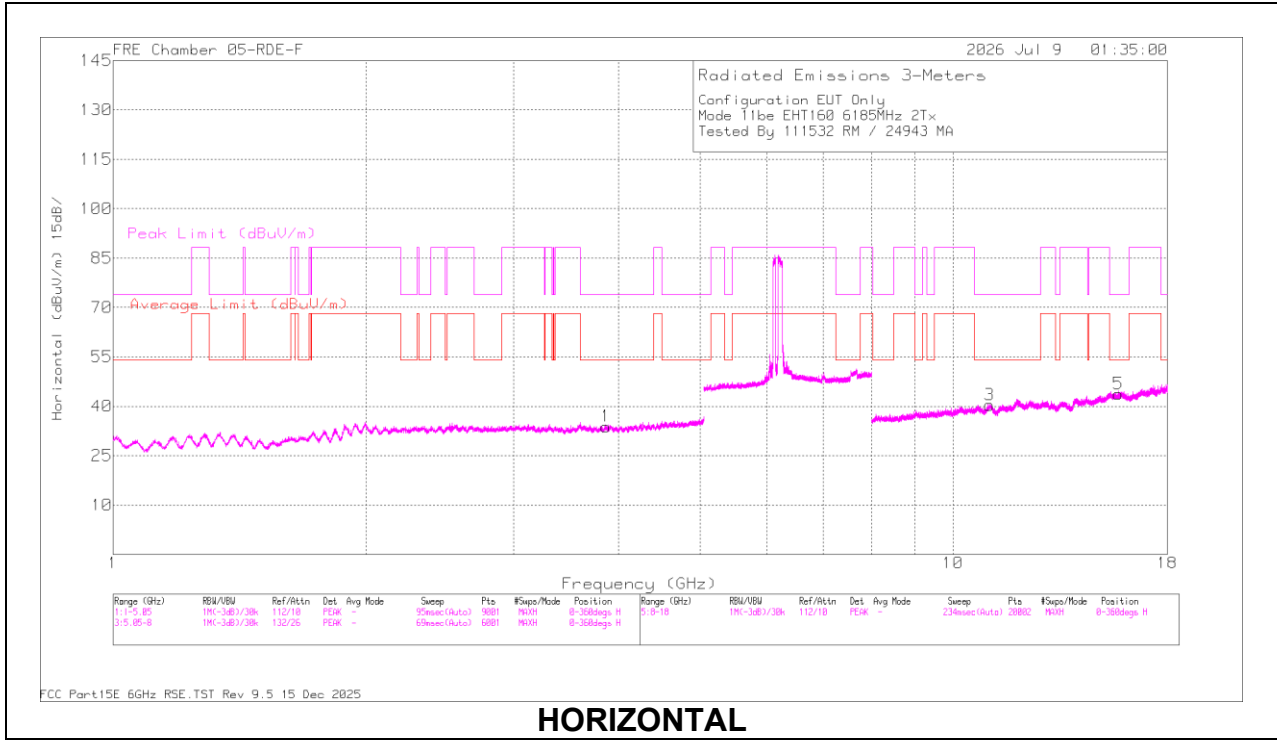

RADIATED EMISSIONS



Frequency (GHz)	Meter Reading (dBuV)	Det	41112 ACF (dB/m)	Gain/Loss (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 11.056899	56.36	PK-U	37.6	-43.71	0	50.25	-	-	74	-23.75	0	200	H
* 11.06615	55.93	PK-U	37.6	-43.3	0	50.23	-	-	74	-23.77	0	101	V
* 11.070858	44.1	ADR	37.6	-43.2	0	38.5	54	-15.5	-	-	0	200	H
* 11.074177	44.14	ADR	37.6	-43.2	0	38.54	54	-15.46	-	-	0	101	V
* 15.739921	52.95	PK-U	41.2	-41.2	0	52.95	-	-	74	-21.05	0	200	V
* 15.740261	53.08	PK-U	41.2	-41.2	0	53.08	-	-	74	-20.92	0	101	H
* 15.740585	41.4	ADR	41.2	-41.2	0	41.4	54	-12.6	-	-	0	200	V
* 15.752052	41.21	ADR	41.2	-41.1	0	41.31	54	-12.69	-	-	0	101	H
* 3.855549	46.18	ADR	33.4	-47.2	0	32.38	54	-21.62	-	-	0	100	H
* 3.859131	58.46	PK-U	33.4	-47.21	0	44.65	-	-	74	-29.35	0	200	V
* 3.864757	46.3	ADR	33.4	-47.3	0	32.4	54	-21.6	-	-	0	200	V
* 3.869885	58.08	PK-U	33.5	-47.3	0	44.28	-	-	74	-29.72	0	100	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.3. WORST CASE BELOW 1 GHz

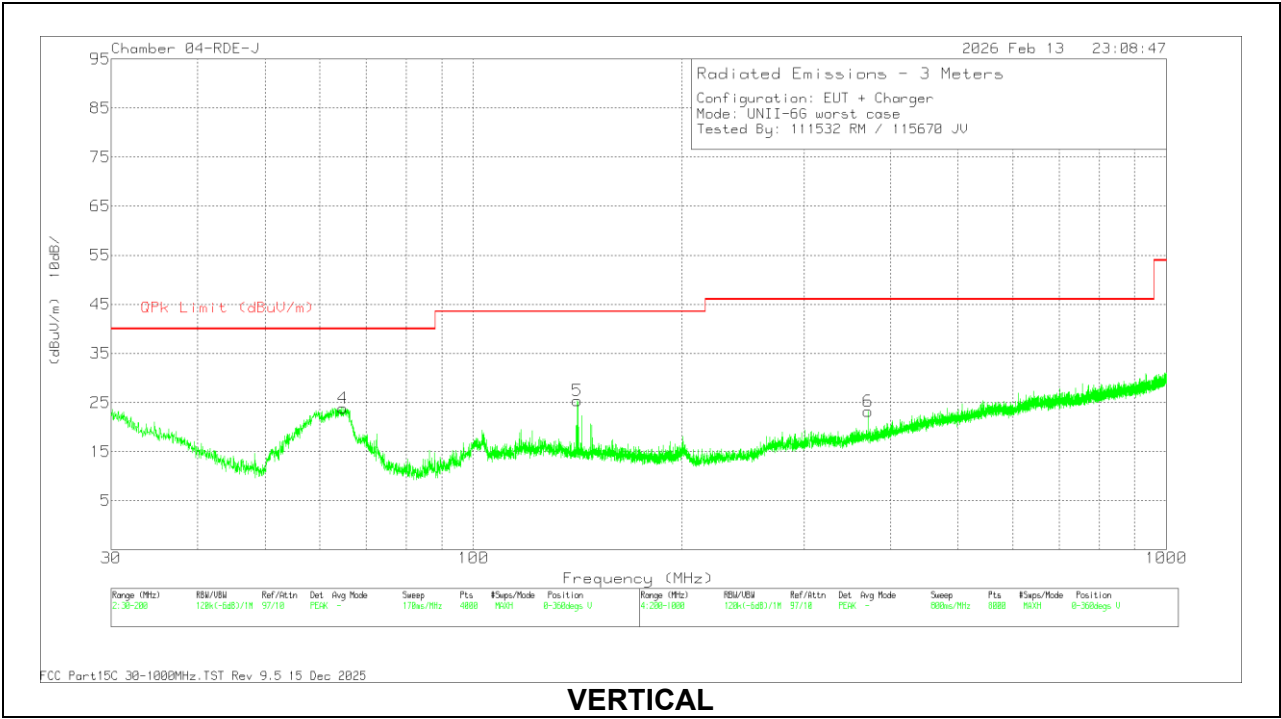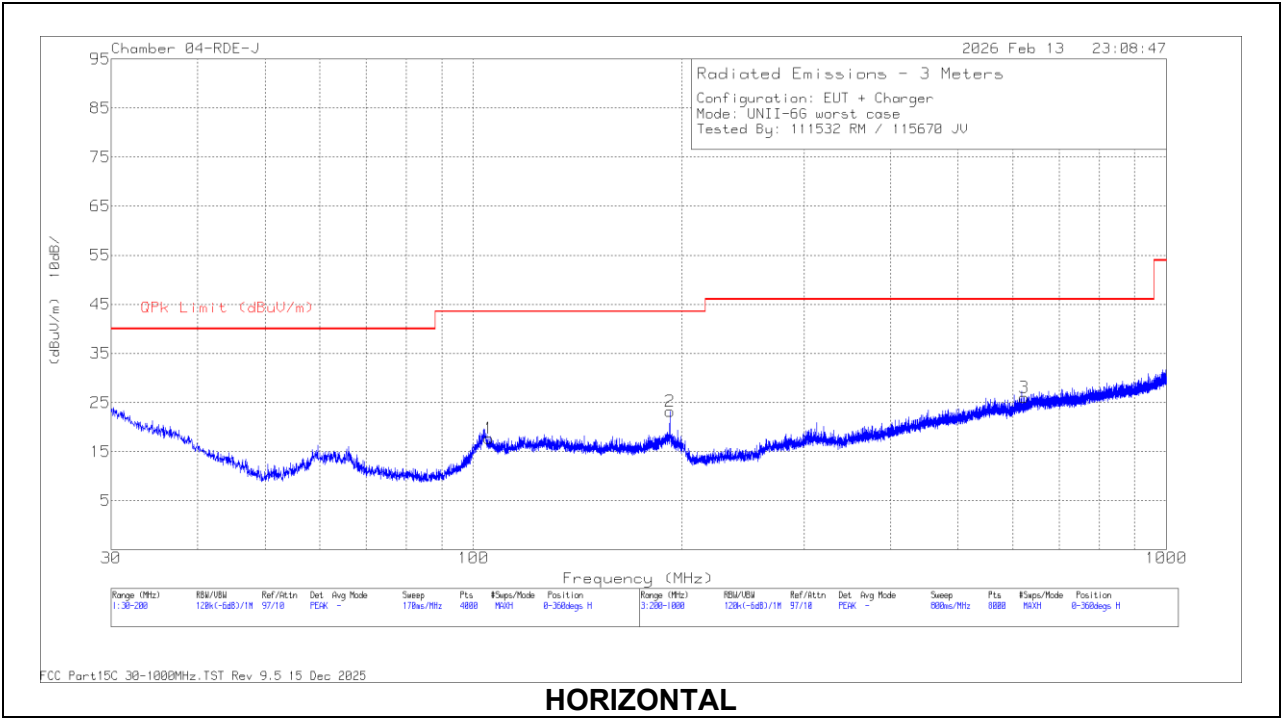



RADIATED EMISSIONS**Trace Markers**

Frequency (MHz)	Meter Reading (dBuV)	Det	202329 ACF (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
105.159	31.38	Pk	17.5	-31.2	17.68	43.52	-25.84	0-360	299	H
192.094	36.6	Pk	17.3	-30.7	23.2	43.52	-20.32	0-360	198	H
623.155	30.44	Pk	25.1	-29.5	26.04	46.02	-19.98	0-360	298	H
64.6608	37.56	Qp	13.8	-31.4	19.96	40	-20.04	29	102	V
141.294	37.47	Pk	18.9	-31	25.37	43.52	-18.15	0-360	100	V
371.222	32.48	Pk	20.7	-30	23.18	46.02	-22.84	0-360	298	V

Pk - Peak detector

QP- Quasi Peak detector

1.4. WORST CASE 18-26 GHz

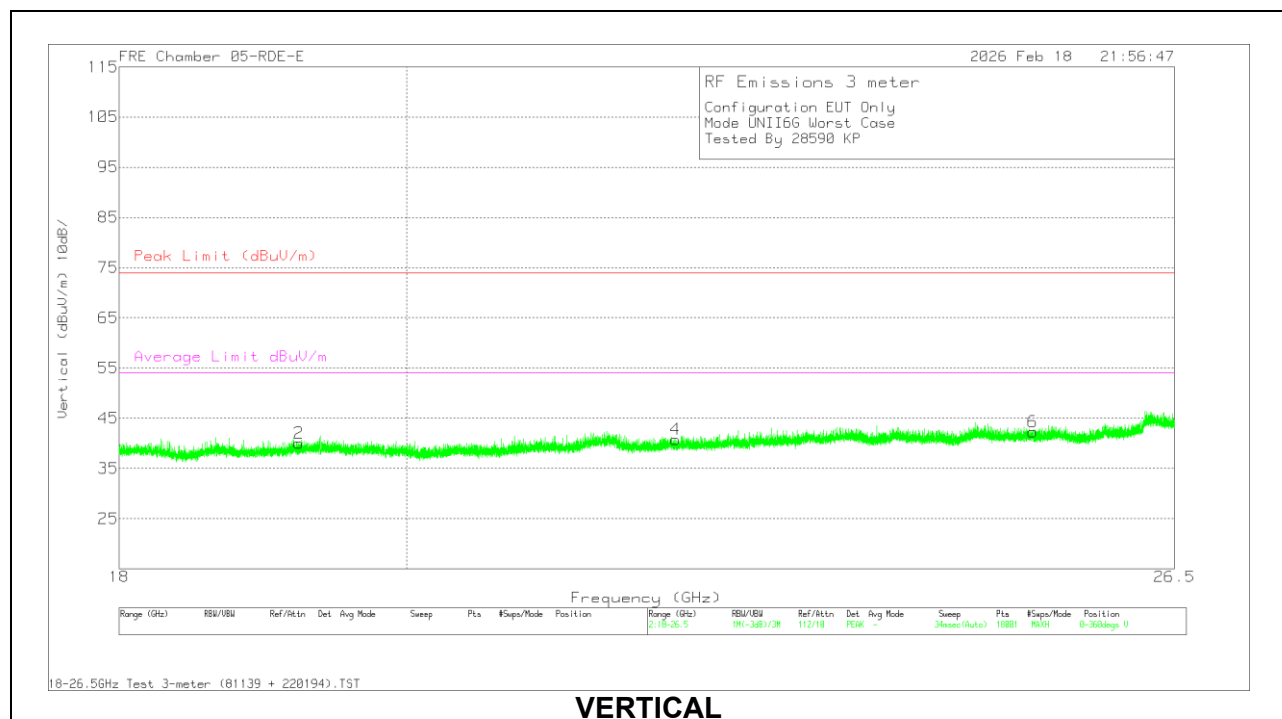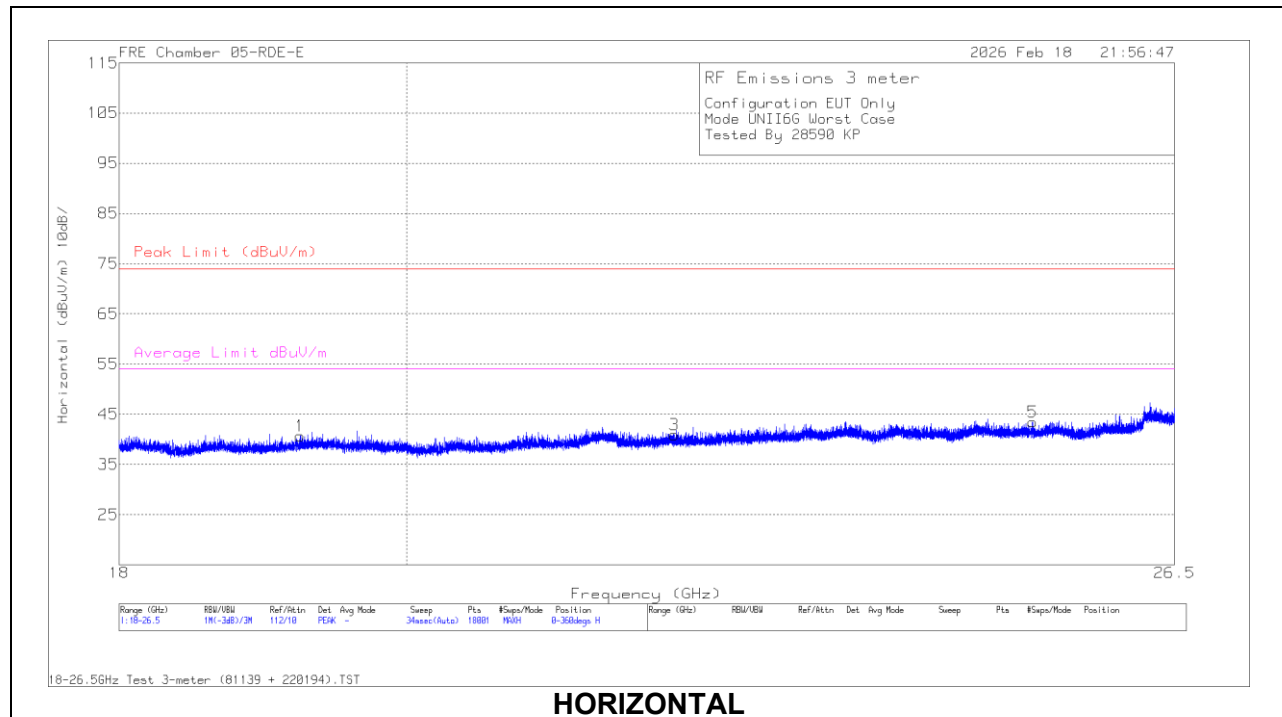

RADIATED EMISSIONS



Frequency (GHz)	Meter Reading (dBuV)	Det	81139 ACF (dB/m)	CBL/AMP (dB)	DCCF	CBL (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Average Limit dBuV/m	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 19.226256	47.11	PK-U	32.6	-62.3	0	23.9	41.31	74	-32.69	-	-	360	101	V
* 19.227546	35.66	ADR	32.6	-62.3	0	23.9	29.86	-	-	54	-24.14	360	101	V
* 19.234518	35.51	ADR	32.6	-62.3	0	23.9	29.71	-	-	54	-24.29	360	101	H
* 19.234603	47.03	PK-U	32.6	-62.3	0	23.9	41.23	74	-32.77	-	-	360	101	H
* 22.062632	34.06	ADR	33.4	-62.4	0	25.9	30.96	-	-	54	-23.04	360	200	H
* 22.064825	45.78	PK-U	33.4	-62.4	0	25.9	42.68	74	-31.32	-	-	360	200	H
* 22.070058	34.21	ADR	33.4	-62.4	0	25.9	31.11	-	-	54	-22.89	360	101	V
* 22.073752	46.31	PK-U	33.4	-62.4	0	25.9	43.21	74	-30.79	-	-	360	101	V
25.155606	44.82	PK-U	33.9	-62.8	0	27.9	43.82	74	-30.18	-	-	360	101	H
25.157145	33.28	ADR	33.9	-62.8	0	27.9	32.28	-	-	54	-21.72	360	101	H
25.15851	33.49	ADR	33.9	-62.8	0	27.9	32.49	-	-	54	-21.51	360	200	V
25.159857	44.86	PK-U	33.9	-62.8	0	27.9	43.86	74	-30.14	-	-	360	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.5. WORST CASE 26-40 GHz

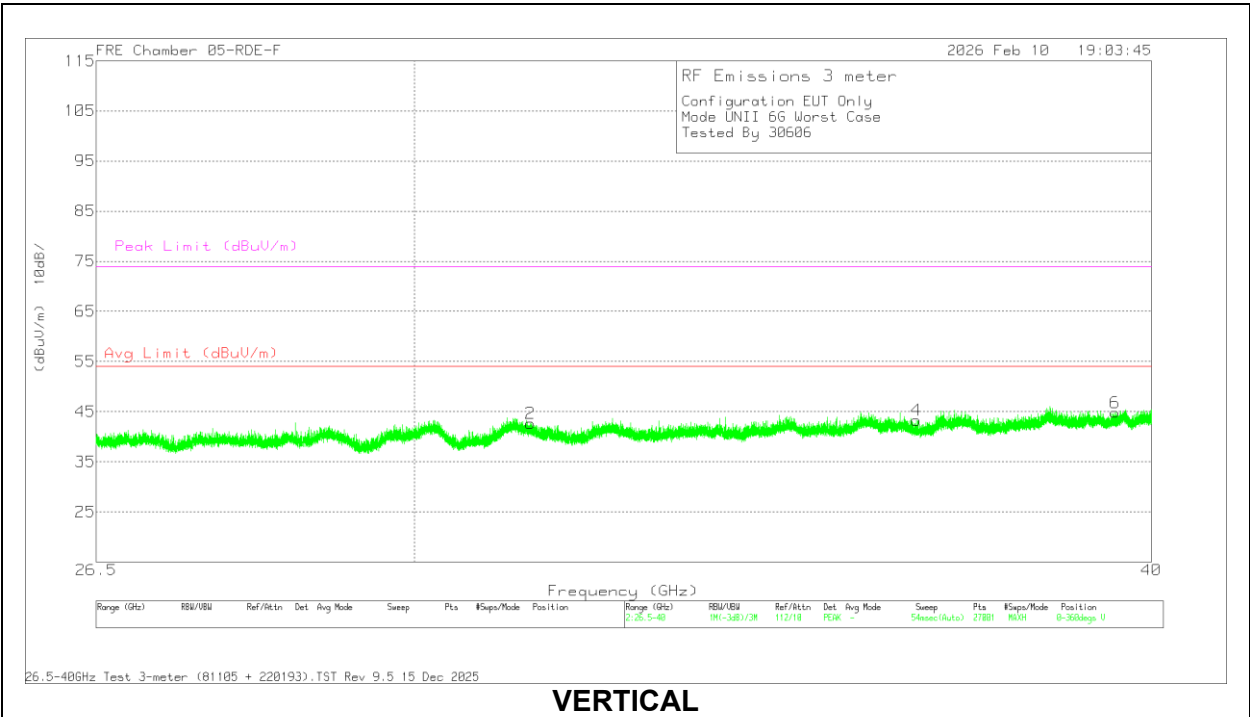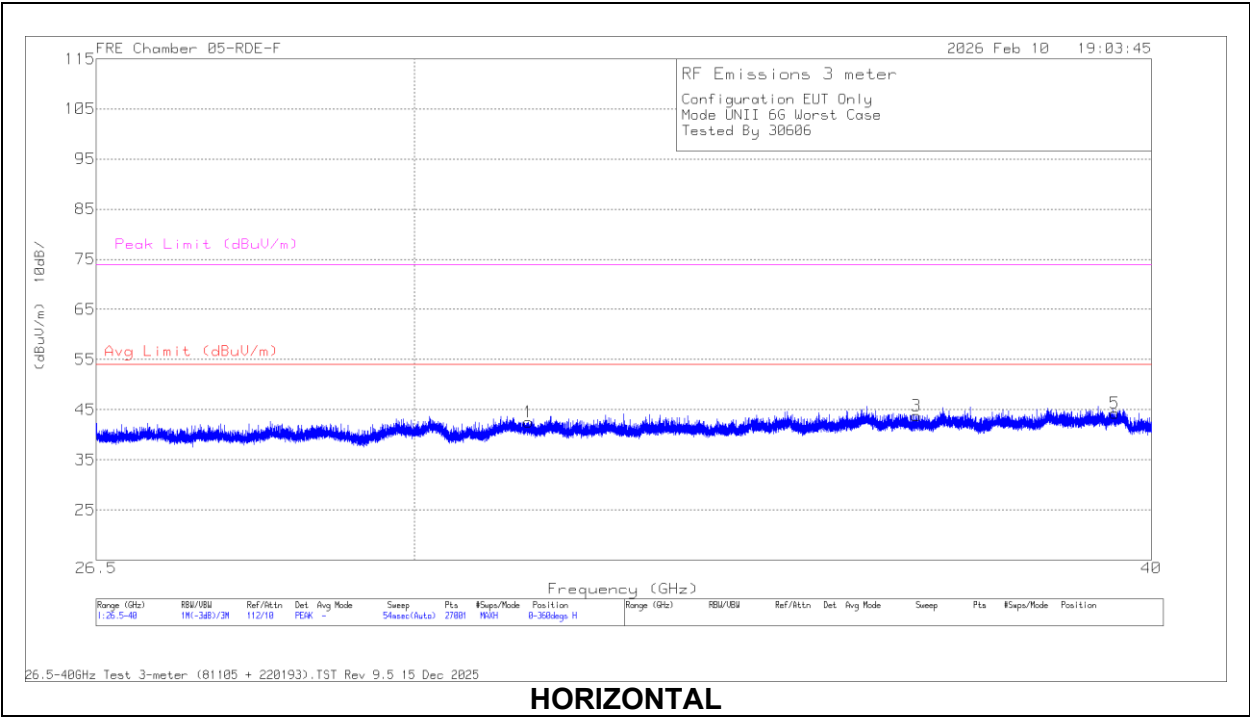

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	81105 ACF (dB/m)	CBL/AMP (dB)	Cbl (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 31.370969	51.95	PK-U	36.5	-61.6	17.3	0	44.15	-	-	74	-29.85	360	101	H
* 31.368723	40.38	ADR	36.5	-61.6	17.3	0	32.58	54	-21.42	-	-	360	101	H
* 36.49412	55.09	PK-U	37.4	-65.5	19	0	45.99	-	-	74	-28.01	360	101	H
* 36.489859	42.86	ADR	37.4	-65.6	19	0	33.66	54	-20.34	-	-	360	101	H
* 39.429145	52.85	PK-U	38	-64.3	20	0	46.55	-	-	74	-27.45	360	101	H
* 39.43345	41.01	ADR	38	-64.3	20	0	34.71	54	-19.29	-	-	360	101	H
* 31.393627	51.94	PK-U	36.5	-61.6	17.3	0	44.14	-	-	74	-29.86	360	200	V
* 31.395233	40.28	ADR	36.5	-61.6	17.3	0	32.48	54	-21.52	-	-	360	200	V
* 36.493074	53.22	PK-U	37.4	-65.5	19	0	44.12	-	-	74	-29.88	360	200	V
* 36.491992	41.9	ADR	37.4	-65.5	19	0	32.8	54	-21.2	-	-	360	200	V
* 39.439757	52.38	PK-U	38	-64.3	20	0	46.08	-	-	74	-27.92	360	101	V
* 39.435926	40.96	ADR	38	-64.3	20	0	34.66	54	-19.34	-	-	360	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

2. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 8.8

Frequency of Emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

TEST PROCEDURE

ANSI C63.10, Section 6.2

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.


The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both HOT(L1) and NEUTRAL(L2) lines.

RESULTS

2.1. EUT WITH AC ADAPTER


LINE 1 RESULTS

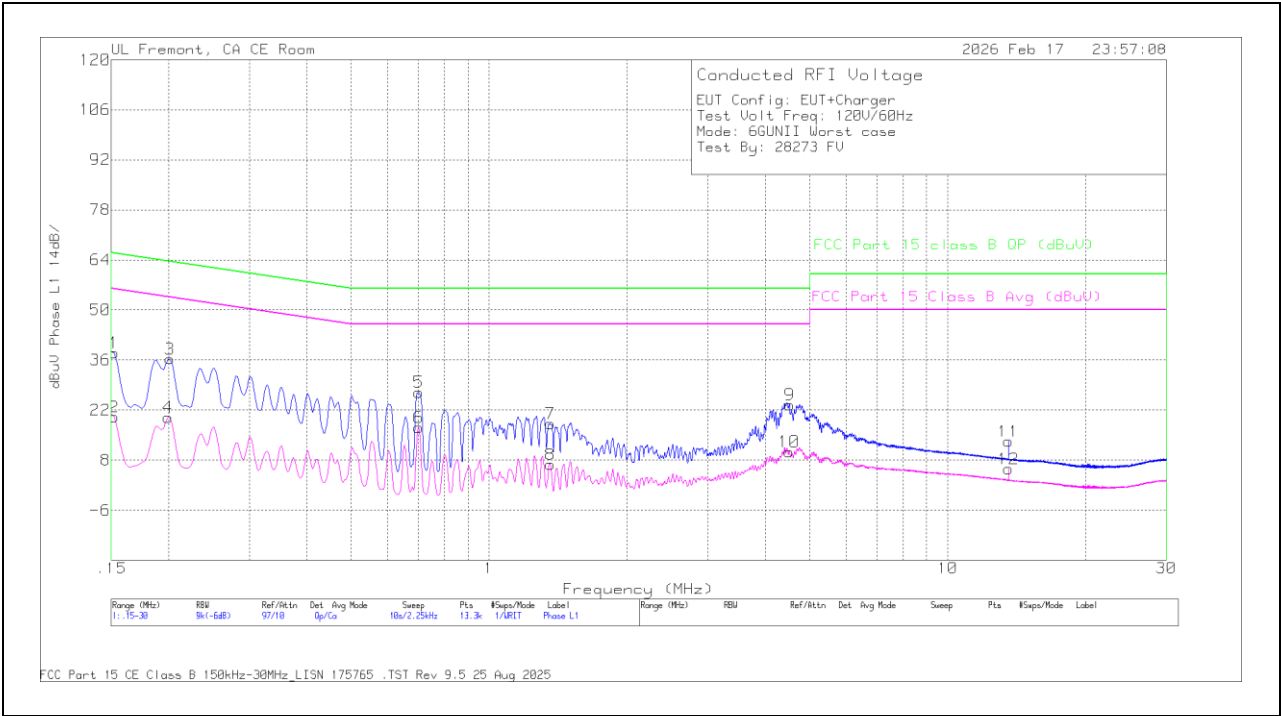

Range 1: Phase L1 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Cbl (dB)	LISN (dB)	10dB Atten (dB)	Corrected Reading dBuV	FCC Part 15 Class B Avg (dBuV)	Margin (dB)	FCC Part 15 class B QP (dBuV)	Margin (dB)
2	.1523	9.94	Ca	0	.1	10	20.04	55.88	-35.84	-	-
4	.1995	9.85	Ca	0	.1	10	19.95	53.63	-33.68	-	-
6	.7035	7.03	Ca	.1	0	10	17.13	46	-28.87	-	-
8	1.3605	-3.37	Ca	.1	0	10	6.73	46	-39.27	-	-
10	4.5173	.12	Ca	.2	0	10	10.32	46	-35.68	-	-
12	13.56	-4.81	Ca	.2	.1	10	5.49	50	-44.51	-	-
1	.1523	27.89	Qp	0	.1	10	37.99	-	-	65.88	-27.89
3	.2018	26.32	Qp	0	0	10	36.32	-	-	63.54	-27.22
5	.7035	16.89	Qp	.1	0	10	26.99	-	-	56	-29.01
7	1.3605	8.05	Qp	.1	0	10	18.15	-	-	56	-37.85
9	4.5195	13.32	Qp	.2	0	10	23.52	-	-	56	-32.48
11	13.56	2.9	Qp	.2	.1	10	13.2	-	-	60	-46.8

Qp - Quasi-Peak detector
Ca - CISPR average detection


LINE 2 RESULTS

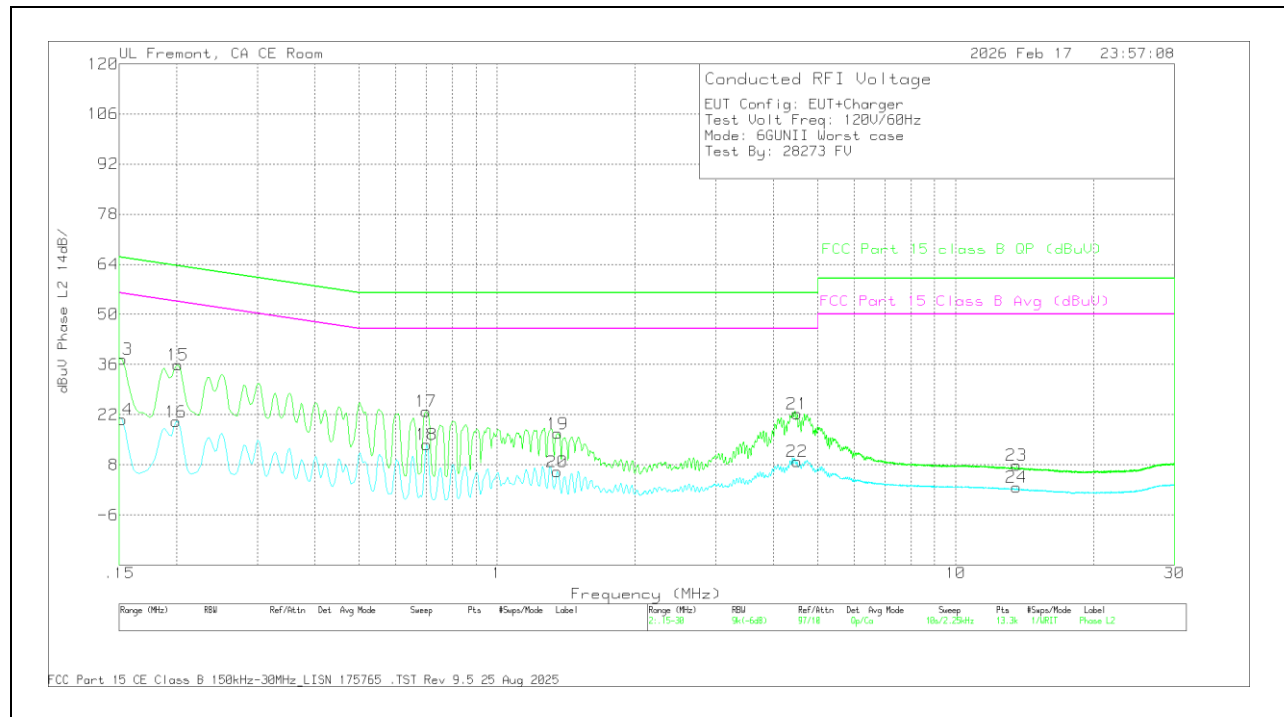

Range 2: Phase L2 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Cbl (dB)	LISN (dB)	10dB Atten (dB)	Corrected Reading dBuV	FCC Part 15 Class B Avg (dBuV)	Margin (dB)	FCC Part 15 class B QP (dBuV)	Margin (dB)
14	.1523	10.56	Ca	0	.1	10	20.66	55.88	-35.22	-	-
16	.1995	10.03	Ca	0	0	10	20.03	53.63	-33.6	-	-
18	.7035	3.57	Ca	.1	0	10	13.67	46	-32.33	-	-
20	1.3538	-4.08	Ca	.1	0	10	6.02	46	-39.98	-	-
22	4.5083	-1.33	Ca	.2	0	10	8.87	46	-37.13	-	-
24	13.56	-8.56	Ca	.2	.1	10	1.74	50	-48.26	-	-
13	.1523	27.39	Qp	0	.1	10	37.49	-	-	65.88	-28.39
15	.2018	25.86	Qp	0	0	10	35.86	-	-	63.54	-27.68
17	.7013	12.76	Qp	.1	0	10	22.86	-	-	56	-33.14
19	1.356	6.6	Qp	.1	0	10	16.7	-	-	56	-39.3
21	4.5173	12.01	Qp	.2	0	10	22.21	-	-	56	-33.79
23	13.56	-2.48	Qp	.2	.1	10	7.82	-	-	60	-52.18

Qp - Quasi-Peak detector

Ca - CISPR average detection

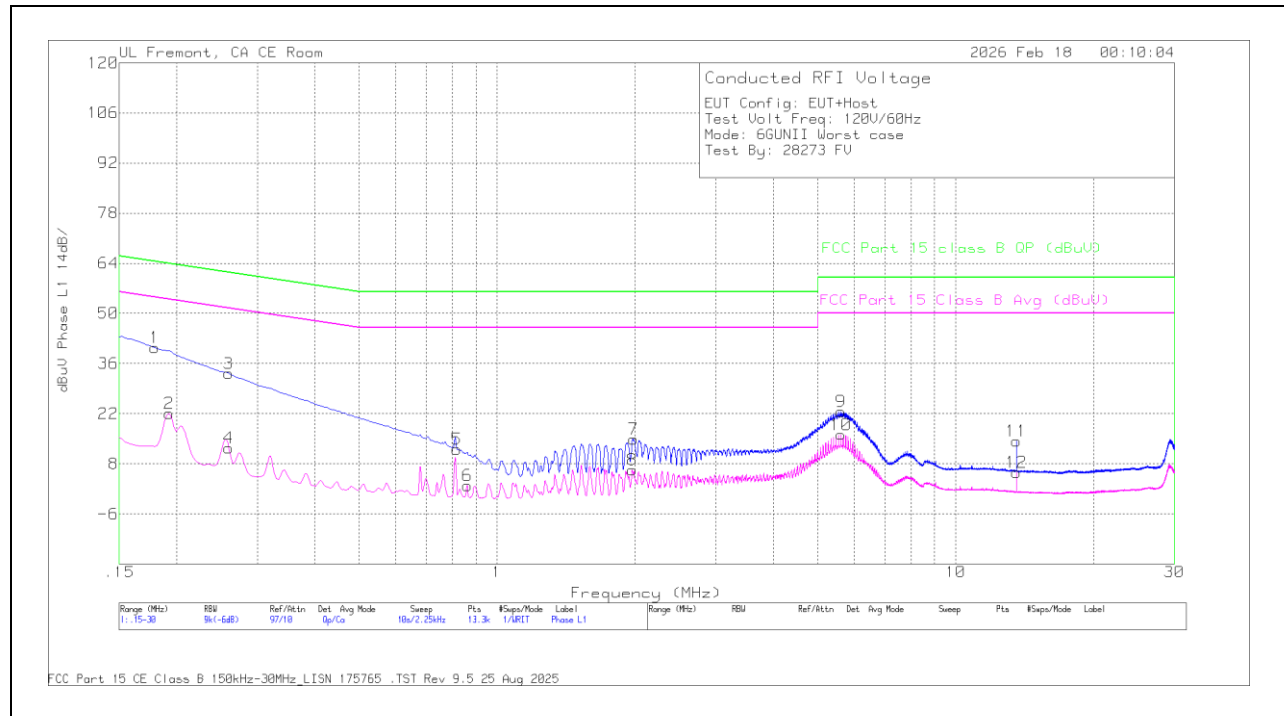
2.2. EUT WITH LAPTOP**LINE 1 RESULTS****Range 1: Phase L1 .15 - 30MHz**

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Cbl (dB)	LISN (dB)	10dB Atten (dB)	Corrected Reading (dBuV)	FCC Part 15 Class B Avg (dBuV)	Margin (dB)	FCC Part 15 class B QP (dBuV)	Margin (dB)
2	.1928	11.9	Ca	0	.1	10	22	53.92	-31.92	-	-
4	.2603	2.48	Ca	0	0	10	12.48	51.42	-38.94	-	-
6	.861	-8.19	Ca	.1	0	10	1.91	46	-44.09	-	-
8	1.9703	-3.81	Ca	.1	0	10	6.29	46	-39.71	-	-
10	5.6198	5.97	Ca	.2	0	10	16.17	50	-33.83	-	-
12	13.56	-4.66	Ca	.2	.1	10	5.64	50	-44.36	-	-
1	.1793	30.34	Qp	0	.1	10	40.44	-	-	64.52	-24.08
3	.2603	23.19	Qp	0	0	10	33.19	-	-	61.42	-28.23
5	.8183	1.89	Qp	.1	0	10	11.99	-	-	56	-44.01
7	1.9838	4.74	Qp	.1	0	10	14.84	-	-	56	-41.16
9	5.622	12.36	Qp	.2	0	10	22.56	-	-	60	-37.44
11	13.56	4.06	Qp	.2	.1	10	14.36	-	-	60	-45.64

Qp - Quasi-Peak detector

Ca - CISPR average detection

LINE 2 RESULTS

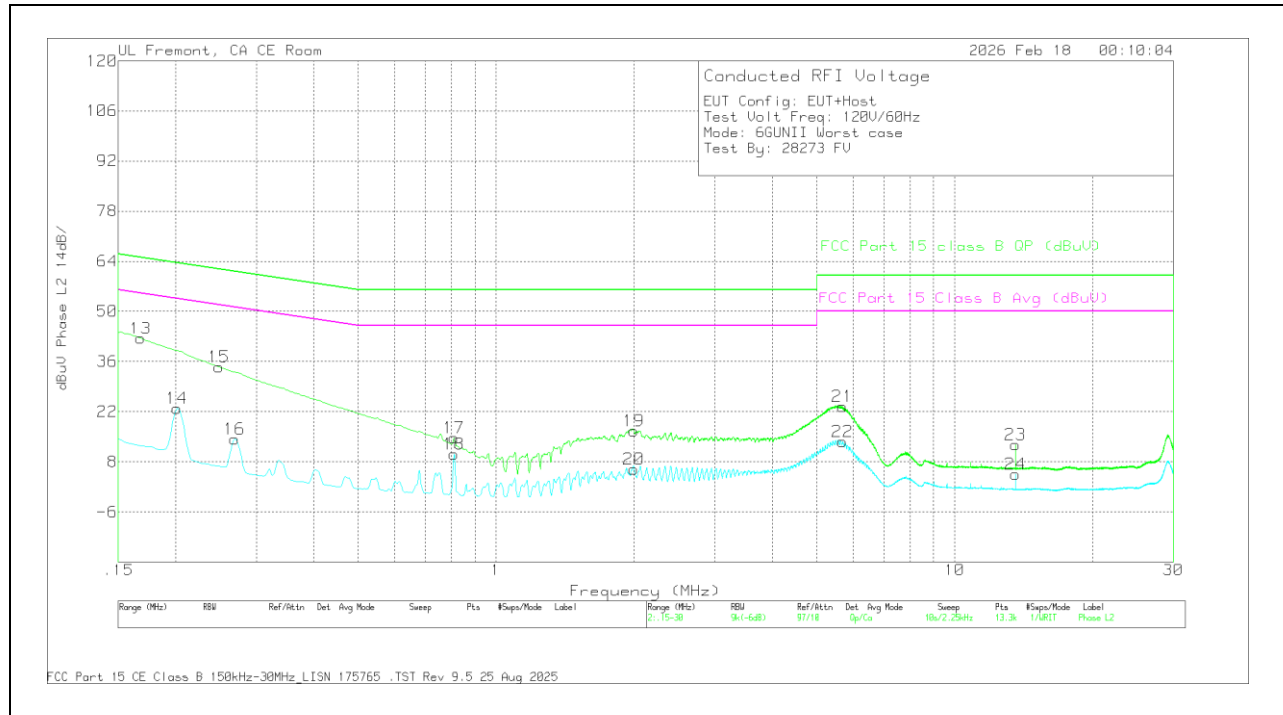

Range 2: Phase L2 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Cbl (dB)	LISN (dB)	10dB Atten (dB)	Corrected Reading dBuV	FCC Part 15 Class B Avg (dBuV)	Margin (dB)	FCC Part 15 class B QP (dBuV)	Margin (dB)
14	.2018	12.88	Ca	0	0	10	22.88	53.54	-30.66	-	-
16	.2693	4.29	Ca	0	0	10	14.29	51.14	-36.85	-	-
18	.8093	.06	Ca	.1	0	10	10.16	46	-35.84	-	-
20	1.9995	-4.15	Ca	.1	0	10	5.95	46	-40.05	-	-
22	5.6996	3.39	Ca	.2	0	10	13.59	50	-36.41	-	-
24	13.56	-5.74	Ca	.2	.1	10	4.56	50	-45.44	-	-
13	.168	32.37	Qp	0	.1	10	42.47	-	-	65.06	-22.59
15	.249	24.5	Qp	0	0	10	34.5	-	-	61.79	-27.29
17	.8093	4.59	Qp	.1	0	10	14.69	-	-	56	-41.31
19	1.9995	6.46	Qp	.1	0	10	16.56	-	-	56	-39.44
21	5.6985	13.26	Qp	.2	0	10	23.46	-	-	60	-36.54
23	13.56	2.48	Qp	.2	.1	10	12.78	-	-	60	-47.22

Qp - Quasi-Peak detector

Ca - CISPR average detection

3. SETUP PHOTOS

Please refer to 15982152-EP1 for setup photos

END OF TEST REPORT