

TEST REPORT

Report Number: 15982152 – E1V2

Applicant : APPLE INC.
1 APPLE PARK WAY
CUPERTINO, CA 95014, U.S.A.

Model : A3472 (Parent)
A3713, A3714, A3715 (Variants)

Brand : APPLE

FCC ID : BCG-E9186A (Parent)
BCG-E9192A, BCG-E9193A, BCG-E9194A (Variants)

IC : 579C-E9186A (Parent)
579C-E9192A, 579C-E9193A, 579C-E9194A (Variants)

EUT Description : SMARTPHONE

Test Standard(s) : FCC 47 CFR PART 15 SUBPART C
ISED RSS-247 ISSUE 4
ISED RSS-GEN ISSUE 5 + A1 + A2

Date Of Issue:

2026-06-25

Prepared by:

UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538 U.S.A.
TEL: (510) 319-4000
FAX: (510) 661-0888



REPORT REVISION HISTORY

Rev.	Issue Date	Revisions	Revised By
V1	2026-06-18	Initial Issue	--
V2	2026-06-25	Addressed TCB Questions: Sections 6, 8, 9	Chris Xiong

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
2. TEST RESULTS SUMMARY	6
3. TEST METHODOLOGY	6
4. FACILITIES AND ACCREDITATION	6
5. DECISION RULES AND MEASUREMENT UNCERTAINTY	7
5.1. METROLOGICAL TRACEABILITY	7
5.2. DECISION RULES	7
5.3. MEASUREMENT UNCERTAINTY	7
5.4. SAMPLE CALCULATION	7
6. EQUIPMENT UNDER TEST	8
6.1. EUT DESCRIPTION	8
6.2. MAXIMUM OUTPUT POWER	8
6.3. DESCRIPTION OF AVAILABLE ANTENNAS AND CABLE LOSS	8
6.4. SOFTWARE AND FIRMWARE	8
6.5. WORST-CASE CONFIGURATION AND MODE	9
6.6. DESCRIPTION OF TEST SETUP	10
7. TEST AND MEASUREMENT EQUIPMENT	14
8. ANTENNA PORT TEST RESULTS	15
8.1. ON TIME AND DUTY CYCLE	15
8.2. 20 dB AND 99% BANDWIDTH	16
8.3. HOPPING FREQUENCY SEPARATION	18
8.3.1. BDR (GFSK) – HIGH POWER	19
8.3.1. EDR (8PSK) – HIGH POWER	19
8.3.2. BTCSM2 – HIGH POWER	20
8.4. NUMBER OF HOPPING CHANNELS	21
8.4.1. BDR (GFSK) – HIGH POWER	22
8.4.1. BTCSM2 – HIGH POWER	24
8.5. AVERAGE TIME OF OCCUPANCY	26
8.5.1. BDR (GFSK) – HIGH POWER	27
8.5.2. BTCSM2 – HIGH POWER	31
8.6. OUTPUT POWER	33
8.6.1. SISO	35
8.6.2. MIMO TXBF	36
8.7. AVERAGE OUTPUT POWER	37
8.7.1. SISO	38
8.7.2. MIMO TXBF	39

8.8. CONDUCTED SPURIOUS EMISSIONS	40
8.8.1. BDR (GFSK) – HIGH POWER – SISO	41
8.8.2. BDR (GFSK) – HIGH POWER – MIMO TXBF	45
8.8.3. EDR (8PSK) – HIGH POWER – SISO	49
8.8.4. EDR (8PSK) – HIGH POWER – MIMO TXBF	53
8.8.5. BTCSM2 – HIGH POWER – SISO	57
8.8.6. BDR (GFSK) – LOW POWER – SISO	61
8.8.7. BDR (GFSK) – LOW POWER – MIMO TXBF	65
8.8.8. EDR (8PSK) – LOW POWER – SISO	69
8.8.9. EDR (8PSK) – LOW POWER – MIMO TXBF	73
8.8.10. BTCSM2 – LOW POWER – SISO	77
9. RADIATED TEST RESULTS	81
9.1. TRANSMITTER ABOVE 1 GHz	83
9.1.1. LOW BAND EDGE – HIGH POWER – SISO	83
9.1.2. LOW BAND EDGE – HIGH POWER – MIMO TXBF	84
9.1.3. LOW BAND EDGE – LOW POWER – SISO	85
9.1.4. LOW BAND EDGE – LOW POWER – MIMO TXBF	86
9.1.5. LOW BAND EDGE – WORST-CASE	87
9.1.6. HIGH BAND EDGE – HIGH POWER – SISO	89
9.1.7. HIGH BAND EDGE – HIGH POWER – MIMO TXBF	90
9.1.8. HIGH BAND EDGE – LOW POWER – SISO	91
9.1.9. HIGH BAND EDGE – LOW POWER – MIMO TXBF	92
9.1.10. HIGH BAND EDGE – WORST-CASE	93
9.1.11. SPURIOUS EMISSIONS – HIGH POWER – SISO	95
9.1.12. SPURIOUS EMISSIONS – HIGH POWER – MIMO TXBF	97
9.1.13. SPURIOUS EMISSIONS – WORST-CASE	99
9.2. 30 MHz - 1 GHz – WORST-CASE	101
9.3. 18 GHz - 26 GHz – WORST-CASE	103
10. AC POWER LINE CONDUCTED EMISSIONS	105
10.1. AC POWER LINE WITH AC/DC ADAPTER	106
10.2. AC POWER LINE WITH LAPTOP	108
11. SETUP PHOTOS	110
12. APPENDIX A - SPOT CHECK EVALUATION	110
12.1. MODEL DIFFERENCES	110
12.2. SPOT CHECK VERIFICATION RESULTS SUMMARY FOR A3713	111
12.3. SPOT CHECK VERIFICATION RESULTS SUMMARY FOR A3714	111
12.4. SPOT CHECK VERIFICATION RESULTS SUMMARY FOR A3715	111

1. ATTESTATION OF TEST RESULTS

Applicant Name and Address	APPLE INC. 1 APPLE PARK WAY CUPERTINO, CA 95014, U.S.A.
Model	A3472 (Parent) A3713, A3714, A3715 (Variants)
Brand	APPLE
FCC ID	BCG-E9186A (Parent) BCG-E9192A, BCG-E9193A, BCG-E9194A (Variants)
IC	579C-E9186A (Parent) 579C-E9192A, 579C-E9193A, 579C-E9194A (Variants)
EUT Description	SMARTPHONE
Serial Number	C07HP3000UW0001AMR, C07HT4000FJ0001B9T (Conducted) LWQQJL6Y6X , KQF475QLT0 (Radiated)
Sample Receipt Date	2026-01-06
Date Tested	2026-01-12 to 2026-06-25
Applicable Standards	FCC 47 CFR Part 15 Subpart C ISED RSS-247 Issue 4 ISED RSS-GEN Issue 5 + A1 + A2
Test Results	COMPLIES
UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report. The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to ensure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise. This document may not be altered or revised in any way unless done so by UL Verification Services Inc., and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document.	
Approved & Released By: 	Prepared & Reviewed By: 
Frank Ibrahim Staff Engineer UL Verification Services Inc.	Chris Xiong Lab Supervisor UL Verification Services Inc.

2. TEST RESULTS SUMMARY

This report contains data provided by the customer, which can impact the validity of the results. UL Verification Services Inc. is only responsible for correctly integrating customer-provided data with measurements performed by UL Verification Services Inc.

Below is a list of the data provided by the customer:

1. Antenna gain and type (see Section 6.3)
2. Cable loss (see Section 6.3)

Requirement Description	Requirement Clause Number (FCC)	Requirement Clause Number (ISED)	Result
Duty Cycle	See Comment		Reporting purposes only
20dB BW / 99% OBW	N/A	RSS-GEN 6.7	Complies
Hopping Frequency Separation	15.247 (a)(1)	RSS-247 (6.2.1) (b)	Complies
Number of Hopping Channels	15.247 (a)(1)(iii)	RSS-247 (6.2.3.1) (b)	Complies
Average Time of Occupancy	15.247 (a)(1)(iii)	RSS-247 (6.2.3.1) (b)	Complies
Output Power	15.247 (a) (1) 15.247 (b) (1)	RSS-247 (6.2.3.1) RSS-247 (6.2.3.2)	Complies
Average Power	See Comment		Reporting purposes only
Conducted Spurious Emissions	15.247 (d)	RSS-247 (6.6)	Complies
Radiated Emissions	15.209, 15.205	RSS-GEN 8.9, 8.10	Complies
AC Mains Conducted Emissions	15.207	RSS-Gen 8.8	Complies

3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with:

- ANSI/USEMCSC C63.10-2020+Cor 1-2023 (FCC)
- FCC 47 CFR Part 2
- FCC 47 CFR Part 15C
- KDB 558074 D01 15.247 Meas Guidance
- KDB 414788 D01 Radiated Test Site
- KDB 662911 D01 Multiple Transmitter Output
- KDB 484596 D01 Referencing Test Data
- RSS-GEN Issue 5 + A1 + A2
- RSS-247 Issue 4
- ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 (ISED)

4. FACILITIES AND ACCREDITATION

UL Verification Services Inc. is accredited by A2LA, certification #0751.05, for all testing performed within the scope of this report. Testing was performed at the locations noted below.

	Address	ISED CABID	ISED Company Number	FCC Registration
☐	Building 1: 47173 Benicia Street, Fremont, CA 94538, USA	US0104	2324A	550739
☒	Building 2: 47266 Benicia Street, Fremont, CA 94538, USA			
☐	Building 3: 843 Auburn Court, Fremont, CA 94538, USA			
☒	Building 4: 47658 Kato Rd, Fremont, CA 94538, USA			
☐	Building 5: 47670 Kato Rd, Fremont, CA 94538, USA			

5. DECISION RULES AND MEASUREMENT UNCERTAINTY

5.1. METROLOGICAL TRACEABILITY

All test and measuring equipment utilized to perform the tests documented in this report are calibrated regularly, with a maximum time between calibrations of one year or the manufacturer's recommendation, whichever is less, and, where applicable, is traceable to recognized national standards.

5.2. DECISION RULES

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4:2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

5.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	U _{LAB}
Conducted Antenna Port Emission Measurement	1.94 dB
Time Domain Measurements Using SA	3.39 %
RF Power Measurement Direct Method Using Power Meter	0.450 dB (Average) 1.30 dB (Peak)
Radio Frequency (Spectrum Analyzer)	141.16 Hz
Occupied Bandwidth	1.22 %
Carrier Frequency Separation	19.70 Hz
Number of Hopping Frequencies	0.000 dB
Worst Case Conducted Disturbance, 9kHz to 0.15 MHz	3.78 dB
Worst Case Conducted Disturbance, 0.15 to 30 MHz	3.40 dB
Worst Case Radiated Disturbance, 9kHz to 30 MHz	2.87 dB
Worst Case Radiated Disturbance, 30 to 1000 MHz	6.01 dB
Worst Case Radiated Disturbance, 1000 to 18000 MHz	4.73 dB
Worst Case Radiated Disturbance, 18000 to 26000 MHz	4.51 dB

Uncertainty figures are valid to a confidence level of 95%.

5.4. SAMPLE CALCULATION

RADIATED EMISSIONS

Where relevant, the following sample calculation is provided:

Field Strength (dBuV/m) = Measured Voltage (dBuV) + Antenna Factor (dB/m) + Cable Loss (dB) – Preamp Gain (dB)

36.5 dBuV + 18.7 dB/m + 0.6 dB – 26.9 dB = 28.9 dBuV/m

MAINS CONDUCTED EMISSIONS

Where relevant, the following sample calculation is provided:

Final Voltage (dBuV) = Measured Voltage (dBuV) + Cable Loss (dB) + Limiter Factor (dB) + LISN Insertion Loss.

36.5 dBuV + 0 dB + 10.1 dB + 0 dB = 46.6 dBuV

6. EQUIPMENT UNDER TEST

6.1. EUT DESCRIPTION

The Apple iPhone is a smartphone with cellular GSM, GPRS, EGPRS, WCDMA, LTE, 5G NR1, 5G NR2, IEEE 802.11a/b/g/n/ac/ax/be, Bluetooth (BT), Ultra-Wideband (UWB), Global Positioning System (GPS), Near-Field Communication (NFC), Narrow-Band (NB) UNII, 802.15.4, 802.15.4ab-Narrow Band (NB), Wireless Power Transfer (WPT RX only) and Mobile Satellite Service (MSS) technologies. The rechargeable battery is not user accessible. This device is not user-serviceable and requires special tools to disassemble.

6.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum conducted output power as follows:

Frequency Range (MHz)	Mode	Antenna	Configuration	Output Power (dBm)	Output Power (mW)
2402 - 2480	BDR (GFSK)	ANT 4	High Power	20.01	100.23
		ANT 3	High Power	20.11	102.57
		BF, ANT 4 + ANT 3	High Power	20.08	101.86
2402 - 2480	EDR (DQPSK)	ANT 4	High Power	19.09	81.10
		ANT 3	High Power	19.15	82.22
		BF, ANT 4 + ANT 3	High Power	19.33	85.70
2402 - 2480	EDR (8PSK)	ANT 4	High Power	19.45	88.10
		ANT 3	High Power	19.44	87.90
		BF, ANT 4 + ANT 3	High Power	19.26	84.33
2402 - 2480	BTCM2	ANT 4	High Power	20.12	102.80
		ANT 3	High Power	20.14	103.28

6.3. DESCRIPTION OF AVAILABLE ANTENNAS AND CABLE LOSS

The antenna(s) gain and type (IFA), as provided by the manufacturer' are as follows:

Frequency Range (GHz)	Antenna Type	Antenna Peak Gain				Cable Loss	
		ANT 4 (dBi)	ANT 3 (dBi)	Uncorrelated Chains (dBi)	Correlated Chains (dBi)	ANT 4 (dB)	ANT 3 (dB)
2.4	IFA	0.50	-1.00	-1.80	0.50	1.63	1.75

The cables were used for RF antenna port tests that had been offset to the test equipment during testing.

6.4. SOFTWARE AND FIRMWARE

The EUT firmware and software installed during testing was 24A343.

6.5. WORST-CASE CONFIGURATION AND MODE

EUT was investigated in three orthogonal orientations X (Flatbed), Y (Landscape) and Z (Portrait). The following table exhibits the worst-case orientation. The full tests of the EUT have been made upon the orientations shown in the table below.

Band	ANT 4	ANT 3	ANT 4 + 3
2.4 GHz	X (Flatbed)	X (Flatbed)	X (Flatbed)

Radiated band edge, harmonic, and spurious emissions from 1 GHz to 18 GHz were performed with the EUT was set to transmit at highest power on Low/Middle/High channels.

Radiated emissions below 30MHz, below 1 GHz, 18-26GHz and power line conducted emissions were performed with the EUT transmits at the channel with the highest output power as worst-case scenario. There were no emissions found below 30MHz within 20dB of the limit.

For below 1 GHz tests, EUT was connected to AC power adapter as the worst case; and for above 1 GHz, the worst-case configuration reported was tested with EUT only. For AC line conducted emission, test was investigated with AC power adapter and with laptop.

All simultaneous transmission combinations have been investigated, and no signal emissions were observed.

BDR (GFSK), EDR (DQPSK), EDR (8PSK) and BTCSM2 average powers are all investigated, BDR (GFSK), EDR (8PSK) and BTCSM2 powers are the worst cases. For average power data, please refer to section 8.7.

Worst-case data rates as provided by the client were:

Configuration	Mode	Data Rate
SISO	BDR (GFSK)	1 Mbps
	EDR (8PSK)	3 Mbps
	BTCSM2	2 Mbps
TXBF (MIMO)	BDR (GFSK)	1 Mbps
	EDR (8PSK)	3 Mbps



The plots presented in this report are representative of the test methods and parameter settings used during the evaluation.



6.6. DESCRIPTION OF TEST SETUP


SUPPORT TEST EQUIPMENT						
Description		Manufacturer	Model	Serial Number		FCC ID/ DoC
Macbook Pro		Apple	A2992	DVJJ642FYM		BCGA2992
96W USB-C Power Adapter		Apple	A2166	C4H238408ABPMOWAV		DoC
Conducted Switch Box		UL	CSB	235779		N/A
20W USB-C Power Adapter		Apple	A2305	C4H951600C3PF4F4U		DoC
10dB Fixed Attenuator		Pasternack Enterprises	PE7087-10	236285		N/A
I/O CABLES (RF CONDUCTED TEST)						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	SMA	1	SMA	Shielded	0.2	To the spectrum Analyzer
2	Antenna	1	SMA	Shielded	0.2	EUT to Switchbox
3	USB	1	USB-C	Shielded	1.0	N/A
4	DC	1	DC	Shielded	2.0	N/A
5	Antenna	1	SMA	Shielded	0.1	EUT to Power Meter
I/O CABLES (RF RADIATED AND AC LINE CONDUCTED TEST)						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC	1	DC	Shielded	2.0	N/A
2	USB	1	USB-C	Shielded	1.0	N/A

TEST SETUP

The EUT setup is shown below. Test software exercised the radio card.

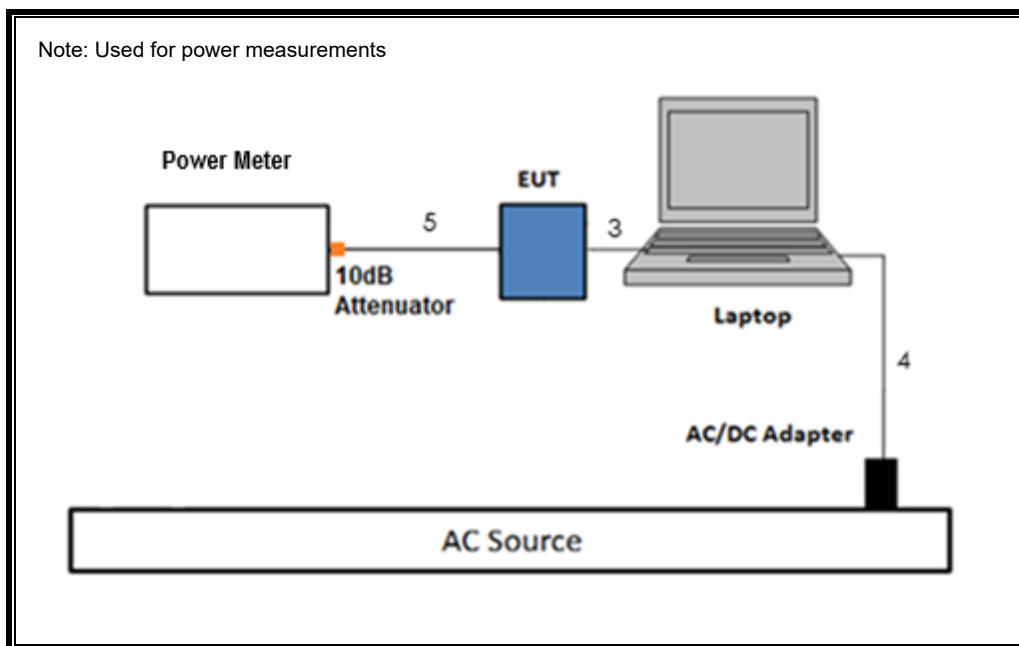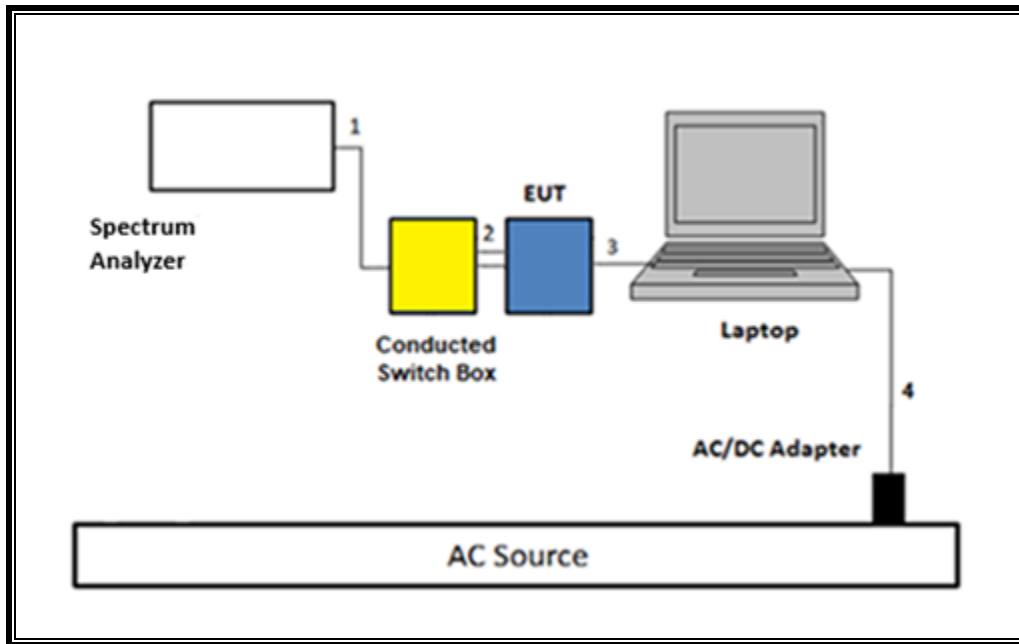SETUP DIAGRAM FOR CONDUCTED TESTS

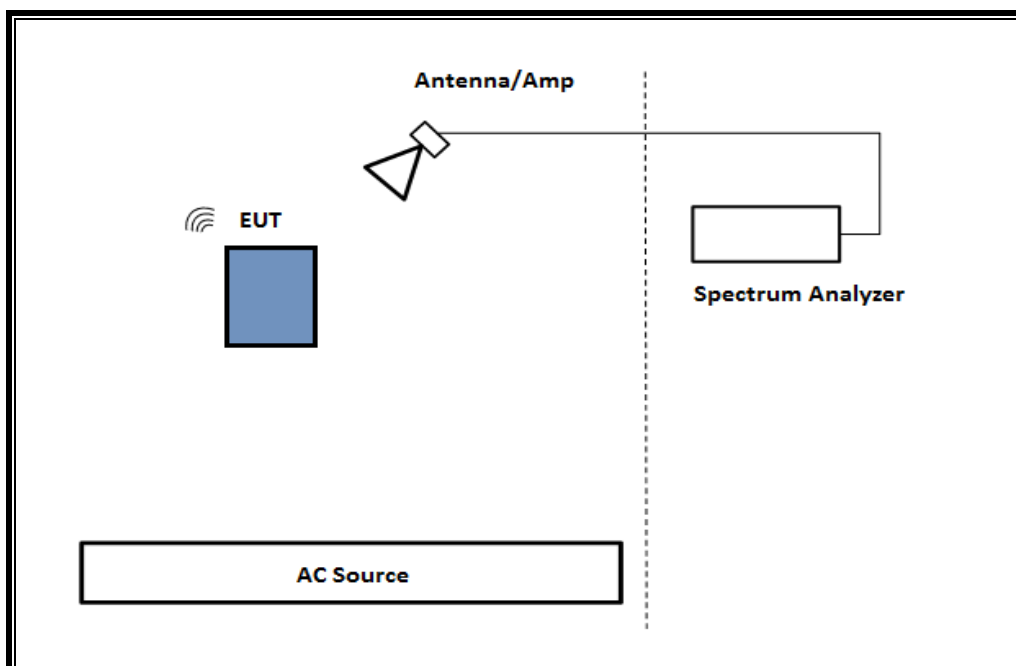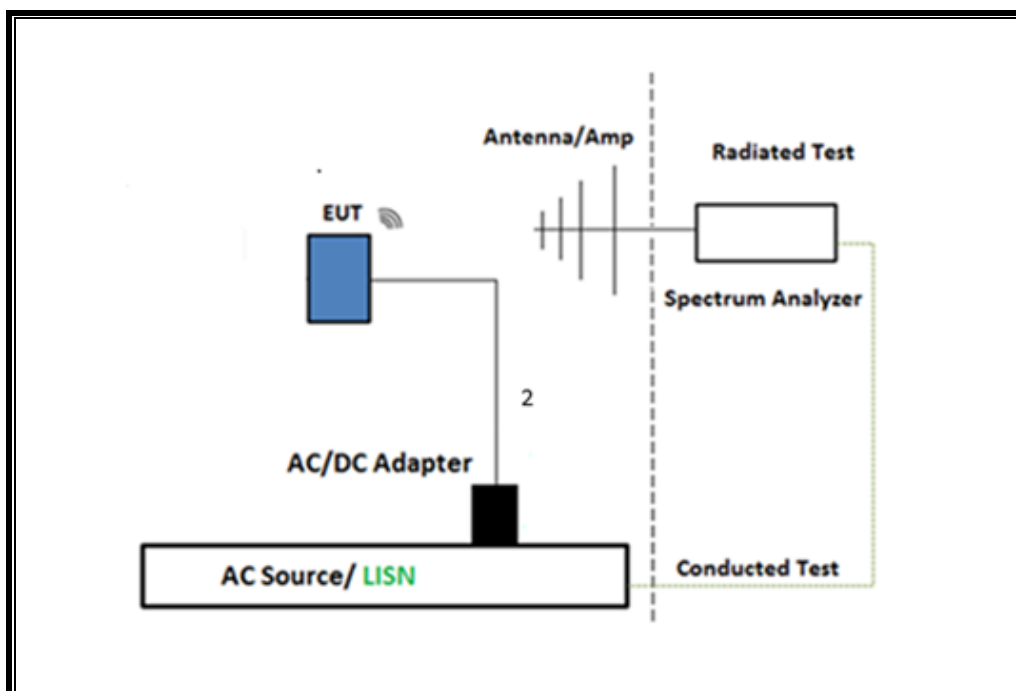SETUP DIAGRAM FOR RADIATED TESTS 1 GHz - 26 GHz**SETUP DIAGRAM FOR RADIATED TESTS 30 MHz - 1 GHz and AC LINE CONDUCTED TEST**

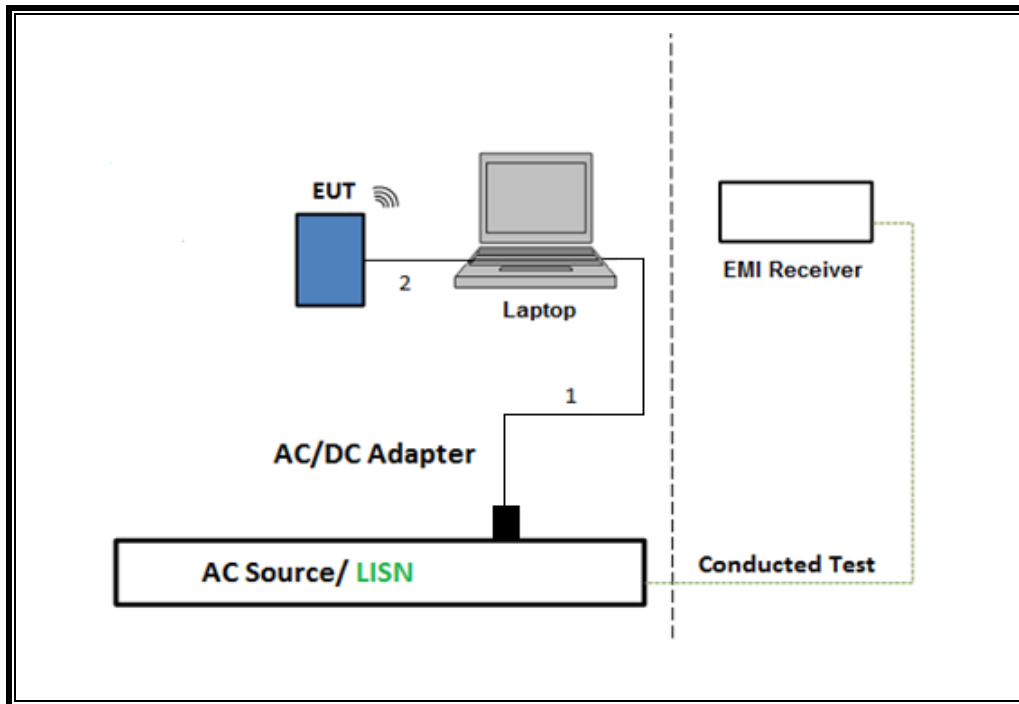TEST SETUP- AC LINE CONDUCTED: LAPTOP CONFIGURATION

7. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	ID Number	Cal Due
EMI TEST RECEIVER	Rohde & Schwarz	ESW44	191428	2027-02-28
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	226674	2027-03-31
Filter Box	UL-FR1	RATS 1.0, 2 Amp, 6 Port	250156	2026-10-30
EMI TEST RECEIVER	Rohde & Schwarz	ESW44	230548	2027-02-28
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	200896	2027-03-31
Filter Box	UL-FR1	Frankenstein, 1 Amp, 12 Port	216812	2026-06-30
EMI TEST RECEIVER	Rohde & Schwarz	ESW44	223461	2027-02-28
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	222741	2026-09-30
Filter Box	UL-FR1	Frankenstein, 1 Amp, 12 Port	217521	2026-09-30
EMI TEST RECEIVER	Rohde & Schwarz	ESW44	223460	2027-02-28
Antenna, Horn 18 to 26.5GHz	A.R.A.	MWH-1826/B	172363	2027-05-31
Amplifier Assembly, 18-26.5GHz, 60dB Gain	AMPLICAL	AMP18G26.5-60	171580	2027-06-30
EMI TEST RECEIVER	Rohde & Schwarz	ESW44	235670	2027-02-28
Antenna, BroadBand Hybrid, 30MHz to 3GHz	Sunol Sciences Corp.	JB3	174374	2027-06-30
Amplifier 9 KHz - 1 GHz	SONOMA INSTRUMENT	310N	230308	2027-02-28
EMI TEST RECEIVER	Rohde & Schwarz	ESW44	245268	2027-02-28
Antenna, Passive Loop 30Hz - 1MHz	ELECTRO-METRICS	EM-6871	170014	2027-09-30
Antenna, Passive Loop 100KHz - 30MHz	ELECTRO-METRICS	EM-6872	170016	2027-09-30
Amplifier, 9KHz to 1GHz, 32dB	SONOMA INSTRUMENT	310	170647	2027-30-30
EMI TEST RECEIVER	Rohde & Schwarz	ESW44	169927	2027-02-28
Antenna, Broadband Hybrid, 3m & 10m	Sunol Sciences Corp.	JB3	80706	2027-08-31
Amplifier, 9KHz to 1GHz, 32dB	SONOMA INSTRUMENT	310N	202989	2027-04-30
PXA Signal Analyzer 2Hz to 44GHz	Keysight Technologies Inc	N9030B	231912	2027-01-31
Conducted Switch Box	UL	CSB	187984	2027-01-31
Spectrum Analyzer, PXA, 3Hz to 44GHz	Keysight Technologies Inc	N9030A	85214	2027-01-31
Conducted Switch Box	UL	CSB	245783	2027-01-31
Spectrum Analyzer, PXA, 3Hz to 44GHz	Keysight Technologies Inc	N9030A	85313	2027-01-31
Conducted Switch Box	UL	CSB	235779	2027-01-31
P-Series Power Meter	Keysight Technologies Inc	N1912A-CFG003	259286	2027-01-31
Power Sensor, P - series, 50MHz to 18GHz, Wideband	Keysight Technologies Inc	N1921A	90389	2027-01-31
P-Series Power Meter	Keysight Technologies Inc	N1911A	90731	2027-01-31
Power Sensor, P - series, 50MHz to 18GHz, Wideband	Keysight Technologies Inc	N1921A	257705	2027-01-31
10dB Fixed Attenuator, Up to 6GHz	Pasternack Enterprises	PE7162-10	236283	2026-08-31
10dB Fixed Attenuator, Up to 6GHz	Pasternack Enterprises	PE7162-10	236284	2026-08-31

AC LINE CONDUCTED				
Description	Manufacturer	Model	ID Num	Cal Due
EMI TEST RECEIVER	Rohde & Schwarz	ESC17	82297	2027-02-28
LISN	Fischer Custom Communications	FCC-LISN-50/250-25-2-01-480V	175765	2027-01-31
Transient Limiter	TE	TBFL1	207996	2026-12-30

UL AUTOMATION SOFTWARE			
Description	Manufacturer	Model	Version
Radiated Software	UL	UL EMC	Ver 9.5, Aug 15, 2025 Ver 9.5, Dec 15, 2025
Conducted Software	UL	Station Tool	V2026.6.0
AC Line Conducted Software	UL	UL EMC	Ver 9.5, Aug 25, 2025

*Testing is completed before equipment expiration date.

8. ANTENNA PORT TEST RESULTS

8.1. ON TIME AND DUTY CYCLE

LIMITS

None; for reporting purposes only.


TEST PROCEDURE

ANSI C63.10, Subclause 11.6.

ON TIME AND DUTY CYCLE RESULTS

Mode	ON Time T (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T Minimum VBW (kHz)
BDR (GFSK)	2.873	3.750	0.766	76.6	1.16	0.348
EDR (8PSK)	2.880	3.750	0.768	76.8	1.15	0.347
BTCSM2	0.042	0.415	0.101	10.1	9.95	23.810

Note: The duty cycle is identical for both 1TX and 2TX configurations.

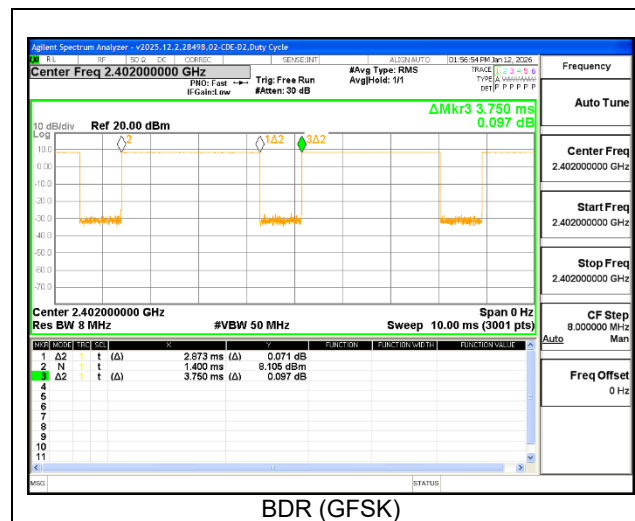

8.2. 20 dB AND 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

TEST PROCEDURE


Occupied Bandwidth (20 dB): ANSI C63.10 Section 6.9.2

Occupied Bandwidth (99%): ANSI C63.10 Section 6.9.3


RESULTS

Both SISO and MIMO TXBF modes were evaluated, and no significant differences were observed. Accordingly, only the SISO high-power results are presented.


Mode (SISO)	Frequency (MHz)	Channel	20 dB Bandwidth (MHz)		99% Bandwidth (MHz)	
			ANT 4	ANT 3	ANT 4	ANT 3
BDR (GFSK)	2402	Low	0.9477	0.9415	0.84812	0.85319
	2441	Mid	0.9388	0.9442	0.84056	0.85430
	2480	High	0.9361	0.9468	0.84514	0.84356
EDR (8PSK)	2402	Low	1.3260	1.2910	1.18740	1.17870
	2441	Mid	1.3000	1.3200	1.18890	1.18810
	2480	High	1.2810	1.3110	1.18110	1.18530
BTCSM2	2402	Low	0.1198	0.1190	0.24081	0.22967
	2441	Mid	0.1202	0.1204	0.24240	0.22847
	2480	High	0.1201	0.1201	0.24096	0.22985

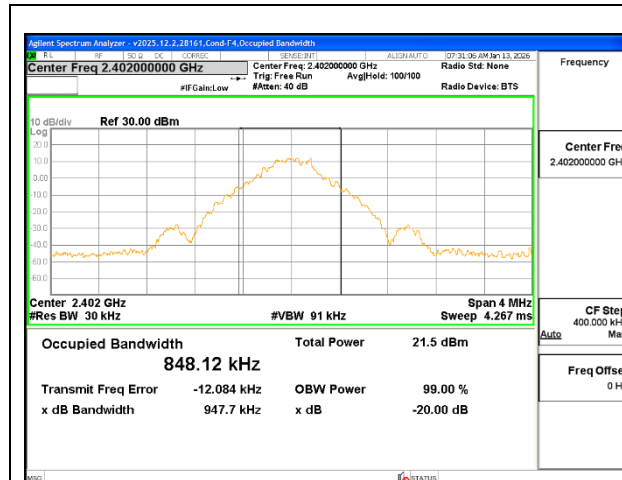WORST MAXIMUM PLOTS


20 dB BW – GFSK 2402 MHz – ANT 4

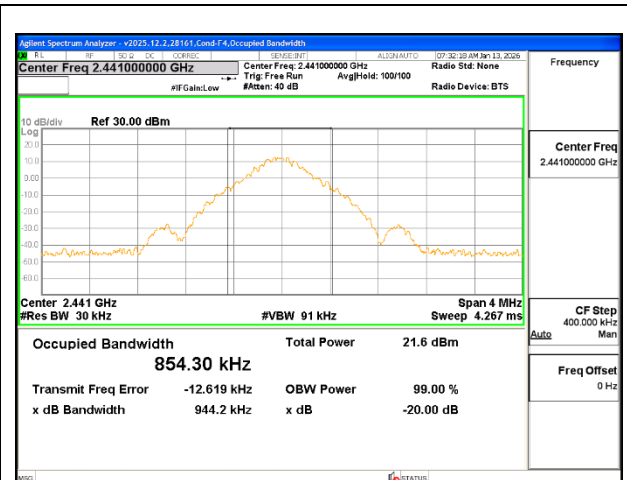


99% BW – GFSK 2441 MHz – ANT 3

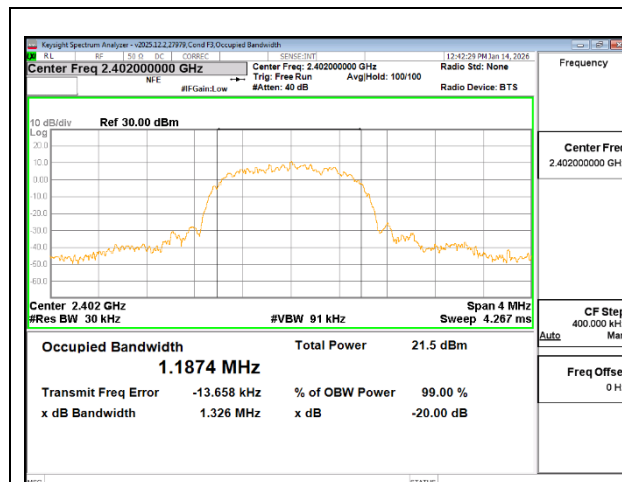


20 dB BW – 8PSK 2402 MHz – ANT 4

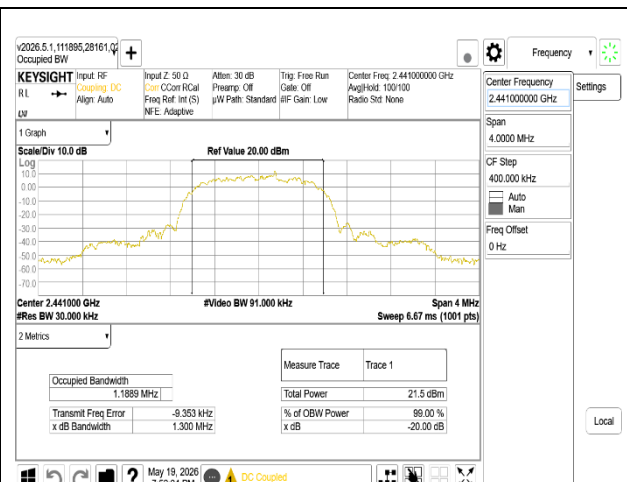

99% BW – 8PSK 2441 MHz – ANT 4

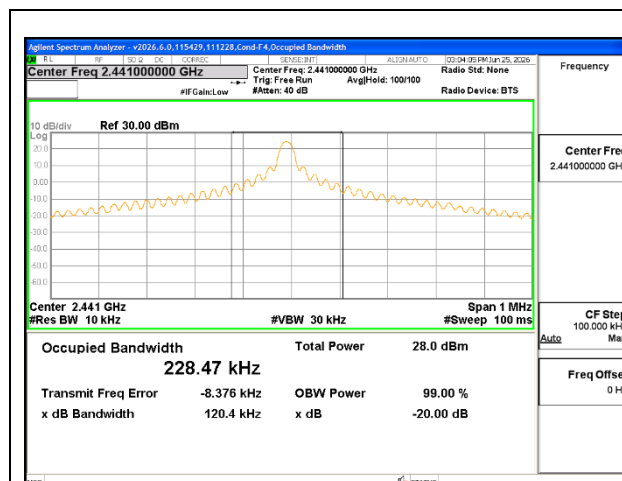

20 dB BW – BTCSM2 2441 MHz – ANT 3

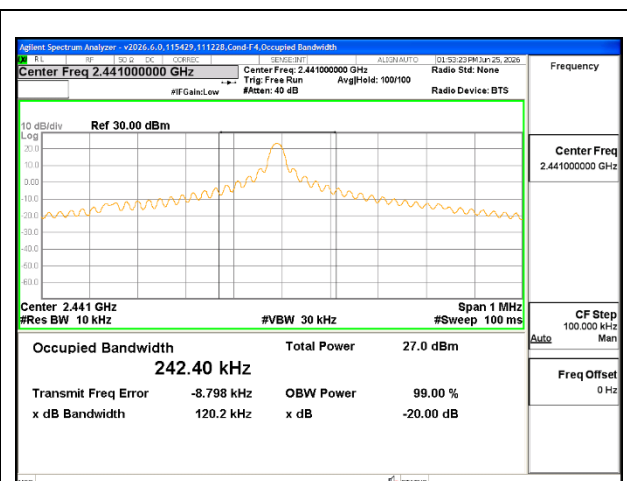

99% BW – BTCSM2 2441 MHz – ANT 4

8.3. HOPPING FREQUENCY SEPARATION

LIMITS

FCC §15.247 (a) (1)

RSS-247 (6.2.1) (b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE


ANSI C63.10 Section 7.8.2

RESULTS

Mode	Hopping Frequency Separation (MHz)		Limit (MHz)		Power Limit
	ANT 4	ANT 3	Min 25 kHz or 20 dB BW	25 kHz or 2/3 of 20 dB BW	
GFSK	1.00	1.00	0.948	0.632	1W
8PSK	1.00	1.00	1.337	0.891	125mW
BTCSM2	1.00	1.00	0.126	0.084	1W


8.3.1. BDR (GFSK) – HIGH POWER

HOPPING FREQUENCY SEPARATION

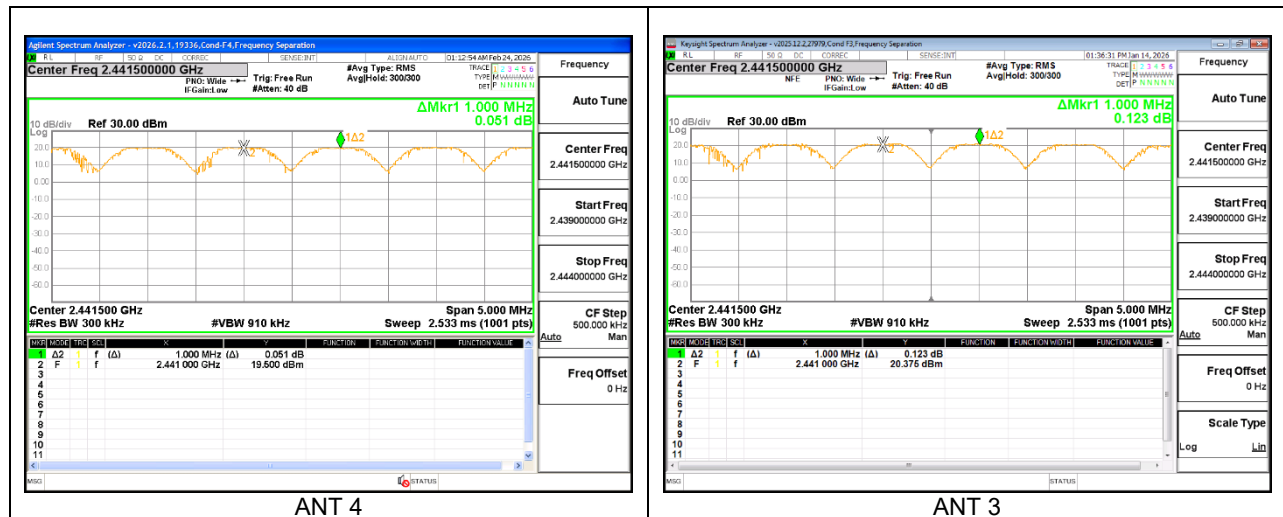


8.3.1. EDR (8PSK) – HIGH POWER

HOPPING FREQUENCY SEPARATION

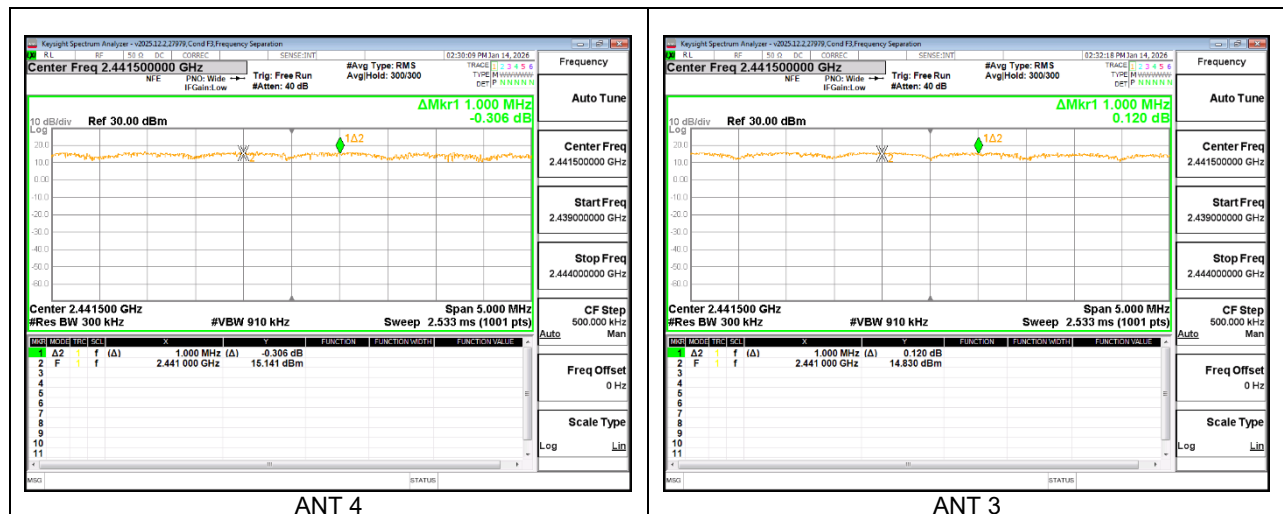

8.3.2. BTCSM2 – HIGH POWER

HOPPING FREQUENCY SEPARATION

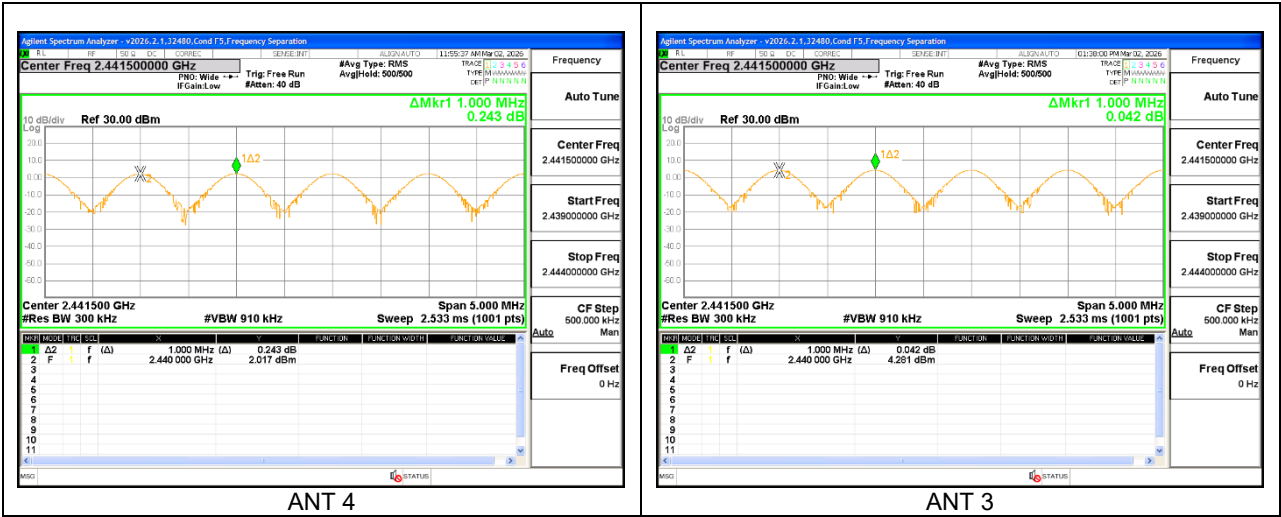

8.4. NUMBER OF HOPPING CHANNELS

LIMITS

FCC §15.247 (a) (1) (iii)

RSS-247 (6.2.3.1) (b)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.

TEST PROCEDURE

ANSI C63.10 Section 7.8.3


RESULTS


Normal Mode: 79 Channels Observed.

Note: Only the High-Power BDR (GFSK) mode results are reported, as EDR (QPSK/8PSK) utilizes the same channel plan.

8.4.1. BDR (GFSK) – HIGH POWER


ANT 4

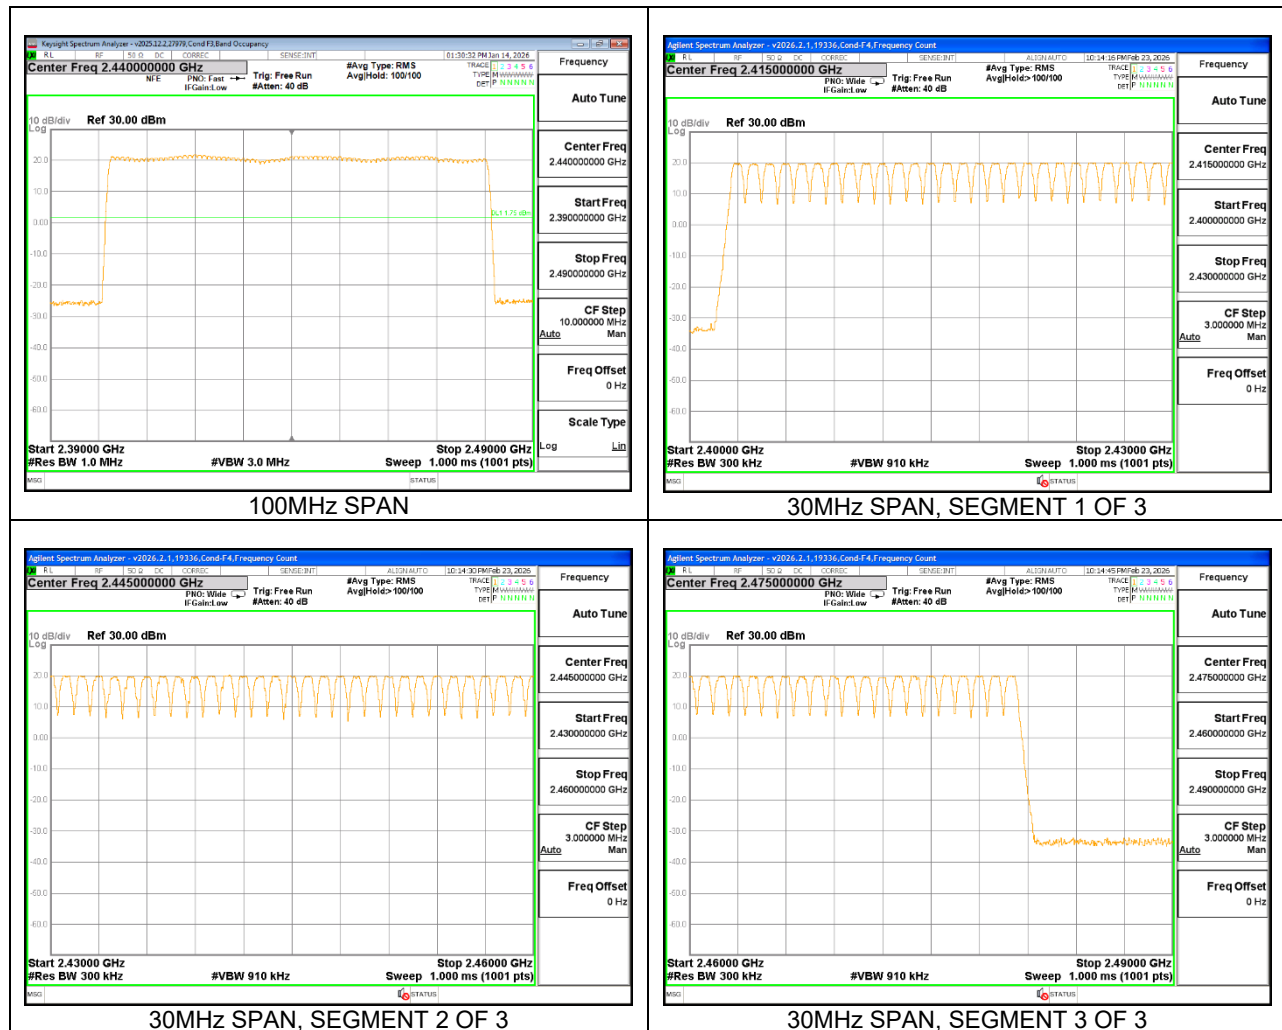


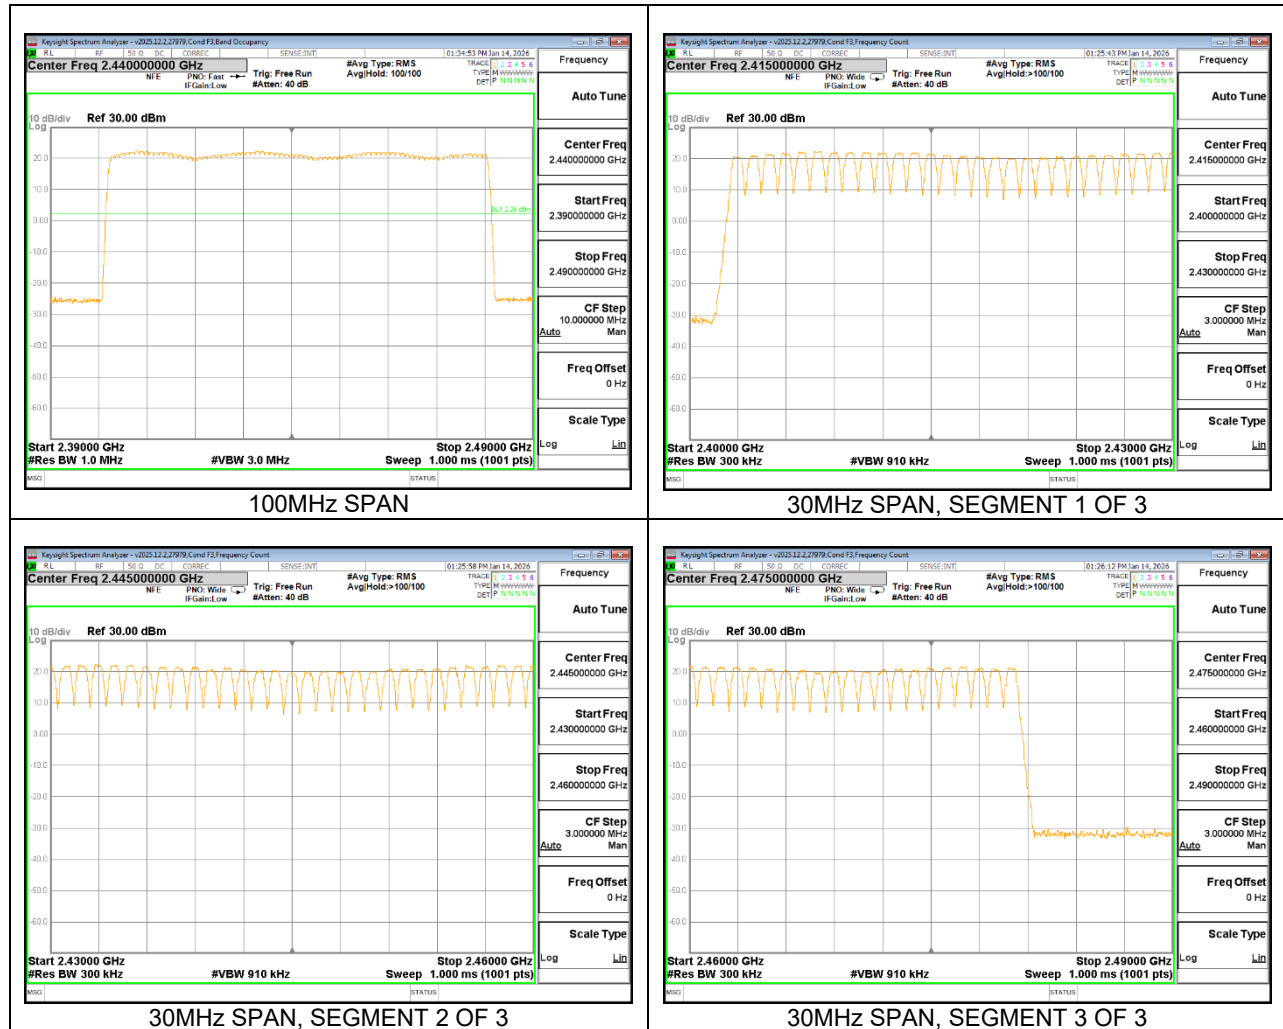ANT 3

8.4.1. BTCSM2 – HIGH POWER

ANT 4

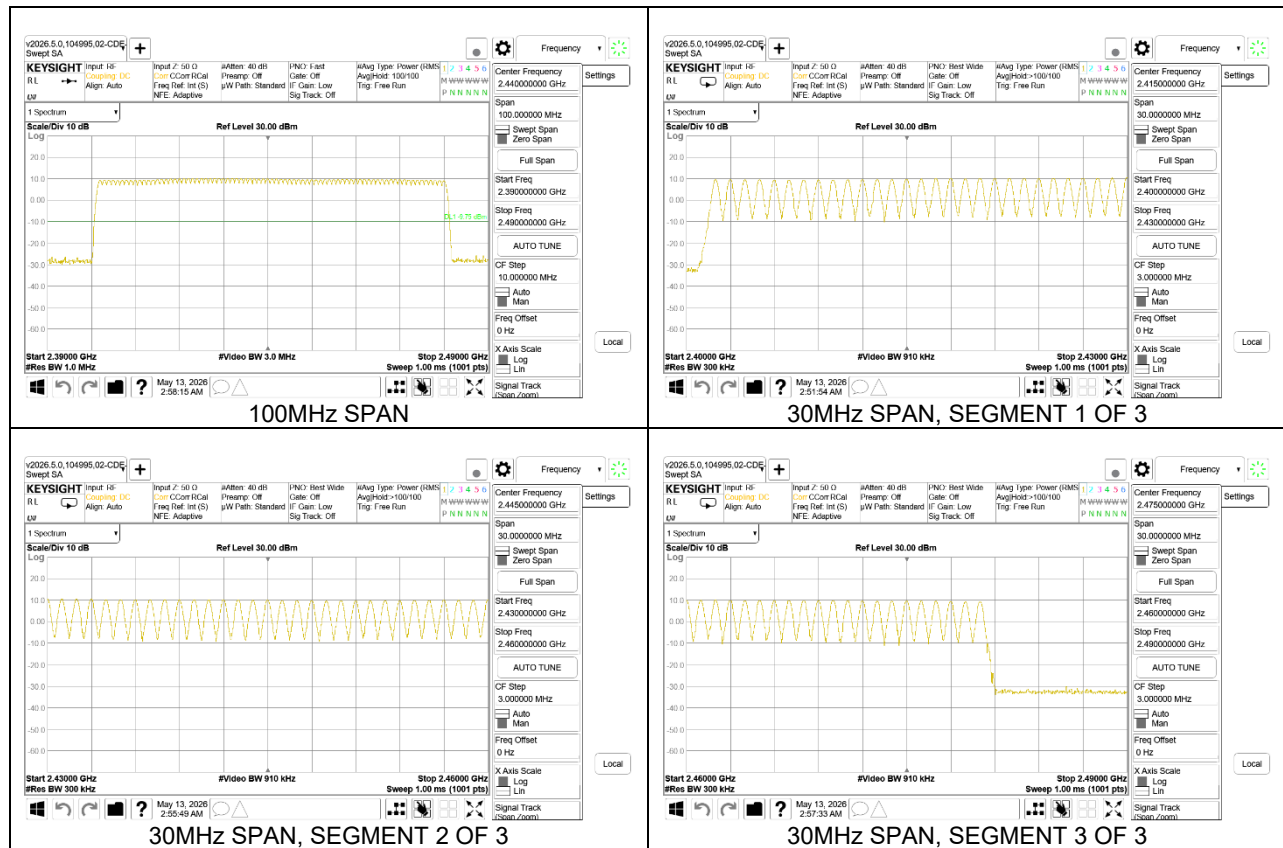

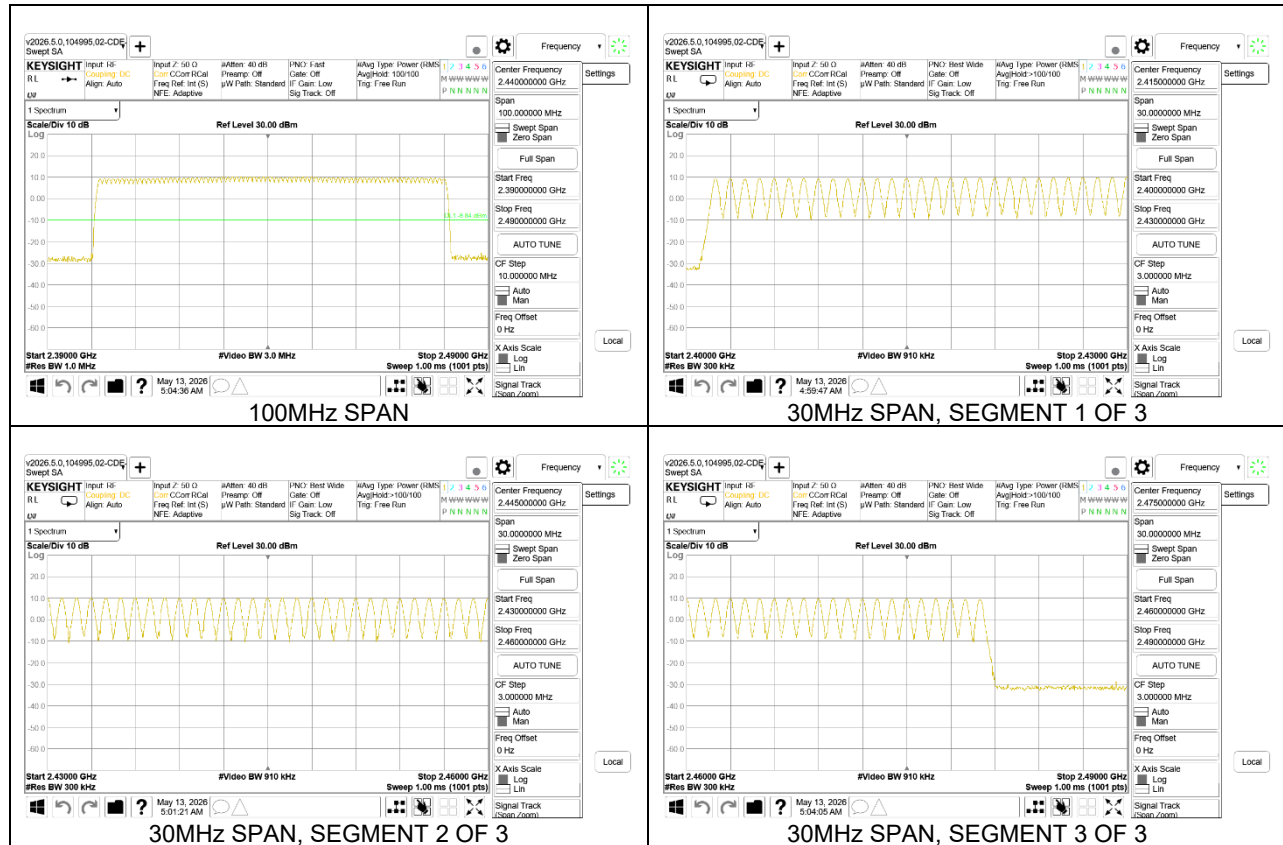ANT 3

8.5. AVERAGE TIME OF OCCUPANCY

LIMITS

FCC §15.247 (a) (1) (iii)

RSS-247 (6.2.3.1) (b)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST PROCEDURE

ANSI C63.10 Section 7.8.4

RESULTS

Only the High-Power BDR (GFSK) mode result is reported, as the EDR (QPSK/8PSK) modes utilize identical timing.

8.5.1. BDR (GFSK) – HIGH POWER**ANT 4**


DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK Normal Mode					
DH1	0.370	32	0.118	0.400	-0.282
DH3	1.628	15	0.244	0.400	-0.156
DH5	2.876	11	0.316	0.400	-0.084
DH Packet	Pulse Width (msec)	Number of Pulses in 0.8 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK AFH Mode					
DH1	0.370	8	0.030	0.400	-0.370
DH3	1.628	3.75	0.061	0.400	-0.339
DH5	2.876	2.75	0.079	0.400	-0.321






PULSE WIDTH – DH1



PULSE WIDTH – DH3

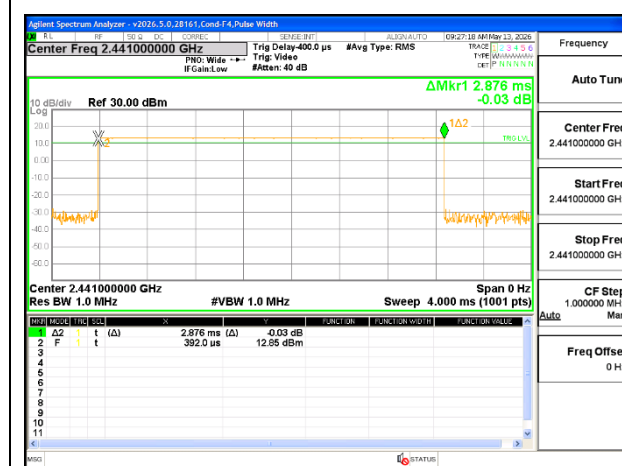

PULSE WIDTH – DH5

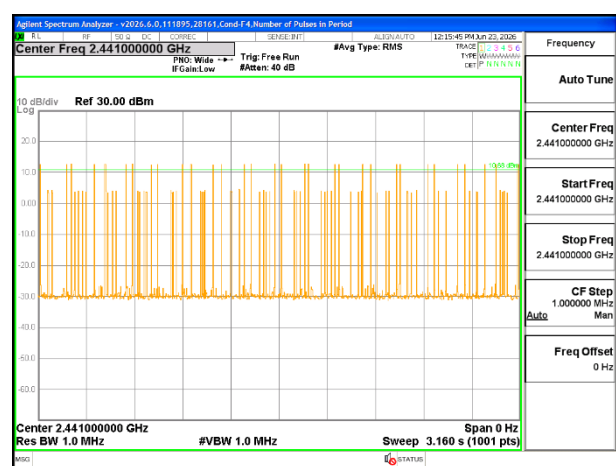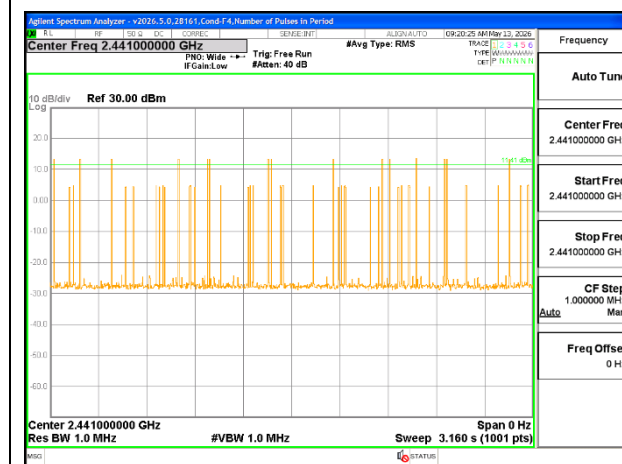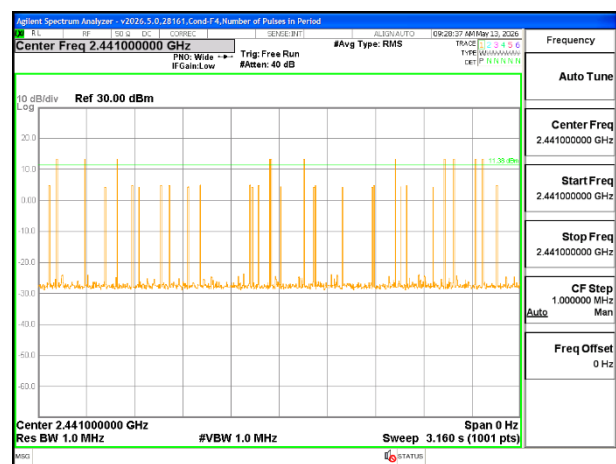NUMBER OF PULSES IN 3.16 SECOND
OBSERVATION PERIOD – DH1NUMBER OF PULSES IN 3.16 SECOND
OBSERVATION PERIOD – DH3NUMBER OF PULSES IN 3.16 SECOND
OBSERVATION PERIOD – DH5

ANT 3


DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK Normal Mode					
DH1	0.370	32	0.118	0.400	-0.282
DH3	1.628	16	0.260	0.400	-0.140
DH5	2.876	11	0.316	0.400	-0.084
DH Packet	Pulse Width (msec)	Number of Pulses in 0.8 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK AFH Mode					
DH1	0.370	8	0.030	0.400	-0.370
DH3	1.628	4	0.065	0.400	-0.335
DH5	2.876	2.75	0.079	0.400	-0.321



8.5.2. BTCSM2 – HIGH POWER

ANT 4

DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
BTCSM2 Normal Mode					
DH1	0.045	96	0.043	0.400	-0.357
DH Packet	Pulse Width (msec)	Number of Pulses in 0.8 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
BTCSM2 AFH Mode					
DH1	0.045	24	0.011	0.400	-0.389

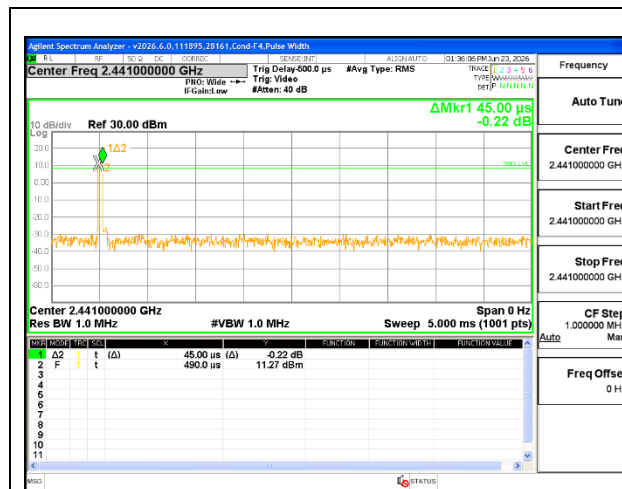


PULSE WIDTH


NUMBER OF PULSES IN 3.16 SECOND
OBSERVATION PERIOD

ANT 3

DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
BTCSM2 Normal Mode					
DH1	0.045	97	0.044	0.400	-0.356
DH Packet	Pulse Width (msec)	Number of Pulses in 0.8 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
BTCSM2 AFH Mode					
DH1	0.045	24.25	0.011	0.400	-0.389

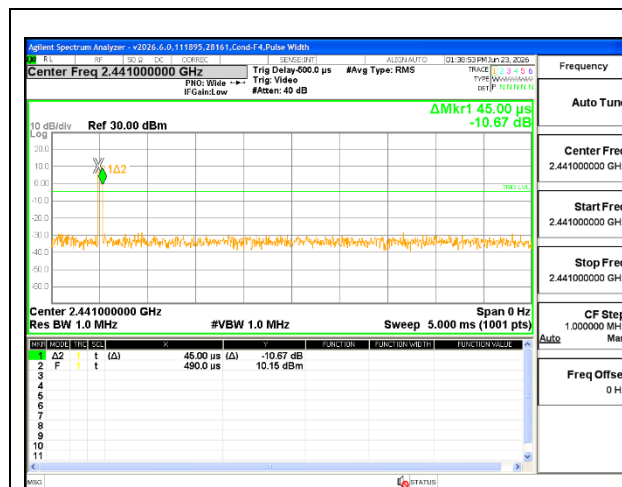

PULSE WIDTH

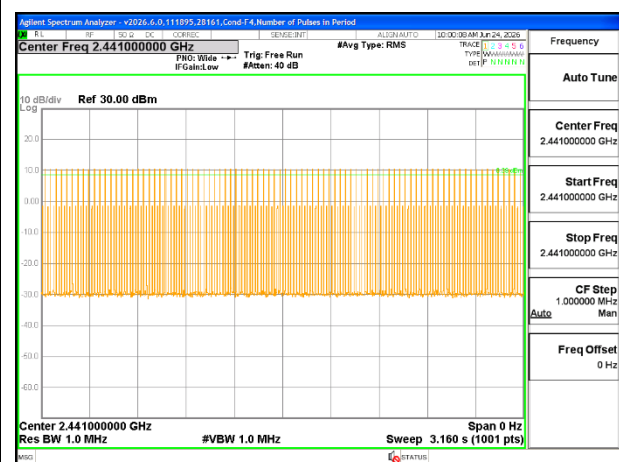NUMBER OF PULSES IN 3.16 SECOND
OBSERVATION PERIOD

8.6. OUTPUT POWER

LIMITS

§15.247

- (a) (1) The maximum antenna gain is less than 6 dBi, therefore the limit is 30 dBm. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.
- (b) (1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts

RSS-247

(6.2.3.1)

a. FHS operating in the band 2400-2483.5 MHz may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided that the systems operate with an output power no greater than 0.125 W.

(6.2.3.2)

The following transmitter output power and e.i.r.p. requirements shall apply:

- a. if the hopset uses 75 or more hopping channels, the maximum peak conducted output power shall not exceed 1.0 W.
- b. if the hopset uses less than 75 hopping channels the maximum peak conducted output power shall not exceed 0.125 W.
- c. the e.i.r.p. shall not exceed 4 W, except as provided in sections 6.5 a) and b).

TEST PROCEDURE

ANSI C63.10 Section 7.8.5

NOTE—A peak responding power meter may be used, where the power meter and sensor system video bandwidth is greater than the occupied bandwidth of the unlicensed wireless device, rather than a spectrum analyzer.

DIRECTIONAL ANTENNA GAIN

For 1 TX:

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

For 2 TX:

Tx chains are correlated for power due to the device supporting beamforming.

The directional gains are as follows:

Frequency Range (GHz)	Antenna Type	Antenna Peak Gain			
		ANT 4 (dBi)	ANT 3 (dBi)	Uncorrelated Chains (dBi)	Correlated Chains (dBi)
2.4	IFA	0.50	-1.00	-1.80	0.50

RESULTS

8.6.1. SISO

2.4G (SISO)	
ANT 4 (dBi)	0.50
ANT 3 (dBi)	-1.00

Mode (SISO)	Power Config.	Frequency (MHz)	Channel	Power Limit (dBm)		Peak Power (dBm)	
				ANT 4	ANT 3	ANT 4	ANT 3
BDR (GFSK)	High	2402	Low	21	21	20.01	19.92
		2441	Mid			19.99	19.95
		2480	High			19.98	20.11
	Low	2402	Low			8.85	7.57
		2441	Mid			8.80	7.63
		2480	High			8.79	7.59
EDR (DQPSK)	High	2402	Low			18.97	19.13
		2441	Mid			19.09	19.15
		2480	High			19.02	19.05
	Low	2402	Low			8.31	7.02
		2441	Mid			8.40	7.10
		2480	High			8.35	7.04
EDR (8PSK)	High	2402	Low			19.23	19.31
		2441	Mid			19.29	19.44
		2480	High			19.45	19.29
	Low	2402	Low			8.71	7.28
		2441	Mid			8.77	7.44
		2480	High			8.64	7.54
BTCM2	High	2402	Low			19.98	20.12
		2441	Mid			20.12	20.13
		2480	High			20.00	20.14
	Low	2402	Low			8.93	7.62
		2441	Mid			8.94	7.66
		2480	High			8.92	7.66

8.6.2. MIMO TXBF

2.4G (MIMO TXBF)	
Un-Correlated Gain (dBi)	-1.80
Correlated Gain (dBi)	0.50

Mode (TXBF MIMO)	Power Config.	Frequency (MHz)	Channel	Power Limit (dBm)	Peak Power (dBm)		Total MIMO Peak Power (dBm)
					ANT 4	ANT 3	
BDR (GFSK)	High	2402	Low	21	17.01	17.02	20.03
		2441	Mid		17.06	17.08	20.08
		2480	High		16.95	17.14	20.06
	Low	2402	Low		8.85	7.70	11.32
		2441	Mid		8.78	7.63	11.25
		2480	High		8.85	7.57	11.27
EDR (DQPSK)	High	2402	Low		16.35	16.29	19.33
		2441	Mid		16.39	16.23	19.32
		2480	High		16.39	16.25	19.33
	Low	2402	Low		8.18	7.05	10.66
		2441	Mid		8.26	7.20	10.77
		2480	High		8.15	7.24	10.73
EDR (8PSK)	High	2402	Low		16.20	16.17	19.20
		2441	Mid		16.11	16.16	19.15
		2480	High		16.18	16.31	19.26
	Low	2402	Low		8.45	7.23	10.89
		2441	Mid		8.61	7.39	11.05
		2480	High		8.44	7.39	10.96

8.7. AVERAGE OUTPUT POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband RF power meter.

The power output was measured on the EUT antenna port using SMA cable connected to a power meter via wideband average power sensor. Gated average output power was read directly from power meter.

RESULTS

8.7.1. SISO

Mode (SISO)	Power Config.	Frequency (MHz)	Channel	Average Power (Gated) (dBm)	
				ANT 4	ANT 3
BDR (GFSK)	High	2402	Low	19.87	19.79
		2441	Mid	19.81	19.79
		2480	High	19.85	19.94
	Low	2402	Low	8.69	7.48
		2441	Mid	8.72	7.43
		2480	High	8.70	7.42
EDR (DQPSK)	High	2402	Low	16.45	16.49
		2441	Mid	16.42	16.43
		2480	High	16.48	16.39
	Low	2402	Low	5.71	4.39
		2441	Mid	5.73	4.42
		2480	High	5.68	4.40
EDR (8PSK)	High	2402	Low	16.48	16.45
		2441	Mid	16.47	16.42
		2480	High	16.42	16.48
	Low	2402	Low	5.71	4.39
		2441	Mid	5.73	4.37
		2480	High	5.68	4.44
BTCSM2	High	2402	Low	19.80	19.92
		2441	Mid	19.91	19.94
		2480	High	19.86	19.97
	Low	2402	Low	8.67	7.41
		2441	Mid	8.74	7.42
		2480	High	8.75	7.47

8.7.2. MIMO TXBF

Mode (TXBF MIMO)	Power Config.	Frequency (MHz)	Channel	Average Power (Gated) (dBm)		Total MIMO Average Power (Gated) (dBm)
				ANT 4	ANT 3	
BDR (GFSK)	High	2402	Low	16.89	16.91	19.91
		2441	Mid	16.98	16.96	19.98
		2480	High	16.82	16.96	19.90
	Low	2402	Low	8.69	7.47	11.13
		2441	Mid	8.67	7.43	11.10
		2480	High	8.73	7.42	11.13
EDR (DQPSK)	High	2402	Low	13.41	13.45	16.44
		2441	Mid	13.44	13.44	16.45
		2480	High	13.45	13.34	16.41
	Low	2402	Low	5.70	4.48	8.14
		2441	Mid	5.71	4.45	8.14
		2480	High	5.73	4.44	8.14
EDR (8PSK)	High	2402	Low	13.43	13.46	16.46
		2441	Mid	13.40	13.45	16.44
		2480	High	13.41	13.34	16.39
	Low	2402	Low	5.69	4.48	8.14
		2441	Mid	5.68	4.46	8.12
		2480	High	5.73	4.43	8.14

8.8. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

RSS-247 6.6

Limit = -20 dBc

TEST PROCEDURE

Conducted Spurious Emissions: ANSI C63.10 Section 7.8.7

Conducted Band-Edge: ANSI C63.10 Section 6.10.4

RESULTS


8.8.1. BDR (GFSK) – HIGH POWER – SISO

ANT 4 (NON-HOPPING)




ANT 4 (HOPPING)

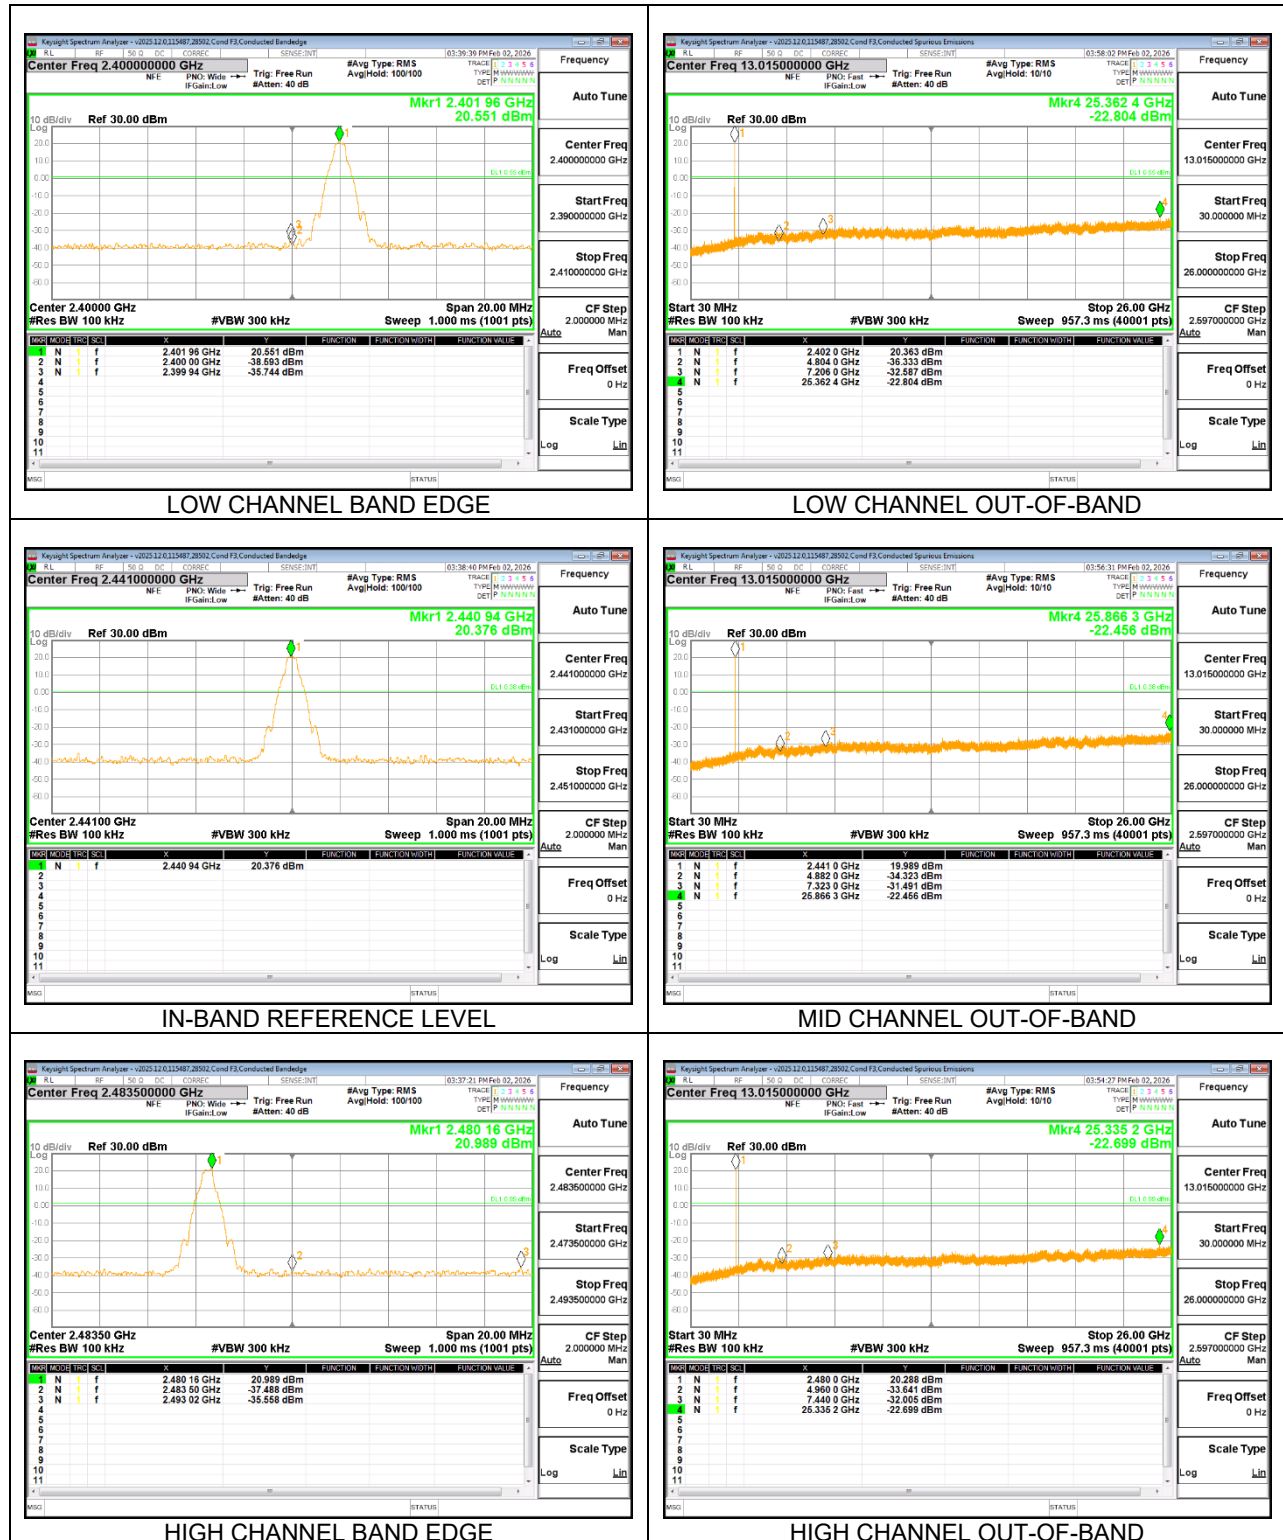


ANT 3 (NON-HOPPING)


ANT 3 (HOPPING)

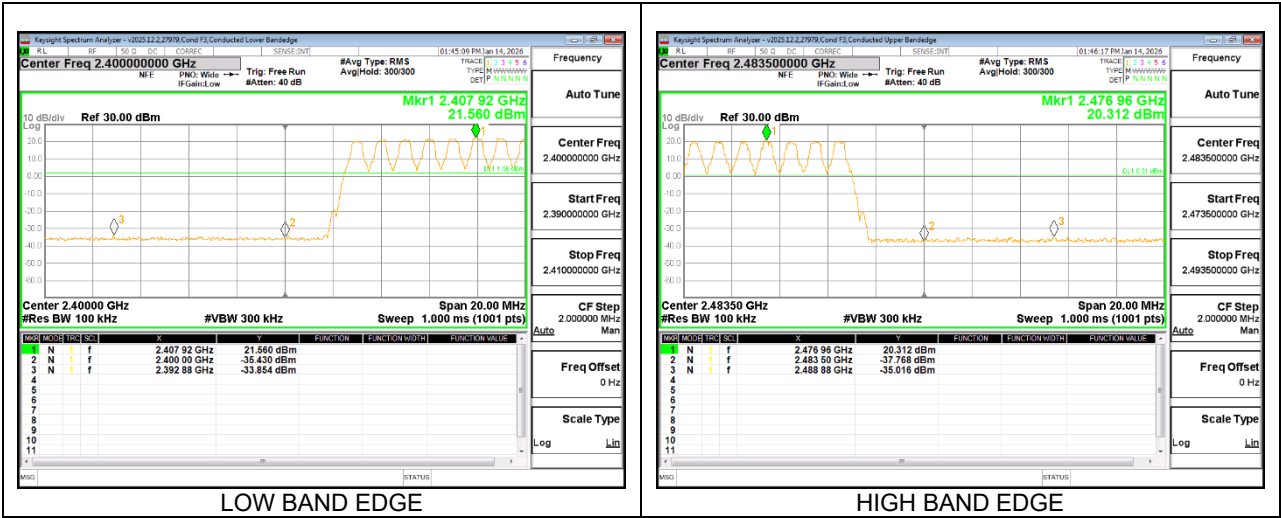


8.8.2. BDR (GFSK) – HIGH POWER – MIMO TXBF

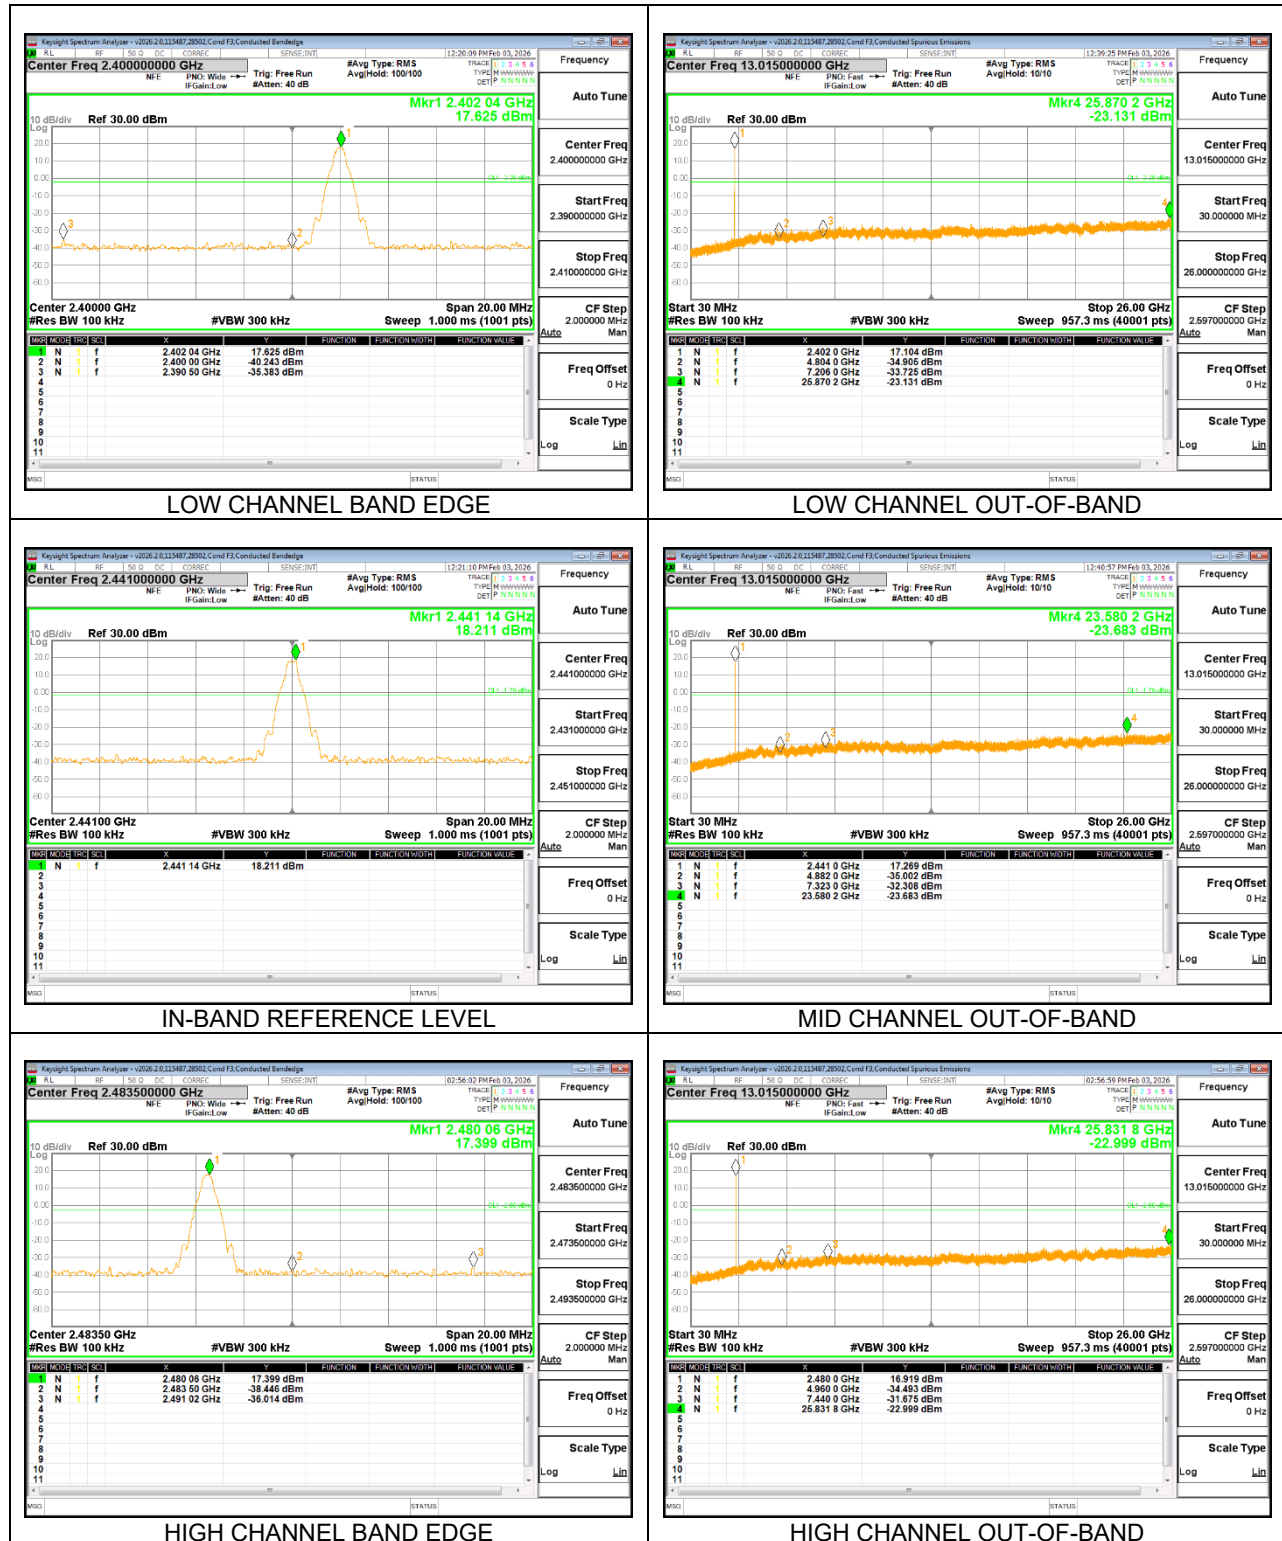
ANT 4 (NON-HOPPING)

ANT 4 (HOPPING)

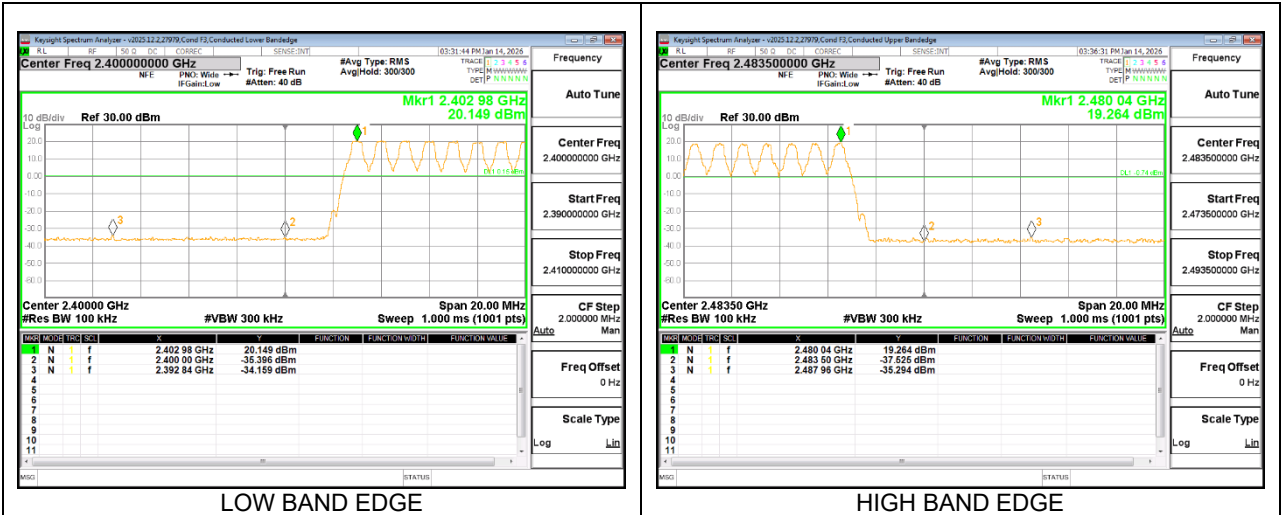


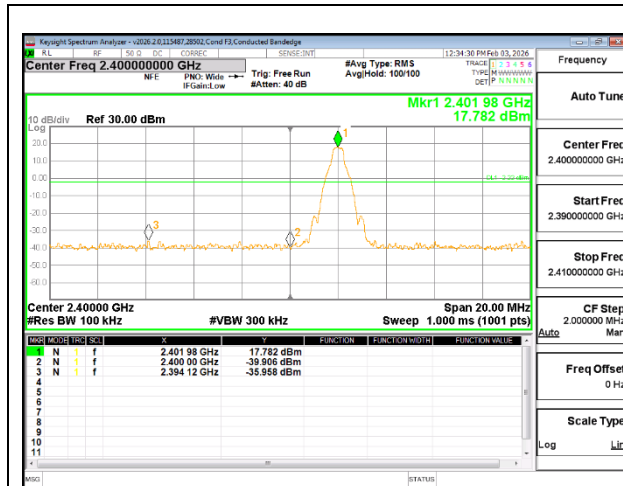ANT 3 (NON-HOPPING)


LOW CHANNEL BAND EDGE

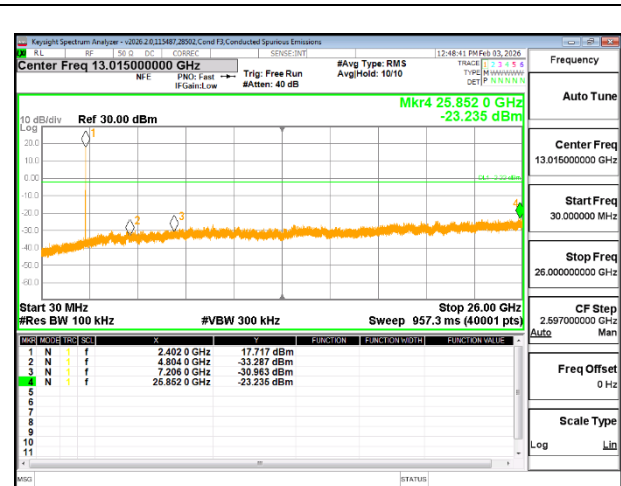


LOW CHANNEL OUT-OF-BAND

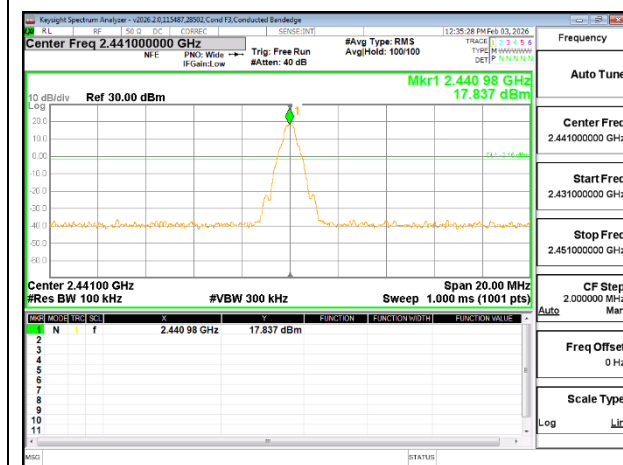


IN-BAND REFERENCE LEVEL

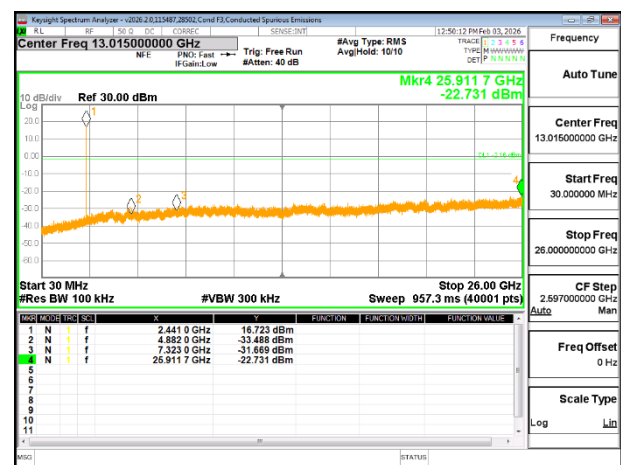

MID CHANNEL OUT-OF-BAND

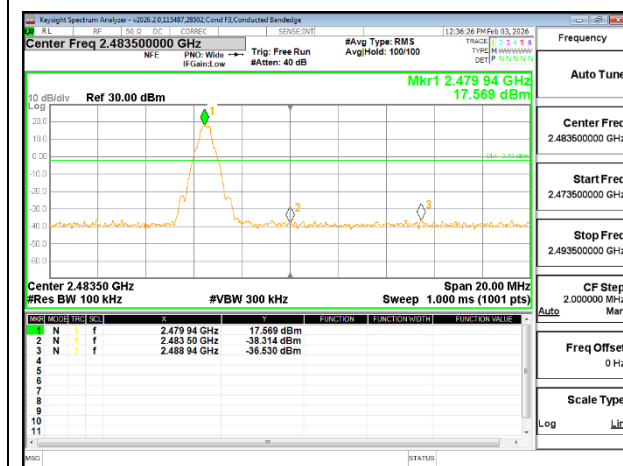

HIGH CHANNEL BAND EDGE

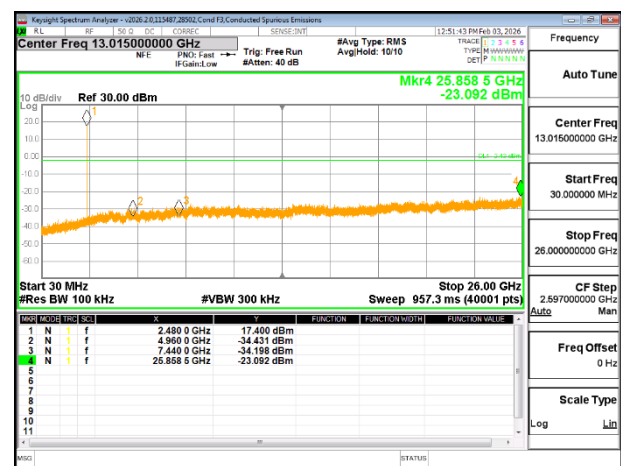

HIGH CHANNEL OUT-OF-BAND