


10.1. AC POWER LINE WITH AC/DC ADAPTER

LINE 1 RESULTS

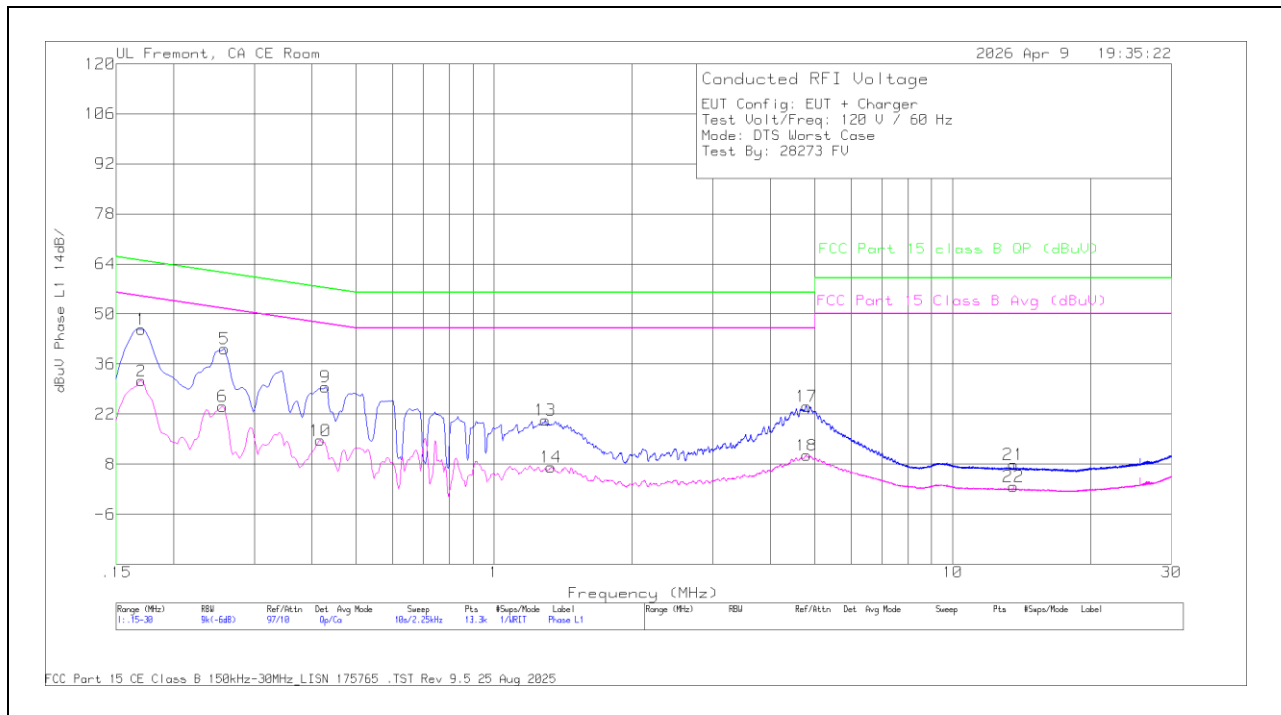


Range 1: Phase L1 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Cbl (dB)	LISN (dB)	10dB Atten (dB)	Corrected Reading dBuV	FCC Part 15 Class B Avg (dBuV)	Margin (dB)	FCC Part 15 class B QP (dBuV)	Margin (dB)
2	.1703	21.15	Ca	0	.1	10	31.25	54.95	-23.7	-	-
6	.2558	14.09	Ca	0	0	10	24.09	51.57	-27.48	-	-
10	.4178	4.6	Ca	0	0	10	14.6	47.49	-32.89	-	-
14	1.3324	-2.98	Ca	.1	0	10	7.12	46	-38.88	-	-
18	4.803	.31	Ca	.1	0	10	10.41	46	-35.59	-	-
22	13.56	-8.55	Ca	.2	.1	10	1.75	50	-48.25	-	-
1	.1703	35.65	Qp	0	.1	10	45.75	-	-	64.95	-19.2
5	.258	30.21	Qp	0	0	10	40.21	-	-	61.5	-21.29
9	.429	19.52	Qp	0	0	10	29.52	-	-	57.27	-27.75
13	1.2953	10.19	Qp	.1	0	10	20.29	-	-	56	-35.71
17	4.803	14.02	Qp	.1	0	10	24.12	-	-	56	-31.88
21	13.56	-2.49	Qp	.2	.1	10	7.81	-	-	60	-52.19

Qp - Quasi-Peak detector

Ca - CISPR average detection

LINE 2 RESULTS

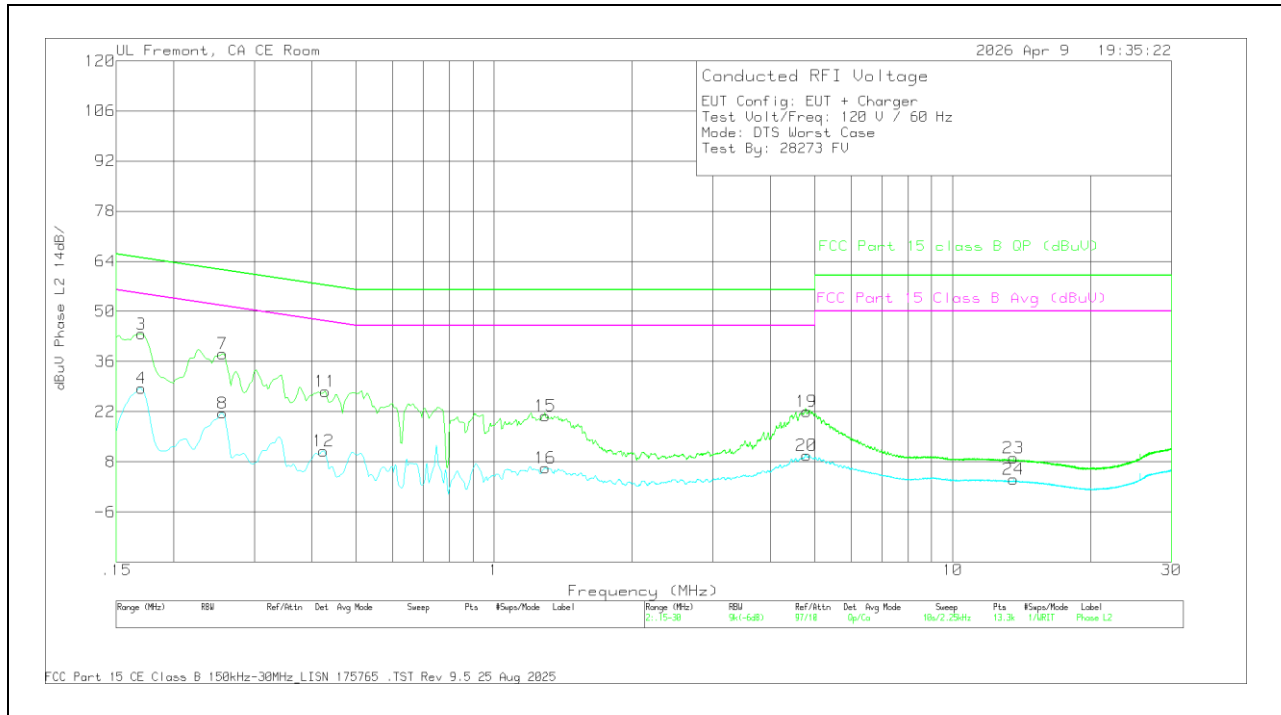


Range 2: Phase L2 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Cbl (dB)	LISN (dB)	10dB Atten (dB)	Corrected Reading dBuV	FCC Part 15 Class B Avg (dBuV)	Margin (dB)	FCC Part 15 class B QP (dBuV)	Margin (dB)
4	.1703	18.58	Ca	0	0	10	28.58	54.95	-26.37	-	-
8	.2558	11.6	Ca	0	0	10	21.6	51.57	-29.97	-	-
12	.4245	.99	Ca	0	0	10	10.99	47.36	-36.37	-	-
16	1.2953	-3.82	Ca	.1	0	10	6.28	46	-39.72	-	-
20	4.7985	-.27	Ca	.1	0	10	9.83	46	-36.17	-	-
24	13.56	-7.23	Ca	.2	.1	10	3.07	50	-46.93	-	-
3	.1703	33.69	Qp	0	0	10	43.69	-	-	64.95	-21.26
7	.2558	28.17	Qp	0	0	10	38.17	-	-	61.57	-23.4
11	.429	17.72	Qp	0	0	10	27.72	-	-	57.27	-29.55
15	1.2953	10.71	Qp	.1	0	10	20.81	-	-	56	-35.19
19	4.7985	11.93	Qp	.1	0	10	22.03	-	-	56	-33.97
23	13.56	-1.21	Qp	.2	.1	10	9.09	-	-	60	-50.91

Qp - Quasi-Peak detector

Ca - CISPR average detection

10.2. AC POWER LINE WITH LAPTOP

LINE 1 RESULTS

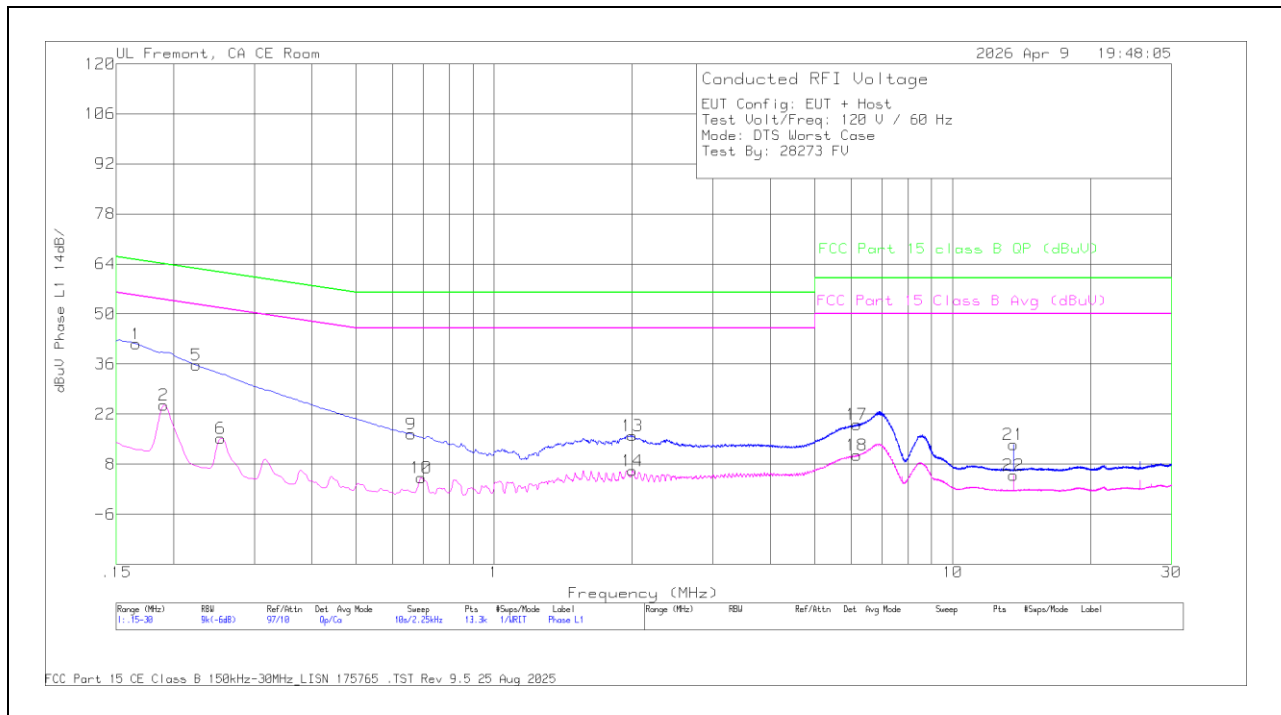


Range 1: Phase L1 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Cbl (dB)	LISN (dB)	10dB Atten (dB)	Corrected Reading dBuV	FCC Part 15 Class B Avg (dBuV)	Margin (dB)	FCC Part 15 class B QP (dBuV)	Margin (dB)
2	.1905	14.34	Ca	0	.1	10	24.44	54.01	-29.57	-	-
6	.2535	5.18	Ca	0	0	10	15.18	51.64	-36.46	-	-
10	.6945	-5.86	Ca	.1	0	10	4.24	46	-41.76	-	-
14	2.004	-3.92	Ca	.1	0	10	6.18	46	-39.82	-	-
18	6.1823	.25	Ca	.2	0	10	10.45	50	-39.55	-	-
22	13.56	-5.4	Ca	.2	.1	10	4.9	50	-45.1	-	-
1	.1658	31.49	Qp	0	.1	10	41.59	-	-	65.17	-23.58
5	.2243	25.7	Qp	0	0	10	35.7	-	-	62.66	-26.96
9	.6608	6.27	Qp	.1	0	10	16.37	-	-	56	-39.63
13	2.0018	5.89	Qp	.1	0	10	15.99	-	-	56	-40.01
17	6.1755	8.89	Qp	.2	0	10	19.09	-	-	60	-40.91
21	13.56	3.22	Qp	.2	.1	10	13.52	-	-	60	-46.48

Qp - Quasi-Peak detector

Ca - CISPR average detection

LINE 2 RESULTS

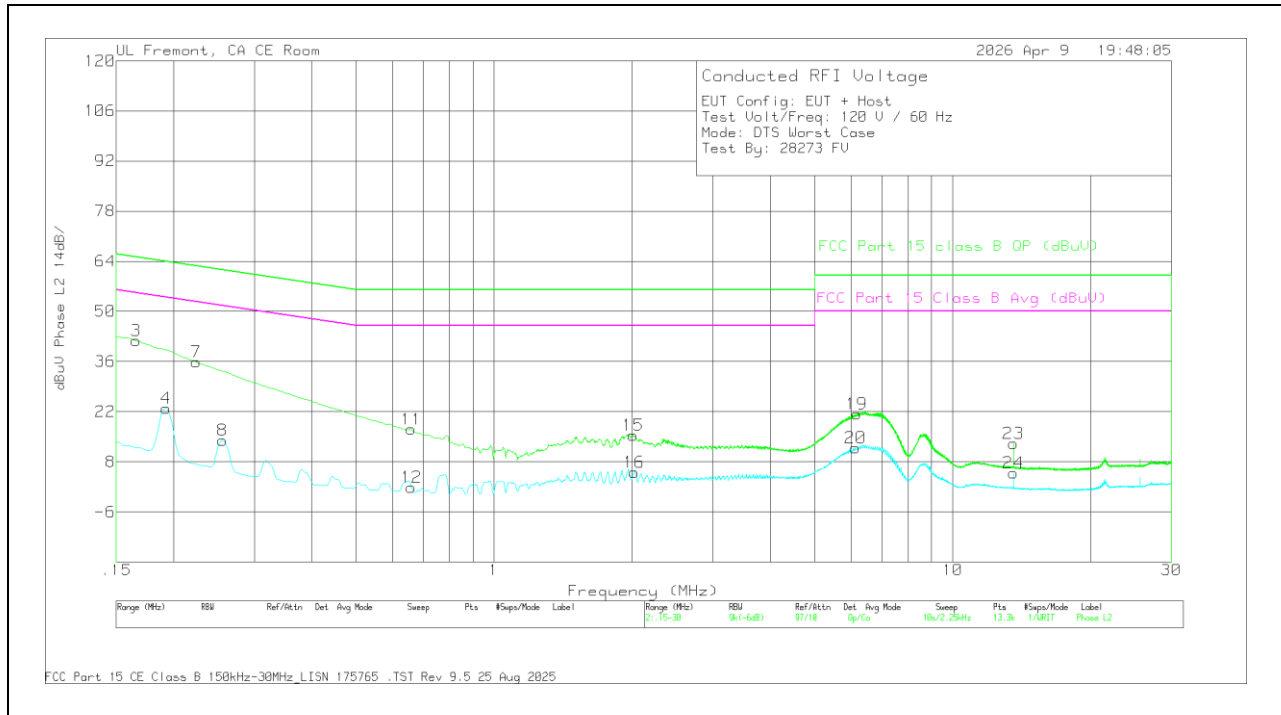

Range 2: Phase L2 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Cbl (dB)	LISN (dB)	10dB Atten (dB)	Corrected Reading dBuV	FCC Part 15 Class B Avg (dBuV)	Margin (dB)	FCC Part 15 class B QP (dBuV)	Margin (dB)
4	.1928	12.91	Ca	0	0	10	22.91	53.92	-31.01	-	-
8	.2558	4.04	Ca	0	0	10	14.04	51.57	-37.53	-	-
12	.6608	-9.27	Ca	.1	0	10	.83	46	-45.17	-	-
16	2.0198	-5.12	Ca	.1	0	10	4.98	46	-41.02	-	-
20	6.1395	1.62	Ca	.2	0	10	11.82	50	-38.18	-	-
24	13.56	-5.44	Ca	.2	.1	10	4.86	50	-45.14	-	-
3	.1658	31.77	Qp	0	.1	10	41.87	-	-	65.17	-23.3
7	.2243	25.86	Qp	0	0	10	35.86	-	-	62.66	-26.8
11	.6608	6.96	Qp	.1	0	10	17.06	-	-	56	-38.94
15	2.0085	5.33	Qp	.1	0	10	15.43	-	-	56	-40.57
19	6.1778	11.18	Qp	.2	0	10	21.38	-	-	60	-38.62
23	13.56	2.79	Qp	.2	.1	10	13.09	-	-	60	-46.91

Qp - Quasi-Peak detector

Ca - CISPR average detection

11. SETUP PHOTOS

Please refer to 15982167-EP1 for setup photos.