

RADIATED TEST REPORT

Report Number: 15982156-E13V2 & E15V2

Applicant : APPLE INC.
1 APPLE PARK WAY
CUPERTINO, CA 95014, U.S.A.

Model : A3713, A3714, A3715

Brand : APPLE

FCC ID : BCG-E9192A, BCG-E9193A, BCG-E9194A

IC : 579C-E9192A, 570C-E9193A, 579C-E9194A

EUT Description : SMARTPHONE

Test Standard(s) : FCC 47 CFR PART 15 SUBPART E
ISED RSS-248 ISSUE 3
ISED RSS-GEN ISSUE 5 + A1 + A2

Date Of Issue:
2026-07-29

Prepared by:
UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538 U.S.A.
TEL: (510) 319-4000
FAX: (510) 661-0888



REPORT REVISION HISTORY

Rev.	Issue Date	Revisions	Revised By
V1	2026-07-18	Initial Review	Sahdev Badyal
V2	2026-07-29	TCB Comments Addressed	Sahdev Badyal

TABLE OF CONTENTS

1. RADIATED TEST RESULTS	4
1.1. TRANSMITTER OUTSIDE 5.925 - 7.125 GHz, 1- 18GHz (Dual Client)	6
1.1.1. 802.11be SISO SU MODE IN UNII-5 BAND – BANDEDGE	6
1.1.2. 802.11be SISO PARTIAL RU MODE IN UNII-5 BAND – BANDEDGE	7
1.1.3. 802.11be MIMO SU MODE IN UNII-5 BAND - BANDEDGE	8
1.1.4. 802.11be MIMO PARTIAL RU MODE IN UNII-5 BAND - BANDEDGE	9
1.1.5. 802.11be MIMO MODE IN UNII-5 BAND – SPURIOUS EMISSIONS	11
1.1.6. 802.11be MIMO MODE IN UNII-6 BAND – SPURIOUS EMISSIONS	18
1.1.7. 802.11be MIMO MODE IN UNII-7 BAND – SPURIOUS EMISSIONS	25
1.1.8. 802.11a SISO MODE IN UNII-8 BAND – BANDEDGE	32
1.1.9. 802.11be SISO SU MODE IN UNII-8 BAND – BANDEDGE	33
1.1.10. 802.11be SISO PARTIAL RU MODE IN UNII-8 BAND – BANDEDGE	34
1.1.11. 802.11a MIMO MODE IN UNII-8 BAND – BANDEDGE	35
1.1.12. 802.11be MIMO SU MODE IN UNII-8 BAND – BANDEDGE	36
1.1.13. 802.11be MIMO PARTIAL RU MODE IN UNII-8 BAND – BANDEDGE	37
1.1.14. 802.11a MIMO MODE IN UNII-8 BAND – SPURIOUS EMISSIONS	39
1.1.15. 802.11be MIMO MODE IN UNII-8 BAND – SPURIOUS EMISSIONS	40
1.2. TRANSMITTER OUTSIDE 6.115 - 7.125 GHz, 1- 18GHz (VLP)	47
1.2.1. 802.11be SISO/MIMO MODE IN UNII-5 BAND – LOW BANDEDGE	47
1.2.2. 802.11a SISO MODE IN UNII-8 BAND – BANDEDGE	47
1.2.3. 802.11be SISO SU MODE IN UNII-8 BAND – BANDEDGE	48
1.2.4. 802.11be SISO PARTIAL RU MODE IN UNII-8 BAND – BANDEDGE	49
1.2.5. 802.11a MIMO MODE IN UNII-8 BAND – BANDEDGE	50
1.2.6. 802.11be MIMO SU MODE IN UNII-8 BAND – BANDEDGE	51
1.2.7. 802.11be MIMO PARTIAL RU MODE IN UNII-8 BAND – BANDEDGE	52
1.2.8. 802.11a MIMO MODE IN UNII-8 BAND – SPURIOUS EMISSIONS	54
1.2.9. 802.11be MIMO MODE – SPURIOUS EMISSIONS	55
1.3. WORST CASE BELOW 1 GHz	61
1.4. WORST CASE 18-26 GHz	63
1.5. WORST CASE 26-40 GHz	65
2. AC POWER LINE CONDUCTED EMISSIONS	67
2.1. EUT WITH AC ADAPTER	68
2.2. EUT WITH LAPTOP	70
3. SPOT CHECK EVALUATION	72
3.1. MODEL DIFFERENCES	72
3.2. SPOT CHECK VERIFICATION RESULTS SUMMARY FOR A3713	73
3.3. SPOT CHECK VERIFICATION RESULTS SUMMARY FOR A3714	73
3.4. SPOT CHECK VERIFICATION RESULTS SUMMARY FOR A3715	74

1. RADIATED TEST RESULTS

LIMITS

FCC §15.35(b)
FCC §15.205 Restricted bands
§15.209 and FCC §15.407(b)(6) -Un-Restricted bands

RSS-GEN 8.1
RSS-GEN 8.9 Un-Restricted bands
RSS-GEN 8.10 Restricted bands
RSS 248 Issue 3 section 4.6.2a

Any emissions outside of the 5.925-7.125 GHz band must not exceed an e.i.r.p. of -27dBm/MHz rms and -7dBm/MHz Peak.

General field strength limits at frequencies above 30 MHz;

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

Unwanted Emissions in Restricted Bands	KDB 789033 D02, Sections II - G.3, G.4, G.5, and G.6
Unwanted Emissions in Non-Restricted Bands	KDB 789033 D02, Sections II - G.3, G.4, and G.5
Radiated Spurious Emissions Below 30MHz	ANSI C63.10, Section 6.4

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements in the 30-1000MHz range, 9kHz for peak and/or quasi-peak detection measurements in the 0.15-30MHz range, and 200Hz for peak and/or quasi-peak detection measurements in the 9 to 150kHz range. Peak detection is used unless otherwise noted as quasi-peak or average (9-90kHz and 110-490kHz).

For pre-scans above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 30 kHz for peak measurements.

For final measurements above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements and as applicable for average measurements.

The spectrum from 30 MHz to 1GHz and 18GHz to 40 GHz is investigated with the transmitter set to transmit at the channel with highest output power as worst-case scenario. 1GHz to 18GHz was set to the lowest, middle, and highest channels in the 6 GHz bands.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

Note: The limits in CFR 47, Part 15, Subpart C, paragraph 15.209(a), are identical to those in RSS-Gen section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as report in the table) using free space impedance of 377 Ohms. For example, the measurement at frequency X kHz resulted in a level of Y dBuV/m, which is equivalent to $Y-51.5 = Z$ dBuA/m, which has the same margin, W dB to the corresponding RSS-Gen Table 6 limit as it has to 15.209(a) limit. In addition:

KDB 414788 Open Field Site (OFS) and Chamber Correlation Justification

Based on FCC 15.31 (f) (2), measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed, and the chamber-measured test result is the worst-case test result.

RESULTS

The plots in these sections are for reference settings only for different bandwidths and different antennas.

1.1. TRANSMITTER OUTSIDE 5.925 - 7.125 GHz, 1- 18GHz (Dual Client)

1.1.1. 802.11be SISO SU MODE IN UNII-5 BAND – BANDEDGE

UNII-5 (SISO)	Channel Frequency MHz	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dBm)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (SU Mode)	5955	6	5.924202	-59.15	RMS	35.2	11.8	0.00	-36.20	-48.35	-27	-21.35	-	-	122	230	H
			5.924735	-45.47	Pk	35.2	11.8	0.00	-36.20	-34.67	-	-	-7	-27.67	122	230	H
			5.925000	-47.46	Pk	35.2	11.8	0.00	-36.20	-36.66	-	-	-7	-29.66	122	230	H
			5.925000	-59.69	RMS	35.2	11.8	0.00	-36.20	-48.89	-27	-21.89	-	-	122	230	H
			5.924202	-57.12	RMS	35.2	11.8	0.00	-36.20	-46.32	-27	-19.32	-	-	61	134	V
			5.924735	-42.11	Pk	35.2	11.8	0.00	-36.20	-31.31	-	-	-7	-24.31	61	134	V
			5.925000	-42.50	Pk	35.2	11.8	0.00	-36.20	-31.70	-	-	-7	-24.70	61	134	V
			5.925000	-57.73	RMS	35.2	11.8	0.00	-36.20	-46.93	-27	-19.93	-	-	61	134	V
			5.925	-43.57	Pk	35.3	11.8	0.00	-34.74	-31.21	-	-	-7	-24.21	316	238	H
		16	5.923868	-39.75	Pk	35.3	11.8	0.00	-34.72	-27.37	-	-	-7	-20.37	316	238	H
			5.925	-58.47	RMS	35.3	11.8	0.00	-34.74	-46.11	-27	-19.11	-	-	316	238	H
			5.924268	-58.01	RMS	35.3	11.8	0.00	-34.73	-45.64	-27	-18.64	-	-	316	238	H
			5.925	-50.46	Pk	35.3	11.8	0.00	-34.74	-38.10	-	-	-7	-31.1	270	169	V
			5.924402	-48.26	Pk	35.3	11.8	0.00	-34.73	-35.89	-	-	-7	-28.89	270	169	V
			5.925	-61.87	RMS	35.3	11.8	0.00	-34.74	-49.51	-27	-22.51	-	-	270	169	V
			5.923935	-61.25	RMS	35.3	11.8	0.00	-34.72	-48.87	-27	-21.87	-	-	270	169	V
EHT40 (SU Mode)	5965	6	5.925000	-48.45	Pk	35.2	11.8	0.00	-23.48	-24.93	-	-	-7	-17.93	84	133	H
			5.924602	-45.80	Pk	35.2	11.8	0.00	-23.48	-22.28	-	-	-7	-15.28	84	133	H
			5.925000	-63.48	RMS	35.2	11.8	0.00	-23.48	-39.96	-27	-12.96	-	-	84	133	H
			5.924535	-63.17	RMS	35.2	11.8	0.00	-23.48	-39.65	-27	-12.65	-	-	84	133	H
			5.925000	-45.55	Pk	35.2	11.8	0.00	-23.48	-22.03	-	-	-7	-15.03	55	134	V
			5.923868	-43.37	Pk	35.2	11.8	0.00	-23.48	-19.85	-	-	-7	-12.85	55	134	V
			5.925000	-61.76	RMS	35.2	11.8	0.00	-23.48	-38.24	-27	-11.24	-	-	55	134	V
			5.924535	-61.50	RMS	35.2	11.8	0.00	-23.48	-37.98	-27	-10.98	-	-	55	134	V
			5.925	-27.64	Pk	35.3	11.8	0.00	-34.74	-15.28	-	-	-7	-8.28	334	216	H
		16	5.924402	-24.02	Pk	35.3	11.8	0.00	-34.73	-11.65	-	-	-7	-4.65	334	216	H
			5.925	-43.78	RMS	35.3	11.8	0.00	-34.74	-31.42	-27	-4.42	-	-	334	216	H
			5.924868	-42.19	RMS	35.3	11.8	0.00	-34.74	-29.83	-27	-2.83	-	-	334	216	H
			5.925	-39.59	Pk	35.3	11.8	0.00	-34.74	-27.23	-	-	-7	-20.23	268	189	V
			5.923601	-36.84	Pk	35.3	11.8	0.00	-34.72	-24.46	-	-	-7	-17.46	268	189	V
			5.925	-54.25	RMS	35.3	11.8	0.00	-34.74	-41.89	-27	-14.89	-	-	268	189	V
			5.924068	-53.49	RMS	35.3	11.8	0.00	-34.72	-41.11	-27	-14.11	-	-	268	189	V
EHT80 (SU Mode)	5985	6	5.925000	-34.13	Pk	35.1	11.8	0.00	-37.99	-25.22	-	-	-7	-18.22	209	200	H
			5.922335	-32.88	Pk	35.1	11.8	0.00	-38.00	-23.98	-	-	-7	-16.98	209	200	H
			5.925000	-48.36	RMS	35.1	11.8	0.00	-37.99	-39.45	-27	-12.45	-	-	209	200	H
			5.924335	-47.38	RMS	35.1	11.8	0.00	-38.02	-38.50	-27	-11.50	-	-	209	200	H
			5.925000	-31.61	Pk	35.1	11.8	0.00	-37.99	-22.70	-	-	-7	-15.70	192	109	V
			5.914335	-28.21	Pk	35.1	11.8	0.00	-38.06	-19.37	-	-	-7	-12.37	192	109	V
			5.925000	-44.16	RMS	35.1	11.8	0.00	-37.99	-35.25	-27	-8.25	-	-	192	109	V
			5.923535	-43.97	RMS	35.1	11.8	0.00	-38.03	-35.10	-27	-8.10	-	-	192	109	V
			5.925	-29.55	Pk	35.3	11.8	0.00	-34.74	-17.19	-	-	-7	-10.19	332	216	H
		16	5.922535	-27.07	Pk	35.3	11.8	0.00	-34.73	-14.70	-	-	-7	-7.7	332	216	H
			5.925	-44.09	RMS	35.3	11.8	0.00	-34.74	-31.73	-27	-4.73	-	-	332	216	H
			5.924802	-43.21	RMS	35.3	11.8	0.00	-34.74	-30.85	-27	-3.85	-	-	332	216	H
			5.925	-43.15	Pk	35.3	11.8	0.00	-34.74	-30.79	-	-	-7	-23.79	238	156	V
			5.924335	-41.29	Pk	35.3	11.8	0.00	-34.73	-28.92	-	-	-7	-21.92	238	156	V
			5.925	-55.63	RMS	35.3	11.8	0.00	-34.74	-43.27	-27	-16.27	-	-	238	156	V
			5.922668	-55.67	RMS	35.3	11.8	0.00	-34.73	-43.30	-27	-16.30	-	-	238	156	V
EHT160 (SU Mode)	6025	6	5.892135	-30.06	Pk	35.1	11.8	0.00	-36.40	-19.56	-	-	-7	-12.56	98	151	H
			5.920068	-46.72	RMS	35.2	11.8	0.14	-36.29	-35.87	-27	-8.87	-	-	98	151	H
			5.925000	-35.29	Pk	35.2	11.8	0.00	-36.20	-24.49	-	-	-7	-17.49	98	151	H
			5.925000	-48.47	RMS	35.2	11.8	0.14	-36.20	-37.53	-27	-10.53	-	-	98	151	H
			5.892201	-28.61	Pk	35.1	11.8	0.00	-36.40	-18.11	-	-	-7	-11.11	60	111	V
			5.923801	-45.12	RMS	35.2	11.8	0.14	-36.18	-34.16	-27	-7.16	-	-	60	111	V
			5.925000	-33.03	Pk	35.2	11.8	0.00	-36.20	-22.23	-	-	-7	-15.23	60	111	V
			5.925000	-45.77	RMS	35.2	11.8	0.14	-36.20	-34.83	-27	-7.83	-	-	60	111	V
		16	5.925	-29.44	Pk	35.3	11.8	0.00	-34.74	-17.08	-	-	-7	-10.08	327	102	H
			5.901335	-26.51	Pk	35.2	11.8	0.00	-34.91	-14.42	-	-	-7	-7.42	327	102	H
			5.925	-43.23	RMS	35.3	11.8	0.14	-34.74	-30.73	-27	-3.73	-	-	327	102	H
			5.919268	-41.99	RMS	35.2	11.8	0.14	-34.77	-29.62	-27	-2.62	-	-	327	102	H
			5.925	-41.47	Pk	35.3	11.8	0.00	-34.74	-29.11	-	-	-7	-22.11	261	190	V
			5.901268	-36.89	Pk	35.2	11.8	0.00	-34.91	-24.80	-	-	-7	-17.8	261	190	V
			5.925	-53.73	RMS	35.3	11.8	0.14	-34.74	-41.23	-27	-14.23	-	-	261	190	V
			5.923801	-52.97	RMS	35.3	11.8	0.14	-34.72	-40.45	-27	-13.45	-	-	261	190	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.2. 802.11be SISO PARTIAL RU MODE IN UNII-5 BAND – BANDEDGE

UNII-5 (SISO)	Channel Frequency MHz	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (26T RU0)	5955	6	5.925000	-50.45	Pk	35.6	11.8	0.00	-36.66	-39.71	-	-	-7	-32.71	310	199	H
			5.897535	-48.39	Pk	35.5	11.8	0.00	-36.66	-37.75	-	-	-7	-30.75	310	199	H
			5.925000	-61.97	RMS	35.6	11.8	0.00	-36.66	-51.23	-27	-24.23	-	-	310	199	H
			5.924002	-60.56	RMS	35.6	11.8	0.00	-36.69	-49.85	-27	-22.85	-	-	310	199	H
			5.925000	-50.52	Pk	35.6	11.8	0.00	-36.66	-39.78	-	-	-7	-32.78	269	131	V
			5.795134	-48.00	Pk	35.2	11.8	0.00	-36.72	-37.72	-	-	-7	-30.72	269	131	V
			5.925000	-60.69	RMS	35.6	11.8	0.00	-36.66	-49.95	-27	-22.95	-	-	269	131	V
			5.924802	-60.34	RMS	35.6	11.8	0.00	-36.67	-49.61	-27	-22.61	-	-	269	131	V
		16	5.874001	-48.05	Pk	35.0	11.8	0.00	-36.40	-37.65	-	-	-7	-30.65	334	201	H
			5.916335	-60.32	RMS	35.2	11.8	0.00	-36.30	-49.62	-27	-22.62	-	-	334	201	H
			5.925000	-50.67	Pk	35.2	11.8	0.00	-36.20	-39.87	-	-	-7	-32.87	334	201	H
			5.925000	-61.22	RMS	35.2	11.8	0.00	-36.20	-50.42	-27	-23.42	-	-	334	201	H
			5.899201	-48.07	Pk	35.1	11.8	0.00	-36.40	-37.57	-	-	-7	-30.57	264	177	V
			5.906268	-60.46	RMS	35.2	11.8	0.00	-36.20	-49.66	-27	-22.66	-	-	264	177	V
			5.925000	-51.08	Pk	35.2	11.8	0.00	-36.20	-40.28	-	-	-7	-33.28	264	177	V
			5.925000	-61.70	RMS	35.2	11.8	0.00	-36.20	-50.90	-27	-23.90	-	-	264	177	V
EHT20 (52+26T RU70)	5955	6	5.925000	-50.47	Pk	35.6	11.8	0.00	-36.66	-39.73	-	-	-7	-32.73	310	199	H
			5.813601	-46.79	Pk	35.3	11.8	0.00	-36.61	-36.30	-	-	-7	-29.3	310	199	H
			5.925000	-61.53	RMS	35.6	11.8	0.00	-36.66	-50.79	-27	-23.79	-	-	310	199	H
			5.878868	-60.19	RMS	35.4	11.8	0.00	-36.69	-49.68	-27	-22.68	-	-	310	199	H
			5.925000	-50.82	Pk	35.6	11.8	0.00	-36.66	-40.08	-	-	-7	-33.08	269	131	V
			5.871201	-47.82	Pk	35.3	11.8	0.00	-36.64	-37.36	-	-	-7	-30.36	269	131	V
			5.925000	-61.70	RMS	35.6	11.8	0.00	-36.66	-50.96	-27	-23.96	-	-	269	131	V
			5.896068	-60.42	RMS	35.5	11.8	0.00	-36.64	-49.76	-27	-22.76	-	-	269	131	V
		16	5.701067	-47.17	Pk	35.0	11.8	0.00	-36.91	-37.28	-	-	-7	-30.28	335	201	H
			5.923135	-60.17	RMS	35.2	11.8	0.00	-36.11	-49.28	-27	-22.28	-	-	335	201	H
			5.925000	-51.10	Pk	35.2	11.8	0.00	-36.20	-40.30	-	-	-7	-33.3	335	201	H
			5.925000	-60.66	RMS	35.2	11.8	0.00	-36.20	-49.86	-27	-22.86	-	-	335	201	H
			5.639400	-47.29	Pk	35.0	11.8	0.00	-37.10	-37.59	-	-	-7	-30.59	263	177	V
			5.922468	-60.68	RMS	35.2	11.8	0.00	-36.15	-49.83	-27	-22.83	-	-	263	177	V
			5.925000	-50.47	Pk	35.2	11.8	0.00	-36.20	-39.67	-	-	-7	-32.67	263	177	V
			5.925000	-61.70	RMS	35.2	11.8	0.00	-36.20	-50.90	-27	-23.90	-	-	263	177	V
EHT80 (48+242 T RU93)	5985	6	5.925000	-36.54	Pk	35.6	11.8	0.00	-36.66	-25.80	-	-	-7	-18.80	61	244	H
			5.924802	-35.89	Pk	35.6	11.8	0.00	-36.67	-25.16	-	-	-7	-18.16	61	244	H
			5.925000	-54.81	RMS	35.6	11.8	0.00	-36.66	-44.07	-27	-17.07	-	-	61	244	H
			5.922601	-55.11	RMS	35.6	11.8	0.00	-36.67	-44.38	-27	-17.38	-	-	61	244	H
			5.925000	-31.22	Pk	35.6	11.8	0.00	-36.66	-20.48	-	-	-7	-13.48	4	139	V
			5.924868	-30.97	Pk	35.6	11.8	0.00	-36.66	-20.23	-	-	-7	-13.23	4	139	V
			5.925000	-51.26	RMS	35.6	11.8	0.00	-36.66	-40.52	-27	-13.52	-	-	4	139	V
			5.924068	-50.09	RMS	35.6	11.8	0.00	-36.69	-39.38	-27	-12.38	-	-	4	139	V
		16	5.925000	-37.23	Pk	35.6	11.8	0.00	-36.66	-26.49	-	-	-7	-19.49	189	168	H
			5.922001	-33.57	Pk	35.6	11.8	0.00	-36.68	-22.85	-	-	-7	-15.85	189	168	H
			5.925000	-53.17	RMS	35.6	11.8	0.00	-36.66	-42.43	-27	-15.43	-	-	189	168	H
			5.923935	-52.12	RMS	35.6	11.8	0.00	-36.69	-41.41	-27	-14.41	-	-	189	168	H
			5.925000	-47.44	Pk	35.6	11.8	0.00	-36.66	-36.70	-	-	-7	-29.70	168	216	V
			5.921735	-45.62	Pk	35.6	11.8	0.00	-36.69	-34.91	-	-	-7	-27.91	168	216	V
			5.925000	-60.40	RMS	35.6	11.8	0.00	-36.66	-49.66	-27	-22.66	-	-	168	216	V
			5.924802	-60.13	RMS	35.6	11.8	0.00	-36.67	-49.40	-27	-22.40	-	-	168	216	V
EHT160 (996+484 T S95)	6025	6	5.872401	-36.63	Pk	35.0	11.8	0.00	-36.44	-26.27	-	-	-7	-19.27	98	151	H
			5.924868	-53.13	RMS	35.2	11.8	0.00	-36.20	-42.33	-27	-15.33	-	-	98	151	H
			5.925000	-39.87	Pk	35.2	11.8	0.00	-36.20	-29.07	-	-	-7	-22.07	98	151	H
			5.925000	-53.87	RMS	35.2	11.8	0.00	-36.20	-43.07	-27	-16.07	-	-	98	151	H
			5.872135	-35.25	Pk	35.0	11.8	0.00	-36.41	-24.86	-	-	-7	-17.86	60	111	V
			5.922601	-52.31	RMS	35.2	11.8	0.00	-36.14	-41.45	-27	-14.45	-	-	60	111	V
			5.925000	-38.95	Pk	35.2	11.8	0.00	-36.20	-28.15	-	-	-7	-21.15	60	111	V
			5.925000	-53.41	RMS	35.2	11.8	0.00	-36.20	-42.61	-27	-15.61	-	-	60	111	V
		16	5.925000	-35.18	Pk	35.6	11.8	0.00	-36.66	-24.44	-	-	-7	-17.44	193	196	H
			5.872135	-32.89	Pk	35.3	11.8	0.00	-36.63	-22.42	-	-	-7	-15.42	193	196	H
			5.925000	-50.29	RMS	35.6	11.8	0.00	-36.66	-39.55	-27	-12.55	-	-	193	196	H
			5.924935	-49.64	RMS	35.6	11.8	0.00	-36.66	-38.90	-27	-11.90	-	-	193	196	H
			5.925000	-50.72	Pk	35.6	11.8	0.00	-36.66	-39.98	-	-	-7	-32.98	159	131	V
			5.872135	-45.28	Pk	35.3	11.8	0.00	-36.63	-34.81	-	-	-7	-27.81	159	131	V
			5.925000	-60.95	RMS	35.6	11.8	0.00	-36.66	-50.21	-27	-23.21	-	-	159	131	V
			5.923068	-59.71	RMS	35.6	11.8	0.00	-36.67	-48.98	-27	-21.98	-	-	159	131	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.3. 802.11be MIMO SU MODE IN UNII-5 BAND - BANDEDGE

UNII-5 (MIMO CDD)	Channel Frequency MHz	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (SU Mode)	5955	6+16	5.924535	-41.93	Pk	35.2	11.8	0.00	-36.20	-31.13	-	-	-7	-24.13	85	155	H
			5.924668	-58.39	RMS	35.2	11.8	0.00	-36.20	-47.59	-27	-20.59	-	-	85	155	H
			5.925000	-47.24	Pk	35.2	11.8	0.00	-36.20	-36.44	-	-	-7	-29.44	85	155	H
			5.925000	-59.61	RMS	35.2	11.8	0.00	-36.20	-48.81	-27	-21.81	-	-	85	155	H
			* 7.339968	-48.46	Pk	35.7	11.8	0.00	-35.60	-36.56	-	-	-21.2	-15.36	75	263	V
			* 7.279224	-60.39	RMS	35.7	11.8	0.00	-35.50	-48.39	-41.2	-7.19	-	-	75	263	V
			7.125000	-46.23	Pk	35.7	11.8	0.00	-35.70	-34.43	-	-	-7	-27.43	75	263	V
			7.125000	-58.29	RMS	35.7	11.8	0.00	-35.70	-46.49	-27	-19.49	-	-	75	263	V
EHT40 (SU Mode)	5965	6+16	5.925000	-44.56	Pk	35.2	11.8	0.00	-23.48	-21.04	-	-	-7	-14.04	83	145	H
			5.923935	-44.92	Pk	35.2	11.8	0.00	-23.48	-21.40	-	-	-7	-14.40	83	145	H
			5.925000	-62.34	RMS	35.2	11.8	0.00	-23.48	-38.82	-27	-11.82	-	-	83	145	H
			5.924535	-61.37	RMS	35.2	11.8	0.00	-23.48	-37.85	-27	-10.85	-	-	83	145	H
			5.925000	-45.86	Pk	35.2	11.8	0.00	-23.48	-22.34	-	-	-7	-15.34	34	171	V
			5.923401	-39.40	Pk	35.2	11.8	0.00	-23.49	-15.89	-	-	-7	-8.89	34	171	V
			5.925000	-59.08	RMS	35.2	11.8	0.00	-23.48	-35.56	-27	-8.56	-	-	34	171	V
			5.923535	-55.39	RMS	35.2	11.8	0.00	-23.48	-31.87	-27	-4.87	-	-	34	171	V
EHT80 (SU Mode)	5985	6+16	5.925000	-35.67	Pk	35.6	11.8	0.00	-36.66	-24.93	-	-	-7	-17.93	58	233	H
			5.920601	-31.83	Pk	35.6	11.8	0.00	-36.71	-21.14	-	-	-7	-14.14	58	233	H
			5.925000	-49.29	RMS	35.6	11.8	0.00	-36.66	-38.55	-27	-11.55	-	-	58	233	H
			5.920535	-48.44	RMS	35.6	11.8	0.00	-36.71	-37.75	-27	-10.75	-	-	58	233	H
			5.925000	-32.77	Pk	35.6	11.8	0.00	-36.66	-22.03	-	-	-7	-15.03	351	110	V
			5.923401	-27.98	Pk	35.6	11.8	0.00	-36.68	-17.26	-	-	-7	-10.26	351	110	V
			5.925000	-46.37	RMS	35.6	11.8	0.00	-36.66	-35.63	-27	-8.63	-	-	351	110	V
			5.923668	-41.38	RMS	35.6	11.8	0.00	-36.68	-30.66	-27	-3.66	-	-	351	110	V
EHT160 (SU Mode)	6025	6+16	5.925000	-31.09	Pk	35.1	11.8	0.00	-37.99	-22.18	-	-	-7	-15.18	213	263	H
			5.900268	-24.85	Pk	35.0	11.8	0.00	-38.12	-16.17	-	-	-7	-9.17	213	263	H
			5.925000	-43.30	RMS	35.1	11.8	0.14	-37.99	-34.25	-27	-7.25	-	-	213	263	H
			5.920468	-41.76	RMS	35.1	11.8	0.14	-38.03	-32.75	-27	-5.75	-	-	213	263	H
			5.925000	-26.69	Pk	35.1	11.8	0.00	-37.99	-17.78	-	-	-7	-10.78	191	181	V
			5.900335	-22.40	Pk	35.0	11.8	0.00	-38.12	-13.72	-	-	-7	-6.72	191	181	V
			5.925000	-39.76	RMS	35.1	11.8	0.14	-37.99	-30.71	-27	-3.71	-	-	191	181	V
			5.915135	-38.77	RMS	35.1	11.8	0.14	-38.07	-29.80	-27	-2.80	-	-	191	181	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection


1.1.4. 802.11be MIMO PARTIAL RU MODE IN UNII-5 BAND - BANDEDGE

UNII-5 (MIMO CDD)	Channel Frequency MHz	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (26T RU0)	5955	6+16	5.925000	-50.85	Pk	35.6	11.8	0.00	-36.66	-40.11	-	-	-7	-33.11	53	308	H
			5.924935	-48.58	Pk	35.6	11.8	0.00	-36.66	-37.84	-	-	-7	-30.84	53	308	H
			5.925000	-61.74	RMS	35.6	11.8	0.00	-36.66	-51.00	-27	-24.00	-	-	53	308	H
			5.898068	-60.47	RMS	35.5	11.8	0.00	-36.66	-49.83	-27	-22.83	-	-	53	308	H
			5.925000	-51.36	Pk	35.6	11.8	0.00	-36.66	-40.62	-	-	-7	-33.62	295	179	V
			5.864335	-47.69	Pk	35.3	11.8	0.00	-36.70	-37.29	-	-	-	-30.29	295	179	V
			5.925000	-61.26	RMS	35.6	11.8	0.00	-36.66	-50.52	-27	-23.52	-	-	295	179	V
			5.910868	-60.16	RMS	35.6	11.8	0.00	-36.64	-49.40	-27	-22.40	-	-	295	179	V
EHT20 (52+26T RU70)	5955	6+16	5.925000	-50.35	Pk	35.6	11.8	0.00	-36.66	-39.61	-	-	-7	-32.61	53	308	H
			5.879601	-48.74	Pk	35.4	11.8	0.00	-36.67	-38.21	-	-	-7	-31.21	53	308	H
			5.925000	-62.19	RMS	35.6	11.8	0.00	-36.66	-51.45	-27	-24.45	-	-	53	308	H
			5.909068	-60.50	RMS	35.6	11.8	0.00	-36.67	-49.77	-27	-22.77	-	-	53	308	H
			5.925000	-51.00	Pk	35.6	11.8	0.00	-36.66	-40.26	-	-	-7	-33.26	295	179	V
			5.644200	-47.71	Pk	34.8	11.8	0.00	-36.89	-38.00	-	-	-7	-31	295	179	V
			5.925000	-61.06	RMS	35.6	11.8	0.00	-36.66	-50.32	-27	-23.32	-	-	295	179	V
			5.891801	-60.24	RMS	35.5	11.8	0.00	-36.71	-49.65	-27	-22.65	-	-	295	179	V
EHT80 (484+242T RU93)	5985	6+16	5.925000	-43.93	Pk	35.3	11.8	0.00	-34.74	-31.57	-	-	-7.00	-24.57	183.00	247	H
			5.919535	-43.01	Pk	35.2	11.8	0.00	-34.76	-30.77	-	-	-7.00	-23.77	183.00	247	H
			5.925000	-58.97	RMS	35.3	11.8	0.00	-34.74	-46.61	-27.00	-19.61	-	-	183.00	247	H
			5.924735	-58.26	RMS	35.3	11.8	0.00	-34.73	-45.89	-27.00	-18.89	-	-	183.00	247	H
			5.925000	-41.88	Pk	35.3	11.8	0.00	-34.74	-29.52	-	-	-7	-22.52	344	174	V
			5.921668	-37.01	Pk	35.3	11.8	0.00	-34.75	-24.66	-	-	-7	-17.66	344	174	V
			5.925000	-55.54	RMS	35.3	11.8	0.00	-34.74	-43.18	-27	-16.18	-	-	344	174	V
			5.920935	-54.37	RMS	35.2	11.8	0.00	-34.75	-42.12	-27	-15.12	-	-	344	174	V
EHT160 (996+484T S95)	6025	6+16	5.925000	-49.94	Pk	35.3	11.8	0.00	-34.74	-37.58	-	-	-7	-30.58	180	178	H
			5.871268	-44.54	Pk	35.2	11.8	0.00	-34.92	-32.46	-	-	-7	-25.46	180	178	H
			5.925000	-61.86	RMS	35.3	11.8	0.00	-34.74	-49.50	-27	-22.50	-	-	180	178	H
			5.921601	-60.76	RMS	35.3	11.8	0.00	-34.75	-48.41	-27	-21.41	-	-	180	178	H
			5.925000	-45.78	Pk	35.3	11.8	0.00	-34.74	-33.42	-	-	-7	-26.42	357	143	V
			5.871068	-37.84	Pk	35.2	11.8	0.00	-34.91	-25.75	-	-	-7	-18.75	357	143	V
			5.925000	-58.28	RMS	35.3	11.8	0.00	-34.74	-45.92	-27	-18.92	-	-	357	143	V
			5.915868	-57.26	RMS	35.2	11.8	0.00	-34.78	-45.04	-27	-18.04	-	-	357	143	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

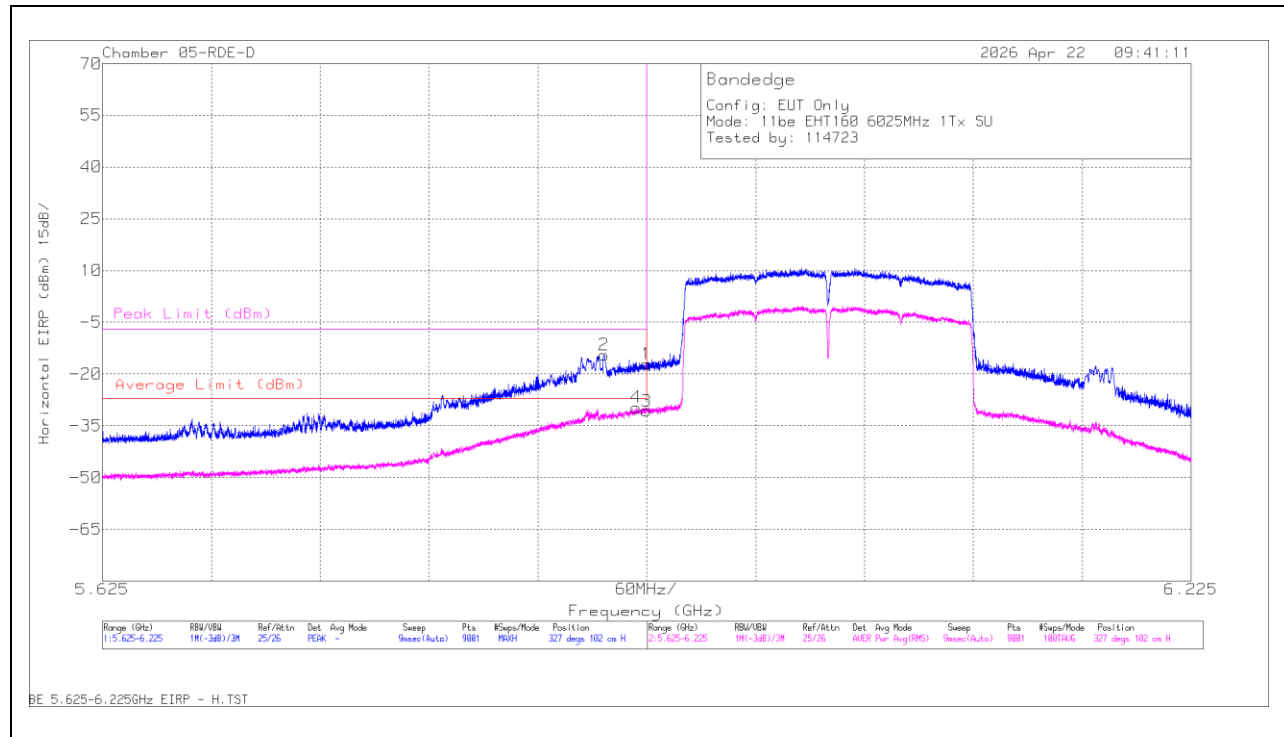WORST-CASE BANDEDGE (LOW CHANNEL)**802.11be EHT160 / 15 & 6025MHz / 1Tx – ANT 16 / SISO / SU:****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)
1	5.925000	-29.44	Pk	35.3	11.8	0.00	-34.74	-17.08	-	-	-7	-10.08	327	102
2	5.901335	-26.51	Pk	35.2	11.8	0.00	-34.91	-14.42	-	-	-7	-7.42	327	102
3	5.925000	-43.23	RMS	35.3	11.8	0.14	-34.74	-30.73	-27	-3.73	-	-	327	102
4	5.919268	-41.99	RMS	35.2	11.8	0.14	-34.77	-29.62	-27	-2.62	-	-	327	102

Pk - Peak detector

RMS - RMS detection

20MHz

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK-U - U-NII: Maximum Peak
ADR - U-NII AD primary method, RMS average

20MHz (cont.)

UNII-5 (MIMO CDD)	Channel Frequency MHz	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbt/ Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (52+26T RU70)	5955	6+16	* 11.919525	55.86	PK-U	38.8	0.00	-44.04	50.62	-	-	74	-23.38	0	100	H
			* 11.917296	44.11	ADR	38.8	0.00	-44.05	38.86	54	-15.14	-	-	0	100	H
			* 17.864833	55.62	PK-U	41.2	0.00	-41.39	55.43	-	-	74	-18.57	0	100	H
			* 17.847412	43.90	ADR	41.2	0.00	-41.10	44.00	54	-10	-	-	0	100	H
			* 11.894677	55.43	PK-U	38.7	0.00	-44.19	49.94	-	-	74	-24.06	0	201	V
			* 11.89553	44.00	ADR	38.7	0.00	-44.16	38.54	54	-15.46	-	-	0	201	V
			* 17.849956	56.08	PK-U	41.2	0.00	-41.19	56.09	-	-	74	-17.91	0	200	V
			* 17.866615	43.80	ADR	41.2	0.00	-41.36	43.64	54	-10.36	-	-	0	200	V
			2.958813	43.62	PK-U	32.7	0.00	-25.79	50.53	-	-	88.2	-37.67	0	201	V
			2.962721	43.09	PK-U	32.7	0.00	-25.80	49.99	-	-	88.2	-38.21	0	100	H
			2.982863	31.54	ADR	32.8	0.00	-25.72	38.62	68.2	-29.58	-	-	0	100	H
			2.996067	31.45	ADR	32.8	0.00	-25.71	38.54	68.2	-29.66	-	-	0	201	V
			* 12.368465	55.74	PK-U	38.8	0.00	-44.23	50.31	-	-	74	-23.69	0	100	H
			* 12.360337	43.92	ADR	38.8	0.00	-44.29	38.43	54	-15.57	-	-	0	100	H
EHT20 (52+26T RU71)	6175	6+16	* 12.359044	55.87	PK-U	38.8	0.00	-44.23	50.44	-	-	74	-23.56	0	201	V
			* 12.359629	44.09	ADR	38.8	0.00	-44.26	38.63	54	-15.37	-	-	0	201	V
			2.046198	43.00	PK-U	31.6	0.00	-27.01	47.59	-	-	88.2	-40.61	0	100	H
			2.049264	42.52	PK-U	31.6	0.00	-26.97	47.15	-	-	88.2	-41.05	0	201	V
			2.065822	31.00	ADR	31.6	0.00	-26.96	35.64	68.2	-32.56	-	-	0	100	H
			2.074796	31.11	ADR	31.6	0.00	-26.98	35.73	68.2	-32.47	-	-	0	201	V
			3.079052	30.97	ADR	33.0	0.00	-25.64	38.33	68.2	-29.87	-	-	0	200	V
			3.089737	43.08	PK-U	33.0	0.00	-25.52	50.56	-	-	88.2	-37.64	0	200	V
			3.094088	30.99	ADR	33.0	0.00	-25.57	38.42	68.2	-29.78	-	-	0	100	H
			3.096854	42.50	PK-U	33.0	0.00	-25.59	49.91	-	-	88.2	-38.29	0	100	H
			2.123453	31.17	ADR	31.5	0.00	-26.80	35.87	68.2	-32.33	-	-	0	201	V
			2.127112	31.30	ADR	31.5	0.00	-26.71	36.09	68.2	-32.11	-	-	0	100	H
			2.129112	42.78	PK-U	31.5	0.00	-26.70	47.58	-	-	88.2	-40.62	0	100	H
			2.135292	43.17	PK-U	31.5	0.00	-26.79	47.88	-	-	88.2	-40.32	0	201	V
EHT20 (52+26T RU72)	6415	6+16	3.188464	42.60	PK-U	33.0	0.00	-25.49	50.11	-	-	88.2	-38.09	0	100	H
			3.192695	31.27	ADR	33.0	0.00	-25.41	38.86	68.2	-29.34	-	-	0	100	H
			3.205306	42.46	PK-U	33.0	0.00	-25.51	49.95	-	-	88.2	-38.25	0	200	V
			3.216094	30.94	ADR	33.0	0.00	-25.63	38.31	68.2	-29.89	-	-	0	200	V
			12.833415	56.47	PK-U	39.0	0.00	-43.88	51.59	-	-	88.2	-36.61	0	100	H
			12.834212	44.41	ADR	39.0	0.00	-43.86	39.55	68.2	-28.65	-	-	0	100	H
			12.838799	55.43	PK-U	39.0	0.00	-43.91	50.52	-	-	88.2	-37.68	0	201	V
			12.843944	44.35	ADR	39.0	0.00	-43.96	39.39	68.2	-28.81	-	-	0	201	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

40MHz

UNII-5 (MIMO CDD)	Channel Frequency MHz	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbt/ Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT40 (SU Mode)	5965	6+16	* 1.703565	46.99	ADR	29.2	0.00	-47.75	28.44	54	-25.56	-	-	360	200	V
			* 1.703685	58.50	PK-U	29.2	0.00	-47.75	39.95	-	-	74	-34.05	360	200	V
			* 1.705820	47.08	ADR	29.3	0.00	-47.73	28.65	54	-25.35	-	-	360	101	H
			* 1.707940	58.87	PK-U	29.3	0.00	-47.75	40.42	-	-	74	-33.58	360	101	H
			* 12.109179	41.65	ADR	38.9	0.00	-41.80	38.75	54	-15.25	-	-	360	200	V
			* 12.113195	41.73	ADR	38.9	0.00	-41.71	38.92	54	-15.08	-	-	360	200	H
			* 12.134069	53.51	PK-U	38.9	0.00	-41.38	51.03	-	-	74	-29.97	360	200	V
			* 12.147024	54.09	PK-U	38.9	0.00	-41.70	51.29	-	-	74	-22.71	360	200	H
			* 2.748559	45.41	ADR	32.4	0.00	-46.51	31.30	54	-22.7	-	-	360	101	H
			* 2.749212	45.43	ADR	32.4	0.00	-46.51	31.32	54	-22.68	-	-	360	101	V
			* 2.752669	57.07	PK-U	32.4	0.00	-46.51	42.96	-	-	74	-31.04	360	101	V
			* 2.756438	58.09	PK-U	32.4	0.00	-46.48	44.01	-	-	74	-29.99	360	101	H
	6165	6+16	* 1.703978	58.69	PK-U	29.2	0.00	-47.75	40.14	-	-	74	-33.86	360	101	V
			* 1.704933	47.22	ADR	29.2	0.00	-47.74	28.68	54	-25.32	-	-	360	101	V
			* 1.707358	47.18	ADR	29.3	0.00	-47.74	28.74	54	-25.26	-	-	360	200	H
			* 1.707935	58.75	PK-U	29.3	0.00	-47.75	40.30	-	-	74	-33.7	360	200	H
			* 12.411500	41.56	ADR	39.0	0.00	-41.40	39.16	54	-14.84	-	-	360	101	H
			* 12.428746	53.29	PK-U	39.0	0.00	-41.42	50.87	-	-	74	-23.13	360	101	V
			* 12.440253	41.74	ADR	39.0	0.00	-41.60	39.14	54	-14.86	-	-	360	101	V
			* 12.440401	53.66	PK-U	39.0	0.00	-41.60	51.06	-	-	74	-22.94	360	101	H
			* 2.704890	45.40	ADR	32.5	0.00	-46.48	31.42	54	-22.58	-	-	360	101	H
			* 2.709280	56.94	PK-U	32.5	0.00	-46.47	42.97	-	-	74	-31.03	360	101	H
			* 2.738817	56.79	PK-U	32.4	0.00	-46.53	42.66	-	-	74	-31.34	360	200	V
			* 2.741137	45.58	ADR	32.4	0.00	-46.52	31.46	54	-22.54	-	-	360	200	V
	6405	6+16	* 1.697641	46.91	ADR	29.1	0.00	-47.77	28.24	54	-25.76	-	-	360	200	V
			* 1.697983	58.76	PK-U	29.1	0.00	-47.77	40.09	-	-	74	-33.91	360	200	V
			* 1.701222	58.80	PK-U	29.2	0.00	-47.75	40.25	-	-	74	-33.75	360	199	H
			* 1.708466	46.90	ADR	29.3	0.00	-47.75	28.45	54	-25.55	-	-	360	199	H
			* 2.359377	58.50	PK-U	32.2	0.00	-47.48	43.22	-	-	74	-30.78	360	101	H
			* 2.368247	46.58	ADR	32.2	0.00	-47.50	31.28	54	-22.72	-	-	360	101	H
			* 2.371766	46.39	ADR	32.2	0.00	-47.49	31.10	54	-22.9	-	-	360	200	V
			12.838779	53.26	PK-U	39.3	0.00	-41.33	51.23	-	-	88.2	-36.97	360	101	V
			12.845274	53.73	PK-U	39.3	0.00	-41.43	51.60	-	-	88.2	-36.6	360	101	H
			12.864048	41.58	ADR	39.3	0.00	-41.34	39.54	68.2	-28.66	-	-	360	101	V
			12.874287	41.44	ADR	39.3	0.00	-41.22	39.52	68.2	-28.68	-	-	360	101	H
			2.390013	57.96	PK-U	32.3	0.00	-47.35	42.91	-	-	88.2	-45.29	360	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

80MHz

UNII-5 (MIMO CDD)	Channel Frequency MHz	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbt/ Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT80 (SU Mode)	5985	6+16	* 3.784128	52.50	PK-U	33.4	0.00	-41.90	44.00	-	-	74	-30	0	101	H
			* 3.800962	40.71	ADR	33.5	0.00	-41.90	32.31	54	-21.69	-	-	0	101	H
			* 3.805246	52.31	PK-U	33.5	0.00	-41.80	44.01	-	-	74	-29.99	0	199	V
			* 3.802970	40.75	ADR	33.5	0.00	-41.80	32.45	54	-21.55	-	-	0	199	V
			* 11.959437	46.61	PK-U	38.6	0.00	-34.60	50.61	-	-	74	-23.39	0	101	H
			* 11.994104	34.83	ADR	38.6	0.00	-34.00	39.43	54	-14.57	-	-	0	101	H
			* 11.979097	47.85	PK-U	38.7	0.00	-34.30	52.25	-	-	74	-21.75	0	199	V
			* 11.988602	35.36	ADR	38.6	0.00	-34.10	39.86	54	-14.14	-	-	0	199	V
			1.779168	45.92	ADR	30.4	0.00	-46.00	30.32	68.2	-37.88	-	-	0	199	V
			1.779977	45.78	ADR	30.4	0.00	-46.00	30.18	68.2	-38.02	-	-	0	101	H
			1.782203	57.54	PK-U	30.4	0.00	-46.00	41.94	-	-	88.2	-46.26	0	101	H
			1.788887	57.86	PK-U	30.6	0.00	-46.00	42.46	-	-	88.2	-45.74	0	199	V
	6145	6+16	* 12.272308	46.99	PK-U	38.9	0.00	-34.70	51.19	-	-	74	-22.81	251	199	H
			* 12.297474	46.19	PK-U	38.9	0.00	-34.80	50.29	-	-	74	-23.71	251	199	V
			* 12.299265	34.13	ADR	38.9	0.00	-34.80	38.23	54	-15.77	-	-	251	199	H
			* 12.300661	34.31	ADR	38.9	0.00	-34.80	38.41	54	-15.59	-	-	251	199	V
			* 2.732824	54.14	PK-U	31.8	0.00	-43.40	42.54	-	-	74	-31.46	251	199	V
			* 2.736157	53.80	PK-U	31.7	0.00	-43.40	42.10	-	-	74	-31.9	251	101	H
			* 2.740508	42.19	ADR	31.7	0.00	-43.40	30.49	54	-23.51	-	-	251	199	V
			* 2.741135	42.00	ADR	31.7	0.00	-43.40	30.30	54	-23.7	-	-	251	101	H
			* 4.699673	39.74	ADR	34.2	0.00	-40.70	33.24	54	-20.76	-	-	251	199	H
			* 4.703676	51.34	PK-U	34.2	0.00	-40.70	44.84	-	-	74	-29.16	251	199	V
			* 4.709849	51.15	PK-U	34.2	0.00	-40.70	44.65	-	-	74	-29.35	251	199	H
			* 4.711413	39.81	ADR	34.2	0.00	-40.70	33.31	54	-20.69	-	-	251	199	V
	6385	6+16	* 11.935826	47.26	PK-U	38.6	0.00	-34.40	51.46	-	-	74	-22.54	360	200	V
			* 11.939308	47.23	PK-U	38.6	0.00	-34.40	51.43	-	-	74	-22.57	360	200	H
			* 11.944351	35.31	ADR	38.6	0.00	-34.40	39.51	54	-14.49	-	-	360	200	H
			* 11.948458	35.51	ADR	38.6	0.00	-34.40	39.71	54	-14.29	-	-	360	200	V
			* 2.230268	43.86	ADR	31.3	0.00	-45.10	30.06	54	-23.94	-	-	360	200	H
			* 2.234285	44.09	ADR	31.3	0.00	-45.10	30.29	54	-23.71	-	-	360	200	V
			* 2.262709	55.79	PK-U	31.7	0.00	-44.90	42.59	-	-	74	-31.41	360	200	V
			* 2.264193	56.19	PK-U	31.8	0.00	-44.90	43.09	-	-	74	-30.91	360	200	H
			* 4.704984	51.63	PK-U	34.2	0.00	-40.70	45.13	-	-	74	-28.87	360	200	V
			* 4.708278	51.41	PK-U	34.2	0.00	-40.70	44.91	-	-	74	-29.09	360	101	H
			* 4.712597	39.43	ADR	34.2	0.00	-40.70	32.93	54	-21.07	-	-	360	101	H
			* 4.716552	39.65	ADR	34.2	0.00	-40.70	33.15	54	-20.85	-	-	360	200	V
EHT80 (484+242T RU90)	6385	6+16	* 3.347716	56.86	PK-U	32.9	0.00	-46.47	43.29	-	-	74	-30.71	360	200	V
			* 3.347920	45.14	ADR	32.9	0.00	-46.46	31.58	54	-22.42	-	-	360	200	V
			* 4.391816	58.24	PK-U	33.8	0.00	-46.91	45.13	-	-	74	-28.87	360	200	V
			* 12.128926	55.60	PK-U	38.9	0.00	-42.59	51.91	-	-	74	-22.09	360	101	H
			* 12.140369	43.75	ADR	39.0	0.00	-42.45	40.30	54	-13.7	-	-	360	101	H
			* 12.137774	55.59	PK-U	38.9	0.00	-42.50	51.99	-	-	74	-22.01	360	200	V
			* 12.136374	43.71	ADR	38.9	0.00	-42.47	40.14	54	-13.86	-	-	360	200	V
			* 3.30948	45.01	ADR	32.9	0.00	-46.35	31.56	68.2	-36.64	-	-	360	200	H
			3.331251	57.57	PK-U	32.9	0.00	-46.45	44.02	-	-	88.2	-44.18	360	200	H
			4.401593	58.28	PK-U	33.8	0.00	-46.84	45.24	-	-	88.2	-42.96	360	200	H
			4.403962	46.22	ADR	33.8	0.00	-46.90	33.12	68.2	-35.08	-	-	360	200	V
			4.407401	46.20	ADR	33.8	0.00	-46.96	33.04	68.2	-35.16	-	-	360	200	H
EHT80 (484+242T RU92)	6145	6+16	* 10.706062	56.69	PK-U	37.7	0.00	-45.09	49.30	-	-	74	-24.7	360	100	H
			* 10.716456	57.80	PK-U	37.7	0.00	-45.06	50.44	-	-	74	-23.56	360	201	V
			* 10.732898	45.23	ADR	37.7	0.00	-45.47	37.46	54	-16.54	-	-	360	100	H
			* 10.735709	45.22	ADR	37.7	0.00	-45.52	37.40	54	-16.6	-	-	360	201	V
			* 15.484400	43.90	ADR	40.1	0.00	-43.54	40.46	54	-13.54	-	-	360	200	V
			* 15.489118	55.56	PK-U	40.1	0.00	-43.62	52.04	-	-	74	-21.96	360	200	V
			* 15.490850	43.89	ADR	40.1	0.00	-43.61	40.38	54	-13.62	-	-	360	100	H
			* 15.501468	56.31	PK-U	40.1	0.00	-43.53	52.88	-	-	74	-21.12	360	100	H
			* 3.348284	42.81	PK-U	32.9	0.00	-25.65	50.06	-	-	74	-23.94	360	100	H
			* 3.350324	42.85	PK-U	32.9	0.00	-25.64	50.11	-	-	74	-23.89	360	201	V
			3.343687	30.97	ADR	32.9	0.00	-25.59	38.28	68.2	-29.92	-	-	360	201	V
			3.360866	30.90	ADR	32.9	0.00	-25.59	38.21	68.2	-29.99	-	-	360	100	H
EHT80 (484+242T RU93)	5985	6+16	* 15.955088	43.65	ADR	40.5	0.00	-43.14	41.01	54	-12.99	-	-	360	200	V
			* 15.956641	43.71	ADR	40.5	0.00	-43.13	41.08	54	-12.92	-	-	360	100	H
			* 15.962954	55.95	PK-U	40.5	0.00	-43.06	53.39	-	-	74	-20.61	360	100	H
			* 15.977673	55.22	PK-U	40.5	0.00	-42.96	52.76	-	-	74	-21.24	360	200	V
			* 2.731292	31.54	ADR	32.5	0.00	-26.00	38.04	54	-15.96	-	-	360	100	H
			* 2.731664	31.59	ADR	32.5	0.00	-26.01	38.08	54	-15.92	-	-	360	201	V
			* 2.745357	43.21	PK-U	32.4	0.00	-26.03	49.58	-	-	74	-24.42	360	100	H
			* 2.759602	43.49	PK-U	32.4	0.00	-25.99	49.90	-	-	74	-24.1	360	201	V
			10.396165	45.25	ADR	37.7	0.00	-45.62	47.33	68.2	-30.87	-	-	360	201	V
			10.400118	57.13	PK-U	37.7	0.00	-45.60	39.23	-	-	88.2	-38.97	360	201	V
			10.41354	57.07	PK-U	37.7	0.00	-45.68	49.09	-	-	88.2	-39.11	360	100	H
			10.414049	45.31	ADR	37.7	0.00	-45.64	37.37	68.2	-30.83	-	-	360	100	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

160MHz

UNII-5 (MIMO CDD)	Channel Frequency MHz	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbt/ Filtr/Pad	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity	
EHT160 (SU Mode)	6025	6+16	* 1.319404	46.46	ADR	29.0	0.00	-46.30	29.16	54	-24.84	-	-	360	101	V	
			* 1.322968	58.30	PK-U	28.8	0.00	-46.30	40.80	-	-	74	-33.2	360	101	H	
			* 1.324608	58.04	PK-U	28.8	0.00	-46.30	40.54	-	-	74	-33.46	360	101	V	
			* 1.324683	46.44	ADR	28.8	0.00	-46.30	28.94	54	-25.06	-	-	360	101	H	
			* 12.033690	46.04	PK-U	38.7	0.00	-34.40	50.34	-	-	74	-23.66	360	101	H	
			* 12.039721	46.32	PK-U	38.7	0.00	-34.40	50.62	-	-	74	-23.38	360	200	V	
			* 12.058852	34.46	ADR	38.7	0.00	-33.90	39.26	54	-14.74	-	-	360	101	H	
			* 12.060003	34.70	ADR	38.7	0.00	-33.90	39.50	54	-14.5	-	-	360	200	V	
			* 4.598599	51.84	PK-U	34.1	0.00	-41.00	44.94	-	-	74	-29.06	360	199	H	
			* 4.602487	39.92	ADR	34.1	0.00	-41.00	33.02	54	-20.98	-	-	360	101	V	
	* 4.603158	52.02	PK-U	34.1	0.00	-41.00	45.12	-	-	74	-28.88	360	101	V			
	* 4.610766	40.14	ADR	34.1	0.00	-40.90	33.34	54	-20.66	-	-	360	199	H			
	6185	6+16	* 12.341505	33.80	ADR	38.9	0.00	-34.20	38.50	54	-15.5	-	-	360	100	H	
			* 12.341962	45.40	PK-U	38.9	0.00	-34.20	50.10	-	-	74	-23.9	360	100	H	
			* 12.342224	45.56	PK-U	38.9	0.00	-34.20	50.26	-	-	74	-23.74	360	100	H	
			* 12.359676	33.94	ADR	38.9	0.00	-34.20	38.64	54	-15.36	-	-	360	100	H	
			* 12.366205	45.66	PK-U	38.9	0.00	-34.40	50.16	-	-	74	-23.84	360	200	V	
			* 12.393971	33.92	ADR	38.8	0.00	-34.40	38.32	54	-15.68	-	-	360	200	V	
			* 2.676488	42.68	ADR	32.3	0.00	-43.50	31.48	68.2	-36.72	-	-	360	200	H	
			* 2.678430	42.62	ADR	32.3	0.00	-43.50	31.42	68.2	-36.78	-	-	360	200	V	
			* 2.685371	54.36	PK-U	32.3	0.00	-43.50	43.16	-	-	88.2	-45.04	360	200	V	
			* 2.692477	54.38	PK-U	32.2	0.00	-43.50	43.08	-	-	74	-30.92	360	200	H	
			4.493223	51.56	PK-U	33.8	0.00	-41.00	44.36	-	-	88.2	-43.84	360	100	H	
			4.494774	51.86	PK-U	33.8	0.00	-41.00	44.66	-	-	88.2	-43.54	360	200	V	
			4.496818	39.99	ADR	33.8	0.00	-41.00	32.79	68.2	-35.41	-	-	360	100	H	
			4.499289	40.14	ADR	33.8	0.00	-41.00	32.94	68.2	-35.26	-	-	360	200	V	
			* 1.532640	57.61	PK-U	28.0	0.00	-45.90	39.71	-	-	74	-34.29	360	199	V	
			* 1.539666	45.27	ADR	28.0	0.00	-45.80	27.47	54	-26.53	-	-	360	199	V	
			* 1.541648	45.16	ADR	27.9	0.00	-45.80	27.26	54	-26.74	-	-	360	199	H	
			* 1.542528	56.83	PK-U	27.9	0.00	-45.90	38.83	-	-	74	-35.17	360	199	H	
			* 12.635195	35.15	ADR	39.1	0.00	-34.30	39.95	54	-14.05	-	-	360	200	V	
			* 12.641034	47.11	PK-U	39.1	0.00	-34.20	52.01	-	-	74	-21.99	360	100	H	
	* 12.649842	34.95	ADR	39.1	0.00	-34.00	40.05	54	-13.95	-	-	360	100	H			
	* 12.658614	47.14	PK-U	39.1	0.00	-33.90	52.34	-	-	74	-21.66	360	200	V			
	* 3.794359	40.83	ADR	33.4	0.00	-41.90	32.33	54	-21.67	-	-	360	199	H			
	* 3.802482	52.30	PK-U	33.5	0.00	-41.80	44.00	-	-	74	-30	360	199	H			
	* 3.810708	40.99	ADR	33.5	0.00	-41.80	32.69	54	-21.31	-	-	360	199	V			
	* 3.811797	52.81	PK-U	33.5	0.00	-41.80	44.51	-	-	74	-29.49	360	199	V			
	EHT160 (996+484T RU95)	6025	6+16	* 11.858979	43.17	ADR	38.7	0.00	-41.66	40.21	54	-13.79	-	-	0	101	H
				* 11.861647	54.63	PK-U	38.7	0.00	-41.54	51.79	-	-	74	-22.21	0	101	H
				* 11.866702	43.20	ADR	38.7	0.00	-41.56	40.34	54	-13.66	-	-	0	101	V
				* 11.87087	55.32	PK-U	38.7	0.00	-41.52	52.50	-	-	74	-21.5	0	101	V
				* 2.756416	58.61	PK-U	32.4	0.00	-48.29	42.72	-	-	74	-31.28	0	199	V
				* 2.774521	46.85	ADR	32.3	0.00	-48.10	31.05	54	-22.95	-	-	0	199	V
				* 2.781425	46.79	ADR	32.3	0.00	-48.07	31.02	54	-22.98	-	-	0	101	H
				* 2.788776	58.71	PK-U	32.3	0.00	-48.05	42.96	-	-	74	-31.04	0	101	H
				9.554610	57.20	PK-U	36.8	0.00	-45.49	48.51	-	-	88.2	-39.69	0	101	V
				9.559050	45.56	ADR	36.8	0.00	-45.67	36.69	68.2	-31.51	-	-	0	101	V
	6185	6+16	9.562081	45.47	ADR	36.8	0.00	-45.52	36.75	68.2	-31.45	-	-	0	101	H	
			9.564629	57.06	PK-U	36.8	0.00	-45.49	48.37	-	-	88.2	-39.83	0	101	H	
* 10.953661			56.30	PK-U	37.8	0.00	-43.50	50.60	-	-	74	-23.4	0	101	V		
* 10.957556			44.11	ADR	37.8	0.00	-43.52	38.39	54	-15.61	-	-	0	199	H		
* 10.968099			44.11	ADR	37.8	0.00	-43.24	38.67	54	-15.33	-	-	0	101	V		
* 10.975386			56.21	PK-U	37.9	0.00	-42.79	51.32	-	-	74	-22.68	0	199	H		
* 11.831277			43.25	ADR	38.7	0.00	-42.46	39.49	54	-14.51	-	-	0	199	H		
* 11.84324			43.49	ADR	38.7	0.00	-42.37	39.82	54	-14.18	-	-	0	101	V		
* 11.853231			54.67	PK-U	38.7	0.00	-41.88	51.49	-	-	74	-22.51	0	101	V		
* 11.860538			54.87	PK-U	38.7	0.00	-41.61	51.96	-	-	74	-22.04	0	199	H		
EHT160 (996+484T S94)	6345	6+16	* 2.344598	59.69	PK-U	31.9	0.00	-49.16	42.43	-	-	74	-31.57	0	101	H	
			* 2.345281	59.18	PK-U	31.9	0.00	-49.14	41.94	-	-	74	-32.06	0	101	V	
			* 2.347778	47.99	ADR	31.9	0.00	-49.15	30.74	54	-23.26	-	-	0	101	V	
			* 2.365395	47.80	ADR	32.0	0.00	-49.10	30.70	54	-23.3	-	-	0	101	H	
			* 11.068262	55.57	PK-U	37.9	0.00	-42.22	51.25	-	-	74	-22.75	1	199	H	
			* 11.070562	43.72	ADR	37.9	0.00	-42.29	39.33	54	-14.67	-	-	1	199	H	
			* 11.046048	55.76	PK-U	37.9	0.00	-41.86	51.80	-	-	74	-22.2	1	101	V	
			* 11.061183	43.75	ADR	37.9	0.00	-41.92	39.73	54	-14.27	-	-	1	101	V	
			2.629273	59.16	PK-U	32.4	0.00	-48.73	42.83	-	-	88.2	-45.37	1	199	H	
			2.638725	47.75	ADR	32.4	0.00	-48.74	31.41	68.2	-36.79	-	-	1	199	H	



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

WORST-CASE HARMONICS AND SPURIOUS EMISSIONS

802.11be EHT20 / 1 & 5955 / 2TX / CDD / 52+26T / RU70

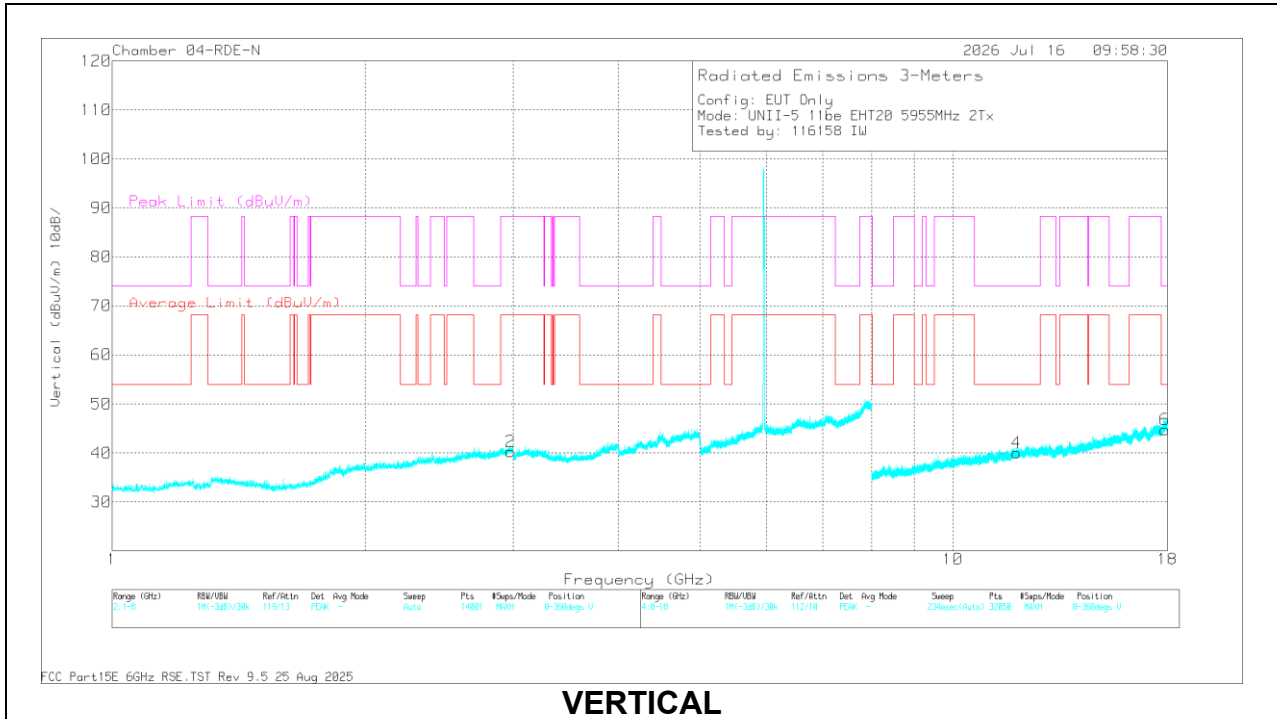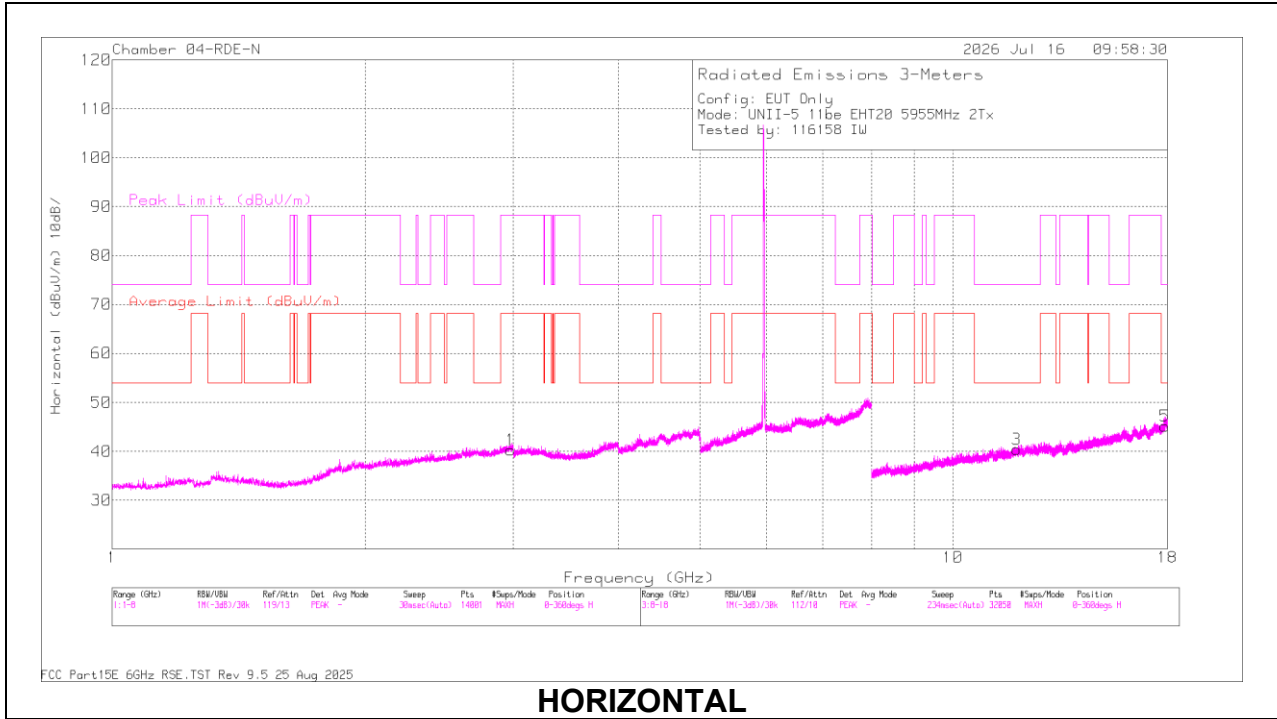

RADIATED EMISSIONS

Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbt/ Filt/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 11.919525	55.86	PK-U	38.8	0.00	-44.04	50.62	-	-	74	-23.38	0	100	H
* 11.917296	44.11	ADR	38.8	0.00	-44.05	38.86	54	-15.14	-	-	0	100	H
* 17.864833	55.62	PK-U	41.2	0.00	-41.39	55.43	-	-	74	-18.57	0	100	H
* 17.847412	43.90	ADR	41.2	0.00	-41.10	44.00	54	-10	-	-	0	100	H
* 11.894677	55.43	PK-U	38.7	0.00	-44.19	49.94	-	-	74	-24.06	0	201	V
* 11.89553	44.00	ADR	38.7	0.00	-44.16	38.54	54	-15.46	-	-	0	201	V
* 17.849956	56.08	PK-U	41.2	0.00	-41.19	56.09	-	-	74	-17.91	0	200	V
* 17.866615	43.80	ADR	41.2	0.00	-41.36	43.64	54	-10.36	-	-	0	200	V
2.958813	43.62	PK-U	32.7	0.00	-25.79	50.53	-	-	88.2	-37.67	0	201	V
2.962721	43.09	PK-U	32.7	0.00	-25.80	49.99	-	-	88.2	-38.21	0	100	H
2.982863	31.54	ADR	32.8	0.00	-25.72	38.62	68.2	-29.58	-	-	0	100	H
2.996067	31.45	ADR	32.8	0.00	-25.71	38.54	68.2	-29.66	-	-	0	201	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.1.6. 802.11be MIMO MODE IN UNII-6 BAND – SPURIOUS EMISSIONS

20MHz

UNII-6 (MIMO CDD)	Channel Frequency MHz	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbt/ Filt/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (SU Mode)	6435	6+16	* 1.504513	59.01	PK-U	27.9	0.00	-47.41	39.50	-	-	74	-34.5	0	101	V
			* 1.512385	47.29	ADR	27.8	0.00	-47.35	27.74	54	-26.26	-	-	0	199	H
			* 1.514214	47.19	ADR	27.8	0.00	-47.33	27.66	54	-26.34	-	-	0	101	V
			* 1.524877	67.23	PK-U	27.8	0.00	-47.29	47.74	-	-	74	-26.26	0	199	H
			* 13.365108	53.49	PK-U	39.2	0.00	-41.57	51.12	-	-	74	-22.88	0	101	V
			* 13.365532	53.36	PK-U	39.2	0.00	-41.60	50.96	-	-	74	-23.04	0	200	H
			* 13.384986	41.63	ADR	39.2	0.00	-41.87	38.96	54	-15.04	-	-	0	200	H
			* 13.391870	42.07	ADR	39.2	0.00	-41.85	39.42	54	-14.58	-	-	0	101	V
			* 2.369983	46.49	ADR	32.2	0.00	-47.51	31.18	54	-22.82	-	-	0	101	V
			* 2.372165	58.04	PK-U	32.2	0.00	-47.49	42.75	-	-	74	-31.25	0	101	V
			* 2.372547	46.52	ADR	32.2	0.00	-47.48	31.24	54	-22.76	-	-	0	101	H
			* 2.382861	57.97	PK-U	32.3	0.00	-47.42	42.85	-	-	74	-31.15	0	101	H
			2.019863	47.43	ADR	31.6	0.00	-47.68	31.35	68.2	-36.85	-	-	1	200	H
			2.025337	59.05	PK-U	31.6	0.00	-47.67	42.98	-	-	88.2	-45.22	1	200	H
			2.025476	47.51	ADR	31.6	0.00	-47.67	31.44	68.2	-36.76	-	-	1	200	V
	6475	6+16	2.027956	59.49	PK-U	31.6	0.00	-47.67	43.42	-	-	88.2	-44.78	1	200	V
			3.013566	55.90	PK-U	32.9	0.00	-45.57	43.23	-	-	88.2	-44.97	1	200	V
			3.024288	44.23	ADR	32.9	0.00	-45.54	31.59	68.2	-36.61	-	-	1	101	H
			3.033714	55.79	PK-U	32.9	0.00	-45.53	43.16	-	-	88.2	-45.04	1	101	H
			3.038350	44.26	ADR	33.0	0.00	-45.61	31.65	68.2	-36.55	-	-	1	200	V
			10.148841	43.20	ADR	37.2	0.00	-43.11	37.29	68.2	-30.91	-	-	1	101	V
			10.154569	43.00	ADR	37.2	0.00	-43.10	37.10	68.2	-31.1	-	-	1	101	H
			10.162776	54.68	PK-U	37.2	0.00	-42.82	49.06	-	-	88.2	-39.14	1	101	V
			10.165407	55.11	PK-U	37.2	0.00	-42.84	49.47	-	-	88.2	-38.73	1	101	H
			1.972075	59.07	PK-U	31.8	0.00	-47.44	43.43	-	-	88.2	-44.77	0	101	V
			1.974222	46.88	ADR	31.8	0.00	-47.47	31.21	68.2	-36.99	-	-	0	101	V
			2.012944	58.44	PK-U	31.6	0.00	-47.69	42.35	-	-	88.2	-45.85	0	200	H
			2.014508	47.26	ADR	31.6	0.00	-47.69	31.17	68.2	-37.03	-	-	0	200	H
			3.016659	55.98	PK-U	32.9	0.00	-45.52	43.36	-	-	88.2	-44.84	0	101	V
			3.025040	55.81	PK-U	32.9	0.00	-45.57	43.14	-	-	88.2	-45.06	0	200	H
EHT20 (26T RU0)	6435	6+16	3.026653	44.31	ADR	32.9	0.00	-45.57	31.64	68.2	-36.56	-	-	0	101	V
			3.028293	44.17	ADR	32.9	0.00	-45.56	31.51	68.2	-36.69	-	-	0	200	H
			9.940932	42.74	ADR	37.0	0.00	-42.79	36.95	68.2	-31.25	-	-	0	101	H
			9.961554	42.84	ADR	37.0	0.00	-42.85	36.99	68.2	-31.21	-	-	0	101	V
			9.962090	54.56	PK-U	37.0	0.00	-42.86	48.70	-	-	88.2	-39.5	0	101	V
			9.972137	54.62	PK-U	37.0	0.00	-42.89	48.73	-	-	88.2	-39.47	0	101	H
			* 1.512937	47.13	ADR	27.8	0.00	-47.35	27.58	54	-26.42	-	-	0	101	V
			* 1.513483	47.24	ADR	27.8	0.00	-47.34	27.70	54	-26.3	-	-	0	101	H
			* 1.513746	59.13	PK-U	27.8	0.00	-47.34	39.59	-	-	74	-34.41	0	101	V
			* 1.515856	59.32	PK-U	27.8	0.00	-47.34	39.78	-	-	74	-34.22	0	101	H
			* 13.312583	53.69	PK-U	39.2	0.00	-41.53	51.36	-	-	74	-22.64	0	101	V
			* 13.338677	53.29	PK-U	39.2	0.00	-41.40	51.09	-	-	74	-22.91	0	101	H
			* 13.339044	42.05	ADR	39.2	0.00	-41.42	39.83	54	-14.17	-	-	0	101	V
			* 13.347524	41.97	ADR	39.2	0.00	-41.28	39.89	54	-14.11	-	-	0	101	H
			* 2.360273	46.47	ADR	32.2	0.00	-47.49	31.18	54	-22.82	-	-	0	101	H
			* 2.367757	58.30	PK-U	32.2	0.00	-47.50	43.00	-	-	74	-31	0	101	H
			* 2.370054	46.47	ADR	32.2	0.00	-47.51	31.16	54	-22.84	-	-	0	101	V
	6475	6+16	* 2.380972	58.11	PK-U	32.3	0.00	-47.43	42.98	-	-	74	-31.02	0	101	V
			1.965498	58.50	PK-U	31.7	0.00	-47.37	42.83	-	-	88.2	-45.37	0	199	H
			1.968425	58.95	PK-U	31.8	0.00	-47.40	43.35	-	-	88.2	-44.85	0	101	V
			1.969598	47.00	ADR	31.8	0.00	-47.42	31.38	68.2	-36.82	-	-	0	101	V
			1.974021	47.09	ADR	31.8	0.00	-47.46	31.43	68.2	-36.77	-	-	0	199	H
			3.000685	56.37	PK-U	32.8	0.00	-45.66	43.51	-	-	88.2	-44.69	0	199	H
			3.027393	44.25	ADR	32.9	0.00	-45.58	31.57	68.2	-36.63	-	-	0	200	V
			3.028429	55.91	PK-U	32.9	0.00	-45.56	43.25	-	-	88.2	-44.95	0	200	V
			3.031055	44.25	ADR	32.9	0.00	-45.54	31.61	68.2	-36.59	-	-	0	199	H
			10.160697	42.98	ADR	37.2	0.00	-42.81	37.37	68.2	-30.83	-	-	0	101	V
			10.163485	43.12	ADR	37.2	0.00	-42.84	37.48	68.2	-30.72	-	-	0	200	H
			10.165744	55.04	PK-U	37.2	0.00	-42.85	49.39	-	-	88.2	-38.81	0	101	V
			10.169184	55.09	PK-U	37.2	0.00	-42.70	49.59	-	-	88.2	-38.61	0	200	H
	6515	6+16	1.970542	46.87	ADR	31.8	0.00	-47.43	31.24	68.2	-36.96	-	-	360	101	V
			1.971155	58.89	PK-U	31.8	0.00	-47.43	43.26	-	-	88.2	-44.94	360	200	H
			1.971204	58.77	PK-U	31.8	0.00	-47.43	43.14	-	-	88.2	-45.06	360	101	V
			1.976034	47.04	ADR	31.8	0.00	-47.50	31.34	68.2	-36.86	-	-	360	200	H
			3.068713	55.83	PK-U	33.0	0.00	-45.56	43.27	-	-	88.2	-44.93	360	200	H
			3.079343	44.16	ADR	33.0	0.00	-45.50	31.66	68.2	-36.54	-	-	360	200	H
			3.080851	56.00	PK-U	33.0	0.00	-45.50	43.50	-	-	88.2	-44.7	360	101	V
			3.082624	44.13	ADR	33.0	0.00	-45.52	31.61	68.2	-36.59	-	-	360	101	V
			10.266264	54.47	PK-U	37.4	0.00	-43.30	48.57	-	-	88.2	-39.63	360	199	H
			10.281926	54.77	PK-U	37.4	0.00	-43.23	48.94	-	-	88.2	-39.26	360	101	V
			10.283682	42.77	ADR	37.4	0.00	-43.22	36.95	68.2	-31.25	-	-	360	199	H
			10.291001	42.92	ADR	37.4	0.00	-43.00	37.32	68.2	-30.88	-	-	360	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

20MHz (cont.)

UNII-6 (MIMO CDD)	Channel Frequency MHz	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbt/ Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (52+26T RU70)	6435	6+16	2.127353	42.85	PK-U	31.5	0.00	-26.71	47.64	-	-	88.2	-40.56	0	201	V
			2.135826	31.28	ADR	31.5	0.00	-26.79	35.99	68.2	-32.21	-	-	0	100	H
			2.136841	42.98	PK-U	31.5	0.00	-26.81	47.67	-	-	88.2	-40.53	0	100	H
			2.164644	31.03	ADR	31.4	0.00	-26.75	35.68	68.2	-32.52	-	-	0	201	V
			3.203652	31.05	ADR	33.0	0.00	-25.55	38.50	68.2	-29.7	-	-	0	100	H
			3.208246	43.25	PK-U	33.0	0.00	-25.49	50.76	-	-	88.2	-37.44	0	200	V
			3.21484	42.72	PK-U	33.0	0.00	-25.59	50.13	-	-	88.2	-38.07	0	100	H
			3.220843	31.08	ADR	33.0	0.00	-25.59	38.49	68.2	-29.71	-	-	0	200	V
			12.86495	44.20	ADR	39.0	0.00	-44.06	39.14	68.2	-29.06	-	-	0	201	V
			12.868092	44.32	ADR	39.0	0.00	-44.00	39.32	68.2	-28.88	-	-	0	100	H
			12.870998	56.13	PK-U	39.0	0.00	-44.02	51.11	-	-	88.2	-37.09	0	100	H
			12.874722	56.71	PK-U	39.0	0.00	-43.95	51.76	-	-	88.2	-36.44	0	201	V
			12.142998	42.69	PK-U	31.5	0.00	-26.69	47.50	-	-	88.2	-40.7	360	201	V
EHT20 (52+26T RU71)	6475	6+16	2.144475	31.15	ADR	31.5	0.00	-26.67	35.98	68.2	-32.22	-	-	360	100	H
			2.147998	42.89	PK-U	31.5	0.00	-26.77	47.62	-	-	88.2	-40.58	360	100	H
			2.157357	31.14	ADR	31.5	0.00	-26.64	36.00	68.2	-32.2	-	-	360	201	V
			3.239957	31.01	ADR	33.0	0.00	-25.61	38.40	68.2	-29.8	-	-	360	100	H
			3.243151	42.67	PK-U	33.0	0.00	-25.65	50.02	-	-	88.2	-38.18	360	200	V
			3.248416	42.99	PK-U	33.0	0.00	-25.68	50.31	-	-	88.2	-37.89	360	100	H
			3.248596	31.00	ADR	33.0	0.00	-25.66	38.34	68.2	-29.86	-	-	360	200	V
			12.931983	56.26	PK-U	39.0	0.00	-43.80	51.46	-	-	88.2	-36.74	360	100	H
			12.937167	44.59	ADR	39.0	0.00	-43.79	39.80	68.2	-28.4	-	-	360	100	H
			12.938655	44.30	ADR	39.0	0.00	-43.78	39.52	68.2	-28.68	-	-	360	100	H
			12.949637	55.92	PK-U	38.9	0.00	-43.91	50.91	-	-	88.2	-37.29	360	100	H
			* 3.266645	42.81	PK-U	32.9	0.00	-25.62	50.09	-	-	74	-23.91	360	200	V
			2.165626	31.11	ADR	31.4	0.00	-26.75	35.76	68.2	-32.44	-	-	360	100	H
EHT20 (52+26T RU72)	6515	6+16	2.178371	31.36	ADR	31.4	0.00	-26.70	36.06	68.2	-32.14	-	-	360	201	V
			2.189562	43.20	PK-U	31.4	0.00	-26.58	48.02	-	-	88.2	-40.18	360	100	H
			2.190496	42.90	PK-U	31.4	0.00	-26.58	47.72	-	-	88.2	-40.48	360	201	V
			3.246264	43.34	PK-U	33.0	0.00	-25.66	50.68	-	-	88.2	-37.52	360	100	H
			3.246687	30.89	ADR	33.0	0.00	-25.66	38.23	68.2	-29.97	-	-	360	200	V
			3.257423	30.99	ADR	33.0	0.00	-25.66	38.33	68.2	-29.87	-	-	360	100	H
			13.012009	56.14	PK-U	38.9	0.00	-43.51	51.53	-	-	88.2	-36.67	360	201	V
			13.01944	44.47	ADR	38.9	0.00	-43.62	39.75	68.2	-28.45	-	-	360	201	V
			13.029116	44.37	ADR	38.9	0.00	-43.82	39.45	68.2	-28.75	-	-	360	100	H
			13.043096	56.44	PK-U	38.9	0.00	-43.93	51.41	-	-	88.2	-36.79	360	100	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

40MHz

UNII-6 (MIMO CDD)	Channel Frequency MHz	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbt/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT40 (SU Mode)	6445	6+16	* 1.695431	58.68	PK-U	29.1	0.00	-47.74	40.04	-	-	74	-33.96	360	101	H
			* 1.697351	47.39	ADR	29.1	0.00	-47.76	28.73	54	-25.27	-	-	360	101	H
			* 1.699886	46.92	ADR	29.2	0.00	-47.76	28.36	54	-25.64	-	-	360	200	V
			* 1.700482	58.66	PK-U	29.2	0.00	-47.76	40.10	-	-	74	-33.9	360	200	V
			* 13.385855	53.73	PK-U	39.2	0.00	-41.86	51.07	-	-	74	-22.93	360	200	H
			* 2.364682	46.54	ADR	32.2	0.00	-47.50	31.24	54	-22.76	-	-	360	101	H
			* 2.367068	58.29	PK-U	32.2	0.00	-47.49	43.00	-	-	74	-31	360	101	H
			* 2.373068	58.16	PK-U	32.2	0.00	-47.48	42.88	-	-	74	-31.12	360	200	V
			* 2.373108	46.61	ADR	32.2	0.00	-47.48	31.33	54	-22.67	-	-	360	200	V
			13.410413	41.87	ADR	39.1	0.00	-41.73	39.24	68.2	-28.96	-	-	360	200	H
			13.416743	41.83	ADR	39.1	0.00	-41.80	39.13	68.2	-29.07	-	-	360	200	V
			13.418755	53.71	PK-U	39.1	0.00	-41.73	51.08	-	-	88.2	-37.12	360	200	V
			* 1.696067	58.62	PK-U	29.1	0.00	-47.75	39.97	-	-	74	-34.03	360	199	H
			* 1.698729	47.01	ADR	29.2	0.00	-47.76	28.45	54	-25.55	-	-	360	199	H
			* 1.702951	47.00	ADR	29.2	0.00	-47.76	28.44	54	-25.56	-	-	360	200	V
	6485	6+16	* 1.705950	58.61	PK-U	29.3	0.00	-47.73	40.18	-	-	74	-33.82	360	200	V
			* 13.370196	53.95	PK-U	39.2	0.00	-41.67	51.48	-	-	74	-22.52	360	101	H
			* 13.370396	41.91	ADR	39.2	0.00	-41.67	39.44	54	-14.56	-	-	360	101	H
			* 13.391938	53.53	PK-U	39.2	0.00	-41.85	50.88	-	-	74	-23.12	360	200	V
			* 13.395065	41.83	ADR	39.1	0.00	-41.83	39.10	54	-14.9	-	-	360	200	V
			* 2.740542	57.22	PK-U	32.4	0.00	-46.52	43.10	-	-	74	-30.9	360	101	V
			* 2.748160	57.32	PK-U	32.4	0.00	-46.50	43.22	-	-	74	-30.78	360	101	H
			* 2.750941	45.42	ADR	32.4	0.00	-46.51	31.31	54	-22.69	-	-	360	101	V
			* 2.753778	45.37	ADR	32.4	0.00	-46.50	31.27	54	-22.73	-	-	360	101	H
			* 1.697974	47.02	ADR	29.1	0.00	-47.77	28.35	54	-25.65	-	-	360	200	V
			* 1.700284	46.97	ADR	29.2	0.00	-47.76	28.41	54	-25.59	-	-	360	101	H
			* 1.703355	58.56	PK-U	29.2	0.00	-47.76	40.00	-	-	74	-34	360	101	H
			* 1.704071	59.55	PK-U	29.2	0.00	-47.75	41.00	-	-	74	-33	360	200	V
			* 2.793778	56.84	PK-U	32.2	0.00	-46.41	42.63	-	-	74	-31.37	360	101	H
	6525	6+16	* 2.804104	45.29	ADR	32.1	0.00	-46.39	31.00	54	-23	-	-	360	101	V
			* 2.808597	56.89	PK-U	32.1	0.00	-46.42	42.57	-	-	74	-31.43	360	101	V
			* 2.812292	45.32	ADR	32.1	0.00	-46.45	30.97	54	-23.03	-	-	360	101	H
			13.428112	41.85	ADR	39.1	0.00	-41.80	39.15	68.2	-29.05	-	-	360	200	V
			13.431404	54.08	PK-U	39.1	0.00	-41.80	51.38	-	-	88.2	-36.82	360	200	V
			13.434499	54.10	PK-U	39.1	0.00	-41.84	51.36	-	-	88.2	-36.84	360	101	H
			13.436835	42.07	ADR	39.1	0.00	-41.85	39.32	68.2	-28.88	-	-	360	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

80MHz

UNII-6 (MIMO CDD)	Channel Frequency MHz	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbt/ Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT80 (SU Mode)	6465	6+16	* 1.318604	46.55	ADR	29.0	0.00	-46.30	29.25	54	-24.75	-	-	360	200	H
			* 1.323799	58.78	PK-U	28.8	0.00	-46.30	41.28	-	-	74	-32.72	360	200	H
			* 1.324039	46.46	ADR	28.8	0.00	-46.30	28.96	54	-25.04	-	-	350	200	V
			* 1.325790	58.10	PK-U	28.8	0.00	-46.30	40.60	-	-	74	-33.4	350	200	V
			* 11.981458	46.55	PK-U	38.7	0.00	-34.30	50.95	-	-	74	-23.05	350	200	H
			* 11.997869	34.95	ADR	38.6	0.00	-33.90	39.65	54	-14.35	-	-	350	200	H
			* 12.003060	34.89	ADR	38.6	0.00	-33.90	39.59	54	-14.41	-	-	350	200	V
			* 12.007713	47.19	PK-U	38.7	0.00	-34.00	51.89	-	-	74	-22.11	350	200	V
			* 3.796532	40.69	ADR	33.5	0.00	-41.90	32.29	54	-21.71	-	-	350	200	H
			* 3.800998	40.58	ADR	33.5	0.00	-41.90	32.18	54	-21.82	-	-	350	200	V
			* 3.801932	52.24	PK-U	33.5	0.00	-41.80	43.94	-	-	74	-30.06	350	200	H
			* 3.811495	52.23	PK-U	33.5	0.00	-41.80	43.93	-	-	74	-30.07	350	200	V
			* 11.312651	55.49	PK-U	38.2	0.00	-42.30	51.39	-	-	74	-22.61	1	198	H
EHT80 (484+242T RU93)	6465	6+16	* 11.332125	43.78	ADR	38.2	0.00	-42.35	39.63	54	-14.37	-	-	1	198	H
			* 11.324882	55.50	PK-U	38.2	0.00	-42.24	51.46	-	-	74	-22.54	1	200	V
			* 11.319506	43.79	ADR	38.2	0.00	-42.29	39.70	54	-14.3	-	-	1	200	V
			2.045842	59.73	PK-U	31.2	0.00	-48.86	42.07	-	-	88.2	-46.13	1	101	V
			2.046630	59.67	PK-U	31.2	0.00	-48.84	42.03	-	-	88.2	-46.17	1	101	H
			2.048962	48.24	ADR	31.2	0.00	-48.85	30.59	68.2	-37.61	-	-	1	101	V
			2.050510	48.34	ADR	31.2	0.00	-48.80	30.74	68.2	-37.46	-	-	1	101	H
			14.257688	44.31	ADR	39.6	0.00	-42.84	41.07	68.2	-27.13	-	-	1	101	V
			14.279374	55.89	PK-U	39.6	0.00	-42.46	53.03	-	-	88.2	-35.17	1	101	V
			14.284149	55.98	PK-U	39.6	0.00	-42.41	53.17	-	-	88.2	-35.03	1	198	H
			14.293013	44.49	ADR	39.6	0.00	-42.74	41.35	68.2	-26.85	-	-	1	198	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

160MHz

UNII-6 (MIMO CDD)	Channel Frequency MHz	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbt/ Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT160 (SU Mode)	6505	6+16	* 3.808972	52.47	PK-U	33.5	0.00	-41.80	44.17	-	-	74	-29.83	360	100	H
			* 3.803443	40.82	ADR	33.5	0.00	-41.80	32.52	54	-21.48	-	-	360	100	H
			* 3.802088	52.43	PK-U	33.5	0.00	-41.80	44.13	-	-	74	-29.87	360	200	V
			* 3.798941	40.91	ADR	33.5	0.00	-41.90	32.51	54	-21.49	-	-	360	200	V
			1.938764	45.14	ADR	30.6	0.00	-45.30	30.44	68.2	-37.76	-	-	360	200	H
			1.944470	44.85	ADR	30.5	0.00	-45.30	30.05	68.2	-38.15	-	-	360	100	V
			1.947012	56.70	PK-U	30.6	0.00	-45.40	41.90	-	-	88.2	-46.3	360	200	H
			1.949803	56.47	PK-U	30.6	0.00	-45.40	41.67	-	-	88.2	-46.53	360	100	V
			12.996965	33.92	ADR	39.2	0.00	-34.10	39.02	68.2	-29.18	-	-	360	200	H
			12.998076	46.31	PK-U	39.2	0.00	-34.00	51.51	-	-	88.2	-36.69	360	200	H
			13.012084	45.31	PK-U	39.2	0.00	-33.80	50.71	-	-	88.2	-37.49	360	100	V
			13.014834	33.72	ADR	39.2	0.00	-33.90	39.02	68.2	-29.18	-	-	360	100	V
EHT160 (996+484T RU95)	6505	6+16	2.182827	59.62	PK-U	31.3	0.00	-49.06	41.86	-	-	88.2	-46.34	360	101	H
			2.185582	47.82	ADR	31.3	0.00	-49.09	30.03	68.2	-38.17	-	-	360	101	H
			2.189284	47.97	ADR	31.3	0.00	-49.13	30.14	68.2	-38.06	-	-	360	101	V
			2.190088	59.65	PK-U	31.3	0.00	-49.14	41.81	-	-	88.2	-46.39	360	101	V
			4.424406	58.58	PK-U	33.8	0.00	-47.09	45.29	-	-	88.2	-42.91	360	101	V
			4.445318	57.87	PK-U	33.8	0.00	-47.05	44.62	-	-	88.2	-43.58	360	101	H
			4.447012	46.39	ADR	33.8	0.00	-47.10	33.09	68.2	-35.11	-	-	360	101	V
			4.454570	46.33	ADR	33.8	0.00	-47.13	33.00	68.2	-35.2	-	-	360	101	H
			9.677661	57.14	PK-U	37.0	0.00	-44.92	49.22	-	-	88.2	-38.98	360	101	V
			9.680180	45.36	ADR	37.0	0.00	-44.99	37.37	68.2	-30.83	-	-	360	101	V
			9.680656	45.33	ADR	37.0	0.00	-44.96	37.37	68.2	-30.83	-	-	360	101	H
			9.703650	57.34	PK-U	37.0	0.00	-44.61	49.73	-	-	88.2	-38.47	360	101	H



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

WORST-CASE HARMONICS AND SPURIOUS EMISSIONS

802.11be EHT20 / 97 & 6435 / 2TX / CDD / 26T / RU0

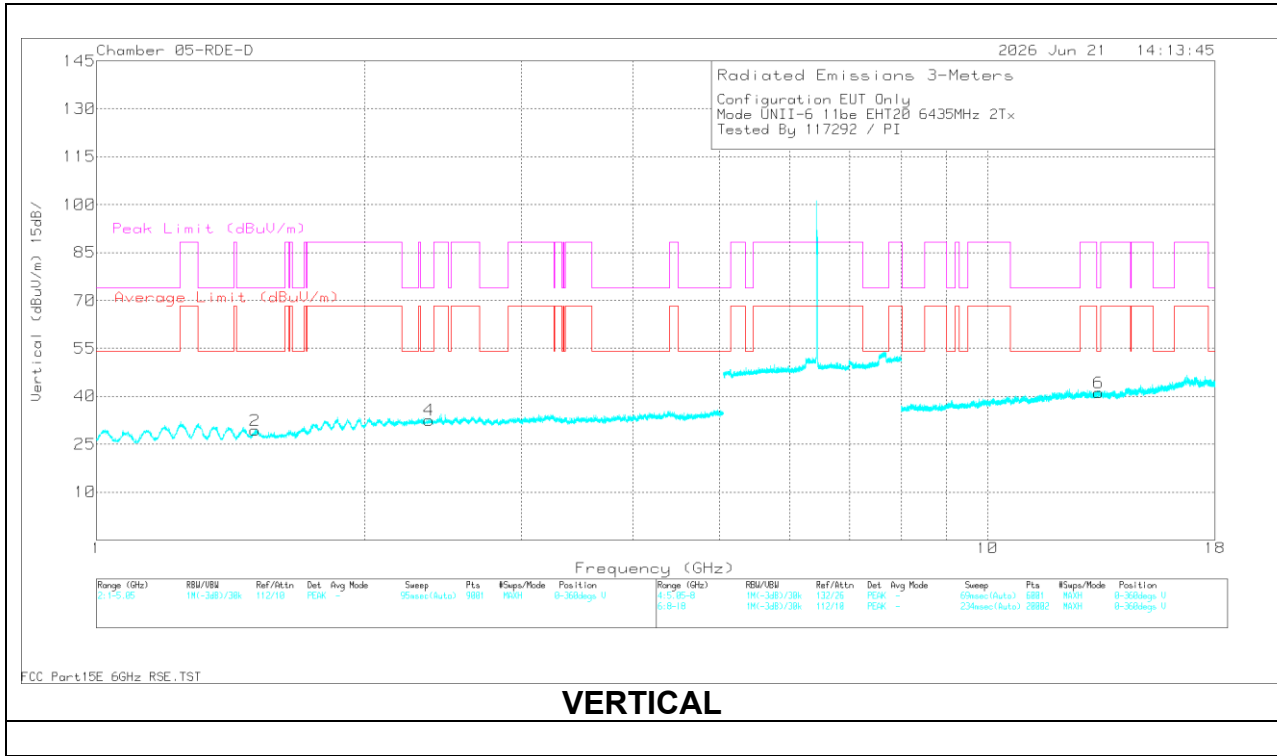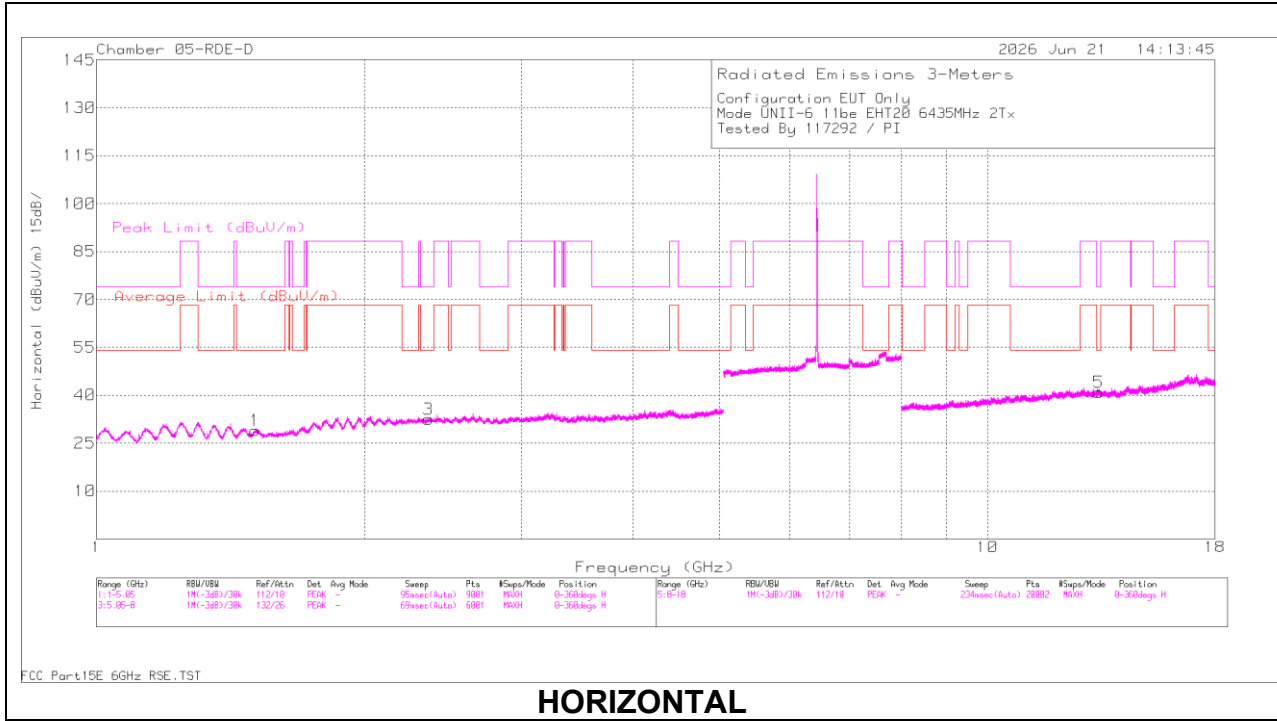

RADIATED EMISSIONS

Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbt/ Filt/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 1.512937	47.13	ADR	27.8	0.00	-47.35	27.58	54	-26.42	-	-	0	101	V
* 1.513483	47.24	ADR	27.8	0.00	-47.34	27.70	54	-26.3	-	-	0	101	H
* 1.513746	59.13	PK-U	27.8	0.00	-47.34	39.59	-	-	74	-34.41	0	101	V
* 1.515856	59.32	PK-U	27.8	0.00	-47.34	39.78	-	-	74	-34.22	0	101	H
* 13.312583	53.69	PK-U	39.2	0.00	-41.53	51.36	-	-	74	-22.64	0	101	V
* 13.338677	53.29	PK-U	39.2	0.00	-41.40	51.09	-	-	74	-22.91	0	101	H
* 13.339044	42.05	ADR	39.2	0.00	-41.42	39.83	54	-14.17	-	-	0	101	V
* 13.347524	41.97	ADR	39.2	0.00	-41.28	39.89	54	-14.11	-	-	0	101	H
* 2.360273	46.47	ADR	32.2	0.00	-47.49	31.18	54	-22.82	-	-	0	101	H
* 2.367757	58.30	PK-U	32.2	0.00	-47.50	43.00	-	-	74	-31	0	101	H
* 2.370054	46.47	ADR	32.2	0.00	-47.51	31.16	54	-22.84	-	-	0	101	V
* 2.380972	58.11	PK-U	32.3	0.00	-47.43	42.98	-	-	74	-31.02	0	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.1.7. 802.11be MIMO MODE IN UNII-7 BAND – SPURIOUS EMISSIONS

20MHz

UNII-7 (MIMO CDD)	Channel Frequency MHz	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbt/ Filt/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (SU Mode)	6535	6+16	1.970092	46.88	ADR	31.8	0.00	-47.42	31.26	68.2	-36.94	-	-	0	199	V
			1.970297	46.89	ADR	31.8	0.00	-47.42	31.27	68.2	-36.93	-	-	0	101	H
			1.970523	58.19	PK-U	31.8	0.00	-47.43	42.56	-	-	88.2	-45.64	0	199	V
			1.976545	58.68	PK-U	31.8	0.00	-47.51	42.97	-	-	88.2	-45.23	0	101	H
			3.033307	44.07	ADR	32.9	0.00	-45.53	31.44	68.2	-36.76	-	-	0	101	H
			3.035075	44.07	ADR	32.9	0.00	-45.56	31.41	68.2	-36.79	-	-	0	199	V
			3.062006	55.87	PK-U	33.0	0.00	-45.56	43.31	-	-	88.2	-44.89	0	101	H
			3.063912	55.67	PK-U	33.0	0.00	-45.55	43.12	-	-	88.2	-45.08	0	199	V
			10.161384	54.60	PK-U	37.2	0.00	-42.81	48.99	-	-	88.2	-39.21	0	101	V
			10.161736	43.23	ADR	37.2	0.00	-42.81	37.62	68.2	-30.58	-	-	0	101	H
			10.172639	42.98	ADR	37.2	0.00	-42.51	37.67	68.2	-30.53	-	-	0	101	V
			10.178190	54.79	PK-U	37.2	0.00	-42.61	49.38	-	-	88.2	-38.82	0	101	H
	6715	6+16	* 1.527287	46.52	ADR	27.8	0.00	-47.30	27.02	54	-26.98	-	-	360	101	V
			* 1.527878	58.50	PK-U	27.8	0.00	-47.31	38.99	-	-	74	-35.01	360	101	V
			* 1.528680	46.50	ADR	27.8	0.00	-47.31	26.99	54	-27.01	-	-	360	101	H
			* 1.567996	57.87	PK-U	27.8	0.00	-47.31	38.36	-	-	74	-35.64	360	101	H
			* 14.486072	55.50	PK-U	39.5	0.00	-42.56	52.44	-	-	74	-21.56	360	200	H
			* 2.365923	46.42	ADR	32.2	0.00	-47.49	31.13	54	-22.87	-	-	360	101	H
			* 2.367490	58.23	PK-U	32.2	0.00	-47.49	42.94	-	-	74	-31.06	360	200	V
			* 2.368247	58.80	PK-U	32.2	0.00	-47.50	43.50	-	-	74	-30.5	360	101	H
			* 2.370081	46.39	ADR	32.2	0.00	-47.51	31.08	54	-22.92	-	-	360	200	V
			14.507062	43.35	ADR	39.5	0.00	-43.00	39.85	68.2	-28.35	-	-	360	101	V
			14.509834	55.39	PK-U	39.5	0.00	-42.98	51.91	-	-	88.2	-36.29	360	101	V
			14.515025	43.52	ADR	39.5	0.00	-43.01	40.01	68.2	-28.19	-	-	360	200	H
	6875	6+16	* 1.596647	58.43	PK-U	27.9	0.00	-47.35	38.98	-	-	74	-35.02	360	101	V
			* 1.617577	57.98	PK-U	28.1	0.00	-47.51	38.57	-	-	74	-35.43	360	101	H
			* 1.623367	46.07	ADR	28.1	0.00	-47.58	26.59	54	-27.41	-	-	360	101	H
			* 14.482355	54.54	PK-U	39.5	0.00	-42.47	51.57	-	-	74	-22.43	360	199	H
			* 14.483823	55.05	PK-U	39.5	0.00	-42.49	52.06	-	-	74	-21.94	360	199	V
			* 14.491891	43.27	ADR	39.5	0.00	-42.80	39.97	54	-14.03	-	-	360	199	V
			* 14.493686	43.17	ADR	39.5	0.00	-42.83	39.84	54	-14.16	-	-	360	199	H
			* 2.798121	57.38	PK-U	32.2	0.00	-46.42	43.16	-	-	74	-30.84	360	101	V
			* 2.804409	45.45	ADR	32.1	0.00	-46.39	31.16	54	-22.84	-	-	360	199	H
			* 2.804801	45.58	ADR	32.1	0.00	-46.39	31.29	54	-22.71	-	-	360	101	V
			* 2.805823	56.81	PK-U	32.1	0.00	-46.39	42.52	-	-	74	-31.48	360	199	H
			1.628603	46.14	ADR	28.2	0.00	-47.60	26.74	68.2	-41.46	-	-	360	101	V
EHT20 (26T RU0)	6535	6+16	1.965170	58.32	PK-U	31.7	0.00	-47.36	42.66	-	-	88.2	-45.54	0	200	V
			1.968797	46.91	ADR	31.8	0.00	-47.41	31.30	68.2	-36.9	-	-	0	200	V
			1.969767	46.99	ADR	31.8	0.00	-47.42	31.37	68.2	-36.83	-	-	0	101	H
			1.971718	58.63	PK-U	31.8	0.00	-47.44	42.99	-	-	88.2	-45.21	0	101	H
			3.030634	55.97	PK-U	32.9	0.00	-45.54	43.33	-	-	88.2	-44.87	0	200	H
			3.031723	44.06	ADR	32.9	0.00	-45.54	31.42	68.2	-36.78	-	-	0	200	H
			3.033962	43.95	ADR	32.9	0.00	-45.53	31.32	68.2	-36.88	-	-	0	101	V
			3.057351	55.56	PK-U	33.0	0.00	-45.58	42.98	-	-	88.2	-45.22	0	101	V
			10.154377	54.50	PK-U	37.2	0.00	-43.10	48.60	-	-	88.2	-39.6	0	200	H
			10.162204	43.03	ADR	37.2	0.00	-42.81	37.42	68.2	-30.78	-	-	0	200	H
			10.164232	43.14	ADR	37.2	0.00	-42.85	37.49	68.2	-30.71	-	-	0	101	V
EHT20 (26T RU4)	6715	6+16	10.181454	54.85	PK-U	37.2	0.00	-42.68	49.37	-	-	88.2	-38.83	0	101	V
			2.016028	58.63	PK-U	31.6	0.00	-47.69	42.54	-	-	88.2	-45.66	0	200	H
			2.020725	47.64	ADR	31.6	0.00	-47.68	31.56	68.2	-36.64	-	-	0	200	H
			2.022970	47.44	ADR	31.6	0.00	-47.68	31.36	68.2	-36.84	-	-	0	200	V
			2.023352	58.71	PK-U	31.6	0.00	-47.68	42.63	-	-	88.2	-45.57	0	200	V
			3.025768	55.78	PK-U	32.9	0.00	-45.56	43.12	-	-	88.2	-45.08	0	101	V
			3.026452	44.21	ADR	32.9	0.00	-45.57	31.54	68.2	-36.66	-	-	0	101	V
			3.030286	44.05	ADR	32.9	0.00	-45.53	31.42	68.2	-36.78	-	-	0	200	H
			3.030815	55.60	PK-U	32.9	0.00	-45.54	42.96	-	-	88.2	-45.24	0	200	H
			10.092036	55.09	PK-U	37.1	0.00	-43.10	49.09	-	-	88.2	-39.11	0	200	V
			10.092956	43.14	ADR	37.1	0.00	-43.11	37.13	68.2	-31.07	-	-	0	101	H
			10.108111	43.11	ADR	37.2	0.00	-42.86	37.45	68.2	-30.75	-	-	0	200	V
EHT20 (26T RU8)	6875	6+16	10.126221	54.56	PK-U	37.2	0.00	-42.93	48.83	-	-	88.2	-39.37	0	101	H
			* 1.699811	59.25	PK-U	29.2	0.00	-47.76	40.69	-	-	74	-33.31	360	101	V
			* 1.700371	47.00	ADR	29.2	0.00	-47.76	28.44	54	-25.56	-	-	360	101	V
			* 1.705168	58.45	PK-U	29.2	0.00	-47.74	39.91	-	-	74	-34.09	360	199	H
			* 1.705324	46.89	ADR	29.2	0.00	-47.74	28.35	54	-25.65	-	-	360	199	H
			* 2.310360	46.61	ADR	32.1	0.00	-47.62	31.09	54	-22.91	-	-	360	101	V
			* 2.312644	58.14	PK-U	32.1	0.00	-47.61	42.63	-	-	74	-31.37	360	199	H
			* 2.312644	58.33	PK-U	32.1	0.00	-47.61	42.82	-	-	74	-31.18	360	101	V
			* 2.314493	46.57	ADR	32.1	0.00	-47.60	31.07	54	-22.93	-	-	360	199	H
			14.529305	43.53	ADR	39.5	0.00	-42.89	40.14	68.2	-28.06	-	-	360	199	V
			14.532769	55.51	PK-U	39.5	0.00	-42.83	52.18	-	-	88.2	-36.02	360	199	V
			14.541636	43.55	ADR	39.5	0.00	-42.78	40.27	68.2	-27.93	-	-	360	101	H
			14.542276	55.52	PK-U	39.5	0.00	-42.79	52.23	-	-	88.2	-35.97	360	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

20MHz (cont.)

UNII-7 (MIMO CDD)	Channel Frequency MHz	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbt/ Filt/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (52+26T RU70)	6535	6+16	6.219187	30.64	ADR	35.6	0.00	-23.45	42.79	68.2	-25.41	-	-	117	128	H
			6.223535	30.77	ADR	35.6	0.00	-23.39	42.98	68.2	-25.22	-	-	169	199	V
			6.227995	42.52	PK-U	35.6	0.00	-23.43	54.69	-	-	88.2	-33.51	169	199	V
			6.236057	42.52	PK-U	35.6	0.00	-23.37	54.75	-	-	88.2	-33.45	117	128	H
			9.265215	45.66	ADR	36.5	0.00	-45.49	36.67	68.2	-31.53	-	-	104	370	V
			9.276608	57.71	PK-U	36.5	0.00	-45.26	48.95	-	-	88.2	-39.25	351	391	H
			9.277953	57.43	PK-U	36.5	0.00	-45.25	48.68	-	-	88.2	-39.52	104	370	V
			9.278972	45.71	ADR	36.5	0.00	-45.21	37.00	68.2	-31.2	-	-	351	391	H
			12.926936	43.98	ADR	39.0	0.00	-43.84	39.14	68.2	-29.06	-	-	46	271	H
			12.944167	56.10	PK-U	38.9	0.00	-43.78	51.22	-	-	88.2	-36.98	46	271	H
			12.954587	56.30	PK-U	38.9	0.00	-43.97	51.23	-	-	88.2	-36.97	2	173	V
			12.956325	44.05	ADR	38.9	0.00	-44.00	38.95	68.2	-29.25	-	-	2	173	V
EHT20 (52+26T RU71)	6715	6+16	* 10.748983	57.22	PK-U	37.7	0.00	-45.64	49.28	-	-	74	-24.72	306	368	H
			* 10.736243	45.46	ADR	37.7	0.00	-45.53	37.63	54	-16.37	-	-	306	368	H
			* 10.73519	56.39	PK-U	37.7	0.00	-45.51	48.58	-	-	74	-25.42	154	248	V
			* 10.756317	44.87	ADR	37.7	0.00	-45.57	37.00	54	-17	-	-	154	248	V
			8.609684	45.44	ADR	36.1	0.00	-45.76	35.78	68.2	-32.42	-	-	155	390	V
			8.614457	45.44	ADR	36.1	0.00	-45.80	35.74	68.2	-32.46	-	-	2	375	H
			8.633966	57.29	PK-U	36.1	0.00	-45.67	47.72	-	-	88.2	-40.48	155	390	V
			8.642842	57.76	PK-U	36.1	0.00	-45.66	48.20	-	-	88.2	-40	2	375	H
			16.506195	56.71	PK-U	40.6	0.00	-43.41	53.90	-	-	88.2	-34.3	358	381	H
			16.511406	56.27	PK-U	40.6	0.00	-43.41	53.46	-	-	88.2	-34.74	136	127	V
			16.518055	44.56	ADR	40.6	0.00	-43.43	41.73	68.2	-26.47	-	-	136	127	V
			16.521346	45.23	ADR	40.6	0.00	-43.41	42.42	68.2	-25.78	-	-	358	381	H
EHT20 (52+26T RU72)	6875	6+16	* 11.1359	56.79	PK-U	38.0	0.00	-44.13	50.66	-	-	74	-23.34	326	397	H
			* 11.157618	45.23	ADR	38.0	0.00	-44.39	38.84	54	-15.16	-	-	326	397	H
			* 16.005192	56.47	PK-U	40.5	0.00	-42.99	53.98	-	-	74	-20.02	324	399	H
			* 16.007538	44.29	ADR	40.5	0.00	-43.09	41.70	54	-12.3	-	-	324	399	H
			* 11.149087	56.62	PK-U	38.0	0.00	-44.17	50.45	-	-	74	-23.55	2	332	V
			* 11.153655	44.67	ADR	38.0	0.00	-44.27	38.40	54	-15.6	-	-	2	332	V
			* 16.017787	55.76	PK-U	40.5	0.00	-43.07	53.19	-	-	74	-20.81	2	261	V
			* 16.020482	43.94	ADR	40.5	0.00	-43.08	41.36	54	-12.64	-	-	2	261	V
			9.262926	45.51	ADR	36.5	0.00	-45.52	36.49	68.2	-31.71	-	-	17	391	V
			9.264272	56.57	PK-U	36.5	0.00	-45.49	47.58	-	-	88.2	-40.62	30	239	H
			9.273944	45.03	ADR	36.5	0.00	-45.28	36.25	68.2	-31.95	-	-	30	239	H
			9.277281	57.26	PK-U	36.5	0.00	-45.24	48.52	-	-	88.2	-39.68	17	391	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

40MHz

UNII-7 (MIMO CDD)	Channel Frequency MHz	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbt/ Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT40 (SU Mode)	6565	6+16	* 1.694338	58.52	PK-U	29.1	0.00	-47.74	39.88	-	-	74	-34.12	360	200	V
			* 1.697697	46.87	ADR	29.1	0.00	-47.77	28.20	54	-25.8	-	-	360	101	H
			* 1.699813	46.87	ADR	29.2	0.00	-47.76	28.31	54	-25.69	-	-	360	200	V
			* 1.701554	58.56	PK-U	29.2	0.00	-47.76	40.00	-	-	74	-34	360	101	H
			* 13.398662	53.24	PK-U	39.1	0.00	-41.79	50.55	-	-	74	-23.45	360	200	H
			* 2.801952	45.41	ADR	32.1	0.00	-46.40	31.11	54	-22.89	-	-	360	200	H
			* 2.803454	57.86	PK-U	32.1	0.00	-46.39	43.57	-	-	74	-30.43	360	101	V
			* 2.809627	57.12	PK-U	32.1	0.00	-46.42	42.80	-	-	74	-31.2	360	200	H
			* 2.811089	45.53	ADR	32.1	0.00	-46.43	31.20	54	-22.8	-	-	360	101	V
			13.412304	42.02	ADR	39.1	0.00	-41.75	39.37	68.2	-28.83	-	-	360	101	V
			13.412376	53.47	PK-U	39.1	0.00	-41.75	50.82	-	-	88.2	-37.38	360	101	V
			13.413588	41.77	ADR	39.1	0.00	-41.73	39.14	68.2	-29.06	-	-	360	200	H
	6685	6+16	* 1.699761	58.80	PK-U	29.2	0.00	-47.76	40.24	-	-	74	-33.76	360	101	V
			* 1.699815	47.04	ADR	29.2	0.00	-47.76	28.48	54	-25.52	-	-	360	101	V
			* 1.699851	47.02	ADR	29.2	0.00	-47.76	28.46	54	-25.54	-	-	360	200	H
			* 1.705473	58.62	PK-U	29.2	0.00	-47.74	40.08	-	-	74	-33.92	360	200	H
			* 2.350650	58.38	PK-U	32.2	0.00	-47.47	43.11	-	-	74	-30.89	360	101	V
			* 2.367164	46.71	ADR	32.2	0.00	-47.49	31.42	54	-22.58	-	-	360	101	V
			* 2.371129	58.59	PK-U	32.2	0.00	-47.51	43.28	-	-	74	-30.72	360	200	H
			* 2.371360	46.44	ADR	32.2	0.00	-47.50	31.14	54	-22.86	-	-	360	200	H
			13.432713	42.03	ADR	39.1	0.00	-41.85	39.28	68.2	-28.92	-	-	360	101	H
			13.438416	53.69	PK-U	39.1	0.00	-41.84	50.95	-	-	88.2	-37.25	360	101	V
			13.443264	53.87	PK-U	39.1	0.00	-41.83	51.14	-	-	88.2	-37.06	360	101	H
			13.450299	42.23	ADR	39.1	0.00	-41.82	39.51	68.2	-28.69	-	-	360	101	V
	6845	6+16	* 1.693865	58.80	PK-U	29.1	0.00	-47.74	40.16	-	-	74	-33.84	360	101	H
			* 1.699966	46.96	ADR	29.2	0.00	-47.76	28.40	54	-25.6	-	-	360	101	H
			* 1.703199	58.42	PK-U	29.2	0.00	-47.76	39.86	-	-	74	-34.14	360	101	V
			* 1.705892	47.26	ADR	29.3	0.00	-47.73	28.83	54	-25.17	-	-	360	101	V
			* 2.799698	45.31	ADR	32.2	0.00	-46.42	31.09	54	-22.91	-	-	360	200	V
			* 2.802279	45.47	ADR	32.1	0.00	-46.40	31.17	54	-22.83	-	-	360	101	H
			* 2.802800	57.56	PK-U	32.1	0.00	-46.39	43.27	-	-	74	-30.73	360	200	V
			* 2.811638	57.53	PK-U	32.1	0.00	-46.44	43.19	-	-	74	-30.81	360	101	H
			14.528358	43.40	ADR	39.5	0.00	-42.86	40.04	68.2	-28.16	-	-	360	200	V
			14.532934	55.12	PK-U	39.5	0.00	-42.82	51.80	-	-	88.2	-36.4	360	101	H
			14.534498	55.04	PK-U	39.5	0.00	-42.85	51.69	-	-	88.2	-36.51	360	200	V
			14.542797	43.44	ADR	39.5	0.00	-42.81	40.13	68.2	-28.07	-	-	360	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

80MHz

UNII-7 (MIMO CDD)	Channel Frequency MHz	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbt/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT80 (SU Mode)	6545	6+16	* 4.068824	51.63	PK-U	33.3	0.00	-41.70	43.23	-	-	74	-30.77	360	101	H
			* 4.077174	40.13	ADR	33.3	0.00	-41.70	31.73	54	-22.27	-	-	360	101	H
			* 4.073099	51.98	PK-U	33.3	0.00	-41.70	43.58	-	-	74	-30.42	360	200	V
			* 4.072237	40.29	ADR	33.3	0.00	-41.70	31.89	54	-22.11	-	-	360	200	V
			* 11.167800	47.98	PK-U	37.9	0.00	-35.40	50.48	-	-	74	-23.52	360	200	H
			* 11.188420	36.48	ADR	37.9	0.00	-35.70	38.68	54	-15.32	-	-	360	200	H
			* 11.183892	47.92	PK-U	37.9	0.00	-35.60	50.22	-	-	74	-23.78	360	200	V
			* 11.165014	36.44	ADR	37.9	0.00	-35.50	38.84	54	-15.16	-	-	360	200	V
			2.617751	42.93	ADR	32.2	0.00	-43.80	31.33	68.2	-36.87	-	-	360	101	V
			2.620213	55.83	PK-U	32.1	0.00	-43.80	44.13	-	-	88.2	-44.07	360	101	V
			2.620355	54.28	PK-U	32.1	0.00	-43.80	42.58	-	-	88.2	-45.62	360	101	H
			2.622150	42.94	ADR	32.1	0.00	-43.80	31.24	68.2	-36.96	-	-	360	101	H
			* 1.264752	46.34	ADR	29.2	0.00	-46.30	29.24	68.2	-38.96	-	-	360	101	V
			* 1.265485	46.28	ADR	29.2	0.00	-46.30	29.18	68.2	-39.02	-	-	360	101	H
			* 1.267387	58.30	PK-U	29.3	0.00	-46.30	41.30	-	-	88.2	-46.9	360	101	V
			* 1.268755	58.06	PK-U	29.3	0.00	-46.30	41.06	-	-	88.2	-47.14	360	101	H
			* 13.327774	46.80	PK-U	39.1	0.00	-34.70	51.20	-	-	74	-22.8	360	200	V
	6705	6+16	* 13.336075	35.13	ADR	39.1	0.00	-34.60	39.63	54	-14.37	-	-	360	200	V
			* 13.341667	47.62	PK-U	39.1	0.00	-34.50	52.22	-	-	74	-21.78	360	200	H
			* 13.362255	35.11	ADR	39.1	0.00	-34.50	39.71	54	-14.29	-	-	360	200	H
			* 3.357938	52.26	PK-U	32.5	0.00	-42.20	42.56	-	-	74	-31.44	360	200	V
			3.360231	41.01	ADR	32.5	0.00	-42.30	31.21	68.2	-36.99	-	-	360	199	H
			3.364648	41.10	ADR	32.5	0.00	-42.30	31.30	68.2	-36.9	-	-	360	200	V
			3.367537	53.33	PK-U	32.5	0.00	-42.30	43.53	-	-	88.2	-44.67	360	199	H
			* 1.670693	57.21	PK-U	29.1	0.00	-46.30	40.01	-	-	74	-33.99	360	101	V
			* 1.673844	45.66	ADR	29.1	0.00	-46.30	28.46	54	-25.54	-	-	360	200	H
			* 1.674097	45.50	ADR	29.1	0.00	-46.30	28.30	54	-25.7	-	-	360	101	V
			* 1.674395	57.20	PK-U	29.1	0.00	-46.30	40.00	-	-	74	-34	360	200	H
			* 3.797550	52.82	PK-U	33.5	0.00	-41.90	44.42	-	-	74	-29.58	360	200	V
			* 3.802550	40.78	ADR	33.5	0.00	-41.80	32.48	54	-21.52	-	-	360	200	V
			* 3.803425	40.72	ADR	33.5	0.00	-41.80	32.42	54	-21.58	-	-	360	200	H
			* 3.805265	52.25	PK-U	33.5	0.00	-41.80	43.95	-	-	74	-30.05	360	200	H
			13.714704	45.97	PK-U	38.7	0.00	-34.70	49.97	-	-	88.2	-38.23	360	200	V
	6865	6+16	13.730449	34.30	ADR	38.6	0.00	-34.70	38.20	68.2	-30	-	-	360	200	V
			13.747919	34.23	ADR	38.6	0.00	-34.50	38.33	68.2	-29.87	-	-	360	200	H
			13.757109	45.98	PK-U	38.6	0.00	-34.40	50.18	-	-	88.2	-38.02	360	200	H
			* 2.495370	48.21	ADR	32.4	0.00	-48.79	31.82	54	-22.18	-	-	0	101	H
			* 2.483550	59.99	PK-U	32.3	0.00	-48.87	43.42	-	-	74	-30.58	0	199	V
			* 2.491678	47.86	ADR	32.4	0.00	-48.83	31.43	54	-22.57	-	-	0	199	V
			* 11.849660	54.88	PK-U	38.7	0.00	-42.05	51.53	-	-	74	-22.47	0	101	H
			* 11.868802	43.34	ADR	38.7	0.00	-41.52	40.52	54	-13.48	-	-	0	101	H
			* 12.367553	55.35	PK-U	38.9	0.00	-42.13	52.12	-	-	74	-21.88	0	101	H
			* 12.347931	43.67	ADR	38.9	0.00	-42.08	40.49	54	-13.51	-	-	0	101	H
			* 11.849380	54.95	PK-U	38.7	0.00	-42.09	51.56	-	-	74	-22.44	0	200	V
			* 11.853376	43.14	ADR	38.7	0.00	-41.87	39.97	54	-14.03	-	-	0	200	V
			* 12.370441	55.28	PK-U	38.9	0.00	-42.29	51.89	-	-	74	-22.11	0	200	V
			* 12.377812	43.80	ADR	38.9	0.00	-42.65	40.05	54	-13.95	-	-	0	200	V
			2.505316	59.41	PK-U	32.4	0.00	-48.75	43.06	-	-	88.2	-45.14	0	101	H
EHT80 (484+242T RU90)	6865	6+16	* 12.537326	56.21	PK-U	39.0	0.00	-43.69	51.52	-	-	74	-22.48	360	198	V
			* 12.543989	44.35	ADR	39.0	0.00	-43.66	39.69	54	-14.31	-	-	360	198	H
			* 12.545637	56.17	PK-U	39.0	0.00	-43.66	51.51	-	-	74	-22.49	360	198	H
			* 12.564163	44.45	ADR	39.0	0.00	-43.23	40.22	54	-13.78	-	-	360	198	V
			* 2.288997	60.35	PK-U	31.6	0.00	-49.30	42.65	-	-	74	-31.35	360	101	V
			* 2.317294	60.12	PK-U	31.7	0.00	-49.11	42.71	-	-	74	-31.29	360	101	H
			* 4.257457	57.28	PK-U	33.6	0.00	-46.78	44.10	-	-	74	-29.9	360	198	V
			* 4.258303	45.75	ADR	33.6	0.00	-46.78	32.57	54	-21.43	-	-	360	199	H
			* 4.258950	45.68	ADR	33.6	0.00	-46.80	32.48	54	-21.52	-	-	360	198	V
			* 4.274919	57.31	PK-U	33.6	0.00	-46.81	44.10	-	-	74	-29.9	360	199	H
			2.302213	48.12	ADR	31.7	0.00	-49.26	30.56	68.2	-37.64	-	-	360	101	V
			2.303980	48.15	ADR	31.7	0.00	-49.22	30.63	68.2	-37.57	-	-	360	101	H
EHT80 (484+242T RU93)	6545	6+16	* 11.889289	54.91	PK-U	38.7	0.00	-42.14	51.47	-	-	74	-22.53	360	200	H
			* 11.891625	43.16	ADR	38.7	0.00	-42.17	39.69	54	-14.31	-	-	360	200	H
			* 11.898816	55.61	PK-U	38.7	0.00	-42.28	52.03	-	-	74	-21.97	360	200	V
			* 11.898616	43.19	ADR	38.7	0.00	-42.27	39.62	54	-14.38	-	-	360	200	V
			3.452257	56.86	PK-U	32.9	0.00	-46.10	43.66	-	-	88.2	-44.54	360	199	H
			3.453759	44.30	ADR	32.9	0.00	-46.08	31.12	68.2	-37.08	-	-	360	199	H
			3.464776	56.11	PK-U	32.9	0.00	-45.96	43.05	-	-	88.2	-45.15	360	101	V
			3.465754	44.35	ADR	32.9	0.00	-46.00	31.25	68.2	-36.95	-	-	360	101	V
			15.162146	56.90	PK-U	39.6	0.00	-42.17	54.33	-	-	88.2	-33.87	360	101	H
			15.165201	45.22	ADR	39.6	0.00	-42.24	42.58	68.2	-25.62	-	-	360	200	V
			15.170013	57.10	PK-U	39.6	0.00	-42.40	54.30	-	-	88.2	-33.9	360	200	V
			15.173069	45.21	ADR	39.6	0.00	-42.56	42.25	68.2	-25.95	-	-	360	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

160MHz

UNII-7 (MIMO CDD)	Channel Frequency MHz	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbt/ Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT160 (SU Mode)	6665	6+16	* 3.913804	51.93	PK-U	33.4	0.00	-41.70	43.63	-	-	74	-30.37	360	150	H
			* 3.914755	51.88	PK-U	33.4	0.00	-41.70	43.58	-	-	74	-30.42	360	200	V
			* 3.912017	40.42	ADR	33.4	0.00	-41.70	32.12	54	-21.88	-	-	360	200	V
			* 13.335521	46.03	PK-U	39.1	0.00	-34.50	50.63	-	-	74	-23.37	360	101	H
			* 13.344400	34.69	ADR	39.1	0.00	-34.50	39.29	54	-14.71	-	-	360	101	H
			* 13.326299	46.52	PK-U	39.1	0.00	-34.70	50.92	-	-	74	-23.08	360	200	V
			* 13.327921	35.08	ADR	39.1	0.00	-34.70	39.48	54	-14.52	-	-	360	200	V
			2.401094	43.69	ADR	32.4	0.00	-44.60	31.49	68.2	-36.71	-	-	360	199	H
			2.401703	43.52	ADR	32.4	0.00	-44.60	31.32	68.2	-36.88	-	-	360	101	V
			2.402801	54.93	PK-U	32.4	0.00	-44.60	42.73	-	-	88.2	-45.47	360	199	H
			2.439886	55.64	PK-U	32.2	0.00	-44.40	43.44	-	-	88.2	-44.76	360	101	V
			* 1.423303	57.55	PK-U	28.7	0.00	-46.10	40.15	-	-	74	-33.85	360	101	V
			* 1.424481	58.18	PK-U	28.7	0.00	-46.10	40.78	-	-	74	-33.22	360	199	H
			* 1.439768	57.55	PK-U	28.6	0.00	-46.10	40.05	-	-	74	-33.95	360	101	V
			* 3.842710	52.33	PK-U	33.4	0.00	-41.70	44.03	-	-	74	-29.97	360	199	V
			* 3.853091	40.76	ADR	33.4	0.00	-41.70	32.46	54	-21.54	-	-	360	199	H
	6825	6+16	* 3.855326	40.60	ADR	33.4	0.00	-41.70	32.30	54	-21.7	-	-	360	199	V
			* 3.858210	51.94	PK-U	33.4	0.00	-41.60	43.74	-	-	74	-30.26	360	199	H
			1.428138	46.20	ADR	28.7	0.00	-46.10	28.80	68.2	-39.4	-	-	360	101	V
			1.428338	46.34	ADR	28.7	0.00	-46.10	28.94	68.2	-39.26	-	-	360	199	H
			1.431138	46.13	ADR	28.6	0.00	-46.10	28.63	68.2	-39.57	-	-	360	101	V
			13.619190	34.82	ADR	38.7	0.00	-34.40	39.12	68.2	-29.08	-	-	360	200	V
			13.625815	46.63	PK-U	38.7	0.00	-34.30	51.03	-	-	88.2	-37.17	360	200	V
			13.633246	34.54	ADR	38.7	0.00	-34.30	38.94	68.2	-29.26	-	-	360	101	H
			13.663821	46.23	PK-U	38.7	0.00	-34.60	50.33	-	-	88.2	-37.87	360	101	H
EHT160 (996+484T S95)	6665	6+16	* 10.608194	56.27	PK-U	37.8	0.00	-43.56	50.51	-	-	74	-23.49	360	200	V
			* 10.621516	55.73	PK-U	37.8	0.00	-43.69	49.84	-	-	74	-24.16	360	200	H
			* 2.861264	58.43	PK-U	32.1	0.00	-47.95	42.58	-	-	74	-31.42	360	198	V
			* 2.878476	46.65	ADR	32.1	0.00	-47.91	30.84	54	-23.16	-	-	360	198	V
			* 2.882796	46.81	ADR	32.1	0.00	-47.92	30.99	54	-23.01	-	-	360	198	H
			* 2.889107	58.47	PK-U	32.1	0.00	-47.85	42.72	-	-	74	-31.28	360	198	H
			10.592279	44.29	ADR	37.7	0.00	-43.70	38.29	68.2	-29.91	-	-	360	200	V
			10.598255	44.45	ADR	37.8	0.00	-43.83	38.42	68.2	-29.78	-	-	360	200	H
			15.157570	45.36	ADR	39.6	0.00	-42.27	42.69	68.2	-25.51	-	-	360	200	V
			15.165554	57.05	PK-U	39.6	0.00	-42.26	54.39	-	-	88.2	-33.81	360	200	V
			15.173773	45.26	ADR	39.6	0.00	-42.56	42.30	68.2	-25.9	-	-	360	200	H
			15.179544	56.80	PK-U	39.6	0.00	-42.92	53.48	-	-	88.2	-34.72	360	200	H
EHT160 (996+484T S94)	6825	6+16	1.856871	59.60	PK-U	30.8	0.00	-48.55	41.85	-	-	88.2	-46.35	0	200	H
			1.857944	59.83	PK-U	30.8	0.00	-48.56	42.07	-	-	88.2	-46.13	0	101	V
			1.860779	48.20	ADR	30.9	0.00	-48.54	30.56	68.2	-37.64	-	-	0	101	V
			1.862613	48.03	ADR	30.9	0.00	-48.50	30.43	68.2	-37.77	-	-	0	200	H
			11.013614	43.95	ADR	37.9	0.00	-42.68	39.17	54	-14.83	-	-	0	199	H
			11.023314	43.81	ADR	37.9	0.00	-42.61	39.10	54	-14.9	-	-	0	200	V
			11.029293	55.37	PK-U	37.9	0.00	-42.42	50.85	-	-	74	-23.15	0	199	H
			11.038704	55.78	PK-U	37.9	0.00	-42.18	51.50	-	-	74	-22.5	0	200	V
			11.861703	43.15	ADR	38.7	0.00	-41.53	40.32	54	-13.68	-	-	0	101	H
			11.867258	54.91	PK-U	38.7	0.00	-41.57	52.04	-	-	74	-21.96	0	200	V
			11.870798	54.76	PK-U	38.7	0.00	-41.52	51.94	-	-	74	-22.06	0	101	H
			11.875853	43.29	ADR	38.7	0.00	-41.69	40.30	54	-13.7	-	-	0	200	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

WORST-CASE HARMONICS AND SPURIOUS EMISSIONS

802.11be EHT80 / 183 & 6865 / 2TX / CDD / 484+242T / RU90

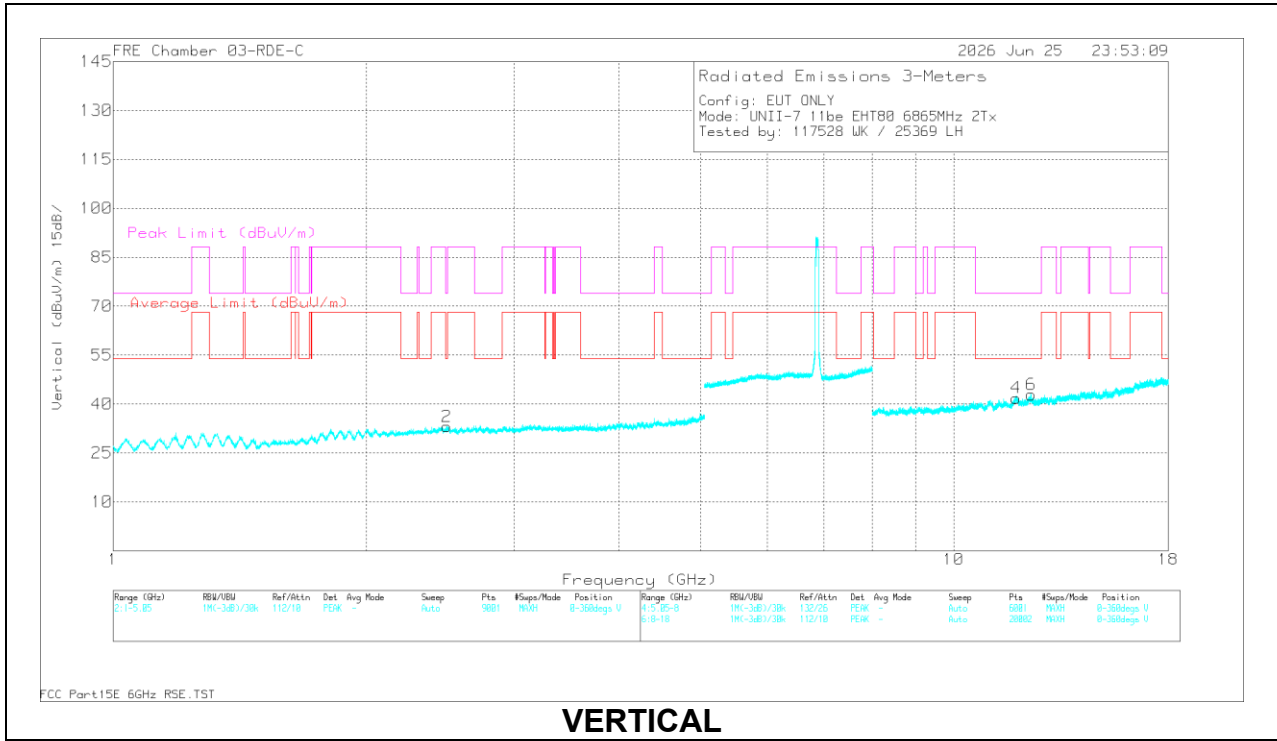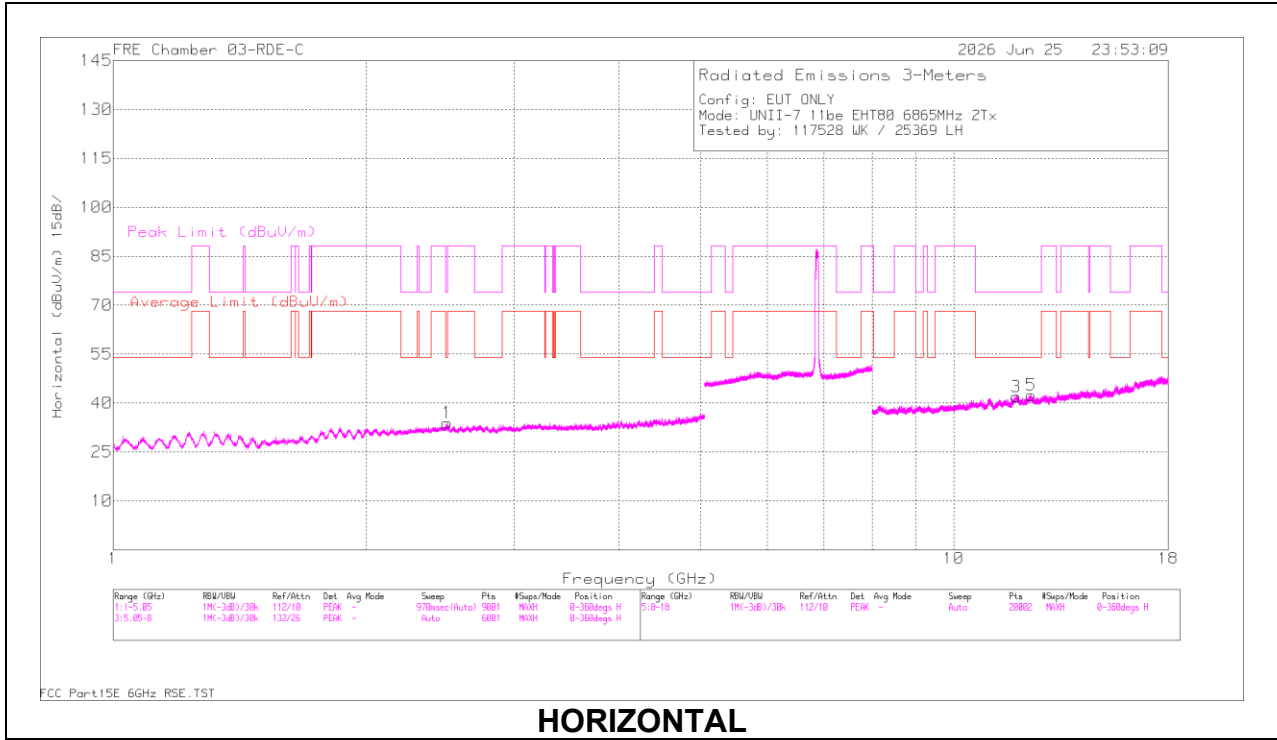

RADIATED EMISSIONS

Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbt/ Filt/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 2.495370	48.21	ADR	32.4	0.00	-48.79	31.82	54	-22.18	-	-	0	101	H
* 2.483550	59.99	PK-U	32.3	0.00	-48.87	43.42	-	-	74	-30.58	0	199	V
* 2.491678	47.86	ADR	32.4	0.00	-48.83	31.43	54	-22.57	-	-	0	199	V
* 11.849660	54.88	PK-U	38.7	0.00	-42.05	51.53	-	-	74	-22.47	0	101	H
* 11.868802	43.34	ADR	38.7	0.00	-41.52	40.52	54	-13.48	-	-	0	101	H
* 12.367553	55.35	PK-U	38.9	0.00	-42.13	52.12	-	-	74	-21.88	0	101	H
* 12.347931	43.67	ADR	38.9	0.00	-42.08	40.49	54	-13.51	-	-	0	101	H
* 11.849380	54.95	PK-U	38.7	0.00	-42.09	51.56	-	-	74	-22.44	0	200	V
* 11.853376	43.14	ADR	38.7	0.00	-41.87	39.97	54	-14.03	-	-	0	200	V
* 12.370441	55.28	PK-U	38.9	0.00	-42.29	51.89	-	-	74	-22.11	0	200	V
* 12.377812	43.80	ADR	38.9	0.00	-42.65	40.05	54	-13.95	-	-	0	200	V
2.505316	59.41	PK-U	32.4	0.00	-48.75	43.06	-	-	88.2	-45.14	0	101	H

1.1.8. 802.11a SISO MODE IN UNII-8 BAND – BANDEDGE

UNII-8 (SISO)	Channel Frequency MHz	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11a	7115	6	7.125000	-26.26	Pk	35.4	11.8	0.00	-35.80	-14.86	-	-	-7	-7.86	58	155	H
			7.125068	-26.90	Pk	35.4	11.8	0.00	-35.80	-15.50	-	-	-7	-8.50	58	155	H
			7.125000	-41.94	RMS	35.4	11.8	0.00	-35.80	-30.54	-27	-3.54	-	-	58	155	H
			7.125068	-44.53	RMS	35.4	11.8	0.00	-35.80	-33.13	-27	-6.13	-	-	58	155	H
			7.125000	-24.22	Pk	35.4	11.8	0.00	-35.80	-12.82	-	-	-7	-5.82	27	216	V
			7.125068	-24.58	Pk	35.4	11.8	0.00	-35.80	-13.18	-	-	-7	-6.18	27	216	V
		16	7.125000	-41.42	RMS	35.4	11.8	0.00	-35.80	-30.02	-27	-3.02	-	-	27	216	V
			7.125068	-42.30	RMS	35.4	11.8	0.00	-35.80	-30.90	-27	-3.90	-	-	27	216	V
			7.125	-42.14	RMS	35.7	11.8	0.00	-35.7	-30.34	-27	-3.34	-	-	344	213	H
			7.125068	-43.87	RMS	35.7	11.8	0.00	-35.7	-32.07	-27	-5.07	-	-	344	213	H
			7.125	-25.96	Pk	35.7	11.8	0.00	-35.7	-14.16	-	-	-7	-7.16	344	213	H
			7.125145	-26.18	Pk	35.7	11.8	0.00	-35.7	-14.38	-	-	-7	-7.38	344	213	H
			* 7.406235	-60.46	RMS	35.7	11.8	0.00	-35.3	-48.26	-41.2	-7.06	-	-	255	126	V
			7.125	-45.48	RMS	35.7	11.8	0.00	-35.7	-33.68	-27	-6.68	-	-	255	126	V
			7.125	-28.88	Pk	35.7	11.8	0.00	-35.7	-17.08	-	-	-7	-10.08	255	126	V
			7.125068	-27.83	Pk	35.7	11.8	0.00	-35.7	-16.03	-	-	-7	-9.03	255	126	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.9. 802.11be SISO SU MODE IN UNII-8 BAND – BANDEDGE

UNII-8 (SISO)	Channel Frequency MHz	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (SU Mode)	7095	6	7.125000	-40.82	Pk	35.7	11.8	0.00	-35.70	-29.02	-	-	-7	-22.02	123	144	H
			* 7.387724	-48.13	Pk	35.7	11.8	0.00	-35.37	-36.00	-	-	-21.2	-14.80	123	144	H
			7.125000	-57.13	RMS	35.7	11.8	0.00	-35.70	-45.33	-27	-18.33	-	-	123	144	H
			* 7.367579	-60.25	RMS	35.7	11.8	0.00	-35.46	-48.21	-41.2	-7.01	-	-	123	144	H
			7.125000	-41.01	Pk	35.7	11.8	0.00	-35.70	-29.21	-	-	-7	-22.21	89	198	V
			* 7.270590	-48.02	Pk	35.7	11.8	0.00	-35.74	-36.26	-	-	-21.2	-15.06	89	198	V
			7.125000	-55.79	RMS	35.7	11.8	0.00	-35.70	-43.99	-27	-16.99	-	-	89	198	V
			* 7.366257	-60.36	RMS	35.7	11.8	0.00	-35.40	-48.26	-41.2	-7.06	-	-	89	198	V
		16	7.125000	-42.12	Pk	35.6	11.8	0.00	-33.85	-28.57	-	-	-7	-21.57	358	335	H
			7.430346	-49.07	Pk	35.6	11.8	0.00	-33.81	-35.48	-	-	-21.2	-14.28	358	335	H
			7.125000	-57.62	RMS	35.6	11.8	0.00	-33.85	-44.07	-27	-17.07	-	-	358	335	H
			7.402813	-61.23	RMS	35.6	11.8	0.00	-33.84	-47.67	-41.2	-6.47	-	-	358	335	H
			7.125000	-49.10	Pk	35.6	11.8	0.00	-33.85	-35.55	-	-	-7	-28.55	333	200	V
			7.417202	-49.16	Pk	35.6	11.8	0.00	-33.83	-35.59	-	-	-21.2	-14.39	333	200	V
			7.125000	-61.32	RMS	35.6	11.8	0.00	-33.85	-47.77	-27	-20.77	-	-	333	200	V
			7.478491	-61.33	RMS	35.6	11.8	0.00	-33.78	-47.71	-41.2	-6.51	-	-	333	200	V
EHT40 (SU Mode)	7085	6	7.125000	-42.57	Pk	35.7	11.8	0.00	-22.76	-17.83	-	-	-7	-10.83	89	194	H
			7.125690	-41.98	Pk	35.7	11.8	0.00	-22.80	-17.28	-	-	-7	-10.28	89	194	H
			7.125000	-56.40	RMS	35.7	11.8	0.00	-22.76	-31.66	-27	-4.66	-	-	89	194	H
			7.125301	-56.29	RMS	35.7	11.8	0.00	-22.78	-31.57	-27	-4.57	-	-	89	194	H
			7.125000	-43.23	Pk	35.7	11.8	0.00	-22.76	-18.49	-	-	-7	-11.49	92	239	V
			7.126001	-41.18	Pk	35.7	11.8	0.00	-22.82	-16.50	-	-	-7	-9.50	92	239	V
			7.125000	-56.18	RMS	35.7	11.8	0.00	-22.76	-31.44	-27	-4.44	-	-	92	239	V
			7.125456	-56.41	RMS	35.7	11.8	0.00	-22.79	-31.70	-27	-4.70	-	-	92	239	V
		16	7.125000	-37.28	Pk	35.6	11.8	0.00	-33.85	-23.73	-	-	-7	-16.73	267	150	H
			7.507424	-49.05	Pk	35.6	11.8	0.00	-33.75	-35.40	-	-	-21.2	-14.20	267	150	H
			7.125000	-50.77	RMS	35.6	11.8	0.00	-33.85	-37.22	-27	-10.22	-	-	267	150	H
			7.396668	-61.07	RMS	35.6	11.8	0.00	-33.79	-47.46	-41.2	-6.26	-	-	267	150	H
			7.125000	-46.26	Pk	35.6	11.8	0.00	-33.85	-32.71	-	-	-7	-25.71	267	150	V
			7.310801	-49.29	Pk	35.6	11.8	0.00	-33.95	-35.84	-	-	-21.2	-14.64	267	150	V
			7.125000	-59.07	RMS	35.6	11.8	0.00	-33.85	-45.52	-27	-18.52	-	-	267	150	V
			7.458191	-61.28	RMS	35.6	11.8	0.00	-33.84	-47.72	-41.2	-6.52	-	-	267	150	V
EHT80 (SU Mode)	7025	6	7.125000	-38.37	Pk	35.7	11.8	0.00	-37.88	-28.75	-	-	-7	-21.75	240	174	H
			7.358168	-47.01	Pk	35.6	11.8	0.00	-37.99	-37.60	-	-	-21.2	-16.40	240	174	H
			7.125000	-51.66	RMS	35.7	11.8	0.00	-37.88	-42.04	-27	-15.04	-	-	240	174	H
			7.355135	-59.26	RMS	35.6	11.8	0.00	-37.95	-49.81	-41.2	-8.61	-	-	240	174	H
			7.125000	-38.72	Pk	35.7	11.8	0.00	-37.88	-29.10	-	-	-7	-22.10	206	191	V
			7.259546	-47.99	Pk	35.6	11.8	0.00	-37.68	-38.27	-	-	-21.2	-17.07	206	191	V
			7.125000	-52.86	RMS	35.7	11.8	0.00	-37.88	-43.24	-27	-16.24	-	-	206	191	V
			7.308857	-59.64	RMS	35.6	11.8	0.00	-37.81	-50.05	-41.2	-8.85	-	-	206	191	V
		16	7.125	-38.78	Pk	35.6	11.8	0.00	-33.85	-25.23	-	-	-7	-18.23	259	323	H
			7.512402	-49.31	Pk	35.6	11.8	0.00	-33.71	-35.62	-	-	-21.2	-14.42	259	323	H
			7.125	-53.11	RMS	35.6	11.8	0.00	-33.85	-39.56	-27	-12.56	-	-	259	323	H
			7.395191	-61.23	RMS	35.6	11.8	0.00	-33.82	-47.65	-41.2	-6.45	-	-	259	323	H
			7.125	-42.92	Pk	35.6	11.8	0.00	-33.85	-29.37	-	-	-7	-22.37	161	329	V
			7.513569	-48.94	Pk	35.6	11.8	0.00	-33.7	-35.24	-	-	-21.2	-14.04	161	329	V
			7.125	-56.86	RMS	35.6	11.8	0.00	-33.85	-43.31	-27	-16.31	-	-	161	329	V
			7.414868	-61.16	RMS	35.6	11.8	0.00	-33.81	-47.57	-41.2	-6.37	-	-	161	329	V
EHT160 (SU Mode)	6985	6	* 7.258146	-59.32	RMS	35.7	11.8	0.14	-35.89	-47.57	-41.20	-6.37	-	-	153.00	250	H
			7.125000	-34.78	Pk	35.7	11.8	0.00	-35.70	-22.98	-	-	-7.00	-15.98	153.00	250	H
			7.125000	-46.47	RMS	35.7	11.8	0.14	-35.70	-34.53	-27.00	-7.53	-	-	153.00	250	H
			7.132145	-31.42	Pk	35.7	11.8	0.00	-35.79	-19.71	-	-	-7.00	-12.71	153.00	250	H
			7.125000	-34.36	Pk	35.7	11.8	0.00	-35.70	-22.56	-	-	-7	-15.56	65	309	V
			7.125000	-46.35	RMS	35.7	11.8	0.14	-35.70	-34.41	-27	-7.41	-	-	65	309	V
			7.128645	-45.32	RMS	35.8	11.8	0.14	-35.66	-33.24	-27	-6.24	-	-	65	309	V
			7.130123	-32.12	Pk	35.7	11.8	0.00	-35.70	-20.32	-	-	-7	-13.32	65	309	V
		16	7.125	-33.37	Pk	35.6	11.8	0.00	-33.85	-19.82	-	-	-7	-12.82	2	270	H
			7.125145	-30.98	Pk	35.6	11.8	0.00	-33.85	-17.43	-	-	-7	-10.43	2	270	H
			7.125	-44.84	RMS	35.6	11.8	0.14	-33.85	-31.15	0.00	-4.15	-	-	2	270	H
			7.127868	-44	RMS	35.6	11.8	0.14	-33.8	-30.26	-27	-3.26	-	-	2	270	H
			7.125	-39.28	Pk	35.6	11.8	0.00	-33.85	-25.73	-	-	-7	-18.73	256	317	V
			7.284357	-49	Pk	35.6	11.8	0.00	-33.95	-35.55	-	-	-21.2	-14.35	256	317	V
			7.125	-50.61	RMS	35.6	11.8	0.14	-33.85	-36.92	-27	-9.92	-	-	256	317	V
			7.257368	-60.94	RMS	35.6	11.8	0.14	-33.9	-47.3	-41.2	-6.1	-	-	256	317	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.10. 802.11be SISO PARTIAL RU MODE IN UNII-8 BAND – BANDEDGE

UNII-8 (SISO)	Channel Frequency MHz	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (26T RU8)	7095	6	7.125000	-49.68	Pk	35.4	11.8	0.00	-35.80	-38.28	-	-	-7	-31.28	43	180	H
			7.331646	-47.63	Pk	35.4	11.8	0.00	-35.56	-35.99	-	-	-21.2	-14.79	43	180	H
			7.125000	-61.05	RMS	35.4	11.8	0.00	-35.80	-49.65	-27	-22.65	-	-	43	180	H
			7.390213	-60.26	RMS	35.4	11.8	0.00	-35.44	-48.50	-41.2	-7.30	-	-	43	180	H
			7.125000	-50.16	Pk	35.4	11.8	0.00	-35.80	-38.76	-	-	-7	-31.76	307	147	V
			7.354590	-47.84	Pk	35.4	11.8	0.00	-35.64	-36.28	-	-	-21.2	-15.08	307	147	V
			7.125000	-61.03	RMS	35.4	11.8	0.00	-35.80	-49.63	-27	-22.63	-	-	307	147	V
		16	7.482380	-60.22	RMS	35.4	11.8	0.00	-35.34	-48.36	-41.2	-7.16	-	-	307	147	V
			7.125000	-49.67	Pk	35.7	11.8	0.00	-37.80	-39.97	-	-	-7	-32.97	357	231	H
			7.338335	-47.12	Pk	35.6	11.8	0.00	-38.00	-37.72	-	-	-21.2	-16.52	357	231	H
			7.125000	-60.16	RMS	35.7	11.8	0.00	-37.80	-50.46	-27	-23.46	-	-	357	231	H
			7.521035	-59.20	RMS	35.7	11.8	0.00	-37.90	-49.60	-41.2	-8.40	-	-	357	231	H
			7.125000	-49.30	Pk	35.7	11.8	0.00	-37.80	-39.60	-	-	-7	-32.60	12	177	V
			7.398224	-45.95	Pk	35.6	11.8	0.00	-38.28	-36.83	-	-	-21.2	-15.63	12	177	V
			7.125000	-60.48	RMS	35.7	11.8	0.00	-37.80	-50.78	-27	-23.78	-	-	12	177	V
EHT20 (52+26T RU72)	7095	6	7.520102	-59.25	RMS	35.7	11.8	0.00	-37.81	-49.56	-41.2	-8.36	-	-	12	177	V
			7.125000	-50.06	Pk	35.4	11.8	0.00	-35.80	-38.66	-	-	-7	-31.66	43	180	H
			7.365402	-48.13	Pk	35.4	11.8	0.00	-35.62	-36.55	-	-	-21.2	-15.35	43	180	H
			7.125000	-61.02	RMS	35.4	11.8	0.00	-35.80	-49.62	-27	-22.62	-	-	43	180	H
			7.519324	-60.33	RMS	35.5	11.8	0.00	-35.25	-48.28	-41.2	-7.08	-	-	43	180	H
			7.125000	-50.70	Pk	35.4	11.8	0.00	-35.80	-39.30	-	-	-7	-32.30	307	147	V
			7.373413	-47.80	Pk	35.3	11.8	0.00	-35.57	-36.27	-	-	-21.2	-15.07	307	147	V
		16	7.125000	-61.50	RMS	35.4	11.8	0.00	-35.80	-50.10	-27	-23.10	-	-	307	147	V
			7.443957	-60.16	RMS	35.4	11.8	0.00	-35.47	-48.43	-41.2	-7.23	-	-	307	147	V
			7.125000	-48.29	Pk	35.7	11.8	0.00	-37.80	-38.59	-	-	-7	-31.59	357	231	H
			7.364390	-47.14	Pk	35.6	11.8	0.00	-37.84	-37.58	-	-	-21.2	-16.38	357	231	H
			7.125000	-60.45	RMS	35.7	11.8	0.00	-37.80	-50.75	-27	-23.75	-	-	357	231	H
			7.520180	-59.02	RMS	35.7	11.8	0.00	-37.82	-49.34	-41.2	-8.14	-	-	357	231	H
			7.125000	-50.61	Pk	35.7	11.8	0.00	-37.80	-40.91	-	-	-7	-33.91	13	177	V
			7.270123	-47.57	Pk	35.6	11.8	0.00	-37.40	-37.57	-	-	-21.2	-16.37	13	177	V
EHT80 (484+484T RU90)	7025	6	7.125000	-60.22	RMS	35.7	11.8	0.00	-37.80	-50.52	-27	-23.52	-	-	13	177	V
			7.295868	-59.03	RMS	35.6	11.8	0.00	-37.71	-49.34	-41.2	-8.14	-	-	13	177	V
			7.125000	-48.89	Pk	35.4	11.8	0.00	-35.80	-37.49	-	-	-7	-30.49	38	174	H
			* 7.485646	-47.53	Pk	35.4	11.8	0.00	-35.32	-35.65	-	-	-21.2	-14.45	38	174	H
			7.125000	-60.62	RMS	35.4	11.8	0.00	-35.80	-49.22	-27	-22.22	-	-	38	174	H
			* 7.395502	-60.22	RMS	35.4	11.8	0.00	-35.42	-48.44	-41.2	-7.24	-	-	38	174	H
			7.125000	-47.70	Pk	35.4	11.8	0.00	-35.80	-36.30	-	-	-7	-29.30	32	201	V
		16	* 7.494746	-48.67	Pk	35.5	11.8	0.00	-35.33	-36.70	-	-	-21.2	-15.50	32	201	V
			7.125000	-60.43	RMS	35.4	11.8	0.00	-35.80	-49.03	-27	-22.03	-	-	32	201	V
			* 7.501980	-60.49	RMS	35.5	11.8	0.00	-35.29	-48.48	-41.2	-7.28	-	-	32	201	V
			7.125000	-50.21	Pk	35.4	11.8	0.00	-35.80	-38.81	-	-	-7	-31.81	312	264	H
			7.502135	-48.32	Pk	35.5	11.8	0.00	-35.29	-36.31	-	-	-21.2	-15.11	312	264	H
			7.125000	-61.24	RMS	35.4	11.8	0.00	-35.80	-49.84	-27	-22.84	-	-	312	264	H
			7.517846	-60.38	RMS	35.5	11.8	0.00	-35.25	-48.33	-41.2	-7.13	-	-	312	264	H
EHT160 (996+484T RU94)	6985	6	7.125000	-50.30	Pk	35.4	11.8	0.00	-35.80	-38.90	-	-	-7	-31.90	240	292	V
			7.393557	-47.76	Pk	35.4	11.8	0.00	-35.42	-35.98	-	-	-21.2	-14.78	240	292	V
			7.125000	-61.13	RMS	35.4	11.8	0.00	-35.80	-49.73	-27	-22.73	-	-	240	292	V
			7.399391	-60.19	RMS	35.4	11.8	0.00	-35.43	-48.42	-41.2	-7.22	-	-	240	292	V
			* 7.398457	-48.26	Pk	35.7	11.8	0.00	-35.41	-36.17	-	-	-21.20	-14.97	153.00	250	H
			* 7.399002	-60.56	RMS	35.7	11.8	0.00	-35.30	-48.36	-41.20	-7.16	-	-	153.00	250	H
			7.125000	-43.20	Pk	35.7	11.8	0.00	-35.70	-31.40	-	-	-7.00	-24.4	153.00	250	H
		16	7.125000	-55.73	RMS	35.7	11.8	0.00	-35.70	-43.93	-27.00	-16.93	-	-	153.00	250	H
			* 7.364624	-48.48	Pk	35.7	11.8	0.00	-35.40	-36.38	-	-	-21.2	-15.18	65	309	V
			* 7.397057	-60.25	RMS	35.7	11.8	0.00	-35.31	-48.06	-41.2	-6.86	-	-	65	309	V
			7.125000	-43.75	Pk	35.7	11.8	0.00	-35.70	-31.95	-	-	-7	-24.95	65	309	V
			7.125000	-56.27	RMS	35.7	11.8	0.00	-35.70	-44.47	-27	-17.47	-	-	65	309	V
			7.125000	-43.88	Pk	35.7	11.8	0.00	-36.81	-33.19	-	-	-7	-26.19	261	229	H
			7.388891	-46.22	Pk	35.7	11.8	0.00	-36.69	-35.41	-	-	-21.2	-14.21	261	229	H
			7.125000	-56.77	RMS	35.7	11.8	0.00	-36.81	-46.08	-27	-19.08	-	-	261	229	H
			7.415179	-58.62	RMS	35.7	11.8	0.00	-36.63	-47.75	-41.2	-6.55	-	-	261	229	H
			7.125000	-43.62	Pk	35.7	11.8	0.00	-36.81	-32.93	-	-	-7	-25.93	25	191	V
			7.382590	-46.67	Pk	35.8	11.8	0.00	-36.71	-35.78	-	-	-21.2	-14.58	25	191	V
			7.125000	-55.35	RMS	35.7	11.8	0.00	-36.81	-44.66	-27	-17.66	-	-	25	191	V
			7.387568	-58.76	RMS	35.7	11.8	0.00	-36.68	-47.94	-41.2	-6.74	-	-	25	191	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.11. 802.11a MIMO MODE IN UNII-8 BAND – BANDEDGE

UNII-8 (MIMO CDD)	Channel Frequency MHz	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11a	7115	6+16	7.125000	-31.13	Pk	35.4	11.8	0.00	-35.80	-19.73	-	-	-7	-12.73	26	156	H
			7.125068	-30.09	Pk	35.4	11.8	0.00	-35.80	-18.69	-	-	-7	-11.69	26	156	H
			7.125000	-47.71	RMS	35.4	11.8	0.00	-35.80	-36.31	-27	-9.31	-	-	26	156	H
			7.431280	-60.14	RMS	35.5	11.8	0.00	-35.44	-48.28	-41.2	-7.08	-	-	26	156	H
			7.125000	-24.39	Pk	35.4	11.8	0.00	-35.80	-12.99	-	-	-7	-5.99	305	182	V
			7.125068	-23.80	Pk	35.4	11.8	0.00	-35.80	-12.40	-	-	-7	-5.40	305	182	V
			7.125000	-41.19	RMS	35.4	11.8	0.00	-35.80	-29.79	-27	-2.79	-	-	305	182	V
			7.125068	-43.43	RMS	35.4	11.8	0.00	-35.80	-32.03	-27	-5.03	-	-	305	182	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.12. 802.11be MIMO SU MODE IN UNII-8 BAND – BANDEDGE

UNII-8 (MIMO CDD)	Channel Frequency MHz	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (SU Mode)	7095	6+16	* 7.327213	-48.49	Pk	35.7	11.8	0.00	-35.60	-36.59	-	-	-21.2	-15.39	105	164	H
			* 7.372713	-60.27	RMS	35.7	11.8	0.00	-35.47	-48.24	-41.2	-7.04	-	-	105	164	H
			7.125000	-41.22	Pk	35.7	11.8	0.00	-35.70	-29.42	-	-	-7	-22.42	105	164	H
			7.125000	-56.61	RMS	35.7	11.8	0.00	-35.70	-44.81	-27	-17.81	-	-	105	164	H
			* 7.339968	-48.46	Pk	35.7	11.8	0.00	-35.60	-36.56	-	-	-21.2	-15.36	75	263	V
			* 7.279224	-60.39	RMS	35.7	11.8	0.00	-35.50	-48.39	-41.2	-7.19	-	-	75	263	V
			7.125000	-46.23	Pk	35.7	11.8	0.00	-35.70	-34.43	-	-	-7	-27.43	75	263	V
EHT40 (SU Mode)	7085	6+16	7.125000	-58.29	RMS	35.7	11.8	0.00	-35.70	-46.49	-27	-19.49	-	-	75	263	V
			7.125000	-33.78	Pk	35.6	11.8	0.00	-34.37	-20.75	-	-	-7	-13.75	60	229	H
			7.127712	-28.75	Pk	35.6	11.8	0.00	-34.34	-15.69	-	-	-7	-8.69	60	229	H
			7.125000	-46.71	RMS	35.6	11.8	0.00	-34.37	-33.68	-27	-6.68	-	-	60	229	H
			7.126779	-43.72	RMS	35.6	11.8	0.00	-34.35	-30.67	-27	-3.67	-	-	60	229	H
			7.125000	-30.13	Pk	35.6	11.8	0.00	-34.37	-17.10	-	-	-7	-10.10	26	164	V
			7.125456	-27.77	Pk	35.6	11.8	0.00	-34.37	-14.74	-	-	-7	-7.74	26	164	V
EHT80 (SU Mode)	7025	6+16	7.125000	-43.34	RMS	35.6	11.8	0.00	-34.37	-30.31	-27	-3.31	-	-	26	164	V
			7.125768	-42.88	RMS	35.6	11.8	0.00	-34.37	-29.85	-27	-2.85	-	-	26	164	V
			7.125000	-43.89	Pk	35.6	11.8	0.00	-33.85	-30.34	-	-	-7	-23.34	127	143	H
			* 7.506958	-49.33	Pk	35.6	11.8	0.00	-33.75	-35.68	-	-	-21.2	-14.48	127	143	H
			7.125000	-56.71	RMS	35.6	11.8	0.00	-33.85	-43.16	-27	-16.16	-	-	127	143	H
			* 7.496846	-61.34	RMS	35.6	11.8	0.00	-33.71	-47.65	-41.2	-6.45	-	-	127	143	H
			7.125000	-49.04	Pk	35.6	11.8	0.00	-33.85	-35.49	-	-	-7	-28.49	92	167	V
EHT160 (SU Mode)	6985	6+16	* 7.476391	-49.24	Pk	35.6	11.8	0.00	-33.81	-35.65	-	-	-21.2	-14.45	92	167	V
			7.125000	-59.90	RMS	35.6	11.8	0.00	-33.85	-46.35	-27	-19.35	-	-	92	167	V
			* 7.512091	-61.23	RMS	35.6	11.8	0.00	-33.72	-47.55	-41.2	-6.35	-	-	92	167	V
			7.125000	-31.26	Pk	35.7	11.8	0.00	-37.88	-21.64	-	-	-7	-14.64	232	180	H
			7.125690	-26.18	Pk	35.7	11.8	0.00	-37.88	-16.56	-	-	-7	-9.56	232	180	H
			7.125000	-42.03	RMS	35.7	11.8	0.14	-37.88	-32.27	-27	-5.27	-	-	232	180	H
			7.126312	-40.26	RMS	35.7	11.8	0.14	-37.88	-30.50	-27	-3.50	-	-	232	180	H
			7.125000	-30.74	Pk	35.7	11.8	0.00	-37.88	-21.12	-	-	-7	-14.12	138	312	V
			7.130512	-28.66	Pk	35.7	11.8	0.00	-37.91	-19.07	-	-	-7	-12.07	138	312	V
			7.125000	-42.28	RMS	35.7	11.8	0.14	-37.88	-32.52	-27	-5.52	-	-	138	312	V
			7.125145	-41.10	RMS	35.7	11.8	0.14	-37.88	-31.34	-27	-4.34	-	-	138	312	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection


1.1.13. 802.11be MIMO PARTIAL RU MODE IN UNII-8 BAND – BANDEDGE

UNII-8 (MIMO CDD)	Channel Frequency MHz	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (26T RU8)	7095	6+16	7.125000	-62.64	Pk	35.7	11.8	0.00	-22.76	-37.90	-	-	-7	-30.90	93	112	H
			* 7.462702	-61.60	Pk	35.7	11.8	0.00	-22.14	-36.24	-	-	-21.2	-15.04	93	112	H
			7.125000	-74.03	RMS	35.7	11.8	0.00	-22.76	-49.29	-27	-22.29	-	-	93	112	H
			* 7.483780	-73.55	RMS	35.7	11.8	0.00	-22.16	-48.21	-41.2	-7.01	-	-	93	112	H
			7.125000	-63.15	Pk	35.7	11.8	0.00	-22.76	-38.41	-	-	-7	-31.41	2	131	V
			* 7.469469	-61.41	Pk	35.7	11.8	0.00	-22.13	-36.04	-	-	-21.2	-14.84	2	131	V
			7.125000	-73.78	RMS	35.7	11.8	0.00	-22.76	-49.04	-27	-22.04	-	-	2	131	V
			* 7.479346	-73.53	RMS	35.7	11.8	0.00	-22.19	-48.22	-41.2	-7.02	-	-	2	131	V
			7.125000	-62.87	Pk	35.7	11.8	0.00	-22.76	-38.13	-	-	-7	-31.13	93	112	H
			* 7.512791	-61.34	Pk	35.7	11.8	0.00	-22.15	-35.99	-	-	-21.2	-14.79	93	112	H
EHT20 (52+26T RU72)	7095	6+16	7.125000	-74.12	RMS	35.7	11.8	0.00	-22.76	-49.38	-27	-22.38	-	-	93	112	H
			* 7.519635	-73.36	RMS	35.7	11.8	0.00	-22.13	-47.99	-41.2	-6.79	-	-	93	112	H
			7.125000	-62.89	Pk	35.7	11.8	0.00	-22.76	-38.15	-	-	-7	-31.15	2	131	V
			* 7.402424	-60.22	Pk	35.6	11.8	0.00	-22.27	-35.09	-	-	-21.2	-13.89	2	131	V
			7.125000	-74.17	RMS	35.7	11.8	0.00	-22.76	-49.43	-27	-22.43	-	-	2	131	V
			* 7.508358	-73.58	RMS	35.7	11.8	0.00	-22.16	-48.24	-41.2	-7.04	-	-	2	131	V
			7.125000	-47.66	Pk	35.6	11.8	0.00	-33.85	-34.11	-	-	-7	-27.11	154	253	H
			* 7.343935	-48.90	Pk	35.6	11.8	0.00	-33.97	-35.47	-	-	-21.2	-14.27	154	253	H
			7.125000	-61.84	RMS	35.6	11.8	0.00	-33.85	-48.29	-27	-21.29	-	-	154	253	H
			* 7.512791	-61.20	RMS	35.6	11.8	0.00	-33.70	-47.50	-41.2	-6.30	-	-	154	253	H
EHT80 (484+242T RU90)	7025	6+16	7.125000	-47.77	Pk	35.6	11.8	0.00	-33.85	-34.22	-	-	-7	-27.22	12	251	V
			* 7.390135	-48.55	Pk	35.6	11.8	0.00	-33.90	-35.05	-	-	-21.2	-13.85	12	251	V
			7.125000	-61.59	RMS	35.6	11.8	0.00	-33.85	-48.04	-27	-21.04	-	-	12	251	V
			* 7.490313	-61.25	RMS	35.6	11.8	0.00	-33.75	-47.60	-41.2	-6.40	-	-	12	251	V
EHT160 (996+484T RU94)	6985	6+16	7.125000	-48.71	Pk	35.4	11.8	0.00	-35.80	-37.31	-	-	-7	-30.31	318	135	H
			7.379790	-48.41	Pk	35.3	11.8	0.00	-35.51	-36.82	-	-	-21.2	-15.62	318	135	H
			7.125000	-59.86	RMS	35.4	11.8	0.00	-35.80	-48.46	-27	-21.46	-	-	318	135	H
			7.410279	-60.20	RMS	35.4	11.8	0.00	-35.41	-48.41	-41.2	-7.21	-	-	318	135	H
			7.125000	-47.81	Pk	35.4	11.8	0.00	-35.80	-36.41	-	-	-7	-29.41	21	210	V
			7.506335	-47.73	Pk	35.5	11.8	0.00	-35.32	-35.75	-	-	-21.2	-14.55	21	210	V
			7.125000	-59.55	RMS	35.4	11.8	0.00	-35.80	-48.15	-27	-21.15	-	-	21	210	V
			7.522980	-60.48	RMS	35.5	11.8	0.00	-35.26	-48.44	-41.2	-7.24	-	-	21	210	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

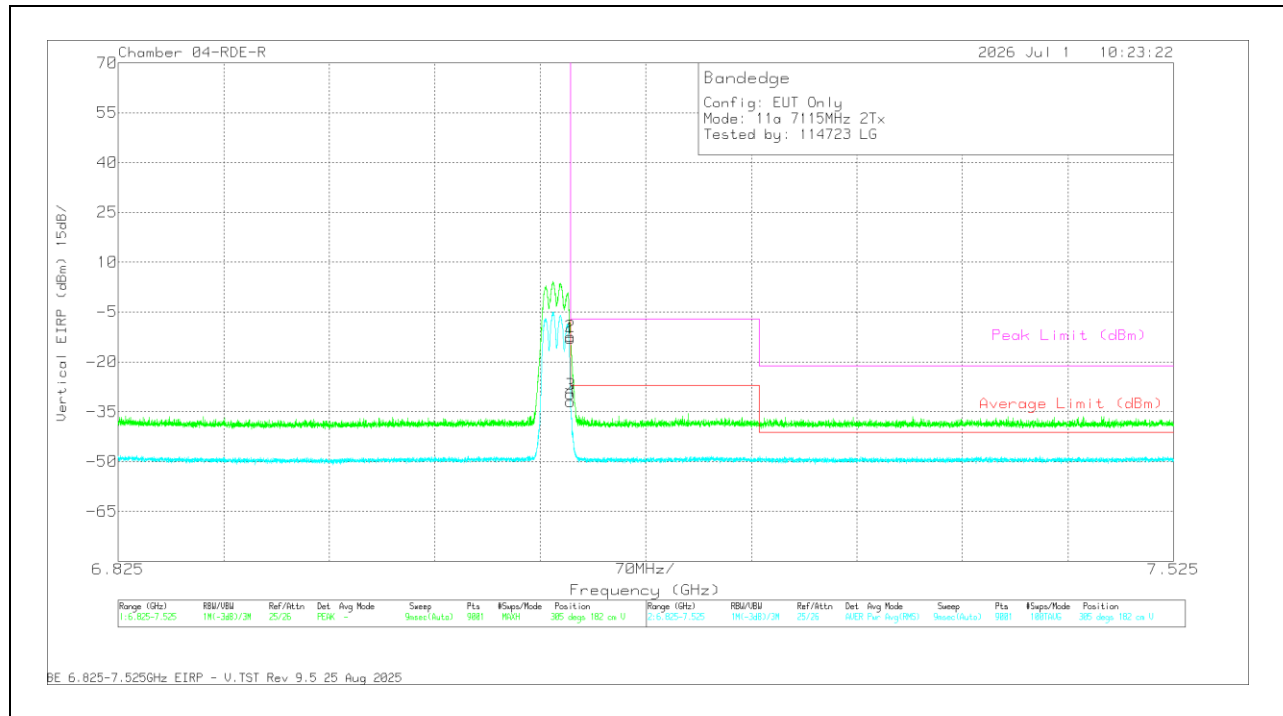WORST-CASE BANDEDGE (HIGH CHANNEL)**802.11a / 233 & 7115MHz / 2Tx CDD:****VERTICAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	80430 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.125	-24.39	PK	35.4	11.8	0	-35.8	-12.99	-	-	-7	-5.99	305	182	V
2	7.125068	-23.8	PK	35.4	11.8	0	-35.8	-12.4	-	-	-7	-5.4	305	182	V
3	7.125	-41.19	RMS	35.4	11.8	0	-35.8	-29.79	-27	-2.79	-	-	305	182	V
4	7.125068	-43.43	RMS	35.4	11.8	0	-35.8	-32.03	-27	-5.03	-	-	305	182	V

PK - Peak detector
RMS - RMS detection

1.1.14. 802.11a MIMO MODE IN UNII-8 BAND – SPURIOUS EMISSIONS**20MHz**

UNII-8 (MIMO CDD)	Channel Frequency MHz	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det.	AF (dB/m)	DCCF (dB)	Amp/Cbt/ Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11a	7115	6+16	* 2.353384	43.09	PK-U	31.8	0.00	-26.52	48.37	-	-	74	-25.63	0	100	H
			* 2.359535	31.48	ADR	31.9	0.00	-26.61	36.77	54	-17.23	-	-	0	100	H
			* 2.376145	31.53	ADR	32.0	0.00	-26.71	36.82	54	-17.18	-	-	0	201	V
			* 2.383096	43.35	PK-U	32.0	0.00	-26.59	48.76	-	-	74	-25.24	0	201	V
			* 3.545258	42.98	PK-U	33.2	0.00	-25.46	50.72	-	-	88.2	-37.48	0	100	H
			* 3.546555	31.11	ADR	33.2	0.00	-25.48	38.83	68.2	-29.37	-	-	0	100	H
			* 3.556143	30.97	ADR	33.2	0.00	-25.42	38.75	68.2	-29.45	-	-	0	200	V
			* 3.574250	43.88	PK-U	33.2	0.00	-25.50	51.58	-	-	88.2	-36.62	0	200	V
			14.218873	44.51	ADR	39.2	0.00	-44.06	39.65	68.2	-28.55	-	-	0	100	H
			14.229986	56.10	PK-U	39.2	0.00	-44.17	51.13	-	-	88.2	-37.07	0	201	V
			14.243769	56.53	PK-U	39.2	0.00	-44.03	51.70	-	-	88.2	-36.5	0	100	H
			14.247157	44.40	ADR	39.2	0.00	-43.95	39.65	68.2	-28.55	-	-	0	201	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.1.15. 802.11be MIMO MODE IN UNII-8 BAND – SPURIOUS EMISSIONS**20MHz**

UNII-8 (MIMO CDD)	Channel Frequency MHz	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbt/ Filt/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (SU Mode)	6895	6+16	* 1.690761	58.50	PK-U	29.0	0.00	-47.71	39.79	-	-	74	-34.21	360	101	H
			* 1.701276	46.80	ADR	29.2	0.00	-47.76	28.24	54	-25.76	-	-	360	101	H
			* 1.703334	46.93	ADR	29.2	0.00	-47.76	28.37	54	-25.63	-	-	360	200	V
			* 1.705298	58.94	PK-U	29.2	0.00	-47.74	40.40	-	-	74	-33.6	360	200	V
			* 2.368283	46.68	ADR	32.2	0.00	-47.50	31.38	54	-22.62	-	-	360	101	V
			* 2.369915	46.57	ADR	32.2	0.00	-47.51	31.26	54	-22.74	-	-	360	101	H
			* 2.382192	58.04	PK-U	32.3	0.00	-47.43	42.91	-	-	74	-31.09	360	101	V
			* 2.389157	58.49	PK-U	32.3	0.00	-47.36	43.43	-	-	74	-30.57	360	101	H
			14.514951	43.63	ADR	39.5	0.00	-43.01	40.12	68.2	-28.08	-	-	360	101	V
			14.530773	43.49	ADR	39.5	0.00	-42.90	40.09	68.2	-28.11	-	-	360	101	H
			14.531425	55.34	PK-U	39.5	0.00	-42.90	51.94	-	-	88.2	-36.26	360	101	V
			14.537340	55.12	PK-U	39.5	0.00	-42.83	51.79	-	-	88.2	-36.41	360	101	H
			* 1.697838	46.89	ADR	29.1	0.00	-47.77	28.22	54	-25.78	-	-	360	200	V
			* 1.700069	46.84	ADR	29.2	0.00	-47.76	28.28	54	-25.72	-	-	360	200	H
			* 1.702504	58.66	PK-U	29.2	0.00	-47.76	40.10	-	-	74	-33.9	360	200	H
	6995	6+16	* 1.704509	59.20	PK-U	29.2	0.00	-47.74	40.66	-	-	74	-33.34	360	200	V
			* 2.320310	57.83	PK-U	32.1	0.00	-47.56	42.37	-	-	74	-31.63	360	101	V
			* 2.320359	46.42	ADR	32.1	0.00	-47.56	30.96	54	-23.04	-	-	360	101	V
			* 2.321138	46.35	ADR	32.1	0.00	-47.55	30.90	54	-23.1	-	-	360	200	H
			* 2.350917	58.08	PK-U	32.2	0.00	-47.47	42.81	-	-	74	-31.19	360	200	H
			14.554921	43.40	ADR	39.5	0.00	-42.68	40.22	68.2	-27.98	-	-	360	200	V
			14.556037	55.32	PK-U	39.5	0.00	-42.66	52.16	-	-	88.2	-36.04	360	101	H
			14.561764	55.19	PK-U	39.5	0.00	-42.72	51.97	-	-	88.2	-36.23	360	200	V
			14.587986	43.62	ADR	39.5	0.00	-42.74	40.38	68.2	-27.82	-	-	360	101	H
			* 1.597842	46.11	ADR	27.9	0.00	-47.36	26.65	54	-27.35	-	-	360	101	H
			* 1.599837	58.41	PK-U	28.0	0.00	-47.37	39.04	-	-	74	-34.96	360	101	H
			* 1.609050	46.09	ADR	28.0	0.00	-47.46	26.63	54	-27.37	-	-	360	200	V
			* 1.613223	58.01	PK-U	28.0	0.00	-47.47	38.54	-	-	74	-35.46	360	200	V
			* 14.496199	55.14	PK-U	39.5	0.00	-42.90	51.74	-	-	74	-22.26	360	200	H
	7095	6+16	* 2.328014	46.43	ADR	32.1	0.00	-47.49	31.04	54	-22.96	-	-	360	200	H
			* 2.350313	57.85	PK-U	32.2	0.00	-47.47	42.58	-	-	74	-31.42	360	101	V
			* 2.350340	57.82	PK-U	32.2	0.00	-47.47	42.55	-	-	74	-31.45	360	200	H
			* 2.362822	46.62	ADR	32.2	0.00	-47.49	31.33	54	-22.67	-	-	360	101	V
			14.504930	43.32	ADR	39.5	0.00	-43.02	39.80	68.2	-28.4	-	-	360	200	H
			14.512769	43.40	ADR	39.5	0.00	-43.04	39.86	68.2	-28.34	-	-	360	101	V
			14.513865	55.27	PK-U	39.5	0.00	-43.01	51.76	-	-	88.2	-36.44	360	101	V
			* 1.695817	58.68	PK-U	29.1	0.00	-47.75	40.03	-	-	74	-33.97	360	101	H
			* 1.699437	58.40	PK-U	29.2	0.00	-47.76	39.84	-	-	74	-34.16	360	101	V
			* 1.704149	47.03	ADR	29.2	0.00	-47.75	28.48	54	-25.52	-	-	360	101	H
			* 1.705343	46.91	ADR	29.2	0.00	-47.74	28.37	54	-25.63	-	-	360	101	V
			* 14.482417	55.35	PK-U	39.5	0.00	-42.47	52.38	-	-	74	-21.62	360	101	H
			* 2.486154	58.41	PK-U	32.4	0.00	-47.05	43.76	-	-	74	-30.24	360	200	H
			14.505698	43.68	ADR	39.5	0.00	-43.00	40.18	68.2	-28.02	-	-	360	101	H
	EHT20 (26T RU0)	6+16	14.505698	43.47	ADR	39.5	0.00	-43.00	39.97	68.2	-28.23	-	-	360	101	V
			14.515633	55.14	PK-U	39.5	0.00	-43.00	51.64	-	-	88.2	-36.56	360	101	V
			2.468103	58.18	PK-U	32.4	0.00	-47.05	43.53	-	-	88.2	-44.67	360	200	V
			2.477564	46.08	ADR	32.4	0.00	-47.06	31.42	68.2	-36.78	-	-	360	200	H
			2.478355	46.08	ADR	32.4	0.00	-47.07	31.41	68.2	-36.79	-	-	360	200	V
			* 1.522443	46.58	ADR	27.8	0.00	-47.31	27.07	54	-26.93	-	-	360	101	H
			* 1.522599	57.97	PK-U	27.8	0.00	-47.31	38.46	-	-	74	-35.54	360	101	H
			* 1.524402	46.61	ADR	27.8	0.00	-47.29	27.12	54	-26.88	-	-	360	200	V
			* 1.561353	58.10	PK-U	27.8	0.00	-47.34	38.56	-	-	74	-35.44	360	200	V
			* 14.480788	43.34	ADR	39.5	0.00	-42.39	40.45	54	-13.55	-	-	360	101	H
			* 14.483923	54.96	PK-U	39.5	0.00	-42.49	51.97	-	-	74	-22.03	360	101	V
			* 14.491511	43.31	ADR	39.5	0.00	-42.77	40.04	54	-13.96	-	-	360	101	V
			* 2.312562	58.35	PK-U	32.1	0.00	-47.61	42.84	-	-	74	-31.16	360	101	H
			* 2.316011	46.65	ADR	32.1	0.00	-47.59	31.16	54	-22.84	-	-	360	101	V
	EHT20 (26T RU4)	6+16	14.456454	55.49	PK-U	39.4	0.00	-42.12	52.77	-	-	88.2	-35.43	360	101	H
			2.303972	58.45	PK-U	32.1	0.00	-47.62	42.93	-	-	88.2	-45.27	360	101	V
			2.305274	46.81	ADR	32.1	0.00	-47.61	31.30	68.2	-36.9	-	-	360	101	H
			* 1.562359	58.33	PK-U	27.8	0.00	-47.35	38.78	-	-	74	-35.22	360	101	V
			* 1.565374	46.21	ADR	27.8	0.00	-47.33	26.68	54	-27.32	-	-	360	199	H
			* 1.566885	57.69	PK-U	27.8	0.00	-47.32	38.17	-	-	74	-35.83	360	199	H
			* 1.575398	46.07	ADR	27.8	0.00	-47.31	26.56	54	-27.44	-	-	360	101	V
			14.603495	54.85	PK-U	39.5	0.00	-42.62	51.73	-	-	88.2	-36.47	360	200	V
			14.605035	43.11	ADR	39.5	0.00	-42.60	40.01	68.2	-28.19	-	-	360	200	V
			14.614038	43.14	ADR	39.6	0.00	-42.40	40.34	68.2	-27.86	-	-	360	101	H
			14.626664	54.76	PK-U	39.6	0.00	-42.39	51.97	-	-	88.2	-36.23	360	101	H
			2.401659	76.10	PK-U	32.3	0.00	-47.30	61.10	-	-	88.2	-27.1	360	101	H
			2.401726	50.59	ADR	32.3	0.00	-47.30	35.59	68.2	-32.61	-	-	360	101	H
			2.402008	70.09	PK-U	32.3	0.00	-47.30	55.09	-	-	88.2	-33.11	360	101	V
	EHT20 (26T RU8)	6+16	2.402008	51.79	ADR	32.3	0.00	-47.30	36.79	68.2	-31.41	-	-	360	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

20MHz (cont.)

UNII-8 (MIMO CDD)	Channel Frequency MHz	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbt/ Filt/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (52+26T RU70)	6895	6+16	* 11.523359	56.71	PK-U	38.4	0.00	-44.85	50.26	-	-	74	-23.74	13	395	H
			* 11.526145	56.06	PK-U	38.4	0.00	-44.84	49.62	-	-	74	-24.38	294	199	V
			* 11.527798	43.94	ADR	38.4	0.00	-44.83	37.51	54	-16.49	-	-	294	199	V
			* 11.532225	44.66	ADR	38.4	0.00	-44.74	38.32	54	-15.68	-	-	13	395	H
			* 9.041932	44.89	ADR	36.4	0.00	-45.48	35.81	54	-18.19	-	-	358	326	H
			* 9.04477	56.53	PK-U	36.4	0.00	-45.47	47.46	-	-	74	-26.54	358	326	H
			* 9.054787	44.50	ADR	36.4	0.00	-45.32	35.58	54	-18.42	-	-	3	201	V
			* 9.057685	56.88	PK-U	36.4	0.00	-45.35	47.93	-	-	74	-26.07	3	201	V
			16.394809	56.01	PK-U	40.4	0.00	-43.19	53.22	-	-	88.2	-34.98	3	136	H
			16.421137	43.82	ADR	40.4	0.00	-43.12	41.10	68.2	-27.1	-	-	358	148	V
			16.422527	55.47	PK-U	40.4	0.00	-43.20	52.67	-	-	88.2	-35.53	358	148	V
			16.425566	44.06	ADR	40.4	0.00	-43.19	41.27	68.2	-26.93	-	-	3	136	H
			* 11.521146	55.63	PK-U	38.4	0.00	-44.83	49.20	-	-	74	-24.8	360	211	H
EHT20 (52+26T RU71)	6995	6+16	* 11.53186	56.80	PK-U	38.4	0.00	-44.75	50.45	-	-	74	-23.55	274	366	V
			* 11.546635	45.12	ADR	38.4	0.00	-44.62	38.90	54	-15.1	-	-	274	366	V
			* 11.553702	44.18	ADR	38.4	0.00	-44.60	37.98	54	-16.02	-	-	360	211	H
			* 15.517179	43.87	ADR	40.1	0.00	-43.38	40.59	54	-13.41	-	-	6	292	H
			* 15.537471	43.92	ADR	40.2	0.00	-43.31	40.81	54	-13.19	-	-	63	110	V
			* 15.539811	55.71	PK-U	40.2	0.00	-43.34	52.57	-	-	74	-21.43	6	292	H
			* 15.544365	55.36	PK-U	40.2	0.00	-43.40	52.16	-	-	74	-21.84	63	110	V
			* 9.335201	44.25	ADR	36.6	0.00	-45.23	35.62	54	-18.38	-	-	44	186	H
			* 9.340316	44.09	ADR	36.6	0.00	-45.20	35.49	54	-18.51	-	-	360	155	V
			* 9.348917	55.81	PK-U	36.6	0.00	-45.16	47.25	-	-	74	-26.75	44	186	H
			* 9.360844	55.98	PK-U	36.6	0.00	-45.18	47.40	-	-	74	-26.6	360	155	V
			* 11.537406	56.47	PK-U	38.4	0.00	-44.76	50.11	-	-	74	-23.89	356	395	H
			* 11.556206	44.91	ADR	38.4	0.00	-44.64	38.67	54	-15.33	-	-	356	395	H
EHT20 (52+26T RU72)	8095	6+16	* 11.556018	57.19	PK-U	38.4	0.00	-44.64	50.95	-	-	74	-23.05	25	384	V
			* 11.571818	44.85	ADR	38.4	0.00	-44.77	38.48	54	-15.52	-	-	25	384	V
			9.231759	45.14	ADR	36.4	0.00	-45.58	35.96	68.2	-32.24	-	-	295	233	V
			9.232955	56.85	PK-U	36.4	0.00	-45.61	47.64	-	-	88.2	-40.56	295	233	V
			9.234283	57.69	PK-U	36.4	0.00	-45.61	48.48	-	-	88.2	-39.72	56	391	H
			9.237977	45.85	ADR	36.5	0.00	-45.60	36.75	68.2	-31.45	-	-	56	391	H
			15.101648	44.53	ADR	39.9	0.00	-43.91	40.52	68.2	-27.68	-	-	246	142	V
			15.109828	44.99	ADR	39.9	0.00	-44.02	40.87	68.2	-27.33	-	-	11	382	H
			15.112875	56.52	PK-U	39.9	0.00	-44.06	52.36	-	-	88.2	-35.84	11	382	H
			15.123045	57.11	PK-U	39.9	0.00	-44.14	52.87	-	-	88.2	-35.33	246	142	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

40MHz

UNII-8 (MIMO CDD)	Channel Frequency MHz	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbt/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT40 (SU Mode)	6885	6+16	* 1.696869	47.00	ADR	29.1	0.00	-47.76	28.34	54	-25.66	-	-	360	200	V
			* 1.700147	58.84	PK-U	29.2	0.00	-47.76	40.28	-	-	74	-33.72	360	101	H
			* 1.700600	47.16	ADR	29.2	0.00	-47.75	28.61	54	-25.39	-	-	360	101	H
			* 1.701567	58.89	PK-U	29.2	0.00	-47.76	40.33	-	-	74	-33.67	360	200	V
			* 2.743348	56.99	PK-U	32.4	0.00	-46.52	42.87	-	-	74	-31.13	360	101	V
			* 2.747485	45.39	ADR	32.4	0.00	-46.49	31.30	54	-22.7	-	-	360	101	H
			* 2.749831	57.08	PK-U	32.4	0.00	-46.51	42.97	-	-	74	-31.03	360	101	H
			* 2.756996	45.37	ADR	32.4	0.00	-46.48	31.29	54	-22.71	-	-	360	101	V
			14.578023	43.27	ADR	39.5	0.00	-42.71	40.06	68.2	-28.14	-	-	360	199	H
			14.579195	43.40	ADR	39.5	0.00	-42.79	40.11	68.2	-28.09	-	-	360	101	V
			14.579783	54.80	PK-U	39.5	0.00	-42.83	51.47	-	-	88.2	-36.73	360	199	H
			14.587726	54.74	PK-U	39.5	0.00	-42.76	51.48	-	-	88.2	-36.72	360	101	V
	6965	6+16	* 1.697686	58.61	PK-U	29.1	0.00	-47.77	39.94	-	-	74	-34.06	360	101	V
			* 1.701233	47.01	ADR	29.2	0.00	-47.75	28.46	54	-25.54	-	-	360	101	V
			* 1.702124	47.02	ADR	29.2	0.00	-47.77	28.45	54	-25.55	-	-	360	101	H
			* 1.705835	58.61	PK-U	29.3	0.00	-47.73	40.18	-	-	74	-33.82	360	101	H
			* 14.494186	54.64	PK-U	39.5	0.00	-42.84	51.30	-	-	74	-22.7	360	200	V
			* 2.312084	46.83	ADR	32.1	0.00	-47.61	31.32	54	-22.68	-	-	360	101	H
			* 2.313382	58.29	PK-U	32.1	0.00	-47.61	42.78	-	-	74	-31.22	360	101	H
			* 2.358124	58.52	PK-U	32.2	0.00	-47.49	43.23	-	-	74	-30.77	360	200	V
			* 2.361314	46.55	ADR	32.2	0.00	-47.49	31.26	54	-22.74	-	-	360	200	V
			14.502391	54.62	PK-U	39.5	0.00	-42.95	51.17	-	-	88.2	-37.03	360	200	H
			14.511634	43.30	ADR	39.5	0.00	-42.98	39.82	68.2	-28.38	-	-	360	200	H
			14.520248	43.47	ADR	39.5	0.00	-42.97	40.00	68.2	-28.2	-	-	360	200	V
	7085	6+16	* 2.361989	61.21	PK-U	32.1	0.00	-49.10	44.21	-	-	74	-29.79	360	200	H
			* 2.355265	49.70	ADR	32.1	0.00	-49.20	32.60	54	-21.4	-	-	360	200	H
			* 3.538535	57.67	PK-U	33.0	0.00	-46.65	44.02	-	-	88.2	-44.18	360	101	H
			* 3.559751	45.72	ADR	32.9	0.00	-46.80	31.82	68.2	-36.38	-	-	360	101	H
			* 2.342170	62.71	PK-U	32.0	0.00	-49.32	45.39	-	-	74	-28.61	360	101	V
			* 2.345156	49.81	ADR	32.0	0.00	-49.30	32.51	54	-21.49	-	-	360	101	V
			* 3.557844	57.30	PK-U	32.9	0.00	-46.78	43.42	-	-	88.2	-44.78	360	101	V
			* 3.551040	45.60	ADR	32.9	0.00	-46.70	31.80	68.2	-36.4	-	-	360	101	V
			14.186690	55.17	PK-U	38.9	0.00	-41.80	52.27	-	-	88.2	-35.93	360	200	V
			14.193733	43.03	ADR	38.9	0.00	-41.73	40.20	68.2	-28	-	-	360	101	H
			14.193890	43.15	ADR	38.9	0.00	-41.71	40.34	68.2	-27.86	-	-	360	200	V
			14.196389	54.55	PK-U	38.9	0.00	-41.70	51.75	-	-	88.2	-36.45	360	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

80MHz

UNII-8 (MIMO CDD)	Channel Frequency MHz	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbt/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT80 (SU Mode)	6945	6+16	* 3.684878	51.83	PK-U	33.1	0.00	-41.90	43.03	-	-	74	-30.97	360	200	H
			* 3.685225	40.49	ADR	33.1	0.00	-41.90	31.69	54	-22.31	-	-	360	200	H
			* 3.680764	52.08	PK-U	33.1	0.00	-41.90	43.28	-	-	74	-30.72	360	200	V
			* 3.692829	40.39	ADR	33.1	0.00	-41.90	31.59	54	-22.41	-	-	360	200	V
			2.157688	56.55	PK-U	31.5	0.00	-45.20	42.85	-	-	88.2	-45.35	360	200	V
			2.159306	44.55	ADR	31.5	0.00	-45.20	30.85	68.2	-37.35	-	-	360	200	H
			2.163030	44.66	ADR	31.5	0.00	-45.30	30.86	68.2	-37.34	-	-	360	200	V
			2.167172	55.89	PK-U	31.6	0.00	-45.30	42.19	-	-	88.2	-46.01	360	200	H
			13.878689	46.14	PK-U	38.7	0.00	-35.00	49.84	-	-	88.2	-38.36	360	200	V
			13.879041	34.59	ADR	38.7	0.00	-35.00	38.29	68.2	-29.91	-	-	360	200	V
	7025	6+16	13.887409	46.45	PK-U	38.6	0.00	-35.10	49.95	-	-	88.2	-38.25	360	200	H
			13.897964	34.76	ADR	38.7	0.00	-35.10	38.36	68.2	-29.84	-	-	360	200	H
			* 3.579762	52.26	PK-U	32.7	0.00	-41.80	43.16	-	-	88.2	-45.04	360	199	H
			* 3.570016	40.51	ADR	32.7	0.00	-41.90	31.31	68.2	-36.89	-	-	360	199	H
			* 3.574651	52.05	PK-U	32.7	0.00	-41.80	42.95	-	-	88.2	-45.25	360	199	V
			* 3.568443	40.52	ADR	32.7	0.00	-41.90	31.32	68.2	-36.88	-	-	360	199	V
			2.398040	43.61	ADR	32.4	0.00	-44.60	31.41	68.2	-36.79	-	-	360	199	H
			2.404208	55.73	PK-U	32.4	0.00	-44.60	43.53	-	-	88.2	-44.67	360	199	H
			2.411007	43.31	ADR	32.5	0.00	-44.50	31.31	68.2	-36.89	-	-	360	101	V
			2.417655	55.16	PK-U	32.4	0.00	-44.50	43.06	-	-	88.2	-45.14	360	101	V
EHT80 (484+242T RU90)	7025	6+16	14.025972	35.08	ADR	38.8	0.00	-35.10	38.78	68.2	-29.42	-	-	360	101	V
			14.052898	47.88	PK-U	38.7	0.00	-35.10	51.48	-	-	88.2	-36.72	360	199	H
			14.055760	46.97	PK-U	38.8	0.00	-35.10	50.67	-	-	88.2	-37.53	360	101	V
			14.076314	35.58	ADR	38.8	0.00	-35.20	39.18	68.2	-29.02	-	-	360	199	H
			* 3.335446	31.11	ADR	32.9	0.00	-25.67	38.34	54	-15.66	-	-	360	100	H
			* 3.35513	42.96	PK-U	32.9	0.00	-25.59	50.27	-	-	74	-23.73	360	201	V
			* 10.678225	56.44	PK-U	37.6	0.00	-45.3	48.74	-	-	74	-25.26	360	100	H
			* 10.690224	44.99	ADR	37.7	0.00	-45.24	37.45	54	-16.55	-	-	360	100	H
			* 15.517486	55.97	PK-U	40.1	0.00	-43.38	52.69	-	-	74	-21.31	360	100	H
			* 15.51986	43.86	ADR	40.2	0.00	-43.4	40.66	54	-13.34	-	-	360	100	H
			* 10.674376	56.44	PK-U	37.6	0.00	-45.21	48.83	-	-	74	-25.17	360	201	V
			* 10.676096	44.99	ADR	37.6	0.00	-45.25	37.34	54	-16.66	-	-	360	201	V
			* 15.511897	55.49	PK-U	40.1	0.00	-43.43	52.16	-	-	74	-21.84	360	200	V
			* 15.515778	43.97	ADR	40.1	0.00	-43.42	40.65	54	-13.35	-	-	360	200	V
EHT80 (484+242T RU93)	6945	6+16	3.322147	31.14	ADR	32.9	0.00	-25.68	38.36	68.2	-29.84	-	-	360	201	V
			3.343385	43.04	PK-U	32.9	0.00	-25.6	50.34	-	-	88.2	-37.86	360	100	H
			2.580397	58.97	PK-U	32.4	0.00	-48.59	42.78	-	-	88.2	-45.42	360	200	H
			2.585537	47.63	ADR	32.4	0.00	-48.61	31.42	68.2	-36.78	-	-	360	200	V
			2.594538	47.30	ADR	32.4	0.00	-48.73	30.97	68.2	-37.23	-	-	360	200	H
			2.611627	59.08	PK-U	32.4	0.00	-48.74	42.74	-	-	88.2	-45.46	360	200	V
			13.709919	44.65	ADR	39.5	0.00	-43.55	40.60	68.2	-27.6	-	-	360	101	H
			13.712847	44.67	ADR	39.5	0.00	-43.42	40.75	68.2	-27.45	-	-	360	101	V
			13.713687	56.60	PK-U	39.5	0.00	-43.37	52.73	-	-	88.2	-35.47	360	101	V
			13.720762	56.48	PK-U	39.5	0.00	-43.19	52.79	-	-	88.2	-35.41	360	101	H
			15.162242	45.18	ADR	39.6	0.00	-42.18	42.60	68.2	-25.6	-	-	360	101	H
			15.165581	57.29	PK-U	39.6	0.00	-42.26	54.63	-	-	88.2	-33.57	360	199	V
			15.168885	56.70	PK-U	39.6	0.00	-42.40	53.90	-	-	88.2	-34.3	360	101	H
			15.178120	45.24	ADR	39.6	0.00	-42.82	42.02	68.2	-26.18	-	-	360	199	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average



160MHz

UNII-8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/Filtr /Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	6985	6+16	* 1.265990	58.67	PK-U	29.2	-46.3	0.00	41.57	-	-	88.2	-46.63	360	101	V
			* 1.267235	57.73	PK-U	29.3	-46.3	0.00	40.73	-	-	88.2	-47.47	360	199	H
			* 1.267746	46.4	ADR	29.3	-46.3	0.00	29.4	68.2	-38.8	-	-	360	101	V
			* 1.268821	46.5	ADR	29.3	-46.3	0.00	29.5	68.2	-38.7	-	-	360	199	H
			13.949975	46.55	PK-U	38.7	-35.2	0.00	50.05	-	-	88.2	-38.15	360	200	V
			13.96988	47.1	PK-U	38.7	-35.2	0.00	50.6	-	-	88.2	-37.6	360	101	H
			13.97607	35.52	ADR	38.7	-35.2	0.00	39.02	68.2	-29.18	-	-	360	200	V
			13.985803	35.15	ADR	38.7	-35.2	0.00	38.65	68.2	-29.55	-	-	360	101	H
			2.397177	55.88	PK-U	32.4	-44.6	0.00	43.68	-	-	88.2	-44.52	360	199	H
			2.400949	55.71	PK-U	32.4	-44.6	0.00	43.51	-	-	88.2	-44.69	360	200	V
			2.402967	43.63	ADR	32.4	-44.6	0.00	31.43	68.2	-36.77	-	-	360	200	V
			2.403541	43.93	ADR	32.4	-44.6	0.00	31.73	68.2	-36.47	-	-	360	199	H
EHT160 (996+484T S95)	6985	6+16	* 12.324144	43.83	ADR	38.9	-42.98	0.00	39.75	54	-14.25	-	-	360	101	H
			* 12.327644	43.88	ADR	38.9	-42.91	0.00	39.87	54	-14.13	-	-	360	200	V
			* 12.329664	56.06	PK-U	38.9	-42.88	0.00	52.08	-	-	74	-21.92	360	101	H
			* 12.35189	55.84	PK-U	38.9	-41.94	0.00	52.8	-	-	74	-21.2	360	200	V
			* 2.671016	59.5	PK-U	32.4	-48.66	0.00	43.24	-	-	88.2	-44.96	360	198	H
			* 2.686277	59.81	PK-U	32.4	-48.59	0.00	43.62	-	-	88.2	-44.58	360	198	V
			* 2.687965	47.46	ADR	32.4	-48.61	0.00	31.25	68.2	-36.95	-	-	360	198	H
			* 2.693049	47.6	ADR	32.4	-48.60	0.00	31.4	54	-22.6	-	-	360	198	V
			10.534474	44.23	ADR	37.7	-43.75	0.00	38.18	68.2	-30.02	-	-	360	200	H
			10.539606	55.9	PK-U	37.7	-43.53	0.00	50.07	-	-	88.2	-38.13	360	200	H
			10.546877	44.35	ADR	37.7	-43.37	0.00	38.68	68.2	-29.52	-	-	360	101	V
			10.559392	56.35	PK-U	37.7	-43.16	0.00	50.89	-	-	88.2	-37.31	360	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

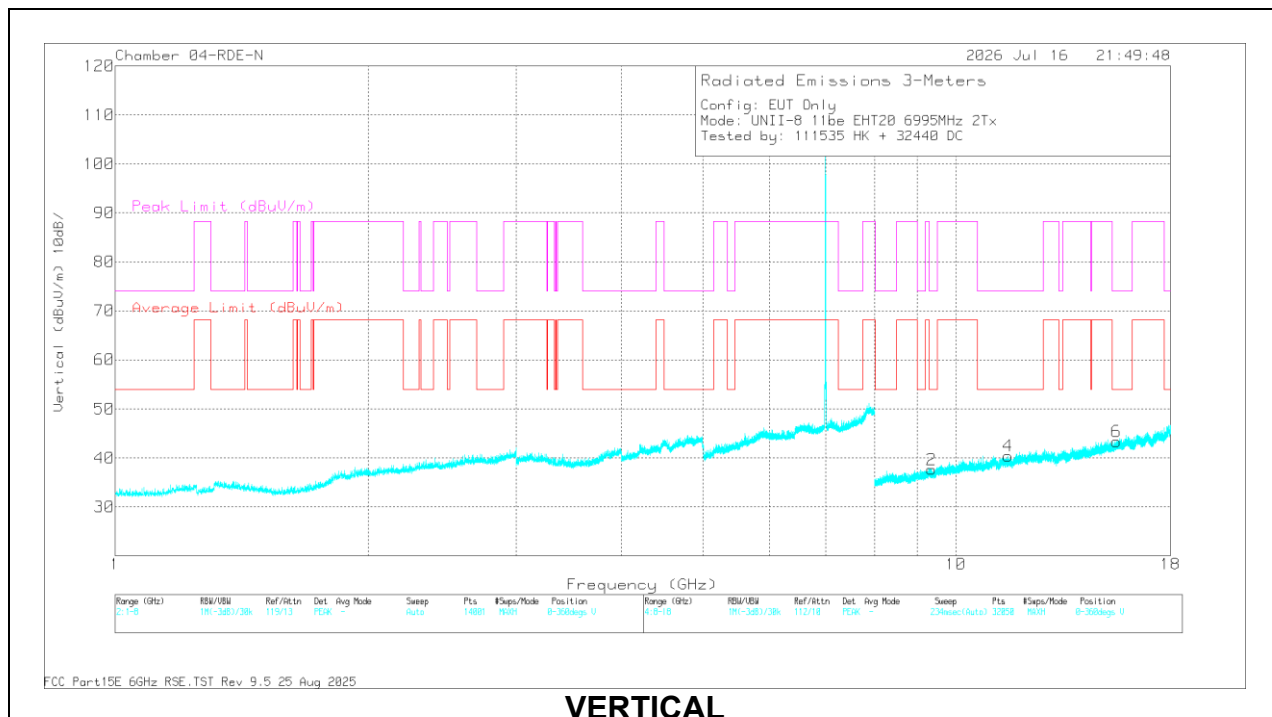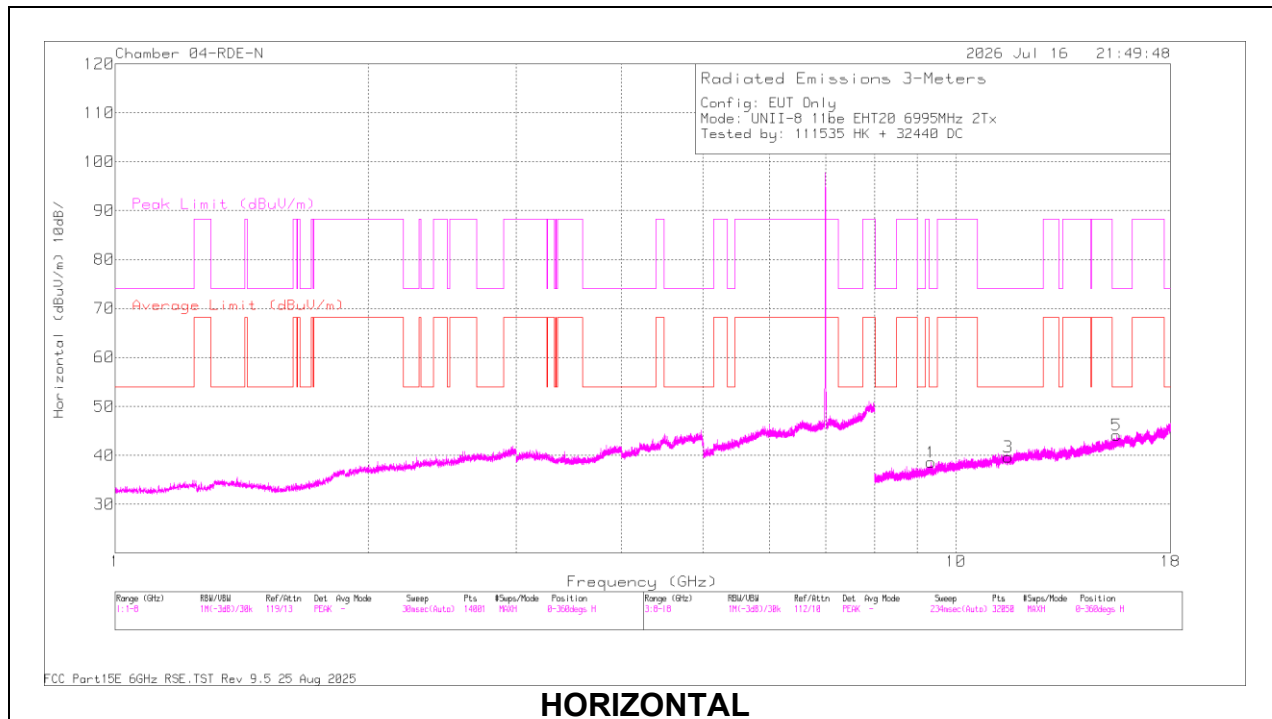WORST-CASE HARMONICS AND SPURIOUS EMISSIONS**802.11be EHT20 / 209 & 6995MHz / 2TX CDD / 52+26T / RU71:**

RADIATED EMISSIONS

Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbt/ Filt/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 11.521146	55.63	PK-U	38.4	0.00	-44.83	49.20	-	-	74	-24.8	360	211	H
* 11.53186	56.80	PK-U	38.4	0.00	-44.75	50.45	-	-	74	-23.55	274	366	V
* 11.546635	45.12	ADR	38.4	0.00	-44.62	38.90	54	-15.1	-	-	274	366	V
* 11.553702	44.18	ADR	38.4	0.00	-44.60	37.98	54	-16.02	-	-	360	211	H
* 15.517179	43.87	ADR	40.1	0.00	-43.38	40.59	54	-13.41	-	-	6	292	H
* 15.537471	43.92	ADR	40.2	0.00	-43.31	40.81	54	-13.19	-	-	63	110	V
* 15.539811	55.71	PK-U	40.2	0.00	-43.34	52.57	-	-	74	-21.43	6	292	H
* 15.544365	55.36	PK-U	40.2	0.00	-43.40	52.16	-	-	74	-21.84	63	110	V
* 9.335201	44.25	ADR	36.6	0.00	-45.23	35.62	54	-18.38	-	-	44	186	H
* 9.340316	44.09	ADR	36.6	0.00	-45.20	35.49	54	-18.51	-	-	360	155	V
* 9.348917	55.81	PK-U	36.6	0.00	-45.16	47.25	-	-	74	-26.75	44	186	H
* 9.360844	55.98	PK-U	36.6	0.00	-45.18	47.40	-	-	74	-26.6	360	155	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.2. TRANSMITTER OUTSIDE 6.115 - 7.125 GHz, 1- 18GHz (VLP)

1.2.1. 802.11be SISO/MIMO MODE IN UNII-5 BAND – LOW BANDEDGE

The UNII-5 band was excluded from band-edge testing because its starting frequency lies well inside the band-edge threshold.

1.2.2. 802.11a SISO MODE IN UNII-8 BAND – BANDEDGE

UNII-8 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11a	7115	6	7.125	-26.79	Pk	35.6	11.8	0	-32.85	-12.24	-	-	-7	-5.24	168	182	H
			7.125068	-26.33	Pk	35.6	11.8	0	-32.85	-11.78	-	-	-7	-4.78	168	182	H
			7.125	-44.25	RMS	35.6	11.8	0	-32.85	-29.7	-27	-2.7	-	-	168	182	H
			7.125068	-45.2	RMS	35.6	11.8	0	-32.85	-30.65	-27	-3.65	-	-	168	182	H
			7.125	-28.92	Pk	35.6	11.8	0	-32.85	-14.37	-	-	-7	-7.37	151	276	V
			7.125068	-28.48	Pk	35.6	11.8	0	-32.85	-13.93	-	-	-7	-6.93	151	276	V
			7.125	-45.77	RMS	35.6	11.8	0	-32.85	-31.22	-27	-4.22	-	-	151	276	V
			* 7.523913	-61.79	RMS	35.7	11.8	0	-32.28	-46.57	-41.2	-5.37	-	-	151	276	V
		16	7.125	-27.73	Pk	35.6	11.8	0.00	-32.85	-13.18	-	-	-7	-6.18	100	107	H
			7.125068	-27.7	Pk	35.6	11.8	0.00	-32.85	-13.15	-	-	-7	-6.15	100	107	H
			7.125	-44.99	RMS	35.6	11.8	0.00	-32.85	-30.44	-27	-3.44	-	-	100	107	H
			7.125068	-46.54	RMS	35.6	11.8	0.00	-32.85	-31.99	-27	-4.99	-	-	100	107	H
			7.125	-36.14	Pk	35.6	11.8	0.00	-32.85	-21.59	-	-	-7	-14.59	312	164	V
			* 7.334057	-49.68	Pk	35.6	11.8	0.00	-31.9	-34.18	-	-	-21.2	-12.98	312	164	V
			7.125	-52.61	RMS	35.6	11.8	0.00	-32.85	-38.06	-27	-11.06	-	-	312	164	V
			* 7.517769	-61.77	RMS	35.7	11.8	0.00	-32.36	-46.63	-41.2	-5.43	-	-	312	164	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.2.3. 802.11be SISO SU MODE IN UNII-8 BAND – BANDEDGE

UNII-8 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (SU Mode)	7095	6	7.125	-42.01	Pk	35.6	11.8	0.00	-33.85	-28.46	-	-	-7	-21.46	96	164	H
			* 7.281246	-48.97	Pk	35.6	11.8	0.00	-33.93	-35.5	-	-	-21.2	-14.3	96	164	H
			7.125	-57.88	RMS	35.6	11.8	0.00	-33.85	-44.33	-27	-17.33	-	-	96	164	H
			* 7.399624	-60.99	RMS	35.6	11.8	0.00	-33.81	-47.4	-41.2	-6.2	-	-	96	164	H
			7.125	-41.6	Pk	35.6	11.8	0.00	-33.85	-28.05	-	-	-7	-21.05	10	202	V
			* 7.50688	-49.08	Pk	35.6	11.8	0.00	-33.75	-35.43	-	-	-21.2	-14.23	10	202	V
		16	7.125	-57.78	RMS	35.6	11.8	0.00	-33.85	-44.23	-27	-17.23	-	-	10	202	V
			* 7.52438	-61.12	RMS	35.6	11.8	0.00	-33.72	-47.44	-41.2	-6.24	-	-	10	202	V
			7.125	-43.05	Pk	35.5	11.8	0.00	-36.47	-32.22	-	-	-7	-25.22	214	192	H
			* 7.371157	-47.56	Pk	35.5	11.8	0.00	-36.36	-36.62	-	-	-21.2	-15.42	214	192	H
			7.125	-56.75	RMS	35.5	11.8	0.00	-36.47	-45.92	-27	-18.92	-	-	214	192	H
			* 7.492724	-59.87	RMS	35.6	11.8	0.00	-36.12	-48.59	-41.2	-7.39	-	-	214	192	H
			7.125	-45.25	Pk	35.5	11.8	0.00	-36.47	-34.42	-	-	-7	-27.42	130	226	V
			* 7.523991	-47.47	Pk	35.6	11.8	0.00	-36.05	-36.12	-	-	-21.2	-14.92	130	226	V
			7.125	-58.47	RMS	35.5	11.8	0.00	-36.47	-47.64	-27	-20.64	-	-	130	226	V
			* 7.483391	-59.66	RMS	35.6	11.8	0.00	-36.31	-48.57	-41.2	-7.37	-	-	130	226	V
EHT40 (SU Mode)	7085	6	7.125	-29.18	Pk	35.6	11.8	0.00	-33.85	-15.63	-	-	-7	-8.63	104	173	H
			7.128568	-27.9	Pk	35.6	11.8	0.00	-33.81	-14.31	-	-	-7	-7.31	104	173	H
			7.125	-44.72	RMS	35.6	11.8	0.00	-33.85	-31.17	-27	-4.17	-	-	104	173	H
			7.126312	-44.27	RMS	35.6	11.8	0.00	-33.83	-30.7	-27	-3.7	-	-	104	173	H
			7.125	-30.72	Pk	35.6	11.8	0.00	-33.85	-17.17	-	-	-7	-10.17	11	166	V
			7.125223	-29.63	Pk	35.6	11.8	0.00	-33.85	-16.08	-	-	-7	-9.08	11	166	V
		16	7.125	-44.38	RMS	35.6	11.8	0.00	-33.85	-30.83	-27	-3.83	-	-	11	166	V
			7.125145	-44.02	RMS	35.6	11.8	0.00	-33.85	-30.47	-27	-3.47	-	-	11	166	V
			7.125	-29.88	Pk	35.5	11.8	0.00	-36.47	-19.05	-	-	-7	-12.05	205	215	H
			7.126156	-29.29	Pk	35.5	11.8	0.00	-36.37	-18.36	-	-	-7	-11.36	205	215	H
			7.125	-45.34	RMS	35.5	11.8	0.00	-36.47	-34.51	-27	-7.51	-	-	205	215	H
			* 7.500269	-59.96	RMS	35.6	11.8	0.00	-36.13	-48.69	-41.2	-7.49	-	-	205	215	H
			7.125	-36.47	Pk	35.5	11.8	0.00	-36.47	-25.64	-	-	-7	-18.64	129	201	V
			* 7.261723	-47.24	Pk	35.5	11.8	0.00	-36.39	-36.33	-	-	-21.2	-15.13	129	201	V
			7.125	-50.7	RMS	35.5	11.8	0.00	-36.47	-39.87	-27	-12.87	-	-	129	201	V
			* 7.51668	-59.89	RMS	35.6	11.8	0.00	-36.18	-48.67	-41.2	-7.47	-	-	129	201	V
EHT80 (SU Mode)	7025	6	7.125	-38.37	Pk	35.7	11.8	0.00	-37.88	-28.75	-	-	-7	-21.75	240	174	H
			7.358168	-47.01	Pk	35.6	11.8	0.00	-37.99	-37.6	-	-	-21.2	-16.4	240	174	H
			7.125	-51.66	RMS	35.7	11.8	0.00	-37.88	-42.04	-27	-15.04	-	-	240	174	H
			7.355135	-59.26	RMS	35.6	11.8	0.00	-37.95	-49.81	-41.2	-8.61	-	-	240	174	H
			7.125	-38.72	Pk	35.7	11.8	0.00	-37.88	-29.1	-	-	-7	-22.1	206	191	V
			7.259546	-47.99	Pk	35.6	11.8	0.00	-37.68	-38.27	-	-	-21.2	-17.07	206	191	V
		16	7.125	-52.86	RMS	35.7	11.8	0.00	-37.88	-43.24	-27	-16.24	-	-	206	191	V
			7.308857	-59.64	RMS	35.6	11.8	0.00	-37.81	-50.05	-41.2	-8.85	-	-	206	191	V
			7.125	-41.36	Pk	35.5	11.8	0.00	-36.47	-30.53	-	-	-7	-23.53	218	200	H
			* 7.47048	-47.56	Pk	35.6	11.8	0.00	-36.32	-36.48	-	-	-21.2	-15.28	218	200	H
			7.125	-54.73	RMS	35.5	11.8	0.00	-36.47	-43.9	-27	-16.9	-	-	218	200	H
			* 7.52228	-59.66	RMS	35.6	11.8	0.00	-36.17	-48.43	-41.2	-7.23	-	-	218	200	H
			7.125	-45.19	Pk	35.5	11.8	0.00	-36.47	-34.36	-	-	-7	-27.36	131	219	V
			* 7.522046	-47.44	Pk	35.6	11.8	0.00	-36.17	-36.21	-	-	-21.2	-15.01	131	219	V
			7.125	-58.36	RMS	35.5	11.8	0.00	-36.47	-47.53	-27	-20.53	-	-	131	219	V
			* 7.523835	-59.94	RMS	35.6	11.8	0.00	-36.07	-48.61	-41.2	-7.41	-	-	131	219	V
EHT160 (SU Mode)	6985	6	7.125	-32.89	Pk	38	11.8	0.00	-36.5	-19.59	-	-	-7	-12.59	3	148	H
			7.125	-44.31	RMS	38	11.8	0.14	-36.5	-30.87	-27	-3.87	-	-	3	148	H
			7.125612	-43.16	RMS	38	11.8	0.14	-36.5	-29.72	-27	-2.72	-	-	3	148	H
			7.141556	-29.46	Pk	38	11.8	0.00	-36.6	-16.26	-	-	-7	-9.26	3	148	H
			7.125	-32.21	Pk	38	11.8	0.00	-36.5	-18.91	-	-	-7	-11.91	351	214	V
			7.125	-43.65	RMS	38	11.8	0.14	-36.5	-30.21	-27	-3.21	-	-	351	214	V
		16	7.128956	-29.37	Pk	38	11.8	0.00	-36.6	-16.17	-	-	-7	-9.17	351	214	V
			7.131056	-42.87	RMS	38	11.8	0.14	-36.6	-29.53	-27	-2.53	-	-	351	214	V
			7.125	-35.6	Pk	35.5	11.8	0.00	-36.47	-24.77	-	-	-7	-17.77	204	195	H
			7.141401	-32.43	Pk	35.5	11.8	0.00	-36.29	-21.42	-	-	-7	-14.42	204	195	H
			7.125	-47.28	RMS	35.5	11.8	0.14	-36.47	-36.31	-27	-9.31	-	-	204	195	H
			* 7.459746	-59.79	RMS	35.6	11.8	0.14	-36.2	-48.45	-41.2	-7.25	-	-	204	195	H
			7.125	-42.68	Pk	35.5	11.8	0.00	-36.47	-31.85	-	-	-7	-24.85	131	191	V
			* 7.510769	-47.22	Pk	35.6	11.8	0.00	-36.17	-35.99	-	-	-21.2	-14.79	131	191	V
			7.125	-54.41	RMS	35.5	11.8	0.14	-36.47	-43.44	-27	-16.44	-	-	131	191	V
			* 7.524224	-59.76	RMS	35.6	11.8	0.14	-36.06	-48.28	-41.2	-7.08	-	-	131	191	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.2.4. 802.11be SISO PARTIAL RU MODE IN UNII-8 BAND – BANDEDGE

UNII-8 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (RU 106T / Index 54)	7095	6	7.125	-51.12	Pk	35.6	11.8	0.00	-33.85	-37.57	-	-	-7	-30.57	96	164	H
			* 7.51108	-49.03	Pk	35.6	11.8	0.00	-33.7	-35.33	-	-	-21.2	-14.13	96	164	H
			7.125	-62.67	RMS	35.6	11.8	0.09	-33.85	-49.03	-27	-22.03	-	-	96	164	H
			* 7.50968	-60.98	RMS	35.6	11.8	0.09	-33.71	-47.2	-41.2	-6	-	-	96	164	H
			7.125	-51.14	Pk	35.6	11.8	0.00	-33.85	-37.59	-	-	-7	-30.59	10	202	V
			* 7.370846	-49.03	Pk	35.6	11.8	0.00	-33.97	-35.6	-	-	-21.2	-14.4	10	202	V
			7.125	-62.41	RMS	35.6	11.8	0.09	-33.85	-48.77	-27	-21.77	-	-	10	202	V
			* 7.513258	-61.27	RMS	35.6	11.8	0.09	-33.7	-47.48	-41.2	-6.28	-	-	10	202	V
		16	7.125	-63.09	Pk	35.7	11.8	0.00	-22.76	-38.35	-	-	-7	-31.35	90	218	H
			* 7.466591	-61.2	Pk	35.7	11.8	0.00	-22.14	-35.84	-	-	-21.2	-14.64	90	218	H
			7.125	-73.72	RMS	35.7	11.8	0.09	-22.76	-48.89	-27	-21.89	-	-	90	218	H
			* 7.520024	-73.47	RMS	35.7	11.8	0.09	-22.15	-48.03	-41.2	-6.83	-	-	90	218	H
			7.125	-63.14	Pk	35.7	11.8	0.00	-22.76	-38.4	-	-	-7	-31.4	153	221	V
			* 7.483469	-62.02	Pk	35.7	11.8	0.00	-22.15	-36.67	-	-	-21.2	-15.47	153	221	V
			7.125	-73.55	RMS	35.7	11.8	0.09	-22.76	-48.72	-27	-21.72	-	-	153	221	V
			* 7.495835	-73.54	RMS	35.7	11.8	0.09	-22.16	-48.11	-41.2	-6.91	-	-	153	221	V
EHT80 (RU 464+242T / Index 90)	7085	6	7.125	-51.14	Pk	35.6	11.8	0.00	-33.85	-37.59	-	-	-7	-30.59	136	202	H
			* 7.463402	-49.02	Pk	35.6	11.8	0.00	-33.88	-35.5	-	-	-21.2	-14.3	136	202	H
			7.125	-62.27	RMS	35.6	11.8	0.00	-33.85	-48.72	-27	-21.72	-	-	136	202	H
			* 7.485491	-61.19	RMS	35.6	11.8	0.00	-33.72	-47.51	-41.2	-6.31	-	-	136	202	H
			7.125	-51.73	Pk	35.6	11.8	0.00	-33.85	-38.18	-	-	-7	-31.18	73	236	V
			* 7.508824	-49.26	Pk	35.6	11.8	0.00	-33.72	-35.58	-	-	-21.2	-14.38	73	236	V
			7.125	-62.42	RMS	35.6	11.8	0.00	-33.85	-48.87	-27	-21.87	-	-	73	236	V
			* 7.524769	-61.15	RMS	35.6	11.8	0.00	-33.71	-47.46	-41.2	-6.26	-	-	73	236	V
		16	7.125	-50.41	Pk	35.6	11.8	0.00	-33.85	-36.86	-	-	-7	-29.86	356	376	H
			7.517924	-48.78	Pk	35.6	11.8	0.00	-33.75	-35.13	-	-	-21.2	-13.93	356	376	H
			7.125	-61.96	RMS	35.6	11.8	0.00	-33.85	-48.41	-27	-21.41	-	-	356	376	H
			7.508513	-61.12	RMS	35.6	11.8	0.00	-33.73	-47.45	-41.2	-6.25	-	-	356	376	H
			7.125	-52.27	Pk	35.6	11.8	0.00	-33.85	-38.72	-	-	-7	-31.72	327	346	V
			7.399779	-49.16	Pk	35.6	11.8	0.00	-33.81	-35.57	-	-	-21.2	-14.37	327	346	V
			7.125	-62.39	RMS	35.6	11.8	0.00	-33.85	-48.84	-27	-21.84	-	-	327	346	V
			7.510535	-61.3	RMS	35.6	11.8	0.00	-33.7	-47.6	-41.2	-6.4	-	-	327	346	V
EHT160 (RU996+484 / Index 94)	7025	6	7.125	-43.87	Pk	35.6	11.8	0.00	-33.85	-30.32	-	-	-7	-23.32	133	166	H
			* 7.343701	-48.51	Pk	35.6	11.8	0.00	-33.98	-35.09	-	-	-21.2	-13.89	133	166	H
			7.125	-55.93	RMS	35.6	11.8	0.00	-33.85	-42.38	-27	-15.38	-	-	133	166	H
			* 7.399157	-61.22	RMS	35.6	11.8	0.00	-33.81	-47.63	-41.2	-6.43	-	-	133	166	H
			7.125	-43.21	Pk	35.6	11.8	0.00	-33.85	-29.66	-	-	-7	-22.66	61	216	V
			* 7.373335	-49.15	Pk	35.6	11.8	0.00	-33.97	-35.72	-	-	-21.2	-14.52	61	216	V
			7.125	-56.16	RMS	35.6	11.8	0.00	-33.85	-42.61	-27	-15.61	-	-	61	216	V
			* 7.524769	-61.1	RMS	35.6	11.8	0.00	-33.71	-47.41	-41.2	-6.21	-	-	61	216	V
		16	7.125	-48.48	Pk	35.6	11.8	0.00	-33.85	-34.93	-	-	-7	-27.93	357	373	H
			7.481291	-49.13	Pk	35.6	11.8	0.00	-33.7	-35.43	-	-	-21.2	-14.23	357	373	H
			7.125	-60.16	RMS	35.6	11.8	0.00	-33.85	-46.61	-27	-19.61	-	-	357	373	H
			7.397835	-60.95	RMS	35.6	11.8	0.00	-33.82	-47.37	-41.2	-6.17	-	-	357	373	H
			7.125	-51.46	Pk	35.6	11.8	0.00	-33.85	-37.91	-	-	-7	-30.91	331	146	V
			7.508669	-48.89	Pk	35.6	11.8	0.00	-33.73	-35.22	-	-	-21.2	-14.02	331	146	V
			7.125	-61.91	RMS	35.6	11.8	0.00	-33.85	-48.36	-27	-21.36	-	-	331	146	V
			7.508124	-61.24	RMS	35.6	11.8	0.00	-33.75	-47.59	-41.2	-6.39	-	-	331	146	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.2.5. 802.11a MIMO MODE IN UNII-8 BAND – BANDEDGE

UNII-8 (MIMO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11a	7115	6 + 16	7.125	-32.89	Pk	38	11.8	0	-36.5	-19.59	-	-	-7	-12.59	3	148	H
			7.125	-44.31	RMS	38	11.8	0	-36.5	-31.01	-27	-4.01	-	-	3	148	H
			7.125612	-43.16	RMS	38	11.8	0	-36.5	-29.86	-27	-2.86	-	-	3	148	H
			7.141556	-29.46	Pk	38	11.8	0	-36.6	-16.26	-	-	-7	-9.26	3	148	H
			7.125	-27.32	Pk	35.6	11.8	0	-32.85	-12.77	-	-	-7	-5.77	67	198	V
			7.125068	-27.84	Pk	35.6	11.8	0	-32.85	-13.29	-	-	-7	-6.29	67	198	V
			7.125	-44.99	RMS	35.6	11.8	0	-32.85	-30.44	-27	-3.44	-	-	67	198	V
			7.125068	-45.59	RMS	35.6	11.8	0	-32.85	-31.04	-27	-4.04	-	-	67	198	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.2.6. 802.11be MIMO SU MODE IN UNII-8 BAND – BANDEDGE

UNII-8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (SU Mode)	7095	6 + 16	7.125	-41.11	Pk	35.6	11.8	0	-33.85	-27.56	-	-	-7	-20.56	156	282	H
			* 7.413935	-49.36	Pk	35.6	11.8	0	-33.79	-35.75	-	-	-21.2	-14.55	156	282	H
			7.125	-58.22	RMS	35.6	11.8	0	-33.85	-44.67	-27	-17.67	-	-	156	282	H
			* 7.481213	-61.4	RMS	35.6	11.8	0	-33.7	-47.7	-41.2	-6.5	-	-	156	282	H
			7.125	-43.91	Pk	35.6	11.8	0	-33.85	-30.36	-	-	-7	-23.36	62	259	V
			* 7.522513	-48.98	Pk	35.6	11.8	0	-33.77	-35.35	-	-	-21.2	-14.15	62	259	V
			7.125	-58.41	RMS	35.6	11.8	0	-33.85	-44.86	-27	-17.86	-	-	62	259	V
			* 7.520724	-61.05	RMS	35.6	11.8	0	-33.78	-47.43	-41.2	-6.23	-	-	62	259	V
EHT40 (SU Mode)	7085	6 + 16	7.125	-32.23	Pk	35.4	11.8	0	-35.8	-20.83	-	-	-7	-13.83	41	248	H
			7.126856	-26.99	Pk	35.4	11.8	0	-35.79	-15.58	-	-	-7	-8.58	41	248	H
			7.125	-45.39	RMS	35.4	11.8	0	-35.8	-33.99	-27	-6.99	-	-	41	248	H
			7.126623	-41.15	RMS	35.4	11.8	0	-35.79	-29.74	-27	-2.74	-	-	41	248	H
			7.125	-27.69	Pk	35.4	11.8	0	-35.8	-16.29	-	-	-7	-9.29	307	199	V
			7.129034	-26.13	Pk	35.4	11.8	0	-35.76	-14.69	-	-	-7	-7.69	307	199	V
			7.125	-41.14	RMS	35.4	11.8	0	-35.8	-29.74	-27	-2.74	-	-	307	199	V
			7.129034	-41.81	RMS	35.4	11.8	0	-35.76	-30.37	-27	-3.37	-	-	307	199	V
EHT80 (SU Mode)	7025	6 + 16	7.125	-50.75	Pk	35.7	11.8	0	-22.76	-26.01	-	-	-7	-19.01	275	206	H
			* 7.500035	-60.16	Pk	35.7	11.8	0	-22.12	-34.78	-	-	-21.2	-13.58	275	206	H
			7.125	-64.29	RMS	35.7	11.8	0	-22.76	-39.55	-27	-12.55	-	-	275	206	H
			* 7.52228	-73.4	RMS	35.7	11.8	0	-22.1	-48	-41.2	-6.8	-	-	275	206	H
			7.125	-54.9	Pk	35.7	11.8	0	-22.76	-30.16	-	-	-7	-23.16	259	251	V
			* 7.520802	-61.35	Pk	35.7	11.8	0	-22.13	-35.98	-	-	-21.2	-14.78	259	251	V
			7.125	-67.36	RMS	35.7	11.8	0	-22.76	-42.62	-27	-15.62	-	-	259	251	V
			* 7.494513	-73.4	RMS	35.7	11.8	0	-22.12	-48.02	-41.2	-6.82	-	-	259	251	V
EHT160 (SU Mode)	6985	6 + 16	7.125	-37.61	Pk	35.6	11.8	0	-33.85	-24.06	-	-	-7	-17.06	105	165	H
			7.132223	-31.04	Pk	35.6	11.8	0	-33.8	-17.44	-	-	-7	-10.44	105	165	H
			7.125	-48.57	RMS	35.6	11.8	0.14	-33.85	-34.88	-27	-7.88	-	-	105	165	H
			7.126312	-44.44	RMS	35.6	11.8	0.14	-33.83	-30.73	-27	-3.73	-	-	105	165	H
			7.125	-35.29	Pk	35.6	11.8	0	-33.85	-21.74	-	-	-7	-14.74	353	187	V
			7.129112	-30.67	Pk	35.6	11.8	0	-33.82	-17.09	-	-	-7	-10.09	353	187	V
			7.125	-47.27	RMS	35.6	11.8	0.14	-33.85	-33.58	-27	-6.58	-	-	353	187	V
			7.128723	-43.47	RMS	35.6	11.8	0.14	-33.81	-29.74	-27	-2.74	-	-	353	187	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.2.7. 802.11be MIMO PARTIAL RU MODE IN UNII-8 BAND – BANDEDGE

UNII-8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (RU 106T / Index 54)	7095	6 + 16	7.125	-51.79	Pk	35.6	11.8	0.00	-33.85	-38.24	-	-	-7	-31.24	156	282	H
			* 7.513569	-48.61	Pk	35.6	11.8	0.00	-33.7	-34.91	-	-	-21.2	-13.71	156	282	H
			7.125	-62.71	RMS	35.6	11.8	0.09	-33.85	-49.07	-27	-22.07	-	-	156	282	H
			* 7.517069	-61.28	RMS	35.6	11.8	0.09	-33.74	-47.53	-41.2	-6.33	-	-	156	282	H
			7.125	-51.57	Pk	35.6	11.8	0.00	-33.85	-38.02	-	-	-7	-31.02	62	259	V
			* 7.278057	-48.76	Pk	35.6	11.8	0.00	-33.92	-35.28	-	-	-21.2	-14.08	62	259	V
			7.125	-62.89	RMS	35.6	11.8	0.09	-33.85	-49.25	-27	-22.25	-	-	62	259	V
			* 7.513491	-60.97	RMS	35.6	11.8	0.09	-33.7	-47.18	-41.2	-5.98	-	-	62	259	V
EHT80 (RU 484+242T / Index 92)	7025	6 + 16	7.125	-49.67	Pk	35.6	11.8	0.00	-33.85	-36.12	-	-	-7	-29.12	140	177	H
			* 7.378857	-49.21	Pk	35.6	11.8	0.00	-33.88	-35.69	-	-	-21.2	-14.49	140	177	H
			7.125	-61.63	RMS	35.6	11.8	0.00	-33.85	-48.08	-27	-21.08	-	-	140	177	H
			* 7.438902	-61.26	RMS	35.6	11.8	0.00	-33.77	-47.63	-41.2	-6.43	-	-	140	177	H
			7.125	-51.85	Pk	35.6	11.8	0.00	-33.85	-38.3	-	-	-7	-31.3	45	228	V
			* 7.452357	-48.89	Pk	35.6	11.8	0.00	-33.84	-35.33	-	-	-21.2	-14.13	45	228	V
			7.125	-61.95	RMS	35.6	11.8	0.00	-33.85	-48.4	-27	-21.4	-	-	45	228	V
			* 7.512791	-61.27	RMS	35.6	11.8	0.00	-33.7	-47.57	-41.2	-6.37	-	-	45	228	V
EHT160 (RU 996+484T / Index 94)	6985	6 + 16	7.125	-51.27	Pk	35.6	11.8	0.00	-33.85	-37.72	-	-	-7	-30.72	123	248	H
			* 7.510691	-48.11	Pk	35.6	11.8	0.00	-33.7	-34.41	-	-	-21.2	-13.21	123	248	H
			7.125	-61.63	RMS	35.6	11.8	0.00	-33.85	-48.08	-27	-21.08	-	-	123	248	H
			* 7.511469	-61.24	RMS	35.6	11.8	0.00	-33.71	-47.55	-41.2	-6.35	-	-	123	248	H
			7.125	-47.8	Pk	35.6	11.8	0.00	-33.85	-34.25	-	-	-7	-27.25	64	294	V
			* 7.524846	-49.09	Pk	35.6	11.8	0.00	-33.7	-35.39	-	-	-21.2	-14.19	64	294	V
			7.125	-61.61	RMS	35.6	11.8	0.00	-33.85	-48.06	-27	-21.06	-	-	64	294	V
			* 7.509913	-61.02	RMS	35.6	11.8	0.00	-33.71	-47.33	-41.2	-6.13	-	-	64	294	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

WORST-CASE BANDEDGE (HIGH CHANNEL)

802.11be EHT160 / 207 & 6985MHz / 1Tx – ANT 6 / SISO / SU:

VERTICAL RESULT

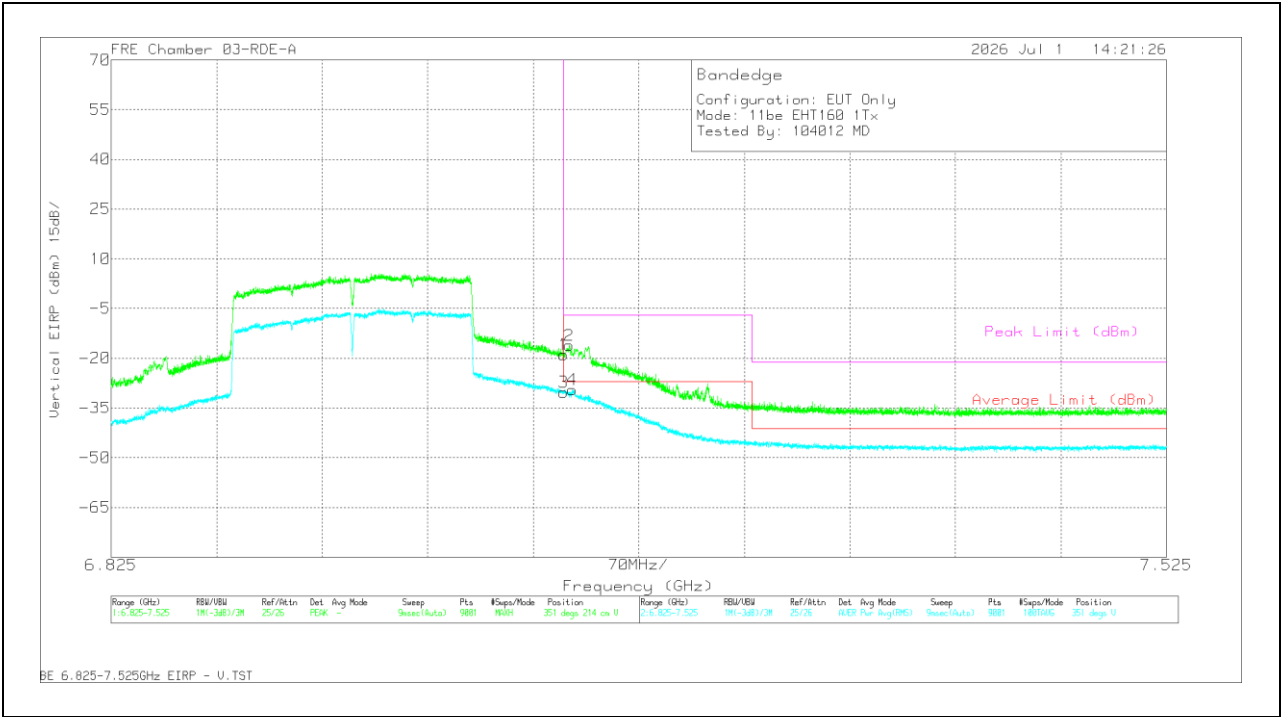

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	80402 ACF (dB)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.125	-32.21	Pk	38	11.8	0	-36.5	-18.91	-	-	-7	-11.91	351	214	V
3	7.125	-43.65	RMS	38	11.8	.14	-36.5	-30.21	-27	-3.21	-	-	351	214	V
2	7.128956	-29.37	Pk	38	11.8	0	-36.6	-16.17	-	-	-7	-9.17	351	214	V
4	7.131056	-42.87	RMS	38	11.8	.14	-36.6	-29.53	-27	-2.53	-	-	351	214	V

Pk - Peak detector
RMS - RMS detection

1.2.8. 802.11a MIMO MODE IN UNII-8 BAND – SPURIOUS EMISSIONS**20MHz**

UNII-8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/F ltr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11a mode	7115	6 + 16	* 2.352659	31.5	ADR	31.8	-26.53	0	36.77	54	-17.23	-	-	0	201	V
			* 2.352759	43.9	PK-U	31.8	-26.53	0	49.17	-	-	74	-24.83	0	201	V
			* 2.375063	31.55	ADR	32	-26.68	0	36.87	54	-17.13	-	-	0	100	H
			* 2.387616	43.24	PK-U	32	-26.63	0	48.61	-	-	74	-25.39	0	100	H
			* 3.53741	43.56	PK-U	33.2	-25.44	0	51.32	-	-	88.2	-36.88	0	200	V
			* 3.554112	31.11	ADR	33.2	-25.39	0	38.92	68.2	-29.28	-	-	0	200	V
			* 3.570733	31.05	ADR	33.2	-25.42	0	38.83	68.2	-29.37	-	-	0	100	H
			* 3.570968	42.89	PK-U	33.2	-25.42	0	50.67	-	-	88.2	-37.53	0	100	H
			14.24173	44.34	ADR	39.2	-44.04	0	39.5	68.2	-28.7	-	-	0	100	H
			14.242729	56.18	PK-U	39.2	-44	0	51.38	-	-	88.2	-36.82	0	201	V
			14.244943	44.44	ADR	39.2	-43.98	0	39.66	68.2	-28.54	-	-	0	201	V
			14.246004	56.62	PK-U	39.2	-43.95	0	51.87	-	-	88.2	-36.33	0	100	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.2.9. 802.11be MIMO MODE – SPURIOUS EMISSIONS

20MHz

UNII-5-8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/FI tr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	6115 (Low Channel)	6 + 16	2.985114	59.1	PK-U	32.8	-48.1	0.00	43.8	-	-	88.2	-44.4	360	101	H
			2.984029	48.18	ADR	32.8	-48.1	0.00	32.88	68.2	-35.32	-	-	360	101	H
			2.975885	59.04	PK-U	32.8	-48.01	0.00	43.83	-	-	88.2	-44.37	360	101	V
			2.979276	47.62	ADR	32.8	-48.1	0.00	32.32	68.2	-35.88	-	-	360	101	V
			9.998008	56.22	PK-U	37.4	-45.2	0.00	48.42	-	-	88.2	-39.78	360	200	H
			9.990981	44.71	ADR	37.4	-45.2	0.00	36.91	68.2	-31.29	-	-	360	200	H
			17.145011	53.63	PK-U	41.4	-40.2	0.00	54.83	-	-	88.2	-33.37	360	200	H
			17.146507	41.24	ADR	41.4	-40.2	0.00	42.44	68.2	-25.76	-	-	360	200	H
			9.999852	56	PK-U	37.4	-45.29	0.00	48.11	-	-	88.2	-40.09	360	200	V
			9.995605	44.5	ADR	37.4	-45.2	0.00	36.7	68.2	-31.5	-	-	360	200	V
			17.146335	53.39	PK-U	41.4	-40.2	0.00	54.59	-	-	88.2	-33.61	360	200	V
			17.162293	41.13	ADR	41.4	-40.2	0.00	42.33	68.2	-25.87	-	-	360	200	V
	6535 (Mid Channel)	6 + 16	* 9.104621	56.89	PK-U	36.4	-44.02	0.00	49.27	-	-	74	-24.73	360	101	H
			* 9.087291	44.98	ADR	36.4	-44.32	0.00	37.06	54	-16.94	-	-	360	101	H
			* 13.281564	56.67	PK-U	39.5	-44.1	0.00	52.07	-	-	74	-21.93	360	198	H
			* 13.299274	45.16	ADR	39.6	-43.98	0.00	40.78	54	-13.22	-	-	360	198	H
			* 9.09037	56.34	PK-U	36.4	-44.21	0.00	48.53	-	-	74	-25.47	360	101	V
			* 9.103649	45.17	ADR	36.4	-44.05	0.00	37.52	54	-16.48	-	-	360	101	V
			* 13.295691	56.47	PK-U	39.6	-44.01	0.00	52.06	-	-	74	-21.94	360	101	V
			* 13.295355	45.06	ADR	39.6	-43.99	0.00	40.67	54	-13.33	-	-	360	101	V
			3.140646	57.44	PK-U	32.9	-46.69	0.00	43.65	-	-	88.2	-44.55	360	101	H
			3.151115	57.45	PK-U	32.9	-46.63	0.00	43.72	-	-	88.2	-44.48	360	101	V
			3.163057	45.36	ADR	33	-46.64	0.00	31.72	68.2	-36.48	-	-	360	101	H
			3.165985	45.33	ADR	33	-46.65	0.00	31.68	68.2	-36.52	-	-	360	101	V
	7095 (High Channel)	6 + 16	* 2.354926	61.62	PK-U	32.1	-49.2	0.00	44.52	-	-	74	-29.48	1	200	H
			* 2.354877	49.78	ADR	32.1	-49.2	0.00	32.68	54	-21.32	-	-	1	200	H
			* 3.54704	58.04	PK-U	32.9	-46.7	0.00	44.24	-	-	88.2	-43.96	1	200	H
			* 3.548916	45.69	ADR	32.9	-46.69	0.00	31.9	68.2	-36.3	-	-	1	200	H
			* 2.353573	61.87	PK-U	32.1	-49.2	0.00	44.77	-	-	74	-29.23	1	200	V
			* 2.359319	49.71	ADR	32.1	-49.13	0.00	32.68	54	-21.32	-	-	1	200	V
			* 3.551463	57.46	PK-U	32.9	-46.7	0.00	43.66	-	-	88.2	-44.54	1	200	V
			* 3.547192	45.69	ADR	32.9	-46.68	0.00	31.91	68.2	-36.29	-	-	1	200	V
			14.187207	55.07	PK-U	38.9	-41.8	0.00	52.17	-	-	88.2	-36.03	1	101	H
			14.203566	43.02	ADR	38.9	-41.7	0.00	40.22	68.2	-27.98	-	-	1	101	H
			14.210849	43.29	ADR	38.9	-41.7	0.00	40.49	68.2	-27.71	-	-	1	101	V
			14.214972	54.71	PK-U	38.9	-41.7	0.00	51.91	-	-	88.2	-36.29	1	101	V
	6115 (106T) (Low Channel)	6 + 16	* 1.262004	58.28	PK-U	29.2	-46.4	0.00	41.08	-	-	88.2	-47.12	360	101	V
			* 1.267875	46.33	ADR	29.3	-46.3	0.00	29.33	68.2	-38.87	-	-	360	101	H
			* 1.269106	46.24	ADR	29.3	-46.3	0.00	29.24	68.2	-38.96	-	-	360	101	V
			* 1.271252	58.06	PK-U	29.3	-46.4	0.00	40.96	-	-	88.2	-47.24	360	101	H
			* 11.564467	47.38	PK-U	38.3	-35.2	0.00	50.48	-	-	74	-23.52	360	200	V
			* 11.583594	35.54	ADR	38.3	-34.8	0.00	39.04	54	-14.96	-	-	360	200	V
			* 11.589086	47.23	PK-U	38.3	-34.8	0.00	50.73	-	-	74	-23.27	360	200	H
			* 11.595028	35.57	ADR	38.3	-34.9	0.00	38.97	54	-15.03	-	-	360	200	H
			* 4.017275	40.46	ADR	33.3	-41.8	0.00	31.96	54	-22.04	-	-	360	199	H
			* 4.019915	40.23	ADR	33.3	-41.7	0.00	31.83	54	-22.17	-	-	360	200	V
			* 4.025666	51.93	PK-U	33.3	-41.8	0.00	43.43	-	-	74	-30.57	360	199	H
			* 4.027461	52.07	PK-U	33.3	-41.8	0.00	43.57	-	-	74	-30.43	360	200	V
	6535 (106T) (Mid Channel)	6 + 16	* 4.637394	55.96	PK-U	34.1	-45.38	0.00	44.68	-	-	74	-29.32	360	101	H
			* 4.637865	56.2	PK-U	34.1	-45.38	0.00	44.92	-	-	74	-29.08	360	101	V
			* 4.640656	44.17	ADR	34.1	-45.36	0.00	32.91	54	-21.09	-	-	360	101	H
			* 4.646433	44.22	ADR	34.1	-45.39	0.00	32.93	54	-21.07	-	-	360	101	V
			* 8.494615	54.78	PK-U	35.8	-43.33	0.00	47.25	-	-	74	-26.75	360	101	H
			13.651082	53.88	PK-U	38.8	-42.1	0.00	50.58	-	-	88.2	-37.62	360	101	H
			13.655714	42.33	ADR	38.8	-42.07	0.00	39.06	68.2	-29.14	-	-	360	101	H
			13.667073	42.19	ADR	38.8	-42.05	0.00	38.94	68.2	-29.26	-	-	360	101	V
			13.673528	54.24	PK-U	38.8	-42.05	0.00	50.99	-	-	88.2	-37.21	360	101	V
			8.503195	42.69	ADR	35.8	-43.37	0.00	35.12	68.2	-33.08	-	-	360	101	H
			8.503718	54.25	PK-U	35.8	-43.37	0.00	46.68	-	-	88.2	-41.52	360	101	V
			8.505598	42.69	ADR	35.8	-43.39	0.00	35.1	68.2	-33.1	-	-	360	101	V
	7095 (106T) (High Channel)	6 + 16	* 5.416446	55.89	PK-U	34.6	-35.27	0.00	55.22	-	-	74	-18.78	360	101	H
			* 5.401122	43.86	ADR	34.5	-35.25	0.00	43.11	54	-10.89	-	-	360	101	H
			* 5.41258	55.87	PK-U	34.6	-35.24	0.00	55.23	-	-	74	-18.77	360	101	V
			* 5.420492	43.89	ADR	34.6	-35.23	0.00	43.26	54	-10.74	-	-	360	101	V
			* 10.875429	54.77	PK-U	37.7	-43.12	0.00	49.35	-	-	74	-24.65	360	101	H
			* 10.875085	42.93	ADR	37.7	-43.12	0.00	37.51	54	-16.49	-	-	360	101	H
			* 10.87882	54.75	PK-U	37.7	-43.17	0.00	49.28	-	-	74	-24.72	360	101	V
			* 10.877125	43.06	ADR	37.7	-43.14	0.00	37.62	54	-16.38	-	-	360	101	V
			3.461283	44.17	ADR	32.8	-45.14	0.00	31.83	68.2	-36.37	-	-	360	101	V
			3.46338	56.12	PK-U	32.8	-45.16	0.00	43.76	-	-	88.2	-44.44	360	101	V
			3.465574	55.8	PK-U	32.9	-45.14	0.00	43.56	-	-	88.2	-44.64	360	101	H
			3.467956	44.1	ADR	32.9	-45.09	0.00	31.91	68.2	-36.29	-	-	360	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

40MHz

UNII-5-8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	6125 (Low Channel)	6 + 16	* 12.313069	55.78	PK-U	38.9	-42.73	0.00	51.95	-	-	74	-22.05	0	200	H
			* 12.32702	43.63	ADR	38.9	-42.95	0.00	39.58	54	-14.42	-	-	0	101	V
			* 12.338247	55.52	PK-U	38.9	-42.58	0.00	51.84	-	-	74	-22.16	0	101	V
			* 12.340578	43.84	ADR	38.9	-42.45	0.00	40.29	54	-13.71	-	-	0	200	H
			* 8.072429	56.12	PK-U	35.8	-43.55	0.00	48.37	-	-	74	-25.63	0	101	H
			* 8.073169	55.93	PK-U	35.8	-43.57	0.00	48.16	-	-	74	-25.84	0	101	V
			* 8.091647	44	ADR	35.8	-43.58	0.00	36.22	54	-17.78	-	-	0	101	H
			* 8.097835	44.03	ADR	35.8	-43.54	0.00	36.29	54	-17.71	-	-	0	101	V
			17.624163	58.4	PK-U	41.5	-42.09	0.00	57.81	-	-	88.2	-30.39	0	200	V
			17.628179	46.02	ADR	41.6	-42	0.00	45.62	68.2	-22.58	-	-	0	199	H
	6525 (Mid Channel)	6 + 16	17.629531	57.93	PK-U	41.6	-41.97	0.00	57.56	-	-	88.2	-30.64	0	199	H
			17.633462	46.09	ADR	41.6	-41.8	0.00	45.89	68.2	-22.31	-	-	0	200	V
			* 1.263534	46.57	ADR	29.2	-46.3	0.00	29.47	68.2	-38.73	-	-	360	200	H
			* 1.26356	46.3	ADR	29.2	-46.3	0.00	29.2	68.2	-39	-	-	360	200	V
			* 1.266168	58.04	PK-U	29.2	-46.3	0.00	40.94	-	-	88.2	-47.26	360	200	V
			* 1.270191	57.89	PK-U	29.3	-46.4	0.00	40.79	-	-	88.2	-47.41	360	200	H
			* 11.973511	47	PK-U	38.7	-34.5	0.00	51.2	-	-	74	-22.8	360	198	V
			* 11.974889	34.72	ADR	38.7	-34.5	0.00	38.92	54	-15.08	-	-	360	198	V
			* 11.99158	35	ADR	38.6	-34	0.00	39.6	54	-14.4	-	-	360	198	H
			* 11.992731	47.22	PK-U	38.6	-34	0.00	51.82	-	-	74	-22.18	360	198	H
	7085 (High Channel)	6 + 16	* 3.786246	52.19	PK-U	33.4	-41.9	0.00	43.69	-	-	74	-30.31	360	101	H
			* 3.793694	40.57	ADR	33.4	-41.9	0.00	32.07	54	-21.93	-	-	360	101	V
			* 3.798578	52.14	PK-U	33.5	-41.9	0.00	43.74	-	-	74	-30.26	360	101	V
			* 3.799996	40.36	ADR	33.5	-41.9	0.00	31.96	54	-22.04	-	-	360	101	H
			* 8.13985	56.43	PK-U	35.8	-43.03	0.00	49.2	-	-	74	-24.8	0	198	H
			* 8.168027	44.61	ADR	35.8	-43.37	0.00	37.04	54	-16.96	-	-	0	198	H
			* 11.040301	55.64	PK-U	37.9	-42.04	0.00	51.5	-	-	74	-22.5	0	198	H
			* 11.040857	43.89	ADR	37.9	-41.96	0.00	39.83	54	-14.17	-	-	0	198	H
			* 8.174918	56.59	PK-U	35.8	-43.38	0.00	49.01	-	-	74	-24.99	0	101	V
			* 8.167327	44.29	ADR	35.8	-43.45	0.00	36.64	54	-17.36	-	-	0	101	V
			* 11.036589	56.16	PK-U	37.9	-42.16	0.00	51.9	-	-	74	-22.1	0	199	V
			* 11.038365	44.1	ADR	37.9	-42.2	0.00	39.8	54	-14.2	-	-	0	199	V
			2.582926	59.24	PK-U	32.4	-48.62	0.00	43.02	-	-	88.2	-45.18	0	198	V
			2.589139	47.26	ADR	32.4	-48.69	0.00	30.97	68.2	-37.23	-	-	0	198	V
			2.592976	47.45	ADR	32.4	-48.72	0.00	31.13	68.2	-37.07	-	-	0	198	H
			2.596122	59.4	PK-U	32.4	-48.73	0.00	43.07	-	-	88.2	-45.13	0	198	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

80MHz

UNII-5.8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	6145 (Low Channel)	6 + 5	* 4.29148	52.07	PK-U	33.3	-41.6	0.00	43.77	-	-	74	-30.23	0	200	H
			* 4.289	40.56	ADR	33.3	-41.6	0.00	32.26	54	-21.74	-	-	0	200	H
			* 4.283956	52.35	PK-U	33.3	-41.6	0.00	44.05	-	-	74	-29.95	0	101	V
			* 4.284067	40.38	ADR	33.3	-41.6	0.00	32.08	54	-21.92	-	-	0	101	V
			* 12.318477	46.32	PK-U	38.9	-34.6	0.00	50.62	-	-	74	-23.38	0	199	H
			* 12.29712	34.26	ADR	38.9	-34.8	0.00	38.36	54	-15.64	-	-	0	199	H
			* 12.279232	46.16	PK-U	38.9	-34.8	0.00	50.26	-	-	74	-23.74	0	101	V
			* 12.287916	33.93	ADR	38.9	-34.8	0.00	38.03	54	-15.97	-	-	0	101	V
			1.887058	45.11	ADR	31.2	-45.4	0.00	30.91	68.2	-37.29	-	-	0	101	V
			1.887124	56.8	PK-U	31.2	-45.4	0.00	42.6	-	-	88.2	-45.6	0	101	V
			1.890191	56.95	PK-U	31.1	-45.4	0.00	42.65	-	-	88.2	-45.55	0	101	H
			1.89103	45.27	ADR	31.1	-45.4	0.00	30.97	68.2	-37.23	-	-	0	101	H
	6545 (Mid Channel)	6 + 16	* 1.265444	57.97	PK-U	29.2	-46.3	0.00	40.87	-	-	88.2	-47.33	360	200	V
			* 1.26584	46.56	ADR	29.2	-46.3	0.00	29.46	68.2	-38.74	-	-	360	200	H
			* 1.266369	46.57	ADR	29.2	-46.3	0.00	29.47	68.2	-38.73	-	-	360	200	V
			* 1.268515	58.33	PK-U	29.3	-46.3	0.00	41.33	-	-	88.2	-46.87	360	200	H
			* 3.733897	52.04	PK-U	33.4	-41.8	0.00	43.64	-	-	74	-30.36	360	101	H
			* 3.740874	40.55	ADR	33.4	-41.8	0.00	32.15	54	-21.85	-	-	360	200	V
			* 3.743025	40.25	ADR	33.4	-41.8	0.00	31.85	54	-22.15	-	-	360	101	H
			* 3.746962	52.31	PK-U	33.4	-41.8	0.00	43.91	-	-	74	-30.09	360	200	V
			13.090965	46.74	PK-U	39.1	-34.3	0.00	51.54	-	-	88.2	-36.66	360	200	V
			13.102301	47.19	PK-U	39.1	-34.5	0.00	51.79	-	-	88.2	-36.41	360	200	H
			13.106101	35.18	ADR	39.1	-34.5	0.00	39.78	68.2	-28.42	-	-	360	200	V
			13.111842	35.2	ADR	39.1	-34.5	0.00	39.8	68.2	-28.4	-	-	360	200	H
	7025 (High Channel)	6 + 16	* 1.26732	58.21	PK-U	29.3	-46.3	0.00	41.21	-	-	88.2	-46.99	0	200	H
			* 1.269368	46.52	ADR	29.3	-46.3	0.00	29.52	68.2	-38.68	-	-	0	200	V
			* 1.269617	58.28	PK-U	29.3	-46.4	0.00	41.18	-	-	88.2	-47.02	0	200	V
			* 1.269706	46.49	ADR	29.3	-46.4	0.00	29.39	68.2	-38.81	-	-	0	200	H
			* 11.926905	46.57	PK-U	38.6	-34.5	0.00	50.67	-	-	74	-23.33	0	200	V
			* 11.92805	35.21	ADR	38.6	-34.5	0.00	39.31	54	-14.69	-	-	0	200	H
			* 11.93568	46.93	PK-U	38.6	-34.4	0.00	51.13	-	-	74	-22.87	0	200	H
			* 11.959417	34.98	ADR	38.6	-34.6	0.00	38.98	54	-15.02	-	-	0	200	V
			* 4.538862	40.16	ADR	33.9	-41.2	0.00	32.86	54	-21.14	-	-	0	200	V
			* 4.552326	51.91	PK-U	33.9	-41.1	0.00	44.71	-	-	74	-29.29	0	200	H
			* 4.557192	40.32	ADR	33.9	-41.1	0.00	33.12	54	-20.88	-	-	0	200	H
			* 4.567414	52.72	PK-U	34	-41.1	0.00	45.62	-	-	74	-28.38	0	200	V
11be (Partial RU Mode / Highest PSD)	6145 (484+242T) (Low Channel)	6 + 16	* 4.59794	52.1	PK-U	34.2	-41	0.00	45.3	-	-	74	-28.7	0	199	H
			* 4.606575	40.35	ADR	34.1	-41	0.00	33.45	54	-20.55	-	-	0	199	H
			* 4.598882	51.51	PK-U	34.1	-41	0.00	44.61	-	-	74	-29.39	0	199	V
			* 4.60577	40.17	ADR	34.1	-41	0.00	33.27	54	-20.73	-	-	0	199	V
			* 11.579958	46.66	PK-U	38.3	-34.9	0.00	50.06	-	-	74	-23.94	0	101	H
			* 11.545655	35.04	ADR	38.2	-35.4	0.00	37.84	54	-16.16	-	-	0	101	H
			* 11.558596	47.58	PK-U	38.3	-35.4	0.00	50.48	-	-	74	-23.52	0	200	V
			* 11.556994	35.58	ADR	38.3	-35.4	0.00	38.48	54	-15.52	-	-	0	200	V
			2.107217	56.62	PK-U	31.4	-45.4	0.00	42.62	-	-	88.2	-45.58	0	199	V
			2.107857	44.98	ADR	31.4	-45.4	0.00	30.98	68.2	-37.22	-	-	0	199	V
			2.109675	44.82	ADR	31.4	-45.4	0.00	30.82	68.2	-37.38	-	-	0	199	H
			2.111705	56.29	PK-U	31.4	-45.4	0.00	42.29	-	-	88.2	-45.91	0	199	H
	6545 (484+242T) (Mid Channel)	6 + 16	* 3.754239	56.06	PK-U	32.9	-46.03	0.00	42.93	-	-	74	-31.07	0	101	H
			* 3.737703	44.55	ADR	32.9	-46.17	0.00	31.28	54	-22.72	-	-	0	101	H
			* 3.735002	56.57	PK-U	32.9	-46.15	0.00	43.32	-	-	74	-30.68	0	101	V
			* 3.739654	44.56	ADR	32.9	-46.12	0.00	31.34	54	-22.66	-	-	0	101	V
			* 12.331736	55.72	PK-U	38.9	-42.81	0.00	51.81	-	-	74	-22.19	0	101	H
			* 12.34337	43.83	ADR	38.9	-42.24	0.00	40.49	54	-13.51	-	-	0	101	H
			* 12.326532	55.69	PK-U	38.9	-42.95	0.00	51.64	-	-	74	-22.36	0	101	V
			* 12.337615	43.79	ADR	38.9	-42.61	0.00	40.08	54	-13.92	-	-	0	101	V
			2.58786	47.36	ADR	32.4	-48.66	0.00	31.1	68.2	-37.1	-	-	0	101	V
			2.591345	63.22	PK-U	32.4	-48.73	0.00	46.89	-	-	88.2	-41.31	0	199	H
			2.591816	47.34	ADR	32.4	-48.73	0.00	31.01	68.2	-37.19	-	-	0	199	H
			2.596997	60.61	PK-U	32.4	-48.75	0.00	44.26	-	-	88.2	-43.94	0	101	V
	7025 (484+242T) (High Channel)	6 + 16	* 11.548362	55.48	PK-U	38.3	-42.44	0.00	51.34	-	-	74	-22.66	360	101	H
			* 11.520801	43.68	ADR	38.3	-42.74	0.00	39.24	54	-14.76	-	-	360	101	H
			* 11.547758	55.47	PK-U	38.3	-42.4	0.00	51.37	-	-	74	-22.63	360	101	V
			* 11.527236	43.77	ADR	38.3	-42.52	0.00	39.55	54	-14.45	-	-	360	101	V
			3.106706	45.47	ADR	32.8	-46.83	0.00	31.44	68.2	-36.76	-	-	360	101	V
			3.109972	57.33	PK-U	32.8	-46.79	0.00	43.34	-	-	88.2	-44.86	360	199	H
			3.122851	45.67	ADR	32.8	-46.75	0.00	31.72	68.2	-36.48	-	-	360	199	H
			3.1378	57.73	PK-U	32.9	-46.62	0.00	44.01	-	-	88.2	-44.19	360	101	V
			13.523796	45.36	ADR	39.5	-44.25	0.00	40.61	68.2	-27.59	-	-	360	200	H
			13.541787	57.08	PK-U	39.5	-44.21	0.00	52.37	-	-	88.2	-35.83	360	200	H
			13.555053	57.29	PK-U	39.5	-44.17	0.00	52.62	-	-	88.2	-35.58	360	101	V
			13.555285	45.23	ADR	39.5	-44.15	0.00	40.58	68.2	-27.62	-	-	360	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

160MHz

UNII-5.8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode)	6185 (Low Channel)	6 + 16	* 11.893437	54.71	PK-U	38.6	-41.9	0	51.41	-	-	74	-22.59	0	101	H
			* 11.880242	42.63	ADR	38.6	-41.8	0	39.43	54	-14.57	-	-	0	101	H
			* 11.891713	54.16	PK-U	38.6	-41.9	0	50.86	-	-	74	-23.14	0	101	V
			* 11.897156	42.58	ADR	38.6	-41.9	0	39.28	54	-14.72	-	-	0	101	V
			1.787653	61.8	PK-U	30.4	-48.7	0	43.5	-	-	88.2	-44.7	0	101	H
			1.794604	49.71	ADR	30.4	-48.64	0	31.47	68.2	-36.73	-	-	0	101	H
			1.795713	49.63	ADR	30.4	-48.6	0	31.43	68.2	-36.77	-	-	0	200	V
			1.79593	61.56	PK-U	30.4	-48.6	0	43.36	-	-	88.2	-44.84	0	200	V
			16.681218	42.16	ADR	41.8	-38.3	0	45.66	68.2	-22.54	-	-	0	200	H
			16.683986	53.77	PK-U	41.8	-38.3	0	57.27	-	-	88.2	-30.93	0	200	V
			16.695809	54.33	PK-U	41.8	-38.48	0	57.65	-	-	88.2	-30.55	0	200	H
			16.699408	41.95	ADR	41.9	-38.46	0	45.39	68.2	-22.81	-	-	0	200	V
	6505 (Mid Channel)	6 + 16	* 11.700348	54.53	PK-U	38.4	-42.1	0	50.83	-	-	74	-23.17	0	200	H
			* 11.728329	42.76	ADR	38.5	-42.2	0	39.06	54	-14.94	-	-	0	200	H
			* 11.717034	54.83	PK-U	38.5	-42.2	0	51.13	-	-	74	-22.87	0	200	V
			* 11.733108	42.84	ADR	38.5	-42.1	0	39.24	54	-14.76	-	-	0	200	V
			2.98917	58.7	PK-U	32.9	-47.5	0	44.1	-	-	88.2	-44.1	0	200	V
			2.996817	58.94	PK-U	32.9	-47.5	0	44.34	-	-	88.2	-43.86	0	101	H
			2.997085	47.02	ADR	32.9	-47.5	0	32.42	68.2	-35.78	-	-	0	200	V
			2.997896	47.2	ADR	32.9	-47.5	0	32.6	68.2	-35.6	-	-	0	101	H
			16.897844	53	PK-U	41.8	-38.62	0	56.18	-	-	88.2	-32.02	0	200	H
			16.898412	41.54	ADR	41.8	-38.6	0	44.74	68.2	-23.46	-	-	0	200	V
			16.911011	41.64	ADR	41.7	-38.6	0	44.74	68.2	-23.46	-	-	0	200	H
			16.917182	52.99	PK-U	41.7	-38.6	0	56.09	-	-	88.2	-32.11	0	200	V
	6985 (High Channel)	6 + 16	* 12.150112	54.17	PK-U	38.8	-42	0	50.97	-	-	74	-23.03	360	200	H
			* 12.161827	42.7	ADR	38.8	-42.1	0	39.4	54	-14.6	-	-	360	200	H
			* 12.138078	54.43	PK-U	38.8	-41.99	0	51.24	-	-	74	-22.76	360	101	V
			* 12.153172	42.74	ADR	38.8	-42.08	0	39.46	54	-14.54	-	-	360	101	V
			2.968259	47.2	ADR	32.9	-47.5	0	32.6	68.2	-35.6	-	-	360	101	V
			2.975065	58.75	PK-U	33	-47.31	0	44.44	-	-	88.2	-43.76	360	200	H
			2.993729	47.14	ADR	32.9	-47.5	0	32.54	68.2	-35.66	-	-	360	200	H
			3.001237	59	PK-U	32.9	-47.52	0	44.38	-	-	88.2	-43.82	360	101	V
			16.84827	54.35	PK-U	41.9	-38.8	0	57.45	-	-	88.2	-30.75	360	200	V
			16.857369	41.92	ADR	41.8	-38.86	0	44.86	68.2	-23.34	-	-	360	200	H
			16.868152	53.84	PK-U	41.8	-38.8	0	56.84	-	-	88.2	-31.36	360	200	H
			16.870196	41.77	ADR	41.8	-38.8	0	44.77	68.2	-23.43	-	-	360	200	V
11be (Partial RU Mode)	6185 (996+484T) (Low Channel)	6 + 16	1.993293	56.36	PK-U	31	-45.6	0	41.76	-	-	88.2	-46.44	0	199	V
			1.995595	56.55	PK-U	31	-45.6	0	41.95	-	-	88.2	-46.25	0	199	H
			1.998724	44.83	ADR	31	-45.6	0	30.23	68.2	-37.97	-	-	0	199	H
			1.999719	44.74	ADR	30.9	-45.6	0	30.04	68.2	-38.16	-	-	0	199	V
			9.973732	47.94	PK-U	37	-36.7	0	48.24	-	-	88.2	-39.96	0	200	V
			9.975261	36.03	ADR	37	-36.8	0	36.23	68.2	-31.97	-	-	0	200	V
			9.979918	36.03	ADR	37	-36.7	0	36.33	68.2	-31.87	-	-	0	200	H
			9.994126	48.23	PK-U	37.1	-36.7	0	48.63	-	-	88.2	-39.57	0	200	H
			16.612852	33.64	ADR	41.5	-33.1	0	42.04	68.2	-26.16	-	-	0	101	V
			16.616607	33.93	ADR	41.5	-33.1	0	42.33	68.2	-25.87	-	-	0	200	H
			16.623682	45.25	PK-U	41.5	-33.1	0	53.65	-	-	88.2	-34.55	0	101	V
			16.634298	45.28	PK-U	41.6	-33.1	0	53.78	-	-	88.2	-34.42	0	200	H
	6505 (996+484T) (Mid Channel)	6 + 16	1.776212	57.42	PK-U	30.4	-46	0	41.82	-	-	88.2	-46.38	0	101	H
			1.777817	45.59	ADR	30.4	-46	0	29.99	68.2	-38.21	-	-	0	200	V
			1.77955	57.29	PK-U	30.4	-46	0	41.69	-	-	88.2	-46.51	0	200	V
			1.780043	45.52	ADR	30.4	-46	0	29.92	68.2	-38.28	-	-	0	101	H
			3.006283	53.55	PK-U	32.7	-42.5	0	43.75	-	-	88.2	-44.45	0	101	V
			3.012331	53.27	PK-U	32.8	-42.5	0	43.57	-	-	88.2	-44.63	0	200	H
			3.013105	41.89	ADR	32.8	-42.5	0	32.19	68.2	-36.01	-	-	0	200	H
			3.016242	41.61	ADR	32.8	-42.5	0	31.91	68.2	-36.29	-	-	0	101	V
			10.022365	47.47	PK-U	37.2	-36.7	0	47.97	-	-	88.2	-40.23	0	200	V
			10.042692	47.52	PK-U	37.2	-36.8	0	47.92	-	-	88.2	-40.28	0	101	H
			10.047745	35.92	ADR	37.2	-36.7	0	36.42	68.2	-31.78	-	-	0	101	H
			10.05557	36.19	ADR	37.2	-36.7	0	36.69	68.2	-31.51	-	-	0	200	V
	6985 (996+484T) (High Channel)	6 + 16	1.884636	57.21	PK-U	31.2	-45.5	0	42.91	-	-	88.2	-45.29	0	200	H
			1.885858	44.98	ADR	31.2	-45.4	0	30.78	68.2	-37.42	-	-	0	101	V
			1.88752	45.06	ADR	31.2	-45.4	0	30.86	68.2	-37.34	-	-	0	200	H
			1.889724	56.27	PK-U	31.1	-45.4	0	41.97	-	-	88.2	-46.23	0	101	V
			3.078694	40.66	ADR	33	-42.1	0	31.56	68.2	-36.64	-	-	0	200	V
			3.080756	52.58	PK-U	33	-42.1	0	43.48	-	-	88.2	-44.72	0	200	H
			3.082987	40.59	ADR	33	-42.1	0	31.49	68.2	-36.71	-	-	0	200	H
			3.085284	52.85	PK-U	33	-42.1	0	43.75	-	-	88.2	-44.45	0	200	V
			10.163294	47.98	PK-U	37.4	-36.8	0	48.58	-	-	88.2	-39.62	0	101	H
			10.17228	48.1	PK-U	37.4	-36.8	0	48.7	-	-	88.2	-39.5	0	200	V
			10.178764	36.76	ADR	37.4	-36.8	0	37.36	68.2	-30.84	-	-	0	200	V
			10.178812	36.24	ADR	37.4	-36.8	0	36.84	68.2	-31.36	-	-	0	101	H



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

WORST-CASE HARMONICS AND SPURIOUS EMISSIONS

802.11be EHT20 / 229 & 7095MHz / 2TX CDD / RU 106 / Index 54:

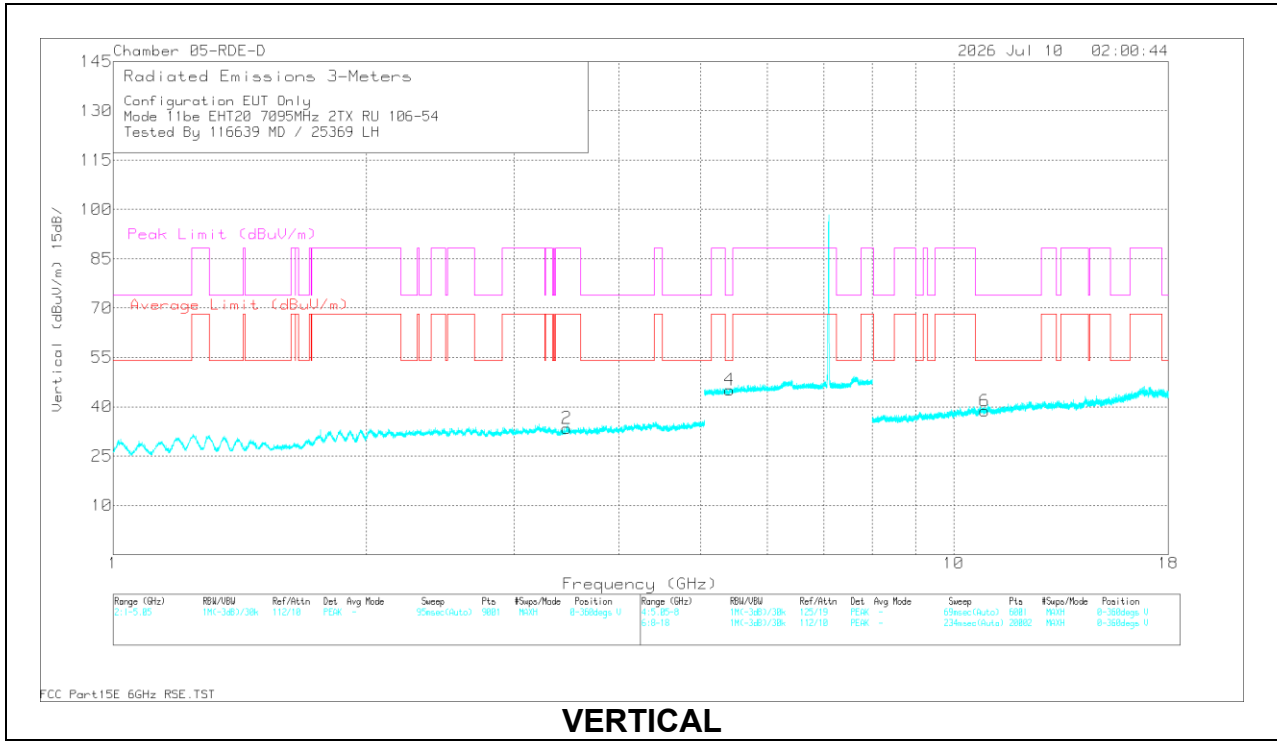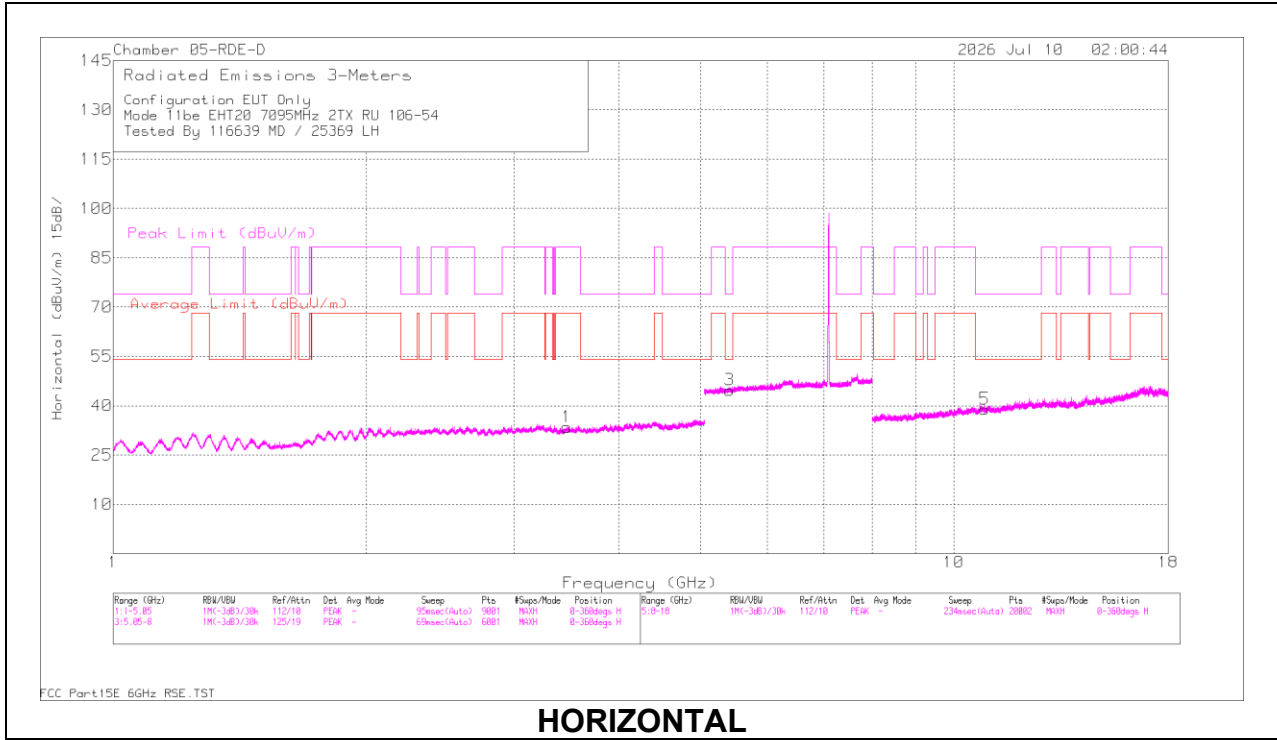

RADIATED EMISSIONS



Frequency (GHz)	Meter Reading (dBuV)	Det	81887 ACF (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 5.416446	55.89	PK-U	34.6	0	-35.27	55.22	-	-	74	-18.78	360	101	H
* 5.401122	43.86	ADR	34.5	0	-35.25	43.11	54	-10.89	-	-	360	101	H
* 5.41258	55.87	PK-U	34.6	0	-35.24	55.23	-	-	74	-18.77	360	101	V
* 5.420492	43.89	ADR	34.6	0	-35.23	43.26	54	-10.74	-	-	360	101	V
* 10.875429	54.77	PK-U	37.7	0	-43.12	49.35	-	-	74	-24.65	360	101	H
* 10.875085	42.93	ADR	37.7	0	-43.12	37.51	54	-16.49	-	-	360	101	H
* 10.87882	54.75	PK-U	37.7	0	-43.17	49.28	-	-	74	-24.72	360	101	V
* 10.877125	43.06	ADR	37.7	0	-43.14	37.62	54	-16.38	-	-	360	101	V
3.461283	44.17	ADR	32.8	0	-45.14	31.83	68.2	-36.37	-	-	360	101	V
3.46338	56.12	PK-U	32.8	0	-45.16	43.76	-	-	88.2	-44.44	360	101	V
3.465574	55.8	PK-U	32.9	0	-45.14	43.56	-	-	88.2	-44.64	360	101	H
3.467956	44.1	ADR	32.9	0	-45.09	31.91	68.2	-36.29	-	-	360	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.3. WORST CASE BELOW 1 GHz

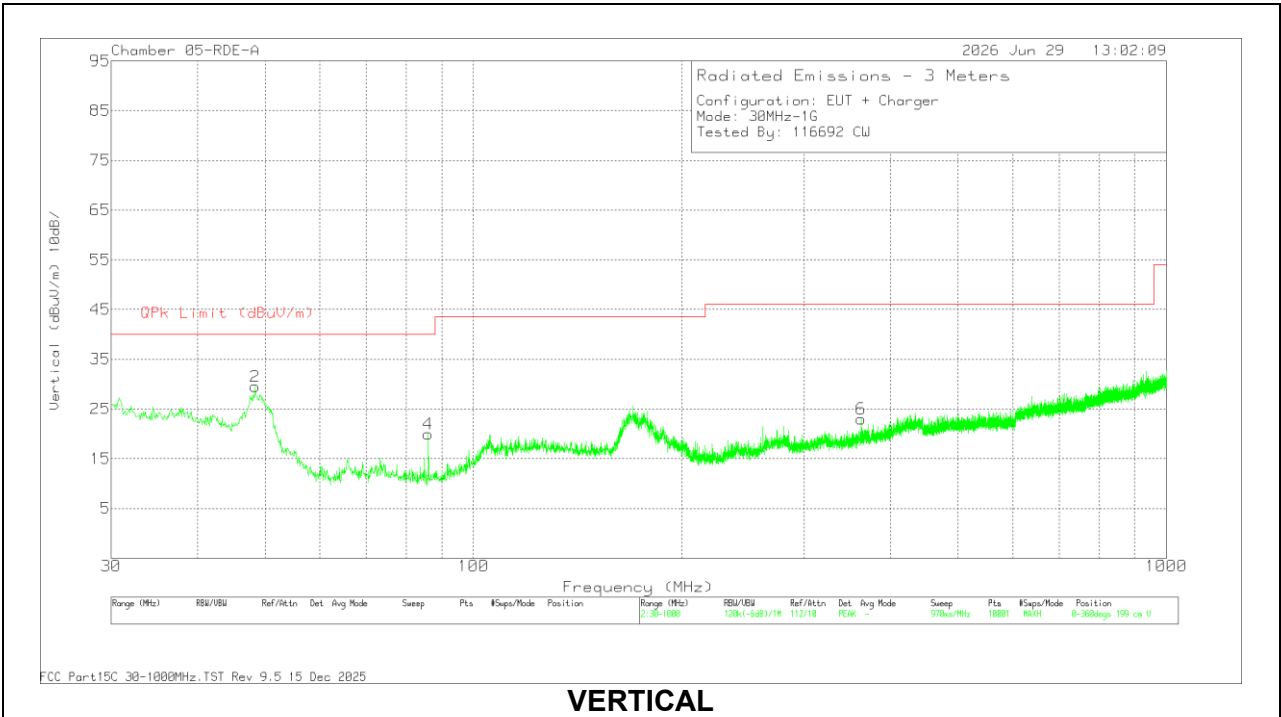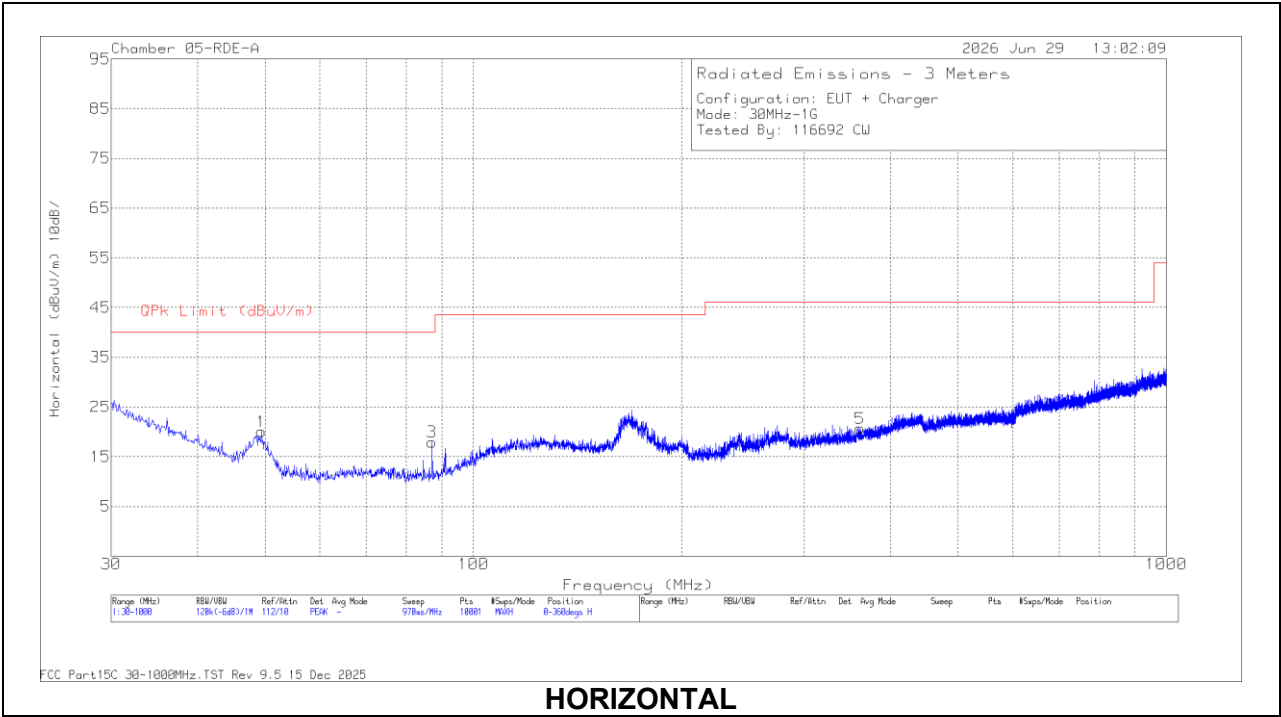



RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	204045 ACF (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	49.4	20.96	Qp	14	-32.1	2.86	40	-37.14	68	398	H
2	48.43	29.59	Qp	14.3	-32.1	11.79	40	-28.21	68	101	V
3	87.133	36.36	Pk	13.3	-31.7	17.96	40	-22.04	0-360	199	H
4	86.066	38.34	Pk	13.3	-31.7	19.94	40	-20.06	0-360	199	V
5	360.867	30.55	Pk	20.6	-30.5	20.65	46.02	-25.37	0-360	299	H
6	363.001	32.89	Pk	20.7	-30.6	22.99	46.02	-23.03	0-360	101	V

Pk - Peak detector

Qp - Quasi-Peak detector

1.4. WORST CASE 18-26 GHz

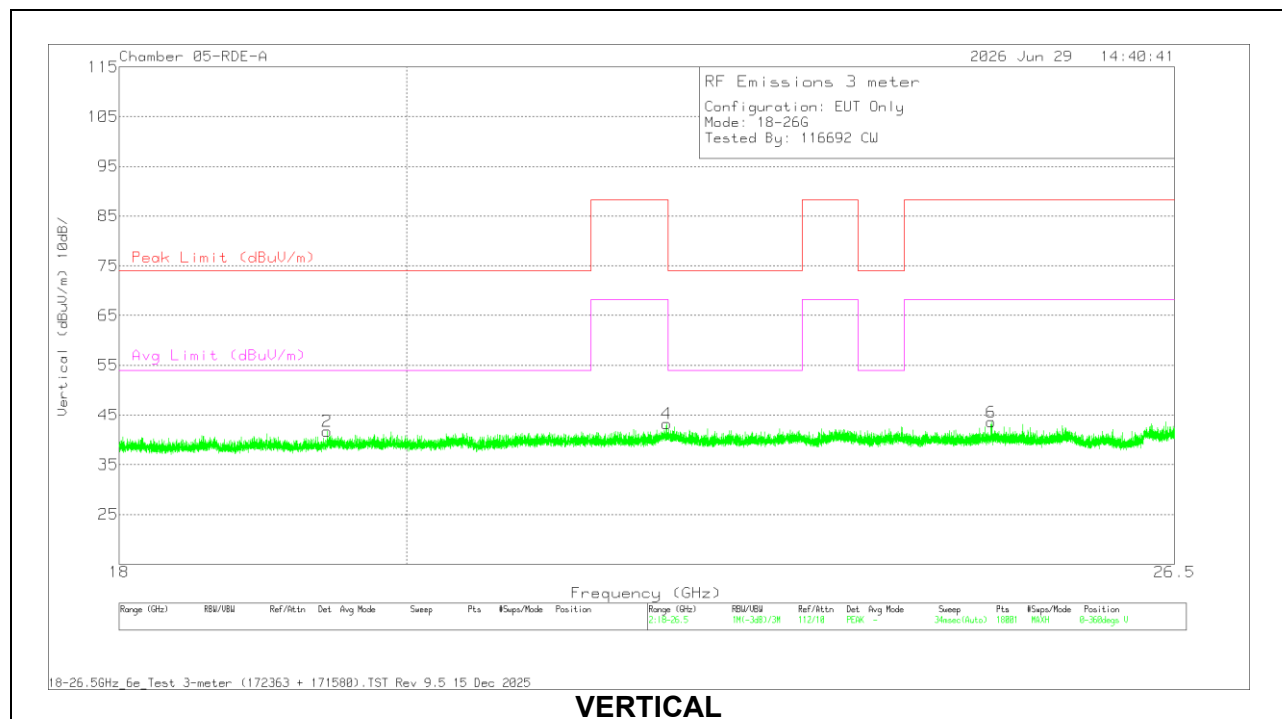
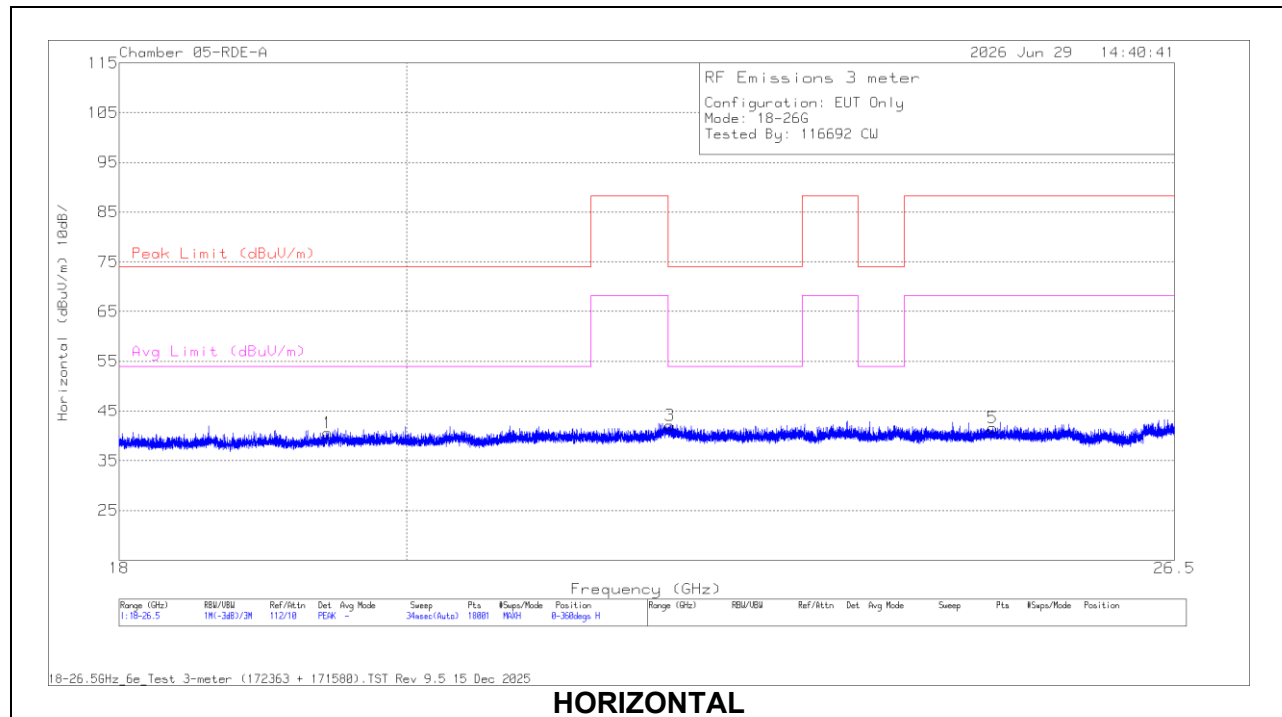


RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	172363 ACF (dB/m)	CBL/AMP (dB)	CBL (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Avg Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 19.427999	56.66	Pk	32.4	-63.3	14.8	40.56	74	-33.44	54	-13.44	0-360	199	H
3	* 22.023804	56.4	Pk	33.1	-63.2	15.8	42.1	74	-31.9	54	-11.9	0-360	101	H
2	* 19.426583	57.85	Pk	32.4	-63.3	14.8	41.75	74	-32.25	54	-12.25	0-360	101	V
4	22.000193	57.48	Pk	33.1	-63.1	15.8	43.28	88.2	-44.92	-	-	0-360	200	V
6	24.777802	55.95	Pk	33.7	-62.8	16.7	43.55	88.2	-44.65	-	-	0-360	101	V
5	24.79433	53.97	Pk	33.7	-62.8	16.7	41.57	88.2	-46.63	-	-	0-360	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector

1.5. WORST CASE 26-40 GHz

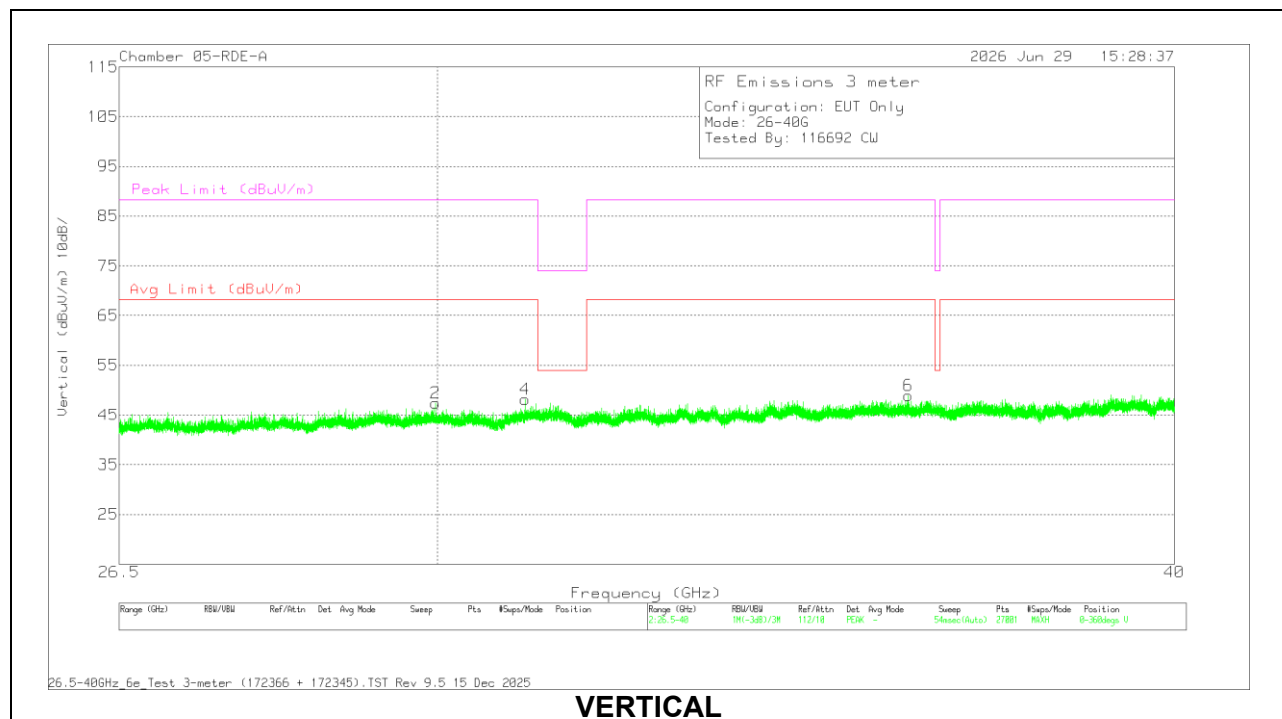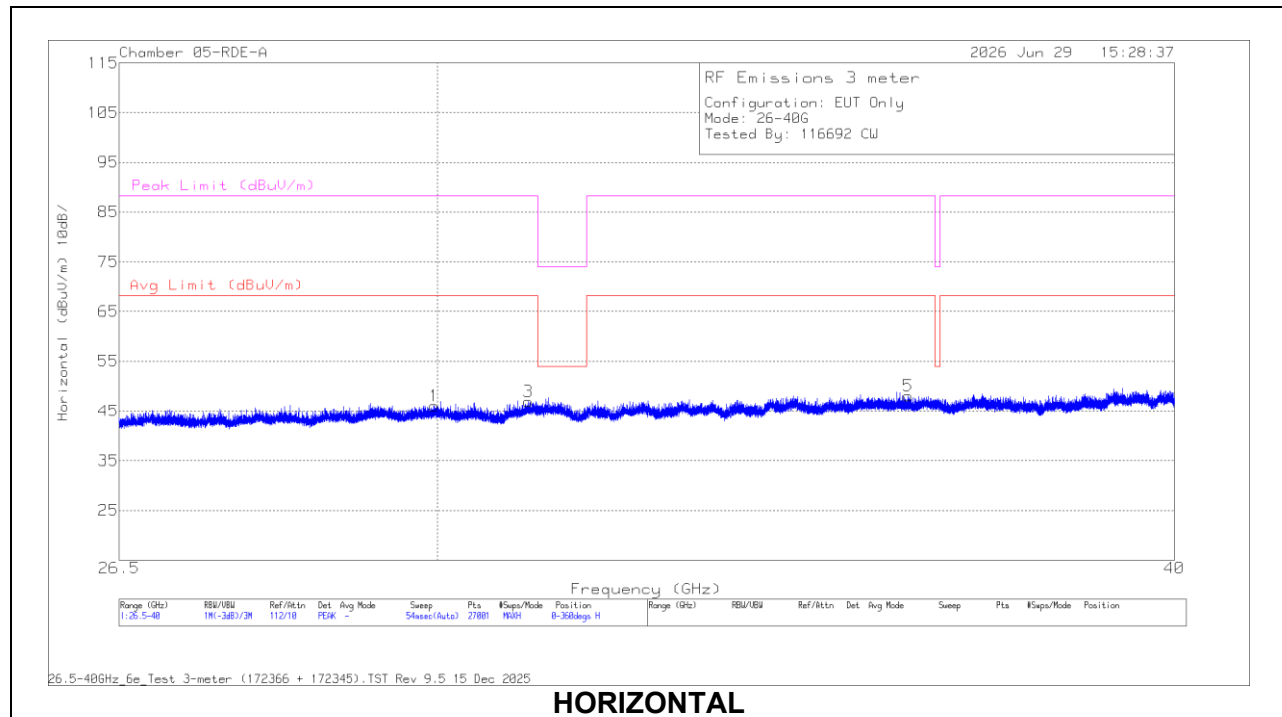

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	172366 ACF (dB/m)	CBL/AMP (dB)	CBL (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	AVG Limit (dBuV/m)	AVG Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	29.9645	59.95	Pk	36.4	-69	18.7	46.05	88.2	-42.15	-	-	0-360	200	H
2	29.9785	61.33	Pk	36.4	-69	18.7	47.43	88.2	-40.77	-	-	0-360	101	V
4	31.0455	60.62	Pk	36.4	-68.1	19.2	48.12	88.2	-40.08	-	-	0-360	200	V
3	31.0855	59.24	Pk	36.5	-68	19.2	46.94	88.2	-41.26	-	-	0-360	200	H
5	36.048	61.25	Pk	37.5	-72.3	21.6	48.05	88.2	-40.15	-	-	0-360	101	H
6	36.0555	62.07	Pk	37.4	-72.3	21.7	48.87	88.2	-39.33	-	-	0-360	101	V

Pk - Peak detector

2. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 8.8

Frequency of Emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

TEST PROCEDURE

ANSI C63.10, Section 6.2

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.


The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both HOT(L1) and NEUTRAL(L2) lines.

RESULTS

2.1. EUT WITH AC ADAPTER

LINE 1 RESULTS

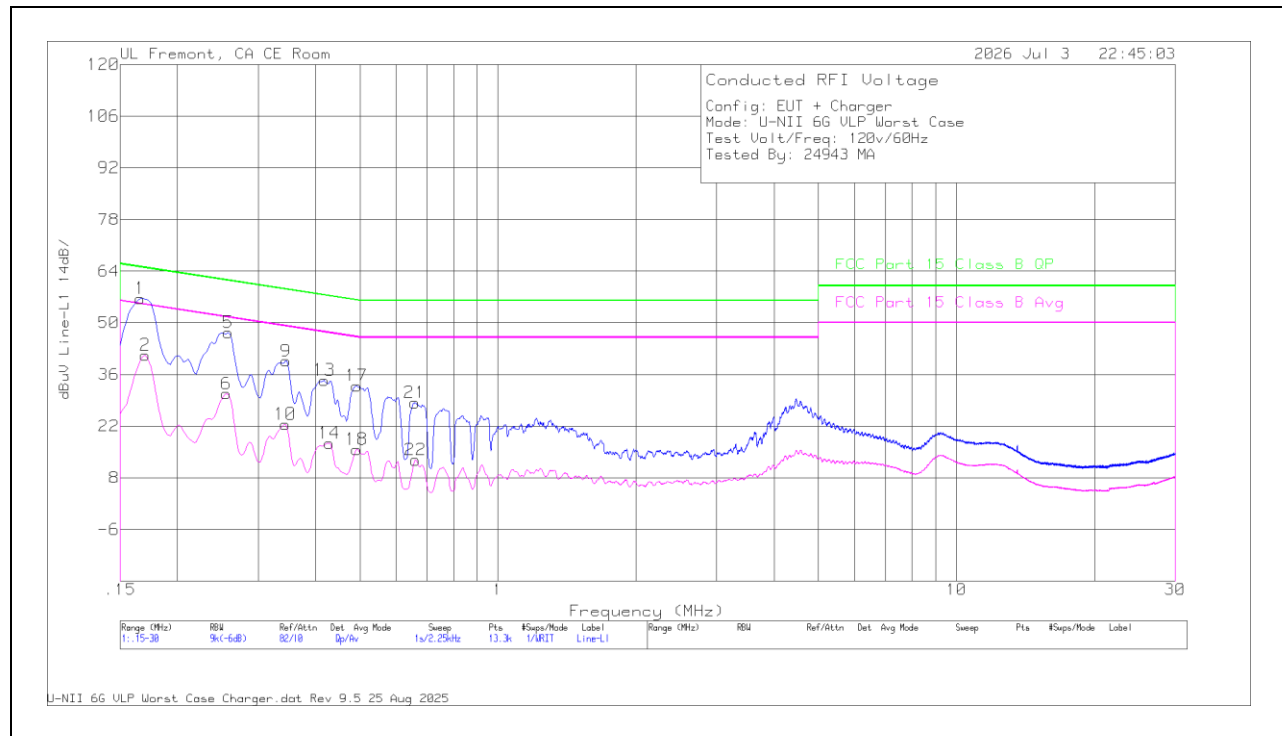


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	175764 LISN L1 (dB)	Line 1 202326, C3 202322, C1 202326-10d(dB)	Corrected Reading dBuV	FCC Part 15 Class B QP(dB)	QP Margin (dB)	FCC Part 15 Class B Avg(dB)	Av Margin (dB)
1	.1658	46.4	Qp	.1	10.1	56.6	65.17	-8.57	-	-
2	.1703	31.02	Av	.1	10.1	41.22	-	-	54.95	-13.73
5	.258	37.35	Qp	0	10	47.35	61.5	-14.15	-	-
6	.2558	20.68	Av	0	10.1	30.78	-	-	51.57	-20.79
9	.3446	29.54	Qp	0	10.1	39.64	59.09	-19.45	-	-
10	.3435	12.39	Av	0	10.1	22.49	-	-	49.12	-26.63
13	.4178	24.32	Qp	0	10.1	34.42	57.49	-23.07	-	-
14	.429	7.27	Av	0	10.1	17.37	-	-	47.27	-29.9
17	.492	22.81	Qp	0	10.1	32.91	56.13	-23.22	-	-
18	.492	5.57	Av	0	10.1	15.67	-	-	46.13	-30.46
21	.6585	18.25	Qp	0	10.1	28.35	56	-27.65	-	-
22	.6608	2.71	Av	0	10.1	12.81	-	-	46	-33.19

Qp - Quasi-Peak detector

Av - Average detection

LINE 2 RESULTS

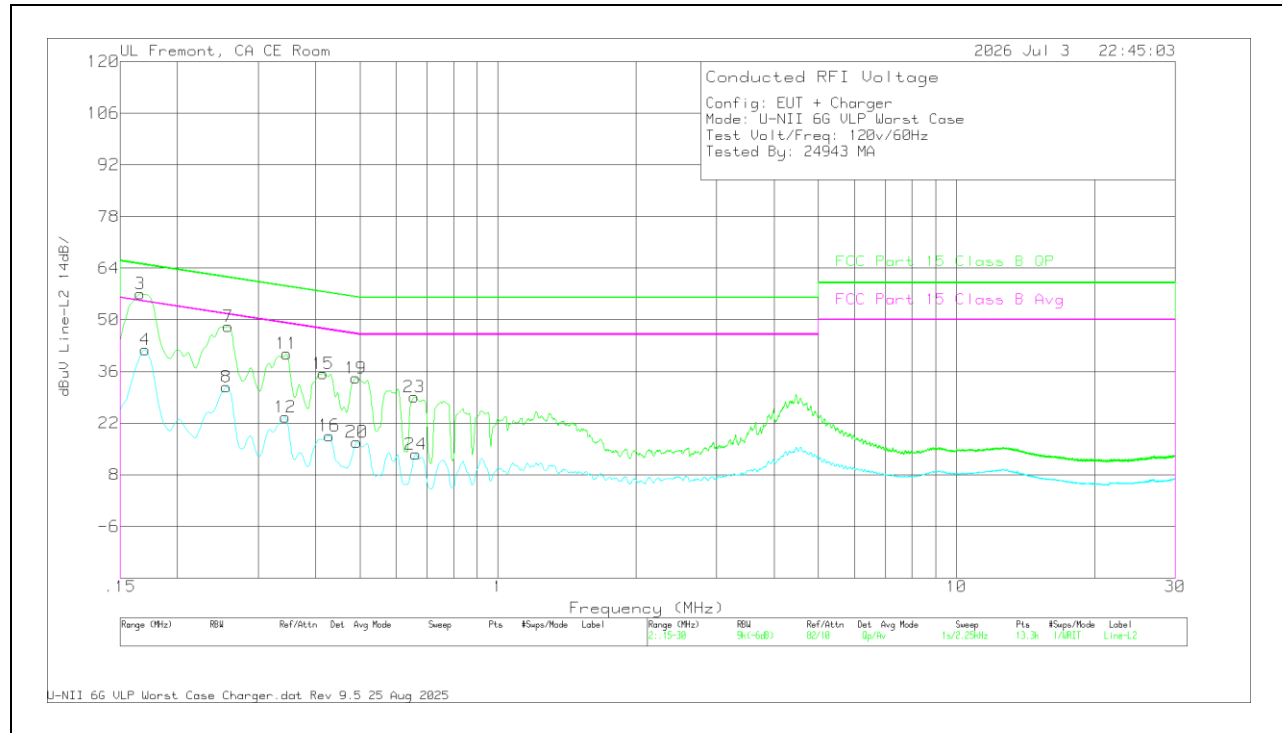


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	175764 LISN L2 (dB)	Line 2 202327, C3 202322, C2 202327, -10(dB)	Corrected Reading dBuV	FCC Part 15 Class B QP(dB)	QP Margin (dB)	FCC Part 15 Class B Avg(dB)	Av Margin (dB)
3	.1658	46.84	Qp	.1	10.1	57.04	65.17	-8.13	-	-
4	.1703	31.65	Av	.1	10.1	41.85	-	-	54.95	-13.1
7	.258	38.08	Qp	0	10.1	48.18	61.5	-13.32	-	-
8	.2558	21.69	Av	0	10.1	31.79	-	-	51.57	-19.78
11	.3458	30.68	Qp	0	10.1	40.78	59.06	-18.28	-	-
12	.3435	13.5	Av	0	10.1	23.6	-	-	49.12	-25.52
15	.4155	25.28	Qp	0	10.1	35.38	57.54	-22.16	-	-
16	.429	8.47	Av	0	10.1	18.57	-	-	47.27	-28.7
19	.4898	24.07	Qp	0	10.1	34.17	56.17	-22	-	-
20	.492	6.77	Av	0	10.1	16.87	-	-	46.13	-29.26
23	.6563	18.98	Qp	0	10.1	29.08	56	-26.92	-	-
24	.6619	3.44	Av	0	10.1	13.54	-	-	46	-32.46

Qp - Quasi-Peak detector

Av - Average detection

2.2. EUT WITH LAPTOP

LINE 1 RESULTS

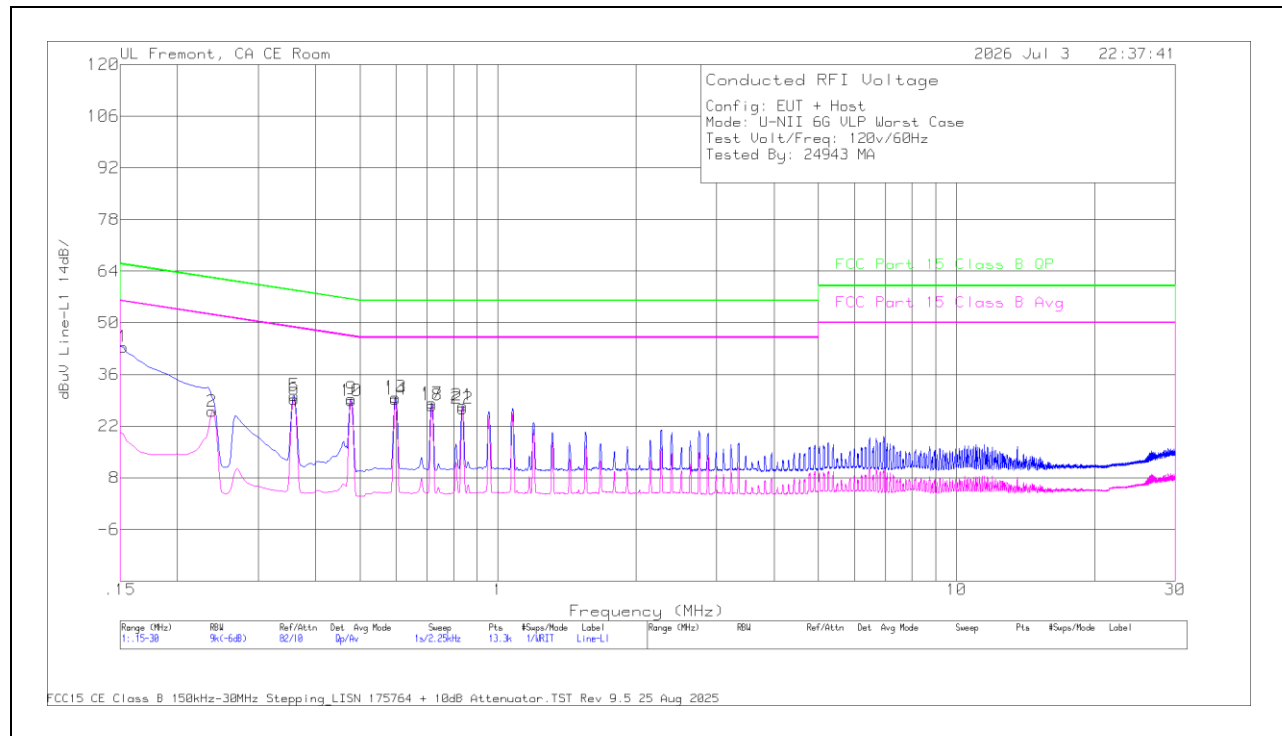


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	175764 LISN L1 (dB)	Line 1 202326, C3 202322, C1 202326 - 10d(dB)	Corrected Reading dBuV	FCC Part 15 Class B QP(dB)	QP Margin (dB)	FCC Part 15 Class B Avg(dB)	Av Margin (dB)
1	.1523	33.3	Qp	.1	10.1	43.5	65.88	-22.38	-	-
2	.2378	15.88	Av	0	10.1	25.98	-	-	52.17	-26.19
5	.3593	20.2	Qp	0	10.1	30.3	58.75	-28.45	-	-
6	.3593	19.21	Av	0	10.1	29.31	-	-	48.75	-19.44
9	.4785	19.39	Qp	0	10.1	29.49	56.37	-26.88	-	-
10	.4785	18.81	Av	0	10.1	28.91	-	-	46.37	-17.46
13	.5978	19.75	Qp	0	10.1	29.85	56	-26.15	-	-
14	.5978	19.17	Av	0	10.1	29.27	-	-	46	-16.73
17	.717	18.14	Qp	0	10.1	28.24	56	-27.76	-	-
18	.717	17.53	Av	0	10.1	27.63	-	-	46	-18.37
21	.8363	17.54	Qp	0	10.1	27.64	56	-28.36	-	-
22	.8363	16.71	Av	0	10.1	26.81	-	-	46	-19.19

Qp - Quasi-Peak detector

Av - Average detection

LINE 2 RESULTS

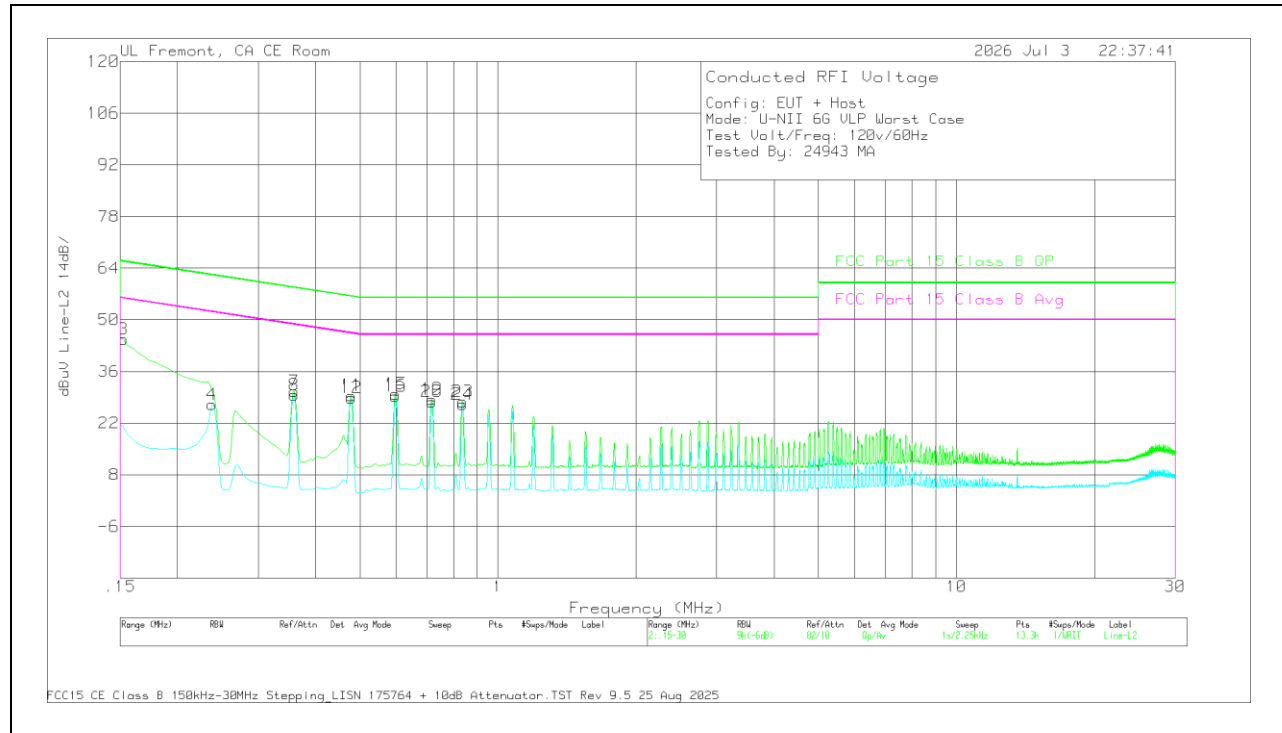

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	175764 LISN L2 (dB)	Line 2 202327, C3 202322, C2 202327, -10(dB)	Corrected Reading dBuV	FCC Part 15 Class B QP(dB)	QP Margin (dB)	FCC Part 15 Class B Avg(dB)	Av Margin (dB)
3	.1523	34.53	Qp	.1	10.1	44.73	65.88	-21.15	-	-
4	.2378	16.83	Av	.1	10.1	27.03	-	-	52.17	-25.14
7	.3593	20.51	Qp	0	10.1	30.61	58.75	-28.14	-	-
8	.3593	19.51	Av	0	10.1	29.61	-	-	48.75	-19.14
11	.4785	19.35	Qp	0	10.1	29.45	56.37	-26.92	-	-
12	.4785	18.74	Av	0	10.1	28.84	-	-	46.37	-17.53
15	.5978	19.78	Qp	0	10.1	29.88	56	-26.12	-	-
16	.5978	19.18	Av	0	10.1	29.28	-	-	46	-16.72
19	.717	18.32	Qp	0	10.1	28.42	56	-27.58	-	-
20	.717	17.71	Av	0	10.1	27.81	-	-	46	-18.19
23	.8363	17.75	Qp	0	10.1	27.85	56	-28.15	-	-
24	.8363	16.95	Av	0	10.1	27.05	-	-	46	-18.95

Qp - Quasi-Peak detector

Av - Average detection

3. SPOT CHECK EVALUATION

3.1. MODEL DIFFERENCES

The manufacturer hereby declares the following for models A3472, A3713, A3714 and A3715.

These models have the same PCB layout, design, common components, antennas, antenna locations and housing cases, except for FR2 is removed from variants and disabled/enabled cellular bands via software as shown below.

Model	FCC ID	IC ID	Feature Difference	Sim Support	Reference Model
A3472	BCG-E9186A	579C-E9186A	-With FR2 -No LTE B11, B21	eSIM	-
A3713	BCG-E9192A	579C-E9192A	-Without FR2 -Added LTE B11, B21	eSIM	A3472
A3714	BCG-E9193A	579C-E9193A	-Without FR2 -No LTE/5GNR B14, B29, B71 -No LTE B11, B21	eSIM	A3713
A3715	BCG-E9194A	579C-E9194A	-Without FR2 -No LTE/5GNR B14, B29, B71, B53 -No LTE B11, B21, MSS	pSIM+pSIM	

Note:

- All Models use the same System, Cellular and Connectivity radio electrical schematics.
- Removal of LTE/ 5GNR bands on models either done by software or de-population of related components. For models without FR2 may have different antenna gains on certain bands. Please refer to data reuse test plan for details.
- All Models use the same Applications Processor and PMU.
- All Models use the same UICC hardware/software interface.
- All Models run the same Baseband firmware and iOS software.

The spot check plan allows for data reuse from the reference model where the variant model data meets the limits and has not changed by more than the criteria from KDB 484596 D01 v03 equation (4).

$$d_{dBmax}(M_{dB}) = \begin{cases} (3 + M_{dB}/20) \text{ dB} & , \text{ for } 0 \leq M_{dB} \leq 60 \text{ dB} \\ 6 \text{ dB} & , \text{ for } M_{dB} > 60 \text{ dB} \end{cases} \quad (4)$$

Where: d_{dB} deviation from Reference data, V_{dB} variant spot check level, and R_{dB} measurement level

3.2. SPOT CHECK VERIFICATION RESULTS SUMMARY FOR A3713

A3472 SPOT CHECK RESULTS												
Equipment Class / Technology	Frequency (GHz)	Mode	Data Rate	Test Item		Channel	Measured Frequency (GHz)	Parent Model: A3472	Sub Model: A3713	Delta (dB)	Margin	Remarks
								FCC ID : BCG-E9186A IC : 579C-E9186A	FCC ID : BCG-E9192A IC : 579C-E9192A			
6CD / 6VL UNII-5 / 6 / 7 / 8	5925 - 6425 UNII-5	11be EHT160 SU (Ant 16)	MCS0	Avg Power (dBm)	Fundamental LP	47	6.185	17.83	17.82	-0.01	-6.17	Note 1
	5925 - 6425 UNII-5	11be EHT20 SU (Ant 16)	MCS0	Avg Power (dBm)	Fundamental SP	1	5.955	19.05	19.01	-0.04	-10.95	Note 1
	5925 - 6425 UNII-5	11be EHT160 SU (Ant 16)	MCS11	Radiated Bandedge (dBm)	Horizontal Low Bandedge	15	5.919268	-29.62	-32.37	-2.75	-2.62	Note 1
	6425-6875 UNII-7	11be EHT160 SU (Ant 16)	MCS0	Avg Power (dBm)	Fundamental VLP	175	6.825	12.95	12.93	-0.02	-1.05	Note 1
	6875-7125 UNII-8	11be EHT160 SU (Ant 16)	MCS0	Avg Power (dBm)	Fundamental VLP	207	6.985	12.86	12.85	-0.01	-1.14	Note 1
	6875-7125 UNII-8	11be EHT160 SU (Ant 16)	MCS11	Radiated Bandedge (dBm)	Horizontal Low Bandedge Dual	207	7.127868	-30.26	-32.54	-2.28	-3.26	Note 1

Note 1: Deviation from reference to variant within the value allowed by equation (4) in KDB 484596. Additional tests not required.

Note 2: Deviation from reference to variant exceeds the value allowed by equation (4) in KDB 484596. Additional tests performed on second channel.

3.3. SPOT CHECK VERIFICATION RESULTS SUMMARY FOR A3714

A3714 SPOT CHECK RESULTS												
Equipment Class / Technology	Frequency (GHz)	Mode	Data Rate	Test Item		Channel	Measured Frequency (GHz)	Sub Model: A3713	Sub Model: A3714	Delta (dB)	Margin	Remarks
								FCC ID : BCG-E9192A IC : 579C-E9192A	FCC ID : BCG-E9193A IC : 579C-E9193A			
6CD / 6VL UNII-5 / 6 / 7 / 8	5925 - 6425 UNII-5	11be EHT160 SU (SDM)	MCS0	Avg Power (dBm)	Fundamental LP	47	6.185	17.96	17.95	-0.01	-6.04	Note 1
	5925 - 6425 UNII-5	11be EHT40 SU (CDD)	MCS0	Avg Power (dBm)	Fundamental SP	3	5.965	20.45	20.42	-0.03	-9.55	Note 1
	5925 - 6425 UNII-5	11be EHT20 52+26T RU70 (CDD)	MCS0	RSE	Fundamental	1	17.847412	44.00	42.89	-1.11	-10.00	Note 1
	5925 - 6425 UNII-5	11be EHT160 SU (Ant 16)	MCS11	Radiated Bandedge (dBm)	Horizontal Low Bandedge	15	5.919268	-29.62	-30.59	-0.97	-2.62	Note 1
	6425-6875 UNII-7	11be EHT160 SU (Ant 16)	MCS0	Avg Power (dBm)	Fundamental VLP	175	6.825	12.95	12.93	-0.02	-1.05	Note 1
	6875-7125 UNII-8	11be EHT160 SU (Ant 6)	MCS11	Radiated Bandedge (dBm)	Vertical Low Bandedge	207	7.131056	-29.53	-30.60	-1.07	-2.53	Note 1

Note 1: Deviation from reference to variant within the value allowed by equation (4) in KDB 484596. Additional tests not required.

Note 2: Deviation from reference to variant exceeds the value allowed by equation (4) in KDB 484596. Additional tests performed on second channel.

3.4. SPOT CHECK VERIFICATION RESULTS SUMMARY FOR A3715

A3714 SPOT CHECK RESULTS												
Equipment Class / Technology	Frequency (GHz)	Mode	Data Rate	Test Item		Channel	Measured Frequency (GHz)	Sub Model: A3713	Sub Model: A3715	Delta (dB)	Margin	Remarks
								FCC ID : BCG-E9192A IC : 579C-E9192A	FCC ID : BCG-E9194A IC : 579C-E9194A			
6CD / 6VL UNII-5 / 6 / 7 / 8	5925 - 6425 UNII-5	11be EHT160 SU (SDM)	MCS0	Avg Power (dBm)	Fundamental LP	47	6.185	17.96	17.95	-0.01	-6.04	Note 1
	5925 - 6425 UNII-5	11be EHT40 SU (CDD)	MCS0	Avg Power (dBm)	Fundamental SP	3	5.965	20.45	20.42	-0.03	-9.55	Note 1
	5925 - 6425 UNII-5	11be EHT20 52+26T RU70 (CDD)	MCS0	RSE	Fundamental	1	*17.847412	44.00	44.09	0.09	-10.00	Note 1
	5925 - 6425 UNII-5	11be EHT160 SU (Ant 16)	MCS11	Radiated Bandedge (dBm)	Horizontal Low Bandedge	15	5.919268	-29.62	-29.73	-0.11	-2.62	Note 1
	6425-6875 UNII-7	11be EHT160 SU (Ant 16)	MCS0	Avg Power (dBm)	Fundamental VLP	175	6.825	12.95	12.93	-0.02	-1.05	Note 1
	6875-7125 UNII-8	11be EHT160 SU (Ant 6)	MCS11	Radiated Bandedge (dBm)	Vertical Low Bandedge	207	7.131056	-29.53	-32.50	-2.97	-2.53	Note 1

Note 1: Deviation from reference to variant within the value allowed by equation (4) in KDB 484596. Additional tests not required.

Note 2: Deviation from reference to variant exceeds the value allowed by equation (4) in KDB 484596. Additional tests performed on second channel.

END OF TEST REPORT