

RADIATED TEST REPORT

Report Number: 15982168-E10&11V2

Applicant : APPLE INC.
1 APPLE PARK WAY
CUPERTINO, CA 95014, U.S.A.

Model : A3716 (Parent)
A3717, A3718 (Variants)

Brand : APPLE

FCC ID : BCG-E9195A (Parent)
BCG-E9196A, BCG-E9197A (Variant)

IC : 579C-E9195A (Parent)
579C-E9196A, 579C-E9197A (Variant)

EUT Description : SMARTPHONE

Test Standard(s) : FCC 47 CFR PART 15 SUBPART E
ISED RSS-247 ISSUE 4
ISED RSS-GEN ISSUE 5 + A1 + A2

Date Of Issue:
2026-08-03

Prepared by:
UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538 U.S.A.
TEL: (510) 319-4000
FAX: (510) 661-0888



REPORT REVISION HISTORY

Rev.	Issue Date	Revisions	Revised By
V1	2026-07-22	Initial Review	Everardo Torres
V2	2026-08-03	Addressed TCB feedback sections 1 and 2	Jonathan Aspiras

TABLE OF CONTENTS

1. RADIATED TEST RESULTS	4
1.1. TRANSMITTER ABOVE 1 GHz	6
1.1.1. 802.11n/ac SISO MODE IN UNII-1 BAND – BANDEDGE	6
1.1.2. 802.11n/ac MIMO MODE IN UNII-1 BAND – BANDEDGE	8
1.1.3. 802.11be SISO SU MODE IN UNII-1 BAND – BANDEDGE	9
1.1.4. 802.11be SISO PARTIAL RU MODE IN UNII-1 BAND – BANDEDGE	11
1.1.5. 802.11be MIMO SU MODE IN UNII-1 BAND – BANDEDGE	12
1.1.6. 802.11be MIMO PARTIAL RU MODE IN UNII-1 BAND – BANDEDGE	13
1.1.7. 802.11n/ac MIMO MODE IN UNII-1 BAND – SPURIOUS EMISSIONS	15
1.1.8. 802.11be MIMO SU MODE IN UNII-1 BAND – SPURIOUS EMISSIONS	18
1.1.9. 802.11be MIMO PARTIAL RU MODE IN UNII-1 BAND – SPURIOUS EMISSIONS	20
1.1.10. 802.11n/ac SISO MODE IN UNII-2A BAND – BANDEDGE	23
1.1.11. 802.11n/ac MIMO MODE IN UNII-2A BAND - BANDEDGE	25
1.1.12. 802.11be SISO SU MODE IN UNII-2A BAND – BANDEDGE	26
1.1.13. 802.11be SISO PARTIAL RU MODE IN UNII-2A BAND – BANDEDGE	28
1.1.14. 802.11be MIMO SU MODE IN UNII-2A BAND – BANDEDGE	29
1.1.15. 802.11be MIMO PARTIAL RU MODE IN UNII-2A BAND – BANDEDGE	30
1.1.16. 802.11n/ac MIMO MODE IN UNII-2A BAND – SPURIOUS EMISSIONS	32
1.1.17. 802.11be MIMO SU MODE IN UNII-2A BAND – SPURIOUS EMISSIONS	34
1.1.18. 802.11be MIMO PARTIAL RU MODE IN UNII-2A BAND – SPURIOUS EMISSIONS	36
1.1.19. 802.11n/ac SISO MODE IN UNII-2C BAND – BANDEDGE	39
1.1.20. 802.11n/ac MIMO MODE IN UNII-2C BAND – BANDEDGE	43
1.1.21. 802.11be SISO SU MODE IN UNII-2C BAND – BANDEDGE	45
1.1.22. 802.11be SISO PARTIAL RU MODE IN UNII-2C BAND - BANDEDGE	49
1.1.23. 802.11be MIMO SU MODE IN UNII-2C BAND – BANDEDGE	52
1.1.24. 802.11be MIMO PARTIAL RU MODE IN UNII-2C BAND – BANDEDGE	54
1.1.25. 802.11n/ac MIMO MODE IN UNII-2C BAND – SPURIOUS EMISSIONS	58
1.1.26. 802.11be SU MIMO MODE IN UNII-2C BAND – SPURIOUS EMISSIONS	61
1.1.27. 802.11be MIMO PARTIAL RU MODE IN UNII-2C BAND – SPURIOUS EMISSIONS	64
1.1.28. 802.11n/ac SISO MODE IN UNII-3 BAND BANDEDGE	68
1.1.29. 802.11n/ac MIMO MODE IN UNII-3 BAND - BANDEDGE	69
1.1.30. 802.11be SISO SU MODE IN UNII-3 BAND - BANDEDGE	70
1.1.31. 802.11be SISO PARTIAL RU MODE IN UNII-3 BAND – BANDEDGE	71
1.1.32. 802.11be MIMO SU MODE IN UNII-3 BAND - BANDEDGE	72
1.1.33. 802.11be MIMO PARTIAL RU MODE IN UNII-3 BAND - BANDEDGE	73
1.1.34. 802.11n/ac MIMO MODE IN UNII-3 BAND – SPURIOUS EMISSIONS	76
1.1.35. 802.11be MIMO SU MODE IN UNII-3 BAND – SPURIOUS EMISSIONS	78
1.1.36. 802.11be MIMO PARTIAL RU MODE IN UNII-3 BAND – SPURIOUS EMISSIONS	80
1.2. WORST CASE BELOW 1 GHz	83
1.3. WORST CASE 18-26 GHz	86
1.4. WORST CASE 26-40 GHz	88
2. AC POWERLINE CONDUCTED EMISSIONS	91
3. SETUP PHOTOS	96

1. RADIATED TEST RESULTS

LIMITS

FCC §15.205 and §15.209 -Restricted bands
FCC §15.407(b) (1-3) -Un-Restricted bands

RSS 247 Issue 4 Sections

7.3.1.3 (for 5150-5250 MHz band)
7.3.2.3 (for 5250-5350 MHz band)
7.3.3.3 (for 5470-5725 MHz band)
7.3.4.4 (for 5725-5850 MHz band)

General field strength limits at frequencies above 30 MHz;

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz and 1.5 meters above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements in the 30-1000MHz range, 9kHz for peak and/or quasi-peak detection measurements in the 0.15-30MHz range, and 200Hz for peak and/or quasi-peak detection measurements in the 9 to 150kHz range. Peak detection is used unless otherwise noted as quasi-peak or average (9-90kHz and 110-490kHz).

For pre-scans from 1 - 18 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 30 kHz for peak measurements.

For final measurements above 1 GHz, the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements and as applicable for average measurements.

The spectrum from 30 MHz to 1GHz and 18GHz to 40 GHz is investigated with the transmitter set to transmit at the channel with the highest output power as a worst-case scenario. 1GHz to 18GHz was set to the lowest, middle, and highest channels in the 5 GHz bands.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

Note: The limits in CFR 47, Part 15, Subpart C, paragraph 15.209(a), are identical to those in RSS-Gen section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as report in the table) using free space impedance of 377 Ohms. For example, the measurement at frequency X kHz resulted in a level of Y dBuV/m, which is equivalent to $Y-51.5 = Z$ dBuA/m, which has the same margin, W dB to the corresponding RSS-Gen Table 6 limit as it has to 15.209(a) limit.

In addition:

KDB 414788 Open Field Site (OFS) and Chamber Correlation Justification

Based on FCC 15.31 (f) (2), measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed, and the chamber-measured test result is the worst-case test result.

RESULTS

The plots in these sections are for reference settings only for different bandwidths and different antennas.

1.1. TRANSMITTER ABOVE 1 GHz

1.1.1. 802.11n/ac SISO MODE IN UNII-1 BAND – BANDEDGE

20MHz

UNII-1 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filt/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
HT20	5180	6	* 5.150000	60.62	Pk	34.40	0.00	-33.70	61.32	-	-	74	-12.68	279	131	H
			* 5.148175	63.21	Pk	34.40	0.00	-33.70	63.91	-	-	74	-10.09	279	131	H
			* 5.150000	47.30	RMS	34.40	0.00	-33.70	48.00	54	-6.00	-	-	279	131	H
			* 5.149888	47.45	RMS	34.40	0.00	-33.70	48.15	54	-5.85	-	-	279	131	H
			* 5.150000	63.58	Pk	34.40	0.00	-33.70	64.28	-	-	74	-9.72	234	161	V
			* 5.149269	67.04	Pk	34.40	0.00	-33.70	67.74	-	-	74	-6.26	234	161	V
			* 5.150000	49.56	RMS	34.40	0.00	-33.70	50.26	54	-3.74	-	-	234	161	V
			* 5.149925	49.97	RMS	34.40	0.00	-33.70	50.67	54	-3.33	-	-	234	161	V
		16	* 5.150000	65.49	Pk	34.30	0.00	-32.62	67.17	-	-	74	-6.83	247	203	H
			* 5.149668	67.54	Pk	34.30	0.00	-32.62	69.22	-	-	74	-4.78	247	203	H
			* 5.150000	49.03	RMS	34.30	0.00	-32.62	50.71	54	-3.29	-	-	247	203	H
			* 5.149585	49.58	RMS	34.30	0.00	-32.62	51.26	54	-2.74	-	-	247	203	H
			* 5.150000	56.74	Pk	34.30	0.00	-32.62	58.42	-	-	74	-15.58	82	204	V
			* 5.149918	57.42	Pk	34.30	0.00	-32.62	59.10	-	-	74	-14.90	82	204	V
			* 5.150000	44.46	RMS	34.30	0.00	-32.62	46.14	54	-7.86	-	-	82	204	V
			* 5.007306	45.79	RMS	34.40	0.00	-32.65	47.54	54	-6.46	-	-	82	204	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

40MHz

UNII-1 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filt/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
HT40	5190	6	* 5.150000	63.75	Pk	34.10	0.00	-30.80	67.05	-	-	74	-6.95	14	281	H
			* 5.149800	65.07	Pk	34.10	0.00	-30.80	68.37	-	-	74	-5.63	14	281	H
			* 5.150000	46.46	RMS	34.10	0.00	-30.80	49.76	54	-4.24	-	-	14	281	H
			* 5.148519	47.82	RMS	34.10	0.00	-30.90	51.02	54	-2.98	-	-	14	281	H
			* 5.150000	61.06	Pk	34.10	0.00	-30.80	64.36	-	-	74	-9.64	23	262	V
			* 5.149988	62.27	Pk	34.10	0.00	-30.80	65.57	-	-	74	-8.43	23	262	V
			* 5.150000	44.31	RMS	34.10	0.00	-30.80	47.61	54	-6.39	-	-	23	262	V
			* 5.148707	45.51	RMS	34.10	0.00	-30.90	48.71	54	-5.29	-	-	23	262	V
		16	* 5.150000	67.84	Pk	34.30	0.00	-35.53	66.61	-	-	74	-7.39	344	101	H
			* 5.149890	70.02	Pk	34.30	0.00	-35.53	68.79	-	-	74	-5.21	344	101	H
			* 5.150000	49.78	RMS	34.30	0.00	-35.53	48.55	54	-5.45	-	-	344	101	H
			* 5.149446	50.02	RMS	34.30	0.00	-35.52	48.80	54	-5.20	-	-	344	101	H
			* 5.150000	56.41	Pk	34.30	0.00	-35.53	55.18	-	-	74	-18.82	15	113	V
			* 5.106473	57.83	Pk	34.30	0.00	-35.62	56.51	-	-	74	-17.49	15	113	V
			* 5.150000	44.92	RMS	34.30	0.00	-35.53	43.69	54	-10.31	-	-	15	113	V
			* 5.003028	46.50	RMS	34.20	0.00	-35.64	45.06	54	-8.94	-	-	15	113	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

80MHz

UNII-1 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
VHT80	5210	6	* 5.150000	46.93	Pk	34.10	0.00	-17.60	63.43	-	-	74	-10.57	327	161	H
			* 5.148550	48.62	Pk	34.10	0.00	-17.50	65.22	-	-	74	-8.78	327	161	H
			* 5.150000	33.26	RMS	34.10	0.00	-17.60	49.76	54	-4.24	-	-	327	161	H
			* 5.149832	34.48	RMS	34.10	0.00	-17.60	50.98	54	-3.02	-	-	327	161	H
			* 5.150000	38.40	Pk	34.10	0.00	-17.60	54.90	-	-	74	-19.10	141	141	V
			* 5.003157	41.55	Pk	34.00	0.00	-17.30	58.25	-	-	74	-15.75	141	141	V
		16	* 5.150000	27.66	RMS	34.10	0.00	-17.60	44.16	54	-9.84	-	-	141	141	V
			* 5.007032	29.30	RMS	34.00	0.00	-17.30	46.00	54	-8.00	-	-	141	141	V
			* 5.150000	68.44	Pk	34.50	0.00	-34.60	68.34	-	-	74	-5.66	253	111	H
			* 5.147019	69.55	Pk	34.40	0.00	-34.60	69.35	-	-	74	-4.65	253	111	H
			* 5.150000	51.08	RMS	34.50	0.00	-34.60	50.98	54	-3.02	-	-	253	111	H
			* 5.149769	51.31	RMS	34.50	0.00	-34.60	51.31	54	-2.69	-	-	253	111	H
			* 5.150000	58.46	Pk	34.50	0.00	-34.60	58.36	-	-	74	-15.64	188	149	V
			* 5.148925	59.36	Pk	34.50	0.00	-34.50	59.36	-	-	74	-14.64	188	149	V
			* 5.150000	42.58	RMS	34.50	0.00	-34.60	42.48	54	-11.52	-	-	188	149	V
			* 5.149957	42.87	RMS	34.50	0.00	-34.50	42.87	54	-11.13	-	-	188	149	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

160MHz

UNII-1 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
VHT160	5250 (Straddle)	6	* 5.150000	55.77	Pk	34.10	0.00	-30.80	59.07	-	-	74	-14.93	192	113	H
			* 5.120547	62.94	Pk	34.00	0.00	-30.90	66.04	-	-	74	-7.96	192	113	H
			* 5.150000	41.49	RMS	34.10	0.10	-30.80	44.89	54	-9.11	-	-	192	113	H
			* 5.121422	43.88	RMS	34.00	0.10	-30.90	47.08	54	-6.92	-	-	192	113	H
			* 5.150000	58.63	Pk	34.10	0.00	-30.80	61.93	-	-	74	-12.07	182	119	V
			* 5.122766	66.10	Pk	34.00	0.00	-30.90	69.20	-	-	74	-4.80	182	119	V
		16	* 5.150000	42.77	RMS	34.10	0.10	-30.80	46.17	54	-7.83	-	-	182	119	V
			* 5.122609	45.51	RMS	34.00	0.10	-30.90	48.71	54	-5.29	-	-	182	119	V
			* 5.150000	60.23	Pk	34.50	0.00	-34.60	60.13	-	-	74	-13.87	256	184	H
			* 5.121828	69.23	Pk	34.40	0.00	-34.60	69.03	-	-	74	-4.97	256	184	H
			* 5.150000	44.07	RMS	34.50	0.10	-34.60	44.07	54	-9.93	-	-	256	184	H
			* 5.123703	47.83	RMS	34.40	0.10	-34.60	47.73	54	-6.27	-	-	256	184	H
			* 5.150000	52.21	Pk	34.50	0.00	-34.60	52.11	-	-	74	-21.89	185	148	V
			* 5.123172	58.78	Pk	34.40	0.00	-34.60	58.58	-	-	74	-15.42	185	148	V
			* 5.150000	40.52	RMS	34.50	0.10	-34.60	40.52	54	-13.48	-	-	185	148	V
			* 5.112108	41.70	RMS	34.40	0.10	-34.70	41.50	54	-12.5	-	-	185	148	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.2. 802.11n/ac MIMO MODE IN UNII-1 BAND – BANDEDGE

UNII-1 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
HT20	5180	6+16	* 5.150000	65.95	Pk	34.40	0.00	-38.60	61.75	-	-	74	-12.25	52	125	H
			* 5.149890	66.49	Pk	34.40	0.00	-38.60	62.29	-	-	74	-11.71	52	125	H
			* 5.150000	50.16	RMS	34.40	0.00	-38.60	45.96	54	-8.04	-	-	52	125	H
			* 5.149890	50.87	RMS	34.40	0.00	-38.60	46.67	54	-7.33	-	-	52	125	H
			* 5.150000	65.23	Pk	34.40	0.00	-38.60	61.03	-	-	74	-12.97	184	104	V
			* 5.147751	73.16	Pk	34.40	0.00	-38.62	68.94	-	-	74	-5.06	184	104	V
			* 5.150000	51.71	RMS	34.40	0.00	-38.60	47.51	54	-6.49	-	-	184	104	V
			* 5.148168	54.40	RMS	34.40	0.00	-38.60	50.20	54	-3.80	-	-	184	104	V
HT40	5190	6+16	* 5.150000	57.45	Pk	34.40	0.00	-34.40	57.45	-	-	74	-16.55	61	115	H
			* 5.147175	60.91	Pk	34.40	0.00	-34.40	60.91	-	-	74	-13.09	61	115	H
			* 5.150000	43.43	RMS	34.40	0.00	-34.40	43.43	54	-10.57	-	-	61	115	H
			* 5.147831	44.95	RMS	34.40	0.00	-34.40	44.95	54	-9.05	-	-	61	115	H
			* 5.150000	62.82	Pk	34.40	0.00	-34.40	62.82	-	-	74	-11.178	49	103	V
			* 5.148363	69.13	Pk	34.40	0.00	-34.40	69.13	-	-	74	-4.87	49	103	V
			* 5.150000	45.70	RMS	34.40	0.00	-34.40	45.70	54	-8.3	-	-	49	103	V
			* 5.147644	51.14	RMS	34.40	0.00	-34.40	51.14	54	-2.86	-	-	49	103	V
VHT80	5210	6+16	* 5.150000	47.98	Pk	34.10	0.00	-17.60	64.48	-	-	74	-9.52	328	162	H
			* 5.147894	50.83	Pk	34.10	0.00	-17.50	67.43	-	-	74	-6.57	328	162	H
			* 5.150000	29.70	RMS	34.10	0.00	-17.60	46.20	54	-7.80	-	-	328	162	H
			* 5.147613	34.03	RMS	34.10	0.00	-17.50	50.63	54	-3.37	-	-	328	162	H
			* 5.150000	38.72	Pk	34.10	0.00	-17.60	55.22	-	-	74	-18.78	61	139	V
			* 5.148957	42.24	Pk	34.10	0.00	-17.50	58.84	-	-	74	-15.16	61	139	V
			* 5.150000	27.11	RMS	34.10	0.00	-17.60	43.61	54	-10.39	-	-	61	139	V
			* 5.009251	29.13	RMS	34.00	0.00	-17.20	45.93	54	-8.07	-	-	61	139	V
VHT160	5250 (Straddle)	6+16	* 5.150000	58.86	Pk	34.50	0.00	-34.60	58.76	-	-	74	-15.24	227	251	H
			* 5.123328	69.61	Pk	34.40	0.00	-34.60	69.41	-	-	74	-4.59	227	251	H
			* 5.150000	42.32	RMS	34.50	0.10	-34.60	42.32	54	-11.68	-	-	227	251	H
			* 5.118734	48.89	RMS	34.40	0.10	-34.60	48.79	54	-5.21	-	-	227	251	H
			* 5.150000	57.88	Pk	34.50	0.00	-34.60	57.78	-	-	74	-16.22	132	153	V
			* 5.119672	64.40	Pk	34.40	0.00	-34.60	64.20	-	-	74	-9.80	132	153	V
			* 5.150000	41.81	RMS	34.50	0.10	-34.60	41.81	54	-12.19	-	-	132	153	V
			* 5.119328	43.96	RMS	34.40	0.10	-34.60	43.86	54	-10.14	-	-	132	153	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.3. 802.11be SISO SU MODE IN UNII-1 BAND – BANDEDGE**20MHz**

UNII-1 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 SU Mode	5180	6	* 5.150000	62.97	Pk	34.30	0.00	-32.62	64.65	-	-	74	-9.35	196	285	H
			* 5.149112	67.82	Pk	34.30	0.00	-32.62	69.50	-	-	74	-4.50	196	285	H
			* 5.150000	49.47	RMS	34.30	0.00	-32.62	51.15	54	-2.85	-	-	196	285	H
			* 5.149862	49.63	RMS	34.30	0.00	-32.62	51.31	54	-2.69	-	-	196	285	H
			* 5.150000	60.33	Pk	34.30	0.00	-32.62	62.01	-	-	74	-11.99	207	209	V
			* 5.148640	62.77	Pk	34.30	0.00	-32.63	64.44	-	-	74	-9.56	207	209	V
		16	* 5.150000	46.33	RMS	34.30	0.00	-32.62	48.01	54	-5.99	-	-	207	209	V
			* 5.148946	47.44	RMS	34.30	0.00	-32.62	49.12	54	-4.88	-	-	207	209	V
			* 5.150000	54.55	Pk	34.50	0.00	-23.50	65.55	-	-	74	-8.45	6	229	H
			* 5.149307	55.49	Pk	34.50	0.00	-23.60	66.39	-	-	74	-7.61	6	229	H
			* 5.150000	39.70	RMS	34.50	0.00	-23.50	50.70	54	-3.30	-	-	6	229	H
			* 5.149779	39.60	RMS	34.50	0.00	-23.50	50.60	54	-3.40	-	-	6	229	H
			* 5.150000	46.38	Pk	34.50	0.00	-23.50	57.38	-	-	74	-16.62	319	392	V
			* 5.149168	49.24	Pk	34.50	0.00	-23.60	60.14	-	-	74	-13.86	319	392	V
			* 5.150000	32.31	RMS	34.50	0.00	-23.50	43.31	54	-10.69	-	-	319	392	V
			* 5.149223	33.43	RMS	34.50	0.00	-23.60	44.33	54	-9.67	-	-	319	392	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

40MHz

UNII-1 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT40 SU Mode	5190	6	* 5.150000	71.16	Pk	34.40	0.00	-37.80	67.76	-	-	74	-6.24	17	268	H
			* 5.148946	72.59	Pk	34.40	0.00	-37.80	69.19	-	-	74	-4.81	17	268	H
			* 5.150000	52.67	RMS	34.40	0.00	-37.80	49.27	54	-4.73	-	-	17	268	H
			* 5.149807	54.41	RMS	34.40	0.00	-37.80	51.01	54	-2.99	-	-	17	268	H
			* 5.150000	66.47	Pk	34.40	0.00	-37.80	63.07	-	-	74	-10.93	290	135	V
			* 5.148223	67.95	Pk	34.40	0.00	-37.80	64.55	-	-	74	-9.45	290	135	V
		16	* 5.150000	50.27	RMS	34.40	0.00	-37.80	46.87	54	-7.13	-	-	290	135	V
			* 5.149835	50.47	RMS	34.40	0.00	-37.80	47.07	54	-6.93	-	-	290	135	V
			* 5.150000	65.54	Pk	34.20	0.00	-32.70	67.04	-	-	74	-6.96	146	102	H
			* 5.149585	67.11	Pk	34.20	0.00	-32.70	68.61	-	-	74	-5.39	146	102	H
			* 5.150000	48.27	RMS	34.20	0.00	-32.70	49.77	54	-4.23	-	-	146	102	H
			* 5.149723	49.35	RMS	34.20	0.00	-32.70	50.85	54	-3.15	-	-	146	102	H
			* 5.150000	53.69	Pk	34.20	0.00	-32.70	55.19	-	-	74	-18.81	148	165	V
			* 5.008389	57.39	Pk	34.00	0.00	-32.67	58.72	-	-	74	-15.28	148	165	V
			* 5.150000	43.46	RMS	34.20	0.00	-32.70	44.96	54	-9.04	-	-	148	165	V
			* 5.002944	45.48	RMS	34.00	0.00	-32.67	46.81	54	-7.19	-	-	148	165	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

80MHz

UNII-1 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT80 SU Mode	5210	6	* 5.150000	46.98	Pk	34.10	0.00	-17.60	63.48	-	-	74	-10.52	326	166	H
			* 5.149550	48.58	Pk	34.10	0.00	-17.50	65.18	-	-	74	-8.82	326	166	H
			* 5.150000	33.03	RMS	34.10	0.00	-17.60	49.53	54	-4.47	-	-	326	166	H
			* 5.149769	34.14	RMS	34.10	0.00	-17.60	50.64	54	-3.36	-	-	326	166	H
			* 5.150000	42.16	Pk	34.10	0.00	-17.60	58.66	-	-	74	-15.34	3	301	V
			* 5.148738	43.88	Pk	34.10	0.00	-17.50	60.48	-	-	74	-13.52	3	301	V
		16	* 5.150000	29.90	RMS	34.10	0.00	-17.60	46.40	54	-7.60	-	-	3	301	V
			* 5.149769	30.57	RMS	34.10	0.00	-17.60	47.07	54	-6.93	-	-	3	301	V
			* 5.150000	64.80	Pk	34.20	0.00	-32.70	66.30	-	-	74	-7.70	128	101	H
			* 5.149890	67.43	Pk	34.20	0.00	-32.70	68.93	-	-	74	-5.07	128	101	H
			* 5.150000	48.57	RMS	34.20	0.00	-32.70	50.07	54	-3.93	-	-	128	101	H
			* 5.147918	49.20	RMS	34.20	0.00	-32.67	50.73	54	-3.27	-	-	128	101	H
			* 5.150000	55.91	Pk	34.20	0.00	-32.70	57.41	-	-	74	-16.59	57	178	V
			* 5.145973	60.15	Pk	34.10	0.00	-32.69	61.56	-	-	74	-12.44	57	178	V
			* 5.150000	44.19	RMS	34.20	0.00	-32.70	45.69	54	-8.31	-	-	57	178	V
			* 5.000611	46.06	RMS	34.00	0.00	-32.69	47.37	54	-6.63	-	-	57	178	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

160MHz

UNII-1 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT160 SU Mode	5250 (Straddle)	6	* 5.150000	67.90	Pk	34.30	0.00	-39.90	62.30	-	-	74	-11.70	17	204	H
			* 5.118223	74.60	Pk	34.30	0.00	-40.00	68.90	-	-	74	-5.10	17	204	H
			* 5.150000	52.50	RMS	34.30	0.14	-39.90	47.04	54	-6.96	-	-	17	204	H
			* 5.124945	56.50	RMS	34.30	0.14	-39.99	50.95	54	-3.05	-	-	17	204	H
			* 5.150000	61.79	Pk	34.30	0.00	-39.90	56.19	-	-	74	-17.81	297	106	V
			* 5.118612	69.76	Pk	34.30	0.00	-40.00	64.06	-	-	74	-9.94	297	106	V
		16	* 5.150000	49.47	RMS	34.30	0.14	-39.90	44.01	54	-9.99	-	-	297	106	V
			* 5.115001	51.91	RMS	34.30	0.14	-39.90	46.45	54	-7.55	-	-	297	106	V
			5.150000	63.93	Pk	34.40	0.00	-37.80	60.53	-	-	74	-13.47	329	137	H
			5.115418	73.22	Pk	34.40	0.00	-38.30	69.32	-	-	74	-4.68	329	137	H
			5.150000	49.47	RMS	34.40	0.14	-37.80	46.21	54	-7.79	-	-	329	137	H
			5.115806	54.90	RMS	34.40	0.14	-38.30	51.14	54	-2.86	-	-	329	137	H
			5.150000	57.59	Pk	34.40	0.00	-37.80	54.19	-	-	74	-19.81	245	186	V
			5.114751	65.47	Pk	34.40	0.00	-38.30	61.57	-	-	74	-12.43	245	186	V
			5.150000	45.91	RMS	34.40	0.14	-37.80	42.65	54	-11.35	-	-	245	186	V
			5.120001	48.24	RMS	34.40	0.14	-38.20	44.58	54	-9.42	-	-	245	186	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.4. 802.11be SISO PARTIAL RU MODE IN UNII-1 BAND – BANDEDGE

UNII-1 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filt/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 52T - RU37	5180	6	* 5.150000	53.16	Pk	34.10	0.00	-30.80	56.46	-	-	74	-17.54	356	275	H
			* 5.148894	57.70	Pk	34.10	0.00	-30.90	60.90	-	-	74	-13.10	356	275	H
			* 5.150000	40.58	RMS	34.10	0.00	-30.80	43.88	54	-10.12	-	-	356	275	H
			* 5.129048	41.64	RMS	34.00	0.00	-30.90	44.74	54	-9.26	-	-	356	275	H
			* 5.150000	50.24	Pk	34.10	0.00	-30.80	53.54	-	-	74	-20.46	300	102	V
			* 5.117859	52.68	Pk	34.00	0.00	-30.90	55.78	-	-	74	-18.22	300	102	V
		16	* 5.150000	39.98	RMS	34.10	0.00	-30.80	43.28	54	-10.72	-	-	300	102	V
			* 5.088480	40.86	RMS	34.00	0.00	-30.90	43.96	54	-10.04	-	-	300	102	V
			* 5.150000	44.57	Pk	34.50	0.00	-23.50	55.57	-	-	74	-18.43	6	229	H
			* 5.148585	49.86	Pk	34.50	0.00	-23.60	60.76	-	-	74	-13.24	6	229	H
			* 5.150000	28.87	RMS	34.50	0.00	-23.50	39.87	54	-14.13	-	-	6	229	H
			* 5.147835	30.41	RMS	34.50	0.00	-23.50	41.41	54	-12.59	-	-	6	229	H
			* 5.150000	39.47	Pk	34.50	0.00	-23.50	50.47	-	-	74	-23.53	319	392	V
			* 5.147862	43.15	Pk	34.50	0.00	-23.50	54.15	-	-	74	-19.85	319	392	V
			* 5.150000	28.34	RMS	34.50	0.00	-23.50	39.34	54	-14.66	-	-	319	392	V
			* 5.004861	30.17	RMS	34.30	0.00	-23.50	40.97	54	-13.03	-	-	319	392	V
EHT80 484+484T - RU93	5210	6	* 5.150000	72.31	Pk	34.50	0.00	-37.62	69.19	-	-	74	-4.81	226	196	H
			* 5.149835	72.27	Pk	34.50	0.00	-37.62	69.15	-	-	74	-4.85	226	196	H
			* 5.150000	50.08	RMS	34.50	0.00	-37.62	46.96	54	-7.04	-	-	226	196	H
			* 5.143612	52.40	RMS	34.50	0.00	-37.58	49.32	54	-4.68	-	-	226	196	H
			* 5.150000	66.23	Pk	34.50	0.00	-37.62	63.11	-	-	74	-10.89	157	198	V
			* 5.147112	68.12	Pk	34.50	0.00	-37.56	65.06	-	-	74	-8.94	157	198	V
		16	* 5.150000	48.14	RMS	34.50	0.00	-37.62	45.02	54	-8.98	-	-	157	198	V
			* 5.149862	49.71	RMS	34.50	0.00	-37.62	46.59	54	-7.41	-	-	157	198	V
			* 5.150000	66.71	Pk	34.30	0.00	-32.62	68.39	-	-	74	-5.61	19	103	H
			* 5.149807	67.35	Pk	34.30	0.00	-32.62	69.03	-	-	74	-4.97	19	103	H
			* 5.150000	45.68	RMS	34.30	0.00	-32.62	47.36	54	-6.64	-	-	19	103	H
			* 5.149723	48.44	RMS	34.30	0.00	-32.62	50.12	54	-3.88	-	-	19	103	H
			* 5.150000	57.44	Pk	34.30	0.00	-32.62	59.12	-	-	74	-14.88	136	325	V
			* 5.144001	59.33	Pk	34.30	0.00	-32.65	60.98	-	-	74	-13.02	136	325	V
			* 5.150000	44.20	RMS	34.30	0.00	-32.62	45.88	54	-8.12	-	-	136	325	V
			* 5.005583	46.13	RMS	34.40	0.00	-32.65	47.88	54	-6.12	-	-	136	325	V
EHT160 996+484T - S95	5250 (Straddle)	6	* 5.150000	70.81	Pk	34.30	0.00	-39.90	65.21	-	-	74	-8.79	17	204	H
			* 5.148612	74.39	Pk	34.30	0.00	-39.86	68.83	-	-	74	-5.17	17	204	H
			* 5.150000	54.96	RMS	34.30	0.00	-39.90	49.36	54	-4.64	-	-	17	204	H
			* 5.144751	56.41	RMS	34.30	0.00	-39.92	50.79	54	-3.21	-	-	17	204	H
			* 5.150000	64.10	Pk	34.30	0.00	-39.90	58.50	-	-	74	-15.50	297	106	V
			* 5.149196	68.88	Pk	34.30	0.00	-39.90	63.28	-	-	74	-10.72	297	106	V
		16	* 5.150000	50.76	RMS	34.30	0.00	-39.90	45.16	54	-8.84	-	-	297	106	V
			* 5.147446	51.95	RMS	34.30	0.00	-39.86	46.39	54	-7.61	-	-	297	106	V
			* 5.150000	68.22	Pk	34.40	0.00	-37.80	64.82	-	-	74	-9.18	329	137	H
			* 5.097056	72.61	Pk	34.40	0.00	-38.10	68.91	-	-	74	-5.09	329	137	H
			* 5.150000	51.40	RMS	34.40	0.00	-37.80	48.00	54	-6.00	-	-	329	137	H
			* 5.148696	53.12	RMS	34.40	0.00	-37.80	49.72	54	-4.28	-	-	329	137	H
			* 5.150000	59.94	Pk	34.40	0.00	-37.80	56.54	-	-	74	-17.46	245	185	V
			* 5.096167	64.09	Pk	34.40	0.00	-38.10	60.39	-	-	74	-13.61	245	185	V
			* 5.150000	46.70	RMS	34.40	0.00	-37.80	43.30	54	-10.70	-	-	245	185	V
			* 5.143807	48.18	RMS	34.40	0.00	-38.12	44.46	54	-9.54	-	-	245	185	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.5. 802.11be MIMO SU MODE IN UNII-1 BAND – BANDEDGE

UNII-1 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filt/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 SU Mode	5180	6+16	* 5.150000	70.45	Pk	34.00	0.00	-38.10	66.35	-	-	74	-7.65	236	252	H
			* 5.149251	72.50	Pk	34.00	0.00	-38.10	68.40	-	-	74	-5.60	236	252	H
			* 5.150000	53.87	RMS	34.00	0.00	-38.10	49.77	54	-4.23	-	-	236	252	H
			* 5.149779	54.90	RMS	34.00	0.00	-38.10	50.80	54	-3.20	-	-	236	252	H
			* 5.150000	62.17	Pk	34.00	0.00	-38.10	58.07	-	-	74	-15.93	117	206	V
			* 5.149140	66.09	Pk	34.00	0.00	-38.10	61.99	-	-	74	-12.01	117	206	V
			* 5.150000	48.82	RMS	34.00	0.00	-38.10	44.72	54	-9.28	-	-	117	206	V
			* 5.149862	49.97	RMS	34.00	0.00	-38.10	45.87	54	-8.13	-	-	117	206	V
EHT40 SU Mode	5190	6+16	* 5.150000	69.02	Pk	34.40	0.00	-37.80	65.62	-	-	74	-8.38	323	236	H
			* 5.149835	72.11	Pk	34.40	0.00	-37.80	68.71	-	-	74	-5.29	323	236	H
			* 5.150000	51.37	RMS	34.40	0.00	-37.80	47.97	54	-6.03	-	-	323	236	H
			* 5.149946	51.96	RMS	34.40	0.00	-37.80	48.56	54	-5.44	-	-	323	236	H
			* 5.150000	59.33	Pk	34.40	0.00	-37.80	55.93	-	-	74	-18.07	255	183	V
			* 5.149890	61.72	Pk	34.40	0.00	-37.80	58.32	-	-	74	-15.68	255	183	V
			* 5.150000	47.03	RMS	34.40	0.00	-37.80	43.63	54	-10.37	-	-	255	183	V
			* 5.145446	47.77	RMS	34.40	0.00	-37.96	44.21	54	-9.79	-	-	255	183	V
EHT80 SU Mode	5210	6+16	* 5.150000	64.14	Pk	34.40	0.00	-36.02	62.52	-	-	74	-11.48	279	112	H
			* 5.145473	70.92	Pk	34.40	0.00	-36.04	69.28	-	-	74	-4.72	279	112	H
			* 5.150000	49.40	RMS	34.40	0.00	-36.02	47.78	54	-6.22	-	-	279	112	H
			* 5.145501	52.06	RMS	34.40	0.00	-36.04	50.42	54	-3.58	-	-	279	112	H
			* 5.150000	57.22	Pk	34.40	0.00	-36.02	55.60	-	-	74	-18.40	199	209	V
			* 5.145557	62.45	Pk	34.40	0.00	-36.04	60.81	-	-	74	-13.19	199	209	V
			* 5.150000	46.18	RMS	34.40	0.00	-36.02	44.56	54	-9.44	-	-	199	209	V
			* 5.145473	46.80	RMS	34.40	0.00	-36.04	45.16	54	-8.84	-	-	199	209	V
EHT160 SU Mode	5250 (Straddle)	6+16	* 5.150000	64.30	Pk	34.30	0.00	-39.90	58.70	-	-	74	-15.30	16	204	H
			* 5.118640	74.72	Pk	34.30	0.00	-40.00	69.02	-	-	74	-4.98	16	204	H
			* 5.150000	51.17	RMS	34.30	0.14	-39.90	45.71	54	-8.29	-	-	16	204	H
			* 5.148251	54.56	RMS	34.30	0.14	-39.83	49.17	54	-4.83	-	-	16	204	H
			* 5.150000	59.14	Pk	34.30	0.00	-39.90	53.54	-	-	74	-20.46	341	260	V
			* 5.117918	68.09	Pk	34.30	0.00	-40.00	62.39	-	-	74	-11.61	341	260	V
			* 5.150000	47.76	RMS	34.30	0.14	-39.90	42.30	54	-11.70	-	-	341	260	V
			* 5.117668	50.95	RMS	34.30	0.14	-40.00	45.39	54	-8.61	-	-	341	260	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

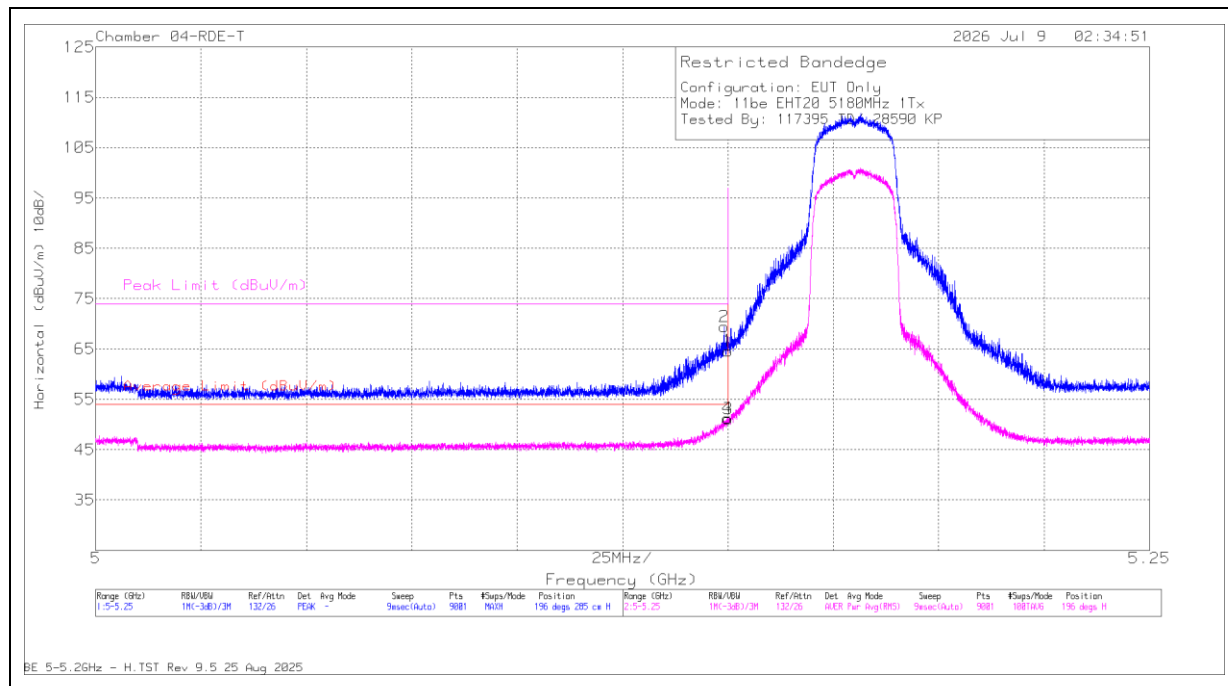
1.1.6. 802.11be MIMO PARTIAL RU MODE IN UNII-1 BAND – BANDEDGE

UNII-1 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cb/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 52T - RU37	5180	6+16	* 5.150000	58.21	Pk	34.40	0.00	-37.80	54.81	-	-	74	-19.19	236	252	H
			* 5.140362	60.07	Pk	34.40	0.00	-38.20	56.27	-	-	74	-17.73	236	252	H
			* 5.150000	46.26	RMS	34.40	0.00	-37.80	42.86	54	-11.14	-	-	236	252	H
			* 5.008639	47.90	RMS	34.30	0.00	-37.96	44.24	54	-9.76	-	-	236	252	H
			* 5.150000	57.17	Pk	34.40	0.00	-37.80	53.77	-	-	74	-20.23	117	206	V
			* 5.109362	59.90	Pk	34.40	0.00	-38.20	56.10	-	-	74	-17.90	117	206	V
			* 5.150000	46.93	RMS	34.40	0.00	-37.80	43.53	54	-10.47	-	-	117	206	V
			* 5.147751	47.43	RMS	34.40	0.00	-37.82	44.01	54	-9.99	-	-	117	206	V
EHT80 484+242T - RU90	5210	6+16	* 5.150000	69.58	Pk	34.40	0.00	-36.02	67.96	-	-	74	-6.04	14	259	H
			* 5.146223	69.24	Pk	34.40	0.00	-36.04	67.60	-	-	74	-6.4	14	259	H
			* 5.150000	51.45	RMS	34.40	0.00	-36.02	49.83	54	-4.17	-	-	14	259	H
			* 5.145751	52.61	RMS	34.40	0.00	-36.04	50.97	54	-3.03	-	-	14	259	H
			* 5.150000	63.37	Pk	34.40	0.00	-36.02	61.75	-	-	74	-12.25	201	156	V
			* 5.149890	63.43	Pk	34.40	0.00	-36.02	61.81	-	-	74	-12.19	201	156	V
			* 5.150000	47.05	RMS	34.40	0.00	-36.02	45.43	54	-8.57	-	-	201	156	V
			* 5.149696	47.85	RMS	34.40	0.00	-36.02	46.23	54	-7.77	-	-	201	156	V
EHT160 996+484T - S95	5250 (Straddle)	6+16	* 5.150000	65.77	Pk	34.30	0.00	-39.90	60.17	-	-	74	-13.83	16	204	H
			* 5.147196	74.97	Pk	34.30	0.00	-39.88	69.39	-	-	74	-4.61	16	204	H
			* 5.150000	53.67	RMS	34.30	0.00	-39.90	48.07	54	-5.93	-	-	16	204	H
			* 5.147529	56.60	RMS	34.30	0.00	-39.85	51.05	54	-2.95	-	-	16	204	H
			* 5.150000	59.21	Pk	34.30	0.00	-39.90	53.61	-	-	74	-20.39	340	260	V
			* 5.096473	67.29	Pk	34.30	0.00	-40.00	61.59	-	-	74	-12.41	340	260	V
			* 5.150000	48.44	RMS	34.30	0.00	-39.90	42.84	54	-11.16	-	-	340	260	V
			* 5.147585	50.20	RMS	34.30	0.00	-39.84	44.66	54	-9.34	-	-	340	260	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

WORST-CASE BANDEDGE (LOW CHANNEL)**802.11be EHT20 / 5180 MHz / 1TX SU****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fltr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.150000	62.97	Pk	34.30	0.00	-32.62	64.65	-	-	74	-9.35	196	285	H
2	* 5.149112	67.82	Pk	34.30	0.00	-32.62	69.50	-	-	74	-4.5	196	285	H
3	* 5.150000	49.47	RMS	34.30	0.00	-32.62	51.15	54	-2.85	-	-	196	285	H
4	* 5.149862	49.63	RMS	34.30	0.00	-32.62	51.31	54	-2.69	-	-	196	285	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.7. 802.11n/ac MIMO MODE IN UNII-1 BAND – SPURIOUS EMISSIONS**20MHz**

UNII-1 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cb/ Filtr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11n	5180	6 + 16	* 15.554130	55.24	PK-U	40.20	-43.06	0.00	52.38	-	-	74	-21.62	0	100	H
			* 15.544021	43.65	ADR	40.20	-43.18	0.00	40.67	54	-13.33	-	-	0	100	H
			* 15.541460	55.61	PK-U	40.20	-43.15	0.00	52.66	-	-	74	-21.34	0	200	V
			* 15.556971	43.64	ADR	40.20	-42.98	0.00	40.86	54	-13.14	-	-	0	200	V
			2.577351	42.70	PK-U	32.50	-26.26	0.00	48.94	-	-	68.2	-19.26	0	201	V
			2.586874	43.21	PK-U	32.50	-26.36	0.00	49.35	-	-	68.2	-18.85	0	100	H
			10.368774	56.89	PK-U	37.80	-45.56	0.00	49.13	-	-	68.2	-19.07	0	201	V
			10.376115	56.76	PK-U	37.70	-45.41	0.00	49.05	-	-	68.2	-19.15	0	100	H
	5200		* 15.610135	55.77	PK-U	40.20	-42.97	0.00	53.00	-	-	74	-21	0	100	H
			* 15.615189	44.12	ADR	40.20	-42.90	0.00	41.42	54	-12.58	-	-	0	100	H
			* 15.602959	56.08	PK-U	40.20	-43.10	0.00	53.18	-	-	74	-20.82	0	200	V
			* 15.615911	44.05	ADR	40.20	-42.86	0.00	41.39	54	-12.61	-	-	0	200	V
			2.611281	42.78	PK-U	32.50	-26.14	0.00	49.14	-	-	68.2	-19.06	0	100	H
			2.612651	42.77	PK-U	32.50	-26.16	0.00	49.11	-	-	68.2	-19.09	0	201	V
			10.391631	56.70	PK-U	37.70	-45.10	0.00	49.30	-	-	68.2	-18.9	0	201	V
			10.408879	57.02	PK-U	37.70	-45.08	0.00	49.64	-	-	68.2	-18.56	0	100	H
	5240		* 15.733774	56.96	PK-U	40.40	-43.07	0.00	54.29	-	-	74	-19.71	0	100	H
			* 15.735100	44.76	ADR	40.40	-43.04	0.00	42.12	54	-11.88	-	-	0	100	H
			* 15.705147	56.89	PK-U	40.30	-42.88	0.00	54.31	-	-	74	-19.69	0	200	V
			* 15.734925	44.82	ADR	40.40	-43.03	0.00	42.19	54	-11.81	-	-	0	200	V
			2.615497	43.30	PK-U	32.50	-26.16	0.00	49.64	-	-	68.2	-18.56	0	100	H
			2.637703	44.07	PK-U	32.40	-26.02	0.00	50.45	-	-	68.2	-17.75	0	201	V
			10.495736	56.98	PK-U	37.60	-45.54	0.00	49.04	-	-	68.2	-19.16	0	100	H
			10.496036	57.33	PK-U	37.60	-45.55	0.00	49.38	-	-	68.2	-18.82	0	201	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

40MHz

UNII-1 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11n	5190	6 + 16	* 11.934440	50.73	PK-U	39.60	-38.71	0.00	51.62	-	-	74	-22.38	360	198	H
			* 11.925493	39.11	ADR	39.50	-38.73	0.00	39.88	54	-14.12	-	-	360	198	H
			* 11.937763	50.80	PK-U	39.60	-38.67	0.00	51.73	-	-	74	-22.27	360	198	V
			* 11.954998	39.15	ADR	39.60	-38.58	0.00	40.17	54	-13.83	-	-	360	198	V
			1.734833	56.99	PK-U	29.00	-44.85	0.00	41.14	-	-	68.2	-27.06	2	198	V
			1.759328	56.42	PK-U	29.60	-44.79	0.00	41.23	-	-	68.2	-26.97	0	392	H
	5230		2.399874	57.02	PK-U	32.10	-43.63	0.00	45.49	-	-	68.2	-22.71	265	119	H
			2.400213	56.16	PK-U	32.10	-43.63	0.00	44.63	-	-	68.2	-23.57	287	271	V
			* 1.225140	58.09	PK-U	30.40	-44.96	0.00	43.53	-	-	74	-30.47	360	198	V
			* 1.225380	46.66	ADR	30.40	-44.96	0.00	32.10	54	-21.9	-	-	360	198	V
			* 1.226880	45.64	ADR	30.40	-44.96	0.00	31.08	54	-22.92	-	-	360	199	H
			* 1.227007	57.65	PK-U	30.40	-44.96	0.00	43.09	-	-	74	-30.91	360	199	H
			* 11.939013	51.13	PK-U	39.60	-38.64	0.00	52.09	-	-	74	-21.91	360	101	H
			* 11.953770	39.11	ADR	39.60	-38.57	0.00	40.14	54	-13.86	-	-	360	101	V
			* 11.960473	50.88	PK-U	39.60	-38.49	0.00	51.99	-	-	74	-22.01	360	101	V
			* 11.961173	39.11	ADR	39.60	-38.50	0.00	40.21	54	-13.79	-	-	360	101	H
			2.041564	55.24	PK-U	32.00	-43.98	0.00	43.26	-	-	68.2	-24.94	360	101	H
			2.045446	55.46	PK-U	32.00	-43.97	0.00	43.49	-	-	68.2	-24.71	360	198	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

80MHz

UNII-1 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11ac	5210	6 + 16	* 4.503317	46.53	ADR	34.40	-47.91	0.00	33.02	54	-20.98	-	-	0	100	H
			* 4.502363	46.66	ADR	34.40	-47.93	0.00	33.13	54	-20.87	-	-	0	201	V
			* 9.490979	45.69	ADR	36.80	-45.85	0.00	36.64	54	-17.36	-	-	0	100	H
			* 9.456433	57.67	PK-U	36.70	-45.95	0.00	48.42	-	-	74	-25.58	0	200	V
			* 9.427989	45.70	ADR	36.70	-46.00	0.00	36.40	54	-17.6	-	-	0	200	V
			4.477950	58.89	PK-U	34.40	-47.80	0.00	45.49	-	-	68.2	-22.71	0	100	H
			4.485010	58.39	PK-U	34.40	-47.81	0.00	44.98	-	-	68.2	-23.22	0	201	V
			7.051057	57.31	PK-U	35.60	-46.19	0.00	46.72	-	-	68.2	-21.48	0	201	V
			7.066419	56.98	PK-U	35.70	-46.20	0.00	46.48	-	-	68.2	-21.72	0	100	H
			9.505117	57.30	PK-U	36.80	-45.90	0.00	48.20	-	-	68.2	-20	0	100	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

160MHz

UNII-1 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11ac	5250 (Straddle)	6 + 16	2.630234	57.95	PK-U	32.60	-48.12	0.00	42.43	-	-	68.2	-25.77	360	201	V
			2.648207	58.42	PK-U	32.50	-48.02	0.00	42.90	-	-	68.2	-25.3	360	100	H
			10.488488	57.19	PK-U	37.60	-45.14	0.00	49.65	-	-	68.2	-18.55	360	201	V
			10.517138	56.66	PK-U	37.60	-44.73	0.00	49.53	-	-	68.2	-18.67	360	100	H
			* 15.731911	44.69	ADR	41.00	-43.18	0.00	42.51	54	-11.49	-	-	360	100	H
			* 15.737482	56.46	PK-U	41.00	-43.11	0.00	54.35	-	-	74	-19.65	360	200	V
			* 15.742329	55.85	PK-U	41.00	-43.19	0.00	53.66	-	-	74	-20.34	360	100	H
			* 15.744474	44.58	ADR	41.00	-43.26	0.00	42.32	54	-11.68	-	-	360	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.1.8. 802.11be MIMO SU MODE IN UNII-1 BAND – SPURIOUS EMISSIONS**20MHz**

UNII-1 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fltr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 SU Mode	5180	6+16	* 10.624099	47.97	PK-U	37.60	0.00	-36.80	48.77	-	-	74	-25.23	0	101	H
			* 10.631138	36.17	ADR	37.70	0.00	-36.80	37.07	54	-16.93	-	-	0	101	H
			* 15.523473	45.61	PK-U	40.00	0.00	-33.40	52.21	-	-	74	-21.79	0	200	H
			* 15.527534	34.05	ADR	40.00	0.00	-33.30	40.75	54	-13.25	-	-	0	200	H
			* 10.621522	48.02	PK-U	37.60	0.00	-36.80	48.82	-	-	74	-25.18	0	101	V
			* 10.616705	36.61	ADR	37.60	0.00	-36.90	37.31	54	-16.69	-	-	0	101	V
			* 15.557515	45.70	PK-U	40.10	0.00	-33.30	52.50	-	-	74	-21.5	0	200	V
			* 15.531945	33.71	ADR	40.00	0.00	-33.30	40.41	54	-13.59	-	-	0	200	V
			2.511099	54.31	PK-U	32.00	0.00	-44.30	42.01	-	-	68.2	-26.19	0	199	H
			2.514441	54.67	PK-U	32.00	0.00	-44.30	42.37	-	-	68.2	-25.83	0	199	V
			* 10.600052	48.00	PK-U	37.60	0.00	-37.00	48.60	-	-	74	-25.4	1	101	V
			* 10.603747	48.64	PK-U	37.60	0.00	-37.00	49.24	-	-	74	-24.76	1	199	H
			* 10.610589	36.67	ADR	37.60	0.00	-36.90	37.37	54	-16.63	-	-	1	101	V
			* 17.790008	32.72	ADR	41.50	0.00	-31.70	42.52	54	-11.48	-	-	1	101	H
			* 17.803549	44.48	PK-U	41.50	0.00	-31.70	54.28	-	-	74	-19.72	1	101	H
	* 17.815770		33.19	ADR	41.50	0.00	-31.50	43.19	54	-10.81	-	-	1	200	V	
	* 17.843647		44.92	PK-U	41.40	0.00	-31.00	55.32	-	-	74	-18.68	1	200	V	
	* 2.671586		54.42	PK-U	32.30	0.00	-43.50	43.22	-	-	74	-30.78	1	199	V	
	* 2.683709		42.31	ADR	32.30	0.00	-43.50	31.11	54	-22.89	-	-	1	199	V	
	* 2.686335		42.41	ADR	32.20	0.00	-43.50	31.11	54	-22.89	-	-	1	199	H	
	* 2.688171		54.09	PK-U	32.20	0.00	-43.50	42.79	-	-	74	-31.21	1	199	H	
	* 2.679673		54.10	PK-U	32.30	0.00	-43.50	42.90	-	-	74	-31.1	0	200	V	
	* 2.677779		42.37	ADR	32.30	0.00	-43.50	31.17	54	-22.83	-	-	0	200	V	
	* 10.621940		48.06	PK-U	37.60	0.00	-36.80	48.86	-	-	74	-25.14	0	101	H	
	* 10.607088		36.51	ADR	37.60	0.00	-37.00	37.11	54	-16.89	-	-	0	101	H	
	* 17.739180		44.53	PK-U	41.60	0.00	-31.50	54.63	-	-	74	-19.37	0	200	H	
	* 17.733479		32.91	ADR	41.60	0.00	-31.50	43.01	54	-10.99	-	-	0	200	H	
	* 10.613567		48.64	PK-U	37.60	0.00	-36.90	49.34	-	-	74	-24.66	0	200	V	
	* 10.615322		36.79	ADR	37.60	0.00	-36.90	37.49	54	-16.51	-	-	0	200	V	
	* 17.748025		44.75	PK-U	41.50	0.00	-31.50	54.75	-	-	74	-19.25	0	200	V	
	* 17.743963		33.31	ADR	41.60	0.00	-31.50	43.41	54	-10.59	-	-	0	200	V	
	2.647258		54.14	PK-U	32.10	0.00	-43.50	42.74	-	-	68.2	-25.46	0	101	H	

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

40MHz

UNII-1 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/CbI/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT40 SU Mode	5190	6+16	2.995404	59.75	PK-U	32.80	0.00	-48.00	44.55	-	-	68.2	-23.65	0	200	H
			2.995256	59.81	PK-U	32.80	0.00	-48.00	44.61	-	-	68.2	-23.59	0	200	V
			9.950730	56.69	PK-U	37.30	0.00	-45.10	48.89	-	-	68.2	-19.31	0	200	H
			16.987323	53.44	PK-U	41.30	0.00	-40.80	53.94	-	-	68.2	-14.26	0	101	H
			9.937450	56.86	PK-U	37.20	0.00	-45.10	48.96	-	-	68.2	-19.24	0	199	V
			16.997607	54.08	PK-U	41.40	0.00	-40.84	54.64	-	-	68.2	-13.56	0	199	V
	5230		3.008222	59.06	PK-U	32.90	0.00	-47.90	44.06	-	-	68.2	-24.14	0	101	H
			2.993169	59.95	PK-U	32.80	0.00	-48.02	44.73	-	-	68.2	-23.47	0	101	V
			9.956450	56.49	PK-U	37.30	0.00	-45.30	48.49	-	-	68.2	-19.71	0	200	H
			16.992402	54.41	PK-U	41.30	0.00	-40.84	54.87	-	-	68.2	-13.33	0	200	H
			9.979717	56.37	PK-U	37.30	0.00	-45.00	48.67	-	-	68.2	-19.53	0	200	V
			16.983961	54.26	PK-U	41.30	0.00	-40.80	54.76	-	-	68.2	-13.44	0	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

80MHz

UNII-1 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filtr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT80 SU Mode	5210	6+16	* 15.626493	56.08	PK-U	40.30	0.00	-42.76	53.62	-	-	74	-20.38	0	100	H
			* 15.649390	44.24	ADR	40.30	0.00	-42.95	41.59	54	-12.41	-	-	0	100	H
			* 15.621311	55.94	PK-U	40.20	0.00	-42.81	53.33	-	-	74	-20.67	0	201	V
			* 15.644992	44.27	ADR	40.30	0.00	-42.84	41.73	54	-12.27	-	-	0	201	V
			2.595357	43.33	PK-U	32.50	0.00	-26.20	49.63	-	-	68.2	-18.57	0	201	V
			2.611708	43.59	PK-U	32.50	0.00	-26.13	49.96	-	-	68.2	-18.24	0	100	H
			10.412321	56.81	PK-U	37.70	0.00	-45.08	49.43	-	-	68.2	-18.77	0	201	V
			10.421222	57.23	PK-U	37.70	0.00	-45.19	49.74	-	-	68.2	-18.46	0	100	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

160MHz

UNII-1 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filtr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT160 SU Mode	5250	6+16	2.614620	60.29	PK-U	32.30	0.00	-49.43	43.16	-	-	68.2	-25.04	0	201	V
			2.641466	60.20	PK-U	32.30	0.00	-49.39	43.11	-	-	68.2	-25.09	0	100	H
			7.865261	56.89	PK-U	36.00	0.00	-45.66	47.23	-	-	68.2	-20.97	0	100	H
			7.898911	56.64	PK-U	36.00	0.00	-45.95	46.69	-	-	68.2	-21.51	0	201	V
			10.501413	57.19	PK-U	38.00	0.00	-45.84	49.35	-	-	68.2	-18.85	0	100	H
			10.508201	57.44	PK-U	38.00	0.00	-45.78	49.66	-	-	68.2	-18.54	0	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

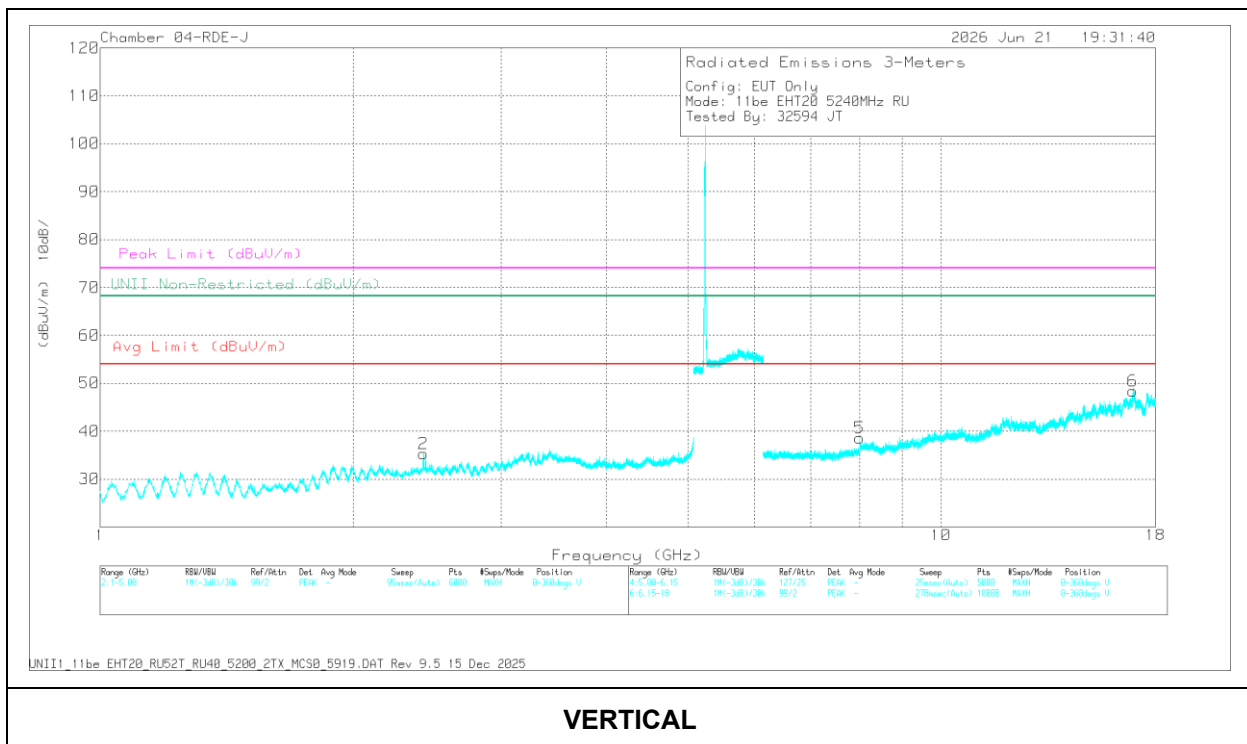
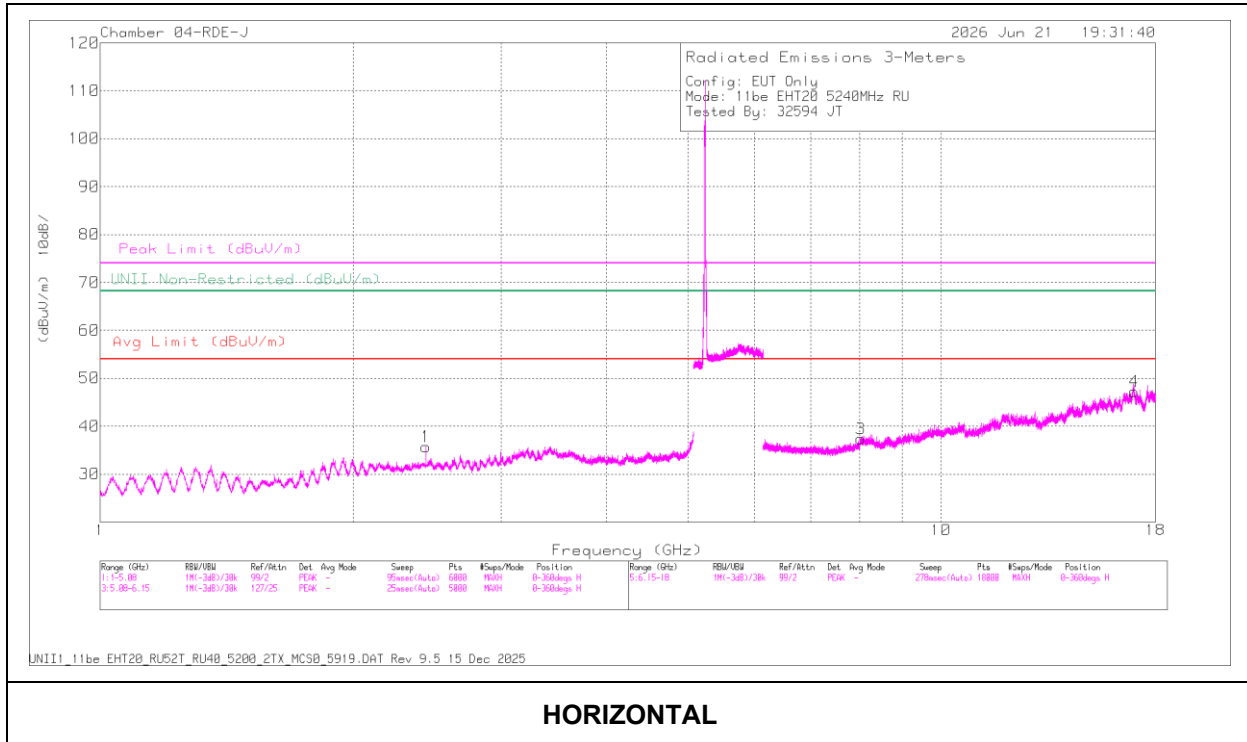
1.1.9. 802.11be MIMO PARTIAL RU MODE IN UNII-1 BAND – SPURIOUS EMISSIONS

UNII-1 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 52T - RU37	5180	6+16	* 3.777835	58.88	PK-U	33.40	0.00	-47.70	44.58	-	-	74	-29.42	0	101	H
			* 3.776428	46.95	ADR	33.40	0.00	-47.70	32.65	54	-21.35	-	-	0	101	H
			* 3.772562	58.78	PK-U	33.40	0.00	-47.74	44.44	-	-	74	-29.56	0	101	V
			* 3.796182	46.93	ADR	33.40	0.00	-47.70	32.63	54	-21.37	-	-	0	101	V
			1.955559	61.97	PK-U	31.70	0.00	-49.16	44.51	-	-	68.2	-23.69	0	101	V
			1.965793	61.97	PK-U	31.80	0.00	-49.10	44.67	-	-	68.2	-23.53	0	101	H
			17.255447	58.59	PK-U	41.00	0.00	-43.70	55.89	-	-	68.2	-12.31	0	101	V
			17.285247	58.60	PK-U	41.00	0.00	-43.62	55.98	-	-	68.2	-12.22	0	101	H
EHT20 52T - RU38	5200	6+16	* 9.035583	52.75	PK-U	36.10	0.00	-40.50	48.35	-	-	74	-25.65	0	200	H
			* 9.056645	40.65	ADR	36.10	0.00	-40.50	36.25	54	-17.75	-	-	0	200	H
			* 15.662849	53.59	PK-U	41.10	0.00	-39.50	55.19	-	-	74	-18.81	0	101	H
			* 15.664512	41.59	ADR	41.10	0.00	-39.50	43.19	54	-10.81	-	-	0	101	H
			* 9.010908	52.41	PK-U	36.10	0.00	-40.40	48.11	-	-	74	-25.89	0	101	V
			* 9.011183	40.60	ADR	36.10	0.00	-40.40	36.30	54	-17.7	-	-	0	101	V
			* 15.574495	52.71	PK-U	41.00	0.00	-38.90	54.81	-	-	74	-19.19	0	200	V
			* 15.605806	40.86	ADR	41.00	0.00	-39.40	42.46	54	-11.54	-	-	0	200	V
			2.581101	56.48	PK-U	32.60	0.00	-46.00	43.08	-	-	68.2	-25.12	0	101	V
			2.582616	56.18	PK-U	32.60	0.00	-46.00	42.78	-	-	68.2	-25.42	0	101	H
EHT20 52T - RU40	5240	6+16	* 8.045101	51.82	PK-U	36.00	0.00	-40.20	47.62	-	-	74	-26.38	336	199	H
			2.426883	59.77	PK-U	32.30	0.00	-46.20	45.87	-	-	68.2	-22.33	353	200	H
			2.437735	59.46	PK-U	32.30	0.00	-46.20	45.56	-	-	68.2	-22.64	304	101	V
			8.000660	51.36	PK-U	36.00	0.00	-40.60	46.76	-	-	68.2	-21.44	200	239	V
			16.928913	52.93	PK-U	42.20	0.00	-37.00	58.13	-	-	68.2	-10.07	153	209	V
			17.011359	52.66	PK-U	42.00	0.00	-38.10	56.56	-	-	68.2	-11.64	336	101	H
			2.596543	62.05	PK-U	32.40	0.00	-49.53	44.92	-	-	68.2	-23.28	0	201	V
EHT80 484+242T - RU93	5210	6+16	2.604616	60.10	PK-U	32.30	0.00	-49.51	42.89	-	-	68.2	-25.31	0	100	H
			10.410329	57.62	PK-U	37.90	0.00	-45.80	49.72	-	-	68.2	-18.48	0	100	H
			10.436835	57.65	PK-U	38.00	0.00	-45.86	49.79	-	-	68.2	-18.41	0	201	V
			* 15.625030	44.44	ADR	41.20	0.00	-43.69	41.95	54	-12.05	-	-	0	100	H
			* 15.626670	56.48	PK-U	41.20	0.00	-43.68	54.00	-	-	74	-20	0	100	H
			* 15.627664	56.68	PK-U	41.20	0.00	-43.65	54.23	-	-	74	-19.77	0	200	V
			* 15.633002	44.44	ADR	41.20	0.00	-43.61	42.03	54	-11.97	-	-	0	200	V
EHT160 996+484T - RU95	5250	6+16	* 2.661164	60.33	PK-U	32.50	0.00	-49.35	43.48	-	-	74	-30.52	0	100	H
			10.519717	57.04	PK-U	38.00	0.00	-45.71	49.33	-	-	68.2	-18.87	0	100	H
			10.524164	57.00	PK-U	38.00	0.00	-45.70	49.30	-	-	68.2	-18.9	0	201	V
			15.141786	57.21	PK-U	40.60	0.00	-44.15	53.66	-	-	68.2	-14.54	0	200	V
			15.146352	56.39	PK-U	40.60	0.00	-44.21	52.78	-	-	68.2	-15.42	0	100	H
			2.642363	60.15	PK-U	32.40	0.00	-49.40	43.15	-	-	68.2	-25.05	0	201	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

WORST-CASE HARMONICS AND SPURIOUS EMISSIONS**802.11be EHT20 / 5240 MHz / 2TX CDD / 52T RU40**

Radiated Emissions

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filt/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	* 8.045101	51.82	PK-U	36.00	0.00	-40.20	47.62	-	-	74	-26.38	336	199	H
1	2.426883	59.77	PK-U	32.30	0.00	-46.20	45.87	-	-	68.2	-22.33	353	200	H
2	2.437735	59.46	PK-U	32.30	0.00	-46.20	45.56	-	-	68.2	-22.64	304	101	V
5	8.000660	51.36	PK-U	36.00	0.00	-40.60	46.76	-	-	68.2	-21.44	200	239	V
6	16.928913	52.93	PK-U	42.20	0.00	-37.00	58.13	-	-	68.2	-10.07	153	209	V
4	17.011359	52.66	PK-U	42.00	0.00	-38.10	56.56	-	-	68.2	-11.64	336	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.1.10. 802.11n/ac SISO MODE IN UNII-2A BAND – BANDEDGE**20MHz**

UNII-2A (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cb/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
HT20	5320	6	* 5.350000	62.35	Pk	34.50	0.00	-33.40	63.45	-	-	74	-10.55	173	221	H
			* 5.350995	63.04	Pk	34.60	0.00	-33.40	64.24	-	-	74	-9.76	173	221	H
			* 5.350000	47.21	RMS	34.50	0.00	-33.40	48.31	54	-5.69	-	-	173	221	H
			* 5.350391	48.29	RMS	34.50	0.00	-33.40	49.39	54	-4.61	-	-	173	221	H
			* 5.350000	62.86	Pk	34.50	0.00	-33.40	63.96	-	-	74	-10.04	225	134	V
			* 5.350969	66.08	Pk	34.60	0.00	-33.40	67.28	-	-	74	-6.72	225	134	V
			* 5.350000	48.78	RMS	34.50	0.00	-33.40	49.88	54	-4.12	-	-	225	134	V
			* 5.350181	49.76	RMS	34.50	0.00	-33.40	50.86	54	-3.14	-	-	225	134	V
		16	* 5.350000	64.48	Pk	34.60	0.00	-32.36	66.72	-	-	74	-7.28	186	296	H
			* 5.350495	66.23	Pk	34.60	0.00	-32.35	68.48	-	-	74	-5.52	186	296	H
			* 5.350000	48.39	RMS	34.60	0.00	-32.36	50.63	54	-3.37	-	-	186	296	H
			* 5.350169	48.50	RMS	34.60	0.00	-32.36	50.74	54	-3.26	-	-	186	296	H
			* 5.350000	55.38	Pk	34.60	0.00	-32.36	57.62	-	-	74	-16.38	94	195	V
			* 5.373058	57.42	Pk	34.50	0.00	-32.35	59.57	-	-	74	-14.43	94	195	V
			* 5.350000	44.58	RMS	34.60	0.00	-32.36	46.82	54	-7.18	-	-	94	195	V
			* 5.351032	45.20	RMS	34.60	0.00	-32.34	47.46	54	-6.54	-	-	94	195	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

40MHz

UNII-2A (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cb/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
HT40	5310	6	* 5.350000	62.23	Pk	35.00	0.00	-30.70	66.53	-	-	74	-7.47	345	384	H
			* 5.353909	64.27	Pk	35.00	0.00	-30.70	68.57	-	-	74	-5.43	345	384	H
			* 5.350000	44.78	RMS	35.00	0.00	-30.70	49.08	54	-4.92	-	-	345	384	H
			* 5.350234	45.52	RMS	35.00	0.00	-30.70	49.82	54	-4.18	-	-	345	384	H
			* 5.350000	59.09	Pk	35.00	0.00	-30.70	63.39	-	-	74	-10.61	177	250	V
			* 5.350024	62.00	Pk	35.00	0.00	-30.70	66.30	-	-	74	-7.7	177	250	V
			* 5.350000	43.68	RMS	35.00	0.00	-30.70	47.98	54	-6.02	-	-	177	250	V
			* 5.350181	44.32	RMS	35.00	0.00	-30.70	48.62	54	-5.38	-	-	177	250	V
		16	* 5.350000	65.82	Pk	34.50	0.00	-34.57	65.75	-	-	74	-8.25	58	201	H
			* 5.350285	68.95	Pk	34.50	0.00	-34.57	68.88	-	-	74	-5.12	58	201	H
			* 5.350000	48.30	RMS	34.50	0.00	-34.57	48.23	54	-5.77	-	-	58	201	H
			* 5.350215	49.43	RMS	34.50	0.00	-34.57	49.36	54	-4.64	-	-	58	201	H
			* 5.350000	56.74	Pk	34.50	0.00	-34.57	56.67	-	-	74	-17.33	137	111	V
			* 5.350449	59.37	Pk	34.50	0.00	-34.57	59.30	-	-	74	-14.70	137	111	V
			* 5.350000	45.41	RMS	34.50	0.00	-34.57	45.34	54	-8.66	-	-	137	111	V
			* 5.350285	46.15	RMS	34.50	0.00	-34.57	46.08	54	-7.92	-	-	137	111	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

80MHz

UNII-2A (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
VHT80	5290	6	* 5.350000	59.37	Pk	35.00	0.00	-30.70	63.67	-	-	74	-10.33	180	368	H
			* 5.350470	63.37	Pk	35.00	0.00	-30.70	67.67	-	-	74	-6.33	180	368	H
			* 5.350000	46.59	RMS	35.00	0.00	-30.70	50.89	54	-3.11	-	-	180	368	H
			* 5.350391	47.00	RMS	35.00	0.00	-30.70	51.30	54	-2.7	-	-	180	368	H
			* 5.350000	56.63	Pk	35.00	0.00	-30.70	60.93	-	-	74	-13.07	190	266	V
			* 5.353699	58.57	Pk	35.00	0.00	-30.70	62.87	-	-	74	-11.13	190	266	V
		16	* 5.350000	43.49	RMS	35.00	0.00	-30.70	47.79	54	-6.21	-	-	190	266	V
			* 5.350024	44.50	RMS	35.00	0.00	-30.70	48.80	54	-5.2	-	-	190	266	V
			* 5.350000	63.20	Pk	34.60	0.00	-32.36	65.44	-	-	74	-8.56	152	214	H
			* 5.357705	66.37	Pk	34.60	0.00	-32.29	68.68	-	-	74	-5.32	152	214	H
			* 5.350000	47.16	RMS	34.60	0.00	-32.36	49.40	54	-4.60	-	-	152	214	H
			* 5.353925	47.85	RMS	34.60	0.00	-32.35	50.10	54	-3.90	-	-	152	214	H
			* 5.350000	55.36	Pk	34.60	0.00	-32.36	57.60	-	-	74	-16.40	75	167	V
			* 5.352875	58.27	Pk	34.60	0.00	-32.33	60.54	-	-	74	-13.46	75	167	V
			* 5.350000	44.85	RMS	34.60	0.00	-32.36	47.09	54	-6.91	-	-	75	167	V
			* 5.451830	45.30	RMS	34.60	0.00	-32.33	47.57	54	-6.43	-	-	75	167	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

160MHz

UNII-2A (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
VHT160	5250 (Straddle)	6	* 5.350000	51.78	Pk	35.00	0.00	-30.70	56.08	-	-	74	-17.92	140	300	H
			* 5.401637	62.49	Pk	35.00	0.00	-30.70	66.79	-	-	74	-7.21	140	300	H
			* 5.350000	39.62	RMS	35.00	0.10	-30.70	44.02	54	-9.98	-	-	140	300	H
			* 5.400325	42.71	RMS	35.00	0.10	-30.70	47.11	54	-6.89	-	-	140	300	H
			* 5.350000	52.31	Pk	35.00	0.00	-30.70	56.61	-	-	74	-17.39	183	175	V
			* 5.400272	65.15	Pk	35.00	0.00	-30.70	69.45	-	-	74	-4.55	183	175	V
		16	* 5.350000	40.59	RMS	35.00	0.10	-30.70	44.99	54	-9.01	-	-	183	175	V
			* 5.404893	43.83	RMS	35.00	0.10	-30.70	48.23	54	-5.77	-	-	183	175	V
			* 5.350000	44.88	Pk	34.50	0.00	-23.10	56.28	-	-	74	-17.72	348	102	H
			* 5.401688	57.78	Pk	34.60	0.00	-23.20	69.18	-	-	74	-4.82	348	102	H
			* 5.350000	31.22	RMS	34.50	0.10	-23.10	42.72	54	-11.28	-	-	348	102	H
			* 5.397628	35.88	RMS	34.60	0.10	-23.10	47.48	54	-6.52	-	-	348	102	H
			* 5.350000	39.13	Pk	34.50	0.00	-23.10	50.53	-	-	74	-23.47	248	102	V
			* 5.400241	44.09	Pk	34.60	0.00	-23.10	55.59	-	-	74	-18.41	248	102	V
			* 5.350000	28.17	RMS	34.50	0.10	-23.10	39.67	54	-14.33	-	-	248	102	V
			* 5.447514	29.83	RMS	34.60	0.10	-23.20	41.33	54	-12.67	-	-	248	102	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.11. 802.11n/ac MIMO MODE IN UNII-2A BAND - BANDEDGE

UNII-2A (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/CbI/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
HT20	5320	6+16	* 5.350000	60.83	Pk	34.50	0.00	-33.40	61.93	-	-	74	-12.07	186	254	H
			* 5.350155	63.79	Pk	34.50	0.00	-33.40	64.89	-	-	74	-9.11	186	254	H
			* 5.350000	46.57	RMS	34.50	0.00	-33.40	47.67	54	-6.33	-	-	186	254	H
			* 5.350234	46.98	RMS	34.50	0.00	-33.40	48.08	54	-5.92	-	-	186	254	H
			* 5.350000	66.32	Pk	34.50	0.00	-33.40	67.42	-	-	74	-6.58	241	150	V
			* 5.353699	67.63	Pk	34.60	0.00	-33.40	68.83	-	-	74	-5.17	241	150	V
			* 5.350000	48.78	RMS	34.50	0.00	-33.40	49.88	54	-4.12	-	-	241	150	V
			* 5.350076	50.05	RMS	34.50	0.00	-33.40	51.15	54	-2.85	-	-	241	150	V
HT40	5310	6+16	* 5.350000	62.59	Pk	34.50	0.00	-34.20	62.89	-	-	74	-11.11	177	235	H
			* 5.353279	64.04	Pk	34.60	0.00	-34.10	64.54	-	-	74	-9.46	177	235	H
			* 5.350000	44.62	RMS	34.50	0.00	-34.20	44.92	54	-9.08	-	-	177	235	H
			* 5.353936	45.46	RMS	34.60	0.00	-34.10	45.96	54	-8.04	-	-	177	235	H
			* 5.350000	66.04	Pk	34.50	0.00	-34.20	66.34	-	-	74	-7.66	229	195	V
			* 5.354303	68.71	Pk	34.60	0.00	-34.10	69.21	-	-	74	-4.79	229	195	V
			* 5.350000	47.15	RMS	34.50	0.00	-34.20	47.45	54	-6.55	-	-	229	195	V
			* 5.350103	48.57	RMS	34.50	0.00	-34.20	48.87	54	-5.13	-	-	229	195	V
VHT80	5290	6+16	* 5.350000	47.53	Pk	34.30	0.00	-16.50	65.33	-	-	74	-8.67	331	196	H
			* 5.351337	50.84	Pk	34.30	0.00	-16.50	68.64	-	-	74	-5.36	331	196	H
			* 5.350000	31.42	RMS	34.30	0.00	-16.50	49.22	54	-4.78	-	-	331	196	H
			* 5.350602	32.94	RMS	34.30	0.00	-16.50	50.74	54	-3.26	-	-	331	196	H
			* 5.350000	39.94	Pk	34.30	0.00	-16.50	57.74	-	-	74	-16.26	64	194	V
			* 5.353043	43.76	Pk	34.30	0.00	-16.50	61.56	-	-	74	-12.44	64	194	V
			* 5.350000	27.93	RMS	34.30	0.00	-16.50	45.73	54	-8.27	-	-	64	194	V
			* 5.353857	28.83	RMS	34.30	0.00	-16.50	46.63	54	-7.37	-	-	64	194	V
VHT160	5250 (Straddle)	6+16	* 5.350000	56.89	Pk	34.50	0.00	-34.20	57.19	-	-	74	-16.81	166	228	H
			* 5.400036	68.48	Pk	34.60	0.00	-34.10	68.98	-	-	74	-5.02	166	228	H
			* 5.350000	41.60	RMS	34.50	0.10	-34.20	42.00	54	-12	-	-	166	228	H
			* 5.400482	45.41	RMS	34.60	0.10	-34.10	46.01	54	-7.99	-	-	166	228	H
			* 5.350000	49.80	Pk	34.50	0.00	-34.20	50.10	-	-	74	-23.9	264	143	V
			* 5.402635	61.85	Pk	34.60	0.00	-34.10	62.35	-	-	74	-11.65	264	143	V
			* 5.350000	38.86	RMS	34.50	0.10	-34.20	39.26	54	-14.74	-	-	264	143	V
			* 5.401769	41.43	RMS	34.60	0.10	-34.10	42.03	54	-11.97	-	-	264	143	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.12. 802.11be SISO SU MODE IN UNII-2A BAND – BANDEDGE**20MHz**

UNII-2A (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 SU Mode	5320	6	* 5.350000	45.77	Pk	34.30	0.00	-16.50	63.57	-	-	74	-10.43	322	226	H
			* 5.350654	49.21	Pk	34.30	0.00	-16.50	67.01	-	-	74	-6.99	322	226	H
			* 5.350000	33.08	RMS	34.30	0.00	-16.50	50.88	54	-3.12	-	-	322	226	H
			* 5.350812	33.55	RMS	34.30	0.00	-16.50	51.35	54	-2.65	-	-	322	226	H
			* 5.350000	38.68	Pk	34.30	0.00	-16.50	56.48	-	-	74	-17.52	285	288	V
			* 5.351258	41.20	Pk	34.30	0.00	-16.50	59.00	-	-	74	-15.00	285	288	V
			* 5.350000	27.83	RMS	34.30	0.00	-16.50	45.63	54	-8.37	-	-	285	288	V
			* 5.413451	28.63	RMS	34.40	0.00	-16.20	46.83	54	-7.17	-	-	285	288	V
		16	* 5.350000	48.72	Pk	34.30	0.00	-16.50	66.52	-	-	74	-7.48	328	190	H
			* 5.350155	50.14	Pk	34.30	0.00	-16.50	67.94	-	-	74	-6.06	328	190	H
			* 5.350000	32.97	RMS	34.30	0.00	-16.50	50.77	54	-3.23	-	-	328	190	H
			* 5.350602	33.50	RMS	34.30	0.00	-16.50	51.30	54	-2.70	-	-	328	190	H
			* 5.350000	40.15	Pk	34.30	0.00	-16.50	57.95	-	-	74	-16.05	255	182	V
			* 5.350628	41.01	Pk	34.30	0.00	-16.50	58.81	-	-	74	-15.19	255	182	V
			* 5.350000	27.95	RMS	34.30	0.00	-16.50	45.75	54	-8.25	-	-	255	182	V
			* 5.350654	28.39	RMS	34.30	0.00	-16.50	46.19	54	-7.81	-	-	255	182	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

40MHz

UNII-2A (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT40 SU Mode	5310	6	* 5.350000	68.12	Pk	34.80	0.00	-37.20	65.72	-	-	74	-8.28	319	290	H
			* 5.353435	71.16	Pk	34.90	0.00	-37.20	68.86	-	-	74	-5.14	319	290	H
			* 5.350000	50.86	RMS	34.80	0.00	-37.20	48.46	54	-5.54	-	-	319	290	H
			* 5.350052	52.90	RMS	34.80	0.00	-37.20	50.50	54	-3.50	-	-	319	290	H
			* 5.350000	60.67	Pk	34.80	0.00	-37.20	58.27	-	-	74	-15.73	271	116	V
			* 5.350285	63.77	Pk	34.80	0.00	-37.20	61.37	-	-	74	-12.63	271	116	V
			* 5.350000	46.62	RMS	34.80	0.00	-37.20	44.22	54	-9.78	-	-	271	116	V
			* 5.351079	47.67	RMS	34.90	0.00	-37.20	45.37	54	-8.63	-	-	271	116	V
		16	* 5.350000	58.26	Pk	34.50	0.00	-32.57	60.19	-	-	74	-13.81	44	149	H
			* 5.353365	61.28	Pk	34.50	0.00	-32.61	63.17	-	-	74	-10.83	44	149	H
			* 5.350000	45.22	RMS	34.50	0.00	-32.57	47.15	54	-6.85	-	-	44	149	H
			* 5.351032	45.76	RMS	34.60	0.00	-32.58	47.78	54	-6.22	-	-	44	149	H
			* 5.350000	62.11	Pk	34.50	0.00	-32.57	64.04	-	-	74	-9.96	60	190	V
			* 5.350075	67.02	Pk	34.50	0.00	-32.57	68.95	-	-	74	-5.05	60	190	V
			* 5.350000	47.65	RMS	34.50	0.00	-32.57	49.58	54	-4.42	-	-	60	190	V
			* 5.350635	48.74	RMS	34.60	0.00	-32.58	50.76	54	-3.24	-	-	60	190	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

80MHz

UNII-2A (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filt/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT80 SU Mode	5290	6	* 5.350000	69.00	Pk	34.80	0.00	-37.20	66.60	-	-	74	-7.40	320	289	H
			* 5.365358	71.76	Pk	34.90	0.00	-37.60	69.06	-	-	74	-4.94	320	289	H
			* 5.350000	51.17	RMS	34.80	0.00	-37.20	48.77	54	-5.23	-	-	320	289	H
			* 5.354159	51.66	RMS	34.90	0.00	-37.20	49.36	54	-4.64	-	-	320	289	H
			* 5.350000	62.00	Pk	34.80	0.00	-37.20	59.60	-	-	74	-14.40	289	122	V
			* 5.365265	64.62	Pk	34.90	0.00	-37.60	61.92	-	-	74	-12.08	289	122	V
		16	* 5.350000	47.27	RMS	34.80	0.00	-37.20	44.87	54	-9.13	-	-	289	122	V
			* 5.352479	47.80	RMS	34.90	0.00	-37.20	45.50	54	-8.50	-	-	289	122	V
			* 5.350000	69.86	Pk	34.80	0.00	-37.20	67.46	-	-	74	-6.54	316	292	H
			* 5.351522	71.71	Pk	34.90	0.00	-37.20	69.41	-	-	74	-4.59	316	292	H
			* 5.350000	50.15	RMS	34.80	0.00	-37.20	47.75	54	-6.25	-	-	316	292	H
			* 5.353295	52.26	RMS	34.90	0.00	-37.20	49.96	54	-4.04	-	-	316	292	H
			* 5.350000	64.12	Pk	34.80	0.00	-37.20	61.72	-	-	74	-12.28	52	253	V
			* 5.351195	66.14	Pk	34.90	0.00	-37.20	63.84	-	-	74	-10.16	52	253	V
			* 5.350000	46.46	RMS	34.80	0.00	-37.20	44.06	54	-9.94	-	-	52	253	V
			* 5.352152	47.22	RMS	34.90	0.00	-37.20	44.92	54	-9.08	-	-	52	253	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

160MHz

UNII-2A (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filt/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT160 SU Mode	5250 (Straddle)	6	* 5.350000	68.80	Pk	34.60	0.00	-39.50	63.90	-	-	74	-10.10	322	197	H
			* 5.397161	74.22	Pk	34.60	0.00	-39.40	69.42	-	-	74	-4.58	322	197	H
			* 5.350000	52.00	RMS	34.60	0.14	-39.50	47.24	54	-6.76	-	-	322	197	H
			* 5.400241	54.61	RMS	34.60	0.14	-39.42	49.93	54	-4.07	-	-	322	197	H
			* 5.350000	63.94	Pk	34.60	0.00	-39.50	59.04	-	-	74	-14.96	57	201	V
			* 5.405561	67.61	Pk	34.60	0.00	-39.40	62.81	-	-	74	-11.19	57	201	V
		16	* 5.350000	49.30	RMS	34.60	0.14	-39.50	44.54	54	-9.46	-	-	57	201	V
			* 5.404348	50.36	RMS	34.60	0.14	-39.40	45.70	54	-8.30	-	-	57	201	V
			* 5.350000	67.24	Pk	34.80	0.00	-37.20	64.84	-	-	74	-9.16	326	111	H
			* 5.402318	71.23	Pk	35.00	0.00	-37.53	68.70	-	-	74	-5.30	326	111	H
			* 5.350000	48.95	RMS	34.80	0.14	-37.20	46.69	54	-7.31	-	-	326	111	H
			* 5.409948	51.70	RMS	35.00	0.14	-37.59	49.25	54	-4.75	-	-	326	111	H
			* 5.350000	57.71	Pk	34.80	0.00	-37.20	55.31	-	-	74	-18.69	248	220	V
			* 5.408851	60.84	Pk	35.00	0.00	-37.51	58.33	-	-	74	-15.67	248	220	V
			* 5.350000	45.60	RMS	34.80	0.14	-37.20	43.34	54	-10.66	-	-	248	220	V
			* 5.352969	46.82	RMS	34.90	0.14	-37.20	44.66	54	-9.34	-	-	248	220	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.13. 802.11be SISO PARTIAL RU MODE IN UNII-2A BAND – BANDEDGE

UNII-2A (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl /Filtr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 52T - RU40	5320	6	* 5.350000	54.38	Pk	35.00	0.00	-30.70	58.68	-	-	74	-15.32	15	303	H
			* 5.351783	57.97	Pk	35.00	0.00	-30.70	62.27	-	-	74	-11.73	15	303	H
			* 5.350000	40.16	RMS	35.00	0.00	-30.70	44.46	54	-9.54	-	-	15	303	H
			* 5.363649	41.30	RMS	35.00	0.00	-30.70	45.60	54	-8.40	-	-	15	303	H
			* 5.350000	52.97	Pk	35.00	0.00	-30.70	57.27	-	-	74	-16.73	18	213	V
			* 5.350680	55.83	Pk	35.00	0.00	-30.70	60.13	-	-	74	-13.87	18	213	V
		16	* 5.350000	40.01	RMS	35.00	0.00	-30.70	44.31	54	-9.69	-	-	18	213	V
			* 5.351757	40.84	RMS	35.00	0.00	-30.70	45.14	54	-8.86	-	-	18	213	V
			* 5.350000	54.71	Pk	34.50	0.00	-34.20	55.01	-	-	74	-18.99	187	229	H
			* 5.350050	56.45	Pk	34.50	0.00	-34.20	56.75	-	-	74	-17.25	187	229	H
			* 5.350000	40.68	RMS	34.50	0.00	-34.20	40.98	54	-13.02	-	-	187	229	H
			* 5.350391	41.38	RMS	34.50	0.00	-34.20	41.68	54	-12.32	-	-	187	229	H
			* 5.350000	52.39	Pk	34.50	0.00	-34.20	52.69	-	-	74	-21.31	116	380	V
			* 5.407859	53.35	Pk	34.60	0.00	-34.10	53.85	-	-	74	-20.15	116	380	V
			* 5.350000	40.14	RMS	34.50	0.00	-34.20	40.44	54	-13.56	-	-	116	380	V
			* 5.375227	40.76	RMS	34.60	0.00	-34.10	41.26	54	-12.74	-	-	116	380	V
EHT80 484+242 T - RU90	5290	6	* 5.350000	68.24	Pk	34.70	0.00	-37.18	65.76	-	-	74	-8.24	212	245	H
			* 5.357145	71.84	Pk	34.80	0.00	-37.21	69.43	-	-	74	-4.57	212	245	H
			* 5.350000	47.95	RMS	34.70	0.00	-37.18	45.47	54	-8.53	-	-	212	245	H
			* 5.359058	50.51	RMS	34.80	0.00	-37.24	48.07	54	-5.93	-	-	212	245	H
			* 5.350000	63.28	Pk	34.70	0.00	-37.18	60.80	-	-	74	-13.20	58	127	V
			* 5.358148	67.83	Pk	34.80	0.00	-37.24	65.39	-	-	74	-8.61	58	127	V
		16	* 5.350000	47.33	RMS	34.70	0.00	-37.18	44.85	54	-9.15	-	-	58	127	V
			* 5.357682	48.33	RMS	34.80	0.00	-37.23	45.90	54	-8.10	-	-	58	127	V
			* 5.350000	60.04	Pk	34.60	0.00	-32.36	62.28	-	-	74	-11.72	89	102	H
			* 5.357962	66.70	Pk	34.60	0.00	-32.30	69.00	-	-	74	-5.00	89	102	H
			* 5.350000	46.14	RMS	34.60	0.00	-32.36	48.38	54	-5.62	-	-	89	102	H
			* 5.351359	46.83	RMS	34.60	0.00	-32.33	49.10	54	-4.90	-	-	89	102	H
			* 5.350000	54.92	Pk	34.60	0.00	-32.36	57.16	-	-	74	-16.84	136	324	V
			* 5.356608	59.36	Pk	34.60	0.00	-32.29	61.67	-	-	74	-12.33	136	324	V
			* 5.350000	44.23	RMS	34.60	0.00	-32.36	46.47	54	-7.53	-	-	136	324	V
			* 5.363445	45.24	RMS	34.60	0.00	-32.34	47.50	54	-6.50	-	-	136	324	V
EHT160 996+484 T - RU94	5250	6	* 5.350000	66.17	Pk	34.60	0.00	-39.50	61.27	-	-	74	-12.73	322	198	H
			* 5.376885	73.99	Pk	34.60	0.00	-39.50	69.09	-	-	74	-4.91	322	198	H
			* 5.350000	49.55	RMS	34.60	0.00	-39.50	44.65	54	-9.35	-	-	322	198	H
			* 5.375158	51.85	RMS	34.60	0.00	-39.50	46.95	54	-7.05	-	-	322	198	H
			* 5.350000	61.88	Pk	34.60	0.00	-39.50	56.98	-	-	74	-17.02	57	201	V
			* 5.376302	68.15	Pk	34.60	0.00	-39.50	63.25	-	-	74	-10.75	57	201	V
		16	* 5.350000	47.84	RMS	34.60	0.00	-39.50	42.94	54	-11.06	-	-	57	201	V
			* 5.374995	49.64	RMS	34.60	0.00	-39.50	44.74	54	-9.26	-	-	57	201	V
			* 5.350000	64.60	Pk	34.80	0.00	-37.20	62.20	-	-	74	-11.80	325	112	H
			* 5.376862	71.64	Pk	34.90	0.00	-37.50	69.04	-	-	74	-4.96	325	112	H
			* 5.350000	48.38	RMS	34.80	0.00	-37.20	45.98	54	-8.02	-	-	325	112	H
			* 5.377445	50.36	RMS	34.90	0.00	-37.54	47.72	54	-6.28	-	-	325	112	H
			* 5.350000	56.26	Pk	34.80	0.00	-37.20	53.86	-	-	74	-20.14	249	219	V
			* 5.354065	58.62	Pk	34.90	0.00	-37.20	56.32	-	-	74	-17.68	249	219	V
			* 5.350000	45.78	RMS	34.80	0.00	-37.20	43.38	54	-10.62	-	-	249	219	V
			* 5.354555	46.74	RMS	34.90	0.00	-37.20	44.44	54	-9.56	-	-	249	219	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.14. 802.11be MIMO SU MODE IN UNII-2A BAND – BANDEDGE

UNII-2A (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filt/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 SU Mode	5320	6+16	* 5.350000	69.62	Pk	34.40	0.00	-37.70	66.32	-	-	74	-7.68	144	232	H
			* 5.350215	72.57	Pk	34.40	0.00	-37.70	69.27	-	-	74	-4.73	144	232	H
			* 5.350000	53.62	RMS	34.40	0.00	-37.70	50.32	54	-3.68	-	-	144	232	H
			* 5.350005	53.83	RMS	34.40	0.00	-37.70	50.53	54	-3.47	-	-	144	232	H
			* 5.350000	57.85	Pk	34.40	0.00	-37.70	54.55	-	-	74	-19.45	250	325	V
			* 5.379731	59.58	Pk	34.50	0.00	-37.70	56.38	-	-	74	-17.62	250	325	V
			* 5.350000	47.23	RMS	34.40	0.00	-37.70	43.93	54	-10.07	-	-	250	325	V
			* 5.405211	47.32	RMS	34.50	0.00	-37.50	44.32	54	-9.68	-	-	250	325	V
EHT40 SU Mode	5310	6+16	* 5.350000	68.11	Pk	34.80	0.00	-37.20	65.71	-	-	74	-8.29	28	282	H
			* 5.353855	71.72	Pk	34.90	0.00	-37.20	69.42	-	-	74	-4.58	28	282	H
			* 5.350000	51.64	RMS	34.80	0.00	-37.20	49.24	54	-4.76	-	-	28	282	H
			* 5.353529	52.17	RMS	34.90	0.00	-37.20	49.87	54	-4.13	-	-	28	282	H
			* 5.350000	58.24	Pk	34.80	0.00	-37.20	55.84	-	-	74	-18.16	284	144	V
			* 5.350332	59.93	Pk	34.80	0.00	-37.20	57.53	-	-	74	-16.47	284	144	V
			* 5.350000	46.59	RMS	34.80	0.00	-37.20	44.19	54	-9.81	-	-	284	144	V
			* 5.352199	47.12	RMS	34.90	0.00	-37.20	44.82	54	-9.18	-	-	284	144	V
EHT80 SU Mode	5290	6+16	* 5.350000	64.05	Pk	34.50	0.00	-35.37	63.18	-	-	74	-10.82	335	149	H
			* 5.358335	69.76	Pk	34.50	0.00	-35.35	68.91	-	-	74	-5.09	335	149	H
			* 5.350000	46.93	RMS	34.50	0.00	-35.37	46.06	54	-7.94	-	-	335	149	H
			* 5.353295	49.99	RMS	34.50	0.00	-35.37	49.12	54	-4.88	-	-	335	149	H
			* 5.350000	63.45	Pk	34.50	0.00	-35.37	62.58	-	-	74	-11.42	172	398	V
			* 5.354835	64.85	Pk	34.50	0.00	-35.36	63.99	-	-	74	-10.01	172	398	V
			* 5.350000	45.99	RMS	34.50	0.00	-35.37	45.12	54	-8.88	-	-	172	398	V
			* 5.353015	47.20	RMS	34.50	0.00	-35.37	46.33	54	-7.67	-	-	172	398	V
EHT160 SU Mode	5250 (Straddle)	6+16	* 5.350000	69.87	Pk	34.60	0.00	-39.50	64.97	-	-	74	-9.03	28	224	H
			* 5.408641	73.70	Pk	34.60	0.00	-39.46	68.84	-	-	74	-5.16	28	224	H
			* 5.350000	52.76	RMS	34.60	0.14	-39.50	48.00	54	-6.00	-	-	28	224	H
			* 5.403834	55.61	RMS	34.60	0.14	-39.40	50.95	54	-3.05	-	-	28	224	H
			* 5.350000	60.17	Pk	34.60	0.00	-39.50	55.27	-	-	74	-18.73	220	374	V
			* 5.408781	62.66	Pk	34.60	0.00	-39.48	57.78	-	-	74	-16.22	220	374	V
			* 5.350000	46.83	RMS	34.60	0.14	-39.50	42.07	54	-11.93	-	-	220	374	V
			* 5.404254	48.15	RMS	34.60	0.14	-39.40	43.49	54	-10.51	-	-	220	374	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

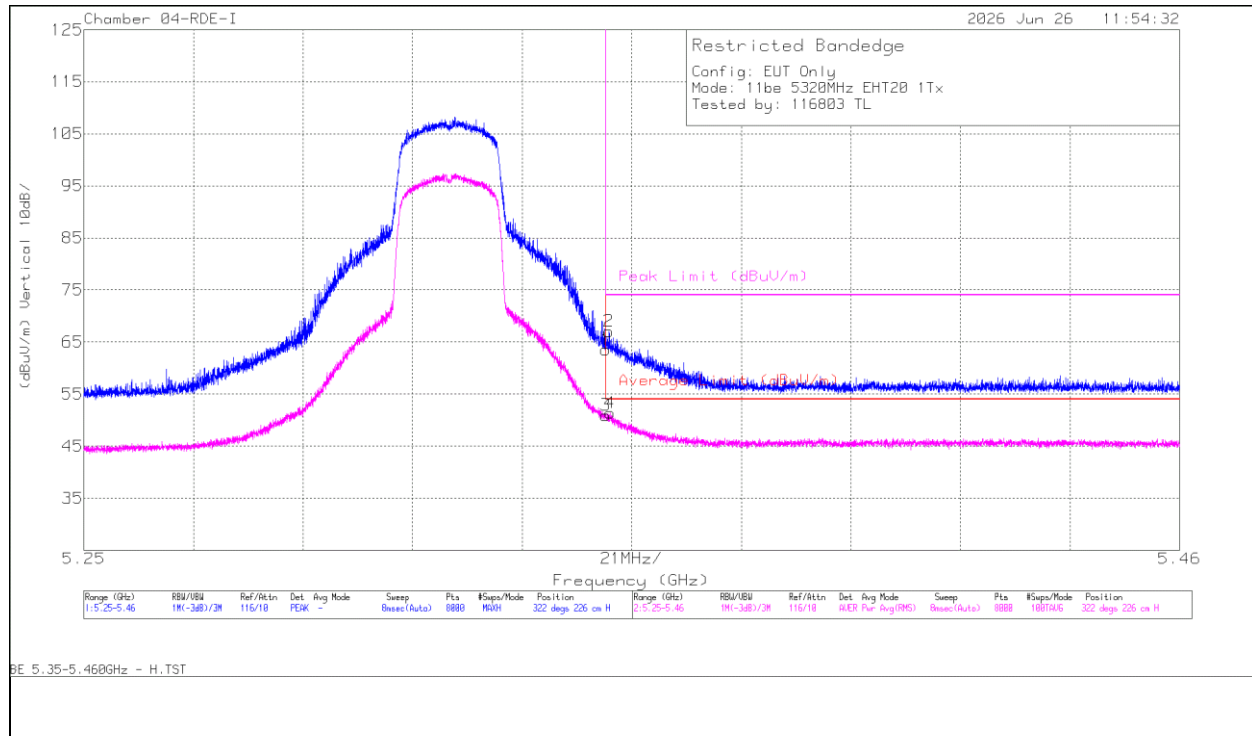
1.1.15. 802.11be MIMO PARTIAL RU MODE IN UNII-2A BAND – BANDEDGE

UNII-2A (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filtr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 52T - RU40	5320	6+16	* 5.350000	65.13	Pk	34.50	0.00	-35.30	64.33	-	-	74	-9.67	325	226	H
			* 5.350005	65.15	Pk	34.50	0.00	-35.30	64.35	-	-	74	-9.65	325	226	H
			* 5.350000	46.00	RMS	34.50	0.00	-35.30	45.20	54	-8.80	-	-	325	226	H
			* 5.356235	46.87	RMS	34.50	0.00	-35.33	46.04	54	-7.96	-	-	325	226	H
			* 5.350000	55.67	Pk	34.50	0.00	-35.30	54.87	-	-	74	-19.13	223	334	V
			* 5.449917	58.60	Pk	34.60	0.00	-35.20	58.00	-	-	74	-16.00	223	334	V
			* 5.350000	44.30	RMS	34.50	0.00	-35.30	43.50	54	-10.50	-	-	223	334	V
			* 5.444294	45.94	RMS	34.60	0.00	-35.20	45.34	54	-8.66	-	-	223	334	V
EHT80 484+242T - RU90	5290	6+16	* 5.350000	63.67	Pk	34.50	0.00	-35.37	62.80	-	-	74	-11.20	340	219	H
			* 5.358592	70.00	Pk	34.50	0.00	-35.35	69.15	-	-	74	-4.85	340	219	H
			* 5.350000	46.39	RMS	34.50	0.00	-35.37	45.52	54	-8.48	-	-	340	219	H
			* 5.359595	48.28	RMS	34.50	0.00	-35.35	47.43	54	-6.57	-	-	340	219	H
			* 5.350000	56.46	Pk	34.50	0.00	-35.37	55.59	-	-	74	-18.41	238	138	V
			* 5.358102	62.51	Pk	34.50	0.00	-35.35	61.66	-	-	74	-12.34	238	138	V
			* 5.350000	44.95	RMS	34.50	0.00	-35.37	44.08	54	-9.92	-	-	238	138	V
			* 5.358918	45.65	RMS	34.50	0.00	-35.35	44.80	54	-9.20	-	-	238	138	V
EHT160 996+484T - RU94	5250 (Straddle)	6+16	* 5.350000	65.13	Pk	34.60	0.00	-39.50	60.23	-	-	74	-13.77	28	224	H
			* 5.374785	74.01	Pk	34.60	0.00	-39.50	69.11	-	-	74	-4.89	28	224	H
			* 5.350000	51.05	RMS	34.60	0.00	-39.50	46.15	54	-7.85	-	-	28	224	H
			* 5.374972	52.94	RMS	34.60	0.00	-39.50	48.04	54	-5.96	-	-	28	224	H
			* 5.350000	58.52	Pk	34.60	0.00	-39.50	53.62	-	-	74	-20.38	221	374	V
			* 5.377445	62.67	Pk	34.60	0.00	-39.46	57.81	-	-	74	-16.19	221	374	V
			* 5.350000	47.96	RMS	34.60	0.00	-39.50	43.06	54	-10.94	-	-	221	374	V
			* 5.379591	48.77	RMS	34.60	0.00	-39.40	43.97	54	-10.03	-	-	221	374	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

WORST-CASE BANDEDGE (LOW CHANNEL)**802.11be EHT20 / 5320 MHz / SISO 1Tx/ SU****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fltr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.350000	45.77	Pk	34.30	0.00	-16.50	63.57	-	-	74	-10.43	322	226	H
2	* 5.350654	49.21	Pk	34.30	0.00	-16.50	67.01	-	-	74	-6.99	322	226	H
3	* 5.350000	33.08	RMS	34.30	0.00	-16.50	50.88	54	-3.12	-	-	322	226	H
4	* 5.350812	33.55	RMS	34.30	0.00	-16.50	51.35	54	-2.65	-	-	322	226	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.16. 802.11n/ac MIMO MODE IN UNII-2A BAND – SPURIOUS EMISSIONS

20MHz

UNII-2A (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cb/ Fitr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11n	5260	6 + 16	2.955898	56.56	PK-U	32.80	-46.63	0.00	42.73	-	-	68.2	-25.47	0	101	H
			2.958262	56.22	PK-U	32.80	-46.63	0.00	42.39	-	-	68.2	-25.81	0	200	V
			8.644957	53.03	PK-U	36.10	-42.60	0.00	46.53	-	-	68.2	-21.67	0	200	V
			8.661633	53.02	PK-U	36.10	-42.58	0.00	46.54	-	-	68.2	-21.66	0	200	H
			16.374278	54.72	PK-U	40.30	-42.00	0.00	53.02	-	-	68.2	-15.18	0	200	H
			16.396643	54.73	PK-U	40.40	-42.17	0.00	52.96	-	-	68.2	-15.24	0	200	V
	5300		2.948752	56.59	PK-U	32.80	-46.64	0.00	42.75	-	-	68.2	-25.45	0	200	V
			2.968978	56.77	PK-U	32.90	-46.61	0.00	43.06	-	-	68.2	-25.14	0	101	H
			6.995628	53.55	PK-U	35.60	-43.98	0.00	45.17	-	-	68.2	-23.03	0	200	V
			7.000402	53.64	PK-U	35.60	-43.96	0.00	45.28	-	-	68.2	-22.92	0	200	H
			16.413651	54.62	PK-U	40.40	-42.30	0.00	52.72	-	-	68.2	-15.48	0	200	H
			16.423818	54.72	PK-U	40.50	-42.37	0.00	52.85	-	-	68.2	-15.35	0	200	V
			2.029241	57.89	PK-U	31.50	-46.59	0.00	42.80	-	-	68.2	-25.4	0	101	H
			2.029370	58.04	PK-U	31.50	-46.59	0.00	42.95	-	-	68.2	-25.25	0	101	V
			6.806088	53.69	PK-U	35.60	-44.10	0.00	45.19	-	-	68.2	-23.01	0	200	V
			6.823829	54.44	PK-U	35.60	-44.10	0.00	45.94	-	-	68.2	-22.26	0	101	H
			13.745566	53.27	PK-U	39.10	-41.52	0.00	50.85	-	-	68.2	-17.35	0	200	V
			13.748854	52.88	PK-U	39.10	-41.51	0.00	50.47	-	-	68.2	-17.73	0	200	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

40MHz

UNII-2A (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11n	5270	6 + 16	* 1.225021	57.12	PK-U	30.40	0.00	-44.96	42.56	-	-	74	-31.44	360	101	H
			* 1.224868	45.93	ADR	30.40	0.00	-44.96	31.37	54	-22.63	-	-	360	101	H
			* 1.225834	58.17	PK-U	30.40	0.00	-44.96	43.61	-	-	74	-30.39	360	200	V
			* 1.224934	46.57	ADR	30.40	0.00	-44.96	32.01	54	-21.99	-	-	360	200	V
			* 11.979540	51.40	PK-U	39.50	0.00	-38.52	52.38	-	-	74	-21.62	360	200	H
			* 11.978403	39.14	ADR	39.60	0.00	-38.52	40.22	54	-13.78	-	-	360	200	H
			* 11.950463	50.73	PK-U	39.60	0.00	-38.55	51.78	-	-	74	-22.22	360	101	V
			* 11.928552	39.17	ADR	39.50	0.00	-38.68	39.99	54	-14.01	-	-	360	101	V
			1.753463	56.92	PK-U	29.50	0.00	-44.81	41.61	-	-	68.2	-26.59	360	198	H
			1.765523	57.37	PK-U	29.80	0.00	-44.77	42.40	-	-	68.2	-25.8	360	200	V
	5310		* 1.267929	45.52	ADR	29.90	0.00	-44.82	30.60	54	-23.4	-	-	360	199	H
			* 1.270209	59.92	PK-U	29.80	0.00	-44.79	44.93	-	-	74	-29.07	193	101	V
			* 1.270355	48.63	ADR	29.80	0.00	-44.79	33.64	54	-20.36	-	-	193	101	V
			* 1.271575	57.04	PK-U	29.80	0.00	-44.80	42.04	-	-	74	-31.96	360	199	H
			* 11.972358	39.09	ADR	39.60	0.00	-38.50	40.19	54	-13.81	-	-	193	101	H
			* 11.986904	51.03	PK-U	39.50	0.00	-38.61	51.92	-	-	74	-22.08	193	101	H
			* 11.992350	50.95	PK-U	39.50	0.00	-38.62	51.83	-	-	74	-22.17	193	101	V
			* 12.013132	39.14	ADR	39.50	0.00	-38.69	39.95	54	-14.05	-	-	193	101	V
			1.766492	65.47	PK-U	29.80	0.00	-44.76	50.51	-	-	68.2	-17.69	193	295	H
			1.769084	62.75	PK-U	29.90	0.00	-44.74	47.91	-	-	68.2	-20.29	193	199	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

80MHz

UNII-2A (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11ac	5290	6 + 16	* 4.391963	46.37	ADR	34.00	0.00	-47.55	32.82	54	-21.18	-	-	0	100	H
			* 7.351090	57.50	PK-U	35.80	0.00	-46.56	46.74	-	-	74	-27.26	0	100	H
			* 7.332388	45.59	ADR	35.70	0.00	-46.62	34.67	54	-19.33	-	-	0	100	H
			* 7.334790	57.73	PK-U	35.70	0.00	-46.64	46.79	-	-	74	-27.21	0	201	V
			* 7.350586	45.84	ADR	35.80	0.00	-46.56	35.08	54	-18.92	-	-	0	201	V
			4.400204	58.46	PK-U	34.10	0.00	-47.60	44.96	-	-	68.2	-23.24	0	201	V
			4.403050	59.92	PK-U	34.10	0.00	-47.55	46.47	-	-	68.2	-21.73	0	100	H
			9.722314	57.78	PK-U	37.20	0.00	-46.44	48.54	-	-	68.2	-19.66	0	200	V
			9.741200	57.78	PK-U	37.20	0.00	-46.25	48.73	-	-	68.2	-19.47	0	100	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.1.17. 802.11be MIMO SU MODE IN UNII-2A BAND – SPURIOUS EMISSIONS

20MHz

UNII-2A (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 SU Mode	5260	6+16	* 12.053308	34.73	ADR	38.7	0.00	-34.70	38.73	54	-15.27	-	-	0	200	H
			* 12.059614	46.13	PK-U	38.7	0.00	-34.70	50.13	-	-	74	-23.87	0	200	H
			* 12.083836	34.56	ADR	38.7	0.00	-34.60	38.66	54	-15.34	-	-	0	101	V
			* 12.091910	46.45	PK-U	38.7	0.00	-34.70	50.45	-	-	74	-23.55	0	101	V
			* 17.903163	32.75	ADR	41.4	0.00	-30.70	43.45	54	-10.55	-	-	0	200	H
			* 17.915224	32.79	ADR	41.4	0.00	-30.60	43.59	54	-10.41	-	-	0	200	V
			* 17.926823	44.86	PK-U	41.4	0.00	-30.80	55.46	-	-	74	-18.54	0	200	V
			* 17.927143	44.38	PK-U	41.4	0.00	-30.80	54.98	-	-	74	-19.02	0	200	H
			* 2.675954	53.71	PK-U	32.3	0.00	-43.50	42.51	-	-	74	-31.49	0	101	V
			* 2.676927	54.00	PK-U	32.3	0.00	-43.50	42.80	-	-	74	-31.2	0	199	H
			* 2.680171	42.41	ADR	32.3	0.00	-43.50	31.21	54	-22.79	-	-	0	101	V
			* 2.680474	42.26	ADR	32.3	0.00	-43.50	31.06	54	-22.94	-	-	0	199	H
	5300		* 10.621307	48.42	PK-U	37.6	0.00	-36.80	49.22	-	-	74	-24.78	0	199	H
			* 10.625382	36.53	ADR	37.6	0.00	-36.80	37.33	54	-16.67	-	-	0	199	H
			* 10.656884	48.93	PK-U	37.7	0.00	-36.80	49.83	-	-	74	-24.17	0	199	V
			* 10.657763	36.70	ADR	37.7	0.00	-36.80	37.60	54	-16.4	-	-	0	199	V
			* 17.701258	44.40	PK-U	41.6	0.00	-31.40	54.60	-	-	74	-19.4	0	199	V
			* 17.729908	32.91	ADR	41.5	0.00	-31.50	42.91	54	-11.09	-	-	0	199	V
			* 17.731946	44.98	PK-U	41.5	0.00	-31.50	54.98	-	-	74	-19.02	0	199	H
			* 17.744678	33.59	ADR	41.6	0.00	-31.50	43.69	54	-10.31	-	-	0	199	H
			* 2.667183	54.28	PK-U	32.3	0.00	-43.40	43.18	-	-	74	-30.82	0	199	H
			* 2.673431	54.03	PK-U	32.3	0.00	-43.50	42.83	-	-	74	-31.17	0	101	V
			* 2.683501	42.28	ADR	32.3	0.00	-43.50	31.08	54	-22.92	-	-	0	199	H
			* 2.687065	42.23	ADR	32.2	0.00	-43.50	30.93	54	-23.07	-	-	0	101	V
	5320		* 10.659899	48.38	PK-U	37.7	0.00	-36.80	49.28	-	-	74	-24.72	0	101	V
			* 10.677893	36.13	ADR	37.7	0.00	-36.70	37.13	54	-16.87	-	-	0	101	V
			* 10.678104	48.12	PK-U	37.7	0.00	-36.70	49.12	-	-	74	-24.88	0	199	H
			* 10.687716	36.37	ADR	37.7	0.00	-36.60	37.47	54	-16.53	-	-	0	199	H
			* 17.905945	44.31	PK-U	41.4	0.00	-30.60	55.11	-	-	74	-18.89	0	199	H
			* 17.910732	32.57	ADR	41.4	0.00	-30.50	43.47	54	-10.53	-	-	0	199	H
			* 17.928476	32.55	ADR	41.4	0.00	-30.80	43.15	54	-10.85	-	-	0	200	V
			* 17.942088	45.05	PK-U	41.4	0.00	-31.30	55.15	-	-	74	-18.85	0	200	V
			* 2.675046	42.60	ADR	32.3	0.00	-43.50	31.40	54	-22.6	-	-	0	199	V
			* 2.675935	53.89	PK-U	32.3	0.00	-43.50	42.69	-	-	74	-31.31	0	199	V
			* 2.678055	42.49	ADR	32.3	0.00	-43.50	31.29	54	-22.71	-	-	0	199	H
			* 2.679192	54.74	PK-U	32.3	0.00	-43.50	43.54	-	-	74	-30.46	0	199	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

40MHz

UNII-2A (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fltr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT40 SU Mode	5270	6+16	2.991720	59.47	PK-U	32.8	0.00	-48.03	44.24	-	-	68.2	-23.96	0	101	H
			2.970828	59.51	PK-U	32.7	0.00	-48.08	44.13	-	-	68.2	-24.07	0	199	V
			9.969338	56.81	PK-U	37.3	0.00	-45.23	48.88	-	-	68.2	-19.32	0	200	H
			16.897661	54.34	PK-U	41.2	0.00	-40.80	54.74	-	-	68.2	-13.46	0	200	H
			9.972532	56.61	PK-U	37.3	0.00	-45.25	48.66	-	-	68.2	-19.54	0	200	V
			16.885087	54.57	PK-U	41.2	0.00	-40.81	54.96	-	-	68.2	-13.24	0	101	V
			2.556332	60.47	PK-U	32.4	0.00	-48.73	44.14	-	-	68.2	-24.06	0	101	H
			2.554183	60.66	PK-U	32.4	0.00	-48.80	44.26	-	-	68.2	-23.94	0	101	V
	5310		10.056309	56.72	PK-U	37.4	0.00	-45.10	49.02	-	-	68.2	-19.18	0	199	H
			17.013658	53.50	PK-U	41.3	0.00	-40.80	54.00	-	-	68.2	-14.2	0	199	H
			10.060663	56.43	PK-U	37.4	0.00	-45.00	48.83	-	-	68.2	-19.37	0	101	V
			17.054252	54.42	PK-U	41.4	0.00	-40.50	55.32	-	-	68.2	-12.88	0	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

80MHz

UNII-2A (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cb/ Filtr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT80 SU Mode	5290	6+16	* 15.851607	44.20	ADR	40.4	0.00	-42.87	41.73	54	-12.27	-	-	0	200	V
			* 15.852356	44.26	ADR	40.4	0.00	-42.82	41.84	54	-12.16	-	-	0	100	H
			* 15.872147	56.48	PK-U	40.4	0.00	-42.69	54.19	-	-	74	-19.81	0	100	H
			* 15.876780	56.46	PK-U	40.4	0.00	-42.71	54.15	-	-	74	-19.85	0	200	V
			* 2.655084	43.34	PK-U	32.4	0.00	-26.02	49.72	-	-	74	-24.28	0	100	H
			* 2.659044	31.53	ADR	32.4	0.00	-26.06	37.87	54	-16.13	-	-	0	100	H
			* 2.664022	43.30	PK-U	32.4	0.00	-26.02	49.68	-	-	74	-24.32	0	201	V
			10.582356	57.02	PK-U	37.6	0.00	-45.16	49.46	-	-	68.2	-18.74	0	201	V
			10.591607	57.70	PK-U	37.6	0.00	-45.18	50.12	-	-	68.2	-18.08	0	100	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

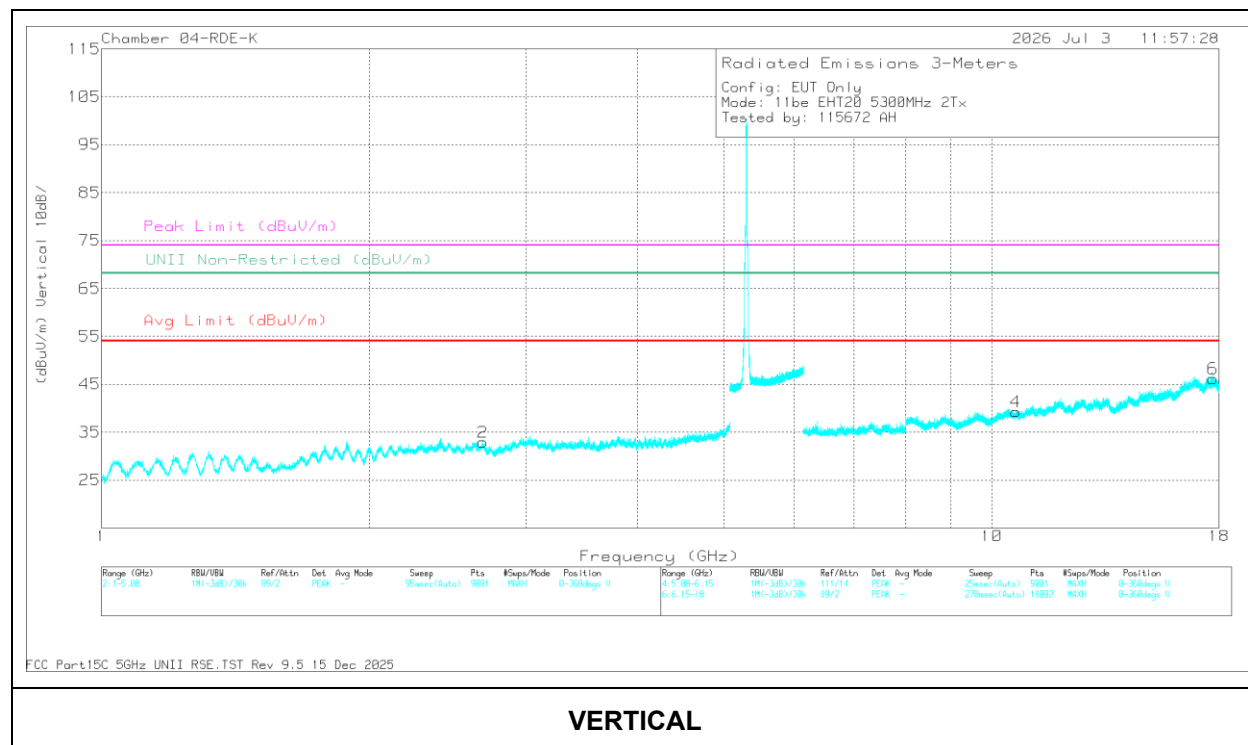
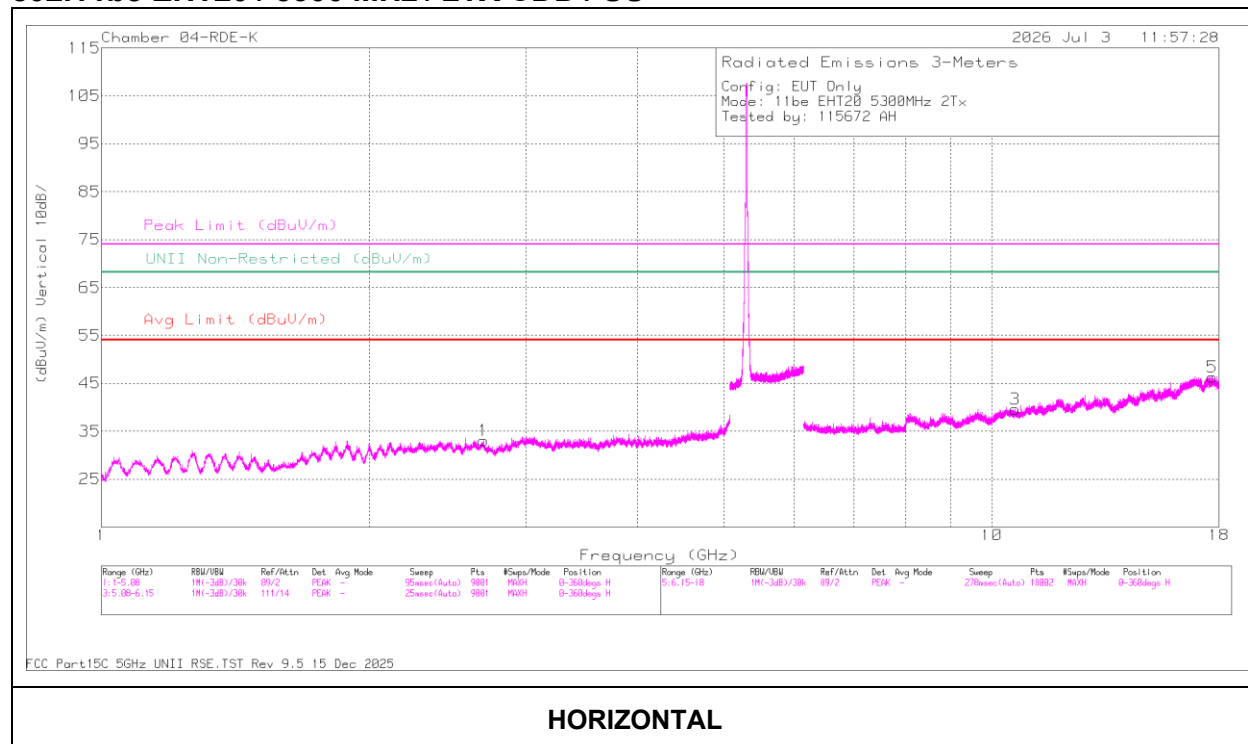
1.1.18. 802.11be MIMO PARTIAL RU MODE IN UNII-2A BAND – SPURIOUS EMISSIONS

UNII-2A (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 52T - RU37	5260	6+16	* 8.129982	52.93	PK-U	36.1	-40.20	0.00	48.83	-	-	74	-25.17	0	101	H
			* 8.128346	39.72	ADR	36.1	-40.20	0.00	35.62	54	-18.38	-	-	0	101	H
			* 15.609520	52.61	PK-U	41.0	-39.20	0.00	54.41	-	-	74	-19.59	0	200	H
			* 15.609551	40.86	ADR	41.0	-39.20	0.00	42.66	54	-11.34	-	-	0	200	H
			* 8.141079	51.90	PK-U	36.1	-40.40	0.00	47.60	-	-	74	-26.4	0	200	V
			* 8.134368	39.72	ADR	36.1	-40.30	0.00	35.52	54	-18.48	-	-	0	200	V
			* 15.444530	53.16	PK-U	41.0	-38.10	0.00	56.06	-	-	74	-17.94	0	101	V
			* 15.434433	41.01	ADR	40.9	-38.50	0.00	43.41	54	-10.59	-	-	0	101	V
			1.944833	56.97	PK-U	31.6	-46.20	0.00	42.37	-	-	68.2	-25.83	0	199	V
			1.946502	57.53	PK-U	31.6	-46.20	0.00	42.93	-	-	68.2	-25.27	0	101	H
			* 15.371048	53.08	PK-U	40.8	-39.90	0.00	53.98	-	-	74	-20.02	0	199	H
			* 15.372408	41.69	ADR	40.8	-39.80	0.00	42.69	54	-11.31	-	-	0	199	H
EHT20 52T - RU38	5300	6+16	* 2.259634	44.35	ADR	31.8	-46.20	0.00	29.95	54	-24.05	-	-	0	101	V
			* 2.260901	56.14	PK-U	31.8	-46.30	0.00	41.64	-	-	74	-32.36	0	101	V
			* 2.261669	56.46	PK-U	31.8	-46.30	0.00	41.96	-	-	74	-32.04	0	101	H
			* 2.263062	44.13	ADR	31.8	-46.30	0.00	29.63	54	-24.37	-	-	0	101	H
			* 15.334471	53.06	PK-U	40.7	-39.90	0.00	53.86	-	-	68.2	-14.34	0	101	V
			8.012845	51.25	PK-U	36.0	-40.60	0.00	46.65	-	-	68.2	-21.55	0	199	V
			8.020624	51.84	PK-U	36.0	-40.50	0.00	47.34	-	-	68.2	-20.86	0	199	H
			* 2.682760	44.81	ADR	32.8	-46.00	0.00	31.61	54	-22.39	-	-	0	101	H
			* 2.685334	56.41	PK-U	32.8	-46.00	0.00	43.21	-	-	74	-30.79	0	101	V
			* 2.683880	44.96	ADR	32.8	-46.00	0.00	31.76	54	-22.24	-	-	0	101	V
EHT20 52T - RU40	5320	6+16	* 10.605792	52.23	PK-U	37.6	-39.40	0.00	50.43	-	-	74	-23.57	0	101	H
			* 10.613201	40.34	ADR	37.6	-39.50	0.00	38.44	54	-15.56	-	-	0	101	H
			* 15.921876	53.01	PK-U	41.0	-38.20	0.00	55.81	-	-	74	-18.19	0	101	H
			* 15.938343	41.23	ADR	41.0	-38.70	0.00	43.53	54	-10.47	-	-	0	101	H
			* 10.663632	52.27	PK-U	37.6	-39.30	0.00	50.57	-	-	74	-23.43	0	101	V
			* 10.655232	40.15	ADR	37.6	-39.20	0.00	38.55	54	-15.45	-	-	0	101	V
			* 15.969398	52.98	PK-U	41.0	-39.10	0.00	54.88	-	-	74	-19.12	0	101	V
			* 15.956500	41.16	ADR	41.0	-39.20	0.00	42.96	54	-11.04	-	-	0	101	V
			2.647600	56.68	PK-U	32.8	-46.30	0.00	43.18	-	-	68.2	-25.02	0	101	H
			2.636157	60.14	PK-U	32.3	0.00	-49.35	43.09	-	-	68.2	-25.11	0	100	H
EHT80 484+242T - RU93	5290	6+16	2.652537	60.76	PK-U	32.4	0.00	-49.43	43.73	-	-	68.2	-24.47	0	201	V
			10.566986	57.08	PK-U	38.1	0.00	-45.50	49.68	-	-	68.2	-18.52	0	200	V
			10.567175	56.68	PK-U	38.1	0.00	-45.49	49.29	-	-	68.2	-18.91	0	100	H
			* 15.430767	44.71	ADR	40.9	0.00	-43.02	42.59	54	-11.41	-	-	0	100	H
			* 15.433904	56.61	PK-U	40.9	0.00	-43.19	54.32	-	-	74	-19.68	0	200	V
			* 15.435340	57.27	PK-U	41.0	0.00	-43.21	55.06	-	-	74	-18.94	0	100	H
			* 15.435442	44.92	ADR	41.0	0.00	-43.21	42.71	54	-11.29	-	-	0	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

WORST-CASE HARMONICS AND SPURIOUS EMISSIONS**802.11be EHT20 / 5300 MHz / 2TX CDD / SU**

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filt/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 10.621307	48.42	PK-U	37.6	0.00	-36.80	49.22	-	-	74	-24.78	0	199	H
* 10.625382	36.53	ADR	37.6	0.00	-36.80	37.33	54	-16.67	-	-	0	199	H
* 10.656884	48.93	PK-U	37.7	0.00	-36.80	49.83	-	-	74	-24.17	0	199	V
* 10.657763	36.70	ADR	37.7	0.00	-36.80	37.60	54	-16.4	-	-	0	199	V
* 17.701258	44.40	PK-U	41.6	0.00	-31.40	54.60	-	-	74	-19.4	0	199	V
* 17.729908	32.91	ADR	41.5	0.00	-31.50	42.91	54	-11.09	-	-	0	199	V
* 17.731946	44.98	PK-U	41.5	0.00	-31.50	54.98	-	-	74	-19.02	0	199	H
* 17.744678	33.59	ADR	41.6	0.00	-31.50	43.69	54	-10.31	-	-	0	199	H
* 2.667183	54.28	PK-U	32.3	0.00	-43.40	43.18	-	-	74	-30.82	0	199	H
* 2.673431	54.03	PK-U	32.3	0.00	-43.50	42.83	-	-	74	-31.17	0	101	V
* 2.683501	42.28	ADR	32.3	0.00	-43.50	31.08	54	-22.92	-	-	0	199	H
* 2.687065	42.23	ADR	32.2	0.00	-43.50	30.93	54	-23.07	-	-	0	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.1.19. 802.11n/ac SISO MODE IN UNII-2C BAND – BANDEDGE**20MHz**

UNII-2C (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fltr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
HT20	5500	6	* 5.460000	52.61	Pk	34.50	0.00	-33.40	53.71	-	-	74	-20.29	181	242	H
			* 5.459063	55.04	Pk	34.50	0.00	-33.40	56.14	-	-	74	-17.86	181	242	H
			5.470000	57.10	Pk	34.50	0.00	-33.40	58.20	-	-	68.2	-10.00	181	242	H
			5.468589	59.33	Pk	34.50	0.00	-33.40	60.43	-	-	68.2	-7.77	181	242	H
			* 5.460000	42.18	RMS	34.50	0.00	-33.40	43.28	54	-10.72	-	-	181	242	H
			* 5.386854	42.77	RMS	34.60	0.00	-33.40	43.97	54	-10.03	-	-	181	242	H
			5.470000	43.07	RMS	34.50	0.00	-33.40	44.17	-	-	-	-	181	242	H
			* 5.386854	42.77	RMS	34.60	0.00	-33.40	43.97	54	-10.03	-	-	181	242	H
			* 5.460000	53.04	Pk	34.50	0.00	-33.40	54.14	-	-	74	-19.86	213	112	V
			* 5.459963	55.09	Pk	34.50	0.00	-33.40	56.19	-	-	74	-17.81	213	112	V
			5.470000	59.81	Pk	34.50	0.00	-33.40	60.91	-	-	68.2	-7.29	213	112	V
			5.469389	62.19	Pk	34.50	0.00	-33.40	63.29	-	-	68.2	-4.91	213	112	V
			* 5.460000	42.20	RMS	34.50	0.00	-33.40	43.30	54	-10.70	-	-	213	112	V
			* 5.363702	43.01	RMS	34.60	0.00	-33.40	44.21	54	-9.79	-	-	213	112	V
			5.470000	44.33	RMS	34.50	0.00	-33.40	45.43	-	-	-	-	213	112	V
			* 5.363702	43.01	RMS	34.60	0.00	-33.40	44.21	54	-9.79	-	-	213	112	V
		16	* 5.460000	54.91	Pk	34.60	0.00	-32.31	57.20	-	-	74	-16.80	149	197	H
			* 5.442599	57.81	Pk	34.60	0.00	-32.33	60.08	-	-	74	-13.92	149	197	H
			5.470000	57.75	Pk	34.60	0.00	-32.27	60.08	-	-	68.2	-8.12	149	197	H
			5.468265	61.26	Pk	34.60	0.00	-32.27	63.59	-	-	68.2	-4.61	149	197	H
			* 5.460000	44.15	RMS	34.60	0.00	-32.31	46.44	54	-7.56	-	-	149	197	H
			* 5.425666	45.44	RMS	34.60	0.00	-32.36	47.68	54	-6.32	-	-	149	197	H
			5.470000	44.69	RMS	34.60	0.00	-32.27	47.02	-	-	-	-	149	197	H
			* 5.425666	45.44	RMS	34.60	0.00	-32.36	47.68	54	-6.32	-	-	149	197	H
			* 5.460000	54.81	Pk	34.60	0.00	-32.31	57.10	-	-	74	-16.90	78	172	V
			* 5.380222	57.67	Pk	34.50	0.00	-32.38	59.79	-	-	74	-14.21	78	172	V
			5.470000	54.16	Pk	34.60	0.00	-32.27	56.49	-	-	68.2	-11.71	78	172	V
			5.468777	56.42	Pk	34.60	0.00	-32.26	58.76	-	-	68.2	-9.44	78	172	V
			* 5.460000	43.14	RMS	34.60	0.00	-32.31	45.43	54	-8.57	-	-	78	172	V
			* 5.368955	45.15	RMS	34.50	0.00	-32.35	47.30	54	-6.70	-	-	78	172	V
			5.470000	44.11	RMS	34.60	0.00	-32.27	46.44	-	-	-	-	78	172	V
			* 5.368955	45.15	RMS	34.50	0.00	-32.35	47.30	54	-6.70	-	-	78	172	V
	5700	6	5.725000	56.22	Pk	34.70	0.00	-33.30	57.62	-	-	68.2	-10.58	278	112	H
			5.726058	56.36	Pk	34.70	0.00	-33.30	57.76	-	-	68.2	-10.44	278	112	H
			5.725000	60.14	Pk	34.70	0.00	-33.30	61.54	-	-	68.2	-6.66	205	124	V
			5.725534	61.57	Pk	34.70	0.00	-33.30	62.97	-	-	68.2	-5.23	205	124	V
		16	5.725000	62.49	Pk	34.50	0.00	-34.10	62.89	-	-	68.2	-5.31	312	235	H
			5.725007	62.89	Pk	34.50	0.00	-34.10	63.29	-	-	68.2	-4.91	312	235	H
			5.725000	55.00	Pk	34.50	0.00	-34.10	55.40	-	-	68.2	-12.80	275	207	V
			5.807156	57.12	Pk	34.80	0.00	-33.89	58.03	-	-	68.2	-10.17	275	207	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

40MHz

UNII-2C (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filtr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
HT40	5510	6	* 5.460000	53.10	Pk	34.90	0.00	-30.60	57.40	-	-	74.0	-16.6	15	341	H
			* 5.458563	54.99	Pk	34.90	0.00	-30.60	59.29	-	-	74	-14.71	15	341	H
			5.470000	56.43	Pk	34.90	0.00	-30.60	60.73	-	-	68.2	-7.47	15	341	H
			5.468914	59.03	Pk	34.90	0.00	-30.60	63.33	-	-	68.2	-4.87	15	341	H
			* 5.460000	40.46	RMS	34.90	0.00	-30.60	44.76	54	-9.24	-	-	15	341	H
			* 5.459013	41.21	RMS	34.90	0.00	-30.60	45.51	54	-8.49	-	-	15	341	H
			5.470000	40.90	RMS	34.90	0.00	-30.60	45.20	-	-	-	-	15	341	H
			* 5.459013	41.21	RMS	34.90	0.00	-30.60	45.51	54	-8.49	-	-	15	341	H
			* 5.460000	50.36	Pk	34.90	0.00	-30.60	54.66	-	-	74.0	-19.34	35	278	V
			* 5.393430	53.07	Pk	35.00	0.00	-30.70	57.37	-	-	74	-16.63	35	278	V
			5.470000	52.99	Pk	34.90	0.00	-30.60	57.29	-	-	68.2	-10.91	35	278	V
			5.469389	54.19	Pk	34.90	0.00	-30.60	58.49	-	-	68.2	-9.71	35	278	V
			* 5.460000	39.55	RMS	34.90	0.00	-30.60	43.85	54	-10.15	-	-	35	278	V
			* 5.386879	40.81	RMS	35.00	0.00	-30.70	45.11	54	-8.89	-	-	35	278	V
			5.470000	39.99	RMS	34.90	0.00	-30.60	44.29	-	-	-	-	35	278	V
			* 5.386879	40.81	RMS	35.00	0.00	-30.70	45.11	54	-8.89	-	-	35	278	V
		16	* 5.460000	39.03	Pk	34.40	0.00	-16.30	57.13	-	-	74	-16.87	337	190	H
			* 5.459638	40.60	Pk	34.40	0.00	-16.30	58.70	-	-	74	-15.30	337	190	H
			5.470000	43.17	Pk	34.30	0.00	-16.30	61.17	-	-	68.2	-7.03	337	190	H
			5.468364	44.65	Pk	34.30	0.00	-16.20	62.75	-	-	68.2	-5.45	337	190	H
			* 5.460000	27.81	RMS	34.40	0.00	-16.30	45.91	54	-8.09	-	-	337	190	H
			* 5.374053	28.73	RMS	34.30	0.00	-16.40	46.63	54	-7.37	-	-	337	190	H
			5.470000	28.33	RMS	34.30	0.00	-16.30	46.33	-	-	-	-	337	190	H
			* 5.374053	28.73	RMS	34.30	0.00	-16.40	46.63	54	-7.37	-	-	337	190	H
			* 5.460000	37.59	Pk	34.40	0.00	-16.30	55.69	-	-	74	-18.31	267	211	V
			* 5.416658	41.02	Pk	34.40	0.00	-16.20	59.22	-	-	74	-14.78	267	211	V
			5.470000	38.41	Pk	34.30	0.00	-16.30	56.41	-	-	68.2	-11.79	267	211	V
			5.460663	39.92	Pk	34.40	0.00	-16.30	58.02	-	-	68.2	-10.18	267	211	V
			* 5.460000	27.45	RMS	34.40	0.00	-16.30	45.55	54	-8.45	-	-	267	211	V
			* 5.378053	29.03	RMS	34.30	0.00	-16.40	46.93	54	-7.07	-	-	267	211	V
			5.470000	27.12	RMS	34.30	0.00	-16.30	45.12	-	-	-	-	267	211	V
			* 5.378053	29.03	RMS	34.30	0.00	-16.40	46.93	54	-7.07	-	-	267	211	V
	5670	6	5.725000	57.80	Pk	34.60	0.00	-30.20	62.20	-	-	68.2	-6	323	344	H
			5.726445	58.67	Pk	34.50	0.00	-30.20	62.97	-	-	68.2	-5.23	323	344	H
			5.725000	53.54	Pk	34.60	0.00	-30.20	57.94	-	-	68.2	-10.26	298	309	V
			5.725128	55.32	Pk	34.60	0.00	-30.20	59.72	-	-	68.2	-8.48	298	309	V
		16	5.725000	43.63	Pk	34.50	0.00	-17.00	61.13	-	-	68.2	-7.07	333	203	H
			5.727647	46.20	Pk	34.50	0.00	-17.00	63.70	-	-	68.2	-4.50	333	203	H
			5.725000	38.83	Pk	34.50	0.00	-17.00	56.33	-	-	68.2	-11.87	274	192	V
			5.814301	40.56	Pk	34.80	0.00	-16.50	58.86	-	-	68.2	-9.34	274	192	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

80MHz

UNII-2C (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filtr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
VHT80	5530	6	* 5.460000	59.45	Pk	34.30	0.00	-38.10	55.65	-	-	74	-18.35	139	332	H
			* 5.457510	62.60	Pk	34.30	0.00	-38.10	58.80	-	-	74	-15.20	139	332	H
			* 5.460000	48.46	RMS	34.30	0.00	-38.10	44.66	54	-9.34	-	-	139	332	H
			* 5.449621	49.01	RMS	34.30	0.00	-38.10	45.21	54	-8.79	-	-	139	332	H
			* 5.449621	49.01	RMS	34.30	0.00	-38.10	45.21	54	-8.79	-	-	139	332	H
			5.468621	66.53	Pk	34.30	0.00	-38.10	62.73	-	-	68.2	-5.47	139	332	H
			5.470000	65.26	Pk	34.30	0.00	-38.10	61.46	-	-	68.2	-6.74	139	332	H
			5.470000	49.22	RMS	34.30	0.00	-38.10	45.42	-	-	-	-	139	332	H
			* 5.460000	57.92	Pk	34.30	0.00	-38.10	54.12	-	-	74	-19.88	189	191	V
			* 5.406822	60.51	Pk	34.30	0.00	-38.20	56.61	-	-	74	-17.39	189	191	V
			* 5.460000	47.41	RMS	34.30	0.00	-38.10	43.61	54	-10.39	-	-	189	191	V
			* 5.459799	48.28	RMS	34.30	0.00	-38.10	44.48	54	-9.52	-	-	189	191	V
			* 5.459799	48.28	RMS	34.30	0.00	-38.10	44.48	54	-9.52	-	-	189	191	V
			5.468221	62.98	Pk	34.30	0.00	-38.10	59.18	-	-	68.2	-9.02	189	191	V
			5.470000	62.58	Pk	34.30	0.00	-38.10	58.78	-	-	68.2	-9.42	189	191	V
			5.470000	47.55	RMS	34.30	0.00	-38.10	43.75	-	-	-	-	189	191	V
		16	* 5.460000	55.72	Pk	34.60	0.00	-32.31	58.01	-	-	74	-15.99	336	236	H
			* 5.456554	57.58	Pk	34.60	0.00	-32.30	59.88	-	-	74	-14.12	336	236	H
			5.470000	56.83	Pk	34.60	0.00	-32.27	59.16	-	-	68.2	-9.04	336	236	H
			5.468043	60.72	Pk	34.60	0.00	-32.27	63.05	-	-	68.2	-5.15	336	236	H
			* 5.460000	44.70	RMS	34.60	0.00	-32.31	46.99	54	-7.01	-	-	336	236	H
			* 5.459554	45.72	RMS	34.60	0.00	-32.31	48.01	54	-5.99	-	-	336	236	H
			5.470000	45.08	RMS	34.60	0.00	-32.27	47.41	-	-	-	-	336	236	H
			* 5.459554	45.72	RMS	34.60	0.00	-32.31	48.01	54	-5.99	-	-	336	236	H
			* 5.460000	55.09	Pk	34.60	0.00	-32.31	57.38	-	-	74	-16.62	184	305	V
			* 5.439799	57.85	Pk	34.60	0.00	-32.34	60.11	-	-	74	-13.89	184	305	V
			5.470000	54.26	Pk	34.60	0.00	-32.27	56.59	-	-	68.2	-11.61	184	305	V
			5.462066	56.42	Pk	34.60	0.00	-32.32	58.70	-	-	68.2	-9.50	184	305	V
			* 5.460000	44.22	RMS	34.60	0.00	-32.31	46.51	54	-7.49	-	-	184	305	V
			* 5.452888	45.19	RMS	34.60	0.00	-32.31	47.48	54	-6.52	-	-	184	305	V
			5.470000	43.40	RMS	34.60	0.00	-32.27	45.73	-	-	-	-	184	305	V
			* 5.452888	45.19	RMS	34.60	0.00	-32.31	47.48	54	-6.52	-	-	184	305	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

160MHz

UNII-2C (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Ftr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
VHT160	5570 (Lower)	6	* 5.460000	52.84	Pk	34.90	0.00	-30.60	57.14	-	-	74	-16.86	312	254	H
			* 5.439236	59.68	Pk	35.00	0.00	-30.60	64.08	-	-	74	-9.92	312	254	H
			5.470000	52.71	Pk	34.90	0.00	-30.60	57.01	-	-	68.2	-11.19	312	254	H
			5.467514	56.51	Pk	34.90	0.00	-30.60	60.81	-	-	68.2	-7.39	312	254	H
			* 5.460000	40.32	RMS	34.90	0.10	-30.60	44.72	54	-9.28	-	-	312	254	H
			* 5.438536	41.34	RMS	35.00	0.10	-30.60	45.84	54	-8.16	-	-	312	254	H
			5.470000	40.47	RMS	34.90	0.10	-30.60	44.87	-	-	-	-	312	254	H
			* 5.438536	41.34	RMS	35.00	0.10	-30.60	45.84	54	-8.16	-	-	312	254	H
			* 5.460000	55.58	Pk	34.90	0.00	-30.60	59.88	-	-	74	-14.12	341	167	V
			* 5.442111	62.69	Pk	34.90	0.00	-30.60	66.99	-	-	74	-7.01	341	167	V
			5.470000	56.44	Pk	34.90	0.00	-30.60	60.74	-	-	68.2	-7.46	341	167	V
			5.461963	58.89	Pk	34.90	0.00	-30.60	63.19	-	-	68.2	-5.01	341	167	V
			* 5.460000	41.51	RMS	34.90	0.10	-30.60	45.91	54	-8.09	-	-	341	167	V
			* 5.443861	43.31	RMS	34.90	0.10	-30.70	47.61	54	-6.39	-	-	341	167	V
			5.470000	42.07	RMS	34.90	0.10	-30.60	46.47	-	-	-	-	341	167	V
			* 5.443861	43.31	RMS	34.90	0.10	-30.70	47.61	54	-6.39	-	-	341	167	V
		16	* 5.460000	61.32	Pk	34.60	0.00	-33.90	62.02	-	-	74	-11.98	44	108	H
			* 5.440211	67.12	Pk	34.50	0.00	-34.00	67.62	-	-	74	-6.38	44	108	H
			5.470000	59.47	Pk	34.60	0.00	-33.90	60.17	-	-	68.2	-8.03	44	108	H
			5.461338	62.50	Pk	34.60	0.00	-33.90	63.20	-	-	68.2	-5.00	44	108	H
			* 5.460000	38.13	RMS	34.60	0.10	-33.90	38.93	54	-15.07	-	-	44	108	H
			* 5.441486	45.66	RMS	34.50	0.10	-34.00	46.26	54	-7.74	-	-	44	108	H
			5.470000	39.73	RMS	34.60	0.10	-33.90	40.53	-	-	-	-	44	108	H
			* 5.441486	45.66	RMS	34.50	0.10	-34.00	46.26	54	-7.74	-	-	44	108	H
			* 5.460000	48.00	Pk	34.60	0.00	-33.90	48.70	-	-	74	-25.30	349	108	V
			* 5.440211	54.77	Pk	34.50	0.00	-34.00	55.27	-	-	74	-18.73	349	108	V
			5.470000	47.48	Pk	34.60	0.00	-33.90	48.18	-	-	68.2	-20.02	349	108	V
			5.461588	51.07	Pk	34.60	0.00	-33.90	51.77	-	-	68.2	-16.43	349	108	V
			* 5.460000	36.70	RMS	34.60	0.10	-33.90	37.50	54	-16.50	-	-	349	108	V
			* 5.438536	37.62	RMS	34.50	0.10	-34.00	38.22	54	-15.78	-	-	349	108	V
			5.470000	36.14	RMS	34.60	0.10	-33.90	36.94	-	-	-	-	349	108	V
			* 5.438536	37.62	RMS	34.50	0.10	-34.00	38.22	54	-15.78	-	-	349	108	V
VHT160	5570 (Upper)	6	5.725000	51.76	Pk	34.60	0.00	-30.20	56.16	-	-	68.2	-12.04	311	171	H
			5.725091	52.86	Pk	34.60	0.00	-30.20	57.26	-	-	68.2	-10.94	311	171	H
			5.725000	58.75	Pk	34.60	0.00	-30.20	63.15	-	-	68.2	-5.05	342	157	V
			5.725378	58.56	Pk	34.60	0.00	-30.20	62.96	-	-	68.2	-5.24	342	157	V
		16	5.725000	45.37	Pk	34.50	0.00	-17.00	62.87	-	-	68.2	-5.33	334	198	H
			5.726749	45.66	Pk	34.50	0.00	-17.00	63.16	-	-	68.2	-5.04	334	198	H
			5.250000	37.84	Pk	34.50	0.00	-17.00	55.34	-	-	68.2	-12.86	261	187	V
			5.767140	40.88	Pk	34.60	0.00	-16.80	58.68	-	-	68.2	-9.52	261	187	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.20. 802.11n/ac MIMO MODE IN UNII-2C BAND – BANDEDGE**20MHz**

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #		Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
HT20	5500	6+16		* 5.460000	51.89	Pk	34.50	0.00	-33.40	52.99	-	-	74	-21.01	178	393	H
				* 5.431710	54.47	Pk	34.50	0.00	-33.30	55.67	-	-	74	-18.33	178	393	H
				5.470000	53.92	Pk	34.50	0.00	-33.40	55.02	-	-	68.2	-13.18	178	393	H
				5.463114	54.65	Pk	34.50	0.00	-33.40	55.75	-	-	68.2	-12.45	178	393	H
				* 5.460000	41.18	RMS	34.50	0.00	-33.40	42.28	54	-11.72	-	-	178	393	H
				* 5.387029	42.50	RMS	34.60	0.00	-33.40	43.70	54	-10.30	-	-	178	393	H
				5.470000	42.19	RMS	34.50	0.00	-33.40	43.29	-	-	-	-	178	393	H
				* 5.387029	42.50	RMS	34.60	0.00	-33.40	43.70	54	-10.30	-	-	178	393	H
				* 5.460000	53.27	Pk	34.50	0.00	-33.40	54.37	-	-	74	-19.63	224	171	V
				* 5.458763	55.13	Pk	34.50	0.00	-33.40	56.23	-	-	74	-17.77	224	171	V
				5.470000	58.10	Pk	34.50	0.00	-33.40	59.20	-	-	68.2	-9.00	224	171	V
				5.469639	62.00	Pk	34.50	0.00	-33.40	63.10	-	-	68.2	-5.10	224	171	V
				* 5.460000	42.26	RMS	34.50	0.00	-33.40	43.36	54	-10.64	-	-	224	171	V
				* 5.455738	43.12	RMS	34.50	0.00	-33.40	44.22	54	-9.78	-	-	224	171	V
				5.470000	43.65	RMS	34.50	0.00	-33.40	44.75	-	-	-	-	224	171	V
				* 5.455738	43.12	RMS	34.50	0.00	-33.40	44.22	54	-9.78	-	-	224	171	V
	5700			5.725000	52.05	Pk	34.70	0.00	-33.30	53.45	-	-	68.2	-14.75	32	352	H
				5.729352	54.69	Pk	34.70	0.00	-33.30	56.09	-	-	68.2	-12.11	32	352	H
				5.725000	58.28	Pk	34.70	0.00	-33.30	59.68	-	-	68.2	-8.52	245	371	V
				5.726445	62.06	Pk	34.70	0.00	-33.30	63.46	-	-	68.2	-4.74	245	371	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

40MHz

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
HT40	5510	6+16	* 5.460000	53.89	Pk	34.50	0.00	-34.10	54.09	-	-	74	-19.91	191	392	H
			* 5.374753	54.98	Pk	34.50	0.00	-34.00	55.48	-	-	74	-18.52	191	392	H
			5.470000	53.47	Pk	34.50	0.00	-34.10	53.87	-	-	68.2	-14.33	191	392	H
			5.461088	54.77	Pk	34.50	0.00	-34.10	55.17	-	-	68.2	-13.03	191	392	H
			* 5.460000	41.87	RMS	34.50	0.00	-34.10	42.27	54	-11.73	-	-	191	392	H
			* 5.362426	42.76	RMS	34.60	0.00	-34.10	43.26	54	-10.74	-	-	191	392	H
			5.470000	42.55	RMS	34.50	0.00	-34.10	42.95	-	-	-	-	191	392	H
			* 5.362426	42.76	RMS	34.60	0.00	-34.10	43.26	54	-10.74	-	-	191	392	H
			* 5.460000	55.90	Pk	34.50	0.00	-34.10	56.30	-	-	74	-17.70	215	193	V
			* 5.459338	58.78	Pk	34.50	0.00	-34.10	59.18	-	-	74	-14.82	215	193	V
			5.470000	61.16	Pk	34.50	0.00	-34.10	61.56	-	-	68.2	-6.64	215	193	V
			5.469989	63.02	Pk	34.50	0.00	-34.10	63.42	-	-	68.2	-4.78	215	193	V
			* 5.460000	42.73	RMS	34.50	0.00	-34.10	43.13	54	-10.87	-	-	215	193	V
			* 5.459763	43.46	RMS	34.50	0.00	-34.10	43.86	54	-10.14	-	-	215	193	V
			5.470000	43.97	RMS	34.50	0.00	-34.10	44.37	-	-	-	-	215	193	V
			* 5.459763	43.46	RMS	34.50	0.00	-34.10	43.86	54	-10.14	-	-	215	193	V
	5670	6+16	5.725000	55.72	Pk	34.70	0.00	-33.30	57.12	-	-	68.2	-11.08	269	133	H
			5.725302	57.88	Pk	34.70	0.00	-33.30	59.28	-	-	68.2	-8.92	269	133	H
			5.725000	59.05	Pk	34.70	0.00	-33.30	60.45	-	-	68.2	-7.75	250	115	V
			5.727898	61.58	Pk	34.70	0.00	-33.30	62.98	-	-	68.2	-5.22	250	115	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

80MHz

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
VHT80	5530	6+16	* 5.460000	40.43	Pk	34.40	0.00	-16.30	58.53	-	-	74	-15.47	328	187	H
			* 5.458263	42.50	Pk	34.30	0.00	-16.30	60.50	-	-	74	-13.50	328	187	H
			5.470000	43.75	Pk	34.30	0.00	-16.30	61.75	-	-	68.2	-6.45	328	187	H
			5.467539	45.00	Pk	34.30	0.00	-16.20	63.10	-	-	68.2	-5.10	328	187	H
			* 5.460000	27.45	RMS	34.40	0.00	-16.30	45.55	54	-8.45	-	-	328	187	H
			* 5.404132	28.59	RMS	34.40	0.00	-16.40	46.59	54	-7.41	-	-	328	187	H
			5.470000	28.07	RMS	34.30	0.00	-16.30	46.07	-	-	-	-	328	187	H
			* 5.404132	28.59	RMS	34.40	0.00	-16.40	46.59	54	-7.41	-	-	328	187	H
			* 5.460000	38.45	Pk	34.40	0.00	-16.30	56.55	-	-	74	-17.45	267	190	V
			* 5.384979	40.10	Pk	34.40	0.00	-16.30	58.20	-	-	74	-15.80	267	190	V
			5.470000	37.57	Pk	34.30	0.00	-16.30	55.57	-	-	68.2	-12.63	267	190	V
			5.466239	39.52	Pk	34.40	0.00	-16.20	57.72	-	-	68.2	-10.48	267	190	V
			* 5.460000	26.74	RMS	34.40	0.00	-16.30	44.84	54	-9.16	-	-	267	190	V
			* 5.413683	28.04	RMS	34.40	0.00	-16.20	46.24	54	-7.76	-	-	267	190	V
			5.470000	26.49	RMS	34.30	0.00	-16.30	44.49	-	-	-	-	267	190	V
			* 5.413683	28.04	RMS	34.40	0.00	-16.20	46.24	54	-7.76	-	-	267	190	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

160MHz

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
VHT160	5570 (Lower)	6+16	* 5.460000	56.79	Pk	34.60	0.00	-33.90	57.49	-	-	74	-16.51	222	285	H
			* 5.442686	65.85	Pk	34.60	0.00	-34.00	66.45	-	-	74	-7.55	222	285	H
			5.470000	54.48	Pk	34.60	0.00	-33.90	55.18	-	-	68.2	-13.02	222	285	H
			5.463064	62.21	Pk	34.60	0.00	-33.90	62.91	-	-	68.2	-5.29	222	285	H
			* 5.460000	40.25	RMS	34.60	0.10	-33.90	41.05	54	-12.95	-	-	222	285	H
			* 5.437711	45.42	RMS	34.50	0.10	-34.00	46.02	54	-7.98	-	-	222	285	H
			5.470000	39.92	RMS	34.60	0.10	-33.90	40.72	-	-	-	-	222	285	H
			* 5.437711	45.42	RMS	34.50	0.10	-34.00	46.02	54	-7.98	-	-	222	285	H
			* 5.460000	51.17	Pk	34.60	0.00	-33.90	51.87	-	-	74	-22.13	72	392	V
			* 5.443161	57.59	Pk	34.60	0.00	-34.00	58.19	-	-	74	-15.81	72	392	V
			5.470000	50.91	Pk	34.60	0.00	-33.90	51.61	-	-	68.2	-16.59	72	392	V
			5.468339	55.71	Pk	34.60	0.00	-33.90	56.41	-	-	68.2	-11.79	72	392	V
			* 5.460000	40.11	RMS	34.60	0.10	-33.90	40.91	54	-13.09	-	-	72	392	V
			* 5.453537	41.24	RMS	34.60	0.10	-34.00	41.94	54	-12.06	-	-	72	392	V
			5.470000	40.23	RMS	34.60	0.10	-33.90	41.03	-	-	-	-	72	392	V
			* 5.453537	41.24	RMS	34.60	0.10	-34.00	41.94	54	-12.06	-	-	72	392	V
VHT160	5570 (Upper)	6+16	5.725000	58.39	Pk	34.80	0.00	-33.30	59.89	-	-	68.2	-8.31	1	110	H
			5.727610	61.60	Pk	34.80	0.00	-33.30	63.10	-	-	68.2	-5.10	1	110	H
			5.725000	52.86	Pk	34.80	0.00	-33.30	54.36	-	-	68.2	-13.84	134	123	V
			5.728502	54.26	Pk	34.80	0.00	-33.30	55.76	-	-	68.2	-12.44	134	123	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.21. 802.11be SISO SU MODE IN UNII-2C BAND – BANDEDGE**20MHz**

UNII-2C (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fltr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 SU Mode	5500	6	* 5.460000	38.00	Pk	34.40	0.00	-16.30	56.10	-	-	74	-17.90	324	208	H
			* 5.452762	40.55	Pk	34.30	0.00	-16.20	58.65	-	-	74	-15.35	324	208	H
			5.470000	41.31	Pk	34.30	0.00	-16.30	59.31	-	-	68.2	-8.89	324	208	H
			5.468414	45.27	Pk	34.30	0.00	-16.20	63.37	-	-	68.2	-4.83	324	208	H
			* 5.460000	27.21	RMS	34.40	0.00	-16.30	45.31	54	-8.69	-	-	324	208	H
			* 5.400981	28.26	RMS	34.40	0.00	-16.20	46.46	54	-7.54	-	-	324	208	H
			5.470000	28.39	RMS	34.30	0.00	-16.30	46.39	-	-	-	-	324	208	H
			* 5.400981	28.26	RMS	34.40	0.00	-16.20	46.46	54	-7.54	-	-	324	208	H
			* 5.460000	37.64	Pk	34.40	0.00	-16.30	55.74	-	-	74	-18.26	293	133	V
			* 5.445411	40.34	Pk	34.40	0.00	-16.30	58.44	-	-	74	-15.56	293	133	V
			5.470000	38.56	Pk	34.30	0.00	-16.30	56.56	-	-	68.2	-11.64	293	133	V
			5.462839	40.65	Pk	34.40	0.00	-16.20	58.85	-	-	68.2	-9.35	293	133	V
			* 5.460000	26.68	RMS	34.40	0.00	-16.30	44.78	54	-9.22	-	-	293	133	V
			* 5.414933	28.51	RMS	34.40	0.00	-16.20	46.71	54	-7.29	-	-	293	133	V
			5.470000	27.48	RMS	34.30	0.00	-16.30	45.48	-	-	-	-	293	133	V
			* 5.414933	28.51	RMS	34.40	0.00	-16.20	46.71	54	-7.29	-	-	293	133	V
		16	* 5.460000	56.99	Pk	35.00	0.00	-38.30	53.69	-	-	74	-20.31	261	104	H
			* 5.397977	60.51	Pk	35.00	0.00	-38.50	57.01	-	-	74	-16.99	261	104	H
			5.470000	61.79	Pk	35.00	0.00	-38.40	58.39	-	-	68.2	-9.81	261	104	H
			5.469554	66.44	Pk	35.00	0.00	-38.40	63.04	-	-	68.2	-5.16	261	104	H
			* 5.460000	47.03	RMS	35.00	0.00	-38.30	43.73	54	-10.27	-	-	261	104	H
			* 5.457643	48.27	RMS	35.00	0.00	-38.30	44.97	54	-9.03	-	-	261	104	H
			5.470000	48.26	RMS	35.00	0.00	-38.40	44.86	-	-	-	-	261	104	H
			* 5.457643	48.27	RMS	35.00	0.00	-38.30	44.97	54	-9.03	-	-	261	104	H
			* 5.460000	57.50	Pk	35.00	0.00	-38.30	54.20	-	-	74	-19.80	276	195	V
			* 5.400844	59.72	Pk	35.00	0.00	-38.40	56.32	-	-	74	-17.68	276	195	V
			5.470000	57.42	Pk	35.00	0.00	-38.40	54.02	-	-	68.2	-14.18	276	195	V
			5.469510	60.14	Pk	35.00	0.00	-38.40	56.74	-	-	68.2	-11.46	276	195	V
			* 5.460000	46.51	RMS	35.00	0.00	-38.30	43.21	54	-10.79	-	-	276	195	V
			* 5.449332	47.54	RMS	35.00	0.00	-38.30	44.24	54	-9.76	-	-	276	195	V
			5.470000	45.88	RMS	35.00	0.00	-38.40	42.48	-	-	-	-	276	195	V
			* 5.449332	47.54	RMS	35.00	0.00	-38.30	44.24	54	-9.76	-	-	276	195	V
	5700	6	5.725000	45.72	Pk	34.50	0.00	-17.00	63.22	-	-	68.2	-4.98	87	188	H
			5.725314	45.73	Pk	34.50	0.00	-17.10	63.13	-	-	68.2	-5.07	87	188	H
			5.725000	39.58	Pk	34.50	0.00	-17.00	57.08	-	-	68.2	-11.12	293	150	V
			5.728845	41.54	Pk	34.50	0.00	-17.00	59.04	-	-	68.2	-9.16	293	150	V
		16	5.725000	63.69	Pk	35.10	0.00	-37.50	61.29	-	-	68.2	-6.91	263	231	H
			5.725265	65.59	Pk	35.10	0.00	-37.53	63.16	-	-	68.2	-5.04	263	231	H
			5.725000	56.52	Pk	35.10	0.00	-37.50	54.12	-	-	68.2	-14.08	250	181	V
			5.764874	59.79	Pk	35.20	0.00	-37.60	57.39	-	-	68.2	-10.81	250	181	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

40MHz

UNII-2C (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Ftr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT40 SU Mode	5510	6	* 5.460000	60.43	Pk	35.20	0.00	-37.50	58.13	-	-	74	-15.87	323	293	H
			* 5.458732	60.57	Pk	35.20	0.00	-37.50	58.27	-	-	74	-15.73	323	293	H
			5.470000	62.59	Pk	35.20	0.00	-37.60	60.19	-	-	68.2	-8.01	323	293	H
			5.468821	65.35	Pk	35.20	0.00	-37.50	63.05	-	-	68.2	-5.15	323	293	H
			* 5.460000	46.75	RMS	35.20	0.00	-37.50	44.45	54	-9.55	-	-	323	293	H
			* 5.457977	47.60	RMS	35.20	0.00	-37.50	45.30	54	-8.70	-	-	323	293	H
			5.470000	47.12	RMS	35.20	0.00	-37.60	44.72	-	-	-	-	323	293	H
			* 5.457977	47.60	RMS	35.20	0.00	-37.50	45.30	54	-8.70	-	-	323	293	H
			* 5.460000	57.75	Pk	35.20	0.00	-37.50	55.45	-	-	74	-18.55	232	395	V
			* 5.415244	59.74	Pk	35.00	0.00	-37.60	57.14	-	-	74	-16.86	232	395	V
			5.470000	56.64	Pk	35.20	0.00	-37.60	54.24	-	-	68.2	-13.96	232	395	V
			5.467643	58.68	Pk	35.20	0.00	-37.54	56.34	-	-	68.2	-11.86	232	395	V
			* 5.460000	47.04	RMS	35.20	0.00	-37.50	44.74	54	-9.26	-	-	232	395	V
			* 5.400599	47.71	RMS	35.00	0.00	-37.46	45.25	54	-8.75	-	-	232	395	V
			5.470000	47.01	RMS	35.20	0.00	-37.60	44.61	-	-	-	-	232	395	V
			* 5.400599	47.71	RMS	35.00	0.00	-37.46	45.25	54	-8.75	-	-	232	395	V
		16	* 5.460000	59.42	Pk	34.60	0.00	-39.40	54.62	-	-	74	-19.38	324	102	H
			* 5.458288	60.50	Pk	34.60	0.00	-39.40	55.70	-	-	74	-18.30	324	102	H
			5.470000	65.06	Pk	34.60	0.00	-39.30	60.36	-	-	68.2	-7.84	324	102	H
			5.469888	68.29	Pk	34.60	0.00	-39.30	63.59	-	-	68.2	-4.61	324	102	H
			* 5.460000	46.76	RMS	34.60	0.00	-39.40	41.96	54	-12.04	-	-	324	102	H
			* 5.448066	47.84	RMS	34.60	0.00	-39.40	43.04	54	-10.96	-	-	324	102	H
			5.470000	48.23	RMS	34.60	0.00	-39.30	43.53	-	-	-	-	324	102	H
			* 5.448066	47.84	RMS	34.60	0.00	-39.40	43.04	54	-10.96	-	-	324	102	H
			* 5.460000	57.64	Pk	34.60	0.00	-39.40	52.84	-	-	74	-21.16	254	178	V
			* 5.394622	59.66	Pk	34.60	0.00	-39.40	54.86	-	-	74	-19.14	254	178	V
			5.470000	57.54	Pk	34.60	0.00	-39.30	52.84	-	-	68.2	-15.36	254	178	V
			5.461377	59.46	Pk	34.60	0.00	-39.26	54.80	-	-	68.2	-13.40	254	178	V
			* 5.460000	46.44	RMS	34.60	0.00	-39.40	41.64	54	-12.36	-	-	254	178	V
			* 5.367089	47.53	RMS	34.60	0.00	-39.40	42.73	54	-11.27	-	-	254	178	V
			5.470000	46.41	RMS	34.60	0.00	-39.30	41.71	-	-	-	-	254	178	V
			* 5.367089	47.53	RMS	34.60	0.00	-39.40	42.73	54	-11.27	-	-	254	178	V
	5670	6	5.725000	62.91	Pk	35.00	0.00	-36.70	61.21	-	-	68.2	-6.99	73	113	H
			5.725860	65.07	Pk	35.00	0.00	-36.70	63.37	-	-	68.2	-4.83	73	113	H
			5.725000	58.42	Pk	35.00	0.00	-36.70	56.72	-	-	68.2	-11.48	273	149	V
			5.725435	61.67	Pk	35.00	0.00	-36.70	59.97	-	-	68.2	-8.23	273	149	V
		16	5.725000	56.68	Pk	34.60	0.00	-30.20	61.08	-	-	68.2	-7.12	332	165	H
			5.726716	58.44	Pk	34.60	0.00	-30.10	62.94	-	-	68.2	-5.26	332	165	H
			5.725000	50.65	Pk	34.60	0.00	-30.20	55.05	-	-	68.2	-13.15	278	199	V
			5.775004	53.04	Pk	34.70	0.00	-30.10	57.64	-	-	68.2	-10.56	278	199	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

80MHz

UNII-2C (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Ftr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT80 SU Mode	5530	6	* 5.460000	58.93	Pk	35.2	0.00	-37.50	56.63	-	-	74	-17.37	316	225	H
			* 5.456710	63.00	Pk	35.1	0.00	-37.50	60.60	-	-	74	-13.40	316	225	H
			5.470000	60.10	Pk	35.2	0.00	-37.60	57.70	-	-	68.2	-10.50	316	225	H
			5.467599	65.48	Pk	35.2	0.00	-37.54	63.14	-	-	68.2	-5.06	316	225	H
			* 5.460000	46.99	RMS	35.2	0.00	-37.50	44.69	54	-9.31	-	-	316	225	H
			* 5.454977	48.34	RMS	35.1	0.00	-37.50	45.94	54	-8.06	-	-	316	225	H
			5.470000	47.73	RMS	35.2	0.00	-37.60	45.33	-	-	-	-	316	225	H
			* 5.454977	48.34	RMS	35.1	0.00	-37.50	45.94	54	-8.06	-	-	316	225	H
			* 5.460000	56.55	Pk	35.2	0.00	-37.50	54.25	-	-	74	-19.75	285	325	V
			* 5.415110	59.47	Pk	35.0	0.00	-37.60	56.87	-	-	74	-17.13	285	325	V
			5.470000	57.43	Pk	35.2	0.00	-37.60	55.03	-	-	68.2	-13.17	285	325	V
			5.465710	59.63	Pk	35.2	0.00	-37.56	57.27	-	-	68.2	-10.93	285	325	V
			* 5.460000	46.44	RMS	35.2	0.00	-37.50	44.14	54	-9.86	-	-	285	325	V
			* 5.459221	47.29	RMS	35.2	0.00	-37.50	44.99	54	-9.01	-	-	285	325	V
			5.470000	46.94	RMS	35.2	0.00	-37.60	44.54	-	-	-	-	285	325	V
			* 5.459221	47.29	RMS	35.2	0.00	-37.50	44.99	54	-9.01	-	-	285	325	V
		16	* 5.460000	60.54	Pk	35.2	0.00	-37.50	58.24	-	-	74	-15.76	319	295	H
			* 5.455999	62.81	Pk	35.1	0.00	-37.50	60.41	-	-	74	-13.59	319	295	H
			5.470000	61.52	Pk	35.2	0.00	-37.60	59.12	-	-	68.2	-9.08	319	295	H
			5.467754	65.70	Pk	35.2	0.00	-37.52	63.38	-	-	68.2	-4.82	319	295	H
			* 5.460000	48.25	RMS	35.2	0.00	-37.50	45.95	54	-8.05	-	-	319	295	H
			* 5.456310	48.70	RMS	35.1	0.00	-37.50	46.30	54	-7.70	-	-	319	295	H
			5.470000	47.75	RMS	35.2	0.00	-37.60	45.35	-	-	-	-	319	295	H
			* 5.456310	48.70	RMS	35.1	0.00	-37.50	46.30	54	-7.70	-	-	319	295	H
			* 5.460000	57.20	Pk	35.2	0.00	-37.50	54.90	-	-	74	-19.10	279	397	V
			* 5.459377	59.59	Pk	35.2	0.00	-37.50	57.29	-	-	74	-16.71	279	397	V
			5.470000	57.67	Pk	35.2	0.00	-37.60	55.27	-	-	68.2	-12.93	279	397	V
			5.462688	59.47	Pk	35.2	0.00	-37.57	57.10	-	-	68.2	-11.10	279	397	V
			* 5.460000	46.78	RMS	35.2	0.00	-37.50	44.48	54	-9.52	-	-	279	397	V
			* 5.351778	47.64	RMS	34.9	0.00	-37.20	45.34	54	-8.66	-	-	279	397	V
			5.470000	45.95	RMS	35.2	0.00	-37.60	43.55	-	-	-	-	279	397	V
			* 5.351778	47.64	RMS	34.9	0.00	-37.20	45.34	54	-8.66	-	-	279	397	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

160MHz

UNII-2C (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Ftr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT160 SU Mode	5570 (Lower)	6	* 5.460000	61.59	Pk	34.40	0.00	-34.65	61.34	-	-	74	-12.66	208	315	H
			* 5.453355	63.22	Pk	34.40	0.00	-34.69	62.93	-	-	74	-11.07	208	315	H
			5.470000	60.78	Pk	34.40	0.00	-34.61	60.57	-	-	68.2	-7.63	208	315	H
			5.468954	63.73	Pk	34.40	0.00	-34.63	63.50	-	-	68.2	-4.70	208	315	H
			* 5.460000	46.02	RMS	34.40	0.14	-34.65	45.91	54	-8.09	-	-	208	315	H
			* 5.440777	47.76	RMS	34.50	0.14	-34.61	47.79	54	-6.21	-	-	208	315	H
			5.470000	46.33	RMS	34.40	0.14	-34.61	46.26	-	-	-	-	208	315	H
			* 5.440777	47.76	RMS	34.50	0.14	-34.61	47.79	54	-6.21	-	-	208	315	H
			* 5.460000	57.18	Pk	34.40	0.00	-34.65	56.93	-	-	74	-17.07	268	260	V
			* 5.440732	59.39	Pk	34.50	0.00	-34.61	59.28	-	-	74	-14.72	268	260	V
			5.470000	56.44	Pk	34.40	0.00	-34.61	56.23	-	-	68.2	-11.97	268	260	V
			5.464177	59.79	Pk	34.40	0.00	-34.66	59.53	-	-	68.2	-8.67	268	260	V
			* 5.460000	45.31	RMS	34.40	0.14	-34.65	45.20	54	-8.80	-	-	268	260	V
			* 5.437132	46.21	RMS	34.50	0.14	-34.54	46.31	54	-7.69	-	-	268	260	V
			5.470000	44.95	RMS	34.40	0.14	-34.61	44.88	-	-	-	-	268	260	V
			* 5.437132	46.21	RMS	34.50	0.14	-34.54	46.31	54	-7.69	-	-	268	260	V
		16	* 5.460000	58.33	Pk	35.20	0.00	-37.50	56.03	-	-	74	-17.97	328	138	H
			* 5.437844	68.24	Pk	35.10	0.00	-37.68	65.66	-	-	74	-8.34	328	138	H
			5.470000	60.83	Pk	35.20	0.00	-37.60	58.43	-	-	68.2	-9.77	328	138	H
			5.468999	65.18	Pk	35.20	0.00	-37.50	62.88	-	-	68.2	-5.32	328	138	H
			* 5.460000	46.96	RMS	35.20	0.14	-37.50	44.80	54	-9.20	-	-	328	138	H
			* 5.439621	49.49	RMS	35.10	0.14	-37.60	47.13	54	-6.87	-	-	328	138	H
			5.470000	47.24	RMS	35.20	0.14	-37.60	44.98	-	-	-	-	328	138	H
			* 5.439621	49.49	RMS	35.10	0.14	-37.60	47.13	54	-6.87	-	-	328	138	H
			* 5.460000	56.93	Pk	35.20	0.00	-37.50	54.63	-	-	74	-19.37	246	185	V
			* 5.427821	60.63	Pk	35.10	0.00	-37.40	58.33	-	-	74	-15.67	246	185	V
			5.470000	57.19	Pk	35.20	0.00	-37.60	54.79	-	-	68.2	-13.41	246	185	V
			5.469354	59.61	Pk	35.20	0.00	-37.54	57.27	-	-	68.2	-10.93	246	185	V
			* 5.460000	46.05	RMS	35.20	0.14	-37.50	43.89	54	-10.11	-	-	246	185	V
			* 5.356355	47.63	RMS	34.90	0.14	-37.30	45.37	54	-8.63	-	-	246	185	V
			5.470000	46.31	RMS	35.20	0.14	-37.60	44.05	-	-	-	-	246	185	V
			* 5.356355	47.63	RMS	34.90	0.14	-37.30	45.37	54	-8.63	-	-	246	185	V
EHT160 SU Mode	5570 (Upper)	6	5.725000	61.84	Pk	35.10	0.00	-35.06	61.88	-	-	68.2	-6.32	320	269	H
			5.725095	63.46	Pk	35.10	0.00	-35.06	63.50	-	-	68.2	-4.70	320	269	H
			5.725000	58.60	Pk	35.10	0.00	-35.06	58.64	-	-	68.2	-9.56	310	284	V
			5.725208	60.49	Pk	35.10	0.00	-35.06	60.53	-	-	68.2	-7.67	310	284	V
		16	5.725000	60.70	Pk	35.10	0.00	-35.06	60.74	-	-	68.2	-7.46	325	116	H
			5.725378	62.78	Pk	35.10	0.00	-35.06	62.82	-	-	68.2	-5.38	325	116	H
			5.725000	55.32	Pk	35.10	0.00	-35.06	55.36	-	-	68.2	-12.84	227	154	V
			5.744701	57.70	Pk	35.10	0.00	-34.95	57.85	-	-	68.2	-10.35	227	154	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.22. 802.11be SISO PARTIAL RU MODE IN UNII-2C BAND - BANDEDGE

20MHz

UNII-2C (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filt/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 52T - RU37	5500	6	* 5.460000	50.05	Pk	34.60	0.00	-33.90	50.75	-	-	74	-23.25	255	204	H
			* 5.450112	52.60	Pk	34.60	0.00	-34.00	53.20	-	-	74	-20.80	255	204	H
			5.470000	51.08	Pk	34.60	0.00	-33.90	51.78	-	-	68.2	-16.42	255	204	H
			5.468764	53.48	Pk	34.60	0.00	-33.90	54.18	-	-	68.2	-14.02	255	204	H
			* 5.460000	39.76	RMS	34.60	0.00	-33.90	40.46	54	-13.54	-	-	255	204	H
			* 5.452312	40.46	RMS	34.60	0.00	-33.90	41.16	54	-12.84	-	-	255	204	H
			5.470000	39.80	RMS	34.60	0.00	-33.90	40.50	-	-	-	-	255	204	H
			* 5.452312	40.46	RMS	34.60	0.00	-33.90	41.16	54	-12.84	-	-	255	204	H
			* 5.460000	49.18	Pk	34.60	0.00	-33.90	49.88	-	-	74	-24.12	168	105	V
			* 5.456238	52.30	Pk	34.60	0.00	-33.90	53.00	-	-	74	-21.00	168	105	V
			5.470000	49.75	Pk	34.60	0.00	-33.90	50.45	-	-	68.2	-17.75	168	105	V
			5.461013	51.90	Pk	34.60	0.00	-33.90	52.60	-	-	68.2	-15.60	168	105	V
			* 5.460000	39.21	RMS	34.60	0.00	-33.90	39.91	54	-14.09	-	-	168	105	V
			* 5.382504	40.38	RMS	34.60	0.00	-34.10	40.88	54	-13.12	-	-	168	105	V
			5.470000	38.84	RMS	34.60	0.00	-33.90	39.54	-	-	-	-	168	105	V
			* 5.382504	40.38	RMS	34.60	0.00	-34.10	40.88	54	-13.12	-	-	168	105	V
		16	* 5.460000	56.57	Pk	35.00	0.00	-38.30	53.27	-	-	74	-20.73	261	104	H
			* 5.415333	59.86	Pk	35.10	0.00	-38.40	56.56	-	-	74	-17.44	261	104	H
			5.470000	65.03	Pk	35.00	0.00	-38.40	61.63	-	-	68.2	-6.57	261	104	H
			5.469954	66.56	Pk	35.00	0.00	-38.40	63.16	-	-	68.2	-5.04	261	104	H
			* 5.460000	46.67	RMS	35.00	0.00	-38.30	43.37	54	-10.63	-	-	261	104	H
			* 5.452443	47.96	RMS	35.00	0.00	-38.30	44.66	54	-9.34	-	-	261	104	H
			5.470000	46.99	RMS	35.00	0.00	-38.40	43.59	-	-	-	-	261	104	H
			* 5.452443	47.96	RMS	35.00	0.00	-38.30	44.66	54	-9.34	-	-	261	104	H
			* 5.460000	57.57	Pk	35.00	0.00	-38.30	54.27	-	-	74	-19.73	276	195	V
			* 5.433221	60.21	Pk	35.00	0.00	-38.40	56.81	-	-	74	-17.19	276	195	V
			5.470000	56.92	Pk	35.00	0.00	-38.40	53.52	-	-	68.2	-14.68	276	195	V
			5.464999	59.37	Pk	35.00	0.00	-38.30	56.07	-	-	68.2	-12.13	276	195	V
			* 5.460000	46.31	RMS	35.00	0.00	-38.30	43.01	54	-10.99	-	-	276	195	V
			* 5.399266	47.62	RMS	35.00	0.00	-38.40	44.22	54	-9.78	-	-	276	195	V
			5.470000	46.36	RMS	35.00	0.00	-38.40	42.96	-	-	-	-	276	195	V
			* 5.399266	47.62	RMS	35.00	0.00	-38.40	44.22	54	-9.78	-	-	276	195	V
EHT20 52T - RU40	5700	6	5.725000	60.02	Pk	34.80	0.00	-33.30	61.52	-	-	68.2	-6.68	211	175	H
			5.725166	59.64	Pk	34.80	0.00	-33.30	61.14	-	-	68.2	-7.06	211	175	H
			5.725000	54.91	Pk	34.80	0.00	-33.30	56.41	-	-	68.2	-11.79	86	196	V
			5.725128	55.43	Pk	34.80	0.00	-33.30	56.93	-	-	68.2	-11.27	86	196	V
		16	5.725000	64.43	Pk	35.10	0.00	-37.50	62.03	-	-	68.2	-6.17	264	231	H
			5.725548	65.74	Pk	35.10	0.00	-37.55	63.29	-	-	68.2	-4.91	264	231	H
			5.725000	56.70	Pk	35.10	0.00	-37.50	54.30	-	-	68.2	-13.90	250	181	V
			5.784821	58.79	Pk	35.20	0.00	-37.40	56.59	-	-	68.2	-11.61	250	181	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

80MHz

UNII-2C (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT80 484+242T - RU93	5530	6	* 5.460000	59.69	Pk	34.70	0.00	-37.06	57.33	-	-	74	-16.67	235	138	H
			* 5.458177	63.77	Pk	34.70	0.00	-37.05	61.42	-	-	74	-12.58	235	138	H
			5.470000	64.81	Pk	34.70	0.00	-37.00	62.51	-	-	68.2	-5.69	235	138	H
			5.466466	65.79	Pk	34.70	0.00	-36.98	63.51	-	-	68.2	-4.69	235	138	H
			* 5.460000	47.08	RMS	34.70	0.00	-37.06	44.72	54	-9.28	-	-	235	138	H
			* 5.457954	47.71	RMS	34.70	0.00	-37.05	45.36	54	-8.64	-	-	235	138	H
			5.470000	47.25	RMS	34.70	0.00	-37.00	44.95	-	-	-	-	235	138	H
			* 5.457954	47.71	RMS	34.70	0.00	-37.05	45.36	54	-8.64	-	-	235	138	H
			* 5.460000	56.18	Pk	34.70	0.00	-37.06	53.82	-	-	74	-20.18	206	215	V
			* 5.351489	59.58	Pk	34.70	0.00	-37.18	57.10	-	-	74	-16.90	206	215	V
			5.470000	56.91	Pk	34.70	0.00	-37.00	54.61	-	-	68.2	-13.59	206	215	V
			5.469599	59.48	Pk	34.70	0.00	-36.99	57.19	-	-	68.2	-11.01	206	215	V
			* 5.460000	45.91	RMS	34.70	0.00	-37.06	43.55	54	-10.45	-	-	206	215	V
			* 5.390377	47.24	RMS	34.80	0.00	-37.19	44.85	54	-9.15	-	-	206	215	V
			5.470000	46.21	RMS	34.70	0.00	-37.00	43.91	-	-	-	-	206	215	V
			* 5.390377	47.24	RMS	34.80	0.00	-37.19	44.85	54	-9.15	-	-	206	215	V
		16	* 5.460000	52.63	Pk	34.90	0.00	-30.60	56.93	-	-	74	-17.07	319	117	H
			* 5.459963	56.83	Pk	34.90	0.00	-30.60	61.13	-	-	74	-12.87	319	117	H
			5.470000	53.55	Pk	34.90	0.00	-30.60	57.85	-	-	68.2	-10.35	319	117	H
			5.469264	58.44	Pk	34.90	0.00	-30.60	62.74	-	-	68.2	-5.46	319	117	H
			* 5.460000	41.19	RMS	34.90	0.00	-30.60	45.49	54	-8.51	-	-	319	117	H
			* 5.458738	42.07	RMS	34.90	0.00	-30.60	46.37	54	-7.63	-	-	319	117	H
			5.470000	42.23	RMS	34.90	0.00	-30.60	46.53	-	-	-	-	319	117	H
			* 5.458738	42.07	RMS	34.90	0.00	-30.60	46.37	54	-7.63	-	-	319	117	H
			* 5.460000	50.80	Pk	34.90	0.00	-30.60	55.10	-	-	74	-18.90	227	177	V
			* 5.350525	52.73	Pk	35.00	0.00	-30.70	57.03	-	-	74	-16.97	227	177	V
			5.470000	50.02	Pk	34.90	0.00	-30.60	54.32	-	-	68.2	-13.88	227	177	V
			5.466589	51.81	Pk	34.90	0.00	-30.60	56.11	-	-	68.2	-12.09	227	177	V
			* 5.460000	40.14	RMS	34.90	0.00	-30.60	44.44	54	-9.56	-	-	227	177	V
			* 5.369902	40.96	RMS	35.00	0.00	-30.70	45.26	54	-8.74	-	-	227	177	V
			5.470000	39.95	RMS	34.90	0.00	-30.60	44.25	-	-	-	-	227	177	V
			* 5.369902	40.96	RMS	35.00	0.00	-30.70	45.26	54	-8.74	-	-	227	177	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

160MHz

UNII-2C (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Ftr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT160 996+484T - S95	5570 (Lower)	6	* 5.460000	49.13	Pk	34.50	0.00	-23.95	59.68	-	-	74	-14.32	174	109	H
			* 5.416377	53.56	Pk	34.40	0.00	-24.07	63.89	-	-	74	-10.11	174	109	H
			5.470000	50.26	Pk	34.50	0.00	-23.95	60.81	-	-	68.2	-7.39	174	109	H
			5.469088	52.84	Pk	34.50	0.00	-23.98	63.36	-	-	68.2	-4.84	174	109	H
			* 5.460000	35.43	RMS	34.50	0.00	-23.95	45.98	54	-8.02	-	-	174	109	H
			* 5.458066	36.18	RMS	34.50	0.00	-24.00	46.68	54	-7.32	-	-	174	109	H
			5.470000	35.53	RMS	34.50	0.00	-23.95	46.08	-	-	-	-	174	109	H
			* 5.458066	36.18	RMS	34.50	0.00	-24.00	46.68	54	-7.32	-	-	174	109	H
			* 5.460000	44.31	Pk	34.50	0.00	-23.95	54.86	-	-	74	-19.14	321	247	V
			* 5.382733	45.56	Pk	34.40	0.00	-24.18	55.78	-	-	74	-18.22	321	247	V
			5.470000	42.45	Pk	34.50	0.00	-23.95	53.00	-	-	68.2	-15.20	321	247	V
			5.460421	44.95	Pk	34.50	0.00	-23.96	55.49	-	-	68.2	-12.71	321	247	V
			* 5.460000	31.92	RMS	34.50	0.00	-23.95	42.47	54	-11.53	-	-	321	247	V
			* 5.447310	33.45	RMS	34.50	0.00	-24.08	43.87	54	-10.13	-	-	321	247	V
			5.470000	32.52	RMS	34.50	0.00	-23.95	43.07	-	-	-	-	321	247	V
			* 5.447310	33.45	RMS	34.50	0.00	-24.08	43.87	54	-10.13	-	-	321	247	V
		16	* 5.460000	57.50	Pk	35.20	0.00	-37.50	55.20	-	-	74	-18.80	328	137	H
			* 5.417644	62.38	Pk	35.00	0.00	-37.60	59.78	-	-	74	-14.22	328	137	H
			5.470000	57.32	Pk	35.20	0.00	-37.60	54.92	-	-	68.2	-13.28	328	137	H
			5.468777	65.73	Pk	35.20	0.00	-37.50	63.43	-	-	68.2	-4.77	328	137	H
			* 5.460000	47.14	RMS	35.20	0.00	-37.50	44.84	54	-9.16	-	-	328	137	H
			* 5.451999	48.17	RMS	35.10	0.00	-37.50	45.77	54	-8.23	-	-	328	137	H
			5.470000	46.70	RMS	35.20	0.00	-37.60	44.30	-	-	-	-	328	137	H
			* 5.451999	48.17	RMS	35.10	0.00	-37.50	45.77	54	-8.23	-	-	328	137	H
			* 5.460000	56.42	Pk	35.20	0.00	-37.50	54.12	-	-	74	-19.88	246	185	V
			* 5.360644	59.72	Pk	34.90	0.00	-37.50	57.12	-	-	74	-16.88	246	185	V
			5.470000	56.56	Pk	35.20	0.00	-37.60	54.16	-	-	68.2	-14.04	246	185	V
			5.463510	58.41	Pk	35.20	0.00	-37.60	56.01	-	-	68.2	-12.19	246	185	V
			* 5.460000	46.65	RMS	35.20	0.00	-37.50	44.35	54	-9.65	-	-	246	185	V
			* 5.446977	47.51	RMS	35.10	0.00	-37.60	45.01	54	-8.99	-	-	246	185	V
			5.470000	46.73	RMS	35.20	0.00	-37.60	44.33	-	-	-	-	246	185	V
			* 5.446977	47.51	RMS	35.10	0.00	-37.60	45.01	54	-8.99	-	-	246	185	V
EHT160 996+484T - RU94	5570 (Upper)	6	5.725000	60.14	Pk	35.10	0.00	-35.06	60.18	-	-	68.2	-8.02	351	270	H
			5.726030	62.72	Pk	35.10	0.00	-35.06	62.76	-	-	68.2	-5.44	351	270	H
			5.725000	56.58	Pk	35.10	0.00	-35.06	56.62	-	-	68.2	-11.58	309	280	V
			5.725322	59.85	Pk	35.10	0.00	-35.06	59.89	-	-	68.2	-8.31	309	280	V
		16	5.725000	62.18	Pk	35.10	0.00	-35.06	62.22	-	-	68.2	-5.98	320	108	H
			5.725378	63.49	Pk	35.10	0.00	-35.06	63.53	-	-	68.2	-4.67	320	108	H
			5.725000	56.05	Pk	35.10	0.00	-35.06	56.09	-	-	68.2	-12.11	250	146	V
			5.791564	57.96	Pk	35.10	0.00	-35.01	58.05	-	-	68.2	-10.15	250	146	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.23. 802.11be MIMO SU MODE IN UNII-2C BAND – BANDEDGE**20MHz**

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity	
EHT20 SU Mode	5500	6+16	* 5.460000	55.76	Pk	34.40	0.00	-34.65	55.51	-	-	74	-18.49	206	272	H	
			* 5.383355	58.53	Pk	34.50	0.00	-34.82	58.21	-	-	74	-15.79	206	272	H	
			5.470000	60.61	Pk	34.40	0.00	-34.61	60.40	-	-	-	68.2	-7.80	206	272	H
			5.469532	63.68	Pk	34.40	0.00	-34.62	63.46	-	-	-	68.2	-4.74	206	272	H
			* 5.460000	45.21	RMS	34.40	0.00	-34.65	44.96	54	-9.04	-	-	-	206	272	H
			* 5.425821	45.89	RMS	34.50	0.00	-34.70	45.69	54	-8.31	-	-	-	206	272	H
			5.470000	45.42	RMS	34.40	0.00	-34.61	45.21	-	-	-	-	-	206	272	H
			* 5.425821	45.89	RMS	34.50	0.00	-34.70	45.69	54	-8.31	-	-	-	206	272	H
			* 5.460000	54.41	Pk	34.40	0.00	-34.65	54.16	-	-	-	74	-19.84	199	260	V
			* 5.398888	57.93	Pk	34.50	0.00	-34.78	57.65	-	-	-	74	-16.35	199	260	V
	5.470000		55.85	Pk	34.40	0.00	-34.61	55.64	-	-	-	68.2	-12.56	199	260	V	
	5.462977		57.12	Pk	34.40	0.00	-34.66	56.86	-	-	-	68.2	-11.34	199	260	V	
	* 5.460000		44.17	RMS	34.40	0.00	-34.65	43.92	54	-10.08	-	-	-	199	260	V	
	* 5.375378		45.72	RMS	34.50	0.00	-34.86	45.36	54	-8.64	-	-	-	199	260	V	
	5.470000		44.13	RMS	34.40	0.00	-34.61	43.92	-	-	-	-	-	199	260	V	
	* 5.375378		45.72	RMS	34.50	0.00	-34.86	45.36	54	-8.64	-	-	-	199	260	V	
	5.725000		55.48	Pk	34.70	0.00	-31.75	58.43	-	-	-	68.2	-9.77	248	140	H	
	5.725868		59.84	Pk	34.70	0.00	-31.73	62.81	-	-	-	68.2	-5.39	248	140	H	
	5.725000		54.73	Pk	34.70	0.00	-31.75	57.68	-	-	-	68.2	-10.52	109	176	V	
	5.814923		56.84	Pk	35.00	0.00	-31.67	60.17	-	-	-	68.2	-8.03	109	176	V	

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

40MHz

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT40 SU Mode	5510	6+16	* 5.460000	58.96	Pk	35.20	0.00	-37.50	56.66	-	-	74	-17.34	315	103	H
			* 5.459799	61.71	Pk	35.20	0.00	-37.50	59.41	-	-	74	-14.59	315	103	H
			5.470000	61.86	Pk	35.20	0.00	-37.60	59.46	-	-	68.2	-8.74	315	103	H
			5.469843	65.98	Pk	35.20	0.00	-37.58	63.60	-	-	68.2	-4.60	315	103	H
			* 5.460000	47.44	RMS	35.20	0.00	-37.50	45.14	54	-8.86	-	-	315	103	H
			* 5.459177	47.67	RMS	35.20	0.00	-37.50	45.37	54	-8.63	-	-	315	103	H
			5.470000	47.76	RMS	35.20	0.00	-37.60	45.36	-	-	-	-	315	103	H
			* 5.459177	47.67	RMS	35.20	0.00	-37.50	45.37	54	-8.63	-	-	315	103	H
			* 5.460000	57.08	Pk	35.20	0.00	-37.50	54.78	-	-	74	-19.22	257	175	V
			* 5.426533	59.79	Pk	35.10	0.00	-37.45	57.44	-	-	74	-16.56	257	175	V
			5.470000	57.09	Pk	35.20	0.00	-37.60	54.69	-	-	68.2	-13.51	257	175	V
			5.461999	58.76	Pk	35.20	0.00	-37.50	56.46	-	-	68.2	-11.74	257	175	V
			* 5.460000	45.63	RMS	35.20	0.00	-37.50	43.33	54	-10.67	-	-	257	175	V
			* 5.444310	47.60	RMS	35.10	0.00	-37.60	45.10	54	-8.90	-	-	257	175	V
			5.470000	46.20	RMS	35.20	0.00	-37.60	43.80	-	-	-	-	257	175	V
	* 5.444310	47.60	RMS	35.10	0.00	-37.60	45.10	54	-8.90	-	-	257	175	V		
	5670	5.725000	63.63	Pk	35.00	0.00	-36.70	61.93	-	-	68.2	-6.27	326	120	H	
		5.725378	64.83	Pk	35.00	0.00	-36.70	63.13	-	-	68.2	-5.07	326	120	H	
		5.725000	56.53	Pk	35.00	0.00	-36.70	54.83	-	-	68.2	-13.37	293	161	V	
		5.727560	59.65	Pk	35.00	0.00	-36.60	58.05	-	-	68.2	-10.15	293	161	V	

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

80MHz

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT80 SU Mode	5530	6+16	* 5.460000	57.28	Pk	34.50	0.00	-35.04	56.74	-	-	74	-17.26	282	237	H
			* 5.454710	61.40	Pk	34.40	0.00	-35.06	60.74	-	-	74	-13.26	282	237	H
			5.470000	59.77	Pk	34.50	0.00	-35.00	59.27	-	-	68.2	-8.93	282	237	H
			5.469621	63.46	Pk	34.50	0.00	-35.00	62.96	-	-	68.2	-5.24	282	237	H
			* 5.460000	46.26	RMS	34.50	0.00	-35.04	45.72	54	-8.28	-	-	282	237	H
			* 5.459466	47.29	RMS	34.50	0.00	-35.04	46.75	54	-7.25	-	-	282	237	H
			5.470000	47.22	RMS	34.50	0.00	-35.00	46.72	-	-	-	-	282	237	H
			* 5.459466	47.29	RMS	34.50	0.00	-35.04	46.75	54	-7.25	-	-	282	237	H
			* 5.460000	55.76	Pk	34.50	0.00	-35.04	55.22	-	-	74	-18.78	211	226	V
			* 5.365067	57.75	Pk	34.50	0.00	-35.34	56.91	-	-	74	-17.09	211	226	V
			5.470000	55.76	Pk	34.50	0.00	-35.00	55.26	-	-	68.2	-12.94	211	226	V
			5.469332	57.93	Pk	34.50	0.00	-35.00	57.43	-	-	68.2	-10.77	211	226	V
			* 5.460000	44.76	RMS	34.50	0.00	-35.04	44.22	54	-9.78	-	-	211	226	V
			* 5.363933	46.10	RMS	34.50	0.00	-35.34	45.26	54	-8.74	-	-	211	226	V
			5.470000	45.48	RMS	34.50	0.00	-35.00	44.98	-	-	-	-	211	226	V
			* 5.363933	46.10	RMS	34.50	0.00	-35.34	45.26	54	-8.74	-	-	211	226	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

160MHz

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT160 SU Mode	5570 (Lower)	6+16	* 5.460000	60.74	Pk	34.60	0.00	-39.40	55.94	-	-	74	-18.06	2	229	H
			* 5.437710	70.16	Pk	34.50	0.00	-39.40	65.26	-	-	74	-8.74	2	229	H
			5.470000	60.42	Pk	34.60	0.00	-39.30	55.72	-	-	68.2	-12.48	2	229	H
			5.467221	68.16	Pk	34.60	0.00	-39.40	63.36	-	-	68.2	-4.84	2	229	H
			* 5.460000	49.85	RMS	34.60	0.14	-39.40	45.19	54	-8.81	-	-	2	229	H
			* 5.437377	51.92	RMS	34.50	0.14	-39.40	47.16	54	-6.84	-	-	2	229	H
			5.470000	49.88	RMS	34.60	0.14	-39.30	45.32	-	-	-	-	2	229	H
			* 5.437377	51.92	RMS	34.50	0.14	-39.40	47.16	54	-6.84	-	-	2	229	H
			* 5.460000	56.70	Pk	34.60	0.00	-39.40	51.90	-	-	74	-22.10	265	394	V
			* 5.358178	59.86	Pk	34.60	0.00	-39.50	54.96	-	-	74	-19.04	265	394	V
			5.470000	57.23	Pk	34.60	0.00	-39.30	52.53	-	-	68.2	-15.67	265	394	V
			5.468043	58.92	Pk	34.60	0.00	-39.40	54.12	-	-	68.2	-14.08	265	394	V
			* 5.460000	46.62	RMS	34.60	0.14	-39.40	41.96	54	-12.04	-	-	265	394	V
			* 5.366911	47.37	RMS	34.60	0.14	-39.40	42.71	54	-11.29	-	-	265	394	V
			5.470000	45.97	RMS	34.60	0.14	-39.30	41.41	-	-	-	-	265	394	V
			* 5.366911	47.37	RMS	34.60	0.14	-39.40	42.71	54	-11.29	-	-	265	394	V
EHT160 SU Mode	5570 (Upper)	6+16	5.725000	61.66	Pk	34.50	0.00	-34.41	61.75	-	-	68.2	-6.45	98	208	H
			5.729940	62.91	Pk	34.50	0.00	-34.40	63.01	-	-	68.2	-5.19	98	208	H
			5.725000	54.86	Pk	34.50	0.00	-34.41	54.95	-	-	68.2	-13.25	4	122	V
			5.728013	58.25	Pk	34.50	0.00	-34.41	58.34	-	-	68.2	-9.86	4	122	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.24. 802.11be MIMO PARTIAL RU MODE IN UNII-2C BAND – BANDEDGE

20MHz

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl /Ftr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 52T - RU37	5500	6+16	* 5.460000	56.91	Pk	34.6	0.00	-35.21	56.30	-	-	74	-17.70	326	217	H
			* 5.448110	59.23	Pk	34.6	0.00	-35.20	58.63	-	-	74	-15.37	326	217	H
			5.470000	60.22	Pk	34.6	0.00	-35.15	59.67	-	-	68.2	-8.53	326	217	H
			5.469243	60.78	Pk	34.6	0.00	-35.17	60.21	-	-	68.2	-7.99	326	217	H
			* 5.460000	45.78	RMS	34.6	0.00	-35.21	45.17	54	-8.83	-	-	326	217	H
			* 5.444955	46.84	RMS	34.6	0.00	-35.20	46.24	54	-7.76	-	-	326	217	H
			5.470000	46.39	RMS	34.6	0.00	-35.15	45.84	-	-	-	-	326	217	H
			* 5.444955	46.84	RMS	34.6	0.00	-35.20	46.24	54	-7.76	-	-	326	217	H
			* 5.460000	55.90	Pk	34.6	0.00	-35.21	55.29	-	-	74	-18.71	264	194	V
			* 5.417510	58.41	Pk	34.6	0.00	-35.27	57.74	-	-	74	-16.26	264	194	V
			5.470000	56.49	Pk	34.6	0.00	-35.15	55.94	-	-	68.2	-12.26	264	194	V
			5.465754	57.66	Pk	34.6	0.00	-35.19	57.07	-	-	68.2	-11.13	264	194	V
			* 5.460000	44.27	RMS	34.6	0.00	-35.21	43.66	54	-10.34	-	-	264	194	V
			* 5.412666	46.04	RMS	34.6	0.00	-35.24	45.40	54	-8.60	-	-	264	194	V
			5.470000	44.34	RMS	34.6	0.00	-35.15	43.79	-	-	-	-	264	194	V
			* 5.412666	46.04	RMS	34.6	0.00	-35.24	45.40	54	-8.60	-	-	264	194	V
EHT20 52T - RU40	5700	6+16	5.725000	62.81	Pk	35.1	0.00	-37.50	60.41	-	-	68.2	-7.79	186	204	H
			5.725067	64.58	Pk	35.1	0.00	-37.51	62.17	-	-	68.2	-6.03	186	204	H
			5.725000	61.56	Pk	35.1	0.00	-37.50	59.16	-	-	68.2	-9.04	47	149	V
			5.732291	62.84	Pk	35.1	0.00	-37.53	60.41	-	-	68.2	-7.79	47	149	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

80MHz

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl /Ftr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT80 484+242T - RU93	5530	6+16	* 5.460000	55.85	Pk	34.50	0.00	-35.04	55.31	-	-	74	-18.69	310	214	H
			* 5.456577	61.34	Pk	34.50	0.00	-35.05	60.79	-	-	74	-13.21	310	214	H
			5.470000	57.16	Pk	34.50	0.00	-35.00	56.66	-	-	68.2	-11.54	310	214	H
			5.461799	63.26	Pk	34.50	0.00	-35.03	62.73	-	-	68.2	-5.47	310	214	H
			* 5.460000	45.81	RMS	34.50	0.00	-35.04	45.27	54	-8.73	-	-	310	214	H
			* 5.456332	46.50	RMS	34.40	0.00	-35.05	45.85	54	-8.15	-	-	310	214	H
			5.470000	45.98	RMS	34.50	0.00	-35.00	45.48	-	-	-	-	310	214	H
			* 5.456332	46.50	RMS	34.40	0.00	-35.05	45.85	54	-8.15	-	-	310	214	H
			* 5.460000	55.81	Pk	34.50	0.00	-35.04	55.27	-	-	74	-18.73	210	209	V
			* 5.447110	58.01	Pk	34.40	0.00	-35.09	57.32	-	-	74	-16.68	210	209	V
			5.470000	55.37	Pk	34.50	0.00	-35.00	54.87	-	-	68.2	-13.33	210	209	V
			5.464377	57.07	Pk	34.50	0.00	-35.02	56.55	-	-	68.2	-11.65	210	209	V
			* 5.460000	44.77	RMS	34.50	0.00	-35.04	44.23	54	-9.77	-	-	210	209	V
			* 5.358111	46.17	RMS	34.50	0.00	-35.35	45.32	54	-8.68	-	-	210	209	V
			5.470000	45.05	RMS	34.50	0.00	-35.00	44.55	-	-	-	-	210	209	V
			* 5.358111	46.17	RMS	34.50	0.00	-35.35	45.32	54	-8.68	-	-	210	209	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

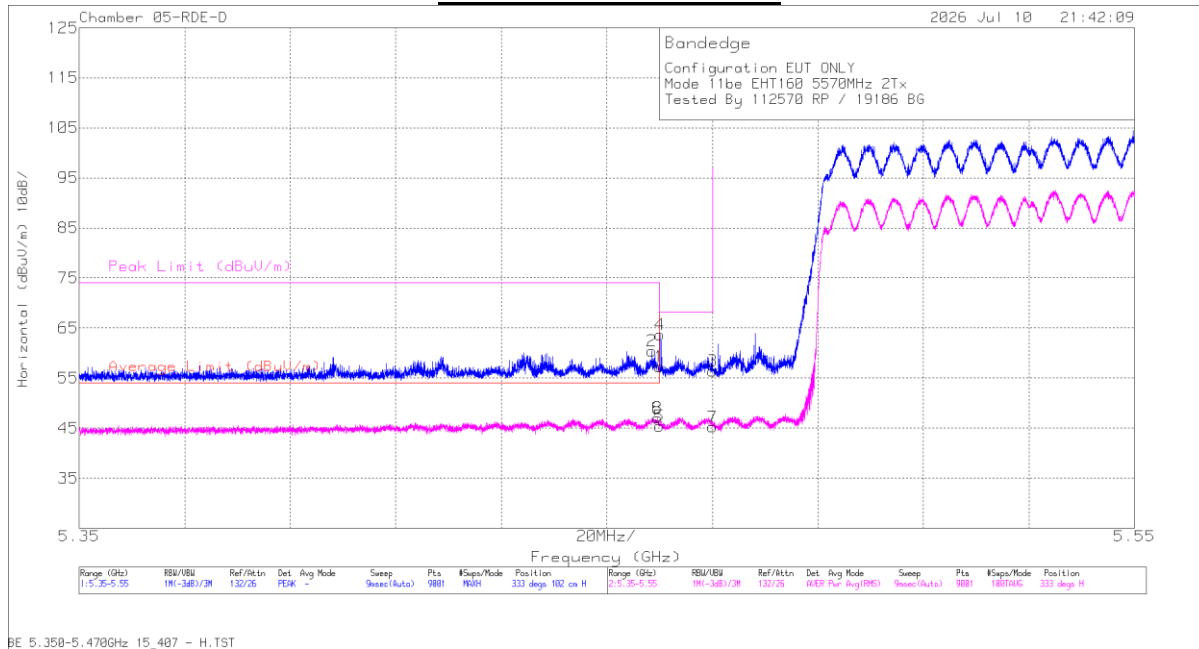
160MHz

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT160 996+484T - S95	5570 (Lower)	6+16	* 5.460000	57.88	Pk	34.60	0.00	-35.21	57.27	-	-	74	-16.73	333	102	H
			* 5.458532	61.01	Pk	34.60	0.00	-35.20	60.41	-	-	74	-13.59	333	102	H
			5.470000	56.98	Pk	34.60	0.00	-35.15	56.43	-	-	68.2	-11.77	333	102	H
			5.460066	64.28	Pk	34.60	0.00	-35.21	63.67	-	-	68.2	-4.53	333	102	H
			* 5.460000	46.05	RMS	34.60	0.00	-35.21	45.44	54	-8.56	-	-	333	102	H
			* 5.459599	47.61	RMS	34.60	0.00	-35.21	47.00	54	-7.00	-	-	333	102	H
			5.470000	45.77	RMS	34.60	0.00	-35.15	45.22	-	-	-	-	333	102	H
			* 5.459599	47.61	RMS	34.60	0.00	-35.21	47.00	54	-7.00	-	-	333	102	H
			* 5.460000	55.93	Pk	34.60	0.00	-35.21	55.32	-	-	74	-18.68	36	176	V
			* 5.456088	58.28	Pk	34.60	0.00	-35.19	57.69	-	-	74	-16.31	36	176	V
			5.470000	56.10	Pk	34.60	0.00	-35.15	55.55	-	-	68.2	-12.65	36	176	V
			5.460088	58.37	Pk	34.60	0.00	-35.21	57.76	-	-	68.2	-10.44	36	176	V
			* 5.460000	44.79	RMS	34.60	0.00	-35.21	44.18	54	-9.82	-	-	36	176	V
			* 5.444332	46.17	RMS	34.60	0.00	-35.20	45.57	54	-8.43	-	-	36	176	V
EHT160 996+484T - RU94	5570 (Upper)	6+16	5.470000	45.15	RMS	34.60	0.00	-35.15	44.60	-	-	-	-	36	176	V
			* 5.444332	46.17	RMS	34.60	0.00	-35.20	45.57	54	-8.43	-	-	36	176	V
			5.725000	57.31	Pk	34.40	0.00	-37.60	54.11	-	-	68.2	-14.09	84	164	V
			5.776264	60.92	Pk	34.50	0.00	-37.50	57.92	-	-	68.2	-10.28	84	164	V
			5.725000	60.92	Pk	34.40	0.00	-37.60	57.72	-	-	68.2	-10.48	137	205	H
			5.776378	66.43	Pk	34.50	0.00	-37.50	63.43	-	-	68.2	-4.77	137	205	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

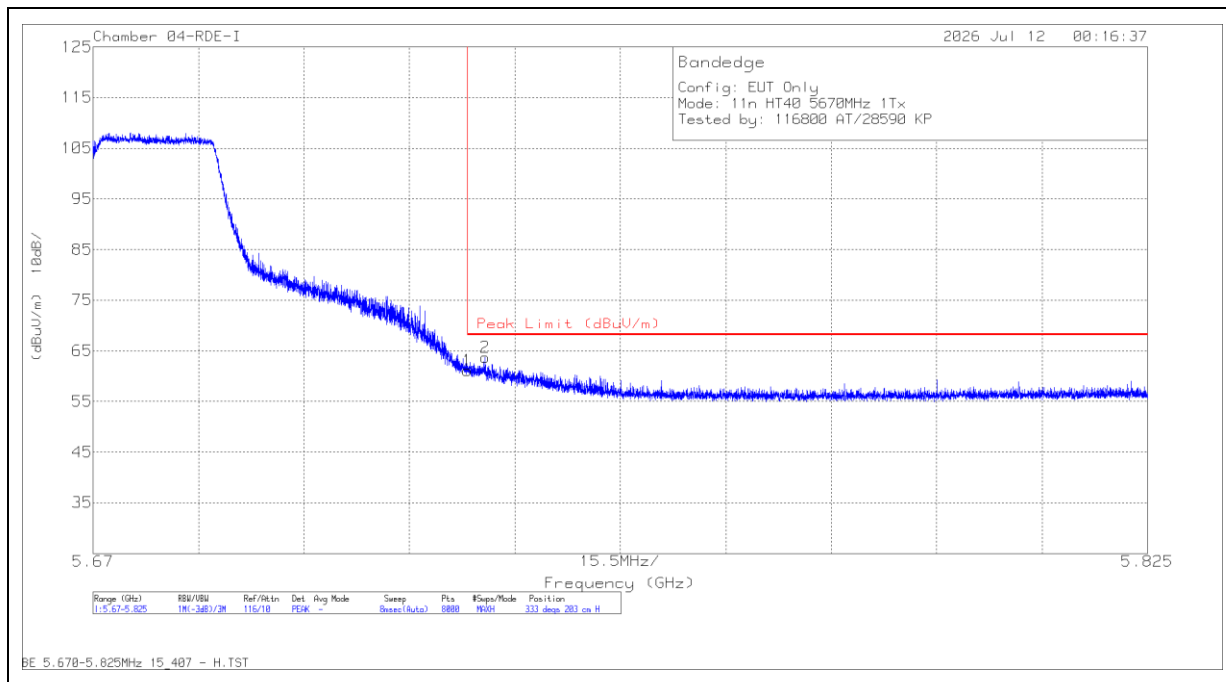
WORST-CASE BANDEDGE (LOW CHANNEL)**802.11be EHT160 / 5570 MHz / CDD 2TX / RU996 + 484T S95****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filt/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.460000	57.88	Pk	34.60	0.00	-35.21	57.27	-	-	74	-16.73	333	102	H
2	* 5.458532	61.01	Pk	34.60	0.00	-35.20	60.41	-	-	74	-13.59	333	102	H
3	5.470000	56.98	Pk	34.60	0.00	-35.15	56.43	-	-	68.2	-11.77	333	102	H
4	5.460066	64.28	Pk	34.60	0.00	-35.21	63.67	-	-	68.2	-4.53	333	102	H
5	* 5.460000	46.05	RMS	34.60	0.00	-35.21	45.44	54	-8.56	-	-	333	102	H
6	* 5.459599	47.61	RMS	34.60	0.00	-35.21	47.00	54	-7.00	-	-	333	102	H
7	5.470000	45.77	RMS	34.60	0.00	-35.15	45.22	-	-	-	-	333	102	H
8	* 5.459599	47.61	RMS	34.60	0.00	-35.21	47.00	54	-7.00	-	-	333	102	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

WORST-CASE BANDEDGE (HIGH CHANNEL)**802.11n HT40 / 5670 MHz / SISO 1TX****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/Fltr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725000	43.63	Pk	34.50	0.00	-17.00	61.13	-	-	68.2	-7.07	333	203	H
2	5.727647	46.20	Pk	34.50	0.00	-17.00	63.70	-	-	68.2	-4.5	333	203	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.25. 802.11n/ac MIMO MODE IN UNII-2C BAND – SPURIOUS EMISSIONS

20MHz

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity	
11n	5500	6 + 16	1.920383	57.70	PK-U	31.10	-46.40	0.00	42.40	-	-	68.2	-25.8	0	200	H	
			1.923349	57.24	PK-U	31.10	-46.41	0.00	41.93	-	-	68.2	-26.27	0	200	V	
			8.555504	54.02	PK-U	36.10	-42.48	0.00	47.64	-	-	68.2	-20.56	0	200	V	
			8.573473	53.09	PK-U	36.10	-42.51	0.00	46.68	-	-	68.2	-21.52	0	101	H	
			16.627367	54.30	PK-U	41.10	-41.59	0.00	53.81	-	-	68.2	-14.39	0	101	H	
	5580		16.647367	54.97	PK-U	41.30	-41.82	0.00	54.45	-	-	68.2	-13.75	0	101	V	
			* 11.143492	45.17	ADR	38.00	-45.09	0.00	38.08	54	-15.92	-	-	360	201	V	
			* 11.150765	56.87	PK-U	38.00	-44.97	0.00	49.90	-	-	74	-24.1	360	201	V	
			* 11.151075	45.06	ADR	38.00	-44.96	0.00	38.10	54	-15.9	-	-	360	100	H	
			* 11.152755	56.77	PK-U	38.00	-44.93	0.00	49.84	-	-	74	-24.16	360	100	H	
			* 2.772500	31.42	ADR	32.40	-26.06	0.00	37.76	54	-16.24	-	-	360	201	V	
			* 2.773521	31.67	ADR	32.40	-26.05	0.00	38.02	54	-15.98	-	-	360	100	H	
			* 2.777096	43.33	PK-U	32.40	-26.07	0.00	49.66	-	-	74	-24.34	360	100	H	
			* 2.802970	43.19	PK-U	32.40	-26.04	0.00	49.55	-	-	74	-24.45	360	201	V	
			16.731801	57.00	PK-U	40.80	-43.14	0.00	54.66	-	-	68.2	-13.54	360	200	V	
			16.736494	56.76	PK-U	40.80	-43.02	0.00	54.54	-	-	68.2	-13.66	360	100	H	
			5700	7.035200	56.16	PK-U	35.80	-46.33	0.00	45.63	-	-	68.2	-22.57	150	163	H
				7.045263	56.98	PK-U	35.80	-46.36	0.00	46.42	-	-	68.2	-21.78	137	392	V
				9.814701	56.91	PK-U	37.30	-44.89	0.00	49.32	-	-	68.2	-18.88	290	390	V
	9.816830			56.76	PK-U	37.30	-44.85	0.00	49.21	-	-	68.2	-18.99	2	377	H	
	14.232052			56.88	PK-U	39.20	-43.52	0.00	52.56	-	-	68.2	-15.64	255	147	H	
	5720		14.245142	56.84	PK-U	39.20	-43.54	0.00	52.50	-	-	68.2	-15.7	82	348	V	
			1.970627	57.63	PK-U	31.40	-46.52	0.00	42.51	-	-	68.2	-25.69	2	200	H	
			1.977717	58.29	PK-U	31.40	-46.52	0.00	43.17	-	-	68.2	-25.03	2	200	V	
			10.091607	53.95	PK-U	37.70	-42.04	0.00	49.61	-	-	68.2	-18.59	2	200	V	
			10.092203	53.65	PK-U	37.70	-42.04	0.00	49.31	-	-	68.2	-18.89	2	101	H	
			16.768714	55.80	PK-U	41.60	-41.50	0.00	55.90	-	-	68.2	-12.3	2	200	V	
			16.784237	54.62	PK-U	41.70	-41.50	0.00	54.82	-	-	68.2	-13.38	2	101	H	

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

40MHz

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11n	5510	6 + 16	* 4.210987	45.34	ADR	33.60	-46.80	0.00	32.14	54	-21.86	-	-	360	101	V
			* 4.211720	57.10	PK-U	33.60	-46.73	0.00	43.97	-	-	74	-30.03	360	101	V
			* 4.212814	56.77	PK-U	33.60	-46.70	0.00	43.67	-	-	74	-30.33	360	200	H
			* 4.218487	44.97	ADR	33.60	-46.45	0.00	32.12	54	-21.88	-	-	360	200	H
			* 8.371312	54.08	PK-U	36.00	-43.23	0.00	46.85	-	-	74	-27.15	360	101	V
			* 8.394336	53.24	PK-U	36.00	-43.00	0.00	46.24	-	-	74	-27.76	360	101	H
			* 8.396354	41.75	ADR	36.00	-43.14	0.00	34.61	54	-19.39	-	-	360	101	H
			* 8.399690	41.94	ADR	36.00	-43.03	0.00	34.91	54	-19.09	-	-	360	101	V
			16.728121	47.14	PK-U	42.10	-34.60	0.00	54.64	-	-	68.2	-13.56	360	200	V
			16.748963	46.70	PK-U	42.10	-34.50	0.00	54.30	-	-	68.2	-13.9	360	101	H
			* 4.005525	45.36	ADR	33.50	-47.20	0.00	31.66	54	-22.34	-	-	2	101	V
			* 4.011586	45.23	ADR	33.40	-47.10	0.00	31.53	54	-22.47	-	-	2	199	H
	5550		* 4.015539	57.42	PK-U	33.40	-46.95	0.00	43.87	-	-	74	-30.13	2	199	H
			* 4.016579	57.20	PK-U	33.40	-46.90	0.00	43.70	-	-	74	-30.3	2	101	V
			16.895876	47.87	PK-U	42.00	-34.20	0.00	55.67	-	-	68.2	-12.53	358	321	H
			16.913363	48.92	PK-U	42.00	-34.10	0.00	56.82	-	-	68.2	-11.38	24	390	V
			6.622205	56.22	PK-U	35.70	-44.90	0.00	47.02	-	-	68.2	-21.18	2	199	H
			6.639295	55.82	PK-U	35.70	-45.10	0.00	46.42	-	-	68.2	-21.78	2	199	V
			2.401476	59.11	PK-U	32.20	-48.00	0.00	43.31	-	-	68.2	-24.89	0	199	H
			2.411916	59.77	PK-U	32.30	-47.90	0.00	44.17	-	-	68.2	-24.03	0	101	V
			9.651673	52.77	PK-U	36.80	-41.50	0.00	48.07	-	-	68.2	-20.13	0	101	H
			9.686041	53.28	PK-U	36.90	-41.60	0.00	48.58	-	-	68.2	-19.62	0	101	V
			13.492345	51.35	PK-U	39.10	-39.00	0.00	51.45	-	-	68.2	-16.75	0	101	V
			13.521527	51.50	PK-U	39.00	-38.90	0.00	51.60	-	-	68.2	-16.6	0	101	H
	5670		2.444863	58.79	PK-U	32.30	-47.90	0.00	43.19	-	-	68.2	-25.01	0	101	V
			2.465997	59.07	PK-U	32.30	-47.70	0.00	43.67	-	-	68.2	-24.53	0	200	H
			10.011120	53.30	PK-U	37.30	-41.10	0.00	49.50	-	-	68.2	-18.7	0	200	V
			10.018396	52.90	PK-U	37.30	-41.10	0.00	49.10	-	-	68.2	-19.1	0	200	H
			14.635600	51.77	PK-U	39.50	-38.80	0.00	52.47	-	-	68.2	-15.73	0	200	H
			14.648478	51.38	PK-U	39.60	-38.80	0.00	52.18	-	-	68.2	-16.02	0	101	V
5710 (Straddle)																

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

80MHz

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11ac	5530	6 + 16	* 4.501145	58.48	PK-U	34.40	-47.91	0.00	44.97	-	-	74	-29.03	0	201	V
			* 4.502885	46.62	ADR	34.40	-47.91	0.00	33.11	54	-20.89	-	-	0	201	V
			* 4.965906	59.20	PK-U	34.20	-47.18	0.00	46.22	-	-	74	-27.78	0	100	H
			* 4.973094	47.06	ADR	34.20	-47.23	0.00	34.03	54	-19.97	-	-	0	100	H
			* 9.175487	44.76	ADR	36.50	-45.52	0.00	35.74	54	-18.26	-	-	0	200	V
			7.169073	57.57	PK-U	35.70	-46.64	0.00	46.63	-	-	68.2	-21.57	0	100	H
			7.190161	57.32	PK-U	35.70	-46.69	0.00	46.33	-	-	68.2	-21.87	0	201	V
			9.200329	56.34	PK-U	36.60	-45.44	0.00	47.50	-	-	68.2	-20.7	0	100	H
			9.201949	56.89	PK-U	36.60	-45.51	0.00	47.98	-	-	68.2	-20.22	0	200	V
			* 4.596022	58.44	PK-U	34.60	-47.95	0.00	45.09	-	-	74	-28.91	0	100	H
			* 4.597483	58.70	PK-U	34.60	-47.98	0.00	45.32	-	-	74	-28.68	0	201	V
			* 4.601890	46.79	ADR	34.60	-48.01	0.00	33.38	54	-20.62	-	-	0	201	V
	5610		* 4.603235	46.81	ADR	34.60	-47.98	0.00	33.43	54	-20.57	-	-	0	100	H
			* 7.356117	45.32	ADR	35.80	-46.54	0.00	34.58	54	-19.42	-	-	0	100	H
			* 7.356747	45.37	ADR	35.80	-46.55	0.00	34.62	54	-19.38	-	-	0	201	V
			* 7.363597	57.19	PK-U	35.70	-46.56	0.00	46.33	-	-	74	-27.67	0	100	H
			* 7.385849	57.00	PK-U	35.70	-46.59	0.00	46.11	-	-	74	-27.89	0	201	V
			* 9.414760	46.16	ADR	36.70	-45.97	0.00	36.89	54	-17.11	-	-	0	200	V
			* 9.416787	57.75	PK-U	36.70	-46.05	0.00	48.40	-	-	74	-25.6	0	200	V
			* 9.418395	57.20	PK-U	36.70	-46.10	0.00	47.80	-	-	74	-26.2	0	100	H
			* 9.440635	45.81	ADR	36.70	-45.99	0.00	36.52	54	-17.48	-	-	0	100	H
			* 11.992827	43.90	ADR	39.40	-43.78	0.00	39.52	54	-14.48	-	-	254	100	H
			* 11.996725	55.74	PK-U	39.40	-43.86	0.00	51.28	-	-	74	-22.72	254	100	H
			* 11.997383	43.93	ADR	39.40	-43.89	0.00	39.44	54	-14.56	-	-	254	200	V
	5690 (Straddle)		* 12.002548	55.90	PK-U	39.40	-43.97	0.00	51.33	-	-	74	-22.67	254	200	V
			* 3.736772	46.43	ADR	33.50	-47.29	0.00	32.64	54	-21.36	-	-	254	100	H
			* 3.739652	58.51	PK-U	33.60	-47.31	0.00	44.80	-	-	74	-29.2	254	100	H
			* 3.757657	58.04	PK-U	33.60	-47.29	0.00	44.35	-	-	74	-29.65	254	201	V
			* 3.764950	46.32	ADR	33.70	-47.23	0.00	32.79	54	-21.21	-	-	254	201	V
			* 7.452266	45.10	ADR	35.80	-46.25	0.00	34.65	54	-19.35	-	-	254	201	V
			* 7.472839	56.88	PK-U	35.80	-46.11	0.00	46.57	-	-	74	-27.43	254	201	V
			* 7.490915	45.45	ADR	35.80	-46.34	0.00	34.91	54	-19.09	-	-	254	100	H
			* 7.505315	57.58	PK-U	35.80	-46.44	0.00	46.94	-	-	74	-27.06	254	100	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

160MHz

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11ac	5570	6 + 16	* 2.773960	58.51	PK-U	32.40	-47.97	0.00	42.94	-	-	74	-31.06	360	100	H
			* 2.787340	46.30	ADR	32.40	-47.94	0.00	30.76	54	-23.24	-	-	360	201	V
			* 2.787346	57.82	PK-U	32.40	-47.94	0.00	42.28	-	-	74	-31.72	360	201	V
			* 2.787473	46.32	ADR	32.40	-47.94	0.00	30.78	54	-23.22	-	-	360	100	H
			* 11.105549	44.51	ADR	37.80	-44.50	0.00	37.81	54	-16.19	-	-	360	201	V
			* 11.111402	56.44	PK-U	37.80	-44.35	0.00	49.89	-	-	74	-24.11	360	201	V
			* 11.118005	56.15	PK-U	37.80	-44.31	0.00	49.64	-	-	74	-24.36	360	100	H
			* 11.119543	44.72	ADR	37.80	-44.28	0.00	38.24	54	-15.76	-	-	360	100	H
			16.707531	56.41	PK-U	41.40	-42.67	0.00	55.14	-	-	68.2	-13.06	360	100	H
			16.734149	56.25	PK-U	41.40	-43.06	0.00	54.59	-	-	68.2	-13.61	360	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.1.26. 802.11be SU MIMO MODE IN UNII-2C BAND – SPURIOUS EMISSIONS

20MHz

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 SU Mode	5500	6+16	* 11.001916	40.66	ADR	37.7	0.00	-40.54	37.82	54	-16.18	-	-	360	100	H
			* 11.002725	52.74	PK-U	37.7	0.00	-40.53	49.91	-	-	74	-24.09	360	100	H
			* 11.013836	40.84	ADR	37.7	0.00	-40.44	38.10	54	-15.9	-	-	360	201	V
			* 11.022556	53.29	PK-U	37.7	0.00	-40.23	50.76	-	-	74	-23.24	360	201	V
			* 2.733021	58.03	PK-U	32.2	0.00	-46.06	44.17	-	-	74	-29.83	360	201	V
			* 2.744927	57.41	PK-U	32.2	0.00	-46.10	43.51	-	-	74	-30.49	360	100	H
			* 2.750494	45.42	ADR	32.2	0.00	-46.07	31.55	54	-22.45	-	-	360	100	H
			* 2.753754	45.48	ADR	32.2	0.00	-46.13	31.55	54	-22.45	-	-	360	201	V
			16.519470	53.05	PK-U	40.8	0.00	-39.59	54.26	-	-	68.2	-13.94	360	100	H
			16.528447	52.20	PK-U	40.9	0.00	-39.73	53.37	-	-	68.2	-14.83	360	200	V
	5580		* 11.161678	53.29	PK-U	37.8	0.00	-40.35	50.74	-	-	74	-23.26	360	100	H
			* 11.167274	40.72	ADR	37.8	0.00	-40.27	38.25	54	-15.75	-	-	360	100	H
			* 11.187404	40.69	ADR	37.8	0.00	-40.17	38.32	54	-15.68	-	-	360	201	V
			* 11.191226	52.95	PK-U	37.8	0.00	-40.19	50.56	-	-	74	-23.44	360	201	V
			* 2.797835	45.42	ADR	32.3	0.00	-46.16	31.56	54	-22.44	-	-	360	201	V
			* 2.798682	45.44	ADR	32.3	0.00	-46.17	31.57	54	-22.43	-	-	360	100	H
			* 2.799575	56.91	PK-U	32.3	0.00	-46.19	43.02	-	-	74	-30.98	360	100	H
			* 2.817989	56.66	PK-U	32.3	0.00	-46.20	42.76	-	-	74	-31.24	360	201	V
			16.762095	52.10	PK-U	41.4	0.00	-39.16	54.34	-	-	68.2	-13.86	360	200	V
			16.777300	52.64	PK-U	41.5	0.00	-38.99	55.15	-	-	68.2	-13.05	360	100	H
	5700		* 11.394069	51.78	PK-U	38.0	0.00	-40.19	49.59	-	-	74	-24.41	360	100	H
			* 11.394761	40.41	ADR	38.0	0.00	-40.21	38.20	54	-15.8	-	-	360	201	V
			* 11.402775	40.77	ADR	38.0	0.00	-40.27	38.50	54	-15.5	-	-	360	100	H
			* 11.419321	52.25	PK-U	38.0	0.00	-40.57	49.68	-	-	74	-24.32	360	201	V
			* 2.844384	57.12	PK-U	32.4	0.00	-46.11	43.41	-	-	74	-30.59	360	201	V
			* 2.847458	45.57	ADR	32.4	0.00	-46.12	31.85	54	-22.15	-	-	360	201	V
			* 2.848797	45.70	ADR	32.4	0.00	-46.12	31.98	54	-22.02	-	-	360	100	H
			* 2.849737	57.94	PK-U	32.4	0.00	-46.11	44.23	-	-	74	-29.77	360	100	H
			17.095662	51.67	PK-U	41.3	0.00	-39.23	53.74	-	-	68.2	-14.46	360	200	V
			17.102678	53.35	PK-U	41.3	0.00	-39.51	55.14	-	-	68.2	-13.06	360	100	H
	5720		* 11.419349	40.75	ADR	38.2	0.00	-40.70	38.25	54	-15.75	-	-	0	101	H
			* 11.435459	52.52	PK-U	38.3	0.00	-40.40	50.42	-	-	74	-23.58	0	101	V
			* 11.439224	40.74	ADR	38.3	0.00	-40.30	38.74	54	-15.26	-	-	0	101	V
			* 11.442637	52.39	PK-U	38.3	0.00	-40.30	50.39	-	-	74	-23.61	0	101	H
			* 2.845952	56.30	PK-U	32.9	0.00	-46.10	43.10	-	-	74	-30.9	0	101	H
			* 2.846159	44.68	ADR	32.9	0.00	-46.10	31.48	54	-22.52	-	-	0	101	H
			* 2.849819	44.81	ADR	32.9	0.00	-46.10	31.61	54	-22.39	-	-	0	101	V
			* 2.851292	56.72	PK-U	32.9	0.00	-46.20	43.42	-	-	74	-30.58	0	101	V
			17.136991	52.28	PK-U	41.6	0.00	-37.80	56.08	-	-	68.2	-12.12	0	101	H
			17.172426	52.17	PK-U	41.5	0.00	-38.10	55.57	-	-	68.2	-12.63	0	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

40MHz

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT40 SU Mode	5510	6+16	3.003108	59.21	PK-U	32.9	0.00	-47.99	44.12	-	-	68.2	-24.08	0	101	H
			2.995310	59.00	PK-U	32.8	0.00	-48.00	43.80	-	-	68.2	-24.4	0	101	V
			9.987235	56.42	PK-U	37.3	0.00	-45.30	48.42	-	-	68.2	-19.78	0	101	H
			17.121677	53.47	PK-U	41.4	0.00	-40.00	54.87	-	-	68.2	-13.33	0	200	H
			10.001825	56.54	PK-U	37.4	0.00	-45.20	48.74	-	-	68.2	-19.46	0	200	V
	5550		17.105696	53.48	PK-U	41.4	0.00	-40.20	54.68	-	-	68.2	-13.52	0	200	V
			3.004597	59.26	PK-U	32.9	0.00	-47.90	44.26	-	-	68.2	-23.94	0	101	H
			3.010707	59.19	PK-U	32.9	0.00	-47.87	44.22	-	-	68.2	-23.98	0	101	V
			9.960002	56.57	PK-U	37.3	0.00	-45.10	48.77	-	-	68.2	-19.43	0	199	H
			16.671946	54.64	PK-U	41.0	0.00	-41.20	54.44	-	-	68.2	-13.76	0	199	H
	5670		9.956645	56.79	PK-U	37.3	0.00	-45.30	48.79	-	-	68.2	-19.41	0	199	V
			16.678955	54.97	PK-U	41.0	0.00	-41.30	54.67	-	-	68.2	-13.53	0	199	V
			3.018520	59.34	PK-U	32.9	0.00	-47.70	44.54	-	-	68.2	-23.66	0	200	H
			2.989048	59.14	PK-U	32.8	0.00	-48.10	43.84	-	-	68.2	-24.36	0	200	V
			9.976160	56.33	PK-U	37.3	0.00	-45.00	48.63	-	-	68.2	-19.57	0	101	H
	5710		17.060195	54.00	PK-U	41.4	0.00	-40.48	54.92	-	-	68.2	-13.28	0	101	H
			9.971895	56.98	PK-U	37.3	0.00	-45.30	48.98	-	-	68.2	-19.22	0	101	V
			17.063785	53.91	PK-U	41.4	0.00	-40.32	54.99	-	-	68.2	-13.21	0	200	V
			3.000853	59.52	PK-U	32.9	0.00	-48.00	44.42	-	-	68.2	-23.78	0	199	H
			2.992718	59.65	PK-U	32.8	0.00	-48.00	44.45	-	-	68.2	-23.75	0	101	V
			10.087678	56.39	PK-U	37.4	0.00	-45.23	48.56	-	-	68.2	-19.64	0	199	H
			17.290869	54.96	PK-U	41.4	0.00	-39.90	56.46	-	-	68.2	-11.74	0	199	H
			10.083992	56.35	PK-U	37.4	0.00	-45.30	48.45	-	-	68.2	-19.75	0	199	V
			17.315703	53.67	PK-U	41.4	0.00	-39.70	55.37	-	-	68.2	-12.83	0	199	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

80MHz

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT80 SU Mode	5530	6+16	* 11.040830	44.79	ADR	37.90	0.00	-45.39	37.30	54	-16.7	-	-	0	100	H
			* 11.043626	56.00	PK-U	37.90	0.00	-45.36	48.54	-	-	74	-25.46	0	201	V
			* 11.045700	56.61	PK-U	37.90	0.00	-45.32	49.19	-	-	74	-24.81	0	100	H
			* 11.078893	44.67	ADR	37.90	0.00	-44.99	37.58	54	-16.42	-	-	0	201	V
			* 16.061151	56.78	PK-U	40.50	0.00	-43.08	54.20	-	-	74	-19.8	0	100	H
			* 16.065928	44.48	ADR	40.50	0.00	-43.05	41.93	54	-12.07	-	-	0	200	V
			* 16.067581	56.24	PK-U	40.50	0.00	-43.02	53.72	-	-	74	-20.28	0	200	V
			* 16.078531	44.48	ADR	40.50	0.00	-42.91	42.07	54	-11.93	-	-	0	100	H
			* 2.265289	43.53	PK-U	31.50	0.00	-26.64	48.39	-	-	74	-25.61	0	201	V
			* 2.283731	31.69	ADR	31.60	0.00	-26.62	36.67	54	-17.33	-	-	0	201	V
			* 2.284112	43.47	PK-U	31.60	0.00	-26.62	48.45	-	-	74	-25.55	0	100	H
			* 2.284225	31.86	ADR	31.60	0.00	-26.62	36.84	54	-17.16	-	-	0	100	H
	5610		* 15.619929	52.70	PK-U	41.10	0.00	-38.90	54.90	-	-	74	-19.1	0	101	V
			* 15.619938	41.17	ADR	41.10	0.00	-38.90	43.37	54	-10.63	-	-	0	101	V
			* 15.620833	52.66	PK-U	41.10	0.00	-38.90	54.86	-	-	74	-19.14	0	200	H
			* 15.633584	41.03	ADR	41.10	0.00	-38.70	43.43	54	-10.57	-	-	0	200	H
			* 2.742990	44.04	ADR	32.80	0.00	-45.60	31.24	54	-22.76	-	-	0	101	V
			* 2.747223	55.35	PK-U	32.80	0.00	-45.70	42.45	-	-	74	-31.55	0	101	V
			* 2.786119	55.57	PK-U	32.80	0.00	-45.90	42.47	-	-	74	-31.53	0	199	H
			* 2.786326	43.80	ADR	32.80	0.00	-45.90	30.70	54	-23.3	-	-	0	199	H
			* 8.138669	51.47	PK-U	36.10	0.00	-40.30	47.27	-	-	74	-26.73	0	101	H
			* 8.157893	39.66	ADR	36.10	0.00	-40.40	35.36	54	-18.64	-	-	0	200	V
			* 8.158858	51.54	PK-U	36.10	0.00	-40.30	47.34	-	-	74	-26.66	0	200	V
			* 8.167794	39.64	ADR	36.10	0.00	-40.30	35.44	54	-18.56	-	-	0	101	H
	5690		* 8.248378	51.96	PK-U	36.00	0.00	-40.20	47.76	-	-	74	-26.24	1	101	H
			* 8.262783	40.13	ADR	36.00	0.00	-40.20	35.93	54	-18.07	-	-	1	101	H
			* 15.770239	53.28	PK-U	41.00	0.00	-40.00	54.28	-	-	74	-19.72	1	200	H
			* 15.738856	41.81	ADR	41.00	0.00	-40.00	42.81	54	-11.19	-	-	1	200	H
			* 8.256576	51.45	PK-U	36.00	0.00	-40.10	47.35	-	-	74	-26.65	1	101	V
			* 8.255051	39.89	ADR	36.00	0.00	-40.10	35.79	54	-18.21	-	-	1	101	V
			* 15.751195	54.24	PK-U	41.00	0.00	-40.00	55.24	-	-	74	-18.76	1	101	V
			* 15.740240	42.06	ADR	41.00	0.00	-40.00	43.06	54	-10.94	-	-	1	101	V
			3.177941	54.55	PK-U	34.90	0.00	-45.00	44.45	-	-	68.2	-23.75	1	101	V
			3.221171	54.35	PK-U	35.10	0.00	-44.70	44.75	-	-	68.2	-23.45	1	199	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

160MHz

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filtr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT160 SU Mode	5570	6+16	* 11.097411	56.86	PK-U	38.10	0.00	-45.08	49.88	-	-	74	-24.12	360	200	V
			* 11.113656	44.85	ADR	38.10	0.00	-45.00	37.95	54	-16.05	-	-	360	200	V
			* 11.118762	44.84	ADR	38.10	0.00	-45.01	37.93	54	-16.07	-	-	360	100	H
			* 11.120327	55.99	PK-U	38.10	0.00	-44.99	49.10	-	-	74	-24.9	360	100	H
			* 2.752098	48.03	ADR	32.00	0.00	-49.03	31.00	54	-23	-	-	360	201	V
			* 2.759991	60.18	PK-U	31.90	0.00	-49.04	43.04	-	-	74	-30.96	360	201	V
			* 2.763011	60.59	PK-U	31.90	0.00	-49.00	43.49	-	-	74	-30.51	360	100	H
			* 2.786744	47.95	ADR	32.10	0.00	-48.75	31.30	54	-22.7	-	-	360	100	H
			* 8.315805	45.23	ADR	36.20	0.00	-45.54	35.89	54	-18.11	-	-	360	100	H
			* 8.317405	45.11	ADR	36.20	0.00	-45.51	35.80	54	-18.2	-	-	360	201	V
			* 8.339205	57.00	PK-U	36.20	0.00	-45.32	47.88	-	-	74	-26.12	360	201	V
			* 8.341694	57.51	PK-U	36.20	0.00	-45.35	48.36	-	-	74	-25.64	360	100	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.1.27. 802.11be MIMO PARTIAL RU MODE IN UNII-2C BAND – SPURIOUS EMISSIONS

20MHz

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 52T - RU37	5500	6+16	* 11.007725	52.46	PK-U	37.50	-40.00	0.00	49.96	-	-	74	-24.04	0	101	V
			* 11.007746	52.37	PK-U	37.50	-40.00	0.00	49.87	-	-	74	-24.13	0	101	H
			* 11.013209	40.50	ADR	37.50	-40.20	0.00	37.80	54	-16.2	-	-	0	101	V
			* 11.018778	40.54	ADR	37.50	-40.30	0.00	37.74	54	-16.26	-	-	0	101	H
			* 2.729781	56.44	PK-U	32.80	-45.70	0.00	43.54	-	-	74	-30.46	0	101	V
			* 2.733581	44.64	ADR	32.80	-45.60	0.00	31.84	54	-22.16	-	-	0	101	V
			* 2.733628	44.54	ADR	32.80	-45.60	0.00	31.74	54	-22.26	-	-	0	101	H
			* 2.734181	56.08	PK-U	32.80	-45.60	0.00	43.28	-	-	74	-30.72	0	101	H
			16.506719	52.36	PK-U	41.70	-37.50	0.00	56.56	-	-	68.2	-11.64	0	101	H
			16.530432	52.28	PK-U	41.70	-37.80	0.00	56.18	-	-	68.2	-12.02	0	101	V
EHT20 52T - RU38	5580	6+16	* 11.147612	52.44	PK-U	37.60	-40.30	0.00	49.74	-	-	74	-24.26	0	101	H
			* 11.151274	52.10	PK-U	37.60	-40.20	0.00	49.50	-	-	74	-24.5	0	101	V
			* 11.164634	40.75	ADR	37.60	-40.00	0.00	38.35	54	-15.65	-	-	0	101	V
			* 11.166444	40.77	ADR	37.60	-40.00	0.00	38.37	54	-15.63	-	-	0	101	H
			* 2.786168	44.44	ADR	32.80	-45.90	0.00	31.34	54	-22.66	-	-	0	101	H
			* 2.788114	56.17	PK-U	32.80	-45.90	0.00	43.07	-	-	74	-30.93	0	101	H
			* 2.791615	55.87	PK-U	32.80	-45.90	0.00	42.77	-	-	74	-31.23	0	101	V
			* 2.791961	44.32	ADR	32.80	-45.90	0.00	31.22	54	-22.78	-	-	0	101	V
			16.743201	52.83	PK-U	42.40	-39.30	0.00	55.93	-	-	68.2	-12.27	0	101	H
			16.745437	53.25	PK-U	42.40	-39.20	0.00	56.45	-	-	68.2	-11.75	0	101	V
EHT20 52T - RU40	5700	6+16	* 11.381774	52.58	PK-U	38.10	-40.50	0.00	50.18	-	-	74	-23.82	1	101	H
			* 11.387184	52.71	PK-U	38.20	-40.60	0.00	50.31	-	-	74	-23.69	1	101	V
			* 11.401610	41.03	ADR	38.20	-40.60	0.00	38.63	54	-15.37	-	-	1	101	H
			* 11.418313	41.00	ADR	38.20	-40.70	0.00	38.50	54	-15.5	-	-	1	101	V
			* 2.845464	44.93	ADR	32.90	-46.10	0.00	31.73	54	-22.27	-	-	1	101	V
			* 2.846065	44.60	ADR	32.90	-46.10	0.00	31.40	54	-22.6	-	-	1	101	H
			* 2.856365	56.32	PK-U	32.90	-46.20	0.00	43.02	-	-	74	-30.98	1	101	H
			* 2.862251	56.41	PK-U	32.90	-46.20	0.00	43.11	-	-	74	-30.89	1	101	V
			17.097991	52.69	PK-U	41.70	-38.00	0.00	56.39	-	-	68.2	-11.81	1	101	V
			17.124065	52.52	PK-U	41.60	-37.50	0.00	56.62	-	-	68.2	-11.58	1	101	H
	5720		* 11.424314	53.09	PK-U	38.30	-40.60	0.00	50.79	-	-	74	-23.21	0	101	V
			* 11.441345	40.99	ADR	38.30	-40.30	0.00	38.99	54	-15.01	-	-	0	101	V
			* 11.450121	52.85	PK-U	38.30	-40.30	0.00	50.85	-	-	74	-23.15	0	101	H
			* 11.461721	40.88	ADR	38.40	-40.30	0.00	38.98	54	-15.02	-	-	0	101	H
			* 2.842839	57.17	PK-U	32.90	-46.10	0.00	43.97	-	-	74	-30.03	0	101	H
			* 2.843846	56.57	PK-U	32.90	-46.10	0.00	43.37	-	-	74	-30.63	0	101	V
			* 2.844366	44.89	ADR	32.90	-46.10	0.00	31.69	54	-22.31	-	-	0	101	H
			* 2.845552	44.94	ADR	32.90	-46.10	0.00	31.74	54	-22.26	-	-	0	101	V
			17.154179	52.65	PK-U	41.50	-38.10	0.00	56.05	-	-	68.2	-12.15	0	101	H
			17.170106	53.30	PK-U	41.50	-38.10	0.00	56.70	-	-	68.2	-11.5	0	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

80MHz

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filtr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT80 484+242T - RU91	5530	6+16	* 2.746066	43.60	PK-U	32.40	0.00	-26.03	49.97	-	-	74	-24.03	360	100	H
			* 2.747924	31.65	ADR	32.40	0.00	-26.07	37.98	54	-16.02	-	-	360	100	V
			* 2.768529	31.48	ADR	32.40	0.00	-26.10	37.78	54	-16.22	-	-	360	100	H
			* 2.777260	43.40	PK-U	32.40	0.00	-26.08	49.72	-	-	74	-24.28	360	100	V
			10.374576	57.03	PK-U	37.70	0.00	-45.43	49.30	-	-	68.2	-18.9	360	201	H
			10.391725	57.50	PK-U	37.70	0.00	-45.10	50.10	-	-	68.2	-18.1	360	100	V
			16.585118	56.34	PK-U	40.70	0.00	-43.39	53.65	-	-	68.2	-14.55	360	100	V
			16.589062	56.34	PK-U	40.70	0.00	-43.33	53.71	-	-	68.2	-14.49	360	200	H
			* 11.363130	56.10	PK-U	38.40	0.00	-44.75	49.75	-	-	74	-24.25	360	100	H
			* 11.364584	44.80	ADR	38.40	0.00	-44.76	38.44	54	-15.56	-	-	360	100	H
EHT80 484+242T - RU92	5690	6+16	* 11.365139	44.45	ADR	38.40	0.00	-44.75	38.10	54	-15.9	-	-	360	100	V
			* 11.366464	56.13	PK-U	38.40	0.00	-44.72	49.81	-	-	74	-24.19	360	100	V
			* 15.728485	56.55	PK-U	41.20	0.00	-43.67	54.08	-	-	74	-19.92	360	100	H
			* 15.729551	44.40	ADR	41.20	0.00	-43.65	41.95	54	-12.05	-	-	360	100	H
			* 15.737583	56.05	PK-U	41.20	0.00	-43.61	53.64	-	-	74	-20.36	360	100	V
			* 15.749156	44.50	ADR	41.20	0.00	-43.57	42.13	54	-11.87	-	-	360	100	V
			* 2.843238	47.71	ADR	32.40	0.00	-48.52	31.59	54	-22.41	-	-	360	100	H
			* 2.843338	47.75	ADR	32.40	0.00	-48.51	31.64	54	-22.36	-	-	360	201	V
			* 2.849438	59.37	PK-U	32.40	0.00	-48.50	43.27	-	-	74	-30.73	360	201	V
			* 2.860445	60.32	PK-U	32.40	0.00	-48.56	44.16	-	-	74	-29.84	360	100	H
EHT80 484+242T - RU93	5610	6+16	* 11.226611	56.16	PK-U	38.30	0.00	-44.48	49.98	-	-	74	-24.02	0	200	V
			* 11.241375	44.54	ADR	38.30	0.00	-44.59	38.25	54	-15.75	-	-	0	200	H
			* 11.253873	56.07	PK-U	38.40	0.00	-44.82	49.65	-	-	74	-24.35	0	200	H
			* 11.263038	44.72	ADR	38.30	0.00	-44.82	38.20	54	-15.8	-	-	0	200	V
			* 16.098582	44.91	ADR	41.00	0.00	-43.98	41.93	54	-12.07	-	-	0	200	V
			* 16.105032	56.81	PK-U	40.90	0.00	-43.89	53.82	-	-	74	-20.18	0	200	H
			* 16.114831	56.48	PK-U	40.80	0.00	-43.73	53.55	-	-	74	-20.45	0	200	V
			* 16.115450	44.79	ADR	40.80	0.00	-43.69	41.90	54	-12.1	-	-	0	200	H
			* 2.785894	48.03	ADR	32.10	0.00	-48.74	31.39	54	-22.61	-	-	0	201	V
			* 2.789454	59.79	PK-U	32.10	0.00	-48.74	43.15	-	-	74	-30.85	0	201	V
			* 2.790822	59.62	PK-U	32.20	0.00	-48.73	43.09	-	-	74	-30.91	0	100	H
			* 2.794409	48.23	ADR	32.20	0.00	-48.74	31.69	54	-22.31	-	-	0	100	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

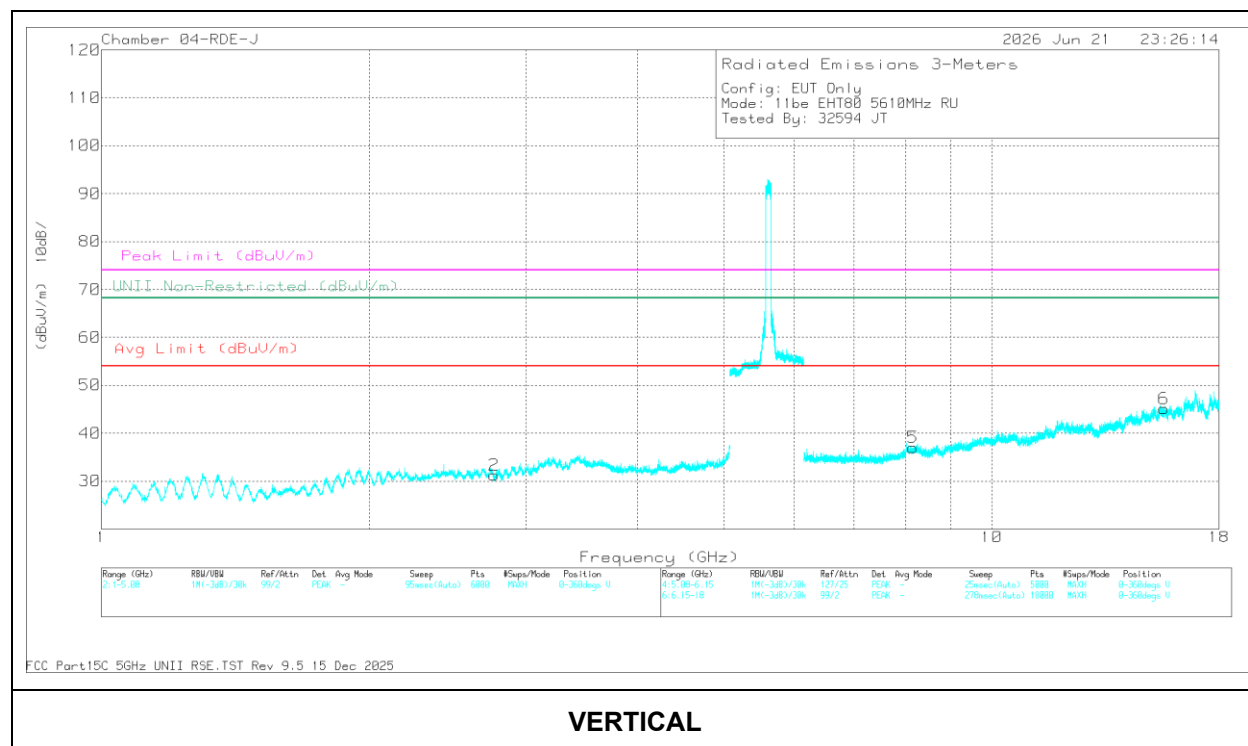
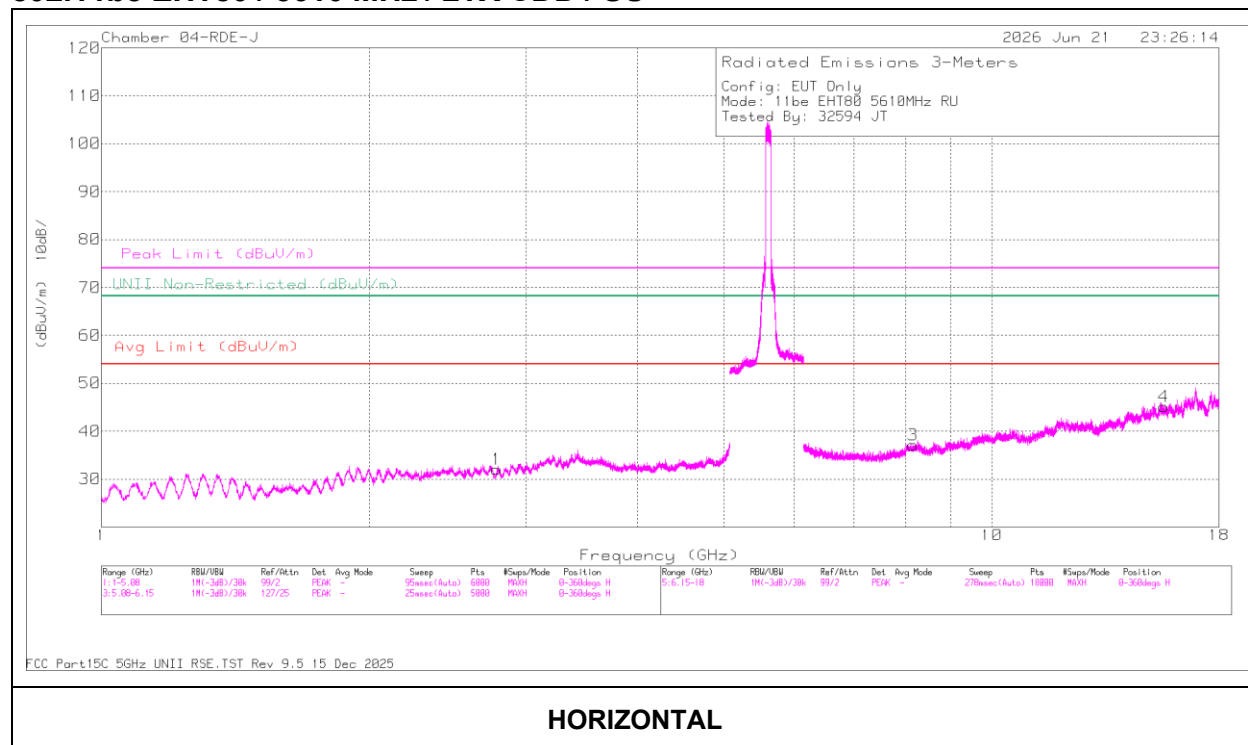
160MHz

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filtr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT160 996+484T - RU95	5570	6+16	* 11.150082	57.20	PK-U	38.20	0.00	-45.00	50.40	-	-	74	-23.6	0	201	V
			* 11.153498	44.81	ADR	38.20	0.00	-44.99	38.02	54	-15.98	-	-	0	100	H
			* 11.155511	56.66	PK-U	38.20	0.00	-44.97	49.89	-	-	74	-24.11	0	100	H
			* 11.156185	44.78	ADR	38.20	0.00	-44.97	38.01	54	-15.99	-	-	0	201	V
			* 15.805564	57.56	PK-U	41.20	0.00	-43.54	55.22	-	-	74	-18.78	0	200	V
			* 15.836432	56.96	PK-U	41.10	0.00	-43.58	54.48	-	-	74	-19.52	0	100	H
			* 15.839054	44.34	ADR	41.20	0.00	-43.51	42.03	54	-11.97	-	-	0	100	H
			* 15.840209	44.68	ADR	41.20	0.00	-43.51	42.37	54	-11.63	-	-	0	200	V
			* 2.753258	48.10	ADR	32.00	0.00	-49.03	31.07	54	-22.93	-	-	0	201	V
			* 2.759358	60.11	PK-U	31.90	0.00	-49.02	42.99	-	-	74	-31.01	0	201	V
			* 2.789246	60.48	PK-U	32.10	0.00	-48.74	43.84	-	-	74	-30.16	0	100	H
			* 2.793959	48.05	ADR	32.20	0.00	-48.74	31.51	54	-22.49	-	-	0	100	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

WORST-CASE HARMONICS AND SPURIOUS EMISSIONS**802.11be EHT80 / 5610 MHz / 2TX CDD / SU**

Radiated Emissions

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filt/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
6	* 15.619929	52.70	PK-U	41.1	-38.90	0.00	54.90	-	-	74	-19.1	0	101	V
6	* 15.619938	41.17	ADR	41.1	-38.90	0.00	43.37	54	-10.63	-	-	0	101	V
4	* 15.620833	52.66	PK-U	41.1	-38.90	0.00	54.86	-	-	74	-19.14	0	200	H
4	* 15.633584	41.03	ADR	41.1	-38.70	0.00	43.43	54	-10.57	-	-	0	200	H
2	* 2.742990	44.04	ADR	32.8	-45.60	0.00	31.24	54	-22.76	-	-	0	101	V
2	* 2.747223	55.35	PK-U	32.8	-45.70	0.00	42.45	-	-	74	-31.55	0	101	V
1	* 2.786119	55.57	PK-U	32.8	-45.90	0.00	42.47	-	-	74	-31.53	0	199	H
1	* 2.786326	43.80	ADR	32.8	-45.90	0.00	30.70	54	-23.3	-	-	0	199	H
3	* 8.138669	51.47	PK-U	36.1	-40.30	0.00	47.27	-	-	74	-26.73	0	101	H
5	* 8.157893	39.66	ADR	36.1	-40.40	0.00	35.36	54	-18.64	-	-	0	200	V
5	* 8.158858	51.54	PK-U	36.1	-40.30	0.00	47.34	-	-	74	-26.66	0	200	V
3	* 8.167794	39.64	ADR	36.1	-40.30	0.00	35.44	54	-18.56	-	-	0	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.1.28. 802.11n/ac SISO MODE IN UNII-3 BAND BANDEDGE

UNII-3 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	ACF (dB/m)	Amp/Cbl/ Filt/Pad (dB)	Conversi on Factor (dB)	DCCF (dB)	Correct Reading EIRP (dBm)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
HT20	5745	6	5.725000	-29.88	Pk	34.70	-33.30	11.80	0.00	-16.68	27	-43.68	177	307	H
			5.638989	-51.58	Pk	34.60	-33.40	11.80	0.00	-38.58	-27	-11.58	177	307	H
			5.725000	-26.60	Pk	34.70	-33.30	11.80	0.00	-13.40	27	-40.4	199	307	V
			5.634245	-52.25	Pk	34.60	-33.40	11.80	0.00	-39.25	-27	-12.25	199	307	V
			5.725000	-21.51	Pk	34.50	-34.10	11.80	0.00	-9.31	27	-36.31	311	229	H
		16	5.649784	-49.41	Pk	34.30	-34.11	11.80	0.00	-37.42	-27	-10.42	311	229	H
			5.725000	-35.07	Pk	34.50	-34.10	11.80	0.00	-22.87	27	-49.87	255	225	V
			5.633667	-50.36	Pk	34.30	-34.22	11.80	0.00	-38.48	-27	-11.48	255	225	V
			5.850000	-40.34	Pk	35.00	-33.20	11.80	0.00	-26.74	27	-53.74	185	387	H
			5.997669	-52.96	Pk	35.20	-32.90	11.80	0.00	-38.86	-27	-11.86	185	387	H
	5825	6	5.850000	-38.09	Pk	35.00	-33.20	11.80	0.00	-24.49	27	-51.49	253	119	V
			5.968077	-52.51	Pk	35.10	-33.00	11.80	0.00	-38.61	-27	-11.61	253	119	V
			5.850000	-35.19	Pk	35.00	-31.62	11.80	0.00	-20.01	27	-47.01	328	231	H
		16	5.927100	-49.51	Pk	35.30	-31.40	11.80	0.00	-33.81	-27	-6.81	328	231	H
			5.850000	-45.11	Pk	35.00	-31.62	11.80	0.00	-29.93	27	-56.93	269	202	V
			5.955900	-49.58	Pk	35.30	-31.40	11.80	0.00	-33.88	-27	-6.88	269	202	V
HT40	5755	6	5.725000	-28.55	Pk	34.60	-30.20	11.80	0.00	-12.35	27	-39.35	346	379	H
			5.646171	-53.28	Pk	34.50	-30.30	11.80	0.00	-37.28	-27	-10.28	346	379	H
			5.725000	-33.84	Pk	34.60	-30.20	11.80	0.00	-17.64	27	-44.64	292	272	V
			5.626275	-54.54	Pk	34.50	-30.40	11.80	0.00	-38.64	-27	-11.64	292	272	V
			5.725000	-42.90	Pk	34.50	-17.00	11.80	0.00	-13.60	27	-40.6	336	207	H
		16	5.637714	-66.62	Pk	34.30	-17.00	11.80	0.00	-37.52	-27	-10.52	336	207	H
			5.725000	-54.29	Pk	34.50	-17.00	11.80	0.00	-24.99	27	-51.99	274	206	V
			5.636607	-66.97	Pk	34.30	-17.00	11.80	0.00	-37.87	-27	-10.87	274	206	V
			5.850000	-46.89	Pk	35.00	-30.00	11.80	0.00	-30.09	27	-57.09	86	222	H
			5.997782	-54.78	Pk	35.50	-29.70	11.80	0.00	-37.18	-27	-10.18	86	222	H
	5795	6	5.850000	-52.93	Pk	35.00	-30.00	11.80	0.00	-36.13	27	-63.13	216	215	V
			5.959104	-54.58	Pk	35.40	-29.80	11.80	0.00	-37.18	-27	-10.18	216	215	V
			5.850000	-66.83	Pk	34.90	-16.00	11.80	0.00	-36.13	27	-63.13	334	154	H
			5.954491	-67.33	Pk	35.20	-16.00	11.80	0.00	-36.33	-27	-9.33	334	154	H
			5.850000	-69.07	Pk	34.90	-16.00	11.80	0.00	-38.37	27	-65.37	269	222	V
		16	5.977754	-67.38	Pk	35.20	-16.10	11.80	0.00	-36.48	-27	-9.48	269	222	V
			5.725000	-31.84	Pk	34.60	-30.20	11.80	0.00	-15.64	27	-42.64	331	348	H
			5.648590	-48.43	Pk	34.50	-30.30	11.80	0.00	-32.43	-27	-5.43	331	348	H
			5.725000	-37.18	Pk	34.60	-30.20	11.80	0.00	-20.98	27	-47.98	286	126	V
			5.650203	-52.78	Pk	34.50	-30.30	11.80	0.00	-36.78	-26.85	-9.93	286	126	V
VHT80	5775 (Lower)	6	5.725000	-26.31	Pk	34.70	-31.75	11.80	0.00	-11.56	27	-38.56	330	239	H
			5.650201	-46.13	Pk	34.70	-31.82	11.80	0.00	-31.45	-26.85	-4.6	330	239	H
			5.725000	-37.85	Pk	34.70	-31.75	11.80	0.00	-23.10	27	-50.1	271	205	V
			5.639750	-50.37	Pk	34.70	-31.89	11.80	0.00	-35.76	-27	-8.76	271	205	V
		16	5.850000	-38.47	Pk	35.00	-30.00	11.80	0.00	-21.67	27	-48.67	96	213	H
			5.927966	-52.41	Pk	35.40	-29.90	11.80	0.00	-35.11	-27	-8.11	96	213	H
			5.850000	-44.32	Pk	35.00	-30.00	11.80	0.00	-27.52	27	-54.52	223	250	V
			5.955026	-54.13	Pk	35.40	-29.90	11.80	0.00	-36.83	-27	-9.83	223	250	V
	5775 (Upper)	6	5.850000	-32.44	Pk	35.00	-31.62	11.80	0.00	-17.26	27	-44.26	331	221	H
			5.933350	-49.10	Pk	35.30	-31.39	11.80	0.00	-33.39	-27	-6.39	331	221	H
			5.850000	-43.17	Pk	35.00	-31.62	11.80	0.00	-27.99	27	-54.99	272	203	V
		16	5.958600	-49.99	Pk	35.30	-31.41	11.80	0.00	-34.30	-27	-7.3	272	203	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.29. 802.11n/ac MIMO MODE IN UNII-3 BAND - BANDEDGE

UNII-3 (MIMO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	ACF (dB/m)	Amp/Cbl/ Filt/Pad (dB)	Conversi on Factor (dB)	DCCF (dB)	Correct Reading EIRP (dBm)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
HT20	5745	6+16	5.725000	-19.94	Pk	34.70	-31.75	11.80	0.00	-5.19	27	-32.19	240	220	H
			5.630800	-49.58	Pk	34.70	-31.87	11.80	0.00	-34.95	-27	-7.95	240	220	H
			5.725000	-31.29	Pk	34.70	-31.75	11.80	0.00	-16.54	27	-43.54	106	163	V
			5.628200	-49.83	Pk	34.70	-31.91	11.80	0.00	-35.24	-27	-8.24	106	163	V
			5.850000	-33.72	Pk	35.00	-31.62	11.80	0.00	-18.54	27	-45.54	171	233	H
	5825		5.971725	-49.47	Pk	35.30	-31.34	11.80	0.00	-33.71	-27	-6.71	171	233	H
			5.850000	-39.62	Pk	35.00	-31.62	11.80	0.00	-24.44	27	-51.44	124	277	V
			5.932300	-49.85	Pk	35.30	-31.38	11.80	0.00	-34.13	-27	-7.13	124	277	V
			HT40	5755	5.725000	-27.47	Pk	34.70	-33.90	11.80	0.00	-14.87	27	-41.87	171
5.645140	-51.28	Pk			34.60	-33.90	11.80	0.00	-38.78	-27	-11.78	171	371	H	
5.725000	-20.90	Pk			34.70	-33.90	11.80	0.00	-8.30	27	-35.3	245	187	V	
5.649621	-49.64	Pk			34.60	-34.00	11.80	0.00	-37.24	-27	-10.24	245	187	V	
5.850000	-48.07	Pk			35.00	-33.70	11.80	0.00	-34.97	27	-61.97	194	398	H	
5795	5.948106	-52.36		Pk	35.10	-33.60	11.80	0.00	-39.06	-27	-12.06	194	398	H	
	5.850000	-41.19		Pk	35.00	-33.70	11.80	0.00	-28.09	27	-55.09	246	222	V	
	5.980510	-51.50		Pk	35.20	-33.60	11.80	0.00	-38.10	-27	-11.1	246	222	V	
	VHT80	5775 (Lower)		5.652184	-38.23	Pk	34.20	-37.78	11.80	0.00	-30.01	-25.38	-4.63	266	164
5.725000			-26.64	Pk	34.40	-37.60	11.80	0.00	-18.04	27	-45.04	266	164	H	
5.638584			-46.04	Pk	34.20	-37.80	11.80	0.00	-37.84	-27	-10.84	52	285	V	
5.725000			-29.65	Pk	34.40	-37.60	11.80	0.00	-21.05	27	-48.05	52	285	V	
5.850000			-46.21	Pk	34.90	-16.00	11.80	0.00	-15.51	27	-42.51	334	182	H	
5775 (Upper)		5.929541	-65.67	Pk	35.10	-15.90	11.80	0.00	-34.67	-27	-7.67	334	182	H	
		5.850000	-57.27	Pk	34.90	-16.00	11.80	0.00	-26.57	27	-53.57	286	167	V	
		5.997219	-66.84	Pk	35.20	-16.20	11.80	0.00	-36.04	-27	-9.04	286	167	V	

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.30. 802.11be SISO SU MODE IN UNII-3 BAND - BANDEDGE

UNII-3 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	ACF (dB/m)	Amp/Cbl/ Filt/Pad (dB)	Conversi on Factor (dB)	DCCF (dB)	Correct Reading EIRP (dBm)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 SU Mode	5745	6	5.725000	-45.44	Pk	34.50	-17.00	11.80	0.00	-16.14	27	-43.14	81	192	H
			5.632651	-67.26	Pk	34.30	-17.00	11.80	0.00	-38.16	-27	-11.16	81	192	H
			5.725000	-50.55	Pk	34.50	-17.00	11.80	0.00	-21.25	27	-48.25	286	140	V
			5.641446	-66.62	Pk	34.30	-17.10	11.80	0.00	-37.62	-27	-10.62	286	140	V
		16	5.725000	-25.07	Pk	34.80	-33.30	11.80	0.00	-11.77	27	-38.77	168	218	H
			5.645102	-53.50	Pk	34.70	-33.50	11.80	0.00	-40.50	-27	-13.5	168	218	H
			5.725000	-35.70	Pk	34.80	-33.30	11.80	0.00	-22.40	27	-49.4	117	165	V
			5.641127	-54.86	Pk	34.70	-33.50	11.80	0.00	-41.86	-27	-14.86	117	165	V
	5825	6	5.850000	-51.58	Pk	34.90	-16.00	11.80	0.00	-20.88	27	-47.88	87	223	H
			5.975419	-66.94	Pk	35.20	-16.10	11.80	0.00	-36.04	-27	-9.04	87	223	H
			5.850000	-57.27	Pk	34.90	-16.00	11.80	0.00	-26.57	27	-53.57	278	132	V
			5.981101	-65.98	Pk	35.20	-16.10	11.80	0.00	-35.08	-27	-8.08	278	132	V
		16	5.850000	-39.20	Pk	35.00	-33.10	11.80	0.00	-25.50	27	-52.5	346	125	H
			5.959020	-63.69	Pk	35.30	-32.90	11.80	0.00	-49.49	-27	-22.49	346	125	H
			5.850000	-55.41	Pk	35.00	-33.10	11.80	0.00	-41.71	27	-68.71	253	106	V
			5.955476	-64.61	Pk	35.20	-32.90	11.80	0.00	-50.51	-27	-23.51	253	106	V
EHT40 SU Mode	5755	6	5.725000	-24.19	Pk	35.00	-36.70	11.80	0.00	-14.09	27	-41.09	89	236	H
			5.625517	-47.91	Pk	35.20	-37.15	11.80	0.00	-38.06	-27	-11.06	89	236	H
			5.725000	-29.30	Pk	35.00	-36.70	11.80	0.00	-19.20	27	-46.2	274	134	V
			5.648250	-48.36	Pk	35.10	-37.03	11.80	0.00	-38.49	-27	-11.49	274	134	V
		16	5.725000	-14.75	Pk	34.70	-38.60	11.80	0.00	-6.85	27	-33.85	326	118	H
			5.652284	-40.15	Pk	34.60	-38.83	11.80	0.00	-32.58	-25.31	-7.27	326	118	H
			5.725000	-26.93	Pk	34.70	-38.60	11.80	0.00	-19.03	27	-46.03	266	187	V
			5.626200	-46.71	Pk	34.60	-38.92	11.80	0.00	-39.23	-27	-12.23	266	187	V
	5795	6	5.850000	-36.52	Pk	35.10	-35.60	11.80	0.00	-25.22	27	-52.22	78	226	H
			5.931875	-48.59	Pk	35.20	-36.21	11.80	0.00	-37.80	-27	-10.8	78	226	H
			5.850000	-47.27	Pk	35.10	-35.60	11.80	0.00	-35.97	27	-62.97	275	122	V
			5.979550	-48.77	Pk	35.30	-36.20	11.80	0.00	-37.87	-27	-10.87	275	122	V
		16	5.850000	-32.29	Pk	35.00	-38.30	11.80	0.00	-23.79	27	-50.79	318	246	H
			5.948730	-46.18	Pk	35.20	-38.03	11.80	0.00	-37.21	-27	-10.21	318	246	H
			5.850000	-40.90	Pk	35.00	-38.30	11.80	0.00	-32.40	27	-59.4	266	174	V
			5.966490	-47.22	Pk	35.20	-38.00	11.80	0.00	-38.22	-27	-11.22	266	174	V
EHT80 SU Mode	5775 (Lower)	6	5.725000	-24.90	Pk	35.00	-36.70	11.80	0.00	-14.80	27	-41.8	81	236	H
			5.645134	-44.39	Pk	35.10	-37.01	11.80	0.00	-34.50	-27	-7.5	81	236	H
			5.725000	-31.79	Pk	35.00	-36.70	11.80	0.00	-21.69	27	-48.69	279	128	V
			5.648317	-45.63	Pk	35.10	-37.03	11.80	0.00	-35.76	-27	-8.76	279	128	V
		16	5.725000	-24.52	Pk	35.00	-36.70	11.80	0.00	-14.42	27	-41.42	74	219	H
			5.647684	-42.73	Pk	35.10	-37.03	11.80	0.00	-32.86	-27	-5.86	74	219	H
			5.725000	-29.76	Pk	35.00	-36.70	11.80	0.00	-19.66	27	-46.66	281	118	V
			5.649751	-46.02	Pk	35.10	-37.10	11.80	0.00	-36.22	-27	-9.22	281	118	V
	5775 (Upper)	6	5.850000	-32.40	Pk	35.10	-34.85	11.80	0.00	-20.35	27	-47.35	12	288	H
			5.942760	-48.76	Pk	35.30	-34.72	11.80	0.00	-36.38	-27	-9.38	12	288	H
			5.850000	-37.42	Pk	35.10	-34.85	11.80	0.00	-25.37	27	-52.37	313	273	V
			5.938350	-49.54	Pk	35.30	-34.70	11.80	0.00	-37.14	-27	-10.14	313	273	V
		16	5.850000	-31.55	Pk	35.10	-34.85	11.80	0.00	-19.50	27	-46.5	5	284	H
			5.932020	-48.80	Pk	35.30	-34.74	11.80	0.00	-36.44	-27	-9.44	5	284	H
			5.850000	-40.42	Pk	35.10	-34.85	11.80	0.00	-28.37	27	-55.37	308	269	V
			5.974350	-49.24	Pk	35.3	-34.90	11.80	0	-37.04	-27	-10.04	308	269	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.31. 802.11be SISO PARTIAL RU MODE IN UNII-3 BAND – BANDEDGE

UNII-3 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	ACF (dB/m)	Amp/Cbl/ Filt/Pad (dB)	Conversi on Factor (dB)	DCCF (dB)	Correct Reading EIRP (dBm)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 26T - RU0	5745	6	5.725000	-57.62	Pk	34.50	-17.00	11.80	0.00	-28.32	27.00	-55.32	81.00	149	H
			5.628919	-67.50	Pk	34.30	-17.00	11.80	0.00	-38.40	-27.00	-11.4	81.00	149	H
			5.725000	-66.43	Pk	34.50	-17.00	11.80	0.00	-37.13	27.00	-64.13	289.00	143	V
			5.640489	-66.19	Pk	34.30	-17.10	11.80	0.00	-37.19	-27.00	-10.19	289.00	143	V
			5.725000	-50.61	Pk	34.80	-33.30	11.80	0.00	-37.31	27.00	-64.31	338.00	103	H
		16	5.648778	-63.86	Pk	34.70	-33.50	11.80	0.00	-50.86	-27.00	-23.86	338.00	103	H
			5.725000	-62.23	Pk	34.80	-33.30	11.80	0.00	-48.93	27.00	-75.93	326.00	397	V
			5.647277	-64.16	Pk	34.70	-33.50	11.80	0.00	-51.16	-27.00	-24.16	326.00	397	V
			5.850000	-64.44	Pk	34.90	-16.00	11.80	0.00	-33.74	27.00	-60.74	88.00	223	H
			5.955419	-66.82	Pk	35.20	-16.00	11.80	0.00	-35.82	-27.00	-8.82	88.00	223	H
EHT20 26T - RU8	5825	6	5.850000	-68.77	Pk	34.90	-16.00	11.80	0.00	-38.07	27.00	-65.07	277.00	131	V
			5.992381	-66.90	Pk	35.20	-16.10	11.80	0.00	-36.00	-27.00	-9	277.00	131	V
			5.850000	-60.08	Pk	35.00	-33.10	11.80	0.00	-46.38	27.00	-73.38	346.00	125	H
		16	5.975532	-63.17	Pk	35.30	-32.90	11.80	0.00	-48.97	-27.00	-21.97	346.00	125	H
			5.850000	-65.83	Pk	35.00	-33.10	11.80	0.00	-52.13	27.00	-79.13	253.00	106	V
			5.960398	-64.27	Pk	35.30	-32.90	11.80	0.00	-50.07	-27.00	-23.07	253.00	106	V
		6	5.725000	-30.77	Pk	35.10	-35.06	11.80	0.00	-18.93	27	-45.93	96	118	H
			5.650884	-46.86	Pk	35.00	-35.10	11.80	0.00	-35.16	-26.35	-8.81	96	118	H
			5.725000	-38.11	Pk	35.10	-35.06	11.80	0.00	-26.27	27	-53.27	295	273	V
			5.625017	-49.39	Pk	35.00	-34.99	11.80	0.00	-37.58	-27	-10.58	295	273	V
EHT80 484+242T - RU93	5775 (Lower)	6	5.725000	-28.10	Pk	35.10	-35.06	11.80	0.00	-16.26	27	-43.26	328	102	H
			5.646167	-47.31	Pk	35.00	-35.08	11.80	0.00	-35.59	-27	-8.59	328	102	H
			5.725000	-44.28	Pk	35.10	-35.06	11.80	0.00	-32.44	27	-59.44	232	388	V
			5.638100	-49.37	Pk	35.00	-35.09	11.80	0.00	-37.66	-27	-10.66	232	388	V
		16	5.850000	-38.93	Pk	35.10	-34.85	11.80	0.00	-26.88	27	-53.88	16	294	H
			5.948610	-49.38	Pk	35.30	-34.74	11.80	0.00	-37.02	-27	-10.02	16	294	H
			5.850000	-43.66	Pk	35.10	-34.85	11.80	0.00	-31.61	27	-58.61	311	286	V
			5.972370	-48.83	Pk	35.30	-34.88	11.80	0.00	-36.61	-27	-9.61	311	286	V
			5.850000	-34.86	Pk	35.10	-34.85	11.80	0.00	-22.81	27	-49.81	320	208	H
			5.940810	-48.62	Pk	35.30	-34.69	11.80	0.00	-36.21	-27	-9.21	320	208	H
EHT80 484+242T - RU90	5775 (Upper)	6	5.850000	-43.75	Pk	35.10	-34.85	11.80	0.00	-31.70	27	-58.7	269	171	V
			5.965950	-49.42	Pk	35.30	-34.83	11.80	0.00	-37.15	-27	-10.15	269	171	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.32. 802.11be MIMO SU MODE IN UNII-3 BAND - BANDEDGE

UNII-3 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	ACF (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	Conversi on Factor (dB)	DCCF (dB)	Correct Reading EIRP (dBm)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 SU Mode	5745	6+16	5.725000	-15.16	Pk	35.10	-37.50	11.80	0.00	-5.76	27.00	-32.76	88	242	H
			5.648784	-46.17	Pk	35.00	-37.80	11.80	0.00	-37.17	-27.00	-10.17	88	242	H
			5.725000	-25.53	Pk	35.10	-37.50	11.80	0.00	-16.13	27.00	-43.13	33	162	V
			5.645984	-48.02	Pk	34.90	-37.80	11.80	0.00	-39.12	-27.00	-12.12	33	162	V
			5.850000	-24.17	Pk	34.90	-36.40	11.80	0.00	-13.87	27.00	-40.87	231	142	H
	5825	6+16	5.967150	-47.76	Pk	35.30	-36.20	11.80	0.00	-36.86	-27.00	-9.86	231	142	H
			5.850000	-33.82	Pk	34.90	-36.40	11.80	0.00	-23.52	27.00	-50.52	132	277	V
			5.953950	-48.04	Pk	35.30	-36.20	11.80	0.00	-37.14	-27.00	-10.14	132	277	V
			5.725000	-16.33	Pk	35.00	-36.70	11.80	0.00	-6.23	27.00	-33.23	312	225	H
			5.649450	-44.19	Pk	35.10	-37.10	11.80	0.00	-34.39	-27.00	-7.39	312	225	H
EHT40 SU Mode	5755	6+16	5.725000	-27.66	Pk	35.00	-36.70	11.80	0.00	-17.56	27.00	-44.56	312	225	V
			5.645300	-47.94	Pk	35.10	-37.03	11.80	0.00	-38.07	-27.00	-11.07	312	225	V
			5.850000	-34.32	Pk	35.10	-35.60	11.80	0.00	-23.02	27.00	-50.02	324	229	H
			5.938650	-48.26	Pk	35.20	-36.20	11.80	0.00	-37.46	-27.00	-10.46	324	229	H
			5.850000	-43.54	Pk	35.10	-35.60	11.80	0.00	-32.24	27.00	-59.24	278	151	V
	5795	6+16	5.981525	-48.66	Pk	35.30	-36.20	11.80	0.00	-37.76	-27.00	-10.76	278	151	V
			5.725000	-26.54	Pk	34.50	-34.41	11.80	0.00	-14.65	27	-41.65	2	102	H
			5.645667	-44.15	Pk	34.50	-34.52	11.80	0.00	-32.37	-27	-5.37	2	102	H
			5.725000	-35.20	Pk	34.50	-34.41	11.80	0.00	-23.31	27	-50.31	203	145	V
			5.649984	-50.32	Pk	34.60	-34.51	11.80	0.00	-38.43	-27	-11.43	203	145	V
EHT80 SU Mode	5775 (Lower)	6+16	5.850000	-24.92	Pk	34.90	-34.40	11.80	0.00	-12.62	27.00	-39.62	98	211	H
			5.929620	-44.76	Pk	35.10	-34.35	11.80	0.00	-32.21	-27.00	-5.21	98	211	H
			5.850000	-36.81	Pk	34.90	-34.40	11.80	0.00	-24.51	27.00	-51.51	56	135	V
	5775 (Upper)	6+16	5.939010	-48.89	Pk	35.10	-34.34	11.80	0.00	-36.33	-27.00	-9.33	56	135	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

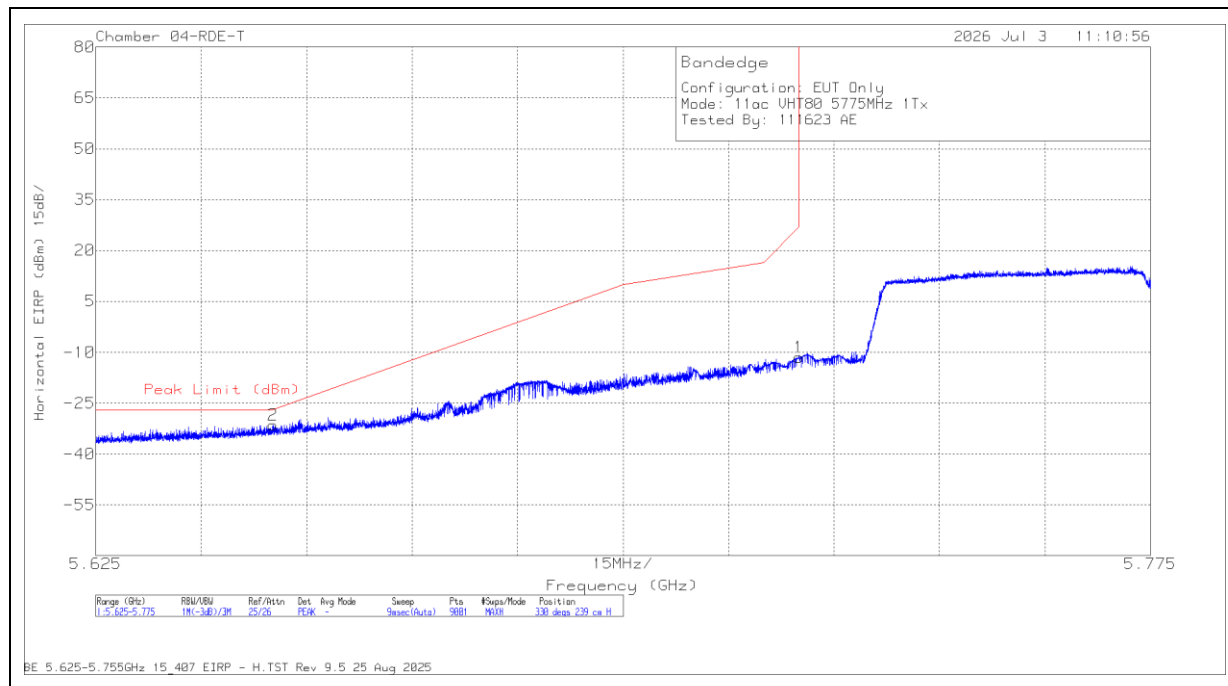
1.1.33. 802.11be MIMO PARTIAL RU MODE IN UNII-3 BAND - BANDEDGE

UNII-3 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	ACF (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	Conversi on Factor (dB)	DCCF (dB)	Correct Reading EIRP (dBm)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 26T - RU0	5745	6+16	5.725000	-31.33	Pk	35.10	-35.06	11.80	0.00	-19.49	27.00	-46.49	321	219	H
			5.636767	-47.82	Pk	35.00	-35.07	11.80	0.00	-36.09	-27.00	-9.09	321	219	H
			5.725000	-39.13	Pk	35.10	-35.06	11.80	0.00	-27.29	27.00	-54.29	328	184	V
			5.625483	-49.10	Pk	35.00	-34.99	11.80	0.00	-37.29	-27.00	-10.29	328	184	V
EHT20 26T - RU8	5825	6+16	5.850000	-43.18	Pk	35.10	-34.85	11.80	0.00	-31.13	27.00	-58.13	324	232	H
			5.928900	-48.98	Pk	35.30	-34.74	11.80	0.00	-36.62	-27.00	-9.62	324	232	H
			5.850000	-52.46	Pk	35.10	-34.85	11.80	0.00	-40.41	27.00	-67.41	275	184	V
			5.930160	-49.56	Pk	35.30	-34.75	11.80	0.00	-37.21	-27.00	-10.21	275	184	V
EHT80 484+242T - RU93	5775 (Lower)	6+16	5.725000	-29.22	Pk	34.50	-34.41	11.80	0.00	-17.33	27	-44.33	99	198	H
			5.643750	-46.33	Pk	34.50	-34.53	11.80	0.00	-34.56	-27	-7.56	99	198	H
			5.725000	-39.76	Pk	34.50	-34.41	11.80	0.00	-27.87	27	-54.87	56	386	V
			5.635417	-49.19	Pk	34.60	-34.55	11.80	0.00	-37.34	-27	-10.34	56	386	V
EHT80 484+242T - RU90	5775 (Upper)	6+16	5.850000	-41.70	Pk	34.90	-34.40	11.80	0.00	-29.40	27.00	-56.4	228	152	H
			5.961540	-50.03	Pk	35.20	-34.31	11.80	0.00	-37.34	-27.00	-10.34	228	152	H
			5.850000	-44.09	Pk	34.90	-34.40	11.80	0.00	-31.79	27.00	-58.79	63	161	V
			5.962380	-50.18	Pk	35.20	-34.31	11.80	0.00	-37.49	-27.00	-10.49	63	161	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

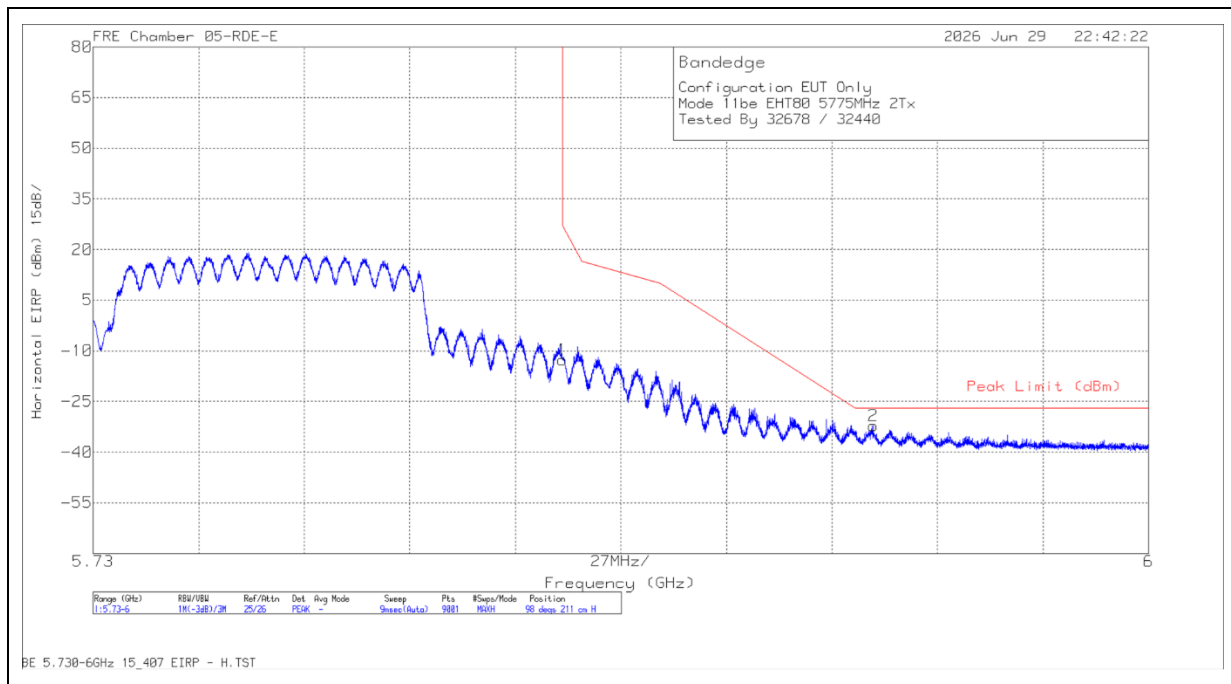
WORST-CASE BANDEDGE (LOW CHANNEL)**802.11ac VHT80 / 5775 MHz / SISO 1TX****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Amp/Cbl/Filtr/Pad (dB)	Correct Reading (dBm)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725000	-26.31	Pk	34.70	11.80	0.00	-31.75	-11.56	27	-38.56	330	239	H
2	5.650201	-46.13	Pk	34.70	11.80	0.00	-31.82	-31.45	-26.85	-4.6	330	239	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

WORST-CASE BANDEDGE (HIGH CHANNEL)**802.11be EHT80 / 5775 MHz / MIMO 2TX SU****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Amp/Cbl/Filtr/Pad (dB)	Correct Reading (dBm)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.850000	-24.92	Pk	34.90	11.80	0.00	-34.40	-12.62	27	-39.62	98	211	H
2	5.929620	-44.76	Pk	35.10	11.80	0.00	-34.35	-32.21	-27	-5.21	98	211	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.34. 802.11n/ac MIMO MODE IN UNII-3 BAND – SPURIOUS EMISSIONS

20MHz

UNII-3 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Filt/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11n	5745	6 + 16	1.974983	57.55	PK-U	31.40	-46.52	0.00	42.43	-	-	68.2	-25.77	0	200	V
			1.982634	57.16	PK-U	31.40	-46.53	0.00	42.03	-	-	68.2	-26.17	0	101	H
			7.064587	53.67	PK-U	35.60	-43.72	0.00	45.55	-	-	68.2	-22.65	0	200	H
			7.092980	53.23	PK-U	35.60	-43.58	0.00	45.25	-	-	68.2	-22.95	0	101	V
	5785		16.785547	55.48	PK-U	41.70	-41.50	0.00	55.68	-	-	68.2	-12.52	0	101	V
			16.802621	54.62	PK-U	41.70	-41.50	0.00	54.82	-	-	68.2	-13.38	0	200	H
			* 11.563912	44.11	ADR	38.40	-44.48	0.00	38.03	54	-15.97	-	-	0	201	V
			* 11.566990	55.70	PK-U	38.40	-44.47	0.00	49.63	-	-	74	-24.37	0	201	V
			* 11.578100	55.52	PK-U	38.40	-44.56	0.00	49.36	-	-	74	-24.64	0	100	H
			* 11.587355	44.21	ADR	38.40	-44.73	0.00	37.88	54	-16.12	-	-	0	100	H
			* 2.875011	42.86	PK-U	32.50	-25.85	0.00	49.51	-	-	74	-24.49	0	100	H
			* 2.882782	42.65	PK-U	32.50	-25.85	0.00	49.30	-	-	74	-24.7	0	201	V
			* 2.896799	31.26	ADR	32.50	-25.71	0.00	38.05	54	-15.95	-	-	0	100	H
			17.357911	56.22	PK-U	40.40	-42.01	0.00	54.61	-	-	68.2	-13.59	0	200	V
			17.359476	56.05	PK-U	40.40	-41.99	0.00	54.46	-	-	68.2	-13.74	0	100	H
	5825		* 11.644491	56.18	PK-U	38.50	-44.76	0.00	49.92	-	-	74	-24.08	0	201	V
			* 11.652850	56.61	PK-U	38.50	-44.78	0.00	50.33	-	-	74	-23.67	0	100	H
			* 11.657962	44.70	ADR	38.50	-44.83	0.00	38.37	54	-15.63	-	-	0	201	V
			* 11.669866	44.58	ADR	38.50	-44.76	0.00	38.32	54	-15.68	-	-	0	100	H
			* 2.897001	43.24	PK-U	32.50	-25.71	0.00	50.03	-	-	74	-23.97	0	100	H
			17.475377	55.22	PK-U	40.60	-41.98	0.00	53.84	-	-	68.2	-14.36	0	200	V
			17.481273	55.38	PK-U	40.60	-42.01	0.00	53.97	-	-	68.2	-14.23	0	100	H
			2.930336	43.38	PK-U	32.60	-25.85	0.00	50.13	-	-	68.2	-18.07	0	201	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

40MHz

UNII-3 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11n	5755	6 + 16	* 13.393921	51.46	PK-U	39.20	-38.80	0.00	51.86	-	-	74	-22.14	0	200	V
			* 2.287978	47.44	ADR	31.80	-48.30	0.00	30.94	54	-23.06	-	-	0	199	H
			* 2.289365	59.42	PK-U	31.80	-48.30	0.00	42.92	-	-	74	-31.08	0	199	H
			* 2.289732	47.44	ADR	31.80	-48.30	0.00	30.94	54	-23.06	-	-	0	101	V
			* 2.293418	59.59	PK-U	31.80	-48.30	0.00	43.09	-	-	74	-30.91	0	101	V
			13.409708	51.56	PK-U	39.20	-38.90	0.00	51.86	-	-	68.2	-16.34	0	199	H
			8.559537	53.20	PK-U	36.00	-41.90	0.00	47.30	-	-	68.2	-20.9	0	101	V
			8.560240	53.71	PK-U	36.00	-41.90	0.00	47.81	-	-	68.2	-20.39	0	101	H
	5795		* 9.461893	53.95	PK-U	36.60	-41.80	0.00	48.75	-	-	74	-25.25	0	200	H
			* 9.468564	41.80	ADR	36.60	-41.70	0.00	36.70	54	-17.3	-	-	0	200	H
			* 9.459537	53.39	PK-U	36.60	-41.70	0.00	48.29	-	-	74	-25.71	0	101	V
			* 9.453177	41.70	ADR	36.60	-41.70	0.00	36.60	54	-17.4	-	-	0	101	V
			2.412193	59.43	PK-U	32.30	-47.90	0.00	43.83	-	-	68.2	-24.37	0	199	H
			2.413574	59.09	PK-U	32.30	-47.90	0.00	43.49	-	-	68.2	-24.71	0	101	V
			14.958581	51.31	PK-U	39.70	-38.60	0.00	52.41	-	-	68.2	-15.79	0	101	V
			14.965088	51.40	PK-U	39.70	-38.60	0.00	52.50	-	-	68.2	-15.7	0	200	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

80MHz

UNII-3 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11ac	5775	6 + 16	* 4.589315	46.92	ADR	34.50	-47.95	0.00	33.47	54	-20.53	-	-	360	100	H
			* 4.590121	46.87	ADR	34.50	-47.95	0.00	33.42	54	-20.58	-	-	360	201	V
			* 4.597354	58.89	PK-U	34.60	-47.98	0.00	45.51	-	-	74	-28.49	360	201	V
			* 4.606715	59.33	PK-U	34.60	-47.95	0.00	45.98	-	-	74	-28.02	360	100	H
			7.855563	56.76	PK-U	35.90	-45.54	0.00	47.12	-	-	68.2	-21.08	360	100	H
			7.861348	56.16	PK-U	36.00	-45.58	0.00	46.58	-	-	68.2	-21.62	360	201	V
			9.684652	57.60	PK-U	37.10	-46.27	0.00	48.43	-	-	68.2	-19.77	360	100	H
			9.706948	57.85	PK-U	37.20	-46.48	0.00	48.57	-	-	68.2	-19.63	360	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.1.35. 802.11be MIMO SU MODE IN UNII-3 BAND – SPURIOUS EMISSIONS

20MHz

UNII-3 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 SU Mode	5745	6+16	* 11.507921	52.79	PK-U	38.5	-39.20	0.00	52.09	-	-	74	-21.91	0	101	V
			* 11.514485	52.44	PK-U	38.5	-39.40	0.00	51.54	-	-	74	-22.46	0	101	H
			* 11.516400	40.77	ADR	38.5	-39.40	0.00	39.87	54	-14.13	-	-	0	101	H
			* 11.518326	40.62	ADR	38.5	-39.50	0.00	39.62	54	-14.38	-	-	0	101	V
			* 2.889122	56.38	PK-U	33.0	-45.90	0.00	43.48	-	-	74	-30.52	0	101	H
			* 2.891789	57.57	PK-U	33.0	-45.80	0.00	44.77	-	-	74	-29.23	0	101	V
			* 2.895182	44.79	ADR	33.0	-45.80	0.00	31.99	54	-22.01	-	-	0	101	V
			* 2.896582	44.80	ADR	33.0	-45.80	0.00	32.00	54	-22	-	-	0	101	H
			17.226519	53.41	PK-U	41.3	-38.30	0.00	56.41	-	-	68.2	-11.79	0	101	H
			17.226881	53.17	PK-U	41.3	-38.30	0.00	56.17	-	-	68.2	-12.03	0	101	V
			* 11.549333	40.47	ADR	38.6	-39.60	0.00	39.47	54	-14.53	-	-	0	101	H
			* 11.567645	52.38	PK-U	38.7	-39.60	0.00	51.48	-	-	74	-22.52	0	101	H
	* 11.571416		52.57	PK-U	38.7	-39.70	0.00	51.57	-	-	74	-22.43	0	101	V	
	5785		* 11.574634	40.51	ADR	38.7	-39.80	0.00	39.41	54	-14.59	-	-	0	101	V
			* 2.889451	56.46	PK-U	33.0	-45.90	0.00	43.56	-	-	74	-30.44	0	101	H
			* 2.896091	56.68	PK-U	33.0	-45.80	0.00	43.88	-	-	74	-30.12	0	101	V
			* 2.897364	44.73	ADR	33.0	-45.80	0.00	31.93	54	-22.07	-	-	0	101	H
			* 2.898004	45.11	ADR	33.0	-45.80	0.00	32.31	54	-21.69	-	-	0	101	V
			17.353057	53.27	PK-U	41.0	-38.70	0.00	55.57	-	-	68.2	-12.63	0	101	V
			17.362923	53.72	PK-U	41.0	-38.80	0.00	55.92	-	-	68.2	-12.28	0	101	H
			* 11.627037	51.45	PK-U	38.9	-39.60	0.00	50.75	-	-	74	-23.25	0	101	H
			* 11.632359	51.84	PK-U	38.9	-39.60	0.00	51.14	-	-	74	-22.86	0	101	V
			* 11.640459	39.92	ADR	38.9	-39.90	0.00	38.92	54	-15.08	-	-	0	101	H
			* 11.645923	39.89	ADR	39.0	-40.00	0.00	38.89	54	-15.11	-	-	0	101	V
			5825	* 2.891373	56.55	PK-U	33.0	-45.80	0.00	43.75	-	-	74	-30.25	0	101
	* 2.891600			44.92	ADR	33.0	-45.80	0.00	32.12	54	-21.88	-	-	0	101	H
	* 2.898381			56.56	PK-U	33.0	-45.80	0.00	43.76	-	-	74	-30.24	0	101	V
	17.467317			52.86	PK-U	41.0	-39.30	0.00	54.56	-	-	68.2	-13.64	0	101	V
	17.469365			52.77	PK-U	41.0	-39.30	0.00	54.47	-	-	68.2	-13.73	0	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

40MHz

UNII-3 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT40 SU Mode	5755	6+16	* 2.879328	56.98	PK-U	32.5	0.00	-47.67	41.81	-	-	74	-32.19	360	201	V
			* 2.884108	46.05	ADR	32.6	0.00	-47.72	30.93	54	-23.07	-	-	360	100	H
			* 2.884748	45.51	ADR	32.6	0.00	-47.72	30.39	54	-23.61	-	-	360	201	V
			* 2.885642	58.28	PK-U	32.6	0.00	-47.75	43.13	-	-	74	-30.87	360	100	H
			* 11.482559	43.67	ADR	38.2	0.00	-43.88	37.99	54	-16.01	-	-	360	201	V
			* 11.484661	55.46	PK-U	38.3	0.00	-43.92	49.84	-	-	74	-24.16	360	201	V
			* 11.504637	44.13	ADR	38.3	0.00	-43.88	38.55	54	-15.45	-	-	360	100	H
			* 11.509913	55.79	PK-U	38.3	0.00	-43.80	50.29	-	-	74	-23.71	360	100	H
			17.262544	55.58	PK-U	41.7	0.00	-41.76	55.52	-	-	68.2	-12.68	360	200	V
			17.281372	55.62	PK-U	41.7	0.00	-41.73	55.59	-	-	68.2	-12.61	360	100	H
			* 2.885272	45.53	ADR	32.6	0.00	-47.73	30.40	54	-23.6	-	-	360	201	V
			* 2.886664	45.77	ADR	32.6	0.00	-47.75	30.62	54	-23.38	-	-	360	100	H
	* 2.895304		57.40	PK-U	32.6	0.00	-47.76	42.24	-	-	74	-31.76	360	100	H	
	* 2.897878		57.06	PK-U	32.6	0.00	-47.74	41.92	-	-	74	-32.08	360	201	V	
	* 11.601237		43.95	ADR	38.4	0.00	-44.20	38.15	54	-15.85	-	-	360	100	H	
	* 11.615330		43.52	ADR	38.5	0.00	-44.06	37.96	54	-16.04	-	-	360	201	V	
	* 11.615739		55.80	PK-U	38.5	0.00	-44.04	50.26	-	-	74	-23.74	360	100	H	
	* 11.616037		55.78	PK-U	38.5	0.00	-44.02	50.26	-	-	74	-23.74	360	201	V	
	17.384107		55.82	PK-U	41.6	0.00	-42.11	55.31	-	-	68.2	-12.89	360	200	V	
	17.392064		56.10	PK-U	41.6	0.00	-42.00	55.70	-	-	68.2	-12.5	360	100	H	

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

80MHz

UNII-3 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filtr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT80 SU Mode	5775	6+16	* 15.963419	52.56	PK-U	41.0	0.00	-39.20	54.36	-	-	74	-19.64	1	101	H
			* 15.968801	41.13	ADR	41.0	0.00	-39.10	43.03	54	-10.97	-	-	1	101	H
			* 15.918577	53.37	PK-U	41.0	0.00	-38.20	56.17	-	-	74	-17.83	1	101	V
			* 15.914572	41.20	ADR	41.0	0.00	-38.30	43.90	54	-10.1	-	-	1	101	V
			2.579418	55.32	PK-U	32.6	0.00	-46.00	41.92	-	-	68.2	-26.28	1	200	H
			2.580017	55.78	PK-U	32.6	0.00	-46.00	42.38	-	-	68.2	-25.82	1	101	V
			9.595704	52.00	PK-U	37.0	0.00	-40.50	48.50	-	-	68.2	-19.7	1	200	V
			9.658352	52.75	PK-U	37.0	0.00	-40.90	48.85	-	-	68.2	-19.35	1	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

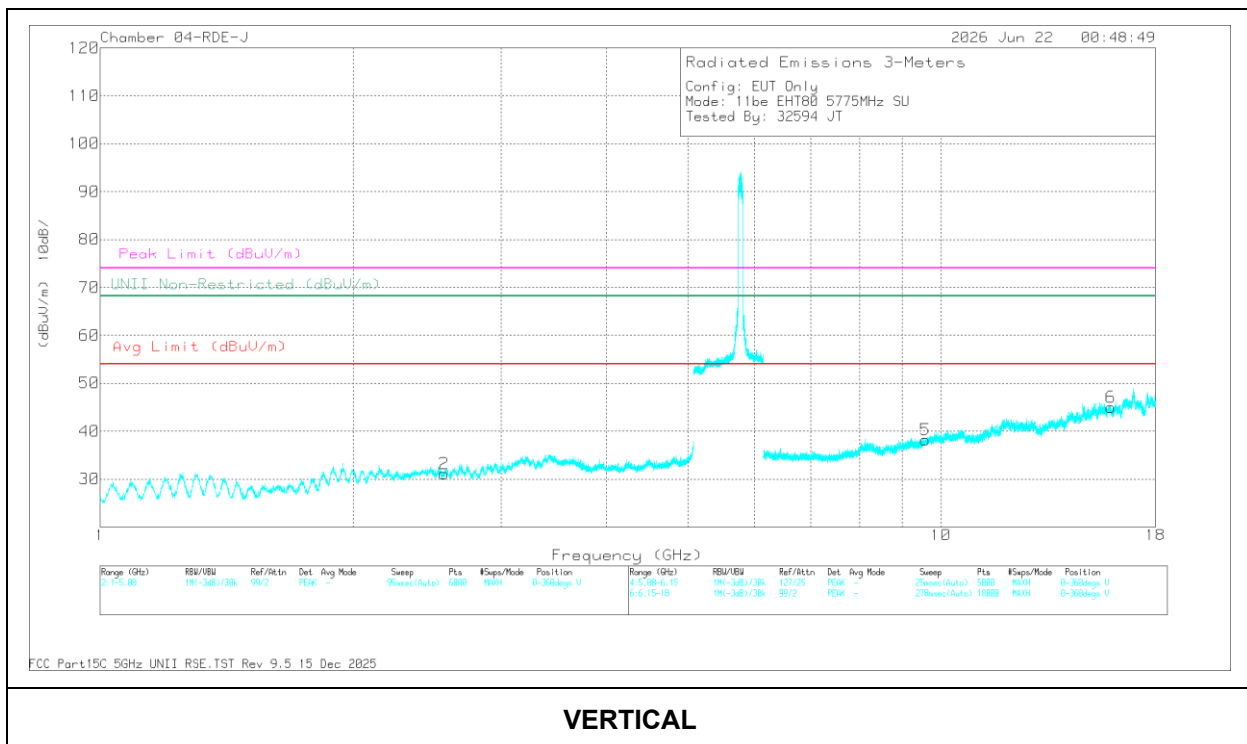
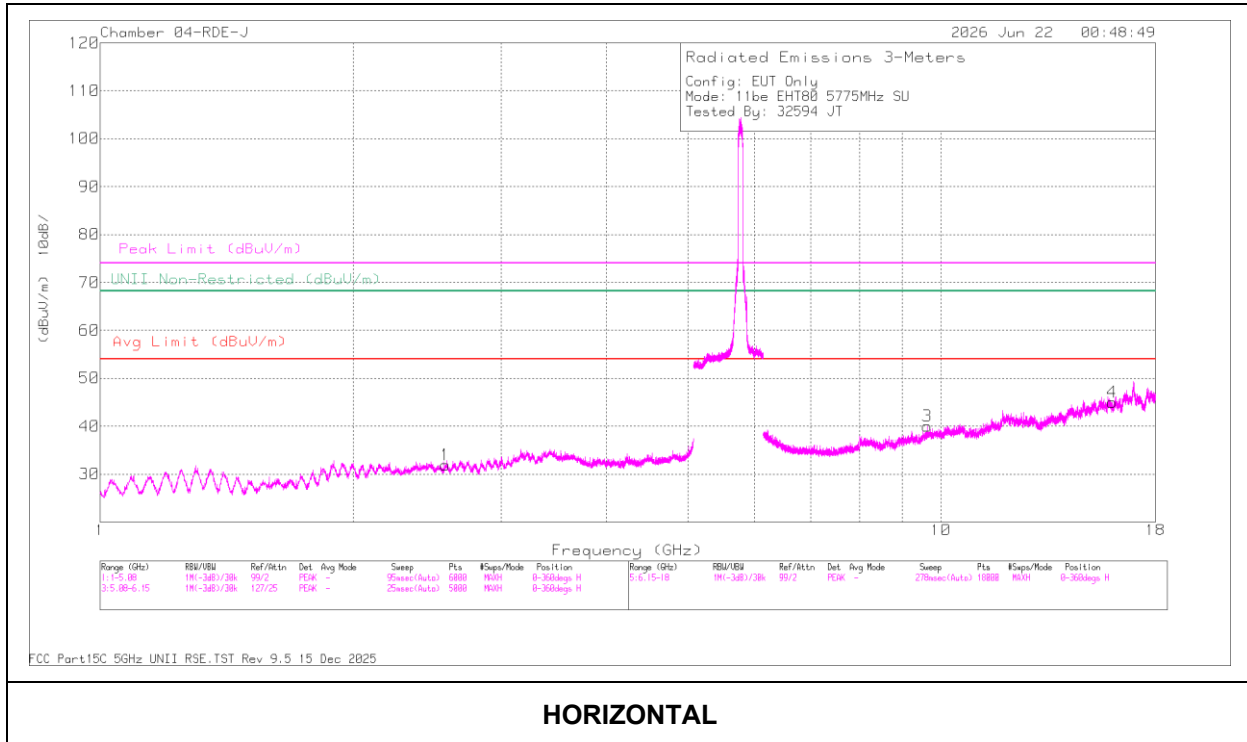
1.1.36. 802.11be MIMO PARTIAL RU MODE IN UNII-3 BAND – SPURIOUS EMISSIONS

UNII-3 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filtr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 26T - RU0	5745	6+16	* 11.411813	57.06	PK-U	38.2	0.00	-45.30	49.96	-	-	74	-24.04	360	101	V
			* 11.413413	56.92	PK-U	38.2	0.00	-45.30	49.82	-	-	74	-24.18	360	101	H
			* 11.432982	45.57	ADR	38.2	0.00	-45.30	38.47	54	-15.53	-	-	360	101	V
			* 11.440950	45.42	ADR	38.2	0.00	-45.20	38.42	54	-15.58	-	-	360	101	H
			* 2.835708	60.67	PK-U	32.5	0.00	-49.00	44.17	-	-	74	-29.83	360	101	V
			* 2.838318	48.52	ADR	32.5	0.00	-49.03	31.99	54	-22.01	-	-	360	101	H
			* 2.841468	48.58	ADR	32.5	0.00	-49.00	32.08	54	-21.92	-	-	360	101	V
			* 2.849638	60.02	PK-U	32.5	0.00	-49.06	43.46	-	-	74	-30.54	360	101	H
			17.225364	58.18	PK-U	41.1	0.00	-43.64	55.64	-	-	68.2	-12.56	360	101	V
			17.237219	58.37	PK-U	41.1	0.00	-43.50	55.97	-	-	68.2	-12.23	360	101	H
			2.901099	58.89	PK-U	32.7	0.00	-48.39	43.20	-	-	68.2	-25	360	100	V
			2.909652	59.04	PK-U	32.8	0.00	-48.42	43.42	-	-	68.2	-24.78	360	100	H
EHT20 26T - RU4	5785	6+16	* 11.564041	56.77	PK-U	38.7	0.00	-44.55	50.92	-	-	74	-23.08	360	200	V
			* 11.569543	44.80	ADR	38.7	0.00	-44.57	38.93	54	-15.07	-	-	360	201	H
			* 11.576663	44.61	ADR	38.8	0.00	-44.54	38.87	54	-15.13	-	-	360	200	V
			* 11.577196	56.43	PK-U	38.8	0.00	-44.55	50.68	-	-	74	-23.32	360	201	H
			16.816501	56.74	PK-U	41.6	0.00	-43.99	54.35	-	-	68.2	-13.85	360	200	V
			16.819190	56.93	PK-U	41.6	0.00	-44.01	54.52	-	-	68.2	-13.68	360	200	H
			* 2.889107	59.57	PK-U	32.6	0.00	-48.43	43.74	-	-	74	-30.26	360	100	V
			* 2.896260	59.05	PK-U	32.7	0.00	-48.41	43.34	-	-	74	-30.66	360	100	H
			* 11.174025	56.39	PK-U	38.2	0.00	-44.91	49.68	-	-	74	-24.32	360	201	V
			* 11.176922	44.87	ADR	38.2	0.00	-44.87	38.20	54	-15.8	-	-	360	201	V
			* 11.179941	44.86	ADR	38.2	0.00	-44.90	38.16	54	-15.84	-	-	360	100	H
			* 11.196386	57.21	PK-U	38.3	0.00	-44.90	50.61	-	-	74	-23.39	360	100	H
EHT20 26T - RU8	5825	6+16	* 15.790265	56.31	PK-U	41.2	0.00	-43.59	53.92	-	-	74	-20.08	360	200	V
			* 15.791434	44.49	ADR	41.2	0.00	-43.59	42.10	54	-11.9	-	-	360	200	V
			* 15.807860	44.35	ADR	41.2	0.00	-43.57	41.98	54	-12.02	-	-	360	100	H
			* 15.811105	55.81	PK-U	41.1	0.00	-43.57	53.34	-	-	74	-20.66	360	100	H
			* 11.560516	56.22	PK-U	38.7	0.00	-44.50	50.42	-	-	74	-23.58	0	201	V
			* 11.581725	44.61	ADR	38.7	0.00	-44.54	38.77	54	-15.23	-	-	0	201	V
			* 11.585454	44.56	ADR	38.8	0.00	-44.52	38.84	54	-15.16	-	-	0	100	H
			* 11.586930	56.56	PK-U	38.8	0.00	-44.50	50.86	-	-	74	-23.14	0	100	H
			* 2.895316	59.58	PK-U	32.7	0.00	-48.40	43.88	-	-	74	-30.12	0	201	V
			* 2.898409	47.45	ADR	32.7	0.00	-48.41	31.74	54	-22.26	-	-	0	100	H
			* 2.899989	59.30	PK-U	32.7	0.00	-48.40	43.60	-	-	74	-30.4	0	100	H
			14.936893	57.58	PK-U	40.6	0.00	-44.46	53.72	-	-	68.2	-14.48	0	200	V
EHT80 484+242T - RU93	5775	6+16	14.939493	57.32	PK-U	40.6	0.00	-44.42	53.50	-	-	68.2	-14.7	0	100	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

WORST-CASE HARMONICS AND SPURIOUS EMISSIONS**802.11be EHT80 / 5775 MHz / 2TX CDD / SU**

Radiated Emissions

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filt/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	* 15.963419	52.56	PK-U	41.0	0.00	-39.20	54.36	-	-	74	-19.64	1	101	H
4	* 15.968801	41.13	ADR	41.0	0.00	-39.10	43.03	54	-10.97	-	-	1	101	H
6	* 15.918577	53.37	PK-U	41.0	0.00	-38.20	56.17	-	-	74	-17.83	1	101	V
6	* 15.914572	41.20	ADR	41.0	0.00	-38.30	43.90	54	-10.1	-	-	1	101	V
1	2.579418	55.32	PK-U	32.6	0.00	-46.00	41.92	-	-	68.2	-26.28	1	200	H
2	2.580017	55.78	PK-U	32.6	0.00	-46.00	42.38	-	-	68.2	-25.82	1	101	V
5	9.595704	52.00	PK-U	37.0	0.00	-40.50	48.50	-	-	68.2	-19.7	1	200	V
3	9.658352	52.75	PK-U	37.0	0.00	-40.90	48.85	-	-	68.2	-19.35	1	101	H

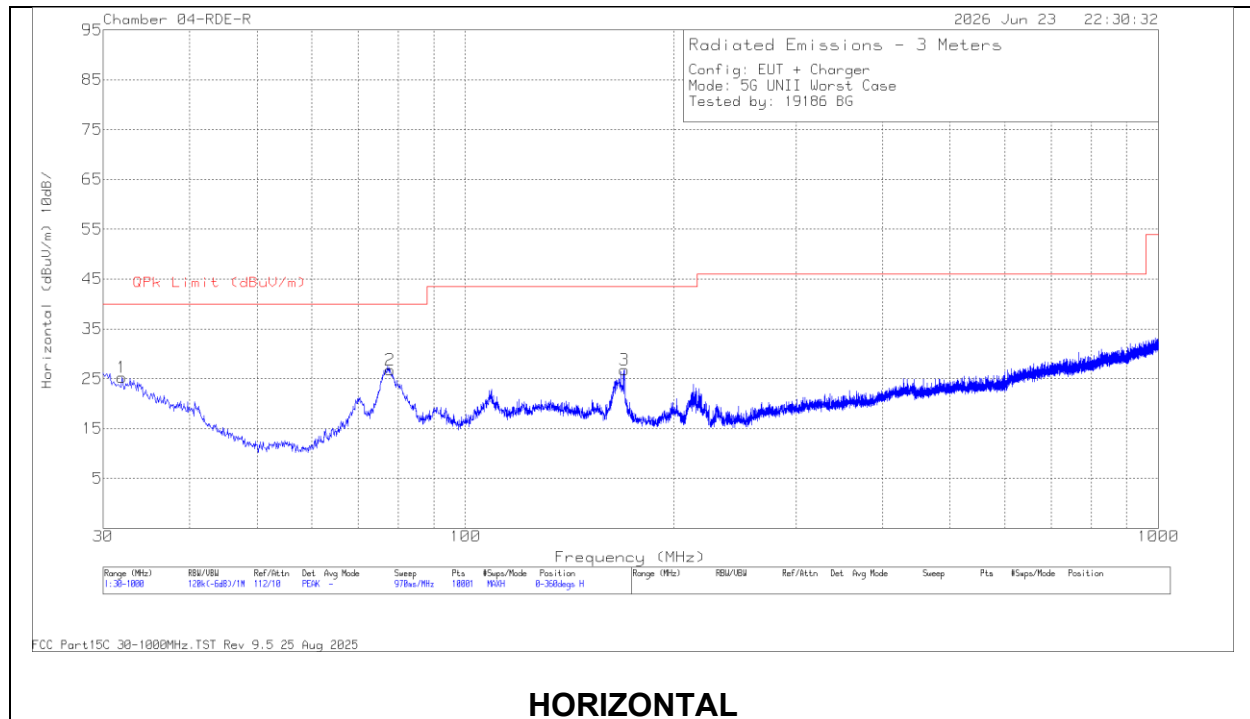
* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

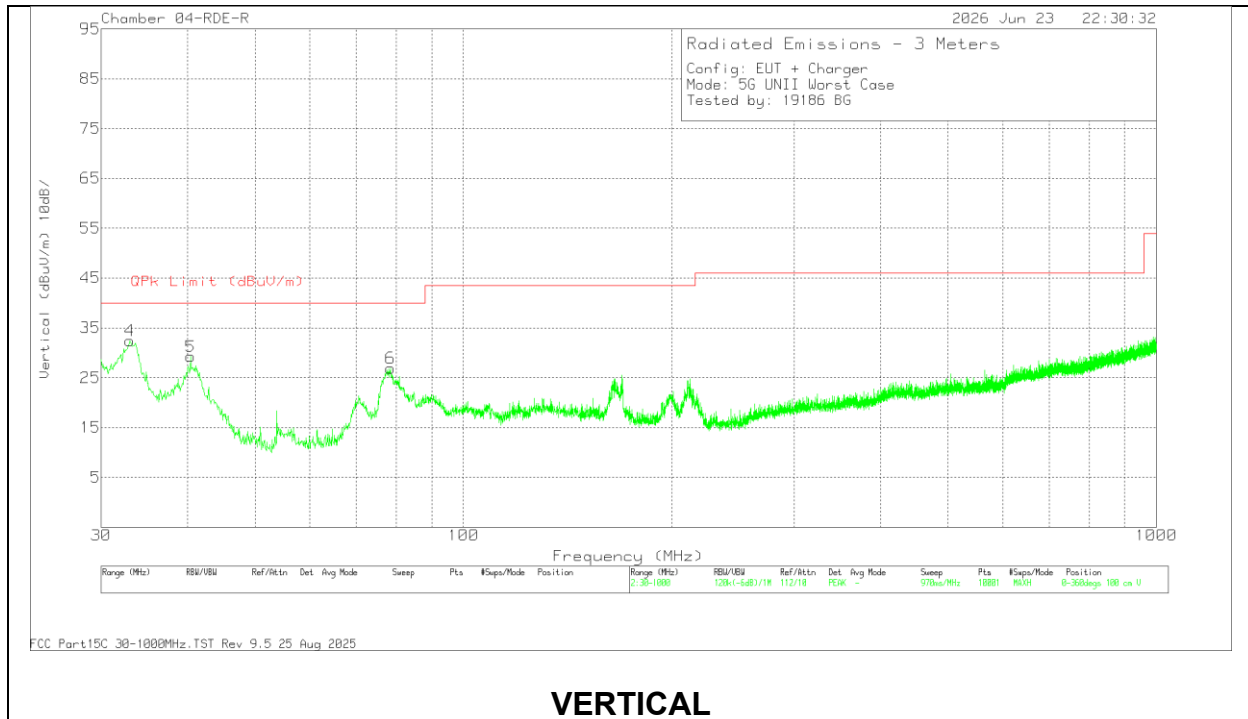
PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.2. WORST CASE BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION)





Below 1GHz Data

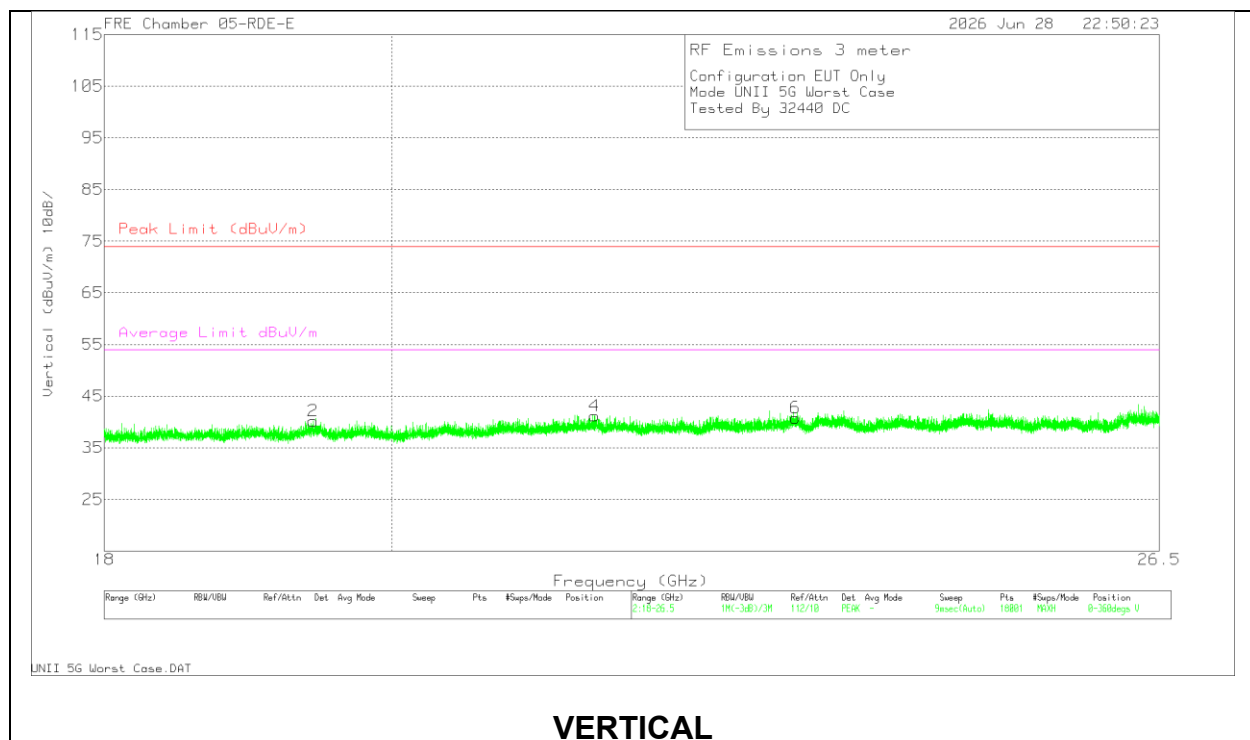
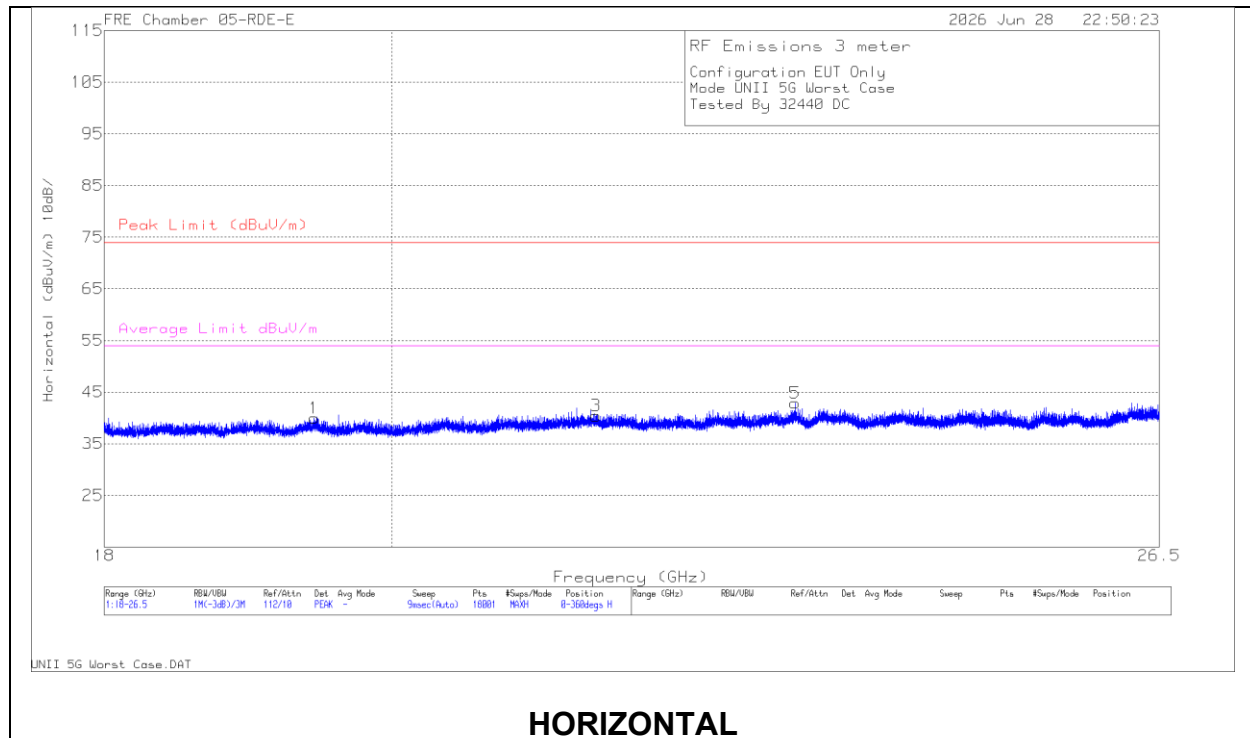
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	204044 ACF (dB/m)	Amp/Cbl (dB)	Corrected Reading	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	31.94000	32.11	Pk	25.40	-32.20	25.31	40	-14.69	0-360	99	H
2	77.82100	44.81	Pk	13.70	-31.70	26.81	40	-13.19	0-360	200	H
3	* 169.486	40.23	Pk	17.70	-31.20	26.73	43.52	-16.79	0-360	99	H
4	33.00700	40.05	Pk	24.60	-32.20	32.45	40	-7.55	0-360	100	V
5	40.37900	41.93	Pk	19.40	-32.10	29.23	40	-10.77	0-360	100	V
6	78.50000	44.87	Pk	13.70	-31.70	26.87	40	-13.13	0-360	100	V

Pk - Peak detector

Qp - Quasi-Peak detector

1.3. WORST CASE 18-26 GHz

SPURIOUS EMISSIONS 18-26 GHz (WORST-CASE CONFIGURATION)



18 – 26GHz Data

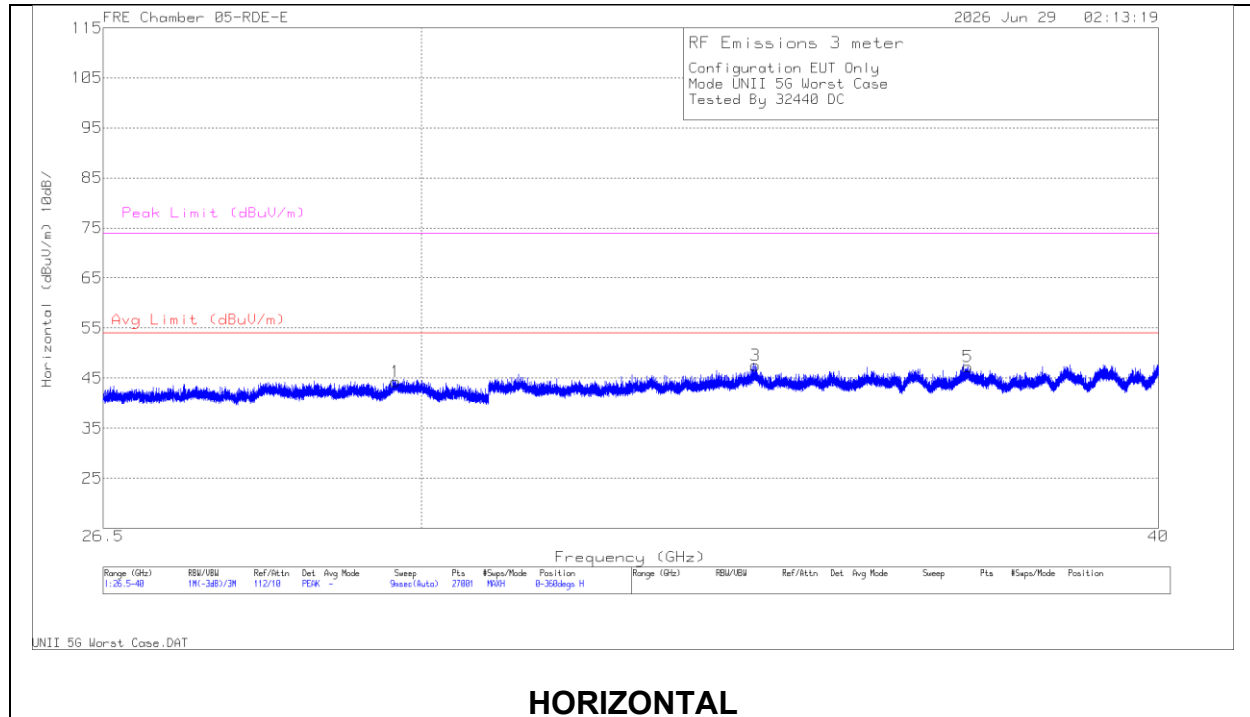
Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	172363 ACF (dB/m)	CBL/AMP (dB)	Cables (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Avg Limit dBuV/m	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 19.4334	46.49	ADR	32.40	-62.90	13.20	0.00	29.19	54	-24.81	-	-	182	200	V
2	* 19.434857	59.02	PK-U	32.40	-62.90	13.20	0.00	41.72	-	-	74	-32.28	182	200	V
1	* 19.44145	59.18	PK-U	32.40	-62.90	13.20	0.00	41.88	-	-	74	-32.12	182	200	H
1	* 19.442563	46.30	ADR	32.40	-62.90	13.20	0.00	29.00	54	-25	-	-	182	200	H
4	* 21.547221	46.82	ADR	32.90	-62.60	13.80	0.00	30.92	54	-23.08	-	-	182	200	V
4	* 21.547726	58.66	PK-U	32.90	-62.60	13.80	0.00	42.76	-	-	74	-31.24	182	200	V
3	* 21.555300	58.35	PK-U	32.90	-62.60	13.70	0.00	42.35	-	-	74	-31.65	182	101	H
3	* 21.555346	46.76	ADR	32.90	-62.60	13.70	0.00	30.76	54	-23.24	-	-	182	101	H
6	23.187034	58.56	PK-U	33.20	-62.50	14.30	0.00	43.56	-	-	68.2	-24.64	182	200	V
5	23.189576	58.27	PK-U	33.20	-62.50	14.30	0.00	43.27	-	-	68.2	-24.93	182	200	H

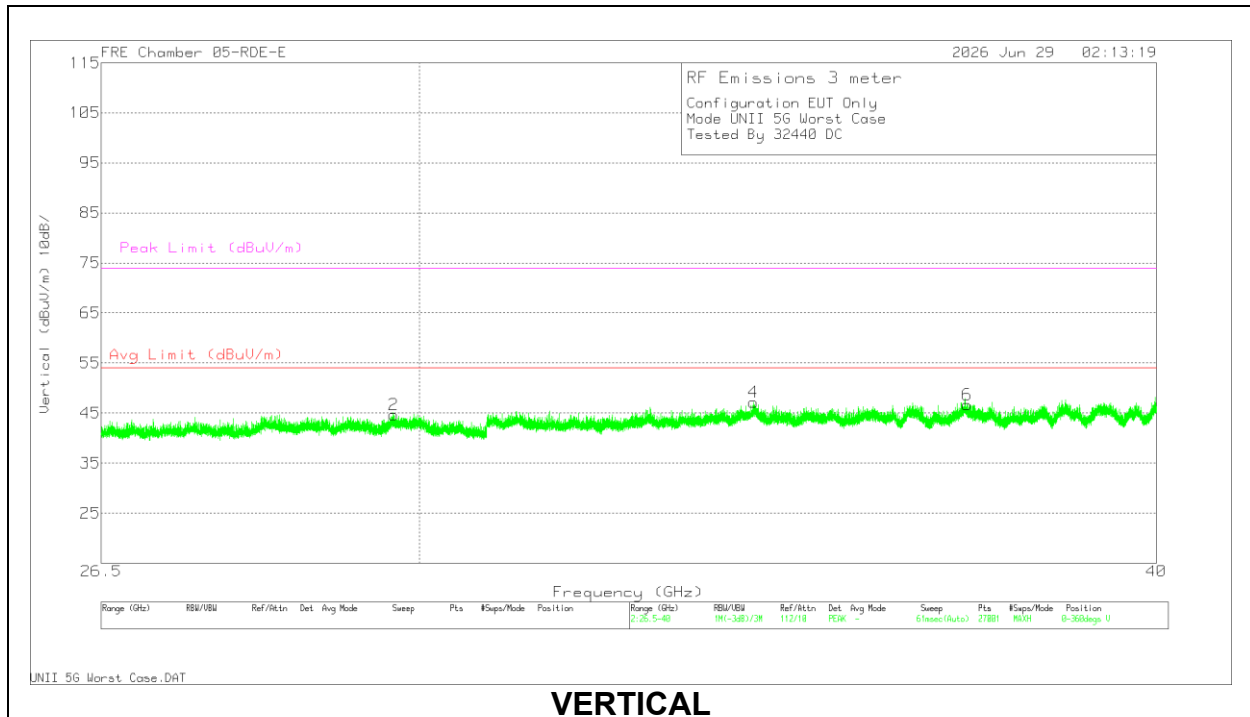
* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.4. WORST CASE 26-40 GHz





26 – 40GHz Data

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	172366 ACF (dB/m)	CBL/AMP (dB)	Cables (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Avg Limit dBuV/m	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	29.704446	63.19	PK-U	36.30	-70.50	16.50	0.00	45.49	-	-	68.2	-22.71	71	200	V
1	29.706700	41.37	PK-U	36.30	-70.50	16.50	0.00	23.67	-	-	68.2	-44.53	71	200	H
4	34.178062	64.10	PK-U	37.20	-72.40	17.90	0.00	46.80	-	-	68.2	-21.4	71	200	V
3	34.183836	64.57	PK-U	37.20	-72.40	18.00	0.00	47.37	-	-	68.2	-20.83	71	101	H
5	37.130638	61.91	PK-U	37.80	-69.80	19.00	0.00	48.91	-	-	68.2	-19.29	71	101	H
6	37.154331	60.99	PK-U	37.90	-69.80	19.00	0.00	48.09	-	-	68.2	-20.11	71	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

2. AC POWERLINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 8.8

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.

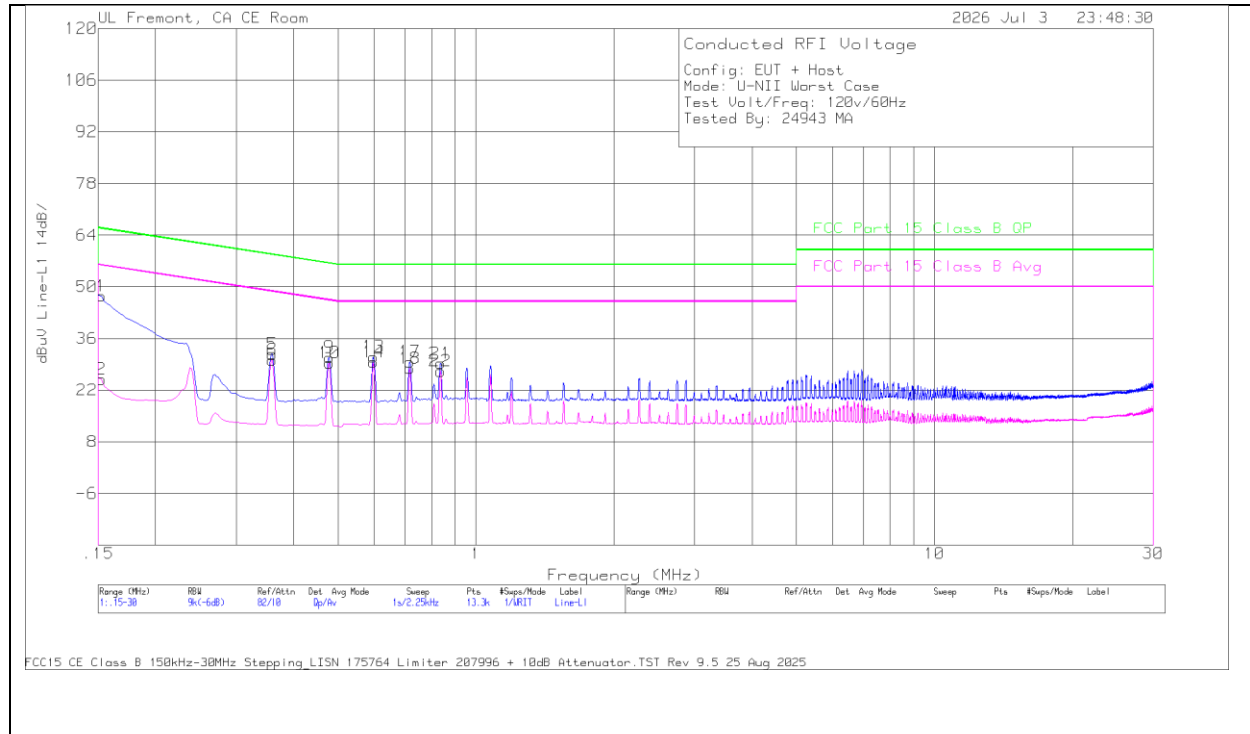
The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both HOT (L1) and NEUTRAL (L2) lines.

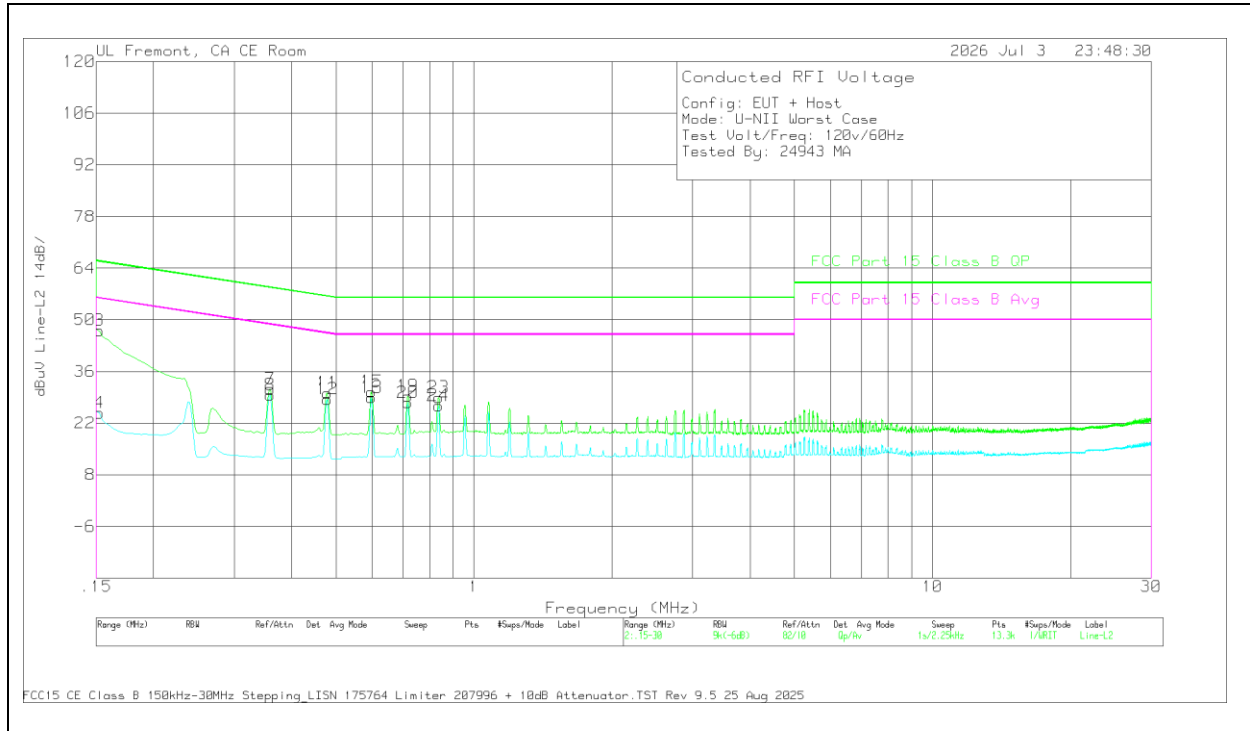
RESULTS

2.1. AC POWER LINE WITH LAPTOP

LINE 1 RESULTS



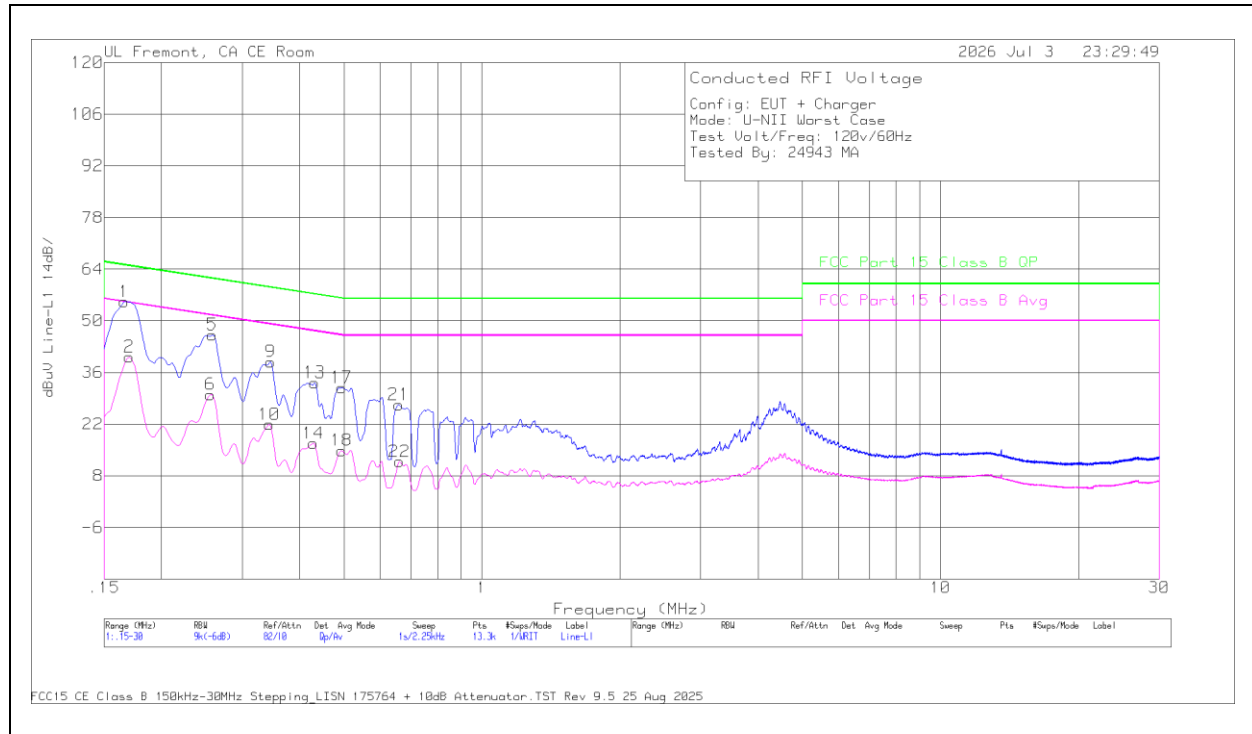
Range 1: Phase L1 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	CBL (dB)	LISN (dB)	10dB Atten (dB)	Corrected Reading (dBuV)	FCC Part 15 Class B QP (dBuV)	Margin (dB)	FCC Part 15 class B Avg (dBuV)	Margin (dB)
2	0.15230	5.54	Av	0.10	9.40	9.90	24.94	-	-	55.88	-30.94
6	0.35930	10.99	Av	0.00	9.30	9.90	30.19	-	-	48.75	-18.56
10	0.47850	10.18	Av	0.00	9.30	9.90	29.38	-	-	46.37	-16.99
14	0.59780	10.39	Av	0.00	9.30	9.90	29.59	-	-	46	-16.41
18	0.71700	8.67	Av	0.00	9.30	9.90	27.87	-	-	46	-18.13
22	0.83630	7.86	Av	0.00	9.40	9.90	27.16	-	-	46	-18.84
1	0.15230	28.07	Qp	0.10	9.40	9.90	47.47	65.88	-18.41	-	-
5	0.35930	12.56	Qp	0.00	9.30	9.90	31.76	58.75	-26.99	-	-
9	0.47850	11.66	Qp	0.00	9.30	9.90	30.86	56.37	-25.51	-	-
13	0.59780	11.81	Qp	0.00	9.30	9.90	31.01	56	-24.99	-	-
17	0.71700	10.41	Qp	0.00	9.30	9.90	29.61	56	-26.39	-	-
21	0.83630	9.92	Qp	0.00	9.40	9.90	29.22	56	-26.78	-	-

LINE 2 RESULTS

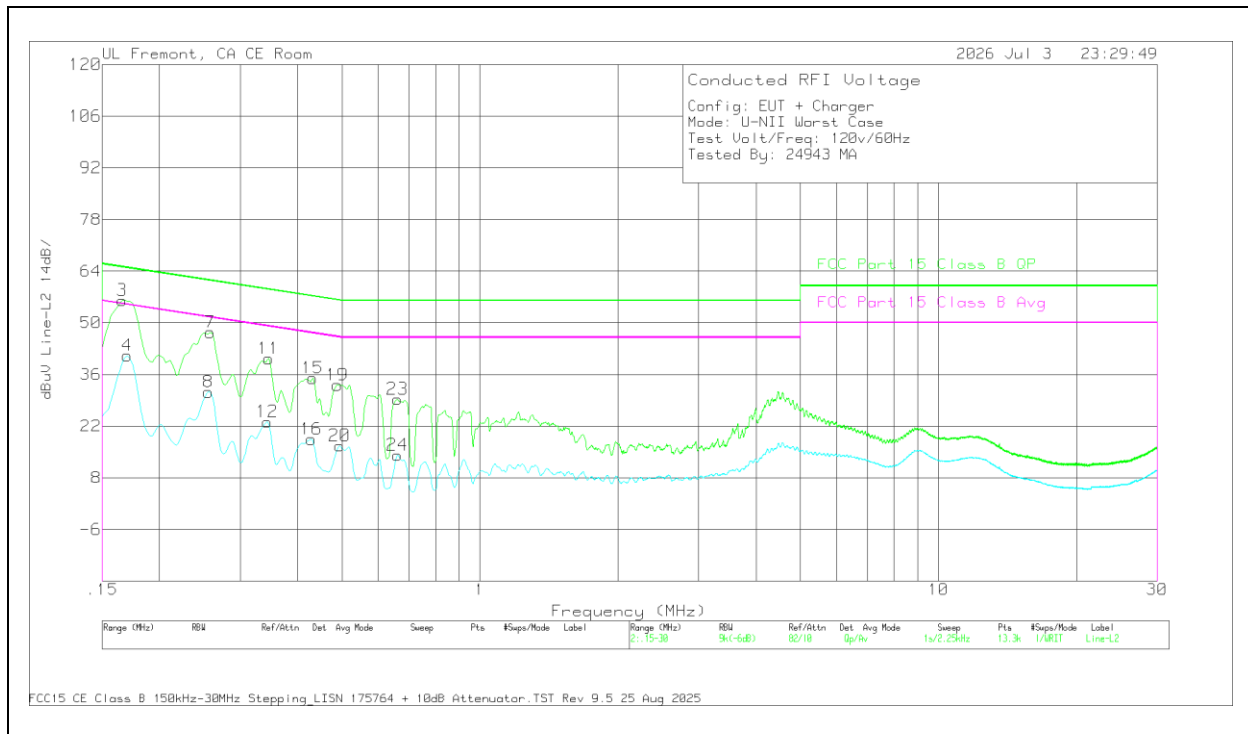
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	CBL (dB)	LISN (dB)	10dB Atten (dB)	Corrected Reading (dBuV)	FCC Part 15 Class B QP (dBuV)	Margin (dB)	FCC Part 15 class B Avg (dBuV)	Margin (dB)
4	0.15230	5.37	Av	0.10	9.40	9.90	24.77	-	-	55.88	-31.11
8	0.35930	10.32	Av	0.00	9.40	9.90	29.62	-	-	48.75	-19.13
12	0.47850	9.3	Av	0.00	9.30	9.90	28.50	-	-	46.37	-17.87
16	0.59780	9.76	Av	0.00	9.30	9.90	28.96	-	-	46	-17.04
20	0.71700	8.21	Av	0.00	9.40	9.90	27.51	-	-	46	-18.49
24	0.83630	7.44	Av	0.00	9.40	9.90	26.74	-	-	46	-19.26
3	0.15230	27.69	Qp	0.10	9.40	9.90	47.09	65.88	-18.79	-	-
7	0.35930	11.93	Qp	0.00	9.40	9.90	31.23	58.75	-27.52	-	-
11	0.47850	10.99	Qp	0.00	9.30	9.90	30.19	56.37	-26.18	-	-
15	0.59780	11.29	Qp	0.00	9.30	9.90	30.49	56	-25.51	-	-
19	0.71700	10.02	Qp	0.00	9.40	9.90	29.32	56	-26.68	-	-
23	0.83630	9.63	Qp	0.00	9.40	9.90	28.93	56	-27.07	-	-

2.2. AC POWER LINE WITH AC/DC ADAPTER

LINE 1 RESULTS



Range 1: Phase L1 .15 - 30MHz										
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	175764 LISN L1	Line 1 202326, C3 202322, C1 202326 (10dB)	Corrected Reading (dBuV)	FCC Part 15 Class B Avg (dBuV)	Margin (dB)	FCC Part 15 class B QP (dBuV)	Margin (dB)
2	0.17030	30.04	Av	0.10	10.10	40.24	54.95	-14.71	-	-
6	0.25580	19.92	Av	0.00	10.10	30.02	51.57	-21.55	-	-
10	0.34350	11.83	Av	0.00	10.10	21.93	49.12	-27.19	-	-
14	0.42900	6.7	Av	0.00	10.10	16.80	47.27	-30.47	-	-
18	0.49430	4.74	Av	0.00	10.10	14.84	46.1	-31.26	-	-
22	0.66080	1.74	Av	0.00	10.10	11.84	46	-34.16	-	-
1	0.16580	44.95	Qp	0.10	10.10	55.15	-	-	65.17	-10.02
5	0.25800	36.21	Qp	0.00	10.00	46.21	-	-	61.5	-15.29
9	0.34580	28.79	Qp	0.00	10.10	38.89	-	-	59.06	-20.17
13	0.43130	23.15	Qp	0.00	10.10	33.25	-	-	57.23	-23.98
17	0.49430	21.77	Qp	0.00	10.10	31.87	-	-	56.1	-24.23
21	0.65850	17.15	Qp	0.00	10.10	27.25	-	-	56	-28.75

LINE 2 RESULTS

Range 2: Phase L2 .15 - 30MHz										
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	175764 LISN L2 (dB)	Line 1 202326, C3 202322, C1 202326 (10dB)	Corrected Reading (dBuV)	FCC Part 15 Class B Avg (dBuV)	Margin (dB)	FCC Part 15 class B QP (dBuV)	Margin (dB)
4	0.17030	30.92	Av	0.10	10.10	41.12	54.95	-13.83	-	-
8	0.25580	21.15	Av	0.00	10.10	31.25	51.57	-20.32	-	-
12	0.34350	13.06	Av	0.00	10.10	23.16	49.12	-25.96	-	-
16	0.42900	8.36	Av	0.00	10.10	18.46	47.27	-28.81	-	-
20	0.49430	6.57	Av	0.00	10.10	16.67	46.1	-29.43	-	-
24	0.66080	4.04	Av	0.00	10.10	14.14	46	-31.86	-	-
3	0.16580	45.87	Qp	0.10	10.10	56.07	-	-	65.17	-9.1
7	0.25800	37.33	Qp	0.00	10.10	47.43	-	-	61.5	-14.07
11	0.34580	30.19	Qp	0.00	10.10	40.29	-	-	59.06	-18.77
15	0.43130	24.88	Qp	0.00	10.10	34.98	-	-	57.23	-22.25
19	0.48860	23.01	Qp	0.00	10.10	33.11	-	-	56.19	-23.08
23	0.66080	19.19	Qp	0.00	10.10	29.29	-	-	56	-26.71

3. SETUP PHOTOS

Please refer to the setup report 15982168-EP1V1 FCC IC Setup Photos

END OF TEST REPORT