

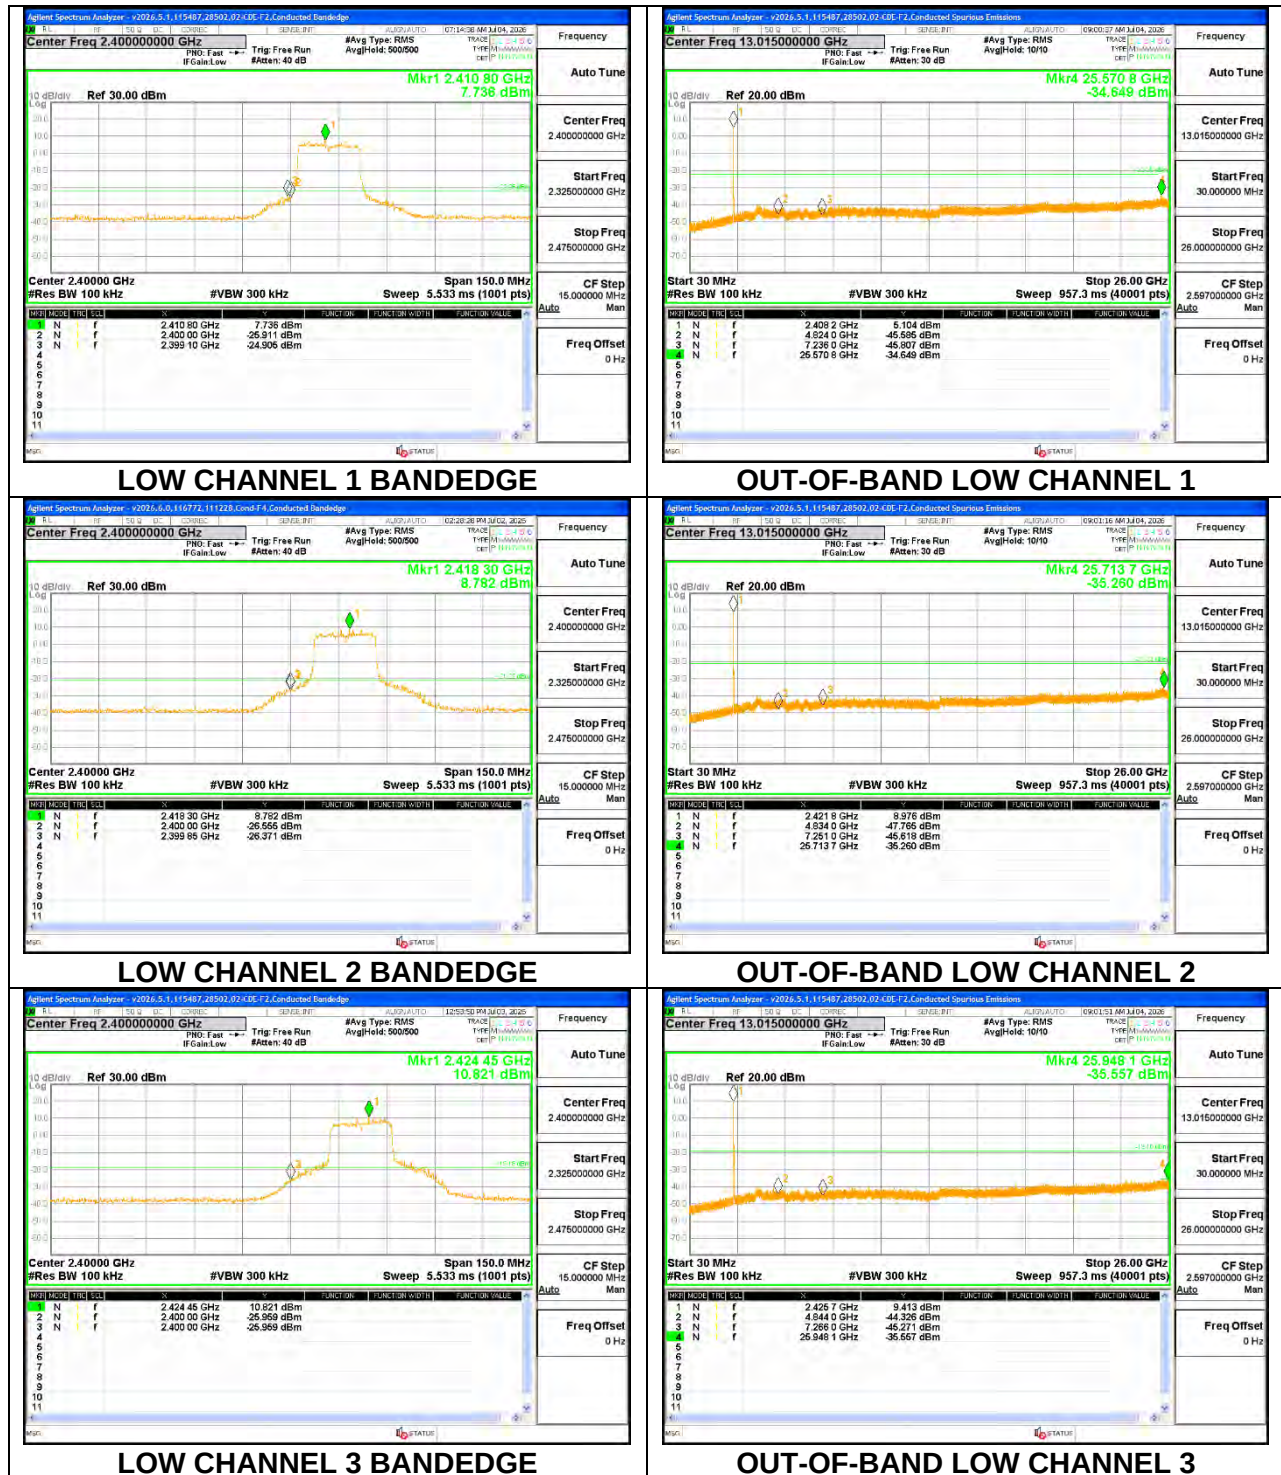



1TX ANT 4 MODE, SU Mode

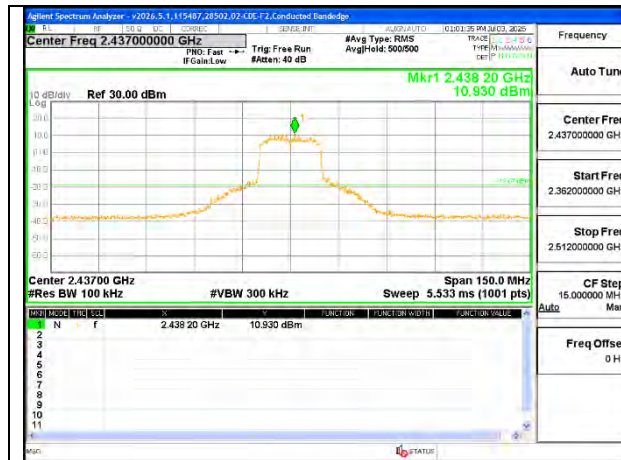


IN-BAND REFERENCE LEVEL

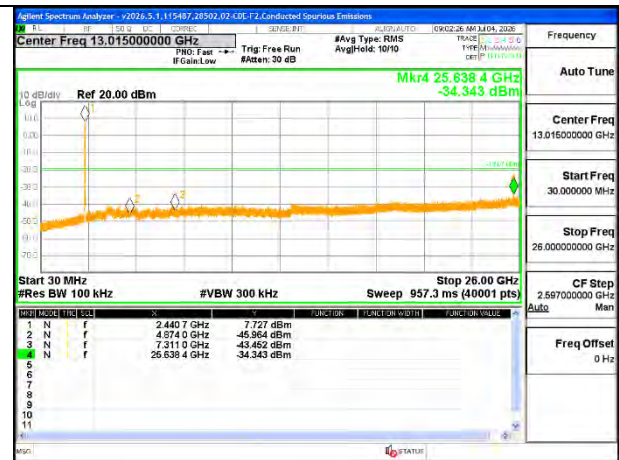

OUT-OF-BAND MID CHANNEL

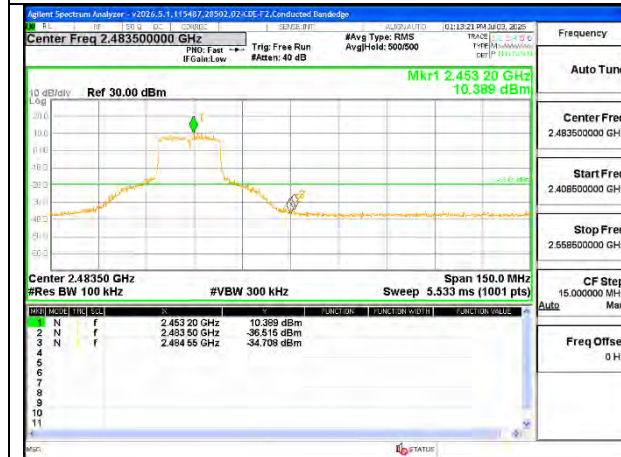


HIGH CHANNEL 9 BANDEDGE

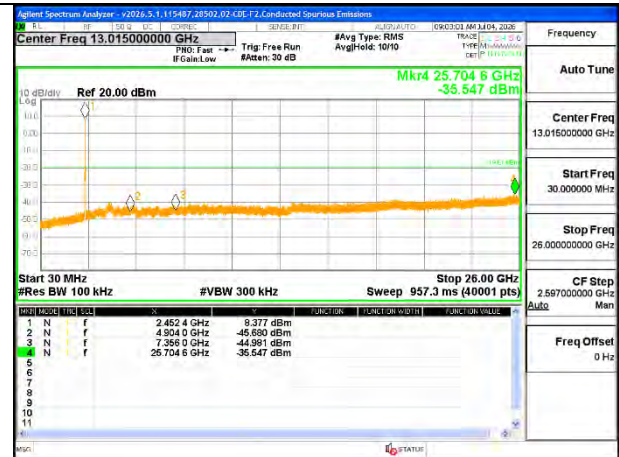

OUT-OF-BAND HIGH CHANNEL 9




HIGH CHANNEL 10 BANDEDGE

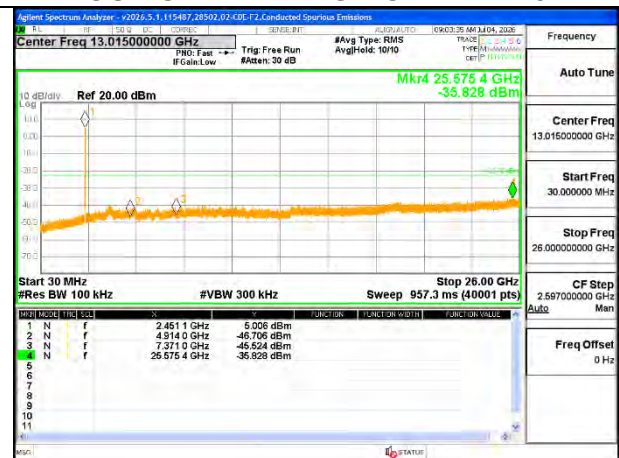

OUT-OF-BAND HIGH CHANNEL 10




HIGH CHANNEL 11 BANDEDGE

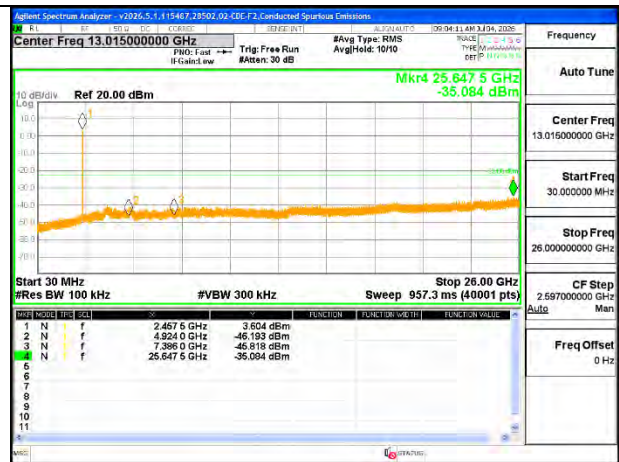

OUT-OF-BAND HIGH CHANNEL 11




HIGH CHANNEL 12 BANDEDGE

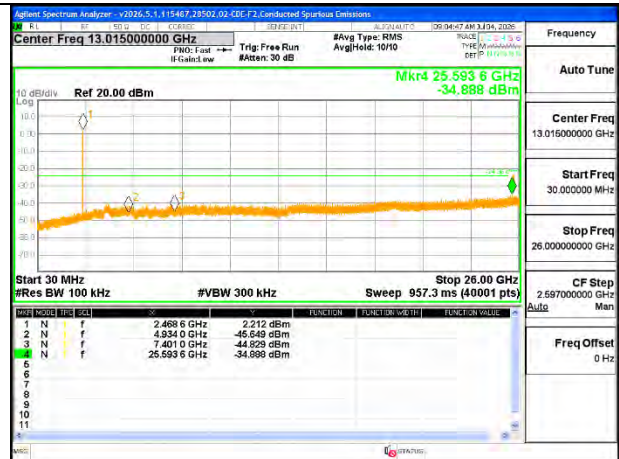


OUT-OF-BAND HIGH CHANNEL 12





HIGH CHANNEL 13 BANDEDGE

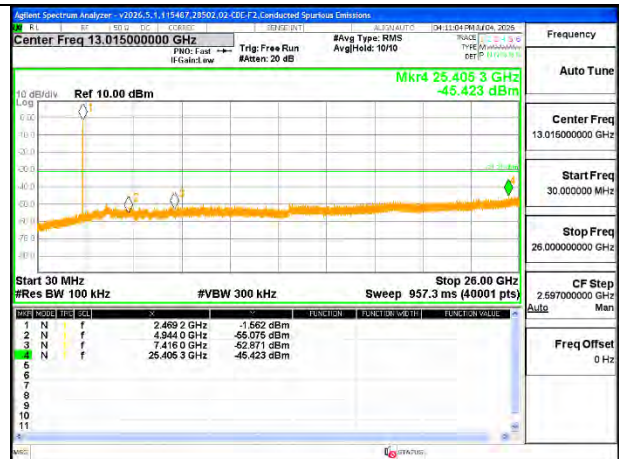


OUT-OF-BAND HIGH CHANNEL 13

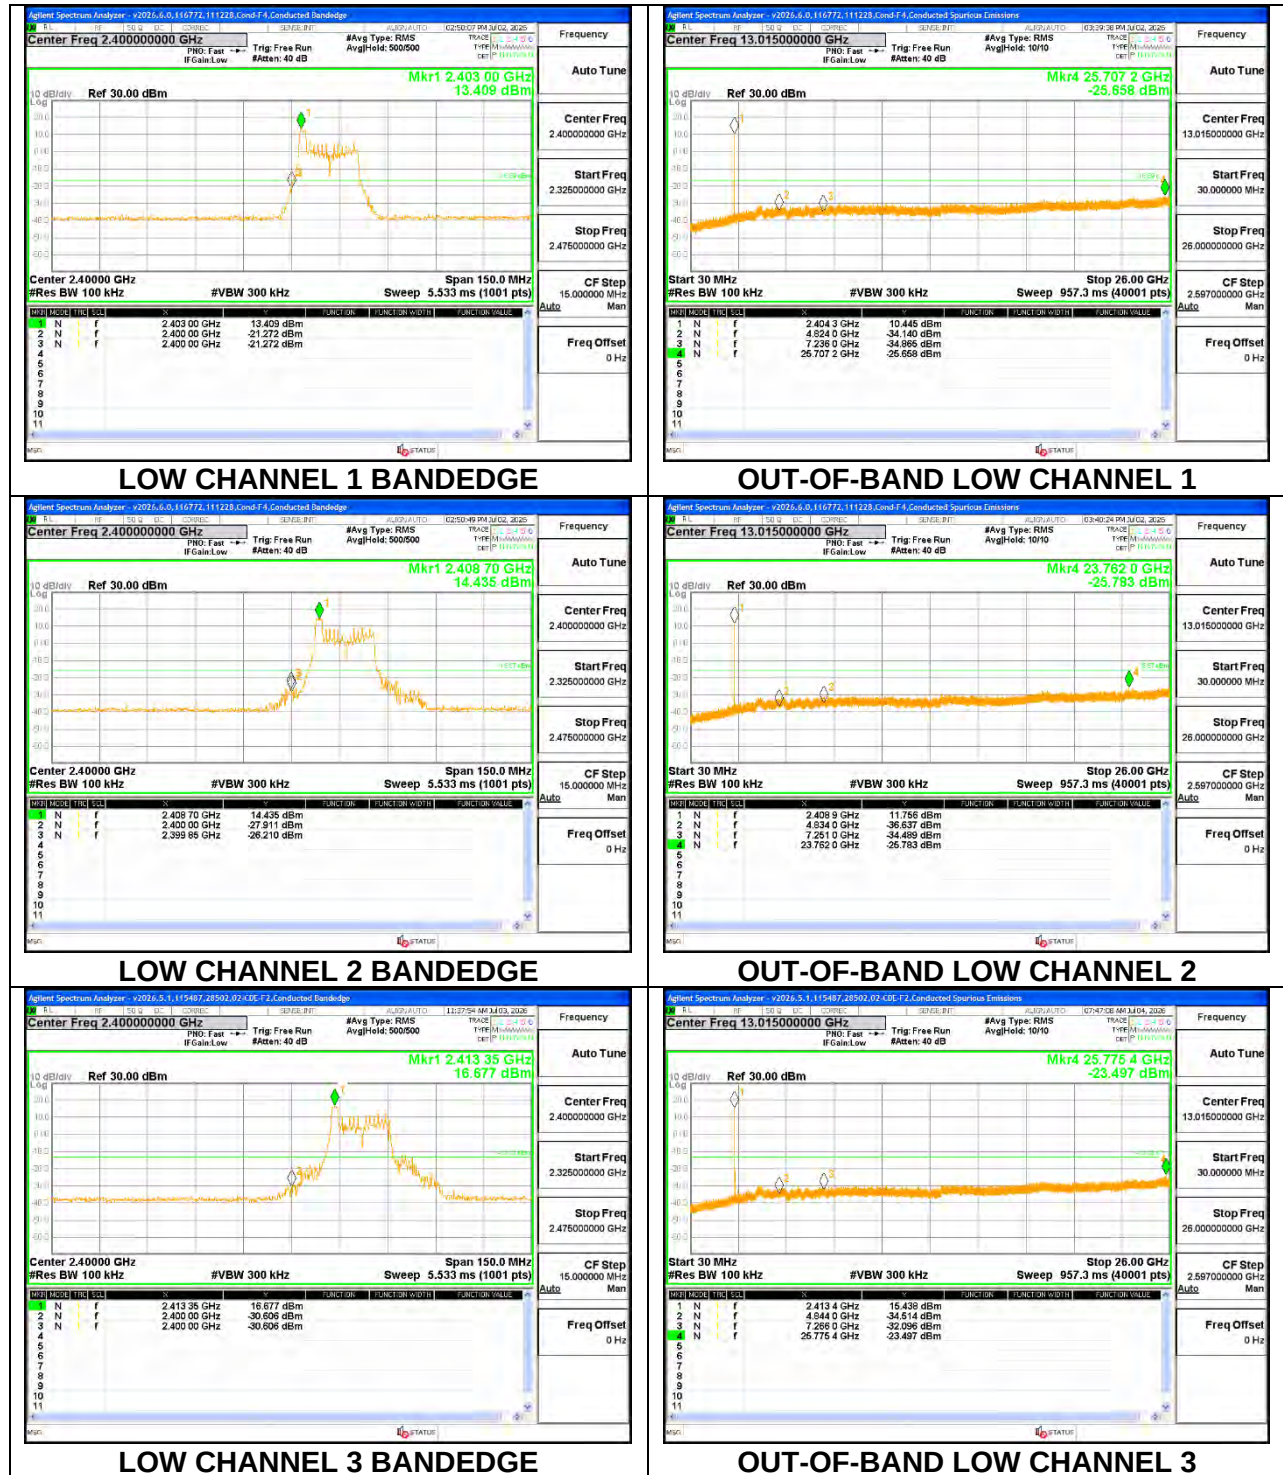1TX ANT 3 MODE, 26-Tone RU Index 0

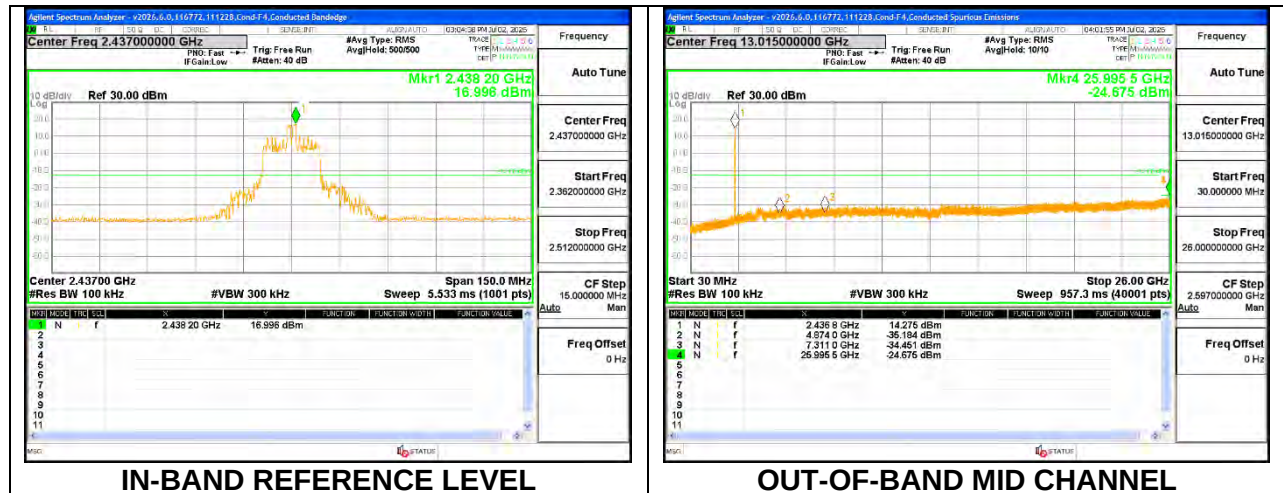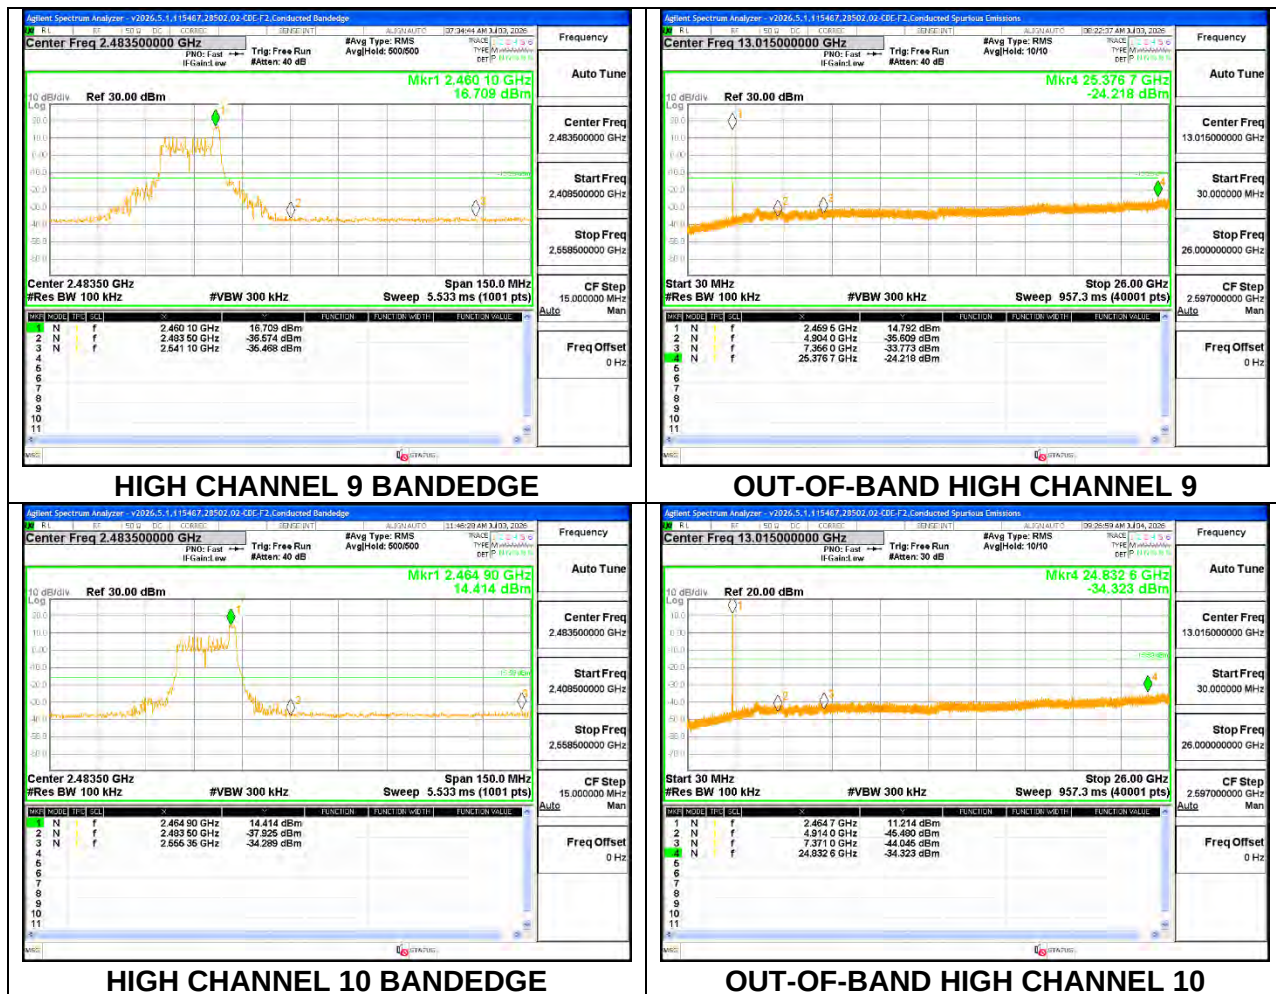
1TX ANT 3 MODE, 26-Tone RU Index 4**1TX ANT 3 MODE, 26-Tone RU Index 8**




HIGH CHANNEL 11 BANDEDGE

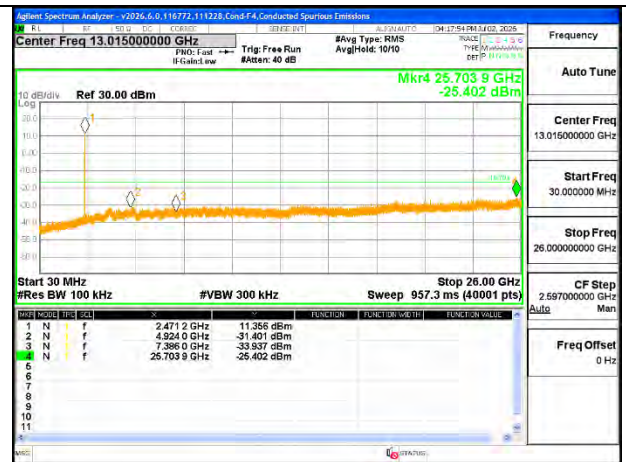

OUT-OF-BAND HIGH CHANNEL 11

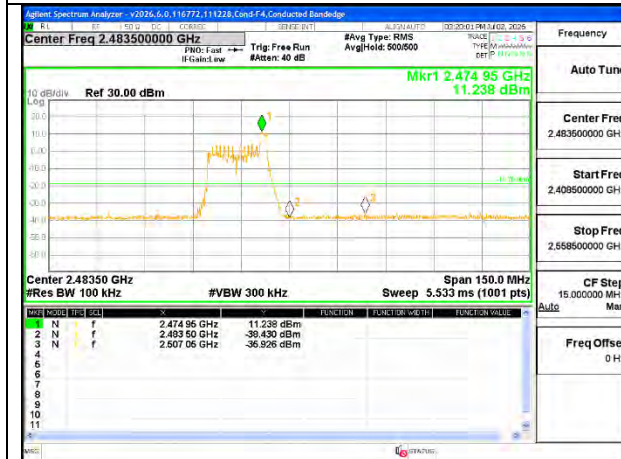


HIGH CHANNEL 12 BANDEDGE

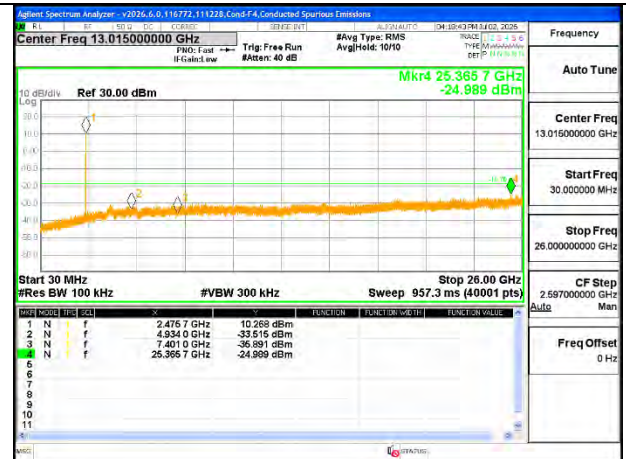


OUT-OF-BAND HIGH CHANNEL 12









HIGH CHANNEL 13 BANDEDGE

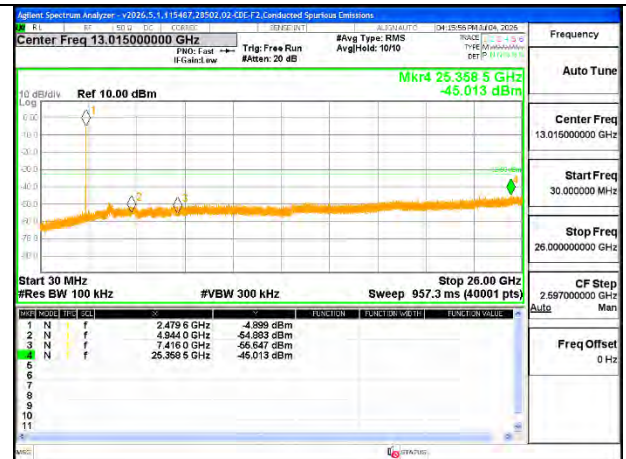


OUT-OF-BAND HIGH CHANNEL 13

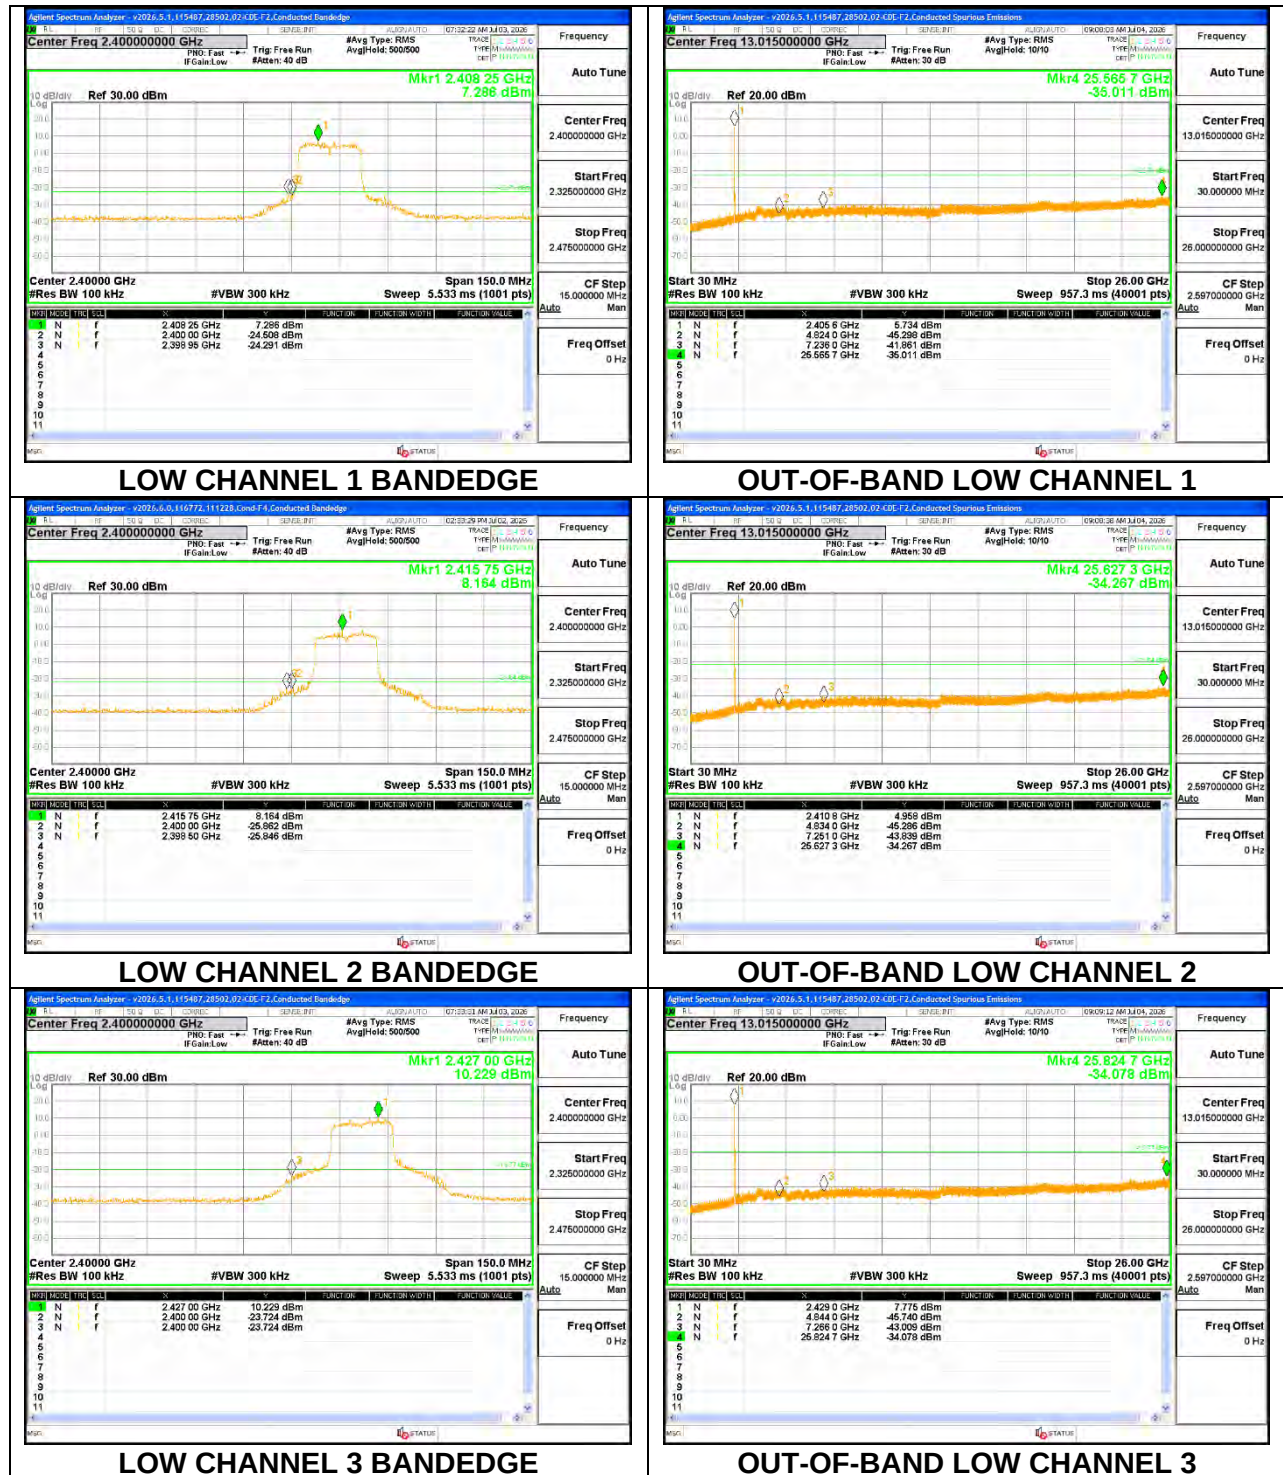1TX ANT 3 MODE, SU Mode

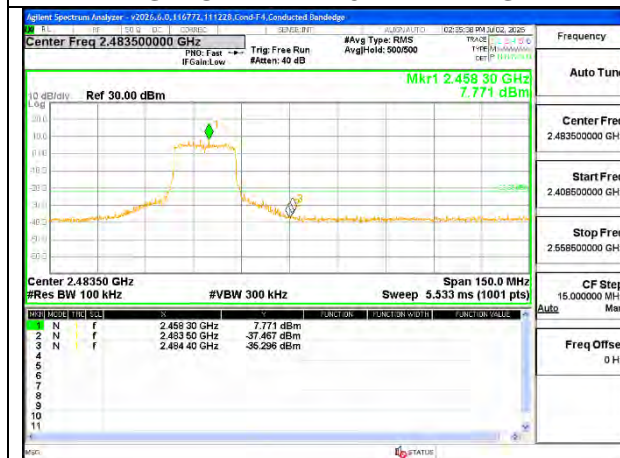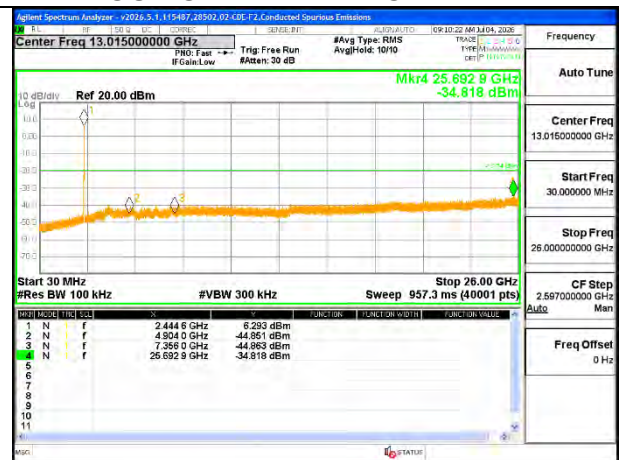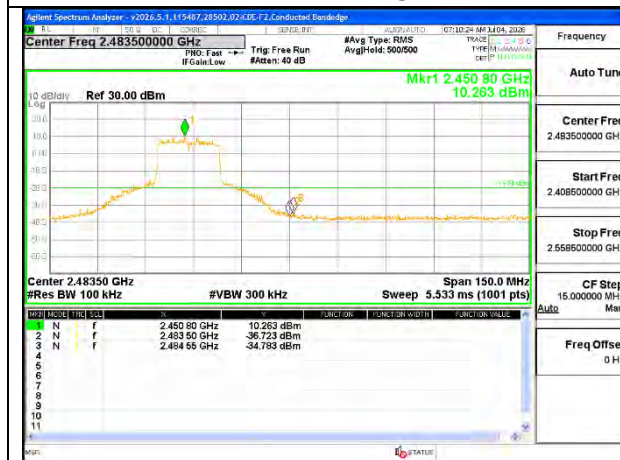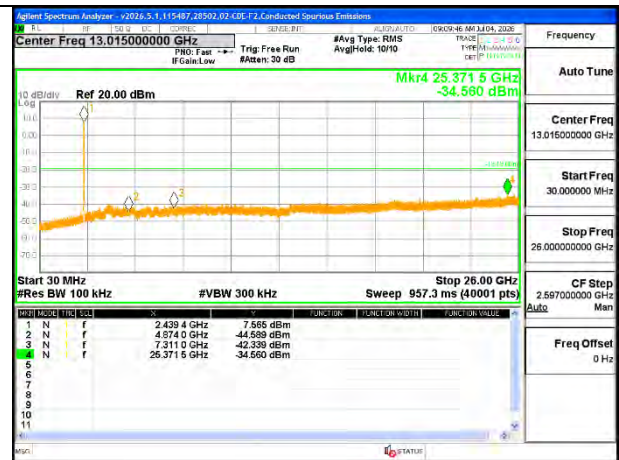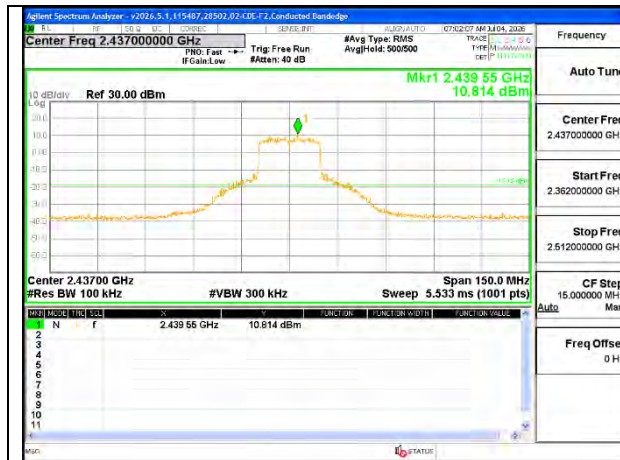

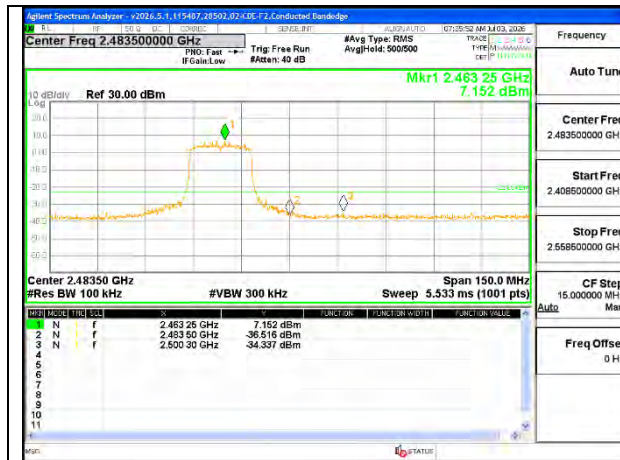


HIGH CHANNEL 11 BANDEDGE

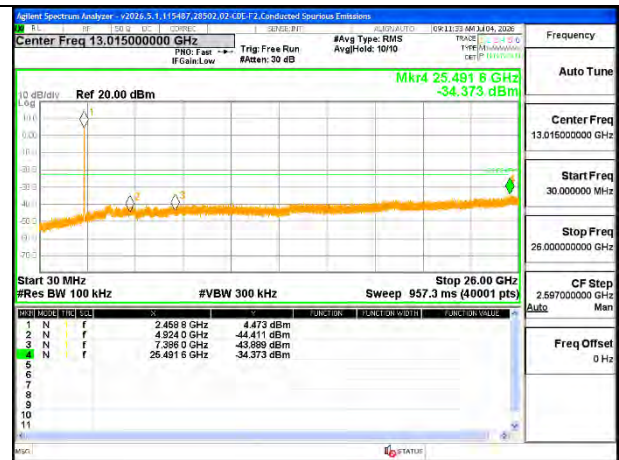

OUT-OF-BAND HIGH CHANNEL 11



HIGH CHANNEL 12 BANDEDGE

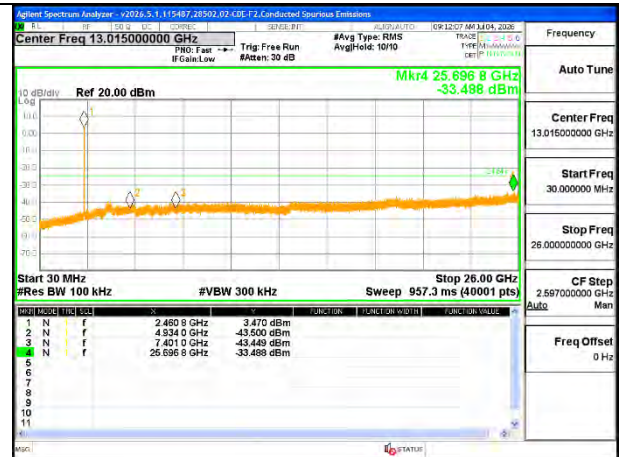

OUT-OF-BAND HIGH CHANNEL 12




HIGH CHANNEL 13 BANDEDGE




OUT-OF-BAND HIGH CHANNEL 13

8.5.6. 802.11be EHT20 2TX CDD MODE


2TX ANT 4 MODE, 26-Tones, RU Index 0

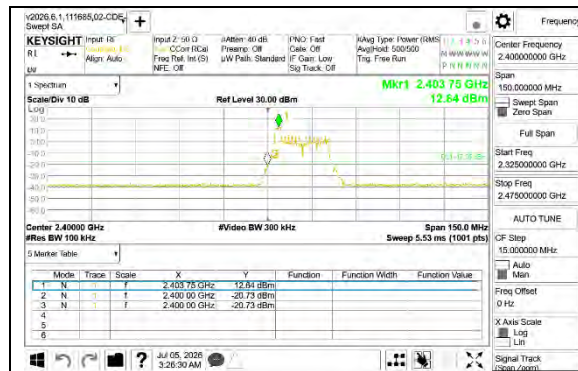

LOW CHANNEL 1 BANDEDGE

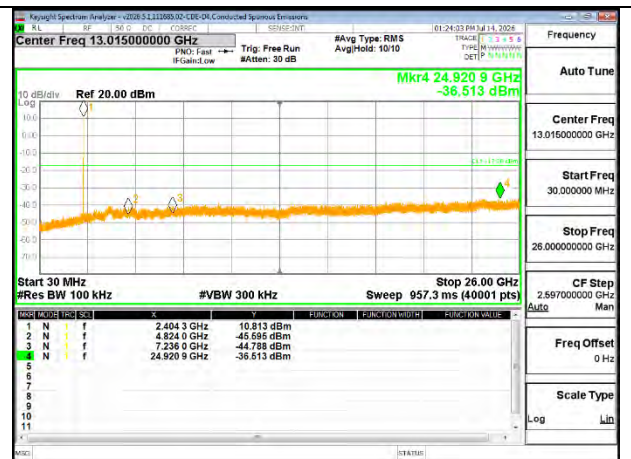

OUT-OF-BAND LOW CHANNEL 1

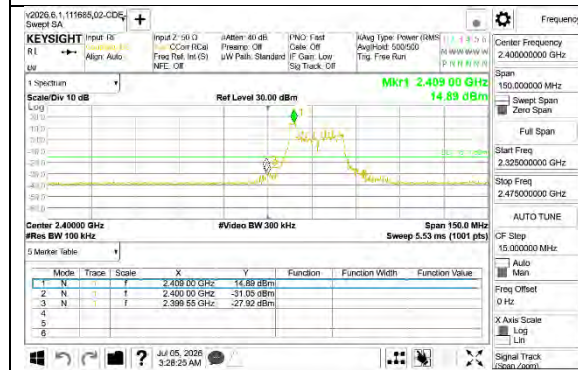

LOW CHANNEL 2 BANDEDGE



OUT-OF-BAND LOW CHANNEL 2




LOW CHANNEL 3 BANDEDGE



OUT-OF-BAND LOW CHANNEL 3







LOW CHANNEL 4 BANDEGE

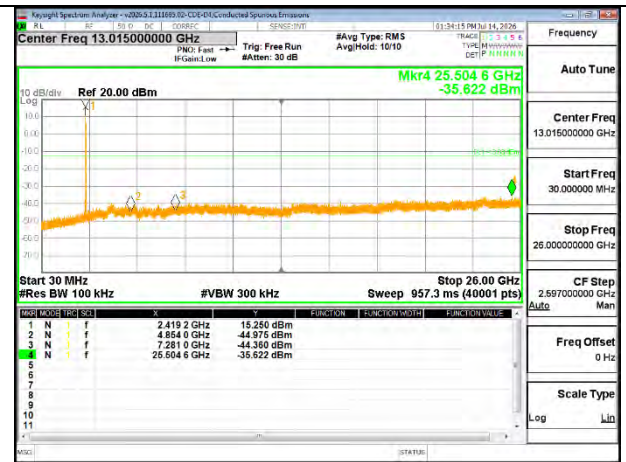


OUT-OF-BAND LOW CHANNEL 4


2TX ANT 4 MODE, 26-Tones, RU Index 4

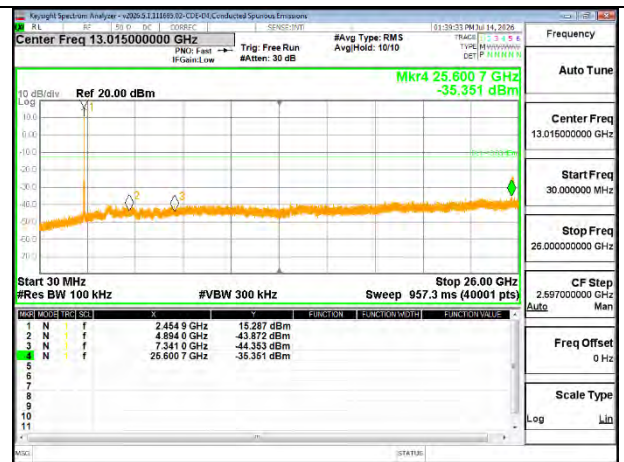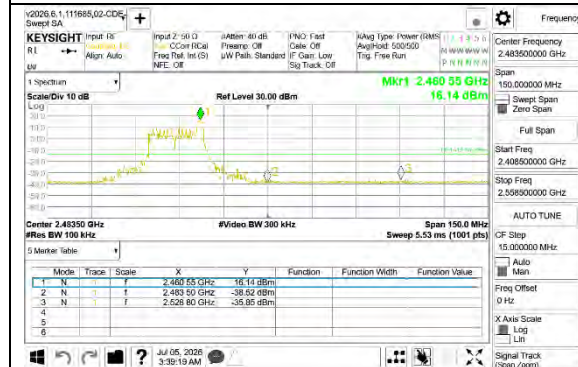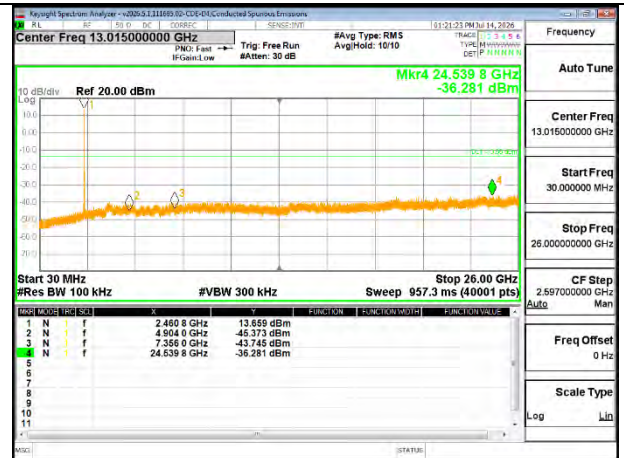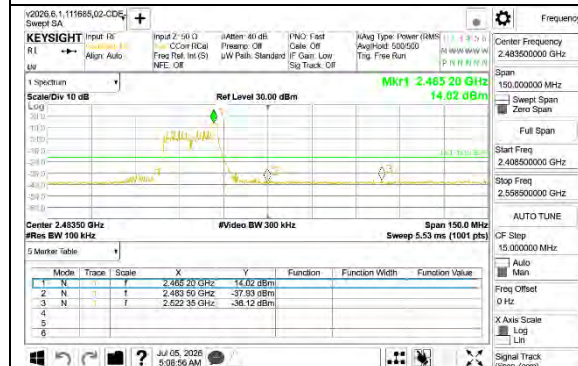


2TX ANT 4 MODE, 26-Tones, RU Index 8**HIGH CHANNEL 8 BANDEDGE****OUT-OF-BAND HIGH CHANNEL 8****HIGH CHANNEL 9 BANDEDGE****OUT-OF-BAND HIGH CHANNEL 9****HIGH CHANNEL 10 BANDEDGE****OUT-OF-BAND HIGH CHANNEL 10**

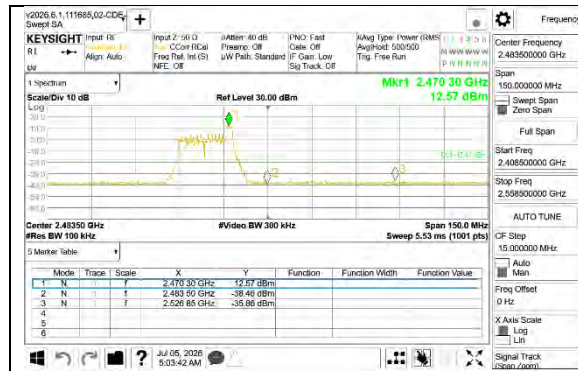


HIGH CHANNEL 11 BANDEDGE

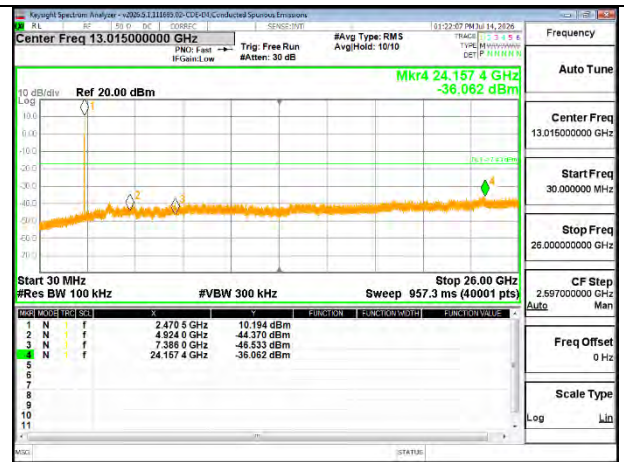

OUT-OF-BAND HIGH CHANNEL 11

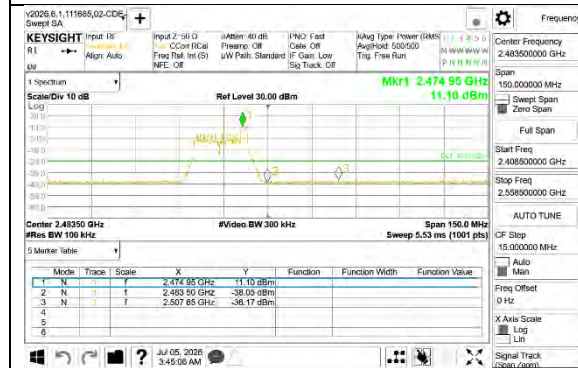


HIGH CHANNEL 12 BANDEDGE

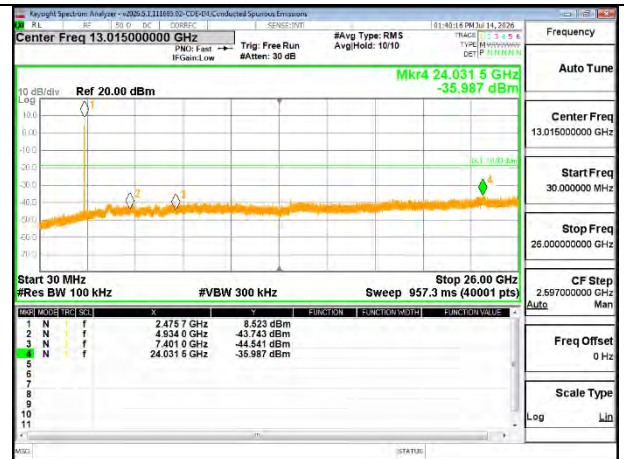





OUT-OF-BAND HIGH CHANNEL 12




HIGH CHANNEL 13 BANDEDGE

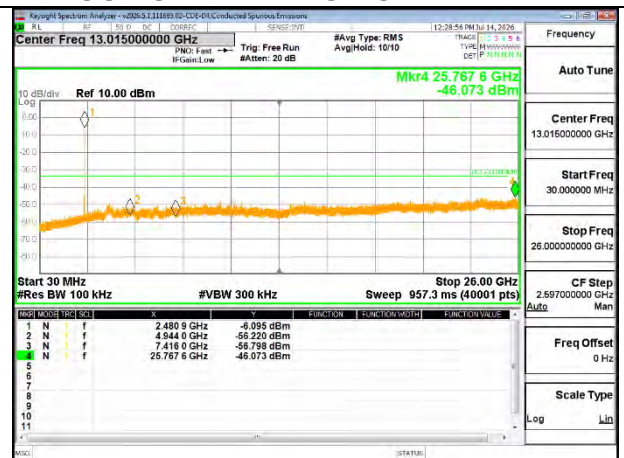

OUT-OF-BAND HIGH CHANNEL 13

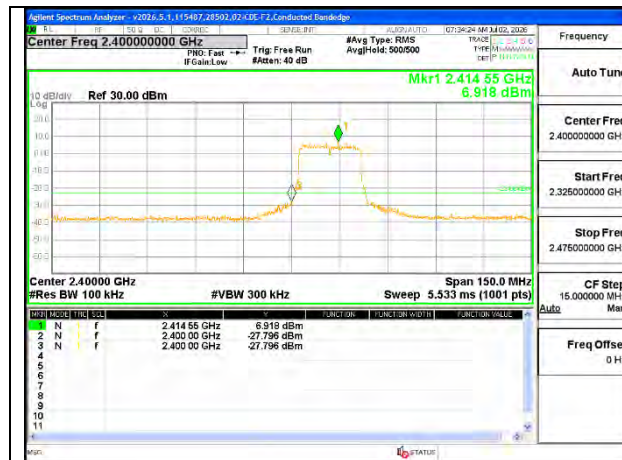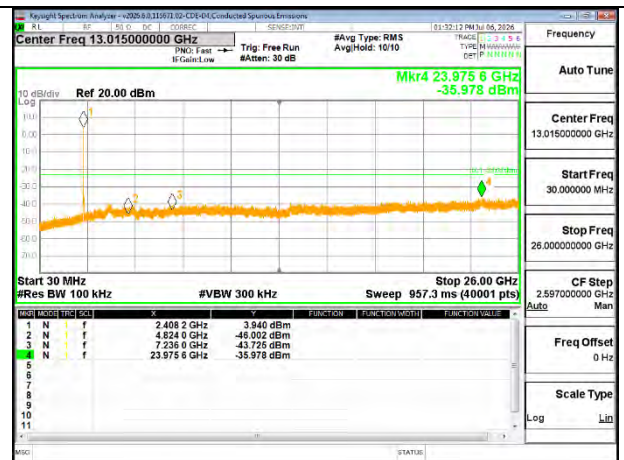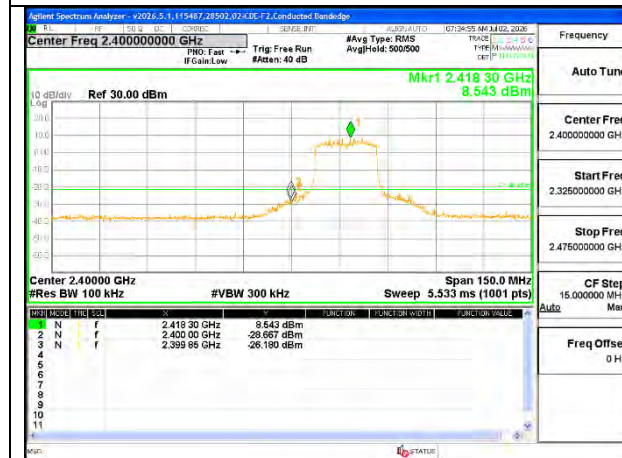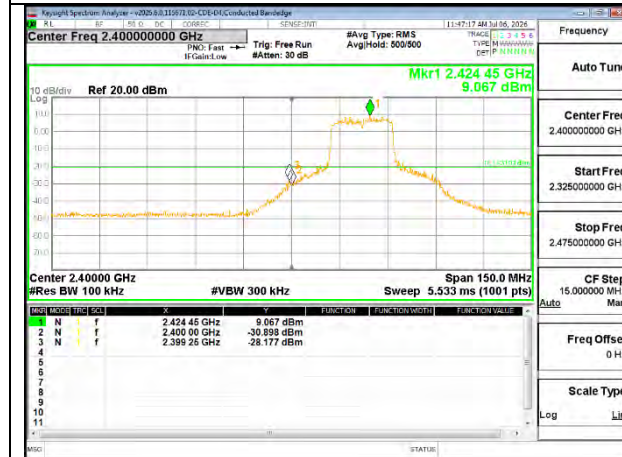
2TX ANT 4 MODE, SU Mode**LOW CHANNEL 1 BANDEDGE****OUT-OF-BAND LOW CHANNEL 1****LOW CHANNEL 2 BANDEDGE****OUT-OF-BAND LOW CHANNEL 2****LOW CHANNEL 3 BANDEDGE****OUT-OF-BAND LOW CHANNEL 3**

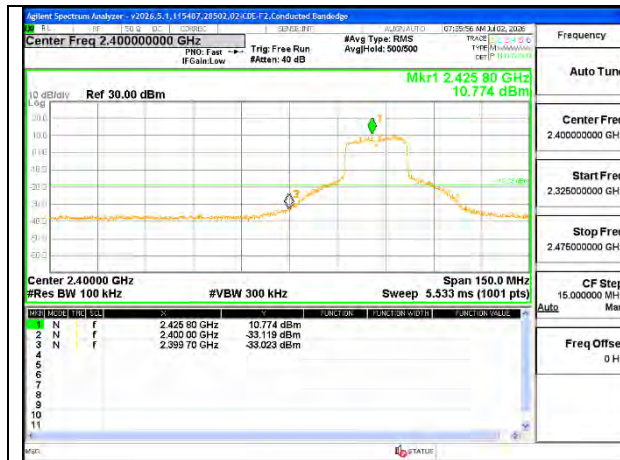


LOW CHANNEL 4 BANDEDGE



OUT-OF-BAND LOW CHANNEL 4

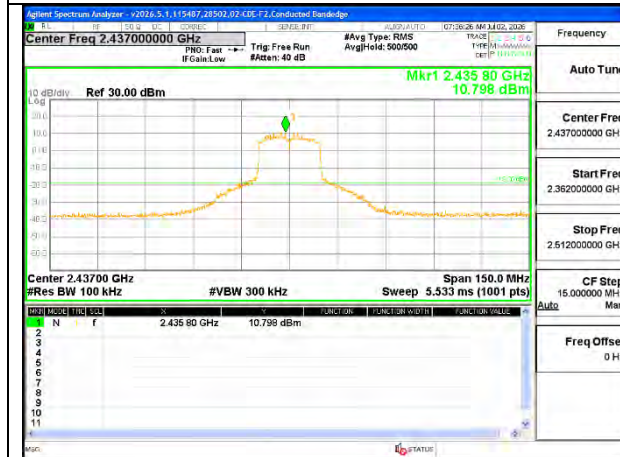


IN-BAND REFERENCE LEVEL

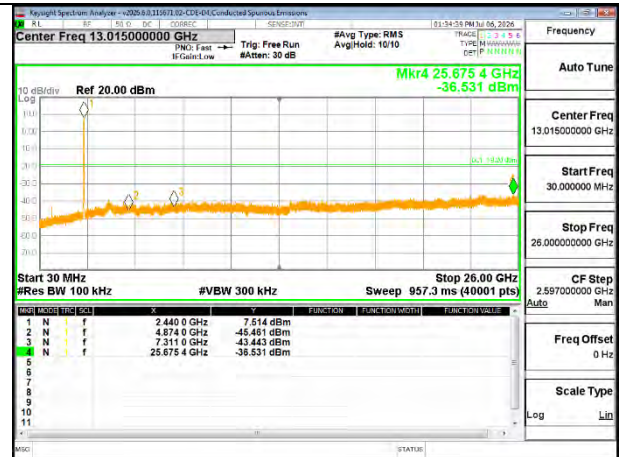


OUT-OF-BAND MID CHANNEL




HIGH CHANNEL 8 BANDEDGE

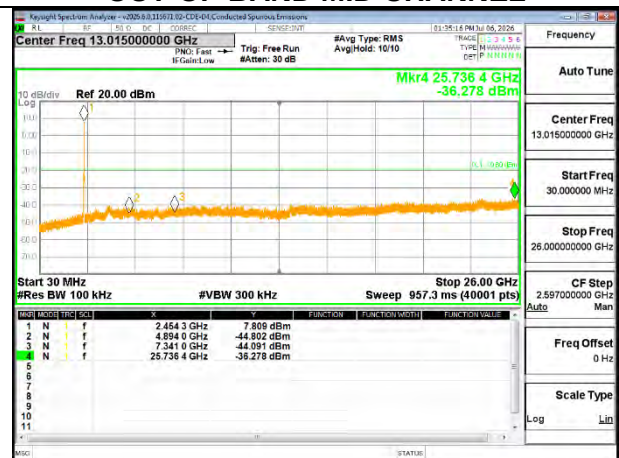


OUT-OF-BAND HIGH CHANNEL 8

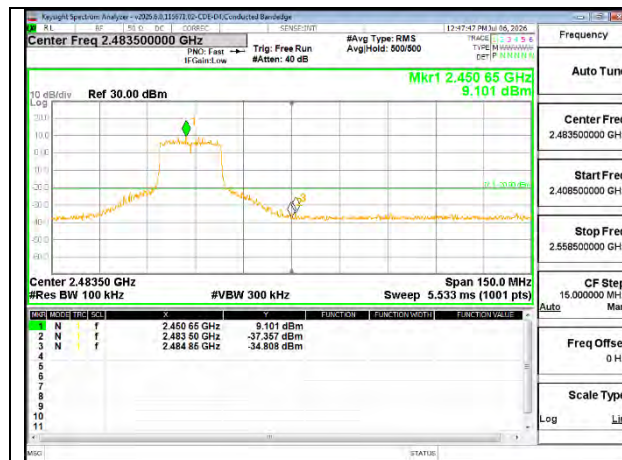


HIGH CHANNEL 9 BANDEDGE

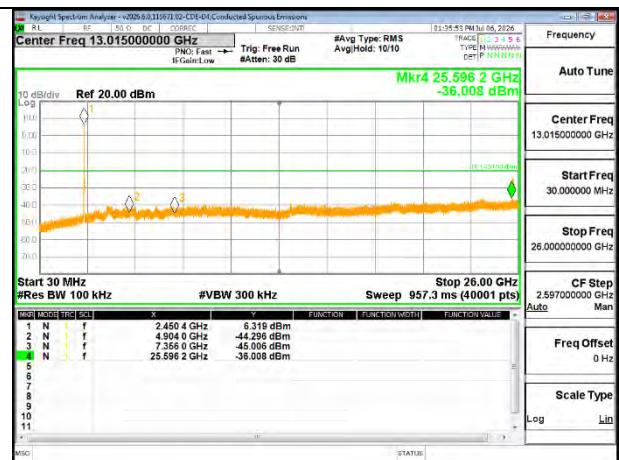

OUT-OF-BAND HIGH CHANNEL 9

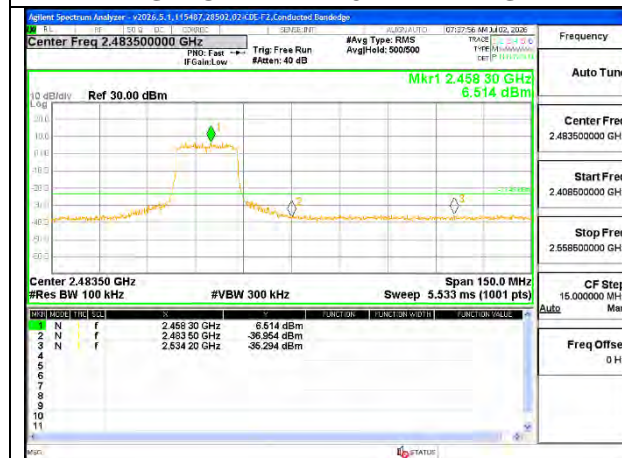


HIGH CHANNEL 10 BANDEDGE

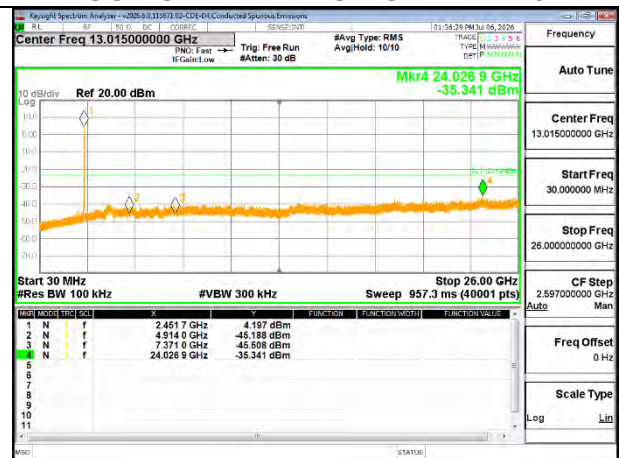

OUT-OF-BAND HIGH CHANNEL 10




HIGH CHANNEL 11 BANDEDGE

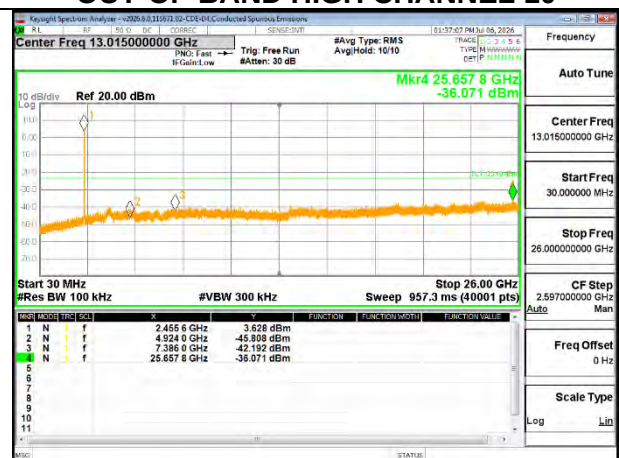

OUT-OF-BAND HIGH CHANNEL 11



HIGH CHANNEL 12 BANDEDGE

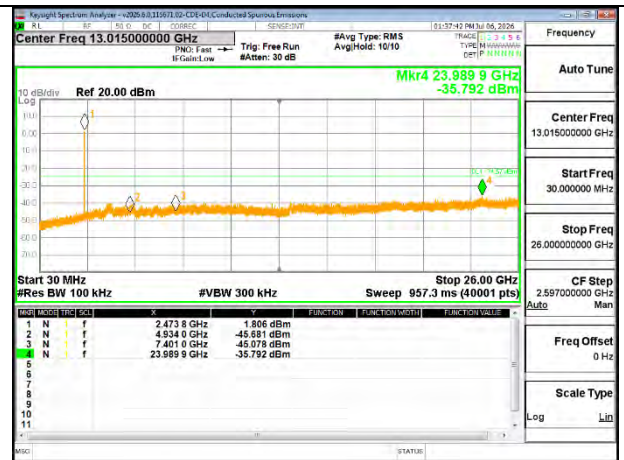







OUT-OF-BAND HIGH CHANNEL 12




HIGH CHANNEL 13 BANDEDGE






OUT-OF-BAND HIGH CHANNEL 13

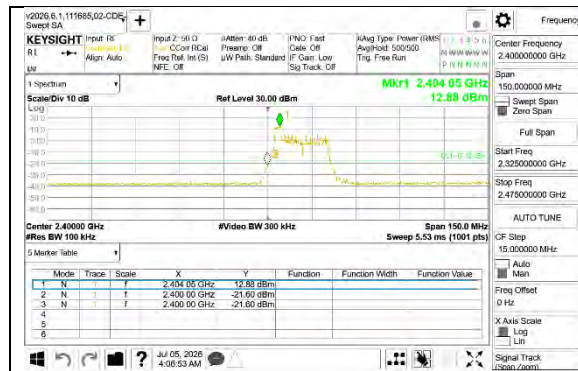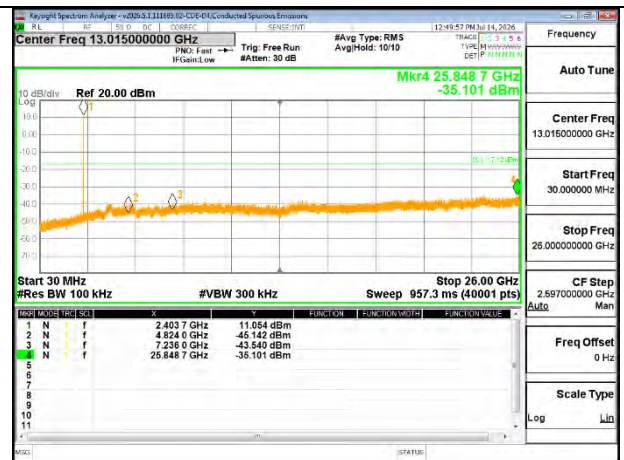
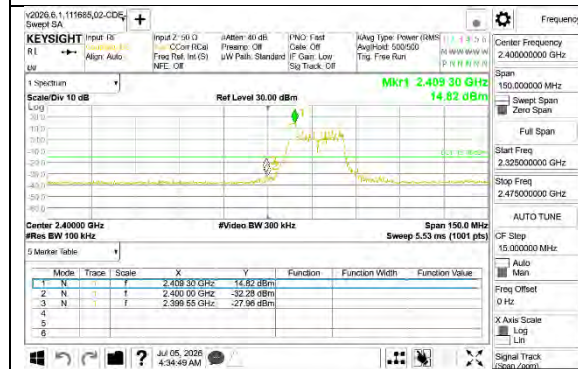
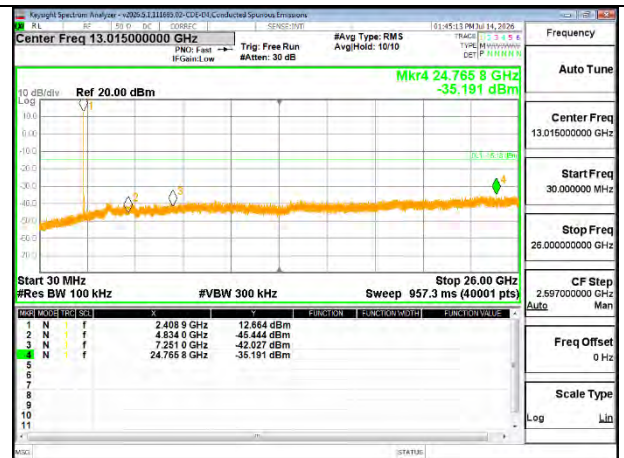
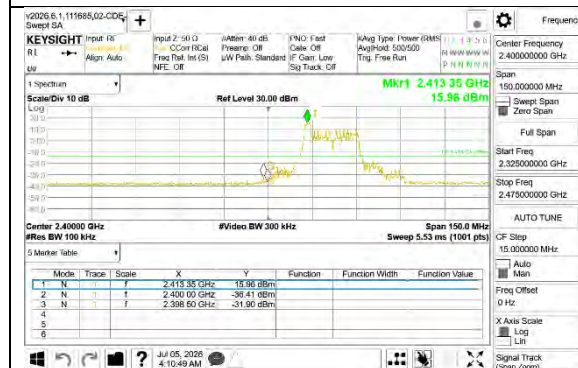
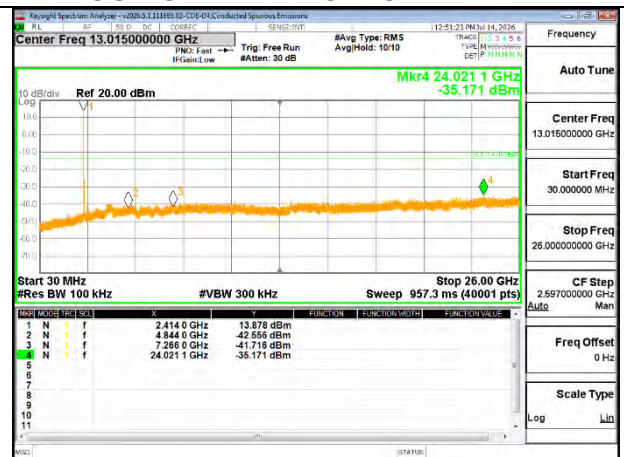
2TX ANT 3 MODE, 26-Tones, RU Index 0**LOW CHANNEL 1 BANDEDGE****OUT-OF-BAND LOW CHANNEL 1****LOW CHANNEL 2 BANDEDGE****OUT-OF-BAND LOW CHANNEL 2****LOW CHANNEL 3 BANDEDGE****OUT-OF-BAND LOW CHANNEL 3**




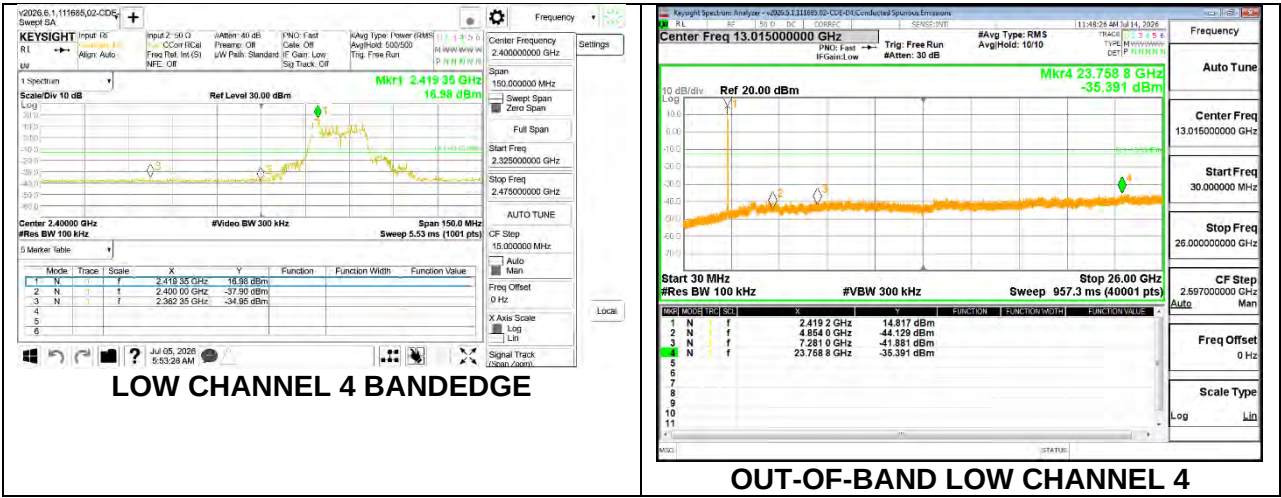



2TX ANT 3 MODE, 26-Tones, RU Index 4

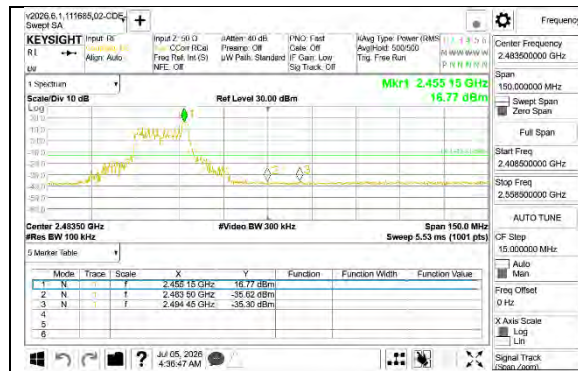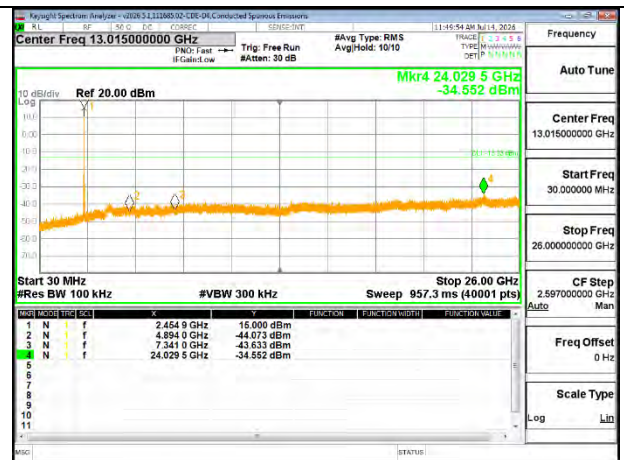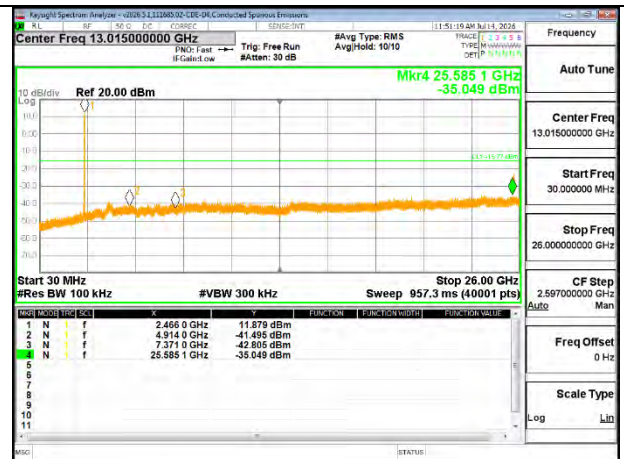


2TX ANT 3 MODE, 26-Tones, RU Index 8**HIGH CHANNEL 8 BANDEDGE****OUT-OF-BAND HIGH CHANNEL 8****HIGH CHANNEL 9 BANDEDGE****OUT-OF-BAND HIGH CHANNEL 9****HIGH CHANNEL 10 BANDEDGE****OUT-OF-BAND HIGH CHANNEL 10**

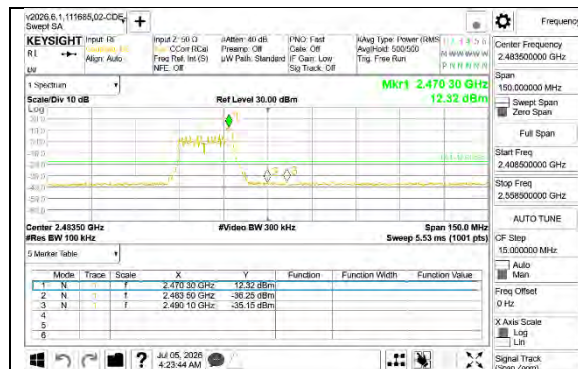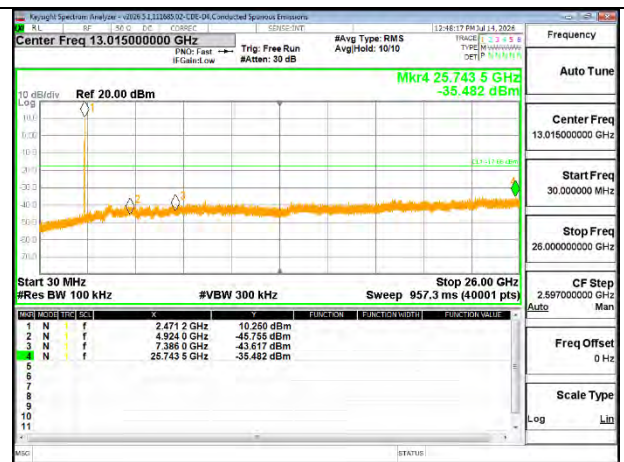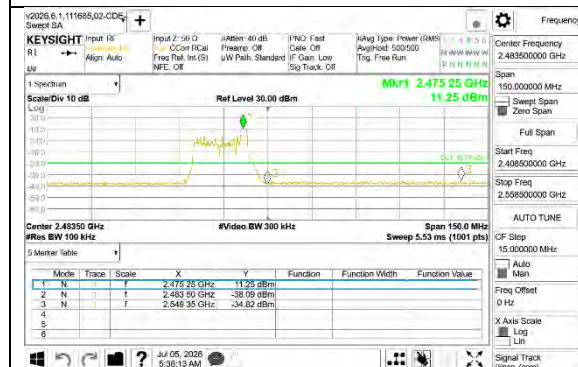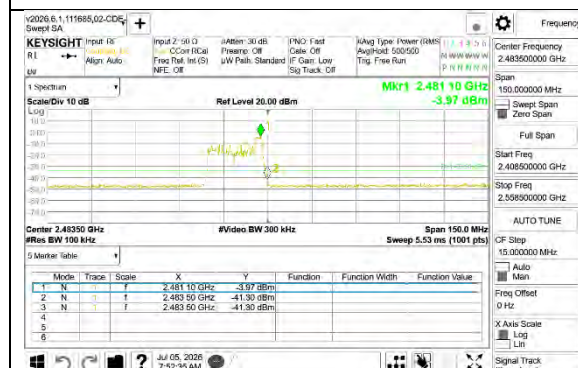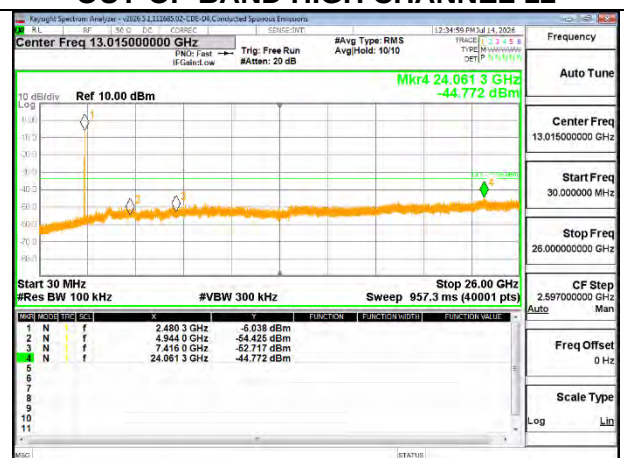**HIGH CHANNEL 11 BANDEDGE****OUT-OF-BAND HIGH CHANNEL 11****HIGH CHANNEL 12 BANDEDGE****OUT-OF-BAND HIGH CHANNEL 12****HIGH CHANNEL 13 BANDEDGE****OUT-OF-BAND HIGH CHANNEL 13**

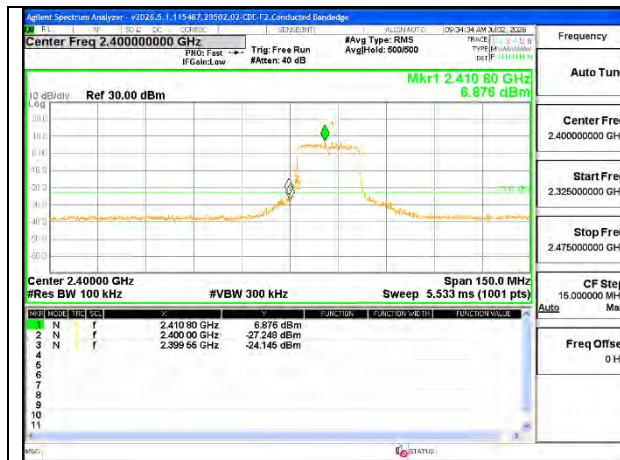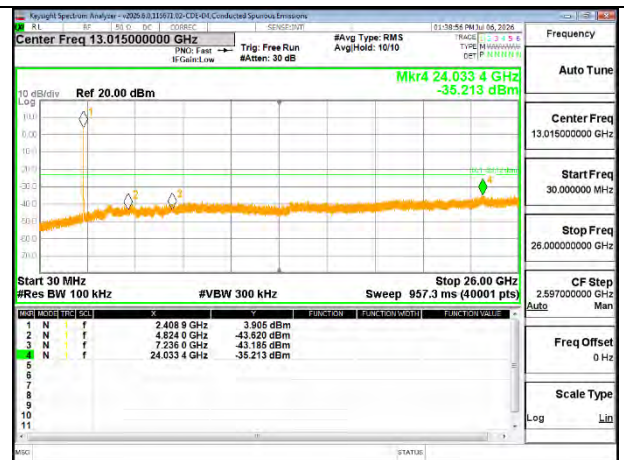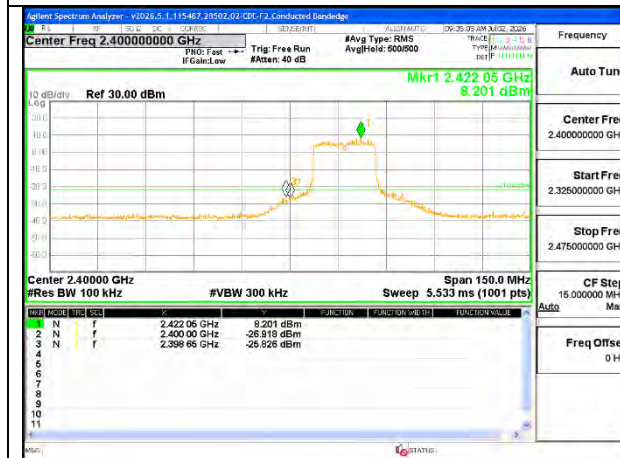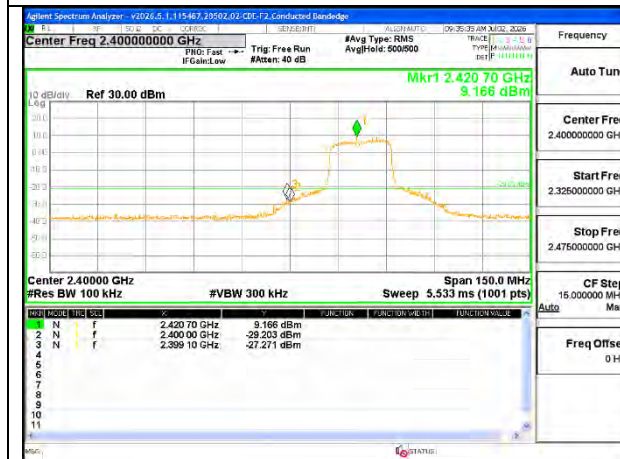2TX ANT 3 MODE, SU Mode**LOW CHANNEL 1 BANDEDGE****OUT-OF-BAND LOW CHANNEL 1****LOW CHANNEL 2 BANDEDGE****OUT-OF-BAND LOW CHANNEL 2****LOW CHANNEL 3 BANDEDGE****OUT-OF-BAND LOW CHANNEL 3**

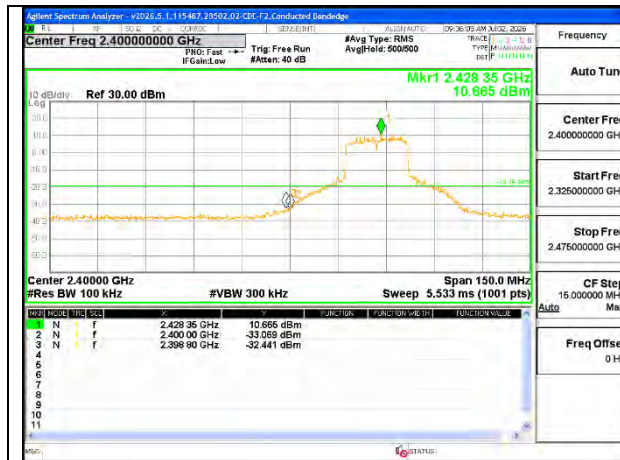


LOW CHANNEL 4 BANDEDGE

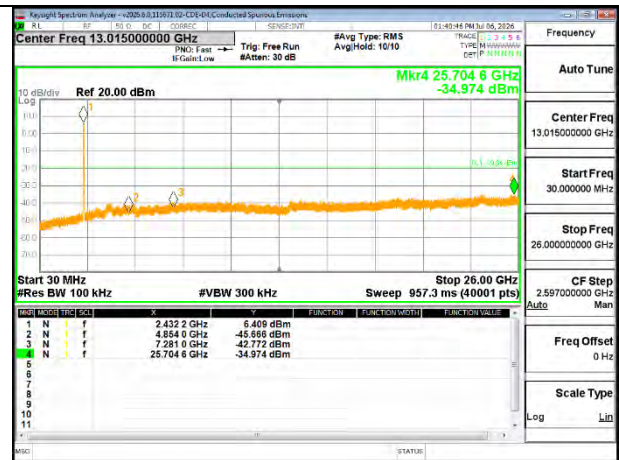


OUT-OF-BAND LOW CHANNEL 4



IN-BAND REFERENCE LEVEL

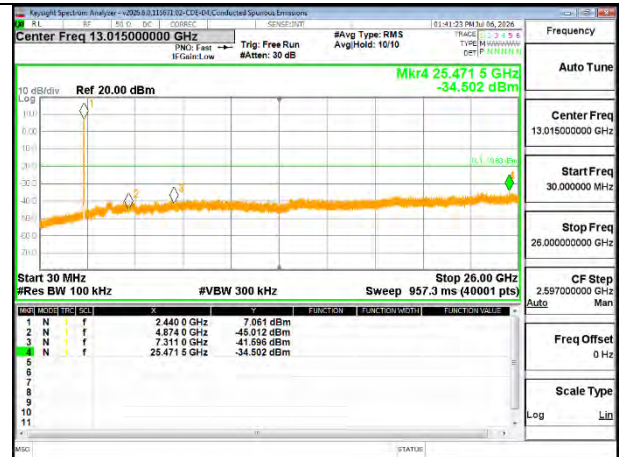

OUT-OF-BAND MID CHANNEL

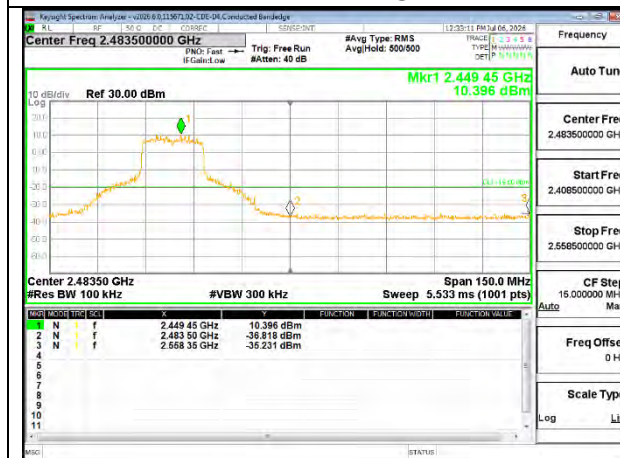

HIGH CHANNEL 8 BANDEDGE




OUT-OF-BAND HIGH CHANNEL 8




HIGH CHANNEL 9 BANDEDGE




OUT-OF-BAND HIGH CHANNEL 9

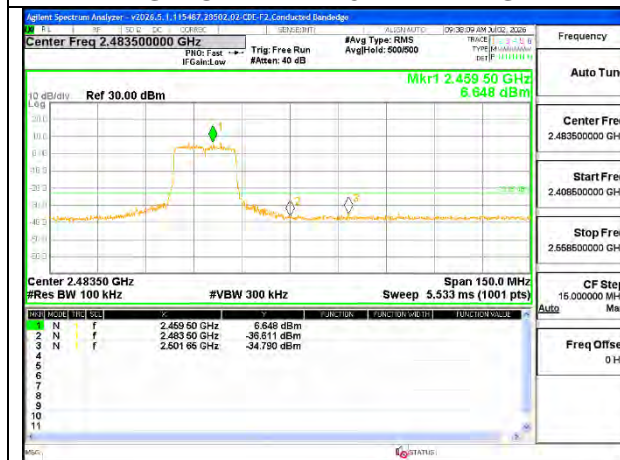

HIGH CHANNEL 10 BANDEDGE

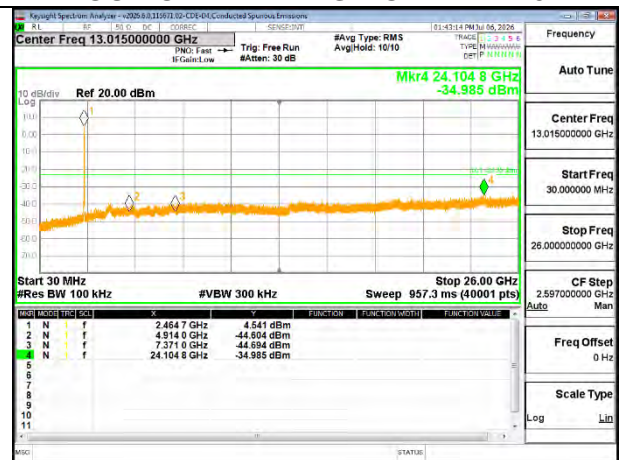

OUT-OF-BAND HIGH CHANNEL 10

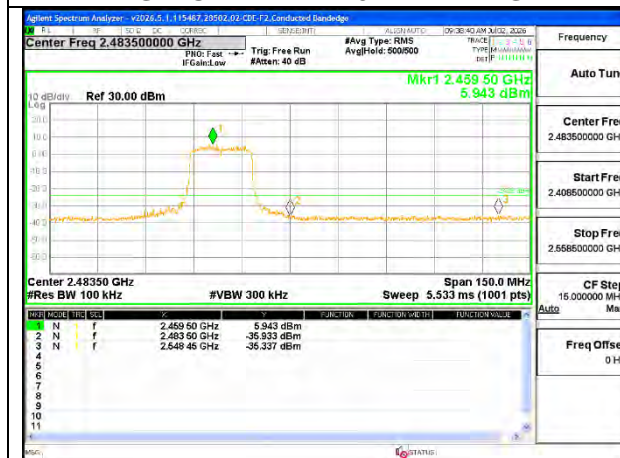


HIGH CHANNEL 11 BANDEDGE



OUT-OF-BAND HIGH CHANNEL 11



HIGH CHANNEL 12 BANDEDGE

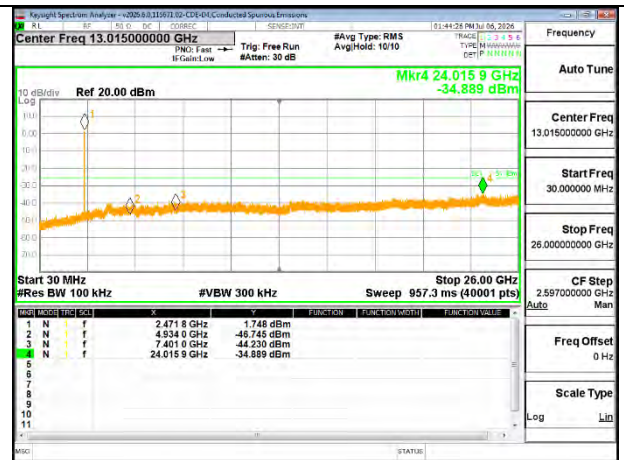

OUT-OF-BAND HIGH CHANNEL 12



HIGH CHANNEL 13 BANDEDGE



OUT-OF-BAND HIGH CHANNEL 13

9. RADIATED TEST RESULTS

LIMITS

FCC §15.205 and §15.209
RSS-GEN, Section 8.9 and 8.10

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
0.009-0.490	2400/F(kHz) @ 300 m	-
0.490-1.705	24000/F(kHz) @ 30 m	-
1.705 - 30	30 @ 30m	-
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

Radiated emissions non-restricted frequency bands	ANSI C63.10 Subclause -11.11 and 13
Radiated emissions restricted frequency bands	ANSI C63.10 Subclause -11.12.1 and 13
Band-edge	ANSI C63.10 Subclause -11.12.2.4 and 13: Peak Measurement
Band-edge	ANSI C63.10 Subclause -11.12.2.5 and 13: Average Measurement
Radiated Spurious Emissions Below 30MHz	ANSI C63.10 Subclause 6.4 and 13

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz, the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as a quasi-peak.

For pre-scans above 1 GHz, the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 30 kHz for peak measurements.

For final measurements above 1 GHz, the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements and as applicable for average measurements.

The spectrum from 1 GHz to 18 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each applicable band. Below 1GHz and above 18GHz emissions, the channel with the highest output power was tested.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

Note: The limits in CFR 47, Part 15, Subpart C, paragraph 15.209(a), are identical to those in RSS-Gen section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using free space impedance of 377

Ohms. For example, the measurement at frequency X kHz resulted in a level of Y dBuV/m, which is equivalent to $Y-51.5 = Z$ dBuA/m, which has the same margin, W dB to the corresponding RSS-Gen Table 6 limit as the 15.209(a) limit.

KDB 414788 Open Field Site (OFS) and Chamber Correlation Justification

Based on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed, and the measured test result is the worst-case test result.

RESULTS

The plots in these sections are for reference settings only for different bandwidths and different antennas.

9.1. TRANSMITTER ABOVE 1 GHz**9.1.1. 802.11b/n/be SISO MODE – LOW BANDEDGE – CHANNEL 1**

State A

DTS (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
b-Mode	2412	4	* 2.39	61.14	Pk	32.1	0	-40.3	52.94	-	-	74	-21.06	165	193	H
			* 2.318588	63.74	Pk	31.8	0	-40.54	55	-	-	74	-19	165	193	H
			* 2.39	49.43	RMS	32.1	0	-40.3	41.23	54	-12.77	-	-	165	193	H
			* 2.384541	50.91	RMS	32.1	0	-40.1	42.91	54	-11.09	-	-	165	193	H
			* 2.39	60.37	Pk	32.1	0	-40.3	52.17	-	-	74	-21.83	243	124	V
			* 2.35377	63.45	Pk	32	0	-40	55.45	-	-	74	-18.55	243	124	V
			* 2.39	50.9	RMS	32.1	0	-40.3	42.7	54	-11.3	-	-	243	124	V
			* 2.386827	51.02	RMS	32.1	0	-40.12	43	54	-11	-	-	243	124	V
		3	* 2.39	61.62	Pk	32.1	0	-40.3	53.42	-	-	74	-20.58	179	189	H
			* 2.3531	62.66	Pk	32	0	-40	54.66	-	-	74	-19.34	179	189	H
			* 2.39	49.91	RMS	32.1	0	-40.3	41.71	54	-12.29	-	-	179	189	H
			* 2.373537	51.14	RMS	32.1	0	-40.3	42.94	54	-11.06	-	-	179	189	H
			* 2.39	61.25	Pk	32.1	0	-40.3	53.05	-	-	74	-20.95	104	250	V
			* 2.359607	63.11	Pk	32	0	-40.26	54.85	-	-	74	-19.15	104	250	V
			* 2.39	50.07	RMS	32.1	0	-40.3	41.87	54	-12.13	-	-	104	250	V
			* 2.386841	50.98	RMS	32.1	0	-40.12	42.96	54	-11.04	-	-	104	250	V
HT20	2412	4	* 2.39	62.16	Pk	32.2	0	-36.5	57.86	-	-	74	-16.14	13	107	H
			* 2.389953	63.49	Pk	32.2	0	-36.5	59.19	-	-	74	-14.81	13	107	H
			* 2.39	47.08	RMS	32.2	0	-36.5	42.78	54	-11.22	-	-	13	107	H
			* 2.389903	48.09	RMS	32.2	0	-36.5	43.79	54	-10.21	-	-	13	107	H
			* 2.39	63.04	Pk	32.2	0	-36.5	58.74	-	-	74	-15.26	106	374	V
			* 2.389265	62.99	Pk	32.2	0	-36.5	58.69	-	-	74	-15.31	106	374	V
			* 2.39	47.33	RMS	32.2	0	-36.5	43.03	54	-10.97	-	-	106	374	V
			* 2.38992	47.5	RMS	32.2	0	-36.5	43.2	54	-10.8	-	-	106	374	V
		3	* 2.39	74.33	Pk	32.2	0	-38.9	67.63	-	-	74	-6.37	129	190	H
			* 2.389519	75.41	Pk	32.2	0	-38.9	68.71	-	-	74	-5.29	129	190	H
			* 2.39	55.83	RMS	32.2	0	-38.9	49.13	54	-4.87	-	-	129	190	H
			* 2.389985	57.34	RMS	32.2	0	-38.9	50.64	54	-3.36	-	-	129	190	H
			* 2.39	72.8	Pk	32.2	0	-38.9	66.1	-	-	74	-7.9	24	263	V
			* 2.389898	75.3	Pk	32.2	0	-38.9	68.6	-	-	74	-5.4	24	263	V
			* 2.39	55.61	RMS	32.2	0	-38.9	48.91	54	-5.09	-	-	24	263	V
			* 2.389694	56.04	RMS	32.2	0	-38.9	49.34	54	-4.66	-	-	24	263	V
EHT20 (SU Mode)	2412	4	* 2.39	74.63	Pk	32.3	0	-40.2	66.73	-	-	74	-7.27	348	275	H
			* 2.389811	77.01	Pk	32.3	0	-40.2	69.11	-	-	74	-4.89	348	275	H
			* 2.39	56.46	RMS	32.3	0	-40.2	48.56	54	-5.44	-	-	348	275	H
			* 2.389898	58.14	RMS	32.3	0	-40.2	50.24	54	-3.76	-	-	348	275	H
			* 2.39	76.11	Pk	32.3	0	-40.2	68.21	-	-	74	-5.79	103	139	V
			* 2.39	76.15	Pk	32.3	0	-40.2	68.25	-	-	74	-5.75	103	139	V
			* 2.39	54.88	RMS	32.3	0	-40.2	46.98	54	-7.02	-	-	103	139	V
			* 2.389927	56.5	RMS	32.3	0	-40.2	48.6	54	-5.4	-	-	103	139	V
		3	* 2.39	71.64	Pk	32.3	0	-37.67	66.27	-	-	74	-7.73	8	363	H
			* 2.389869	74.49	Pk	32.3	0	-37.67	69.12	-	-	74	-4.88	8	363	H
			* 2.39	54.07	RMS	32.3	0	-37.67	48.7	54	-5.3	-	-	8	363	H
			* 2.38968	54.41	RMS	32.3	0	-37.67	49.04	54	-4.96	-	-	8	363	H
			* 2.39	66.16	Pk	32.3	0	-37.67	60.79	-	-	74	-13.21	274	326	V
			* 2.389403	71.33	Pk	32.3	0	-37.67	65.96	-	-	74	-8.04	274	326	V
			* 2.39	51.66	RMS	32.3	0	-37.67	46.29	54	-7.71	-	-	274	326	V
			* 2.389971	52.1	RMS	32.3	0	-37.67	46.73	54	-7.27	-	-	274	326	V
EHT20 (RU 26 / Index 0)	2412	4	* 2.39	66.17	Pk	32.1	0	-34.83	63.44	-	-	74	-10.56	240	181	H
			* 2.389781	67.25	Pk	32.1	0	-34.83	64.52	-	-	74	-9.48	240	181	H
			* 2.39	48.95	RMS	32.1	0	-34.83	46.22	54	-7.78	-	-	240	181	H
			* 2.382955	49.93	RMS	32	0	-34.78	47.15	54	-6.85	-	-	240	181	H
			* 2.39	59.57	Pk	32.1	0	-34.83	56.84	-	-	74	-17.16	237	334	V
			* 2.31425	62.12	Pk	31.8	0	-34.85	59.07	-	-	74	-14.93	237	334	V
			* 2.39	48.42	RMS	32.1	0	-34.83	45.69	54	-8.31	-	-	237	334	V
			* 2.384862	49.66	RMS	32	0	-34.81	46.85	54	-7.15	-	-	237	334	V
		3	* 2.39	66.12	Pk	32.1	0	-34.83	63.39	-	-	74	-10.61	176	272	H
			* 2.389825	67.35	Pk	32.1	0	-34.83	64.62	-	-	74	-9.38	176	272	H
			* 2.39	48.56	RMS	32.1	0	-34.83	45.83	54	-8.17	-	-	176	272	H
			* 2.388108	50.37	RMS	32	0	-34.84	47.53	54	-6.47	-	-	176	272	H
			* 2.39	62.95	Pk	32.1	0	-34.83	60.22	-	-	74	-13.78	121	302	V
			* 2.389971	65.28	Pk	32.1	0	-34.83	62.55	-	-	74	-11.45	121	302	V
			* 2.39	48.32	RMS	32.1	0	-34.83	45.59	54	-8.41	-	-	121	302	V
			* 2.388777	49.79	RMS	32.1	0	-34.84	47.05	54	-6.95	-	-	121	302	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

State B

DTS (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
b-Mode	2412	4	* 2.39	53.35	Pk	32.3	0	-34.8	50.85	-	-	74	-23.15	103	340	H
			* 2.326393	56.58	Pk	31.9	0	-35	53.48	-	-	74	-20.52	103	340	H
			* 2.39	42.5	RMS	32.3	0	-34.8	40	54	-14	-	-	103	340	H
			* 2.38725	44.15	RMS	32.3	0	-34.8	41.65	54	-12.35	-	-	103	340	H
			* 2.39	53.8	Pk	32.3	0	-34.8	51.3	-	-	74	-22.7	218	344	V
			* 2.388315	56.85	Pk	32.3	0	-34.8	54.35	-	-	74	-19.65	218	344	V
			* 2.39	43.5	RMS	32.3	0	-34.8	41	54	-13	-	-	218	344	V
			* 2.38879	44.33	RMS	32.3	0	-34.8	41.83	54	-12.17	-	-	218	344	V
		3	* 2.39	53.86	Pk	32.3	0	-34.8	51.36	-	-	74	-22.64	143	378	H
			* 2.362341	56.72	Pk	32	0	-34.9	53.82	-	-	74	-20.18	143	378	H
			* 2.39	43.15	RMS	32.3	0	-34.8	40.65	54	-13.35	-	-	143	378	H
			* 2.386792	44.18	RMS	32.3	0	-34.8	41.68	54	-12.32	-	-	143	378	H
			* 2.39	55.25	Pk	32.3	0	-34.8	52.75	-	-	74	-21.25	247	386	V
			* 2.376294	55.95	Pk	32.2	0	-34.9	53.25	-	-	74	-20.75	247	386	V
			* 2.39	43.11	RMS	32.3	0	-34.8	40.61	54	-13.39	-	-	247	386	V
			* 2.388249	44.27	RMS	32.3	0	-34.8	41.77	54	-12.23	-	-	247	386	V
HT20	2412	4	* 2.39	68.47	Pk	32.2	0	-38.9	61.77	-	-	74	-12.23	358	133	H
			* 2.389825	71.51	Pk	32.2	0	-38.9	64.81	-	-	74	-9.19	358	133	H
			* 2.39	53.86	RMS	32.2	0	-38.9	47.16	54	-6.84	-	-	358	133	H
			* 2.389854	54.05	RMS	32.2	0	-38.9	47.35	54	-6.65	-	-	358	133	H
			* 2.39	60.02	Pk	32.2	0	-38.9	53.32	-	-	74	-20.68	289	388	V
			* 2.367962	62.69	Pk	32.1	0	-38.9	55.89	-	-	74	-18.11	289	388	V
			* 2.39	48.99	RMS	32.2	0	-38.9	42.29	54	-11.71	-	-	289	388	V
			* 2.387089	50.23	RMS	32.2	0	-38.9	43.53	54	-10.47	-	-	289	388	V
		3	* 2.39	61.17	Pk	32.3	0	-34.8	58.67	-	-	74	-15.33	257	126	H
			* 2.389936	63.08	Pk	32.3	0	-34.8	60.58	-	-	74	-13.42	257	126	H
			* 2.39	46.98	RMS	32.3	0	-34.8	44.48	54	-9.52	-	-	257	126	H
			* 2.389838	47.32	RMS	32.3	0	-34.8	44.82	54	-9.18	-	-	257	126	H
			* 2.39	59.68	Pk	32.3	0	-34.8	57.18	-	-	74	-16.82	10	398	V
			* 2.389723	60.87	Pk	32.3	0	-34.8	58.37	-	-	74	-15.63	10	398	V
			* 2.39	45.32	RMS	32.3	0	-34.8	42.82	54	-11.18	-	-	10	398	V
			* 2.389887	46.18	RMS	32.3	0	-34.8	43.68	54	-10.32	-	-	10	398	V
EHT20 (SU Mode)	2412	4	* 2.39	72.79	Pk	32.3	0	-37.67	67.42	-	-	74	-6.58	239	138	H
			* 2.38885	73.98	Pk	32.3	0	-37.67	68.61	-	-	74	-5.39	239	138	H
			* 2.39	53.43	RMS	32.3	0	-37.67	48.06	54	-5.94	-	-	239	138	H
			* 2.389956	55.08	RMS	32.3	0	-37.67	49.71	54	-4.29	-	-	239	138	H
			* 2.39	63.4	Pk	32.3	0	-37.67	58.03	-	-	74	-15.97	196	304	V
			* 2.389156	65.73	Pk	32.3	0	-37.67	60.36	-	-	74	-13.64	196	304	V
			* 2.39	50.33	RMS	32.3	0	-37.67	44.96	54	-9.04	-	-	196	304	V
			* 2.389476	51.11	RMS	32.3	0	-37.67	45.74	54	-8.26	-	-	196	304	V
		3	* 2.39	72.32	Pk	32.3	0	-37.67	66.95	-	-	74	-7.05	151	145	H
			* 2.389796	74.09	Pk	32.3	0	-37.67	68.72	-	-	74	-5.28	151	145	H
			* 2.39	55.47	RMS	32.3	0	-37.67	50.1	54	-3.9	-	-	151	145	H
			* 2.389694	55.88	RMS	32.3	0	-37.67	50.51	54	-3.49	-	-	151	145	H
			* 2.39	62.69	Pk	32.3	0	-37.67	57.32	-	-	74	-16.68	269	393	V
			* 2.389898	68.39	Pk	32.3	0	-37.67	63.02	-	-	74	-10.98	269	393	V
			* 2.39	50.55	RMS	32.3	0	-37.67	45.18	54	-8.82	-	-	269	393	V
			* 2.389781	51.07	RMS	32.3	0	-37.67	45.7	54	-8.3	-	-	269	393	V
EHT20 (RU 26 / Index 0)	2412	4	* 2.39	71.28	Pk	32.3	0	-40.4	63.18	-	-	74	-10.82	16	255	H
			* 2.389883	72.03	Pk	32.3	0	-40.4	63.93	-	-	74	-10.07	16	255	H
			* 2.39	51	RMS	32.3	0	-40.4	42.9	54	-11.1	-	-	16	255	H
			* 2.389228	52.67	RMS	32.3	0	-40.4	44.57	54	-9.43	-	-	16	255	H
			* 2.39	71.68	Pk	32.3	0	-40.4	63.58	-	-	74	-10.42	239	209	V
			* 2.389811	71.94	Pk	32.3	0	-40.4	63.84	-	-	74	-10.16	239	209	V
			* 2.39	52.5	RMS	32.3	0	-40.4	44.4	54	-9.6	-	-	239	209	V
			* 2.39	52.53	RMS	32.3	0	-40.4	44.43	54	-9.57	-	-	239	209	V
		3	* 2.39	68.47	Pk	32.2	0	-38.9	61.77	-	-	74	-12.23	175	232	H
			* 2.389971	70.15	Pk	32.2	0	-38.9	63.45	-	-	74	-10.55	175	232	H
			* 2.39	51.36	RMS	32.2	0	-38.9	44.66	54	-9.34	-	-	175	232	H
			* 2.389665	51.7	RMS	32.2	0	-38.9	45	54	-9	-	-	175	232	H
			* 2.39	65.37	Pk	32.2	0	-38.9	58.67	-	-	74	-15.33	227	391	V
			* 2.39	65.37	Pk	32.2	0	-38.9	58.67	-	-	74	-15.33	227	391	V
			* 2.39	49.45	RMS	32.2	0	-38.9	42.75	54	-11.25	-	-	227	391	V
			* 2.387045	50.12	RMS	32.2	0	-38.9	43.42	54	-10.58	-	-	227	391	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

9.1.2. 802.11b/n/be MIMO CDD MODE – LOW BANDEDGE – CHANNEL 1

State A

DTS (MIMO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
b-Mode	2412	4+3	*2.39	59.62	Pk	32.2	0	-34.31	57.51	-	-	74	-16.49	41	152	H
			*2.332212	62.19	Pk	31.9	0	-34.46	59.63	-	-	74	-14.37	41	152	H
			*2.39	48.65	RMS	32.2	0	-34.31	46.54	54	-7.46	-	-	41	152	H
			*2.38147	49.59	RMS	32.2	0	-34.34	47.45	54	-6.55	-	-	41	152	H
			*2.39	59.59	Pk	32.2	0	-34.31	57.48	-	-	74	-16.52	215	290	V
			*2.313042	62.43	Pk	31.9	0	-34.45	59.88	-	-	74	-14.12	215	290	V
			*2.39	48.2	RMS	32.2	0	-34.31	46.09	54	-7.91	-	-	215	290	V
HT20	2412	4+3	*2.37377	49.6	RMS	32.1	0	-34.36	47.34	54	-6.66	-	-	215	290	V
			*2.39	76.27	Pk	32.1	0	-39.53	68.84	-	-	74	-5.16	42	114	H
			*2.389912	76.56	Pk	32.1	0	-39.53	69.13	-	-	74	-4.87	42	114	H
			*2.39	57.64	RMS	32.1	0	-39.53	50.21	54	-3.79	-	-	42	114	H
			*2.389971	58.76	RMS	32.1	0	-39.53	51.33	54	-2.67	-	-	42	114	H
			*2.39	65.64	Pk	32.1	0	-39.53	58.21	-	-	74	-15.79	12	108	V
			*2.389883	67.5	Pk	32.1	0	-39.53	60.07	-	-	74	-13.93	12	108	V
EHT20 (SU Mode)	2412	4+3	*2.39	51.27	RMS	32.1	0	-39.53	43.84	54	-10.16	-	-	12	108	V
			*2.389854	52.2	RMS	32.1	0	-39.53	44.77	54	-9.23	-	-	12	108	V
			*2.39	69.66	Pk	32.3	0	-37.67	64.29	-	-	74	-9.71	14	312	H
			*2.389694	70.42	Pk	32.3	0	-37.67	65.05	-	-	74	-8.95	14	312	H
			*2.39	55.14	RMS	32.3	0	-37.67	49.77	54	-4.23	-	-	14	312	H
			*2.39	55.15	RMS	32.3	0	-37.67	49.78	54	-4.22	-	-	14	312	H
			*2.39	64.97	Pk	32.3	0	-37.67	59.6	-	-	74	-14.4	38	357	V
EHT20 (RU 26 / Index 0)	2412	4+3	*2.389971	66.25	Pk	32.3	0	-37.67	60.88	-	-	74	-13.12	38	357	V
			*2.39	52.25	RMS	32.3	0	-37.67	46.88	54	-7.12	-	-	38	357	V
			*2.389723	52.68	RMS	32.3	0	-37.67	47.31	54	-6.69	-	-	38	357	V
			*2.39	72.15	Pk	32.3	0	-37.67	66.78	-	-	74	-7.22	14	312	H
			*2.39	72.14	Pk	32.3	0	-37.67	66.77	-	-	74	-7.23	14	312	H
			*2.39	50.46	RMS	32.3	0	-37.67	45.09	54	-8.91	-	-	14	312	H
			*2.389985	52.24	RMS	32.3	0	-37.67	46.87	54	-7.13	-	-	14	312	H
			*2.39	70.81	Pk	32.3	0	-37.67	65.44	-	-	74	-8.56	52	202	V
			*2.389985	71.11	Pk	32.3	0	-37.67	65.74	-	-	74	-8.26	52	202	V
			*2.39	51.45	RMS	32.3	0	-37.67	46.08	54	-7.92	-	-	52	202	V
			*2.389956	53.42	RMS	32.3	0	-37.67	48.05	54	-5.95	-	-	52	202	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

State B

DTS (MIMO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
b-Mode	2412	4+3	* 2.39	59.85	Pk	32	0	-34.04	57.81	-	-	74	-16.19	20	157	H
			* 2.383668	61.9	Pk	32	0	-34.09	59.81	-	-	74	-14.19	20	157	H
			* 2.39	49.07	RMS	32	0	-34.04	47.03	54	-6.97	-	-	20	157	H
			* 2.384323	49.95	RMS	32	0	-34.08	47.87	54	-6.13	-	-	20	157	H
			* 2.39	61.08	Pk	32	0	-34.04	59.04	-	-	74	-14.96	114	396	V
			* 2.37345	62.65	Pk	31.9	0	-34.1	60.45	-	-	74	-13.55	114	396	V
			* 2.39	49.3	RMS	32	0	-34.04	47.26	54	-6.74	-	-	114	396	V
			* 2.387336	50.33	RMS	32	0	-34.05	48.28	54	-5.72	-	-	114	396	V
HT20	2412	4+3	* 2.39	69.63	Pk	32.1	0	-34.83	66.9	-	-	74	-7.1	263	190	H
			* 2.389883	71.54	Pk	32.1	0	-34.83	68.81	-	-	74	-5.19	263	190	H
			* 2.39	53.43	RMS	32.1	0	-34.83	50.7	54	-3.3	-	-	263	190	H
			* 2.39	53.45	RMS	32.1	0	-34.83	50.72	54	-3.28	-	-	263	190	H
			* 2.39	63.96	Pk	32.1	0	-34.83	61.23	-	-	74	-12.77	320	400	V
			* 2.389956	65.84	Pk	32.1	0	-34.83	63.11	-	-	74	-10.89	320	400	V
			* 2.39	51.14	RMS	32.1	0	-34.83	48.41	54	-5.59	-	-	320	400	V
			* 2.39	51.16	RMS	32.1	0	-34.83	48.43	54	-5.57	-	-	320	400	V
EHT20 (SU Mode)	2412	4+3	* 2.39	72.64	Pk	32.3	0	-37.67	67.27	-	-	74	-6.73	345	239	H
			* 2.389519	73.65	Pk	32.3	0	-37.67	68.28	-	-	74	-5.72	345	239	H
			* 2.39	54.49	RMS	32.3	0	-37.67	49.12	54	-4.88	-	-	345	239	H
			* 2.39	54.5	RMS	32.3	0	-37.67	49.13	54	-4.87	-	-	345	239	H
			* 2.39	70.79	Pk	32.3	0	-37.67	65.42	-	-	74	-8.58	48	228	V
			* 2.388151	74.79	Pk	32.3	0	-37.67	69.42	-	-	74	-4.58	48	228	V
			* 2.39	54.41	RMS	32.3	0	-37.67	49.04	54	-4.96	-	-	48	228	V
			* 2.389898	55.56	RMS	32.3	0	-37.67	50.19	54	-3.81	-	-	48	228	V
EHT20 (RU 26 / Index 0)	2412	4+3	* 2.39	66.61	Pk	32.3	0	-37.67	61.24	-	-	74	-12.76	240	182	H
			* 2.388239	68.98	Pk	32.3	0	-37.67	63.61	-	-	74	-10.39	240	182	H
			* 2.39	50.12	RMS	32.3	0	-37.67	44.75	54	-9.25	-	-	240	182	H
			* 2.388035	51.54	RMS	32.3	0	-37.67	46.17	54	-7.83	-	-	240	182	H
			* 2.39	70.81	Pk	32.3	0	-37.67	65.44	-	-	74	-8.56	52	202	V
			* 2.389985	71.11	Pk	32.3	0	-37.67	65.74	-	-	74	-8.26	52	202	V
			* 2.39	51.45	RMS	32.3	0	-37.67	46.08	54	-7.92	-	-	52	202	V
			* 2.389956	53.42	RMS	32.3	0	-37.67	48.05	54	-5.95	-	-	52	202	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

9.1.3. 802.11b/n/be SISO MODE – LOW BANDEDGE – CHANNEL 2

State A

DTS (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
b-Mode	2417	4	* 2.39	60.71	Pk	32.1	0	-40.3	52.51	-	-	74	-21.49	163	129	H
			* 2.387351	62.8	Pk	32.1	0	-40.17	54.73	-	-	74	-19.27	163	129	H
			* 2.39	49.89	RMS	32.1	0	-40.3	41.69	54	-12.31	-	-	163	129	H
			* 2.350247	50.85	RMS	32	0	-39.9	42.95	54	-11.05	-	-	163	129	H
			* 2.39	61.35	Pk	32.1	0	-40.3	53.15	-	-	74	-20.85	106	352	V
			* 2.376827	63.43	Pk	32.1	0	-40.38	55.15	-	-	74	-18.85	106	352	V
		3	* 2.39	49.75	RMS	32.1	0	-40.3	41.55	54	-12.45	-	-	106	352	V
			* 2.34968	50.86	RMS	32	0	-39.9	42.96	54	-11.04	-	-	106	352	V
			* 2.39	59.57	Pk	32.2	0	-34.31	57.46	-	-	74	-16.54	91	205	H
			* 2.323057	62.11	Pk	31.9	0	-34.45	59.56	-	-	74	-14.44	91	205	H
			* 2.39	48.21	RMS	32.2	0	-34.31	46.1	54	-7.9	-	-	91	205	H
			* 2.383289	49.64	RMS	32.2	0	-34.33	47.51	54	-6.49	-	-	91	205	H
			* 2.39	59.4	Pk	32.2	0	-34.31	57.29	-	-	74	-16.71	31	135	V
			* 2.367729	62.02	Pk	32.1	0	-34.4	59.72	-	-	74	-14.28	31	135	V
			* 2.39	48.6	RMS	32.2	0	-34.31	46.49	54	-7.51	-	-	31	135	V
			* 2.388995	49.72	RMS	32.2	0	-34.32	47.6	54	-6.4	-	-	31	135	V
HT20	2417	4	* 2.39	69.21	Pk	32.2	0	-38.9	62.51	-	-	74	-11.49	81	122	H
			* 2.39	69.22	Pk	32.2	0	-38.9	62.52	-	-	74	-11.48	81	122	H
			* 2.39	54.02	RMS	32.2	0	-38.9	47.32	54	-6.68	-	-	81	122	H
			* 2.389942	54.74	RMS	32.2	0	-38.9	48.04	54	-5.96	-	-	81	122	H
			* 2.39	70.63	Pk	32.2	0	-38.9	63.93	-	-	74	-10.07	175	119	V
			* 2.389956	71.68	Pk	32.2	0	-38.9	64.98	-	-	74	-9.02	175	119	V
			* 2.39	54.51	RMS	32.2	0	-38.9	47.81	54	-6.19	-	-	175	119	V
			* 2.38968	55.44	RMS	32.2	0	-38.9	48.74	54	-5.26	-	-	175	119	V
		3	* 2.39	71.45	Pk	32.2	0	-38.9	64.75	-	-	74	-9.25	114	144	H
			* 2.389971	73.86	Pk	32.2	0	-38.9	67.16	-	-	74	-6.84	114	144	H
			* 2.39	56.08	RMS	32.2	0	-38.9	49.38	54	-4.62	-	-	114	144	H
			* 2.389854	57.2	RMS	32.2	0	-38.9	50.5	54	-3.5	-	-	114	144	H
			* 2.39	70.07	Pk	32.2	0	-38.9	63.37	-	-	74	-10.63	43	295	V
			* 2.389854	72.29	Pk	32.2	0	-38.9	65.59	-	-	74	-8.41	43	295	V
			* 2.39	55.7	RMS	32.2	0	-38.9	49	54	-5	-	-	43	295	V
			* 2.389956	56.48	RMS	32.2	0	-38.9	49.78	54	-4.22	-	-	43	295	V
EHT20 (SU Mode)	2417	4	* 2.39	66.15	Pk	32.1	0	-34.83	63.42	-	-	74	-10.58	153	160	H
			* 2.389825	67.04	Pk	32.1	0	-34.83	64.31	-	-	74	-9.69	153	160	H
			* 2.39	51.89	RMS	32.1	0	-34.83	49.16	54	-4.84	-	-	153	160	H
			* 2.389912	52.25	RMS	32.1	0	-34.83	49.52	54	-4.48	-	-	153	160	H
			* 2.39	67.75	Pk	32.1	0	-34.83	65.02	-	-	74	-8.98	233	101	V
			* 2.389665	68.2	Pk	32.1	0	-34.83	65.47	-	-	74	-8.53	233	101	V
			* 2.39	53.02	RMS	32.1	0	-34.83	50.29	54	-3.71	-	-	233	101	V
			* 2.389956	53.44	RMS	32.1	0	-34.83	50.71	54	-3.29	-	-	233	101	V
		3	* 2.39	65.77	Pk	32.1	0	-34.83	63.04	-	-	74	-10.96	175	144	H
			* 2.389927	68.36	Pk	32.1	0	-34.83	65.63	-	-	74	-8.37	175	144	H
			* 2.39	52.55	RMS	32.1	0	-34.83	49.82	54	-4.18	-	-	175	144	H
			* 2.38965	53.53	RMS	32.1	0	-34.83	50.8	54	-3.2	-	-	175	144	H
			* 2.39	64.51	Pk	32.1	0	-34.83	61.78	-	-	74	-12.22	97	292	V
			* 2.389592	67.58	Pk	32.1	0	-34.83	64.85	-	-	74	-9.15	97	292	V
			* 2.39	52.02	RMS	32.1	0	-34.83	49.29	54	-4.71	-	-	97	292	V
			* 2.389956	52.55	RMS	32.1	0	-34.83	49.82	54	-4.18	-	-	97	292	V
EHT20 (RU 26 / Index 0)	2417	4	* 2.39	61.44	Pk	32.3	0	-40.4	53.34	-	-	74	-20.66	204	377	H
			* 2.385968	63.8	Pk	32.3	0	-40.4	55.7	-	-	74	-18.3	204	377	H
			* 2.39	50.15	RMS	32.3	0	-40.4	42.05	54	-11.95	-	-	204	377	H
			* 2.337118	51.61	RMS	32.1	0	-40.39	43.32	54	-10.68	-	-	204	377	H
			* 2.39	62.25	Pk	32.3	0	-40.4	54.15	-	-	74	-19.85	78	304	V
			* 2.389403	64.91	Pk	32.3	0	-40.4	56.81	-	-	74	-17.19	78	304	V
			* 2.39	50.17	RMS	32.3	0	-40.4	42.07	54	-11.93	-	-	78	304	V
			* 2.336914	51.73	RMS	32.1	0	-40.4	43.43	54	-10.57	-	-	78	304	V
		3	* 2.39	62.97	Pk	32.1	0	-34.83	60.24	-	-	74	-13.76	173	160	H
			* 2.389636	64.16	Pk	32.1	0	-34.83	61.43	-	-	74	-12.57	173	160	H
			* 2.39	48.65	RMS	32.1	0	-34.83	45.92	54	-8.08	-	-	173	160	H
			* 2.385618	49.58	RMS	32	0	-34.81	46.77	54	-7.23	-	-	173	160	H
			* 2.39	60.41	Pk	32.1	0	-34.83	57.68	-	-	74	-16.32	118	232	V
			* 2.389126	61.99	Pk	32.1	0	-34.84	59.25	-	-	74	-14.75	118	232	V
			* 2.39	48.46	RMS	32.1	0	-34.83	45.73	54	-8.27	-	-	118	232	V
			* 2.387467	49.67	RMS	32	0	-34.83	46.84	54	-7.16	-	-	118	232	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

State B

DTS (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
b-Mode	2417	4	* 2.39	53.37	Pk	32.3	0	-34.8	50.87	-	-	74	-23.13	346	211	H
			* 2.389772	56.69	Pk	32.3	0	-34.8	54.19	-	-	74	-19.81	346	211	H
			* 2.39	43.01	RMS	32.3	0	-34.8	40.51	54	-13.49	-	-	346	211	H
			* 2.384581	44.36	RMS	32.2	0	-34.8	41.76	54	-12.24	-	-	346	211	H
			* 2.39	53.8	Pk	32.3	0	-34.8	51.3	-	-	74	-22.7	222	345	V
			* 2.378931	56.67	Pk	32.2	0	-34.9	53.97	-	-	74	-20.03	222	345	V
		3	* 2.39	43.03	RMS	32.3	0	-34.8	40.53	54	-13.47	-	-	222	345	V
			* 2.389543	44.2	RMS	32.3	0	-34.8	41.7	54	-12.3	-	-	222	345	V
			* 2.39	53.78	Pk	32.3	0	-34.8	51.28	-	-	74	-22.72	169	189	H
			* 2.383516	56.19	Pk	32.2	0	-34.8	53.59	-	-	74	-20.41	169	189	H
			* 2.39	43.18	RMS	32.3	0	-34.8	40.68	54	-13.32	-	-	169	189	H
			* 2.389248	44.21	RMS	32.3	0	-34.8	41.71	54	-12.29	-	-	169	189	H
			* 2.39	53.86	Pk	32.3	0	-34.8	51.36	-	-	74	-22.64	157	371	V
			* 2.327687	56.82	Pk	32	0	-35	53.82	-	-	74	-20.18	157	371	V
			* 2.39	43.46	RMS	32.3	0	-34.8	40.96	54	-13.04	-	-	157	371	V
			* 2.389838	44.58	RMS	32.3	0	-34.8	42.08	54	-11.92	-	-	157	371	V
HT20	2417	4	* 2.39	60.97	Pk	32.2	0	-38.9	54.27	-	-	74	-19.73	323	171	H
			* 2.374818	62.53	Pk	32.1	0	-39	55.63	-	-	74	-18.37	323	171	H
			* 2.39	49.58	RMS	32.2	0	-38.9	42.88	54	-11.12	-	-	323	171	H
			* 2.38722	50.26	RMS	32.2	0	-38.9	43.56	54	-10.44	-	-	323	171	H
			* 2.39	59.79	Pk	32.2	0	-38.9	53.09	-	-	74	-20.91	88	391	V
			* 2.340801	62.93	Pk	32	0	-39	55.93	-	-	74	-18.07	88	391	V
		3	* 2.39	49.37	RMS	32.2	0	-38.9	42.67	54	-11.33	-	-	88	391	V
			* 2.385284	50.24	RMS	32.2	0	-38.9	43.54	54	-10.46	-	-	88	391	V
			* 2.39	53.73	Pk	32.3	0	-34.8	51.23	-	-	74	-22.77	238	302	H
			* 2.38517	56.34	Pk	32.2	0	-34.8	53.74	-	-	74	-20.26	238	302	H
			* 2.39	43.27	RMS	32.3	0	-34.8	40.77	54	-13.23	-	-	238	302	H
			* 2.388118	44.35	RMS	32.3	0	-34.8	41.85	54	-12.15	-	-	238	302	H
			* 2.39	54.91	Pk	32.3	0	-34.8	52.41	-	-	74	-21.59	340	385	V
			* 2.358607	56.91	Pk	32	0	-35	53.91	-	-	74	-20.09	340	385	V
			* 2.39	43.58	RMS	32.3	0	-34.8	41.08	54	-12.92	-	-	340	385	V
			* 2.387971	44.61	RMS	32.3	0	-34.8	42.11	54	-11.89	-	-	340	385	V
EHT20 (SU Mode)	2417	4	* 2.39	66.9	Pk	32.1	0	-34.83	64.17	-	-	74	-9.83	253	114	H
			* 2.389447	70.65	Pk	32.1	0	-34.84	67.91	-	-	74	-6.09	253	114	H
			* 2.39	53.27	RMS	32.1	0	-34.83	50.54	54	-3.46	-	-	253	114	H
			* 2.389971	53.49	RMS	32.1	0	-34.83	50.76	54	-3.24	-	-	253	114	H
			* 2.39	59.67	Pk	32.1	0	-34.83	56.94	-	-	74	-17.06	284	375	V
			* 2.389912	61.69	Pk	32.1	0	-34.83	58.96	-	-	74	-15.04	284	375	V
		3	* 2.39	49.07	RMS	32.1	0	-34.83	46.34	54	-7.66	-	-	284	375	V
			* 2.389403	49.93	RMS	32.1	0	-34.84	47.19	54	-6.81	-	-	284	375	V
			* 2.39	69.89	Pk	32.2	0	-38.9	63.19	-	-	74	-10.81	155	142	H
			* 2.389418	70.88	Pk	32.2	0	-39	64.08	-	-	74	-9.92	155	142	H
			* 2.39	54.53	RMS	32.2	0	-38.9	47.83	54	-6.17	-	-	155	142	H
			* 2.389971	55.86	RMS	32.2	0	-38.9	49.16	54	-4.84	-	-	155	142	H
			* 2.39	64.56	Pk	32.2	0	-38.9	57.86	-	-	74	-16.14	195	392	V
			* 2.389709	65.83	Pk	32.2	0	-38.9	59.13	-	-	74	-14.87	195	392	V
			* 2.39	52	RMS	32.2	0	-38.9	45.3	54	-8.7	-	-	195	392	V
			* 2.389912	52.52	RMS	32.2	0	-38.9	45.82	54	-8.18	-	-	195	392	V
EHT20 (RU 26 / Index 0)	2417	4	* 2.39	69.4	Pk	32.3	0	-40.4	61.3	-	-	74	-12.7	11	210	H
			* 2.39	69.41	Pk	32.3	0	-40.4	61.31	-	-	74	-12.69	11	210	H
			* 2.39	50.74	RMS	32.3	0	-40.4	42.64	54	-11.36	-	-	11	210	H
			* 2.389214	51.89	RMS	32.3	0	-40.4	43.79	54	-10.21	-	-	11	210	H
			* 2.39	67.55	Pk	32.3	0	-40.4	59.45	-	-	74	-14.55	53	256	V
			* 2.389985	69.71	Pk	32.3	0	-40.4	61.61	-	-	74	-12.39	53	256	V
		3	* 2.39	50.52	RMS	32.3	0	-40.4	42.42	54	-11.58	-	-	53	256	V
			* 2.389476	51.68	RMS	32.3	0	-40.4	43.58	54	-10.42	-	-	53	256	V
			* 2.39	64.65	Pk	32.2	0	-38.9	57.95	-	-	74	-16.05	173	206	H
			* 2.389519	67	Pk	32.2	0	-38.9	60.3	-	-	74	-13.7	173	206	H
			* 2.39	49.84	RMS	32.2	0	-38.9	43.14	54	-10.86	-	-	173	206	H
			* 2.389694	50.33	RMS	32.2	0	-38.9	43.63	54	-10.37	-	-	173	206	H
			* 2.39	61.09	Pk	32.2	0	-38.9	54.39	-	-	74	-19.61	238	390	V
			* 2.389185	63.64	Pk	32.2	0	-39	56.84	-	-	74	-17.16	238	390	V
			* 2.39	48.58	RMS	32.2	0	-38.9	41.88	54	-12.12	-	-	238	390	V
			* 2.388297	50.3	RMS	32.2	0	-38.9	43.6	54	-10.4	-	-	238	390	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

9.1.4. 802.11b/n/be MIMO CDD MODE – LOW BANDEDGE – CHANNEL 2

State A

DTS (MIMO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
b-Mode	2417	4+3	*2.39	58.9	Pk	32.2	0	-34.31	56.79	-	-	74	-17.21	71	124	H
			*2.389039	61.5	Pk	32.2	0	-34.32	59.38	-	-	74	-14.62	71	124	H
			*2.39	48.35	RMS	32.2	0	-34.31	46.24	54	-7.76	-	-	71	124	H
			*2.371601	49.65	RMS	32.1	0	-34.38	47.37	54	-6.63	-	-	71	124	H
			*2.39	59.73	Pk	32.2	0	-34.31	57.62	-	-	74	-16.38	170	401	V
			*2.388224	61.64	Pk	32.2	0	-34.31	59.53	-	-	74	-14.47	170	401	V
			*2.39	48.48	RMS	32.2	0	-34.31	46.37	54	-7.63	-	-	170	401	V
HT20	2417	4+3	*2.387321	49.79	RMS	32.2	0	-34.32	47.67	54	-6.33	-	-	170	401	V
			*2.39	74.02	Pk	32.1	0	-39.53	66.59	-	-	74	-7.41	27	137	H
			*2.389359	75.75	Pk	32.1	0	-39.53	68.32	-	-	74	-5.68	27	137	H
			*2.39	57.68	RMS	32.1	0	-39.53	50.25	54	-3.75	-	-	27	137	H
			*2.389883	58.72	RMS	32.1	0	-39.53	51.29	54	-2.71	-	-	27	137	H
			*2.39	64.35	Pk	32.1	0	-39.53	56.92	-	-	74	-17.08	58	122	V
			*2.389767	65.28	Pk	32.1	0	-39.53	57.85	-	-	74	-16.15	58	122	V
EHT20 (SU Mode)	2417	4+3	*2.39	51.36	RMS	32.1	0	-39.53	43.93	54	-10.07	-	-	58	122	V
			*2.389621	52.3	RMS	32.1	0	-39.53	44.87	54	-9.13	-	-	58	122	V
			*2.39	48.49	Pk	31.8	0	-19.4	60.89	-	-	74	-13.11	153	138	H
			*2.388986	54.96	Pk	31.8	0	-19.4	67.36	-	-	74	-6.64	153	138	H
			*2.39	34.64	RMS	31.8	0	-19.4	47.04	54	-6.96	-	-	153	138	H
			*2.389019	37.85	RMS	31.8	0	-19.4	50.25	54	-3.75	-	-	153	138	H
			*2.39	44.07	Pk	31.8	0	-19.4	56.47	-	-	74	-17.53	197	150	V
EHT20 (RU 26/ Index 0)	2417	4+3	*2.389297	47.42	Pk	31.8	0	-19.4	59.82	-	-	74	-14.18	197	150	V
			*2.39	33.14	RMS	31.8	0	-19.4	45.54	54	-8.46	-	-	197	150	V
			*2.389543	33.71	RMS	31.8	0	-19.4	46.11	54	-7.89	-	-	197	150	V
			*2.39	67.13	Pk	32.2	0	-37.08	62.25	-	-	74	-11.75	245	122	H
			*2.389956	68.93	Pk	32.2	0	-37.08	64.05	-	-	74	-9.95	245	122	H
			*2.39	50.13	RMS	32.2	0	-37.08	45.25	54	-8.75	-	-	245	122	H
			*2.389854	51.15	RMS	32.2	0	-37.08	46.27	54	-7.73	-	-	245	122	H
			*2.39	61.62	Pk	32.2	0	-37.08	56.74	-	-	74	-17.26	37	104	V
			*2.389927	63.02	Pk	32.2	0	-37.08	58.14	-	-	74	-15.86	37	104	V
			*2.39	48.31	RMS	32.2	0	-37.08	43.43	54	-10.57	-	-	37	104	V
			*2.38949	50.09	RMS	32.2	0	-37.08	45.21	54	-8.79	-	-	37	104	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

State B

DTS (MIMO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
b-Mode	2417	4+3	* 2.39	60.49	Pk	32	0	-34.04	58.45	-	-	74	-15.55	34	139	H
			* 2.3731	62.13	Pk	31.9	0	-34.1	59.93	-	-	74	-14.07	34	139	H
			* 2.39	48.97	RMS	32	0	-34.04	46.93	54	-7.07	-	-	34	139	H
			* 2.378282	49.9	RMS	32	0	-34.1	47.8	54	-6.2	-	-	34	139	H
			* 2.39	59.03	Pk	32	0	-34.04	56.99	-	-	74	-17.01	292	352	V
			* 2.310859	62.6	Pk	31.7	0	-34.32	59.98	-	-	74	-14.02	292	352	V
			* 2.39	48.95	RMS	32	0	-34.04	46.91	54	-7.09	-	-	292	352	V
			* 2.323348	50.21	RMS	31.7	0	-34.29	47.62	54	-6.38	-	-	292	352	V
HT20	2417	4+3	* 2.39	66.85	Pk	32.1	0	-34.83	64.12	-	-	74	-9.88	247	114	H
			* 2.389985	69.91	Pk	32.1	0	-34.83	67.18	-	-	74	-6.82	247	114	H
			* 2.39	52.33	RMS	32.1	0	-34.83	49.6	54	-4.4	-	-	247	114	H
			* 2.389723	53.51	RMS	32.1	0	-34.83	50.78	54	-3.22	-	-	247	114	H
			* 2.39	59.93	Pk	32.1	0	-34.83	57.2	-	-	74	-16.8	162	365	V
			* 2.389621	61.84	Pk	32.1	0	-34.83	59.11	-	-	74	-14.89	162	365	V
			* 2.39	49.29	RMS	32.1	0	-34.83	46.56	54	-7.44	-	-	162	365	V
			* 2.389126	49.63	RMS	32.1	0	-34.84	46.89	54	-7.11	-	-	162	365	V
EHT20 (SU Mode)	2417	4+3	* 2.39	66.38	Pk	32.3	0	-37.67	61.01	-	-	74	-12.99	233	164	H
			* 2.387991	71.84	Pk	32.3	0	-37.67	66.47	-	-	74	-7.53	233	164	H
			* 2.39	53.32	RMS	32.3	0	-37.67	47.95	54	-6.05	-	-	233	164	H
			* 2.388442	56.37	RMS	32.3	0	-37.67	51	54	-3	-	-	233	164	H
			* 2.39	66.44	Pk	32.3	0	-37.67	61.07	-	-	74	-12.93	73	109	V
			* 2.389985	68.61	Pk	32.3	0	-37.67	63.24	-	-	74	-10.76	73	109	V
			* 2.39	53.92	RMS	32.3	0	-37.67	48.55	54	-5.45	-	-	73	109	V
			* 2.389971	54.18	RMS	32.3	0	-37.67	48.81	54	-5.19	-	-	73	109	V
EHT20 (RU 26/ Index 0)	2417	4+3	* 2.39	65.69	Pk	32.2	0	-37.08	60.81	-	-	74	-13.19	169	180	H
			* 2.389985	67.43	Pk	32.2	0	-37.08	62.55	-	-	74	-11.45	169	180	H
			* 2.39	49.94	RMS	32.2	0	-37.08	45.06	54	-8.94	-	-	169	180	H
			* 2.389738	50.25	RMS	32.2	0	-37.08	45.37	54	-8.63	-	-	169	180	H
			* 2.39	61.99	Pk	32.2	0	-37.08	57.11	-	-	74	-16.89	233	379	V
			* 2.352562	62.5	Pk	32	0	-37.1	57.4	-	-	74	-16.6	233	379	V
			* 2.39	49.25	RMS	32.2	0	-37.08	44.37	54	-9.63	-	-	233	379	V
			* 2.383682	50.41	RMS	32.2	0	-37.14	45.47	54	-8.53	-	-	233	379	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

9.1.5. 802.11be SISO CDD MODE – LOW BANDEDGE – CHANNEL 3**State A**

DTS (MIMO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (SU Mode)	2422	4	* 2.39	64.62	Pk	32.1	0	-34.83	61.89	-	-	74	-12.11	150	130	H
			* 2.388602	66.01	Pk	32.1	0	-34.84	63.27	-	-	74	-10.73	150	130	H
			* 2.39	51.08	RMS	32.1	0	-34.83	48.35	54	-5.65	-	-	150	130	H
			* 2.389811	51.84	RMS	32.1	0	-34.83	49.11	54	-4.89	-	-	150	130	H
			* 2.39	63.36	Pk	32.1	0	-34.83	60.63	-	-	74	-13.37	236	173	V
			* 2.388704	64.31	Pk	32.1	0	-34.84	61.57	-	-	74	-12.43	236	173	V
		3	* 2.39	51.07	RMS	32.1	0	-34.83	48.34	54	-5.66	-	-	236	173	V
			* 2.389898	51.22	RMS	32.1	0	-34.83	48.49	54	-5.51	-	-	236	173	V
			* 2.39	66.45	Pk	32.1	0	-34.83	63.72	-	-	74	-10.28	167	206	H
			* 2.389971	67.08	Pk	32.1	0	-34.83	64.35	-	-	74	-9.65	167	206	H
			* 2.39	51.61	RMS	32.1	0	-34.83	48.88	54	-5.12	-	-	167	206	H
			* 2.389825	52.25	RMS	32.1	0	-34.83	49.52	54	-4.48	-	-	167	206	H
			* 2.39	62.96	Pk	32.1	0	-34.83	60.23	-	-	74	-13.77	77	302	V
			* 2.389738	65.95	Pk	32.1	0	-34.83	63.22	-	-	74	-10.78	77	302	V
			* 2.39	51.18	RMS	32.1	0	-34.83	48.45	54	-5.55	-	-	77	302	V
			* 2.389854	51.37	RMS	32.1	0	-34.83	48.64	54	-5.36	-	-	77	302	V
EHT20 (RU 26/ Index 0)	2422	4	* 2.39	61.72	Pk	32.3	0	-40.4	53.62	-	-	74	-20.38	298	252	H
			* 2.389898	65.3	Pk	32.3	0	-40.4	57.2	-	-	74	-16.8	298	252	H
			* 2.39	50.32	RMS	32.3	0	-40.4	42.22	54	-11.78	-	-	298	252	H
			* 2.325895	51.53	RMS	32.1	0	-40.3	43.33	54	-10.67	-	-	298	252	H
			* 2.39	64.41	Pk	32.3	0	-40.4	56.31	-	-	74	-17.69	44	144	V
			* 2.389898	64.88	Pk	32.3	0	-40.4	56.78	-	-	74	-17.22	44	144	V
		3	* 2.39	50.5	RMS	32.3	0	-40.4	42.4	54	-11.6	-	-	44	144	V
			* 2.354381	51.43	RMS	32.2	0	-40.4	43.23	54	-10.77	-	-	44	144	V
			* 2.39	61.49	Pk	32.1	0	-34.83	58.76	-	-	74	-15.24	173	187	H
			* 2.389665	63.34	Pk	32.1	0	-34.83	60.61	-	-	74	-13.39	173	187	H
			* 2.39	49.47	RMS	32.1	0	-34.83	46.74	54	-7.26	-	-	173	187	H
			* 2.389068	49.84	RMS	32.1	0	-34.84	47.1	54	-6.9	-	-	173	187	H
			* 2.39	61.02	Pk	32.1	0	-34.83	58.29	-	-	74	-15.71	125	252	V
			* 2.385808	61.92	Pk	32	0	-34.81	59.11	-	-	74	-14.89	125	252	V
			* 2.39	48.17	RMS	32.1	0	-34.83	45.44	54	-8.56	-	-	125	252	V
			* 2.389505	49.78	RMS	32.1	0	-34.83	47.05	54	-6.95	-	-	125	252	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

State B

DTS (MIMO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (SU Mode)	2422	4	* 2.39	65.37	Pk	32.1	0	-34.83	62.64	-	-	74	-11.36	243	142	H
			* 2.389185	65.76	Pk	32.1	0	-34.84	63.02	-	-	74	-10.98	243	142	H
			* 2.39	51.54	RMS	32.1	0	-34.83	48.81	54	-5.19	-	-	243	142	H
			* 2.389752	52.58	RMS	32.1	0	-34.83	49.85	54	-4.15	-	-	243	142	H
			* 2.39	59.8	Pk	32.1	0	-34.83	57.07	-	-	74	-16.93	279	366	V
			* 2.384425	62.38	Pk	32	0	-34.81	59.57	-	-	74	-14.43	279	366	V
		3	* 2.39	48.73	RMS	32.1	0	-34.83	46	54	-8	-	-	279	366	V
			* 2.389694	49.62	RMS	32.1	0	-34.83	46.89	54	-7.11	-	-	279	366	V
			* 2.39	68.27	Pk	32.2	0	-38.9	61.57	-	-	74	-12.43	142	147	H
			* 2.39	68.28	Pk	32.2	0	-38.9	61.58	-	-	74	-12.42	142	147	H
			* 2.39	54.49	RMS	32.2	0	-38.9	47.79	54	-6.21	-	-	142	147	H
			* 2.39	54.51	RMS	32.2	0	-38.9	47.81	54	-6.19	-	-	142	147	H
			* 2.39	65.1	Pk	32.2	0	-38.9	58.4	-	-	74	-15.6	354	394	V
			* 2.389694	65.87	Pk	32.2	0	-38.9	59.17	-	-	74	-14.83	354	394	V
			* 2.39	51.98	RMS	32.2	0	-38.9	45.28	54	-8.72	-	-	354	394	V
			* 2.389883	51.99	RMS	32.2	0	-38.9	45.29	54	-8.71	-	-	354	394	V
EHT20 (RU 26/ Index 0)	2422	4	* 2.39	61.6	Pk	32.3	0	-38.55	55.35	-	-	74	-18.65	85	116	H
			* 2.389956	64.98	Pk	32.3	0	-38.55	58.73	-	-	74	-15.27	85	116	H
			* 2.39	49.9	RMS	32.3	0	-38.55	43.65	54	-10.35	-	-	85	116	H
			* 2.389359	50.57	RMS	32.3	0	-38.56	44.31	54	-9.69	-	-	85	116	H
			* 2.39	61.03	Pk	32.3	0	-38.55	54.78	-	-	74	-19.22	166	364	V
			* 2.376084	63.13	Pk	32.2	0	-38.62	56.71	-	-	74	-17.29	166	364	V
		3	* 2.39	49.94	RMS	32.3	0	-38.55	43.69	54	-10.31	-	-	166	364	V
			* 2.383158	50.81	RMS	32.2	0	-38.57	44.44	54	-9.56	-	-	166	364	V
			* 2.39	61.96	Pk	32.2	0	-38.9	55.26	-	-	74	-18.74	84	159	H
			* 2.389985	63.75	Pk	32.2	0	-38.9	57.05	-	-	74	-16.95	84	159	H
			* 2.39	49.12	RMS	32.2	0	-38.9	42.42	54	-11.58	-	-	84	159	H
			* 2.380116	50.41	RMS	32.1	0	-38.9	43.61	54	-10.39	-	-	84	159	H
			* 2.39	59.93	Pk	32.2	0	-38.9	53.23	-	-	74	-20.77	242	392	V
			* 2.372009	63.48	Pk	32.1	0	-39	56.58	-	-	74	-17.42	242	392	V
			* 2.39	49.6	RMS	32.2	0	-38.9	42.9	54	-11.1	-	-	242	392	V
			* 2.370975	50.54	RMS	32.1	0	-38.9	43.74	54	-10.26	-	-	242	392	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

9.1.6. 802.11be MIMO CDD MODE – LOW BANDEDGE – CHANNEL 3**State A**

DTS (MIMO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (SU Mode)	2422	4+3	* 2.39	70.93	Pk	32.3	0	-40.4	62.83	-	-	74	-11.17	63	145	H
			* 2.389781	74.13	Pk	32.3	0	-40.4	66.03	-	-	74	-7.97	63	145	H
			* 2.39	58.66	RMS	32.3	0	-40.4	50.56	54	-3.44	-	-	63	145	H
			* 2.39	58.66	RMS	32.3	0	-40.4	50.56	54	-3.44	-	-	63	145	H
			* 2.39	70.15	Pk	32.3	0	-40.4	62.05	-	-	74	-11.95	225	342	V
			* 2.389912	75.61	Pk	32.3	0	-40.4	67.51	-	-	74	-6.49	225	342	V
			* 2.39	57.26	RMS	32.3	0	-40.4	49.16	54	-4.84	-	-	225	342	V
			* 2.389898	58.23	RMS	32.3	0	-40.4	50.13	54	-3.87	-	-	225	342	V
EHT20 (RU 26/ Index 0)	2422	4+3	* 2.39	66.78	Pk	32.2	0	-37.08	61.9	-	-	74	-12.1	236	134	H
			* 2.389971	68.37	Pk	32.2	0	-37.08	63.49	-	-	74	-10.51	236	134	H
			* 2.39	49.49	RMS	32.2	0	-37.08	44.61	54	-9.39	-	-	236	134	H
			* 2.389228	50.47	RMS	32.2	0	-37.08	45.59	54	-8.41	-	-	236	134	H
			* 2.39	60.38	Pk	32.2	0	-37.08	55.5	-	-	74	-18.5	32	134	V
			* 2.369199	62.37	Pk	32.1	0	-37.1	57.37	-	-	74	-16.63	32	134	V
			* 2.39	49.53	RMS	32.2	0	-37.08	44.65	54	-9.35	-	-	32	134	V
			* 2.375225	50.05	RMS	32.2	0	-37.09	45.16	54	-8.84	-	-	32	134	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection


State B

DTS (MIMO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (SU Mode)	2422	4+3	*2.39	71.14	Pk	32.3	0	-37.67	65.77	-	-	74	-8.23	261	148	H
			*2.38984	71.56	Pk	32.3	0	-37.67	66.19	-	-	74	-7.81	261	148	H
			*2.39	55.74	RMS	32.3	0	-37.67	50.37	54	-3.63	-	-	261	148	H
			*2.389883	56.76	RMS	32.3	0	-37.67	51.39	54	-2.61	-	-	261	148	H
			*2.39	60.6	Pk	32.3	0	-37.67	55.23	-	-	74	-18.77	107	102	V
			*2.387875	63.31	Pk	32.3	0	-37.67	57.94	-	-	74	-16.06	107	102	V
			*2.39	50.01	RMS	32.3	0	-37.67	44.64	54	-9.36	-	-	107	102	V
EHT20 (RU 26/ Index 0)	2422	4+3	*2.387976	50.87	RMS	32.3	0	-37.67	45.5	54	-8.5	-	-	107	102	V
			*2.39	61.21	Pk	32.2	0	-37.08	56.33	-	-	74	-17.67	274	103	H
			*2.389956	63.61	Pk	32.2	0	-37.08	58.73	-	-	74	-15.27	274	103	H
			*2.39	49.6	RMS	32.2	0	-37.08	44.72	54	-9.28	-	-	274	103	H
			*2.371193	50.4	RMS	32.1	0	-37.08	45.42	54	-8.58	-	-	274	103	H
			*2.39	59.65	Pk	32.2	0	-37.08	54.77	-	-	74	-19.23	31	361	V
			*2.333741	62.55	Pk	31.9	0	-37.02	57.43	-	-	74	-16.57	31	361	V
			*2.39	49.22	RMS	32.2	0	-37.08	44.34	54	-9.66	-	-	31	361	V
			*2.372896	50.16	RMS	32.1	0	-37.09	45.17	54	-8.83	-	-	31	361	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

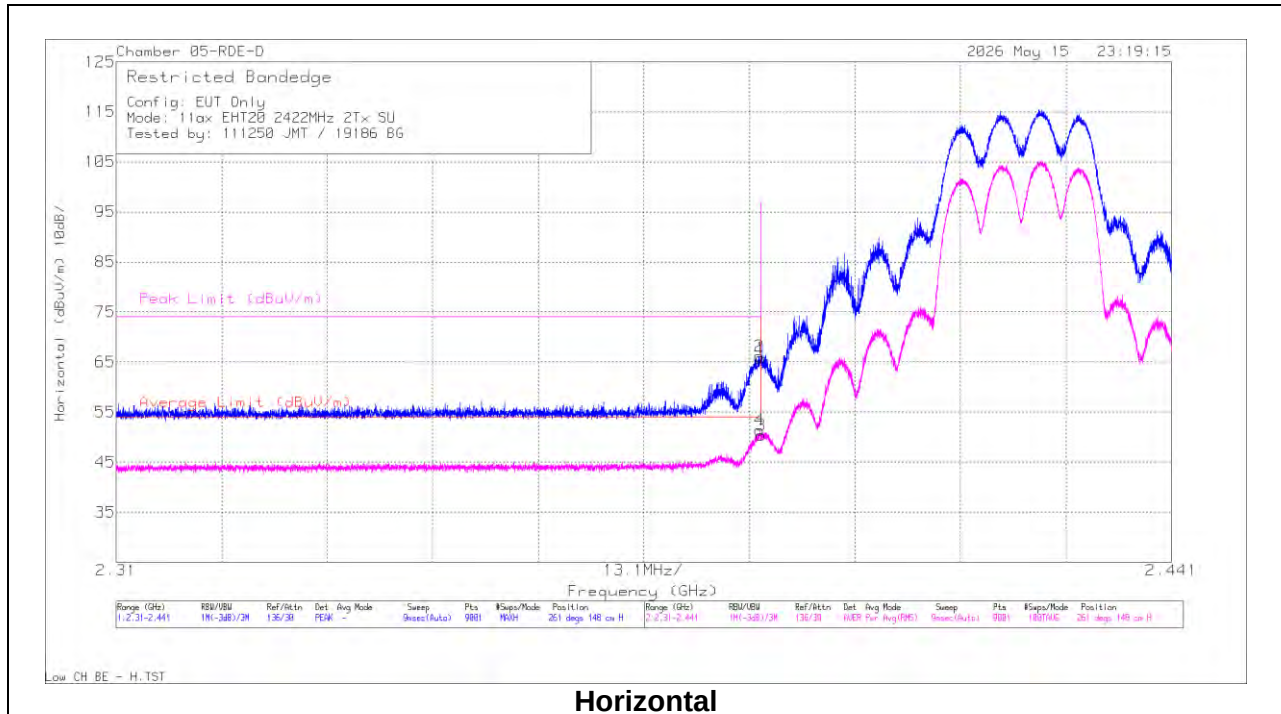
WORST-CASE LOW BANDEDGE**11be EHT20 / MIMO ANT 4+3 / CHANNEL 3 / 2422 MHz /State B:****HORIZONTAL RESULT****Horizontal****Trace Markers**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	81887 ACF (dBm)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*2.39	71.14	Pk	32.3	0	-37.67	65.77	-	-	74	-8.23	261	148	H
2	*2.38984	71.56	Pk	32.3	0	-37.67	66.19	-	-	74	-7.81	261	148	H
3	*2.39	55.74	RMS	32.3	0	-37.67	50.37	54	-3.63	-	-	261	148	H
4	*2.389883	56.76	RMS	32.3	0	-37.67	51.39	54	-2.61	-	-	261	148	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

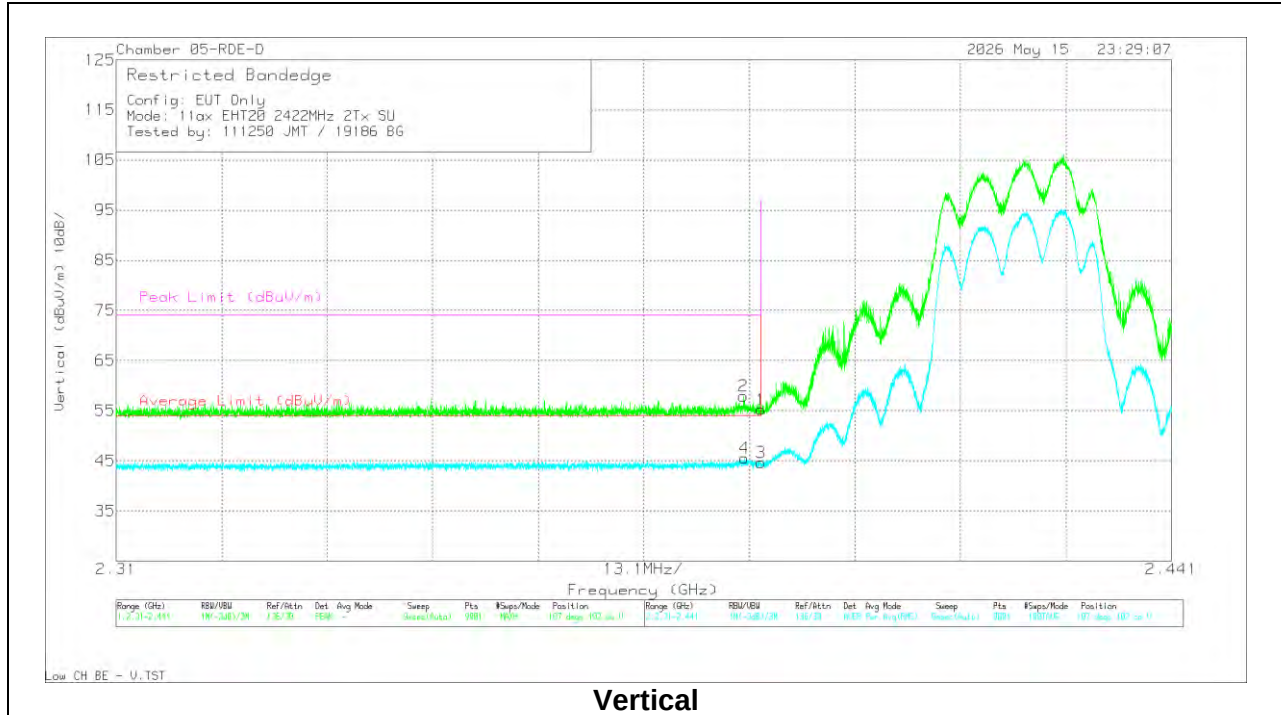VERTICAL RESULT**Trace Markers**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	8187 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*2.39	60.6	Pk	32.3	0	-37.67	55.23	-	-	74	-18.77	107	102	V
2	*2.387875	63.31	Pk	32.3	0	-37.67	57.94	-	-	74	-16.06	107	102	V
3	*2.39	50.01	RMS	32.3	0	-37.67	44.64	54	-9.36	-	-	107	102	V
4	*2.387976	50.87	RMS	32.3	0	-37.67	45.5	54	-8.5	-	-	107	102	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

9.1.7. 802.11n/be MIMO MODE – HIGH BANDEDGE – CHANNEL 9**State A**

DTS (MIMO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
HT20	2452	4+3	* 2.4835	72.05	Pk	32.2	0	-38.7	65.55	-	-	74	-8.45	19	182	H
			* 2.484949	74.18	Pk	32.2	0	-38.7	67.68	-	-	74	-6.32	19	182	H
			* 2.4835	56.13	RMS	32.2	0	-38.7	49.63	54	-4.37	-	-	19	182	H
			* 2.484596	57.9	RMS	32.2	0	-38.7	51.4	54	-2.6	-	-	19	182	H
			* 2.4835	66.23	Pk	32.2	0	-38.7	59.73	-	-	74	-14.27	191	105	V
			* 2.483566	67.17	Pk	32.2	0	-38.7	60.67	-	-	74	-13.33	191	105	V
			* 2.4835	51.96	RMS	32.2	0	-38.7	45.46	54	-8.54	-	-	191	105	V
EHT20 (SU Mode)	2452	4+3	* 2.483932	53.05	RMS	32.2	0	-38.7	46.55	54	-7.45	-	-	191	105	V
			* 2.4835	67.63	Pk	32.3	0	-40	59.93	-	-	74	-14.07	214	117	H
			* 2.485721	76.7	Pk	32.3	0	-40.07	68.93	-	-	74	-5.07	214	117	H
			* 2.4835	53.28	RMS	32.3	0	-40	45.58	54	-8.42	-	-	214	117	H
			* 2.485477	58.27	RMS	32.3	0	-40.05	50.52	54	-3.48	-	-	214	117	H
			* 2.4835	65.73	Pk	32.3	0	-40	58.03	-	-	74	-15.97	49	374	V
			* 2.485071	72.91	Pk	32.3	0	-40.01	65.2	-	-	74	-8.8	49	374	V
EHT20 (RU 26/ Index 0)	2452	4+3	* 2.4835	52.25	RMS	32.3	0	-40	44.55	54	-9.45	-	-	49	374	V
			* 2.485965	53.79	RMS	32.3	0	-40.1	45.99	54	-8.01	-	-	49	374	V
			* 2.4835	62.97	Pk	32.4	0	-36.91	58.46	-	-	74	-15.54	244	174	H
			* 2.483525	65.16	Pk	32.4	0	-36.9	60.66	-	-	74	-13.34	244	174	H
			* 2.4835	49.48	RMS	32.4	0	-36.91	44.97	54	-9.03	-	-	244	174	H
			* 2.48362	50.45	RMS	32.4	0	-36.9	45.95	54	-8.05	-	-	244	174	H
			* 2.4835	60.2	Pk	32.4	0	-36.91	55.69	-	-	74	-18.31	223	111	V
			2.520194	62.6	Pk	32.5	0	-36.91	58.19	-	-	74	-15.81	223	111	V
			* 2.4835	49.41	RMS	32.4	0	-36.91	44.9	54	-9.1	-	-	223	111	V
			* 2.495617	50.28	RMS	32.4	0	-36.88	45.8	54	-8.2	-	-	223	111	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

State B

DTS (MIMO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
HT20	2452	4+3	* 2.4835	66.04	Pk	32.1	0	-34.5	63.64	-	-	74	-10.36	251	126	H
			* 2.484691	68.3	Pk	32.1	0	-34.5	65.9	-	-	74	-8.1	251	126	H
			* 2.4835	52.13	RMS	32.1	0	-34.5	49.73	54	-4.27	-	-	251	126	H
			* 2.483566	53.26	RMS	32.1	0	-34.5	50.86	54	-3.14	-	-	251	126	H
			* 2.4835	59.71	Pk	32.1	0	-34.5	57.31	-	-	74	-16.69	115	325	V
			* 2.48484	63.48	Pk	32.1	0	-34.5	61.08	-	-	74	-12.92	115	325	V
			* 2.4835	48.91	RMS	32.1	0	-34.5	46.51	54	-7.49	-	-	115	325	V
			* 2.485531	50.41	RMS	32.2	0	-34.5	48.11	54	-5.89	-	-	115	325	V
EHT20 (SU Mode)	2452	4+3	* 2.4835	73.94	Pk	32.5	0	-40.12	66.32	-	-	74	-7.68	193	168	H
			* 2.483647	76.71	Pk	32.5	0	-40.11	69.1	-	-	74	-4.9	193	168	H
			* 2.4835	55.84	RMS	32.5	0	-40.12	48.22	54	-5.78	-	-	193	168	H
			* 2.483634	56.08	RMS	32.5	0	-40.11	48.47	54	-5.53	-	-	193	168	H
			* 2.4835	63.11	Pk	32.5	0	-40.12	55.49	-	-	74	-18.51	201	374	V
			* 2.483647	65.23	Pk	32.5	0	-40.11	57.62	-	-	74	-16.38	201	374	V
			* 2.4835	51.67	RMS	32.5	0	-40.12	44.05	54	-9.95	-	-	201	374	V
			* 2.483796	52.05	RMS	32.5	0	-40.11	44.44	54	-9.56	-	-	201	374	V
EHT20 (RU 26/ Index 0)	2452	4+3	* 2.4835	63.64	Pk	32.4	0	-36.91	59.13	-	-	74	-14.87	135	113	H
			* 2.483525	66.06	Pk	32.4	0	-36.9	61.56	-	-	74	-12.44	135	113	H
			* 2.4835	49.14	RMS	32.4	0	-36.91	44.63	54	-9.37	-	-	135	113	H
			* 2.484244	50.37	RMS	32.4	0	-36.91	45.86	54	-8.14	-	-	135	113	H
			* 2.4835	61.99	Pk	32.4	0	-36.91	57.48	-	-	74	-16.52	85	397	V
			* 2.483823	64.51	Pk	32.4	0	-36.9	60.01	-	-	74	-13.99	85	397	V
			* 2.4835	49.01	RMS	32.4	0	-36.91	44.5	54	-9.5	-	-	85	397	V
			* 2.484393	50.48	RMS	32.4	0	-36.91	45.97	54	-8.03	-	-	85	397	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

9.1.8. 802.11n/be SISO MODE – HIGH BANDEDGE – CHANNEL 10

State A

DTS (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
HT20	2457	4	* 2.4835	67.82	Pk	32.2	0	-38.7	61.32	-	-	74	-12.68	97	104	H
			* 2.483715	71.5	Pk	32.2	0	-38.7	65	-	-	74	-9	97	104	H
			* 2.4835	54.63	RMS	32.2	0	-38.7	48.13	54	-5.87	-	-	97	104	H
			* 2.483742	55.71	RMS	32.2	0	-38.7	49.21	54	-4.79	-	-	97	104	H
			* 2.4835	69.54	Pk	32.2	0	-38.7	63.04	-	-	74	-10.96	187	128	V
			* 2.48404	71.04	Pk	32.2	0	-38.7	64.54	-	-	74	-9.46	187	128	V
		3	* 2.4835	53.99	RMS	32.2	0	-38.7	47.49	54	-6.51	-	-	187	128	V
			* 2.483701	55.68	RMS	32.2	0	-38.7	49.18	54	-4.82	-	-	187	128	V
			* 2.4835	72.19	Pk	32.2	0	-38.7	65.69	-	-	74	-8.31	108	203	H
			* 2.483905	75.13	Pk	32.2	0	-38.7	68.63	-	-	74	-5.37	108	203	H
			* 2.4835	57.68	RMS	32.2	0	-38.7	51.18	54	-2.82	-	-	108	203	H
			* 2.483607	58.05	RMS	32.2	0	-38.7	51.55	54	-2.45	-	-	108	203	H
			* 2.4835	71.11	Pk	32.2	0	-38.7	64.61	-	-	74	-9.39	17	309	V
			* 2.483607	73.21	Pk	32.2	0	-38.7	66.71	-	-	74	-7.29	17	309	V
			* 2.4835	55.75	RMS	32.2	0	-38.7	49.25	54	-4.75	-	-	17	309	V
			* 2.483864	56.44	RMS	32.2	0	-38.7	49.94	54	-4.06	-	-	17	309	V
EHT20 (SU Mode)	2457	4	* 2.4835	67.44	Pk	32.1	0	-34.5	65.04	-	-	74	-8.96	168	222	H
			* 2.483851	68.7	Pk	32.1	0	-34.5	66.3	-	-	74	-7.7	168	222	H
			* 2.4835	50.64	RMS	32.1	0	-34.5	48.24	54	-5.76	-	-	168	222	H
			* 2.483647	51.64	RMS	32.1	0	-34.5	49.24	54	-4.76	-	-	168	222	H
			* 2.4835	70.39	Pk	32.1	0	-34.5	67.99	-	-	74	-6.01	251	104	V
			* 2.483661	70.67	Pk	32.1	0	-34.5	68.27	-	-	74	-5.73	251	104	V
		3	* 2.4835	52.43	RMS	32.1	0	-34.5	50.03	54	-3.97	-	-	251	104	V
			* 2.483729	53.68	RMS	32.1	0	-34.5	51.28	54	-2.72	-	-	251	104	V
			* 2.4835	68.74	Pk	32.1	0	-34.5	66.34	-	-	74	-7.66	182	160	H
			* 2.483525	70.62	Pk	32.1	0	-34.5	68.22	-	-	74	-5.78	182	160	H
			* 2.4835	52.65	RMS	32.1	0	-34.5	50.25	54	-3.75	-	-	182	160	H
			* 2.483579	52.96	RMS	32.1	0	-34.5	50.56	54	-3.44	-	-	182	160	H
			* 2.4835	66.44	Pk	32.1	0	-34.5	64.04	-	-	74	-9.96	111	273	V
			* 2.483701	68.57	Pk	32.1	0	-34.5	66.17	-	-	74	-7.83	111	273	V
			* 2.4835	51.11	RMS	32.1	0	-34.5	48.71	54	-5.29	-	-	111	273	V
			* 2.484162	51.96	RMS	32.1	0	-34.5	49.56	54	-4.44	-	-	111	273	V
EHT20 (RU 26 / Index 8)	2457	4	* 2.4835	59.37	Pk	32.1	0	-34.5	56.97	-	-	74	-17.03	156	192	H
			* 2.4835	48.83	RMS	32.1	0	-34.5	46.43	54	-7.57	-	-	156	192	H
			2.516832	62.01	Pk	32.3	0	-34.43	59.88	-	-	74	-14.12	156	192	H
			2.522336	49.61	RMS	32.3	0	-34.43	47.48	54	-6.52	-	-	156	192	H
			* 2.4835	59.1	Pk	32.1	0	-34.5	56.7	-	-	74	-17.3	224	109	V
			* 2.4835	48.44	RMS	32.1	0	-34.5	46.04	54	-7.96	-	-	224	109	V
		3	2.516087	49.47	RMS	32.3	0	-34.42	47.35	54	-6.65	-	-	224	109	V
			2.559317	61.82	Pk	32.1	0	-34.37	59.55	-	-	74	-14.45	224	109	V
			* 2.4835	66.29	Pk	32.1	0	-34.5	63.89	-	-	74	-10.11	181	182	H
			* 2.483986	66.48	Pk	32.1	0	-34.5	64.08	-	-	74	-9.92	181	182	H
			* 2.4835	49.07	RMS	32.1	0	-34.5	46.67	54	-7.33	-	-	181	182	H
			* 2.484149	49.73	RMS	32.1	0	-34.5	47.33	54	-6.67	-	-	181	182	H
			* 2.4835	62.91	Pk	32.1	0	-34.5	60.51	-	-	74	-13.49	99	275	V
			* 2.483647	64.89	Pk	32.1	0	-34.5	62.49	-	-	74	-11.51	99	275	V
			* 2.4835	49.44	RMS	32.1	0	-34.5	47.04	54	-6.96	-	-	99	275	V
			* 2.484244	49.75	RMS	32.1	0	-34.5	47.35	54	-6.65	-	-	99	275	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

State B

DTS (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
HT20	2457	4	* 2.4835	75.62	Pk	29	0	-40.1	64.52	-	-	74	-9.48	141	155	H
			* 2.483634	76.35	Pk	29	0	-40.1	65.25	-	-	74	-8.75	141	155	H
			* 2.4835	58.19	RMS	29	0	-40.1	47.09	54	-6.91	-	-	141	155	H
			* 2.483661	59.2	RMS	29	0	-40.1	48.1	54	-5.9	-	-	141	155	H
			* 2.4835	73.52	Pk	29	0	-40.1	62.42	-	-	74	-11.58	118	372	V
			* 2.483512	73.19	Pk	29	0	-40.1	62.09	-	-	74	-11.91	118	372	V
		3	* 2.4835	56.39	RMS	29	0	-40.1	45.29	54	-8.71	-	-	118	372	V
			* 2.483715	56.41	RMS	29	0	-40.1	45.31	54	-8.69	-	-	118	372	V
			* 2.4835	54.5	Pk	32.1	0	-34.5	52.1	-	-	74	-21.9	253	331	H
			2.510671	56.59	Pk	32	0	-34.4	54.19	-	-	74	-19.81	253	331	H
			* 2.4835	43.05	RMS	32.1	0	-34.5	40.65	54	-13.35	-	-	253	331	H
			* 2.483828	43.98	RMS	32.1	0	-34.5	41.58	54	-12.42	-	-	253	331	H
			* 2.4835	53.83	Pk	32.1	0	-34.5	51.43	-	-	74	-22.57	341	369	V
			* 2.489166	56.22	Pk	32.1	0	-34.4	53.92	-	-	74	-20.08	341	369	V
			* 2.4835	43.29	RMS	32.1	0	-34.5	40.89	54	-13.11	-	-	341	369	V
			* 2.487198	44	RMS	32.1	0	-34.4	41.7	54	-12.3	-	-	341	369	V
EHT20 (SU Mode)	2457	4	* 2.4835	69.59	Pk	32.1	0	-34.5	67.19	-	-	74	-6.81	47	164	H
			* 2.483729	70.16	Pk	32.1	0	-34.5	67.76	-	-	74	-6.24	47	164	H
			* 2.4835	52.62	RMS	32.1	0	-34.5	50.22	54	-3.78	-	-	47	164	H
			* 2.483647	52.96	RMS	32.1	0	-34.5	50.56	54	-3.44	-	-	47	164	H
			* 2.4835	63.93	Pk	32.1	0	-34.5	61.53	-	-	74	-12.47	77	331	V
			* 2.483742	65.76	Pk	32.1	0	-34.5	63.36	-	-	74	-10.64	77	331	V
			* 2.4835	50.36	RMS	32.1	0	-34.5	47.96	54	-6.04	-	-	77	331	V
			* 2.483512	50.98	RMS	32.1	0	-34.5	48.58	54	-5.42	-	-	77	331	V
		3	* 2.4835	74.3	Pk	32.2	0	-38.7	67.8	-	-	74	-6.2	37	105	H
			* 2.483864	75.99	Pk	32.2	0	-38.7	69.49	-	-	74	-4.51	37	105	H
			* 2.4835	56.02	RMS	32.2	0	-38.7	49.52	54	-4.48	-	-	37	105	H
			* 2.483674	57.57	RMS	32.2	0	-38.7	51.07	54	-2.93	-	-	37	105	H
			* 2.4835	70	Pk	32.2	0	-38.7	63.5	-	-	74	-10.5	301	329	V
			* 2.483552	74.33	Pk	32.2	0	-38.7	67.83	-	-	74	-6.17	301	329	V
			* 2.4835	54.91	RMS	32.2	0	-38.7	48.41	54	-5.59	-	-	301	329	V
			* 2.483539	55.11	RMS	32.2	0	-38.7	48.61	54	-5.39	-	-	301	329	V
EHT20 (RU 26 / Index 8)	2457	4	* 2.4835	67.28	Pk	32.4	0	-38.32	61.36	-	-	74	-12.64	268	189	H
			* 2.483525	68.68	Pk	32.4	0	-38.32	62.76	-	-	74	-11.24	268	189	H
			* 2.4835	50.61	RMS	32.4	0	-38.32	44.69	54	-9.31	-	-	268	189	H
			* 2.545923	50.79	RMS	32.5	0	-38.13	45.16	54	-8.84	-	-	268	189	H
			* 2.4835	62.53	Pk	32.4	0	-38.32	56.61	-	-	74	-17.39	149	347	V
			* 2.483661	64.77	Pk	32.4	0	-38.32	58.85	-	-	74	-15.15	149	347	V
			* 2.4835	49.51	RMS	32.4	0	-38.32	43.59	54	-10.41	-	-	149	347	V
			* 2.551969	50.53	RMS	32.5	0	-38.06	44.97	54	-9.03	-	-	149	347	V
		3	* 2.4835	70.23	Pk	32.2	0	-38.7	63.73	-	-	74	-10.27	82	131	H
			* 2.48362	69.84	Pk	32.2	0	-38.7	63.34	-	-	74	-10.66	82	131	H
			* 2.4835	49.85	RMS	32.2	0	-38.7	43.35	54	-10.65	-	-	82	131	H
			* 2.484108	51.86	RMS	32.2	0	-38.7	45.36	54	-8.64	-	-	82	131	H
			* 2.4835	63.57	Pk	32.2	0	-38.7	57.07	-	-	74	-16.93	338	377	V
			* 2.483647	65.46	Pk	32.2	0	-38.7	58.96	-	-	74	-15.04	338	377	V
			* 2.4835	49.68	RMS	32.2	0	-38.7	43.18	54	-10.82	-	-	338	377	V
			2.55586	50.31	RMS	32.4	0	-38.4	44.31	54	-9.69	-	-	338	377	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

9.1.9. 802.11b/n/be MIMO MODE – HIGH BANDEDGE – CHANNEL 10**State A**

DTS (MIMO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
b-Mode	2457	4+3	* 2.4835	60.42	Pk	32.6	0	-37.6	55.42	-	-	74	-18.58	185	135	H
			2.515395	62.19	Pk	32.8	0	-37.6	57.39	-	-	74	-16.61	185	135	H
			* 2.4835	48.79	RMS	32.6	0	-37.6	43.79	54	-10.21	-	-	185	135	H
			* 2.48362	50.52	RMS	32.6	0	-37.6	45.52	54	-8.48	-	-	185	135	H
			* 2.4835	59.41	Pk	32.6	0	-37.6	54.41	-	-	74	-19.59	213	149	V
			2.540989	61.77	Pk	32.8	0	-37.6	56.97	-	-	74	-17.03	213	149	V
			* 2.4835	48.51	RMS	32.6	0	-37.6	43.51	54	-10.49	-	-	213	149	V
			2.540731	49.93	RMS	32.8	0	-37.6	45.13	54	-8.87	-	-	213	149	V
			* 2.4835	70.9	Pk	32.2	0	-38.7	64.4	-	-	74	-9.6	15	132	H
			* 2.484257	73.57	Pk	32.2	0	-38.7	67.07	-	-	74	-6.93	15	132	H
HT20	2457	4+3	* 2.4835	56.07	RMS	32.2	0	-38.7	49.57	54	-4.43	-	-	15	132	H
			* 2.483864	57.97	RMS	32.2	0	-38.7	51.47	54	-2.53	-	-	15	132	H
			* 2.4835	60.71	Pk	32.2	0	-38.7	54.21	-	-	74	-19.79	17	123	V
			* 2.484311	64.48	Pk	32.2	0	-38.7	57.98	-	-	74	-16.02	17	123	V
			* 2.4835	50.16	RMS	32.2	0	-38.7	43.66	54	-10.34	-	-	17	123	V
			* 2.483566	50.8	RMS	32.2	0	-38.7	44.3	54	-9.7	-	-	17	123	V
			* 2.4835	70.73	Pk	32.3	0	-40	63.03	-	-	74	-10.97	218	146	H
			* 2.486087	75.4	Pk	32.3	0	-40.09	67.61	-	-	74	-6.39	218	146	H
EHT20 (SU Mode)	2457	4+3	* 2.4835	54.98	RMS	32.3	0	-40	47.28	54	-6.72	-	-	218	146	H
			* 2.485599	58.28	RMS	32.3	0	-40.06	50.52	54	-3.48	-	-	218	146	H
			* 2.4835	64.61	Pk	32.3	0	-40	56.91	-	-	74	-17.09	261	146	V
			* 2.483512	65.75	Pk	32.3	0	-40	58.05	-	-	74	-15.95	261	146	V
			* 2.4835	51.48	RMS	32.3	0	-40	43.78	54	-10.22	-	-	261	146	V
			* 2.485233	52.2	RMS	32.3	0	-40.02	44.48	54	-9.52	-	-	261	146	V
			* 2.4835	66.11	Pk	32.4	0	-36.91	61.6	-	-	74	-12.4	246	118	H
			* 2.483552	67.47	Pk	32.4	0	-36.9	62.97	-	-	74	-11.03	246	118	H
EHT20 (RU 26/ Index 0)	2457	4+3	* 2.4835	50.35	RMS	32.4	0	-36.91	45.84	54	-8.16	-	-	246	118	H
			* 2.483647	51.73	RMS	32.4	0	-36.9	47.23	54	-6.77	-	-	246	118	H
			* 2.4835	60.97	Pk	32.4	0	-36.91	56.46	-	-	74	-17.54	32	102	V
			* 2.48522	63.71	Pk	32.4	0	-36.93	59.18	-	-	74	-14.82	32	102	V
			* 2.4835	49.11	RMS	32.4	0	-36.91	44.6	54	-9.4	-	-	32	102	V
			2.519381	50.14	RMS	32.5	0	-36.91	45.73	54	-8.27	-	-	32	102	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

State B

DTS (MIMO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
b-Mode	2457	4+3	* 2.4835	60.12	Pk	32.6	0	-37.6	55.12	-	-	74	-18.88	274	133	H
			2.537844	62.07	Pk	32.8	0	-37.6	57.27	-	-	74	-16.73	274	133	H
			* 2.4835	49.19	RMS	32.6	0	-37.6	44.19	54	-9.81	-	-	274	133	H
			* 2.484406	50.31	RMS	32.6	0	-37.6	45.31	54	-8.69	-	-	274	133	H
			* 2.4835	59.73	Pk	32.6	0	-37.6	54.73	-	-	74	-19.27	325	367	V
			2.533872	62.42	Pk	32.8	0	-37.6	57.62	-	-	74	-16.38	325	367	V
			* 2.4835	49.16	RMS	32.6	0	-37.6	44.16	54	-9.84	-	-	325	367	V
			2.511288	50.07	RMS	32.8	0	-37.6	45.27	54	-8.73	-	-	325	367	V
HT20	2457	4+3	* 2.4835	67.54	Pk	32.1	0	-34.5	65.14	-	-	74	-8.86	243	124	H
			* 2.483539	68.97	Pk	32.1	0	-34.5	66.57	-	-	74	-7.43	243	124	H
			* 2.4835	52.84	RMS	32.1	0	-34.5	50.44	54	-3.56	-	-	243	124	H
			* 2.483607	53.43	RMS	32.1	0	-34.5	51.03	54	-2.97	-	-	243	124	H
			* 2.4835	59.54	Pk	32.1	0	-34.5	57.14	-	-	74	-16.86	188	154	V
			* 2.4835	48.81	RMS	32.1	0	-34.5	46.41	54	-7.59	-	-	188	154	V
			2.506909	61.59	Pk	32.3	0	-34.46	59.43	-	-	74	-14.57	188	154	V
			2.549421	49.55	RMS	32.2	0	-34.39	47.36	54	-6.64	-	-	188	154	V
EHT20 (SU Mode)	2457	4+3	* 2.4835	71.82	Pk	32.4	0	-37.41	66.81	-	-	74	-7.19	238	135	H
			* 2.483552	73.02	Pk	32.4	0	-37.41	68.01	-	-	74	-5.99	238	135	H
			* 2.4835	55.12	RMS	32.4	0	-37.41	50.11	54	-3.89	-	-	238	135	H
			* 2.483566	55.81	RMS	32.4	0	-37.41	50.8	54	-3.2	-	-	238	135	H
			* 2.4835	61.42	Pk	32.4	0	-37.41	56.41	-	-	74	-17.59	267	331	V
			* 2.48381	63.06	Pk	32.4	0	-37.4	58.06	-	-	74	-15.94	267	331	V
			* 2.4835	50.12	RMS	32.4	0	-37.41	45.11	54	-8.89	-	-	267	331	V
			* 2.484149	50.68	RMS	32.4	0	-37.4	45.68	54	-8.32	-	-	267	331	V
EHT20 (RU 26/ Index 0)	2457	4+3	* 2.4835	68.37	Pk	32.4	0	-36.91	63.86	-	-	74	-10.14	129	111	H
			* 2.483796	68.35	Pk	32.4	0	-36.9	63.85	-	-	74	-10.15	129	111	H
			* 2.4835	49.46	RMS	32.4	0	-36.91	44.95	54	-9.05	-	-	129	111	H
			* 2.48362	50.83	RMS	32.4	0	-36.9	46.33	54	-7.67	-	-	129	111	H
			* 2.4835	65.48	Pk	32.4	0	-36.91	60.97	-	-	74	-13.03	82	394	V
			* 2.483593	67.68	Pk	32.4	0	-36.9	63.18	-	-	74	-10.82	82	394	V
			* 2.4835	49.64	RMS	32.4	0	-36.91	45.13	54	-8.87	-	-	82	394	V
			2.511396	50.14	RMS	32.5	0	-36.88	45.76	54	-8.24	-	-	82	394	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

9.1.10. 802.11b/n/be SISO MODE – HIGH BANDEDGE – CHANNEL 11

State A

DTS (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
b-Mode	2462	4	* 2.4835	61.65	Pk	32.5	0	-40.25	53.9	-	-	74	-20.1	158	234	H
			* 2.485762	63.84	Pk	32.5	0	-40.3	56.04	-	-	74	-17.96	158	234	H
			* 2.4835	50.62	RMS	32.5	0	-40.25	42.87	54	-11.13	-	-	158	234	H
			* 2.544026	51.14	RMS	32.5	0	-39.6	44.04	-	-	-	-	158	234	H
			* 2.4835	62.28	Pk	32.5	0	-40.25	54.53	-	-	74	-19.47	238	114	V
			* 2.537993	63.57	Pk	32.5	0	-39.7	56.37	-	-	-	-	238	114	V
			* 2.4835	50.77	RMS	32.5	0	-40.25	43.02	54	-10.98	-	-	238	114	V
			* 2.562977	50.96	RMS	32.5	0	-39.4	44.06	-	-	-	-	238	114	V
			* 2.4835	60.32	Pk	32.5	0	-34.17	58.65	-	-	74	-15.35	249	245	H
			* 2.543917	62.03	Pk	32.6	0	-34.12	60.51	-	-	-	-	249	245	H
HT20	2462	3	* 2.4835	48.55	RMS	32.5	0	-34.17	46.88	54	-7.12	-	-	249	245	H
			* 2.55544	49.88	RMS	32.6	0	-34.09	48.39	-	-	-	-	249	245	H
			* 2.4835	58.8	Pk	32.5	0	-34.17	57.13	-	-	74	-16.87	116	218	V
			* 2.557934	61.81	Pk	32.6	0	-34.1	60.31	-	-	-	-	116	218	V
			* 2.4835	48.95	RMS	32.5	0	-34.17	47.28	54	-6.72	-	-	116	218	V
			* 2.551143	49.95	RMS	32.6	0	-34.07	48.48	-	-	-	-	116	218	V
		4	* 2.4835	70.25	Pk	34	0	-40.09	64.16	-	-	74	-9.84	288	202	H
			* 2.483634	72.75	Pk	34	0	-40.09	66.66	-	-	74	-7.34	288	202	H
			* 2.4835	55.02	RMS	34	0	-40.09	48.93	54	-5.07	-	-	288	202	H
			* 2.48362	55.56	RMS	34	0	-40.09	49.47	54	-4.53	-	-	288	202	H
			* 2.4835	70.82	Pk	34	0	-40.09	64.73	-	-	74	-9.27	234	238	V
			* 2.484013	71.63	Pk	34	0	-40.1	65.53	-	-	74	-8.47	234	238	V
			* 2.4835	54.64	RMS	34	0	-40.09	48.55	54	-5.45	-	-	234	238	V
			* 2.483756	55.35	RMS	34	0	-40.1	49.25	54	-4.75	-	-	234	238	V
		3	* 2.4835	75.05	Pk	32.2	0	-38.7	68.55	-	-	74	-5.45	97	197	H
			* 2.483688	76.88	Pk	32.2	0	-38.7	70.38	-	-	74	-3.62	97	197	H
			* 2.4835	56.92	RMS	32.2	0	-38.7	50.42	54	-3.58	-	-	97	197	H
			* 2.483593	57.94	RMS	32.2	0	-38.7	51.44	54	-2.56	-	-	97	197	H
			* 2.4835	76.25	Pk	32.2	0	-38.7	69.75	-	-	74	-4.25	15	307	V
			* 2.483756	74.81	Pk	32.2	0	-38.7	68.31	-	-	74	-5.69	15	307	V
			* 2.4835	57.14	RMS	32.2	0	-38.7	50.64	54	-3.36	-	-	15	307	V
			* 2.483823	57.79	RMS	32.2	0	-38.7	51.29	54	-2.71	-	-	15	307	V
EHT20 (SU Mode)	2462	4	* 2.4835	72.94	Pk	32.3	0	-40	65.24	-	-	74	-8.76	346	144	H
			* 2.483918	76.83	Pk	32.3	0	-40	69.13	-	-	74	-4.87	346	144	H
			* 2.4835	56.17	RMS	32.3	0	-40	48.47	54	-5.53	-	-	346	144	H
			* 2.484488	56.53	RMS	32.3	0	-40	48.83	54	-5.17	-	-	346	144	H
			* 2.4835	70.2	Pk	32.3	0	-40	62.5	-	-	74	-11.5	73	164	V
			* 2.484067	72.43	Pk	32.3	0	-40	64.73	-	-	74	-9.27	73	164	V
			* 2.4835	54.59	RMS	32.3	0	-40	46.89	54	-7.11	-	-	73	164	V
			* 2.483525	55.42	RMS	32.3	0	-40	47.72	54	-6.28	-	-	73	164	V
		3	* 2.4835	67.1	Pk	32.4	0	-37.41	62.09	-	-	74	-11.91	7	336	H
			* 2.483823	74.06	Pk	32.4	0	-37.4	69.06	-	-	74	-4.94	7	336	H
			* 2.4835	52.18	RMS	32.4	0	-37.41	47.17	54	-6.83	-	-	7	336	H
			* 2.483796	53.7	RMS	32.4	0	-37.4	48.7	54	-5.3	-	-	7	336	H
			* 2.4835	68.25	Pk	32.4	0	-37.41	63.24	-	-	74	-10.76	309	319	V
			* 2.483701	71.11	Pk	32.4	0	-37.41	66.1	-	-	74	-7.9	309	319	V
			* 2.4835	50.49	RMS	32.4	0	-37.41	45.48	54	-8.52	-	-	309	319	V
			* 2.48362	52.03	RMS	32.4	0	-37.41	47.02	54	-6.98	-	-	309	319	V
EHT20 (RU 26 / Index 8)	2462	4	* 2.4835	74.13	Pk	32.6	0	-37.6	69.13	-	-	74	-4.87	115	175	H
			* 2.483918	74.38	Pk	32.6	0	-37.6	69.38	-	-	74	-4.62	115	175	H
			* 2.4835	50.23	RMS	32.6	0	-37.6	45.23	54	-8.77	-	-	115	175	H
			* 2.484528	53.13	RMS	32.6	0	-37.6	48.13	54	-5.87	-	-	115	175	H
			* 2.4835	72.43	Pk	32.6	0	-37.6	67.43	-	-	74	-6.57	229	107	V
			* 2.483579	74.04	Pk	32.6	0	-37.6	69.04	-	-	74	-4.96	229	107	V
			* 2.4835	49.59	RMS	32.6	0	-37.6	44.59	54	-9.41	-	-	229	107	V
			* 2.48442	53.15	RMS	32.6	0	-37.6	48.15	54	-5.85	-	-	229	107	V
		3	* 2.4835	69.99	Pk	32.1	0	-34.5	67.59	-	-	74	-6.41	182	231	H
			* 2.483769	71.53	Pk	32.1	0	-34.5	69.13	-	-	74	-4.87	182	231	H
			* 2.4835	49.36	RMS	32.1	0	-34.5	46.96	54	-7.04	-	-	182	231	H
			* 2.483593	51.18	RMS	32.1	0	-34.5	48.78	54	-5.22	-	-	182	231	H
			* 2.4835	69.91	Pk	32.1	0	-34.5	67.51	-	-	74	-6.49	100	316	V
			* 2.483905	69.46	Pk	32.1	0	-34.5	67.06	-	-	74	-6.94	100	316	V
			* 2.4835	48.41	RMS	32.1	0	-34.5	46.01	54	-7.99	-	-	100	316	V
			* 2.484176	50.64	RMS	32.1	0	-34.5	48.24	54	-5.76	-	-	100	316	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

State B

DTS (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
b-Mode	2462	4	* 2.4835	53.85	Pk	32.1	0	-34.5	51.45	-	-	74	-22.55	188	115	H
			2.507072	55.87	Pk	32.1	0	-34.3	53.67	-	-	-	-	188	115	H
			* 2.4835	43.13	RMS	32.1	0	-34.5	40.73	54	-13.27	-	-	188	115	H
			2.517901	43.8	RMS	32.1	0	-34.4	41.5	-	-	-	-	188	115	H
			* 2.4835	53.85	Pk	32.1	0	-34.5	51.45	-	-	74	-22.55	348	352	V
			2.531033	56.27	Pk	32	0	-34.3	53.97	-	-	-	-	348	352	V
			* 2.4835	42.52	RMS	32.1	0	-34.5	40.12	54	-13.88	-	-	348	352	V
			* 2.496929	44.07	RMS	32.1	0	-34.4	41.77	54	-12.23	-	-	348	352	V
		3	* 2.4835	53.5	Pk	32.1	0	-34.5	51.1	-	-	74	-22.9	157	362	H
			* 2.499003	56.26	Pk	32	0	-34.4	53.86	-	-	74	-20.14	157	362	H
			* 2.4835	43.24	RMS	32.1	0	-34.5	40.84	54	-13.16	-	-	157	362	H
			* 2.486832	43.81	RMS	32.1	0	-34.4	41.51	54	-12.49	-	-	157	362	H
			* 2.4835	53.5	Pk	32.1	0	-34.5	51.1	-	-	74	-22.9	245	370	V
			2.523224	56.63	Pk	32.1	0	-34.4	54.33	-	-	-	-	245	370	V
			* 2.4835	43.15	RMS	32.1	0	-34.5	40.75	54	-13.25	-	-	245	370	V
			2.510214	44.01	RMS	32	0	-34.4	41.61	-	-	-	-	245	370	V
HT20	2462	4	* 2.4835	74.17	Pk	32.3	0	-39.37	67.1	-	-	74	-6.9	90	153	H
			* 2.483525	75.81	Pk	32.3	0	-39.37	68.74	-	-	74	-5.26	90	153	H
			* 2.4835	56.35	RMS	32.3	0	-39.37	49.28	54	-4.72	-	-	90	153	H
			* 2.483796	57.53	RMS	32.3	0	-39.37	50.46	54	-3.54	-	-	90	153	H
			* 2.4835	67.77	Pk	32.3	0	-39.37	60.7	-	-	74	-13.3	125	352	V
			* 2.483579	69.84	Pk	32.3	0	-39.37	62.77	-	-	74	-11.23	125	352	V
			* 2.4835	52.7	RMS	32.3	0	-39.37	45.63	54	-8.37	-	-	125	352	V
			* 2.483512	53.93	RMS	32.3	0	-39.37	46.86	54	-7.14	-	-	125	352	V
		3	* 2.4835	62.31	Pk	32.1	0	-34.5	59.91	-	-	74	-14.09	246	375	H
			* 2.483782	63.73	Pk	32.1	0	-34.5	61.33	-	-	74	-12.67	246	375	H
			* 2.4835	47.2	RMS	32.1	0	-34.5	44.8	54	-9.2	-	-	246	375	H
			* 2.483523	47.88	RMS	32.1	0	-34.5	45.48	54	-8.52	-	-	246	375	H
			* 2.4835	63.35	Pk	32.1	0	-34.5	60.95	-	-	74	-13.05	340	368	V
			* 2.48366	64.66	Pk	32.1	0	-34.5	62.26	-	-	74	-11.74	340	368	V
			* 2.4835	47.41	RMS	32.1	0	-34.5	45.01	54	-8.99	-	-	340	368	V
			* 2.483553	48.23	RMS	32.1	0	-34.5	45.83	54	-8.17	-	-	340	368	V
EHT20 (SU Mode)	2462	4	* 2.4835	69.68	Pk	32.4	0	-37.41	64.67	-	-	74	-9.33	247	209	H
			* 2.483661	74.45	Pk	32.4	0	-37.41	69.44	-	-	74	-4.56	247	209	H
			* 2.4835	53.77	RMS	32.4	0	-37.41	48.76	54	-5.24	-	-	247	209	H
			* 2.48404	54.32	RMS	32.4	0	-37.4	49.32	54	-4.68	-	-	247	209	H
			* 2.4835	67.17	Pk	32.4	0	-37.41	62.16	-	-	74	-11.84	191	366	V
			* 2.483769	71.65	Pk	32.4	0	-37.4	66.65	-	-	74	-7.35	191	366	V
			* 2.4835	51.58	RMS	32.4	0	-37.41	46.57	54	-7.43	-	-	191	366	V
			* 2.48381	52.53	RMS	32.4	0	-37.4	47.53	54	-6.47	-	-	191	366	V
		3	* 2.4835	72.64	Pk	32.4	0	-37.41	67.63	-	-	74	-6.37	144	170	H
			* 2.483661	73.31	Pk	32.4	0	-37.41	68.3	-	-	74	-5.7	144	170	H
			* 2.4835	53.81	RMS	32.4	0	-37.41	48.8	54	-5.2	-	-	144	170	H
			* 2.48381	55.94	RMS	32.4	0	-37.4	50.94	54	-3.06	-	-	144	170	H
			* 2.4835	66.49	Pk	32.4	0	-37.41	61.48	-	-	74	-12.52	297	374	V
			* 2.484135	66.5	Pk	32.4	0	-37.4	61.5	-	-	74	-12.5	297	374	V
			* 2.4835	50.69	RMS	32.4	0	-37.41	45.68	54	-8.32	-	-	297	374	V
			* 2.483525	51.52	RMS	32.4	0	-37.41	46.51	54	-7.49	-	-	297	374	V
EHT20 (RU 26 / Index 8)	2462	4	* 2.4835	69.11	Pk	32.4	0	-38.32	63.19	-	-	74	-10.81	355	206	H
			* 2.483539	69.64	Pk	32.4	0	-38.32	63.72	-	-	74	-10.28	355	206	H
			* 2.4835	50.57	RMS	32.4	0	-38.32	44.65	54	-9.35	-	-	355	206	H
			* 2.484271	51.83	RMS	32.4	0	-38.31	45.92	54	-8.08	-	-	355	206	H
			* 2.4835	69.07	Pk	32.4	0	-38.32	63.15	-	-	74	-10.85	294	306	V
			* 2.483851	69.66	Pk	32.4	0	-38.32	63.74	-	-	74	-10.26	294	306	V
			* 2.4835	49.97	RMS	32.4	0	-38.32	44.05	54	-9.95	-	-	294	306	V
			* 2.483891	51.22	RMS	32.4	0	-38.32	45.3	54	-8.7	-	-	294	306	V
		3	* 2.4835	74.2	Pk	32.2	0	-38.7	67.7	-	-	74	-6.3	85	151	H
			* 2.483607	75.1	Pk	32.2	0	-38.7	68.6	-	-	74	-5.4	85	151	H
			* 2.4835	51.13	RMS	32.2	0	-38.7	44.63	54	-9.37	-	-	85	151	H
			* 2.484135	53.93	RMS	32.2	0	-38.7	47.43	54	-6.57	-	-	85	151	H
			* 2.4835	65.14	Pk	32.2	0	-38.7	58.64	-	-	74	-15.36	324	325	V
			* 2.483959	68.6	Pk	32.2	0	-38.7	62.1	-	-	74	-11.9	324	325	V
			* 2.4835	49.15	RMS	32.2	0	-38.7	42.65	54	-11.35	-	-	324	325	V
			* 2.484271	50.77	RMS	32.2	0	-38.7	44.27	54	-9.73	-	-	324	325	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

9.1.11. 802.11b/n/be MIMO CDD MODE – HIGH BANDEDGE – CHANNEL 11

State A

DTS (MIMO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
b-Mode	2462	4+3	*2.4835	59.47	Pk	32.5	0	-34.17	57.8	-	-	74	-16.2	163	120	H
			2.513525	62.08	Pk	32.5	0	-34.12	60.46	-	-	-	-	163	120	H
			*2.4835	49.15	RMS	32.5	0	-34.17	47.48	54	-6.52	-	-	163	120	H
			2.562069	50.17	RMS	32.6	0	-34.05	48.72	-	-	-	-	163	120	H
			*2.4835	59.07	Pk	32.5	0	-34.17	57.4	-	-	74	-16.6	33	355	V
			2.561608	62.05	Pk	32.6	0	-34.06	60.59	-	-	-	-	33	355	V
			*2.4835	48.71	RMS	32.5	0	-34.17	47.04	54	-6.96	-	-	33	355	V
			2.536407	49.84	RMS	32.6	0	-34.12	48.32	-	-	-	-	33	355	V
HT20	2462	4+3	*2.4835	68.58	Pk	32.5	0	-34.17	66.91	-	-	74	-7.09	125	121	H
			*2.484095	69.69	Pk	32.5	0	-34.17	68.02	-	-	74	-5.98	125	121	H
			*2.4835	52.26	RMS	32.5	0	-34.17	50.59	54	-3.41	-	-	125	121	H
			*2.483823	53	RMS	32.5	0	-34.17	51.33	54	-2.67	-	-	125	121	H
			*2.4835	64.22	Pk	32.5	0	-34.17	62.55	-	-	74	-11.45	297	111	V
			*2.483552	64.7	Pk	32.5	0	-34.17	63.03	-	-	74	-10.97	297	111	V
			*2.4835	49.89	RMS	32.5	0	-34.17	48.22	54	-5.78	-	-	297	111	V
			*2.483539	50.71	RMS	32.5	0	-34.17	49.04	54	-4.96	-	-	297	111	V
EHT20 (SU Mode)	2462	4+3	* 2.4835	67.99	Pk	32.3	0	-40	60.29	-	-	74	-13.71	214	121	H
			* 2.484705	76.51	Pk	32.3	0	-40	68.81	-	-	74	-5.19	214	121	H
			* 2.4835	52.66	RMS	32.3	0	-40	44.96	54	-9.04	-	-	214	121	H
			* 2.485396	57.41	RMS	32.3	0	-40.04	49.67	54	-4.33	-	-	214	121	H
			* 2.4835	70.49	Pk	32.3	0	-40	62.79	-	-	74	-11.21	43	361	V
			* 2.484569	74.53	Pk	32.3	0	-40	66.83	-	-	74	-7.17	43	361	V
			* 2.4835	53.98	RMS	32.3	0	-40	46.28	54	-7.72	-	-	43	361	V
			* 2.485003	56.05	RMS	32.3	0	-40	48.35	54	-5.65	-	-	43	361	V
EHT20 (RU 26 / Index 8)	2462	4+3	* 2.4835	73.23	Pk	32.3	0	-40	65.53	-	-	74	-8.47	214	121	H
			* 2.483525	75.45	Pk	32.3	0	-40	67.75	-	-	74	-6.25	214	121	H
			* 2.4835	51.71	RMS	32.3	0	-40	44.01	54	-9.99	-	-	214	121	H
			* 2.484311	53.84	RMS	32.3	0	-40	46.14	54	-7.86	-	-	214	121	H
			* 2.4835	70.67	Pk	32.3	0	-40	62.97	-	-	74	-11.03	43	361	V
			* 2.483634	72.56	Pk	32.3	0	-40	64.86	-	-	74	-9.14	43	361	V
			* 2.4835	51.03	RMS	32.3	0	-40	43.33	54	-10.67	-	-	43	361	V
			* 2.484596	53.32	RMS	32.3	0	-40	45.62	54	-8.38	-	-	43	361	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

State B

DTS (MIMO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
b-Mode	2462	4+3	* 2.4835	59.13	Pk	32.2	0	-34	57.33	-	-	74	-16.67	164	101	H
			2.514311	61.99	Pk	32.4	0	-34.02	60.37	-	-	-	-	164	101	H
			* 2.4835	48.51	RMS	32.2	0	-34	46.71	54	-7.29	-	-	164	101	H
			2.533981	49.73	RMS	32.4	0	-34.01	48.12	-	-	-	-	164	101	H
			* 2.4835	60.4	Pk	32.2	0	-34	58.6	-	-	74	-15.4	205	344	V
			2.548513	61.59	Pk	32.4	0	-34.02	59.97	-	-	-	-	205	344	V
			* 2.4835	48.78	RMS	32.2	0	-34	46.98	54	-7.02	-	-	205	344	V
			2.544812	49.59	RMS	32.4	0	-34.03	47.96	-	-	-	-	205	344	V
			* 2.4835	67.43	Pk	32.2	0	-38.7	60.93	-	-	74	-13.07	355	207	H
			* 2.483539	72.28	Pk	32.2	0	-38.7	65.78	-	-	74	-8.22	355	207	H
HT20	2462	4+3	* 2.4835	50.94	RMS	32.2	0	-38.7	44.44	54	-9.56	-	-	355	207	H
			* 2.483756	51.72	RMS	32.2	0	-38.7	45.22	54	-8.78	-	-	355	207	H
			* 2.4835	73.54	Pk	32.2	0	-38.7	67.04	-	-	74	-6.96	355	207	V
			* 2.484406	75.62	Pk	32.2	0	-38.7	69.12	-	-	74	-4.88	355	207	V
			* 2.4835	55.73	RMS	32.2	0	-38.7	49.23	54	-4.77	-	-	355	207	V
			* 2.483742	57.47	RMS	32.2	0	-38.7	50.97	54	-3.03	-	-	355	207	V
			* 2.4835	74.24	Pk	32.5	0	-40.12	66.62	-	-	74	-7.38	179	142	H
EHT20 (SU Mode)	2462	4+3	* 2.483674	74.4	Pk	32.5	0	-40.11	66.79	-	-	74	-7.21	179	142	H
			* 2.4835	57.37	RMS	32.5	0	-40.12	49.75	54	-4.25	-	-	179	142	H
			* 2.48362	58.46	RMS	32.5	0	-40.11	50.85	54	-3.15	-	-	179	142	H
			* 2.4835	66.52	Pk	32.5	0	-40.12	58.9	-	-	74	-15.1	158	387	V
			* 2.484108	67.94	Pk	32.5	0	-40.11	60.33	-	-	74	-13.67	158	387	V
			* 2.4835	52.26	RMS	32.5	0	-40.12	44.64	54	-9.36	-	-	158	387	V
			* 2.483566	53.52	RMS	32.5	0	-40.11	45.91	54	-8.09	-	-	158	387	V
EHT20 (RU 26 / Index 8)	2462	4+3	* 2.4835	75.71	Pk	32.3	0	-40	68.01	-	-	74	-5.99	76	354	H
			* 2.484379	76.31	Pk	32.3	0	-40	68.61	-	-	74	-5.39	76	354	H
			* 2.4835	50.36	RMS	32.3	0	-40	42.66	54	-11.34	-	-	76	354	H
			* 2.484244	57.53	RMS	32.3	0	-40	49.83	54	-4.17	-	-	76	354	H
			* 2.4835	66.85	Pk	32.3	0	-40	59.15	-	-	74	-14.85	76	354	V
			* 2.484081	67.44	Pk	32.3	0	-40	59.74	-	-	74	-14.26	76	354	V
			* 2.4835	50.76	RMS	32.3	0	-40	43.06	54	-10.94	-	-	76	354	V
			* 2.484108	51.23	RMS	32.3	0	-40	43.53	54	-10.47	-	-	76	354	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

9.1.12. 802.11b/n/be SISO MODE – HIGH BANDEDGE – CHANNEL 12

State A

DTS (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
b-Mode	2467	4	* 2.4835	61.86	Pk	32.5	0	-40.25	54.11	-	-	74	-19.89	156	261	H
			* 2.488175	63.73	Pk	32.5	0	-40.28	55.95	-	-	74	-18.05	156	261	H
			* 2.4835	51.06	RMS	32.5	0	-40.25	43.31	54	-10.69	-	-	156	261	H
			* 2.484298	52.36	RMS	32.5	0	-40.23	44.63	54	-9.37	-	-	156	261	H
			* 2.4835	62.41	Pk	32.5	0	-40.25	54.66	-	-	74	-19.34	236	143	V
			* 2.48423	63.56	Pk	32.5	0	-40.22	55.84	-	-	74	-18.16	236	143	V
		3	* 2.4835	51.31	RMS	32.5	0	-40.25	43.56	54	-10.44	-	-	236	143	V
			* 2.48423	52.15	RMS	32.5	0	-40.22	44.43	54	-9.57	-	-	236	143	V
			* 2.4835	59.5	Pk	32.5	0	-34.17	57.83	-	-	74	-16.17	160	239	H
			2.545313	62.31	Pk	32.6	0	-34.12	60.79	-	-	-	-	160	239	H
			* 2.4835	48.74	RMS	32.5	0	-34.17	47.07	54	-6.93	-	-	160	239	H
			2.541952	50.15	RMS	32.6	0	-34.12	48.63	-	-	-	-	160	239	H
			* 2.4835	59.21	Pk	32.5	0	-34.17	57.54	-	-	74	-16.46	300	321	V
			2.562963	62.04	Pk	32.6	0	-34.05	60.59	-	-	-	-	300	321	V
			* 2.4835	48.59	RMS	32.5	0	-34.17	46.92	54	-7.08	-	-	300	321	V
			2.559615	49.82	RMS	32.6	0	-34.07	48.35	-	-	-	-	300	321	V
HT20	2467	4	* 2.4835	73.52	Pk	32.2	0	-38.7	67.02	-	-	74	-6.98	95	145	H
			* 2.483661	75.79	Pk	32.2	0	-38.7	69.29	-	-	74	-4.71	95	145	H
			* 2.4835	55.26	RMS	32.2	0	-38.7	48.76	54	-5.24	-	-	95	145	H
			* 2.483512	57.28	RMS	32.2	0	-38.7	50.78	54	-3.22	-	-	95	145	H
			* 2.4835	73.87	Pk	32.2	0	-38.7	67.37	-	-	74	-6.63	193	113	V
			* 2.483593	75.69	Pk	32.2	0	-38.7	69.19	-	-	74	-4.81	193	113	V
		3	* 2.4835	55.31	RMS	32.2	0	-38.7	48.81	54	-5.19	-	-	193	113	V
			* 2.483593	56.95	RMS	32.2	0	-38.7	50.45	54	-3.55	-	-	193	113	V
			* 2.4835	75.04	Pk	32.2	0	-38.7	68.54	-	-	74	-5.46	114	160	H
			* 2.483701	76.12	Pk	32.2	0	-38.7	69.62	-	-	74	-4.38	114	160	H
			* 2.4835	56.15	RMS	32.2	0	-38.7	49.65	54	-4.35	-	-	114	160	H
			* 2.483688	57.47	RMS	32.2	0	-38.7	50.97	54	-3.03	-	-	114	160	H
			* 2.4835	71.61	Pk	32.2	0	-38.7	65.11	-	-	74	-8.89	17	347	V
			* 2.483566	74.48	Pk	32.2	0	-38.7	67.98	-	-	74	-6.02	17	347	V
			* 2.4835	53.74	RMS	32.2	0	-38.7	47.24	54	-6.76	-	-	17	347	V
			* 2.483973	54.82	RMS	32.2	0	-38.7	48.32	54	-5.68	-	-	17	347	V
EHT20 (SU Mode)	2467	4	* 2.4835	75.31	Pk	32.3	0	-40	67.61	-	-	74	-6.39	356	191	H
			* 2.48381	76.65	Pk	32.3	0	-40	68.95	-	-	74	-5.05	356	191	H
			* 2.4835	56.98	RMS	32.3	0	-40	49.28	54	-4.72	-	-	356	191	H
			* 2.483851	58.28	RMS	32.3	0	-40	50.58	54	-3.42	-	-	356	191	H
			* 2.4835	76.07	Pk	32.3	0	-40	68.37	-	-	74	-5.63	75	110	V
			* 2.483973	77.18	Pk	32.3	0	-40	69.48	-	-	74	-4.52	75	110	V
		3	* 2.4835	57.83	RMS	32.3	0	-40	50.13	54	-3.87	-	-	75	110	V
			* 2.483607	58.6	RMS	32.3	0	-40	50.9	54	-3.1	-	-	75	110	V
			* 2.4835	71.74	Pk	32.4	0	-37.41	66.73	-	-	74	-7.27	12	238	H
			* 2.483796	73.33	Pk	32.4	0	-37.4	68.33	-	-	74	-5.67	12	238	H
			* 2.4835	55.2	RMS	32.4	0	-37.41	50.19	54	-3.81	-	-	12	238	H
			* 2.48362	56.01	RMS	32.4	0	-37.41	51	54	-3	-	-	12	238	H
			* 2.4835	69.73	Pk	32.4	0	-37.41	64.72	-	-	74	-9.28	308	253	V
			* 2.483566	71.81	Pk	32.4	0	-37.41	66.8	-	-	74	-7.2	308	253	V
			* 2.4835	52.16	RMS	32.4	0	-37.41	47.15	54	-6.85	-	-	308	253	V
			* 2.484772	53.88	RMS	32.4	0	-37.4	48.88	54	-5.12	-	-	308	253	V
EHT20 (RU 26 / Index 8)	2467	4	* 2.4835	77.11	Pk	32.5	0	-40.12	69.49	-	-	74	-4.51	289	245	H
			* 2.483512	77.03	Pk	32.5	0	-40.11	69.42	-	-	74	-4.58	289	245	H
			* 2.4835	55.93	RMS	32.5	0	-40.12	48.31	54	-5.69	-	-	289	245	H
			* 2.484067	55.96	RMS	32.5	0	-40.11	48.35	54	-5.65	-	-	289	245	H
			* 2.4835	75.97	Pk	32.5	0	-40.12	68.35	-	-	74	-5.65	24	109	V
			* 2.483525	76.38	Pk	32.5	0	-40.11	68.77	-	-	74	-5.23	24	109	V
		3	* 2.4835	54.26	RMS	32.5	0	-40.12	46.64	54	-7.36	-	-	24	109	V
			* 2.483647	54.92	RMS	32.5	0	-40.11	47.31	54	-6.69	-	-	24	109	V
			* 2.4835	71.03	Pk	32.1	0	-34.5	68.63	-	-	74	-5.37	188	155	H
			* 2.483688	71.17	Pk	32.1	0	-34.5	68.77	-	-	74	-5.23	188	155	H
			* 2.4835	48.62	RMS	32.1	0	-34.5	46.22	54	-7.78	-	-	188	155	H
			* 2.484596	50.79	RMS	32.1	0	-34.5	48.39	54	-5.61	-	-	188	155	H
			* 2.4835	69.24	Pk	32.1	0	-34.5	66.84	-	-	74	-7.16	109	310	V
			* 2.483512	69.69	Pk	32.1	0	-34.5	67.29	-	-	74	-6.71	109	310	V
			* 2.4835	49.58	RMS	32.1	0	-34.5	47.18	54	-6.82	-	-	109	310	V
			* 2.484433	50.12	RMS	32.1	0	-34.5	47.72	54	-6.28	-	-	109	310	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

State B

DTS (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
b-Mode	2467	4	* 2.4835	54.22	Pk	32.1	0	-34.5	51.82	-	-	74	-22.18	148	129	H
			2.539665	56.11	Pk	31.9	0	-34.3	53.71	-	-	-	-	148	129	H
			* 2.4835	43.51	RMS	32.1	0	-34.5	41.11	54	-12.89	-	-	148	129	H
			* 2.483751	44.33	RMS	32.1	0	-34.5	41.93	54	-12.07	-	-	148	129	H
			* 2.4835	54.42	Pk	32.1	0	-34.5	52.02	-	-	74	-21.98	119	366	V
			* 2.497036	55.91	Pk	32.1	0	-34.4	53.61	-	-	74	-20.39	119	366	V
		3	* 2.4835	43.34	RMS	32.1	0	-34.5	40.94	54	-13.06	-	-	119	366	V
			2.52118	43.79	RMS	32.1	0	-34.3	41.59	-	-	-	-	119	366	V
			* 2.4835	59.37	Pk	32.2	0	-34	57.57	-	-	74	-16.43	255	314	H
			2.534482	62.21	Pk	32.4	0	-34.02	60.59	-	-	-	-	255	314	H
			* 2.4835	48.58	RMS	32.2	0	-34	46.78	54	-7.22	-	-	255	314	H
			* 2.492309	49.75	RMS	32.3	0	-34	48.05	54	-5.95	-	-	255	314	H
			* 2.4835	59.27	Pk	32.2	0	-34	57.47	-	-	74	-16.53	151	377	V
			* 2.487429	61.68	Pk	32.3	0	-33.98	60	-	-	74	-14	151	377	V
			* 2.4835	48	RMS	32.2	0	-34	46.2	54	-7.8	-	-	151	377	V
			2.508062	49.61	RMS	32.4	0	-34.03	47.98	-	-	-	-	151	377	V
HT20	2467	4	* 2.4835	77.24	Pk	29	0	-40.1	66.14	-	-	74	-7.86	144	122	H
			* 2.48484	80.03	Pk	29	0	-40.1	68.93	-	-	74	-5.07	144	122	H
			* 2.4835	58.86	RMS	29	0	-40.1	47.76	54	-6.24	-	-	144	122	H
			* 2.483674	61.24	RMS	29	0	-40.1	50.14	54	-3.86	-	-	144	122	H
			* 2.4835	74.94	Pk	29	0	-40.1	63.84	-	-	74	-10.16	110	368	V
			* 2.484745	76.67	Pk	29	0	-40.1	65.57	-	-	74	-8.43	110	368	V
		3	* 2.4835	55.83	RMS	29	0	-40.1	44.73	54	-9.27	-	-	110	368	V
			* 2.484	57.79	RMS	29	0	-40.1	46.69	54	-7.31	-	-	110	368	V
			* 2.4835	68.91	Pk	32.1	0	-34.5	66.51	-	-	74	-7.49	260	367	H
			* 2.483507	69.09	Pk	32.1	0	-34.5	66.69	-	-	74	-7.31	260	367	H
			* 2.4835	53.02	RMS	32.1	0	-34.5	50.62	54	-3.38	-	-	260	367	H
			* 2.483599	53.02	RMS	32.1	0	-34.5	50.62	54	-3.38	-	-	260	367	H
EHT20 (SU Mode)	2467	4	* 2.4835	66.72	Pk	32.1	0	-34.5	64.32	-	-	74	-9.68	341	371	V
			* 2.483553	68.83	Pk	32.1	0	-34.5	66.43	-	-	74	-7.57	341	371	V
			* 2.4835	52.4	RMS	32.1	0	-34.5	50	54	-4	-	-	341	371	V
			* 2.483721	53.11	RMS	32.1	0	-34.5	50.71	54	-3.29	-	-	341	371	V
		3	* 2.4835	72.18	Pk	32.4	0	-37.41	67.17	-	-	74	-6.83	225	171	H
			* 2.484013	74.3	Pk	32.4	0	-37.4	69.3	-	-	74	-4.7	225	171	H
			* 2.4835	55.77	RMS	32.4	0	-37.41	50.76	54	-3.24	-	-	225	171	H
			* 2.483593	56.42	RMS	32.4	0	-37.41	51.41	54	-2.59	-	-	225	171	H
			* 2.4835	66.59	Pk	32.4	0	-37.41	61.58	-	-	74	-12.42	49	330	V
			* 2.483932	68.51	Pk	32.4	0	-37.4	63.51	-	-	74	-10.49	49	330	V
			* 2.4835	51.25	RMS	32.4	0	-37.41	46.24	54	-7.76	-	-	49	330	V
			* 2.48423	52.29	RMS	32.4	0	-37.4	47.29	54	-6.71	-	-	49	330	V
			* 2.4835	71.7	Pk	32.4	0	-37.41	66.69	-	-	74	-7.31	229	226	H
			* 2.483769	73.63	Pk	32.4	0	-37.4	68.63	-	-	74	-5.37	229	226	H
			* 2.4835	54.36	RMS	32.4	0	-37.41	49.35	54	-4.65	-	-	229	226	H
			* 2.483878	55	RMS	32.4	0	-37.4	50	54	-4	-	-	229	226	H
			* 2.4835	66.57	Pk	32.4	0	-37.41	61.56	-	-	74	-12.44	81	339	V
			* 2.483552	68.94	Pk	32.4	0	-37.41	63.93	-	-	74	-10.07	81	339	V
			* 2.4835	52.26	RMS	32.4	0	-37.41	47.25	54	-6.75	-	-	81	339	V
			* 2.483661	52.27	RMS	32.4	0	-37.41	47.26	54	-6.74	-	-	81	339	V
EHT20 (RU 26 / Index 8)	2467	4	* 2.4835	74.03	Pk	32.4	0	-38.32	68.11	-	-	74	-5.89	87	205	H
			* 2.483539	74.34	Pk	32.4	0	-38.32	68.42	-	-	74	-5.58	87	205	H
			* 2.4835	51.15	RMS	32.4	0	-38.32	45.23	54	-8.77	-	-	87	205	H
			* 2.484461	52.58	RMS	32.4	0	-38.31	46.67	54	-7.33	-	-	87	205	H
			* 2.4835	67.93	Pk	32.4	0	-38.32	62.01	-	-	74	-11.99	341	387	V
			* 2.483552	69.37	Pk	32.4	0	-38.32	63.45	-	-	74	-10.55	341	387	V
		3	* 2.4835	50.17	RMS	32.4	0	-38.32	44.25	54	-9.75	-	-	341	387	V
			* 2.484067	51.31	RMS	32.4	0	-38.32	45.39	54	-8.61	-	-	341	387	V
			* 2.4835	74.93	Pk	32.2	0	-38.7	68.43	-	-	74	-5.57	84	153	H
			* 2.483525	75.55	Pk	32.2	0	-38.7	69.05	-	-	74	-4.95	84	153	H
			* 2.4835	49.78	RMS	32.2	0	-38.7	43.28	54	-10.72	-	-	84	153	H
			* 2.484013	52.32	RMS	32.2	0	-38.7	45.82	54	-8.18	-	-	84	153	H
			* 2.4835	70.44	Pk	32.2	0	-38.7	63.94	-	-	74	-10.06	339	365	V
			* 2.483512	71.06	Pk	32.2	0	-38.7	64.56	-	-	74	-9.44	339	365	V
			* 2.4835	50.18	RMS	32.2	0	-38.7	43.68	54	-10.32	-	-	339	365	V
			* 2.485437	50.79	RMS	32.2	0	-38.7	44.29	54	-9.71	-	-	339	365	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

9.1.13. 802.11b/n/be MIMO CDD MODE – HIGH BANDEDGE – CHANNEL 12

State A

DTS (MIMO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
b-Mode	2467	4+3	*2.4835	60.48	Pk	32.5	0	-34.17	58.81	-	-	74	-15.19	341	122	H
			2.559927	62.14	Pk	32.6	0	-34.07	60.67	-	-	-	-	341	122	H
			*2.4835	49.07	RMS	32.5	0	-34.17	47.4	54	-6.6	-	-	341	122	H
			2.559113	49.81	RMS	32.6	0	-34.07	48.34	-	-	-	-	341	122	H
			*2.4835	59.61	Pk	32.5	0	-34.17	57.94	-	-	74	-16.06	206	152	V
			2.534076	62.03	Pk	32.6	0	-34.13	60.5	-	-	-	-	206	152	V
			*2.4835	48.73	RMS	32.5	0	-34.17	47.06	54	-6.94	-	-	206	152	V
			2.550587	49.66	RMS	32.6	0	-34.07	48.19	-	-	-	-	206	152	V
HT20	2467	4+3	*2.4835	67.18	Pk	32.5	0	-34.17	65.51	-	-	74	-8.49	120	156	H
			*2.483688	68.65	Pk	32.5	0	-34.17	66.98	-	-	74	-7.02	120	156	H
			*2.4835	52.04	RMS	32.5	0	-34.17	50.37	54	-3.63	-	-	120	156	H
			*2.484027	52.7	RMS	32.5	0	-34.17	51.03	54	-2.97	-	-	120	156	H
			*2.4835	60.86	Pk	32.5	0	-34.17	59.19	-	-	74	-14.81	305	132	V
			*2.483823	63.26	Pk	32.5	0	-34.17	61.59	-	-	74	-12.41	305	132	V
			*2.4835	49.26	RMS	32.5	0	-34.17	47.59	54	-6.41	-	-	305	132	V
EHT20 (SU Mode)	2467	4+3	*2.483796	50.23	RMS	32.5	0	-34.17	48.56	54	-5.44	-	-	305	132	V
			*2.4835	69.8	Pk	32.3	0	-40	62.1	-	-	74	-11.9	209	112	H
			*2.486589	77	Pk	32.3	0	-40.04	69.26	-	-	74	-4.74	209	112	H
			*2.4835	55.49	RMS	32.3	0	-40	47.79	54	-6.21	-	-	209	112	H
			*2.486019	59.01	RMS	32.3	0	-40.1	51.21	54	-2.79	-	-	209	112	H
			*2.4835	73.27	Pk	32.3	0	-40	65.57	-	-	74	-8.43	346	371	V
			*2.483593	76.55	Pk	32.3	0	-40	68.85	-	-	74	-5.15	346	371	V
EHT20 (RU 26 / Index8)	2467	4+3	*2.4835	55.72	RMS	32.3	0	-40	48.02	54	-5.98	-	-	346	371	V
			*2.483823	57	RMS	32.3	0	-40	49.3	54	-4.7	-	-	346	371	V
			*2.4835	73.55	Pk	32.4	0	-37.41	68.54	-	-	74	-5.46	264	211	H
			*2.483539	74.16	Pk	32.4	0	-37.41	69.15	-	-	74	-4.85	264	211	H
			*2.4835	51.03	RMS	32.4	0	-37.41	46.02	54	-7.98	-	-	264	211	H
			*2.484217	53.31	RMS	32.4	0	-37.4	48.31	54	-5.69	-	-	264	211	H
			*2.4835	68.17	Pk	32.4	0	-37.41	63.16	-	-	74	-10.84	64	376	V
			*2.483539	69.82	Pk	32.4	0	-37.41	64.81	-	-	74	-9.19	64	376	V
			*2.4835	50.19	RMS	32.4	0	-37.41	45.18	54	-8.82	-	-	64	376	V
			*2.485193	50.65	RMS	32.4	0	-37.4	45.65	54	-8.35	-	-	64	376	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

State B

DTS (MIMO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
b-Mode	2467	4+3	* 2.4835	59.31	Pk	32.2	0	-34	57.51	-	-	74	-16.49	325	134	H
			2.560659	62.32	Pk	32.4	0	-34.03	60.69	-	-	-	-	325	134	H
			* 2.4835	49.14	RMS	32.2	0	-34	47.34	54	-6.66	-	-	325	134	H
			2.541423	49.69	RMS	32.4	0	-34.04	48.05	-	-	-	-	325	134	H
			* 2.4835	60.11	Pk	32.2	0	-34	58.31	-	-	74	-15.69	91	378	V
			2.532489	62.07	Pk	32.4	0	-34.03	60.44	-	-	-	-	91	378	V
			* 2.4835	48.71	RMS	32.2	0	-34	46.91	54	-7.09	-	-	91	378	V
			2.549014	49.68	RMS	32.4	0	-34.02	48.06	-	-	-	-	91	378	V
			* 2.4835	68.4	Pk	32.1	0	-34.5	66	-	-	74	-8	147	164	H
HT20	2467	4+3	* 2.483837	70.94	Pk	32.1	0	-34.5	68.54	-	-	74	-5.46	147	164	H
			* 2.4835	52.09	RMS	32.1	0	-34.5	49.69	54	-4.31	-	-	147	164	H
			* 2.483742	53.18	RMS	32.1	0	-34.5	50.78	54	-3.22	-	-	147	164	H
			* 2.4835	60.33	Pk	32.1	0	-34.5	57.93	-	-	74	-16.07	110	368	V
			* 2.485084	66.18	Pk	32.1	0	-34.5	63.78	-	-	74	-10.22	110	368	V
			* 2.4835	49.5	RMS	32.1	0	-34.5	47.1	54	-6.9	-	-	110	368	V
			* 2.485965	50.65	RMS	32.2	0	-34.5	48.35	54	-5.65	-	-	110	368	V
			* 2.4835	72.5	Pk	32.5	0	-40.12	64.88	-	-	74	-9.12	180	113	H
			* 2.483701	73.8	Pk	32.5	0	-40.11	66.19	-	-	74	-7.81	180	113	H
EHT20 (SU Mode)	2467	4+3	* 2.4835	57.71	RMS	32.5	0	-40.12	50.09	54	-3.91	-	-	180	113	H
			* 2.483512	58.22	RMS	32.5	0	-40.11	50.61	54	-3.39	-	-	180	113	H
			* 2.4835	68.39	Pk	32.5	0	-40.12	60.77	-	-	74	-13.23	6	334	V
			* 2.48442	70.04	Pk	32.5	0	-40.1	62.44	-	-	74	-11.56	6	334	V
			* 2.4835	53.93	RMS	32.5	0	-40.12	46.31	54	-7.69	-	-	6	334	V
			* 2.484067	54.35	RMS	32.5	0	-40.11	46.74	54	-7.26	-	-	6	334	V
			* 2.4835	75.97	Pk	32.3	0	-40	68.27	-	-	74	-5.73	79	112	H
			* 2.483512	76.47	Pk	32.3	0	-40	68.77	-	-	74	-5.23	79	112	H
			* 2.4835	55.3	RMS	32.3	0	-40	47.6	54	-6.4	-	-	79	112	H
EHT20 (RU 26 / Index8)	2467	4+3	* 2.483512	55.09	RMS	32.3	0	-40	47.39	54	-6.61	-	-	79	112	H
			* 2.4835	67.06	Pk	32.3	0	-40	59.36	-	-	74	-14.64	278	115	V
			* 2.48362	69.01	Pk	32.3	0	-40	61.31	-	-	74	-12.69	278	115	V
			* 2.4835	50.53	RMS	32.3	0	-40	42.83	54	-11.17	-	-	278	115	V
			2.511193	51.07	RMS	32.4	0	-39.9	43.57	-	-	-	-	278	115	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

9.1.14. 802.11b/n/be SISO MODE – HIGH BANDEDGE – CHANNEL 13

State A

DTS (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
b-Mode	2472	4	* 2.4835	61.77	Pk	32.5	0	-40.25	54.02	-	-	74	-19.98	159	140	H
			2.517415	63.73	Pk	32.5	0	-40.1	56.13	-	-	-	-	159	140	H
			* 2.4835	51.25	RMS	32.5	0	-40.25	43.5	54	-10.5	-	-	159	140	H
			* 2.487551	51.83	RMS	32.5	0	-40.26	44.07	54	-9.93	-	-	159	140	H
			* 2.4835	61.74	Pk	32.5	0	-40.25	53.99	-	-	74	-20.01	236	148	V
			2.548852	63.29	Pk	32.5	0	-39.8	55.99	-	-	-	-	236	148	V
			* 2.4835	50.75	RMS	32.5	0	-40.25	43	54	-11	-	-	236	148	V
			* 2.498518	51.68	RMS	32.5	0	-40.1	44.08	54	-9.92	-	-	236	148	V
		3	* 2.4835	60.16	Pk	32.5	0	-34.17	58.49	-	-	74	-15.51	246	269	H
			* 2.484298	61.95	Pk	32.5	0	-34.16	60.29	-	-	74	-13.71	246	269	H
			* 2.4835	48.72	RMS	32.5	0	-34.17	47.05	54	-6.95	-	-	246	269	H
			* 2.486589	50.75	RMS	32.5	0	-34.16	49.09	54	-4.91	-	-	246	269	H
			* 2.4835	59.63	Pk	32.5	0	-34.17	57.96	-	-	74	-16.04	208	385	V
			2.55544	61.94	Pk	32.6	0	-34.09	60.45	-	-	-	-	208	385	V
			* 2.4835	48.44	RMS	32.5	0	-34.17	46.77	54	-7.23	-	-	208	385	V
			2.550261	49.89	RMS	32.6	0	-34.08	48.41	-	-	-	-	208	385	V
HT20	2472	4	* 2.4835	75.07	Pk	34	0	-40.09	68.98	-	-	74	-5.02	280	201	H
			* 2.48362	74.6	Pk	34	0	-40.09	68.51	-	-	74	-5.49	280	201	H
			* 2.4835	53.75	RMS	34	0	-40.09	47.66	54	-6.34	-	-	280	201	H
			* 2.483701	55.24	RMS	34	0	-40.09	49.15	54	-4.85	-	-	280	201	H
			* 2.4835	72.11	Pk	34	0	-40.09	66.02	-	-	74	-7.98	234	238	V
			* 2.483715	75.54	Pk	34	0	-40.09	69.45	-	-	74	-4.55	234	238	V
			* 2.4835	56.23	RMS	34	0	-40.09	50.14	54	-3.86	-	-	234	238	V
			* 2.483634	57.04	RMS	34	0	-40.09	50.95	54	-3.05	-	-	234	238	V
		3	* 2.4835	70.08	Pk	32.4	0	-37.41	65.07	-	-	74	-8.93	235	191	H
			* 2.483837	73.79	Pk	32.4	0	-37.4	68.79	-	-	74	-5.21	235	191	H
			* 2.4835	53.11	RMS	32.4	0	-37.41	48.1	54	-5.9	-	-	235	191	H
			* 2.483539	52.82	RMS	32.4	0	-37.41	47.81	54	-6.19	-	-	235	191	H
			* 2.4835	65.38	Pk	32.4	0	-37.41	60.37	-	-	74	-13.63	201	256	V
			* 2.483512	68.11	Pk	32.4	0	-37.41	63.1	-	-	74	-10.9	201	256	V
			* 2.4835	50.53	RMS	32.4	0	-37.41	45.52	54	-8.48	-	-	201	256	V
			* 2.483715	50.69	RMS	32.4	0	-37.41	45.68	54	-8.32	-	-	201	256	V
EHT20 (SU Mode)	2472	4	* 2.4835	73.78	Pk	32.4	0	-37.41	68.77	-	-	74	-5.23	343	219	H
			* 2.483552	74.23	Pk	32.4	0	-37.41	69.22	-	-	74	-4.78	343	219	H
			* 2.4835	51.82	RMS	32.4	0	-37.41	46.81	54	-7.19	-	-	343	219	H
			* 2.483512	54.27	RMS	32.4	0	-37.41	49.26	54	-4.74	-	-	343	219	H
			* 2.4835	71.09	Pk	32.4	0	-37.41	66.08	-	-	74	-7.92	105	135	V
			* 2.483552	73	Pk	32.4	0	-37.41	67.99	-	-	74	-6.01	105	135	V
			* 2.4835	51.63	RMS	32.4	0	-37.41	46.62	54	-7.38	-	-	105	135	V
			* 2.483593	53.77	RMS	32.4	0	-37.41	48.76	54	-5.24	-	-	105	135	V
		3	* 2.4835	75.08	Pk	32.3	0	-40	67.38	-	-	74	-6.62	358	338	H
			* 2.483512	77.01	Pk	32.3	0	-40	69.31	-	-	74	-4.69	358	338	H
			* 2.4835	53.83	RMS	32.3	0	-40	46.13	54	-7.87	-	-	358	338	H
			* 2.483512	54.79	RMS	32.3	0	-40	47.09	54	-6.91	-	-	358	338	H
			* 2.4835	71.82	Pk	32.3	0	-40	64.12	-	-	74	-9.88	285	365	V
			* 2.483539	74.79	Pk	32.3	0	-40	67.09	-	-	74	-6.91	285	365	V
			* 2.4835	52.83	RMS	32.3	0	-40	45.13	54	-8.87	-	-	285	365	V
			* 2.483539	53.62	RMS	32.3	0	-40	45.92	54	-8.08	-	-	285	365	V
EHT20 (RU 26 / Index 8)	2472	4	* 2.4835	55.38	Pk	32.3	0	-19.9	67.78	-	-	74	-6.22	66	331	H
			* 2.483584	55.99	Pk	32.3	0	-19.9	68.39	-	-	74	-5.61	66	331	H
			* 2.4835	34.25	RMS	32.3	0	-19.9	46.65	54	-7.35	-	-	66	331	H
			* 2.483538	36.09	RMS	32.3	0	-19.9	48.49	54	-5.51	-	-	66	331	H
			* 2.4835	52.67	Pk	32.3	0	-19.9	65.07	-	-	74	-8.93	306	260	V
			* 2.483507	52.85	Pk	32.3	0	-19.9	65.25	-	-	74	-8.75	306	260	V
			* 2.4835	32.18	RMS	32.3	0	-19.9	44.58	54	-9.42	-	-	306	260	V
			* 2.483553	34.07	RMS	32.3	0	-19.9	46.47	54	-7.53	-	-	306	260	V
		3	* 2.4835	69.86	Pk	32.1	0	-34.5	67.46	-	-	74	-6.54	174	176	H
			* 2.483552	71.24	Pk	32.1	0	-34.5	68.84	-	-	74	-5.16	174	176	H
			* 2.4835	50.38	RMS	32.1	0	-34.5	47.98	54	-6.02	-	-	174	176	H
			* 2.483647	51.03	RMS	32.1	0	-34.5	48.63	54	-5.37	-	-	174	176	H
			* 2.4835	69.61	Pk	32.1	0	-34.5	67.21	-	-	74	-6.79	108	308	V
			* 2.483566	68.79	Pk	32.1	0	-34.5	66.39	-	-	74	-7.61	108	308	V
			* 2.4835	49.51	RMS	32.1	0	-34.5	47.11	54	-6.89	-	-	108	308	V
			* 2.483593	50.96	RMS	32.1	0	-34.5	48.56	54	-5.44	-	-	108	308	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

State B

DTS (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
b-Mode	2472	4	* 2.4835	54.38	Pk	32.1	0	-34.5	51.98	-	-	74	-22.02	289	255	H
			* 2.486603	56.78	Pk	32.1	0	-34.4	54.48	-	-	74	-19.52	289	255	H
			* 2.4835	44.05	RMS	32.1	0	-34.5	41.65	54	-12.35	-	-	289	255	H
			* 2.486131	45.51	RMS	32.1	0	-34.4	43.21	54	-10.79	-	-	289	255	H
			* 2.4835	54.86	Pk	32.1	0	-34.5	52.46	-	-	74	-21.54	43	375	V
			* 2.485261	56.04	Pk	32.1	0	-34.4	53.74	-	-	74	-20.26	43	375	V
			* 2.4835	44.02	RMS	32.1	0	-34.5	41.62	54	-12.38	-	-	43	375	V
			* 2.485856	45.37	RMS	32.1	0	-34.4	43.07	54	-10.93	-	-	43	375	V
			* 2.4835	59.03	Pk	32.2	0	-34	57.23	-	-	74	-16.77	56	181	H
			* 2.487429	61.87	Pk	32.3	0	-33.98	60.19	-	-	74	-13.81	56	181	H
		3	* 2.4835	48.26	RMS	32.2	0	-34	46.46	54	-7.54	-	-	56	181	H
			* 2.48686	50.03	RMS	32.3	0	-33.98	48.35	54	-5.65	-	-	56	181	H
			* 2.4835	59.65	Pk	32.2	0	-34	57.85	-	-	74	-16.15	325	269	V
			* 2.487009	61.89	Pk	32.3	0	-33.98	60.21	-	-	74	-13.79	325	269	V
			* 2.4835	47.89	RMS	32.2	0	-34	46.09	54	-7.91	-	-	325	269	V
			* 2.525318	49.63	RMS	32.4	0	-34.04	47.99	-	-	-	-	325	269	V
HT20	2472	4	* 2.4835	77.14	Pk	29	0	-40.1	66.04	-	-	74	-7.96	142	156	H
			* 2.484108	80.58	Pk	29	0	-40.1	69.48	-	-	74	-4.52	142	156	H
			* 2.4835	56.98	RMS	29	0	-40.1	45.88	54	-8.12	-	-	142	156	H
			* 2.483512	57.84	RMS	29	0	-40.1	46.74	54	-7.26	-	-	142	156	H
			* 2.4835	71.52	Pk	29	0	-40.1	60.42	-	-	74	-13.58	112	365	V
			* 2.483579	76.11	Pk	29	0	-40.1	65.01	-	-	74	-8.99	112	365	V
			* 2.4835	54.27	RMS	29	0	-40.1	43.17	54	-10.83	-	-	112	365	V
			* 2.483552	54.56	RMS	29	0	-40.1	43.46	54	-10.54	-	-	112	365	V
		3	* 2.4835	69.11	Pk	32.1	0	-34.5	66.71	-	-	74	-7.29	255	368	H
			* 2.483751	70.82	Pk	32.1	0	-34.5	68.42	-	-	74	-5.58	255	368	H
			* 2.4835	52.36	RMS	32.1	0	-34.5	49.96	54	-4.04	-	-	255	368	H
			* 2.483797	53.52	RMS	32.1	0	-34.5	51.12	54	-2.88	-	-	255	368	H
			* 2.4835	67.33	Pk	32.1	0	-34.5	64.93	-	-	74	-9.07	341	371	V
			* 2.483995	68.21	Pk	32.1	0	-34.5	65.81	-	-	74	-8.19	341	371	V
			* 2.4835	51.25	RMS	32.1	0	-34.5	48.85	54	-5.15	-	-	341	371	V
			* 2.48366	52.45	RMS	32.1	0	-34.5	50.05	54	-3.95	-	-	341	371	V
EHT20 (SU Mode)	2472	4	* 2.4835	73.95	Pk	32.4	0	-37.41	68.94	-	-	74	-5.06	231	145	H
			* 2.483512	74.54	Pk	32.4	0	-37.41	69.53	-	-	74	-4.47	231	145	H
			* 2.4835	53.04	RMS	32.4	0	-37.41	48.03	54	-5.97	-	-	231	145	H
			* 2.483607	54.26	RMS	32.4	0	-37.41	49.25	54	-4.75	-	-	231	145	H
			* 2.4835	70.96	Pk	32.4	0	-37.41	65.95	-	-	74	-8.05	216	370	V
			* 2.483512	71.52	Pk	32.4	0	-37.41	66.51	-	-	74	-7.49	216	370	V
			* 2.4835	51.85	RMS	32.4	0	-37.41	46.84	54	-7.16	-	-	216	370	V
			* 2.483525	52.73	RMS	32.4	0	-37.41	47.72	54	-6.28	-	-	216	370	V
		3	* 2.4835	73.74	Pk	32.4	0	-37.41	68.73	-	-	74	-5.27	261	228	H
			* 2.483593	73.34	Pk	32.4	0	-37.41	68.33	-	-	74	-5.67	261	228	H
			* 2.4835	52.94	RMS	32.4	0	-37.41	47.93	54	-6.07	-	-	261	228	H
			* 2.483552	53.37	RMS	32.4	0	-37.41	48.36	54	-5.64	-	-	261	228	H
			* 2.4835	68.6	Pk	32.4	0	-37.41	63.59	-	-	74	-10.41	82	367	V
			* 2.483552	70.08	Pk	32.4	0	-37.41	65.07	-	-	74	-8.93	82	367	V
			* 2.4835	51.12	RMS	32.4	0	-37.41	46.11	54	-7.89	-	-	82	367	V
			* 2.483566	51.49	RMS	32.4	0	-37.41	46.48	54	-7.52	-	-	82	367	V
EHT20 (RU 26 / Index 8)	2472	4	* 2.4835	73.24	Pk	32.4	0	-38.32	67.32	-	-	74	-6.68	354	102	H
			* 2.483512	75.16	Pk	32.4	0	-38.32	69.24	-	-	74	-4.76	354	102	H
			* 2.4835	52.1	RMS	32.4	0	-38.32	46.18	54	-7.82	-	-	354	102	H
			* 2.483525	53.33	RMS	32.4	0	-38.32	47.41	54	-6.59	-	-	354	102	H
			* 2.4835	72.52	Pk	32.4	0	-38.32	66.6	-	-	74	-7.4	71	378	V
			* 2.483525	72.89	Pk	32.4	0	-38.32	66.97	-	-	74	-7.03	71	378	V
			* 2.4835	51.42	RMS	32.4	0	-38.32	45.5	54	-8.5	-	-	71	378	V
			* 2.483593	52.63	RMS	32.4	0	-38.32	46.71	54	-7.29	-	-	71	378	V
		3	* 2.4835	74.43	Pk	32.2	0	-38.7	67.93	-	-	74	-6.07	83	116	H
			* 2.483552	75.05	Pk	32.2	0	-38.7	68.55	-	-	74	-5.45	83	116	H
			* 2.4835	52.39	RMS	32.2	0	-38.7	45.89	54	-8.11	-	-	83	116	H
			* 2.483647	53.69	RMS	32.2	0	-38.7	47.19	54	-6.81	-	-	83	116	H
			* 2.4835	73.27	Pk	32.2	0	-38.7	66.77	-	-	74	-7.23	346	364	V
			* 2.483525	72.87	Pk	32.2	0	-38.7	66.37	-	-	74	-7.63	346	364	V
			* 2.4835	53.22	RMS	32.2	0	-38.7	46.72	54	-7.28	-	-	346	364	V
			* 2.483525	53.22	RMS	32.2	0	-38.7	46.72	54	-7.28	-	-	346	364	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

9.1.15. 802.11b/n/be MIMO CDD MODE – HIGH BANDEDGE – CHANNEL 13

State A

DTS (MIMO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
b-Mode	2472	4+3	*2.4835	60.26	Pk	32.5	0	-34.17	58.59	-	-	74	-15.41	343	121	H
			*2.485138	62.08	Pk	32.5	0	-34.15	60.43	-	-	74	-13.57	343	121	H
			*2.4835	49.75	RMS	32.5	0	-34.17	48.08	54	-5.92	-	-	343	121	H
			*2.485694	50.08	RMS	32.5	0	-34.16	48.42	54	-5.58	-	-	343	121	H
			*2.4835	59.53	Pk	32.5	0	-34.17	57.86	-	-	74	-16.14	205	280	V
			2.554979	62.15	Pk	32.6	0	-34.09	60.66	-	-	-	-	205	280	V
			*2.4835	48.45	RMS	32.5	0	-34.17	46.78	54	-7.22	-	-	205	280	V
			2.535594	49.9	RMS	32.6	0	-34.12	48.38	-	-	-	-	205	280	V
HT20	2472	4+3	*2.4835	64.8	Pk	32.5	0	-34.17	63.13	-	-	74	-10.87	124	140	H
			*2.48362	68.11	Pk	32.5	0	-34.17	66.44	-	-	74	-7.56	124	140	H
			*2.4835	52.71	RMS	32.5	0	-34.17	51.04	54	-2.96	-	-	124	140	H
			*2.483579	53.01	RMS	32.5	0	-34.17	51.34	54	-2.66	-	-	124	140	H
			*2.4835	60.38	Pk	32.5	0	-34.17	58.71	-	-	74	-15.29	302	110	V
			*2.484854	62.71	Pk	32.5	0	-34.15	61.06	-	-	74	-12.94	302	110	V
			*2.4835	49.33	RMS	32.5	0	-34.17	47.66	54	-6.34	-	-	302	110	V
			*2.483512	50.25	RMS	32.5	0	-34.17	48.58	54	-5.42	-	-	302	110	V
EHT20 (SU Mode)	2472	4+3	*2.4835	69.1	Pk	32.4	0	-37.41	64.09	-	-	74	-9.91	256	119	H
			*2.483634	74.07	Pk	32.4	0	-37.41	69.06	-	-	74	-4.94	256	119	H
			*2.4835	54.07	RMS	32.4	0	-37.41	49.06	54	-4.94	-	-	256	119	H
			*2.483905	53.97	RMS	32.4	0	-37.4	48.97	54	-5.03	-	-	256	119	H
			*2.4835	61.96	Pk	32.4	0	-37.41	56.95	-	-	74	-17.05	15	167	V
			2.555521	62.51	Pk	32.5	0	-37.22	57.79	-	-	-	-	15	167	V
			*2.4835	49.81	RMS	32.4	0	-37.41	44.8	54	-9.2	-	-	15	167	V
			2.544541	50.37	RMS	32.5	0	-37.24	45.63	-	-	-	-	15	167	V
EHT20 (RU 26 / Index 8)	2472	4+3	*2.4835	76.46	Pk	32.3	0	-40	68.76	-	-	74	-5.24	216	129	H
			*2.483525	76.88	Pk	32.3	0	-40	69.18	-	-	74	-4.82	216	129	H
			*2.4835	55.51	RMS	32.3	0	-40	47.81	54	-6.19	-	-	216	129	H
			*2.483539	56.4	RMS	32.3	0	-40	48.7	54	-5.3	-	-	216	129	H
			*2.4835	71.05	Pk	32.3	0	-40	63.35	-	-	74	-10.65	43	359	V
			*2.483566	72.44	Pk	32.3	0	-40	64.74	-	-	74	-9.26	43	359	V
			*2.4835	51.81	RMS	32.3	0	-40	44.11	54	-9.89	-	-	43	359	V
			*2.483715	52.26	RMS	32.3	0	-40	44.56	54	-9.44	-	-	43	359	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

State B

DTS (MIMO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
b-Mode	2472	4+3	* 2.4835	59.04	Pk	32.2	0	-34	57.24	-	-	74	-16.76	32	178	H
			* 2.48545	61.76	Pk	32.3	0	-33.98	60.08	-	-	74	-13.92	32	178	H
			* 2.4835	48.62	RMS	32.2	0	-34	46.82	54	-7.18	-	-	32	178	H
			* 2.484908	50.68	RMS	32.3	0	-33.98	49	54	-5	-	-	32	178	H
			* 2.4835	60.04	Pk	32.2	0	-34	58.24	-	-	74	-15.76	199	382	V
			* 2.485043	61.97	Pk	32.3	0	-33.98	60.29	-	-	74	-13.71	199	382	V
			* 2.4835	48.9	RMS	32.2	0	-34	47.1	54	-6.9	-	-	199	382	V
HT20	2472	4+3	* 2.484447	49.89	RMS	32.2	0	-33.99	48.1	54	-5.9	-	-	199	382	V
			* 2.4835	70.3	Pk	32.4	0	-36.91	65.79	-	-	74	-8.21	116	217	H
			* 2.48583	72.44	Pk	32.4	0	-36.92	67.92	-	-	74	-6.08	116	217	H
			* 2.4835	51.65	RMS	32.4	0	-36.91	47.14	54	-6.86	-	-	116	217	H
			* 2.48526	53.08	RMS	32.4	0	-36.93	48.55	54	-5.45	-	-	116	217	H
			* 2.4835	70.22	Pk	32.4	0	-36.91	65.71	-	-	74	-8.29	343	392	V
			* 2.483539	73.47	Pk	32.4	0	-36.9	68.97	-	-	74	-5.03	343	392	V
EHT20 (SU Mode)	2472	4+3	* 2.4835	52.79	RMS	32.4	0	-36.91	48.28	54	-5.72	-	-	343	392	V
			* 2.483539	53.32	RMS	32.4	0	-36.9	48.82	54	-5.18	-	-	343	392	V
			*2.4835	76.66	Pk	32.5	0	-40.12	69.04	-	-	74	-4.96	163	140	H
			*2.483512	76.68	Pk	32.5	0	-40.11	69.07	-	-	74	-4.93	163	140	H
			*2.4835	53.41	RMS	32.5	0	-40.12	45.79	54	-8.21	-	-	163	140	H
			*2.483593	54.67	RMS	32.5	0	-40.11	47.06	54	-6.94	-	-	163	140	H
			*2.4835	66.92	Pk	32.5	0	-40.12	59.3	-	-	74	-14.7	204	284	V
EHT20 (RU 26 / Index 8)	2472	4+3	*2.483525	66.36	Pk	32.5	0	-40.11	58.75	-	-	74	-15.25	204	284	V
			*2.4835	51.72	RMS	32.5	0	-40.12	44.1	54	-9.9	-	-	204	284	V
			*2.483512	52.23	RMS	32.5	0	-40.11	44.62	54	-9.38	-	-	204	284	V
			*2.4835	72.78	Pk	32.4	0	-37.41	67.77	-	-	74	-6.23	324	141	H
			*2.483579	73.77	Pk	32.4	0	-37.41	68.76	-	-	74	-5.24	324	141	H
			*2.4835	52.71	RMS	32.4	0	-37.41	47.7	54	-6.3	-	-	324	141	H
			*2.483566	53.01	RMS	32.4	0	-37.41	48	54	-6	-	-	324	141	H
	2472	4+3	*2.4835	71.73	Pk	32.4	0	-37.41	66.72	-	-	74	-7.28	239	380	V
			*2.483512	72.43	Pk	32.4	0	-37.41	67.42	-	-	74	-6.58	239	380	V
			*2.4835	50.76	RMS	32.4	0	-37.41	45.75	54	-8.25	-	-	239	380	V
			*2.483525	52.32	RMS	32.4	0	-37.41	47.31	54	-6.69	-	-	239	380	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

WORST-CASE HIGH BANDEDGE
11n HT20 Mode / SISO ANT 3 / CHANNEL 10 / 2457 MHz/State A:

HORIZONTAL RESULT

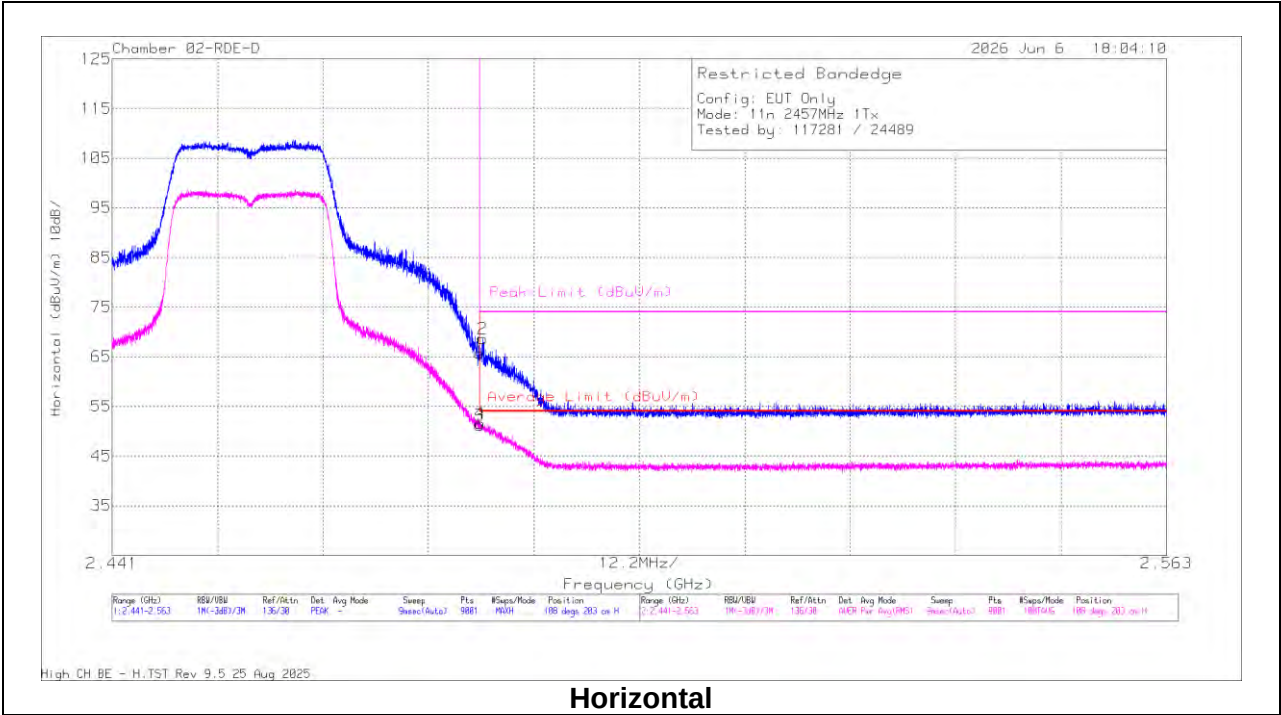


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	226674 ACF (dBm)	AmplChl (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Altitude (m)	Height (cm)	Polarity
1	* 2.4835	72.19	PK	32.2	-38.7	0	65.69	-	-	74	-8.31	108	203	H
2	* 2.483905	75.13	PK	32.2	-38.7	0	68.63	-	-	74	-5.37	108	203	H
3	* 2.4835	57.68	RMS	32.2	-38.7	0	51.18	54	-2.82	-	-	108	203	H
4	* 2.483607	58.05	RMS	32.2	-38.7	0	51.55	54	-2.45	-	-	108	203	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

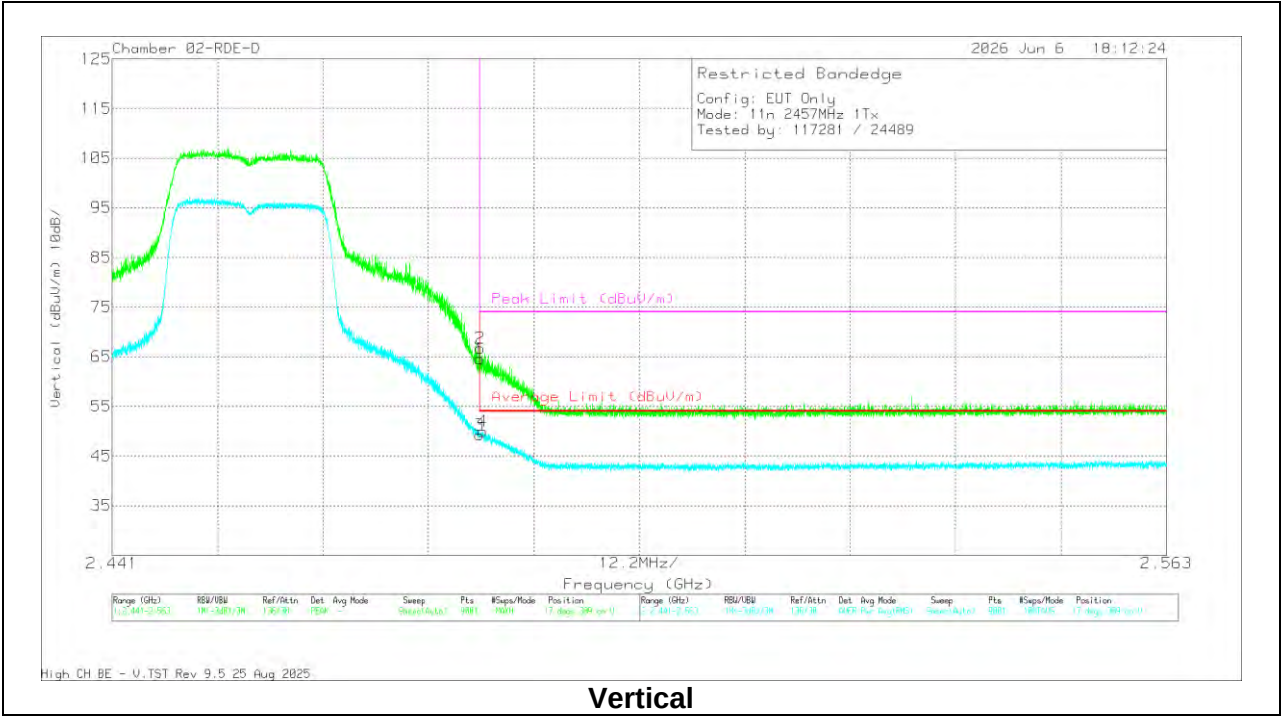

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBUV)	Det	226674 ACF (dBm)	Amp/Chl (dB)	DCCF (dB)	Corrected Reading (dBUV/m)	Average Limit (dBUV/m)	Margin (dB)	Peak Limit (dBUV/m)	Margin (dB)	Asimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	73.11	Pk	32.2	-38.7	0	64.51	-	-	74	-9.39	17	309	V
2	* 2.483607	73.21	Pk	32.2	-38.7	0	66.71	-	-	74	-7.29	17	309	V
3	* 2.4835	55.75	RMS	32.2	-38.7	0	49.25	54	-4.75	-	-	17	309	V
4	* 2.483954	56.44	RMS	32.2	-38.7	0	49.94	54	-4.06	-	-	17	309	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

9.1.16. 802.11b MIMO MODE – HARMONIC AND SPURIOUS EMISSIONS

State A

DTS (MIMO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
b-Mode	2412	4+3	* 4.824015	47.69	MAv1	34	0	-47.7	33.99	54	-20.01	-	-	360	101	H
			* 4.823402	58.21	PK2	34	0	-47.76	44.45	-	-	74	-29.55	360	101	H
			* 4.824015	47.58	MAv1	34	0	-47.7	33.88	54	-20.12	-	-	360	101	V
			* 4.795308	58.96	PK2	34	0	-47.9	45.06	-	-	74	-28.94	360	101	V
			* 7.249128	44.37	MAv1	35.7	0	-45.01	35.06	54	-18.94	-	-	360	200	H
			* 7.252582	56.14	PK2	35.7	0	-45.1	46.74	-	-	74	-27.26	360	200	H
			* 7.232	44.5	MAv1	35.7	0	-45.1	35.1	54	-18.9	-	-	360	101	V
			* 7.221417	56.2	PK2	35.7	0	-45.04	46.86	-	-	74	-27.14	360	101	V
			9.648016	45.62	MAv1	36.7	0	-44.3	38.02	-	-	-	-	360	200	H
			9.649732	57.23	PK2	36.7	0	-44.3	49.63	-	-	-	-	360	200	H
			9.633901	44.85	MAv1	36.6	0	-44.39	37.06	-	-	-	-	360	101	V
			9.631794	56.53	PK2	36.6	0	-44.3	48.83	-	-	-	-	360	101	V
			* 4.847823	58.43	PK2	34	0	-47.78	44.65	-	-	74	-29.35	1	200	H
			* 4.831606	46.7	MAv1	34	0	-47.76	32.94	54	-21.06	-	-	1	200	H
b-Mode	2437	4+3	* 7.324821	56.48	PK2	35.6	0	-45.2	46.88	-	-	74	-27.12	1	101	H
			* 7.29419	44.63	MAv1	35.6	0	-45.1	35.13	54	-18.87	-	-	1	101	H
			* 4.832393	58.4	PK2	34	0	-47.76	44.64	-	-	74	-29.36	1	101	V
			* 4.833419	46.65	MAv1	34	0	-47.7	32.95	54	-21.05	-	-	1	101	V
			* 7.306372	56.47	PK2	35.7	0	-45.16	47.01	-	-	74	-26.99	1	200	V
			* 7.316288	44.54	MAv1	35.6	0	-45.03	35.11	54	-18.89	-	-	1	200	V
			9.750908	56.49	PK2	36.8	0	-44.3	48.99	-	-	-	-	1	101	V
			9.759308	45	MAv1	36.8	0	-44.4	37.4	-	-	-	-	1	101	V
			9.759901	44.92	MAv1	36.8	0	-44.4	37.32	-	-	-	-	1	101	H
			9.778923	56.64	PK2	36.8	0	-44.4	49.04	-	-	-	-	1	101	H
			* 4.932171	58.95	PK2	34.1	0	-47.72	45.33	-	-	74	-28.67	112	358	H
			* 4.941123	46.57	MAv1	34.1	0	-47.61	33.06	54	-20.94	-	-	112	358	H
			* 4.93789	58.98	PK2	34.1	0	-47.7	45.38	-	-	74	-28.62	221	385	V
			* 4.943743	46.66	MAv1	34.1	0	-47.7	33.06	54	-20.94	-	-	221	385	V
b-Mode	2472	4+3	9.87821	45.09	MAv1	36.9	0	-44.62	37.37	-	-	-	-	7	116	V
			9.887811	57.2	PK2	37	0	-44.6	49.6	-	-	-	-	200	117	H
			9.888047	48.43	MAv1	37	0	-44.6	40.83	-	-	-	-	200	117	H
			9.908468	56.95	PK2	37	0	-44.8	49.15	-	-	-	-	7	116	V
			17.61012	52.4	PK2	41.9	0	-36.2	58.1	-	-	-	-	8	173	H
			17.64369	40.34	MAv1	41.8	0	-36.1	46.04	-	-	-	-	8	173	H
			17.64752	53.01	PK2	41.7	0	-36.1	58.61	-	-	-	-	137	330	V
			17.66279	41.23	MAv1	41.7	0	-36.2	46.73	-	-	-	-	137	330	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection



State B

DTS (MIMO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
b-Mode	2412	4+3	* 4.821304	58.49	PK2	34	0	-47.73	44.76	-	-	74	-29.24	360	101	H
			* 4.835091	46.66	MAv1	34	0	-47.7	32.96	54	-21.04	-	-	360	101	H
			* 4.838353	58.54	PK2	34	0	-47.6	44.94	-	-	74	-29.06	360	101	V
			* 4.836531	46.51	MAv1	34	0	-47.65	32.86	54	-21.14	-	-	360	101	V
			7.212825	56.32	PK2	35.7	0	-44.98	47.04	-	-	-	-	360	199	H
			7.223514	44.8	MAv1	35.7	0	-45	35.5	-	-	-	-	360	199	H
			7.225112	55.98	PK2	35.7	0	-45	46.68	-	-	-	-	360	101	V
			7.231147	44.52	MAv1	35.7	0	-45.19	35.03	-	-	-	-	360	101	V
			9.647691	45.38	MAv1	36.7	0	-44.3	37.78	-	-	-	-	164	130	H
			9.647798	57.18	PK2	36.7	0	-44.3	49.58	-	-	-	-	164	130	H
			9.661984	44.7	MAv1	36.7	0	-44.4	37	-	-	-	-	72	110	V
			9.662108	56.38	PK2	36.7	0	-44.39	48.69	-	-	-	-	72	110	V
b-Mode	2437	4+3	* 4.874294	58.49	PK2	34	0	-47.6	44.89	-	-	74	-29.11	0	200	H
			* 4.874027	47.81	MAv1	34	0	-47.6	34.21	54	-19.79	-	-	0	200	H
			* 7.304608	56.5	PK2	35.7	0	-45.1	47.1	-	-	74	-26.9	0	200	H
			* 7.31163	44.74	MAv1	35.7	0	-45.2	35.24	54	-18.76	-	-	0	200	H
			* 4.873877	58.78	PK2	34	0	-47.61	45.17	-	-	74	-28.83	2	161	V
			* 4.873886	48.81	MAv1	34	0	-47.61	35.2	54	-18.8	-	-	2	161	V
			* 7.30857	56.51	PK2	35.7	0	-45.2	47.01	-	-	74	-26.99	336	101	V
			* 7.323624	44.67	MAv1	35.6	0	-45.16	35.11	54	-18.89	-	-	336	101	V
			9.74792	47.86	MAv1	36.8	0	-44.31	40.35	-	-	-	-	72	192	V
			9.747975	48.9	MAv1	36.8	0	-44.3	41.4	-	-	-	-	336	101	H
			9.748044	57.34	PK2	36.8	0	-44.3	49.84	-	-	-	-	72	192	V
			9.748162	57.86	PK2	36.8	0	-44.32	50.34	-	-	-	-	336	101	H
b-Mode	2472	4+3	* 4.943479	58.43	PK2	34.1	0	-47.7	44.83	-	-	74	-29.17	360	101	H
			* 4.94479	46.68	MAv1	34.1	0	-47.54	33.24	54	-20.76	-	-	360	101	H
			* 7.423987	55.92	PK2	35.7	0	-45	46.62	-	-	74	-27.38	360	200	H
			* 7.419218	44.42	MAv1	35.7	0	-44.9	35.22	54	-18.78	-	-	360	200	H
			* 4.940272	58.28	PK2	34.1	0	-47.67	44.71	-	-	74	-29.29	360	101	V
			* 4.939072	46.53	MAv1	34.1	0	-47.7	32.93	54	-21.07	-	-	360	101	V
			* 7.402496	56.6	PK2	35.7	0	-44.8	47.5	-	-	74	-26.5	360	200	V
			* 7.421305	44.48	MAv1	35.7	0	-44.97	35.21	54	-18.79	-	-	360	200	V
			9.634034	56.18	PK2	36.6	0	-44.4	48.38	-	-	-	-	360	101	H
			9.636074	44.56	MAv1	36.7	0	-44.29	36.97	-	-	-	-	360	200	V
			9.663754	56.58	PK2	36.7	0	-44.3	48.98	-	-	-	-	360	200	V
			9.66399	44.62	MAv1	36.7	0	-44.3	37.02	-	-	-	-	360	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

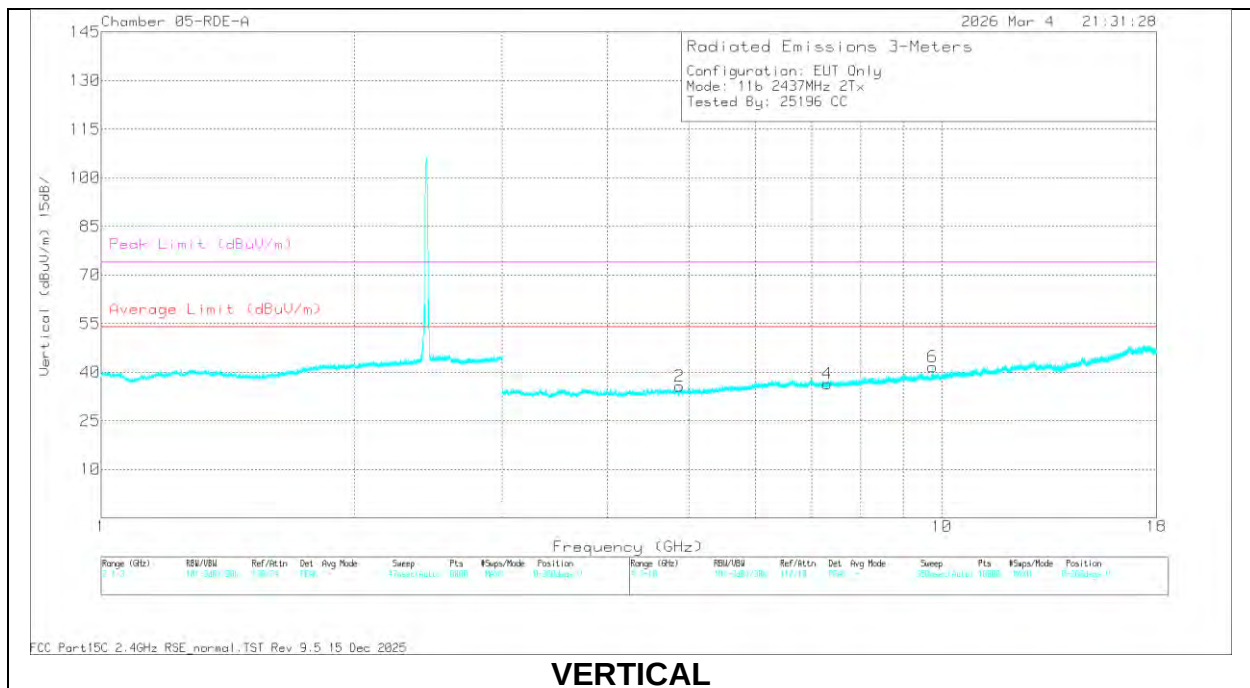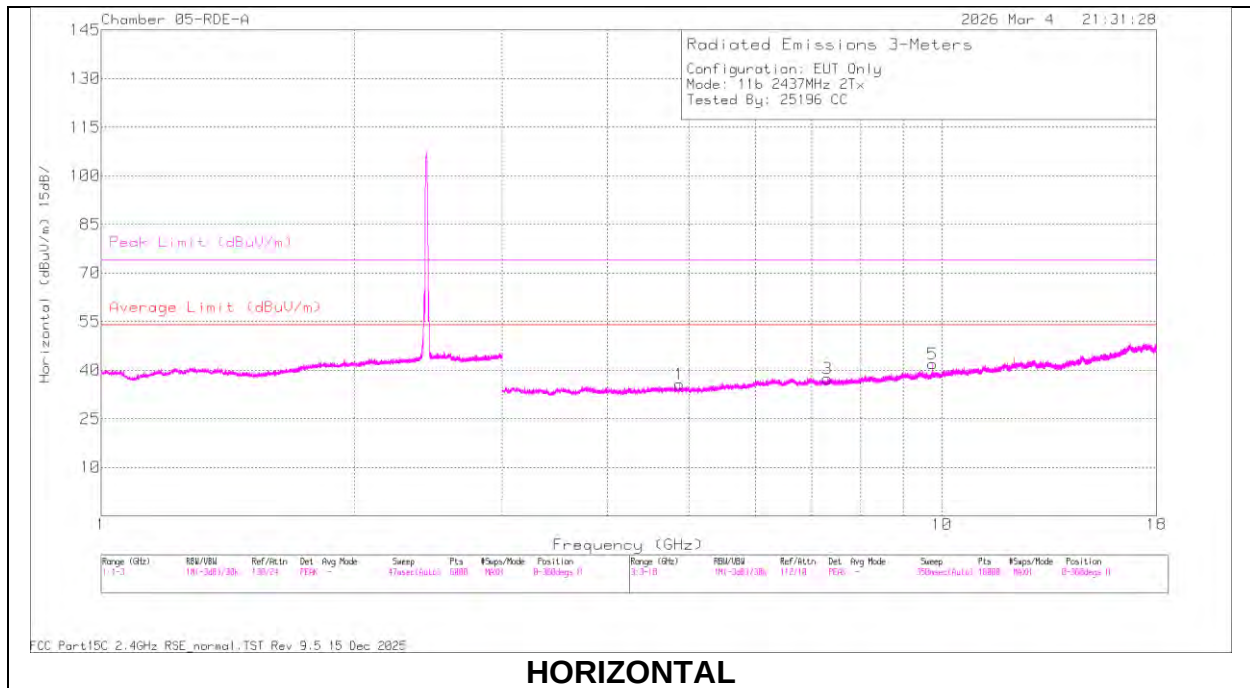**WORST-CASE HARMONIC AND SPURIOUS EMISSIONS:
b-Mode / MIMO CDD / CHANNEL 6 / 2437 MHz/ State B:**

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	80403 ACF (dBm)	DCCF (dB)	GainLoss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.874294	58.49	PK2	34	0	-47.6	44.89	-	-	74	-29.11	0	200	H
* 4.874027	47.81	MAv1	34	0	-47.6	34.21	54	-19.79	-	-	0	200	H
* 7.304608	56.5	PK2	35.7	0	-45.1	47.1	-	-	74	-26.9	0	200	H
* 7.311163	44.74	MAv1	35.7	0	-45.2	35.24	54	-18.76	-	-	0	200	H
* 4.873877	58.78	PK2	34	0	-47.61	45.17	-	-	74	-28.83	2	161	V
* 4.873886	49.81	MAv1	34	0	-47.61	35.2	-	-	-	-	2	161	V
* 7.30857	56.51	PK2	35.7	0	-45.2	47.01	-	-	74	-26.99	336	101	V
* 7.323624	44.67	MAv1	35.6	0	-45.16	35.11	54	-18.89	-	-	336	101	V
9.74792	47.86	MAv1	36.8	0	-44.31	40.35	-	-	-	-	72	192	V
9.747975	48.9	MAv1	36.8	0	-44.3	41.4	-	-	-	-	336	101	H
9.748044	57.34	PK2	36.8	0	-44.3	49.84	-	-	-	-	72	192	V
9.748162	57.86	PK2	36.8	0	-44.32	50.34	-	-	-	-	336	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

9.1.17. 802.11n HT20 MIMO CDD MODE – HARMONIC AND SPURIOUS EMISSIONS

State A

DTS (MIMO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
HT20	2412	4+3	* 4.819338	58.15	PK2	34	0	-47.73	44.42	-	-	74	-29.58	0	200	H
			* 4.834342	46.59	MAv1	34	0	-47.7	32.89	54	-21.11	-	-	0	200	H
			* 4.826651	58.09	PK2	34	0	-47.67	44.42	-	-	74	-29.58	0	200	V
			* 4.836989	46.62	MAv1	34	0	-47.6	33.02	54	-20.98	-	-	0	200	V
			7.215301	56.45	PK2	35.7	0	-45	47.15	-	-	-	-	0	101	V
			7.222155	44.52	MAv1	35.7	0	-45.08	35.14	-	-	-	-	0	101	V
			7.228888	56.36	PK2	35.7	0	-45.1	46.96	-	-	-	-	0	101	H
			7.246915	44.48	MAv1	35.7	0	-45.29	34.89	-	-	-	-	0	101	H
			9.640333	57.33	PK2	36.7	0	-44.1	49.93	-	-	-	-	0	101	V
			9.641108	56.34	PK2	36.7	0	-44.1	48.94	-	-	-	-	0	101	H
			9.649659	44.64	MAv1	36.7	0	-44.3	37.04	-	-	-	-	0	101	H
			9.664595	44.58	MAv1	36.7	0	-44.24	37.04	-	-	-	-	0	101	V
HT20	2437	4+3	* 4.838647	46.54	MAv1	34	0	-47.6	32.94	54	-21.06	-	-	42	199	H
			* 4.837723	58.46	PK2	34	0	-47.6	44.86	-	-	74	-29.14	42	199	H
			* 4.84691	46.44	MAv1	34	0	-47.7	32.74	54	-21.26	-	-	209	132	V
			* 4.85159	58.5	PK2	34	0	-47.7	44.8	-	-	74	-29.2	209	132	V
			7.763994	44.02	MAv1	35.8	0	-44.3	35.52	-	-	-	-	344	103	H
			7.767527	56.16	PK2	35.8	0	-44.25	47.71	-	-	-	-	344	103	H
			7.775129	43.98	MAv1	35.8	0	-44.29	35.49	-	-	-	-	319	191	V
			7.784498	55.75	PK2	35.8	0	-44.15	47.4	-	-	-	-	319	191	V
			16.71818	42.38	MAv1	41.9	0	-37.72	46.56	-	-	-	-	343	270	H
			16.71746	53.75	PK2	41.9	0	-37.7	57.95	-	-	-	-	343	270	H
			16.74439	41.83	MAv1	41.9	0	-37.6	46.13	-	-	-	-	76	112	V
			16.72666	53.43	PK2	41.9	0	-37.63	57.7	-	-	-	-	76	112	V
HT20	2472	4+3	* 9.413473	56.53	PK2	36.4	0	-43.4	49.53	-	-	74	-24.47	103	399	H
			* 9.432011	44.86	MAv1	36.4	0	-43.6	37.66	54	-16.34	-	-	103	399	H
			* 9.443797	56.92	PK2	36.4	0	-43.74	49.58	-	-	74	-24.42	203	275	V
			* 9.428077	44.69	MAv1	36.4	0	-43.61	37.48	54	-16.52	-	-	203	275	V
			5.96352	44.69	MAv1	35.3	0	-45.45	34.54	-	-	-	-	344	286	V
			5.968861	56.41	PK2	35.4	0	-45.41	46.4	-	-	-	-	27	172	H
			5.970346	44.75	MAv1	35.4	0	-45.43	34.72	-	-	-	-	27	172	H
			5.971871	56.53	PK2	35.4	0	-45.41	46.52	-	-	-	-	344	286	V
			16.70925	54.32	PK2	41.8	0	-37.8	58.32	-	-	-	-	42	359	H
			16.71094	42.85	MAv1	41.9	0	-37.8	46.95	-	-	-	-	42	359	H
			16.71889	41.97	MAv1	41.9	0	-37.79	46.08	-	-	-	-	108	179	V
			16.75228	54.37	PK2	41.8	0	-37.57	58.6	-	-	-	-	108	179	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average



State B

DTS (MIMO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
HT20	2412	4+3	* 4.890045	46.4	MAv1	34	0	-47.6	32.8	54	-21.2	-	-	360	101	H
			* 4.868911	58.14	PK2	34	0	-47.7	44.44	-	-	74	-29.56	360	101	H
			* 4.893352	46.68	MAv1	34	0	-47.64	33.04	54	-20.96	-	-	360	200	V
			* 4.880947	58.7	PK2	34	0	-47.7	45	-	-	74	-29	360	200	V
			* 7.310265	44.59	MAv1	35.6	0	-45.27	34.92	54	-19.08	-	-	360	200	H
			* 7.313403	56.21	PK2	35.7	0	-45.2	46.71	-	-	74	-27.29	360	200	H
			* 7.307768	44.48	MAv1	35.7	0	-45.18	35	54	-19	-	-	360	101	V
			* 7.317608	56.44	PK2	35.6	0	-45.04	47	-	-	74	-27	360	101	V
			9.748704	44.66	MAv1	36.8	0	-44.37	37.09	-	-	-	-	360	101	H
			9.754162	56.95	PK2	36.8	0	-44.3	49.45	-	-	-	-	360	101	H
			9.750755	44.8	MAv1	36.8	0	-44.3	37.3	-	-	-	-	360	200	V
			9.714941	56.63	PK2	36.8	0	-44.29	49.14	-	-	-	-	360	200	V
HT20	2437	4+3	* 4.877552	58.22	PK2	34	0	-47.66	44.56	-	-	74	-29.44	360	200	H
			* 4.884321	46.54	MAv1	34	0	-47.5	33.04	54	-20.96	-	-	360	200	H
			* 7.294254	56.18	PK2	35.6	0	-45.1	46.68	-	-	74	-27.32	360	200	H
			* 7.311819	44.59	MAv1	35.7	0	-45.2	35.09	54	-18.91	-	-	360	200	H
			* 4.859138	58.04	PK2	34	0	-47.71	44.33	-	-	74	-29.67	360	200	V
			* 4.883507	46.55	MAv1	34	0	-47.5	33.05	54	-20.95	-	-	360	200	V
			* 7.316262	56.46	PK2	35.6	0	-45.03	47.03	-	-	74	-26.97	360	101	V
			* 7.315239	44.54	MAv1	35.6	0	-45.15	34.99	54	-19.01	-	-	360	101	V
			9.750899	45.61	MAv1	36.8	0	-44.3	38.11	-	-	-	-	360	200	H
			9.751052	56.95	PK2	36.8	0	-44.3	49.45	-	-	-	-	360	200	V
			9.751134	56.79	PK2	36.8	0	-44.3	49.29	-	-	-	-	360	200	H
			9.756963	44.96	MAv1	36.8	0	-44.4	37.36	-	-	-	-	360	200	V
HT20	2472	4+3	* 4.938071	58.74	PK2	34.1	0	-47.7	45.14	-	-	74	-28.86	360	101	H
			* 4.941489	46.63	MAv1	34.1	0	-47.65	33.08	54	-20.92	-	-	360	101	H
			* 7.400914	57	PK2	35.7	0	-44.81	47.89	-	-	74	-26.11	360	200	H
			* 7.420634	44.59	MAv1	35.7	0	-44.96	35.33	54	-18.67	-	-	360	200	H
			* 4.943202	58.3	PK2	34.1	0	-47.7	44.7	-	-	74	-29.3	360	101	V
			* 4.932145	46.56	MAv1	34.1	0	-47.71	32.95	54	-21.05	-	-	360	101	V
			* 7.399211	56.5	PK2	35.7	0	-44.74	47.46	-	-	74	-26.54	360	101	V
			* 7.423714	44.57	MAv1	35.7	0	-45	35.27	54	-18.73	-	-	360	101	V
			9.881919	45.7	MAv1	36.9	0	-44.6	38	-	-	-	-	360	200	H
			9.88275	45.62	MAv1	36.9	0	-44.68	37.84	-	-	-	-	360	101	V
			9.88635	57.55	PK2	37	0	-44.6	49.95	-	-	-	-	360	101	V
			9.889039	57.39	PK2	37	0	-44.5	49.89	-	-	-	-	360	200	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

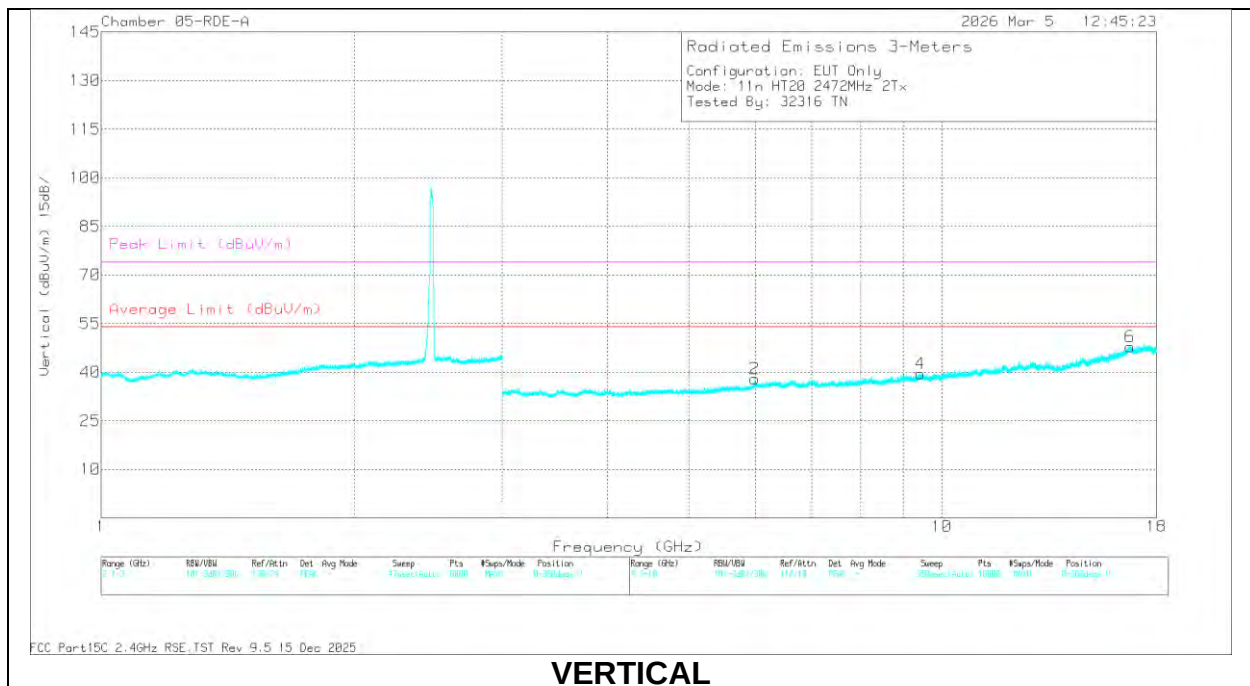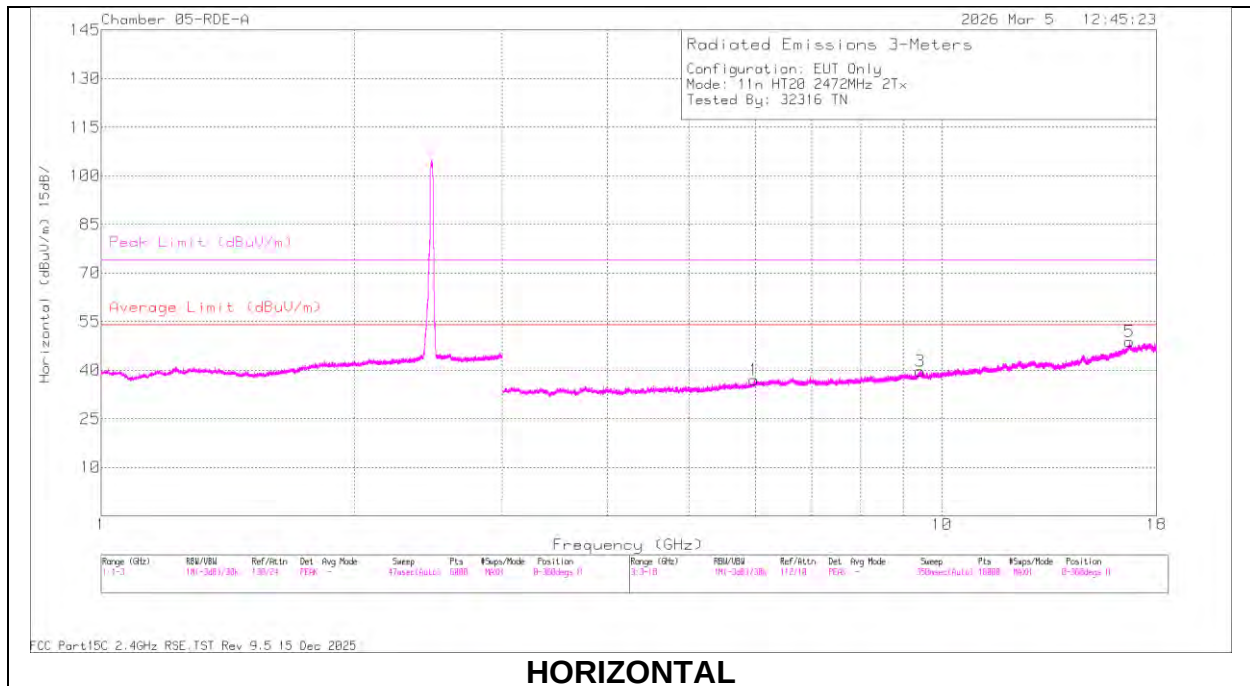**WORST-CASE HARMONIC AND SPURIOUS EMISSIONS:
n-Mode / HT20 / MIMO CDD / CHANNEL 13 / 2472 MHz /State A:**

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	80403 ACF (dBm)	DCCF (dB)	GainLoss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 9.413473	56.53	PK2	36.4	0	-43.4	49.53	-	-	74	-24.47	103	399	H
* 9.432011	44.86	MAv1	36.4	0	-43.6	37.66	54	-16.34	-	-	103	399	H
* 9.443797	56.92	PK2	36.4	0	-43.74	49.58	-	-	74	-24.42	203	275	V
* 9.428077	44.69	MAv1	36.4	0	-43.61	37.48	54	-16.52	-	-	203	275	V
5.963352	44.69	MAv1	35.3	0	-45.45	34.54	-	-	-	-	344	286	V
5.968861	56.41	PK2	35.4	0	-45.41	46.4	-	-	-	-	27	172	H
5.970346	44.75	MAv1	35.4	0	-45.43	34.72	-	-	-	-	27	172	H
5.971871	56.53	PK2	35.4	0	-45.41	46.52	-	-	-	-	344	286	V
16.709253	54.32	PK2	41.8	0	-37.8	58.32	-	-	-	-	42	359	H
16.710937	42.85	MAv1	41.9	0	-37.8	46.95	-	-	-	-	42	359	H
16.71889	41.97	MAv1	41.9	0	-37.79	46.08	-	-	-	-	108	179	V
16.752276	54.37	PK2	41.8	0	-37.57	58.6	-	-	-	-	108	179	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

9.1.18. 802.11be EHT20 MIMO CDD SU MODE – HARMONIC AND SPURIOUS EMISSIONS

State A

DTS (MIMO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (SU)	2412	4+3	* 4.837625	58.35	PK2	34	0	-47.6	44.75	-	-	74	-29.25	360	200	H
			* 4.834305	46.74	MAv1	34	0	-47.7	33.04	54	-20.96	-	-	360	200	H
			* 4.820198	58.07	PK2	34	0	-47.78	44.29	-	-	74	-29.71	360	200	V
			* 4.835171	46.47	MAv1	34	0	-47.7	32.77	54	-21.23	-	-	360	200	V
			7.214326	56.45	PK2	35.7	0	-45.07	47.08	-	-	-	-	360	101	V
			7.227902	44.74	MAv1	35.7	0	-45.09	35.35	-	-	-	-	360	101	H
			7.233015	44.58	MAv1	35.7	0	-45.1	35.18	-	-	-	-	360	101	V
			7.245897	56.17	PK2	35.7	0	-45.2	46.67	-	-	-	-	360	101	H
			9.64983	57.07	PK2	36.7	0	-44.3	49.47	-	-	-	-	360	101	V
			9.651519	44.71	MAv1	36.7	0	-44.25	37.16	-	-	-	-	360	101	H
			9.65955	56.41	PK2	36.7	0	-44.4	48.71	-	-	-	-	360	101	H
			9.662621	44.68	MAv1	36.7	0	-44.34	37.04	-	-	-	-	360	101	V
			* 4.832218	58.14	PK2	34	0	-47.78	44.36	-	-	74	-29.64	360	101	H
			* 4.831502	46.52	MAv1	34	0	-47.75	32.77	54	-21.23	-	-	360	101	H
EHT20 (SU)	2437	4+3	* 4.837811	58.32	PK2	34	0	-47.6	44.72	-	-	74	-29.28	360	200	V
			* 4.832327	46.8	MAv1	34	0	-47.77	33.03	54	-20.97	-	-	360	200	V
			7.21585	56.04	PK2	35.7	0	-45	46.74	-	-	-	-	360	200	V
			7.223423	56.18	PK2	35.7	0	-45	46.88	-	-	-	-	360	101	H
			7.22669	44.49	MAv1	35.7	0	-45	35.19	-	-	-	-	360	200	V
			7.231032	44.43	MAv1	35.7	0	-45.2	34.93	-	-	-	-	360	101	H
			9.635239	44.74	MAv1	36.7	0	-44.3	37.14	-	-	-	-	360	200	V
			9.652733	56.54	PK2	36.7	0	-44.2	49.04	-	-	-	-	360	101	H
			9.658941	56.18	PK2	36.7	0	-44.4	48.48	-	-	-	-	360	200	V
			9.66403	44.59	MAv1	36.7	0	-44.3	36.99	-	-	-	-	360	101	H
			* 4.942555	58.52	PK2	34.1	0	-47.7	44.92	-	-	74	-29.08	360	199	H
EHT20 (SU)	2472	4+3	* 4.938582	46.49	MAv1	34.1	0	-47.7	32.89	54	-21.11	-	-	360	199	H
			* 7.438217	56.79	PK2	35.7	0	-44.9	47.59	-	-	74	-26.41	360	199	H
			* 7.425568	44.43	MAv1	35.7	0	-45.04	35.09	54	-18.91	-	-	360	199	H
			* 4.953929	58.28	PK2	34.1	0	-47.51	44.87	-	-	74	-29.13	360	200	V
			* 4.942498	46.45	MAv1	34.1	0	-47.7	32.85	54	-21.15	-	-	360	200	V
			* 7.440001	56.29	PK2	35.7	0	-45.1	46.89	-	-	74	-27.11	360	101	V
			* 7.435459	44.47	MAv1	35.7	0	-44.9	35.27	54	-18.73	-	-	360	101	V
			9.878921	56.84	PK2	36.9	0	-44.69	49.05	-	-	-	-	360	101	H
			9.881848	56.97	PK2	36.9	0	-44.6	49.27	-	-	-	-	360	101	V
			9.891979	45.08	MAv1	37	0	-44.6	37.48	-	-	-	-	360	101	H
			9.910675	45.07	MAv1	37	0	-44.77	37.3	-	-	-	-	360	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

State B



DTS (MIMO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (SU)	2412	4+3	* 4.797375	46.55	MAv1	34	0	-47.8	32.75	54	-21.25	-	-	360	101	H
			* 4.800944	58.5	PK2	34	0	-47.89	44.61	-	-	74	-29.39	360	101	H
			* 4.832428	46.82	MAv1	34	0	-47.76	33.06	54	-20.94	-	-	360	200	V
			* 4.820735	59.77	PK2	34	0	-47.73	46.04	-	-	74	-27.96	360	200	V
			* 7.227489	44.67	MAv1	35.7	0	-45.05	35.32	54	-18.68	-	-	360	101	H
			* 7.236631	56.26	PK2	35.7	0	-45.1	46.86	-	-	74	-27.14	360	101	H
			* 7.262427	44.63	MAv1	35.7	0	-45.14	35.19	54	-18.81	-	-	360	200	V
			* 7.234418	56.25	PK2	35.7	0	-45.1	46.85	-	-	74	-27.15	360	200	V
			9.652327	44.93	MAv1	36.7	0	-44.2	37.43	-	-	-	-	360	200	H
			9.672016	56.98	PK2	36.7	0	-44.2	49.48	-	-	-	-	360	200	H
			9.652971	44.87	MAv1	36.7	0	-44.2	37.37	-	-	-	-	360	101	V
			9.654873	56.52	PK2	36.7	0	-44.2	49.02	-	-	-	-	360	101	V
			* 4.893863	46.44	MAv1	34	0	-47.69	32.75	54	-21.25	-	-	360	200	H
			* 4.882276	58.46	PK2	34	0	-47.57	44.89	-	-	74	-29.11	360	200	H
EHT20 (SU)	2437	4+3	* 4.896041	46.56	MAv1	34	0	-47.6	32.96	54	-21.04	-	-	360	200	V
			* 4.89437	58.35	PK2	34	0	-47.66	44.69	-	-	74	-29.31	360	200	V
			* 7.311677	44.61	MAv1	35.7	0	-45.2	35.11	54	-18.89	-	-	360	200	H
			* 7.30285	56.48	PK2	35.6	0	-45.21	46.87	-	-	74	-27.13	360	200	H
			* 7.324155	44.6	MAv1	35.6	0	-45.2	35	54	-19	-	-	360	200	V
			* 7.318186	56.4	PK2	35.6	0	-45	47	-	-	74	-27	360	200	V
			9.742786	44.76	MAv1	36.8	0	-44.2	37.36	-	-	-	-	360	200	H
			9.738057	56.69	PK2	36.8	0	-44.29	49.2	-	-	-	-	360	200	H
			9.742586	44.77	MAv1	36.8	0	-44.2	37.37	-	-	-	-	360	200	V
			9.745519	56.81	PK2	36.8	0	-44.25	49.36	-	-	-	-	360	200	V
			* 4.947798	46.55	MAv1	34.1	0	-47.68	32.97	54	-21.03	-	-	360	101	H
			* 4.949211	58.4	PK2	34.1	0	-47.68	44.82	-	-	74	-29.18	360	101	H
			* 4.940703	46.52	MAv1	34.1	0	-47.63	32.99	54	-21.01	-	-	360	101	V
			* 4.943187	58.37	PK2	34.1	0	-47.7	44.77	-	-	74	-29.23	360	101	V
EHT20 (SU)	2472	4+3	* 7.419461	44.69	MAv1	35.7	0	-44.9	35.49	54	-18.51	-	-	360	101	H
			* 7.430887	57.78	PK2	35.7	0	-44.99	48.49	-	-	74	-25.51	360	101	H
			* 7.426655	44.59	MAv1	35.7	0	-44.93	35.36	54	-18.64	-	-	360	101	V
			* 7.421588	56.73	PK2	35.7	0	-44.94	47.49	-	-	74	-26.51	360	101	V
			9.876626	45.85	MAv1	36.9	0	-44.66	38.09	-	-	-	-	360	101	H
			9.886404	57.49	PK2	37	0	-44.6	49.89	-	-	-	-	360	101	H
			9.893766	45.28	MAv1	37	0	-44.5	37.78	-	-	-	-	360	200	V
			9.882268	57.45	PK2	36.9	0	-44.63	49.72	-	-	-	-	360	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

WORST-CASE HARMONIC AND SPURIOUS EMISSIONS:
be-Mode / EHT20 / MIMO CDD / CHANNEL 13 / 2472 MHz/State B:

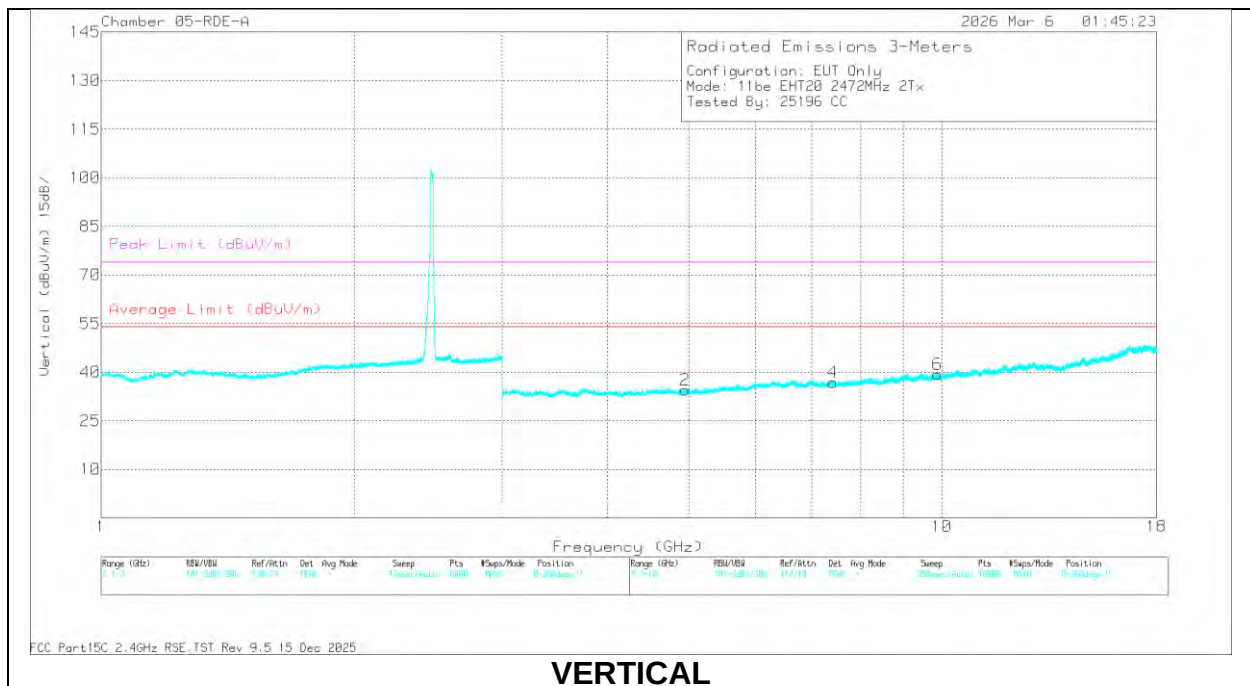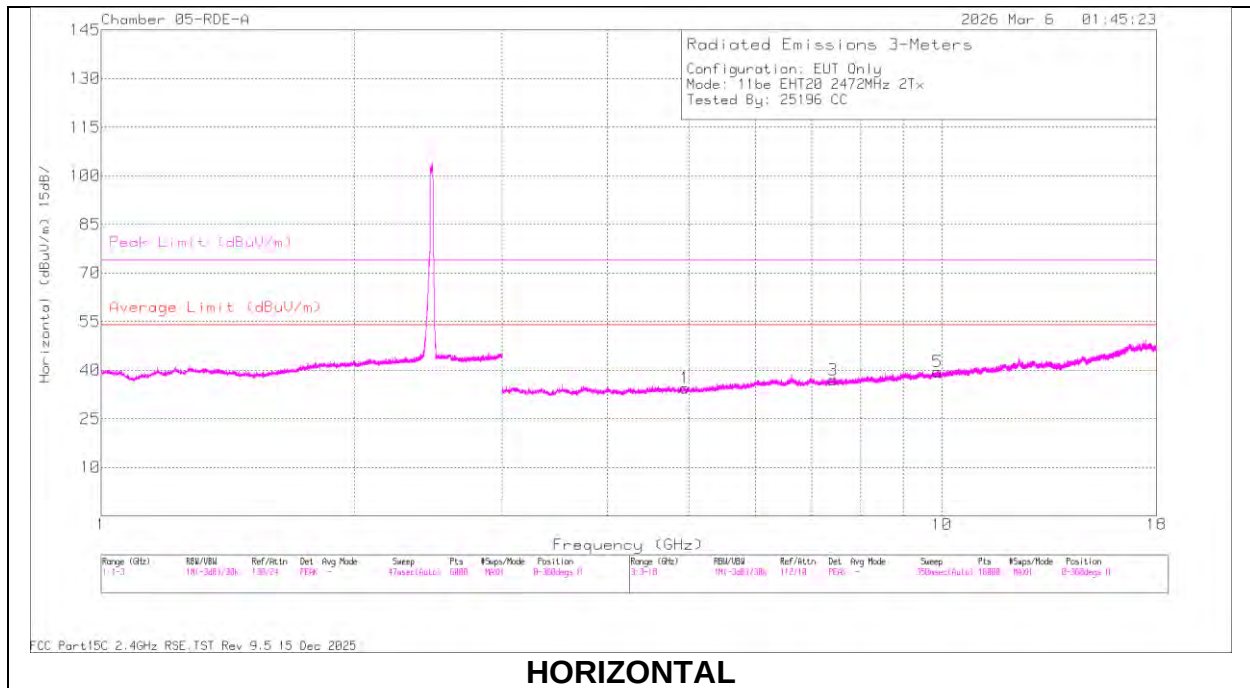

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	80403 ACF (dBm)	DCCF (dB)	GainLoss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.949211	58.4	PK2	34.1	0	-47.68	44.82	-	-	74	-29.18	360	101	H
* 4.947798	46.55	MAv1	34.1	0	-47.68	32.97	54	-21.03	-	-	360	101	H
* 7.430887	57.78	PK2	35.7	0	-44.99	48.49	-	-	74	-25.51	360	101	H
* 7.419461	44.69	MAv1	35.7	0	-44.9	35.49	54	-18.51	-	-	360	101	H
* 4.943187	58.37	PK2	34.1	0	-47.7	44.77	-	-	74	-29.23	360	101	V
* 4.940703	46.52	MAv1	34.1	0	-47.63	32.99	54	-21.01	-	-	360	101	V
* 7.421588	56.73	PK2	35.7	0	-44.94	47.49	-	-	74	-26.51	360	101	V
* 7.426655	44.59	MAv1	35.7	0	-44.93	35.36	54	-18.64	-	-	360	101	V
9.876626	45.85	MAv1	36.9	0	-44.66	38.09	-	-	-	-	360	101	H
9.882268	57.45	PK2	36.9	0	-44.63	49.72	-	-	-	-	360	200	V
9.886404	57.49	PK2	37	0	-44.6	49.89	-	-	-	-	360	101	H
9.893766	45.28	MAv1	37	0	-44.5	37.78	-	-	-	-	360	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

9.1.19. 802.11be EHT20 MIMO CDD PARTIAL RU MODE – HARMONIC AND SPURIOUS EMISSIONS

State A

DTS (MIMO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (RU 26T/ Index 0)	2412	4+3	* 4.857832	59.8	PK2	34.3	0	-48.3	45.8	-	-	74	-28.2	360	200	H
			* 4.856321	47.4	MAv1	34.3	0	-48.3	33.4	54	-20.6	-	-	360	200	H
			* 7.277007	56.83	PK2	35.6	0	-45.6	46.83	-	-	74	-27.17	360	101	H
			* 7.278581	45.02	MAv1	35.6	0	-45.6	35.02	54	-18.98	-	-	360	101	H
			* 9.357666	56.71	PK2	36.4	0	-44.7	48.41	-	-	74	-25.59	360	101	H
			* 9.369755	44.89	MAv1	36.4	0	-44.6	36.69	54	-17.31	-	-	360	101	H
			* 4.816966	59.06	PK2	34.3	0	-48.2	45.16	-	-	74	-28.84	360	101	V
			* 4.802517	47.42	MAv1	34.2	0	-48.05	33.57	54	-20.43	-	-	360	101	V
			* 7.275952	57.06	PK2	35.6	0	-45.6	47.06	-	-	74	-26.94	360	200	V
			* 7.25609	45.19	MAv1	35.6	0	-45.4	35.39	54	-18.61	-	-	360	200	V
			* 9.365482	56.21	PK2	36.4	0	-44.6	48.01	-	-	74	-25.99	360	200	V
			* 9.365406	44.85	MAv1	36.4	0	-44.6	36.65	54	-17.35	-	-	360	200	V
			* 11.037407	44.93	MAv1	37.9	0	-45.18	37.65	54	-16.35	-	-	360	200	V
			* 11.037664	45.13	MAv1	37.9	0	-45.19	37.84	54	-16.16	-	-	360	100	H
			* 11.043534	56.82	PK2	37.9	0	-45.12	49.6	-	-	74	-24.4	360	100	H
EHT20 (RU 26T/ Index 4)	2437	4+3	* 11.069909	56.5	PK2	37.9	0	-44.65	49.75	-	-	74	-24.25	360	200	V
			* 8.160337	56.61	PK2	35.9	0	-45.45	47.06	-	-	74	-26.94	360	100	H
			* 8.171419	44.84	MAv1	35.9	0	-45.5	35.24	54	-18.76	-	-	360	100	H
			* 8.175694	44.49	MAv1	35.9	0	-45.59	34.8	54	-19.2	-	-	360	201	V
			* 8.177384	56.75	PK2	35.9	0	-45.62	47.03	-	-	74	-26.97	360	201	V
			16.76348	45.02	MAv1	40.8	0	-42.88	42.94	-	-	-	-	360	100	H
			16.774521	56.37	PK2	40.8	0	-42.89	54.28	-	-	-	-	360	200	V
			16.774573	44.74	MAv1	40.8	0	-42.89	42.65	-	-	-	-	360	200	V
			16.794986	56.35	PK2	40.8	0	-42.66	54.49	-	-	-	-	360	100	H
			* 4.939379	58.44	PK2	34.3	0	-47.7	45.04	-	-	74	-28.96	1	199	H
EHT20 (RU 26T/ Index 8)	2472	4+3	* 4.913454	47.12	MAv1	34.3	0	-48	33.42	54	-20.58	-	-	1	199	H
			* 7.428975	57.05	PK2	35.6	0	-45.8	46.85	-	-	74	-27.15	1	199	H
			* 7.445357	45.38	MAv1	35.6	0	-45.8	35.18	54	-18.82	-	-	1	199	H
			* 9.484972	56.26	PK2	36.6	0	-44.5	48.36	-	-	74	-25.64	1	101	H
			9.501755	44.41	MAv1	36.6	0	-44.7	36.31	-	-	-	-	1	101	H
			* 4.988375	58.23	PK2	34.4	0	-47.5	45.13	-	-	74	-28.87	1	199	V
			* 4.979472	46.52	MAv1	34.4	0	-47.35	33.57	54	-20.43	-	-	1	199	V
			* 7.44198	57.39	PK2	35.6	0	-45.7	47.29	-	-	74	-26.71	1	199	V
			* 7.443571	45.49	MAv1	35.6	0	-45.8	35.29	54	-18.71	-	-	1	199	V
			* 9.484572	56.69	PK2	36.6	0	-44.5	48.79	-	-	74	-25.21	1	101	V
			* 9.479492	44.74	MAv1	36.6	0	-44.6	36.74	54	-17.26	-	-	1	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average



State B

DTS (MIMO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (RU 26T/ Index 0)	2412	4+3	*3.952278	57.41	PK2	33.5	0	-47.13	43.78	-	-	74	-30.22	311	199	V
			*3.956972	45.45	MAV1	33.5	0	-47.1	31.85	54	-22.15	-	-	311	199	V
			*3.957952	57.69	PK2	33.5	0	-47.1	44.09	-	-	74	-29.91	0	101	H
			*3.971507	45.71	MAV1	33.5	0	-46.95	32.26	54	-21.74	-	-	0	101	H
			7.218524	43.75	MAV1	35.7	0	-45.55	33.9	-	-	-	-	0	101	H
			7.219886	43.56	MAV1	35.7	0	-45.5	33.76	-	-	-	-	311	101	V
			7.225286	55.7	PK2	35.7	0	-45.37	46.03	-	-	-	-	311	101	V
			7.229955	56.17	PK2	35.7	0	-45.3	46.57	-	-	-	-	0	101	H
			*12.049005	39.85	MAV1	38.9	0	-38.6	40.15	54	-13.85	-	-	311	370	H
			*12.050125	51.41	PK2	38.9	0	-38.61	51.7	-	-	74	-22.3	311	370	H
			*12.058527	40.14	MAV1	38.9	0	-38.7	40.34	54	-13.66	-	-	222	384	V
			*12.067229	52.31	PK2	38.9	0	-38.8	52.41	-	-	74	-21.59	222	384	V
EHT20 (RU 26T/ Index 4)	2437	4+3	*12.18137	65.02	PK2	38.9	0	-41.5	62.42	-	-	74	-11.58	14	155	H
			*12.187361	48.48	MAV1	38.9	0	-41.5	45.88	54	-8.12	-	-	14	155	H
			*12.18872	58.23	PK2	38.9	0	-41.5	55.63	-	-	74	-18.37	63	216	V
			*12.183627	44.17	MAV1	38.9	0	-41.44	41.63	54	-12.37	-	-	63	216	V
			1.81967	50.01	MAV1	30.5	0	-40.4	40.11	-	-	-	-	0	101	H
			1.82603	50.3	MAV1	30.6	0	-40.3	40.6	-	-	-	-	0	200	V
			1.828923	61.81	PK2	30.6	0	-40.4	52.01	-	-	74	-21.99	0	200	V
			1.83483	61.8	PK2	30.7	0	-40.38	52.12	-	-	74	-21.88	0	101	H
			6.666282	55.79	PK2	35.7	0	-44.67	46.82	-	-	74	-27.18	0	200	H
			6.667745	44.23	MAV1	35.8	0	-44.67	35.36	-	-	-	-	0	200	H
			6.674523	44.12	MAV1	35.7	0	-44.7	35.12	-	-	-	-	14	200	V
			6.674803	56.3	PK2	35.7	0	-44.7	47.3	-	-	74	-26.7	14	200	V
EHT20 (RU 26T/ Index 8)	2472	4+3	*5.042504	58.22	PK2	34	0	-47.5	44.72	-	-	74	-29.28	0	101	H
			*5.063002	46.23	MAV1	34	0	-47.6	32.63	54	-21.37	-	-	0	101	H
			*11.198834	54.65	PK2	37.9	0	-41.8	50.75	-	-	74	-23.25	0	199	H
			*11.192372	42.95	MAV1	37.9	0	-41.9	38.95	54	-15.05	-	-	0	199	H
			*5.061676	58.31	PK2	34	0	-47.6	44.71	-	-	74	-29.29	0	199	V
			*5.051018	46.39	MAV1	34	0	-47.5	32.89	54	-21.11	-	-	0	199	V
			*11.190238	54.49	PK2	37.9	0	-41.92	50.47	-	-	74	-23.53	0	101	V
			*11.195861	42.69	MAV1	37.9	0	-41.9	38.69	54	-15.31	-	-	0	101	V
			2.05893	61.68	PK2	31.2	0	-40.4	52.48	-	-	74	-21.52	0	101	V
			2.06221	50.01	MAV1	31.3	0	-40.4	40.91	-	-	-	-	0	101	H
			2.063223	49.94	MAV1	31.3	0	-40.42	40.82	-	-	-	-	0	101	V
			2.082516	62.06	PK2	31.5	0	-40.35	53.21	-	-	74	-20.79	0	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

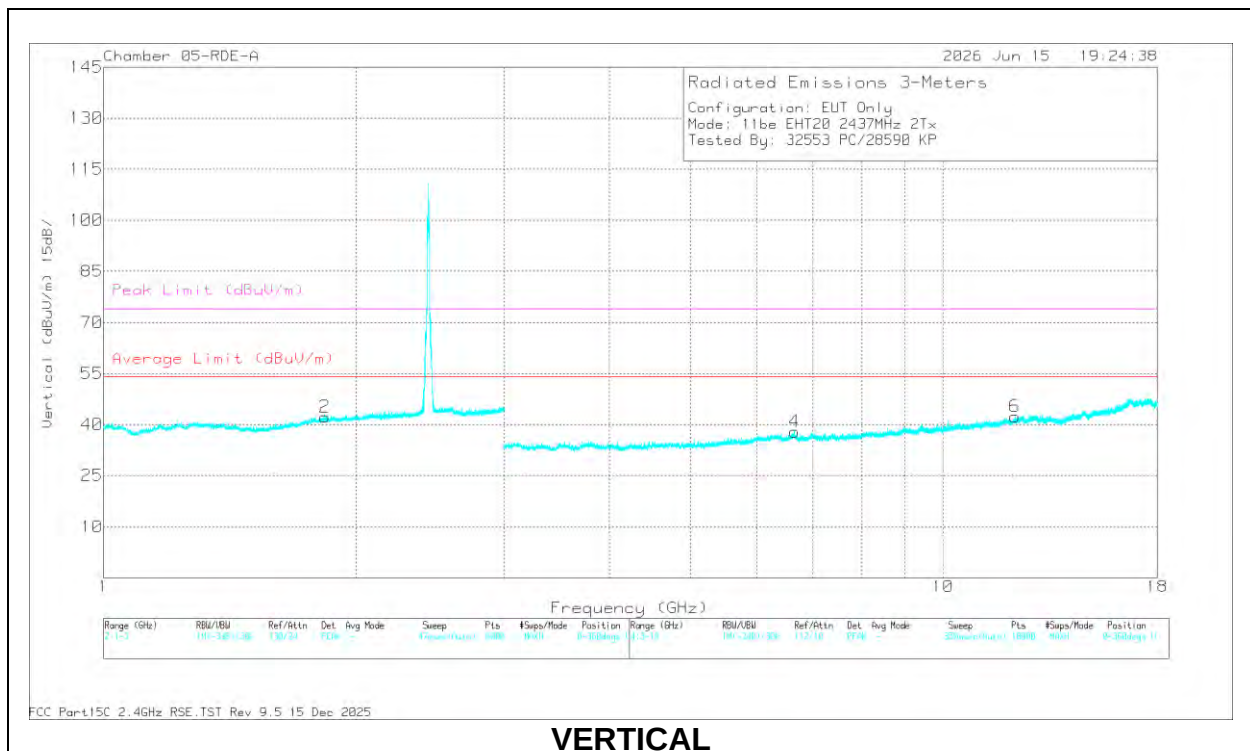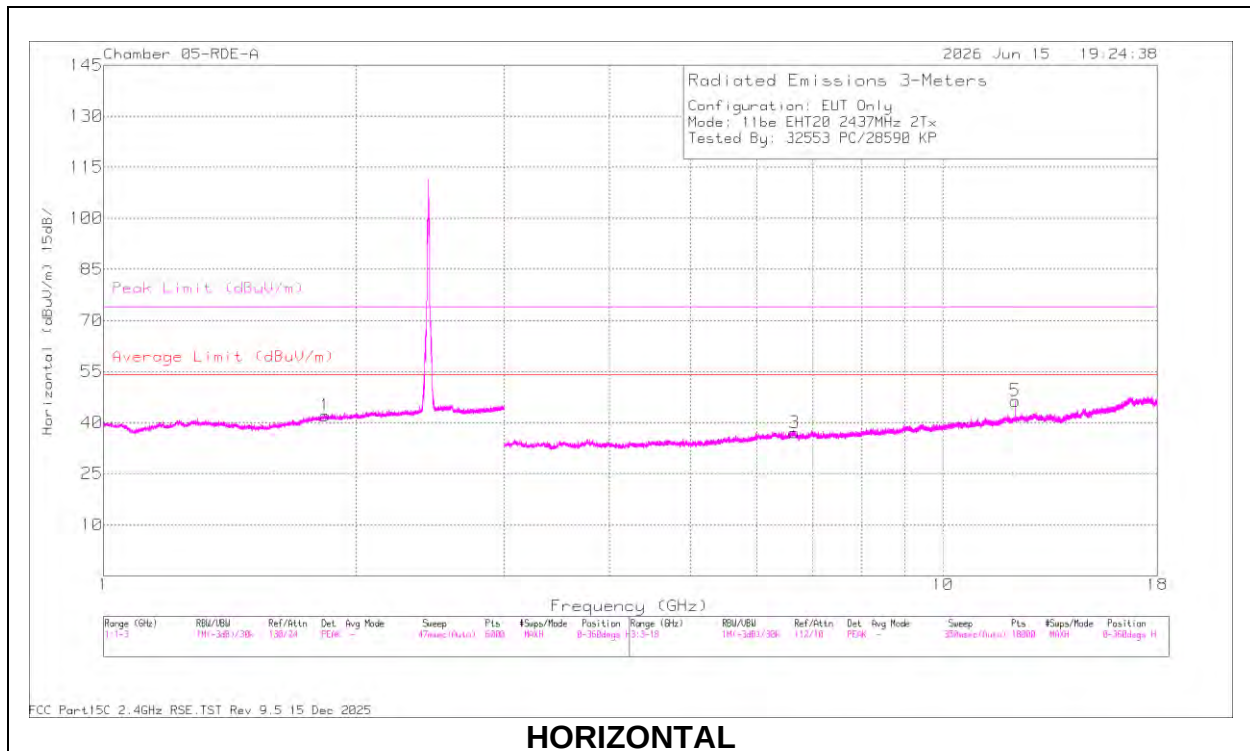**WORST-CASE HARMONIC AND SPURIOUS EMISSIONS:
EHT20 / MIMO CDD / PARTIAL RU MODE / CHANNEL 13 / 2437 MHz/State B:**

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	80403 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 12.18137	65.02	PK2	38.9	0	-41.5	62.42	-	-	74	-11.58	14	155	H
* 12.187361	48.48	MAV1	38.9	0	-41.5	45.88	54	-8.12	-	-	14	155	H
* 12.18872	58.23	PK2	38.9	0	-41.5	55.63	-	-	74	-18.37	63	216	V
* 12.183627	44.17	MAV1	38.9	0	-41.44	41.63	54	-12.37	-	-	63	216	V
1.81967	50.01	MAV1	30.5	0	-40.4	40.11	-	-	-	-	0	101	H
1.82603	50.3	MAV1	30.6	0	-40.3	40.6	-	-	-	-	0	200	V
1.828923	61.81	PK2	30.6	0	-40.4	52.01	-	-	74	-21.99	0	200	V
1.83483	61.8	PK2	30.7	0	-40.38	52.12	-	-	74	-21.88	0	101	H
6.666282	55.79	PK2	35.7	0	-44.67	46.82	-	-	74	-27.18	0	200	H
6.667745	44.23	MAV1	35.8	0	-44.67	35.36	-	-	-	-	0	200	H
6.674523	44.12	MAV1	35.7	0	-44.7	35.12	-	-	-	-	14	200	V
6.674803	56.3	PK2	35.7	0	-44.7	47.3	-	-	74	-26.7	14	200	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAV1 - KDB558074 Option 1 Maximum RMS Average

9.2. WORST CASE BELOW 1 GHz

State A

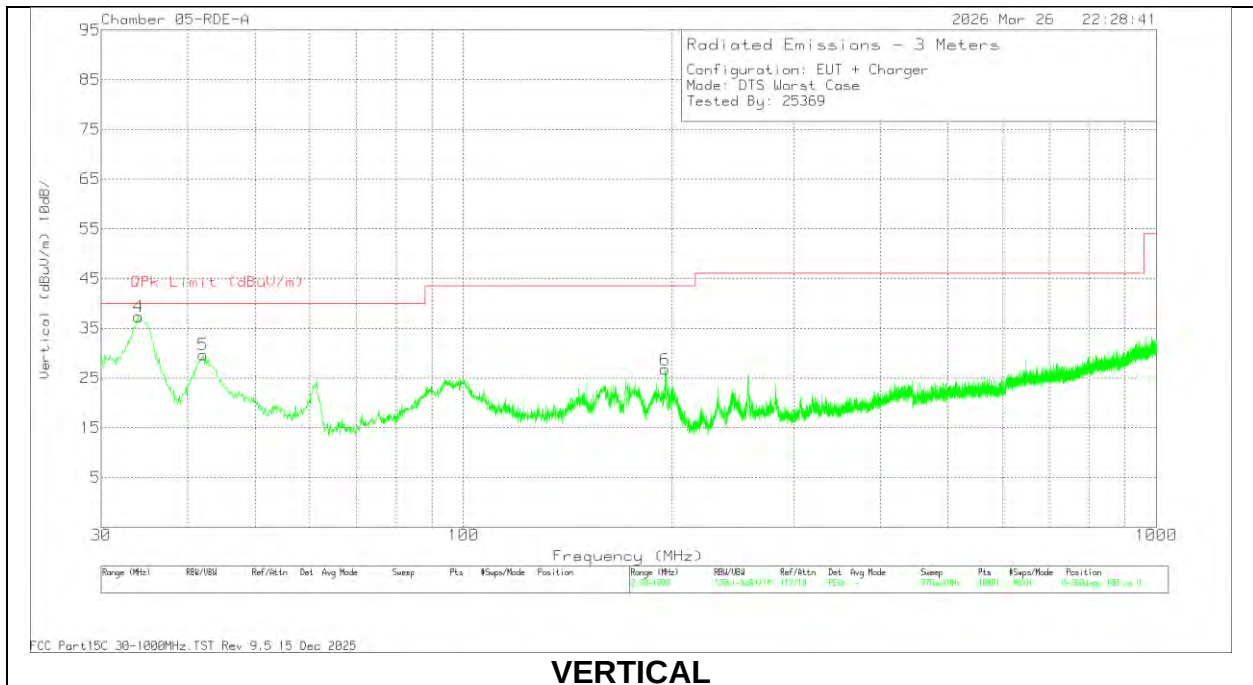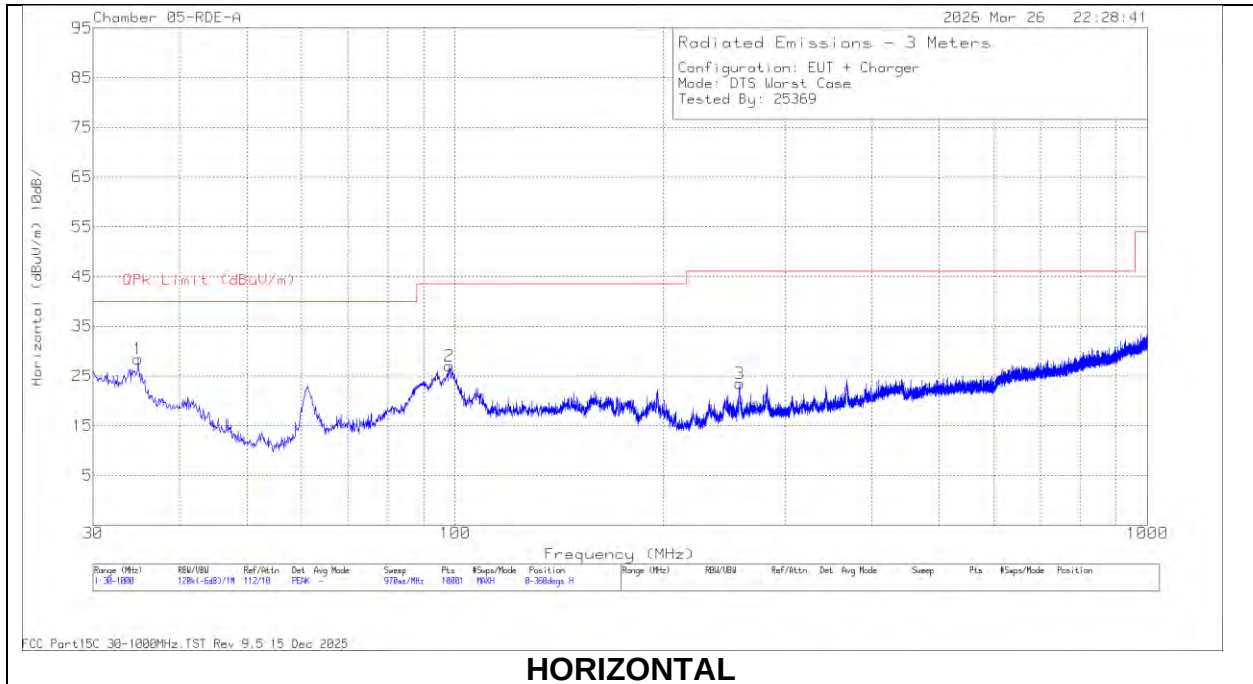



Radiated Emissions

Frequency (MHz)	Meter Reading (dBuV)	Det	204045 ACF (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 257.211	35.06	Qp	17.6	-30.9	21.76	46.02	-24.26	100	113	H
34.1512	41.78	Qp	24	-32.3	33.48	40	-6.52	277	104	V
34.9407	29.97	Qp	23.4	-32.3	21.07	40	-18.93	14	174	H
42.1046	39.53	Qp	18.1	-32.1	25.53	40	-14.47	251	100	V
98.094	38.7	Qp	15.7	-31.7	22.7	43.52	-20.82	342	311	H
195.679	33.15	Qp	18.1	-31.2	20.05	43.52	-23.47	67	103	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Qp - Quasi-Peak detector

State B

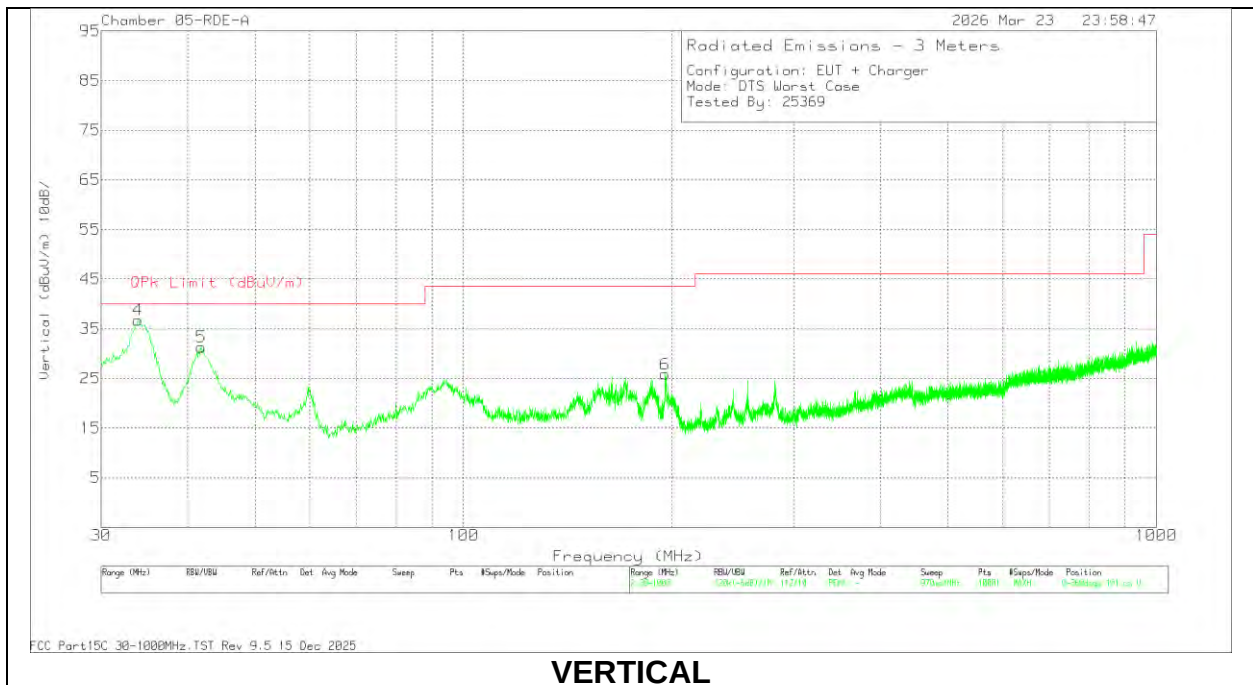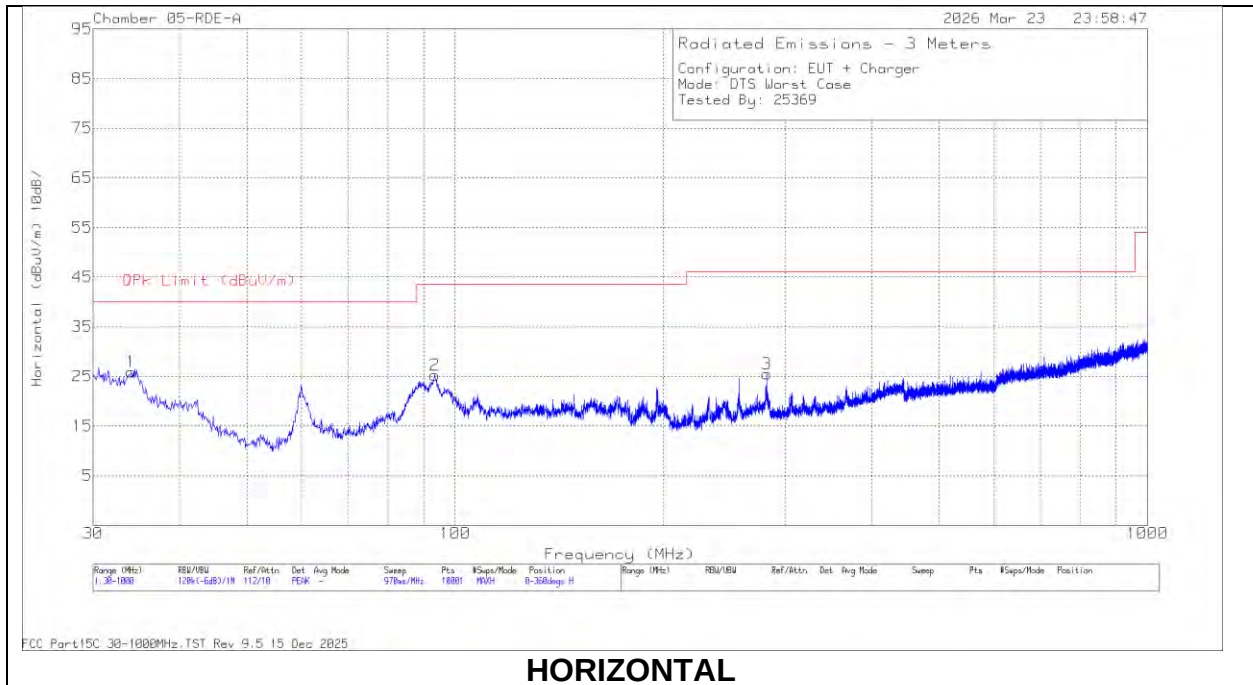

Radiated Emissions



Frequency (MHz)	Meter Reading (dBuV)	Det	204045 ACF (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 281.712	33.63	Qp	19.2	-30.6	22.23	46.02	-23.79	104	108	H
33.9769	41.18	Qp	24.1	-32.3	32.98	40	-7.02	208	112	V
34.3287	30.05	Qp	23.9	-32.3	21.65	40	-18.35	29	202	H
41.7672	42.81	Qp	18.4	-32.1	29.11	40	-10.89	264	104	V
93.0141	39.72	Qp	14.3	-31.8	22.22	43.52	-21.3	131	198	H
195.565	34.38	Qp	18.1	-31.2	21.28	43.52	-22.24	102	104	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Qp - Quasi-Peak detector

9.3. WORST CASE 18-26 GHz

State A

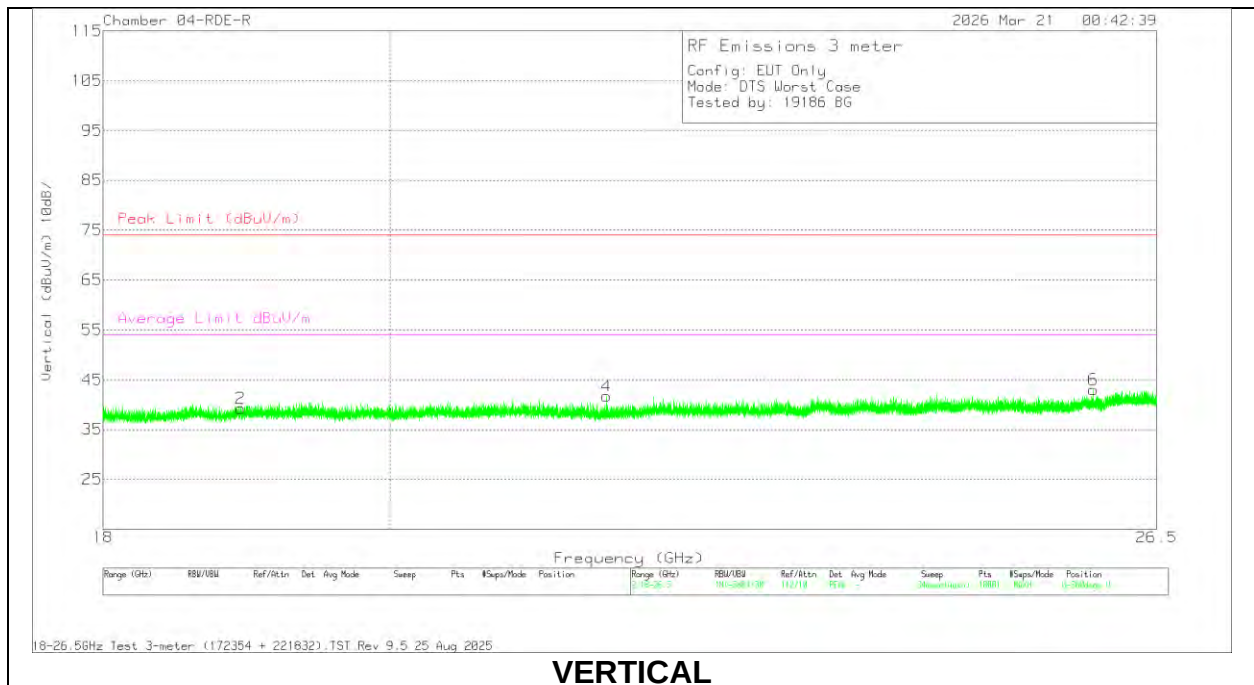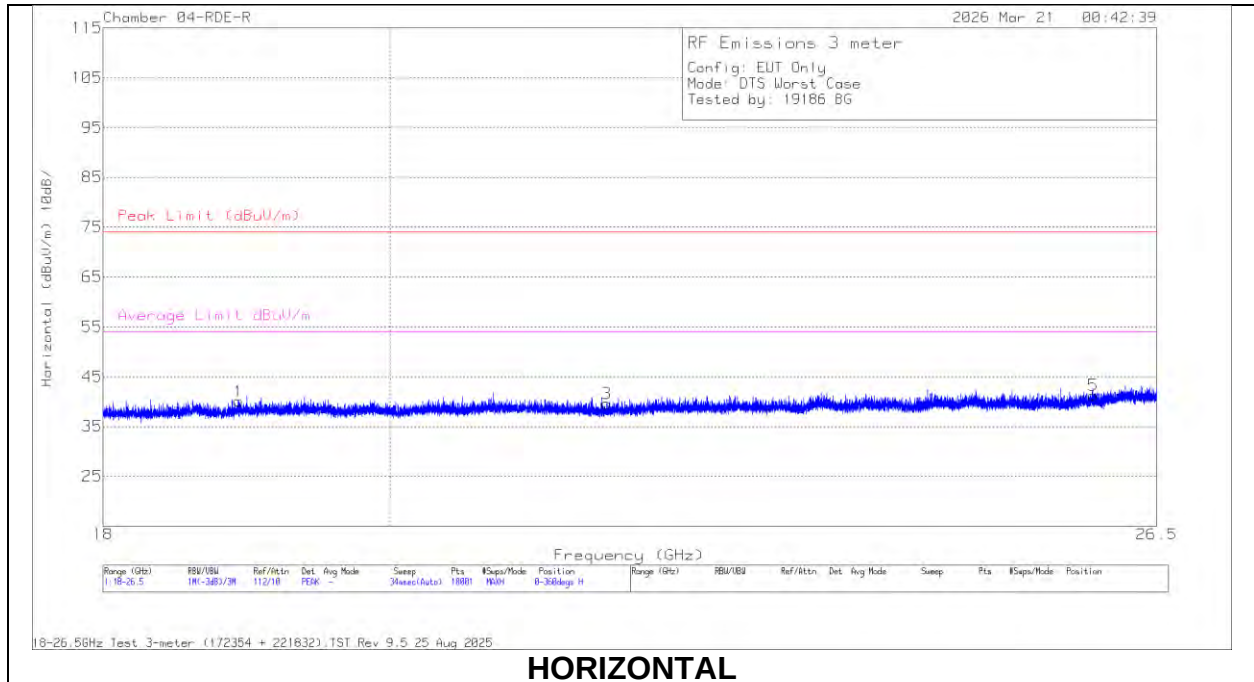

18 – 26GHz DATA

Radiated Emissions



Frequency (GHz)	Meter Reading (dBuV)	Det	172354 3m AF (dBm)	18-26GHz Amp	Cables (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Average Limit dBuV/m	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 18.91795	43.71	MAV1	32.4	-62.8	16	29.31	-	-	54	-24.69	360	100	H
* 18.919406	55.81	PK2	32.4	-62.8	16	41.41	74	-32.59	-	-	360	100	H
* 18.929314	55.93	PK2	32.4	-62.8	16	41.53	74	-32.47	-	-	360	100	V
* 18.932551	43.63	MAV1	32.4	-62.8	16	29.23	-	-	54	-24.77	360	100	V
21.650923	41.57	MAV1	32.9	-61.8	17	29.67	-	-	-	-	360	100	H
21.654926	41.69	MAV1	32.9	-61.8	17	29.79	-	-	-	-	360	100	V
21.654981	53.4	PK2	32.9	-61.8	17	41.5	-	-	-	-	360	100	H
21.658381	53.76	PK2	32.9	-61.8	17	41.86	-	-	-	-	360	100	V
25.888145	39.83	MAV1	33.9	-61.3	18.9	31.33	-	-	-	-	360	100	H
25.889838	51.61	PK2	33.9	-61.3	18.9	43.11	-	-	-	-	360	100	V
25.89042	39.85	MAV1	33.9	-61.3	18.9	31.35	-	-	-	-	360	100	V
25.891439	51.6	PK2	33.9	-61.3	18.9	43.1	-	-	-	-	360	100	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAV1 - KDB558074 Option 1 Maximum RMS Average

State B

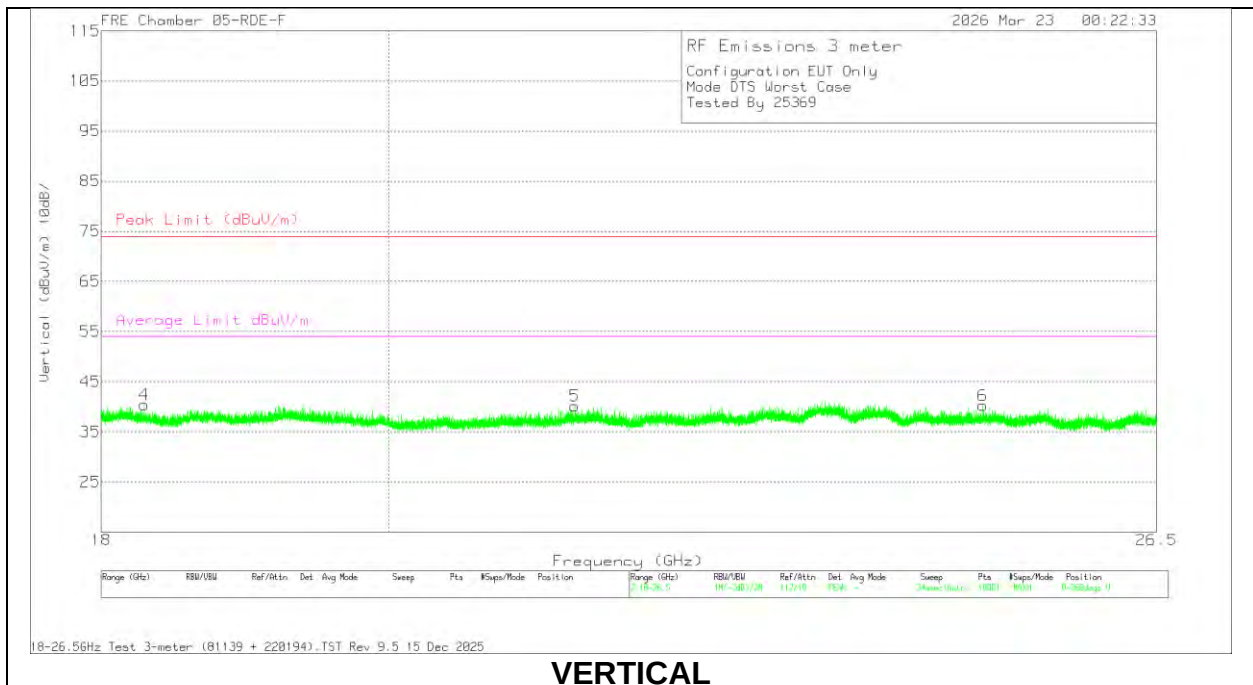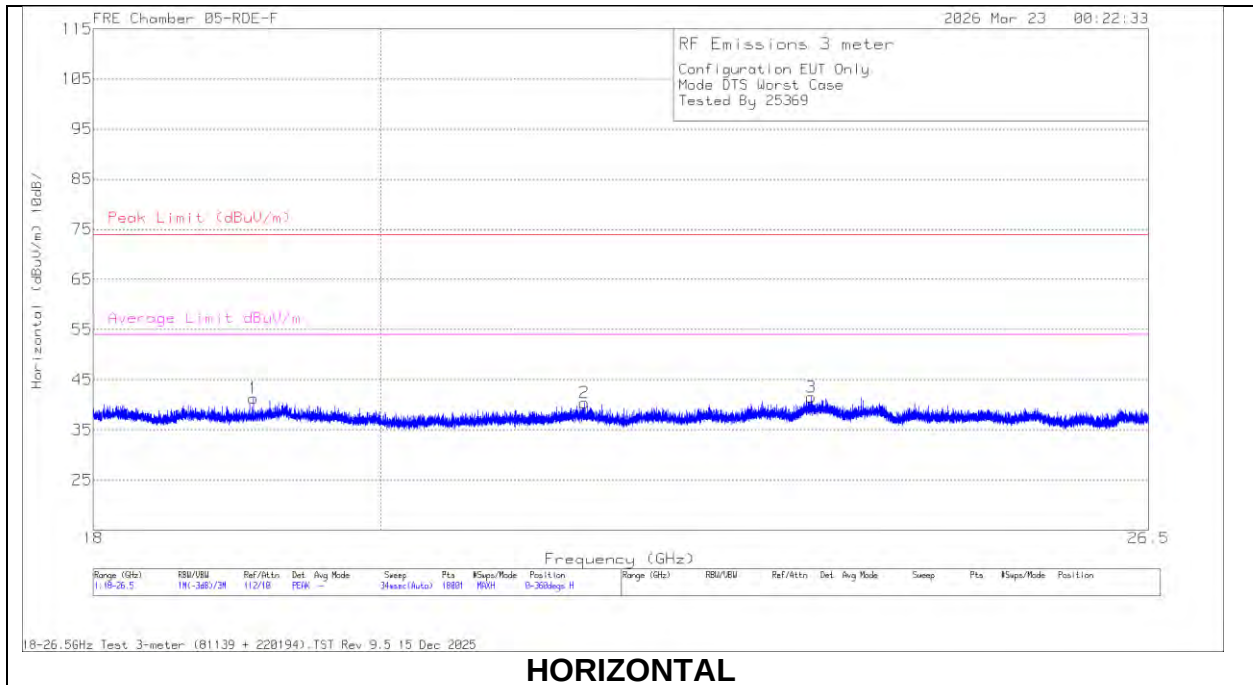

Radiated Emissions

Range 1: Horizontal 18 - 26.5GHz													
Frequency (GHz)	Meter Reading (dBuV)	Det	81139 ACF (dBm)	CBLIAMP (dB)	Cbl (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Average Limit dBuV/m	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 19.088797	57.22	PK2	32.5	-62.4	13.4	40.72	74	-33.28	-	-	360	101	H
* 19.08933	45.25	MAv1	32.5	-62.4	13.4	28.75	-	-	54	-25.25	360	101	H
21.55031	55.96	PK2	33.3	-62.4	14.1	40.96	74	-33.04	-	-	360	200	H
21.54883	44.14	MAv1	33.3	-62.4	14.1	29.14	-	-	54	-24.86	360	200	H
23.415092	56.86	PK2	33.6	-62.7	14.7	42.46	74	-31.54	-	-	360	200	H
23.418516	44.8	MAv1	33.6	-62.7	14.7	30.4	-	-	54	-23.6	360	200	H

Range 2: Vertical 18 - 26.5GHz													
Frequency (GHz)	Meter Reading (dBuV)	Det	81139 ACF (dB/m)	CBLIAMP (dB)	Cbl (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Average Limit dBuV/m	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 18.288045	57.63	PK2	32	-62.2	13.1	40.53	74	-33.47	-	-	360	101	V
* 18.290303	45.99	MAV1	32	-62.2	13.1	28.89	-	-	54	-25.11	360	101	V
21.417628	56.11	PK2	33.1	-62.3	14.1	41.01	74	-32.99	-	-	360	101	V
21.417624	44.15	MAV1	33.1	-62.3	14.1	29.05	-	-	54	-24.95	360	101	V
24.865728	54.67	PK2	33.8	-62.8	15.3	40.97	74	-33.03	-	-	360	199	V
24.86997	42.57	MAV1	33.8	-62.8	15.3	28.87	-	-	54	-25.13	360	199	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAV1 - KDB558074 Option 1 Maximum RMS Average

10. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 8.8

Frequency of Emission (MHz)	Conducted Limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

TEST PROCEDURE

ANSI C63.10, Subclause 6.2

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.


The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS


10.1. AC POWER LINE WITH AC/DC ADAPTER

LINE 1 RESULTS State B

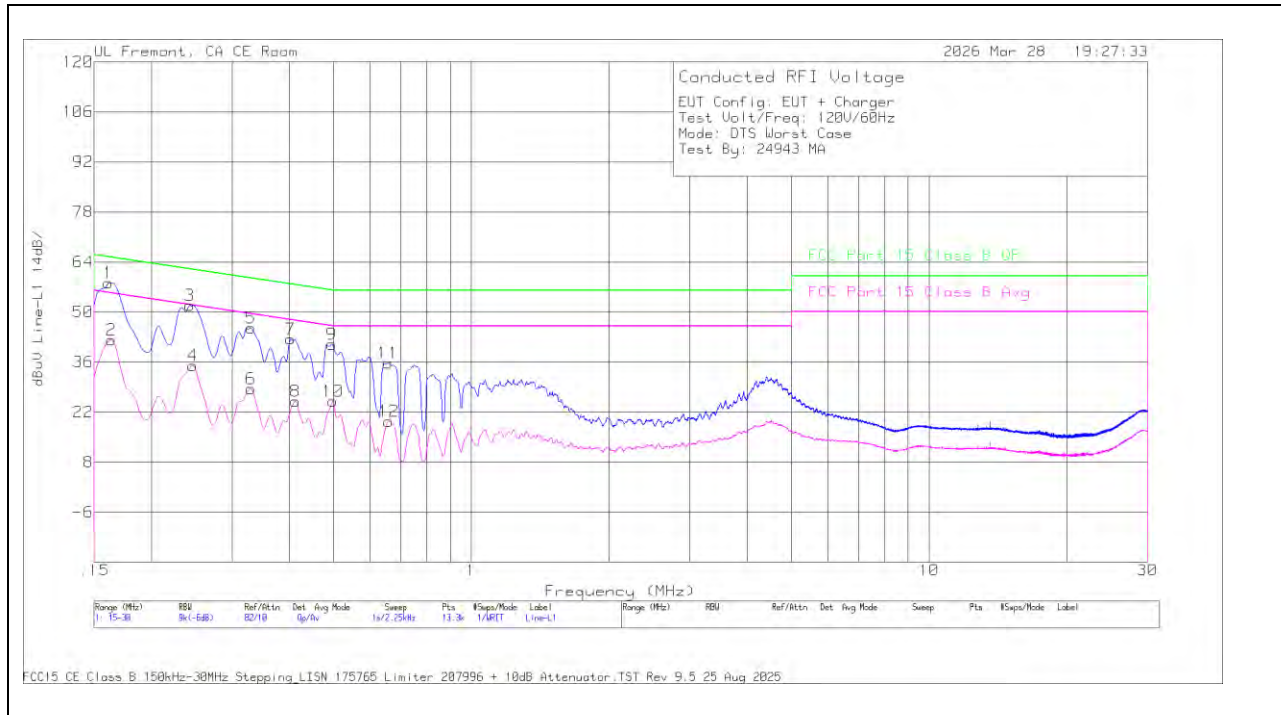

Range 1: Line-L1 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN (dB)	Line 1 C3_C1_plus Limiter (dB)	Attenuator (dB)	Corrected Reading (dBuV)	FCC Part 15 Class B QP (dBuV)	QP Margin (dB)	FCC Part 15 Class B Avg (dBuV)	Av Margin (dB)
2	.1658	21.42	Av	.1	9.4	9.9	40.82	-	-	55.17	-14.35
4	.249	15.06	Av	0	9.4	9.9	34.36	-	-	51.79	-17.43
6	.3323	8.94	Av	0	9.3	9.9	28.14	-	-	49.39	-21.25
8	.4155	6.26	Av	0	9.3	9.9	25.46	-	-	47.54	-22.08
10	.4988	7.03	Av	0	9.3	9.9	26.23	-	-	46.02	-19.79
12	.6664	1.4	Av	0	9.4	10	20.8	-	-	46	-25.2
1	.1658	37.37	Qp	.1	9.4	9.9	56.77	65.17	-8.4	-	-
3	.249	31.67	Qp	0	9.4	9.9	50.97	61.79	-10.82	-	-
5	.3323	25.84	Qp	0	9.3	9.9	45.04	59.39	-14.35	-	-
7	.4043	22.43	Qp	0	9.3	9.9	41.63	57.77	-16.14	-	-
9	.4988	21.83	Qp	0	9.3	9.9	41.03	56.02	-14.99	-	-
11	.6743	15.74	Qp	0	9.4	10	35.14	56	-20.86	-	-


LINE 2 RESULTS

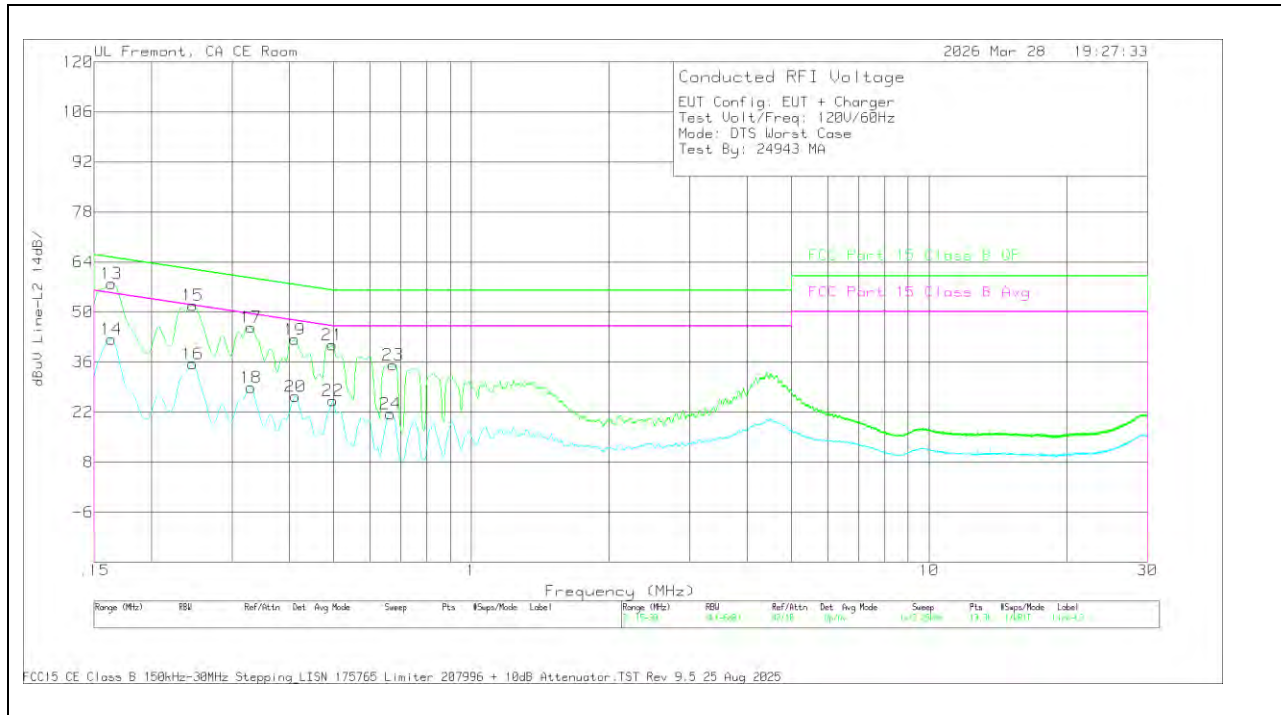

Range 2: Line-L2 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN (dB)	Line 1 C3_C1 plus Limiter (dB)	Attenuator (dB)	Corrected Reading (dBuV)	FCC Part 15 Class B QP (dBuV)	QP Margin (dB)	FCC Part 15 Class B Avg (dBuV)	Av Margin (dB)
14	.1658	21.97	Av	.1	9.4	9.9	41.37	-	-	55.17	-13.8
16	.249	15.36	Av	0	9.4	9.9	34.66	-	-	51.79	-17.13
18	.3323	9.3	Av	0	9.3	9.9	28.5	-	-	49.39	-20.89
20	.4155	6.27	Av	0	9.3	9.9	25.47	-	-	47.54	-22.07
22	.4988	7.25	Av	0	9.3	9.9	26.45	-	-	46.02	-19.57
24	.6641	.87	Av	0	9.4	10	20.27	-	-	46	-25.73
13	.1658	38.07	Qp	.1	9.4	9.9	57.47	65.17	-7.7	-	-
15	.249	32.18	Qp	0	9.4	9.9	51.48	61.79	-10.31	-	-
17	.3323	26.24	Qp	0	9.3	9.9	45.44	59.39	-13.95	-	-
19	.4043	22.95	Qp	0	9.3	9.9	42.15	57.77	-15.62	-	-
21	.4988	22.47	Qp	0	9.3	9.9	41.67	56.02	-14.35	-	-
23	.663	16.8	Qp	0	9.4	10	36.2	56	-19.8	-	-


10.2. AC POWER LINE WITH LAPTOP

State B

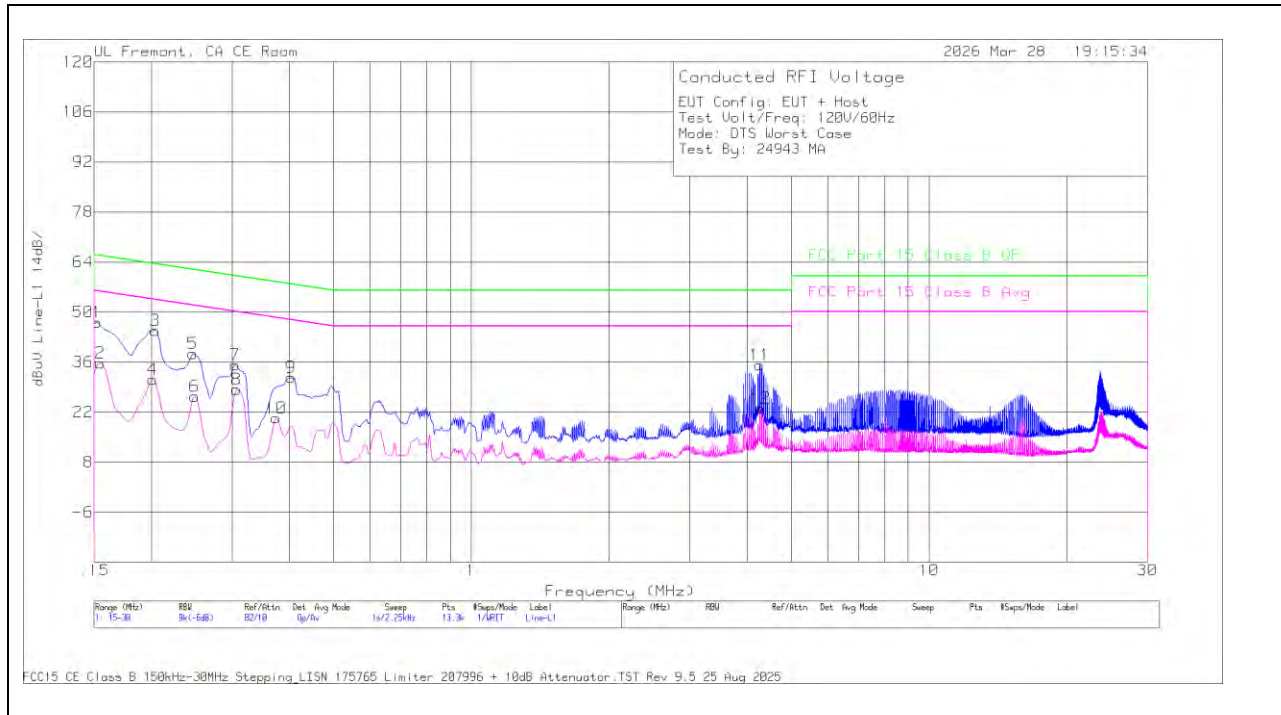LINE 1 RESULTS

Range 1: Line-L1 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN (dB)	Line 1 C3 C1 plus Limiter (dB)	Attenuator (dB)	Corrected Reading (dBuV)	FCC Part 15 Class B QP (dBuV)	QP Margin (dB)	FCC Part 15 Class B Avg (dBuV)	Av Margin (dB)
2	.2108	14.85	Av	0	9.4	9.9	34.15	-	-	53.18	-19.03
4	.3143	7.17	Av	0	9.3	9.9	26.37	-	-	49.86	-23.49
6	.4245	3.13	Av	0	9.3	9.9	22.33	-	-	47.36	-25.03
8	.5325	-1.55	Av	0	9.3	9.9	17.65	-	-	46	-28.35
10	1.122	-6.33	Av	0	9.4	9.9	12.97	-	-	46	-33.03
12	4.1235	2.71	Av	0	9.4	9.9	22.01	-	-	46	-23.99
1	.2108	25.43	Qp	0	9.4	9.9	44.73	63.18	-18.45	-	-
3	.3143	15.03	Qp	0	9.3	9.9	34.23	59.86	-25.63	-	-
5	.4245	12.18	Qp	0	9.3	9.9	31.38	57.36	-25.98	-	-
7	.5258	10.35	Qp	0	9.3	9.9	29.55	56	-26.45	-	-
9	1.0995	2.61	Qp	0	9.4	9.9	21.91	56	-34.09	-	-
11	4.0808	14.94	Qp	0	9.4	9.9	34.24	56	-21.76	-	-

LINE 2 RESULTS

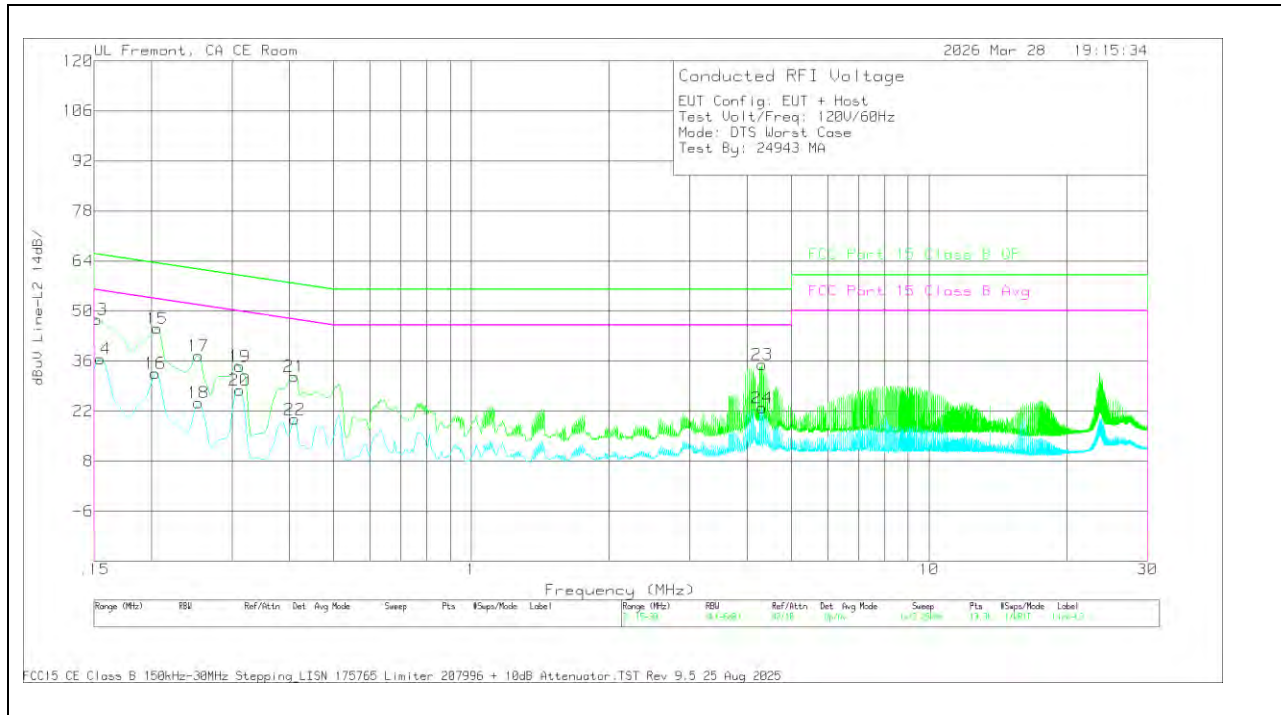

Range 2: Line-L2 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN (dB)	Line 1 C3_C1_plus Limiter (dB)	Attenuator (dB)	Corrected Reading (dBuV)	FCC Part 15 Class B QP (dBuV)	QP Margin (dB)	FCC Part 15 Class B Avg (dBuV)	Av Margin (dB)
14	.1545	17.19	Av	.1	9.4	9.9	36.59	-	-	55.75	-19.16
16	.204	13.29	Av	0	9.4	9.9	32.59	-	-	53.45	-20.86
18	.2535	4.97	Av	0	9.4	9.9	24.27	-	-	51.64	-27.37
20	.312	8.47	Av	0	9.4	9.9	27.77	-	-	49.92	-22.15
22	.411	.48	Av	0	9.3	9.9	19.68	-	-	47.63	-27.95
24	4.3125	3.65	Av	0	9.4	9.8	22.85	-	-	46	-23.15
13	.1523	28.28	Qp	.1	9.4	9.9	47.68	65.88	-18.2	-	-
15	.2063	25.8	Qp	0	9.4	9.9	45.1	63.35	-18.25	-	-
17	.2535	18.1	Qp	0	9.4	9.9	37.4	61.64	-24.24	-	-
19	.312	15.2	Qp	0	9.4	9.9	34.5	59.92	-25.42	-	-
21	.4099	12.37	Qp	0	9.4	9.9	31.67	57.65	-25.98	-	-
23	4.3125	15.87	Qp	0	9.4	9.8	35.07	56	-20.93	-	-