



SPOT CHECK TEST REPORT

Report Number: 16064943-E1V1

Applicant : APPLE, INC
1 APPLE PARK WAY
CUPERTINO, CA 95014, U.S.A.

Model : A3719, A3720, A3721

Brand : APPLE

FCC ID : BCG-E9198A, BCG-E9203A, BCG-9204A

EUT Description : SMARTPHONE

Test Standard(s) : FCC 47 CFR Part 2, Part 22, Part 24, Part 25, Part 27, Part 90,
and Part 96

Date Of Issue:
2026-07-16

Prepared by:
UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538, U.S.A.
TEL: (510) 319-4000
FAX: (510) 661-0888





Revision History

Rev.	Issue Date	Revisions	Revised By
V1	2026-07-16	Initial Review	--

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. DECISION RULES AND MEASUREMENT UNCERTAINTY	6
4.1. METROLOGICAL TRACEABILITY	6
4.2. DECISION RULES	6
4.3. MEASUREMENT UNCERTAINTY	6
4.4. SAMPLE CALCULATION	6
5. INTRODUCTION OF TEST DATA REUSE	7
5.1. DESCRIPTION OF EUT	7
5.2. INTRODUCTION	7
5.3. MODEL DIFFERENCES	7
5.4. SPOT CHECK VERIFICATION RESULTS SUMMARY FOR A3719	9
5.4.1. A3447 AND A3719 ANTENNA PORT DATA	9
5.5. SPOT CHECK VERIFICATION RESULTS SUMMARY FOR A3720	14
5.5.1. A3447 AND A3720 ANTENNA PORT DATA	14
5.6. SPOT CHECK VERIFICATION RESULTS SUMMARY FOR A3721	19
5.6.1. A3447 AND A3721 ANTENNA PORT DATA	19
5.6.2. A3447 AND A3721 BAND 26 (PART 22) RADIATED PLOTS AND DATA	24
5.7. REFERENCE DETAIL	28
5.8. SOFTWARE AND FIRMWARE	29
5.9. SPOT CHECK WORST-CASE CONFIGURATION AND MODE	29
5.10. DESCRIPTION OF TEST SETUP	29
6. TEST AND MEASUREMENT EQUIPMENT	31
Appendix A – Reference Test Report	32

1. ATTESTATION OF TEST RESULTS

Applicant Name and Address	APPLE, INC 1 APPLE PARK WAY CUPERTINO, CA 95014, U.S.A.
Model	A3719, A3720, A3721
Brand	APPLE
FCC ID	BCG-E9198A, BCG-E9203A, BCG-9204A
EUT Description	SMARTPHONE
Serial Number	MODEL (A3719):C07HTU000AE0001B56 (CONDUCTED) and CXNYP92621 (RADIATED) MODEL (A3720):C07HTH0059H0001B57 (CONDUCTED) and LK7YPYTXF7 (RADIATED) MODEL (A3721):C07HTG001XT0001P0U (CONDUCTED) and G3FCQ391K2 (RADIATED)
Sample Receipt Date	2026-06-17
Date Tested	2026-06-18 to 2026-07-13
Applicable Standards	FCC 47 CFR Part 2, Part 22, Part 24, Part 25, Part 27, Part 90, and Part 96
Test Results	COMPLIES
UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report. The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document.	
Approved & Released By:	Prepared and Reviewed By:
	
Mengistu Mekuria Staff Engineer UL Verification Services Inc.	Andrew Le Laboratory Supervisor UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with the following:

- ANSI C63.26:2015
- ANSI/TIA-603-E (2016)
- FCC 47 CFR Part 2, Part 22, Part 24, Part 25, Part 27, Part 90, and Part 96
- [FCC KDB 971168 D01 v03r01](#): Power Meas License Digital Systems
- [FCC KDB 971168 D02 v02r01](#): Misc Rev Approv License Devices
- [FCC KDB 484596 D01 v03](#): Referencing Test Data

3. FACILITIES AND ACCREDITATION

UL Verification Services Inc. is accredited by A2LA, certification #0751.05, for all testing performed within the scope of this report. Testing was performed at the locations noted below.

	Address	ISED CABID	ISED Company Number	FCC Registration
☒	Building 1: 47173 Benicia Street, Fremont, CA 94538, USA	US0104	2324A	550739
☐	Building 2: 47266 Benicia Street, Fremont, CA 94538, USA			
☒	Building 3: 843 Auburn Court, Fremont, CA 94538, USA			
☐	Building 4: 47658 Kato Rd, Fremont, CA 94538, USA			
☒	Building 5: 47670 Kato Rd, Fremont, CA 94538, USA			

4. DECISION RULES AND MEASUREMENT UNCERTAINTY

4.1. METROLOGICAL TRACEABILITY

All test and measuring equipment utilized to perform the tests documented in this report are calibrated on a regular basis, with a maximum time between calibrations of one year or the manufacturers' recommendation, whichever is less, and where applicable is traceable to recognized national standards.

4.2. DECISION RULES

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4:2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	U _{Lab}
Conducted Antenna Port Emission Measurement	1.940 dB
Power Spectral Density	2.466 dB
RF Power Measurement Direct Method Using Power Meter	0.450 dB Ave. 1.300 dB Peak
Radio Frequency (Spectrum Analyzer)	141.16 Hz
Occupied Bandwidth	1.22%
Worst Case Conducted Disturbance, 9KHz to 0.15 MHz	3.78 dB
Worst Case Conducted Disturbance, 0.15 to 30 MHz	3.40 dB
Worst Case Radiated Disturbance, 9KHz to 30 MHz	2.87 dB
Worst Case Radiated Disturbance, 30 to 1000 MHz	6.01 dB
Worst Case Radiated Disturbance, 1000 to 18000 MHz	4.73 dB
Worst Case Radiated Disturbance, 18000 to 26000 MHz	4.51 dB
Worst Case Radiated Disturbance, 26000 to 40000 MHz	5.29 dB

Uncertainty figures are valid to a confidence level of 95%.

4.4. SAMPLE CALCULATION

RADIATED EMISSIONS

Where relevant, the following sample calculation is provided:

Field Strength (dBuV/m) = Measured Voltage (dBuV) + Antenna Factor (dB/m) + Cable Loss (dB) – Preamp Gain (dB)
36.5 dBuV + 18.7 dB/m + 0.6 dB – 26.9 dB = 28.9 dBuV/m

5. INTRODUCTION OF TEST DATA REUSE

5.1. DESCRIPTION OF EUT

The Apple iPhone is a smartphone (Foldable) with cellular GSM, GPRS, EGPRS, WCDMA, LTE, 5G NR1, 5G NR2, IEEE 802.11a/b/g/n/ac/ax/be, Bluetooth (BT), Ultra-Wideband (UWB), Global Positioning System (GPS), Near-Field Communication (NFC), Narrow-Band (NB) UNII, 802.15.4, 802.15.4ab-Narrow Band (NB), Wireless Power Transfer (WPT) and Mobile Satellite Service (MSS) technologies. The rechargeable battery is not user accessible. This device is not user-serviceable and requires special tools to disassemble. The system uses a hinge mechanism, which allows the device to open and close smoothly, allowing for the display to be secured across angular range. Figure 1 illustrates the folding orientation and defined operating states. State A is when the device is fully closed. State B is when the device is fully open.

Testing was performed on the parent model and is used to support the application for the parent and variants identified in this report based on the test plan submitted and approved via KDB inquiry by the FCC.

5.2. INTRODUCTION

This application for certification is leveraging the data reuse procedures from KDB 484596 D01 based on reference FCC ID: BCG-E9188A to cover variant models FCC ID: BCG-E9198A, FCC ID BCG-E9203A, and FCC ID BCG-E9204A. The major difference between the parent/reference model and the variant models are the depopulation of some LTE and 5G NR Bands. All other circuitry and features are identical. The data reuse test plan was approved via manufacturer KDB inquiry.

5.3. MODEL DIFFERENCES

The manufacturer hereby declares the following for models A3447, A3719, A3720, and A3721.

These models are highly similar, with the only difference being the supported cellular bands.

Model	FCC ID	Feature Difference	Sim Support	Reference Model
A3447	BCG-E9188A	with FR2 -No B11/21 -With UL MIMO (n41/48/77)	eSIM	Reference
A3719	BCG-E9198A	without FR2 -Added B11, 21 -With UL MIMO (n41/48/77)	eSIM	A3447
A3720	BCG-E9203A	without FR2 -No B14, B29, B71, B11, 21 -With UL MIMO (n41/48/77)	eSIM	
A3721	BCG-E9204A	without FR2 -No B14, B29, B53, B71, B11, 21 -With UL MIMO (n41/77/78) -No MSS	eSIM	

Note:

They have the same PCB layout, design, common components, antennas, antenna locations and housing cases.

More specifically, their cellular modem, Wi-Fi, BT, NFC, WPT and UWB transmitters are identical, and removal of cellular bands is done by software and depopulation of band-specific components associated with the removed bands.

Spot check verification has been done on models A3719, A3720 and A3721 in accordance with the test plan approved via

KDB inquiry. Spot checks were performed for conducted output power in all bands and radiated spurious emissions on selected bands representing bands below 1GHz, in the range 1 - 2GHz, in the range 2 - 3GHz and above 3GHz. For data referencing the criteria from KDB 484596 D01 v03 equation (4).

For EMC compliance test data (e.g., spurious emissions limits), the deviation between the variant and the parent model, for both field and power quantities, is expressed as:

$$d_{dB} = |V_{dB} - R_{dB}| \quad (1),$$

where V_{dB} is the variant spot-check level in dB, and R_{dB} is the corresponding reference measurement level in dB for the parent model.

The spot-check will be deemed acceptable when:

$$d_{dB} \leq d_{dBmax} \quad (2),$$

where d_{dBmax} is the maximum deviation d_{dB} allowed for the EMC data for the spot-check to be considered acceptable. The definition of d_{dBmax} is based on “how far” the reference data R_{dB} is from the compliance threshold C_{dB} (also expressed in dB), for the test under consideration. More specifically, if M_{dB} is the margin in dB from the compliance limit, expressed as

$$M_{dB} = |C_{dB} - R_{dB}| \quad (3),$$

then d_{dBmax} is defined as a function of M_{dB} , which increases linearly from 3 dB to 6 dB (Fig. 2), according to:

$$d_{dBmax}(M_{dB}) = \begin{cases} (3 + M_{dB}/20) \text{ dB} & , \text{ for } 0 \leq M_{dB} \leq 60 \text{ dB} \\ 6 \text{ dB} & , \text{ for } M_{dB} > 60 \text{ dB} \end{cases} \quad (4).$$

The meaning of eq. (4) can be expressed as follows:

- For $M_{dB} = 0$ dB, then $d_{dB} \leq 3$ dB: $M_{dB} = 0$ dB $\Rightarrow R_{dB} = C_{dB}$, which represents the limiting case when R_{dB} is exactly at the compliance threshold C_{dB} ; according to (4) the variant level V_{dB} cannot be more than 3 dB away from the reference level R_{dB} , but in this case, it can only be lower than R_{dB} . Any value greater than R_{dB} would be out of compliance since $R_{dB} = C_{dB}$.
- As the compliance margin M_{dB} becomes larger than 0, a more “forgiving” d_{dB} (larger than 3 dB but always less than 6dB) is allowed. Additionally, the variant level V_{dB} can exceed the reference level R_{dB} , but it will still be limited by the compliance level C_{dB} .
- For $M_{dB} > 60$ dB, then $d_{dB} = 6$ dB: Here, the reference data is 60 dB below the compliance threshold C_{dB} . This is typically the case when the measurements are approaching the noise floor level. For this reason, the difference d_{dB} is allowed to be up to 6 dB. However, no further increase beyond $d_{dB} = 6$ dB, is allowed, even for larger margins. In other words, even if $M_{dB} = 80$ dB, the maximum allowed difference d_{dB} will still be 6 dB.

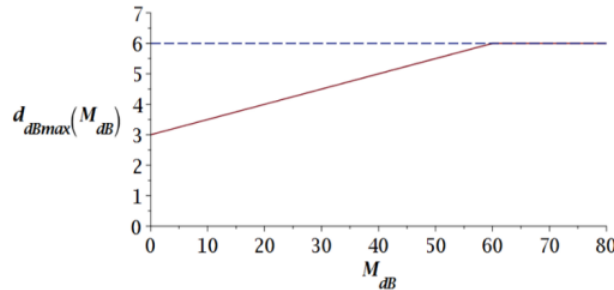


Figure 2. The piecewise linear function for d_{dBmax} , which represents the maximum allowed d_{dB} , as given by eq. (4). The spot-check is acceptable when the deviation d_{dB} is below the d_{dBmax} curve.

5.4. SPOT CHECK VERIFICATION RESULTS SUMMARY FOR A3719

5.4.1. A3447 AND A3719 ANTENNA PORT DATA

State A

A3719 SPOT CHECK RESULTS							
Technology	Worst Mode	Test Item	Measured	Original Model: A3447	Sub Model: A3719	Delta (dB)	Remarks
			Frequency MHz	FCC ID :BCG-E9188A (dBm)	FCC ID: BCG-E9198A (dBm)		
GSM	GPRS 850	Cond Power	836.6	33.50	33.13	-0.37	
	GPRS 1900	Cond Power	1909.8	32.00	32.00	0.00	
WCDMA	REL99 B5	Cond Power	826.4	25.70	25.70	0.00	
	REL99 B2	Cond Power	1880.0	25.70	25.70	0.00	
	REL99 B4	Cond Power	1712.4	25.70	25.70	0.00	

State B

A3719 SPOT CHECK RESULTS							
Technology	Worst Mode	Test Item	Measured	Original Model: A3447	Sub Model: A3719	Delta (dB)	Remarks
			Frequency MHz	FCC ID :BCG-E9188A (dBm)	FCC ID: BCG-E9198A (dBm)		
GSM	GPRS 850	Cond Power	836.6	33.50	33.13	-0.37	
	GPRS 1900	Cond Power	1909.8	32.00	32.00	0.00	
WCDMA	REL99 B5	Cond Power	826.4	25.70	25.70	0.00	
	REL99 B2	Cond Power	1880.0	25.70	25.70	0.00	
	REL99 B4	Cond Power	1712.4	25.70	25.70	0.00	

State A

A3719 Spot Check Results							
Technology	Worst Mode	Test Item	Measured	Original Model: A3447	Sub Model: A3719	Delta (dB)	Remarks
			Frequency (MHz)	FCC ID :BCG-E9188A (dBm)	FCC ID: BCG-E9198A (dBm)		
LTE 5CA	QPSK @ 10MHz+10MHz BW	Cond Power	831.4/844	25.70	25.70	0.00	
LTE 7CA	QPSK @ 20MHz+20MHz BW	Cond Power	2525.1/2544.9	25.70	25.70	0.00	
LTE 41CA	QPSK @ 20MHz+20MHz BW	Cond Power	2583.1/2602.9	28.70	28.70	0.00	
LTE 48CA	QPSK @ 20MHz+20MHz BW	Cond Power	3615.1/3634.9	25.00	25.00	0.00	

State B

A3719 Spot Check Results							
Technology	Worst Mode	Test Item	Measured	Original Model: A3447	Sub Model: A3719	Delta (dB)	Remarks
			Frequency (MHz)	FCC ID :BCG-E9188A (dBm)	FCC ID: BCG-E9198A (dBm)		
LTE 5CA	QPSK @ 10MHz+10MHz BW	Cond Power	831.4/844	25.70	25.70	0.00	
LTE 7CA	QPSK @ 20MHz+20MHz BW	Cond Power	2525.1/2544.9	25.70	25.70	0.00	
LTE 41CA	QPSK @ 20MHz+20MHz BW	Cond Power	2583.1/2602.9	28.70	28.70	0.00	
LTE 48CA	QPSK @ 20MHz+20MHz BW	Cond Power	3615.1/3634.9	24.20	24.20	0.00	

State A

A3719 SPOT CHECK RESULTS							
Technology	Worst Mode	Test Item	Measured	Original Model: A3447	Sub Model: A3719	Delta (dB)	Remarks
			Frequency (MHz)	FCC ID :BCG-E9188A (dBm)	FCC ID: BCG-E9198A (dBm)		
LTE BAND 7	QPSK @ 20 MHz BW	Cond Power	2535	25.70	25.70	0	
5G NR BAND N7	BPSK @ 40 MHz BW	Cond Power	2535	25.70	25.70	0	
LTE BAND 12	QPSK @ 10 MHz BW	Cond Power	707.5	25.70	25.70	0	
5G NR BAND N12	BPSK @ 15 MHz BW	Cond Power	707.5	25.70	25.70	0	
LTE BAND 13	QPSK @ 10 MHz BW	Cond Power	782.0	25.70	25.70	0	
LTE BAND 14	QPSK @ 10 MHz BW	Cond Power	793.0	25.70	25.70	0	
5G NR BAND N14	BPSK @ 10 MHz BW	Cond Power	793.0	25.70	25.70	0	
LTE BAND 17	QPSK @ 10 MHz BW	Cond Power	710.0	25.70	25.70	0	
LTE BAND 25	QPSK @ 20 MHz BW	Cond Power	1882.5	25.70	25.70	0	
5G NR BAND N25	BPSK @ 40 MHz BW	Cond Power	1870.0	25.70	25.70	0	
LTE BAND 26 (90S)	QPSK @10 MHz BW	Cond Power	819.0	25.70	25.70	0	
5G NR BAND N26 (90S)	BPSK @10 MHz BW	Cond Power	819.0	25.70	25.70	0	
LTE BAND 26 (P22)	QPSK @ 10 MHz BW	Cond Power	836.5	25.70	25.70	0	
5G NR BAND N26 (P22)	BPSK @20 MHz BW	Cond Power	836.5	25.70	25.70	0	
LTE BAND 30	QPSK @ 10 MHz BW	Cond Power	2310.0	25.00	25.00	0	
5G NR BAND N30	BPSK @ 10 MHz BW	Cond Power	2310.0	25.00	25.00	0	
LTE BAND 41	QPSK @ 20 MHz BW	Cond Power	2593.0	28.70	28.70	0	
5G NR BAND N41	BPSK @ 100 MHz BW	Cond Power	2593.0	28.70	28.70	0	
LTE BAND 48	QPSK @ 20 MHz BW	Cond Power	3625.0	26.00	26.00	0	
5G NR BAND N48	BPSK @ 40 MHz BW	Cond Power	3620.0	26.00	26.00	0	
LTE BAND 53	QPSK @ 10 MHz BW	Cond Power	2489.0	20.70	20.70	0	
5G NR BAND N53	BPSK @ 10 MHz BW	Cond Power	2489.0	20.70	20.70	0	
LTE BAND 66	QPSK @ 20 MHz BW	Cond Power	1745.0	25.70	25.70	0	
5G NR BAND N66	BPSK @ 40 MHz BW	Cond Power	1730.0	25.70	25.70	0	
5G NR BAND n70	QPSK @ 15 MHz BW	Cond Power	1702.5	25.70	25.70	0	
LTE BAND 71	QPSK @ 20 MHz BW	Cond Power	683.0	25.70	25.70	0	
5G NR BAND n71	BPSK @ 20 MHz BW	Cond Power	673.0	25.70	25.70	0	
5G NR BAND N77	BPSK @ 100 MHz BW	Cond Power	3500.0	29.00	29.00	0	
5G NR BAND N77	BPSK @ 100 MHz BW	Cond Power	3840.0	29.00	29.00	0	
LTE BAND 106	QPSK @ 3 MHz BW	Cond Power	899.0	25.70	25.70	0	

State B

A3719 SPOT CHECK RESULTS							
Technology	Worst Mode	Test Item	Measured	Original Model: A3447	Sub Model: A3719	Delta (dB)	Remarks
			Frequency (MHz)	FCC ID :BCG-E9188A (dBm)	FCC ID: BCG-E9198A (dBm)		
LTE BAND 7	QPSK @ 20 MHz BW	Cond Power	2535	25.70	25.70	0	
5G NR BAND N7	BPSK @ 40 MHz BW	Cond Power	2535	25.70	25.70	0	
LTE BAND 12	QPSK @ 10 MHz BW	Cond Power	707.5	25.70	25.70	0	
5G NR BAND N12	BPSK @ 15 MHz BW	Cond Power	707.5	25.70	25.70	0	
LTE BAND 13	QPSK @ 10 MHz BW	Cond Power	782.0	25.70	25.70	0	
LTE BAND 14	QPSK @ 10 MHz BW	Cond Power	793.0	25.70	25.70	0	
5G NR BAND N14	BPSK @ 10 MHz BW	Cond Power	793.0	25.70	25.70	0	
LTE BAND 17	QPSK @ 10 MHz BW	Cond Power	710.0	25.70	25.70	0	
LTE BAND 25	QPSK @ 20 MHz BW	Cond Power	1882.5	25.70	25.70	0	
5G NR BAND N25	BPSK @ 40 MHz BW	Cond Power	1870.0	25.70	25.70	0	
LTE BAND 26 (90S)	QPSK @10 MHz BW	Cond Power	819.0	25.70	25.70	0	
5G NR BAND N26 (90S)	BPSK @10 MHz BW	Cond Power	819.0	25.70	25.70	0	
LTE BAND 26 (P22)	QPSK @ 10 MHz BW	Cond Power	836.5	25.70	25.70	0	
5G NR BAND N26 (P22)	BPSK @20 MHz BW	Cond Power	836.5	25.70	25.70	0	
LTE BAND 30	QPSK @ 10 MHz BW	Cond Power	2310.0	24.70	24.70	0	
5G NR BAND N30	BPSK @ 10 MHz BW	Cond Power	2310.0	24.70	24.70	0	
LTE BAND 41	QPSK @ 20 MHz BW	Cond Power	2593.0	28.70	28.70	0	
5G NR BAND N41	BPSK @ 100 MHz BW	Cond Power	2593.0	28.70	28.70	0	
LTE BAND 48	QPSK @ 20 MHz BW	Cond Power	3625.0	24.20	24.20	0	
5G NR BAND N48	BPSK @ 40 MHz BW	Cond Power	3620.0	24.20	24.20	0	
LTE BAND 53	QPSK @ 10 MHz BW	Cond Power	2489.0	20.70	20.70	0	
5G NR BAND N53	BPSK @ 10 MHz BW	Cond Power	2489.0	20.70	20.70	0	
LTE BAND 66	QPSK @ 20 MHz BW	Cond Power	1745.0	25.70	25.70	0	
5G NR BAND N66	BPSK @ 40 MHz BW	Cond Power	1730.0	25.70	25.70	0	
5G NR BAND n70	QPSK @ 15 MHz BW	Cond Power	1702.5	25.70	25.70	0	
LTE BAND 71	QPSK @ 20 MHz BW	Cond Power	683.0	25.70	25.70	0	
5G NR BAND n71	BPSK @ 20 MHz BW	Cond Power	673.0	25.70	25.70	0	
5G NR BAND N77	BPSK @ 100 MHz BW	Cond Power	3500.0	29.00	29.00	0	
5G NR BAND N77	BPSK @ 100 MHz BW	Cond Power	3840.0	29.00	29.00	0	
LTE BAND 106	QPSK @ 3 MHz BW	Cond Power	899.0	25.70	25.70	0	

State A

A3719 SPOT CHECK RESULTS								
Technology	Worst Mode	Test Item	Measured	Original Model: A3447	Sub Model: A3719	Delta (dB)	Margin (dB)	Remarks
			Frequency (MHz)	FCC ID :BCG-E9188A (dBm)	FCC ID: BCG-E9198A (dBm)		M(dB)=C(dB)-R(dB)	
LTE BAND 7	QPSK @ highest BW	RSE	2560.0	-46.03	-48.03	-2.00	21.03	Note 1
LTE BAND 25	QPSK @ highest BW	RSE	1905.0	-49.86	-52.49	-2.63	36.86	Note 1
LTE BAND 26 (P22)	QPSK @ highest BW	RSE	844.0	-52.70	-54.79	-2.09	39.70	Note 3
LTE BAND 48	QPSK @ 20 MHz BW	RSE	3560.0	-49.85	-51.76	-1.91	9.85	Note 1

Note 1: Deviation is within the threshold to allow for full data referencing.

Note 2: Noise floor measurement.

Note 3: Deviation is larger then the threshold to allow for data referencing. As the full test for this band had significant margin to the limits (typically more than 20dB but always more than 15dB) additional tests for other bands were not considered necessary.Full set of measurements performed

State B

A3719 SPOT CHECK RESULTS								
Technology	Worst Mode	Test Item	Measured	Original Model: A3447	Sub Model: A3719	Delta (dB)	Margin (dB)	Remarks
			Frequency (MHz)	FCC ID :BCG-E9188A (dBm)	FCC ID: BCG-E9198A (dBm)		M(dB)=C(dB)-R(dB)	
LTE BAND 7	QPSK @ highest BW	RSE	2560.0	-48.58	-49.90	-1.32	23.58	Note 1
LTE BAND 25	QPSK @ highest BW	RSE	1905.0	-51.39	-50.96	0.43	38.39	Note 1
LTE BAND 26 (P22)	QPSK @ highest BW	RSE	844.0	-52.03	-53.90	-1.87	39.03	Note 3
LTE BAND 48	QPSK @ 20 MHz BW	RSE	3560.0	-49.26	-50.20	-0.94	9.26	Note 1

Note 1: Deviation is within the threshold to allow for full data referencing.

Note 2: Noise floor measurement.

Note 3: Deviation is larger then the threshold to allow for data referencing. As the full test for this band had significant margin to the limits (typically more than 20dB but always more than 15dB) additional tests for other bands were not considered necessary.Full set of measurements performed

5.5. SPOT CHECK VERIFICATION RESULTS SUMMARY FOR A3720

5.5.1. A3447 AND A3720 ANTENNA PORT DATA

State A

A3720 SPOT CHECK RESULTS							
Technology	Worst Mode	Test Item	Measured	Original Model: A3447	Sub Model: A3720	Delta (dB)	Remarks
			Frequency MHz	FCC ID :BCG-E9198A (dBm)	FCC ID: BCG-E9203A (dBm)		
GSM	GPRS 850	Cond Power	836.6	33.50	33.50	0.00	
	GPRS 1900	Cond Power	1909.8	32.00	32.00	0.00	
WCDMA	REL99 B5	Cond Power	826.4	25.70	25.70	0.00	
	REL99 B2	Cond Power	1880.0	25.70	25.70	0.00	
	REL99 B4	Cond Power	1712.4	25.70	25.70	0.00	

State B

A3720 SPOT CHECK RESULTS							
Technology	Worst Mode	Test Item	Measured	Original Model: A3447	Sub Model: A3720	Delta (dB)	Remarks
			Frequency MHz	FCC ID :BCG-E9198A (dBm)	FCC ID: BCG-E9203A (dBm)		
GSM	GPRS 850	Cond Power	836.6	33.50	33.50	0.00	
	GPRS 1900	Cond Power	1909.8	32.00	32.00	0.00	
WCDMA	REL99 B5	Cond Power	826.4	25.70	25.70	0.00	
	REL99 B2	Cond Power	1880.0	25.70	25.70	0.00	
	REL99 B4	Cond Power	1712.4	25.70	25.70	0.00	

State A

A3720 Spot Check Results							
Technology	Worst Mode	Test Item	Measured	Original Model: A3447	Sub Model: A3720	Delta (dB)	Remarks
			Frequency (MHz)	FCC ID :BCG-E9188A (dBm)	FCC ID: BCG-E9203A (dBm)		
LTE 5CA	QPSK @ 10MHz+10MHz BW	Cond Power	831.4/844	25.70	25.70	0.00	
LTE 7CA	QPSK @ 20MHz+20MHz BW	Cond Power	2525.1/2544.9	25.70	25.70	0.00	
LTE 41CA	QPSK @ 20MHz+20MHz BW	Cond Power	2583.1/2602.9	28.70	28.70	0.00	
LTE 48CA	QPSK @ 20MHz+20MHz BW	Cond Power	3615.1/3634.9	25.00	25.00	0.00	

State B

A3720 Spot Check Results							
Technology	Worst Mode	Test Item	Measured	Original Model: A3447	Sub Model: A3720	Delta (dB)	Remarks
			Frequency (MHz)	FCC ID :BCG-E9188A (dBm)	FCC ID: BCG-E9203A (dBm)		
LTE 5CA	QPSK @ 10MHz+10MHz BW	Cond Power	831.4/844	25.70	25.70	0.00	
LTE 7CA	QPSK @ 20MHz+20MHz BW	Cond Power	2525.1/2544.9	25.70	25.70	0.00	
LTE 41CA	QPSK @ 20MHz+20MHz BW	Cond Power	2583.1/2602.9	28.70	28.70	0.00	
LTE 48CA	QPSK @ 20MHz+20MHz BW	Cond Power	3615.1/3634.9	24.20	24.20	0.00	

State A

A3720 SPOT CHECK RESULTS							
Technology	Worst Mode	Test Item	Measured	Original Model: A3447	Sub Model: A3720	Delta (dB)	Remarks
			Frequency (MHz)	FCC ID :BCG-E9188A (dBm)	FCC ID: BCG-E9203A (dBm)		
LTE BAND 7	QPSK @ 20 MHz BW	Cond Power	2535.0	25.70	25.70	0	
5G NR BAND N7	BPSK @ 40 MHz BW	Cond Power	2535.0	25.70	25.70	0	
LTE BAND 12	QPSK @ 10 MHz BW	Cond Power	707.5	25.70	25.70	0	
5G NR BAND N12	BPSK @ 15 MHz BW	Cond Power	707.5	25.70	25.70	0	
LTE BAND 13	QPSK @ 10 MHz BW	Cond Power	782.0	25.70	25.70	0	
LTE BAND 17	QPSK @ 10 MHz BW	Cond Power	710.0	25.70	25.70	0	
LTE BAND 25	QPSK @ 20 MHz BW	Cond Power	1882.5	25.70	25.70	0	
5G NR BAND N25	BPSK @ 40 MHz BW	Cond Power	1870.0	25.70	25.70	0	
LTE BAND 26 (90S)	QPSK @10 MHz BW	Cond Power	819.0	25.70	25.70	0	
5G NR BAND N26 (90S)	BPSK @10 MHz BW	Cond Power	819.0	25.70	25.70	0	
LTE BAND 26 (P22)	QPSK @ 10 MHz BW	Cond Power	836.5	25.70	25.70	0	
5G NR BAND N26 (P22)	BPSK @20 MHz BW	Cond Power	836.5	25.70	25.70	0	
LTE BAND 30	QPSK @ 10 MHz BW	Cond Power	2310.0	25.00	25.00	0	
5G NR BAND N30	BPSK @ 10 MHz BW	Cond Power	2310.0	25.00	25.00	0	
LTE BAND 41	QPSK @ 20 MHz BW	Cond Power	2593.0	28.70	28.70	0	
5G NR BAND N41	BPSK @ 100 MHz BW	Cond Power	2593.0	28.70	28.70	0	
LTE BAND 48	QPSK @ 20 MHz BW	Cond Power	3625.0	26.00	26.00	0	
5G NR BAND N48	BPSK @ 40 MHz BW	Cond Power	3620.0	26.00	26.00	0	
LTE BAND 53	QPSK @ 10 MHz BW	Cond Power	2489.0	20.70	20.70	0	
5G NR BAND N53	BPSK @ 10 MHz BW	Cond Power	2489.0	20.70	20.70	0	
LTE BAND 66	QPSK @ 20 MHz BW	Cond Power	1745.0	25.70	25.70	0	
5G NR BAND N66	BPSK @ 40 MHz BW	Cond Power	1730.0	25.70	25.70	0	
5G NR BAND n70	QPSK @ 15 MHz BW	Cond Power	1702.5	25.70	25.70	0	
5G NR BAND N77	BPSK @ 100 MHz BW	Cond Power	3500.0	29.00	29.00	0	
5G NR BAND N77	BPSK @ 100 MHz BW	Cond Power	3840.0	29.00	29.00	0	
LTE BAND 106	QPSK @ 3 MHz BW	Cond Power	899.0	25.70	25.70	0	

State B

A3720 SPOT CHECK RESULTS							
Technology	Worst Mode	Test Item	Measured	Original Model: A3447	Sub Model: A3720	Delta (dB)	Remarks
			Frequency (MHz)	FCC ID :BCG-E9188A (dBm)	FCC ID: BCG-E9203A (dBm)		
LTE BAND 7	QPSK @ 20 MHz BW	Cond Power	2535.0	25.70	25.70	0	
5G NR BAND N7	BPSK @ 40 MHz BW	Cond Power	2535.0	25.70	25.70	0	
LTE BAND 12	QPSK @ 10 MHz BW	Cond Power	707.5	25.70	25.70	0	
5G NR BAND N12	BPSK @ 15 MHz BW	Cond Power	707.5	25.70	25.70	0	
LTE BAND 13	QPSK @ 10 MHz BW	Cond Power	782.0	25.70	25.70	0	
LTE BAND 17	QPSK @ 10 MHz BW	Cond Power	710.0	25.70	25.70	0	
LTE BAND 25	QPSK @ 20 MHz BW	Cond Power	1882.5	25.70	25.70	0	
5G NR BAND N25	BPSK @ 40 MHz BW	Cond Power	1870.0	25.70	25.70	0	
LTE BAND 26 (90S)	QPSK @10 MHz BW	Cond Power	819.0	25.70	25.70	0	
5G NR BAND N26 (90S)	BPSK @10 MHz BW	Cond Power	819.0	25.70	25.70	0	
LTE BAND 26 (P22)	QPSK @ 10 MHz BW	Cond Power	836.5	25.70	25.70	0	
5G NR BAND N26 (P22)	BPSK @20 MHz BW	Cond Power	836.5	25.70	25.70	0	
LTE BAND 30	QPSK @ 10 MHz BW	Cond Power	2310.0	24.70	24.70	0	
5G NR BAND N30	BPSK @ 10 MHz BW	Cond Power	2310.0	24.70	24.70	0	
LTE BAND 41	QPSK @ 20 MHz BW	Cond Power	2593.0	28.70	28.70	0	
5G NR BAND N41	BPSK @ 100 MHz BW	Cond Power	2593.0	28.70	28.70	0	
LTE BAND 48	QPSK @ 20 MHz BW	Cond Power	3625.0	24.20	24.20	0	
5G NR BAND N48	BPSK @ 40 MHz BW	Cond Power	3620.0	24.20	24.20	0	
LTE BAND 53	QPSK @ 10 MHz BW	Cond Power	2489.0	20.70	20.70	0	
5G NR BAND N53	BPSK @ 10 MHz BW	Cond Power	2489.0	20.70	20.70	0	
LTE BAND 66	QPSK @ 20 MHz BW	Cond Power	1745.0	25.70	25.70	0	
5G NR BAND N66	BPSK @ 40 MHz BW	Cond Power	1730.0	25.70	25.70	0	
5G NR BAND n70	QPSK @ 15 MHz BW	Cond Power	1702.5	25.70	25.70	0	
5G NR BAND N77	BPSK @ 100 MHz BW	Cond Power	3500.0	29.00	29.00	0	
5G NR BAND N77	BPSK @ 100 MHz BW	Cond Power	3840.0	29.00	29.00	0	
LTE BAND 106	QPSK @ 3 MHz BW	Cond Power	899.0	25.70	25.70	0	

State A

A3720 SPOT CHECK RESULTS								
Technology	Worst Mode	Test Item	Measured	Original Model: A3447	Sub Model: A3720	Delta (dB)	Margin (dB)	Remarks
			Frequency (MHz)	FCC ID :BCG-E9188A (dBm)	FCC ID: BCG-E9203A (dBm)		M(dB)=C(dB)-R(dB)	
LTE BAND 7	QPSK @ highest BW	RSE	2560.0	-46.03	-47.06	-1.03	21.03	Note 1
LTE BAND 25	QPSK @ highest BW	RSE	1950.0	-49.86	-50.61	-0.75	36.86	Note 1
LTE BAND 26 (P22)	QPSK @ highest BW	RSE	844.0	-52.70	-51.47	1.23	39.70	Note 1
LTE BAND 48	QPSK @ 20 MHz BW	RSE	3560.0	-49.85	-49.99	-0.14	9.85	Note 1

Note 1: Deviation is within the threshold to allow for full data referencing.

Note 2: Noise floor measurement.

Note 3: Deviation is larger then the threshold to allow for data referencing. As the full test for this band had significant margin to the limits (typically more than 20dB but always more than 15dB) additional tests for other bands were not considered necessary.Full set of measurements performed.

State B

A3720 SPOT CHECK RESULTS								
Technology	Worst Mode	Test Item	Measured	Original Model: A3447	Sub Model: A3720	Delta (dB)	Margin (dB)	Remarks
			Frequency (MHz)	FCC ID :BCG-E9188A (dBm)	FCC ID: BCG-E9203A (dBm)		M(dB)=C(dB)-R(dB)	
LTE BAND 7	QPSK @ highest BW	RSE	2560.0	-48.58	-50.00	-1.42	23.58	Note 1
LTE BAND 25	QPSK @ highest BW	RSE	1950.0	-51.39	-50.80	0.59	38.39	Note 1
LTE BAND 26 (P22)	QPSK @ highest BW	RSE	844.0	-52.03	-53.18	-1.15	39.03	Note 1
LTE BAND 48	QPSK @ 20 MHz BW	RSE	3560.0	-49.26	-51.26	-2.00	9.28	Note 1

Note 1: Deviation is within the threshold to allow for full data referencing.

Note 2: Noise floor measurement.

Note 3: Deviation is larger then the threshold to allow for data referencing. As the full test for this band had significant margin to the limits (typically more than 20dB but always more than 15dB) additional tests for other bands were not considered necessary.Full set of measurements performed.

5.6. SPOT CHECK VERIFICATION RESULTS SUMMARY FOR A3721

5.6.1. A3447 AND A3721 ANTENNA PORT DATA

State A

A3721 SPOT CHECK RESULTS							
Technology	Worst Mode	Test Item	Measured Frequency MHz	Original Model: A3447 FCC ID :BCG-E9188A (dBm)	Sub Model: A3721 FCC ID: BCG-E9204A (dBm)	Delta (dB)	Remarks
GSM	GPRS 850	Cond Power	836.6	33.50	33.11	-0.39	
	GPRS 1900	Cond Power	1909.8	32.00	32.00	0.00	
WCDMA	REL99 B5	Cond Power	826.4	25.70	25.70	0.00	
	REL99 B2	Cond Power	1880.0	25.70	25.70	0.00	
	REL99 B4	Cond Power	1712.4	25.70	25.70	0.00	

State B

A3721 SPOT CHECK RESULTS							
Technology	Worst Mode	Test Item	Measured Frequency MHz	Original Model: A3447 FCC ID :BCG-E9188A (dBm)	Sub Model: A3721 FCC ID: BCG-E9204A (dBm)	Delta (dB)	Remarks
GSM	GPRS 850	Cond Power	836.6	33.50	33.11	-0.39	
	GPRS 1900	Cond Power	1909.8	32.00	32.00	0.00	
WCDMA	REL99 B5	Cond Power	826.4	25.70	25.70	0.00	
	REL99 B2	Cond Power	1880.0	25.70	25.70	0.00	
	REL99 B4	Cond Power	1712.4	25.70	25.70	0.00	

State A

A3721 Spot Check Results							
Technology	Worst Mode	Test Item	Measured	Original Model: A3447	Sub Model: A3721	Delta (dB)	Remarks
			Frequency (MHz)	FCC ID :BCG-E9188A (dBm)	FCC ID: BCG-E9204A (dBm)		
LTE 5CA	QPSK @ 10MHz+10MHz BW	Cond Power	831.4/844	25.70	25.70	0.00	
LTE 7CA	QPSK @ 20MHz+20MHz BW	Cond Power	2525.1/2544.9	25.70	25.70	0.00	
LTE 41CA	QPSK @ 20MHz+20MHz BW	Cond Power	2583.1/2602.9	28.70	28.70	0.00	
LTE 48CA	QPSK @ 20MHz+20MHz BW	Cond Power	3615.1/3634.9	25.00	25.00	0.00	

State B

A3721 Spot Check Results							
Technology	Worst Mode	Test Item	Measured	Original Model: A3447	Sub Model: A3721	Delta (dB)	Remarks
			Frequency (MHz)	FCC ID :BCG-E9188A (dBm)	FCC ID: BCG-E9204A (dBm)		
LTE 5CA	QPSK @ 10MHz+10MHz BW	Cond Power	831.4/844	25.70	25.70	0.00	
LTE 7CA	QPSK @ 20MHz+20MHz BW	Cond Power	2525.1/2544.9	25.70	25.70	0.00	
LTE 41CA	QPSK @ 20MHz+20MHz BW	Cond Power	2583.1/2602.9	28.70	28.70	0.00	
LTE 48CA	QPSK @ 20MHz+20MHz BW	Cond Power	3615.1/3634.9	24.20	24.20	0.00	

State A

A3721 SPOT CHECK RESULTS							
Technology	Worst Mode	Test Item	Measured	Original Model: A3447	Sub Model: A3721	Delta (dB)	Remarks
			Frequency (MHz)	FCC ID :BCG-E9188A (dBm)	FCC ID: BCG-E9204A (dBm)		
LTE BAND 7	QPSK @ 20 MHz BW	Cond Power	2535.0	25.70	25.70	0	
5G NR BAND N7	BPSK @ 40 MHz BW	Cond Power	2535.0	25.70	25.70	0	
LTE BAND 12	QPSK @ 10 MHz BW	Cond Power	707.5	25.70	25.70	0	
5G NR BAND N12	BPSK @ 15 MHz BW	Cond Power	707.5	25.70	25.70	0	
LTE BAND 13	QPSK @ 10 MHz BW	Cond Power	782.0	25.70	25.70	0	
LTE BAND 17	QPSK @ 10 MHz BW	Cond Power	710.0	25.70	25.70	0	
LTE BAND 25	QPSK @ 20 MHz BW	Cond Power	1882.5	25.70	25.70	0	
5G NR BAND N25	BPSK @ 40 MHz BW	Cond Power	1870.0	25.70	25.70	0	
LTE BAND 26 (90S)	QPSK @10 MHz BW	Cond Power	819.0	25.70	25.70	0	
5G NR BAND N26 (90S)	BPSK @10 MHz BW	Cond Power	819.0	25.70	25.70	0	
LTE BAND 26 (P22)	QPSK @ 10 MHz BW	Cond Power	836.5	25.70	25.70	0	
5G NR BAND N26 (P22)	BPSK @20 MHz BW	Cond Power	836.5	25.70	25.70	0	
LTE BAND 30	QPSK @ 10 MHz BW	Cond Power	2310.0	25.00	25.00	0	
5G NR BAND N30	BPSK @ 10 MHz BW	Cond Power	2310.0	25.00	25.00	0	
LTE BAND 41	QPSK @ 20 MHz BW	Cond Power	2593.0	28.70	28.70	0	
5G NR BAND N41	BPSK @ 100 MHz BW	Cond Power	2593.0	28.70	28.70	0	
LTE BAND 48	QPSK @ 20 MHz BW	Cond Power	3625.0	26.00	26.00	0	
5G NR BAND N48	BPSK @ 40 MHz BW	Cond Power	3620.0	26.00	26.00	0	
LTE BAND 66	QPSK @ 20 MHz BW	Cond Power	1745.0	25.70	25.70	0	
5G NR BAND N66	BPSK @ 40 MHz BW	Cond Power	1730.0	25.70	25.70	0	
5G NR BAND n70	QPSK @ 15 MHz BW	Cond Power	1702.5	25.70	25.70	0	
5G NR BAND N77	BPSK @ 100 MHz BW	Cond Power	3500.0	29.00	29.00	0	
5G NR BAND N77	BPSK @ 100 MHz BW	Cond Power	3840.0	29.00	29.00	0	
LTE BAND 106	QPSK @ 3 MHz BW	Cond Power	899.0	25.70	25.70	0	

State B

A3721 SPOT CHECK RESULTS							
Technology	Worst Mode	Test Item	Measured	Original Model: A3447	Sub Model: A3721	Delta (dB)	Remarks
			Frequency (MHz)	FCC ID :BCG-E9188A (dBm)	FCC ID: BCG-E9204A (dBm)		
LTE BAND 7	QPSK @ 20 MHz BW	Cond Power	2535.0	25.70	25.70	0	
5G NR BAND N7	BPSK @ 40 MHz BW	Cond Power	2535.0	25.70	25.70	0	
LTE BAND 12	QPSK @ 10 MHz BW	Cond Power	707.5	25.70	25.70	0	
5G NR BAND N12	BPSK @ 15 MHz BW	Cond Power	707.5	25.70	25.70	0	
LTE BAND 13	QPSK @ 10 MHz BW	Cond Power	782.0	25.70	25.70	0	
LTE BAND 17	QPSK @ 10 MHz BW	Cond Power	710.0	25.70	25.70	0	
LTE BAND 25	QPSK @ 20 MHz BW	Cond Power	1882.5	25.70	25.70	0	
5G NR BAND N25	BPSK @ 40 MHz BW	Cond Power	1870.0	25.70	25.70	0	
LTE BAND 26 (90S)	QPSK @ 10 MHz BW	Cond Power	819.0	25.70	25.70	0	
5G NR BAND N26 (90S)	BPSK @ 10 MHz BW	Cond Power	819.0	25.70	25.70	0	
LTE BAND 26 (P22)	QPSK @ 10 MHz BW	Cond Power	836.5	25.70	25.70	0	
5G NR BAND N26 (P22)	BPSK @ 20 MHz BW	Cond Power	836.5	25.70	25.70	0	
LTE BAND 30	QPSK @ 10 MHz BW	Cond Power	2310.0	24.70	24.70	0	
5G NR BAND N30	BPSK @ 10 MHz BW	Cond Power	2310.0	24.70	24.70	0	
LTE BAND 41	QPSK @ 20 MHz BW	Cond Power	2593.0	28.70	28.70	0	
5G NR BAND N41	BPSK @ 100 MHz BW	Cond Power	2593.0	28.70	28.70	0	
LTE BAND 48	QPSK @ 20 MHz BW	Cond Power	3625.0	24.20	24.20	0	
5G NR BAND N48	BPSK @ 40 MHz BW	Cond Power	3620.0	24.20	24.20	0	
LTE BAND 66	QPSK @ 20 MHz BW	Cond Power	1745.0	25.70	25.70	0	
5G NR BAND N66	BPSK @ 40 MHz BW	Cond Power	1730.0	25.70	25.70	0	
5G NR BAND n70	QPSK @ 15 MHz BW	Cond Power	1702.5	25.70	25.70	0	
5G NR BAND N77	BPSK @ 100 MHz BW	Cond Power	3500.0	29.00	29.00	0	
5G NR BAND N77	BPSK @ 100 MHz BW	Cond Power	3840.0	29.00	29.00	0	
LTE BAND 106	QPSK @ 3 MHz BW	Cond Power	899.0	25.70	25.70	0	

State A

A3721 SPOT CHECK RESULTS								
Technology	Worst Mode	Test Item	Measured	Original Model: A3447	Sub Model: A3721	Delta (dB)	Margin (dB)	Remarks
			Frequency (MHz)	FCC ID :BCG-E9188A (dBm)	FCC ID: BCG-E9204A (dBm)		M(dB)=C(dB)-R(dB)	
LTE BAND 7	QPSK @ highest BW	RSE	2560.0	-46.03	-48.82	-2.79	21.03	Note 1
LTE BAND 25	QPSK @ highest BW	RSE	1905.0	-49.86	-50.66	-0.80	36.86	Note 1
LTE BAND 26 (P22)	QPSK @ highest BW	RSE	844.0	-52.7	-51.28	1.42	39.70	Note 3
LTE BAND 48	QPSK @ 20 MHz BW	RSE	3560.0	-49.85	-52.50	-2.65	9.85	Note 1

Note 1: Deviation is within the threshold to allow for full data referencing.

Note 2: Noise floor measurement.

Note 3: Deviation is larger then the threshold to allow for data referencing. As the full test for this band had significant margin to the limits (typically more than 20dB but always more than 15dB) additional tests for other bands were not considered necessary.Full set of measurements performed.

State B

A3721 SPOT CHECK RESULTS								
Technology	Worst Mode	Test Item	Measured	Original Model: A3447	Sub Model: A3721	Delta (dB)	Margin (dB)	Remarks
			Frequency (MHz)	FCC ID :BCG-E9188A (dBm)	FCC ID: BCG-E9204A (dBm)		M(dB)=C(dB)-R(dB)	
LTE BAND 7	QPSK @ highest BW	RSE	2560.0	-48.58	-48.23	0.35	23.58	Note 1
LTE BAND 25	QPSK @ highest BW	RSE	1905.0	-51.39	-48.77	2.62	38.39	Note 1
LTE BAND 26 (P22)	QPSK @ highest BW	RSE	844.0	-52.07	-47.71	4.36	39.03	Note 3
LTE BAND 48	QPSK @ 20 MHz BW	RSE	3560.0	-49.26	-52.04	-2.78	9.26	Note 1

Note 1: Deviation is within the threshold to allow for full data referencing.

Note 2: Noise floor measurement.

Note 3: Deviation is larger then the threshold to allow for data referencing. As the full test for this band had significant margin to the limits (typically more than 20dB but always more than 15dB) additional tests for other bands were not considered necessary.Full set of measurements performed.


5.6.2. A3447 AND A3721 BAND 26 (PART 22) RADIATED PLOTS AND DATA

Full tests are performed on variant models.


State B

BAND 26 (PART 22) PLOTS


Full tests are performed on variant models.

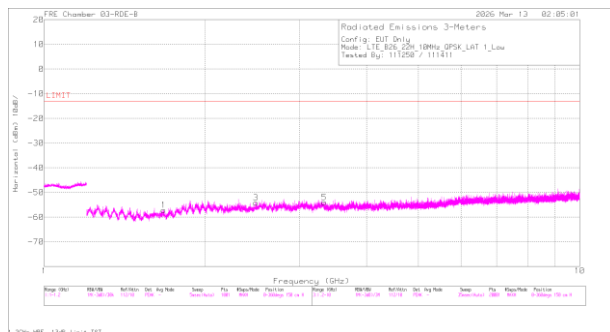


A3447 LTE B26 QPSK Low Channel Horizontal

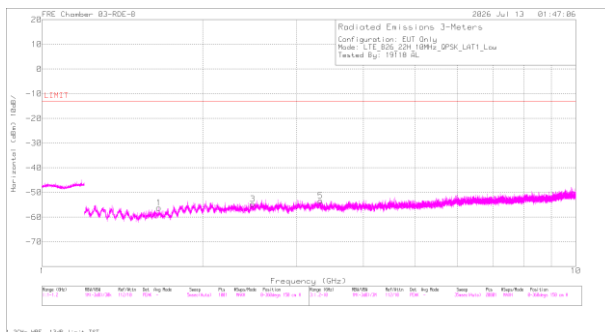


A3721 LTE B26 QPSK Low Channel Horizontal

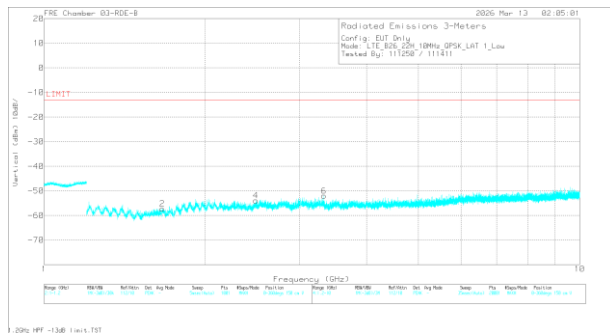


A3447 LTE B26 QPSK Low Channel Vertical

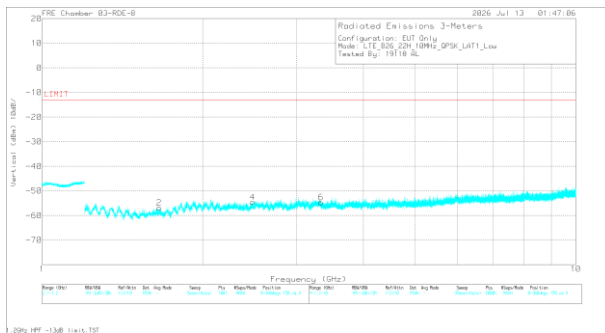


A3721 LTE B26 QPSK Low Channel Vertical

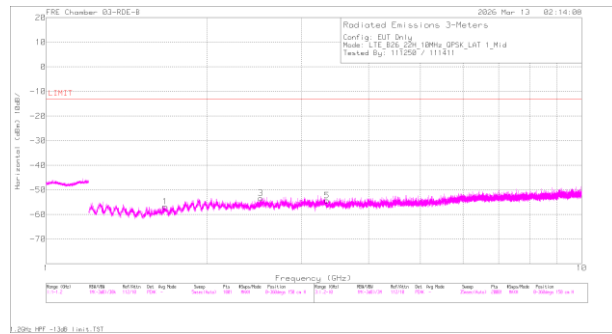


A3447 LTE B26 QPSK Mid Channel Horizontal

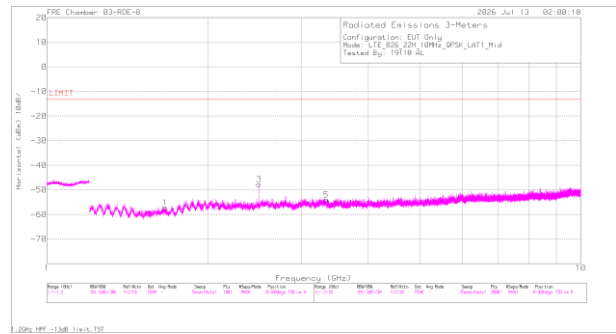


A3721 LTE B26 QPSK Middle Channel Horizontal

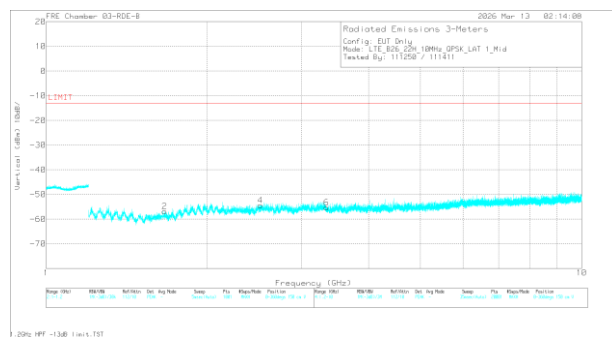


A3447 LTE B26 QPSK Mid Channel Vertical

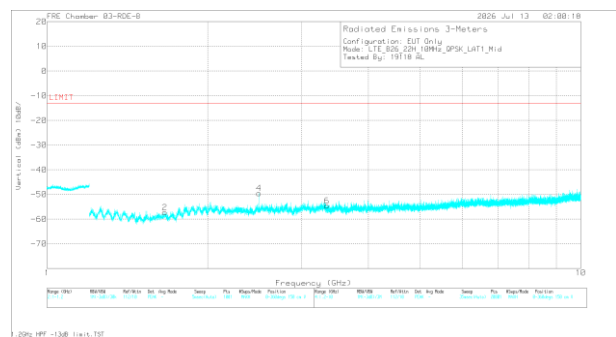


A3721 LTE B26 QPSK Middle Channel Vertical

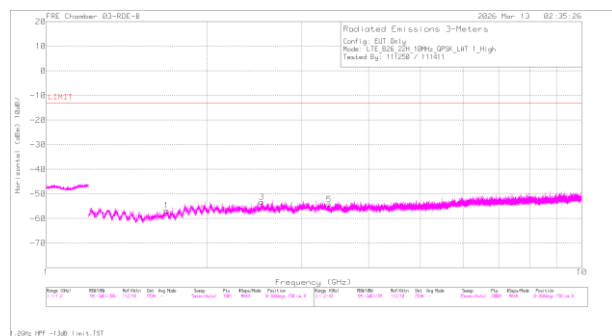


A3447 LTE B26 QPSK High Channel Horizontal

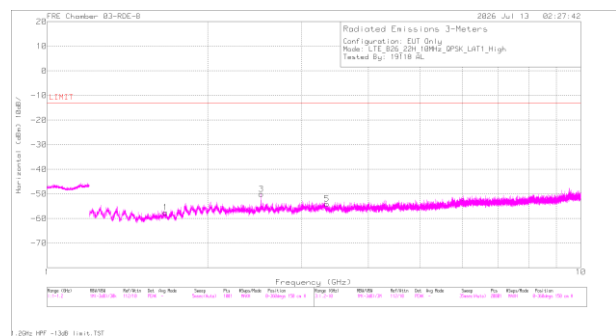

A3721 LTE B26 QPSK High Channel Horizontal

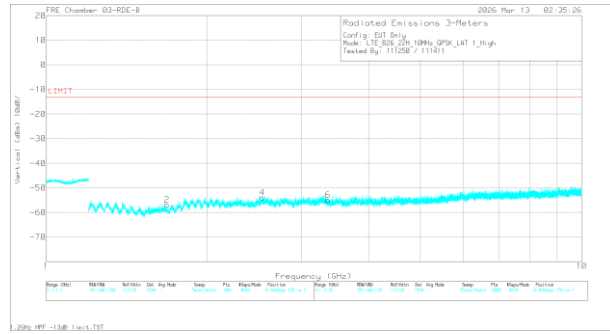

A3447 LTE B26 QPSK High Channel Vertical

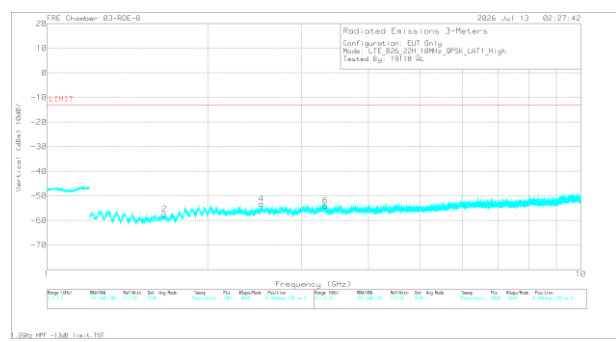

A3721 LTE B26 QPSK High Channel Vertical

A3447, LTE BAND 26 (QPSK 10.0MHZ BANDWIDTH, ANT 2)

Configuration:	EUT Only
Mode	LTE B26 QPSK 10MHz

Date	Test Engineer	Chamber #	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	EIRP CF	Gain/ Loss (dB)	Correct Reading (dBm)	Limit (dBm)	Margin (dB)	Polarity
3/11/2026	32934	03-RDE-C	Low Ch 829	2	1.666400	56.75	Pk	28.7	-95.2	-48.32	-58.07	-13	-45.07	H
					1.662880	56.74	Pk	28.6	-95.2	-48.28	-58.14	-13	-45.14	V
					2.494920	56.59	Pk	32.4	-95.2	-48.49	-54.70	-13	-41.70	H
					2.489640	57.08	Pk	32.4	-95.2	-48.56	-54.28	-13	-41.28	V
					3.330920	53.66	Pk	32.9	-95.2	-45.86	-54.50	-13	-41.50	H
					3.320800	54.36	Pk	32.9	-95.2	-45.89	-53.83	-13	-40.83	V
			Mid Ch 836.5		1.672120	58.16	Pk	28.8	-95.2	-48.29	-56.53	-13	-43.53	H
					1.673440	58.18	Pk	28.8	-95.2	-48.26	-56.48	-13	-43.48	V
					2.476440	57.93	Pk	32.3	-95.2	-48.53	-53.50	-13	-40.50	H
					2.489200	58.64	Pk	32.4	-95.2	-48.54	-52.70	-13	-39.70	V
					3.384160	54.15	Pk	32.8	-95.2	-46.20	-54.45	-13	-41.45	H
					3.359080	54.63	Pk	32.9	-95.2	-46.14	-53.81	-13	-40.81	V
			High Ch 844		1.684440	56.82	Pk	28.9	-95.2	-48.21	-57.69	-13	-44.69	H
					1.672120	57.39	Pk	28.8	-95.2	-48.29	-57.30	-13	-44.30	V
					2.419680	57.85	Pk	32.2	-95.2	-48.89	-54.04	-13	-41.04	H
					2.413080	56.95	Pk	32.2	-95.2	-48.87	-54.92	-13	-41.92	V
					3.367000	54.35	Pk	32.9	-95.2	-46.19	-54.14	-13	-41.14	H
					3.349840	53.79	Pk	32.9	-95.2	-46.02	-54.53	-13	-41.53	V

3721, LTE BAND 26 (QPSK 10.0MHZ BANDWIDTH, ANT 2)

Configuration:	EUT Only
Mode	LTE B26 QPSK 10MHz

Date	Test Engineer	Chamber #	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	EIRP CF	Gain/ Loss (dB)	Correct Reading (dBm)	Limit (dBm)	Margin (dB)	Polarity
7/13/2026	19118	03-RDE-B	Low Ch 829	2	1.656720	59.79	Pk	29.0	-95.2	-49.76	-56.17	-13	-43.17	H
					1.658040	59.10	Pk	29.0	-95.2	-49.77	-56.87	-13	-43.87	V
					2.481280	59.04	Pk	31.9	-95.2	-50.45	-54.71	-13	-41.71	H
					2.480400	59.16	Pk	31.9	-95.2	-50.46	-54.60	-13	-41.60	V
					3.326520	56.31	Pk	32.8	-95.2	-47.27	-53.36	-13	-40.36	H
					3.330040	55.06	Pk	32.7	-95.2	-47.26	-54.70	-13	-41.70	V
			Mid Ch 836.5		1.663760	58.71	Pk	29.0	-95.2	-49.78	-57.27	-13	-44.27	H
					1.661560	58.68	Pk	29.0	-95.2	-49.79	-57.31	-13	-44.31	V
					2.496240	65.83	Pk	32.0	-95.2	-50.34	-47.71	-13	-34.71	H
					2.496240	64.02	Pk	32.0	-95.2	-50.34	-49.52	-13	-36.52	V
					3.334000	55.76	Pk	32.7	-95.2	-47.27	-54.01	-13	-41.01	H
					3.344560	55.23	Pk	32.7	-95.2	-47.34	-54.61	-13	-41.61	V
			High Ch 844		1.666180	58.45	Pk	29.0	-95.2	-49.77	-57.52	-13	-44.52	H
					1.661120	58.57	Pk	29.0	-95.2	-49.78	-57.41	-13	-44.41	V
					2.518680	63.28	Pk	32.1	-95.2	-50.16	-49.98	-13	-36.98	H
					2.518680	60.03	Pk	32.1	-95.2	-50.16	-53.23	-13	-40.23	V
					3.342360	55.82	Pk	32.7	-95.2	-47.36	-54.04	-13	-41.04	H
					3.324320	55.75	Pk	32.8	-95.2	-47.26	-53.91	-13	-40.91	V

5.7. REFERENCE DETAIL

Reference application that contains the reused reference data.

Reference FCC ID	Varant model FCC IDs	Equipment Class	Reference test report / Data referencing sections
BCG-E9188A	BCG-E9198A	PCE	16064952-E21 / All sections 16064952-E22 / All sections 16064952-E23 / All sections 16064952-E26 / All sections 16064952-E27 / All sections 16064952-E29 / All sections 16064952-E28 / All sections 16064952-E30 / All sections 16064952-E31 / All sections 16064952-E33 / All sections
		CBE	16064952-E34 / All sections
		TNE	16064952-E24 / All sections 16064952-E25 / All sections
BCG-E9188A	BCG-E9203A	PCE	16064952-E21 / All sections 16064952-E22 / All sections 16064952-E23 / All sections 16064952-E26 / All sections except B71/n71 16064952-E27 / All sections 16064952-E29 / All sections 16064952-E28 / All sections 16064952-E30 / All sections 16064952-E31 / All sections
		CBE	16064952-E34 / All sections
		TNE	16064952-E24 / All sections 16064952-E25 / All sections
BCG-E9188A	BCG-E9204A	PCE	16064952-E21 / All sections 16064952-E22 / All sections 16064952-E23 / All sections 16064952-E26 / All sections except B71/n71 16064952-E27 / All sections 16064952-E29 / All sections 16064952-E28 / All sections 16064952-E30 / All sections 16064952-E31 / All sections
		CBE	16064952-E34 / All sections

5.8. SOFTWARE AND FIRMWARE

The EUT firmware installed during testing was version 24A388.


5.9. SPOT CHECK WORST-CASE CONFIGURATION AND MODE

The spot checks were performed on the worst-case orientations and configurations based on the parent model of reference report.


5.10. DESCRIPTION OF TEST SETUP

SUPPORT TEST EQUIPMENT						
Description		Manufacturer	Model	Serial Number	FCC ID/ DoC	
Laptop		Apple	MacBook Pro	F5JJ42D7R9	BCGA1708	
Laptop		Apple	MacBook Pro	JWV2QWM0DT	BCGA2338	
Laptop		Apple	MacBook Pro	FG6Q9RW54Y	BCGA2338	
Laptop		Apple	MacBook Pro	XC2KF6F2D7	BCGA2338	
Laptop		Apple	MacBook Pro	YWCT4V933R	BCGA2338	
Laptop		Apple	MacBook Pro	HRP127004	BCGA2338	
AC/DC adapter		Apple	A1718	C4H64450HH3GN8RA6	--	
AC/DC adapter		Apple	A2130	F16H69002MD000000P	--	
AC/DC adapter		Apple	A1555 P	XQ76XLCJ2D	--	
I/O CABLES (RF CONDUCTED TEST)						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	3	US 115V	Un-shielded	2.0	N/A
2	USB	1	DC	Shielded	1.0	N/A
3	RF In/Out	2	SMA	Shielded	0.9	N/A
4	RF In/Out	1	Barrel	Shielded	N/A	N/A
I/O CABLES (RF RADIATED TEST)						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	RF In/Out	1	SMA	Shielded	5.0	N/A

CONDUCTED SETUP

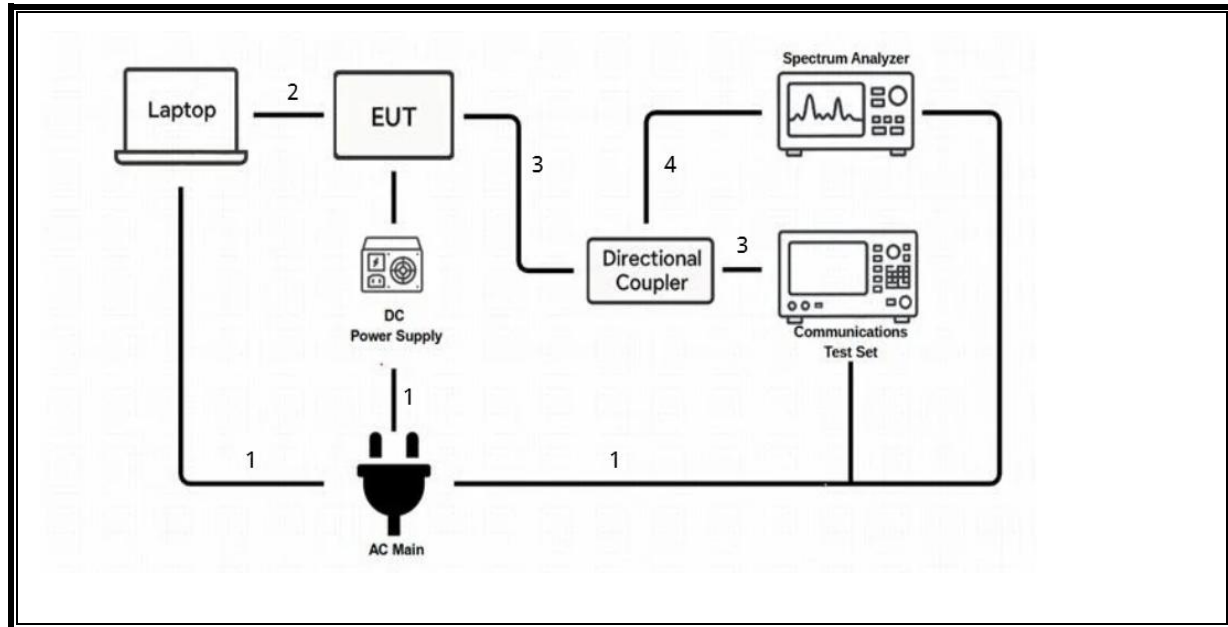

RADIATED SETUP

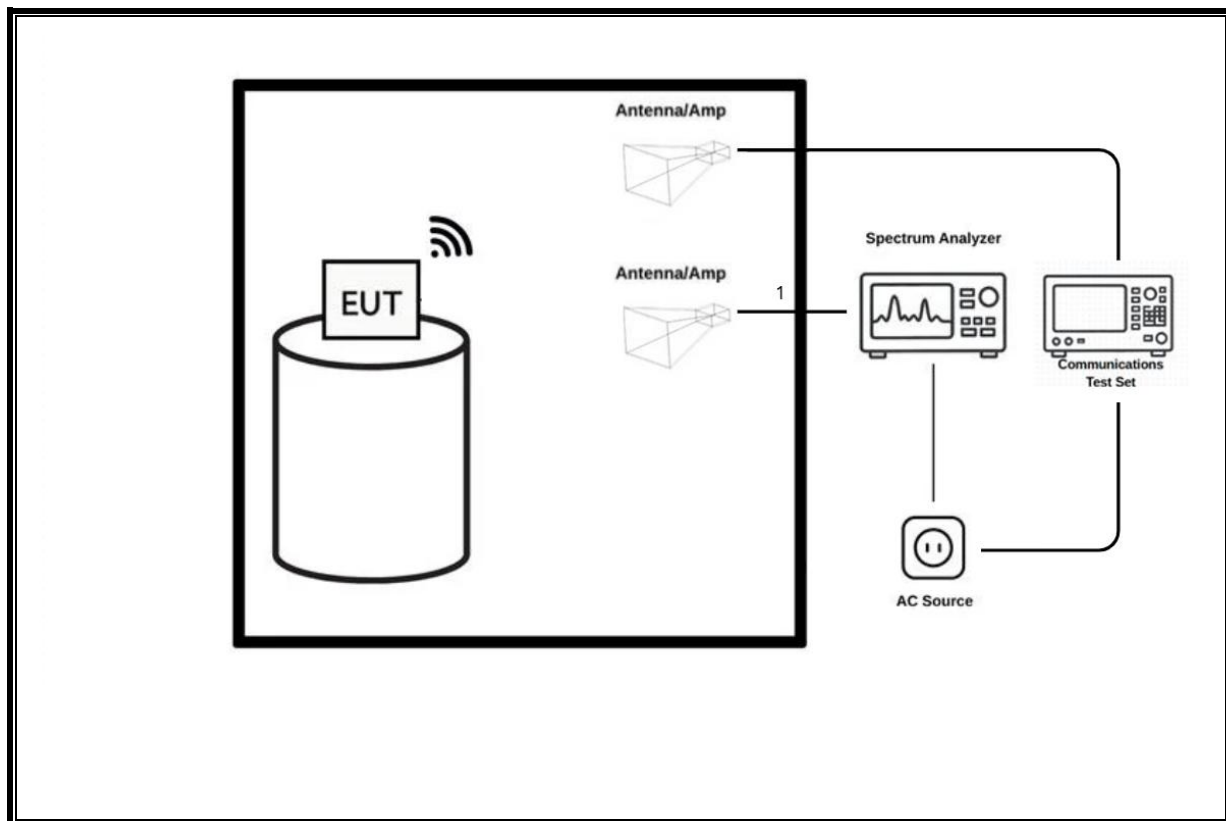

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment were utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Wideband Communication Test Set, Call Box	R&S GmbH & Co.	CMW500	222796	2027-03-03
EMI TEST RECEIVER	Rohde & Schwarz	ESW44	169933	2027-02-28
Antenna, Horn 1-18GHz	ETS Lindgren	3117	80402	2027-07-31
RF Filter Box, 1-18GHz, 12 Port	UL-FR1	Frankenstein	231874	2027-01-31
EMI TEST RECEIVER	Rohde & Schwarz	ESW44	170063	2027-02-27
RF Filter Box, 1-18GHz, 12 Port	UL-FR1	Frankenstein	231875	2026-12-31
Antenna, Horn 1-18GHz	ETS Lindgren	3117	223084	2026-12-31
Antenna, Broadband Hybrid, 30MHz to 3GHz	Sunol Sciences Corp.	JB3	174374	2027-06-30
Antenna, Passive Loop 30Hz - 1MHz	ELECTRO-METRICS	EM-6871	170013	2026-09-30
Antenna, Passive Loop 100KHz - 30MHz	ELECTRO-METRICS	EM-6872	170015	2026-09-30
Antenna, Horn 18 to 26.5GHz	A.R.A.	MWH-1826/B	199659	2028-05-31
Antenna, Horn 26.5-40GHz	A.R.A.	MWH-2640/B	199661	2028-05-31
EMI TEST RECEIVER	Rohde & Schwarz	ESW44	226079	2027-02-28
Antenna, Horn 1-18GHz	ETS Lindgren	3117	230299	2026-09-30
EMI TEST RECEIVER	Rohde & Schwarz	ESW44	169937	2027-05-31
Antenna, Horn 1-18GHz	ETS Lindgren	84797	80402	2026-10-31
RF Filter Box, 1-18GHz, 12 Port	UL-FR1	Frankenstein	230878	2027-05-31
Antenna, Horn 1-18GHz	ETS Lindgren	84797	200897	2028-05-31
EMI TEST RECEIVER	Rohde & Schwarz	ESW44	169935	2027-03-18
PXA Signal Analyzer	Keysight Technologies Inc	N9030B	272589	2026-10-03
PXA Signal Analyzer	Keysight Technologies Inc	N9030B	231739	2027-01-31
PXA Signal Analyzer	Keysight Technologies Inc	N9030B	276680	2027-01-31
PXA Signal Analyzer	Keysight Technologies Inc	N9030B	272595	2026-11-30
Wideband Communication Call Box	Rohde & Schwarz	CMW500	230298	2027-02-28
Wideband Communication Call Box	Rohde & Schwarz	CMW500	230295	2027-02-28
Wideband Communication Call Box	Rohde & Schwarz	CMW500	262742	2027-02-11
Wideband Communication Call Box	Rohde & Schwarz	CMW500	262741	2027-02-11
Conducted Switch Box	N/A	CSB	245778	2026-10-31
Conducted Switch Box	N/A	CSB	262354	2026-10-31
Filter, BRF 3400-3800MHz, 18GHz max	Micro-Tronics	BRM50711	217364	2026-11-24
*Filter, BRF 2305-2315	Micro-Tronics	BRC20553	224186	2026-06-29
Directional Coupler	KRYTAR	152610	254457	2026-09-04
Directional Coupler	KRYTAR	101040010K	254458	2026-09-04
UL AUTOMATION SOFTWARE				
Conducted Software	UL	Antenna Port	Ver.2022.8.16	
Conducted Software	UL	Station Tool	Ver. 12.2, 2.0, 5.0	
Radiated Software	UL	UL EMC	Ver 9.5, May 1, 2023	

NOTES:

- * Testing is completed before equipment expiration date.
- ** Equipment listed above has a calibration due date during the testing period, the testing is completed before equipment expiration date.

Appendix A – Reference Test Report

Attached are the test reports (16064952-E21 to 16064952-E34) containing the reference data from the parent model as detailed in section 5.7.