

RADIATED TEST REPORT

Report Number: 16064952-E10&11V2

Applicant : APPLE INC.
1 APPLE PARK WAY
CUPERTINO, CA 95014, U.S.A.

Model : A3447 (Parent)
A3719, A3720, A3721 (Variants)

Brand : APPLE

FCC ID : BCG-E9188A (Parent Model)
BCG-E9198A, BCG-E9203A, BCG-E9204A (Variant Models)

IC : 579C-E9188A (Parent Model)
579C-E9198A, 579C-E9203A, 579C-E9204A (Variant Models)

EUT Description : SMARTPHONE

Test Standard(s) : FCC 47 CFR PART 15 SUBPART E
ISED RSS-247 ISSUE 4
ISED RSS-GEN ISSUE 5 + A1 + A2

Date Of Issue:
2026-07-30

Prepared by:
UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538 U.S.A.
TEL: (510) 319-4000
FAX: (510) 661-0888



REPORT REVISION HISTORY

Rev.	Issue Date	Revisions	Revised By
V1	2026-07-10	Initial Review	--
V2	2026-07-14	Addressed TCB feedback in Sections 1	Everardo Torres

TABLE OF CONTENTS

1. RADIATED TEST RESULTS	5
1.1. TRANSMITTER ABOVE 1 GHz	7
STATE A.....	7
1.1.1. 802.11n/ac SISO MODE IN UNII-1 BAND – BANDEDGE	7
1.1.2. 802.11n/ac MIMO MODE IN UNII-1 BAND – BANDEDGE	9
1.1.3. 802.11be SISO SU MODE IN UNII-1 BAND – BANDEDGE	10
1.1.4. 802.11be SISO PARTIAL RU MODE IN UNII-1 BAND – BANDEDGE	12
1.1.5. 802.11be MIMO SU MODE IN UNII-1 BAND – BANDEDGE	13
1.1.6. 802.11be MIMO PARTIAL RU MODE IN UNII-1 BAND – BANDEDGE	14
1.1.7. 802.11n/ac MIMO MODE IN UNII-1 BAND – SPURIOUS EMISSIONS	16
1.1.8. 802.11be MIMO SU MODE IN UNII-1 BAND – SPURIOUS EMISSIONS	19
1.1.9. 802.11be MIMO PARTIAL RU MODE IN UNII-1 BAND – SPURIOUS EMISSIONS	21
1.1.10. 802.11n/ac SISO MODE IN UNII-2A BAND – BANDEDGE	24
1.1.11. 802.11n/ac MIMO MODE IN UNII-2A BAND - BANDEDGE	26
1.1.12. 802.11be SISO SU MODE IN UNII-2A BAND – BANDEDGE	27
1.1.13. 802.11be SISO PARTIAL RU MODE IN UNII-2A BAND – BANDEDGE	29
1.1.14. 802.11be MIMO SU MODE IN UNII-2A BAND – BANDEDGE	30
1.1.15. 802.11be MIMO PARTIAL RU MODE IN UNII-2A BAND – BANDEDGE	31
1.1.16. 802.11n/ac MIMO MODE IN UNII-2A BAND – SPURIOUS EMISSIONS	33
1.1.17. 802.11be MIMO SU MODE IN UNII-2A BAND – SPURIOUS EMISSIONS	35
1.1.18. 802.11be MIMO PARTIAL RU MODE IN UNII-2A BAND – SPURIOUS EMISSIONS	37
1.1.19. 802.11n/ac SISO MODE IN UNII-2C BAND – BANDEDGE	40
1.1.20. 802.11n/ac MIMO MODE IN UNII-2C BAND – BANDEDGE	44
1.1.21. 802.11be SISO SU MODE IN UNII-2C BAND – BANDEDGE	46
1.1.22. 802.11be SISO PARTIAL RU MODE IN UNII-2C BAND - BANDEDGE	50
1.1.23. 802.11be MIMO SU MODE IN UNII-2C BAND – BANDEDGE	53
1.1.24. 802.11be MIMO PARTIAL RU MODE IN UNII-2C BAND - BANDEDGE	55
1.1.25. 802.11n/ac MIMO MODE IN UNII-2C BAND – SPURIOUS EMISSIONS	59
1.1.26. 802.11be SU MIMO MODE IN UNII-2C BAND – SPURIOUS EMISSIONS	62
1.1.27. 802.11be MIMO PARTIAL RU MODE IN UNII-2C BAND – SPURIOUS EMISSIONS	65
1.1.28. 802.11n/ac SISO MODE IN UNII-3 BAND BANDEDGE	69
1.1.29. 802.11n/ac MIMO MODE IN UNII-3 BAND - BANDEDGE	70
1.1.30. 802.11be SISO SU MODE IN UNII-3 BAND - BANDEDGE	71
1.1.31. 802.11be SISO PARTIAL RU MODE IN UNII-3 BAND – BANDEDGE	72
1.1.32. 802.11be MIMO SU MODE IN UNII-3 BAND - BANDEDGE	73
1.1.33. 802.11be MIMO PARTIAL RU MODE IN UNII-3 BAND - BANDEDGE	74
1.1.34. 802.11n/ac MIMO MODE IN UNII-3 BAND – SPURIOUS EMISSIONS	77
1.1.35. 802.11be MIMO SU MODE IN UNII-3 BAND – SPURIOUS EMISSIONS	79
1.1.36. 802.11be MIMO PARTIAL RU MODE IN UNII-3 BAND – SPURIOUS EMISSIONS	81
STATE B.....	84
1.1.37. 802.11n/ac SISO MODE IN UNII-1 BAND – BANDEDGE	84
1.1.38. 802.11n/ac MIMO MODE IN UNII-1 BAND – BANDEDGE	86
1.1.39. 802.11be SISO SU MODE IN UNII-1 BAND – BANDEDGE	87
1.1.40. 802.11be SISO PARTIAL RU MODE IN UNII-1 BAND – BANDEDGE	89
1.1.41. 802.11be MIMO SU MODE IN UNII-1 BAND – BANDEDGE	90
1.1.42. 802.11be MIMO PARTIAL RU MODE IN UNII-1 BAND – BANDEDGE	91
1.1.43. 802.11n/ac MIMO MODE IN UNII-1 BAND – SPURIOUS EMISSIONS	93

1.1.44.	802.11be MIMO SU MODE IN UNII-1 BAND – SPURIOUS EMISSIONS	96
1.1.45.	802.11be MIMO PARTIAL RU MODE IN UNII-1 BAND – SPURIOUS EMISSIONS 98	
1.1.46.	802.11n/ac SISO MODE IN UNII-2A BAND – BANDEDGE.....	101
1.1.47.	802.11n/ac MIMO MODE IN UNII-2A BAND - BANDEDGE	103
1.1.48.	802.11be SISO SU MODE IN UNII-2A BAND – BANDEDGE.....	104
1.1.49.	802.11be SISO PARTIAL RU MODE IN UNII-2A BAND – BANDEDGE	106
1.1.50.	802.11be MIMO SU MODE IN UNII-2A BAND – BANDEDGE	107
1.1.51.	802.11be MIMO PARTIAL RU MODE IN UNII-2A BAND – BANDEDGE	108
1.1.52.	802.11n/ac MIMO MODE IN UNII-2A BAND – SPURIOUS EMISSIONS	110
1.1.53.	802.11be MIMO SU MODE IN UNII-2A BAND – SPURIOUS EMISSIONS.....	113
1.1.54.	802.11be MIMO PARTIAL RU MODE IN UNII-2A BAND – SPURIOUS EMISSIONS.....	115
1.1.55.	802.11n/ac SISO MODE IN UNII-2C BAND – BANDEDGE.....	118
1.1.56.	802.11n/ac MIMO MODE IN UNII-2C BAND – BANDEDGE	122
1.1.57.	802.11be SISO SU MODE IN UNII-2C BAND – BANDEDGE	124
1.1.58.	802.11be SISO PARTIAL RU MODE IN UNII-2C BAND - BANDEDGE	128
1.1.59.	802.11be MIMO SU MODE IN UNII-2C BAND – BANDEDGE	131
1.1.60.	802.11be MIMO PARTIAL RU MODE IN UNII-2C BAND - BANDEDGE.....	133
1.1.61.	802.11n/ac MIMO MODE IN UNII-2C BAND – SPURIOUS EMISSIONS.....	137
1.1.62.	802.11be SU MIMO MODE IN UNII-2C BAND – SPURIOUS EMISSIONS.....	140
1.1.63.	802.11be MIMO PARTIAL RU MODE IN UNII-2C BAND – SPURIOUS EMISSIONS.....	143
1.1.64.	802.11n/ac SISO MODE IN UNII-3 BAND BANDEDGE	147
1.1.65.	802.11n/ac MIMO MODE IN UNII-3 BAND - BANDEDGE.....	148
1.1.66.	802.11be SISO SU MODE IN UNII-3 BAND - BANDEDGE.....	149
1.1.67.	802.11be SISO PARTIAL RU MODE IN UNII-3 BAND – BANDEDGE.....	150
1.1.68.	802.11be MIMO SU MODE IN UNII-3 BAND - BANDEDGE.....	151
1.1.69.	802.11be MIMO PARTIAL RU MODE IN UNII-3 BAND - BANDEDGE	152
1.1.70.	802.11n/ac MIMO MODE IN UNII-3 BAND – SPURIOUS EMISSIONS	155
1.1.71.	802.11be MIMO SU MODE IN UNII-3 BAND – SPURIOUS EMISSIONS	157
1.1.72.	802.11be MIMO PARTIAL RU MODE IN UNII-3 BAND – SPURIOUS EMISSIONS.....	159
1.2.	WORST CASE BELOW 1 GHz	162
1.3.	WORST CASE 18-26 GHz	165
1.4.	WORST CASE 26-40 GHz	168
2.	AC POWERLINE CONDUCTED EMISSIONS	171
3.	SETUP PHOTOS.....	176

1. RADIATED TEST RESULTS

LIMITS

FCC §15.205 and §15.209 -Restricted bands
FCC §15.407(b) (1-3) -Un-Restricted bands

RSS 247 Issue 4 Sections

7.3.1.3 (for 5150-5250 MHz band)
7.3.2.3 (for 5250-5350 MHz band)
7.3.3.3 (for 5470-5725 MHz band)
7.3.4.4 (for 5725-5850 MHz band)

General field strength limits at frequencies above 30 MHz;

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz and 1.5 meters above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements in the 30-1000MHz range, 9kHz for peak and/or quasi-peak detection measurements in the 0.15-30MHz range, and 200Hz for peak and/or quasi-peak detection measurements in the 9 to 150kHz range. Peak detection is used unless otherwise noted as quasi-peak or average (9-90kHz and 110-490kHz).

For pre-scans from 1 – 18 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 30 kHz for peak measurements.

For final measurements above 1 GHz, the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements and as applicable for average measurements.

The spectrum from 30 MHz to 1GHz and 18GHz to 40 GHz is investigated with the transmitter set to transmit at the channel with the highest output power as a worst-case scenario. 1GHz to 18GHz was set to the lowest, middle, and highest channels in the 5 GHz bands.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

Note: The limits in CFR 47, Part 15, Subpart C, paragraph 15.209(a), are identical to those in RSS-Gen section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as report in the table) using free space impedance of 377 Ohms. For example, the measurement at frequency X kHz resulted in a level of Y dBuV/m, which is equivalent to $Y-51.5 = Z$ dBuA/m, which has the same margin, W dB to the corresponding RSS-Gen Table 6 limit as it has to 15.209(a) limit.

In addition:

KDB 414788 Open Field Site (OFS) and Chamber Correlation Justification

Based on FCC 15.31 (f) (2), measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed, and the chamber-measured test result is the worst-case test result.

RESULTS

The plots in these sections are for reference settings only for different bandwidths and different antennas.

1.1. TRANSMITTER ABOVE 1 GHz

STATE A

1.1.1. 802.11n/ac SISO MODE IN UNII-1 BAND – BANDEDGE

20MHz

UNII-1 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
HT20	5180	6	* 5.150000	65.92	Pk	34.30	0.00	-35.53	64.69	-	-	74	-9.31	189	145	H
			* 5.147196	68.35	Pk	34.30	0.00	-35.52	67.13	-	-	74	-6.87	189	145	H
			* 5.150000	52.20	RMS	34.30	0.00	-35.53	50.97	54	-3.03	-	-	189	145	H
			* 5.149946	52.68	RMS	34.30	0.00	-35.53	51.45	54	-2.55	-	-	189	145	H
			* 5.150000	62.66	Pk	34.30	0.00	-35.53	61.43	-	-	74	-12.57	192	101	V
			* 5.149390	64.53	Pk	34.30	0.00	-35.52	63.31	-	-	74	-10.69	192	101	V
			* 5.150000	49.82	RMS	34.30	0.00	-35.53	48.59	54	-5.41	-	-	192	101	V
			* 5.149529	50.16	RMS	34.30	0.00	-35.53	48.93	54	-5.07	-	-	192	101	V
		5	* 5.150000	53.76	Pk	34.50	0.00	-23.50	64.76	-	-	74	-9.24	185	107	H
			* 5.149835	56.79	Pk	34.50	0.00	-23.50	67.79	-	-	74	-6.21	185	107	H
			* 5.150000	38.74	RMS	34.50	0.00	-23.50	49.74	54	-4.26	-	-	185	107	H
			* 5.149918	40.15	RMS	34.50	0.00	-23.50	51.15	54	-2.85	-	-	185	107	H
			* 5.150000	49.48	Pk	34.50	0.00	-23.50	60.48	-	-	74	-13.52	239	162	V
			* 5.149585	52.91	Pk	34.50	0.00	-23.60	63.81	-	-	74	-10.19	239	162	V
			* 5.150000	33.97	RMS	34.50	0.00	-23.50	44.97	54	-9.03	-	-	239	162	V
			* 5.149946	35.15	RMS	34.50	0.00	-23.50	46.15	54	-7.85	-	-	239	162	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

40MHz

UNII-1 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
HT40	5190	6	* 5.150000	67.87	Pk	34.20	0.00	-36.23	65.84	-	-	74	-8.16	92	103	H
			* 5.148835	71.25	Pk	34.20	0.00	-36.23	69.22	-	-	74	-4.78	92	103	H
			* 5.150000	50.74	RMS	34.20	0.00	-36.23	48.71	54	-5.29	-	-	92	103	H
			* 5.149723	52.04	RMS	34.20	0.00	-36.23	50.01	54	-3.99	-	-	92	103	H
			* 5.150000	63.03	Pk	34.20	0.00	-36.23	61.00	-	-	74	-13.00	104	101	V
			* 5.149196	63.54	Pk	34.20	0.00	-36.23	61.51	-	-	74	-12.49	104	101	V
			* 5.150000	47.11	RMS	34.20	0.00	-36.23	45.08	54	-8.92	-	-	104	101	V
			* 5.149446	48.22	RMS	34.20	0.00	-36.23	46.19	54	-7.81	-	-	104	101	V
		5	* 5.150000	62.68	Pk	34.10	0.00	-30.80	65.98	-	-	74	-8.02	334	193	H
			* 5.149707	64.42	Pk	34.10	0.00	-30.80	67.72	-	-	74	-6.28	334	193	H
			* 5.150000	46.73	RMS	34.10	0.00	-30.80	50.03	54	-3.97	-	-	334	193	H
			* 5.149769	47.63	RMS	34.10	0.00	-30.80	50.93	54	-3.07	-	-	334	193	H
			* 5.150000	57.17	Pk	34.10	0.00	-30.80	60.47	-	-	74	-13.53	60	191	V
			* 5.149800	60.86	Pk	34.10	0.00	-30.80	64.16	-	-	74	-9.84	60	191	V
			* 5.150000	42.87	RMS	34.10	0.00	-30.80	46.17	54	-7.83	-	-	60	191	V
			* 5.149894	43.74	RMS	34.10	0.00	-30.80	47.04	54	-6.96	-	-	60	191	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

80MHz

UNII-1 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
VHT80	5210	6	* 5.150000	67.35	Pk	34.40	0.00	-34.40	67.35	-	-	74	-6.65	6	105	H
			* 5.149207	69.04	Pk	34.40	0.00	-34.40	69.04	-	-	74	-4.96	6	105	H
			* 5.150000	48.94	RMS	34.40	0.00	-34.40	48.94	54	-5.06	-	-	6	105	H
			* 5.149519	49.87	RMS	34.40	0.00	-34.40	49.87	54	-4.13	-	-	6	105	H
			* 5.150000	62.60	Pk	34.40	0.00	-34.40	62.60	-	-	74	-11.40	53	106	V
			* 5.149800	63.85	Pk	34.40	0.00	-34.40	63.85	-	-	74	-10.15	53	106	V
		5	* 5.150000	45.23	RMS	34.40	0.00	-34.40	45.23	54	-8.77	-	-	53	106	V
			* 5.147831	46.22	RMS	34.40	0.00	-34.40	46.22	54	-7.78	-	-	53	106	V
			* 5.150000	65.46	Pk	34.10	0.00	-30.80	68.76	-	-	74	-5.24	326	204	H
			* 5.149957	65.82	Pk	34.10	0.00	-30.80	69.12	-	-	74	-4.88	326	204	H
			* 5.150000	45.81	RMS	34.10	0.00	-30.80	49.11	54	-4.89	-	-	326	204	H
			* 5.149550	47.80	RMS	34.10	0.00	-30.80	51.10	54	-2.90	-	-	326	204	H
			* 5.150000	57.41	Pk	34.10	0.00	-30.80	60.71	-	-	74	-13.29	51	207	V
			* 5.149550	59.65	Pk	34.10	0.00	-30.80	62.95	-	-	74	-11.05	51	207	V
			* 5.150000	41.79	RMS	34.10	0.00	-30.80	45.09	54	-8.91	-	-	51	207	V
			* 5.147769	42.60	RMS	34.10	0.00	-30.90	45.80	54	-8.20	-	-	51	207	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

160MHz

UNII-1 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
VHT160	5250 (Straddle)	6	* 5.150000	59.44	Pk	34.10	0.00	-30.80	62.74	-	-	74	-11.26	317	208	H
			* 5.121609	66.10	Pk	34.00	0.00	-30.90	69.20	-	-	74	-4.80	317	208	H
			* 5.150000	43.72	RMS	34.10	0.10	-30.80	47.12	54	-6.88	-	-	317	208	H
			* 5.122953	45.44	RMS	34.00	0.10	-30.90	48.64	54	-5.36	-	-	317	208	H
			* 5.150000	52.86	Pk	34.10	0.00	-30.80	56.16	-	-	74	-17.84	4	101	V
			* 5.122641	60.94	Pk	34.00	0.00	-30.90	64.04	-	-	74	-9.96	4	101	V
		5	* 5.150000	40.94	RMS	34.10	0.10	-30.80	44.34	54	-9.66	-	-	4	101	V
			* 5.120015	42.12	RMS	34.00	0.10	-30.90	45.32	54	-8.68	-	-	4	101	V
			* 5.150000	58.22	Pk	34.10	0.00	-30.80	61.52	-	-	74	-12.48	322	179	H
			* 5.122828	65.91	Pk	34.00	0.00	-30.90	69.01	-	-	74	-4.99	322	179	H
			* 5.150000	43.85	RMS	34.10	0.10	-30.80	47.25	54	-6.75	-	-	322	179	H
			* 5.122828	46.58	RMS	34.00	0.10	-30.90	49.78	54	-4.22	-	-	322	179	H
			* 5.150000	53.79	Pk	34.10	0.00	-30.80	57.09	-	-	74	-16.91	56	206	V
			* 5.118953	60.78	Pk	34.00	0.00	-30.90	63.88	-	-	74	-10.12	56	206	V
			* 5.150000	40.59	RMS	34.10	0.10	-30.80	43.99	54	-10.01	-	-	56	206	V
			* 5.118453	42.42	RMS	34.00	0.10	-30.90	45.62	54	-8.38	-	-	56	206	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.2. 802.11n/ac MIMO MODE IN UNII-1 BAND – BANDEDGE

UNII-1 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filtr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
HT20	5180	6+5	* 5.149307	66.64	Pk	34.20	0.00	-32.69	68.15	-	-	74	-5.85	63	121	H
			* 5.149862	49.12	RMS	34.20	0.00	-32.70	50.62	54	-3.38	-	-	63	121	H
			* 5.150000	66.35	Pk	34.20	0.00	-32.70	67.85	-	-	74	-6.15	63	121	H
			* 5.150000	47.74	RMS	34.20	0.00	-32.70	49.24	54	-4.76	-	-	63	121	H
			* 5.150000	53.21	Pk	34.20	0.00	-32.70	54.71	-	-	74	-19.29	135	297	V
			* 5.002917	57.30	Pk	34.00	0.00	-32.67	58.63	-	-	74	-15.37	135	297	V
			* 5.150000	43.28	RMS	34.20	0.00	-32.70	44.78	54	-9.22	-	-	135	297	V
			* 5.003278	45.36	RMS	34.00	0.00	-32.67	46.69	54	-7.31	-	-	135	297	V
HT40	5190	6+5	* 5.150000	65.29	Pk	34.10	0.00	-30.80	68.59	-	-	74	-5.41	329	158	H
			* 5.149957	65.41	Pk	34.10	0.00	-30.80	68.71	-	-	74	-5.29	329	158	H
			* 5.150000	45.56	RMS	34.10	0.00	-30.80	48.86	54	-5.14	-	-	329	158	H
			* 5.146425	46.07	RMS	34.10	0.00	-30.90	49.27	54	-4.73	-	-	329	158	H
			* 5.150000	57.61	Pk	34.10	0.00	-30.80	60.91	-	-	74	-13.09	15	135	V
			* 5.149582	59.56	Pk	34.10	0.00	-30.80	62.86	-	-	74	-11.14	15	135	V
			* 5.150000	42.27	RMS	34.10	0.00	-30.80	45.57	54	-8.43	-	-	15	135	V
			* 5.149644	42.66	RMS	34.10	0.00	-30.80	45.96	54	-8.04	-	-	15	135	V
VHT80	5210	6+5	* 5.150000	68.05	Pk	34.40	0.00	-34.40	68.05	-	-	74	-5.95	197	147	H
			* 5.140862	68.84	Pk	34.40	0.00	-34.40	68.84	-	-	74	-5.16	197	147	H
			* 5.150000	47.55	RMS	34.40	0.00	-34.40	47.55	54	-6.45	-	-	197	147	H
			* 5.145800	50.79	RMS	34.40	0.00	-34.40	50.79	54	-3.21	-	-	197	147	H
			* 5.150000	64.07	Pk	34.40	0.00	-34.40	64.07	-	-	74	-9.93	251	134	V
			* 5.149894	64.78	Pk	34.40	0.00	-34.40	64.78	-	-	74	-9.22	251	134	V
			* 5.150000	45.15	RMS	34.40	0.00	-34.40	45.15	54	-8.85	-	-	251	134	V
			* 5.149769	46.43	RMS	34.40	0.00	-34.40	46.43	54	-7.57	-	-	251	134	V
VHT160	5250 (Straddle)	6+5	* 5.150000	57.05	Pk	34.10	0.00	-30.80	60.35	-	-	74	-13.65	320	103	H
			* 5.121703	66.25	Pk	34.00	0.00	-30.90	69.35	-	-	74	-4.65	320	103	H
			* 5.150000	41.83	RMS	34.10	0.10	-30.80	45.23	54	-8.77	-	-	320	103	H
			* 5.117015	45.61	RMS	34.00	0.10	-30.90	48.81	54	-5.19	-	-	320	103	H
			* 5.150000	53.57	Pk	34.10	0.00	-30.80	56.87	-	-	74	-17.13	21	127	V
			* 5.119859	59.97	Pk	34.00	0.00	-30.90	63.07	-	-	74	-10.93	21	127	V
			* 5.150000	41.18	RMS	34.10	0.10	-30.80	44.58	54	-9.42	-	-	21	127	V
			* 5.149894	41.86	RMS	34.10	0.10	-30.80	45.26	54	-8.74	-	-	21	127	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.3. 802.11be SISO SU MODE IN UNII-1 BAND – BANDEDGE

20MHz

UNII-1 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 SU Mode	5180	6	* 5.150000	66.54	Pk	34.40	0.00	-36.02	64.92	-	-	74	-9.08	97	147	H
			* 5.149751	70.91	Pk	34.40	0.00	-36.02	69.29	-	-	74	-4.71	97	147	H
			* 5.150000	52.51	RMS	34.40	0.00	-36.02	50.89	54	-3.11	-	-	97	147	H
			* 5.149779	53.12	RMS	34.40	0.00	-36.02	51.50	54	-2.50	-	-	97	147	H
			* 5.150000	62.63	Pk	34.40	0.00	-36.02	61.01	-	-	74	-12.99	153	104	V
			* 5.147835	64.85	Pk	34.40	0.00	-36.03	63.22	-	-	74	-10.78	153	104	V
		5	* 5.150000	49.22	RMS	34.40	0.00	-36.02	47.60	54	-6.40	-	-	153	104	V
			* 5.149890	49.57	RMS	34.40	0.00	-36.02	47.95	54	-6.05	-	-	153	104	V
			* 5.150000	65.82	Pk	34.40	0.00	-35.40	64.82	-	-	74	-9.18	269	209	H
			* 5.149279	70.14	Pk	34.40	0.00	-35.40	69.14	-	-	74	-4.86	269	209	H
			* 5.150000	51.35	RMS	34.40	0.00	-35.40	50.35	54	-3.65	-	-	269	209	H
			* 5.149890	52.35	RMS	34.40	0.00	-35.40	51.35	54	-2.65	-	-	269	209	H
			* 5.150000	57.52	Pk	34.40	0.00	-35.40	56.52	-	-	74	-17.48	269	209	V
			* 5.148223	60.06	Pk	34.40	0.00	-35.40	59.06	-	-	74	-14.94	269	209	V
			* 5.150000	46.25	RMS	34.40	0.00	-35.40	45.25	54	-8.75	-	-	269	209	V
			* 5.149779	46.73	RMS	34.40	0.00	-35.40	45.73	54	-8.27	-	-	269	209	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

40MHz

UNII-1 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT40 SU Mode	5190	6	* 5.150000	71.15	Pk	34.60	0.00	-39.00	66.75	-	-	74	-7.25	283	125	H
			* 5.149140	73.14	Pk	34.60	0.00	-39.00	68.74	-	-	74	-5.26	283	125	H
			* 5.150000	50.74	RMS	34.60	0.00	-39.00	46.34	54	-7.66	-	-	283	125	H
			* 5.149918	52.51	RMS	34.60	0.00	-39.00	48.11	54	-5.89	-	-	283	125	H
			* 5.150000	63.95	Pk	34.60	0.00	-39.00	59.55	-	-	74	-14.45	324	116	V
			* 5.149473	65.04	Pk	34.60	0.00	-39.00	60.64	-	-	74	-13.36	324	116	V
		5	* 5.150000	47.47	RMS	34.60	0.00	-39.00	43.07	54	-10.93	-	-	324	116	V
			* 5.149529	48.76	RMS	34.60	0.00	-39.00	44.36	54	-9.64	-	-	324	116	V
			* 5.150000	62.95	Pk	34.10	0.00	-30.80	66.25	-	-	74	-7.75	343	366	H
			* 5.149738	65.72	Pk	34.10	0.00	-30.80	69.02	-	-	74	-4.98	343	366	H
			* 5.150000	44.71	RMS	34.10	0.00	-30.80	48.01	54	-5.99	-	-	343	366	H
			* 5.148863	45.82	RMS	34.10	0.00	-30.90	49.02	54	-4.98	-	-	343	366	H
			* 5.150000	62.91	Pk	34.10	0.00	-30.80	66.21	-	-	74	-7.79	293	329	V
			* 5.148613	65.36	Pk	34.10	0.00	-30.90	68.56	-	-	74	-5.44	293	329	V
			* 5.150000	44.32	RMS	34.10	0.00	-30.80	47.62	54	-6.38	-	-	293	329	V
			* 5.149207	45.21	RMS	34.10	0.00	-30.80	48.51	54	-5.49	-	-	293	329	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

80MHz

UNII-1 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT80 SU Mode	5210	6	* 5.150000	67.86	Pk	34.00	0.00	-35.43	66.43	-	-	74	-7.57	139	117	H
			* 5.149057	70.77	Pk	34.00	0.00	-35.44	69.33	-	-	74	-4.67	139	117	H
			* 5.150000	51.45	RMS	34.00	0.00	-35.43	50.02	54	-3.98	-	-	139	117	H
			* 5.149807	52.47	RMS	34.00	0.00	-35.43	51.04	54	-2.96	-	-	139	117	H
			* 5.150000	61.13	Pk	34.00	0.00	-35.43	59.70	-	-	74	-14.30	179	103	V
			* 5.149501	64.59	Pk	34.00	0.00	-35.43	63.16	-	-	74	-10.84	179	103	V
		5	* 5.150000	47.07	RMS	34.00	0.00	-35.43	45.64	54	-8.36	-	-	179	103	V
			* 5.148640	47.70	RMS	34.00	0.00	-35.44	46.26	54	-7.74	-	-	179	103	V
			* 5.150000	68.01	Pk	34.40	0.00	-36.02	66.39	-	-	74	-7.61	296	212	H
			* 5.149640	70.82	Pk	34.40	0.00	-36.02	69.20	-	-	74	-4.80	296	212	H
			* 5.150000	51.16	RMS	34.40	0.00	-36.02	49.54	54	-4.46	-	-	296	212	H
			* 5.146223	52.03	RMS	34.40	0.00	-36.04	50.39	54	-3.61	-	-	296	212	H
			* 5.150000	59.74	Pk	34.40	0.00	-36.02	58.12	-	-	74	-15.88	15	151	V
			* 5.149946	63.15	Pk	34.40	0.00	-36.02	61.53	-	-	74	-12.47	15	151	V
			* 5.150000	46.91	RMS	34.40	0.00	-36.02	45.29	54	-8.71	-	-	15	151	V
			* 5.149529	47.16	RMS	34.40	0.00	-36.02	45.54	54	-8.46	-	-	15	151	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

160MHz

UNII-1 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT160 SU Mode	5250 (Straddle)	6	* 5.150000	58.95	Pk	34.30	0.00	-32.62	60.63	-	-	74	-13.37	157	102	H
			* 5.124307	63.02	Pk	34.30	0.00	-32.66	64.66	-	-	74	-9.34	157	102	H
			* 5.150000	45.31	RMS	34.30	0.14	-32.62	47.13	54	-6.87	-	-	157	102	H
			* 5.121362	49.13	RMS	34.30	0.14	-32.67	50.90	54	-3.10	-	-	157	102	H
			* 5.150000	55.03	Pk	34.30	0.00	-32.62	56.71	-	-	74	-17.29	182	102	V
			* 5.125890	58.32	Pk	34.30	0.00	-32.67	59.95	-	-	74	-14.05	182	102	V
		5	* 5.150000	44.09	RMS	34.30	0.14	-32.62	45.91	54	-8.09	-	-	182	102	V
			* 5.123529	46.06	RMS	34.30	0.14	-32.68	47.82	54	-6.18	-	-	182	102	V
			* 5.150000	68.27	Pk	34.40	0.00	-35.40	67.27	-	-	74	-6.73	265	198	H
			* 5.125584	70.09	Pk	34.40	0.00	-35.50	68.99	-	-	74	-5.01	265	198	H
			* 5.150000	51.15	RMS	34.40	0.14	-35.40	50.29	54	-3.71	-	-	265	198	H
			* 5.135807	52.12	RMS	34.40	0.14	-35.40	51.26	54	-2.74	-	-	265	198	H
			* 5.150000	64.02	Pk	34.40	0.00	-35.40	63.02	-	-	74	-10.98	316	136	V
			* 5.125168	66.71	Pk	34.40	0.00	-35.50	65.61	-	-	74	-8.39	316	136	V
			* 5.150000	48.76	RMS	34.40	0.14	-35.40	47.90	54	-6.10	-	-	316	136	V
			* 5.149279	49.93	RMS	34.40	0.14	-35.40	49.07	54	-4.93	-	-	316	136	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.4. 802.11be SISO PARTIAL RU MODE IN UNII-1 BAND – BANDEDGE

UNII-1 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filt/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 26T - RU0	5180	6	* 5.150000	63.65	Pk	34.60	0.00	-39.00	59.25	-	-	74	-14.75	97	110	H
			* 5.147946	68.50	Pk	34.60	0.00	-39.00	64.10	-	-	74	-9.90	97	110	H
			* 5.150000	47.79	RMS	34.60	0.00	-39.00	43.39	54	-10.61	-	-	97	110	H
			* 5.146779	48.83	RMS	34.60	0.00	-39.00	44.43	54	-9.57	-	-	97	110	H
			* 5.150000	58.47	Pk	34.60	0.00	-39.00	54.07	-	-	74	-19.93	122	116	V
			* 5.147890	63.54	Pk	34.60	0.00	-39.00	59.14	-	-	74	-14.86	122	116	V
		5	* 5.150000	46.86	RMS	34.60	0.00	-39.00	42.46	54	-11.54	-	-	122	116	V
			* 5.001917	48.34	RMS	34.50	0.00	-39.10	43.74	54	-10.26	-	-	122	116	V
			* 5.150000	58.14	Pk	34.30	0.00	-37.11	55.33	-	-	74	-18.67	294	214	H
			* 5.148612	62.03	Pk	34.30	0.00	-37.10	59.23	-	-	74	-14.77	294	214	H
			* 5.150000	46.22	RMS	34.30	0.00	-37.11	43.41	54	-10.59	-	-	294	214	H
			* 5.140529	47.31	RMS	34.30	0.00	-37.14	44.47	54	-9.53	-	-	294	214	H
			* 5.150000	55.53	Pk	34.30	0.00	-37.11	52.72	-	-	74	-21.28	4	188	V
			* 5.149890	58.57	Pk	34.30	0.00	-37.11	55.76	-	-	74	-18.24	4	188	V
			* 5.150000	46.12	RMS	34.30	0.00	-37.11	43.31	54	-10.69	-	-	4	188	V
			* 5.143057	46.85	RMS	34.30	0.00	-37.12	44.03	54	-9.97	-	-	4	188	V
EHT80 484+242T - RU93	5210	6	* 5.150000	71.25	Pk	34.50	0.00	-37.62	68.13	-	-	74	-5.87	293	244	H
			* 5.147112	72.43	Pk	34.50	0.00	-37.56	69.37	-	-	74	-4.63	293	244	H
			* 5.150000	49.33	RMS	34.50	0.00	-37.62	46.21	54	-7.79	-	-	293	244	H
			* 5.147196	51.85	RMS	34.50	0.00	-37.57	48.78	54	-5.22	-	-	293	244	H
			* 5.150000	56.79	Pk	34.50	0.00	-37.62	53.67	-	-	74	-20.33	25	142	V
			* 5.142946	59.20	Pk	34.50	0.00	-37.59	56.11	-	-	74	-17.89	25	142	V
			* 5.150000	46.97	RMS	34.50	0.00	-37.62	43.85	54	-10.15	-	-	25	142	V
			* 5.133501	47.33	RMS	34.50	0.00	-37.60	44.23	54	-9.77	-	-	25	142	V
		5	* 5.150000	71.89	Pk	34.50	0.00	-37.62	68.77	-	-	74	-5.23	142	202	H
			* 5.147029	72.33	Pk	34.50	0.00	-37.56	69.27	-	-	74	-4.73	142	202	H
			* 5.150000	49.58	RMS	34.50	0.00	-37.62	46.46	54	-7.54	-	-	142	202	H
			* 5.149918	52.09	RMS	34.50	0.00	-37.62	48.97	54	-5.03	-	-	142	202	H
			* 5.150000	67.42	Pk	34.50	0.00	-37.62	64.30	-	-	74	-9.70	188	119	V
			* 5.149668	68.51	Pk	34.50	0.00	-37.62	65.39	-	-	74	-8.61	188	119	V
EHT160 996+484+ 242T - S99	5250 (Straddle)	6	* 5.150000	48.11	RMS	34.50	0.00	-37.62	44.99	54	-9.01	-	-	188	119	V
			* 5.147140	49.96	RMS	34.50	0.00	-37.56	46.90	54	-7.10	-	-	188	119	V
			* 5.150000	64.84	Pk	34.50	0.00	-37.62	61.72	-	-	74	-12.28	281	103	H
			* 5.136973	72.63	Pk	34.50	0.00	-37.66	69.47	-	-	74	-4.53	281	103	H
			* 5.150000	49.75	RMS	34.50	0.00	-37.62	46.63	54	-7.37	-	-	281	103	H
			* 5.138390	51.89	RMS	34.50	0.00	-37.65	48.74	54	-5.26	-	-	281	103	H
			* 5.150000	59.07	Pk	34.50	0.00	-37.62	55.95	-	-	74	-18.05	338	123	V
			* 5.136862	64.77	Pk	34.50	0.00	-37.66	61.61	-	-	74	-12.39	338	123	V
		5	* 5.150000	47.91	RMS	34.50	0.00	-37.62	44.79	54	-9.21	-	-	338	123	V
			* 5.149807	48.38	RMS	34.50	0.00	-37.62	45.26	54	-8.74	-	-	338	123	V
			* 5.150000	64.57	Pk	34.50	0.00	-37.62	61.45	-	-	74	-12.55	276	195	H
			* 5.136723	72.16	Pk	34.50	0.00	-37.65	69.01	-	-	74	-4.99	276	195	H
			* 5.150000	48.72	RMS	34.50	0.00	-37.62	45.60	54	-8.40	-	-	276	195	H
			* 5.136501	51.14	RMS	34.50	0.00	-37.65	47.99	54	-6.01	-	-	276	195	H
			* 5.150000	61.22	Pk	34.50	0.00	-37.62	58.10	-	-	74	-15.90	331	150	V
			* 5.136418	66.07	Pk	34.50	0.00	-37.64	62.93	-	-	74	-11.07	331	150	V
			* 5.150000	48.12	RMS	34.50	0.00	-37.62	45.00	54	-9.00	-	-	331	150	V
			* 5.149501	48.68	RMS	34.50	0.00	-37.62	45.56	54	-8.44	-	-	331	150	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.5. 802.11be MIMO SU MODE IN UNII-1 BAND – BANDEDGE

UNII-1 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filtr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 SU Mode	5180	6+5	* 5.150000	71.33	Pk	34.00	0.00	-35.43	69.90	-	-	74	-4.10	130	120	H
			* 5.149751	70.20	Pk	34.00	0.00	-35.43	68.77	-	-	74	-5.23	130	120	H
			* 5.150000	52.36	RMS	34.00	0.00	-35.43	50.93	54	-3.07	-	-	130	120	H
			* 5.149835	52.89	RMS	34.00	0.00	-35.43	51.46	54	-2.54	-	-	130	120	H
			* 5.150000	62.94	Pk	34.00	0.00	-35.43	61.51	-	-	74	-12.49	164	111	V
			* 5.149446	65.38	Pk	34.00	0.00	-35.44	63.94	-	-	74	-10.06	164	111	V
			* 5.150000	48.03	RMS	34.00	0.00	-35.43	46.60	54	-7.40	-	-	164	111	V
			* 5.149890	49.05	RMS	34.00	0.00	-35.43	47.62	54	-6.38	-	-	164	111	V
EHT40 SU Mode	5190	6+5	* 5.150000	65.03	Pk	34.30	0.00	-32.62	66.71	-	-	74	-7.29	150	105	H
			* 5.146890	67.31	Pk	34.30	0.00	-32.62	68.99	-	-	74	-5.01	150	105	H
			* 5.150000	47.09	RMS	34.30	0.00	-32.62	48.77	54	-5.23	-	-	150	105	H
			* 5.146751	48.55	RMS	34.30	0.00	-32.62	50.23	54	-3.77	-	-	150	105	H
			* 5.150000	61.55	Pk	34.30	0.00	-32.62	63.23	-	-	74	-10.77	194	102	V
			* 5.149835	62.32	Pk	34.30	0.00	-32.62	64.00	-	-	74	-10.00	194	102	V
			* 5.150000	45.07	RMS	34.30	0.00	-32.62	46.75	54	-7.25	-	-	194	102	V
			* 5.149890	46.32	RMS	34.30	0.00	-32.62	48.00	54	-6	-	-	194	102	V
EHT80 SU Mode	5210	6+5	* 5.150000	61.39	Pk	34.10	0.00	-30.80	64.69	-	-	74	-9.31	322	164	H
			* 5.149863	65.75	Pk	34.10	0.00	-30.80	69.05	-	-	74	-4.95	322	164	H
			* 5.150000	45.04	RMS	34.10	0.00	-30.80	48.34	54	-5.66	-	-	322	164	H
			* 5.145456	45.94	RMS	34.10	0.00	-30.80	49.24	54	-4.76	-	-	322	164	H
			* 5.150000	56.08	Pk	34.10	0.00	-30.80	59.38	-	-	74	-14.62	23	101	V
			* 5.149394	60.09	Pk	34.10	0.00	-30.80	63.39	-	-	74	-10.61	23	101	V
			* 5.150000	42.10	RMS	34.10	0.00	-30.80	45.40	54	-8.60	-	-	23	101	V
			* 5.149550	42.63	RMS	34.10	0.00	-30.80	45.93	54	-8.07	-	-	23	101	V
EHT160 SU Mode	5250 (Straddle)	6+5	* 5.150000	67.88	Pk	34.50	0.00	-37.62	64.76	-	-	74	-9.24	280	240	H
			* 5.145112	69.41	Pk	34.50	0.00	-37.54	66.37	-	-	74	-7.63	280	240	H
			* 5.150000	52.80	RMS	34.50	0.14	-37.62	49.82	54	-4.18	-	-	280	240	H
			* 5.145112	53.52	RMS	34.50	0.14	-37.54	50.62	54	-3.38	-	-	280	240	H
			* 5.150000	60.45	Pk	34.50	0.00	-37.62	57.33	-	-	74	-16.67	337	106	V
			* 5.149196	65.35	Pk	34.50	0.00	-37.61	62.24	-	-	74	-11.76	337	106	V
			* 5.150000	49.01	RMS	34.50	0.14	-37.62	46.03	54	-7.97	-	-	337	106	V
			* 5.139529	50.02	RMS	34.50	0.14	-37.63	47.03	54	-6.97	-	-	337	106	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

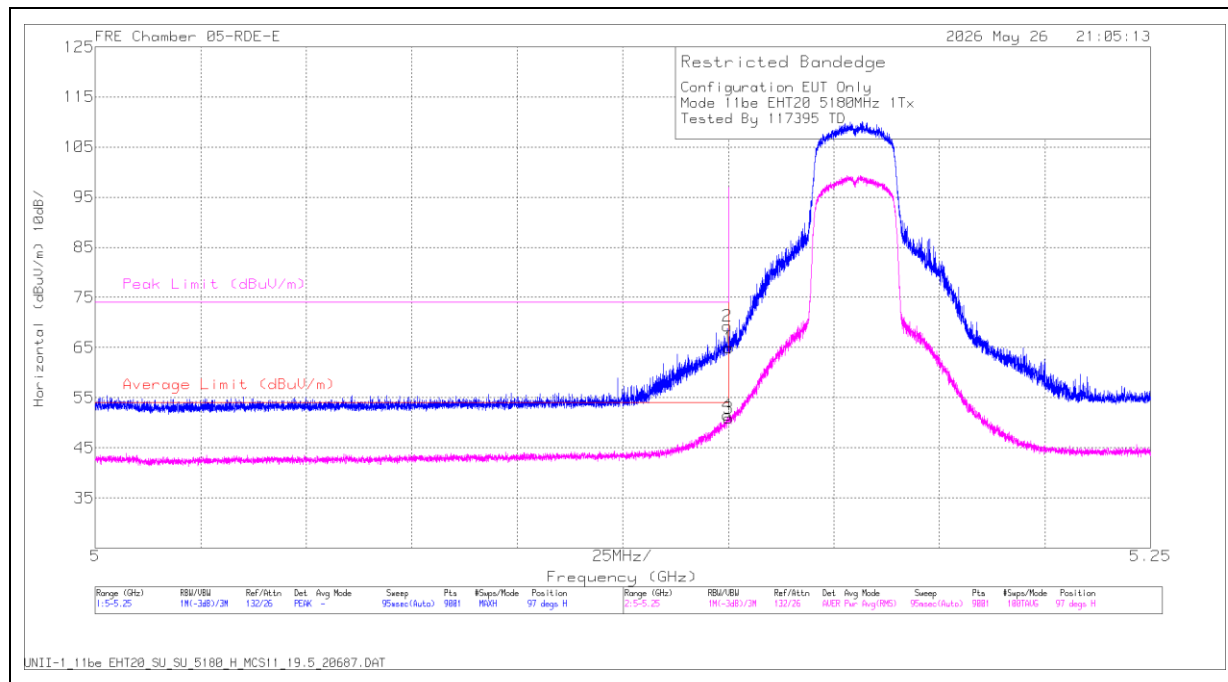
1.1.6. 802.11be MIMO PARTIAL RU MODE IN UNII-1 BAND – BANDEDGE

UNII-1 (MIMO CDD)	Channel Frequency MHz	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filtr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 26T - RU0	5180	6+5	* 5.150000	65.68	Pk	34.30	0.00	-40.10	59.88	-	-	74	-14.12	336	111	H
			* 5.145223	67.53	Pk	34.30	0.00	-40.10	61.73	-	-	74	-12.27	336	111	H
			* 5.150000	49.03	RMS	34.30	0.00	-40.10	43.23	54	-10.77	-	-	336	111	H
			* 5.146835	50.19	RMS	34.30	0.00	-40.18	44.31	54	-9.69	-	-	336	111	H
			* 5.150000	60.74	Pk	34.30	0.00	-40.10	54.94	-	-	74	-19.06	13	101	V
			* 5.148446	64.97	Pk	34.30	0.00	-39.96	59.31	-	-	74	-14.69	13	101	V
			* 5.150000	48.36	RMS	34.30	0.00	-40.10	42.56	54	-11.44	-	-	13	101	V
			* 5.149085	49.15	RMS	34.30	0.00	-39.92	43.53	54	-10.47	-	-	13	101	V
EHT80 484+242T - RU93	5210	6+5	* 5.150000	70.80	Pk	34.50	0.00	-37.62	67.68	-	-	74	-6.32	113	231	H
			* 5.149946	72.24	Pk	34.50	0.00	-37.62	69.12	-	-	74	-4.88	113	231	H
			* 5.150000	51.72	RMS	34.50	0.00	-37.62	48.60	54	-5.40	-	-	113	231	H
			* 5.144807	53.10	RMS	34.50	0.00	-37.55	50.05	54	-3.95	-	-	113	231	H
			* 5.150000	57.88	Pk	34.50	0.00	-37.62	54.76	-	-	74	-19.24	170	198	V
			* 5.147390	65.56	Pk	34.50	0.00	-37.57	62.49	-	-	74	-11.51	170	198	V
			* 5.150000	46.91	RMS	34.50	0.00	-37.62	43.79	54	-10.21	-	-	170	198	V
			* 5.147196	48.39	RMS	34.50	0.00	-37.57	45.32	54	-8.68	-	-	170	198	V
EHT160 996+484+ 242T - S99	5250 (Straddle)	6+5	* 5.150000	67.94	Pk	34.70	0.00	-38.61	64.03	-	-	74	-9.97	274	173	H
			* 5.139251	73.27	Pk	34.60	0.00	-38.64	69.23	-	-	74	-4.77	274	173	H
			* 5.150000	54.68	RMS	34.70	0.00	-38.61	50.77	54	-3.23	-	-	274	173	H
			* 5.149946	55.27	RMS	34.70	0.00	-38.61	51.36	54	-2.64	-	-	274	173	H
			* 5.150000	58.91	Pk	34.70	0.00	-38.61	55.00	-	-	74	-19.00	325	121	V
			* 5.138001	64.03	Pk	34.60	0.00	-38.65	59.98	-	-	74	-14.02	325	121	V
			* 5.150000	48.40	RMS	34.70	0.00	-38.61	44.49	54	-9.51	-	-	325	121	V
			* 5.143334	50.12	RMS	34.70	0.00	-38.66	46.16	54	-7.84	-	-	325	121	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

WORST-CASE BANDEDGE (LOW CHANNEL)**802.11be EHT20 / 5180 MHz / SISO 1TX /SU****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/Filtr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.150000	66.54	Pk	34.40	0.00	-36.02	64.92	-	-	74	-9.08	97	147	H
2	* 5.149751	70.91	Pk	34.40	0.00	-36.02	69.29	-	-	74	-4.71	97	147	H
3	* 5.150000	52.51	RMS	34.40	0.00	-36.02	50.89	54	-3.11	-	-	97	147	H
4	* 5.149779	53.12	RMS	34.40	0.00	-36.02	51.50	54	-2.5	-	-	97	147	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.7. 802.11n/ac MIMO MODE IN UNII-1 BAND – SPURIOUS EMISSIONS**20MHz**

UNII-1 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
HT20	5180	6+5	10.357514	54.90	PK-U	37.60	0.00	-44.91	47.59	-	-	68.2	-20.61	0	200	V
			10.385285	54.84	PK-U	37.60	0.00	-44.51	47.93	-	-	68.2	-20.27	0	101	H
			* 15.546208	38.73	ADR	40.70	0.00	-40.86	38.57	54	-15.43	-	-	0	200	V
			* 15.550457	50.52	PK-U	40.80	0.00	-40.73	50.59	-	-	74	-23.41	0	200	V
			* 15.551577	50.78	PK-U	40.80	0.00	-40.73	50.85	-	-	74	-23.15	0	200	H
			* 15.559946	38.69	ADR	40.80	0.00	-40.66	38.83	54	-15.17	-	-	0	200	H
			* 17.969132	47.14	PK-U	42.10	0.00	-35.74	53.5	-	-	74	-20.5	0	200	V
			* 17.970459	35.08	ADR	42.10	0.00	-35.67	41.51	54	-12.49	-	-	0	101	H
			* 17.979589	35.56	ADR	42.10	0.00	-35.51	42.15	54	-11.85	-	-	0	200	V
			* 17.999499	46.85	PK-U	42.10	0.00	-35.79	53.16	-	-	74	-20.84	0	101	H
	5200		10.373104	54.61	PK-U	37.60	0.00	-44.60	47.61	-	-	68.2	-20.59	0	101	H
			10.390179	54.75	PK-U	37.60	0.00	-44.35	48	-	-	68.2	-20.2	0	101	V
			* 15.586694	38.46	ADR	40.80	0.00	-40.93	38.33	54	-15.67	-	-	0	199	V
			* 15.590481	50.02	PK-U	40.80	0.00	-40.85	49.97	-	-	74	-24.03	0	101	H
			* 15.602254	49.87	PK-U	40.80	0.00	-40.75	49.92	-	-	74	-24.08	0	199	V
			* 15.624503	38.26	ADR	40.90	0.00	-40.57	38.59	54	-15.41	-	-	0	101	H
			* 17.966541	46.85	PK-U	42.10	0.00	-35.68	53.27	-	-	74	-20.73	0	199	V
			* 17.966955	35.37	ADR	42.10	0.00	-35.67	41.8	54	-12.2	-	-	0	101	H
			* 17.970954	35.41	ADR	42.10	0.00	-35.66	41.85	54	-12.15	-	-	0	199	V
			* 17.978742	47.02	PK-U	42.10	0.00	-35.51	53.61	-	-	74	-20.39	0	101	H
	5240		10.465924	55.06	PK-U	37.60	0.00	-44.40	48.26	-	-	68.2	-19.94	0	101	V
			10.471924	54.30	PK-U	37.60	0.00	-44.46	47.44	-	-	68.2	-20.76	0	200	H
			* 15.726184	37.88	ADR	41.00	0.00	-40.88	38	54	-16	-	-	0	200	V
			* 15.726491	50.05	PK-U	41.00	0.00	-40.87	50.18	-	-	74	-23.82	0	101	H
			* 15.730398	49.61	PK-U	41.00	0.00	-40.84	49.77	-	-	74	-24.23	0	200	V
			* 15.743237	38.24	ADR	41.00	0.00	-40.71	38.53	54	-15.47	-	-	0	101	H
			* 17.973109	35.23	ADR	42.10	0.00	-35.63	41.7	54	-12.3	-	-	0	200	H
			* 17.973320	35.31	ADR	42.10	0.00	-35.63	41.78	54	-12.22	-	-	0	200	V
			* 17.974711	47.30	PK-U	42.10	0.00	-35.61	53.79	-	-	74	-20.21	0	200	V
			* 17.978304	47.20	PK-U	42.10	0.00	-35.53	53.77	-	-	74	-20.23	0	200	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

40MHz

UNII-1 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filtr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
HT40	5190	6+5	* 3.801222	45.60	ADR	33.30	0.00	-47.01	31.89	54	-22.11	-	-	30	139	V
			* 3.808656	57.39	PK-U	33.30	0.00	-47.31	43.38	-	-	74	-30.62	167	341	H
			* 3.809316	45.83	ADR	33.30	0.00	-47.32	31.81	54	-22.19	-	-	167	341	H
			* 3.825396	57.66	PK-U	33.40	0.00	-47.07	43.99	-	-	74	-30.01	30	139	V
			10.299424	55.83	PK-U	37.50	0.00	-45.27	48.06	-	-	68.2	-20.14	200	346	V
			10.319666	56.33	PK-U	37.50	0.00	-44.99	48.84	-	-	68.2	-19.36	97	376	H
			17.640749	48.53	PK-U	42.00	0.00	-35.64	54.89	-	-	68.2	-13.31	95	389	V
			17.648495	47.76	PK-U	42.00	0.00	-35.50	54.26	-	-	68.2	-13.94	351	357	H
			3.031926	58.44	PK-U	32.90	0.00	-47.61	43.73	-	-	68.2	-24.47	129	125	V
	5230		3.034722	58.56	PK-U	32.90	0.00	-47.63	43.83	-	-	68.2	-24.37	94	139	H
			* 9.402372	55.47	PK-U	36.60	0.00	-45.05	47.02	-	-	74	-26.98	289	341	H
			* 9.418802	44.10	ADR	36.60	0.00	-44.78	35.92	54	-18.08	-	-	195	389	V
			* 9.436313	55.66	PK-U	36.60	0.00	-45.05	47.21	-	-	74	-26.79	195	389	V
			* 9.436376	43.72	ADR	36.60	0.00	-45.04	35.28	54	-18.72	-	-	289	341	H
			17.645958	47.79	PK-U	42.00	0.00	-35.58	54.21	-	-	68.2	-13.99	198	399	H
			17.664102	47.19	PK-U	42.00	0.00	-36.57	52.62	-	-	68.2	-15.58	12	381	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

80MHz

UNII-1 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filtr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
VHT80	5210	6+5	3.032540	59.09	PK-U	32.90	0.00	-47.62	44.37	-	-	68.2	-23.83	10	253	V
			3.041551	58.69	PK-U	32.90	0.00	-47.69	43.90	-	-	68.2	-24.3	225	326	H
			* 12.168579	52.42	PK-U	39.00	0.00	-41.96	49.46	-	-	74	-24.54	75	363	H
			* 12.187943	41.48	ADR	39.00	0.00	-41.75	38.73	54	-15.27	-	-	92	394	V
			* 12.193232	40.96	ADR	39.00	0.00	-41.78	38.18	54	-15.82	-	-	75	363	H
			* 12.200965	53.48	PK-U	39.00	0.00	-41.88	50.60	-	-	74	-23.4	92	394	V
			* 17.927687	46.59	PK-U	42.10	0.00	-35.64	53.05	-	-	74	-20.95	299	392	H
			* 17.931508	47.27	PK-U	42.10	0.00	-35.51	53.86	-	-	74	-20.14	344	389	V
			* 17.933083	35.02	ADR	42.10	0.00	-35.49	41.63	54	-12.37	-	-	299	392	H
			* 17.933620	35.27	ADR	42.10	0.00	-35.45	41.92	54	-12.08	-	-	344	389	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

160MHz

UNII-1 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filtr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
VHT160	5250 (Straddle)	6+5	8.997372	55.32	PK-U	36.20	0.00	-44.54	46.98	-	-	68.2	-21.22	0	200	V
			* 9.000900	43.19	ADR	36.20	0.00	-44.47	34.92	54	-19.08	-	-	0	101	H
			* 9.030625	54.88	PK-U	36.20	0.00	-44.36	46.72	-	-	74	-27.28	0	101	H
			10.483082	53.95	PK-U	37.60	0.00	-44.57	46.98	-	-	68.2	-21.22	0	101	V
			10.496838	54.36	PK-U	37.60	0.00	-44.83	47.13	-	-	68.2	-21.07	0	101	H
			* 15.722720	48.97	PK-U	41.00	0.00	-40.86	49.11	-	-	74	-24.89	0	101	H
			* 15.732164	37.59	ADR	41.00	0.00	-40.77	37.82	54	-16.18	-	-	0	101	H
			* 15.743448	37.43	ADR	41.00	0.00	-40.71	37.72	54	-16.28	-	-	0	200	V
			* 15.743990	49.02	PK-U	41.00	0.00	-40.71	49.31	-	-	74	-24.69	0	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.1.8. 802.11be MIMO SU MODE IN UNII-1 BAND – SPURIOUS EMISSIONS

20MHz

UNII-1 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fltr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 SU Mode	5180	6+5	2.424522	58.28	PK-U	32.30	0.00	-47.27	43.31	-	-	68.2	-24.89	1	101	H
			4.424088	56.32	PK-U	34.20	0.00	-45.32	45.20	-	-	68.2	-23	1	200	H
			2.416750	58.63	PK-U	32.30	0.00	-47.29	43.64	-	-	68.2	-24.56	1	200	V
			4.424403	56.35	PK-U	34.20	0.00	-45.33	45.22	-	-	68.2	-22.98	1	101	V
			10.207546	55.46	PK-U	37.20	0.00	-42.62	50.04	-	-	68.2	-18.16	1	101	H
			10.220150	54.60	PK-U	37.30	0.00	-42.79	49.11	-	-	68.2	-19.09	1	200	V
	5200		2.478851	57.37	PK-U	32.40	0.00	-47.08	42.69	-	-	68.2	-25.51	0	101	H
			* 4.534636	55.73	PK-U	34.00	0.00	-45.19	44.54	-	-	74	-29.46	0	199	H
			* 4.538596	44.12	ADR	34.00	0.00	-45.19	32.93	54	-21.07	-	-	0	199	H
			* 4.541465	44.14	ADR	34.00	0.00	-45.26	32.88	54	-21.12	-	-	0	199	V
			2.466459	57.66	PK-U	32.40	0.00	-47.06	43.00	-	-	68.2	-25.2	0	199	V
			* 4.538371	55.86	PK-U	34.00	0.00	-45.19	44.67	-	-	74	-29.33	0	199	V
	5240		10.210387	55.53	PK-U	37.20	0.00	-42.78	49.95	-	-	68.2	-18.25	0	101	H
			10.198286	54.99	PK-U	37.20	0.00	-42.45	49.74	-	-	68.2	-18.46	0	200	V
			2.068188	61.68	PK-U	31.40	0.00	-50.50	42.58	-	-	68.2	-25.62	0	101	H
			2.073434	61.49	PK-U	31.40	0.00	-50.52	42.37	-	-	68.2	-25.83	0	200	V
			* 4.333567	45.77	ADR	33.70	0.00	-47.63	31.84	54	-22.16	-	-	0	200	V
			* 4.335254	45.88	ADR	33.70	0.00	-47.63	31.95	54	-22.05	-	-	0	101	H
			* 4.335694	57.40	PK-U	33.70	0.00	-47.63	43.47	-	-	74	-30.53	0	101	H
			* 4.355240	57.20	PK-U	33.70	0.00	-47.70	43.20	-	-	74	-30.8	0	200	V
			16.870489	48.71	PK-U	42.00	0.00	-39.97	50.74	-	-	68.2	-17.46	0	200	V
			16.878350	48.47	PK-U	42.0	0.00	-40.11	50.36	-	-	68.2	-17.84	0	200	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

40MHz

UNII-1 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fltr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT40 SU Mode	5190	6+5	* 4.585960	57.23	PK-U	34.10	0.00	-47.67	43.66	-	-	74	-30.34	0	101	H
			* 4.588747	45.54	ADR	34.10	0.00	-47.57	32.07	54	-21.93	-	-	0	200	V
			* 4.595027	45.69	ADR	34.10	0.00	-47.09	32.70	54	-21.3	-	-	0	101	H
			* 4.601234	57.99	PK-U	34.10	0.00	-46.91	45.18	-	-	74	-28.82	0	200	V
			* 12.685303	51.55	PK-U	39.10	0.00	-41.24	49.41	-	-	74	-24.59	0	200	H
			* 12.694290	39.79	ADR	39.10	0.00	-41.27	37.62	54	-16.38	-	-	0	200	V
			12.707228	51.57	PK-U	39.10	0.00	-41.73	48.94	-	-	68.2	-19.26	0	200	V
			17.639645	45.89	PK-U	42.00	0.00	-35.65	52.24	-	-	68.2	-15.96	0	200	V
			17.640679	46.29	PK-U	42.00	0.00	-35.64	52.65	-	-	68.2	-15.55	0	200	H
	3.372518		57.30	PK-U	32.90	0.00	-47.37	42.83	-	-	68.2	-25.37	360	200	H	
	3.392300		57.77	PK-U	32.80	0.00	-47.32	43.25	-	-	68.2	-24.95	360	200	V	
	* 12.668839		51.23	PK-U	39.10	0.00	-41.59	48.74	-	-	74	-25.26	360	200	H	
	* 12.671767		40.07	ADR	39.10	0.00	-41.48	37.69	54	-16.31	-	-	360	200	H	
	* 12.672483		39.65	ADR	39.10	0.00	-41.48	37.27	54	-16.73	-	-	360	198	V	
	12.700127		51.86	PK-U	39.10	0.00	-41.58	49.38	-	-	68.2	-18.82	360	198	V	
	17.629165		46.20	PK-U	42.00	0.00	-36.28	51.92	-	-	68.2	-16.28	360	101	H	
	17.660721		46.14	PK-U	42.00	0.00	-36.15	51.99	-	-	68.2	-16.21	360	198	V	

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

80MHz

UNII-1 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filtr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT80 SU Mode	5210	6+5	* 9.001711	54.85	PK-U	36.20	0.00	-44.46	46.59	-	-	74	-27.41	360	199	V
			* 9.007676	54.55	PK-U	36.20	0.00	-44.42	46.33	-	-	74	-27.67	360	101	H
			10.410021	54.29	PK-U	37.60	0.00	-44.37	47.52	-	-	68.2	-20.68	360	101	H
			10.441416	54.41	PK-U	37.60	0.00	-44.55	47.46	-	-	68.2	-20.74	360	199	V
			* 15.510643	50.17	PK-U	40.70	0.00	-41.14	49.73	-	-	74	-24.27	360	199	H
			* 15.511819	38.75	ADR	40.70	0.00	-41.15	38.30	54	-15.7	-	-	360	199	V
			* 15.514097	38.63	ADR	40.70	0.00	-41.17	38.16	54	-15.84	-	-	360	199	H
			* 15.550295	50.42	PK-U	40.80	0.00	-40.73	50.49	-	-	74	-23.51	360	199	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

160MHz

UNII-1 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filtr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT160 SU Mode	5250 (Straddle)	6+5	3.049926	57.96	PK-U	32.9	0.00	-47.71	43.15	-	-	68.2	-25.05	1	101	V
			3.063240	57.71	PK-U	32.9	0.00	-47.77	42.84	-	-	68.2	-25.36	1	200	H
			* 11.656137	51.79	PK-U	38.3	0.00	-42.51	47.58	-	-	74	-26.42	1	200	V
			* 11.659094	51.95	PK-U	38.3	0.00	-42.58	47.67	-	-	74	-26.33	1	101	H
			* 11.674485	40.42	ADR	38.4	0.00	-42.37	36.45	54	-17.55	-	-	1	101	H
			* 11.684648	40.14	ADR	38.4	0.00	-42.50	36.04	54	-17.96	-	-	1	200	V
			17.633576	46.37	PK-U	42.0	0.00	-35.88	52.49	-	-	68.2	-15.71	1	101	H
			17.678546	46.36	PK-U	42.0	0.00	-37.66	50.70	-	-	68.2	-17.5	1	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

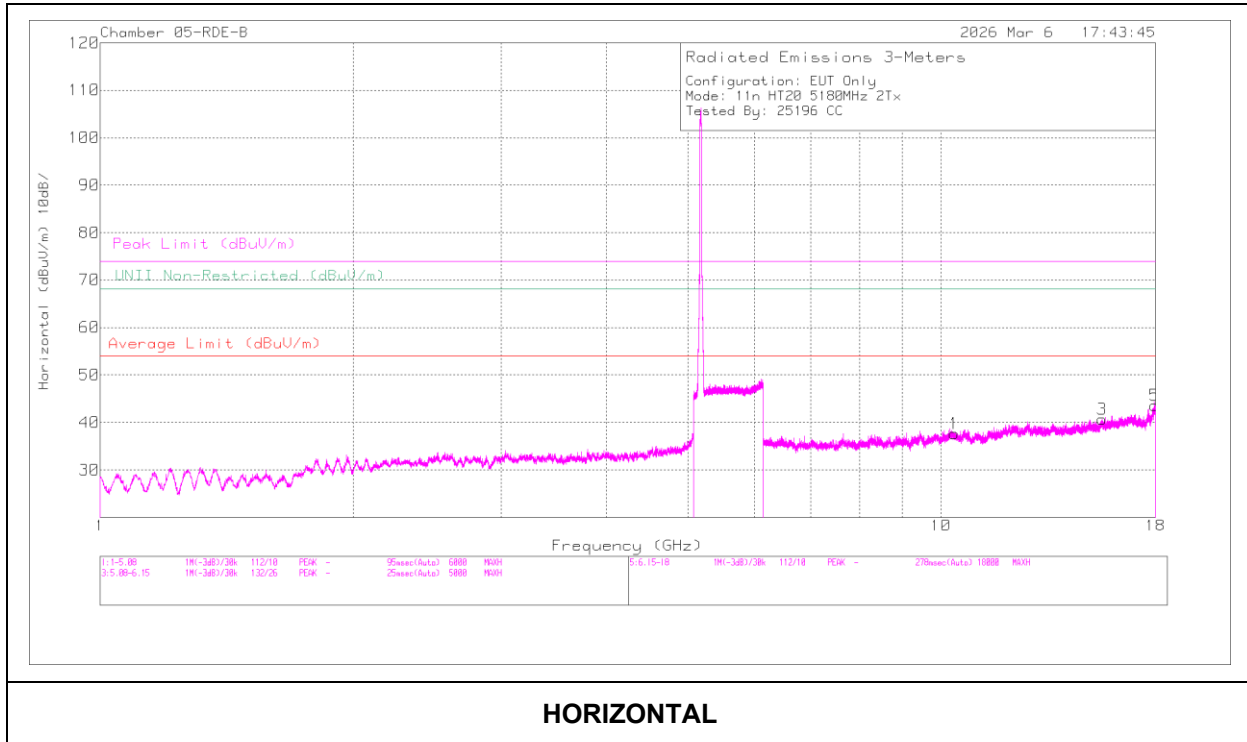
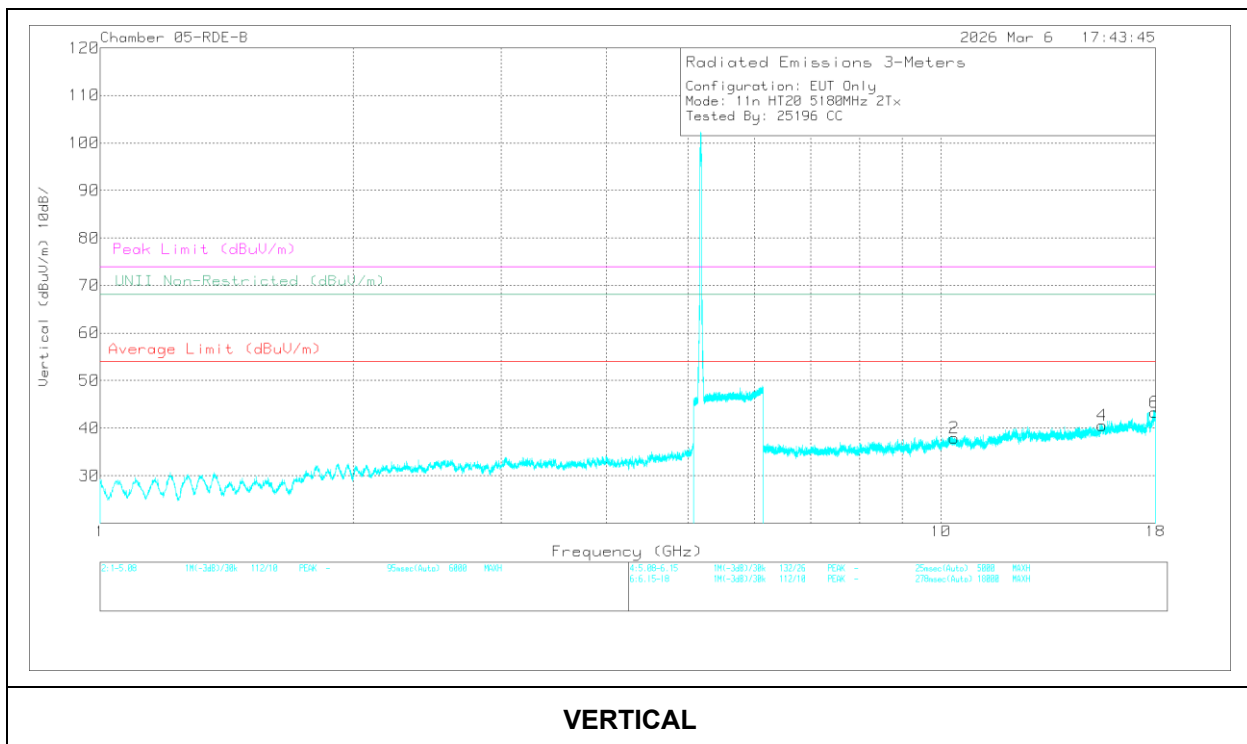
1.1.9. 802.11be MIMO PARTIAL RU MODE IN UNII-1 BAND – SPURIOUS EMISSIONS

UNII-1 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filt/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 26T - RU0	5180	6+5	* 12.385877	56.34	PK-U	38.80	0.00	-43.61	51.53	-	-	74	-22.47	360	100	H
			* 12.400047	44.22	ADR	38.80	0.00	-43.49	39.53	54	-14.47	-	-	360	100	H
			* 12.387169	56.06	PK-U	38.80	0.00	-43.64	51.22	-	-	74	-22.78	360	200	V
			* 12.403057	44.34	ADR	38.80	0.00	-43.50	39.64	54	-14.36	-	-	360	200	V
			6.434545	56.42	PK-U	35.60	0.00	-46.46	45.56	-	-	68.2	-22.64	360	100	H
			6.470102	56.27	PK-U	35.60	0.00	-46.39	45.48	-	-	68.2	-22.72	360	201	V
			8.736132	56.16	PK-U	36.20	0.00	-45.44	46.92	-	-	68.2	-21.28	360	200	V
			8.776631	56.23	PK-U	36.20	0.00	-45.64	46.79	-	-	68.2	-21.41	360	100	H
EHT20 26T - RU4	5200	6+5	* 11.020250	53.41	PK-U	37.60	0.00	-43.58	47.43	-	-	74	-26.57	360	101	H
			* 11.024685	41.84	ADR	37.60	0.00	-43.53	35.91	54	-18.09	-	-	360	101	H
			* 11.042782	54.35	PK-U	37.60	0.00	-43.51	48.44	-	-	74	-25.56	360	101	V
			* 11.035182	42.03	ADR	37.60	0.00	-43.63	36.00	54	-18	-	-	360	101	V
			3.043558	57.92	PK-U	32.90	0.00	-47.68	43.14	-	-	68.2	-25.06	360	200	V
			3.061786	57.76	PK-U	32.90	0.00	-47.76	42.90	-	-	68.2	-25.3	360	100	H
			16.830372	48.93	PK-U	42.10	0.00	-40.18	50.85	-	-	68.2	-17.35	360	101	V
			16.834359	49.50	PK-U	42.10	0.00	-40.12	51.48	-	-	68.2	-16.72	360	101	H
EHT20 26T - RU8	5240	6+5	* 3.797879	45.30	ADR	33.30	0.00	-46.88	31.72	54	-22.28	-	-	360	101	V
			* 3.800093	57.03	PK-U	33.30	0.00	-46.96	43.37	-	-	74	-30.63	360	101	V
			* 3.800934	57.20	PK-U	33.30	0.00	-47.00	43.50	-	-	74	-30.5	360	101	H
			* 3.809947	45.38	ADR	33.30	0.00	-47.33	31.35	54	-22.65	-	-	360	101	H
			16.730961	49.35	PK-U	42.10	0.00	-40.50	50.95	-	-	68.2	-17.25	360	101	V
			16.754228	49.14	PK-U	42.10	0.00	-40.52	50.72	-	-	68.2	-17.48	360	101	H
			9.850474	55.80	PK-U	37.00	0.00	-45.28	47.52	-	-	68.2	-20.68	360	101	H
			9.856633	55.38	PK-U	37.00	0.00	-45.41	46.97	-	-	68.2	-21.23	360	199	V
EHT80 484+242T - RU91	5210	6+5	* 3.975615	56.99	PK-U	33.30	0.00	-47.58	42.71	-	-	74	-31.29	360	101	H
			* 3.974855	45.96	ADR	33.30	0.00	-47.61	31.65	54	-22.35	-	-	360	101	H
			* 3.974629	58.38	PK-U	33.30	0.00	-47.62	44.06	-	-	74	-29.94	360	101	V
			* 3.972815	45.96	ADR	33.30	0.00	-47.64	31.62	54	-22.38	-	-	360	101	V
			* 11.106985	56.55	PK-U	37.60	0.00	-45.07	49.08	-	-	74	-24.92	360	101	H
			* 11.122625	44.37	ADR	37.60	0.00	-44.85	37.12	54	-16.88	-	-	360	101	H
			* 15.694277	53.92	PK-U	41.20	0.00	-42.26	52.86	-	-	74	-21.14	360	101	H
			* 15.698557	42.18	ADR	41.20	0.00	-42.21	41.17	54	-12.83	-	-	360	101	H
EHT160 996+484+242T - RU97	5250 (Straddle)	6+5	* 11.096213	56.59	PK-U	37.60	0.00	-45.10	49.09	-	-	74	-24.91	360	101	V
			* 11.099044	44.52	ADR	37.60	0.00	-45.08	37.04	54	-16.96	-	-	360	101	V
			* 15.699754	54.66	PK-U	41.20	0.00	-42.19	53.67	-	-	74	-20.33	360	101	V
			* 15.708630	42.28	ADR	41.20	0.00	-42.21	41.27	54	-12.73	-	-	360	101	V
			* 4.017984	57.83	PK-U	33.50	0.00	-47.41	43.92	-	-	74	-30.08	360	101	H
			* 4.018298	45.89	ADR	33.50	0.00	-47.42	31.97	54	-22.03	-	-	360	101	H
			* 4.020534	58.06	PK-U	33.50	0.00	-47.45	44.11	-	-	74	-29.89	360	101	V
			* 4.021494	45.69	ADR	33.50	0.00	-47.44	31.75	54	-22.25	-	-	360	101	V
			* 11.529631	55.58	PK-U	38.20	0.00	-43.91	49.87	-	-	74	-24.13	360	101	H
			* 11.542000	43.65	ADR	38.30	0.00	-44.00	37.95	54	-16.05	-	-	360	101	H
			* 15.695932	54.53	PK-U	41.20	0.00	-42.24	53.49	-	-	74	-20.51	360	101	H
			* 15.698518	42.07	ADR	41.20	0.00	-42.21	41.06	54	-12.94	-	-	360	101	H
			* 11.546722	55.58	PK-U	38.30	0.00	-44.03	49.85	-	-	74	-24.15	360	101	V
			* 11.529189	43.72	ADR	38.20	0.00	-43.92	38.00	54	-16	-	-	360	101	V
			* 15.686261	53.94	PK-U	41.20	0.00	-42.14	53.00	-	-	74	-21	360	101	V
			* 15.702705	42.28	ADR	41.20	0.00	-42.17	41.31	54	-12.69	-	-	360	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

WORST-CASE HARMONICS AND SPURIOUS EMISSIONS**802.11n HT20 / 5180 MHz / 2TX CDD****HORIZONTAL****VERTICAL**

Radiated Emissions

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filt/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	10.357514	54.90	PK-U	37.60	0.00	-44.91	47.59	-	-	68.2	-20.61	0	200	V
2	10.385285	54.84	PK-U	37.60	0.00	-44.51	47.93	-	-	68.2	-20.27	0	101	H
3	* 15.546208	38.73	ADR	40.70	0.00	-40.86	38.57	54	-15.43	-	-	0	200	V
3	* 15.550457	50.52	PK-U	40.80	0.00	-40.73	50.59	-	-	74	-23.41	0	200	V
4	* 15.551577	50.78	PK-U	40.80	0.00	-40.73	50.85	-	-	74	-23.15	0	200	H
4	* 15.559946	38.69	ADR	40.80	0.00	-40.66	38.83	54	-15.17	-	-	0	200	H
6	* 17.969132	47.14	PK-U	42.10	0.00	-35.74	53.50	-	-	74	-20.5	0	200	V
5	* 17.970459	35.08	ADR	42.10	0.00	-35.67	41.51	54	-12.49	-	-	0	101	H
6	* 17.979589	35.56	ADR	42.10	0.00	-35.51	42.15	54	-11.85	-	-	0	200	V
5	* 17.999499	46.85	PK-U	42.10	0.00	-35.79	53.16	-	-	74	-20.84	0	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.1.10. 802.11n/ac SISO MODE IN UNII-2A BAND – BANDEDGE**20MHz**

UNII-2A (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
HT20	5320	6	* 5.350000	66.25	Pk	34.50	0.00	-35.30	65.45	-	-	74	-8.55	147	107	H
			* 5.350029	68.53	Pk	34.50	0.00	-35.30	67.73	-	-	74	-6.27	147	107	H
			* 5.350000	51.32	RMS	34.50	0.00	-35.30	50.52	54	-3.48	-	-	147	107	H
			* 5.350752	51.67	RMS	34.50	0.00	-35.29	50.88	54	-3.12	-	-	205	107	H
			* 5.350000	62.94	Pk	34.50	0.00	-35.30	62.14	-	-	74	-11.86	205	109	V
			* 5.350075	64.71	Pk	34.50	0.00	-35.30	63.91	-	-	74	-10.09	205	109	V
		5	* 5.350000	48.74	RMS	34.50	0.00	-35.30	47.94	54	-6.06	-	-	205	109	V
			* 5.350285	49.21	RMS	34.50	0.00	-35.30	48.41	54	-5.59	-	-	205	109	V
			* 5.350000	55.86	Pk	34.50	0.00	-23.10	67.26	-	-	74	-6.74	185	134	H
			* 5.350099	57.19	Pk	34.50	0.00	-23.10	68.59	-	-	74	-5.41	185	134	H
			* 5.350000	38.58	RMS	34.50	0.00	-23.10	49.98	54	-4.02	-	-	185	134	H
			* 5.351032	39.36	RMS	34.50	0.00	-23.00	50.86	54	-3.14	-	-	185	134	H
			* 5.350000	50.67	Pk	34.50	0.00	-23.10	62.07	-	-	74	-11.93	235	187	V
			* 5.350285	50.94	Pk	34.50	0.00	-23.10	62.34	-	-	74	-11.66	235	187	V
			* 5.350000	34.02	RMS	34.50	0.00	-23.10	45.42	54	-8.58	-	-	235	187	V
			* 5.350005	34.27	RMS	34.50	0.00	-23.10	45.67	54	-8.33	-	-	235	187	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

40MHz

UNII-2A (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
HT40	5310	6	* 5.350000	66.56	Pk	34.40	0.00	-35.78	65.18	-	-	74	-8.82	89	113	H
			* 5.352175	70.41	Pk	34.40	0.00	-35.77	69.04	-	-	74	-4.96	89	113	H
			* 5.350000	50.38	RMS	34.40	0.00	-35.78	49.00	54	-5.00	-	-	89	113	H
			* 5.350239	51.01	RMS	34.40	0.00	-35.78	49.63	54	-4.37	-	-	89	113	H
			* 5.350000	60.62	Pk	34.40	0.00	-35.78	59.24	-	-	74	-14.76	127	108	V
			* 5.350309	65.40	Pk	34.40	0.00	-35.78	64.02	-	-	74	-9.98	127	108	V
		5	* 5.350000	47.31	RMS	34.40	0.00	-35.78	45.93	54	-8.07	-	-	127	108	V
			* 5.350332	48.14	RMS	34.40	0.00	-35.78	46.76	54	-7.24	-	-	127	108	V
			* 5.350000	61.02	Pk	35.00	0.00	-30.70	65.32	-	-	74	-8.68	329	219	H
			* 5.352098	64.57	Pk	35.00	0.00	-30.70	68.87	-	-	74	-5.13	329	219	H
			* 5.350000	43.58	RMS	35.00	0.00	-30.70	47.88	54	-6.12	-	-	329	219	H
			* 5.350680	44.23	RMS	35.00	0.00	-30.70	48.53	54	-5.47	-	-	329	219	H
			* 5.350000	58.24	Pk	35.00	0.00	-30.70	62.54	-	-	74	-11.46	50	211	V
			* 5.351730	61.43	Pk	35.00	0.00	-30.70	65.73	-	-	74	-8.27	50	211	V
			* 5.350000	41.90	RMS	35.00	0.00	-30.70	46.20	54	-7.80	-	-	50	211	V
			* 5.351835	42.80	RMS	35.00	0.00	-30.70	47.10	54	-6.90	-	-	50	211	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

80MHz

UNII-2A (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
VHT80	5290	6	* 5.350000	66.00	Pk	34.50	0.00	-34.20	66.30	-	-	74	-7.70	12	103	H
			* 5.352597	68.75	Pk	34.60	0.00	-34.10	69.25	-	-	74	-4.75	12	103	H
			* 5.350000	48.25	RMS	34.50	0.00	-34.20	48.55	54	-5.45	-	-	12	103	H
			* 5.351573	49.33	RMS	34.60	0.00	-34.20	49.73	54	-4.27	-	-	12	103	H
			* 5.350000	61.12	Pk	34.50	0.00	-34.20	61.42	-	-	74	-12.58	49	125	V
			* 5.351967	63.52	Pk	34.60	0.00	-34.20	63.92	-	-	74	-10.08	49	125	V
			* 5.350000	44.56	RMS	34.50	0.00	-34.20	44.86	54	-9.14	-	-	49	125	V
			* 5.350995	45.48	RMS	34.60	0.00	-34.20	45.88	54	-8.12	-	-	49	125	V
		5	* 5.350000	60.35	Pk	35.00	0.00	-30.70	64.65	-	-	74	-9.35	315	165	H
			* 5.351100	64.80	Pk	35.00	0.00	-30.70	69.10	-	-	74	-4.90	315	165	H
			* 5.350000	43.06	RMS	35.00	0.00	-30.70	47.36	54	-6.64	-	-	315	165	H
			* 5.350234	45.12	RMS	35.00	0.00	-30.70	49.42	54	-4.58	-	-	315	165	H
			* 5.350000	55.05	Pk	35.00	0.00	-30.70	59.35	-	-	74	-14.65	40	205	V
			* 5.359370	58.93	Pk	35.00	0.00	-30.70	63.23	-	-	74	-10.77	40	205	V
			* 5.350000	41.22	RMS	35.00	0.00	-30.70	45.52	54	-8.48	-	-	40	205	V
			* 5.354198	41.90	RMS	35.00	0.00	-30.70	46.20	54	-7.8	-	-	40	205	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

160MHz

UNII-2A (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
VHT160	5250 (Straddle)	6	* 5.350000	51.52	Pk	35.00	0.00	-30.70	55.82	-	-	74	-18.18	324	363	H
			* 5.400325	65.08	Pk	35.00	0.00	-30.70	69.38	-	-	74	-4.62	324	363	H
			* 5.350000	40.71	RMS	35.00	0.10	-30.70	45.11	54	-8.89	-	-	324	363	H
			* 5.398329	44.41	RMS	35.00	0.10	-30.70	48.81	54	-5.19	-	-	324	363	H
			* 5.350000	50.43	Pk	35.00	0.00	-30.70	54.73	-	-	74	-19.27	324	118	V
			* 5.400666	57.94	Pk	35.00	0.00	-30.70	62.24	-	-	74	-11.76	324	118	V
			* 5.350000	39.18	RMS	35.00	0.10	-30.70	43.58	54	-10.42	-	-	324	118	V
			* 5.404499	40.63	RMS	35.00	0.10	-30.70	45.03	54	-8.97	-	-	324	118	V
		5	* 5.350000	52.13	Pk	35.00	0.00	-30.70	56.43	-	-	74	-17.57	330	181	H
			* 5.402215	64.88	Pk	35.00	0.00	-30.70	69.18	-	-	74	-4.82	330	181	H
			* 5.350000	41.06	RMS	35.00	0.10	-30.70	45.46	54	-8.54	-	-	330	181	H
			* 5.403265	44.34	RMS	35.00	0.10	-30.70	48.74	54	-5.26	-	-	330	181	H
			* 5.350000	51.12	Pk	35.00	0.00	-30.70	55.42	-	-	74	-18.58	48	193	V
			* 5.402582	61.31	Pk	35.00	0.00	-30.70	65.61	-	-	74	-8.39	48	193	V
			* 5.350000	39.95	RMS	35.00	0.10	-30.70	44.35	54	-9.65	-	-	48	193	V
			* 5.386673	41.81	RMS	35.00	0.10	-30.70	46.21	54	-7.79	-	-	48	193	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.11. 802.11n/ac MIMO MODE IN UNII-2A BAND - BANDEDGE

UNII-2A (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
HT20	5320	6+5	* 5.350000	62.61	Pk	34.50	0.00	-32.57	64.54	-	-	74	-9.46	83	137	H
			* 5.350869	67.25	Pk	34.60	0.00	-32.58	69.27	-	-	74	-4.73	83	137	H
			* 5.350000	46.41	RMS	34.50	0.00	-32.57	48.34	54	-5.66	-	-	83	137	H
			* 5.350682	47.28	RMS	34.60	0.00	-32.58	49.30	54	-4.70	-	-	83	137	H
			* 5.350000	55.63	Pk	34.50	0.00	-32.57	57.56	-	-	74	-16.44	137	317	V
			* 5.363118	57.65	Pk	34.60	0.00	-32.62	59.63	-	-	74	-14.37	137	317	V
			* 5.350000	44.41	RMS	34.50	0.00	-32.57	46.34	54	-7.66	-	-	137	317	V
			* 5.374015	45.60	RMS	34.60	0.00	-32.62	47.58	54	-6.42	-	-	137	317	V
			* 5.350000	64.34	Pk	34.50	0.00	-32.57	66.27	-	-	74	-7.73	74	115	H
			* 5.350589	66.95	Pk	34.60	0.00	-32.58	68.97	-	-	74	-5.03	74	115	H
HT40	5310	6+5	* 5.350000	47.55	RMS	34.50	0.00	-32.57	49.48	54	-4.52	-	-	74	115	H
			* 5.350169	48.69	RMS	34.50	0.00	-32.57	50.62	54	-3.38	-	-	74	115	H
			* 5.350000	55.11	Pk	34.50	0.00	-32.57	57.04	-	-	74	-16.96	74	115	V
			* 5.394945	57.98	Pk	34.50	0.00	-32.57	59.91	-	-	74	-14.09	74	115	V
			* 5.350000	44.85	RMS	34.50	0.00	-32.57	46.78	54	-7.22	-	-	74	115	V
			* 5.405514	45.63	RMS	34.50	0.00	-32.59	47.54	54	-6.46	-	-	74	115	V
			* 5.350000	62.03	Pk	34.50	0.00	-34.20	62.33	-	-	74	-11.67	179	192	H
			* 5.351100	68.74	Pk	34.60	0.00	-34.20	69.14	-	-	74	-4.86	179	192	H
			* 5.350000	46.97	RMS	34.50	0.00	-34.20	47.27	54	-6.73	-	-	179	192	H
			* 5.351048	47.76	RMS	34.60	0.00	-34.20	48.16	54	-5.84	-	-	179	192	H
VHT80	5290	6+5	* 5.350000	56.18	Pk	34.50	0.00	-34.20	56.48	-	-	74	-17.52	258	151	V
			* 5.370160	60.62	Pk	34.50	0.00	-34.10	61.02	-	-	74	-12.98	258	151	V
			* 5.350000	43.14	RMS	34.50	0.00	-34.20	43.44	54	-10.56	-	-	258	151	V
			* 5.359475	43.86	RMS	34.60	0.00	-34.20	44.26	54	-9.74	-	-	258	151	V
			* 5.350000	52.16	Pk	35.00	0.00	-30.70	56.46	-	-	74	-17.54	322	215	H
			* 5.400876	64.66	Pk	35.00	0.00	-30.70	68.96	-	-	74	-5.04	322	215	H
			* 5.350000	40.82	RMS	35.00	0.10	-30.70	45.22	54	-8.78	-	-	322	215	H
			* 5.400640	43.17	RMS	35.00	0.10	-30.70	47.57	54	-6.43	-	-	322	215	H
			* 5.350000	50.35	Pk	35.00	0.00	-30.70	54.65	-	-	74	-19.35	19	147	V
			* 5.401007	58.88	Pk	35.00	0.00	-30.70	63.18	-	-	74	-10.82	19	147	V
VHT160	5250 (Straddle)	6+5	* 5.350000	39.62	RMS	35.00	0.10	-30.70	44.02	54	-9.98	-	-	19	147	V
			* 5.401191	41.34	RMS	35.00	0.10	-30.70	45.74	54	-8.26	-	-	19	147	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.12. 802.11be SISO SU MODE IN UNII-2A BAND – BANDEDGE**20MHz**

UNII-2A (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 SU Mode	5320	6	* 5.350000	67.77	Pk	34.50	0.00	-35.37	66.90	-	-	74	-7.10	97	154	H
			* 5.350915	70.58	Pk	34.50	0.00	-35.37	69.71	-	-	74	-4.29	97	154	H
			* 5.350000	52.10	RMS	34.50	0.00	-35.37	51.23	54	-2.77	-	-	97	154	H
			* 5.350332	52.27	RMS	34.50	0.00	-35.37	51.40	54	-2.60	-	-	97	154	H
			* 5.350000	64.10	Pk	34.50	0.00	-35.37	63.23	-	-	74	-10.77	162	106	V
			* 5.350029	67.86	Pk	34.50	0.00	-35.37	66.99	-	-	74	-7.01	162	106	V
		5	* 5.350000	49.40	RMS	34.50	0.00	-35.37	48.53	54	-5.47	-	-	162	106	V
			* 5.350379	50.22	RMS	34.50	0.00	-35.37	49.35	54	-4.65	-	-	162	106	V
			* 5.350000	66.09	Pk	34.70	0.00	-34.90	65.89	-	-	74	-8.11	264	216	H
			* 5.350449	68.80	Pk	34.70	0.00	-35.00	68.50	-	-	74	-5.50	264	216	H
			* 5.350000	48.70	RMS	34.70	0.00	-34.90	48.50	54	-5.50	-	-	264	216	H
			* 5.350075	49.96	RMS	34.70	0.00	-34.90	49.76	54	-4.24	-	-	264	216	H
			* 5.350000	60.36	Pk	34.70	0.00	-34.90	60.16	-	-	74	-13.84	343	149	V
			* 5.350309	64.24	Pk	34.70	0.00	-35.00	63.94	-	-	74	-10.06	343	149	V
			* 5.350000	46.63	RMS	34.70	0.00	-34.90	46.43	54	-7.57	-	-	343	149	V
			* 5.350192	47.22	RMS	34.70	0.00	-34.90	47.02	54	-6.98	-	-	343	149	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

40MHz

UNII-2A (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT40 SU Mode	5310	6	* 5.350000	70.18	Pk	34.90	0.00	-38.60	66.48	-	-	74	-7.52	276	241	H
			* 5.353622	72.26	Pk	34.90	0.00	-38.54	68.62	-	-	74	-5.38	276	241	H
			* 5.350000	51.35	RMS	34.90	0.00	-38.60	47.65	54	-6.35	-	-	276	241	H
			* 5.350262	52.74	RMS	34.90	0.00	-38.60	49.04	54	-4.96	-	-	276	241	H
			* 5.350000	62.93	Pk	34.90	0.00	-38.60	59.23	-	-	74	-14.77	314	124	V
			* 5.350122	66.11	Pk	34.90	0.00	-38.60	62.41	-	-	74	-11.59	314	124	V
		5	* 5.350000	48.73	RMS	34.90	0.00	-38.60	45.03	54	-8.97	-	-	314	124	V
			* 5.350915	49.24	RMS	34.90	0.00	-38.60	45.54	54	-8.46	-	-	314	124	V
			* 5.350000	61.64	Pk	35.00	0.00	-30.70	65.94	-	-	74	-8.06	7	220	H
			* 5.352177	64.40	Pk	35.00	0.00	-30.70	68.70	-	-	74	-5.30	7	220	H
			* 5.350000	44.16	RMS	35.00	0.00	-30.70	48.46	54	-5.54	-	-	7	220	H
			* 5.351232	44.80	RMS	35.00	0.00	-30.70	49.10	54	-4.90	-	-	7	220	H
			* 5.350000	59.45	Pk	35.00	0.00	-30.70	63.75	-	-	74	-10.25	303	363	V
			* 5.351888	60.99	Pk	35.00	0.00	-30.70	65.29	-	-	74	-8.71	303	363	V
			* 5.350000	41.17	RMS	35.00	0.00	-30.70	45.47	54	-8.53	-	-	303	363	V
			* 5.351153	42.48	RMS	35.00	0.00	-30.70	46.78	54	-7.22	-	-	303	363	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

80MHz

UNII-2A (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT80 SU Mode	5290	6	* 5.350000	66.13	Pk	34.50	0.00	-34.84	65.79	-	-	74	-8.21	136	114	H
			* 5.354252	69.85	Pk	34.50	0.00	-34.90	69.45	-	-	74	-4.55	136	114	H
			* 5.350000	48.26	RMS	34.50	0.00	-34.84	47.92	54	-6.08	-	-	136	114	H
			* 5.350915	49.19	RMS	34.50	0.00	-34.84	48.85	54	-5.15	-	-	136	114	H
			* 5.350000	57.14	Pk	34.50	0.00	-34.84	56.80	-	-	74	-17.20	207	138	V
			* 5.356258	61.35	Pk	34.50	0.00	-34.90	60.95	-	-	74	-13.05	207	138	V
		5	* 5.350000	46.07	RMS	34.50	0.00	-34.84	45.73	54	-8.27	-	-	207	138	V
			* 5.351055	46.54	RMS	34.50	0.00	-34.84	46.20	54	-7.80	-	-	207	138	V
			* 5.350000	64.25	Pk	34.50	0.00	-35.37	63.38	-	-	74	-10.62	283	112	H
			* 5.351615	70.18	Pk	34.50	0.00	-35.37	69.31	-	-	74	-4.69	283	112	H
			* 5.350000	47.26	RMS	34.50	0.00	-35.37	46.39	54	-7.61	-	-	283	112	H
			* 5.351755	48.14	RMS	34.50	0.00	-35.37	47.27	54	-6.73	-	-	283	112	H
			* 5.350000	55.73	Pk	34.50	0.00	-35.37	54.86	-	-	74	-19.14	8	173	V
			* 5.354252	61.93	Pk	34.50	0.00	-35.36	61.07	-	-	74	-12.93	8	173	V
			* 5.350000	45.18	RMS	34.50	0.00	-35.37	44.31	54	-9.69	-	-	8	173	V
			* 5.354509	46.15	RMS	34.50	0.00	-35.36	45.29	54	-8.71	-	-	8	173	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

160MHz

UNII-2A (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT160 SU Mode	5250 (Straddle)	6	* 5.350000	61.31	Pk	34.60	0.00	-32.36	63.55	-	-	74	-10.45	159	112	H
			* 5.396088	65.11	Pk	34.50	0.00	-32.39	67.22	-	-	74	-6.78	159	112	H
			* 5.350000	45.67	RMS	34.60	0.14	-32.36	48.05	54	-5.95	-	-	159	112	H
			* 5.396298	48.50	RMS	34.50	0.14	-32.39	50.75	54	-3.25	-	-	159	112	H
			* 5.350000	56.65	Pk	34.60	0.00	-32.36	58.89	-	-	74	-15.11	168	105	V
			* 5.390605	60.81	Pk	34.50	0.00	-32.37	62.94	-	-	74	-11.06	168	105	V
		5	* 5.350000	44.90	RMS	34.60	0.14	-32.36	47.28	54	-6.72	-	-	168	105	V
			* 5.396205	46.64	RMS	34.50	0.14	-32.39	48.89	54	-5.11	-	-	168	105	V
			* 5.350000	66.00	Pk	34.70	0.00	-34.90	65.80	-	-	74	-8.20	12	103	H
			* 5.351195	68.94	Pk	34.70	0.00	-35.10	68.54	-	-	74	-5.46	12	103	H
			* 5.350000	49.01	RMS	34.70	0.14	-34.90	48.95	54	-5.05	-	-	12	103	H
			* 5.350355	50.54	RMS	34.70	0.14	-35.00	50.38	54	-3.62	-	-	12	103	H
			* 5.350000	59.80	Pk	34.70	0.00	-34.90	59.60	-	-	74	-14.40	317	169	V
			* 5.351079	62.75	Pk	34.70	0.00	-35.10	62.35	-	-	74	-11.65	317	169	V
			* 5.350000	45.36	RMS	34.70	0.14	-34.90	45.30	54	-8.70	-	-	317	169	V
			* 5.374458	46.35	RMS	34.80	0.14	-35.00	46.29	54	-7.71	-	-	317	169	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.13. 802.11be SISO PARTIAL RU MODE IN UNII-2A BAND – BANDEDGE

UNII-2A (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 52+26T - RU72	5320	6	* 5.350000	62.74	Pk	34.90	0.00	-38.60	59.04	-	-	74	-14.96	102	107	H
			* 5.350052	65.15	Pk	34.90	0.00	-38.60	61.45	-	-	74	-12.55	102	107	H
			* 5.350000	47.42	RMS	34.90	0.00	-38.60	43.72	54	-10.28	-	-	102	107	H
			* 5.358405	48.23	RMS	35.00	0.00	-38.60	44.63	54	-9.37	-	-	102	107	H
			* 5.350000	61.52	Pk	34.90	0.00	-38.60	57.82	-	-	74	-16.18	152	115	V
			* 5.350122	62.68	Pk	34.90	0.00	-38.60	58.98	-	-	74	-15.02	152	115	V
		5	* 5.350000	47.13	RMS	34.90	0.00	-38.60	43.43	54	-10.57	-	-	152	115	V
			* 5.403181	48.00	RMS	35.00	0.00	-38.40	44.60	54	-9.40	-	-	152	115	V
			* 5.350000	61.92	Pk	34.50	0.00	-37.02	59.40	-	-	74	-14.60	278	234	H
			* 5.350029	61.99	Pk	34.50	0.00	-37.02	59.47	-	-	74	-14.53	278	234	H
			* 5.350000	47.30	RMS	34.50	0.00	-37.02	44.78	54	-9.22	-	-	278	234	H
			* 5.399681	47.80	RMS	34.60	0.00	-36.91	45.49	54	-8.51	-	-	278	234	H
			* 5.350000	57.95	Pk	34.50	0.00	-37.02	55.43	-	-	74	-18.57	358	131	V
			* 5.420308	59.01	Pk	34.60	0.00	-36.90	56.71	-	-	74	-17.29	358	131	V
			* 5.350000	45.77	RMS	34.50	0.00	-37.02	43.25	54	-10.75	-	-	358	131	V
			* 5.350915	46.96	RMS	34.50	0.00	-36.99	44.47	54	-9.53	-	-	358	131	V
EHT80 48+242T - RU90	5290	6	* 5.350000	67.88	Pk	34.70	0.00	-37.18	65.40	-	-	74	-8.60	284	120	H
			* 5.357752	71.02	Pk	34.80	0.00	-37.23	68.59	-	-	74	-5.41	284	120	H
			* 5.350000	48.83	RMS	34.70	0.00	-37.18	46.35	54	-7.65	-	-	284	120	H
			* 5.353319	49.96	RMS	34.70	0.00	-37.17	47.49	54	-6.51	-	-	284	120	H
			* 5.350000	62.15	Pk	34.70	0.00	-37.18	59.67	-	-	74	-14.33	320	105	V
			* 5.357098	65.72	Pk	34.80	0.00	-37.20	63.32	-	-	74	-10.68	320	105	V
		5	* 5.350000	47.40	RMS	34.70	0.00	-37.18	44.92	54	-9.08	-	-	320	105	V
			* 5.358428	48.47	RMS	34.80	0.00	-37.24	46.03	54	-7.97	-	-	320	105	V
			* 5.350000	67.57	Pk	34.70	0.00	-37.18	65.09	-	-	74	-8.91	101	235	H
			* 5.357635	71.50	Pk	34.80	0.00	-37.23	69.07	-	-	74	-4.93	101	235	H
			* 5.350000	48.27	RMS	34.70	0.00	-37.18	45.79	54	-8.21	-	-	101	235	H
			* 5.358078	51.34	RMS	34.80	0.00	-37.24	48.90	54	-5.10	-	-	101	235	H
			* 5.350000	61.16	Pk	34.70	0.00	-37.18	58.68	-	-	74	-15.32	181	240	V
			* 5.358172	65.91	Pk	34.80	0.00	-37.24	63.47	-	-	74	-10.53	181	240	V
			* 5.350000	47.05	RMS	34.70	0.00	-37.18	44.57	54	-9.43	-	-	181	240	V
			* 5.356608	48.12	RMS	34.80	0.00	-37.21	45.71	54	-8.29	-	-	181	240	V
EHT160 99+484+ 242T - RU96	5250 (Straddle)	6	* 5.350000	58.51	Pk	34.50	0.00	-37.02	55.99	-	-	74	-18.01	116	383	H
			* 5.397021	71.14	Pk	34.60	0.00	-36.92	68.82	-	-	74	-5.18	116	383	H
			* 5.350000	47.02	RMS	34.50	0.00	-37.02	44.50	54	-9.50	-	-	116	383	H
			* 5.396998	50.10	RMS	34.60	0.00	-36.92	47.78	54	-6.22	-	-	116	383	H
			* 5.350000	56.57	Pk	34.50	0.00	-37.02	54.05	-	-	74	-19.95	88	297	V
			* 5.396228	60.49	Pk	34.60	0.00	-36.90	58.19	-	-	74	-15.81	88	297	V
		5	* 5.350000	45.35	RMS	34.50	0.00	-37.02	42.83	54	-11.17	-	-	88	297	V
			* 5.351989	46.67	RMS	34.50	0.00	-37.00	44.17	54	-9.83	-	-	88	297	V
			* 5.350000	63.77	Pk	34.70	0.00	-37.18	61.29	-	-	74	-12.71	279	222	H
			* 5.397068	71.61	Pk	34.80	0.00	-37.06	69.35	-	-	74	-4.65	279	222	H
			* 5.350000	48.92	RMS	34.70	0.00	-37.18	46.44	54	-7.56	-	-	279	222	H
			* 5.395411	51.20	RMS	34.80	0.00	-37.05	48.95	54	-6.05	-	-	279	222	H
			* 5.350000	58.79	Pk	34.70	0.00	-37.18	56.31	-	-	74	-17.69	2	208	V
			* 5.396835	64.85	Pk	34.80	0.00	-37.06	62.59	-	-	74	-11.41	2	208	V
			* 5.350000	46.63	RMS	34.70	0.00	-37.18	44.15	54	-9.85	-	-	2	208	V
			* 5.354369	47.68	RMS	34.80	0.00	-37.16	45.32	54	-8.68	-	-	2	208	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.14. 802.11be MIMO SU MODE IN UNII-2A BAND – BANDEDGE

UNII-2A (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filtr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 SU Mode	5320	6+5	* 5.350000	66.77	Pk	34.50	0.00	-35.30	65.97	-	-	74	-8.03	16	276	H
			* 5.350472	68.15	Pk	34.50	0.00	-35.30	67.35	-	-	74	-6.65	16	276	H
			* 5.350000	51.41	RMS	34.50	0.00	-35.30	50.61	54	-3.39	-	-	16	276	H
			* 5.350099	52.25	RMS	34.50	0.00	-35.30	51.45	54	-2.55	-	-	16	276	H
			* 5.350000	64.96	Pk	34.50	0.00	-35.30	64.16	-	-	74	-9.84	21	126	V
			* 5.350192	65.90	Pk	34.50	0.00	-35.30	65.10	-	-	74	-8.90	21	126	V
			* 5.350000	49.36	RMS	34.50	0.00	-35.30	48.56	54	-5.44	-	-	21	126	V
			* 5.350285	50.13	RMS	34.50	0.00	-35.30	49.33	54	-4.67	-	-	21	126	V
			* 5.350000	63.91	Pk	34.60	0.00	-32.36	66.15	-	-	74	-7.85	158	306	H
			* 5.350052	66.45	Pk	34.60	0.00	-32.36	68.69	-	-	74	-5.31	158	306	H
EHT40 SU Mode	5310	6+5	* 5.350000	47.39	RMS	34.60	0.00	-32.36	49.63	54	-4.37	-	-	158	306	H
			* 5.350052	48.34	RMS	34.60	0.00	-32.36	50.58	54	-3.42	-	-	158	306	H
			* 5.350000	58.25	Pk	34.60	0.00	-32.36	60.49	-	-	74	-13.51	130	273	V
			* 5.350052	60.90	Pk	34.60	0.00	-32.36	63.14	-	-	774	-10.86	130	273	V
			* 5.350000	45.29	RMS	34.60	0.00	-32.36	47.53	54	-6.47	-	-	130	273	V
			* 5.351265	45.60	RMS	34.60	0.00	-32.33	47.87	54	-6.13	-	-	130	273	V
			* 5.350000	57.23	Pk	35.00	0.00	-30.70	61.53	-	-	74	-12.47	324	173	H
			* 5.351704	65.09	Pk	35.00	0.00	-30.70	69.39	-	-	74	-4.61	324	173	H
			* 5.350000	41.31	RMS	35.00	0.00	-30.70	45.61	54	-8.39	-	-	324	173	H
			* 5.350785	43.43	RMS	35.00	0.00	-30.70	47.73	54	-6.27	-	-	324	173	H
EHT80 SU Mode	5290	6+5	* 5.350000	51.32	Pk	35.00	0.00	-30.70	55.62	-	-	74	-18.38	51	104	V
			* 5.359790	57.55	Pk	35.00	0.00	-30.70	61.85	-	-	74	-12.15	51	104	V
			* 5.350000	40.34	RMS	35.00	0.00	-30.70	44.64	54	-9.36	-	-	51	104	V
			* 5.350549	41.17	RMS	35.00	0.00	-30.70	45.47	54	-8.53	-	-	51	104	V
			* 5.350000	66.83	Pk	34.70	0.00	-37.18	64.35	-	-	74	-9.65	276	194	H
			* 5.350682	71.21	Pk	34.70	0.00	-37.19	68.72	-	-	74	-5.28	276	194	H
			* 5.350000	52.49	RMS	34.70	0.14	-37.18	50.15	54	-3.85	-	-	276	194	H
EHT160 SU Mode	5250 (Straddle)	6+5	* 5.350332	53.50	RMS	34.70	0.14	-37.18	51.16	54	-2.84	-	-	276	194	H
			* 5.350000	59.78	Pk	34.70	0.00	-37.18	57.30	-	-	74	-16.70	350	134	V
			* 5.359782	62.27	Pk	34.80	0.00	-37.25	59.82	-	-	74	-14.18	350	134	V
			* 5.350000	46.73	RMS	34.70	0.14	-37.18	44.39	54	-9.61	-	-	350	134	V
			* 5.354625	47.94	RMS	34.80	0.14	-37.17	45.71	54	-8.29	-	-	350	134	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

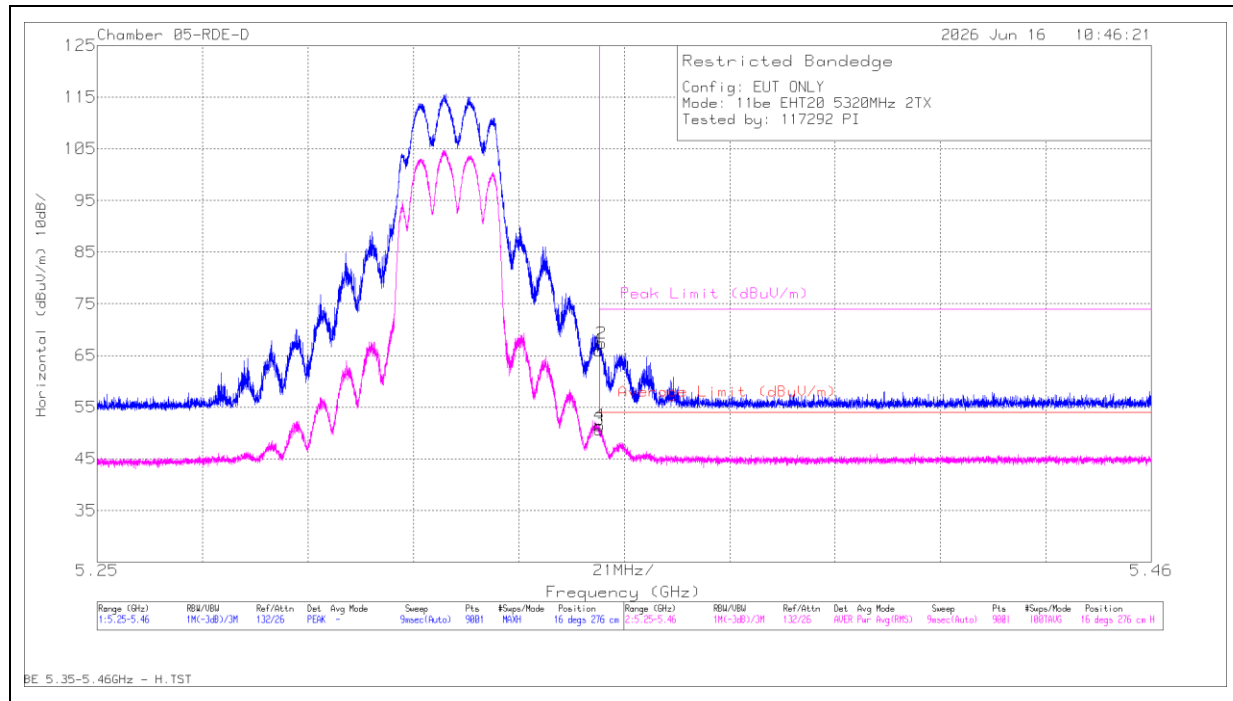
1.1.15. 802.11be MIMO PARTIAL RU MODE IN UNII-2A BAND – BANDEDGE

UNII-2A (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filtr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 52+26T - RU72	5320	6+5	* 5.350000	63.25	Pk	34.60	0.00	-39.60	58.25	-	-	74	-15.75	46	205	H
			* 5.350122	63.51	Pk	34.60	0.00	-39.61	58.50	-	-	74	-15.50	46	205	H
			* 5.350000	48.49	RMS	34.60	0.00	-39.60	43.49	54	-10.51	-	-	46	205	H
			* 5.385308	49.05	RMS	34.60	0.00	-39.60	44.05	54	-9.95	-	-	46	205	H
			* 5.350000	63.13	Pk	34.60	0.00	-39.60	58.13	-	-	74	-15.87	54	204	V
			* 5.350029	63.65	Pk	34.60	0.00	-39.60	58.65	-	-	74	-15.35	54	204	V
			* 5.350000	48.17	RMS	34.60	0.00	-39.60	43.17	54	-10.83	-	-	54	204	V
			* 5.360925	48.90	RMS	34.60	0.00	-39.52	43.98	54	-10.02	-	-	54	204	V
EHT80 484+242T - RU90	5290	6+5	* 5.350000	65.77	Pk	34.70	0.00	-37.18	63.29	-	-	74	-10.71	128	198	H
			* 5.356468	71.06	Pk	34.80	0.00	-37.21	68.65	-	-	74	-5.35	128	198	H
			* 5.350000	50.69	RMS	34.70	0.00	-37.18	48.21	54	-5.79	-	-	128	198	H
			* 5.350845	52.01	RMS	34.70	0.00	-37.19	49.52	54	-4.48	-	-	128	198	H
			* 5.350000	59.30	Pk	34.70	0.00	-37.18	56.82	-	-	74	-17.18	174	167	V
			* 5.358965	64.69	Pk	34.80	0.00	-37.24	62.25	-	-	74	-11.75	174	167	V
			* 5.350000	46.73	RMS	34.70	0.00	-37.18	44.25	54	-9.75	-	-	174	167	V
			* 5.354369	47.92	RMS	34.80	0.00	-37.16	45.56	54	-8.44	-	-	174	167	V
EHT160 996+484+ 242T - RU96	5250 (Straddle)	6+5	* 5.350000	62.86	Pk	34.80	0.00	-38.18	59.48	-	-	74	-14.52	272	224	H
			* 5.395505	72.29	Pk	34.80	0.00	-38.14	68.95	-	-	74	-5.05	272	224	H
			* 5.350000	50.46	RMS	34.80	0.00	-38.18	47.08	54	-6.92	-	-	272	224	H
			* 5.356165	52.13	RMS	34.90	0.00	-38.19	48.84	54	-5.16	-	-	272	224	H
			* 5.350000	58.99	Pk	34.80	0.00	-38.18	55.61	-	-	74	-18.39	353	138	V
			* 5.394921	62.96	Pk	34.80	0.00	-38.15	59.61	-	-	74	-14.39	353	138	V
			* 5.350000	47.16	RMS	34.80	0.00	-38.18	43.78	54	-10.22	-	-	353	138	V
			* 5.354299	47.91	RMS	34.80	0.00	-38.18	44.53	54	-9.47	-	-	353	138	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

WORST-CASE BANDEDGE**802.11be EHT20 / 5320 MHz / 2TX CDD/SU****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filt/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.350000	66.77	Pk	34.50	0.00	-35.30	65.97	-	-	74	-8.03	16	276	H
2	* 5.350472	68.15	Pk	34.50	0.00	-35.30	67.35	-	-	74	-6.65	16	276	H
3	* 5.350000	51.41	RMS	34.50	0.00	-35.30	50.61	54	-3.39	-	-	16	276	H
4	* 5.350099	52.25	RMS	34.50	0.00	-35.30	51.45	54	-2.55	-	-	16	276	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.16. 802.11n/ac MIMO MODE IN UNII-2A BAND – SPURIOUS EMISSIONS

20MHz

UNII-2A (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filtr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
HT20	5260	6+5	10.502893	54.34	PK-U	37.60	0.00	-44.69	47.25	-	-	68.2	-20.95	0	101	V
			10.510952	55.41	PK-U	37.60	0.00	-44.62	48.39	-	-	68.2	-19.81	0	101	H
			* 15.722287	50.21	PK-U	41.00	0.00	-40.85	50.36	-	-	74	-23.64	0	101	V
			* 15.737203	38.10	ADR	41.00	0.00	-40.76	38.34	54	-15.66	-	-	0	101	V
			* 15.741741	38.28	ADR	41.00	0.00	-40.68	38.60	54	-15.4	-	-	0	101	H
			* 15.759870	49.66	PK-U	41.10	0.00	-40.92	49.84	-	-	74	-24.16	0	101	H
			* 17.972363	35.50	ADR	42.10	0.00	-35.67	41.93	54	-12.07	-	-	0	101	V
			* 17.973155	46.67	PK-U	42.10	0.00	-35.63	53.14	-	-	74	-20.86	0	200	H
			* 17.978660	47.52	PK-U	42.10	0.00	-35.52	54.10	-	-	74	-19.9	0	101	V
			* 17.981164	35.26	ADR	42.10	0.00	-35.45	41.91	54	-12.09	-	-	0	200	H
	5300		10.592922	54.81	PK-U	37.60	0.00	-44.25	48.16	-	-	68.2	-20.04	0	101	H
			10.598678	54.28	PK-U	37.60	0.00	-44.44	47.44	-	-	68.2	-20.76	0	200	V
			* 15.888937	49.35	PK-U	41.20	0.00	-40.90	49.65	-	-	74	-24.35	0	200	V
			* 15.889539	49.50	PK-U	41.20	0.00	-40.92	49.78	-	-	74	-24.22	0	101	H
			* 15.913372	37.75	ADR	41.30	0.00	-40.92	38.13	54	-15.87	-	-	0	200	V
			* 15.917042	38.04	ADR	41.30	0.00	-41.01	38.33	54	-15.67	-	-	0	101	H
			* 17.964950	35.36	ADR	42.10	0.00	-35.63	41.83	54	-12.17	-	-	0	101	H
			* 17.967441	47.89	PK-U	42.10	0.00	-35.65	54.34	-	-	74	-19.66	0	101	V
			* 17.974825	46.97	PK-U	42.10	0.00	-35.61	53.46	-	-	74	-20.54	0	101	H
			* 17.982619	35.05	ADR	42.10	0.00	-35.38	41.77	54	-12.23	-	-	0	101	V
	5320		* 10.628540	54.80	PK-U	37.70	0.00	-44.51	47.99	-	-	74	-26.01	0	101	H
			* 10.653817	42.80	ADR	37.70	0.00	-44.21	36.29	54	-17.71	-	-	0	199	V
			* 10.655460	42.99	ADR	37.70	0.00	-44.25	36.44	54	-17.56	-	-	0	101	H
			* 10.660471	54.93	PK-U	37.70	0.00	-44.28	48.35	-	-	74	-25.65	0	199	V
			* 15.950587	49.78	PK-U	41.30	0.00	-40.70	50.38	-	-	74	-23.62	0	101	V
			* 15.950605	38.33	ADR	41.30	0.00	-40.70	38.93	54	-15.07	-	-	0	101	V
			* 15.976577	38.17	ADR	41.30	0.00	-40.82	38.65	54	-15.35	-	-	0	101	H
			* 15.978813	49.69	PK-U	41.30	0.00	-40.79	50.20	-	-	74	-23.8	0	101	H
			* 17.975705	35.56	ADR	42.10	0.00	-35.61	42.05	54	-11.95	-	-	0	101	H
			* 17.979430	47.92	PK-U	42.10	0.00	-35.51	54.51	-	-	74	-19.49	0	101	H
			* 17.991704	46.98	PK-U	42.10	0.00	-35.40	53.68	-	-	74	-20.32	0	101	V
			* 17.994026	35.43	ADR	42.10	0.00	-35.42	42.11	54	-11.89	-	-	0	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

40MHz

UNII-2A (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filtr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
HT40	5270	6+5	3.045180	58.03	PK-U	32.90	0.00	-47.68	43.25	-	-	68.2	-24.95	185	120	V
			3.056344	58.41	PK-U	32.90	0.00	-47.73	43.58	-	-	68.2	-24.62	328	352	H
			10.198541	55.99	PK-U	37.40	0.00	-45.26	48.13	-	-	68.2	-20.07	19	381	H
			10.236424	55.97	PK-U	37.50	0.00	-45.08	48.39	-	-	68.2	-19.81	319	375	V
			17.647997	47.58	PK-U	42.00	0.00	-35.48	54.10	-	-	68.2	-14.1	4	389	V
			17.653508	47.63	PK-U	42.00	0.00	-35.52	54.11	-	-	68.2	-14.09	198	390	H
	5310		7.215115	56.16	PK-U	35.70	0.00	-45.77	46.09	-	-	68.2	-22.11	319	364	H
			7.230150	56.24	PK-U	35.70	0.00	-45.97	45.97	-	-	68.2	-22.23	187	379	V
			10.311682	55.48	PK-U	37.50	0.00	-45.08	47.90	-	-	68.2	-20.3	31	384	V
			10.316019	56.10	PK-U	37.50	0.00	-44.97	48.63	-	-	68.2	-19.57	53	389	H
			17.641589	45.97	PK-U	42.00	0.00	-35.70	52.27	-	-	68.2	-15.93	126	193	V
			17.658809	47.20	PK-U	42.00	0.00	-35.93	53.27	-	-	68.2	-14.93	157	389	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

80MHz

UNII-2A (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filtr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
VHT80	5290	6+5	* 4.788843	57.91	PK-U	34.40	0.00	-47.88	44.43	-	-	74	-29.57	252	132	V
			* 4.814910	46.24	ADR	34.40	0.00	-47.94	32.70	54	-21.3	-	-	252	132	V
			* 4.815503	57.70	PK-U	34.40	0.00	-47.93	44.17	-	-	74	-29.83	239	141	H
			* 4.823483	46.50	ADR	34.40	0.00	-47.78	33.12	54	-20.88	-	-	239	141	H
			* 12.603253	52.35	PK-U	39.00	0.00	-41.60	49.75	-	-	74	-24.25	8	389	V
			* 12.615078	52.42	PK-U	39.00	0.00	-41.70	49.72	-	-	74	-24.28	339	382	H
			* 12.629133	40.92	ADR	39.00	0.00	-41.48	38.44	54	-15.56	-	-	8	389	V
			* 12.632687	40.69	ADR	39.00	0.00	-41.43	38.26	54	-15.74	-	-	339	382	H
			17.644383	47.49	PK-U	42.00	0.00	-35.63	53.86	-	-	68.2	-14.34	328	397	V
			17.648528	46.74	PK-U	42.00	0.00	-35.50	53.24	-	-	68.2	-14.96	308	371	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.1.17. 802.11be MIMO SU MODE IN UNII-2A BAND – SPURIOUS EMISSIONS

20MHz

UNII-2A (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fltr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 SU Mode	5260	6+5	1.920382	62.16	PK-U	31.20	0.00	-50.25	43.11	-	-	68.2	-25.09	0	101	V
			1.921502	61.71	PK-U	31.20	0.00	-50.26	42.65	-	-	68.2	-25.55	0	199	H
			* 3.847958	45.60	ADR	33.40	0.00	-47.34	31.66	54	-22.34	-	-	0	199	H
			* 3.849272	45.54	ADR	33.40	0.00	-47.29	31.65	54	-22.35	-	-	0	200	V
			* 3.870372	57.10	PK-U	33.40	0.00	-47.24	43.26	-	-	74	-30.74	0	200	V
			* 3.874405	57.52	PK-U	33.40	0.00	-47.21	43.71	-	-	74	-30.29	0	199	H
			* 11.889108	51.08	PK-U	38.70	0.00	-42.51	47.27	-	-	74	-26.73	0	200	H
			* 11.893864	39.52	ADR	38.70	0.00	-42.39	35.83	54	-18.17	-	-	0	200	H
			* 11.898378	39.63	ADR	38.70	0.00	-42.43	35.90	54	-18.1	-	-	0	200	V
			* 11.914916	51.45	PK-U	38.70	0.00	-42.45	47.70	-	-	74	-26.3	0	200	V
	5300		* 7.458165	56.21	PK-U	35.70	0.00	-45.80	46.11	-	-	74	-27.89	360	201	V
			* 7.468121	55.59	PK-U	35.70	0.00	-45.80	45.49	-	-	74	-28.51	360	100	H
			* 7.470043	44.07	ADR	35.70	0.00	-45.78	33.99	54	-20.01	-	-	360	100	H
			* 7.470391	43.94	ADR	35.70	0.00	-45.78	33.86	54	-20.14	-	-	360	201	V
			14.942324	56.28	PK-U	39.90	0.00	-43.19	52.99	-	-	68.2	-15.21	360	200	V
			14.964624	56.57	PK-U	39.90	0.00	-43.34	53.13	-	-	68.2	-15.07	360	100	H
			9.604651	57.28	PK-U	37.10	0.00	-45.13	49.25	-	-	68.2	-18.95	360	100	H
			9.611269	56.61	PK-U	37.10	0.00	-44.96	48.75	-	-	68.2	-19.45	360	200	V
	5320		* 7.261494	56.04	PK-U	35.60	0.00	-45.98	45.66	-	-	74	-28.34	360	100	H
			* 7.26157	44.05	ADR	35.60	0.00	-45.99	33.66	54	-20.34	-	-	360	201	V
			* 7.269039	44.11	ADR	35.60	0.00	-46.01	33.70	54	-20.3	-	-	360	100	H
			* 7.281122	55.84	PK-U	35.60	0.00	-46.01	45.43	-	-	74	-28.57	360	201	V
			14.800541	56.61	PK-U	39.80	0.00	-42.87	53.54	-	-	68.2	-14.66	360	100	H
			14.820946	57.04	PK-U	39.80	0.00	-43.43	53.41	-	-	68.2	-14.79	360	200	V
			9.556304	56.59	PK-U	37.00	0.00	-45.35	48.24	-	-	68.2	-19.96	360	200	V
			9.575390	57.73	PK-U	37.10	0.00	-45.22	49.61	-	-	68.2	-18.59	360	100	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

40MHz

UNII-2A (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fltr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT40 SU Mode	5270	6+5	3.033373	58.93	PK-U	32.90	0.00	-47.62	44.21	-	-	68.2	-23.99	2	300	V
			3.050052	58.32	PK-U	32.90	0.00	-47.71	43.51	-	-	68.2	-24.69	215	183	H
			* 10.660027	43.19	ADR	37.70	0.00	-44.27	36.62	54	-17.38	-	-	266	383	V
			* 10.676611	54.76	PK-U	37.70	0.00	-43.97	48.49	-	-	74	-25.51	48	378	H
			* 10.681398	43.38	ADR	37.70	0.00	-44.13	36.95	54	-17.05	-	-	48	378	H
			* 10.687681	55.77	PK-U	37.70	0.00	-44.27	49.20	-	-	74	-24.8	266	383	V
			17.645796	46.31	PK-U	42.00	0.00	-35.59	52.72	-	-	68.2	-15.48	217	349	H
			17.646702	46.91	PK-U	42.00	0.00	-35.62	53.29	-	-	68.2	-14.91	253	353	V
	5310		* 9.000794	42.56	ADR	36.20	0.00	-44.48	34.28	54	-19.72	-	-	360	200	V
			* 9.018526	54.02	PK-U	36.20	0.00	-44.48	45.74	-	-	74	-28.26	360	101	H
			* 9.027634	54.38	PK-U	36.20	0.00	-44.44	46.14	-	-	74	-27.86	360	200	V
			* 9.031046	42.71	ADR	36.20	0.00	-44.36	34.55	54	-19.45	-	-	360	101	H
			* 10.609323	53.65	PK-U	37.70	0.00	-44.45	46.90	-	-	74	-27.1	360	101	V
			* 10.639887	42.53	ADR	37.70	0.00	-44.41	35.82	54	-18.18	-	-	360	101	H
			* 10.640861	42.54	ADR	37.70	0.00	-44.39	35.85	54	-18.15	-	-	360	101	V
			* 10.645220	54.16	PK-U	37.70	0.00	-44.22	47.64	-	-	74	-26.36	360	101	H
			* 15.932258	37.60	ADR	41.30	0.00	-40.90	38.00	54	-16	-	-	360	200	H
			* 15.933422	48.86	PK-U	41.30	0.00	-40.89	49.27	-	-	74	-24.73	360	200	H
			* 15.951234	49.43	PK-U	41.30	0.00	-40.68	50.05	-	-	74	-23.95	360	200	V
			* 15.952914	37.62	ADR	41.30	0.00	-40.62	38.30	54	-15.7	-	-	360	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

80MHz

UNII-2A (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filtr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT80 SU Mode	5290	6+5	* 9.003594	54.56	PK-U	36.20	0.00	-44.45	46.31	-	-	74	-27.69	360	101	V
			* 9.028221	43.23	ADR	36.20	0.00	-44.44	34.99	54	-19.01	-	-	360	101	V
			* 9.030540	54.99	PK-U	36.20	0.00	-44.36	46.83	-	-	74	-27.17	360	101	H
			* 9.034975	43.13	ADR	36.20	0.00	-44.29	35.04	54	-18.96	-	-	360	101	H
			10.593380	53.96	PK-U	37.60	0.00	-44.27	47.29	-	-	68.2	-20.91	360	200	V
			10.596623	54.39	PK-U	37.60	0.00	-44.38	47.61	-	-	68.2	-20.59	360	101	H
			* 15.868833	49.66	PK-U	41.20	0.00	-41.09	49.77	-	-	74	-24.23	360	200	V
			* 15.879542	49.54	PK-U	41.20	0.00	-41.05	49.69	-	-	74	-24.31	360	200	H
			* 15.891336	37.69	ADR	41.20	0.00	-40.93	37.96	54	-16.04	-	-	360	200	V
			* 15.896609	37.61	ADR	41.30	0.00	-40.90	38.01	54	-15.99	-	-	360	200	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

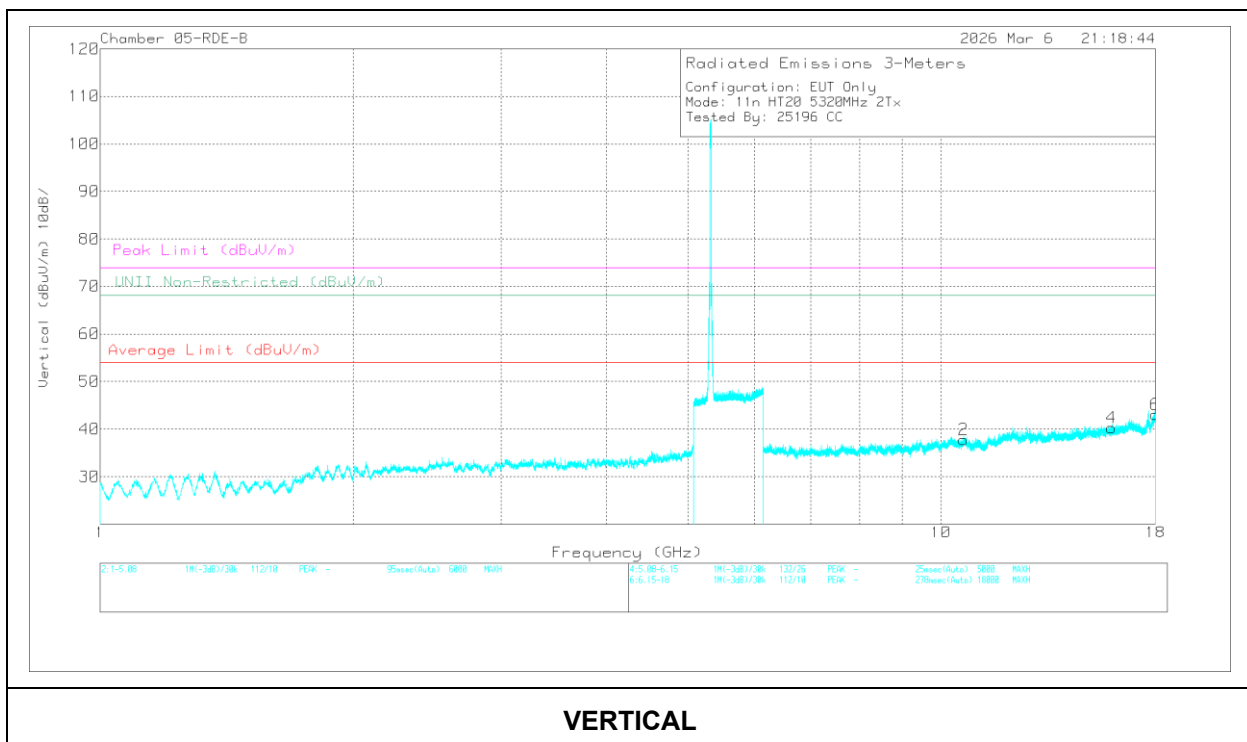
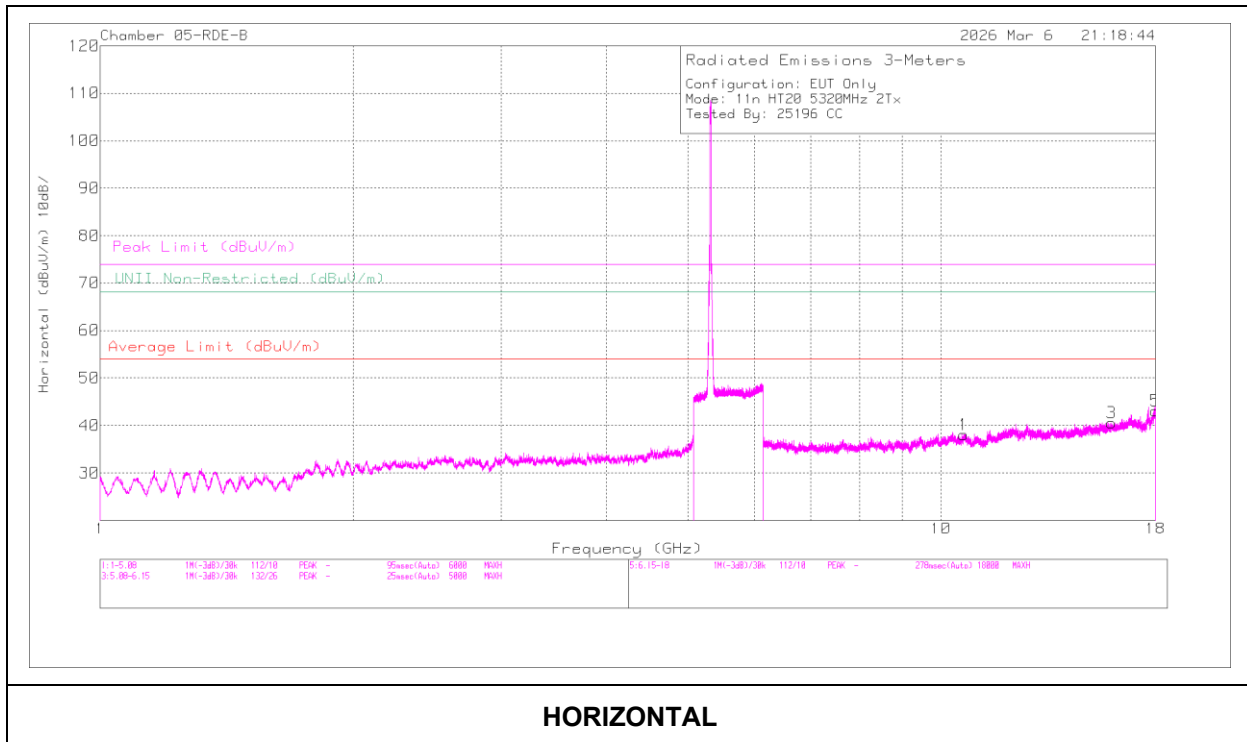
1.1.18. 802.11be MIMO PARTIAL RU MODE IN UNII-2A BAND – SPURIOUS EMISSIONS

UNII-2A (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filt/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 52+26T - RU70	5260	6+5	* 8.075921	54.66	PK-U	35.90	0.00	-44.78	45.78	-	-	74	-28.22	360	200	H
			* 8.100401	43.29	ADR	35.90	0.00	-44.71	34.48	54	-19.52	-	-	360	200	H
			* 8.081056	54.95	PK-U	35.90	0.00	-44.89	45.96	-	-	74	-28.04	360	101	V
			* 8.099452	43.77	ADR	35.90	0.00	-44.71	34.96	54	-19.04	-	-	360	101	V
			3.043118	57.77	PK-U	32.90	0.00	-47.68	42.99	-	-	68.2	-25.21	360	101	V
			3.044985	57.71	PK-U	32.90	0.00	-47.68	42.93	-	-	68.2	-25.27	360	101	H
			13.951947	51.35	PK-U	39.40	0.00	-42.72	48.03	-	-	68.2	-20.17	360	200	H
			13.966430	51.53	PK-U	39.40	0.00	-42.63	48.30	-	-	68.2	-19.9	360	101	V
EHT20 52+26T - RU71	5300	6+5	* 8.152991	54.32	PK-U	35.90	0.00	-44.56	45.66	-	-	74	-28.34	360	101	H
			* 8.150698	42.69	ADR	35.90	0.00	-44.58	34.01	54	-19.99	-	-	360	101	H
			* 8.179148	54.90	PK-U	35.90	0.00	-44.46	46.34	-	-	74	-27.66	360	101	V
			* 8.157384	42.96	ADR	35.90	0.00	-44.57	34.29	54	-19.71	-	-	360	101	V
			3.090911	57.23	PK-U	33.00	0.00	-47.79	42.44	-	-	68.2	-25.76	360	101	H
			3.111571	57.83	PK-U	33.00	0.00	-47.89	42.94	-	-	68.2	-25.26	360	200	V
			13.668524	51.97	PK-U	39.30	0.00	-42.39	48.88	-	-	68.2	-19.32	360	101	V
			13.685559	52.10	PK-U	39.30	0.00	-42.46	48.94	-	-	68.2	-19.26	360	101	H
EHT20 52+26T - RU72	5320	6+5	* 3.847521	45.39	ADR	33.40	0.00	-47.35	31.44	54	-22.56	-	-	360	101	H
			* 3.848415	45.57	ADR	33.40	0.00	-47.32	31.65	54	-22.35	-	-	360	101	V
			* 3.848454	56.86	PK-U	33.40	0.00	-47.32	42.94	-	-	74	-31.06	360	101	H
			* 3.851962	56.97	PK-U	33.40	0.00	-47.19	43.18	-	-	74	-30.82	360	101	V
			16.910532	48.96	PK-U	42.00	0.00	-40.00	50.96	-	-	68.2	-17.24	360	101	H
			16.920477	48.77	PK-U	42.00	0.00	-39.98	50.79	-	-	68.2	-17.41	360	101	V
			9.841411	55.24	PK-U	37.00	0.00	-45.19	47.05	-	-	68.2	-21.15	360	101	V
			9.854498	55.59	PK-U	37.00	0.00	-45.39	47.20	-	-	68.2	-21	360	101	H
EHT80 48+242T - RU92	5290	6+5	* 3.983474	57.67	PK-U	33.40	0.00	-47.31	43.76	-	-	74	-30.24	360	101	H
			* 3.964034	45.91	ADR	33.30	0.00	-47.51	31.70	54	-22.3	-	-	360	101	H
			* 3.973681	57.71	PK-U	33.30	0.00	-47.64	43.37	-	-	74	-30.63	360	101	V
			* 3.962487	46.01	ADR	33.30	0.00	-47.55	31.76	54	-22.24	-	-	360	101	V
			* 11.060654	56.39	PK-U	37.60	0.00	-45.14	48.85	-	-	74	-25.15	360	101	H
			* 11.091614	44.50	ADR	37.60	0.00	-45.07	37.03	54	-16.97	-	-	360	101	H
			* 15.716158	53.87	PK-U	41.20	0.00	-42.19	52.88	-	-	74	-21.12	360	101	H
			* 15.734372	42.22	ADR	41.20	0.00	-42.20	41.22	54	-12.78	-	-	360	101	H
			* 11.074260	56.68	PK-U	37.60	0.00	-45.01	49.27	-	-	74	-24.73	360	101	V
			* 11.086371	44.63	ADR	37.60	0.00	-44.98	37.25	54	-16.75	-	-	360	101	V
			* 15.736458	53.84	PK-U	41.20	0.00	-42.21	52.83	-	-	74	-21.17	360	101	V
			* 15.738494	42.06	ADR	41.20	0.00	-42.18	41.08	54	-12.92	-	-	360	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

WORST-CASE HARMONICS AND SPURIOUS EMISSIONS**802.11n HT20 / 5320 MHz / 2TX CDD**

Radiated Emissions

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filt/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 10.628540	54.80	PK-U	37.70	0.00	-44.51	47.99	-	-	74	-26.01	0	101	H
2	* 10.653817	42.80	ADR	37.70	0.00	-44.21	36.29	54	-17.71	-	-	0	199	V
1	* 10.655460	42.99	ADR	37.70	0.00	-44.25	36.44	54	-17.56	-	-	0	101	H
2	* 10.660471	54.93	PK-U	37.70	0.00	-44.28	48.35	-	-	74	-25.65	0	199	V
4	* 15.950587	49.78	PK-U	41.30	0.00	-40.70	50.38	-	-	74	-23.62	0	101	V
4	* 15.950605	38.33	ADR	41.30	0.00	-40.70	38.93	54	-15.07	-	-	0	101	V
3	* 15.976577	38.17	ADR	41.30	0.00	-40.82	38.65	54	-15.35	-	-	0	101	H
3	* 15.978813	49.69	PK-U	41.30	0.00	-40.79	50.20	-	-	74	-23.8	0	101	H
5	* 17.975705	35.56	ADR	42.10	0.00	-35.61	42.05	54	-11.95	-	-	0	101	H
5	* 17.979430	47.92	PK-U	42.10	0.00	-35.51	54.51	-	-	74	-19.49	0	101	H
6	* 17.991704	46.98	PK-U	42.10	0.00	-35.40	53.68	-	-	74	-20.32	0	101	V
6	* 17.994026	35.43	ADR	42.10	0.00	-35.42	42.11	54	-11.89	-	-	0	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.1.19. 802.11n/ac SISO MODE IN UNII-2C BAND – BANDEDGE**20MHz**

UNII-2C (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
HT20	5500	6	* 5.460000	54.59	Pk	34.40	0.00	-32.57	56.42	-	-	74	-17.58	167	105	H
			* 5.351133	57.11	Pk	34.60	0.00	-32.59	59.12	-	-	74	-14.88	167	105	H
			* 5.460000	43.22	RMS	34.40	0.00	-32.57	45.05	54	-8.95	-	-	167	105	H
			* 5.374644	44.66	RMS	34.50	0.00	-32.62	46.54	54	-7.46	-	-	167	105	H
			* 5.374644	44.66	RMS	34.50	0.00	-32.62	46.54	54	-7.46	-	-	167	105	H
			5.469465	60.94	Pk	34.40	0.00	-32.53	62.81	-	-	68.2	-5.39	167	105	H
			5.470000	57.81	Pk	34.40	0.00	-32.54	59.67	-	-	68.2	-8.53	167	105	H
			* 5.460000	53.42	Pk	34.40	0.00	-32.57	55.25	-	-	74	-18.75	179	117	V
			* 5.421155	56.64	Pk	34.50	0.00	-32.57	58.57	-	-	74	-15.43	179	117	V
			* 5.460000	43.24	RMS	34.40	0.00	-32.57	45.07	54	-8.93	-	-	179	117	V
			* 5.372400	44.53	RMS	34.60	0.00	-32.63	46.50	54	-7.50	-	-	179	117	V
			* 5.372400	44.53	RMS	34.60	0.00	-32.63	46.50	54	-7.50	-	-	179	117	V
			5.469221	57.37	Pk	34.40	0.00	-32.53	59.24	-	-	68.2	-8.96	179	117	V
			5.470000	55.34	Pk	34.40	0.00	-32.54	57.20	-	-	68.2	-11.00	179	117	V
		5	* 5.460000	55.94	Pk	34.80	0.00	-34.90	55.84	-	-	74	-18.16	235	101	H
			* 5.452777	58.22	Pk	34.80	0.00	-34.90	58.12	-	-	74	-15.88	235	101	H
			5.470000	61.34	Pk	34.80	0.00	-34.80	61.34	-	-	68.2	-6.66	235	101	H
			5.469932	63.55	Pk	34.80	0.00	-34.80	63.55	-	-	68.2	-4.65	235	101	H
			* 5.460000	45.34	RMS	34.80	0.00	-34.90	45.24	54	-8.76	-	-	235	101	H
			* 5.457399	45.95	RMS	34.80	0.00	-34.90	45.85	54	-8.15	-	-	235	101	H
			* 5.457399	45.95	RMS	34.80	0.00	-34.90	45.85	54	-8.15	-	-	235	101	H
			* 5.460000	55.19	Pk	34.80	0.00	-34.90	55.09	-	-	74	-18.91	320	147	V
			* 5.437199	57.91	Pk	34.80	0.00	-35.00	57.71	-	-	74	-16.29	320	147	V
			5.470000	58.28	Pk	34.80	0.00	-34.80	58.28	-	-	68.2	-9.92	320	147	V
			5.469443	59.99	Pk	34.80	0.00	-34.80	59.99	-	-	68.2	-8.21	320	147	V
			* 5.460000	44.74	RMS	34.80	0.00	-34.90	44.64	54	-9.36	-	-	320	147	V
			* 5.454643	45.57	RMS	34.80	0.00	-34.90	45.47	54	-8.53	-	-	320	147	V
			* 5.454643	45.57	RMS	34.80	0.00	-34.90	45.47	54	-8.53	-	-	320	147	V
	5700	6	5.725000	60.47	Pk	34.60	0.00	-32.20	62.87	-	-	68.2	-5.33	147	321	H
			5.725644	61.13	Pk	34.60	0.00	-32.19	63.54	-	-	68.2	-4.66	147	321	H
			5.725000	54.91	Pk	34.60	0.00	-32.20	57.31	-	-	68.2	-10.89	157	103	V
			5.810893	56.60	Pk	34.80	0.00	-32.06	59.34	-	-	68.2	-8.86	157	103	V
		5	5.725000	61.56	Pk	34.90	0.00	-34.60	61.86	-	-	68.2	-6.34	270	109	H
			5.725662	62.70	Pk	34.90	0.00	-34.60	63.00	-	-	68.2	-5.20	270	109	H
			5.725000	56.92	Pk	34.90	0.00	-34.60	57.22	-	-	68.2	-10.98	316	124	V
			5.725334	60.49	Pk	34.90	0.00	-34.60	60.79	-	-	68.2	-7.41	316	124	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

40MHz

UNII-2C (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
HT40	5510	6	* 5.460000	57.16	Pk	34.50	0.00	-35.67	55.99	-	-	74	-18.01	85	119	H
			* 5.458443	61.79	Pk	34.50	0.00	-35.64	60.65	-	-	74	-13.35	85	119	H
			5.470000	62.54	Pk	34.50	0.00	-35.56	61.48	-	-	68.2	-6.72	85	119	H
			5.468621	63.89	Pk	34.50	0.00	-35.57	62.82	-	-	68.2	-5.38	85	119	H
			* 5.460000	46.26	RMS	34.50	0.00	-35.67	45.09	54	-8.91	-	-	85	119	H
			* 5.455599	47.18	RMS	34.50	0.00	-35.64	46.04	54	-7.96	-	-	85	119	H
			* 5.455599	47.18	RMS	34.50	0.00	-35.64	46.04	54	-7.96	-	-	85	119	H
			* 5.460000	56.62	Pk	34.50	0.00	-35.67	55.45	-	-	74	-18.55	109	151	V
			* 5.424955	59.00	Pk	34.50	0.00	-35.66	57.84	-	-	74	-16.16	109	151	V
			5.470000	56.93	Pk	34.50	0.00	-35.56	55.87	-	-	68.2	-12.33	109	151	V
			5.469932	59.38	Pk	34.50	0.00	-35.56	58.32	-	-	68.2	-9.88	109	151	V
			* 5.460000	46.46	RMS	34.50	0.00	-35.67	45.29	54	-8.71	-	-	109	151	V
			* 5.426377	47.15	RMS	34.50	0.00	-35.64	46.01	54	-7.99	-	-	109	151	V
			* 5.426377	47.15	RMS	34.50	0.00	-35.64	46.01	54	-7.99	-	-	109	151	V
		5	* 5.460000	53.02	Pk	34.90	0.00	-30.60	57.32	-	-	74	-16.68	10	103	H
			* 5.456838	54.59	Pk	34.90	0.00	-30.60	58.89	-	-	74	-15.11	10	103	H
			5.470000	55.44	Pk	34.90	0.00	-30.60	59.74	-	-	68.2	-8.46	10	103	H
			5.468714	58.79	Pk	34.90	0.00	-30.60	63.09	-	-	68.2	-5.11	10	103	H
			* 5.460000	40.79	RMS	34.90	0.00	-30.60	45.09	54	-8.91	-	-	10	103	H
			* 5.458613	41.27	RMS	34.90	0.00	-30.60	45.57	54	-8.43	-	-	10	103	H
			* 5.458613	41.27	RMS	34.90	0.00	-30.60	45.57	54	-8.43	-	-	10	103	H
			* 5.460000	50.46	Pk	34.90	0.00	-30.60	54.76	-	-	74	-19.24	58	219	V
			* 5.368852	53.22	Pk	35.00	0.00	-30.70	57.52	-	-	74	-16.48	58	219	V
			5.470000	52.68	Pk	34.90	0.00	-30.60	56.98	-	-	68.2	-11.22	58	219	V
			5.467814	55.40	Pk	34.90	0.00	-30.60	59.70	-	-	68.2	-8.50	58	219	V
			* 5.460000	39.97	RMS	34.90	0.00	-30.60	44.27	54	-9.73	-	-	58	219	V
			* 5.387154	40.89	RMS	35.00	0.00	-30.70	45.19	54	-8.81	-	-	58	219	V
			* 5.387154	40.89	RMS	35.00	0.00	-30.70	45.19	54	-8.81	-	-	58	219	V
		6	5.725000	61.71	Pk	34.80	0.00	-35.06	61.45	-	-	68.2	-6.75	280	350	H
			5.725179	63.78	Pk	34.80	0.00	-35.06	63.52	-	-	68.2	-4.68	280	350	H
			5.725000	60.24	Pk	34.80	0.00	-35.06	59.98	-	-	68.2	-8.22	352	101	V
			5.727005	63.03	Pk	34.80	0.00	-35.03	62.80	-	-	68.2	-5.40	352	101	V
			5.725000	58.09	Pk	34.60	0.00	-30.20	62.49	-	-	68.2	-5.71	321	160	H
			5.725283	58.91	Pk	34.60	0.00	-30.20	63.31	-	-	68.2	-4.89	321	160	H
	5670	5	5.725000	53.50	Pk	34.60	0.00	-30.20	57.90	-	-	68.2	-10.30	49	164	V
			5.727550	55.53	Pk	34.60	0.00	-30.10	60.03	-	-	68.2	-8.17	49	164	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

80MHz

UNII-2C (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
VHT80	5530	6	* 5.460000	56.69	Pk	34.50	0.00	-34.10	57.09	-	-	74	-16.91	15	317	H
			* 5.455638	58.71	Pk	34.50	0.00	-34.10	59.11	-	-	74	-14.89	15	317	H
			5.470000	62.20	Pk	34.50	0.00	-34.10	62.60	-	-	68.2	-5.60	15	317	H
			5.468689	62.64	Pk	34.50	0.00	-34.10	63.04	-	-	68.2	-5.16	15	317	H
			* 5.460000	42.13	RMS	34.50	0.00	-34.10	42.53	54	-11.47	-	-	15	317	H
			* 5.459438	43.08	RMS	34.50	0.00	-34.10	43.48	54	-10.52	-	-	15	317	H
			* 5.459438	43.08	RMS	34.50	0.00	-34.10	43.48	54	-10.52	-	-	15	317	H
			* 5.460000	55.18	Pk	34.50	0.00	-34.10	55.58	-	-	74	-18.42	58	105	V
			* 5.456963	56.52	Pk	34.50	0.00	-34.10	56.92	-	-	74	-17.08	58	105	V
			5.470000	58.79	Pk	34.50	0.00	-34.10	59.19	-	-	68.2	-9.01	58	105	V
			5.469889	60.98	Pk	34.50	0.00	-34.10	61.38	-	-	68.2	-6.82	58	105	V
			* 5.460000	41.69	RMS	34.50	0.00	-34.10	42.09	54	-11.91	-	-	58	105	V
			* 5.458363	42.76	RMS	34.50	0.00	-34.10	43.16	54	-10.84	-	-	58	105	V
			* 5.458363	42.76	RMS	34.50	0.00	-34.10	43.16	54	-10.84	-	-	58	105	V
		5	* 5.460000	53.98	Pk	34.90	0.00	-30.60	58.28	-	-	74	-15.72	327	166	H
			* 5.435960	55.71	Pk	35.00	0.00	-30.60	60.11	-	-	74	-13.89	327	166	H
			5.470000	56.39	Pk	34.90	0.00	-30.60	60.69	-	-	68.2	-7.51	327	166	H
			5.468764	59.12	Pk	34.90	0.00	-30.60	63.42	-	-	68.2	-4.78	327	166	H
			* 5.460000	41.47	RMS	34.90	0.00	-30.60	45.77	54	-8.23	-	-	327	166	H
			* 5.459663	42.63	RMS	34.90	0.00	-30.60	46.93	54	-7.07	-	-	327	166	H
			* 5.459663	42.63	RMS	34.90	0.00	-30.60	46.93	54	-7.07	-	-	327	166	H
			* 5.460000	51.53	Pk	34.90	0.00	-30.60	55.83	-	-	74	-18.17	44	211	V
			* 5.389505	53.18	Pk	35.00	0.00	-30.70	57.48	-	-	74	-16.52	44	211	V
			5.470000	52.12	Pk	34.90	0.00	-30.60	56.42	-	-	68.2	-11.78	44	211	V
			5.467864	54.57	Pk	34.90	0.00	-30.60	58.87	-	-	68.2	-9.33	44	211	V
			* 5.460000	39.62	RMS	34.90	0.00	-30.60	43.92	54	-10.08	-	-	44	211	V
			* 5.459788	41.05	RMS	34.90	0.00	-30.60	45.35	54	-8.65	-	-	44	211	V
			* 5.459788	41.05	RMS	34.90	0.00	-30.60	45.35	54	-8.65	-	-	44	211	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

160MHz

UNII-2C (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
VHT160	5570 (Lower)	6	* 5.460000	56.61	Pk	34.90	0.00	-30.60	60.91	-	-	74	-13.09	321	391	H
			* 5.442311	63.29	Pk	34.90	0.00	-30.60	67.59	-	-	74	-6.41	321	391	H
			5.470000	54.73	Pk	34.90	0.00	-30.60	59.03	-	-	68.2	-9.17	321	391	H
			5.463664	58.98	Pk	34.90	0.00	-30.60	63.28	-	-	68.2	-4.92	321	391	H
			* 5.460000	40.44	RMS	34.90	0.10	-30.60	44.84	54	-9.16	-	-	321	391	H
			* 5.438161	42.37	RMS	35.00	0.10	-30.60	46.87	54	-7.13	-	-	321	391	H
			* 5.438161	42.37	RMS	35.00	0.10	-30.60	46.87	54	-7.13	-	-	321	391	H
			* 5.460000	54.89	Pk	34.90	0.00	-30.60	59.19	-	-	74	-14.81	8	101	V
			* 5.442211	59.72	Pk	34.90	0.00	-30.60	64.02	-	-	74	-9.98	8	101	V
			5.470000	52.47	Pk	34.90	0.00	-30.60	56.77	-	-	68.2	-11.43	8	101	V
			5.462313	56.30	Pk	34.90	0.00	-30.60	60.60	-	-	68.2	-7.60	8	101	V
			* 5.460000	39.83	RMS	34.90	0.10	-30.60	44.23	54	-9.77	-	-	8	101	V
			* 5.438561	40.96	RMS	35.00	0.10	-30.60	45.46	54	-8.54	-	-	8	101	V
			* 5.438561	40.96	RMS	35.00	0.10	-30.60	45.46	54	-8.54	-	-	8	101	V
		5	* 5.460000	54.61	Pk	34.90	0.00	-30.60	58.91	-	-	74	-15.09	331	220	H
			* 5.441636	61.81	Pk	34.90	0.00	-30.60	66.11	-	-	74	-7.89	331	220	H
			5.470000	54.63	Pk	34.90	0.00	-30.60	58.93	-	-	68.2	-9.27	331	220	H
			5.463489	58.48	Pk	34.90	0.00	-30.60	62.78	-	-	68.2	-5.42	331	220	H
			* 5.460000	42.32	RMS	34.90	0.10	-30.60	46.72	54	-7.28	-	-	331	220	H
			* 5.442936	43.08	RMS	34.90	0.10	-30.60	47.48	54	-6.52	-	-	331	220	H
			* 5.442936	43.08	RMS	34.90	0.10	-30.60	47.48	54	-6.52	-	-	331	220	H
			* 5.460000	55.41	Pk	34.90	0.00	-30.60	59.71	-	-	74	-14.29	40	207	V
			* 5.442786	60.98	Pk	34.90	0.00	-30.60	65.28	-	-	74	-8.72	40	207	V
			5.470000	53.42	Pk	34.90	0.00	-30.60	57.72	-	-	68.2	-10.48	40	207	V
			5.462088	57.34	Pk	34.90	0.00	-30.60	61.64	-	-	68.2	-6.56	40	207	V
			* 5.460000	40.60	RMS	34.90	0.10	-30.60	45.00	54	-9.00	-	-	40	207	V
			* 5.437911	41.81	RMS	35.00	0.10	-30.60	46.31	54	-7.69	-	-	40	207	V
			* 5.437911	41.81	RMS	35.00	0.10	-30.60	46.31	54	-7.69	-	-	40	207	V
	5570 (Upper)	6	5.725000	58.68	Pk	34.60	0.00	-30.20	63.08	-	-	68.2	-5.12	327	368	H
			5.725091	58.72	Pk	34.60	0.00	-30.20	63.12	-	-	68.2	-5.08	327	368	H
			5.725000	50.89	Pk	34.60	0.00	-30.20	55.29	-	-	68.2	-12.91	253	101	V
			5.725378	52.54	Pk	34.60	0.00	-30.20	56.94	-	-	68.2	-11.26	253	101	V
		5	5.725000	58.18	Pk	34.60	0.00	-30.20	62.58	-	-	68.2	-5.62	358	224	H
			5.727195	58.96	Pk	34.60	0.00	-30.10	63.46	-	-	68.2	-4.74	358	224	H
5.725000			53.36	Pk	34.60	0.00	-30.20	57.76	-	-	68.2	-10.44	49	195	V	
5.725123			55.06	Pk	34.60	0.00	-30.20	59.46	-	-	68.2	-8.74	49	195	V	

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.20. 802.11n/ac MIMO MODE IN UNII-2C BAND – BANDEDGE**20MHz**

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
HT20	5500	6+5	* 5.460000	55.43	Pk	34.40	0.00	-32.57	57.26	-	-	74	-16.74	46	376	H
			* 5.355133	58.03	Pk	34.60	0.00	-32.64	59.99	-	-	74	-14.01	46	376	H
			* 5.460000	44.52	RMS	34.40	0.00	-32.57	46.35	54	-7.65	-	-	46	376	H
			* 5.459621	45.16	RMS	34.40	0.00	-32.58	46.98	54	-7.02	-	-	46	376	H
			* 5.459621	45.16	RMS	34.40	0.00	-32.58	46.98	54	-7.02	-	-	46	376	H
			5.468465	60.98	Pk	34.40	0.00	-32.52	62.86	-	-	68.2	-5.34	46	376	H
			5.470000	56.12	Pk	34.40	0.00	-32.54	57.98	-	-	68.2	-10.22	46	376	H
			* 5.460000	54.58	Pk	34.40	0.00	-32.57	56.41	-	-	74	-17.59	346	369	V
			* 5.376066	57.21	Pk	34.60	0.00	-32.62	59.19	-	-	74	-14.81	346	369	V
			* 5.460000	44.65	RMS	34.40	0.00	-32.57	46.48	54	-7.52	-	-	346	369	V
			* 5.428110	44.93	RMS	34.50	0.00	-32.57	46.86	54	-7.14	-	-	346	369	V
			* 5.428110	44.93	RMS	34.50	0.00	-32.57	46.86	54	-7.14	-	-	346	369	V
	5.468332		58.06	Pk	34.40	0.00	-32.52	59.94	-	-	68.2	-8.26	346	369	V	
	5.470000		54.72	Pk	34.40	0.00	-32.54	56.58	-	-	68.2	-11.62	346	369	V	
	5700		5.725000	57.47	Pk	34.90	0.00	-34.60	57.77	-	-	68.2	-10.43	261	195	H
			5.726936	62.45	Pk	34.90	0.00	-34.60	62.75	-	-	68.2	-5.45	261	195	H
			5.725000	57.72	Pk	34.90	0.00	-34.60	58.02	-	-	68.2	-10.18	295	122	V
			5.725059	60.89	Pk	34.90	0.00	-34.60	61.19	-	-	68.2	-7.01	295	122	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

40MHz

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
HT40	5510	6+5	* 5.460000	54.47	Pk	34.40	0.00	-32.57	56.30	-	-	74	-17.70	71	148	H
			* 5.457132	57.48	Pk	34.40	0.00	-32.56	59.32	-	-	74	-14.68	71	148	H
			* 5.460000	44.29	RMS	34.40	0.00	-32.57	46.12	54	-7.88	-	-	71	148	H
			* 5.372422	44.91	RMS	34.60	0.00	-32.63	46.88	54	-7.12	-	-	71	148	H
			* 5.372422	44.91	RMS	34.60	0.00	-32.63	46.88	54	-7.12	-	-	71	148	H
			5.466377	60.99	Pk	34.40	0.00	-32.54	62.85	-	-	68.2	-5.35	71	148	H
			5.470000	56.71	Pk	34.40	0.00	-32.54	58.57	-	-	68.2	-9.63	71	148	H
			* 5.460000	55.47	Pk	34.40	0.00	-32.57	57.30	-	-	74	-16.70	107	160	V
			* 5.429110	56.55	Pk	34.50	0.00	-32.58	58.47	-	-	74	-15.53	107	160	V
			* 5.460000	43.19	RMS	34.40	0.00	-32.57	45.02	54	-8.98	-	-	107	160	V
			* 5.397600	44.53	RMS	34.50	0.00	-32.61	46.42	54	-7.58	-	-	107	160	V
			* 5.397600	44.53	RMS	34.50	0.00	-32.61	46.42	54	-7.58	-	-	107	160	V
	5.463110		56.03	Pk	34.40	0.00	-32.55	57.88	-	-	68.2	-10.32	107	160	V	
	5.470000		53.85	Pk	34.40	0.00	-32.54	55.71	-	-	68.2	-12.49	107	160	V	
	5670		5.725000	55.51	Pk	34.60	0.00	-32.20	57.91	-	-	68.2	-10.29	61	107	H
			5.726002	60.52	Pk	34.60	0.00	-32.18	62.94	-	-	68.2	-5.26	61	107	H
			5.725000	54.81	Pk	34.60	0.00	-32.20	57.21	-	-	68.2	-10.99	354	157	V
			5.804654	56.83	Pk	34.80	0.00	-32.04	59.59	-	-	68.2	-8.61	354	157	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

80MHz

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filtr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
VHT80	5530	6+5	* 5.460000	56.45	Pk	34.50	0.00	-34.10	56.85	-	-	74	-17.15	190	189	H
			* 5.456963	59.42	Pk	34.50	0.00	-34.10	59.82	-	-	74	-14.18	190	189	H
			5.470000	61.26	Pk	34.50	0.00	-34.10	61.66	-	-	68.2	-6.54	190	189	H
			5.466564	63.10	Pk	34.50	0.00	-34.10	63.50	-	-	68.2	-4.70	190	189	H
			* 5.460000	42.90	RMS	34.50	0.00	-34.10	43.30	54	-10.7	-	-	190	189	H
			* 5.456063	43.98	RMS	34.50	0.00	-34.10	44.38	54	-9.62	-	-	190	189	H
			* 5.456063	43.98	RMS	34.50	0.00	-34.10	44.38	54	-9.62	-	-	190	189	H
			* 5.460000	53.89	Pk	34.50	0.00	-34.10	54.29	-	-	74	-19.71	235	133	V
			* 5.454988	55.36	Pk	34.50	0.00	-34.10	55.76	-	-	74	-18.24	235	133	V
			5.470000	57.26	Pk	34.50	0.00	-34.10	57.66	-	-	68.2	-10.54	235	133	V
			5.466464	59.35	Pk	34.50	0.00	-34.10	59.75	-	-	68.2	-8.45	235	133	V
			* 5.460000	42.14	RMS	34.50	0.00	-34.10	42.54	54	-11.46	-	-	235	133	V
			* 5.454813	42.85	RMS	34.50	0.00	-34.10	43.25	54	-10.75	-	-	235	133	V
			* 5.454813	42.85	RMS	34.50	0.00	-34.10	43.25	54	-10.75	-	-	235	133	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

160MHz

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filtr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
VHT160	5570 (Lower)	6+5	*5.460000	53.61	Pk	34.90	0.00	-30.60	57.91	-	-	74	-16.09	357	208	H
			*5.441686	62.51	Pk	34.90	0.00	-30.60	66.81	-	-	74	-7.19	357	208	H
			5.470000	54.44	Pk	34.90	0.00	-30.60	58.74	-	-	68.2	-9.46	357	208	H
			5.461763	58.52	Pk	34.90	0.00	-30.60	62.82	-	-	68.2	-5.38	357	208	H
			*5.460000	41.18	RMS	34.90	0.10	-30.60	45.58	54	-8.42	-	-	357	208	H
			*5.441511	43.40	RMS	34.90	0.10	-30.60	47.80	54	-6.20	-	-	357	208	H
			*5.441511	43.40	RMS	34.90	0.10	-30.60	47.80	54	-6.20	-	-	357	208	H
			*5.460000	52.15	Pk	34.90	0.00	-30.60	56.45	-	-	74	-17.55	41	200	V
			*5.439936	57.84	Pk	35.00	0.00	-30.60	62.24	-	-	74	-11.76	41	200	V
			5.470000	52.71	Pk	34.90	0.00	-30.60	57.01	-	-	68.2	-11.19	41	200	V
			5.464489	55.43	Pk	34.90	0.00	-30.60	59.73	-	-	68.2	-8.47	41	200	V
			*5.460000	40.46	RMS	34.90	0.10	-30.60	44.86	54	-9.14	-	-	41	200	V
			*5.453662	41.33	RMS	34.90	0.10	-30.60	45.73	54	-8.27	-	-	41	200	V
			*5.453662	41.33	RMS	34.90	0.10	-30.60	45.73	54	-8.27	-	-	41	200	V
VHT160	5570 (Upper)	6+5	5.725000	52.81	Pk	34.60	0.00	-30.20	57.21	-	-	68.2	-10.99	325	105	H
			5.727737	59.08	Pk	34.60	0.00	-30.10	63.58	-	-	68.2	-4.62	325	105	H
			5.725000	57.01	Pk	34.60	0.00	-30.20	61.41	-	-	68.2	-6.79	13	153	V
			5.726239	58.59	Pk	34.50	0.00	-30.20	62.89	-	-	68.2	-5.31	13	153	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.21. 802.11be SISO SU MODE IN UNII-2C BAND – BANDEDGE**20MHz**

UNII-2C (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 SU Mode	5500	6	* 5.460000	55.73	Pk	34.50	0.00	-35.50	54.73	-	-	74	-19.27	97	120	H
			* 5.407822	58.11	Pk	34.50	0.00	-35.50	57.11	-	-	74	-16.89	97	120	H
			5.470000	61.20	Pk	34.50	0.00	-35.60	60.10	-	-	68.2	-8.10	97	120	H
			5.469643	64.53	Pk	34.50	0.00	-35.60	63.43	-	-	68.2	-4.77	97	120	H
			* 5.460000	45.12	RMS	34.50	0.00	-35.50	44.12	54	-9.88	-	-	97	120	H
			* 5.378333	46.32	RMS	34.50	0.00	-35.50	45.32	54	-8.68	-	-	97	120	H
			* 5.378333	46.32	RMS	34.50	0.00	-35.50	45.32	54	-8.68	-	-	97	120	H
			* 5.460000	56.32	Pk	34.50	0.00	-35.50	55.32	-	-	74	-18.68	164	101	V
			* 5.384333	58.55	Pk	34.50	0.00	-35.50	57.55	-	-	74	-16.45	164	101	V
			5.470000	60.47	Pk	34.50	0.00	-35.60	59.37	-	-	68.2	-8.83	164	101	V
			5.468221	61.48	Pk	34.50	0.00	-35.60	60.38	-	-	68.2	-7.82	164	101	V
			* 5.460000	44.60	RMS	34.50	0.00	-35.50	43.60	54	-10.40	-	-	164	101	V
			* 5.390088	46.04	RMS	34.50	0.00	-35.40	45.14	54	-8.86	-	-	164	101	V
			* 5.390088	46.04	RMS	34.50	0.00	-35.40	45.14	54	-8.86	-	-	164	101	V
		5	* 5.460000	55.96	Pk	34.80	0.00	-34.90	55.86	-	-	74	-18.14	249	101	H
			* 5.452799	57.73	Pk	34.80	0.00	-34.90	57.63	-	-	74	-16.37	249	101	H
			5.470000	61.47	Pk	34.80	0.00	-34.80	61.47	-	-	68.2	-6.73	249	101	H
			5.469554	63.09	Pk	34.80	0.00	-34.80	63.09	-	-	68.2	-5.11	249	101	H
			* 5.460000	45.03	RMS	34.80	0.00	-34.90	44.93	54	-9.07	-	-	249	101	H
			* 5.450955	46.04	RMS	34.80	0.00	-34.90	45.94	54	-8.06	-	-	249	101	H
			* 5.450955	46.04	RMS	34.80	0.00	-34.90	45.94	54	-8.06	-	-	249	101	H
			* 5.460000	56.08	Pk	34.80	0.00	-34.90	55.98	-	-	74	-18.02	349	153	V
			* 5.455421	57.96	Pk	34.80	0.00	-34.90	57.86	-	-	74	-16.14	349	153	V
			5.470000	55.91	Pk	34.80	0.00	-34.80	55.91	-	-	68.2	-12.29	349	153	V
			5.469843	59.07	Pk	34.80	0.00	-34.80	59.07	-	-	68.2	-9.13	349	153	V
			* 5.460000	44.19	RMS	34.80	0.00	-34.90	44.09	54	-9.91	-	-	349	153	V
			* 5.434555	45.35	RMS	34.80	0.00	-34.80	45.35	54	-8.65	-	-	349	153	V
			* 5.434555	45.35	RMS	34.80	0.00	-34.80	45.35	54	-8.65	-	-	349	153	V
		6	5.725000	62.01	Pk	34.50	0.00	-35.00	61.51	-	-	68.2	-6.69	156	257	H
			5.725208	62.43	Pk	34.50	0.00	-35.00	61.93	-	-	68.2	-6.27	156	257	H
			5.725000	61.46	Pk	34.50	0.00	-35.00	60.96	-	-	68.2	-7.24	165	102	V
			5.725265	63.47	Pk	34.50	0.00	-35.00	62.97	-	-	68.2	-5.23	165	102	V
			5.725000	58.29	Pk	34.90	0.00	-34.60	58.59	-	-	68.2	-9.61	294	122	H
			5.725945	62.56	Pk	34.90	0.00	-34.60	62.86	-	-	68.2	-5.34	294	122	H
	5700	5	5.725000	57.10	Pk	34.90	0.00	-34.60	57.40	-	-	68.2	-10.80	347	102	V
			5.726030	58.48	Pk	34.90	0.00	-34.60	58.78	-	-	68.2	-9.42	347	102	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

40MHz

UNII-2C (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT40 SU Mode	5510	6	* 5.460000	57.17	Pk	35.00	0.00	-38.30	53.87	-	-	74	-20.13	277	111	H
			* 5.459243	61.79	Pk	35.00	0.00	-38.30	58.49	-	-	74	-15.51	277	111	H
			5.470000	59.77	Pk	35.00	0.00	-38.40	56.37	-	-	68.2	-11.83	277	111	H
			5.469110	66.42	Pk	35.00	0.00	-38.40	63.02	-	-	68.2	-5.18	277	111	H
			* 5.460000	46.74	RMS	35.00	0.00	-38.30	43.44	54	-10.56	-	-	277	111	H
			* 5.390977	48.07	RMS	35.00	0.00	-38.40	44.67	54	-9.33	-	-	277	111	H
			* 5.390977	48.07	RMS	35.00	0.00	-38.40	44.67	54	-9.33	-	-	277	111	H
			* 5.460000	57.05	Pk	35.00	0.00	-38.30	53.75	-	-	74	-20.25	288	104	V
			* 5.428221	59.56	Pk	35.00	0.00	-38.50	56.06	-	-	74	-17.94	288	104	V
			5.470000	57.74	Pk	35.00	0.00	-38.40	54.34	-	-	68.2	-13.86	288	104	V
			5.468665	61.25	Pk	35.00	0.00	-38.37	57.88	-	-	68.2	-10.32	288	104	V
			* 5.460000	46.10	RMS	35.00	0.00	-38.30	42.80	54	-11.20	-	-	288	104	V
			* 5.410844	47.66	RMS	35.10	0.00	-38.40	44.36	54	-9.64	-	-	288	104	V
			* 5.410844	47.66	RMS	35.10	0.00	-38.40	44.36	54	-9.64	-	-	288	104	V
		5	* 5.460000	51.69	Pk	34.90	0.00	-30.60	55.99	-	-	74	-18.01	357	192	H
			* 5.459463	55.96	Pk	34.90	0.00	-30.60	60.26	-	-	74	-13.74	357	192	H
			5.470000	57.11	Pk	34.90	0.00	-30.60	61.41	-	-	68.2	-6.79	357	192	H
			5.469064	58.72	Pk	34.90	0.00	-30.60	63.02	-	-	68.2	-5.18	357	192	H
			* 5.460000	40.63	RMS	34.90	0.00	-30.60	44.93	54	-9.07	-	-	357	192	H
			* 5.455238	41.39	RMS	34.90	0.00	-30.60	45.69	54	-8.31	-	-	357	192	H
			* 5.455238	41.39	RMS	34.90	0.00	-30.60	45.69	54	-8.31	-	-	357	192	H
			* 5.460000	50.55	Pk	34.90	0.00	-30.60	54.85	-	-	74	-19.15	37	202	V
			* 5.371428	53.13	Pk	35.00	0.00	-30.70	57.43	-	-	74	-16.57	37	202	V
			5.470000	51.28	Pk	34.90	0.00	-30.60	55.58	-	-	68.2	-12.62	37	202	V
			5.461763	52.89	Pk	34.90	0.00	-30.60	57.19	-	-	68.2	-11.01	37	202	V
			* 5.460000	39.83	RMS	34.90	0.00	-30.60	44.13	54	-9.87	-	-	37	202	V
			* 5.368627	41.07	RMS	35.00	0.00	-30.70	45.37	54	-8.63	-	-	37	202	V
			* 5.368627	41.07	RMS	35.00	0.00	-30.70	45.37	54	-8.63	-	-	37	202	V
	5670	6	5.725000	63.79	Pk	35.10	0.00	-37.50	61.39	-	-	68.2	-6.81	286	393	H
			5.725152	65.28	Pk	35.10	0.00	-37.52	62.86	-	-	68.2	-5.34	286	393	H
			5.725000	61.26	Pk	35.10	0.00	-37.50	58.86	-	-	68.2	-9.34	317	115	V
			5.725860	63.60	Pk	35.10	0.00	-37.59	61.11	-	-	68.2	-7.09	317	115	V
		5	5.725000	57.52	Pk	34.60	0.00	-30.20	61.92	-	-	68.2	-6.28	357	215	H
			5.727578	58.93	Pk	34.60	0.00	-30.10	63.43	-	-	68.2	-4.77	357	215	H
			5.725000	52.88	Pk	34.60	0.00	-30.20	57.28	-	-	68.2	-10.92	34	207	V
			5.725538	54.75	Pk	34.50	0.00	-30.20	59.05	-	-	68.2	-9.15	34	207	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

80MHz

UNII-2C (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT80 SU Mode	5530	6	* 5.460000	59.57	Pk	34.50	0.00	-36.86	57.21	-	-	74	-16.79	287	248	H
			* 5.457910	64.66	Pk	34.50	0.00	-36.86	62.30	-	-	74	-11.70	287	248	H
			5.470000	61.19	Pk	34.50	0.00	-36.83	58.86	-	-	68.2	-9.34	287	248	H
			5.463954	65.12	Pk	34.50	0.00	-36.84	62.78	-	-	68.2	-5.42	287	248	H
			* 5.460000	46.27	RMS	34.50	0.00	-36.86	43.91	54	-10.09	-	-	287	248	H
			* 5.458643	47.76	RMS	34.50	0.00	-36.85	45.41	54	-8.59	-	-	287	248	H
			* 5.458643	47.76	RMS	34.50	0.00	-36.85	45.41	54	-8.59	-	-	287	248	H
			* 5.460000	56.07	Pk	34.50	0.00	-36.86	53.71	-	-	74	-20.29	341	108	V
			* 5.458688	59.12	Pk	34.50	0.00	-36.85	56.77	-	-	74	-17.23	341	108	V
			5.470000	55.80	Pk	34.50	0.00	-36.83	53.47	-	-	68.2	-14.73	341	108	V
			5.469132	60.52	Pk	34.50	0.00	-36.82	58.20	-	-	68.2	-10.00	341	108	V
			* 5.460000	44.90	RMS	34.50	0.00	-36.86	42.54	54	-11.46	-	-	341	108	V
			* 5.357711	46.81	RMS	34.60	0.00	-36.98	44.43	54	-9.57	-	-	341	108	V
			* 5.357711	46.81	RMS	34.60	0.00	-36.98	44.43	54	-9.57	-	-	341	108	V
		5	* 5.460000	60.81	Pk	34.50	0.00	-36.86	58.45	-	-	74	-15.55	289	217	H
			* 5.458510	65.57	Pk	34.50	0.00	-36.85	63.22	-	-	74	-10.78	289	217	H
			5.470000	62.41	Pk	34.50	0.00	-36.83	60.08	-	-	68.2	-8.12	289	217	H
			5.467399	65.54	Pk	34.50	0.00	-36.82	63.22	-	-	68.2	-4.98	289	217	H
			* 5.460000	50.37	RMS	34.50	0.00	-36.86	48.01	54	-5.99	-	-	289	217	H
			* 5.458510	50.54	RMS	34.50	0.00	-36.85	48.19	54	-5.81	-	-	289	217	H
			* 5.458510	50.54	RMS	34.50	0.00	-36.85	48.19	54	-5.81	-	-	289	217	H
			* 5.460000	57.24	Pk	34.50	0.00	-36.86	54.88	-	-	74	-19.12	358	262	V
			* 5.459443	59.53	Pk	34.50	0.00	-36.85	57.18	-	-	74	-16.82	358	262	V
			5.470000	57.25	Pk	34.50	0.00	-36.83	54.92	-	-	68.2	-13.28	358	262	V
			5.460977	59.93	Pk	34.50	0.00	-36.84	57.59	-	-	68.2	-10.61	358	262	V
			* 5.460000	46.03	RMS	34.50	0.00	-36.86	43.67	54	-10.33	-	-	358	262	V
			* 5.353911	47.37	RMS	34.50	0.00	-37.01	44.86	54	-9.14	-	-	358	262	V
			* 5.353911	47.37	RMS	34.50	0.00	-37.01	44.86	54	-9.14	-	-	358	262	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

160MHz

UNII-2C (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT160 SU Mode	5570 (Lower)	6	* 5.460000	55.35	Pk	34.90	0.00	-30.60	59.65	-	-	74	-14.35	345	364	H
			* 5.441911	58.46	Pk	34.90	0.00	-30.60	62.76	-	-	74	-11.24	345	364	H
			5.470000	57.60	Pk	34.90	0.00	-30.60	61.90	-	-	68.2	-6.30	345	364	H
			5.467764	58.60	Pk	34.90	0.00	-30.60	62.90	-	-	68.2	-5.30	345	364	H
			* 5.460000	41.16	RMS	34.90	0.14	-30.60	45.60	54	-8.40	-	-	345	364	H
			* 5.430785	42.42	RMS	35.00	0.14	-30.60	46.96	54	-7.04	-	-	345	364	H
			* 5.430785	42.42	RMS	35.00	0.14	-30.60	46.96	54	-7.04	-	-	345	364	H
			* 5.460000	50.28	Pk	34.90	0.00	-30.60	54.58	-	-	74	-19.42	262	294	V
			* 5.437360	53.30	Pk	35.00	0.00	-30.60	57.70	-	-	74	-16.30	262	294	V
			5.470000	50.44	Pk	34.90	0.00	-30.60	54.74	-	-	68.2	-13.46	262	294	V
			5.466014	53.34	Pk	34.90	0.00	-30.60	57.64	-	-	68.2	-10.56	262	294	V
			* 5.460000	39.34	RMS	34.90	0.14	-30.60	43.78	54	-10.22	-	-	262	294	V
			* 5.425084	40.88	RMS	35.00	0.14	-30.60	45.42	54	-8.58	-	-	262	294	V
			* 5.425084	40.88	RMS	35.00	0.14	-30.60	45.42	54	-8.58	-	-	262	294	V
		5	* 5.460000	58.35	Pk	34.80	0.00	-34.90	58.25	-	-	74	-15.75	6	102	H
			* 5.453666	62.55	Pk	34.80	0.00	-34.90	62.45	-	-	74	-11.55	6	102	H
			5.470000	60.74	Pk	34.80	0.00	-34.80	60.74	-	-	68.2	-7.46	6	102	H
			5.469332	63.17	Pk	34.80	0.00	-34.80	63.17	-	-	68.2	-5.03	6	102	H
			* 5.460000	46.28	RMS	34.80	0.14	-34.90	46.32	54	-7.68	-	-	6	102	H
			* 5.446866	47.10	RMS	34.80	0.14	-34.90	47.14	54	-6.86	-	-	6	102	H
			* 5.446866	47.10	RMS	34.80	0.14	-34.90	47.14	54	-6.86	-	-	6	102	H
			* 5.460000	55.32	Pk	34.80	0.00	-34.90	55.22	-	-	74	-18.78	284	105	V
			* 5.444310	58.03	Pk	34.80	0.00	-34.90	57.93	-	-	74	-16.07	284	105	V
			5.470000	56.17	Pk	34.80	0.00	-34.80	56.17	-	-	68.2	-12.03	284	105	V
			5.460177	58.93	Pk	34.80	0.00	-34.90	58.83	-	-	68.2	-9.37	284	105	V
			* 5.460000	44.71	RMS	34.80	0.14	-34.90	44.75	54	-9.25	-	-	284	105	V
			* 5.456843	45.85	RMS	34.80	0.14	-34.90	45.89	54	-8.11	-	-	284	105	V
			* 5.456843	45.85	RMS	34.80	0.14	-34.90	45.89	54	-8.11	-	-	284	105	V
		6	5.725000	54.66	Pk	34.60	0.00	-30.20	59.06	-	-	68.2	-9.14	351	369	H
			5.726239	58.01	Pk	34.50	0.00	-30.20	62.31	-	-	68.2	-5.89	351	369	H
			5.725000	54.93	Pk	34.60	0.00	-30.20	59.33	-	-	68.2	-8.87	8	107	V
			5.726717	58.30	Pk	34.60	0.00	-30.10	62.80	-	-	68.2	-5.40	8	107	V
		5	5.725000	60.65	Pk	34.80	0.00	-36.54	58.91	-	-	68.2	-9.29	321	212	H
			5.726285	64.47	Pk	34.80	0.00	-36.55	62.72	-	-	68.2	-5.48	321	212	H
			5.725000	58.18	Pk	34.80	0.00	-36.54	56.44	-	-	68.2	-11.76	2	231	V
			5.726087	60.00	Pk	34.80	0.00	-36.56	58.24	-	-	68.2	-9.96	2	231	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.22. 802.11be SISO PARTIAL RU MODE IN UNII-2C BAND - BANDEDGE

20MHz

UNII-2C (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filtr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 52+26T - RU70	5500	6	* 5.460000	57.85	Pk	35.00	0.00	-38.30	54.55	-	-	74	-19.45	129	266	H
			* 5.407977	60.01	Pk	35.10	0.00	-38.40	56.71	-	-	74	-17.29	129	266	H
			5.470000	60.54	Pk	35.00	0.00	-38.40	57.14	-	-	68.2	-11.06	129	266	H
			5.468065	66.30	Pk	35.00	0.00	-38.31	62.99	-	-	68.2	-5.21	129	266	H
			* 5.460000	47.47	RMS	35.00	0.00	-38.30	44.17	54	-9.83	-	-	129	266	H
			* 5.459266	48.20	RMS	35.00	0.00	-38.30	44.90	54	-9.10	-	-	129	266	H
			* 5.459266	48.20	RMS	35.00	0.00	-38.30	44.90	54	-9.10	-	-	129	266	H
			* 5.460000	57.51	Pk	35.00	0.00	-38.30	54.21	-	-	74	-19.79	151	266	V
			* 5.453577	59.94	Pk	35.00	0.00	-38.36	56.58	-	-	74	-17.42	151	266	V
			5.470000	59.61	Pk	35.00	0.00	-38.40	56.21	-	-	68.2	-11.99	151	266	V
			5.467932	63.69	Pk	35.00	0.00	-38.30	60.39	-	-	68.2	-7.81	151	266	V
			* 5.460000	46.61	RMS	35.00	0.00	-38.30	43.31	54	-10.69	-	-	151	266	V
			* 5.450310	48.02	RMS	35.00	0.00	-38.30	44.72	54	-9.28	-	-	151	266	V
			* 5.450310	48.02	RMS	35.00	0.00	-38.30	44.72	54	-9.28	-	-	151	266	V
		5	* 5.460000	56.33	Pk	34.50	0.00	-36.86	53.97	-	-	74	-20.03	324	130	H
			* 5.365600	59.70	Pk	34.50	0.00	-36.96	57.24	-	-	74	-16.76	324	130	H
			5.470000	56.59	Pk	34.50	0.00	-36.83	54.26	-	-	68.2	-13.94	324	130	H
			5.462266	58.93	Pk	34.50	0.00	-36.83	56.60	-	-	68.2	-11.60	324	130	H
			* 5.460000	46.44	RMS	34.50	0.00	-36.86	44.08	54	-9.92	-	-	324	130	H
			* 5.374978	47.31	RMS	34.60	0.00	-36.92	44.99	54	-9.01	-	-	324	130	H
			* 5.374978	47.31	RMS	34.60	0.00	-36.92	44.99	54	-9.01	-	-	324	130	H
			* 5.460000	55.89	Pk	34.50	0.00	-36.86	53.53	-	-	74	-20.47	3	185	V
			* 5.380022	59.59	Pk	34.60	0.00	-36.94	57.25	-	-	74	-16.75	3	185	V
			5.470000	56.51	Pk	34.50	0.00	-36.83	54.18	-	-	68.2	-14.02	3	185	V
			5.468288	58.52	Pk	34.50	0.00	-36.83	56.19	-	-	68.2	-12.01	3	185	V
			* 5.460000	45.82	RMS	34.50	0.00	-36.86	43.46	54	-10.54	-	-	3	185	V
			* 5.387355	46.99	RMS	34.60	0.00	-36.91	44.68	54	-9.32	-	-	3	185	V
			* 5.387355	46.99	RMS	34.60	0.00	-36.91	44.68	54	-9.32	-	-	3	185	V
EHT20 52+26T - RU72	5700	6	5.725000	58.22	Pk	34.50	0.00	-34.41	58.31	-	-	68.2	-9.89	127	321	H
			5.725095	61.23	Pk	34.50	0.00	-34.41	61.32	-	-	68.2	-6.88	127	321	H
			5.725000	59.13	Pk	34.50	0.00	-34.41	59.22	-	-	68.2	-8.98	165	101	V
			5.725095	60.51	Pk	34.50	0.00	-34.41	60.60	-	-	68.2	-7.60	165	101	V
		5	5.725000	63.75	Pk	34.80	0.00	-36.54	62.01	-	-	68.2	-6.19	111	144	H
			5.725067	64.55	Pk	34.80	0.00	-36.54	62.81	-	-	68.2	-5.39	111	144	H
			5.725000	61.86	Pk	34.80	0.00	-36.54	60.12	-	-	68.2	-8.08	188	217	V
			5.725123	63.26	Pk	34.80	0.00	-36.54	61.52	-	-	68.2	-6.68	188	217	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

80MHz

UNII-2C (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT80 484+242T - RU93	5530	6	* 5.460000	58.96	Pk	34.70	0.00	-37.06	56.60	-	-	74	-17.40	306	299	H
			* 5.458688	64.29	Pk	34.70	0.00	-37.04	61.95	-	-	74	-12.05	306	299	H
			5.470000	61.43	Pk	34.70	0.00	-37.00	59.13	-	-	68.2	-9.07	306	299	H
			5.469799	65.48	Pk	34.70	0.00	-37.00	63.18	-	-	68.2	-5.02	306	299	H
			* 5.460000	46.04	RMS	34.70	0.00	-37.06	43.68	54	-10.32	-	-	306	299	H
			* 5.366578	47.84	RMS	34.70	0.00	-37.09	45.45	54	-8.55	-	-	306	299	H
			* 5.366578	47.84	RMS	34.70	0.00	-37.09	45.45	54	-8.55	-	-	306	299	H
			* 5.460000	56.52	Pk	34.70	0.00	-37.06	54.16	-	-	74	-19.84	212	150	V
			* 5.359933	59.64	Pk	34.80	0.00	-37.25	57.19	-	-	74	-16.81	212	150	V
			5.470000	56.19	Pk	34.70	0.00	-37.00	53.89	-	-	68.2	-14.31	212	150	V
			5.463599	59.38	Pk	34.70	0.00	-37.02	57.06	-	-	68.2	-11.14	212	150	V
			* 5.460000	46.02	RMS	34.70	0.00	-37.06	43.66	54	-10.34	-	-	212	150	V
			* 5.360955	47.50	RMS	34.80	0.00	-37.22	45.08	54	-8.92	-	-	212	150	V
			* 5.360955	47.50	RMS	34.80	0.00	-37.22	45.08	54	-8.92	-	-	212	150	V
		5	* 5.460000	61.48	Pk	34.70	0.00	-37.06	59.12	-	-	74	-14.88	112	191	H
			* 5.458021	63.34	Pk	34.70	0.00	-37.05	60.99	-	-	74	-13.01	112	191	H
			5.470000	62.34	Pk	34.70	0.00	-37.00	60.04	-	-	68.2	-8.16	112	191	H
			5.467865	65.99	Pk	34.70	0.00	-36.99	63.70	-	-	68.2	-4.50	112	191	H
			* 5.460000	46.43	RMS	34.70	0.00	-37.06	44.07	54	-9.93	-	-	112	191	H
			* 5.455999	47.85	RMS	34.70	0.00	-36.99	45.56	54	-8.44	-	-	112	191	H
			* 5.455999	47.85	RMS	34.70	0.00	-36.99	45.56	54	-8.44	-	-	112	191	H
			* 5.460000	56.57	Pk	34.70	0.00	-37.06	54.21	-	-	74	-19.79	75	261	V
			* 5.386755	59.21	Pk	34.80	0.00	-37.18	56.83	-	-	74	-17.17	75	261	V
			5.470000	56.55	Pk	34.70	0.00	-37.00	54.25	-	-	68.2	-13.95	75	261	V
			5.467599	58.07	Pk	34.70	0.00	-36.98	55.79	-	-	68.2	-12.41	75	261	V
			* 5.460000	45.53	RMS	34.70	0.00	-37.06	43.17	54	-10.83	-	-	75	261	V
			* 5.381711	47.33	RMS	34.80	0.00	-37.07	45.06	54	-8.94	-	-	75	261	V
			* 5.381711	47.33	RMS	34.80	0.00	-37.07	45.06	54	-8.94	-	-	75	261	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

160MHz

UNII-2C (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT160 996+484+ 242T - S99	5570 (Lower)	6	* 5.460000	63.30	Pk	34.60	0.00	-35.21	62.69	-	-	74	-11.31	119	322	H
			* 5.456754	67.18	Pk	34.60	0.00	-35.19	66.59	-	-	74	-7.41	119	322	H
			5.470000	59.42	Pk	34.60	0.00	-35.15	58.87	-	-	68.2	-9.33	119	322	H
			5.460110	63.74	Pk	34.60	0.00	-35.21	63.13	-	-	68.2	-5.07	119	322	H
			* 5.460000	46.79	RMS	34.60	0.00	-35.21	46.18	54	-7.82	-	-	119	322	H
			* 5.456910	48.10	RMS	34.60	0.00	-35.19	47.51	54	-6.49	-	-	119	322	H
			* 5.456910	48.10	RMS	34.60	0.00	-35.19	47.51	54	-6.49	-	-	119	322	H
			* 5.460000	62.69	Pk	34.60	0.00	-35.21	62.08	-	-	74	-11.92	24	111	V
			* 5.416466	66.73	Pk	34.60	0.00	-35.27	66.06	-	-	74	-7.94	24	111	V
			5.470000	60.46	Pk	34.60	0.00	-35.15	59.91	-	-	68.2	-8.29	24	111	V
			5.460110	64.23	Pk	34.60	0.00	-35.21	63.62	-	-	68.2	-4.58	24	111	V
			* 5.460000	45.80	RMS	34.60	0.00	-35.21	45.19	54	-8.81	-	-	24	111	V
			* 5.417310	47.91	RMS	34.60	0.00	-35.28	47.23	54	-6.77	-	-	24	111	V
			* 5.417310	47.91	RMS	34.60	0.00	-35.28	47.23	54	-6.77	-	-	24	111	V
		5	* 5.460000	63.56	Pk	34.70	0.00	-37.06	61.20	-	-	74	-12.80	282	100	H
			* 5.457066	67.28	Pk	34.70	0.00	-37.02	64.96	-	-	74	-9.04	282	100	H
			5.470000	60.97	Pk	34.70	0.00	-37.00	58.67	-	-	68.2	-9.53	282	100	H
			5.461754	65.62	Pk	34.70	0.00	-37.05	63.27	-	-	68.2	-4.93	282	100	H
			* 5.460000	47.24	RMS	34.70	0.00	-37.06	44.88	54	-9.12	-	-	282	100	H
			* 5.457999	48.52	RMS	34.70	0.00	-37.05	46.17	54	-7.83	-	-	282	100	H
			* 5.457999	48.52	RMS	34.70	0.00	-37.05	46.17	54	-7.83	-	-	282	100	H
			* 5.460000	58.20	Pk	34.70	0.00	-37.06	55.84	-	-	74	-18.16	358	217	V
			* 5.456310	61.52	Pk	34.70	0.00	-37.00	59.22	-	-	74	-14.78	358	217	V
			5.470000	58.29	Pk	34.70	0.00	-37.00	55.99	-	-	68.2	-12.21	358	217	V
			5.466688	59.28	Pk	34.70	0.00	-36.97	57.01	-	-	68.2	-11.19	358	217	V
			* 5.460000	46.37	RMS	34.70	0.00	-37.06	44.01	54	-9.99	-	-	358	217	V
			* 5.390400	47.46	RMS	34.80	0.00	-37.19	45.07	54	-8.93	-	-	358	217	V
			* 5.390400	47.46	RMS	34.80	0.00	-37.19	45.07	54	-8.93	-	-	358	217	V
EHT160 996+484+ 242T - RU96	5570 (Upper)	6	5.725000	60.92	Pk	35.10	0.00	-35.06	60.96	-	-	68.2	-7.24	338	331	H
			5.726483	62.83	Pk	35.10	0.00	-35.05	62.88	-	-	68.2	-5.32	338	331	H
			5.725000	59.36	Pk	35.10	0.00	-35.06	59.40	-	-	68.2	-8.80	341	100	V
		5	5.739431	62.25	Pk	35.10	0.00	-35.00	62.35	-	-	68.2	-5.85	341	100	V
			5.725000	57.85	Pk	34.80	0.00	-36.54	56.11	-	-	68.2	-12.09	321	212	H
			5.738496	65.11	Pk	34.80	0.00	-36.56	63.35	-	-	68.2	-4.85	321	212	H
		5	5.725000	56.27	Pk	34.80	0.00	-36.54	54.53	-	-	68.2	-13.67	2	231	V
			5.737306	60.92	Pk	34.80	0.00	-36.57	59.15	-	-	68.2	-9.05	2	231	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.23. 802.11be MIMO SU MODE IN UNII-2C BAND – BANDEDGE**20MHz**

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 SU Mode	5500	6+5	* 5.460000	57.86	Pk	35.00	0.00	-38.30	54.56	-	-	74	-19.44	279	103	H
			* 5.458288	60.50	Pk	35.00	0.00	-38.30	57.20	-	-	74	-16.80	279	103	H
			5.470000	61.58	Pk	35.00	0.00	-38.40	58.18	-	-	68.2	-10.02	279	103	H
			5.462577	66.64	Pk	35.00	0.00	-38.30	63.34	-	-	68.2	-4.86	279	103	H
			* 5.460000	46.97	RMS	35.00	0.00	-38.30	43.67	54	-10.33	-	-	279	103	H
			* 5.452866	48.14	RMS	35.00	0.00	-38.30	44.84	54	-9.16	-	-	279	103	H
			* 5.452866	48.14	RMS	35.00	0.00	-38.30	44.84	54	-9.16	-	-	279	103	H
			* 5.460000	56.92	Pk	35.00	0.00	-38.30	53.62	-	-	74	-20.38	310	107	V
			* 5.440088	59.87	Pk	35.00	0.00	-38.40	56.47	-	-	74	-17.53	310	107	V
			5.470000	59.81	Pk	35.00	0.00	-38.40	56.41	-	-	68.2	-11.79	310	107	V
			5.469777	60.50	Pk	35.00	0.00	-38.40	57.10	-	-	68.2	-11.10	310	107	V
			* 5.460000	46.12	RMS	35.00	0.00	-38.30	42.82	54	-11.18	-	-	310	107	V
	* 5.414599		47.51	RMS	35.10	0.00	-38.40	44.21	54	-9.79	-	-	310	107	V	
	* 5.414599		47.51	RMS	35.10	0.00	-38.40	44.21	54	-9.79	-	-	310	107	V	
	5700		5.725000	62.65	Pk	35.10	0.00	-35.06	62.69	-	-	68.2	-5.51	24	376	H
			5.726313	63.62	Pk	35.10	0.00	-35.05	63.67	-	-	68.2	-4.53	24	376	H
			5.725000	57.46	Pk	35.10	0.00	-35.06	57.50	-	-	68.2	-10.70	89	167	V
			5.725180	59.97	Pk	35.10	0.00	-35.06	60.01	-	-	68.2	-8.19	89	167	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

40MHz

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT40 SU Mode	5510	6+5	* 5.460000	55.22	Pk	34.60	0.00	-32.31	57.51	-	-	74	-16.49	153	100	H
			* 5.372133	57.53	Pk	34.50	0.00	-32.35	59.68	-	-	74	-14.32	153	100	H
			5.470000	55.29	Pk	34.60	0.00	-32.27	57.62	-	-	68.2	-10.58	153	100	H
			5.467643	60.43	Pk	34.60	0.00	-32.27	62.76	-	-	68.2	-5.44	153	100	H
			* 5.460000	43.94	RMS	34.60	0.00	-32.31	46.23	54	-7.77	-	-	153	100	H
			* 5.355178	45.42	RMS	34.60	0.00	-32.31	47.71	54	-6.29	-	-	153	100	H
			* 5.355178	45.42	RMS	34.60	0.00	-32.31	47.71	54	-6.29	-	-	153	100	H
			* 5.460000	54.87	Pk	34.60	0.00	-32.31	57.16	-	-	74	-16.84	226	156	V
			* 5.430733	57.16	Pk	34.60	0.00	-32.35	59.41	-	-	74	-14.59	226	156	V
			5.470000	54.99	Pk	34.60	0.00	-32.27	57.32	-	-	68.2	-10.88	226	156	V
			5.467754	57.83	Pk	34.60	0.00	-32.27	60.16	-	-	68.2	-8.04	226	156	V
			* 5.460000	43.76	RMS	34.60	0.00	-32.31	46.05	54	-7.95	-	-	226	156	V
			* 5.361644	45.34	RMS	34.60	0.00	-32.32	47.62	54	-6.38	-	-	226	156	V
			* 5.361644	45.34	RMS	34.60	0.00	-32.32	47.62	54	-6.38	-	-	226	156	V
	5670		5.725000	55.92	Pk	34.70	0.00	-31.75	58.87	-	-	68.2	-9.33	190	221	H
			5.725489	60.25	Pk	34.70	0.00	-31.74	63.21	-	-	68.2	-4.99	190	221	H
			5.725000	55.32	Pk	34.70	0.00	-31.75	58.27	-	-	68.2	-9.93	241	109	V
			5.786610	57.37	Pk	34.90	0.00	-31.72	60.55	-	-	68.2	-7.65	241	109	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

80MHz

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filtr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT80 SU Mode	5530	6+5	* 5.460000	52.91	Pk	34.90	0.00	-30.60	57.21	-	-	74	-16.79	318	115	H
			* 5.456838	57.36	Pk	34.90	0.00	-30.60	61.66	-	-	74	-12.34	318	115	H
			5.470000	52.77	Pk	34.90	0.00	-30.60	57.07	-	-	68.2	-11.13	318	115	H
			5.461738	58.94	Pk	34.90	0.00	-30.60	63.24	-	-	68.2	-4.96	318	115	H
			* 5.460000	40.83	RMS	34.90	0.00	-30.60	45.13	54	-8.87	-	-	318	115	H
			* 5.456313	42.03	RMS	34.90	0.00	-30.60	46.33	54	-7.67	-	-	318	115	H
			* 5.456313	42.03	RMS	34.90	0.00	-30.60	46.33	54	-7.67	-	-	318	115	H
			* 5.460000	50.39	Pk	34.90	0.00	-30.60	54.69	-	-	74	-19.31	47	167	V
			* 5.444711	53.59	Pk	34.90	0.00	-30.60	57.89	-	-	74	-16.11	47	167	V
			5.470000	50.36	Pk	34.90	0.00	-30.60	54.66	-	-	68.2	-13.54	47	167	V
			5.462413	52.48	Pk	34.90	0.00	-30.60	56.78	-	-	68.2	-11.42	47	167	V
			* 5.460000	39.72	RMS	34.90	0.00	-30.60	44.02	54	-9.98	-	-	47	167	V
			* 5.426934	40.84	RMS	35.00	0.00	-30.60	45.24	54	-8.76	-	-	47	167	V
			* 5.426934	40.84	RMS	35.00	0.00	-30.60	45.24	54	-8.76	-	-	47	167	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

160MHz

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filtr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT160 SU Mode	5570 (Lower)	6+5	* 5.460000	61.66	Pk	34.70	0.00	-37.06	59.30	-	-	74	-14.70	300	199	H
			* 5.459866	64.21	Pk	34.70	0.00	-37.06	61.85	-	-	74	-12.15	300	199	H
			5.470000	60.55	Pk	34.70	0.00	-37.00	58.25	-	-	68.2	-9.95	300	199	H
			5.465754	65.60	Pk	34.70	0.00	-36.99	63.31	-	-	68.2	-4.89	300	199	H
			* 5.460000	48.90	RMS	34.70	0.14	-37.06	46.68	54	-7.32	-	-	300	199	H
			* 5.445599	49.05	RMS	34.70	0.14	-37.06	46.83	54	-7.17	-	-	300	199	H
			* 5.445599	49.05	RMS	34.70	0.14	-37.06	46.83	54	-7.17	-	-	300	199	H
			* 5.460000	56.75	Pk	34.90	0.00	-37.06	54.59	-	-	74	-19.41	3	285	V
			* 5.457643	59.43	Pk	35.00	0.00	-37.04	57.39	-	-	74	-16.61	3	285	V
			5.470000	56.58	Pk	34.90	0.00	-37.00	54.48	-	-	68.2	-13.72	3	285	V
			5.469065	60.98	Pk	34.90	0.00	-36.98	58.90	-	-	68.2	-9.30	3	285	V
			* 5.460000	45.93	RMS	34.90	0.14	-37.06	43.91	54	-10.09	-	-	3	285	V
			* 5.381466	47.43	RMS	35.00	0.14	-37.07	45.50	54	-8.50	-	-	3	285	V
			* 5.381466	47.43	RMS	35.00	0.14	-37.07	45.50	54	-8.50	-	-	3	285	V
	5570 (Upper)		5.725000	54.59	Pk	34.60	0.00	-30.20	58.99	-	-	68.2	-9.21	316	110	H
			5.727355	58.95	Pk	34.60	0.00	-30.10	63.45	-	-	68.2	-4.75	316	110	H
			5.725000	49.93	Pk	34.60	0.00	-30.20	54.33	-	-	68.2	-13.87	20	103	V
			5.725920	54.82	Pk	34.50	0.00	-30.20	59.12	-	-	68.2	-9.08	20	103	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.24. 802.11be MIMO PARTIAL RU MODE IN UNII-2C BAND - BANDEDGE

20MHz

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filtr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 52+26T - RU70	5500	6+5	* 5.460000	56.74	Pk	34.60	0.00	-35.21	56.13	-	-	74	-17.87	325	223	H
			* 5.389444	58.99	Pk	34.50	0.00	-35.30	58.19	-	-	74	-15.81	325	223	H
			5.470000	60.96	Pk	34.60	0.00	-35.15	60.41	-	-	68.2	-7.79	325	223	H
			5.468510	62.21	Pk	34.60	0.00	-35.17	61.64	-	-	68.2	-6.56	325	223	H
			* 5.460000	45.47	RMS	34.60	0.00	-35.21	44.86	54	-9.14	-	-	325	223	H
			* 5.453177	46.68	RMS	34.60	0.00	-35.19	46.09	54	-7.91	-	-	325	223	H
			* 5.453177	46.68	RMS	34.60	0.00	-35.19	46.09	54	-7.91	-	-	325	223	H
			* 5.460000	56.11	Pk	34.60	0.00	-35.21	55.50	-	-	74	-18.50	23	104	V
			* 5.406644	58.70	Pk	34.50	0.00	-35.25	57.95	-	-	74	-16.05	23	104	V
			5.470000	57.02	Pk	34.60	0.00	-35.15	56.47	-	-	68.2	-11.73	23	104	V
			5.468088	59.44	Pk	34.60	0.00	-35.17	58.87	-	-	68.2	-9.33	23	104	V
			* 5.460000	45.72	RMS	34.60	0.00	-35.21	45.11	54	-8.89	-	-	23	104	V
			* 5.451710	46.24	RMS	34.60	0.00	-35.20	45.64	54	-8.36	-	-	23	104	V
			* 5.451710	46.24	RMS	34.60	0.00	-35.20	45.64	54	-8.36	-	-	23	104	V
EHT20 52+26T - RU72	5700	6+5	5.725000	62.87	Pk	35.10	0.00	-35.06	62.91	-	-	68.2	-5.29	6	323	H
			5.725152	63.26	Pk	35.10	0.00	-35.06	63.30	-	-	68.2	-4.90	6	323	H
			5.725000	60.71	Pk	35.10	0.00	-35.06	60.75	-	-	68.2	-7.45	47	202	V
			5.725067	61.39	Pk	35.10	0.00	-35.06	61.43	-	-	68.2	-6.77	47	202	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

80MHz

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filtr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT80 484+242T - RU93	5530	6+5	* 5.460000	61.34	Pk	34.70	0.00	-37.06	58.98	-	-	74	-15.02	79	156	H
			* 5.454710	62.87	Pk	34.70	0.00	-36.97	60.60	-	-	74	-13.40	79	156	H
			5.470000	62.97	Pk	34.70	0.00	-37.00	60.67	-	-	68.2	-7.53	79	156	H
			5.465777	65.01	Pk	34.70	0.00	-36.99	62.72	-	-	68.2	-5.48	79	156	H
			* 5.460000	47.10	RMS	34.70	0.00	-37.06	44.74	54	-9.26	-	-	79	156	H
			* 5.459910	47.71	RMS	34.70	0.00	-37.06	45.35	54	-8.65	-	-	79	156	H
			* 5.459910	47.71	RMS	34.70	0.00	-37.06	45.35	54	-8.65	-	-	79	156	H
			* 5.460000	57.38	Pk	34.70	0.00	-37.06	55.02	-	-	74	-18.98	252	289	V
			* 5.393666	59.71	Pk	34.80	0.00	-37.11	57.40	-	-	74	-16.60	252	289	V
			5.470000	56.33	Pk	34.70	0.00	-37.00	54.03	-	-	68.2	-14.17	252	289	V
			5.466577	58.12	Pk	34.70	0.00	-36.97	55.85	-	-	68.2	-12.35	252	289	V
			* 5.460000	45.87	RMS	34.70	0.00	-37.06	43.51	54	-10.49	-	-	252	289	V
			* 5.351067	47.47	RMS	34.70	0.00	-37.19	44.98	54	-9.02	-	-	252	289	V
			* 5.351067	47.47	RMS	34.70	0.00	-37.19	44.98	54	-9.02	-	-	252	289	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

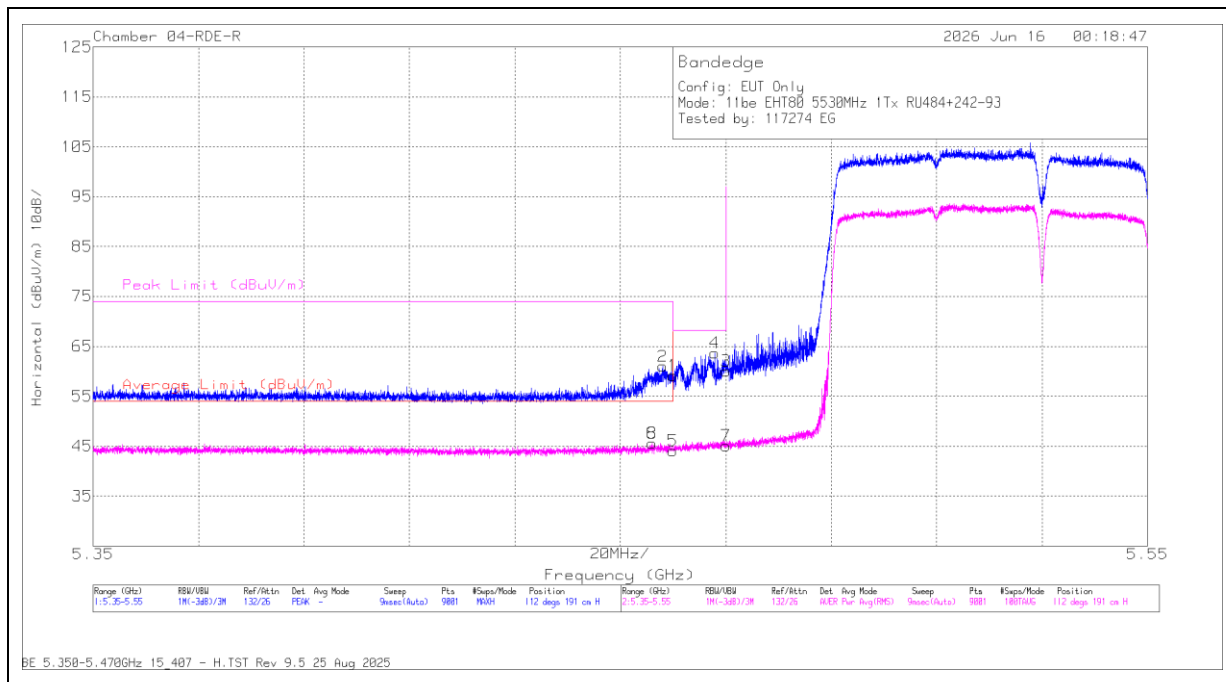
160MHz

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filtr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT160 996+484+ 242T - S99	5570 (Lower)	6+5	* 5.460000	64.03	Pk	34.70	0.00	-38.00	60.73	-	-	74	-13.27	264	195	H
			* 5.459777	66.75	Pk	34.70	0.00	-38.01	63.44	-	-	74	-10.56	264	195	H
			5.470000	65.54	Pk	34.70	0.00	-37.98	62.26	-	-	68.2	-5.94	264	195	H
			5.468932	66.21	Pk	34.70	0.00	-37.98	62.93	-	-	68.2	-5.27	264	195	H
			* 5.460000	49.01	RMS	34.70	0.00	-38.00	45.71	54	-8.29	-	-	264	195	H
			* 5.459532	50.21	RMS	34.70	0.00	-38.02	46.89	54	-7.11	-	-	264	195	H
			* 5.459532	50.21	RMS	34.70	0.00	-38.02	46.89	54	-7.11	-	-	264	195	H
			* 5.460000	59.16	Pk	34.70	0.00	-38.00	55.86	-	-	74	-18.14	346	198	V
			* 5.377866	60.22	Pk	34.80	0.00	-38.17	56.85	-	-	74	-17.15	346	198	V
			5.470000	57.32	Pk	34.70	0.00	-37.98	54.04	-	-	68.2	-14.16	346	198	V
			5.463066	59.66	Pk	34.70	0.00	-37.99	56.37	-	-	68.2	-11.83	346	198	V
			* 5.460000	46.19	RMS	34.70	0.00	-38.00	42.89	54	-11.11	-	-	346	198	V
			* 5.448643	48.04	RMS	34.70	0.00	-38.03	44.71	54	-9.29	-	-	346	198	V
			* 5.448643	48.04	RMS	34.70	0.00	-38.03	44.71	54	-9.29	-	-	346	198	V
EHT160 996+484+ 242T - RU96	5570 (Upper)	6+5	5.725000	53.99	Pk	34.60	0.00	-30.20	58.39	-	-	68.2	-9.81	353	106	H
			5.739086	58.40	Pk	34.60	0.00	-30.10	62.90	-	-	68.2	-5.30	353	106	H
			5.725000	51.92	Pk	34.60	0.00	-30.20	56.32	-	-	68.2	-11.88	17	109	V
			5.737365	58.34	Pk	34.60	0.00	-30.20	62.74	-	-	68.2	-5.46	17	109	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

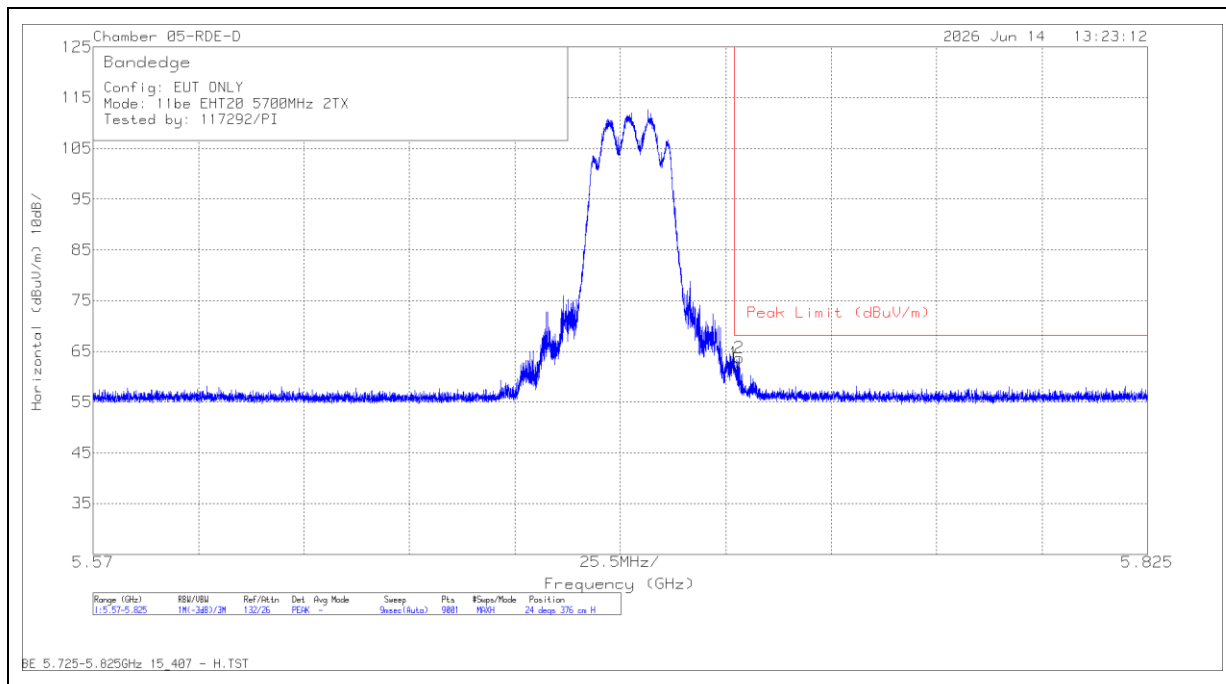
WORST-CASE BANDEDGE (LOW CHANNEL)**802.11be EHT80 / 5530 MHz / SISO 1TX ANT5 / 484+242T RU93****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/Filtr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.460000	61.48	Pk	34.70	0.00	-37.06	59.12	-	-	74	-14.88	112	191	H
2	* 5.458021	63.34	Pk	34.70	0.00	-37.05	60.99	-	-	74	-13.01	112	191	H
3	5.470000	62.34	Pk	34.70	0.00	-37.00	60.04	-	-	68.2	-8.16	112	191	H
4	5.467865	65.99	Pk	34.70	0.00	-36.99	63.70	-	-	68.2	-4.5	112	191	H
5	* 5.460000	46.43	RMS	34.70	0.00	-37.06	44.07	54	-9.93	-	-	112	191	H
6	* 5.455999	47.85	RMS	34.70	0.00	-36.99	45.56	54	-8.44	-	-	112	191	H
8	* 5.455999	47.85	RMS	34.70	0.00	-36.99	45.56	54	-8.44	-	-	112	191	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

WORST-CASE BANDEDGE (HIGH CHANNEL)**802.11be EHT20 / 5700 MHz / 2TX CDD / SU****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/Fltr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725000	62.65	Pk	35.10	0.00	-35.06	62.69	-	-	68.2	-5.51	24	376	H
2	5.726313	63.62	Pk	35.10	0.00	-35.05	63.67	-	-	68.2	-4.53	24	376	H

Pk - Peak detector

RMS - RMS detection

1.1.25. 802.11n/ac MIMO MODE IN UNII-2C BAND – SPURIOUS EMISSIONS

20MHz

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
HT20	5500	6+5	* 11.037753	41.93	ADR	37.60	0.00	-43.58	35.95	54	-18.05	-	-	0	101	V
			* 11.063090	53.35	PK-U	37.70	0.00	-43.26	47.79	-	-	74	-26.21	0	101	V
			* 11.064667	53.54	PK-U	37.70	0.00	-43.31	47.93	-	-	74	-26.07	0	101	H
			* 11.068200	41.72	ADR	37.70	0.00	-43.30	36.12	54	-17.88	-	-	0	101	H
			16.519059	50.12	PK-U	41.70	0.00	-40.85	50.97	-	-	68.2	-17.23	0	101	H
			16.52352	50.48	PK-U	41.70	0.00	-40.84	51.34	-	-	68.2	-16.86	0	101	V
			* 17.974232	47.36	PK-U	42.10	0.00	-35.62	53.84	-	-	74	-20.16	0	101	V
			* 17.974467	47.41	PK-U	42.10	0.00	-35.62	53.89	-	-	74	-20.11	0	101	H
			* 17.975569	35.54	ADR	42.10	0.00	-35.61	42.03	54	-11.97	-	-	0	101	H
			* 17.99834	35.45	ADR	42.10	0.00	-35.82	41.73	54	-12.27	-	-	0	101	V
	5580		* 11.148245	41.58	ADR	37.70	0.00	-43.40	35.88	54	-18.12	-	-	0	200	V
			* 11.151087	41.29	ADR	37.70	0.00	-43.41	35.58	54	-18.42	-	-	0	200	H
			* 11.156639	53.22	PK-U	37.70	0.00	-43.40	47.52	-	-	74	-26.48	0	200	H
			* 11.180494	53.08	PK-U	37.70	0.00	-42.98	47.80	-	-	74	-26.2	0	200	V
			16.726220	49.27	PK-U	42.10	0.00	-40.60	50.77	-	-	68.2	-17.43	0	200	H
			16.743057	49.15	PK-U	42.10	0.00	-40.45	50.80	-	-	68.2	-17.4	0	200	V
			* 17.924855	46.60	PK-U	42.10	0.00	-35.74	52.96	-	-	74	-21.04	0	200	V
			* 17.929633	35.08	ADR	42.10	0.00	-35.58	41.60	54	-12.4	-	-	0	200	V
			* 17.935487	46.76	PK-U	42.10	0.00	-35.38	53.48	-	-	74	-20.52	0	101	H
			* 17.938181	35.10	ADR	42.10	0.00	-35.38	41.82	54	-12.18	-	-	0	101	H
	5700		* 11.412993	52.75	PK-U	38.00	0.00	-42.53	48.22	-	-	74	-25.78	0	101	H
			* 11.421842	40.74	ADR	38.00	0.00	-42.72	36.02	54	-17.98	-	-	0	101	H
			* 11.427523	53.25	PK-U	38.00	0.00	-42.77	48.48	-	-	74	-25.52	0	101	V
			* 11.430981	40.97	ADR	38.00	0.00	-42.79	36.18	54	-17.82	-	-	0	101	V
			17.079805	48.83	PK-U	41.80	0.00	-39.94	50.69	-	-	68.2	-17.51	0	101	H
			17.092276	48.79	PK-U	41.80	0.00	-40.03	50.56	-	-	68.2	-17.64	0	200	V
			* 17.972544	35.39	ADR	42.10	0.00	-35.66	41.83	54	-12.17	-	-	0	101	V
			* 17.981768	35.33	ADR	42.10	0.00	-35.42	42.01	54	-11.99	-	-	0	101	H
			* 17.985163	46.86	PK-U	42.10	0.00	-35.33	53.63	-	-	74	-20.37	0	101	H
			* 17.988718	47.01	PK-U	42.10	0.00	-35.25	53.86	-	-	74	-20.14	0	101	V
	5720 (Straddle)		8.977182	55.59	PK-U	36.20	0.00	-44.35	47.44	-	-	68.2	-20.76	2	101	V
			8.978761	55.18	PK-U	36.20	0.00	-44.35	47.03	-	-	68.2	-21.17	2	101	H
			* 11.423097	40.82	ADR	38.00	0.00	-42.69	36.13	54	-17.87	-	-	2	101	H
			* 11.448177	40.80	ADR	38.00	0.00	-42.51	36.29	54	-17.71	-	-	2	101	V
			* 11.455115	52.42	PK-U	38.00	0.00	-42.48	47.94	-	-	74	-26.06	2	101	H
			* 11.462546	52.35	PK-U	38.10	0.00	-42.55	47.90	-	-	74	-26.1	2	101	V
			17.115800	48.47	PK-U	41.80	0.00	-40.06	50.21	-	-	68.2	-17.99	2	200	H
			17.120143	49.00	PK-U	41.80	0.00	-39.97	50.83	-	-	68.2	-17.37	2	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

40MHz

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
HT40	5510	6+5	3.027524	58.67	PK-U	32.90	0.00	-47.74	43.83	-	-	68.2	-24.37	157	213	V
			3.037469	58.76	PK-U	32.90	0.00	-47.66	44.00	-	-	68.2	-24.2	337	135	H
			* 12.066292	53.53	PK-U	38.90	0.00	-41.52	50.91	-	-	74	-23.09	47	398	H
			* 12.073595	41.04	ADR	38.90	0.00	-41.58	38.36	54	-15.64	-	-	47	398	H
			* 12.074143	40.32	ADR	38.90	0.00	-41.57	37.65	54	-16.35	-	-	60	333	V
			* 12.081281	52.35	PK-U	38.90	0.00	-41.60	49.65	-	-	74	-24.35	60	333	V
			17.644825	47.44	PK-U	42.00	0.00	-35.62	53.82	-	-	68.2	-14.38	207	396	V
			17.659910	47.21	PK-U	42.00	0.00	-36.07	53.14	-	-	68.2	-15.06	293	365	H
	5550		3.029219	59.08	PK-U	32.90	0.00	-47.68	44.30	-	-	68.2	-23.9	34	129	H
			3.047931	58.47	PK-U	32.90	0.00	-47.68	43.69	-	-	68.2	-24.51	18	257	V
			* 11.061316	54.12	PK-U	37.70	0.00	-43.25	48.57	-	-	74	-25.43	116	390	V
			* 11.074807	42.14	ADR	37.70	0.00	-43.31	36.53	54	-17.47	-	-	76	364	H
			* 11.085533	42.47	ADR	37.70	0.00	-43.40	36.77	54	-17.23	-	-	116	390	V
			* 11.086047	54.17	PK-U	37.70	0.00	-43.42	48.45	-	-	74	-25.55	76	364	H
			17.648326	46.88	PK-U	42.00	0.00	-35.49	53.39	-	-	68.2	-14.81	193	386	V
			17.654351	46.99	PK-U	42.00	0.00	-35.54	53.45	-	-	68.2	-14.75	255	372	H
	5670		2.951984	59.06	PK-U	32.70	0.00	-48.57	43.19	-	-	68.2	-25.01	295	342	H
			2.953890	59.19	PK-U	32.70	0.00	-48.59	43.30	-	-	68.2	-24.9	87	157	V
			8.639916	54.10	PK-U	36.10	0.00	-44.07	46.13	-	-	68.2	-22.07	306	380	V
			8.647919	54.00	PK-U	36.10	0.00	-43.47	46.63	-	-	68.2	-21.57	42	378	H
			17.646213	47.11	PK-U	42.00	0.00	-35.59	53.52	-	-	68.2	-14.68	87	381	H
			17.656133	47.18	PK-U	42.00	0.00	-35.76	53.42	-	-	68.2	-14.78	25	375	V
			* 3.805364	43.73	ADR	33.20	0.00	-45.08	31.85	54	-22.15	-	-	0	101	V
			* 3.830177	55.65	PK-U	33.40	0.00	-45.21	43.84	-	-	74	-30.16	0	101	V
	5710 (Straddle)		* 3.839751	55.13	PK-U	33.40	0.00	-45.09	43.44	-	-	74	-30.56	0	199	H
			* 3.843305	43.72	ADR	33.40	0.00	-45.14	31.98	54	-22.02	-	-	0	199	H
			10.006458	54.47	PK-U	37.10	0.00	-43.25	48.32	-	-	68.2	-19.88	0	101	H
			10.009213	54.73	PK-U	37.10	0.00	-43.14	48.69	-	-	68.2	-19.51	0	101	V
			16.867576	54.13	PK-U	42.00	0.00	-40.72	55.41	-	-	68.2	-12.79	0	200	H
			16.898415	53.72	PK-U	42.00	0.00	-40.34	55.38	-	-	68.2	-12.82	0	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

80MHz

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
VHT80	5530	6+5	3.051441	58.34	PK-U	32.90	0.00	-47.73	43.51	-	-	68.2	-24.69	105	183	V
			3.053537	58.18	PK-U	32.90	0.00	-47.75	43.33	-	-	68.2	-24.87	172	103	H
			* 10.629860	55.10	PK-U	37.70	0.00	-44.51	48.29	-	-	74	-25.71	112	389	H
			* 10.654606	43.53	ADR	37.70	0.00	-44.24	36.99	54	-17.01	-	-	112	389	H
			* 10.659041	43.51	ADR	37.70	0.00	-44.30	36.91	54	-17.09	-	-	155	375	V
			* 10.669192	55.07	PK-U	37.70	0.00	-44.17	48.60	-	-	74	-25.4	155	375	V
			17.638958	46.51	PK-U	42.00	0.00	-35.66	52.85	-	-	68.2	-15.35	344	352	H
			17.661363	46.72	PK-U	42.00	0.00	-36.25	52.47	-	-	68.2	-15.73	323	389	V
	5610		2.940281	59.08	PK-U	32.60	0.00	-48.73	42.95	-	-	68.2	-25.25	0	101	V
			2.949955	58.74	PK-U	32.70	0.00	-48.56	42.88	-	-	68.2	-25.32	0	101	H
			* 12.656008	51.93	PK-U	39.10	0.00	-41.80	49.23	-	-	74	-24.77	0	200	V
			* 12.668048	39.76	ADR	39.10	0.00	-41.57	37.29	54	-16.71	-	-	0	200	V
			* 12.691067	39.81	ADR	39.10	0.00	-41.18	37.73	54	-16.27	-	-	0	101	H
			12.700743	51.40	PK-U	39.10	0.00	-41.56	48.94	-	-	68.2	-19.26	0	101	H
			17.654416	45.53	PK-U	42.00	0.00	-35.55	51.98	-	-	68.2	-16.22	0	200	H
			17.666614	45.90	PK-U	42.00	0.00	-36.84	51.06	-	-	68.2	-17.14	0	101	V
	5690 (Straddle)		8.981762	54.97	PK-U	36.20	0.00	-44.37	46.80	-	-	68.2	-21.4	0	101	V
			8.999258	54.93	PK-U	36.20	0.00	-44.51	46.62	-	-	68.2	-21.58	0	200	H
			* 9.000307	42.83	ADR	36.20	0.00	-44.49	34.54	54	-19.46	-	-	0	200	H
			* 9.001194	43.21	ADR	36.20	0.00	-44.47	34.94	54	-19.06	-	-	0	101	V
			* 11.340097	40.34	ADR	37.90	0.00	-43.09	35.15	54	-18.85	-	-	0	200	V
			* 11.362262	52.10	PK-U	37.90	0.00	-43.08	46.92	-	-	74	-27.08	0	101	H
			* 11.365515	40.26	ADR	38.00	0.00	-43.11	35.15	54	-18.85	-	-	0	101	H
			* 11.370968	52.39	PK-U	38.00	0.00	-43.06	47.33	-	-	74	-26.67	0	200	V
			17.101876	49.14	PK-U	41.80	0.00	-40.00	50.94	-	-	68.2	-17.26	0	101	H
			17.114445	48.22	PK-U	41.80	0.00	-40.10	49.92	-	-	68.2	-18.28	0	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

160MHz

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
VHT160	5570	6+5	8.979740	54.54	PK-U	36.20	0.00	-44.34	46.40	-	-	68.2	-21.8	0	200	V
			* 9.000653	55.29	PK-U	36.20	0.00	-44.48	47.01	-	-	74	-26.99	0	101	H
			* 11.108341	52.61	PK-U	37.70	0.00	-43.23	47.08	-	-	74	-26.92	0	200	H
			* 11.113217	41.10	ADR	37.70	0.00	-43.16	35.64	54	-18.36	-	-	0	200	H
			* 11.143208	53.03	PK-U	37.70	0.00	-43.32	47.41	-	-	74	-26.59	0	200	V
			* 11.145662	41.24	ADR	37.70	0.00	-43.33	35.61	54	-18.39	-	-	0	200	V
			16.713749	49.92	PK-U	42.00	0.00	-40.63	51.29	-	-	68.2	-16.91	0	200	H
			16.714082	49.48	PK-U	42.00	0.00	-40.65	50.83	-	-	68.2	-17.37	0	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.1.26. 802.11be SU MIMO MODE IN UNII-2C BAND – SPURIOUS EMISSIONS

20MHz

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 SU Mode	5500	6+5	* 2.743110	45.42	ADR	32.40	0.00	-46.52	31.30	54	-22.7	-	-	360	101	H
			* 2.745710	56.93	PK-U	32.40	0.00	-46.51	42.82	-	-	74	-31.18	360	200	V
			* 2.747130	57.14	PK-U	32.40	0.00	-46.49	43.05	-	-	74	-30.95	360	101	H
			* 2.748817	45.44	ADR	32.40	0.00	-46.51	31.33	54	-22.67	-	-	360	200	V
			* 11.001565	43.55	ADR	37.70	0.00	-43.29	37.96	54	-16.04	-	-	360	101	V
			* 11.005671	43.53	ADR	37.70	0.00	-43.29	37.94	54	-16.06	-	-	360	101	H
			* 11.031476	55.46	PK-U	37.70	0.00	-43.09	50.07	-	-	74	-23.93	360	101	V
			* 11.038213	55.36	PK-U	37.70	0.00	-42.99	50.07	-	-	74	-23.93	360	101	H
			16.471124	54.39	PK-U	41.40	0.00	-41.27	54.52	-	-	68.2	-13.68	360	200	H
			16.507260	54.74	PK-U	41.50	0.00	-41.34	54.90	-	-	68.2	-13.3	360	200	V
	5580		* 2.804627	45.59	ADR	32.10	0.00	-46.39	31.30	54	-22.7	-	-	360	101	V
			* 2.809226	45.49	ADR	32.10	0.00	-46.41	31.18	54	-22.82	-	-	360	101	H
			* 2.809626	56.82	PK-U	32.10	0.00	-46.42	42.50	-	-	74	-31.5	360	101	H
			* 2.811473	57.03	PK-U	32.10	0.00	-46.44	42.69	-	-	74	-31.31	360	101	V
			* 11.141642	43.29	ADR	37.80	0.00	-42.99	38.10	54	-15.9	-	-	360	200	V
			* 11.158318	54.69	PK-U	37.80	0.00	-43.06	49.43	-	-	74	-24.57	360	200	V
			* 11.169959	43.26	ADR	37.80	0.00	-43.12	37.94	54	-16.06	-	-	360	101	H
			* 11.170803	54.96	PK-U	37.80	0.00	-43.14	49.62	-	-	74	-24.38	360	101	H
			16.752939	54.71	PK-U	42.00	0.00	-40.30	56.41	-	-	68.2	-11.79	360	101	V
			16.790447	55.01	PK-U	42.00	0.00	-40.86	56.15	-	-	68.2	-12.05	360	101	H
	5700		8.997397	54.64	PK-U	36.20	0.00	-44.54	46.30	-	-	68.2	-21.9	360	101	H
			8.999308	54.72	PK-U	36.20	0.00	-44.51	46.41	-	-	68.2	-21.79	360	101	V
			* 9.026584	42.89	ADR	36.20	0.00	-44.45	34.64	54	-19.36	-	-	360	101	H
			* 11.379909	40.46	ADR	38.00	0.00	-42.87	35.59	54	-18.41	-	-	360	101	V
			* 11.382287	40.40	ADR	38.00	0.00	-42.81	35.59	54	-18.41	-	-	360	199	H
			* 11.395873	52.44	PK-U	38.00	0.00	-42.58	47.86	-	-	74	-26.14	360	101	V
			* 11.405736	52.17	PK-U	38.00	0.00	-42.54	47.63	-	-	74	-26.37	360	199	H
			17.089548	48.20	PK-U	41.80	0.00	-40.01	49.99	-	-	68.2	-18.21	360	200	V
			17.105168	48.63	PK-U	41.80	0.00	-40.04	50.39	-	-	68.2	-17.81	360	101	H
			* 11.95429	57.39	PK-U	38.80	0.00	-44.50	51.69	-	-	74	-22.31	360	199	H
	5720 (Straddle)		* 11.963676	45.65	ADR	38.80	0.00	-44.90	39.55	54	-14.45	-	-	360	101	V
			* 11.96476	57.60	PK-U	38.80	0.00	-44.82	51.58	-	-	74	-22.42	360	101	V
			* 11.978547	45.40	ADR	38.80	0.00	-45.00	39.20	54	-14.8	-	-	360	199	H
			* 3.767401	46.92	ADR	33.40	0.00	-47.80	32.52	54	-21.48	-	-	360	101	V
			* 3.770308	58.77	PK-U	33.40	0.00	-47.77	44.40	-	-	74	-29.6	360	101	V
			* 3.772955	47.01	ADR	33.40	0.00	-47.70	32.71	54	-21.29	-	-	360	101	H
			* 3.793021	58.84	PK-U	33.40	0.00	-47.60	44.64	-	-	74	-29.36	360	101	H
			* 8.293009	46.44	ADR	35.80	0.00	-46.20	36.04	54	-17.96	-	-	360	101	V
			* 8.2952	58.50	PK-U	35.80	0.00	-46.20	48.10	-	-	74	-25.9	360	199	H
			* 8.308863	57.89	PK-U	35.80	0.00	-46.11	47.58	-	-	74	-26.42	360	101	V
			* 8.327387	46.32	ADR	35.80	0.00	-46.06	36.06	54	-17.94	-	-	360	199	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

40MHz

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT40 SU Mode	5510	6+5	8.993511	54.61	PK-U	36.20	0.00	-44.54	46.27	-	-	68.2	-21.93	360	101	H
			* 9.026347	42.84	ADR	36.20	0.00	-44.46	34.58	54	-19.42	-	-	360	101	H
			* 9.034580	54.35	PK-U	36.20	0.00	-44.28	46.27	-	-	74	-27.73	360	200	V
			* 11.016150	53.13	PK-U	37.60	0.00	-43.63	47.10	-	-	74	-26.9	360	101	H
			* 11.030354	41.50	ADR	37.60	0.00	-43.66	35.44	54	-18.56	-	-	360	101	H
			* 11.031791	53.01	PK-U	37.60	0.00	-43.63	46.98	-	-	74	-27.02	360	101	V
			* 11.033284	41.18	ADR	37.60	0.00	-43.69	35.09	54	-18.91	-	-	360	101	V
			16.555713	49.17	PK-U	41.80	0.00	-40.90	50.07	-	-	68.2	-18.13	360	200	V
			16.563822	49.68	PK-U	41.80	0.00	-40.71	50.77	-	-	68.2	-17.43	360	101	H
			* 9.000743	42.91	ADR	36.20	0.00	-44.48	34.63	54	-19.37	-	-	360	101	H
	5550		* 9.002054	54.89	PK-U	36.20	0.00	-44.46	46.63	-	-	74	-27.37	360	101	H
			* 9.028552	54.50	PK-U	36.20	0.00	-44.43	46.27	-	-	74	-27.73	360	199	V
			* 9.034299	42.75	ADR	36.20	0.00	-44.28	34.67	54	-19.33	-	-	360	199	V
			* 11.068507	52.52	PK-U	37.70	0.00	-43.32	46.90	-	-	74	-27.1	360	199	H
			* 11.093388	41.38	ADR	37.70	0.00	-43.52	35.56	54	-18.44	-	-	360	199	V
			* 11.096707	41.69	ADR	37.70	0.00	-43.52	35.87	54	-18.13	-	-	360	199	H
			* 11.100375	53.34	PK-U	37.70	0.00	-43.47	47.57	-	-	74	-26.43	360	199	V
			16.610566	48.93	PK-U	41.90	0.00	-40.87	49.96	-	-	68.2	-18.24	360	199	V
			16.634931	48.50	PK-U	42.00	0.00	-40.50	50.00	-	-	68.2	-18.2	360	101	H
			* 9.001701	42.80	ADR	36.20	0.00	-44.46	34.54	54	-19.46	-	-	360	101	V
	5670		* 9.001853	42.94	ADR	36.20	0.00	-44.46	34.68	54	-19.32	-	-	360	101	H
			* 9.004462	54.73	PK-U	36.20	0.00	-44.42	46.51	-	-	74	-27.49	360	101	H
			* 9.015496	54.73	PK-U	36.20	0.00	-44.49	46.44	-	-	74	-27.56	360	101	V
			* 11.325520	40.53	ADR	37.90	0.00	-43.11	35.32	54	-18.68	-	-	360	101	H
			* 11.329208	52.52	PK-U	37.90	0.00	-43.07	47.35	-	-	74	-26.65	360	101	V
			* 11.333906	40.43	ADR	37.90	0.00	-43.07	35.26	54	-18.74	-	-	360	101	V
			* 11.357547	52.86	PK-U	37.90	0.00	-43.05	47.71	-	-	74	-26.29	360	101	H
			16.996612	48.44	PK-U	42.00	0.00	-40.16	50.28	-	-	68.2	-17.92	360	200	V
			17.000877	48.47	PK-U	42.00	0.00	-40.16	50.31	-	-	68.2	-17.89	360	200	H
			8.979703	54.77	PK-U	36.20	0.00	-44.34	46.63	-	-	68.2	-21.57	360	101	H
	5710 (Straddle)		8.998568	54.69	PK-U	36.20	0.00	-44.52	46.37	-	-	68.2	-21.83	360	101	V
			* 9.002062	42.88	ADR	36.20	0.00	-44.46	34.62	54	-19.38	-	-	360	101	V
			* 11.403107	40.17	ADR	38.00	0.00	-42.54	35.63	54	-18.37	-	-	360	200	H
			* 11.405671	51.74	PK-U	38.00	0.00	-42.54	47.20	-	-	74	-26.8	360	200	H
			* 11.406946	52.01	PK-U	38.00	0.00	-42.52	47.49	-	-	74	-26.51	360	101	V
			* 11.425013	40.32	ADR	38.00	0.00	-42.71	35.61	54	-18.39	-	-	360	101	V
			17.115713	48.19	PK-U	41.80	0.00	-40.07	49.92	-	-	68.2	-18.28	360	200	V
			17.143225	48.13	PK-U	41.70	0.00	-39.65	50.18	-	-	68.2	-18.02	360	200	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

80MHz

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT80 SU Mode	5530	6+5	8.998681	55.11	PK-U	36.20	0.00	-44.52	46.79	-	-	68.2	-21.41	360	101	V
			* 9.000694	42.93	ADR	36.20	0.00	-44.48	34.65	54	-19.35	-	-	360	101	V
			* 9.005218	54.70	PK-U	36.20	0.00	-44.39	46.51	-	-	74	-27.49	360	101	H
			* 11.038384	41.40	ADR	37.60	0.00	-43.57	35.43	54	-18.57	-	-	360	101	H
			* 11.039193	41.28	ADR	37.60	0.00	-43.56	35.32	54	-18.68	-	-	360	200	V
			* 11.041691	52.83	PK-U	37.60	0.00	-43.52	46.91	-	-	74	-27.09	360	200	V
			* 11.053171	53.66	PK-U	37.60	0.00	-43.19	48.07	-	-	74	-25.93	360	101	H
			16.586737	49.12	PK-U	41.80	0.00	-40.52	50.40	-	-	68.2	-17.8	360	200	V
	5610		16.600408	49.29	PK-U	41.90	0.00	-40.74	50.45	-	-	68.2	-17.75	360	199	H
			8.993130	54.39	PK-U	36.20	0.00	-44.55	46.04	-	-	68.2	-22.16	360	200	V
			8.997799	55.25	PK-U	36.20	0.00	-44.53	46.92	-	-	68.2	-21.28	360	101	H
			* 11.233578	52.79	PK-U	37.80	0.00	-43.03	47.56	-	-	74	-26.44	360	200	V
			* 11.235139	40.79	ADR	37.80	0.00	-43.06	35.53	54	-18.47	-	-	360	200	H
			* 11.237947	40.84	ADR	37.80	0.00	-43.09	35.55	54	-18.45	-	-	360	200	V
			* 11.241339	52.49	PK-U	37.80	0.00	-43.12	47.17	-	-	74	-26.83	360	200	H
			16.834020	49.08	PK-U	42.10	0.00	-40.14	51.04	-	-	68.2	-17.16	360	200	V
	5690 (Straddle)		16.843504	48.83	PK-U	42.10	0.00	-40.08	50.85	-	-	68.2	-17.35	360	200	H
			* 9.001938	54.94	PK-U	36.20	0.00	-44.46	46.68	-	-	74	-27.32	360	101	H
			* 9.005014	42.88	ADR	36.20	0.00	-44.39	34.69	54	-19.31	-	-	360	101	H
			* 9.032649	54.85	PK-U	36.20	0.00	-44.31	46.74	-	-	74	-27.26	360	101	V
			* 9.033009	43.04	ADR	36.20	0.00	-44.30	34.94	54	-19.06	-	-	360	101	V
			* 11.366434	51.93	PK-U	38.00	0.00	-43.12	46.81	-	-	74	-27.19	360	101	V
			* 11.373754	40.39	ADR	38.00	0.00	-42.99	35.40	54	-18.6	-	-	360	101	V
			* 11.373891	53.42	PK-U	38.00	0.00	-42.98	48.44	-	-	74	-25.56	360	101	H
			* 11.397491	40.38	ADR	38.00	0.00	-42.51	35.87	54	-18.13	-	-	360	101	H
			17.057312	49.03	PK-U	41.90	0.00	-40.18	50.75	-	-	68.2	-17.45	360	200	H
			17.058367	48.53	PK-U	41.90	0.00	-40.19	50.24	-	-	68.2	-17.96	360	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

160MHz

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT160 SU Mode	5570	6+5	* 15.613926	53.77	PK-U	40.10	0.00	-39.74	54.13	-	-	74	-19.87	360	200	V
			* 15.621366	40.80	ADR	40.10	0.00	-39.81	41.09	54	-12.91	-	-	360	100	H
			* 15.6277	52.96	PK-U	40.10	0.00	-39.91	53.15	-	-	74	-20.85	360	100	H
			* 15.629215	40.83	ADR	40.10	0.00	-39.94	40.99	54	-13.01	-	-	360	200	V
			* 2.2487	57.99	PK-U	31.90	0.00	-46.68	43.21	-	-	74	-30.79	360	100	H
			* 2.25418	45.83	ADR	31.90	0.00	-46.65	31.08	54	-22.92	-	-	360	100	H
			* 2.258646	45.81	ADR	31.90	0.00	-46.76	30.95	54	-23.05	-	-	360	201	V
			* 2.27576	57.72	PK-U	31.90	0.00	-46.87	42.75	-	-	74	-31.25	360	201	V
			* 7.504643	41.62	ADR	35.60	0.00	-42.10	35.12	54	-18.88	-	-	360	100	H
			* 7.505179	53.15	PK-U	35.60	0.00	-42.08	46.67	-	-	74	-27.33	360	201	V
			* 7.508677	41.55	ADR	35.60	0.00	-41.98	35.17	54	-18.83	-	-	360	201	V
			* 7.514141	53.40	PK-U	35.60	0.00	-41.94	47.06	-	-	74	-26.94	360	100	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.1.27. 802.11be MIMO PARTIAL RU MODE IN UNII-2C BAND – SPURIOUS EMISSIONS

20MHz

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 52+26T - RU70	5500	6+5	* 3.8477710	45.38	ADR	33.40	0.00	-47.35	31.43	54	-22.57	-	-	360	200	H
			* 3.847790	45.36	ADR	33.40	0.00	-47.34	31.42	54	-22.58	-	-	360	101	V
			* 3.865103	57.88	PK-U	33.40	0.00	-47.20	44.08	-	-	74	-29.92	360	200	H
			* 3.865464	57.03	PK-U	33.40	0.00	-47.21	43.22	-	-	74	-30.78	360	101	V
			16.761721	48.77	PK-U	42.10	0.00	-40.53	50.34	-	-	68.2	-17.86	360	101	H
			16.771899	48.60	PK-U	42.10	0.00	-40.47	50.23	-	-	68.2	-17.97	360	101	V
			9.768948	55.25	PK-U	37.00	0.00	-45.53	46.72	-	-	68.2	-21.48	360	200	V
			9.776336	55.41	PK-U	37.00	0.00	-45.50	46.91	-	-	68.2	-21.29	360	101	H
EHT20 52+26T - RU71	5580	6+5	* 3.925558	56.70	PK-U	33.50	0.00	-46.98	43.22	-	-	74	-30.78	360	101	H
			* 3.948978	44.93	ADR	33.50	0.00	-47.07	31.36	54	-22.64	-	-	360	200	V
			* 3.950805	56.49	PK-U	33.50	0.00	-47.13	42.86	-	-	74	-31.14	360	200	V
			* 3.952998	44.74	ADR	33.50	0.00	-47.16	31.08	54	-22.92	-	-	360	101	H
			16.700651	49.38	PK-U	42.00	0.00	-40.53	50.85	-	-	68.2	-17.35	360	101	H
			16.705319	49.35	PK-U	42.00	0.00	-40.60	50.75	-	-	68.2	-17.45	360	101	V
			9.873804	56.06	PK-U	37.10	0.00	-45.16	48.00	-	-	68.2	-20.2	360	101	H
			9.875021	55.95	PK-U	37.10	0.00	-45.14	47.91	-	-	68.2	-20.29	360	101	V
EHT20 52+26T - RU72	5700	6+5	* 4.008886	57.38	PK-U	33.40	0.00	-47.19	43.59	-	-	74	-30.41	0	101	V
			* 4.014693	45.31	ADR	33.40	0.00	-47.26	31.45	54	-22.55	-	-	0	101	V
			* 4.019619	57.25	PK-U	33.40	0.00	-47.25	43.40	-	-	74	-30.6	0	199	H
			* 4.020959	45.26	ADR	33.40	0.00	-47.26	31.40	54	-22.6	-	-	0	199	H
			16.848318	48.86	PK-U	42.10	0.00	-39.86	51.10	-	-	68.2	-17.1	0	101	H
			16.869931	48.36	PK-U	42.00	0.00	-39.91	50.45	-	-	68.2	-17.75	0	200	V
			9.875341	55.84	PK-U	37.10	0.00	-45.15	47.79	-	-	68.2	-20.41	0	101	V
			9.882560	56.02	PK-U	37.10	0.00	-45.45	47.67	-	-	68.2	-20.53	0	101	H
	5720 (Straddle)		* 3.910556	44.82	ADR	33.40	0.00	-46.84	31.38	54	-22.62	-	-	0	101	V
			* 3.912057	44.70	ADR	33.40	0.00	-46.83	31.27	54	-22.73	-	-	0	101	H
			* 3.913223	57.06	PK-U	33.40	0.00	-46.82	43.64	-	-	74	-30.36	0	101	V
			* 3.931270	56.37	PK-U	33.50	0.00	-46.89	42.98	-	-	74	-31.02	0	101	H
			16.793108	48.46	PK-U	42.10	0.00	-40.30	50.26	-	-	68.2	-17.94	0	101	V
			16.815759	48.28	PK-U	42.10	0.00	-40.41	49.97	-	-	68.2	-18.23	0	101	H
	9.745952	55.16	PK-U	37.00	0.00	-45.46	46.70	-	-	68.2	-21.5	0	101	V		
	9.756519	54.93	PK-U	37.00	0.00	-45.20	46.73	-	-	68.2	-21.47	0	199	H		

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

80MHz

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filtr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT80 484+242T - RU91	5530	6+5	* 4.003671	57.59	PK-U	33.40	0.00	-47.41	43.58	-	-	74	-30.42	360	101	H
			* 3.975718	45.90	ADR	33.30	0.00	-47.57	31.63	54	-22.37	-	-	360	101	H
			* 3.975445	57.90	PK-U	33.30	0.00	-47.59	43.61	-	-	74	-30.39	360	101	V
			* 3.974931	45.84	ADR	33.30	0.00	-47.61	31.53	54	-22.47	-	-	360	101	V
			* 11.295189	55.94	PK-U	37.80	0.00	-44.85	48.89	-	-	74	-25.11	360	101	H
			* 11.319833	43.89	ADR	37.80	0.00	-44.86	36.83	54	-17.17	-	-	360	101	H
			* 15.636092	53.63	PK-U	41.20	0.00	-41.91	52.92	-	-	74	-21.08	360	101	H
			* 15.648950	41.72	ADR	41.10	0.00	-41.78	41.04	54	-12.96	-	-	360	101	H
			* 11.315248	55.83	PK-U	37.80	0.00	-44.82	48.81	-	-	74	-25.19	360	101	V
			* 11.304879	43.86	ADR	37.80	0.00	-44.78	36.88	54	-17.12	-	-	360	101	V
			* 15.644231	53.82	PK-U	41.10	0.00	-41.86	53.06	-	-	74	-20.94	360	101	V
			* 15.647097	41.79	ADR	41.10	0.00	-41.76	41.13	54	-12.87	-	-	360	101	V
			* 4.018073	57.33	PK-U	33.50	0.00	-47.41	43.42	-	-	74	-30.58	360	101	H
			* 4.022153	45.83	ADR	33.50	0.00	-47.43	31.90	54	-22.1	-	-	360	101	H
			* 4.016891	57.19	PK-U	33.50	0.00	-47.36	43.33	-	-	74	-30.67	360	101	V
EHT80 484+242T - RU92	5690 (Straddle)	6+5	* 4.019988	45.77	ADR	33.50	0.00	-47.46	31.81	54	-22.19	-	-	360	101	V
			* 11.475879	55.39	PK-U	38.10	0.00	-44.37	49.12	-	-	74	-24.88	360	101	H
			* 11.476128	43.43	ADR	38.10	0.00	-44.38	37.15	54	-16.85	-	-	360	101	H
			* 15.815576	54.57	PK-U	41.10	0.00	-42.01	53.66	-	-	74	-20.34	360	101	H
			* 15.812273	42.35	ADR	41.10	0.00	-42.01	41.44	54	-12.56	-	-	360	101	H
			* 11.454397	55.16	PK-U	38.10	0.00	-44.54	48.72	-	-	74	-25.28	360	101	V
			* 11.476171	43.93	ADR	38.10	0.00	-44.37	37.66	54	-16.34	-	-	360	101	V
			* 15.812775	54.58	PK-U	41.10	0.00	-42.02	53.66	-	-	74	-20.34	360	101	V
			* 15.799082	42.60	ADR	41.10	0.00	-42.17	41.53	54	-12.47	-	-	360	101	V
			* 3.928277	57.68	PK-U	33.40	0.00	-47.81	43.27	-	-	74	-30.73	360	101	H
			* 3.923850	46.13	ADR	33.40	0.00	-47.78	31.75	54	-22.25	-	-	360	101	H
			* 3.919819	58.32	PK-U	33.40	0.00	-47.82	43.90	-	-	74	-30.1	360	101	V
			* 3.921839	46.43	ADR	33.40	0.00	-47.79	32.04	54	-21.96	-	-	360	101	V
			* 11.081405	56.31	PK-U	37.60	0.00	-44.98	48.93	-	-	74	-25.07	360	101	H
			* 11.086841	44.41	ADR	37.60	0.00	-44.97	37.04	54	-16.96	-	-	360	101	H
EHT80 484+242T - RU93	5610	6+5	* 15.609278	53.25	PK-U	41.20	0.00	-41.61	52.84	-	-	74	-21.16	360	101	H
			* 15.591007	41.60	ADR	41.10	0.00	-41.52	41.18	54	-12.82	-	-	360	101	H
			* 11.082045	55.96	PK-U	37.60	0.00	-44.99	48.57	-	-	74	-25.43	360	101	V
			* 11.085031	44.55	ADR	37.60	0.00	-45.00	37.15	54	-16.85	-	-	360	101	V
			* 15.598224	53.67	PK-U	41.10	0.00	-41.48	53.29	-	-	74	-20.71	360	101	V
			* 15.595335	41.70	ADR	41.10	0.00	-41.43	41.37	54	-12.63	-	-	360	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

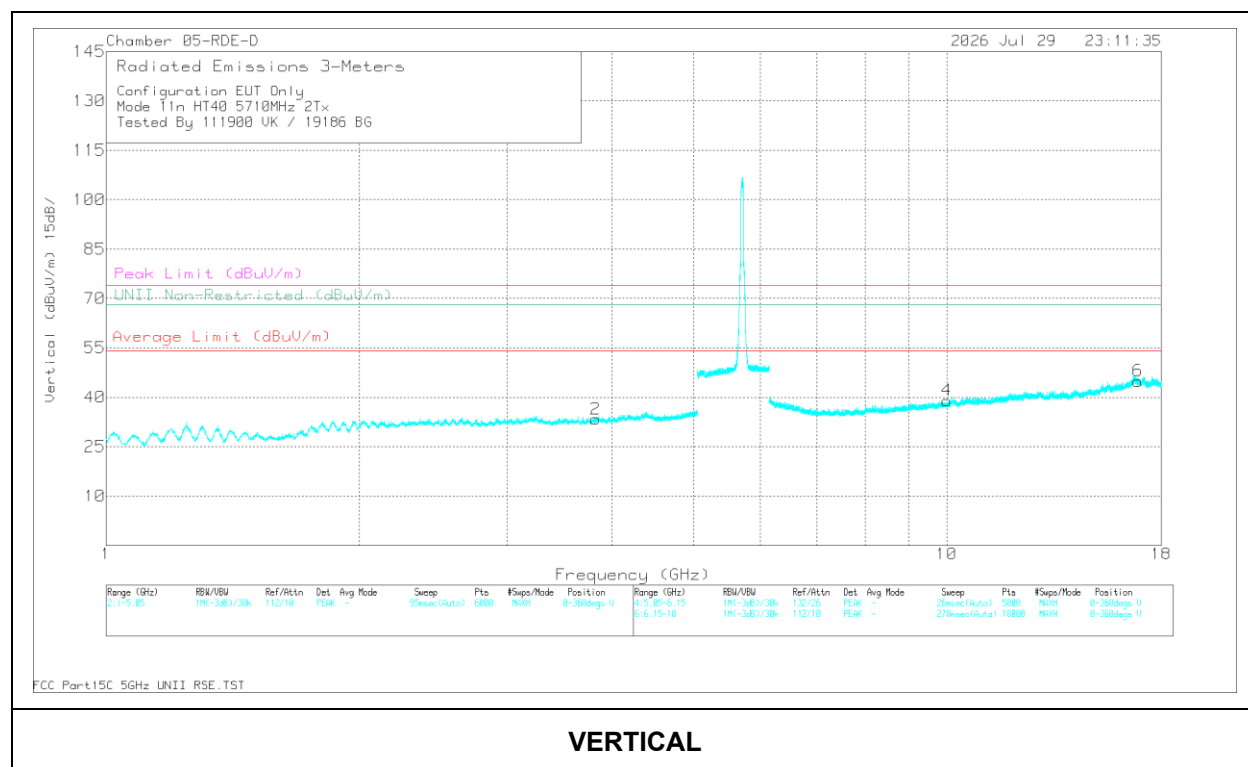
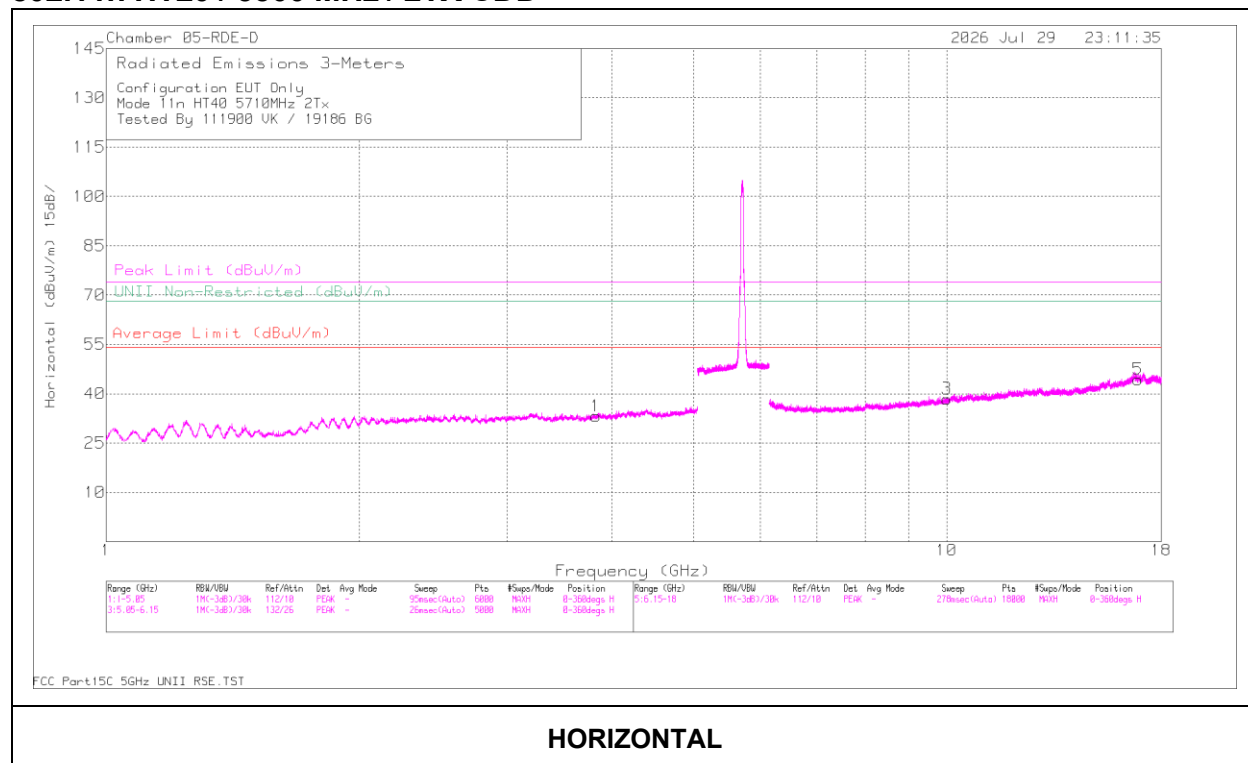
160MHz

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filtr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT160 996+484+ 242T - RU98	5570	6+5	* 3.934445	58.07	PK-U	33.40	0.00	-47.74	43.73	-	-	74	-30.27	360	101	H
			* 3.926952	45.95	ADR	33.40	0.00	-47.82	31.53	54	-22.47	-	-	360	101	H
			* 3.949916	57.71	PK-U	33.40	0.00	-47.61	43.50	-	-	74	-30.5	360	101	V
			* 3.924923	46.03	ADR	33.40	0.00	-47.78	31.65	54	-22.35	-	-	360	101	V
			* 11.513221	55.34	PK-U	38.20	0.00	-44.15	49.39	-	-	74	-24.61	360	101	H
			* 11.516541	43.75	ADR	38.20	0.00	-44.09	37.86	54	-16.14	-	-	360	101	H
			* 15.770014	53.74	PK-U	41.20	0.00	-42.13	52.81	-	-	74	-21.19	360	101	H
			* 15.786347	42.02	ADR	41.20	0.00	-42.21	41.01	54	-12.99	-	-	360	101	H
			* 11.500901	55.28	PK-U	38.20	0.00	-44.46	49.02	-	-	74	-24.98	360	101	V
			* 11.517474	43.79	ADR	38.20	0.00	-44.06	37.93	54	-16.07	-	-	360	101	V
			* 15.770000	53.93	PK-U	41.20	0.00	-42.13	53.00	-	-	74	-21	360	101	V
			* 15.773236	42.23	ADR	41.20	0.00	-42.18	41.25	54	-12.75	-	-	360	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

WORST-CASE HARMONICS AND SPURIOUS EMISSIONS**802.11n HT20 / 5500 MHz / 2TX CDD**

Radiated Emissions

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filt/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 11.037753	41.93	ADR	37.60	0.00	-43.58	35.95	54	-18.05	-	-	0	101	V
2	* 11.063090	53.35	PK-U	37.70	0.00	-43.26	47.79	-	-	74	-26.21	0	101	V
1	* 11.064667	53.54	PK-U	37.70	0.00	-43.31	47.93	-	-	74	-26.07	0	101	H
1	* 11.068200	41.72	ADR	37.70	0.00	-43.30	36.12	54	-17.88	-	-	0	101	H
3	16.519059	50.12	PK-U	41.70	0.00	-40.85	50.97	-	-	68.2	-17.23	0	101	H
4	16.52352	50.48	PK-U	41.70	0.00	-40.84	51.34	-	-	68.2	-16.86	0	101	V
6	*17.974232	47.36	PK-U	42.10	0.00	-35.62	53.84	-	-	74	-20.16	0	101	V
5	* 17.974467	47.41	PK-U	42.10	0.00	-35.62	53.89	-	-	74	-20.11	0	101	H
5	* 17.975569	35.54	ADR	42.10	0.00	-35.61	42.03	54	-11.97	-	-	0	101	H
6	* 17.999834	35.45	ADR	42.10	0.00	-35.82	41.73	54	-12.27	-	-	0	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.1.28. 802.11n/ac SISO MODE IN UNII-3 BAND BANDEDGE

UNII-3 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	ACF (dB/m)	DCCF (dB)	Conversion Factor (dB)	Amp/Cbl/ Filt/Pad (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
HT20	5745	6	5.648717	-50.34	Pk	34.50	0.00	11.80	-32.37	-36.41	-	-	-27	-9.41	136	115	H
			5.725000	-30.01	Pk	34.60	0.00	11.80	-32.20	-15.81	-	-	27	-42.81	136	115	H
			5.626333	-50.25	Pk	34.50	0.00	11.80	-32.39	-36.34	-	-	-27	-9.34	215	101	V
			5.725000	-31.29	Pk	34.60	0.00	11.80	-32.20	-17.09	-	-	27	-44.09	215	101	V
		5	5.649951	-47.35	Pk	34.20	0.00	11.80	-37.80	-39.15	-	-	-27	-12.15	19	285	H
			5.725000	-24.01	Pk	34.40	0.00	11.80	-37.60	-15.41	-	-	27	-42.41	19	285	H
			5.632633	-46.76	Pk	34.20	0.00	11.80	-37.80	-38.56	-	-	-27	-11.56	46	113	V
			5.725000	-18.91	Pk	34.40	0.00	11.80	-37.60	-10.31	-	-	27	-37.31	46	113	V
	5825	6	5.850000	-41.53	Pk	35.00	0.00	11.80	-31.92	-26.65	-	-	27	-53.65	139	317	H
			5.959050	-50.07	Pk	35.20	0.00	11.80	-31.70	-34.77	-	-	-27	-7.77	139	317	H
			5.850000	-42.43	Pk	35.00	0.00	11.80	-31.92	-27.55	-	-	27	-54.55	176	104	V
			5.958375	-50.19	Pk	35.20	0.00	11.80	-31.72	-34.91	-	-	-27	-7.91	176	104	V
		5	5.850000	-46.21	Pk	35.00	0.00	11.80	-33.10	-32.51	-	-	27	-59.51	241	102	H
			5.927234	-63.00	Pk	35.20	0.00	11.80	-33.00	-49.00	-	-	-27	-22.00	241	102	H
			5.850000	-50.15	Pk	35.00	0.00	11.80	-33.10	-36.45	-	-	27	-63.45	261	153	V
			5.987036	-64.37	Pk	35.30	0.00	11.80	-32.90	-50.17	-	-	-27	-23.17	261	153	V
HT40	5755	6	5.725000	-25.43	Pk	34.80	0.00	11.80	-35.06	-13.89	-	-	27	-40.89	273	386	H
			5.637517	-48.25	Pk	34.60	0.00	11.80	-35.09	-36.94	-	-	-27	-9.94	273	386	H
			5.725000	-29.10	Pk	34.80	0.00	11.80	-35.06	-17.56	-	-	27	-44.56	294	106	V
			5.647750	-48.38	Pk	34.60	0.00	11.80	-34.91	-36.89	-	-	-27	-9.89	294	106	V
		5	5.725000	-24.15	Pk	34.60	0.00	11.80	-30.20	-7.95	-	-	27	-34.95	350	229	H
			5.641089	-53.31	Pk	34.50	0.00	11.80	-30.30	-37.31	-	-	-27	-10.31	350	229	H
			5.725000	-27.87	Pk	34.60	0.00	11.80	-30.20	-11.67	-	-	27	-38.67	43	115	V
			5.632857	-54.19	Pk	34.50	0.00	11.80	-30.30	-38.19	-	-	-27	-11.19	43	115	V
	5795	6	5.850000	-43.66	Pk	35.20	0.00	11.80	-34.40	-31.06	-	-	27	-58.06	244	396	H
			5.949775	-51.75	Pk	35.50	0.00	11.80	-34.40	-38.85	-	-	-27	-11.85	244	396	H
			5.850000	-39.71	Pk	35.20	0.00	11.80	-34.40	-27.11	-	-	27	-54.11	286	103	V
			5.927775	-52.09	Pk	35.40	0.00	11.80	-34.40	-39.29	-	-	-27	-12.29	286	103	V
		5	5.850000	-57.16	Pk	35.00	0.00	11.80	-30.00	-40.36	-	-	27	-67.36	358	201	H
			5.989662	-55.04	Pk	35.50	0.00	11.80	-29.70	-37.44	-	-	-27	-10.44	358	201	H
			5.850000	-57.73	Pk	35.00	0.00	11.80	-30.00	-40.93	-	-	27	-67.93	32	183	V
			5.982395	-55.07	Pk	35.50	0.00	11.80	-29.80	-37.57	-	-	-27	-10.57	32	183	V
VHT80	5775 (Lower)	6	5.725000	-28.37	Pk	34.70	0.00	11.80	-33.90	-15.77	-	-	27	-42.77	13	376	H
			5.653597	-43.50	Pk	34.60	0.00	11.80	-34.00	-31.10	-	-	-24.34	-6.76	13	376	H
			5.725000	-29.22	Pk	34.70	0.00	11.80	-33.90	-16.62	-	-	27	-43.62	57	101	V
			5.647784	-47.48	Pk	34.60	0.00	11.80	-34.00	-35.08	-	-	-27	-8.08	57	101	V
		5	5.725000	-27.40	Pk	34.60	0.00	11.80	-30.20	-11.20	-	-	27	-38.20	358	229	H
			5.650278	-47.99	Pk	34.50	0.00	11.80	-30.30	-31.99	-	-	-26.79	-5.20	358	229	H
			5.725000	-32.97	Pk	34.60	0.00	11.80	-30.20	-16.77	-	-	27	-43.77	49	114	V
			5.649790	-51.64	Pk	34.50	0.00	11.80	-30.30	-35.64	-	-	-27	-8.64	49	114	V
	5775 (Upper)	6	5.850000	-49.77	Pk	35.00	0.00	11.80	-33.70	-36.67	-	-	27	-63.67	58	115	H
			5.948978	-52.47	Pk	35.10	0.00	11.80	-33.60	-39.17	-	-	-27	-12.17	58	115	H
			5.850000	-36.15	Pk	35.00	0.00	11.80	-33.70	-23.05	-	-	27	-50.05	228	101	V
			5.926643	-51.64	Pk	35.10	0.00	11.80	-33.70	-38.44	-	-	-27	-11.44	228	101	V
		5	5.850000	-32.84	Pk	35.00	0.00	11.80	-30.00	-16.04	-	-	27	-43.04	3	237	H
			5.926868	-51.86	Pk	35.40	0.00	11.80	-29.90	-34.56	-	-	-27	-7.56	3	237	H
			5.850000	-38.87	Pk	35.00	0.00	11.80	-30.00	-22.07	-	-	27	-49.07	51	120	V
			5.927347	-53.89	Pk	35.40	0.00	11.80	-29.90	-36.59	-	-	-27	-9.59	51	120	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.29. 802.11n/ac MIMO MODE IN UNII-3 BAND - BANDEDGE

UNII-3 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	ACF (dB/m)	DCCF (dB)	Conversion on Factor (dB)	Amp/Cb/ Ftr/Pad (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity		
HT20	5745	6+5	5.725000	-22.09	Pk	34.90	0.00	11.80	-34.60	-9.99	-	-	27	-36.99	266	199	H		
			5.630933	-48.86	Pk	34.70	0.00	11.80	-34.60	-36.96	-	-	-27	-9.96	266	199	H		
			5.725000	-23.73	Pk	34.90	0.00	11.80	-34.60	-11.63	-	-	27	-38.63	298	105	V		
			5.647817	-49.17	Pk	34.70	0.00	11.80	-34.60	-37.27	-	-	-27	-10.27	298	105	V		
			5.850000	-34.09	Pk	35.20	0.00	11.80	-34.40	-21.49	-	-	27	-48.49	263	215	H		
	5825		5.971275	-51.99	Pk	35.60	0.00	11.80	-34.40	-38.99	-	-	-27	-11.99	263	215	H		
			5.850000	-35.75	Pk	35.20	0.00	11.80	-34.40	-23.15	-	-	27	-50.15	310	102	V		
			5.978325	-52.53	Pk	35.60	0.00	11.80	-34.20	-39.33	-	-	-27	-12.33	310	102	V		
			HT40	5755	5.725000	-23.13	Pk	34.70	0.00	11.80	-33.90	-10.53	-	-	27	-37.53	219	102	H
					5.648252	-49.40	Pk	34.60	0.00	11.80	-34.00	-37.00	-	-	-27	-10.00	219	102	H
5.725000	-28.50	Pk			34.70	0.00	11.80	-33.90	-15.90	-	-	27	-42.90	237	103	V			
5.651890	-49.66	Pk			34.60	0.00	11.80	-34.00	-37.26	-	-	-25.6	-11.66	237	103	V			
5.850000	-43.21	Pk			35.00	0.00	11.80	-33.70	-30.11	-	-	27	-57.11	263	228	H			
5795	5.948306	-51.00		Pk	35.10	0.00	11.80	-33.60	-37.70	-	-	-27	-10.70	263	228	H			
	5.850000	-44.19		Pk	35.00	0.00	11.80	-33.70	-31.09	-	-	27	-58.09	229	235	V			
	5.971819	-52.67		Pk	35.10	0.00	11.80	-33.60	-39.37	-	-	-27	-12.37	229	235	V			
	VHT80	5775 (Lower)		5.647234	-45.53	Pk	34.50	0.00	11.80	-32.42	-31.65	-	-	-27	-4.65	32	186	H	
				5.725000	-29.07	Pk	34.60	0.00	11.80	-32.20	-14.87	-	-	27	-41.87	32	186	H	
5.649700			-47.29	Pk	34.50	0.00	11.80	-32.37	-33.36	-	-	-27	-6.36	345	133	V			
5.725000			-28.57	Pk	34.60	0.00	11.80	-32.20	-14.37	-	-	27	-41.37	345	133	V			
5.850000			-34.75	Pk	35.00	0.00	11.80	-31.92	-19.87	-	-	27	-46.87	47	101	H			
5775 (Upper)		5.926100	-48.24	Pk	35.10	0.00	11.80	-31.92	-33.26	-	-	-27	-6.26	47	101	H			
		5.850000	-36.83	Pk	35.00	0.00	11.80	-31.92	-21.95	-	-	27	-48.95	353	182	V			
		5.981100	-50.36	Pk	35.30	0.00	11.80	-31.71	-34.97	-	-	-27	-7.97	353	182	V			

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.30. 802.11be SISO SU MODE IN UNII-3 BAND - BANDEDGE

UNII-3 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	ACF (dB/m)	DCCF (dB)	Conversion Factor (dB)	Amp/CbI/Fltr/Pad (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 SU Mode	5745	6	5.725000	-29.50	Pk	34.50	0.00	11.80	-34.41	-17.61	-	-	27	-44.61	156	249	H
			5.649951	-49.33	Pk	34.60	0.00	11.80	-34.51	-37.44	-	-	-27	-10.44	156	249	H
			5.725000	-29.78	Pk	34.50	0.00	11.80	-34.41	-17.89	-	-	27	-44.89	171	139	V
			5.629333	-49.27	Pk	34.60	0.00	11.80	-34.56	-37.43	-	-	-27	-10.43	171	139	V
			5.725000	-16.28	Pk	34.80	0.00	11.80	-36.54	-6.22	-	-	27	-33.22	319	278	H
		5	5.647367	-47.93	Pk	34.60	0.00	11.80	-36.62	-38.15	-	-	-27	-11.15	319	278	H
			5.725000	-24.22	Pk	34.80	0.00	11.80	-36.54	-14.16	-	-	27	-41.16	266	288	V
			5.626133	-48.89	Pk	34.60	0.00	11.80	-36.62	-39.11	-	-	-27	-12.11	266	288	V
			5.850000	-36.31	Pk	35.00	0.00	11.80	-30.00	-19.51	-	-	27	-46.51	262	281	H
			5.978710	-54.59	Pk	35.50	0.00	11.80	-29.70	-36.99	-	-	-27	-9.99	262	281	H
	5825	6	5.850000	-36.97	Pk	35.00	0.00	11.80	-30.00	-20.17	-	-	27	-47.17	249	274	V
			5.981382	-54.34	Pk	35.50	0.00	11.80	-29.80	-36.84	-	-	-27	-9.84	249	274	V
			5.850000	-24.08	Pk	35.00	0.00	11.80	-36.46	-13.74	-	-	27	-40.74	324	247	H
		5	5.976125	-47.19	Pk	35.30	0.00	11.80	-36.20	-36.29	-	-	-27	-9.29	324	247	H
			5.850000	-28.79	Pk	35.00	0.00	11.80	-36.46	-18.45	-	-	27	-45.45	3	217	V
			5.982325	-48.54	Pk	35.30	0.00	11.80	-36.18	-37.62	-	-	-27	-10.62	3	217	V
EHT40 SU Mode	5755	6	5.725000	-18.18	Pk	35.10	0.00	11.80	-37.50	-8.78	-	-	27	-35.78	276	372	H
			5.634584	-47.16	Pk	35.00	0.00	11.80	-37.90	-38.26	-	-	-27	-11.26	276	372	H
			5.725000	-22.67	Pk	35.10	0.00	11.80	-37.50	-13.27	-	-	27	-40.27	337	150	V
			5.632900	-47.92	Pk	35.00	0.00	11.80	-37.90	-39.02	-	-	-27	-12.02	337	150	V
			5.725000	-25.74	Pk	34.60	0.00	11.80	-30.20	-9.54	-	-	27	-36.54	34	207	H
		5	5.648140	-53.24	Pk	34.50	0.00	11.80	-30.30	-37.24	-	-	-27	-10.24	34	207	H
			5.725000	-26.03	Pk	34.60	0.00	11.80	-30.20	-9.83	-	-	27	-36.83	37	211	V
			5.629988	-54.50	Pk	34.50	0.00	11.80	-30.40	-38.60	-	-	-27	-11.60	37	211	V
			5.850000	-38.18	Pk	35.30	0.00	11.80	-37.30	-28.38	-	-	27	-55.38	330	111	H
			5.987600	-48.03	Pk	35.60	0.00	11.80	-36.90	-37.53	-	-	-27	-10.53	330	111	H
	5795	6	5.850000	-35.37	Pk	35.30	0.00	11.80	-37.30	-25.57	-	-	27	-52.57	327	103	V
			5.947275	-47.20	Pk	35.40	0.00	11.80	-37.03	-37.03	-	-	-27	-10.03	327	103	V
			5.850000	-37.53	Pk	35.00	0.00	11.80	-30.00	-20.73	-	-	27	-47.73	356	217	H
		5	5.958739	-53.98	Pk	35.40	0.00	11.80	-29.80	-36.58	-	-	-27	-9.58	356	217	H
			5.850000	-44.12	Pk	35.00	0.00	11.80	-30.00	-27.32	-	-	27	-54.32	33	217	V
			5.997922	-54.62	Pk	35.50	0.00	11.80	-29.70	-37.02	-	-	-27	-10.02	33	217	V
EHT80 SU Mode	5775 (Lower)	6	5.725000	-26.26	Pk	35.10	0.00	11.80	-37.50	-16.86	-	-	27	-43.86	267	387	H
			5.629833	-43.67	Pk	35.00	0.00	11.80	-37.90	-34.77	-	-	-27	-7.77	267	387	H
			5.725000	-27.21	Pk	35.10	0.00	11.80	-37.50	-17.81	-	-	27	-44.81	348	105	V
		5	5.646617	-44.66	Pk	34.90	0.00	11.80	-37.80	-35.76	-	-	-27	-8.76	348	105	V
			5.725000	-23.30	Pk	34.80	0.00	11.80	-36.54	-13.24	-	-	27	-40.24	318	174	H
	5775 (Upper)	6	5.650017	-41.88	Pk	34.60	0.00	11.80	-36.63	-32.11	-	-	-26.99	-6.12	318	174	H
			5.725000	-33.29	Pk	34.80	0.00	11.80	-36.54	-23.23	-	-	27	-50.23	51	162	V
			5.647900	-48.16	Pk	34.60	0.00	11.80	-36.61	-38.37	-	-	-27	-11.37	51	162	V
		5	5.850000	-34.31	Pk	35.30	0.00	11.80	-37.30	-24.51	-	-	27	-51.51	329	118	H
			5.946100	-47.81	Pk	35.40	0.00	11.80	-37.00	-37.61	-	-	-27	-10.61	329	118	H
5.850000	-31.84	Pk	35.30	0.00	11.80	-37.30	-22.04	-	-	27	-49.04	305	103	V			
5.954150	-46.38	Pk	35.40	0.00	11.80	-37.00	-36.18	-	-	-27	-9.18	305	103	V			
5.850000	-29.00	Pk	35.00	0.00	11.80	-36.46	-18.66	-	-	27	-45.66	321	198	H			
5.927975	-45.32	Pk	35.20	0.00	11.80	-36.29	-34.61	-	-	-27	-7.61	351	198	H			
5.850000	-32.65	Pk	35.00	0.00	11.80	-36.46	-22.31	-	-	27	-49.31	358	154	V			
5.956075	-48.26	Pk	35.20	0.00	11.80	-36.16	-37.42	-	-	-27	-10.42	358	154	V			

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.31. 802.11be SISO PARTIAL RU MODE IN UNII-3 BAND – BANDEDGE

UNII-3 (SISO)	Channel Frequency (MHz)	Ant. #		Frequency (GHz)	Meter Reading (dBm)	Det	ACF (dB/m)	DCCF (dB)	Conversi on Factor (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity					
EHT20 26T - RU0	5745	6		5.725000	-41.43	Pk	34.50	0.00	11.80	-34.41	-29.54	-	-	27	-56.54	125	349	H					
				5.649584	-49.46	Pk	34.60	0.00	11.80	-34.51	-37.57	-	-	-27	-10.57	125	349	H					
				5.725000	-42.23	Pk	34.50	0.00	11.80	-34.41	-30.34	-	-	-	-	27	-57.34	169	130	V			
				5.625283	-48.76	Pk	34.60	0.00	11.80	-34.57	-36.93	-	-	-27	-9.93	169	130	V					
		5		5.725000	-39.31	Pk	35.10	0.00	11.80	-35.06	-27.47	-	-	-	-	27	-54.47	310	116	H			
				5.632700	-49.01	Pk	35.00	0.00	11.80	-35.01	-37.22	-	-	-27	-10.22	310	116	H					
				5.725000	-37.33	Pk	35.10	0.00	11.80	-35.06	-25.49	-	-	-	-	27	-52.49	261	102	V			
				5.649884	-48.40	Pk	35.00	0.00	11.80	-35.13	-36.73	-	-	-27	-9.73	261	102	V					
			6		5.850000	-46.87	Pk	35.00	0.00	11.80	-36.46	-36.53	-	-	-	-	27	-63.53	295	344	H		
					5.947025	-48.32	Pk	35.20	0.00	11.80	-36.14	-37.46	-	-	-27	-10.46	295	344	H				
EHT20 26T - RU8	5825	6			5.850000	-51.73	Pk	35.00	0.00	11.80	-36.46	-41.39	-	-	27	-68.39	204	134	V				
					5.986850	-48.17	Pk	35.30	0.00	11.80	-36.21	-37.28	-	-	-27	-10.28	204	134	V				
					5.850000	-43.16	Pk	35.00	0.00	11.80	-36.46	-32.82	-	-	-	-	27	-59.82	131	180	H		
					5.984275	-48.48	Pk	35.30	0.00	11.80	-36.20	-37.58	-	-	-27	-10.58	131	180	H				
		5		5.850000	-49.87	Pk	35.00	0.00	11.80	-36.46	-39.53	-	-	-	-	27	-66.53	189	184	V			
				5.927800	-48.45	Pk	35.20	0.00	11.80	-36.29	-37.74	-	-	-27	-10.74	189	184	V					
			EHT80 484+242T - RU93	5775 (Lower)	6		5.725000	-35.32	Pk	34.90	0.00	11.80	-36.82	-25.44	-	-	27	-52.44	329	112	H		
							5.629400	-48.22	Pk	34.80	0.00	11.80	-36.93	-38.55	-	-	-27	-11.55	329	112	H		
							5.725000	-30.86	Pk	34.90	0.00	11.80	-36.82	-20.98	-	-	-	-	27	-47.98	330	102	V
							5.644884	-47.78	Pk	34.80	0.00	11.80	-36.89	-38.07	-	-	-27	-11.07	330	102	V		
5		5.725000			-25.93	Pk	34.90	0.00	11.80	-36.82	-16.05	-	-	-	-	27	-43.05	285	105	H			
		5.637917			-46.83	Pk	34.80	0.00	11.80	-36.93	-37.16	-	-	-27	-10.16	285	105	H					
		5.725000			-30.40	Pk	34.90	0.00	11.80	-36.82	-20.52	-	-	-	-	27	-47.52	11	196	V			
		5.645784			-47.79	Pk	34.80	0.00	11.80	-36.87	-38.06	-	-	-27	-11.06	11	196	V					
EHT80 484+242T - RU90	5775 (Upper)	6		5.850000	-40.42	Pk	35.30	0.00	11.80	-36.69	-30.01	-	-	-	-	27	-57.01	329	110	H			
				5.971750	-48.01	Pk	35.60	0.00	11.80	-36.65	-37.26	-	-	-27	-10.26	329	110	H					
				5.850000	-34.42	Pk	35.30	0.00	11.80	-36.69	-24.01	-	-	-	-	27	-51.01	343	110	V			
				5.965675	-47.23	Pk	35.60	0.00	11.80	-36.64	-36.47	-	-	-27	-9.47	343	110	V					
		5		5.850000	-46.83	Pk	35.30	0.00	11.80	-36.69	-36.42	-	-	-	-	27	-63.42	312	332	H			
				5.992025	-47.65	Pk	35.60	0.00	11.80	-36.60	-36.85	-	-	-27	-9.85	312	332	H					
				5.850000	-50.14	Pk	35.30	0.00	11.80	-36.69	-39.73	-	-	-	-	27	-66.73	227	227	V			
				5.990700	-48.73	Pk	35.60	0.00	11.80	-36.63	-37.96	-	-	-27	-10.96	227	227	V					

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.32. 802.11be MIMO SU MODE IN UNII-3 BAND - BANDEDGE

UNII-3 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	ACF (dB/m)	DCCF (dB)	Conversi on Factor (dB)	Amp/Cbl/ Filtr/Pad (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity		
EHT20 SU Mode	5745	6+5	5.725000	-20.77	Pk	35.10	0.00	11.80	-35.06	-8.93	-	-	27	-35.93	327	200	H		
			5.642967	-48.64	Pk	35.00	0.00	11.80	-35.07	-36.91	-	-	-27	-9.91	327	200	H		
			5.725000	-23.09	Pk	35.10	0.00	11.80	-35.06	-11.25	-	-	27	-38.25	54	107	V		
			5.644834	-48.48	Pk	35.00	0.00	11.80	-35.06	-36.74	-	-	-27	-9.74	54	107	V		
			5.850000	-26.13	Pk	35.10	0.00	11.80	-34.85	-14.08	-	-	27	-41.08	36	105	H		
	5825		5.974470	-48.22	Pk	35.30	0.00	11.80	-34.90	-36.02	-	-	-27	-9.02	36	105	H		
			5.850000	-29.49	Pk	35.10	0.00	11.80	-34.85	-17.44	-	-	27	-44.44	49	239	V		
			5.943480	-49.48	Pk	35.30	0.00	11.80	-34.73	-37.11	-	-	-27	-10.11	49	239	V		
			EHT40 SU Mode	5755	5.725000	-29.12	Pk	34.70	0.00	11.80	-31.75	-14.37	-	-	27	-41.37	145	201	H
					5.631383	-47.99	Pk	34.70	0.00	11.80	-31.87	-33.36	-	-	-27	-6.36	145	201	H
5.725000	-29.85	Pk			34.70	0.00	11.80	-31.75	-15.10	-	-	27	-42.10	237	115	V			
5.643217	-50.13	Pk			34.70	0.00	11.80	-31.86	-35.49	-	-	-27	-8.49	237	115	V			
5.850000	-42.06	Pk			35.00	0.00	11.80	-31.62	-26.88	-	-	27	-53.88	191	221	H			
5795	5.940125	-49.59		Pk	35.30	0.00	11.80	-31.38	-33.87	-	-	-27	-6.87	191	221	H			
	5.850000	-45.56		Pk	35.00	0.00	11.80	-31.62	-30.38	-	-	27	-57.38	229	112	V			
	5.942925	-49.31		Pk	35.30	0.00	11.80	-31.38	-33.59	-	-	-27	-6.59	229	112	V			
	EHT80 SU Mode	5775 (Lower)		5.725000	-42.26	Pk	34.80	0.00	11.80	-22.80	-18.46	-	-	27	-45.46	353	101	H	
				5.652251	-53.93	Pk	34.70	0.00	11.80	-22.90	-30.33	-	-	-25.33	-5.00	353	101	H	
5.725000			-41.10	Pk	34.80	0.00	11.80	-22.80	-17.30	-	-	27	-44.30	73	112	V			
5.650751			-58.66	Pk	34.70	0.00	11.80	-22.90	-35.06	-	-	-26.44	-8.62	73	112	V			
5.850000			-35.64	Pk	35.00	0.00	11.80	-30.00	-18.84	-	-	27	-45.84	30	167	H			
5775 (Higher)		5.950103	-52.22	Pk	35.40	0.00	11.80	-29.90	-34.92	-	-	-27	-7.92	30	167	H			
		5.850000	-35.57	Pk	35.00	0.00	11.80	-30.00	-18.77	-	-	27	-45.77	45	106	V			
		5.945715	-54.63	Pk	35.40	0.00	11.80	-29.80	-37.23	-	-	-27	-10.23	45	106	V			

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

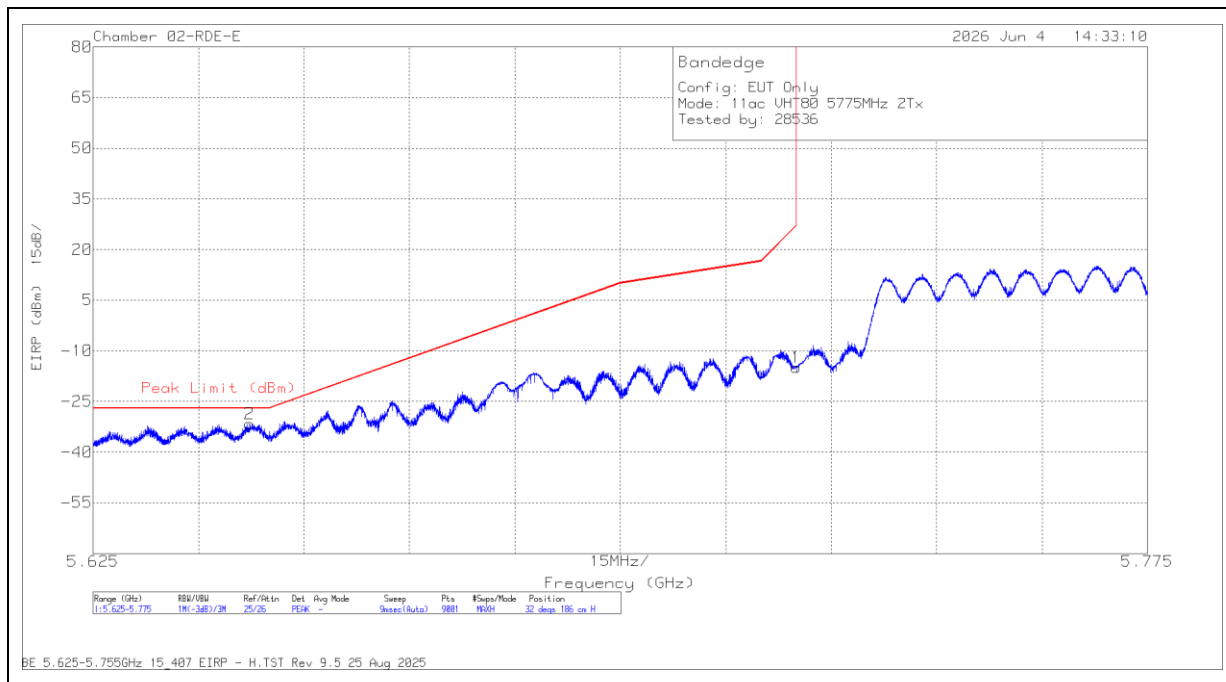
1.1.33. 802.11be MIMO PARTIAL RU MODE IN UNII-3 BAND - BANDEDGE

UNII-3 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	ACF (dB/m)	DCCF (dB)	Conversi on Factor (dB)	Amp/Cbl/ Filtr/Pad (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 26T - RU0	5745	6+5	5.725000	-37.72	Pk	35.10	0.00	11.80	-35.06	-25.88	-	-	27	-52.88	315	207	H
			5.632183	-48.53	Pk	35.00	0.00	11.80	-35.02	-36.75	-	-	-27	-9.75	315	207	H
			5.725000	-41.79	Pk	35.10	0.00	11.80	-35.06	-29.95	-	-	27	-56.95	51	137	V
			5.630100	-49.27	Pk	35.00	0.00	11.80	-34.98	-37.45	-	-	-27	-10.45	51	137	V
EHT20 26T - RU8	5825	6+5	5.850000	-43.80	Pk	35.10	0.00	11.80	-34.85	-31.75	-	-	27	-58.75	36	105	H
			5.971500	-48.59	Pk	35.30	0.00	11.80	-34.87	-36.36	-	-	-27	-9.36	36	105	H
			5.850000	-47.77	Pk	35.10	0.00	11.80	-34.85	-35.72	-	-	27	-62.72	49	239	V
			5.937510	-49.46	Pk	35.30	0.00	11.80	-34.70	-37.06	-	-	-27	-10.06	49	239	V
EHT80 484+242T - RU93	5775 (Lower)	6+5	5.725000	-27.18	Pk	34.90	0.00	11.80	-36.82	-17.30	-	-	27	-44.30	126	194	H
			5.645717	-46.18	Pk	34.80	0.00	11.80	-36.87	-36.45	-	-	-27	-9.45	126	194	H
			5.725000	-31.06	Pk	34.90	0.00	11.80	-36.82	-21.18	-	-	27	-48.18	171	138	V
			5.647817	-47.96	Pk	34.80	0.00	11.80	-36.87	-38.23	-	-	-27	-11.23	171	138	V
EHT80 484+242T - RU90	5775 (Upper)	6+5	5.850000	-35.26	Pk	35.30	0.00	11.80	-36.69	-24.85	-	-	27	-51.85	156	190	H
			5.936650	-47.45	Pk	35.50	0.00	11.80	-36.66	-36.81	-	-	-27	-9.81	156	190	H
			5.850000	-38.53	Pk	35.30	0.00	11.80	-36.69	-28.12	-	-	27	-55.12	170	116	V
			5.973800	-48.10	Pk	35.60	0.00	11.80	-36.65	-37.35	-	-	-27	-10.35	170	116	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

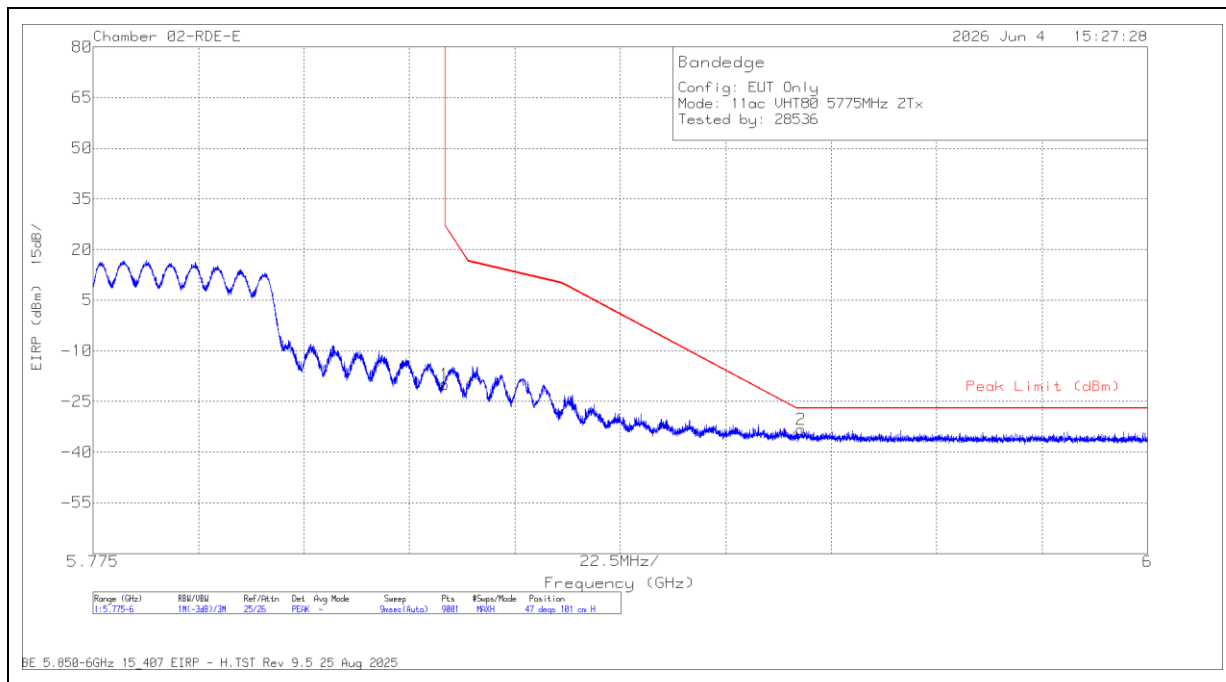
WORST-CASE BANDEDGE (LOW CHANNEL)**802.11ac VHT80 / 5775 MHz / MIMO 2TX****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	ACF (dB/m)	DCCF (dB)	Conversion Factor (dB)	Amp/Cbl/Filtr/Pad (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.647234	-45.53	Pk	34.5	0.00	11.80	-32.42	-31.65	-	-	-27	-4.65	32	186	H
2	5.725000	-29.07	Pk	34.6	0.00	11.80	-32.20	-14.87	-	-	27	-41.87	32	186	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

WORST-CASE BANDEDGE (HIGH CHANNEL)**802.11ac VHT80 / 5775 MHz / MIMO 2TX****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	ACF (dB/m)	DCCF (dB)	Conversion Factor (dB)	Amp/Cbl/Filtr/Pad (dB)	Correct Reading EIRP (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.850000	-34.75	Pk	35.0	0.00	11.80	-31.92	-19.87	-	-	27	-46.87	47	101	H
2	5.926100	-48.24	Pk	35.1	0.00	11.80	-31.92	-33.26	-	-	-27	-6.26	47	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.34. 802.11n/ac MIMO MODE IN UNII-3 BAND – SPURIOUS EMISSIONS

20MHz

UNII-3 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
HT20	5745	6+5	8.996708	55.09	PK-U	36.20	0.00	-44.55	46.74	-	-	68.2	-21.46	0	101	V
			* 9.000614	43.01	ADR	36.20	0.00	-44.48	34.73	54	-19.27	-	-	0	199	H
			* 9.005569	54.51	PK-U	36.20	0.00	-44.40	46.31	-	-	74	-27.69	0	199	H
			* 11.477690	52.55	PK-U	38.10	0.00	-42.75	47.90	-	-	74	-26.1	0	101	V
			* 11.482224	40.71	ADR	38.10	0.00	-42.82	35.99	54	-18.01	-	-	0	101	H
			* 11.487068	40.55	ADR	38.10	0.00	-42.88	35.77	54	-18.23	-	-	0	101	V
			* 11.494127	52.55	PK-U	38.10	0.00	-42.84	47.81	-	-	74	-26.19	0	101	H
			17.222308	48.30	PK-U	41.60	0.00	-39.68	50.22	-	-	68.2	-17.98	0	101	H
			17.257523	47.80	PK-U	41.60	0.00	-39.06	50.34	-	-	68.2	-17.86	0	101	V
			8.989667	54.64	PK-U	36.20	0.00	-44.49	46.35	-	-	68.2	-21.85	360	101	H
	5785		8.993079	55.54	PK-U	36.20	0.00	-44.55	47.19	-	-	68.2	-21.01	360	200	V
			* 9.000790	43.32	ADR	36.20	0.00	-44.48	35.04	54	-18.96	-	-	360	200	V
			* 9.001320	43.49	ADR	36.20	0.00	-44.47	35.22	54	-18.78	-	-	360	101	H
			* 11.577131	52.15	PK-U	38.20	0.00	-42.41	47.94	-	-	74	-26.06	360	101	V
			* 11.589469	40.56	ADR	38.20	0.00	-42.21	36.55	54	-17.45	-	-	360	101	V
			* 11.595988	40.41	ADR	38.20	0.00	-42.38	36.23	54	-17.77	-	-	360	200	H
			* 11.597908	51.79	PK-U	38.20	0.00	-42.50	47.49	-	-	74	-26.51	360	200	H
			17.357594	47.38	PK-U	41.60	0.00	-38.98	50.00	-	-	68.2	-18.2	360	101	V
			17.376610	47.73	PK-U	41.70	0.00	-38.64	50.79	-	-	68.2	-17.41	360	200	H
			* 9.013776	55.43	PK-U	36.20	0.00	-44.50	47.13	-	-	74	-26.87	360	101	V
	5825		* 9.032973	43.29	ADR	36.20	0.00	-44.30	35.19	54	-18.81	-	-	360	101	H
			* 9.033079	43.28	ADR	36.20	0.00	-44.30	35.18	54	-18.82	-	-	360	101	V
			* 9.037697	54.90	PK-U	36.20	0.00	-44.32	46.78	-	-	74	-27.22	360	101	H
			* 11.657749	52.63	PK-U	38.30	0.00	-42.53	48.40	-	-	74	-25.6	360	101	H
			* 11.662389	40.82	ADR	38.40	0.00	-42.53	36.69	54	-17.31	-	-	360	101	H
			* 11.667550	52.43	PK-U	38.40	0.00	-42.52	48.31	-	-	74	-25.69	360	200	V
			* 11.669963	40.48	ADR	38.40	0.00	-42.47	36.41	54	-17.59	-	-	360	200	V
			17.483647	47.70	PK-U	41.80	0.00	-38.71	50.79	-	-	68.2	-17.41	360	101	H
			17.488121	46.79	PK-U	41.80	0.00	-38.81	49.78	-	-	68.2	-18.42	360	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

40MHz

UNII-3 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
HT40	5755	6+5	* 3.902424	45.23	ADR	33.40	0.00	-46.97	31.66	54	-22.34	-	-	284	136	V
			* 3.905813	45.29	ADR	33.40	0.00	-46.89	31.80	54	-22.2	-	-	166	186	H
			* 3.907537	56.62	PK-U	33.40	0.00	-46.88	43.14	-	-	74	-30.86	284	136	V
			* 3.913867	57.10	PK-U	33.40	0.00	-46.83	43.67	-	-	74	-30.33	166	186	H
			10.249925	55.59	PK-U	37.50	0.00	-45.33	47.76	-	-	68.2	-20.44	242	389	H
			10.265180	55.78	PK-U	37.50	0.00	-45.22	48.06	-	-	68.2	-20.14	29	389	V
			17.613057	46.63	PK-U	42.00	0.00	-37.15	51.48	-	-	68.2	-16.72	302	371	V
			17.640975	47.40	PK-U	42.00	0.00	-35.64	53.76	-	-	68.2	-14.44	220	389	H
			3.044168	58.42	PK-U	32.90	0.00	-47.68	43.64	-	-	68.2	-24.56	149	271	V
			3.050060	58.34	PK-U	32.90	0.00	-47.71	43.53	-	-	68.2	-24.67	50	351	H
	5795		* 9.472322	44.09	ADR	36.70	0.00	-44.96	35.83	54	-18.17	-	-	337	336	V
			* 9.474938	44.03	ADR	36.70	0.00	-45.02	35.71	54	-18.29	-	-	319	359	H
			* 9.495364	55.58	PK-U	36.70	0.00	-45.10	47.18	-	-	74	-26.82	319	359	H
			* 9.499540	56.04	PK-U	36.70	0.00	-45.10	47.64	-	-	74	-26.36	337	336	V
			17.645830	47.07	PK-U	42.00	0.00	-35.59	53.48	-	-	68.2	-14.72	114	355	V
			17.654057	46.77	PK-U	42.00	0.00	-35.52	53.25	-	-	68.2	-14.95	8	364	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

80MHz

UNII-3 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filtr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
VHT80	5775	6+5	8.997912	54.57	PK-U	36.20	0.00	-44.53	46.24	-	-	68.2	-21.96	0	101	H
			* 9.005724	54.36	PK-U	36.20	0.00	-44.40	46.16	-	-	74	-27.84	0	101	V
			* 11.533682	40.19	ADR	38.10	0.00	-42.68	35.61	54	-18.39	-	-	0	101	H
			* 11.534361	40.41	ADR	38.10	0.00	-42.70	35.81	54	-18.19	-	-	0	200	V
			* 11.537784	52.27	PK-U	38.20	0.00	-42.74	47.73	-	-	74	-26.27	0	101	H
			* 11.540019	51.71	PK-U	38.20	0.00	-42.78	47.13	-	-	74	-26.87	0	200	V
			17.313851	47.05	PK-U	41.60	0.00	-38.87	49.78	-	-	68.2	-18.42	0	200	H
			17.316616	46.79	PK-U	41.60	0.00	-38.89	49.50	-	-	68.2	-18.7	0	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.1.35. 802.11be MIMO SU MODE IN UNII-3 BAND – SPURIOUS EMISSIONS

20MHz

UNII-3 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 SU Mode	5745	6+5	8.996560	54.58	PK-U	36.20	0.00	-44.55	46.23	-	-	68.2	-21.97	360	101	V
			* 9.001138	43.15	ADR	36.20	0.00	-44.47	34.88	54	-19.12	-	-	360	101	V
			* 9.013022	54.65	PK-U	36.20	0.00	-44.48	46.37	-	-	74	-27.63	360	101	H
			* 11.492481	40.24	ADR	38.10	0.00	-42.84	35.50	54	-18.5	-	-	360	199	H
			* 11.496067	51.92	PK-U	38.10	0.00	-42.79	47.23	-	-	74	-26.77	360	199	H
			* 11.510989	51.90	PK-U	38.10	0.00	-42.65	47.35	-	-	74	-26.65	360	200	V
			* 11.512718	40.24	ADR	38.10	0.00	-42.67	35.67	54	-18.33	-	-	360	200	V
			17.231618	48.15	PK-U	41.60	0.00	-39.59	50.16	-	-	68.2	-18.04	360	200	V
			17.247099	48.06	PK-U	41.60	0.00	-39.33	50.33	-	-	68.2	-17.87	360	199	H
	5785		8.999267	54.68	PK-U	36.20	0.00	-44.51	46.37	-	-	68.2	-21.83	360	101	H
			* 9.000734	43.01	ADR	36.20	0.00	-44.48	34.73	54	-19.27	-	-	360	101	V
			* 9.026836	43.29	ADR	36.20	0.00	-44.45	35.04	54	-18.96	-	-	360	101	H
			* 9.027849	54.80	PK-U	36.20	0.00	-44.44	46.56	-	-	74	-27.44	360	101	V
			* 11.564108	40.03	ADR	38.20	0.00	-42.33	35.90	54	-18.1	-	-	360	200	V
			* 11.570688	51.36	PK-U	38.20	0.00	-42.40	47.16	-	-	74	-26.84	360	101	H
			* 11.592277	51.89	PK-U	38.20	0.00	-42.29	47.80	-	-	74	-26.2	360	200	V
			* 11.593128	39.82	ADR	38.20	0.00	-42.28	35.74	54	-18.26	-	-	360	101	H
			17.34914	47.05	PK-U	41.60	0.00	-39.27	49.38	-	-	68.2	-18.82	360	200	V
	5825		17.375461	46.67	PK-U	41.70	0.00	-38.67	49.70	-	-	68.2	-18.5	360	101	H
			3.040657	58.34	PK-U	32.90	0.00	-47.68	43.56	-	-	68.2	-24.64	0	200	H
			3.046137	58.01	PK-U	32.90	0.00	-47.68	43.23	-	-	68.2	-24.97	0	101	V
			* 11.099780	41.18	ADR	37.70	0.00	-43.48	35.40	54	-18.6	-	-	0	200	V
			* 11.112621	41.14	ADR	37.70	0.00	-43.14	35.70	54	-18.3	-	-	0	101	H
			* 11.113301	53.28	PK-U	37.70	0.00	-43.16	47.82	-	-	74	-26.18	0	101	H
			* 11.130078	52.96	PK-U	37.70	0.00	-43.34	47.32	-	-	74	-26.68	0	200	V
			17.639878	46.01	PK-U	42.00	0.00	-35.64	52.37	-	-	68.2	-15.83	0	101	H
			17.646182	46.60	PK-U	42.00	0.00	-35.59	53.01	-	-	68.2	-15.19	0	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

40MHz

UNII-3 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT40 SU Mode	5755	6+5	8.991923	54.57	PK-U	36.20	0.00	-44.53	46.24	-	-	68.2	-21.96	360	101	H
			8.992139	54.75	PK-U	36.20	0.00	-44.53	46.42	-	-	68.2	-21.78	360	101	V
			* 9.000975	43.00	ADR	36.20	0.00	-44.47	34.73	54	-19.27	-	-	360	101	V
			* 9.030980	43.04	ADR	36.20	0.00	-44.36	34.88	54	-19.12	-	-	360	101	H
			* 11.479102	40.07	ADR	38.10	0.00	-42.80	35.37	54	-18.63	-	-	360	101	H
			* 11.481489	52.59	PK-U	38.10	0.00	-42.81	47.88	-	-	74	-26.12	360	101	H
			* 11.485129	52.00	PK-U	38.10	0.00	-42.86	47.24	-	-	74	-26.76	360	199	V
			* 11.494716	40.04	ADR	38.10	0.00	-42.83	35.31	54	-18.69	-	-	360	199	V
			17.261556	48.14	PK-U	41.60	0.00	-39.09	50.65	-	-	68.2	-17.55	360	200	H
			17.274694	47.20	PK-U	41.60	0.00	-39.41	49.39	-	-	68.2	-18.81	360	199	V
	5795		8.964836	54.15	PK-U	36.20	0.00	-44.43	45.92	-	-	68.2	-22.28	360	101	H
			8.973221	55.11	PK-U	36.20	0.00	-44.46	46.85	-	-	68.2	-21.35	360	101	V
			* 9.000310	43.10	ADR	36.20	0.00	-44.49	34.81	54	-19.19	-	-	360	101	V
			* 11.591354	40.25	ADR	38.20	0.00	-42.25	36.20	54	-17.8	-	-	360	199	V
			* 11.591709	51.84	PK-U	38.20	0.00	-42.28	47.76	-	-	74	-26.24	360	200	H
			* 11.594629	39.97	ADR	38.20	0.00	-42.37	35.80	54	-18.2	-	-	360	200	H
			* 11.599736	51.69	PK-U	38.20	0.00	-42.57	47.32	-	-	74	-26.68	360	199	V
			17.390704	47.17	PK-U	41.70	0.00	-38.99	49.88	-	-	68.2	-18.32	360	200	H
			17.392273	47.11	PK-U	41.70	0.00	-38.97	49.84	-	-	68.2	-18.36	360	199	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

80MHz

UNII-3 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filtr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT80 SU Mode	5775	6+5	8.995872	54.51	PK-U	36.20	0.00	-44.56	46.15	-	-	68.2	-22.05	360	200	H
			* 9.000488	54.69	PK-U	36.20	0.00	-44.49	46.40	-	-	74	-27.6	360	101	V
			* 9.029259	42.88	ADR	36.20	0.00	-44.41	34.67	54	-19.33	-	-	360	200	H
			* 9.032288	42.94	ADR	36.20	0.00	-44.32	34.82	54	-19.18	-	-	360	101	V
			* 11.536536	40.28	ADR	38.20	0.00	-42.72	35.76	54	-18.24	-	-	360	200	V
			* 11.538866	40.46	ADR	38.20	0.00	-42.74	35.92	54	-18.08	-	-	360	200	H
			* 11.542780	52.15	PK-U	38.20	0.00	-42.79	47.56	-	-	74	-26.44	360	200	V
			* 11.572746	52.25	PK-U	38.20	0.00	-42.43	48.02	-	-	74	-25.98	360	200	H
			17.316711	47.05	PK-U	41.60	0.00	-38.89	49.76	-	-	68.2	-18.44	360	200	H
			17.331464	47.38	PK-U	41.60	0.00	-39.19	49.79	-	-	68.2	-18.41	360	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.1.36. 802.11be MIMO PARTIAL RU MODE IN UNII-3 BAND – SPURIOUS EMISSIONS

UNII-3 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 26T - RU0	5745	6+5	3.149827	57.91	PK-U	33.00	0.00	-47.88	43.03	-	-	68.2	-25.17	360	200	H
			3.154726	57.57	PK-U	33.00	0.00	-47.89	42.68	-	-	68.2	-25.52	360	101	V
			9.797108	55.25	PK-U	37.00	0.00	-45.37	46.88	-	-	68.2	-21.32	360	101	H
			9.838264	56.14	PK-U	37.00	0.00	-45.34	47.80	-	-	68.2	-20.4	360	101	V
			16.888640	49.58	PK-U	42.00	0.00	-40.12	51.46	-	-	68.2	-16.74	360	101	H
			16.894109	49.67	PK-U	42.00	0.00	-40.23	51.44	-	-	68.2	-16.76	360	101	V
EHT20 26T - RU4	5785	6+5	3.092661	57.32	PK-U	33.00	0.00	-47.80	42.52	-	-	68.2	-25.68	360	101	V
			3.112094	57.20	PK-U	33.00	0.00	-47.89	42.31	-	-	68.2	-25.89	360	200	H
			9.924346	55.06	PK-U	37.10	0.00	-45.22	46.94	-	-	68.2	-21.26	360	199	V
			9.933280	55.77	PK-U	37.10	0.00	-45.24	47.63	-	-	68.2	-20.57	360	101	H
			16.752072	48.79	PK-U	42.10	0.00	-40.48	50.41	-	-	68.2	-17.79	360	101	H
			16.763448	49.15	PK-U	42.10	0.00	-40.51	50.74	-	-	68.2	-17.46	360	101	V
EHT20 26T - RU8	5825	6+5	* 3.801958	45.29	ADR	33.30	0.00	-47.03	31.56	54	-22.44	-	-	360	200	V
			* 3.803992	45.50	ADR	33.30	0.00	-47.14	31.66	54	-22.34	-	-	360	101	H
			* 3.806539	57.15	PK-U	33.30	0.00	-47.25	43.20	-	-	74	-30.8	360	101	H
			* 3.810405	57.16	PK-U	33.30	0.00	-47.34	43.12	-	-	74	-30.88	360	200	V
			16.756562	48.99	PK-U	42.10	0.00	-40.49	50.60	-	-	68.2	-17.6	360	101	V
			16.760871	48.55	PK-U	42.10	0.00	-40.49	50.16	-	-	68.2	-18.04	360	101	H
EHT80 484+242T - RU91	5775	6+5	9.926548	56.27	PK-U	37.10	0.00	-45.16	48.21	-	-	68.2	-19.99	360	101	H
			9.931734	56.27	PK-U	37.10	0.00	-45.20	48.17	-	-	68.2	-20.03	360	101	V
			* 4.021060	58.82	PK-U	33.50	0.00	-47.45	44.87	-	-	74	-29.13	360	101	H
			* 4.023700	46.03	ADR	33.50	0.00	-47.40	32.13	54	-21.87	-	-	360	101	H
			* 4.014003	57.47	PK-U	33.50	0.00	-47.26	43.71	-	-	74	-30.29	360	101	V
			* 4.020483	45.76	ADR	33.50	0.00	-47.46	31.80	54	-22.2	-	-	360	101	V
			* 11.492261	56.11	PK-U	38.20	0.00	-44.39	49.92	-	-	74	-24.08	360	101	H
			* 11.519764	43.80	ADR	38.20	0.00	-44.02	37.98	54	-16.02	-	-	360	101	H
			* 15.854630	54.08	PK-U	41.20	0.00	-41.94	53.34	-	-	74	-20.66	360	101	H
			* 15.861581	42.50	ADR	41.20	0.00	-41.82	41.88	54	-12.12	-	-	360	101	H
			* 11.495963	55.52	PK-U	38.20	0.00	-44.48	49.24	-	-	74	-24.76	360	101	V
			* 11.502207	44.01	ADR	38.20	0.00	-44.46	37.75	54	-16.25	-	-	360	101	V
EHT80 484+242T - RU91	5775	6+5	* 15.855380	54.50	PK-U	41.20	0.00	-41.91	53.79	-	-	74	-20.21	360	101	V
			* 15.862975	42.80	ADR	41.20	0.00	-41.78	42.22	54	-11.78	-	-	360	101	V

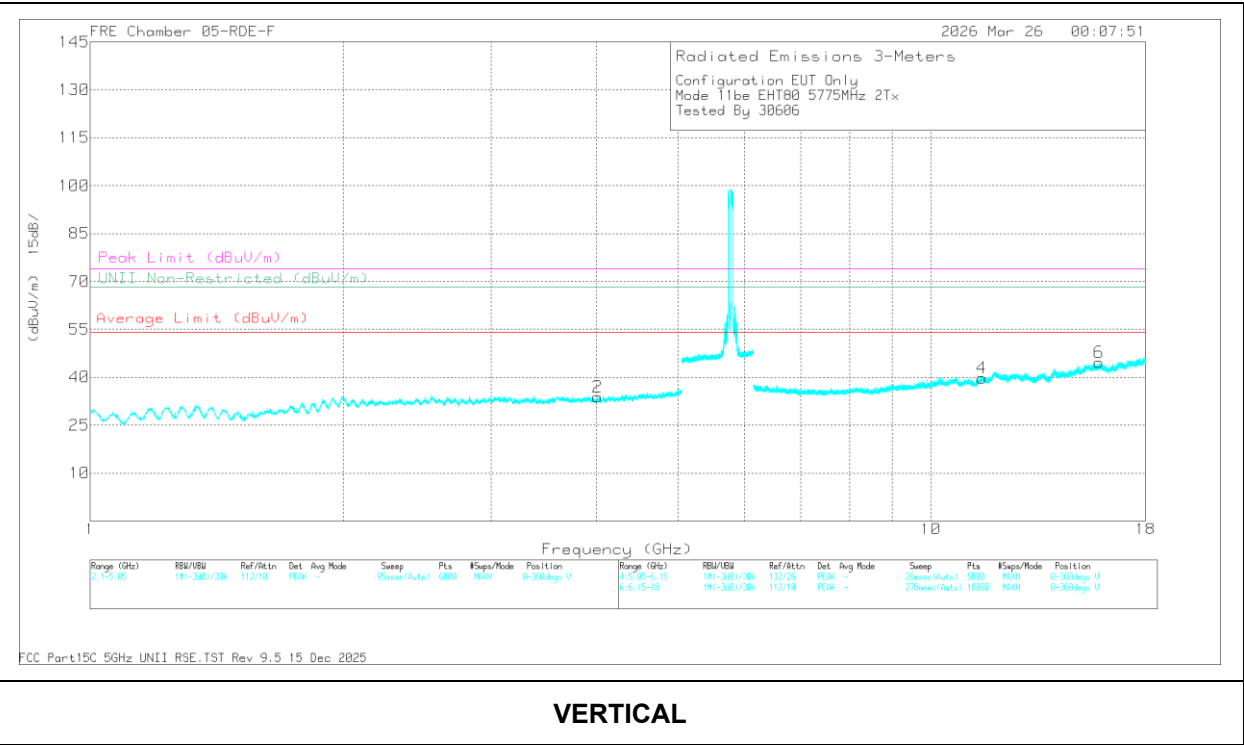
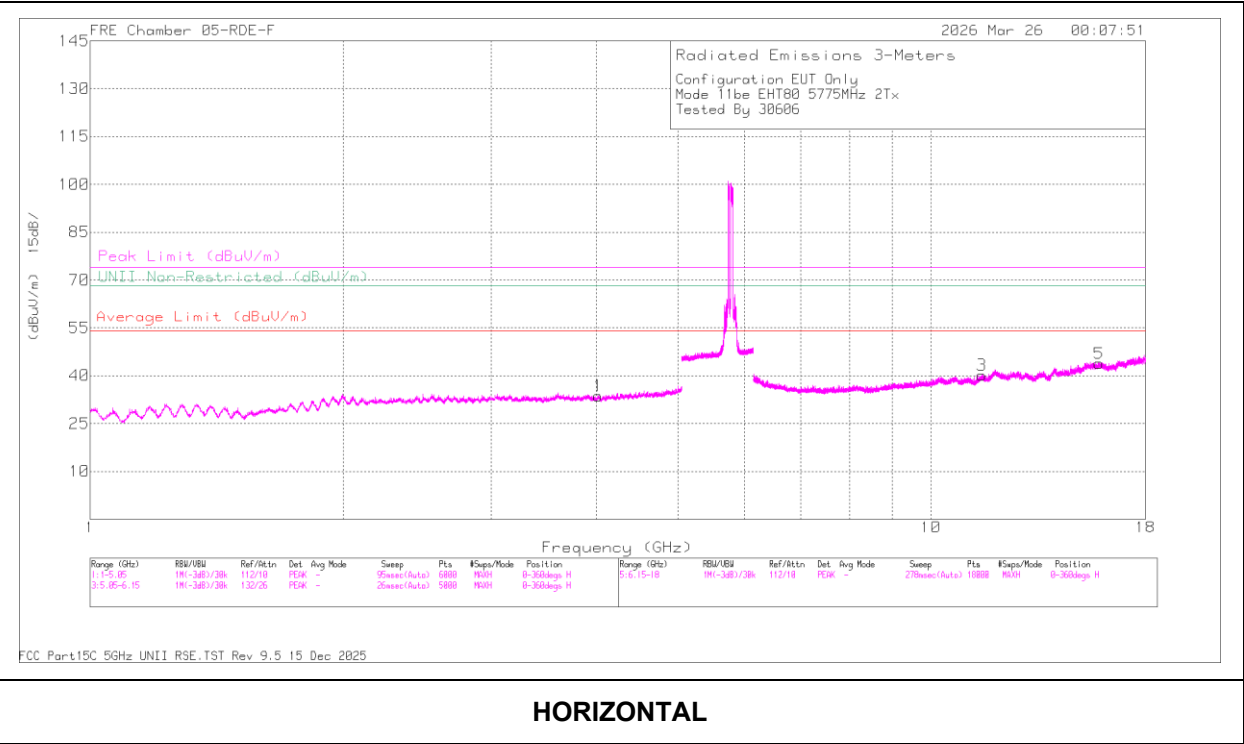
* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

WORST-CASE HARMONICS AND SPURIOUS EMISSIONS

802.11be EHT80 / 5775 MHz / 2TX CDD / 484+242T - RU91



Radiated Emissions

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filt/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.021060	58.82	PK-U	33.50	0.00	-47.45	44.87	-	-	74	-29.13	360	101	H
1	* 4.023700	46.03	ADR	33.50	0.00	-47.40	32.13	54	-21.87	-	-	360	101	H
2	* 4.014003	57.47	PK-U	33.50	0.00	-47.26	43.71	-	-	74	-30.29	360	101	V
2	* 4.020483	45.76	ADR	33.50	0.00	-47.46	31.80	54	-22.2	-	-	360	101	V
3	* 11.492261	56.11	PK-U	38.20	0.00	-44.39	49.92	-	-	74	-24.08	360	101	H
3	* 11.519764	43.80	ADR	38.20	0.00	-44.02	37.98	54	-16.02	-	-	360	101	H
5	* 15.854630	54.08	PK-U	41.20	0.00	-41.94	53.34	-	-	74	-20.66	360	101	H
5	* 15.861581	42.50	ADR	41.20	0.00	-41.82	41.88	54	-12.12	-	-	360	101	H
4	* 11.495963	55.52	PK-U	38.20	0.00	-44.48	49.24	-	-	74	-24.76	360	101	V
4	* 11.502207	44.01	ADR	38.20	0.00	-44.46	37.75	54	-16.25	-	-	360	101	V
6	* 15.855380	54.50	PK-U	41.20	0.00	-41.91	53.79	-	-	74	-20.21	360	101	V
6	* 15.862975	42.80	ADR	41.20	0.00	-41.78	42.22	54	-11.78	-	-	360	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

STATE B**1.1.37. 802.11n/ac SISO MODE IN UNII-1 BAND – BANDEDGE****20MHz**

UNII-1 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filt/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
HT20	5180	6	* 5.150000	68.92	Pk	34.40	0.00	-38.60	64.72	-	-	74	-9.28	336	260	H
			* 5.149307	72.61	Pk	34.40	0.00	-38.60	68.41	-	-	74	-5.59	336	260	H
			* 5.150000	53.45	RMS	34.40	0.00	-38.60	49.25	54	-4.75	-	-	336	260	H
			* 5.149862	54.74	RMS	34.40	0.00	-38.60	50.54	54	-3.46	-	-	336	260	H
			* 5.150000	63.07	Pk	34.40	0.00	-38.60	58.87	-	-	74	-15.13	30	210	V
			* 5.149335	64.36	Pk	34.40	0.00	-38.60	60.16	-	-	74	-13.84	30	210	V
		5	* 5.150000	48.37	RMS	34.40	0.00	-38.60	44.17	54	-9.83	-	-	30	210	V
			* 5.149723	49.39	RMS	34.40	0.00	-38.60	45.19	54	-8.81	-	-	30	210	V
			* 5.150000	72.30	Pk	34.40	0.00	-38.60	68.10	-	-	74	-5.90	143	153	H
			* 5.149085	73.08	Pk	34.40	0.00	-38.60	68.88	-	-	74	-5.12	143	153	H
			* 5.150000	55.03	RMS	34.40	0.00	-38.60	50.83	54	-3.17	-	-	143	153	H
			* 5.149751	54.98	RMS	34.40	0.00	-38.60	50.78	54	-3.22	-	-	143	153	H
			* 5.150000	63.13	Pk	34.40	0.00	-38.60	58.93	-	-	74	-15.07	241	144	V
			* 5.148946	64.65	Pk	34.40	0.00	-38.60	60.45	-	-	74	-13.55	241	144	V
			* 5.150000	49.00	RMS	34.40	0.00	-38.60	44.80	54	-9.20	-	-	241	144	V
			* 5.149362	49.90	RMS	34.40	0.00	-38.60	45.70	54	-8.30	-	-	241	144	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

40MHz

UNII-1 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filt/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
HT40	5190	6	* 5.150000	69.55	Pk	34.40	0.00	-38.60	65.35	-	-	74	-8.65	165	203	H
			* 5.149196	72.96	Pk	34.40	0.00	-38.60	68.76	-	-	74	-5.24	165	203	H
			* 5.150000	54.93	RMS	34.40	0.00	-38.60	50.73	54	-3.27	-	-	165	203	H
			* 5.149890	54.50	RMS	34.40	0.00	-38.60	50.30	54	-3.70	-	-	165	203	H
			* 5.150000	61.43	Pk	34.40	0.00	-38.60	57.23	-	-	74	-16.77	204	219	V
			* 5.149335	65.37	Pk	34.40	0.00	-38.60	61.17	-	-	74	-12.83	204	219	V
		5	* 5.150000	48.12	RMS	34.40	0.00	-38.60	43.92	54	-10.08	-	-	204	219	V
			* 5.148473	49.49	RMS	34.40	0.00	-38.60	45.29	54	-8.71	-	-	204	219	V
			* 5.150000	71.02	Pk	34.40	0.00	-38.60	66.82	-	-	74	-7.18	154	136	H
			* 5.145696	73.65	Pk	34.40	0.00	-38.73	69.32	-	-	74	-4.68	154	136	H
			* 5.150000	53.01	RMS	34.40	0.00	-38.60	48.81	54	-5.19	-	-	154	136	H
			* 5.149835	54.55	RMS	34.40	0.00	-38.60	50.35	54	-3.65	-	-	154	136	H
			* 5.150000	62.21	Pk	34.40	0.00	-38.60	58.01	-	-	74	-15.99	239	204	V
			* 5.148835	63.97	Pk	34.40	0.00	-38.60	59.77	-	-	74	-14.23	239	204	V
			* 5.150000	48.59	RMS	34.40	0.00	-38.60	44.39	54	-9.61	-	-	239	204	V
			* 5.148723	49.02	RMS	34.40	0.00	-38.60	44.82	54	-9.18	-	-	239	204	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

80MHz

UNII-1 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
VHT80	5210	6	* 5.150000	66.08	Pk	34.40	0.00	-34.40	66.08	-	-	74	-7.92	176	158	H
			* 5.148769	68.65	Pk	34.40	0.00	-34.40	68.65	-	-	74	-5.35	176	158	H
			* 5.150000	48.03	RMS	34.40	0.00	-34.40	48.03	54	-5.97	-	-	176	158	H
			* 5.148738	49.84	RMS	34.40	0.00	-34.40	49.84	54	-4.16	-	-	176	158	H
			* 5.150000	56.96	Pk	34.40	0.00	-34.40	56.96	-	-	74	-17.04	246	215	V
			* 5.149832	60.18	Pk	34.40	0.00	-34.40	60.18	-	-	74	-13.82	246	215	V
			* 5.150000	42.93	RMS	34.40	0.00	-34.40	42.93	54	-11.07	-	-	246	215	V
			* 5.148050	43.97	RMS	34.40	0.00	-34.40	43.97	54	-10.03	-	-	246	215	V
		5	* 5.150000	71.77	Pk	34.40	0.00	-38.60	67.57	-	-	74	-6.43	154	159	H
			* 5.149196	72.87	Pk	34.40	0.00	-38.60	68.67	-	-	74	-5.33	154	159	H
			* 5.150000	53.65	RMS	34.40	0.00	-38.60	49.45	54	-4.55	-	-	154	159	H
			* 5.147723	55.03	RMS	34.40	0.00	-38.63	50.80	54	-3.20	-	-	154	159	H
			* 5.150000	63.99	Pk	34.40	0.00	-38.60	59.79	-	-	74	-14.21	243	146	V
			* 5.148529	65.77	Pk	34.40	0.00	-38.60	61.57	-	-	74	-12.43	243	146	V
			* 5.150000	49.37	RMS	34.40	0.00	-38.60	45.17	54	-8.83	-	-	243	146	V
			* 5.149529	50.04	RMS	34.40	0.00	-38.60	45.84	54	-8.16	-	-	243	146	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

160MHz

UNII-1 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
VHT160	5250 (Straddle)	6	* 5.150000	61.31	Pk	34.40	0.00	-34.40	61.31	-	-	74	-12.69	189	150	H
			* 5.120297	69.22	Pk	34.40	0.00	-34.40	69.22	-	-	74	-4.78	189	150	H
			* 5.150000	43.73	RMS	34.40	0.10	-34.40	43.83	54	-10.17	-	-	189	150	H
			* 5.117953	47.99	RMS	34.40	0.10	-34.40	48.09	54	-5.91	-	-	189	150	H
			* 5.150000	53.75	Pk	34.40	0.00	-34.40	53.75	-	-	74	-20.25	260	175	V
			* 5.118453	59.51	Pk	34.40	0.00	-34.40	59.51	-	-	74	-14.49	260	175	V
			* 5.150000	41.65	RMS	34.40	0.10	-34.40	41.75	54	-12.25	-	-	260	175	V
			* 5.120140	43.20	RMS	34.40	0.10	-34.40	43.30	54	-10.7	-	-	260	175	V
		5	* 5.150000	60.89	Pk	34.40	0.00	-34.40	60.89	-	-	74	-13.11	192	165	H
			* 5.122172	68.77	Pk	34.40	0.00	-34.40	68.77	-	-	74	-5.23	192	165	H
			* 5.150000	44.34	RMS	34.40	0.10	-34.40	44.44	54	-9.56	-	-	192	165	H
			* 5.118390	46.99	RMS	34.40	0.10	-34.40	47.09	54	-6.91	-	-	192	165	H
			* 5.150000	54.97	Pk	34.40	0.00	-34.40	54.97	-	-	74	-19.03	266	145	V
			* 5.122203	61.75	Pk	34.40	0.00	-34.40	61.75	-	-	74	-12.25	266	145	V
			* 5.150000	43.06	RMS	34.40	0.10	-34.40	43.16	54	-10.84	-	-	266	145	V
			* 5.118953	43.71	RMS	34.40	0.10	-34.40	43.81	54	-10.19	-	-	266	145	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.38. 802.11n/ac MIMO MODE IN UNII-1 BAND – BANDEDGE

UNII-1 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cb/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
HT20	5180	6+5	* 5.150000	71.76	Pk	34.40	0.00	-38.60	67.56	-	-	74	-6.44	148	114	H
			* 5.145585	72.74	Pk	34.40	0.00	-38.74	68.40	-	-	74	-5.60	148	114	H
			* 5.150000	54.99	RMS	34.40	0.00	-38.60	50.79	54	-3.21	-	-	148	114	H
			* 5.149862	55.33	RMS	34.40	0.00	-38.60	51.13	54	-2.87	-	-	148	114	H
			* 5.150000	64.95	Pk	34.40	0.00	-38.60	60.75	-	-	74	-13.25	202	101	V
			* 5.149585	66.41	Pk	34.40	0.00	-38.60	62.21	-	-	74	-11.79	202	101	V
			* 5.150000	49.76	RMS	34.40	0.00	-38.60	45.56	54	-8.44	-	-	202	101	V
			* 5.149529	50.60	RMS	34.40	0.00	-38.60	46.40	54	-7.60	-	-	202	101	V
HT40	5190	6+5	* 5.150000	65.41	Pk	34.10	0.00	-30.80	68.71	-	-	74	-5.29	327	186	H
			* 5.146019	66.11	Pk	34.10	0.00	-30.90	69.31	-	-	74	-4.69	327	186	H
			* 5.150000	46.78	RMS	34.10	0.00	-30.80	50.08	54.00	-3.92	-	-	327	186	H
			* 5.145456	47.20	RMS	34.10	0.00	-30.80	50.50	54.00	-3.5	-	-	327	186	H
			* 5.150000	53.63	Pk	34.10	0.00	-30.80	56.93	-	-	74	-17.07	20	204	V
			* 5.149207	56.82	Pk	34.10	0.00	-30.80	60.12	-	-	74	-13.88	20	204	V
			* 5.150000	40.90	RMS	34.10	0.00	-30.80	44.20	54.00	-9.8	-	-	20	204	V
			* 5.148425	42.11	RMS	34.10	0.00	-30.90	45.31	54.00	-8.69	-	-	20	204	V
VHT80	5210	6+5	* 5.150000	62.41	Pk	34.30	0.00	-32.62	64.09	-	-	74	-9.91	273	172	H
			* 5.148723	66.84	Pk	34.30	0.00	-32.63	68.51	-	-	74	-5.49	273	172	H
			* 5.150000	47.59	RMS	34.30	0.00	-32.62	49.27	54	-4.73	-	-	273	172	H
			* 5.148473	48.99	RMS	34.30	0.00	-32.63	50.66	54	-3.34	-	-	273	172	H
			* 5.150000	64.35	Pk	34.30	0.00	-32.62	66.03	-	-	74	-7.97	210	183	V
			* 5.149585	65.95	Pk	34.30	0.00	-32.62	67.63	-	-	74	-6.37	210	183	V
			* 5.150000	47.63	RMS	34.30	0.00	-32.62	49.31	54	-4.69	-	-	210	183	V
			* 5.144890	48.17	RMS	34.30	0.00	-32.65	49.82	54	-4.18	-	-	210	183	V
VHT160	5250 (Straddle)	6+5	* 5.150000	59.57	Pk	34.20	0.00	-32.70	61.07	-	-	74	-12.93	316	201	H
			* 5.120640	67.91	Pk	34.10	0.00	-32.69	69.32	-	-	74	-4.68	316	201	H
			* 5.150000	46.58	RMS	34.20	0.10	-32.70	48.18	54	-5.82	-	-	316	201	H
			* 5.120834	49.01	RMS	34.10	0.10	-32.70	50.51	54	-3.49	-	-	316	201	H
			* 5.150000	54.27	Pk	34.20	0.00	-32.70	55.77	-	-	74	-18.23	8	150	V
			* 5.122001	63.38	Pk	34.10	0.00	-32.71	64.77	-	-	74	-9.23	8	150	V
			* 5.150000	43.96	RMS	34.20	0.10	-32.70	45.56	54	-8.44	-	-	8	150	V
			* 5.122557	45.99	RMS	34.10	0.10	-32.71	47.48	54	-6.52	-	-	8	150	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.39. 802.11be SISO SU MODE IN UNII-1 BAND – BANDEDGE**20MHz**

UNII-1 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filt/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 SU Mode	5180	6	* 5.150000	65.44	Pk	34.30	0.00	-32.62	67.12	-	-	74	-6.88	158	197	H
			* 5.148751	66.39	Pk	34.30	0.00	-32.62	68.07	-	-	74	-5.93	158	197	H
			* 5.150000	47.48	RMS	34.30	0.00	-32.62	49.16	54	-4.84	-	-	158	197	H
			* 5.149862	49.15	RMS	34.30	0.00	-32.62	50.83	54	-3.17	-	-	158	197	H
			* 5.150000	55.27	Pk	34.30	0.00	-32.62	56.95	-	-	74	-17.05	256	191	V
			* 5.008222	57.91	Pk	34.30	0.00	-32.65	59.56	-	-	74	-14.44	256	191	V
		5	* 5.150000	43.20	RMS	34.30	0.00	-32.62	44.88	54	-9.12	-	-	256	191	V
			* 5.001944	45.88	RMS	34.40	0.00	-32.66	47.62	54	-6.38	-	-	256	191	V
			* 5.150000	64.10	Pk	34.20	0.00	-32.70	65.60	-	-	74	-8.40	141	215	H
			* 5.148501	65.66	Pk	34.20	0.00	-32.68	67.18	-	-	74	-6.82	141	215	H
			* 5.150000	48.96	RMS	34.20	0.00	-32.70	50.46	54	-3.54	-	-	141	215	H
			* 5.149807	49.36	RMS	34.20	0.00	-32.70	50.86	54	-3.14	-	-	141	215	H
			* 5.150000	55.27	Pk	34.20	0.00	-32.70	56.77	-	-	74	-17.23	165	164	V
			* 5.149223	57.74	Pk	34.20	0.00	-32.69	59.25	-	-	74	-14.75	165	164	V
			* 5.150000	44.07	RMS	34.20	0.00	-32.70	45.57	54	-8.43	-	-	165	164	V
			* 5.004278	45.40	RMS	34.00	0.00	-32.67	46.73	54	-7.27	-	-	165	164	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

40MHz

UNII-1 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filt/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT40 SU Mode	5190	6	* 5.150000	48.95	Pk	34.10	0.00	-17.60	65.45	-	-	74	-8.55	341	201	H
			* 5.148800	52.00	Pk	34.10	0.00	-17.50	68.60	-	-	74	-5.40	341	201	H
			* 5.150000	32.18	RMS	34.10	0.00	-17.60	48.68	54	-5.32	-	-	341	201	H
			* 5.148863	34.04	RMS	34.10	0.00	-17.50	50.64	54	-3.36	-	-	341	201	H
			* 5.150000	42.06	Pk	34.10	0.00	-17.60	58.56	-	-	74	-15.44	37	190	V
			* 5.149863	45.01	Pk	34.10	0.00	-17.60	61.51	-	-	74	-12.49	37	190	V
		5	* 5.150000	28.73	RMS	34.10	0.00	-17.60	45.23	54	-8.77	-	-	37	190	V
			* 5.004063	29.46	RMS	34.00	0.00	-17.20	46.26	54	-7.74	-	-	37	190	V
			* 5.150000	66.15	Pk	34.20	0.00	-32.70	67.65	-	-	74	-6.35	319	160	H
			* 5.149890	67.65	Pk	34.20	0.00	-32.70	69.15	-	-	74	-4.85	319	160	H
			* 5.150000	47.70	RMS	34.20	0.00	-32.70	49.20	54	-4.80	-	-	319	160	H
			* 5.149279	49.12	RMS	34.20	0.00	-32.69	50.63	54	-3.37	-	-	319	160	H
			* 5.150000	54.71	Pk	34.20	0.00	-32.70	56.21	-	-	74	-17.79	319	160	V
			* 5.149112	58.10	Pk	34.20	0.00	-32.69	59.61	-	-	74	-14.39	319	160	V
			* 5.150000	43.68	RMS	34.20	0.00	-32.70	45.18	54	-8.82	-	-	319	160	V
			* 5.005306	45.32	RMS	34.00	0.00	-32.67	46.65	54	-7.35	-	-	319	160	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

80MHz

UNII-1 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT80 SU Mode	5210	6	* 5.150000	50.06	Pk	34.10	0.00	-17.60	66.56	-	-	74	-7.44	327	181	H
			* 5.144018	50.87	Pk	34.10	0.00	-17.60	67.37	-	-	74	-6.63	327	181	H
			* 5.150000	33.24	RMS	34.10	0.00	-17.60	49.74	54	-4.26	-	-	327	181	H
			* 5.149207	33.96	RMS	34.10	0.00	-17.50	50.56	54	-3.44	-	-	327	181	H
			* 5.150000	43.07	Pk	34.10	0.00	-17.60	59.57	-	-	74	-14.43	25	104	V
			* 5.149175	44.88	Pk	34.10	0.00	-17.50	61.48	-	-	74	-12.52	25	104	V
		5	* 5.150000	29.31	RMS	34.10	0.00	-17.60	45.81	54	-8.19	-	-	25	104	V
			* 5.149082	30.28	RMS	34.10	0.00	-17.50	46.88	54	-7.12	-	-	25	104	V
			* 5.150000	69.20	Pk	34.30	0.00	-35.53	67.97	-	-	74	-6.03	328	156	H
			* 5.148029	70.09	Pk	34.30	0.00	-35.52	68.87	-	-	74	-5.13	328	156	H
			* 5.150000	49.73	RMS	34.30	0.00	-35.53	48.50	54	-5.50	-	-	328	156	H
			* 5.149751	50.08	RMS	34.30	0.00	-35.53	48.85	54	-5.15	-	-	328	156	H
			* 5.150000	63.73	Pk	34.30	0.00	-35.53	62.50	-	-	74	-11.50	14	128	V
			* 5.149640	65.45	Pk	34.30	0.00	-35.53	64.22	-	-	74	-9.78	14	128	V
			* 5.150000	47.21	RMS	34.30	0.00	-35.53	45.98	54	-8.02	-	-	14	128	V
			* 5.148807	48.11	RMS	34.30	0.00	-35.52	46.89	54	-7.11	-	-	14	128	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

160MHz

UNII-1 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT160 SU Mode	5250 (Straddle)	6	* 5.150000	64.49	Pk	34.40	0.00	-35.40	63.49	-	-	74	-10.51	79	210	H
			* 5.125779	68.12	Pk	34.40	0.00	-35.50	67.02	-	-	74	-6.98	79	210	H
			* 5.150000	50.42	RMS	34.40	0.14	-35.40	49.56	54	-4.44	-	-	79	210	H
			* 5.148501	51.79	RMS	34.40	0.14	-35.40	50.93	54	-3.07	-	-	79	210	H
			* 5.150000	57.98	Pk	34.40	0.00	-35.40	56.98	-	-	74	-17.02	96	121	V
			* 5.139057	62.54	Pk	34.40	0.00	-35.50	61.44	-	-	74	-12.56	96	121	V
		5	* 5.150000	46.46	RMS	34.40	0.14	-35.40	45.60	54	-8.40	-	-	96	121	V
			* 5.149723	47.29	RMS	34.40	0.14	-35.40	46.43	54	-7.57	-	-	96	121	V
			* 5.150000	67.06	Pk	34.40	0.00	-35.40	66.06	-	-	74	-7.94	252	160	H
			* 5.144473	70.16	Pk	34.40	0.00	-35.30	69.26	-	-	74	-4.74	252	160	H
			* 5.150000	46.56	RMS	34.40	0.14	-35.40	45.70	54	-8.30	-	-	252	160	H
			* 5.124612	49.94	RMS	34.40	0.14	-35.50	48.98	54	-5.02	-	-	252	160	H
			* 5.150000	59.03	Pk	34.40	0.00	-35.40	58.03	-	-	74	-15.97	307	108	V
			* 5.129057	63.80	Pk	34.40	0.00	-35.50	62.70	-	-	74	-11.30	307	108	V
			* 5.150000	45.26	RMS	34.40	0.14	-35.40	44.40	54	-9.60	-	-	307	108	V
			* 5.124362	46.08	RMS	34.40	0.00	-35.40	45.08	54	-8.92	-	-	307	108	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.40. 802.11be SISO PARTIAL RU MODE IN UNII-1 BAND – BANDEDGE

UNII-1 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filt/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 26T - RU0	5180	6	* 5.150000	61.17	Pk	34.40	0.00	-36.02	59.55	-	-	74	-14.45	299	195	H
			* 5.148501	64.07	Pk	34.40	0.00	-36.03	62.44	-	-	74	-11.56	299	195	H
			* 5.150000	45.02	RMS	34.40	0.00	-36.02	43.40	54	-10.60	-	-	299	195	H
			* 5.149501	46.72	RMS	34.40	0.00	-36.03	45.09	54	-8.91	-	-	299	195	H
			* 5.150000	56.95	Pk	34.40	0.00	-36.02	55.33	-	-	74	-18.67	317	140	V
			* 5.148473	58.35	Pk	34.40	0.00	-36.03	56.72	-	-	74	-17.28	317	140	V
			* 5.150000	45.09	RMS	34.40	0.00	-36.02	43.47	54	-10.53	-	-	317	140	V
			* 5.119973	46.10	RMS	34.40	0.00	-36.14	44.36	54	-9.64	-	-	317	140	V
			* 5.150000	59.61	Pk	34.40	0.00	-36.02	57.99	-	-	74	-16.01	276	156	H
			* 5.148057	64.32	Pk	34.40	0.00	-36.03	62.69	-	-	74	-11.31	276	156	H
		5	* 5.150000	45.72	RMS	34.40	0.00	-36.02	44.10	54	-9.90	-	-	276	156	H
			* 5.146585	46.67	RMS	34.40	0.00	-36.04	45.03	54	-8.97	-	-	276	156	H
			* 5.150000	55.48	Pk	34.40	0.00	-36.02	53.86	-	-	74	-20.14	9	216	V
			* 5.148612	60.27	Pk	34.40	0.00	-36.03	58.64	-	-	74	-15.36	9	216	V
			* 5.150000	45.62	RMS	34.40	0.00	-36.02	44.00	54	-10.00	-	-	9	216	V
			* 5.146390	46.29	RMS	34.40	0.00	-36.04	44.65	54	-9.35	-	-	9	216	V
EHT80 484+484+ 242T - RU93	5210	6	* 5.150000	70.10	Pk	34.40	0.00	-36.02	68.48	-	-	74	-5.52	286	180	H
			* 5.147057	70.52	Pk	34.40	0.00	-36.03	68.89	-	-	74	-5.11	286	180	H
			* 5.150000	48.39	RMS	34.40	0.00	-36.02	46.77	54	-7.23	-	-	286	180	H
			* 5.147251	51.80	RMS	34.40	0.00	-36.03	50.17	54	-3.83	-	-	286	180	H
			* 5.150000	60.77	Pk	34.40	0.00	-36.02	59.15	-	-	74	-14.85	316	165	V
			* 5.143946	62.84	Pk	34.40	0.00	-36.05	61.19	-	-	74	-12.81	316	165	V
			* 5.150000	45.90	RMS	34.40	0.00	-36.02	44.28	54	-9.72	-	-	316	165	V
			* 5.140807	46.55	RMS	34.40	0.00	-36.06	44.89	54	-9.11	-	-	316	165	V
		5	* 5.150000	70.93	Pk	34.30	0.00	-37.11	68.12	-	-	74	-5.88	288	259	H
			* 5.149807	71.55	Pk	34.30	0.00	-37.11	68.74	-	-	74	-5.26	288	259	H
			* 5.150000	52.49	RMS	34.30	0.00	-37.11	49.68	54	-4.32	-	-	288	259	H
			* 5.149223	53.51	RMS	34.30	0.00	-37.10	50.71	54	-3.29	-	-	288	259	H
			* 5.150000	63.43	Pk	34.30	0.00	-37.11	60.62	-	-	74	-13.38	3	258	V
			* 5.143807	64.85	Pk	34.30	0.00	-37.14	62.01	-	-	74	-11.99	3	258	V
			* 5.150000	47.76	RMS	34.30	0.00	-37.11	44.95	54	-9.05	-	-	3	258	V
			* 5.147918	48.80	RMS	34.30	0.00	-37.11	45.99	54	-8.01	-	-	3	258	V
EHT160 996+484+ 242T - S99	5250 (straddle)	6	* 5.150000	66.88	Pk	34.70	0.00	-38.61	62.97	-	-	74	-11.03	35	205	H
			* 5.137140	73.19	Pk	34.60	0.00	-38.65	69.14	-	-	74	-4.86	35	205	H
			* 5.150000	51.82	RMS	34.70	0.00	-38.61	47.91	54	-6.09	-	-	35	205	H
			* 5.135834	53.48	RMS	34.60	0.00	-38.65	49.43	54	-4.57	-	-	35	205	H
			* 5.150000	67.60	Pk	34.70	0.00	-38.61	63.69	-	-	74	-10.31	310	152	V
			* 5.137584	73.47	Pk	34.60	0.00	-38.65	69.42	-	-	74	-4.58	310	152	V
			* 5.150000	52.40	RMS	34.70	0.00	-38.61	48.49	54	-5.51	-	-	310	152	V
			* 5.136612	53.53	RMS	34.60	0.00	-38.65	49.48	54	-4.52	-	-	310	152	V
		5	* 5.150000	64.12	Pk	34.30	0.00	-35.53	62.89	-	-	74	-11.11	324	153	H
			* 5.137779	70.48	Pk	34.30	0.00	-35.55	69.23	-	-	74	-4.77	324	153	H
			* 5.150000	48.72	RMS	34.30	0.00	-35.53	47.49	54	-6.51	-	-	324	153	H
			* 5.136807	50.38	RMS	34.30	0.00	-35.55	49.13	54	-4.87	-	-	324	153	H
			* 5.150000	59.56	Pk	34.30	0.00	-35.53	58.33	-	-	74	-15.67	63	181	V
			* 5.135807	62.97	Pk	34.30	0.00	-35.56	61.71	-	-	74	-12.29	63	181	V
			* 5.150000	46.57	RMS	34.30	0.00	-35.53	45.34	54	-8.66	-	-	63	181	V
			* 5.148973	46.98	RMS	34.30	0.00	-35.52	45.76	54	-8.24	-	-	63	181	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.41. 802.11be MIMO SU MODE IN UNII-1 BAND – BANDEDGE

UNII-1 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filtr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 SU Mode	5180	6+5	* 5.150000	66.49	Pk	34.40	0.00	-36.02	64.87	-	-	74	-9.13	284	182	H
			* 5.149696	70.34	Pk	34.40	0.00	-36.02	68.72	-	-	74	-5.28	284	182	H
			* 5.150000	51.27	RMS	34.40	0.00	-36.02	49.65	54	-4.35	-	-	284	182	H
			* 5.149890	51.98	RMS	34.40	0.00	-36.02	50.36	54	-3.64	-	-	284	182	H
			* 5.150000	57.44	Pk	34.40	0.00	-36.02	55.82	-	-	74	-18.18	352	148	V
			* 5.149696	60.31	Pk	34.40	0.00	-36.02	58.69	-	-	74	-15.31	352	148	V
			* 5.150000	45.78	RMS	34.40	0.00	-36.02	44.16	54	-9.84	-	-	352	148	V
			* 5.149751	46.37	RMS	34.40	0.00	-36.02	44.75	54	-9.25	-	-	352	148	V
EHT40 SU Mode	5190	6+5	* 5.150000	71.37	Pk	34.00	0.00	-38.10	67.27	-	-	74	-6.73	330	172	H
			* 5.149696	73.34	Pk	34.00	0.00	-38.10	69.24	-	-	74	-4.76	330	172	H
			* 5.150000	53.16	RMS	34.00	0.00	-38.10	49.06	54	-4.94	-	-	330	172	H
			* 5.149973	53.96	RMS	34.00	0.00	-38.10	49.86	54	-4.14	-	-	330	172	H
			* 5.150000	59.57	Pk	34.00	0.00	-38.10	55.47	-	-	74	-18.53	351	113	V
			* 5.149335	62.53	Pk	34.00	0.00	-38.10	58.43	-	-	74	-15.57	351	113	V
			* 5.150000	47.73	RMS	34.00	0.00	-38.10	43.63	54	-10.37	-	-	351	113	V
			* 5.149835	48.43	RMS	34.00	0.00	-38.10	44.33	54	-9.67	-	-	351	113	V
EHT80 SU Mode	5210	6+5	* 5.150000	60.53	Pk	34.10	0.00	-30.80	63.83	-	-	74	-10.17	327	174	H
			* 5.146831	63.73	Pk	34.10	0.00	-30.80	67.03	-	-	74	-6.97	327	174	H
			* 5.150000	46.28	RMS	34.10	0.00	-30.80	49.58	54	-4.42	-	-	327	174	H
			* 5.145456	47.41	RMS	34.10	0.00	-30.80	50.71	54	-3.29	-	-	327	174	H
			* 5.150000	54.50	Pk	34.10	0.00	-30.80	57.80	-	-	74	-16.20	40	158	V
			* 5.144175	57.18	Pk	34.10	0.00	-30.90	60.38	-	-	74	-13.62	40	158	V
			* 5.150000	41.71	RMS	34.10	0.00	-30.80	45.01	54	-8.99	-	-	40	158	V
			* 5.138768	42.20	RMS	34.10	0.00	-30.90	45.40	54	-8.60	-	-	40	158	V
EHT160 SU Mode	5250 (Straddle)	6+5	* 5.150000	70.34	Pk	34.50	0.00	-37.62	67.22	-	-	74	-6.78	242	174	H
			* 5.138807	70.32	Pk	34.50	0.00	-37.64	67.18	-	-	74	-6.82	242	174	H
			* 5.150000	52.78	RMS	34.50	0.14	-37.62	49.80	54	-4.20	-	-	242	174	H
			* 5.148973	54.12	RMS	34.50	0.14	-37.61	51.15	54	-2.85	-	-	242	174	H
			* 5.150000	65.27	Pk	34.50	0.00	-37.62	62.15	-	-	74	-11.85	161	122	V
			* 5.125501	70.21	Pk	34.50	0.00	-37.61	67.10	-	-	74	-6.90	161	122	V
			* 5.150000	51.67	RMS	34.50	0.14	-37.62	48.69	54	-5.31	-	-	161	122	V
			* 5.146196	53.20	RMS	34.50	0.14	-37.56	50.28	54	-3.72	-	-	161	122	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

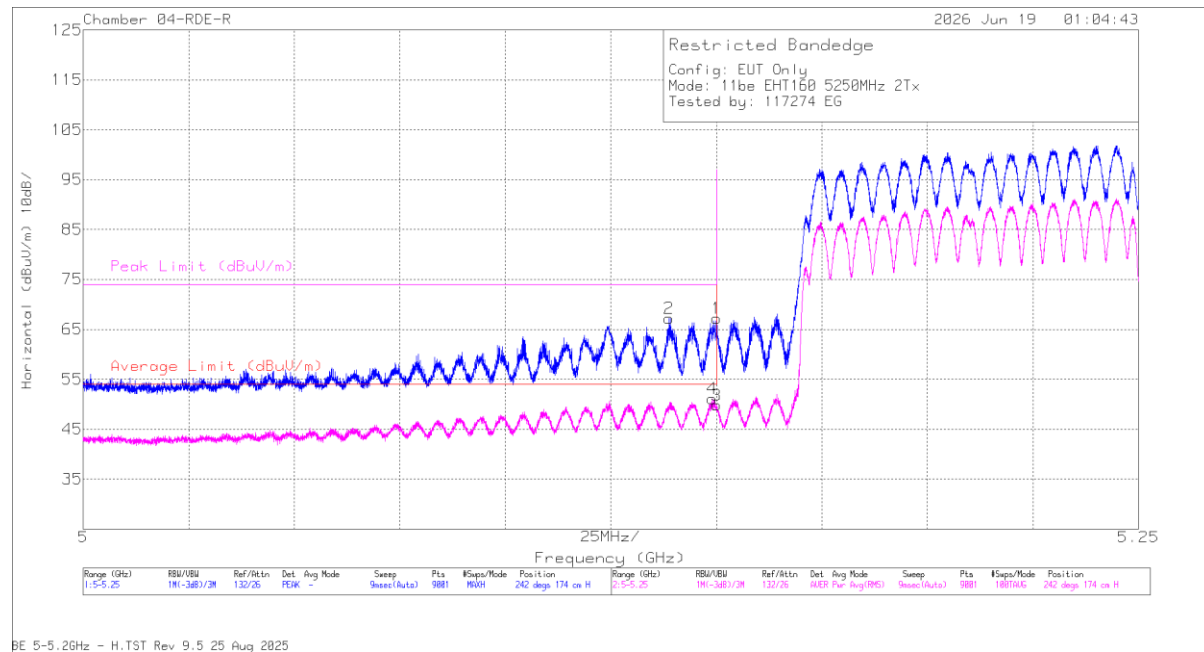
1.1.42. 802.11be MIMO PARTIAL RU MODE IN UNII-1 BAND – BANDEDGE

UNII-1 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filt/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 26T - RU0	5180	6+5	* 5.150000	61.74	Pk	34.40	0.00	-36.02	60.12	-	-	74	-13.88	284	182	H
			* 5.148112	63.92	Pk	34.40	0.00	-36.03	62.29	-	-	74	-11.71	284	182	H
			* 5.150000	46.36	RMS	34.40	0.00	-36.02	44.74	54	-9.26	-	-	284	182	H
			* 5.144390	46.69	RMS	34.40	0.00	-36.04	45.05	54	-8.95	-	-	284	182	H
			* 5.150000	55.74	Pk	34.40	0.00	-36.02	54.12	-	-	74	-19.88	352	148	V
			* 5.148446	58.28	Pk	34.40	0.00	-36.03	56.65	-	-	74	-17.35	352	148	V
			* 5.150000	45.18	RMS	34.40	0.00	-36.02	43.56	54	-10.44	-	-	352	148	V
			* 5.145196	46.10	RMS	34.40	0.00	-36.04	44.46	54	-9.54	-	-	352	148	V
EHT80 484+242T - RU93	5210	6+5	* 5.150000	67.36	Pk	34.50	0.00	-37.62	64.24	-	-	74	-9.76	30	160	H
			* 5.147335	71.99	Pk	34.50	0.00	-37.57	68.92	-	-	74	-5.08	30	160	H
			* 5.150000	49.42	RMS	34.50	0.00	-37.62	46.30	54	-7.70	-	-	30	160	H
			* 5.147696	51.88	RMS	34.50	0.00	-37.58	48.80	54	-5.20	-	-	30	160	H
			* 5.150000	70.65	Pk	34.50	0.00	-37.62	67.53	-	-	74	-6.47	320	104	V
			* 5.144196	71.75	Pk	34.50	0.00	-37.57	68.68	-	-	74	-5.32	320	104	V
			* 5.150000	51.73	RMS	34.50	0.00	-37.62	48.61	54	-5.39	-	-	320	104	V
			* 5.149918	53.00	RMS	34.50	0.00	-37.62	49.88	54	-4.12	-	-	320	104	V
EHT160 996+484+ 242T - S99	5250 (Straddle)	6+5	* 5.150000	67.41	Pk	34.40	0.00	-37.80	64.01	-	-	74	-9.99	333	204	H
			* 5.136640	72.06	Pk	34.40	0.00	-38.24	68.22	-	-	74	-5.78	333	204	H
			* 5.150000	51.53	RMS	34.40	0.00	-37.80	48.13	54	-5.87	-	-	333	204	H
			* 5.146390	54.59	RMS	34.40	0.00	-37.90	51.09	54	-2.91	-	-	333	204	H
			* 5.150000	57.91	Pk	34.40	0.00	-37.80	54.51	-	-	74	-19.49	11	153	V
			* 5.136251	63.66	Pk	34.40	0.00	-38.27	59.79	-	-	74	-14.21	11	153	V
			* 5.150000	46.79	RMS	34.40	0.00	-37.80	43.39	54	-10.61	-	-	11	153	V
			* 5.147779	49.09	RMS	34.40	0.00	-37.82	45.67	54	-8.33	-	-	11	153	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

WORST-CASE BANDEDGE (LOW CHANNEL)**802.11be EHT160 / 5250 MHz / 2TX CDD / SU****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBUV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/Filtr/Pad (dB)	Correct Reading (dBUV/m)	Avg Limit (dBUV/m)	Avg Margin (dB)	Pk Limit (dBUV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.150000	70.34	Pk	34.50	0.00	-37.62	67.22	-	-	74	-6.78	242	174	H
2	* 5.138807	70.32	Pk	34.50	0.00	-37.64	67.18	-	-	74	-6.82	242	174	H
3	* 5.150000	52.78	RMS	34.50	0.14	-37.62	49.80	54	-4.2	-	-	242	174	H
4	* 5.148973	54.12	RMS	34.50	0.14	-37.61	51.15	54	-2.85	-	-	242	174	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.43. 802.11n/ac MIMO MODE IN UNII-1 BAND – SPURIOUS EMISSIONS**20MHz**

UNII-1 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fltr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
HT20	5180	6+5	5.759290	42.69	PK-U	35.00	0.00	-23.89	53.80	-	-	68.2	-14.4	360	100	H
			5.768617	42.44	PK-U	35.00	0.00	-23.88	53.56	-	-	68.2	-14.64	360	201	V
			8.530972	56.35	PK-U	36.00	0.00	-45.79	46.56	-	-	68.2	-21.64	360	201	V
			8.540240	56.05	PK-U	36.00	0.00	-45.68	46.37	-	-	68.2	-21.83	360	100	H
			13.485872	56.17	PK-U	38.90	0.00	-43.56	51.51	-	-	68.2	-16.69	360	100	H
	5200		13.513942	55.70	PK-U	38.80	0.00	-43.42	51.08	-	-	68.2	-17.12	360	200	V
			* 7.297478	55.94	PK-U	35.60	0.00	-46.02	45.52	-	-	74	-28.48	360	100	H
			* 7.317025	44.21	ADR	35.60	0.00	-45.95	33.86	54	-20.14	-	-	360	100	H
			* 7.318174	55.90	PK-U	35.60	0.00	-45.97	45.53	-	-	74	-28.47	360	200	V
			* 7.315907	44.03	ADR	35.60	0.00	-45.98	33.65	54	-20.35	-	-	360	200	V
	5240		6.469733	56.38	PK-U	35.60	0.00	-46.40	45.58	-	-	68.2	-22.62	360	201	V
			6.518115	56.99	PK-U	35.60	0.00	-46.34	46.25	-	-	68.2	-21.95	360	100	H
			8.73469	56.38	PK-U	36.20	0.00	-45.43	47.15	-	-	68.2	-21.05	360	100	H
			8.775929	56.33	PK-U	36.20	0.00	-45.63	46.90	-	-	68.2	-21.3	360	200	V
			* 8.055089	55.87	PK-U	35.90	0.00	-45.55	46.22	-	-	74	-27.78	360	100	H
			* 8.060831	44.08	ADR	35.90	0.00	-45.62	34.36	54	-19.64	-	-	360	201	V
			* 8.061678	44.29	ADR	35.90	0.00	-45.63	34.56	54	-19.44	-	-	360	100	H
			* 8.06464	56.25	PK-U	35.90	0.00	-45.60	46.55	-	-	74	-27.45	360	201	V
			10.231247	57.01	PK-U	37.80	0.00	-44.99	49.82	-	-	68.2	-18.38	360	100	H
			10.268672	57.17	PK-U	37.80	0.00	-45.39	49.58	-	-	68.2	-18.62	360	200	V
			14.781359	57.29	PK-U	39.80	0.00	-42.92	54.17	-	-	68.2	-14.03	360	200	V
			14.786984	56.94	PK-U	39.80	0.00	-42.71	54.03	-	-	68.2	-14.17	360	100	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

40MHz

UNII-1 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filt/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
HT40	5190	6+5	* 12.015017	42.34	ADR	39.00	0.00	-41.70	39.64	54	-14.36	-	-	360	101	V
			* 12.028999	53.66	PK-U	39.00	0.00	-41.70	50.96	-	-	74	-23.04	360	101	H
			* 12.029386	54.21	PK-U	39.00	0.00	-41.74	51.47	-	-	74	-22.53	360	101	V
			* 12.04439	41.86	ADR	39.00	0.00	-41.74	39.12	54	-14.88	-	-	360	101	H
			* 2.336675	58.17	PK-U	31.90	0.00	-47.00	43.07	-	-	74	-30.93	360	101	H
			* 2.339282	46.47	ADR	31.90	0.00	-47.03	31.34	54	-22.66	-	-	360	200	V
			* 2.339755	58.26	PK-U	31.90	0.00	-47.08	43.08	-	-	74	-30.92	360	200	V
			* 2.339895	46.43	ADR	31.90	0.00	-47.09	31.24	54	-22.76	-	-	360	101	H
			* 7.280594	42.40	ADR	35.50	0.00	-43.96	33.94	54	-20.06	-	-	360	200	V
			* 7.283963	54.62	PK-U	35.50	0.00	-43.90	46.22	-	-	74	-27.78	360	200	V
			* 7.287763	42.50	ADR	35.60	0.00	-43.88	34.22	54	-19.78	-	-	360	200	H
			* 7.295958	54.13	PK-U	35.60	0.00	-43.80	45.93	-	-	74	-28.07	360	200	H
	5230		* 15.707934	42.46	ADR	40.40	0.00	-42.69	40.17	54	-13.83	-	-	360	101	H
			* 15.713605	53.76	PK-U	40.50	0.00	-42.70	51.56	-	-	74	-22.44	360	101	H
			* 15.734537	42.78	ADR	40.40	0.00	-41.95	41.23	54	-12.77	-	-	360	101	V
			* 15.735248	54.95	PK-U	40.40	0.00	-41.92	53.43	-	-	74	-20.57	360	101	V
			* 2.68223	58.22	PK-U	32.20	0.00	-46.82	43.60	-	-	74	-30.4	360	200	V
			* 2.684563	46.39	ADR	32.20	0.00	-46.80	31.79	54	-22.21	-	-	360	200	V
			* 2.685752	58.25	PK-U	32.20	0.00	-46.80	43.65	-	-	74	-30.35	360	200	H
			* 2.722859	46.11	ADR	32.30	0.00	-47.30	31.11	54	-22.89	-	-	360	200	H
			* 8.146377	42.58	ADR	36.10	0.00	-42.90	35.78	54	-18.22	-	-	360	101	V
			* 8.148859	42.18	ADR	36.10	0.00	-42.81	35.47	54	-18.53	-	-	360	200	H
			* 8.160014	54.08	PK-U	36.10	0.00	-42.70	47.48	-	-	74	-26.52	360	200	H
			* 8.174479	54.41	PK-U	36.10	0.00	-42.65	47.86	-	-	74	-26.14	360	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

80MHz

UNII-1 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filtr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
VHT80	5210	6+5	* 12.30338	53.77	PK-U	38.80	0.00	-41.30	51.27	-	-	74	-22.73	2	101	H
			* 12.30518	53.67	PK-U	38.80	0.00	-41.28	51.19	-	-	74	-22.81	2	101	V
			* 12.317722	41.86	ADR	38.80	0.00	-41.10	39.56	54	-14.44	-	-	2	101	V
			* 12.336073	41.74	ADR	38.90	0.00	-40.90	39.74	54	-14.26	-	-	2	101	H
			* 2.794643	46.93	ADR	32.50	0.00	-47.16	32.27	54	-21.73	-	-	2	101	V
			* 2.798283	58.47	PK-U	32.40	0.00	-47.20	43.67	-	-	74	-30.33	2	101	V
			* 2.798803	47.04	ADR	32.40	0.00	-47.20	32.24	54	-21.76	-	-	2	101	H
			* 2.80425	58.56	PK-U	32.50	0.00	-47.30	43.76	-	-	74	-30.24	2	101	H
			* 8.247711	43.11	ADR	36.10	0.00	-42.87	36.34	54	-17.66	-	-	2	101	H
			* 8.251982	43.22	ADR	36.10	0.00	-42.90	36.42	54	-17.58	-	-	2	101	V
			* 8.255093	54.99	PK-U	36.10	0.00	-43.00	48.09	-	-	74	-25.91	2	101	V
			* 8.261351	54.84	PK-U	36.10	0.00	-42.80	48.14	-	-	74	-25.86	2	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

160MHz

UNII-1 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filtr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
VHT160	5250 (Straddle)	6+5	1.909650	58.43	PK-U	31.00	0.00	-46.26	43.17	-	-	68.2	-25.03	360	101	V
			1.920642	57.99	PK-U	31.10	0.00	-46.26	42.83	-	-	68.2	-25.37	360	199	H
			3.133335	56.41	PK-U	33.00	0.00	-46.00	43.41	-	-	68.2	-24.79	360	199	H
			3.159644	56.21	PK-U	33.00	0.00	-45.60	43.61	-	-	68.2	-24.59	360	200	V
			10.015975	54.61	PK-U	37.60	0.00	-42.60	49.61	-	-	68.2	-18.59	360	101	H
			10.042003	55.21	PK-U	37.70	0.00	-42.90	50.01	-	-	68.2	-18.19	360	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.1.44. 802.11be MIMO SU MODE IN UNII-1 BAND – SPURIOUS EMISSIONS

20MHz

UNII-1 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 SU Mode	5180	6+5	1.967919	58.13	PK-U	31.30	0.00	-46.29	43.14	-	-	68.2	-25.06	360	101	V
			1.972078	58.80	PK-U	31.40	0.00	-46.40	43.80	-	-	68.2	-24.4	360	200	H
			3.036560	56.73	PK-U	33.00	0.00	-46.56	43.17	-	-	68.2	-25.03	360	200	H
			3.065653	56.78	PK-U	33.10	0.00	-46.30	43.58	-	-	68.2	-24.62	360	200	V
			10.141780	54.63	PK-U	37.70	0.00	-42.60	49.73	-	-	68.2	-18.47	360	101	H
	5200		10.149930	54.20	PK-U	37.80	0.00	-42.50	49.50	-	-	68.2	-18.7	360	200	V
			1.966095	58.19	PK-U	31.30	0.00	-46.20	43.29	-	-	68.2	-24.91	360	101	V
			1.974125	58.96	PK-U	31.40	0.00	-46.41	43.95	-	-	68.2	-24.25	360	101	H
			3.089755	56.39	PK-U	33.10	0.00	-46.20	43.29	-	-	68.2	-24.91	360	101	V
			3.090972	56.61	PK-U	33.10	0.00	-46.01	43.70	-	-	68.2	-24.5	360	101	H
	5240		10.044808	54.71	PK-U	37.70	0.00	-42.90	49.51	-	-	68.2	-18.69	360	200	V
			10.090164	54.64	PK-U	37.70	0.00	-42.90	49.44	-	-	68.2	-18.76	360	101	H
			1.966266	58.43	PK-U	31.30	0.00	-46.20	43.53	-	-	68.2	-24.67	360	200	H
			1.972557	58.10	PK-U	31.40	0.00	-46.40	43.10	-	-	68.2	-25.1	360	200	V
			3.121839	56.66	PK-U	33.00	0.00	-45.90	43.76	-	-	68.2	-24.44	360	101	H
			3.140330	56.07	PK-U	33.00	0.00	-45.80	43.27	-	-	68.2	-24.93	360	101	V
			9.725113	54.31	PK-U	37.10	0.00	-42.39	49.02	-	-	68.2	-19.18	360	199	V
			9.735793	53.75	PK-U	37.10	0.00	-42.32	48.53	-	-	68.2	-19.67	360	199	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

40MHz

UNII-1 (MIMO CDD)	Channel Frequency MHz	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filt/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT40 SU Mode	5190	6+5	* 12.182432	42.26	ADR	39.00	0.00	-41.24	40.02	54	-13.98	-	-	360	200	H
			* 12.196926	54.67	PK-U	39.00	0.00	-41.49	52.18	-	-	74	-21.82	360	200	H
			* 12.201832	42.19	ADR	38.90	0.00	-41.50	39.59	54	-14.41	-	-	360	200	V
			* 12.206366	54.08	PK-U	38.90	0.00	-41.54	51.44	-	-	74	-22.56	360	200	V
			* 2.790695	47.08	ADR	32.50	0.00	-47.13	32.45	54	-21.55	-	-	360	200	V
			* 2.796719	58.84	PK-U	32.40	0.00	-47.20	44.04	-	-	74	-29.96	360	101	H
			* 2.798832	46.91	ADR	32.40	0.00	-47.20	32.11	54	-21.89	-	-	360	101	H
			* 2.800155	58.48	PK-U	32.40	0.00	-47.18	43.70	-	-	74	-30.3	360	200	V
			* 7.497323	41.93	ADR	35.60	0.00	-42.97	34.56	54	-19.44	-	-	360	101	V
			* 7.506856	54.10	PK-U	35.60	0.00	-43.00	46.70	-	-	74	-27.3	360	101	V
	* 7.525874		42.19	ADR	35.70	0.00	-43.29	34.60	54	-19.4	-	-	360	101	H	
	* 7.533972		53.78	PK-U	35.70	0.00	-43.20	46.28	-	-	74	-27.72	360	101	H	
	5230		2.024858	58.23	PK-U	31.50	0.00	-46.49	43.24	-	-	68.2	-24.96	360	101	V
			2.033125	59.14	PK-U	31.50	0.00	-46.41	44.23	-	-	68.2	-23.97	360	101	H
			3.091704	56.96	PK-U	33.10	0.00	-46.07	43.99	-	-	68.2	-24.21	360	200	V
			3.091871	56.88	PK-U	33.10	0.00	-46.09	43.89	-	-	68.2	-24.31	360	101	H
			10.040927	54.50	PK-U	37.70	0.00	-42.80	49.40	-	-	68.2	-18.8	360	200	V
			10.049730	54.32	PK-U	37.70	0.00	-42.83	49.19	-	-	68.2	-19.01	360	200	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

80MHz

UNII-1 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filtr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT80 SU Mode	5210	6+5	* 15.779706	43.42	ADR	40.40	0.00	-42.50	41.32	54	-12.68	-	-	360	101	H
			* 15.782128	54.77	PK-U	40.40	0.00	-42.30	52.87	-	-	74	-21.13	360	101	H
			* 15.785164	55.55	PK-U	40.40	0.00	-42.12	53.83	-	-	74	-20.17	360	200	V
			* 15.785799	43.48	ADR	40.40	0.00	-42.18	41.70	54	-12.3	-	-	360	200	V
			* 2.790571	46.91	ADR	32.50	0.00	-47.14	32.27	54	-21.73	-	-	360	101	H
			* 2.793306	58.59	PK-U	32.50	0.00	-47.10	43.99	-	-	74	-30.01	360	101	V
			* 2.797666	46.87	ADR	32.40	0.00	-47.20	32.07	54	-21.93	-	-	360	101	V
			* 2.804444	58.48	PK-U	32.50	0.00	-47.30	43.68	-	-	74	-30.32	360	101	H
			* 8.305063	42.91	ADR	36.00	0.00	-42.61	36.30	54	-17.7	-	-	360	200	V
			* 8.308853	43.03	ADR	36.00	0.00	-42.70	36.33	54	-17.67	-	-	360	101	H
			* 8.309792	54.85	PK-U	36.00	0.00	-42.78	48.07	-	-	74	-25.93	360	200	V
			* 8.313556	55.08	PK-U	36.00	0.00	-42.96	48.12	-	-	74	-25.88	360	101	H

160MHz

UNII-1 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filtr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT160 SU Mode	5250	6+5	* 15.686158	43.38	ADR	40.40	0.00	-42.72	41.06	54	-12.94	-	-	2	101	V
			* 15.689547	43.38	ADR	40.40	0.00	-42.81	40.97	54	-13.03	-	-	2	200	H
			* 15.694809	55.14	PK-U	40.40	0.00	-42.80	52.74	-	-	74	-21.26	2	200	H
			* 15.697434	55.40	PK-U	40.40	0.00	-42.74	53.06	-	-	74	-20.94	2	101	V
			* 2.801146	46.94	ADR	32.50	0.00	-47.11	32.33	54	-21.67	-	-	2	200	V
			* 2.805146	46.76	ADR	32.50	0.00	-47.30	31.96	54	-22.04	-	-	2	200	H
			* 2.807646	58.34	PK-U	32.50	0.00	-47.20	43.64	-	-	74	-30.36	2	200	V
			* 2.813719	58.22	PK-U	32.50	0.00	-47.13	43.59	-	-	74	-30.41	2	200	H
			* 8.430828	42.36	ADR	36.00	0.00	-42.80	35.56	54	-18.44	-	-	2	200	V
			* 8.432338	42.23	ADR	36.00	0.00	-42.90	35.33	54	-18.67	-	-	2	101	H
			* 8.434663	54.18	PK-U	36.00	0.00	-42.90	47.28	-	-	74	-26.72	2	200	V
			* 8.444178	54.40	PK-U	36.00	0.00	-42.50	47.90	-	-	74	-26.1	2	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

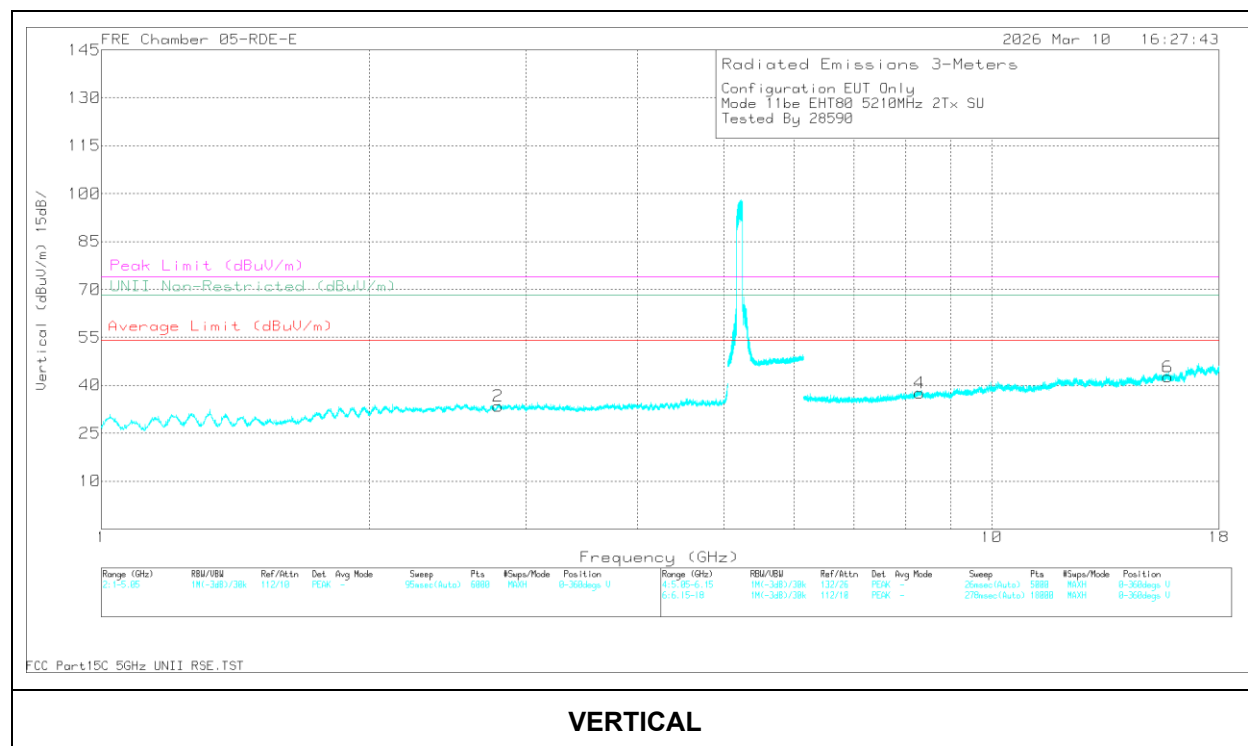
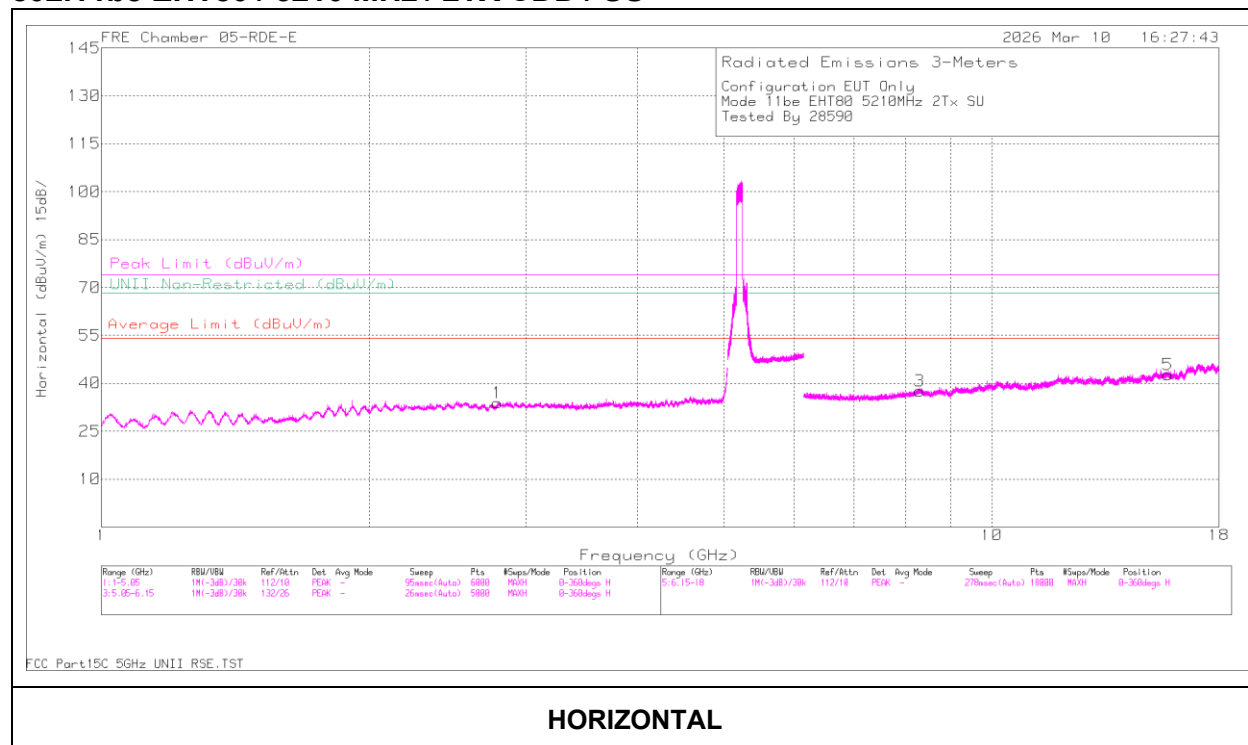
1.1.45. 802.11be MIMO PARTIAL RU MODE IN UNII-1 BAND – SPURIOUS EMISSIONS

UNII-1 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filt/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 26T - RU0	5180	6+5	1.972267	58.26	PK-U	31.40	0.00	-46.40	43.26	-	-	68.2	-24.94	360	200	H
			1.974542	58.14	PK-U	31.40	0.00	-46.45	43.09	-	-	68.2	-25.11	360	101	V
			3.121061	56.71	PK-U	33.00	0.00	-45.90	43.81	-	-	68.2	-24.39	360	200	V
			3.122336	56.68	PK-U	33.00	0.00	-45.90	43.78	-	-	68.2	-24.42	360	200	H
			9.938665	53.98	PK-U	37.50	0.00	-41.80	49.68	-	-	68.2	-18.52	360	101	H
			9.940093	54.30	PK-U	37.50	0.00	-41.81	49.99	-	-	68.2	-18.21	360	200	V
EHT20 26T - RU4	5200	6+5	* 3.848382	45.31	ADR	33.40	0.00	-47.32	31.39	54	-22.61	-	-	360	101	V
			* 3.851269	57.29	PK-U	33.40	0.00	-47.23	43.46	-	-	74	-30.54	360	101	H
			* 3.852843	45.42	ADR	33.40	0.00	-47.17	31.65	54	-22.35	-	-	360	101	H
			* 3.855195	56.86	PK-U	33.40	0.00	-47.12	43.14	-	-	74	-30.86	360	101	V
			10.053202	54.90	PK-U	37.30	0.00	-45.05	47.15	-	-	68.2	-21.05	360	101	V
			10.056767	55.29	PK-U	37.30	0.00	-45.16	47.43	-	-	68.2	-20.77	360	101	H
			16.911480	49.64	PK-U	42.00	0.00	-40.00	51.64	-	-	68.2	-16.56	360	101	H
			16.936287	48.89	PK-U	42.00	0.00	-40.31	50.58	-	-	68.2	-17.62	360	101	V
			* 8.122348	54.86	PK-U	35.90	0.00	-44.73	46.03	-	-	74	-27.97	360	101	H
EHT20 26T - RU8	5240	6+5	* 8.116308	43.08	ADR	35.90	0.00	-44.81	34.17	54	-19.83	-	-	360	101	H
			* 8.134570	54.77	PK-U	35.90	0.00	-44.67	46.00	-	-	74	-28	360	101	V
			* 8.124370	42.94	ADR	35.90	0.00	-44.68	34.16	54	-19.84	-	-	360	101	V
			3.058794	57.53	PK-U	32.90	0.00	-47.75	42.68	-	-	68.2	-25.52	360	200	V
			3.075461	57.68	PK-U	33.00	0.00	-47.80	42.88	-	-	68.2	-25.32	360	101	H
			13.891458	52.09	PK-U	39.40	0.00	-42.75	48.74	-	-	68.2	-19.46	360	101	H
			13.906202	52.49	PK-U	39.40	0.00	-42.78	49.11	-	-	68.2	-19.09	360	101	V
			* 2.208356	49.54	ADR	31.50	0.00	-50.20	30.84	54	-23.16	-	-	278	116	H
EHT80 484+242T - RU91	5210	6+5	* 2.208650	61.51	PK-U	31.50	0.00	-50.20	42.81	-	-	74	-31.19	278	116	H
			* 2.218989	49.53	ADR	31.50	0.00	-50.13	30.90	54	-23.1	-	-	278	116	V
			* 2.234422	61.08	PK-U	31.60	0.00	-50.08	42.60	-	-	74	-31.4	278	116	V
			* 4.655265	58.75	PK-U	34.20	0.00	-47.62	45.33	-	-	74	-28.67	278	116	V
			* 4.663345	46.76	ADR	34.20	0.00	-47.74	33.22	54	-20.78	-	-	278	116	V
			* 4.663809	46.72	ADR	34.20	0.00	-47.74	33.18	54	-20.82	-	-	278	116	H
			* 4.669669	58.76	PK-U	34.20	0.00	-47.80	45.16	-	-	74	-28.84	278	116	H
			15.097143	55.54	PK-U	40.70	0.00	-42.79	53.45	-	-	68.2	-14.75	278	116	V
			15.132943	56.22	PK-U	40.80	0.00	-43.20	53.82	-	-	68.2	-14.38	278	116	H
EHT160 996+484+242T - RU97	5250	6+5	8.014037	55.67	PK-U	35.90	0.00	-45.62	45.95	-	-	68.2	-22.25	5	100	H
			8.014245	56.36	PK-U	35.90	0.00	-45.63	46.63	-	-	68.2	-21.57	5	201	V
			9.526765	56.41	PK-U	37.00	0.00	-45.45	47.96	-	-	68.2	-20.24	45	200	V
			9.528272	57.07	PK-U	37.00	0.00	-45.46	48.61	-	-	68.2	-19.59	5	100	H
			14.110655	56.76	PK-U	39.10	0.00	-43.37	52.49	-	-	68.2	-15.71	5	100	H
			14.128173	56.08	PK-U	39.20	0.00	-43.22	52.06	-	-	68.2	-16.14	5	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

WORST-CASE HARMONICS AND SPURIOUS EMISSIONS**802.11be EHT80 / 5210 MHz / 2TX CDD / SU**

Radiated Emissions

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filt/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
5	* 15.779706	43.42	ADR	40.40	0.00	-42.50	41.32	54	-12.68	-	-	360	101	H
5	* 15.782128	54.77	PK-U	40.40	0.00	-42.30	52.87	-	-	74	-21.13	360	101	H
6	* 15.785164	55.55	PK-U	40.40	0.00	-42.12	53.83	-	-	74	-20.17	360	200	V
6	* 15.785799	43.48	ADR	40.40	0.00	-42.18	41.70	54	-12.3	-	-	360	200	V
1	* 2.790571	46.91	ADR	32.50	0.00	-47.14	32.27	54	-21.73	-	-	360	101	H
2	* 2.793306	58.59	PK-U	32.50	0.00	-47.10	43.99	-	-	74	-30.01	360	101	V
2	* 2.797666	46.87	ADR	32.40	0.00	-47.20	32.07	54	-21.93	-	-	360	101	V
1	* 2.804444	58.48	PK-U	32.50	0.00	-47.30	43.68	-	-	74	-30.32	360	101	H
4	* 8.305063	42.91	ADR	36.00	0.00	-42.61	36.30	54	-17.7	-	-	360	200	V
3	* 8.308853	43.03	ADR	36.00	0.00	-42.70	36.33	54	-17.67	-	-	360	101	H
4	* 8.309792	54.85	PK-U	36.00	0.00	-42.78	48.07	-	-	74	-25.93	360	200	V
3	* 8.313556	55.08	PK-U	36.00	0.00	-42.96	48.12	-	-	74	-25.88	360	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.1.46. 802.11n/ac SISO MODE IN UNII-2A BAND – BANDEDGE**20MHz**

UNII-2A (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
HT20	5320	6	* 5.350000	69.80	Pk	34.4	0.00	-38.20	66.00	-	-	74	-8.00	153	224	H
			* 5.351055	70.94	Pk	34.4	0.00	-38.20	67.14	-	-	74	-6.86	153	224	H
			* 5.350000	53.89	RMS	34.4	0.00	-38.20	50.09	54	-3.91	-	-	153	224	H
			* 5.350239	54.51	RMS	34.4	0.00	-38.20	50.71	54	-3.29	-	-	153	224	H
			* 5.350000	59.71	Pk	34.4	0.00	-38.20	55.91	-	-	74	-18.09	201	231	V
			* 5.350612	61.06	Pk	34.4	0.00	-38.20	57.26	-	-	74	-16.74	201	231	V
			* 5.350000	47.61	RMS	34.4	0.00	-38.20	43.81	54	-10.19	-	-	201	231	V
			* 5.350145	48.33	RMS	34.4	0.00	-38.20	44.53	54	-9.47	-	-	201	231	V
		5	* 5.350000	69.08	Pk	34.4	0.00	-38.20	65.28	-	-	74	-8.72	145	161	H
			* 5.350472	72.40	Pk	34.4	0.00	-38.20	68.60	-	-	74	-5.40	145	161	H
			* 5.350000	52.64	RMS	34.4	0.00	-38.20	48.84	54	-5.16	-	-	145	161	H
			* 5.350192	53.63	RMS	34.4	0.00	-38.20	49.83	54	-4.17	-	-	145	161	H
			* 5.350000	62.17	Pk	34.4	0.00	-38.20	58.37	-	-	74	-15.63	147	220	V
			* 5.350192	63.30	Pk	34.4	0.00	-38.20	59.50	-	-	74	-14.50	147	220	V
			* 5.350000	47.06	RMS	34.4	0.00	-38.20	43.26	54	-10.74	-	-	147	220	V
			* 5.350332	48.32	RMS	34.4	0.00	-38.20	44.52	54	-9.48	-	-	147	220	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

40MHz

UNII-2A (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
HT40	5310	6	* 5.350000	68.47	Pk	34.4	0.00	-38.20	64.67	-	-	74	-9.33	152	268	H
			* 5.351942	72.72	Pk	34.4	0.00	-38.20	68.92	-	-	74	-5.08	152	268	H
			* 5.350000	50.74	RMS	34.4	0.00	-38.20	46.94	54	-7.06	-	-	152	268	H
			* 5.350729	52.47	RMS	34.4	0.00	-38.20	48.67	54	-5.33	-	-	152	268	H
			* 5.350000	59.23	Pk	34.4	0.00	-38.20	55.43	-	-	74	-18.57	149	385	V
			* 5.350425	60.60	Pk	34.4	0.00	-38.20	56.80	-	-	74	-17.20	149	385	V
			* 5.350000	46.38	RMS	34.4	0.00	-38.20	42.58	54	-11.42	-	-	149	385	V
			* 5.352572	47.79	RMS	34.4	0.00	-38.14	44.05	54	-9.95	-	-	149	385	V
		5	* 5.350000	70.17	Pk	34.4	0.00	-38.20	66.37	-	-	74	-7.63	152	145	H
			* 5.350425	72.51	Pk	34.4	0.00	-38.20	68.71	-	-	74	-5.29	152	145	H
			* 5.350000	50.14	RMS	34.4	0.00	-38.20	46.34	54	-7.66	-	-	152	145	H
			* 5.350822	51.26	RMS	34.4	0.00	-38.20	47.46	54	-6.54	-	-	152	145	H
			* 5.350000	61.39	Pk	34.4	0.00	-38.20	57.59	-	-	74	-16.41	233	191	V
			* 5.350052	63.69	Pk	34.4	0.00	-38.20	59.89	-	-	74	-14.11	233	191	V
			* 5.350000	47.34	RMS	34.4	0.00	-38.20	43.54	54	-10.46	-	-	233	191	V
			* 5.352782	47.89	RMS	34.4	0.00	-38.12	44.17	54	-9.83	-	-	233	191	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

80MHz

UNII-2A (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
VHT80	5290	6	* 5.350000	64.57	Pk	34.5	0.00	-34.20	64.87	-	-	74	-9.13	181	203	H
			* 5.351363	68.24	Pk	34.6	0.00	-34.20	68.64	-	-	74	-5.36	181	203	H
			* 5.350000	45.95	RMS	34.5	0.00	-34.20	46.25	54	-7.75	-	-	181	203	H
			* 5.362573	47.15	RMS	34.6	0.00	-34.10	47.65	54	-6.35	-	-	181	203	H
			* 5.350000	57.27	Pk	34.5	0.00	-34.20	57.57	-	-	74	-16.43	263	198	V
			* 5.352124	58.74	Pk	34.6	0.00	-34.10	59.24	-	-	74	-14.76	263	198	V
		5	* 5.350000	42.40	RMS	34.5	0.00	-34.20	42.70	54	-11.3	-	-	263	198	V
			* 5.364594	43.47	RMS	34.6	0.00	-34.10	43.97	54	-10.03	-	-	263	198	V
			* 5.350000	71.52	Pk	34.4	0.00	-38.20	67.72	-	-	74	-6.28	156	163	H
			* 5.363165	72.67	Pk	34.4	0.00	-38.20	68.87	-	-	74	-5.13	156	163	H
			* 5.350000	51.48	RMS	34.4	0.00	-38.20	47.68	54	-6.32	-	-	156	163	H
			* 5.364075	53.32	RMS	34.4	0.00	-38.20	49.52	54	-4.48	-	-	156	163	H
			* 5.350000	62.89	Pk	34.4	0.00	-38.20	59.09	-	-	74	-14.91	246	209	V
			* 5.363958	65.64	Pk	34.4	0.00	-38.20	61.84	-	-	74	-12.16	246	209	V
			* 5.350000	47.32	RMS	34.4	0.00	-38.20	43.52	54	-10.48	-	-	246	209	V
			* 5.351755	48.70	RMS	34.4	0.00	-38.20	44.90	54	-9.10	-	-	246	209	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

160MHz

UNII-2A (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
VHT160	5250 (Straddle)	6	* 5.350000	52.30	Pk	35.0	0.00	-30.70	56.6	-	-	74	-17.40	156	294	H
			* 5.401821	64.27	Pk	35.0	0.00	-30.70	68.57	-	-	74	-5.43	156	294	H
			* 5.350000	41.39	RMS	35.0	0.10	-30.70	45.79	54	-8.21	-	-	156	294	H
			* 5.405234	43.78	RMS	35.0	0.10	-30.70	48.18	54	-5.82	-	-	156	294	H
			* 5.350000	51.70	Pk	35.0	0.00	-30.70	56	-	-	74	-18.00	186	100	V
			* 5.398960	58.91	Pk	35.0	0.00	-30.70	63.21	-	-	74	-10.79	186	100	V
		5	* 5.350000	39.74	RMS	35.0	0.10	-30.70	44.14	54	-9.86	-	-	186	100	V
			* 5.402110	41.18	RMS	35.0	0.10	-30.70	45.58	54	-8.42	-	-	186	100	V
			* 5.350000	55.23	Pk	34.5	0.00	-34.20	55.53	-	-	74	-18.47	180	153	H
			* 5.401427	68.55	Pk	34.5	0.00	-34.10	68.95	-	-	74	-5.05	180	153	H
			* 5.350000	43.12	RMS	34.5	0.10	-34.20	43.52	54	-10.48	-	-	180	153	H
			* 5.394995	46.25	RMS	34.5	0.10	-34.10	46.75	54	-7.25	-	-	180	153	H
			* 5.350000	53.70	Pk	34.5	0.00	-34.20	54	-	-	74	-20.00	260	176	V
			* 5.400036	62.90	Pk	34.5	0.00	-34.10	63.3	-	-	74	-10.70	260	176	V
			* 5.350000	42.27	RMS	34.5	0.10	-34.20	42.67	54	-11.33	-	-	260	176	V
			* 5.397279	43.54	RMS	34.5	0.10	-34.10	44.04	54	-9.96	-	-	260	176	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.47. 802.11n/ac MIMO MODE IN UNII-2A BAND - BANDEDGE

UNII-2A (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filtr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
HT20	5320	6+5	* 5.350000	68.20	Pk	34.4	0.00	-38.20	64.40	-	-	74	-9.60	160	112	H
			* 5.351522	72.43	Pk	34.4	0.00	-38.20	68.63	-	-	74	-5.37	160	112	H
			* 5.350000	51.16	RMS	34.4	0.00	-38.20	47.36	54	-6.64	-	-	160	112	H
			* 5.350985	53.98	RMS	34.4	0.00	-38.20	50.18	54	-3.82	-	-	160	112	H
			* 5.350000	63.22	Pk	34.4	0.00	-38.20	59.42	-	-	74	-14.58	228	201	V
			* 5.350192	65.17	Pk	34.4	0.00	-38.20	61.37	-	-	74	-12.63	228	201	V
			* 5.350000	48.65	RMS	34.4	0.00	-38.20	44.85	54	-9.15	-	-	228	201	V
			* 5.352922	49.01	RMS	34.4	0.00	-38.11	45.30	54	-8.70	-	-	228	201	V
HT40	5310	6+5	* 5.350000	65.11	Pk	34.7	0.00	-34.90	64.91	-	-	74	-9.09	227	174	H
			* 5.351802	69.03	Pk	34.8	0.00	-35.00	68.83	-	-	74	-5.17	227	174	H
			* 5.350000	48.59	RMS	34.7	0.00	-34.90	48.39	54	-5.61	-	-	227	174	H
			* 5.350775	49.40	RMS	34.7	0.00	-35.10	49.00	54	-5.00	-	-	227	174	H
			* 5.350000	56.46	Pk	34.7	0.00	-34.90	56.26	-	-	74	-17.74	307	205	V
			* 5.354019	59.18	Pk	34.8	0.00	-35.00	58.98	-	-	74	-15.02	307	205	V
			* 5.350000	44.73	RMS	34.7	0.00	-34.90	44.53	54	-9.47	-	-	307	205	V
			* 5.353715	45.55	RMS	34.8	0.00	-35.00	45.35	54	-8.65	-	-	307	205	V
VHT80	5290	6+5	* 5.350000	62.76	Pk	34.5	0.00	-32.57	64.69	-	-	74	-9.31	318	105	H
			* 5.366595	66.22	Pk	34.5	0.00	-32.63	68.09	-	-	74	-5.91	318	105	H
			* 5.350000	47.81	RMS	34.5	0.00	-32.57	49.74	54	-4.26	-	-	318	105	H
			* 5.350799	49.26	RMS	34.6	0.00	-32.58	51.28	54	-2.72	-	-	318	105	H
			* 5.350000	56.05	Pk	34.5	0.00	-32.57	57.98	-	-	74	-16.02	39	142	V
			* 5.372708	61.29	Pk	34.6	0.00	-32.64	63.25	-	-	74	-10.75	39	142	V
			* 5.350000	44.79	RMS	34.5	0.00	-32.57	46.72	54	-7.28	-	-	39	142	V
			* 5.356632	45.67	RMS	34.6	0.00	-32.63	47.64	54	-6.36	-	-	39	142	V
VHT160	5250 (Straddle)	6+5	* 5.350000	56.71	Pk	34.5	0.00	-32.57	58.64	-	-	74	-15.36	333	158	H
			* 5.397815	67.48	Pk	34.5	0.00	-32.61	69.37	-	-	74	-4.63	333	158	H
			* 5.350000	44.31	RMS	34.5	0.10	-32.57	46.34	54	-7.66	-	-	333	158	H
			* 5.402784	47.68	RMS	34.5	0.10	-32.63	49.65	54	-4.35	-	-	333	158	H
			* 5.350000	55.26	Pk	34.5	0.00	-32.57	57.19	-	-	74	-16.81	336	244	V
			* 5.401898	63.80	Pk	34.5	0.00	-32.65	65.65	-	-	74	-8.35	336	244	V
			* 5.350000	44.68	RMS	34.5	0.10	-32.57	46.71	54	-7.29	-	-	336	244	V
			* 5.391841	45.84	RMS	34.5	0.10	-32.58	47.86	54	-6.14	-	-	336	244	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.48. 802.11be SISO SU MODE IN UNII-2A BAND – BANDEDGE**20MHz**

UNII-2A (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 SU Mode	5320	6	* 5.350000	63.59	Pk	34.6	0.00	-32.36	65.83	-	-	74	-8.17	154	203	H
			* 5.350519	65.55	Pk	34.6	0.00	-32.35	67.8	-	-	74	-6.20	154	203	H
			* 5.350000	47.85	RMS	34.6	0.00	-32.36	50.09	54	-3.91	-	-	154	203	H
			* 5.350029	48.51	RMS	34.6	0.00	-32.36	50.75	54	-3.25	-	-	154	203	H
			* 5.350000	55.98	Pk	34.6	0.00	-32.36	58.22	-	-	74	-15.78	242	182	V
			* 5.352479	57.70	Pk	34.6	0.00	-32.32	59.98	-	-	74	-14.02	242	182	V
		5	* 5.350000	44.51	RMS	34.6	0.00	-32.36	46.75	54	-7.25	-	-	242	182	V
			* 5.351265	45.49	RMS	34.6	0.00	-32.33	47.76	54	-6.24	-	-	242	182	V
			* 5.350000	64.48	Pk	34.5	0.00	-32.57	66.41	-	-	74	-7.59	136	151	H
			* 5.350075	67.56	Pk	34.5	0.00	-32.57	69.49	-	-	74	-4.51	136	151	H
			* 5.350000	48.52	RMS	34.5	0.00	-32.57	50.45	54	-3.55	-	-	136	151	H
			* 5.350835	49.43	RMS	34.6	0.00	-32.58	51.45	54	-2.55	-	-	136	151	H
			* 5.350000	58.93	Pk	34.5	0.00	-32.57	60.86	-	-	74	-13.14	228	216	V
			* 5.350962	60.76	Pk	34.6	0.00	-32.58	62.78	-	-	74	-11.22	228	216	V
			* 5.350000	45.66	RMS	34.5	0.00	-32.57	47.59	54	-6.41	-	-	228	216	V
			* 5.350192	46.22	RMS	34.5	0.00	-32.57	48.15	54	-5.85	-	-	228	216	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

40MHz

UNII-2A (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT40 SU Mode	5310	6	* 5.350000	60.29	Pk	35.0	0.00	-30.70	64.59	-	-	74	-9.41	327	107	H
			* 5.352938	64.86	Pk	35.0	0.00	-30.70	69.16	-	-	74	-4.84	327	107	H
			* 5.350000	43.72	RMS	35.0	0.00	-30.70	48.02	54	-5.98	-	-	327	107	H
			* 5.350155	44.71	RMS	35.0	0.00	-30.70	49.01	54	-4.99	-	-	327	107	H
			* 5.350000	56.36	Pk	35.0	0.00	-30.70	60.66	-	-	74	-13.34	27	260	V
			* 5.350181	57.76	Pk	35.0	0.00	-30.70	62.06	-	-	74	-11.94	27	260	V
		5	* 5.350000	40.59	RMS	35.0	0.00	-30.70	44.89	54	-9.11	-	-	27	260	V
			* 5.350470	41.28	RMS	35.0	0.00	-30.70	45.58	54	-8.42	-	-	27	260	V
			* 5.350000	66.81	Pk	34.5	0.00	-37.02	64.29	-	-	74	-9.71	44	112	H
			* 5.350659	71.62	Pk	34.5	0.00	-37.00	69.12	-	-	74	-4.88	44	112	H
			* 5.350000	49.72	RMS	34.5	0.00	-37.02	47.20	54	-6.80	-	-	44	112	H
			* 5.351219	51.04	RMS	34.5	0.00	-36.99	48.55	54	-5.45	-	-	44	112	H
			* 5.350000	69.97	Pk	34.5	0.00	-37.02	67.45	-	-	74	-6.55	359	106	V
			* 5.352805	71.38	Pk	34.5	0.00	-37.01	68.87	-	-	74	-5.13	359	106	V
			* 5.350000	51.32	RMS	34.5	0.00	-37.02	48.80	54	-5.20	-	-	359	106	V
			* 5.350565	51.94	RMS	34.5	0.00	-37.00	49.44	54	-4.56	-	-	359	106	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

80MHz

UNII-2A (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filt/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT80 SU Mode	5290	6	* 5.350000	48.36	Pk	34.3	0.00	-16.50	66.16	-	-	74	-7.84	333	259	H
			* 5.350050	50.89	Pk	34.3	0.00	-16.50	68.69	-	-	74	-5.31	333	259	H
			* 5.350000	31.10	RMS	34.3	0.00	-16.50	48.90	54	-5.10	-	-	333	259	H
			* 5.350549	33.02	RMS	34.3	0.00	-16.50	50.82	54	-3.18	-	-	333	259	H
			* 5.350000	41.50	Pk	34.3	0.00	-16.50	59.30	-	-	74	-14.70	353	151	V
			* 5.353489	43.80	Pk	34.3	0.00	-16.50	61.60	-	-	74	-12.40	353	151	V
			* 5.350000	28.69	RMS	34.3	0.00	-16.50	46.49	54	-7.51	-	-	353	151	V
			* 5.350602	29.43	RMS	34.3	0.00	-16.50	47.23	54	-6.77	-	-	353	151	V
		5	* 5.350000	64.51	Pk	34.5	0.00	-35.30	63.71	-	-	74	-10.29	330	170	H
			* 5.350915	69.44	Pk	34.5	0.00	-35.29	68.65	-	-	74	-5.35	330	170	H
			* 5.350000	46.03	RMS	34.5	0.00	-35.30	45.23	54	-8.77	-	-	330	170	H
			* 5.354019	48.05	RMS	34.5	0.00	-35.33	47.22	54	-6.78	-	-	330	170	H
			* 5.350000	55.67	Pk	34.5	0.00	-35.30	54.87	-	-	74	-19.13	330	170	V
			* 5.363748	58.34	Pk	34.5	0.00	-35.28	57.56	-	-	74	-16.44	330	170	V
			* 5.350000	45.05	RMS	34.5	0.00	-35.30	44.25	54	-9.75	-	-	330	170	V
			* 5.418954	45.90	RMS	34.6	0.00	-35.26	45.24	54	-8.76	-	-	330	170	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

160MHz

UNII-2A (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filt/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT160 SU Mode	5250 (Straddle)	6	* 5.350000	66.50	Pk	34.7	0.00	-34.90	66.30	-	-	74	-7.70	72	219	H
			* 5.350472	68.94	Pk	34.7	0.00	-35.00	68.64	-	-	74	-5.36	72	219	H
			* 5.350000	50.43	RMS	34.7	0.14	-34.90	50.37	54	-3.63	-	-	72	219	H
			* 5.356842	51.22	RMS	34.8	0.14	-35.00	51.16	54	-2.84	-	-	72	219	H
			* 5.350000	62.48	Pk	34.7	0.00	-34.90	62.28	-	-	74	-11.72	95	150	V
			* 5.405981	64.58	Pk	34.8	0.00	-34.90	64.48	-	-	74	-9.52	95	150	V
			* 5.350000	46.35	RMS	34.7	0.14	-34.90	46.29	54	-7.71	-	-	95	150	V
			* 5.350542	48.05	RMS	34.7	0.14	-35.00	47.89	54	-6.11	-	-	95	150	V
		5	* 5.350000	68.66	Pk	34.5	0.00	-37.02	66.14	-	-	74	-7.86	97	158	H
			* 5.405374	71.65	Pk	34.6	0.00	-36.91	69.34	-	-	74	-4.66	97	158	H
			* 5.350000	51.32	RMS	34.5	0.14	-37.02	48.94	54	-5.06	-	-	97	158	H
			* 5.409248	52.74	RMS	34.6	0.14	-36.91	50.57	54	-3.43	-	-	97	158	H
			* 5.350000	64.35	Pk	34.5	0.00	-37.02	61.83	-	-	74	-12.17	172	182	V
			* 5.404931	66.59	Pk	34.6	0.00	-36.91	64.28	-	-	74	-9.72	172	182	V
			* 5.350000	47.34	RMS	34.5	0.14	-37.02	44.96	54	-9.04	-	-	172	182	V
			* 5.402248	48.67	RMS	34.6	0.14	-36.92	46.49	54	-7.51	-	-	172	182	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.49. 802.11be SISO PARTIAL RU MODE IN UNII-2A BAND – BANDEDGE

UNII-2A (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filt/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 52+26T - RU72	5320	6	* 5.350000	57.98	Pk	34.5	0.00	-35.37	57.11	-	-	74	-16.89	296	201	H
			* 5.351242	59.02	Pk	34.5	0.00	-35.37	58.15	-	-	74	-15.85	296	201	H
			* 5.350000	45.43	RMS	34.5	0.00	-35.37	44.56	54	-9.44	-	-	296	201	H
			* 5.366805	46.12	RMS	34.5	0.00	-35.33	45.29	54	-8.71	-	-	296	201	H
			* 5.350000	56.41	Pk	34.5	0.00	-35.37	55.54	-	-	74	-18.46	306	169	V
			* 5.381271	57.44	Pk	34.5	0.00	-35.29	56.65	-	-	74	-17.35	306	169	V
		5	* 5.350000	44.69	RMS	34.5	0.00	-35.37	43.82	54	-10.18	-	-	306	169	V
			* 5.379381	45.57	RMS	34.5	0.00	-35.30	44.77	54	-9.23	-	-	306	169	V
			* 5.350000	60.00	Pk	34.5	0.00	-35.37	59.13	-	-	74	-14.87	284	138	H
			* 5.350239	62.10	Pk	34.5	0.00	-35.37	61.23	-	-	74	-12.77	284	138	H
			* 5.350000	45.25	RMS	34.5	0.00	-35.37	44.38	54	-9.62	-	-	284	138	H
			* 5.350589	46.54	RMS	34.5	0.00	-35.37	45.67	54	-8.33	-	-	284	138	H
			* 5.350000	58.02	Pk	34.5	0.00	-35.37	57.15	-	-	74	-16.85	354	203	V
			* 5.350705	58.91	Pk	34.5	0.00	-35.37	58.04	-	-	74	-15.96	354	203	V
			* 5.350000	45.42	RMS	34.5	0.00	-35.37	44.55	54	-9.45	-	-	354	203	V
			* 5.410601	45.88	RMS	34.5	0.00	-35.22	45.16	54	-8.84	-	-	354	203	V
EHT80 484+242T - RU90	5290	6	* 5.350000	64.14	Pk	34.5	0.00	-35.37	63.27	-	-	74	-10.73	279	276	H
			* 5.350169	69.79	Pk	34.5	0.00	-35.37	68.92	-	-	74	-5.08	279	276	H
			* 5.350000	47.16	RMS	34.5	0.00	-35.37	46.29	54	-7.71	-	-	279	276	H
			* 5.356702	49.20	RMS	34.5	0.00	-35.36	48.34	54	-5.66	-	-	279	276	H
			* 5.350000	58.29	Pk	34.5	0.00	-35.37	57.42	-	-	74	-16.58	289	176	V
			* 5.356888	63.98	Pk	34.5	0.00	-35.36	63.12	-	-	74	-10.88	289	176	V
		5	* 5.350000	45.34	RMS	34.5	0.00	-35.37	44.47	54	-9.53	-	-	289	176	V
			* 5.356258	46.60	RMS	34.5	0.00	-35.36	45.74	54	-8.26	-	-	289	176	V
			* 5.350000	63.78	Pk	34.5	0.00	-34.84	63.44	-	-	74	-10.56	340	163	H
			* 5.350332	69.25	Pk	34.5	0.00	-34.84	68.91	-	-	74	-5.09	340	163	H
			* 5.350000	46.94	RMS	34.5	0.00	-34.84	46.60	54	-7.40	-	-	340	163	H
			* 5.358592	48.15	RMS	34.5	0.00	-34.88	47.77	54	-6.23	-	-	340	163	H
			* 5.350000	58.58	Pk	34.5	0.00	-34.84	58.24	-	-	74	-15.76	20	215	V
			* 5.357075	64.00	Pk	34.5	0.00	-34.88	63.62	-	-	74	-10.38	20	215	V
			* 5.350000	45.44	RMS	34.5	0.00	-34.84	45.10	54	-8.90	-	-	20	215	V
			* 5.353395	46.45	RMS	34.5	0.00	-34.91	46.04	54	-7.96	-	-	20	215	V
EHT160 996+484+24 2T - RU96	5250 (Straddle)	6	* 5.350000	61.39	Pk	34.8	0.00	-38.18	58.01	-	-	74	-15.99	35	132	H
			* 5.396788	71.44	Pk	34.8	0.00	-38.13	68.11	-	-	74	-5.89	35	132	H
			* 5.350000	47.52	RMS	34.8	0.00	-38.18	44.14	54	-9.86	-	-	35	132	H
			* 5.394128	50.57	RMS	34.8	0.00	-38.14	47.23	54	-6.77	-	-	35	132	H
			* 5.350000	63.50	Pk	34.8	0.00	-38.18	60.12	-	-	74	-13.88	309	177	V
			* 5.396671	72.75	Pk	34.8	0.00	-38.13	69.42	-	-	74	-4.58	309	177	V
		5	* 5.350000	47.89	RMS	34.8	0.00	-38.18	44.51	54	-9.49	-	-	309	177	V
			* 5.397231	51.43	RMS	34.8	0.00	-38.13	48.10	54	-5.90	-	-	309	177	V
			* 5.350000	62.57	Pk	34.5	0.00	-35.30	61.77	-	-	74	-12.23	321	172	H
			* 5.396555	70.20	Pk	34.5	0.00	-35.25	69.45	-	-	74	-4.55	321	172	H
			* 5.350000	46.24	RMS	34.5	0.00	-35.30	45.44	54	-8.56	-	-	321	172	H
			* 5.399098	49.46	RMS	34.5	0.00	-35.29	48.67	54	-5.33	-	-	321	172	H
			* 5.350000	55.83	Pk	34.5	0.00	-35.30	55.03	-	-	74	-18.97	56	214	V
			* 5.397698	65.09	Pk	34.5	0.00	-35.27	64.32	-	-	74	-9.68	56	214	V
			* 5.350000	45.55	RMS	34.5	0.00	-35.30	44.75	54	-9.25	-	-	56	214	V
			* 5.395458	46.69	RMS	34.5	0.00	-35.24	45.95	54	-8.05	-	-	56	214	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.50. 802.11be MIMO SU MODE IN UNII-2A BAND – BANDEDGE

UNII-2A (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filtr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 SU Mode	5320	6+5	* 5.350000	67.93	Pk	34.5	0.00	-35.37	67.06	-	-	74	-6.94	95	181	H
			* 5.351219	69.65	Pk	34.5	0.00	-35.37	68.78	-	-	74	-5.22	95	181	H
			* 5.350000	49.57	RMS	34.5	0.00	-35.37	48.70	54	-5.30	-	-	95	181	H
			* 5.351849	51.83	RMS	34.5	0.00	-35.37	50.96	54	-3.04	-	-	95	181	H
			* 5.350000	62.51	Pk	34.5	0.00	-35.37	61.64	-	-	74	-12.36	171	230	V
			* 5.350239	63.74	Pk	34.5	0.00	-35.37	62.87	-	-	74	-11.13	171	230	V
			* 5.350000	47.38	RMS	34.5	0.00	-35.37	46.51	54	-7.49	-	-	171	230	V
			* 5.350029	47.99	RMS	34.5	0.00	-35.37	47.12	54	-6.88	-	-	171	230	V
EHT40 SU Mode	5310	6+5	* 5.350000	71.19	Pk	34.4	0.00	-37.70	67.89	-	-	74	-6.11	332	308	H
			* 5.350635	72.33	Pk	34.4	0.00	-37.70	69.03	-	-	74	-4.97	332	308	H
			* 5.350000	51.53	RMS	34.4	0.00	-37.70	48.23	54	-5.77	-	-	332	308	H
			* 5.350285	52.62	RMS	34.4	0.00	-37.70	49.32	54	-4.68	-	-	332	308	H
			* 5.350000	62.28	Pk	34.4	0.00	-37.70	58.98	-	-	74	-15.02	48	201	V
			* 5.354369	65.21	Pk	34.4	0.00	-37.64	61.97	-	-	74	-12.03	48	201	V
			* 5.350000	47.91	RMS	34.4	0.00	-37.70	44.61	54	-9.39	-	-	48	201	V
			* 5.353902	48.29	RMS	34.4	0.00	-37.61	45.08	54	-8.92	-	-	48	201	V
EHT80 SU Mode	5290	6+5	* 5.350000	51.43	Pk	34.5	0.00	-23.10	62.83	-	-	74	-11.17	29	120	H
			* 5.351102	57.40	Pk	34.5	0.00	-23.00	68.90	-	-	74	-5.10	29	120	H
			* 5.350000	32.23	RMS	34.5	0.00	-23.10	43.63	54	-10.37	-	-	29	120	H
			* 5.376535	35.54	RMS	34.6	0.00	-23.10	47.04	54	-6.96	-	-	29	120	H
			* 5.350000	52.10	Pk	34.5	0.00	-23.10	63.50	-	-	74	-10.50	80	195	V
			* 5.365242	52.77	Pk	34.6	0.00	-23.10	64.27	-	-	74	-9.73	80	195	V
			* 5.350000	30.62	RMS	34.5	0.00	-23.10	42.02	54	-11.98	-	-	80	195	V
			* 5.369045	32.44	RMS	34.6	0.00	-23.10	43.94	54	-10.06	-	-	80	195	V
EHT160 SU Mode	5250 (Straddle)	6+5	* 5.350000	67.40	Pk	34.7	0.00	-37.18	64.92	-	-	74	-9.08	209	160	H
			* 5.354182	69.29	Pk	34.8	0.00	-37.16	66.93	-	-	74	-7.07	209	160	H
			* 5.350000	51.49	RMS	34.7	0.14	-37.18	49.15	54	-4.85	-	-	209	160	H
			* 5.353972	52.97	RMS	34.8	0.14	-37.15	50.76	54	-3.24	-	-	209	160	H
			* 5.350000	59.65	Pk	34.7	0.00	-37.18	57.17	-	-	74	-16.83	117	137	V
			* 5.367832	67.20	Pk	34.7	0.00	-37.09	64.81	-	-	74	-9.19	117	137	V
			* 5.350000	48.41	RMS	34.7	0.14	-37.18	46.07	54	-7.93	-	-	117	137	V
			* 5.358032	50.20	RMS	34.8	0.14	-37.24	47.90	54	-6.10	-	-	117	137	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

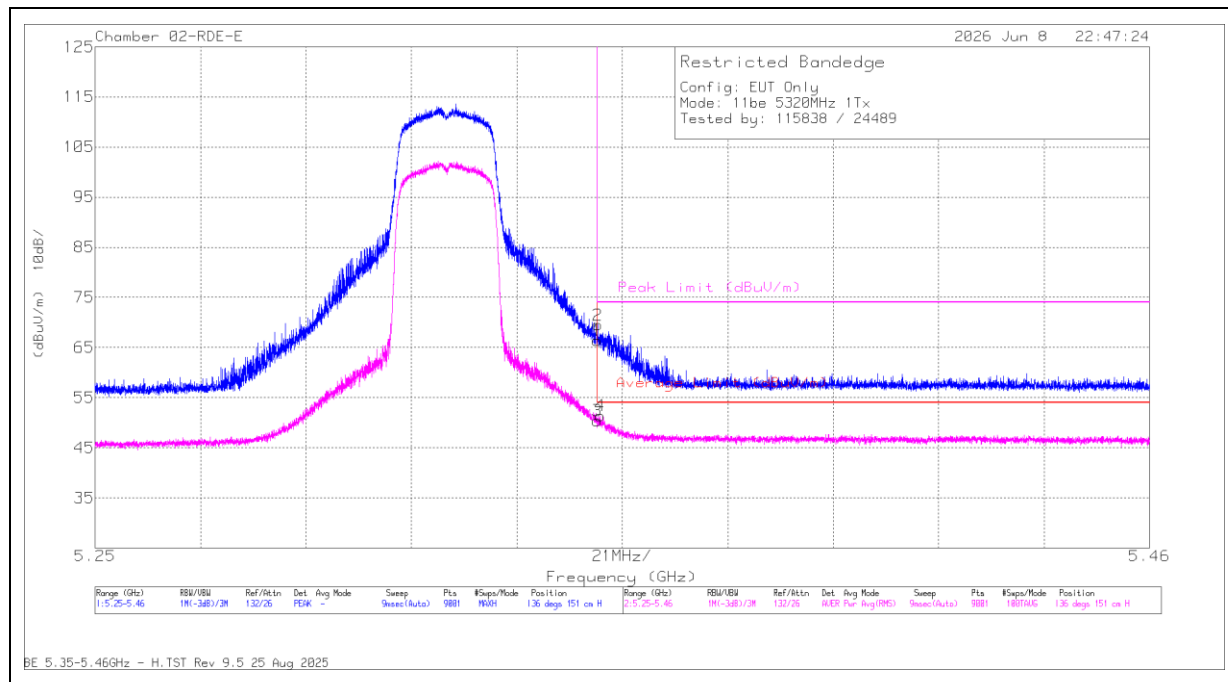
1.1.51. 802.11be MIMO PARTIAL RU MODE IN UNII-2A BAND – BANDEDGE

UNII-2A (MIMO CDD)	Channel Frequency MHz	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filtr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 52+26T - RU72	5320	6+5	* 5.350000	61.91	Pk	34.5	0.00	-35.37	61.04	-	-	74	-12.96	111	358	H
			* 5.350099	62.53	Pk	34.5	0.00	-35.37	61.66	-	-	74	-12.34	111	358	H
			* 5.350000	45.58	RMS	34.5	0.00	-35.37	44.71	54	-9.29	-	-	111	358	H
			* 5.359572	46.30	RMS	34.5	0.00	-35.35	45.45	54	-8.55	-	-	111	358	H
			* 5.350000	58.47	Pk	34.5	0.00	-35.37	57.60	-	-	74	-16.40	177	229	V
			* 5.350075	59.65	Pk	34.5	0.00	-35.37	58.78	-	-	74	-15.22	177	229	V
			* 5.350000	45.28	RMS	34.5	0.00	-35.37	44.41	54	-9.59	-	-	177	229	V
			* 5.369605	45.87	RMS	34.5	0.00	-35.32	45.05	54	-8.95	-	-	177	229	V
			* 5.350000	64.72	Pk	34.7	0.00	-37.18	62.24	-	-	74	-11.76	31	176	H
			* 5.359222	68.52	Pk	34.8	0.00	-37.24	66.08	-	-	74	-7.92	31	176	H
EHT80 484+242T - RU90	5290	6+5	* 5.350000	49.50	RMS	34.7	0.00	-37.18	47.02	54	-6.98	-	-	31	176	H
			* 5.354322	50.27	RMS	34.8	0.00	-37.16	47.91	54	-6.09	-	-	31	176	H
			* 5.350000	61.60	Pk	34.7	0.00	-37.18	59.12	-	-	74	-14.88	353	119	V
			* 5.357822	71.26	Pk	34.8	0.00	-37.23	68.83	-	-	74	-5.17	353	119	V
			* 5.350000	49.97	RMS	34.7	0.00	-37.18	47.49	54	-6.51	-	-	353	119	V
			* 5.358382	52.02	RMS	34.8	0.00	-37.24	49.58	54	-4.42	-	-	353	119	V
			* 5.350000	60.69	Pk	34.5	0.00	-35.37	59.82	-	-	74	-14.18	285	303	H
			* 5.395971	69.91	Pk	34.5	0.00	-35.26	69.15	-	-	74	-4.85	285	303	H
			* 5.350000	46.72	RMS	34.5	0.00	-35.37	45.85	54	-8.15	-	-	285	303	H
			* 5.356118	48.82	RMS	34.5	0.00	-35.36	47.96	54	-6.04	-	-	285	303	H
EHT160 996+484+ 242T - RU96	5250 (Straddle)	6+5	* 5.350000	58.36	Pk	34.5	0.00	-35.37	57.49	-	-	74	-16.51	18	244	V
			* 5.375018	61.62	Pk	34.5	0.00	-35.31	60.81	-	-	74	-13.19	18	244	V
			* 5.350000	45.96	RMS	34.5	0.00	-35.37	45.09	54	-8.91	-	-	18	244	V
			* 5.350169	46.36	RMS	34.5	0.00	-35.37	45.49	54	-8.51	-	-	18	244	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

WORST-CASE BANDEDGE (HIGH CHANNEL)**802.11be EHT20 / 5320 MHz / SISO /SU****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fltr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.350000	64.48	Pk	34.5	0.00	-32.57	66.41	-	-	74	-7.59	136	151	H
2	* 5.350075	67.56	Pk	34.5	0.00	-32.57	69.49	-	-	74	-4.51	136	151	H
3	* 5.350000	48.52	RMS	34.5	0.00	-32.57	50.45	54	-3.55	-	-	136	151	H
4	* 5.350635	49.43	RMS	34.6	0.00	-32.58	51.45	54	-2.55	-	-	136	151	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.52. 802.11n/ac MIMO MODE IN UNII-2A BAND – SPURIOUS EMISSIONS

20MHz

UNII-2A (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity	
HT20	5260	6+5	* 1.340994	50.47	ADR	29.80	0.00	-50.04	30.23	54	-23.77	-	-	0	100	H	
			* 1.342247	61.77	PK-U	29.80	0.00	-50.04	41.53	-	-	74	-32.47	0	100	H	
			* 1.34336	62.23	PK-U	29.80	0.00	-50.04	41.99	-	-	74	-32.01	0	201	V	
			* 1.344494	50.31	ADR	29.80	0.00	-50.05	30.06	54	-23.94	-	-	0	201	V	
			* 12.239067	43.00	ADR	38.90	0.00	-43.36	38.54	54	-15.46	-	-	0	201	V	
			* 12.251609	56.03	PK-U	39.00	0.00	-43.18	51.85	-	-	74	-22.15	0	201	V	
			* 12.375194	54.65	PK-U	38.80	0.00	-43.36	50.09	-	-	74	-23.91	0	100	H	
			* 12.380123	43.04	ADR	38.80	0.00	-43.20	38.64	54	-15.36	-	-	0	100	H	
			* 3.767271	57.89	PK-U	33.40	0.00	-47.41	43.88	-	-	74	-30.12	0	100	H	
			* 3.767749	46.56	ADR	33.40	0.00	-47.42	32.54	54	-21.46	-	-	0	200	V	
			* 3.768851	46.25	ADR	33.40	0.00	-47.45	32.20	54	-21.8	-	-	0	100	H	
			* 3.776549	58.33	PK-U	33.50	0.00	-47.25	44.58	-	-	74	-29.42	0	200	V	
			* 1.339013	61.85	PK-U	29.80	0.00	-50.02	41.63	-	-	74	-32.37	0	100	H	
			* 1.34284	50.34	ADR	29.80	0.00	-50.04	30.10	54	-23.9	-	-	0	100	H	
			* 1.344207	50.54	ADR	29.80	0.00	-50.05	30.29	54	-23.71	-	-	0	201	V	
			* 1.346634	62.18	PK-U	29.80	0.00	-50.05	41.93	-	-	74	-32.07	0	201	V	
	5300		* 12.392832	55.40	PK-U	38.80	0.00	-42.86	51.34	-	-	74	-22.66	0	100	H	
			* 12.399632	43.53	ADR	38.90	0.00	-42.79	39.64	54	-14.36	-	-	0	100	H	
			* 12.402862	55.18	PK-U	38.90	0.00	-42.80	51.28	-	-	74	-22.72	0	201	V	
			* 12.409377	43.34	ADR	38.90	0.00	-42.88	39.36	54	-14.64	-	-	0	201	V	
			* 3.978407	58.40	PK-U	33.30	0.00	-47.93	43.77	-	-	74	-30.23	0	100	H	
			* 3.979892	58.66	PK-U	33.30	0.00	-47.87	44.09	-	-	74	-29.91	0	200	V	
			* 3.982952	47.09	ADR	33.30	0.00	-47.80	32.59	54	-21.41	-	-	0	200	V	
			* 3.989893	47.19	ADR	33.30	0.00	-47.88	32.61	54	-21.39	-	-	0	100	H	
			* 1.394903	61.27	PK-U	29.30	0.00	-50.00	40.57	-	-	74	-33.43	0	100	H	
			* 1.397702	61.56	PK-U	29.30	0.00	-49.99	40.87	-	-	74	-33.13	0	201	V	
			* 1.397743	50.02	ADR	29.30	0.00	-49.99	29.33	54	-24.67	-	-	0	100	H	
			* 1.398149	50.06	ADR	29.30	0.00	-49.99	29.37	54	-24.63	-	-	0	201	V	
			* 15.642062	43.69	ADR	41.40	0.00	-42.70	42.39	54	-11.61	-	-	0	200	H	
			* 15.642995	55.34	PK-U	41.40	0.00	-42.72	54.02	-	-	74	-19.98	0	200	V	
			* 15.644342	55.16	PK-U	41.40	0.00	-42.67	53.89	-	-	74	-20.11	0	200	H	
			5320	* 15.64439	43.89	ADR	41.40	0.00	-42.67	42.62	54	-11.38	-	-	0	200	V
				3.062234	57.56	PK-U	33.00	0.00	-47.50	43.06	-	-	68.2	-25.14	0	100	H
				3.065465	58.05	PK-U	33.00	0.00	-47.53	43.52	-	-	68.2	-24.68	0	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

40MHz

UNII-2A (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filt/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
HT40	5270	6+5	* 15.700712	54.75	PK-U	40.40	0.00	-42.77	52.38	-	-	74	-21.62	360	101	V
			* 15.723099	53.97	PK-U	40.50	0.00	-42.29	52.18	-	-	74	-21.82	360	101	H
			* 15.723747	42.66	ADR	40.50	0.00	-42.23	40.93	54	-13.07	-	-	360	101	V
			* 15.734841	42.49	ADR	40.40	0.00	-41.92	40.97	54	-13.03	-	-	360	101	H
			* 2.734991	58.75	PK-U	32.40	0.00	-47.10	44.05	-	-	74	-29.95	360	200	V
			* 2.735866	58.72	PK-U	32.40	0.00	-47.27	43.85	-	-	74	-30.15	360	200	H
			* 2.738271	46.72	ADR	32.40	0.00	-47.35	31.77	54	-22.23	-	-	360	200	V
			* 2.74112	46.73	ADR	32.40	0.00	-47.21	31.92	54	-22.08	-	-	360	200	H
			* 8.282282	54.22	PK-U	36.10	0.00	-42.70	47.62	-	-	74	-26.38	360	101	H
			* 8.282624	54.42	PK-U	36.10	0.00	-42.70	47.82	-	-	74	-26.18	360	101	V
	5310		* 8.291984	42.88	ADR	36.00	0.00	-42.60	36.28	54	-17.72	-	-	360	101	V
			* 8.303299	42.88	ADR	36.00	0.00	-42.70	36.18	54	-17.82	-	-	360	101	H
			* 2.25835	46.13	ADR	32.00	0.00	-46.64	31.49	54	-22.51	-	-	360	200	H
			* 2.26123	46.13	ADR	32.00	0.00	-46.62	31.51	54	-22.49	-	-	360	200	V
			* 2.271084	58.22	PK-U	32.00	0.00	-46.79	43.43	-	-	74	-30.57	360	200	V
			* 2.278084	58.28	PK-U	32.00	0.00	-46.89	43.39	-	-	74	-30.61	360	200	H
			* 7.523521	40.00	ADR	35.70	0.00	-43.20	32.50	54	-21.5	-	-	360	101	V
			* 7.525722	52.69	PK-U	35.70	0.00	-43.27	45.12	-	-	74	-28.88	360	101	H
			* 7.526312	51.90	PK-U	35.70	0.00	-43.27	44.33	-	-	74	-29.67	360	101	V
			* 7.530389	41.17	ADR	35.70	0.00	-43.20	33.67	54	-20.33	-	-	360	101	H
			12.849334	53.13	PK-U	38.90	0.00	-41.33	50.70	-	-	68.2	-17.5	360	101	V
			12.852343	52.66	PK-U	38.90	0.00	-41.20	50.36	-	-	68.2	-17.84	360	200	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

80MHz

UNII-2A (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filtr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
VHT80	5290	6+5	* 12.199428	42.39	ADR	39.00	0.00	-41.50	39.89	54	-14.11	-	-	2	101	V
			* 12.20189	54.20	PK-U	38.90	0.00	-41.50	51.60	-	-	74	-22.4	2	101	V
			* 12.221459	54.11	PK-U	39.00	0.00	-41.55	51.56	-	-	74	-22.44	2	101	H
			* 12.222885	42.40	ADR	39.00	0.00	-41.50	39.90	54	-14.1	-	-	2	101	H
			* 2.79976	46.82	ADR	32.40	0.00	-47.20	32.02	54	-21.98	-	-	2	101	V
			* 2.801653	46.82	ADR	32.50	0.00	-47.17	32.15	54	-21.85	-	-	2	101	H
			* 2.80268	58.48	PK-U	32.50	0.00	-47.20	43.78	-	-	74	-30.22	2	101	V
			* 2.804346	58.21	PK-U	32.50	0.00	-47.30	43.41	-	-	74	-30.59	2	101	H
			* 8.45489	42.42	ADR	36.00	0.00	-42.50	35.92	54	-18.08	-	-	2	101	V
			* 8.456526	53.96	PK-U	36.00	0.00	-42.50	47.46	-	-	74	-26.54	2	101	H
			* 8.46501	42.65	ADR	36.00	0.00	-42.80	35.85	54	-18.15	-	-	2	101	H
			* 8.483375	54.37	PK-U	36.00	0.00	-42.90	47.47	-	-	74	-26.53	2	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.1.53. 802.11be MIMO SU MODE IN UNII-2A BAND – SPURIOUS EMISSIONS

20MHz

UNII-2A (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 SU Mode	5260	6+5	1.969553	58.47	PK-U	31.30	0.00	-46.41	43.36	-	-	68.2	-24.84	360	101	H
			1.972241	57.95	PK-U	31.40	0.00	-46.40	42.95	-	-	68.2	-25.25	360	200	V
			3.096303	56.80	PK-U	33.10	0.00	-46.07	43.83	-	-	68.2	-24.37	360	200	H
			3.112179	56.57	PK-U	33.10	0.00	-45.88	43.79	-	-	68.2	-24.41	360	101	V
			10.149356	54.02	PK-U	37.80	0.00	-42.50	49.32	-	-	68.2	-18.88	360	200	V
	5300		10.187011	54.23	PK-U	37.80	0.00	-41.60	50.43	-	-	68.2	-17.77	360	101	H
			* 15.703946	55.51	PK-U	40.40	0.00	-42.61	53.30	-	-	74	-20.7	360	200	H
			* 15.731746	43.31	ADR	40.40	0.00	-42.00	41.71	54	-12.29	-	-	360	200	H
			* 15.734592	43.23	ADR	40.40	0.00	-41.94	41.69	54	-12.31	-	-	360	101	V
			* 15.735530	55.14	PK-U	40.40	0.00	-41.95	53.59	-	-	74	-20.41	360	101	V
			* 2.737560	58.03	PK-U	32.40	0.00	-47.36	43.07	-	-	74	-30.93	360	200	H
			* 2.739160	46.55	ADR	32.40	0.00	-47.22	31.73	54	-22.27	-	-	360	200	H
			* 2.739227	46.68	ADR	32.40	0.00	-47.22	31.86	54	-22.14	-	-	360	101	V
			* 2.739234	58.62	PK-U	32.40	0.00	-47.22	43.80	-	-	74	-30.2	360	101	V
			* 8.449639	42.37	ADR	36.00	0.00	-42.64	35.73	54	-18.27	-	-	360	200	V
			* 8.471048	53.84	PK-U	36.00	0.00	-42.80	47.04	-	-	74	-26.96	360	200	V
			* 8.478143	53.79	PK-U	36.00	0.00	-42.89	46.90	-	-	74	-27.1	360	101	H
			* 8.486263	42.23	ADR	36.10	0.00	-42.70	35.63	54	-18.37	-	-	360	101	H
	5320		* 15.575492	54.57	PK-U	40.40	0.00	-42.65	52.32	-	-	74	-21.68	0	200	H
			* 15.576963	43.08	ADR	40.40	0.00	-42.70	40.78	54	-13.22	-	-	0	200	H
			* 15.582784	43.11	ADR	40.40	0.00	-42.68	40.83	54	-13.17	-	-	0	200	V
			* 15.594278	55.53	PK-U	40.40	0.00	-42.43	53.50	-	-	74	-20.5	0	200	V
			* 2.683330	46.30	ADR	32.20	0.00	-46.87	31.63	54	-22.37	-	-	0	100	H
			* 2.689509	57.77	PK-U	32.20	0.00	-46.80	43.17	-	-	74	-30.83	0	100	V
			* 2.692436	46.12	ADR	32.20	0.00	-46.74	31.58	54	-22.42	-	-	0	100	V
			* 2.693263	57.85	PK-U	32.20	0.00	-46.80	43.25	-	-	74	-30.75	0	100	H
			* 8.144544	53.97	PK-U	36.10	0.00	-42.91	47.16	-	-	74	-26.84	0	200	V
			* 8.150178	54.26	PK-U	36.10	0.00	-42.88	47.48	-	-	74	-26.52	0	100	H
			* 8.178418	42.29	ADR	36.10	0.00	-42.76	35.63	54	-18.37	-	-	0	100	H
			* 8.178806	42.22	ADR	36.10	0.00	-42.72	35.60	54	-18.4	-	-	0	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

40MHz

UNII-2A (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT40 SU Mode	5270	6+5	2.018833	58.18	PK-U	31.50	0.00	-46.50	43.18	-	-	68.2	-25.02	360	101	H
			2.032660	58.45	PK-U	31.50	0.00	-46.40	43.55	-	-	68.2	-24.65	360	200	V
			3.114484	56.68	PK-U	33.10	0.00	-45.90	43.88	-	-	68.2	-24.32	360	200	V
			3.153624	56.96	PK-U	33.00	0.00	-45.64	44.32	-	-	68.2	-23.88	360	200	H
			10.106833	54.49	PK-U	37.70	0.00	-42.12	50.07	-	-	68.2	-18.13	360	200	H
	5310		10.118581	54.39	PK-U	37.70	0.00	-41.64	50.45	-	-	68.2	-17.75	360	200	V
			1.967597	58.23	PK-U	31.30	0.00	-46.26	43.27	-	-	68.2	-24.93	360	200	V
			1.977219	58.49	PK-U	31.40	0.00	-46.50	43.39	-	-	68.2	-24.81	360	101	H
			3.100818	56.31	PK-U	33.10	0.00	-46.02	43.39	-	-	68.2	-24.81	360	200	V
			3.134207	56.71	PK-U	33.00	0.00	-45.98	43.73	-	-	68.2	-24.47	360	200	H
			10.050669	54.52	PK-U	37.70	0.00	-42.87	49.35	-	-	68.2	-18.85	360	200	V
			10.065366	54.08	PK-U	37.70	0.00	-42.64	49.14	-	-	68.2	-19.06	360	200	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

80MHz

UNII-2A (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filtr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT80 SU Mode	5290	6+5	* 16.092029	54.22	PK-U	40.30	0.00	-42.40	52.12	-	-	74	-21.88	360	200	H
			* 16.101174	42.72	ADR	40.30	0.00	-42.62	40.40	54	-13.6	-	-	360	101	V
			* 16.109997	54.17	PK-U	40.30	0.00	-42.50	51.97	-	-	74	-22.03	360	101	V
			* 16.115398	42.67	ADR	40.30	0.00	-42.40	40.57	54	-13.43	-	-	360	200	H
			* 2.796904	46.89	ADR	32.40	0.00	-47.20	32.09	54	-21.91	-	-	360	200	H
			* 2.797751	58.32	PK-U	32.40	0.00	-47.20	43.52	-	-	74	-30.48	360	200	H
			* 2.798099	46.89	ADR	32.40	0.00	-47.20	32.09	54	-21.91	-	-	360	200	V
			* 2.802439	58.36	PK-U	32.50	0.00	-47.20	43.66	-	-	74	-30.34	360	200	V
			8.510572	54.35	PK-U	36.10	0.00	-42.86	47.59	-	-	68.2	-20.61	360	101	V
			8.517990	53.63	PK-U	36.10	0.00	-42.90	46.83	-	-	68.2	-21.37	360	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

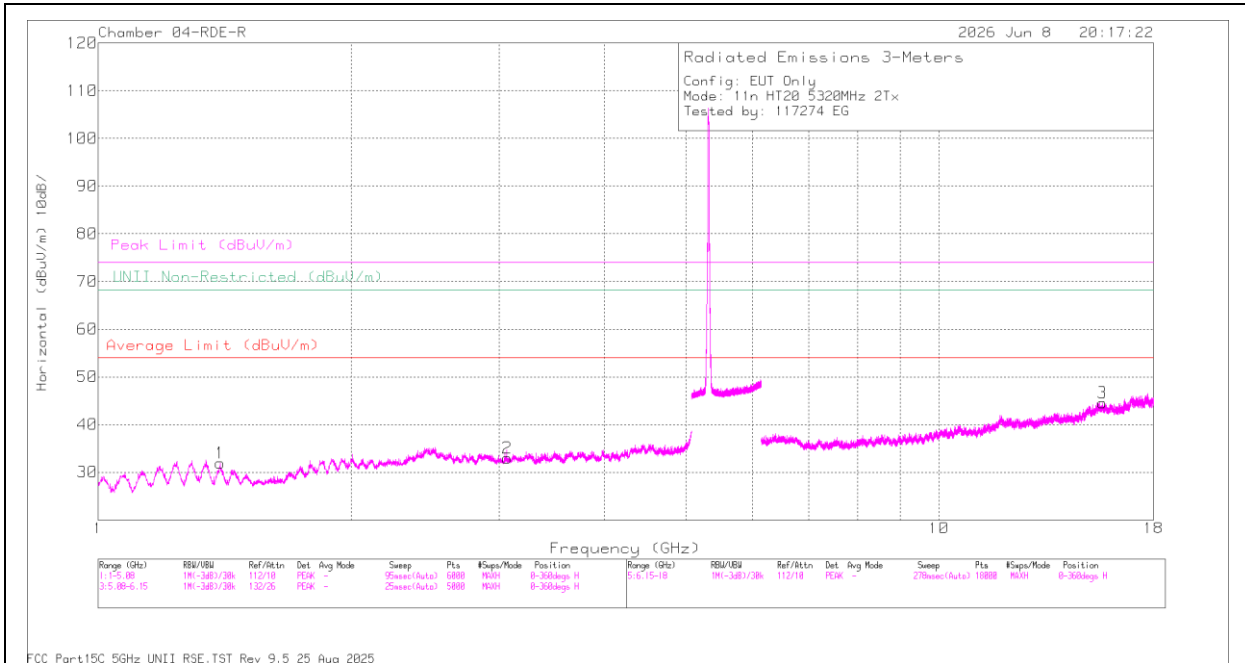
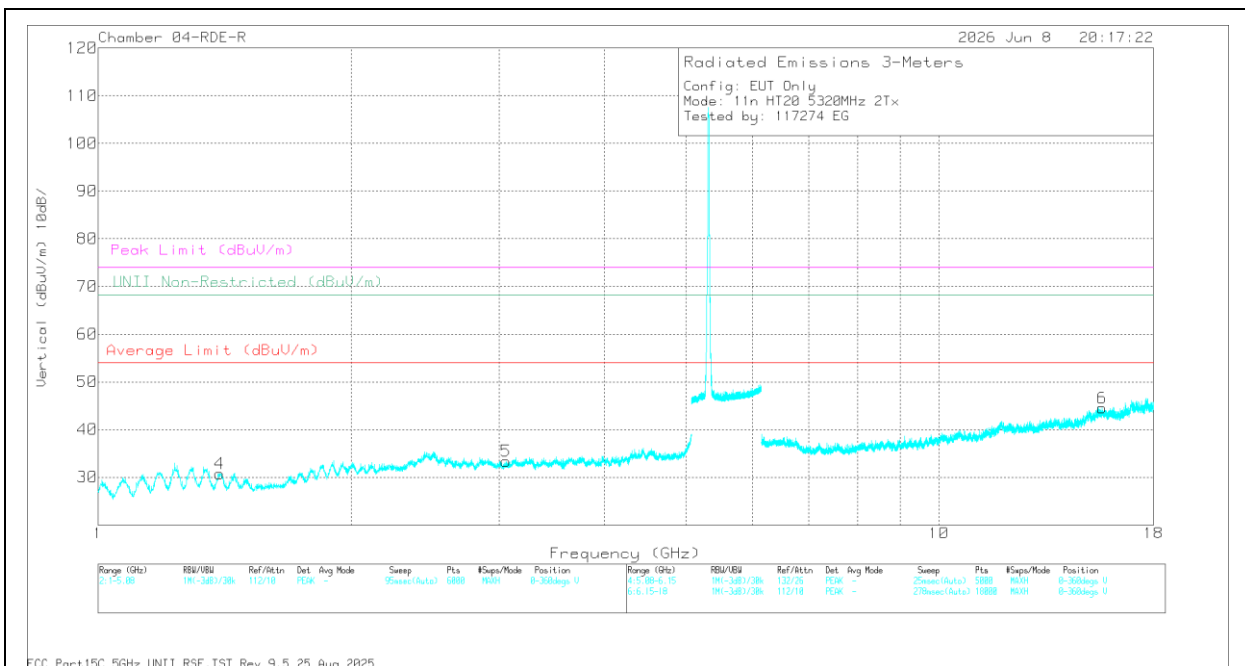
1.1.54. 802.11be MIMO PARTIAL RU MODE IN UNII-2A BAND – SPURIOUS EMISSIONS

UNII-2A (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filtr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 52T - RU37	5260	6+5	* 8.266540	55.99	PK-U	36.00	0.00	-44.63	47.36	-	-	74	-26.64	360	101	H
			* 8.257998	43.49	ADR	36.00	0.00	-44.49	35.00	54	-19	-	-	360	101	H
			* 8.261486	54.37	PK-U	36.00	0.00	-44.48	45.89	-	-	74	-28.11	360	200	V
			* 8.264464	42.87	ADR	36.00	0.00	-44.56	34.31	54	-19.69	-	-	360	200	V
			3.081009	57.92	PK-U	33.00	0.00	-47.85	43.07	-	-	68.2	-25.13	360	199	V
			3.099389	57.20	PK-U	33.00	0.00	-47.81	42.39	-	-	68.2	-25.81	360	101	H
			14.070892	52.57	PK-U	39.50	0.00	-42.62	49.45	-	-	68.2	-18.75	360	101	H
			14.080156	53.07	PK-U	39.50	0.00	-42.62	49.95	-	-	68.2	-18.25	360	101	V
EHT20 52T - RU38	5300	6+5	* 8.092511	55.01	PK-U	35.90	0.00	-44.81	46.10	-	-	74	-27.9	360	101	H
			* 8.093591	43.42	ADR	35.90	0.00	-44.79	34.53	54	-19.47	-	-	360	101	H
			* 8.108779	54.84	PK-U	35.90	0.00	-44.86	45.88	-	-	74	-28.12	360	101	V
			* 8.093321	43.35	ADR	35.90	0.00	-44.79	34.46	54	-19.54	-	-	360	101	V
			3.005773	57.72	PK-U	32.80	0.00	-47.96	42.56	-	-	68.2	-25.64	360	101	H
			3.009426	57.90	PK-U	32.80	0.00	-48.02	42.68	-	-	68.2	-25.52	360	200	V
			13.670796	51.74	PK-U	39.30	0.00	-42.48	48.56	-	-	68.2	-19.64	360	101	H
			13.673753	52.34	PK-U	39.30	0.00	-42.42	49.22	-	-	68.2	-18.98	360	101	V
EHT20 52T - RU40	5320	6+5	* 8.259470	54.57	PK-U	36.00	0.00	-44.46	46.11	-	-	74	-27.89	360	101	H
			* 8.257639	43.17	ADR	36.00	0.00	-44.49	34.68	54	-19.32	-	-	360	101	H
			* 8.254627	54.84	PK-U	36.00	0.00	-44.58	46.26	-	-	74	-27.74	360	101	V
			* 8.253352	43.27	ADR	35.90	0.00	-44.61	34.56	54	-19.44	-	-	360	101	V
			3.035202	58.16	PK-U	32.90	0.00	-47.63	43.43	-	-	68.2	-24.77	360	101	H
			3.041163	57.72	PK-U	32.90	0.00	-47.69	42.93	-	-	68.2	-25.27	360	101	V
			13.910512	52.13	PK-U	39.40	0.00	-42.82	48.71	-	-	68.2	-19.49	360	101	H
			13.910885	52.38	PK-U	39.40	0.00	-42.82	48.96	-	-	68.2	-19.24	360	101	V
EHT80 484+242T - RU92	5290	6+5	* 1.342934	50.53	ADR	29.80	0.00	-50.04	30.29	54	-23.71	-	-	24	318	V
			* 1.344146	61.74	PK-U	29.80	0.00	-50.05	41.49	-	-	74	-32.51	360	100	H
			* 1.346906	50.44	ADR	29.80	0.00	-50.05	30.19	54	-23.81	-	-	360	100	H
			* 1.347487	61.84	PK-U	29.80	0.00	-50.05	41.59	-	-	74	-32.41	24	318	V
			* 4.289908	58.96	PK-U	34.20	0.00	-48.25	44.91	-	-	74	-29.09	24	318	H
			* 4.305868	47.19	ADR	34.30	0.00	-48.31	33.18	54	-20.82	-	-	24	318	H
			* 4.640873	58.30	PK-U	34.20	0.00	-47.58	44.92	-	-	74	-29.08	213	187	V
			* 4.673846	46.92	ADR	34.20	0.00	-47.78	33.34	54	-20.66	-	-	213	187	V
			13.760707	54.96	PK-U	39.60	0.00	-43.03	51.53	-	-	68.2	-16.67	213	187	V
			13.799801	54.76	PK-U	39.60	0.00	-42.93	51.43	-	-	68.2	-16.77	213	187	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

WORST-CASE HARMONICS AND SPURIOUS EMISSIONS**802.11n HT20 / 5320 MHz / 2TX CDD****HORIZONTAL****VERTICAL**

Radiated Emissions

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filt/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.394903	61.27	PK-U	29.30	0.00	-50.00	40.57	-	-	74	-33.43	0	100	H
4	* 1.397702	61.56	PK-U	29.30	0.00	-49.99	40.87	-	-	74	-33.13	0	201	V
1	* 1.397743	50.02	ADR	29.30	0.00	-49.99	29.33	54	-24.67	-	-	0	100	H
4	* 1.398149	50.06	ADR	29.30	0.00	-49.99	29.37	54	-24.63	-	-	0	201	V
3	* 15.642062	43.69	ADR	41.40	0.00	-42.70	42.39	54	-11.61	-	-	0	200	H
6	* 15.642995	55.34	PK-U	41.40	0.00	-42.72	54.02	-	-	74	-19.98	0	200	V
3	* 15.644342	55.16	PK-U	41.40	0.00	-42.67	53.89	-	-	74	-20.11	0	200	H
6	* 15.64439	43.89	ADR	41.40	0.00	-42.67	42.62	54	-11.38	-	-	0	200	V
2	3.062234	57.56	PK-U	33.00	0.00	-47.50	43.06	-	-	68.2	-25.14	0	100	H
5	3.065465	58.05	PK-U	33.00	0.00	-47.53	43.52	-	-	68.2	-24.68	0	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.1.55. 802.11n/ac SISO MODE IN UNII-2C BAND – BANDEDGE**20MHz**

UNII-2C (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
HT20	5500	6	* 5.460000	57.40	Pk	34.30	0.00	-38.10	53.60	-	-	74	-20.40	151	195	H
			* 5.453955	59.73	Pk	34.30	0.00	-38.10	55.93	-	-	74	-18.07	151	195	H
			* 5.460000	47.42	RMS	34.30	0.00	-38.10	43.62	54	-10.38	-	-	151	195	H
			* 5.454888	47.87	RMS	34.30	0.00	-38.10	44.07	54	-9.93	-	-	151	195	H
			* 5.454888	47.87	RMS	34.30	0.00	-38.10	44.07	54	-9.93	-	-	151	195	H
			5.469688	66.98	Pk	34.30	0.00	-38.10	63.18	-	-	68.2	-5.02	151	195	H
			5.470000	65.72	Pk	34.30	0.00	-38.10	61.92	-	-	68.2	-6.28	151	195	H
			5.470000	47.34	RMS	34.30	0.00	-38.10	43.54	-	-	-	-	151	195	H
			* 5.460000	56.66	Pk	34.30	0.00	-38.10	52.86	-	-	74	-21.14	205	139	V
			* 5.435332	60.12	Pk	34.30	0.00	-38.20	56.22	-	-	74	-17.78	205	139	V
			* 5.460000	46.07	RMS	34.30	0.00	-38.10	42.27	54	-11.73	-	-	205	139	V
			* 5.454732	47.49	RMS	34.30	0.00	-38.10	43.69	54	-10.31	-	-	205	139	V
			* 5.454732	47.49	RMS	34.30	0.00	-38.10	43.69	54	-10.31	-	-	205	139	V
			5.468821	59.01	Pk	34.30	0.00	-38.10	55.21	-	-	68.2	-12.99	205	139	V
			5.470000	58.21	Pk	34.30	0.00	-38.10	54.41	-	-	68.2	-13.79	205	139	V
			5.470000	45.93	RMS	34.30	0.00	-38.10	42.13	-	-	-	-	205	139	V
		5	* 5.460000	58.38	Pk	34.30	0.00	-38.10	54.58	-	-	74	-19.42	147	136	H
			* 5.456221	60.07	Pk	34.30	0.00	-38.10	56.27	-	-	74	-17.73	147	136	H
			* 5.460000	47.17	RMS	34.30	0.00	-38.10	43.37	54	-10.63	-	-	147	136	H
			* 5.456510	48.38	RMS	34.30	0.00	-38.10	44.58	54	-9.42	-	-	147	136	H
			* 5.456510	48.38	RMS	34.30	0.00	-38.10	44.58	54	-9.42	-	-	147	136	H
			5.468732	66.75	Pk	34.30	0.00	-38.10	62.95	-	-	68.2	-5.25	147	136	H
			5.470000	64.05	Pk	34.30	0.00	-38.10	60.25	-	-	68.2	-7.95	147	136	H
			5.470000	48.23	RMS	34.30	0.00	-38.10	44.43	-	-	-	-	147	136	H
			* 5.460000	57.05	Pk	34.30	0.00	-38.10	53.25	-	-	74	-20.75	232	180	V
			* 5.429599	59.70	Pk	34.30	0.00	-38.20	55.80	-	-	74	-18.20	232	180	V
			* 5.460000	46.51	RMS	34.30	0.00	-38.10	42.71	54	-11.29	-	-	232	180	V
			* 5.420577	47.54	RMS	34.30	0.00	-38.14	43.70	54	-10.30	-	-	232	180	V
			* 5.420577	47.54	RMS	34.30	0.00	-38.14	43.70	54	-10.30	-	-	232	180	V
			5.469377	61.73	Pk	34.30	0.00	-38.10	57.93	-	-	68.2	-10.27	232	180	V
			5.470000	59.54	Pk	34.30	0.00	-38.10	55.74	-	-	68.2	-12.46	232	180	V
			5.470000	46.80	RMS	34.30	0.00	-38.10	43.00	-	-	-	-	232	180	V
	5700	6	5.725000	62.51	Pk	35.10	0.00	-35.06	62.55	-	-	68.2	-5.65	36	215	H
			5.726596	63.36	Pk	35.10	0.00	-35.04	63.42	-	-	68.2	-4.78	36	215	H
			5.725000	62.38	Pk	35.10	0.00	-35.06	62.42	-	-	68.2	-5.78	19	383	V
			5.725548	63.04	Pk	35.10	0.00	-35.06	63.08	-	-	68.2	-5.12	19	383	V
		5	5.725000	63.72	Pk	34.40	0.00	-37.60	60.52	-	-	68.2	-7.68	158	135	H
			5.725317	66.15	Pk	34.40	0.00	-37.60	62.95	-	-	68.2	-5.25	158	135	H
			5.725000	61.59	Pk	34.40	0.00	-37.60	58.39	-	-	68.2	-9.81	234	191	V
			5.726178	63.32	Pk	34.40	0.00	-37.60	60.12	-	-	68.2	-8.08	234	191	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

40MHz

UNII-2C (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Ftr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
HT40	5510	6	* 5.460000	59.60	Pk	34.30	0.00	-38.10	55.80	-	-	74	-18.20	153	261	H
			* 5.459710	63.29	Pk	34.30	0.00	-38.10	59.49	-	-	74	-14.51	153	261	H
			* 5.460000	46.47	RMS	34.30	0.00	-38.10	42.67	54	-11.33	-	-	153	261	H
			* 5.458377	47.98	RMS	34.30	0.00	-38.10	44.18	54	-9.82	-	-	153	261	H
			* 5.458377	47.98	RMS	34.30	0.00	-38.10	44.18	54	-9.82	-	-	153	261	H
			5.469821	67.23	Pk	34.30	0.00	-38.10	63.43	-	-	68.2	-4.77	153	261	H
			5.470000	64.59	Pk	34.30	0.00	-38.10	60.79	-	-	68.2	-7.41	153	261	H
			5.470000	47.46	RMS	34.30	0.00	-38.10	43.66	-	-	-	-	153	261	H
			* 5.460000	57.07	Pk	34.30	0.00	-38.10	53.27	-	-	74	-20.73	158	130	V
			* 5.448132	59.88	Pk	34.30	0.00	-38.10	56.08	-	-	74	-17.92	158	130	V
			* 5.460000	46.83	RMS	34.30	0.00	-38.10	43.03	54	-10.97	-	-	158	130	V
			* 5.398688	47.55	RMS	34.30	0.00	-38.20	43.65	54	-10.35	-	-	158	130	V
			* 5.398688	47.55	RMS	34.30	0.00	-38.20	43.65	54	-10.35	-	-	158	130	V
			5.468910	59.17	Pk	34.30	0.00	-38.10	55.37	-	-	68.2	-12.83	158	130	V
			5.470000	58.81	Pk	34.30	0.00	-38.10	55.01	-	-	68.2	-13.19	158	130	V
			5.470000	46.27	RMS	34.30	0.00	-38.10	42.47	-	-	-	-	158	130	V
		5	* 5.460000	60.08	Pk	34.30	0.00	-38.10	56.28	-	-	74	-17.72	157	126	H
			* 5.459821	64.25	Pk	34.30	0.00	-38.10	60.45	-	-	74	-13.55	157	126	H
			* 5.460000	48.38	RMS	34.30	0.00	-38.10	44.58	54	-9.42	-	-	157	126	H
			* 5.459399	48.87	RMS	34.30	0.00	-38.10	45.07	54	-8.93	-	-	157	126	H
			* 5.459399	48.87	RMS	34.30	0.00	-38.10	45.07	54	-8.93	-	-	157	126	H
			5.469377	67.45	Pk	34.30	0.00	-38.10	63.65	-	-	68.2	-4.55	157	126	H
			5.470000	65.52	Pk	34.30	0.00	-38.10	61.72	-	-	68.2	-6.48	157	126	H
			5.470000	49.88	RMS	34.30	0.00	-38.10	46.08	-	-	-	-	157	126	H
			* 5.460000	59.84	Pk	34.30	0.00	-38.10	56.04	-	-	74	-17.96	227	141	V
			* 5.459999	59.99	Pk	34.30	0.00	-38.10	56.19	-	-	74	-17.81	227	141	V
			* 5.460000	46.80	RMS	34.30	0.00	-38.10	43.00	54	-11.00	-	-	227	141	V
			* 5.451399	47.79	RMS	34.30	0.00	-38.10	43.99	54	-10.01	-	-	227	141	V
			* 5.451399	47.79	RMS	34.30	0.00	-38.10	43.99	54	-10.01	-	-	227	141	V
			5.468665	62.98	Pk	34.30	0.00	-38.10	59.18	-	-	68.2	-9.02	227	141	V
			5.470000	58.98	Pk	34.30	0.00	-38.10	55.18	-	-	68.2	-13.02	227	141	V
			5.470000	47.64	RMS	34.30	0.00	-38.10	43.84	-	-	-	-	227	141	V
	5670	6	5.725000	63.94	Pk	34.40	0.00	-37.60	60.74	-	-	68.2	-7.46	156	192	H
			5.727384	66.88	Pk	34.40	0.00	-37.60	63.68	-	-	68.2	-4.52	156	192	H
			5.725000	62.47	Pk	34.40	0.00	-37.60	59.27	-	-	68.2	-8.93	207	163	V
			5.729812	63.51	Pk	34.40	0.00	-37.60	60.31	-	-	68.2	-7.89	207	163	V
		5	5.725000	64.99	Pk	34.60	0.00	-38.47	61.12	-	-	68.2	-7.08	128	114	H
			5.727435	67.26	Pk	34.60	0.00	-38.48	63.38	-	-	68.2	-4.82	128	114	H
			5.725000	58.97	Pk	34.60	0.00	-38.47	55.10	-	-	68.2	-13.10	130	167	V
			5.726402	61.29	Pk	34.60	0.00	-38.45	57.44	-	-	68.2	-10.76	130	167	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

80MHz

UNII-2C (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Ftr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
VHT80	5530	6	* 5.460000	56.44	Pk	34.50	0.00	-34.10	56.84	-	-	74	-17.16	190	307	H
			* 5.457538	58.59	Pk	34.50	0.00	-34.10	58.99	-	-	74	-15.01	190	307	H
			5.470000	61.84	Pk	34.50	0.00	-34.10	62.24	-	-	68.2	-5.96	190	307	H
			5.469239	62.82	Pk	34.50	0.00	-34.10	63.22	-	-	68.2	-4.98	190	307	H
			* 5.460000	41.60	RMS	34.50	0.00	-34.10	42.00	54	-12	-	-	190	307	H
			* 5.458863	43.19	RMS	34.50	0.00	-34.10	43.59	54	-10.41	-	-	190	307	H
			5.470000	42.21	RMS	34.50	0.00	-34.10	42.61	-	-	-	-	190	307	H
			* 5.458863	43.19	RMS	34.50	0.00	-34.10	43.59	54	-10.41	-	-	190	307	H
			* 5.460000	52.36	Pk	34.50	0.00	-34.10	52.76	-	-	74	-21.24	235	103	V
			* 5.450262	54.77	Pk	34.50	0.00	-34.10	55.17	-	-	74	-18.83	235	103	V
			5.470000	53.67	Pk	34.50	0.00	-34.10	54.07	-	-	68.2	-14.13	235	103	V
			5.469364	55.71	Pk	34.50	0.00	-34.10	56.11	-	-	68.2	-12.09	235	103	V
			* 5.460000	41.36	RMS	34.50	0.00	-34.10	41.76	54	-12.24	-	-	235	103	V
			* 5.450662	42.55	RMS	34.50	0.00	-34.10	42.95	54	-11.05	-	-	235	103	V
			5.470000	41.57	RMS	34.50	0.00	-34.10	41.97	-	-	-	-	235	103	V
			* 5.450662	42.55	RMS	34.50	0.00	-34.10	42.95	54	-11.05	-	-	235	103	V
		5	* 5.460000	56.22	Pk	34.40	0.00	-32.57	58.05	-	-	74	-15.95	313	104	H
			* 5.457866	58.54	Pk	34.40	0.00	-32.56	60.38	-	-	74	-13.62	313	104	H
			* 5.460000	45.11	RMS	34.40	0.00	-32.57	46.94	54	-7.06	-	-	313	104	H
			* 5.458710	46.35	RMS	34.40	0.00	-32.58	48.17	54	-5.83	-	-	313	104	H
			* 5.458710	46.35	RMS	34.40	0.00	-32.58	48.17	54	-5.83	-	-	313	104	H
			5.468399	61.77	Pk	34.40	0.00	-32.52	63.65	-	-	68.2	-4.55	313	104	H
			5.470000	57.36	Pk	34.40	0.00	-32.54	59.22	-	-	68.2	-8.98	313	104	H
			5.470000	46.37	RMS	34.40	0.00	-32.54	48.23	-	-	-	-	313	104	H
			* 5.460000	55.66	Pk	34.40	0.00	-32.57	57.49	-	-	74	-16.51	65	188	V
			* 5.391600	56.76	Pk	34.50	0.00	-32.59	58.67	-	-	74	-15.33	65	188	V
			* 5.460000	43.81	RMS	34.40	0.00	-32.57	45.64	54	-8.36	-	-	65	188	V
			* 5.365600	44.74	RMS	34.60	0.00	-32.64	46.70	54	-7.30	-	-	65	188	V
			* 5.365600	44.74	RMS	34.60	0.00	-32.64	46.70	54	-7.30	-	-	65	188	V
			5.469199	57.15	Pk	34.40	0.00	-32.53	59.02	-	-	68.2	-9.18	65	188	V
			5.470000	54.91	Pk	34.40	0.00	-32.54	56.77	-	-	68.2	-11.43	65	188	V
			5.470000	44.03	RMS	34.40	0.00	-32.54	45.89	-	-	-	-	65	188	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

160MHz

UNII-2C (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Ftr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
VHT160	5570 (Lower)	6	* 5.460000	57.11	Pk	34.90	0.00	-30.60	61.41	-	-	74	-12.59	325	189	H
			* 5.442161	62.48	Pk	34.90	0.00	-30.60	66.78	-	-	74	-7.22	325	189	H
			5.470000	55.15	Pk	34.90	0.00	-30.60	59.45	-	-	68.2	-8.75	325	189	H
			5.461338	58.87	Pk	34.90	0.00	-30.60	63.17	-	-	68.2	-5.03	325	189	H
			* 5.460000	40.95	RMS	34.90	0.10	-30.60	45.35	54	-8.65	-	-	325	189	H
			* 5.444036	42.75	RMS	34.90	0.10	-30.70	47.05	54	-6.95	-	-	325	189	H
			5.470000	40.65	RMS	34.90	0.10	-30.60	45.05	-	-	-	-	325	189	H
			* 5.444036	42.75	RMS	34.90	0.10	-30.70	47.05	54	-6.95	-	-	325	189	H
			* 5.460000	50.30	Pk	34.90	0.00	-30.60	54.60	-	-	74	-19.40	43	399	V
			* 5.440836	56.63	Pk	34.90	0.00	-30.70	60.83	-	-	74	-13.17	43	399	V
			5.470000	50.07	Pk	34.90	0.00	-30.60	54.37	-	-	68.2	-13.83	43	399	V
			5.462914	52.14	Pk	34.90	0.00	-30.60	56.44	-	-	68.2	-11.76	43	399	V
			* 5.460000	39.67	RMS	34.90	0.10	-30.60	44.07	54	-9.93	-	-	43	399	V
			* 5.437486	40.96	RMS	35.00	0.10	-30.60	45.46	54	-8.54	-	-	43	399	V
			5.470000	39.31	RMS	34.90	0.10	-30.60	43.71	-	-	-	-	43	399	V
			* 5.437486	40.96	RMS	35.00	0.10	-30.60	45.46	54	-8.54	-	-	43	399	V
		5	* 5.460000	60.94	Pk	34.50	0.00	-34.10	61.34	-	-	74	-12.66	220	129	H
			* 5.442336	65.92	Pk	34.50	0.00	-34.00	66.42	-	-	74	-7.58	220	129	H
			5.470000	58.80	Pk	34.50	0.00	-34.10	59.20	-	-	68.2	-9.00	220	129	H
			5.462313	62.92	Pk	34.50	0.00	-34.10	63.32	-	-	68.2	-4.88	220	129	H
			* 5.460000	42.69	RMS	34.50	0.10	-34.10	43.19	54	-10.81	-	-	220	129	H
			* 5.445486	44.89	RMS	34.50	0.10	-34.00	45.49	54	-8.51	-	-	220	129	H
			5.470000	42.27	RMS	34.50	0.00	-34.10	42.67	-	-	-	-	220	129	H
			* 5.445486	44.89	RMS	34.50	0.10	-34.00	45.49	54	-8.51	-	-	220	129	H
			* 5.460000	52.90	Pk	34.50	0.00	-34.10	53.30	-	-	74	-20.70	271	232	V
			* 5.438736	58.78	Pk	34.50	0.00	-34.10	59.18	-	-	74	-14.82	271	232	V
			5.470000	53.51	Pk	34.50	0.00	-34.10	53.91	-	-	68.2	-14.29	271	232	V
			5.462689	57.48	Pk	34.50	0.00	-34.10	57.88	-	-	68.2	-10.32	271	232	V
			* 5.460000	42.07	RMS	34.50	0.10	-34.10	42.57	54	-11.43	-	-	271	232	V
			* 5.447962	43.08	RMS	34.50	0.10	-34.10	43.58	54	-10.42	-	-	271	232	V
			5.470000	42.27	RMS	34.50	0.00	-34.10	42.67	-	-	-	-	271	232	V
			* 5.447962	43.08	RMS	34.50	0.10	-34.10	43.58	54	-10.42	-	-	271	232	V
	5570 (Upper)	6	5.725000	61.44	Pk	34.70	0.00	-33.90	62.24	-	-	68.2	-5.96	223	303	H
			5.725251	62.10	Pk	34.70	0.00	-33.90	62.90	-	-	68.2	-5.30	223	303	H
			5.725000	57.17	Pk	34.70	0.00	-33.90	57.97	-	-	68.2	-10.23	267	107	V
			5.725251	59.24	Pk	34.70	0.00	-33.90	60.04	-	-	68.2	-8.16	267	107	V
		5	5.725000	57.65	Pk	34.60	0.00	-30.20	62.05	-	-	68.2	-6.15	328	123	H
			5.726845	58.57	Pk	34.60	0.00	-30.10	63.07	-	-	68.2	-5.13	328	123	H
			5.725000	49.71	Pk	34.60	0.00	-30.20	54.11	-	-	68.2	-14.09	25	186	V
			5.727036	52.88	Pk	34.60	0.00	-30.10	57.38	-	-	68.2	-10.82	25	186	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.56. 802.11n/ac MIMO MODE IN UNII-2C BAND – BANDEDGE**20MHz**

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
HT20	5500	6+5	* 5.460000	58.35	Pk	34.30	0.00	-38.10	54.55	-	-	74	-19.45	147	130	H
			* 5.447555	61.69	Pk	34.30	0.00	-38.10	57.89	-	-	74	-16.11	147	130	H
			* 5.460000	47.17	RMS	34.30	0.00	-38.10	43.37	54	-10.63	-	-	147	130	H
			* 5.443310	48.33	RMS	34.30	0.00	-38.10	44.53	54	-9.47	-	-	147	130	H
			* 5.443310	48.33	RMS	34.30	0.00	-38.10	44.53	54	-9.47	-	-	147	130	H
			5.466754	66.79	Pk	34.30	0.00	-38.10	62.99	-	-	68.2	-5.21	147	130	H
			5.470000	63.05	Pk	34.30	0.00	-38.10	59.25	-	-	68.2	-8.95	147	130	H
			5.470000	48.66	RMS	34.30	0.00	-38.10	44.86	-	-	-	-	147	130	H
			* 5.460000	57.36	Pk	34.30	0.00	-38.10	53.56	-	-	74	-20.44	160	387	V
			* 5.368089	59.93	Pk	34.40	0.00	-38.20	56.13	-	-	74	-17.87	160	387	V
			* 5.460000	46.89	RMS	34.30	0.00	-38.10	43.09	54	-10.91	-	-	160	387	V
			* 5.454332	47.53	RMS	34.30	0.00	-38.10	43.73	54	-10.27	-	-	160	387	V
			* 5.454332	47.53	RMS	34.30	0.00	-38.10	43.73	54	-10.27	-	-	160	387	V
			5.465888	59.10	Pk	34.30	0.00	-38.10	55.30	-	-	68.2	-12.90	160	387	V
			5.470000	57.11	Pk	34.30	0.00	-38.10	53.31	-	-	68.2	-14.89	160	387	V
			5.470000	45.96	RMS	34.30	0.00	-38.10	42.16	-	-	-	-	160	387	V
	5700		5.725000	63.33	Pk	34.40	0.00	-37.60	60.13	-	-	68.2	-8.07	148	187	H
			5.725644	66.43	Pk	34.40	0.00	-37.60	63.23	-	-	68.2	-4.97	148	187	H
			5.725000	57.41	Pk	34.40	0.00	-37.60	54.21	-	-	68.2	-13.99	142	356	V
			5.816852	59.50	Pk	34.60	0.00	-37.30	56.80	-	-	68.2	-11.40	142	356	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

40MHz

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
HT40	5510	6+5	* 5.460000	55.95	Pk	34.80	0.00	-34.90	55.85	-	-	74	-18.15	227	201	H
			* 5.456021	59.90	Pk	34.80	0.00	-34.90	59.80	-	-	74	-14.20	227	201	H
			5.470000	58.46	Pk	34.80	0.00	-34.80	58.46	-	-	68.2	-9.74	227	201	H
			5.466399	63.18	Pk	34.80	0.00	-34.90	63.08	-	-	68.2	-5.12	227	201	H
			* 5.460000	44.63	RMS	34.80	0.00	-34.90	44.53	54	-9.47	-	-	227	201	H
			* 5.452155	45.70	RMS	34.80	0.00	-34.90	45.60	54	-8.40	-	-	227	201	H
			5.470000	46.15	RMS	34.80	0.00	-34.80	46.15	-	-	-	-	227	201	H
			* 5.452155	45.70	RMS	34.80	0.00	-34.90	45.60	54	-8.40	-	-	227	201	H
			* 5.460000	55.04	Pk	34.80	0.00	-34.90	54.94	-	-	74	-19.06	302	223	V
			* 5.366755	57.46	Pk	34.80	0.00	-35.00	57.26	-	-	74	-16.74	302	223	V
			5.470000	54.89	Pk	34.80	0.00	-34.80	54.89	-	-	68.2	-13.31	302	223	V
			5.469754	57.23	Pk	34.80	0.00	-34.80	57.23	-	-	68.2	-10.97	302	223	V
			* 5.460000	44.40	RMS	34.80	0.00	-34.90	44.30	54	-9.70	-	-	302	223	V
			* 5.453088	45.40	RMS	34.80	0.00	-34.90	45.30	54	-8.70	-	-	302	223	V
			5.470000	44.44	RMS	34.80	0.00	-34.80	44.44	-	-	-	-	302	223	V
	* 5.453088		45.40	RMS	34.80	0.00	-34.90	45.30	54	-8.70	-	-	302	223	V	
	5670		5.725000	58.19	Pk	34.90	0.00	-34.60	58.49	-	-	68.2	-9.71	240	148	H
			5.727384	63.07	Pk	34.90	0.00	-34.60	63.37	-	-	68.2	-4.83	240	148	H
			5.725000	56.52	Pk	34.90	0.00	-34.60	56.82	-	-	68.2	-11.38	309	213	V
			5.725782	59.70	Pk	34.90	0.00	-34.60	60.00	-	-	68.2	-8.20	309	213	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

80MHz

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filtr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
VHT80	5530	6+5	* 5.460000	56.14	Pk	34.40	0.00	-32.57	57.97	-	-	74	-16.03	317	148	H
			* 5.445621	58.68	Pk	34.40	0.00	-32.54	60.54	-	-	74	-13.46	317	148	H
			* 5.460000	44.95	RMS	34.40	0.00	-32.57	46.78	54	-7.22	-	-	317	148	H
			* 5.459932	46.38	RMS	34.40	0.00	-32.57	48.21	54	-5.79	-	-	317	148	H
			* 5.459932	46.38	RMS	34.40	0.00	-32.57	48.21	54	-5.79	-	-	317	148	H
			* 5.469954	61.25	Pk	34.40	0.00	-32.54	63.11	-	-	68.2	-5.09	317	148	H
			5.470000	60.37	Pk	34.40	0.00	-32.54	62.23	-	-	68.2	-5.97	317	148	H
			5.470000	45.79	RMS	34.40	0.00	-32.54	47.65	-	-	-	-	317	148	H
			* 5.460000	54.65	Pk	34.40	0.00	-32.57	56.48	-	-	74	-17.52	322	134	V
			* 5.438532	57.11	Pk	34.40	0.00	-32.51	59.00	-	-	74	-15.00	322	134	V
			* 5.460000	44.66	RMS	34.40	0.00	-32.57	46.49	54	-7.51	-	-	322	134	V
			* 5.450332	44.93	RMS	34.40	0.00	-32.51	46.82	54	-7.18	-	-	322	134	V
			* 5.450332	44.93	RMS	34.40	0.00	-32.51	46.82	54	-7.18	-	-	322	134	V
			* 5.469910	58.77	Pk	34.40	0.00	-32.54	60.63	-	-	68.2	-7.57	322	134	V
			5.470000	56.39	Pk	34.40	0.00	-32.54	58.25	-	-	68.2	-9.95	322	134	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

160MHz

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
VHT160	5570 (Lower)	6+5	* 5.460000	57.28	Pk	34.80	0.00	-34.90	57.18	-	-	74	-16.82	267	149	H
			* 5.442555	66.50	Pk	34.80	0.00	-34.90	66.40	-	-	74	-7.60	267	149	H
			5.470000	56.78	Pk	34.80	0.00	-34.80	56.78	-	-	68.2	-11.42	267	149	H
			5.461466	63.52	Pk	34.80	0.00	-34.90	63.42	-	-	68.2	-4.78	267	149	H
			* 5.460000	45.73	RMS	34.80	0.10	-34.90	45.73	54	-8.27	-	-	267	149	H
			* 5.439977	46.82	RMS	34.80	0.10	-34.90	46.82	54	-7.18	-	-	267	149	H
			5.470000	45.61	RMS	34.80	0.10	-34.80	45.71	-	-	-	-	267	149	H
			* 5.439977	46.82	RMS	34.80	0.10	-34.90	46.82	54	-7.18	-	-	267	149	H
			* 5.460000	56.18	Pk	34.80	0.00	-34.90	56.08	-	-	74	-17.92	267	149	V
			* 5.447866	61.12	Pk	34.80	0.00	-34.90	61.02	-	-	74	-12.98	267	149	V
			5.470000	55.29	Pk	34.80	0.00	-34.80	55.29	-	-	68.2	-12.91	267	149	V
			5.463132	58.02	Pk	34.80	0.00	-34.90	57.92	-	-	68.2	-10.28	267	149	V
			* 5.460000	44.21	RMS	34.80	0.10	-34.90	44.21	54	-9.79	-	-	267	149	V
			* 5.448577	45.54	RMS	34.80	0.10	-34.90	45.54	54	-8.46	-	-	267	149	V
			5.470000	44.36	RMS	34.80	0.10	-34.80	44.46	-	-	-	-	267	149	V
			* 5.448577	45.54	RMS	34.80	0.10	-34.90	45.54	54	-8.46	-	-	267	149	V
	5570 (Upper)		5.725000	58.59	Pk	34.90	0.00	-34.60	58.89	-	-	68.2	-9.31	266	174	H
			5.726285	63.33	Pk	34.90	0.00	-34.60	63.63	-	-	68.2	-4.57	266	174	H
			5.725000	56.44	Pk	34.90	0.00	-34.60	56.74	-	-	68.2	-11.46	342	241	V
			5.725067	58.17	Pk	34.90	0.00	-34.60	58.47	-	-	68.2	-9.73	342	241	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.57. 802.11be SISO SU MODE IN UNII-2C BAND – BANDEDGE**20MHz**

UNII-2C (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 SU Mode	5500	6	* 5.460000	55.03	Pk	34.60	0.00	-32.31	57.32	-	-	74	-16.68	155	201	H
			* 5.381489	57.58	Pk	34.60	0.00	-32.38	59.80	-	-	74	-14.20	155	201	H
			5.470000	59.63	Pk	34.60	0.00	-32.27	61.96	-	-	68.2	-6.24	155	201	H
			5.468999	61.26	Pk	34.60	0.00	-32.26	63.60	-	-	68.2	-4.60	155	201	H
			* 5.460000	44.28	RMS	34.60	0.00	-32.31	46.57	54	-7.43	-	-	155	201	H
			* 5.427399	45.47	RMS	34.60	0.00	-32.35	47.72	54	-6.28	-	-	155	201	H
			5.470000	44.35	RMS	34.60	0.00	-32.27	46.68	-	-	-	-	155	201	H
			* 5.427399	45.47	RMS	34.60	0.00	-32.35	47.72	54	-6.28	-	-	155	201	H
			* 5.460000	54.22	Pk	34.60	0.00	-32.31	56.51	-	-	74	-17.49	235	292	V
			* 5.421177	57.27	Pk	34.60	0.00	-32.38	59.49	-	-	74	-14.51	235	292	V
			5.470000	54.53	Pk	34.60	0.00	-32.27	56.86	-	-	68.2	-11.34	235	292	V
			5.462888	56.99	Pk	34.60	0.00	-32.28	59.31	-	-	68.2	-8.89	235	292	V
			* 5.460000	43.64	RMS	34.60	0.00	-32.31	45.93	54	-8.07	-	-	235	292	V
			* 5.368533	45.24	RMS	34.50	0.00	-32.36	47.38	54	-6.62	-	-	235	292	V
			5.470000	44.04	RMS	34.60	0.00	-32.27	46.37	-	-	-	-	235	292	V
			* 5.368533	45.24	RMS	34.50	0.00	-32.36	47.38	54	-6.62	-	-	235	292	V
		5	* 5.460000	54.77	Pk	34.40	0.00	-32.57	56.60	-	-	74	-17.40	141	118	H
			* 5.398711	57.23	Pk	34.50	0.00	-32.62	59.11	-	-	74	-14.89	141	118	H
			* 5.460000	43.62	RMS	34.40	0.00	-32.57	45.45	54	-8.55	-	-	141	118	H
			* 5.445732	45.34	RMS	34.40	0.00	-32.54	47.20	54	-6.80	-	-	141	118	H
			* 5.445732	45.34	RMS	34.40	0.00	-32.54	47.20	54	-6.80	-	-	141	118	H
			5.469888	61.80	Pk	34.40	0.00	-32.54	63.66	-	-	68.2	-4.54	141	118	H
			5.470000	57.31	Pk	34.40	0.00	-32.54	59.17	-	-	68.2	-9.03	141	118	H
			5.470000	44.50	RMS	34.40	0.00	-32.54	46.36	-	-	-	-	141	118	H
			* 5.460000	54.89	Pk	34.40	0.00	-32.57	56.72	-	-	74	-17.28	221	231	V
			* 5.399355	57.11	Pk	34.50	0.00	-32.63	58.98	-	-	74	-15.02	221	231	V
			* 5.460000	43.26	RMS	34.40	0.00	-32.57	45.09	54	-8.91	-	-	221	231	V
			* 5.436999	44.97	RMS	34.40	0.00	-32.51	46.86	54	-7.14	-	-	221	231	V
			* 5.436999	44.97	RMS	34.40	0.00	-32.51	46.86	54	-7.14	-	-	221	231	V
			5.468821	56.28	Pk	34.40	0.00	-32.53	58.15	-	-	68.2	-10.05	221	231	V
			5.470000	55.14	Pk	34.40	0.00	-32.54	57.00	-	-	68.2	-11.20	221	231	V
			5.470000	44.20	RMS	34.40	0.00	-32.54	46.06	-	-	-	-	221	231	V
	5700	6	5.725000	57.00	Pk	34.70	0.00	-31.75	59.95	-	-	68.2	-8.25	147	196	H
			5.725455	60.02	Pk	34.70	0.00	-31.74	62.98	-	-	68.2	-5.22	147	196	H
			5.725000	54.54	Pk	34.70	0.00	-31.75	57.49	-	-	68.2	-10.71	242	166	V
			5.783493	57.10	Pk	34.90	0.00	-31.73	60.27	-	-	68.2	-7.93	242	166	V
		5	5.725000	57.92	Pk	34.60	0.00	-32.20	60.32	-	-	68.2	-7.88	151	108	H
			5.728591	60.53	Pk	34.60	0.00	-32.17	62.96	-	-	68.2	-5.24	151	108	H
			5.725000	54.87	Pk	34.60	0.00	-32.20	57.27	-	-	68.2	-10.93	211	162	V
			5.798924	57.26	Pk	34.80	0.00	-31.99	60.07	-	-	68.2	-8.13	211	162	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

40MHz

UNII-2C (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT40 SU Mode	5510	6	* 5.460000	56.65	Pk	34.9	0	-30.6	60.95	-	-	74	-13.05	327	199	H
			* 5.459963	57.77	Pk	34.90	0.00	-30.60	62.07	-	-	74	-11.93	327	199	H
			5.470000	57.41	Pk	34.90	0.00	-30.60	61.71	-	-	68.2	-6.49	327	199	H
			5.469914	58.92	Pk	34.90	0.00	-30.60	63.22	-	-	68.2	-4.98	327	199	H
			* 5.460000	40.12	RMS	34.90	0.00	-30.60	44.42	54	-9.58	-	-	327	199	H
			* 5.371953	40.87	RMS	35.00	0.00	-30.70	45.17	54	-8.83	-	-	327	199	H
			5.470000	40.06	RMS	34.90	0.00	-30.60	44.36	-	-	-	-	327	199	H
			* 5.371953	40.87	RMS	35.00	0.00	-30.70	45.17	54	-8.83	-	-	327	199	H
			* 5.460000	50.70	Pk	34.90	0.00	-30.60	55.00	-	-	74	-19	8	154	V
			* 5.362076	53.04	Pk	35.00	0.00	-30.70	57.34	-	-	74	-16.66	8	154	V
			5.470000	50.87	Pk	34.90	0.00	-30.60	55.17	-	-	68.2	-13.03	8	154	V
			5.469789	53.32	Pk	34.90	0.00	-30.60	57.62	-	-	68.2	-10.58	8	154	V
			* 5.460000	39.38	RMS	34.90	0.00	-30.60	43.68	54	-10.32	-	-	8	154	V
			* 5.366777	40.97	RMS	34.90	0.00	-30.70	45.17	54	-8.83	-	-	8	154	V
			5.470000	39.69	RMS	34.90	0.00	-30.60	43.99	-	-	-	-	8	154	V
			* 5.366777	40.97	RMS	34.90	0.00	-30.70	45.17	54	-8.83	-	-	8	154	V
		5	* 5.460000	52.70	Pk	34.90	0.00	-30.60	57.00	-	-	74	-17.00	153	177	H
			* 5.457613	54.09	Pk	34.90	0.00	-30.60	58.39	-	-	74	-15.61	153	177	H
			5.470000	55.92	Pk	34.90	0.00	-30.60	60.22	-	-	68.2	-7.98	153	177	H
			5.469914	58.42	Pk	34.90	0.00	-30.60	62.72	-	-	68.2	-5.48	153	177	H
			* 5.460000	40.67	RMS	34.90	0.00	-30.60	44.97	54	-9.03	-	-	153	177	H
			* 5.459163	41.83	RMS	34.90	0.00	-30.60	46.13	54	-7.87	-	-	153	177	H
			5.470000	42.40	RMS	34.90	0.00	-30.60	46.70	-	-	-	-	153	177	H
			* 5.459163	41.83	RMS	34.90	0.00	-30.60	46.13	54	-7.87	-	-	153	177	H
			* 5.460000	50.63	Pk	34.90	0.00	-30.60	54.93	-	-	74	-19.07	219	177	V
			* 5.371003	53.11	Pk	35.00	0.00	-30.70	57.41	-	-	74	-16.59	219	177	V
			5.470000	50.82	Pk	34.90	0.00	-30.60	55.12	-	-	68.2	-13.08	219	177	V
			5.468139	53.17	Pk	34.90	0.00	-30.60	57.47	-	-	68.2	-10.73	219	177	V
			* 5.460000	39.81	RMS	34.90	0.00	-30.60	44.11	54	-9.89	-	-	219	177	V
			* 5.392480	40.92	RMS	35.00	0.00	-30.70	45.22	54	-8.78	-	-	219	177	V
			5.470000	40.16	RMS	34.90	0.00	-30.60	44.46	-	-	-	-	219	177	V
			* 5.392480	40.92	RMS	35.00	0.00	-30.70	45.22	54	-8.78	-	-	219	177	V
	5670	6	5.725000	63.00	Pk	34.80	0.00	-36.54	61.26	-	-	68.2	-6.94	38	182	H
			5.725435	64.57	Pk	34.80	0.00	-36.55	62.82	-	-	68.2	-5.38	38	182	H
			5.725000	57.25	Pk	34.80	0.00	-36.54	55.51	-	-	68.2	-12.69	354	175	V
			5.725548	59.13	Pk	34.80	0.00	-36.55	57.38	-	-	68.2	-10.82	354	175	V
		5	5.725000	57.89	Pk	34.60	0.00	-30.20	62.29	-	-	68.2	-5.91	325	224	H
			5.725761	58.95	Pk	34.50	0.00	-30.20	63.25	-	-	68.2	-4.95	325	224	H
			5.725000	52.64	Pk	34.60	0.00	-30.20	57.04	-	-	68.2	-11.16	59	192	V
			5.730734	54.90	Pk	34.60	0.00	-30.10	59.40	-	-	68.2	-8.80	59	192	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

80MHz

UNII-2C (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT80 SU Mode	5530	6	* 5.460000	57.37	Pk	34.50	0.00	-35.04	56.83	-	-	74	-17.17	295	389	H
			* 5.459021	60.81	Pk	34.50	0.00	-35.04	60.27	-	-	74	-13.73	295	389	H
			5.470000	58.83	Pk	34.50	0.00	-35.00	58.33	-	-	68.2	-9.87	295	389	H
			5.468243	63.68	Pk	34.50	0.00	-35.01	63.17	-	-	68.2	-5.03	295	389	H
			* 5.460000	45.16	RMS	34.50	0.00	-35.04	44.62	54	-9.38	-	-	295	389	H
			* 5.387800	46.47	RMS	34.50	0.00	-35.28	45.69	54	-8.31	-	-	295	389	H
			5.470000	45.39	RMS	34.50	0.00	-35.00	44.89	-	-	-	-	295	389	H
			* 5.387800	46.47	RMS	34.50	0.00	-35.28	45.69	54	-8.31	-	-	295	389	H
			* 5.460000	55.42	Pk	34.50	0.00	-35.04	54.88	-	-	74	-19.12	301	147	V
			* 5.362689	58.26	Pk	34.50	0.00	-35.34	57.42	-	-	74	-16.58	301	147	V
			5.470000	55.98	Pk	34.50	0.00	-35.00	55.48	-	-	68.2	-12.72	301	147	V
			5.467243	61.08	Pk	34.50	0.00	-35.01	60.57	-	-	68.2	-7.63	301	147	V
			* 5.460000	44.26	RMS	34.50	0.00	-35.04	43.72	54	-10.28	-	-	301	147	V
			* 5.350022	46.05	RMS	34.50	0.00	-35.37	45.18	54	-8.82	-	-	301	147	V
			5.470000	44.61	RMS	34.50	0.00	-35.00	44.11	-	-	-	-	301	147	V
			* 5.350022	46.05	RMS	34.50	0.00	-35.37	45.18	54	-8.82	-	-	301	147	V
		5	* 5.460000	56.95	Pk	34.60	0.00	-35.21	56.34	-	-	74	-17.66	343	169	H
			* 5.458999	62.63	Pk	34.60	0.00	-35.20	62.03	-	-	74	-11.97	343	169	H
			5.470000	57.71	Pk	34.60	0.00	-35.15	57.16	-	-	68.2	-11.04	343	169	H
			5.466754	63.48	Pk	34.60	0.00	-35.19	62.89	-	-	68.2	-5.31	343	169	H
			* 5.460000	45.54	RMS	34.60	0.00	-35.21	44.93	54	-9.07	-	-	343	169	H
			* 5.458643	46.62	RMS	34.60	0.00	-35.20	46.02	54	-7.98	-	-	343	169	H
			5.470000	46.48	RMS	34.60	0.00	-35.15	45.93	-	-	-	-	343	169	H
			* 5.458643	46.62	RMS	34.60	0.00	-35.20	46.02	54	-7.98	-	-	343	169	H
			* 5.460000	56.23	Pk	34.60	0.00	-35.21	55.62	-	-	74	-18.38	55	169	V
			* 5.440621	58.49	Pk	34.60	0.00	-35.19	57.90	-	-	74	-16.10	55	169	V
			5.470000	57.86	Pk	34.60	0.00	-35.15	57.31	-	-	68.2	-10.89	55	169	V
			5.469932	58.31	Pk	34.60	0.00	-35.15	57.76	-	-	68.2	-10.44	55	169	V
			* 5.460000	45.12	RMS	34.60	0.00	-35.21	44.51	54	-9.49	-	-	55	169	V
			* 5.458332	46.01	RMS	34.60	0.00	-35.20	45.41	54	-8.59	-	-	55	169	V
			5.470000	45.03	RMS	34.60	0.00	-35.15	44.48	-	-	-	-	55	169	V
			* 5.458332	46.01	RMS	34.60	0.00	-35.20	45.41	54	-8.59	-	-	55	169	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

160MHz

UNII-2C (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Ftr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT160 SU Mode	5570 (Lower)	6	* 5.460000	59.21	Pk	34.80	0.00	-34.90	59.11	-	-	74	-14.89	83	192	H
			* 5.459443	63.04	Pk	34.80	0.00	-34.90	62.94	-	-	74	-11.06	83	192	H
			5.470000	59.05	Pk	34.80	0.00	-34.80	59.05	-	-	68.2	-9.15	83	192	H
			5.464843	63.46	Pk	34.80	0.00	-34.90	63.36	-	-	68.2	-4.84	83	192	H
			* 5.460000	45.27	RMS	34.80	0.14	-34.90	45.31	54	-8.69	-	-	83	192	H
			* 5.450221	46.15	RMS	34.80	0.14	-34.90	46.19	54	-7.81	-	-	83	192	H
			5.470000	45.06	RMS	34.80	0.00	-34.80	45.06	-	-	-	-	83	192	H
			* 5.450221	46.15	RMS	34.80	0.14	-34.90	46.19	54	-7.81	-	-	83	192	H
			* 5.460000	56.25	Pk	34.80	0.00	-34.90	56.15	-	-	74	-17.85	100	122	V
			* 5.455932	59.23	Pk	34.80	0.00	-34.90	59.13	-	-	74	-14.87	100	122	V
			5.470000	56.14	Pk	34.80	0.00	-34.80	56.14	-	-	68.2	-12.06	100	122	V
			5.465932	60.58	Pk	34.80	0.00	-34.90	60.48	-	-	68.2	-7.72	100	122	V
			* 5.460000	44.74	RMS	34.80	0.14	-34.90	44.78	54	-9.22	-	-	100	122	V
			* 5.432577	45.79	RMS	34.80	0.14	-34.90	45.83	54	-8.17	-	-	100	122	V
			5.470000	44.63	RMS	34.80	0.00	-34.80	44.63	-	-	-	-	100	122	V
			* 5.432577	45.79	RMS	34.80	0.14	-34.90	45.83	54	-8.17	-	-	100	122	V
		5	* 5.460000	56.27	Pk	34.60	0.00	-32.31	58.56	-	-	74	-15.44	323	365	H
			* 5.434177	59.70	Pk	34.60	0.00	-32.33	61.97	-	-	74	-12.03	323	365	H
			5.470000	56.42	Pk	34.60	0.00	-32.27	58.75	-	-	68.2	-9.45	323	365	H
			5.469777	58.92	Pk	34.60	0.00	-32.27	61.25	-	-	68.2	-6.95	323	365	H
			* 5.460000	45.47	RMS	34.60	0.14	-32.31	47.90	54	-6.10	-	-	323	365	H
			* 5.437644	46.23	RMS	34.60	0.14	-32.34	48.63	54	-5.37	-	-	323	365	H
			5.470000	45.50	RMS	34.60	0.00	-32.27	47.83	-	-	-	-	323	365	H
			* 5.437644	46.23	RMS	34.60	0.14	-32.34	48.63	54	-5.37	-	-	323	365	H
			* 5.460000	56.79	Pk	34.60	0.00	-32.31	59.08	-	-	74	-14.92	5	260	V
			* 5.456977	60.91	Pk	34.60	0.00	-32.29	63.22	-	-	74	-10.78	5	260	V
			5.470000	57.76	Pk	34.60	0.00	-32.27	60.09	-	-	68.2	-8.11	5	260	V
			5.466310	60.96	Pk	34.60	0.00	-32.28	63.28	-	-	68.2	-4.92	5	260	V
			* 5.460000	46.10	RMS	34.60	0.14	-32.31	48.53	54	-5.47	-	-	5	260	V
			* 5.454643	47.48	RMS	34.60	0.14	-32.31	49.91	54	-4.09	-	-	5	260	V
			5.470000	46.35	RMS	34.60	0.00	-32.27	48.68	-	-	-	-	5	260	V
			* 5.454643	47.48	RMS	34.60	0.14	-32.31	49.91	54	-4.09	-	-	5	260	V
	5570 (Upper)	6	5.725000	62.78	Pk	34.80	0.00	-36.54	61.04	-	-	68.2	-7.16	107	372	H
			5.732801	64.74	Pk	34.80	0.00	-36.60	62.94	-	-	68.2	-5.26	107	372	H
			5.725000	55.91	Pk	34.80	0.00	-36.54	54.17	-	-	68.2	-14.03	264	387	V
			5.806382	58.84	Pk	34.90	0.00	-36.47	57.27	-	-	68.2	-10.93	264	387	V
		5	5.725000	63.40	Pk	34.80	0.00	-36.54	61.66	-	-	68.2	-6.54	168	236	H
			5.725945	65.37	Pk	34.80	0.00	-36.56	63.61	-	-	68.2	-4.59	168	236	H
			5.725000	58.17	Pk	34.80	0.00	-36.54	56.43	-	-	68.2	-11.77	176	310	V
			5.726823	60.78	Pk	34.80	0.00	-36.54	59.04	-	-	68.2	-9.16	176	310	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.58. 802.11be SISO PARTIAL RU MODE IN UNII-2C BAND - BANDEDGE

20MHz

UNII-2C (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filtr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 52+26T - RU70	5500	6	* 5.460000	55.87	Pk	34.50	0.00	-35.04	55.33	-	-	74	-18.67	285	202	H
			* 5.459377	58.40	Pk	34.50	0.00	-35.04	57.86	-	-	74	-16.14	285	202	H
			5.470000	56.86	Pk	34.50	0.00	-35.00	56.36	-	-	68.2	-11.84	285	202	H
			5.467643	63.70	Pk	34.50	0.00	-35.01	63.19	-	-	68.2	-5.01	285	202	H
			* 5.460000	44.49	RMS	34.50	0.00	-35.04	43.95	54	-10.05	-	-	285	202	H
			* 5.353333	46.43	RMS	34.50	0.00	-35.36	45.57	54	-8.43	-	-	285	202	H
			5.470000	44.87	RMS	34.50	0.00	-35.00	44.37	-	-	-	-	285	202	H
			* 5.353333	46.43	RMS	34.50	0.00	-35.36	45.57	54	-8.43	-	-	285	202	H
			* 5.460000	55.40	Pk	34.50	0.00	-35.04	54.86	-	-	74	-19.14	307	143	V
			* 5.356267	57.83	Pk	34.50	0.00	-35.36	56.97	-	-	74	-17.03	307	143	V
			5.470000	55.07	Pk	34.50	0.00	-35.00	54.57	-	-	68.2	-13.63	307	143	V
			5.468154	57.80	Pk	34.50	0.00	-35.01	57.29	-	-	68.2	-10.91	307	143	V
			* 5.460000	44.15	RMS	34.50	0.00	-35.04	43.61	54	-10.39	-	-	307	143	V
			* 5.363755	46.26	RMS	34.50	0.00	-35.34	45.42	54	-8.58	-	-	307	143	V
			5.470000	44.32	RMS	34.50	0.00	-35.00	43.82	-	-	-	-	307	143	V
			* 5.363755	46.26	RMS	34.50	0.00	-35.34	45.42	54	-8.58	-	-	307	143	V
		5	* 5.460000	55.43	Pk	34.50	0.00	-35.04	54.89	-	-	74	-19.11	271	138	H
			* 5.371889	58.25	Pk	34.50	0.00	-35.32	57.43	-	-	74	-16.57	271	138	H
			5.470000	56.00	Pk	34.50	0.00	-35.00	55.50	-	-	68.2	-12.70	271	138	H
			5.468177	59.76	Pk	34.50	0.00	-35.01	59.25	-	-	68.2	-8.95	271	138	H
			* 5.460000	44.88	RMS	34.50	0.00	-35.04	44.34	54	-9.66	-	-	271	138	H
			* 5.351822	46.62	RMS	34.50	0.00	-35.37	45.75	54	-8.25	-	-	271	138	H
			5.470000	45.12	RMS	34.50	0.00	-35.00	44.62	-	-	-	-	271	138	H
			* 5.351822	46.62	RMS	34.50	0.00	-35.37	45.75	54	-8.25	-	-	271	138	H
			* 5.460000	55.16	Pk	34.50	0.00	-35.04	54.62	-	-	74	-19.38	4	221	V
			* 5.357911	58.34	Pk	34.50	0.00	-35.35	57.49	-	-	74	-16.51	4	221	V
			5.470000	55.27	Pk	34.50	0.00	-35.00	54.77	-	-	68.2	-13.43	4	221	V
			5.465799	57.49	Pk	34.50	0.00	-35.02	56.97	-	-	68.2	-11.23	4	221	V
			* 5.460000	44.24	RMS	34.50	0.00	-35.04	43.70	54	-10.30	-	-	4	221	V
			* 5.354244	46.43	RMS	34.50	0.00	-35.36	45.57	54	-8.43	-	-	4	221	V
			5.470000	44.44	RMS	34.50	0.00	-35.00	43.94	-	-	-	-	4	221	V
			* 5.354244	46.43	RMS	34.50	0.00	-35.36	45.57	54	-8.43	-	-	4	221	V
EHT20 52+26T - RU72	5700	6	5.725000	62.95	Pk	34.80	0.00	-36.54	61.21	-	-	68.2	-6.99	27	190	H
			5.725095	63.02	Pk	34.80	0.00	-36.54	61.28	-	-	68.2	-6.92	27	190	H
			5.725000	59.95	Pk	34.80	0.00	-36.54	58.21	-	-	68.2	-9.99	4	173	V
		5	5.725378	60.80	Pk	34.80	0.00	-36.55	59.05	-	-	68.2	-9.15	4	173	V
			5.725000	59.49	Pk	34.80	0.00	-36.54	57.75	-	-	68.2	-10.45	41	141	H
			5.725067	60.33	Pk	34.80	0.00	-36.54	58.59	-	-	68.2	-9.61	41	141	H
			5.725000	62.15	Pk	34.80	0.00	-36.54	60.41	-	-	68.2	-7.79	13	126	V
			5.725038	64.79	Pk	34.80	0.00	-36.54	63.05	-	-	68.2	-5.15	13	126	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

80MHz

UNII-2C (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Ftr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT80 484+242T - RU93	5530	6	* 5.460000	56.55	Pk	34.50	0.00	-35.04	56.01	-	-	74	-17.99	288	104	H
			* 5.457754	62.23	Pk	34.50	0.00	-35.05	61.68	-	-	74	-12.32	288	104	H
			5.470000	59.92	Pk	34.50	0.00	-35.00	59.42	-	-	68.2	-8.78	288	104	H
			5.467066	63.70	Pk	34.50	0.00	-35.01	63.19	-	-	68.2	-5.01	288	104	H
			* 5.460000	44.66	RMS	34.50	0.00	-35.04	44.12	54	-9.88	-	-	288	104	H
			* 5.380289	46.07	RMS	34.50	0.00	-35.30	45.27	54	-8.73	-	-	288	104	H
			5.470000	45.39	RMS	34.50	0.00	-35.00	44.89	-	-	-	-	288	104	H
			* 5.380289	46.07	RMS	34.50	0.00	-35.30	45.27	54	-8.73	-	-	288	104	H
			* 5.460000	56.85	Pk	34.50	0.00	-35.04	56.31	-	-	74	-17.69	289	158	V
			* 5.458132	58.46	Pk	34.50	0.00	-35.05	57.91	-	-	74	-16.09	289	158	V
			5.470000	56.44	Pk	34.50	0.00	-35.00	55.94	-	-	68.2	-12.26	289	158	V
			5.469177	59.25	Pk	34.50	0.00	-35.01	58.74	-	-	68.2	-9.46	289	158	V
			* 5.460000	44.31	RMS	34.50	0.00	-35.04	43.77	54	-10.23	-	-	289	158	V
			* 5.375133	45.97	RMS	34.50	0.00	-35.31	45.16	54	-8.84	-	-	289	158	V
			5.470000	44.72	RMS	34.50	0.00	-35.00	44.22	-	-	-	-	289	158	V
		5	* 5.375133	45.97	RMS	34.50	0.00	-35.31	45.16	54	-8.84	-	-	289	158	V
			* 5.456666	65.15	Pk	34.50	0.00	-38.89	60.76	-	-	74	-13.24	283	126	H
			* 5.459243	50.51	RMS	34.50	0.00	-38.85	46.16	54	-7.84	-	-	283	126	H
			* 5.459243	50.51	RMS	34.50	0.00	-38.85	46.16	54	-7.84	-	-	283	126	H
			* 5.460000	63.72	Pk	34.50	0.00	-38.85	59.37	-	-	74	-14.63	283	126	H
			* 5.460000	49.74	RMS	34.50	0.00	-38.85	45.39	54	-8.61	-	-	283	126	H
			5.467110	67.21	Pk	34.50	0.00	-38.80	62.91	-	-	68.2	-5.29	283	126	H
			5.470000	66.24	Pk	34.50	0.00	-38.83	61.91	-	-	68.2	-6.29	283	126	H
			5.470000	51.11	RMS	34.50	0.00	-38.83	46.78	-	-	-	-	283	126	H
			* 5.356733	48.78	RMS	34.50	0.00	-39.14	44.14	54	-9.86	-	-	334	278	V
			* 5.356733	48.78	RMS	34.50	0.00	-39.14	44.14	54	-9.86	-	-	334	278	V
			* 5.386133	61.29	Pk	34.40	0.00	-39.06	56.63	-	-	74	-17.37	334	278	V
			* 5.460000	57.88	Pk	34.50	0.00	-38.85	53.53	-	-	74	-20.47	334	278	V
			* 5.460000	47.70	RMS	34.50	0.00	-38.85	43.35	54	-10.65	-	-	334	278	V
			5.460888	60.39	Pk	34.50	0.00	-38.83	56.06	-	-	68.2	-12.14	334	278	V
			5.470000	57.78	Pk	34.50	0.00	-38.83	53.45	-	-	68.2	-14.75	334	278	V
			5.470000	47.25	RMS	34.50	0.00	-38.83	42.92	-	-	-	-	334	278	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

160MHz

UNII-2C (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT160 996+484+ 242T - S99	5570 (Lower)	6	* 5.460000	65.52	Pk	34.70	0.00	-38.00	62.22	-	-	74	-11.78	31	187	H
			* 5.457066	68.56	Pk	34.70	0.00	-38.02	65.24	-	-	74	-8.76	31	187	H
			5.470000	64.04	Pk	34.70	0.00	-37.98	60.76	-	-	68.2	-7.44	31	187	H
			5.460177	66.73	Pk	34.70	0.00	-38.00	63.43	-	-	68.2	-4.77	31	187	H
			* 5.460000	46.83	RMS	34.70	0.00	-38.00	43.53	54	-10.47	-	-	31	187	H
			* 5.458821	49.42	RMS	34.70	0.00	-38.03	46.09	54	-7.91	-	-	31	187	H
			5.470000	47.26	RMS	34.70	0.00	-37.98	43.98	-	-	-	-	31	187	H
			* 5.458821	49.42	RMS	34.70	0.00	-38.03	46.09	54	-7.91	-	-	31	187	H
			* 5.460000	65.86	Pk	34.70	0.00	-38.00	62.56	-	-	74	-11.44	306	164	V
			* 5.457554	67.28	Pk	34.70	0.00	-38.01	63.97	-	-	74	-10.03	306	164	V
			5.470000	61.64	Pk	34.70	0.00	-37.98	58.36	-	-	68.2	-9.84	306	164	V
			5.469977	66.64	Pk	34.70	0.00	-37.98	63.36	-	-	68.2	-4.84	306	164	V
			* 5.460000	47.58	RMS	34.70	0.00	-38.00	44.28	54	-9.72	-	-	306	164	V
			* 5.418088	48.39	RMS	34.80	0.00	-38.10	45.09	54	-8.91	-	-	306	164	V
			5.470000	47.00	RMS	34.70	0.00	-37.98	43.72	-	-	-	-	306	164	V
		5	* 5.418088	48.39	RMS	34.80	0.00	-38.10	45.09	54	-8.91	-	-	306	164	V
			* 5.460000	61.00	Pk	34.60	0.00	-35.21	60.39	-	-	74	-13.61	347	125	H
			* 5.455977	65.42	Pk	34.60	0.00	-35.19	64.83	-	-	74	-9.17	347	125	H
			5.470000	61.47	Pk	34.60	0.00	-35.15	60.92	-	-	68.2	-7.28	347	125	H
			5.467777	63.41	Pk	34.60	0.00	-35.17	62.84	-	-	68.2	-5.36	347	125	H
			* 5.460000	47.14	RMS	34.60	0.00	-35.21	46.53	54	-7.47	-	-	347	125	H
			* 5.456999	48.45	RMS	34.60	0.00	-35.19	47.86	54	-6.14	-	-	347	125	H
			5.470000	47.39	RMS	34.60	0.00	-35.15	46.84	-	-	-	-	347	125	H
			* 5.456999	48.45	RMS	34.60	0.00	-35.19	47.86	54	-6.14	-	-	347	125	H
			* 5.460000	57.98	Pk	34.60	0.00	-35.21	57.37	-	-	74	-16.63	62	256	V
			* 5.458888	60.35	Pk	34.60	0.00	-35.20	59.75	-	-	74	-14.25	62	256	V
			5.470000	57.54	Pk	34.60	0.00	-35.15	56.99	-	-	68.2	-11.21	62	256	V
			5.461621	59.52	Pk	34.60	0.00	-35.22	58.90	-	-	68.2	-9.30	62	256	V
			* 5.460000	45.53	RMS	34.60	0.00	-35.21	44.92	54	-9.08	-	-	62	256	V
			* 5.446399	46.72	RMS	34.60	0.00	-35.22	46.10	54	-7.90	-	-	62	256	V
			5.470000	46.19	RMS	34.60	0.00	-35.15	45.64	-	-	-	-	62	256	V
			* 5.446399	46.72	RMS	34.60	0.00	-35.22	46.10	54	-7.90	-	-	62	256	V
EHT160 996+484+ 242T - RU96	5570 (Upper)	6	5.725000	60.21	Pk	34.80	0.00	-36.54	58.47	-	-	68.2	-9.73	139	389	H
			5.736513	64.55	Pk	34.80	0.00	-36.57	62.78	-	-	68.2	-5.42	139	389	H
			5.725000	56.18	Pk	34.80	0.00	-36.54	54.44	-	-	68.2	-13.76	353	333	V
		5	5.802246	59.23	Pk	34.90	0.00	-36.47	57.66	-	-	68.2	-10.54	353	333	V
			5.725000	61.43	Pk	34.80	0.00	-36.54	59.69	-	-	68.2	-8.51	317	137	H
			5.776774	64.56	Pk	34.80	0.00	-36.50	62.86	-	-	68.2	-5.34	317	137	H
			5.725000	59.11	Pk	34.80	0.00	-36.54	57.37	-	-	68.2	-10.83	358	167	V
			5.777256	61.54	Pk	34.80	0.00	-36.51	59.83	-	-	68.2	-8.37	358	167	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.59. 802.11be MIMO SU MODE IN UNII-2C BAND – BANDEDGE**20MHz**

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity	
EHT20 SU Mode	5500	6+5	* 5.460000	56.57	Pk	34.50	0.00	-35.04	56.03	-	-	74	-17.97	105	331	H	
			* 5.404022	59.02	Pk	34.50	0.00	-35.24	58.28	-	-	74	-15.72	105	331	H	
			5.470000	61.68	Pk	34.50	0.00	-35.00	61.18	-	-	-	68.2	-7.02	105	331	H
			5.469932	63.89	Pk	34.50	0.00	-35.00	63.39	-	-	-	68.2	-4.81	105	331	H
			* 5.460000	44.72	RMS	34.50	0.00	-35.04	44.18	54	-9.82	-	-	105	331	H	
			* 5.373089	46.50	RMS	34.50	0.00	-35.31	45.69	54	-8.31	-	-	105	331	H	
			5.470000	45.45	RMS	34.50	0.00	-35.00	44.95	-	-	-	-	105	331	H	
			* 5.373089	46.50	RMS	34.50	0.00	-35.31	45.69	54	-8.31	-	-	105	331	H	
			* 5.460000	54.27	Pk	34.50	0.00	-35.04	53.73	-	-	74	-20.27	112	129	V	
			* 5.417822	57.84	Pk	34.50	0.00	-35.20	57.14	-	-	74	-16.86	112	129	V	
	5.470000		56.19	Pk	34.50	0.00	-35.00	55.69	-	-	68.2	-12.51	112	129	V		
	5.468177		58.55	Pk	34.50	0.00	-35.01	58.04	-	-	68.2	-10.16	112	129	V		
	* 5.460000		44.16	RMS	34.50	0.00	-35.04	43.62	54	-10.38	-	-	112	129	V		
	* 5.379844		45.94	RMS	34.50	0.00	-35.30	45.14	54	-8.86	-	-	112	129	V		
	5.470000		44.60	RMS	34.50	0.00	-35.00	44.10	-	-	-	-	112	129	V		
	* 5.379844		45.94	RMS	34.50	0.00	-35.30	45.14	54	-8.86	-	-	112	129	V		
	5700		5.725000	61.37	Pk	34.50	0.00	-34.41	61.46	-	-	68.2	-6.74	341	389	H	
			5.725548	62.79	Pk	34.50	0.00	-34.41	62.88	-	-	68.2	-5.32	341	389	H	
			5.725000	59.40	Pk	34.50	0.00	-34.41	59.49	-	-	68.2	-8.71	10	216	V	
			5.725322	62.28	Pk	34.50	0.00	-34.41	62.37	-	-	68.2	-5.83	10	216	V	

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

40MHz

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT40 SU Mode	5510	6+5	* 5.460000	57.09	Pk	34.60	0.00	-37.20	54.49	-	-	74	-19.51	345	219	H
			* 5.456443	60.91	Pk	34.60	0.00	-37.40	58.11	-	-	74	-15.89	345	219	H
			* 5.460000	47.07	RMS	34.60	0.00	-37.20	44.47	54	-9.53	-	-	345	219	H
			* 5.457866	47.51	RMS	34.60	0.00	-37.31	44.80	54	-9.20	-	-	345	219	H
			* 5.457866	47.51	RMS	34.60	0.00	-37.31	44.80	54	-9.20	-	-	345	219	H
			5.469532	65.55	Pk	34.70	0.00	-37.40	62.85	-	-	68.2	-5.35	345	219	H
			5.470000	62.79	Pk	34.70	0.00	-37.40	60.09	-	-	68.2	-8.11	345	219	H
			5.470000	47.46	RMS	34.70	0.00	-37.40	44.76	-	-	-	-	345	219	H
			* 5.460000	57.20	Pk	34.60	0.00	-37.20	54.60	-	-	74	-19.40	23	105	V
			* 5.458910	59.73	Pk	34.60	0.00	-37.30	57.03	-	-	74	-16.97	23	105	V
	* 5.460000		45.82	RMS	34.60	0.00	-37.20	43.22	54	-10.78	-	-	23	105	V	
	* 5.449066		47.15	RMS	34.60	0.00	-37.31	44.44	54	-9.56	-	-	23	105	V	
	* 5.449066		47.15	RMS	34.60	0.00	-37.31	44.44	54	-9.56	-	-	23	105	V	
	5.465932		61.04	Pk	34.70	0.00	-37.31	58.43	-	-	68.2	-9.77	23	105	V	
	5.470000		56.76	Pk	34.70	0.00	-37.40	54.06	-	-	68.2	-14.14	23	105	V	
	5.470000		46.39	RMS	34.70	0.00	-37.40	43.69	-	-	-	-	23	105	V	
	5670		5.725000	61.11	Pk	34.80	0.00	-36.80	59.11	-	-	68.2	-9.09	5	120	H
			5.727135	65.38	Pk	34.80	0.00	-36.90	63.28	-	-	68.2	-4.92	5	120	H
			5.725000	59.16	Pk	34.80	0.00	-36.80	57.16	-	-	68.2	-11.04	26	160	V
			5.725435	61.62	Pk	34.80	0.00	-36.80	59.62	-	-	68.2	-8.58	26	160	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

80MHz

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT80 SU Mode	5530	6+5	* 5.460000	53.02	Pk	34.90	0.00	-30.60	57.32	-	-	74	-16.68	342	216	H
			* 5.455838	57.01	Pk	34.90	0.00	-30.60	61.31	-	-	74	-12.69	342	216	H
			5.470000	53.57	Pk	34.90	0.00	-30.60	57.87	-	-	68.2	-10.33	342	216	H
			5.466439	58.75	Pk	34.90	0.00	-30.60	63.05	-	-	68.2	-5.15	342	216	H
			* 5.460000	41.44	RMS	34.90	0.00	-30.60	45.74	54	-8.26	-	-	342	216	H
			* 5.450312	41.78	RMS	34.90	0.00	-30.60	46.08	54	-7.92	-	-	342	216	H
			5.470000	41.51	RMS	34.90	0.00	-30.60	45.81	-	-	-	-	342	216	H
			* 5.450312	41.78	RMS	34.90	0.00	-30.60	46.08	54	-7.92	-	-	342	216	H
			* 5.460000	50.71	Pk	34.90	0.00	-30.60	55.01	-	-	74	-18.99	44	249	V
			* 5.354100	53.20	Pk	35.00	0.00	-30.70	57.50	-	-	74	-16.50	44	249	V
			5.470000	50.20	Pk	34.90	0.00	-30.60	54.50	-	-	68.2	-13.70	44	249	V
			5.460963	53.19	Pk	34.90	0.00	-30.60	57.49	-	-	68.2	-10.71	44	249	V
			* 5.460000	39.69	RMS	34.90	0.00	-30.60	43.99	54	-10.01	-	-	44	249	V
			* 5.374578	40.96	RMS	35.00	0.00	-30.70	45.26	54	-8.74	-	-	44	249	V
			5.470000	39.84	RMS	34.90	0.00	-30.60	44.14	-	-	-	-	44	249	V
			* 5.374578	40.96	RMS	35.00	0.00	-30.70	45.26	54	-8.74	-	-	44	249	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

160MHz

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/PaD (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT160 SU Mode	5570 (Lower)	6+5	* 5.460000	61.03	Pk	34.70	0.00	-37.06	58.67	-	-	74	-15.33	209	156	H
			* 5.454510	65.67	Pk	34.70	0.00	-36.97	63.40	-	-	74	-10.60	209	156	H
			5.470000	60.34	Pk	34.70	0.00	-37.00	58.04	-	-	68.2	-10.16	209	156	H
			5.469710	65.22	Pk	34.70	0.00	-36.99	62.93	-	-	68.2	-5.27	209	156	H
			* 5.460000	47.94	RMS	34.70	0.14	-37.06	45.72	54	-8.28	-	-	209	156	H
			* 5.458443	48.48	RMS	34.70	0.14	-37.05	46.27	54	-7.73	-	-	209	156	H
			5.470000	47.28	RMS	34.70	0.14	-37.00	45.12	-	-	-	-	209	156	H
			* 5.458443	48.48	RMS	34.70	0.14	-37.05	46.27	54	-7.73	-	-	209	156	H
			* 5.460000	61.03	Pk	34.70	0.00	-37.06	58.67	-	-	74	-15.33	209	156	H
			* 5.454510	65.67	Pk	34.70	0.00	-36.97	63.40	-	-	74	-10.60	209	156	H
			5.470000	60.34	Pk	34.70	0.00	-37.00	58.04	-	-	68.2	-10.16	209	156	H
			5.469710	65.22	Pk	34.70	0.00	-36.99	62.93	-	-	68.2	-5.27	209	156	H
			* 5.460000	47.94	RMS	34.70	0.14	-37.06	45.72	54	-8.28	-	-	209	156	H
			* 5.458443	48.48	RMS	34.70	0.14	-37.05	46.27	54	-7.73	-	-	209	156	H
			5.470000	47.28	RMS	34.70	0.14	-37.00	45.12	-	-	-	-	209	156	H
			* 5.458443	48.48	RMS	34.70	0.14	-37.05	46.27	54	-7.73	-	-	209	156	H
	5570 (Upper)		5.725000	59.68	Pk	34.50	0.00	-34.41	59.77	-	-	68.2	-8.43	320	327	H
			5.734105	63.00	Pk	34.60	0.00	-34.40	63.20	-	-	68.2	-5.00	320	327	H
			5.725000	60.15	Pk	34.50	0.00	-34.41	60.24	-	-	68.2	-7.96	10	202	V
			5.729543	61.78	Pk	34.50	0.00	-34.40	61.88	-	-	68.2	-6.32	10	202	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.60. 802.11be MIMO PARTIAL RU MODE IN UNII-2C BAND - BANDEDGE

20MHz

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filt/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 52+26T - RU70	5500	6+5	* 5.460000	56.24	Pk	34.50	0.00	-35.04	55.70	-	-	74	-18.30	322	190	H
			* 5.370111	58.73	Pk	34.50	0.00	-35.32	57.91	-	-	74	-16.09	322	190	H
			5.470000	58.20	Pk	34.50	0.00	-35.00	57.70	-	-	68.2	-10.50	322	190	H
			5.469243	60.22	Pk	34.50	0.00	-35.01	59.71	-	-	68.2	-8.49	322	190	H
			* 5.460000	45.18	RMS	34.50	0.00	-35.04	44.64	54	-9.36	-	-	322	190	H
			* 5.385622	46.62	RMS	34.50	0.00	-35.28	45.84	54	-8.16	-	-	322	190	H
			5.470000	45.39	RMS	34.50	0.00	-35.00	44.89	-	-	-	-	322	190	H
			* 5.385622	46.62	RMS	34.50	0.00	-35.28	45.84	54	-8.16	-	-	322	190	H
			* 5.460000	54.78	Pk	34.50	0.00	-35.04	54.24	-	-	74	-19.76	343	160	V
			* 5.364489	58.26	Pk	34.50	0.00	-35.34	57.42	-	-	74	-16.58	343	160	V
			5.470000	55.95	Pk	34.50	0.00	-35.00	55.45	-	-	68.2	-12.75	343	160	V
			5.468443	57.34	Pk	34.50	0.00	-35.01	56.83	-	-	68.2	-11.37	343	160	V
			* 5.460000	44.64	RMS	34.50	0.00	-35.04	44.10	54	-9.90	-	-	343	160	V
			* 5.376311	46.38	RMS	34.50	0.00	-35.31	45.57	54	-8.43	-	-	343	160	V
			5.470000	44.18	RMS	34.50	0.00	-35.00	43.68	-	-	-	-	343	160	V
			* 5.376311	46.38	RMS	34.50	0.00	-35.31	45.57	54	-8.43	-	-	343	160	V
EHT20 52+26T - RU72	5700	6+5	5.725000	66.36	Pk	34.60	0.00	-38.00	62.96	-	-	68.2	-5.24	278	114	H
			5.725128	66.97	Pk	34.60	0.00	-38.00	63.57	-	-	68.2	-4.63	278	114	H
			5.725000	59.79	Pk	34.60	0.00	-38.00	56.39	-	-	68.2	-11.81	311	184	V
			5.725489	61.66	Pk	34.60	0.00	-38.01	58.25	-	-	68.2	-9.95	311	184	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

80MHz

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filt/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT80 484+242T - RU93	5530	6+5	* 5.460000	59.05	Pk	34.70	0.00	-37.06	56.69	-	-	74	-17.31	35	196	H
			* 5.458843	62.25	Pk	34.70	0.00	-37.04	59.91	-	-	74	-14.09	35	196	H
			5.470000	57.92	Pk	34.70	0.00	-37.00	55.62	-	-	68.2	-12.58	35	196	H
			5.463866	65.18	Pk	34.70	0.00	-37.01	62.87	-	-	68.2	-5.33	35	196	H
			* 5.460000	46.63	RMS	34.70	0.00	-37.06	44.27	54	-9.73	-	-	35	196	H
			* 5.376689	47.82	RMS	34.80	0.00	-37.18	45.44	54	-8.56	-	-	35	196	H
			5.470000	46.71	RMS	34.70	0.00	-37.00	44.41	-	-	-	-	35	196	H
			* 5.376689	47.82	RMS	34.80	0.00	-37.18	45.44	54	-8.56	-	-	35	196	H
			* 5.460000	57.92	Pk	34.70	0.00	-37.06	55.56	-	-	74	-18.44	310	144	V
			* 5.459066	60.94	Pk	34.70	0.00	-37.04	58.60	-	-	74	-15.40	310	144	V
			5.470000	58.86	Pk	34.70	0.00	-37.00	56.56	-	-	68.2	-11.64	310	144	V
			5.468354	63.18	Pk	34.70	0.00	-36.99	60.89	-	-	68.2	-7.31	310	144	V
			* 5.460000	46.94	RMS	34.70	0.00	-37.06	44.58	54	-9.42	-	-	310	144	V
			* 5.458266	47.60	RMS	34.70	0.00	-37.05	45.25	54	-8.75	-	-	310	144	V
			5.470000	46.73	RMS	34.70	0.00	-37.00	44.43	-	-	-	-	310	144	V
			* 5.458266	47.60	RMS	34.70	0.00	-37.05	45.25	54	-8.75	-	-	310	144	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

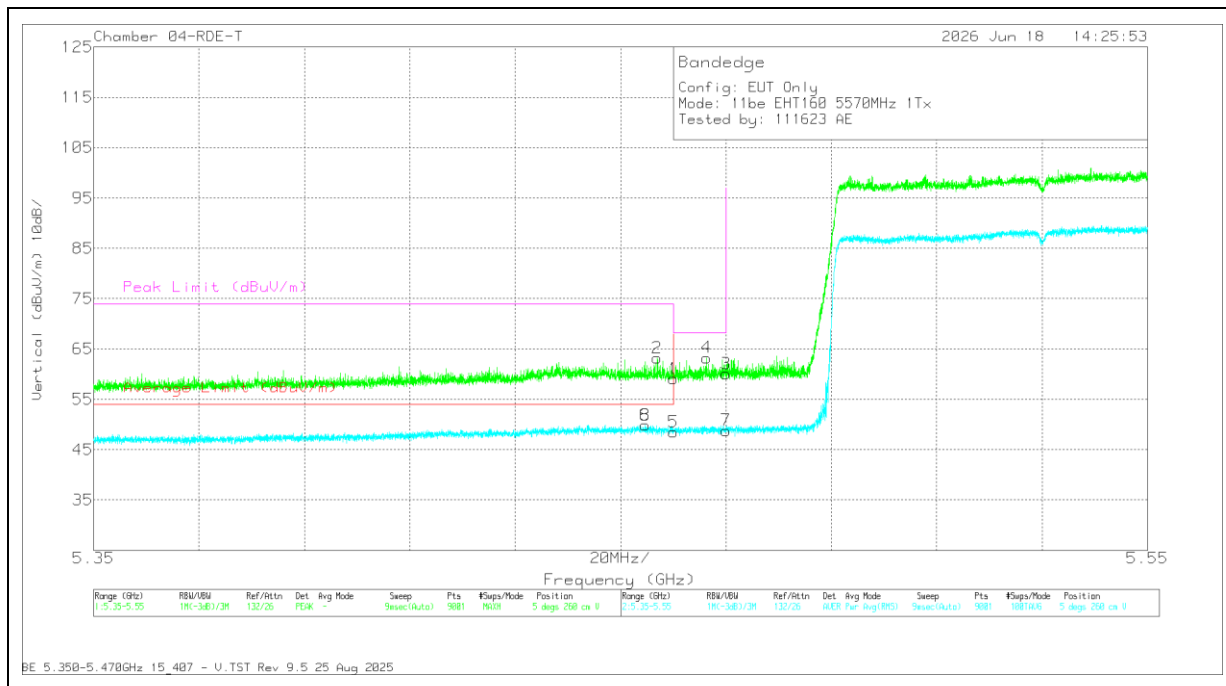
160MHz

UNI-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filtr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT160 996+484+ 242T - S99	5570 (Lower)	6+5	* 5.460000	60.22	Pk	34.50	0.00	-35.04	59.68	-	-	74	-14.32	283	139	H
			* 5.450799	63.50	Pk	34.40	0.00	-35.08	62.82	-	-	74	-11.18	283	139	H
			5.470000	60.66	Pk	34.50	0.00	-35.00	60.16	-	-	68.2	-8.04	283	139	H
			5.465621	63.90	Pk	34.50	0.00	-35.02	63.38	-	-	68.2	-4.82	283	139	H
			* 5.460000	46.03	RMS	34.50	0.00	-35.04	45.49	54	-8.51	-	-	283	139	H
			* 5.450821	47.20	RMS	34.40	0.00	-35.08	46.52	54	-7.48	-	-	283	139	H
			5.470000	45.56	RMS	34.50	0.00	-35.00	45.06	-	-	-	-	283	139	H
			* 5.450821	47.20	RMS	34.40	0.00	-35.08	46.52	54	-7.48	-	-	283	139	H
			* 5.460000	56.13	Pk	34.50	0.00	-35.04	55.59	-	-	74	-18.41	331	110	V
			* 5.457443	58.42	Pk	34.50	0.00	-35.05	57.87	-	-	74	-16.13	331	110	V
			5.470000	55.78	Pk	34.50	0.00	-35.00	55.28	-	-	68.2	-12.92	331	110	V
			5.469488	57.85	Pk	34.50	0.00	-35.00	57.35	-	-	68.2	-10.85	331	110	V
			* 5.460000	44.80	RMS	34.50	0.00	-35.04	44.26	54	-9.74	-	-	331	110	V
			* 5.352378	46.05	RMS	34.50	0.00	-35.37	45.18	54	-8.82	-	-	331	110	V
EHT160 996+484+ 242T - RU96	5570 (Upper)	6+5	5.725000	57.63	Pk	34.80	0.00	-36.54	55.89	-	-	68.2	-12.31	46	146	H
			5.726341	65.25	Pk	34.80	0.00	-36.55	63.50	-	-	68.2	-4.70	46	146	H
			5.725000	57.66	Pk	34.80	0.00	-36.54	55.92	-	-	68.2	-12.28	333	143	V
			5.737675	64.69	Pk	34.80	0.00	-36.56	62.93	-	-	68.2	-5.27	333	143	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

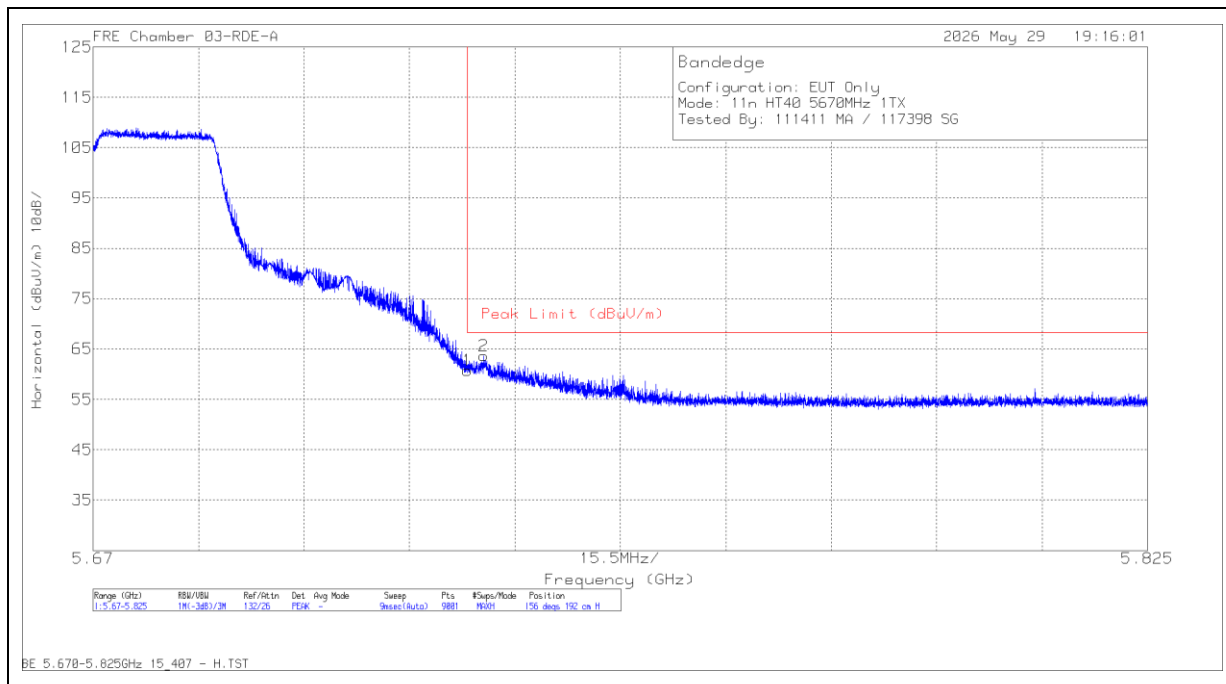
WORST-CASE BANDEDGE (LOW CHANNEL)**802.11be EHT160 / 5570 MHz / SISO / SU****VERTICAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fltr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.460000	56.79	Pk	34.60	0.00	-32.31	59.08	-	-	74	-14.92	5	260	V
2	* 5.456977	60.91	Pk	34.60	0.00	-32.29	63.22	-	-	74	-10.78	5	260	V
3	5.470000	57.76	Pk	34.60	0.00	-32.27	60.09	-	-	68.2	-8.11	5	260	V
4	5.466310	60.96	Pk	34.60	0.00	-32.28	63.28	-	-	68.2	-4.92	5	260	V
5	* 5.460000	46.10	RMS	34.60	0.14	-32.31	48.53	54	-5.47	-	-	5	260	V
6	* 5.454643	47.48	RMS	34.60	0.14	-32.31	49.91	54	-4.09	-	-	5	260	V
7	5.470000	46.35	RMS	34.60	0.00	-32.27	48.68	-	-	-	-	5	260	V
8	* 5.454643	47.48	RMS	34.60	0.14	-32.31	49.91	54	-4.09	-	-	5	260	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

WORST-CASE BANDEDGE (HIGH CHANNEL)**802.11n HT40 / 5670 MHz / SISO****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/Filtr/Pad (dB)	Correct Reading (dBuV/m)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725000	63.94	Pk	34.40	0.00	-37.60	60.74	68.2	-7.46	156	192	H
2	5.727384	66.88	Pk	34.40	0.00	-37.60	63.68	68.2	-4.52	156	192	H

Pk - Peak detector

RMS - RMS detection

1.1.61. 802.11n/ac MIMO MODE IN UNII-2C BAND – SPURIOUS EMISSIONS

20MHz

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
HT20	5500	6+5	* 3.923347	56.19	PK-U	33.40	0.00	-45.40	44.19	-	-	74	-29.81	114	384	H
			* 3.917433	44.09	ADR	33.40	0.00	-45.40	32.09	54	-21.91	-	-	114	384	H
			* 3.925474	56.07	PK-U	33.40	0.00	-45.40	44.07	-	-	74	-29.93	114	101	V
			* 3.916587	44.27	ADR	33.40	0.00	-45.40	32.27	54	-21.73	-	-	114	101	V
			2.399628	58.25	PK-U	32.10	0.00	-46.80	43.55	-	-	68.2	-24.65	114	200	V
			2.399997	59.02	PK-U	32.10	0.00	-46.80	44.32	-	-	68.2	-23.88	238	271	H
			9.947131	54.41	PK-U	37.50	0.00	-42.11	49.80	-	-	68.2	-18.4	114	101	V
			9.959726	53.79	PK-U	37.60	0.00	-42.57	48.82	-	-	68.2	-19.38	114	199	H
			* 3.820067	54.99	PK-U	33.40	0.00	-45.10	43.29	-	-	74	-30.71	360	101	H
			* 3.84554	43.40	ADR	33.40	0.00	-45.25	31.55	54	-22.45	-	-	360	101	H
	5580		* 3.797673	55.34	PK-U	33.40	0.00	-45.20	43.54	-	-	74	-30.46	360	101	V
			* 3.795739	43.44	ADR	33.40	0.00	-45.10	31.74	54	-22.26	-	-	360	101	V
			* 11.529059	54.16	PK-U	38.30	0.00	-41.81	50.65	-	-	74	-23.35	360	101	H
			* 11.527739	42.41	ADR	38.30	0.00	-41.93	38.78	54	-15.22	-	-	360	101	H
			* 11.477646	54.66	PK-U	38.20	0.00	-41.80	51.06	-	-	74	-22.94	360	101	V
			* 11.455032	42.77	ADR	38.20	0.00	-42.40	38.57	54	-15.43	-	-	360	101	V
			2.133958	58.20	PK-U	31.70	0.00	-46.50	43.40	-	-	68.2	-24.8	360	200	V
			2.149685	58.44	PK-U	31.60	0.00	-46.43	43.61	-	-	68.2	-24.59	360	101	H
			1.743212	58.13	PK-U	29.70	0.00	-46.42	41.41	-	-	68.2	-26.79	360	200	V
			1.747717	58.28	PK-U	29.70	0.00	-46.40	41.58	-	-	68.2	-26.62	360	200	H
	5720		3.075158	57.02	PK-U	33.10	0.00	-46.20	43.92	-	-	68.2	-24.28	360	200	V
			3.085842	57.51	PK-U	33.20	0.00	-46.20	44.51	-	-	68.2	-23.69	360	101	H
			10.155744	54.59	PK-U	37.80	0.00	-41.97	50.42	-	-	68.2	-17.78	360	101	V
			10.173279	54.99	PK-U	37.80	0.00	-41.20	51.59	-	-	68.2	-16.61	360	101	H
			1.853502	59.21	PK-U	30.60	0.00	-46.15	43.66	-	-	68.2	-24.54	360	200	V
			1.864106	58.53	PK-U	30.60	0.00	-46.19	42.94	-	-	68.2	-25.26	360	101	H
			3.032825	57.23	PK-U	33.00	0.00	-46.48	43.75	-	-	68.2	-24.45	360	101	V
			3.044879	56.78	PK-U	33.00	0.00	-46.50	43.28	-	-	68.2	-24.92	360	101	H
			10.037086	54.17	PK-U	37.70	0.00	-42.80	49.07	-	-	68.2	-19.13	360	101	V
			10.093638	54.92	PK-U	37.70	0.00	-42.94	49.68	-	-	68.2	-18.52	360	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

40MHz

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
HT40	5510	6+5	* 12.253821	41.44	ADR	39.00	0.00	-41.52	38.92	54	-15.08	-	-	360	101	V
			* 12.266002	41.39	ADR	38.90	0.00	-41.40	38.89	54	-15.11	-	-	360	101	H
			* 12.273086	53.09	PK-U	38.90	0.00	-41.29	50.70	-	-	74	-23.3	360	101	H
			* 12.278368	52.89	PK-U	38.90	0.00	-41.10	50.69	-	-	74	-23.31	360	101	V
			* 2.680728	46.29	ADR	32.20	0.00	-46.80	31.69	54	-22.31	-	-	360	199	H
			* 2.682714	58.34	PK-U	32.20	0.00	-46.87	43.67	-	-	74	-30.33	360	199	H
			* 2.685451	46.36	ADR	32.20	0.00	-46.80	31.76	54	-22.24	-	-	360	199	V
			* 2.698957	58.24	PK-U	32.20	0.00	-46.90	43.54	-	-	74	-30.46	360	199	V
			* 8.204204	53.64	PK-U	36.10	0.00	-42.90	46.84	-	-	74	-27.16	360	200	V
			* 8.229622	42.22	ADR	36.10	0.00	-42.70	35.62	54	-18.38	-	-	360	200	V
			* 8.231309	42.32	ADR	36.10	0.00	-42.70	35.72	54	-18.28	-	-	360	199	H
			* 8.234225	53.73	PK-U	36.10	0.00	-42.80	47.03	-	-	74	-26.97	360	199	H
			* 12.5204	42.07	ADR	38.70	0.00	-41.10	39.67	54	-14.33	-	-	360	101	H
			* 12.520907	41.66	ADR	38.70	0.00	-41.10	39.26	54	-14.74	-	-	360	200	V
			* 12.531569	54.34	PK-U	38.70	0.00	-41.11	51.93	-	-	74	-22.07	360	101	H
	* 12.54984		53.50	PK-U	38.80	0.00	-41.02	51.28	-	-	74	-22.72	360	200	V	
	* 2.202975		46.21	ADR	31.70	0.00	-46.70	31.21	54	-22.79	-	-	360	200	V	
	* 2.208108		57.88	PK-U	31.80	0.00	-46.59	43.09	-	-	74	-30.91	360	200	V	
	* 2.31421		58.16	PK-U	31.90	0.00	-46.98	43.08	-	-	74	-30.92	360	101	H	
	* 2.320136		46.17	ADR	31.80	0.00	-46.91	31.06	54	-22.94	-	-	360	101	H	
	* 7.331632		53.60	PK-U	35.50	0.00	-43.60	45.50	-	-	74	-28.5	360	200	V	
	* 7.348427		39.74	ADR	35.50	0.00	-43.74	31.50	54	-22.5	-	-	360	101	H	
	* 7.36289		42.05	ADR	35.50	0.00	-43.40	34.15	54	-19.85	-	-	360	200	V	
	* 7.36344		51.80	PK-U	35.50	0.00	-43.40	43.90	-	-	74	-30.1	360	101	H	
	* 12.126409		53.10	PK-U	39.00	0.00	-41.10	51.00	-	-	74	-23	1	200	V	
	* 12.126604		41.24	ADR	39.00	0.00	-41.10	39.14	54	-14.86	-	-	1	200	V	
	* 12.168351		42.04	ADR	39.00	0.00	-41.34	39.70	54	-14.3	-	-	1	101	H	
	* 12.169151		54.24	PK-U	39.00	0.00	-41.40	51.84	-	-	74	-22.16	1	101	H	
	* 2.252046		58.48	PK-U	32.00	0.00	-46.60	43.88	-	-	74	-30.12	1	101	H	
	* 2.264479		46.50	ADR	32.00	0.00	-46.70	31.80	54	-22.2	-	-	1	101	H	
	* 2.269084		58.07	PK-U	32.00	0.00	-46.70	43.37	-	-	74	-30.63	1	101	V	
	* 2.269564		46.31	ADR	32.00	0.00	-46.70	31.61	54	-22.39	-	-	1	101	V	
	* 7.561262		52.84	PK-U	35.60	0.00	-42.93	45.51	-	-	74	-28.49	1	101	V	
	* 7.580889		53.98	PK-U	35.70	0.00	-43.00	46.68	-	-	74	-27.32	1	199	H	
	* 7.586569		40.92	ADR	35.70	0.00	-43.10	33.52	54	-20.48	-	-	1	101	V	
	* 7.591831		41.97	ADR	35.70	0.00	-43.00	34.67	54	-19.33	-	-	1	199	H	
	* 12.631906		52.96	PK-U	38.80	0.00	-40.90	50.86	-	-	74	-23.14	3	101	V	
	* 12.643764		41.34	ADR	38.80	0.00	-41.18	38.96	54	-15.04	-	-	3	101	H	
	* 12.64643		52.92	PK-U	38.80	0.00	-41.10	50.62	-	-	74	-23.38	3	101	H	
	* 12.646613		41.29	ADR	38.80	0.00	-41.10	38.99	54	-15.01	-	-	3	101	V	
	* 2.25518		46.21	ADR	32.00	0.00	-46.70	31.51	54	-22.49	-	-	3	101	V	
	* 2.261666		46.23	ADR	32.00	0.00	-46.67	31.56	54	-22.44	-	-	3	101	H	
	* 2.267186		57.79	PK-U	32.00	0.00	-46.70	43.09	-	-	74	-30.91	3	101	H	
	* 2.27896		57.87	PK-U	32.00	0.00	-46.80	43.07	-	-	74	-30.93	3	101	V	
	* 7.628926		41.94	ADR	35.70	0.00	-43.00	34.64	54	-19.36	-	-	3	101	H	
	* 7.638498		42.21	ADR	35.70	0.00	-42.95	34.96	54	-19.04	-	-	3	101	V	
	* 7.639449		53.68	PK-U	35.70	0.00	-43.00	46.38	-	-	74	-27.62	3	101	V	
	* 7.643766		54.28	PK-U	35.70	0.00	-43.08	46.90	-	-	74	-27.1	3	101	H	

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

80MHz

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
VHT80	5530	6+5	* 16.028365	43.24	ADR	40.30	0.00	-42.17	41.37	54	-12.63	-	-	0	101	V
			* 16.037641	54.83	PK-U	40.40	0.00	-41.90	53.33	-	-	74	-20.67	0	101	H
			* 16.040191	54.82	PK-U	40.40	0.00	-41.90	53.32	-	-	74	-20.68	0	101	V
			* 16.054055	43.21	ADR	40.30	0.00	-41.90	41.61	54	-12.39	-	-	0	101	H
			* 2.325744	58.00	PK-U	31.80	0.00	-46.90	42.90	-	-	74	-31.1	0	101	H
			* 2.327284	46.45	ADR	31.80	0.00	-46.97	31.28	54	-22.72	-	-	0	101	H
			* 2.332428	58.40	PK-U	31.80	0.00	-46.96	43.24	-	-	74	-30.76	0	101	V
			* 2.335081	46.37	ADR	31.80	0.00	-46.91	31.26	54	-22.74	-	-	0	101	V
			* 8.438296	54.12	PK-U	36.00	0.00	-42.70	47.42	-	-	74	-26.58	0	101	H
			* 8.44859	42.56	ADR	36.00	0.00	-42.66	35.90	54	-18.1	-	-	0	101	V
			* 8.449728	54.52	PK-U	36.00	0.00	-42.63	47.89	-	-	74	-26.11	0	101	V
			* 8.457802	42.53	ADR	36.00	0.00	-42.50	36.03	54	-17.97	-	-	0	101	H
	5610		* 12.052767	56.59	PK-U	38.90	0.00	-44.43	51.06	-	-	74	-22.94	214	100	H
			* 12.040471	44.70	ADR	38.90	0.00	-44.55	39.05	54	-14.95	-	-	214	100	H
			* 12.055954	56.01	PK-U	38.90	0.00	-44.47	50.44	-	-	74	-23.56	214	200	V
			* 12.067109	44.37	ADR	38.90	0.00	-44.48	38.79	54	-15.21	-	-	214	200	V
			6.97173	55.75	PK-U	35.80	0.00	-46.10	45.45	-	-	68.2	-22.75	214	200	V
			6.971838	56.52	PK-U	35.80	0.00	-46.11	46.21	-	-	68.2	-21.99	214	100	H
			8.764632	56.55	PK-U	36.20	0.00	-45.58	47.17	-	-	68.2	-21.03	214	201	V
			8.781924	56.33	PK-U	36.20	0.00	-45.66	46.87	-	-	68.2	-21.33	214	100	H
			8.684654	56.11	PK-U	36.10	0.00	-45.35	46.86	-	-	68.2	-21.34	355	201	V
			8.691909	56.29	PK-U	36.10	0.00	-45.34	47.05	-	-	68.2	-21.15	355	100	H
			10.418213	56.75	PK-U	37.70	0.00	-45.09	49.36	-	-	68.2	-18.84	355	100	H
			10.422354	57.31	PK-U	37.70	0.00	-45.21	49.80	-	-	68.2	-18.4	355	200	V
			14.191485	56.18	PK-U	39.20	0.00	-42.95	52.43	-	-	68.2	-15.77	355	200	V
			14.200648	56.56	PK-U	39.20	0.00	-43.15	52.61	-	-	68.2	-15.59	355	100	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

160MHz

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filtr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
VHT160	5570	6+5	1.972184	58.08	PK-U	31.40	0.00	-46.40	43.08	-	-	68.2	-25.12	360	200	H
			1.981763	58.11	PK-U	31.40	0.00	-46.40	43.11	-	-	68.2	-25.09	360	101	V
			3.098439	56.97	PK-U	33.10	0.00	-46.06	44.01	-	-	68.2	-24.19	360	101	H
			3.132014	56.62	PK-U	33.00	0.00	-46.00	43.62	-	-	68.2	-24.58	360	101	V
			9.792224	54.05	PK-U	37.20	0.00	-42.42	48.83	-	-	68.2	-19.37	360	200	H
			9.803163	54.60	PK-U	37.30	0.00	-42.60	49.30	-	-	68.2	-18.9	360	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.1.62. 802.11be SU MIMO MODE IN UNII-2C BAND – SPURIOUS EMISSIONS

20MHz

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 SU Mode	5500	6+5	* 15.678941	55.35	PK-U	40.40	0.00	-42.70	53.05	-	-	74	-20.95	360	200	H
			* 15.687981	43.58	ADR	40.40	0.00	-42.70	41.28	54	-12.72	-	-	360	200	H
			* 15.694307	43.48	ADR	40.40	0.00	-42.80	41.08	54	-12.92	-	-	360	101	V
			* 15.699836	55.24	PK-U	40.40	0.00	-42.72	52.92	-	-	74	-21.08	360	101	V
			* 2.737899	46.71	ADR	32.40	0.00	-47.39	31.72	54	-22.28	-	-	360	200	V
			* 2.738427	58.48	PK-U	32.40	0.00	-47.31	43.57	-	-	74	-30.43	360	200	H
			* 2.740392	58.28	PK-U	32.40	0.00	-47.26	43.42	-	-	74	-30.58	360	200	V
			* 2.745107	46.65	ADR	32.40	0.00	-47.40	31.65	54	-22.35	-	-	360	200	H
			* 8.291790	54.94	PK-U	36.00	0.00	-42.58	48.36	-	-	74	-25.64	360	200	H
			* 8.305359	43.02	ADR	36.00	0.00	-42.64	36.38	54	-17.62	-	-	360	200	H
			* 8.314438	43.19	ADR	36.00	0.00	-43.00	36.19	54	-17.81	-	-	360	200	V
			* 8.315332	54.76	PK-U	36.00	0.00	-43.00	47.76	-	-	74	-26.24	360	200	V
	5580		* 11.983545	42.46	ADR	39.00	0.00	-41.50	39.96	54	-14.04	-	-	360	101	H
			* 11.985447	54.19	PK-U	39.00	0.00	-41.40	51.79	-	-	74	-22.21	360	200	V
			* 11.989207	42.38	ADR	39.00	0.00	-41.28	40.10	54	-13.9	-	-	360	200	V
			* 12.016296	54.51	PK-U	39.00	0.00	-41.66	51.85	-	-	74	-22.15	360	101	H
			* 2.822529	58.26	PK-U	32.40	0.00	-46.85	43.81	-	-	74	-30.19	360	101	H
			* 2.843440	58.90	PK-U	32.50	0.00	-47.24	44.16	-	-	74	-29.84	360	200	V
			* 2.849389	46.66	ADR	32.60	0.00	-47.26	32.00	54	-22	-	-	360	101	H
			* 2.851934	46.64	ADR	32.60	0.00	-47.30	31.94	54	-22.06	-	-	360	200	V
			* 7.546038	41.74	ADR	35.70	0.00	-43.00	34.44	54	-19.56	-	-	360	101	H
			* 7.548589	53.92	PK-U	35.70	0.00	-43.04	46.58	-	-	74	-27.42	360	101	H
			* 7.550530	41.83	ADR	35.70	0.00	-43.05	34.48	54	-19.52	-	-	360	200	V
			* 7.551259	53.73	PK-U	35.70	0.00	-43.00	46.43	-	-	74	-27.57	360	200	V
	5700		* 16.030222	43.00	ADR	40.30	0.00	-42.18	41.12	54	-12.88	-	-	0	200	V
			* 16.039095	55.21	PK-U	40.40	0.00	-41.90	53.71	-	-	74	-20.29	0	101	H
			* 16.061491	42.80	ADR	40.30	0.00	-42.20	40.90	54	-13.1	-	-	0	101	H
			* 16.061813	54.56	PK-U	40.30	0.00	-42.20	52.66	-	-	74	-21.34	0	200	V
			* 2.797436	46.89	ADR	32.40	0.00	-47.20	32.09	54	-21.91	-	-	0	199	V
			* 2.799859	46.86	ADR	32.40	0.00	-47.20	32.06	54	-21.94	-	-	0	199	H
			* 2.801179	58.37	PK-U	32.50	0.00	-47.12	43.75	-	-	74	-30.25	0	199	H
			* 2.802596	58.79	PK-U	32.50	0.00	-47.20	44.09	-	-	74	-29.91	0	199	V
			* 8.409134	54.27	PK-U	36.00	0.00	-42.81	47.46	-	-	74	-26.54	0	199	H
			* 8.427374	42.47	ADR	36.00	0.00	-42.80	35.67	54	-18.33	-	-	0	101	V
			* 8.434538	42.53	ADR	36.00	0.00	-42.90	35.63	54	-18.37	-	-	0	199	H
			* 8.450943	54.68	PK-U	36.00	0.00	-42.60	48.08	-	-	74	-25.92	0	101	V
	5720		* 12.096574	42.06	ADR	39.10	0.00	-41.40	39.76	54	-14.24	-	-	0	101	V
			* 12.100060	54.30	PK-U	39.10	0.00	-41.40	52.00	-	-	74	-22	0	101	H
			* 12.104627	54.22	PK-U	39.10	0.00	-41.24	52.08	-	-	74	-21.92	0	101	V
			* 12.124896	41.94	ADR	39.00	0.00	-41.19	39.75	54	-14.25	-	-	0	101	H
			* 2.208808	58.16	PK-U	31.80	0.00	-46.52	43.44	-	-	74	-30.56	0	199	H
			* 2.210758	57.89	PK-U	31.80	0.00	-46.52	43.17	-	-	74	-30.83	0	199	V
			* 2.215292	46.30	ADR	31.80	0.00	-46.57	31.53	54	-22.47	-	-	0	199	H
			* 2.275225	46.10	ADR	32.00	0.00	-46.70	31.40	54	-22.6	-	-	0	199	V
			* 8.112024	53.43	PK-U	36.20	0.00	-42.50	47.13	-	-	74	-26.87	0	101	V
			* 8.133265	53.81	PK-U	36.10	0.00	-42.90	47.01	-	-	74	-26.99	0	101	H
			* 8.143460	42.10	ADR	36.10	0.00	-42.80	35.40	54	-18.6	-	-	0	101	H
			* 8.147615	42.04	ADR	36.10	0.00	-42.90	35.24	54	-18.76	-	-	0	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

40MHz

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/CbI/ Fltr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT40 SU Mode	5510	6+5	1.973264	58.09	PK-U	31.40	0.00	-46.40	43.09	-	-	68.2	-25.11	360	200	H
			1.979270	57.94	PK-U	31.40	0.00	-46.53	42.81	-	-	68.2	-25.39	360	200	V
			3.097139	56.39	PK-U	33.10	0.00	-46.01	43.48	-	-	68.2	-24.72	360	200	V
			3.142787	56.41	PK-U	33.00	0.00	-45.80	43.61	-	-	68.2	-24.59	360	200	H
			10.105737	54.09	PK-U	37.70	0.00	-42.23	49.56	-	-	68.2	-18.64	360	101	V
	5550		10.106617	55.12	PK-U	37.70	0.00	-42.14	50.68	-	-	68.2	-17.52	360	200	H
			2.027027	58.31	PK-U	31.50	0.00	-46.50	43.31	-	-	68.2	-24.89	360	101	H
			2.031936	58.60	PK-U	31.50	0.00	-46.40	43.70	-	-	68.2	-24.5	360	200	V
			3.106111	57.08	PK-U	33.10	0.00	-46.00	44.18	-	-	68.2	-24.02	360	101	V
			3.129349	56.91	PK-U	33.00	0.00	-45.93	43.98	-	-	68.2	-24.22	360	101	H
	5670		10.145689	54.07	PK-U	37.70	0.00	-42.60	49.17	-	-	68.2	-19.03	360	101	H
			10.146116	54.50	PK-U	37.70	0.00	-42.61	49.59	-	-	68.2	-18.61	360	200	V
			1.970546	58.65	PK-U	31.40	0.00	-46.45	43.60	-	-	68.2	-24.6	360	200	V
			1.982536	58.41	PK-U	31.40	0.00	-46.40	43.41	-	-	68.2	-24.79	360	101	H
			3.097019	56.86	PK-U	33.10	0.00	-46.00	43.96	-	-	68.2	-24.24	360	200	V
	5710		3.101929	56.81	PK-U	33.10	0.00	-45.91	44.00	-	-	68.2	-24.2	360	101	H
			10.068974	54.75	PK-U	37.70	0.00	-42.70	49.75	-	-	68.2	-18.45	360	200	H
			10.076848	54.42	PK-U	37.70	0.00	-42.70	49.42	-	-	68.2	-18.78	360	200	V
			2.034793	58.53	PK-U	31.60	0.00	-46.34	43.79	-	-	68.2	-24.41	360	200	H
			2.036801	58.77	PK-U	31.60	0.00	-46.42	43.95	-	-	68.2	-24.25	360	200	V
			3.131045	56.84	PK-U	33.00	0.00	-45.90	43.94	-	-	68.2	-24.26	360	200	V
			3.152705	56.38	PK-U	33.00	0.00	-45.64	43.74	-	-	68.2	-24.46	360	101	H
			10.116336	54.97	PK-U	37.70	0.00	-41.70	50.97	-	-	68.2	-17.23	360	200	V
			10.131616	54.25	PK-U	37.70	0.00	-42.10	49.85	-	-	68.2	-18.35	360	200	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

80MHz

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filt/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT80 SU Mode	5530	6+5	* 12.382744	53.60	PK-U	38.80	0.00	-40.53	51.87	-	-	74	-22.13	360	200	H
			* 12.384829	53.77	PK-U	38.80	0.00	-40.32	52.25	-	-	74	-21.75	360	200	V
			* 12.395006	41.86	ADR	38.80	0.00	-40.70	39.96	54	-14.04	-	-	360	200	H
			* 12.398313	42.13	ADR	38.80	0.00	-40.80	40.13	54	-13.87	-	-	360	200	V
			* 2.739848	46.74	ADR	32.40	0.00	-47.28	31.86	54	-22.14	-	-	360	200	H
			* 2.744044	46.55	ADR	32.40	0.00	-47.30	31.65	54	-22.35	-	-	360	101	V
			* 2.744050	58.60	PK-U	32.40	0.00	-47.31	43.69	-	-	74	-30.31	360	101	V
			* 2.748468	58.28	PK-U	32.40	0.00	-47.35	43.33	-	-	74	-30.67	360	200	H
			* 8.224308	54.13	PK-U	36.10	0.00	-42.80	47.43	-	-	74	-26.57	360	200	H
			* 8.246387	54.75	PK-U	36.10	0.00	-42.80	48.05	-	-	74	-25.95	360	200	V
			* 8.246609	42.79	ADR	36.10	0.00	-42.80	36.09	54	-17.91	-	-	360	200	V
			* 8.247037	42.72	ADR	36.10	0.00	-42.80	36.02	54	-17.98	-	-	360	200	H
	* 12.639780		54.11	PK-U	38.80	0.00	-41.06	51.85	-	-	74	-22.15	360	200	V	
	* 12.655137		42.27	ADR	38.80	0.00	-41.53	39.54	54	-14.46	-	-	360	200	H	
	* 12.656541		54.21	PK-U	38.80	0.00	-41.65	51.36	-	-	74	-22.64	360	200	H	
	* 12.656731		42.19	ADR	38.80	0.00	-41.63	39.36	54	-14.64	-	-	360	200	V	
	* 2.677065		46.42	ADR	32.20	0.00	-47.00	31.62	54	-22.38	-	-	360	200	H	
	* 2.679358		58.09	PK-U	32.20	0.00	-46.93	43.36	-	-	74	-30.64	360	200	H	
	* 2.684450		46.15	ADR	32.20	0.00	-46.80	31.55	54	-22.45	-	-	360	200	V	
	* 2.685337		58.05	PK-U	32.20	0.00	-46.80	43.45	-	-	74	-30.55	360	200	V	
	* 8.216124		42.26	ADR	36.10	0.00	-42.60	35.76	54	-18.24	-	-	360	101	V	
	* 8.218446		54.17	PK-U	36.10	0.00	-42.60	47.67	-	-	74	-26.33	360	101	H	
	* 8.219357		42.33	ADR	36.10	0.00	-42.64	35.79	54	-18.21	-	-	360	101	H	
	* 8.222778		54.18	PK-U	36.10	0.00	-42.80	47.48	-	-	74	-26.52	360	101	V	
	* 11.860087		53.77	PK-U	38.90	0.00	-41.50	51.17	-	-	74	-22.83	1	101	V	
	* 11.872235		41.90	ADR	38.90	0.00	-41.50	39.30	54	-14.7	-	-	1	101	H	
	* 11.883737		53.91	PK-U	38.90	0.00	-41.50	51.31	-	-	74	-22.69	1	101	H	
	* 11.895390		41.97	ADR	38.90	0.00	-41.66	39.21	54	-14.79	-	-	1	101	V	
	* 2.794430		46.90	ADR	32.50	0.00	-47.14	32.26	54	-21.74	-	-	1	101	H	
	* 2.796023		58.82	PK-U	32.50	0.00	-47.20	44.12	-	-	74	-29.88	1	101	H	
	* 2.796556		59.13	PK-U	32.40	0.00	-47.20	44.33	-	-	74	-29.67	1	200	V	
	* 2.801516		46.88	ADR	32.50	0.00	-47.15	32.23	54	-21.77	-	-	1	200	V	
	* 7.506110		41.91	ADR	35.60	0.00	-43.00	34.51	54	-19.49	-	-	1	101	H	
	* 7.525955		41.92	ADR	35.70	0.00	-43.30	34.32	54	-19.68	-	-	1	200	V	
	* 7.541013		53.62	PK-U	35.70	0.00	-43.10	46.22	-	-	74	-27.78	1	200	V	
	* 7.543394		54.03	PK-U	35.70	0.00	-43.06	46.67	-	-	74	-27.33	1	101	H	

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

160MHz

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filt/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT160 SU Mode	5570	6+5	* 12.318842	41.55	ADR	38.80	0.00	-41.02	39.33	54	-14.67	-	-	0	101	H
			* 12.322674	53.02	PK-U	38.80	0.00	-40.83	50.99	-	-	74	-23.01	0	101	V
			* 12.348166	53.43	PK-U	38.80	0.00	-41.08	51.15	-	-	74	-22.85	0	101	H
			* 12.350981	41.51	ADR	38.80	0.00	-41.10	39.21	54	-14.79	-	-	0	101	V
			* 2.787915	58.60	PK-U	32.50	0.00	-47.10	44.00	-	-	74	-30	0	200	H
			* 2.790201	58.63	PK-U	32.50	0.00	-47.18	43.95	-	-	74	-30.05	0	200	V
			* 2.795301	46.98	ADR	32.50	0.00	-47.20	32.28	54	-21.72	-	-	0	200	V
			* 2.797948	46.98	ADR	32.40	0.00	-47.20	32.18	54	-21.82	-	-	0	200	H
			* 8.325541	43.03	ADR	36.00	0.00	-42.80	36.23	54	-17.77	-	-	0	200	V
			* 8.329542	54.59	PK-U	36.00	0.00	-42.80	47.79	-	-	74	-26.21	0	200	H
			* 8.330118	54.47	PK-U	36.00	0.00	-42.80	47.67	-	-	74	-26.33	0	200	V
			* 8.341778	42.95	ADR	36.00	0.00	-42.50	36.45	54	-17.55	-	-	0	200	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.1.63. 802.11be MIMO PARTIAL RU MODE IN UNII-2C BAND – SPURIOUS EMISSIONS

20MHz

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filt/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 52+26T - RU70	5500	6+5	* 3.729660	44.93	ADR	33.20	0.00	-47.30	30.83	54	-23.17	-	-	360	101	V
			* 3.733653	44.87	ADR	33.20	0.00	-47.22	30.85	54	-23.15	-	-	360	199	H
			* 3.734140	57.07	PK-U	33.20	0.00	-47.21	43.06	-	-	74	-30.94	360	101	V
			* 3.742540	56.47	PK-U	33.20	0.00	-47.12	42.55	-	-	74	-31.45	360	199	H
			10.066826	54.83	PK-U	37.30	0.00	-44.97	47.16	-	-	68.2	-21.04	360	101	H
			10.092917	54.97	PK-U	37.30	0.00	-45.11	47.16	-	-	68.2	-21.04	360	101	V
			16.741184	48.70	PK-U	42.10	0.00	-40.40	50.40	-	-	68.2	-17.8	360	101	H
			16.752486	48.76	PK-U	42.10	0.00	-40.52	50.34	-	-	68.2	-17.86	360	101	V
EHT20 52+26T - RU71	5580	6+5	* 3.851700	56.77	PK-U	33.40	0.00	-47.20	42.97	-	-	74	-31.03	360	200	V
			* 3.852460	45.14	ADR	33.40	0.00	-47.18	31.36	54	-22.64	-	-	360	200	V
			* 3.859000	45.38	ADR	33.40	0.00	-47.08	31.70	54	-22.3	-	-	360	101	H
			* 3.864407	56.93	PK-U	33.40	0.00	-47.18	43.15	-	-	74	-30.85	360	101	H
			16.968539	48.80	PK-U	42.00	0.00	-39.94	50.86	-	-	68.2	-17.34	360	101	V
			16.976457	48.58	PK-U	42.00	0.00	-39.86	50.72	-	-	68.2	-17.48	360	101	H
			9.823831	55.65	PK-U	37.00	0.00	-45.34	47.31	-	-	68.2	-20.89	360	101	H
			9.840442	55.51	PK-U	37.00	0.00	-45.25	47.26	-	-	68.2	-20.94	360	101	V
EHT20 52+26T - RU72	5700	6+5	* 15.753963	49.74	PK-U	41.10	0.00	-40.86	49.98	-	-	74	-24.02	360	101	H
			* 15.726443	37.94	ADR	41.00	0.00	-40.87	38.07	54	-15.93	-	-	360	101	H
			* 15.762486	49.84	PK-U	41.10	0.00	-40.92	50.02	-	-	74	-23.98	360	101	V
			* 15.775344	38.12	ADR	41.10	0.00	-41.07	38.15	54	-15.85	-	-	360	101	V
			3.044539	57.59	PK-U	32.90	0.00	-47.68	42.81	-	-	68.2	-25.39	360	200	V
			3.059499	57.61	PK-U	32.90	0.00	-47.75	42.76	-	-	68.2	-25.44	360	101	H
			9.765902	55.26	PK-U	37.00	0.00	-45.50	46.76	-	-	68.2	-21.44	360	101	V
			9.771622	55.34	PK-U	37.00	0.00	-45.50	46.84	-	-	68.2	-21.36	360	101	H
			* 8.095493	55.03	PK-U	35.90	0.00	-44.75	46.18	-	-	74	-27.82	360	101	H
			* 8.098466	43.49	ADR	35.90	0.00	-44.71	34.68	54	-19.32	-	-	360	101	H
	5720		* 8.094895	55.67	PK-U	35.90	0.00	-44.75	46.82	-	-	74	-27.18	360	101	V
			* 8.097859	43.24	ADR	35.90	0.00	-44.71	34.43	54	-19.57	-	-	360	101	V
			3.071115	57.75	PK-U	33.00	0.00	-47.81	42.94	-	-	68.2	-25.26	360	101	H
			3.082949	57.58	PK-U	33.00	0.00	-47.86	42.72	-	-	68.2	-25.48	360	200	V
			13.678181	51.04	PK-U	39.30	0.00	-42.41	47.93	-	-	68.2	-20.27	360	200	V
			13.685867	51.94	PK-U	39.30	0.00	-42.44	48.80	-	-	68.2	-19.4	360	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

80MHz

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filt/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT80 484+242T - RU91	5530	6+5	1.970362	58.01	PK-U	31.30	0.00	-46.46	42.85	-	-	68.2	-25.35	360	200	H
			1.974905	58.26	PK-U	31.40	0.00	-46.49	43.17	-	-	68.2	-25.03	360	200	V
			3.088506	57.29	PK-U	33.20	0.00	-46.20	44.29	-	-	68.2	-23.91	360	200	V
			3.106825	57.34	PK-U	33.10	0.00	-46.00	44.44	-	-	68.2	-23.76	360	200	H
			10.086659	54.44	PK-U	37.70	0.00	-42.90	49.24	-	-	68.2	-18.96	360	200	H
			10.089432	54.41	PK-U	37.70	0.00	-42.90	49.21	-	-	68.2	-18.99	360	200	V
EHT80 484+242T - RU92	5690	6+5	* 9.087912	56.30	PK-U	36.40	0.00	-45.33	47.37	-	-	74	-26.63	154	100	H
			* 9.084847	44.53	ADR	36.40	0.00	-45.29	35.64	54	-18.36	-	-	154	100	H
			* 9.071712	56.51	PK-U	36.40	0.00	-45.32	47.59	-	-	74	-26.41	154	200	V
			* 9.086040	44.41	ADR	36.40	0.00	-45.33	35.48	54	-18.52	-	-	154	200	V
			7.019082	55.65	PK-U	35.80	0.00	-46.28	45.17	-	-	68.2	-23.03	154	201	V
			7.020924	56.26	PK-U	35.80	0.00	-46.31	45.75	-	-	68.2	-22.45	154	100	H
			12.986193	56.75	PK-U	38.90	0.00	-43.74	51.91	-	-	68.2	-16.29	154	200	V
EHT80 484+242T - RU93	5610	6+5	12.995717	56.32	PK-U	38.90	0.00	-43.53	51.69	-	-	68.2	-16.51	154	100	H
			* 8.108001	55.08	PK-U	35.90	0.00	-44.83	46.15	-	-	74	-27.85	360	199	H
			* 8.079979	43.10	ADR	35.90	0.00	-44.89	34.11	54	-19.89	-	-	360	199	H
			* 8.086831	55.06	PK-U	35.90	0.00	-44.90	46.06	-	-	74	-27.94	360	199	V
			* 8.086680	43.01	ADR	35.90	0.00	-44.90	34.01	54	-19.99	-	-	360	199	V
			3.044064	58.12	PK-U	32.90	0.00	-47.68	43.34	-	-	68.2	-24.86	360	101	V
			3.051291	57.92	PK-U	32.90	0.00	-47.73	43.09	-	-	68.2	-25.11	360	101	H
			13.807139	51.79	PK-U	39.40	0.00	-42.65	48.54	-	-	68.2	-19.66	360	101	V
			13.823400	52.26	PK-U	39.40	0.00	-42.60	49.06	-	-	68.2	-19.14	360	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

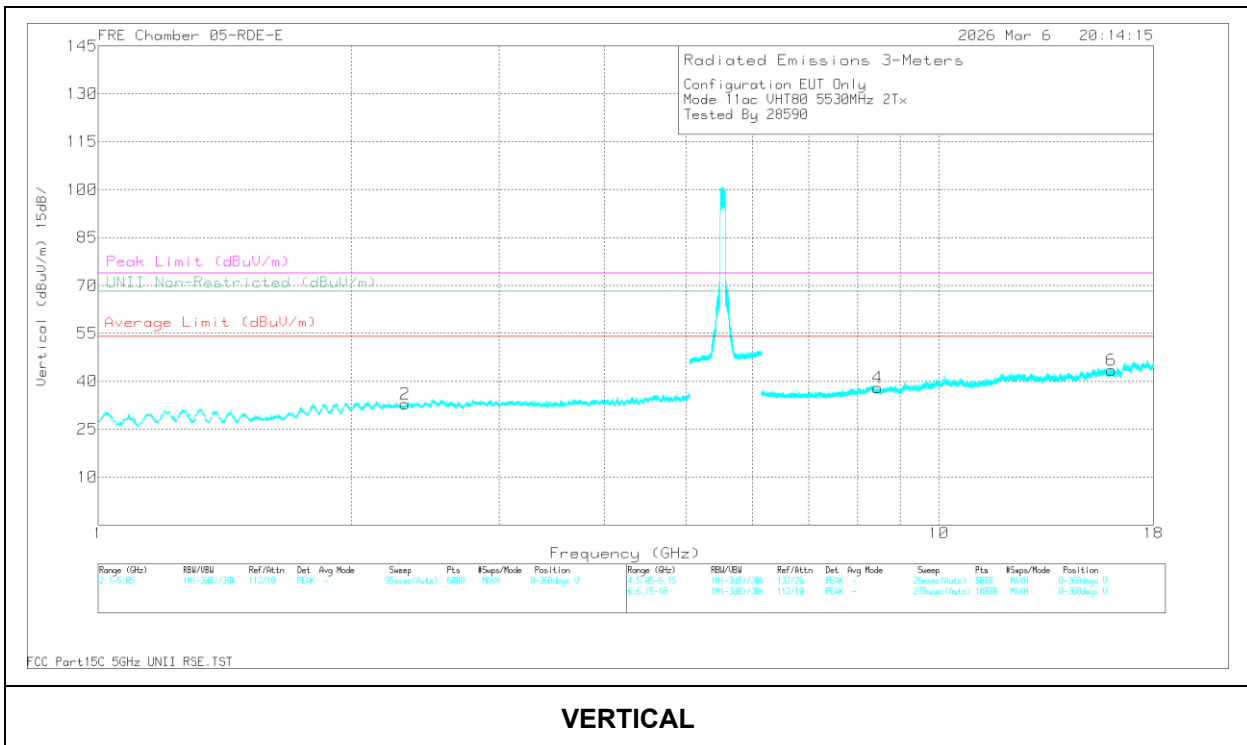
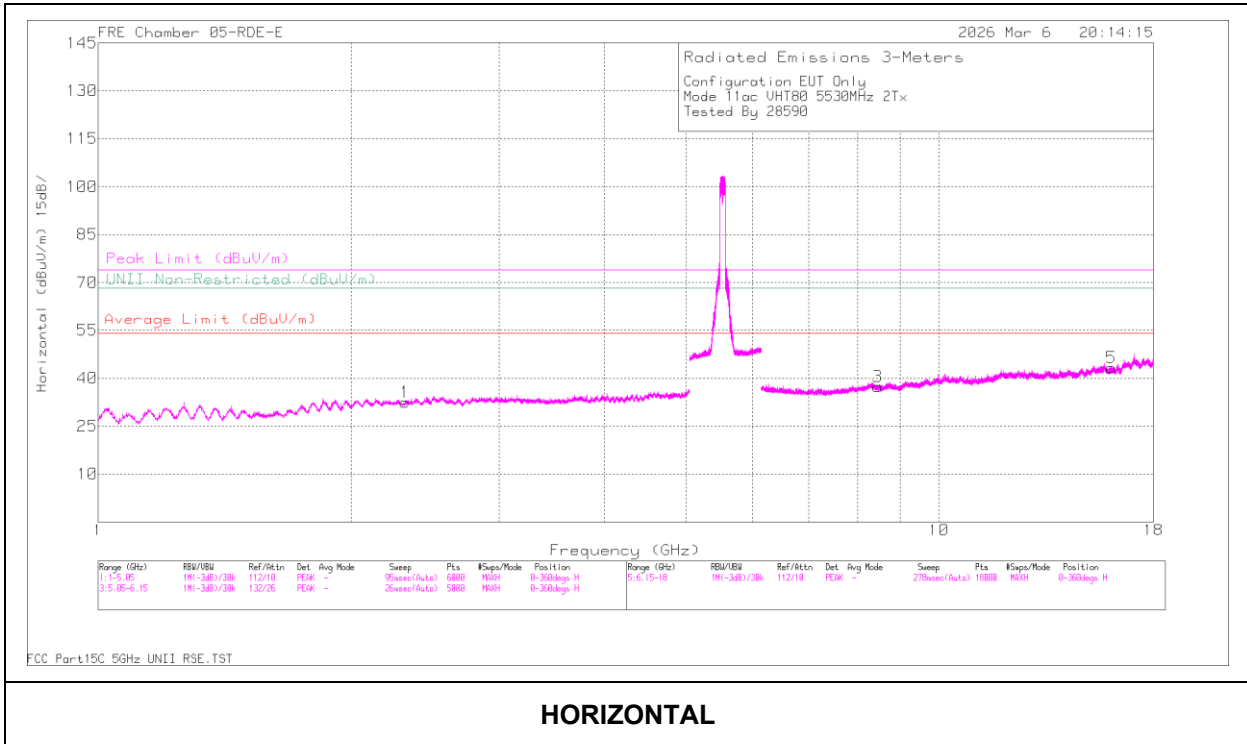
160MHz

UNII-2C (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filtr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT160 996+484+ 242T - RU98	5570	6+5	* 7.535424	55.59	PK-U	35.70	0.00	-45.52	45.77	-	-	74	-28.23	183	201	V
			* 7.548158	43.66	ADR	35.80	0.00	-45.50	33.96	54	-20.04	-	-	183	100	H
			* 7.571518	43.54	ADR	35.80	0.00	-45.50	33.84	54	-20.16	-	-	183	201	V
			* 7.573059	55.26	PK-U	35.80	0.00	-45.51	45.55	-	-	74	-28.45	183	100	H
			14.215387	56.67	PK-U	39.20	0.00	-43.47	52.40	-	-	68.2	-15.8	183	100	H
			14.234321	57.34	PK-U	39.20	0.00	-43.50	53.04	-	-	68.2	-15.16	183	200	V
			9.722880	56.80	PK-U	37.20	0.00	-45.39	48.61	-	-	68.2	-19.59	183	200	V
			9.752062	57.09	PK-U	37.20	0.00	-45.39	48.90	-	-	68.2	-19.3	183	100	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

WORST-CASE HARMONICS AND SPURIOUS EMISSIONS**802.11ac VHT80 / 5530 MHz / 2TX CDD**

Radiated Emissions

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filt/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
6	* 16.028365	43.24	ADR	40.30	0.00	-42.17	41.37	54	-12.63	-	-	0	101	V
5	* 16.037641	54.83	PK-U	40.40	0.00	-41.90	53.33	-	-	74	-20.67	0	101	H
6	* 16.040191	54.82	PK-U	40.40	0.00	-41.90	53.32	-	-	74	-20.68	0	101	V
5	* 16.054055	43.21	ADR	40.30	0.00	-41.90	41.61	54	-12.39	-	-	0	101	H
1	* 2.325744	58.00	PK-U	31.80	0.00	-46.90	42.90	-	-	74	-31.1	0	101	H
1	* 2.327284	46.45	ADR	31.80	0.00	-46.97	31.28	54	-22.72	-	-	0	101	H
2	* 2.332428	58.40	PK-U	31.80	0.00	-46.96	43.24	-	-	74	-30.76	0	101	V
2	* 2.335081	46.37	ADR	31.80	0.00	-46.91	31.26	54	-22.74	-	-	0	101	V
3	* 8.438296	54.12	PK-U	36.00	0.00	-42.70	47.42	-	-	74	-26.58	0	101	H
3	* 8.44859	42.56	ADR	36.00	0.00	-42.66	35.90	54	-18.1	-	-	0	101	V
4	* 8.449728	54.52	PK-U	36.00	0.00	-42.63	47.89	-	-	74	-26.11	0	101	V
4	* 8.457802	42.53	ADR	36.00	0.00	-42.50	36.03	54	-17.97	-	-	0	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.1.64. 802.11n/ac SISO MODE IN UNII-3 BAND BANDEDGE

UNII-3 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	ACF (dB/m)	Amp/CbI/FItr/ Pad (dB)	Conversion Factor (dB)	DCCF (dB)	Correct Reading EIRP (dBm)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
HT20	5745	6	5.725000	-25.12	Pk	35.10	-35.06	11.80	0.00	-13.28	27	-40.28	335	351	H
			5.643684	-48.64	Pk	35.00	-35.04	11.80	0.00	-36.88	-27	-9.88	335	351	H
			5.725000	-28.91	Pk	35.10	-35.06	11.80	0.00	-17.07	27	-44.07	16	379	V
			5.638300	-49.04	Pk	35.00	-35.09	11.80	0.00	-37.33	-27	-10.33	16	379	V
		5	5.647800	-47.11	Pk	34.20	-37.80	11.80	0.00	-38.91	-27	-11.91	185	130	H
			5.725000	-17.74	Pk	34.40	-37.60	11.80	0.00	-9.14	27	-36.14	185	130	H
			5.650467	-47.15	Pk	34.20	-37.80	11.80	0.00	-38.95	-26.65	-12.3	235	158	V
			5.725000	-24.01	Pk	34.40	-37.60	11.80	0.00	-15.41	27	-42.41	235	158	V
	5825	6	5.850000	-37.53	Pk	35.10	-34.85	11.80	0.00	-25.48	27	-52.48	8	315	H
			5.927880	-49.27	Pk	35.30	-34.74	11.80	0.00	-36.91	-27	-9.91	8	315	H
			5.850000	-40.66	Pk	35.10	-34.85	11.80	0.00	-28.61	27	-55.61	28	342	V
			5.932200	-49.42	Pk	35.30	-34.73	11.80	0.00	-37.05	-27	-10.05	28	342	V
		5	5.850000	-29.59	Pk	34.70	-37.30	11.80	0.00	-20.39	27	-47.39	188	122	H
			5.952900	-46.85	Pk	35.00	-37.10	11.80	0.00	-37.15	-27	-10.15	188	122	H
			5.850000	-33.56	Pk	34.70	-37.30	11.80	0.00	-24.36	27	-51.36	232	155	V
			5.995150	-47.73	Pk	35.10	-37.00	11.80	0.00	-37.83	-27	-10.83	232	155	V
HT40	5755	6	5.639934	-47.28	Pk	34.20	-37.80	11.80	0.00	-39.08	-27	-12.08	159	373	H
			5.725000	-24.15	Pk	34.40	-37.60	11.80	0.00	-15.55	27	-42.55	159	373	H
			5.635584	-48.20	Pk	34.20	-37.80	11.80	0.00	-40.00	-27	-13	205	171	V
			5.725000	-28.22	Pk	34.40	-37.60	11.80	0.00	-19.62	27	-46.62	205	171	V
		5	5.651134	-43.79	Pk	34.20	-37.80	11.80	0.00	-35.59	-26.16	-9.43	185	143	H
			5.725000	-17.66	Pk	34.40	-37.60	11.80	0.00	-9.06	27	-36.06	185	143	H
			5.645400	-47.42	Pk	34.20	-37.80	11.80	0.00	-39.22	-27	-12.22	225	171	V
			5.725000	-24.17	Pk	34.40	-37.60	11.80	0.00	-15.57	27	-42.57	225	171	V
	5795	6	5.850000	-42.39	Pk	34.70	-37.30	11.80	0.00	-33.19	27	-60.19	194	163	H
			5.934125	-48.04	Pk	35.00	-37.10	11.80	0.00	-38.34	-27	-11.34	194	163	H
			5.850000	-46.52	Pk	34.70	-37.30	11.80	0.00	-37.32	27	-64.32	201	160	V
			5.952325	-47.74	Pk	35.00	-37.10	11.80	0.00	-38.04	-27	-11.04	201	160	V
		5	5.850000	-36.28	Pk	34.90	-38.19	11.80	0.00	-27.77	27	-54.77	135	108	H
			5.939275	-46.58	Pk	35.10	-37.89	11.80	0.00	-37.57	-27	-10.57	135	108	H
			5.850000	-47.31	Pk	34.90	-38.19	11.80	0.00	-38.80	27	-65.8	135	140	V
			5.982775	-47.44	Pk	35.20	-37.86	11.80	0.00	-38.30	-27	-11.3	135	140	V
VHT80	5775 (Lower)	6	5.725000	-29.23	Pk	34.70	-33.90	11.80	0.00	-16.63	27	-43.63	188	210	H
			5.651703	-44.71	Pk	34.60	-34.00	11.80	0.00	-32.31	-25.74	-6.57	188	210	H
			5.725000	-29.92	Pk	34.70	-33.90	11.80	0.00	-17.32	27	-44.32	204	140	V
			5.653822	-46.17	Pk	34.60	-34.00	11.80	0.00	-33.77	-24.17	-9.6	204	140	V
		5	5.725000	-19.00	Pk	34.60	-38.47	11.80	0.00	-11.07	27	-38.07	98	143	H
			5.649851	-39.65	Pk	34.50	-38.59	11.80	0.00	-31.94	-27	-4.94	98	143	H
			5.725000	-31.15	Pk	34.60	-38.47	11.80	0.00	-23.22	27	-50.22	139	116	V
			5.643234	-46.28	Pk	34.50	-38.61	11.80	0.00	-38.59	-27	-11.59	139	116	V
	5775 (Upper)	6	5.850000	-38.19	Pk	35.00	-33.70	11.80	0.00	-25.09	27	-52.09	185	183	H
			5.925968	-52.21	Pk	35.10	-33.70	11.80	0.00	-39.01	-27	-12.01	185	183	H
			5.850000	-38.80	Pk	35.00	-33.70	11.80	0.00	-25.70	27	-52.7	232	165	V
			5.974350	-51.62	Pk	35.10	-33.70	11.80	0.00	-38.42	-27	-11.42	232	165	V
		5	5.850000	-24.85	Pk	34.70	-37.30	11.80	0.00	-15.65	27	-42.65	183	126	H
			5.924350	-43.88	Pk	35.00	-37.10	11.80	0.00	-34.18	-26.52	-7.66	183	126	H
			5.850000	-34.35	Pk	34.70	-37.30	11.80	0.00	-25.15	27	-52.15	233	138	V
			5.942250	-46.62	Pk	35.00	-37.10	11.80	0.00	-36.92	-27	-9.92	233	138	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.65. 802.11n/ac MIMO MODE IN UNII-3 BAND - BANDEDGE

UNII-3 (MIMO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	ACF (dB/m)	Amp/Cbl/ Filt/Pad (dB)	Conversi on Factor (dB)	DCCF (dB)	Correct Reading EIRP (dBm)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
HT20	5745	6+5	5.641717	-46.21	Pk	34.20	-37.80	11.80	0.00	-38.01	-27	-11.01	154	121	H
			5.725000	-19.95	Pk	34.40	-37.60	11.80	0.00	-11.35	27	-38.35	154	121	H
			5.645834	-47.59	Pk	34.20	-37.80	11.80	0.00	-39.39	-27	-12.39	240	160	V
			5.725000	-21.69	Pk	34.40	-37.60	11.80	0.00	-13.09	27	-40.09	240	160	V
	5.850000		-31.53	Pk	34.70	-37.30	11.80	0.00	-22.33	27	-49.33	184	212	H	
	5.966500		-46.81	Pk	35.00	-37.10	11.80	0.00	-37.11	-27	-10.11	184	212	H	
	5.850000		-36.64	Pk	34.70	-37.30	11.80	0.00	-27.44	27	-54.44	186	186	V	
	5.948975		-47.78	Pk	35.00	-37.10	11.80	0.00	-38.08	-27	-11.08	186	186	V	
HT40	5755	6+5	5.725000	-19.95	Pk	34.90	-34.60	11.80	0.00	-7.85	27	-34.85	275	198	H
			5.649450	-46.89	Pk	34.70	-34.60	11.80	0.00	-34.99	-27	-7.99	275	198	H
			5.725000	-20.14	Pk	34.90	-34.60	11.80	0.00	-8.04	27	-35.04	247	102	V
			5.628367	-48.48	Pk	34.70	-34.70	11.80	0.00	-36.68	-27	-9.68	247	102	V
	5.850000		-36.77	Pk	35.20	-34.40	11.80	0.00	-24.17	27	-51.17	260	151	H	
	5.934250		-51.46	Pk	35.40	-34.40	11.80	0.00	-38.66	-27	-11.66	260	151	H	
	5.850000		-44.25	Pk	35.20	-34.40	11.80	0.00	-31.65	27	-58.65	285	147	V	
	5.989000		-52.36	Pk	35.60	-34.30	11.80	0.00	-39.26	-27	-12.26	285	147	V	
VHT80	5775 (Lower)	6+5	5.648917	-45.95	Pk	34.50	-32.36	11.80	0.00	-32.01	-27	-5.01	357	184	H
			5.725000	-25.35	Pk	34.60	-32.20	11.80	0.00	-11.15	27	-38.15	357	184	H
			5.643334	-47.78	Pk	34.50	-32.41	11.80	0.00	-33.89	-27	-6.89	52	108	V
			5.725000	-29.89	Pk	34.60	-32.20	11.80	0.00	-15.69	27	-42.69	52	108	V
	5.850000		-32.71	Pk	35.00	-31.92	11.80	0.00	-17.83	27	-44.83	5	143	H	
	5.930075		-49.16	Pk	35.20	-31.84	11.80	0.00	-34	-27	-7	5	143	H	
	5.850000		-40.01	Pk	35.00	-31.92	11.80	0.00	-25.13	27	-52.13	38	187	V	
	5.969250		-49.90	Pk	35.20	-31.71	11.80	0.00	-34.61	-27	-7.61	38	187	V	

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.66. 802.11be SISO SU MODE IN UNII-3 BAND - BANDEDGE

UNII-3 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	ACF (dB/m)	Amp/Cbl/ Filt/Pad (dB)	Conversi on Factor (dB)	DCCF (dB)	Correct Reading EIRP (dBm)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 SU Mode	5745	6	5.725000	-28.24	Pk	34.70	-31.75	11.80	0.00	-13.49	27	-40.49	146	186	H
			5.636084	-49.72	Pk	34.70	-31.87	11.80	0.00	-35.09	-27	-8.09	146	186	H
			5.725000	-37.07	Pk	34.70	-31.75	11.80	0.00	-22.32	27	-49.32	248	186	V
			5.645567	-50.36	Pk	34.70	-31.83	11.80	0.00	-35.69	-27	-8.69	248	186	V
			5.628533	-49.95	Pk	34.50	-32.40	11.80	0.00	-36.05	-27	-9.05	177	113	H
		5	5.725000	-24.49	Pk	34.60	-32.20	11.80	0.00	-10.29	27	-37.29	177	113	H
			5.646934	-50.25	Pk	34.50	-32.42	11.80	0.00	-36.37	-27	-9.37	229	161	V
			5.725000	-28.43	Pk	34.60	-32.20	11.80	0.00	-14.23	27	-41.23	229	161	V
			5.850000	-33.09	Pk	35.00	-36.46	11.80	0.00	-22.75	27	-49.75	42	117	H
			5.992550	-48.48	Pk	35.30	-36.22	11.80	0.00	-37.60	-27	-10.6	42	117	H
	5825	6	5.850000	-33.22	Pk	35.00	-36.46	11.80	0.00	-22.88	27	-49.88	337	103	V
			5.978375	-48.84	Pk	35.30	-36.19	11.80	0.00	-37.93	-27	-10.93	337	103	V
			5.850000	-26.14	Pk	35.10	-34.85	11.80	0.00	-14.09	27	-41.09	11	270	H
			5.935320	-48.61	Pk	35.30	-34.71	11.80	0.00	-36.22	-27	-9.22	11	270	H
			5.850000	-30.83	Pk	35.10	-34.85	11.80	0.00	-18.78	27	-45.78	37	201	V
		5	5.931480	-49.13	Pk	35.30	-34.74	11.80	0.00	-36.77	-27	-9.77	37	201	V
			5.725000	-45.52	Pk	34.50	-17.00	11.80	0.00	-16.22	27	-43.22	337	207	H
			5.625019	-67.00	Pk	34.30	-17.00	11.80	0.00	-37.90	-27	-10.9	337	207	H
			5.725000	-50.07	Pk	34.50	-17.00	11.80	0.00	-20.77	27	-47.77	1	102	V
			5.636157	-66.47	Pk	34.30	-17.00	11.80	0.00	-37.37	-27	-10.37	1	102	V
			5.725000	-50.76	Pk	34.80	-36.54	11.80	0.00	-40.70	27	-67.7	320	132	H
EHT40 SU Mode	5755	6	5.647334	-48.88	Pk	34.60	-36.62	11.80	0.00	-39.10	-27	-12.1	320	132	H
			5.725000	-51.03	Pk	34.80	-36.54	11.80	0.00	-40.97	27	-67.97	320	132	V
			5.626750	-49.34	Pk	34.60	-36.62	11.80	0.00	-39.56	-27	-12.56	320	132	V
			5.850000	-46.70	Pk	35.00	-33.10	11.80	0.00	-33.00	27	-60	2	400	H
			5.935138	-53.21	Pk	35.20	-32.90	11.80	0.00	-39.11	-27	-12.11	2	400	H
		5	5.850000	-46.45	Pk	35.00	-33.10	11.80	0.00	-32.75	27	-59.75	49	136	V
			5.944308	-55.12	Pk	35.20	-32.90	11.80	0.00	-41.02	-27	-14.02	49	136	V
			5.850000	-36.75	Pk	34.90	-34.40	11.80	0.00	-24.45	27	-51.45	315	188	H
			5.972250	-49.13	Pk	35.30	-34.30	11.80	0.00	-36.33	-27	-9.33	315	188	H
			5.850000	-43.42	Pk	34.90	-34.40	11.80	0.00	-31.12	27	-58.12	352	167	V
	5795	6	5.955180	-49.42	Pk	35.20	-34.32	11.80	0.00	-36.74	-27	-9.74	352	167	V
			5.725000	-48.52	Pk	34.50	-17.00	11.80	0.00	-19.22	27	-46.22	14	119	H
			5.636889	-66.06	Pk	34.30	-17.00	11.80	0.00	-36.96	-27	-9.96	14	119	H
			5.725000	-48.53	Pk	34.50	-17.00	11.80	0.00	-19.23	27	-46.23	47	112	V
			5.647184	-65.83	Pk	34.30	-17.10	11.80	0.00	-36.83	-27	-9.83	47	112	V
		5	5.725000	-24.97	Pk	35.10	-35.06	11.80	0.00	-13.13	27	-40.13	7	163	H
			5.650067	-44.09	Pk	35.00	-35.13	11.80	0.00	-32.42	-26.95	-5.47	7	163	H
			5.725000	-31.65	Pk	35.10	-35.06	11.80	0.00	-19.81	27	-46.81	52	176	V
			5.643184	-47.76	Pk	35.00	-35.06	11.80	0.00	-36.02	-27	-9.02	52	176	V
			5.850000	-55.90	Pk	34.90	-16.00	11.80	0.00	-25.20	27	-52.2	17	156	H
EHT80 SU Mode	5775 (Lower)	6	5.979188	-66.81	Pk	35.20	-16.10	11.80	0.00	-35.91	-27	-8.91	17	156	H
			5.850000	-55.97	Pk	34.90	-16.00	11.80	0.00	-25.27	27	-52.27	359	152	V
			5.951059	-66.70	Pk	35.20	-16.00	11.80	0.00	-35.70	-27	-8.7	359	152	V
			5.850000	-25.98	Pk	35.10	-34.85	11.80	0.00	-13.93	27	-40.93	12	155	H
			5.925840	-47.35	Pk	35.30	-34.71	11.80	0.00	-34.96	-27	-7.96	12	155	H
		5	5.850000	-33.12	Pk	35.10	-34.85	11.80	0.00	-21.07	27	-48.07	56	173	V
			5.935470	-48.57	Pk	35.30	-34.71	11.80	0.00	-36.18	-27	-9.18	56	173	V
			5.725000	-48.52	Pk	34.50	-17.00	11.80	0.00	-19.22	27	-46.22	14	119	H
			5.636889	-66.06	Pk	34.30	-17.00	11.80	0.00	-36.96	-27	-9.96	14	119	H
			5.725000	-48.53	Pk	34.50	-17.00	11.80	0.00	-19.23	27	-46.23	47	112	V
			5.647184	-65.83	Pk	34.30	-17.10	11.80	0.00	-36.83	-27	-9.83	47	112	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.67. 802.11be SISO PARTIAL RU MODE IN UNII-3 BAND – BANDEDGE

UNII-3 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	ACF (dB/m)	Amp/Cbl/ Filt/Pad (dB)	Conversi on Factor (dB)	DCCF (dB)	Correct Reading EIRP (dBm)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 26T - RU0	5745	6	5.725000	-36.53	Pk	34.80	-36.54	11.80	0.00	-26.47	27	-53.47	36	191	H
			5.650001	-48.31	Pk	34.60	-36.63	11.80	0.00	-38.54	-27	-11.54	36	191	H
			5.725000	-42.61	Pk	34.80	-36.54	11.80	0.00	-32.55	27	-59.55	358	359	V
			5.648517	-48.61	Pk	34.60	-36.62	11.80	0.00	-38.83	-27	-11.83	358	359	V
			5.725000	-33.76	Pk	35.10	-35.06	11.80	0.00	-21.92	27	-48.92	342	152	H
		5	5.627950	-48.85	Pk	35.00	-34.96	11.80	0.00	-37.01	-27	-10.01	342	152	H
			5.725000	-36.60	Pk	35.10	-35.06	11.80	0.00	-24.76	27	-51.76	55	199	V
			5.632867	-48.97	Pk	35.00	-35.01	11.80	0.00	-37.18	-27	-10.18	55	199	V
			5.850000	-50.88	Pk	35.00	-33.85	11.80	0.00	-37.93	27	-64.93	353	135	H
			5.950150	-49.75	Pk	35.20	-33.69	11.80	0.00	-36.44	-27	-9.44	353	135	H
EHT20 26T - RU8	5825	6	5.850000	-51.28	Pk	35.00	-33.85	11.80	0.00	-38.33	27	-65.33	7	124	V
			5.997925	-49.58	Pk	35.20	-33.67	11.80	0.00	-36.25	-27	-9.25	7	124	V
			5.850000	-43.84	Pk	35.10	-34.85	11.80	0.00	-31.79	27	-58.79	11	270	H
			5.958900	-48.60	Pk	35.30	-34.81	11.80	0.00	-36.31	-27	-9.31	11	270	H
			5.850000	-46.71	Pk	35.10	-34.85	11.80	0.00	-34.66	27	-61.66	37	201	V
		5	5.959440	-48.93	Pk	35.30	-34.81	11.80	0.00	-36.64	-27	-9.64	37	201	V
			5.725000	-38.68	Pk	34.50	-34.41	11.80	0.00	-26.79	27	-53.79	321	140	H
			5.647967	-50.06	Pk	34.60	-34.52	11.80	0.00	-38.18	-27	-11.18	321	140	H
			5.725000	-36.21	Pk	34.50	-34.41	11.80	0.00	-24.32	27	-51.32	304	167	V
			5.641050	-49.45	Pk	34.50	-34.53	11.80	0.00	-37.68	-27	-10.68	304	167	V
EHT80 484+242T - RU93	5775 (Lower)	6	5.725000	-32.12	Pk	34.80	-36.54	11.80	0.00	-22.06	27	-49.06	118	112	H
			5.644384	-46.23	Pk	34.60	-36.61	11.80	0.00	-36.44	-27	-9.44	118	112	H
			5.725000	-33.91	Pk	34.80	-36.54	11.80	0.00	-23.85	27	-50.85	182	180	V
			5.645500	-48.07	Pk	34.60	-36.62	11.80	0.00	-38.29	-27	-11.29	182	180	V
			5.850000	-36.79	Pk	34.90	-37.73	11.80	0.00	-27.82	27	-54.82	313	172	H
		5	5.976575	-47.47	Pk	35.20	-37.29	11.80	0.00	-37.76	-27	-10.76	313	172	H
			5.850000	-39.22	Pk	34.90	-30.25	11.80	0.00	-22.77	27	-49.77	316	155	V
			5.977825	-47.41	Pk	35.20	-37.70	11.80	0.00	-38.11	-27	-11.11	316	155	V
			5.850000	-33.33	Pk	34.90	-37.73	11.80	0.00	-24.36	27	-51.36	281	101	H
			5.991100	-47.37	Pk	35.20	-37.14	11.80	0.00	-37.51	-27	-10.51	281	101	H
EHT80 484+242T - RU90	5775 (Upper)	5	5.850000	-39.75	Pk	34.90	-30.78	11.80	0.00	-23.83	27	-50.83	322	187	V
			5.945950	-46.78	Pk	35.10	-37.25	11.80	0.00	-37.13	-27	-10.13	322	187	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.68. 802.11be MIMO SU MODE IN UNII-3 BAND - BANDEDGE

UNII-3 (MIMO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	ACF (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	Conversi on Factor (dB)	DCCF (dB)	Correct Reading EIRP (dBm)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity		
EHT20 SU Mode	5745	6+5	5.725000	-24.62	Pk	34.80	-36.54	11.80	0.00	-14.56	27	-41.56	284	138	H		
			5.636017	-47.71	Pk	34.60	-36.62	11.80	0.00	-37.93	-27	-10.93	284	138	H		
			5.725000	-25.52	Pk	34.80	-36.54	11.80	0.00	-15.46	27	-42.46	343	135	V		
			5.645284	-48.55	Pk	34.60	-36.61	11.80	0.00	-38.76	-27	-11.76	343	135	V		
			5.850000	-28.03	Pk	35.00	-36.46	11.80	0.00	-17.69	27	-44.69	325	337	H		
	5825		5.986725	-47.45	Pk	35.30	-36.21	11.80	0.00	-36.56	-27	-9.56	325	337	H		
			5.850000	-35.24	Pk	35.00	-36.46	11.80	0.00	-24.90	27	-51.9	281	357	V		
			5.981925	-48.16	Pk	35.30	-36.18	11.80	0.00	-37.24	-27	-10.24	281	357	V		
			EHT40 SU Mode	5755	5.725000	-17.03	Pk	34.80	-36.54	11.80	0.00	-6.97	27	-33.97	328	114	H
					5.648150	-42.44	Pk	34.60	-36.61	11.80	0.00	-32.65	-27	-5.65	328	114	H
5.725000	-19.36	Pk			34.80	-36.54	11.80	0.00	-9.30	27	-36.3	358	158	V			
5.650367	-45.88	Pk			34.60	-36.63	11.80	0.00	-36.11	-26.73	-9.38	358	158	V			
5.850000	-35.67	Pk			35.00	-36.46	11.80	0.00	-25.33	27	-52.33	321	211	H			
5795	5.961525	-47.23		Pk	35.20	-36.14	11.80	0.00	-36.37	-27	-9.37	321	211	H			
	5.850000	-41.65		Pk	35.00	-36.46	11.80	0.00	-31.31	27	-58.31	358	108	V			
	EHT80 SU Mode	5775 (Lower)		5.955275	-47.21	Pk	35.20	-36.16	11.80	0.00	-36.37	-27	-9.37	358	108	V	
				5.725000	-28.34	Pk	34.60	-30.20	11.80	0.00	-12.14	27	-39.14	29	298	H	
				5.650128	-47.95	Pk	34.50	-30.30	11.80	0.00	-31.95	-26.91	-5.04	29	298	H	
5.725000			-36.87	Pk	34.60	-30.20	11.80	0.00	-20.67	27	-47.67	325	397	V			
5.642664			-53.50	Pk	34.50	-30.30	11.80	0.00	-37.50	-27	-10.5	325	397	V			
5775 (Upper)		5.850000	-31.94	Pk	35.00	-30.00	11.80	0.00	-15.14	27	-42.14	333	357	H			
		5.926109	-51.17	Pk	35.40	-29.90	11.80	0.00	-33.87	-27	-6.87	333	357	H			
		5.850000	-38.91	Pk	35.00	-30.00	11.80	0.00	-22.11	27	-49.11	331	393	V			
		5.938120	-53.59	Pk	35.30	-29.90	11.80	0.00	-36.39	-27	-9.39	331	393	V			

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

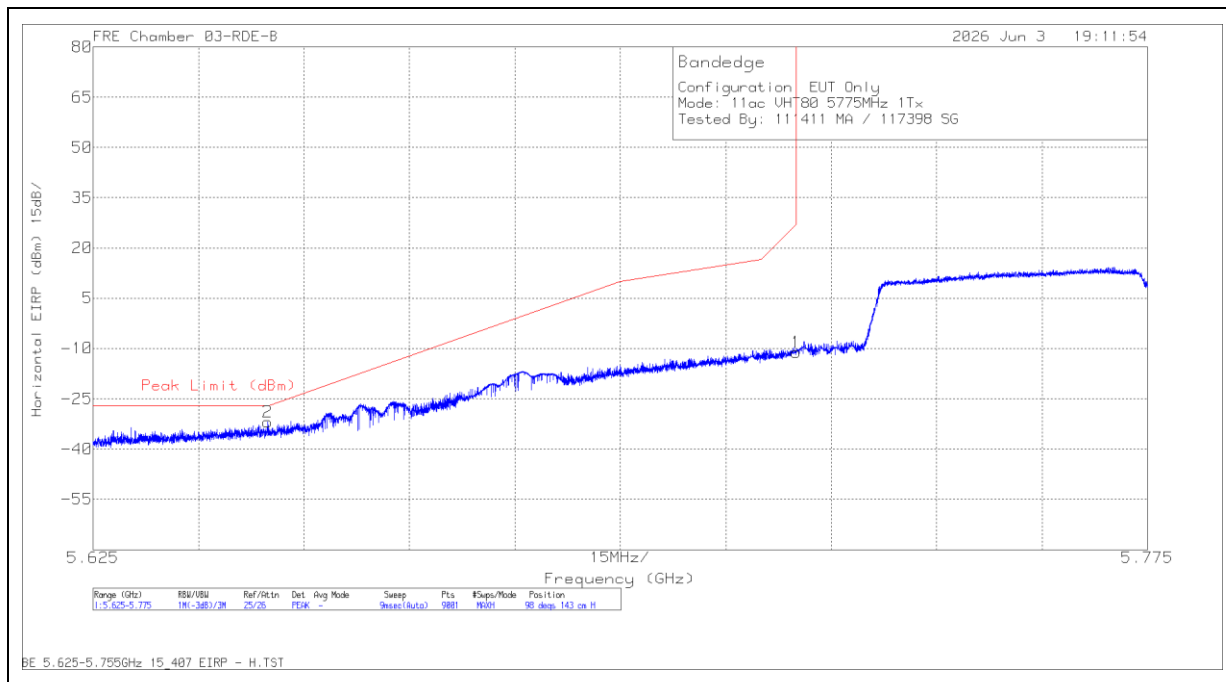
1.1.69. 802.11be MIMO PARTIAL RU MODE IN UNII-3 BAND - BANDEDGE

UNII-3 (MIMO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	ACF (dB/m)	Amp/Cbl/ Filt/Pad (dB)	Conversion Factor (dB)	DCCF (dB)	Correct Reading EIRP (dBm)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 26T - RU0	5745	6+5	5.725000	-34.24	Pk	35.10	-35.06	11.80	0.00	-22.40	27	-49.4	332	224	H
			5.641050	-47.85	Pk	35.00	-35.04	11.80	0.00	-36.09	-27	-9.09	332	224	H
			5.725000	-38.45	Pk	35.10	-35.06	11.80	0.00	-26.61	27	-53.61	35	159	V
			5.628017	-48.92	Pk	35.00	-34.96	11.80	0.00	-37.08	-27	-10.08	35	159	V
EHT20 26T - RU8	5825	6+5	5.850000	-46.72	Pk	35.10	-34.85	11.80	0.00	-34.67	27	-61.67	27	393	H
			5.938830	-48.85	Pk	35.30	-34.69	11.80	0.00	-36.44	-27	-9.44	27	393	H
			5.850000	-46.59	Pk	35.10	-34.85	11.80	0.00	-34.54	27	-61.54	54	233	V
			5.934000	-49.22	Pk	35.30	-34.74	11.80	0.00	-36.86	-27	-9.86	54	233	V
EHT80 484+242T - RU93	5775 (Lower)	6+5	5.725000	-26.42	Pk	34.90	-36.82	11.80	0.00	-16.54	27	-43.54	32	187	H
			5.649017	-45.98	Pk	34.80	-36.88	11.80	0.00	-36.26	-27	-9.26	32	187	H
			5.725000	-26.46	Pk	34.90	-36.82	11.80	0.00	-16.58	27	-43.58	309	146	V
			5.633100	-47.10	Pk	34.80	-36.90	11.80	0.00	-37.40	-27	-10.4	309	146	V
EHT80 484+242T - RU90	5775 (Upper)	6+5	5.850000	-34.67	Pk	35.30	-36.69	11.80	0.00	-24.26	27	-51.26	28	178	H
			5.927300	-47.63	Pk	35.60	-36.68	11.80	0.00	-36.91	-27	-9.91	28	178	H
			5.850000	-32.82	Pk	35.30	-36.69	11.80	0.00	-22.41	27	-49.41	311	151	V
			5.930800	-47.58	Pk	35.60	-36.72	11.80	0.00	-36.90	-27	-9.9	311	151	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

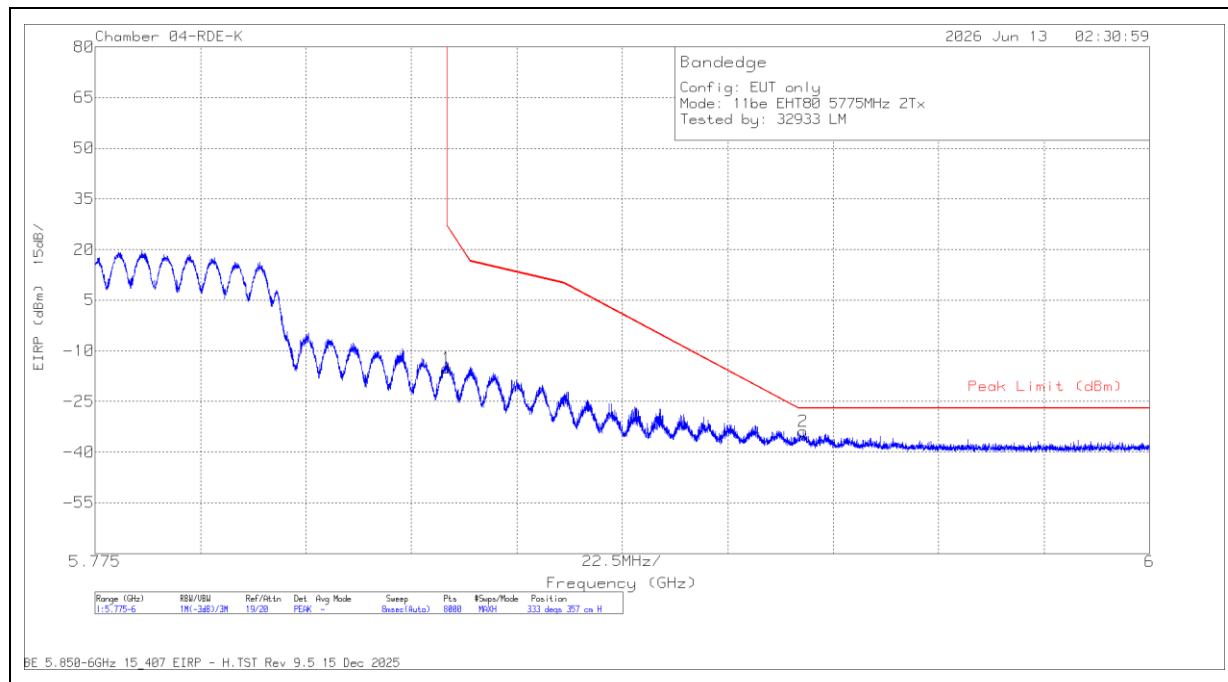
WORST-CASE BANDEDGE (LOW CHANNEL)**802.11ac VHT80 / 5775 MHz / SISO 1TX****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Amp/Cbl/Filtr/Pad (dB)	Correct Reading EIRP (dBm)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)
1	5.725000	-19.00	Pk	34.60	-38.47	11.80	0.00	-11.07	27	-38.07	98	143
2	5.649851	-39.65	Pk	34.50	-38.59	11.80	0.00	-31.94	-27	-4.94	98	143

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

WORST-CASE BANDEDGE (HIGH CHANNEL)**802.11be EHT80 / 5775 MHz / CDD 2TX / SU****HORIZONTAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Amp/Cbl/Filtr/Pad (dB)	Correct Reading (dBm)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)
1	5.850000	-31.94	Pk	35.0	-30.0	11.80	0.00	-15.14	27	-42.14	333	357
2	5.926109	-51.17	Pk	35.4	-29.9	11.80	0.00	-33.87	-27	-6.87	333	357

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.70. 802.11n/ac MIMO MODE IN UNII-3 BAND – SPURIOUS EMISSIONS

20MHz

UNII-3 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
HT20	5745	6+5	* 3.263775	55.90	PK-U	32.80	0.00	-45.20	43.50	-	-	74	-30.5	360	199	H
			* 11.751953	54.68	PK-U	38.70	0.00	-42.00	51.38	-	-	74	-22.62	360	101	H
			* 11.755766	42.51	ADR	38.70	0.00	-41.92	39.29	54	-14.71	-	-	360	101	H
			* 11.720855	53.47	PK-U	38.70	0.00	-42.01	50.16	-	-	74	-23.84	360	200	V
			* 11.752197	42.04	ADR	38.70	0.00	-41.98	38.76	54	-15.24	-	-	360	200	V
			1.967521	58.05	PK-U	31.30	0.00	-46.25	43.10	-	-	68.2	-25.1	360	101	H
			1.979658	58.34	PK-U	31.40	0.00	-46.57	43.17	-	-	68.2	-25.03	360	199	V
			3.24782	55.81	PK-U	32.90	0.00	-45.30	43.41	-	-	68.2	-24.79	360	199	V
			* 10.846651	57.27	PK-U	37.70	0.00	-45.03	49.94	-	-	74	-24.06	287	100	H
			* 10.869014	45.20	ADR	37.80	0.00	-45.42	37.58	54	-16.42	-	-	287	100	H
	5785		* 10.869901	56.83	PK-U	37.80	0.00	-45.38	49.25	-	-	74	-24.75	287	200	V
			* 10.852398	45.08	ADR	37.80	0.00	-45.07	37.81	54	-16.19	-	-	287	200	V
			7.95409	55.66	PK-U	35.90	0.00	-45.60	45.96	-	-	68.2	-22.24	287	201	V
			7.968686	55.70	PK-U	35.90	0.00	-45.63	45.97	-	-	68.2	-22.23	287	100	H
			14.566713	56.82	PK-U	39.50	0.00	-43.71	52.61	-	-	68.2	-15.59	287	200	V
			14.581522	56.81	PK-U	39.50	0.00	-43.80	52.51	-	-	68.2	-15.69	287	100	H
			* 12.393302	53.52	PK-U	38.80	0.00	-40.70	51.62	-	-	74	-22.38	360	101	H
			* 12.406227	52.96	PK-U	38.80	0.00	-40.85	50.91	-	-	74	-23.09	360	101	V
			* 12.410703	41.60	ADR	38.80	0.00	-41.00	39.40	54	-14.6	-	-	360	101	V
			* 12.4214	41.72	ADR	38.80	0.00	-40.84	39.68	54	-14.32	-	-	360	101	H
	5825		* 2.739164	58.34	PK-U	32.40	0.00	-47.22	43.52	-	-	74	-30.48	360	200	V
			* 2.744915	58.29	PK-U	32.40	0.00	-47.39	43.30	-	-	74	-30.7	360	200	H
			* 2.745051	46.75	ADR	32.40	0.00	-47.40	31.75	54	-22.25	-	-	360	200	V
			* 2.746655	46.71	ADR	32.40	0.00	-47.33	31.78	54	-22.22	-	-	360	200	H
			* 8.311017	54.75	PK-U	36.00	0.00	-42.90	47.85	-	-	74	-26.15	360	101	V
			* 8.315165	54.38	PK-U	36.00	0.00	-43.00	47.38	-	-	74	-26.62	360	101	H
			* 8.319235	43.03	ADR	36.00	0.00	-42.80	36.23	54	-17.77	-	-	360	101	V
			* 8.32165	42.87	ADR	36.00	0.00	-42.74	36.13	54	-17.87	-	-	360	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

40MHz

UNII-3 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
HT40	5755	6+5	* 12.011814	41.38	ADR	39.00	0.00	-41.50	38.88	54	-15.12	-	-	360	101	V
			* 12.014361	52.57	PK-U	39.00	0.00	-41.70	49.87	-	-	74	-24.13	360	101	V
			* 12.015494	41.60	ADR	39.00	0.00	-41.65	38.95	54	-15.05	-	-	360	101	H
			* 12.019485	53.22	PK-U	39.00	0.00	-41.65	50.57	-	-	74	-23.43	360	101	H
			* 2.73749	47.01	ADR	32.40	0.00	-47.35	32.06	54	-21.94	-	-	360	101	V
			* 2.743157	58.66	PK-U	32.40	0.00	-47.38	43.68	-	-	74	-30.32	360	101	H
			* 2.748311	46.76	ADR	32.40	0.00	-47.37	31.79	54	-22.21	-	-	360	101	H
			* 2.74887	58.81	PK-U	32.40	0.00	-47.31	43.90	-	-	74	-30.1	360	101	V
			* 7.649858	42.01	ADR	35.80	0.00	-43.00	34.81	54	-19.19	-	-	360	101	V
			* 7.658187	54.36	PK-U	35.80	0.00	-43.08	47.08	-	-	74	-26.92	360	101	H
			* 7.66633	41.98	ADR	35.80	0.00	-42.97	34.81	54	-19.19	-	-	360	101	H
			* 7.680214	54.57	PK-U	35.80	0.00	-42.88	47.49	-	-	74	-26.51	360	101	V
			2.631019	57.67	PK-U	32.20	0.00	-46.80	43.07	-	-	68.2	-25.13	2	101	V
			2.632833	58.30	PK-U	32.20	0.00	-46.80	43.70	-	-	68.2	-24.5	2	101	H
	7.767206		53.94	PK-U	35.90	0.00	-42.88	46.96	-	-	68.2	-21.24	2	101	V	
	7.775508		53.87	PK-U	35.80	0.00	-42.65	47.02	-	-	68.2	-21.18	2	101	H	
	13.061364		54.60	PK-U	38.80	0.00	-41.80	51.60	-	-	68.2	-16.6	2	101	H	
	13.088421		54.55	PK-U	38.80	0.00	-41.80	51.55	-	-	68.2	-16.65	2	101	V	

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

80MHz

UNII-3 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filtr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
VHT80	5775	6+5	1.910752	59.17	PK-U	31.00	0.00	-46.30	43.87	-	-	68.2	-24.33	360	200	H
			1.91603	59.23	PK-U	31.10	0.00	-46.20	44.13	-	-	68.2	-24.07	360	101	V
			3.10358	56.47	PK-U	33.10	0.00	-45.90	43.67	-	-	68.2	-24.53	360	101	V
			3.134393	56.68	PK-U	33.00	0.00	-45.96	43.72	-	-	68.2	-24.48	360	101	H
			10.104927	55.03	PK-U	37.70	0.00	-42.31	50.42	-	-	68.2	-17.78	360	101	H
			10.105663	55.28	PK-U	37.70	0.00	-42.23	50.75	-	-	68.2	-17.45	360	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.1.71. 802.11be MIMO SU MODE IN UNII-3 BAND – SPURIOUS EMISSIONS

20MHz

UNII-3 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 SU Mode	5745	6+5	* 15.801017	55.35	PK-U	40.40	0.00	-42.50	53.25	-	-	74	-20.75	3	101	H
			* 15.806190	43.75	ADR	40.40	0.00	-42.52	41.63	54	-12.37	-	-	3	101	H
			* 15.816324	55.47	PK-U	40.40	0.00	-42.73	53.14	-	-	74	-20.86	3	200	V
			* 15.816786	43.52	ADR	40.40	0.00	-42.78	41.14	54	-12.86	-	-	3	200	V
			* 3.693417	44.36	ADR	33.20	0.00	-45.40	32.16	54	-21.84	-	-	3	101	H
			* 3.695557	56.25	PK-U	33.20	0.00	-45.30	44.15	-	-	74	-29.85	3	101	H
			* 3.703549	44.30	ADR	33.20	0.00	-45.20	32.30	54	-21.7	-	-	3	101	V
			* 3.724196	55.90	PK-U	33.30	0.00	-45.28	43.92	-	-	74	-30.08	3	101	V
			* 8.322632	42.88	ADR	36.00	0.00	-42.70	36.18	54	-17.82	-	-	3	199	H
			* 8.327333	43.19	ADR	36.00	0.00	-42.80	36.39	54	-17.61	-	-	3	101	V
			* 8.334117	54.47	PK-U	36.00	0.00	-42.49	47.98	-	-	74	-26.02	3	199	H
			* 8.338160	54.77	PK-U	36.00	0.00	-42.40	48.37	-	-	74	-25.63	3	101	V
	* 12.400716		54.04	PK-U	38.80	0.00	-40.80	52.04	-	-	74	-21.96	1	101	V	
	* 12.409890		42.00	ADR	38.80	0.00	-40.99	39.81	54	-14.19	-	-	1	101	V	
	* 12.420517		42.28	ADR	38.80	0.00	-40.80	40.28	54	-13.72	-	-	1	200	H	
	* 12.422263		53.46	PK-U	38.70	0.00	-40.87	51.29	-	-	74	-22.71	1	200	H	
	* 2.792785		47.02	ADR	32.50	0.00	-47.10	32.42	54	-21.58	-	-	1	101	V	
	* 2.795899		46.92	ADR	32.50	0.00	-47.20	32.22	54	-21.78	-	-	1	200	H	
	* 2.798159		58.81	PK-U	32.40	0.00	-47.20	44.01	-	-	74	-29.99	1	200	H	
	* 2.799372		59.14	PK-U	32.40	0.00	-47.20	44.34	-	-	74	-29.66	1	101	V	
	* 8.190270		54.20	PK-U	36.10	0.00	-43.00	47.30	-	-	74	-26.7	1	200	V	
	* 8.202585		42.56	ADR	36.10	0.00	-42.84	35.82	54	-18.18	-	-	1	200	V	
	* 8.204057		42.72	ADR	36.10	0.00	-42.90	35.92	54	-18.08	-	-	1	101	H	
	* 8.212559		54.56	PK-U	36.10	0.00	-42.74	47.92	-	-	74	-26.08	1	101	H	
	* 11.972670		54.81	PK-U	39.00	0.00	-41.60	52.21	-	-	74	-21.79	1	101	H	
	* 11.972964		54.14	PK-U	39.00	0.00	-41.60	51.54	-	-	74	-22.46	1	101	V	
	* 11.985430		42.30	ADR	39.00	0.00	-41.40	39.90	54	-14.1	-	-	1	101	H	
	* 11.996635		42.34	ADR	39.00	0.00	-41.26	40.08	54	-13.92	-	-	1	101	V	
	* 3.860459		56.27	PK-U	33.40	0.00	-45.15	44.52	-	-	74	-29.48	1	199	H	
	* 3.893372		43.82	ADR	33.50	0.00	-45.36	31.96	54	-22.04	-	-	1	199	H	
	* 3.899009		55.19	PK-U	33.40	0.00	-45.40	43.19	-	-	74	-30.81	1	199	V	
	* 3.899709		43.79	ADR	33.40	0.00	-45.33	31.86	54	-22.14	-	-	1	199	V	
	* 8.334588		55.32	PK-U	36.00	0.00	-42.44	48.88	-	-	74	-25.12	1	101	H	
	* 8.348108		55.17	PK-U	36.00	0.00	-42.50	48.67	-	-	74	-25.33	1	101	V	
	* 8.358348		43.09	ADR	36.00	0.00	-42.90	36.19	54	-17.81	-	-	1	101	V	
	* 8.371690		42.85	ADR	36.00	0.00	-43.07	35.78	54	-18.22	-	-	1	101	H	

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

40MHz

UNII-3 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Fltr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT40 SU Mode	5755	6+5	1.968724	58.24	PK-U	31.30	0.00	-46.30	43.24	-	-	68.2	-24.96	360	101	H
			1.969711	58.35	PK-U	31.30	0.00	-46.44	43.21	-	-	68.2	-24.99	360	200	V
			3.081215	56.81	PK-U	33.20	0.00	-46.20	43.81	-	-	68.2	-24.39	360	101	V
			3.098323	56.86	PK-U	33.10	0.00	-46.07	43.89	-	-	68.2	-24.31	360	200	H
			10.006032	54.45	PK-U	37.60	0.00	-42.80	49.25	-	-	68.2	-18.95	360	200	V
			10.014823	54.09	PK-U	37.60	0.00	-42.62	49.07	-	-	68.2	-19.13	360	101	H
	5795		1.966550	58.13	PK-U	31.30	0.00	-46.20	43.23	-	-	68.2	-24.97	360	199	V
			1.974743	58.71	PK-U	31.40	0.00	-46.47	43.64	-	-	68.2	-24.56	360	199	H
			3.107175	56.69	PK-U	33.10	0.00	-45.98	43.81	-	-	68.2	-24.39	360	101	V
			3.137139	56.46	PK-U	33.00	0.00	-45.99	43.47	-	-	68.2	-24.73	360	199	H
			10.146905	54.50	PK-U	37.70	0.00	-42.69	49.51	-	-	68.2	-18.69	360	200	V
			10.176777	54.11	PK-U	37.80	0.00	-41.38	50.53	-	-	68.2	-17.67	360	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

80MHz

UNII-3 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filtr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT80 SU Mode	5775	6+5	* 15.740895	43.68	ADR	40.40	0.00	-41.82	42.26	54	-11.74	-	-	0	200	H
			* 15.746370	43.61	ADR	40.40	0.00	-42.00	42.01	54	-11.99	-	-	0	200	V
			* 15.748494	55.21	PK-U	40.40	0.00	-42.10	53.51	-	-	74	-20.49	0	200	V
			* 15.757597	55.55	PK-U	40.40	0.00	-42.40	53.55	-	-	74	-20.45	0	200	H
			* 2.688953	46.39	ADR	32.20	0.00	-46.80	31.79	54	-22.21	-	-	0	199	H
			* 2.689873	58.20	PK-U	32.20	0.00	-46.80	43.60	-	-	74	-30.4	0	199	H
			* 2.727673	57.98	PK-U	32.30	0.00	-47.23	43.05	-	-	74	-30.95	0	199	V
			* 2.733227	46.32	ADR	32.40	0.00	-47.28	31.44	54	-22.56	-	-	0	199	V
			* 8.369134	42.81	ADR	36.00	0.00	-43.00	35.81	54	-18.19	-	-	0	200	V
			* 8.371174	55.19	PK-U	36.00	0.00	-43.02	48.17	-	-	74	-25.83	0	200	V
			* 8.372376	54.27	PK-U	36.00	0.00	-43.10	47.17	-	-	74	-26.83	0	101	H
			* 8.375527	42.67	ADR	36.00	0.00	-43.10	35.57	54	-18.43	-	-	0	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

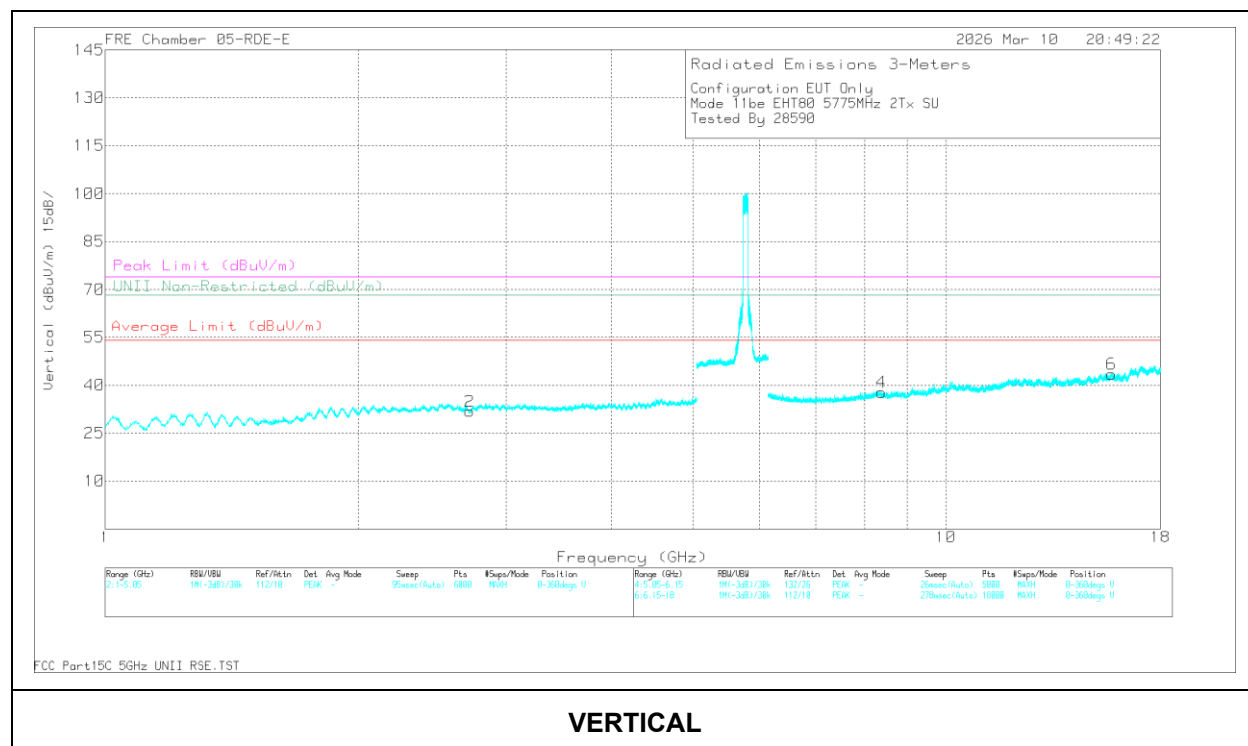
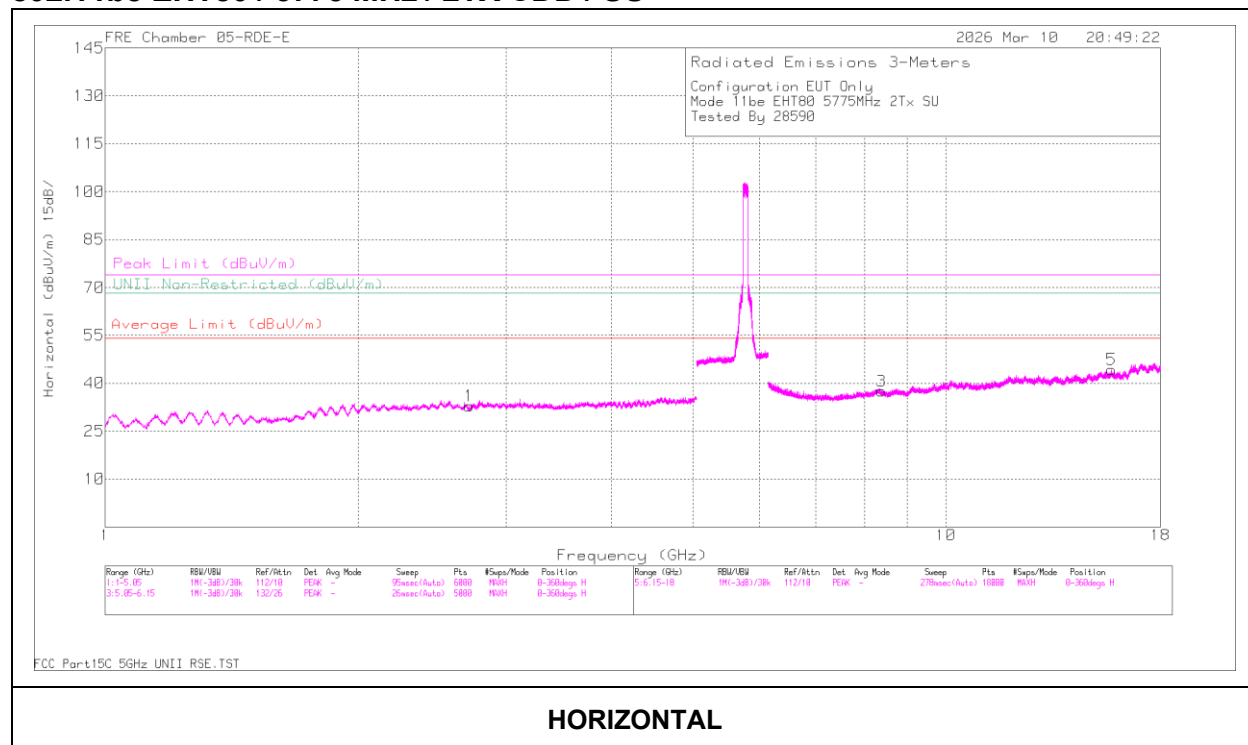
1.1.72. 802.11be MIMO PARTIAL RU MODE IN UNII-3 BAND – SPURIOUS EMISSIONS

UNII-3 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filt/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 26T - RU0	5745	6+5	* 3.956143	44.94	ADR	33.50	0.00	-47.10	31.34	54	-22.66	-	-	360	101	H
			* 3.970069	44.98	ADR	33.50	0.00	-46.84	31.64	54	-22.36	-	-	360	101	V
			* 3.973875	56.56	PK-U	33.50	0.00	-46.85	43.21	-	-	74	-30.79	360	101	V
			* 3.983469	56.55	PK-U	33.50	0.00	-47.17	42.88	-	-	74	-31.12	360	101	H
			16.901515	48.48	PK-U	42.00	0.00	-40.27	50.21	-	-	68.2	-17.99	360	101	H
			16.915572	48.37	PK-U	42.00	0.00	-39.93	50.44	-	-	68.2	-17.76	360	101	V
			9.886567	55.52	PK-U	37.10	0.00	-45.55	47.07	-	-	68.2	-21.13	360	200	V
			9.909061	55.81	PK-U	37.10	0.00	-45.41	47.50	-	-	68.2	-20.7	360	101	H
			* 3.865969	57.24	PK-U	33.40	0.00	-47.22	43.42	-	-	74	-30.58	360	101	V
EHT20 26T - RU4	5785	6+5	* 3.867623	45.43	ADR	33.40	0.00	-47.21	31.62	54	-22.38	-	-	360	101	V
			* 3.869355	45.09	ADR	33.40	0.00	-47.23	31.26	54	-22.74	-	-	360	101	H
			* 3.869615	57.08	PK-U	33.40	0.00	-47.23	43.25	-	-	74	-30.75	360	101	H
			16.843019	48.80	PK-U	42.10	0.00	-40.11	50.79	-	-	68.2	-17.41	360	101	V
			16.875616	48.79	PK-U	42.00	0.00	-40.08	50.71	-	-	68.2	-17.49	360	101	H
			9.870787	56.07	PK-U	37.10	0.00	-45.15	48.02	-	-	68.2	-20.18	360	101	V
			9.894391	56.35	PK-U	37.10	0.00	-45.34	48.11	-	-	68.2	-20.09	360	101	H
			1.969129	58.18	PK-U	31.30	0.00	-46.33	43.15	-	-	68.2	-25.05	360	200	H
			1.976925	58.25	PK-U	31.40	0.00	-46.49	43.16	-	-	68.2	-25.04	360	101	V
EHT20 26T - RU8	5825	6+5	3.085308	56.54	PK-U	33.20	0.00	-46.20	43.54	-	-	68.2	-24.66	360	200	H
			3.111954	57.13	PK-U	33.10	0.00	-45.90	44.33	-	-	68.2	-23.87	360	101	V
			10.078853	54.76	PK-U	37.70	0.00	-42.70	49.76	-	-	68.2	-18.44	360	200	H
			10.101017	54.33	PK-U	37.70	0.00	-42.60	49.43	-	-	68.2	-18.77	360	101	V
			* 1.339620	62.14	PK-U	29.80	0.00	-50.02	41.92	-	-	74	-32.08	360	100	V
			* 1.342754	50.44	ADR	29.80	0.00	-50.04	30.20	54	-23.8	-	-	360	100	V
EHT80 484+242T - RU91	5775	6+5	* 1.342768	62.12	PK-U	29.80	0.00	-50.04	41.88	-	-	74	-32.12	360	100	H
			* 1.343421	50.60	ADR	29.80	0.00	-50.04	30.36	54	-23.64	-	-	360	100	H
			* 11.861243	43.49	ADR	39.10	0.00	-42.74	39.85	54	-14.15	-	-	360	100	H
			* 11.867492	55.00	PK-U	39.10	0.00	-42.66	51.44	-	-	74	-22.56	360	100	H
			* 4.342543	47.30	ADR	34.30	0.00	-48.04	33.56	54	-20.44	-	-	360	100	H
			* 4.346109	59.18	PK-U	34.40	0.00	-48.09	45.49	-	-	74	-28.51	360	100	H
			15.152726	55.77	PK-U	40.80	0.00	-43.32	53.25	-	-	68.2	-14.95	360	100	V
			4.448580	58.07	PK-U	34.80	0.00	-47.68	45.19	-	-	68.2	-23.01	360	100	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

WORST-CASE HARMONICS AND SPURIOUS EMISSIONS**802.11be EHT80 / 5775 MHz / 2TX CDD / SU**

Radiated Emissions

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	ACF (dB/m)	DCCF (dB)	Amp/Cbl/ Filt/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
5	* 15.740895	43.68	ADR	40.40	0.00	-41.82	42.26	54	-11.74	-	-	0	200	H
6	* 15.746370	43.61	ADR	40.40	0.00	-42.00	42.01	54	-11.99	-	-	0	200	V
6	* 15.748494	55.21	PK-U	40.40	0.00	-42.10	53.51	-	-	74	-20.49	0	200	V
5	* 15.757597	55.55	PK-U	40.40	0.00	-42.40	53.55	-	-	74	-20.45	0	200	H
1	* 2.688953	46.39	ADR	32.20	0.00	-46.80	31.79	54	-22.21	-	-	0	199	H
1	* 2.689873	58.20	PK-U	32.20	0.00	-46.80	43.60	-	-	74	-30.4	0	199	H
2	* 2.727673	57.98	PK-U	32.30	0.00	-47.23	43.05	-	-	74	-30.95	0	199	V
2	* 2.733227	46.32	ADR	32.40	0.00	-47.28	31.44	54	-22.56	-	-	0	199	V
4	* 8.369134	42.81	ADR	36.00	0.00	-43.00	35.81	54	-18.19	-	-	0	200	V
4	* 8.371174	55.19	PK-U	36.00	0.00	-43.02	48.17	-	-	74	-25.83	0	200	V

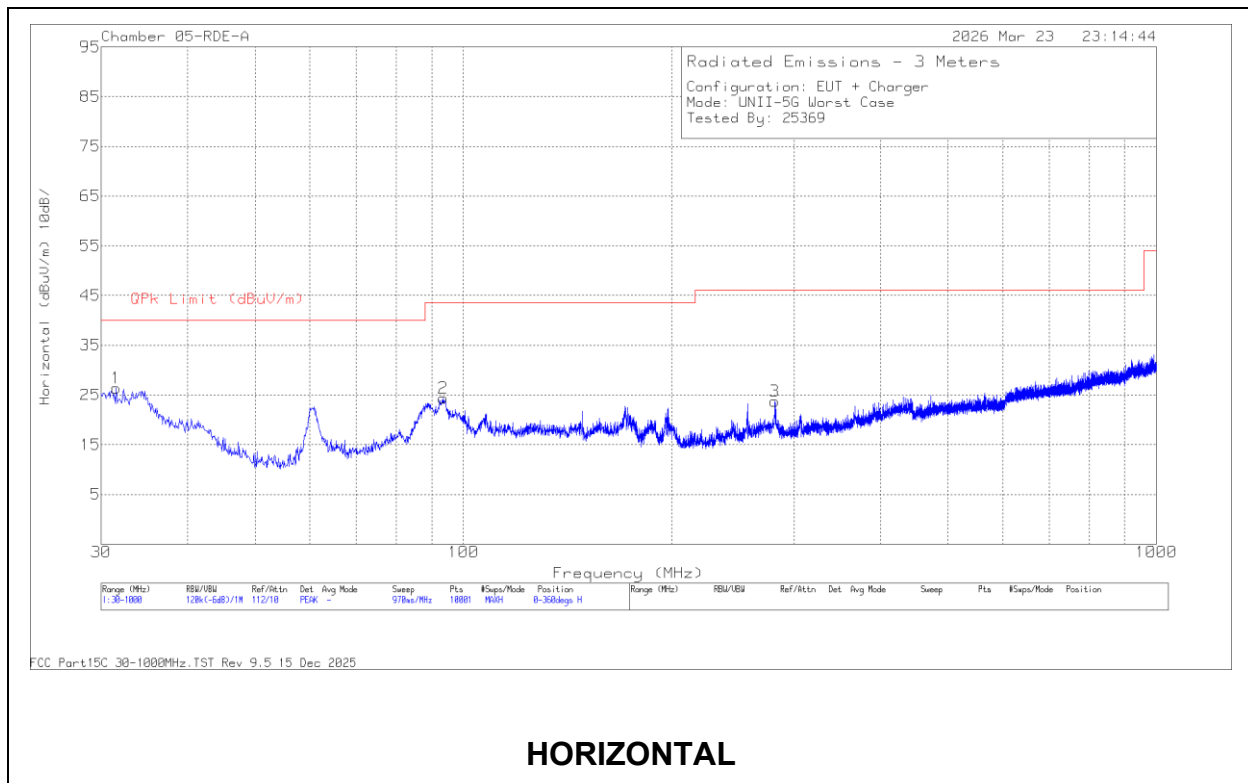
* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

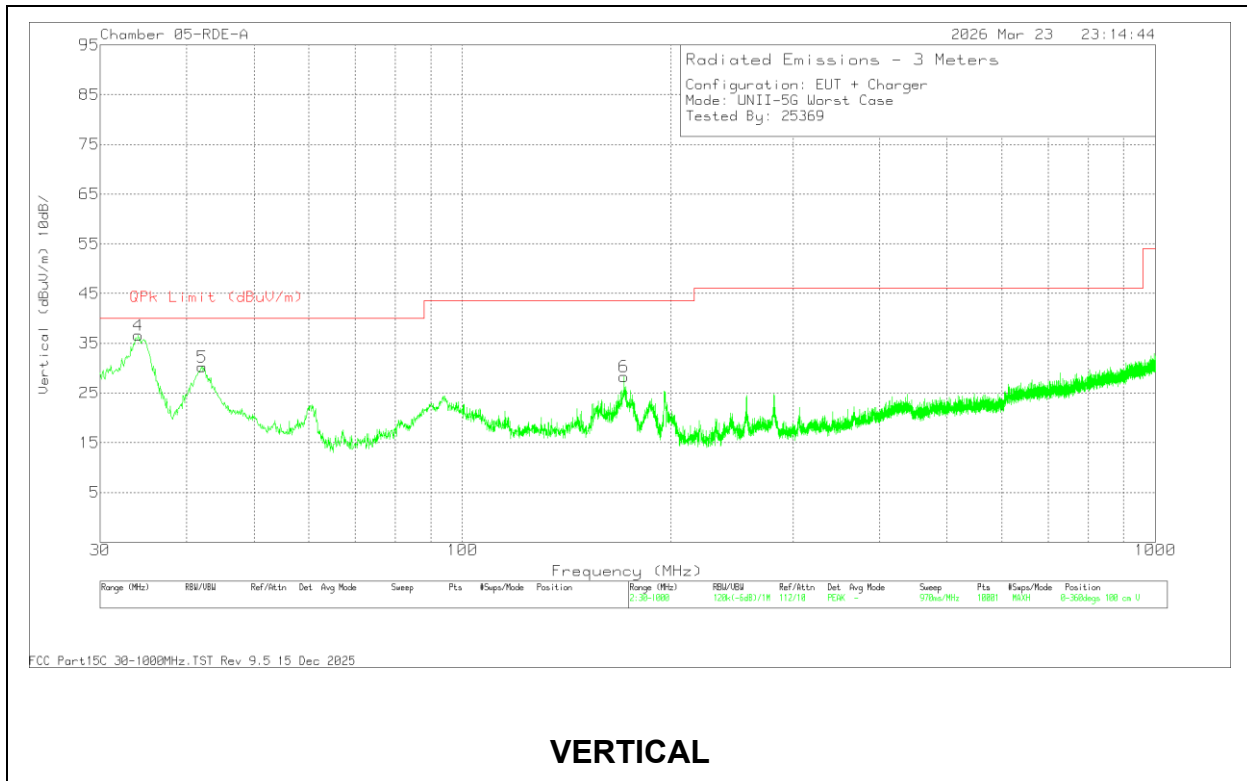
PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.2. WORST CASE BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION)





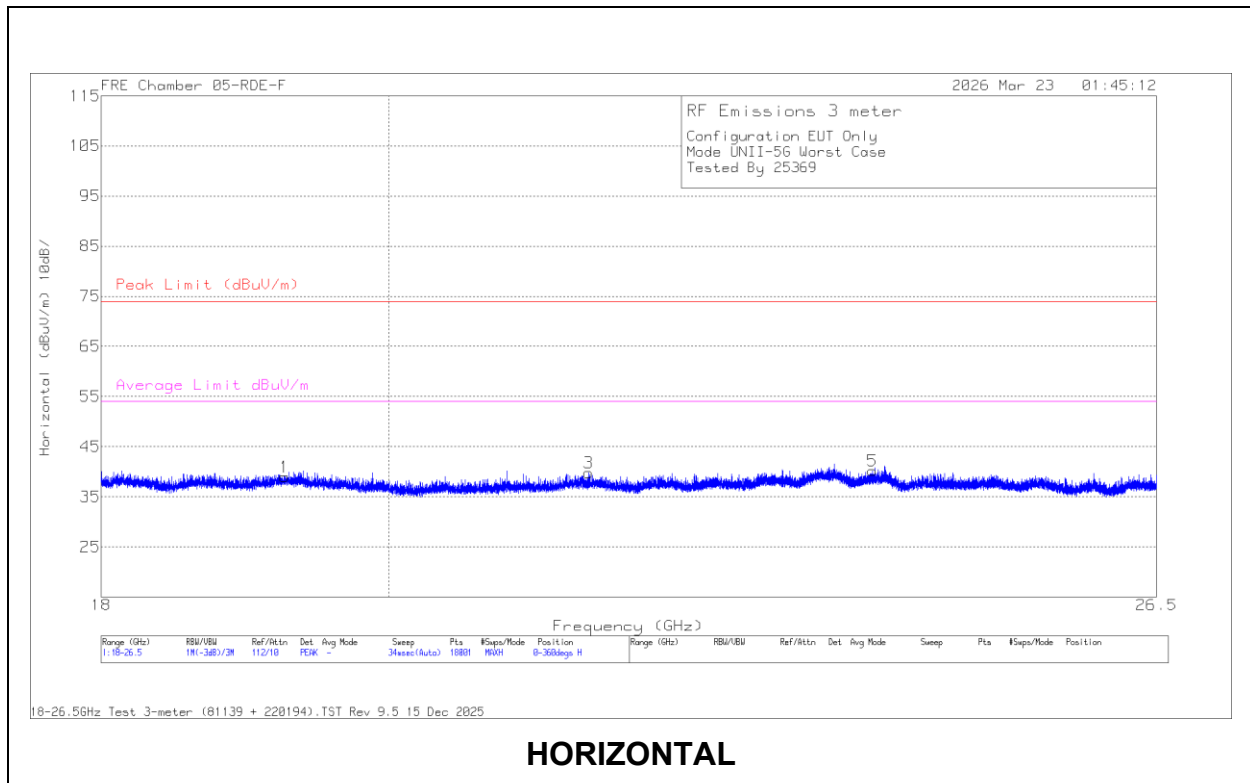
Below 1GHz Data

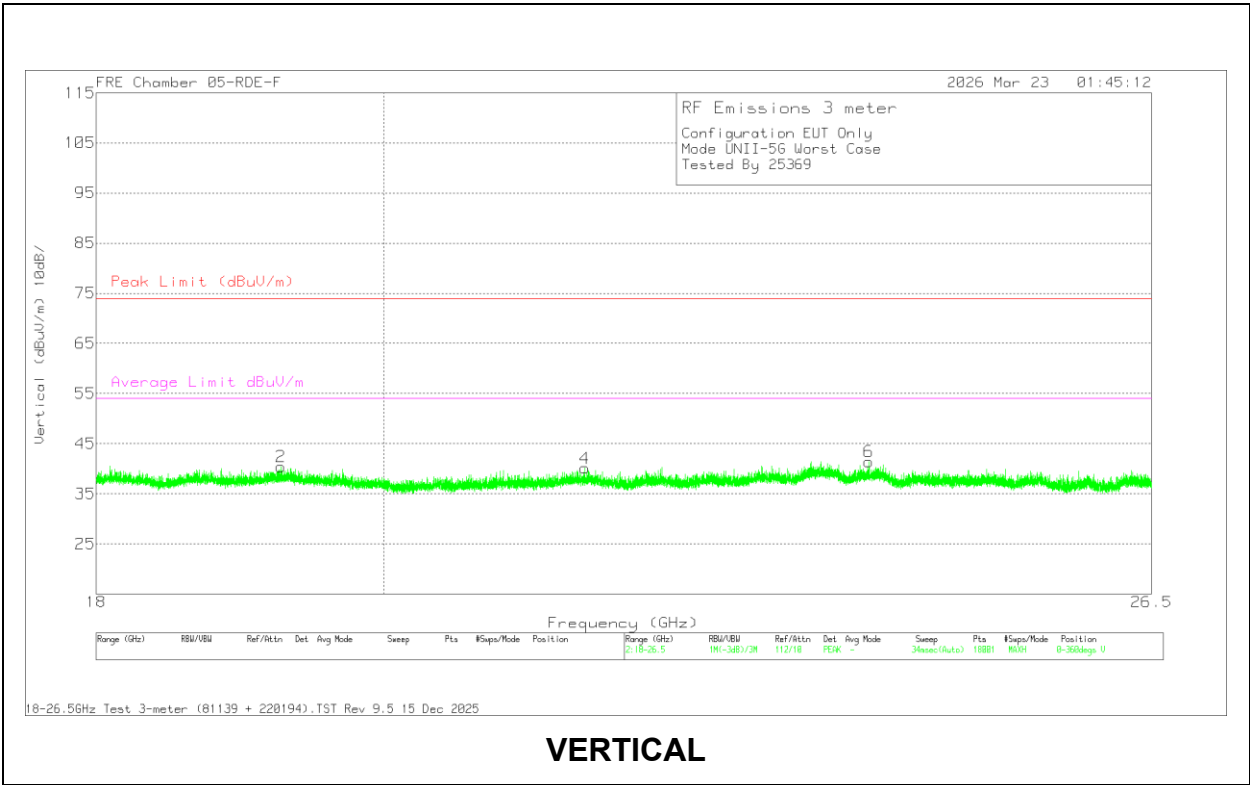
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	204045 ACF (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	* 281.604	29.41	Qp	19.20	-30.70	17.91	46.02	-28.11	12	126	H
6	* 171.388	39.18	Qp	17.70	-31.40	25.48	43.52	-18.04	109	114	V
1	31.42940	24.59	Qp	25.80	-32.30	18.09	40	-21.91	57	198	H
4	34.03010	41.48	Qp	24.10	-32.30	33.28	40	-6.72	249	104	V
5	41.99830	41.43	Qp	18.20	-32.10	27.53	40	-12.47	246	103	V
2	93.40260	39.54	Qp	14.40	-31.80	22.14	43.52	-21.38	110	200	H

Qp - Quasi-Peak detector

1.3. WORST CASE 18-26 GHz

SPURIOUS EMISSIONS 18-26 GHz (WORST-CASE CONFIGURATION)





18 – 26GHz Data

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	81139 ACF (dB/m)	CBL/AMP (dB)	Cables (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Avg Limit dBuV/m	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 19.246991	57.75	PK-U	32.60	-62.30	13.30	0.00	41.35	74	-32.65	-	-	0	200	H
1	* 19.251131	45.84	ADR	32.60	-62.30	13.30	0.00	29.44	-	-	54	-24.56	0	200	H
3	* 21.523530	56.3	PK-U	33.30	-62.50	14.10	0.00	41.20	74	-32.8	-	-	0	200	H
3	* 21.523710	44.03	ADR	33.30	-62.50	14.10	0.00	28.93	-	-	54	-25.07	0	200	H
5	* 23.87839	55.87	PK-U	33.60	-62.90	14.90	0.00	41.47	74	-32.53	-	-	0	101	H
5	* 23.877638	44.29	ADR	33.60	-62.90	14.90	0.00	29.89	-	-	54	-24.11	0	101	H
2	* 19.260544	57.42	PK-U	32.60	-62.30	13.30	0.00	41.02	74	-32.98	-	-	0	101	V
2	* 19.261609	45.78	ADR	32.60	-62.30	13.30	0.00	29.38	-	-	54	-24.62	0	101	V
4	* 21.528301	55.6	PK-U	33.30	-62.40	14.10	0.00	40.60	74	-33.4	-	-	0	200	V
4	* 21.532457	44.19	ADR	33.30	-62.40	14.10	0.00	29.19	-	-	54	-24.81	0	200	V
6	* 23.892542	56.17	PK-U	33.60	-62.90	14.90	0.00	41.77	74	-32.23	-	-	0	200	V
6	* 23.891182	44.32	ADR	33.60	-62.90	14.90	0.00	29.92	-	-	54	-24.08	0	200	V

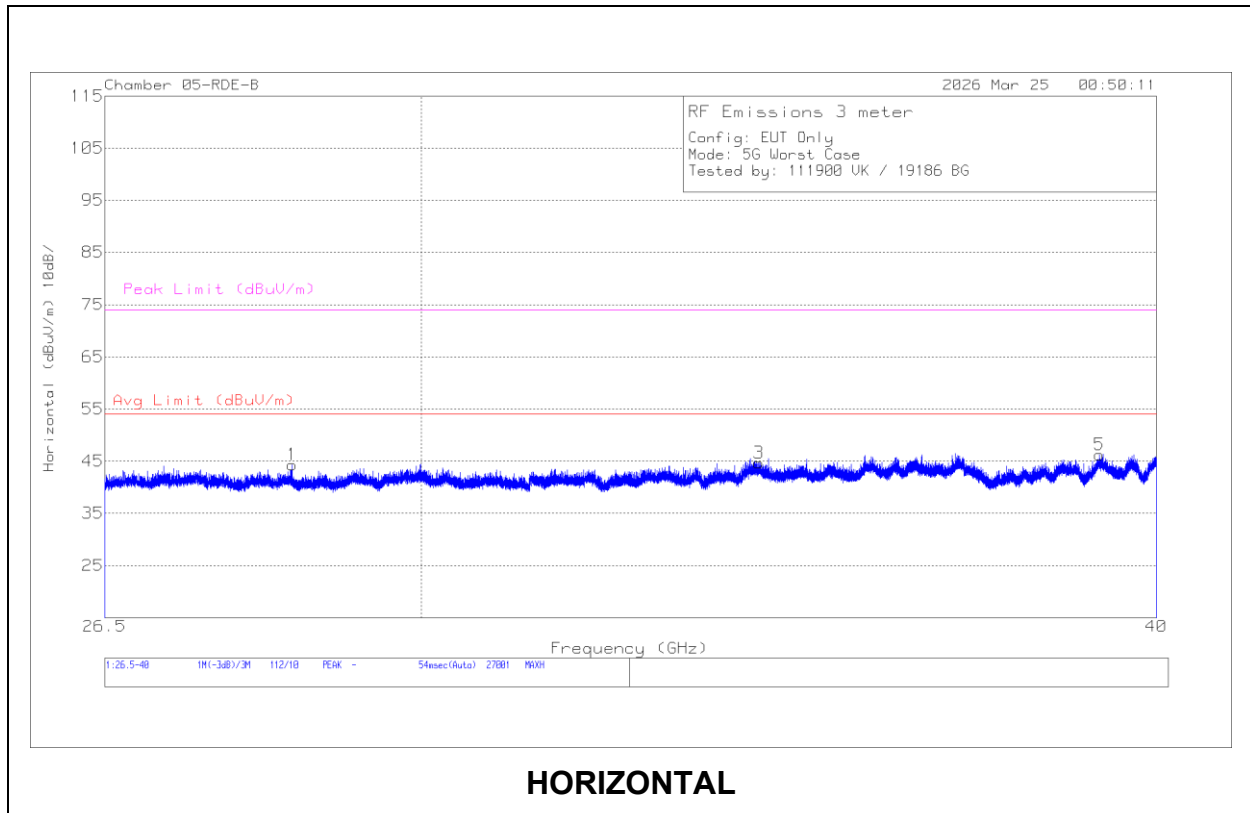
* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

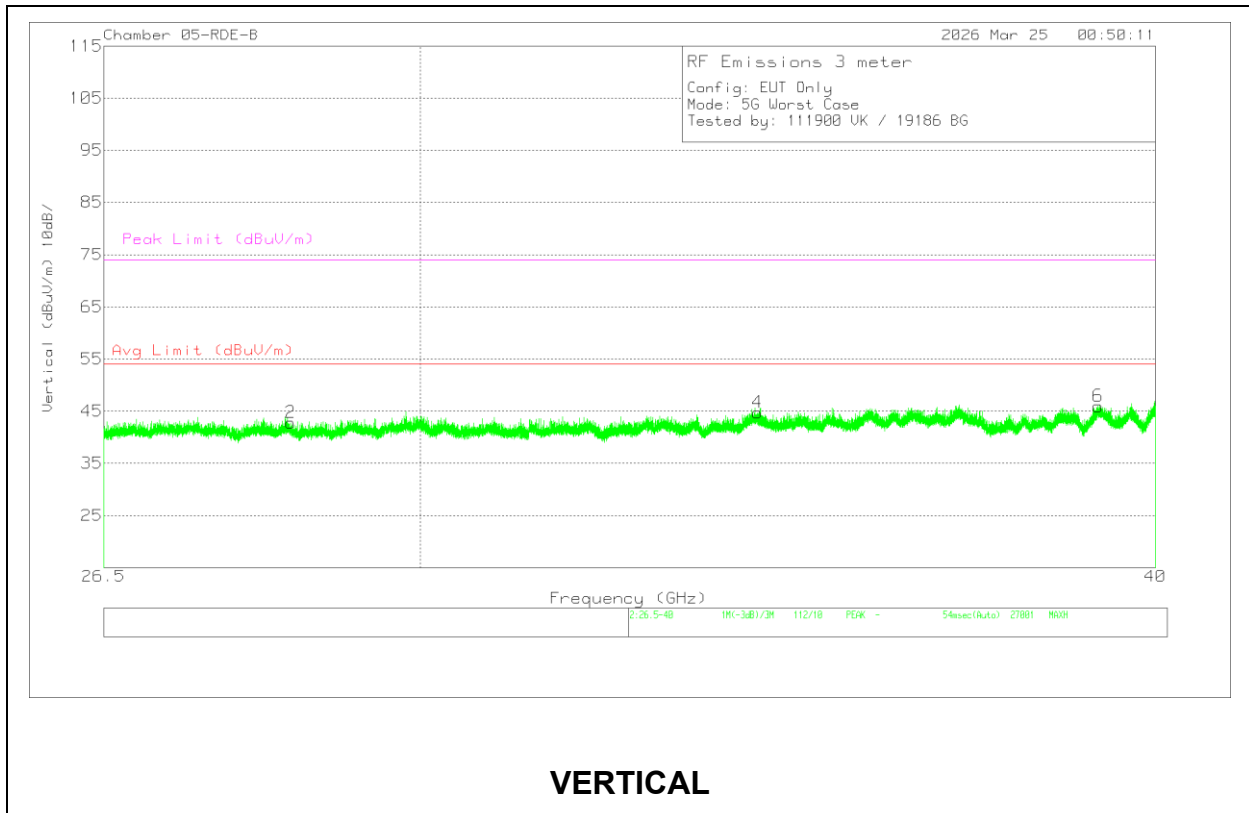
PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.4. WORST CASE 26-40 GHz

SPURIOUS EMISSIONS 26-40 GHz (WORST-CASE CONFIGURATION)





26 – 40GHz Data

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	172366 ACF (dB/m)	CBL/AMP (dB)	Cables (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Avg Limit dBuV/m	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
5	* 39.118531	60.05	PK-U	38.20	-69.90	20.00	0.00	48.35	-	-	74	-25.65	2	101	H
5	* 39.118992	48.25	ADR	38.20	-69.90	20.00	0.00	36.55	54	-17.45	-	-	2	101	H
6	* 39.112386	59.87	PK-U	38.20	-69.90	20.00	0.00	48.17	-	-	74	-25.83	2	101	V
6	* 39.111231	48.23	ADR	38.20	-69.90	20.00	0.00	36.53	54	-17.47	-	-	2	101	V
2	28.51047	64.01	PK-U	36.10	-72.50	17.40	0.00	45.01	-	-	68.2	-23.19	2	101	V
1	28.51750	63.3	PK-U	36.10	-72.60	17.30	0.00	44.10	-	-	68.2	-24.1	2	199	H
4	34.22972	63.82	PK-U	37.20	-72.50	18.80	0.00	47.32	-	-	68.2	-20.88	2	101	V
3	34.23533	63.81	PK-U	37.20	-72.60	18.80	0.00	47.21	-	-	68.2	-20.99	2	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

2. AC POWERLINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 8.8

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.

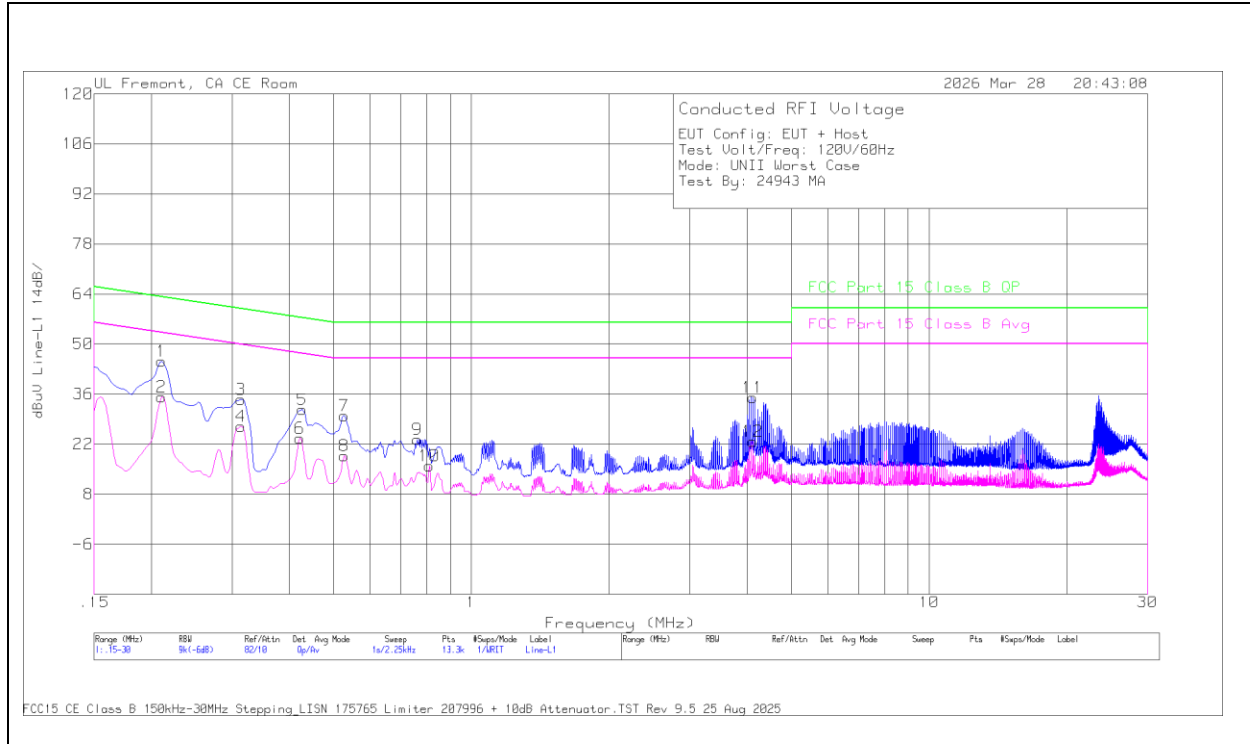
The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both HOT (L1) and NEUTRAL (L2) lines.

RESULTS

2.1. AC POWER LINE WITH LAPTOP

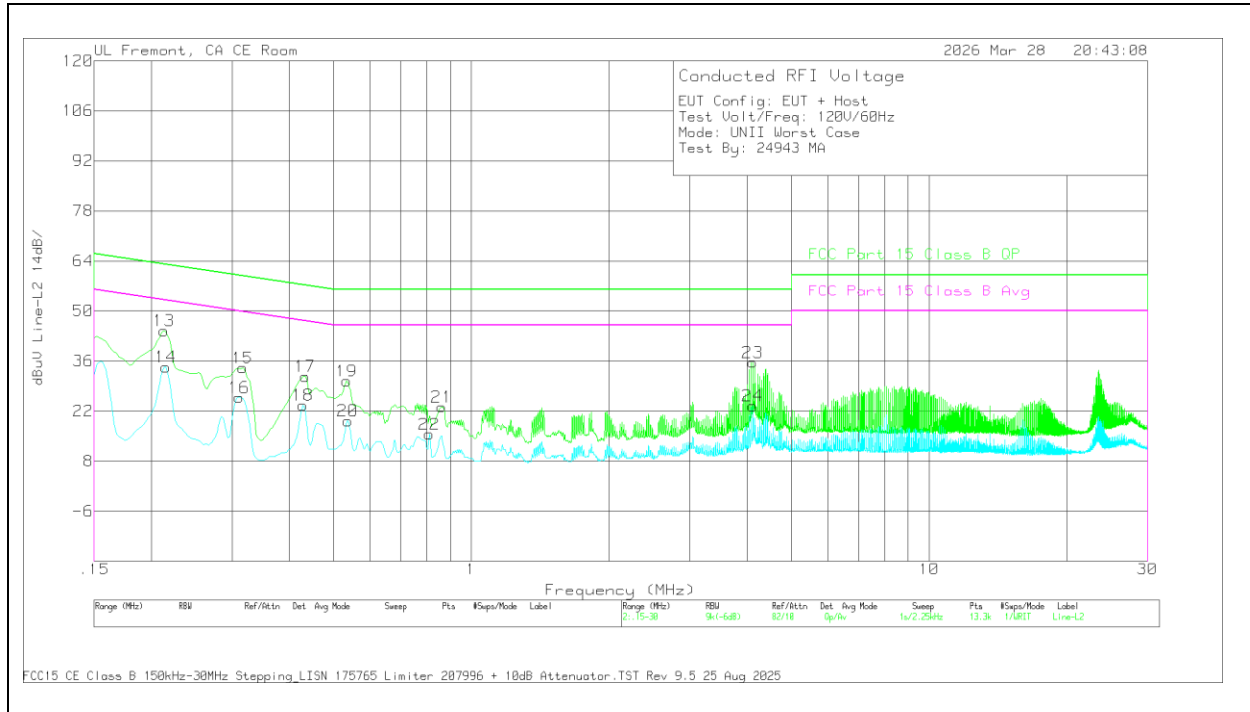
LINE 1 RESULTS



Range 1: Phase L1 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	CBL (dB)	LISN (dB)	10dB Atten (dB)	Corrected Reading (dBuV)	FCC Part 15 Class B Avg (dBuV)	Margin (dB)	FCC Part 15 class B QP (dBuV)	Margin (dB)
2	0.21080	15.84	Av	9.40	0.00	9.90	35.14	53.18	-18.04	-	-
4	0.31430	7.69	Av	9.30	0.00	9.90	26.89	49.86	-22.97	-	-
6	0.42230	4.38	Av	9.30	0.00	9.90	23.58	47.4	-23.82	-	-
8	0.52800	-0.51	Av	9.30	0.00	9.90	18.69	46	-27.31	-	-
10	0.80930	-3.25	Av	9.30	0.00	9.90	15.95	46	-30.05	-	-
12	4.11900	3.42	Av	9.40	0.00	9.90	22.72	46	-23.28	-	-
1	0.21080	25.87	Qp	9.40	0.00	9.90	45.17	-	-	63.18	-18.01
3	0.31430	15.36	Qp	9.30	0.00	9.90	34.56	-	-	59.86	-25.3
5	0.42680	12.41	Qp	9.30	0.00	9.90	31.61	-	-	57.32	-25.71
7	0.52800	10.79	Qp	9.30	0.00	9.90	29.99	-	-	56	-26.01
9	0.76200	4.15	Qp	9.30	0.00	9.90	23.35	-	-	56	-32.65
11	4.11900	15.76	Qp	9.40	0.00	9.90	35.06	-	-	56	-20.94

Qp - Quasi-Peak detector

Av - Average detection

LINE 2 RESULTS

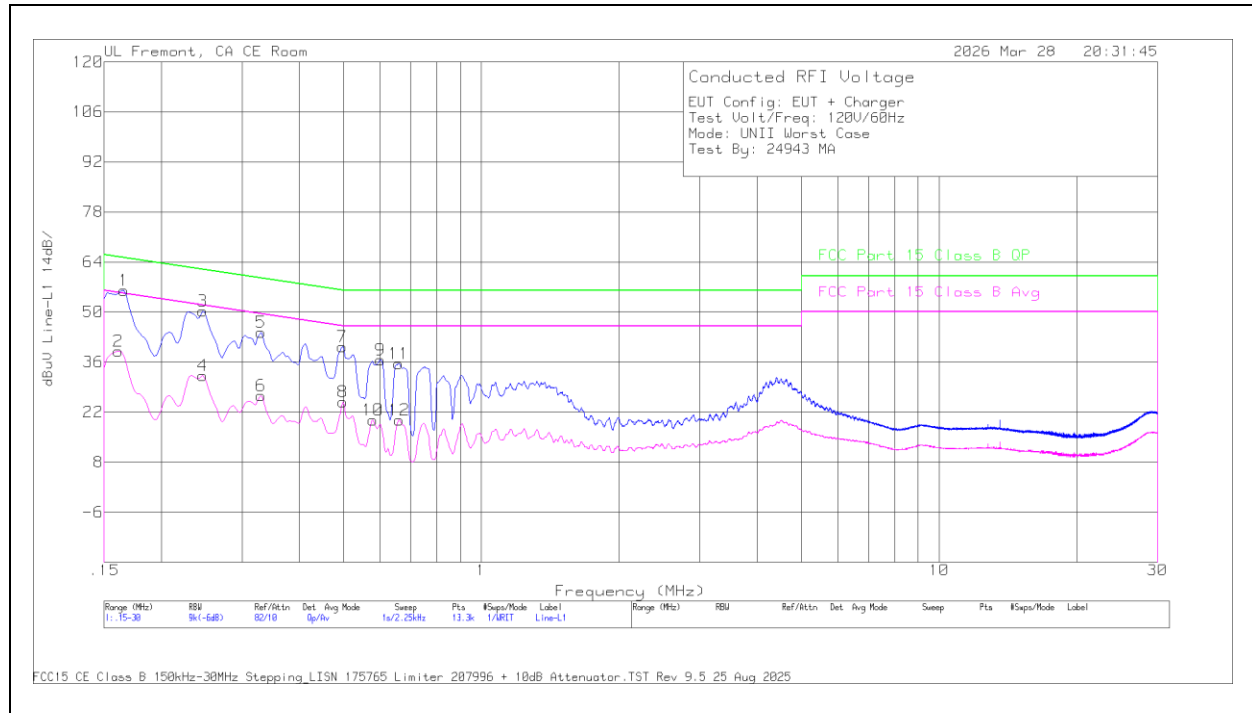
Range 2: Phase L2 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	CBL (dB)	CBL (dB)	10dB Atten (dB)	Corrected Reading (dBuV)	FCC Part 15 Class B Avg (dBuV)	Margin (dB)	FCC Part 15 class B QP (dBuV)	Margin (dB)
14	0.21530	14.98	Av	9.40	0.00	9.90	34.28	53	-18.72	-	-
16	0.31090	6.51	Av	9.40	0.00	9.90	25.81	49.95	-24.14	-	-
18	0.42900	4.44	Av	9.30	0.00	9.90	23.64	47.27	-23.63	-	-
20	0.53700	-0.08	Av	9.40	0.00	9.90	19.22	46	-26.78	-	-
22	0.80930	-3.81	Av	9.40	0.00	9.90	15.49	46	-30.51	-	-
24	4.11900	4.17	Av	9.40	0.00	9.90	23.47	46	-22.53	-	-
13	0.21300	25.16	Qp	9.40	0.00	9.90	44.46	-	-	63.09	-18.63
15	0.31650	14.76	Qp	9.40	0.00	9.90	34.06	-	-	59.8	-25.74
17	0.43350	12.53	Qp	9.30	0.00	9.90	31.73	-	-	57.19	-25.46
19	0.53480	11.08	Qp	9.40	0.00	9.90	30.38	-	-	56	-25.62
21	0.86100	3.88	Qp	9.40	0.00	9.90	23.18	-	-	56	-32.82
23	4.11900	16.32	Qp	9.40	0.00	9.90	35.62	-	-	56	-20.38

Qp - Quasi-Peak detector

Av - Average detection

2.2. AC POWER LINE WITH AC/DC ADAPTER

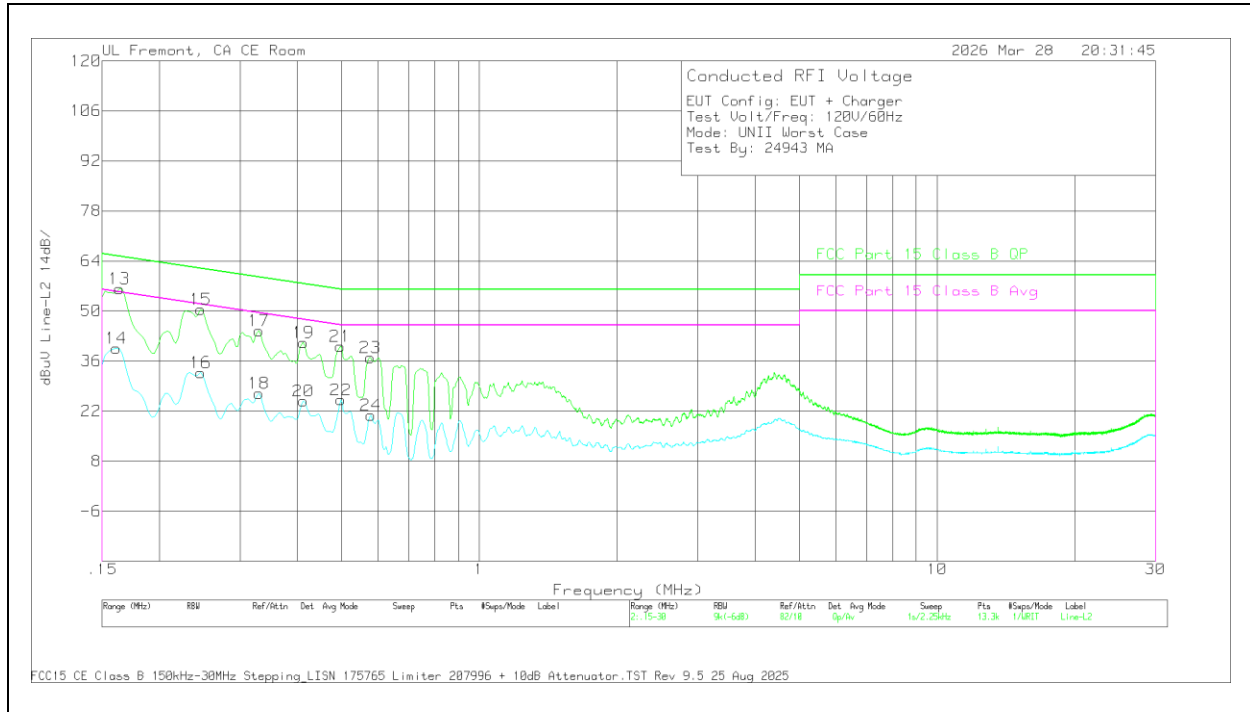
LINE 1 RESULTS



Range 1: Phase L1 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	CBL (dB)	LISN (dB)	10dB Atten (dB)	Corrected Reading (dBuV)	FCC Part 15 Class B Avg (dBuV)	Margin (dB)	FCC Part 15 class B QP (dBuV)	Margin (dB)
2	0.16130	19.69	Av	9.40	0.10	9.90	39.09	55.4	-16.31	-	-
4	0.24680	12.86	Av	9.40	0.00	9.90	32.16	51.87	-19.71	-	-
6	0.33000	7.4	Av	9.30	0.00	9.90	26.60	49.45	-22.85	-	-
8	0.49880	5.65	Av	9.30	0.00	9.90	24.85	46.02	-21.17	-	-
10	0.57980	0.61	Av	9.30	0.00	9.90	19.81	46	-26.19	-	-
12	0.66190	0.4	Av	9.30	0.00	10.00	19.70	46	-26.3	-	-
1	0.16580	36.67	Qp	9.40	0.10	9.90	56.07	-	-	65.17	-9.1
3	0.24680	30.96	Qp	9.40	0.00	9.90	50.26	-	-	61.87	-11.61
5	0.33000	25.06	Qp	9.30	0.00	9.90	44.26	-	-	59.45	-15.19
7	0.49650	21.11	Qp	9.30	0.00	9.90	40.31	-	-	56.06	-15.75
9	0.60230	17.41	Qp	9.30	0.00	9.90	36.61	-	-	56	-19.39
11	0.66080	16.26	Qp	9.30	0.00	10.00	35.56	-	-	56	-20.44

Qp - Quasi-Peak detector

Av - Average detection

LINE 2 RESULTS

Range 2: Phase L2 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	CBL (dB)	LISN (dB)	10dB Atten (dB)	Corrected Reading (dBuV)	FCC Part 15 Class B Avg (dBuV)	Margin (dB)	FCC Part 15 class B QP (dBuV)	Margin (dB)
14	0.16130	20.23	Av	9.40	0.10	10.00	39.63	55.4	-15.77	-	-
16	0.24680	13.41	Av	9.40	0.00	10.00	32.71	51.87	-19.16	-	-
18	0.33000	7.76	Av	9.30	0.00	10.00	26.96	49.45	-22.49	-	-
20	0.41330	5.58	Av	9.30	0.00	10.00	24.78	47.58	-22.8	-	-
22	0.49880	5.92	Av	9.30	0.00	10.00	25.12	46.02	-20.9	-	-
24	0.57980	1.59	Av	9.30	0.00	10.00	20.79	46	-25.21	-	-
13	0.16350	36.79	Qp	9.40	0.10	10.00	56.19	-	-	65.28	-9.09
15	0.24680	31.15	Qp	9.40	0.00	10.00	50.45	-	-	61.87	-11.42
17	0.33000	25.24	Qp	9.30	0.00	10.00	44.44	-	-	59.45	-15.01
19	0.41330	21.89	Qp	9.30	0.00	10.00	41.09	-	-	57.58	-16.49
21	0.49650	20.93	Qp	9.30	0.00	10.00	40.13	-	-	56.06	-15.93
23	0.57750	17.78	Qp	9.30	0.00	10.00	36.98	-	-	56	-19.02

Qp - Quasi-Peak detector

Av - Average detection

3. SETUP PHOTOS

Please refer to the setup report 16064952-EP1 FCC IC Setup Photos

END OF TEST REPORT