

RADIATED TEST REPORT

Report Number: 16064952-E13V2 & E15V2

Applicant : APPLE INC.
1 APPLE PARK WAY
CUPERTINO, CA 95014, U.S.A.

Model : A3447 (Parent)
A3719, A3720, A3721 (Variants)

Brand : APPLE

FCC ID : BCG-E9188A (Parent)
BCG-E9198A, BCG-E9203A, BCG-E9204A (Variants)

IC : 579C-E9188A (Parent)
579C-E9198A, 579C-E9203A, 579C-E9204A (Variants)

EUT Description : SMARTPHONE

Test Standard(s) : FCC 47 CFR PART 15 SUBPART E
ISED RSS-248 ISSUE 3
ISED RSS-GEN ISSUE 5 + A1 + A2

Date Of Issue:
2026-08-03

Prepared by:
UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538 U.S.A.
TEL: (510) 319-4000
FAX: (510) 661-0888



REPORT REVISION HISTORY

Rev.	Issue Date	Revisions	Revised By
V1	2026-07-01	Initial Review	Sahdev Badyal
V2	2026-08-03	TCB Comments Addressed	Sahdev Badyal

TABLE OF CONTENTS

1. RADIATED TEST RESULTS	4
1.1. TRANSMITTER OUTSIDE 5.925 - 7.125 GHz, 1- 18GHz (Dual Client)	7
1.1.1. 802.11be SISO SU MODE IN UNII-5 BAND – BANDEDGE	7
1.1.2. 802.11be SISO PARTIAL RU MODE IN UNII-5 BAND - BANDEDGE	9
1.1.3. 802.11be MIMO SU MODE IN UNII-5 BAND - BANDEDGE	11
1.1.4. 802.11be MIMO PARTIAL RU MODE IN UNII-5 BAND - BANDEDGE	13
1.1.5. 802.11be MIMO MODE IN UNII-5 BAND – SPURIOUS EMISSIONS	17
1.1.6. 802.11be MIMO MODE IN UNII-6 BAND – SPURIOUS EMISSIONS	31
1.1.7. 802.11be MIMO MODE IN UNII-7 BAND – SPURIOUS EMISSIONS	45
1.1.8. 802.11a SISO MODE IN UNII-8 BAND – BANDEDGE	59
1.1.9. 802.11be SISO SU MODE IN UNII-8 BAND – BANDEDGE	60
1.1.10. 802.11be SISO PARTIAL RU MODE IN UNII-8 BAND – BANDEDGE	62
1.1.11. 802.11a MIMO MODE IN UNII-8 BAND – BANDEDGE	66
1.1.12. 802.11be MIMO SU MODE IN UNII-8 BAND – BANDEDGE	67
1.1.13. 802.11be MIMO PARTIAL RU MODE IN UNII-8 BAND – BANDEDGE	69
1.1.14. 802.11a MIMO MODE IN UNII-8 BAND – SPURIOUS EMISSIONS	73
1.1.15. 802.11be MIMO MODE IN UNII-8 BAND – SPURIOUS EMISSIONS	74
1.2. TRANSMITTER OUTSIDE 6.115 - 7.125 GHz, 1- 18GHz (VLP)	88
1.2.1. 802.11be SISO/MIMO MODE IN UNII-5 BAND – LOW BANDEDGE	88
1.2.2. 802.11a SISO MODE IN UNII-8 BAND – BANDEDGE	88
1.2.3. 802.11be SISO SU MODE IN UNII-8 BAND – BANDEDGE	89
1.2.4. 802.11be SISO PARTIAL RU MODE IN UNII-8 BAND – BANDEDGE	91
1.2.5. 802.11a MIMO MODE IN UNII-8 BAND – BANDEDGE	93
1.2.6. 802.11be MIMO SU MODE IN UNII-8 BAND – BANDEDGE	94
1.2.7. 802.11be MIMO PARTIAL RU MODE IN UNII-8 BAND – BANDEDGE	96
1.2.8. 802.11a MIMO MODE IN UNII-8 BAND – SPURIOUS EMISSIONS	99
1.2.9. 802.11be MIMO MODE – SPURIOUS EMISSIONS	100
1.3. WORST CASE BELOW 1 GHz	112
1.4. WORST CASE 18-26 GHz	115
1.5. WORST CASE 26-40 GHz	118
2. AC POWER LINE CONDUCTED EMISSIONS	122
2.1. EUT WITH AC ADAPTER	123
2.2. EUT WITH LAPTOP	127
3. SPOT CHECK EVALUATION	131
3.1. MODEL DIFFERENCES	131
3.2. SPOT CHECK VERIFICATION RESULTS SUMMARY FOR A3719	132
3.3. SPOT CHECK VERIFICATION RESULTS SUMMARY FOR A3720	133
3.4. SPOT CHECK VERIFICATION RESULTS SUMMARY FOR A3721	134
4. SETUP PHOTOS	135

1. RADIATED TEST RESULTS

LIMITS

FCC §15.35(b)
FCC §15.205 Restricted bands
§15.209 and FCC §15.407(b)(6) -Un-Restricted bands

RSS-GEN 8.1
RSS-GEN 8.9 Un-Restricted bands
RSS-GEN 8.10 Restricted bands
RSS 248 Issue 3 section 4.6.2a

Any emissions outside of the 5.925-7.125 GHz band must not exceed an e.i.r.p. of -27dBm/MHz rms and -7dBm/MHz Peak.

General field strength limits at frequencies above 30 MHz;

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

Unwanted Emissions in Restricted Bands	KDB 789033 D02, Sections II - G.3, G.4, G.5, and G.6
Unwanted Emissions in Non-Restricted Bands	KDB 789033 D02, Sections II - G.3, G.4, and G.5
Radiated Spurious Emissions Below 30MHz	ANSI C63.10, Section 6.4

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements in the 30-1000MHz range, 9kHz for peak and/or quasi-peak detection measurements in the 0.15-30MHz range, and 200Hz for peak and/or quasi-peak detection measurements in the 9 to 150kHz range. Peak detection is used unless otherwise noted as quasi-peak or average (9-90kHz and 110-490kHz).

For pre-scans above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 30 kHz for peak measurements.

For final measurements above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements and as applicable for average measurements.

The spectrum from 30 MHz to 1GHz and 18GHz to 40 GHz is investigated with the transmitter set to transmit at the channel with highest output power as worst-case scenario. 1GHz to 18GHz was set to the lowest, middle, and highest channels in the 6 GHz bands.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

Note: The limits in CFR 47, Part 15, Subpart C, paragraph 15.209(a), are identical to those in RSS-Gen section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as report in the table) using free space impedance of 377 Ohms. For example, the measurement at frequency X kHz resulted in a level of Y dBuV/m, which is equivalent to $Y-51.5 = Z$ dBuA/m, which has the same margin, W dB to the corresponding RSS-Gen Table 6 limit as it has to 15.209(a) limit.

In addition:

RESULTS

The plots in these sections are for reference settings only for different bandwidths and different antennas.

KDB 414788 Open Field Site (OFS) and Chamber Correlation Justification

Based on FCC 15.31 (f) (2), measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed, and the chamber-measured test result is the worst-case test result.

1.1. TRANSMITTER OUTSIDE 5.925 - 7.125 GHz, 1- 18GHz (Dual Client)

1.1.1. 802.11be SISO SU MODE IN UNII-5 BAND – BANDEDGE

STATE A

UNII-5 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading ERP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (SU Mode)	5955	6	5.925000	-43.03	Pk	35.1	11.8	0.00	-38.30	-34.43	-	-	-7	-27.43	60	226	H
			5.924802	-37.98	Pk	35.1	11.8	0.00	-38.30	-29.38	-	-	-7	-22.38	60	226	H
			5.925000	-56.23	RMS	35.1	11.8	0.00	-38.30	-47.63	-27	-20.63	-	-	60	226	H
			5.924935	-55.64	RMS	35.1	11.8	0.00	-38.30	-47.04	-27	-20.04	-	-	60	226	H
			5.925000	-42.15	Pk	35.1	11.8	0.00	-38.30	-33.55	-	-	-7	-26.55	358	194	V
			5.923868	-40.73	Pk	35.1	11.8	0.00	-38.31	-32.14	-	-	-7	-25.14	358	194	V
		5	5.925000	-56.61	RMS	35.1	11.8	0.00	-38.30	-48.01	-27	-21.01	-	-	358	194	V
			5.924068	-56.33	RMS	35.1	11.8	0.00	-38.30	-47.73	-27	-20.73	-	-	358	194	V
			5.924135	-44.63	Pk	35.2	11.8	0.00	-36.20	-33.83	-	-	-7	-26.83	28	274	H
			5.924468	-59.04	RMS	35.2	11.8	0.00	-36.20	-48.24	-27	-21.24	-	-	28	274	H
			5.925000	-47.38	Pk	35.2	11.8	0.00	-36.20	-36.58	-	-	-7	-29.58	28	274	H
			5.925000	-59.39	RMS	35.2	11.8	0.00	-36.20	-48.59	-27	-21.59	-	-	28	274	H
			5.923268	-39.68	Pk	35.2	11.8	0.00	-36.13	-28.81	-	-	-7	-21.81	26	176	V
			5.924935	-56.32	RMS	35.2	11.8	0.00	-36.20	-45.52	-27	-18.52	-	-	26	176	V
			5.925000	-39.54	Pk	35.2	11.8	0.00	-36.20	-28.74	-	-	-7	-21.74	26	176	V
			5.925000	-57.05	RMS	35.2	11.8	0.00	-36.20	-46.25	-27	-19.25	-	-	26	176	V
EHT40 (SU Mode)	5965	6	5.923935	-31.84	Pk	35.2	11.8	0.00	-36.19	-21.03	-	-	-7	-14.03	130	240	H
			5.924135	-48.84	RMS	35.2	11.8	0.00	-36.20	-38.04	-27	-11.04	-	-	130	240	H
			5.925000	-34.14	Pk	35.2	11.8	0.00	-36.20	-23.34	-	-	-7	-16.34	130	240	H
			5.925000	-49.49	RMS	35.2	11.8	0.00	-36.20	-38.69	-27	-11.69	-	-	130	240	H
			5.921668	-31.68	Pk	35.2	11.8	0.00	-36.20	-20.88	-	-	-7	-13.88	87	151	V
			5.924268	-50.88	RMS	35.2	11.8	0.00	-36.20	-40.08	-27	-13.08	-	-	87	151	V
		5	5.925000	-35.90	Pk	35.2	11.8	0.00	-36.20	-25.10	-	-	-7	-18.10	87	151	V
			5.925000	-51.87	RMS	35.2	11.8	0.00	-36.20	-41.07	-27	-14.07	-	-	87	151	V
			5.925000	-36.38	Pk	35.1	11.8	0.00	-34.36	-23.84	-	-	-7	-16.84	154	255	H
			5.924002	-33.31	Pk	35.1	11.8	0.00	-34.36	-20.77	-	-	-7	-13.77	154	255	H
			5.925000	-51.78	RMS	35.1	11.8	0.00	-34.36	-39.24	-27	-12.24	-	-	154	255	H
			5.924668	-50.60	RMS	35.1	11.8	0.00	-34.36	-38.06	-27	-11.06	-	-	154	255	H
			5.925000	-31.19	Pk	35.1	11.8	0.00	-34.36	-18.65	-	-	-7	-11.65	128	135	V
			5.920868	-29.12	Pk	35.1	11.8	0.00	-34.36	-16.58	-	-	-7	-9.58	128	135	V
			5.925000	-46.66	RMS	35.1	11.8	0.00	-34.36	-34.12	-27	-7.12	-	-	128	135	V
			5.924802	-46.27	RMS	35.1	11.8	0.00	-34.36	-33.73	-27	-6.73	-	-	128	135	V
EHT80 (SU Mode)	5985	6	5.925000	-32.72	Pk	35.1	11.8	0.00	-34.36	-20.18	-	-	-7	-13.18	195	175	H
			5.920401	-29.93	Pk	35.1	11.8	0.00	-34.36	-17.39	-	-	-7	-10.39	195	175	H
			5.925000	-46.56	RMS	35.1	11.8	0.00	-34.36	-34.02	-27	-7.02	-	-	195	175	H
			5.924402	-45.83	RMS	35.1	11.8	0.00	-34.36	-33.29	-27	-6.29	-	-	195	175	H
			5.925000	-37.53	Pk	35.1	11.8	0.00	-34.36	-24.99	-	-	-7	-17.99	127	144	V
			5.920468	-34.28	Pk	35.1	11.8	0.00	-34.36	-21.74	-	-	-7	-14.74	127	144	V
		5	5.925000	-50.74	RMS	35.1	11.8	0.00	-34.36	-38.20	-27	-11.20	-	-	127	144	V
			5.924202	-50.33	RMS	35.1	11.8	0.00	-34.36	-37.79	-27	-10.79	-	-	127	144	V
			5.925000	-36.74	Pk	35.2	11.8	0.00	-36.28	-26.02	-	-	-7	-19.02	354	297	H
			5.914135	-35.12	Pk	35.2	11.8	0.00	-36.34	-24.46	-	-	-7	-17.46	354	297	H
			5.925000	-51.45	RMS	35.2	11.8	0.00	-36.28	-40.73	-27	-13.73	-	-	354	297	H
			5.922601	-50.92	RMS	35.2	11.8	0.00	-36.30	-40.22	-27	-13.22	-	-	354	297	H
			5.925000	-28.29	Pk	35.2	11.8	0.00	-36.28	-17.57	-	-	-7	-10.57	327	162	V
			5.922001	-26.16	Pk	35.2	11.8	0.00	-36.28	-15.44	-	-	-7	-8.44	327	162	V
			5.925000	-43.74	RMS	35.2	11.8	0.00	-36.28	-33.02	-27	-6.02	-	-	327	162	V
			5.924335	-42.32	RMS	35.2	11.8	0.00	-36.31	-31.63	-27	-4.63	-	-	327	162	V
EHT160 (SU Mode)	6025	6	5.925000	-33.97	Pk	35.1	11.8	0.00	-34.36	-21.43	-	-	-7	-14.43	176	213	H
			5.892201	-27.17	Pk	35.0	11.8	0.00	-34.40	-14.77	-	-	-7	-7.77	176	213	H
			5.925000	-46.58	RMS	35.1	11.8	0.14	-34.36	-33.90	-27	-6.90	-	-	176	213	H
			5.892068	-44.10	RMS	35.0	11.8	0.14	-34.40	-31.56	-27	-4.56	-	-	176	213	H
			5.925000	-44.02	Pk	35.1	11.8	0.00	-34.36	-31.48	-	-	-7	-24.48	122	142	H
			5.892468	-38.72	Pk	35.0	11.8	0.00	-34.40	-26.32	-	-	-7	-19.32	122	142	H
		5	5.925000	-56.64	RMS	35.1	11.8	0.14	-34.36	-43.96	-27	-16.96	-	-	122	142	H
			5.914668	-55.21	RMS	35.1	11.8	0.14	-34.37	-42.54	-27	-15.54	-	-	122	142	H
			5.925000	-38.54	Pk	35.4	11.8	0.00	-37.10	-28.44	-	-	-7	-21.44	345	275	H
			5.891868	-32.22	Pk	35.4	11.8	0.00	-37.20	-22.22	-	-	-7	-15.22	345	275	H
			5.925000	-52.34	RMS	35.4	11.8	0.14	-37.10	-42.10	-27	-15.10	-	-	345	275	H
			5.890068	-50.16	RMS	35.4	11.8	0.14	-37.20	-40.02	-27	-13.02	-	-	345	275	H
			5.925000	-30.16	Pk	35.4	11.8	0.00	-37.10	-20.06	-	-	-7	-13.06	316	163	V
			5.892201	-23.56	Pk	35.4	11.8	0.00	-37.20	-13.56	-	-	-7	-6.56	316	163	V
			5.925000	-42.06	RMS	35.4	11.8	0.14	-37.10	-31.82	-27	-4.82	-	-	316	163	V
			5.897335	-41.21	RMS	35.4	11.8	0.14	-37.20	-31.07	-27	-4.07	-	-	316	163	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

STATE B

UNI-5 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (SU Mode)	5955	6	5.925000	-45.59	Pk	35.3	11.80	0.00	-29.9	-28.39	-	-	-7	-21.39	50	188	H
			5.924468	-42.97	Pk	35.4	11.80	0.00	-29.9	-25.67	-	-	-7	-18.67	50	188	H
			5.925000	-62.41	RMS	35.3	11.80	0.00	-29.9	-45.21	-27	-18.21	-	-	50	188	H
			5.924802	-62.18	RMS	35.3	11.80	0.00	-29.9	-44.98	-27	-17.98	-	-	50	188	H
			5.925000	-49.98	Pk	35.3	11.80	0.00	-29.9	-32.78	-	-	-7	-25.78	17	170	V
			5.923268	-45.40	Pk	35.3	11.80	0.00	-29.8	-28.10	-	-	-7	-21.10	17	170	V
		5	5.925000	-64.63	RMS	35.3	11.80	0.00	-29.9	-47.43	-27	-20.43	-	-	17	170	V
			5.924802	-63.55	RMS	35.3	11.80	0.00	-29.9	-46.35	-27	-19.35	-	-	17	170	V
			5.925000	-52.49	Pk	35.3	11.80	0.00	-29.9	-35.29	-	-	-7	-28.29	96	101	H
			5.924335	-49.41	Pk	35.4	11.80	0.00	-29.9	-32.11	-	-	-7	-25.11	96	101	H
			5.925000	-65.29	RMS	35.3	11.80	0.00	-29.9	-48.09	-27	-21.09	-	-	96	101	H
			5.923668	-64.68	RMS	35.4	11.80	0.00	-29.9	-47.38	-27	-20.38	-	-	96	101	H
			5.925000	-46.01	Pk	35.3	11.80	0.00	-29.9	-28.81	-	-	-7	-21.81	0	132	V
			5.924735	-44.99	Pk	35.3	11.80	0.00	-29.9	-27.79	-	-	-7	-20.79	0	132	V
			5.925000	-61.61	RMS	35.3	11.80	0.00	-29.9	-44.41	-27	-17.41	-	-	0	132	V
			5.924402	-61.15	RMS	35.4	11.80	0.00	-29.9	-43.85	-27	-16.85	-	-	0	132	V
EHT40 (SU Mode)	5965	6	5.925000	-33.74	Pk	35.1	11.8	0.00	-34.36	-21.20	-	-	-7	-14.20	41	182	H
			5.923268	-31.51	Pk	35.1	11.8	0.00	-34.36	-18.97	-	-	-7	-11.97	41	182	H
			5.925000	-50.25	RMS	35.1	11.8	0.00	-34.36	-37.71	-27	-10.71	-	-	41	182	H
			5.924202	-49.77	RMS	35.1	11.8	0.00	-34.36	-37.23	-27	-10.23	-	-	41	182	H
			5.925000	-39.15	Pk	35.1	11.8	0.00	-34.36	-26.61	-	-	-7	-19.61	289	146	V
			5.924402	-37.73	Pk	35.1	11.8	0.00	-34.36	-25.19	-	-	-7	-18.19	289	146	V
		5	5.925000	-54.34	RMS	35.1	11.8	0.00	-34.36	-41.80	-27	-14.80	-	-	289	146	V
			5.924935	-54.53	RMS	35.1	11.8	0.00	-34.36	-41.99	-27	-14.99	-	-	289	146	V
			5.925000	-35.90	Pk	35.1	11.8	0.00	-34.36	-23.36	-	-	-7	-16.36	324	363	H
			5.923868	-32.99	Pk	35.1	11.8	0.00	-34.36	-20.45	-	-	-7	-13.45	324	363	H
			5.925000	-52.61	RMS	35.1	11.8	0.00	-34.36	-40.07	-27	-13.07	-	-	324	363	H
			5.924335	-51.81	RMS	35.1	11.8	0.00	-34.36	-39.27	-27	-12.27	-	-	324	363	H
			5.925000	-27.49	Pk	35.1	11.8	0.00	-34.36	-14.95	-	-	-7	-7.95	15	221	V
			5.922668	-28.77	Pk	35.1	11.8	0.00	-34.36	-16.23	-	-	-7	-9.23	15	221	V
			5.925000	-47.11	RMS	35.1	11.8	0.00	-34.36	-34.57	-27	-7.57	-	-	15	221	V
			5.924802	-44.85	RMS	35.1	11.8	0.00	-34.36	-32.31	-27	-5.31	-	-	15	221	V
EHT80 (SU Mode)	5985	6	5.925000	-29.74	Pk	35.2	11.8	0.00	-36.40	-19.14	-	-	-7	-12.14	84	186	H
			5.920335	-27.36	Pk	35.2	11.8	0.00	-36.30	-16.66	-	-	-7	-9.66	84	186	H
			5.925000	-43.68	RMS	35.2	11.8	0.00	-36.40	-33.08	-27	-6.08	-	-	84	186	H
			5.923801	-42.47	RMS	35.2	11.8	0.00	-36.40	-31.87	-27	-4.87	-	-	84	186	H
			5.925000	-32.54	Pk	35.2	11.8	0.00	-36.40	-21.94	-	-	-7	-14.94	2	139	V
			5.920668	-31.24	Pk	35.2	11.8	0.00	-36.30	-20.54	-	-	-7	-13.54	2	139	V
		5	5.925000	-47.12	RMS	35.2	11.8	0.00	-36.40	-36.52	-27	-9.52	-	-	2	139	V
			5.921068	-46.88	RMS	35.2	11.8	0.00	-36.30	-36.18	-27	-9.18	-	-	2	139	V
			5.925000	-38.59	Pk	35.2	11.8	0.00	-36.28	-27.87	-	-	-7	-20.87	54	144	H
			5.924135	-36.32	Pk	35.2	11.8	0.00	-36.31	-25.63	-	-	-7	-18.63	54	144	H
			5.925000	-52.47	RMS	35.2	11.8	0.00	-36.28	-41.75	-27	-14.75	-	-	54	144	H
			5.922935	-52.28	RMS	35.2	11.8	0.00	-36.31	-41.59	-27	-14.59	-	-	54	144	H
			5.925000	-29.77	Pk	35.2	11.8	0.00	-36.28	-19.05	-	-	-7	-12.05	349	107	V
			5.921801	-27.32	Pk	35.2	11.8	0.00	-36.28	-16.60	-	-	-7	-9.60	349	107	V
			5.925000	-44.36	RMS	35.2	11.8	0.00	-36.28	-33.64	-27	-6.64	-	-	349	107	V
			5.924868	-43.95	RMS	35.2	11.8	0.00	-36.29	-33.24	-27	-6.24	-	-	349	107	V
EHT160 (SU Mode)	6025	6	5.925000	-54.25	Pk	35.1	11.8	0.00	-15.90	-23.25	-	-	-7	-16.25	331	170	H
			5.891868	-47.76	Pk	35.0	11.8	0.00	-16.00	-16.96	-	-	-7	-9.96	331	170	H
			5.925000	-67.01	RMS	35.1	11.8	0.14	-15.90	-35.87	-27	-8.87	-	-	331	170	H
			5.893535	-65.34	RMS	35.0	11.8	0.14	-16.00	-34.40	-27	-7.40	-	-	331	170	H
			5.925000	-59.81	Pk	35.1	11.8	0.00	-15.90	-28.81	-	-	-7	-21.81	354	127	V
			5.892401	-53.35	Pk	35.0	11.8	0.00	-16.00	-22.55	-	-	-7	-15.55	354	127	V
		5	5.925000	-70.91	RMS	35.1	11.8	0.14	-15.90	-39.77	-27	-12.77	-	-	354	127	V
			5.924268	-70.29	RMS	35.1	11.8	0.14	-15.90	-39.15	-27	-12.15	-	-	354	127	V
			5.925000	-45.82	Pk	35.2	11.8	0.00	-23.48	-22.30	-	-	-7	-15.3	197	373	H
			5.892268	-40.99	Pk	35.2	11.8	0.00	-23.40	-17.39	-	-	-7	-10.39	197	373	H
			5.925000	-80.21	RMS	35.2	11.8	0.14	-23.48	-36.55	-27	-9.55	-	-	197	373	H
			5.900935	-59.18	RMS	35.2	11.8	0.14	-23.52	-35.56	-27	-8.56	-	-	197	373	H
			5.925000	-42.74	Pk	35.2	11.8	0.00	-23.48	-19.22	-	-	-7	-12.22	171	158	V
			5.892201	-37.03	Pk	35.2	11.8	0.00	-23.41	-13.44	-	-	-7	-6.44	171	158	V
			5.925	-55.86	RMS	35.2	11.8	0.14	-23.48	-32.2	-27	-5.2	-	-	171	158	V
			5.897201	-54.58	RMS	35.2	11.8	0.14	-23.39	-30.83	-27	-3.83	-	-	171	158	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.2. 802.11be SISO PARTIAL RU MODE IN UNII-5 BAND - BANDEDGE**STATE A**

UNII-5 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (26T RU0)	5955	6	5.828668	-59.75	RMS	35.0	11.8	0.00	-36.53	-49.48	-27	-22.48	-	-	57	258	H
			5.924668	-45.94	Pk	35.2	11.8	0.00	-36.20	-35.14	-	-	-7	-28.14	57	258	H
			5.925000	-45.61	Pk	35.2	11.8	0.00	-36.20	-34.81	-	-	-7	-27.81	57	258	H
			5.925000	-60.59	RMS	35.2	11.8	0.00	-36.20	-49.79	-27	-22.79	-	-	57	258	H
			5.909335	-60.39	RMS	35.2	11.8	0.00	-36.20	-49.59	-27	-22.59	-	-	358	172	V
			5.924468	-48.44	Pk	35.2	11.8	0.00	-36.20	-37.64	-	-	-7	-30.64	358	172	V
		5	5.925000	-50.20	Pk	35.2	11.8	0.00	-36.20	-39.40	-	-	-7	-32.40	358	172	V
			5.925000	-62.03	RMS	35.2	11.8	0.00	-36.20	-51.23	-27	-24.23	-	-	358	172	V
			5.906001	-48.29	Pk	35.2	11.8	0.00	-36.20	-37.49	-	-	-7	-30.49	16	362	H
			5.924535	-60.59	RMS	35.2	11.8	0.00	-36.20	-49.79	-27	-22.79	-	-	16	362	H
			5.925000	-50.02	Pk	35.2	11.8	0.00	-36.20	-39.22	-	-	-7	-32.22	16	362	H
			5.925000	-61.61	RMS	35.2	11.8	0.00	-36.20	-50.81	-27	-23.81	-	-	16	362	H
			5.922668	-59.66	RMS	35.2	11.8	0.00	-36.13	-48.79	-27	-21.79	-	-	48	169	V
			5.923668	-47.26	Pk	35.2	11.8	0.00	-36.17	-36.43	-	-	-7	-29.43	48	169	V
			5.925000	-50.66	Pk	35.2	11.8	0.00	-36.20	-39.86	-	-	-7	-32.86	48	169	V
			5.925000	-60.55	RMS	35.2	11.8	0.00	-36.20	-49.75	-27	-22.75	-	-	48	169	V
EHT20 (52+26T RU70)	5955	6	5.923735	-60.30	RMS	35.2	11.8	0.00	-36.17	-49.47	-27	-22.47	-	-	50	215	H
			5.923935	-46.15	Pk	35.2	11.8	0.00	-36.19	-35.34	-	-	-7	-28.34	50	215	H
			5.925000	-48.79	Pk	35.2	11.8	0.00	-36.20	-37.99	-	-	-7	-30.99	50	215	H
			5.925000	-61.56	RMS	35.2	11.8	0.00	-36.20	-50.76	-27	-23.76	-	-	50	215	H
			5.867468	-48.28	Pk	35.0	11.8	0.00	-36.40	-37.88	-	-	-7	-30.88	354	162	V
			5.909201	-60.52	RMS	35.2	11.8	0.00	-36.20	-49.72	-27	-22.72	-	-	354	162	V
		5	5.925000	-49.87	Pk	35.2	11.8	0.00	-36.20	-39.07	-	-	-7	-32.07	354	162	V
			5.925000	-61.22	RMS	35.2	11.8	0.00	-36.20	-50.42	-27	-23.42	-	-	354	162	V
			5.918468	-60.34	RMS	35.2	11.8	0.00	-36.25	-49.59	-27	-22.59	-	-	40	303	H
			5.922735	-48.34	Pk	35.2	11.8	0.00	-36.13	-37.47	-	-	-7	-30.47	40	303	H
			5.925000	-49.77	Pk	35.2	11.8	0.00	-36.20	-38.97	-	-	-7	-31.97	40	303	H
			5.925000	-60.93	RMS	35.2	11.8	0.00	-36.20	-50.13	-27	-23.13	-	-	40	303	H
			5.839134	-46.77	Pk	34.9	11.8	0.00	-36.59	-36.66	-	-	-7	-29.66	57	179	V
			5.906201	-59.76	RMS	35.2	11.8	0.00	-36.20	-48.96	-27	-21.96	-	-	57	179	V
			5.925000	-49.26	Pk	35.2	11.8	0.00	-36.20	-38.46	-	-	-7	-31.46	57	179	V
			5.925000	-61.03	RMS	35.2	11.8	0.00	-36.20	-50.23	-27	-23.23	-	-	57	179	V
EHT80 (484+242T RU93)	5985	6	5.925000	-31.15	Pk	35.1	11.8	0.00	-34.36	-18.61	-	-	-7	-11.61	193	198	H
			5.921801	-31.09	Pk	35.1	11.8	0.00	-34.36	-18.55	-	-	-7	-11.55	193	198	H
			5.925000	-52.52	RMS	35.1	11.8	0.00	-34.36	-39.98	-27	-12.98	-	-	193	198	H
			5.922335	-51.05	RMS	35.1	11.8	0.00	-34.36	-38.51	-27	-11.51	-	-	193	198	H
			5.925000	-36.16	Pk	35.1	11.8	0.00	-34.36	-23.62	-	-	-7	-16.62	131	193	V
			5.924868	-36.52	Pk	35.1	11.8	0.00	-34.36	-23.98	-	-	-7	-16.98	131	193	V
		5	5.925000	-57.43	RMS	35.1	11.8	0.00	-34.36	-44.89	-27	-17.89	-	-	131	193	V
			5.921468	-55.62	RMS	35.1	11.8	0.00	-34.36	-43.08	-27	-16.08	-	-	131	193	V
			5.925000	-37.93	Pk	35.4	11.8	0.00	-37.02	-27.75	-	-	-7	-20.75	326	255	H
			5.919001	-37.15	Pk	35.4	11.8	0.00	-37.02	-26.97	-	-	-7	-19.97	326	255	H
			5.925000	-58.84	RMS	35.4	11.8	0.00	-37.02	-48.66	-27	-21.66	-	-	326	255	H
			5.922201	-56.84	RMS	35.4	11.8	0.00	-37.07	-46.71	-27	-19.71	-	-	326	255	H
			5.925000	-31.84	Pk	35.4	11.8	0.00	-37.02	-21.66	-	-	-7	-14.66	358	173	V
			5.922068	-31.39	Pk	35.4	11.8	0.00	-37.07	-21.26	-	-	-7	-14.26	358	173	V
			5.925000	-50.32	RMS	35.4	11.8	0.00	-37.02	-40.14	-27	-13.14	-	-	358	173	V
			5.920668	-51.14	RMS	35.4	11.8	0.00	-37.04	-40.98	-27	-13.98	-	-	358	173	V
EHT160 (996+484T S95)	6025	6	5.925000	-37.40	Pk	35.1	11.8	0.00	-34.36	-24.86	-	-	-7	-17.86	175	190	H
			5.872201	-33.07	Pk	34.9	11.8	0.00	-34.40	-20.77	-	-	-7	-13.77	175	190	H
			5.925000	-52.90	RMS	35.1	11.8	0.00	-34.36	-40.36	-27	-13.36	-	-	175	190	H
			5.921535	-52.45	RMS	35.1	11.8	0.00	-34.36	-39.91	-27	-12.91	-	-	175	190	H
			5.925000	-44.20	Pk	35.1	11.8	0.00	-34.36	-31.66	-	-	-7	-24.66	120	157	V
			5.872335	-37.95	Pk	34.9	11.8	0.00	-34.40	-25.65	-	-	-7	-18.65	120	157	V
		5	5.925000	-58.09	RMS	35.1	11.8	0.00	-34.36	-45.55	-27	-18.55	-	-	120	157	V
			5.918735	-57.00	RMS	35.1	11.8	0.00	-34.36	-44.46	-27	-17.46	-	-	120	157	V
			5.925000	-45.55	Pk	35.4	11.8	0.00	-37.10	-35.45	-	-	-7	-28.45	345	275	H
			5.872201	-38.64	Pk	35.4	11.8	0.00	-37.30	-28.74	-	-	-7	-21.74	345	275	H
			5.925000	-58.78	RMS	35.4	11.8	0.00	-37.10	-48.68	-27	-21.68	-	-	345	275	H
			5.915468	-58.00	RMS	35.4	11.8	0.00	-37.20	-48.00	-27	-21.00	-	-	345	275	H
			5.925000	-35.23	Pk	35.4	11.8	0.00	-37.10	-25.13	-	-	-7	-18.13	316	163	V
			5.872068	-30.43	Pk	35.4	11.8	0.00	-37.30	-20.53	-	-	-7	-13.53	316	163	V
			5.925000	-51.87	RMS	35.4	11.8	0.00	-37.10	-41.77	-27	-14.77	-	-	316	163	V
			5.924735	-50.33	RMS	35.4	11.8	0.00	-37.10	-40.23	-27	-13.23	-	-	316	163	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

STATE B

UNI-5 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (26T RU0)	5955	6	5.925000	-63.28	Pk	35.2	11.8	0	-23.48	-39.76	-	-	-7	-32.76	254	217	H
			5.895668	-61.00	Pk	35.2	11.8	0	-23.36	-37.36	-	-	-7	-30.36	254	217	H
			5.925000	-73.73	RMS	35.2	11.8	0	-23.48	-50.21	-27	-23.21	-	-	254	217	H
			5.907735	-72.82	RMS	35.2	11.8	0	-23.40	-49.22	-27	-22.22	-	-	254	217	H
			5.925000	-63.15	Pk	35.2	11.8	0	-23.48	-39.63	-	-	-7	-32.63	20	347	V
			5.874135	-61.31	Pk	35.1	11.8	0	-23.42	-37.83	-	-	-7	-30.83	20	347	V
		5	5.925000	-74.46	RMS	35.2	11.8	0	-23.48	-50.94	-27	-23.94	-	-	20	347	V
			5.908668	-73.22	RMS	35.2	11.8	0	-23.41	-49.63	-27	-22.63	-	-	20	347	V
			5.925000	-51.70	Pk	35.6	11.8	0	-36.66	-40.96	-	-	-7	-33.96	330	291	H
			5.753734	-47.81	Pk	35.0	11.8	0	-36.70	-37.71	-	-	-7	-30.71	330	291	H
			5.925000	-61.98	RMS	35.6	11.8	0	-36.66	-51.24	-27	-24.24	-	-	330	291	H
			5.887135	-60.63	RMS	35.5	11.8	0	-36.67	-50.00	-27	-23.00	-	-	330	291	H
			5.925000	-45.95	Pk	35.6	11.8	0	-36.66	-35.21	-	-	-7	-28.21	356	178	V
			5.923135	-44.98	Pk	35.6	11.8	0	-36.67	-34.25	-	-	-7	-27.25	356	178	V
			5.925000	-60.69	RMS	35.6	11.8	0	-36.66	-49.95	-27	-22.95	-	-	356	178	V
			5.906201	-60.03	RMS	35.6	11.8	0	-36.71	-49.34	-27	-22.34	-	-	356	178	V
EHT20 (52+26T RU70)	5955	6	5.925000	-63.18	Pk	35.2	11.8	0	-23.48	-39.66	-	-	-7	-32.66	254	217	H
			5.918201	-60.88	Pk	35.2	11.8	0	-23.58	-37.46	-	-	-7	-30.46	254	217	H
			5.925000	-73.75	RMS	35.2	11.8	0	-23.48	-50.23	-27	-23.23	-	-	254	217	H
			5.869335	-72.28	RMS	35.1	11.8	0	-23.45	-48.83	-27	-21.83	-	-	254	217	H
			5.925000	-62.67	Pk	35.2	11.8	0	-23.48	-39.15	-	-	-7	-32.15	20	347	V
			5.851268	-61.10	Pk	35.1	11.8	0	-23.54	-37.74	-	-	-7	-30.74	20	347	V
		5	5.925000	-74.03	RMS	35.2	11.8	0	-23.48	-50.51	-27	-23.51	-	-	20	347	V
			5.904468	-73.24	RMS	35.2	11.8	0	-23.43	-49.67	-27	-22.67	-	-	20	347	V
			5.925000	-50.56	Pk	35.6	11.8	0	-36.66	-39.82	-	-	-7	-32.82	46	206	H
			5.917801	-48.08	Pk	35.6	11.8	0	-36.71	-37.39	-	-	-7	-30.39	46	206	H
			5.925000	-61.17	RMS	35.6	11.8	0	-36.66	-50.43	-27	-23.43	-	-	46	206	H
			5.918201	-60.64	RMS	35.6	11.8	0	-36.72	-49.96	-27	-22.96	-	-	46	206	H
			5.925000	-44.70	Pk	35.6	11.8	0	-36.66	-33.96	-	-	-7	-26.96	352	175	V
			5.924868	-43.81	Pk	35.6	11.8	0	-36.66	-33.07	-	-	-7	-26.07	352	175	V
			5.925000	-60.23	RMS	35.6	11.8	0	-36.66	-49.49	-27	-22.49	-	-	352	175	V
			5.916268	-60.09	RMS	35.6	11.8	0	-36.70	-49.39	-27	-22.39	-	-	352	175	V
EHT80 (484+242T RU93)	5985	6	5.925000	-31.76	Pk	35.2	11.8	0	-36.40	-21.16	-	-	-7	-14.16	84	187	H
			5.921935	-29.81	Pk	35.2	11.8	0	-36.30	-19.11	-	-	-7	-12.11	84	187	H
			5.925000	-50.28	RMS	35.2	11.8	0	-36.40	-39.68	-27	-12.68	-	-	84	187	H
			5.924802	-48.53	RMS	35.2	11.8	0	-36.40	-37.93	-27	-10.93	-	-	84	187	H
			5.925000	-34.48	Pk	35.2	11.8	0	-36.40	-23.88	-	-	-7	-16.88	2	140	V
			5.924868	-33.28	Pk	35.2	11.8	0	-36.40	-22.68	-	-	-7	-15.68	2	140	V
		5	5.925000	-53.51	RMS	35.2	11.8	0	-36.40	-42.91	-27	-15.91	-	-	2	140	V
			5.924868	-52.70	RMS	35.2	11.8	0	-36.40	-42.10	-27	-15.10	-	-	2	140	V
			5.925000	-34.22	Pk	35.4	11.8	0	-37.02	-24.04	-	-	-7	-17.04	330	250	H
			5.924668	-33.69	Pk	35.4	11.8	0	-37.03	-23.52	-	-	-7	-16.52	330	250	H
			5.925000	-54.44	RMS	35.4	11.8	0	-37.02	-44.26	-27	-17.26	-	-	330	250	H
			5.921868	-53.48	RMS	35.4	11.8	0	-37.07	-43.35	-27	-16.35	-	-	330	250	H
			5.925000	-30.27	Pk	35.4	11.8	0	-37.02	-20.09	-	-	-7	-13.09	5	178	V
			5.924802	-28.49	Pk	35.4	11.8	0	-37.02	-18.31	-	-	-7	-11.31	5	178	V
			5.925000	-49.12	RMS	35.4	11.8	0	-37.02	-38.94	-27	-11.94	-	-	5	178	V
			5.919668	-48.63	RMS	35.4	11.8	0	-37.03	-38.46	-27	-11.46	-	-	5	178	V
EHT160 (996+484T S95)	6025	6	5.925000	-58.83	Pk	35.1	11.80	0	-15.90	-27.83	-	-	-7	-20.83	329	171	H
			5.871868	-53.38	Pk	35.0	11.80	0	-15.90	-22.48	-	-	-7	-15.48	329	171	H
			5.925000	-73.91	RMS	35.1	11.80	0	-15.90	-42.91	-27	-15.91	-	-	329	171	H
			5.924802	-73.09	RMS	35.1	11.80	0	-15.90	-42.09	-27	-15.09	-	-	329	171	H
			5.925000	-65.69	Pk	35.1	11.80	0	-15.90	-34.69	-	-	-7	-27.69	354	127	V
			5.872201	-59.64	Pk	35.0	11.80	0	-15.90	-28.74	-	-	-7	-21.74	354	127	V
		5	5.925000	-77.91	RMS	35.1	11.80	0	-15.90	-46.91	-27	-19.91	-	-	354	127	V
			5.921001	-76.87	RMS	35.1	11.80	0	-16.00	-45.97	-27	-18.97	-	-	354	127	V
			5.925000	-55.39	Pk	35.2	11.8	0	-23.48	-31.87	-	-	-7	-24.87	197	373	H
			5.871935	-48.99	Pk	35.1	11.8	0	-23.45	-25.54	-	-	-7	-18.54	197	373	H
			5.925000	-70.07	RMS	35.2	11.8	0	-23.48	-46.55	-27	-19.55	-	-	197	373	H
			5.921401	-68.50	RMS	35.2	11.8	0	-23.49	-44.99	-27	-17.99	-	-	197	373	H
			5.925000	-49.49	Pk	35.2	11.8	0	-23.48	-25.97	-	-	-7	-18.97	171	158	V
			5.871935	-45.00	Pk	35.1	11.8	0	-23.45	-21.55	-	-	-7	-14.55	171	158	V
			5.925	-66.05	RMS	35.2	11.8	0	-23.48	-42.53	-27	-15.53	-	-	171	158	V
			5.924468	-65.01	RMS	35.2	11.8	0	-23.48	-41.49	-27	-14.49	-	-	171	158	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.3. 802.11be MIMO SU MODE IN UNII-5 BAND - BANDEDGE**STATE A**

UNII-5 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (SU Mode)	5955	6+5	5.921801	-41.03	Pk	35.2	11.8	0.00	-36.20	-30.23	-	-	-7	-23.23	97	162	H
			5.924935	-56.90	RMS	35.2	11.8	0.00	-36.20	-46.10	-27	-19.10	-	-	97	162	H
			5.925000	-41.69	Pk	35.2	11.8	0.00	-36.20	-30.89	-	-	-7	-23.89	97	162	H
			5.925000	-57.09	RMS	35.2	11.8	0.00	-36.20	-46.29	-27	-19.29	-	-	97	162	H
			5.921735	-36.90	Pk	35.2	11.8	0.00	-36.20	-26.10	-	-	-7	-19.10	15	120	V
			5.924802	-55.48	RMS	35.2	11.8	0.00	-36.20	-44.68	-27	-17.68	-	-	15	120	V
			5.925000	-40.93	Pk	35.2	11.8	0.00	-36.20	-30.13	-	-	-7	-23.13	15	120	V
			5.925000	-54.69	RMS	35.2	11.8	0.00	-36.20	-43.89	-27	-16.89	-	-	15	120	V
EHT40 (SU Mode)	5965	6+5	5.925000	-35.63	Pk	35.3	11.8	0.00	-34.74	-23.27	-	-	-7	-16.27	46	185	H
			5.921135	-31.17	Pk	35.2	11.8	0.00	-34.75	-18.92	-	-	-7	-11.92	46	185	H
			5.925000	-51.70	RMS	35.3	11.8	0.00	-34.74	-39.34	-27	-12.34	-	-	46	185	H
			5.922468	-48.65	RMS	35.3	11.8	0.00	-34.74	-36.29	-27	-9.29	-	-	46	185	H
			5.925000	-31.85	Pk	35.3	11.8	0.00	-34.74	-19.49	-	-	-7	-12.49	67	150	V
			5.924868	-29.71	Pk	35.3	11.8	0.00	-34.74	-17.35	-	-	-7	-10.35	67	150	V
			5.925000	-46.34	RMS	35.3	11.8	0.00	-34.74	-33.98	-27	-6.98	-	-	67	150	V
			5.921268	-45.74	RMS	35.2	11.8	0.00	-34.75	-33.49	-27	-6.49	-	-	67	150	V
EHT80 (SU Mode)	5985	6+5	5.925000	-33.45	Pk	35.2	11.8	0.00	-36.40	-22.85	-	-	-7	-15.85	28	333	H
			5.920735	-28.49	Pk	35.2	11.8	0.00	-36.30	-17.79	-	-	-7	-10.79	28	333	H
			5.925000	-47.97	RMS	35.2	11.8	0.00	-36.40	-37.37	-27	-10.37	-	-	28	333	H
			5.920335	-46.17	RMS	35.2	11.8	0.00	-36.30	-35.47	-27	-8.47	-	-	28	333	H
			5.925000	-29.54	Pk	35.2	11.8	0.00	-36.40	-18.94	-	-	-7	-11.94	3	128	V
			5.920668	-23.99	Pk	35.2	11.8	0.00	-36.30	-13.29	-	-	-7	-6.29	3	128	V
			5.925000	-42.07	RMS	35.2	11.8	0.00	-36.40	-31.47	-27	-4.47	-	-	3	128	V
			5.920868	-40.80	RMS	35.2	11.8	0.00	-36.30	-30.10	-27	-3.10	-	-	3	128	V
EHT160 (SU Mode)	6025	6+5	5.925000	-36.96	Pk	35.3	11.8	0.00	-34.74	-24.60	-	-	-7	-17.60	102	178	H
			5.890335	-30.24	Pk	35.2	11.8	0.00	-34.93	-18.17	-	-	-7	-11.17	102	178	H
			5.925000	-50.59	RMS	35.3	11.8	0.14	-34.74	-38.09	-27	-11.09	-	-	102	178	H
			5.920868	-48.83	RMS	35.2	11.8	0.14	-34.75	-36.44	-27	-9.44	-	-	102	178	H
			5.925000	-29.52	Pk	35.3	11.8	0.00	-34.74	-17.16	-	-	-7	-10.16	8	158	V
			5.890068	-24.17	Pk	35.2	11.8	0.00	-34.94	-12.11	-	-	-7	-5.11	8	158	V
			5.925000	-44.90	RMS	35.3	11.8	0.14	-34.74	-32.40	-27	-5.40	-	-	8	158	V
			5.900001	-42.70	RMS	35.2	11.8	0.14	-34.93	-30.49	-27	-3.49	-	-	8	158	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

STATE B

UNII-5 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (SU Mode)	5955	6+5	5.925000	-40.67	Pk	35.3	11.8	0.00	-34.74	-28.31	-	-	-7	-21.31	91	139	H
			5.924735	-38.48	Pk	35.3	11.8	0.00	-34.73	-26.11	-	-	-7	-19.11	91	139	H
			5.925000	-56.47	RMS	35.3	11.8	0.00	-34.74	-44.11	-27	-17.11	-	-	91	139	H
			5.924735	-55.64	RMS	35.3	11.8	0.00	-34.73	-43.27	-27	-16.27	-	-	91	139	H
			5.925000	-38.92	Pk	35.3	11.8	0.00	-34.74	-26.56	-	-	-7	-19.56	5	143	V
			5.924468	-38.15	Pk	35.3	11.8	0.00	-34.73	-25.78	-	-	-7	-18.78	5	143	V
			5.925000	-54.48	RMS	35.3	11.8	0.00	-34.74	-42.12	-27	-15.12	-	-	5	143	V
			5.924868	-54.64	RMS	35.3	11.8	0.00	-34.74	-42.28	-27	-15.28	-	-	5	143	V
EHT40 (SU Mode)	5965	6+5	5.925000	-30.89	Pk	35.1	11.8	0.00	-34.36	-18.35	-	-	-7	-11.35	42	177	H
			5.924868	-30.56	Pk	35.1	11.8	0.00	-34.36	-18.02	-	-	-7	-11.02	42	177	H
			5.925000	-48.09	RMS	35.1	11.8	0.00	-34.36	-35.55	-27	-8.55	-	-	42	177	H
			5.924935	-47.20	RMS	35.1	11.8	0.00	-34.36	-34.66	-27	-7.66	-	-	42	177	H
			5.925000	-32.71	Pk	35.1	11.8	0.00	-34.36	-20.17	-	-	-7	-13.17	291	181	V
			5.923735	-27.98	Pk	35.1	11.8	0.00	-34.36	-15.44	-	-	-7	-8.44	291	181	V
			5.925000	-47.26	RMS	35.1	11.8	0.00	-34.36	-34.72	-27	-7.72	-	-	291	181	V
			5.924335	-45.65	RMS	35.1	11.8	0.00	-34.36	-33.11	-27	-6.11	-	-	291	181	V
EHT80 (SU Mode)	5985	6+5	5.925000	-28.92	Pk	35.1	11.8	0.00	-34.36	-16.38	-	-	-7	-9.38	46	166	H
			5.920535	-27.45	Pk	35.1	11.8	0.00	-34.36	-14.91	-	-	-7	-7.91	46	166	H
			5.925000	-45.31	RMS	35.1	11.8	0.00	-34.36	-32.77	-27	-5.77	-	-	46	166	H
			5.921335	-44.64	RMS	35.1	11.8	0.00	-34.36	-32.10	-27	-5.10	-	-	46	166	H
			5.925000	-30.89	Pk	35.1	11.8	0.00	-34.36	-18.35	-	-	-7	-11.35	321	175	V
			5.920668	-26.63	Pk	35.1	11.8	0.00	-34.36	-14.09	-	-	-7	-7.09	321	175	V
			5.925000	-45.78	RMS	35.1	11.8	0.00	-34.36	-33.24	-27	-6.24	-	-	321	175	V
			5.921335	-43.69	RMS	35.1	11.8	0.00	-34.36	-31.15	-27	-4.15	-	-	321	175	V
EHT160 (SU Mode)	6025	6+5	5.900801	-24.38	Pk	35.1	11.8	0.00	-36.40	-13.88	-	-	-7	-6.88	91	118	H
			5.915135	-43.15	RMS	35.2	11.8	0.14	-36.30	-32.31	-27	-5.31	-	-	91	118	H
			5.925000	-31.12	Pk	35.2	11.8	0.00	-36.20	-20.32	-	-	-7	-13.32	91	118	H
			5.925000	-43.75	RMS	35.2	11.8	0.14	-36.20	-32.81	-27	-5.81	-	-	91	118	H
			5.900401	-22.40	Pk	35.1	11.8	0.00	-36.40	-11.90	-	-	-7	-4.90	0	167	V
			5.920201	-40.70	RMS	35.2	11.8	0.14	-36.28	-29.84	-27	-2.84	-	-	0	167	V
			5.925000	-27.84	Pk	35.2	11.8	0.00	-36.20	-17.04	-	-	-7	-10.04	0	167	V
			5.925000	-41.27	RMS	35.2	11.8	0.14	-36.20	-30.33	-27	-3.33	-	-	0	167	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.4. 802.11be MIMO PARTIAL RU MODE IN UNII-5 BAND - BANDEDGE**STATE A**

UNII-5 (MIMO CDD)	Channel Frequency MHz	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading ERP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (26T RU0)	5955	6+5	5.925000	-52.31	Pk	35.3	11.8	0.00	-34.74	-39.95	-	-	-7	-32.95	36	174	H
			5.878668	-49.02	Pk	35.2	11.8	0.00	-34.90	-36.92	-	-	-7	-29.92	36	174	H
			5.925000	-61.41	RMS	35.3	11.8	0.00	-34.74	-49.05	-27	-22.05	-	-	36	174	H
			5.768334	-60.77	RMS	35.1	11.8	0.00	-35.04	-48.91	-27	-21.91	-	-	36	174	H
			5.925000	-49.85	Pk	35.3	11.8	0.00	-34.74	-37.49	-	-	-7	-30.49	1	116	V
			5.910868	-48.76	Pk	35.2	11.8	0.00	-34.81	-36.57	-	-	-7	-29.57	1	116	V
			5.925000	-61.64	RMS	35.3	11.8	0.00	-34.74	-49.28	-27	-22.28	-	-	1	116	V
			5.924402	-61.12	RMS	35.3	11.8	0.00	-34.73	-48.75	-27	-21.75	-	-	1	116	V
EHT20 (52+26T RU70)	5955	6+5	5.925000	-50.95	Pk	35.3	11.8	0.00	-34.74	-38.59	-	-	-7	-31.59	37	174	H
			5.850001	-49.07	Pk	35.1	11.8	0.00	-34.85	-37.02	-	-	-7	-30.02	37	174	H
			5.925000	-62.42	RMS	35.3	11.8	0.00	-34.74	-50.06	-27	-23.06	-	-	37	174	H
			5.853934	-61.00	RMS	35.2	11.8	0.00	-34.86	-48.86	-27	-21.86	-	-	37	174	H
			5.925000	-50.71	Pk	35.3	11.8	0.00	-34.74	-38.35	-	-	-7	-31.35	1	117	V
			5.847934	-48.63	Pk	35.1	11.8	0.00	-34.86	-36.59	-	-	-7	-29.59	1	117	V
			5.925000	-61.59	RMS	35.3	11.8	0.00	-34.74	-49.23	-27	-22.23	-	-	1	117	V
			5.916068	-60.84	RMS	35.2	11.8	0.00	-34.78	-48.62	-27	-21.62	-	-	1	117	V
EHT80 (484+242T RU93)	5985	6+5	5.925000	-33.13	Pk	35.2	11.8	0.00	-36.40	-22.53	-	-	-7	-15.53	28	333	H
			5.924735	-33.04	Pk	35.2	11.8	0.00	-36.40	-22.44	-	-	-7	-15.44	28	333	H
			5.925000	-54.40	RMS	35.2	11.8	0.00	-36.40	-43.80	-27	-16.80	-	-	28	333	H
			5.921801	-54.19	RMS	35.2	11.8	0.00	-36.30	-43.49	-27	-16.49	-	-	28	333	H
			5.925000	-28.65	Pk	35.2	11.8	0.00	-36.40	-18.05	-	-	-7	-11.05	2	128	V
			5.924802	-28.72	Pk	35.2	11.8	0.00	-36.40	-18.12	-	-	-7	-11.12	2	128	V
			5.925000	-51.07	RMS	35.2	11.8	0.00	-36.40	-40.47	-27	-13.47	-	-	2	128	V
			5.924802	-48.59	RMS	35.2	11.8	0.00	-36.40	-37.99	-27	-10.99	-	-	2	128	V
EHT160 (996+484T S95)	6025	6+5	5.925000	-47.93	Pk	35.2	11.8	0.00	-23.48	-24.41	-	-	-7	-17.41	222	202	H
			5.870068	-44.24	Pk	35.1	11.8	0.00	-23.46	-20.80	-	-	-7	-13.8	222	202	H
			5.925000	-63.58	RMS	35.2	11.8	0.00	-23.48	-40.06	-27	-13.06	-	-	222	202	H
			5.920068	-62.50	RMS	35.2	11.8	0.00	-23.55	-39.05	-27	-12.05	-	-	222	202	H
			5.925000	-48.62	Pk	35.2	11.8	0.00	-23.48	-25.10	-	-	-7	-18.1	206	150	V
			5.870935	-42.34	Pk	35.1	11.8	0.00	-23.49	-18.93	-	-	-7	-11.93	206	150	V
			5.925000	-63.46	RMS	35.2	11.8	0.00	-23.48	-39.94	-27	-12.94	-	-	206	150	V
			5.920801	-60.80	RMS	35.2	11.8	0.00	-23.51	-37.31	-27	-10.31	-	-	206	150	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection


STATE B

UNII-5 (MIMO CDD)	Channel Frequency MHz	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (26T RU0)	5955	6+5	5.925	-59.67	Pk	35.2	11.8	0.00	-23.48	-36.15	-	-	-7	-29.15	212	186	V
			5.924868	-58.91	Pk	35.2	11.8	0.00	-23.48	-35.39	-	-	-7	-28.39	212	186	V
			5.925	-73.17	RMS	35.2	11.8	0.00	-23.48	-49.65	-27	-22.65	-	-	212	186	V
			5.923468	-72.62	RMS	35.2	11.8	0.00	-23.49	-49.11	-27	-22.11	-	-	212	186	V
			5.925	-63.53	Pk	35.2	11.8	0.00	-23.48	-40.01	-	-	-7	-33.01	256	235	H
			5.897535	-61.06	Pk	35.2	11.8	0.00	-23.42	-37.48	-	-	-7	-30.48	256	235	H
			5.925	-72.7	RMS	35.2	11.8	0.00	-23.48	-49.18	-27	-22.18	-	-	256	235	H
			5.905801	-72.51	RMS	35.2	11.8	0.00	-23.45	-48.96	-27	-21.96	-	-	256	235	H
EHT20 (52+26T RU70)	5955	6+5	5.925000	-62.98	Pk	35.2	11.8	0.00	-23.48	-39.46	-	-	-7	-32.46	256	235	H
			5.883135	-60.72	Pk	35.1	11.8	0.00	-23.36	-37.18	-	-	-7	-30.18	256	235	H
			5.925000	-73.55	RMS	35.2	11.8	0.00	-23.48	-50.03	-27	-23.03	-	-	256	235	H
			5.920068	-72.61	RMS	35.2	11.8	0.00	-23.55	-49.16	-27	-22.16	-	-	256	235	H
			5.925000	-62.57	Pk	35.2	11.8	0.00	-23.48	-39.05	-	-	-7	-32.05	212	186	V
			5.891935	-60.89	Pk	35.2	11.8	0.00	-23.41	-37.30	-	-	-7	-30.30	212	186	V
			5.925000	-73.25	RMS	35.2	11.8	0.00	-23.48	-49.73	-27	-22.73	-	-	212	186	V
			5.871868	-72.14	RMS	35.1	11.8	0.00	-23.46	-48.70	-27	-21.70	-	-	212	186	V
EHT80 (484+242T RU93)	5985	6+5	5.925000	-36.93	Pk	35.1	11.8	0.00	-34.36	-24.39	-	-	-7	-17.39	37	189	H
			5.924935	-36.75	Pk	35.1	11.8	0.00	-34.36	-24.21	-	-	-7	-17.21	37	189	H
			5.925000	-57.13	RMS	35.1	11.8	0.00	-34.36	-44.59	-27	-17.59	-	-	37	189	H
			5.920468	-56.83	RMS	35.1	11.8	0.00	-34.36	-44.29	-27	-17.29	-	-	37	189	H
			5.925000	-42.22	Pk	35.1	11.8	0.00	-34.36	-29.68	-	-	-7	-22.68	310	135	V
			5.924735	-36.34	Pk	35.1	11.8	0.00	-34.36	-23.80	-	-	-7	-16.80	310	135	V
			5.925000	-57.35	RMS	35.1	11.8	0.00	-34.36	-44.81	-27	-17.81	-	-	310	135	V
			5.924535	-56.58	RMS	35.1	11.8	0.00	-34.36	-44.04	-27	-17.04	-	-	310	135	V
EHT160 (996+484T S95)	6025	6+5	5.925000	-35.96	Pk	35.6	11.8	0.00	-36.66	-25.22	-	-	-7	-18.22	38	199	H
			5.870201	-29.91	Pk	35.3	11.8	0.00	-36.64	-19.45	-	-	-7	-12.45	38	199	H
			5.925000	-50.28	RMS	35.6	11.8	0.00	-36.66	-39.54	-27	-12.54	-	-	38	199	H
			5.915535	-49.17	RMS	35.6	11.8	0.00	-36.69	-38.46	-27	-11.46	-	-	38	199	H
			5.925000	-33.72	Pk	35.6	11.8	0.00	-36.66	-22.98	-	-	-7	-15.98	322	177	V
			5.871401	-29.22	Pk	35.3	11.8	0.00	-36.64	-18.76	-	-	-7	-11.76	322	177	V
			5.925000	-49.17	RMS	35.6	11.8	0.00	-36.66	-38.43	-27	-11.43	-	-	322	177	V
			5.921268	-47.55	RMS	35.6	11.8	0.00	-36.69	-36.84	-27	-9.84	-	-	322	177	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

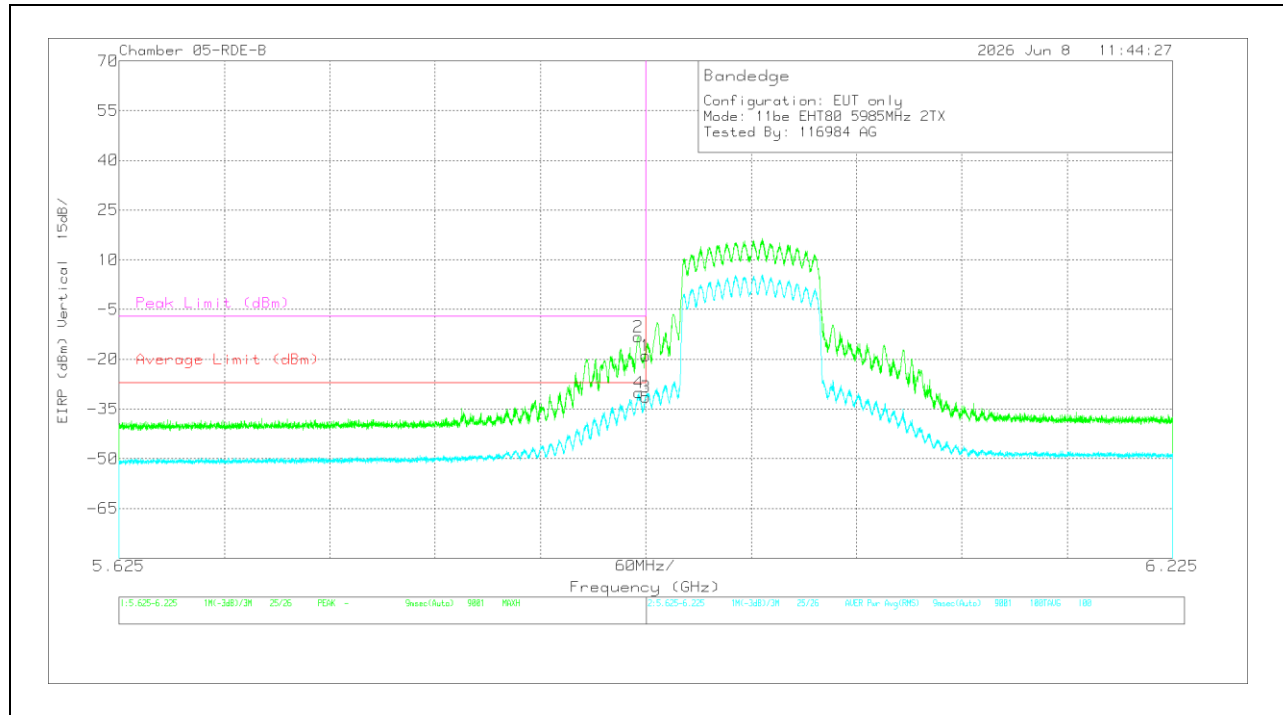WORST-CASE BANDEDGE (LOW CHANNEL)**STATE A****802.11be EHT80 / 5985MHz / 2TX CDD / SU:****VERTICAL RESULT**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)
1	5.925000	-29.54	Pk	35.2	11.8	0.00	-36.40	-18.94	-	-	-7	-11.94	3	128
2	5.920668	-23.99	Pk	35.2	11.8	0.00	-36.30	-13.29	-	-	-7	-6.29	3	128
3	5.925000	-42.07	RMS	35.2	11.8	0.00	-36.40	-31.47	-27	-4.47	-	-	3	128
4	5.920868	-40.80	RMS	35.2	11.8	0.00	-36.30	-30.10	-27	-3.10	-	-	3	128


Pk - Peak detector

RMS - RMS detection

STATE B

802.11be EHT160 / 6025MHz / 2TX CDD / SU:

VERTICAL RESULT

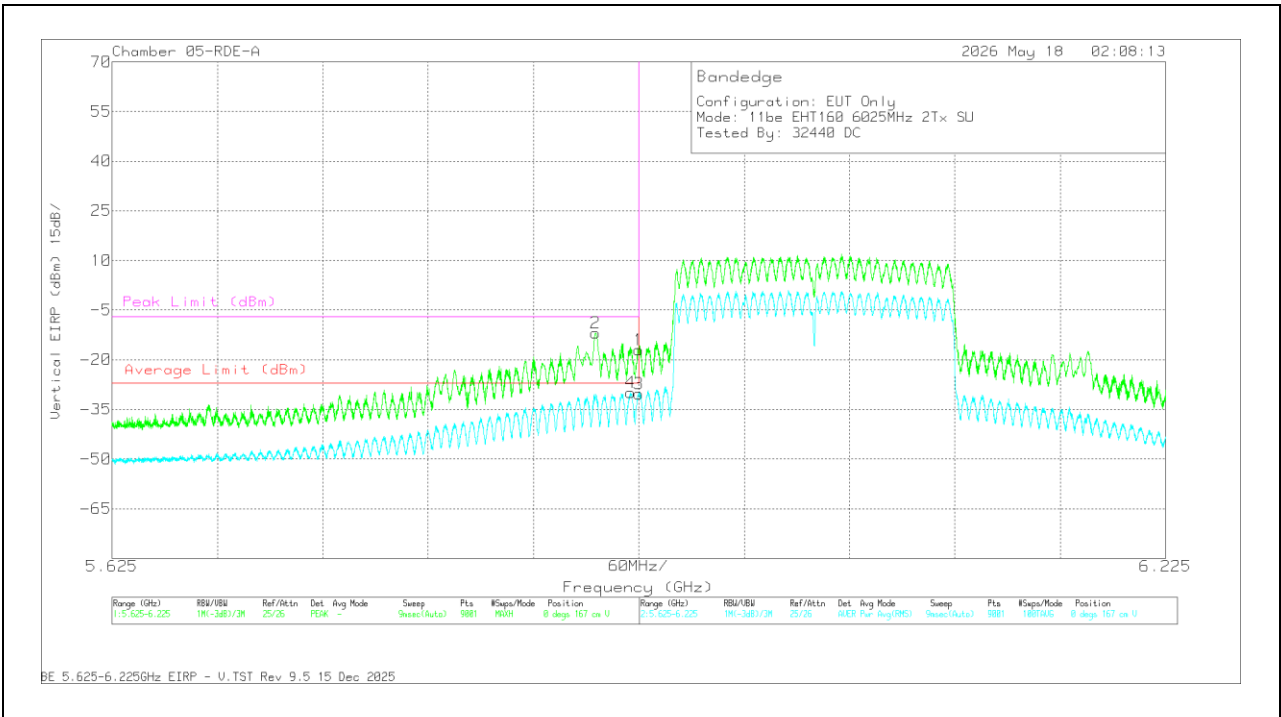

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)
2	5.900401	-22.40	Pk	35.1	11.8	0.00	-36.40	-11.90	-	-	-7	-4.90	0	167
4	5.920201	-40.70	RMS	35.2	11.8	0.14	-36.28	-29.84	-27	-2.84	-	-	0	167
1	5.925000	-27.84	Pk	35.2	11.8	0.00	-36.20	-17.04	-	-	-7	-10.04	0	167
3	5.925000	-41.27	RMS	35.2	11.8	0.14	-36.20	-30.33	-27	-3.33	-	-	0	167

Pk - Peak detector
RMS - RMS detection

1.1.5. 802.11be MIMO MODE IN UNII-5 BAND – SPURIOUS EMISSIONS**STATE A 20MHz**

UNII-5 (MIMO CDD)	Channel Frequency MHz	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbt/FI tr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity	
EHT20 (SU Mode)	5955	6+5	* 2.222612	61.18	PK-U	31.5	0.00	-50.24	42.44	-	-	74	-31.56	319	101	H	
			* 2.238042	49.64	ADR	31.5	0.00	-49.90	31.24	54	-22.76	-	-	319	101	V	
			* 2.249316	49.54	ADR	31.5	0.00	-50.04	31.00	54	-23	-	-	319	101	H	
			* 2.250876	61.46	PK-U	31.5	0.00	-50.08	42.88	-	-	74	-31.12	319	101	V	
			* 4.007524	58.99	PK-U	33.5	0.00	-47.91	44.58	-	-	74	-29.42	319	101	H	
			* 4.007720	47.23	ADR	33.5	0.00	-47.99	32.74	54	-21.26	-	-	319	101	V	
			* 4.009253	47.32	ADR	33.5	0.00	-48.00	32.82	54	-21.18	-	-	319	101	H	
			* 4.018145	58.51	PK-U	33.5	0.00	-48.27	43.74	-	-	74	-30.26	319	101	V	
			* 11.119321	45.91	ADR	37.9	0.00	-44.70	39.11	54	-14.89	-	-	319	101	H	
			* 11.128880	57.59	PK-U	37.9	0.00	-44.70	50.79	-	-	74	-23.21	319	101	H	
			* 11.137579	57.57	PK-U	37.9	0.00	-44.68	50.79	-	-	74	-23.21	319	101	V	
			* 11.144122	46.07	ADR	37.9	0.00	-45.02	38.95	54	-15.05	-	-	319	101	V	
	6175		* 2.243001	61.88	PK-U	31.5	0.00	-49.90	43.48	-	-	74	-30.52	0	101	V	
			* 2.252631	49.57	ADR	31.5	0.00	-49.91	31.16	54	-22.84	-	-	0	101	H	
			* 2.253573	49.73	ADR	31.5	0.00	-50.09	31.14	54	-22.86	-	-	0	101	V	
			* 2.261403	61.78	PK-U	31.5	0.00	-50.04	43.24	-	-	74	-30.76	0	101	H	
			* 3.995469	58.62	PK-U	33.5	0.00	-48.27	43.85	-	-	74	-30.15	0	101	H	
			* 3.998839	58.84	PK-U	33.5	0.00	-47.78	44.56	-	-	74	-29.44	0	101	V	
			* 4.002412	47.39	ADR	33.5	0.00	-47.68	33.21	54	-20.79	-	-	0	101	V	
			* 4.010032	47.42	ADR	33.5	0.00	-48.00	32.92	54	-21.08	-	-	0	101	H	
			* 11.111165	46.06	ADR	37.9	0.00	-44.73	39.23	54	-14.77	-	-	0	101	V	
			* 11.116881	45.92	ADR	37.9	0.00	-44.71	39.11	54	-14.89	-	-	0	101	H	
			* 11.121684	57.74	PK-U	37.9	0.00	-44.54	51.10	-	-	74	-22.9	0	101	H	
			* 11.143982	58.04	PK-U	37.9	0.00	-44.99	50.95	-	-	74	-23.05	0	101	V	
	6415	* 2.245092	49.77	ADR	31.5	0.00	-49.91	31.36	54	-22.64	-	-	0	101	H		
		* 2.254524	49.96	ADR	31.5	0.00	-50.09	31.37	54	-22.63	-	-	0	101	V		
		* 2.260184	61.46	PK-U	31.5	0.00	-50.00	42.96	-	-	74	-31.04	0	101	H		
		* 2.265687	61.43	PK-U	31.5	0.00	-49.79	43.14	-	-	74	-30.86	0	101	V		
		* 3.767057	58.76	PK-U	33.4	0.00	-48.10	44.06	-	-	74	-29.94	0	101	V		
		* 3.772125	58.82	PK-U	33.4	0.00	-48.07	44.15	-	-	74	-29.85	0	101	H		
		* 3.773020	47.21	ADR	33.4	0.00	-47.90	32.71	54	-21.29	-	-	0	101	V		
		* 3.784519	47.07	ADR	33.4	0.00	-47.85	32.62	54	-21.38	-	-	0	101	H		
		* 11.072631	58.60	PK-U	37.9	0.00	-44.91	51.59	-	-	74	-22.41	0	101	V		
		* 11.083254	46.51	ADR	37.9	0.00	-44.35	40.06	54	-13.94	-	-	0	101	H		
		* 11.085074	46.49	ADR	37.9	0.00	-44.59	39.80	54	-14.2	-	-	0	101	V		
		* 11.089458	58.27	PK-U	37.9	0.00	-44.26	51.91	-	-	74	-22.09	0	101	H		
	EHT20 (26T RU0)	5955	6+5	2.972917	59.35	PK-U	32.8	0.00	-48.09	44.06	-	-	88.2	-44.14	0	101	H
				2.982760	47.81	ADR	32.8	0.00	-48.10	32.51	68.2	-35.69	-	-	0	101	H
				2.993937	60.06	PK-U	32.8	0.00	-48.09	44.77	-	-	88.2	-43.43	0	101	V
				2.973517	47.87	ADR	32.8	0.00	-48.05	32.62	68.2	-35.58	-	-	0	101	V
				* 11.892909	54.17	PK-U	38.9	0.00	-43.20	49.87	-	-	74	-24.13	0	101	H
				* 11.876007	42.48	ADR	38.9	0.00	-43.10	38.28	54	-15.72	-	-	0	101	H
				* 17.888350	52.37	PK-U	41.5	0.00	-38.20	55.67	-	-	74	-18.33	0	101	H
				* 17.896054	40.59	ADR	41.5	0.00	-38.20	43.89	54	-10.11	-	-	0	101	H
				* 11.903725	54.21	PK-U	38.9	0.00	-43.07	50.04	-	-	74	-23.96	0	101	V
				* 11.895554	42.54	ADR	38.9	0.00	-43.10	38.34	54	-15.66	-	-	0	101	V
				* 17.922383	52.26	PK-U	41.5	0.00	-37.86	55.90	-	-	74	-18.1	0	101	V
				* 17.888554	40.74	ADR	41.5	0.00	-38.20	44.04	54	-9.96	-	-	0	101	V
EHT20 (26T RU4)	6175	6+5	3.080031	58.77	PK-U	33.1	0.00	-47.60	44.27	-	-	88.2	-43.93	0	199	H	
			3.084168	47.02	ADR	33.1	0.00	-47.60	32.52	68.2	-35.68	-	-	0	199	H	
			3.099026	58.88	PK-U	33.1	0.00	-47.50	44.48	-	-	88.2	-43.72	0	101	V	
			3.073371	46.84	ADR	33.1	0.00	-47.70	32.24	68.2	-35.96	-	-	0	101	V	
			* 12.334219	53.80	PK-U	38.8	0.00	-42.60	50.00	-	-	74	-24	0	199	H	
			* 12.311913	42.08	ADR	38.8	0.00	-42.40	38.48	54	-15.52	-	-	0	199	H	
			* 17.948991	52.41	PK-U	41.5	0.00	-37.70	56.21	-	-	74	-17.79	0	199	H	
			* 17.985240	40.41	ADR	41.5	0.00	-38.20	43.71	54	-10.29	-	-	0	199	H	
			* 12.369985	52.99	PK-U	38.7	0.00	-42.40	49.29	-	-	74	-24.71	0	199	V	
			* 12.352423	41.62	ADR	38.7	0.00	-42.30	38.02	54	-15.98	-	-	0	199	V	
			* 17.956918	51.96	PK-U	41.5	0.00	-37.70	55.76	-	-	74	-18.24	0	199	V	
			EHT20 (26T RU8)	6415	6+5	* 17.958522	40.55	ADR	41.5	0.00	-37.65	44.40	54	-9.6	-	-	0
3.204787	58.07	PK-U				32.8	0.00	-47.40	43.47	-	-	88.2	-44.73	0	199	H	
3.208609	46.36	ADR				32.8	0.00	-47.30	31.86	68.2	-36.34	-	-	0	199	H	
3.206665	57.99	PK-U				32.8	0.00	-47.40	43.39	-	-	88.2	-44.81	0	199	V	
3.205048	46.65	ADR				32.8	0.00	-47.40	32.05	68.2	-36.15	-	-	0	199	V	
12.824622	52.93	PK-U				39.1	0.00	-42.44	49.59	-	-	88.2	-38.61	0	199	H	
12.820687	41.38	ADR				39.1	0.00	-42.50	37.98	68.2	-30.22	-	-	0	199	H	
17.663325	52.02	PK-U				41.4	0.00	-38.70	54.72	-	-	88.2	-33.48	0	199	H	
17.653434	40.36	ADR				41.5	0.00	-38.80	43.06	68.2	-25.14	-	-	0	199	H	
12.819748	53.04	PK-U				39.1	0.00	-42.50	49.64	-	-	88.2	-38.56	0	101	V	
12.820316	41.14	ADR				39.1	0.00	-42.50	37.74	68.2	-30.46	-	-	0	101	V	
17.653642	51.67	PK-U				41.5	0.00	-38.80	54.37	-	-	88.2	-33.83	0	101	V	
17.658153	40.35	ADR	41.5	0.00	-38.70	43.15	68.2	-25.05	-	-	0	101	V				

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

STATE A 20MHz- Cont.

UNII-5 (MIMO CDD)	Channel Frequency MHz	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cb/ Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (52+26T RU70)	5955	6+5	* 8.454833	56.09	PK-U	35.8	0.00	-43.80	48.09	-	-	74	-25.91	0	101	H
			* 8.453241	43.89	ADR	35.8	0.00	-43.80	35.89	54	-18.11	-	-	0	101	H
			* 8.426476	55.48	PK-U	35.8	0.00	-43.70	47.58	-	-	74	-26.42	0	101	V
			* 8.456293	43.96	ADR	35.8	0.00	-43.80	35.96	54	-18.04	-	-	0	101	V
			1.981977	61.85	PK-U	30.9	0.00	-48.70	44.05	-	-	88.2	-44.15	0	101	H
			1.985132	49.84	ADR	30.9	0.00	-48.69	32.05	68.2	-36.15	-	-	0	101	H
			1.987997	61.34	PK-U	30.9	0.00	-48.60	43.64	-	-	88.2	-44.56	0	101	V
			1.995521	49.82	ADR	31.0	0.00	-48.50	32.32	68.2	-35.88	-	-	0	101	V
			2.957106	47.73	ADR	32.7	0.00	-47.79	32.64	68.2	-35.56	-	-	0	101	V
			2.958017	59.09	PK-U	32.7	0.00	-47.70	44.09	-	-	88.2	-44.11	0	101	V
			2.958920	59.05	PK-U	32.7	0.00	-47.79	43.96	-	-	88.2	-44.24	0	101	H
			2.961031	47.45	ADR	32.7	0.00	-47.60	32.55	68.2	-35.65	-	-	0	101	H
			* 12.359102	55.08	PK-U	38.8	0.00	-41.71	52.17	-	-	74	-21.83	0	101	H
			* 12.365617	43.15	ADR	38.9	0.00	-41.70	40.35	54	-13.65	-	-	0	101	H
EHT20 (52+26T RU71)	6175	6+5	* 12.359830	54.69	PK-U	38.9	0.00	-41.78	51.81	-	-	74	-22.19	0	101	V
			* 12.355910	43.09	ADR	38.9	0.00	-41.60	40.39	54	-13.61	-	-	0	101	V
			2.039043	49.24	ADR	30.9	0.00	-48.90	31.24	68.2	-36.96	-	-	0	101	V
			2.040385	60.73	PK-U	30.9	0.00	-49.00	42.63	-	-	88.2	-45.57	0	101	V
			2.041162	49.34	ADR	31.0	0.00	-49.00	31.34	68.2	-36.86	-	-	0	101	H
			2.048326	60.54	PK-U	31.1	0.00	-49.00	42.64	-	-	88.2	-45.56	0	101	H
			3.089630	58.75	PK-U	33.1	0.00	-47.60	44.25	-	-	88.2	-43.95	0	101	V
			3.100402	47.16	ADR	33.1	0.00	-47.64	32.62	68.2	-35.58	-	-	0	101	V
			3.101287	47.26	ADR	33.1	0.00	-47.70	32.66	68.2	-35.54	-	-	0	101	H
			3.105478	59.18	PK-U	33.1	0.00	-47.60	44.68	-	-	88.2	-43.52	0	101	H
			2.130751	61.75	PK-U	31.3	0.00	-49.30	43.75	-	-	88.2	-44.45	2	101	V
			2.133032	61.71	PK-U	31.3	0.00	-49.30	43.71	-	-	88.2	-44.49	2	101	H
EHT20 (52+26T RU72)	6415	6+5	2.135235	50.15	ADR	31.2	0.00	-49.30	32.05	68.2	-36.15	-	-	2	101	V
			2.140120	50.18	ADR	31.2	0.00	-49.20	32.18	68.2	-36.02	-	-	2	101	H
			3.199352	58.18	PK-U	33.0	0.00	-46.84	44.34	-	-	88.2	-43.86	2	101	H
			3.199614	46.19	ADR	33.0	0.00	-46.86	32.33	68.2	-35.87	-	-	2	101	V
			3.203280	46.21	ADR	33.0	0.00	-46.80	32.41	68.2	-35.79	-	-	2	101	H
			3.204254	57.53	PK-U	33.0	0.00	-46.80	43.73	-	-	88.2	-44.47	2	101	V
			8.963057	55.54	PK-U	36.2	0.00	-43.09	48.65	-	-	88.2	-39.55	2	101	H
			8.965445	55.36	PK-U	36.2	0.00	-43.06	48.50	-	-	88.2	-39.7	2	101	V
			8.966028	43.80	ADR	36.2	0.00	-43.00	37.00	68.2	-31.2	-	-	2	101	V
			8.988394	43.75	ADR	36.2	0.00	-43.16	36.79	68.2	-31.41	-	-	2	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

STATE B 20MHz

UNII-5 (MIMO CDD)	Channel Frequency MHz	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbt/FI tr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity	
EHT20 (SU Mode)	5955	6+5	* 2.242744	49.85	ADR	31.5	0.00	-49.85	31.50	54	-22.5	-	-	360	101	H	
			* 2.250285	49.74	ADR	31.5	0.00	-49.96	31.28	54	-22.72	-	-	360	101	V	
			* 2.253009	61.31	PK-U	31.5	0.00	-49.80	43.01	-	-	74	-30.99	360	101	V	
			* 2.271794	61.36	PK-U	31.6	0.00	-50.10	42.86	-	-	74	-31.14	360	101	H	
			* 3.992193	59.02	PK-U	33.5	0.00	-48.24	44.28	-	-	74	-29.72	360	101	V	
			* 4.003914	47.19	ADR	33.5	0.00	-47.71	32.98	54	-21.02	-	-	360	101	H	
			* 4.008053	47.31	ADR	33.5	0.00	-48.09	32.72	54	-21.28	-	-	360	101	V	
			* 4.008891	59.06	PK-U	33.5	0.00	-48.01	44.55	-	-	74	-29.45	360	101	H	
			* 11.034989	46.91	ADR	37.8	0.00	-45.50	39.21	54	-14.79	-	-	360	101	V	
			* 11.036681	58.93	PK-U	37.8	0.00	-45.50	51.23	-	-	74	-22.77	360	101	V	
			* 11.037297	46.75	ADR	37.8	0.00	-45.50	39.05	54	-14.95	-	-	360	101	H	
			* 11.05184	58.18	PK-U	37.8	0.00	-45.38	50.60	-	-	74	-23.4	360	101	H	
	* 2.20314		49.60	ADR	31.4	0.00	-50.29	30.71	54	-23.29	-	-	0	101	H		
	* 2.204643		49.46	ADR	31.4	0.00	-50.01	30.85	54	-23.15	-	-	0	101	V		
	* 2.224441		61.14	PK-U	31.5	0.00	-50.06	42.58	-	-	74	-31.42	0	101	V		
	* 2.230137		61.60	PK-U	31.5	0.00	-50.01	43.09	-	-	74	-30.91	0	101	H		
	* 3.88502		57.98	PK-U	33.5	0.00	-47.50	43.98	-	-	74	-30.02	0	101	V		
	* 3.885833		46.11	ADR	33.5	0.00	-47.42	32.19	54	-21.81	-	-	0	101	V		
	* 3.891755		46.40	ADR	33.5	0.00	-47.32	32.58	54	-21.42	-	-	0	101	H		
	* 3.894657		57.70	PK-U	33.5	0.00	-47.30	43.90	-	-	74	-30.1	0	101	H		
	* 11.09133		46.39	ADR	37.9	0.00	-44.27	40.02	54	-13.98	-	-	0	101	V		
	* 11.098986		46.19	ADR	37.9	0.00	-44.40	39.69	54	-14.31	-	-	0	101	H		
	* 11.104065		58.13	PK-U	37.9	0.00	-44.39	51.64	-	-	74	-22.36	0	101	V		
	* 11.120491		57.72	PK-U	37.9	0.00	-44.55	51.07	-	-	74	-22.93	0	101	H		
	* 2.242501	49.61	ADR	31.5	0.00	-49.80	31.31	54	-22.69	-	-	0	101	V			
	* 2.253195	61.39	PK-U	31.5	0.00	-49.90	42.99	-	-	74	-31.01	0	101	H			
	* 2.253221	49.59	ADR	31.5	0.00	-49.91	31.18	54	-22.82	-	-	0	101	H			
	* 2.261099	61.36	PK-U	31.5	0.00	-50.01	42.85	-	-	74	-31.15	0	101	V			
	* 4.170873	47.21	ADR	33.5	0.00	-48.11	32.60	54	-21.4	-	-	0	101	H			
	* 4.174003	47.23	ADR	33.5	0.00	-47.80	32.93	54	-21.07	-	-	0	101	V			
	* 4.17431	59.00	PK-U	33.5	0.00	-47.80	44.70	-	-	74	-29.3	0	101	V			
	* 4.18156	58.44	PK-U	33.4	0.00	-48.07	43.77	-	-	74	-30.23	0	101	H			
	* 11.075535	58.64	PK-U	37.9	0.00	-44.60	51.94	-	-	74	-22.06	0	101	H			
	* 11.081695	46.64	ADR	37.9	0.00	-44.26	40.28	54	-13.72	-	-	0	101	H			
	* 11.082786	46.44	ADR	37.9	0.00	-44.36	39.98	54	-14.02	-	-	0	101	V			
	* 11.106736	58.39	PK-U	37.9	0.00	-44.35	51.94	-	-	74	-22.06	0	101	V			
	EHT20 (26T RU0)	5955	6+5	2.416550	61.27	PK-U	32.3	0.00	-47.29	46.28	-	-	88.2	-41.92	31	153	V
				2.418345	46.45	ADR	32.3	0.00	-47.28	31.47	68.2	-36.73	-	-	31	153	V
				2.421247	59.25	PK-U	32.3	0.00	-47.28	44.27	-	-	88.2	-43.93	360	101	H
				2.429303	46.46	ADR	32.3	0.00	-47.27	31.49	68.2	-36.71	-	-	360	101	H
* 11.951611				54.35	PK-U	38.8	0.00	-42.15	51.00	-	-	74	-23	31	200	H	
* 11.975997				42.13	ADR	38.8	0.00	-42.25	38.68	54	-15.32	-	-	31	200	H	
* 11.981269				54.40	PK-U	38.8	0.00	-42.17	51.03	-	-	74	-22.97	31	200	V	
* 11.989116				42.03	ADR	38.8	0.00	-42.14	38.69	54	-15.31	-	-	31	200	V	
* 15.922176				53.40	PK-U	40.7	0.00	-41.30	52.80	-	-	74	-21.2	31	101	V	
* 15.928267				53.48	PK-U	40.7	0.00	-41.21	52.97	-	-	74	-21.03	31	101	H	
* 15.929267				41.91	ADR	40.7	0.00	-41.18	41.43	54	-12.57	-	-	31	101	V	
* 15.930911				42.04	ADR	40.7	0.00	-41.14	41.60	54	-12.4	-	-	31	101	H	
EHT20 (26T RU4)	6175	6+5	1.891495	61.90	PK-U	31.2	0.00	-49.10	44.00	-	-	88.2	-44.2	360	101	H	
			1.890442	50.35	ADR	31.2	0.00	-49.10	32.45	68.2	-35.75	-	-	360	101	H	
			* 4.128420	57.67	PK-U	33.5	0.00	-47.20	43.97	-	-	74	-30.03	360	101	H	
			* 4.130825	46.09	ADR	33.6	0.00	-47.20	32.49	54	-21.51	-	-	360	101	H	
			1.887627	61.78	PK-U	31.2	0.00	-49.06	43.92	-	-	88.2	-44.28	360	200	V	
			1.895777	50.35	ADR	31.3	0.00	-49.10	32.55	68.2	-35.65	-	-	360	200	V	
			* 4.125331	57.65	PK-U	33.5	0.00	-47.10	44.05	-	-	74	-29.95	360	101	V	
			* 4.132112	46.24	ADR	33.6	0.00	-47.20	32.64	54	-21.36	-	-	360	101	V	
			14.062009	56.15	PK-U	39.1	0.00	-42.80	52.45	-	-	88.2	-35.75	360	200	H	
			14.072507	44.03	ADR	39.1	0.00	-42.75	40.38	68.2	-27.82	-	-	360	200	H	
			14.060821	55.66	PK-U	39.1	0.00	-42.80	51.96	-	-	88.2	-36.24	360	101	V	
			14.064936	43.99	ADR	39.1	0.00	-42.80	40.29	68.2	-27.91	-	-	360	101	V	
EHT20 (26T RU8)	6415	6+5	1.937996	62.14	PK-U	31.50	0.00	-49.10	44.54	-	-	88.2	-43.66	360	200	H	
			1.943742	50.56	ADR	31.50	0.00	-49.00	33.06	68.2	-35.14	-	-	360	200	H	
			* 4.832907	58.67	PK-U	34.20	0.00	-47.90	44.97	-	-	74	-29.03	360	200	H	
			* 4.816402	47.17	ADR	34.30	0.00	-47.80	33.67	54	-20.33	-	-	360	200	H	
			1.941045	62.45	PK-U	31.50	0.00	-49.00	44.95	-	-	88.2	-43.25	360	101	V	
			1.939947	50.66	ADR	31.50	0.00	-49.01	33.15	68.2	-35.05	-	-	360	101	V	
			* 4.832160	59.73	PK-U	34.20	0.00	-47.90	46.03	-	-	74	-27.97	360	200	V	
			* 4.838243	47.36	ADR	34.30	0.00	-47.82	33.84	54	-20.16	-	-	360	200	V	
			* 15.917232	53.43	PK-U	41.10	0.00	-41.20	53.33	-	-	74	-20.67	360	101	H	
			* 15.921759	42.18	ADR	41.10	0.00	-41.20	42.08	54	-11.92	-	-	360	101	H	
			* 15.909740	53.63	PK-U	41.10	0.00	-41.20	53.53	-	-	74	-20.47	360	200	V	
			* 15.919087	42.15	ADR	41.10	0.00	-41.20	42.05	54	-11.95	-	-	360	200	V	

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

STATE B 20MHz- Cont.

UNII-5 (MIMO CDD)	Channel Frequency MHz	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cb/ Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (52+26T RU70)	5955	6+5	* 1.135152	47.85	ADR	27.8	0.00	-47.81	27.84	54	-26.16	-	-	360	101	H
			* 1.135157	59.75	PK-U	27.8	0.00	-47.81	39.74	-	-	74	-34.26	360	101	V
			* 1.136739	59.37	PK-U	27.9	0.00	-47.83	39.44	-	-	74	-34.56	360	101	H
			* 1.139965	48.07	ADR	27.9	0.00	-47.86	28.11	54	-25.89	-	-	360	101	V
			* 12.279215	53.32	PK-U	38.9	0.00	-41.32	50.90	-	-	74	-23.1	360	101	V
			* 12.296721	41.72	ADR	38.9	0.00	-41.15	39.47	54	-14.53	-	-	360	101	V
			* 12.302053	41.74	ADR	38.9	0.00	-41.16	39.48	54	-14.52	-	-	360	101	H
			* 12.302225	54.00	PK-U	38.9	0.00	-41.16	51.74	-	-	74	-22.26	360	101	H
			* 3.838568	55.48	PK-U	33.4	0.00	-45.07	43.81	-	-	74	-30.19	360	101	H
			* 3.843671	55.52	PK-U	33.4	0.00	-45.13	43.79	-	-	74	-30.21	360	101	V
			* 3.845267	43.85	ADR	33.4	0.00	-45.09	32.16	54	-21.84	-	-	360	101	V
			* 3.851224	43.99	ADR	33.4	0.00	-44.91	32.48	54	-21.52	-	-	360	101	H
			* 1.135846	47.90	ADR	27.9	0.00	-47.82	27.98	54	-26.02	-	-	360	101	V
			* 1.137807	59.23	PK-U	27.9	0.00	-47.83	39.30	-	-	74	-34.7	360	101	H
EHT20 (52+26T RU71)	6175	6+5	* 1.140153	47.77	ADR	27.9	0.00	-47.86	27.81	54	-26.19	-	-	360	101	H
			* 1.141703	59.21	PK-U	28.0	0.00	-47.85	39.36	-	-	74	-34.64	360	101	V
			* 11.853132	54.24	PK-U	38.6	0.00	-42.33	50.51	-	-	74	-23.49	360	101	V
			* 11.857531	42.43	ADR	38.6	0.00	-42.41	38.62	54	-15.38	-	-	360	101	H
			* 11.864811	54.21	PK-U	38.7	0.00	-42.44	50.47	-	-	74	-23.53	360	101	H
			* 11.866214	42.35	ADR	38.7	0.00	-42.40	38.65	54	-15.35	-	-	360	101	V
			* 3.836682	43.93	ADR	33.4	0.00	-45.04	32.29	54	-21.71	-	-	360	101	V
			* 3.853126	43.92	ADR	33.5	0.00	-44.95	32.47	54	-21.53	-	-	360	101	H
			* 3.855739	55.50	PK-U	33.5	0.00	-44.99	44.01	-	-	74	-29.99	360	101	H
			* 3.860577	55.34	PK-U	33.5	0.00	-44.94	43.90	-	-	74	-30.1	360	101	V
			* 1.134832	47.95	ADR	27.8	0.00	-47.81	27.94	54	-26.06	-	-	360	101	V
			* 1.136481	59.08	PK-U	27.9	0.00	-47.82	39.16	-	-	74	-34.84	360	101	V
			* 1.137280	47.76	ADR	27.9	0.00	-47.83	27.83	54	-26.17	-	-	360	101	H
			* 1.138373	59.39	PK-U	27.9	0.00	-47.83	39.46	-	-	74	-34.54	360	101	H
EHT20 (52+26T RU72)	6415	6+5	* 11.813910	54.18	PK-U	38.6	0.00	-42.26	50.52	-	-	74	-23.48	360	101	V
			* 11.829725	54.30	PK-U	38.6	0.00	-41.96	50.94	-	-	74	-23.06	360	101	H
			* 11.842707	42.44	ADR	38.6	0.00	-42.06	38.98	54	-15.02	-	-	360	101	H
			* 11.843487	42.37	ADR	38.6	0.00	-42.07	38.90	54	-15.1	-	-	360	101	V
			* 3.853751	54.98	PK-U	33.5	0.00	-44.96	43.52	-	-	74	-30.48	360	101	V
			* 3.855474	55.20	PK-U	33.5	0.00	-44.98	43.72	-	-	74	-30.28	360	101	H
			* 3.858310	43.62	ADR	33.5	0.00	-45.00	32.12	54	-21.88	-	-	360	101	V
			* 3.858776	43.76	ADR	33.5	0.00	-45.00	32.26	54	-21.74	-	-	360	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

STATE A 40MHz

UNII-5 (MIMO CDD)	Channel Frequency MHz	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbt/ Fltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT40 (SU Mode)	5965	6+5	* 2.836146	48.47	ADR	32.5	0.00	-49.66	31.31	54	-22.69	-	-	360	101	H
			* 2.838869	60.11	PK-U	32.5	0.00	-49.96	42.65	-	-	74	-31.35	360	200	V
			* 2.839337	60.20	PK-U	32.5	0.00	-49.87	42.83	-	-	74	-31.17	360	101	H
			* 2.839754	48.58	ADR	32.5	0.00	-49.70	31.38	54	-22.62	-	-	360	200	V
			* 4.762937	47.81	ADR	34.2	0.00	-48.89	33.12	54	-20.88	-	-	360	101	H
			* 4.763466	60.05	PK-U	34.2	0.00	-48.99	45.26	-	-	74	-28.74	360	101	H
			* 4.764755	59.33	PK-U	34.2	0.00	-49.18	44.35	-	-	74	-29.65	360	101	H
			* 4.765233	59.35	PK-U	34.2	0.00	-49.15	44.40	-	-	74	-29.6	360	101	V
			* 4.766717	48.03	ADR	34.2	0.00	-49.07	33.16	54	-20.84	-	-	360	101	V
			* 4.767581	47.78	ADR	34.2	0.00	-48.93	33.05	54	-20.95	-	-	360	101	H
			* 15.763713	47.26	ADR	40.6	0.00	-45.59	42.27	54	-11.73	-	-	360	200	V
			* 15.775920	59.04	PK-U	40.6	0.00	-45.14	54.50	-	-	74	-19.5	360	101	H
			* 15.798521	59.61	PK-U	40.6	0.00	-45.70	54.51	-	-	74	-19.49	360	200	V
			* 15.804841	47.21	ADR	40.6	0.00	-45.40	42.41	54	-11.59	-	-	360	101	H
			* 2.237265	61.40	PK-U	31.5	0.00	-50.27	42.63	-	-	74	-31.37	360	200	V
	* 2.247398		61.50	PK-U	31.5	0.00	-50.30	42.70	-	-	74	-31.3	360	199	H	
	* 2.248736		49.72	ADR	31.5	0.00	-50.15	31.07	54	-22.93	-	-	360	199	H	
	* 2.252281		49.60	ADR	31.5	0.00	-50.02	31.08	54	-22.92	-	-	360	200	V	
	* 3.995968		59.07	PK-U	33.5	0.00	-48.02	44.55	-	-	74	-29.45	360	101	V	
	* 3.998773		47.28	ADR	33.5	0.00	-47.81	32.97	54	-21.03	-	-	360	101	H	
	* 3.999662		59.15	PK-U	33.5	0.00	-47.83	44.82	-	-	74	-29.18	360	101	H	
	* 4.004593		47.18	ADR	33.5	0.00	-47.82	32.86	54	-21.14	-	-	360	101	V	
	* 16.055637		59.44	PK-U	40.8	0.00	-45.67	54.57	-	-	74	-19.43	360	200	H	
	* 16.069685		47.65	ADR	40.8	0.00	-45.36	43.09	54	-10.91	-	-	360	200	V	
	* 16.070052		47.68	ADR	40.8	0.00	-45.24	43.24	54	-10.76	-	-	360	200	H	
	* 16.071536		59.17	PK-U	40.8	0.00	-45.79	54.18	-	-	74	-19.82	360	200	V	
	* 2.242484		61.57	PK-U	31.5	0.00	-49.80	43.27	-	-	74	-30.73	360	101	H	
	* 2.246011		49.51	ADR	31.5	0.00	-50.00	31.01	54	-22.99	-	-	360	101	V	
	* 2.246584		61.19	PK-U	31.5	0.00	-50.18	42.51	-	-	74	-31.49	360	101	V	
	* 2.260105		49.78	ADR	31.5	0.00	-50.00	31.28	54	-22.72	-	-	360	101	H	
	* 4.803523		60.05	PK-U	34.2	0.00	-49.15	45.10	-	-	74	-28.9	360	200	H	
	* 4.814997		48.14	ADR	34.1	0.00	-49.10	33.14	54	-20.86	-	-	360	200	H	
	* 4.818447		48.20	ADR	34.1	0.00	-49.10	33.20	54	-20.8	-	-	360	101	V	
	* 4.822606		59.69	PK-U	34.1	0.00	-48.84	44.95	-	-	74	-29.05	360	101	V	
	* 16.003465		47.50	ADR	40.8	0.00	-45.74	42.56	54	-11.44	-	-	360	199	H	
	* 16.008156		47.53	ADR	40.8	0.00	-45.58	42.75	54	-11.25	-	-	360	101	V	
	* 16.013479		59.55	PK-U	40.8	0.00	-45.80	54.55	-	-	74	-19.45	360	101	V	
	* 16.016307		59.29	PK-U	40.8	0.00	-45.78	54.31	-	-	74	-19.69	360	199	H	

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

STATE B 40MHz

UNII-5 (MIMO CDD)	Channel Frequency MHz	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbt/ Fltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity	
EHT40 (SU Mode)	5965	6+5	* 2.195900	49.60	ADR	31.4	0.00	-50.16	30.84	68.2	-37.36	-	-	360	101	H	
			* 2.200388	61.55	PK-U	31.4	0.00	-50.02	42.93	-	-	74	-31.07	360	101	H	
			* 2.205427	49.72	ADR	31.4	0.00	-49.90	31.22	54	-22.78	-	-	360	200	V	
			* 2.213769	61.73	PK-U	31.5	0.00	-50.03	43.20	-	-	74	-30.8	360	200	V	
			* 4.666833	47.85	ADR	34.2	0.00	-48.90	33.15	54	-20.85	-	-	360	101	V	
			* 4.667446	59.61	PK-U	34.2	0.00	-48.94	44.87	-	-	74	-29.13	360	101	V	
			* 4.668634	47.74	ADR	34.2	0.00	-48.94	33.00	54	-21	-	-	360	200	H	
			* 4.670020	59.97	PK-U	34.2	0.00	-49.10	45.07	-	-	74	-28.93	360	200	H	
			* 15.808134	59.32	PK-U	40.6	0.00	-45.49	54.43	-	-	74	-19.57	360	101	V	
			* 15.825157	47.57	ADR	40.6	0.00	-45.50	42.67	54	-11.33	-	-	360	101	V	
			* 15.827704	47.43	ADR	40.6	0.00	-45.47	42.56	54	-11.44	-	-	360	101	V	
			* 15.831560	59.32	PK-U	40.6	0.00	-45.21	54.71	-	-	74	-19.29	360	200	H	
			* 15.841391	59.09	PK-U	40.6	0.00	-45.46	54.23	-	-	74	-19.77	360	101	V	
			* 15.842063	47.35	ADR	40.6	0.00	-45.70	42.25	54	-11.75	-	-	360	200	H	
			* 2.214558	61.35	PK-U	31.5	0.00	-50.21	42.64	-	-	74	-31.36	360	101	V	
	6165		* 2.248479	49.61	ADR	31.5	0.00	-50.20	30.91	54	-23.09	-	-	360	101	V	
			* 2.252660	49.57	ADR	31.5	0.00	-49.90	31.17	54	-22.83	-	-	360	199	H	
			* 2.252927	61.54	PK-U	31.5	0.00	-49.82	43.22	-	-	74	-30.78	360	199	H	
			* 4.699835	59.66	PK-U	34.1	0.00	-49.05	44.71	-	-	74	-29.29	360	199	H	
			* 4.708190	47.80	ADR	34.1	0.00	-49.08	32.82	54	-21.18	-	-	360	199	H	
			* 4.713114	59.40	PK-U	34.1	0.00	-49.35	44.15	-	-	74	-29.85	360	101	V	
			* 4.722308	47.72	ADR	34.1	0.00	-49.10	32.72	54	-21.28	-	-	360	101	V	
			* 15.826081	47.58	ADR	40.6	0.00	-45.49	42.69	54	-11.31	-	-	360	101	H	
			* 15.838277	58.87	PK-U	40.6	0.00	-45.42	54.05	-	-	74	-19.95	360	200	V	
			* 15.840132	58.91	PK-U	40.6	0.00	-45.21	54.30	-	-	74	-19.7	360	101	H	
			* 15.858011	47.62	ADR	40.6	0.00	-45.80	42.42	54	-11.58	-	-	360	200	V	
			* 2.205756	49.61	ADR	31.4	0.00	-49.90	31.11	54	-22.89	-	-	360	200	H	
			* 2.235664	61.32	PK-U	31.5	0.00	-50.26	42.56	-	-	74	-31.44	360	200	H	
			6405	* 2.238876	49.46	ADR	31.5	0.00	-49.99	30.97	54	-23.03	-	-	360	101	V
				* 2.243774	61.14	PK-U	31.5	0.00	-49.82	42.82	-	-	74	-31.18	360	101	V
	* 4.764651			59.62	PK-U	34.2	0.00	-49.17	44.65	-	-	74	-29.35	360	101	H	
	* 4.777170			48.03	ADR	34.2	0.00	-49.00	33.23	54	-20.77	-	-	360	101	H	
	* 4.780263			48.03	ADR	34.2	0.00	-49.23	33.00	54	-21	-	-	360	101	V	
	* 4.784254			59.58	PK-U	34.2	0.00	-48.93	44.85	-	-	74	-29.15	360	101	V	
	* 15.797715			59.64	PK-U	40.6	0.00	-45.66	54.58	-	-	74	-19.42	360	101	V	
	* 15.813113			47.43	ADR	40.6	0.00	-45.09	42.94	54	-11.06	-	-	360	101	V	
	* 15.824204			60.03	PK-U	40.6	0.00	-45.18	55.45	-	-	74	-18.55	360	101	V	
	* 15.830661			47.38	ADR	40.6	0.00	-45.30	42.68	54	-11.32	-	-	360	199	H	
	* 15.830784			47.52	ADR	40.6	0.00	-45.23	42.89	54	-11.11	-	-	360	101	V	
	* 15.831488			58.96	PK-U	40.6	0.00	-45.20	54.36	-	-	74	-19.64	360	199	H	

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

STATE A 80MHz

UNII-5 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbl/ Filtr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity	
EHT80 (SU Mode)	5985	6+5	* 2.246840	49.61	ADR	31.5	0.00	-50.25	30.86	54	-23.14	-	-	360	101	V	
			* 2.247616	49.87	ADR	31.5	0.00	-50.30	31.07	54	-22.93	-	-	360	101	H	
			* 2.261818	61.42	PK-U	31.5	0.00	-50.08	42.84	-	-	74	-31.16	360	101	H	
			* 2.270877	61.54	PK-U	31.6	0.00	-50.11	43.03	-	-	74	-30.97	360	101	V	
			* 3.887996	46.31	ADR	33.5	0.00	-47.70	32.11	54	-21.89	-	-	360	101	H	
			* 3.889467	57.87	PK-U	33.5	0.00	-47.41	43.96	-	-	74	-30.04	360	101	H	
			* 3.890101	57.85	PK-U	33.5	0.00	-47.22	44.13	-	-	74	-29.87	360	101	V	
			* 3.894074	46.21	ADR	33.5	0.00	-47.30	32.41	54	-21.59	-	-	360	101	V	
			* 11.074295	46.44	ADR	37.9	0.00	-44.95	39.39	54	-14.61	-	-	360	101	V	
			* 11.074851	46.49	ADR	37.9	0.00	-44.67	39.72	54	-14.28	-	-	360	101	H	
			* 11.080527	58.38	PK-U	37.9	0.00	-44.35	51.93	-	-	74	-22.07	360	101	V	
			* 11.090349	58.53	PK-U	37.9	0.00	-44.17	52.26	-	-	74	-21.74	360	101	H	
			2.196859	49.61	ADR	31.4	0.00	-49.94	31.07	68.2	-37.13	-	-	360	101	V	
			2.196937	61.86	PK-U	31.4	0.00	-49.92	43.34	-	-	88.2	-44.86	360	200	H	
			* 2.201460	49.58	ADR	31.4	0.00	-49.90	31.08	54	-22.92	-	-	360	200	H	
			* 2.210640	61.44	PK-U	31.4	0.00	-50.18	42.66	-	-	74	-31.34	360	101	V	
	* 4.728982	59.22	PK-U	34.2	0.00	-49.00	44.42	-	-	74	-29.58	360	101	H			
	* 4.757206	60.00	PK-U	34.2	0.00	-49.00	45.20	-	-	74	-28.8	360	199	V			
	* 4.764800	47.79	ADR	34.2	0.00	-49.18	32.81	54	-21.19	-	-	360	101	H			
	* 4.767693	47.66	ADR	34.2	0.00	-48.89	32.97	54	-21.03	-	-	360	199	V			
	* 15.757873	59.02	PK-U	40.6	0.00	-45.51	54.11	-	-	74	-19.89	360	101	H			
	* 15.770599	47.26	ADR	40.6	0.00	-45.24	42.62	54	-11.38	-	-	360	101	H			
	* 15.781598	59.45	PK-U	40.6	0.00	-45.34	54.71	-	-	74	-19.29	360	101	V			
	* 15.783302	47.31	ADR	40.6	0.00	-45.33	42.58	54	-11.42	-	-	360	101	V			
	6385	6+5	* 2.230300	61.35	PK-U	31.5	0.00	-50.03	42.82	-	-	74	-31.18	360	200	H	
			* 2.245647	61.57	PK-U	31.5	0.00	-49.96	43.11	-	-	74	-30.89	360	200	V	
			* 2.247263	49.61	ADR	31.5	0.00	-50.30	30.81	54	-23.19	-	-	360	200	H	
			* 2.249451	49.60	ADR	31.5	0.00	-50.01	31.09	54	-22.91	-	-	360	200	V	
			* 4.780584	48.06	ADR	34.2	0.00	-49.26	33.00	54	-21	-	-	360	101	V	
			* 4.796516	60.23	PK-U	34.2	0.00	-49.10	45.33	-	-	74	-28.67	360	101	V	
			* 4.809606	59.81	PK-U	34.1	0.00	-49.06	44.85	-	-	74	-29.15	360	101	H	
			* 4.809704	47.91	ADR	34.1	0.00	-49.02	32.99	54	-21.01	-	-	360	101	H	
			* 15.933876	59.58	PK-U	40.7	0.00	-45.48	54.80	-	-	74	-19.2	360	101	H	
			* 15.950251	59.94	PK-U	40.7	0.00	-45.40	55.24	-	-	74	-18.76	360	101	V	
			* 15.955770	47.75	ADR	40.7	0.00	-45.35	43.10	54	-10.9	-	-	360	101	V	
			* 15.960914	47.65	ADR	40.7	0.00	-45.40	42.95	54	-11.05	-	-	360	101	H	
			2.053833	60.79	PK-U	32.0	0.00	-48.88	43.91	-	-	88.2	-44.29	0	101	H	
			2.053149	49.33	ADR	32.0	0.00	-48.81	32.52	68.2	-35.68	-	-	0	101	H	
			2.049989	60.82	PK-U	32.0	0.00	-48.90	43.92	-	-	88.2	-44.28	0	101	V	
			2.051087	49.35	ADR	32.0	0.00	-48.90	32.45	68.2	-35.75	-	-	0	101	V	
	EHT80 (484+242T RU90)	6385	6+5	10.068280	57.60	PK-U	37.4	0.00	-45.23	49.77	-	-	88.2	-38.43	0	101	H
				10.069916	44.42	ADR	37.4	0.00	-45.30	36.52	68.2	-31.68	-	-	0	101	H
				16.707820	54.57	PK-U	41.0	0.00	-41.40	54.17	-	-	88.2	-34.03	0	200	H
				16.704124	42.65	ADR	41.0	0.00	-41.30	42.35	68.2	-25.85	-	-	0	200	H
				10.067248	56.49	PK-U	37.4	0.00	-45.20	48.69	-	-	88.2	-39.51	0	200	V
10.069460				44.71	ADR	37.4	0.00	-45.30	36.81	68.2	-31.39	-	-	0	200	V	
16.705464				53.96	PK-U	41.0	0.00	-41.30	53.66	-	-	88.2	-34.54	0	101	V	
16.705784				42.54	ADR	41.0	0.00	-41.30	42.24	68.2	-25.96	-	-	0	101	V	
1.886542				61.57	PK-U	31.2	0.00	-49.00	43.77	-	-	88.2	-44.43	0	200	H	
1.889560				50.11	ADR	31.2	0.00	-49.10	32.21	68.2	-35.99	-	-	0	200	H	
1.893857				62.13	PK-U	31.3	0.00	-49.10	44.33	-	-	88.2	-43.87	0	200	V	
1.894981				50.28	ADR	31.3	0.00	-49.10	32.48	68.2	-35.72	-	-	0	200	V	
10.046965				56.76	PK-U	37.4	0.00	-45.10	49.06	-	-	88.2	-39.14	0	200	H	
10.051545				44.79	ADR	37.4	0.00	-45.10	37.09	68.2	-31.11	-	-	0	200	H	
16.871316				54.58	PK-U	41.2	0.00	-41.00	54.78	-	-	88.2	-33.42	0	101	H	
16.867080				42.46	ADR	41.2	0.00	-41.00	42.66	68.2	-25.54	-	-	0	101	H	
EHT80 (484+242T RU92)	6145	6+5	10.044966	56.61	PK-U	37.4	0.00	-45.20	48.81	-	-	88.2	-39.39	0	200	V	
			10.055936	44.76	ADR	37.4	0.00	-45.30	36.86	68.2	-31.34	-	-	0	200	V	
			16.871648	54.75	PK-U	41.2	0.00	-41.00	54.95	-	-	88.2	-33.25	0	101	V	
			16.878939	42.67	ADR	41.2	0.00	-41.00	42.87	68.2	-25.33	-	-	0	101	V	
			2.981048	59.47	PK-U	32.8	0.00	-48.10	44.17	-	-	88.2	-44.03	0	199	H	
			2.973929	47.68	ADR	32.8	0.00	-48.01	32.47	68.2	-35.73	-	-	0	199	H	
			2.992078	58.87	PK-U	32.8	0.00	-48.00	43.67	-	-	88.2	-44.53	0	101	V	
			2.994086	47.56	ADR	32.8	0.00	-48.09	32.27	68.2	-35.93	-	-	0	101	V	
			10.565924	55.77	PK-U	37.8	0.00	-44.81	48.76	-	-	88.2	-39.44	0	199	H	
			10.580522	44.49	ADR	37.8	0.00	-45.05	37.24	68.2	-30.96	-	-	0	199	H	
			17.688131	51.67	PK-U	41.4	0.00	-38.80	54.27	-	-	88.2	-33.93	0	101	H	
			17.657918	40.36	ADR	41.5	0.00	-38.71	43.15	68.2	-25.05	-	-	0	101	H	
			10.536270	55.70	PK-U	37.9	0.00	-44.97	48.63	-	-	88.2	-39.57	0	200	V	
			10.564323	44.41	ADR	37.8	0.00	-44.83	37.38	68.2	-30.82	-	-	0	200	V	
			17.667373	52.07	PK-U	41.4	0.00	-38.70	54.77	-	-	88.2	-33.43	0	200	V	
			17.670633	40.49	ADR	41.4	0.00	-38.70	43.19	68.2	-25.01	-	-	0	200	V	

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

STATE B 80MHz

UNII-5 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbl/ Filtr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity			
EHT80 (SU Mode)	5985	6+5	2.244359	61.58	PK-U	31.5	0.00	-49.84	43.24	-	-	74	-30.76	360	101	V			
			2.249601	49.56	ADR	31.5	0.00	-49.98	31.08	54	-22.92	-	-	360	101	H			
			2.251041	61.19	PK-U	31.5	0.00	-50.10	42.59	-	-	74	-31.41	360	101	H			
			2.251585	49.56	ADR	31.5	0.00	-50.10	30.96	54	-23.04	-	-	360	101	V			
			3.643683	58.29	PK-U	33.6	0.00	-47.87	44.02	-	-	74	-29.98	360	101	H			
			3.650180	46.58	ADR	33.6	0.00	-47.96	32.22	54	-21.78	-	-	360	101	H			
			3.661550	46.66	ADR	33.4	0.00	-47.86	32.20	54	-21.8	-	-	360	101	V			
			3.662124	58.39	PK-U	33.4	0.00	-47.92	43.87	-	-	74	-30.13	360	101	V			
			11.068487	46.53	ADR	37.9	0.00	-44.85	39.58	54	-14.42	-	-	360	101	H			
			11.071279	58.70	PK-U	37.9	0.00	-44.74	51.86	-	-	74	-22.14	360	101	H			
			11.072103	46.79	ADR	37.9	0.00	-45.07	39.62	54	-14.38	-	-	360	101	V			
			11.078862	58.56	PK-U	37.9	0.00	-44.43	52.03	-	-	74	-21.97	360	101	V			
	6145		2.229405	61.56	PK-U	31.5	0.00	-50.06	43.00	-	-	74	-31	360	101	V			
			2.246130	60.88	PK-U	31.5	0.00	-50.04	42.34	-	-	74	-31.66	360	101	H			
			2.250556	49.57	ADR	31.5	0.00	-50.01	31.06	54	-22.94	-	-	360	101	H			
			2.253007	49.91	ADR	31.5	0.00	-49.80	31.61	54	-22.39	-	-	360	101	V			
			4.651938	60.16	PK-U	34.2	0.00	-48.81	45.55	-	-	74	-28.45	360	199	V			
			4.664916	47.82	ADR	34.2	0.00	-48.82	33.20	54	-20.8	-	-	360	101	H			
			4.666955	59.63	PK-U	34.2	0.00	-48.90	44.93	-	-	74	-29.07	360	101	H			
			4.668550	47.67	ADR	34.2	0.00	-48.95	32.92	54	-21.08	-	-	360	199	V			
			15.894258	47.54	ADR	40.7	0.00	-45.85	42.39	54	-11.61	-	-	360	199	H			
			15.894562	59.37	PK-U	40.7	0.00	-45.91	54.16	-	-	74	-19.84	360	199	V			
			15.899173	59.36	PK-U	40.7	0.00	-45.98	54.08	-	-	74	-19.92	360	199	H			
			15.927883	47.37	ADR	40.7	0.00	-45.90	42.17	54	-11.83	-	-	360	199	V			
	6385		1.943293	62.08	PK-U	31.5	0.00	-50.21	43.37	-	-	88.2	-44.83	360	199	H			
			1.941871	50.68	ADR	31.5	0.00	-50.24	31.94	68.2	-36.26	-	-	360	199	H			
			1.943093	62.29	PK-U	31.5	0.00	-50.21	43.58	-	-	88.2	-44.62	360	199	V			
			1.949470	50.30	ADR	31.4	0.00	-50.19	31.51	68.2	-36.69	-	-	360	199	V			
			* 9.025325	56.47	PK-U	36.2	0.00	-44.89	47.78	-	-	74	-26.22	360	101	H			
			* 9.036343	44.56	ADR	36.2	0.00	-44.85	35.91	54	-18.09	-	-	360	101	H			
			* 17.725841	54.07	PK-U	41.5	0.00	-39.35	56.22	-	-	74	-17.78	360	101	H			
			* 17.731252	42.20	ADR	41.5	0.00	-39.55	44.15	54	-9.85	-	-	360	101	H			
			* 9.042860	56.56	PK-U	36.2	0.00	-44.98	47.78	-	-	74	-26.22	360	200	V			
			* 9.045771	44.63	ADR	36.2	0.00	-44.96	35.87	54	-18.13	-	-	360	200	V			
			* 17.728321	53.82	PK-U	41.5	0.00	-39.42	55.90	-	-	74	-18.1	360	101	V			
			* 17.731181	42.45	ADR	41.5	0.00	-39.54	44.41	54	-9.59	-	-	360	101	V			
			EHT80 (484+242T RU90)	6385	6+5	1.504403	58.63	PK-U	27.9	0.00	-47.41	39.12	-	-	74	-34.88	0	101	H
						1.505715	58.53	PK-U	27.9	0.00	-47.41	39.02	-	-	74	-34.98	0	200	V
						1.508807	47.00	ADR	27.8	0.00	-47.38	27.42	54	-26.58	-	-	0	101	H
						1.512968	47.30	ADR	27.8	0.00	-47.35	27.75	54	-26.25	-	-	0	200	V
2.579219	45.97	ADR				32.6	0.00	-46.89	31.68	68.2	-36.52	-	-	0	200	H			
2.581007	57.75	PK-U				32.6	0.00	-46.88	43.47	-	-	88.2	-44.73	0	200	V			
2.586397	45.98	ADR				32.6	0.00	-46.88	31.70	68.2	-36.5	-	-	0	200	V			
2.587707	57.64	PK-U				32.6	0.00	-46.88	43.36	-	-	88.2	-44.84	0	200	H			
12.764926	53.22	PK-U				39.3	0.00	-41.09	51.43	-	-	88.2	-36.77	0	101	H			
12.783656	41.25	ADR				39.3	0.00	-41.37	39.18	68.2	-29.02	-	-	0	101	V			
12.786388	52.73	PK-U				39.3	0.00	-41.37	50.66	-	-	88.2	-37.54	0	101	V			
12.787088	41.13	ADR				39.3	0.00	-41.41	39.02	68.2	-29.18	-	-	0	101	H			
EHT80 (484+242T RU92)	6145	6+5	1.965712	58.79	PK-U	31.7	0.00	-47.37	43.12	-	-	88.2	-45.08	0	200	V			
			1.967377	58.32	PK-U	31.7	0.00	-47.39	42.63	-	-	88.2	-45.57	0	200	H			
			1.968746	46.97	ADR	31.8	0.00	-47.41	31.36	68.2	-36.84	-	-	0	200	H			
			1.970342	46.87	ADR	31.8	0.00	-47.42	31.25	68.2	-36.95	-	-	0	200	V			
			2.573758	45.75	ADR	32.6	0.00	-46.90	31.45	68.2	-36.75	-	-	0	200	H			
			2.579353	57.22	PK-U	32.6	0.00	-46.89	42.93	-	-	88.2	-45.27	0	200	H			
			2.580135	45.84	ADR	32.6	0.00	-46.88	31.56	68.2	-36.64	-	-	0	200	V			
			2.580864	57.36	PK-U	32.6	0.00	-46.88	43.08	-	-	88.2	-45.12	0	200	V			
			12.260916	41.68	ADR	38.9	0.00	-41.82	38.76	54	-15.24	-	-	0	101	V			
			12.261348	41.73	ADR	38.9	0.00	-41.82	38.81	54	-15.19	-	-	0	101	H			
			12.261948	53.59	PK-U	38.9	0.00	-41.81	50.68	-	-	74	-23.32	0	101	H			
			12.279994	53.69	PK-U	38.9	0.00	-41.32	51.27	-	-	74	-22.73	0	101	V			
EHT80 (484+242T RU93)	5985	6+5	1.856620	47.20	ADR	31.1	0.00	-47.40	30.90	68.2	-37.3	-	-	0	199	H			
			1.857300	59.30	PK-U	31.1	0.00	-47.39	43.01	-	-	88.2	-45.19	0	199	H			
			1.859477	58.87	PK-U	31.1	0.00	-47.38	42.59	-	-	88.2	-45.61	0	199	V			
			1.860837	47.41	ADR	31.1	0.00	-47.39	31.12	68.2	-37.08	-	-	0	199	V			
			2.448690	57.95	PK-U	32.4	0.00	-47.13	43.22	-	-	88.2	-44.98	0	101	H			
			2.451180	59.43	PK-U	32.4	0.00	-47.12	44.71	-	-	88.2	-43.49	0	101	V			
			2.470342	46.10	ADR	32.4	0.00	-47.04	31.46	68.2	-36.74	-	-	0	101	V			
			2.474430	46.10	ADR	32.4	0.00	-47.04	31.46	68.2	-36.74	-	-	0	101	H			
			11.884851	54.07	PK-U	38.7	0.00	-41.93	50.84	-	-	74	-23.16	0	200	V			
			11.905104	42.35	ADR	38.7	0.00	-41.82	39.23	54	-14.77	-	-	0	101	H			
			11.906588	42.11	ADR	38.7	0.00	-41.90	38.91	54	-15.09	-	-	0	200	V			
			11.913216	53.43	PK-U	38.7	0.00	-42.06	50.07	-	-	74	-23.93	0	101	H			

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

STATE A 160MHz

UNII-5 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity		
EHT160 (SU Mode)	6025	6+5	* 2.249223	46.34	ADR	32.2	0.00	-47.60	30.94	54	-23.06	-	-	0	101	V		
			* 2.249778	58.74	PK-U	32.2	0.00	-47.62	43.32	-	-	74	-30.68	0	101	V		
			* 2.252821	57.93	PK-U	32.2	0.00	-47.62	42.51	-	-	74	-31.49	0	199	H		
			* 2.256656	46.39	ADR	32.2	0.00	-47.63	30.96	54	-23.04	-	-	0	199	H		
			* 4.794304	56.03	PK-U	34.2	0.00	-44.97	45.26	-	-	74	-28.74	0	199	V		
			* 4.798513	43.65	ADR	34.2	0.00	-44.95	32.90	54	-21.1	-	-	0	101	H		
			* 4.800632	43.68	ADR	34.2	0.00	-44.96	32.92	54	-21.08	-	-	0	199	V		
			* 4.816280	55.75	PK-U	34.2	0.00	-44.83	45.12	-	-	74	-28.88	0	101	H		
			* 15.830525	42.43	ADR	40.6	0.00	-41.05	41.98	54	-12.02	-	-	0	101	H		
			* 15.833521	42.65	ADR	40.6	0.00	-41.02	42.23	54	-11.77	-	-	0	200	V		
			* 15.838149	54.73	PK-U	40.6	0.00	-40.97	54.36	-	-	74	-19.64	0	200	V		
			* 15.847600	54.40	PK-U	40.6	0.00	-40.97	54.03	-	-	74	-19.97	0	101	H		
	6185		* 2.237109	58.24	PK-U	32.2	0.00	-47.53	42.91	-	-	74	-31.09	0	101	H		
			* 2.254344	46.42	ADR	32.2	0.00	-47.63	30.99	54	-23.01	-	-	0	101	V		
			* 2.256042	58.25	PK-U	32.2	0.00	-47.63	42.82	-	-	74	-31.18	0	101	V		
			* 2.259254	46.30	ADR	32.1	0.00	-47.64	30.76	54	-23.24	-	-	0	101	H		
			* 4.704180	44.07	ADR	34.2	0.00	-45.40	32.87	54	-21.13	-	-	0	101	V		
			* 4.728911	55.76	PK-U	34.2	0.00	-45.31	44.65	-	-	74	-29.35	0	101	V		
			* 4.731498	44.30	ADR	34.2	0.00	-45.31	33.19	54	-20.81	-	-	0	200	H		
			* 4.738715	55.85	PK-U	34.2	0.00	-45.29	44.76	-	-	74	-29.24	0	200	H		
			* 16.055602	42.40	ADR	40.9	0.00	-41.07	42.23	54	-11.77	-	-	0	200	H		
			* 16.059034	54.23	PK-U	40.9	0.00	-41.09	54.04	-	-	74	-19.96	0	200	V		
			* 16.061141	42.43	ADR	40.9	0.00	-41.05	42.28	54	-11.72	-	-	0	200	V		
			* 16.083431	54.07	PK-U	40.9	0.00	-41.25	53.72	-	-	74	-20.28	0	200	H		
	6345		* 2.241978	58.45	PK-U	32.2	0.00	-47.57	43.08	-	-	74	-30.92	0	101	V		
			* 2.246493	46.41	ADR	32.2	0.00	-47.59	31.02	54	-22.98	-	-	0	101	V		
			* 2.255384	58.57	PK-U	32.2	0.00	-47.63	43.14	-	-	74	-30.86	0	200	H		
			* 2.255917	46.39	ADR	32.2	0.00	-47.63	30.96	54	-23.04	-	-	0	200	H		
			* 4.711934	44.27	ADR	34.2	0.00	-45.33	33.14	54	-20.86	-	-	0	101	H		
			* 4.720284	55.83	PK-U	34.2	0.00	-45.36	44.67	-	-	74	-29.33	0	101	H		
			* 4.730058	55.68	PK-U	34.2	0.00	-45.33	44.55	-	-	74	-29.45	0	200	V		
			* 4.738222	44.24	ADR	34.2	0.00	-45.29	33.15	54	-20.85	-	-	0	200	V		
			* 16.049279	54.28	PK-U	40.9	0.00	-41.17	54.01	-	-	74	-19.99	0	200	H		
			* 16.064829	54.23	PK-U	40.9	0.00	-41.10	54.03	-	-	74	-19.97	0	200	V		
			* 16.065109	42.44	ADR	40.9	0.00	-41.10	42.24	54	-11.76	-	-	0	200	V		
			* 16.065713	42.54	ADR	40.9	0.00	-41.09	42.35	54	-11.65	-	-	0	200	H		
	EHT160 (996+484T S95)		6025	6+5	1.854726	58.46	PK-U	30.6	0.00	-46.33	42.73	-	-	88.2	-45.47	360	199	H
					1.856741	57.95	PK-U	30.6	0.00	-46.33	42.22	-	-	88.2	-45.98	360	200	V
					1.856859	46.55	ADR	30.6	0.00	-46.33	30.82	68.2	-37.38	-	-	360	199	H
					1.857288	46.63	ADR	30.6	0.00	-46.33	30.90	68.2	-37.3	-	-	360	200	V
					3.110725	44.31	ADR	33.1	0.00	-45.87	31.54	68.2	-36.66	-	-	360	101	H
					3.116448	55.93	PK-U	33.0	0.00	-45.84	43.09	-	-	88.2	-45.11	360	101	V
					3.135864	44.09	ADR	33.0	0.00	-45.71	31.38	68.2	-36.82	-	-	360	101	V
					3.140659	56.49	PK-U	33.0	0.00	-45.68	43.81	-	-	88.2	-44.39	360	101	H
					13.849420	53.73	PK-U	39.0	0.00	-42.06	50.67	-	-	88.2	-37.53	360	101	V
					13.851420	41.81	ADR	39.0	0.00	-42.05	38.76	68.2	-29.44	-	-	360	101	H
					13.868466	41.72	ADR	39.1	0.00	-42.01	38.81	68.2	-29.39	-	-	360	101	V
					13.875226	53.79	PK-U	39.0	0.00	-41.99	50.80	-	-	88.2	-37.4	360	101	H
EHT160 (996+484T RU95)	6185		6+5	* 4.229109	57.54	PK-U	33.7	0.00	-47.46	43.78	-	-	74	-30.22	0	101	H	
				* 4.223025	45.88	ADR	33.6	0.09	-47.61	31.96	54	-22.04	-	-	0	101	H	
				* 4.236167	57.65	PK-U	33.7	0.00	-47.64	43.71	-	-	74	-30.29	0	200	V	
				* 4.236718	46.05	ADR	33.7	0.09	-47.65	32.19	54	-21.81	-	-	0	200	V	
				* 11.912621	54.33	PK-U	38.9	0.00	-43.30	49.93	-	-	74	-24.07	0	200	H	
				* 11.933203	42.77	ADR	39.0	0.09	-43.55	38.31	54	-15.69	-	-	0	200	H	
				* 15.884230	54.58	PK-U	41.2	0.00	-42.12	53.66	-	-	74	-20.34	0	200	H	
				* 15.874011	42.70	ADR	41.2	0.09	-42.14	41.85	54	-12.15	-	-	0	200	H	
				* 11.943170	55.04	PK-U	39.0	0.00	-43.73	50.31	-	-	74	-23.69	0	200	V	
				* 11.952209	42.96	ADR	39.0	0.09	-43.75	38.30	54	-15.7	-	-	0	200	V	
				* 15.865055	54.37	PK-U	41.2	0.00	-42.21	53.36	-	-	74	-20.64	0	200	V	
				* 15.859504	42.99	ADR	41.2	0.09	-42.25	42.03	54	-11.97	-	-	0	200	V	
EHT160 (996+484T RU94)	6345		6+5	1.908195	57.83	PK-U	31.0	0.00	-46.37	42.46	-	-	88.2	-45.74	360	200	H	
				1.910703	46.32	ADR	31.0	0.00	-46.38	30.94	68.2	-37.26	-	-	360	101	V	
				1.912123	46.16	ADR	31.1	0.00	-46.38	30.88	68.2	-37.32	-	-	360	200	H	
				1.914405	57.99	PK-U	31.1	0.00	-46.39	42.70	-	-	88.2	-45.5	360	101	V	
				3.089997	45.15	ADR	33.1	0.00	-46.00	32.25	68.2	-35.95	-	-	360	101	H	
				3.091502	44.54	ADR	33.1	0.00	-45.99	31.65	68.2	-36.55	-	-	360	101	V	
				3.107994	56.91	PK-U	33.1	0.00	-45.89	44.12	-	-	88.2	-44.08	360	101	V	
				3.109701	56.28	PK-U	33.1	0.00	-45.88	43.50	-	-	88.2	-44.7	360	101	H	
				13.778459	53.28	PK-U	39.1	0.00	-41.83	50.55	-	-	88.2	-37.65	360	200	H	
				13.779551	41.61	ADR	39.1	0.00	-41.83	38.88	68.2	-29.32	-	-	360	101	V	
				13.787482	53.34	PK-U	39.1	0.00	-41.87	50.57	-	-	88.2	-37.63	360	101	V	
				13.788478	41.81	ADR	39.1	0.00	-41.88	39.03	68.2	-29.17	-	-	360	200	H	

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

STATE B 160MHz

UNII-5 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbl/ Ftr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity	
EHT160 (SU Mode)	6025	6+5	1.942307	61.98	PK-U	31.5	0.00	-50.22	43.26	-	-	88.2	-44.94	360	101	H	
			1.946524	50.42	ADR	31.5	0.00	-50.19	31.73	68.2	-36.47	-	-	360	101	H	
			1.942888	62.07	PK-U	31.5	0.00	-50.21	43.36	-	-	88.2	-44.84	360	200	V	
			1.947319	50.60	ADR	31.5	0.00	-50.19	31.91	68.2	-36.29	-	-	360	200	V	
			10.163936	57.47	PK-U	37.5	0.00	-46.16	48.81	-	-	88.2	-39.39	360	200	H	
			10.169860	45.65	ADR	37.5	0.00	-46.17	36.98	68.2	-31.22	-	-	360	200	H	
			17.661709	53.97	PK-U	41.4	0.00	-39.26	56.11	-	-	88.2	-32.09	360	200	H	
			17.666504	41.90	ADR	41.4	0.00	-39.47	43.83	68.2	-24.37	-	-	360	200	H	
			10.174280	57.61	PK-U	37.5	0.00	-46.27	48.84	-	-	88.2	-39.36	360	200	V	
			10.190290	45.90	ADR	37.6	0.00	-46.17	37.33	68.2	-30.87	-	-	360	200	V	
			17.668004	53.35	PK-U	41.4	0.00	-39.55	55.20	-	-	88.2	-33	360	101	V	
			17.671615	41.80	ADR	41.4	0.00	-39.60	43.60	68.2	-24.6	-	-	360	101	V	
			2.195763	57.60	PK-U	31.9	0.00	-47.29	42.21	-	-	88.2	-45.99	0	101	H	
			* 2.209876	57.42	PK-U	32.0	0.00	-47.40	42.02	-	-	74	-31.98	0	101	V	
			* 2.230821	45.84	ADR	32.1	0.00	-47.50	30.44	54	-23.56	-	-	0	101	H	
			* 2.231140	46.04	ADR	32.1	0.00	-47.50	30.64	54	-23.36	-	-	0	101	V	
			* 4.801593	55.30	PK-U	34.2	0.00	-44.95	44.55	-	-	74	-29.45	0	101	V	
	* 4.802161		43.76	ADR	34.2	0.00	-44.95	33.01	54	-20.99	-	-	0	101	H		
	* 4.802308		43.66	ADR	34.2	0.00	-44.95	32.91	54	-21.09	-	-	0	101	V		
	* 4.806601		55.46	PK-U	34.2	0.00	-44.94	44.72	-	-	74	-29.28	0	101	H		
	* 15.870495		54.82	PK-U	40.6	0.00	-41.19	54.23	-	-	74	-19.77	0	199	H		
	* 15.876170		42.74	ADR	40.7	0.00	-41.28	42.16	54	-11.84	-	-	0	199	H		
	* 15.884357		42.68	ADR	40.7	0.00	-41.32	42.06	54	-11.94	-	-	0	199	V		
	* 15.889809		54.29	PK-U	40.7	0.00	-41.30	53.69	-	-	74	-20.31	0	199	V		
	* 2.243629		58.64	PK-U	32.2	0.00	-47.58	43.26	-	-	74	-30.74	0	101	V		
	* 2.243731		46.31	ADR	32.2	0.00	-47.58	30.93	54	-23.07	-	-	0	101	V		
	* 2.245023		46.39	ADR	32.2	0.00	-47.58	31.01	54	-22.99	-	-	0	199	H		
	* 2.248476		58.22	PK-U	32.2	0.00	-47.60	42.82	-	-	74	-31.18	0	199	H		
	* 4.746160		44.04	ADR	34.2	0.00	-45.26	32.98	54	-21.02	-	-	0	101	H		
	* 4.753364		55.76	PK-U	34.2	0.00	-45.22	44.74	-	-	74	-29.26	0	101	H		
	* 4.754398		44.06	ADR	34.2	0.00	-45.20	33.06	54	-20.94	-	-	0	199	V		
	* 4.773783		55.53	PK-U	34.2	0.00	-45.06	44.67	-	-	74	-29.33	0	199	V		
	* 15.781212		54.58	PK-U	40.5	0.00	-40.88	54.20	-	-	74	-19.8	0	199	H		
	* 15.797146		54.03	PK-U	40.6	0.00	-41.04	53.59	-	-	74	-20.41	0	199	V		
	* 15.799150		42.56	ADR	40.6	0.00	-41.03	42.13	54	-11.87	-	-	0	199	V		
	* 15.814132		42.72	ADR	40.6	0.00	-41.19	42.13	54	-11.87	-	-	0	199	H		
	EHT160 (996+484T S95)		6025	1.909844	58.22	PK-U	31.0	0.00	-46.28	42.94	-	-	88.2	-45.26	1	101	H
				1.910297	46.54	ADR	31.0	0.00	-46.30	31.24	68.2	-36.96	-	-	1	101	H
				1.912822	46.41	ADR	31.1	0.00	-46.22	31.29	68.2	-36.91	-	-	1	200	V
				1.917559	57.93	PK-U	31.1	0.00	-46.26	42.77	-	-	88.2	-45.43	1	200	V
10.072888		42.38		ADR	37.7	0.00	-42.29	37.79	68.2	-30.41	-	-	1	200	V		
10.075257		54.42		PK-U	37.7	0.00	-42.30	49.82	-	-	88.2	-38.38	1	101	H		
10.091779		54.28		PK-U	37.7	0.00	-42.70	49.28	-	-	88.2	-38.92	1	200	V		
10.105842		42.65		ADR	37.7	0.00	-42.62	37.73	68.2	-30.47	-	-	1	101	H		
13.940411		55.53		PK-U	39.0	0.00	-42.14	52.39	-	-	88.2	-35.81	1	200	V		
13.941963		43.42		ADR	39.0	0.00	-42.10	40.32	68.2	-27.88	-	-	1	200	V		
14.008588		55.58		PK-U	39.0	0.00	-42.56	52.02	-	-	88.2	-36.18	1	200	H		
14.012212		43.30		ADR	39.0	0.00	-42.58	39.72	68.2	-28.48	-	-	1	200	H		
EHT160 (996+484T RU95)		6185		1.908195	57.83	PK-U	31.0	0.00	-46.37	42.46	-	-	88.2	-45.74	360	200	H
	1.910703		46.32	ADR	31.0	0.00	-46.38	30.94	68.2	-37.26	-	-	360	101	V		
	1.912123		46.16	ADR	31.1	0.00	-46.38	30.88	68.2	-37.32	-	-	360	200	H		
	1.914405		57.99	PK-U	31.1	0.00	-46.39	42.70	-	-	88.2	-45.5	360	101	V		
	3.089997		45.15	ADR	33.1	0.00	-46.00	32.25	68.2	-35.95	-	-	360	101	H		
	3.091502		44.54	ADR	33.1	0.00	-45.99	31.65	68.2	-36.55	-	-	360	101	V		
	3.107994		56.91	PK-U	33.1	0.00	-45.89	44.12	-	-	88.2	-44.08	360	101	V		
	3.109701		56.28	PK-U	33.1	0.00	-45.88	43.50	-	-	88.2	-44.7	360	101	H		
	13.778459		53.28	PK-U	39.1	0.00	-41.83	50.55	-	-	88.2	-37.65	360	200	H		
	13.779551		41.61	ADR	39.1	0.00	-41.83	38.88	68.2	-29.32	-	-	360	101	V		
EHT160 (996+484T RU94)	6345	13.787482	53.34	PK-U	39.1	0.00	-41.87	50.57	-	-	88.2	-37.63	360	101	V		
		13.788478	41.81	ADR	39.1	0.00	-41.88	39.03	68.2	-29.17	-	-	360	200	H		
		1.978356	46.25	ADR	31.4	0.00	-46.50	31.15	68.2	-37.05	-	-	3	101	V		
		1.981884	57.75	PK-U	31.4	0.00	-46.40	42.75	-	-	88.2	-45.45	3	101	V		
		2.022497	46.57	ADR	31.5	0.00	-46.45	31.62	68.2	-36.58	-	-	3	200	H		
		2.025848	58.96	PK-U	31.5	0.00	-46.50	43.96	-	-	88.2	-44.24	3	200	H		
		10.022660	54.46	PK-U	37.7	0.00	-42.30	49.86	-	-	88.2	-38.34	3	101	H		
		10.023848	42.25	ADR	37.7	0.00	-42.38	37.57	68.2	-30.63	-	-	3	200	V		
		10.041310	54.42	PK-U	37.7	0.00	-42.77	49.35	-	-	88.2	-38.85	3	200	V		
		10.054724	42.42	ADR	37.7	0.00	-42.67	37.45	68.2	-30.75	-	-	3	101	H		

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band



PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

WORST-CASE HARMONICS AND SPURIOUS EMISSIONS

STATE A

802.11be EHT20 / 45 & 6175 / 2TX / CDD / 26T/ RU4

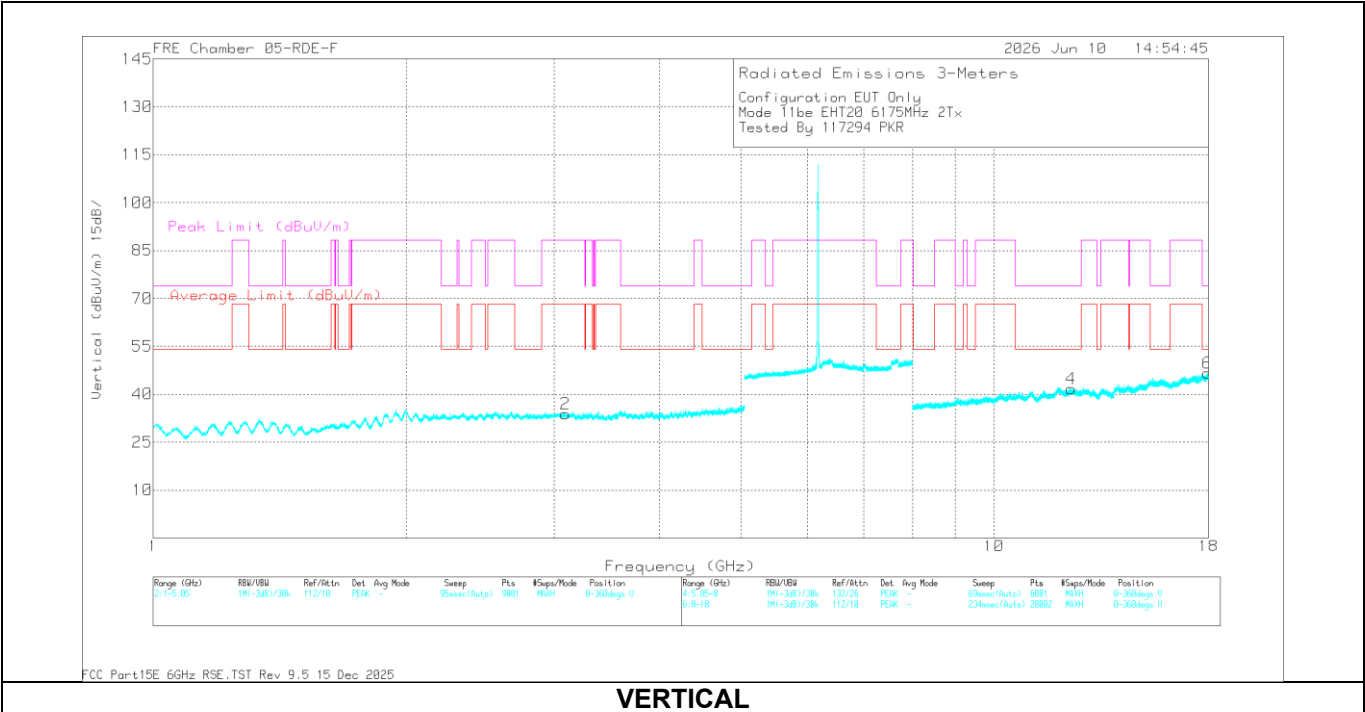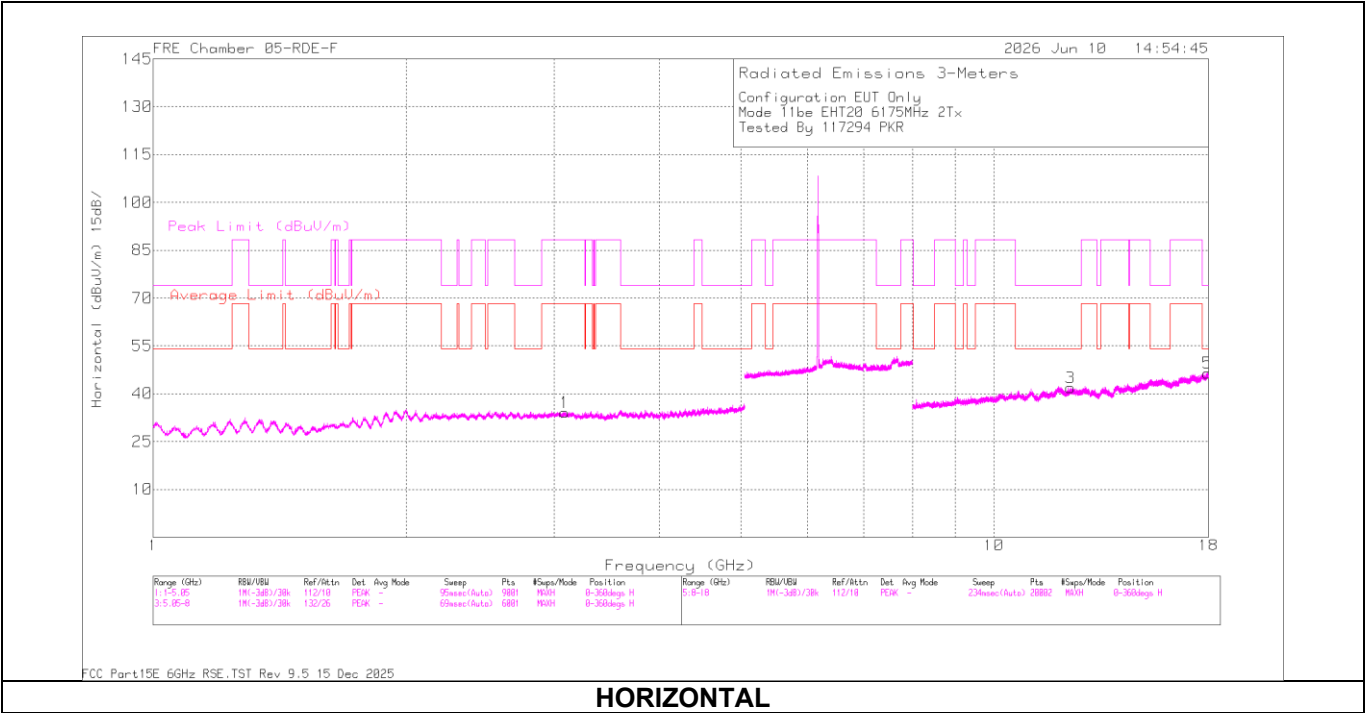

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbt/ Filt/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3.080031	58.77	PK-U	33.1	0	-47.60	44.27	-	-	88.2	-43.93	0	199	H
3.084168	47.02	ADR	33.1	0	-47.60	32.52	68.2	-35.68	-	-	0	199	H
3.099026	58.88	PK-U	33.1	0	-47.50	44.48	-	-	88.2	-43.72	0	101	V
3.073371	46.84	ADR	33.1	0	-47.70	32.24	68.2	-35.96	-	-	0	101	V
* 12.334219	53.80	PK-U	38.8	0	-42.60	50.00	-	-	74	-24	0	199	H
* 12.311913	42.08	ADR	38.8	0	-42.40	38.48	54	-15.52	-	-	0	199	H
* 12.369985	52.99	PK-U	38.7	0	-42.40	49.29	-	-	74	-24.71	0	199	V
* 12.352423	41.62	ADR	38.7	0	-42.30	38.02	54	-15.98	-	-	0	199	V
* 17.948991	52.41	PK-U	41.5	0	-37.70	56.21	-	-	74	-17.79	0	199	H
* 17.98524	40.41	ADR	41.5	0	-38.20	43.71	54	-10.29	-	-	0	199	H
* 17.956918	51.96	PK-U	41.5	0	-37.70	55.76	-	-	74	-18.24	0	199	V
* 17.958522	40.55	ADR	41.5	0	-37.65	44.40	54	-9.6	-	-	0	199	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

STATE B

802.11be EHT80 / 87 & 6385 / 2TX / CDD / SU

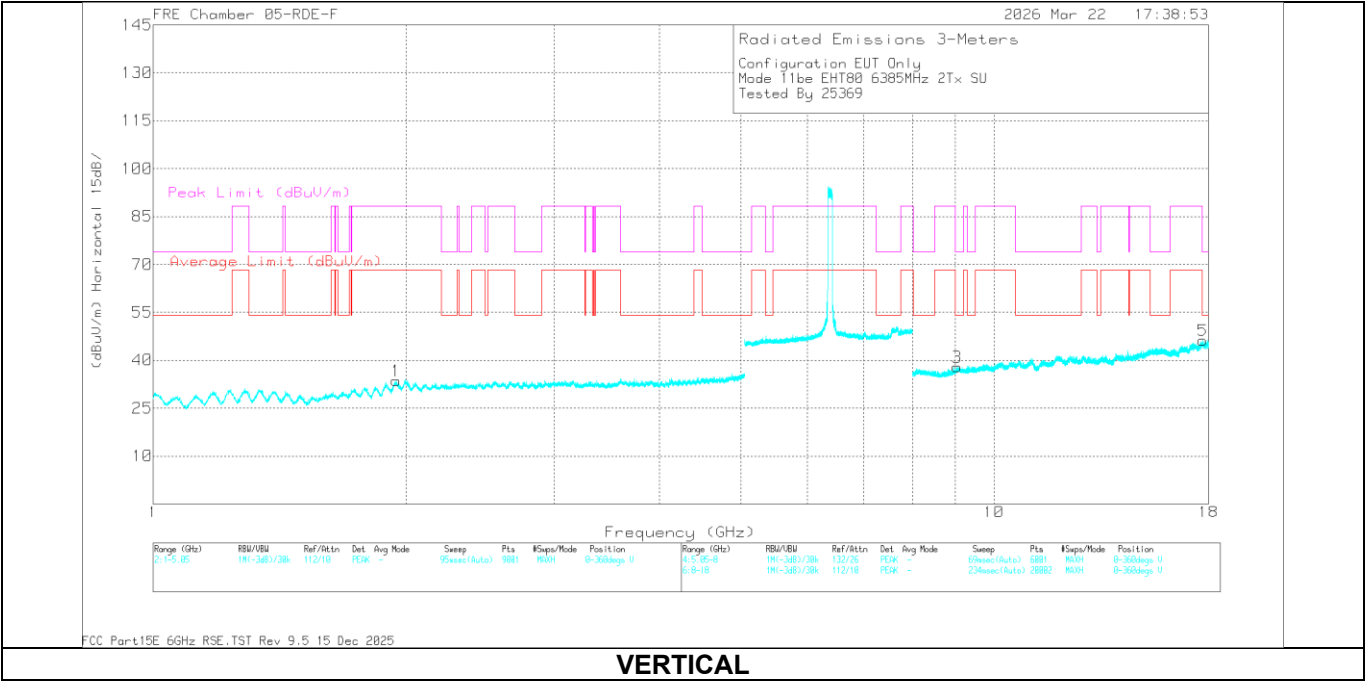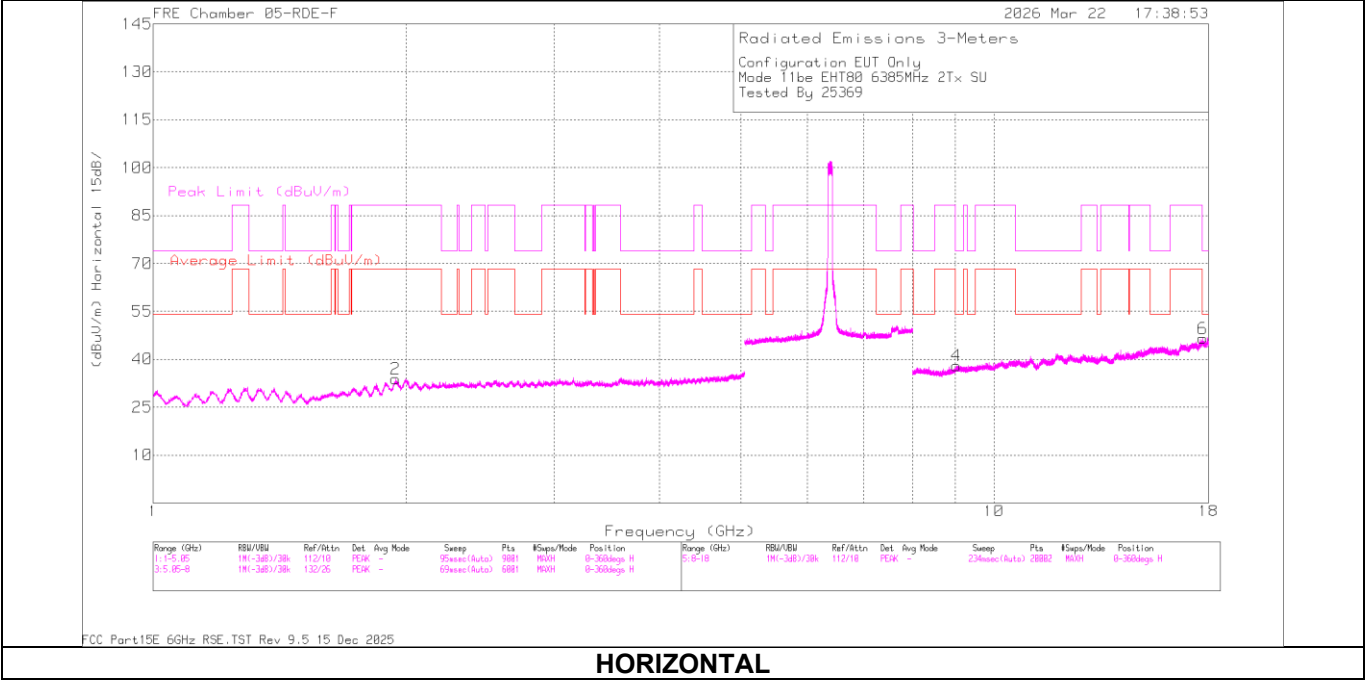

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbt/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1.943293	62.08	PK-U	31.5	0.00	-50.21	43.37	-	-	88.2	-44.83	360	199	H
1.941871	50.68	ADR	31.5	0.00	-50.24	31.94	68.2	-36.26	-	-	360	199	H
1.943093	62.29	PK-U	31.5	0.00	-50.21	43.58	-	-	88.2	-44.62	360	199	V
1.94947	50.30	ADR	31.4	0.00	-50.19	31.51	68.2	-36.69	-	-	360	199	V
* 9.025325	56.47	PK-U	36.2	0.00	-44.89	47.78	-	-	74	-26.22	360	101	H
* 9.036343	44.56	ADR	36.2	0.00	-44.85	35.91	54	-18.09	-	-	360	101	H
* 17.725841	54.07	PK-U	41.5	0.00	-39.35	56.22	-	-	74	-17.78	360	101	H
* 17.731252	42.20	ADR	41.5	0.00	-39.55	44.15	54	-9.85	-	-	360	101	H
* 9.04286	56.56	PK-U	36.2	0.00	-44.98	47.78	-	-	74	-26.22	360	200	V
* 9.045771	44.63	ADR	36.2	0.00	-44.96	35.87	54	-18.13	-	-	360	200	V
* 17.728321	53.82	PK-U	41.5	0.00	-39.42	55.90	-	-	74	-18.1	360	101	V
* 17.731181	42.45	ADR	41.5	0.00	-39.54	44.41	54	-9.59	-	-	360	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.1.6. 802.11be MIMO MODE IN UNII-6 BAND – SPURIOUS EMISSIONS**STATE A 20MHz**

UNII-6 (MIMO CDD)	Channel Frequency y MHz	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbt/ Fltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity		
EHT20 (SU Mode)	6435	6+5	* 2.370159	61.37	PK-U	31.9	0.00	-50.30	42.97	-	-	74	-31.03	360	199	V		
			* 2.373888	49.70	ADR	31.9	0.00	-50.32	31.28	54	-22.72	-	-	360	199	V		
			* 2.376943	49.69	ADR	32.0	0.00	-50.10	31.59	54	-22.41	-	-	360	101	H		
			* 2.381844	61.59	PK-U	32.0	0.00	-50.28	43.31	-	-	74	-30.69	360	101	H		
			* 3.987200	59.18	PK-U	33.4	0.00	-47.92	44.66	-	-	74	-29.34	360	101	H		
			* 3.997603	47.13	ADR	33.5	0.00	-48.24	32.39	54	-21.61	-	-	360	101	H		
			* 3.999054	47.12	ADR	33.5	0.00	-47.71	32.91	54	-21.09	-	-	360	199	V		
			* 4.003138	58.49	PK-U	33.5	0.00	-47.79	44.20	-	-	74	-29.8	360	199	V		
			* 11.069259	46.63	ADR	37.9	0.00	-44.80	39.73	54	-14.27	-	-	360	101	V		
			* 11.085161	58.38	PK-U	37.9	0.00	-44.57	51.71	-	-	74	-22.29	360	101	V		
			* 11.094534	46.29	ADR	37.9	0.00	-44.20	39.99	54	-14.01	-	-	360	101	H		
			* 11.130319	58.01	PK-U	37.9	0.00	-44.72	51.19	-	-	74	-22.81	360	101	H		
			2.192873	49.72	ADR	31.4	0.00	-50.00	31.12	68.2	-37.08	-	-	360	101	V		
			* 2.200550	49.56	ADR	31.4	0.00	-49.99	30.97	54	-23.03	-	-	360	101	H		
			* 2.201554	61.10	PK-U	31.4	0.00	-49.90	42.60	-	-	74	-31.4	360	101	H		
	* 2.221730		61.38	PK-U	31.5	0.00	-50.22	42.66	-	-	74	-31.34	360	101	H			
	* 2.227887		61.37	PK-U	31.5	0.00	-50.27	42.60	-	-	74	-31.4	360	101	V			
	* 2.234968		49.67	ADR	31.5	0.00	-49.81	31.36	54	-22.64	-	-	360	101	H			
	* 3.992724		58.87	PK-U	33.5	0.00	-48.08	44.29	-	-	74	-29.71	360	101	H			
	* 3.996302		47.25	ADR	33.5	0.00	-48.09	32.66	54	-21.34	-	-	360	101	H			
	* 4.002775		59.04	PK-U	33.5	0.00	-47.75	44.79	-	-	74	-29.21	360	200	V			
	* 4.008209		47.21	ADR	33.5	0.00	-48.08	32.63	54	-21.37	-	-	360	200	V			
	* 15.876774		59.23	PK-U	40.6	0.00	-45.75	54.08	-	-	74	-19.92	360	200	V			
	* 15.890665		47.60	ADR	40.7	0.00	-45.70	42.60	54	-11.4	-	-	360	200	V			
	* 16.000999		59.51	PK-U	40.8	0.00	-46.00	54.31	-	-	74	-19.69	360	200	H			
	* 16.001035		47.52	ADR	40.8	0.00	-46.00	42.32	54	-11.68	-	-	360	200	H			
	* 2.234813		49.55	ADR	31.5	0.00	-49.86	31.19	54	-22.81	-	-	360	200	H			
	* 2.235638		49.78	ADR	31.5	0.00	-50.25	31.03	54	-22.97	-	-	360	101	V			
	* 2.246789		61.07	PK-U	31.5	0.00	-50.24	42.33	-	-	74	-31.67	360	200	H			
	* 2.253716		61.18	PK-U	31.5	0.00	-50.16	42.52	-	-	74	-31.48	360	101	V			
	* 4.578586		58.85	PK-U	34.1	0.00	-48.42	44.53	-	-	74	-29.47	360	200	H			
	* 4.608787		47.16	ADR	34.1	0.00	-48.68	32.58	54	-21.42	-	-	360	200	H			
	* 4.633932		59.87	PK-U	34.2	0.00	-48.80	45.27	-	-	74	-28.73	360	101	V			
	* 4.651503		47.49	ADR	34.2	0.00	-48.85	32.84	54	-21.16	-	-	360	101	V			
	* 11.072375		58.29	PK-U	37.9	0.00	-44.99	51.20	-	-	74	-22.8	360	101	V			
	* 11.086126		46.42	ADR	37.9	0.00	-44.43	39.89	54	-14.11	-	-	360	101	V			
	* 11.133368		46.06	ADR	37.9	0.00	-45.03	38.93	54	-15.07	-	-	360	101	H			
	* 11.145011		58.29	PK-U	37.9	0.00	-45.20	50.99	-	-	74	-23.01	360	101	H			
	* 11.159906		58.01	PK-U	37.9	0.00	-45.67	50.24	-	-	74	-23.76	360	101	H			
	* 11.171317		46.04	ADR	38.0	0.00	-45.33	38.71	54	-15.29	-	-	360	101	H			
	EHT20 (26T RU0)		6435	6+5	* 4.125396	57.76	PK-U	33.5	0.00	-47.60	43.66	-	-	74	-30.34	360	101	H
					* 4.125787	46.18	ADR	33.5	0.00	-47.61	32.07	54	-21.93	-	-	360	101	H
					* 4.115944	57.46	PK-U	33.5	0.00	-47.64	43.32	-	-	74	-30.68	360	101	V
					* 4.117455	45.84	ADR	33.5	0.00	-47.68	31.66	54	-22.34	-	-	360	101	V
* 11.996611					54.74	PK-U	39.0	0.00	-43.59	50.15	-	-	74	-23.85	360	200	H	
* 11.995483					43.33	ADR	39.0	0.00	-43.60	38.73	54	-15.27	-	-	360	200	H	
* 15.960282					54.58	PK-U	41.1	0.00	-42.29	53.39	-	-	74	-20.61	360	200	H	
* 15.972705					43.04	ADR	41.1	0.00	-42.29	41.85	54	-12.15	-	-	360	200	H	
* 11.986769					55.06	PK-U	39.0	0.00	-43.42	50.64	-	-	74	-23.36	360	200	V	
* 12.002859					43.65	ADR	39.0	0.00	-43.62	39.03	54	-14.97	-	-	360	200	V	
* 15.968161					55.30	PK-U	41.1	0.00	-42.34	54.06	-	-	74	-19.94	360	200	V	
* 15.963889					42.87	ADR	41.1	0.00	-42.32	41.65	54	-12.35	-	-	360	200	V	
EHT20 (26T RU4)	6475		6+5	2.449627	61.23	PK-U	32.4	0.00	-50.17	43.46	-	-	88.2	-44.74	360	200	H	
				2.449662	49.34	ADR	32.4	0.00	-50.17	31.57	68.2	-36.63	-	-	360	200	H	
				2.420556	61.05	PK-U	32.5	0.00	-50.12	43.43	-	-	88.2	-44.77	360	200	V	
				2.440972	49.26	ADR	32.5	0.00	-50.12	31.64	68.2	-36.56	-	-	360	200	V	
				14.014696	55.82	PK-U	39.1	0.00	-43.81	51.11	-	-	88.2	-37.09	360	200	H	
				14.009640	44.42	ADR	39.1	0.00	-43.88	39.64	68.2	-28.56	-	-	360	200	H	
				16.730672	55.01	PK-U	41.0	0.00	-42.24	53.77	-	-	88.2	-34.43	360	101	H	
				16.732688	42.95	ADR	41.0	0.00	-42.23	41.72	68.2	-26.48	-	-	360	101	H	
				14.012412	56.45	PK-U	39.1	0.00	-43.92	51.63	-	-	88.2	-36.57	360	200	V	
				14.016596	44.51	ADR	39.1	0.00	-43.79	39.82	68.2	-28.38	-	-	360	200	V	
16.724135	55.17		PK-U	41.0	0.00	-42.26	53.91	-	-	88.2	-34.29	360	200	V				
16.717504	43.48		ADR	41.0	0.00	-42.34	42.14	68.2	-26.06	-	-	360	200	V				
EHT20 (26T RU8)	6515		6+5	* 3.864910	58.11	PK-U	33.4	0.00	-47.81	43.70	-	-	74	-30.3	360	101	H	
				* 3.864124	46.46	ADR	33.4	0.00	-47.81	32.05	54	-21.95	-	-	360	101	H	
				* 3.843882	57.62	PK-U	33.4	0.00	-47.73	43.29	-	-	74	-30.71	360	101	V	
				* 3.862996	46.34	ADR	33.4	0.00	-47.80	31.94	54	-22.06	-	-	360	101	V	
				* 11.930727	55.15	PK-U	39.0	0.00	-43.51	50.64	-	-	74	-23.36	360	101	H	
				* 11.935490	42.97	ADR	39.0	0.00	-43.63	38.34	54	-15.66	-	-	360	101	H	
				* 15.792105	54.52	PK-U	41.2	0.00	-42.19	53.53	-	-	74	-20.47	360	199	H	
				* 15.788870	42.31	ADR	41.2	0.00	-42.21	41.30	54	-12.7	-	-	360	199	H	
				* 11.915480	55.33	PK-U	38.9	0.00	-43.27	50.96	-	-	74	-23.04	360	199	V	
				* 11.926883	43.22	ADR	39.0	0.00	-43.46	38.76	54	-15.24	-	-	360	199	V	
* 15.769156	54.23		PK-U	41.2	0.00	-41.99	53.44	-	-	74	-20.56	360	199	V				
* 15.776019	42.63		ADR	41.2	0.00	-42.05	41.78	54	-12.22	-	-	360	199	V				

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

STATE A 20MHz- Cont.

UNII-6 (MIMO CDD)	Channel Frequency MHz	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbt/FI tr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (106T RU53)	6435	6+5	3.214665	57.92	PK-U	32.8	0.00	-47.20	43.52	-	-	88.2	-44.68	0	101	H
			3.201289	46.40	ADR	32.9	0.00	-47.40	31.90	68.2	-36.3	-	-	0	101	H
			3.200725	59.28	PK-U	32.9	0.00	-47.40	44.78	-	-	88.2	-43.42	0	200	V
			3.233086	46.38	ADR	32.8	0.00	-47.40	31.78	68.2	-36.42	-	-	0	200	V
			12.865005	52.86	PK-U	39.0	0.00	-42.50	49.36	-	-	88.2	-38.84	0	200	H
			12.872012	41.42	ADR	39.0	0.00	-42.50	37.92	68.2	-30.28	-	-	0	200	H
			17.662416	51.94	PK-U	41.4	0.00	-38.70	54.64	-	-	88.2	-33.56	0	101	H
			17.666032	40.21	ADR	41.4	0.00	-38.70	42.91	68.2	-25.29	-	-	0	101	H
			12.902270	52.90	PK-U	39.0	0.00	-42.53	49.37	-	-	88.2	-38.83	0	200	V
			12.900934	41.55	ADR	39.0	0.00	-42.60	37.95	68.2	-30.25	-	-	0	200	V
	17.657781		51.99	PK-U	41.5	0.00	-38.72	54.77	-	-	88.2	-33.43	0	101	V	
	17.653329		40.38	ADR	41.5	0.00	-38.80	43.08	68.2	-25.12	-	-	0	101	V	
	3.234458		58.64	PK-U	32.8	0.00	-47.40	44.04	-	-	88.2	-44.16	0	200	H	
	3.204732		46.42	ADR	32.8	0.00	-47.40	31.82	68.2	-36.38	-	-	0	200	H	
	3.221882		57.96	PK-U	32.8	0.00	-47.30	43.46	-	-	88.2	-44.74	0	101	V	
	3.234121		46.24	ADR	32.8	0.00	-47.40	31.64	68.2	-36.56	-	-	0	101	V	
	12.938762		54.28	PK-U	38.9	0.00	-42.70	50.48	-	-	88.2	-37.72	0	200	H	
	12.970959		42.73	ADR	38.9	0.00	-42.70	38.93	68.2	-29.27	-	-	0	200	H	
	17.645201		52.04	PK-U	41.5	0.00	-38.90	54.64	-	-	88.2	-33.56	0	200	H	
	17.655612		40.49	ADR	41.5	0.00	-38.80	43.19	68.2	-25.01	-	-	0	200	H	
12.946748	53.78	PK-U	38.9	0.00	-42.70	49.98	-	-	88.2	-38.22	0	200	V			
12.952223	42.42	ADR	38.9	0.00	-42.70	38.62	68.2	-29.58	-	-	0	200	V			
17.600548	52.55	PK-U	41.5	0.00	-38.90	55.15	-	-	88.2	-33.05	0	200	V			
17.595769	40.71	ADR	41.5	0.00	-39.00	43.21	68.2	-24.99	-	-	0	200	V			
EHT20 (106T RU54)	6515	6+5	3.232659	58.25	PK-U	32.8	0.00	-47.40	43.65	-	-	88.2	-44.55	0	200	H
			* 3.260838	46.76	ADR	32.8	0.00	-47.28	32.28	54	-21.72	-	-	0	200	H
			3.250239	58.27	PK-U	32.8	0.00	-47.40	43.67	-	-	88.2	-44.53	0	101	V
			3.251670	46.46	ADR	32.8	0.00	-47.40	31.86	68.2	-36.34	-	-	0	101	V
			13.059854	54.51	PK-U	38.8	0.00	-42.40	50.91	-	-	88.2	-37.29	0	200	H
			13.041228	42.72	ADR	38.8	0.00	-42.60	38.92	68.2	-29.28	-	-	0	200	H
			17.577918	53.00	PK-U	41.4	0.00	-39.20	55.20	-	-	88.2	-33	0	200	H
			17.589581	40.86	ADR	41.4	0.00	-39.10	43.16	68.2	-25.04	-	-	0	200	H
			13.042531	54.16	PK-U	38.8	0.00	-42.60	50.36	-	-	88.2	-37.84	0	200	V
			13.045523	42.58	ADR	38.8	0.00	-42.50	38.88	68.2	-29.32	-	-	0	200	V
			17.608575	52.35	PK-U	41.4	0.00	-39.00	54.75	-	-	88.2	-33.45	0	200	V
			17.597532	40.80	ADR	41.5	0.00	-39.00	43.30	68.2	-24.9	-	-	0	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

STATE B 20MHz

UNII-6 (MIMO CDD)	Channel Frequenc y MHz	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbt/ Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity			
EHT20 (SU Mode)	6435	6+5	2.190250	61.99	PK-U	31.4	0.00	-50.30	43.09	-	-	88.2	-45.11	360	101	V			
			2.194809	49.92	ADR	31.4	0.00	-49.88	31.44	68.2	-36.76	-	-	360	101	V			
			2.195766	49.90	ADR	31.4	0.00	-50.11	31.19	68.2	-37.01	-	-	360	101	H			
			*2.229216	61.90	PK-U	31.5	0.00	-50.08	43.32	-	-	74	-30.68	360	101	H			
			*3.946668	58.58	PK-U	33.4	0.00	-48.20	43.78	-	-	74	-30.22	360	101	H			
			*3.95301	46.87	ADR	33.4	0.00	-48.00	32.27	54	-21.73	-	-	360	101	H			
			*3.987153	59.11	PK-U	33.4	0.00	-47.92	44.59	-	-	74	-29.41	360	199	V			
			*3.994738	47.03	ADR	33.5	0.00	-48.37	32.16	54	-21.84	-	-	360	199	V			
			*12.295266	46.22	ADR	39.0	0.00	-44.63	40.59	54	-13.41	-	-	360	101	H			
			*12.310957	57.38	PK-U	39.0	0.00	-44.50	51.88	-	-	74	-22.12	360	101	H			
			*12.320849	45.55	ADR	39.0	0.00	-44.82	39.73	54	-14.27	-	-	360	200	V			
			*12.34471	56.81	PK-U	39.0	0.00	-44.63	51.18	-	-	74	-22.82	360	200	V			
			*2.234431	61.72	PK-U	31.5	0.00	-49.97	43.25	-	-	74	-30.75	360	200	H			
			*2.238409	61.41	PK-U	31.5	0.00	-49.94	42.97	-	-	74	-31.03	360	101	V			
			*2.241617	49.60	ADR	31.5	0.00	-49.66	31.44	54	-22.56	-	-	360	200	H			
			*2.259006	49.65	ADR	31.5	0.00	-50.20	30.95	54	-23.05	-	-	360	101	V			
			*3.994773	47.28	ADR	33.5	0.00	-48.39	32.39	54	-21.61	-	-	360	101	H			
			*3.99799	58.83	PK-U	33.5	0.00	-48.20	44.13	-	-	74	-29.87	360	200	V			
			*3.998612	58.62	PK-U	33.5	0.00	-47.89	44.23	-	-	74	-29.77	360	101	H			
			*3.998848	47.11	ADR	33.5	0.00	-47.78	32.83	54	-21.17	-	-	360	200	V			
			*11.718678	58.44	PK-U	38.5	0.00	-45.60	51.34	-	-	74	-22.66	360	101	V			
			*11.71931	58.11	PK-U	38.5	0.00	-45.56	51.05	-	-	74	-22.95	360	101	V			
			*11.720786	46.52	ADR	38.5	0.00	-45.62	39.40	54	-14.6	-	-	360	101	V			
			*11.727221	46.52	ADR	38.5	0.00	-45.60	39.42	54	-14.58	-	-	360	101	V			
	*11.734353		59.23	PK-U	38.5	0.00	-45.63	52.10	-	-	74	-21.9	360	101	H				
	*11.740248		46.71	ADR	38.6	0.00	-45.48	39.83	54	-14.17	-	-	360	101	H				
	6515		2.195990	61.81	PK-U	31.4	0.00	-50.20	43.01	-	-	88.2	-45.19	360	199	V			
			2.199367	49.63	ADR	31.4	0.00	-49.72	31.31	68.2	-36.89	-	-	360	199	H			
			*2.203837	61.30	PK-U	31.4	0.00	-50.22	42.48	-	-	74	-31.52	360	199	H			
			*2.207348	49.79	ADR	31.4	0.00	-50.23	30.96	54	-23.04	-	-	360	199	V			
			*3.941543	58.10	PK-U	33.4	0.00	-48.14	43.36	-	-	74	-30.64	360	101	H			
			*3.946209	46.77	ADR	33.4	0.00	-48.06	32.11	54	-21.89	-	-	360	101	H			
			*4.009366	47.07	ADR	33.5	0.00	-48.00	32.57	54	-21.43	-	-	360	101	V			
			*4.0156	58.88	PK-U	33.5	0.00	-47.76	44.62	-	-	74	-29.38	360	101	V			
			*15.872786	59.54	PK-U	40.6	0.00	-45.54	54.60	-	-	74	-19.4	360	200	V			
			*15.87701	47.56	ADR	40.6	0.00	-45.70	42.46	54	-11.54	-	-	360	200	V			
			*15.887739	47.49	ADR	40.7	0.00	-45.70	42.49	54	-11.51	-	-	360	200	H			
			*15.89825	59.34	PK-U	40.7	0.00	-45.92	54.12	-	-	74	-19.88	360	200	H			
			EHT20 (26T RU0)	6435	6+5	*1.137329	47.71	ADR	27.9	0.00	-47.83	27.78	54	-26.22	-	-	0	101	V
						*1.139044	47.92	ADR	27.9	0.00	-47.84	27.98	54	-26.02	-	-	0	101	H
						*1.139253	59.60	PK-U	27.9	0.00	-47.85	39.65	-	-	74	-34.35	0	101	H
						*1.143706	59.73	PK-U	28.0	0.00	-47.83	39.90	-	-	74	-34.1	0	101	V
						*11.821333	53.78	PK-U	38.6	0.00	-42.10	50.28	-	-	74	-23.72	0	101	V
						*11.837592	54.28	PK-U	38.6	0.00	-41.96	50.92	-	-	74	-23.08	0	101	H
						*11.844571	42.38	ADR	38.6	0.00	-42.12	38.86	54	-15.14	-	-	0	101	V
						*11.860402	42.51	ADR	38.6	0.00	-42.45	38.66	54	-15.34	-	-	0	101	H
						*3.842602	43.79	ADR	33.4	0.00	-45.13	32.06	54	-21.94	-	-	0	101	H
						*3.842903	55.55	PK-U	33.4	0.00	-45.14	43.81	-	-	74	-30.19	0	101	V
*3.842916		43.68				ADR	33.4	0.00	-45.14	31.94	54	-22.06	-	-	0	101	V		
*3.850441		55.43				PK-U	33.4	0.00	-44.92	43.91	-	-	74	-30.09	0	101	H		
EHT20 (26T RU4)	6475	6+5	*1.131250	59.18	PK-U	27.8	0.00	-47.79	39.19	-	-	74	-34.81	1	101	H			
			*1.133551	59.84	PK-U	27.8	0.00	-47.79	39.85	-	-	74	-34.15	1	101	V			
			*1.134200	47.93	ADR	27.8	0.00	-47.79	27.94	54	-26.06	-	-	1	101	V			
			*1.138445	48.08	ADR	27.9	0.00	-47.83	28.15	54	-25.85	-	-	1	101	H			
			*11.815966	42.41	ADR	38.6	0.00	-42.25	38.76	54	-15.24	-	-	1	101	H			
			*11.830585	42.28	ADR	38.6	0.00	-41.96	38.92	54	-15.08	-	-	1	101	V			
			*11.837760	54.37	PK-U	38.6	0.00	-41.96	51.01	-	-	74	-22.99	1	101	H			
			*11.840892	54.44	PK-U	38.6	0.00	-42.02	51.02	-	-	74	-22.98	1	101	V			
			*3.840695	43.80	ADR	33.4	0.00	-45.11	32.09	54	-21.91	-	-	1	101	V			
			*3.841214	43.71	ADR	33.4	0.00	-45.12	31.99	54	-22.01	-	-	1	101	H			
			*3.853170	55.44	PK-U	33.5	0.00	-44.95	43.99	-	-	74	-30.01	1	101	V			
			*3.853444	55.47	PK-U	33.5	0.00	-44.95	44.02	-	-	74	-29.98	1	101	H			
EHT20 (26T RU8)	6515	6+5	*1.133604	47.79	ADR	27.8	0.00	-47.79	27.80	54	-26.2	-	-	0	101	V			
			*1.138183	47.87	ADR	27.9	0.00	-47.83	27.94	54	-26.06	-	-	0	101	H			
			*1.138743	60.55	PK-U	27.9	0.00	-47.84	40.61	-	-	74	-33.39	0	101	H			
			*1.138910	59.97	PK-U	27.9	0.00	-47.84	40.03	-	-	74	-33.97	0	101	V			
			*11.807914	42.19	ADR	38.6	0.00	-42.45	38.34	54	-15.66	-	-	0	101	V			
			*11.829536	53.85	PK-U	38.6	0.00	-41.96	50.49	-	-	74	-23.51	0	101	V			
			*11.887990	54.09	PK-U	38.7	0.00	-41.87	50.92	-	-	74	-23.08	0	101	H			
			*11.904212	42.41	ADR	38.7	0.00	-41.87	39.24	54	-14.76	-	-	0	101	H			
			*3.838106	43.74	ADR	33.4	0.00	-45.06	32.08	54	-21.92	-	-	0	101	H			
			*3.841053	55.39	PK-U	33.4	0.00	-45.12	43.67	-	-	74	-30.33	0	101	H			
			*3.846369	43.83	ADR	33.4	0.00	-45.04	32.19	54	-21.81	-	-	0	101	V			
			*3.853070	55.41	PK-U	33.5	0.00	-44.95	43.96	-	-	74	-30.04	0	101	V			

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

STATE B 20MHz- Cont.

UNII-6 (MIMO CDD)	Channel Frequency MHz	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbt/Fl tr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (106T RU53)	6435	6+5	1.990286	61.88	PK-U	32.00	0.00	-48.70	45.18	-	-	88.2	-43.02	360	199	H
			1.994561	49.94	ADR	32.00	0.00	-48.60	33.34	68.2	-34.86	-	-	360	199	H
			* 4.308614	58.08	PK-U	33.90	0.00	-47.54	44.44	-	-	74	-29.56	360	199	H
			* 4.293691	46.45	ADR	33.90	0.00	-47.37	32.98	54	-21.02	-	-	360	199	H
			1.997983	61.70	PK-U	32.10	0.00	-48.70	45.1	-	-	88.2	-43.1	360	101	V
			1.996138	49.87	ADR	32.00	0.00	-48.61	33.26	68.2	-34.94	-	-	360	101	V
			* 4.306188	57.97	PK-U	33.90	0.00	-47.50	44.37	-	-	74	-29.63	360	101	V
			* 4.287066	46.37	ADR	33.90	0.00	-47.30	32.97	54	-21.03	-	-	360	101	V
			* 16.041450	53.75	PK-U	41.10	0.00	-41.40	53.45	-	-	74	-20.55	360	101	H
			* 16.037414	41.79	ADR	41.10	0.00	-41.40	41.49	54	-12.51	-	-	360	101	H
			* 16.039394	53.74	PK-U	41.10	0.00	-41.40	53.44	-	-	74	-20.56	360	101	V
			* 16.027199	41.84	ADR	41.00	0.00	-41.40	41.44	54	-12.56	-	-	360	101	V
	3.234929		58.13	PK-U	32.8	0.00	-47.40	43.53	-	-	88.2	-44.67	360	101	H	
	3.239004		46.65	ADR	32.8	0.00	-47.30	32.15	68.2	-36.05	-	-	360	101	H	
	2.164966		61.28	PK-U	31.7	0.00	-49.30	43.68	-	-	88.2	-44.52	360	101	H	
	2.165068		49.68	ADR	31.7	0.00	-49.30	32.08	68.2	-36.12	-	-	360	101	H	
	3.241203		58.53	PK-U	32.8	0.00	-47.40	43.93	-	-	88.2	-44.27	360	101	V	
	3.241848		46.77	ADR	32.8	0.00	-47.40	32.17	68.2	-36.03	-	-	360	101	V	
	2.160554		61.36	PK-U	31.7	0.00	-49.30	43.76	-	-	88.2	-44.44	360	101	V	
	2.162464		49.51	ADR	31.7	0.00	-49.30	31.91	68.2	-36.29	-	-	360	101	V	
	12.963091		54.20	PK-U	38.9	0.00	-42.61	50.49	-	-	88.2	-37.71	360	101	H	
	12.967815		42.58	ADR	38.9	0.00	-42.70	38.78	68.2	-29.42	-	-	360	101	H	
	12.951404		53.76	PK-U	38.9	0.00	-42.70	49.96	-	-	88.2	-38.24	360	101	V	
	12.948816		42.57	ADR	38.9	0.00	-42.70	38.77	68.2	-29.43	-	-	360	101	V	
EHT20 (106T RU54)	6515	6+5	1.752846	47.75	ADR	30.0	0.00	-47.90	29.85	68.2	-38.35	-	-	360	101	H
			1.753335	47.87	ADR	30.0	0.00	-47.90	29.97	68.2	-38.23	-	-	360	101	V
			1.755553	59.66	PK-U	30.0	0.00	-47.90	41.76	-	-	88.2	-46.44	360	101	V
			1.763036	59.14	PK-U	30.1	0.00	-47.83	41.41	-	-	88.2	-46.79	360	101	H
			3.391843	55.02	PK-U	32.8	0.00	-45.07	42.75	-	-	88.2	-45.45	360	101	H
			3.402135	43.37	ADR	32.8	0.00	-45.00	31.17	68.2	-37.03	-	-	360	101	H
			3.403100	55.25	PK-U	32.8	0.00	-45.02	43.03	-	-	88.2	-45.17	360	200	V
			3.416286	43.35	ADR	32.8	0.00	-44.97	31.18	68.2	-37.02	-	-	360	200	V
			*11.287524	42.86	ADR	37.9	0.00	-43.07	37.69	54	-16.31	-	-	360	101	H
			*11.299647	54.67	PK-U	38.0	0.00	-42.96	49.71	-	-	74	-24.29	360	101	H
			*11.306691	54.22	PK-U	38.0	0.00	-42.88	49.34	-	-	74	-24.66	360	200	V
			*11.313946	42.87	ADR	38.0	0.00	-42.81	38.06	54	-15.94	-	-	360	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

STATE A 40MHz

UNII-6 (MIMO CDD)	Channel Frequency MHz	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbt/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT40 (SU Mode)	6445	6+5	* 2.238634	49.65	ADR	31.5	0.00	-49.96	31.19	54	-22.81	-	-	360	200	V
			* 2.246447	61.55	PK-U	31.5	0.00	-50.13	42.92	-	-	74	-31.08	360	200	V
			* 2.251185	61.36	PK-U	31.5	0.00	-50.10	42.76	-	-	74	-31.24	360	200	H
			* 2.255971	49.62	ADR	31.5	0.00	-50.29	30.83	54	-23.17	-	-	360	200	H
			* 4.720990	47.72	ADR	34.1	0.00	-49.00	32.82	54	-21.18	-	-	360	101	H
			* 4.721492	59.03	PK-U	34.1	0.00	-49.05	44.08	-	-	74	-29.92	360	101	H
			* 4.753644	59.85	PK-U	34.2	0.00	-49.07	44.98	-	-	74	-29.02	360	200	V
			* 4.759341	47.58	ADR	34.2	0.00	-48.97	32.81	54	-21.19	-	-	360	200	V
			* 15.943403	59.62	PK-U	40.7	0.00	-45.44	54.88	-	-	74	-19.12	360	200	V
			* 15.946994	47.51	ADR	40.7	0.00	-45.90	42.31	54	-11.69	-	-	360	200	V
			* 15.954334	59.37	PK-U	40.7	0.00	-45.57	54.50	-	-	74	-19.5	360	200	H
			* 15.960165	47.72	ADR	40.7	0.00	-45.40	43.02	54	-10.98	-	-	360	200	H
	6485		* 2.237406	49.72	ADR	31.5	0.00	-50.20	31.02	54	-22.98	-	-	360	200	V
			* 2.240273	61.10	PK-U	31.5	0.00	-49.96	42.64	-	-	74	-31.36	360	200	V
			* 2.251189	61.30	PK-U	31.5	0.00	-50.10	42.70	-	-	74	-31.3	360	200	H
			* 2.253646	49.53	ADR	31.5	0.00	-50.12	30.91	54	-23.09	-	-	360	200	H
			* 4.717601	47.83	ADR	34.1	0.00	-48.92	33.01	54	-20.99	-	-	360	101	V
			* 4.720996	47.64	ADR	34.1	0.00	-49.00	32.74	54	-21.26	-	-	360	200	H
			* 4.723569	59.30	PK-U	34.1	0.00	-49.04	44.36	-	-	74	-29.64	360	200	H
			* 4.727231	60.14	PK-U	34.2	0.00	-48.85	45.49	-	-	74	-28.51	360	101	V
			* 15.798886	58.83	PK-U	40.6	0.00	-45.62	53.81	-	-	74	-20.19	360	199	H
			* 15.800926	59.15	PK-U	40.6	0.00	-45.38	54.37	-	-	74	-19.63	360	101	V
			* 15.808257	47.21	ADR	40.6	0.00	-45.47	42.34	54	-11.66	-	-	360	199	H
			* 15.815144	47.29	ADR	40.6	0.00	-45.23	42.66	54	-11.34	-	-	360	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

STATE B 40MHz

UNII-6 (MIMO CDD)	Channel Frequency MHz	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cb/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT40 (SU Mode)	6445	6+5	2.183468	49.70	ADR	31.4	0.00	-50.25	30.85	68.2	-37.35	-	-	360	200	V
			2.186030	49.96	ADR	31.4	0.00	-50.30	31.06	68.2	-37.14	-	-	360	101	H
			2.187741	61.49	PK-U	31.4	0.00	-50.33	42.56	-	-	88.2	-45.64	360	101	H
			2.194178	61.48	PK-U	31.4	0.00	-50.13	42.75	-	-	88.2	-45.45	360	200	V
			*4.000153	58.74	PK-U	33.5	0.00	-47.90	44.34	-	-	74	-29.66	360	200	H
			*4.002201	47.21	ADR	33.5	0.00	-47.64	33.07	54	-20.93	-	-	360	101	V
			*4.008592	47.10	ADR	33.5	0.00	-48.04	32.56	54	-21.44	-	-	360	200	H
			*4.010098	58.90	PK-U	33.5	0.00	-48.00	44.40	-	-	74	-29.6	360	101	V
			*16.008944	59.24	PK-U	40.8	0.00	-45.97	54.07	-	-	74	-19.93	360	199	V
			*16.00992	59.41	PK-U	40.8	0.00	-46.00	54.21	-	-	74	-19.79	360	101	H
			*16.011088	47.68	ADR	40.8	0.00	-45.68	42.80	54	-11.2	-	-	360	101	H
			*16.01446	47.43	ADR	40.8	0.00	-45.81	42.42	54	-11.58	-	-	360	199	V
	6485		*2.207186	49.41	ADR	31.4	0.00	-50.26	30.55	54	-23.45	-	-	360	101	V
			*2.219985	61.60	PK-U	31.5	0.00	-50.20	42.90	-	-	74	-31.1	360	101	H
			*2.229286	49.62	ADR	31.5	0.00	-50.07	31.05	54	-22.95	-	-	360	101	H
			*2.23876	61.13	PK-U	31.5	0.00	-49.98	42.65	-	-	74	-31.35	360	101	V
			*4.777998	47.83	ADR	34.2	0.00	-49.00	33.03	54	-20.97	-	-	360	200	H
			*4.779579	47.84	ADR	34.2	0.00	-49.16	32.88	54	-21.12	-	-	360	200	V
			*4.806222	59.89	PK-U	34.2	0.00	-49.04	45.05	-	-	74	-28.95	360	200	H
			*4.810189	59.77	PK-U	34.1	0.00	-48.96	44.91	-	-	74	-29.09	360	200	V
			*15.885011	59.50	PK-U	40.7	0.00	-45.80	54.40	-	-	74	-19.6	360	101	H
			*15.885427	47.63	ADR	40.7	0.00	-45.71	42.62	54	-11.38	-	-	360	101	H
			*15.897482	59.35	PK-U	40.7	0.00	-45.74	54.31	-	-	74	-19.69	360	199	V
			*15.899714	47.55	ADR	40.7	0.00	-45.93	42.32	54	-11.68	-	-	360	199	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

STATE A 80MHz

UNII-6 (MIMO CDD)	Channel Frequency MHz	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbt/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT80 (SU Mode)	6465	6+5	* 2.249691	49.82	ADR	31.5	0.00	-49.96	31.36	54	-22.64	-	-	0	101	V
			* 2.264512	61.93	PK-U	31.5	0.00	-50.20	43.23	-	-	74	-30.77	0	101	V
			* 2.265301	49.58	ADR	31.5	0.00	-49.91	31.17	54	-22.83	-	-	0	101	H
			* 2.273278	61.34	PK-U	31.6	0.00	-49.86	43.08	-	-	74	-30.92	0	101	H
			* 3.666140	46.48	ADR	33.4	0.00	-47.81	32.07	54	-21.93	-	-	0	101	H
			* 3.679333	58.20	PK-U	33.3	0.00	-47.83	43.67	-	-	74	-30.33	0	101	V
			* 3.701975	46.43	ADR	33.3	0.00	-47.90	31.83	54	-22.17	-	-	0	101	V
			* 3.703456	58.15	PK-U	33.3	0.00	-47.98	43.47	-	-	74	-30.53	0	101	H
			* 11.058660	58.52	PK-U	37.8	0.00	-44.97	51.35	-	-	74	-22.65	0	101	H
			* 11.063235	46.66	ADR	37.9	0.00	-44.88	39.68	54	-14.32	-	-	0	101	V
			* 11.063879	46.68	ADR	37.9	0.00	-44.81	39.77	54	-14.23	-	-	0	101	H
			* 11.067363	58.23	PK-U	37.9	0.00	-44.90	51.23	-	-	74	-22.77	0	101	V
EHT80 (484+242T RU93)	6465	6+5	* 1.456214	59.27	PK-U	28.2	0.00	-47.44	40.03	-	-	74	-33.97	1	101	V
			* 1.456696	58.95	PK-U	28.2	0.00	-47.44	39.71	-	-	74	-34.29	1	101	H
			* 1.459089	59.01	PK-U	28.1	0.00	-47.45	39.66	-	-	74	-34.34	1	101	V
			* 1.460147	47.38	ADR	28.1	0.00	-47.45	28.03	54	-25.97	-	-	1	101	V
			* 1.461909	47.44	ADR	28.1	0.00	-47.46	28.08	54	-25.92	-	-	1	101	H
			* 1.464166	47.27	ADR	28.1	0.00	-47.45	27.92	54	-26.08	-	-	1	101	H
			* 1.466890	59.34	PK-U	28.1	0.00	-47.45	39.99	-	-	74	-34.01	1	101	H
			* 1.467826	47.37	ADR	28.0	0.00	-47.45	27.92	54	-26.08	-	-	1	101	V
			2.582619	45.98	ADR	32.6	0.00	-46.87	31.71	68.2	-36.49	-	-	1	101	V
			2.590321	45.80	ADR	32.6	0.00	-46.89	31.51	68.2	-36.69	-	-	1	101	H
			2.593592	57.54	PK-U	32.6	0.00	-46.89	43.25	-	-	88.2	-44.95	1	101	H
			2.596231	57.55	PK-U	32.6	0.00	-46.85	43.30	-	-	88.2	-44.9	1	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

STATE B 80MHz

UNII-6 (MIMO CDD)	Channel Frequency MHz	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbt/ Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT80 (SU Mode)	6465	6+5	*2.23553	61.41	PK-U	31.5	0.00	-50.17	42.74	-	-	74	-31.26	0	101	V
			*2.241396	49.76	ADR	31.5	0.00	-49.64	31.62	54	-22.38	-	-	0	101	V
			*2.243475	61.74	PK-U	31.5	0.00	-49.85	43.39	-	-	74	-30.61	0	101	H
			*2.245835	49.59	ADR	31.5	0.00	-49.98	31.11	54	-22.89	-	-	0	101	H
			*3.647895	58.28	PK-U	33.6	0.00	-47.69	44.19	-	-	74	-29.81	0	101	V
			*3.650393	58.28	PK-U	33.6	0.00	-47.92	43.96	-	-	74	-30.04	0	101	H
			*3.653335	46.64	ADR	33.6	0.00	-47.83	32.41	54	-21.59	-	-	0	101	H
			*3.658658	46.58	ADR	33.5	0.00	-47.83	32.25	54	-21.75	-	-	0	101	V
			*11.070715	46.51	ADR	37.9	0.00	-44.66	39.75	54	-14.25	-	-	0	101	H
			*11.073191	58.24	PK-U	37.9	0.00	-44.86	51.28	-	-	74	-22.72	0	101	H
			*11.080179	58.54	PK-U	37.9	0.00	-44.32	52.12	-	-	74	-21.88	0	101	V
			*11.089026	46.54	ADR	37.9	0.00	-44.39	40.05	54	-13.95	-	-	0	101	V
			*2.363449	60.62	PK-U	32.2	0.00	-48.90	43.92	-	-	74	-30.08	1	200	H
			*2.333372	48.92	ADR	32.1	0.00	-49.00	32.02	54	-21.98	-	-	1	200	H
EHT80 (484+242T RU93)	6465	6+5	3.095028	59.09	PK-U	33.1	0.00	-47.50	44.69	-	-	88.2	-43.51	1	200	H
			3.084345	46.90	ADR	33.1	0.00	-47.60	32.40	68.2	-35.8	-	-	1	200	H
			*2.337409	60.81	PK-U	32.1	0.00	-48.96	43.95	-	-	74	-30.05	1	200	V
			*2.338044	48.81	ADR	32.1	0.00	-48.90	32.01	54	-21.99	-	-	1	200	V
			3.089644	58.72	PK-U	33.1	0.00	-47.60	44.22	-	-	88.2	-43.98	1	101	V
			3.065354	46.74	ADR	33.1	0.00	-47.60	32.24	68.2	-35.96	-	-	1	101	V
			*11.298330	55.54	PK-U	37.8	0.00	-44.37	48.97	-	-	74	-25.03	1	199	H
			*11.297846	44.01	ADR	37.8	0.00	-44.40	37.41	54	-16.59	-	-	1	199	H
			*11.266745	55.76	PK-U	37.8	0.00	-44.20	49.36	-	-	74	-24.64	1	199	V
			*11.297534	44.09	ADR	37.8	0.00	-44.40	37.49	54	-16.51	-	-	1	199	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

STATE A 160MHz

UNII-6 (MIMO CDD)	Channel Frequency MHz	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cb/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT160 (SU Mode)	6505	6+5	2.177810	57.91	PK-U	31.8	0.00	-47.21	42.50	-	-	88.2	-45.7	0	101	H
			2.181050	46.19	ADR	31.9	0.00	-47.20	30.89	68.2	-37.31	-	-	0	101	H
			2.184394	46.34	ADR	31.9	0.00	-47.20	31.04	68.2	-37.16	-	-	0	101	V
			2.187167	58.05	PK-U	31.9	0.00	-47.23	42.72	-	-	88.2	-45.48	0	101	V
			2.188669	46.06	ADR	31.9	0.00	-47.25	30.71	68.2	-37.49	-	-	0	101	V
			2.191340	57.97	PK-U	31.9	0.00	-47.26	42.61	-	-	88.2	-45.59	0	101	V
			* 4.696444	44.06	ADR	34.1	0.00	-45.36	32.80	54	-21.2	-	-	0	199	H
			* 4.705505	43.93	ADR	34.2	0.00	-45.38	32.75	54	-21.25	-	-	0	199	V
			* 4.705848	55.93	PK-U	34.2	0.00	-45.38	44.75	-	-	74	-29.25	0	199	V
			* 4.717611	55.77	PK-U	34.2	0.00	-45.38	44.59	-	-	74	-29.41	0	199	H
			* 15.717270	42.51	ADR	40.5	0.00	-40.45	42.56	54	-11.44	-	-	0	101	H
			* 15.724713	54.13	PK-U	40.5	0.00	-40.44	54.19	-	-	74	-19.81	0	101	H
			* 15.727593	54.11	PK-U	40.5	0.00	-40.49	54.12	-	-	74	-19.88	0	200	V
			* 15.728725	42.82	ADR	40.5	0.00	-40.53	42.79	54	-11.21	-	-	0	200	V
			1.972427	46.26	ADR	31.4	0.00	-46.52	31.14	68.2	-37.06	-	-	360	101	H
EHT160 (996+484+242T RU99)	6505	6+5	1.973097	46.32	ADR	31.4	0.00	-46.52	31.20	68.2	-37	-	-	360	101	V
			1.973413	58.12	PK-U	31.4	0.00	-46.52	43.00	-	-	88.2	-45.2	360	101	V
			1.975467	57.98	PK-U	31.4	0.00	-46.52	42.86	-	-	88.2	-45.34	360	101	H
			3.431384	55.45	PK-U	32.6	0.00	-44.87	43.18	-	-	88.2	-45.02	360	101	H
			3.438968	43.17	ADR	32.6	0.00	-44.88	30.89	68.2	-37.31	-	-	360	200	V
			3.440324	54.84	PK-U	32.6	0.00	-44.88	42.56	-	-	88.2	-45.64	360	200	V
			3.450080	43.48	ADR	32.6	0.00	-44.90	31.18	68.2	-37.02	-	-	360	101	H
			13.899516	42.69	ADR	39.1	0.00	-41.93	39.86	68.2	-28.34	-	-	360	101	V
			13.900340	42.80	ADR	39.1	0.00	-41.93	39.97	68.2	-28.23	-	-	360	200	H
			13.905460	54.41	PK-U	39.1	0.00	-41.91	51.60	-	-	88.2	-36.6	360	200	H
			13.906736	54.42	PK-U	39.1	0.00	-41.91	51.61	-	-	88.2	-36.59	360	101	V
			* 3.973776	57.57	PK-U	33.3	0.00	-47.63	43.24	-	-	74	-30.76	360	101	H
EHT160 (996+484T RU95)	6505	6+5	* 3.960173	45.86	ADR	33.3	0.00	-47.63	31.53	54	-22.47	-	-	360	101	H
			* 3.974750	57.51	PK-U	33.3	0.00	-47.62	43.19	-	-	74	-30.81	360	101	V
			* 3.971968	45.97	ADR	33.3	0.00	-47.61	31.66	54	-22.34	-	-	360	101	V
			* 11.481834	54.95	PK-U	38.1	0.00	-44.09	48.96	-	-	74	-25.04	360	101	H
			* 11.497184	43.37	ADR	38.2	0.00	-44.30	37.27	54	-16.73	-	-	360	101	H
			* 15.821969	54.44	PK-U	41.1	0.00	-42.32	53.22	-	-	74	-20.78	360	101	H
			* 15.834248	42.45	ADR	41.1	0.00	-42.29	41.26	54	-12.74	-	-	360	101	H
			* 11.469999	55.63	PK-U	38.1	0.00	-43.91	49.82	-	-	74	-24.18	360	101	V
			* 11.486969	43.28	ADR	38.2	0.00	-44.14	37.34	54	-16.66	-	-	360	101	V
			* 15.815550	54.19	PK-U	41.1	0.00	-42.29	53.00	-	-	74	-21	360	101	V
			* 15.845359	42.41	ADR	41.2	0.00	-42.32	41.29	54	-12.71	-	-	360	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

STATE B 160MHz

UNII-6 (MIMO CDD)	Channel Frequency MHz	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cb/ Filt/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT160 (SU Mode)	6505	6+5	*2.24392	46.31	ADR	32.2	0.00	-47.59	30.92	54	-23.08	-	-	0	200	H
			*2.247306	58.11	PK-U	32.2	0.00	-47.60	42.71	-	-	74	-31.29	0	200	H
			*2.250113	58.26	PK-U	32.2	0.00	-47.62	42.84	-	-	74	-31.16	0	101	V
			*2.250868	46.39	ADR	32.2	0.00	-47.61	30.98	54	-23.02	-	-	0	101	V
			*4.75817	43.89	ADR	34.2	0.00	-45.18	32.91	54	-21.09	-	-	0	101	H
			*4.759382	44.02	ADR	34.2	0.00	-45.19	33.03	54	-20.97	-	-	0	101	V
			*4.787556	55.64	PK-U	34.2	0.00	-44.99	44.85	-	-	74	-29.15	0	101	V
			*4.790553	55.30	PK-U	34.2	0.00	-44.98	44.52	-	-	74	-29.48	0	101	H
			*15.963958	53.72	PK-U	40.8	0.00	-40.87	53.65	-	-	74	-20.35	0	200	V
			*15.967053	54.03	PK-U	40.8	0.00	-40.96	53.87	-	-	74	-20.13	0	101	H
			*15.973185	53.78	PK-U	40.8	0.00	-41.06	53.52	-	-	74	-20.48	0	200	V
			*15.976409	42.10	ADR	40.8	0.00	-41.19	41.71	54	-12.29	-	-	0	200	V
			*15.979784	41.99	ADR	40.8	0.00	-41.22	41.57	54	-12.43	-	-	0	101	H
			*15.980792	42.19	ADR	40.8	0.00	-41.27	41.72	54	-12.28	-	-	0	200	V
EHT160 (996+484+242T RU99)	6505	6+5	* 1.308630	31.26	ADR	29.3	0.00	-27.51	33.07	54	-20.93	-	-	0	201	V
			* 1.330265	42.91	PK-U	29.2	0.00	-27.48	44.63	-	-	74	-29.37	0	201	V
			* 1.334478	31.23	ADR	29.2	0.00	-27.44	32.99	54	-21.01	-	-	0	100	H
			* 1.349419	43.06	PK-U	29.1	0.00	-27.42	44.74	-	-	74	-29.26	0	100	H
			* 11.882840	44.62	ADR	38.7	0.00	-44.48	38.84	54	-15.16	-	-	0	100	H
			* 11.894117	56.35	PK-U	38.7	0.00	-44.20	50.85	-	-	74	-23.15	0	100	H
			* 11.908797	44.44	ADR	38.8	0.00	-43.99	39.25	54	-14.75	-	-	0	201	V
			* 11.918300	55.87	PK-U	38.8	0.00	-44.04	50.63	-	-	74	-23.37	0	201	V
			* 4.787796	31.71	ADR	34.4	0.00	-24.73	41.38	54	-12.62	-	-	0	200	V
			* 4.792839	43.38	PK-U	34.4	0.00	-24.79	52.99	-	-	74	-21.01	0	200	V
			* 4.796174	43.84	PK-U	34.4	0.00	-24.77	53.47	-	-	74	-20.53	0	100	H
EHT160 (996+484T RU95)	6505	6+5	* 4.806665	32.02	ADR	34.4	0.00	-24.94	41.48	54	-12.52	-	-	0	100	H
			1.915586	58.03	PK-U	31.1	0.00	-46.20	42.93	-	-	88.2	-45.27	0	200	V
			1.917511	46.50	ADR	31.1	0.00	-46.25	31.35	68.2	-36.85	-	-	0	200	V
			1.918075	46.35	ADR	31.1	0.00	-46.30	31.15	68.2	-37.05	-	-	0	200	H
			1.918186	58.27	PK-U	31.1	0.00	-46.30	43.07	-	-	88.2	-45.13	0	200	H
			10.041459	42.19	ADR	37.7	0.00	-42.75	37.14	68.2	-31.06	-	-	0	200	V
			10.042926	42.52	ADR	37.7	0.00	-42.79	37.43	68.2	-30.77	-	-	0	101	H
			10.049517	54.56	PK-U	37.7	0.00	-42.75	49.51	-	-	88.2	-38.69	0	101	H
			10.057893	53.78	PK-U	37.7	0.00	-42.61	48.87	-	-	88.2	-39.33	0	200	V
			13.931544	55.08	PK-U	39.0	0.00	-42.25	51.83	-	-	88.2	-36.37	0	101	H
			13.932424	43.35	ADR	39.0	0.00	-42.20	40.15	68.2	-28.05	-	-	0	101	H
			13.989561	43.48	ADR	39.0	0.00	-42.54	39.94	68.2	-28.26	-	-	0	200	V
			14.007140	55.43	PK-U	39.0	0.00	-42.41	52.02	-	-	88.2	-36.18	0	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band



PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

WORST-CASE HARMONICS AND SPURIOUS EMISSIONS

STATE A

802.11be EHT40 / 99 & 6445 / 2TX / CDD / SU

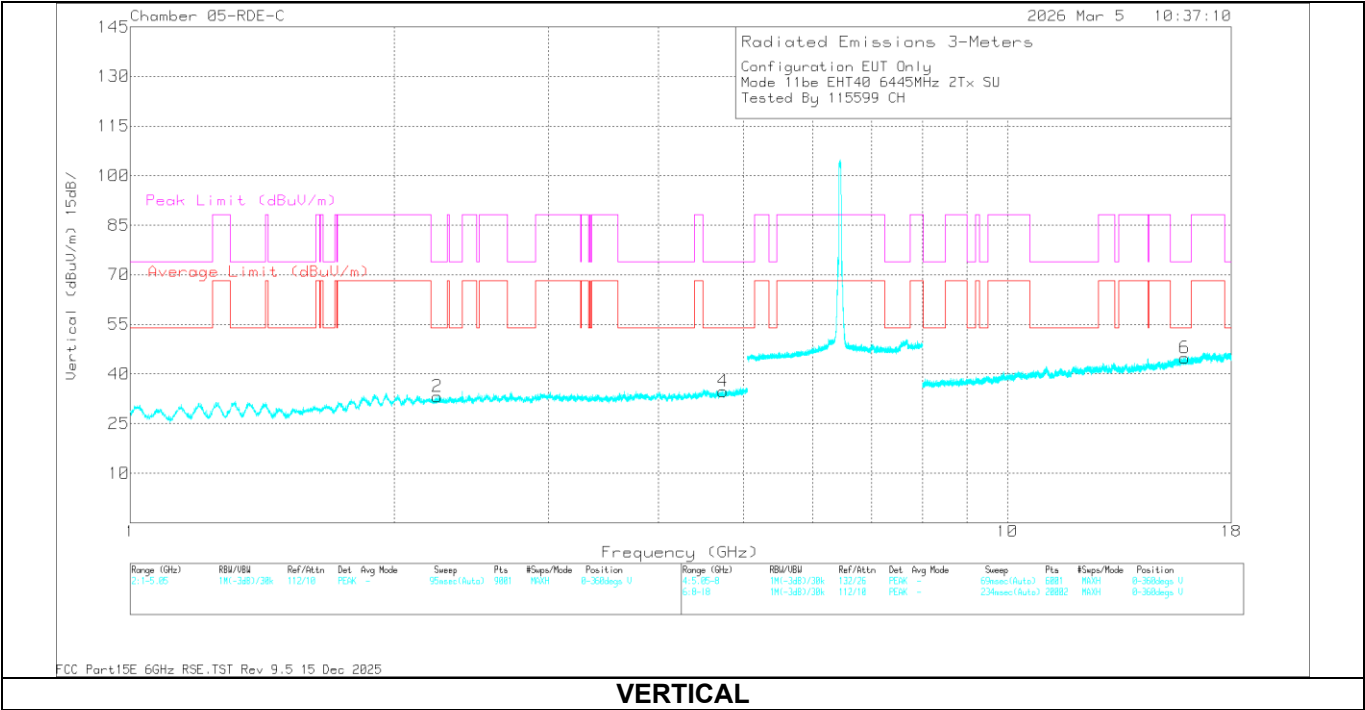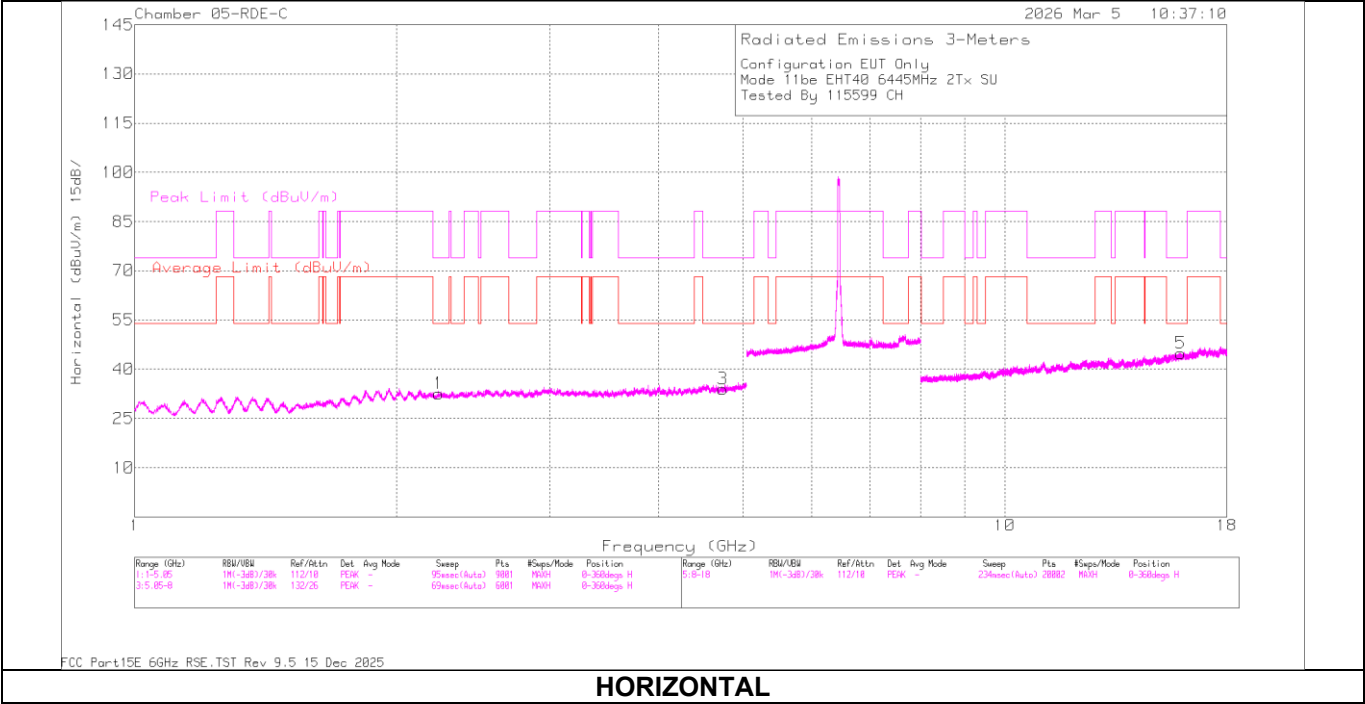

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbt/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 2.238634	49.65	ADR	31.5	0.00	-49.96	31.19	54	-22.81	-	-	360	200	V
* 2.246447	61.55	PK-U	31.5	0.00	-50.13	42.92	-	-	74	-31.08	360	200	V
* 2.251185	61.36	PK-U	31.5	0.00	-50.10	42.76	-	-	74	-31.24	360	200	H
* 2.255971	49.62	ADR	31.5	0.00	-50.29	30.83	54	-23.17	-	-	360	200	H
* 4.720990	47.72	ADR	34.1	0.00	-49.00	32.82	54	-21.18	-	-	360	101	H
* 4.721492	59.03	PK-U	34.1	0.00	-49.05	44.08	-	-	74	-29.92	360	101	H
* 4.753644	59.85	PK-U	34.2	0.00	-49.07	44.98	-	-	74	-29.02	360	200	V
* 4.759341	47.58	ADR	34.2	0.00	-48.97	32.81	54	-21.19	-	-	360	200	V
* 15.943403	59.62	PK-U	40.7	0.00	-45.44	54.88	-	-	74	-19.12	360	200	V
* 15.946994	47.51	ADR	40.7	0.00	-45.90	42.31	54	-11.69	-	-	360	200	V
* 15.954334	59.37	PK-U	40.7	0.00	-45.57	54.50	-	-	74	-19.5	360	200	H
* 15.960165	47.72	ADR	40.7	0.00	-45.40	43.02	54	-10.98	-	-	360	200	H



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

STATE B

802.11be EHT40 / 99 & 6445 / 2TX / CDD / SU

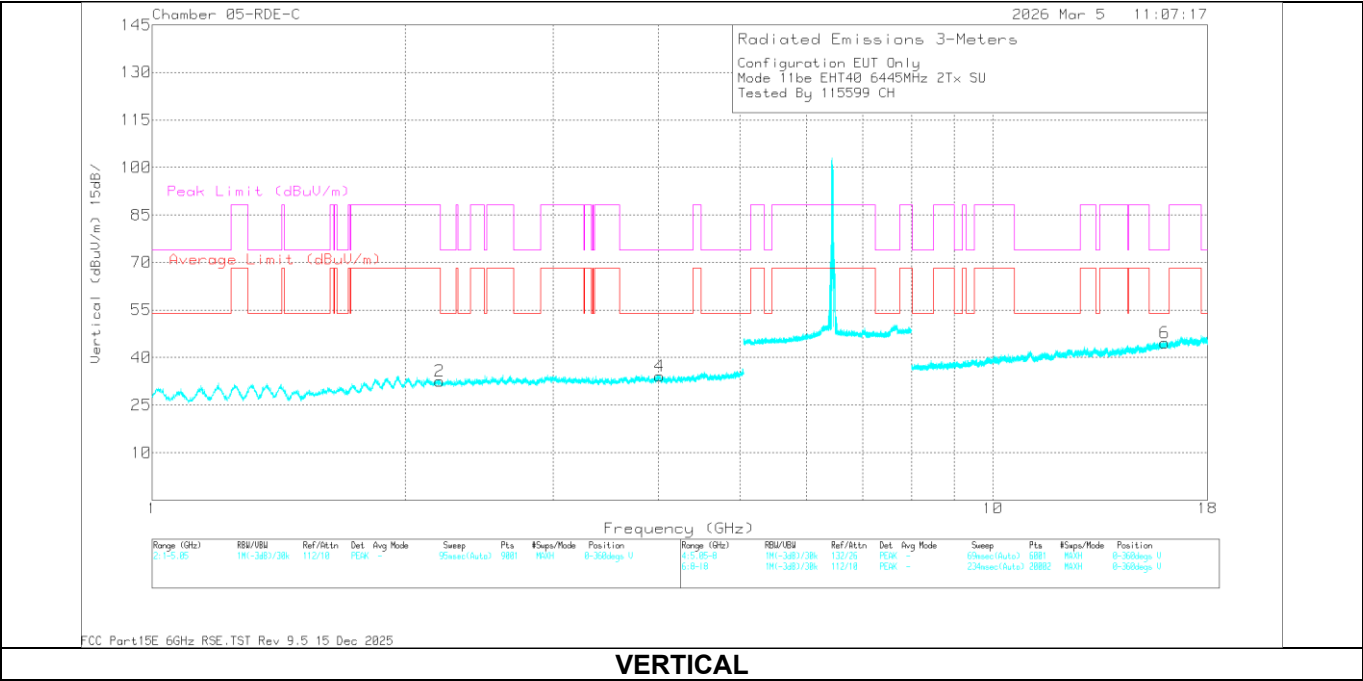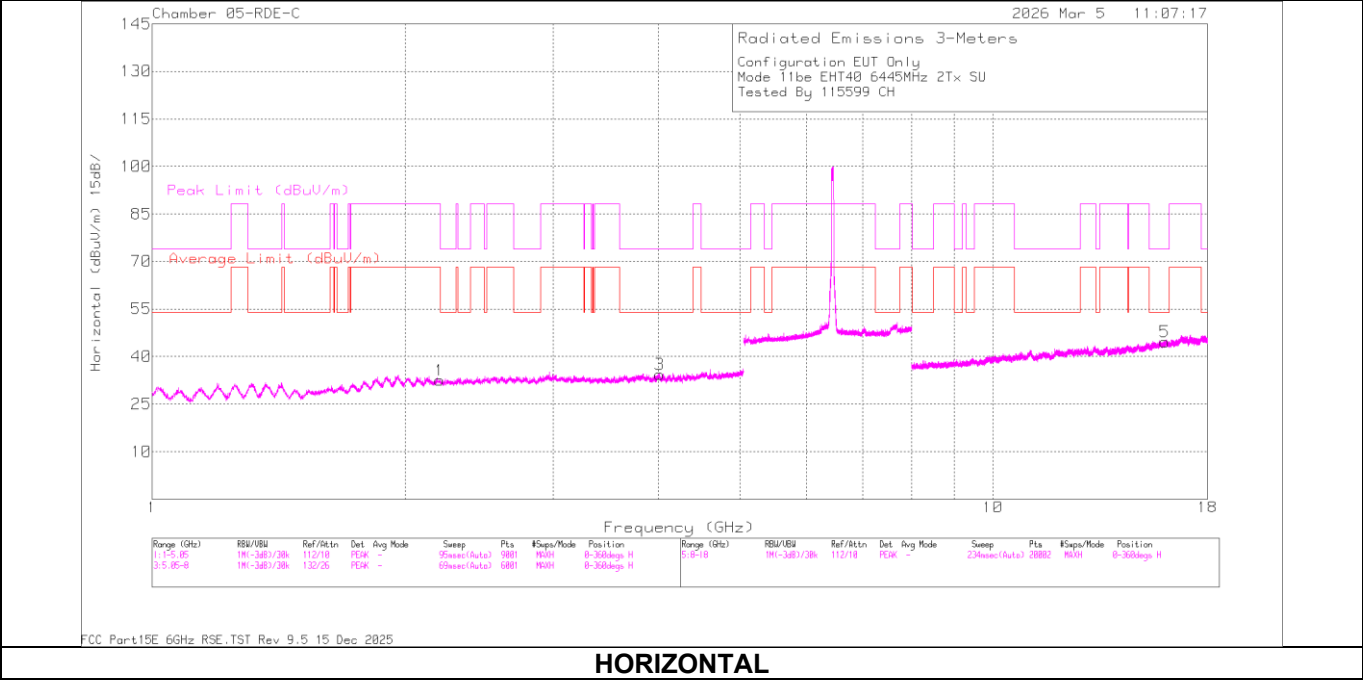

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbt/ Fltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2.183468	49.70	ADR	31.4	0.00	-50.25	30.85	68.2	-37.35	-	-	360	200	V
2.186030	49.96	ADR	31.4	0.00	-50.30	31.06	68.2	-37.14	-	-	360	101	H
2.187741	61.49	PK-U	31.4	0.00	-50.33	42.56	-	-	88.2	-45.64	360	101	H
2.194178	61.48	PK-U	31.4	0.00	-50.13	42.75	-	-	88.2	-45.45	360	200	V
*4.000153	58.74	PK-U	33.5	0.00	-47.90	44.34	-	-	74	-29.66	360	200	H
*4.002201	47.21	ADR	33.5	0.00	-47.64	33.07	54	-20.93	-	-	360	101	V
*4.008592	47.10	ADR	33.5	0.00	-48.04	32.56	54	-21.44	-	-	360	200	H
*4.010098	58.90	PK-U	33.5	0.00	-48.00	44.40	-	-	74	-29.6	360	101	V
*16.008944	59.24	PK-U	40.8	0.00	-45.97	54.07	-	-	74	-19.93	360	199	V
*16.00992	59.41	PK-U	40.8	0.00	-46.00	54.21	-	-	74	-19.79	360	101	H
*16.011088	47.68	ADR	40.8	0.00	-45.68	42.80	54	-11.2	-	-	360	101	H
*16.01446	47.43	ADR	40.8	0.00	-45.81	42.42	54	-11.58	-	-	360	199	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.1.7. 802.11be MIMO MODE IN UNII-7 BAND – SPURIOUS EMISSIONS

STATE A 20MHz

UNII-7 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	6535	6 + 5	2.184517	49.93	ADR	31.4	0.00	-50.25	31.08	68.2	-37.12	-	-	360	101	V
			2.188310	61.58	PK-U	31.4	0.00	-50.14	42.84	-	-	88.2	-45.36	360	101	H
			2.188899	61.51	PK-U	31.4	0.00	-49.85	43.06	-	-	88.2	-45.14	360	101	V
			2.193421	49.78	ADR	31.4	0.00	-50.08	31.10	68.2	-37.1	-	-	360	101	H
			* 4.547201	59.52	PK-U	34.1	0.00	-48.50	45.12	-	-	74	-28.88	360	199	H
			* 4.553106	47.65	ADR	34.1	0.00	-48.62	33.13	54	-20.87	-	-	360	101	V
			* 4.556315	47.71	ADR	34.1	0.00	-48.40	33.41	54	-20.59	-	-	360	199	H
			* 4.576139	59.45	PK-U	34.1	0.00	-48.24	45.31	-	-	74	-28.69	360	101	V
			* 15.827421	59.07	PK-U	40.6	0.00	-45.44	54.23	-	-	74	-19.77	360	200	H
			* 15.860214	47.45	ADR	40.6	0.00	-45.60	42.45	54	-11.55	-	-	360	200	H
			* 15.864558	59.15	PK-U	40.6	0.00	-45.66	54.09	-	-	74	-19.91	360	101	V
			* 15.865938	47.32	ADR	40.6	0.00	-45.79	42.13	54	-11.87	-	-	360	101	V
	6715	6 + 5	* 2.249551	61.25	PK-U	31.5	0.00	-49.99	42.76	-	-	74	-31.24	360	101	V
			* 2.255137	49.59	ADR	31.5	0.00	-49.95	31.14	54	-22.86	-	-	360	101	V
			* 2.261604	61.37	PK-U	31.5	0.00	-50.06	42.81	-	-	74	-31.19	360	101	H
			* 2.266928	49.68	ADR	31.5	0.00	-50.16	31.02	54	-22.98	-	-	360	101	H
			* 4.000592	59.42	PK-U	33.5	0.00	-47.90	45.02	-	-	74	-28.98	360	101	H
			* 4.002102	58.85	PK-U	33.5	0.00	-47.62	44.73	-	-	74	-29.27	360	101	V
			* 4.005684	47.27	ADR	33.5	0.00	-47.90	32.87	54	-21.13	-	-	360	101	V
			* 4.010946	47.25	ADR	33.5	0.00	-48.00	32.75	54	-21.25	-	-	360	101	H
			* 11.088511	46.30	ADR	37.9	0.00	-44.35	39.85	54	-14.15	-	-	360	101	H
			* 11.093750	57.74	PK-U	37.9	0.00	-44.27	51.37	-	-	74	-22.63	360	101	V
			* 11.106705	46.62	ADR	37.9	0.00	-44.36	40.16	54	-13.84	-	-	360	101	V
			* 11.108729	58.21	PK-U	37.9	0.00	-44.35	51.76	-	-	74	-22.24	360	101	H
	6875 (Straddle)	6 + 5	* 2.242301	61.11	PK-U	31.5	0.00	-49.76	42.85	-	-	74	-31.15	0	101	H
			* 2.249027	61.18	PK-U	31.5	0.00	-50.09	42.59	-	-	74	-31.41	0	101	V
			* 2.249905	49.54	ADR	31.5	0.00	-49.92	31.12	54	-22.88	-	-	0	101	H
			* 2.255408	49.54	ADR	31.5	0.00	-50.06	30.98	54	-23.02	-	-	0	101	V
			* 4.001023	58.77	PK-U	33.5	0.00	-47.89	44.38	-	-	74	-29.62	0	101	H
			* 4.005969	47.34	ADR	33.5	0.00	-47.90	32.94	54	-21.06	-	-	0	101	H
			* 4.011986	58.89	PK-U	33.5	0.00	-48.00	44.39	-	-	74	-29.61	0	101	V
			* 4.014951	47.17	ADR	33.5	0.00	-48.00	32.67	54	-21.33	-	-	0	101	V
			* 11.092694	46.23	ADR	37.9	0.00	-44.41	39.72	54	-14.28	-	-	0	101	V
			* 11.095986	58.13	PK-U	37.9	0.00	-44.10	51.93	-	-	74	-22.07	0	101	H
			* 11.097998	46.22	ADR	37.9	0.00	-44.40	39.72	54	-14.28	-	-	0	101	H
			* 11.099565	58.10	PK-U	37.9	0.00	-44.23	51.77	-	-	74	-22.23	0	101	V
	EHT20 (26T RU0)	6+5	* 3.969092	57.89	PK-U	33.3	0.00	-47.52	43.67	-	-	74	-30.33	360	101	H
			* 3.973501	45.93	ADR	33.3	0.00	-47.64	31.59	54	-22.41	-	-	360	101	H
			* 3.967498	57.57	PK-U	33.3	0.00	-47.48	43.39	-	-	74	-30.61	360	101	V
			* 3.974471	45.95	ADR	33.3	0.00	-47.62	31.63	54	-22.37	-	-	360	101	V
			* 11.237107	55.56	PK-U	37.7	0.00	-44.96	48.30	-	-	74	-25.7	360	101	H
			* 11.263656	44.21	ADR	37.8	0.00	-44.89	37.12	54	-16.88	-	-	360	101	H
			* 15.704891	53.69	PK-U	41.2	0.00	-42.10	52.79	-	-	74	-21.21	360	101	H
			* 15.730269	42.15	ADR	41.2	0.00	-42.21	41.14	54	-12.86	-	-	360	101	H
			* 11.228020	56.05	PK-U	37.7	0.00	-45.02	48.73	-	-	74	-25.27	360	101	V
			* 11.255997	44.22	ADR	37.8	0.00	-44.77	37.25	54	-16.75	-	-	360	101	V
			* 15.722810	53.81	PK-U	41.2	0.00	-42.15	52.86	-	-	74	-21.14	360	101	V
EHT20 (26T RU4)	6715	6+5	* 15.736672	42.05	ADR	41.2	0.00	-42.25	41.00	54	-13	-	-	360	101	V
			* 3.976413	57.64	PK-U	33.3	0.00	-47.55	43.39	-	-	74	-30.61	360	101	H
			* 3.973187	45.86	ADR	33.3	0.00	-47.65	31.51	54	-22.49	-	-	360	101	H
			* 4.006375	57.30	PK-U	33.4	0.00	-47.45	43.25	-	-	74	-30.75	360	101	V
			* 3.975192	45.76	ADR	33.3	0.00	-47.60	31.46	54	-22.54	-	-	360	101	V
			* 11.455683	55.17	PK-U	38.1	0.00	-44.01	49.26	-	-	74	-24.74	360	101	H
			* 11.445225	43.49	ADR	38.1	0.00	-44.40	37.19	54	-16.81	-	-	360	101	H
			* 15.840807	54.24	PK-U	41.1	0.00	-42.32	53.02	-	-	74	-20.98	360	101	H
			* 15.843203	42.61	ADR	41.2	0.00	-42.36	41.45	54	-12.55	-	-	360	101	H
			* 11.477785	54.95	PK-U	38.1	0.00	-44.02	49.03	-	-	74	-24.97	360	101	V
			* 11.478305	43.62	ADR	38.1	0.00	-44.04	37.68	54	-16.32	-	-	360	101	V
			* 15.839671	54.41	PK-U	41.1	0.00	-42.35	53.16	-	-	74	-20.84	360	101	V
			* 15.834752	42.79	ADR	41.1	0.00	-42.29	41.60	54	-12.4	-	-	360	101	V
	EHT20 (26T RU8)	6+5	* 3.996348	57.37	PK-U	33.4	0.00	-47.15	43.62	-	-	74	-30.38	360	101	H
			* 3.977132	45.92	ADR	33.3	0.00	-47.52	31.70	54	-22.3	-	-	360	101	H
			* 3.988612	57.60	PK-U	33.4	0.00	-47.53	43.47	-	-	74	-30.53	360	101	V
			* 4.016071	45.71	ADR	33.5	0.00	-47.33	31.88	54	-22.12	-	-	360	101	V
			* 11.199688	55.78	PK-U	37.7	0.00	-44.56	48.92	-	-	74	-25.08	360	101	H
			* 11.213155	44.35	ADR	37.7	0.00	-44.80	37.25	54	-16.75	-	-	360	101	H
			* 15.603412	53.61	PK-U	41.2	0.00	-41.99	52.82	-	-	74	-21.18	360	101	H
			* 15.587893	41.89	ADR	41.1	0.00	-41.94	41.05	54	-12.95	-	-	360	101	H
			* 11.202864	56.16	PK-U	37.7	0.00	-44.64	49.22	-	-	74	-24.78	360	101	V
			* 11.209291	44.36	ADR	37.7	0.00	-44.74	37.32	54	-16.68	-	-	360	101	V
			* 15.608847	54.06	PK-U	41.2	0.00	-42.06	53.20	-	-	74	-20.8	360	101	V
			* 15.585241	42.09	ADR	41.1	0.00	-41.99	41.20	54	-12.8	-	-	360	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

STATE A 20MHz- Cont.

UNII-7 (MIMO CDD)	Channel Frequen cy MHz	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbt/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (106+26T RU82)	6535	6+5	* 1.502554	47.02	ADR	27.9	0.00	-47.40	27.52	54	-26.48	-	-	360	200	V
			* 1.507947	47.05	ADR	27.9	0.00	-47.40	27.55	54	-26.45	-	-	360	101	H
			* 1.509027	59.78	PK-U	27.8	0.00	-47.38	40.20	-	-	74	-33.8	360	101	H
			* 1.509348	59.58	PK-U	27.8	0.00	-47.37	40.01	-	-	74	-33.99	360	200	V
			3.045645	55.57	PK-U	33.0	0.00	-45.59	42.98	-	-	88.2	-45.22	360	101	V
			3.067289	56.22	PK-U	33.0	0.00	-45.56	43.66	-	-	88.2	-44.54	360	101	H
			3.071289	44.00	ADR	33.0	0.00	-45.55	31.45	68.2	-36.75	-	-	360	101	H
			3.083206	43.95	ADR	33.0	0.00	-45.52	31.43	68.2	-36.77	-	-	360	101	V
			* 11.870235	42.25	ADR	38.7	0.00	-42.35	38.60	54	-15.4	-	-	360	101	H
			* 11.872279	53.86	PK-U	38.7	0.00	-42.27	50.29	-	-	74	-23.71	360	101	H
			* 11.885921	54.13	PK-U	38.7	0.00	-41.89	50.94	-	-	74	-23.06	360	101	V
			* 11.894217	42.28	ADR	38.7	0.00	-41.75	39.23	54	-14.77	-	-	360	101	V
	6715		* 1.528690	57.69	PK-U	27.8	0.00	-47.31	38.18	-	-	74	-35.82	360	101	H
			* 1.528886	46.53	ADR	27.8	0.00	-47.31	27.02	54	-26.98	-	-	360	101	H
			* 1.529360	46.29	ADR	27.8	0.00	-47.31	26.78	54	-27.22	-	-	360	101	V
			* 1.533404	58.08	PK-U	27.8	0.00	-47.32	38.56	-	-	74	-35.44	360	101	V
			3.074606	56.34	PK-U	33.0	0.00	-45.52	43.82	-	-	88.2	-44.38	360	101	V
			3.075593	44.06	ADR	33.0	0.00	-45.50	31.56	68.2	-36.64	-	-	360	101	H
			3.078055	43.90	ADR	33.0	0.00	-45.48	31.42	68.2	-36.78	-	-	360	101	V
			3.080708	55.49	PK-U	33.0	0.00	-45.50	42.99	-	-	88.2	-45.21	360	101	H
			* 11.823218	42.19	ADR	38.6	0.00	-42.02	38.77	54	-15.23	-	-	360	199	H
			* 11.829701	42.39	ADR	38.6	0.00	-41.96	39.03	54	-14.97	-	-	360	101	V
			* 11.851879	53.72	PK-U	38.6	0.00	-42.27	50.05	-	-	74	-23.95	360	101	V
			* 11.859186	54.29	PK-U	38.6	0.00	-42.44	50.45	-	-	74	-23.55	360	199	H
EHT20 (106+26T RU83)	6875	* 2.277641	45.70	ADR	32.0	0.00	-46.72	30.98	54	-23.02	-	-	0	101	H	
		* 2.280489	57.70	PK-U	32.0	0.00	-46.73	42.97	-	-	74	-31.03	0	101	H	
		* 2.282591	45.62	ADR	32.0	0.00	-46.74	30.88	54	-23.12	-	-	0	101	V	
		* 2.313592	57.66	PK-U	31.9	0.00	-46.86	42.70	-	-	74	-31.3	0	101	V	
		13.139680	41.58	ADR	38.7	0.00	-41.58	38.70	68.2	-29.5	-	-	0	101	H	
		13.145159	41.71	ADR	38.7	0.00	-41.57	38.84	68.2	-29.36	-	-	0	101	V	
		13.149947	53.81	PK-U	38.8	0.00	-41.57	51.04	-	-	88.2	-37.16	0	101	H	
		13.152267	53.32	PK-U	38.8	0.00	-41.56	50.56	-	-	88.2	-37.64	0	101	V	
		3.374098	55.02	PK-U	32.7	0.00	-44.80	42.92	-	-	88.2	-45.28	0	101	H	
		3.389336	43.41	ADR	32.6	0.00	-44.82	31.19	68.2	-37.01	-	-	0	101	H	
		3.393027	43.09	ADR	32.6	0.00	-44.82	30.87	68.2	-37.33	-	-	0	200	V	
		3.400187	54.97	PK-U	32.6	0.00	-44.83	42.74	-	-	88.2	-45.46	0	200	V	
EHT20 (106T RU53)	6535	3.248453	58.21	PK-U	32.8	0.00	-47.45	43.56	-	-	88.2	-44.64	0	101	H	
		3.248111	46.45	ADR	32.8	0.00	-47.49	31.76	68.2	-36.44	-	-	0	101	H	
		3.245324	58.61	PK-U	32.8	0.00	-47.40	44.01	-	-	88.2	-44.19	0	200	V	
		3.247875	46.59	ADR	32.8	0.00	-47.49	31.90	68.2	-36.3	-	-	0	200	V	
		13.036564	54.17	PK-U	38.8	0.00	-42.64	50.33	-	-	88.2	-37.87	0	200	H	
		13.055359	42.83	ADR	38.8	0.00	-42.50	39.13	68.2	-29.07	-	-	0	200	H	
		17.647314	52.84	PK-U	41.5	0.00	-38.90	55.44	-	-	88.2	-32.76	0	200	H	
		17.649278	40.31	ADR	41.5	0.00	-38.90	42.91	68.2	-25.29	-	-	0	200	H	
		13.036649	54.80	PK-U	38.8	0.00	-42.64	50.96	-	-	88.2	-37.24	0	200	V	
		13.046240	42.79	ADR	38.8	0.00	-42.52	39.07	68.2	-29.13	-	-	0	200	V	
		17.663381	51.81	PK-U	41.4	0.00	-38.70	54.51	-	-	88.2	-33.69	0	101	V	
		17.646914	40.44	ADR	41.5	0.00	-38.90	43.04	68.2	-25.16	-	-	0	101	V	
	6715	1.292405	59.83	PK-U	29.4	0.00	-47.34	41.89	-	-	88.2	-46.31	360	101	H	
		1.298186	47.76	ADR	29.4	0.00	-47.37	29.79	68.2	-38.41	-	-	360	101	H	
		1.299039	47.74	ADR	29.4	0.00	-47.37	29.77	68.2	-38.43	-	-	360	101	V	
		* 1.306727	59.67	PK-U	29.4	0.00	-47.39	41.68	-	-	74	-32.32	360	101	V	
		* 2.802545	57.23	PK-U	32.1	0.00	-46.39	42.94	-	-	74	-31.06	360	101	V	
		* 2.802636	45.33	ADR	32.1	0.00	-46.39	31.04	54	-22.96	-	-	360	199	H	
		* 2.802716	56.87	PK-U	32.1	0.00	-46.39	42.58	-	-	74	-31.42	360	199	H	
		* 2.808474	45.25	ADR	32.1	0.00	-46.42	30.93	54	-23.07	-	-	360	101	V	
		* 11.493726	43.13	ADR	38.2	0.00	-42.55	38.78	54	-15.22	-	-	360	101	V	
		* 11.498973	55.04	PK-U	38.2	0.00	-42.63	50.61	-	-	74	-23.39	360	101	V	
		* 11.506216	54.88	PK-U	38.2	0.00	-42.75	50.33	-	-	74	-23.67	360	101	H	
		* 11.509312	43.02	ADR	38.2	0.00	-42.78	38.44	54	-15.56	-	-	360	101	H	
EHT20 (106T RU54)	6875	* 1.351791	59.27	PK-U	29.0	0.00	-47.28	40.99	-	-	74	-33.01	360	101	V	
		* 1.353211	58.96	PK-U	29.0	0.00	-47.28	40.68	-	-	74	-33.32	360	101	H	
		* 1.354764	47.45	ADR	29.0	0.00	-47.28	29.17	54	-24.83	-	-	360	101	V	
		* 1.355655	47.64	ADR	29.0	0.00	-47.29	29.35	54	-24.65	-	-	360	101	H	
		* 2.744212	45.26	ADR	32.4	0.00	-46.52	31.14	54	-22.86	-	-	360	199	H	
		* 2.747952	56.55	PK-U	32.4	0.00	-46.50	42.45	-	-	74	-31.55	360	200	V	
		* 2.748216	57.09	PK-U	32.4	0.00	-46.50	42.99	-	-	74	-31.01	360	199	H	
		* 2.748357	45.23	ADR	32.4	0.00	-46.50	31.13	54	-22.87	-	-	360	200	V	
		* 12.646516	53.21	PK-U	39.1	0.00	-41.36	50.95	-	-	74	-23.05	360	101	H	
		* 12.650539	53.59	PK-U	39.1	0.00	-41.30	51.39	-	-	74	-22.61	360	101	V	
		* 12.657859	41.82	ADR	39.2	0.00	-41.30	39.72	54	-14.28	-	-	360	101	V	
		* 12.660282	41.57	ADR	39.2	0.00	-41.35	39.42	54	-14.58	-	-	360	101	H	

STATE B 20MHz

UNII-7 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cb/ Filtr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (SU Mode)	6535	6+5	*2.22283	61.70	PK-U	31.5	0.00	-50.22	42.98	-	-	74	-31.02	360	200	V
			*2.250734	49.66	ADR	31.5	0.00	-50.05	31.11	54	-22.89	-	-	360	200	V
			*2.251817	61.73	PK-U	31.5	0.00	-50.10	43.13	-	-	74	-30.87	360	101	H
			*2.252417	49.64	ADR	31.5	0.00	-49.97	31.17	54	-22.83	-	-	360	101	H
			*4.714354	59.77	PK-U	34.1	0.00	-49.07	44.80	-	-	74	-29.2	360	101	V
			*4.720019	47.72	ADR	34.1	0.00	-49.00	32.82	54	-21.18	-	-	360	200	H
			*4.720691	48.06	ADR	34.1	0.00	-49.00	33.16	54	-20.84	-	-	360	101	V
			*4.725614	59.47	PK-U	34.1	0.00	-49.00	44.57	-	-	74	-29.43	360	200	H
			*15.933415	59.16	PK-U	40.7	0.00	-45.38	54.48	-	-	74	-19.52	360	200	H
			*15.939319	47.70	ADR	40.7	0.00	-45.40	43.00	54	-11	-	-	360	200	H
	*15.948082		59.19	PK-U	40.7	0.00	-45.42	54.47	-	-	74	-19.53	360	101	V	
	*15.948378		47.58	ADR	40.7	0.00	-45.48	42.80	54	-11.2	-	-	360	101	V	
	*2.233382		49.57	ADR	31.5	0.00	-49.85	31.22	54	-22.78	-	-	360	101	H	
	*2.24545		61.56	PK-U	31.5	0.00	-49.94	43.12	-	-	74	-30.88	360	101	V	
	*2.248818		49.78	ADR	31.5	0.00	-50.14	31.14	54	-22.86	-	-	360	101	V	
	*2.255398		62.08	PK-U	31.5	0.00	-50.06	43.52	-	-	74	-30.48	360	101	H	
	*3.777902		46.99	ADR	33.4	0.00	-47.93	32.46	54	-21.54	-	-	360	101	V	
	*3.781906		47.19	ADR	33.4	0.00	-48.27	32.32	54	-21.68	-	-	360	101	H	
	*3.78483		58.71	PK-U	33.4	0.00	-47.82	44.29	-	-	74	-29.71	360	101	H	
	*3.805077		58.79	PK-U	33.4	0.00	-47.73	44.46	-	-	74	-29.54	360	101	V	
	*11.963562		57.76	PK-U	38.8	0.00	-45.34	51.22	-	-	74	-22.78	360	101	V	
	*11.972553		57.68	PK-U	38.8	0.00	-45.20	51.28	-	-	74	-22.72	360	101	H	
	*11.978212		46.16	ADR	38.8	0.00	-45.64	39.32	54	-14.68	-	-	360	101	V	
	*11.979264		46.02	ADR	38.8	0.00	-45.43	39.39	54	-14.61	-	-	360	101	H	
	*2.22569		61.64	PK-U	31.5	0.00	-50.00	43.14	-	-	74	-30.86	360	101	V	
	*2.245853		49.53	ADR	31.5	0.00	-49.99	31.04	54	-22.96	-	-	360	101	H	
	*2.255784		49.94	ADR	31.5	0.00	-50.21	31.23	54	-22.77	-	-	360	101	V	
	*2.256967		61.27	PK-U	31.5	0.00	-50.11	42.66	-	-	74	-31.34	360	101	H	
	*4.170232		58.45	PK-U	33.5	0.00	-48.18	43.77	-	-	74	-30.23	360	101	H	
	*4.173163		46.95	ADR	33.5	0.00	-47.72	32.73	54	-21.27	-	-	360	101	V	
	*4.173399		58.46	PK-U	33.5	0.00	-47.74	44.22	-	-	74	-29.78	360	101	V	
*4.177725	47.00	ADR	33.4	0.00	-47.90	32.50	54	-21.5	-	-	360	101	H			
*11.079615	46.55	ADR	37.9	0.00	-44.34	40.11	54	-13.89	-	-	360	101	V			
*11.08483	58.66	PK-U	37.9	0.00	-44.53	52.03	-	-	74	-21.97	360	101	H			
*11.08735	58.10	PK-U	37.9	0.00	-44.50	51.50	-	-	74	-22.5	360	101	V			
*11.08933	46.60	ADR	37.9	0.00	-44.30	40.20	54	-13.8	-	-	360	101	H			
EHT20 (26T RU0)	6535	6+5	*1.134135	60.12	PK-U	27.8	0.00	-47.79	40.13	-	-	74	-33.87	0	101	V
			*1.135315	59.16	PK-U	27.8	0.00	-47.81	39.15	-	-	74	-34.85	0	101	H
			*1.138550	48.07	ADR	27.9	0.00	-47.84	28.13	54	-25.87	-	-	0	101	H
			*1.140312	47.89	ADR	27.9	0.00	-47.86	27.93	54	-26.07	-	-	0	101	V
			*11.832177	54.12	PK-U	38.6	0.00	-41.94	50.78	-	-	74	-23.22	0	101	H
			*11.832649	42.24	ADR	38.6	0.00	-41.95	38.89	54	-15.11	-	-	0	101	H
			*11.850515	54.18	PK-U	38.6	0.00	-42.24	50.54	-	-	74	-23.46	0	101	V
			*11.853559	42.26	ADR	38.6	0.00	-42.32	38.54	54	-15.46	-	-	0	101	V
			*3.852884	43.76	ADR	33.5	0.00	-44.95	32.31	54	-21.69	-	-	0	101	H
			*3.854683	43.69	ADR	33.5	0.00	-44.97	32.22	54	-21.78	-	-	0	101	V
*3.856230	55.55	PK-U	33.5	0.00	-45.00	44.05	-	-	74	-29.95	0	101	H			
*3.860362	54.96	PK-U	33.5	0.00	-44.95	43.51	-	-	74	-30.49	0	101	V			
EHT20 (26T RU4)	6715	6+5	*1.134462	47.87	ADR	27.8	0.00	-47.80	27.87	54	-26.13	-	-	0	101	V
			*1.137101	47.83	ADR	27.9	0.00	-47.83	27.90	54	-26.1	-	-	0	101	H
			*1.137350	59.30	PK-U	27.9	0.00	-47.83	39.37	-	-	74	-34.63	0	101	H
			*1.140248	59.13	PK-U	27.9	0.00	-47.86	39.17	-	-	74	-34.83	0	101	V
			*11.835137	54.25	PK-U	38.6	0.00	-41.94	50.91	-	-	74	-23.09	0	101	H
			*11.862266	42.38	ADR	38.7	0.00	-42.41	38.67	54	-15.33	-	-	0	101	H
			*11.901956	53.97	PK-U	38.7	0.00	-41.86	50.81	-	-	74	-23.19	0	101	V
			*11.906456	42.32	ADR	38.7	0.00	-41.90	39.12	54	-14.88	-	-	0	101	V
			*3.842505	43.91	ADR	33.4	0.00	-45.13	32.18	54	-21.82	-	-	0	101	V
			*3.849122	55.43	PK-U	33.4	0.00	-44.95	43.88	-	-	74	-30.12	0	101	V
*3.855225	43.90	ADR	33.5	0.00	-44.98	32.42	54	-21.58	-	-	0	101	H			
*3.872787	55.47	PK-U	33.5	0.00	-44.97	44.00	-	-	74	-30	0	101	H			
EHT20 (26T RU8)	6875	6+5	*1.133559	59.53	PK-U	27.8	0.00	-47.79	39.54	-	-	74	-34.46	0	101	V
			*1.136097	47.91	ADR	27.9	0.00	-47.82	27.99	54	-26.01	-	-	0	101	V
			*1.138565	59.80	PK-U	27.9	0.00	-47.84	39.86	-	-	74	-34.14	0	101	H
			*1.140965	47.99	ADR	27.9	0.00	-47.85	28.04	54	-25.96	-	-	0	101	H
			*11.842948	54.08	PK-U	38.6	0.00	-42.06	50.62	-	-	74	-23.38	0	101	V
			*11.848104	54.13	PK-U	38.6	0.00	-42.17	50.56	-	-	74	-23.44	0	101	H
			*11.853251	42.30	ADR	38.6	0.00	-42.33	38.57	54	-15.43	-	-	0	101	V
			*11.857591	42.60	ADR	38.6	0.00	-42.41	38.79	54	-15.21	-	-	0	101	H
			*3.835586	55.41	PK-U	33.4	0.00	-45.04	43.77	-	-	74	-30.23	0	101	V
			*3.840101	43.86	ADR	33.4	0.00	-45.09	32.17	54	-21.83	-	-	0	101	V
*3.845362	43.83	ADR	33.4	0.00	-45.09	32.14	54	-21.86	-	-	0	101	H			
*3.849233	55.64	PK-U	33.4	0.00	-44.94	44.10	-	-	74	-29.9	0	101	H			

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

STATE B 20MHz- Cont.

UNII-7 (MIMO CDD)	Channel Frequency MHz	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbt/F ltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity			
EHT20 (106+26T RU82)	6535	6+5	1.911130	58.49	PK-U	31.4	0.00	-47.21	42.68	-	-	88.2	-45.52	360	101	H			
			1.912028	46.97	ADR	31.4	0.00	-47.21	31.16	68.2	-37.04	-	-	360	101	V			
			1.913352	46.77	ADR	31.4	0.00	-47.22	30.95	68.2	-37.25	-	-	360	101	H			
			1.915170	58.24	PK-U	31.4	0.00	-47.21	42.43	-	-	88.2	-45.77	360	101	V			
			*3.89889	43.45	ADR	33.5	0.00	-44.92	32.03	54	-21.97	-	-	360	200	H			
			*3.901641	55.30	PK-U	33.5	0.00	-44.97	43.83	-	-	74	-30.17	360	200	H			
			*3.907127	43.54	ADR	33.5	0.00	-44.90	32.14	54	-21.86	-	-	360	200	V			
			*3.911198	54.92	PK-U	33.5	0.00	-44.87	43.55	-	-	74	-30.45	360	200	V			
			*11.463864	43.10	ADR	38.1	0.00	-42.85	38.35	54	-15.65	-	-	360	101	H			
			*11.476294	54.60	PK-U	38.1	0.00	-42.55	50.15	-	-	74	-23.85	360	101	H			
			*11.476614	54.56	PK-U	38.1	0.00	-42.55	50.11	-	-	74	-23.89	360	199	V			
			*11.4973	42.83	ADR	38.2	0.00	-42.62	38.41	54	-15.59	-	-	360	199	V			
	6715		1.856155	59.88	PK-U	31.1	0.00	-47.41	43.57	-	-	88.2	-44.63	360	101	H			
			1.858458	47.39	ADR	31.1	0.00	-47.39	31.10	68.2	-37.1	-	-	360	200	V			
			1.859853	47.35	ADR	31.1	0.00	-47.39	31.06	68.2	-37.14	-	-	360	101	H			
			1.861974	58.80	PK-U	31.1	0.00	-47.39	42.51	-	-	88.2	-45.69	360	200	V			
			3.377512	43.47	ADR	32.9	0.00	-45.00	31.37	68.2	-36.83	-	-	360	101	V			
			3.408897	43.44	ADR	32.8	0.00	-44.93	31.31	68.2	-36.89	-	-	360	101	H			
			3.409193	54.89	PK-U	32.8	0.00	-44.92	42.77	-	-	88.2	-45.43	360	101	V			
			3.410568	54.88	PK-U	32.8	0.00	-44.89	42.79	-	-	88.2	-45.41	360	101	H			
			*12.563088	41.43	ADR	39.1	0.00	-41.55	38.98	54	-15.02	-	-	360	199	V			
			*12.566184	41.53	ADR	39.1	0.00	-41.55	39.08	54	-14.92	-	-	360	101	H			
			*12.577443	52.99	PK-U	39.1	0.00	-41.29	50.80	-	-	74	-23.2	360	199	V			
			*12.580966	53.56	PK-U	39.1	0.00	-41.20	51.46	-	-	74	-22.54	360	101	H			
EHT20 (106+26T RU83)	6875	6+5	1.635680	57.94	PK-U	28.3	0.00	-47.64	38.60	-	-	88.2	-49.6	360	200	V			
			1.639807	58.34	PK-U	28.3	0.00	-47.64	39.00	-	-	88.2	-49.2	360	200	H			
			1.642720	46.47	ADR	28.4	0.00	-47.64	27.23	68.2	-40.97	-	-	360	200	V			
			1.647117	46.87	ADR	28.4	0.00	-47.63	27.64	68.2	-40.56	-	-	360	200	H			
			2.977688	44.64	ADR	32.7	0.00	-45.79	31.55	68.2	-36.65	-	-	360	200	H			
			2.979066	56.03	PK-U	32.7	0.00	-45.80	42.93	-	-	88.2	-45.27	360	101	V			
			2.980018	44.48	ADR	32.7	0.00	-45.80	31.38	68.2	-36.82	-	-	360	101	V			
			2.980954	56.03	PK-U	32.7	0.00	-45.80	42.93	-	-	88.2	-45.27	360	200	H			
			*11.565055	42.74	ADR	38.2	0.00	-42.68	38.26	54	-15.74	-	-	360	101	V			
			*11.576153	54.01	PK-U	38.2	0.00	-42.66	49.55	-	-	74	-24.45	360	101	V			
			EHT20 (106T RU53)	6535	6+5	1.800198	59.50	PK-U	30.7	0.00	-47.64	42.56	-	-	88.2	-45.64	360	101	H
						1.804423	47.73	ADR	30.7	0.00	-47.60	30.83	68.2	-37.37	-	-	360	101	V
1.808844	59.56	PK-U				30.8	0.00	-47.59	42.77	-	-	88.2	-45.43	360	101	V			
1.809126	47.81	ADR				30.8	0.00	-47.59	31.02	68.2	-37.18	-	-	360	101	H			
*4.136568	55.78	PK-U				33.7	0.00	-45.39	44.09	-	-	74	-29.91	360	200	V			
*4.136981	44.40	ADR				33.7	0.00	-45.38	32.72	54	-21.28	-	-	360	200	V			
*4.167344	44.21	ADR				33.7	0.00	-45.24	32.67	54	-21.33	-	-	360	101	H			
*4.172717	55.94	PK-U				33.8	0.00	-45.05	44.69	-	-	74	-29.31	360	101	H			
*12.026016	42.33	ADR				38.9	0.00	-42.10	39.13	54	-14.87	-	-	360	101	H			
*12.028951	42.49	ADR				38.9	0.00	-42.14	39.25	54	-14.75	-	-	360	101	V			
*12.036275	54.53	PK-U				38.9	0.00	-42.17	51.26	-	-	74	-22.74	360	101	V			
*12.049325	54.14	PK-U				38.9	0.00	-41.83	51.21	-	-	74	-22.79	360	101	H			
6715	1.851225	59.28		PK-U		31.1	0.00	-47.40	42.98	-	-	88.2	-45.22	360	199	V			
	1.854194	58.94		PK-U		31.1	0.00	-47.40	42.64	-	-	88.2	-45.56	360	199	H			
	1.857913	47.42		ADR		31.1	0.00	-47.40	31.12	68.2	-37.08	-	-	360	199	H			
	1.859713	47.28		ADR		31.1	0.00	-47.39	30.99	68.2	-37.21	-	-	360	199	V			
	*4.165661	44.35		ADR		33.7	0.00	-45.31	32.74	54	-21.26	-	-	360	101	H			
	*4.166488	55.95		PK-U		33.7	0.00	-45.28	44.37	-	-	74	-29.63	360	199	V			
	*4.178269	44.20		ADR		33.8	0.00	-45.13	32.87	54	-21.13	-	-	360	199	V			
	*4.178362	55.59		PK-U		33.8	0.00	-45.13	44.26	-	-	74	-29.74	360	101	H			
	*11.709863	54.39		PK-U		38.4	0.00	-42.77	50.02	-	-	74	-23.98	360	199	H			
	*11.715938	54.27		PK-U		38.5	0.00	-42.73	50.04	-	-	74	-23.96	360	101	V			
	*11.727317	42.75		ADR		38.5	0.00	-42.70	38.55	54	-15.45	-	-	360	101	V			
	*11.735956	42.61		ADR		38.5	0.00	-42.62	38.49	54	-15.51	-	-	360	199	H			
EHT20 (106T RU54)	6875	6+5	1.650212	58.25	PK-U	28.5	0.00	-47.62	39.13	-	-	88.2	-49.07	360	199	H			
			1.650359	46.47	ADR	28.5	0.00	-47.62	27.35	68.2	-40.85	-	-	360	199	H			
			1.653368	58.00	PK-U	28.5	0.00	-47.63	38.87	-	-	88.2	-49.33	360	200	V			
			1.690377	46.69	ADR	29.0	0.00	-47.70	27.99	54	-26.01	-	-	360	200	V			
			3.311925	43.55	ADR	32.9	0.00	-44.91	31.54	68.2	-36.66	-	-	360	101	V			
			3.315767	43.36	ADR	32.9	0.00	-44.99	31.27	68.2	-36.93	-	-	360	199	H			
			3.318003	55.09	PK-U	32.9	0.00	-44.99	43.00	-	-	88.2	-45.2	360	199	H			
			3.320711	55.51	PK-U	32.9	0.00	-44.96	43.45	-	-	88.2	-44.75	360	101	V			
			*11.058668	42.98	ADR	37.8	0.00	-42.69	38.09	54	-15.91	-	-	360	200	H			
			*11.085649	43.07	ADR	37.8	0.00	-42.84	38.03	54	-15.97	-	-	360	101	V			
			*11.086029	54.88	PK-U	37.8	0.00	-42.84	49.84	-	-	74	-24.16	360	200	H			
			*11.091757	54.43	PK-U	37.8	0.00	-42.77	49.46	-	-	74	-24.54	360	101	V			

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

STATE A 40MHz

UNII-7 (MIMO CDD)	Channel Frequency MHz	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbt/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT40 (SU Mode)	6525	6+5	* 2.253814	49.47	ADR	31.5	0.00	-50.21	30.76	54	-23.24	-	-	360	101	V
			* 2.254694	49.43	ADR	31.5	0.00	-50.02	30.91	54	-23.09	-	-	360	199	H
			* 2.257667	61.20	PK-U	31.5	0.00	-50.03	42.67	-	-	74	-31.33	360	101	V
			* 2.260138	61.65	PK-U	31.5	0.00	-50.00	43.15	-	-	74	-30.85	360	199	H
			* 4.721804	47.72	ADR	34.1	0.00	-49.08	32.74	54	-21.26	-	-	360	198	V
			* 4.722710	47.85	ADR	34.1	0.00	-49.10	32.85	54	-21.15	-	-	360	101	H
			* 4.740909	59.45	PK-U	34.2	0.00	-48.94	44.71	-	-	74	-29.29	360	198	V
			* 4.757839	59.52	PK-U	34.2	0.00	-49.00	44.72	-	-	74	-29.28	360	101	H
			* 15.751865	59.26	PK-U	40.6	0.00	-45.79	54.07	-	-	74	-19.93	360	101	V
			* 15.762789	59.64	PK-U	40.6	0.00	-45.72	54.52	-	-	74	-19.48	360	200	H
			* 15.766272	47.30	ADR	40.6	0.00	-45.15	42.75	54	-11.25	-	-	360	200	H
			* 15.773431	47.23	ADR	40.6	0.00	-45.46	42.37	54	-11.63	-	-	360	101	V
	6565		* 2.231581	61.08	PK-U	31.5	0.00	-50.10	42.48	-	-	74	-31.52	360	101	H
			* 2.240797	49.61	ADR	31.5	0.00	-49.70	31.41	54	-22.59	-	-	360	101	V
			* 2.249632	49.89	ADR	31.5	0.00	-49.97	31.42	54	-22.58	-	-	360	101	H
			* 2.250307	61.54	PK-U	31.5	0.00	-49.96	43.08	-	-	74	-30.92	360	101	V
			* 3.994903	47.23	ADR	33.5	0.00	-48.45	32.28	54	-21.72	-	-	360	101	V
			* 3.996711	58.44	PK-U	33.5	0.00	-48.21	43.73	-	-	74	-30.27	360	101	V
			* 4.003125	47.30	ADR	33.5	0.00	-47.79	33.01	54	-20.99	-	-	360	101	H
			* 4.004694	58.76	PK-U	33.5	0.00	-47.84	44.42	-	-	74	-29.58	360	101	H
			* 11.039321	46.95	ADR	37.8	0.00	-45.36	39.39	54	-14.61	-	-	360	101	V
			* 11.042301	46.92	ADR	37.8	0.00	-45.37	39.35	54	-14.65	-	-	360	101	H
			* 11.061955	58.65	PK-U	37.9	0.00	-44.90	51.65	-	-	74	-22.35	360	101	H
			* 11.069402	58.98	PK-U	37.9	0.00	-44.80	52.08	-	-	74	-21.92	360	101	V
	6685		* 2.234754	61.46	PK-U	31.5	0.00	-49.87	43.09	-	-	74	-30.91	360	101	H
			* 2.247423	49.55	ADR	31.5	0.00	-50.30	30.75	54	-23.25	-	-	360	101	H
			* 2.248043	49.69	ADR	31.5	0.00	-50.29	30.90	54	-23.1	-	-	360	101	V
			* 2.250829	61.72	PK-U	31.5	0.00	-50.07	43.15	-	-	74	-30.85	360	101	V
			* 4.010399	58.98	PK-U	33.5	0.00	-48.00	44.48	-	-	74	-29.52	360	101	H
			* 4.010479	47.17	ADR	33.5	0.00	-48.00	32.67	54	-21.33	-	-	360	101	H
			* 4.012066	58.34	PK-U	33.5	0.00	-47.99	43.85	-	-	74	-30.15	360	101	V
			* 4.012257	46.92	ADR	33.5	0.00	-47.95	32.47	54	-21.53	-	-	360	101	V
			* 11.074175	46.50	ADR	37.9	0.00	-45.01	39.39	54	-14.61	-	-	360	101	H
			* 11.078695	58.30	PK-U	37.9	0.00	-44.46	51.74	-	-	74	-22.26	360	101	V
			* 11.082838	58.14	PK-U	37.9	0.00	-44.37	51.67	-	-	74	-22.33	360	101	H
			* 11.085738	46.51	ADR	37.9	0.00	-44.45	39.96	54	-14.04	-	-	360	101	V
	6845		* 2.247730	49.58	ADR	31.5	0.00	-50.30	30.78	54	-23.22	-	-	360	101	H
			* 2.252746	61.81	PK-U	31.5	0.00	-49.88	43.43	-	-	74	-30.57	360	101	V
			* 2.256856	49.75	ADR	31.5	0.00	-50.13	31.12	54	-22.88	-	-	360	101	V
			* 2.274882	61.21	PK-U	31.6	0.00	-50.35	42.46	-	-	74	-31.54	360	101	H
			* 3.991011	59.10	PK-U	33.4	0.00	-47.81	44.69	-	-	74	-29.31	360	101	V
			* 3.999848	47.26	ADR	33.5	0.00	-47.87	32.89	54	-21.11	-	-	360	101	H
			* 4.008107	47.26	ADR	33.5	0.00	-48.09	32.67	54	-21.33	-	-	360	101	V
			* 4.009918	58.72	PK-U	33.5	0.00	-48.00	44.22	-	-	74	-29.78	360	101	H
			* 11.075739	58.11	PK-U	37.9	0.00	-44.60	51.41	-	-	74	-22.59	360	101	V
			* 11.075899	46.61	ADR	37.9	0.00	-44.60	39.91	54	-14.09	-	-	360	101	H
			* 11.079919	46.58	ADR	37.9	0.00	-44.31	40.17	54	-13.83	-	-	360	101	V
			* 11.092325	58.24	PK-U	37.9	0.00	-44.30	51.84	-	-	74	-22.16	360	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

STATE B 40MHz

UNII-7 (MIMO CDD)	Channel Frequency MHz	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbt/ Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT40 (SU Mode)	6525	6+5	*2.241463	49.67	ADR	31.5	0.00	-49.65	31.52	54	-22.48	-	-	360	101	V
			*2.248191	61.99	PK-U	31.5	0.00	-50.26	43.23	-	-	74	-30.77	360	101	V
			*2.250538	61.32	PK-U	31.5	0.00	-50.01	42.81	-	-	74	-31.19	360	200	H
			*2.254906	49.58	ADR	31.5	0.00	-49.94	31.14	54	-22.86	-	-	360	200	H
			*4.868564	59.37	PK-U	34.2	0.00	-48.60	44.97	-	-	74	-29.03	360	101	V
			*4.871802	59.32	PK-U	34.2	0.00	-48.76	44.76	-	-	74	-29.24	360	200	H
			*4.874273	47.58	ADR	34.2	0.00	-48.53	33.25	54	-20.75	-	-	360	200	H
			*4.87643	47.53	ADR	34.2	0.00	-48.66	33.07	54	-20.93	-	-	360	101	V
			*15.692516	47.27	ADR	40.5	0.00	-45.65	42.12	54	-11.88	-	-	360	101	H
			*15.712163	60.00	PK-U	40.5	0.00	-45.78	54.72	-	-	74	-19.28	360	199	V
			*15.721349	59.72	PK-U	40.5	0.00	-45.63	54.59	-	-	74	-19.41	360	101	H
			*15.732149	47.16	ADR	40.6	0.00	-45.59	42.17	54	-11.83	-	-	360	199	V
	6565		*2.242258	62.03	PK-U	31.5	0.00	-49.75	43.78	-	-	74	-30.22	360	101	H
			*2.245558	61.93	PK-U	31.5	0.00	-49.96	43.47	-	-	74	-30.53	360	101	V
			*2.25022	49.55	ADR	31.5	0.00	-49.94	31.11	54	-22.89	-	-	360	101	V
			*2.255701	49.57	ADR	31.5	0.00	-50.18	30.89	54	-23.11	-	-	360	101	H
			*3.994473	59.55	PK-U	33.5	0.00	-48.24	44.81	-	-	74	-29.19	360	101	H
			*3.998053	58.86	PK-U	33.5	0.00	-48.17	44.19	-	-	74	-29.81	360	101	V
			*3.999762	47.27	ADR	33.5	0.00	-47.85	32.92	54	-21.08	-	-	360	101	H
			*4.00871	47.19	ADR	33.5	0.00	-48.03	32.66	54	-21.34	-	-	360	101	V
			*11.033521	58.61	PK-U	37.8	0.00	-45.61	50.80	-	-	74	-23.2	360	101	V
			*11.046308	47.00	ADR	37.8	0.00	-45.30	39.50	54	-14.5	-	-	360	101	V
			*11.04746	46.71	ADR	37.8	0.00	-45.21	39.30	54	-14.7	-	-	360	101	H
			*11.050448	58.48	PK-U	37.8	0.00	-45.36	50.92	-	-	74	-23.08	360	101	H
	6685		*2.246596	49.57	ADR	31.5	0.00	-50.18	30.89	54	-23.11	-	-	360	101	H
			*2.252645	49.70	ADR	31.5	0.00	-49.91	31.29	54	-22.71	-	-	360	101	V
			*2.256155	61.37	PK-U	31.5	0.00	-50.27	42.60	-	-	74	-31.4	360	101	V
			*2.26403	61.17	PK-U	31.5	0.00	-50.39	42.28	-	-	74	-31.72	360	101	H
			*4.001495	58.96	PK-U	33.5	0.00	-47.75	44.71	-	-	74	-29.29	360	101	H
			*4.003912	47.08	ADR	33.5	0.00	-47.71	32.87	54	-21.13	-	-	360	101	H
			*4.005491	47.18	ADR	33.5	0.00	-47.90	32.78	54	-21.22	-	-	360	101	V
			*4.013192	58.70	PK-U	33.5	0.00	-47.84	44.36	-	-	74	-29.64	360	101	V
			*11.070015	46.70	ADR	37.9	0.00	-44.80	39.80	54	-14.2	-	-	360	101	V
			*11.072623	58.57	PK-U	37.9	0.00	-44.91	51.56	-	-	74	-22.44	360	101	V
			*11.080211	57.89	PK-U	37.9	0.00	-44.32	51.47	-	-	74	-22.53	360	101	H
			*11.086266	46.50	ADR	37.9	0.00	-44.45	39.95	54	-14.05	-	-	360	101	H
	6845		*2.225216	61.57	PK-U	31.5	0.00	-50.00	43.07	-	-	74	-30.93	360	101	V
			*2.231844	61.10	PK-U	31.5	0.00	-50.10	42.50	-	-	74	-31.5	360	101	H
			*2.242163	49.56	ADR	31.5	0.00	-49.73	31.33	54	-22.67	-	-	360	101	H
			*2.246347	49.77	ADR	31.5	0.00	-50.10	31.17	54	-22.83	-	-	360	101	V
			*3.989809	58.73	PK-U	33.4	0.00	-47.94	44.19	-	-	74	-29.81	360	101	V
			*4.003353	47.31	ADR	33.5	0.00	-47.76	33.05	54	-20.95	-	-	360	101	H
			*4.004624	58.97	PK-U	33.5	0.00	-47.82	44.65	-	-	74	-29.35	360	101	H
			*4.007398	47.20	ADR	33.5	0.00	-47.86	32.84	54	-21.16	-	-	360	101	V
			*11.088591	46.31	ADR	37.9	0.00	-44.36	39.85	54	-14.15	-	-	360	101	H
			*11.09043	58.36	PK-U	37.9	0.00	-44.19	52.07	-	-	74	-21.93	360	101	V
			*11.091078	46.34	ADR	37.9	0.00	-44.29	39.95	54	-14.05	-	-	360	101	V
			*11.109668	58.14	PK-U	37.9	0.00	-44.40	51.64	-	-	74	-22.36	360	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

STATE A 80MHz

UNII-7 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cb/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity	
EHT80 (SU Mode)	6545	6+5	* 2.244728	61.58	PK-U	31.5	0.00	-49.87	43.21	-	-	74	-30.79	0	101	H	
			* 2.247735	49.70	ADR	31.5	0.00	-50.30	30.90	54	-23.1	-	-	0	101	V	
			* 2.251527	49.84	ADR	31.5	0.00	-50.10	31.24	54	-22.76	-	-	0	101	H	
			* 2.252943	61.58	PK-U	31.5	0.00	-49.82	43.26	-	-	74	-30.74	0	101	V	
			* 4.006733	58.69	PK-U	33.5	0.00	-47.75	44.44	-	-	74	-29.56	0	101	H	
			* 4.008969	47.15	ADR	33.5	0.00	-48.00	32.65	54	-21.35	-	-	0	101	V	
			* 4.010106	58.94	PK-U	33.5	0.00	-48.00	44.44	-	-	74	-29.56	0	101	V	
			* 4.010448	47.28	ADR	33.5	0.00	-48.00	32.78	54	-21.22	-	-	0	101	H	
			* 11.039621	46.89	ADR	37.8	0.00	-45.42	39.27	54	-14.73	-	-	0	101	H	
			* 11.040669	47.03	ADR	37.8	0.00	-45.37	39.46	54	-14.54	-	-	0	101	V	
			* 11.047192	58.65	PK-U	37.8	0.00	-45.26	51.19	-	-	74	-22.81	0	101	H	
			* 11.070062	58.95	PK-U	37.9	0.00	-44.79	52.06	-	-	74	-21.94	0	101	V	
			* 2.244253	49.86	ADR	31.5	0.00	-49.83	31.53	54	-22.47	-	-	0	101	H	
			* 2.251061	62.57	PK-U	31.5	0.00	-50.10	43.97	-	-	74	-30.03	0	101	H	
			* 2.253069	61.54	PK-U	31.5	0.00	-49.83	43.21	-	-	74	-30.79	0	101	V	
			* 2.258073	49.83	ADR	31.5	0.00	-50.01	31.32	54	-22.68	-	-	0	101	V	
			* 3.711193	58.97	PK-U	33.3	0.00	-47.80	44.47	-	-	74	-29.53	0	101	H	
			* 3.711491	47.02	ADR	33.3	0.00	-47.80	32.52	54	-21.48	-	-	0	101	V	
	* 3.711731		46.66	ADR	33.3	0.00	-47.80	32.16	54	-21.84	-	-	0	101	H		
	* 3.724001		58.55	PK-U	33.3	0.00	-47.90	43.95	-	-	74	-30.05	0	101	V		
	* 11.070511		46.55	ADR	37.9	0.00	-44.70	39.75	54	-14.25	-	-	0	101	V		
	* 11.072395		58.20	PK-U	37.9	0.00	-44.98	51.12	-	-	74	-22.88	0	101	V		
	* 11.077315		58.10	PK-U	37.9	0.00	-44.39	51.61	-	-	74	-22.39	0	101	H		
	* 11.079699		46.66	ADR	37.9	0.00	-44.33	40.23	54	-13.77	-	-	0	101	H		
	* 2.200453		49.63	ADR	31.4	0.00	-50.01	31.02	54	-22.98	-	-	0	199	H		
	* 2.201844		60.93	PK-U	31.4	0.00	-49.90	42.43	-	-	74	-31.57	0	199	H		
	* 2.228574		61.63	PK-U	31.5	0.00	-50.19	42.94	-	-	74	-31.06	0	101	V		
	* 2.232751		49.40	ADR	31.5	0.00	-49.80	31.10	54	-22.9	-	-	0	101	V		
	* 4.641678		59.25	PK-U	34.2	0.00	-48.80	44.65	-	-	74	-29.35	0	101	V		
	* 4.652837		47.55	ADR	34.2	0.00	-48.88	32.87	54	-21.13	-	-	0	101	H		
	* 4.653517		47.54	ADR	34.2	0.00	-48.80	32.94	54	-21.06	-	-	0	101	V		
	* 4.654046		59.45	PK-U	34.2	0.00	-48.71	44.94	-	-	74	-29.06	0	101	H		
	* 15.930892		59.37	PK-U	40.7	0.00	-45.62	54.45	-	-	74	-19.55	0	200	H		
	* 15.941267		47.41	ADR	40.7	0.00	-45.23	42.88	54	-11.12	-	-	0	200	H		
	* 15.948775		47.55	ADR	40.7	0.00	-45.55	42.70	54	-11.3	-	-	0	101	V		
	* 15.964249		59.33	PK-U	40.7	0.00	-45.50	54.53	-	-	74	-19.47	0	101	V		
	EHT80 (484+242T RU90)		6865	* 1.400762	58.88	PK-U	28.7	0.00	-47.40	40.18	-	-	74	-33.82	0	200	V
				* 1.405525	59.22	PK-U	28.6	0.00	-47.42	40.40	-	-	74	-33.6	0	101	H
				* 1.406112	47.42	ADR	28.6	0.00	-47.42	28.60	54	-25.4	-	-	0	101	H
				* 1.409707	47.58	ADR	28.6	0.00	-47.41	28.77	54	-25.23	-	-	0	200	V
				* 2.771519	56.66	PK-U	32.3	0.00	-46.41	42.55	-	-	74	-31.45	0	200	H
				* 2.794983	45.32	ADR	32.2	0.00	-46.41	31.11	54	-22.89	-	-	0	200	H
				* 2.800737	56.75	PK-U	32.2	0.00	-46.41	42.54	-	-	74	-31.46	0	200	V
				* 2.803559	45.13	ADR	32.1	0.00	-46.39	30.84	54	-23.16	-	-	0	200	V
				* 11.128521	55.05	PK-U	37.8	0.00	-43.19	49.66	-	-	74	-24.34	0	101	V
				* 11.143839	54.88	PK-U	37.8	0.00	-43.27	49.41	-	-	74	-24.59	0	101	H
				* 11.155906	43.11	ADR	37.8	0.00	-43.32	37.59	54	-16.41	-	-	0	101	V
				* 11.165309	43.17	ADR	37.8	0.00	-43.29	37.68	54	-16.32	-	-	0	101	H
EHT80 (484+242T RU92)	6705	* 1.415373	58.64	PK-U	28.6	0.00	-47.42	39.82	-	-	74	-34.18	2	101	H		
		* 1.417266	47.03	ADR	28.5	0.00	-47.42	28.11	54	-25.89	-	-	2	101	H		
		* 1.457178	59.19	PK-U	28.2	0.00	-47.44	39.95	-	-	74	-34.05	2	101	V		
		* 1.457520	47.26	ADR	28.1	0.00	-47.43	27.93	54	-26.07	-	-	2	101	V		
		* 2.887057	56.67	PK-U	32.2	0.00	-46.09	42.78	-	-	74	-31.22	2	101	H		
		* 2.910221	45.04	ADR	32.4	0.00	-46.06	31.38	68.2	-36.82	-	-	2	101	V		
		* 2.913828	45.01	ADR	32.4	0.00	-46.01	31.40	68.2	-36.8	-	-	2	101	H		
		* 2.919962	56.55	PK-U	32.4	0.00	-45.98	42.97	-	-	88.2	-45.23	2	101	V		
		* 11.748609	55.18	PK-U	38.5	0.00	-42.51	51.17	-	-	74	-22.83	2	101	V		
		* 11.750613	43.03	ADR	38.5	0.00	-42.49	39.04	54	-14.96	-	-	2	101	V		
EHT80 (484+242T RU93)	6545	* 11.755044	42.80	ADR	38.5	0.00	-42.41	38.89	54	-15.11	-	-	2	101	H		
		* 11.755696	54.50	PK-U	38.5	0.00	-42.43	50.57	-	-	74	-23.43	2	101	H		
		1.466334	47.35	ADR	28.1	0.00	-47.45	28.00	54	-26	-	-	0	101	V		
		1.468404	58.82	PK-U	28.0	0.00	-47.45	39.37	-	-	74	-34.63	0	101	H		
		1.469266	47.09	ADR	28.0	0.00	-47.45	27.64	54	-26.36	-	-	0	101	H		
		1.502473	58.71	PK-U	27.9	0.00	-47.40	39.21	-	-	74	-34.79	0	101	V		
		3.028641	56.06	PK-U	32.9	0.00	-45.56	43.40	-	-	88.2	-44.8	0	101	H		
		3.034760	44.12	ADR	32.9	0.00	-45.55	31.47	68.2	-36.73	-	-	0	101	H		
		3.041006	44.19	ADR	33.0	0.00	-45.61	31.58	68.2	-36.62	-	-	0	101	V		
		3.043104	55.87	PK-U	33.0	0.00	-45.61	43.26	-	-	88.2	-44.94	0	101	V		
11.611576	54.25	PK-U	38.3	0.00	-42.10	50.45	-	-	74	-23.55	0	101	H				
11.621267	42.59	ADR	38.3	0.00	-42.27	38.62	54	-15.38	-	-	0	200	V				
11.622367	42.56	ADR	38.3	0.00	-42.33	38.53	54	-15.47	-	-	0	101	H				
11.622987	54.26	PK-U	38.3	0.00	-42.36	50.20	-	-	74	-23.8	0	200	V				

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

STATE B 80MHz

UNII-7 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbl/ Filtr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity		
EHT80 (SU Mode)	6545	6+5	*2.23587	61.30	PK-U	31.5	0.00	-50.41	42.39	-	-	74	-31.61	0	101	V		
			*2.248655	49.60	ADR	31.5	0.00	-50.17	30.93	54	-23.07	-	-	0	101	H		
			*2.252881	61.86	PK-U	31.5	0.00	-49.84	43.52	-	-	74	-30.48	0	101	H		
			*2.256267	49.69	ADR	31.5	0.00	-50.25	30.94	54	-23.06	-	-	0	101	V		
			*3.764062	58.58	PK-U	33.4	0.00	-47.94	44.04	-	-	74	-29.96	0	101	H		
			*3.767094	47.34	ADR	33.4	0.00	-48.10	32.64	54	-21.36	-	-	0	101	V		
			*3.768942	59.18	PK-U	33.4	0.00	-48.29	44.29	-	-	74	-29.71	0	101	V		
			*3.772141	47.10	ADR	33.4	0.00	-48.07	32.43	54	-21.57	-	-	0	101	H		
			*11.017869	58.78	PK-U	37.8	0.00	-45.74	50.84	-	-	74	-23.16	0	101	H		
			*11.018709	59.18	PK-U	37.8	0.00	-45.56	51.42	-	-	74	-22.58	0	101	V		
			*11.023308	47.00	ADR	37.8	0.00	-45.52	39.28	54	-14.72	-	-	0	101	V		
			*11.031932	47.08	ADR	37.8	0.00	-45.59	39.29	54	-14.71	-	-	0	101	H		
	*2.249093		61.63	PK-U	31.5	0.00	-50.08	43.05	-	-	74	-30.95	0	101	V			
	*2.254394		50.03	ADR	31.5	0.00	-50.14	31.39	54	-22.61	-	-	0	101	V			
	*2.255042		49.81	ADR	31.5	0.00	-49.92	31.39	54	-22.61	-	-	0	101	H			
	*2.260664		61.42	PK-U	31.5	0.00	-50.00	42.92	-	-	74	-31.08	0	101	H			
	*4.003153		47.54	ADR	33.5	0.00	-47.78	33.26	54	-20.74	-	-	0	101	V			
	*4.004468		47.26	ADR	33.5	0.00	-47.79	32.97	54	-21.03	-	-	0	101	H			
	*4.010129		59.03	PK-U	33.5	0.00	-48.00	44.53	-	-	74	-29.47	0	101	H			
	*4.012107		58.80	PK-U	33.5	0.00	-47.98	44.32	-	-	74	-29.68	0	101	V			
	*11.056444		46.72	ADR	37.8	0.00	-45.04	39.48	54	-14.52	-	-	0	101	H			
	*11.067903		58.72	PK-U	37.9	0.00	-44.90	51.72	-	-	74	-22.28	0	101	H			
	*11.069155		58.65	PK-U	37.9	0.00	-44.80	51.75	-	-	74	-22.25	0	101	V			
	*11.084381		46.83	ADR	37.9	0.00	-44.35	40.38	54	-13.62	-	-	0	101	V			
	*2.239429		58.19	PK-U	32.2	0.00	-47.56	42.83	-	-	74	-31.17	360	200	V			
	*2.241029		46.39	ADR	32.2	0.00	-47.56	31.03	54	-22.97	-	-	360	200	V			
	*2.244392		46.36	ADR	32.2	0.00	-47.59	30.97	54	-23.03	-	-	360	200	H			
	*2.246432		58.40	PK-U	32.2	0.00	-47.59	43.01	-	-	74	-30.99	360	200	H			
	*4.792367		43.68	ADR	34.2	0.00	-44.98	32.90	54	-21.1	-	-	360	200	V			
	*4.793329		55.90	PK-U	34.2	0.00	-44.98	45.12	-	-	74	-28.88	360	101	H			
	*4.794563		55.40	PK-U	34.2	0.00	-44.98	44.62	-	-	74	-29.38	360	200	V			
	*4.797818		43.71	ADR	34.2	0.00	-44.96	32.95	54	-21.05	-	-	360	101	H			
	*15.815426		54.19	PK-U	40.6	0.00	-41.22	53.57	-	-	74	-20.43	360	101	H			
	*15.819117		42.45	ADR	40.6	0.00	-41.23	41.82	54	-12.18	-	-	360	101	H			
	*15.822201		42.67	ADR	40.6	0.00	-41.20	42.07	54	-11.93	-	-	360	200	V			
	*15.823469		54.44	PK-U	40.6	0.00	-41.16	53.88	-	-	74	-20.12	360	200	V			
	EHT80 (484+242T RU93)		6545	6+5	*2.778124	59.48	PK-U	32.6	0.00	-48.40	43.68	-	-	74	-30.32	0	200	H
					*2.776084	47.97	ADR	32.6	0.00	-48.40	32.17	54	-21.83	-	-	0	200	H
					*3.936191	57.56	PK-U	33.4	0.00	-47.18	43.78	-	-	74	-30.22	0	101	H
					*3.930245	46.00	ADR	33.4	0.00	-47.30	32.10	54	-21.9	-	-	0	101	H
*2.778833		59.25			PK-U	32.6	0.00	-48.40	43.45	-	-	74	-30.55	0	101	V		
*2.776954		47.96			ADR	32.6	0.00	-48.40	32.16	54	-21.84	-	-	0	101	V		
*3.956384		57.99			PK-U	33.3	0.00	-47.20	44.09	-	-	74	-29.91	0	200	V		
*3.929116		46.03			ADR	33.4	0.00	-47.30	32.13	54	-21.87	-	-	0	200	V		
9.973586		56.52			PK-U	37.3	0.00	-45.14	48.68	-	-	88.2	-39.52	0	101	H		
9.983061		44.69			ADR	37.3	0.00	-45.21	36.78	68.2	-31.42	-	-	0	101	H		
9.984801		56.93			PK-U	37.3	0.00	-45.30	48.93	-	-	88.2	-39.27	0	200	V		
9.987213		44.77			ADR	37.3	0.00	-45.30	36.77	68.2	-31.43	-	-	0	200	V		
EHT80 (484+242T RU92)	6705	6+5	*2.714485	60.08	PK-U	32.6	0.00	-48.60	44.08	-	-	74	-29.92	0	199	H		
			*2.717831	48.48	ADR	32.6	0.00	-48.60	32.48	54	-21.52	-	-	0	199	H		
			*4.082387	58.22	PK-U	33.4	0.00	-46.96	44.66	-	-	74	-29.34	0	199	H		
			*4.082533	45.70	ADR	33.4	0.00	-46.95	32.15	54	-21.85	-	-	0	199	H		
			*2.707848	60.19	PK-U	32.6	0.00	-48.60	44.19	-	-	74	-29.81	0	199	V		
			*2.713660	48.29	ADR	32.6	0.00	-48.60	32.29	54	-21.71	-	-	0	199	V		
			*4.085391	57.25	PK-U	33.4	0.00	-46.90	43.75	-	-	74	-30.25	0	199	V		
			*4.100202	45.80	ADR	33.4	0.00	-47.10	32.10	54	-21.9	-	-	0	199	V		
			13.498482	54.59	PK-U	39.0	0.00	-42.70	50.89	-	-	88.2	-37.31	0	101	H		
			13.521215	43.07	ADR	39.0	0.00	-42.82	39.25	68.2	-28.95	-	-	0	101	H		
			13.508415	54.85	PK-U	39.0	0.00	-42.80	51.05	-	-	88.2	-37.15	0	200	V		
			13.512798	43.07	ADR	39.0	0.00	-42.78	39.29	68.2	-28.91	-	-	0	200	V		
EHT80 (484+242T RU90)	6865	6+5	*2.708886	59.54	PK-U	32.6	0.00	-48.60	43.54	-	-	74	-30.46	0	200	H		
			*2.711912	48.25	ADR	32.6	0.00	-48.60	32.25	54	-21.75	-	-	0	200	H		
			*3.756388	57.25	PK-U	33.4	0.00	-47.00	43.65	-	-	74	-30.35	0	200	H		
			*3.755321	45.69	ADR	33.4	0.00	-47.00	32.09	54	-21.91	-	-	0	200	H		
			*2.716409	59.93	PK-U	32.6	0.00	-48.60	43.93	-	-	74	-30.07	0	101	V		
			*2.713769	48.23	ADR	32.6	0.00	-48.60	32.23	54	-21.77	-	-	0	101	V		
			*3.761957	57.24	PK-U	33.4	0.00	-47.00	43.64	-	-	74	-30.36	0	200	V		
			*3.755415	45.55	ADR	33.4	0.00	-47.00	31.95	54	-22.05	-	-	0	200	V		
			13.537267	54.80	PK-U	39.0	0.00	-42.90	50.90	-	-	88.2	-37.3	0	101	H		
			13.541527	42.95	ADR	39.0	0.00	-42.85	39.10	68.2	-29.1	-	-	0	101	H		
			13.529860	54.84	PK-U	39.0	0.00	-42.90	50.94	-	-	88.2	-37.26	0	200	V		
			13.546938	42.98	ADR	39.0	0.00	-42.80	39.18	68.2	-29.02	-	-	0	200	V		

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

STATE A 160MHz

UNII-7 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbl/ Ftrr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT160 (SU Mode)	6665	6+5	* 2.242617	58.13	PK-U	32.2	0.00	-47.57	42.76	-	-	74	-31.24	0	200	H
			* 2.250968	46.28	ADR	32.2	0.00	-47.61	30.87	54	-23.13	-	-	0	101	V
			* 2.251380	46.34	ADR	32.2	0.00	-47.61	30.93	54	-23.07	-	-	0	200	H
			* 2.266273	58.03	PK-U	32.1	0.00	-47.63	42.50	-	-	74	-31.5	0	101	V
			* 4.734572	56.71	PK-U	34.2	0.00	-45.30	45.61	-	-	74	-28.39	0	200	H
			* 4.734922	55.84	PK-U	34.2	0.00	-45.29	44.75	-	-	74	-29.25	0	101	V
			* 4.737318	44.26	ADR	34.2	0.00	-45.29	33.17	54	-20.83	-	-	0	101	V
			* 4.737887	44.23	ADR	34.2	0.00	-45.29	33.14	54	-20.86	-	-	0	200	H
			* 16.026842	53.96	PK-U	40.9	0.00	-41.22	53.64	-	-	74	-20.36	0	200	H
			* 16.029386	42.12	ADR	40.9	0.00	-41.23	41.79	54	-12.21	-	-	0	101	V
	* 16.029766		53.68	PK-U	40.9	0.00	-41.24	53.34	-	-	74	-20.66	0	101	V	
	* 16.032794		42.54	ADR	40.9	0.00	-41.23	42.21	54	-11.79	-	-	0	200	H	
	* 2.269958		58.14	PK-U	32.1	0.00	-47.63	42.61	-	-	74	-31.39	0	200	H	
	* 2.288828		58.53	PK-U	32.1	0.00	-47.61	43.02	-	-	74	-30.98	0	200	V	
	* 2.296258		46.63	ADR	32.1	0.00	-47.62	31.11	54	-22.89	-	-	0	200	H	
	* 2.302302		46.50	ADR	32.1	0.00	-47.63	30.97	68.2	-37.23	-	-	0	200	V	
	* 4.799052		43.62	ADR	34.2	0.00	-44.95	32.87	54	-21.13	-	-	0	101	V	
	* 4.801036		43.76	ADR	34.2	0.00	-44.95	33.01	54	-20.99	-	-	0	200	H	
	* 4.803834		55.31	PK-U	34.2	0.00	-44.96	44.55	-	-	74	-29.45	0	101	V	
	* 4.815550		55.34	PK-U	34.2	0.00	-44.83	44.71	-	-	74	-29.29	0	200	H	
EHT160 (996+484T S95)	6665	* 15.912889	53.88	PK-U	40.7	0.00	-41.33	53.25	-	-	74	-20.75	0	199	H	
		* 15.914833	42.27	ADR	40.7	0.00	-41.31	41.66	54	-12.34	-	-	0	199	H	
		* 15.919945	42.35	ADR	40.7	0.00	-41.31	41.74	54	-12.26	-	-	0	199	V	
		* 15.922100	54.04	PK-U	40.7	0.00	-41.30	53.44	-	-	74	-20.56	0	199	V	
		* 4.016808	57.32	PK-U	33.5	0.00	-47.35	43.47	-	-	74	-30.53	360	101	H	
		* 4.020652	45.81	ADR	33.5	0.00	-47.45	31.86	54	-22.14	-	-	360	101	H	
		* 4.018477	57.27	PK-U	33.5	0.00	-47.42	43.35	-	-	74	-30.65	360	101	V	
		* 4.022432	45.80	ADR	33.5	0.00	-47.43	31.87	54	-22.13	-	-	360	101	V	
		* 11.447635	55.31	PK-U	38.1	0.00	-44.31	49.10	-	-	74	-24.9	360	101	H	
		* 11.448135	43.41	ADR	38.1	0.00	-44.30	37.21	54	-16.79	-	-	360	101	H	
		* 15.694591	53.83	PK-U	41.2	0.00	-42.28	52.75	-	-	74	-21.25	360	101	H	
		* 15.706246	42.04	ADR	41.2	0.00	-42.15	41.09	54	-12.91	-	-	360	101	H	
		* 11.432993	55.51	PK-U	38.0	0.00	-44.61	48.90	-	-	74	-25.1	360	101	V	
		* 11.441360	43.49	ADR	38.1	0.00	-44.46	37.13	54	-16.87	-	-	360	101	V	
EHT160 (996+484T RU94)	6825	* 15.709610	54.30	PK-U	41.2	0.00	-42.16	53.34	-	-	74	-20.66	360	101	V	
		* 15.705050	42.37	ADR	41.2	0.00	-42.09	41.48	54	-12.52	-	-	360	101	V	
		* 1.320673	31.34	ADR	29.2	0.00	-27.45	33.09	54	-20.91	-	-	0	100	H	
		* 1.325364	31.44	ADR	29.2	0.00	-27.55	33.09	54	-20.91	-	-	0	201	V	
		* 1.341985	43.14	PK-U	29.1	0.00	-27.51	44.73	-	-	74	-29.27	0	100	H	
		* 1.348399	42.98	PK-U	29.1	0.00	-27.44	44.64	-	-	74	-29.36	0	201	V	
		* 11.10413	45.01	ADR	38.0	0.00	-45.02	37.99	54	-16.01	-	-	0	100	H	
		* 11.129817	56.51	PK-U	38.0	0.00	-44.30	50.21	-	-	74	-23.79	0	100	H	
		* 11.142965	44.89	ADR	38.0	0.00	-44.03	38.86	54	-15.14	-	-	0	201	V	
		* 11.164991	56.37	PK-U	38.0	0.00	-44.65	49.72	-	-	74	-24.28	0	201	V	
		* 3.922625	42.46	PK-U	33.9	0.00	-25.20	51.16	-	-	74	-22.84	0	200	V	
		* 3.92613	30.82	ADR	33.9	0.00	-25.15	39.57	54	-14.43	-	-	0	200	V	
		* 3.94342	31.03	ADR	33.9	0.00	-25.26	39.67	54	-14.33	-	-	0	100	H	
		* 3.944131	43.11	PK-U	33.9	0.00	-25.26	51.75	-	-	74	-22.25	0	100	H	

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

STATE B 160MHz

UNII-7 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbl/ Ftrt/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT160 (SU Mode)	6665	6+5	1.944017	62.45	PK-U	31.50	0.00	-50.21	43.74	-	-	88.2	-44.46	0	101	H
			1.941817	50.55	ADR	31.50	0.00	-50.24	31.81	68.2	-36.39	-	-	0	101	H
			1.949111	62.10	PK-U	31.40	0.00	-50.19	43.31	-	-	88.2	-44.89	0	101	V
			1.941374	50.33	ADR	31.50	0.00	-50.26	31.57	68.2	-36.63	-	-	0	101	V
			10.204118	57.70	PK-U	37.60	0.00	-45.93	49.37	-	-	88.2	-38.83	0	200	H
			10.203774	45.68	ADR	37.60	0.00	-45.92	37.36	68.2	-30.84	-	-	0	200	H
			* 17.727846	53.60	PK-U	41.50	0.00	-39.42	55.68	-	-	74	-18.32	0	101	H
			* 17.736313	42.28	ADR	41.50	0.00	-39.74	44.04	54	-9.96	-	-	0	101	H
			10.188479	57.87	PK-U	37.60	0.00	-46.14	49.33	-	-	88.2	-38.87	0	101	V
			10.206745	45.85	ADR	37.60	0.00	-45.97	37.48	68.2	-30.72	-	-	0	101	V
	* 17.741788		54.35	PK-U	41.50	0.00	-39.95	55.9	-	-	74	-18.1	0	101	V	
	* 17.736809		42.28	ADR	41.50	0.00	-39.70	44.08	54	-9.92	-	-	0	101	V	
	* 2.237522		58.96	PK-U	32.2	0.00	-47.54	43.62	-	-	74	-30.38	0	200	V	
	* 2.248041		58.26	PK-U	32.2	0.00	-47.60	42.86	-	-	74	-31.14	0	101	H	
	* 2.250218		46.35	ADR	32.2	0.00	-47.62	30.93	54	-23.07	-	-	0	101	H	
	* 2.252214		46.24	ADR	32.2	0.00	-47.62	30.82	54	-23.18	-	-	0	200	V	
	* 4.735235		56.56	PK-U	34.2	0.00	-45.29	45.47	-	-	74	-28.53	0	101	H	
	* 4.738965		56.37	PK-U	34.2	0.00	-45.29	45.28	-	-	74	-28.72	0	200	V	
	* 4.742133		44.15	ADR	34.2	0.00	-45.26	33.09	54	-20.91	-	-	0	200	V	
	* 4.743168		44.44	ADR	34.2	0.00	-45.25	33.39	54	-20.61	-	-	0	101	H	
* 15.831041	54.68	PK-U	40.6	0.00	-41.05	54.23	-	-	74	-19.77	0	101	H			
* 15.835773	54.32	PK-U	40.6	0.00	-41.02	53.90	-	-	74	-20.1	0	200	V			
* 15.836825	42.42	ADR	40.6	0.00	-41.01	42.01	54	-11.99	-	-	0	101	H			
* 15.847928	42.70	ADR	40.6	0.00	-40.99	42.31	54	-11.69	-	-	0	200	V			
EHT160 (996+484T S95)	6665	6+5	1.908301	58.57	PK-U	31.0	0.00	-46.20	43.37	-	-	88.2	-44.83	1	101	H
			1.912618	58.00	PK-U	31.1	0.00	-46.24	42.86	-	-	88.2	-45.34	1	200	V
			1.913725	46.41	ADR	31.1	0.00	-46.20	31.31	68.2	-36.89	-	-	1	200	V
			1.915989	46.48	ADR	31.1	0.00	-46.20	31.38	68.2	-36.82	-	-	1	101	H
			10.111999	54.03	PK-U	37.7	0.00	-42.30	49.43	-	-	88.2	-38.77	1	101	V
			10.119490	42.44	ADR	37.7	0.00	-42.05	38.09	68.2	-30.11	-	-	1	101	V
			10.122906	42.35	ADR	37.7	0.00	-42.00	38.05	68.2	-30.15	-	-	1	101	H
			10.133693	54.69	PK-U	37.7	0.00	-42.40	49.99	-	-	88.2	-38.21	1	101	H
			13.929312	55.60	PK-U	39.0	0.00	-42.37	52.23	-	-	88.2	-35.97	1	101	V
			13.937055	55.09	PK-U	39.0	0.00	-42.21	51.88	-	-	88.2	-36.32	1	101	H
			13.938819	43.33	ADR	39.0	0.00	-42.14	40.19	68.2	-28.01	-	-	1	101	H
			13.950678	43.32	ADR	39.1	0.00	-42.13	40.29	68.2	-27.91	-	-	1	101	V
			EHT160 (996+484T RU94)	6825	6+5	* 11.304491	41.97	ADR	38.0	0.00	-42.10	37.87	54	-16.13	-	-
* 11.315326	53.80	PK-U				38.0	0.00	-41.57	50.23	-	-	74	-23.77	2	101	V
* 11.319657	53.85	PK-U				38.0	0.00	-41.47	50.38	-	-	74	-23.62	2	101	H
* 11.323041	42.06	ADR				38.0	0.00	-41.50	38.56	54	-15.44	-	-	2	101	H
* 15.850384	55.34	PK-U				40.5	0.00	-43.10	52.74	-	-	74	-21.26	2	200	H
* 15.863510	43.74	ADR				40.5	0.00	-43.00	41.24	54	-12.76	-	-	2	200	V
* 15.864910	43.73	ADR				40.5	0.00	-43.00	41.23	54	-12.77	-	-	2	200	H
* 15.866538	55.50	PK-U				40.5	0.00	-42.90	53.10	-	-	74	-20.9	2	200	V
* 3.801371	55.13	PK-U				33.4	0.00	-45.20	43.33	-	-	74	-30.67	2	200	H
* 3.801962	43.54	ADR				33.4	0.00	-45.20	31.74	54	-22.26	-	-	2	200	H
* 3.802468	43.39	ADR				33.4	0.00	-45.15	31.64	54	-22.36	-	-	2	101	V
* 3.839957	54.94	PK-U				33.4	0.00	-45.20	43.14	-	-	74	-30.86	2	101	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

STATE A WORST-CASE HARMONICS AND SPURIOUS EMISSIONS

802.11be EHT80 / 183 & 6865 / 2TX / CDD / SU

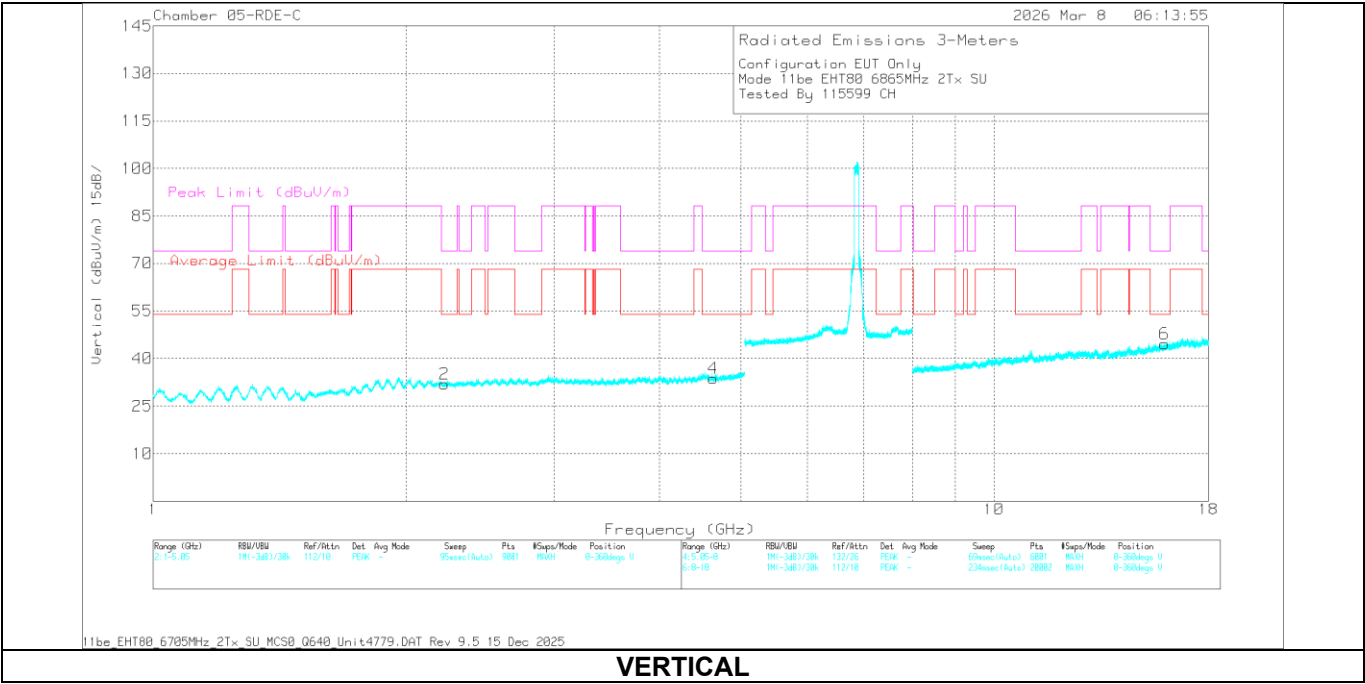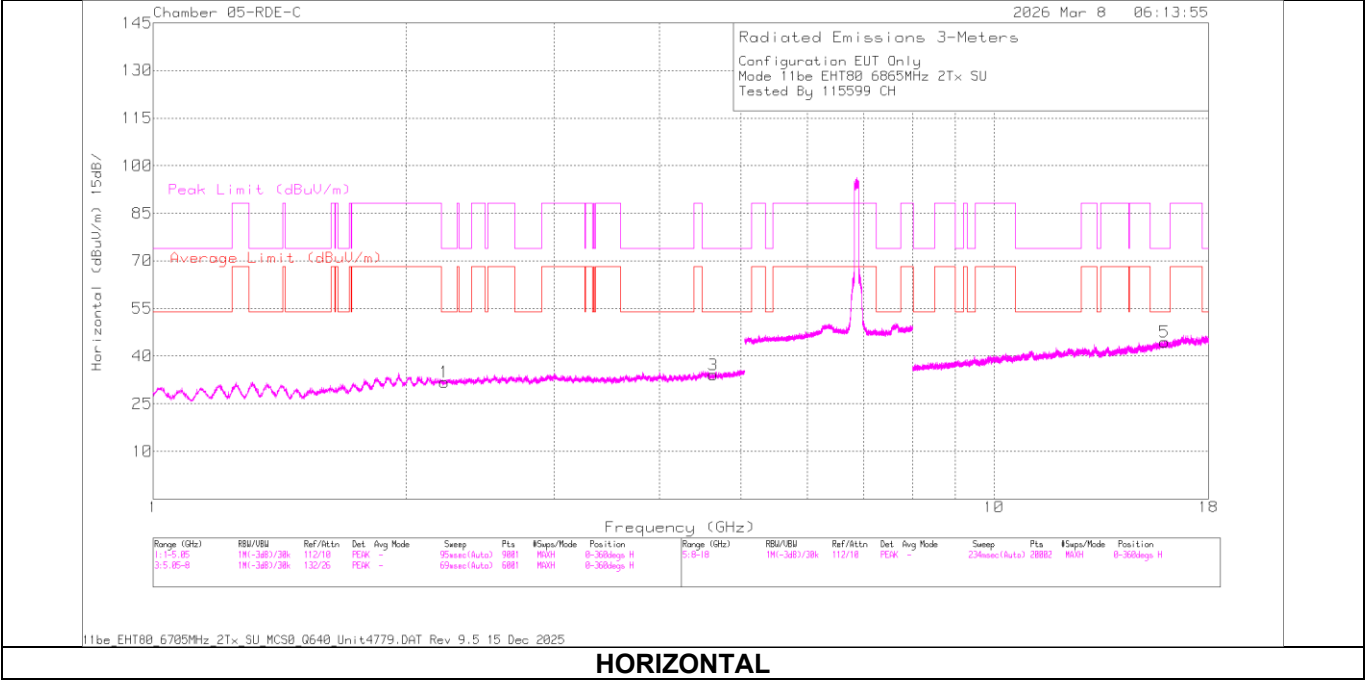

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbt/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 2.200453	49.63	ADR	31.4	0.00	-50.01	31.02	54	-22.98	-	-	0	199	H
* 2.201844	60.93	PK-U	31.4	0.00	-49.90	42.43	-	-	74	-31.57	0	199	H
* 2.228574	61.63	PK-U	31.5	0.00	-50.19	42.94	-	-	74	-31.06	0	101	V
* 2.232751	49.40	ADR	31.5	0.00	-49.80	31.10	54	-22.9	-	-	0	101	V
* 4.641678	59.25	PK-U	34.2	0.00	-48.80	44.65	-	-	74	-29.35	0	101	V
* 4.652837	47.55	ADR	34.2	0.00	-48.88	32.87	54	-21.13	-	-	0	101	H
* 4.653517	47.54	ADR	34.2	0.00	-48.80	32.94	54	-21.06	-	-	0	101	V
* 4.654046	59.45	PK-U	34.2	0.00	-48.71	44.94	-	-	74	-29.06	0	101	H
* 15.930892	59.37	PK-U	40.7	0.00	-45.62	54.45	-	-	74	-19.55	0	200	H
* 15.941267	47.41	ADR	40.7	0.00	-45.23	42.88	54	-11.12	-	-	0	200	H
* 15.948775	47.55	ADR	40.7	0.00	-45.55	42.70	54	-11.3	-	-	0	101	V
* 15.964249	59.33	PK-U	40.7	0.00	-45.50	54.53	-	-	74	-19.47	0	101	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

STATE B WORST-CASE HARMONICS AND SPURIOUS EMISSIONS

802.11be EHT160 / 143 & 6665 / 2TX / CDD / SU

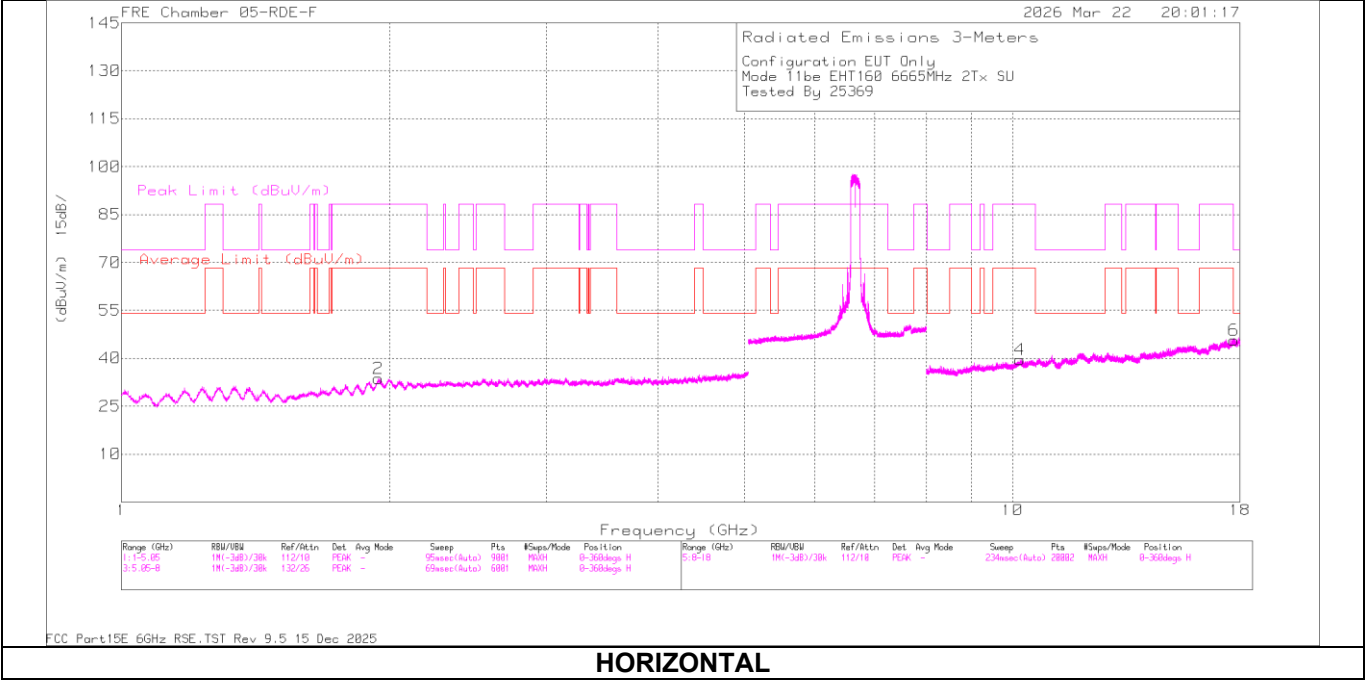

HORIZONTAL

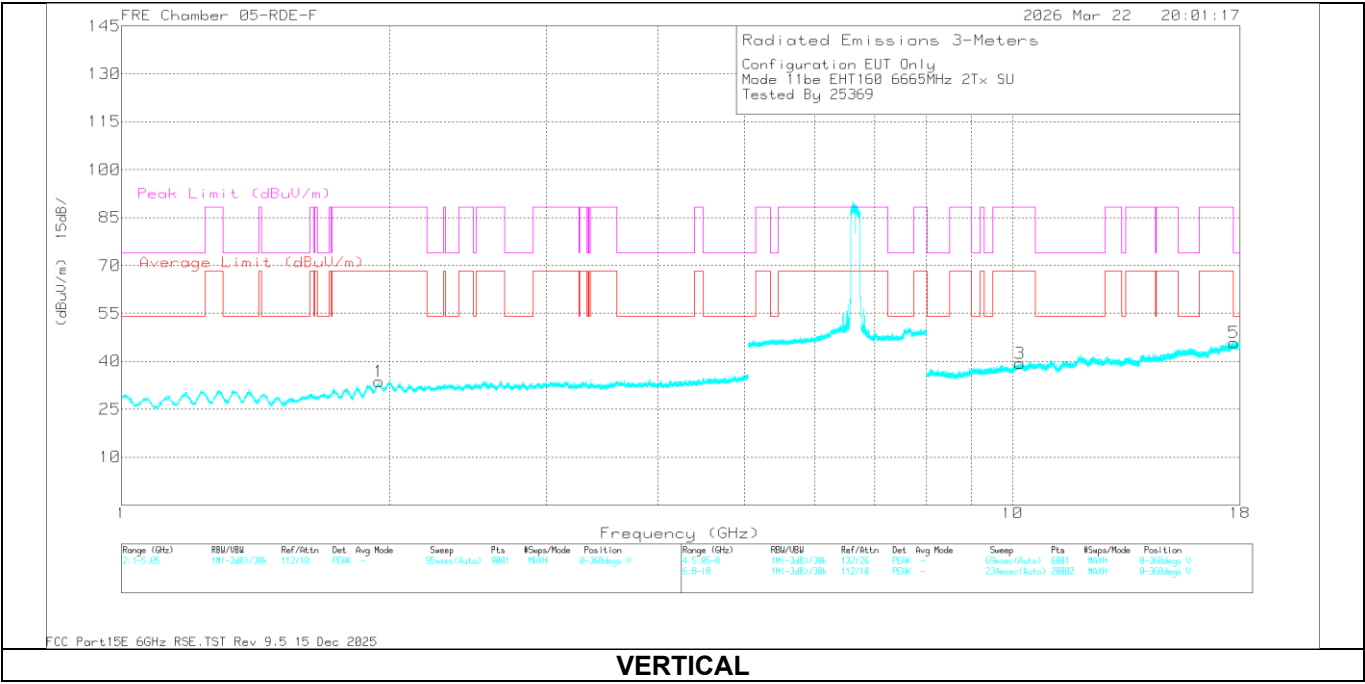

VERTICAL

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbt/ Filt/Pad (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1.944017	62.45	62.45	PK-U	31.50	0.00	-50.21	43.74	-	-	88.2	-44.46	0	101
1.941817	50.55	50.55	ADR	31.50	0.00	-50.24	31.81	68.2	-36.39	-	-	0	101
1.949111	62.10	62.1	PK-U	31.40	0.00	-50.19	43.31	-	-	88.2	-44.89	0	101
1.941374	50.33	50.33	ADR	31.50	0.00	-50.26	31.57	68.2	-36.63	-	-	0	101
10.204118	57.70	57.7	PK-U	37.60	0.00	-45.93	49.37	-	-	88.2	-38.83	0	200
10.203774	45.68	45.68	ADR	37.60	0.00	-45.92	37.36	68.2	-30.84	-	-	0	200
* 17.727846	53.60	53.6	PK-U	41.50	0.00	-39.42	55.68	-	-	74	-18.32	0	101
* 17.736313	42.28	42.28	ADR	41.50	0.00	-39.74	44.04	54	-9.96	-	-	0	101
10.188479	57.87	57.87	PK-U	37.60	0.00	-46.14	49.33	-	-	88.2	-38.87	0	101
10.206745	45.85	45.85	ADR	37.60	0.00	-45.97	37.48	68.2	-30.72	-	-	0	101
* 17.741788	54.35	54.35	PK-U	41.50	0.00	-39.95	55.9	-	-	74	-18.1	0	101
* 17.736809	42.28	42.28	ADR	41.50	0.00	-39.70	44.08	54	-9.92	-	-	0	101

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.1.8. 802.11a SISO MODE IN UNII-8 BAND – BANDEDGE**STATE A**

UNII-8 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11a	7115	6	* 7.388813	-60.39	RMS	35.7	11.8	0.00	-35.40	-48.29	-41.2	-7.09	-	-	99	280	H
			7.125000	-27.79	Pk	35.7	11.8	0.00	-35.70	-15.99	-	-	-7	-8.99	99	280	H
			7.125000	-44.66	RMS	35.7	11.8	0.00	-35.70	-32.86	-27	-5.86	-	-	99	280	H
			7.125068	-28.02	Pk	35.7	11.8	0.00	-35.70	-16.22	-	-	-7	-9.22	99	280	H
			7.125000	-23.48	Pk	35.7	11.8	0.00	-35.70	-11.68	-	-	-7	-4.68	41	169	V
			7.125000	-41.54	RMS	35.7	11.8	0.00	-35.70	-29.74	-27	-2.74	-	-	41	169	V
			7.125145	-42.37	RMS	35.7	11.8	0.00	-35.70	-30.57	-27	-3.57	-	-	41	169	V
			7.125223	-23.86	Pk	35.7	11.8	0.00	-35.70	-12.06	-	-	-7	-5.06	41	169	V
		5	* 7.276501	-48.03	Pk	35.6	11.8	0.00	-35.65	-36.28	-	-	-21.2	-15.08	344	319	H
			* 7.396591	-60.38	RMS	35.7	11.8	0.00	-35.34	-48.22	-41.2	-7.02	-	-	344	319	H
			7.125000	-35.70	Pk	35.7	11.8	0.00	-35.70	-23.90	-	-	-7	-16.90	344	319	H
			7.125000	-53.33	RMS	35.7	11.8	0.00	-35.70	-41.53	-27	-14.53	-	-	344	319	H
			7.125000	-23.93	Pk	35.7	11.8	0.00	-35.70	-12.13	-	-	-7	-5.13	13	195	V
			7.125000	-41.67	RMS	35.7	11.8	0.00	-35.70	-29.87	-27	-2.87	-	-	13	195	V
			7.125068	-43.18	RMS	35.7	11.8	0.00	-35.70	-31.38	-27	-4.38	-	-	13	195	V
			7.125223	-24.81	Pk	35.7	11.8	0.00	-35.70	-13.01	-	-	-7	-6.01	13	195	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

STATE B

UNII-8 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11a	7115	6	7.125000	-24.96	Pk	35.7	11.8	0.00	-36.81	-14.27	-	-	-7	-7.27	31	309	H
			7.125145	-25.27	Pk	35.7	11.8	0.00	-36.81	-14.58	-	-	-7	-7.58	31	309	H
			7.125000	-42.49	RMS	35.7	11.8	0.00	-36.81	-31.80	-27	-4.80	-	-	31	309	H
			7.125068	-43.42	RMS	35.7	11.8	0.00	-36.81	-32.73	-27	-5.73	-	-	31	309	H
			7.125000	-23.06	Pk	35.7	11.8	0.00	-36.81	-12.37	-	-	-7	-5.37	327	178	V
			7.125068	-24.09	Pk	35.7	11.8	0.00	-36.81	-13.40	-	-	-7	-6.40	327	178	V
			7.125000	-41.72	RMS	35.7	11.8	0.00	-36.81	-31.03	-27	-4.03	-	-	327	178	V
			7.125068	-43.59	RMS	35.7	11.8	0.00	-36.81	-32.90	-27	-5.90	-	-	327	178	V
		5	7.125000	-38.63	Pk	35.8	11.8	0.00	-28.7	-19.73	-	-	-7	-12.73	31	389	H
			7.125068	-39.61	Pk	35.8	11.8	0.00	-28.7	-20.71	-	-	-7	-13.71	31	389	H
			7.125000	-57.27	RMS	35.8	11.8	0.00	-28.7	-38.37	-27	-11.37	-	-	31	389	H
			* 7.482146	-66.90	RMS	35.8	11.8	0.00	-28.1	-47.40	-41.2	-6.20	-	-	31	389	H
			7.125000	-30.57	Pk	35.8	11.8	0.00	-28.7	-11.67	-	-	-7	-4.67	32	254	V
			7.125068	-32.29	Pk	35.8	11.8	0.00	-28.7	-13.39	-	-	-7	-6.39	32	254	V
			7.125000	-49.27	RMS	35.8	11.8	0.00	-28.7	-30.37	-27	-3.37	-	-	32	254	V
			7.125068	-49.99	RMS	35.8	11.8	0.00	-28.7	-31.09	-27	-4.09	-	-	32	254	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.9. 802.11be SISO SU MODE IN UNII-8 BAND – BANDEDGE

STATE A

UNII-8 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading ERP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (SU Mode)	7095	6	7.125000	-41.12	Pk	35.7	11.8	0.00	-37.80	-31.42	-	-	-7	-24.42	76	233	H
			7.467057	-46.86	Pk	35.7	11.8	0.00	-38.11	-37.47	-	-	-21.2	-16.27	76	233	H
			7.125000	-56.61	RMS	35.7	11.8	0.00	-37.80	-46.91	-27	-19.91	-	-	76	233	H
			7.503224	-59.00	RMS	35.7	11.8	0.00	-37.99	-49.49	-41.2	-8.29	-	-	76	233	H
			7.125000	-36.90	Pk	35.7	11.8	0.00	-37.80	-27.20	-	-	-7	-20.20	50	161	V
			7.271368	-47.78	Pk	35.6	11.8	0.00	-37.51	-37.89	-	-	-21.2	-16.69	50	161	V
		5	7.125000	-52.96	RMS	35.7	11.8	0.00	-37.80	-43.26	-27	-16.26	-	-	50	161	V
			7.347513	-58.89	RMS	35.6	11.8	0.00	-37.85	-49.34	-41.2	-8.14	-	-	50	161	V
			* 7.435557	-47.69	Pk	35.7	11.8	0.00	-35.50	-35.69	-	-	-21.20	-14.49	324.00	111	H
			* 7.316090	-59.99	RMS	35.6	11.8	0.00	-35.50	-48.09	-41.20	-6.89	-	-	324.00	111	H
			7.125000	-43.00	Pk	35.7	11.8	0.00	-35.70	-31.20	-	-	-7.00	-24.2	324.00	111	H
			7.125000	-57.73	RMS	35.7	11.8	0.00	-35.70	-45.93	-27.00	-18.93	-	-	324.00	111	H
			* 7.348602	-60.13	RMS	35.7	11.8	0.00	-35.50	-48.13	-41.20	-6.93	-	-	51.00	263	V
			7.125000	-33.23	Pk	35.7	11.8	0.00	-35.70	-21.43	-	-	-7.00	-14.43	51.00	263	V
			7.125000	-52.29	RMS	35.7	11.8	0.00	-35.70	-40.49	-27.00	-13.49	-	-	51.00	263	V
			7.125768	-31.80	Pk	35.7	11.8	0.00	-35.70	-20.00	-	-	-7.00	-13	51.00	263	V
EHT40 (SU Mode)	7085	6	7.125000	-36.64	Pk	35.8	11.8	0.00	-35.90	-24.94	-	-	-7	-17.94	347	137	H
			7.128412	-34.18	Pk	35.8	11.8	0.00	-35.90	-22.48	-	-	-7	-15.48	347	137	H
			7.125000	-51.30	RMS	35.8	11.8	0.00	-35.90	-39.60	-27	-12.60	-	-	347	137	H
			7.365790	-60.43	RMS	35.7	11.8	0.00	-35.70	-48.63	-41.2	-7.43	-	-	347	137	H
			7.125000	-31.89	Pk	35.8	11.8	0.00	-35.90	-20.19	-	-	-7	-13.19	51	156	V
			7.127012	-30.28	Pk	35.8	11.8	0.00	-35.90	-18.58	-	-	-7	-11.58	51	156	V
		5	7.125000	-46.85	RMS	35.8	11.8	0.00	-35.90	-35.15	-27	-8.15	-	-	51	156	V
			7.125223	-46.20	RMS	35.8	11.8	0.00	-35.90	-34.50	-27	-7.50	-	-	51	156	V
			7.125000	-29.76	Pk	35.6	11.8	0.00	-33.86	-16.22	-	-	-7	-9.22	134	201	V
			7.125068	-28.08	Pk	35.6	11.8	0.00	-33.86	-14.54	-	-	-7	-7.54	134	201	V
			7.125000	-43.61	RMS	35.6	11.8	0.00	-33.86	-30.07	-27	-3.07	-	-	134	201	V
			7.125145	-43.48	RMS	35.6	11.8	0.00	-33.86	-29.94	-27	-2.94	-	-	134	201	V
			7.125000	-37.46	Pk	35.6	11.8	0.00	-33.86	-23.92	-	-	-7	-16.92	95	104	H
			7.125145	-34.20	Pk	35.6	11.8	0.00	-33.86	-20.66	-	-	-7	-13.66	95	104	H
			7.125	-51.68	RMS	35.6	11.8	0	-33.86	-38.14	-27	-11.14	-	-	95	104	H
			* 7.386557	-61.1	RMS	35.6	11.8	0	-33.49	-47.19	-41.2	-5.99	-	-	95	104	H
EHT80 (SU Mode)	7025	6	7.125000	-45.72	Pk	35.6	11.8	0.00	-33.86	-32.18	-	-	-7	-25.18	114	163	H
			* 7.452746	-49.20	Pk	35.6	11.8	0.00	-33.24	-35.04	-	-	-21.2	-13.84	114	163	H
			7.125000	-59.07	RMS	35.6	11.8	0.00	-33.86	-45.53	-27	-18.53	-	-	114	163	H
			* 7.512791	-61.65	RMS	35.7	11.8	0.00	-33.01	-47.16	-41.2	-5.96	-	-	114	163	H
			7.125000	-41.59	Pk	35.6	11.8	0.00	-33.86	-28.05	-	-	-7	-21.05	196	196	V
			* 7.419613	-49.19	Pk	35.6	11.8	0.00	-33.36	-35.15	-	-	-21.2	-13.95	196	196	V
		5	7.125000	-55.08	RMS	35.6	11.8	0.00	-33.86	-41.54	-27	-14.54	-	-	196	196	V
			* 7.519324	-61.85	RMS	35.7	11.8	0.00	-32.98	-47.33	-41.2	-6.13	-	-	196	196	V
			7.125000	-42.38	Pk	35.6	11.8	0.00	-35.52	-30.50	-	-	-7	-23.50	357	395	H
			7.284279	-47.83	Pk	35.6	11.8	0.00	-35.34	-35.77	-	-	-21.2	-14.57	357	395	H
			7.125000	-56.29	RMS	35.6	11.8	0.00	-35.52	-44.41	-27	-17.41	-	-	357	395	H
			7.277435	-60.16	RMS	35.6	11.8	0.00	-35.27	-48.03	-41.2	-6.83	-	-	357	395	H
			7.125000	-35.84	Pk	35.6	11.8	0.00	-35.52	-23.96	-	-	-7	-16.96	27	256	V
			7.126079	-33.71	Pk	35.6	11.8	0.00	-35.53	-21.84	-	-	-7	-14.84	27	256	V
			7.125000	-50.68	RMS	35.6	11.8	0.00	-35.52	-38.80	-27	-11.80	-	-	27	256	V
			7.250057	-60.21	RMS	35.6	11.8	0.00	-35.24	-48.05	-41.2	-6.85	-	-	27	256	V
EHT160 (SU Mode)	6985	6	7.125000	-42.90	Pk	35.6	11.8	0.00	-33.86	-29.36	-	-	-7	-22.36	114	101	H
			* 7.391924	-49.17	Pk	35.6	11.8	0.00	-33.47	-35.24	-	-	-21.2	-14.04	114	101	H
			7.125000	-54.50	RMS	35.6	11.8	0.14	-33.86	-40.82	-27	-13.82	-	-	114	101	H
			* 7.519402	-61.77	RMS	35.7	11.8	0.14	-32.98	-47.11	-41.2	-5.91	-	-	114	101	H
			7.125000	-39.55	Pk	35.6	11.8	0.00	-33.86	-26.01	-	-	-7	-19.01	189	198	V
			7.132379	-33.32	Pk	35.6	11.8	0.00	-33.84	-19.76	-	-	-7	-12.76	189	198	V
		5	7.125000	-51.84	RMS	35.6	11.8	0.14	-33.86	-38.16	-27	-11.16	-	-	189	198	V
			* 7.523602	-61.88	RMS	35.7	11.8	0.14	-32.97	-47.21	-41.2	-6.01	-	-	189	198	V
			7.125000	-41.05	Pk	35.7	11.8	0.00	-36.30	-29.85	-	-	-7	-22.85	254	113	H
			* 7.305590	-47.49	Pk	35.6	11.8	0.00	-36.30	-36.39	-	-	-21.2	-15.19	254	113	H
			7.125000	-52.38	RMS	35.7	11.8	0.14	-36.30	-41.04	-27	-14.04	-	-	254	113	H
			* 7.305824	-59.84	RMS	35.6	11.8	0.14	-36.30	-48.60	-41.2	-7.40	-	-	254	113	H
			7.125000	-31.72	Pk	35.7	11.8	0.00	-36.30	-20.52	-	-	-7	-13.52	320	196	V
			7.132223	-27.04	Pk	35.7	11.8	0.00	-36.40	-15.94	-	-	-7	-8.94	320	196	V
			7.125000	-43.93	RMS	35.7	11.8	0.14	-36.30	-32.59	-27	-5.59	-	-	320	196	V
			7.130823	-42.54	RMS	35.7	11.8	0.14	-36.30	-31.20	-27	-4.20	-	-	320	196	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

STATE B

UNII-8 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (SU Mode)	7095	6	7.125000	-43.75	Pk	35.6	11.8	0.00	-35.52	-31.87	-	-	-7	-24.87	47	211	H
			7.254257	-48.55	Pk	35.6	11.8	0.00	-35.24	-36.39	-	-	-21.2	-15.19	47	211	H
			7.125000	-57.68	RMS	35.6	11.8	0.00	-35.52	-45.80	-27	-18.80	-	-	47	211	H
			7.291668	-60.43	RMS	35.6	11.8	0.00	-35.33	-48.36	-41.2	-7.16	-	-	47	211	H
			7.125000	-41.58	Pk	35.6	11.8	0.00	-35.52	-29.70	-	-	-7	-22.70	2	176	V
			7.326435	-48.18	Pk	35.6	11.8	0.00	-35.56	-36.34	-	-	-21.2	-15.14	2	176	V
			7.125000	-57.05	RMS	35.6	11.8	0.00	-35.52	-45.17	-27	-18.17	-	-	2	176	V
			7.260401	-60.26	RMS	35.6	11.8	0.00	-35.22	-48.08	-41.2	-6.88	-	-	2	176	V
		5	7.125000	-45.27	Pk	35.8	11.8	0.00	-28.7	-26.37	-	-	-7.00	-19.37	85.00	389	H
			* 7.474602	-54.48	Pk	35.8	11.8	0.00	-28.1	-34.98	-	-	-21.20	-13.78	85.00	389	H
			7.125000	-62.46	RMS	35.8	11.8	0.00	-28.7	-43.56	-27.00	-16.56	-	-	85.00	389	H
			* 7.503457	-66.91	RMS	35.8	11.8	0.00	-28.1	-47.41	-41.20	-6.21	-	-	85.00	389	H
			7.125000	-39.45	Pk	35.8	11.8	0.00	-28.7	-20.55	-	-	-7.00	-13.55	349.00	149	V
			7.125223	-37.04	Pk	35.8	11.8	0.00	-28.7	-18.14	-	-	-7.00	-11.14	349.00	149	V
			7.125000	-57.55	RMS	35.8	11.8	0.00	-28.7	-38.65	-27.00	-11.65	-	-	349.00	149	V
			* 7.480980	-66.77	RMS	35.8	11.8	0.00	-28.1	-47.27	-41.20	-6.07	-	-	349.00	149	V
EHT40 (SU Mode)	7085	6	7.125000	-33.94	Pk	35.6	11.8	0.00	-33.86	-20.40	-	-	-7	-13.40	44	277	H
			7.125534	-31.34	Pk	35.6	11.8	0.00	-33.86	-17.80	-	-	-7	-10.80	44	277	H
			7.125000	-47.83	RMS	35.6	11.8	0.00	-33.86	-34.29	-27	-7.29	-	-	44	277	H
			* 7.506569	-61.27	RMS	35.6	11.8	0.00	-33.03	-46.90	-41.2	-5.70	-	-	44	277	H
			7.125000	-30.93	Pk	35.6	11.8	0.00	-33.86	-17.39	-	-	-7	-10.39	356	152	V
			7.127323	-30.18	Pk	35.6	11.8	0.00	-33.85	-16.63	-	-	-7	-9.63	356	152	V
			7.125000	-47.16	RMS	35.6	11.8	0.00	-33.86	-33.62	-27	-6.62	-	-	356	152	V
			* 7.506802	-61.65	RMS	35.6	11.8	0.00	-33.03	-47.28	-41.2	-6.08	-	-	356	152	V
		5	7.125000	-36.97	Pk	35.6	11.8	0.00	-33.86	-23.43	-	-	-7	-16.43	85	110	H
			7.126468	-34.53	Pk	35.6	11.8	0.00	-33.86	-20.99	-	-	-7	-13.99	85	110	H
			7.125000	-50.37	RMS	35.6	11.8	0.00	-33.86	-36.83	-27	-9.83	-	-	85	110	H
			* 7.511158	-61.50	RMS	35.7	11.8	0.00	-33.02	-47.02	-41.2	-5.82	-	-	85	110	H
			7.125000	-29.97	Pk	35.6	11.8	0.00	-33.86	-16.43	-	-	-7	-9.43	117	193	V
			7.132456	-28.73	Pk	35.6	11.8	0.00	-33.84	-15.17	-	-	-7	-8.17	117	193	V
			7.125000	-44.62	RMS	35.6	11.8	0.00	-33.86	-31.08	-27	-4.08	-	-	117	193	V
			7.125145	-43.40	RMS	35.6	11.8	0.00	-33.86	-29.86	-27	-2.86	-	-	117	193	V
EHT80 (SU Mode)	7025	6	7.125000	-45.30	Pk	35.8	11.8	0.00	-35.90	-33.60	-	-	-7	-26.60	332	163	H
			7.250135	-48.47	Pk	35.6	11.8	0.00	-35.90	-36.97	-	-	-21.2	-15.77	332	163	H
			7.125000	-57.53	RMS	35.8	11.8	0.00	-35.90	-45.83	-27	-18.83	-	-	332	163	H
			7.508980	-60.86	RMS	35.8	11.8	0.00	-35.60	-48.86	-41.2	-7.66	-	-	332	163	H
			7.125000	-42.67	Pk	35.8	11.8	0.00	-35.90	-30.97	-	-	-7	-23.97	47	133	V
			7.376990	-48.29	Pk	35.7	11.8	0.00	-35.80	-36.59	-	-	-21.2	-15.39	47	133	V
			7.125000	-55.22	RMS	35.8	11.8	0.00	-35.90	-43.52	-27	-16.52	-	-	47	133	V
			7.481446	-60.60	RMS	35.8	11.8	0.00	-35.80	-48.80	-41.2	-7.60	-	-	47	133	V
		5	7.125000	-44.38	Pk	35.6	11.8	0.00	-35.52	-32.50	-	-	-7	-25.50	347	306	H
			7.301546	-48.48	Pk	35.6	11.8	0.00	-35.35	-36.43	-	-	-21.2	-15.23	347	306	H
			7.125000	-56.33	RMS	35.6	11.8	0.00	-35.52	-44.45	-27	-17.45	-	-	347	306	H
			7.262735	-60.28	RMS	35.6	11.8	0.00	-35.24	-48.12	-41.2	-6.92	-	-	347	306	H
			7.125000	-37.10	Pk	35.6	11.8	0.00	-35.52	-25.22	-	-	-7	-18.22	344	346	V
			7.374735	-47.82	Pk	35.6	11.8	0.00	-35.60	-36.02	-	-	-21.2	-14.82	344	346	V
			7.125000	-51.64	RMS	35.6	11.8	0.00	-35.52	-39.76	-27	-12.76	-	-	344	346	V
			7.265379	-60.16	RMS	35.6	11.8	0.00	-35.29	-48.05	-41.2	-6.85	-	-	344	346	V
EHT160 (SU Mode)	6985	6	7.125000	-50.59	Pk	35.5	11.8	0.00	-24.1	-27.39	-	-	-7	-20.39	6	212	H
			7.132379	-44.60	Pk	35.5	11.8	0.00	-24.2	-21.50	-	-	-7	-14.50	6	212	H
			7.125000	-62.48	RMS	35.5	11.8	0.14	-24.1	-39.14	-27	-12.14	-	-	6	212	H
			* 7.381657	-73.41	RMS	35.6	11.8	0.14	-23.7	-49.57	-41.2	-8.37	-	-	6	212	H
			7.125000	-46.66	Pk	35.5	11.8	0.00	-24.1	-23.46	-	-	-7	-16.46	331	158	V
			7.132379	-41.24	Pk	35.5	11.8	0.00	-24.2	-18.14	-	-	-7	-11.14	331	158	V
			7.125000	-58.99	RMS	35.5	11.8	0.14	-24.1	-35.65	-27	-8.65	-	-	331	158	V
			7.128645	-56.90	RMS	35.5	11.8	0.14	-24.2	-33.66	-27	-6.66	-	-	331	158	V
		5	7.125000	-55.44	Pk	35.7	11.8	0.00	-22.76	-30.70	-	-	-7	-23.7	227	266	H
			* 7.514658	-61.25	Pk	35.7	11.8	0.00	-22.14	-35.89	-	-	-21.2	-14.69	227	266	H
			7.125000	-66.44	RMS	35.7	11.8	0.14	-22.76	-41.56	-27	-14.56	-	-	227	266	H
			* 7.495757	-73.46	RMS	35.7	11.8	0.14	-22.15	-47.97	-41.2	-6.77	-	-	227	266	H
			7.125000	-44.90	Pk	35.7	11.8	0.00	-22.76	-20.16	-	-	-7	-13.16	189	246	V
			7.127245	-41.82	Pk	35.7	11.8	0.00	-22.80	-17.12	-	-	-7	-10.12	189	246	V
			7.125	-56.01	RMS	35.7	11.8	0.14	-22.76	-31.13	-27	-4.13	-	-	189	246	V
			7.127712	-55.2	RMS	35.7	11.8	0.14	-22.83	-30.39	-27	-3.39	-	-	189	246	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.10. 802.11be SISO PARTIAL RU MODE IN UNII-8 BAND – BANDEDGE

STATE A

UNII-8 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (26T RU8)	7095	6	* 7.381502	-48.21	Pk	35.7	11.8	0.00	-35.35	-36.06	-	-	-21.20	-14.86	57.00	284	H
			* 7.522824	-60.20	RMS	35.7	11.8	0.00	-35.54	-48.24	-41.20	-7.04	-	-	57.00	284	H
			7.125000	-50.47	Pk	35.7	11.8	0.00	-35.70	-38.67	-	-	-7.00	-31.67	57.00	284	H
			7.125000	-61.09	RMS	35.7	11.8	0.00	-35.70	-49.29	-27.00	-22.29	-	-	57.00	284	H
			* 7.318424	-47.91	Pk	35.6	11.8	0.00	-35.50	-36.01	-	-	-21.20	-14.81	47.00	147	V
			* 7.397057	-60.52	RMS	35.7	11.8	0.00	-35.31	-48.33	-41.20	-7.13	-	-	47.00	147	V
			7.125000	-50.30	Pk	35.7	11.8	0.00	-35.70	-38.50	-	-	-7.00	-31.5	47.00	147	V
			7.125000	-61.42	RMS	35.7	11.8	0.00	-35.70	-49.62	-27.00	-22.62	-	-	47.00	147	V
		5	* 7.411913	-48.02	Pk	35.7	11.8	0.00	-35.40	-35.92	-	-	-21.20	-14.72	30.00	390	H
			* 7.418991	-60.36	RMS	35.7	11.8	0.00	-35.40	-48.26	-41.20	-7.06	-	-	30.00	390	H
			7.125000	-49.89	Pk	35.7	11.8	0.00	-35.70	-38.09	-	-	-7.00	-31.09	30.00	390	H
			7.125000	-60.97	RMS	35.7	11.8	0.00	-35.70	-49.17	-27.00	-22.17	-	-	30.00	390	H
			* 7.334213	-48.13	Pk	35.7	11.8	0.00	-35.60	-36.23	-	-	-21.20	-15.03	323.00	317	V
			* 7.373102	-60.18	RMS	35.7	11.8	0.00	-35.49	-48.17	-41.20	-6.97	-	-	323.00	317	V
			7.125000	-50.14	Pk	35.7	11.8	0.00	-35.70	-38.34	-	-	-7.00	-31.34	323.00	317	V
			7.125000	-61.38	RMS	35.7	11.8	0.00	-35.70	-49.58	-27.00	-22.58	-	-	323.00	317	V
EHT20 (52+26T RU72)	7095	6	* 7.290968	-47.74	Pk	35.6	11.8	0.00	-35.60	-35.94	-	-	-21.20	-14.74	343.00	172	H
			* 7.364157	-60.43	RMS	35.7	11.8	0.00	-35.40	-48.33	-41.20	-7.13	-	-	343.00	172	H
			7.125000	-50.12	Pk	35.7	11.8	0.00	-35.70	-38.32	-	-	-7.00	-31.32	343.00	172	H
			7.125000	-60.92	RMS	35.7	11.8	0.00	-35.70	-49.12	-27.00	-22.12	-	-	343.00	172	H
			* 7.411446	-48.30	Pk	35.7	11.8	0.00	-35.40	-36.20	-	-	-21.20	-15	36.00	167	V
			* 7.379713	-60.22	RMS	35.7	11.8	0.00	-35.40	-48.12	-41.20	-6.92	-	-	36.00	167	V
			7.125000	-49.86	Pk	35.7	11.8	0.00	-35.70	-38.06	-	-	-7.00	-31.06	36.00	167	V
			7.125000	-60.91	RMS	35.7	11.8	0.00	-35.70	-49.11	-27.00	-22.11	-	-	36.00	167	V
		5	* 7.370224	-48.04	Pk	35.7	11.8	0.00	-35.50	-36.04	-	-	-21.20	-14.84	39.00	330	H
			* 7.383290	-60.43	RMS	35.7	11.8	0.00	-35.30	-48.23	-41.20	-7.03	-	-	39.00	330	H
			7.125000	-50.28	Pk	35.7	11.8	0.00	-35.70	-38.48	-	-	-7.00	-31.48	39.00	330	H
			7.125000	-61.35	RMS	35.7	11.8	0.00	-35.70	-49.55	-27.00	-22.55	-	-	39.00	330	H
			* 7.387102	-48.06	Pk	35.7	11.8	0.00	-35.31	-35.87	-	-	-21.20	-14.67	3.00	210	V
			* 7.399313	-60.36	RMS	35.7	11.8	0.00	-35.36	-48.22	-41.20	-7.02	-	-	3.00	210	V
			7.125000	-49.98	Pk	35.7	11.8	0.00	-35.70	-38.18	-	-	-7.00	-31.18	3.00	210	V
			7.125000	-60.93	RMS	35.7	11.8	0.00	-35.70	-49.13	-27.00	-22.13	-	-	3.00	210	V
EHT80 (484+242T RU90)	7025	6	7.125000	-51.73	Pk	35.6	11.8	0.00	-33.86	-38.19	-	-	-7	-31.19	110	179	H
			* 7.523913	-49.76	Pk	35.7	11.8	0.00	-32.97	-35.23	-	-	-21.2	-14.03	110	179	H
			7.125000	-61.09	RMS	35.6	11.8	0.00	-33.86	-47.55	-27	-20.55	-	-	110	179	H
			* 7.498480	-61.61	RMS	35.6	11.8	0.00	-33.06	-47.27	-41.2	-6.07	-	-	110	179	H
			7.125000	-48.92	Pk	35.6	11.8	0.00	-33.86	-35.38	-	-	-7	-28.38	184	159	V
			* 7.460446	-49.25	Pk	35.7	11.8	0.00	-33.21	-34.96	-	-	-21.2	-13.76	184	159	V
			7.125000	-61.37	RMS	35.6	11.8	0.00	-33.86	-47.83	-27	-20.83	-	-	184	159	V
			* 7.497780	-61.55	RMS	35.6	11.8	0.00	-33.07	-47.22	-41.2	-6.02	-	-	184	159	V
		5	7.125000	-49.76	Pk	35.7	11.8	0.00	-36.81	-39.07	-	-	-7	-32.07	20	322	H
			7.379635	-47.16	Pk	35.8	11.8	0.00	-36.77	-36.33	-	-	-21.2	-15.13	20	322	H
			7.125000	-59.67	RMS	35.7	11.8	0.00	-36.81	-48.98	-27	-21.98	-	-	20	322	H
			7.384846	-58.91	RMS	35.8	11.8	0.00	-36.70	-48.01	-41.2	-6.81	-	-	20	322	H
			7.125000	-47.06	Pk	35.7	11.8	0.00	-36.81	-36.37	-	-	-7	-29.37	4	249	V
			7.432757	-46.66	Pk	35.8	11.8	0.00	-36.63	-35.69	-	-	-21.2	-14.49	4	249	V
			7.125000	-58.77	RMS	35.7	11.8	0.00	-36.81	-48.08	-27	-21.08	-	-	4	249	V
			7.372713	-58.87	RMS	35.8	11.8	0.00	-36.73	-48.00	-41.2	-6.80	-	-	4	249	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

STATE A (cont.)

UNII-8 (SISO)	Channel Frequency MHz	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT160 (996+484+242T RU96)	6985	6	7.125000	-49.59	Pk	35.6	11.8	0.00	-33.86	-36.05	-	-	-7	-29.05	169	163	H
			* 7.353424	-49.30	Pk	35.5	11.8	0.00	-33.54	-35.54	-	-	-21.2	-14.34	169	163	H
			7.125000	-62.01	RMS	35.6	11.8	0.00	-33.86	-48.47	-27	-21.47	-	-	169	163	H
			* 7.460291	-61.52	RMS	35.7	11.8	0.00	-33.21	-47.23	-41.2	-6.03	-	-	169	163	H
			7.125000	-43.59	Pk	35.6	11.8	0.00	-33.86	-30.05	-	-	-7	-23.05	175	189	V
			* 7.521346	-49.36	Pk	35.7	11.8	0.00	-32.98	-34.84	-	-	-21.2	-13.64	175	189	V
		5	7.125000	-59.14	RMS	35.6	11.8	0.00	-33.86	-45.60	-27	-18.60	-	-	175	189	V
			* 7.511780	-61.78	RMS	35.7	11.8	0.00	-33.01	-47.29	-41.2	-6.09	-	-	175	189	V
			7.125000	-47.66	Pk	35.7	11.8	0.00	-36.30	-36.46	-	-	-7	-29.46	352	321	H
			* 7.427157	-47.98	Pk	35.6	11.8	0.00	-36.42	-37.00	-	-	-21.2	-15.80	352	321	H
			7.125000	-60.00	RMS	35.7	11.8	0.00	-36.30	-48.80	-27	-21.80	-	-	352	321	H
			* 7.487746	-59.68	RMS	35.6	11.8	0.00	-36.30	-48.58	-41.2	-7.38	-	-	352	321	H
			7.125000	-37.72	Pk	35.7	11.8	0.00	-36.30	-26.52	-	-	-7	-19.52	323	165	V
			7.132145	-29.63	Pk	35.7	11.8	0.00	-36.40	-18.53	-	-	-7	-11.53	323	165	V
			7.125000	-53.62	RMS	35.7	11.8	0.00	-36.30	-42.42	-27	-15.42	-	-	323	165	V
			* 7.264601	-60.10	RMS	35.7	11.8	0.00	-36.20	-48.80	-41.2	-7.60	-	-	323	165	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

STATE B

UNII-8 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (26T RU8)	7095	6	7.125000	-62.85	Pk	35.7	11.8	0.00	-22.76	-38.11	-	-	-7	-31.11	176	176	H
			* 7.384768	-61.49	Pk	35.6	11.8	0.00	-22.40	-36.49	-	-	-21.2	-15.29	176	176	H
			7.125000	-73.85	RMS	35.7	11.8	0.00	-22.76	-49.11	-27	-22.11	-	-	176	176	H
			* 7.479580	-73.30	RMS	35.7	11.8	0.00	-22.16	-47.96	-41.2	-6.76	-	-	176	176	H
			7.125000	-63.69	Pk	35.7	11.8	0.00	-22.76	-38.95	-	-	-7	-31.95	268	120	V
			* 7.521346	-61.62	Pk	35.7	11.8	0.00	-22.10	-36.22	-	-	-21.2	-15.02	268	120	V
			7.125000	-73.41	RMS	35.7	11.8	0.00	-22.76	-48.67	-27	-21.67	-	-	268	120	V
			* 7.493891	-73.46	RMS	35.7	11.8	0.00	-22.14	-48.10	-41.2	-6.90	-	-	268	120	V
		5	7.125000	-48.98	Pk	35.4	11.8	0.00	-35.80	-37.58	-	-	-7	-30.58	43	386	H
			7.434313	-47.91	Pk	35.5	11.8	0.00	-35.46	-36.07	-	-	-21.2	-14.87	43	386	H
			7.125000	-61.31	RMS	35.4	11.8	0.00	-35.80	-49.91	-27	-22.91	-	-	43	386	H
			7.506958	-60.21	RMS	35.5	11.8	0.00	-35.31	-48.22	-41.2	-7.02	-	-	43	386	H
			7.125000	-50.00	Pk	35.4	11.8	0.00	-35.80	-38.60	-	-	-7	-31.60	339	208	V
			7.508202	-48.14	Pk	35.4	11.8	0.00	-35.30	-36.24	-	-	-21.2	-15.04	339	208	V
			7.125000	-60.46	RMS	35.4	11.8	0.00	-35.80	-49.06	-27	-22.06	-	-	339	208	V
			7.517769	-60.39	RMS	35.5	11.8	0.00	-35.25	-48.34	-41.2	-7.14	-	-	339	208	V
EHT20 (52+26T RU72)	7095	6	7.125000	-64.01	Pk	35.7	11.8	0.00	-22.76	-39.27	-	-	-7	-32.27	176	176	H
			* 7.500891	-61.43	Pk	35.7	11.8	0.00	-22.16	-36.09	-	-	-21.2	-14.89	176	176	H
			7.125000	-74.02	RMS	35.7	11.8	0.00	-22.76	-49.28	-27	-22.28	-	-	176	176	H
			* 7.514191	-73.53	RMS	35.7	11.8	0.00	-22.15	-48.18	-41.2	-6.98	-	-	176	176	H
			7.125000	-63.64	Pk	35.7	11.8	0.00	-22.76	-38.90	-	-	-7	-31.90	268	120	V
			* 7.513258	-61.62	Pk	35.7	11.8	0.00	-22.16	-36.28	-	-	-21.2	-15.08	268	120	V
			7.125000	-74.00	RMS	35.7	11.8	0.00	-22.76	-49.26	-27	-22.26	-	-	268	120	V
			* 7.508669	-73.34	RMS	35.7	11.8	0.00	-22.17	-48.01	-41.2	-6.81	-	-	268	120	V
		5	7.125000	-50.74	Pk	35.4	11.8	0.00	-35.80	-39.34	-	-	-7	-32.34	45	386	H
			7.453057	-48.32	Pk	35.5	11.8	0.00	-35.49	-36.51	-	-	-21.2	-15.31	45	386	H
			7.125000	-61.35	RMS	35.4	11.8	0.00	-35.80	-49.95	-27	-22.95	-	-	45	386	H
			7.429880	-60.10	RMS	35.5	11.8	0.00	-35.43	-48.23	-41.2	-7.03	-	-	45	386	H
			7.125000	-48.47	Pk	35.4	11.8	0.00	-35.80	-37.07	-	-	-7	-30.07	2	265	V
			7.459668	-48.05	Pk	35.4	11.8	0.00	-35.42	-36.27	-	-	-21.2	-15.07	2	265	V
			7.125000	-60.45	RMS	35.4	11.8	0.00	-35.80	-49.05	-27	-22.05	-	-	2	265	V
			7.385079	-60.09	RMS	35.4	11.8	0.00	-35.47	-48.36	-41.2	-7.16	-	-	2	265	V
EHT80 (48+242T RU90)	7025	6	7.125000	-50.88	Pk	35.8	11.8	0.00	-35.90	-39.18	-	-	-7.00	-32.18	332.00	164	H
			7.276268	-48.27	Pk	35.6	11.8	0.00	-35.70	-36.57	-	-	-21.20	-15.37	332.00	164	H
			7.125000	-61.39	RMS	35.8	11.8	0.00	-35.90	-49.69	-27.00	-22.69	-	-	332.00	164	H
			7.399546	-60.35	RMS	35.7	11.8	0.00	-36.00	-48.85	-41.20	-7.65	-	-	332.00	164	H
			7.125000	-50.15	Pk	35.8	11.8	0.00	-35.90	-38.45	-	-	-7	-31.45	47	134	V
			7.252546	-48.12	Pk	35.6	11.8	0.00	-35.85	-36.57	-	-	-21.2	-15.37	47	134	V
			7.125000	-60.98	RMS	35.8	11.8	0.00	-35.90	-49.28	-27	-22.28	-	-	47	134	V
			7.406857	-60.36	RMS	35.7	11.8	0.00	-35.91	-48.77	-41.2	-7.57	-	-	47	134	V
		5	7.125000	-48.81	Pk	35.7	11.8	0.00	-36.81	-38.12	-	-	-7	-31.12	39	397	H
			7.384846	-47.23	Pk	35.8	11.8	0.00	-36.70	-36.33	-	-	-21.2	-15.13	39	397	H
			7.125000	-60.16	RMS	35.7	11.8	0.00	-36.81	-49.47	-27	-22.47	-	-	39	395	H
			7.380490	-58.93	RMS	35.8	11.8	0.00	-36.76	-48.09	-41.2	-6.89	-	-	39	395	H
			7.125000	-47.48	Pk	35.7	11.8	0.00	-36.81	-36.79	-	-	-7	-29.79	9	160	V
			7.418057	-47.03	Pk	35.7	11.8	0.00	-36.60	-36.13	-	-	-21.2	-14.93	9	160	V
			7.125000	-58.53	RMS	35.7	11.8	0.00	-36.81	-47.84	-27	-20.84	-	-	9	160	V
			7.416191	-58.89	RMS	35.7	11.8	0.00	-36.62	-48.01	-41.2	-6.81	-	-	9	160	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

STATE B (cont.)

UNII-8 (SISO)	Channel Frequency MHz	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT160 (996+484+242T RU96)	6985	6	7.125000	-54.66	Pk	35.5	11.8	0.00	-24.1	-31.46	-	-	-7	-24.46	6	212	H
			* 7.520880	-61.75	Pk	35.6	11.8	0.00	-23.7	-38.05	-	-	-21.2	-16.85	6	212	H
			7.125000	-71.56	RMS	35.5	11.8	0.00	-24.1	-48.36	-27	-21.36	-	-	6	212	H
			* 7.519169	-73.49	RMS	35.6	11.8	0.00	-23.7	-49.79	-41.2	-8.59	-	-	6	212	H
			7.125000	-52.11	Pk	35.5	11.8	0.00	-24.1	-28.91	-	-	-7	-21.91	329	159	V
			7.132301	-44.15	Pk	35.5	11.8	0.00	-24.2	-21.05	-	-	-7	-14.05	329	159	V
			7.125000	-69.59	RMS	35.5	11.8	0.00	-24.1	-46.39	-27	-19.39	-	-	329	159	V
		5	* 7.397835	-73.66	RMS	35.6	11.8	0.00	-23.7	-49.96	-41.2	-8.76	-	-	329	159	V
			7.125	-60.27	Pk	35.7	11.8	0.00	-22.76	-35.53	-	-	-7	-28.53	227	266	H
			* 7.47328	-61.91	Pk	35.7	11.8	0.00	-22.12	-36.53	-	-	-21.2	-15.33	227	266	H
			7.125	-72.35	RMS	35.7	11.8	0.00	-22.76	-47.61	-27	-20.61	-	-	227	266	H
			* 7.507658	-73.33	RMS	35.7	11.8	0.00	-22.16	-47.99	-41.2	-6.79	-	-	227	266	H
			7.125	-51.06	Pk	35.7	11.8	0.00	-22.76	-26.32	-	-	-7	-19.32	188	246	V
			7.132068	-43.59	Pk	35.7	11.8	0.00	-22.76	-18.85	-	-	-7	-11.85	188	246	V
			7.125	-67.29	RMS	35.7	11.8	0.00	-22.76	-42.55	-27	-15.55	-	-	188	246	V
			* 7.521813	-73.48	RMS	35.7	11.8	0.00	-22.07	-48.05	-41.2	-6.85	-	-	188	246	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.11. 802.11a MIMO MODE IN UNII-8 BAND – BANDEDGE**STATE A**

UNII-8 (MIMO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11a	7115	6+5	7.125000	-31.60	Pk	35.7	11.8	0.00	-36.81	-20.91	-	-	-7	-13.91	46	200	H
			7.125068	-31.29	Pk	35.7	11.8	0.00	-36.81	-20.60	-	-	-7	-13.60	46	200	H
			7.125000	-47.84	RMS	35.7	11.8	0.00	-36.81	-37.15	-27	-10.15	-	-	46	200	H
			7.408724	-59.00	RMS	35.8	11.8	0.00	-36.73	-48.13	-41.2	-6.93	-	-	46	200	H
			7.125000	-23.95	Pk	35.7	11.8	0.00	-36.81	-13.26	-	-	-7	-6.26	357	233	V
			7.125068	-23.96	Pk	35.7	11.8	0.00	-36.81	-13.27	-	-	-7	-6.27	357	233	V
			7.125000	-40.53	RMS	35.7	11.8	0.00	-36.81	-29.84	-27	-2.84	-	-	357	233	V
			7.125068	-41.58	RMS	35.7	11.8	0.00	-36.81	-30.89	-27	-3.89	-	-	357	233	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

STATE B

UNII-8 (MIMO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11a	7115	6+5	7.125000	-29.83	Pk	35.7	11.8	0.00	-36.81	-19.14	-	-	-7	-12.14	258	107	H
			7.125068	-30.26	Pk	35.7	11.8	0.00	-36.81	-19.57	-	-	-7	-12.57	258	107	H
			7.125000	-45.90	RMS	35.7	11.8	0.00	-36.81	-35.21	-27	-8.21	-	-	258	107	H
			7.409968	-58.89	RMS	35.8	11.8	0.00	-36.71	-48.00	-41.2	-6.80	-	-	258	107	H
			7.125000	-23.70	Pk	35.7	11.8	0.00	-36.81	-13.01	-	-	-7	-6.01	354	173	V
			7.125068	-23.53	Pk	35.7	11.8	0.00	-36.81	-12.84	-	-	-7	-5.84	354	173	V
			7.125000	-40.48	RMS	35.7	11.8	0.00	-36.81	-29.79	-27	-2.79	-	-	354	173	V
			7.125068	-40.34	RMS	35.7	11.8	0.00	-36.81	-29.65	-27	-2.65	-	-	354	173	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.12. 802.11be MIMO SU MODE IN UNII-8 BAND – BANDEDGE**STATE A**

UNII-8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading ERP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (SU Mode)	7095	6+5	* 7.256979	-47.96	Pk	35.7	11.8	0.00	-35.90	-36.36	-	-	-21.2	-15.16	342	188	H
			* 7.282724	-60.09	RMS	35.6	11.8	0.00	-35.50	-48.19	-41.2	-6.99	-	-	342	188	H
			7.125000	-41.22	Pk	35.7	11.8	0.00	-35.70	-29.42	-	-	-7	-22.42	342	188	H
			7.125000	-56.42	RMS	35.7	11.8	0.00	-35.70	-44.62	-27	-17.62	-	-	342	188	H
			* 7.380724	-60.38	RMS	35.7	11.8	0.00	-35.33	-48.21	-41.2	-7.01	-	-	50	154	V
			7.125000	-33.84	Pk	35.7	11.8	0.00	-35.70	-22.04	-	-	-7	-15.04	50	154	V
			7.125000	-51.03	RMS	35.7	11.8	0.00	-35.70	-39.23	-27	-12.23	-	-	50	154	V
			7.125068	-32.11	Pk	35.7	11.8	0.00	-35.70	-20.31	-	-	-7	-13.31	50	154	V
			7.125000	-31.62	Pk	35.6	11.8	0.00	-35.52	-19.74	-	-	-7	-12.74	106	111	H
			7.129034	-30.12	Pk	35.6	11.8	0.00	-35.55	-18.27	-	-	-7	-11.27	106	111	H
EHT40 (SU Mode)	7085	6+5	7.125000	-46.18	RMS	35.6	11.8	0.00	-35.52	-34.30	-27	-7.30	-	-	106	111	H
			7.125068	-45.49	RMS	35.6	11.8	0.00	-35.52	-33.61	-27	-6.61	-	-	106	111	H
			7.125000	-28.79	Pk	35.6	11.8	0.00	-35.52	-16.91	-	-	-7	-9.91	190	128	V
			7.128023	-24.52	Pk	35.6	11.8	0.00	-35.58	-12.70	-	-	-7	-5.70	190	128	V
			7.125000	-42.34	RMS	35.6	11.8	0.00	-35.52	-30.46	-27	-3.46	-	-	190	128	V
			7.128334	-41.35	RMS	35.6	11.8	0.00	-35.57	-29.52	-27	-2.52	-	-	190	128	V
			7.125000	-42.62	Pk	35.8	11.8	0.00	-35.90	-30.92	-	-	-7.00	-23.92	103	101	H
			7.504158	-48.81	Pk	35.8	11.8	0.00	-35.50	-36.71	-	-	-21.20	-15.51	103	101	H
EHT80 (SU Mode)	7025	6+5	7.125000	-55.17	RMS	35.8	11.8	0.00	-35.90	-43.47	-27.00	-16.47	-	-	103	101	H
			7.522669	-60.85	RMS	35.8	11.8	0.00	-35.33	-48.58	-41.20	-7.38	-	-	103	101	H
			7.125000	-30.90	Pk	35.8	11.8	0.00	-35.90	-19.20	-	-	-7	-12.20	10	198	V
			7.125068	-29.51	Pk	35.8	11.8	0.00	-35.90	-17.81	-	-	-7	-10.81	10	198	V
			7.125000	-47.28	RMS	35.8	11.8	0.00	-35.90	-35.58	-27	-8.58	-	-	10	198	V
			7.524846	-61.00	RMS	35.8	11.8	0.00	-35.22	-48.62	-41.2	-7.42	-	-	10	198	V
			* 7.278601	-60.18	RMS	35.7	11.8	0.14	-35.54	-48.08	-41.2	-6.88	-	-	98	320	H
			7.125000	-44.67	Pk	35.7	11.8	0.00	-35.70	-32.87	-	-	-7	-25.87	98	320	H
EHT160 (SU Mode)	6985	6+5	7.125000	-57.89	RMS	35.7	11.8	0.14	-35.70	-45.95	-27	-18.95	-	-	98	320	H
			7.132379	-33.55	Pk	35.7	11.8	0.00	-35.76	-21.81	-	-	-7	-14.81	98	320	H
			7.125000	-36.71	Pk	35.7	11.8	0.00	-35.70	-24.91	-	-	-7	-17.91	49	127	V
			7.125000	-49.16	RMS	35.7	11.8	0.14	-35.70	-37.22	-27	-10.22	-	-	49	127	V
			7.128101	-42.15	RMS	35.7	11.8	0.14	-35.61	-30.12	-27	-3.12	-	-	49	127	V
			7.132456	-26.90	Pk	35.7	11.8	0.00	-35.75	-15.15	-	-	-7	-8.15	49	127	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

STATE B

UNII-8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading ERP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (SU Mode)	7095	6+5	7.125000	-37.88	Pk	35.7	11.8	0.00	-36.81	-27.19	-	-	-7	-20.19	274	108	H
			7.381502	-46.70	Pk	35.8	11.8	0.00	-36.73	-35.83	-	-	-21.2	-14.63	274	108	H
			7.125000	-54.46	RMS	35.7	11.8	0.00	-36.81	-43.77	-27	-16.77	-	-	274	108	H
			7.407946	-58.93	RMS	35.8	11.8	0.00	-36.72	-48.05	-41.2	-6.85	-	-	274	108	H
			7.125000	-31.23	Pk	35.7	11.8	0.00	-36.81	-20.54	-	-	-7	-13.54	6	193	V
			7.125223	-28.23	Pk	35.7	11.8	0.00	-36.81	-17.54	-	-	-7	-10.54	6	193	V
			7.125000	-49.78	RMS	35.7	11.8	0.00	-36.81	-39.09	-27	-12.09	-	-	6	193	V
			7.412224	-58.75	RMS	35.8	11.8	0.00	-36.66	-47.81	-41.2	-6.61	-	-	6	193	V
EHT40 (SU Mode)	7085	6+5	7.125000	-31.29	Pk	35.6	11.8	0.00	-35.52	-19.41	-	-	-7.00	-12.41	280.00	109	H
			7.125223	-30.25	Pk	35.6	11.8	0.00	-35.52	-18.37	-	-	-7.00	-11.37	280.00	109	H
			7.125000	-45.27	RMS	35.6	11.8	0.00	-35.52	-33.39	-27.00	-6.39	-	-	280.00	109	H
			7.125068	-45.17	RMS	35.6	11.8	0.00	-35.52	-33.29	-27.00	-6.29	-	-	280.00	109	H
			7.125000	-30.17	Pk	35.6	11.8	0.00	-35.52	-18.29	-	-	-7	-11.29	357	173	V
			7.127168	-24.03	Pk	35.6	11.8	0.00	-35.54	-12.17	-	-	-7	-5.17	357	173	V
			7.125000	-43.81	RMS	35.6	11.8	0.00	-35.52	-31.93	-27	-4.93	-	-	357	173	V
			7.128101	-41.88	RMS	35.6	11.8	0.00	-35.58	-30.06	-27	-3.06	-	-	357	173	V
EHT80 (SU Mode)	7025	6+5	7.125000	-41.13	Pk	35.6	11.8	0.00	-33.86	-27.59	-	-	-7	-20.59	47	211	H
			* 7.391691	-49.39	Pk	35.6	11.8	0.00	-33.47	-35.46	-	-	-21.2	-14.26	47	211	H
			7.125000	-53.49	RMS	35.6	11.8	0.00	-33.86	-39.95	-27	-12.95	-	-	47	211	H
			* 7.520880	-61.67	RMS	35.7	11.8	0.00	-32.98	-47.15	-41.2	-5.95	-	-	47	211	H
			7.125000	-34.00	Pk	35.6	11.8	0.00	-33.86	-20.46	-	-	-7	-13.46	4	146	V
			7.129034	-32.72	Pk	35.6	11.8	0.00	-33.85	-19.17	-	-	-7	-12.17	4	146	V
			7.125000	-47.82	RMS	35.6	11.8	0.00	-33.86	-34.28	-27	-7.28	-	-	4	146	V
			* 7.484635	-61.62	RMS	35.6	11.8	0.00	-33.12	-47.34	-41.2	-6.14	-	-	4	146	V
EHT160 (SU Mode)	6985	6+5	* 7.279146	-60.06	RMS	35.7	11.8	0.14	-35.50	-47.92	-41.2	-6.72	-	-	88	167	H
			7.125000	-38.10	Pk	35.7	11.8	0.00	-35.70	-26.30	-	-	-7	-19.30	88	167	H
			7.125000	-51.54	RMS	35.7	11.8	0.14	-35.70	-39.60	-27	-12.60	-	-	88	167	H
			7.133390	-32.78	Pk	35.7	11.8	0.00	-35.70	-20.98	-	-	-7	-13.98	88	167	H
			7.125000	-30.83	Pk	35.7	11.8	0.00	-35.70	-19.03	-	-	-7	-12.03	56	213	V
			7.125000	-44.97	RMS	35.7	11.8	0.14	-35.70	-33.03	-27	-6.03	-	-	56	213	V
			7.128723	-42.07	RMS	35.8	11.8	0.14	-35.67	-30.00	-27	-3.00	-	-	56	213	V
			7.133701	-27.44	Pk	35.8	11.8	0.00	-35.70	-15.54	-	-	-7	-8.54	56	213	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.1.13. 802.11be MIMO PARTIAL RU MODE IN UNII-8 BAND – BANDEDGE

STATE A

UNII-8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (26T RU8)	7095	6+5	7.125000	-52.01	Pk	35.6	11.8	0.00	-33.85	-38.46	-	-	-7	-31.46	332	109	H
			7.375690	-48.45	Pk	35.6	11.8	0.00	-33.92	-34.97	-	-	-21.2	-13.77	332	109	H
			7.125000	-62.67	RMS	35.6	11.8	0.00	-33.85	-49.12	-27	-22.12	-	-	332	109	H
			7.509213	-61.07	RMS	35.6	11.8	0.00	-33.71	-47.38	-41.2	-6.18	-	-	332	109	H
			7.125000	-50.11	Pk	35.6	11.8	0.00	-33.85	-36.56	-	-	-7	-29.56	53	144	V
			7.518935	-49.23	Pk	35.6	11.8	0.00	-33.78	-35.61	-	-	-21.2	-14.41	53	144	V
			7.125000	-61.61	RMS	35.6	11.8	0.00	-33.85	-48.06	-27	-21.06	-	-	53	144	V
EHT20 (52+26T RU72)	7095	6+5	7.509758	-61.09	RMS	35.6	11.8	0.00	-33.71	-47.40	-41.2	-6.20	-	-	53	144	V
			7.125000	-51.47	Pk	35.6	11.8	0.00	-33.85	-37.92	-	-	-7	-30.92	333	110	H
			7.435168	-49.20	Pk	35.6	11.8	0.00	-33.81	-35.61	-	-	-21.2	-14.41	333	110	H
			7.125000	-62.17	RMS	35.6	11.8	0.00	-33.85	-48.62	-27	-21.62	-	-	333	110	H
			7.515813	-61.02	RMS	35.6	11.8	0.00	-33.73	-47.35	-41.2	-6.15	-	-	333	110	H
			7.125000	-50.07	Pk	35.6	11.8	0.00	-33.85	-36.52	-	-	-7	-29.52	53	144	V
			7.509524	-49.43	Pk	35.6	11.8	0.00	-33.71	-35.74	-	-	-21.2	-14.54	53	144	V
EHT80 (484+242T RU90)	7025	6+5	7.125000	-61.85	RMS	35.6	11.8	0.00	-33.85	-48.30	-27	-21.30	-	-	53	144	V
			7.516680	-60.87	RMS	35.6	11.8	0.00	-33.74	-47.21	-41.2	-6.01	-	-	53	144	V
			7.125000	-48.53	Pk	35.8	11.8	0.00	-35.90	-36.83	-	-	-7	-29.83	103	102	H
			7.275335	-47.84	Pk	35.6	11.8	0.00	-35.77	-36.21	-	-	-21.2	-15.01	103	102	H
			7.125000	-60.76	RMS	35.8	11.8	0.00	-35.90	-49.06	-27	-22.06	-	-	103	102	H
			7.366646	-60.35	RMS	35.7	11.8	0.00	-35.76	-48.61	-41.2	-7.41	-	-	103	102	H
			7.125000	-38.77	Pk	35.8	11.8	0.00	-35.90	-27.07	-	-	-7	-20.07	9	198	V
EHT160 (996+484+242T RU96)	6985	6+5	7.259312	-47.95	Pk	35.6	11.8	0.00	-35.87	-36.42	-	-	-21.2	-15.22	9	198	V
			7.125000	-57.62	RMS	35.8	11.8	0.00	-35.90	-45.92	-27	-18.92	-	-	9	198	V
			7.504158	-60.44	RMS	35.8	11.8	0.00	-35.50	-48.34	-41.2	-7.14	-	-	9	198	V
			7.125000	-49.08	Pk	35.7	11.8	0.00	-22.76	-24.34	-	-	-7	-17.34	236	204	V
			7.129579	-41.82	Pk	35.7	11.8	0.00	-22.83	-17.15	-	-	-7	-10.15	236	204	V
			7.125000	-65.32	RMS	35.7	11.8	0.00	-22.76	-40.58	-27	-13.58	-	-	236	204	V
			* 7.512013	-73.27	RMS	35.7	11.8	0.00	-22.07	-47.84	-41.2	-6.64	-	-	236	204	V
			7.125000	-61.58	Pk	35.7	11.8	0.00	-22.76	-36.84	-	-	-7	-29.84	274	387	H
			7.132223	-46.40	Pk	35.7	11.8	0.00	-22.77	-21.67	-	-	-7	-14.67	274	387	H
			7.125	-73.14	RMS	35.7	11.8	0.00	-22.76	-48.4	-27	-21.4	-	-	274	387	H
			* 7.504158	-73.39	RMS	35.7	11.8	0.00	-22.19	-48.08	-41.2	-6.88	-	-	274	387	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

STATE B

UNII-8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (26T RU8)	7095	6+5	7.125	-61.66	Pk	35.7	11.8	0.00	-22.76	-36.92	-	-	-7	-29.92	89	381	H
			* 7.439602	-61.73	Pk	35.7	11.8	0.00	-22.13	-36.36	-	-	-21.2	-15.16	89	381	H
			7.125	-73.94	RMS	35.7	11.8	0.00	-22.76	-49.2	-27	-22.2	-	-	89	381	H
			* 7.524924	-73.52	RMS	35.7	11.8	0.00	-22.14	-48.16	-41.2	-6.96	-	-	89	381	H
			7.125	-62.92	Pk	35.7	11.8	0.00	-22.76	-38.18	-	-	-7	-31.18	230	362	V
			* 7.512091	-61.45	Pk	35.7	11.8	0.00	-22.08	-36.03	-	-	-21.2	-14.83	230	362	V
			7.125	-73.51	RMS	35.7	11.8	0.00	-22.76	-48.77	-27	-21.77	-	-	230	362	V
			* 7.500035	-73.49	RMS	35.7	11.8	0.00	-22.12	-48.11	-41.2	-6.91	-	-	230	362	V
			7.125000	-62.81	Pk	35.7	11.8	0.00	-22.76	-38.07	-	-	-7	-31.07	89	381	H
			* 7.440302	-61.57	Pk	35.7	11.8	0.00	-22.15	-36.22	-	-	-21.2	-15.02	89	381	H
EHT20 (52+26T RU72)	7095	6+5	7.125000	-74.05	RMS	35.7	11.8	0.00	-22.76	-49.31	-27	-22.31	-	-	89	381	H
			* 7.504313	-73.41	RMS	35.7	11.8	0.00	-22.18	-48.09	-41.2	-6.89	-	-	89	381	H
			7.125000	-62.95	Pk	35.7	11.8	0.00	-22.76	-38.21	-	-	-7	-31.21	230	362	V
			* 7.397213	-61.37	Pk	35.6	11.8	0.00	-22.30	-36.27	-	-	-21.2	-15.07	230	362	V
			7.125000	-73.45	RMS	35.7	11.8	0.00	-22.76	-48.71	-27	-21.71	-	-	230	362	V
			* 7.494669	-73.42	RMS	35.7	11.8	0.00	-22.11	-48.03	-41.2	-6.83	-	-	230	362	V
			7.125	-51.92	Pk	35.6	11.8	0.00	-33.86	-38.38	-	-	-7	-31.38	276	121	H
			* 7.414013	-49.36	Pk	35.6	11.8	0.00	-33.39	-35.35	-	-	-21.2	-14.15	276	121	H
			7.125	-62.06	RMS	35.6	11.8	0.00	-33.86	-48.52	-27	-21.52	-	-	276	121	H
			* 7.463246	-61.72	RMS	35.7	11.8	0.00	-33.20	-47.42	-41.2	-6.22	-	-	276	121	H
EHT80 (484+242T RU90)	7025	6+5	7.125	-49.82	Pk	35.6	11.8	0.00	-33.86	-36.28	-	-	-7	-29.28	13	166	V
			* 7.493191	-49.26	Pk	35.6	11.8	0.00	-33.08	-34.94	-	-	-21.2	-13.74	13	166	V
			7.125	-61.92	RMS	35.6	11.8	0.00	-33.86	-48.38	-27	-21.38	-	-	13	166	V
			* 7.514735	-61.62	RMS	35.7	11.8	0.00	-33	-47.12	-41.2	-5.92	-	-	13	166	V
			7.125000	-43.75	Pk	35.4	11.8	0.00	-35.80	-32.35	-	-	-7	-25.35	39	275	H
			7.397679	-47.96	Pk	35.4	11.8	0.00	-35.40	-36.16	-	-	-21.2	-14.96	39	275	H
			7.125000	-58.93	RMS	35.4	11.8	0.00	-35.80	-47.53	-27	-20.53	-	-	39	275	H
			7.517302	-60.49	RMS	35.5	11.8	0.00	-35.25	-48.44	-41.2	-7.24	-	-	39	275	H
			7.125000	-36.65	Pk	35.4	11.8	0.00	-35.80	-25.25	-	-	-7	-18.25	358	162	V
			7.129501	-26.71	Pk	35.4	11.8	0.00	-35.77	-15.28	-	-	-7	-8.28	358	162	V
EHT160 (996+484+2 42T RU96)	6985	6+5	7.125000	-51.08	RMS	35.4	11.8	0.00	-35.80	-39.68	-27	-12.68	-	-	358	162	V
			7.401413	-60.22	RMS	35.4	11.8	0.00	-35.38	-48.40	-41.2	-7.20	-	-	358	162	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector


RMS - RMS detection

WORST-CASE BANDEDGE (HIGH CHANNEL)

STATE A

802.11be EHT40 / 227 & 7085MHz / 2TX CDD / SU:

VERTICAL RESULT

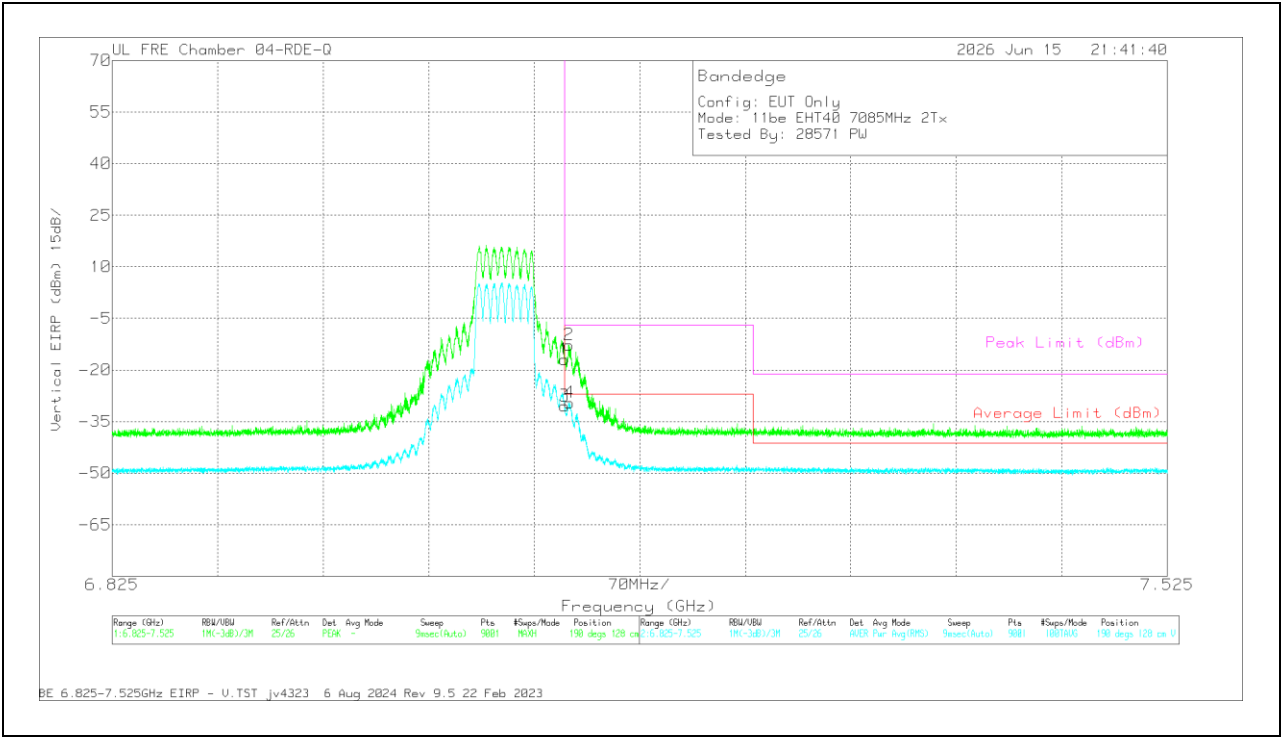


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	222741 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.125	-28.79	Pk	35.6	11.8	0	-35.52	-16.91	-	-	-7	-9.91	190	128	V
2	7.128023	-24.52	Pk	35.6	11.8	0	-35.58	-12.7	-	-	-7	-5.7	190	128	V
3	7.125	-42.34	RMS	35.6	11.8	0	-35.52	-30.46	-27	-3.46	-	-	190	128	V
4	7.128334	-41.35	RMS	35.6	11.8	0	-35.57	-29.52	-27	-2.52	-	-	190	128	V

STATE B

802.11a / 233 & 7115MHz / 2TX:

VERTICAL RESULT

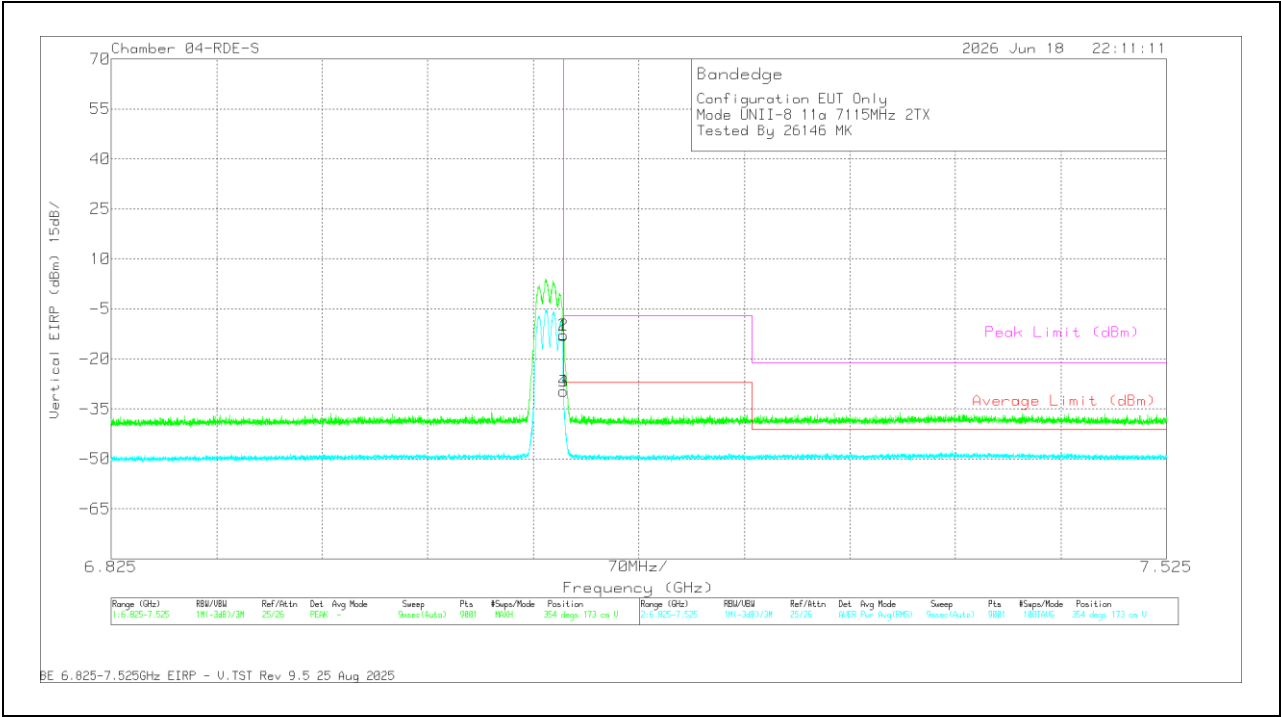

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206805 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.125	-23.7	Pk	35.7	11.8	0	-36.81	-13.01	-	-	-7	-6.01	354	173	V
2	7.125068	-23.53	Pk	35.7	11.8	0	-36.81	-12.84	-	-	-7	-5.84	354	173	V
3	7.125	-40.48	RMS	35.7	11.8	0	-36.81	-29.79	-27	-2.79	-	-	354	173	V
4	7.125068	-40.34	RMS	35.7	11.8	0	-36.81	-29.65	-27	-2.65	-	-	354	173	V

1.1.14. 802.11a MIMO MODE IN UNII-8 BAND – SPURIOUS EMISSIONS**STATE A 20MHz**

UNII-8 (MIMO CDD)	Channel Frequency MHz	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbt/ Filt/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11a	7115	6+5	* 1.560625	46.06	ADR	27.8	0.00	-47.34	26.52	54	-27.48	-	-	360	200	V
			* 1.561367	58.06	PK-U	27.8	0.00	-47.34	38.52	-	-	74	-35.48	360	200	V
			* 1.567364	46.13	ADR	27.8	0.00	-47.32	26.61	54	-27.39	-	-	360	101	H
			* 1.572963	57.69	PK-U	27.8	0.00	-47.31	38.18	-	-	74	-35.82	360	101	H
			3.076891	44.22	ADR	33.0	0.00	-45.49	31.73	68.2	-36.47	-	-	271	200	V
			3.083154	55.61	PK-U	33.0	0.00	-45.52	43.09	-	-	88.2	-45.11	360	200	H
			3.084020	44.18	ADR	33.0	0.00	-45.51	31.67	68.2	-36.53	-	-	360	200	H
			* 3.087912	55.94	PK-U	33.0	0.00	-45.49	43.45	-	-	88.2	-44.75	271	200	V
			* 12.191450	53.74	PK-U	38.9	0.00	-41.66	50.98	-	-	74	-23.02	271	200	H
			* 12.194510	41.83	ADR	38.9	0.00	-41.65	39.08	54	-14.92	-	-	271	200	H
			* 12.200997	53.95	PK-U	38.9	0.00	-41.67	51.18	-	-	74	-22.82	271	101	V
			* 12.210465	42.10	ADR	38.9	0.00	-41.71	39.29	54	-14.71	-	-	271	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

STATE B 20MHz

UNII-8 (MIMO CDD)	Channel Frequency MHz	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbt/ Filt/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11a	7115	6+5	*1.510074	47.29	ADR	27.8	0.00	-47.36	27.73	54	-26.27	-	-	360	199	H
			*1.51321	59.06	PK-U	27.8	0.00	-47.35	39.51	-	-	74	-34.49	360	101	V
			*1.513376	59.30	PK-U	27.8	0.00	-47.34	39.76	-	-	74	-34.24	360	199	H
			*1.513797	47.28	ADR	27.8	0.00	-47.33	27.75	54	-26.25	-	-	360	101	V
			*2.740385	57.31	PK-U	32.4	0.00	-46.52	43.19	-	-	74	-30.81	360	101	V
			*2.750357	45.62	ADR	32.4	0.00	-46.51	31.51	54	-22.49	-	-	360	101	H
			*2.752263	45.58	ADR	32.4	0.00	-46.52	31.46	54	-22.54	-	-	360	101	V
			*2.75297	57.05	PK-U	32.4	0.00	-46.51	42.94	-	-	74	-31.06	360	101	H
			*11.114993	55.89	PK-U	37.8	0.00	-43.06	50.63	-	-	74	-23.37	360	101	V
			*11.12352	43.05	ADR	37.8	0.00	-43.10	37.75	54	-16.25	-	-	360	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.1.15. 802.11be MIMO MODE IN UNII-8 BAND – SPURIOUS EMISSIONS**STATE A 20MHz**

UNII-8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbl/Fitr /Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity	
EHT20 (SU Mode)	6895	6+5	* 2.245647	49.70	ADR	31.5	0.00	-49.96	31.24	54	-22.76	-	-	0	101	H	
			* 2.248587	61.37	PK-U	31.5	0.00	-50.18	42.69	-	-	74	-31.31	0	101	V	
			* 2.250689	49.76	ADR	31.5	0.00	-50.04	31.22	54	-22.78	-	-	0	101	V	
			* 2.265551	61.51	PK-U	31.5	0.00	-49.83	43.18	-	-	74	-30.82	0	101	H	
			* 4.000105	59.10	PK-U	33.5	0.00	-47.90	44.70	-	-	74	-29.3	0	101	H	
			* 4.001514	47.29	ADR	33.5	0.00	-47.75	33.04	54	-20.96	-	-	0	101	H	
			* 4.006092	47.27	ADR	33.5	0.00	-47.88	32.89	54	-21.11	-	-	0	101	V	
			* 4.013224	59.35	PK-U	33.5	0.00	-47.84	45.01	-	-	74	-28.99	0	101	V	
			* 11.093282	58.36	PK-U	37.9	0.00	-44.42	51.84	-	-	74	-22.16	0	101	H	
			* 11.098798	46.22	ADR	37.9	0.00	-44.40	39.72	54	-14.28	-	-	0	101	V	
			* 11.108273	46.45	ADR	37.9	0.00	-44.25	40.10	54	-13.9	-	-	0	101	H	
			* 11.129835	58.54	PK-U	37.9	0.00	-44.53	51.91	-	-	74	-22.09	0	101	V	
	6995		* 2.243337	61.39	PK-U	31.5	0.00	-49.87	43.02	-	-	74	-30.98	0	101	H	
			* 2.244449	49.65	ADR	31.5	0.00	-49.84	31.31	54	-22.69	-	-	0	101	V	
			* 2.248372	49.83	ADR	31.5	0.00	-50.23	31.10	54	-22.9	-	-	0	101	H	
			* 2.251510	61.31	PK-U	31.5	0.00	-50.10	42.71	-	-	74	-31.29	0	101	V	
			* 3.995295	58.93	PK-U	33.5	0.00	-48.35	44.08	-	-	74	-29.92	0	101	V	
			* 3.998224	58.92	PK-U	33.5	0.00	-48.09	44.33	-	-	74	-29.67	0	101	H	
			* 4.004410	47.26	ADR	33.5	0.00	-47.78	32.98	54	-21.02	-	-	0	101	H	
			* 4.009458	47.24	ADR	33.5	0.00	-48.00	32.74	54	-21.26	-	-	0	101	V	
			* 11.055420	59.25	PK-U	37.8	0.00	-44.94	52.11	-	-	74	-21.89	0	101	V	
			* 11.058044	46.68	ADR	37.8	0.00	-45.09	39.39	54	-14.61	-	-	0	101	H	
			* 11.060192	46.65	ADR	37.8	0.00	-44.92	39.53	54	-14.47	-	-	0	101	V	
			* 11.070934	58.46	PK-U	37.9	0.00	-44.61	51.75	-	-	74	-22.25	0	101	H	
	7095		* 2.239418	61.44	PK-U	31.5	0.00	-50.04	42.90	-	-	74	-31.1	0	101	V	
			* 2.251928	61.57	PK-U	31.5	0.00	-50.10	42.97	-	-	74	-31.03	0	101	H	
			* 2.257269	49.68	ADR	31.5	0.00	-50.07	31.11	54	-22.89	-	-	0	101	H	
			* 2.261238	49.60	ADR	31.5	0.00	-50.02	31.08	54	-22.92	-	-	0	101	V	
			* 4.009451	47.11	ADR	33.5	0.00	-48.00	32.61	54	-21.39	-	-	0	101	V	
			* 4.011476	47.08	ADR	33.5	0.00	-48.00	32.58	54	-21.42	-	-	0	101	H	
			* 4.014707	58.91	PK-U	33.5	0.00	-48.00	44.41	-	-	74	-29.59	0	101	H	
			* 4.027769	58.31	PK-U	33.5	0.00	-47.92	43.89	-	-	74	-30.11	0	101	V	
			* 11.090738	46.33	ADR	37.9	0.00	-44.25	39.98	54	-14.02	-	-	0	101	V	
			* 11.093094	58.36	PK-U	37.9	0.00	-44.47	51.79	-	-	74	-22.21	0	101	V	
			* 11.102529	46.29	ADR	37.9	0.00	-44.45	39.74	54	-14.26	-	-	0	101	H	
			* 11.104473	57.85	PK-U	37.9	0.00	-44.35	51.40	-	-	74	-22.6	0	101	H	
	EHT20 (26T RU0)		6895	* 4.016857	57.33	PK-U	33.5	0.00	-47.36	43.47	-	-	74	-30.53	360	101	H
				* 4.019697	45.93	ADR	33.5	0.00	-47.45	31.98	54	-22.02	-	-	360	101	H
				* 4.007272	57.60	PK-U	33.4	0.00	-47.44	43.56	-	-	74	-30.44	360	101	V
				* 4.011480	45.84	ADR	33.4	0.00	-47.28	31.96	54	-22.04	-	-	360	101	V
				* 11.478021	54.94	PK-U	38.1	0.00	-44.03	49.01	-	-	74	-24.99	360	101	H
				* 11.480693	43.32	ADR	38.1	0.00	-44.06	37.36	54	-16.64	-	-	360	101	H
				* 15.693455	53.82	PK-U	41.2	0.00	-42.28	52.74	-	-	74	-21.26	360	101	H
				* 15.696666	42.27	ADR	41.2	0.00	-42.20	41.27	54	-12.73	-	-	360	101	H
				* 11.478605	55.20	PK-U	38.1	0.00	-44.04	49.26	-	-	74	-24.74	360	101	V
				* 11.480313	43.37	ADR	38.1	0.00	-44.06	37.41	54	-16.59	-	-	360	101	V
				* 15.683308	53.51	PK-U	41.2	0.00	-42.29	52.42	-	-	74	-21.58	360	101	V
				* 15.691439	42.32	ADR	41.2	0.00	-42.24	41.28	54	-12.72	-	-	360	101	V
EHT20 (26T RU4)	6995	2.050614	61.73	PK-U	32.0	0.00	-48.90	44.83	-	-	88.2	-43.37	1	101	H		
		2.052019	49.28	ADR	32.0	0.00	-48.90	32.38	68.2	-35.82	-	-	1	101	H		
		2.055292	61.20	PK-U	32.0	0.00	-48.90	44.30	-	-	88.2	-43.9	1	200	V		
		2.053901	49.33	ADR	32.0	0.00	-48.89	32.44	68.2	-35.76	-	-	1	200	V		
		9.936427	56.42	PK-U	37.2	0.00	-44.96	48.66	-	-	88.2	-39.54	1	200	H		
		9.942435	44.74	ADR	37.3	0.00	-45.20	36.84	68.2	-31.36	-	-	1	200	H		
		16.921182	54.39	PK-U	41.2	0.00	-41.10	54.49	-	-	88.2	-33.71	1	200	H		
		16.938028	42.57	ADR	41.2	0.00	-41.10	42.67	68.2	-25.53	-	-	1	200	H		
		9.937583	56.43	PK-U	37.2	0.00	-44.96	48.67	-	-	88.2	-39.53	1	200	V		
		9.925372	44.73	ADR	37.2	0.00	-45.00	36.93	68.2	-31.27	-	-	1	200	V		
		16.936632	54.65	PK-U	41.2	0.00	-41.10	54.75	-	-	88.2	-33.45	1	101	V		
		16.919654	42.70	ADR	41.2	0.00	-41.07	42.83	68.2	-25.37	-	-	1	101	V		
EHT20 (26T RU8)	7095	2.552413	60.89	PK-U	32.4	0.00	-48.70	44.59	-	-	88.2	-43.61	0	200	H		
		2.551982	48.91	ADR	32.4	0.00	-48.70	32.61	68.2	-35.59	-	-	0	200	H		
		2.549520	60.66	PK-U	32.4	0.00	-48.75	44.31	-	-	88.2	-43.89	0	101	V		
		2.552764	48.89	ADR	32.4	0.00	-48.70	32.59	68.2	-35.61	-	-	0	101	V		
		9.993321	56.42	PK-U	37.4	0.00	-45.20	48.62	-	-	88.2	-39.58	0	101	H		
		9.999356	44.38	ADR	37.4	0.00	-45.24	36.54	68.2	-31.66	-	-	0	101	H		
		17.325342	54.29	PK-U	41.4	0.00	-39.80	55.89	-	-	88.2	-32.31	0	101	H		
		17.335069	42.68	ADR	41.3	0.00	-40.00	43.98	68.2	-24.22	-	-	0	101	H		
		9.987274	56.89	PK-U	37.3	0.00	-45.30	48.89	-	-	88.2	-39.31	0	101	V		
		9.988649	44.45	ADR	37.3	0.00	-45.30	36.45	68.2	-31.75	-	-	0	101	V		
		17.337765	54.60	PK-U	41.3	0.00	-40.00	55.90	-	-	88.2	-32.3	0	101	V		
		17.335425	42.50	ADR	41.3	0.00	-40.00	43.80	68.2	-24.4	-	-	0	101	V		

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

STATE A 20MHz Cont.

UNII-8 (MIMO CDD)	Channel Frequency MHz	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbt/FI tr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (52+26T RU70)	6895	6+5	* 4.020127	55.70	PK-U	33.5	0.00	-45.34	43.86	-	-	74	-30.14	0	101	H
			* 4.033059	43.85	ADR	33.5	0.00	-45.38	31.97	54	-22.03	-	-	0	101	H
			* 4.024505	55.65	PK-U	33.5	0.00	-45.36	43.79	-	-	74	-30.21	0	101	V
			* 4.026256	43.72	ADR	33.5	0.00	-45.36	31.86	54	-22.14	-	-	0	101	V
			* 11.782119	53.22	PK-U	38.8	0.00	-41.71	50.31	-	-	74	-23.69	0	199	H
			* 11.778519	41.74	ADR	38.7	0.00	-41.72	38.72	54	-15.28	-	-	0	199	H
			* 11.798913	53.99	PK-U	38.8	0.00	-41.66	51.13	-	-	74	-22.87	0	101	V
			* 11.780819	42.00	ADR	38.8	0.00	-41.72	39.08	54	-14.92	-	-	0	101	V
			1.968589	57.77	PK-U	31.3	0.00	-46.51	42.56	-	-	88.2	-45.64	0	101	V
			1.970455	46.33	ADR	31.3	0.00	-46.52	31.11	68.2	-37.09	-	-	0	101	V
			1.973076	46.16	ADR	31.4	0.00	-46.52	31.04	68.2	-37.16	-	-	0	200	H
			1.977169	57.67	PK-U	31.4	0.00	-46.52	42.55	-	-	88.2	-45.65	0	200	H
EHT20 (52+26T RU71)	6995	6+5	* 11.632999	52.75	PK-U	38.5	0.00	-41.71	49.54	-	-	74	-24.46	0	200	H
			* 11.635646	41.11	ADR	38.5	0.00	-41.71	37.90	54	-16.1	-	-	0	200	H
			* 15.690059	54.53	PK-U	40.4	0.00	-42.36	52.57	-	-	74	-21.43	0	200	H
			* 15.697043	42.95	ADR	40.4	0.00	-42.30	41.05	54	-12.95	-	-	0	200	H
			* 11.633114	53.53	PK-U	38.5	0.00	-41.71	50.32	-	-	74	-23.68	0	101	V
			* 11.623479	41.09	ADR	38.5	0.00	-41.62	37.97	54	-16.03	-	-	0	101	V
			* 15.691879	54.34	PK-U	40.4	0.00	-42.35	52.39	-	-	74	-21.61	0	101	V
			* 15.685496	42.93	ADR	40.4	0.00	-42.40	40.93	54	-13.07	-	-	0	101	V
			3.384499	43.34	ADR	32.7	0.00	-44.81	31.23	68.2	-36.97	-	-	0	101	H
			3.384806	55.13	PK-U	32.7	0.00	-44.81	43.02	-	-	88.2	-45.18	0	101	H
			3.389309	54.97	PK-U	32.6	0.00	-44.82	42.75	-	-	88.2	-45.45	0	101	V
			3.416359	42.94	ADR	32.6	0.00	-44.85	30.69	68.2	-37.51	-	-	0	101	V
EHT20 (52+26T RU72)	7095	6+5	* 3.564374	58.77	PK-U	33.2	0.00	-47.10	44.87	-	-	88.2	-43.33	360	101	H
			* 3.565925	47.38	ADR	33.2	0.00	-47.10	33.48	68.2	-34.72	-	-	360	101	H
			* 2.381799	61.85	PK-U	32.3	0.00	-49.00	45.15	-	-	74	-28.85	360	101	H
			* 2.382653	50.70	ADR	32.3	0.00	-49.00	34.00	54	-20	-	-	360	101	H
			* 3.563107	58.47	PK-U	33.2	0.00	-47.10	44.57	-	-	88.2	-43.63	360	101	V
			* 3.564725	47.38	ADR	33.2	0.00	-47.10	33.48	68.2	-34.72	-	-	360	101	V
			* 2.378493	62.15	PK-U	32.2	0.00	-49.00	45.35	-	-	74	-28.65	360	101	V
			* 2.382808	50.52	ADR	32.3	0.00	-49.00	33.82	54	-20.18	-	-	360	101	V
			14.170328	54.85	PK-U	39.1	0.00	-42.70	51.25	-	-	88.2	-36.95	360	101	H
			14.170392	43.12	ADR	39.1	0.00	-42.70	39.52	68.2	-28.68	-	-	360	101	H
			14.182131	54.52	PK-U	39.1	0.00	-42.79	50.83	-	-	88.2	-37.37	360	101	V
			14.174744	43.00	ADR	39.1	0.00	-42.70	39.40	68.2	-28.8	-	-	360	101	V

STATE B 20MHz

UNII-8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbl/ Ftr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	6895	6+5	*2.235453	61.14	PK-U	31.5	0.00	-50.12	42.52	-	-	74	-31.48	0	101	H
			*2.242185	49.71	ADR	31.5	0.00	-49.74	31.47	54	-22.53	-	-	0	101	H
			*3.889294	58.61	PK-U	33.5	0.00	-47.48	44.63	-	-	74	-29.37	0	101	V
			*3.891572	58.15	PK-U	33.5	0.00	-47.34	44.31	-	-	74	-29.69	0	101	H
			*3.89402	46.16	ADR	33.5	0.00	-47.30	32.36	54	-21.64	-	-	0	101	H
			*3.904017	46.20	ADR	33.5	0.00	-47.51	32.19	54	-21.81	-	-	0	101	V
			*11.080851	58.21	PK-U	37.9	0.00	-44.39	51.72	-	-	74	-22.28	0	101	V
			*11.084914	46.43	ADR	37.9	0.00	-44.57	39.76	54	-14.24	-	-	0	101	V
			*11.085374	58.04	PK-U	37.9	0.00	-44.53	51.41	-	-	74	-22.59	0	101	H
			*11.087542	46.53	ADR	37.9	0.00	-44.44	39.99	54	-14.01	-	-	0	101	H
			*2.243407	61.58	PK-U	31.5	0.00	-49.86	43.22	-	-	74	-30.78	0	101	V
			*2.24554	49.73	ADR	31.5	0.00	-49.95	31.28	54	-22.72	-	-	0	101	V
	6995	6+5	*2.248266	61.78	PK-U	31.5	0.00	-50.25	43.03	-	-	74	-30.97	0	101	H
			*2.250608	49.60	ADR	31.5	0.00	-50.02	31.08	54	-22.92	-	-	0	101	H
			*3.628168	58.47	PK-U	33.5	0.00	-48.37	43.60	-	-	74	-30.4	0	101	V
			*3.647953	58.29	PK-U	33.6	0.00	-47.70	44.19	-	-	74	-29.81	0	101	H
			*3.648544	46.70	ADR	33.6	0.00	-47.92	32.38	54	-21.62	-	-	0	101	H
			*3.655209	46.61	ADR	33.5	0.00	-47.78	32.33	54	-21.67	-	-	0	101	V
			*11.047068	46.82	ADR	37.8	0.00	-45.29	39.33	54	-14.67	-	-	0	101	V
			*11.047248	46.76	ADR	37.8	0.00	-45.25	39.31	54	-14.69	-	-	0	101	H
			*11.049352	58.87	PK-U	37.8	0.00	-45.14	51.53	-	-	74	-22.47	0	101	H
			*11.057631	59.42	PK-U	37.8	0.00	-45.10	52.12	-	-	74	-21.88	0	101	V
			*2.250597	49.64	ADR	31.5	0.00	-50.02	31.12	54	-22.88	-	-	0	101	V
			*2.251587	49.58	ADR	31.5	0.00	-50.10	30.98	54	-23.02	-	-	0	101	H
EHT20 (26T RU0)	6895	6+5	*2.256103	61.61	PK-U	31.5	0.00	-50.28	42.83	-	-	74	-31.17	0	101	V
			*2.275157	61.22	PK-U	31.6	0.00	-50.35	42.47	-	-	74	-31.53	0	101	H
			*3.866807	58.66	PK-U	33.5	0.00	-47.34	44.82	-	-	74	-29.18	0	101	H
			*3.883278	57.49	PK-U	33.5	0.00	-47.37	43.62	-	-	74	-30.38	0	101	V
			*3.888458	46.11	ADR	33.5	0.00	-47.65	31.96	54	-22.04	-	-	0	101	H
			*3.888806	46.21	ADR	33.5	0.00	-47.62	32.09	54	-21.91	-	-	0	101	V
			*11.058895	47.12	ADR	37.8	0.00	-44.92	40.00	54	-14	-	-	0	101	V
			*11.059059	46.80	ADR	37.8	0.00	-44.90	39.70	54	-14.3	-	-	0	101	H
			*11.068386	58.62	PK-U	37.9	0.00	-44.86	51.66	-	-	74	-22.34	0	101	H
			*11.074513	58.52	PK-U	37.9	0.00	-44.84	51.58	-	-	74	-22.42	0	101	V
			*1.134315	59.73	PK-U	27.8	0.00	-47.80	39.73	-	-	74	-34.27	1	101	H
			*1.137410	47.82	ADR	27.9	0.00	-47.83	27.89	54	-26.11	-	-	1	101	V
EHT20 (26T RU4)	6995	6+5	*1.140612	47.84	ADR	27.9	0.00	-47.85	27.89	54	-26.11	-	-	1	101	H
			*1.144427	59.02	PK-U	28.0	0.00	-47.82	39.20	-	-	74	-34.8	1	101	V
			*11.832901	54.38	PK-U	38.6	0.00	-41.95	51.03	-	-	74	-22.97	1	101	V
			*11.843988	42.31	ADR	38.6	0.00	-42.09	38.82	54	-15.18	-	-	1	101	H
			*11.856207	54.13	PK-U	38.6	0.00	-42.33	50.40	-	-	74	-23.6	1	101	H
			*11.860610	42.54	ADR	38.6	0.00	-42.44	38.70	54	-15.3	-	-	1	101	V
			*3.897243	55.08	PK-U	33.5	0.00	-44.87	43.71	-	-	74	-30.29	1	101	H
			*3.903982	43.34	ADR	33.5	0.00	-44.96	31.88	54	-22.12	-	-	1	101	V
			*3.908799	54.91	PK-U	33.5	0.00	-44.86	43.55	-	-	74	-30.45	1	101	V
			*3.911503	43.72	ADR	33.5	0.00	-44.88	32.34	54	-21.66	-	-	1	101	H
			*2.068676	60.41	PK-U	31.9	0.00	-49.00	43.31	-	-	88.2	-44.89	0	200	H
			*2.100499	49.10	ADR	31.8	0.00	-49.10	31.80	68.2	-36.4	-	-	0	200	H
EHT20 (26T RU8)	7095	6+5	*2.103026	61.37	PK-U	31.8	0.00	-49.10	44.07	-	-	88.2	-44.13	0	200	V
			*2.102337	49.17	ADR	31.8	0.00	-49.10	31.87	68.2	-36.33	-	-	0	200	V
			*10.003777	56.50	PK-U	37.4	0.00	-45.20	48.70	-	-	88.2	-39.5	0	200	H
			*10.031074	44.46	ADR	37.4	0.00	-45.19	36.67	68.2	-31.53	-	-	0	200	H
			*17.155774	53.31	PK-U	41.3	0.00	-40.28	54.33	-	-	88.2	-33.87	0	200	H
			*17.169841	41.51	ADR	41.3	0.00	-40.20	42.61	68.2	-25.59	-	-	0	200	H
			*10.029482	56.24	PK-U	37.4	0.00	-45.30	48.34	-	-	88.2	-39.86	0	200	V
			*10.012008	44.68	ADR	37.4	0.00	-45.30	36.78	68.2	-31.42	-	-	0	200	V
			*17.158466	53.09	PK-U	41.4	0.00	-40.20	54.29	-	-	88.2	-33.91	0	101	V
			*17.171100	41.48	ADR	41.3	0.00	-40.20	42.58	68.2	-25.62	-	-	0	101	V
			*3.100467	58.84	PK-U	33.1	0.00	-47.50	44.44	-	-	88.2	-43.76	0	101	H
			*3.091637	46.78	ADR	33.1	0.00	-47.54	32.34	68.2	-35.86	-	-	0	101	H
EHT20 (26T RU8)	7095	6+5	*3.087504	58.38	PK-U	33.1	0.00	-47.60	43.88	-	-	88.2	-44.32	0	199	V
			*3.091703	46.79	ADR	33.1	0.00	-47.53	32.36	68.2	-35.84	-	-	0	199	V
			*9.997069	56.35	PK-U	37.4	0.00	-45.20	48.55	-	-	88.2	-39.65	0	199	H
			*9.998089	44.65	ADR	37.4	0.00	-45.21	36.84	68.2	-31.36	-	-	0	199	H
			*17.163173	53.56	PK-U	41.4	0.00	-40.18	54.78	-	-	88.2	-33.42	0	199	H
			*17.172440	41.46	ADR	41.3	0.00	-40.20	42.56	68.2	-25.64	-	-	0	199	H
			*9.994293	56.49	PK-U	37.4	0.00	-45.20	48.69	-	-	88.2	-39.51	0	199	V
			*10.024850	44.65	ADR	37.4	0.00	-45.20	36.85	68.2	-31.35	-	-	0	199	V
			*17.169797	53.54	PK-U	41.3	0.00	-40.20	54.64	-	-	88.2	-33.56	0	101	V
			*17.159006	41.68	ADR	41.4	0.00	-40.20	42.88	68.2	-25.32	-	-	0	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

STATE B 20MHz Cont.

UNII-8 (MIMO CDD)	Channel Frequency MHz	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbt/FI tr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (52+26T RU70)	6895	6+5	1.856693	47.33	ADR	31.1	0.00	-47.40	31.03	68.2	-37.17	-	-	360	101	H
			1.857977	47.37	ADR	31.1	0.00	-47.40	31.07	68.2	-37.13	-	-	360	200	V
			1.860590	58.73	PK-U	31.1	0.00	-47.39	42.44	-	-	88.2	-45.76	360	101	H
			1.861519	58.66	PK-U	31.1	0.00	-47.39	42.37	-	-	88.2	-45.83	360	200	V
			3.273734	55.81	PK-U	33.0	0.00	-45.09	43.72	-	-	88.2	-44.48	360	200	V
			3.275476	43.76	ADR	33.0	0.00	-45.06	31.70	68.2	-36.5	-	-	360	101	H
			3.294025	43.76	ADR	33.0	0.00	-44.88	31.88	68.2	-36.32	-	-	360	200	V
			3.304469	55.39	PK-U	32.9	0.00	-44.92	43.37	-	-	88.2	-44.83	360	101	H
			*11.846613	54.16	PK-U	38.6	0.00	-42.14	50.62	-	-	74	-23.38	360	101	V
			*11.862903	54.11	PK-U	38.7	0.00	-42.44	50.37	-	-	74	-23.63	360	101	H
			*11.868862	42.34	ADR	38.7	0.00	-42.38	38.66	54	-15.34	-	-	360	101	V
			*11.880505	42.49	ADR	38.7	0.00	-42.05	39.14	54	-14.86	-	-	360	101	H
EHT20 (52+26T RU71)	6995	6+5	*2.801261	45.29	ADR	32.2	0.00	-46.41	31.08	54	-22.92	-	-	0	200	H
			*2.806989	57.46	PK-U	32.1	0.00	-46.40	43.16	-	-	74	-30.84	0	200	H
			*2.808116	45.34	ADR	32.1	0.00	-46.43	31.01	54	-22.99	-	-	0	200	V
			*2.812045	56.88	PK-U	32.1	0.00	-46.45	42.53	-	-	74	-31.47	0	200	V
			*11.795183	42.59	ADR	38.6	0.00	-42.62	38.57	54	-15.43	-	-	0	101	V
			*11.813866	54.40	PK-U	38.6	0.00	-42.27	50.73	-	-	74	-23.27	0	101	H
			*11.814629	54.13	PK-U	38.6	0.00	-42.27	50.46	-	-	74	-23.54	0	101	V
			*11.820618	42.30	ADR	38.6	0.00	-42.11	38.79	54	-15.21	-	-	0	101	H
			*15.875667	53.50	PK-U	40.7	0.00	-41.28	52.92	-	-	74	-21.08	0	200	V
			*15.881711	42.08	ADR	40.7	0.00	-41.32	41.46	54	-12.54	-	-	0	101	H
			*15.888094	42.03	ADR	40.7	0.00	-41.32	41.41	54	-12.59	-	-	0	200	V
			*15.910736	53.74	PK-U	40.7	0.00	-41.35	53.09	-	-	74	-20.91	0	101	H
EHT20 (52+26T RU72)	7095	6+5	* 3.536148	57.92	PK-U	33.2	0.00	-47.00	44.12	-	-	88.2	-44.08	360	101	H
			* 3.530335	45.96	ADR	33.2	0.00	-46.90	32.26	68.2	-35.94	-	-	360	101	H
			* 2.353041	60.11	PK-U	32.2	0.00	-48.90	43.41	-	-	74	-30.59	360	101	H
			* 2.345269	49.18	ADR	32.2	0.00	-48.90	32.48	54	-21.52	-	-	360	101	H
			* 3.527016	57.53	PK-U	33.2	0.00	-47.00	43.73	-	-	88.2	-44.47	360	101	V
			* 3.529206	46.14	ADR	33.2	0.00	-46.90	32.44	68.2	-35.76	-	-	360	101	V
			* 2.346571	60.25	PK-U	32.2	0.00	-48.84	43.61	-	-	74	-30.39	360	101	V
			* 2.345127	48.90	ADR	32.2	0.00	-48.90	32.20	54	-21.8	-	-	360	101	V
			14.178836	54.83	PK-U	39.1	0.00	-42.70	51.23	-	-	88.2	-36.97	360	101	H
			14.170956	43.11	ADR	39.1	0.00	-42.70	39.51	68.2	-28.69	-	-	360	101	H
			14.183923	55.20	PK-U	39.1	0.00	-42.70	51.60	-	-	88.2	-36.6	360	101	V
			14.178832	43.21	ADR	39.1	0.00	-42.70	39.61	68.2	-28.59	-	-	360	101	V

STATE A 40MHz

UNII-8 (MIMO CDD)	Channel Frequency MHz	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbt/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT40 (SU Mode)	6885	6+5	2.249511	61.23	PK-U	31.5	0.00	-50.00	42.73	-	-	74	-31.27	360	101	V
			2.249700	49.61	ADR	31.5	0.00	-49.96	31.15	54	-22.85	-	-	360	101	H
			2.250582	49.69	ADR	31.5	0.00	-50.02	31.17	54	-22.83	-	-	360	101	V
			2.282332	61.32	PK-U	31.6	0.00	-50.27	42.65	-	-	74	-31.35	360	101	H
			4.548389	59.64	PK-U	34.1	0.00	-48.50	45.24	-	-	74	-28.76	360	101	H
			4.557205	47.75	ADR	34.1	0.00	-48.44	33.41	54	-20.59	-	-	360	101	H
			4.569924	59.60	PK-U	34.1	0.00	-48.40	45.30	-	-	74	-28.7	360	101	V
			4.570298	47.66	ADR	34.1	0.00	-48.46	33.30	54	-20.7	-	-	360	101	V
			11.059716	46.71	ADR	37.8	0.00	-44.90	39.61	54	-14.39	-	-	360	101	H
			11.073958	46.84	ADR	37.9	0.00	-45.09	39.65	54	-14.35	-	-	360	101	V
			11.078446	58.43	PK-U	37.9	0.00	-44.51	51.82	-	-	74	-22.18	360	101	V
			11.085629	58.47	PK-U	37.9	0.00	-44.47	51.90	-	-	74	-22.1	360	101	H
			* 2.254525	49.59	ADR	31.5	0.00	-50.09	31.00	54	-23	-	-	360	101	H
			* 2.284175	61.20	PK-U	31.6	0.00	-50.05	42.75	-	-	74	-31.25	360	101	H
			* 4.008341	47.12	ADR	33.5	0.00	-48.07	32.55	54	-21.45	-	-	360	101	V
	6965		* 4.012346	47.05	ADR	33.5	0.00	-47.93	32.62	54	-21.38	-	-	360	101	H
			* 4.012800	47.33	ADR	33.5	0.00	-47.84	32.99	54	-21.01	-	-	360	101	H
			* 4.019812	58.72	PK-U	33.5	0.00	-48.02	44.20	-	-	74	-29.8	360	101	H
			* 4.027576	58.56	PK-U	33.5	0.00	-47.94	44.12	-	-	74	-29.88	360	101	H
			* 4.029574	58.78	PK-U	33.5	0.00	-47.87	44.41	-	-	74	-29.59	360	101	V
			* 15.872903	47.47	ADR	40.6	0.00	-45.52	42.55	54	-11.45	-	-	360	101	V
			* 15.891169	59.18	PK-U	40.7	0.00	-45.67	54.21	-	-	74	-19.79	360	101	H
			* 15.891793	47.63	ADR	40.7	0.00	-45.92	42.41	54	-11.59	-	-	360	101	H
			* 15.899904	59.30	PK-U	40.7	0.00	-45.91	54.09	-	-	74	-19.91	360	101	V
			* 2.234386	61.63	PK-U	31.5	0.00	-49.98	43.15	-	-	74	-30.85	360	101	H
			* 2.238322	49.75	ADR	31.5	0.00	-49.93	31.32	54	-22.68	-	-	360	101	V
			* 2.247012	49.68	ADR	31.5	0.00	-50.30	30.88	54	-23.12	-	-	360	101	H
			* 2.248774	61.43	PK-U	31.5	0.00	-50.15	42.78	-	-	74	-31.22	360	101	V
			* 3.996292	58.47	PK-U	33.5	0.00	-48.09	43.88	-	-	74	-30.12	360	101	H
			7085	* 3.999206	58.68	PK-U	33.5	0.00	-47.74	44.44	-	-	74	-29.56	360	101
	* 4.004393			47.26	ADR	33.5	0.00	-47.78	32.98	54	-21.02	-	-	360	101	H
	* 4.008068			47.20	ADR	33.5	0.00	-48.09	32.61	54	-21.39	-	-	360	101	V
	* 11.060604			46.73	ADR	37.8	0.00	-44.96	39.57	54	-14.43	-	-	360	101	V
	* 11.071318			58.48	PK-U	37.9	0.00	-44.76	51.62	-	-	74	-22.38	360	101	H
	* 11.083725			58.57	PK-U	37.9	0.00	-44.25	52.22	-	-	74	-21.78	360	101	V
	* 11.085045			46.61	ADR	37.9	0.00	-44.59	39.92	54	-14.08	-	-	360	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

STATE B 40MHz

UNII-8 (MIMO CDD)	Channel Frequency MHz	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cb/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT40 (SU Mode)	6885	6+5	*2.241344	49.64	ADR	31.5	0.00	-49.63	31.51	54	-22.49	-	-	360	101	H
			*2.246455	61.11	PK-U	31.5	0.00	-50.14	42.47	-	-	74	-31.53	360	101	H
			*2.253384	49.67	ADR	31.5	0.00	-49.99	31.18	54	-22.82	-	-	360	101	V
			*2.256944	61.20	PK-U	31.5	0.00	-50.11	42.59	-	-	74	-31.41	360	101	V
			*3.834622	46.42	ADR	33.5	0.00	-47.60	32.32	54	-21.68	-	-	360	101	V
			*3.84615	58.23	PK-U	33.5	0.00	-47.53	44.20	-	-	74	-29.8	360	101	V
			*3.848561	46.33	ADR	33.5	0.00	-47.54	32.29	54	-21.71	-	-	360	101	H
			*3.866932	58.41	PK-U	33.5	0.00	-47.31	44.60	-	-	74	-29.4	360	101	H
			*11.111177	46.08	ADR	37.9	0.00	-44.74	39.24	54	-14.76	-	-	360	101	V
			*11.117825	57.74	PK-U	37.9	0.00	-44.54	51.10	-	-	74	-22.9	360	101	V
			*11.135379	57.61	PK-U	37.9	0.00	-44.70	50.81	-	-	74	-23.19	360	101	H
			*11.14871	46.20	ADR	37.9	0.00	-45.24	38.86	54	-15.14	-	-	360	101	H
	6965		*2.243869	61.97	PK-U	31.5	0.00	-49.81	43.66	-	-	74	-30.34	360	101	H
			*2.249312	61.11	PK-U	31.5	0.00	-50.04	42.57	-	-	74	-31.43	360	101	V
			*2.250584	49.62	ADR	31.5	0.00	-50.02	31.10	54	-22.9	-	-	360	101	H
			*2.255169	49.90	ADR	31.5	0.00	-49.97	31.43	54	-22.57	-	-	360	101	V
			*3.819741	46.62	ADR	33.4	0.00	-47.50	32.52	54	-21.48	-	-	360	101	V
			*3.822626	46.84	ADR	33.4	0.00	-48.03	32.21	54	-21.79	-	-	360	101	H
			*3.823758	58.70	PK-U	33.4	0.00	-47.80	44.30	-	-	74	-29.7	360	101	V
			*3.844663	58.44	PK-U	33.5	0.00	-47.67	44.27	-	-	74	-29.73	360	101	H
			*11.054528	46.69	ADR	37.8	0.00	-44.99	39.50	54	-14.5	-	-	360	101	V
			*11.070127	58.47	PK-U	37.9	0.00	-44.77	51.60	-	-	74	-22.4	360	101	V
			*11.072838	46.70	ADR	37.9	0.00	-44.85	39.75	54	-14.25	-	-	360	101	H
			*11.07325	59.19	PK-U	37.9	0.00	-44.88	52.21	-	-	74	-21.79	360	101	H
	7085		*2.231121	61.23	PK-U	31.5	0.00	-50.10	42.63	-	-	74	-31.37	360	101	H
			*2.249377	49.87	ADR	31.5	0.00	-50.02	31.35	54	-22.65	-	-	360	101	H
			*2.250733	61.12	PK-U	31.5	0.00	-50.05	42.57	-	-	74	-31.43	360	101	V
			*2.251964	49.63	ADR	31.5	0.00	-50.10	31.03	54	-22.97	-	-	360	101	V
			*3.65659	46.70	ADR	33.5	0.00	-48.10	32.10	54	-21.9	-	-	360	101	V
			*3.66031	58.14	PK-U	33.5	0.00	-47.87	43.77	-	-	74	-30.23	360	101	H
			*3.661426	46.64	ADR	33.4	0.00	-47.84	32.20	54	-21.8	-	-	360	101	H
			*3.662464	58.46	PK-U	33.4	0.00	-47.99	43.87	-	-	74	-30.13	360	101	V
			*11.091546	46.21	ADR	37.9	0.00	-44.25	39.86	54	-14.14	-	-	360	101	V
			*11.091646	57.74	PK-U	37.9	0.00	-44.24	51.40	-	-	74	-22.6	360	101	V
			*11.09769	46.28	ADR	37.9	0.00	-44.34	39.84	54	-14.16	-	-	360	101	H
			*11.127859	58.18	PK-U	37.9	0.00	-44.70	51.38	-	-	74	-22.62	360	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

STATE A 80MHz

UNII-8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbl/ Ftr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT80 (SU Mode)	6945	6+5	* 2.238888	57.87	PK-U	32.2	0.00	-47.56	42.51	-	-	74	-31.49	360	101	V
			* 2.243155	46.45	ADR	32.2	0.00	-47.57	31.08	54	-22.92	-	-	360	101	V
			* 2.256959	46.45	ADR	32.2	0.00	-47.63	31.02	54	-22.98	-	-	360	101	H
			* 2.258536	58.23	PK-U	32.1	0.00	-47.64	42.69	-	-	74	-31.31	360	101	H
			* 4.686087	55.85	PK-U	34.1	0.00	-45.36	44.59	-	-	74	-29.41	360	101	V
			* 4.692039	55.46	PK-U	34.1	0.00	-45.40	44.16	-	-	74	-29.84	360	101	H
			* 4.701712	44.12	ADR	34.2	0.00	-45.38	32.94	54	-21.06	-	-	360	101	V
			* 4.718751	44.00	ADR	34.2	0.00	-45.37	32.83	54	-21.17	-	-	360	101	H
			* 15.596657	42.36	ADR	40.3	0.00	-41.23	41.43	54	-12.57	-	-	360	101	V
			* 15.606012	42.49	ADR	40.4	0.00	-41.19	41.70	54	-12.3	-	-	360	199	H
			* 15.612619	54.40	PK-U	40.4	0.00	-41.24	53.56	-	-	74	-20.44	360	199	H
			* 15.615195	54.47	PK-U	40.4	0.00	-41.30	53.57	-	-	74	-20.43	360	101	V
	7025		* 2.232066	58.47	PK-U	32.1	0.00	-47.50	43.07	-	-	74	-30.93	360	199	V
			* 2.238243	46.36	ADR	32.2	0.00	-47.54	31.02	54	-22.98	-	-	360	199	V
			* 2.242752	57.92	PK-U	32.2	0.00	-47.57	42.55	-	-	74	-31.45	360	101	H
			* 2.259617	46.40	ADR	32.1	0.00	-47.65	30.85	54	-23.15	-	-	360	101	H
			* 4.764682	55.98	PK-U	34.2	0.00	-45.13	45.05	-	-	74	-28.95	360	199	H
			* 4.767233	43.81	ADR	34.2	0.00	-45.09	32.92	54	-21.08	-	-	360	199	H
			* 4.778089	55.56	PK-U	34.2	0.00	-45.02	44.74	-	-	74	-29.26	360	101	V
			* 4.793527	43.87	ADR	34.2	0.00	-44.98	33.09	54	-20.91	-	-	360	101	V
			15.967477	42.08	ADR	40.8	0.00	-40.98	41.90	54	-12.1	-	-	360	200	H
			15.977120	42.01	ADR	40.8	0.00	-41.21	41.60	54	-12.4	-	-	360	200	V
			15.978540	53.88	PK-U	40.8	0.00	-41.22	53.46	-	-	74	-20.54	360	200	V
			15.979860	53.93	PK-U	40.8	0.00	-41.22	53.51	-	-	74	-20.49	360	200	H
EHT80 (484+242T RU93)	6945	6+5	* 1.695939	46.81	ADR	29.1	0.00	-47.75	28.16	54	-25.84	-	-	0	101	V
			* 1.703622	58.58	PK-U	29.2	0.00	-47.75	40.03	-	-	74	-33.97	0	101	H
			* 1.703663	58.91	PK-U	29.2	0.00	-47.75	40.36	-	-	74	-33.64	0	101	V
			* 1.703902	46.94	ADR	29.2	0.00	-47.75	28.39	54	-25.61	-	-	0	101	H
			3.125724	55.99	PK-U	33.1	0.00	-45.40	43.69	-	-	88.2	-44.51	0	101	H
			3.129929	56.23	PK-U	33.1	0.00	-45.44	43.89	-	-	88.2	-44.31	0	101	V
			3.136026	44.16	ADR	33.1	0.00	-45.36	31.90	68.2	-36.3	-	-	0	101	V
			3.136145	44.03	ADR	33.1	0.00	-45.36	31.77	68.2	-36.43	-	-	0	101	H
			* 11.576394	42.76	ADR	38.2	0.00	-42.67	38.29	54	-15.71	-	-	0	101	H
			* 11.576582	54.32	PK-U	38.2	0.00	-42.67	49.85	-	-	74	-24.15	0	101	H
			* 11.584982	42.63	ADR	38.2	0.00	-42.44	38.39	54	-15.61	-	-	326	101	V
			* 11.599036	54.27	PK-U	38.3	0.00	-42.15	50.42	-	-	74	-23.58	326	101	V
EHT80 (484+242T RU90)	7025	6+5	* 2.337799	58.33	PK-U	32.1	0.00	-47.43	43.00	-	-	74	-31	0	200	V
			* 2.362299	46.61	ADR	32.2	0.00	-47.48	31.33	54	-22.67	-	-	0	200	V
			* 2.854894	45.08	ADR	32.0	0.00	-46.27	30.81	54	-23.19	-	-	0	101	H
			* 2.85956	56.54	PK-U	32.0	0.00	-46.23	42.31	-	-	74	-31.69	0	101	H
			* 3.683167	55.27	PK-U	33.0	0.00	-45.08	43.19	-	-	74	-30.81	0	101	V
			* 3.684728	55.42	PK-U	33.0	0.00	-45.04	43.38	-	-	74	-30.62	0	101	H
			* 3.694765	43.80	ADR	32.9	0.00	-45.14	31.56	54	-22.44	-	-	0	101	V
			* 3.710351	43.58	ADR	33.0	0.00	-45.23	31.35	54	-22.65	-	-	0	101	H
			* 10.797001	54.62	PK-U	37.6	0.00	-42.75	49.47	-	-	74	-24.53	0	200	H
			* 10.801228	43.08	ADR	37.6	0.00	-42.60	38.08	54	-15.92	-	-	0	101	V
			* 10.803608	42.83	ADR	37.6	0.00	-42.55	37.88	54	-16.12	-	-	0	200	H
			* 10.81897	54.42	PK-U	37.6	0.00	-42.29	49.73	-	-	74	-24.27	0	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

STATE B 80MHz

UNII-8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbl/ Fitr/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT80 (SU Mode)	6945	6+5	*2.238362	46.27	ADR	32.2	0.00	-47.55	30.92	54	-23.08	-	-	360	101	H
			*2.238752	58.37	PK-U	32.2	0.00	-47.56	43.01	-	-	74	-30.99	360	101	V
			*2.241054	46.18	ADR	32.2	0.00	-47.56	30.82	54	-23.18	-	-	360	101	V
			*2.244224	58.37	PK-U	32.2	0.00	-47.59	42.98	-	-	74	-31.02	360	101	H
			*4.902746	55.92	PK-U	34.2	0.00	-44.40	45.72	-	-	74	-28.28	360	200	V
			*4.925989	44.18	ADR	34.2	0.00	-44.52	33.86	54	-20.14	-	-	360	101	H
			*4.927383	43.97	ADR	34.2	0.00	-44.52	33.65	54	-20.35	-	-	360	200	V
			*4.933499	55.86	PK-U	34.2	0.00	-44.59	45.47	-	-	74	-28.53	360	101	H
			*15.978018	53.70	PK-U	40.8	0.00	-41.21	53.29	-	-	74	-20.71	360	200	H
			*15.989152	42.31	ADR	40.8	0.00	-41.38	41.73	54	-12.27	-	-	360	200	H
			*15.991732	42.26	ADR	40.8	0.00	-41.38	41.68	54	-12.32	-	-	360	200	V
			*15.9934	54.17	PK-U	40.8	0.00	-41.39	53.58	-	-	74	-20.42	360	200	V
	7025		2.185400	57.53	PK-U	31.9	0.00	-47.21	42.22	-	-	88.2	-45.98	360	200	H
			2.186193	58.20	PK-U	31.9	0.00	-47.22	42.88	-	-	88.2	-45.32	360	200	V
			2.186222	46.24	ADR	31.9	0.00	-47.22	30.92	68.2	-37.28	-	-	360	200	H
			2.196379	46.08	ADR	31.9	0.00	-47.29	30.69	68.2	-37.51	-	-	360	200	V
			*4.738091	56.32	PK-U	34.2	0.00	-45.29	45.23	-	-	74	-28.77	360	200	V
			*4.739282	44.20	ADR	34.2	0.00	-45.28	33.12	54	-20.88	-	-	360	200	V
			*4.743363	56.68	PK-U	34.2	0.00	-45.25	45.63	-	-	74	-28.37	360	200	H
			*4.744323	44.19	ADR	34.2	0.00	-45.25	33.14	54	-20.86	-	-	360	200	H
			*15.885387	54.65	PK-U	40.7	0.00	-41.31	54.04	-	-	74	-19.96	360	200	H
			*15.886887	54.70	PK-U	40.7	0.00	-41.29	54.11	-	-	74	-19.89	360	200	V
			*15.890658	42.49	ADR	40.7	0.00	-41.33	41.86	54	-12.14	-	-	360	200	H
			*15.898881	42.64	ADR	40.7	0.00	-41.26	42.08	54	-11.92	-	-	360	200	V
EHT80 (484+242T RU90)	7025	6+5	* 2.675713	59.58	PK-U	32.7	0.00	-48.60	43.68	-	-	88.2	-44.52	0	101	H
			* 2.712065	48.07	ADR	32.6	0.00	-48.60	32.07	54	-21.93	-	-	0	101	H
			* 3.855194	57.64	PK-U	33.4	0.00	-47.20	43.84	-	-	74	-30.16	0	101	H
			* 3.862713	46.10	ADR	33.4	0.00	-47.30	32.20	54	-21.8	-	-	0	101	H
			* 2.708859	60.11	PK-U	32.6	0.00	-48.60	44.11	-	-	74	-29.89	0	200	V
			* 2.706570	48.16	ADR	32.6	0.00	-48.60	32.16	54	-21.84	-	-	0	200	V
			* 3.857869	57.86	PK-U	33.4	0.00	-47.20	44.06	-	-	74	-29.94	0	200	V
			* 3.863233	46.45	ADR	33.4	0.00	-47.30	32.55	54	-21.45	-	-	0	200	V
			9.649854	56.28	PK-U	36.9	0.00	-45.10	48.08	-	-	88.2	-40.12	0	200	H
			9.678839	44.59	ADR	37.0	0.00	-45.30	36.29	68.2	-31.91	-	-	0	200	H
			9.658586	56.19	PK-U	36.9	0.00	-44.80	48.29	-	-	88.2	-39.91	0	200	V
			9.687939	44.56	ADR	37.0	0.00	-45.10	36.46	68.2	-31.74	-	-	0	200	V
EHT80 (484+242T RU93)	6945	6+5	* 2.764042	59.76	PK-U	32.5	0.00	-48.50	43.76	-	-	74	-30.24	1	101	H
			* 2.768223	47.98	ADR	32.5	0.00	-48.50	31.98	54	-22.02	-	-	1	101	H
			* 4.105224	57.42	PK-U	33.5	0.00	-47.10	43.82	-	-	74	-30.18	1	200	H
			* 4.119316	45.98	ADR	33.5	0.00	-47.20	32.28	54	-21.72	-	-	1	200	H
			* 2.777507	60.15	PK-U	32.6	0.00	-48.40	44.35	-	-	74	-29.65	1	101	V
			* 2.772867	48.03	ADR	32.6	0.00	-48.50	32.13	54	-21.87	-	-	1	101	V
			* 4.080071	57.72	PK-U	33.4	0.00	-47.00	44.12	-	-	74	-29.88	1	101	V
			* 4.117494	45.67	ADR	33.5	0.00	-47.20	31.97	54	-22.03	-	-	1	101	V
			10.274327	57.15	PK-U	37.6	0.00	-45.00	49.75	-	-	88.2	-38.45	1	200	H
			10.270719	45.13	ADR	37.6	0.00	-44.90	37.83	68.2	-30.37	-	-	1	200	H
			10.269399	57.61	PK-U	37.6	0.00	-44.90	50.31	-	-	88.2	-37.89	1	200	V
			10.272027	44.93	ADR	37.6	0.00	-44.90	37.63	68.2	-30.57	-	-	1	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

STATE A 160MHz

UNII-8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbl/ Filt/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	6985	6 + 5	* 2.235027	58.21	PK-U	32.2	0.00	-47.52	42.89	-	-	74	-31.11	1	101	V
			* 2.250618	58.42	PK-U	32.2	0.00	-47.61	43.01	-	-	74	-30.99	1	200	H
			* 2.263144	46.52	ADR	32.1	0.00	-47.64	30.98	54	-23.02	-	-	1	101	V
			* 2.267954	46.53	ADR	32.1	0.00	-47.63	31.00	54	-23	-	-	1	200	H
			* 4.798142	43.57	ADR	34.2	0.00	-44.95	32.82	54	-21.18	-	-	1	101	H
			* 4.800032	43.68	ADR	34.2	0.00	-44.97	32.91	54	-21.09	-	-	1	101	V
			* 4.800494	55.98	PK-U	34.2	0.00	-44.96	45.22	-	-	74	-28.78	1	101	V
			* 4.812456	55.32	PK-U	34.2	0.00	-44.86	44.66	-	-	74	-29.34	1	101	H
			* 15.884971	42.62	ADR	40.7	0.00	-41.31	42.01	54	-11.99	-	-	1	199	V
			* 15.886919	42.57	ADR	40.7	0.00	-41.29	41.98	54	-12.02	-	-	1	199	V
			* 15.887066	42.79	ADR	40.7	0.00	-41.29	42.20	54	-11.8	-	-	1	199	H
			* 15.887354	54.46	PK-U	40.7	0.00	-41.30	53.86	-	-	74	-20.14	1	199	V
EHT160 (996+484+2 42T RU99)	6985	6+5	* 1.351744	31.23	ADR	29.1	0.00	-27.40	32.93	54	-21.07	-	-	0	201	V
			* 1.357192	43.24	PK-U	29.0	0.00	-27.46	44.78	-	-	74	-29.22	0	201	V
			* 1.379534	31.33	ADR	28.9	0.00	-27.35	32.88	54	-21.12	-	-	0	100	H
			* 1.392719	42.88	PK-U	28.8	0.00	-27.37	44.31	-	-	74	-29.69	0	100	H
			* 11.509851	55.96	PK-U	38.3	0.00	-44.77	49.49	-	-	74	-24.51	0	201	V
			* 11.524640	44.65	ADR	38.4	0.00	-44.87	38.18	54	-15.82	-	-	0	201	V
			* 11.556953	44.57	ADR	38.4	0.00	-44.65	38.32	54	-15.68	-	-	0	100	H
			* 11.558463	56.16	PK-U	38.4	0.00	-44.66	49.90	-	-	74	-24.1	0	100	H
			* 3.903837	42.85	PK-U	33.9	0.00	-25.25	51.50	-	-	74	-22.5	0	200	V
			* 3.906605	30.82	ADR	33.9	0.00	-25.28	39.44	54	-14.56	-	-	0	200	V
			* 3.935568	30.88	ADR	33.9	0.00	-25.29	39.49	54	-14.51	-	-	0	100	H
			* 3.940250	42.77	PK-U	33.9	0.00	-25.29	51.38	-	-	74	-22.62	0	100	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

STATE B 160MHz

UNII-8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbl/ Filt/Pad (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	6985	6 + 5	*2.248909	46.58	ADR	32.2	0.00	-47.60	31.18	54	-22.82	-	-	0	101	V
			*2.249874	57.96	PK-U	32.2	0.00	-47.62	42.54	-	-	74	-31.46	0	101	V
			*2.257771	58.55	PK-U	32.2	0.00	-47.65	43.10	-	-	74	-30.9	0	200	H
			*2.259553	46.32	ADR	32.1	0.00	-47.65	30.77	54	-23.23	-	-	0	200	H
			*4.768278	43.71	ADR	34.2	0.00	-45.08	32.83	54	-21.17	-	-	0	200	V
			*4.781347	55.45	PK-U	34.2	0.00	-44.98	44.67	-	-	74	-29.33	0	200	V
			*4.791745	55.98	PK-U	34.2	0.00	-44.98	45.20	-	-	74	-28.8	0	101	H
			*4.797708	43.74	ADR	34.2	0.00	-44.96	32.98	54	-21.02	-	-	0	101	H
			*15.978509	54.10	PK-U	40.8	0.00	-41.22	53.68	-	-	74	-20.32	0	200	H
			*15.990844	54.33	PK-U	40.8	0.00	-41.40	53.73	-	-	74	-20.27	0	200	V
			*15.994328	42.40	ADR	40.8	0.00	-41.43	41.77	54	-12.23	-	-	0	200	H
EHT160 (996+484+2 42T S99)	6985	6+5	*16.000931	42.60	ADR	40.8	0.00	-41.33	42.07	54	-11.93	-	-	0	200	V
			* 1.307066	31.32	ADR	29.3	0.00	-27.45	33.17	54	-20.83	-	-	360	201	V
			* 1.328673	42.95	PK-U	29.2	0.00	-27.51	44.64	-	-	74	-29.36	360	201	V
			* 1.361266	42.69	PK-U	29.0	0.00	-27.42	44.27	-	-	74	-29.73	360	100	H
			* 1.367225	31.28	ADR	29.0	0.00	-27.41	32.87	54	-21.13	-	-	360	100	H
			* 16.049155	56.56	PK-U	40.5	0.00	-42.99	54.07	-	-	74	-19.93	360	100	H
			* 16.068120	56.36	PK-U	40.5	0.00	-43.17	53.69	-	-	74	-20.31	360	201	V
			* 16.068629	44.66	ADR	40.5	0.00	-43.20	41.96	54	-12.04	-	-	360	100	H
			* 16.077278	44.63	ADR	40.5	0.00	-43.15	41.98	54	-12.02	-	-	360	201	V
			* 4.931255	31.96	ADR	34.4	0.00	-24.62	41.74	54	-12.26	-	-	360	100	H
			* 4.944337	43.85	PK-U	34.4	0.00	-24.72	53.53	-	-	74	-20.47	360	100	H
			* 4.967974	32.11	ADR	34.3	0.00	-24.59	41.82	54	-12.18	-	-	360	200	V
			* 4.980279	43.70	PK-U	34.3	0.00	-24.45	53.55	-	-	74	-20.45	360	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band



PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

WORST-CASE HARMONICS AND SPURIOUS EMISSIONS

STATE A

802.11be EHT40 / 183 & 6965 / 2TX / CDD / SU

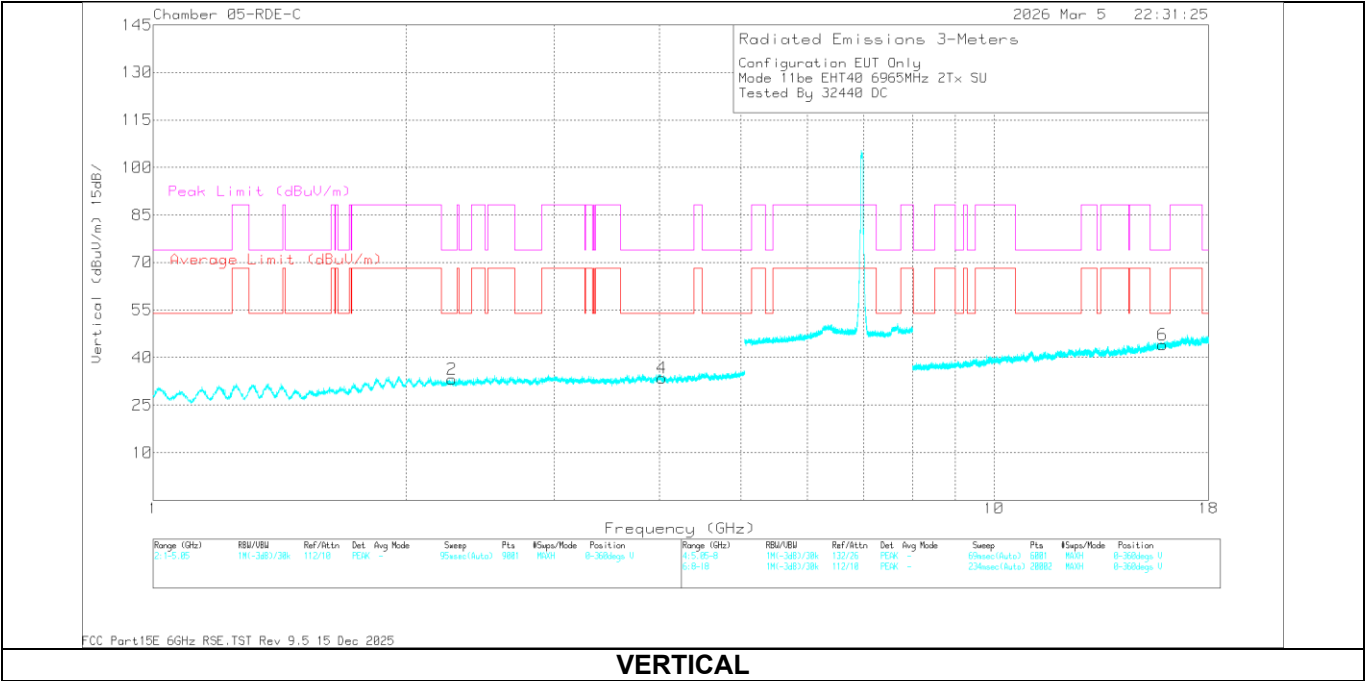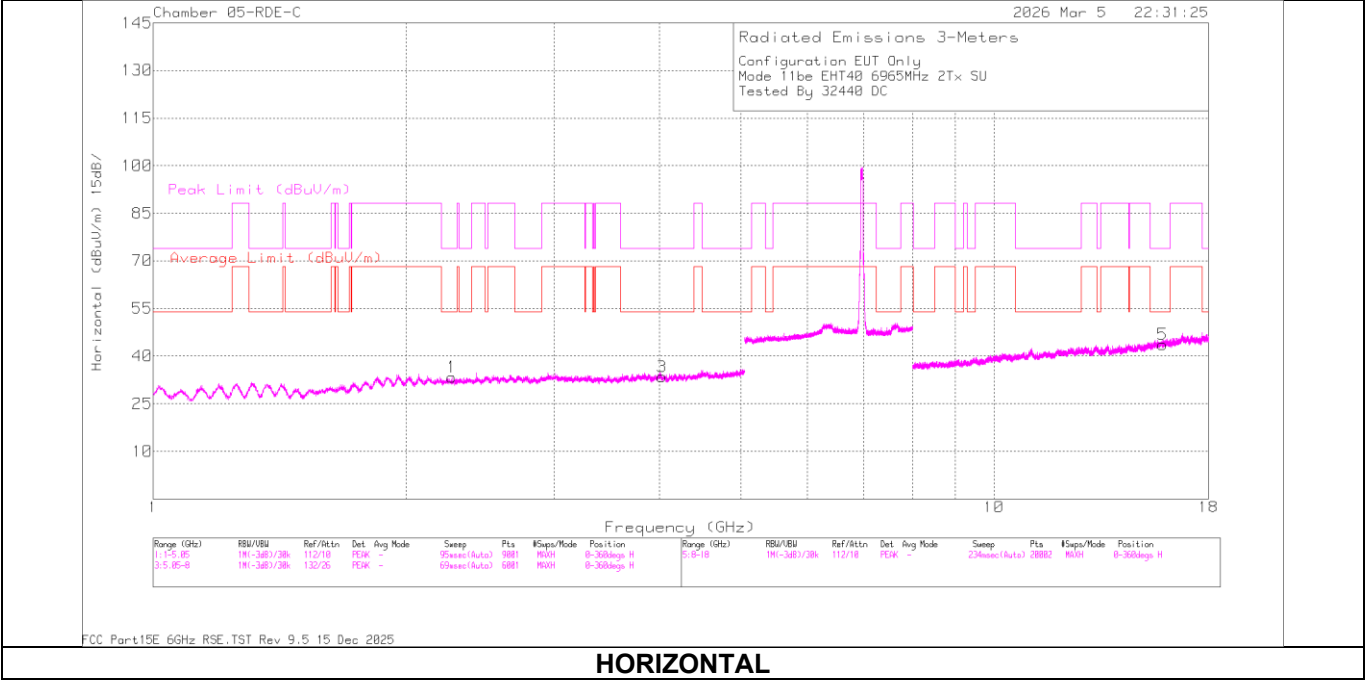

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbt/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 2.254525	49.59	ADR	31.5	0.00	-50.09	31.00	54	-23	-	-	360	101	H
* 2.284175	61.20	PK-U	31.6	0.00	-50.05	42.75	-	-	74	-31.25	360	101	H
* 4.008341	47.12	ADR	33.5	0.00	-48.07	32.55	54	-21.45	-	-	360	101	V
* 4.012346	47.05	ADR	33.5	0.00	-47.93	32.62	54	-21.38	-	-	360	101	H
* 4.0128	47.33	ADR	33.5	0.00	-47.84	32.99	54	-21.01	-	-	360	101	H
* 4.019812	58.72	PK-U	33.5	0.00	-48.02	44.20	-	-	74	-29.8	360	101	H
* 4.027576	58.56	PK-U	33.5	0.00	-47.94	44.12	-	-	74	-29.88	360	101	H
* 4.029574	58.78	PK-U	33.5	0.00	-47.87	44.41	-	-	74	-29.59	360	101	V
* 15.872903	47.47	ADR	40.6	0.00	-45.52	42.55	54	-11.45	-	-	360	101	V
* 15.891169	59.18	PK-U	40.7	0.00	-45.67	54.21	-	-	74	-19.79	360	101	H
* 15.891793	47.63	ADR	40.7	0.00	-45.92	42.41	54	-11.59	-	-	360	101	H
* 15.899904	59.30	PK-U	40.7	0.00	-45.91	54.09	-	-	74	-19.91	360	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

STATE B
802.11be EHT80 / 215 & 7025 / 2TX / CDD / SU

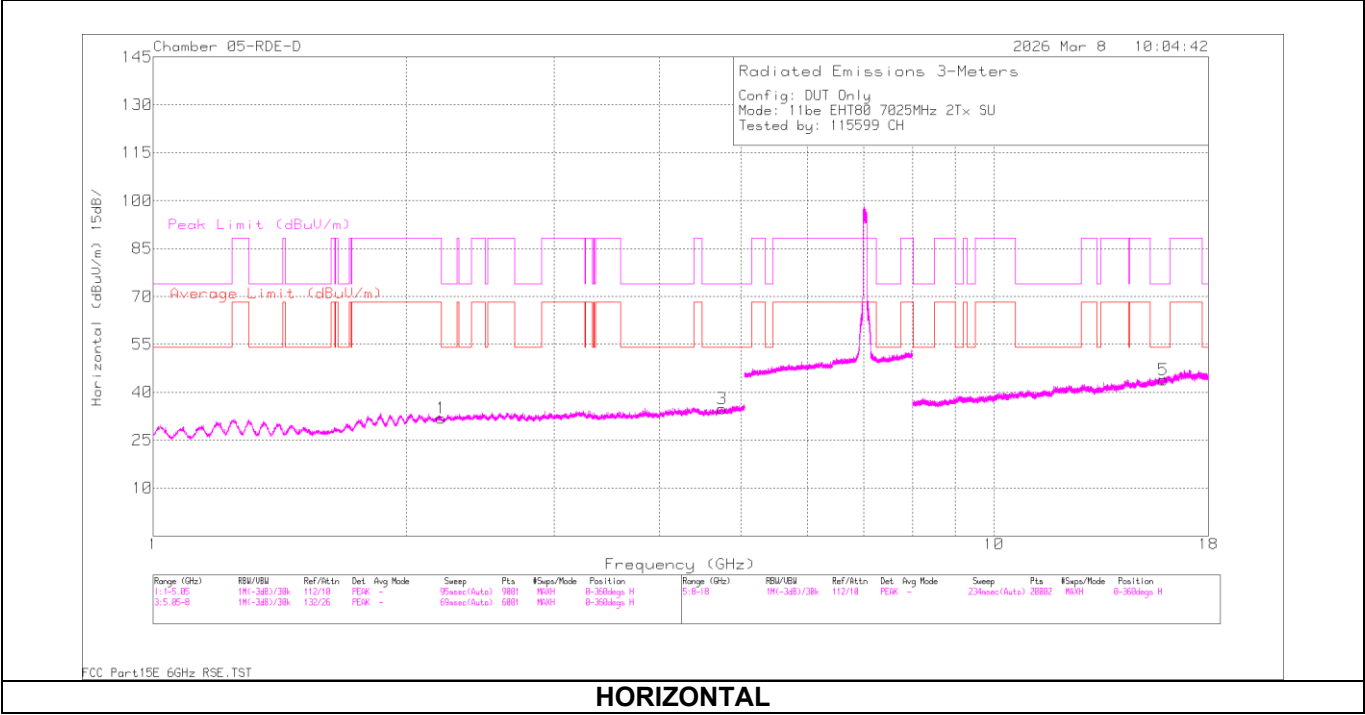

HORIZONTAL

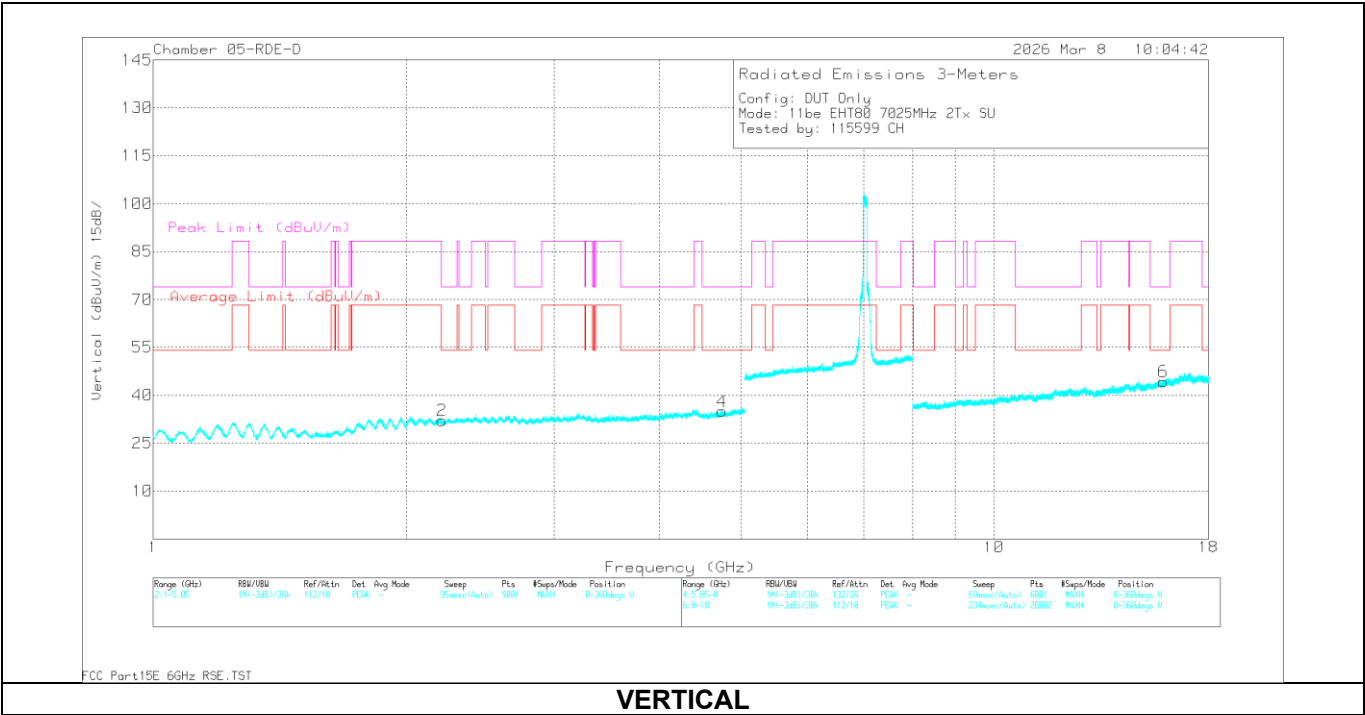

VERTICAL

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	DCCF (dB)	Amp/Cbt/ Filt/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2.1854	57.53	PK-U	31.9	0.00	-47.21	42.22	-	-	88.2	-45.98	360	200	H
2.186193	58.20	PK-U	31.9	0.00	-47.22	42.88	-	-	88.2	-45.32	360	200	V
2.186222	46.24	ADR	31.9	0.00	-47.22	30.92	68.20	-37.28	-	-	360	200	H
2.196379	46.08	ADR	31.9	0.00	-47.29	30.69	68.20	-37.51	-	-	360	200	V
* 4.738091	56.32	PK-U	34.2	0.00	-45.29	45.23	-	-	74	-28.77	360	200	V
* 4.739282	44.20	ADR	34.2	0.00	-45.28	33.12	54.00	-20.88	-	-	360	200	V
* 4.743363	56.68	PK-U	34.2	0.00	-45.25	45.63	-	-	74	-28.37	360	200	H
* 4.744323	44.19	ADR	34.2	0.00	-45.25	33.14	54.00	-20.86	-	-	360	200	H
* 15.885387	54.65	PK-U	40.7	0.00	-41.31	54.04	-	-	74	-19.96	360	200	H
* 15.886887	54.70	PK-U	40.7	0.00	-41.29	54.11	-	-	74	-19.89	360	200	V
* 15.890658	42.49	ADR	40.7	0.00	-41.33	41.86	54.00	-12.14	-	-	360	200	H
* 15.898881	42.64	ADR	40.7	0.00	-41.26	42.08	54.00	-11.92	-	-	360	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.2. TRANSMITTER OUTSIDE 6.115 - 7.125 GHz, 1- 18GHz (VLP)

1.2.1. 802.11be SISO/MIMO MODE IN UNII-5 BAND – LOW BANDEDGE

The UNII-5 band was excluded from band-edge testing because its starting frequency lies well inside the band-edge threshold.

1.2.2. 802.11a SISO MODE IN UNII-8 BAND – BANDEDGE

STATE A

UNII-8 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11a	7115	6	7.125	-25.89	Pk	35.7	11.8	0	-36.81	-15.2	-	-	-7	-8.2	34	267	H
			7.125068	-26.05	Pk	35.7	11.8	0	-36.81	-15.36	-	-	-7	-8.36	34	267	H
			7.125	-43.38	RMS	35.7	11.8	0	-36.81	-32.69	-27	-5.69	-	-	34	267	H
			7.372402	-58.95	RMS	35.7	11.8	0	-36.73	-48.18	-41.2	-6.98	-	-	34	267	H
			7.125	-23.24	Pk	35.7	11.8	0	-36.81	-12.55	-	-	-7	-5.55	358	185	V
			7.125068	-24.2	Pk	35.7	11.8	0	-36.81	-13.51	-	-	-7	-6.51	358	185	V
		5	7.125	-40.51	RMS	35.7	11.8	0	-36.81	-29.82	-27	-2.82	-	-	358	185	V
			7.125068	-42.2	RMS	35.7	11.8	0	-36.81	-31.51	-27	-4.51	-	-	358	185	V
			7.125	-31.53	Pk	35.7	11.8	0	-36.81	-20.84	-	-	-7	-13.84	349	298	H
			7.125145	-31.43	Pk	35.7	11.8	0	-36.81	-20.74	-	-	-7	-13.74	349	298	H
			7.125	-48.83	RMS	35.7	11.8	0	-36.81	-38.14	-27	-11.14	-	-	349	298	H
			7.37279	-58.89	RMS	35.8	11.8	0	-36.72	-48.01	-41.2	-6.81	-	-	349	298	H
			7.125	-22.71	Pk	35.7	11.8	0	-36.81	-12.02	-	-	-7	-5.02	10	262	V
			7.125145	-22.9	Pk	35.7	11.8	0	-36.81	-12.21	-	-	-7	-5.21	10	262	V
			7.125	-40.83	RMS	35.7	11.8	0	-36.81	-30.14	-27	-3.14	-	-	10	262	V
			7.125068	-42.02	RMS	35.7	11.8	0	-36.81	-31.33	-27	-4.33	-	-	10	262	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

STATE B

UNII-8 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11a	7115	6	7.125	-26.47	Pk	35.7	11.8	0	-37.4	-16.37	-	-	-7	-9.37	151	189	H
			7.125068	-27.57	Pk	35.7	11.8	0	-37.4	-17.47	-	-	-7	-10.47	151	189	H
			7.125	-44.13	RMS	35.7	11.8	0	-37.4	-34.03	-27	-7.03	-	-	151	189	H
			7.125068	-44.49	RMS	35.7	11.8	0	-37.4	-34.39	-27	-7.39	-	-	151	189	H
			7.125	-23.12	Pk	35.7	11.8	0	-37.4	-13.02	-	-	-7	-6.02	234	182	V
			7.125068	-22.37	Pk	35.7	11.8	0	-37.4	-12.27	-	-	-7	-5.27	234	182	V
		5	7.125	-40.85	RMS	35.7	11.8	0	-37.4	-30.75	-27	-3.75	-	-	234	182	V
			7.125068	-41.16	RMS	35.7	11.8	0	-37.4	-31.06	-27	-4.06	-	-	234	182	V
			7.125	-30.78	Pk	35.7	11.8	0	-36.81	-20.09	-	-	-7	-13.09	264	106	H
			7.125068	-30.59	Pk	35.7	11.8	0	-36.81	-19.9	-	-	-7	-12.9	264	106	H
			7.125	-47.56	RMS	35.7	11.8	0	-36.81	-36.87	-27	-9.87	-	-	264	106	H
			7.429724	-58.87	RMS	35.8	11.8	0	-36.64	-47.91	-41.2	-6.71	-	-	264	106	H
			7.125	-22.52	Pk	35.7	11.8	0	-36.81	-11.83	-	-	-7	-4.83	328	189	V
			7.125068	-23.51	Pk	35.7	11.8	0	-36.81	-12.82	-	-	-7	-5.82	328	189	V
			7.125	-41.47	RMS	35.7	11.8	0	-36.81	-30.78	-27	-3.78	-	-	328	189	V
			7.125068	-41.9	RMS	35.7	11.8	0	-36.81	-31.21	-27	-4.21	-	-	328	189	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.2.3. 802.11be SISO SU MODE IN UNII-8 BAND – BANDEDGE**STATE A**

UNII-8 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (SU Mode)	7095	6	7.125	-47.17	Pk	35.6	11.8	0	-33.02	-32.79	-	-	-7	-25.79	56	236	H
			* 7.392313	-49.98	Pk	35.6	11.8	0	-32.45	-35.03	-	-	-21.2	-13.83	56	236	H
			7.125	-61.03	RMS	35.6	11.8	0	-33.02	-46.65	-27	-19.65	-	-	56	236	H
			* 7.514891	-61.8	RMS	35.7	11.8	0	-32.4	-46.7	-41.2	-5.5	-	-	56	236	H
			7.125	-46.19	Pk	35.6	11.8	0	-33.02	-31.81	-	-	-7	-24.81	118	212	V
			* 7.510302	-50.11	Pk	35.6	11.8	0	-32.37	-35.08	-	-	-21.2	-13.88	118	212	V
		5	7.125	-59.29	RMS	35.6	11.8	0	-33.02	-44.91	-27	-17.91	-	-	118	212	V
			* 7.494124	-61.65	RMS	35.6	11.8	0	-32.51	-46.76	-41.2	-5.56	-	-	118	212	V
			7.125	-39.6	Pk	35.6	11.8	0	-33.02	-25.22	-	-	-7	-18.22	31	134	H
			* 7.51738	-50.2	Pk	35.7	11.8	0	-32.48	-35.18	-	-	-21.2	-13.98	31	134	H
			7.125	-56.54	RMS	35.6	11.8	0	-33.02	-42.16	-27	-15.16	-	-	31	134	H
			* 7.515202	-61.73	RMS	35.7	11.8	0	-32.41	-46.64	-41.2	-5.44	-	-	31	134	H
			7.125	-33.27	Pk	35.6	11.8	0	-33.02	-18.89	-	-	-7	-11.89	98	251	V
			7.125223	-30.66	Pk	35.6	11.8	0	-33.02	-16.28	-	-	-7	-9.28	98	251	V
			7.125	-51.4	RMS	35.6	11.8	0	-33.02	-37.02	-27	-10.02	-	-	98	251	V
			* 7.490002	-61.81	RMS	35.6	11.8	0	-32.41	-46.82	-41.2	-5.62	-	-	98	251	V
EHT40 (SU Mode)	7085	6	7.125	-36.64	Pk	35.6	11.8	0	-33.86	-23.1	-	-	-7	-16.1	294	101	H
			* 7.511702	-49.97	Pk	35.7	11.8	0	-33.01	-35.48	-	-	-21.2	-14.28	294	101	H
			7.125	-53.07	RMS	35.6	11.8	0	-33.86	-39.53	-27	-12.53	-	-	294	101	H
			* 7.50478	-61.48	RMS	35.6	11.8	0	-33.04	-47.12	-41.2	-5.92	-	-	294	101	H
			7.125	-32.74	Pk	35.6	11.8	0	-33.86	-19.2	-	-	-7	-12.2	5	151	V
			7.126156	-31.22	Pk	35.6	11.8	0	-33.86	-17.68	-	-	-7	-10.68	5	151	V
		5	7.125	-48.24	RMS	35.6	11.8	0	-33.86	-34.7	-27	-7.7	-	-	5	151	V
			* 7.520102	-61.75	RMS	35.7	11.8	0	-32.98	-47.23	-41.2	-6.03	-	-	5	151	V
			7.125	-38.78	Pk	35.6	11.8	0	-33.86	-25.24	-	-	-7	-18.24	285	125	H
			* 7.49988	-49.27	Pk	35.6	11.8	0	-33.06	-34.93	-	-	-21.2	-13.73	285	125	H
			7.125	-52.11	RMS	35.6	11.8	0	-33.86	-38.57	-27	-11.57	-	-	285	125	H
			* 7.515824	-61.64	RMS	35.7	11.8	0	-33	-47.14	-41.2	-5.94	-	-	285	125	H
			7.125	-30.58	Pk	35.6	11.8	0	-33.86	-17.04	-	-	-7	-10.04	320	223	V
			7.126312	-28.62	Pk	35.6	11.8	0	-33.86	-15.08	-	-	-7	-8.08	320	223	V
			7.125	-44.93	RMS	35.6	11.8	0	-33.86	-31.39	-27	-4.39	-	-	320	223	V
			7.125534	-43.84	RMS	35.6	11.8	0	-33.86	-30.3	-27	-3.3	-	-	320	223	V
EHT80 (SU Mode)	7025	6	7125	-47	Pk	35.8	11.8	0	-32.8	-32.2	-	-	-7	-25.2	198	159	H
			* 7407.791	-52.54	Pk	35.7	11.8	0	-32.6	-37.64	-	-	-21.2	-16.44	198	159	H
			7125	-60.61	RMS	35.8	11.8	0	-32.8	-45.81	-27	-18.81	-	-	198	159	H
			* 7411.446	-64.57	RMS	35.7	11.8	0	-32.6	-49.67	-41.2	-8.47	-	-	198	159	H
			7125	-42.6	Pk	35.8	11.8	0	-32.8	-27.8	-	-	-7	-20.8	273	176	V
			* 7445.435	-52.42	Pk	35.7	11.8	0	-32.5	-37.42	-	-	-21.2	-16.22	273	176	V
		5	7125	-57.24	RMS	35.8	11.8	0	-32.8	-42.44	-27	-15.44	-	-	273	176	V
			* 7477.091	-64.57	RMS	35.7	11.8	0	-32.5	-49.57	-41.2	-8.37	-	-	273	176	V
			7.125	-41.68	Pk	35.6	11.8	0	-33.02	-27.3	-	-	-7	-20.3	55	117	H
			* 7.459513	-50.18	Pk	35.6	11.8	0	-32.46	-35.24	-	-	-21.2	-14.04	55	117	H
			7.125	-55.65	RMS	35.6	11.8	0	-33.02	-41.27	-27	-14.27	-	-	55	117	H
			* 7.519324	-61.51	RMS	35.7	11.8	0	-32.53	-46.54	-41.2	-5.34	-	-	55	117	H
			7.125	-33.46	Pk	35.6	11.8	0	-33.02	-19.08	-	-	-7	-12.08	92	225	V
			7.125223	-33.22	Pk	35.6	11.8	0	-33.02	-18.84	-	-	-7	-11.84	92	225	V
			7.125	-47.77	RMS	35.6	11.8	0	-33.02	-33.39	-27	-6.39	-	-	92	225	V
			* 7.48728	-61.65	RMS	35.6	11.8	0	-32.35	-46.6	-41.2	-5.4	-	-	92	225	V
EHT160 (SU Mode)	6985	6	7.125	-52.18	Pk	35.5	11.8	0	-21.7	-26.58	-	-	-7	-19.58	115	187	H
			* 7.484791	-59.83	Pk	35.6	11.8	0	-21	-33.43	-	-	-21.2	-12.23	115	187	H
			7.125	-64.73	RMS	35.5	11.8	0.14	-21.7	-38.99	-27	-11.99	-	-	115	187	H
			* 7.387491	-71.91	RMS	35.5	11.8	0.14	-21	-45.47	-41.2	-4.27	-	-	115	187	H
			7.125	-48.88	Pk	35.5	11.8	0	-21.7	-23.28	-	-	-7	-16.28	70	138	V
			7.132456	-42.69	Pk	35.5	11.8	0	-21.7	-17.09	-	-	-7	-10.09	70	138	V
		5	7.125	-60.38	RMS	35.5	11.8	0.14	-21.7	-34.64	-27	-7.64	-	-	70	138	V
			* 7.450802	-72.4	RMS	35.6	11.8	0.14	-20.7	-45.56	-41.2	-4.36	-	-	70	138	V
			7.125	-52.56	Pk	35.5	11.8	0	-21.7	-26.96	-	-	-7	-19.96	351	109	H
			* 7.483157	-59.73	Pk	35.6	11.8	0	-21	-33.33	-	-	-21.2	-12.13	351	109	H
			7.125	-63.59	RMS	35.5	11.8	0.14	-21.7	-37.85	-27	-10.85	-	-	351	109	H
			* 7.465891	-72.33	RMS	35.6	11.8	0.14	-20.8	-45.59	-41.2	-4.39	-	-	351	109	H
			7.125	-43.95	Pk	35.5	11.8	0	-21.7	-18.35	-	-	-7	-11.35	88	227	V
			7.132223	-41.16	Pk	35.5	11.8	0	-21.7	-15.56	-	-	-7	-8.56	88	227	V
			7.125	-56.87	RMS	35.5	11.8	0.14	-21.7	-31.13	-27	-4.13	-	-	88	227	V
			7.127323	-55.23	RMS	35.5	11.8	0.14	-21.8	-29.59	-27	-2.59	-	-	88	227	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

STATE B

UNI-8 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (SU Mode)	7095	6	7.125	-50.71	Pk	35.5	11.8	0	-32.5	-35.91	-	-	-7	-28.91	271	144	H
			* 7.301235	-54.72	Pk	35.5	11.8	0	-32.3	-39.72	-	-	-21.2	-18.52	271	144	H
			7.125	-64.57	RMS	35.5	11.8	0	-32.5	-49.77	-27	-22.77	-	-	271	144	H
			* 7.496846	-67.04	RMS	35.6	11.8	0	-31.9	-51.54	-41.2	-10.34	-	-	271	144	H
			7.125	-44.41	Pk	35.5	11.8	0	-32.5	-29.61	-	-	-7	-22.61	344	183	V
			7.125223	-39.81	Pk	35.5	11.8	0	-32.5	-25.01	-	-	-7	-18.01	344	183	V
		5	7.125	-61.07	RMS	35.5	11.8	0	-32.5	-46.27	-27	-19.27	-	-	344	183	V
			* 7.416424	-67.14	RMS	35.5	11.8	0	-32.2	-52.04	-41.2	-10.84	-	-	344	183	V
			7.125	-38.83	Pk	35.5	11.8	0	-32.5	-24.03	-	-	-7	-17.03	268	101	H
			7.12569	-38.3	Pk	35.5	11.8	0	-32.5	-23.5	-	-	-7	-16.5	268	101	H
			7.125	-57.34	RMS	35.5	11.8	0	-32.5	-42.54	-27	-15.54	-	-	268	101	H
			* 7.456635	-67.14	RMS	35.6	11.8	0	-32	-51.74	-41.2	-10.54	-	-	268	101	H
			7.125	-34.06	Pk	35.5	11.8	0	-32.5	-19.26	-	-	-7	-12.26	348	211	V
			7.127712	-32.07	Pk	35.5	11.8	0	-32.5	-17.27	-	-	-7	-10.27	348	211	V
			7.125	-51.43	RMS	35.5	11.8	0	-32.5	-36.63	-27	-9.63	-	-	348	211	V
			7.125768	-50.24	RMS	35.5	11.8	0	-32.5	-35.44	-27	-8.44	-	-	348	211	V
EHT40 (SU Mode)	7085	6	7.125	-38.39	Pk	35.5	11.8	0	-32.5	-23.59	-	-	-7	-16.59	262	120	H
			7.126623	-36.98	Pk	35.5	11.8	0	-32.5	-22.18	-	-	-7	-15.18	262	120	H
			7.125	-52.83	RMS	35.5	11.8	0	-32.5	-38.03	-27	-11.03	-	-	262	120	H
			7.125456	-51.86	RMS	35.5	11.8	0	-32.5	-37.06	-27	-10.06	-	-	262	120	H
			7.125	-33.58	Pk	35.5	11.8	0	-32.5	-18.78	-	-	-7	-11.78	345	179	V
			7.125534	-30.31	Pk	35.5	11.8	0	-32.5	-15.51	-	-	-7	-8.51	345	179	V
		5	7.125	-48.02	RMS	35.5	11.8	0	-32.5	-33.22	-27	-6.22	-	-	345	179	V
			7.125145	-46.48	RMS	35.5	11.8	0	-32.5	-31.68	-27	-4.68	-	-	345	179	V
			7.125	-33.21	Pk	35.7	11.8	0	-36.81	-22.52	-	-	-7	-15.52	262	102	H
			7.126545	-30.34	Pk	35.7	11.8	0	-36.8	-19.64	-	-	-7	-12.64	262	102	H
			7.125	-47.18	RMS	35.7	11.8	0	-36.81	-36.49	-27	-9.49	-	-	262	102	H
			7.381268	-59.02	RMS	35.8	11.8	0	-36.73	-48.15	-41.2	-6.95	-	-	262	102	H
			7.125	-26.75	Pk	35.7	11.8	0	-36.81	-16.06	-	-	-7	-9.06	351	165	V
			7.125845	-24.22	Pk	35.7	11.8	0	-36.81	-13.53	-	-	-7	-6.53	351	165	V
			7.125	-40.33	RMS	35.7	11.8	0	-36.81	-29.64	-27	-2.64	-	-	351	165	V
			7.125145	-40.97	RMS	35.7	11.8	0	-36.81	-30.28	-27	-3.28	-	-	351	165	V
EHT80 (SU Mode)	7025	6	7.125	-47.2	Pk	35.6	11.8	0	-33.02	-32.82	-	-	-7	-25.82	39	140	H
			* 7.514813	-49.31	Pk	35.7	11.8	0	-32.4	-34.21	-	-	-21.2	-13.01	39	140	H
			7.125	-58.67	RMS	35.6	11.8	0	-33.02	-44.29	-27	-17.29	-	-	39	140	H
			* 7.507502	-61.74	RMS	35.6	11.8	0	-32.44	-46.78	-41.2	-5.58	-	-	39	140	H
			7.125	-40.43	Pk	35.6	11.8	0	-33.02	-26.05	-	-	-7	-19.05	127	188	V
			* 7.485491	-49.77	Pk	35.6	11.8	0	-32.35	-34.72	-	-	-21.2	-13.52	127	188	V
		5	7.125	-55.78	RMS	35.6	11.8	0	-33.02	-41.4	-27	-14.4	-	-	127	188	V
			* 7.517691	-61.81	RMS	35.7	11.8	0	-32.49	-46.8	-41.2	-5.6	-	-	127	188	V
			7.125	-40.16	Pk	35.7	11.8	0	-36.81	-29.47	-	-	-7	-22.47	238	100	H
			7.296024	-46.77	Pk	35.7	11.8	0	-36.85	-36.12	-	-	-21.2	-14.92	238	100	H
			7.125	-54.01	RMS	35.7	11.8	0	-36.81	-43.32	-27	-16.32	-	-	238	100	H
			7.373179	-58.75	RMS	35.8	11.8	0	-36.73	-47.88	-41.2	-6.68	-	-	238	100	H
			7.125	-33.36	Pk	35.7	11.8	0	-36.81	-22.67	-	-	-7	-15.67	358	146	V
			7.125612	-31.37	Pk	35.7	11.8	0	-36.81	-20.68	-	-	-7	-13.68	358	146	V
			7.125	-47.42	RMS	35.7	11.8	0	-36.81	-36.73	-27	-9.73	-	-	358	146	V
			7.346579	-58.79	RMS	35.8	11.8	0	-36.87	-48.06	-41.2	-6.86	-	-	358	146	V
EHT160 (SU Mode)	6985	6	7.125	-51.29	Pk	35.5	11.8	0	-21.7	-25.69	-	-	-7	-18.69	122	147	H
			* 7.492724	-60.27	Pk	35.6	11.8	0	-21.1	-33.97	-	-	-21.2	-12.77	122	147	H
			7.125	-63.56	RMS	35.5	11.8	0.14	-21.7	-37.82	-27	-10.82	-	-	122	147	H
			* 7.451191	-72.55	RMS	35.6	11.8	0.14	-20.7	-45.71	-41.2	-4.51	-	-	122	147	H
			7.125	-47.68	Pk	35.5	11.8	0	-21.7	-22.08	-	-	-7	-15.08	81	150	V
			7.132145	-42.15	Pk	35.5	11.8	0	-21.7	-16.55	-	-	-7	-9.55	81	150	V
		5	7.125	-59.27	RMS	35.5	11.8	0.14	-21.7	-33.53	-27	-6.53	-	-	81	150	V
			* 7.443257	-72.3	RMS	35.6	11.8	0.14	-20.8	-45.56	-41.2	-4.36	-	-	81	150	V
			7.125	-51.42	Pk	35.5	11.8	0	-21.7	-25.82	-	-	-7	-18.82	347	106	H
			* 7.451735	-60.3	Pk	35.6	11.8	0	-20.7	-33.6	-	-	-21.2	-12.4	347	106	H
			7.125	-63.22	RMS	35.5	11.8	0.14	-21.7	-37.48	-27	-10.48	-	-	347	106	H
			* 7.466902	-72.52	RMS	35.6	11.8	0.14	-20.8	-45.78	-41.2	-4.58	-	-	347	106	H
			7.125	-45.25	Pk	35.5	11.8	0	-21.7	-19.65	-	-	-7	-12.65	45	227	V
			7.132223	-41.65	Pk	35.5	11.8	0	-21.7	-16.05	-	-	-7	-9.05	45	227	V
			7.125	-57.17	RMS	35.5	11.8	0.14	-21.7	-31.43	-27	-4.43	-	-	45	227	V
			7.133001	-55.46	RMS	35.5	11.8	0.14	-21.7	-29.72	-27	-2.72	-	-	45	227	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.2.4. 802.11be SISO PARTIAL RU MODE IN UNII-8 BAND – BANDEDGE**STATE A**

UNII-8 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (RU 26 / Index 8)	7095	6	7.125	-57.39	Pk	35.5	11.8	0	-32.5	-42.59	-	-	-7	-35.59	278	162	H
			* 7.321613	-54.79	Pk	35.5	11.8	0	-32.3	-39.79	-	-	-21.2	-18.59	278	162	H
			7.125	-68.11	RMS	35.5	11.8	0	-32.5	-53.31	-27	-26.31	-	-	278	162	H
			* 7.487824	-67.71	RMS	35.6	11.8	0	-31.9	-52.21	-41.2	-11.01	-	-	278	162	H
			7.125	-56.66	Pk	35.5	11.8	0	-32.5	-41.86	-	-	-7	-34.86	345	159	V
			* 7.520024	-55.02	Pk	35.6	11.8	0	-31.9	-39.52	-	-	-21.2	-18.32	345	159	V
		5	7.125	-68.23	RMS	35.5	11.8	0	-32.5	-53.43	-27	-26.43	-	-	345	159	V
			* 7.492802	-67.53	RMS	35.6	11.8	0	-31.9	-52.03	-41.2	-10.83	-	-	345	159	V
			7.125	-58.15	Pk	35.5	11.8	0	-32.5	-43.35	-	-	-7	-36.35	271	145	H
			* 7.289724	-55.1	Pk	35.5	11.8	0	-32.3	-40.1	-	-	-21.2	-18.9	271	145	H
			7.125	-68.26	RMS	35.5	11.8	0	-32.5	-53.46	-27	-26.46	-	-	271	145	H
			* 7.364002	-67.29	RMS	35.5	11.8	0	-32.2	-52.19	-41.2	-10.99	-	-	271	145	H
			7.125	-56.77	Pk	35.5	11.8	0	-32.5	-41.97	-	-	-7	-34.97	346	229	V
			* 7.343624	-55.12	Pk	35.5	11.8	0	-32.3	-40.12	-	-	-21.2	-18.92	346	229	V
			7.125	-68.23	RMS	35.5	11.8	0	-32.5	-53.43	-27	-26.43	-	-	346	229	V
			* 7.391613	-67.2	RMS	35.5	11.8	0	-32.2	-52.1	-41.2	-10.9	-	-	346	229	V
EHT80 (RU 484+242 / Index 90)	7025	6	7.125	-48.31	Pk	35.7	11.8	0	-36.81	-37.62	-	-	-7	-30.62	275	118	H
			7.342379	-46.49	Pk	35.7	11.8	0	-36.86	-35.85	-	-	-21.2	-14.65	275	118	H
			7.125	-59.38	RMS	35.7	11.8	0	-36.81	-48.69	-27	-21.69	-	-	275	118	H
			7.36929	-58.86	RMS	35.7	11.8	0	-36.77	-48.13	-41.2	-6.93	-	-	275	118	H
			7.125	-48.82	Pk	35.7	11.8	0	-36.81	-38.13	-	-	-7	-31.13	324	124	V
			7.398613	-46.8	Pk	35.7	11.8	0	-36.71	-36.01	-	-	-21.2	-14.81	324	124	V
		5	7.125	-59.74	RMS	35.7	11.8	0	-36.81	-49.05	-27	-22.05	-	-	324	124	V
			7.402268	-58.9	RMS	35.7	11.8	0	-36.67	-48.07	-41.2	-6.87	-	-	324	124	V
			7.125	-50.16	Pk	35.4	11.8	0	-35.8	-38.76	-	-	-7	-31.76	170	111	H
			7.276968	-48.55	Pk	35.4	11.8	0	-35.52	-36.87	-	-	-21.2	-15.67	170	111	H
			7.125	-60.55	RMS	35.4	11.8	0	-35.8	-49.15	-27	-22.15	-	-	170	111	H
			7.452902	-60.38	RMS	35.5	11.8	0	-35.49	-48.57	-41.2	-7.37	-	-	170	111	H
			7.125	-48.63	Pk	35.4	11.8	0	-35.8	-37.23	-	-	-7	-30.23	215	192	V
			7.400791	-47.95	Pk	35.4	11.8	0	-35.39	-36.14	-	-	-21.2	-14.94	215	192	V
			7.125	-59.36	RMS	35.4	11.8	0	-35.8	-47.96	-27	-20.96	-	-	215	192	V
			7.399391	-60.07	RMS	35.4	11.8	0	-35.43	-48.3	-41.2	-7.1	-	-	215	192	V
EHT160 (RU 996+484+242 / Index 96)	6985	6	7.125	-59.33	Pk	35.5	11.8	0	-21.7	-33.73	-	-	-7	-26.73	17	122	H
			* 7.443024	-60.65	Pk	35.6	11.8	0	-20.8	-34.05	-	-	-21.2	-12.85	17	122	H
			7.125	-74.2	RMS	35.5	11.8	0	-21.7	-48.6	-27	-21.6	-	-	17	122	H
			* 7.45578	-72.53	RMS	35.6	11.8	0	-20.7	-45.83	-41.2	-4.63	-	-	17	122	H
			7.125	-55.21	Pk	35.5	11.8	0	-21.7	-29.61	-	-	-7	-22.61	80	105	V
			* 7.495524	-60	Pk	35.6	11.8	0	-21.1	-33.7	-	-	-21.2	-12.5	80	105	V
		5	7.125	-71.57	RMS	35.5	11.8	0	-21.7	-45.97	-27	-18.97	-	-	80	105	V
			* 7.452435	-72.38	RMS	35.6	11.8	0	-20.8	-45.78	-41.2	-4.58	-	-	80	105	V
			7.125	-60.42	Pk	35.5	11.8	0	-21.7	-34.82	-	-	-7	-27.82	351	109	H
			* 7.497313	-60.43	Pk	35.6	11.8	0	-21.1	-34.13	-	-	-21.2	-12.93	351	109	H
			7.125	-72.57	RMS	35.5	11.8	0	-21.7	-46.97	-27	-19.97	-	-	351	109	H
			* 7.460135	-72.34	RMS	35.6	11.8	0	-20.8	-45.74	-41.2	-4.54	-	-	351	109	H
			7.125	-52.72	Pk	35.5	11.8	0	-21.7	-27.12	-	-	-7	-20.12	88	227	V
			7.131912	-44.44	Pk	35.5	11.8	0	-21.7	-18.84	-	-	-7	-11.84	88	227	V
			7.125	-67.16	RMS	35.5	11.8	0	-21.7	-41.56	-27	-14.56	-	-	88	227	V
			* 7.427624	-71.94	RMS	35.5	11.8	0	-21.1	-45.74	-41.2	-4.54	-	-	88	227	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

STATE B

UNII-8 (SISO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (RU 26 / Index 8)	7095	6	7.125	-55.73	Pk	35.5	11.8	0	-32.5	-40.93	-	-	-7	-33.93	32	240	H
			* 7.511469	-55.83	Pk	35.6	11.8	0	-31.9	-40.33	-	-	-21.2	-19.13	32	240	H
			7.125	-68.31	RMS	35.5	11.8	0	-32.5	-53.51	-27	-26.51	-	-	32	240	H
			* 7.488757	-67.52	RMS	35.6	11.8	0	-31.9	-52.02	-41.2	-10.82	-	-	32	240	H
			7.125	-57.11	Pk	35.5	11.8	0	-32.5	-42.31	-	-	-7	-35.31	353	150	V
			* 7.457413	-55.63	Pk	35.6	11.8	0	-32	-40.23	-	-	-21.2	-19.03	353	150	V
		5	7.125	-68.02	RMS	35.5	11.8	0	-32.5	-53.22	-27	-26.22	-	-	353	150	V
			* 7.462313	-67.34	RMS	35.6	11.8	0	-32.1	-52.04	-41.2	-10.84	-	-	353	150	V
			7.125	-56.58	Pk	35.5	11.8	0	-32.5	-41.78	-	-	-7	-34.78	253	108	H
			* 7.50548	-55.5	Pk	35.6	11.8	0	-31.9	-40	-	-	-21.2	-18.8	253	108	H
			7.125	-68.87	RMS	35.5	11.8	0	-32.5	-54.07	-27	-27.07	-	-	253	108	H
			* 7.510224	-67.37	RMS	35.6	11.8	0	-31.9	-51.87	-41.2	-10.67	-	-	253	108	H
			7.125	-57.7	Pk	35.5	11.8	0	-32.5	-42.9	-	-	-7	-35.9	309	172	V
			* 7.516602	-56.13	Pk	35.6	11.8	0	-31.9	-40.63	-	-	-21.2	-19.43	309	172	V
			7.125	-68.38	RMS	35.5	11.8	0	-32.5	-53.58	-27	-26.58	-	-	309	172	V
			* 7.450957	-67.7	RMS	35.6	11.8	0	-32.1	-52.4	-41.2	-11.2	-	-	309	172	V
EHT80 (RU 484+242 / Index 90)	7025	6	7.125	-49.87	Pk	35.4	11.8	0	-35.8	-38.47	-	-	-7	-31.47	266	175	H
			7.474602	-48.46	Pk	35.4	11.8	0	-35.38	-36.64	-	-	-21.2	-15.44	266	175	H
			7.125	-60.56	RMS	35.4	11.8	0	-35.8	-49.16	-27	-22.16	-	-	266	175	H
			7.493891	-60.37	RMS	35.4	11.8	0	-35.32	-48.49	-41.2	-7.29	-	-	266	175	H
			7.125	-47.93	Pk	35.4	11.8	0	-35.8	-36.53	-	-	-7	-29.53	352	148	V
			7.46488	-47.83	Pk	35.4	11.8	0	-35.44	-36.07	-	-	-21.2	-14.87	352	148	V
		5	7.125	-60.47	RMS	35.4	11.8	0	-35.8	-49.07	-27	-22.07	-	-	352	148	V
			7.501824	-60.43	RMS	35.5	11.8	0	-35.29	-48.42	-41.2	-7.22	-	-	352	148	V
			7.125	-50.06	Pk	35.4	11.8	0	-35.8	-38.66	-	-	-7	-31.66	268	102	H
			7.27199	-47.98	Pk	35.4	11.8	0	-35.6	-36.38	-	-	-21.2	-15.18	268	102	H
			7.125	-60.38	RMS	35.4	11.8	0	-35.8	-48.98	-27	-21.98	-	-	268	102	H
			7.45438	-60.33	RMS	35.5	11.8	0	-35.49	-48.52	-41.2	-7.32	-	-	268	102	H
			7.125	-49.13	Pk	35.4	11.8	0	-35.8	-37.73	-	-	-7	-30.73	358	261	V
			7.52158	-48.58	Pk	35.5	11.8	0	-35.26	-36.54	-	-	-21.2	-15.34	358	261	V
			7.125	-59.82	RMS	35.4	11.8	0	-35.8	-48.42	-27	-21.42	-	-	358	261	V
			7.252312	-60.16	RMS	35.4	11.8	0	-35.46	-48.42	-41.2	-7.22	-	-	358	261	V
EHT160 (RU 996+484+242 / Index 96)	6985	6	7.125	-58.94	Pk	35.5	11.8	0	-21.7	-33.34	-	-	-7	-26.34	3	122	H
			* 7.464568	-60.13	Pk	35.6	11.8	0	-20.8	-33.53	-	-	-21.2	-12.33	3	122	H
			7.125	-73.06	RMS	35.5	11.8	0	-21.7	-47.46	-27	-20.46	-	-	3	122	H
			* 7.465502	-72.31	RMS	35.6	11.8	0	-20.8	-45.71	-41.2	-4.51	-	-	3	122	H
			7.125	-53.67	Pk	35.5	11.8	0	-21.7	-28.07	-	-	-7	-21.07	78	161	V
			* 7.407557	-59.92	Pk	35.5	11.8	0	-20.9	-33.52	-	-	-21.2	-12.32	78	161	V
		5	7.125	-70.83	RMS	35.5	11.8	0	-21.7	-45.23	-27	-18.23	-	-	78	161	V
			* 7.441157	-72.41	RMS	35.6	11.8	0	-20.8	-45.81	-41.2	-4.61	-	-	78	161	V
			7.125	-59.28	Pk	35.5	11.8	0	-21.7	-33.68	-	-	-7	-26.68	347	106	H
			* 7.461768	-60.62	Pk	35.6	11.8	0	-20.8	-34.02	-	-	-21.2	-12.82	347	106	H
			7.125	-72.33	RMS	35.5	11.8	0	-21.7	-46.73	-27	-19.73	-	-	347	106	H
			* 7.513724	-71.96	RMS	35.6	11.8	0	-21.2	-45.76	-41.2	-4.56	-	-	347	106	H
			7.125	-53.44	Pk	35.5	11.8	0	-21.7	-27.84	-	-	-7	-20.84	45	227	V
			* 7.491713	-60.23	Pk	35.6	11.8	0	-21.1	-33.93	-	-	-21.2	-12.73	45	227	V
			7.125	-68.95	RMS	35.5	11.8	0	-21.7	-43.35	-27	-16.35	-	-	45	227	V
			* 7.486657	-72.16	RMS	35.6	11.8	0	-21	-45.76	-41.2	-4.56	-	-	45	227	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.2.5. 802.11a MIMO MODE IN UNII-8 BAND – BANDEDGE**STATE A**

UNII-8 (MIMO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11a	7115	6+5	7.125	-28.44	Pk	35.7	11.8	0	-36.81	-17.75	-	-	-7	-10.75	34	201	H
			7.125068	-29.39	Pk	35.7	11.8	0	-36.81	-18.7	-	-	-7	-11.7	34	201	H
			7.125	-45.98	RMS	35.7	11.8	0	-36.81	-35.29	-27	-8.29	-	-	34	201	H
			7.379402	-58.65	RMS	35.8	11.8	0	-36.76	-47.81	-41.2	-6.61	-	-	34	201	H
			7.125	-22.48	Pk	35.7	11.8	0	-36.81	-11.79	-	-	-7	-4.79	348	191	V
			7.125068	-22.86	Pk	35.7	11.8	0	-36.81	-12.17	-	-	-7	-5.17	348	191	V
			7.125	-40.37	RMS	35.7	11.8	0	-36.81	-29.68	-27	-2.68	-	-	348	191	V
			7.125068	-41	RMS	35.7	11.8	0	-36.81	-30.31	-27	-3.31	-	-	348	191	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

STATE B

UNII-8 (MIMO)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11a	7115	6+5	7.125	-29.56	Pk	35.7	11.8	0	-36.81	-18.87	-	-	-7	-11.87	38	353	H
			7.125068	-29.77	Pk	35.7	11.8	0	-36.81	-19.08	-	-	-7	-12.08	38	353	H
			7.125	-47.71	RMS	35.7	11.8	0	-36.81	-37.02	-27	-10.02	-	-	38	353	H
			7.402268	-58.86	RMS	35.7	11.8	0	-36.67	-48.03	-41.2	-6.83	-	-	38	353	H
			7.125	-22.32	Pk	35.7	11.8	0	-36.81	-11.63	-	-	-7	-4.63	358	192	V
			7.125068	-22.74	Pk	35.7	11.8	0	-36.81	-12.05	-	-	-7	-5.05	358	192	V
			7.125	-40.22	RMS	35.7	11.8	0	-36.81	-29.53	-27	-2.53	-	-	358	192	V
			7.125068	-40.44	RMS	35.7	11.8	0	-36.81	-29.75	-27	-2.75	-	-	358	192	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.2.6. 802.11be MIMO SU MODE IN UNII-8 BAND – BANDEDGE**STATE A**

UNII-8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (SU Mode)	7095	6 + 5	7.125	-39.11	Pk	35.6	11.8	0	-33.02	-24.73	-	-	-7	-17.73	54	160	H
			* 7.513958	-49.57	Pk	35.6	11.8	0	-32.39	-34.56	-	-	-21.2	-13.36	54	160	H
			7.125	-55.06	RMS	35.6	11.8	0	-33.02	-40.68	-27	-13.68	-	-	54	160	H
			* 7.507658	-61.66	RMS	35.6	11.8	0	-32.43	-46.69	-41.2	-5.49	-	-	54	160	H
			7.125	-32.62	Pk	35.6	11.8	0	-33.02	-18.24	-	-	-7	-11.24	119	210	V
			7.125379	-29.99	Pk	35.6	11.8	0	-33.02	-15.61	-	-	-7	-8.61	119	210	V
			7.125	-48.29	RMS	35.6	11.8	0	-33.02	-33.91	-27	-6.91	-	-	119	210	V
			* 7.445513	-61.86	RMS	35.6	11.8	0	-32.3	-46.76	-41.2	-5.56	-	-	119	210	V
EHT40 (SU Mode)	7085	6 + 5	7.125	-33.33	Pk	35.5	11.8	0	-36.47	-22.5	-	-	-7	-15.5	23	109	H
			* 7.482146	-47.18	Pk	35.6	11.8	0	-36.36	-36.14	-	-	-21.2	-14.94	23	109	H
			7.125	-49.21	RMS	35.5	11.8	0	-36.47	-38.38	-27	-11.38	-	-	23	109	H
			* 7.523602	-59.96	RMS	35.6	11.8	0	-36.1	-48.66	-41.2	-7.46	-	-	23	109	H
			7.125	-25.9	Pk	35.5	11.8	0	-36.47	-15.07	-	-	-7	-8.07	104	186	V
			7.125145	-23.18	Pk	35.5	11.8	0	-36.46	-12.34	-	-	-7	-5.34	104	186	V
			7.125	-40.98	RMS	35.5	11.8	0	-36.47	-30.15	-27	-3.15	-	-	104	186	V
			7.125145	-40.82	RMS	35.5	11.8	0	-36.46	-29.98	-27	-2.98	-	-	104	186	V
EHT80 (SU Mode)	7025	6 + 5	7125	-45.83	Pk	35.8	11.8	0	-32.8	-31.03	-	-	-7	-24.03	293	357	H
			* 7408.724	-52.29	Pk	35.7	11.8	0	-32.6	-37.39	-	-	-21.2	-16.19	293	357	H
			7125	-61.38	RMS	35.8	11.8	0	-32.8	-46.58	-27	-19.58	-	-	293	357	H
			* 7452.746	-64.6	RMS	35.7	11.8	0	-32.6	-49.7	-41.2	-8.5	-	-	293	357	H
			7125	-44.13	Pk	35.8	11.8	0	-32.8	-29.33	-	-	-7	-22.33	250	334	V
			* 7483.235	-52.52	Pk	35.7	11.8	0	-32.5	-37.52	-	-	-21.2	-16.32	250	334	V
			7125	-58.11	RMS	35.8	11.8	0	-32.8	-43.31	-27	-16.31	-	-	250	334	V
			* 7412.613	-64.71	RMS	35.7	11.8	0	-32.6	-49.81	-41.2	-8.61	-	-	250	334	V
EHT160 (SU Mode)	6985	6 + 5	7.125	-49.5	Pk	35.5	11.8	0	-21.7	-23.9	-	-	-7	-16.9	2	106	H
			* 7.446135	-60.15	Pk	35.6	11.8	0	-20.9	-33.65	-	-	-21.2	-12.45	2	106	H
			7.125	-62.88	RMS	35.5	11.8	0.14	-21.7	-37.14	-27	-10.14	-	-	2	106	H
			* 7.524069	-72.08	RMS	35.6	11.8	0.14	-21.2	-45.74	-41.2	-4.54	-	-	2	106	H
			7.125	-45.98	Pk	35.5	11.8	0	-21.7	-20.38	-	-	-7	-13.38	38	171	V
			7.134556	-41.34	Pk	35.5	11.8	0	-21.7	-15.74	-	-	-7	-8.74	38	171	V
			7.125	-57.66	RMS	35.5	11.8	0.14	-21.7	-31.92	-27	-4.92	-	-	38	171	V
			7.133934	-56.02	RMS	35.5	11.8	0.14	-21.7	-30.28	-27	-3.28	-	-	38	171	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

STATE B

UNII-8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (SU Mode)	7095	6 + 5	7.125	-36.34	Pk	35.5	11.8	0	-32.5	-21.54	-	-	-7	-14.54	254	117	H
			7.125068	-36.14	Pk	35.5	11.8	0	-32.5	-21.34	-	-	-7	-14.34	254	117	H
			7.125	-53.21	RMS	35.5	11.8	0	-32.5	-38.41	-27	-11.41	-	-	254	117	H
			* 7.385702	-66.9	RMS	35.5	11.8	0	-32.2	-51.8	-41.2	-10.6	-	-	254	117	H
			7.125	-31.39	Pk	35.5	11.8	0	-32.5	-16.59	-	-	-7	-9.59	340	156	V
			7.127323	-31.26	Pk	35.5	11.8	0	-32.5	-16.46	-	-	-7	-9.46	340	156	V
			7.125	-47.89	RMS	35.5	11.8	0	-32.5	-33.09	-27	-6.09	-	-	340	156	V
			7.125145	-47.58	RMS	35.5	11.8	0	-32.5	-32.78	-27	-5.78	-	-	340	156	V
			7.125	-48.27	Pk	35.7	11.8	0	-22.76	-23.53	-	-	-7	-16.53	328	165	H
			7.129734	-45.83	Pk	35.7	11.8	0	-22.82	-21.15	-	-	-7	-14.15	328	165	H
EHT40 (SU Mode)	7085	6 + 5	7.125	-61.66	RMS	35.7	11.8	0	-22.76	-36.92	-27	-9.92	-	-	328	165	H
			* 7.521735	-73.38	RMS	35.7	11.8	0	-22.08	-47.96	-41.2	-6.76	-	-	328	165	H
			7.125	-44.1	Pk	35.7	11.8	0	-22.76	-19.36	-	-	-7	-12.36	38	166	V
			7.126701	-38.13	Pk	35.7	11.8	0	-22.8	-13.43	-	-	-7	-6.43	38	166	V
			7.125	-58.02	RMS	35.7	11.8	0	-22.76	-33.28	-27	-6.28	-	-	38	166	V
			7.126545	-54.44	RMS	35.7	11.8	0	-22.8	-29.74	-27	-2.74	-	-	38	166	V
			7.125	-37.36	Pk	35.6	11.8	0	-33.02	-22.98	-	-	-7	-15.98	41	114	H
			* 7.448857	-50.02	Pk	35.6	11.8	0	-32.44	-35.06	-	-	-21.2	-13.86	41	114	H
			7.125	-51.6	RMS	35.6	11.8	0	-33.02	-37.22	-27	-10.22	-	-	41	114	H
			* 7.444346	-61.96	RMS	35.6	11.8	0	-32.28	-46.84	-41.2	-5.64	-	-	41	114	H
EHT80 (SU Mode)	7025	6 + 5	7.125	-32.87	Pk	35.6	11.8	0	-33.02	-18.49	-	-	-7	-11.49	72	183	V
			7.129345	-31.08	Pk	35.6	11.8	0	-32.96	-16.64	-	-	-7	-9.64	72	183	V
			7.125	-46.29	RMS	35.6	11.8	0	-33.02	-31.91	-27	-4.91	-	-	72	183	V
			7.125068	-45.95	RMS	35.6	11.8	0	-33.02	-31.57	-27	-4.57	-	-	72	183	V
			7.125	-54.77	Pk	35.5	11.8	0	-21.7	-29.17	-	-	-7	-22.17	123	212	H
			* 7.517302	-60.21	Pk	35.6	11.8	0	-21.1	-33.91	-	-	-21.2	-12.71	123	212	H
			7.125	-66.9	RMS	35.5	11.8	0.14	-21.7	-41.16	-27	-14.16	-	-	123	212	H
			* 7.460291	-72.46	RMS	35.6	11.8	0.14	-20.8	-45.72	-41.2	-4.52	-	-	123	212	H
			7.125	-44.42	Pk	35.5	11.8	0	-21.7	-18.82	-	-	-7	-11.82	98	177	V
			7.130356	-40.8	Pk	35.5	11.8	0	-21.7	-15.2	-	-	-7	-8.2	98	177	V
EHT160 (SU Mode)	6985	6 + 5	7.125	-56.76	RMS	35.5	11.8	0.14	-21.7	-31.02	-27	-4.02	-	-	98	177	V
			7.130279	-55.31	RMS	35.5	11.8	0.14	-21.7	-29.57	-27	-2.57	-	-	98	177	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

1.2.7. 802.11be MIMO PARTIAL RU MODE IN UNII-8 BAND – BANDEDGE**STATE A**

UNII-8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (RU 26 / Index 8)	7095	6 + 5	7.125	-57.57	Pk	35.5	11.8	0	-32.5	-42.77	-	-	-7	-35.77	277	119	H
			* 7.464646	-54.59	Pk	35.6	11.8	0	-32.1	-39.29	-	-	-21.2	-18.09	277	119	H
			7.125	-68.25	RMS	35.5	11.8	0	-32.5	-53.45	-27	-26.45	-	-	277	119	H
			* 7.459046	-67.37	RMS	35.6	11.8	0	-32	-51.97	-41.2	-10.77	-	-	277	119	H
			7.125	-53.2	Pk	35.5	11.8	0	-32.5	-38.4	-	-	-7	-31.4	355	153	V
			* 7.325579	-54.83	Pk	35.5	11.8	0	-32.2	-39.73	-	-	-21.2	-18.53	355	153	V
			7.125	-67.35	RMS	35.5	11.8	0	-32.5	-52.55	-27	-25.55	-	-	355	153	V
			* 7.501046	-67.61	RMS	35.6	11.8	0	-31.8	-52.01	-41.2	-10.81	-	-	355	153	V
EHT80 (RU 484+242 / Index 90)	7025	6 + 5	7.125	-49.29	Pk	35.4	11.8	0	-35.8	-37.89	-	-	-7	-30.89	2	109	H
			7.480202	-48.29	Pk	35.4	11.8	0	-35.38	-36.47	-	-	-21.2	-15.27	2	109	H
			7.125	-60.42	RMS	35.4	11.8	0	-35.8	-49.02	-27	-22.02	-	-	2	109	H
			7.253479	-60.19	RMS	35.4	11.8	0	-35.47	-48.46	-41.2	-7.26	-	-	2	109	H
			7.125	-48.52	Pk	35.4	11.8	0	-35.8	-37.12	-	-	-7	-30.12	86	229	V
			7.351402	-47.36	Pk	35.4	11.8	0	-35.62	-35.78	-	-	-21.2	-14.58	86	229	V
			7.125	-59.62	RMS	35.4	11.8	0	-35.8	-48.22	-27	-21.22	-	-	86	229	V
			7.471413	-60.05	RMS	35.4	11.8	0	-35.38	-48.23	-41.2	-7.03	-	-	86	229	V
EHT160 (RU 996+484 / Index 94)	6985	6 + 5	7.125	-58.77	Pk	35.5	11.8	0	-21.7	-33.17	-	-	-7	-26.17	2	106	H
			* 7.454224	-59.03	Pk	35.6	11.8	0	-20.7	-32.33	-	-	-21.2	-11.13	2	106	H
			7.125	-72.2	RMS	35.5	11.8	0	-21.7	-46.6	-27	-19.6	-	-	2	106	H
			* 7.521191	-72.02	RMS	35.6	11.8	0	-21.2	-45.82	-41.2	-4.62	-	-	2	106	H
			7.125	-53.1	Pk	35.5	11.8	0	-21.7	-27.5	-	-	-7	-20.5	38	171	V
			* 7.506646	-60.35	Pk	35.6	11.8	0	-21.2	-34.15	-	-	-21.2	-12.95	38	171	V
			7.125	-66.09	RMS	35.5	11.8	0	-21.7	-40.49	-27	-13.49	-	-	38	171	V
			* 7.411291	-72.15	RMS	35.5	11.8	0	-21	-45.85	-41.2	-4.65	-	-	38	171	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

STATE B

UNII-8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBm)	Det	AF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Correct Reading EIRP (dBm)	Avg Limit (dBm)	Avg Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
EHT20 (RU 26 / Index 8)	7095	6 + 5	7.125	-58.06	Pk	35.5	11.8	0	-32.5	-43.26	-	-	-7	-36.26	264	101	H
			* 7.49848	-55.78	Pk	35.6	11.8	0	-31.8	-40.18	-	-	-21.2	-18.98	264	101	H
			7.125	-68.33	RMS	35.5	11.8	0	-32.5	-53.53	-27	-26.53	-	-	264	101	H
			* 7.499335	-67.68	RMS	35.6	11.8	0	-31.8	-52.08	-41.2	-10.88	-	-	264	101	H
			7.125	-54.97	Pk	35.5	11.8	0	-32.5	-40.17	-	-	-7	-33.17	8	156	V
			* 7.347435	-54.71	Pk	35.5	11.8	0	-32.3	-39.71	-	-	-21.2	-18.51	8	156	V
			7.125	-66.96	RMS	35.5	11.8	0	-32.5	-52.16	-27	-25.16	-	-	8	156	V
			* 7.320213	-66.8	RMS	35.5	11.8	0	-32.3	-51.8	-41.2	-10.6	-	-	8	156	V
EHT80 (RU 484+242 / Index 90)	7025	6 + 5	7.125	-50.03	Pk	35.7	11.8	0	-37.4	-39.93	-	-	-7	-32.93	143	274	H
			7.441002	-46.67	Pk	35.7	11.8	0	-37.8	-36.97	-	-	-21.2	-15.77	143	274	H
			7.125	-60.2	RMS	35.7	11.8	0	-37.4	-50.1	-27	-23.1	-	-	143	274	H
			7.52158	-58.91	RMS	35.7	11.8	0	-37.8	-49.21	-41.2	-8.01	-	-	143	274	H
			7.125	-46.89	Pk	35.7	11.8	0	-37.4	-36.79	-	-	-7	-29.79	228	181	V
			7.287624	-47	Pk	35.6	11.8	0	-37.4	-37	-	-	-21.2	-15.8	228	181	V
			7.125	-57.91	RMS	35.7	11.8	0	-37.4	-47.81	-27	-20.81	-	-	228	181	V
			7.271212	-59.07	RMS	35.6	11.8	0	-37.4	-49.07	-41.2	-7.87	-	-	228	181	V
EHT160 (RU 996+484 / Index 94)	6985	6 + 5	7.125	-59.11	Pk	35.5	11.8	0	-21.7	-33.51	-	-	-7	-26.51	123	212	H
			* 7.508746	-59.97	Pk	35.6	11.8	0	-21.2	-33.77	-	-	-21.2	-12.57	123	212	H
			7.125	-71.35	RMS	35.5	11.8	0	-21.7	-45.75	-27	-18.75	-	-	123	212	H
			* 7.454691	-72.33	RMS	35.6	11.8	0	-20.7	-45.63	-41.2	-4.43	-	-	123	212	H
			7.125	-55.17	Pk	35.5	11.8	0	-21.7	-29.57	-	-	-7	-22.57	98	177	V
			* 7.498713	-59.53	Pk	35.6	11.8	0	-21.1	-33.23	-	-	-21.2	-12.03	98	177	V
			7.125	-68.04	RMS	35.5	11.8	0	-21.7	-42.44	-27	-15.44	-	-	98	177	V
			* 7.460913	-72.54	RMS	35.6	11.8	0	-20.8	-45.94	-41.2	-4.74	-	-	98	177	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector


RMS - RMS detection

WORST-CASE BANDEDGE (HIGH CHANNEL)

STATE A

802.11be EHT160 / 207 & 6985MHz / ANT 5 / SU:

VERTICAL RESULT

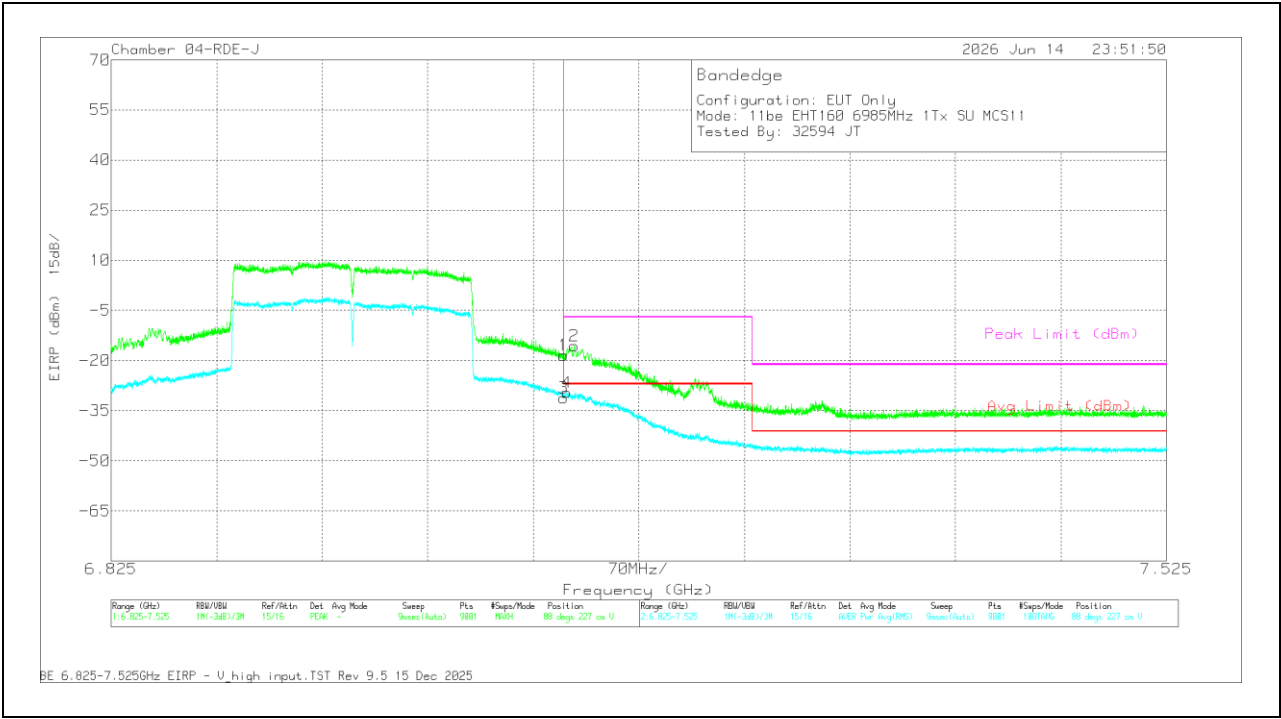


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	80707 ACF (dB/m)	Amp/Cbl (dB)	Conversion Factor (dB)	DCCF (dB)	Corrected Reading EIRP (dBm)	Avg Limit (dBm)	RMS Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.125	-43.95	Pk	35.5	-21.7	11.8	0	-18.35	-	-	-7	-11.35	88	227	V
2	7.132223	-41.16	Pk	35.5	-21.7	11.8	0	-15.56	-	-	-7	-8.56	88	227	V
3	7.125	-56.87	RMS	35.5	-21.7	11.8	.14	-31.13	-27	-4.13	-	-	88	227	V
4	7.127323	-55.23	RMS	35.5	-21.8	11.8	.14	-29.59	-27	-2.59	-	-	88	227	V

Pk - Peak detector
RMS - RMS detection

STATE B
802.11a / 233 & 7115MHz / 2TX CDD:

VERTICAL RESULT

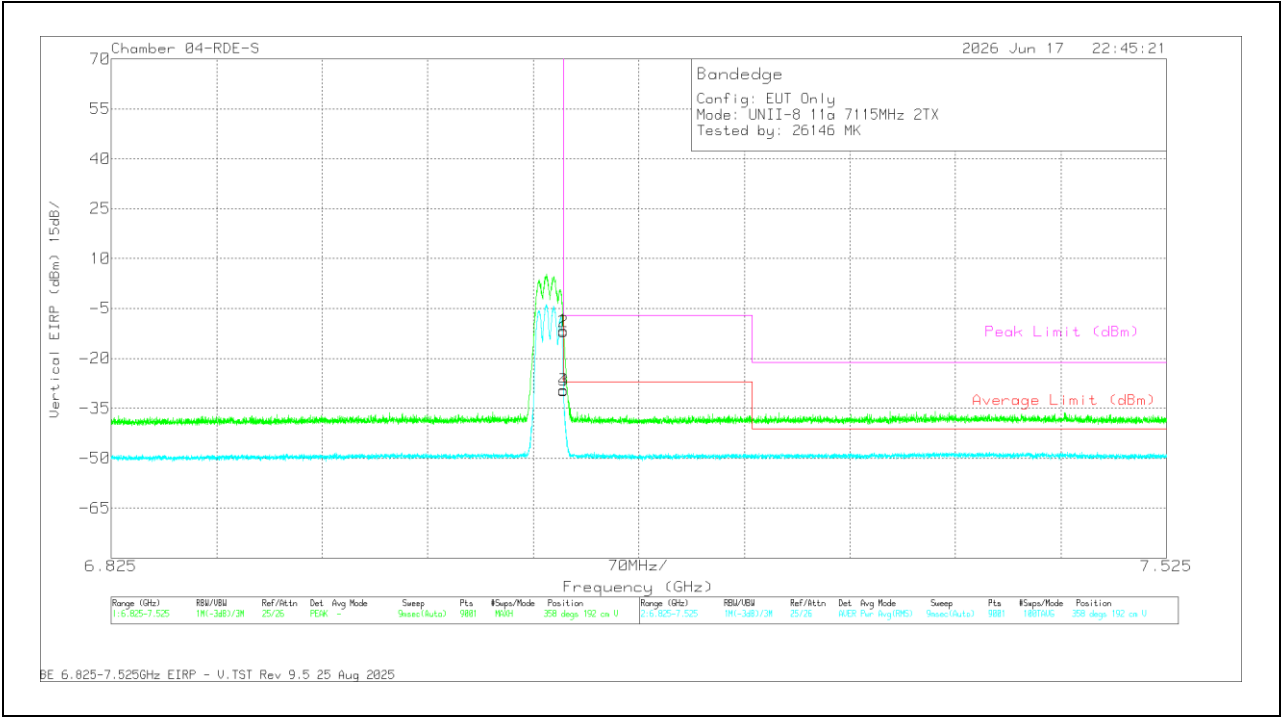

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	200785 ACF (dB/m)	Conversion Factor (dB)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Average Limit (dBm)	Margin (dB)	Peak Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.125	-22.32	Pk	35.7	11.8	0	-36.81	-11.63	-	-	-7	-4.63	358	192	V
2	7.125068	-22.74	Pk	35.7	11.8	0	-36.81	-12.05	-	-	-7	-5.05	358	192	V
3	7.125	-40.22	RMS	35.7	11.8	0	-36.81	-29.53	-27	-2.53	-	-	358	192	V
4	7.125068	-40.44	RMS	35.7	11.8	0	-36.81	-29.75	-27	-2.75	-	-	358	192	V

Pk - Peak detector
RMS - RMS detection

1.2.8. 802.11a MIMO MODE IN UNII-8 BAND – SPURIOUS EMISSIONS**STATE A****20MHz**

UNII-8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11a mode	7115	6 + 5	3.091943	58.47	PK-U	33.1	-47.51	0	44.06	-	-	88.2	-44.14	360	101	H
			3.092637	46.87	ADR	33.1	-47.56	0	32.41	68.2	-35.79	-	-	360	101	H
			3.089971	58.43	PK-U	33.1	-47.6	0	43.93	-	-	88.2	-44.27	360	200	V
			3.105494	46.98	ADR	33.1	-47.5	0	32.58	68.2	-35.62	-	-	360	200	V
			10.060469	56.51	PK-U	37.4	-45.25	0	48.66	-	-	88.2	-39.54	360	200	H
			10.069876	44.79	ADR	37.4	-45.3	0	36.89	68.2	-31.31	-	-	360	200	H
			10.067084	56.47	PK-U	37.4	-45.2	0	48.67	-	-	88.2	-39.53	360	200	V
			10.068408	44.82	ADR	37.4	-45.24	0	36.98	68.2	-31.22	-	-	360	200	V
			17.015673	54.23	PK-U	41.3	-40.8	0	54.73	-	-	88.2	-33.47	360	200	H
			16.987559	42.3	ADR	41.3	-40.96	0	42.64	68.2	-25.56	-	-	360	200	H
			16.991863	54.06	PK-U	41.3	-40.9	0	54.46	-	-	88.2	-33.74	360	200	V
			17.001346	42.2	ADR	41.4	-40.93	0	42.67	68.2	-25.53	-	-	360	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

STATE B**20MHz**

UNII-8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11a mode	7115	6 + 5	3.545781	55.6	PK-U	33	-45.07	0	43.53	-	-	88.2	-44.67	360	200	H
			3.573436	43.56	ADR	33.1	-45.02	0	31.64	68.2	-36.56	-	-	360	200	H
			3.552116	55.62	PK-U	33.1	-45.15	0	43.57	-	-	88.2	-44.63	360	200	V
			3.569621	43.66	ADR	33.1	-45.08	0	31.68	68.2	-36.52	-	-	360	200	V
			14.234335	54.98	PK-U	39.2	-42.89	0	51.29	-	-	88.2	-36.91	360	200	H
			14.206038	43.08	ADR	39.2	-43	0	39.28	68.2	-28.92	-	-	360	200	H
			14.220169	54.65	PK-U	39.2	-42.94	0	50.91	-	-	88.2	-37.29	360	101	V
			14.231148	43.05	ADR	39.2	-42.9	0	39.35	68.2	-28.85	-	-	360	101	V
			17.651778	52.97	PK-U	41.6	-39.52	0	55.05	-	-	88.2	-33.15	360	200	H
			17.658285	41	ADR	41.6	-39.86	0	42.74	68.2	-25.46	-	-	360	200	H
			17.667004	53.47	PK-U	41.6	-39.82	0	55.25	-	-	88.2	-32.95	360	101	V
			17.668364	41.03	ADR	41.6	-39.86	0	42.77	68.2	-25.43	-	-	360	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.2.9. 802.11be MIMO MODE – SPURIOUS EMISSIONS

20MHz

STATE A

UNII-5-8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	6115 (Low Channel)	6 + 5	2.984205	59.58	PK-U	32.8	-48.1	0	44.28	-	-	88.2	-43.92	1	101	H
			2.991231	47.7	ADR	32.8	-48.08	0	32.42	68.2	-35.78	-	-	1	101	H
			2.980703	59.34	PK-U	32.8	-48.1	0	44.04	-	-	88.2	-44.16	1	101	V
			2.964447	47.56	ADR	32.7	-48	0	32.26	68.2	-35.94	-	-	1	101	V
			10.012372	55.99	PK-U	37.4	-45.3	0	48.09	-	-	88.2	-40.11	1	199	H
			10.037126	44.52	ADR	37.4	-45.1	0	36.82	68.2	-31.38	-	-	1	199	H
			10.022415	56.07	PK-U	37.4	-45.04	0	48.43	-	-	88.2	-39.77	1	200	V
			10.040325	44.48	ADR	37.4	-45.3	0	36.58	68.2	-31.62	-	-	1	200	V
			17.081181	53.98	PK-U	41.4	-40.6	0	54.78	-	-	88.2	-33.42	1	101	H
			17.086465	41.96	ADR	41.4	-40.55	0	42.81	68.2	-25.39	-	-	1	101	H
			17.055576	53.37	PK-U	41.4	-40.6	0	54.17	-	-	88.2	-34.03	1	200	V
			17.05678	41.93	ADR	41.4	-40.6	0	42.73	68.2	-25.47	-	-	1	200	V
	6535 (Mid Channel)	6 + 5	* 2.265806	58.15	PK-U	32.1	-47.63	0	42.62	-	-	74	-31.38	360	101	H
			* 2.265509	46.47	ADR	32.1	-47.63	0	30.94	54	-23.06	-	-	360	101	H
			* 2.271326	58.17	PK-U	32.1	-47.62	0	42.65	-	-	74	-31.35	360	101	V
			* 2.261473	46.33	ADR	32.1	-47.63	0	30.8	54	-23.2	-	-	360	101	V
			* 4.179044	56.14	PK-U	33.8	-45.12	0	44.82	-	-	74	-29.18	360	101	H
			* 4.17376	44.48	ADR	33.8	-45.07	0	33.21	54	-20.79	-	-	360	101	H
			* 4.174494	44.45	ADR	33.8	-45.08	0	33.17	54	-20.83	-	-	360	101	V
			* 4.178663	56.17	PK-U	33.8	-45.12	0	44.85	-	-	74	-29.15	360	101	V
			* 15.861816	54.6	PK-U	40.6	-41.1	0	54.1	-	-	74	-19.9	360	101	H
			* 15.858916	42.66	ADR	40.6	-41.02	0	42.24	54	-11.76	-	-	360	101	H
			* 15.862276	54.25	PK-U	40.6	-41.1	0	53.75	-	-	74	-20.25	360	101	V
			* 15.862572	42.83	ADR	40.6	-41.11	0	42.32	54	-11.68	-	-	360	101	V
			* 2.248558	58.01	PK-U	32.2	-47.6	0	42.61	-	-	74	-31.39	360	101	H
			* 2.247158	46.4	ADR	32.2	-47.6	0	31	54	-23	-	-	360	101	H
	7095 (High Channel)	6 + 5	* 2.259097	58.3	PK-U	32.1	-47.64	0	42.76	-	-	74	-31.24	360	101	V
			* 2.251031	46.45	ADR	32.2	-47.61	0	31.04	54	-22.96	-	-	360	101	V
			* 4.086666	56.97	PK-U	33.7	-45.39	0	45.28	-	-	74	-28.72	360	101	H
			* 4.067717	44.41	ADR	33.6	-45.29	0	32.72	54	-21.28	-	-	360	101	H
			* 4.066724	56.55	PK-U	33.6	-45.3	0	44.85	-	-	74	-29.15	360	101	V
			* 4.07419	44.35	ADR	33.6	-45.42	0	32.53	54	-21.47	-	-	360	101	V
			* 15.868855	54.54	PK-U	40.6	-41.2	0	53.94	-	-	74	-20.06	360	101	H
			* 15.888585	42.55	ADR	40.7	-41.3	0	41.95	54	-12.05	-	-	360	101	H
			* 15.889549	54.29	PK-U	40.7	-41.29	0	53.7	-	-	74	-20.3	360	101	V
			* 15.870911	42.5	ADR	40.6	-41.2	0	41.9	54	-12.1	-	-	360	101	V
11be (RU26 Mode / Highest PSD)	6115 (RU26-0) (Low Channel)	6 + 5	2.989635	58.98	PK-U	32.8	-48.1	0	43.68	-	-	88.2	-44.52	1	199	H
			2.990261	47.57	ADR	32.8	-48.1	0	32.27	68.2	-35.93	-	-	1	199	H
			2.987849	59.26	PK-U	32.8	-48.1	0	43.96	-	-	88.2	-44.24	1	101	V
			2.988209	47.45	ADR	32.8	-48.1	0	32.15	68.2	-36.05	-	-	1	101	V
			9.983373	57.3	PK-U	37.3	-45.24	0	49.36	-	-	88.2	-38.84	1	199	H
			10.005443	44.6	ADR	37.4	-45.2	0	36.8	68.2	-31.4	-	-	1	199	H
			17.055094	53.68	PK-U	41.4	-40.6	0	54.48	-	-	88.2	-33.72	1	199	H
			17.057218	41.94	ADR	41.4	-40.6	0	42.74	68.2	-25.46	-	-	1	199	H
			9.991816	56.23	PK-U	37.4	-45.2	0	48.43	-	-	88.2	-39.77	1	199	V
			9.986413	44.49	ADR	37.3	-45.3	0	36.49	68.2	-31.71	-	-	1	199	V
			17.055846	53.48	PK-U	41.4	-40.6	0	54.28	-	-	88.2	-33.92	1	199	V
			17.051575	41.92	ADR	41.4	-40.6	0	42.72	68.2	-25.48	-	-	1	199	V
	6535 (RU26-0) (Mid Channel)	6 + 5	* 2.260566	62.12	PK-U	31.5	-50	0	43.62	-	-	74	-30.38	360	101	H
			* 2.248478	49.9	ADR	31.5	-50.2	0	31.2	54	-22.8	-	-	360	101	H
			* 2.256344	61.48	PK-U	31.5	-50.23	0	42.75	-	-	74	-31.25	360	101	V
			* 2.25126	49.83	ADR	31.5	-50.1	0	31.23	54	-22.77	-	-	360	101	V
			* 4.011666	59.08	PK-U	33.5	-48	0	44.58	-	-	74	-29.42	360	101	H
			* 4.008849	47.28	ADR	33.5	-48.02	0	32.76	54	-21.24	-	-	360	101	H
			* 4.011783	58.48	PK-U	33.5	-48	0	43.98	-	-	74	-30.02	360	101	V
			* 4.00953	47.41	ADR	33.5	-48	0	32.91	54	-21.09	-	-	360	101	V
			* 16.000767	59.47	PK-U	40.8	-45.95	0	54.32	-	-	74	-19.68	360	101	H
			* 16.007475	47.59	ADR	40.8	-45.61	0	42.78	54	-11.22	-	-	360	101	H
			* 16.008911	59.37	PK-U	40.8	-45.96	0	54.21	-	-	74	-19.79	360	101	V
			* 16.002583	47.69	ADR	40.8	-45.77	0	42.72	54	-11.28	-	-	360	101	V
	7095 (RU26-8) (High Channel)	6 + 5	3.116353	57.86	PK-U	33.2	-47.5	0	43.56	-	-	88.2	-44.64	0	200	H
			3.119357	46.3	ADR	33.2	-47.5	0	32	68.2	-36.2	-	-	0	200	H
			3.120739	58.04	PK-U	33.2	-47.5	0	43.74	-	-	88.2	-44.46	0	200	V
			3.120686	46.51	ADR	33.2	-47.5	0	32.21	68.2	-35.99	-	-	0	200	V
			10.040477	55.85	PK-U	37.4	-45.3	0	47.95	-	-	88.2	-40.25	0	101	H
			10.011232	44.33	ADR	37.4	-45.3	0	36.43	68.2	-31.77	-	-	0	101	H
			10.011672	56.32	PK-U	37.4	-45.3	0	48.42	-	-	88.2	-39.78	0	101	V
			10.004797	44.4	ADR	37.4	-45.2	0	36.6	68.2	-31.6	-	-	0	101	V
			17.032016	53.73	PK-U	41.4	-40.8	0	54.33	-	-	88.2	-33.87	0	200	H
			17.050239	41.74	ADR	41.4	-40.6	0	42.54	68.2	-25.66	-	-	0	200	H
			17.049999	53.23	PK-U	41.4	-40.6	0	54.03	-	-	88.2	-34.17	0	101	V
			17.047983	41.94	ADR	41.4	-40.7	0	42.64	68.2	-25.56	-	-	0	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

STATE B

UNII-5-8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cb/F ltr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	6115 (Low Channel)	6 + 5	3.051952	55.87	PK-U	33	-45.62	0	43.25	-	-	88.2	-44.95	360	101	H
			3.073963	44.2	ADR	33	-45.53	0	31.67	68.2	-36.53	-	-	360	101	H
			3.068046	56.12	PK-U	33	-45.56	0	43.56	-	-	88.2	-44.64	360	101	V
			3.078093	44.31	ADR	33	-45.48	0	31.83	68.2	-36.37	-	-	360	101	V
			* 12.245491	53.43	PK-U	38.9	-41.91	0	50.42	-	-	74	-23.58	360	101	H
			* 12.244311	41.97	ADR	38.9	-41.9	0	38.97	54	-15.03	-	-	360	101	H
			* 12.250143	53.72	PK-U	38.9	-41.9	0	50.72	-	-	74	-23.28	360	101	V
			* 12.211906	41.85	ADR	38.9	-41.72	0	39.03	54	-14.97	-	-	360	101	V
			17.604548	53.25	PK-U	41.6	-39.59	0	55.26	-	-	88.2	-32.94	360	200	H
			17.589253	41.67	ADR	41.6	-39.8	0	43.47	68.2	-24.73	-	-	360	200	H
			17.603972	53.79	PK-U	41.6	-39.6	0	55.79	-	-	88.2	-32.41	360	101	V
			17.597452	41.55	ADR	41.6	-39.82	0	43.33	68.2	-24.87	-	-	360	101	V
	6535 (Mid Channel)	6 + 5	* 2.258042	57.93	PK-U	32.2	-47.65	0	42.48	-	-	74	-31.52	360	101	H
			* 2.250336	46.43	ADR	32.2	-47.62	0	31.01	54	-22.99	-	-	360	101	H
			* 2.256942	58.8	PK-U	32.2	-47.63	0	43.37	-	-	74	-30.63	360	101	V
			* 2.251773	46.45	ADR	32.2	-47.62	0	31.03	54	-22.97	-	-	360	101	V
			* 4.323159	55.93	PK-U	34.2	-45.28	0	44.85	-	-	74	-29.15	360	101	H
			* 4.326701	44.3	ADR	34.2	-45.35	0	33.15	54	-20.85	-	-	360	101	H
			* 4.311225	56.34	PK-U	34.2	-45.25	0	45.29	-	-	74	-28.71	360	101	V
			* 4.311954	44.13	ADR	34.2	-45.25	0	33.08	54	-20.92	-	-	360	101	V
			* 15.902121	54.25	PK-U	40.7	-41.27	0	53.68	-	-	74	-20.32	360	101	H
			* 15.887558	42.44	ADR	40.7	-41.31	0	41.83	54	-12.17	-	-	360	101	H
			* 15.885703	54.37	PK-U	40.7	-41.32	0	53.75	-	-	74	-20.25	360	101	V
			* 15.89253	42.39	ADR	40.7	-41.34	0	41.75	54	-12.25	-	-	360	101	V
	7095 (High Channel)	6 + 5	* 2.230637	58.17	PK-U	32.1	-47.5	0	42.77	-	-	74	-31.23	360	101	H
			* 2.249821	46.37	ADR	32.2	-47.62	0	30.95	54	-23.05	-	-	360	101	H
			* 2.257274	58.03	PK-U	32.2	-47.64	0	42.59	-	-	74	-31.41	360	101	V
			* 2.251755	46.37	ADR	32.2	-47.62	0	30.95	54	-23.05	-	-	360	101	V
			* 3.864427	55.75	PK-U	33.5	-44.85	0	44.4	-	-	74	-29.6	360	101	H
			* 3.84758	43.89	ADR	33.4	-44.99	0	32.3	54	-21.7	-	-	360	101	H
			* 3.845093	55.35	PK-U	33.4	-45.1	0	43.65	-	-	74	-30.35	360	101	V
			* 3.852661	43.78	ADR	33.5	-44.94	0	32.34	54	-21.66	-	-	360	101	V
			* 16.007615	53.81	PK-U	40.9	-41.24	0	53.47	-	-	74	-20.53	360	101	H
			* 15.99794	42.16	ADR	40.8	-41.36	0	41.6	54	-12.4	-	-	360	101	H
			* 16.004771	53.55	PK-U	40.9	-41.34	0	53.11	-	-	74	-20.89	360	101	V
			* 15.998716	42.18	ADR	40.8	-41.35	0	41.63	54	-12.37	-	-	360	101	V
11be (RU26 Mode / Highest PSD)	6115 (RU26-0) (Low Channel)	6 + 5	3.05143	55.52	PK-U	33	-45.62	0	42.9	-	-	88.2	-45.3	360	101	H
			3.044658	44.02	ADR	33	-45.59	0	31.43	68.2	-36.77	-	-	360	101	H
			3.039077	56.12	PK-U	33	-45.61	0	43.51	-	-	88.2	-44.69	360	200	V
			3.040424	44.21	ADR	33	-45.62	0	31.59	68.2	-36.61	-	-	360	200	V
			* 12.225377	53.62	PK-U	38.9	-41.82	0	50.7	-	-	74	-23.3	360	101	H
			* 12.226901	41.94	ADR	38.9	-41.83	0	39.01	54	-14.99	-	-	360	101	H
			* 12.241235	53.83	PK-U	38.9	-41.86	0	50.87	-	-	74	-23.13	360	200	V
			* 12.211066	42.02	ADR	38.9	-41.7	0	39.22	54	-14.78	-	-	360	200	V
			* 16.049297	53.93	PK-U	40.9	-41.17	0	53.66	-	-	74	-20.34	360	200	H
			* 16.049773	42.08	ADR	40.9	-41.18	0	41.8	54	-12.2	-	-	360	200	H
			* 16.059908	53.8	PK-U	40.9	-41.06	0	53.64	-	-	74	-20.36	360	200	V
			* 16.033919	42.13	ADR	40.9	-41.25	0	41.78	54	-12.22	-	-	360	200	V
	6535 (RU26-0) (Mid Channel)	6 + 5	2.165518	49.63	ADR	31.5	-48.95	0	32.18	68.2	-36.02	-	-	360	101	V
			2.181059	61.39	PK-U	31.6	-49	0	43.99	-	-	88.2	-44.21	360	101	V
			2.185525	49.45	ADR	31.6	-49	0	32.05	68.2	-36.15	-	-	360	101	H
			2.186236	61.44	PK-U	31.6	-49	0	44.04	-	-	88.2	-44.16	360	101	H
			3.25216	45.73	ADR	33	-46.8	0	31.93	68.2	-36.27	-	-	360	101	H
			3.254889	57.26	PK-U	33	-46.8	0	43.46	-	-	88.2	-44.74	360	101	H
			3.257035	45.93	ADR	32.9	-46.8	0	32.03	68.2	-36.17	-	-	360	101	V
			3.283205	57.5	PK-U	32.8	-47	0	43.3	-	-	88.2	-44.9	360	101	V
			* 9.091554	56.14	PK-U	36.2	-43.34	0	49	-	-	74	-25	360	101	V
			* 9.095026	44.3	ADR	36.2	-43.2	0	37.3	54	-16.7	-	-	360	101	H
			* 9.114308	56.68	PK-U	36.2	-43.47	0	49.41	-	-	74	-24.59	360	101	H
			* 9.115828	44.32	ADR	36.2	-43.4	0	37.12	54	-16.88	-	-	360	101	V
	7095 (RU26-8) (High Channel)	6 + 5	* 4.0133	55.41	PK-U	33.6	-45.12	0	43.89	-	-	74	-30.11	360	200	H
			* 4.007487	43.84	ADR	33.6	-45.08	0	32.36	54	-21.64	-	-	360	200	H
			* 4.017591	55.11	PK-U	33.6	-45.23	0	43.48	-	-	74	-30.52	360	200	V
			* 4.011312	43.81	ADR	33.6	-45.07	0	32.34	54	-21.66	-	-	360	200	V
			14.180271	54.94	PK-U	39.1	-42.84	0	51.2	-	-	88.2	-37	360	200	H
			14.195345	43.17	ADR	39.1	-43.01	0	39.26	68.2	-28.94	-	-	360	200	H
			14.189666	55.28	PK-U	39.1	-42.92	0	51.46	-	-	88.2	-36.74	360	200	V
			14.192626	43.02	ADR	39.1	-42.98	0	39.14	68.2	-29.06	-	-	360	200	V
			17.553791	53.36	PK-U	41.6	-39.56	0	55.4	-	-	88.2	-32.8	360	200	H
			17.592287	41.74	ADR	41.6	-39.7	0	43.64	68.2	-24.56	-	-	360	200	H
			17.579129	53.07	PK-U	41.6	-39.85	0	54.82	-	-	88.2	-33.38	360	101	V
			17.592903	41.41	ADR	41.6	-39.67	0	43.34	68.2	-24.86	-	-	360	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

40MHz

STATE A

UNII-5-8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/F ltr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	6125 (Low Channel)	6 + 5	3.086607	58.8	PK-U	33.1	-47.6	0	44.3	-	-	88.2	-43.9	334	200	H
			3.077062	46.8	ADR	33.1	-47.6	0	32.3	68.2	-35.9	-	-	334	200	H
			3.084337	58.1	PK-U	33.1	-47.6	0	43.6	-	-	88.2	-44.6	334	101	V
			3.1029	46.89	ADR	33.1	-47.5	0	32.49	68.2	-35.71	-	-	334	101	V
			10.191898	57.06	PK-U	37.6	-45.21	0	49.45	-	-	88.2	-38.75	334	200	H
			10.190162	45.68	ADR	37.6	-45.3	0	37.98	68.2	-30.22	-	-	334	200	H
			17.286663	54.02	PK-U	41.3	-39.9	0	55.42	-	-	88.2	-32.78	334	200	H
			17.287267	41.78	ADR	41.3	-39.9	0	43.18	68.2	-25.02	-	-	334	200	H
			10.198225	57.1	PK-U	37.6	-45.02	0	49.68	-	-	88.2	-38.52	334	200	V
			10.175219	45.33	ADR	37.5	-45.3	0	37.53	68.2	-30.67	-	-	334	200	V
			17.270753	53.34	PK-U	41.4	-39.7	0	55.04	-	-	88.2	-33.16	334	200	V
			17.283091	41.72	ADR	41.3	-39.9	0	43.12	68.2	-25.08	-	-	334	200	V
	6525 (Mid Channel)	6 + 5	* 3.2621	55.85	PK-U	33.1	-45.11	0	43.84	-	-	74	-30.16	0	101	H
			3.27355	55.51	PK-U	33	-45.09	0	43.42	-	-	88.2	-44.78	0	101	V
			* 3.263323	43.69	ADR	33	-44.88	0	31.81	54	-22.19	-	-	0	101	H
			3.294032	43.75	ADR	33	-44.88	0	31.87	68.2	-36.33	-	-	0	101	V
			9.770056	54.57	PK-U	36.8	-43.05	0	48.32	-	-	88.2	-39.88	0	101	H
			9.798985	55.02	PK-U	36.8	-43.05	0	48.77	-	-	88.2	-39.43	0	101	V
			9.799773	43.07	ADR	36.8	-43.11	0	36.76	68.2	-31.44	-	-	0	101	V
			9.799933	43.03	ADR	36.8	-43.12	0	36.71	68.2	-31.49	-	-	0	101	H
			13.084575	53.71	PK-U	39.1	-41.48	0	51.33	-	-	88.2	-36.87	0	101	H
			13.089878	41.99	ADR	39.1	-41.52	0	39.57	68.2	-28.63	-	-	0	101	V
			13.098749	53.87	PK-U	39.1	-41.61	0	51.36	-	-	88.2	-36.84	0	101	V
			13.104033	41.96	ADR	39.1	-41.51	0	39.55	68.2	-28.65	-	-	0	101	H
	7085 (High Channel)	6 + 5	3.528944	43.55	ADR	33	-44.96	0	31.59	68.2	-36.61	-	-	360	101	V
			3.536572	43.63	ADR	33	-45.08	0	31.55	68.2	-36.65	-	-	360	101	H
			3.538083	55.22	PK-U	33	-45.08	0	43.14	-	-	88.2	-45.06	360	101	H
			3.565345	55.68	PK-U	33.1	-45.1	0	43.68	-	-	88.2	-44.52	360	101	V
			10.596055	55.33	PK-U	37.5	-42.83	0	50	-	-	88.2	-38.2	360	101	V
			* 10.613929	43.37	ADR	37.5	-43.22	0	37.65	54	-16.35	-	-	360	101	H
			* 10.615541	43.35	ADR	37.5	-43.3	0	37.55	54	-16.45	-	-	360	101	V
			* 10.616441	55.65	PK-U	37.5	-43.31	0	49.84	-	-	74	-24.16	360	101	H
			14.101436	43.77	ADR	39	-42.62	0	40.15	68.2	-28.05	-	-	360	101	V
			14.102808	55.59	PK-U	39	-42.62	0	51.97	-	-	88.2	-36.23	360	101	H
			14.120202	55.97	PK-U	39.1	-42.86	0	52.21	-	-	88.2	-35.99	360	101	V
			14.123486	43.87	ADR	39.1	-42.92	0	40.05	68.2	-28.15	-	-	360	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

STATE B

UNII-5-8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/F ltr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	6125 (Low Channel)	6 + 5	3.00247	59.23	PK-U	32.9	-47.95	0	44.18	-	-	88.2	-44.02	0	200	H
			2.992497	47.64	ADR	32.8	-48	0	32.44	68.2	-35.76	-	-	0	200	H
			3.004993	59.46	PK-U	32.9	-47.9	0	44.46	-	-	88.2	-43.74	0	200	V
			2.981324	47.62	ADR	32.8	-48.1	0	32.32	68.2	-35.88	-	-	0	200	V
			10.071228	56.31	PK-U	37.4	-45.4	0	48.31	-	-	88.2	-39.89	0	200	H
			10.069416	44.61	ADR	37.4	-45.3	0	36.71	68.2	-31.49	-	-	0	200	H
			16.993946	53.96	PK-U	41.3	-40.9	0	54.36	-	-	88.2	-33.84	0	200	H
			16.994038	42.44	ADR	41.3	-40.9	0	42.84	68.2	-25.36	-	-	0	200	H
			10.051802	56.12	PK-U	37.4	-45.1	0	48.42	-	-	88.2	-39.78	0	101	V
			10.071232	44.6	ADR	37.4	-45.4	0	36.6	68.2	-31.6	-	-	0	101	V
			16.98953	54	PK-U	41.3	-41	0	54.3	-	-	88.2	-33.9	0	101	V
			16.976523	42.3	ADR	41.3	-40.8	0	42.8	68.2	-25.4	-	-	0	101	V
	6525 (Mid Channel)	6 + 5	* 15.699728	54.7	PK-U	40.4	-42.8	0	52.3	-	-	74	-21.7	360	101	V
			* 15.730481	43.3	ADR	40.4	-42.2	0	41.5	54	-12.5	-	-	360	101	V
			* 15.731029	43.38	ADR	40.4	-42.1	0	41.68	54	-12.32	-	-	360	101	H
			* 15.732796	55.2	PK-U	40.4	-42.12	0	53.48	-	-	74	-20.52	360	101	H
			* 2.789079	58.99	PK-U	32.5	-47.11	0	44.38	-	-	74	-29.62	360	200	V
			* 2.791393	58.48	PK-U	32.5	-47.1	0	43.88	-	-	74	-30.12	360	200	H
			* 2.795101	46.74	ADR	32.5	-47.2	0	32.04	54	-21.96	-	-	360	200	V
			* 2.79761	46.96	ADR	32.4	-47.2	0	32.16	54	-21.84	-	-	360	200	H
			* 9.447324	54.1	PK-U	36.6	-42.67	0	48.03	-	-	74	-25.97	360	200	V
			* 9.44792	54.09	PK-U	36.6	-42.61	0	48.08	-	-	74	-25.92	360	101	H
			* 9.462718	42.46	ADR	36.6	-42.77	0	36.29	54	-17.71	-	-	360	200	V
			* 9.473701	42.47	ADR	36.6	-42.8	0	36.27	54	-17.73	-	-	360	101	H
	7085 (High Channel)	6 + 5	* 15.907849	55.58	PK-U	40.5	-43.17	0	52.91	-	-	74	-21.09	360	200	V
			* 15.921015	43.69	ADR	40.4	-43	0	41.09	54	-12.91	-	-	360	101	H
			* 15.921235	43.71	ADR	40.4	-43.02	0	41.09	54	-12.91	-	-	360	200	V
			* 15.925155	56.14	PK-U	40.4	-43.1	0	53.44	-	-	74	-20.56	360	101	H
			* 2.796608	47.03	ADR	32.4	-47.2	0	32.23	54	-21.77	-	-	360	101	H
			* 2.797034	47.01	ADR	32.4	-47.2	0	32.21	54	-21.79	-	-	360	200	V
			* 2.798136	58.44	PK-U	32.4	-47.2	0	43.64	-	-	74	-30.36	360	200	V
			* 2.80478	58.88	PK-U	32.5	-47.3	0	44.08	-	-	74	-29.92	360	101	H
			* 9.385595	42.54	ADR	36.5	-42.1	0	36.94	54	-17.06	-	-	360	101	V
			* 9.386295	54.43	PK-U	36.5	-42.1	0	48.83	-	-	74	-25.17	360	101	V
			* 9.387863	42.33	ADR	36.5	-42.1	0	36.73	54	-17.27	-	-	360	101	H
			* 9.411129	54.6	PK-U	36.5	-42.7	0	48.4	-	-	74	-25.6	360	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

80MHz
STATE A

UNII-5-8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/F ltr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	6145 (Low Channel)	6 + 5	3.027853	44.16	ADR	32.9	-45.57	0	31.49	68.2	-36.71	-	-	360	101	H
			3.028418	55.77	PK-U	32.9	-45.56	0	43.11	-	-	88.2	-45.09	360	101	H
			3.032215	44.08	ADR	32.9	-45.54	0	31.44	68.2	-36.76	-	-	360	101	V
			3.070127	55.82	PK-U	33	-45.55	0	43.27	-	-	88.2	-44.93	360	101	V
			9.711587	43.08	ADR	36.7	-42.98	0	36.8	68.2	-31.4	-	-	360	101	H
			9.724406	43.03	ADR	36.7	-42.78	0	36.95	68.2	-31.25	-	-	360	101	V
			9.743884	55.1	PK-U	36.7	-43.08	0	48.72	-	-	88.2	-39.48	360	101	H
			9.750568	55.02	PK-U	36.8	-42.95	0	48.87	-	-	88.2	-39.33	360	101	V
			12.937066	42.21	ADR	39.3	-41.36	0	40.15	68.2	-28.05	-	-	360	101	H
			12.943557	54.12	PK-U	39.2	-41.43	0	51.89	-	-	88.2	-36.31	360	101	V
			12.95184	42.28	ADR	39.2	-41.5	0	39.98	68.2	-28.22	-	-	360	101	V
			12.957608	53.67	PK-U	39.2	-41.52	0	51.35	-	-	88.2	-36.85	360	101	H
	6545 (Mid Channel)	6 + 5	3.20869	44.37	ADR	33.3	-45.28	0	32.39	68.2	-35.81	-	-	360	101	V
			3.20994	44.11	ADR	33.3	-45.27	0	32.14	68.2	-36.06	-	-	360	101	H
			3.243113	56.61	PK-U	33.2	-45.13	0	44.68	-	-	88.2	-43.52	360	101	V
			3.243381	55.79	PK-U	33.2	-45.14	0	43.85	-	-	88.2	-44.35	360	101	H
			9.823141	43.16	ADR	36.9	-43.25	0	36.81	68.2	-31.39	-	-	360	101	V
			9.823953	55.15	PK-U	36.9	-43.25	0	48.8	-	-	88.2	-39.4	360	101	H
			9.826297	43.28	ADR	36.9	-43.24	0	36.94	68.2	-31.26	-	-	360	101	H
			9.827225	54.81	PK-U	36.9	-43.24	0	48.47	-	-	88.2	-39.73	360	101	V
			* 13.256182	41.6	ADR	39.1	-41.36	0	39.34	54	-14.66	-	-	360	101	V
			* 13.260206	41.42	ADR	39.1	-41.35	0	39.17	54	-14.83	-	-	360	101	H
			* 13.278608	53.18	PK-U	39.2	-41.02	0	51.36	-	-	74	-22.64	360	101	V
			* 13.280228	53.02	PK-U	39.2	-40.97	0	51.25	-	-	74	-22.75	360	101	H
	7025 (High Channel)	6 + 5	* 2.243983	46.42	ADR	32.2	-47.59	0	31.03	54	-22.97	-	-	360	101	H
			* 2.244596	58.24	PK-U	32.2	-47.58	0	42.86	-	-	74	-31.14	360	101	H
			* 2.24846	57.95	PK-U	32.2	-47.6	0	42.55	-	-	74	-31.45	360	101	V
			* 2.252704	46.36	ADR	32.2	-47.62	0	30.94	54	-23.06	-	-	360	101	V
			* 4.179667	44.15	ADR	33.8	-45.11	0	32.84	54	-21.16	-	-	360	101	V
			* 4.179876	55.6	PK-U	33.8	-45.1	0	44.3	-	-	74	-29.7	360	101	V
			* 4.180046	44.09	ADR	33.8	-45.1	0	32.79	54	-21.21	-	-	360	101	H
			* 4.194368	55.6	PK-U	33.8	-44.84	0	44.56	-	-	74	-29.44	360	101	H
			* 15.825762	42.5	ADR	40.6	-41.12	0	41.98	54	-12.02	-	-	360	101	H
			* 15.827973	54.05	PK-U	40.6	-41.06	0	53.59	-	-	74	-20.41	360	101	V
			* 15.836277	54.12	PK-U	40.6	-41.01	0	53.71	-	-	74	-20.29	360	101	H
			* 15.855435	42.53	ADR	40.6	-40.98	0	42.15	54	-11.85	-	-	360	101	V
11be (Partial RU Mode / Highest PSD)	6145 (484+242T-93) (Low Channel)	6 + 5	* 1.4051	47.33	ADR	28.7	-47.41	0	28.62	54	-25.38	-	-	0	200	V
			* 1.406651	59.1	PK-U	28.6	-47.42	0	40.28	-	-	74	-33.72	0	200	V
			* 1.410059	47.33	ADR	28.6	-47.41	0	28.52	54	-25.48	-	-	0	200	H
			* 1.412246	59.28	PK-U	28.6	-47.41	0	40.47	-	-	74	-33.53	0	200	H
			2.399568	58.56	PK-U	32.3	-47.29	0	43.57	-	-	88.2	-44.63	0	101	V
			2.399835	57.91	PK-U	32.3	-47.29	0	42.92	-	-	88.2	-45.28	0	200	H
			2.40011	47.62	ADR	32.3	-47.29	0	32.63	68.2	-35.57	-	-	0	101	V
			2.400178	47.57	ADR	32.3	-47.29	0	32.58	68.2	-35.62	-	-	0	200	H
			* 12.17326	41.98	ADR	38.9	-41.89	0	38.99	54	-15.01	-	-	0	200	V
			* 12.174752	41.95	ADR	38.9	-41.88	0	38.97	54	-15.03	-	-	0	200	H
			* 12.181379	54.04	PK-U	38.9	-41.8	0	51.14	-	-	74	-22.86	0	200	H
			* 12.197706	53.51	PK-U	38.9	-41.65	0	50.76	-	-	74	-23.24	0	200	V
	6545 (484+242T-93) (Mid Channel)	6 + 5	* 1.6916	58.14	PK-U	29	-47.72	0	39.42	-	-	74	-34.58	360	101	V
			* 1.693269	58.8	PK-U	29.1	-47.73	0	40.17	-	-	74	-33.83	360	101	H
			* 1.695915	46.69	ADR	29.1	-47.75	0	28.04	54	-25.96	-	-	360	101	V
			* 1.696456	46.71	ADR	29.1	-47.75	0	28.06	54	-25.94	-	-	360	101	H
			2.400088	46.71	ADR	32.3	-47.29	0	31.72	68.2	-36.48	-	-	360	200	V
			2.40011	57.81	PK-U	32.3	-47.29	0	42.82	-	-	88.2	-45.38	360	200	H
			2.413242	57.9	PK-U	32.3	-47.28	0	42.92	-	-	88.2	-45.28	360	200	V
			2.418606	46.52	ADR	32.3	-47.28	0	31.54	68.2	-36.66	-	-	360	200	H
			13.058548	42.08	ADR	39.1	-41.13	0	40.05	68.2	-28.15	-	-	360	200	V
			13.062436	42.01	ADR	39.1	-41.14	0	39.97	68.2	-28.23	-	-	360	101	H
			13.082258	54.02	PK-U	39.1	-41.43	0	51.69	-	-	88.2	-36.51	360	200	V
			13.086717	53.98	PK-U	39.1	-41.52	0	51.56	-	-	88.2	-36.64	360	101	H
	7025 (484+242T-92) (High Channel)	6 + 5	* 1.697183	58.69	PK-U	29.1	-47.76	0	40.03	-	-	74	-33.97	360	101	H
			* 1.697945	47.02	ADR	29.1	-47.77	0	28.35	54	-25.65	-	-	360	200	V
			* 1.706289	46.91	ADR	29.3	-47.73	0	28.48	54	-25.52	-	-	360	101	H
			* 1.709353	58.66	PK-U	29.3	-47.75	0	40.21	-	-	74	-33.79	360	200	V
			* 3.90589	43.3	ADR	33.5	-44.91	0	31.89	54	-22.11	-	-	360	200	H
			* 3.914385	43.4	ADR	33.5	-44.96	0	31.94	54	-22.06	-	-	360	200	V
			* 3.917648	55.25	PK-U	33.5	-44.98	0	43.77	-	-	74	-30.23	360	200	H
			* 3.921753	55.03	PK-U	33.5	-44.93	0	43.6	-	-	74	-30.4	360	200	V
			14.04389	56.15	PK-U	39	-42.9	0	52.25	-	-	88.2	-35.95	360	200	V
			14.059033	44.03	ADR	39	-42.92	0	40.11	68.2	-28.09	-	-	360	200	H
			14.059909	55.87	PK-U	39	-42.93	0	51.94	-	-	88.2	-36.26	360	200	H
			14.069592	44.03	ADR	39	-42.84	0	40.19	68.2	-28.01	-	-	360	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

STATE B

UNII-5-8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode / Highest Power)	6145 (Low Channel)	6 + 5	* 15.803023	55.17	PK-U	40.4	-42.5	0	53.07	-	-	74	-20.93	360	200	V
			* 15.81473	43.68	ADR	40.4	-42.9	0	41.18	54	-12.82	-	-	360	200	V
			* 15.817293	43.46	ADR	40.4	-42.86	0	41	54	-13	-	-	360	101	H
			* 15.822225	55.26	PK-U	40.4	-42.9	0	52.76	-	-	74	-21.24	360	101	H
			* 2.732899	46.69	ADR	32.4	-47.3	0	31.79	54	-22.21	-	-	360	200	H
			* 2.738661	58.86	PK-U	32.4	-47.27	0	43.99	-	-	74	-30.01	360	101	V
			* 2.74382	46.7	ADR	32.4	-47.32	0	31.78	54	-22.22	-	-	360	101	V
			* 2.7482	58.33	PK-U	32.4	-47.38	0	43.35	-	-	74	-30.65	360	200	H
			* 9.422162	53.59	PK-U	36.5	-42.87	0	47.22	-	-	74	-26.78	360	200	H
			* 9.446071	42.31	ADR	36.6	-42.61	0	36.3	54	-17.7	-	-	360	200	H
			* 9.455266	42.21	ADR	36.6	-42.7	0	36.11	54	-17.89	-	-	360	101	V
			* 9.456418	53.89	PK-U	36.6	-42.7	0	47.79	-	-	74	-26.21	360	101	V
	6545 (Mid Channel)	6 + 5	1.913998	46.8	ADR	31.1	-46.2	0	31.7	68.2	-36.5	-	-	360	101	H
			1.914001	46.59	ADR	31.1	-46.2	0	31.49	68.2	-36.71	-	-	360	200	V
			1.914314	58.31	PK-U	31.1	-46.2	0	43.21	-	-	88.2	-44.99	360	101	H
			1.914828	58.41	PK-U	31.1	-46.2	0	43.31	-	-	88.2	-44.89	360	200	V
			3.07398	45.14	ADR	33.1	-46.3	0	31.94	68.2	-36.26	-	-	360	101	V
			3.074109	56.7	PK-U	33.1	-46.29	0	43.51	-	-	88.2	-44.69	360	101	V
			3.091642	45.18	ADR	33.1	-46.06	0	32.22	68.2	-35.98	-	-	360	101	H
			3.104427	57.25	PK-U	33.1	-45.94	0	44.41	-	-	88.2	-43.79	360	101	H
			10.130022	53.98	PK-U	37.7	-42.3	0	49.38	-	-	88.2	-38.82	360	200	H
			10.133393	42.47	ADR	37.7	-42.4	0	37.77	68.2	-30.43	-	-	360	101	V
			10.134864	54.41	PK-U	37.7	-42.4	0	49.71	-	-	88.2	-38.49	360	101	V
			10.152848	42.52	ADR	37.8	-42.5	0	37.82	68.2	-30.38	-	-	360	200	H
	7025 (High Channel)	6 + 5	1.912838	58.97	PK-U	31.1	-46.22	0	43.85	-	-	88.2	-44.35	360	101	H
			1.912865	46.73	ADR	31.1	-46.21	0	31.62	68.2	-36.58	-	-	360	101	H
			1.913911	46.63	ADR	31.1	-46.2	0	31.53	68.2	-36.67	-	-	360	101	V
			1.914413	58.61	PK-U	31.1	-46.2	0	43.51	-	-	88.2	-44.69	360	101	V
			3.078796	45.07	ADR	33.1	-46.2	0	31.97	68.2	-36.23	-	-	360	101	V
			3.087688	56.82	PK-U	33.2	-46.23	0	43.79	-	-	88.2	-44.41	360	101	V
			3.099916	57.14	PK-U	33.1	-46.09	0	44.15	-	-	88.2	-44.05	360	101	H
			3.103654	45.08	ADR	33.1	-45.9	0	32.28	68.2	-35.92	-	-	360	101	H
			10.099019	54.25	PK-U	37.7	-42.8	0	49.15	-	-	88.2	-39.05	360	200	V
			10.099383	42.34	ADR	37.7	-42.8	0	37.24	68.2	-30.96	-	-	360	200	V
			10.131422	42.58	ADR	37.7	-42.34	0	37.94	68.2	-30.26	-	-	360	101	H
			10.151064	54.03	PK-U	37.8	-42.59	0	49.24	-	-	88.2	-38.96	360	101	H
11be (Partial RU Mode / Highest PSD)	6145 (484+242T-93) (Low Channel)	6 + 5	2.034971	60.71	PK-U	30.8	-48.9	0	42.61	-	-	88.2	-45.59	1	101	H
			2.035193	49.18	ADR	30.8	-48.9	0	31.08	68.2	-37.12	-	-	1	101	H
			2.038455	49.28	ADR	30.9	-48.9	0	31.28	68.2	-36.92	-	-	1	101	V
			2.047054	61.02	PK-U	31.1	-49.09	0	43.03	-	-	88.2	-45.17	1	101	V
			3.042168	58.67	PK-U	32.9	-47.5	0	44.07	-	-	88.2	-44.13	1	101	V
			3.051819	46.66	ADR	32.9	-47.6	0	31.96	68.2	-36.24	-	-	1	101	H
			3.057646	46.79	ADR	32.9	-47.6	0	32.09	68.2	-36.11	-	-	1	101	V
			3.070911	58.6	PK-U	33	-47.61	0	43.99	-	-	88.2	-44.21	1	101	H
			* 12.288042	54.48	PK-U	38.9	-42	0	51.38	-	-	74	-22.62	1	101	V
			* 12.292022	54.85	PK-U	38.8	-42.1	0	51.55	-	-	74	-22.45	1	101	H
			* 12.293261	43.05	ADR	38.8	-42.1	0	39.75	54	-14.25	-	-	1	101	V
			12.295989	43.01	ADR	38.8	-42	0	39.81	54	-14.19	-	-	1	101	H
	6545 (484+242T-92) (Mid Channel)	6 + 5	* 2.341981	61.56	PK-U	32	-49.3	0	44.26	-	-	74	-29.74	360	101	H
			* 2.343072	61.49	PK-U	32	-49.39	0	44.1	-	-	74	-29.9	360	101	V
			* 2.343945	49.76	ADR	32	-49.31	0	32.45	54	-21.55	-	-	360	101	H
			* 2.350933	49.8	ADR	32.1	-49.11	0	32.79	54	-21.21	-	-	360	101	V
			3.240914	57.28	PK-U	33	-46.79	0	43.49	-	-	88.2	-44.71	360	101	V
			3.250469	57.66	PK-U	33	-46.8	0	43.86	-	-	88.2	-44.34	360	101	H
			3.253846	45.79	ADR	33	-46.8	0	31.99	68.2	-36.21	-	-	360	101	V
			3.256442	45.79	ADR	33	-46.8	0	31.99	68.2	-36.21	-	-	360	101	H
			13.068251	54.84	PK-U	39.1	-41.87	0	52.07	-	-	88.2	-36.13	360	101	V
			13.073171	54.38	PK-U	39.1	-41.88	0	51.6	-	-	88.2	-36.6	360	101	H
			13.078042	42.98	ADR	39	-41.9	0	40.08	68.2	-28.12	-	-	360	101	V
			13.091033	42.81	ADR	39.1	-41.9	0	40.01	68.2	-28.19	-	-	360	101	H
	7025 (484+242T-91) (High Channel)	6 + 5	* 4.621977	58.11	PK-U	34	-46.9	0	45.21	-	-	74	-28.79	0	101	H
			* 4.626972	46.55	ADR	34	-46.9	0	33.65	54	-20.35	-	-	0	101	H
			* 4.624485	58.62	PK-U	34	-46.9	0	45.72	-	-	74	-28.28	0	101	V
			* 4.631982	46.39	ADR	34	-46.9	0	33.49	54	-20.51	-	-	0	101	V
			2.524798	61.67	PK-U	32.4	-49.18	0	44.89	-	-	88.2	-43.31	0	101	V
			2.543476	49.45	ADR	32.3	-48.95	0	32.8	68.2	-35.4	-	-	0	101	V
			2.547881	49.54	ADR	32.3	-48.8	0	33.04	68.2	-35.16	-	-	0	101	H
			2.549948	61.18	PK-U	32.3	-48.71	0	44.77	-	-	88.2	-43.43	0	101	H
			9.632571	44.79	ADR	36.6	-44.56	0	36.83	68.2	-31.37	-	-	0	101	H
			9.634931	44.97	ADR	36.7	-44.51	0	37.16	68.2	-31.04	-	-	0	101	V
			9.637547	57.08	PK-U	36.6	-44.35	0	49.33	-	-	88.2	-38.87	0	101	H
			9.663232	56.33	PK-U	36.7	-44.52	0	48.51	-	-	88.2	-39.69	0	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

160MHz
STATE A

UNII-5-8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode)	6185 (Low Channel)	6 + 5	*2.232961	58.26	PK-U	32.1	-47.49	0	42.87	-	-	74	-31.13	1	101	V
			*2.256323	46.28	ADR	32.2	-47.63	0	30.85	54	-23.15	-	-	1	101	V
			*2.256904	46.36	ADR	32.2	-47.63	0	30.93	54	-23.07	-	-	1	101	H
			*2.271236	58.38	PK-U	32.1	-47.62	0	42.86	-	-	74	-31.14	1	101	H
			*3.945925	43.73	ADR	33.5	-45.12	0	32.11	54	-21.89	-	-	1	101	V
			*3.951925	55.56	PK-U	33.5	-45.06	0	44	-	-	74	-30	1	101	V
			*3.9547	43.67	ADR	33.5	-45.05	0	32.12	54	-21.88	-	-	1	101	H
			*3.956527	54.98	PK-U	33.5	-45.08	0	43.4	-	-	74	-30.6	1	101	H
			*11.835312	54.2	PK-U	38.6	-41.95	0	50.85	-	-	74	-23.15	1	101	V
			*11.846743	42.56	ADR	38.6	-42.14	0	39.02	54	-14.98	-	-	1	101	V
			*11.851799	53.93	PK-U	38.6	-42.27	0	50.26	-	-	74	-23.74	1	101	H
			*11.856478	42.51	ADR	38.6	-42.4	0	38.71	54	-15.29	-	-	1	101	H
	6505 (Mid Channel)	6 + 5	*2.243035	46.36	ADR	32.2	-47.57	0	30.99	54	-23.01	-	-	1	101	H
			*2.245828	58.42	PK-U	32.2	-47.59	0	43.03	-	-	74	-30.97	1	101	V
			*2.254692	57.69	PK-U	32.2	-47.63	0	42.26	-	-	74	-31.74	1	101	H
			*2.258262	46.37	ADR	32.2	-47.65	0	30.92	54	-23.08	-	-	1	101	V
			*4.193193	43.52	ADR	33.8	-44.84	0	32.48	54	-21.52	-	-	1	101	V
			*4.209001	55.21	PK-U	33.9	-44.69	0	44.42	-	-	74	-29.58	1	101	H
			*4.218866	55.18	PK-U	34	-44.61	0	44.57	-	-	74	-29.43	1	101	V
			*4.220862	43.53	ADR	34	-44.68	0	32.85	54	-21.15	-	-	1	101	H
			*11.763388	54.26	PK-U	38.5	-42.4	0	50.36	-	-	74	-23.64	1	101	H
			11.785514	42.46	ADR	38.6	-42.55	0	38.51	54	-15.49	-	-	1	101	H
			*11.785563	42.39	ADR	38.6	-42.55	0	38.44	54	-15.56	-	-	1	101	V
			*11.796641	54.51	PK-U	38.6	-42.64	0	50.47	-	-	74	-23.53	1	101	V
	6985 (High Channel)	6 + 5	*2.244255	57.96	PK-U	32.2	-47.59	0	42.57	-	-	74	-31.43	0	101	V
			*2.248224	46.33	ADR	32.2	-47.6	0	30.93	54	-23.07	-	-	0	101	V
			*2.250477	46.32	ADR	32.2	-47.62	0	30.9	54	-23.1	-	-	0	101	H
			*2.258267	57.77	PK-U	32.2	-47.65	0	42.32	-	-	74	-31.68	0	101	H
			*3.836689	43.94	ADR	33.4	-45.04	0	32.3	54	-21.7	-	-	0	101	H
			*3.840425	44.15	ADR	33.4	-45.1	0	32.45	54	-21.55	-	-	0	101	V
			*3.849892	55.8	PK-U	33.4	-44.92	0	44.28	-	-	74	-29.72	0	101	H
			*3.855837	55.98	PK-U	33.5	-45	0	44.48	-	-	74	-29.52	0	101	V
			*11.807082	42.41	ADR	38.6	-42.45	0	38.56	54	-15.44	-	-	0	101	H
			*11.807618	55.16	PK-U	38.6	-42.45	0	51.31	-	-	74	-22.69	0	101	V
			*11.819769	53.98	PK-U	38.6	-42.13	0	50.45	-	-	74	-23.55	0	101	H
			*11.830944	42.57	ADR	38.6	-41.96	0	39.21	54	-14.79	-	-	0	101	V
11be (Partial RU Mode)	6185 (996+484T-S95) (Low Channel)	6 + 5	14.025735	47.67	ADR	39	-45.83	0	40.84	68.2	-27.36	-	-	360	101	V
			14.01608	47.65	ADR	39	-45.82	0	40.83	68.2	-27.37	-	-	360	101	H
			10.023743	48.63	ADR	37.3	-47.55	0	38.38	68.2	-29.82	-	-	360	199	V
			10.049122	48.43	ADR	37.3	-47.78	0	37.95	68.2	-30.25	-	-	360	101	H
			1.959568	50.44	ADR	31.8	-49.76	0	32.48	68.2	-35.72	-	-	360	200	V
			1.961719	50.38	ADR	31.8	-49.9	0	32.28	68.2	-35.92	-	-	360	101	H
			1.952903	62.26	PK-U	31.7	-50.13	0	43.83	-	-	88.2	-44.37	360	101	H
			1.960723	62.05	PK-U	31.8	-49.87	0	43.98	-	-	88.2	-44.22	360	200	V
			10.059069	60.16	PK-U	37.3	-47.78	0	49.68	-	-	88.2	-38.52	360	101	H
			14.03541	59.89	PK-U	39	-45.8	0	53.09	-	-	88.2	-35.11	360	101	H
			10.01234	60.52	PK-U	37.3	-47.97	0	49.85	-	-	88.2	-38.35	360	199	V
			14.033134	59.76	PK-U	39	-45.57	0	53.19	-	-	88.2	-35.01	360	101	V
	6505 (996+484T-S95) (Mid Channel)	6 + 5	13.976094	47.72	ADR	39	-46.03	0	40.69	68.2	-27.51	-	-	360	200	V
			13.964774	47.5	ADR	39	-46.26	0	40.24	68.2	-27.96	-	-	360	101	H
			10.012331	48.44	ADR	37.3	-47.97	0	37.77	68.2	-30.43	-	-	360	101	V
			10.015344	48.26	ADR	37.3	-47.93	0	37.63	68.2	-30.57	-	-	360	199	H
			1.958535	50.31	ADR	31.8	-49.51	0	32.6	68.2	-35.6	-	-	360	101	H
			1.959896	50.52	ADR	31.8	-49.79	0	32.53	68.2	-35.67	-	-	360	199	V
			1.959606	62.01	PK-U	31.8	-49.76	0	44.05	-	-	88.2	-44.15	360	101	H
			1.95355	62.08	PK-U	31.7	-49.99	0	43.79	-	-	88.2	-44.41	360	199	V
			10.034086	59.97	PK-U	37.3	-47.41	0	49.86	-	-	88.2	-38.34	360	199	H
			13.985888	58.93	PK-U	39	-46.11	0	51.82	-	-	88.2	-36.38	360	101	H
			9.999036	59.85	PK-U	37.3	-47.9	0	49.25	-	-	88.2	-38.95	360	101	V
			13.972058	59.52	PK-U	39	-46.29	0	52.23	-	-	88.2	-35.97	360	200	V
	6985 (996+484T-S94) (High Channel)	6 + 5	13.966265	47.85	ADR	39	-46.2	0	40.65	68.2	-27.55	-	-	360	101	V
			13.972898	47.55	ADR	39	-46.21	0	40.34	68.2	-27.86	-	-	360	101	H
			10.026008	48.47	ADR	37.3	-47.6	0	38.17	68.2	-30.03	-	-	360	200	V
			10.013947	48.55	ADR	37.3	-48.01	0	37.84	68.2	-30.36	-	-	360	101	H
			1.956167	50.5	ADR	31.7	-49.77	0	32.43	68.2	-35.77	-	-	360	101	V
			1.961574	50.31	ADR	31.8	-49.9	0	32.21	68.2	-35.99	-	-	360	199	H
			1.955201	62	PK-U	31.7	-50.2	0	43.5	-	-	88.2	-44.7	360	199	H
			1.959797	62.69	PK-U	31.8	-49.78	0	44.71	-	-	88.2	-43.49	360	101	V
			10.014787	61.04	PK-U	37.3	-48	0	50.34	-	-	88.2	-37.86	360	101	H
			13.963063	59.77	PK-U	39	-46.46	0	52.31	-	-	88.2	-35.89	360	101	H
			10.059756	59.95	PK-U	37.3	-47.57	0	49.68	-	-	88.2	-38.52	360	200	V
			13.92828	59.17	PK-U	39	-46.5	0	51.67	-	-	88.2	-36.53	360	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

STATE B

UNII-5-8 (MIMO CDD)	Channel Frequency (MHz)	Ant. #	Frequency (GHz)	Meter Reading (dBuV)	Det	AF (dB/m)	Amp/Cbl/F ltr/Pad (dB)	DCCF (dB)	Correct Reading (dBuV/m)	Avg Limit (dBuV/m)	Avg Margin (dB)	Pk Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11be (SU Mode)	6185 (Low Channel)	6 + 5	* 15.745948	55.27	PK-U	40.4	-41.91	0	53.76	-	-	74	-20.24	360	200	H
			* 15.747676	54.97	PK-U	40.4	-41.93	0	53.44	-	-	74	-20.56	360	101	V
			* 15.74784	43.45	ADR	40.4	-41.92	0	41.93	54	-12.07	-	-	360	200	H
			* 15.762699	43.52	ADR	40.4	-42.57	0	41.35	54	-12.65	-	-	360	101	V
			* 2.791004	47.06	ADR	32.5	-47.1	0	32.46	54	-21.54	-	-	360	199	H
			* 2.793331	46.94	ADR	32.5	-47.1	0	32.34	54	-21.66	-	-	360	101	V
			* 2.799361	58.76	PK-U	32.4	-47.2	0	43.96	-	-	74	-30.04	360	101	V
			* 2.802402	58.97	PK-U	32.5	-47.2	0	44.27	-	-	74	-29.73	360	199	H
			* 9.459311	54.3	PK-U	36.6	-42.7	0	48.2	-	-	74	-25.8	360	200	H
			* 9.462251	54.76	PK-U	36.6	-42.73	0	48.63	-	-	74	-25.37	360	101	V
			* 9.47381	42.41	ADR	36.6	-42.8	0	36.21	54	-17.79	-	-	360	200	H
			* 9.475245	42.28	ADR	36.6	-42.82	0	36.06	54	-17.94	-	-	360	101	V
	6505 (Mid Channel)	6 + 5	* 15.92306	43.69	ADR	40.4	-43	0	41.09	54	-12.91	-	-	360	101	V
			* 15.924056	43.84	ADR	40.4	-43.01	0	41.23	54	-12.77	-	-	360	200	H
			* 15.930256	55.41	PK-U	40.4	-42.9	0	52.91	-	-	74	-21.09	360	200	H
			* 15.930416	55.53	PK-U	40.4	-42.9	0	53.03	-	-	74	-20.97	360	101	V
			* 2.795147	46.92	ADR	32.5	-47.2	0	32.22	54	-21.78	-	-	360	200	V
			* 2.79604	46.93	ADR	32.5	-47.2	0	32.23	54	-21.77	-	-	360	200	H
			* 2.797965	59.05	PK-U	32.4	-47.2	0	44.25	-	-	74	-29.75	360	200	H
			* 2.800462	58.49	PK-U	32.4	-47.15	0	43.74	-	-	74	-30.26	360	200	V
			* 9.404099	42.28	ADR	36.5	-42.59	0	36.19	54	-17.81	-	-	360	200	H
			* 9.410202	53.88	PK-U	36.5	-42.7	0	47.68	-	-	74	-26.32	360	200	H
			* 9.431112	53.79	PK-U	36.6	-42.6	0	47.79	-	-	74	-26.21	360	101	V
			* 9.43566	42.32	ADR	36.6	-42.7	0	36.22	54	-17.78	-	-	360	101	V
	6985 (High Channel)	6 + 5	* 15.863828	43.79	ADR	40.5	-43	0	41.29	54	-12.71	-	-	360	200	V
			* 15.866079	55.69	PK-U	40.5	-42.9	0	53.29	-	-	74	-20.71	360	200	V
			* 15.873219	43.8	ADR	40.6	-42.98	0	41.42	54	-12.58	-	-	360	101	H
			* 15.873539	55.59	PK-U	40.6	-42.95	0	53.24	-	-	74	-20.76	360	101	H
			* 2.789366	59	PK-U	32.5	-47.14	0	44.36	-	-	74	-29.64	360	200	V
			* 2.797567	47.05	ADR	32.4	-47.2	0	32.25	54	-21.75	-	-	360	101	H
			* 2.799996	46.99	ADR	32.4	-47.2	0	32.19	54	-21.81	-	-	360	200	V
			* 2.801296	58.88	PK-U	32.5	-47.13	0	44.25	-	-	74	-29.75	360	101	H
			* 9.416934	42.26	ADR	36.5	-42.61	0	36.15	54	-17.85	-	-	360	101	V
			* 9.421134	42.33	ADR	36.5	-42.73	0	36.1	54	-17.9	-	-	360	200	H
			* 9.425041	54.26	PK-U	36.5	-42.7	0	48.06	-	-	74	-25.94	360	101	V
			* 9.430153	54.69	PK-U	36.5	-42.6	0	48.59	-	-	74	-25.41	360	200	H
11be (Partial RU Mode)	6185 (996+484T-S95) (Low Channel)	6 + 5	* 1.238888	62.8	PK-U	28.8	-49.81	0	41.79	-	-	74	-32.21	360	200	H
			* 1.235662	50.94	ADR	29	-49.73	0	30.21	54	-23.79	-	-	360	200	H
			* 1.239044	62.29	PK-U	28.8	-49.8	0	41.29	-	-	74	-32.71	360	200	V
			* 1.234858	50.95	ADR	29	-49.8	0	30.15	54	-23.85	-	-	360	200	V
			2.399626	62.36	PK-U	32.3	-48.8	0	45.86	-	-	88.2	-42.34	360	101	V
			2.399857	61.18	PK-U	32.3	-48.8	0	44.68	-	-	88.2	-43.52	360	101	H
			2.399981	50.69	ADR	32.3	-48.8	0	34.19	68.2	-34.01	-	-	360	101	V
			2.400003	51.26	ADR	32.3	-48.8	0	34.76	68.2	-33.44	-	-	360	101	H
			14.179044	54.7	PK-U	38.9	-41.7	0	51.9	-	-	88.2	-36.3	360	200	H
			14.189218	43.19	ADR	38.9	-41.8	0	40.29	68.2	-27.91	-	-	360	200	H
			17.237011	53.26	PK-U	41.6	-37.8	0	57.06	-	-	88.2	-31.14	360	200	V
			17.258097	41.16	ADR	41.6	-37.89	0	44.87	68.2	-23.33	-	-	360	200	V
	6505 (996+484T-S95) (Mid Channel)	6 + 5	* 1.031938	62.6	PK-U	28.3	-49.6	0	41.3	-	-	74	-32.7	360	200	H
			* 1.032307	50.87	ADR	28.3	-49.57	0	29.6	54	-24.4	-	-	360	200	H
			* 1.025449	62.28	PK-U	28.4	-49.46	0	41.22	-	-	74	-32.78	360	101	V
			* 1.030075	50.85	ADR	28.3	-49.6	0	29.55	54	-24.45	-	-	360	101	V
			* 2.382694	61.19	PK-U	32.3	-48.9	0	44.59	-	-	74	-29.41	360	101	V
			2.399928	51.07	ADR	32.3	-48.8	0	34.57	68.2	-33.63	-	-	360	101	V
			2.399963	62.12	PK-U	32.3	-48.8	0	45.62	-	-	88.2	-42.58	360	101	H
			2.400057	50.48	ADR	32.3	-48.8	0	33.98	68.2	-34.22	-	-	360	101	H
			13.4547	42.99	ADR	38.9	-41.87	0	40.02	68.2	-28.18	-	-	360	101	V
			13.467407	55.43	PK-U	38.9	-41.76	0	52.57	-	-	88.2	-35.63	360	101	V
			13.496742	43.03	ADR	38.8	-41.73	0	40.1	68.2	-28.1	-	-	360	199	H
			13.512116	54.8	PK-U	38.9	-41.69	0	52.01	-	-	88.2	-36.19	360	199	H
	6985 (996+484T-S94) (High Channel)	6 + 5	* 11.330294	42.07	ADR	38.1	-41.67	0	38.5	54	-15.5	-	-	360	200	V
			* 11.347456	53.65	PK-U	38.1	-42.45	0	49.3	-	-	74	-24.7	360	101	H
			* 11.349116	53.53	PK-U	38.1	-42.41	0	49.22	-	-	74	-24.78	360	200	V
			* 11.350224	41.89	ADR	38.1	-42.5	0	37.49	54	-16.51	-	-	360	101	H
			* 15.791715	54.85	PK-U	40.4	-42.3	0	52.95	-	-	74	-21.05	360	101	V
			* 15.794818	55.81	PK-U	40.4	-42.32	0	53.89	-	-	74	-20.11	360	200	H
			* 15.811857	43.62	ADR	40.4	-42.89	0	41.13	54	-12.87	-	-	360	200	H
			* 15.812925	43.66	ADR	40.4	-42.9	0	41.16	54	-12.84	-	-	360	101	V
			* 3.857888	43.62	ADR	33.4	-45.1	0	31.92	54	-22.08	-	-	360	200	V
			* 3.86176	43.76	ADR	33.4	-45.02	0	32.14	54	-21.86	-	-	360	200	H
			* 3.868021	56.04	PK-U	33.4	-45.1	0	44.34	-	-	74	-29.66	360	200	V
			* 3.870826	55.26	PK-U	33.4	-45.1	0	43.56	-	-	74	-30.44	360	200	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band



PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

WORST-CASE HARMONICS AND SPURIOUS EMISSIONS

STATE A

802.11be EHT20 / 117 & 6535 MHz / 2TX CDD / RU 26 / Index 0:

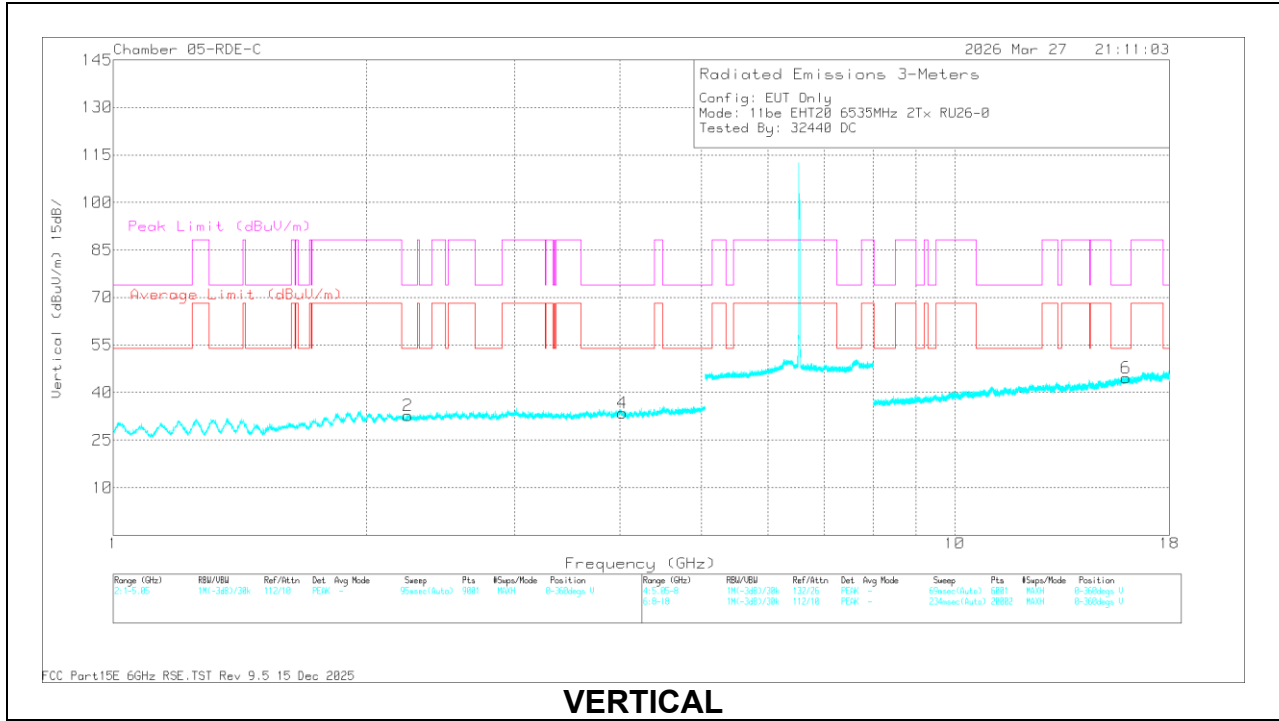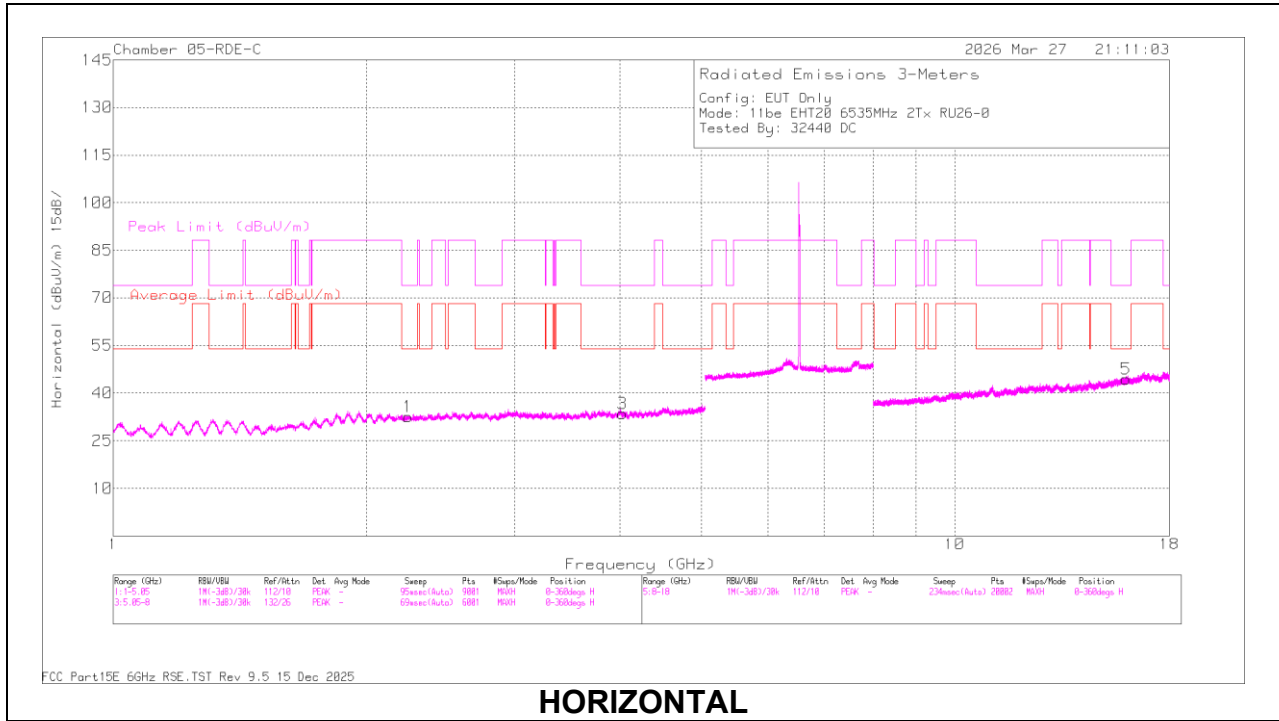

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	230300 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.260566	62.12	PK-U	31.5	0	-50	43.62	-	-	74	-30.38	360	101	H
	* 2.248478	49.9	ADR	31.5	0	-50.2	31.2	54	-22.8	-	-	360	101	H
2	* 4.011666	59.08	PK-U	33.5	0	-48	44.58	-	-	74	-29.42	360	101	H
	* 4.008849	47.28	ADR	33.5	0	-48.02	32.76	54	-21.24	-	-	360	101	H
3	* 2.256344	61.48	PK-U	31.5	0	-50.23	42.75	-	-	74	-31.25	360	101	V
	* 2.25126	49.83	ADR	31.5	0	-50.1	31.23	54	-22.77	-	-	360	101	V
4	* 4.011783	58.48	PK-U	33.5	0	-48	43.98	-	-	74	-30.02	360	101	V
	* 4.00953	47.41	ADR	33.5	0	-48	32.91	54	-21.09	-	-	360	101	V
5	* 16.000767	59.47	PK-U	40.8	0	-45.95	54.32	-	-	74	-19.68	360	101	H
	* 16.007475	47.59	ADR	40.8	0	-45.61	42.78	54	-11.22	-	-	360	101	H
6	* 16.008911	59.37	PK-U	40.8	0	-45.96	54.21	-	-	74	-19.79	360	101	V
	* 16.002583	47.69	ADR	40.8	0	-45.77	42.72	54	-11.28	-	-	360	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

STATE B
802.11be EHT160 / 47 & 6185MHz / 2TX CDD / SU:

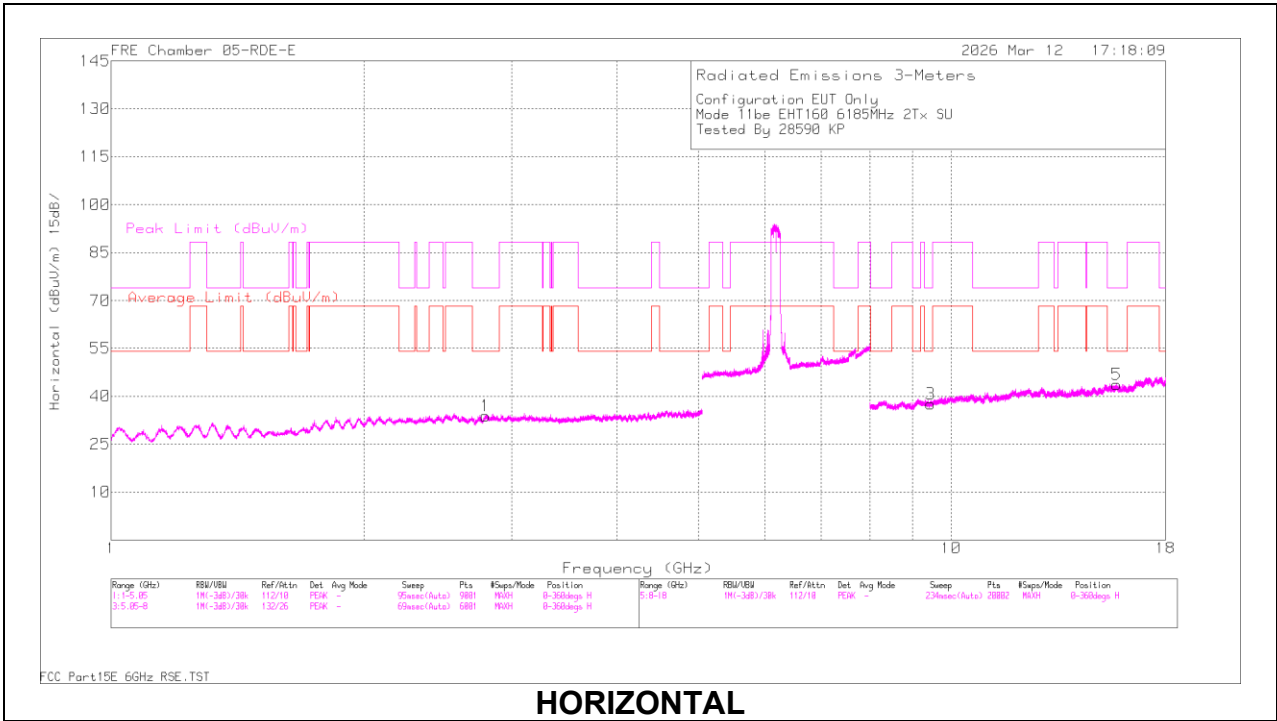

HORIZONTAL

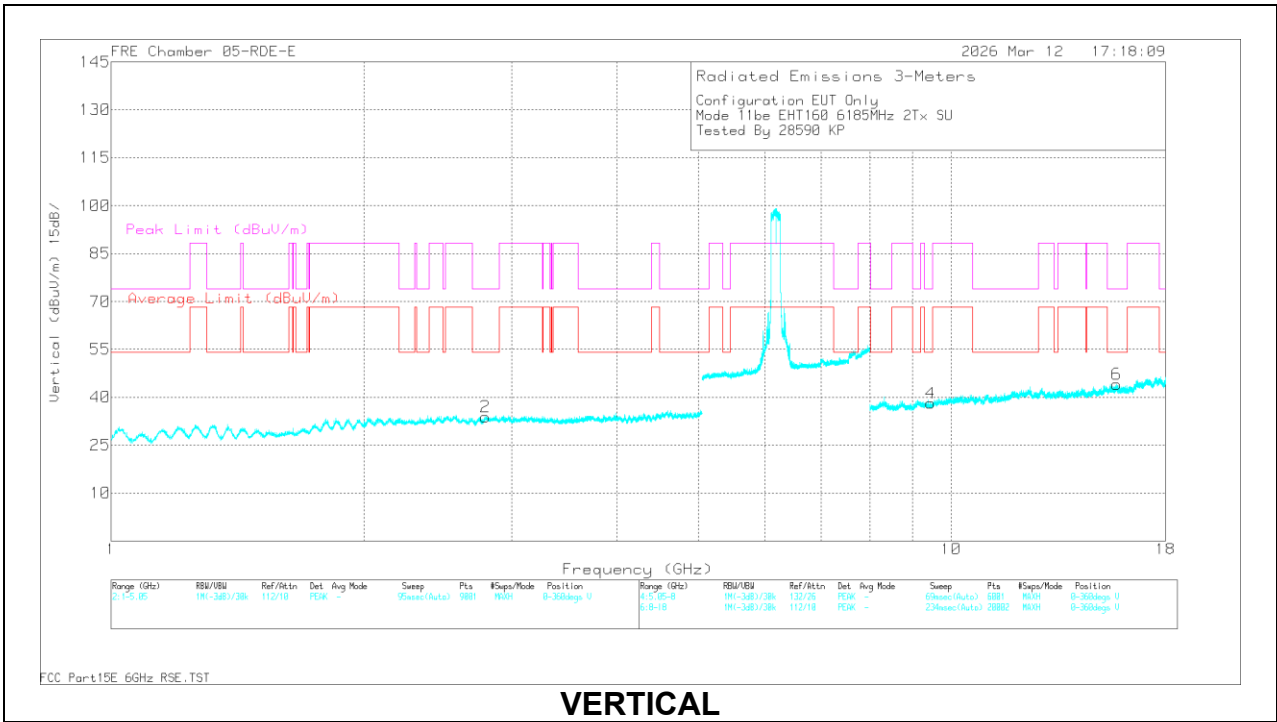

VERTICAL

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	266805 ACF (dBm)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.802402	58.97	PK-U	32.5	0	-47.2	44.27	-	-	74	-29.73	360	199	H
	* 2.791004	47.06	ADR	32.5	0	-47.1	32.46	54	-21.54	-	-	360	199	H
2	* 2.799361	58.76	PK-U	32.4	0	-47.2	43.96	-	-	74	-30.04	360	101	V
	* 2.793331	46.94	ADR	32.5	0	-47.1	32.34	54	-21.66	-	-	360	101	V
3	* 9.459311	54.3	PK-U	36.6	0	-42.7	48.2	-	-	74	-25.8	360	200	H
	* 9.47381	42.41	ADR	36.6	0	-42.8	36.21	54	-17.79	-	-	360	200	H
4	* 9.462251	54.76	PK-U	36.6	0	-42.73	48.63	-	-	74	-25.37	360	101	V
	* 9.475245	42.28	ADR	36.6	0	-42.82	36.06	54	-17.94	-	-	360	101	V
5	* 15.745948	55.27	PK-U	40.4	0	-41.91	53.76	-	-	74	-20.24	360	200	H
	* 15.74784	43.45	ADR	40.4	0	-41.92	41.93	54	-12.07	-	-	360	200	H
6	* 15.747676	54.97	PK-U	40.4	0	-41.93	53.44	-	-	74	-20.56	360	101	V
	* 15.762699	43.52	ADR	40.4	0	-42.57	41.35	54	-12.65	-	-	360	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band



PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.3. WORST CASE BELOW 1 GHz
STATE A

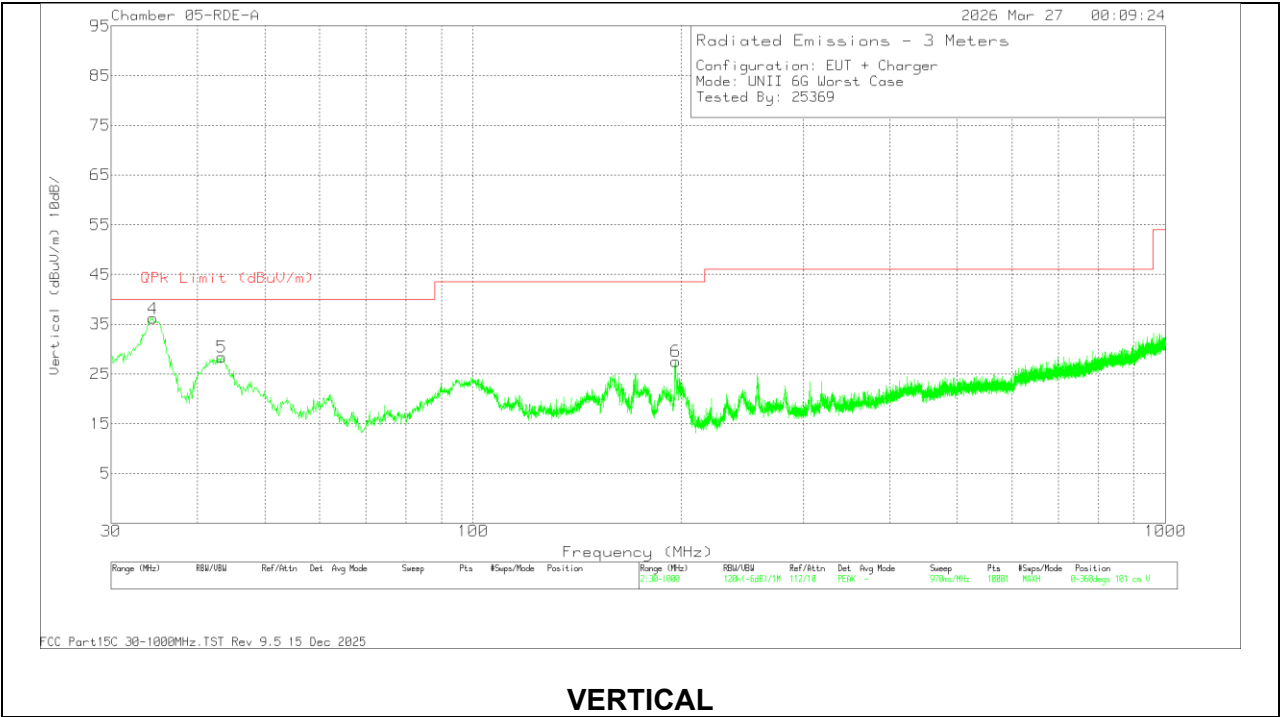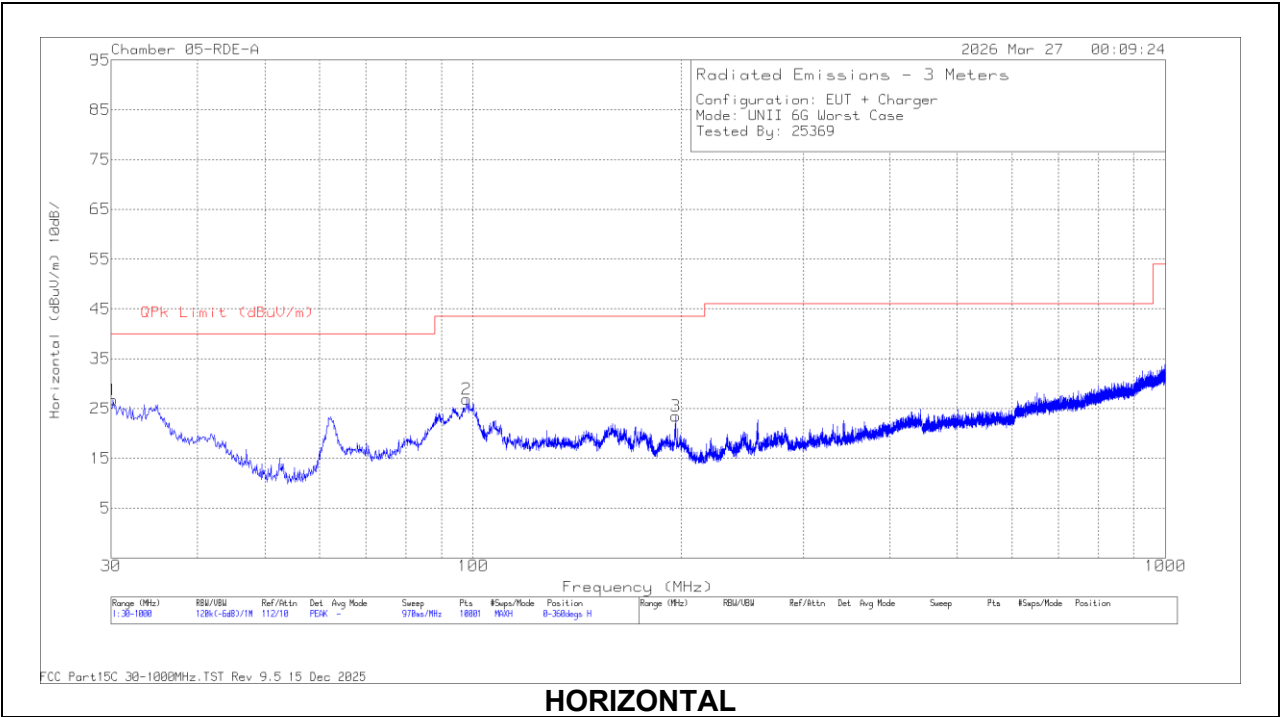

STATE B

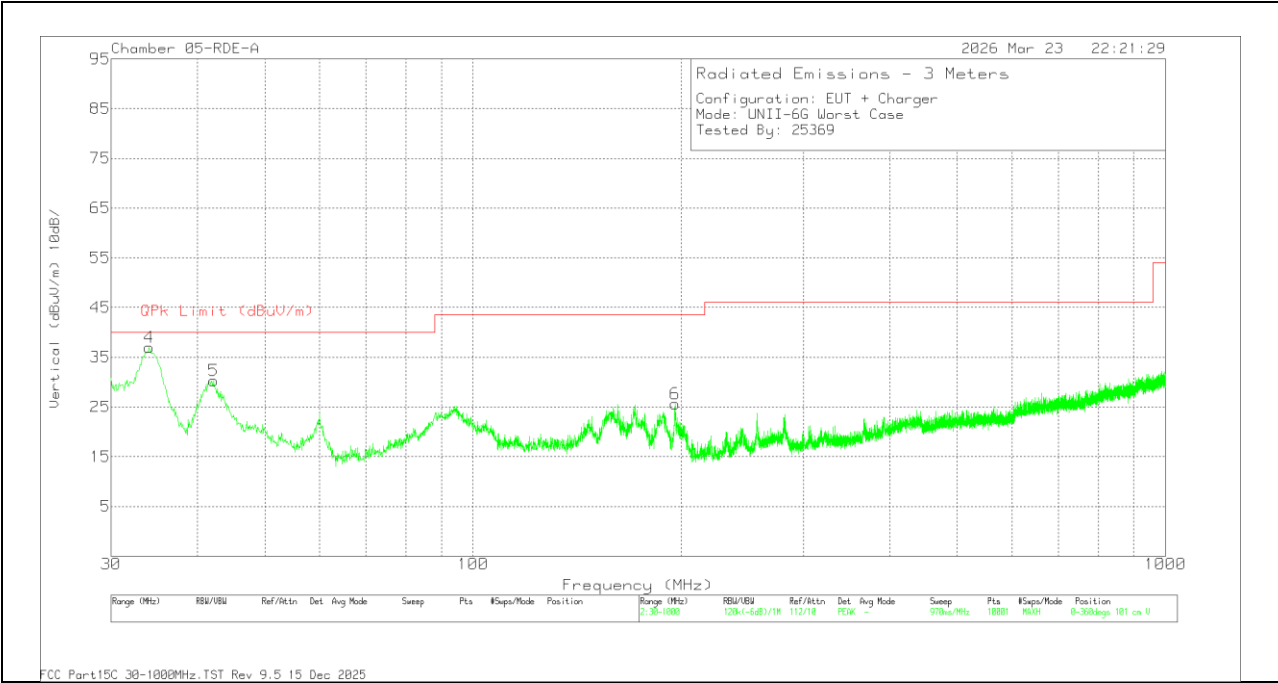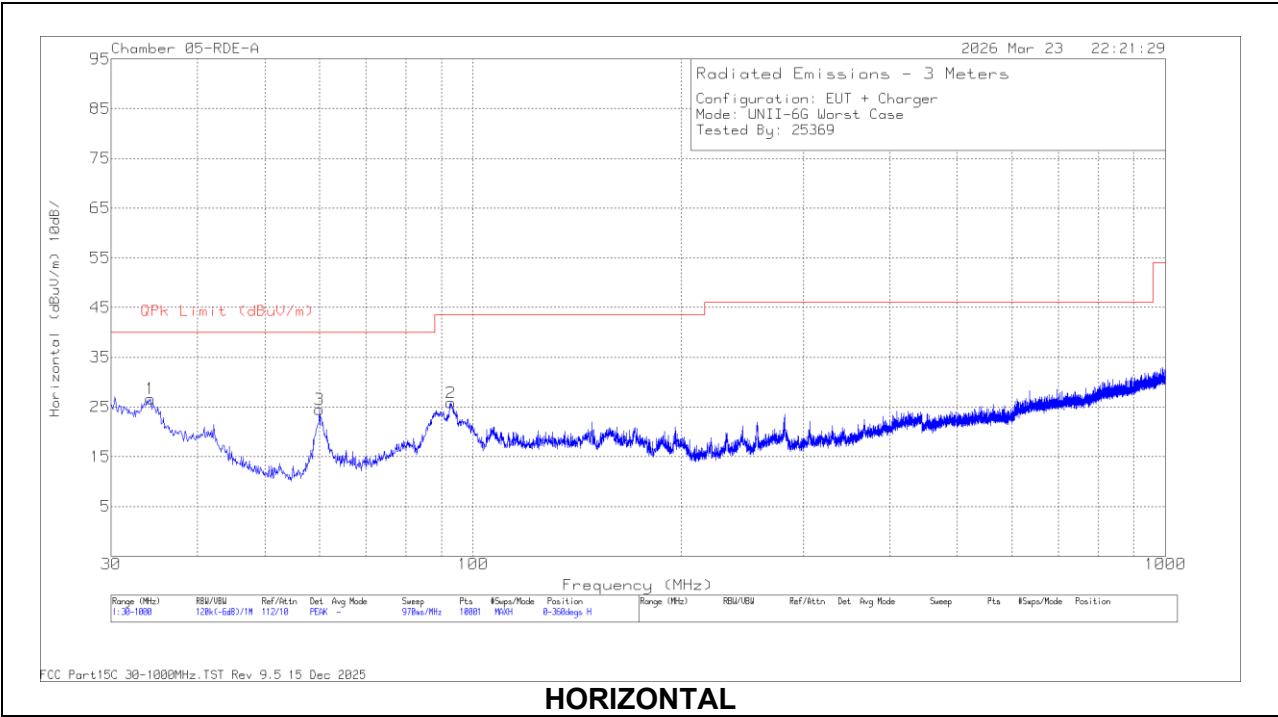

RADIATED EMISSIONS**STATE A**

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	204045 ACF (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	30.194	32.31	Pk	26.7	-32.3	26.71	40	-13.29	0-360	399	H
4	34.4152	41.14	Qp	23.8	-32.3	32.64	40	-7.36	212	113	V
5	43.386	43.4	Pk	17.2	-32.2	28.4	40	-11.6	0-360	101	V
2	97.803	42.98	Pk	15.6	-31.7	26.88	43.52	-16.64	0-360	199	H
6	196.064	40.56	Pk	18.2	-31.2	27.56	43.52	-15.96	0-360	101	V
3	196.161	36.48	Pk	18.2	-31.2	23.48	43.52	-20.04	0-360	101	H



Pk - Peak detector

STATE B


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	204045 ACF (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	33.9709	41.21	Qp	24.1	-32.3	33.01	40	-6.99	166	102	V
1	34.171	34.96	Pk	24	-32.3	26.66	40	-13.34	0-360	101	H
5	42.222	44.37	Pk	18	-32.1	30.27	40	-9.73	0-360	101	V
3	59.973	43	Pk	13.5	-32	24.5	40	-15.5	0-360	399	H
2	92.856	43.32	Pk	14.3	-31.8	25.82	43.52	-17.7	0-360	199	H
6	195.967	38.65	Pk	18.2	-31.2	25.65	43.52	-17.87	0-360	101	V

Pk - Peak detector


1.4. WORST CASE 18-26 GHz
STATE A

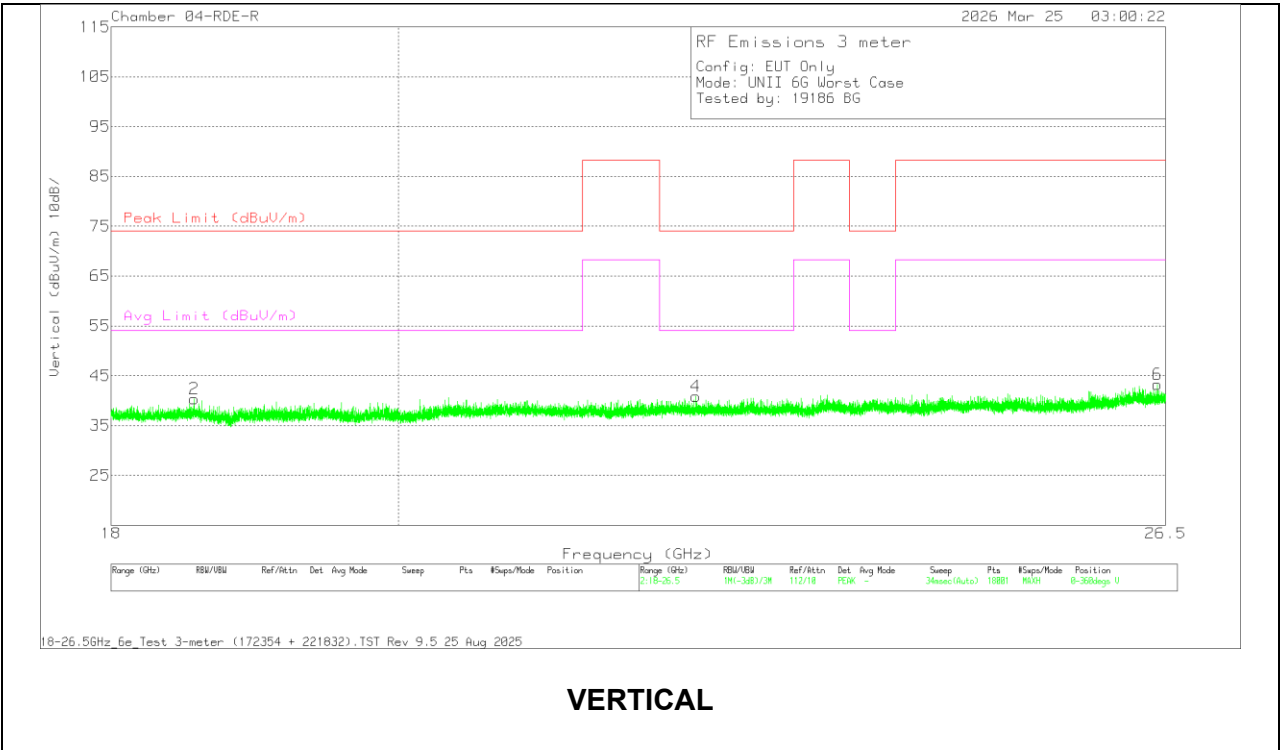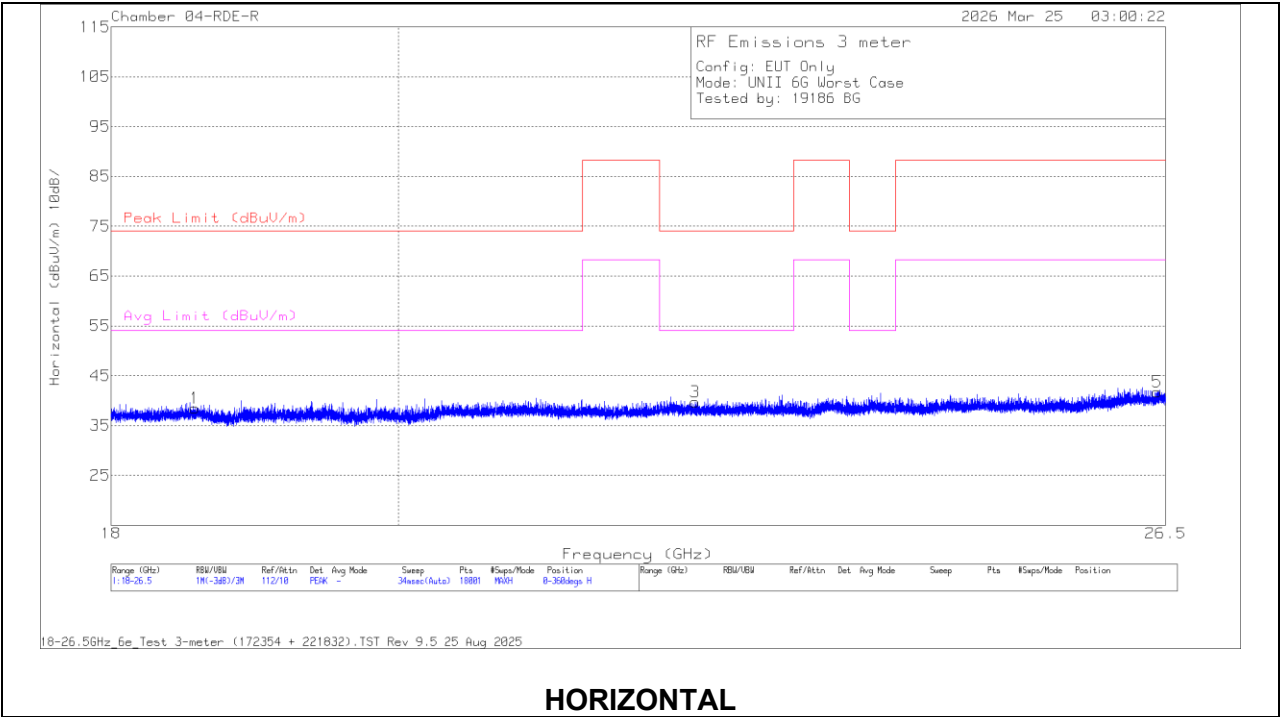

STATE B

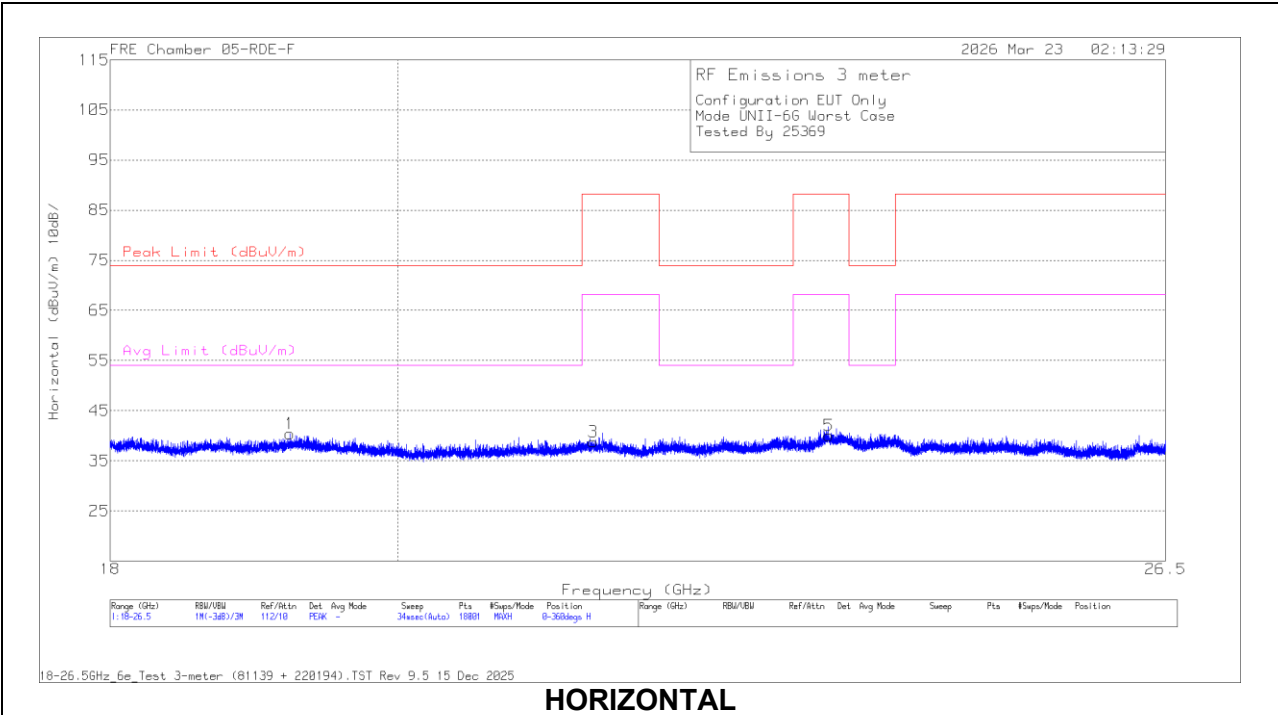

HORIZONTAL

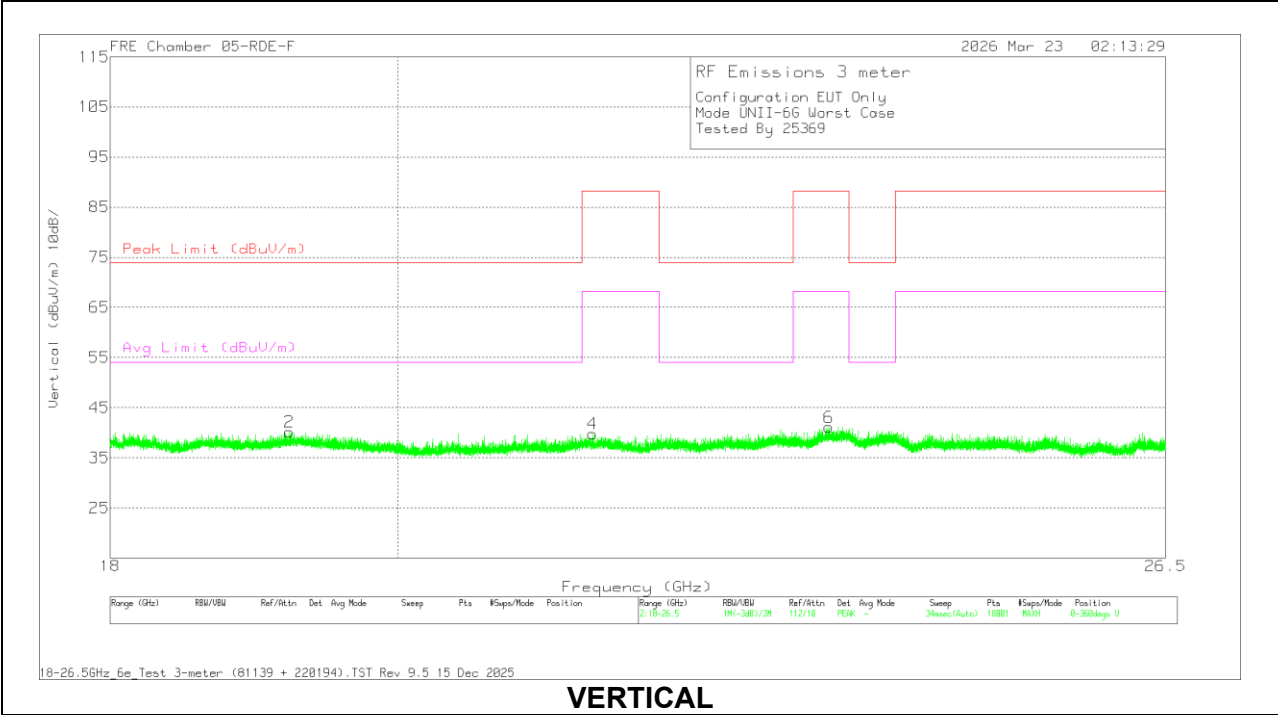

VERTICAL

RADIATED EMISSIONS**STATE A**

Frequency (GHz)	Meter Reading (dBuV)	Det	172354 3m AF (dB/m)	18-26GHz Amp	Cables (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Avg Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 18.555768	44.35	ADR	32.3	-63.2	15.8	29.25	-	-	54	-24.75	360	100	V
* 18.560075	55.74	PK-U	32.3	-63.2	15.8	40.64	74	-33.36	-	-	360	100	V
* 18.562668	44.29	ADR	32.3	-63.2	15.8	29.19	-	-	54	-24.81	360	100	H
* 18.565767	56.33	PK-U	32.3	-63.2	15.8	41.23	74	-32.77	-	-	360	100	H
* 22.299963	52.71	PK-U	33.1	-62.1	17.3	41.01	74	-32.99	-	-	360	100	H
* 22.30134	53.21	PK-U	33.1	-62.1	17.3	41.51	74	-32.49	-	-	360	100	V
* 22.301487	41.34	ADR	33.1	-62.1	17.3	29.64	-	-	54	-24.36	360	100	V
* 22.302462	41.34	ADR	33.1	-62.1	17.3	29.64	-	-	54	-24.36	360	100	H
26.419237	39.37	ADR	34.2	-60.8	19.1	31.87	-	-	68.2	-36.33	360	100	H
26.419472	51.1	PK-U	34.2	-60.8	19.1	43.6	88.2	-44.6	-	-	360	100	H
26.421571	51.15	PK-U	34.2	-60.8	19.1	43.65	88.2	-44.55	-	-	360	100	V
26.422876	39.24	ADR	34.2	-60.8	19.1	31.74	-	-	68.2	-36.46	360	100	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

STATE B

Frequency (GHz)	Meter Reading (dBuV)	Det	81139 ACF (dB/m)	CBL/AMP (dB)	Cbl (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Avg Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 19.226614	57.98	PK-U	32.6	-62.3	13.3	0	41.58	74	-32.42	-	-	0	200	H
* 19.226832	45.87	ADR	32.6	-62.3	13.3	0	29.47	-	-	54	-24.53	0	200	H
21.485135	56.37	PK-U	33.3	-62.5	14.1	0	41.27	88.2	-46.93	-	-	0	101	H
21.486807	44.01	ADR	33.3	-62.5	14.1	0	28.91	-	-	68.2	-39.29	0	101	H
23.427862	56.95	PK-U	33.6	-62.7	14.7	0	42.55	88.2	-45.65	-	-	0	101	H
23.427169	44.84	ADR	33.6	-62.7	14.7	0	30.44	-	-	68.2	-37.76	0	101	H
* 19.222426	57.87	PK-U	32.6	-62.3	13.3	0	41.47	74	-32.53	-	-	0	200	V
* 19.224532	45.81	ADR	32.6	-62.3	13.3	0	29.41	-	-	54	-24.59	0	200	V
21.484306	55.8	PK-U	33.3	-62.5	14.1	0	40.7	88.2	-47.5	-	-	0	200	V
21.484074	44.12	ADR	33.3	-62.5	14.1	0	29.02	-	-	68.2	-39.18	0	200	V
23.424688	57.01	PK-U	33.6	-62.7	14.7	0	42.61	88.2	-45.59	-	-	0	200	V
23.427618	44.97	ADR	33.6	-62.7	14.7	0	30.57	-	-	68.2	-37.63	0	200	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1.5. WORST CASE 26-40 GHz

STATE A

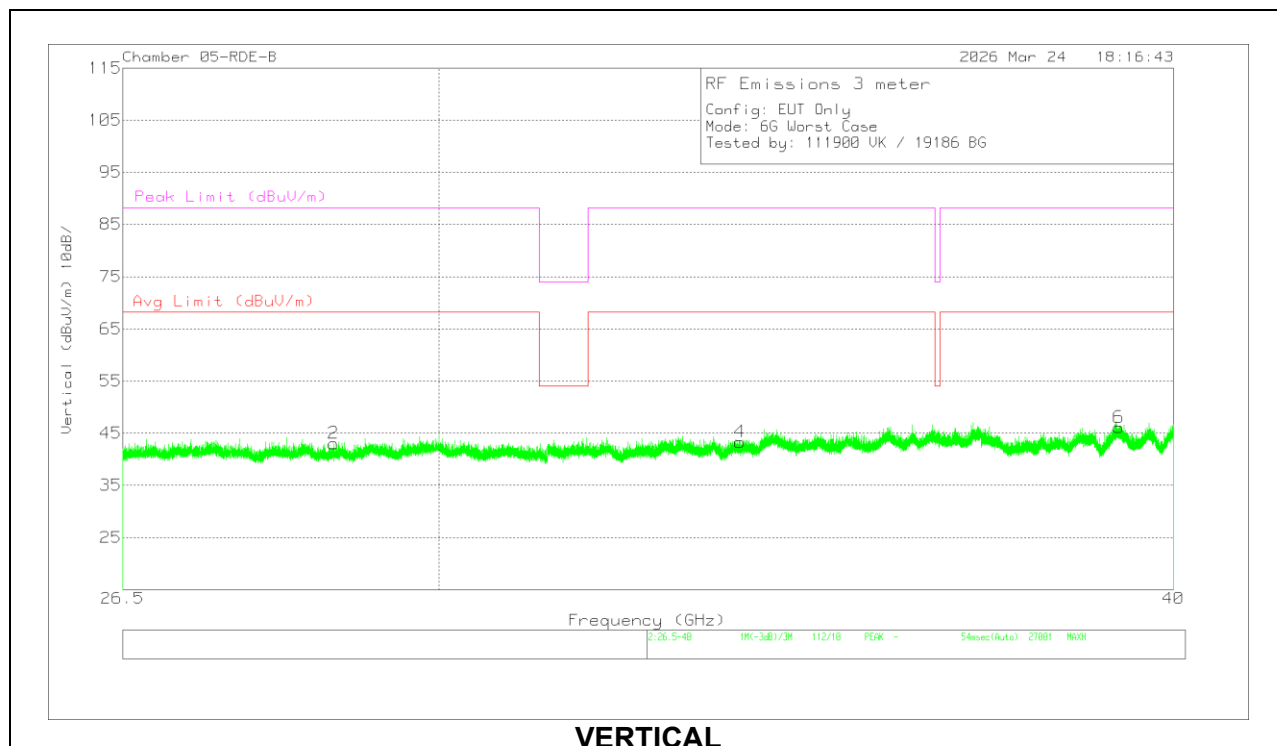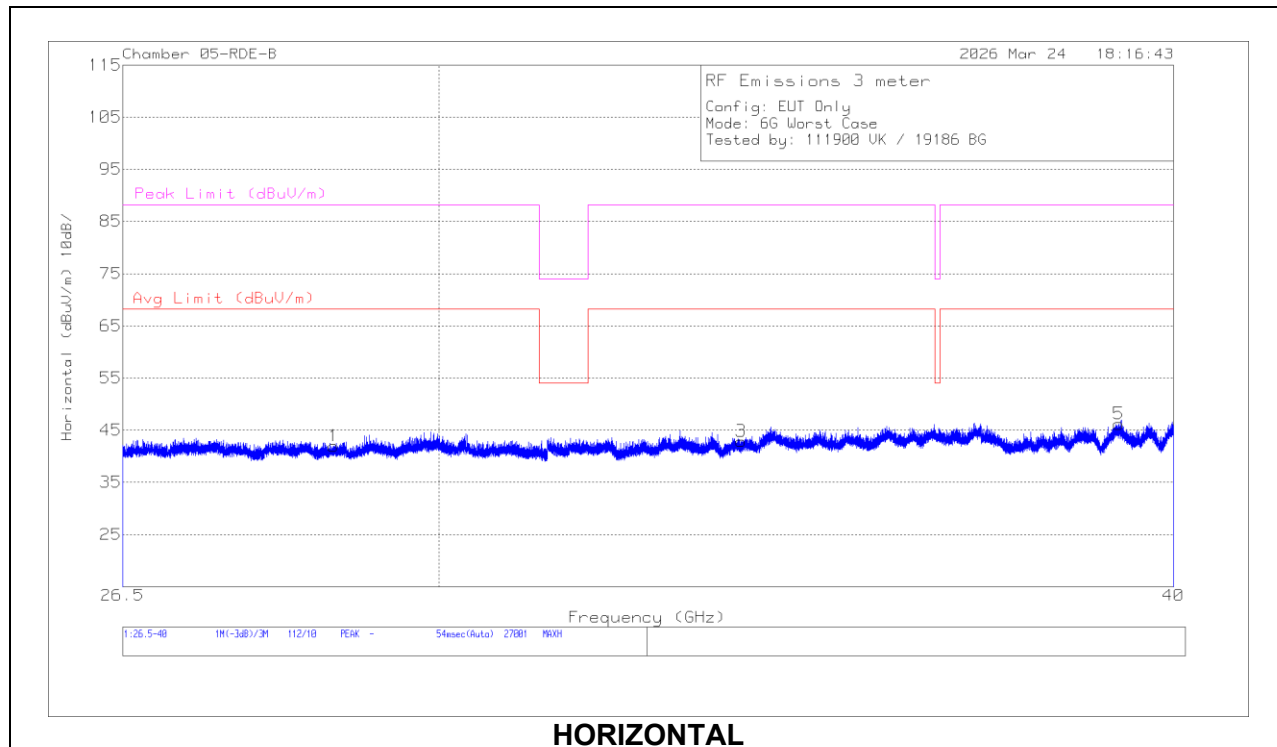



RADIATED EMISSIONS

Frequency (GHz)	Meter Reading (dBuV)	Det	172366 ACF (dB/m)	CBL/AMP (dB)	Cbl (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 39.153222	60.13	PK-U	38.2	-70.1	20	0	48.23	-	-	74	-25.77	0	101	H
* 39.152432	48.51	ADR	38.2	-70.1	20	0	36.61	54	-17.39	-	-	0	101	H
* 39.153671	60.41	PK-U	38.2	-70.1	20	0	48.51	-	-	74	-25.49	0	199	V
* 39.152303	48.61	ADR	38.2	-70.1	20	0	36.71	54	-17.29	-	-	0	199	V
28.783749	51.99	ADR	35.9	-72.1	17	0	32.79	68.2	-35.41	-	-	0	199	H
28.785131	63.6	PK-U	35.9	-72.1	17	0	44.4	-	-	88.2	-43.8	0	199	H
28.785202	51.89	ADR	35.9	-72.1	17	0	32.69	68.2	-35.51	-	-	0	199	V
28.785482	64.05	PK-U	35.9	-72.1	17	0	44.85	-	-	88.2	-43.35	0	199	V
33.750863	51.37	ADR	36.9	-72.3	18.7	0	34.67	68.2	-33.53	-	-	0	101	V
33.753068	62.88	PK-U	36.9	-72.3	18.7	0	46.18	-	-	88.2	-42.02	0	101	V
33.765819	51.45	ADR	36.9	-72.4	18.7	0	34.65	68.2	-33.55	-	-	0	101	H
33.767305	63.09	PK-U	36.9	-72.4	18.7	0	46.29	-	-	88.2	-41.91	0	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

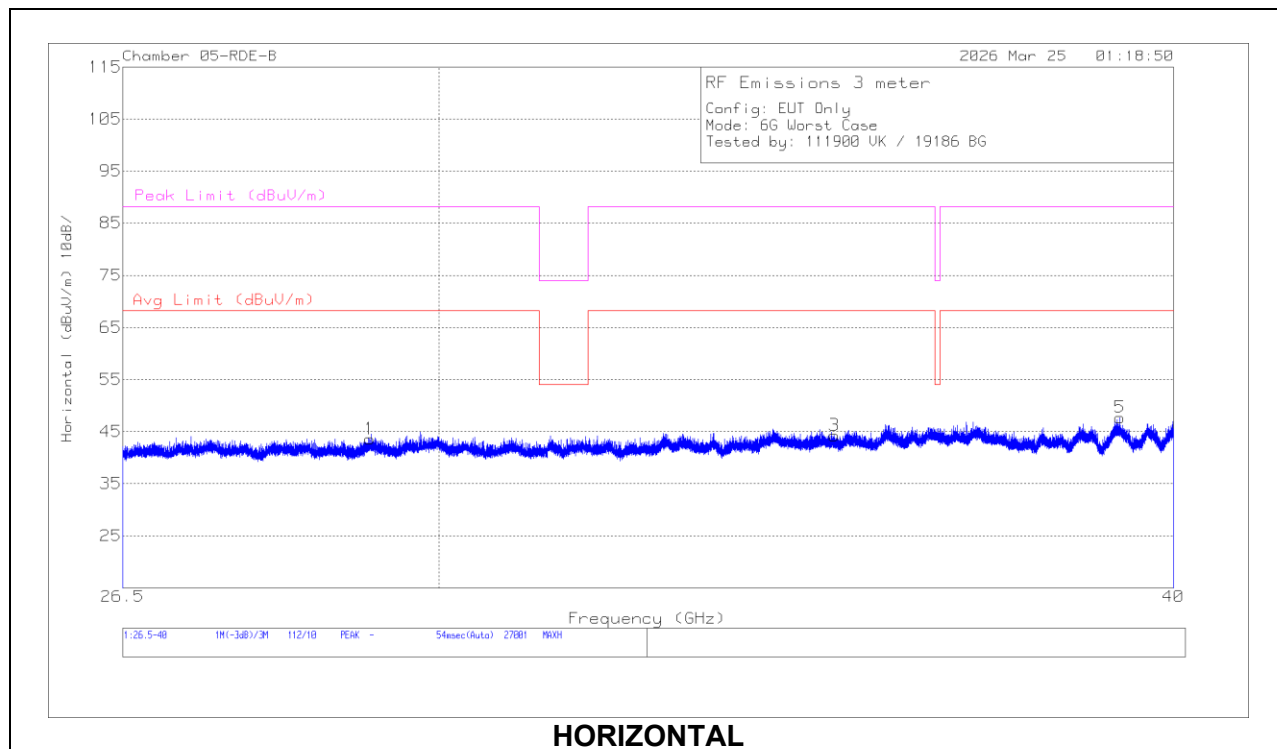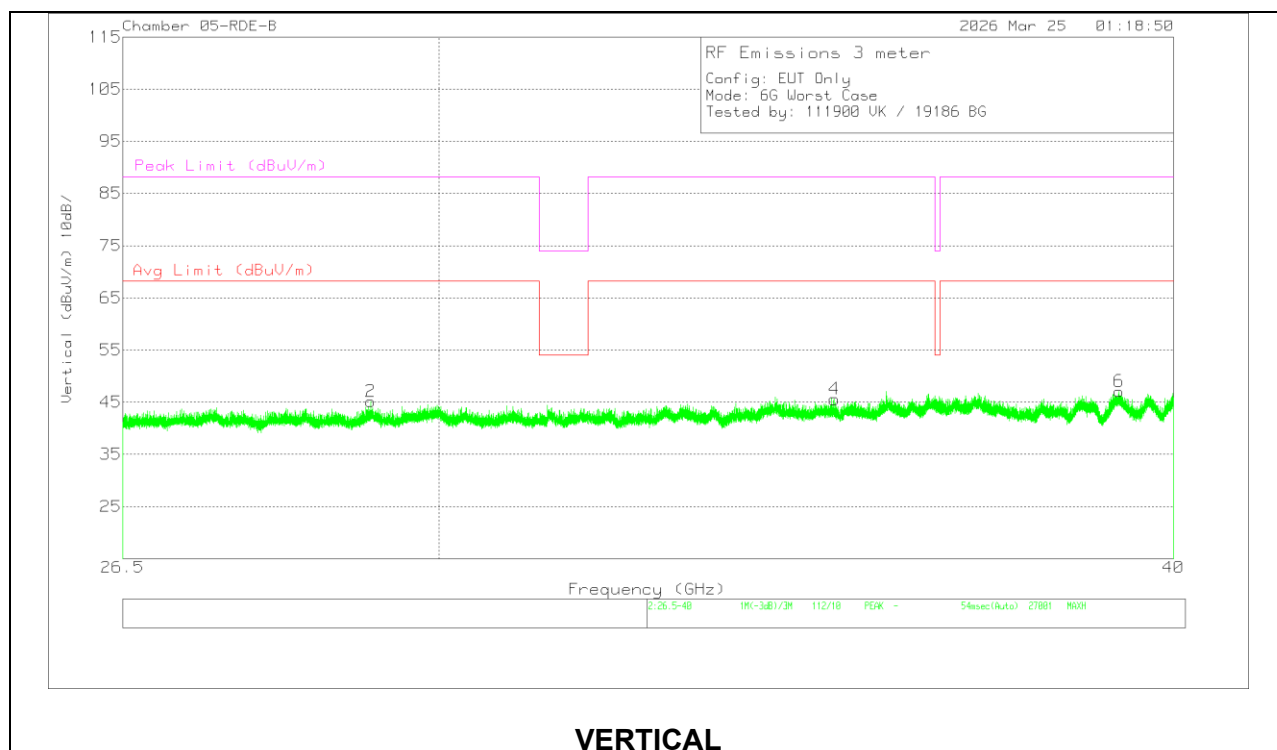STATE B**HORIZONTAL****VERTICAL**

RADIATED EMISSIONS

Frequency (GHz)	Meter Reading (dBuV)	Det	172366 ACF (dB/m)	CBL/AMP (dB)	Cbl (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 39.170617	60.38	PK-U	38.2	-70.2	20	0	48.38	-	-	74	-25.62	1	101	H
* 39.168026	48.84	ADR	38.2	-70.2	20	0	36.84	54	-17.16	-	-	1	101	H
* 39.159191	60.24	PK-U	38.2	-70.2	20	0	48.24	-	-	74	-25.76	1	101	V
* 39.157243	48.75	ADR	38.2	-70.1	20	0	36.85	54	-17.15	-	-	1	101	V
29.195246	62.96	PK-U	36.1	-71.2	17.4	0	45.26	-	-	88.2	-42.94	1	101	H
29.196079	51.42	ADR	36.1	-71.2	17.4	0	33.72	68.2	-34.48	-	-	1	101	H
29.208716	51.41	ADR	36.1	-71.2	17.4	0	33.71	68.2	-34.49	-	-	1	200	V
29.209587	63.3	PK-U	36.1	-71.2	17.4	0	45.6	-	-	88.2	-42.6	1	200	V
35.023738	64.95	PK-U	37.1	-73.6	18.8	0	47.25	-	-	88.2	-40.95	1	101	H
35.024482	53.27	ADR	37.1	-73.6	18.8	0	35.57	68.2	-32.63	-	-	1	101	H
35.026057	53.18	ADR	37.1	-73.7	18.8	0	35.38	68.2	-32.82	-	-	1	101	V
35.026727	65.06	PK-U	37.1	-73.7	18.8	0	47.26	-	-	88.2	-40.94	1	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

2. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 8.8

Frequency of Emission (MHz)	Conducted Limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.


The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL(L2) and HOT(L1) lines.

RESULTS


2.1. EUT WITH AC ADAPTER
LINE 1 RESULTS

STATE A

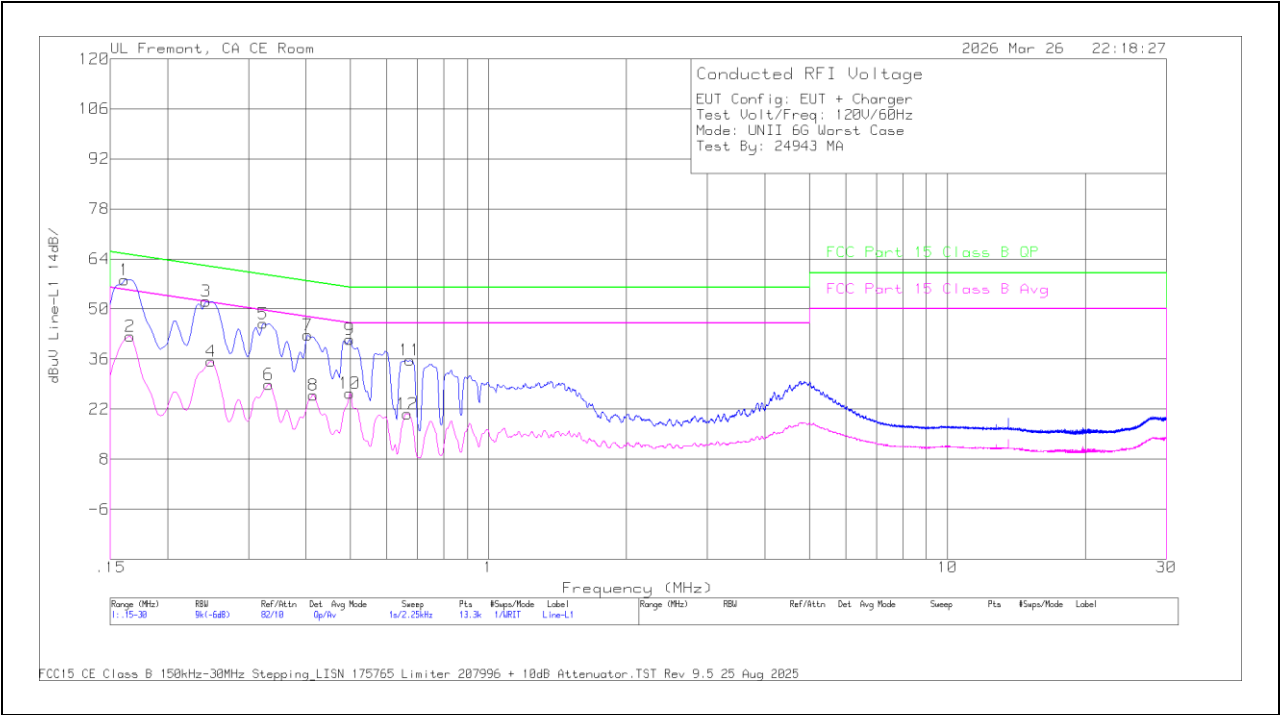

LINE 1 RESULTS

STATE B

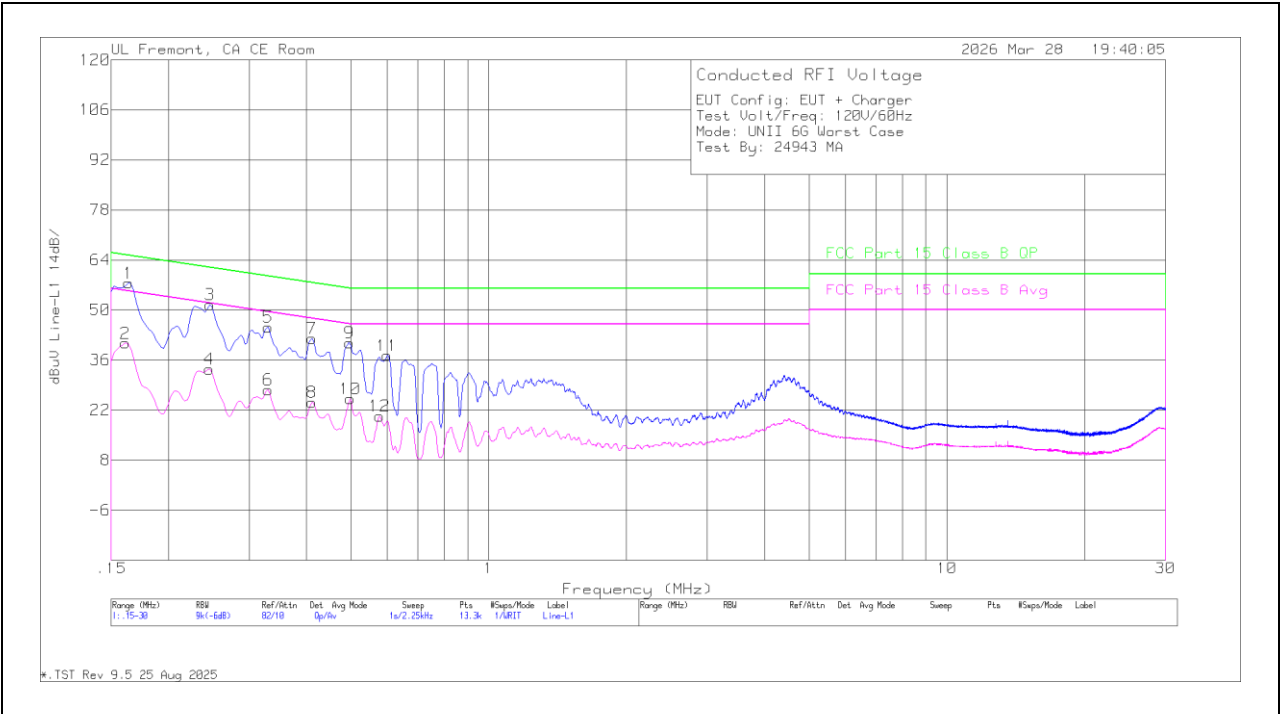

Trace Markers**STATE A**

Range 1: Line-L1 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN (dB)	Line 1 C3_C1_plu s Limiter	Attenuator	Corrected Reading dBuV	FCC Part 15 Class B QP	QP Margin (dB)	FCC Part 15 Class B Avg	Av Margin (dB)
2	.1658	22.92	Av	.1	9.4	9.9	42.32	-	-	55.17	-12.85
4	.249	16.12	Av	0	9.4	9.9	35.42	-	-	51.79	-16.37
6	.3323	9.68	Av	0	9.3	9.9	28.88	-	-	49.39	-20.51
8	.4155	6.74	Av	0	9.3	9.9	25.94	-	-	47.54	-21.6
10	.4988	7.21	Av	0	9.3	9.9	26.41	-	-	46.02	-19.61
12	.6664	1.31	Av	0	9.4	10	20.71	-	-	46	-25.29
1	.1613	38.82	Qp	.1	9.4	9.9	58.22	65.4	-7.18	-	-
3	.2423	32.83	Qp	0	9.4	9.9	52.13	62.02	-9.89	-	-
5	.3233	26.66	Qp	0	9.4	9.9	45.96	59.62	-13.66	-	-
7	.4043	23.51	Qp	0	9.3	9.9	42.71	57.77	-15.06	-	-
9	.4988	22.35	Qp	0	9.3	9.9	41.55	56.02	-14.47	-	-
11	.6743	16.27	Qp	0	9.4	10	35.67	56	-20.33	-	-


Qp - Quasi-Peak detecto

Av - Average detection


STATE B

Range 1: Line-L1 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN (dB)	Line 1 C3_C1_plu s Limiter	Attenuator	Corrected Reading dBuV	FCC Part 15 Class B QP	QP Margin (dB)	FCC Part 15 Class B Avg	Av Margin (dB)
2	.1613	21.31	Av	.1	9.4	9.9	40.71	-	-	55.4	-14.69
4	.2456	14.18	Av	0	9.4	9.9	33.48	-	-	51.9	-18.42
6	.33	8.39	Av	0	9.3	9.9	27.59	-	-	49.45	-21.86
8	.4121	4.97	Av	0	9.3	9.9	24.17	-	-	47.61	-23.44
10	.4988	5.92	Av	0	9.3	9.9	25.12	-	-	46.02	-20.9
12	.5775	1.07	Av	0	9.3	9.9	20.27	-	-	46	-25.73
1	.1635	38.13	Qp	.1	9.4	9.9	57.53	65.28	-7.75	-	-
3	.2468	32.12	Qp	0	9.4	9.9	51.42	61.87	-10.45	-	-
5	.33	25.97	Qp	0	9.3	9.9	45.17	59.45	-14.28	-	-
7	.411	22.88	Qp	0	9.3	9.9	42.08	57.63	-15.55	-	-
9	.4965	21.59	Qp	0	9.3	9.9	40.79	56.06	-15.27	-	-
11	.6	18.02	Qp	0	9.3	9.9	37.22	56	-18.78	-	-

LINE 2 RESULTS
STATE A

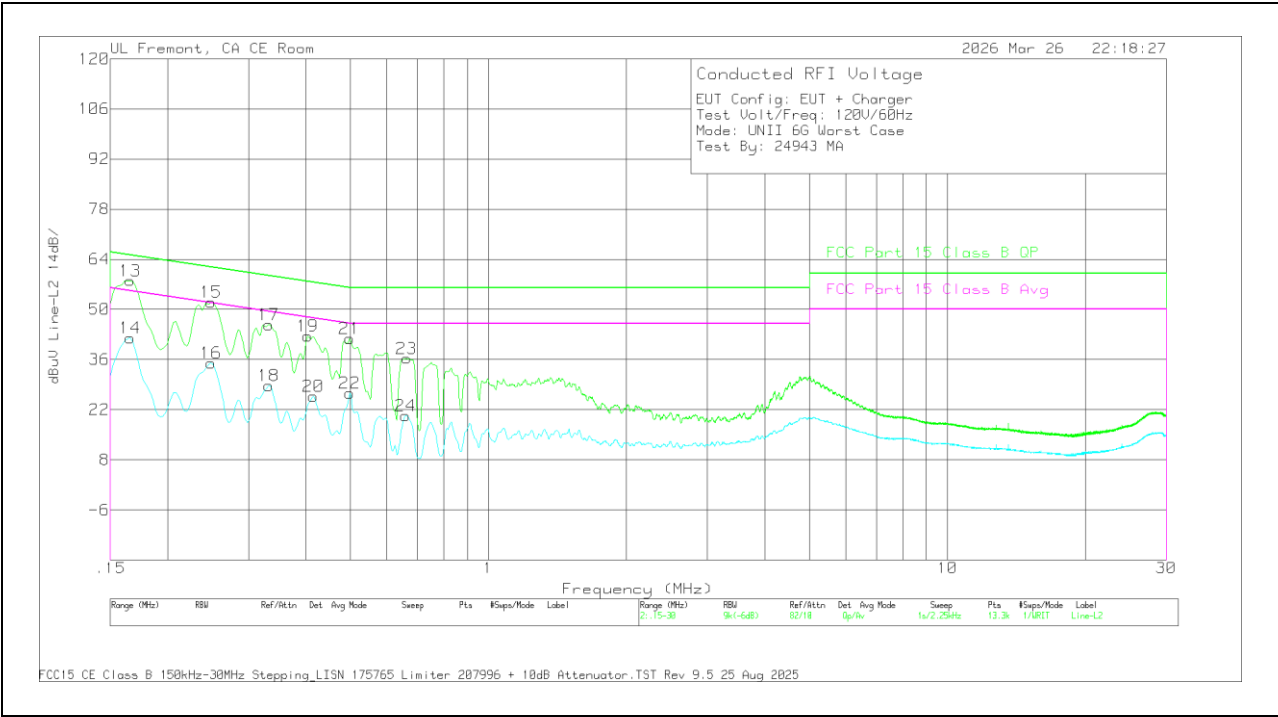

LINE 2 RESULTS
STATE B

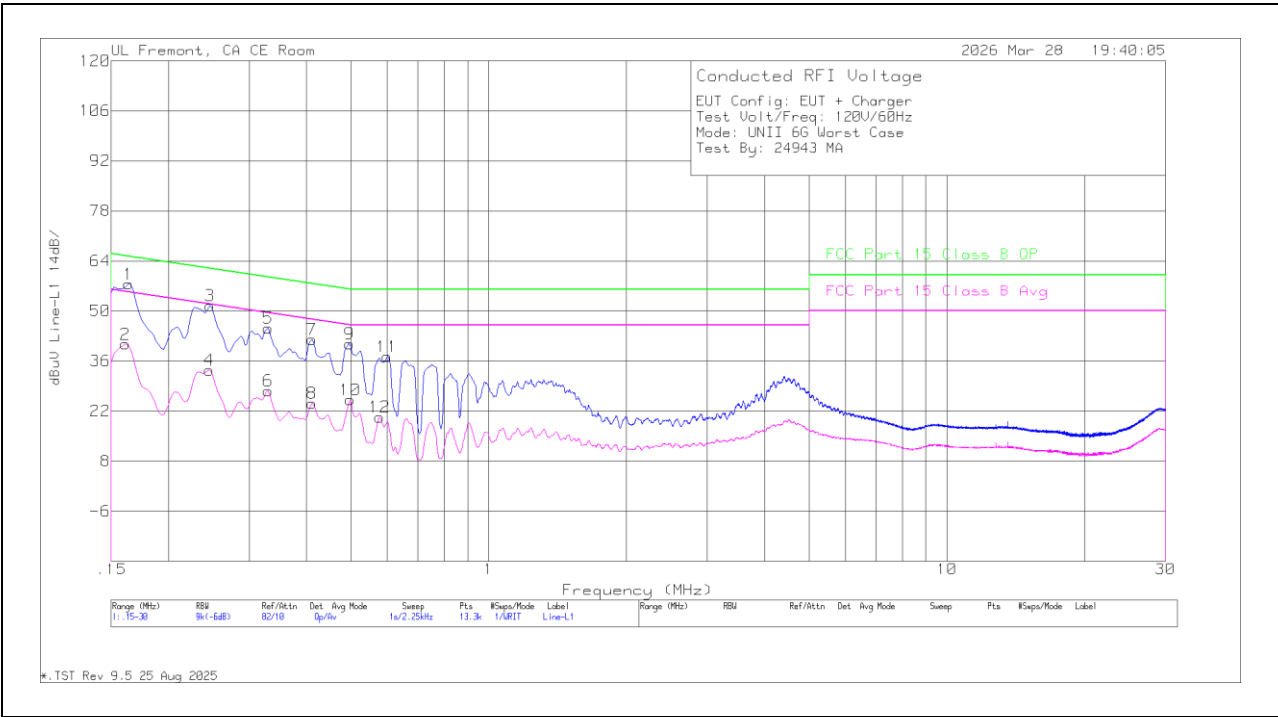

Trace Markers

STATE A

Range 2: Line-L2 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBUV)	Det	LISN (dB)	Line 2 C3_C2_plus Limiter	Attenuator	Corrected Reading dBUV	FCC Part 15 Class B QP	QP Margin (dB)	FCC Part 15 Class B Avg	Av Margin (dB)
14	.1658	22.58	Av	.1	9.4	9.9	41.98	-	-	55.17	-13.19
16	.249	15.78	Av	0	9.4	9.9	35.08	-	-	51.79	-16.71
18	.3323	9.57	Av	0	9.3	9.9	28.77	-	-	49.39	-20.62
20	.4155	6.46	Av	0	9.3	9.9	25.66	-	-	47.54	-21.88
22	.4988	7.39	Av	0	9.3	9.9	26.59	-	-	46.02	-19.43
24	.6608	.88	Av	0	9.4	10	20.28	-	-	46	-25.72
13	.1658	38.65	Qp	.1	9.4	9.9	58.05	65.17	-7.12	-	-
15	.249	32.65	Qp	0	9.4	9.9	51.95	61.79	-9.84	-	-
17	.3323	26.55	Qp	0	9.3	9.9	45.75	59.39	-13.64	-	-
19	.4043	23.32	Qp	0	9.3	9.9	42.52	57.77	-15.25	-	-
21	.4988	22.64	Qp	0	9.3	9.9	41.84	56.02	-14.18	-	-
23	.663	16.92	Qp	0	9.4	10	36.32	56	-19.68	-	-

STATE B


Range 2: Line-L2 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBUV)	Det	LISN (dB)	Line 2 C3_C2_plus Limiter	Attenuator	Corrected Reading dBUV	FCC Part 15 Class B QP	QP Margin (dB)	FCC Part 15 Class B Avg	Av Margin (dB)
14	.1613	21.74	Av	.1	9.4	9.9	41.14	-	-	55.4	-14.26
16	.2445	14.67	Av	0	9.4	9.9	33.97	-	-	51.94	-17.97
18	.33	8.63	Av	0	9.3	9.9	27.83	-	-	49.45	-21.62
20	.4133	6.3	Av	0	9.3	9.9	25.5	-	-	47.58	-22.08
22	.4988	6.02	Av	0	9.3	9.9	25.22	-	-	46.02	-20.8
24	.5775	1.93	Av	0	9.3	9.9	21.13	-	-	46	-24.87
13	.1635	38.19	Qp	.1	9.4	9.9	57.59	65.28	-7.69	-	-
15	.2468	32.25	Qp	0	9.4	9.9	51.55	61.87	-10.32	-	-
17	.33	26.13	Qp	0	9.3	9.9	45.33	59.45	-14.12	-	-
19	.411	22.96	Qp	0	9.3	9.9	42.16	57.63	-15.47	-	-
21	.4943	21.31	Qp	0	9.3	9.9	40.51	56.1	-15.59	-	-
23	.5753	18.14	Qp	0	9.3	9.9	37.34	56	-18.66	-	-

Qp - Quasi-Peak detector


Av - Average detection

2.2. EUT WITH LAPTOP

LINE 1 RESULTS
STATE A

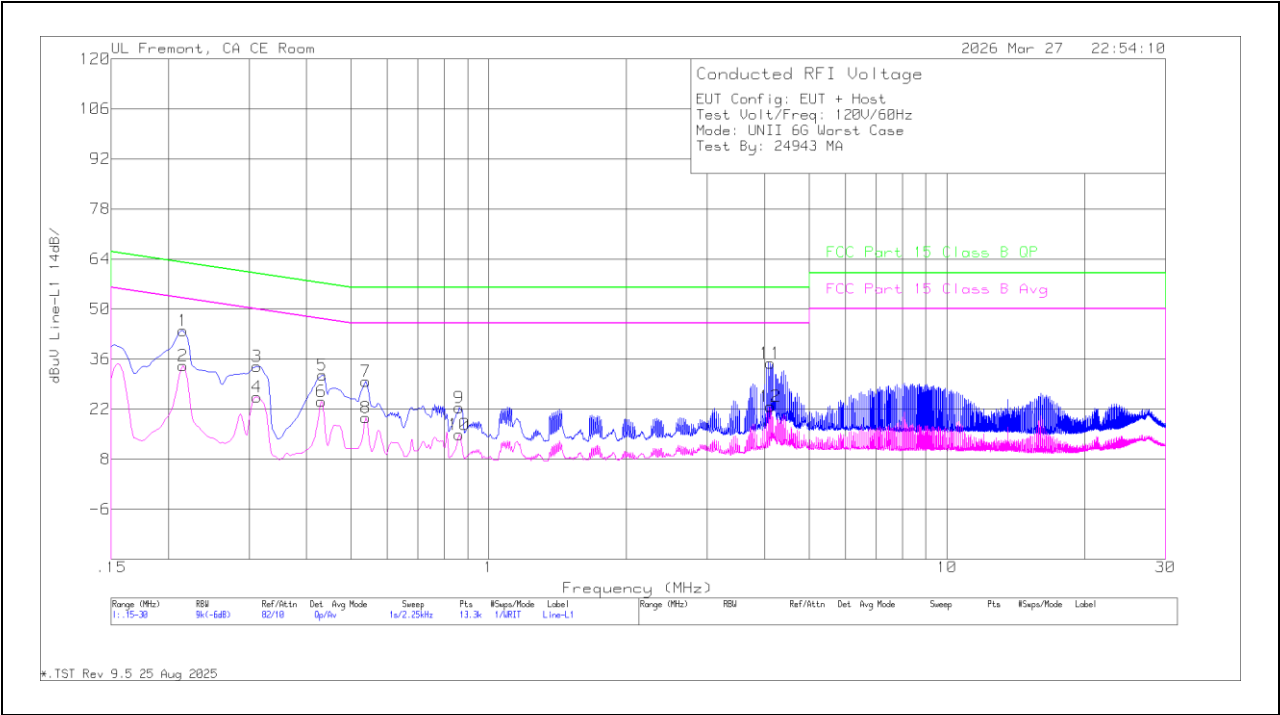

LINE 1 RESULTS
STATE B

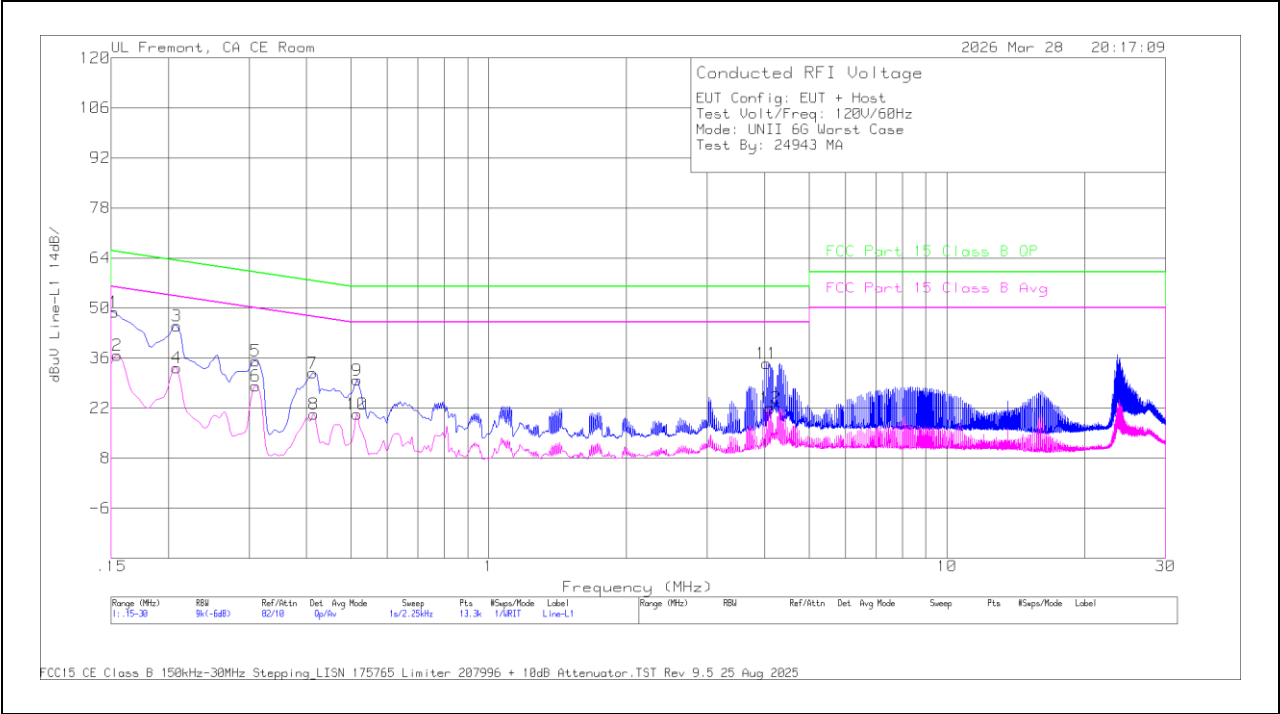



Trace Markers

STATE A

Range 1: Line-L1 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN (dB)	Line 1 C3_C1_plus Limiter	Attenuator	Corrected Reading dBuV	FCC Part 15 Class B QP	QP Margin (dB)	FCC Part 15 Class B Avg	Av Margin (dB)
2	.2153	14.83	Av	0	9.4	9.9	34.13	-	-	53	-18.87
4	.312	6.07	Av	0	9.4	9.9	25.37	-	-	49.92	-24.55
6	.4313	4.99	Av	0	9.3	9.9	24.19	-	-	47.23	-23.04
8	.5393	.41	Av	0	9.3	9.9	19.61	-	-	46	-26.39
10	.8621	-4.45	Av	0	9.4	9.9	14.85	-	-	46	-31.15
12	4.1235	3.42	Av	0	9.4	9.9	22.72	-	-	46	-23.28
1	.2153	24.72	Qp	0	9.4	9.9	44.02	63	-18.98	-	-
3	.312	14.65	Qp	0	9.4	9.9	33.95	59.92	-25.97	-	-
5	.4335	12.36	Qp	0	9.3	9.9	31.56	57.19	-25.63	-	-
7	.5393	10.5	Qp	0	9.3	9.9	29.7	56	-26.3	-	-
9	.8633	3.1	Qp	0	9.4	9.9	22.4	56	-33.6	-	-
11	4.1235	15.6	Qp	0	9.4	9.9	34.9	56	-21.1	-	-

STATE B

Range 1: Line-L1 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN (dB)	Line 1 C3_C1_plus Limiter	Attenuator	Corrected Reading dBuV	FCC Part 15 Class B QP	QP Margin (dB)	FCC Part 15 Class B Avg	Av Margin (dB)
2	.1545	17.3	Av	.1	9.4	9.9	36.7	-	-	55.75	-19.05
4	.2085	13.96	Av	0	9.4	9.9	33.26	-	-	53.26	-20
6	.3098	8.88	Av	0	9.4	9.9	28.18	-	-	49.98	-21.8
8	.4155	1.03	Av	0	9.3	9.9	20.23	-	-	47.54	-27.31
10	.5168	1.15	Av	0	9.3	9.9	20.35	-	-	46	-25.65
12	4.1235	2.71	Av	0	9.4	9.9	22.01	-	-	46	-23.99
1	.1523	29.52	Qp	.1	9.4	9.9	48.92	65.88	-16.96	-	-
3	.2085	25.74	Qp	0	9.4	9.9	45.04	63.26	-18.22	-	-
5	.3098	15.92	Qp	0	9.4	9.9	35.22	59.98	-24.76	-	-
7	.4133	12.57	Qp	0	9.3	9.9	31.77	57.58	-25.81	-	-
9	.5168	10.64	Qp	0	9.3	9.9	29.84	56	-26.16	-	-
11	4.0425	15.16	Qp	0	9.4	9.9	34.46	56	-21.54	-	-

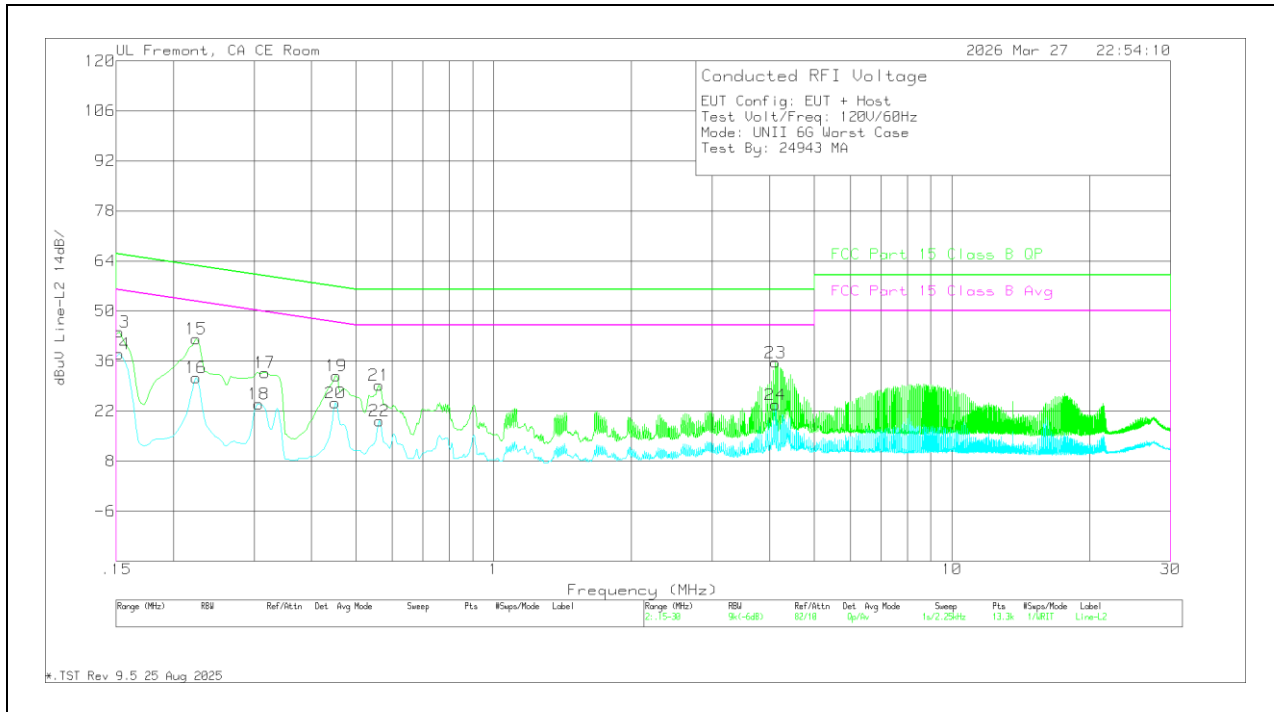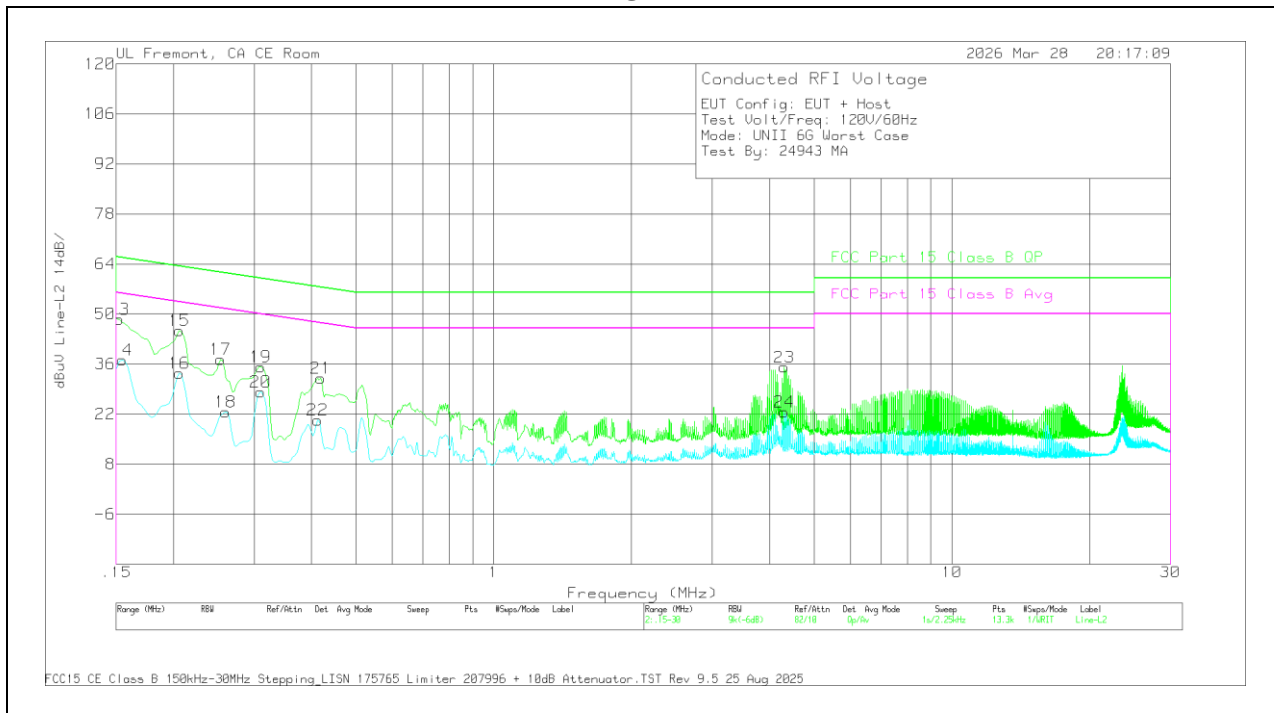**LINE 2 RESULTS
STATE A****LINE 2 RESULTS
STATE B**

STATE A

Range 2: Line-L2 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN (dB)	Line 2 C3_C2_plus Limiter (dB)	Attenuator (dB)	Corrected Reading dBuV	FCC Part 15 Class B QP (dBuV)	QP Margin (dB)	FCC Part 15 Class B Avg (dBuV)	Av Margin (dB)
14	.1523	18.56	Av	.1	9.4	9.9	37.96	-	-	55.88	-17.92
16	.2243	12.03	Av	0	9.4	9.9	31.33	-	-	52.66	-21.33
18	.3075	4.71	Av	0	9.4	9.9	24.01	-	-	50.04	-26.03
20	.4515	5.05	Av	0	9.3	9.9	24.25	-	-	46.85	-22.6
22	.5629	-.08	Av	0	9.4	9.9	19.22	-	-	46	-26.78
24	4.1213	4.42	Av	0	9.4	9.9	23.72	-	-	46	-22.28
13	.1523	24.72	Qp	.1	9.4	9.9	44.12	65.88	-21.76	-	-
15	.2243	22.93	Qp	0	9.4	9.9	42.23	62.66	-20.43	-	-
17	.3165	13.48	Qp	0	9.4	9.9	32.78	59.8	-27.02	-	-
19	.4538	12.61	Qp	0	9.3	9.9	31.81	56.81	-25	-	-
21	.5618	9.96	Qp	0	9.4	9.9	29.26	56	-26.74	-	-
23	4.1235	16.32	Qp	0	9.4	9.9	35.62	56	-20.38	-	-

STATE B

Range 2: Line-L2 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN (dB)	Line 2 C3_C2_plus Limiter (dB)	Attenuator (dB)	Corrected Reading dBuV	FCC Part 15 Class B QP (dBuV)	QP Margin (dB)	FCC Part 15 Class B Avg (dBuV)	Av Margin (dB)
14	.1545	17.68	Av	.1	9.4	9.9	37.08	-	-	55.75	-18.67
16	.2063	14.1	Av	0	9.4	9.9	33.4	-	-	53.35	-19.95
18	.2603	3.26	Av	0	9.4	9.9	22.56	-	-	51.42	-28.86
20	.3098	8.85	Av	0	9.4	9.9	28.15	-	-	49.98	-21.83
22	.4133	1.12	Av	0	9.3	9.9	20.32	-	-	47.58	-27.26
24	4.3103	3.37	Av	0	9.4	9.8	22.57	-	-	46	-23.43
13	.1523	29.18	Qp	.1	9.4	9.9	48.58	65.88	-17.3	-	-
15	.2063	26.08	Qp	0	9.4	9.9	45.38	63.35	-17.97	-	-
17	.2535	18.01	Qp	0	9.4	9.9	37.31	61.64	-24.33	-	-
19	.3098	15.89	Qp	0	9.4	9.9	35.19	59.98	-24.79	-	-
21	.42	12.82	Qp	0	9.3	9.9	32.02	57.45	-25.43	-	-
23	4.3103	15.91	Qp	0	9.4	9.8	35.11	56	-20.89	-	-

Qp - Quasi-Peak detector

Av - Average detection

3. SPOT CHECK EVALUATION

3.1. MODEL DIFFERENCES

The manufacturer hereby declares the following for models A3447, A3719, A3720, and A3721.

These models have the same PCB layout, design, common components, antennas, antenna locations and housing cases, except for FR2 is removed from variants and disabled/enabled cellular bands via software as shown below.

Model	FCC ID	IC ID	Feature Difference	Sim Support	Reference Model
A3447	BCG-E9188A	579C-E9188A	-With FR2 -No LTE B11, B21	eSIM	-
A3719	BCG-E9198A	579C-E9198A	-Without FR2 -Added LTE B11, B21	eSIM	A3447
A3720	BCG-E9203A	579C-E9203A	-Without FR2 -No LTE/5GNR B14, B29, B71 -No LTE B11, B21	eSIM	
A3721	BCG-E9204A	579C-E9204A	-Without FR2 -No LTE/5GNR B14, B29, B71, B53 -No LTE B11, B21, MSS	eSIM	

Note:

- All Models use the same System, Cellular and Connectivity radio electrical schematics.
- Removal of LTE bands on models not supporting them, is done by de-population of related components. Electrically there is no difference among the models.
- All Models use the same Applications Processor and PMU.
- All Models use the same UICC hardware/software interface.
- All Models run the same Baseband firmware and iOS software.

The spot check plan allows for data reuse from the reference model where the variant model data meets the limits and has not changed by more than the criteria from KDB 484596 D01 v03 equation (4).

$$d_{dBmax}(M_{dB}) = \begin{cases} (3 + M_{dB}/20) \text{ dB} & , \text{ for } 0 \leq M_{dB} \leq 60 \text{ dB} \\ 6 \text{ dB} & , \text{ for } M_{dB} > 60 \text{ dB} \end{cases} \quad (4)$$

Where: d_{dB} deviation from Reference data, V_{dB} variant spot check level, and R_{dB} measurement level

3.2. SPOT CHECK VERIFICATION RESULTS SUMMARY FOR A3719

STATE A

Equipment Class / Technology	Frequency (GHz)	Mode	Data Rate	Test Item		Channel	Measured Frequency (GHz)	Sub Model: A3447	Sub Model: A3719	Delta (dB)	Margin	Remarks
								FCC ID : BCG-E9188A IC : 579C-E9188A	FCC ID : BCG-E9198A IC : 579C-E9198A			
6CD / 6VL UNII-5 / 6 / 7 / 8	5925 - 6425 UNII-5	11be EHT160 SU (Ant 5)	MCS0	Avg Power (dBm)	Fundamental VLP	47 6185MHz	6.185	12.95	12.91	-0.04	-1.05	Note 1
	5925 - 6425 UNII-5	11be EHT80 SU (CDD)	MCS11	Radiated Bandedge (Avg. dBm)	Vertical Bandedge	7 5985MHz	5.920868	-30.10	-30.02	0.08	-3.10	Note 1
	5925 - 6425 UNII-5	11be EHT20 26T RU4 (CDD)	MCS0	RSE (Avg. dBuV/m)	1 - 18GHz	45 6175MHz	17.958522	44.40	44.39	0.01	-9.60	Note 1
	6425-6525 UNII-6	11be EHT160 SU (Ant 5)	MCS0	Avg Power (dBm)	Fundamental LP	111 6505MHz	6.505	18.13	18.15	0.02	-5.87	Note 1
	6425-6875 UNII-7	11be EHT40 SU (CDD)	MCS0	Avg Power (dBm)	Fundamental SP	147 6685MHz	6.685	23.14	22.77	-0.37	-6.86	Note 1
	6875-7125 UNII-8	11be EHT40 (CDD)	MCS11	Radiated Bandedge (Avg. dBm)	Vertical Bandedge	227 7085MHz	7.128334	-29.52	-29.11	0.41	-2.52	Note 1

Note 1: Deviation from reference to variant within the value allowed by equation (4) in KDB 484596. Additional tests not required.

Note 2: Deviation from reference to variant exceeds the value allowed by equation (4) in KDB 484596. Additional tests performed on second channel.

STATE B

Equipment Class / Technology	Frequency (GHz)	Mode	Data Rate	Test Item		Channel	Measured Frequency (GHz)	Sub Model: A3447	Sub Model: A3719	Delta (dB)	Margin	Remarks
								FCC ID : BCG-E9188A IC : 579C-E9188A	FCC ID : BCG-E9198A IC : 579C-E9198A			
6CD / 6VL UNII-5 / 6 / 7 / 8	5925 - 6425 UNII-5	11be EHT80 SU (CDD)	MCS0	RSE (Avg. dBuV/m)	1 - 18GHz	87 6385MHz	17.731181	44.41	45.98	1.57	-9.59	Note 1
	6425-6525 UNII-6	11be EHT160 SU (Ant 6)	MCS0	Avg Power (dBm)	Fundamental LP	111 6505MHz	6.505	18.14	18.17	0.03	-5.86	Note 1
	6425-6875 UNII-7	11be EHT160 996+484T S95 (CDD)	MCS0	Avg Power (dBm)	Fundamental SP	143 6665MHz	6.665	23.14	23.12	-0.02	-6.86	Note 1
	6875-7125 UNII-8	11be EHT160 SU (Ant 5)	MCS0	Avg Power (dBm)	Fundamental VLP	207 6985MHz	6.985	13.27	13.21	-0.06	-0.73	Note 1
	6875-7125 UNII-8	11a	54Mbps	Radiated Bandedge (Avg. dBm)	Vertical Bandedge	233 7115MHz	7.125068	-29.65	-31.16	-1.51	-2.65	Note 1

Note 1: Deviation from reference to variant within the value allowed by equation (4) in KDB 484596. Additional tests not required.

Note 2: Deviation from reference to variant exceeds the value allowed by equation (4) in KDB 484596. Additional tests performed on second channel.

3.3. SPOT CHECK VERIFICATION RESULTS SUMMARY FOR A3720

STATE A

Equipment Class / Technology	Frequency (GHz)	Mode	Data Rate	Test Item		Channel	Measured Frequency (GHz)	Sub Model: A3447	Sub Model: A3720	Delta (dB)	Margin	Remarks
								FCC ID : BCG-E9188A IC : 579C-E9188A	FCC ID : BCG-E9203A IC : 579C-E9203A			
6CD / 6VL UNII-5 / 6 / 7 / 8	5925 - 6425 UNII-5	11be EHT160 SU (Ant 5)	MCS0	Avg Power (dBm)	Fundamental VLP	47 6185MHz	6.185	12.95	12.89	-0.06	-1.05	Note 1
	5925 - 6425 UNII-5	11be EHT80 SU (CDD)	MCS11	Radiated Bandedge (Avg. dBm)	Vertical Bandedge	7 5985MHz	5.920868	-30.10	-29.59	0.51	-3.10	Note 1
	5925 - 6425 UNII-5	11be EHT20 26T RU4 (CDD)	MCS0	RSE (Avg. dBuV/m)	1 - 18GHz	45 6175MHz	17.958522	44.40	44.71	-0.31	-9.60	Note 1
	6425-6525 UNII-6	11be EHT160 SU (Ant 5)	MCS0	Avg Power (dBm)	Fundamental LP	111 6505MHz	6.505	18.13	18.15	0.02	-5.87	Note 1
	6425-6875 UNII-7	11be EHT40 SU (CDD)	MCS0	Avg Power (dBm)	Fundamental SP	147 6685MHz	6.685	23.14	22.81	-0.33	-6.86	Note 1
	6875-7125 UNII-8	11be EHT40 (CDD)	MCS11	Radiated Bandedge (Avg. dBm)	Vertical Bandedge	227 7085MHz	7.128334	-29.52	-30.14	-0.62	-2.52	Note 1

Note 1: Deviation from reference to variant within the value allowed by equation (4) in KDB 484596. Additional tests not required.

Note 2: Deviation from reference to variant exceeds the value allowed by equation (4) in KDB 484596. Additional tests performed on second channel.

STATE B

Equipment Class / Technology	Frequency (GHz)	Mode	Data Rate	Test Item		Channel	Measured Frequency (GHz)	Sub Model: A3447	Sub Model: A3720	Delta (dB)	Margin	Remarks
								FCC ID : BCG-E9188A IC : 579C-E9188A	FCC ID : BCG-E9203A IC : 579C-E9203A			
6CD / 6VL UNII-5 / 6 / 7 / 8	5925 - 6425 UNII-5	11be EHT80 SU (CDD)	MCS0	RSE (Avg. dBuV/m)	1 - 18GHz	87 6385MHz	17.731181	44.41	44.64	0.23	-9.59	Note 1
	6425-6525 UNII-6	11be EHT160 SU (Ant 6)	MCS0	Avg Power (dBm)	Fundamental LP	111 6505MHz	6.505	18.14	18.13	-0.01	-5.86	Note 1
	6425-6875 UNII-7	11be EHT160 996+484T S95 (CDD)	MCS0	Avg Power (dBm)	Fundamental SP	143 6665MHz	6.665	23.14	23.11	-0.03	-6.86	Note 1
	6875-7125 UNII-8	11be EHT160 SU (Ant 5)	MCS0	Avg Power (dBm)	Fundamental VLP	207 6985MHz	6.985	13.27	13.21	-0.06	-0.73	Note 1
	6875-7125 UNII-8	11a	54Mbps	Radiated Bandedge (Avg. dBm)	Vertical Bandedge	233 7115MHz	7.125068	-29.65	-29.85	-0.20	-2.65	Note 1

Note 1: Deviation from reference to variant within the value allowed by equation (4) in KDB 484596. Additional tests not required.

Note 2: Deviation from reference to variant exceeds the value allowed by equation (4) in KDB 484596. Additional tests performed on second channel.

3.4. SPOT CHECK VERIFICATION RESULTS SUMMARY FOR A3721

STATE A

Equipment Class / Technology	Frequency (GHz)	Mode	Data Rate	Test Item		Channel	Measured Frequency (GHz)	Sub Model: A3447	Sub Model: A3721	Delta (dB)	Margin	Remarks
								FCC ID : BCG-E9188A IC : 579C-E9188A	FCC ID : BCG-E9204A IC : 579C-E9204A			
6CD / 6VL UNII-5 / 6 / 7 / 8	5925 - 6425 UNII-5	11be EHT160 SU (Ant 5)	MCS0	Avg Power (dBm)	Fundamental VLP	47 6185MHz	6.185	12.95	12.92	-0.03	-1.05	Note 1
	5925 - 6425 UNII-5	11be EHT80 SU (CDD)	MCS11	Radiated Bandedge (Avg. dBm)	Vertical Bandedge	7 5985MHz	5.920868	-30.10	-27.48	2.62	-3.10	Note 1
	5925 - 6425 UNII-5	11be EHT20 26T RU4 (CDD)	MCS0	RSE (Avg. dBuV/m)	1 - 18GHz	45 6175MHz	17.958522	44.40	44.56	0.16	-9.60	Note 1
	6425-6525 UNII-6	11be EHT160 SU (Ant 5)	MCS0	Avg Power (dBm)	Fundamental LP	111 6505MHz	6.505	18.13	18.12	-0.01	-5.87	Note 1
	6425-6875 UNII-7	11be EHT40 SU (CDD)	MCS0	Avg Power (dBm)	Fundamental SP	147 6685MHz	6.685	23.14	22.81	-0.33	-6.86	Note 1
	6875-7125 UNII-8	11be EHT40 (CDD)	MCS11	Radiated Bandedge (Avg. dBm)	Vertical Bandedge	227 7085MHz	7.128334	-29.52	-30.48	-0.96	-2.52	Note 1

Note 1: Deviation from reference to variant within the value allowed by equation (4) in KDB 484596. Additional tests not required.

Note 2: Deviation from reference to variant exceeds the value allowed by equation (4) in KDB 484596. Additional tests performed on second channel.

STATE B

A3714 SPOT CHECK RESULTS												
Equipment Class / Technology	Frequency (GHz)	Mode	Data Rate	Test Item		Channel	Measured Frequency (GHz)	Sub Model: A3447	Sub Model: A3721	Delta (dB)	Margin	Remarks
								FCC ID : BCG-E9188A IC : 579C-E9188A	FCC ID : BCG-E9204A IC : 579C-E9204A			
6CD / 6VL UNII-5 / 6 / 7 / 8	5925 - 6425 UNII-5	11be EHT80 SU (CDD)	MCS0	RSE (Avg. dBuV/m)	1 - 18GHz	87 6385MHz	17.731181	44.41	43.41	-1.00	-9.59	Note 1
	6425-6525 UNII-6	11be EHT160 SU (Ant 6)	MCS0	Avg Power (dBm)	Fundamental LP	111 6505MHz	6.505	18.14	18.12	-0.02	-5.86	Note 1
	6425-6875 UNII-7	11be EHT160 996+484T S95 (CDD)	MCS0	Avg Power (dBm)	Fundamental SP	143 6665MHz	6.665	23.14	23.11	-0.03	-6.86	Note 1
	6875-7125 UNII-8	11be EHT160 SU (Ant 5)	MCS0	Avg Power (dBm)	Fundamental VLP	207 6985MHz	6.985	13.27	13.26	-0.01	-0.73	Note 1
	6875-7125 UNII-8	11a	54Mbps	Radiated Bandedge (Avg. dBm)	Vertical Bandedge	233 7115MHz	7.125068	-29.65	-29.18	0.47	-2.65	Note 1

Note 1: Deviation from reference to variant within the value allowed by equation (4) in KDB 484596. Additional tests not required.

Note 2: Deviation from reference to variant exceeds the value allowed by equation (4) in KDB 484596. Additional tests performed on second channel.

4. SETUP PHOTOS

Please refer to 16064952-EP1V1 for setup photos

END OF TEST REPORT