

TEST REPORT

Report Number: 16064952– E2V2

Applicant : APPLE INC.
1 APPLE PARK WAY
CUPERTINO, CA 95014, U.S.A.

Model : A3447 (Parent)
A3719, A3720, A3721 (Variants)

Brand : APPLE

FCC ID : BCG-E9188A (Parent)
BCG-E9198A, BCG-E9203A, BCG-E9204A (Variants)

IC : 579C-E9188A (Parent)
579C-E9198A, 579C-E9203A, 579C-E9204A (Variants)

EUT Description : SMARTPHONE

Test Standard(s) : FCC 47 CFR PART 15 SUBPART C
ISED RSS-247 ISSUE 4
ISED RSS-GEN ISSUE 5 + A1 + A2

Date Of Issue:

2026-07-11

Prepared by:

UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538 U.S.A.
TEL: (510) 319-4000
FAX: (510) 661-0888



REPORT REVISION HISTORY

Rev.	Issue Date	Revisions	Revised By
V1	2026-07-09	Initial Issue	--
V2	2026-07-11	Addressed TCB Questions: Sections 3, 9.1.3, 9.1.6, 9.1.10, 12.1, 12.3, 12.4	Chris Xiong

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	6
2. TEST RESULTS SUMMARY	7
3. TEST METHODOLOGY	7
4. FACILITIES AND ACCREDITATION	7
5. DECISION RULES AND MEASUREMENT UNCERTAINTY	8
5.1. METROLOGICAL TRACEABILITY	8
5.2. DECISION RULES	8
5.3. MEASUREMENT UNCERTAINTY	8
5.4. SAMPLE CALCULATION	8
6. EQUIPMENT UNDER TEST	9
6.1. EUT DESCRIPTION	9
6.2. MAXIMUM OUTPUT POWER	9
6.3. DESCRIPTION OF AVAILABLE ANTENNAS AND CABLE LOSS	9
6.4. SOFTWARE AND FIRMWARE	9
6.5. WORST-CASE CONFIGURATION AND MODE	10
6.6. DESCRIPTION OF TEST SETUP	11
7. TEST AND MEASUREMENT EQUIPMENT	15
8. ANTENNA PORT TEST RESULTS	17
8.1. ON TIME AND DUTY CYCLE	17
8.2. 99% BANDWIDTH	18
8.3. 6dB BANDWIDTH	20
8.3.1. HIGH POWER	20
8.4. OUTPUT POWER AND POWER SPECTRAL DENSITY	21
8.4.1. SISO	22
8.4.2. MIMO TXBF	23
8.5. AVERAGE POWER	24
8.5.1. SISO	25
8.5.2. MIMO TXBF	26
8.6. CONDUCTED SPURIOUS EMISSIONS	27
8.6.1. LELR8 – HIGH POWER – SISO	28
8.6.2. LELR8 – HIGH POWER – MIMO TXBF	30
8.6.3. LE1M – HIGH POWER – SISO	32
8.6.4. LE1M – HIGH POWER – MIMO TXBF	34
8.6.5. LE2M – HIGH POWER – SISO	36
8.6.6. LE2M – HIGH POWER – MIMO TXBF	38
8.6.7. HDT2 – HIGH POWER – SISO	40
8.6.8. HDT2 – HIGH POWER – MIMO TXBF	42

8.6.9.	LELR8 – LOW POWER – SISO	44
8.6.10.	LELR8 – LOW POWER – MIMO TXBF	46
8.6.11.	LE1M – LOW POWER – SISO	48
8.6.12.	LE1M – LOW POWER – MIMO TXBF	50
8.6.13.	LE2M – LOW POWER – SISO	52
8.6.14.	LE2M – LOW POWER – MIMO TXBF	54
8.6.15.	HDT2 – LOW POWER – SISO	56
8.6.16.	HDT2 – LOW POWER – MIMO TXBF	58
9.	RADIATED TEST RESULTS	60
9.1.	TRANSMITTER ABOVE 1 GHz	62
STATE A		62
9.1.1.	LOW BAND EDGE – HIGH POWER – SISO	62
9.1.2.	LOW BAND EDGE – HIGH POWER – MIMO TXBF	63
9.1.3.	LOW BAND EDGE – LOW POWER – SISO	64
9.1.4.	LOW BAND EDGE – LOW POWER – MIMO TXBF	65
9.1.5.	LOW BAND EDGE – WORST-CASE	66
9.1.6.	HIGH BAND EDGE – HIGH POWER – SISO	68
9.1.7.	HIGH BAND EDGE – HIGH POWER – MIMO TXBF	69
9.1.8.	HIGH BAND EDGE – LOW POWER – SISO	70
9.1.9.	HIGH BAND EDGE – LOW POWER – MIMO TXBF	71
9.1.10.	HIGH BAND EDGE – WORST-CASE	72
9.1.11.	SPURIOUS EMISSIONS – HIGH POWER – MIMO TXBF	74
9.1.12.	SPURIOUS EMISSIONS – WORST-CASE	76
STATE B		78
9.1.13.	LOW BAND EDGE – HIGH POWER – SISO	78
9.1.14.	LOW BAND EDGE – HIGH POWER – MIMO TXBF	79
9.1.15.	LOW BAND EDGE – LOW POWER – SISO	80
9.1.16.	LOW BAND EDGE – LOW POWER – MIMO TXBF	81
9.1.17.	LOW BAND EDGE – WORST-CASE	82
9.1.18.	HIGH BAND EDGE – HIGH POWER – SISO	84
9.1.19.	HIGH BAND EDGE – HIGH POWER – MIMO TXBF	85
9.1.20.	HIGH BAND EDGE – LOW POWER – SISO	86
9.1.21.	HIGH BAND EDGE – LOW POWER – MIMO TXBF	87
9.1.22.	HIGH BAND EDGE – WORST-CASE	88
9.1.23.	SPURIOUS EMISSIONS – HIGH POWER – MIMO TXBF	90
9.1.24.	SPURIOUS EMISSIONS – WORST-CASE	92
9.2.	30 MHz - 1 GHz – WORST-CASE	94
9.3.	18 GHz - 26 GHz – WORST-CASE	96
10.	AC POWER LINE CONDUCTED EMISSIONS	98
10.1.	AC POWER LINE WITH AC/DC ADAPTER	99
10.2.	AC POWER LINE WITH LAPTOP	101
11.	SETUP PHOTOS	103
12.	APPENDIX A – SPOT CHECK EVALUATION	103
12.1.	MODEL DIFFERENCES	103
12.2.	SPOT CHECK VERIFICATION RESULTS SUMMARY FOR A3719	104

12.3.	<i>SPOT CHECK VERIFICATION RESULTS SUMMARY FOR A3720</i>	104
12.4.	<i>SPOT CHECK VERIFICATION RESULTS SUMMARY FOR A3721</i>	104

1. ATTESTATION OF TEST RESULTS

Applicant Name and Address	APPLE INC. 1 APPLE PARK WAY CUPERTINO, CA 95014, U.S.A.
Model	A3447 (Parent) A3719, A3720, A3721 (Variants)
Brand	APPLE
FCC ID	BCG-E9188A (Parent) BCG-E9198A, BCG-E9203A, BCG-E9204A (Variants)
IC	579C-E9188A (Parent) 579C-E9198A, 579C-E9203A, 579C-E9204A (Variants)
EUT Description	SMARTPHONE
Serial Number	C07HPF000800000ZYA, C07HTH000DS0001B59 (Conducted) K2DLVM4C2D, J0C02TN797 (Radiated)
Sample Receipt Date	2026-02-17
Date Tested	2026-02-19 TO 2026-06-19
Applicable Standards	FCC 47 CFR Part 15 Subpart C ISED RSS-247 Issue 4 ISED RSS-GEN Issue 5 + A1 + A2
Test Results	COMPLIES
UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report. The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to ensure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise. This document may not be altered or revised in any way unless done so by UL Verification Services Inc., and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document.	
Approved & Released By:	Prepared & Reviewed By:
	
Frank Ibrahim Staff Engineer UL Verification Services Inc.	Chris Xiong Lab Supervisor UL Verification Services Inc.

2. TEST RESULTS SUMMARY

This report contains data provided by the customer, which can impact the validity of the results. UL Verification Services Inc. is only responsible for correctly integrating customer-provided data with measurements performed by UL Verification Services Inc.

Below is a list of the data provided by the customer:

1. Antenna gain and type (see Section 6.3)
2. Cable loss (see Section 6.3)

Requirement Description	Requirement Clause Number (FCC)	Requirement Clause Number (ISED)	Result
Duty Cycle	See Comment		Reporting purposes only
99% OBW	-	RSS-GEN 6.7	Complies
6dB BW	15.247 (a) (2)	RSS-247 6.3.1 (a)	Complies
Output Power	15.247 (b) (3)	RSS-247 6.3.2	Complies
PSD	15.247 (e)	RSS-247 6.3.1 (b)	Complies
Conducted Spurious Emissions	15.247 (d)	RSS-247 6.6	Complies
Radiated Emissions	15.209, 15.205	RSS-GEN 8.9, 8.10	Complies
AC Mains Conducted Emissions	15.207	RSS-Gen 8.8	Complies

3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with;

- FCC 47 CFR Part 2
- FCC 47 CFR Part 15C
- KDB 558074 D01 15.247 Meas Guidance
- KDB 414788 D01 Radiated Test Site
- KDB 662911 D01 Multiple Transmitter Output
- KDB 484596 D01 Referencing Test Data
- RSS-GEN Issue 5 + A1 + A2
- RSS-247 Issue 4
- ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024

4. FACILITIES AND ACCREDITATION

UL Verification Services Inc. is accredited by A2LA, certification #0751.05, for all testing performed within the scope of this report. Testing was performed at the locations noted below.

	Address	ISED CABID	ISED Company Number	FCC Registration
☒	Building 1: 47173 Benicia Street, Fremont, CA 94538, USA	US0104	2324A	550739
☒	Building 2: 47266 Benicia Street, Fremont, CA 94538, USA			
☒	Building 3: 843 Auburn Court, Fremont, CA 94538, USA			
☒	Building 4: 47658 Kato Rd, Fremont, CA 94538, USA			
☒	Building 5: 47670 Kato Rd, Fremont, CA 94538, USA			

5. DECISION RULES AND MEASUREMENT UNCERTAINTY

5.1. METROLOGICAL TRACEABILITY

All test and measuring equipment utilized to perform the tests documented in this report are calibrated regularly, with a maximum time between calibrations of one year or the manufacturer's recommendation, whichever is less, and, where applicable, is traceable to recognized national standards.

5.2. DECISION RULES

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4:2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

5.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	U _{LAB}
Conducted Antenna Port Emission Measurement	1.94 dB
Time Domain Measurements Using SA	3.39 %
RF Power Measurement Direct Method Using Power Meter	0.450 dB (Average) 1.30 dB (Peak)
Radio Frequency (Spectrum Analyzer)	141.16 Hz
Occupied Bandwidth	1.22 %
Carrier Frequency Separation	19.70 Hz
Number of Hopping Frequencies	0.000 dB
Worst Case Conducted Disturbance, 9kHz to 0.15 MHz	3.78 dB
Worst Case Conducted Disturbance, 0.15 to 30 MHz	3.40 dB
Worst Case Radiated Disturbance, 9kHz to 30 MHz	2.87 dB
Worst Case Radiated Disturbance, 30 to 1000 MHz	6.01 dB
Worst Case Radiated Disturbance, 1000 to 18000 MHz	4.73 dB
Worst Case Radiated Disturbance, 18000 to 26000 MHz	4.51 dB

Uncertainty figures are valid to a confidence level of 95%.

5.4. SAMPLE CALCULATION

RADIATED EMISSIONS

Where relevant, the following sample calculation is provided:

Field Strength (dBuV/m) = Measured Voltage (dBuV) + Antenna Factor (dB/m) + Cable Loss (dB) – Preamp Gain (dB)

36.5 dBuV + 18.7 dB/m + 0.6 dB – 26.9 dB = 28.9 dBuV/m

MAINS CONDUCTED EMISSIONS

Where relevant, the following sample calculation is provided:

Final Voltage (dBuV) = Measured Voltage (dBuV) + Cable Loss (dB) + Limiter Factor (dB) + LISN Insertion Loss.

36.5 dBuV + 0 dB + 10.1 dB + 0 dB = 46.6 dBuV

6. EQUIPMENT UNDER TEST

6.1. EUT DESCRIPTION

The Apple iPhone is a smartphone (foldable) with cellular GSM, GPRS, EGPRS, WCDMA, LTE, 5G NR1, 5G NR2, IEEE 802.11a/b/g/n/ac/ax/be, Bluetooth (BT), Ultra-Wideband (UWB), Global Positioning System (GPS), Near-Field Communication (NFC), Narrow-Band (NB) UNII, 802.15.4, 802.15.4ab-Narrow Band (NB), Wireless Power Transfer (WPT) and Mobile Satellite Service (MSS) technologies. The rechargeable battery is not user accessible. It can be operated in two unique operating states – phone “fully closed” (State A) and phone “fully open” (State B).

6.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum conducted output power as follows:

Frequency Range (MHz)	Mode	Antenna	Configuration	Output Power (dBm)	Output Power (mW)
2402 - 2480	LELR8	ANT 4	High Power	12.95	19.72
		ANT 3	High Power	12.94	19.68
		BF, ANT 4 + ANT 3	High Power	12.87	19.36
2402 - 2480	LE1M	ANT 4	High Power	21.13	129.72
		ANT 3	High Power	20.61	115.08
		BF, ANT 4 + ANT 3	High Power	22.65	184.08
2404 - 2478	LE2M	ANT 4	High Power	21.21	132.13
		ANT 3	High Power	20.68	116.95
		BF, ANT 4 + ANT 3	High Power	23.48	222.84
2404 - 2476	HDT2	ANT 4	High Power	16.86	48.53
		ANT 3	High Power	16.30	42.66
		BF, ANT 4 + ANT 3	High Power	19.55	90.16

6.3. DESCRIPTION OF AVAILABLE ANTENNAS AND CABLE LOSS

The antenna(s) gain and type (IFA), as provided by the manufacturer are as follows:

Frequency Range (GHz)	Antenna Type	Configuration	Antenna Peak Gain				Cable Loss	
			ANT 4 (dBi)	ANT 3 (dBi)	Uncorrelated Chains (dBi)	Correlated Chains (dBi)	ANT 4 (dB)	ANT 3 (dB)
2.4	IFA	STATE A	-4.40	-4.30	-5.20	-2.20	3.15	3.03
		STATE B	-3.40	-3.60	-3.70	-0.70	3.15	3.03

The cables were used for RF antenna port tests that had been offset to the test equipment during testing.

6.4. SOFTWARE AND FIRMWARE

The EUT firmware and software installed during testing were 24A343.

6.5. WORST-CASE CONFIGURATION AND MODE

The EUT was evaluated in two configurations: State A (fully closed) and State B (fully open), and in three orthogonal orientations: X (Flatbed), Y (Landscape), and Z (Portrait). The table below identifies the worst-case orientation for each configuration, and full testing was conducted in those orientations.

Band	State	ANT 4	ANT 3	ANT 4 + 3
2.4 GHz	A	X (Flatbed)	Z (Portrait)	X (Flatbed)
	B	X (Flatbed)	Y (Landscape)	X (Flatbed)

Radiated band-edge, harmonic, and spurious emissions from 1 GHz to 18 GHz were measured with the EUT transmitting at the highest power on the low, middle, and high channels.

Radiated emissions below 30 MHz, below 1 GHz, from 18 GHz to 26 GHz, as well as power line conducted emissions, were measured with the EUT transmitting on the channel with the highest output power to represent the worst-case condition.

Below 1GHz tests were performed with EUT connected to AC power adapter as the worst case; and for above 1 GHz, the worst-case configuration reported was tested with EUT only. For AC line conducted emission, test was investigated with AC power adapter and with laptop. There were no emissions found below 30 MHz within 20 dB of the limit.

All simultaneous transmission combinations have been investigated, and no signal emissions were observed.

The plots presented in this report are representative of the test methods and parameter settings used during the evaluation.

Based on the above investigations, the worst-case power levels and PSD modes selected for final testing are summarized in the table below.

Band	Mode	Frequency Range (MHz)	Worst Case	
			Power	PSD
2.4 GHz	LE Adv	2402 - 2480		
	LE1M		X	
	LELR8			X
	LELR2			
	BTCSM1_LE1M			
	LE2M	2404 - 2478	X	X
	BTCSM1_LE2M			
	BTCSM1_LE2M 2.0			
	HDT2	2404 - 2476	X	X
	HDT3			
	HDT4			
	HDT6			
	HDT8			

The output power for ANT 4 and ANT 3 (SISO and TxBF) between State A and State B are identical. Both State A and B were evaluated, and no significant differences were observed between the two states for SISO and TxBF. Therefore only a single representative set of conducted test results is presented. Where applicable, the higher antenna gain of the two States has been used to assess compliance. However, due to variations in antenna gain between State A and State B, full radiated testing was performed for both states.



For AC line conducted emissions, radiated emissions below 1 GHz, and radiated emissions above 18 GHz, only the worst-case test results are included in this report.



6.6. Scription of Test Setup


SUPPORT TEST EQUIPMENT						
Description		Manufacturer	Model	Serial Number		FCC ID/ DoC
Macbook Pro		Apple	A2992	DVJJ642FYM		BCGA2992
96W USB-C Power Adapter		Apple	A2166	C4H238408ABPMOWAV		DoC
Conducted Switch Box		UL	CSB	235779		N/A
20W USB-C Power Adapter		Apple	A2305	C4H951600C3PF4F4U		DoC
10dB Fixed Attenuator		Pasternack Enterprises	PE7087-10	236360		N/A
I/O CABLES (RF CONDUCTED TEST)						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	SMA	1	SMA	Shielded	0.2	To the spectrum Analyzer
2	Antenna	1	SMA	Shielded	0.2	EUT to Switchbox
3	USB	1	USB-C	Shielded	1.0	N/A
4	DC	1	DC	Shielded	2.0	N/A
5	Antenna	1	SMA	Shielded	0.1	EUT to Power Meter
I/O CABLES (RF RADIATED AND AC LINE CONDUCTED TEST)						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC	1	DC	Shielded	2	N/A
2	USB	1	USB-C	Shielded	1	N/A

TEST SETUP

The EUT setup is shown below. Test software exercised the radio card.

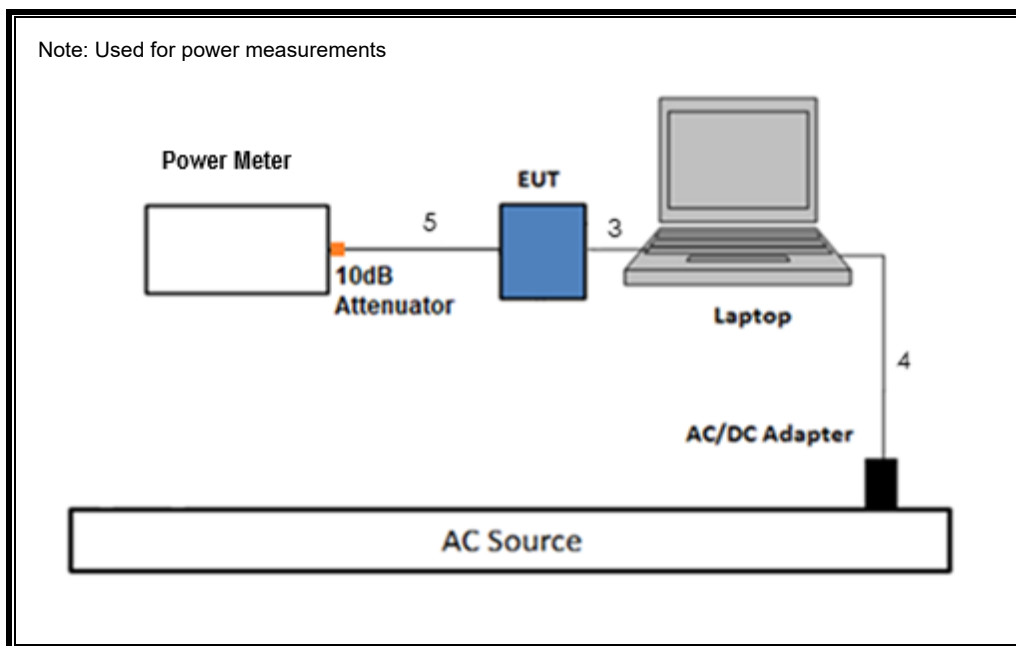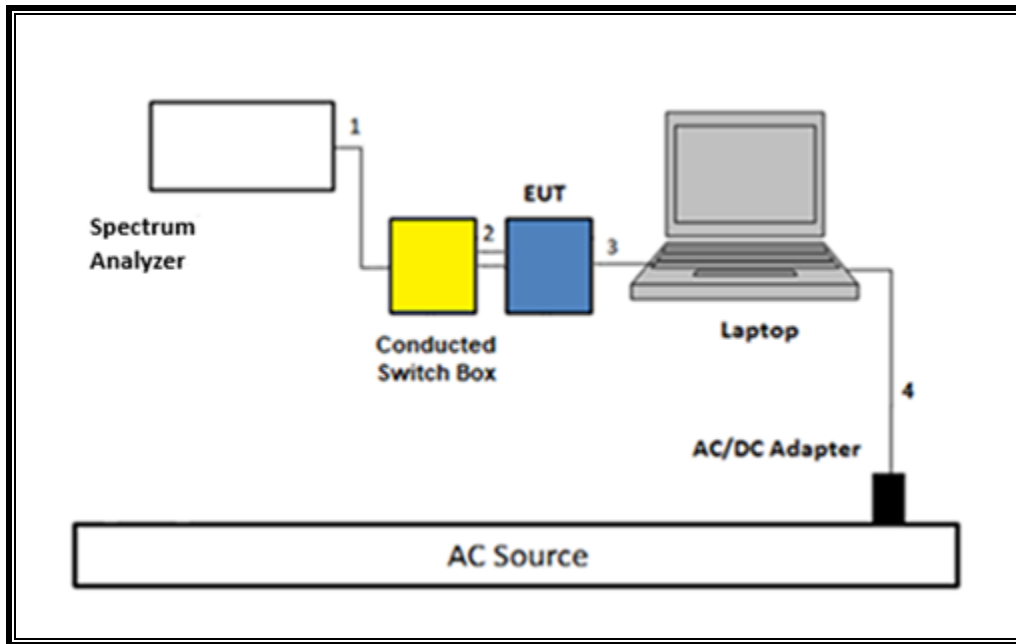SETUP DIAGRAM FOR CONDUCTED TESTS

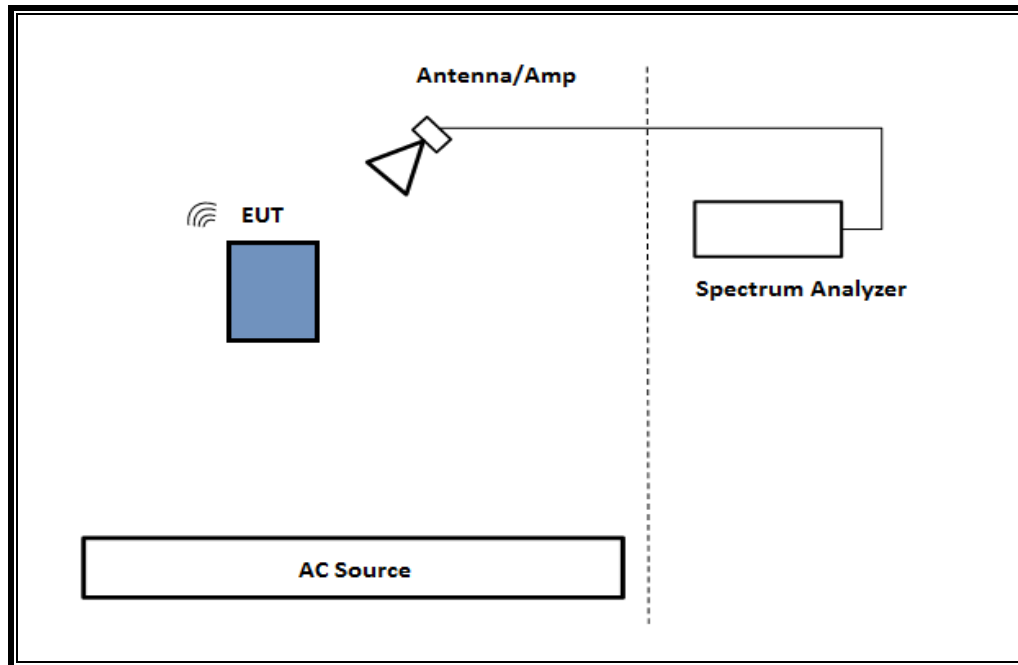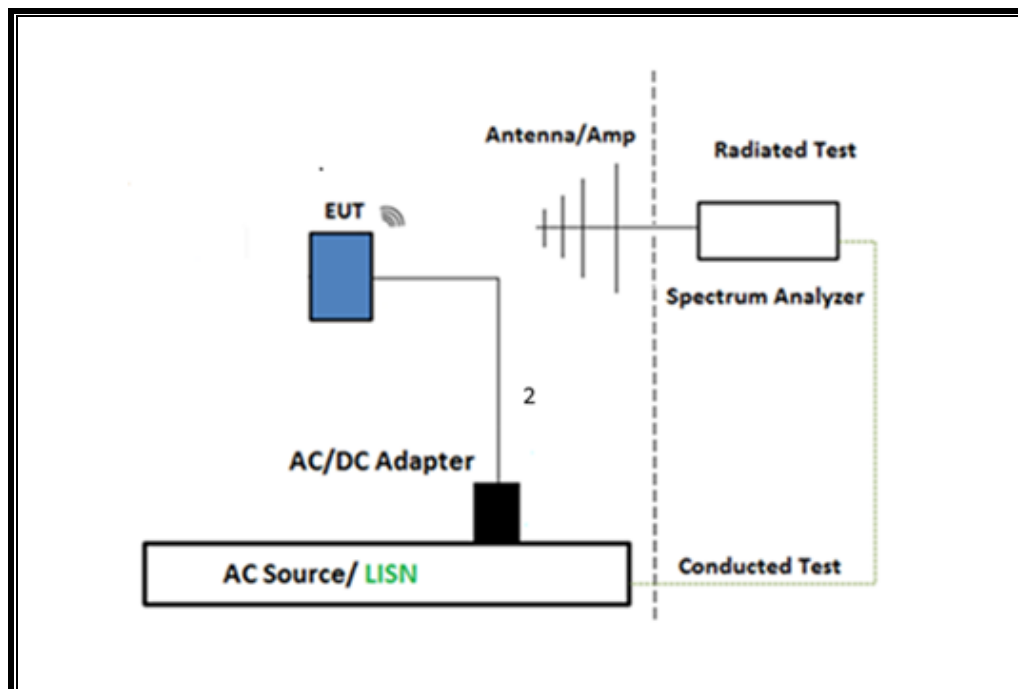SETUP DIAGRAM FOR RADIATED TESTS 1 GHz - 26 GHz**SETUP DIAGRAM FOR RADIATED TESTS 30 MHz - 1 GHz and AC LINE CONDUCTED TEST**

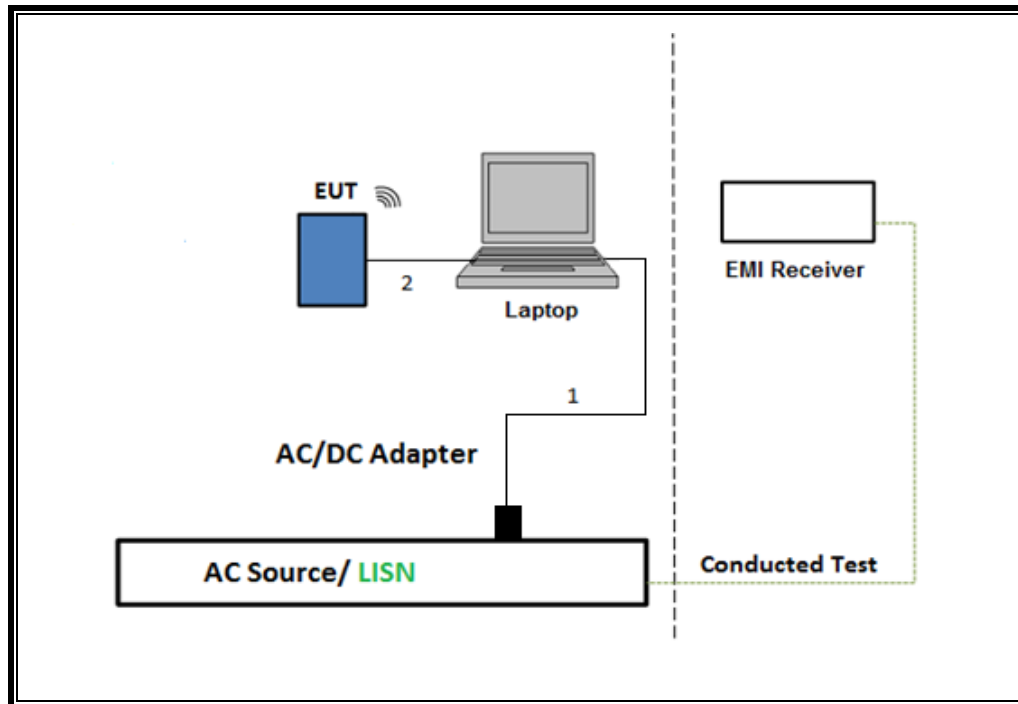TEST SETUP- AC LINE CONDUCTED: LAPTOP CONFIGURATION

7. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	ID Number	Cal Due
EMI TEST RECEIVER	Rohde & Schwarz	ESW44	275999	2027-03-31
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	200784	2027-03-31
Filter Box	UL-FR1	R103, 2 Amp, 12 Port	279299	2027-05-31
EMI TEST RECEIVER	Rohde & Schwarz	ESW44	191428	2027-02-28
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	226674	2027-03-31
Filter Box	UL-FR1	RATS 1.0, 2 Amp, 6 Port	250156	2026-10-30
EMI TEST RECEIVER	Rohde & Schwarz	ESW44	169935	2027-03-31
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	200897	2027-09-30
Filter Box	UL-FR1	R102, 1 Amp, 12 Port	230878	2027-05-31
EMI TEST RECEIVER	Rohde & Schwarz	ESW44	169933	2027-02-28
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	80402	2027-07-31
Filter Box	UL-FR1	Frankenstein, 1 Amp, 12 Port	231874	2027-01-31
EMI TEST RECEIVER	Rohde & Schwarz	ESW44	170063	2027-02-28
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	223084	2027-06-30
Filter Box	UL-FR1	Frankenstein, 1 Amp, 12 Port	231875	2026-12-30
EMI TEST RECEIVER	Rohde & Schwarz	ESW44	230548	2027-02-28
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	200896	2027-03-31
* Filter Box	UL-FR1	Frankenstein, 1 Amp, 12 Port	216812	2026-06-30
EMI TEST RECEIVER	Rohde & Schwarz	ESW44	201499	2027-03-30
Antenna, Horn 18 to 26.5GHz	A.R.A.	MWH-1826/B	172354	2027-05-31
RF Amplifier Assembly, 18-26.5GHz, 60dB Gain	AMPLICAL	AMP18G26.5-60	221832	2027-04-30
EMI TEST RECEIVER	Rohde & Schwarz	ESW44	201502	2027-02-28
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	79834	2027-09-30
Filter Box	UL-FR1	R103, 2 Amp, 12 Port	278885	2027-06-30
EMI TEST RECEIVER	Rohde & Schwarz	ESW44	223460	2027-02-28
Antenna, Broadband Hybrid, 30MHz to 3GHz	Sunol Sciences Corp.	JB3	204045	2027-05-31
Amplifier 9 KHz - 1 GHz	SONOMA INSTRUMENT	310N	224489	2026-09-30
Antenna, Passive Loop 30Hz - 1MHz	ELECTRO-METRICS	EM-6871	170014	2027-09-30
Antenna, Passive Loop 100KHz - 30MHz	ELECTRO-METRICS	EM-6872	170016	2027-09-30
EMI TEST RECEIVER	Rohde & Schwarz	ESW44	223459	2027-02-28
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	206805	2027-08-31
Filter Box	UL-FR1	RATS 2.0, 1 Amp, 17 Port	226780	2027-05-31
EMI TEST RECEIVER	Rohde & Schwarz	ESW44	226079	2027-02-28
Antenna, Horn 18 to 26.5GHz	A.R.A.	MWH-1826/B	81139	2027-10-31
RF Amplifier Assembly, 18-26.5GHz, 60dB Gain	AMPLICAL	AMP18G26.5-60	220194	2027-06-30
PXA Signal Analyzer 2Hz to 44GHz	Keysight Technologies Inc	N9030B	231912	2027-01-31
Conducted Switch Box	UL	CSB	187984	2027-01-31
Spectrum Analyzer, PXA, 3Hz-44GHz	Keysight Technologies Inc	N9030A	85214	2027-01-31
Conducted Switch Box	UL	CSB	245783	2027-01-31
Spectrum Analyzer, PXA, 3Hz-44GHz	Keysight Technologies Inc	N9030A	85313	2027-01-31
Conducted Switch Box	UL	CSB	235779	2027-01-31
P-Series Power Meter	Keysight Technologies Inc	N1912A-CFG003	259286	2027-01-31
Power Sensor, P - series, 50MHz to 18GHz, Wideband	Keysight Technologies Inc	N1921A	90389	2027-01-31
P-Series Power Meter	Keysight Technologies Inc	N1911A	90731	2027-01-31
Power Sensor, P - series, 50MHz to 18GHz, Wideband	Keysight Technologies Inc	N1921A	257705	2027-01-31
** 10dB Fixed Attenuator	Pasternack Enterprises	PE7087-10	236360	Verified
** 10dB Fixed Attenuator	Pasternack Enterprises	PE7024-10	238180	Verified

* - Testing was completed prior to the calibration due date of the equipment.

** - The equipment does not require calibration. Performance is verified prior to use in accordance with laboratory procedures.

AC LINE CONDUCTED				
Description	Manufacturer	Model	ID Num	Cal Due
EMI TEST RECEIVER	Rohde & Schwarz	ESC17	82297	2027-02-28
LISN	Fischer Custom Communications	FCC-LISN-50/250-25-2-01-480V	175765	2027-01-31
Transient Limiter	TE	TBFL1	207996	2026-12-30

UL AUTOMATION SOFTWARE			
Radiated Software	UL	UL EMC	Ver 9.5, Aug 15, 2025 Ver 9.5, Dec 15, 2025
Conducted Software	UL	Station Tool	V2026.6.0
AC Line Conducted Software	UL	UL EMC	Ver 9.5, Aug 25, 2025

8. ANTENNA PORT TEST RESULTS

8.1. ON TIME AND DUTY CYCLE

LIMITS

None; for reporting purposes only.


TEST PROCEDURE

ANSI C63.10, Subclause 11.6.

ON TIME AND DUTY CYCLE RESULTS

Mode	ON Time T (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T Minimum VBW (kHz)
LELR8	17.050	17.500	0.974	97.43	0.11	0.059
LE1M	2.117	2.497	0.848	84.78	0.72	0.472
LE2M	1.063	1.875	0.567	56.69	2.46	0.941
HDT2	2.128	2.208	0.964	96.38	0.16	0.470

Note: The duty cycle is identical for both 1TX and 2TX configurations.

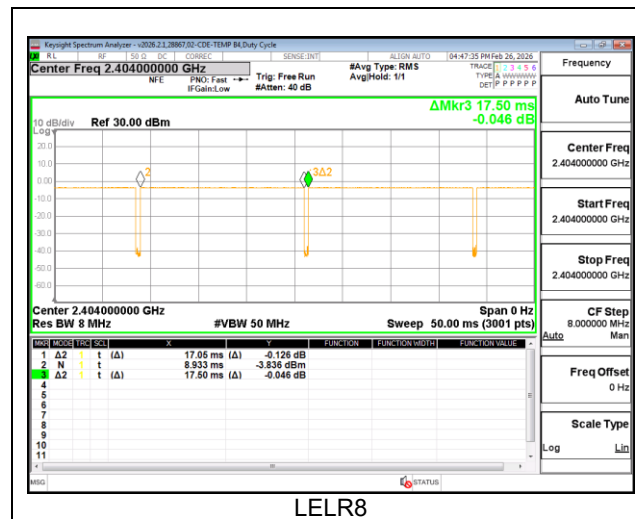

8.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.


TEST PROCEDURE

ANSI C63.10, Subclause - 6.9.3


RESULTS

Both SISO and MIMO TXBF modes were evaluated, and no significant differences were observed. Accordingly, only the SISO high-power results are presented.


Mode (SISO)	Frequency (MHz)	Channel	99% Bandwidth (MHz)	
			ANT 4	ANT 3
LELR8	2402	Low	1.0440	1.0447
	2440	Mid	1.0449	1.0452
	2480	High	1.0447	1.0445
LE1M	2402	Low	1.0155	1.0154
	2440	Mid	1.0147	1.0152
	2480	High	1.0145	1.0152
LE2M	2404	Low	2.0323	2.0321
	2440	Mid	2.0311	2.0327
	2478	High	2.0310	2.0317
HDT2	2404	Low	2.3504	2.3496
	2440	Mid	2.3516	2.3535
	2476	High	2.3526	2.3508

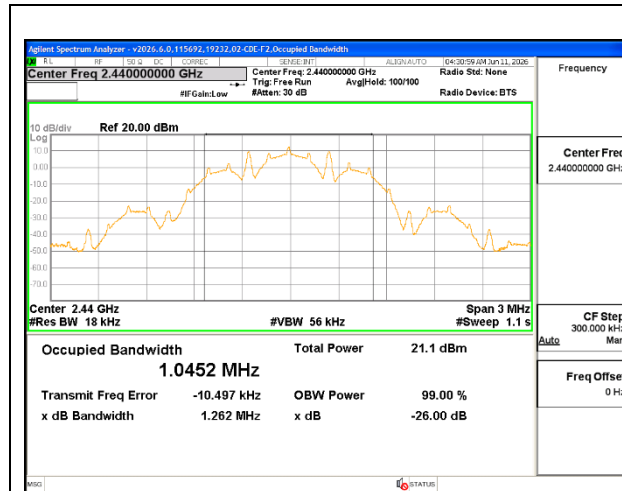WORST MAXIMUM PLOTS


Mid Channel (LELR8) – ANT 3

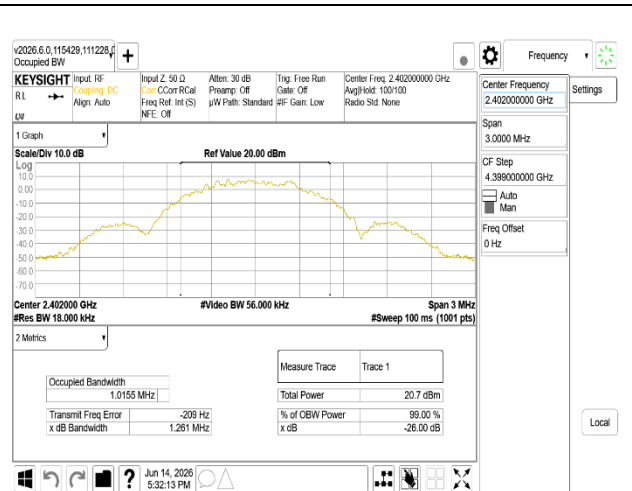

Low Channel (LE1M) – ANT 4

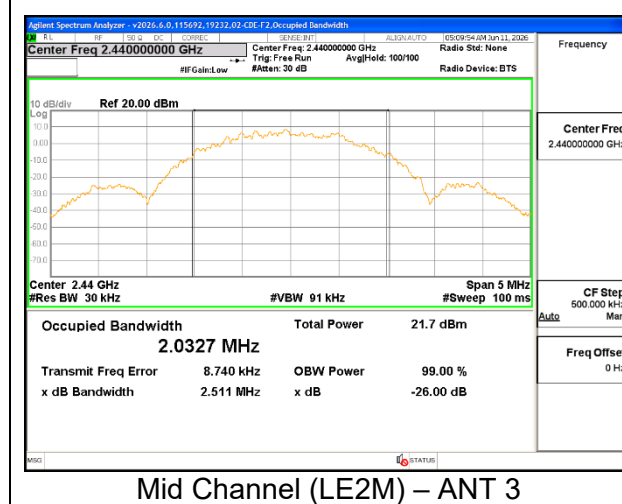

Mid Channel (LE2M) – ANT 3

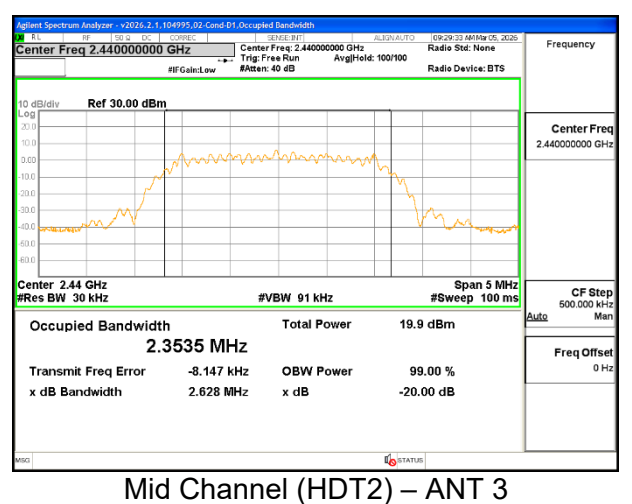

Mid Channel (HDT2) – ANT 3

8.3. 6dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)

RSS-247 6.3.1 (a)

The minimum 6 dB bandwidth shall be at least 500 kHz.

TEST PROCEDURE

ANSI C63.10 Subclause - 11.8.1 Option 1


RESULTS

The 6 dB bandwidth was measured in the narrowest bandwidth modes (LELR8 and BLE1M), which represent the worst-case condition, to demonstrate compliance with the minimum required bandwidth of 500 kHz across all modes.

8.3.1. HIGH POWER

Mode (SISO)	Frequency (MHz)	Channel	6dB Bandwidth (MHz)	
			ANT 4	ANT 3
LELR8	2402	Low	0.675	0.672
	2440	Mid	0.672	0.678
	2480	High	0.669	0.672
BLE1M	2402	Low	0.663	0.666
	2440	Mid	0.654	0.660
	2480	High	0.660	0.663

WORST MINIMUM PLOT

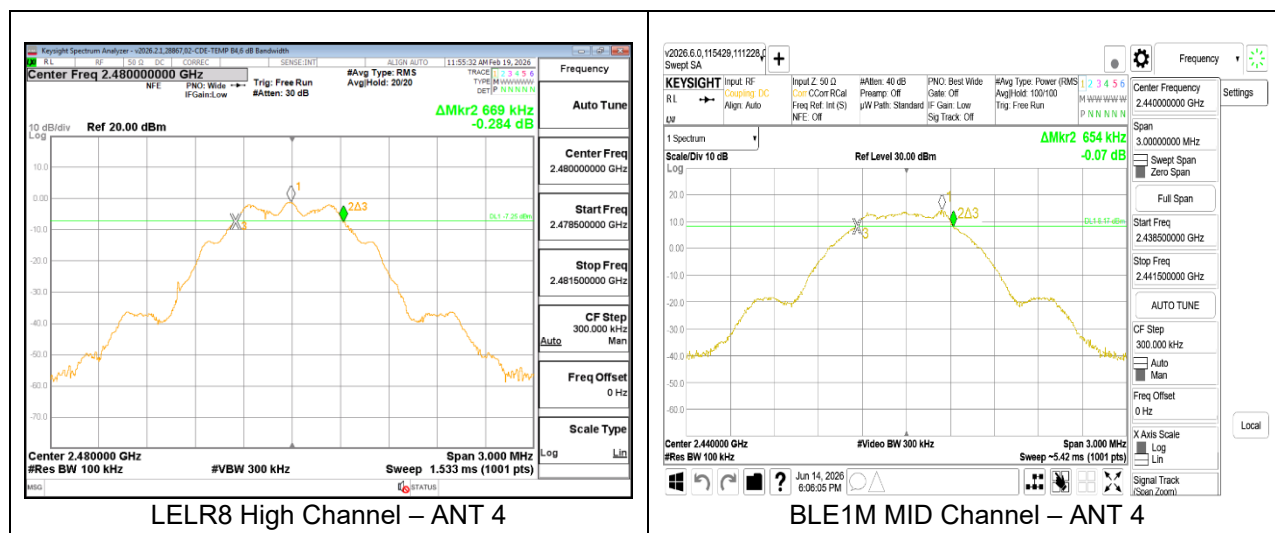

8.4. OUTPUT POWER AND POWER SPECTRAL DENSITY

LIMITS

FCC §15.247 (b) (3) & (e)

RSS-247 6.3.2 & 6.3.1 (b)

For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST PROCEDURE

Conducted Output Power: ANSI C63.10 Subclause - 11.9.1.2 Method PKPM1 (Peak-reading power meter)

Power Spectral Density: ANSI C63.10 Subclause - 11.10.2 Method PKPSD (Peak PSD)

DIRECTIONAL ANTENNA GAIN

For 1 TX:

There is only one transmitter output; therefore, the directional gain is equal to the antenna gain.

For 2 TX:

Tx chains are correlated for power and PSD due to the device supporting beamforming modes. The directional gains are as follows:

Frequency Range (GHz)	Antenna Type	Configuration	Antenna Peak Gain			
			ANT 4 (dBi)	ANT 3 (dBi)	Uncorrelated Chains (dBi)	Correlated Chains (dBi)
2.4	IFA	STATE A	-4.40	-4.30	-5.20	-2.20
		STATE B	-3.40	-3.60	-3.70	-0.70

RESULTS

Only the mid-channel plot is presented to illustrate the analyzer settings.


Note: The RBW setting used for PSD measurement is greater than or equal to 3 kHz.

8.4.1. SISO

2.4G (SISO)	
ANT 4 (dBi)	-3.40
ANT 3 (dBi)	-3.60

Mode (SISO)	Power Config.	Frequency (MHz)	Channel	Power Limit (dBm)		Output Power (dBm)		PSD Limit (dBm/3kHz)		PSD (dBm/kHz)	
				ANT 4	ANT 3	ANT 4	ANT 3	ANT 4	ANT 3	ANT 4	ANT 3
LELR8	High	2402	Low	30	30	12.89	12.94	8	8	6.976	7.225
		2440	Mid			12.95	12.91			6.988	7.056
		2480	High			12.88	12.91			6.834	7.065
	Low	2402	Low			8.78	8.55			2.687	2.421
		2440	Mid			8.89	8.56			2.739	2.389
		2480	High			8.77	8.54			2.698	2.432
LE1M	High	2402	Low			21.13	20.54			4.790	4.840
		2440	Mid			21.10	20.57			4.610	4.500
		2480	High			21.02	20.61			4.770	4.510
	Low	2402	Low			8.70	8.53			-7.930	-8.110
		2440	Mid			8.82	8.59			-7.720	-7.820
		2480	High			8.70	8.53			-7.910	-8.310
LE2M	High	2404	Low			21.17	20.63			2.167	1.687
		2440	Mid			21.21	20.68			2.132	1.720
		2478	High			21.12	20.53			2.089	1.593
	Low	2404	Low			8.79	8.54			-10.210	-10.551
		2440	Mid			8.94	8.81			-10.139	-10.709
		2478	High			8.65	8.69			-10.114	-10.542
HDT2	High	2404	Low			16.86	16.19			-5.000	-5.309
		2440	Mid			16.77	16.30			-4.948	-5.423
		2476	High			16.78	16.24			-4.912	-5.664
	Low	2404	Low			8.22	7.98			-12.801	-13.536
		2440	Mid			8.31	8.07			-12.619	-13.645
		2476	High			8.30	8.09			-12.901	-13.557

Worst-Case Plot:


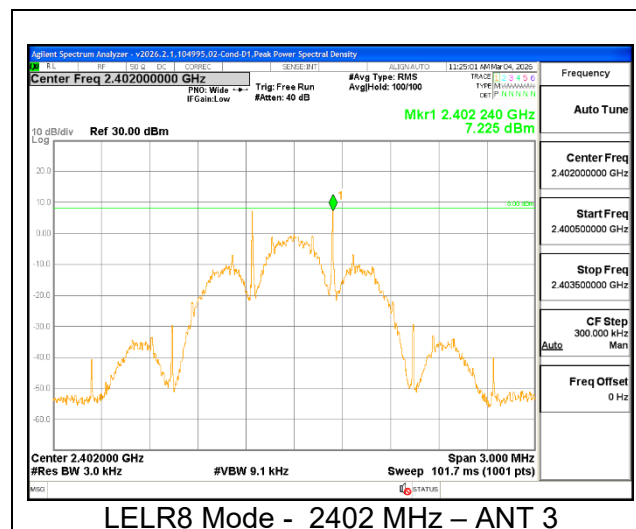


8.4.2. MIMO TXBF

2.4G (MIMO TXBF)	
Un-Correlated Gain (dBi)	-3.70
Correlated Gain (dBi)	-0.70

Mode (MIMO TXBF)	Power Config.	Frequency (MHz)	Channel	Power Limit (dBm)	Output Power (dBm)		Total MIMO Corrected Power (dBm)	PSD Limit (dBm/3kHz)	PSD (dBm/kHz)		Total MIMO Corrected PSD (dBm/kHz)
					ANT 4	ANT 3			ANT 4	ANT 3	
LELR8	High	2402	Low	30	9.81	9.85	12.84	8	3.818	4.030	6.936
		2440	Mid		9.86	9.85	12.87		3.784	3.901	6.853
		2480	High		9.81	9.77	12.80		3.922	3.868	6.905
	Low	2402	Low		8.91	8.54	11.74		2.642	2.472	5.568
		2440	Mid		8.85	8.59	11.73		2.601	2.418	5.521
		2480	High		8.72	8.59	11.67		2.577	2.327	5.464
LE1M	High	2402	Low		19.62	19.60	22.62		3.130	3.290	6.221
		2440	Mid		19.65	19.63	22.65		3.140	3.080	6.120
		2480	High		19.65	19.61	22.64		3.150	3.300	6.236
	Low	2402	Low		8.70	8.58	11.65		-7.990	-8.260	-5.113
		2440	Mid		8.77	8.55	11.67		-7.670	-7.730	-4.690
		2480	High		8.68	8.57	11.64		-7.890	-8.390	-5.123
LE2M	High	2404	Low		20.41	20.46	23.45		1.564	1.504	4.544
		2440	Mid		20.42	20.43	23.44		1.436	1.537	4.497
		2478	High		20.44	20.49	23.48		1.410	1.524	4.478
	Low	2404	Low		8.89	8.57	11.74		-10.275	-10.624	-7.436
		2440	Mid		8.82	8.59	11.72		-10.215	-10.445	-7.318
		2478	High		8.77	8.49	11.64		-10.293	-10.526	-7.398
HDT2	High	2404	Low		16.85	16.20	19.55		-4.840	-5.264	-2.037
		2440	Mid		16.71	16.25	19.50		-4.885	-5.129	-1.995
		2476	High		16.79	16.16	19.50		-5.101	-5.513	-2.292
	Low	2404	Low		8.28	8.09	11.20		-13.611	-14.037	-10.808
		2440	Mid		8.22	8.11	11.18		-13.469	-13.805	-10.623
		2476	High		8.32	8.10	11.22		-13.597	-14.054	-10.809

Worst-Case Plots:

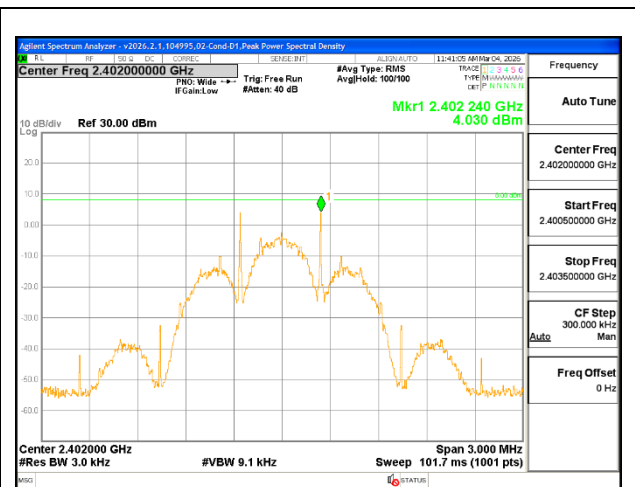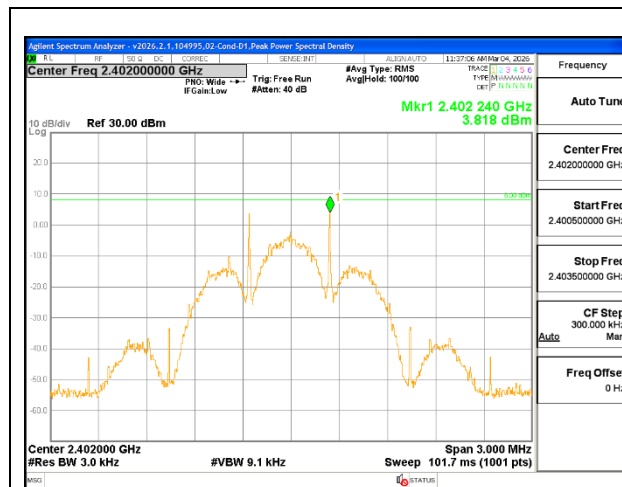

8.5. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

ANSI C63.10 Subclause - 11.9.2.3.2 Method AVGPM G (Measurement using an RF average-reading power meter)

RESULTS

8.5.1. SISO

Mode (SISO)	Power Config.	Frequency (MHz)	Channel	Average Power (Gated) (dBm)	
				ANT 4	ANT 3
LELR8	High	2402	Low	12.67	12.72
		2440	Mid	12.71	12.67
		2480	High	12.66	12.71
	Low	2402	Low	8.60	8.41
		2440	Mid	8.73	8.44
		2480	High	8.60	8.42
LE1M	High	2402	Low	20.97	20.41
		2440	Mid	20.95	20.46
		2480	High	20.93	20.37
	Low	2402	Low	8.60	8.39
		2440	Mid	8.72	8.46
		2480	High	8.60	8.44
LE2M	High	2404	Low	20.97	20.43
		2440	Mid	20.99	20.46
		2478	High	20.95	20.37
	Low	2404	Low	8.60	8.38
		2440	Mid	8.74	8.25
		2478	High	8.65	8.46
HDT2	High	2404	Low	13.93	13.41
		2440	Mid	13.93	13.47
		2476	High	13.98	13.45
	Low	2404	Low	5.68	5.43
		2440	Mid	5.72	5.44
		2476	High	5.71	5.43

8.5.2. MIMO TXBF

Mode (MIMO TXBF)	Power Config.	Frequency (MHz)	Channel	Average Power (Gated) (dBm)		Total MIMO Average Power (Gated) (dBm)
				ANT 4	ANT 3	
LELR8	High	2402	Low	9.61	9.69	12.66
		2440	Mid	9.67	9.70	12.70
		2480	High	9.66	9.65	12.67
	Low	2402	Low	8.70	8.40	11.56
		2440	Mid	8.70	8.45	11.59
		2480	High	8.60	8.46	11.54
LE1M	High	2402	Low	19.46	19.43	22.46
		2440	Mid	19.46	19.49	22.49
		2480	High	19.45	19.47	22.47
	Low	2402	Low	8.60	8.46	11.54
		2440	Mid	8.67	8.47	11.58
		2480	High	8.60	8.43	11.53
LE2M	High	2404	Low	20.22	20.23	23.24
		2440	Mid	20.17	20.19	23.19
		2478	High	20.19	20.25	23.23
	Low	2404	Low	8.67	8.45	11.57
		2440	Mid	8.70	8.43	11.58
		2478	High	8.60	8.31	11.47
HDT2	High	2404	Low	13.95	13.42	16.70
		2440	Mid	13.91	13.47	16.71
		2476	High	13.97	13.41	16.71
	Low	2404	Low	5.70	5.45	8.59
		2440	Mid	5.67	5.47	8.58
		2476	High	5.75	5.47	8.62

8.6. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

RSS-247 6.6

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).


TEST PROCEDURE


ANSI C63.10 Subclause - 11.12.2

RESULTS

8.6.1. LELR8 – HIGH POWER – SISO


ANT 4

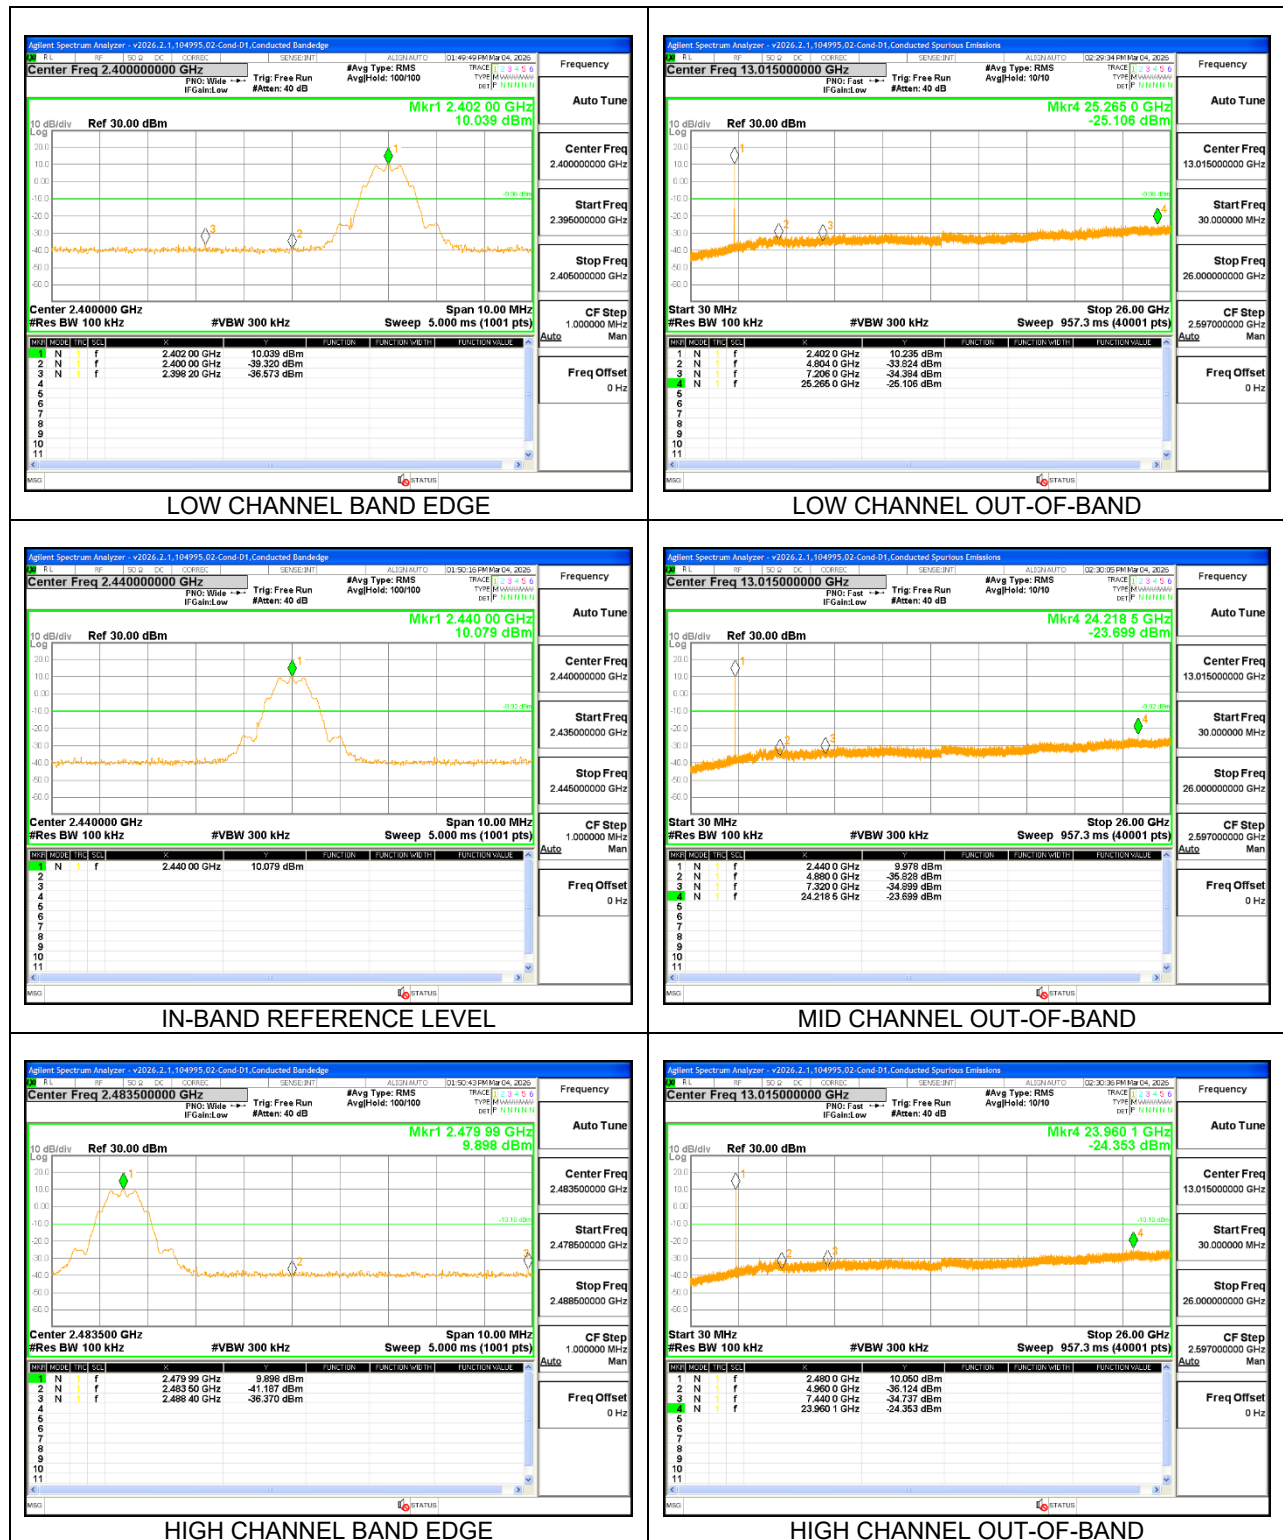


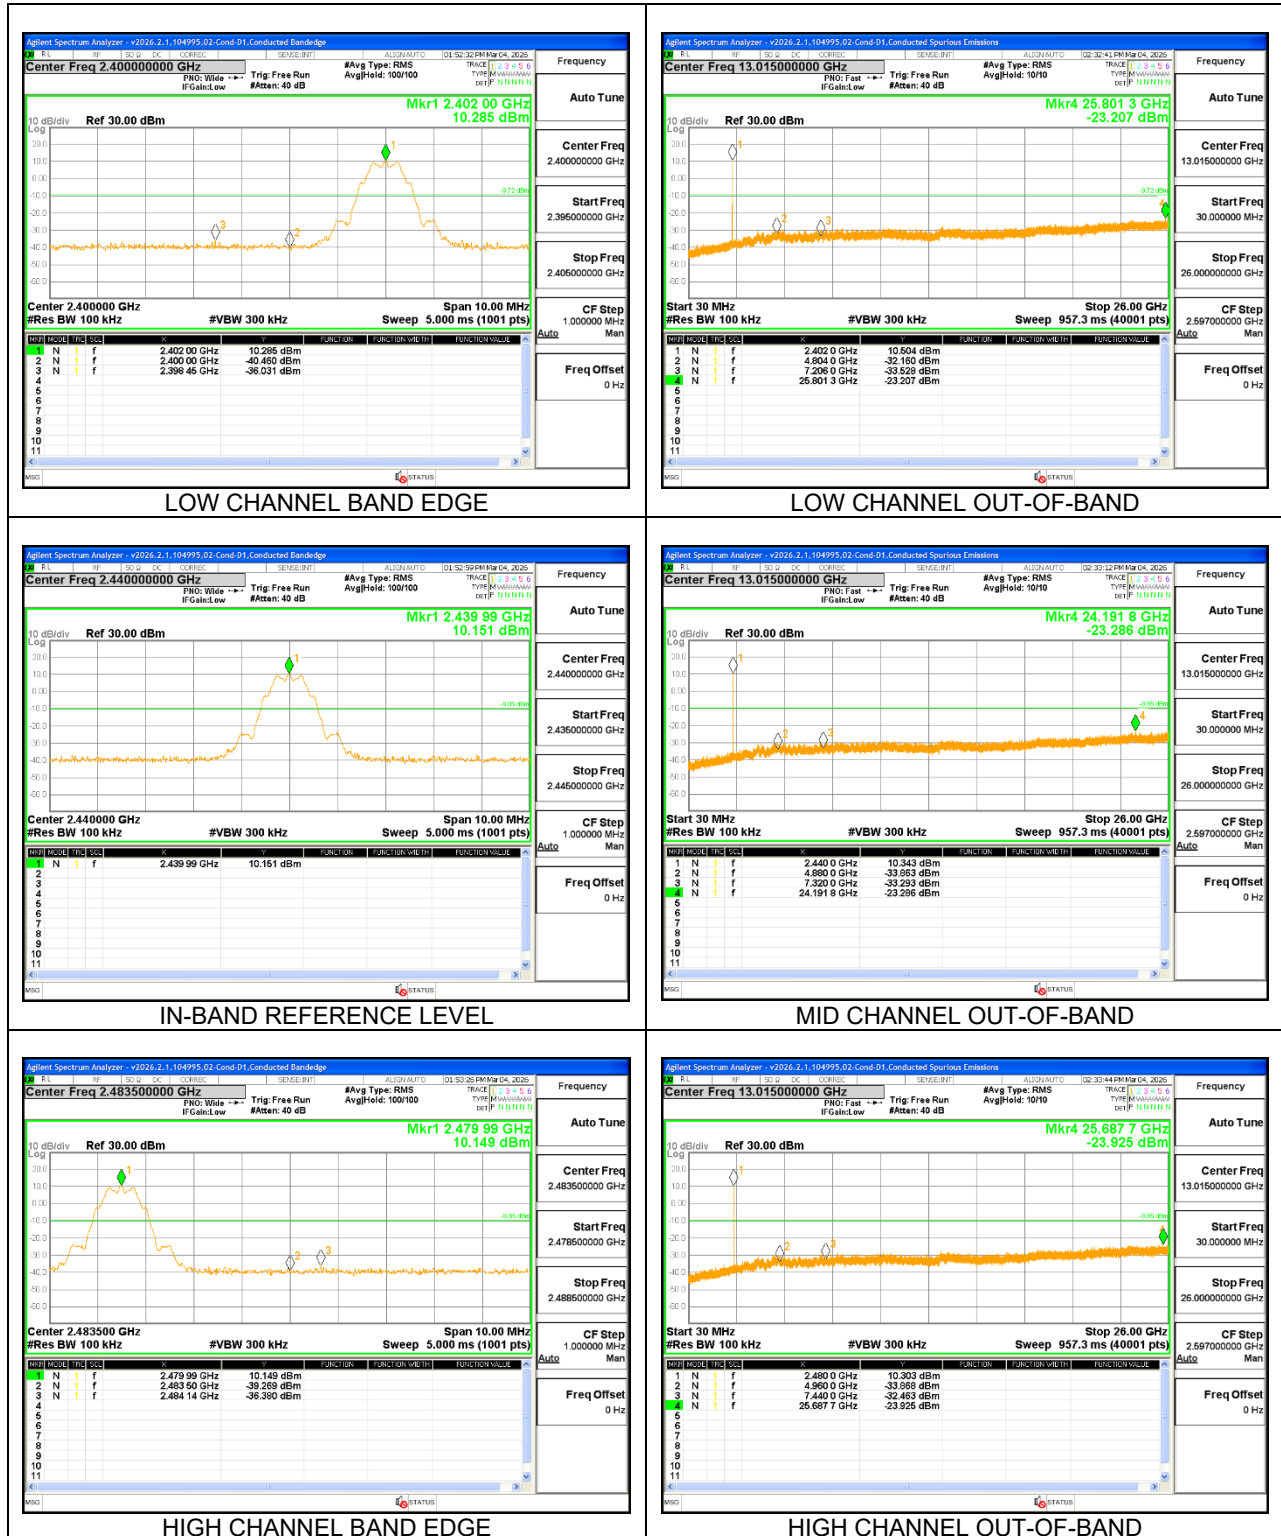ANT 3

8.6.2. LELR8 – HIGH POWER – MIMO TXBF

ANT 4

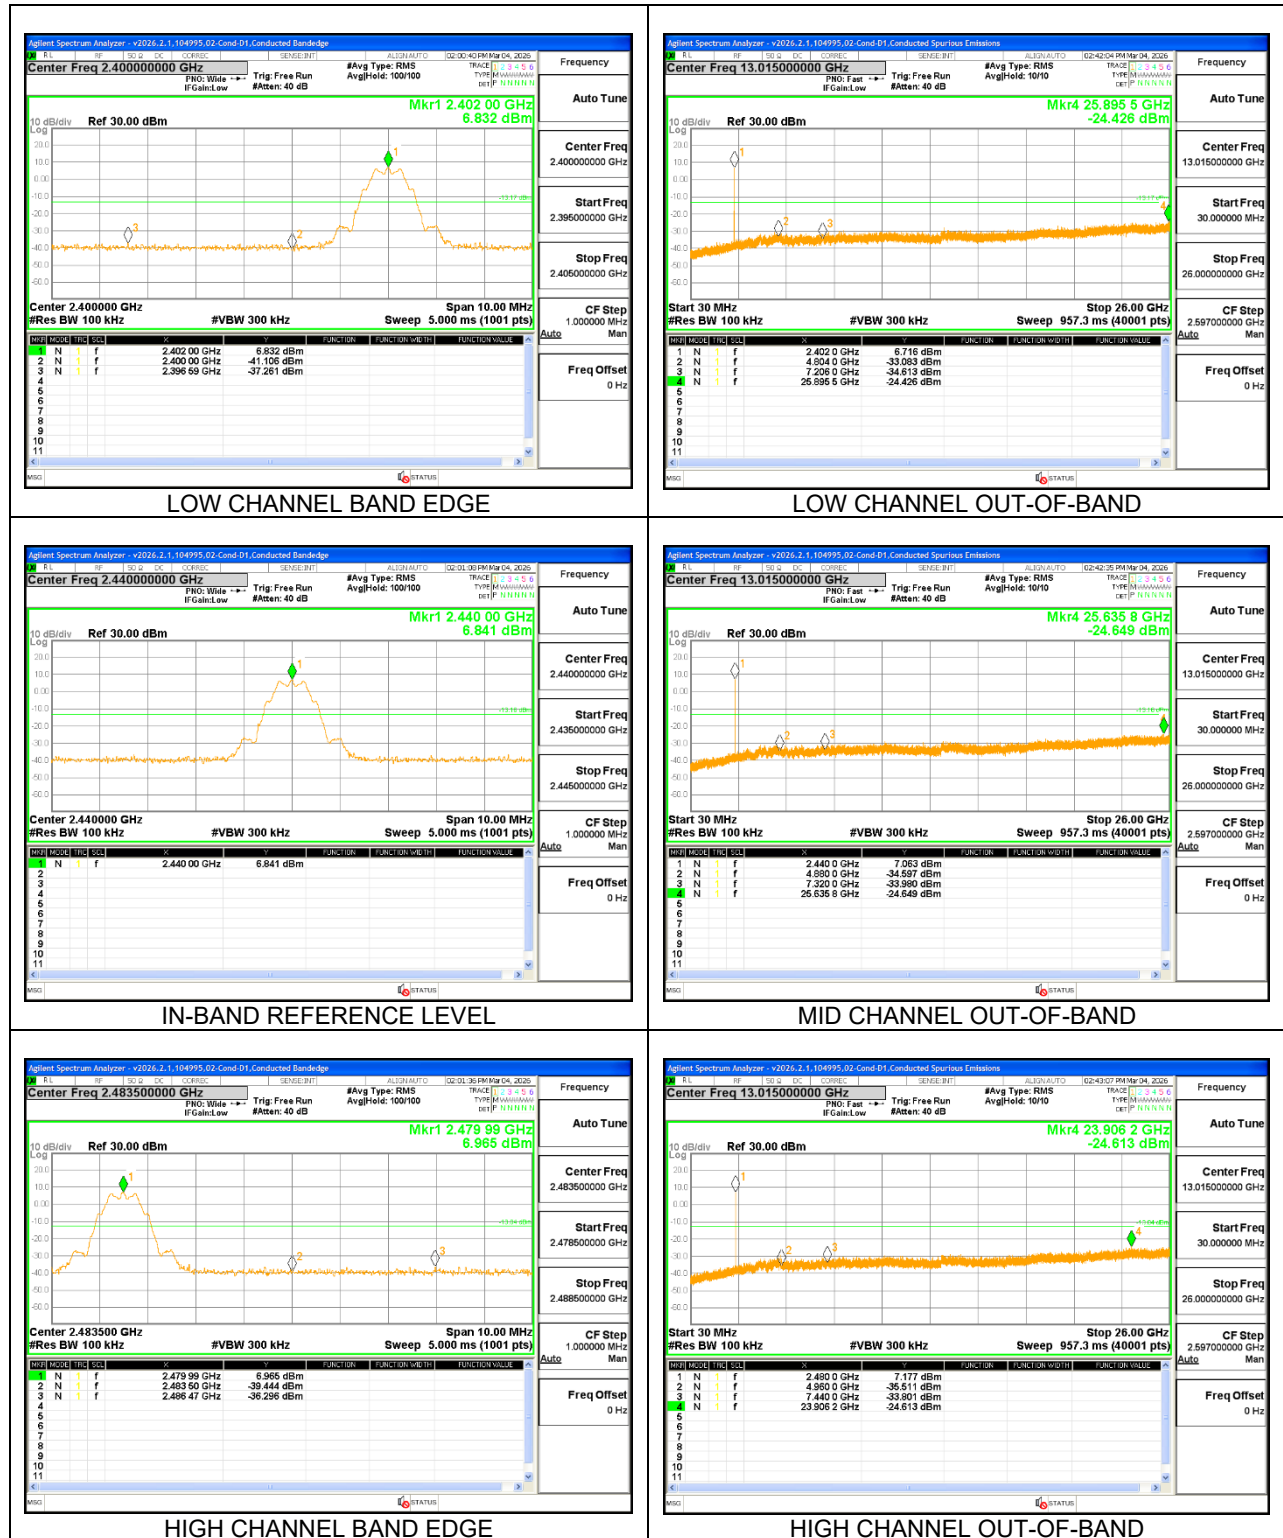

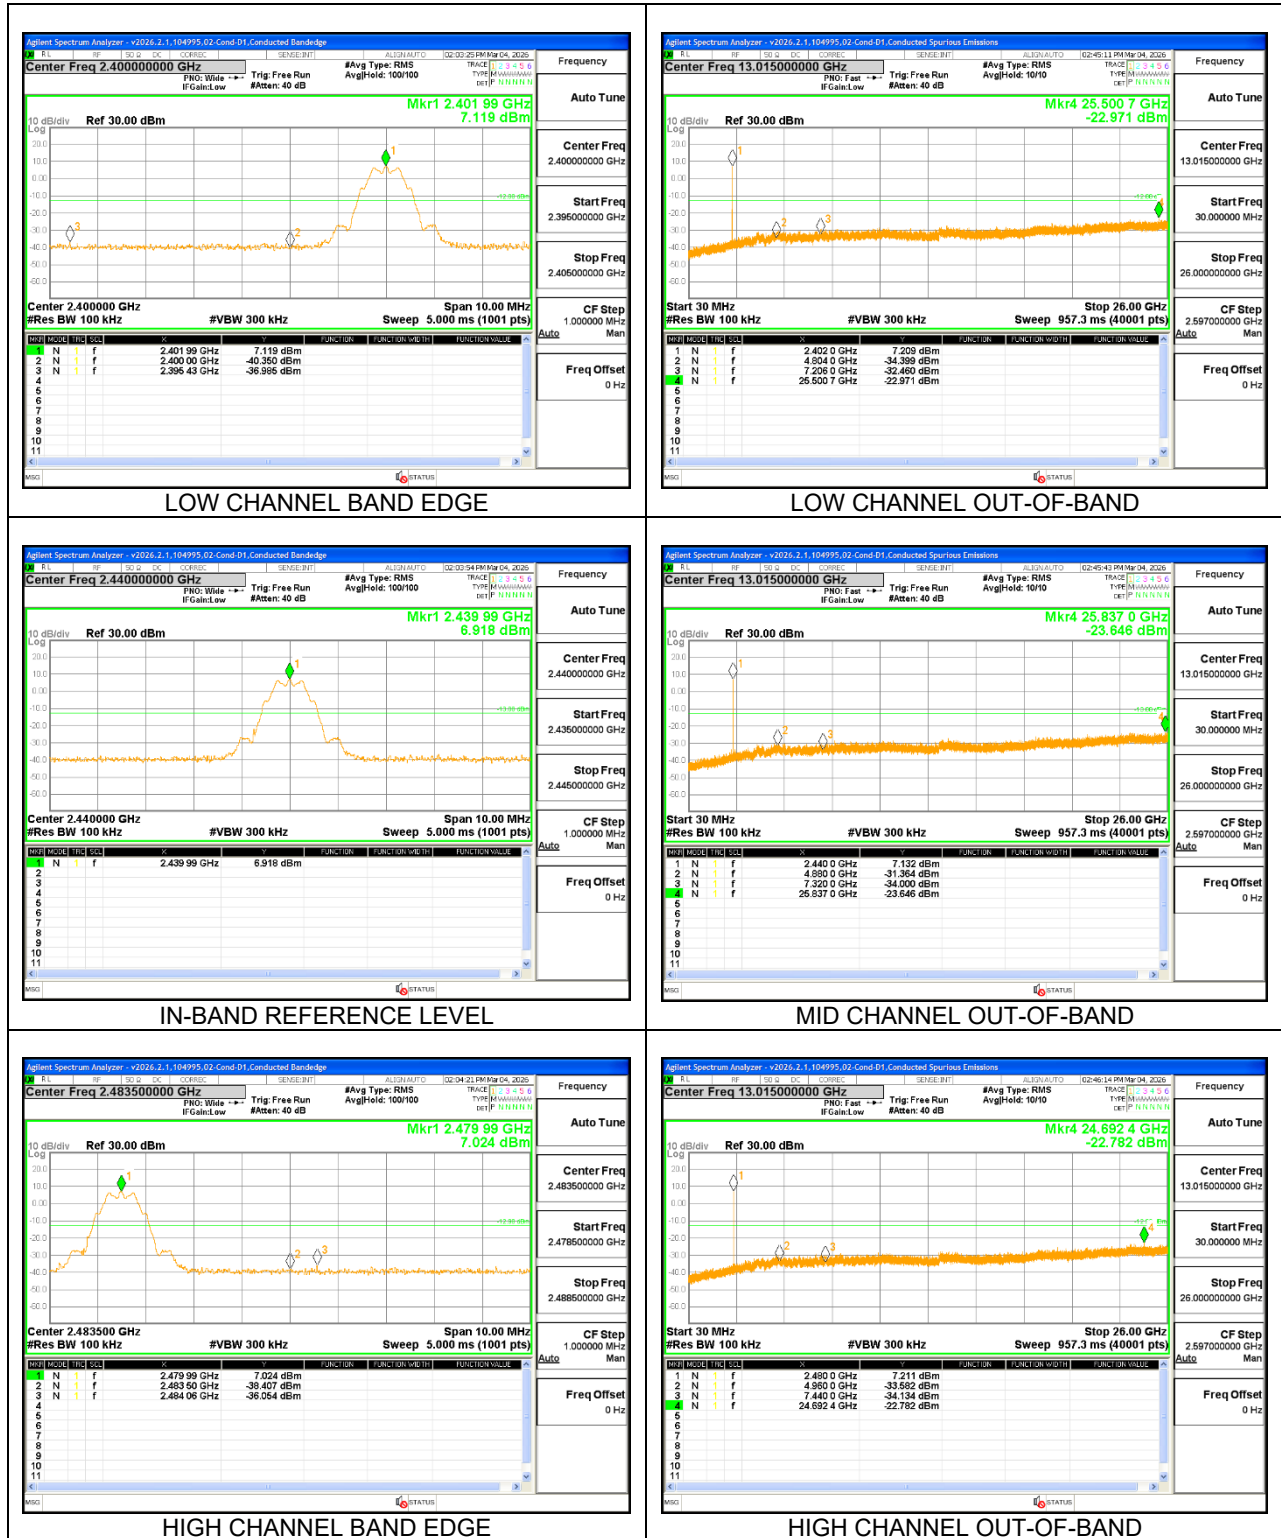ANT 3

8.6.3. LE1M – HIGH POWER – SISO

ANT 4



ANT 3

8.6.4. LE1M – HIGH POWER – MIMO TXBF


ANT 4




ANT 3

8.6.5. LE2M – HIGH POWER – SISO

ANT 4

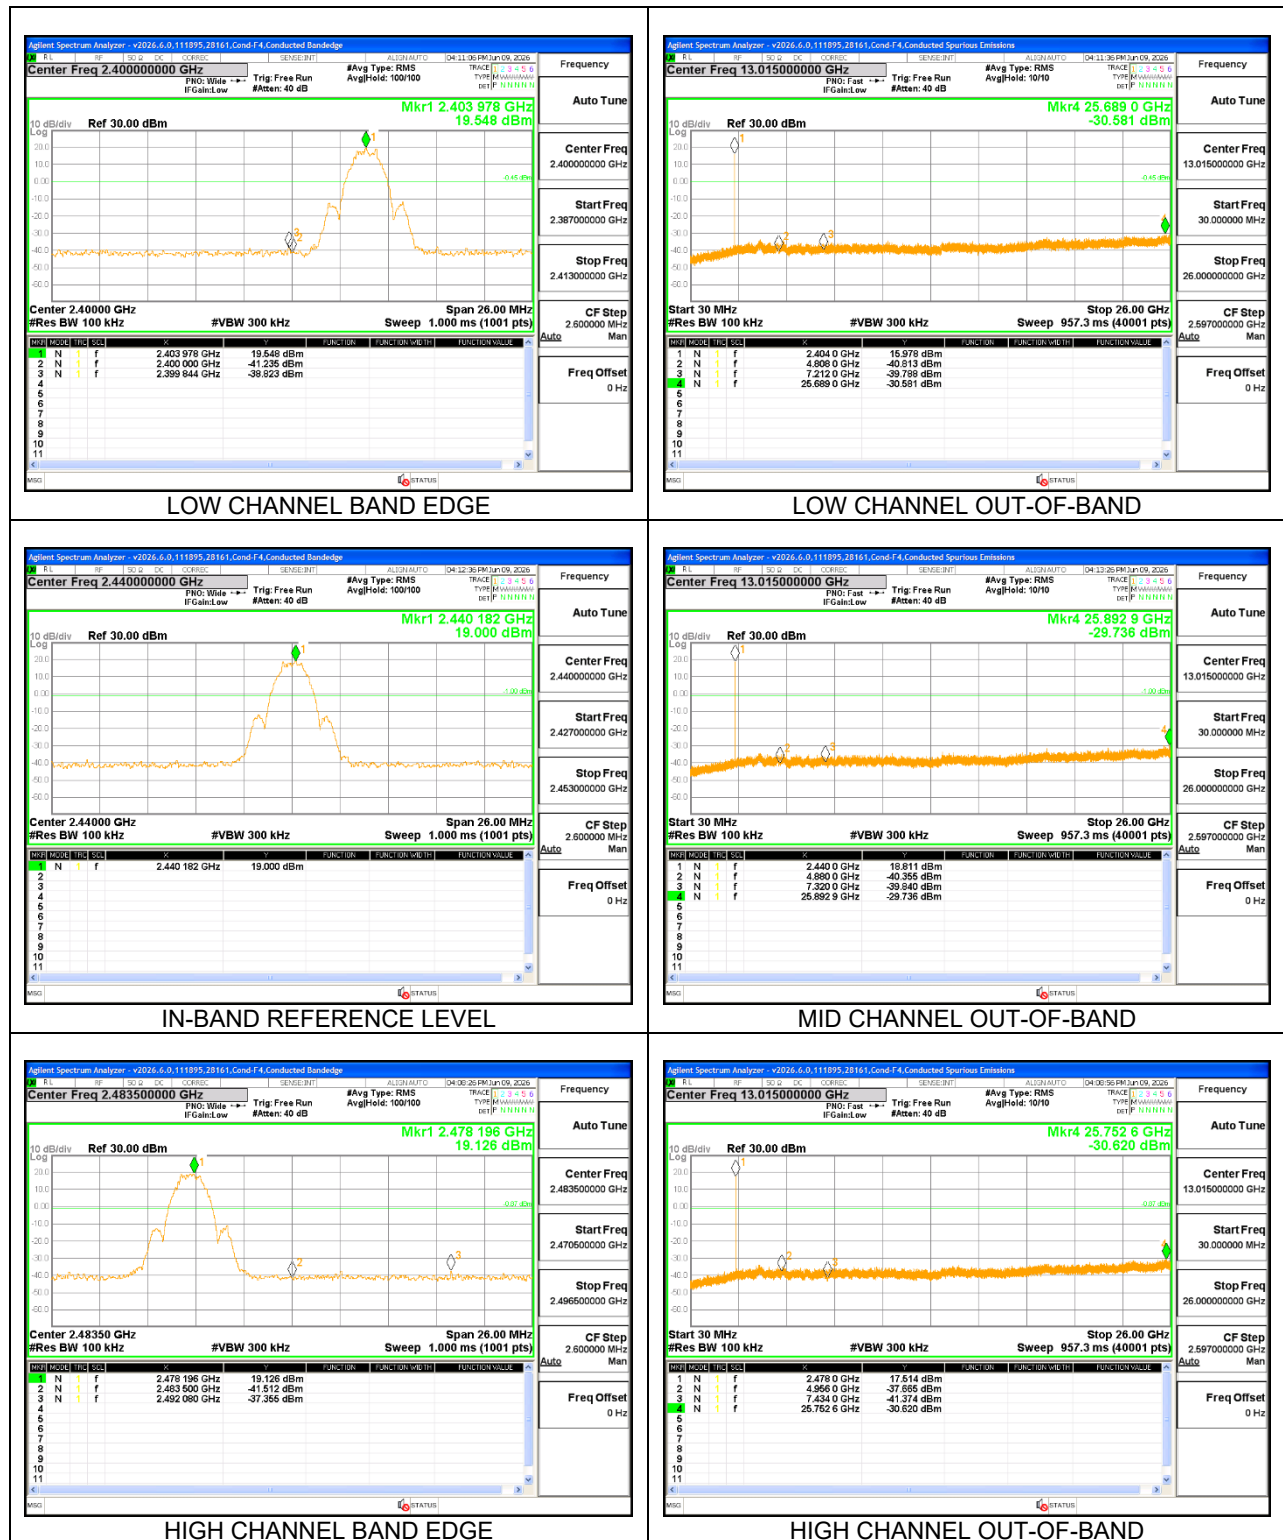

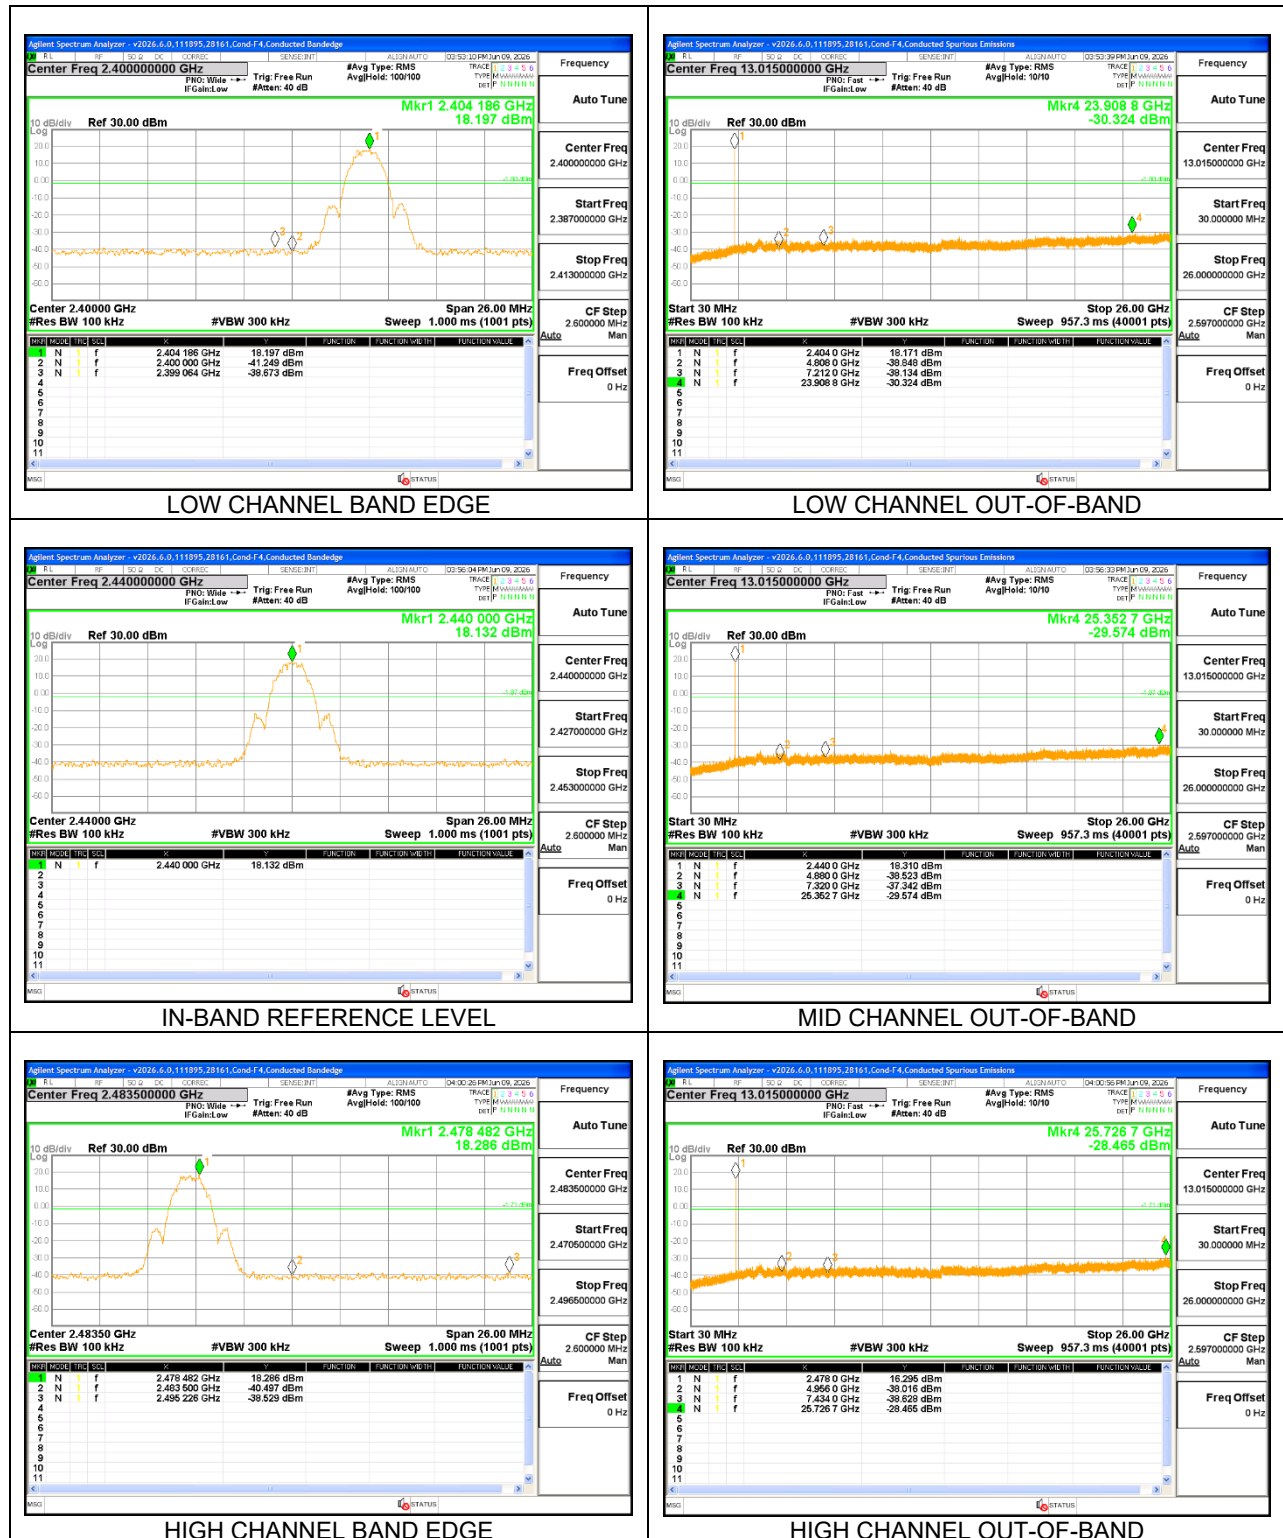ANT 3

8.6.6. LE2M – HIGH POWER – MIMO TXBF

ANT 4

