



FCC 47 CFR PART 15 SUBPART E

CERTIFICATION TEST REPORT

FOR

TABLET DEVICE

MODEL NUMBER: A1599

FCC ID: BCGA1599

REPORT NUMBER: 14U17895-E3, Revision C

ISSUE DATE: AUGUST 28, 2014

Prepared for
APPLE, INC.
1 INFINITE LOOP
CUPERTINO, CA 95014, U.S.A.

Prepared by
UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888



NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
--	8/12/14	Initial Issue	F. de Anda
A	8/12/14	Add DFS section	D. Garcia
B	8/28/14	Update report per TCB comments	D. Garcia
C	9/3/14	Update report per TCB comments	D. Garcia

TABLE OF CONTENTS

-	
1. ATTESTATION OF TEST RESULTS	8
2. TEST METHODOLOGY	9
3. FACILITIES AND ACCREDITATION	9
4. CALIBRATION AND UNCERTAINTY	9
4.1. MEASURING INSTRUMENT CALIBRATION	9
4.2. SAMPLE CALCULATION	9
4.3. MEASUREMENT UNCERTAINTY	10
5. EQUIPMENT UNDER TEST	11
5.1. DESCRIPTION OF EUT	11
5.2. MAXIMUM OUTPUT POWER	11
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	12
5.4. SOFTWARE AND FIRMWARE	12
5.5. WORST-CASE CONFIGURATION AND MODE	12
5.6. DESCRIPTION OF TEST SETUP	13
6. TEST AND MEASUREMENT EQUIPMENT	17
7. MEASUREMENT METHODS	17
8. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS	18
8.1. ON TIME AND DUTY CYCLE RESULTS	18
8.2. DUTY CYCLE PLOTS	19
9. ANTENNA PORT TEST RESULTS	21
9.1. 802.11a 1Tx MODE IN THE 5.2 GHz BAND	21
9.1.1. 26 dB BANDWIDTH	21
9.1.2. 99% BANDWIDTH	24
9.1.3. AVERAGE POWER	27
9.1.4. OUTPUT POWER AND PSD	28
9.2. 802.11n HT20 1Tx MODE IN THE 5.2 GHz BAND	32
9.2.1. 26 dB BANDWIDTH	32
9.2.2. 99% BANDWIDTH	35
9.2.3. AVERAGE POWER	38
9.2.4. OUTPUT POWER AND PSD	39
9.3. 802.11n HT20 2Tx CDD MODE IN THE 5.2 GHz BAND	43
9.3.1. 26 dB BANDWIDTH	43
9.3.2. 99% BANDWIDTH	47
9.3.3. AVERAGE POWER	51
9.3.4. OUTPUT POWER AND PSD	52

9.4.	802.11n HT40 1Tx MODE IN THE 5.2 GHz BAND	57
9.4.1.	26 dB BANDWIDTH.....	57
9.4.2.	99% BANDWIDTH.....	59
9.4.3.	AVERAGE POWER.....	61
9.4.4.	OUTPUT POWER AND PSD.....	62
9.5.	802.11n HT40 2Tx CDD MODE IN THE 5.2 GHz BAND.....	65
9.5.1.	26 dB BANDWIDTH.....	65
9.5.2.	99% BANDWIDTH.....	68
9.5.3.	AVERAGE POWER.....	71
9.5.4.	OUTPUT POWER AND PSD.....	72
9.6.	802.11a 1Tx MODE IN THE 5.3 GHz BAND	76
9.6.1.	26 dB BANDWIDTH.....	76
9.6.2.	99% BANDWIDTH.....	79
9.6.3.	AVERAGE POWER.....	82
9.6.4.	OUTPUT POWER AND PSD.....	83
9.7.	802.11n HT20 1Tx MODE IN THE 5.3 GHz BAND	87
9.7.1.	26 dB BANDWIDTH.....	87
9.7.2.	99% BANDWIDTH.....	90
9.7.3.	AVERAGE POWER.....	93
9.7.4.	OUTPUT POWER AND PSD.....	94
9.8.	802.11n HT20 2Tx CDD MODE IN THE 5.3 GHz BAND.....	98
9.8.1.	26 dB BANDWIDTH.....	98
9.8.2.	99% BANDWIDTH.....	102
9.8.3.	AVERAGE POWER.....	106
9.8.4.	OUTPUT POWER AND PSD.....	107
9.9.	802.11n HT40 1Tx MODE IN THE 5.3 GHz BAND	112
9.9.1.	26 dB BANDWIDTH.....	112
9.9.2.	99% BANDWIDTH.....	114
9.9.3.	AVERAGE POWER.....	116
9.9.4.	OUTPUT POWER AND PSD.....	117
9.10.	802.11n HT40 2Tx CDD MODE IN THE 5.3 GHz BAND	120
9.10.1.	26 dB BANDWIDTH	120
9.10.2.	99% BANDWIDTH	123
9.10.3.	AVERAGE POWER	126
9.10.4.	OUTPUT POWER AND PSD	127
9.11.	802.11a 1Tx MODE IN THE 5.6 GHz BAND	131
9.11.1.	26 dB BANDWIDTH	131
9.11.2.	99% BANDWIDTH	134
9.11.3.	AVERAGE POWER	137
9.11.4.	OUTPUT POWER AND PSD	138
9.12.	802.11n HT20 1Tx MODE IN THE 5.6 GHz BAND.....	142
9.12.1.	26 dB BANDWIDTH	142
9.12.2.	99% Bandwidth	145
9.12.3.	AVERAGE POWER	148
9.12.4.	OUTPUT POWER AND PSD	149
9.13.	802.11n HT20 2Tx CDD MODE IN THE 5.6 GHz BAND	153
9.13.1.	26 dB BANDWIDTH	153
9.13.2.	99% BANDWIDTH	157
9.13.3.	AVERAGE POWER	161

9.13.4.	OUTPUT POWER AND PSD	162
9.14.	802.11n HT40 1Tx MODE IN THE 5.6 GHz BAND	167
9.14.1.	26 dB BANDWIDTH	167
9.14.2.	99% BANDWIDTH	170
9.14.3.	AVERAGE POWER	173
9.14.4.	OUTPUT POWER AND PSD	174
9.15.	802.11n HT40 2Tx CDD MODE IN THE 5.6 GHz BAND	178
9.15.1.	26 dB BANDWIDTH	178
9.15.2.	99% BANDWIDTH	182
9.15.3.	AVERAGE POWER	186
9.15.4.	OUTPUT POWER AND PSD	187
9.16.	802.11a MODE IN THE 5.8 GHz BAND	192
9.16.1.	6 dB BANDWIDTH	192
9.16.2.	26 dB BANDWIDTH	195
9.16.3.	99% BANDWIDTH	198
9.16.4.	AVERAGE POWER	201
9.16.5.	OUTPUT POWER	202
9.16.6.	MAXIMUM POWER SPECTRAL DENSITY (PSD)	204
9.17.	802.11n HT20 1Tx MODE IN THE 5.8 GHz BAND	207
9.17.1.	6 dB BANDWIDTH	207
9.17.2.	26 dB BANDWIDTH	210
9.17.3.	99% BANDWIDTH	213
9.17.4.	AVERAGE POWER	216
9.17.5.	OUTPUT POWER	217
9.17.6.	MAXIMUM POWER SPECTRAL DENSITY (PSD)	219
9.18.	802.11n HT20 2Tx MODE IN THE 5.8 GHz BAND	223
9.18.1.	6 dB BANDWIDTH	223
9.18.2.	26 dB BANDWIDTH	227
9.18.3.	99% BANDWIDTH	231
9.18.4.	AVERAGE POWER	235
9.18.5.	OUTPUT POWER	236
9.18.6.	MAXIMUM POWER SPECTRAL DENSITY (PSD)	238
9.19.	802.11n HT40 1Tx MODE IN THE 5.8 GHz BAND	243
9.19.1.	6 dB BANDWIDTH	243
9.19.2.	26 dB BANDWIDTH	245
9.19.3.	99% BANDWIDTH	247
9.19.4.	AVERAGE POWER	249
9.19.5.	OUTPUT POWER	250
9.19.6.	MAXIMUM POWER SPECTRAL DENSITY (PSD)	252
9.20.	802.11n HT40 2Tx MODE IN THE 5.8 GHz BAND	254
9.20.1.	6 dB BANDWIDTH	254
9.20.2.	26 dB BANDWIDTH	257
9.20.3.	99% BANDWIDTH	260
9.20.4.	AVERAGE POWER	263
9.20.5.	OUTPUT POWER	264
9.20.6.	MAXIMUM POWER SPECTRAL DENSITY (PSD)	266
10.	RADIATED TEST RESULTS	270
10.1.	LIMITS AND PROCEDURE	270

10.2.	TRANSMITTER ABOVE 1 GHz.....	271
10.2.1.	TX ABOVE 1 GHz 802.11a 1Tx MODE IN THE 5.2 GHz BAND.....	271
10.2.2.	TX ABOVE 1 GHz 802.11n HT20 2Tx CDD MODE IN THE 5.2 GHz BAND...	279
10.2.3.	TX ABOVE 1 GHz 802.11n HT40 1Tx MODE IN THE 5.2 GHz BAND	287
10.2.4.	TX ABOVE 1 GHz 802.11n HT40 2Tx CDD MODE IN THE 5.2 GHz BAND...	293
10.2.5.	TX ABOVE 1 GHz 802.11a 1Tx MODE IN THE 5.3 GHz BAND.....	299
10.2.6.	TX ABOVE 1 GHz 802.11n HT20 2Tx CDD MODE IN THE 5.3 GHz BAND...	307
10.2.7.	TX ABOVE 1 GHz 802.11n HT40 1Tx MODE IN THE 5.3 GHz BAND	315
10.2.8.	TX ABOVE 1 GHz 802.11n HT40 2Tx CDD MODE IN THE 5.3 GHz BAND...	321
10.2.9.	TX ABOVE 1 GHz 802.11a 1Tx MODE IN THE 5.6 GHz BAND.....	327
10.2.10.	TX ABOVE 1 GHz 802.11n HT20 2Tx CDD MODE IN THE 5.6 GHz BAND...	336
10.2.11.	TX ABOVE 1 GHz 802.11n HT40 1Tx MODE IN THE 5.6 GHz BAND	345
10.2.12.	TX ABOVE 1 GHz 802.11n HT40 2Tx CDD MODE IN THE 5.6 GHz BAND.....	354
10.2.13.	TX ABOVE 1 GHz 802.11a 1Tx MODE IN THE 5.8 GHz BAND.....	363
10.2.14.	TX ABOVE 1 GHz 802.11n HT20 2Tx CDD MODE IN THE 5.8 GHz BAND...	371
10.2.15.	TX ABOVE 1 GHz 802.11n HT40 1Tx MODE IN THE 5.8 GHz BAND	379
10.2.16.	TX ABOVE 1 GHz 802.11n HT40 2Tx CDD MODE IN THE 5.8 GHz BAND...	385
10.3.	WORST-CASE BELOW 1 GHz	391
10.4.	WORST-CASE 18 to 26 GHz	393
10.5.	WORST-CASE 26 to 40 GHz	394
11.	AC POWER LINE CONDUCTED EMISSIONS	395
12.	DYNAMIC FREQUENCY SELECTION	398
12.1.	OVERVIEW.....	398
12.1.1.	LIMITS	398
12.1.2.	TEST AND MEASUREMENT SYSTEM	402
12.1.3.	SETUP OF EUT (CLIENT MODE).....	405
12.1.4.	SETUP OF EUT (CLIENT-TO-CLIENT COMMUNICATIONS MODE)	406
12.1.5.	DESCRIPTION OF EUT	407
12.2.	CLIENT MODE RESULTS FOR 20 MHz BANDWIDTH.....	408
12.2.1.	TEST CHANNEL	408
12.2.2.	RADAR WAVEFORM AND TRAFFIC	408
12.2.3.	OVERLAPPING CHANNEL TESTS	410
12.2.4.	MOVE AND CLOSING TIME.....	410
12.3.	CLIENT MODE RESULTS FOR 40 MHz BANDWIDTH.....	415
12.3.1.	TEST CHANNEL.....	415
12.3.2.	RADAR WAVEFORM AND TRAFFIC	415
12.3.3.	OVERLAPPING CHANNEL TESTS	417
12.3.4.	MOVE AND CLOSING TIME.....	417
12.3.5.	NON-OCCUPANCY PERIOD.....	422
12.4.	CLIENT-TO-CLIENT COMMUNICATIONS MODE RESULTS FOR 20 MHz BANDWIDTH.....	423
12.4.1.	TEST CHANNEL	423
12.4.2.	RADAR WAVEFORM AND TRAFFIC	423
12.4.3.	OVERLAPPING CHANNEL TESTS	425
12.4.4.	MOVE AND CLOSING TIME.....	425
12.5.	CLIENT-TO-CLIENT COMMUNICATIONS MODE RESULTS FOR 40 MHz BANDWIDTH.....	430

12.5.1.	TEST CHANNEL	430
12.5.2.	RADAR WAVEFORM AND TRAFFIC	430
12.5.3.	OVERLAPPING CHANNEL TESTS	432
12.5.4.	MOVE AND CLOSING TIME.....	432
SETUP PHOTOS		436

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: APPLE, INC.
1 INFINITE LOOP
CUPERTINO, CA 95014, U.S.A.

EUT DESCRIPTION: TABLET DEVICE

MODEL: A1599

SERIAL NUMBER: F4KMV00EG535 (Conducted), F4KMQ002G3RM (Radiated)

DATE TESTED: MAY 12, 2014 – AUGUST 4, 2014

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart E	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.


Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:



FRANCISCO DE ANDA
PROJECT LEAD
UL VERIFICATION SERVICES INC.

Tested By:



CHRIS XIONG
EMC TECHNICIAN
UL VERIFICATION SERVICES INC.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, FCC KDB 662911 D01, FCC KDB 789033 and ANSI C63.10-2009.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
☐ Chamber A	☒ Chamber D
☐ Chamber B	☒ Chamber E
☐ Chamber C	☒ Chamber F
	☒ Chamber G
	☒ Chamber H

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned}\text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m}\end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	± 3.52 dB
Radiated Disturbance, 30 to 1000 MHz	± 4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a tablet with IEEE 802.11a/b/g/n (MIMO 2x2) and Bluetooth radio. The rechargeable battery is not user accessible.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5180 - 5240	802.11a	15.79	37.93
5180 - 5240	802.11n HT20 1Tx	15.86	38.55
5180 - 5240	802.11n HT20 2Tx	18.83	76.38
5190 - 5230	802.11n HT40 1Tx	15.89	38.82
5190 - 5230	802.11n HT40 2Tx	18.99	79.25
5260 - 5320	802.11a	15.80	38.02
5260 - 5320	802.11n HT20 1Tx	15.92	39.08
5260 - 5320	802.11n HT20 2Tx	18.85	76.74
5270 - 5310	802.11n HT40 1Tx	15.85	38.46
5270 - 5310	802.11n HT40 2Tx	18.99	79.25
5500 - 5700	802.11a	15.22	33.27
5500 - 5700	802.11n HT20 1Tx	15.33	34.12
5500 - 5700	802.11n HT20 2Tx	18.31	67.76
5510 - 5670	802.11n HT40 1Tx	15.46	35.16
5510 - 5670	802.11n HT40 2Tx	18.42	69.50
5745 - 5825	802.11a	15.32	34.04
5745 - 5825	802.11n HT20 1Tx	15.34	34.20
5745 - 5825	802.11n HT20 2Tx	18.40	69.18
5755 - 5795	802.11n HT40 1Tx	15.55	35.89
5755 - 5795	802.11n HT40 2Tx	18.51	70.96

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a PiFA antenna, with a maximum gain as below table:

Frequency (MHz)	Antenna Gain	
	Chain 0	Chain 1
5150 – 5250	-0.02	3.06
5250 – 5350	0.75	3.25
5500 -- 5700	2.43	4.29

5.4. SOFTWARE AND FIRMWARE

The firmware installed in the EUT during testing was 6.25.86

The test utility software used during testing was wl 6.25 RC87.120

5.5. WORST-CASE CONFIGURATION AND MODE

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X (Flatbed), Y (Landscape), Z (Portrait), it was determined that X orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in Y (Landscape) orientation.

Worst-case data rates as provided by the client were:

802.11a mode: 6 Mbps
802.11n HT20mode: MCS0
802.11n HT40mode: MCS0

Radiated emissions for EUT with antenna was performed and passed; therefore, antenna port spurious was not performed.

There are two vendors of the WiFi/Bluetooth radio modules: variant 1 and variant 2. They have the same mechanical outline, same on board antenna, matching circuit, antenna structure and same specification. Baseline testing was performed on the two variants to determine the worst case on all conducted power and radiated emissions.

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC/DC adapter	Apple	A1357	N/A	NA
Earphone	Apple	NA	NA	NA
Laptop	Apple	A1278	C02HJ0A7DTY4	NA
DC power supply	Sorensen	XT 15-4	1319A02780	NA

I/O CABLES (CONDUCTED TEST)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	Antenna	1	SMA	Un-Shielded	0.2	To spectrum Analyzer
2	USB	1	USB	Shielded	1	N/A
3	DC	1	DC	Un-shielded	0.8	N/A

I/O CABLES (RADIATED ABOVE 1 GHZ)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
None used						


I/O CABLES (AC POWER CONDUCTED TEST and below 1 GHZ)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	1	US115	Un-Shielded	0.8	NA
2	DC	1	lightning	Un-Shielded	1	NA
3	Audio	1	Jack	Un-Shielded	0.5	NA

TEST SETUP- CONDUCTED PORT

The EUT was tested connected to a host Laptop via USB cable adapter and spectrum analyzer to antenna port. Test software exercised the EUT.


SETUP DIAGRAM

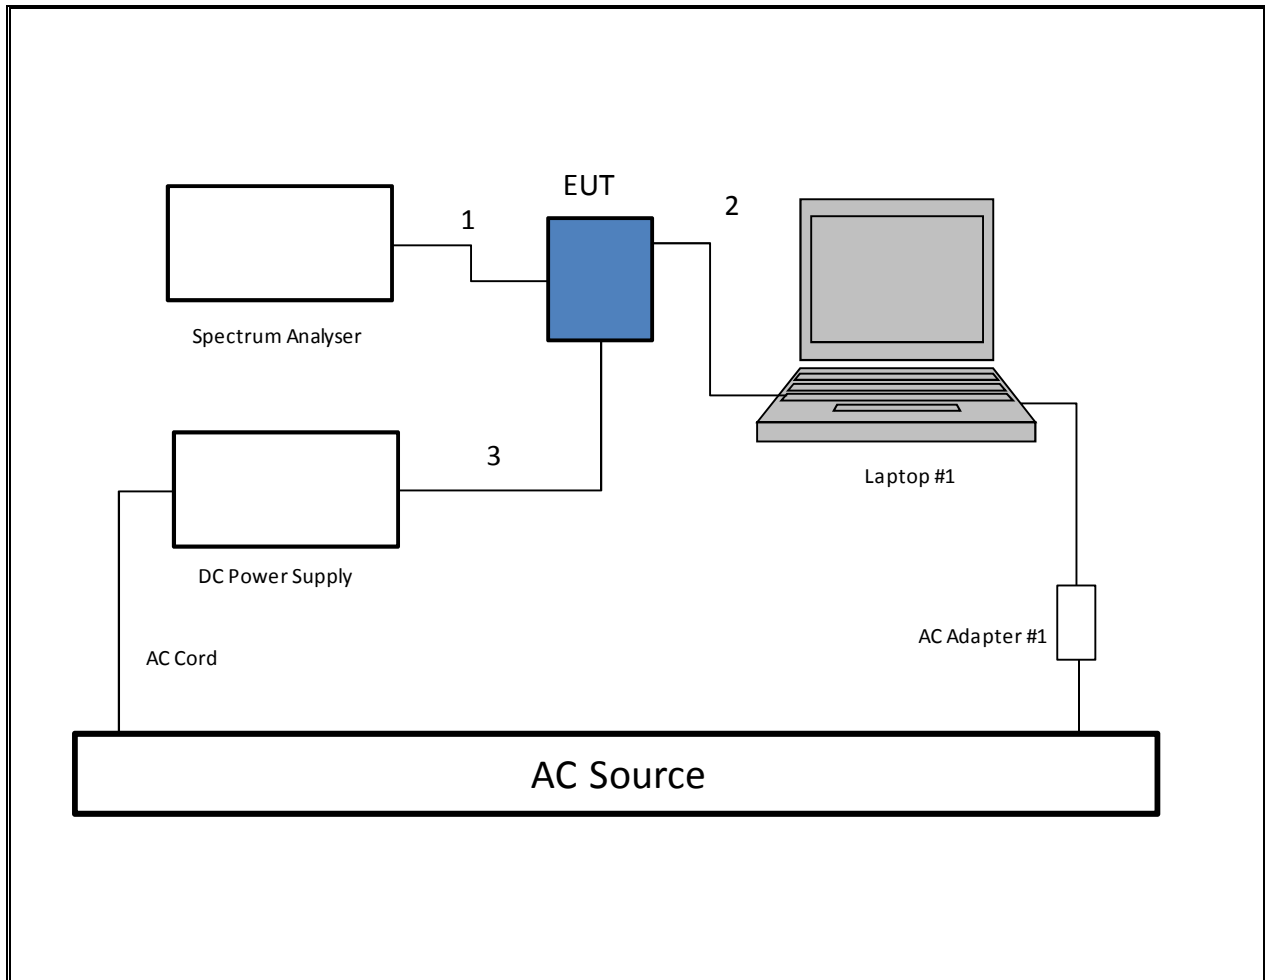

TEST SETUP- RADIATED-ABOVE 1 GHZ

The EUT was tested battery powered. Test software exercised the EUT.


SETUP DIAGRAM

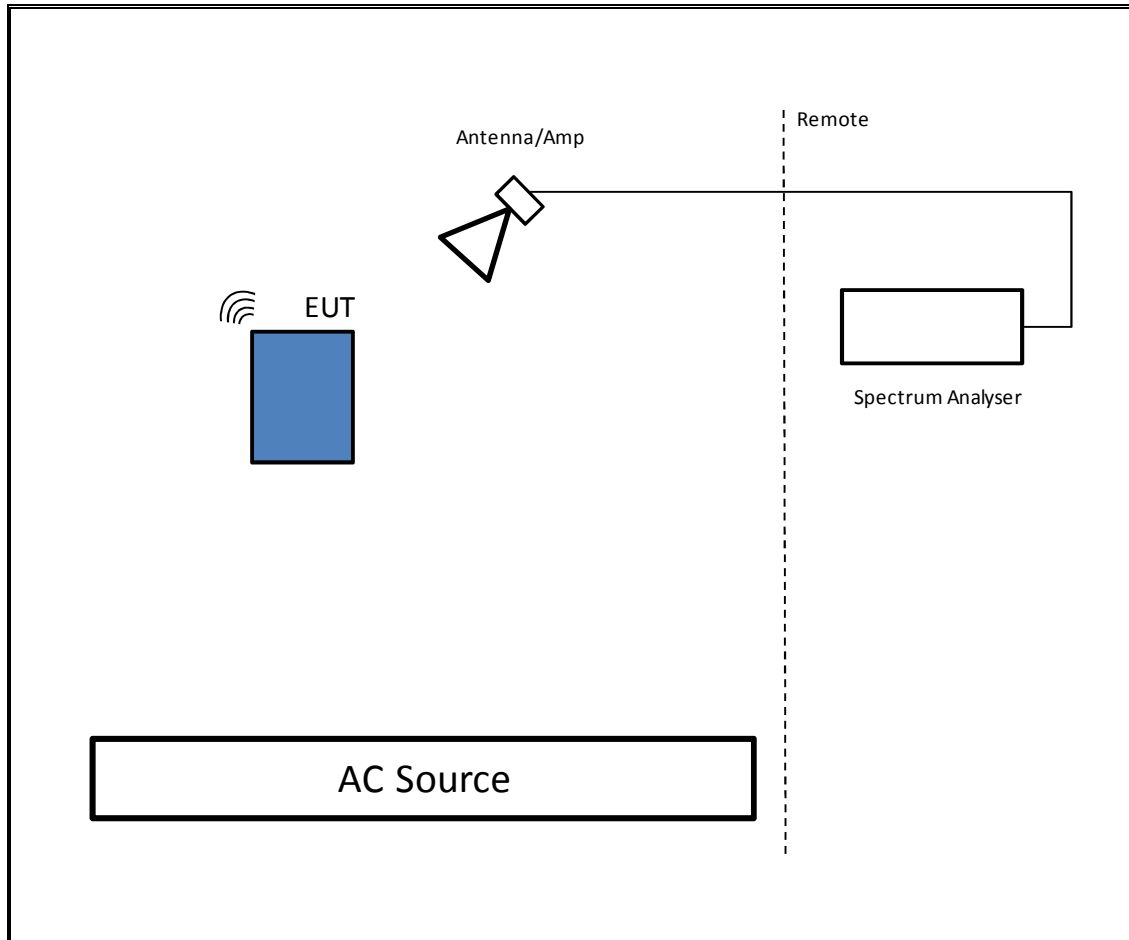

TEST SETUP- BELOW 1GHZ & AC LINE CONDUCTED TESTS

The EUT was tested with earphones connected and powered by AC adapter. Test software exercised the EUT.

SETUP DIAGRAM

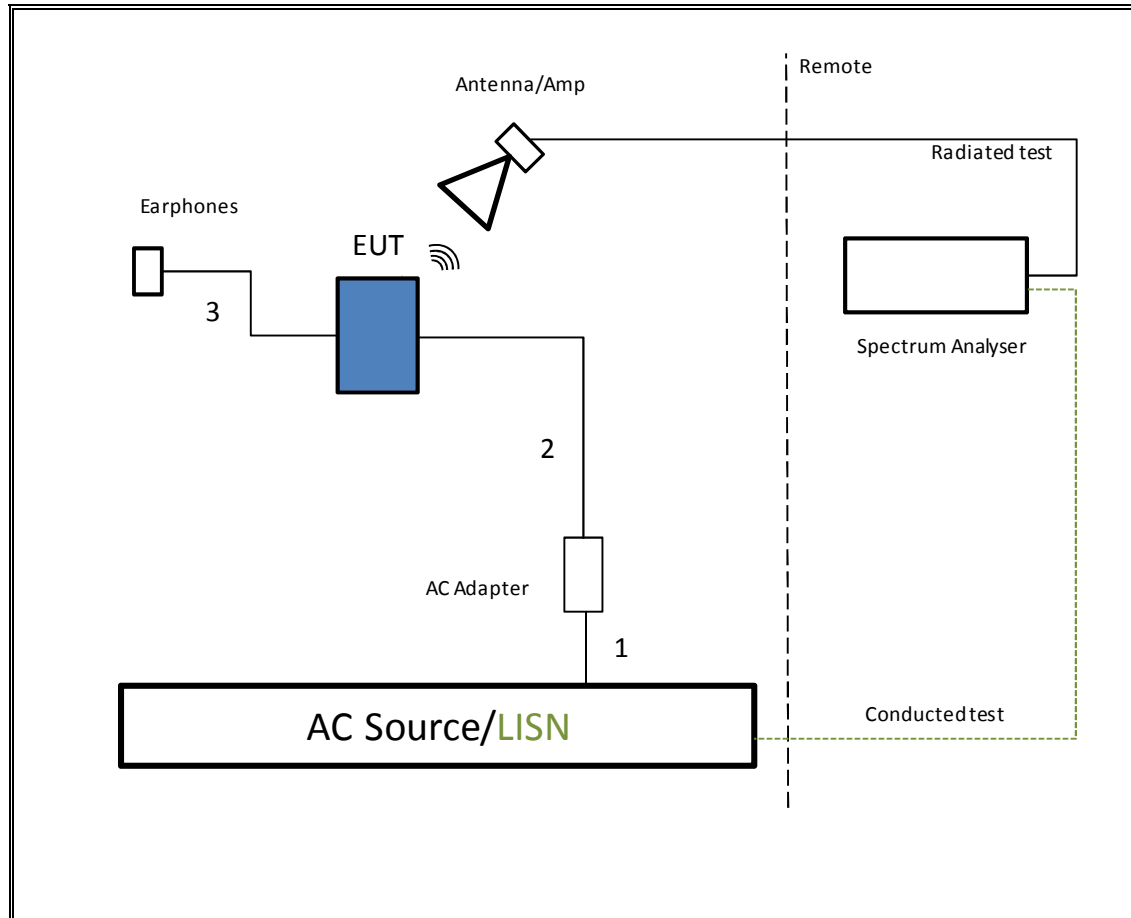

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Antenna, Horn, 18 GHz	ETS Lindgren	3117	F00131	02/18/15
Antenna, Horn, 26.5 GHz	ARA	MWH-1826/B	C00589	11/26/14
Antenna, Horn, 40 GHz	ARA	MWH-2640/B	C00981	06/28/15
Peak / Average Power Sensor	Agilent / HP	N1911A	F00153	03/06/15
Peak Power Meter	Agilent / HP	E9323A	F00025	04/30/15
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	F00129	06/25/15
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	F00411	03/21/15
Spectrum Analyzer, 40 GHz	Agilent / HP	8564E	C00951	08/06/15
Antenna, Bilog, 2 GHz	Sunol Sciences	JB1	F00168	03/28/15
Preamplifier, 1300 MHz	Sonoma	310	F00008	05/27/15
Preamplifier, 26.5 GHz	Agilent / HP	8449B	F00165	03/25/15
Preamplifier, 40 GHz	Miteq	NSP4000-SP2	C00990	08/20/14
EMI Test Receiver, 9 kHz-7 GHz	R & S	ESCI 7	F00092	09/05/14
LISN, 30 MHz	FCC	LISN-50/250-25-2	C00626	01/14/15

Note: Analyzer C00951 was not used from 7/24/14 to 8/7/14 due to needed calibration.

7. MEASUREMENT METHODS

26 dB Emission BW: KDB 789033 D02 v01, Section C.

99% Occupied BW: KDB 789033 D02 v01, Section D.

Power and PPSD: KDB 789033 D02 v01, Method SA-1 and SA-1 Alternative.

Power Spectral Density: KDB 789033 D02 v01, Section F.

Unwanted emissions in restricted bands: KDB 789033 D02 v01, Sections G.3, G.4, G.5, and G.6.

Unwanted emissions in non-restricted bands: KDB 789033 D02 v01, Sections G.3, G.4, and G.5.

8. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS

LIMITS



None; for reporting purposes only.

PROCEDURE

KDB 789033 Zero-Span Spectrum Analyzer Method.

8.1. ON TIME AND DUTY CYCLE RESULTS

Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/B Minimum VBW (kHz)
802.11a 1TX	2.065	2.095	0.986	98.57%	0.00	0.010
802.11n HT20 1TX	1.905	1.935	0.984	98.45%	0.00	0.010
802.11n HT40 1TX	0.932	0.960	0.971	97.12%	0.13	1.073

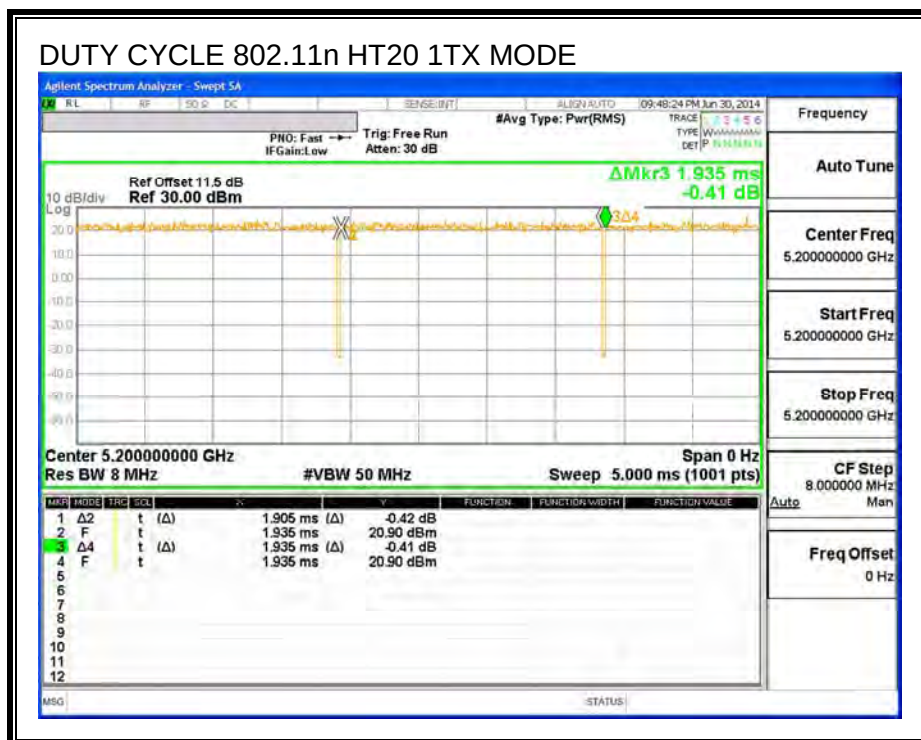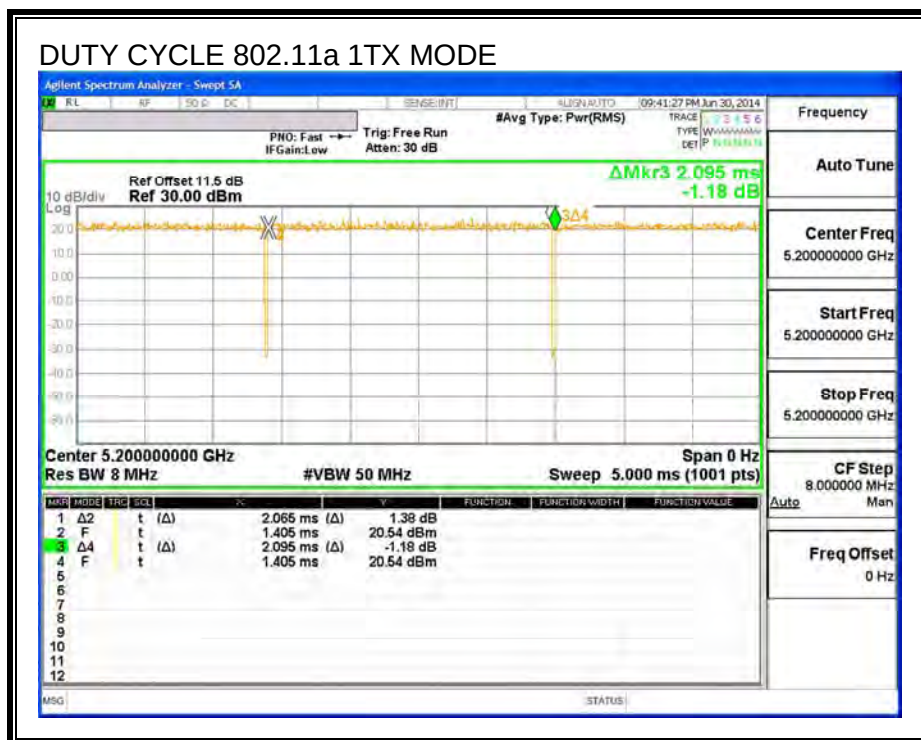



9. ANTENNA PORT TEST RESULTS

9.1. 802.11a 1Tx MODE IN THE 5.2 GHz BAND

9.1.1. 26 dB BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5180	20.34
Mid	5200	20.34
High	5240	20.40

26 dB BANDWIDTH

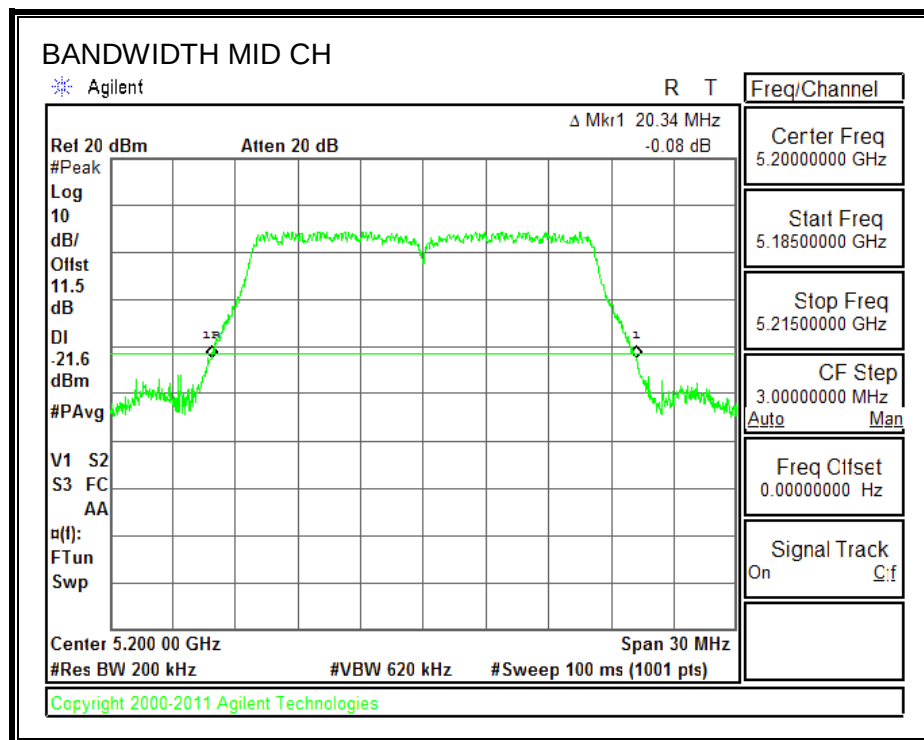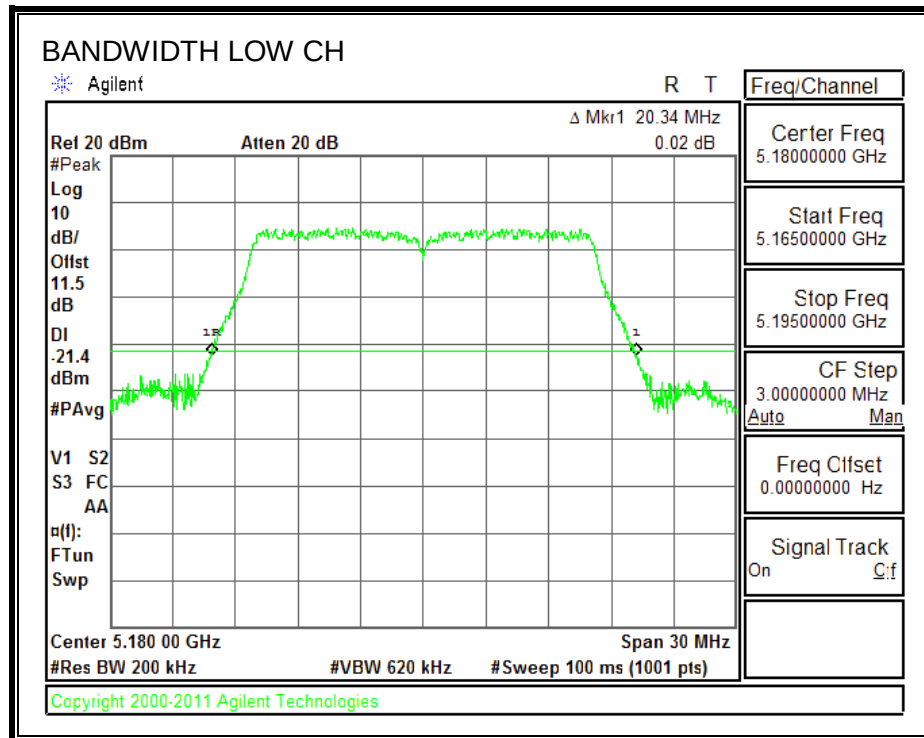

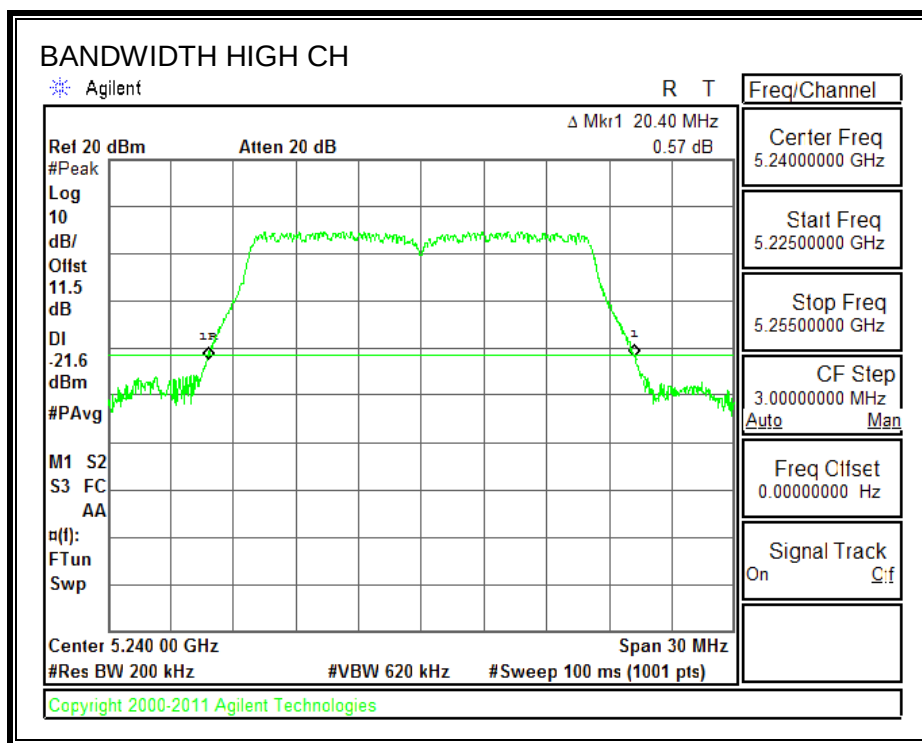

9.1.2. 99% BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5180	16.472
Mid	5200	16.478
High	5240	16.474

99% BANDWIDTH

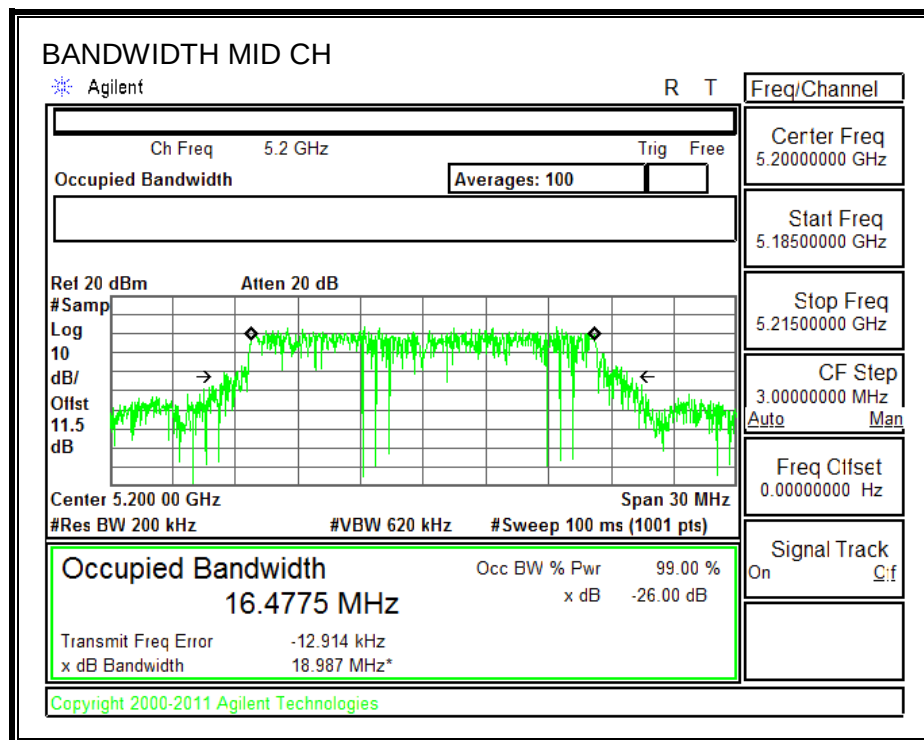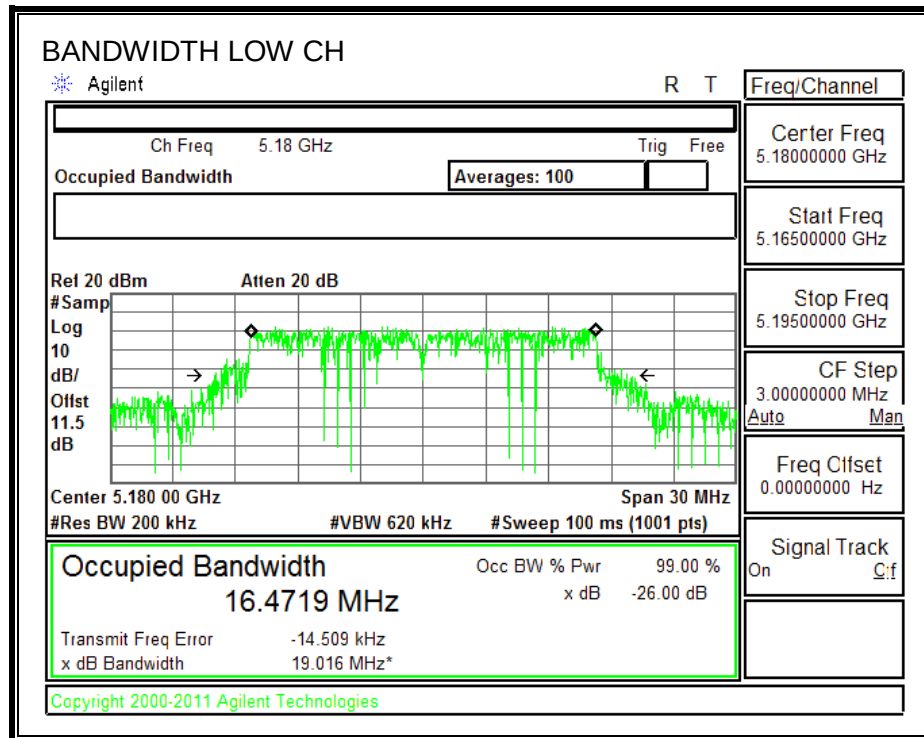

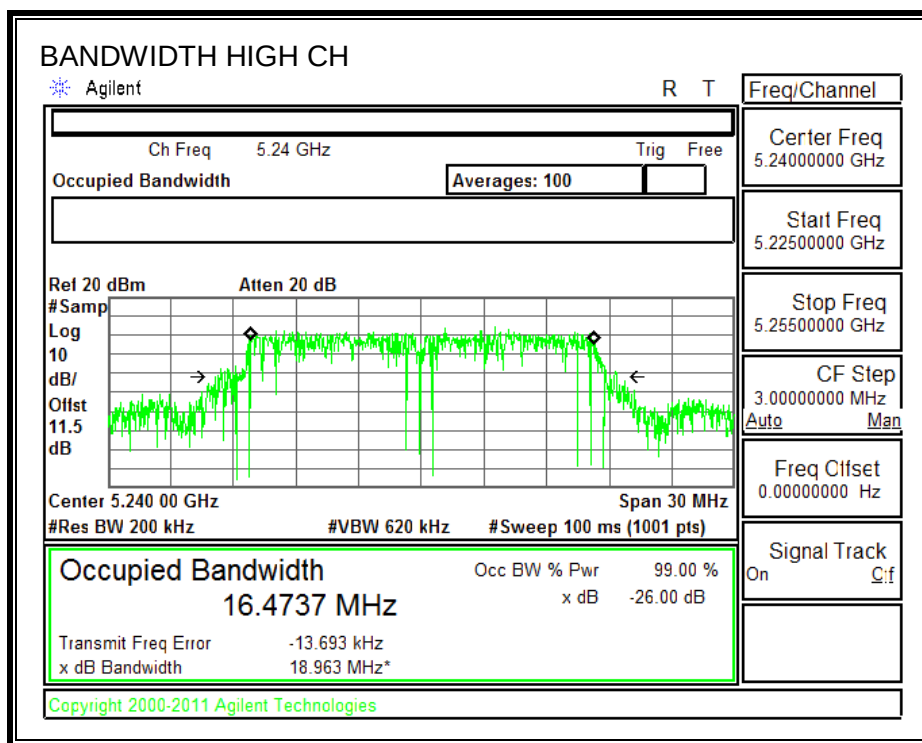

9.1.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter. The power meter was setup for a gated power measurement.

The cable assembly insertion loss of 11.5 dB (including 10 dB pad and 1.5 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

Channel	Frequency (MHz)	Power (dBm)
Low	5180	15.75
Mid	5200	15.67
High	5240	15.79

9.1.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (1)

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

The transmitter output is connected to a power meter. The power meter was setup for a gated power measurement.

The cable assembly insertion loss of 11.5 dB (including 10 dB pad and 1.5 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

Antenna Gain (dBi)
3.06

RESULTS

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5180	3.06	3.06	24.00	11.00
Mid	5200	3.06	3.06	24.00	11.00
High	5240	3.06	3.06	24.00	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--



Output Power Results


Channel	Frequency (MHz)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	15.75	15.75	24.00	-8.25
Mid	5200	15.77	15.77	24.00	-8.23
High	5240	15.79	15.79	24.00	-8.21

PSD Results

Channel	Frequency (MHz)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5180	4.63	4.63	11.00	-6.37
Mid	5200	4.60	4.60	11.00	-6.40
High	5240	4.73	4.73	11.00	-6.27

PSD, Chain 1

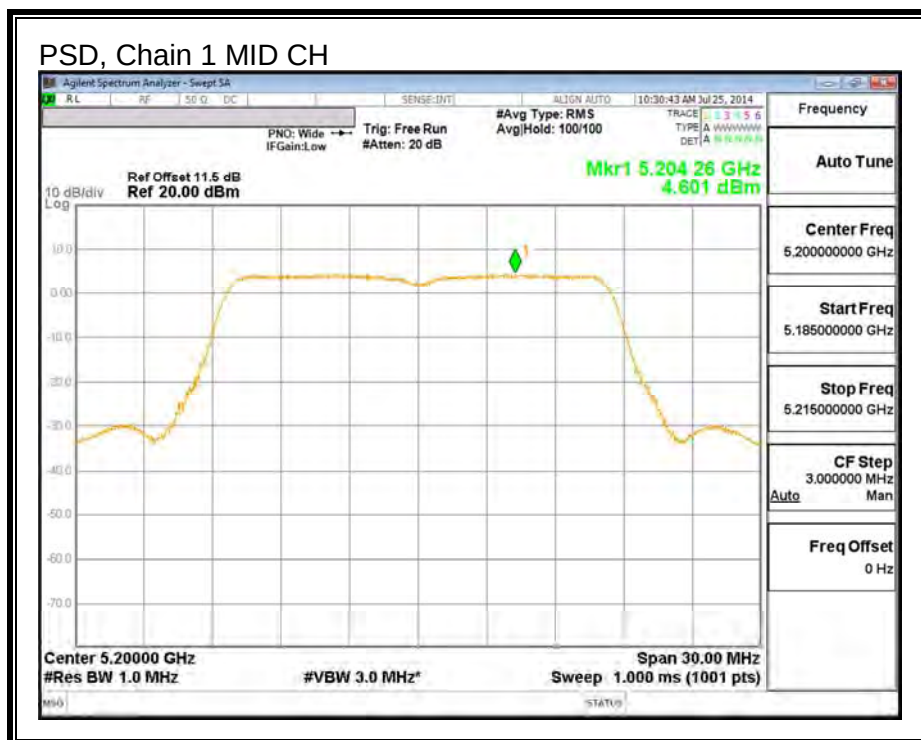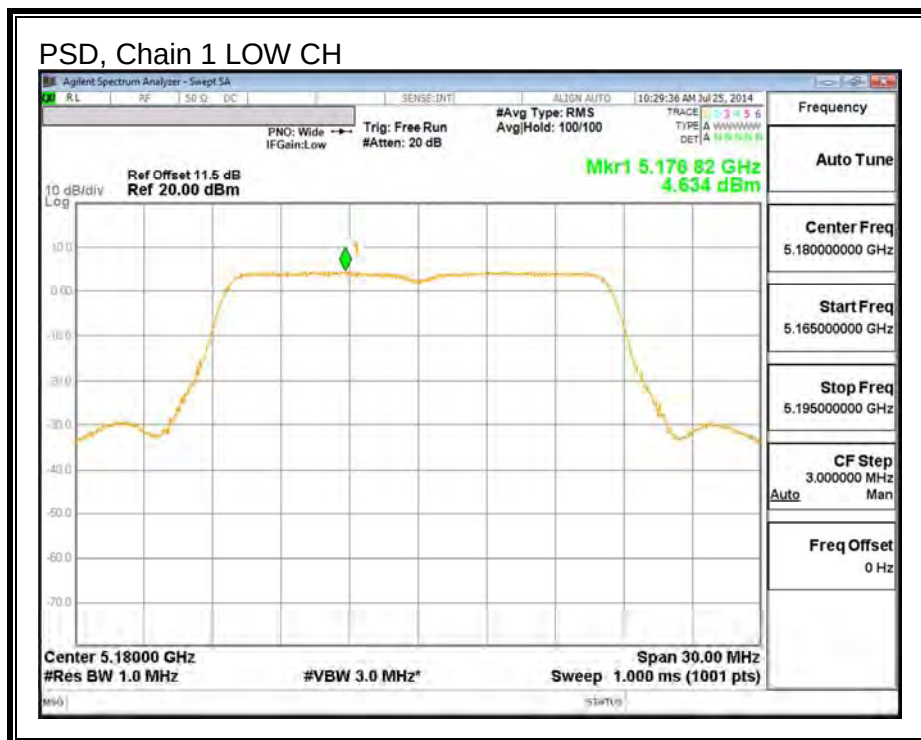

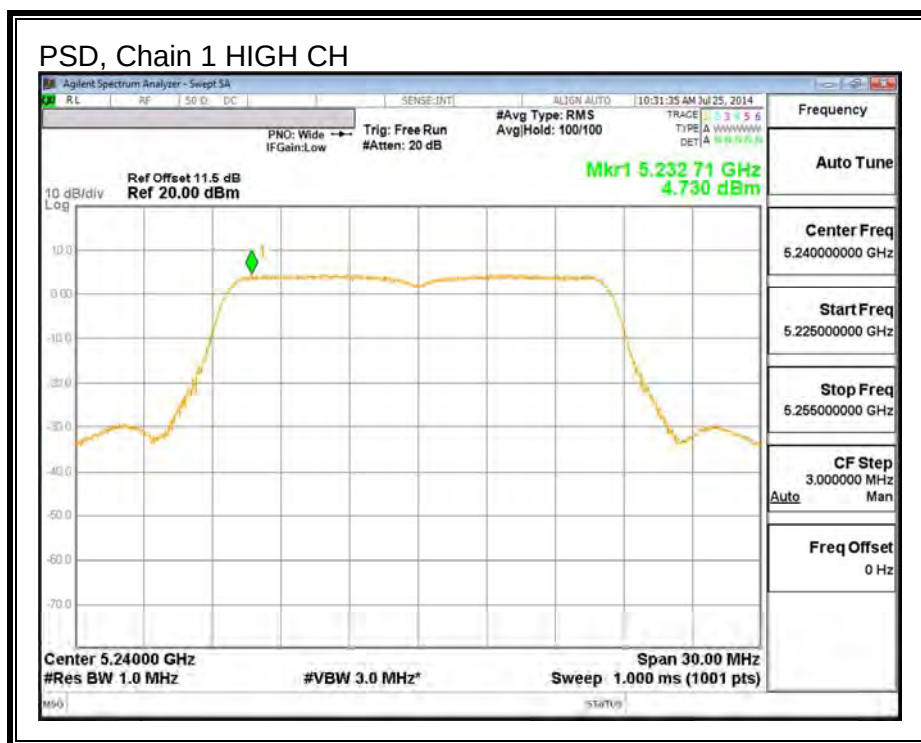

9.2. 802.11n HT20 1Tx MODE IN THE 5.2 GHz BAND

9.2.1. 26 dB BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5180	20.43
Mid	5200	20.67
High	5240	20.67

26 dB BANDWIDTH

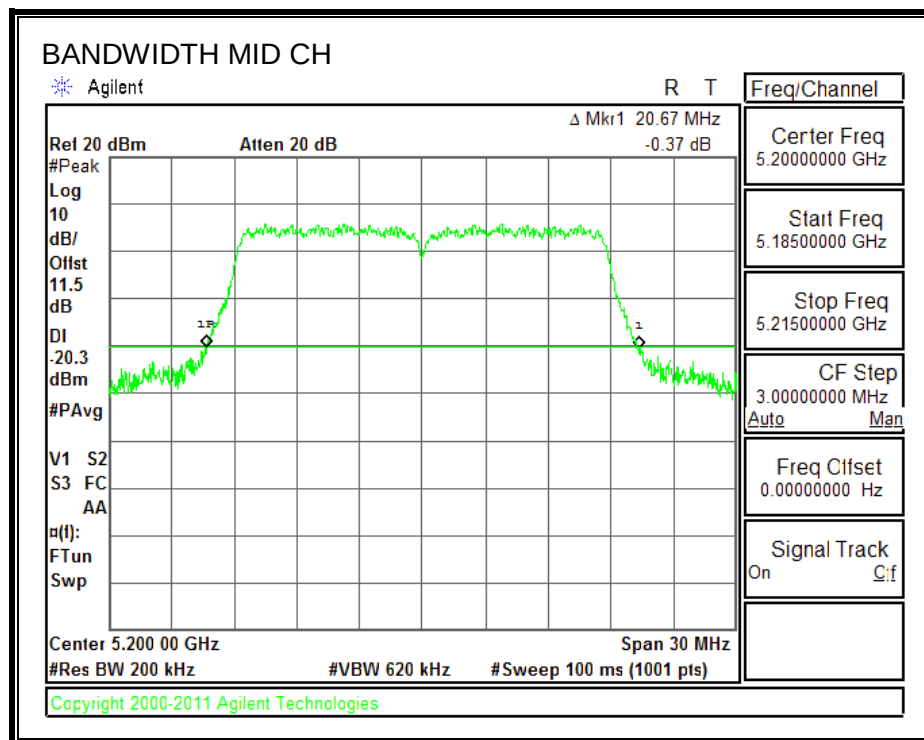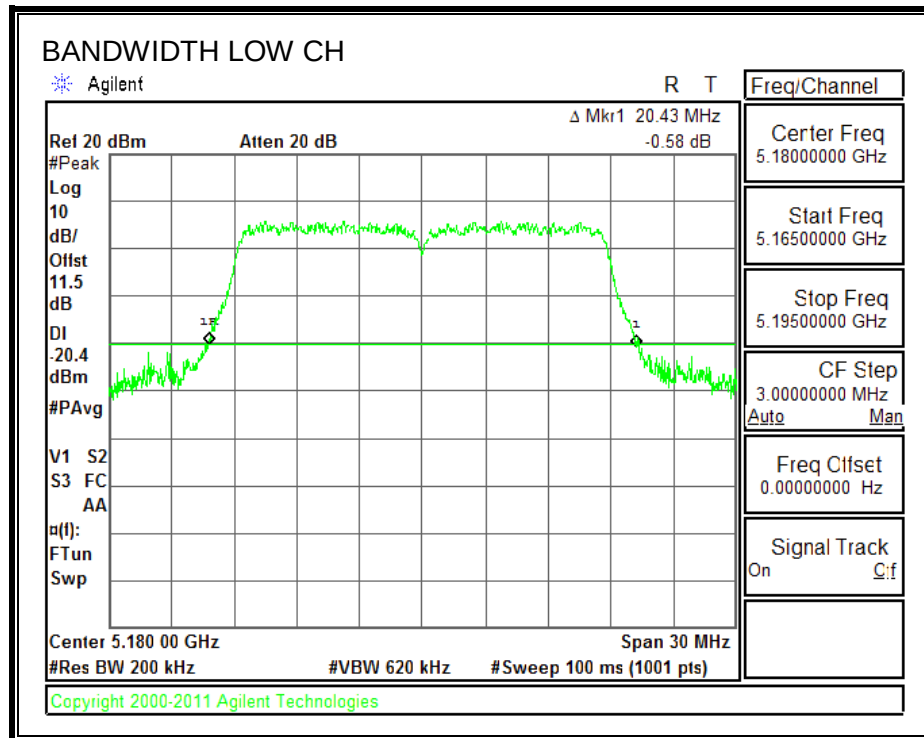

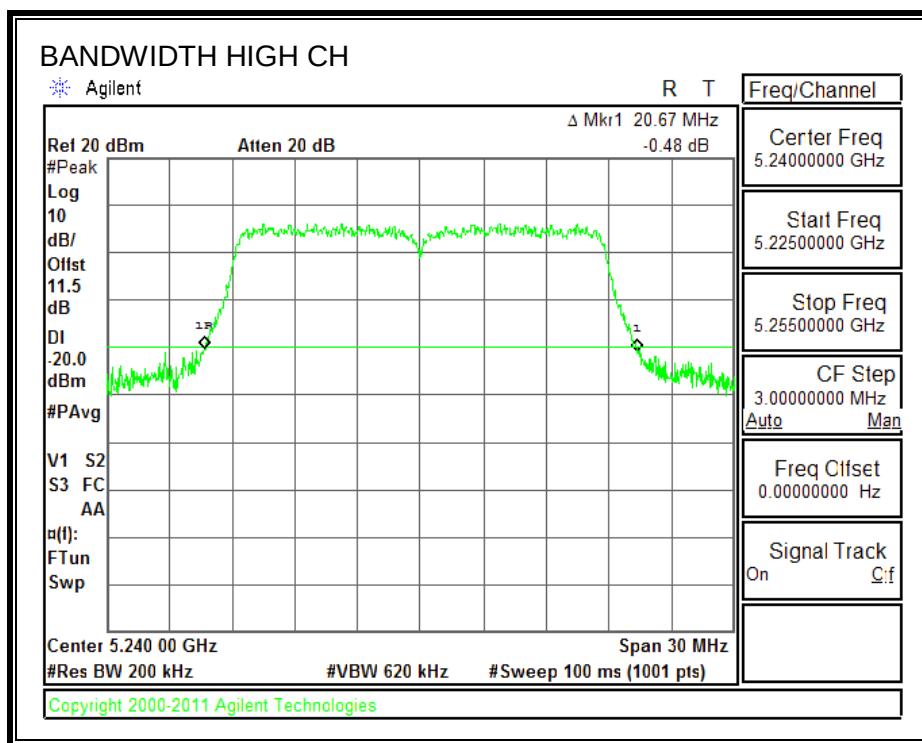

9.2.2. 99% BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5180	17.612
Mid	5200	17.619
High	5240	17.612

99% BANDWIDTH

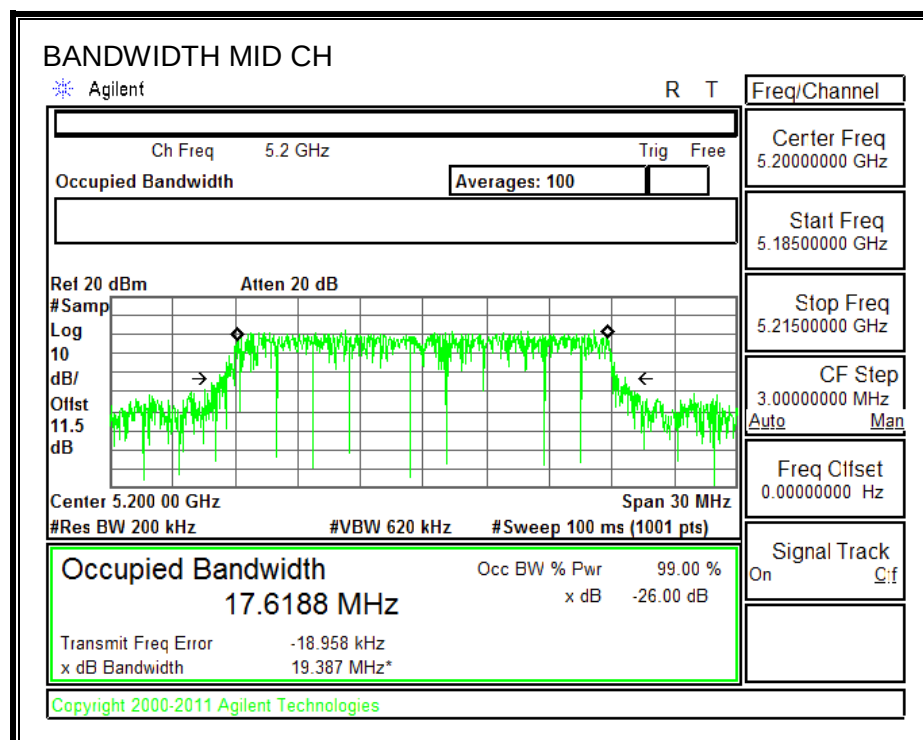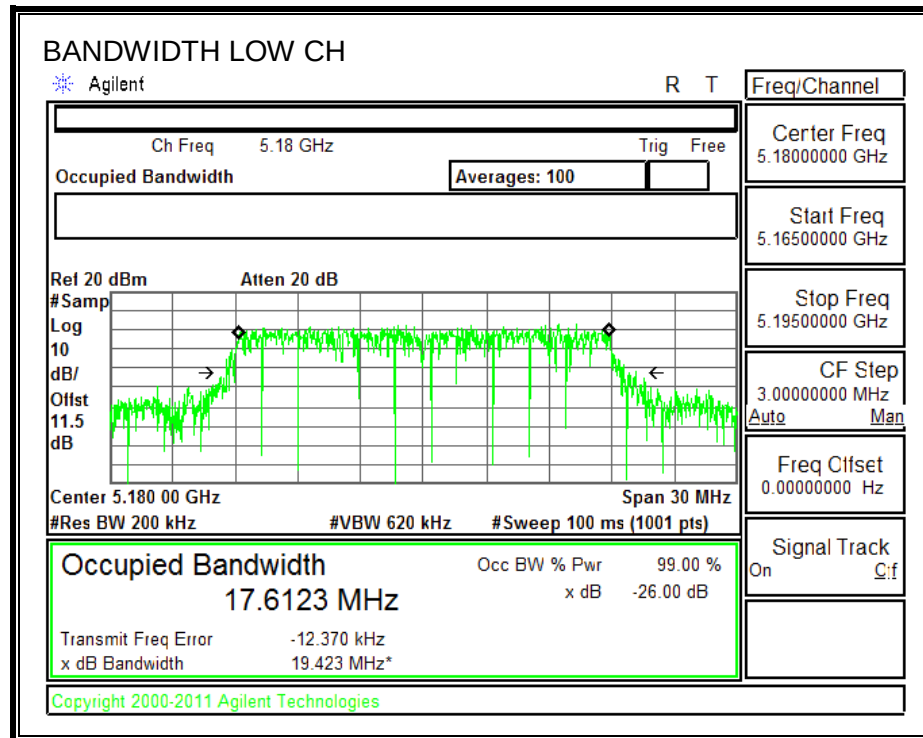

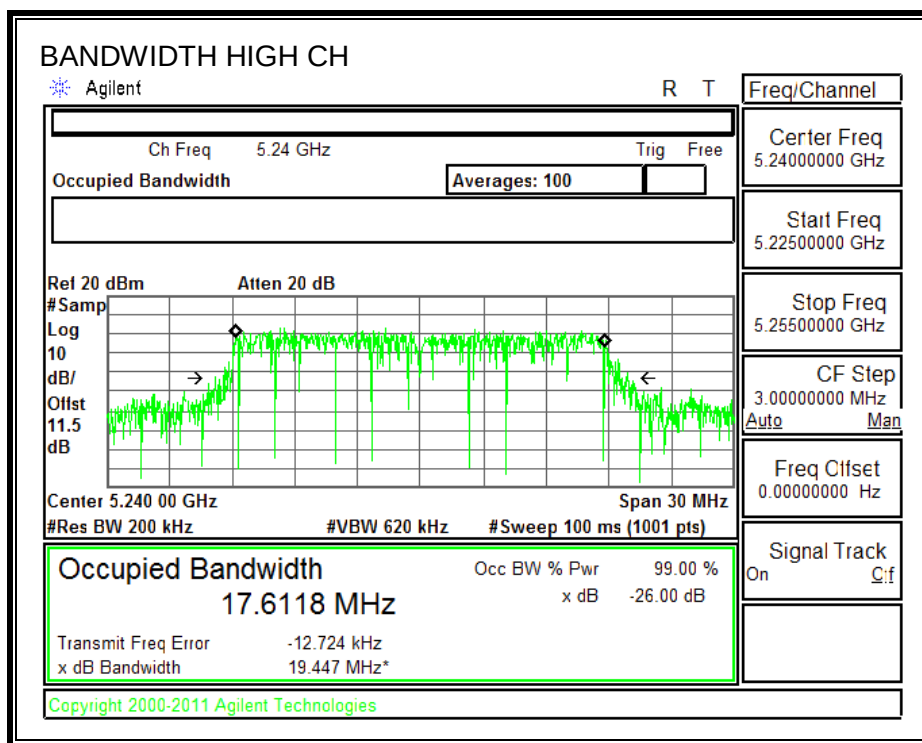

9.2.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter. The power meter was setup for a gated power measurement.

The cable assembly insertion loss of 11.5 dB (including 10 dB pad and 1.5 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

Channel	Frequency (MHz)	Power (dBm)
Low	5180	15.80
Mid	5200	15.86
High	5240	15.74

9.2.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (1)

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

The transmitter output is connected to a power meter. The power meter was setup for a gated power measurement.

The cable assembly insertion loss of 11.5 dB (including 10 dB pad and 1.5 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

Antenna Gain (dBi)
3.06

RESULTS

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5180	3.06	3.06	24.00	11.00
Mid	5200	3.06	3.06	24.00	11.00
High	5240	3.06	3.06	24.00	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--



Output Power Results


Channel	Frequency (MHz)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	15.80	15.80	24.00	-8.20
Mid	5200	15.86	15.86	24.00	-8.14
High	5240	15.74	15.74	24.00	-8.26

PSD Results

Channel	Frequency (MHz)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5180	4.97	4.97	11.00	-6.03
Mid	5200	4.54	4.54	11.00	-6.46
High	5240	4.36	4.36	11.00	-6.65

PSD, Chain 1

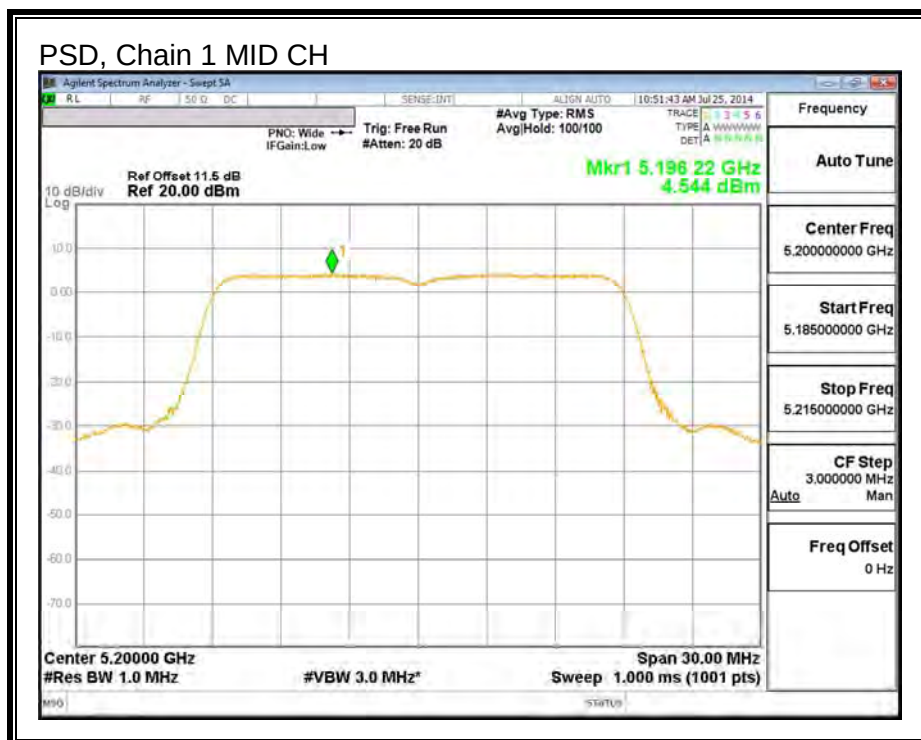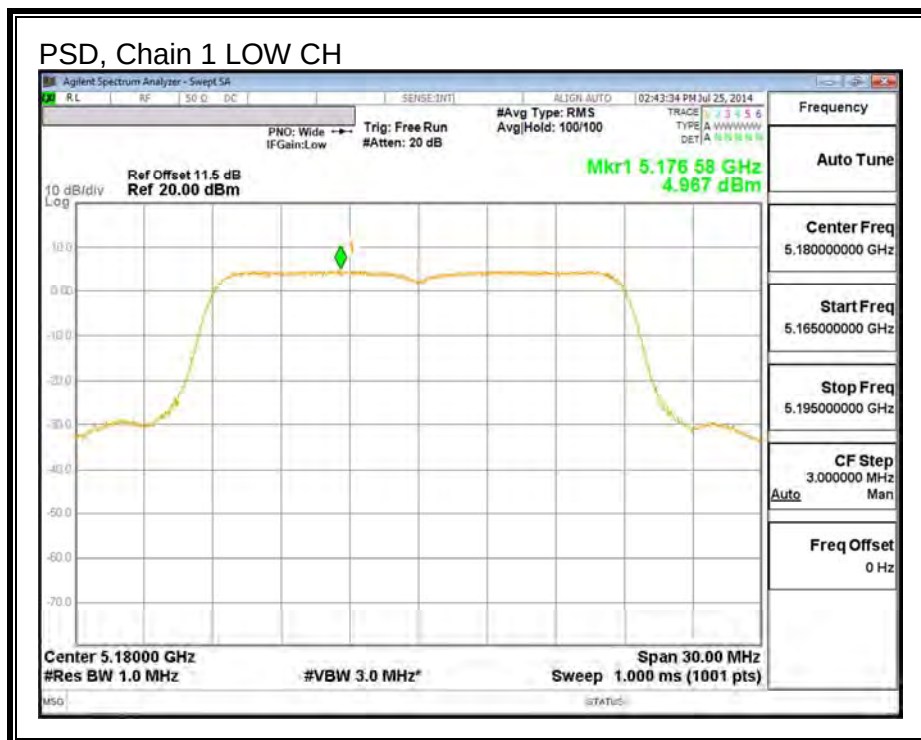

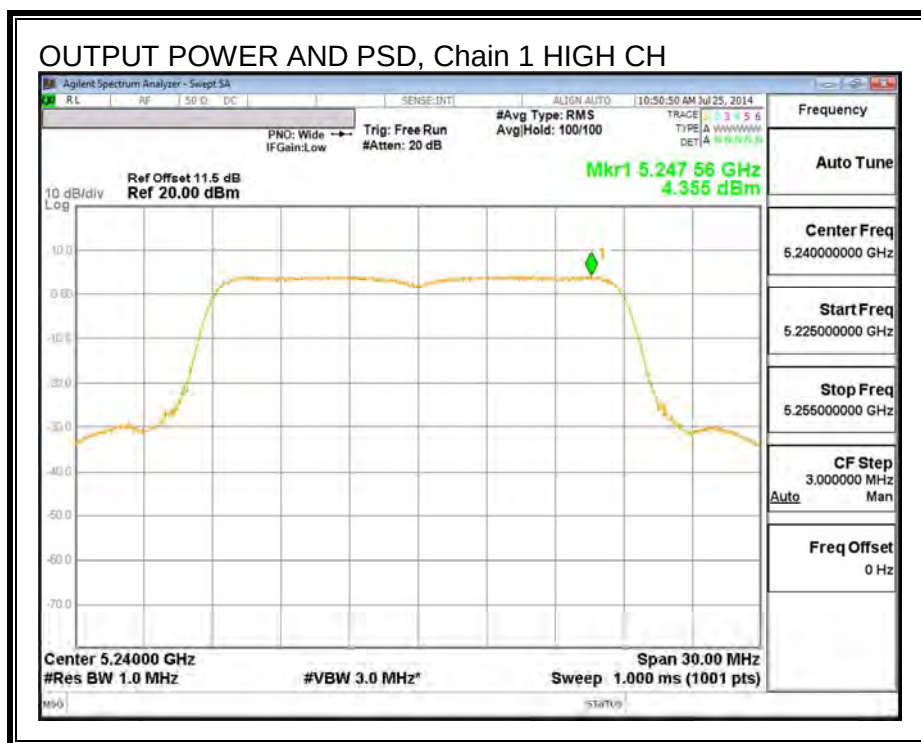

9.3. 802.11n HT20 2Tx CDD MODE IN THE 5.2 GHz BAND

9.3.1. 26 dB BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS


Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)
Low	5180	20.58	20.64
Mid	5200	20.79	20.52
High	5240	20.70	20.64



26 dB BANDWIDTH, Chain 0

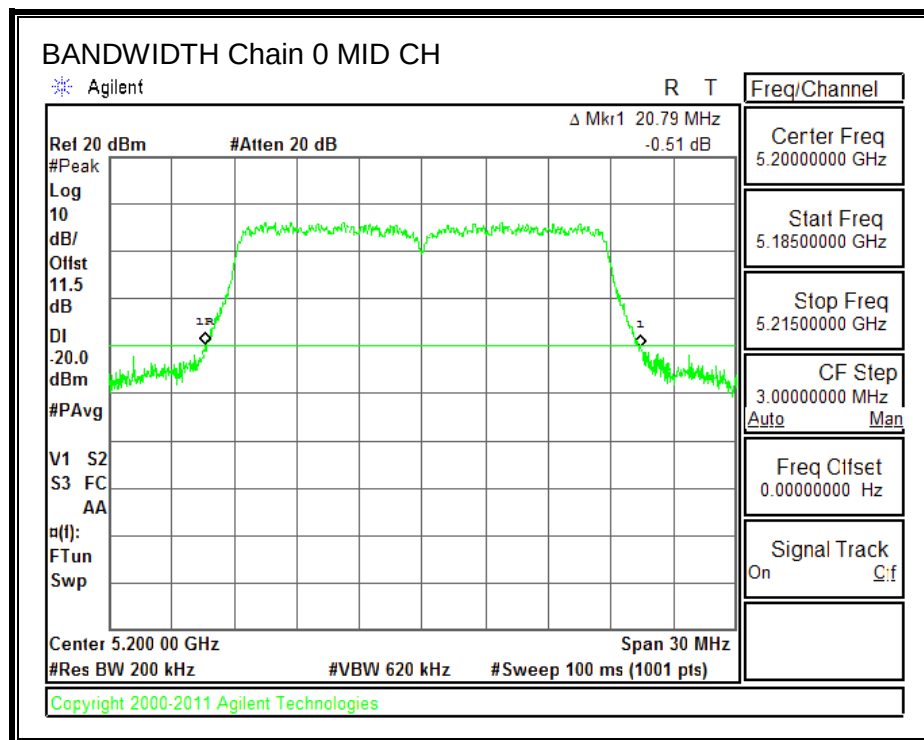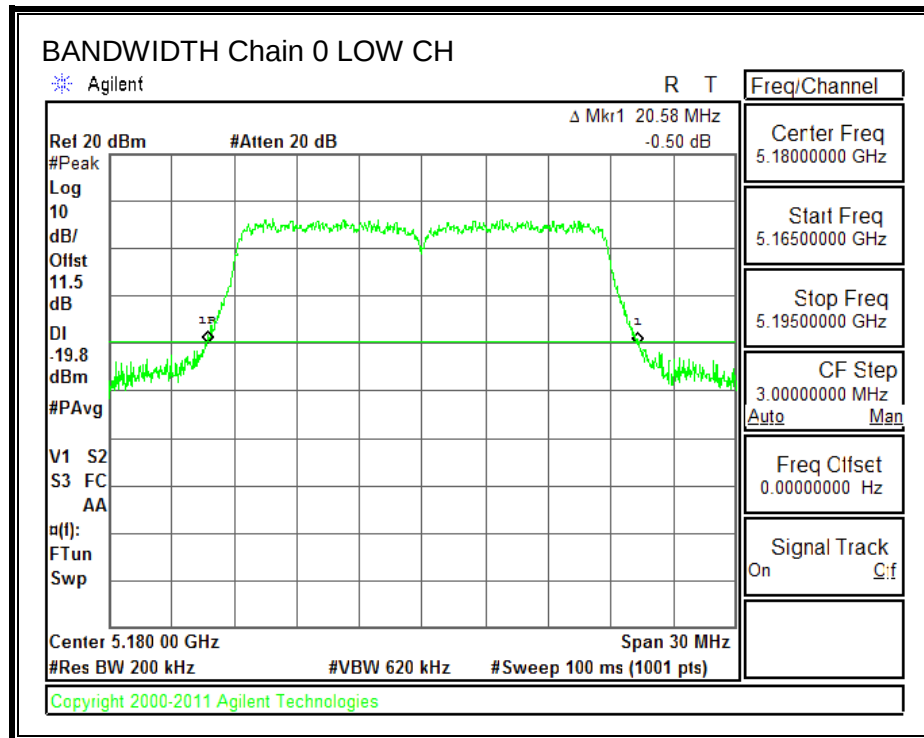

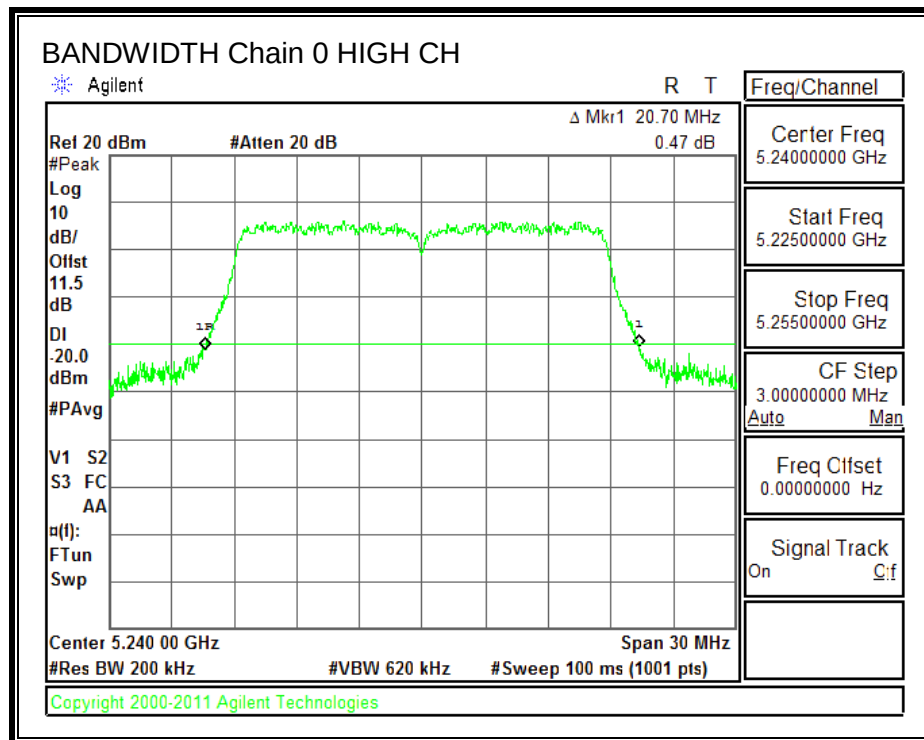

26 dB BANDWIDTH, Chain 1

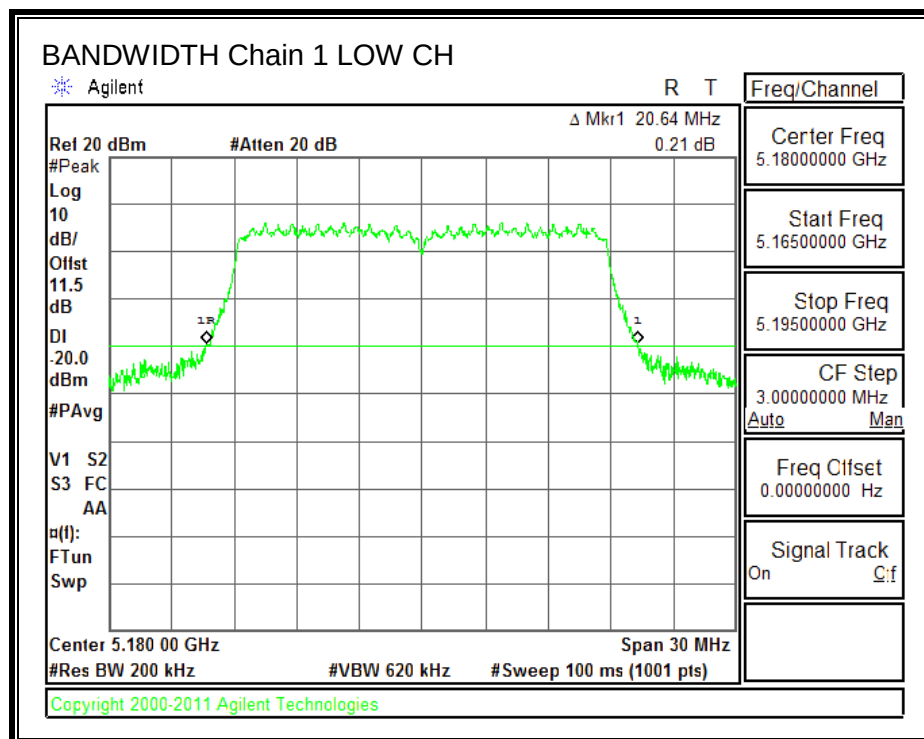

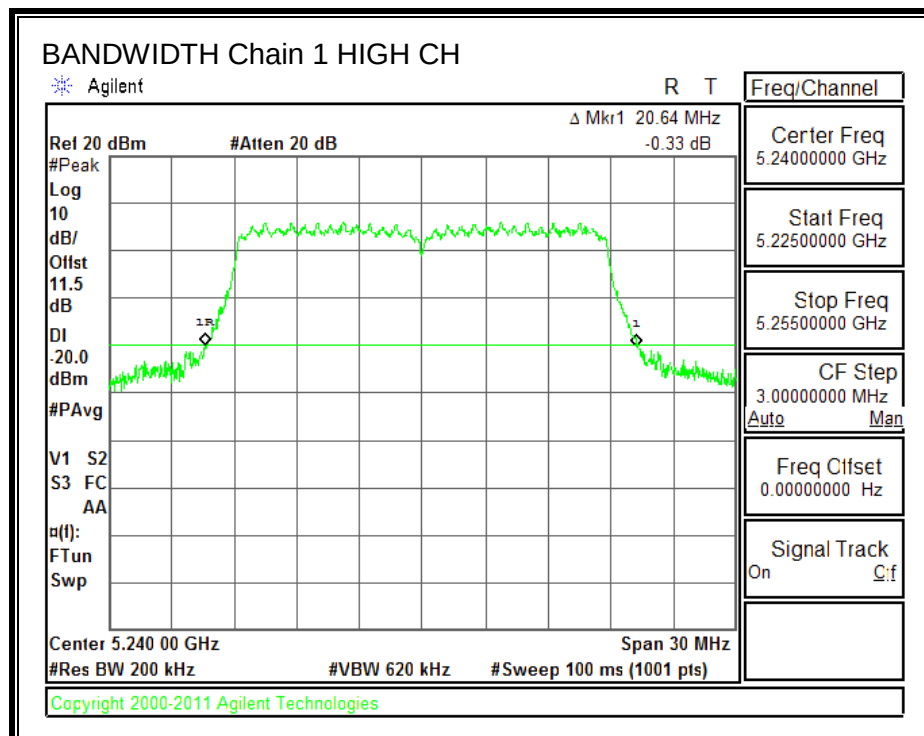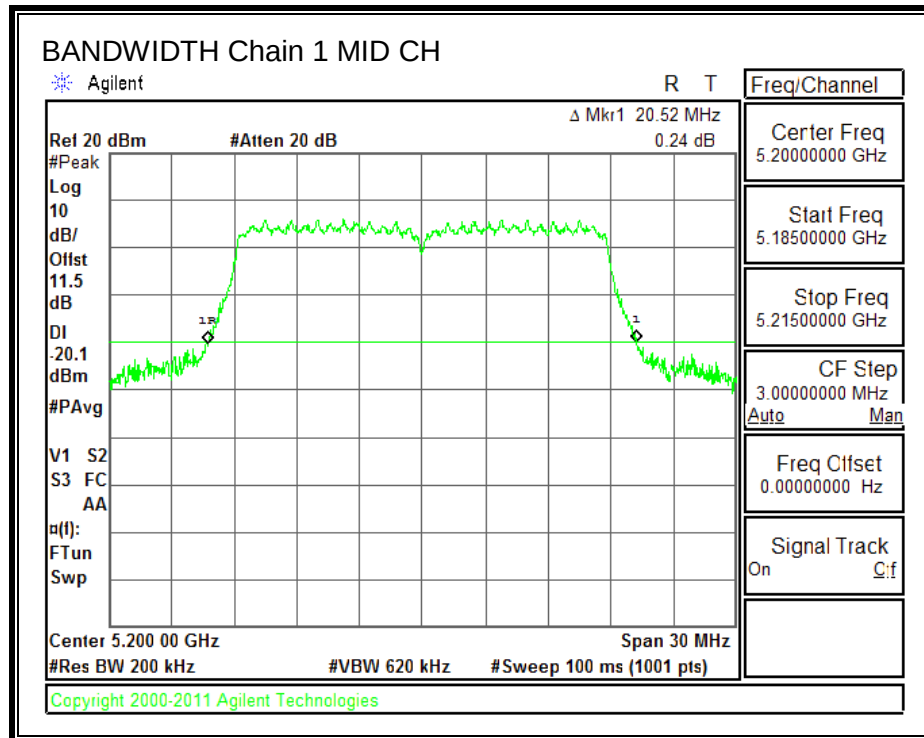

9.3.2. 99% BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS


Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)
Low	5180	17.6	17.6
Mid	5200	17.6	17.6
High	5240	17.6	17.6



99% BANDWIDTH, Chain 0

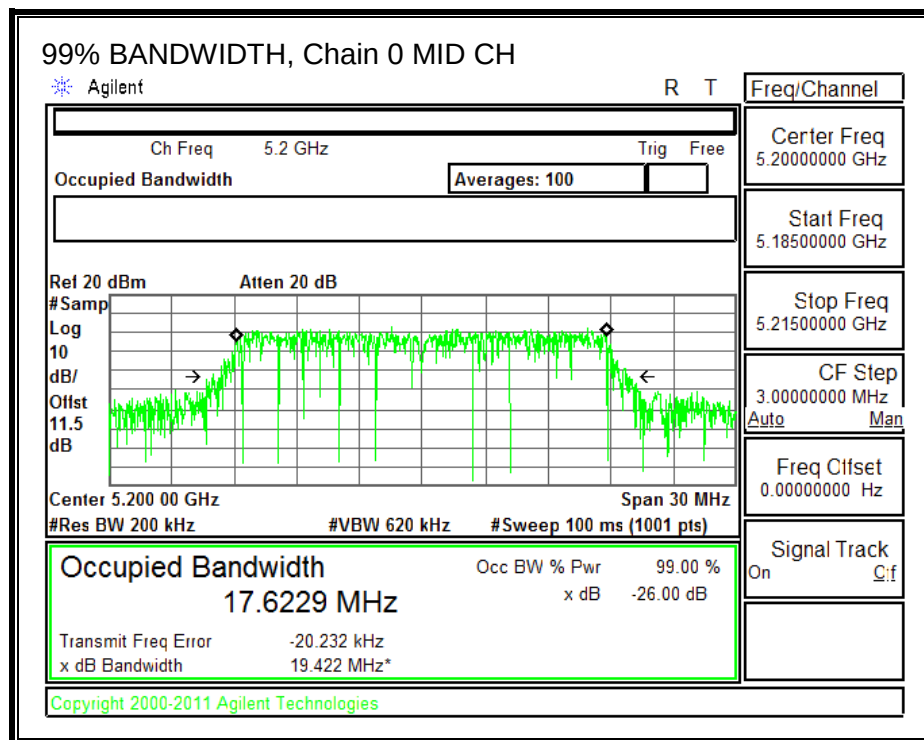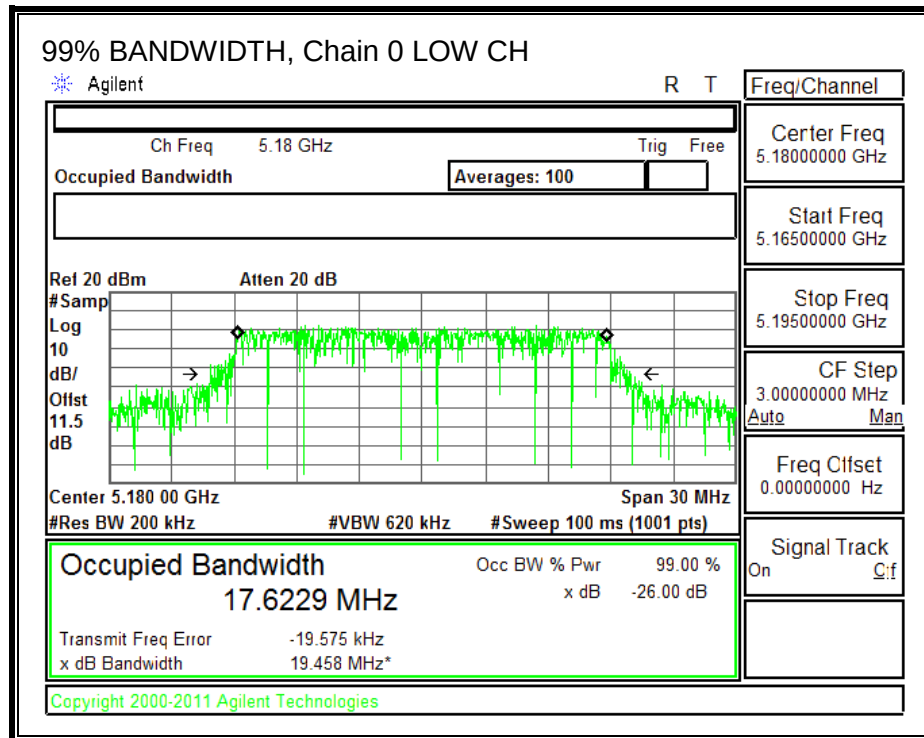

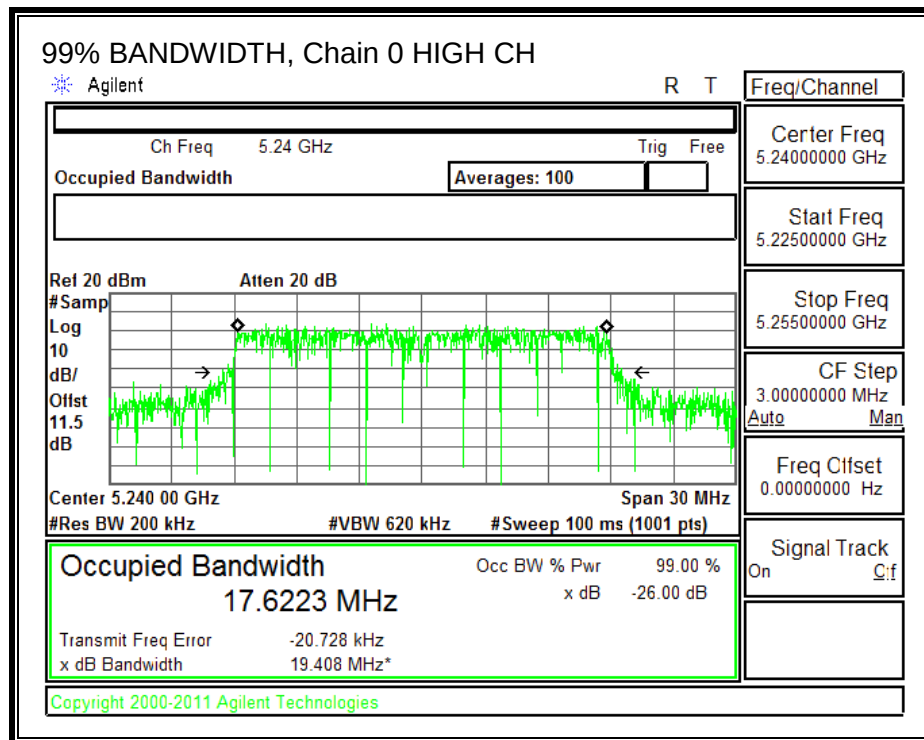

99% BANDWIDTH, Chain 1

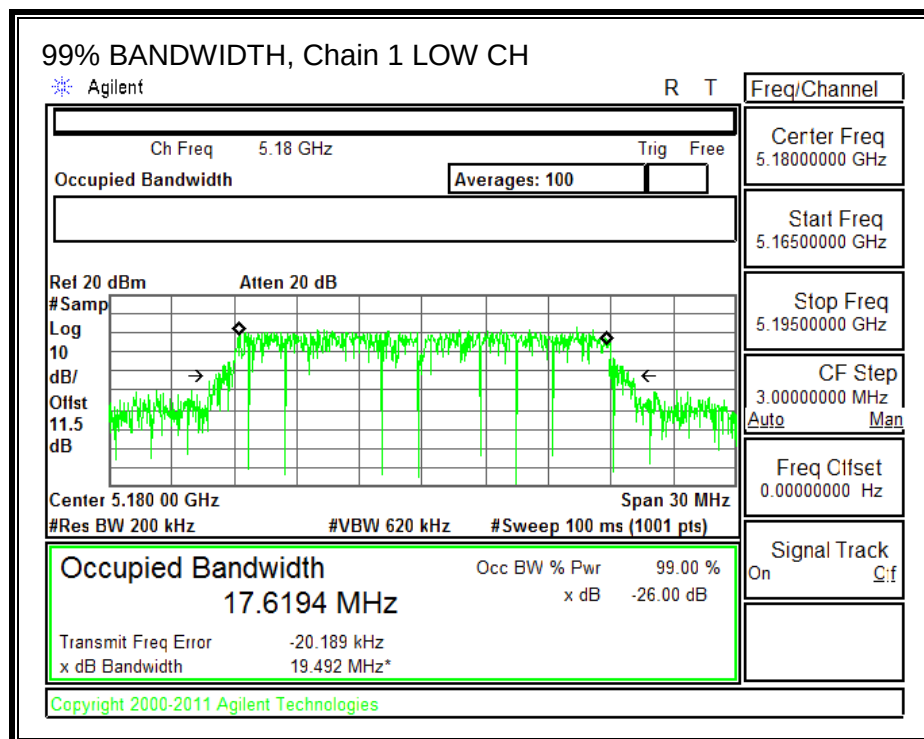

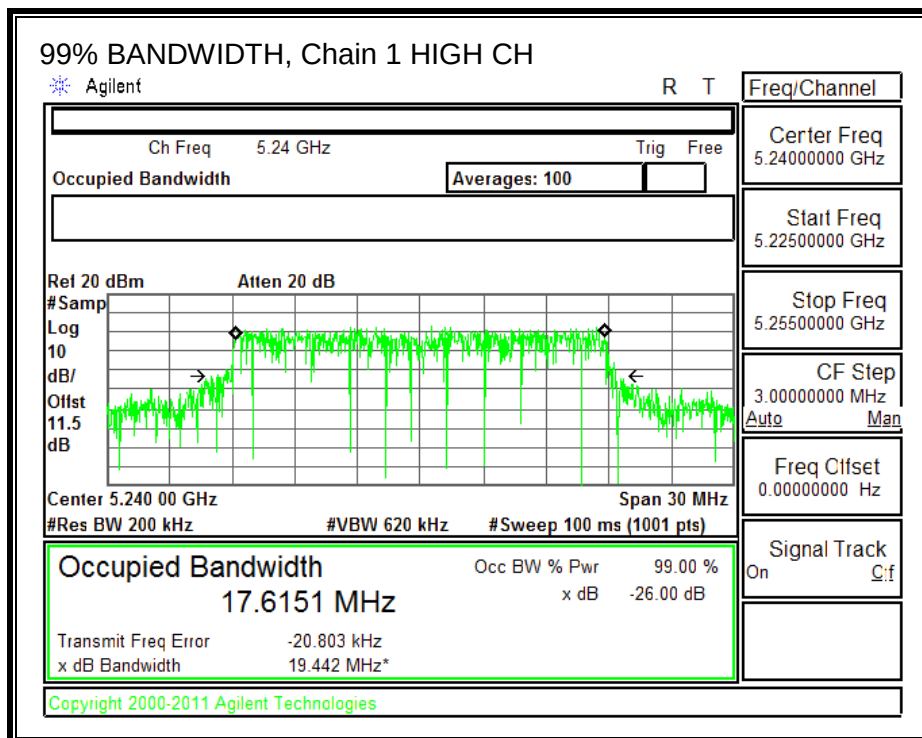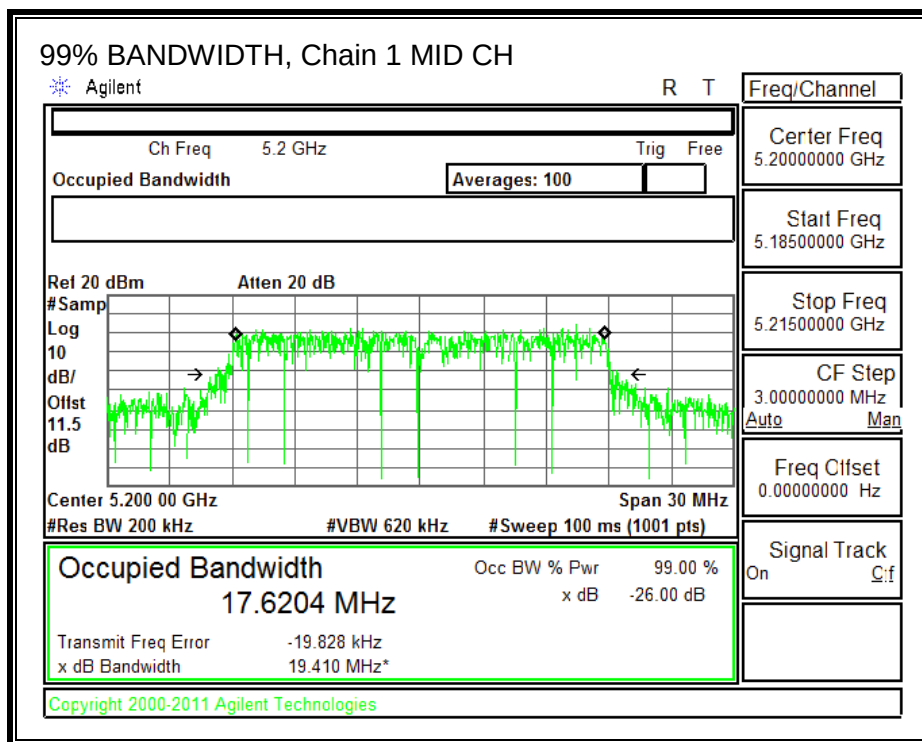

9.3.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter. The power meter was setup for a gated power measurement.

The cable assembly insertion loss of 11.5 dB (including 10 dB pad and 1.5 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

Average Power Results

Channel	Frequency (MHz)	Chain 0 Power (dBm)	Chain 1 Power (dBm)	Total Power (dBm)
Low	5180	15.73	15.85	18.80
Mid	5200	15.82	15.82	18.83
High	5240	15.78	15.72	18.76

9.3.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (1)

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

The transmitter output is connected to a power meter. The power meter was setup for a gated power measurement.

The cable assembly insertion loss of 11.5 dB (including 10 dB pad and 1.5 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
-0.02	3.06	1.79

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Correlated Chains Directional Gain (dBi)
-0.02	3.06	4.67

RESULTS

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5180	1.79	4.67	24.00	11.00
Mid	5200	1.79	4.67	24.00	11.00
High	5240	1.79	4.67	24.00	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--



Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	15.73	15.85	18.80	24.00	-5.20
Mid	5200	15.82	15.82	18.83	24.00	-5.17
High	5240	15.78	15.72	18.76	24.00	-5.24


PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5180	5.46	5.49	8.48	11.00	-2.52
Mid	5200	5.41	5.53	8.48	11.00	-2.52
High	5240	5.49	5.15	8.34	11.00	-2.66

PSD, Chain 0

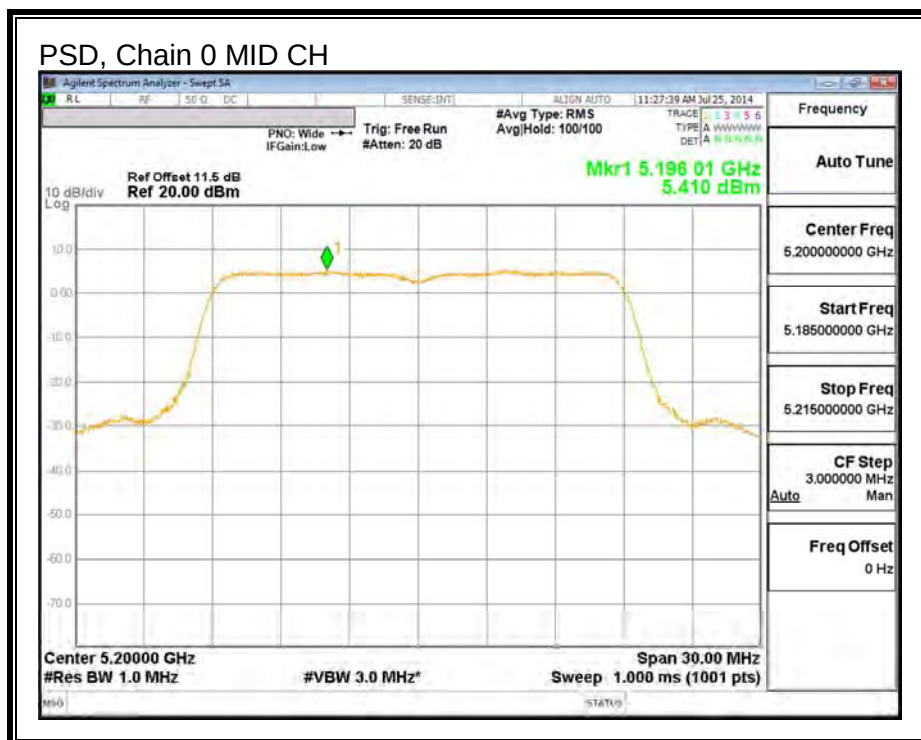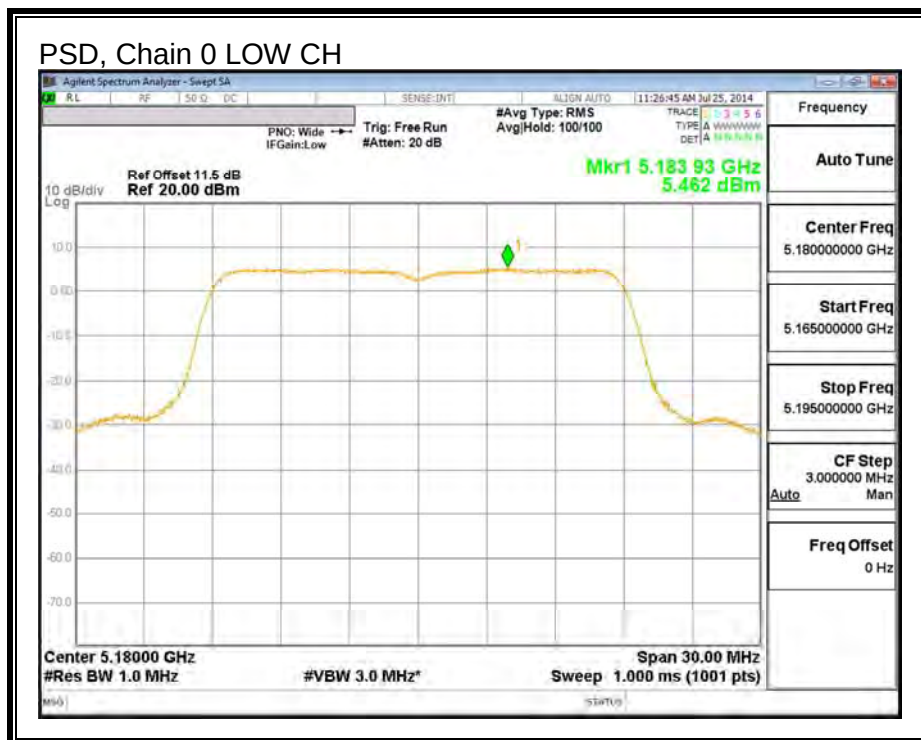




PSD, Chain 0 HIGH CH

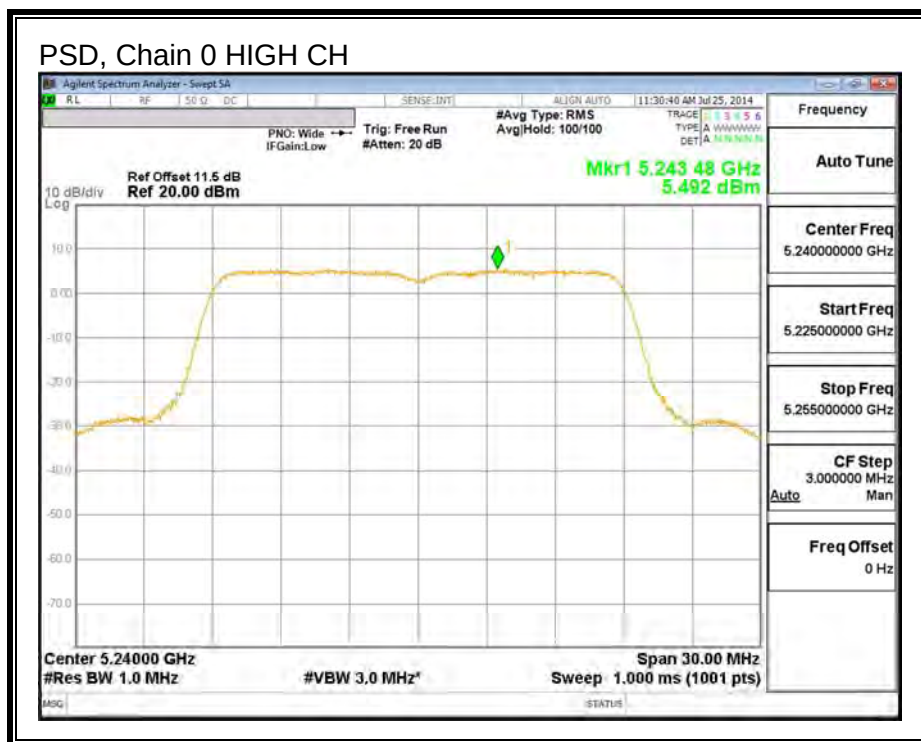

PSD, Chain 1

PSD, Chain 1 LOW CH

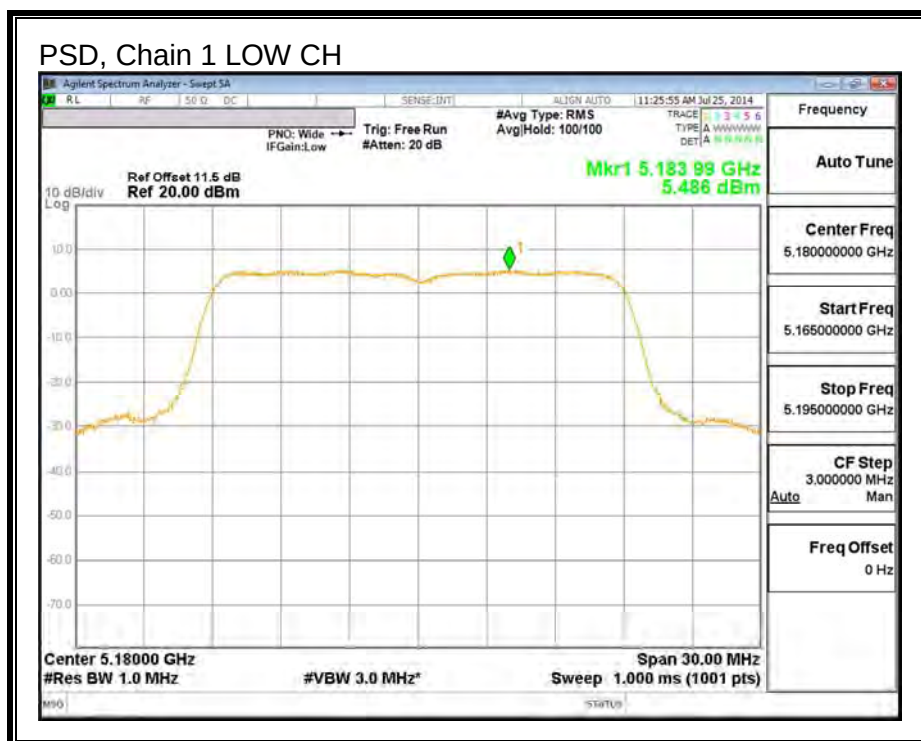

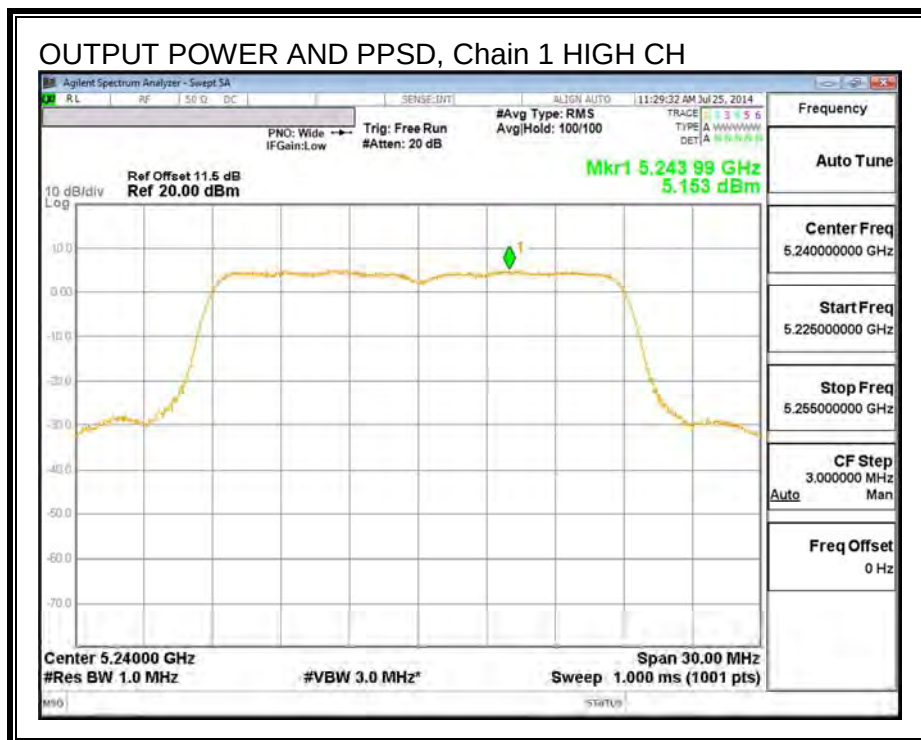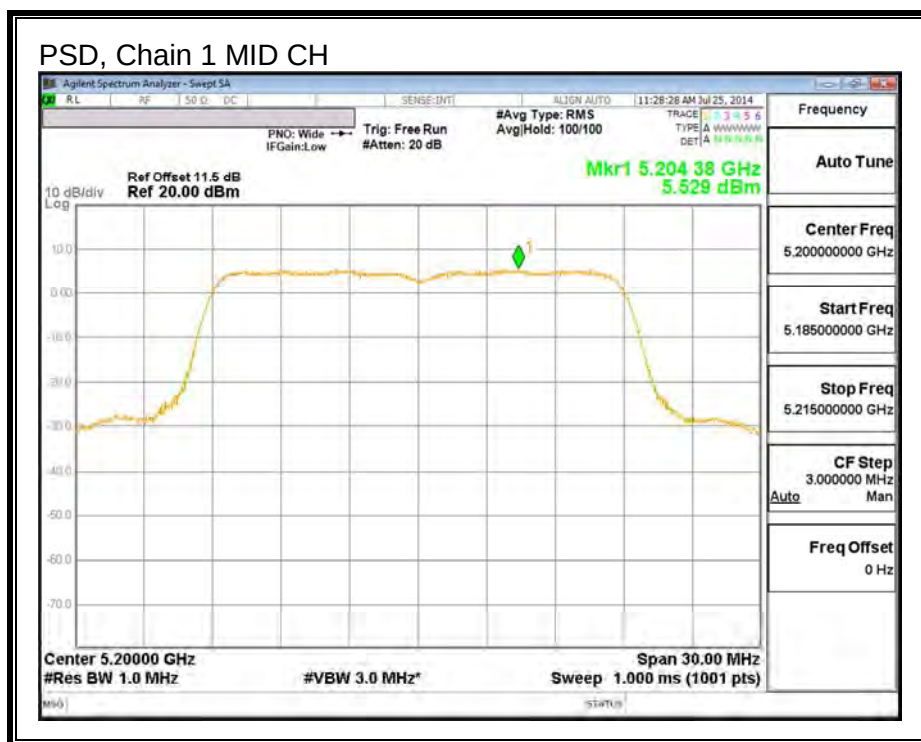

9.4. 802.11n HT40 1Tx MODE IN THE 5.2 GHz BAND

9.4.1. 26 dB BANDWIDTH



LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5190	40.0
High	5230	40.2

26 dB BANDWIDTH

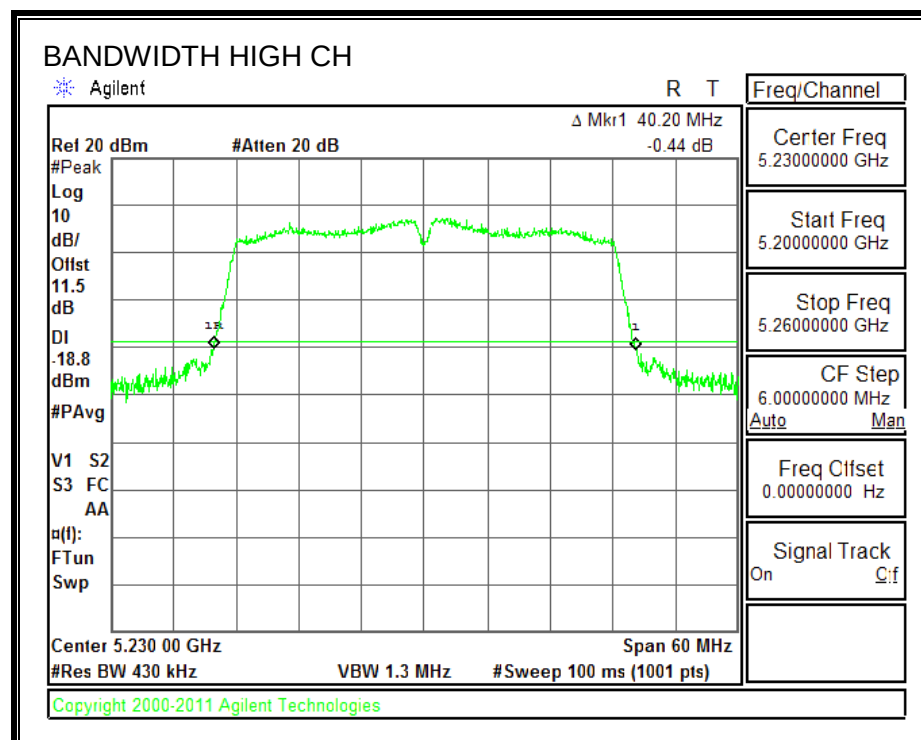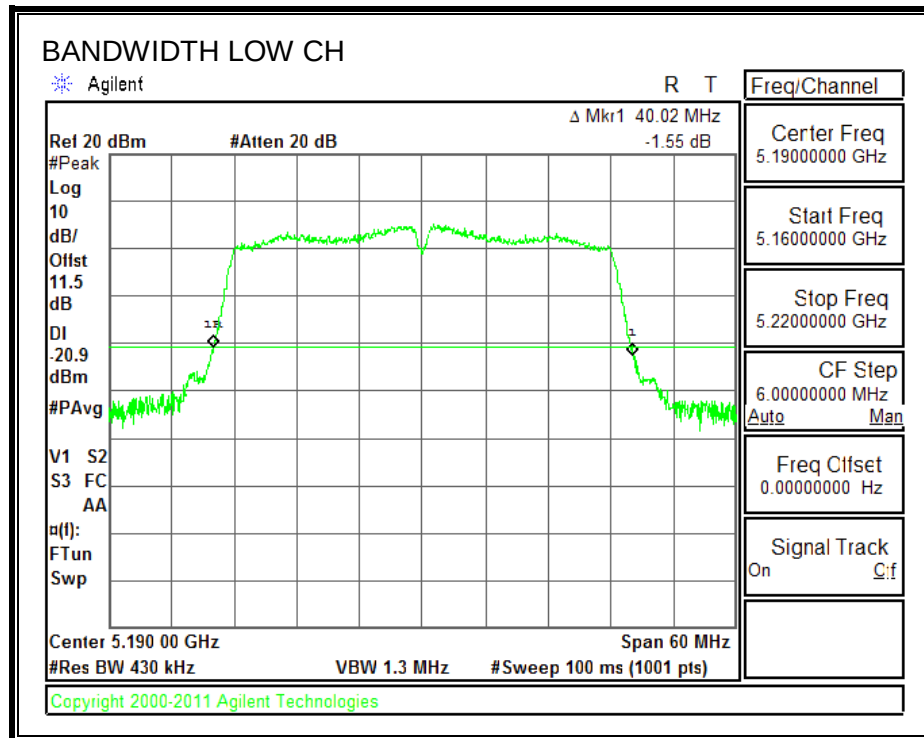

9.4.2. 99% BANDWIDTH



LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5190	36.1
High	5230	36.1

99% BANDWIDTH

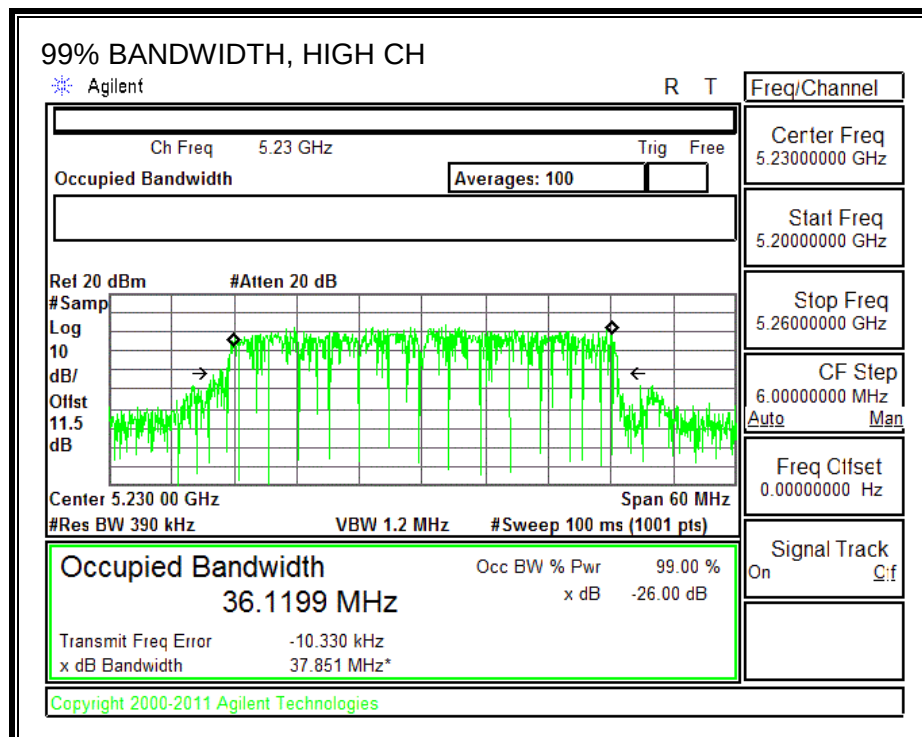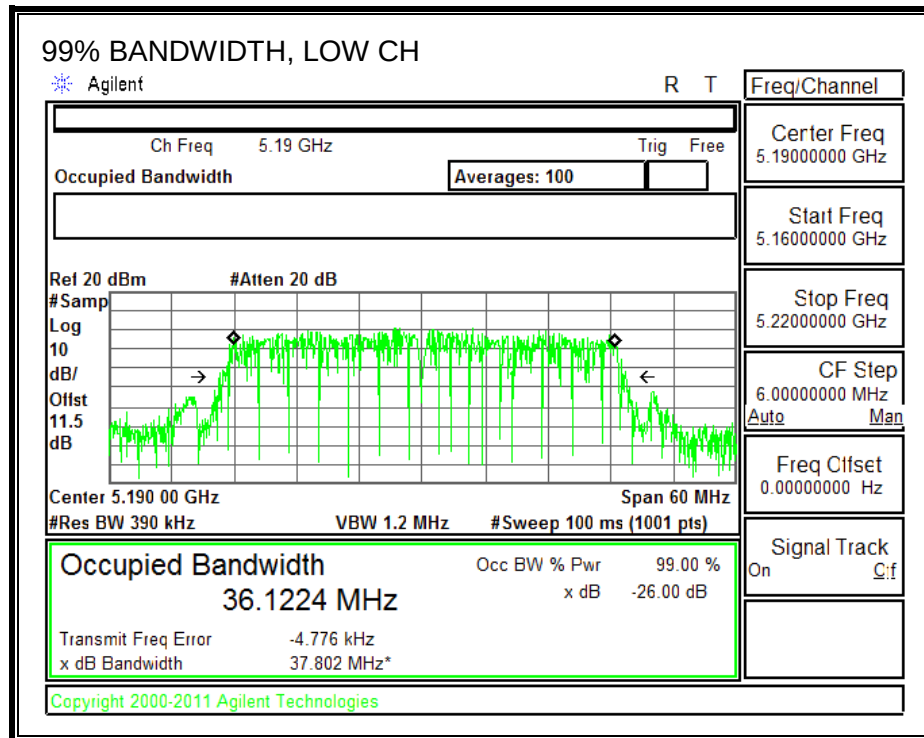

9.4.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter. The power meter was setup for a gated power measurement.

The cable assembly insertion loss of 11.5 dB (including 10 dB pad and 1.5 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

Channel	Frequency (MHz)	Power (dBm)
Low	5190	13.30
High	5230	15.76

9.4.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (1)

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

The transmitter output is connected to a power meter. The power meter was setup for a gated power measurement.

The cable assembly insertion loss of 11.5 dB (including 10 dB pad and 1.5 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

Antenna Gain (dBi)
3.06

RESULTS

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5190	3.06	3.06	24.00	11.00
High	5230	3.06	3.06	24.00	11.00

Duty Cycle CF (dB)	0.13	Included in Calculations of Corr'd Power & PSD
--------------------	------	--



Output Power Results

Channel	Frequency (MHz)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	13.30	13.43	24.00	-10.57
High	5230	15.76	15.89	24.00	-8.11

PSD Results

Channel	Frequency (MHz)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5190	0.84	0.97	11.00	-10.03
High	5230	2.62	2.75	11.00	-8.25

PSD, Chain 1

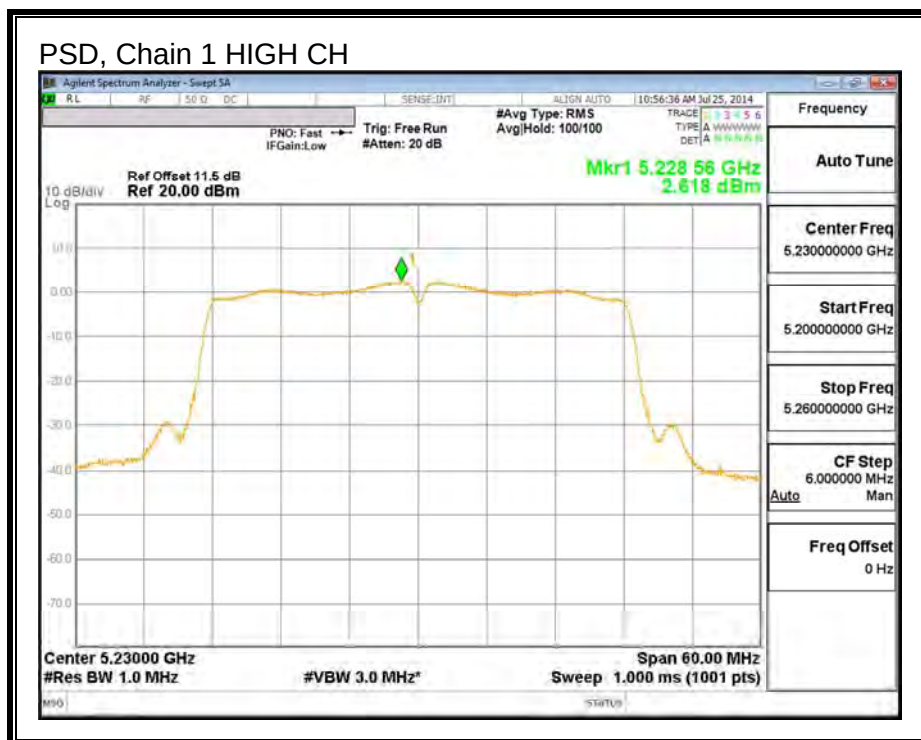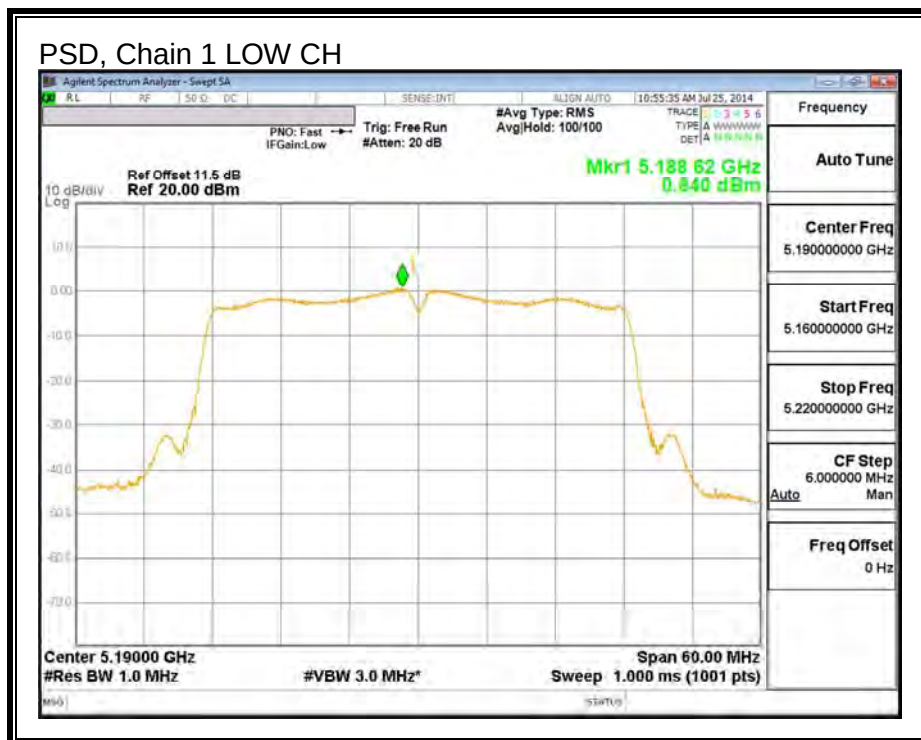

9.5. 802.11n HT40 2Tx CDD MODE IN THE 5.2 GHz BAND

9.5.1. 26 dB BANDWIDTH



LIMITS

None; for reporting purposes only.



RESULTS

Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)
Low	5190	40.1	39.6
High	5230	40.3	39.7

26 dB BANDWIDTH, Chain 0

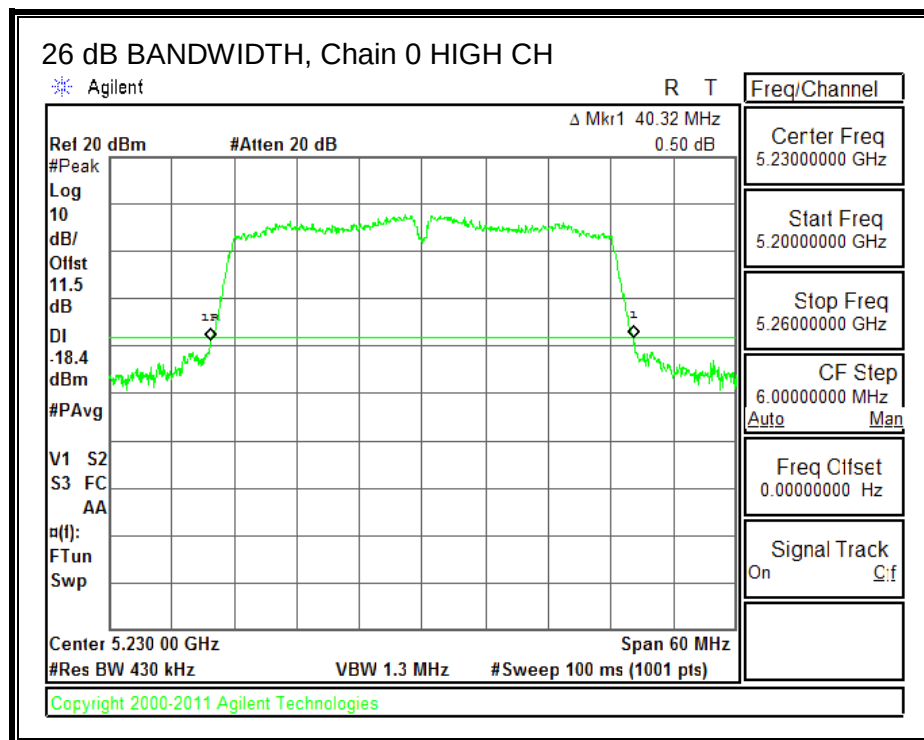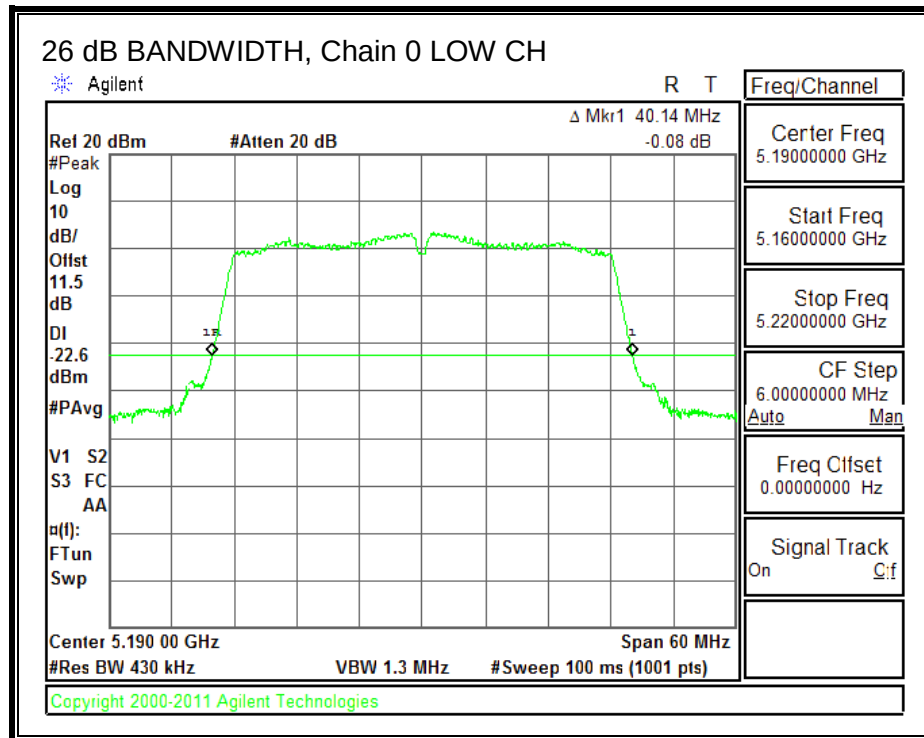

26 dB BANDWIDTH, Chain 1

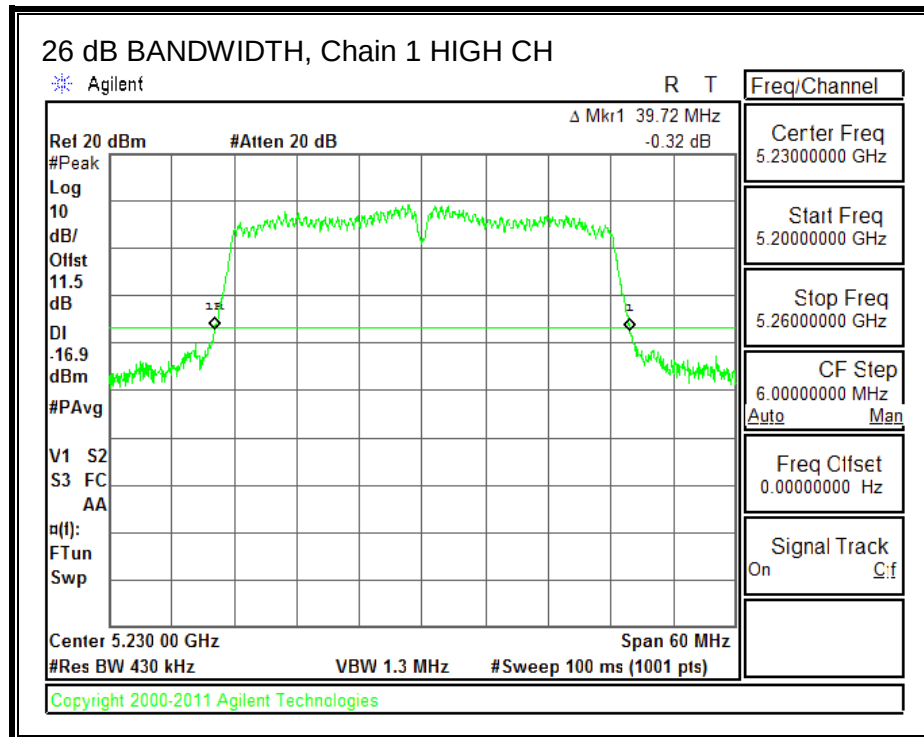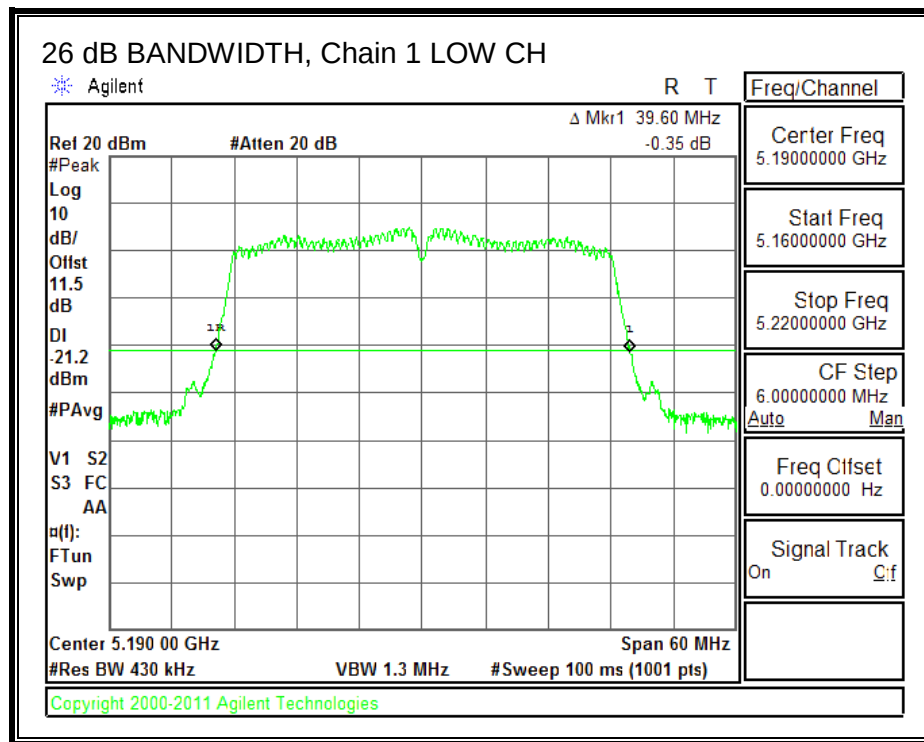

9.5.2. 99% BANDWIDTH



LIMITS

None; for reporting purposes only.



RESULTS

Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)
Low	5190	36.4	36.3
High	5230	36.4	36.4

99% BANDWIDTH, Chain 0

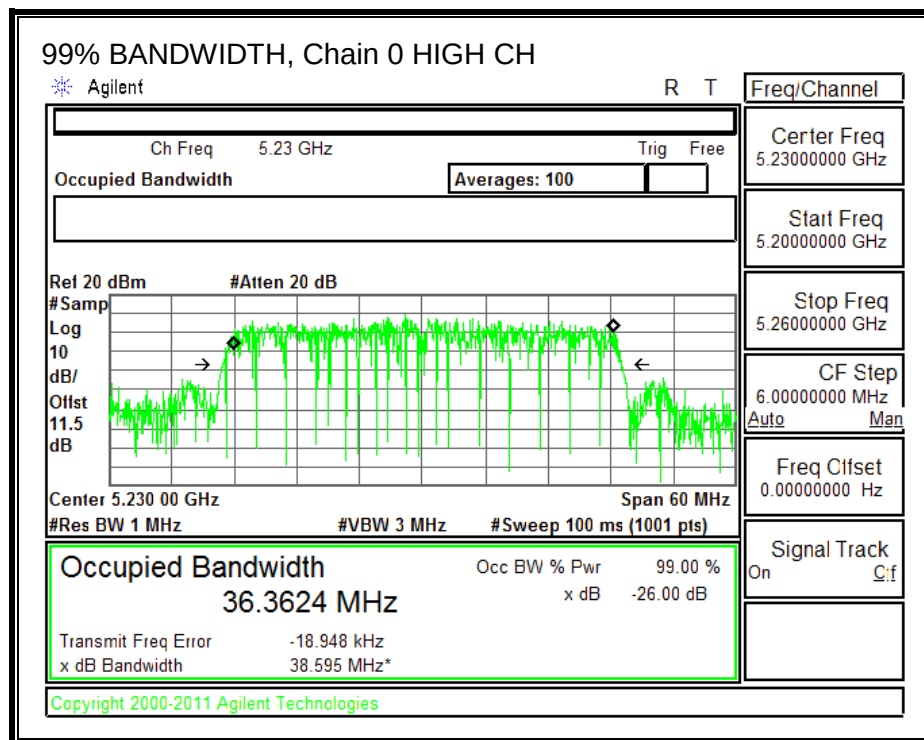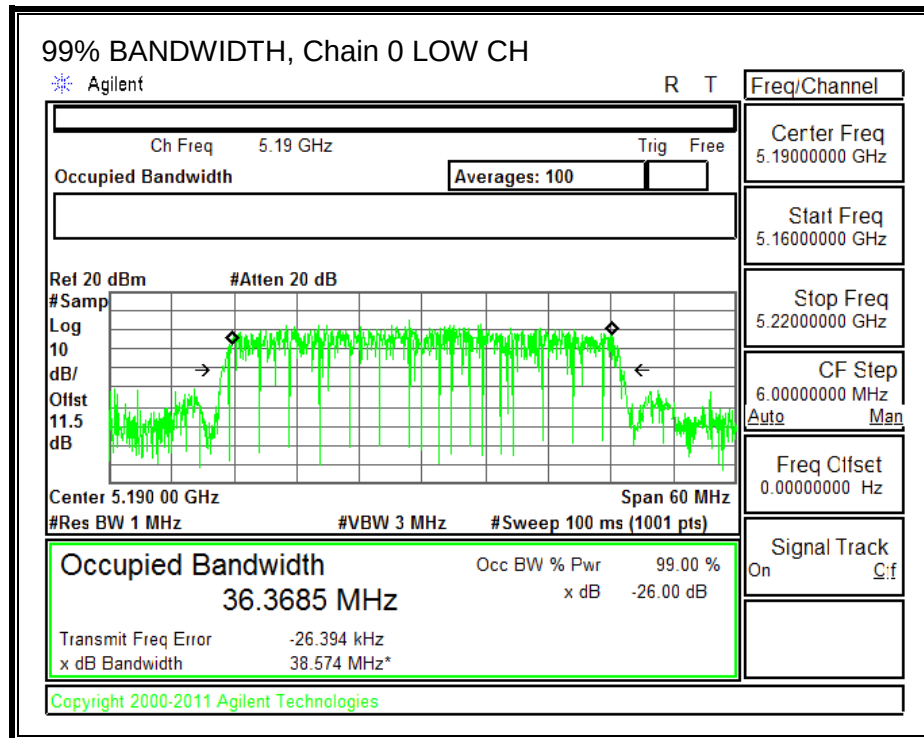

99% BANDWIDTH, Chain 1

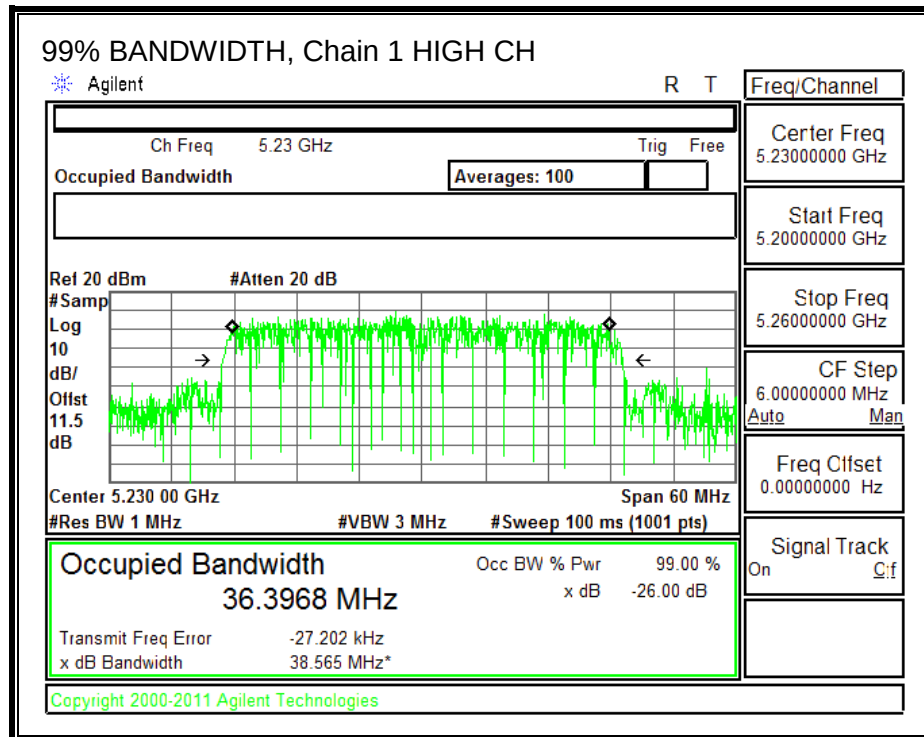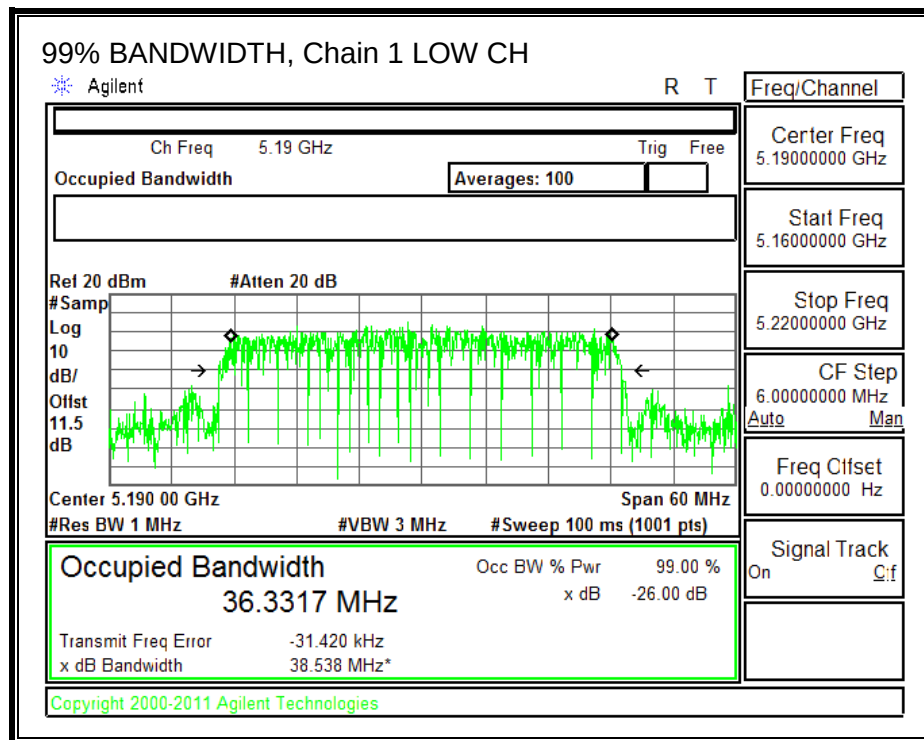

9.5.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter. The power meter was setup for a gated power measurement.

The cable assembly insertion loss of 11.5 dB (including 10 dB pad and 1.5 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

Average Power Results

Channel	Frequency (MHz)	Chain 0 Power (dBm)	Chain 1 Power (dBm)	Total Power (dBm)
Low	5190	11.42	11.37	14.41
High	5230	15.90	15.79	18.86

9.5.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (1)

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

The transmitter output is connected to a power meter. The power meter was setup for a gated power measurement.

The cable assembly insertion loss of 11.5 dB (including 10 dB pad and 1.5 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
-0.02	3.06	1.79

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Correlated Chains Directional Gain (dBi)
-0.02	3.06	4.67

RESULTS

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5190	1.79	4.67	24.00	11.00
High	5230	1.79	4.67	24.00	11.00

Duty Cycle CF (dB)	0.13	Included in Calculations of Corr'd Power & PSD
--------------------	------	--



Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	11.42	11.37	14.54	24.00	-9.46
High	5230	15.90	15.79	18.99	24.00	-5.01



PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5190	-1.28	-1.10	1.95	11.00	-9.05
High	5230	2.25	2.68	5.61	11.00	-5.39

PSD, Chain 0

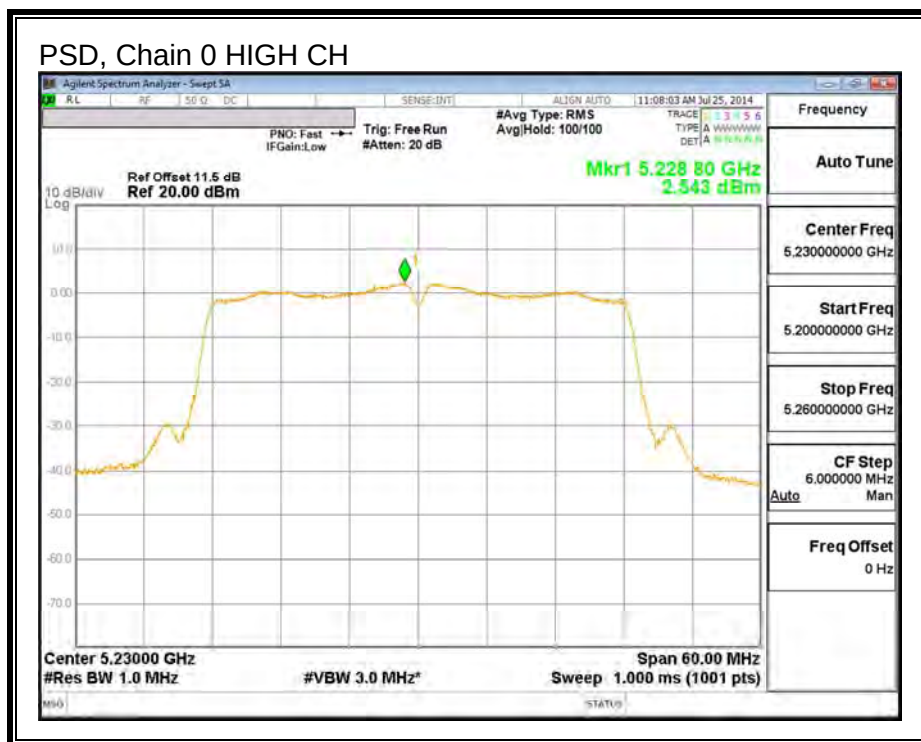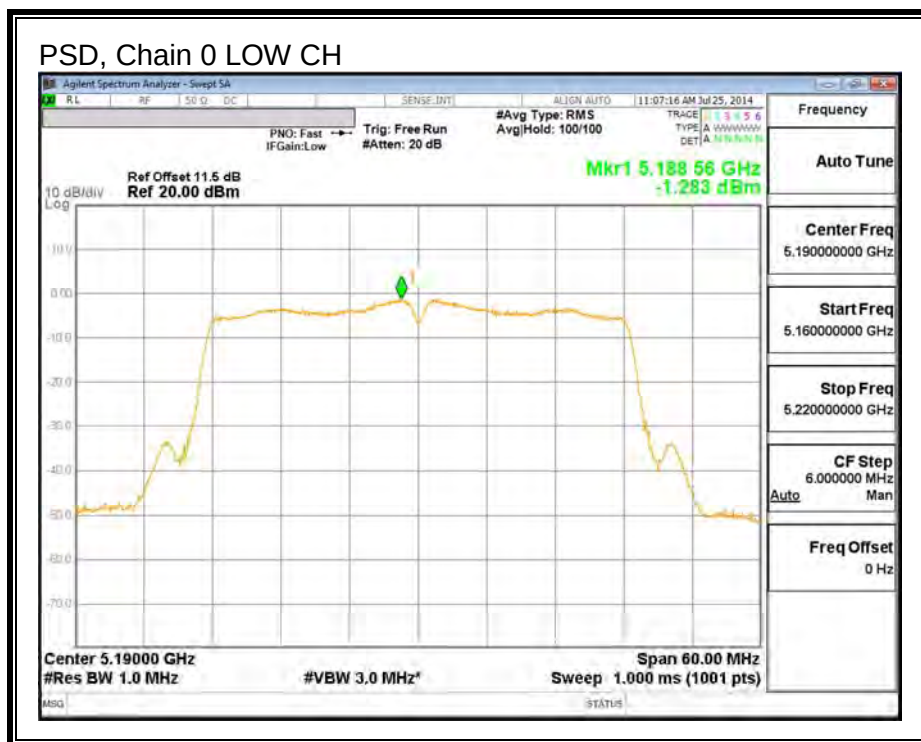

PSD, Chain 1

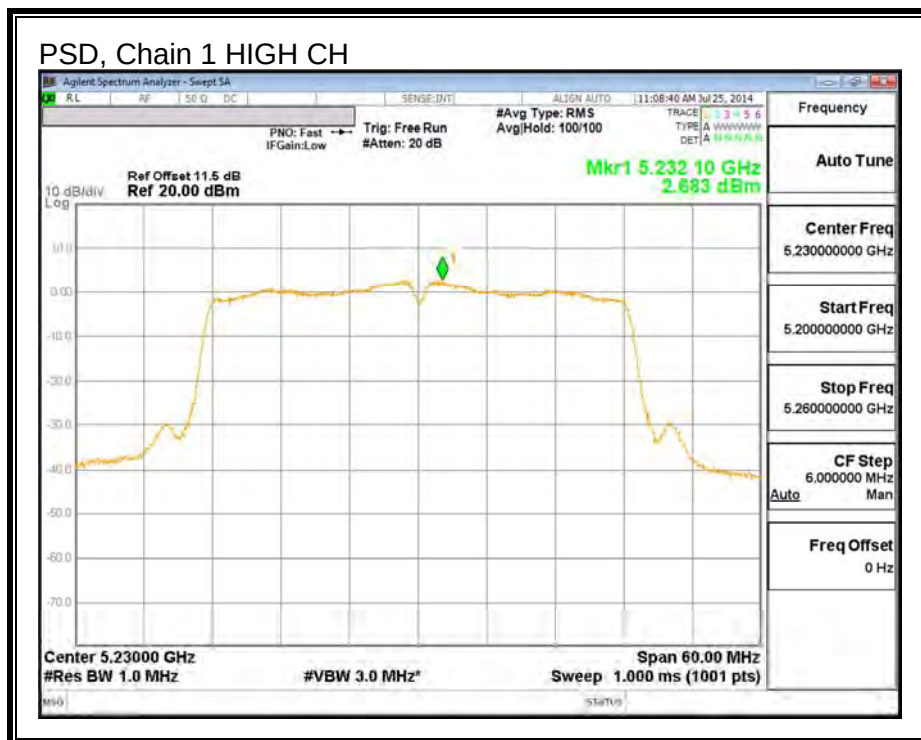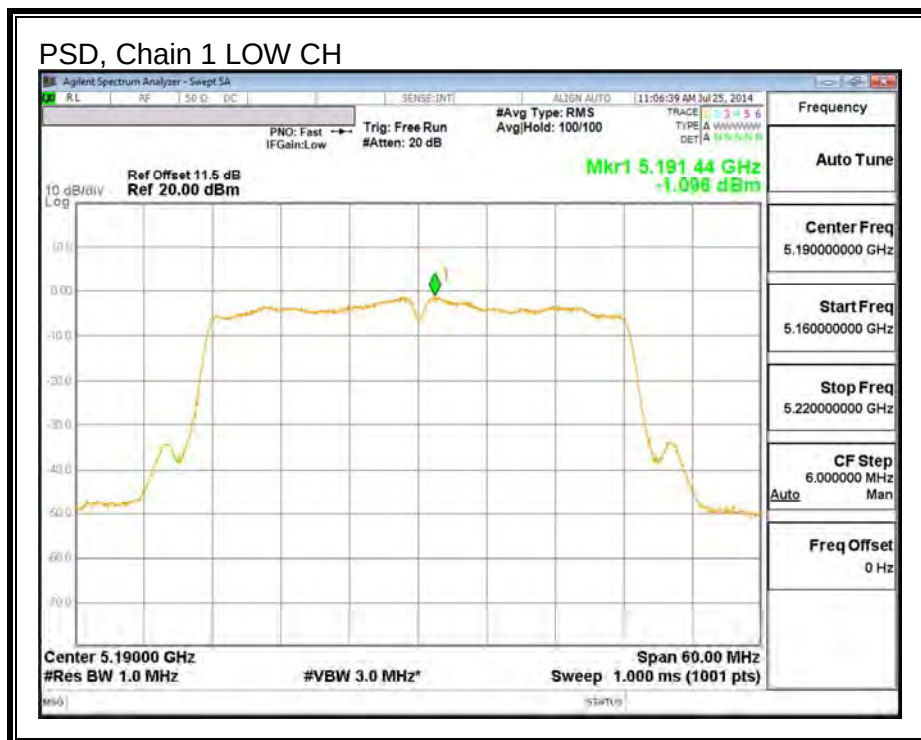

9.6. 802.11a 1Tx MODE IN THE 5.3 GHz BAND

9.6.1. 26 dB BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5260	20.13
Mid	5300	20.31
High	5320	20.37

26 dB BANDWIDTH

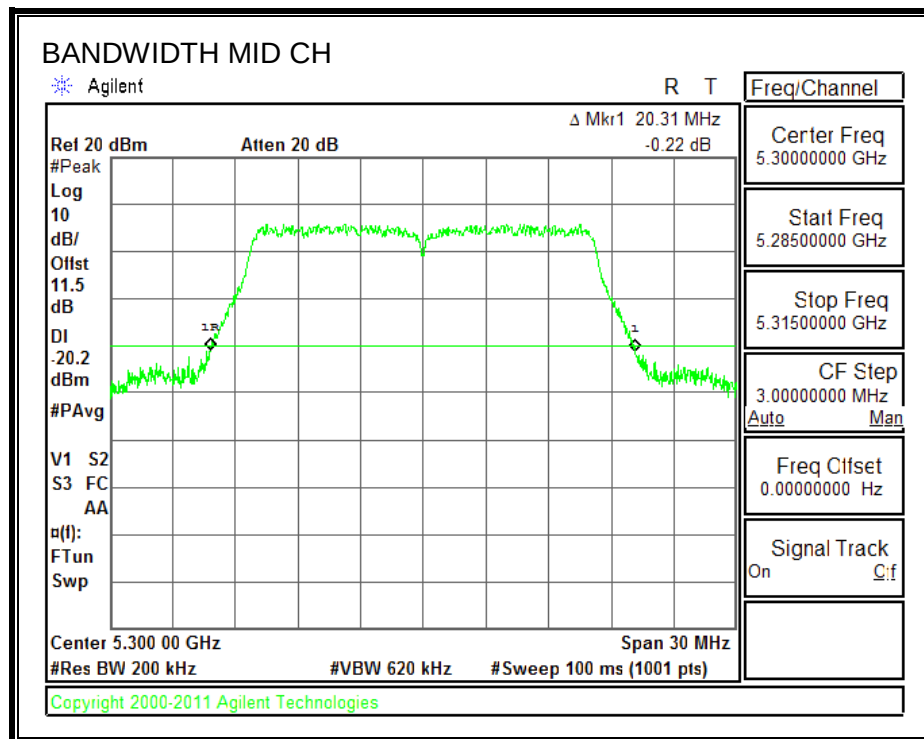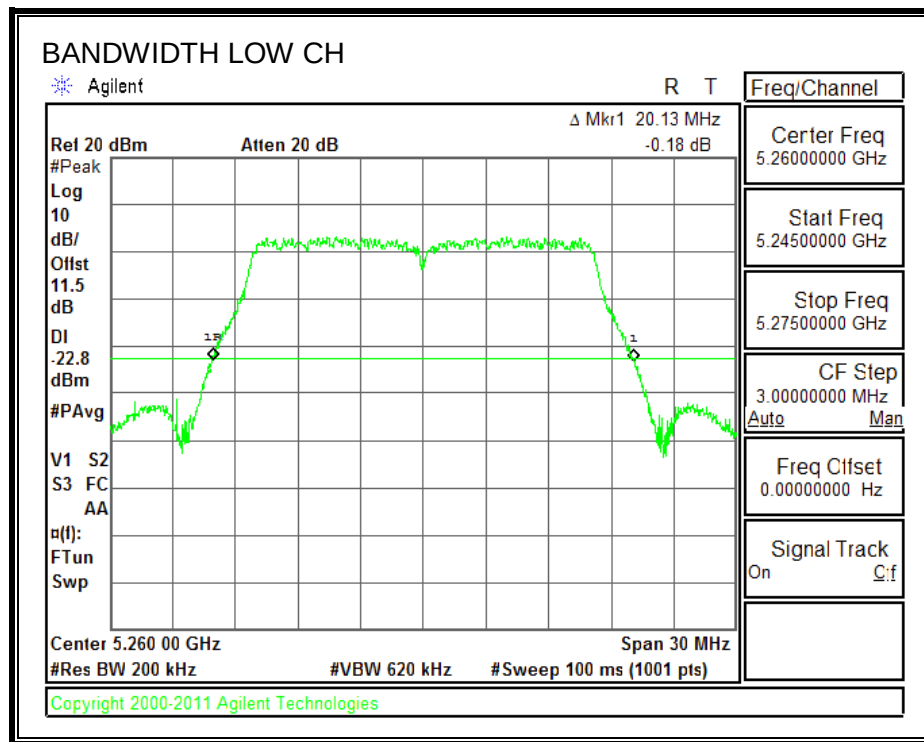

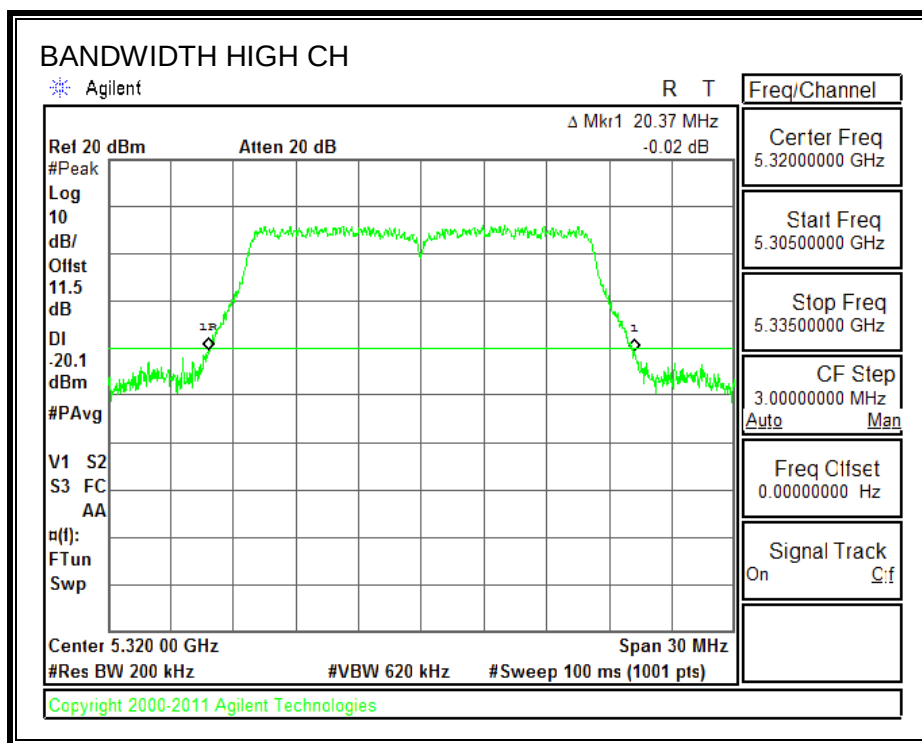

9.6.2. 99% BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5260	16.47
Mid	5300	16.48
High	5320	16.48

99% BANDWIDTH

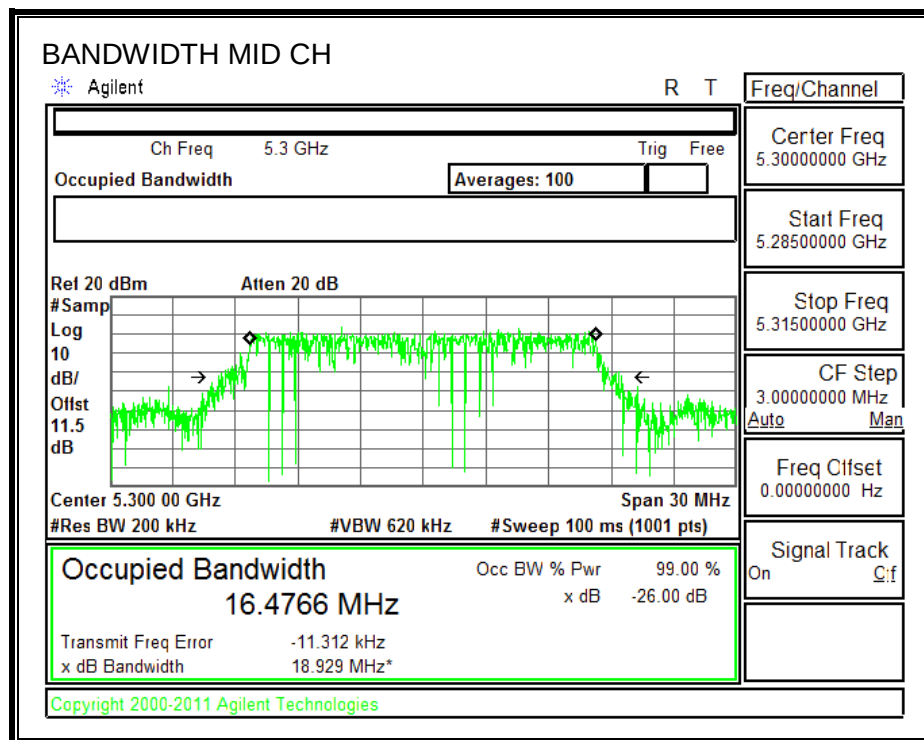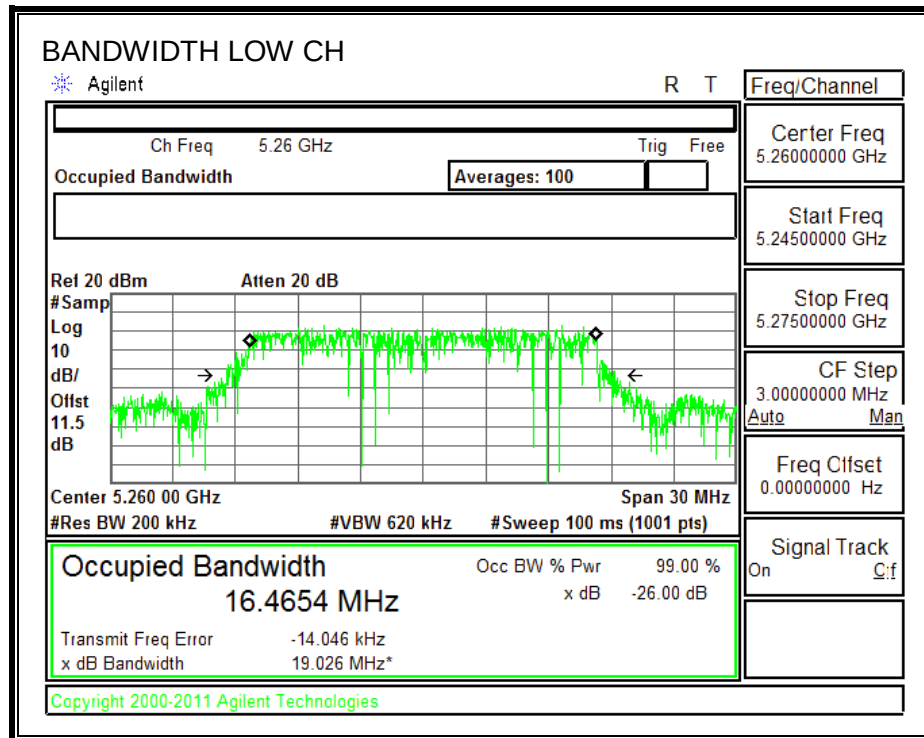

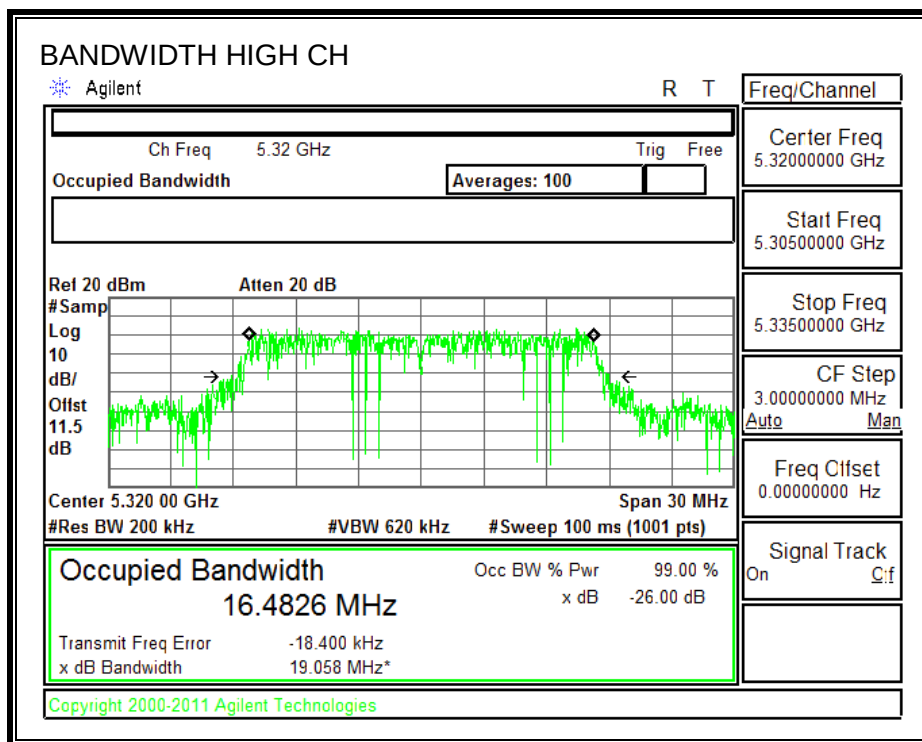

9.6.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter. The power meter was setup for a gated power measurement.

The cable assembly insertion loss of 11.5 dB (including 10 dB pad and 1.5 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

Channel	Frequency (MHz)	Power (dBm)
Low	5260	15.77
Mid	5300	15.80
High	5320	14.81

9.6.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26–dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

The transmitter output is connected to a power meter. The power meter was setup for a gated power measurement.

The cable assembly insertion loss of 11.5 dB (including 10 dB pad and 1.5 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

Antenna Gain (dBi)
3.25

RESULTS

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5260	20.1	3.25	24.00	11.00
Mid	5300	20.3	3.25	24.00	11.00
High	5320	20.4	3.25	24.00	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--



Output Power Results


Channel	Frequency (MHz)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	15.77	15.77	24.00	-8.23
Mid	5300	15.80	15.80	24.00	-8.20
High	5320	14.81	14.81	24.00	-9.19

PSD Results

Channel	Frequency (MHz)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5260	4.39	4.39	11.00	-6.61
Mid	5300	4.67	4.67	11.00	-6.33
High	5320	3.54	3.54	11.00	-7.46

PSD, Chain 1

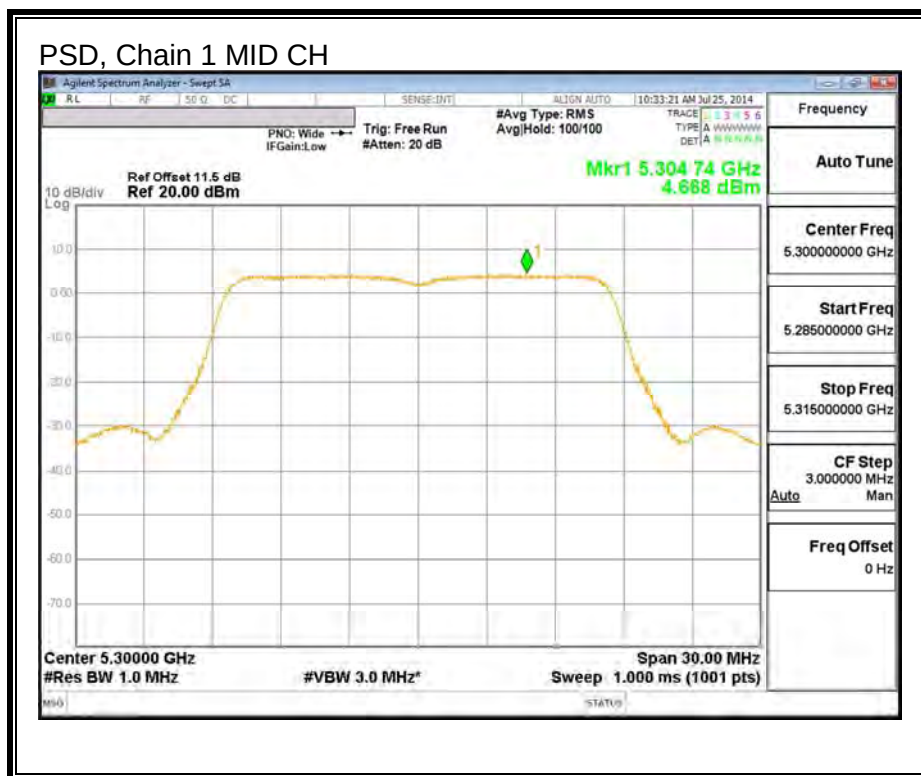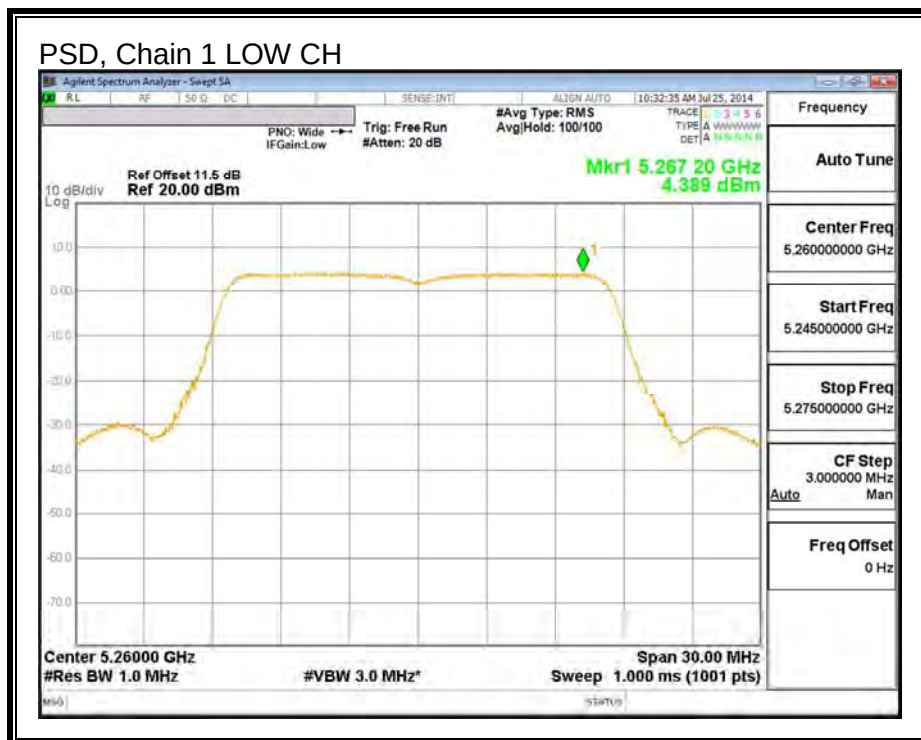

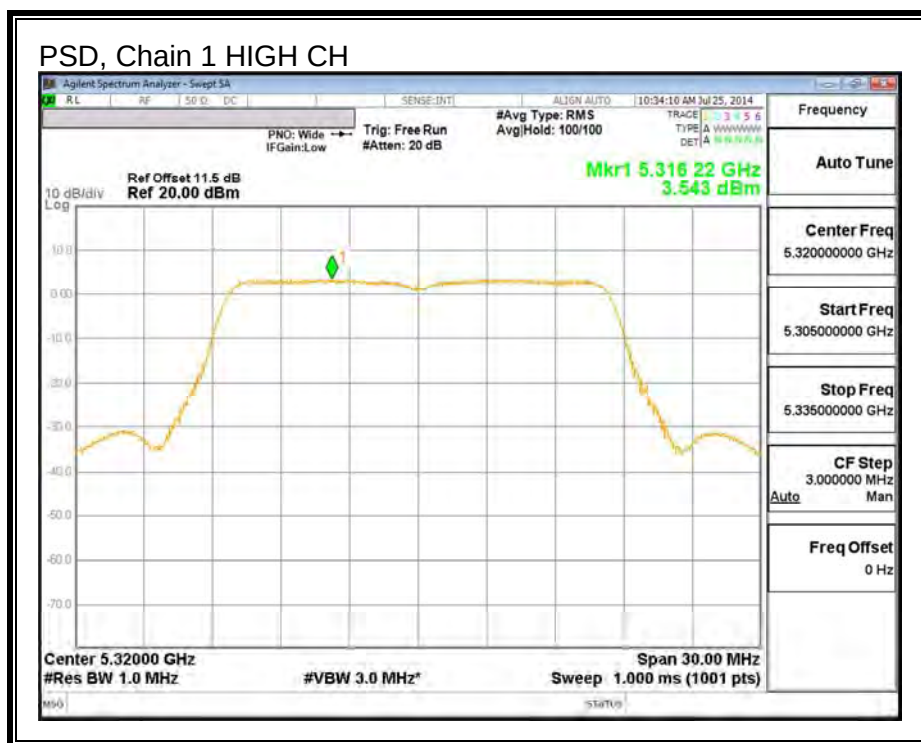

9.7. 802.11n HT20 1Tx MODE IN THE 5.3 GHz BAND

9.7.1. 26 dB BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5260	20.61
Mid	5300	20.73
High	5320	20.55

26 dB BANDWIDTH

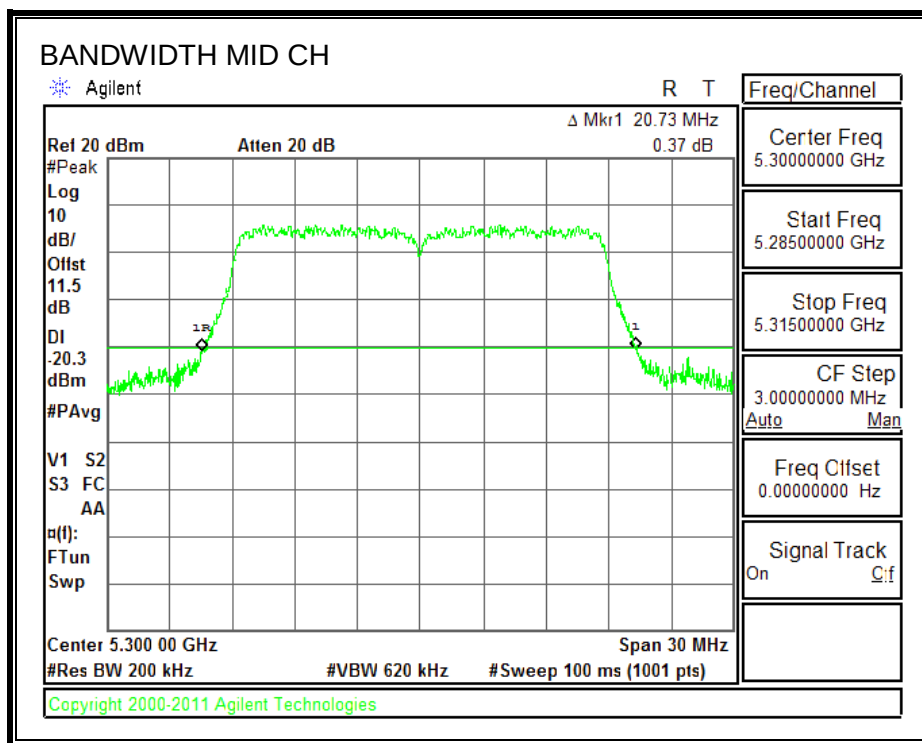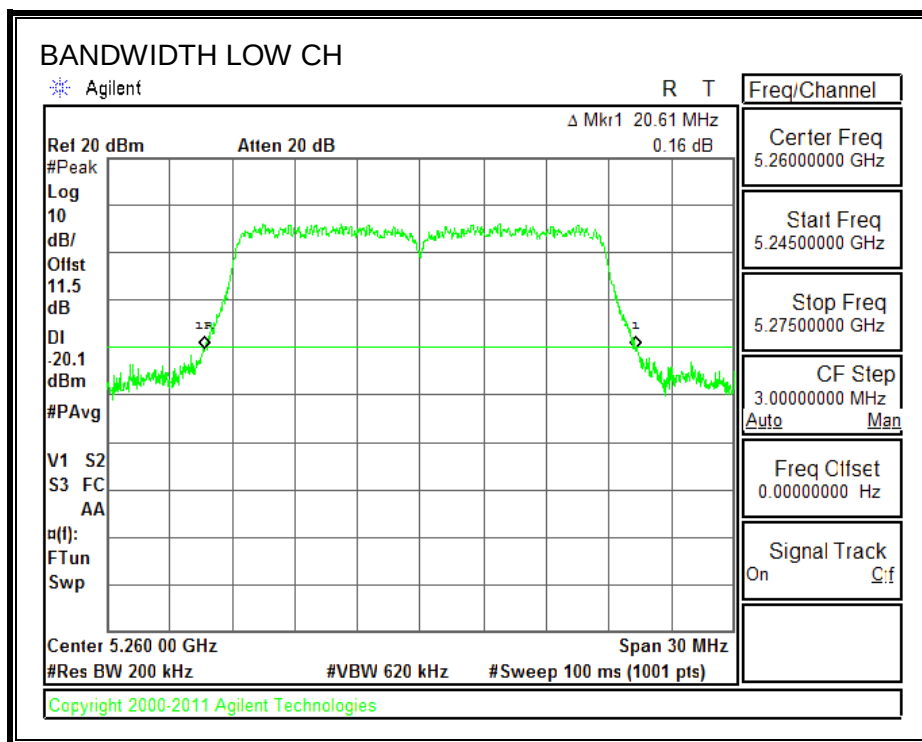

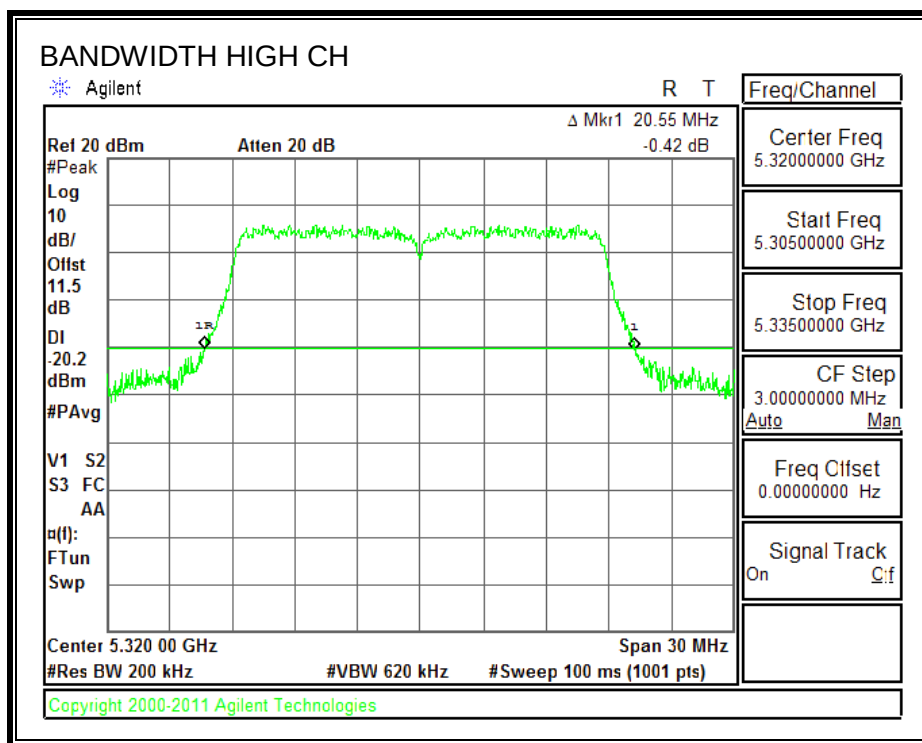

9.7.2. 99% BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5260	17.61
Mid	5300	17.61
High	5320	17.62

99% BANDWIDTH

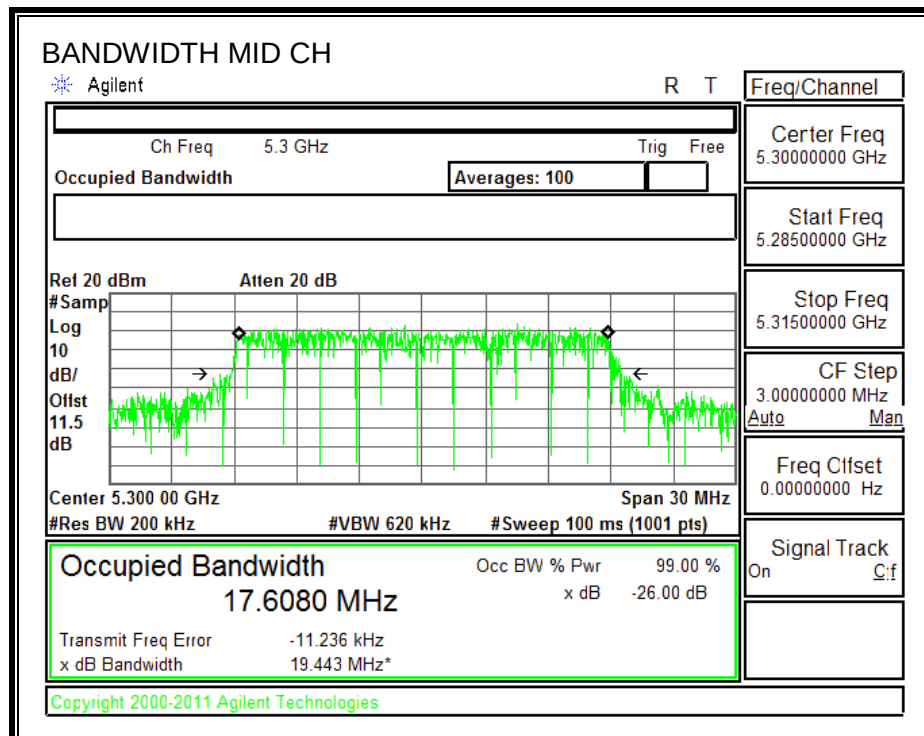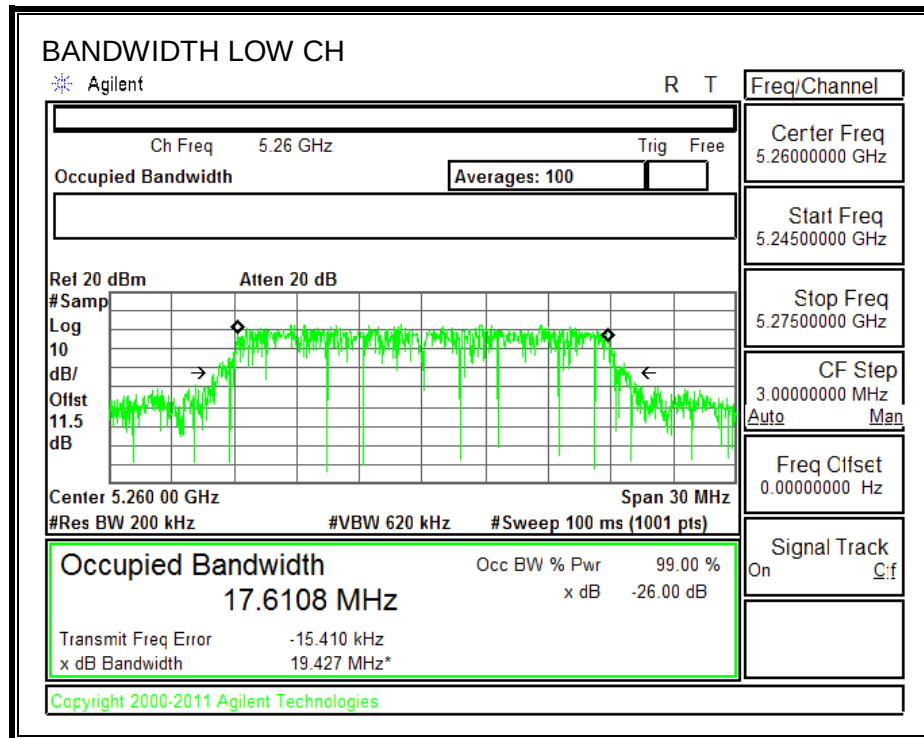

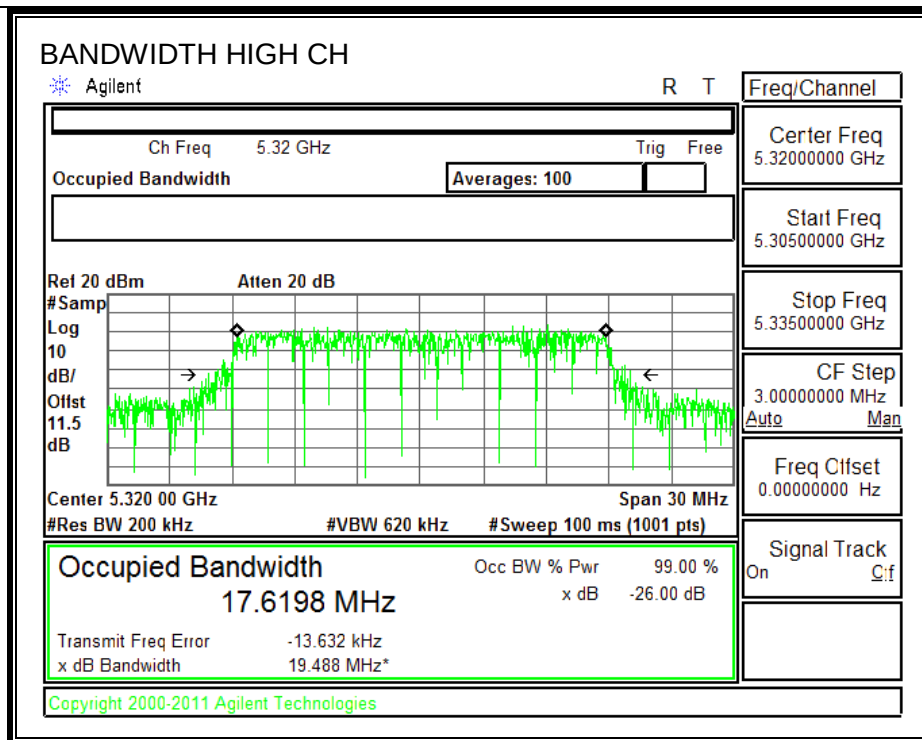

9.7.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter. The power meter was setup for a gated power measurement.

The cable assembly insertion loss of 11.5 dB (including 10 dB pad and 1.5 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

Channel	Frequency (MHz)	Power (dBm)
Low	5260	15.78
Mid	5300	15.92
High	5320	14.86

9.7.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26–dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

The transmitter output is connected to a power meter. The power meter was setup for a gated power measurement.

The cable assembly insertion loss of 11.5 dB (including 10 dB pad and 1.5 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

Antenna Gain (dBi)
3.25

RESULTS

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5260	20.6	3.25	24.00	11.00
Mid	5300	20.7	3.25	24.00	11.00
High	5320	20.6	3.25	24.00	11.00



Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--


Output Power Results

Channel	Frequency (MHz)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	15.78	15.78	24.00	-8.22
Mid	5300	15.92	15.92	24.00	-8.08
High	5320	14.86	14.86	24.00	-9.14

PSD Results

Channel	Frequency (MHz)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5260	4.26	4.26	11.00	-6.74
Mid	5300	4.50	4.50	11.00	-6.50
High	5320	3.27	3.27	11.00	-7.73

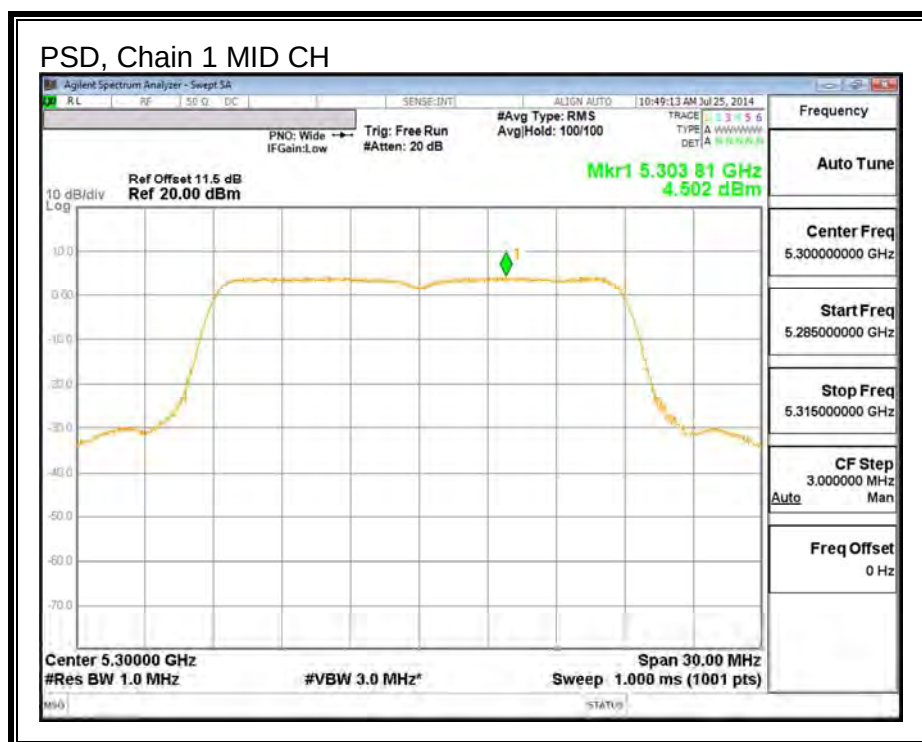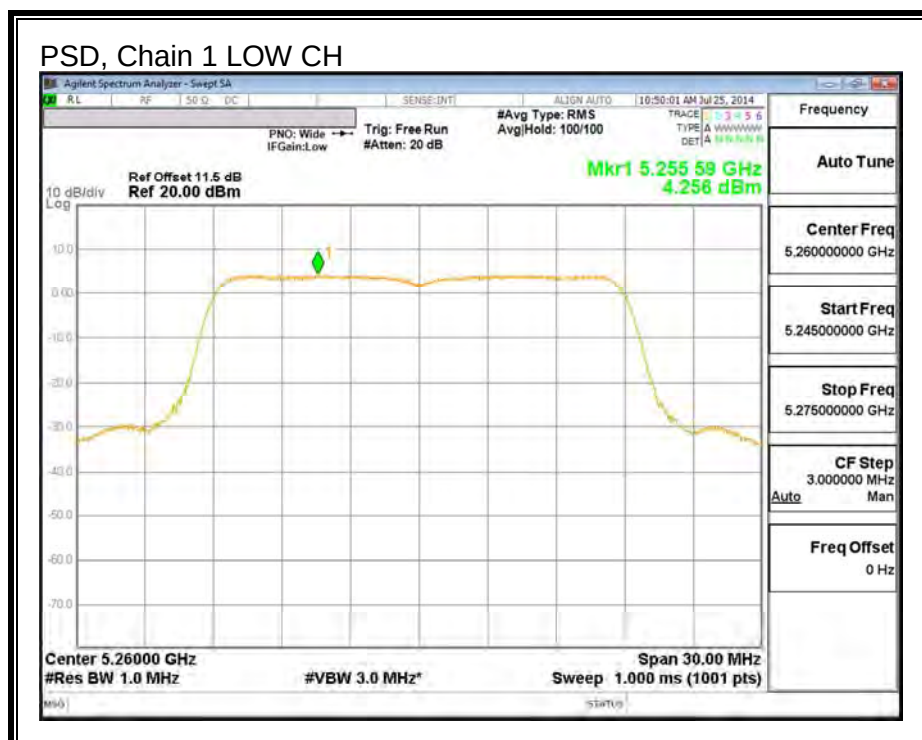PSD, Chain 1

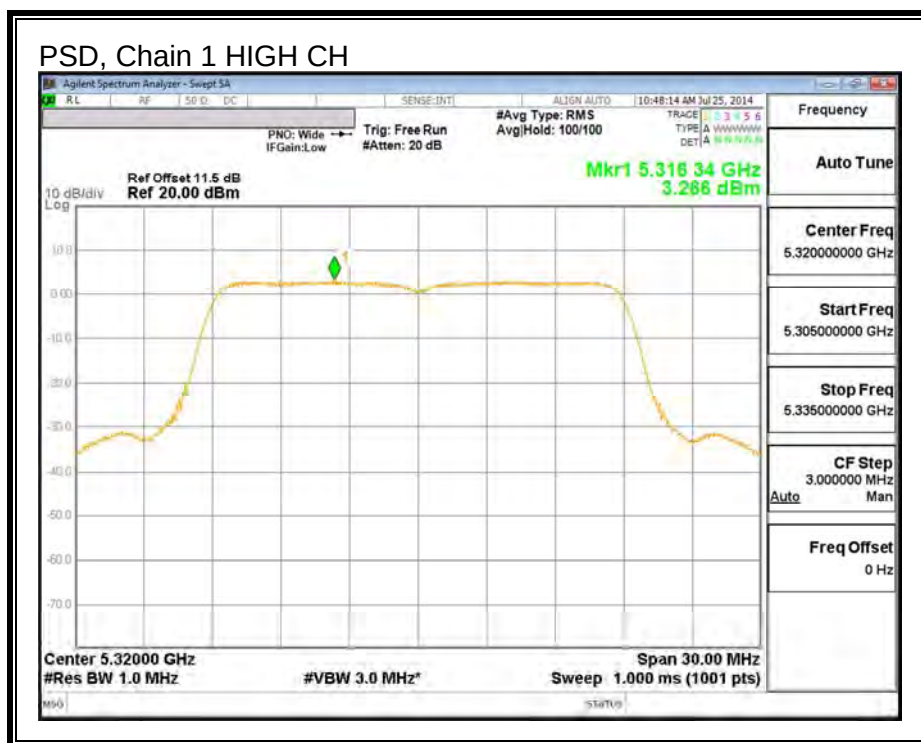

9.8. 802.11n HT20 2Tx CDD MODE IN THE 5.3 GHz BAND

9.8.1. 26 dB BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS


Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)
Low	5260	20.7	20.6
Mid	5300	20.6	20.6
High	5320	20.7	20.6



26 dB BANDWIDTH, Chain 0

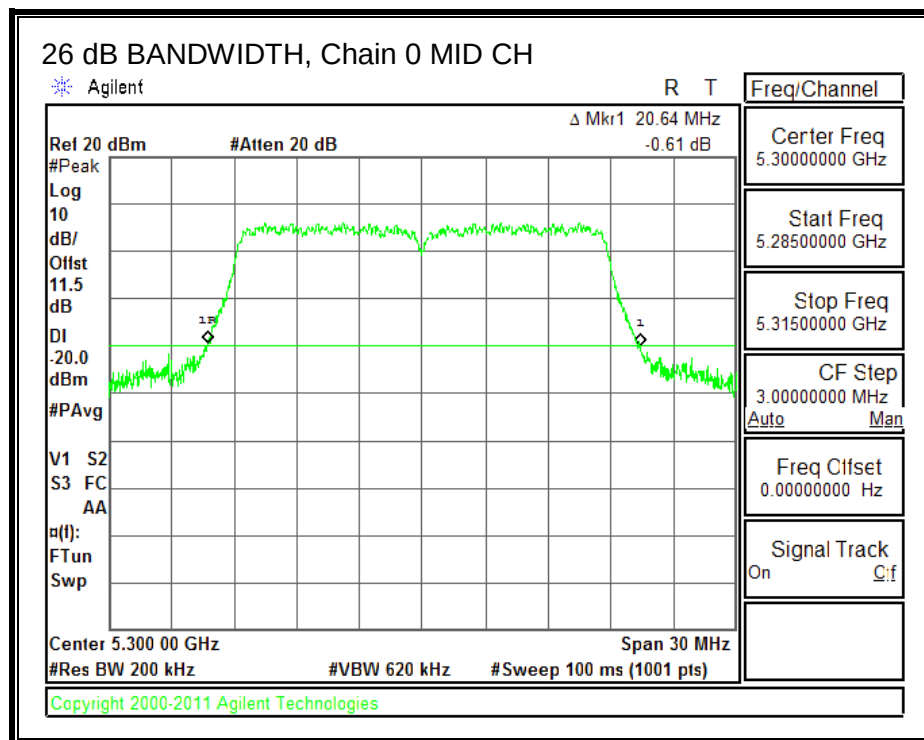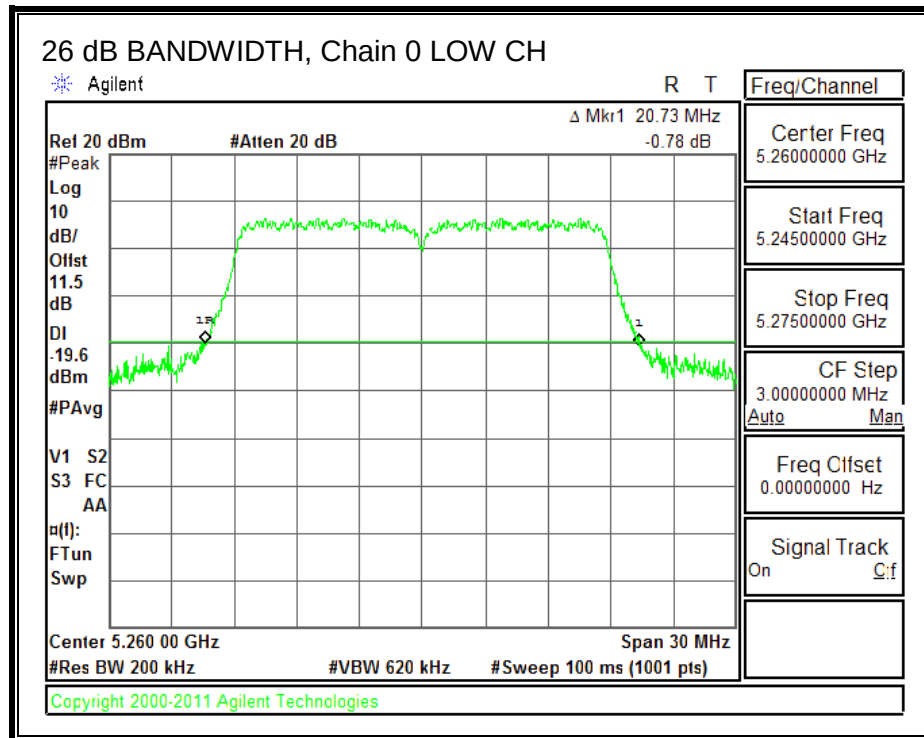

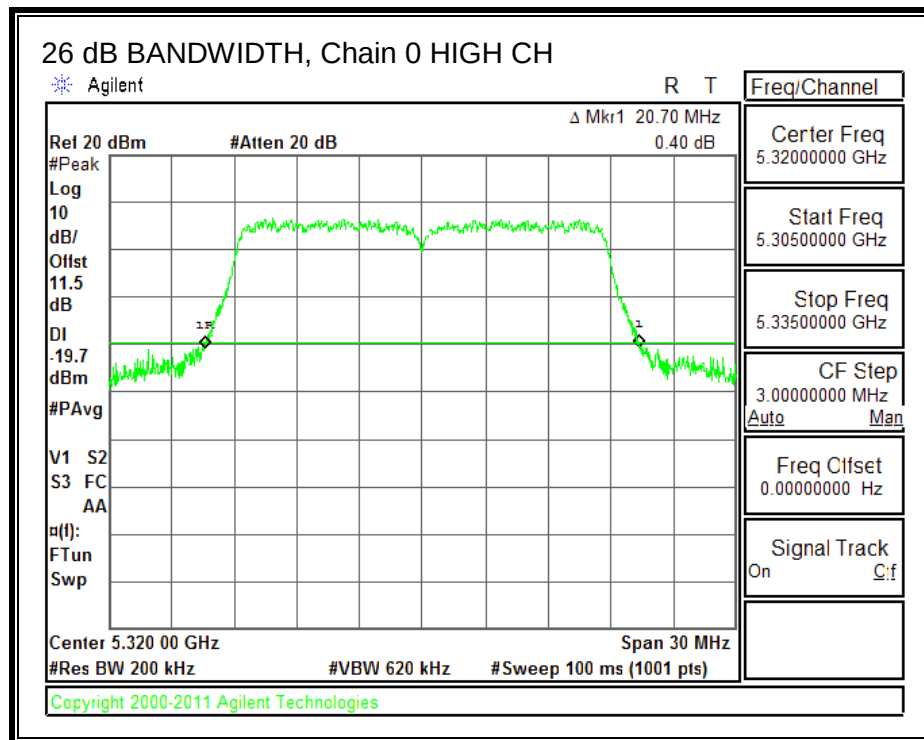

26 dB BANDWIDTH, Chain 1

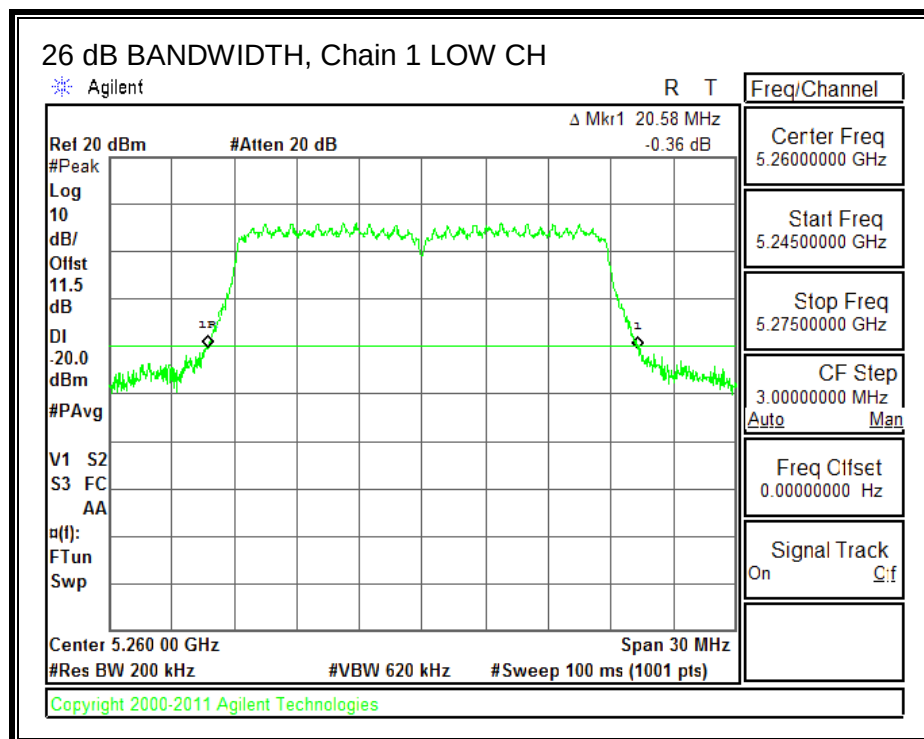

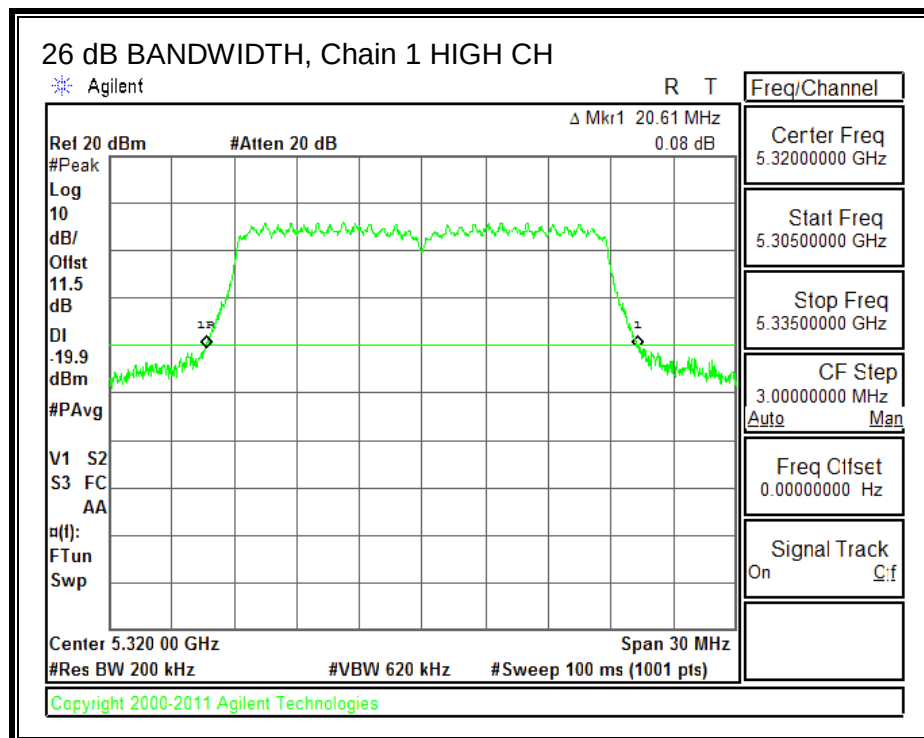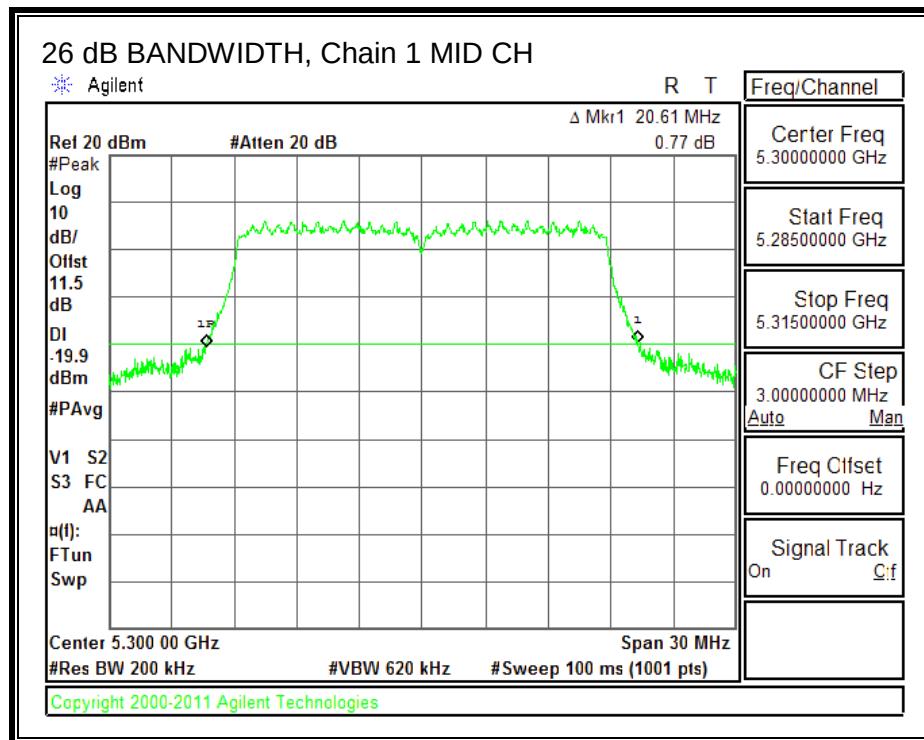

9.8.2. 99% BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS


Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)
Low	5260	17.6	17.6
Mid	5300	17.6	17.6
High	5320	17.6	17.6



99% BANDWIDTH, Chain 0

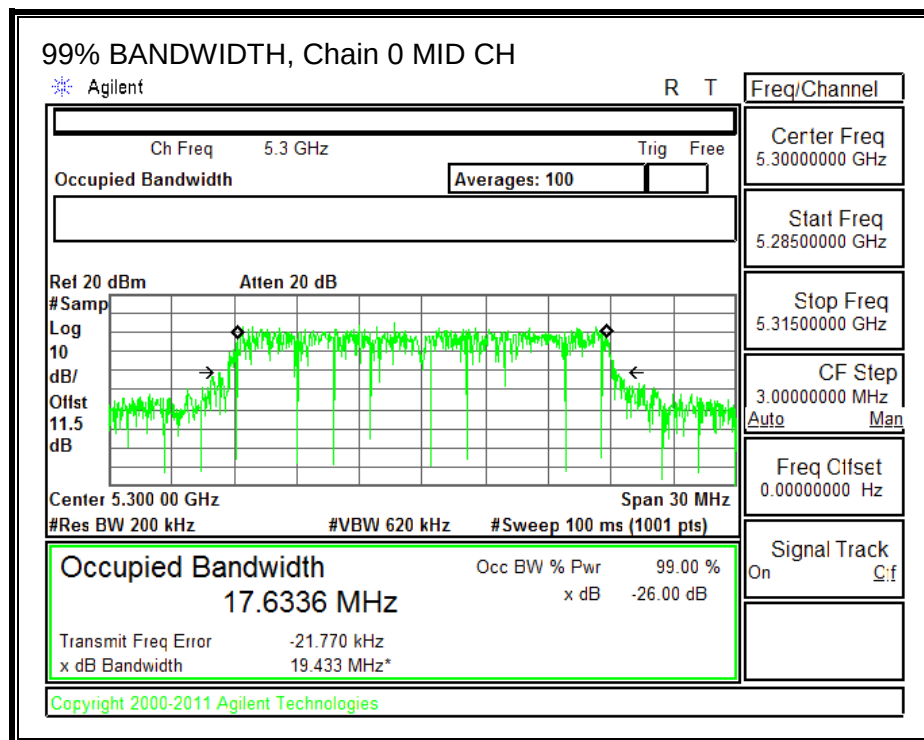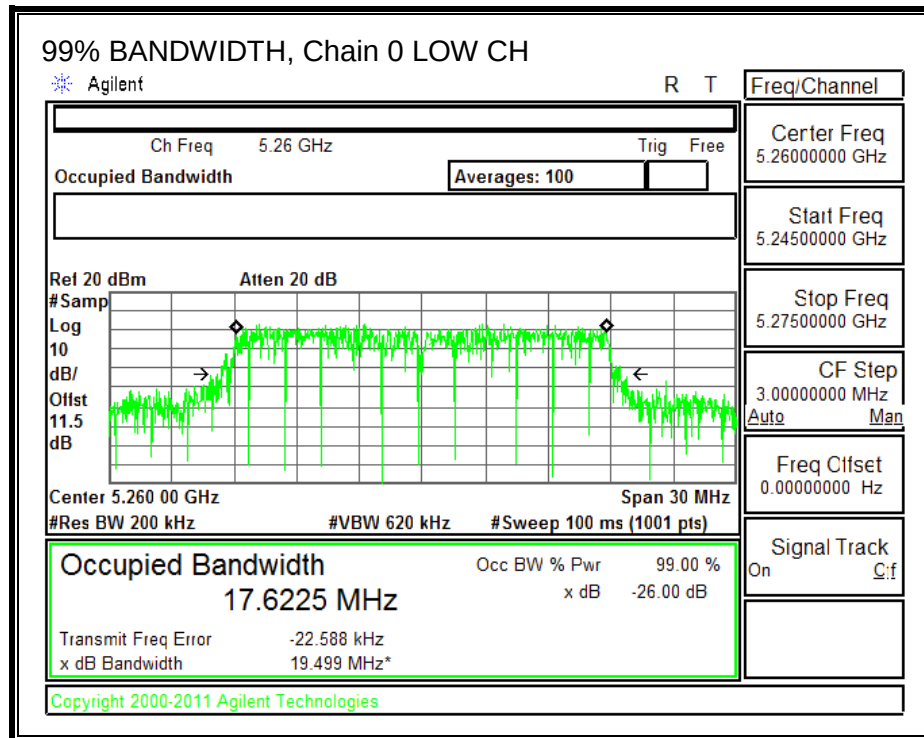

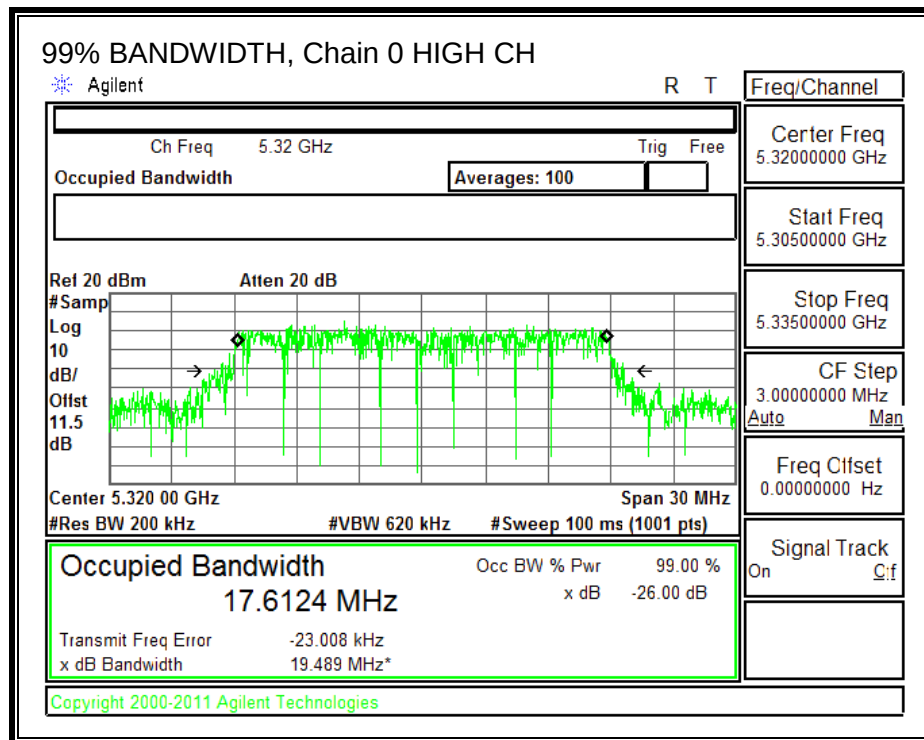

99% BANDWIDTH, Chain 1

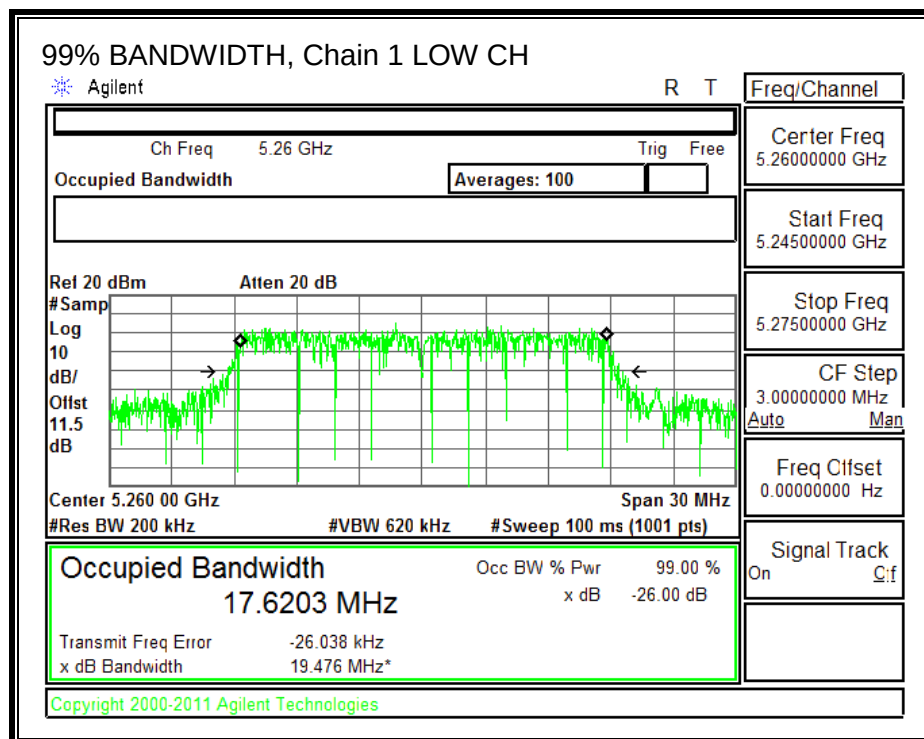

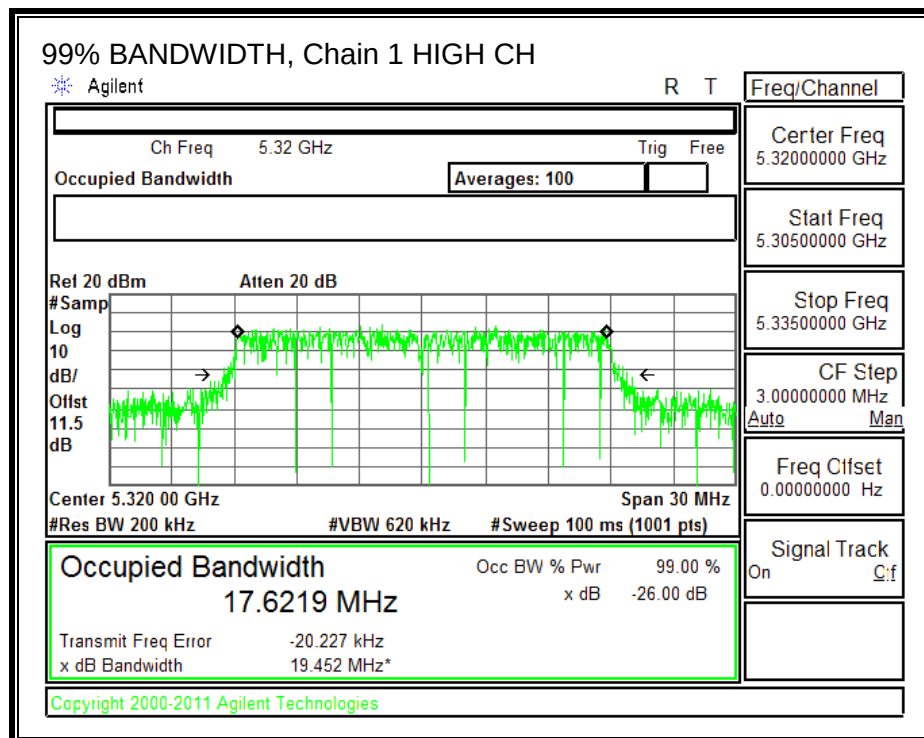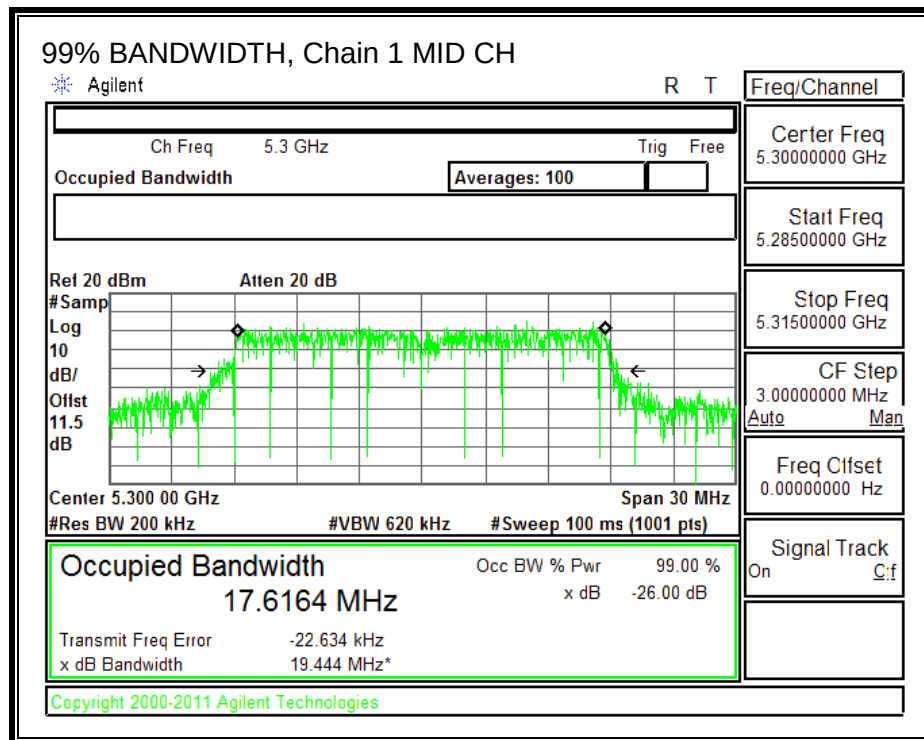

9.8.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter. The power meter was setup for a gated power measurement.

The cable assembly insertion loss of 11.5 dB (including 10 dB pad and 1.5 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

Average Power Results

Channel	Frequency (MHz)	Chain 0 Power (dBm)	Chain 1 Power (dBm)	Total Power (dBm)
Low	5260	15.80	15.87	18.85
Mid	5300	15.78	15.74	18.77
High	5320	13.86	13.73	16.81

9.8.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (1)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26–dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

The transmitter output is connected to a power meter. The power meter was setup for a gated power measurement.

The cable assembly insertion loss of 11.5 dB (including 10 dB pad and 1.5 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
0.75	3.25	2.18

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Correlated Chains Directional Gain (dBi)
0.75	3.25	5.10

RESULTS

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5260	20.58	2.18	5.10	24.00	11.00
Mid	5300	20.61	2.18	5.10	24.00	11.00
High	5320	20.61	2.18	5.10	24.00	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--



Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	15.80	15.87	18.85	24.00	-5.15
Mid	5300	15.78	15.74	18.77	24.00	-5.23
High	5320	13.86	13.73	16.81	24.00	-7.19

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5260	5.01	5.60	8.32	11.00	-2.68
Mid	5300	5.13	5.09	8.12	11.00	-2.88
High	5320	3.04	3.45	6.26	11.00	-4.74

PSD, Chain 0

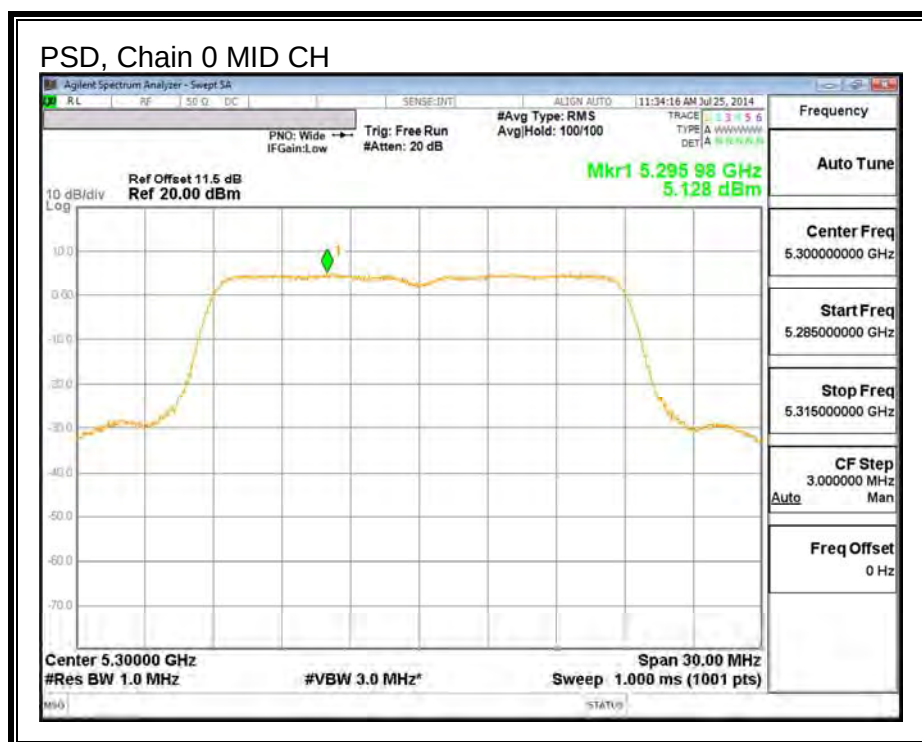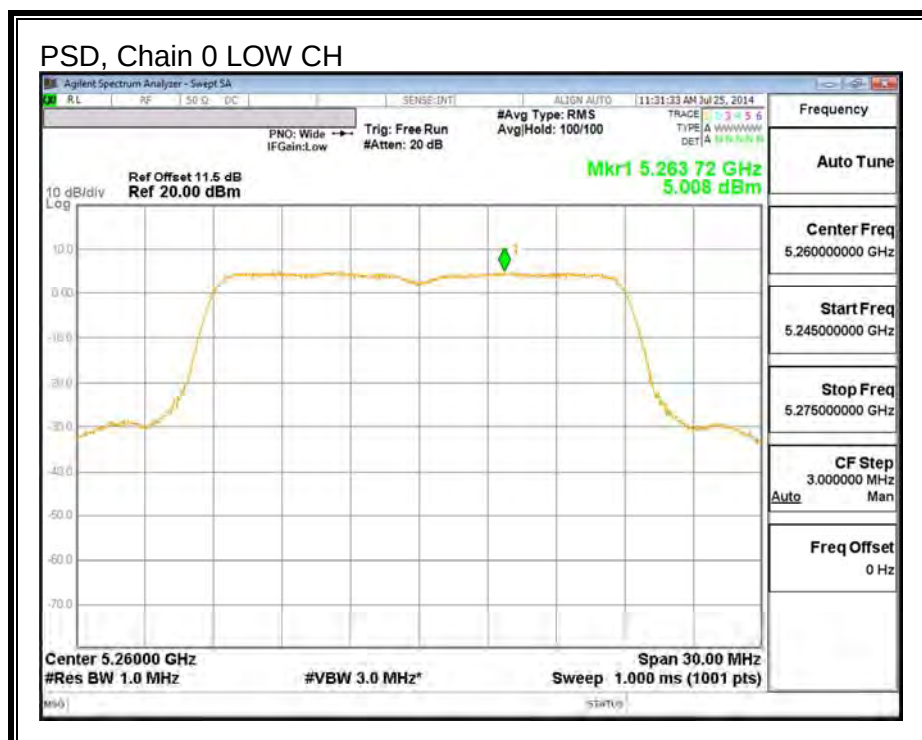



PSD, Chain 0 HIGH CH



PSD, Chain 1

PSD, Chain 1 LOW CH



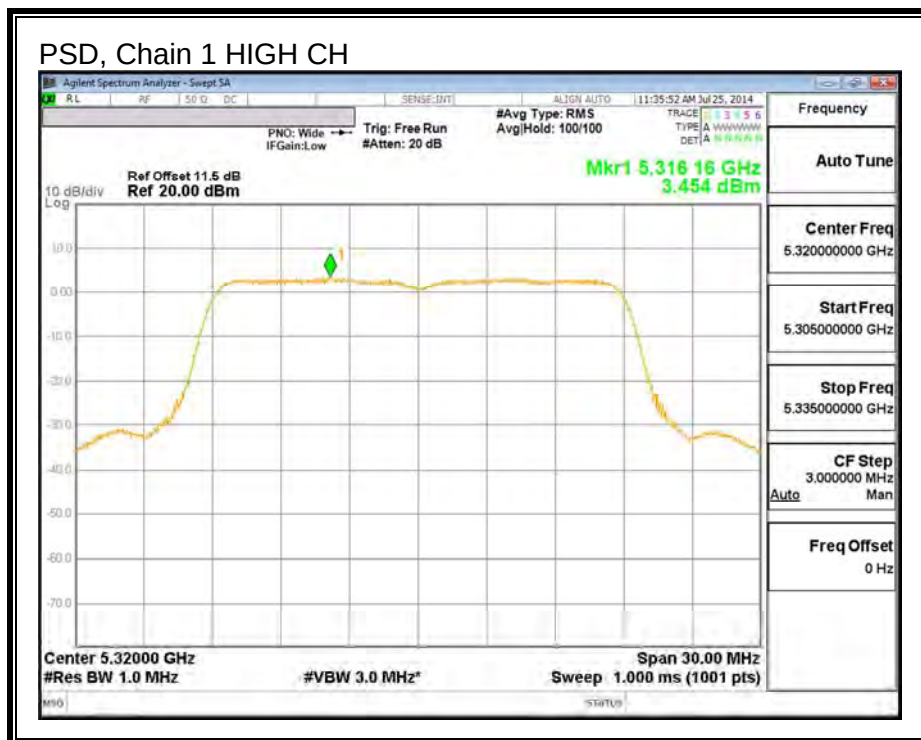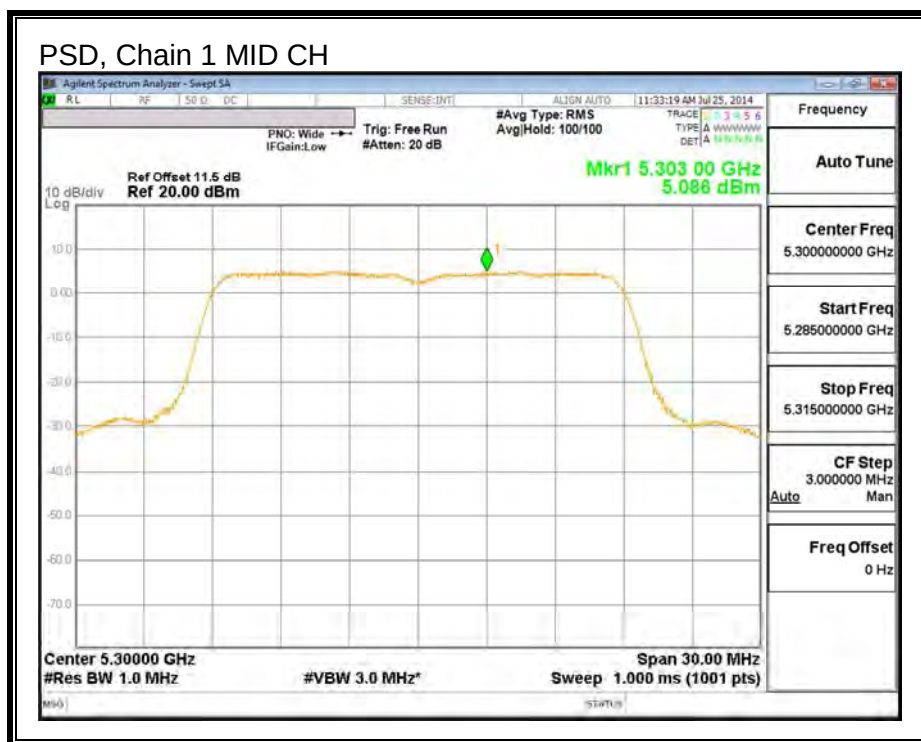

9.9. 802.11n HT40 1Tx MODE IN THE 5.3 GHz BAND

9.9.1. 26 dB BANDWIDTH



LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5270	40.08
High	5310	40.08

26 dB BANDWIDTH

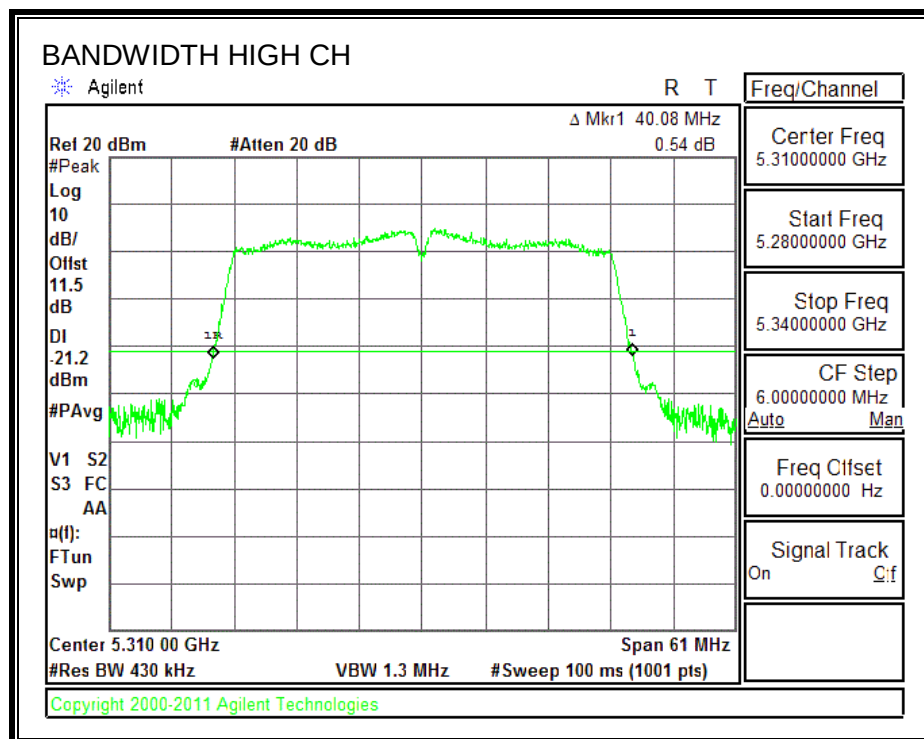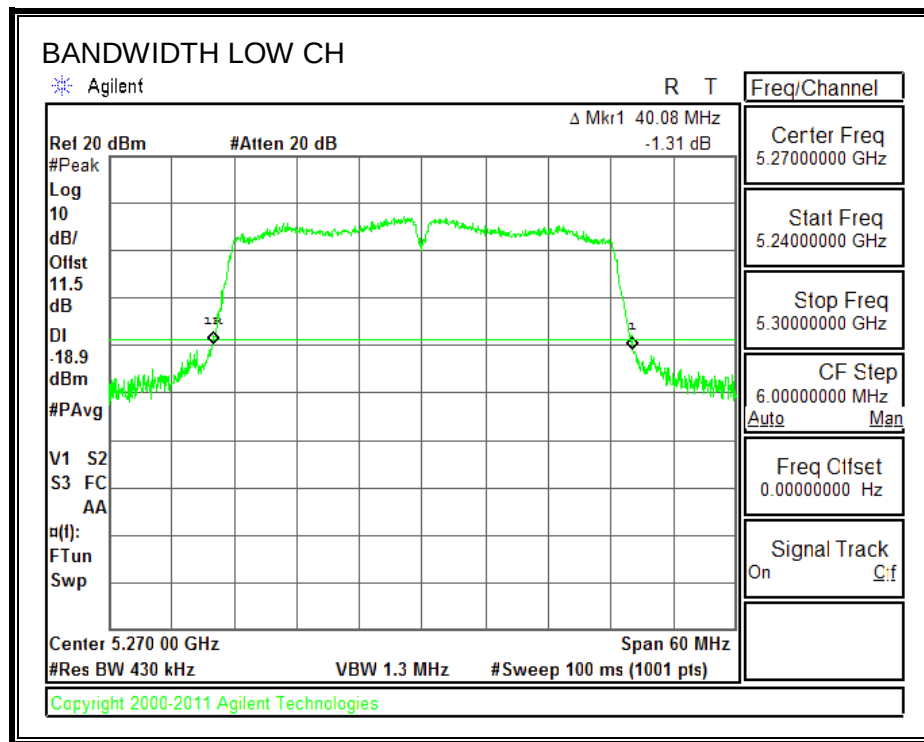

9.9.2. 99% BANDWIDTH



LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5270	36.13
High	5310	36.12

99% BANDWIDTH

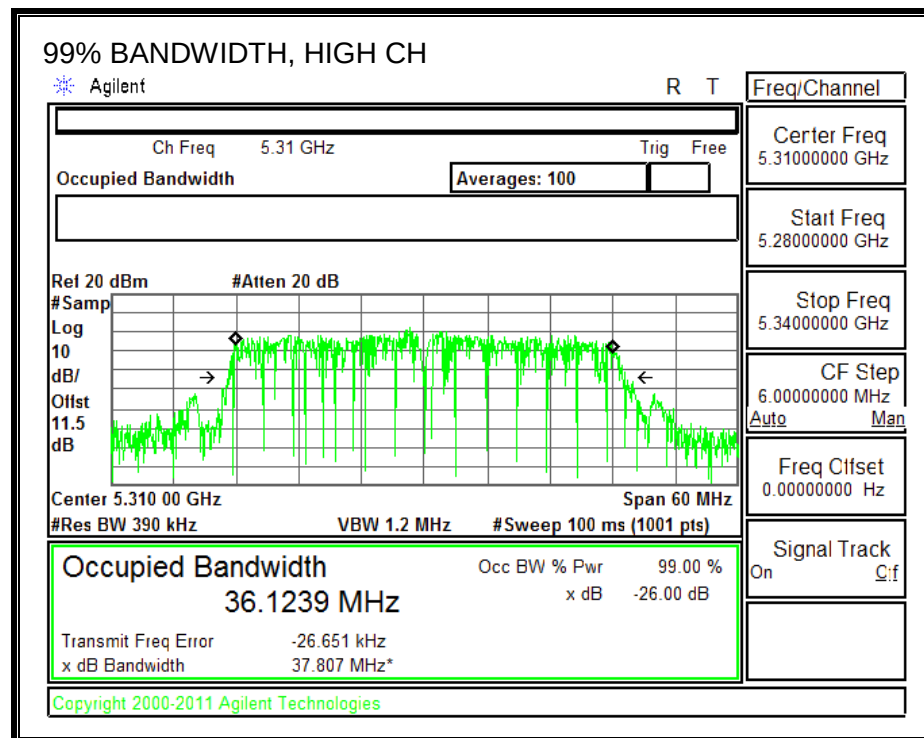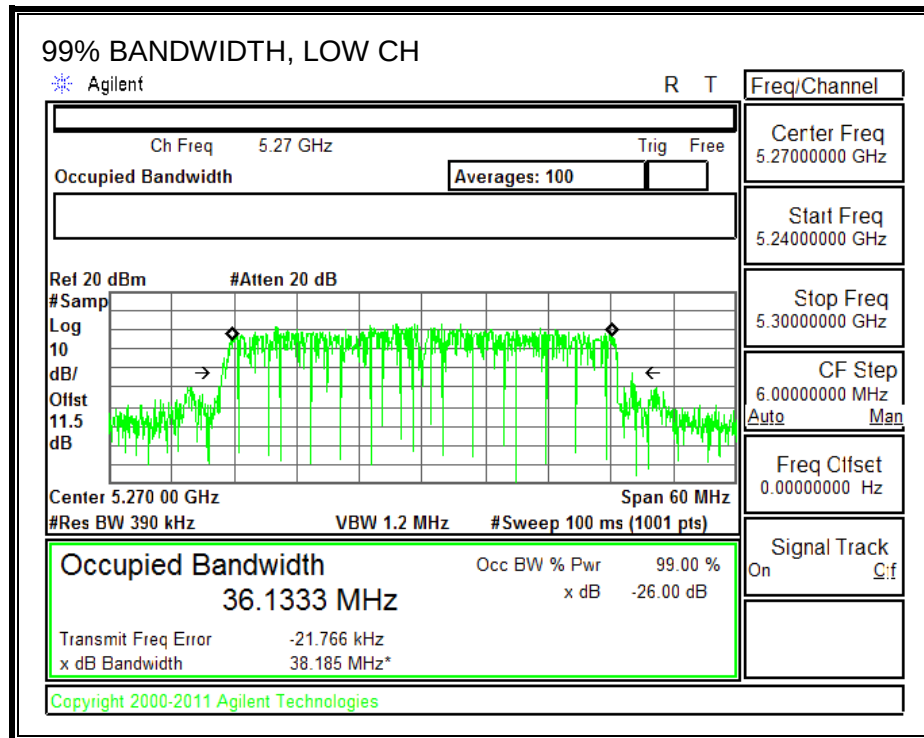

9.9.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter. The power meter was setup for a gated power measurement.

The cable assembly insertion loss of 11.5 dB (including 10 dB pad and 1.5 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

Channel	Frequency (MHz)	Power (dBm)
Low	5270	15.72
High	5310	13.26

9.9.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26-dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

The transmitter output is connected to a power meter. The power meter was setup for a gated power measurement.

The cable assembly insertion loss of 11.5 dB (including 10 dB pad and 1.5 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain

Antenna Gain (dBi)
3.25

RESULTS

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5270	40.08	3.25	24.00	11.00
High	5310	40.08	3.25	24.00	11.00

Duty Cycle CF (dB)	0.13	Included in Calculations of Corr'd Power & PSD
--------------------	------	--


Output Power Results

Channel	Frequency (MHz)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5270	15.72	15.85	24.00	-8.15
High	5310	13.26	13.39	24.00	-10.61

PSD Results

Channel	Frequency (MHz)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5270	2.56	2.69	11.00	-8.31
High	5310	0.06	0.19	11.00	-10.81

PSD, Chain 1

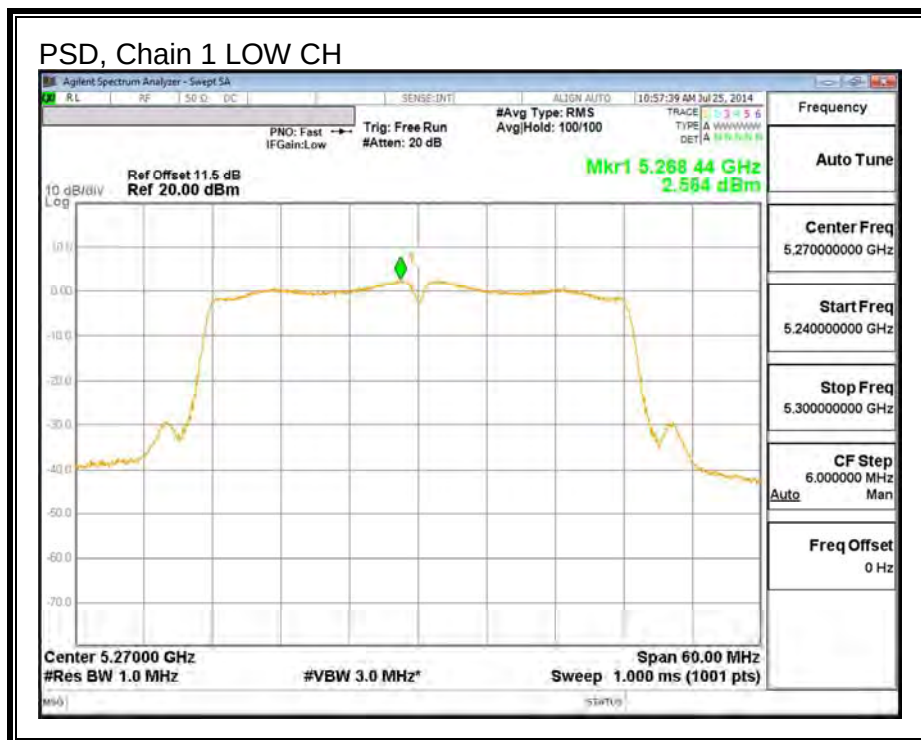

9.10. 802.11n HT40 2Tx CDD MODE IN THE 5.3 GHz BAND

9.10.1. 26 dB BANDWIDTH



LIMITS

None; for reporting purposes only.



RESULTS

Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)
Low	5270	40.2	39.7
High	5310	40.2	39.7

26 dB BANDWIDTH, Chain 0

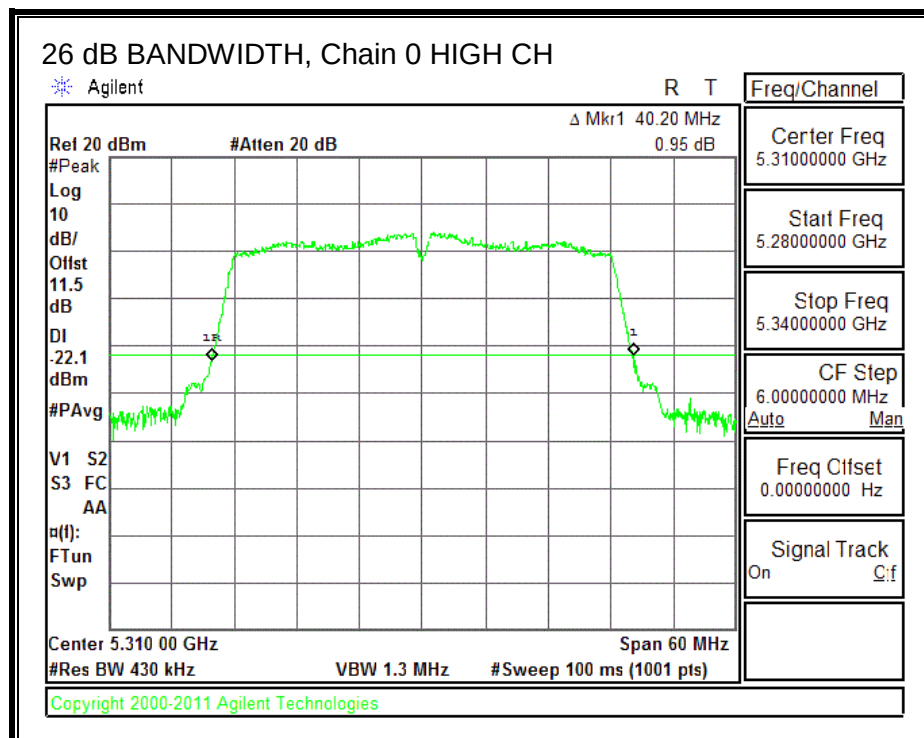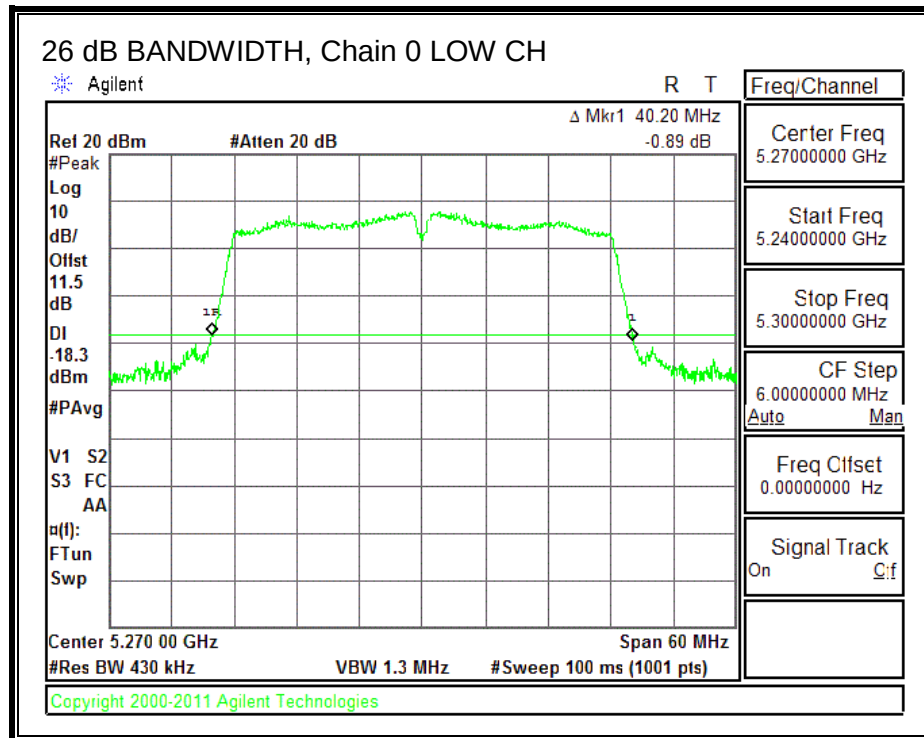

26 dB BANDWIDTH, Chain 1

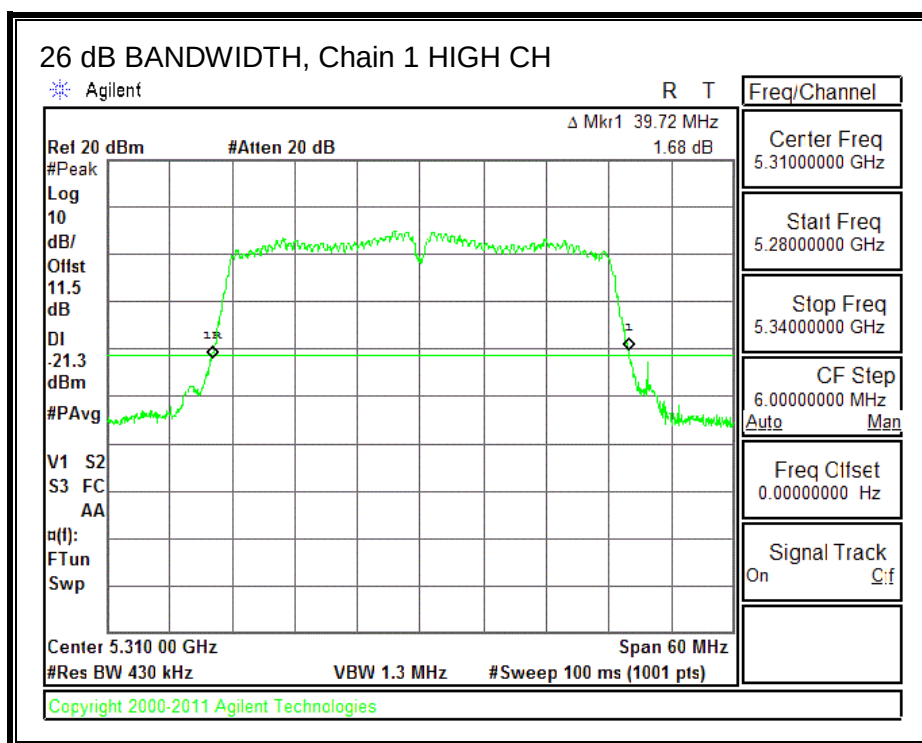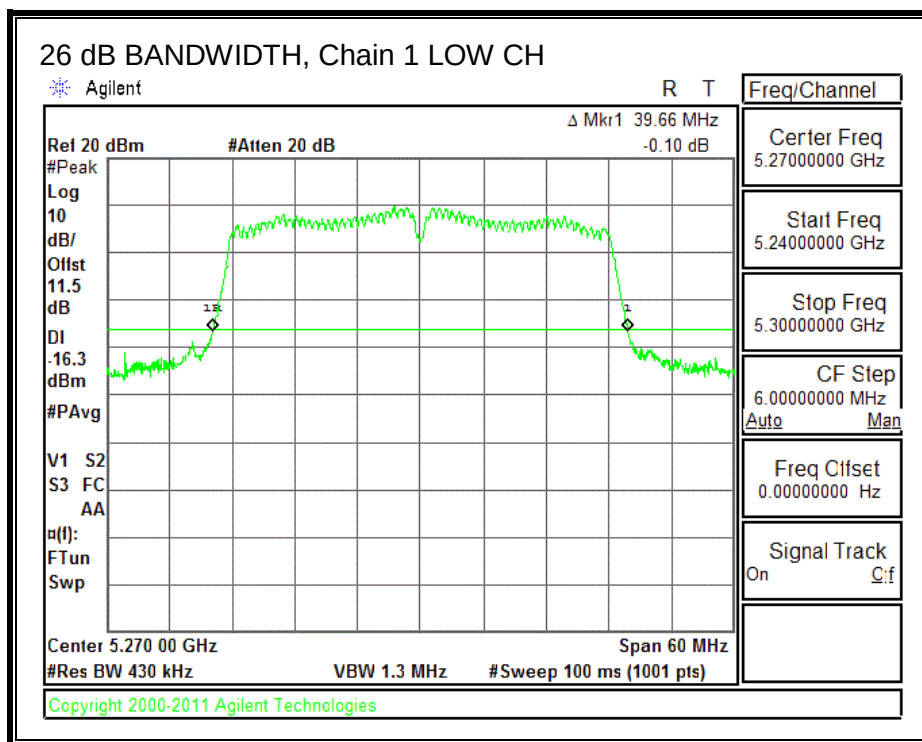

9.10.2. 99% BANDWIDTH



LIMITS

None; for reporting purposes only.



RESULTS

Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)
Low	5270	36.4	36.3
High	5310	36.4	36.4

99% BANDWIDTH, Chain 0

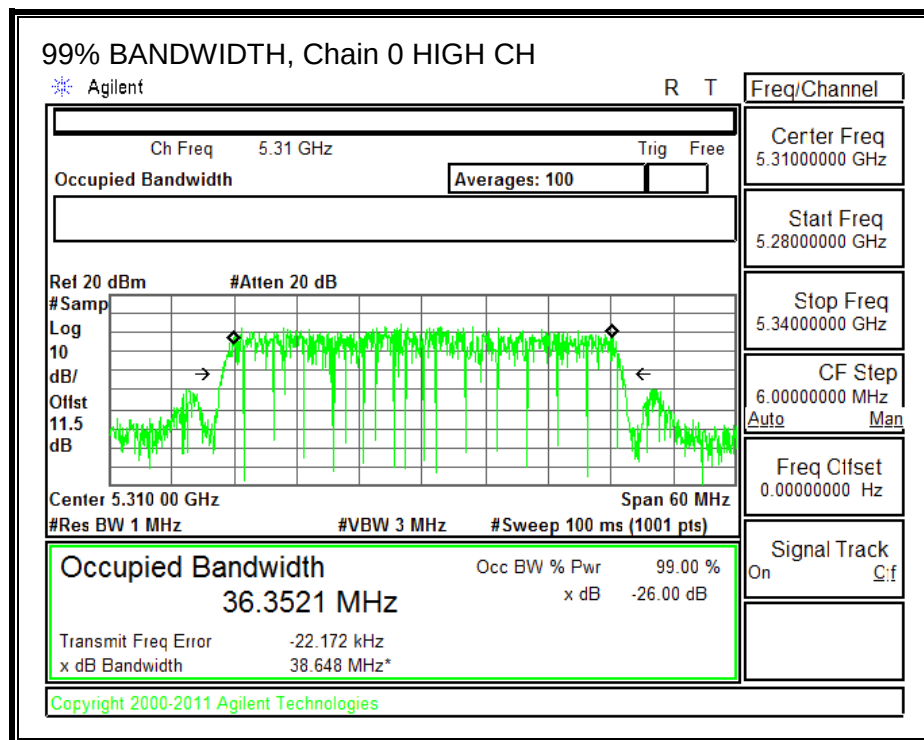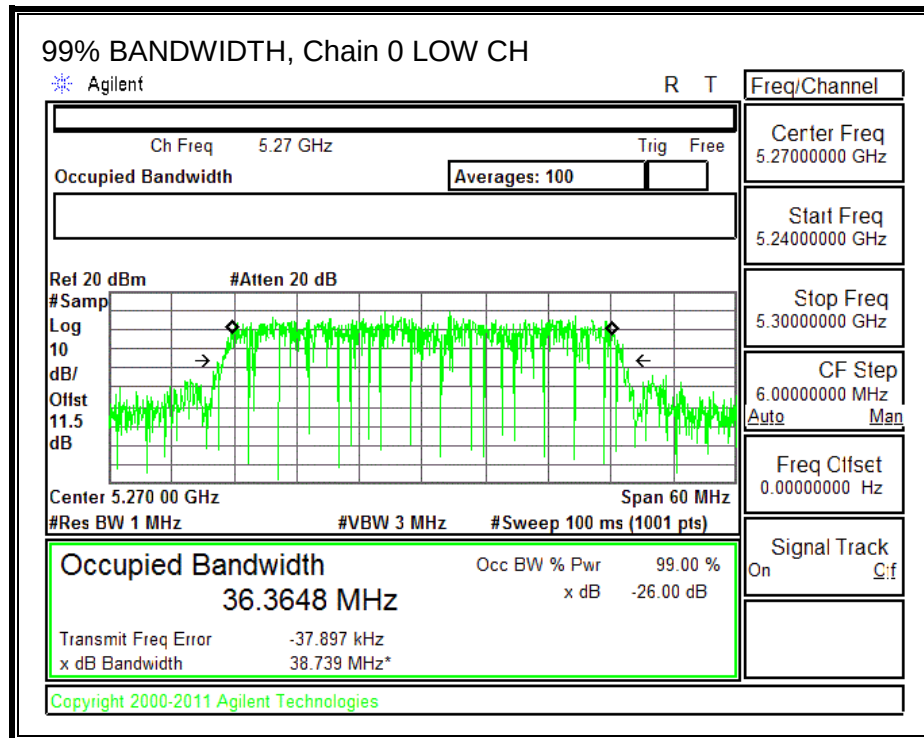

99% BANDWIDTH, Chain 1

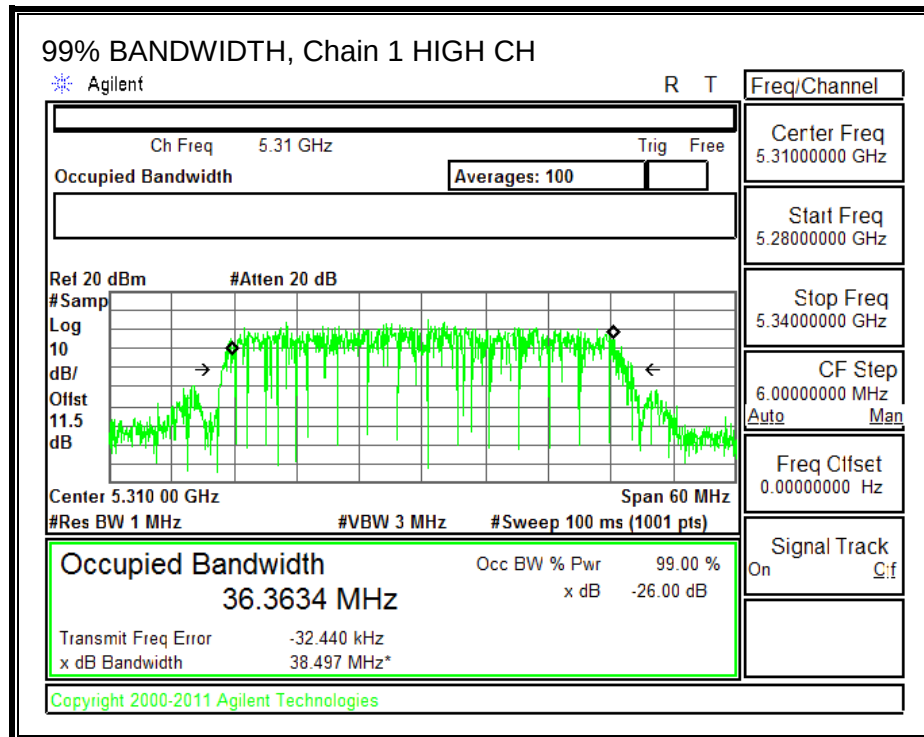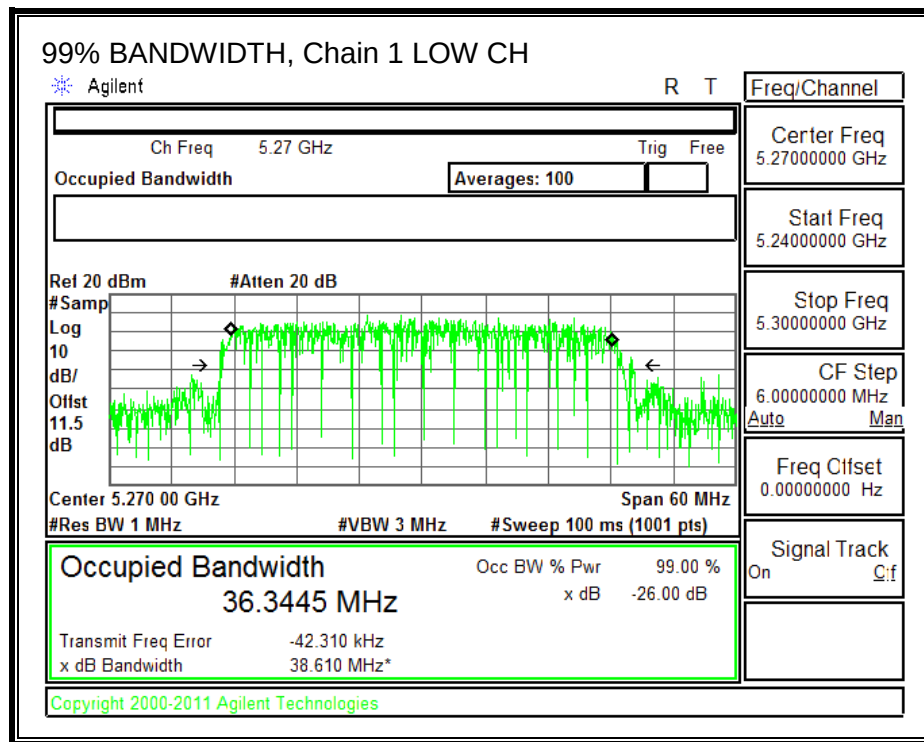

9.10.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter. The power meter was setup for a gated power measurement.

The cable assembly insertion loss of 11.5 dB (including 10 dB pad and 1.5 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

Average Power Results

Channel	Frequency (MHz)	Chain 0 Power (dBm)	Chain 1 Power (dBm)	Total Power (dBm)
Low	5270	15.86	15.83	18.86
High	5310	11.32	11.23	14.29

9.10.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (1)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26-dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

The transmitter output is connected to a power meter. The power meter was setup for a gated power measurement.

The cable assembly insertion loss of 11.5 dB (including 10 dB pad and 1.5 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
0.75	3.25	2.18

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Correlated Chains Directional Gain (dBi)
0.75	3.25	5.10

RESULTS

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5270	39.66	2.18	5.10	24.00	11.00
High	5310	39.72	2.18	5.10	24.00	11.00

Duty Cycle CF (dB)	0.13	Included in Calculations of Corr'd Power & PSD
--------------------	------	--



Output Power Results



Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5270	15.86	15.83	18.99	24.00	-5.01
High	5310	11.32	11.23	14.42	24.00	-9.58

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5270	2.43	2.62	5.67	11.00	-5.33
High	5310	-2.00	-1.58	1.35	11.00	-9.65

PSD, Chain 0

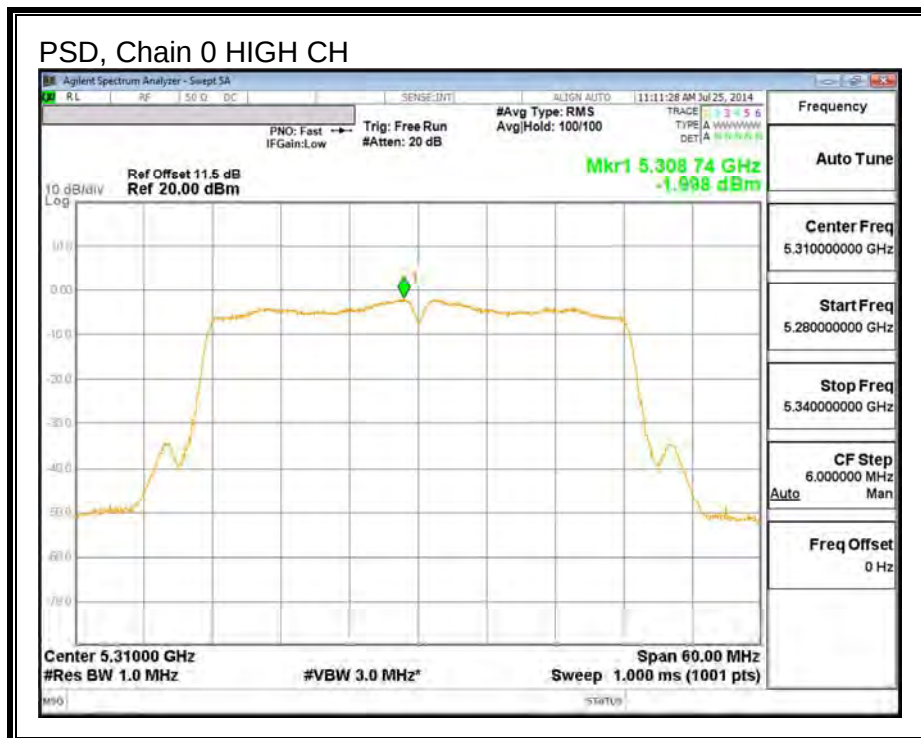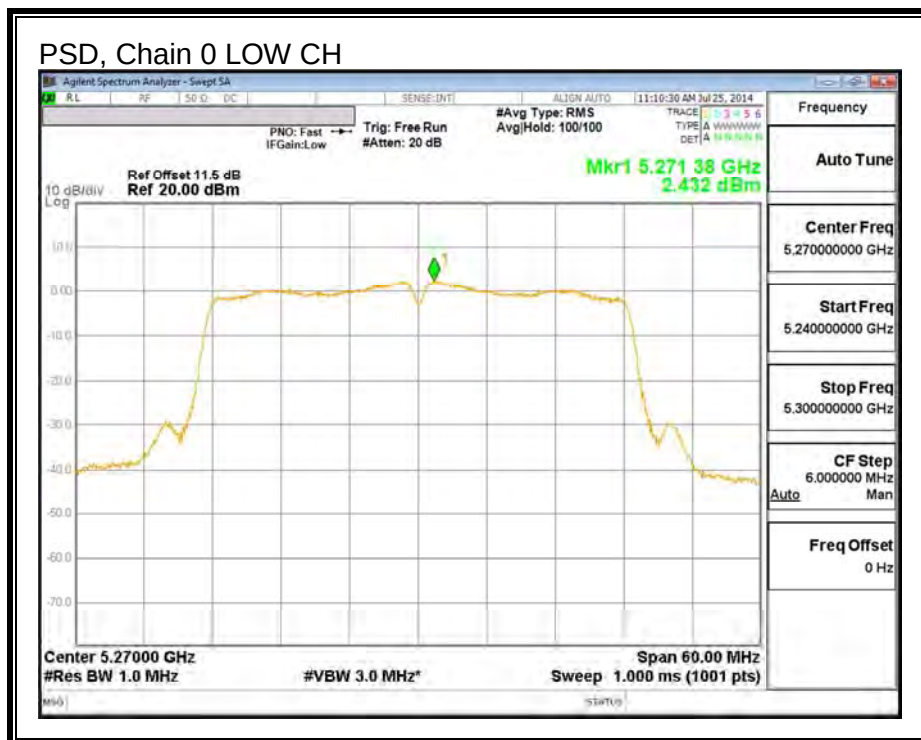

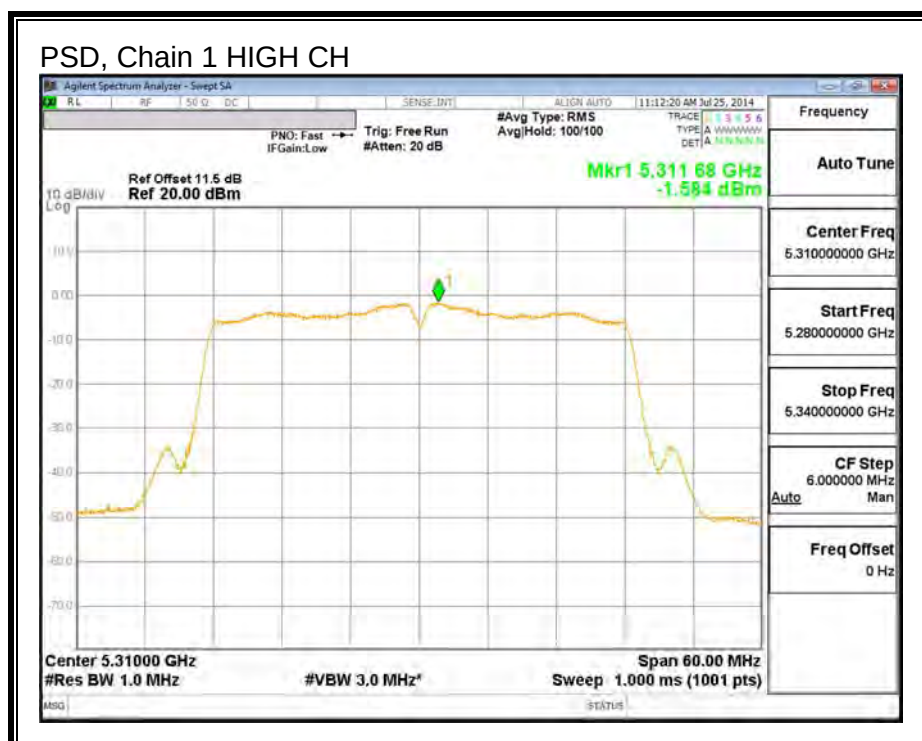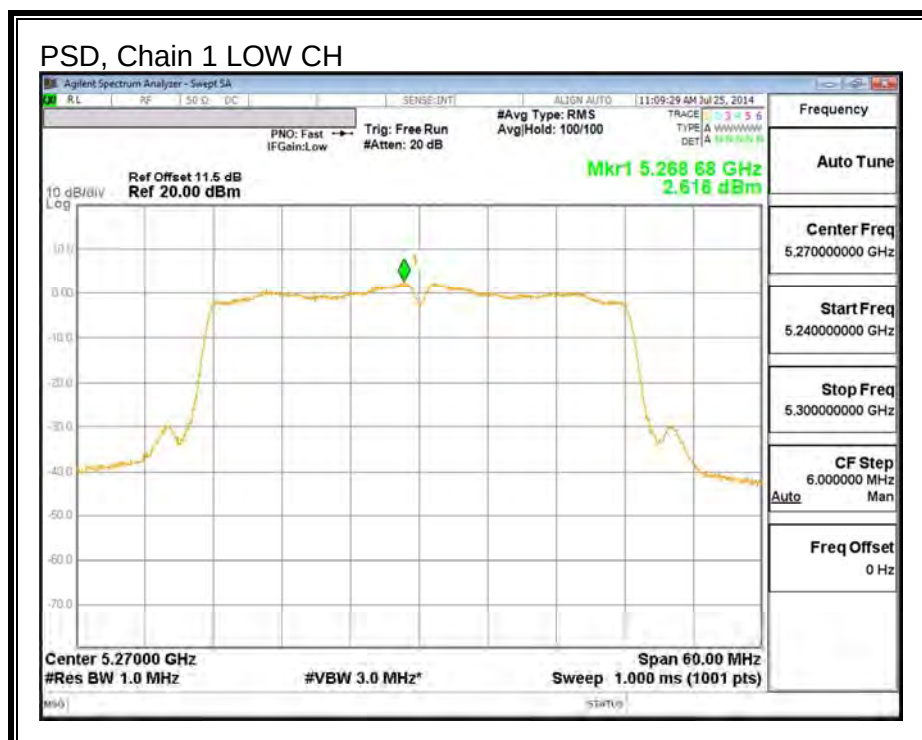PSD, Chain 1

9.11. 802.11a 1Tx MODE IN THE 5.6 GHz BAND

9.11.1. 26 dB BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5500	20.28
Mid	5580	20.28
High	5700	20.31

26 dB BANDWIDTH

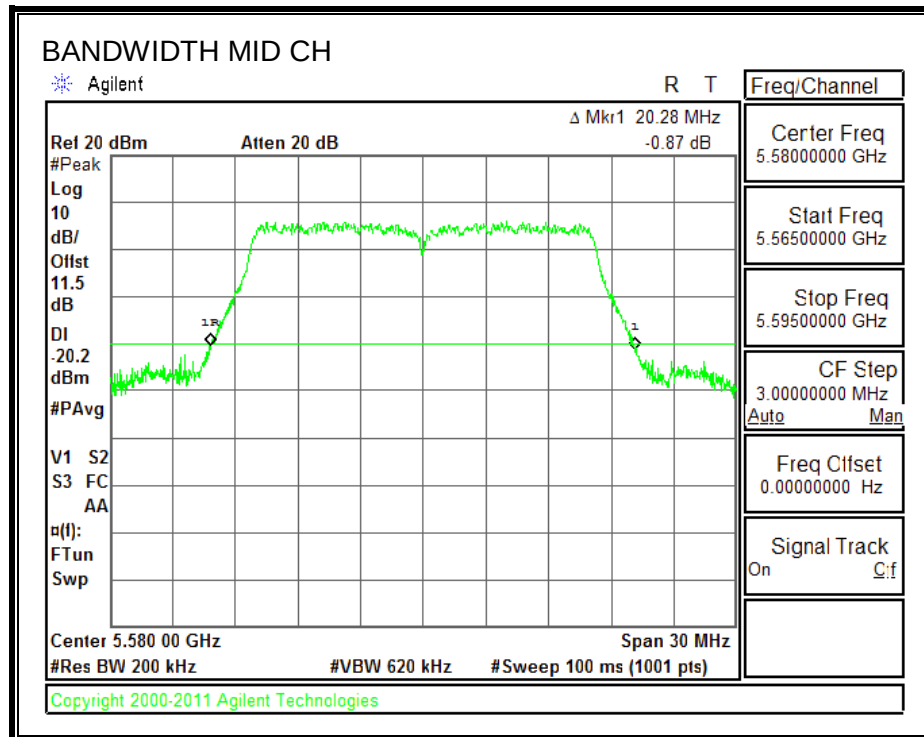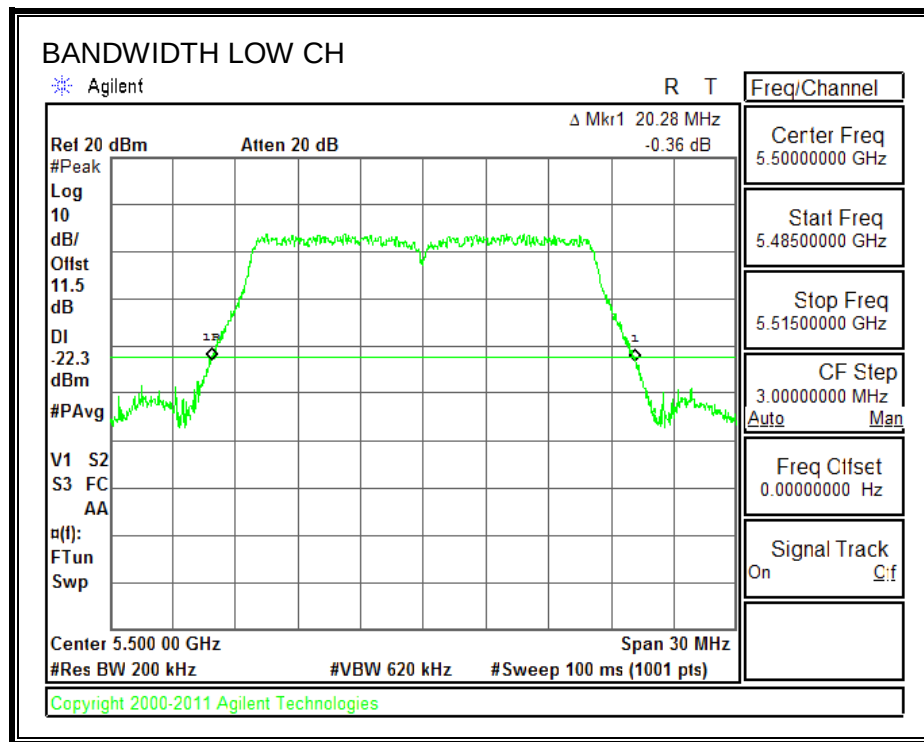

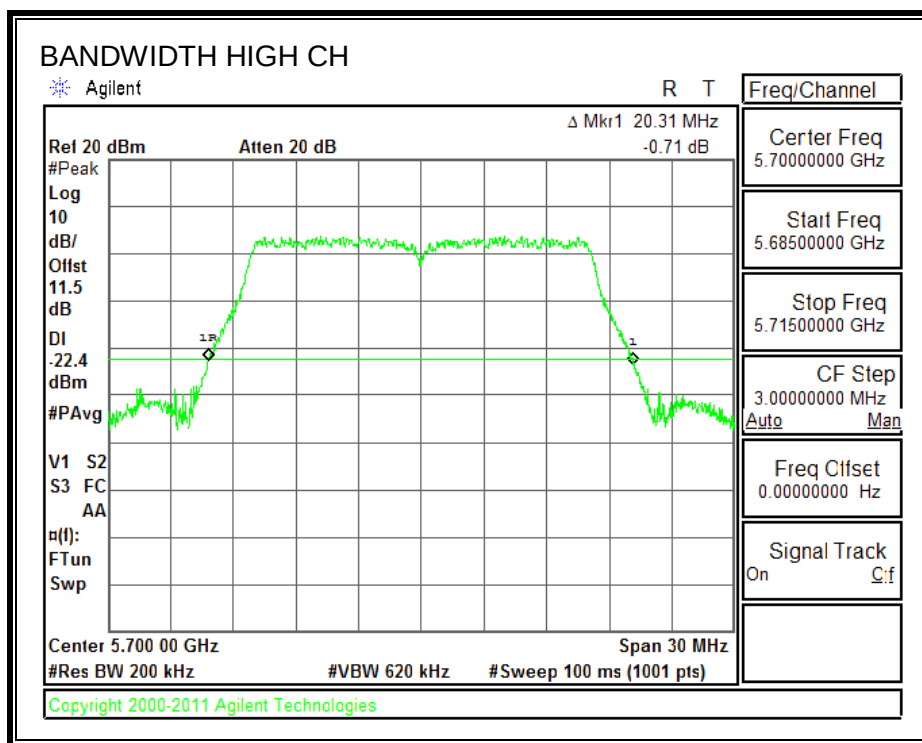

9.11.2. 99% BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5500	16.47
Mid	5580	16.47
High	5700	16.46

99% BANDWIDTH

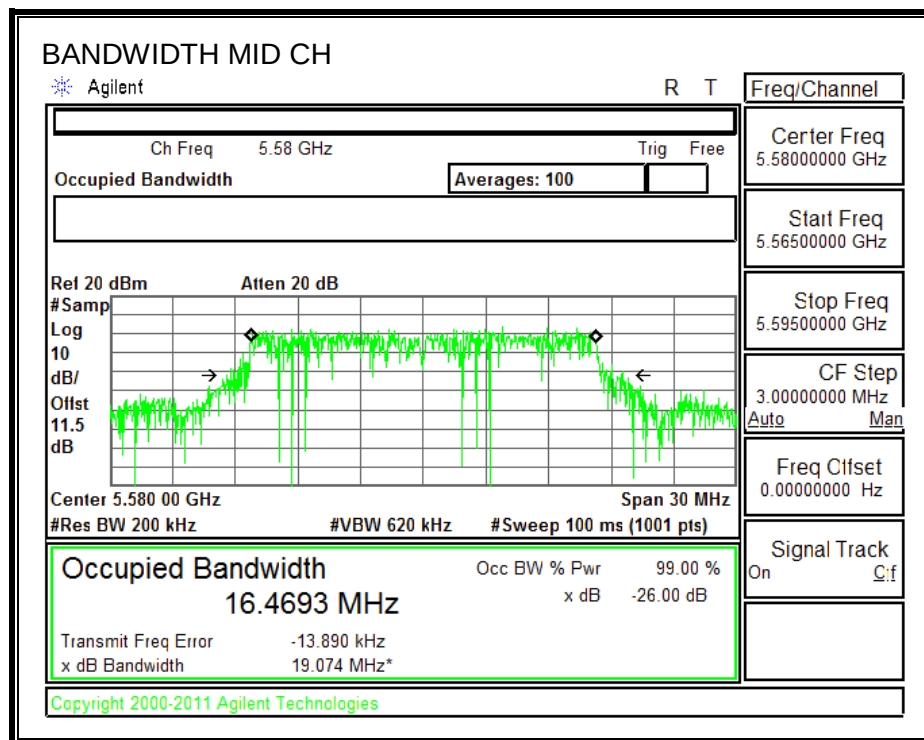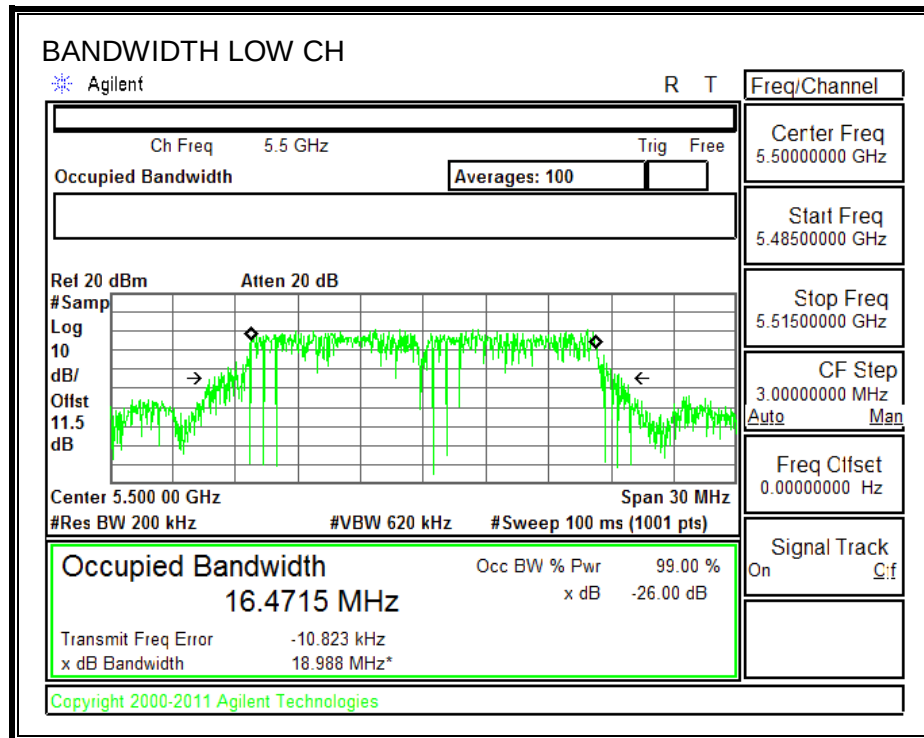

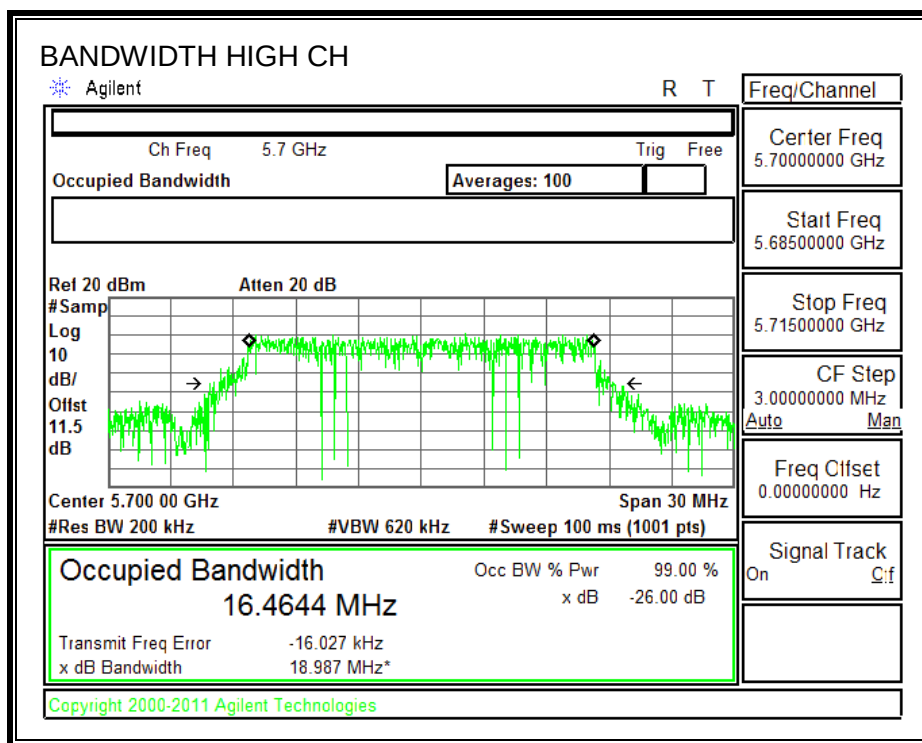

9.11.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter. The power meter was setup for a gated power measurement.

The cable assembly insertion loss of 11.5 dB (including 10 dB pad and 1.5 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

Channel	Frequency (MHz)	Power (dBm)
Low	5500	13.75
Mid	5580	15.22
High	5700	13.74

9.11.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.5–5.7 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26–dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

The transmitter output is connected to a power meter. The power meter was setup for a gated power measurement.

The cable assembly insertion loss of 11.5 dB (including 10 dB pad and 1.5 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

Antenna Gain (dBi)
4.29

RESULTS

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5500	20.28	4.29	24.00	11.00
Mid	5600	20.28	4.29	24.00	11.00
High	5700	20.31	4.29	24.00	11.00



Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--


Output Power Results

Channel	Frequency (MHz)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5500	13.75	13.75	24.00	-10.25
Mid	5600	15.22	15.22	24.00	-8.78
High	5700	13.74	13.74	24.00	-10.26

PSD Results

Channel	Frequency (MHz)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5500	3.35	3.35	11.00	-7.65
Mid	5600	4.50	4.50	11.00	-6.50
High	5700	2.82	2.82	11.00	-8.19

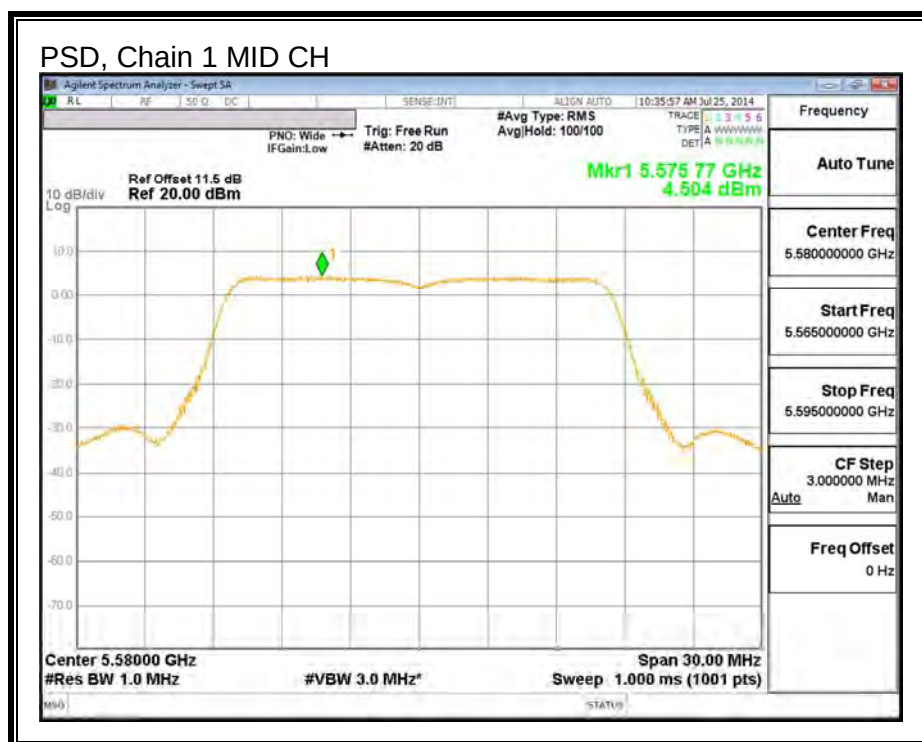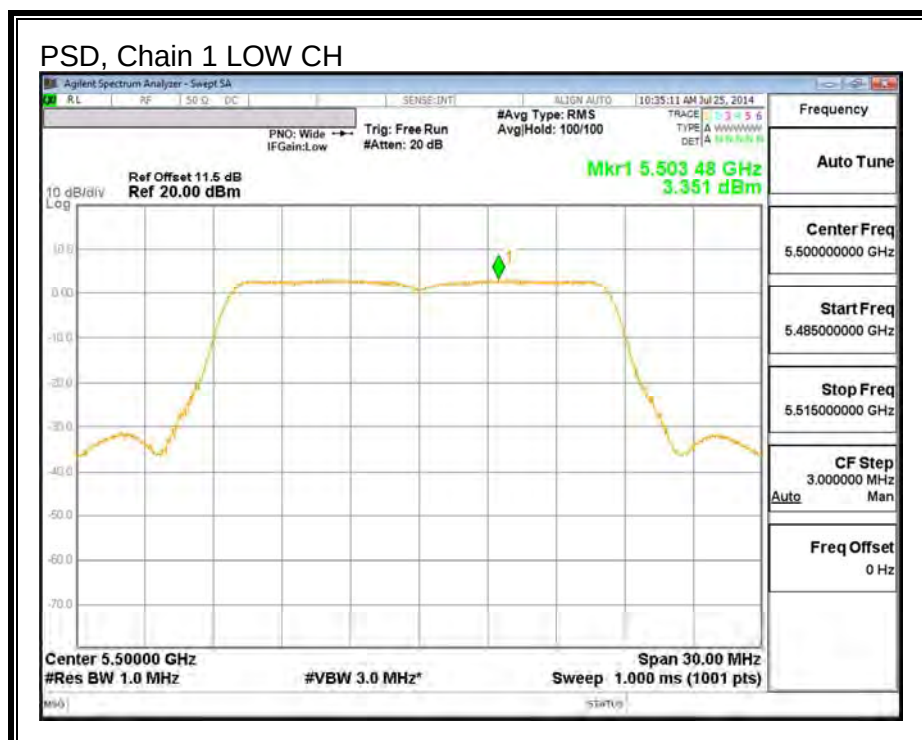PSD, Chain 1

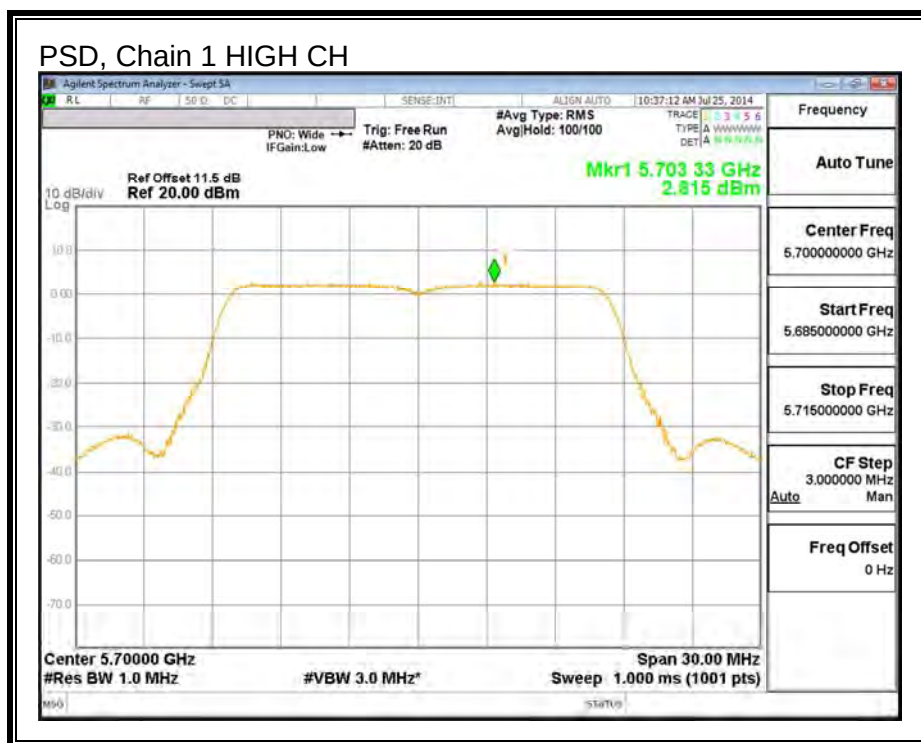

9.12. 802.11n HT20 1Tx MODE IN THE 5.6 GHz BAND

9.12.1. 26 dB BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5500	20.55
Mid	5580	20.58
High	5700	20.70

26 dB BANDWIDTH

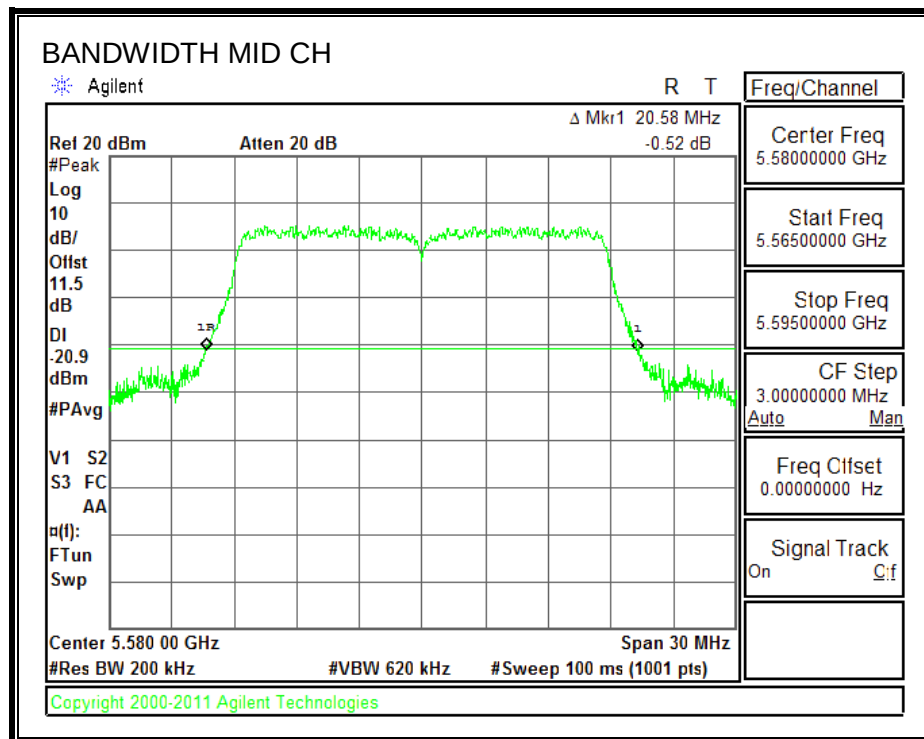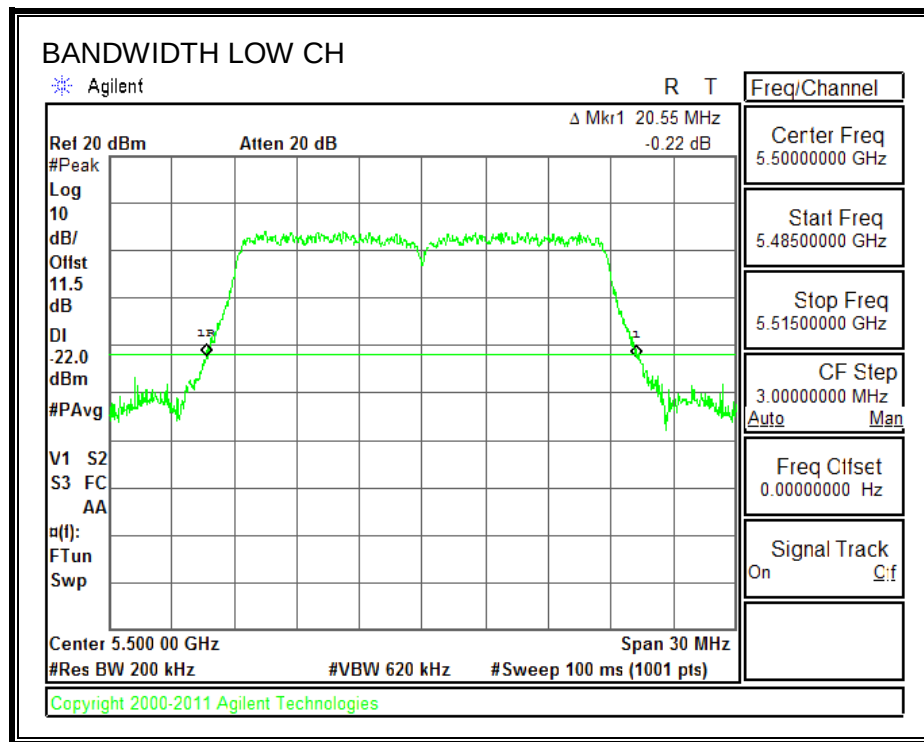

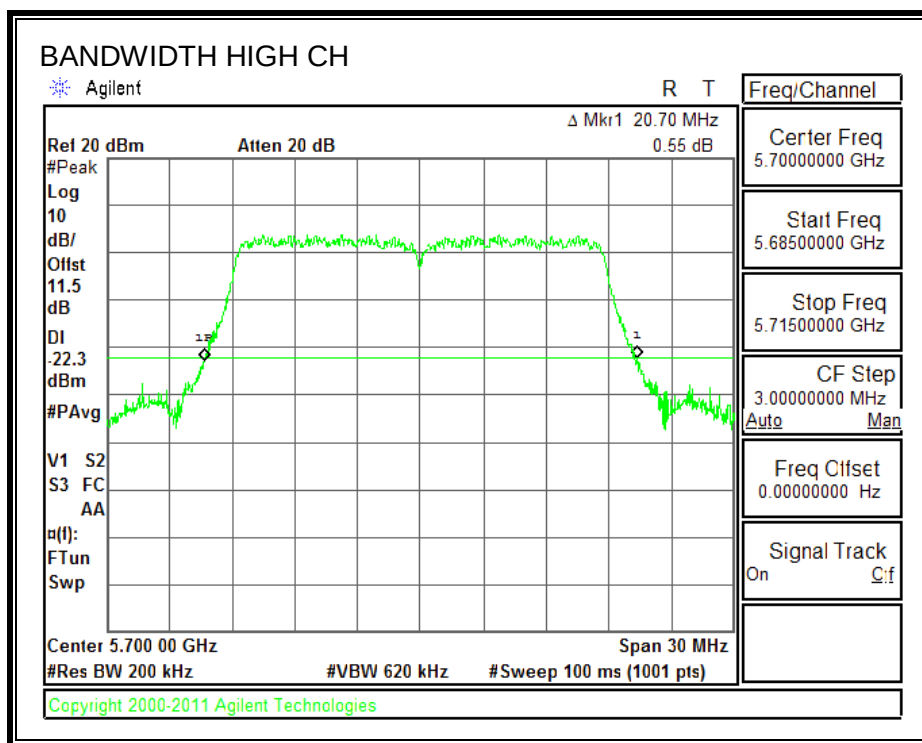

9.12.2. 99% Bandwidth



LIMITS


None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5500	17.61
Mid	5580	17.62
High	5700	17.61

99% BANDWIDTH

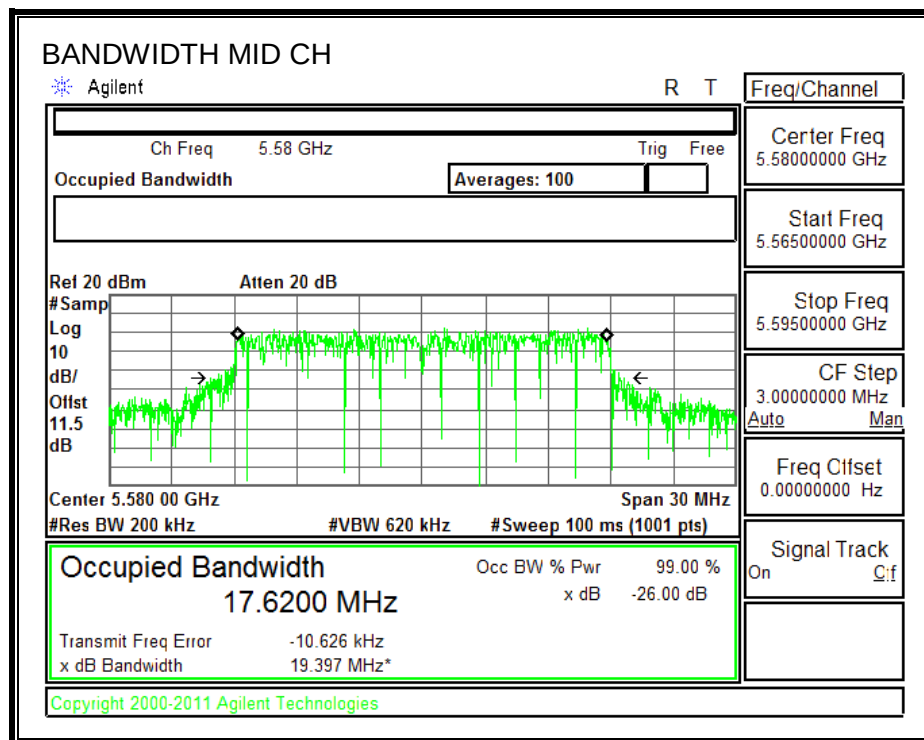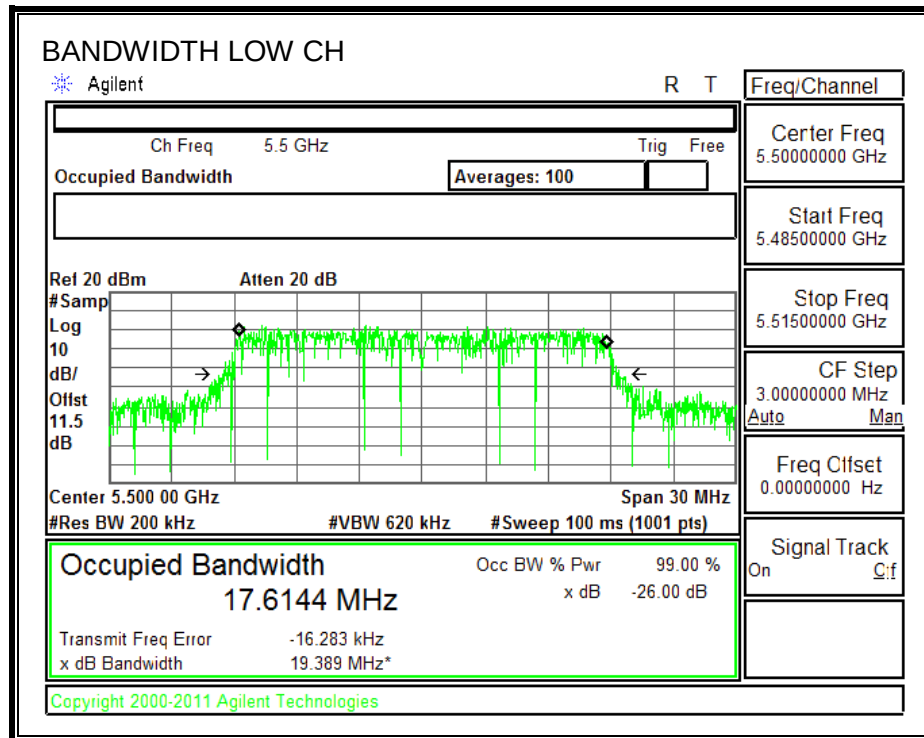

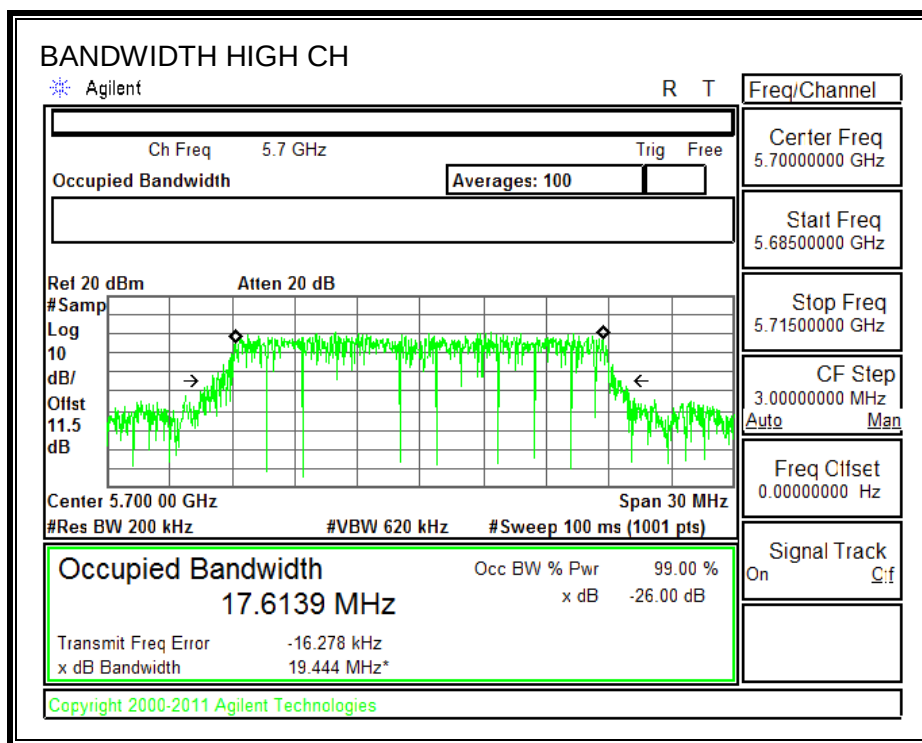

9.12.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter. The power meter was setup for a gated power measurement.

The cable assembly insertion loss of 11.5 dB (including 10 dB pad and 1.5 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

Channel	Frequency (MHz)	Power (dBm)
Low	5500	13.75
Mid	5580	15.33
High	5700	13.82

9.12.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.5–5.7 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26–dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

The transmitter output is connected to a power meter. The power meter was setup for a gated power measurement.

The cable assembly insertion loss of 11.5 dB (including 10 dB pad and 1.5 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

Antenna Gain (dBi)
4.29

RESULTS

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5500	20.6	4.29	24.00	11.00
Mid	5600	20.6	4.29	24.00	11.00
High	5700	20.7	4.29	24.00	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--



Output Power Results


Channel	Frequency (MHz)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5500	13.75	13.75	24.00	-10.25
Mid	5600	15.33	15.33	24.00	-8.67
High	5700	13.82	13.82	24.00	-10.18

PSD Results

Channel	Frequency (MHz)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5500	3.08	3.08	11.00	-7.92
Mid	5600	4.16	4.16	11.00	-6.84
High	5700	2.32	2.32	11.00	-8.68

PSD, Chain 1

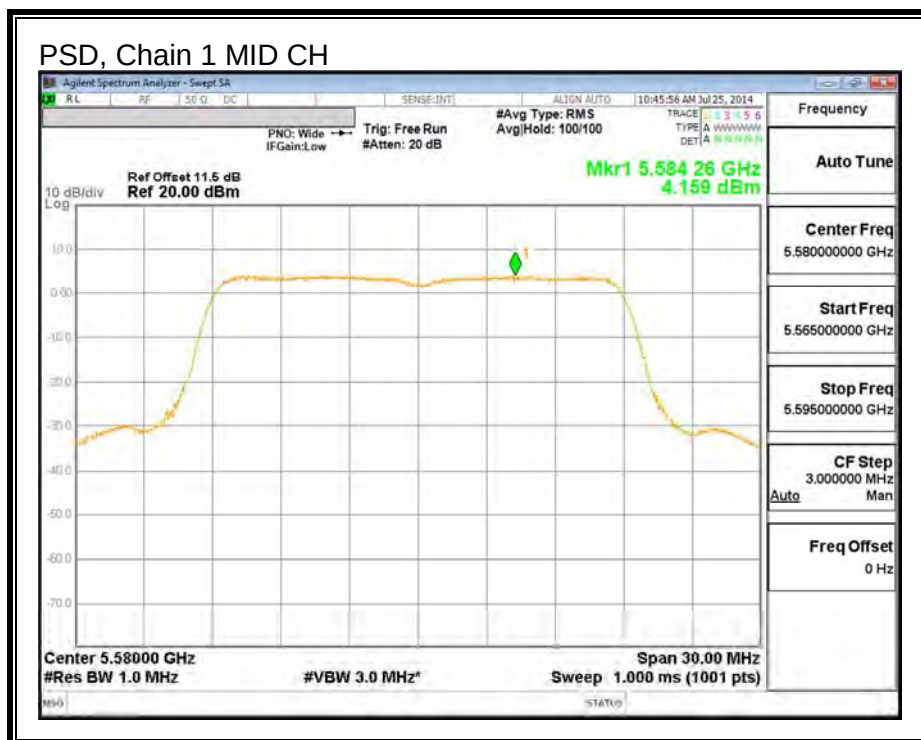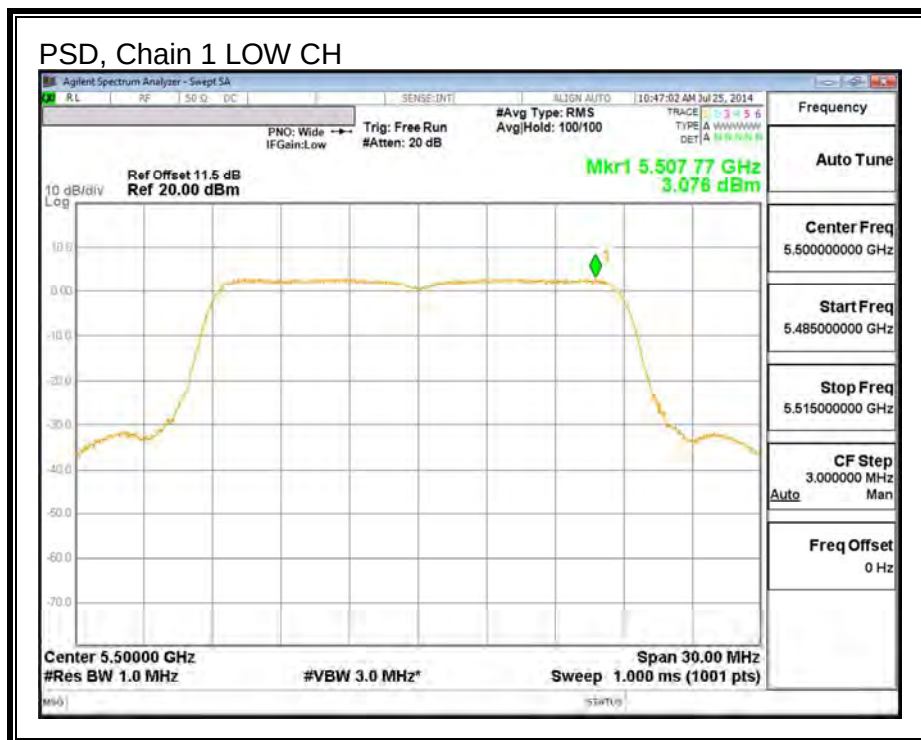

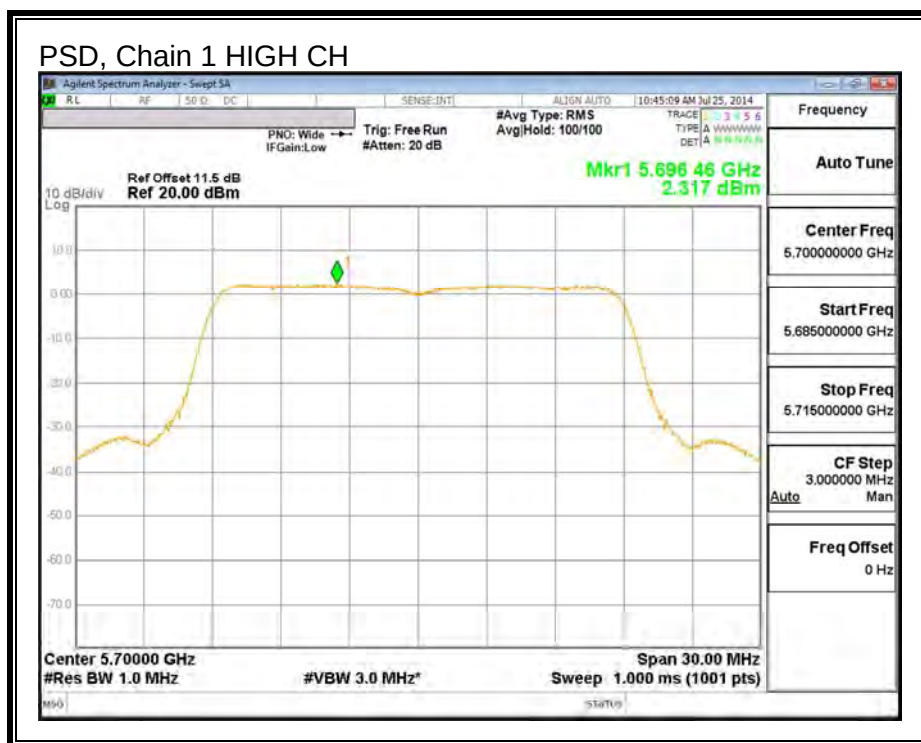

9.13. 802.11n HT20 2Tx CDD MODE IN THE 5.6 GHz BAND

9.13.1. 26 dB BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS


Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)
Low	5500	20.7	20.6
Mid	5580	20.8	20.6
High	5700	20.7	20.5



26 dB BANDWIDTH, Chain 0

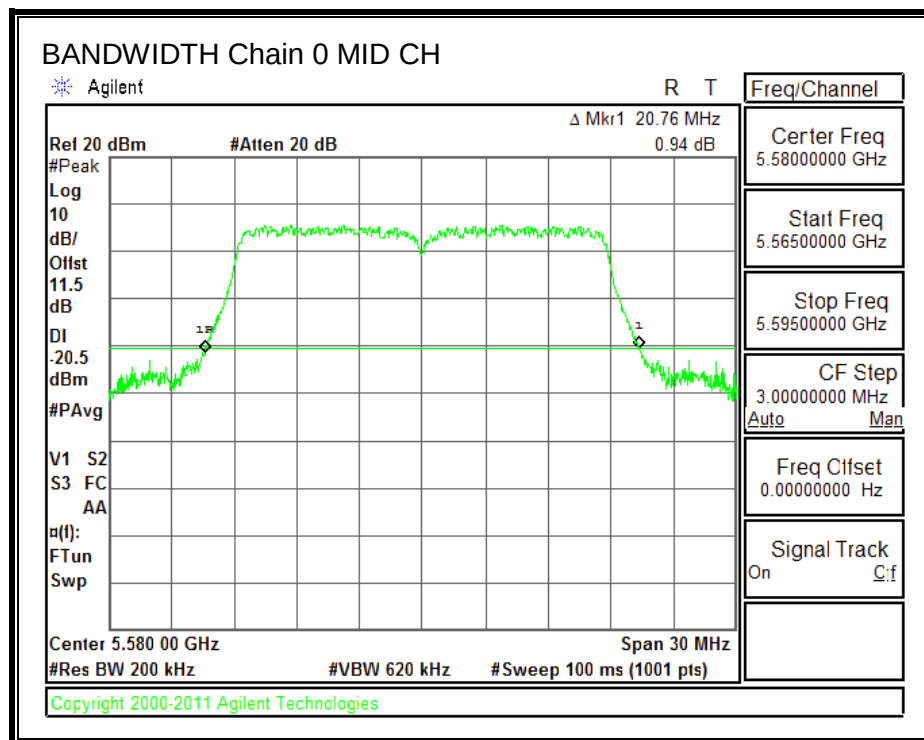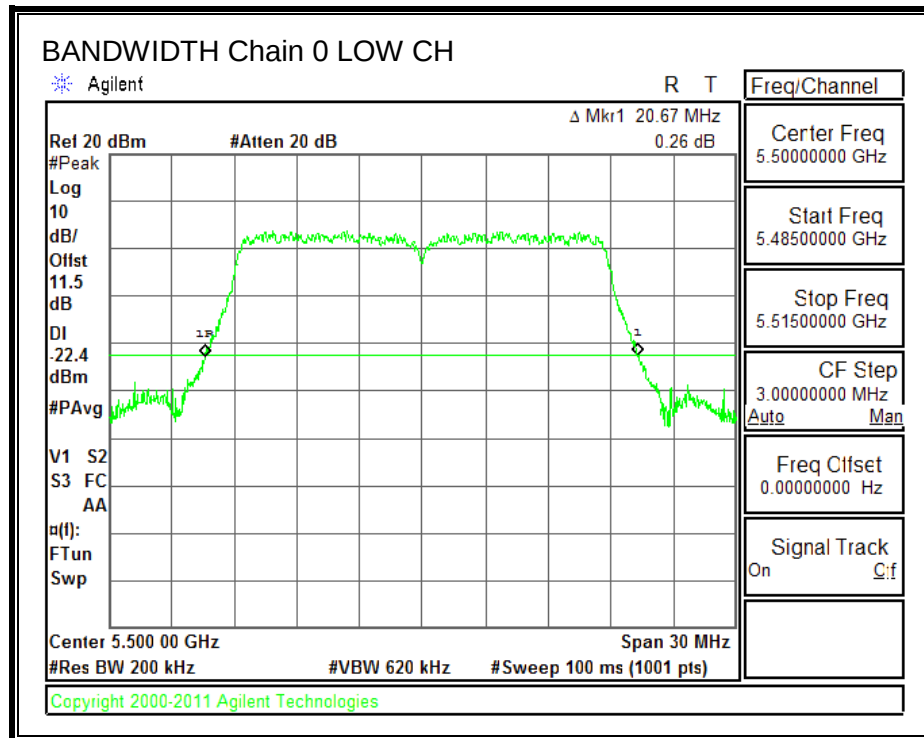

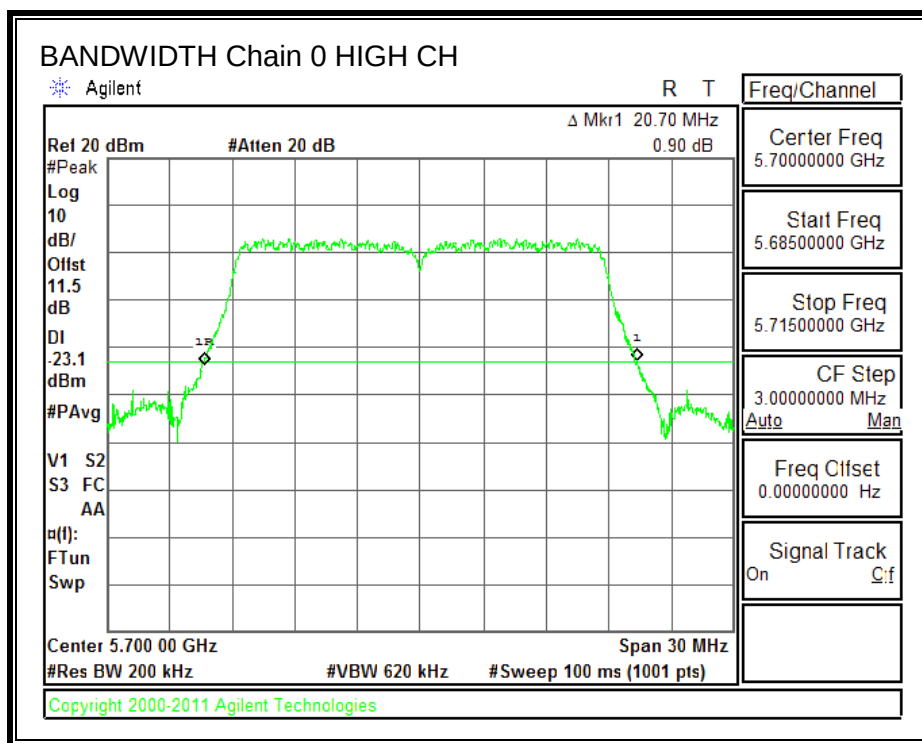

26 dB BANDWIDTH, Chain 1

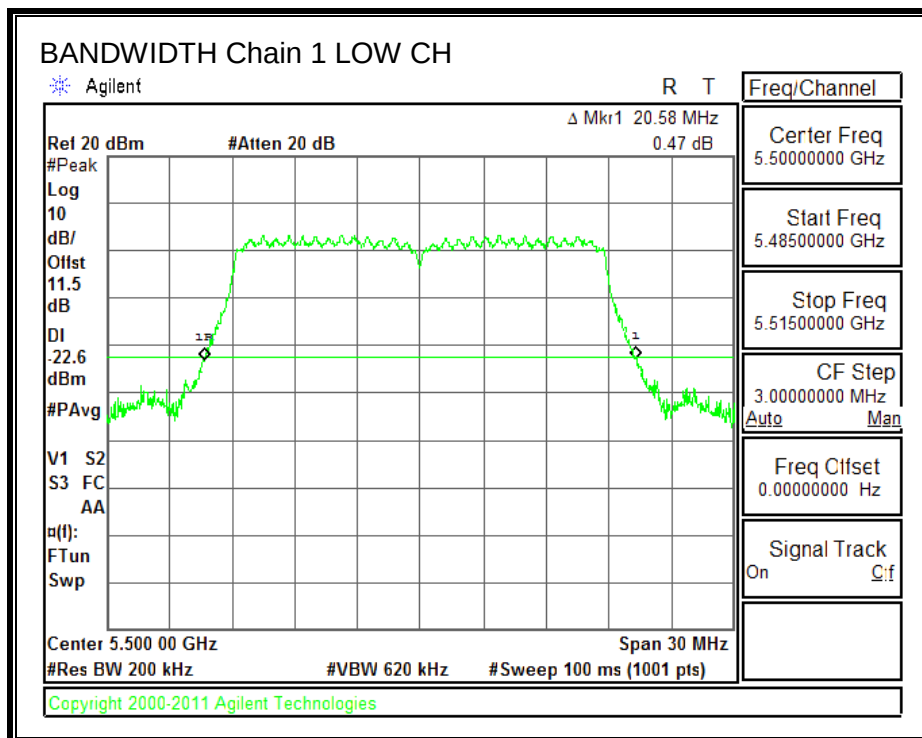

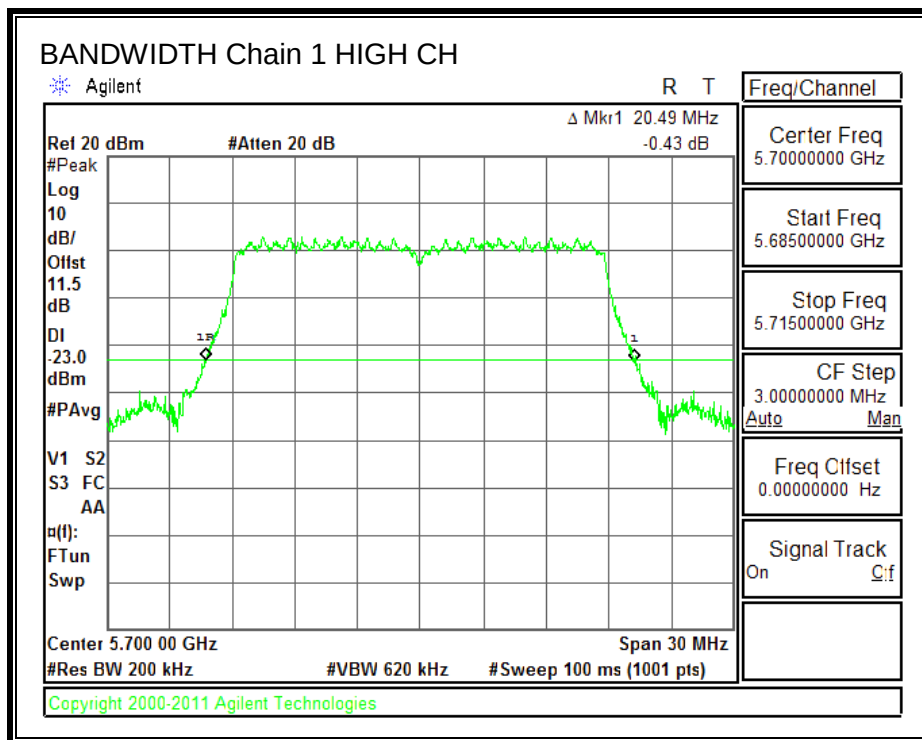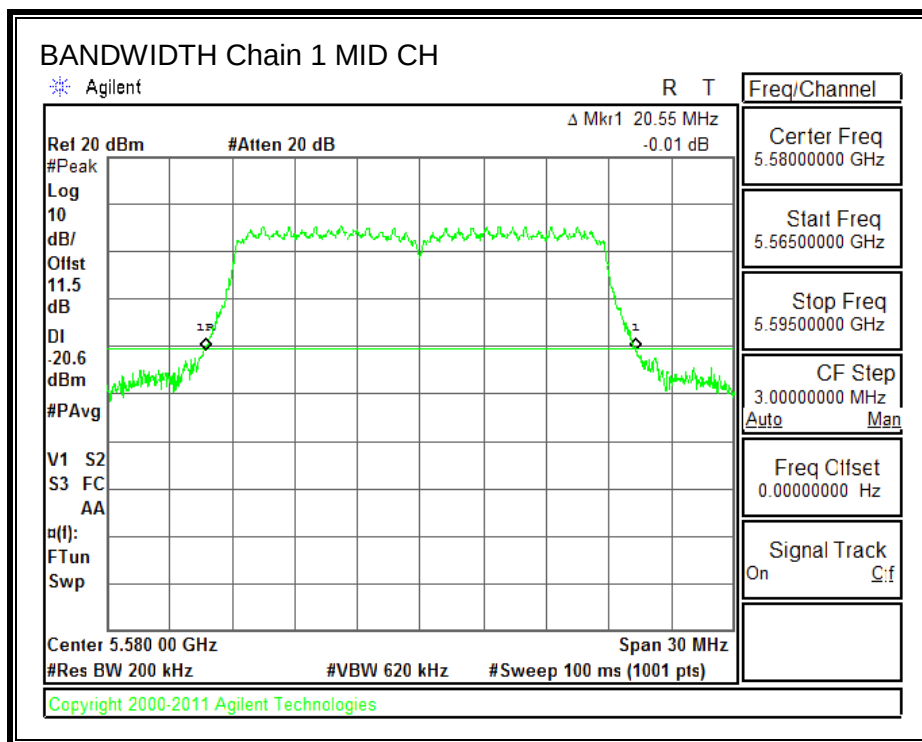

9.13.2. 99% BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS


Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)
Low	5500	17.6	17.6
Mid	5580	17.6	17.6
High	5700	17.6	17.6



99% BANDWIDTH, Chain 0

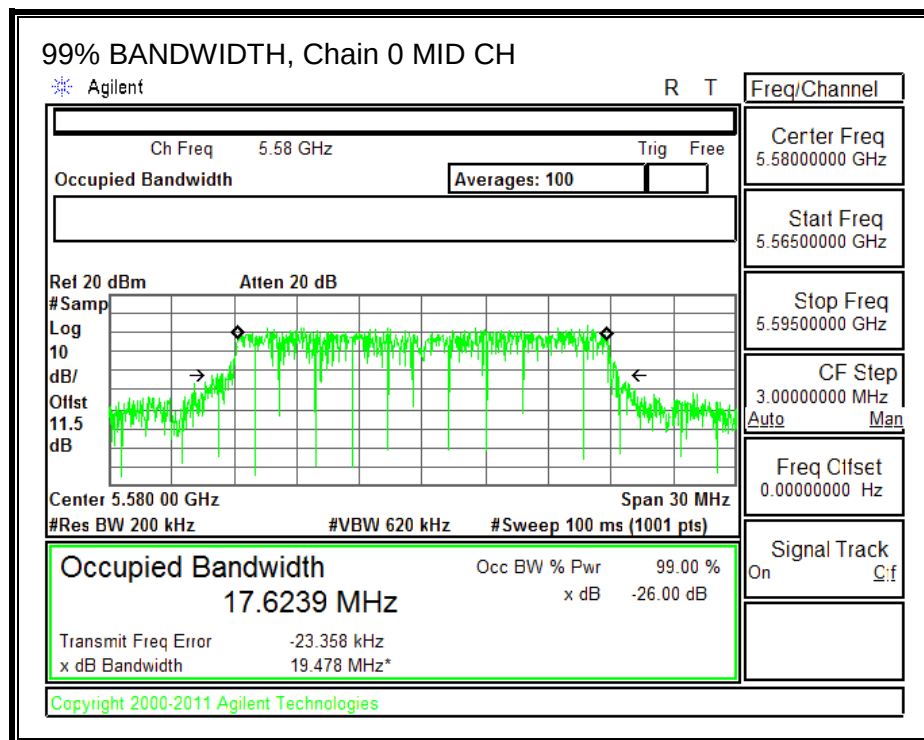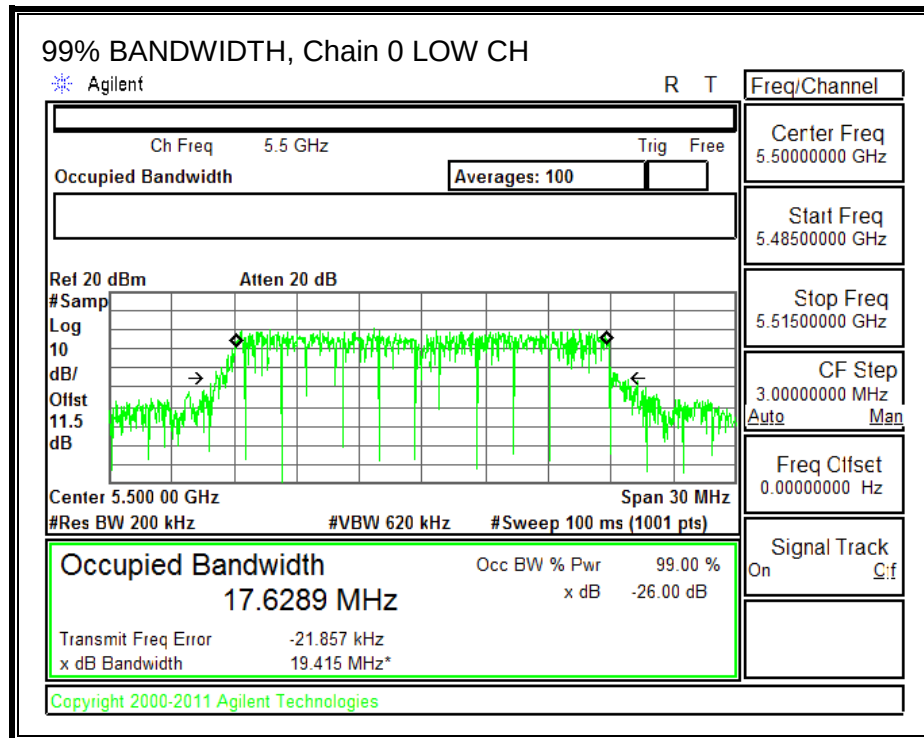

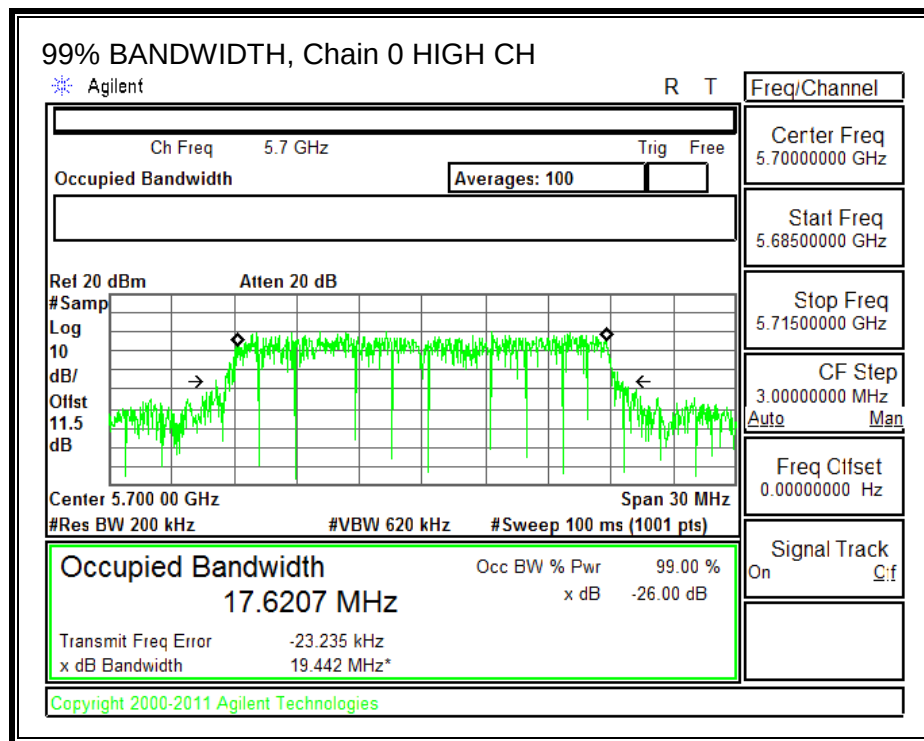

99% BANDWIDTH, Chain 1

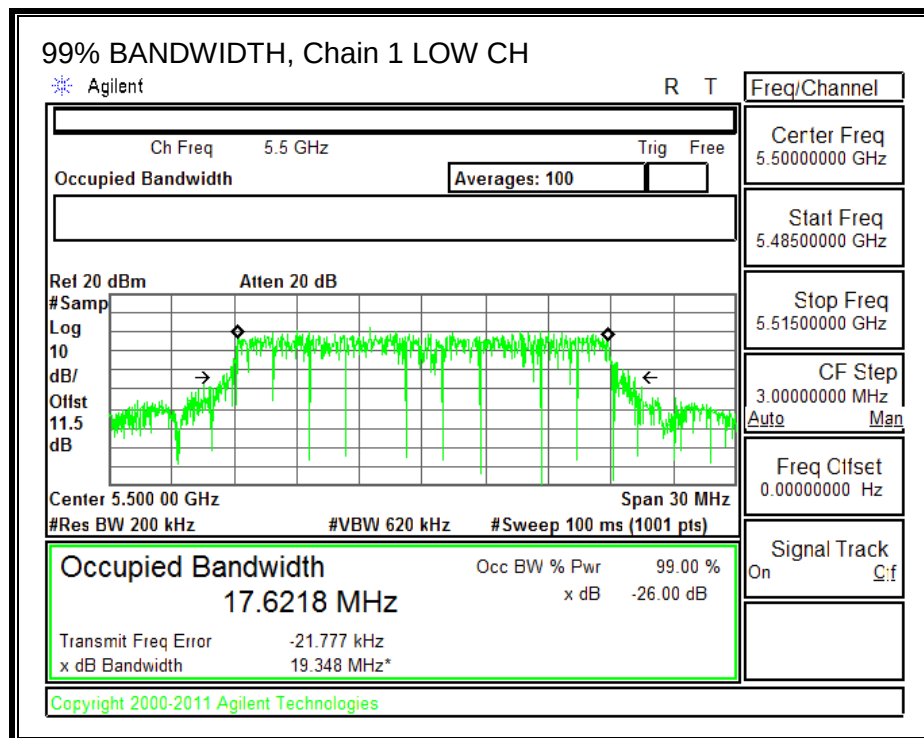

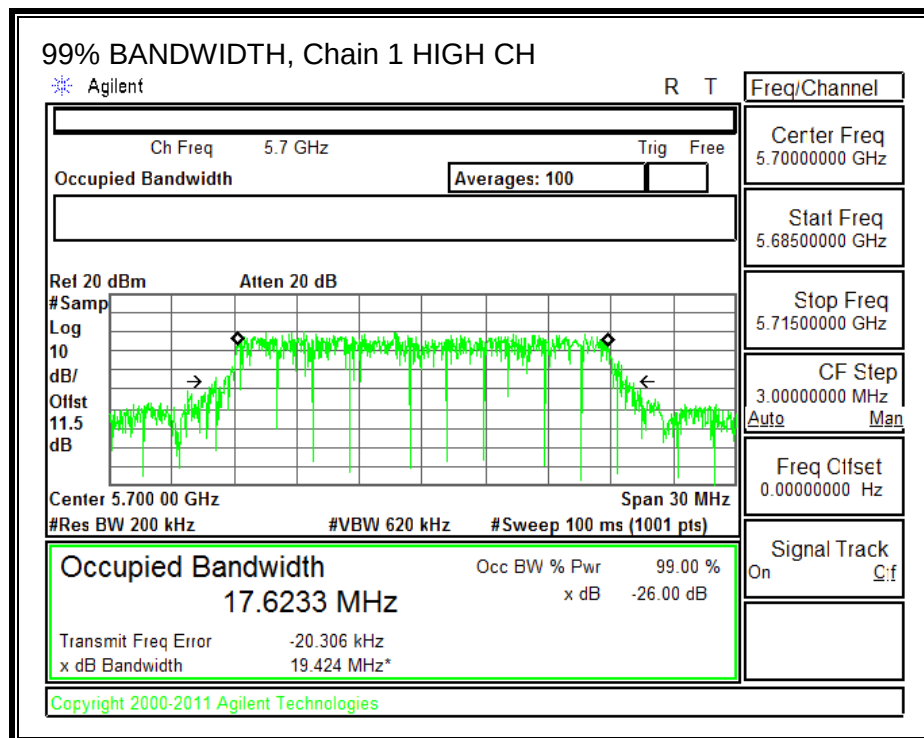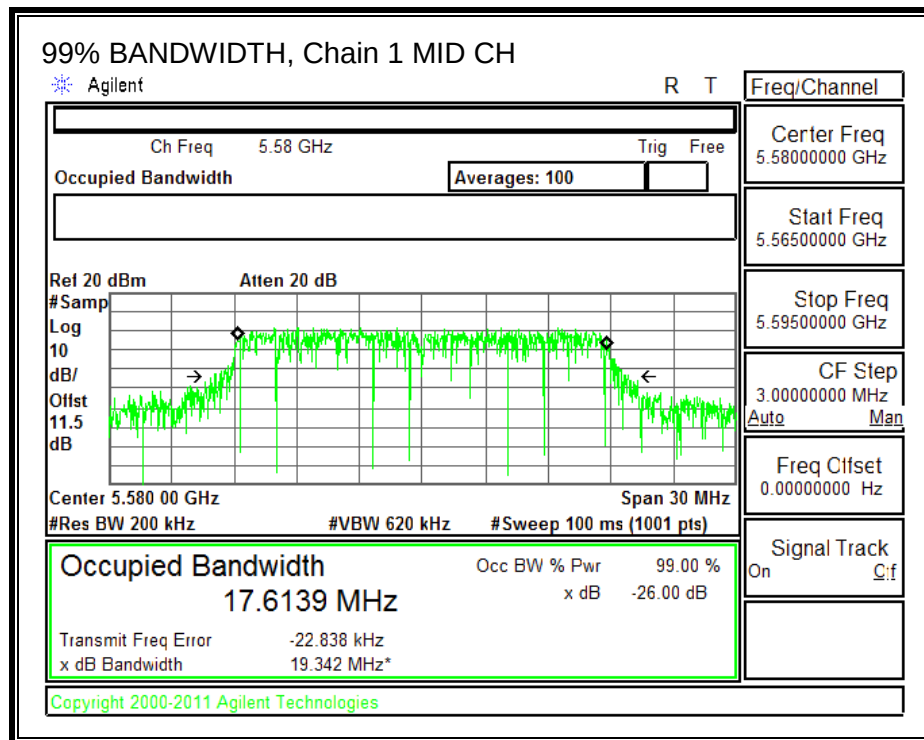

9.13.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter. The power meter was setup for a gated power measurement.

The cable assembly insertion loss of 11.5 dB (including 10 dB pad and 1.5 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

Average Power Results

Channel	Frequency (MHz)	Chain 0 Power (dBm)	Chain 1 Power (dBm)	Total Power (dBm)
Low	5500	13.21	13.33	16.28
Mid	5580	15.32	15.28	18.31
High	5700	12.78	12.75	15.78

9.13.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (1)
NCC LP0002 §4.7.2 (1)

For the band 5.5–5.7 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26–dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

The transmitter output is connected to a power meter. The power meter was setup for a gated power measurement.

The cable assembly insertion loss of 11.5 dB (including 10 dB pad and 1.5 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
2.43	4.29	3.46

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Correlated Chains Directional Gain (dBi)
2.43	4.29	6.42

RESULTS

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Direction Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5500	20.58	3.46	6.42	24.00	10.58
Mid	5600	20.55	3.46	6.42	24.00	10.58
High	5700	20.49	3.46	6.42	24.00	10.58

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--



Output Power Results


Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5500	13.21	13.33	16.28	24.00	-7.72
Mid	5600	15.32	15.28	18.31	24.00	-5.69
High	5700	12.78	12.75	15.78	24.00	-8.22

PSD Results


Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5500	3.24	3.39	6.33	10.58	-4.25
Mid	5600	4.95	5.31	8.14	10.58	-2.44
High	5700	2.29	2.09	5.20	10.58	-5.38



PSD, Chain 0

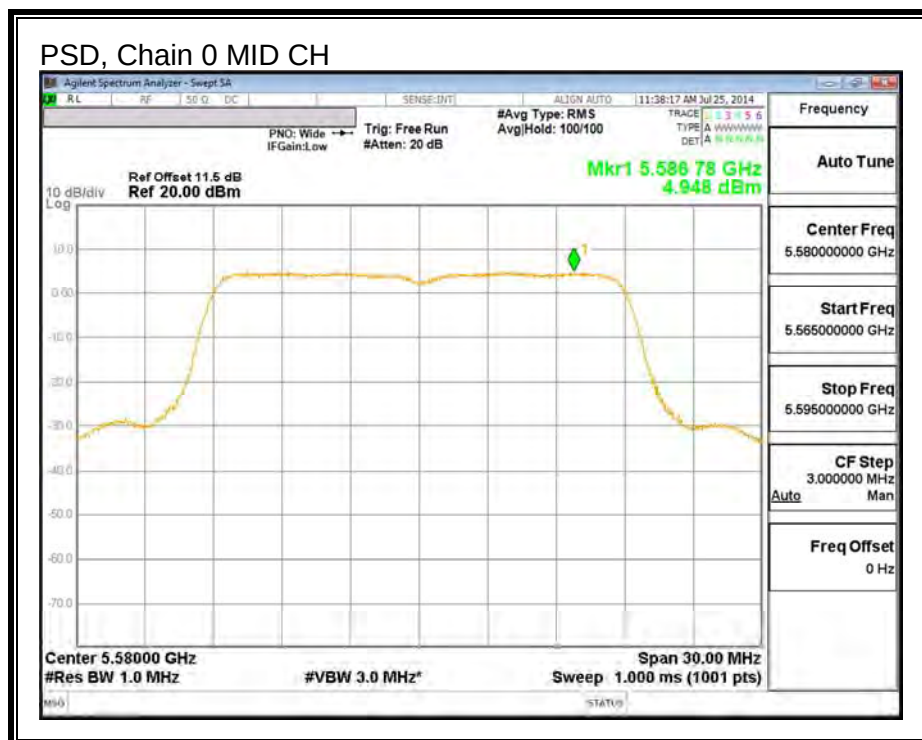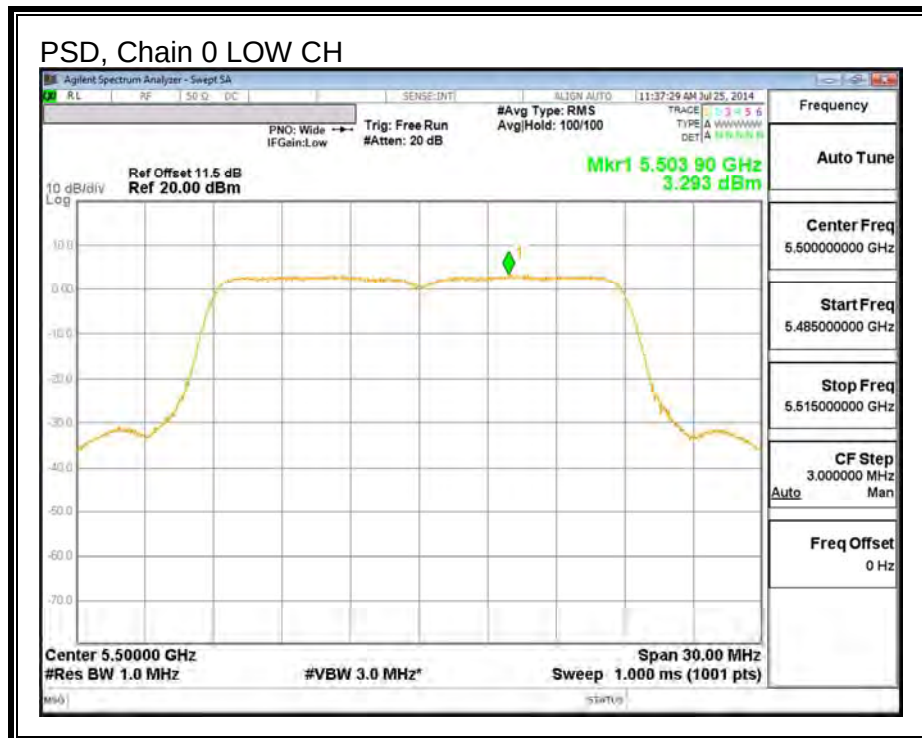

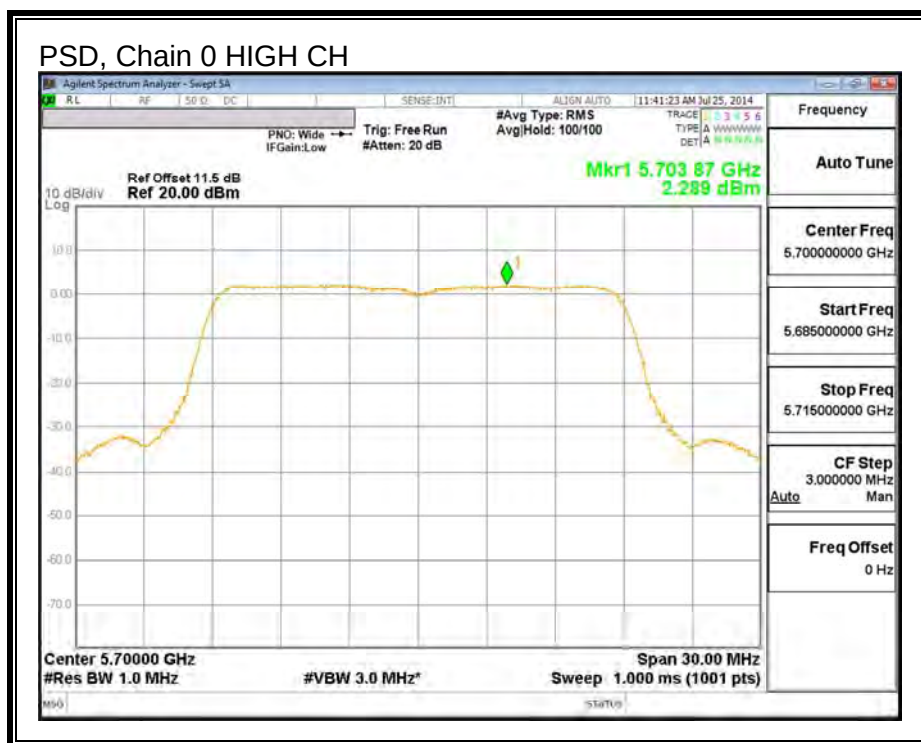

PSD, Chain 1

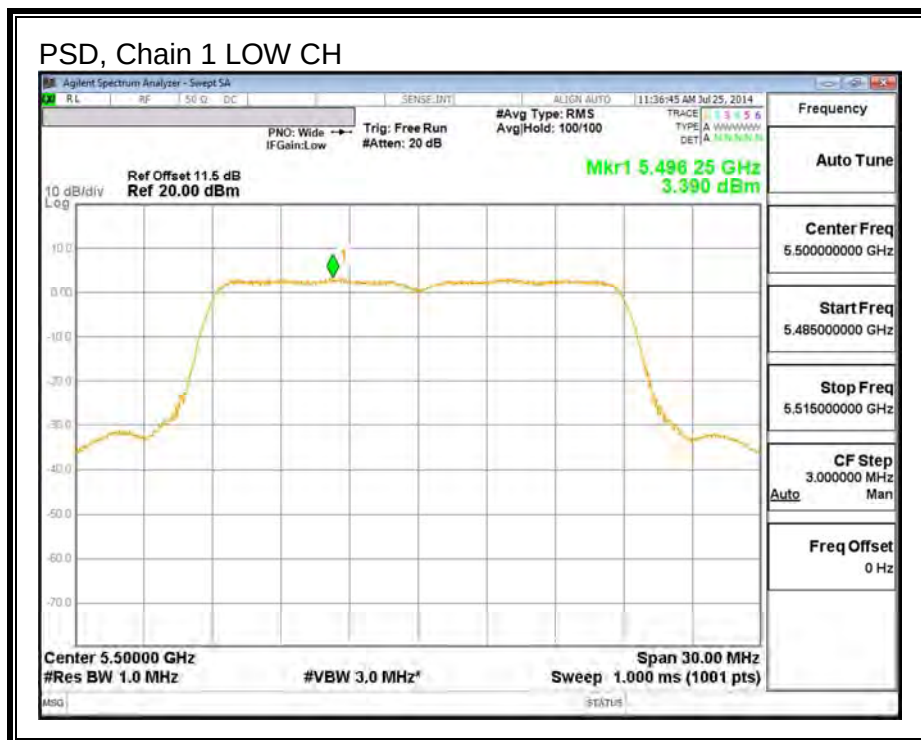

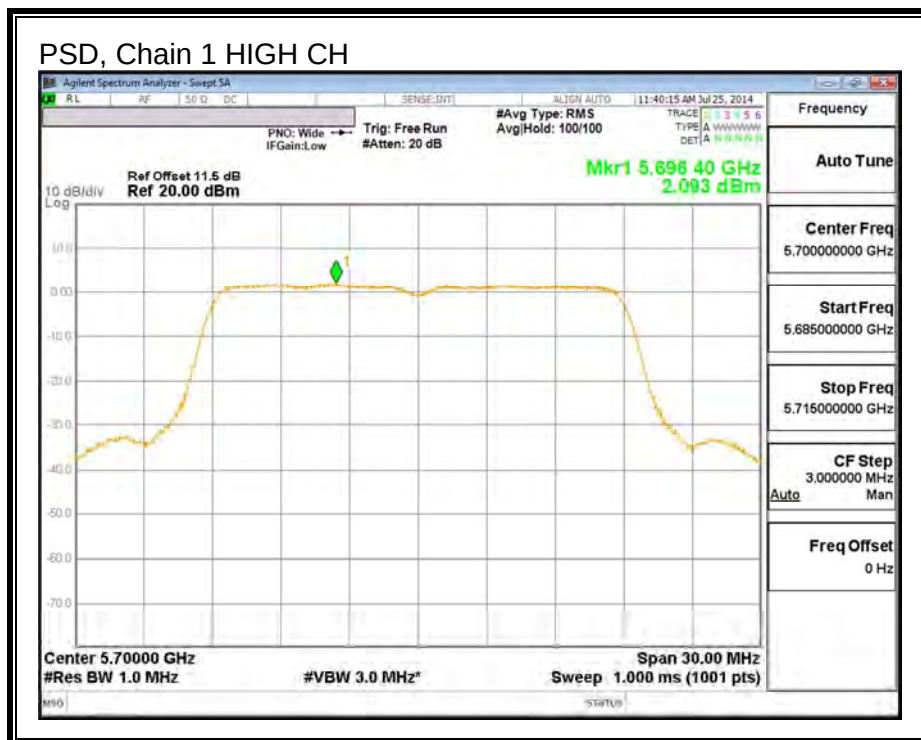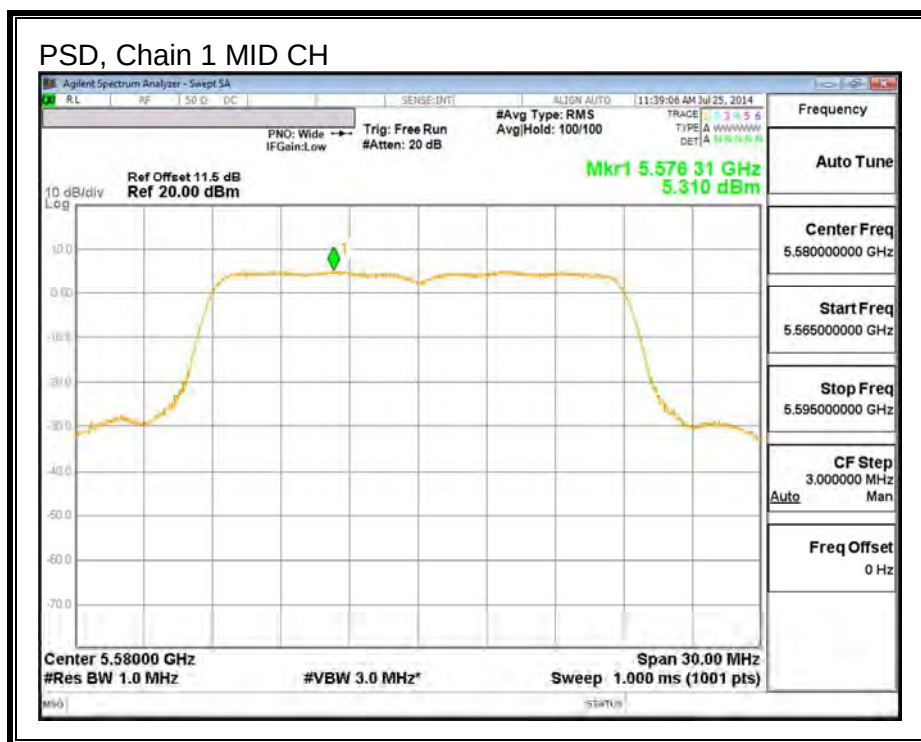

9.14. 802.11n HT40 1Tx MODE IN THE 5.6 GHz BAND

9.14.1. 26 dB BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5510	40.20
Mid	5550	40.20
High	5670	40.26

26 dB BANDWIDTH

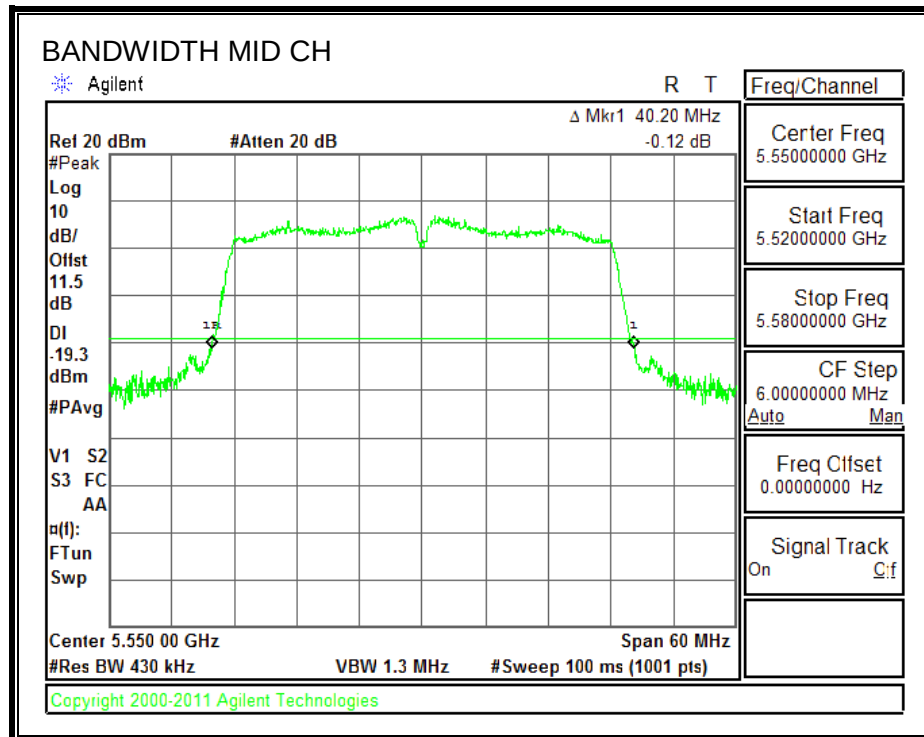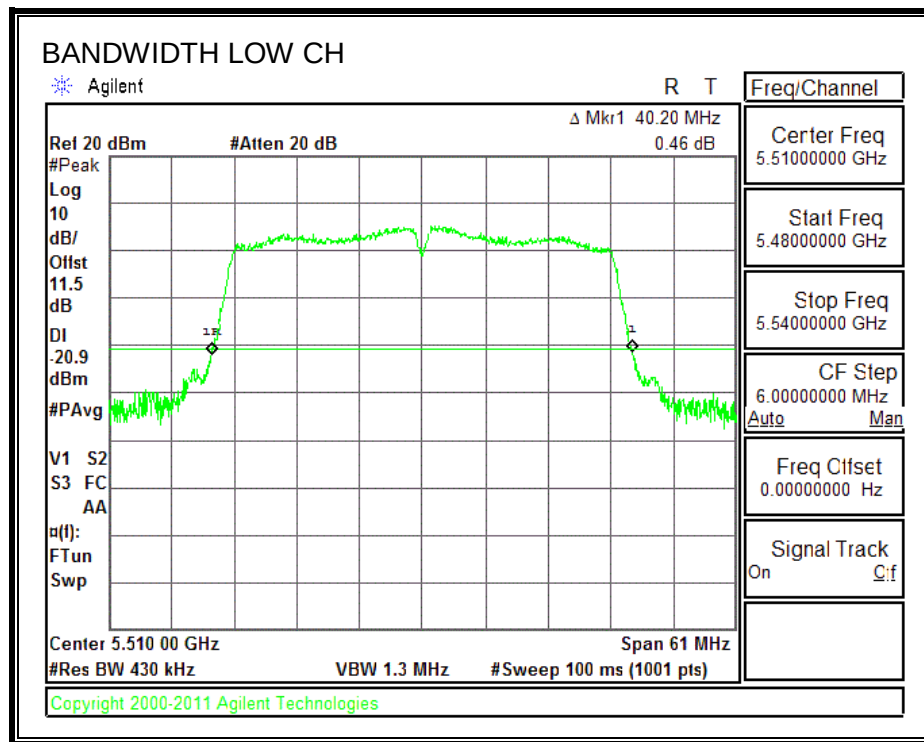

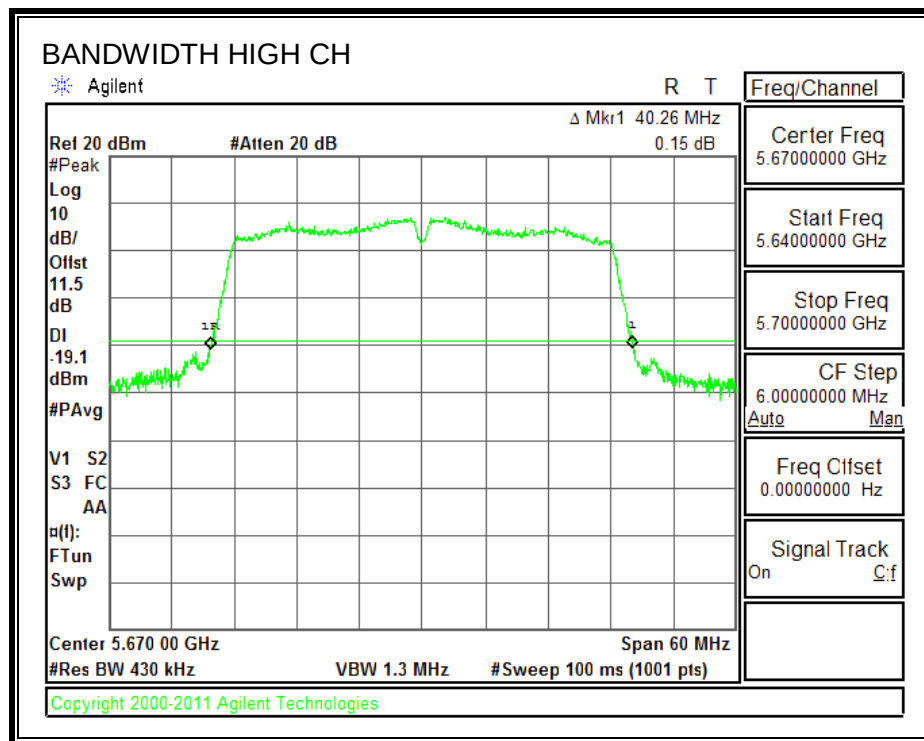

9.14.2. 99% BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5510	36.13
Mid	5550	36.14
High	5670	36.12

99% BANDWIDTH

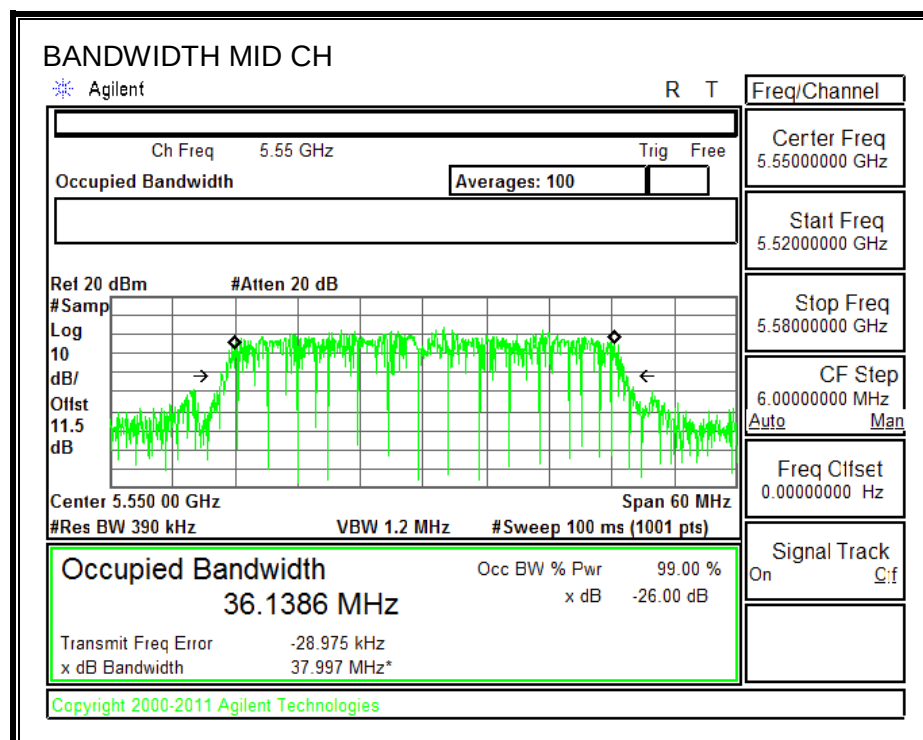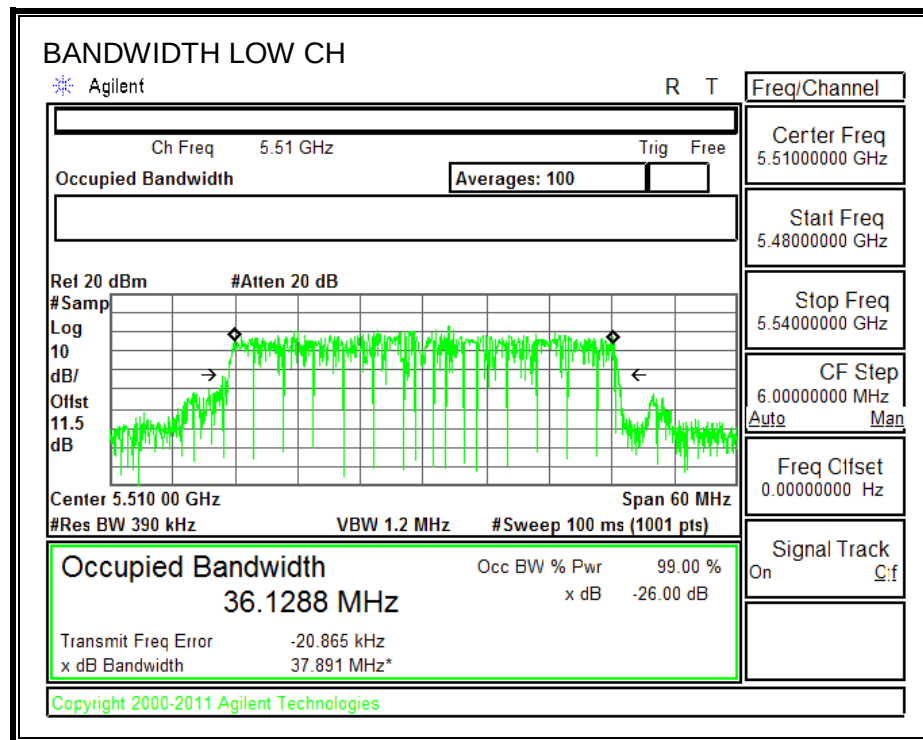

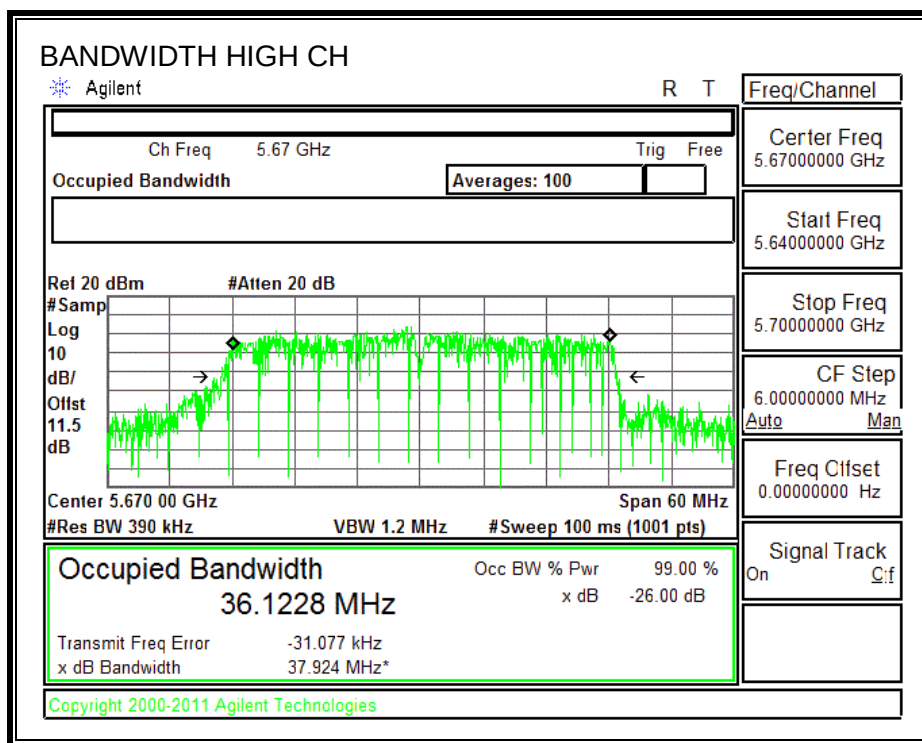

9.14.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter. The power meter was setup for a gated power measurement.

The cable assembly insertion loss of 11.5 dB (including 10 dB pad and 1.5 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

Channel	Frequency (MHz)	Power (dBm)
Low	5510	13.78
Mid	5550	15.33
High	5670	15.24

9.14.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.5–5.7 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26–dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

The transmitter output is connected to a power meter. The power meter was setup for a gated power measurement.

The cable assembly insertion loss of 11.5 dB (including 10 dB pad and 1.5 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

Antenna Gain (dBi)
4.29

RESULTS

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5510	40.20	4.29	24.00	11.00
Mid	5590	40.20	4.29	24.00	11.00
High	5670	40.26	4.29	24.00	11.00

Duty Cycle CF (dB)	0.13	Included in Calculations of Corr'd Power & PSD
--------------------	------	--



Output Power Results


Channel	Frequency (MHz)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5510	13.78	13.91	24.00	-10.09
Mid	5590	15.33	15.46	24.00	-8.54
High	5670	15.24	15.37	24.00	-8.63

PSD Results

Channel	Frequency (MHz)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5510	1.04	1.17	11.00	-9.83
Mid	5590	2.62	2.75	11.00	-8.25
High	5670	2.17	2.30	11.00	-8.70

PSD, Chain 1

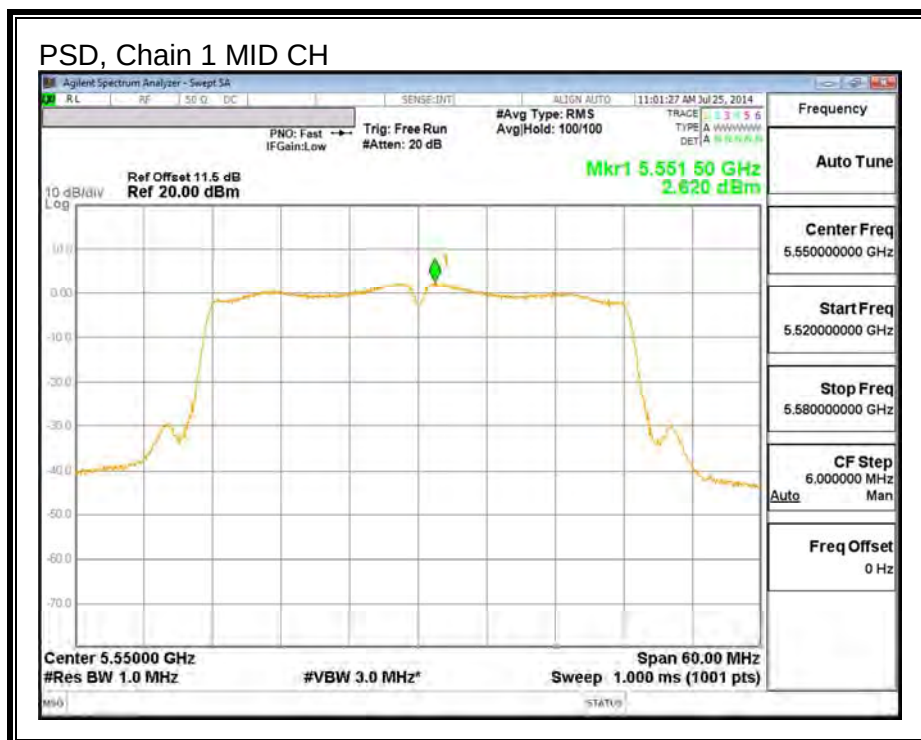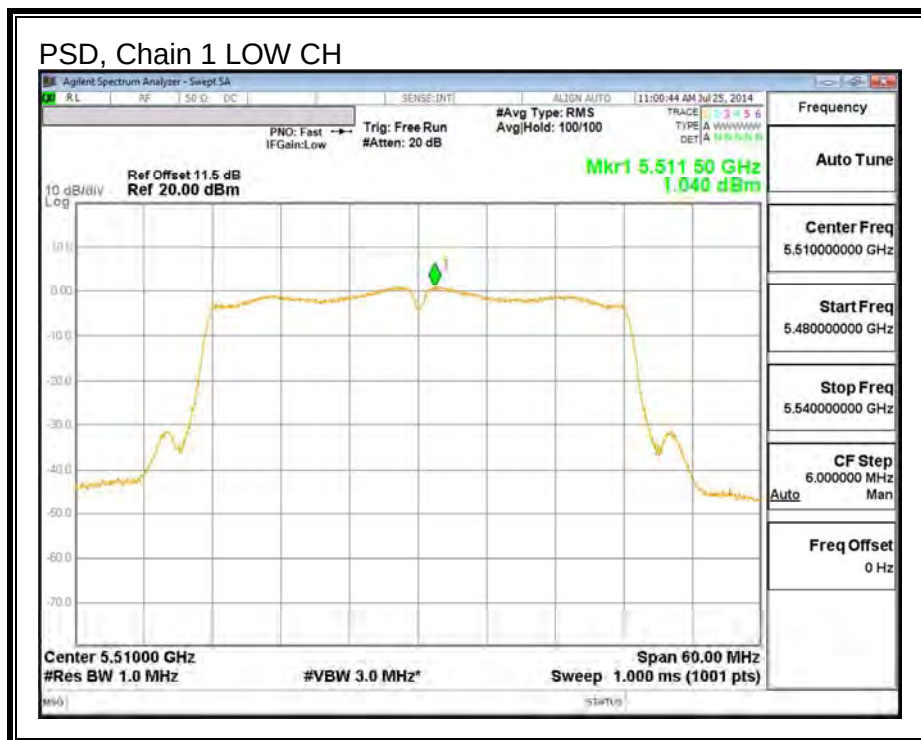

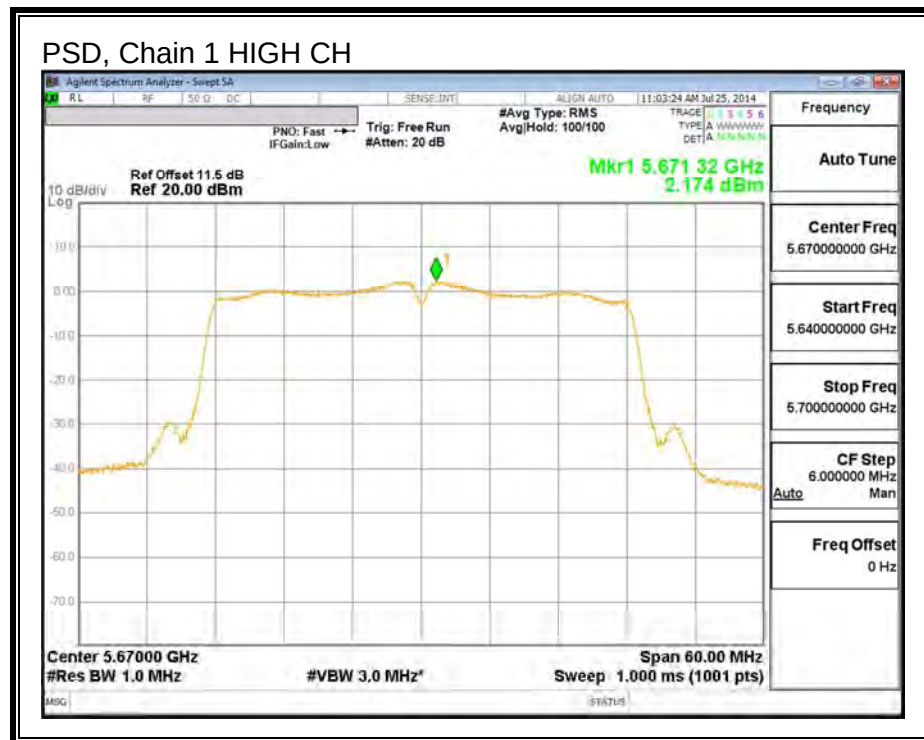

9.15. 802.11n HT40 2Tx CDD MODE IN THE 5.6 GHz BAND

9.15.1. 26 dB BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS


Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)
Low	5510	40.2	39.7
Mid	5550	40.2	39.7
High	5670	40.2	39.7



26 dB BANDWIDTH, Chain 0

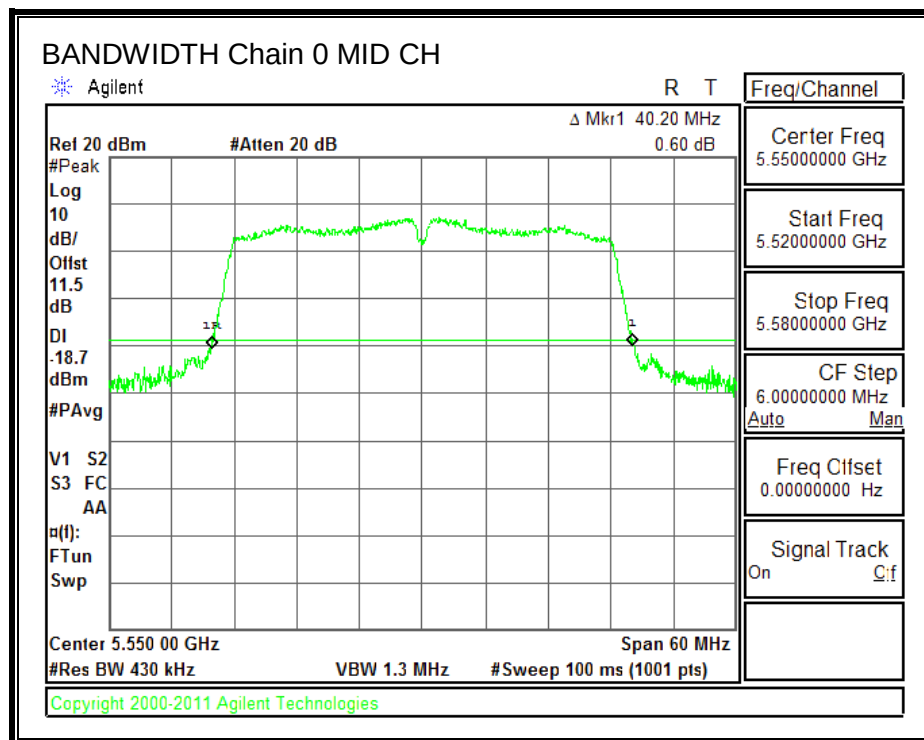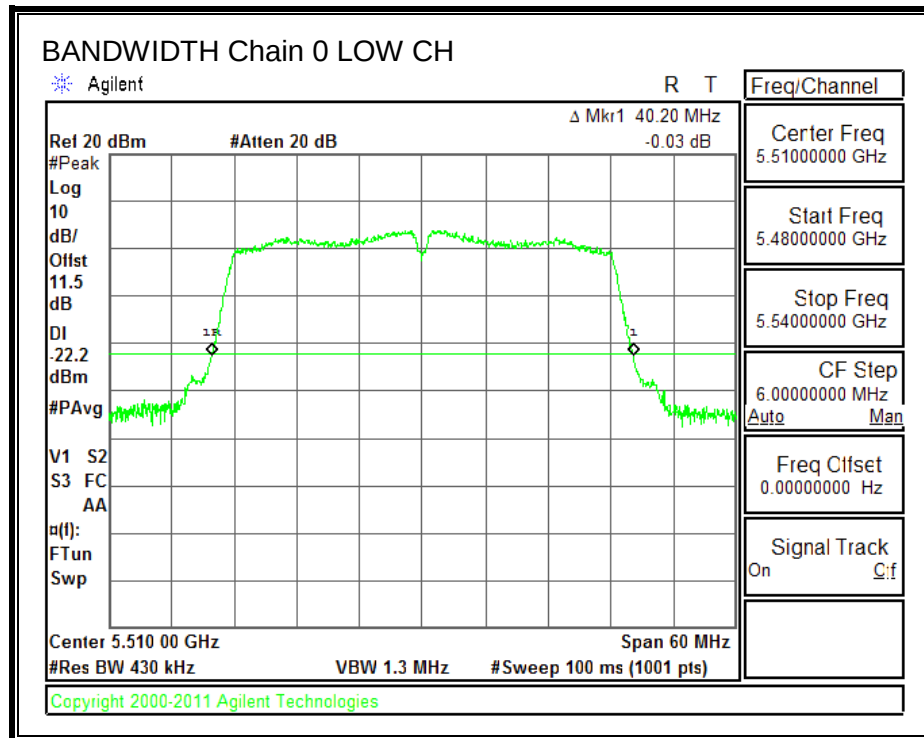

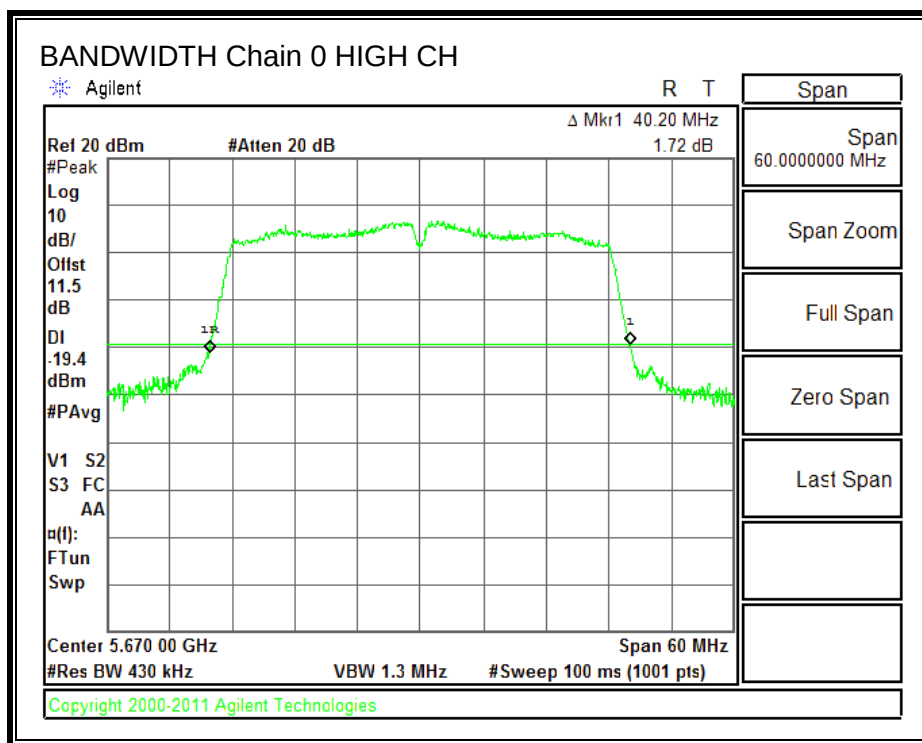

26 dB BANDWIDTH, Chain 1

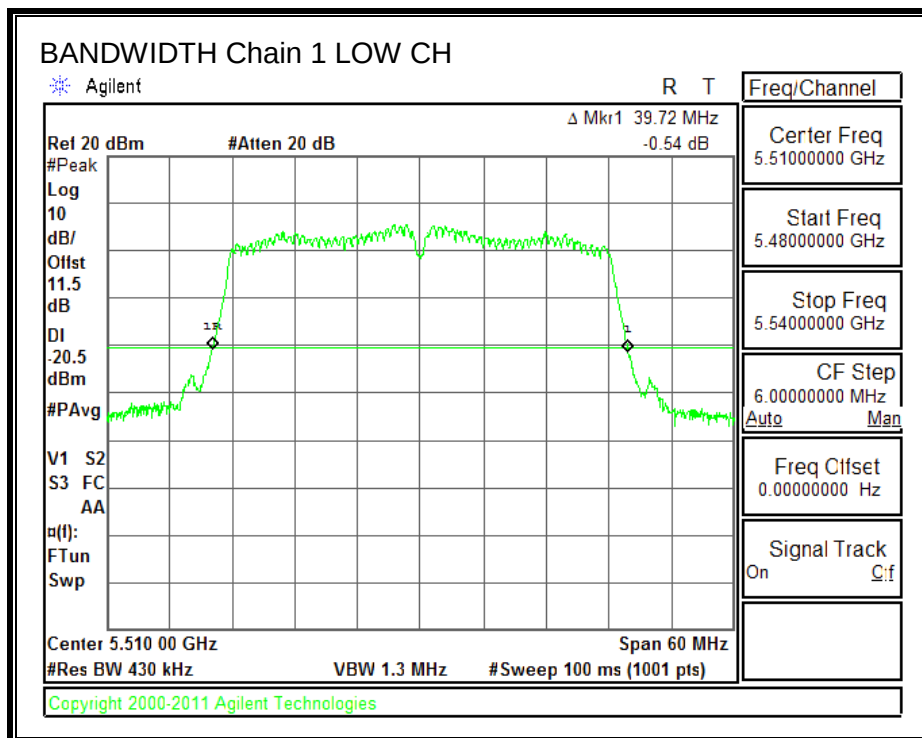

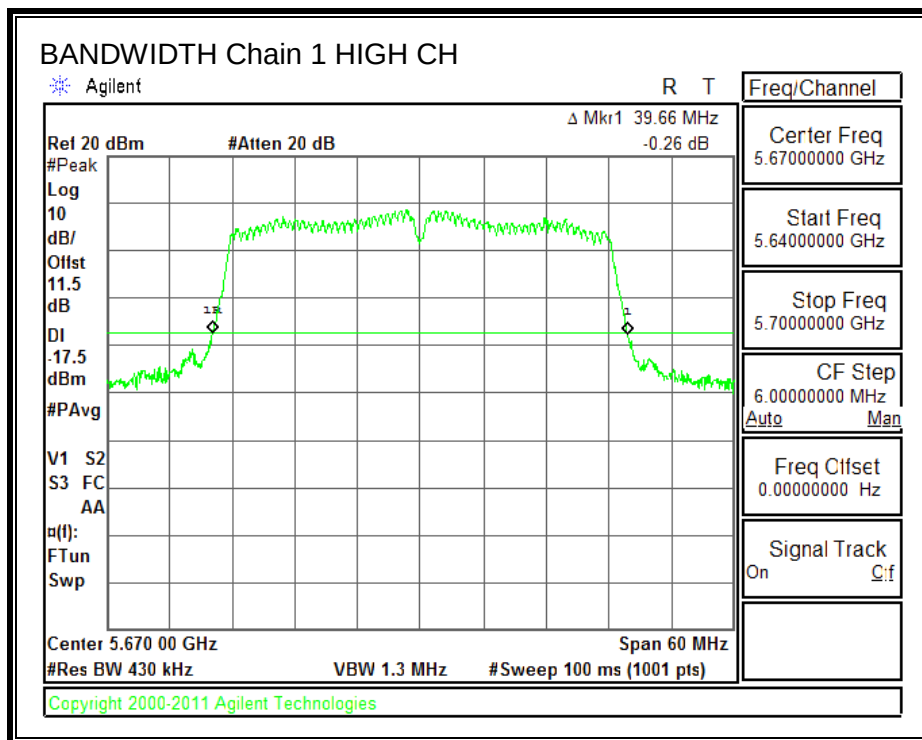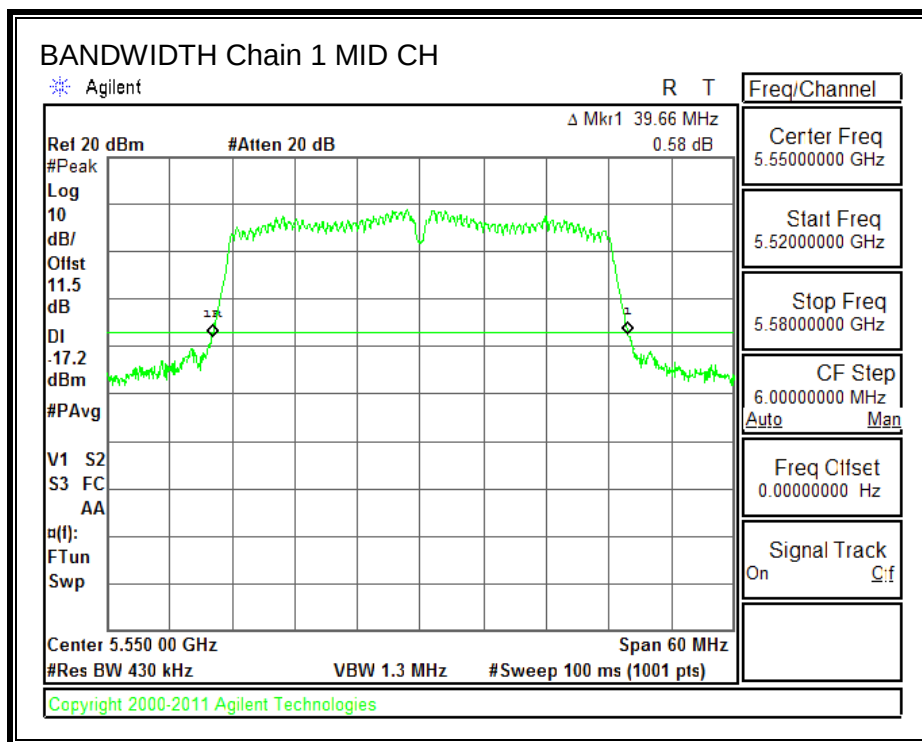

9.15.2. 99% BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS


Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)
Low	5510	36.4	36.3
Mid	5550	36.4	36.4
High	5670	36.4	36.3



99% BANDWIDTH, Chain 0

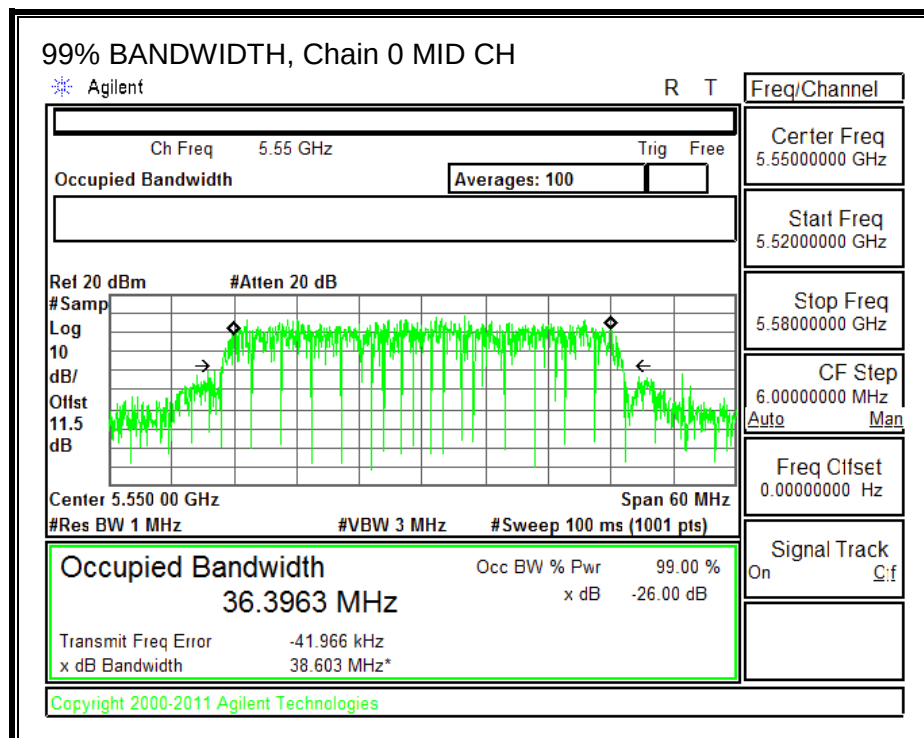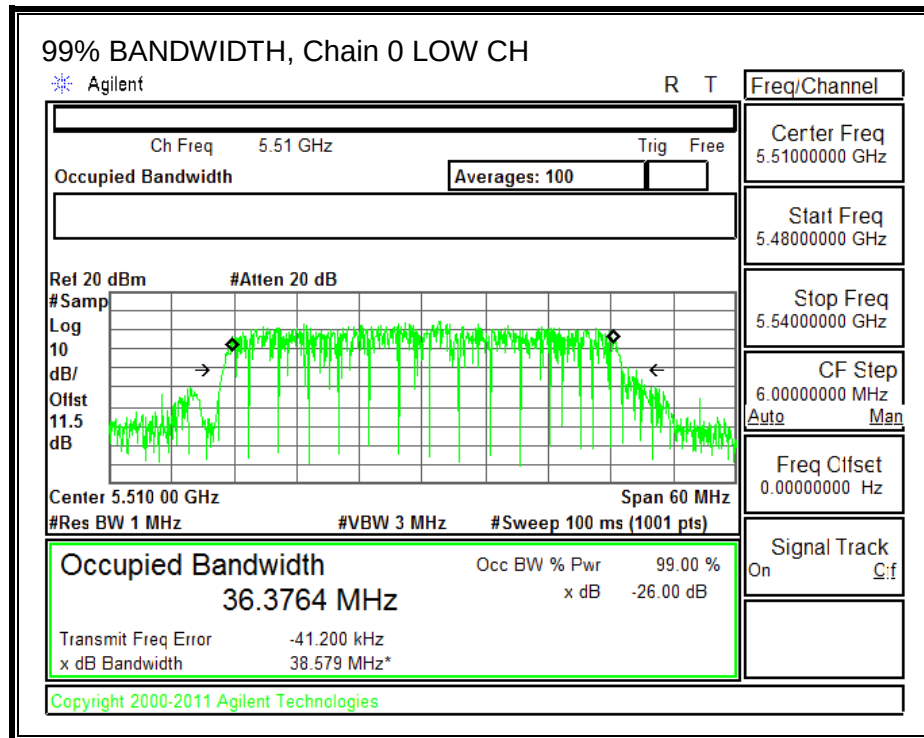

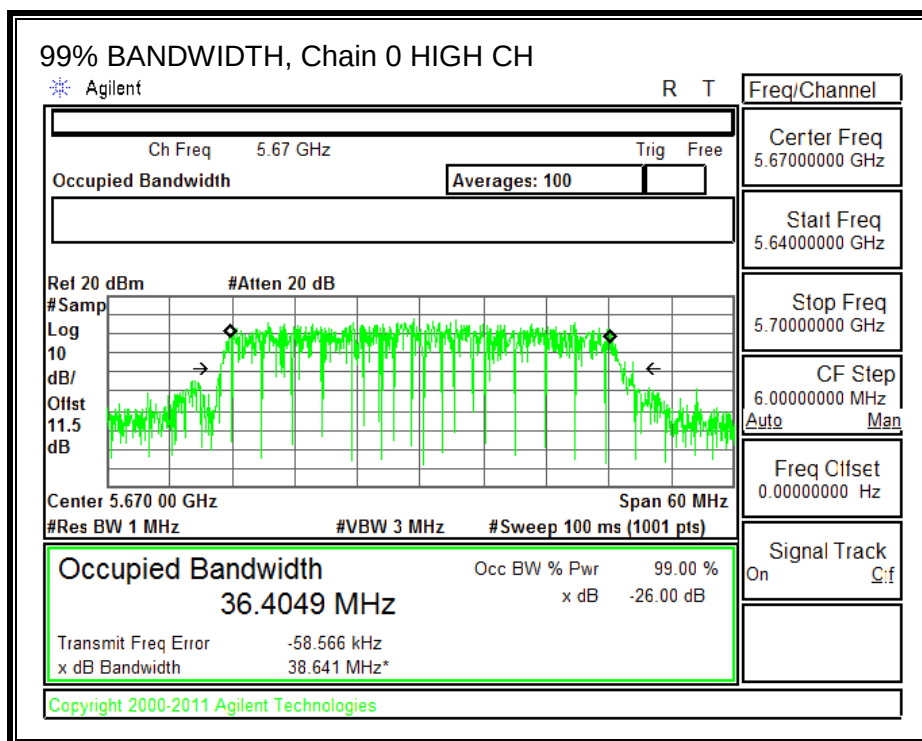

99% BANDWIDTH, Chain 1

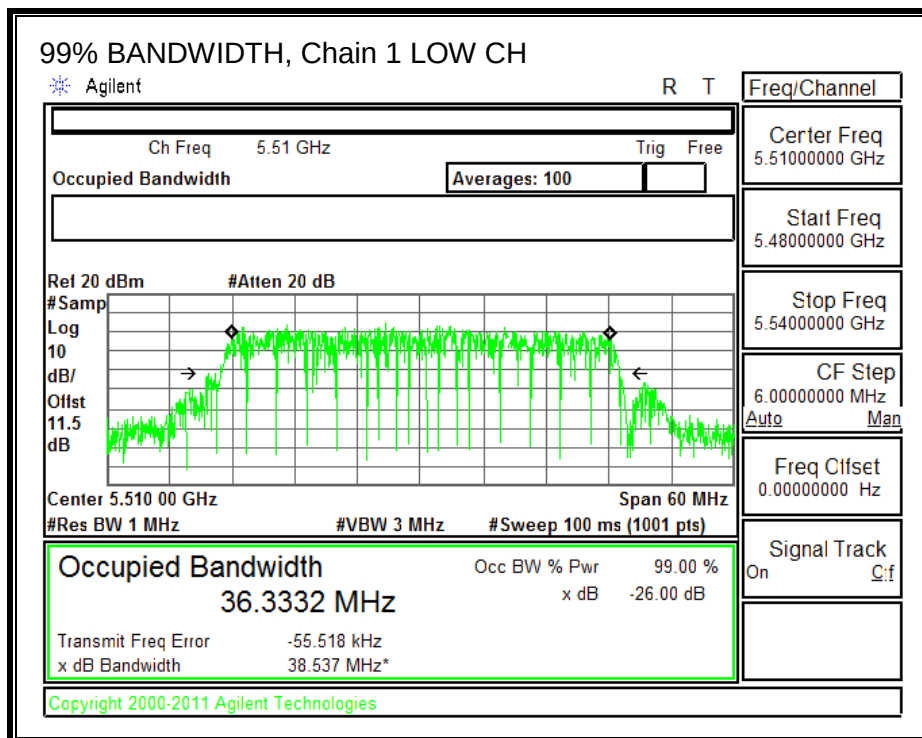

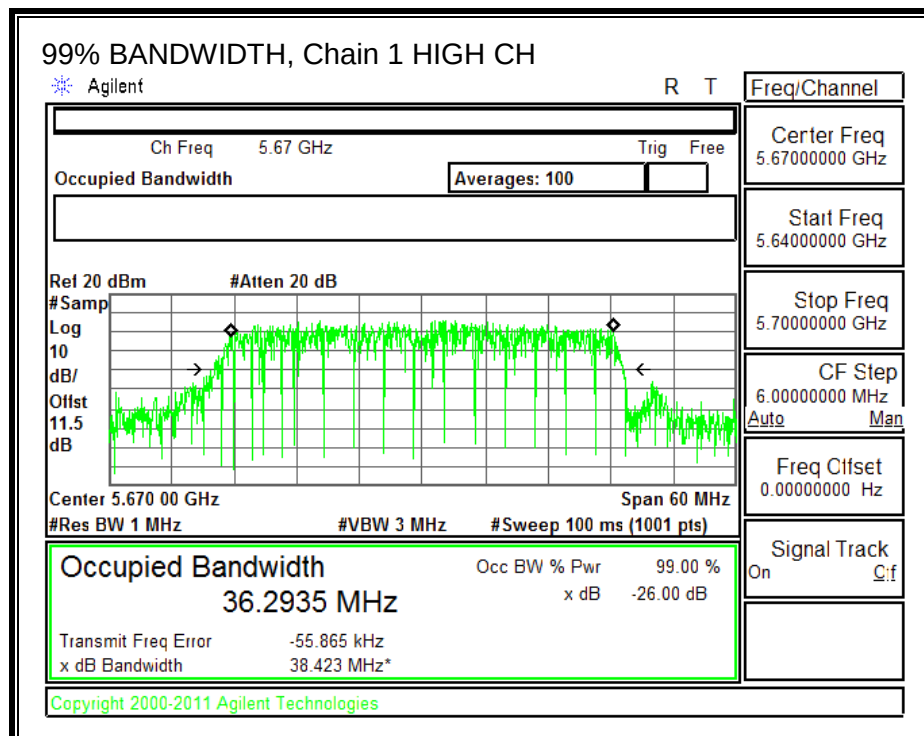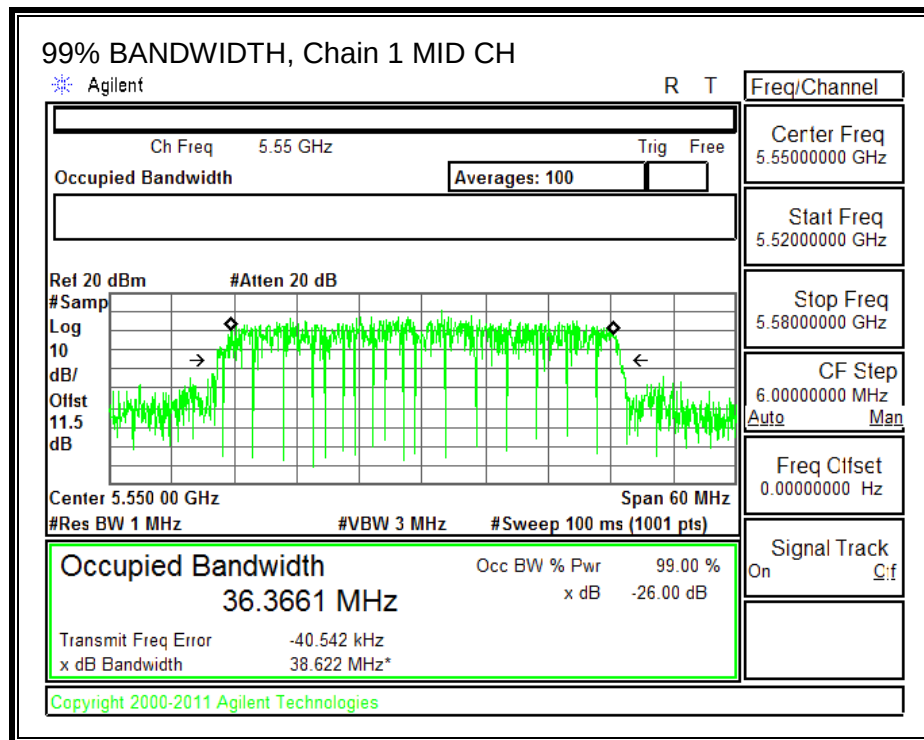

9.15.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter. The power meter was setup for a gated power measurement.

The cable assembly insertion loss of 11.5 dB (including 10 dB pad and 1.5 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

Average Power Results

Channel	Frequency (MHz)	Chain 0 Power (dBm)	Chain 1 Power (dBm)	Total Power (dBm)
Low	5510	11.82	11.73	14.79
Mid	5550	15.35	15.21	18.29
High	5670	14.87	14.78	17.84

9.15.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (1)

For the band 5.5–5.7 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26–dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

The transmitter output is connected to a power meter. The power meter was setup for a gated power measurement.

The cable assembly insertion loss of 11.5 dB (including 10 dB pad and 1.5 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
2.43	4.29	3.46

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Correlated Chains Directional Gain (dBi)
2.43	4.29	6.42

RESULTS

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5510	39.72	3.46	6.42	24.00	10.58
Mid	5590	39.66	3.46	6.42	24.00	10.58
High	5670	39.66	3.46	6.42	24.00	10.58

Duty Cycle CF (dB)	0.13	Included in Calculations of Corr'd Power & PSD
--------------------	------	--



Output Power Results


Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5510	11.82	11.73	14.92	24.00	-9.08
Mid	5590	15.35	15.21	18.42	24.00	-5.58
High	5670	14.87	14.78	17.97	24.00	-6.03

PSD Results


Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5510	-0.15	-0.37	2.89	10.58	-7.69
Mid	5590	2.62	2.87	5.89	10.58	-4.69
High	5670	2.39	2.37	5.52	10.58	-5.06



PSD, Chain 0

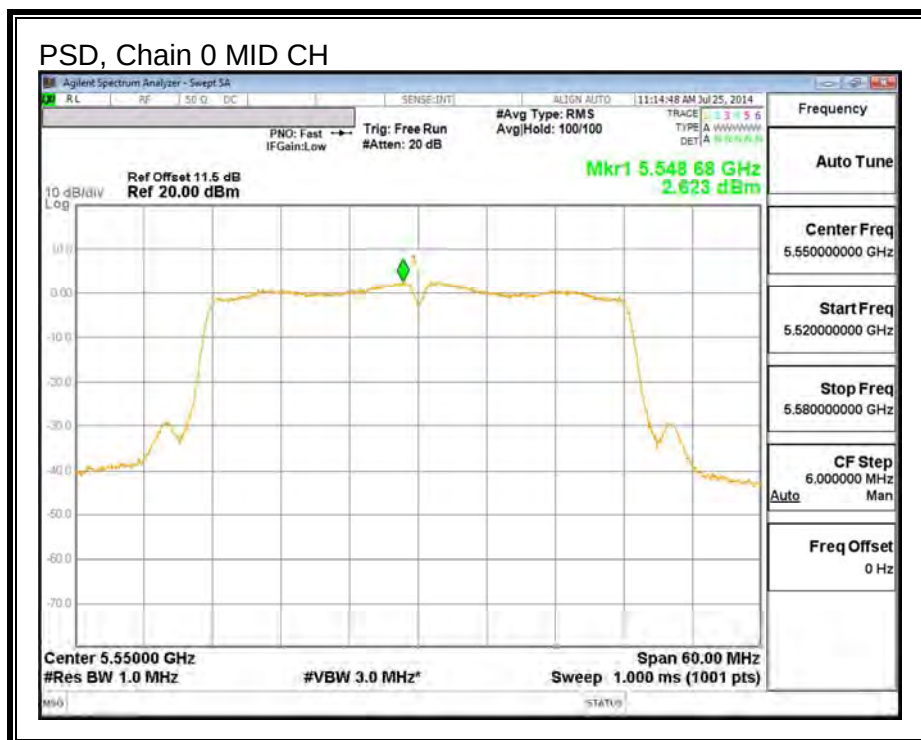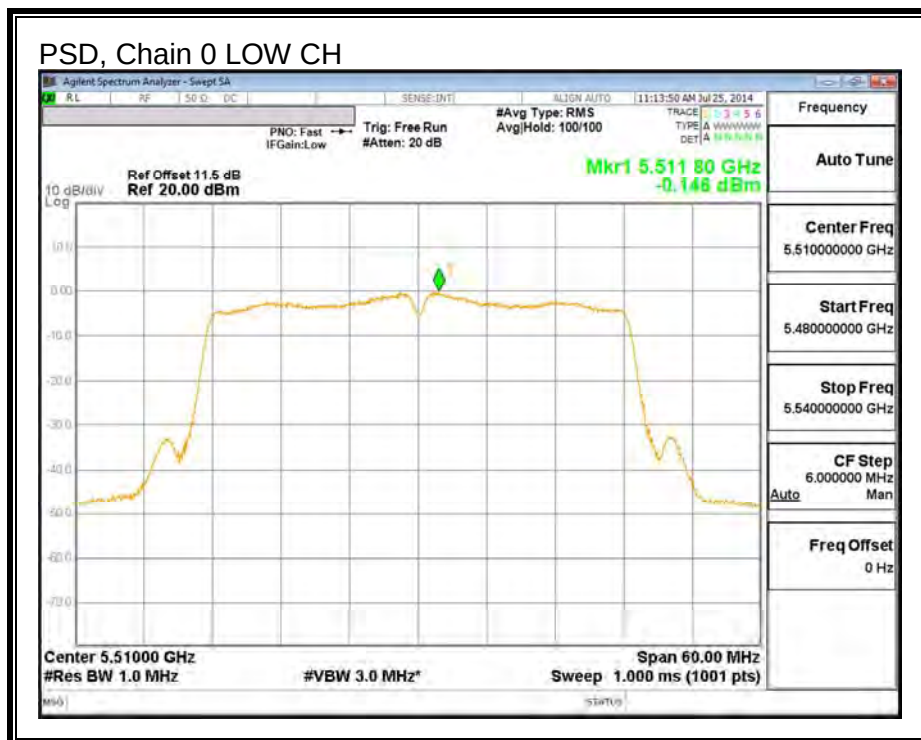

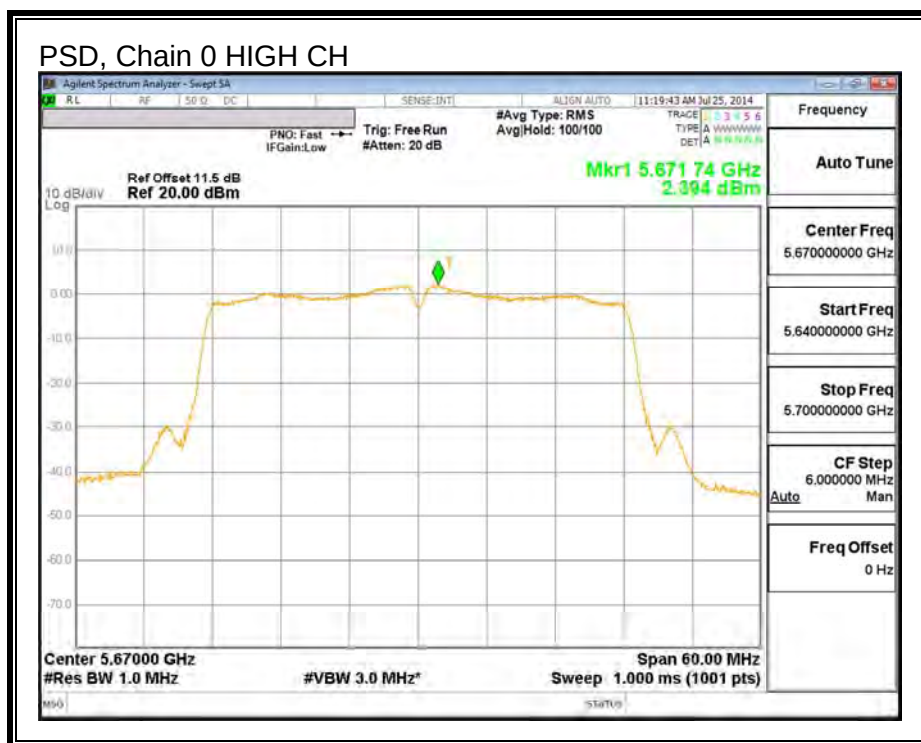

PSD, Chain 1

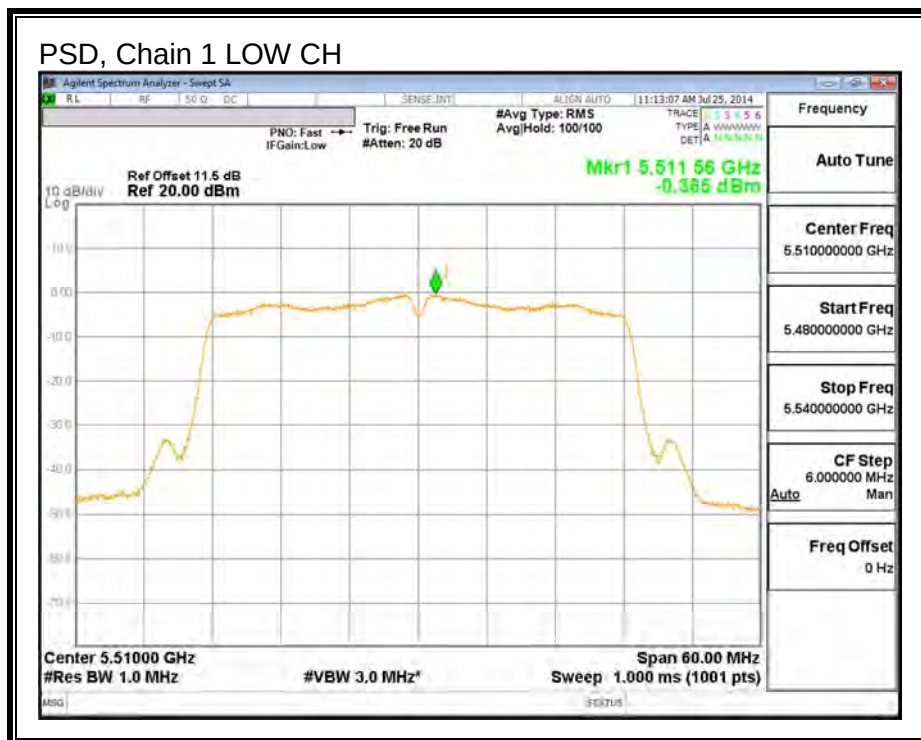

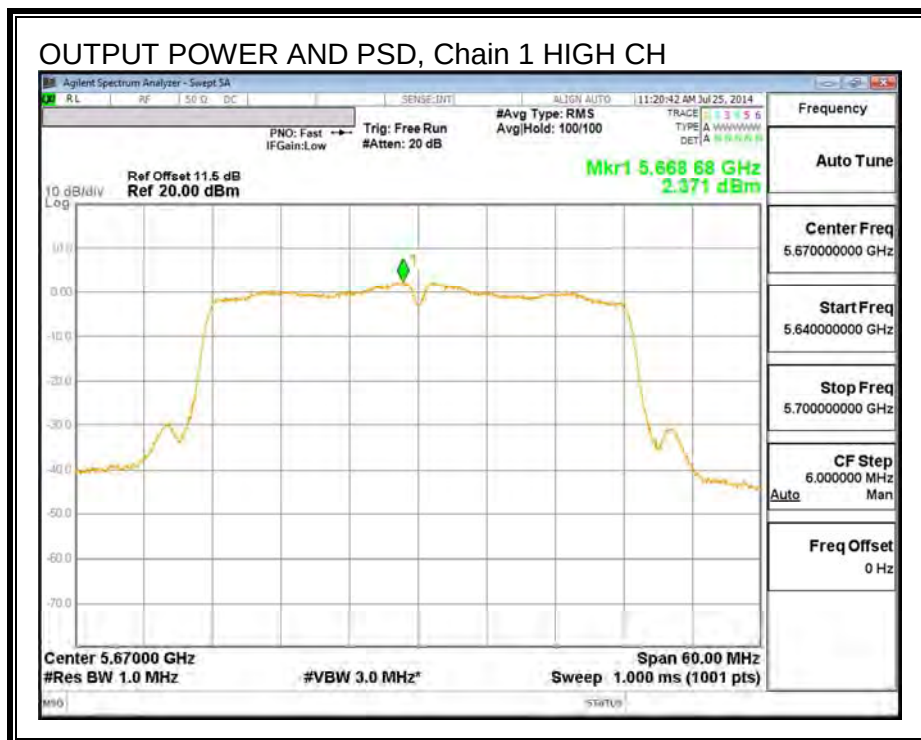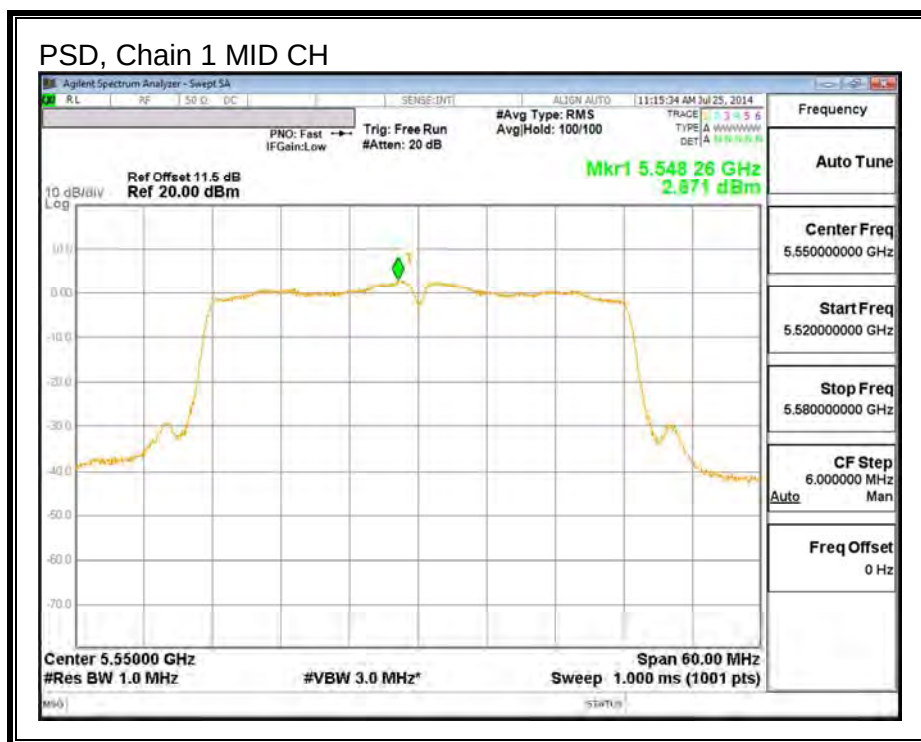

9.16. 802.11a MODE IN THE 5.8 GHz BAND

9.16.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)



IC RSS-210 A8.2 (a)


The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	5745	16.450	0.5
Mid	5785	16.475	0.5
High	5825	16.425	0.5

6 dB BANDWIDTH

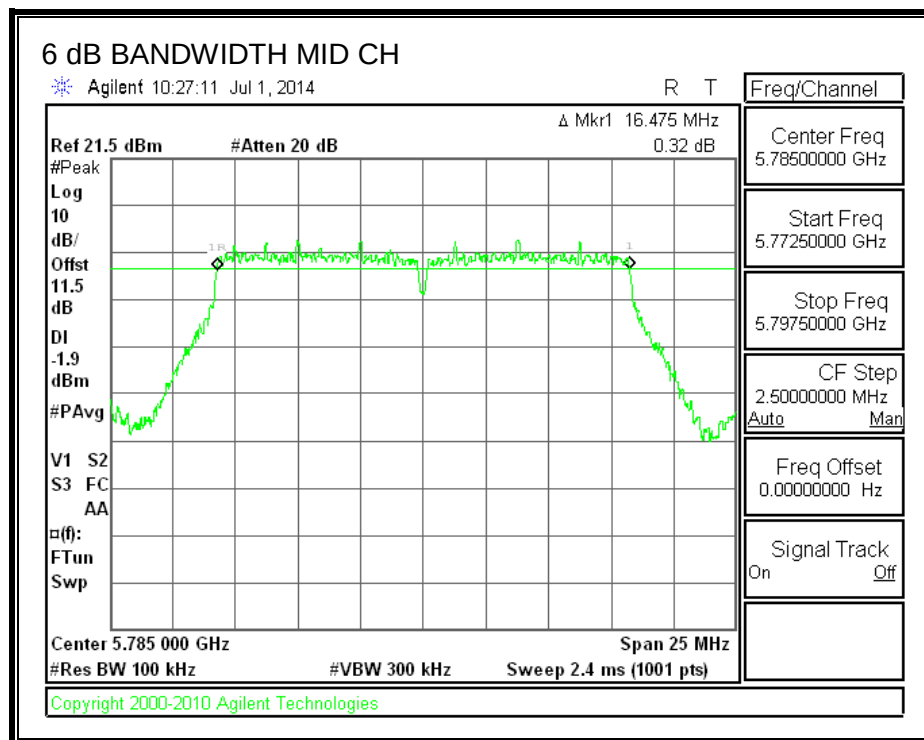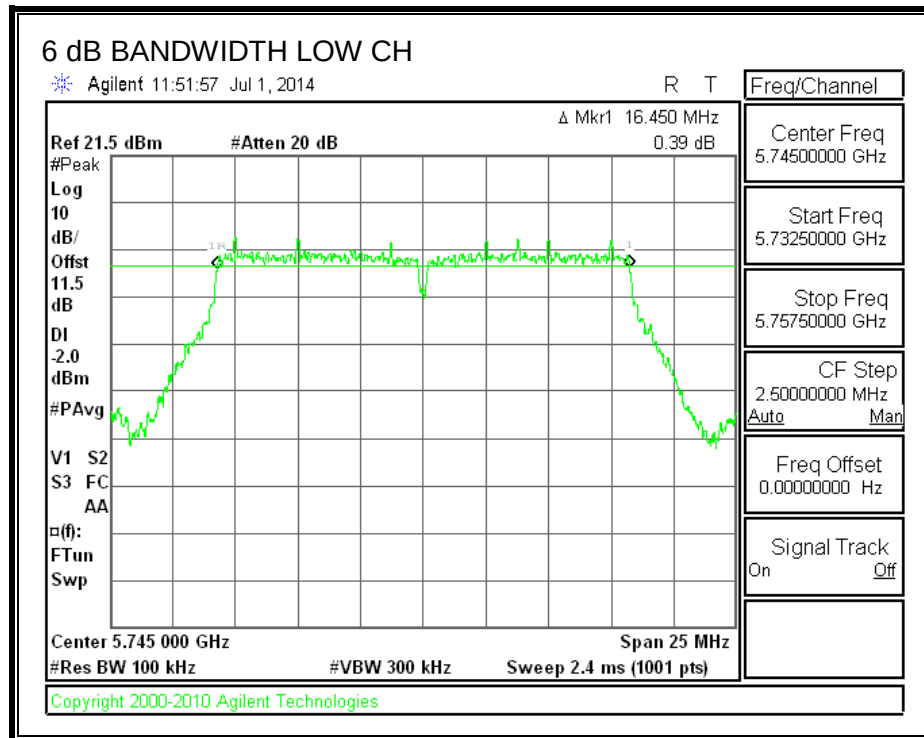

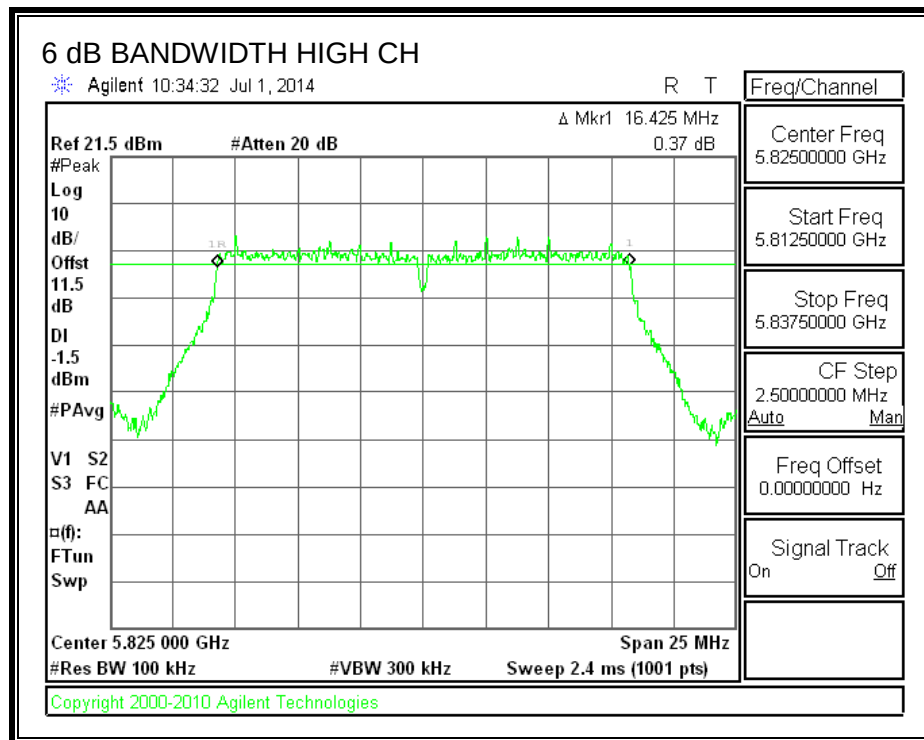

9.16.2. 26 dB BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5745	20.3
Mid	5785	20.3
High	5825	20.4

26 dB BANDWIDTH

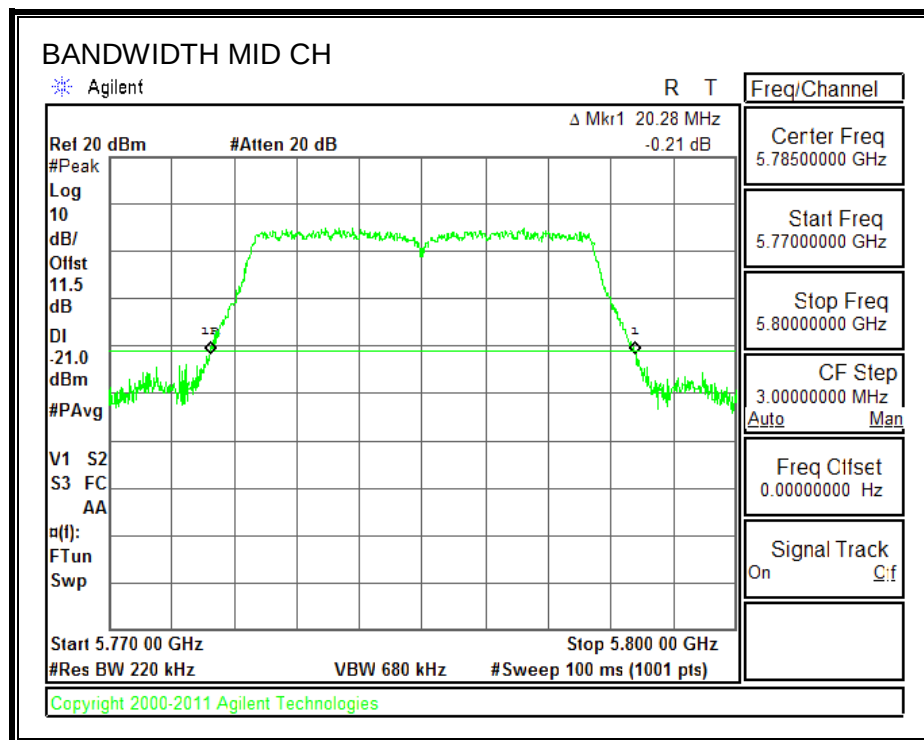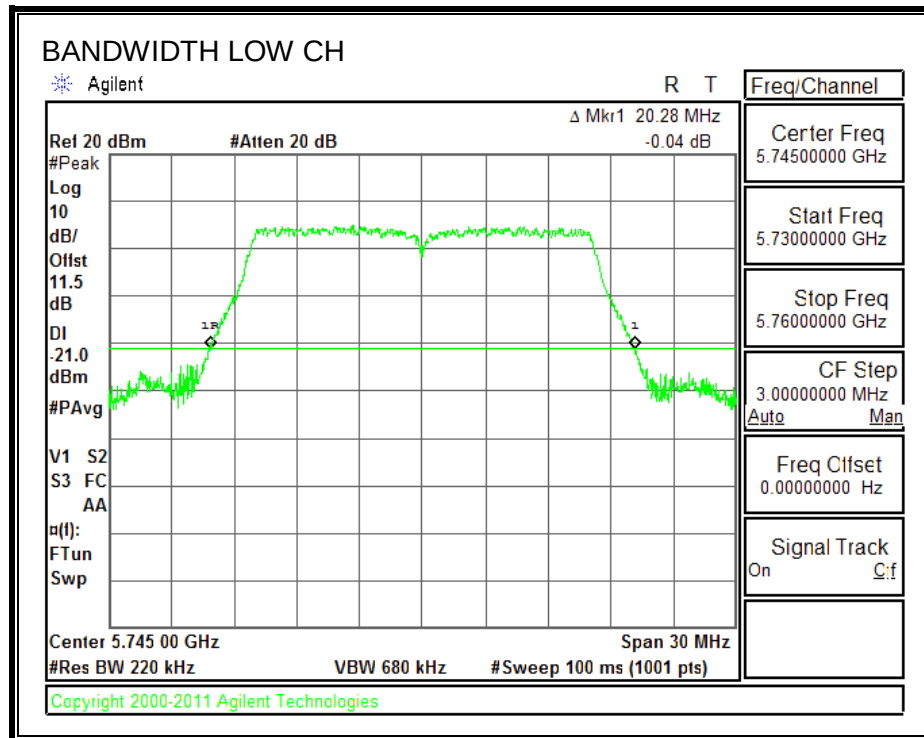

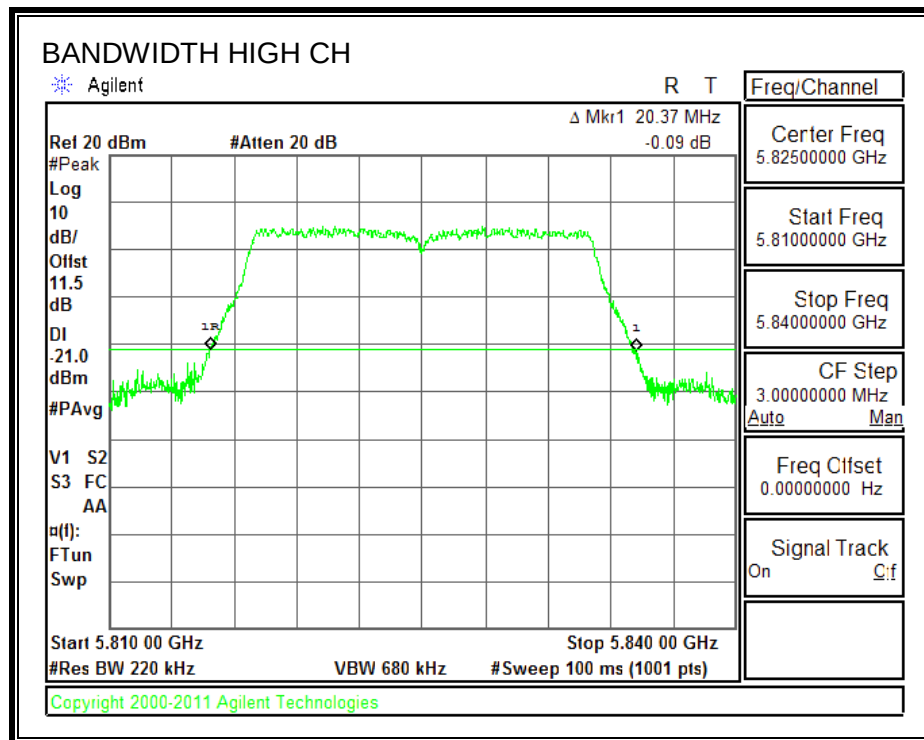

9.16.3. 99% BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5745	16.46
Mid	5785	16.47
High	5825	16.46

99% BANDWIDTH

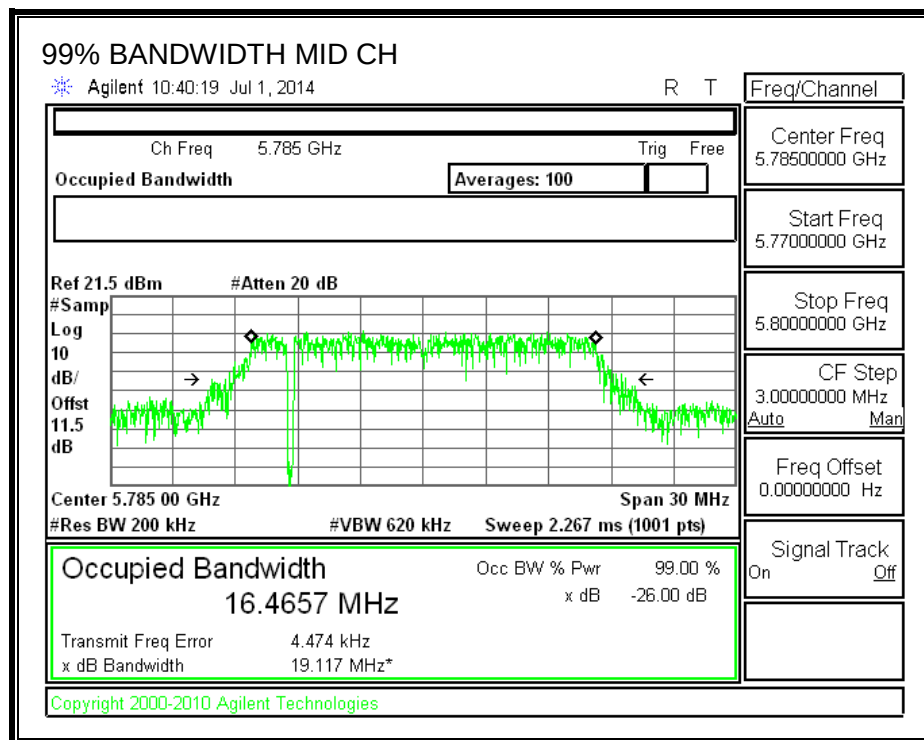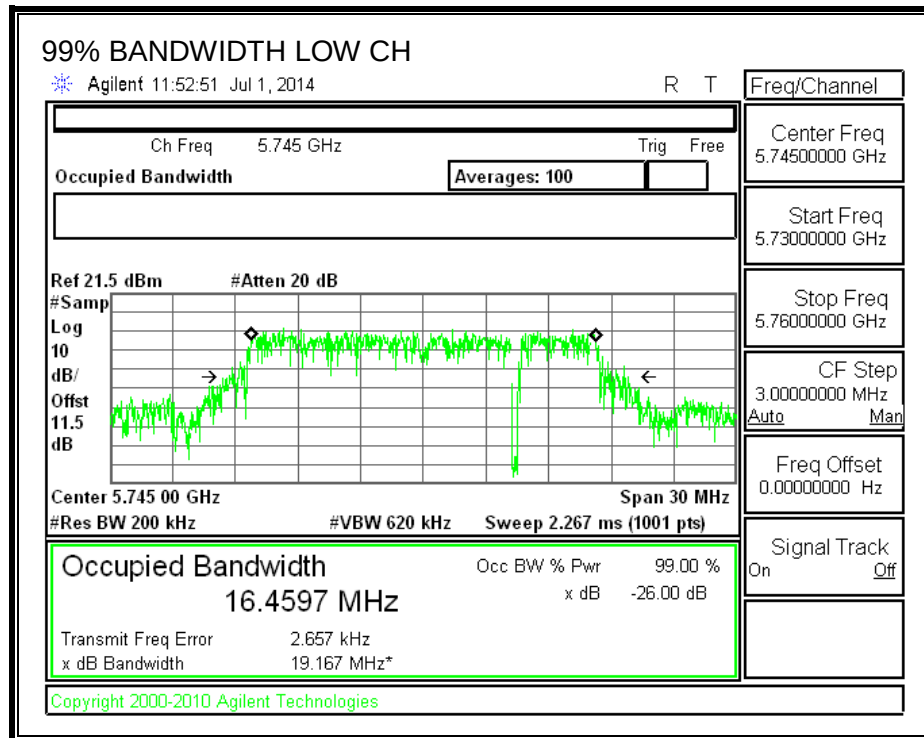

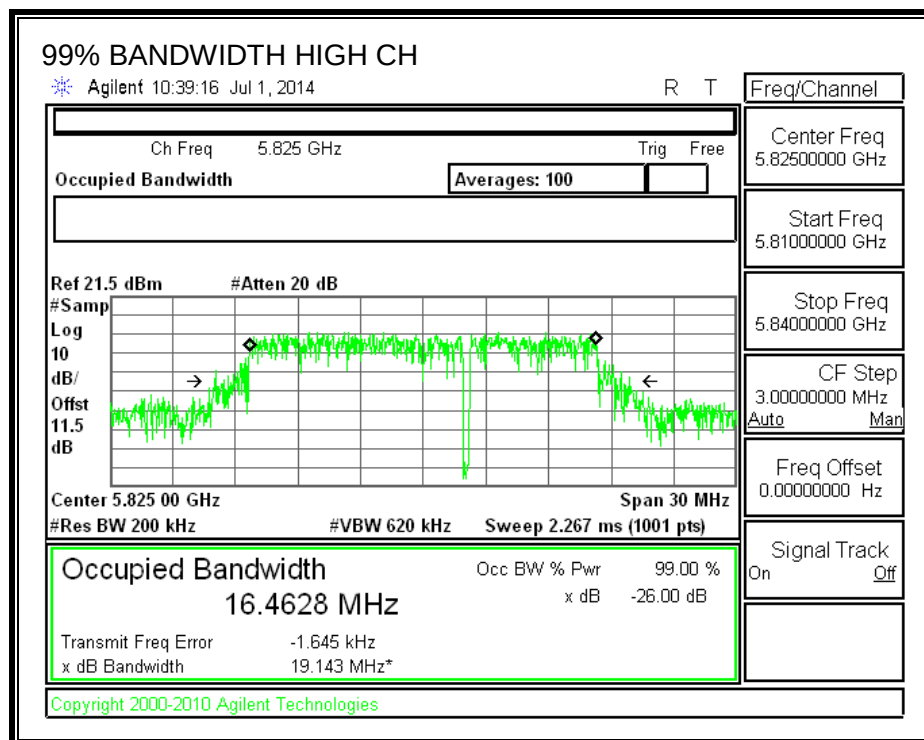

9.16.4. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter. The power meter was setup for a gated power measurement.

The cable assembly insertion loss of 11.5 dB (including 10 dB pad and 1.5 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

Channel	Frequency (MHz)	Power (dBm)
Low	5745	14.77
Mid	5785	15.32
High	5825	15.24

9.16.5. OUTPUT POWER

LIMITS

FCC §15.407 (a) (3)

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

The transmitter output is connected to a power meter. The power meter was setup for a gated power measurement.

The cable assembly insertion loss of 11.5 dB (including 10 dB pad and 1.5 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

Antenna Gain (dBi)
3.76

RESULTS

Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Power Limit (dBm)
Low	5745	3.76	30.00
Mid	5785	3.76	30.00
High	5825	3.76	30.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5745	14.77	14.77	30.00	-15.23
Mid	5785	15.32	15.32	30.00	-14.68
High	5825	15.24	15.24	30.00	-14.76

9.16.6. MAXIMUM POWER SPECTRAL DENSITY (PSD)

LIMITS

FCC §15.407 (a) (3)

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Antenna Gain and Limits



Channel	Frequency (MHz)	Directional Gain (dBi)	PSD Limit (dBm)
Low	5745	3.76	30.00
Mid	5785	3.76	30.00
High	5825	3.76	30.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

PSD Results

Channel	Frequency (MHz)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5745	9.15	9.15	30.00	-20.85
Mid	5785	8.83	8.83	30.00	-21.17
High	5825	9.35	9.35	30.00	-20.65

PSD, Chain 1

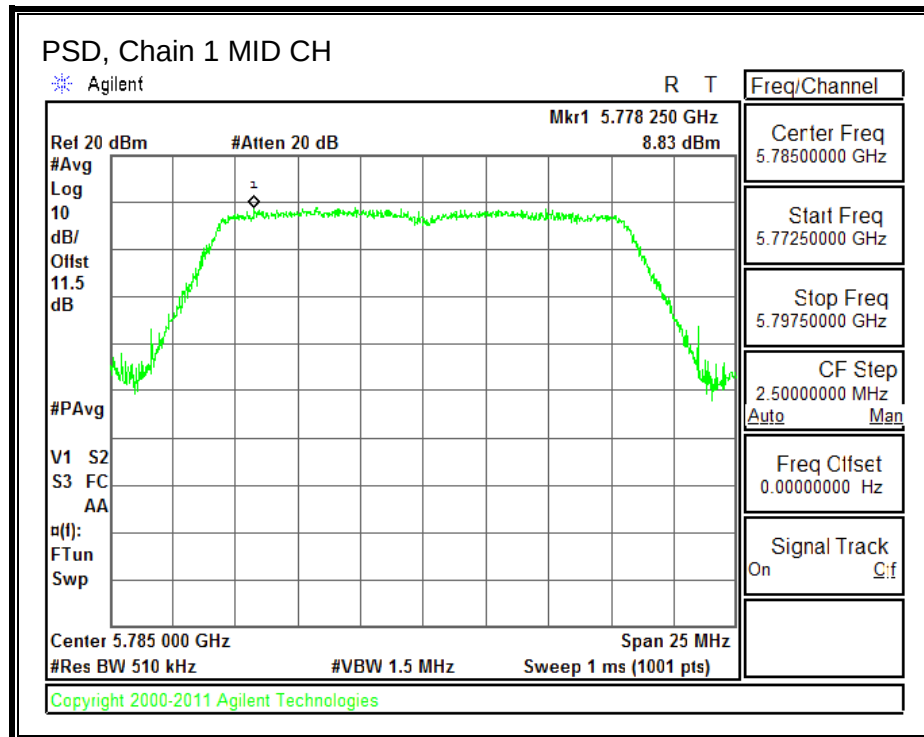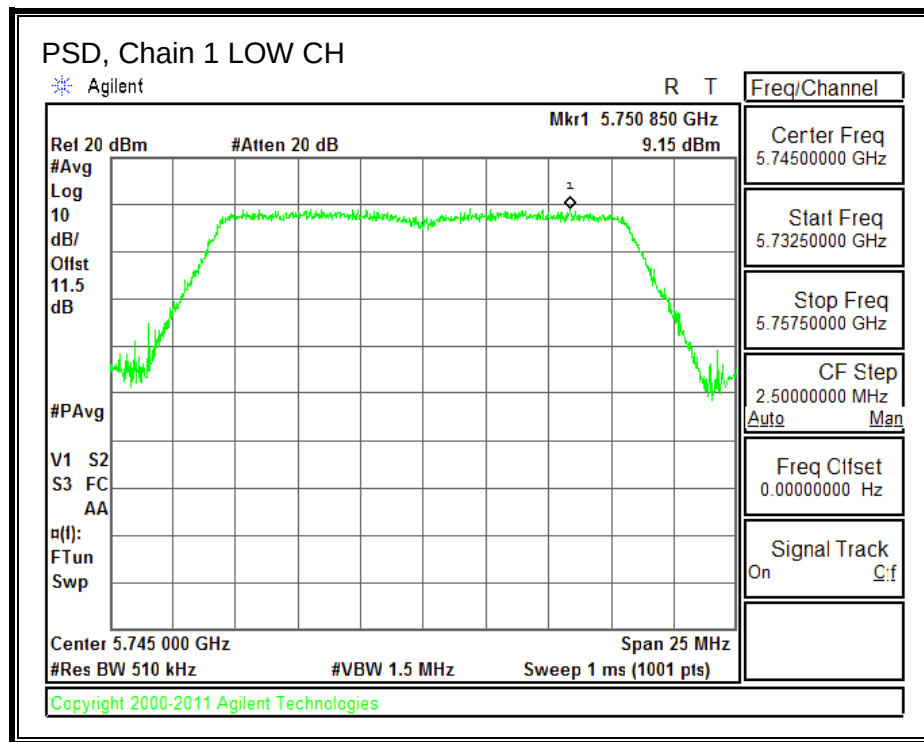

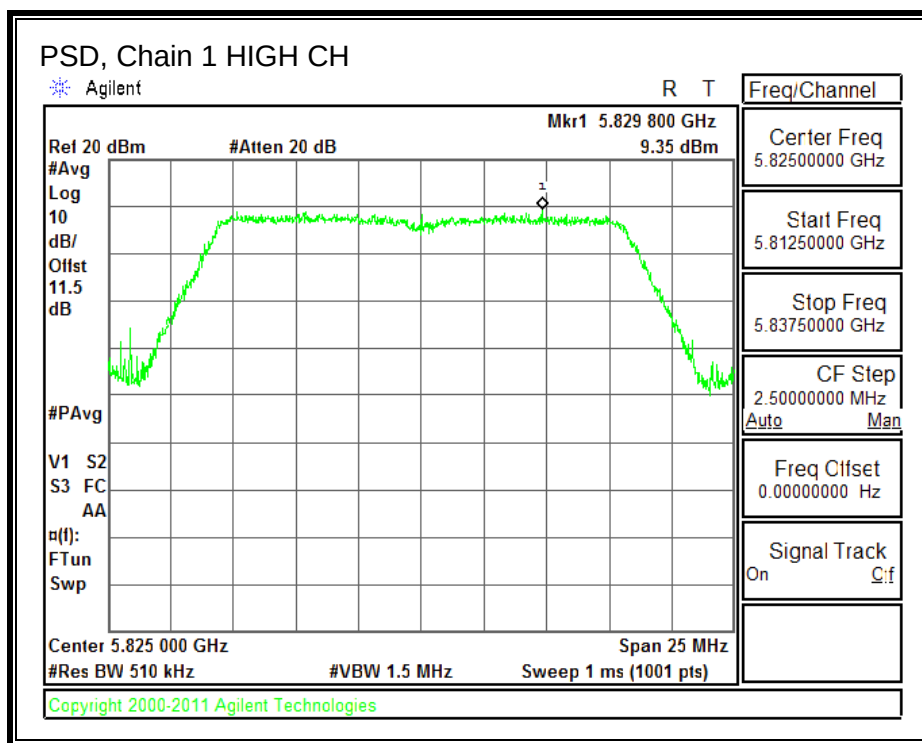

9.17. 802.11n HT20 1Tx MODE IN THE 5.8 GHz BAND

9.17.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)



IC RSS-210 A8.2 (a)


The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	5745	17.60	0.5
Mid	5785	17.60	0.5
High	5825	17.60	0.5

6 dB BANDWIDTH

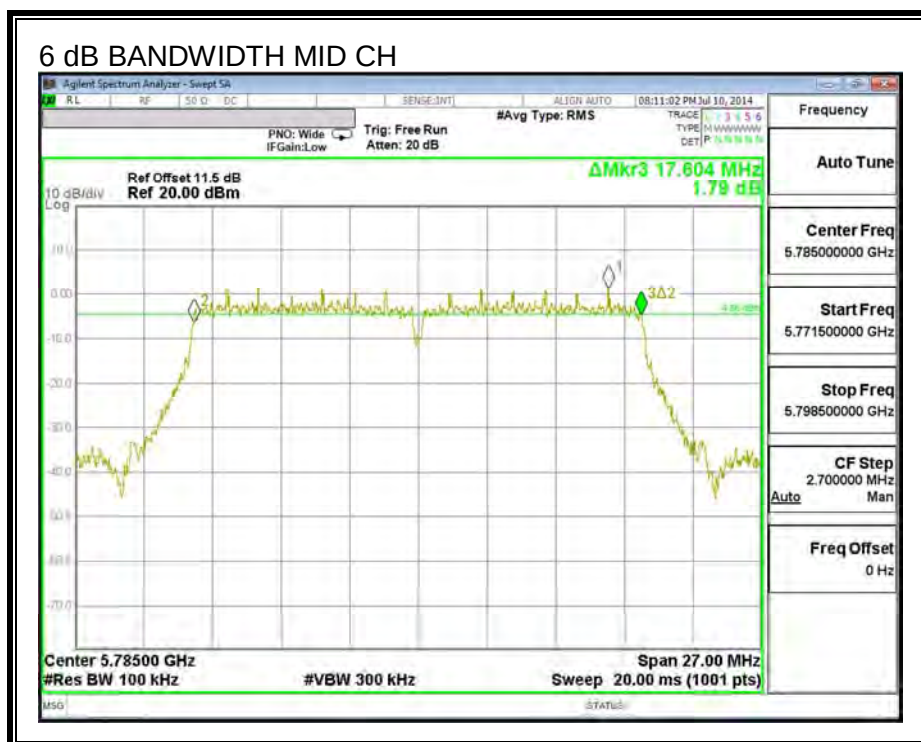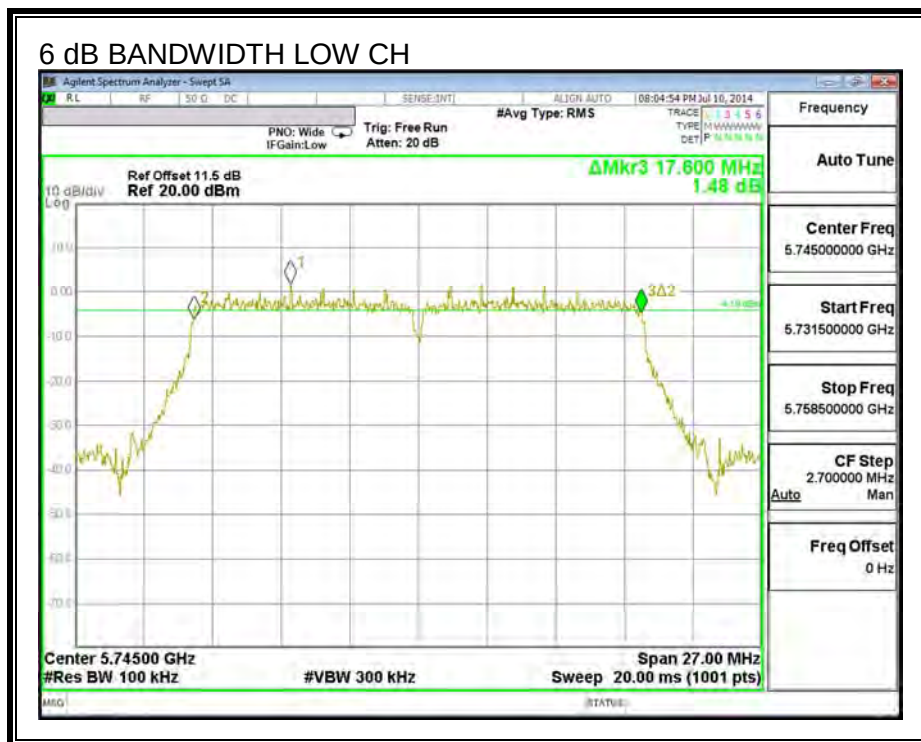

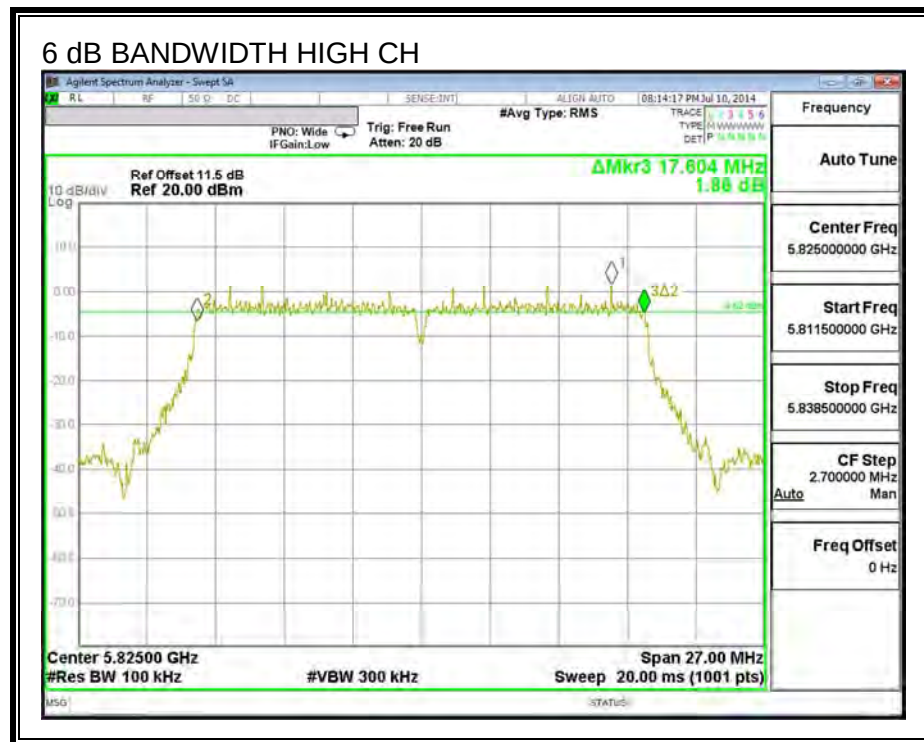

9.17.2. 26 dB BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5745	19.80
Mid	5785	19.86
High	5825	19.71

26 dB BANDWIDTH

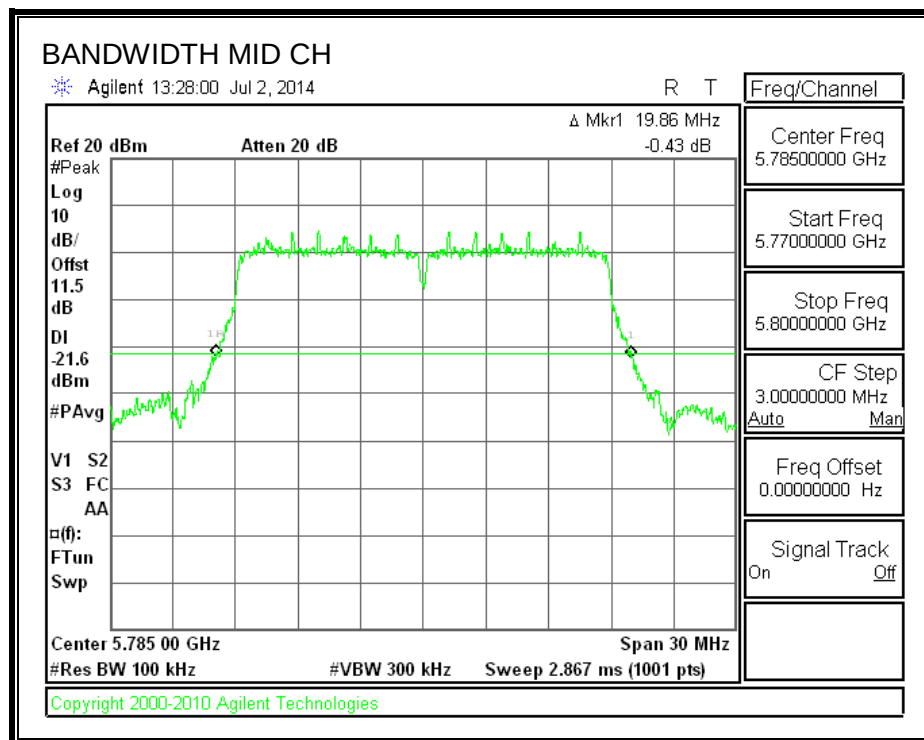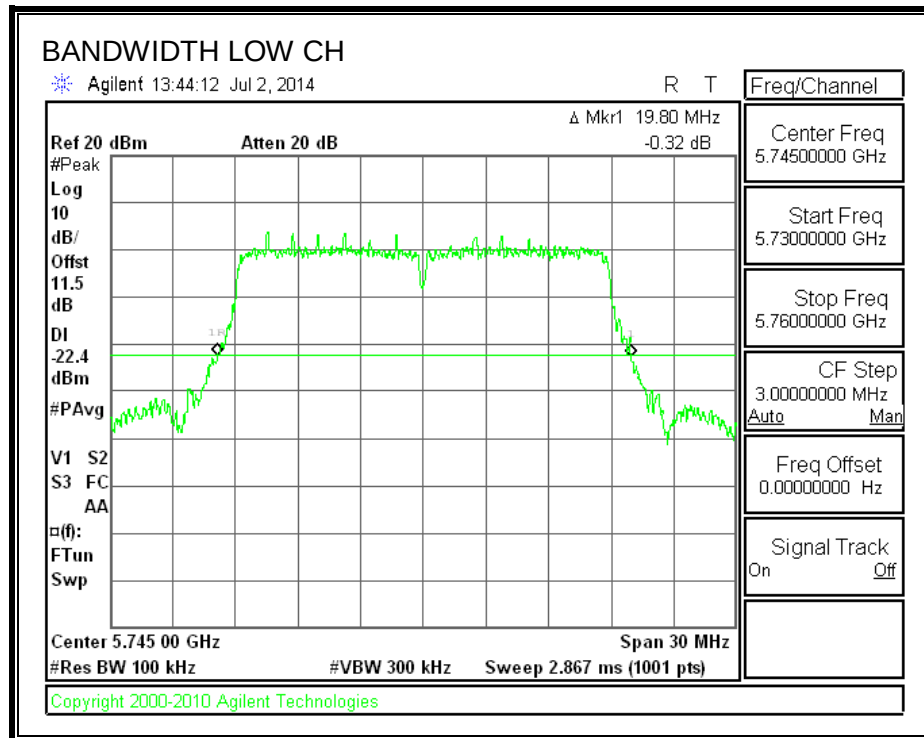

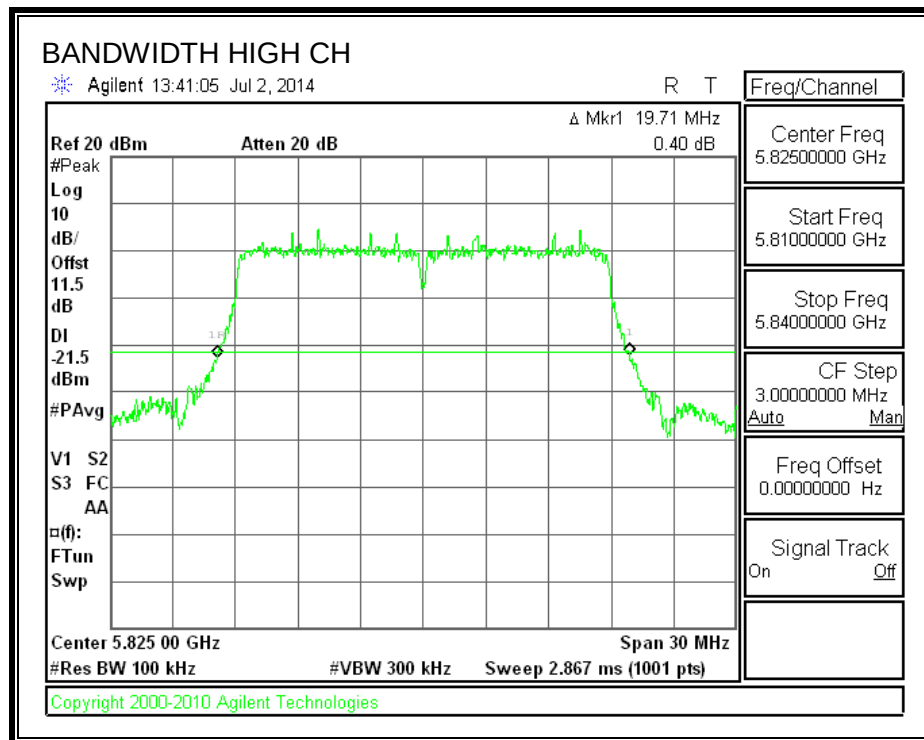

9.17.3. 99% BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5745	17.61
Mid	5785	17.60
High	5825	17.59

99% BANDWIDTH

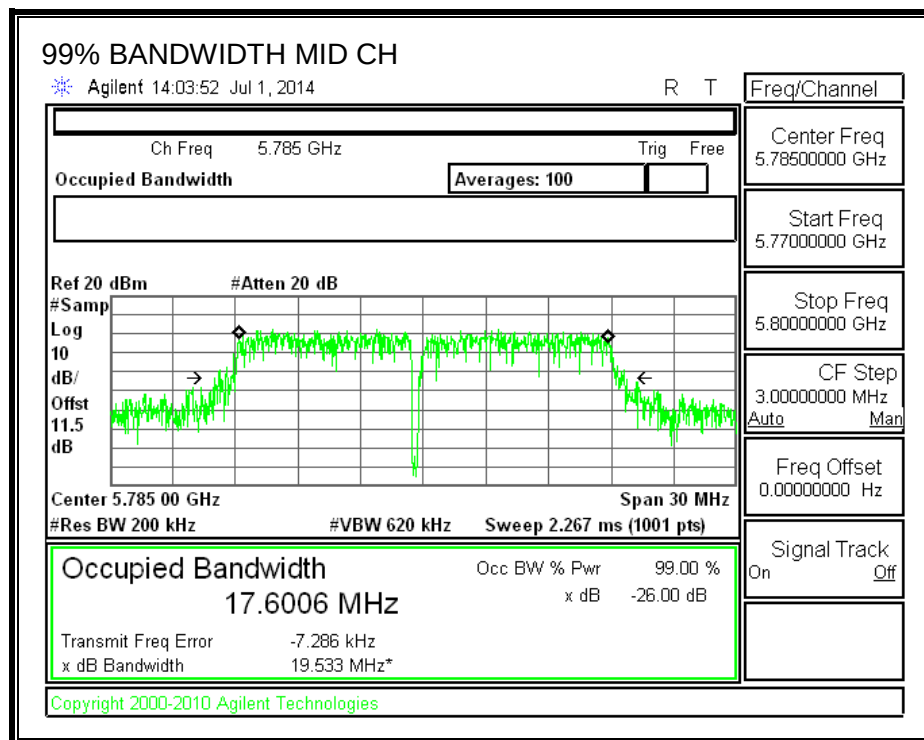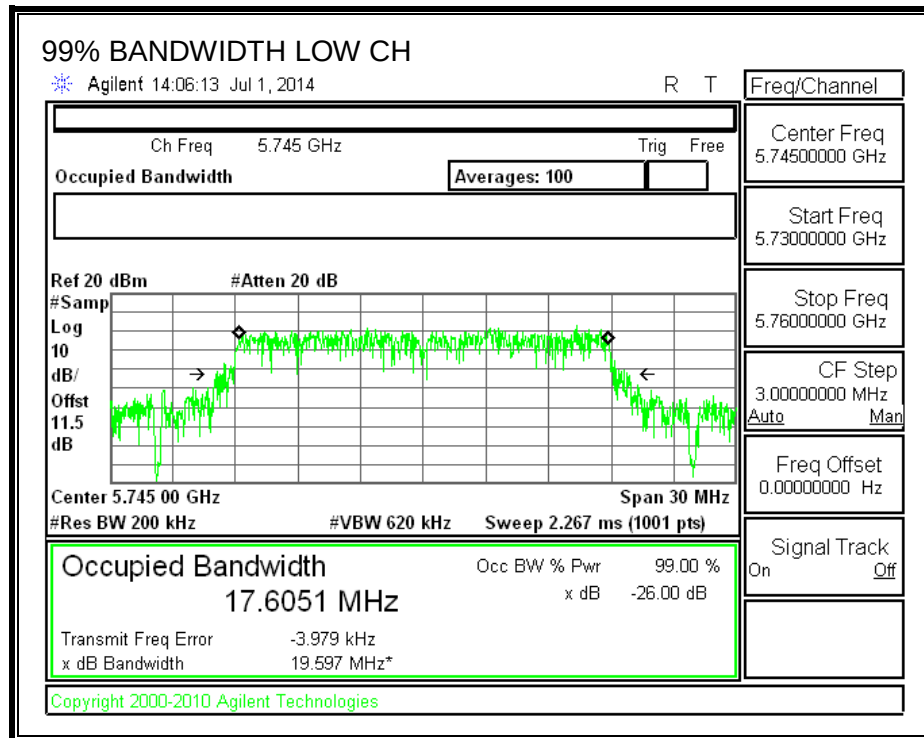

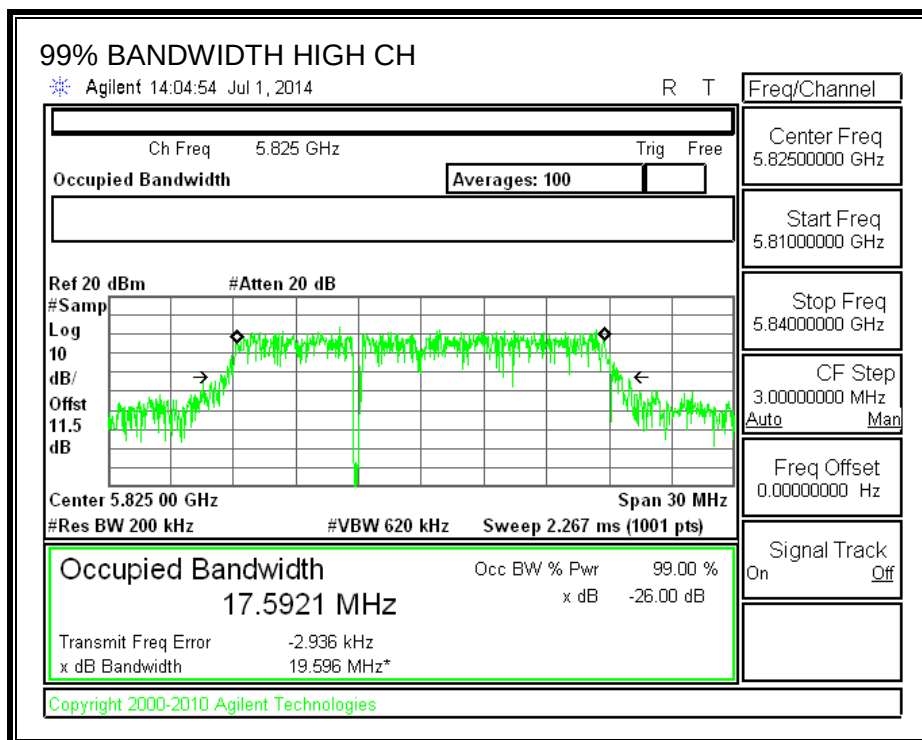

9.17.4. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter. The power meter was setup for a gated power measurement.

The cable assembly insertion loss of 11.51 dB (including 10 dB pad and 1.5 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

Channel	Frequency (MHz)	Power (dBm)
Low	5745	14.87
Mid	5785	15.34
High	5825	15.22

9.17.5. OUTPUT POWER

LIMITS

FCC §15.407 (a) (3)

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

The transmitter output is connected to a power meter. The power meter was setup for a gated power measurement.

The cable assembly insertion loss of 11.5 dB (including 10 dB pad and 1.5 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

Antenna Gain (dBi)
3.76

RESULTS

Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Power Limit (dBm)
Low	5745	3.76	30.00
Mid	5785	3.76	30.00
High	5825	3.76	30.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5745	14.87	14.87	30.00	-15.13
Mid	5785	15.34	15.34	30.00	-14.66
High	5825	15.22	15.22	30.00	-14.78

9.17.6. MAXIMUM POWER SPECTRAL DENSITY (PSD)

LIMITS

FCC §15.407 (a) (3)

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Antenna Gain and Limits



Channel	Frequency (MHz)	Directional Gain (dBi)	PSD Limit (dBm)
Low	5745	3.76	30.00
Mid	5785	3.76	30.00
High	5825	3.76	30.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

PSD Results

Channel	Frequency (MHz)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5745	8.55	8.55	30.00	-21.45
Mid	5785	8.83	8.83	30.00	-21.17
High	5825	8.99	8.99	30.00	-21.01

PSD, Chain 0

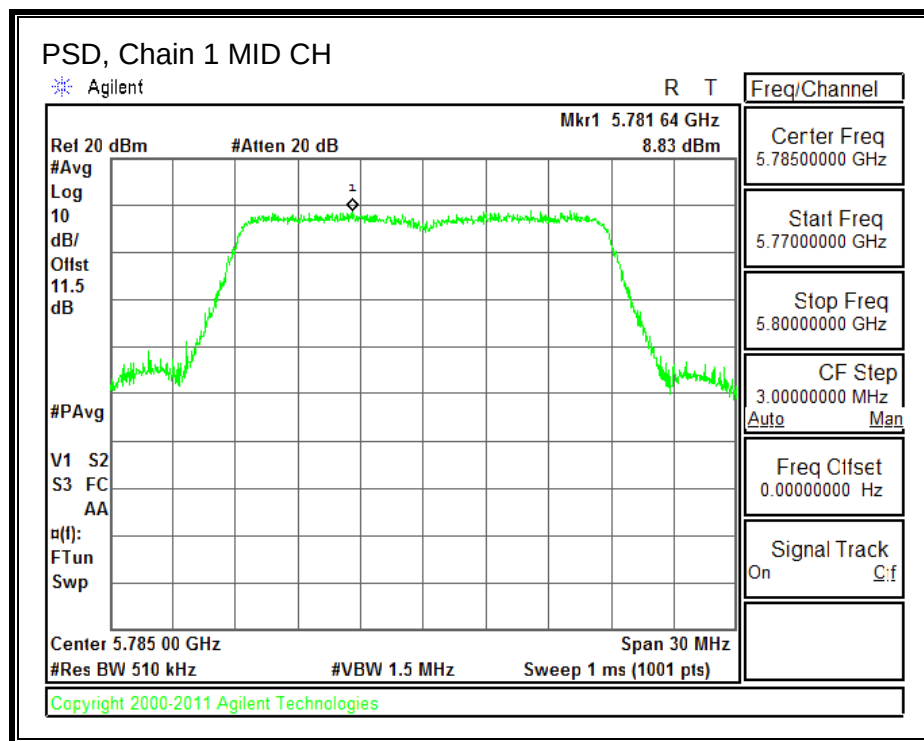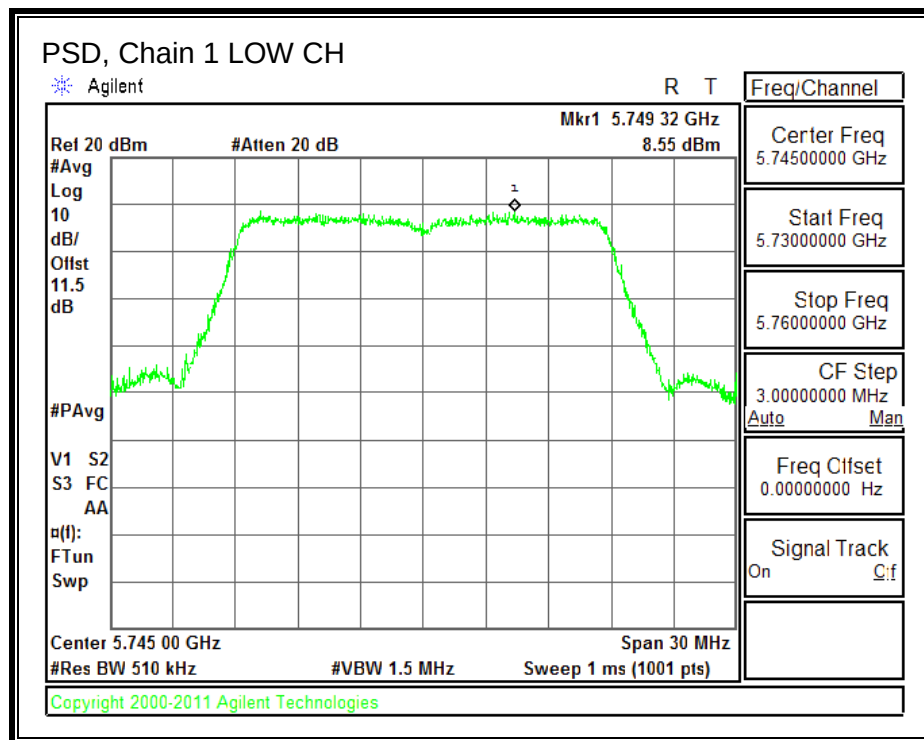

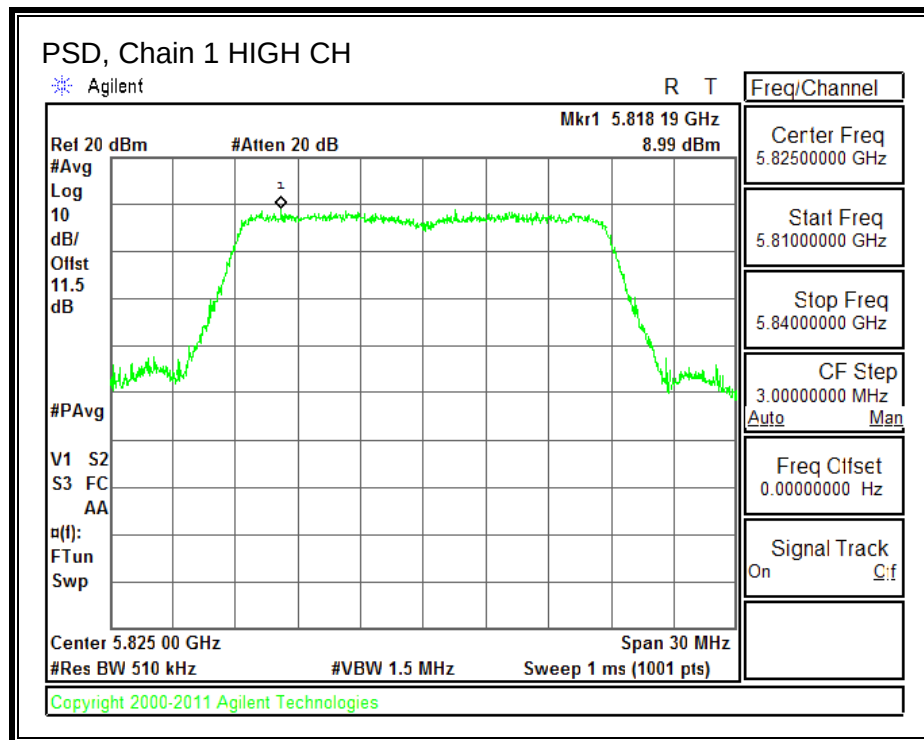

9.18. 802.11n HT20 2Tx MODE IN THE 5.8 GHz BAND

9.18.1. 6 dB BANDWIDTH

LIMITS



FCC §15.407 (e)


The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS


Channel	Frequency (MHz)	6 dB BW Chain 0 (MHz)	6 dB BW Chain 1 (MHz)	Minimum Limit (MHz)
Low	5745	17.60	17.58	0.5
Mid	5785	17.60	17.60	0.5
High	5825	17.60	17.60	0.5



6 dB BANDWIDTH, Chain 0

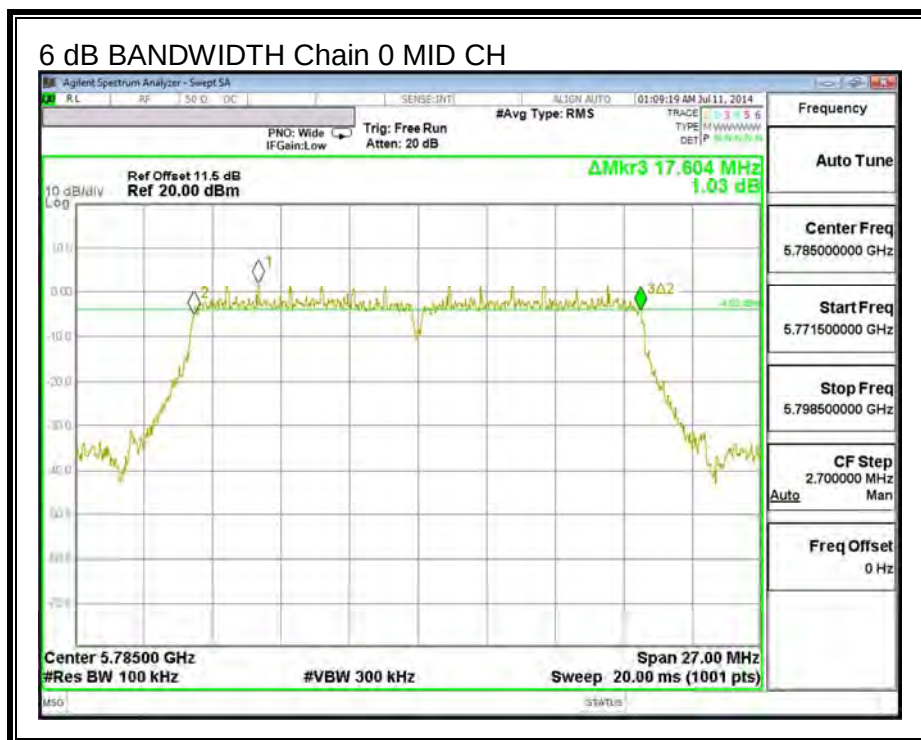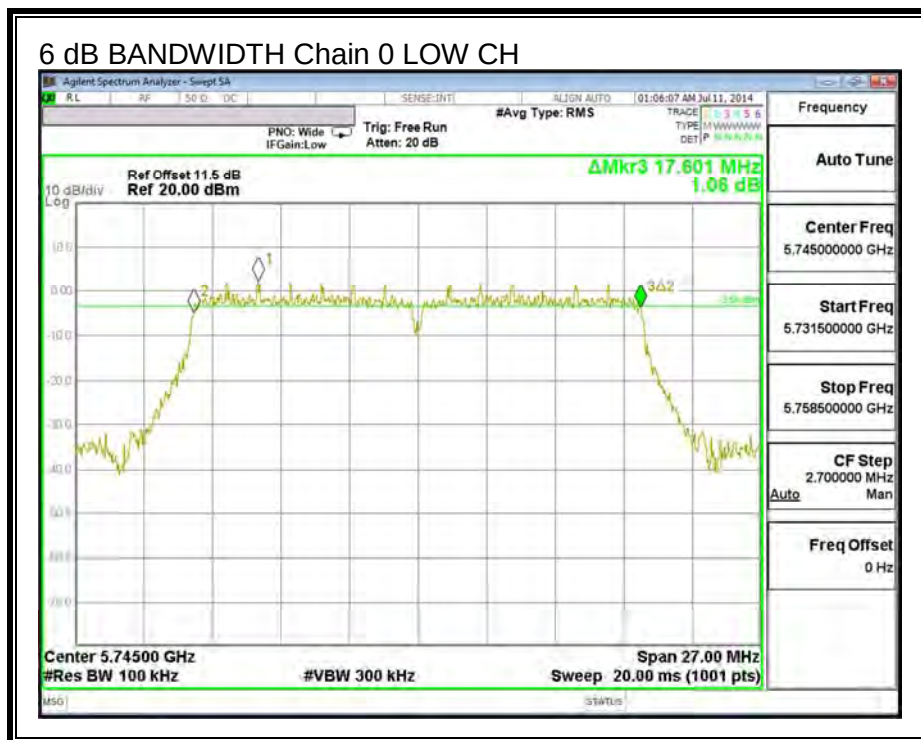

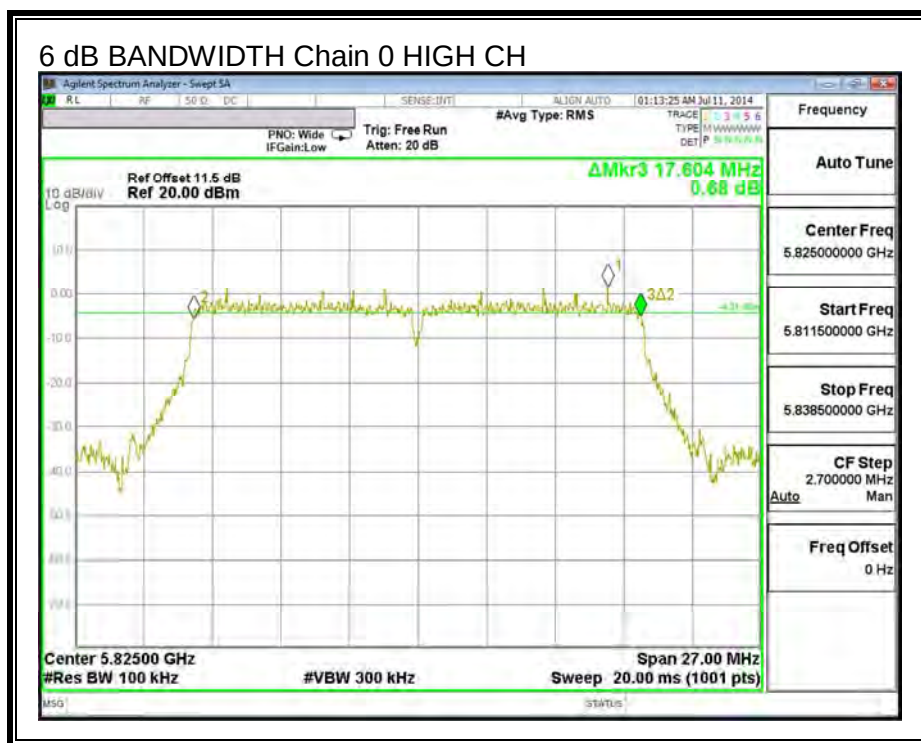

6 dB BANDWIDTH, Chain 1

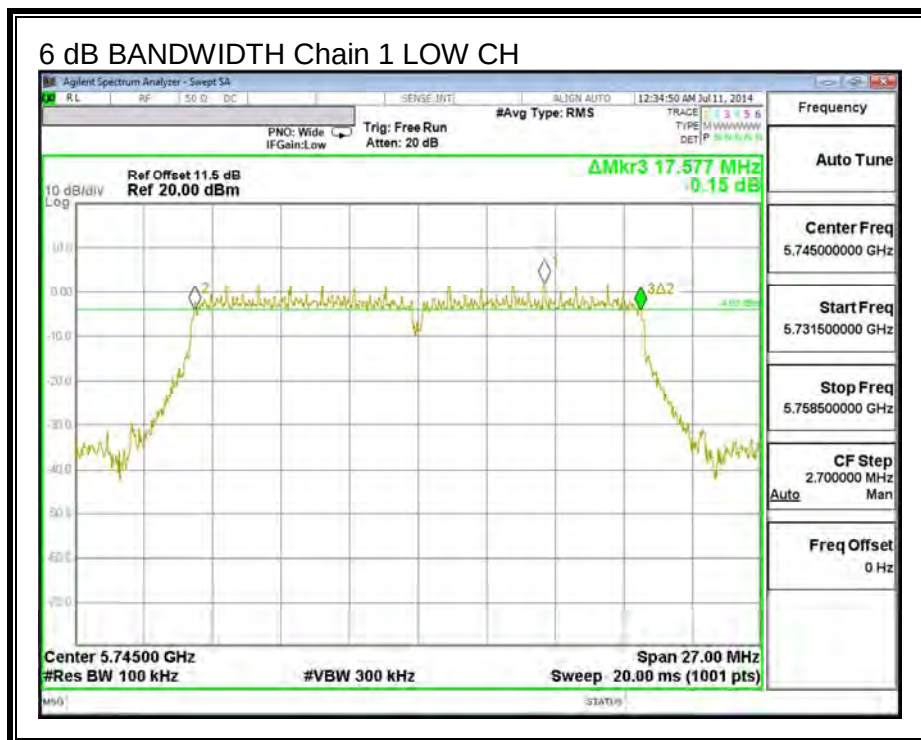

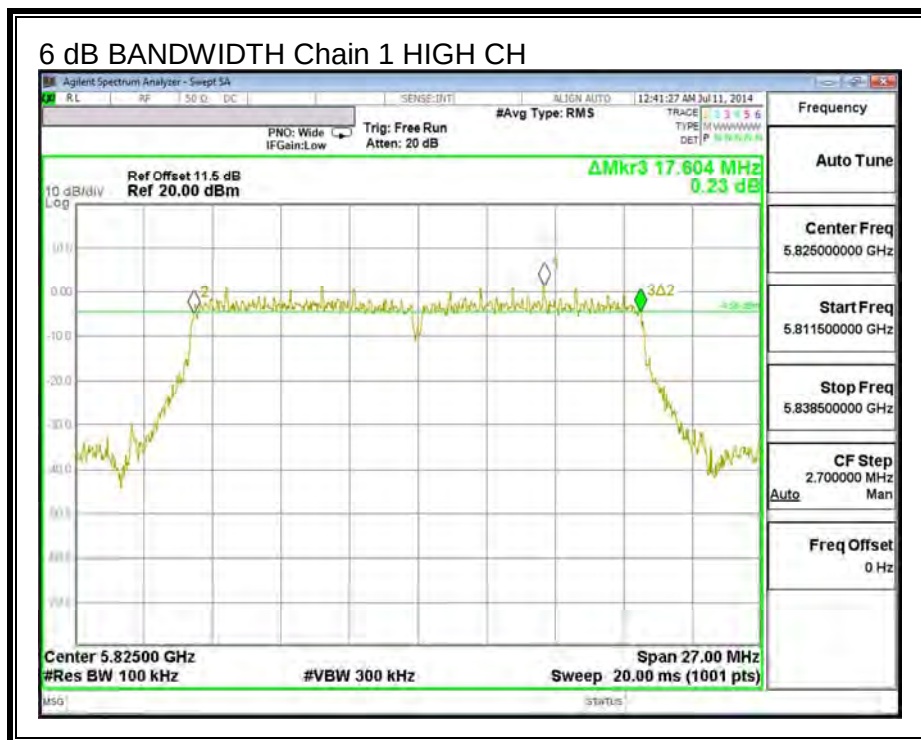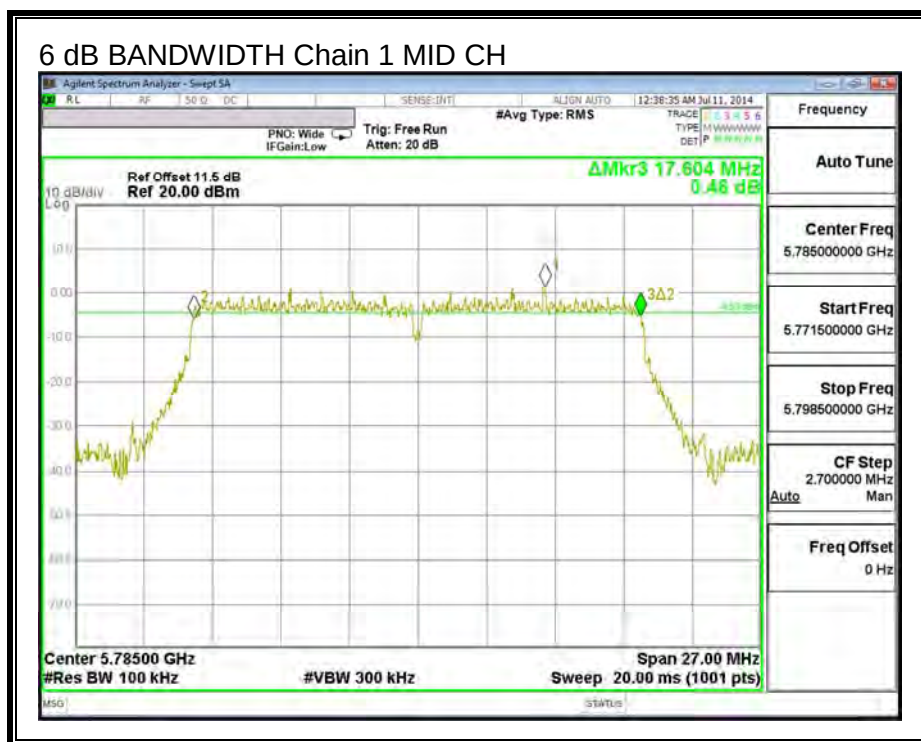

9.18.2. 26 dB BANDWIDTH

LIMITS



None; for reporting purposes only.


RESULTS

Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)
Low	5745	19.65	19.62
Mid	5785	19.83	19.86
High	5825	19.83	19.89


26 dB BANDWIDTH



26 dB BANDWIDTH, Chain 0

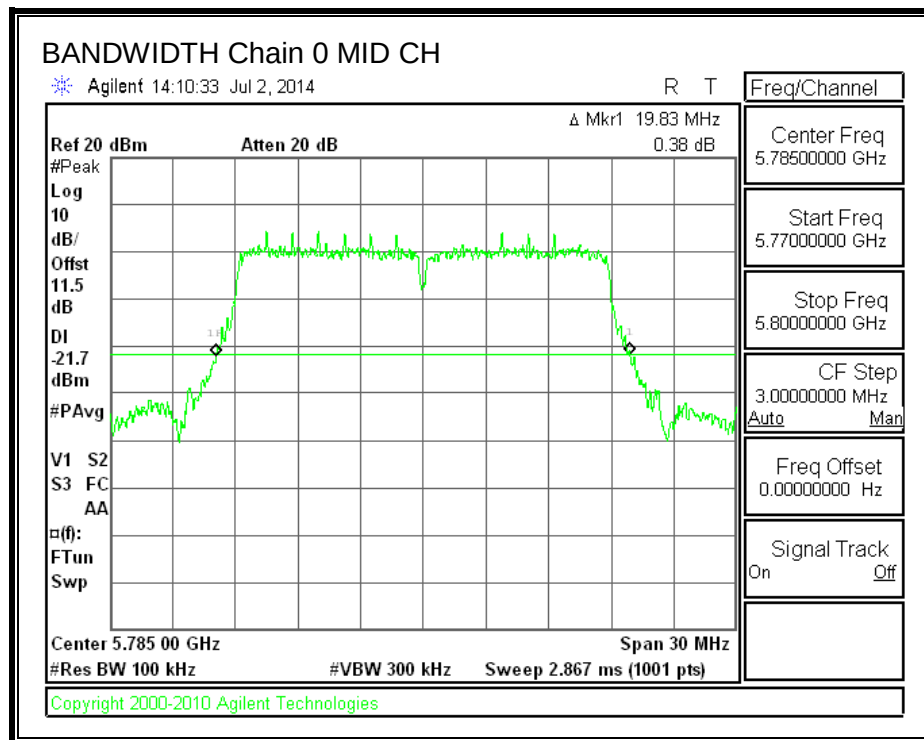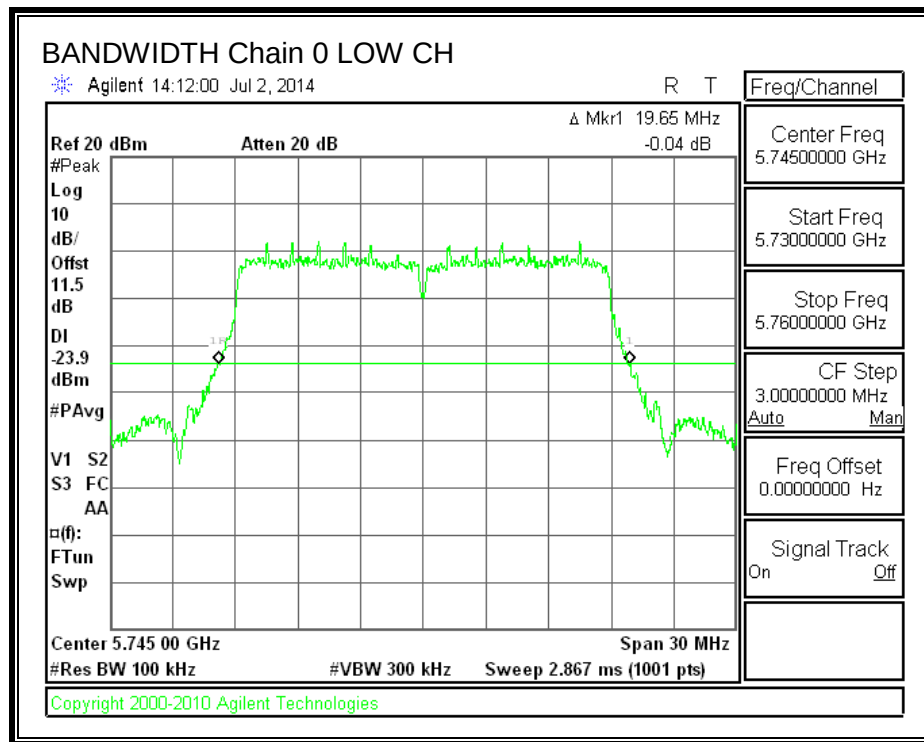

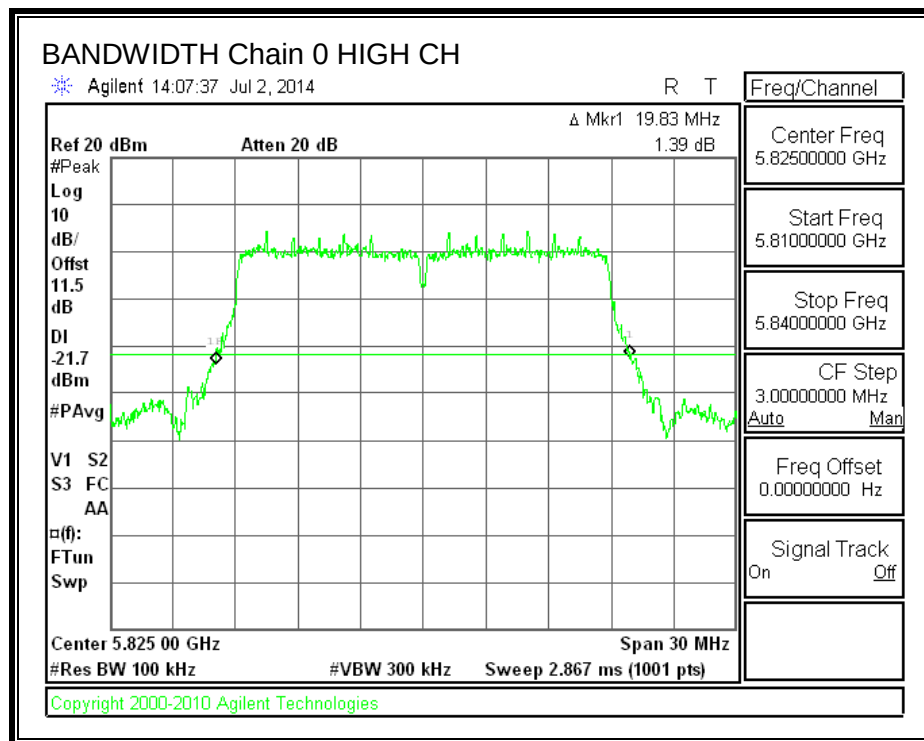

26 dB BANDWIDTH, Chain 1

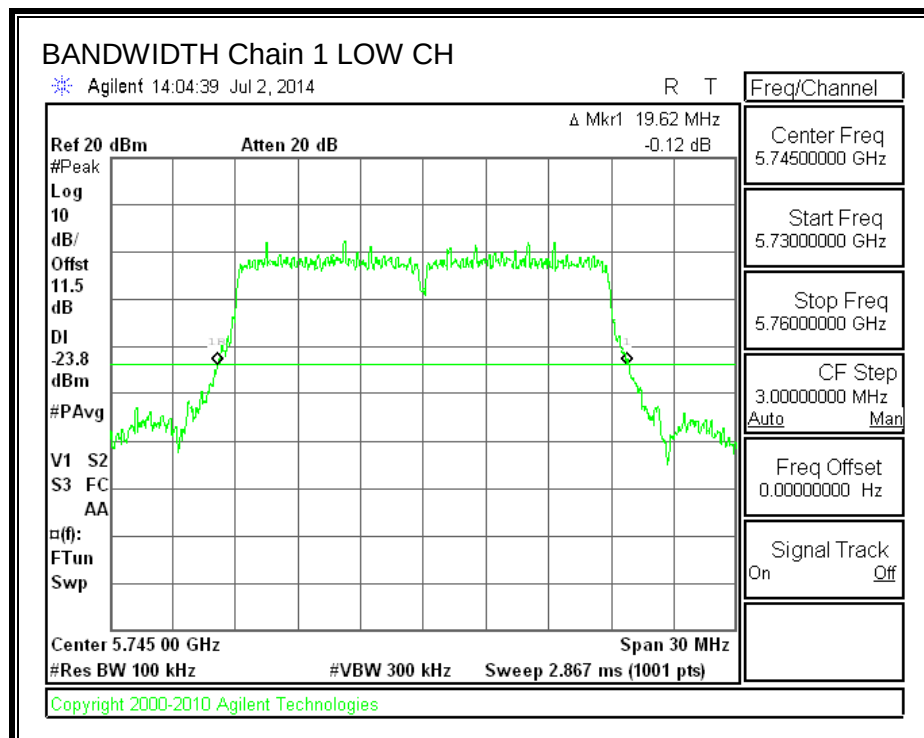

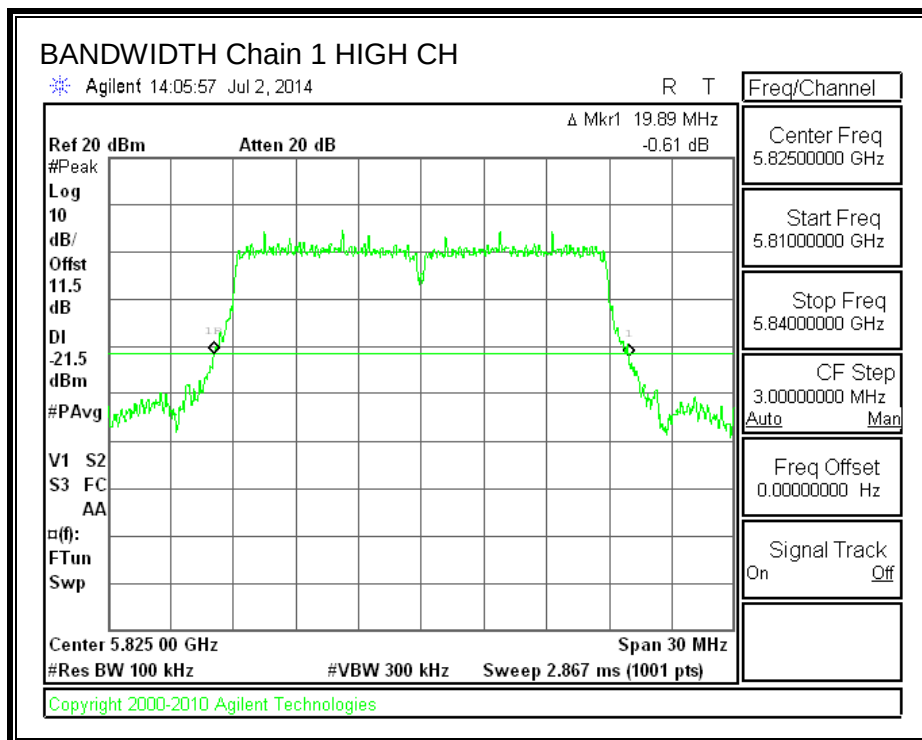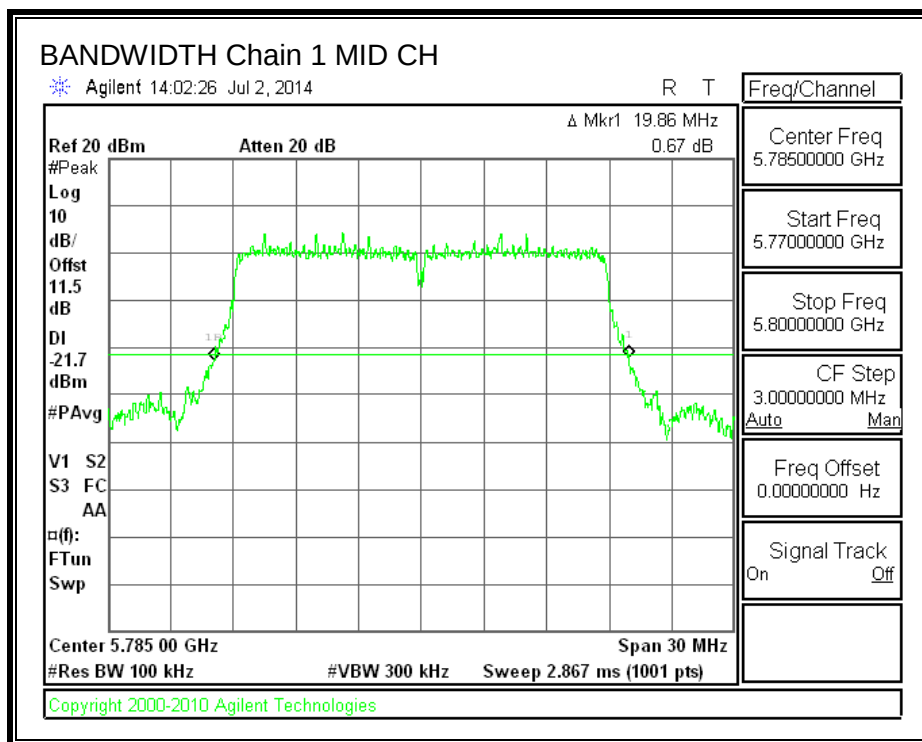

9.18.3. 99% BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS


Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)
Low	5745	17.6290	17.6740
Mid	5785	17.6460	17.6760
High	5825	17.5790	17.6350



99% BANDWIDTH, Chain 0

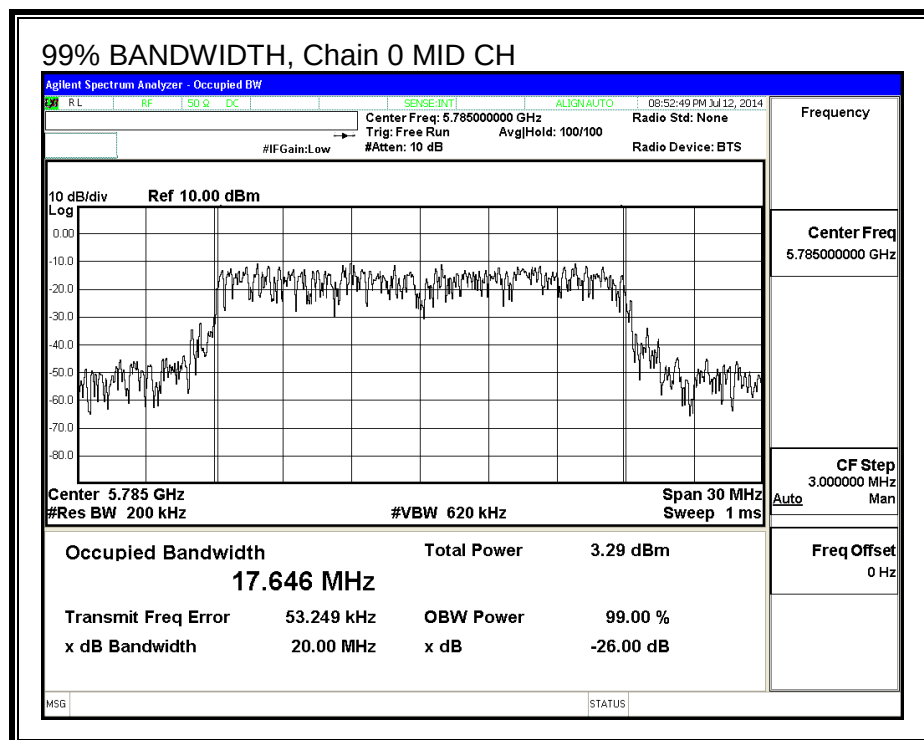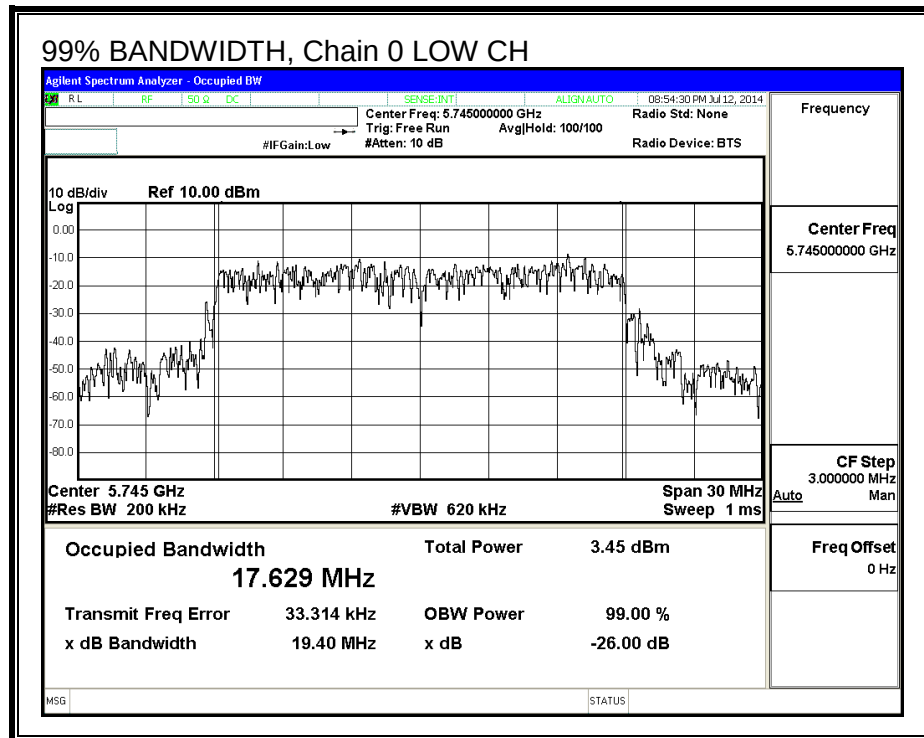

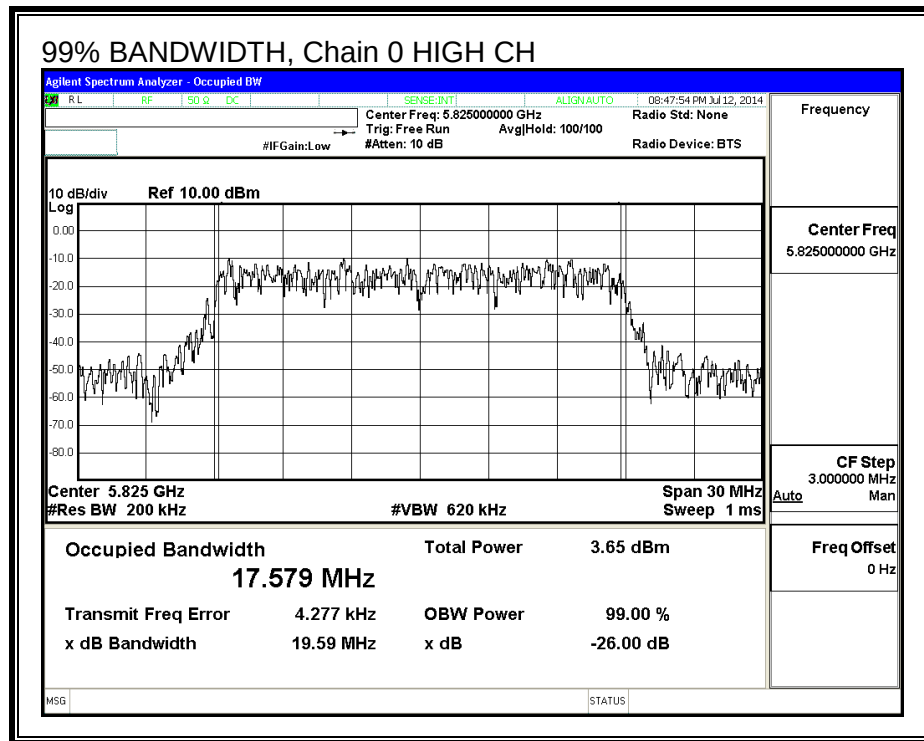

99% BANDWIDTH, Chain 1

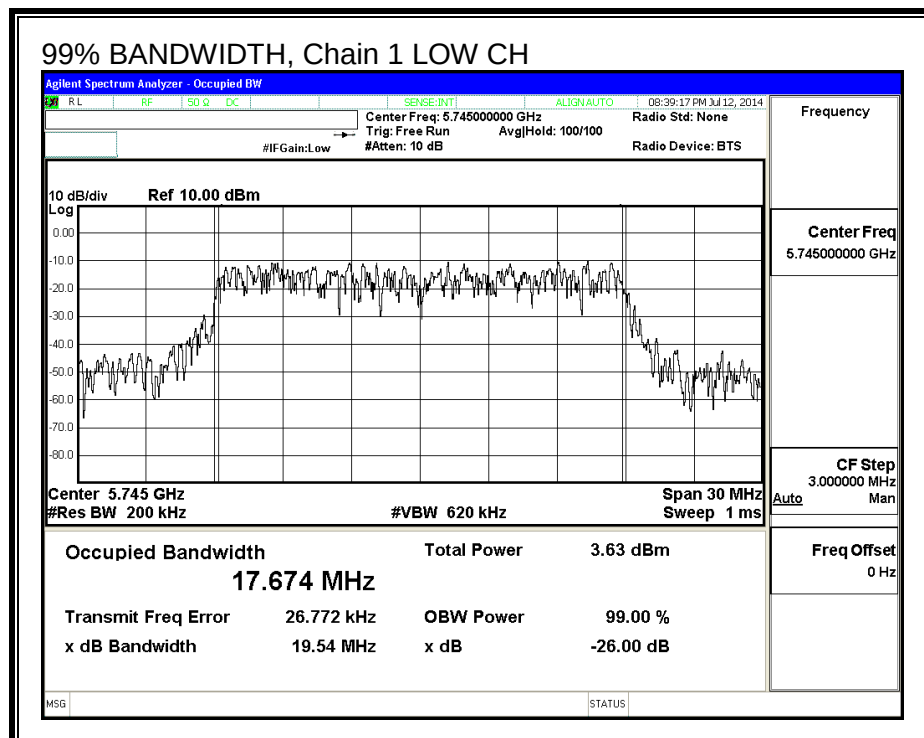

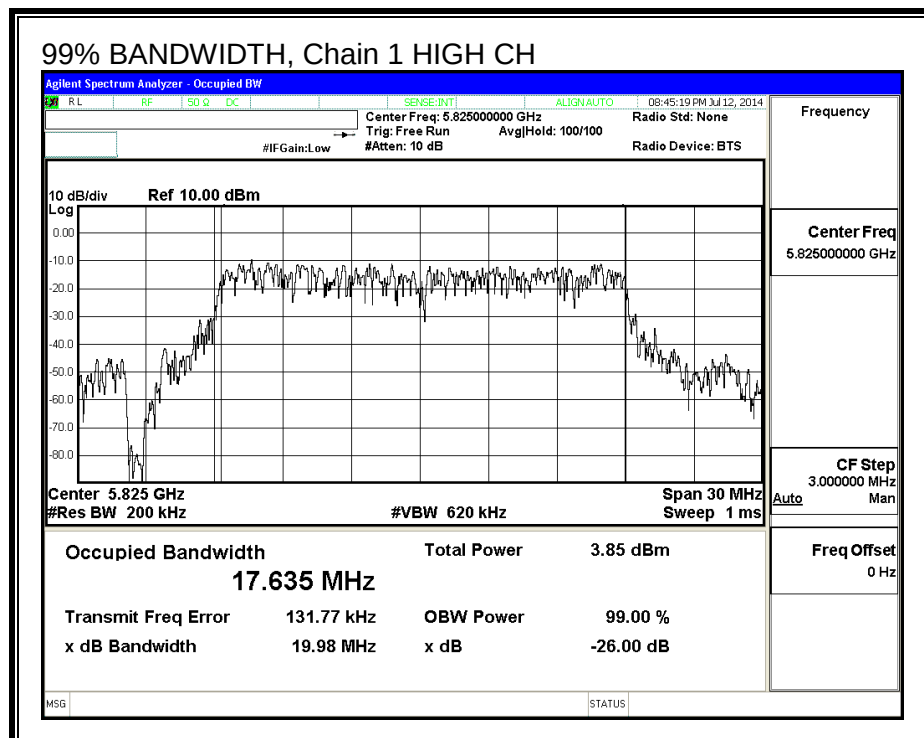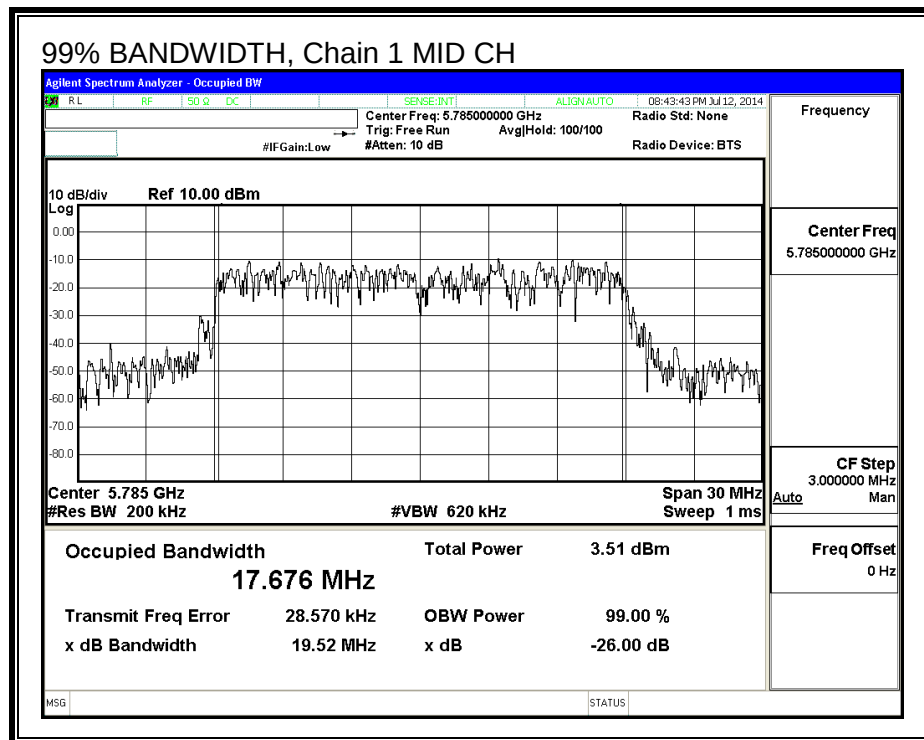

9.18.4. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter. The power meter was setup for a gated power measurement.

The cable assembly insertion loss of 11.5 dB (including 10 dB pad and 1.5 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

Channel	Frequency (MHz)	Chain 0 Power (dBm)	Chain 1 Power (dBm)	Total Power (dBm)
Low	5745	12.95	12.76	15.87
Mid	5785	15.29	15.27	18.29
High	5825	15.35	15.43	18.40

9.18.5. OUTPUT POWER

LIMITS

FCC §15.407 (a) (3)

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

The transmitter output is connected to a power meter. The power meter was setup for a gated power measurement.

The cable assembly insertion loss of 11.5 dB (including 10 dB pad and 1.5 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
2.68	3.76	3.25

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Correlated Chains Directional Gain (dBi)
2.68	3.76	6.25

RESULTS

Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Power Limit (dBm)
Low	5745	3.25	30.00
Mid	5785	3.25	30.00
High	5825	3.25	30.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5745	12.95	12.76	15.87	30.00	-14.13
Mid	5785	15.29	15.27	18.29	30.00	-11.71
High	5825	15.35	15.43	18.40	30.00	-11.60

9.18.6. MAXIMUM POWER SPECTRAL DENSITY (PSD)

LIMITS

FCC §15.407 (a) (3)

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
2.68	3.76	3.25

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Correlated Chains Directional Gain (dBi)
2.68	3.76	6.25

RESULTS



Antenna Gain and Limits


Channel	Frequency (MHz)	Directional Gain (dBi)	PSD Limit (dBm)
Low	5745	6.25	29.75
Mid	5785	6.25	29.75
High	5825	6.25	29.75

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--


PSD Results



Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5745	7.11	6.81	9.97	29.75	-19.78
Mid	5785	10.74	10.96	13.86	29.75	-15.89
High	5825	10.88	10.80	13.85	29.75	-15.90

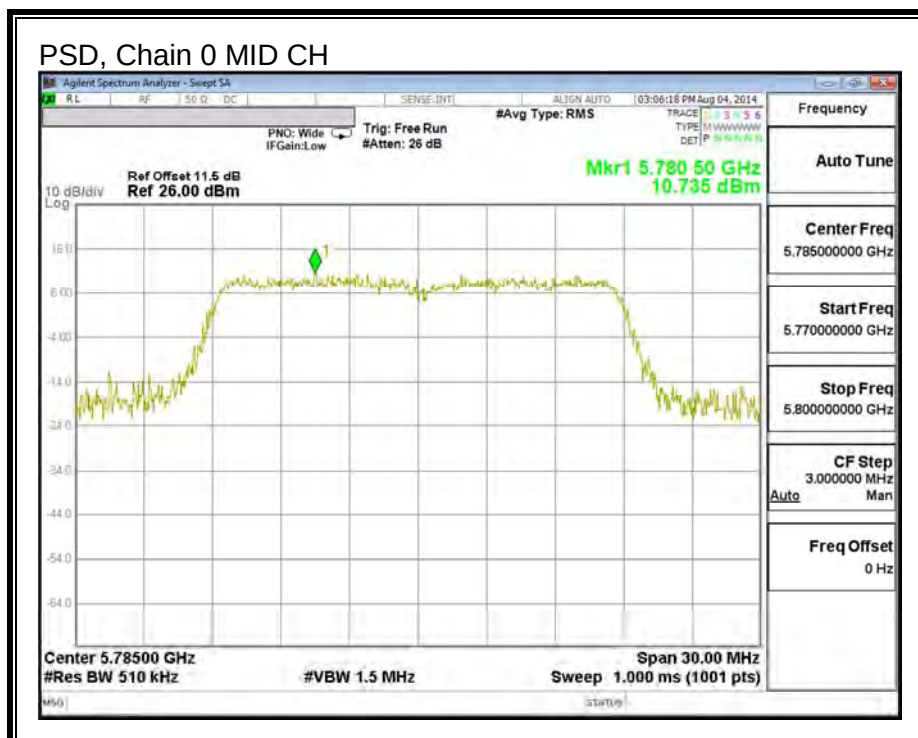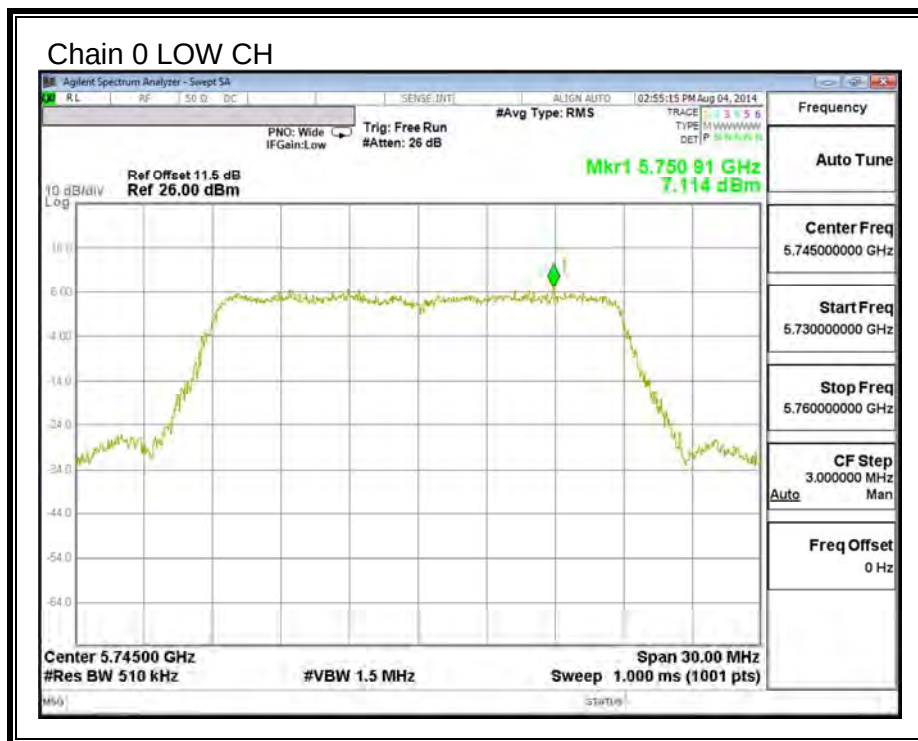PSD, Chain 0

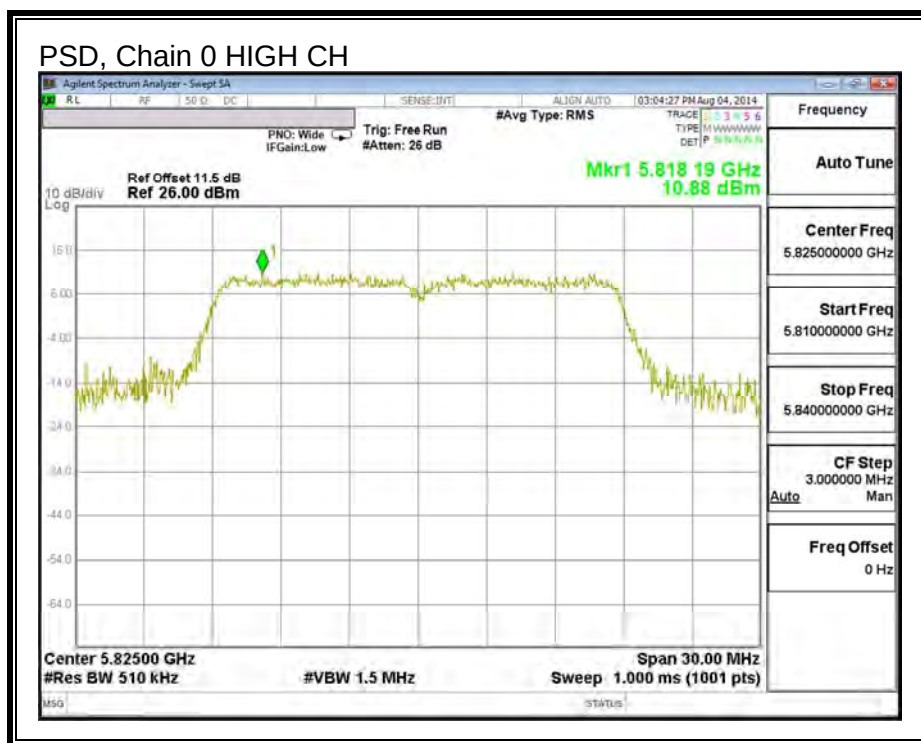

PSD, Chain 1

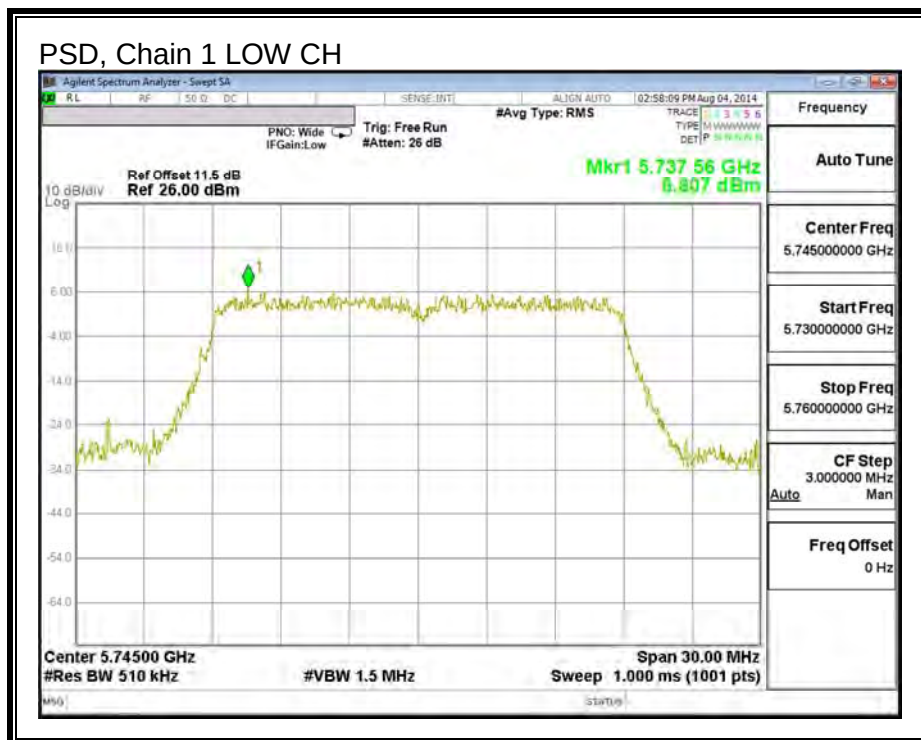

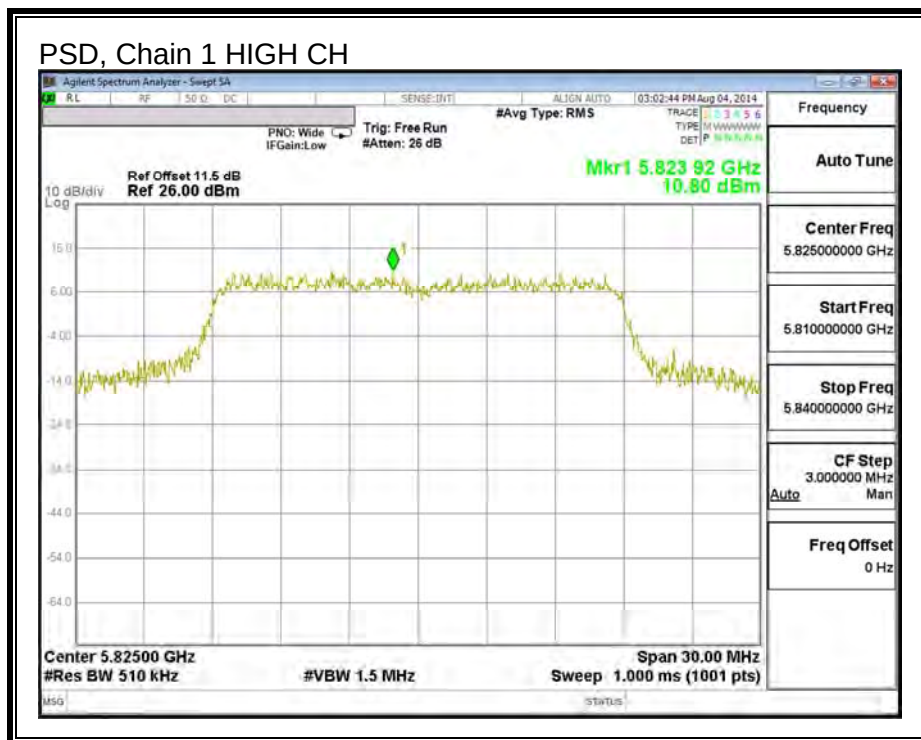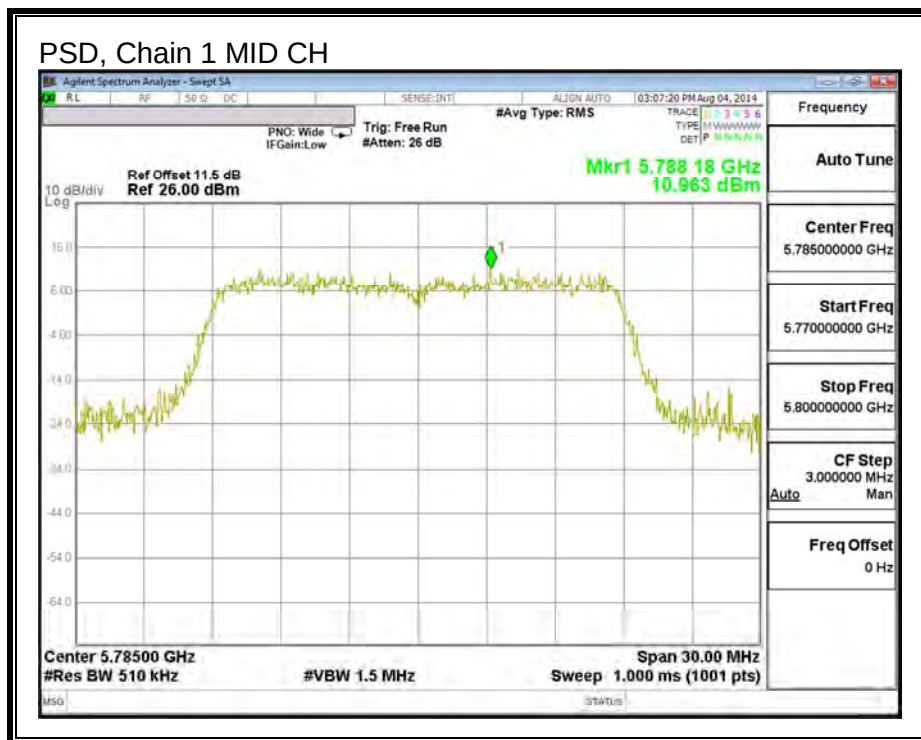

9.19. 802.11n HT40 1Tx MODE IN THE 5.8 GHz BAND

9.19.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)



IC RSS-210 A8.2 (a)

The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	5755	36.35	0.5
High	5795	36.36	0.5

6 dB BANDWIDTH

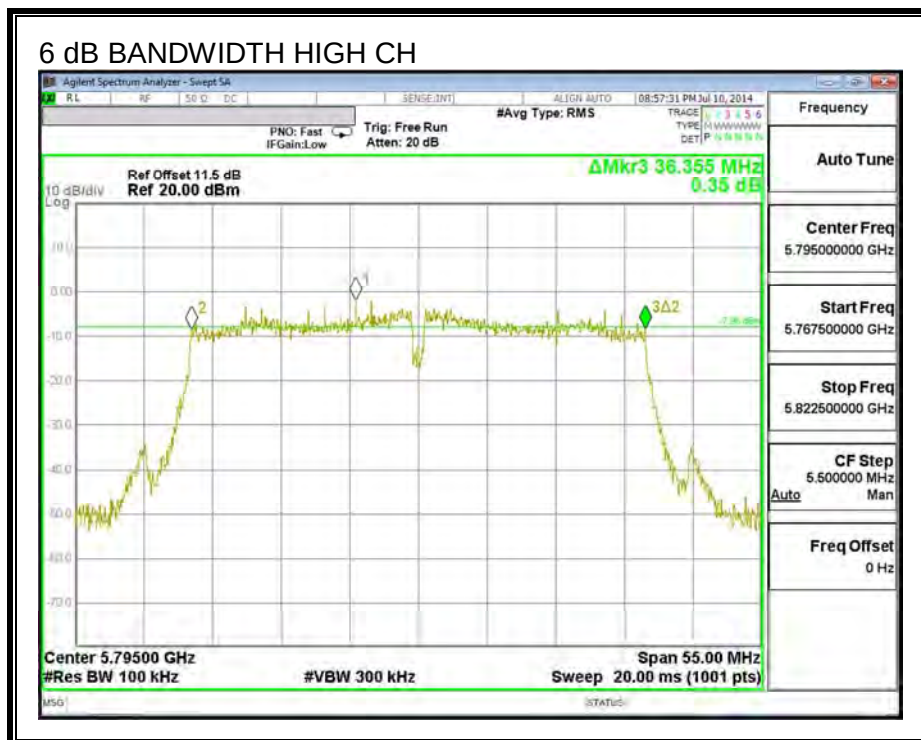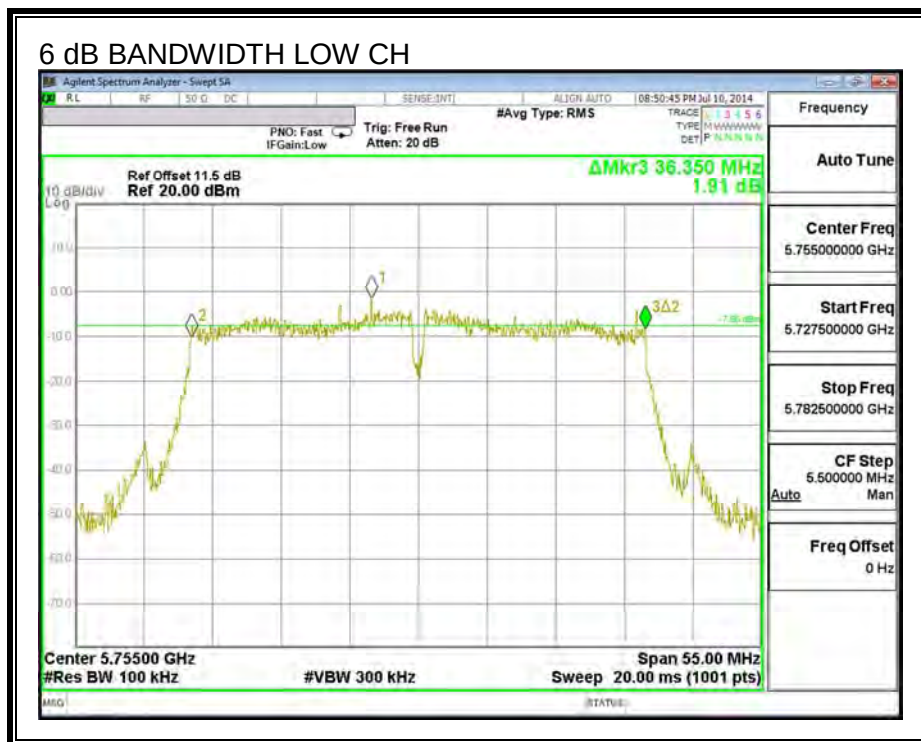

9.19.2. 26 dB BANDWIDTH



LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5755	38.5
High	5795	38.6

26 dB BANDWIDTH

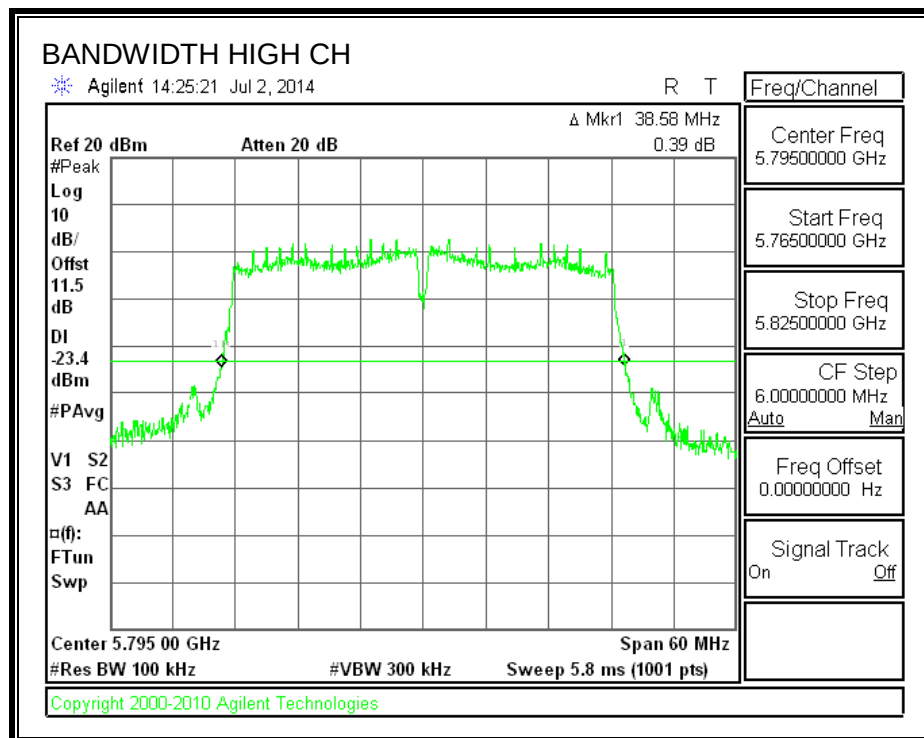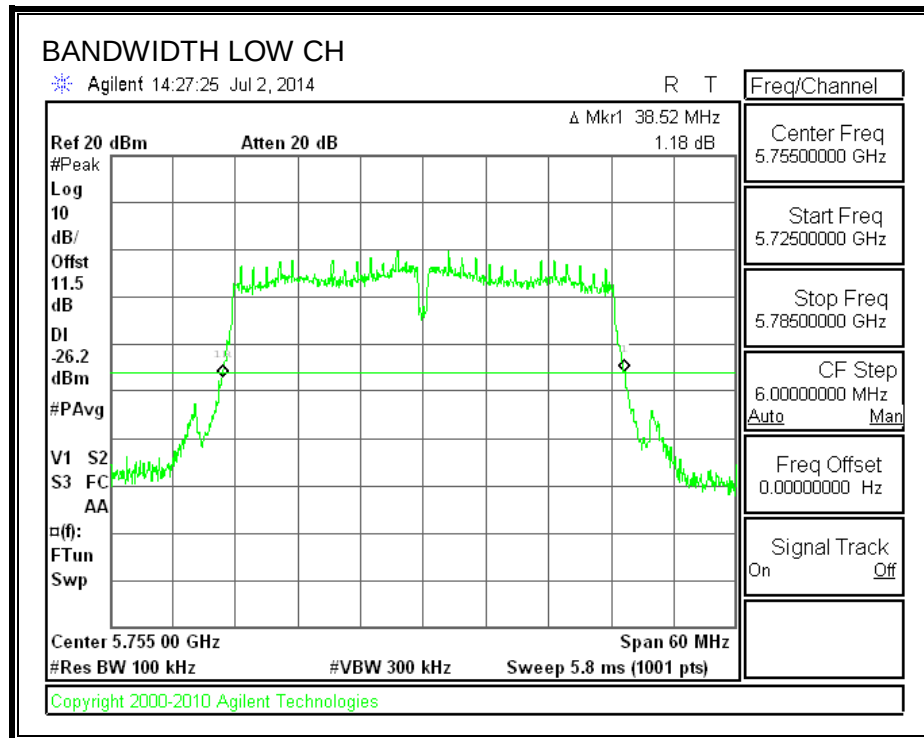



9.19.3. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5755	36.15
High	5795	36.14

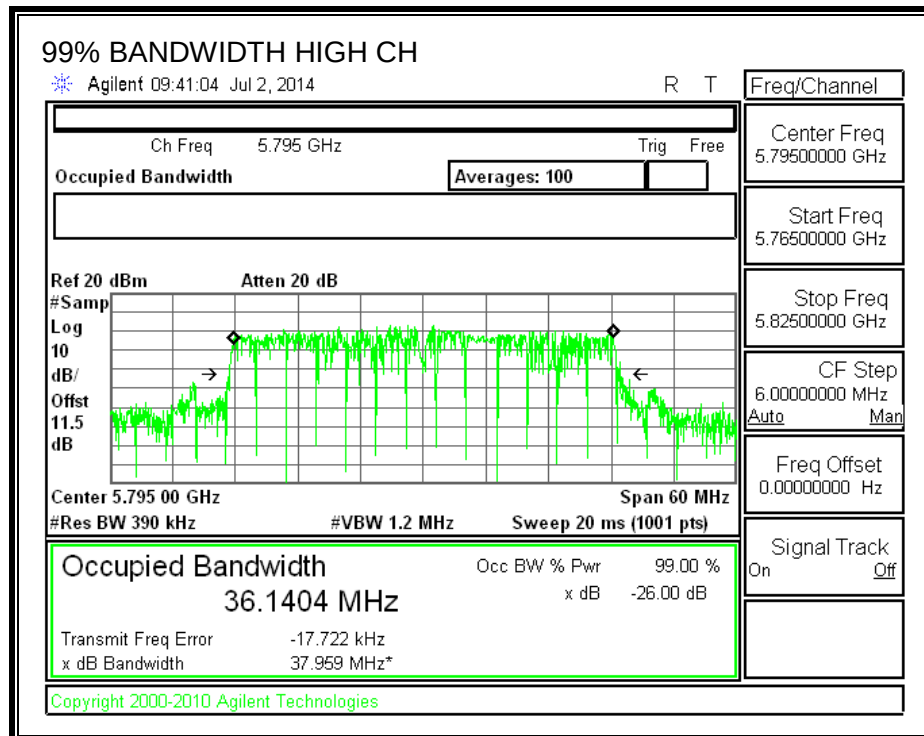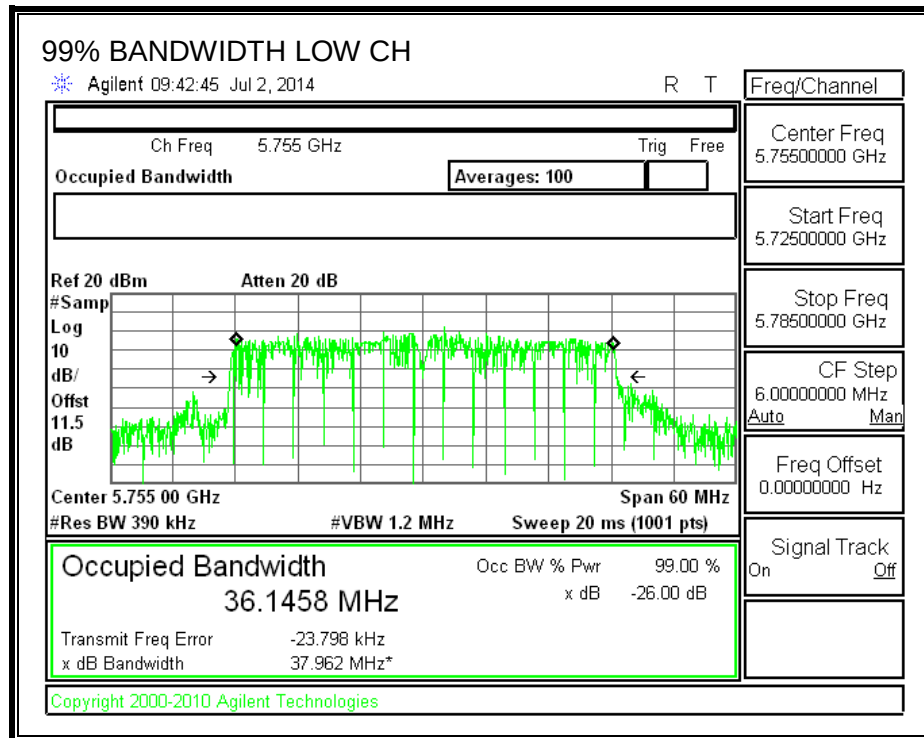

9.19.4. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter. The power meter was setup for a gated power measurement.

The cable assembly insertion loss of 11.5 dB (including 10 dB pad and 1.5 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

Channel	Frequency (MHz)	Power (dBm)
Low	5755	11.35
High	5795	15.42

9.19.5. OUTPUT POWER

LIMITS

FCC §15.407 (a) (3)

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

The transmitter output is connected to a power meter. The power meter was setup for a gated power measurement.

The cable assembly insertion loss of 11.5 dB (including 10 dB pad and 1.5 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

Antenna Gain (dBi)
3.76