TEST REPORT

Test Report No. : UL-RPT-RP10407443JD10M V2.0

Manufacturer	:	Apple Inc.
Model No.	:	A1600
FCC ID	:	BCGA1600
Technology	:	LTE Band 26
Test Standard(s)	:	FCC Part 90 Subpart S

1. This test report shall not be reproduced in full or partial, without the written approval of UL VS LTD.
2. The results in this report apply only to the sample tested.
3. The sample tested is in compliance with the above standard(s).
4. The test results in this report are traceable to the national or international standards.
5. Version 2.0 supersedes all previous versions.

Date of Issue: 15 September 2014

Checked by:

Sarah Williams
Engineer, Radio Laboratory

Issued by :

pp

John Newell
Group Manager,
UL VS LTD

This laboratory is accredited by UKAS. The tests reported herein have been performed in accordance with its' terms of accreditation.

UL VS LTD

Pavilion A, Ashwood Park, Ashwood Way, Basingstoke, Hampshire, RG23 8BG, UK
Telephone: +44 (0)1256 312000
Facsimile: +44 (0)1256 312001

This page has been left intentionally blank.

Table of Contents

1. Customer Information 4

2. Summary of Testing 5
2.1. General Information 5
2.2. Summary of Test Results 5
2.3. Methods and Procedures 5
2.4. Deviations from the Test Specification 5

3. Equipment Under Test (EUT) 6
3.1. Identification of Equipment Under Test (EUT) 6
3.2. Description of EUT 6
3.3. Modifications Incorporated in the EUT 6
3.4. Additional Information Related to Testing 7
3.5. Support Equipment 8

4. Operation and Monitoring of the EUT during Testing 9
4.1. Operating Modes 9
4.2. Configuration and Peripherals 9
4.3. Resource Block Allocation 10

5. Measurements, Examinations and Derived Results 11
5.1. General Comments 11
5.2. Test Results 12
5.2.1. Transmitter Carrier Output Power and Effective Radiated Power (ERP) 12
5.2.2. Transmitter Occupied Bandwidth 19
5.2.3. Transmitter Radiated Emissions 40
5.2.4. Transmitter Radiated Emissions at Band Edges 43
5.2.5. Transmitter Frequency Stability (Temperature Variation) 60
5.2.6. Transmitter Frequency Stability (Voltage Variation) 62

6. Measurement Uncertainty 63

7. Report Revision History 64

1. Customer Information

Company Name:	Apple Inc.
Address:	1 Infinite Loop Cupertino, CA 95014 U.S.A.

2. Summary of Testing

2.1. General Information

Specification Reference:	47CFR90
Specification Title:	Code of Federal Regulations Volume 47 (Telecommunications): Part 90 Subpart S - Regulations Governing Licensing and Use of Frequencies in the 806-824, 851-869, 896-901 and 935-940 MHz Bands
Site Registration:	209735
Location of Testing:	UL VS LTD, Unit 3 Horizon, Wade Road, Kingsland Business Park, Basingstoke, Hampshire, RG24 8AH, United Kingdom
Test Dates:	09 July 2014 to 14 September 2014

2.2. Summary of Test Results

FCC Reference (47CFR)	Measurement	Result
90.635(b) / 2.1046	Transmitter Carrier Output Power and Effective Radiated Power (ERP)	✓
90.209(b)(7) / 2.1049	Transmitter Occupied Bandwidth	✓
90.691 / 2.1053	Transmitter Radiated Emissions	✓
90.691 / 2.1053	Transmitter Radiated Band Edge Emissions	✓
90.213 / 2.1055	Transmitter Frequency Stability (Temperature and Voltage Variation)	✓

Key to Results

✓ = Complied ✗ = Did not comply

2.3. Methods and Procedures

Reference:	ANSI/TIA-603-C-2004
Title:	Land Mobile FM or PM – Communications Equipment – Measurement and Performance Standards.
Reference:	FCC KDB 971168 D01 v02r01, 7 June 2013
Title:	Measurement Guidance for Certification of Licensed Digital Transmitters

2.4. Deviations from the Test Specification

For the measurements contained within this test report, there were no deviations from, additions to, or exclusions from the test specification identified above.

3. Equipment Under Test (EUT)

3.1. Identification of Equipment Under Test (EUT)

Brand Name:	Apple
Model Name or Number:	A1600
Test Sample IMEI:	352025060274538 *(Conducted Sample)*
Hardware Version Number:	REV1.0
Software Version Number:	iOS 12A314 BB: 3.08.08
FCC ID:	BCGA1600

Brand Name:	Apple
Model Name or Number:	A1600
Test Sample IMEI:	352025060238798 *(Radiated Sample)*
Hardware Version Number:	REV1.0
Software Version Number:	iOS 12A314 BB: 3.08.08
FCC ID:	BCGA1600

3.2. Description of EUT

The Equipment Under Test was a tablet with GSM/GPRS/EGPRS/UMTS/LTE and CDMA technologies. It also supports IEEE 802.11a/b/g/n (MIMO 2x2) and *Bluetooth*®. The rechargeable battery is not user accessible.

3.3. Modifications Incorporated in the EUT

No modifications were applied to the EUT during testing.

3.4. Additional Information Related to Testing

Tested Technology:	LTE		
Type of Equipment	Transceiver		
Power Supply Requirement(s):	Nominal	3.8 VDC	
	Minimum	3.4 VDC	
	Maximum	4.2 VDC	
Modulation Type:	QPSK & 16QAM		
Duty Cycle:	100 %		
Channel Bandwidth:	1.4 MHz, 3 MHz, 5 MHz & 10 MHz		
Antenna Gain:	-5.07 dBd		
Transmit Frequency Range:	814 MHz to 824 MHz		
Channels Tested:	**Channel Bandwidth (MHz)**	**N_{ul}**	**Frequency of Uplink (MHz)**
Bottom Channel	1.4	26697	814.7
	3	26705	815.5
	5	26715	816.5
Middle Channel	10	26740	819.0
Top Channel	1.4	26783	823.3
	3	26775	822.5
	5	26765	821.5

3.5. Support Equipment

The following support equipment was used to exercise the EUT during testing:

Brand Name:	Dell
Description:	Laptop computer
Model Name or Number:	Inspiron
Serial Number:	Asset RFI00788

Brand Name:	Not stated
Description:	USB Diagnostic cable
Model Name or Number:	Not stated
Serial Number:	Not stated

Brand Name:	Apple
Description:	Test Laptop
Model Name or Number:	MacBook Pro
Serial Number:	C2QLQ03XF9F2

Brand Name:	Apple
Description:	USB Cable
Model Name or Number:	A1480
Serial Number:	Not stated

Brand Name:	Apple
Description:	USB Charger
Model Name or Number:	A1399
Serial Number:	Not stated

Brand Name:	Apple
Description:	PHF
Model Name or Number:	Apple Ear Plugs
Serial Number:	Not stated

4. Operation and Monitoring of the EUT during Testing

4.1. Operating Modes

The EUT was tested in the following operating mode(s):

- Transmit Mode - The EUT was set to transmit with maximum output power using the required channel bandwidth. QPSK and 16QAM modulations were both tested, with Resource Block allocation as detailed in section 4.3.

4.2. Configuration and Peripherals

The EUT was tested in the following configuration(s):

- The EUT was connected to a Rohde and Schwarz CMW500 LTE system simulator, operating in a transceiver mode.
- Transmitter radiated spurious emissions tests were performed with the EUT was set to transmit with a 1.4 MHz channel bandwidth with QPSK modulation applied and 1 resource block with 0 offset. This was found to be the worst case modulation scheme with regards to emissions after preliminary investigations and, as this mode emits the highest transmit output power level, it was deemed to be the worst case.
- Transmitter radiated spurious emissions tests were performed with the AC Charger and PHF connected to the EUT as this was found to be the worst case during pre-scans. All the accessories were individually connected and measurements made during the pre-scans to determine the worst case combination.
- Conducted measurements at temperature and voltage extremes were performed using a conducted sample supplied by the customer. Short 4-wire DC flying leads were connected internally to the device in place of the battery, and exited through a hole in the casing. These leads were then extended to a DC power supply for testing purposes.
- For conducted cellular measurements, the RF conducted port was created by removing a micro connector from the pcb antenna and extending it with a short flexible microstrip supplied by the customer. This microstrip exited the device through a hole in the casing and was terminated in a proprietary micro-coax to SMA adaptor.
- The conducted sample with IMEI 352025060274538 was used for frequency stability, occupied bandwidth and power measurements.
- The radiated sample with IMEI 352025060238789 was used for radiated emissions measurements.

4.3. Resource Block Allocation

Channel Bandwidth (MHz)	Maximum No. of Resource Blocks	Resource Block / Offset Number							
		Sub Test 1		Sub Test 2		Sub Test 3		Sub Test 4	
		RB	Offset	RB	Offset	RB	Offset	RB	Offset
1.4	6	1	0	1	5	3	2	6	0
3	15	1	0	1	14	8	4	15	0
5	25	1	0	1	24	12	6	25	0
10	50	1	0	1	49	25	12	50	0
15	75	1	0	1	74	36	18	75	0

Transmitter Output Power was carried out using sub tests 1, 2, 3 and 4, with both QPSK and 16QAM modulation schemes.

Transmitter Occupied Bandwidth was carried out using sub tests 3 and 4, for both QPSK and 16QAM modulation schemes.

Transmitter Radiated Emissions testing was carried out using sub test 1, with a 1.4 MHz channel bandwidth and QPSK modulation scheme, as this was found to be the worst case modulation schemes with regards to emissions after preliminary investigations and, as this mode emits the highest transmit output power level, it was deemed to be the worst case.

Transmitter Radiated Band Edge Emissions was tested with sub test 4 on all supported channel bandwidths, using QPSK and 16QAM modulations with the maximum resource blocks settings.

Transmitter Frequency Stability test was carried out with sub test 4, with a channel bandwidth of 1.4 MHz only.

5. Measurements, Examinations and Derived Results

5.1. General Comments

Measurement uncertainties are evaluated in accordance with current best practice. Our reported expanded uncertainties are based on standard uncertainties, which are multiplied by an appropriate coverage factor to provide a statistical confidence level of approximately 95%. Please refer to *Section 6* for Measurement Uncertainty details.

In accordance with UKAS requirements all the measurement equipment is on a calibration schedule. All equipment was within the calibration period on the date of testing.

5.2. Test Results

5.2.1. Transmitter Carrier Output Power and Effective Radiated Power (ERP)

Test Summary:

Test Engineer:	Keith Tucker	**Test Date:**	31 July 2014
Test Sample IMEI:	352025060274538		

FCC Reference:	Parts 90.635(b) and 2.1046
Test Method Used:	As detailed in KDB 971168 Section 5.2.3

Environmental Conditions:

Temperature (℃):	25
Relative Humidity (%):	34

Note(s):

1. The customer stated that the EUT has a maximum antenna gain of -2.92 dBi. As the limit is ERP, the gain in dBi has been converted to dBd. The dBd gain figure has been calculated as:

   -2.92 dBi – 2.15 dB = -5.07 dBd

2. Measurements were performed with the EUT transmitting with QPSK and 16QAM modulation schemes, with resource blocks settings as detailed in section 4.3 of this report.
3. The conducted RF port of the EUT was connected to the power meter via an RF cable and directional coupler network. An RF level offset was used to compensate for the path loss of the coupler and RF cable.

Transmitter Carrier Output Power and Effective Radiated Power (ERP) (continued)

Results: 1.4 MHz Channel Bandwidth / Bottom Channel / QPSK

Frequency (MHz)	Resource Block(s)	Resource Block Offset	Conducted RF Power (dBm)	Antenna Gain (dBd)	ERP (dBm)	ERP Limit (dBm)	Margin (dB)	Result
814.7	6	0	22.3	-5.07	17.23	50.0	32.77	Complied
814.7	3	2	23.2	-5.07	18.13	50.0	31.87	Complied
814.7	1	0	23.3	-5.07	18.23	50.0	31.77	Complied
814.7	1	5	23.3	-5.07	18.23	50.0	31.77	Complied

Results: 1.4 MHz Channel Bandwidth / Bottom Channel / 16QAM

Frequency (MHz)	Resource Block(s)	Resource Block Offset	Conducted RF Power (dBm)	Antenna Gain (dBd)	ERP (dBm)	ERP Limit (dBm)	Margin (dB)	Result
814.7	6	0	21.3	-5.07	16.23	50.0	33.77	Complied
814.7	3	2	22.2	-5.07	17.13	50.0	32.87	Complied
814.7	1	0	22.2	-5.07	17.13	50.0	32.87	Complied
814.7	1	5	22.3	-5.07	17.23	50.0	32.77	Complied

Results: 1.4 MHz Channel Bandwidth / Middle Channel / QPSK

Frequency (MHz)	Resource Block(s)	Resource Block Offset	Conducted RF Power (dBm)	Antenna Gain (dBd)	ERP (dBm)	ERP Limit (dBm)	Margin (dB)	Result
819.0	6	0	22.4	-5.07	17.33	50.0	32.67	Complied
819.0	3	2	23.3	-5.07	18.23	50.0	31.77	Complied
819.0	1	0	23.3	-5.07	18.23	50.0	31.77	Complied
819.0	1	5	23.3	-5.07	18.23	50.0	31.77	Complied

Results: 1.4 MHz Channel Bandwidth / Middle Channel / 16QAM

Frequency (MHz)	Resource Block(s)	Resource Block Offset	Conducted RF Power (dBm)	Antenna Gain (dBd)	ERP (dBm)	ERP Limit (dBm)	Margin (dB)	Result
819.0	6	0	21.3	-5.07	16.23	50.0	33.77	Complied
819.0	3	2	22.2	-5.07	17.13	50.0	32.87	Complied
819.0	1	0	22.3	-5.07	17.23	50.0	32.77	Complied
819.0	1	5	22.2	-5.07	17.13	50.0	32.87	Complied

Transmitter Carrier Output Power and Effective Radiated Power (ERP) (continued)

Results: 1.4 MHz Channel Bandwidth / Top Channel / QPSK

Frequency (MHz)	Resource Block(s)	Resource Block Offset	Conducted RF Power (dBm)	Antenna Gain (dBd)	ERP (dBm)	ERP Limit (dBm)	Margin (dB)	Result
823.3	6	0	22.3	-5.07	17.23	50.0	32.77	Complied
823.3	3	2	23.3	-5.07	18.23	50.0	31.77	Complied
823.3	1	0	23.3	-5.07	18.23	50.0	31.77	Complied
823.3	1	5	23.2	-5.07	18.13	50.0	31.87	Complied

Results: 1.4 MHz Channel Bandwidth / Top Channel / 16QAM

Frequency (MHz)	Resource Block(s)	Resource Block Offset	Conducted RF Power (dBm)	Antenna Gain (dBd)	ERP (dBm)	ERP Limit (dBm)	Margin (dB)	Result
823.3	6	0	21.3	-5.07	16.23	50.0	33.77	Complied
823.3	3	2	22.2	-5.07	17.13	50.0	32.87	Complied
823.3	1	0	22.2	-5.07	17.13	50.0	32.87	Complied
823.3	1	5	22.2	-5.07	17.13	50.0	32.87	Complied

Results: 3 MHz Channel Bandwidth / Bottom Channel / QPSK

Frequency (MHz)	Resource Block(s)	Resource Block Offset	Conducted RF Power (dBm)	Antenna Gain (dBd)	ERP (dBm)	ERP Limit (dBm)	Margin (dB)	Result
815.5	15	0	22.3	-5.07	17.23	50.0	32.77	Complied
815.5	8	4	22.3	-5.07	17.23	50.0	32.77	Complied
815.5	1	0	23.2	-5.07	18.13	50.0	31.87	Complied
815.5	1	14	23.3	-5.07	18.23	50.0	31.77	Complied

Results: 3 MHz Channel Bandwidth / Bottom Channel / 16QAM

Frequency (MHz)	Resource Block(s)	Resource Block Offset	Conducted RF Power (dBm)	Antenna Gain (dBd)	ERP (dBm)	ERP Limit (dBm)	Margin (dB)	Result
815.5	15	0	21.3	-5.07	16.23	50.0	33.77	Complied
815.5	8	4	21.4	-5.07	16.33	50.0	33.67	Complied
815.5	1	0	22.1	-5.07	17.03	50.0	32.97	Complied
815.5	1	14	22.2	-5.07	17.13	50.0	32.87	Complied

Transmitter Carrier Output Power and Effective Radiated Power (ERP) (continued)

Results: 3 MHz Channel Bandwidth / Middle Channel / QPSK

Frequency (MHz)	Resource Block(s)	Resource Block Offset	Conducted RF Power (dBm)	Antenna Gain (dBd)	ERP (dBm)	ERP Limit (dBm)	Margin (dB)	Result
819.0	15	0	22.3	-5.07	17.23	50.0	32.77	Complied
819.0	8	4	22.3	-5.07	17.23	50.0	32.77	Complied
819.0	1	0	23.3	-5.07	18.23	50.0	31.77	Complied
819.0	1	14	23.2	-5.07	18.13	50.0	31.87	Complied

Results: 3 MHz Channel Bandwidth / Middle Channel / 16QAM

Frequency (MHz)	Resource Block(s)	Resource Block Offset	Conducted RF Power (dBm)	Antenna Gain (dBd)	ERP (dBm)	ERP Limit (dBm)	Margin (dB)	Result
819.0	15	0	21.3	-5.07	16.23	50.0	33.77	Complied
819.0	8	4	21.4	-5.07	16.33	50.0	33.67	Complied
819.0	1	0	22.2	-5.07	17.13	50.0	32.87	Complied
819.0	1	14	22.2	-5.07	17.13	50.0	32.87	Complied

Results: 3 MHz Channel Bandwidth / Top Channel / QPSK

Frequency (MHz)	Resource Block(s)	Resource Block Offset	Conducted RF Power (dBm)	Antenna Gain (dBd)	ERP (dBm)	ERP Limit (dBm)	Margin (dB)	Result
822.5	15	0	22.3	-5.07	17.23	50.0	32.77	Complied
822.5	8	4	22.4	-5.07	17.33	50.0	32.67	Complied
822.5	1	0	23.3	-5.07	18.23	50.0	31.77	Complied
822.5	1	14	23.3	-5.07	18.23	50.0	31.77	Complied

Results: 3 MHz Channel Bandwidth / Top Channel / 16QAM

Frequency (MHz)	Resource Block(s)	Resource Block Offset	Conducted RF Power (dBm)	Antenna Gain (dBd)	ERP (dBm)	ERP Limit (dBm)	Margin (dB)	Result
822.5	15	0	21.3	-5.07	16.23	50.0	33.77	Complied
822.5	8	4	21.4	-5.07	16.33	50.0	33.67	Complied
822.5	1	0	22.2	-5.07	17.13	50.0	32.87	Complied
822.5	1	14	22.2	-5.07	17.13	50.0	32.87	Complied

Transmitter Carrier Output Power and Effective Radiated Power (ERP) (continued)

Results: 5 MHz Channel Bandwidth / Bottom Channel / QPSK

Frequency (MHz)	Resource Block(s)	Resource Block Offset	Conducted RF Power (dBm)	Antenna Gain (dBd)	ERP (dBm)	ERP Limit (dBm)	Margin (dB)	Result
816.5	25	0	22.2	-5.07	17.13	50.0	32.87	Complied
816.5	12	6	22.3	-5.07	17.23	50.0	32.77	Complied
816.5	1	0	23.2	-5.07	18.13	50.0	31.87	Complied
816.5	1	24	23.3	-5.07	18.23	50.0	31.77	Complied

Results: 5 MHz Channel Bandwidth / Bottom Channel / 16QAM

Frequency (MHz)	Resource Block(s)	Resource Block Offset	Conducted RF Power (dBm)	Antenna Gain (dBd)	ERP (dBm)	ERP Limit (dBm)	Margin (dB)	Result
816.5	25	0	21.2	-5.07	16.13	50.0	33.87	Complied
816.5	12	6	21.3	-5.07	16.23	50.0	33.77	Complied
816.5	1	0	22.0	-5.07	16.93	50.0	33.07	Complied
816.5	1	24	22.1	-5.07	17.03	50.0	32.97	Complied

Results: 5 MHz Channel Bandwidth / Middle Channel / QPSK

Frequency (MHz)	Resource Block(s)	Resource Block Offset	Conducted RF Power (dBm)	Antenna Gain (dBd)	ERP (dBm)	ERP Limit (dBm)	Margin (dB)	Result
819.0	25	0	22.2	-5.07	17.13	50.0	32.87	Complied
819.0	12	6	22.3	-5.07	17.23	50.0	32.77	Complied
819.0	1	0	23.2	-5.07	18.13	50.0	31.87	Complied
819.0	1	24	23.1	-5.07	18.03	50.0	31.97	Complied

Results: 5 MHz Channel Bandwidth / Middle Channel / 16QAM

Frequency (MHz)	Resource Block(s)	Resource Block Offset	Conducted RF Power (dBm)	Antenna Gain (dBd)	ERP (dBm)	ERP Limit (dBm)	Margin (dB)	Result
819.0	25	0	21.2	-5.07	16.13	50.0	33.87	Complied
819.0	12	6	21.3	-5.07	16.23	50.0	33.77	Complied
819.0	1	0	22.1	-5.07	17.03	50.0	32.97	Complied
819.0	1	24	22.0	-5.07	16.93	50.0	33.07	Complied

Transmitter Carrier Output Power and Effective Radiated Power (ERP) (continued)

Results: 5 MHz Channel Bandwidth / Top Channel / QPSK

Frequency (MHz)	Resource Block(s)	Resource Block Offset	Conducted RF Power (dBm)	Antenna Gain (dBd)	ERP (dBm)	ERP Limit (dBm)	Margin (dB)	Result
821.5	25	0	22.3	-5.07	17.23	50.0	32.77	Complied
821.5	12	6	22.2	-5.07	17.13	50.0	32.87	Complied
821.5	1	0	23.2	-5.07	18.13	50.0	31.87	Complied
821.5	1	24	23.2	-5.07	18.13	50.0	31.87	Complied

Results: 5 MHz Channel Bandwidth / Top Channel / 16QAM

Frequency (MHz)	Resource Block(s)	Resource Block Offset	Conducted RF Power (dBm)	Antenna Gain (dBd)	ERP (dBm)	ERP Limit (dBm)	Margin (dB)	Result
821.5	25	0	21.2	-5.07	16.13	50.0	33.87	Complied
821.5	12	6	21.2	-5.07	16.13	50.0	33.87	Complied
821.5	1	0	22.1	-5.07	17.03	50.0	32.97	Complied
821.5	1	24	22.0	-5.07	16.93	50.0	33.07	Complied

Results: 10 MHz Channel Bandwidth / Middle Channel / QPSK

Frequency (MHz)	Resource Block(s)	Resource Block Offset	Conducted RF Power (dBm)	Antenna Gain (dBd)	ERP (dBm)	ERP Limit (dBm)	Margin (dB)	Result
819.0	50	0	22.1	-5.07	17.03	50.0	32.97	Complied
819.0	25	12	22.2	-5.07	17.13	50.0	32.87	Complied
819.0	1	0	23.3	-5.07	18.23	50.0	31.77	Complied
819.0	1	49	23.2	-5.07	18.13	50.0	31.87	Complied

Results: 10 MHz Channel Bandwidth / Middle Channel / 16QAM

Frequency (MHz)	Resource Block(s)	Resource Block Offset	Conducted RF Power (dBm)	Antenna Gain (dBd)	ERP (dBm)	ERP Limit (dBm)	Margin (dB)	Result
819.0	50	0	21.1	-5.07	16.03	50.0	33.97	Complied
819.0	25	12	21.3	-5.07	16.23	50.0	33.77	Complied
819.0	1	0	22.2	-5.07	17.13	50.0	32.87	Complied
819.0	1	49	22.1	-5.07	17.03	50.0	32.97	Complied

Transmitter Carrier Output Power and Effective Radiated Power (ERP) (continued)

Test Equipment Used:

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M1658	Thermohygrometer	JM Handelspunkt	30.5015.13	None stated	14 Mar 2015	12
M1871	Power Meter	Agilent	N1911A	MY45100338	28 May 2015	12
M1872	Wideband Power Sensor	Agilent	N1921A	MY45241950	08 Oct 2014	12
S0537	DC Power Supply	TTi	EL302D	249928	Calibrated before use	-
M1251	Digital Multimeter	Fluke	175	89170179	19 May 2015	12
A2535	Directional Coupler	AtlanTec RF	CDC-003060-20	14041701719	Calibrated before use	-
A2508	Attenuator	AtlanTec RF	AN18-10	821846#3	Calibrated before use	-
A539	Power Splitter	Rohde & Schwarz	RVZ	22441	Calibrated before use	-

5.2.2. Transmitter Occupied Bandwidth

Test Summary:

Test Engineer:	Keith Tucker	**Test Date:**	17 July 2014
Test Sample IMEI:	352025060274538		

FCC Reference:	Parts 90.209(b)(7) and 2.1049
Test Method Used:	As detailed in KDB 971168 Section 4.2

Environmental Conditions:

Temperature (℃):	25
Relative Humidity (%):	45

Note(s):

1. Occupied bandwidth (99% bandwidth) was measured using a test receiver occupied bandwidth function.
2. Measurements were performed with the EUT transmitting with QPSK and 16QAM modulation schemes, with resource block settings as detailed in section 4.3 of this report.
3. The test receiver was connected to the RF port on the EUT using suitable attenuation and RF cable.

Transmitter Occupied Bandwidth (continued)

Results: 1.4 MHz Channel Bandwidth / Bottom Channel / QPSK

Frequency (MHz)	Resource Blocks	Resource Block Offset	Resolution Bandwidth (kHz)	Video Bandwidth (kHz)	Occupied Bandwidth (MHz)
814.7	6	0	20	100	1.094
814.7	3	2	20	100	0.579

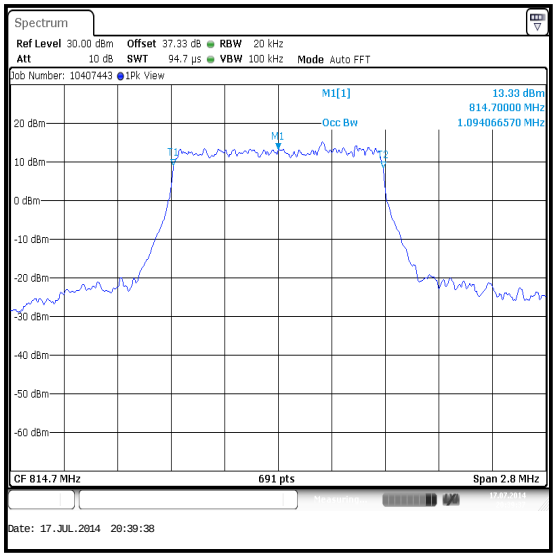

QPSK / 6 Resource Blocks (0 Offset)

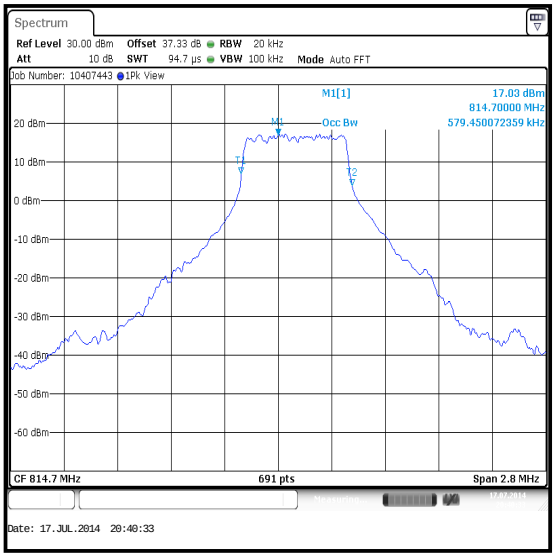

QPSK / 3 Resource Blocks (2 Offset)

Transmitter Occupied Bandwidth (continued)

Results: 1.4 MHz Channel Bandwidth / Bottom Channel / 16QAM

Frequency (MHz)	Resource Blocks	Resource Block Offset	Resolution Bandwidth (kHz)	Video Bandwidth (kHz)	Occupied Bandwidth (MHz)
814.7	6	0	20	100	1.082
814.7	3	2	20	100	0.579

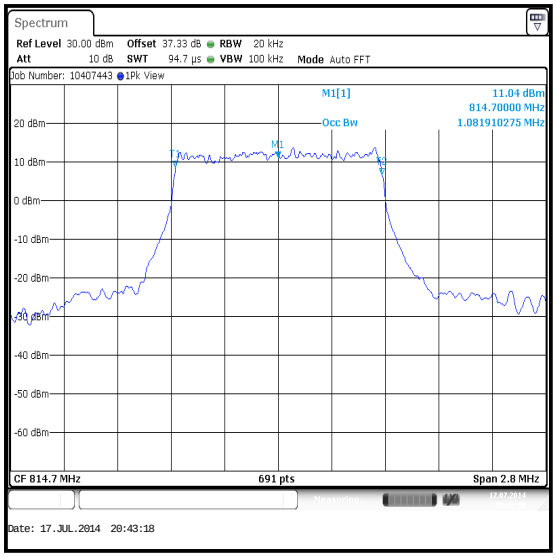

16QAM / 6 Resource Blocks (0 Offset)

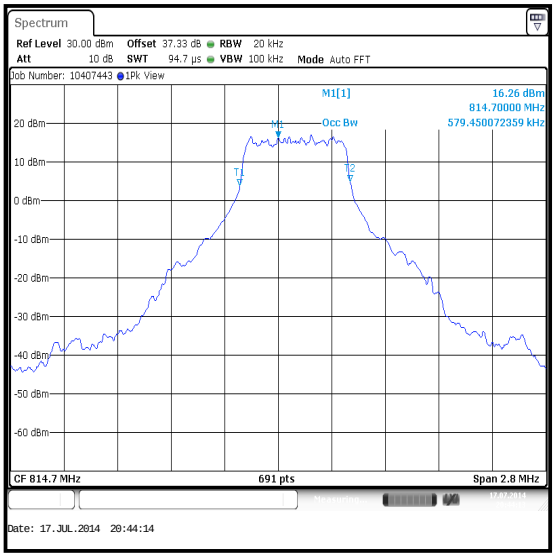

16QAM / 3 Resource Blocks (2 Offset)

Transmitter Occupied Bandwidth (continued)

Results: 1.4 MHz Channel Bandwidth / Middle Channel / QPSK

Frequency (MHz)	Resource Blocks	Resource Block Offset	Resolution Bandwidth (kHz)	Video Bandwidth (kHz)	Occupied Bandwidth (MHz)
819.0	6	0	20	100	1.094
819.0	3	2	20	100	0.575

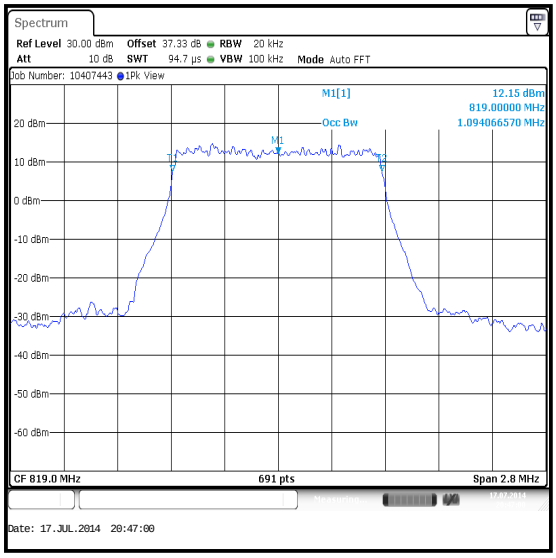

QPSK / 6 Resource Blocks (0 Offset)

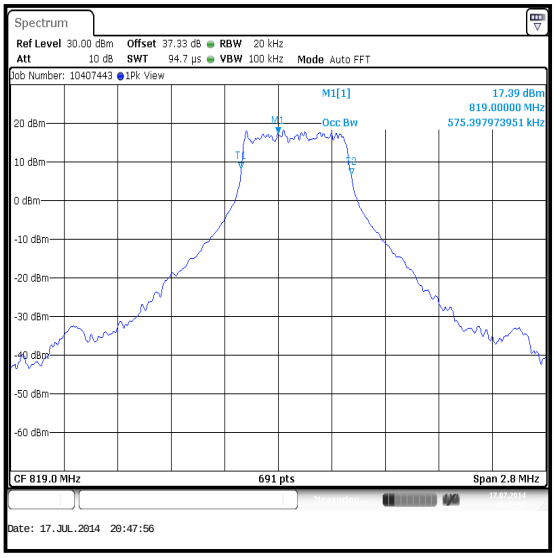

QPSK / 3 Resource Blocks (2 Offset)

Transmitter Occupied Bandwidth (continued)

Results: 1.4 MHz Channel Bandwidth / Middle Channel / 16QAM

Frequency (MHz)	Resource Blocks	Resource Block Offset	Resolution Bandwidth (kHz)	Video Bandwidth (kHz)	Occupied Bandwidth (MHz)
819.0	6	0	20	100	1.090
819.0	3	2	20	100	0.592

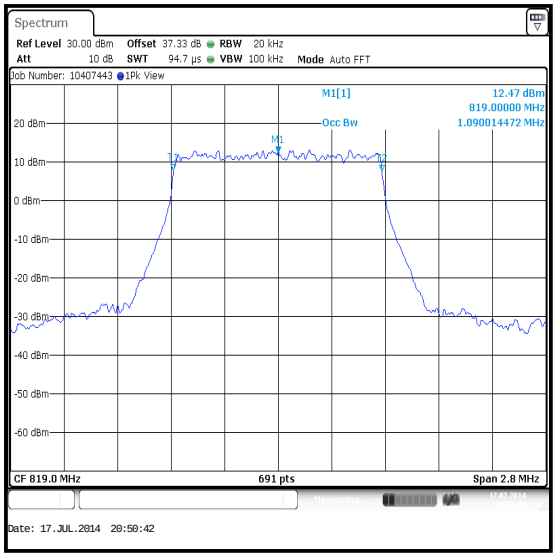

16QAM / 6 Resource Blocks (0 Offset)

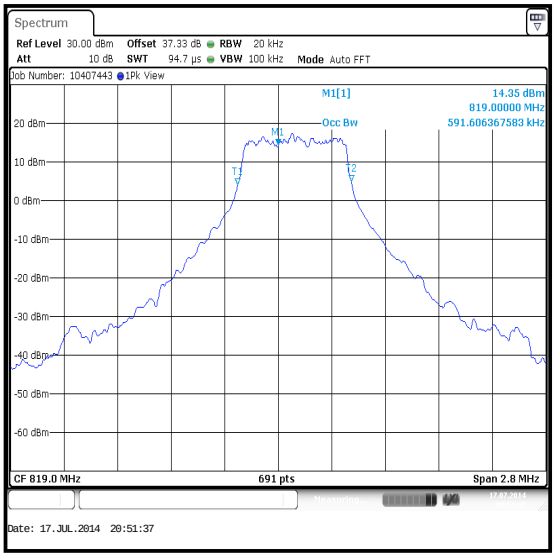

16QAM / 3 Resource Blocks (2 Offset)

Transmitter Occupied Bandwidth (continued)

Results: 1.4 MHz Channel Bandwidth / Top Channel / QPSK

Frequency (MHz)	Resource Blocks	Resource Block Offset	Resolution Bandwidth (kHz)	Video Bandwidth (kHz)	Occupied Bandwidth (MHz)
823.3	6	0	20	100	1.086
823.3	3	2	20	100	0.584

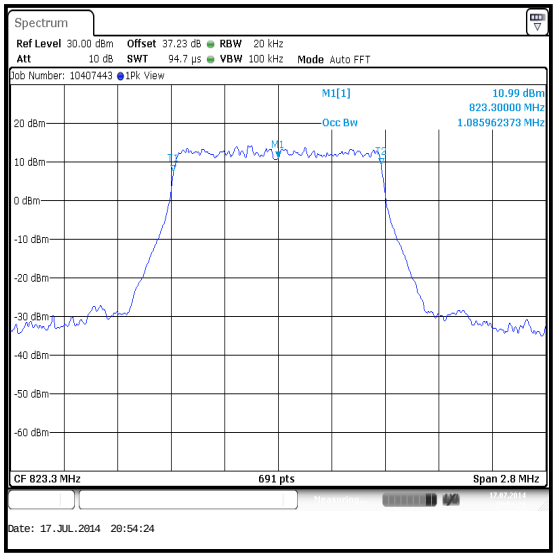

QPSK / 6 Resource Blocks (0 Offset)

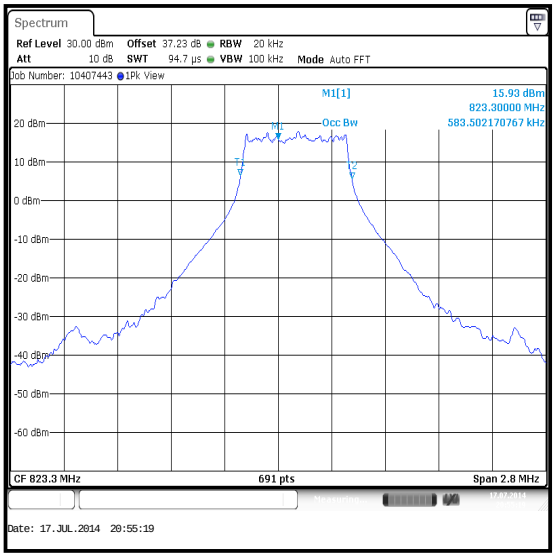

QPSK / 3 Resource Blocks (2 Offset)

Transmitter Occupied Bandwidth (continued)

Results: 1.4 MHz Channel Bandwidth / Top Channel / 16QAM

Frequency (MHz)	Resource Blocks	Resource Block Offset	Resolution Bandwidth (kHz)	Video Bandwidth (kHz)	Occupied Bandwidth (MHz)
823.3	6	0	20	100	1.094
823.3	3	2	20	100	0.579

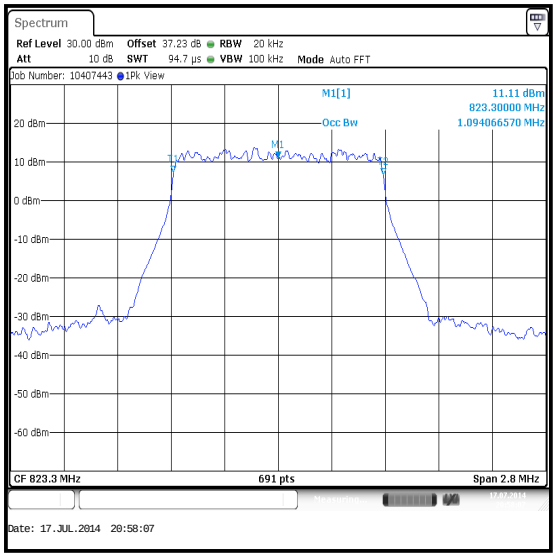

16QAM / 6 Resource Blocks (0 Offset)

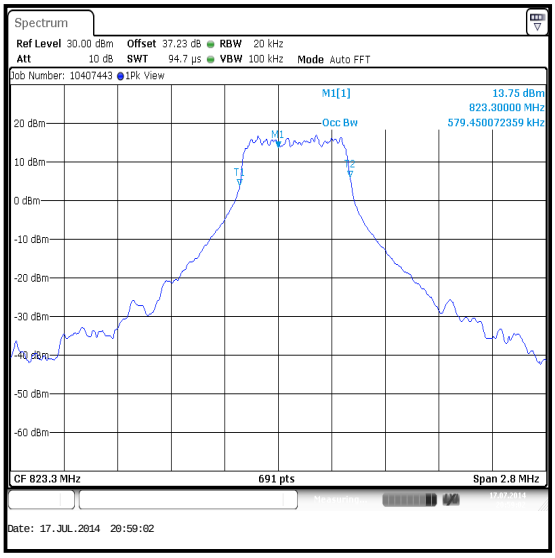

16QAM / 3 Resource Blocks (2 Offset)

Transmitter Occupied Bandwidth (continued)

Results: 3 MHz Channel Bandwidth / Bottom Channel / QPSK

Frequency (MHz)	Resource Blocks	Resource Block Offset	Resolution Bandwidth (kHz)	Video Bandwidth (kHz)	Occupied Bandwidth (MHz)
815.5	15	0	30	100	2.683
815.5	8	4	30	100	1.467

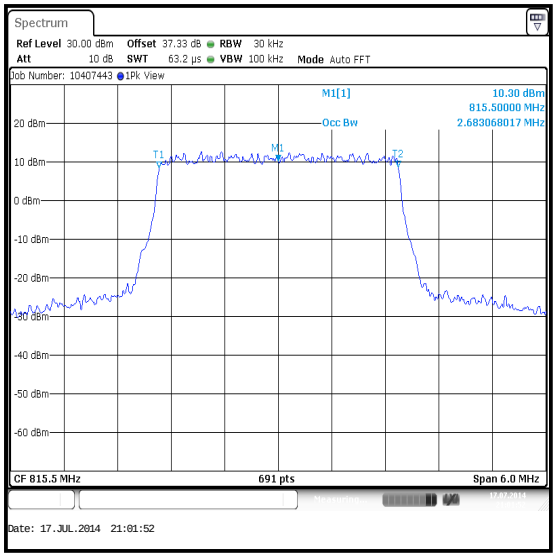

QPSK / 15 Resource Blocks (0 Offset)

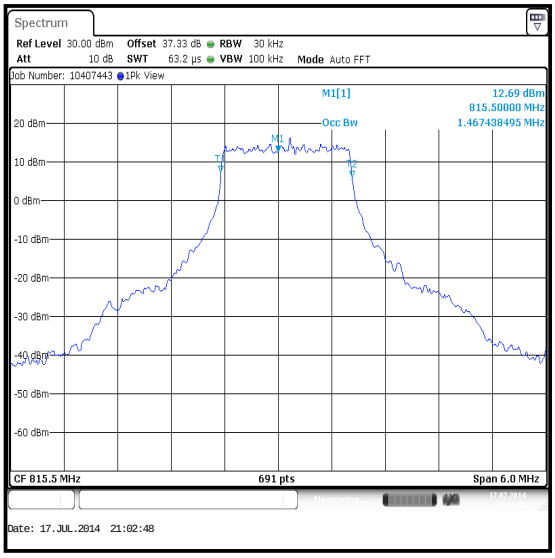

QPSK / 8 Resource Blocks (4 Offset)

Transmitter Occupied Bandwidth (continued)

Results: 3 MHz Channel Bandwidth / Bottom Channel / 16QAM

Frequency (MHz)	Resource Blocks	Resource Block Offset	Resolution Bandwidth (kHz)	Video Bandwidth (kHz)	Occupied Bandwidth (MHz)
815.5	15	0	30	100	2.692
815.5	8	4	30	100	1.467

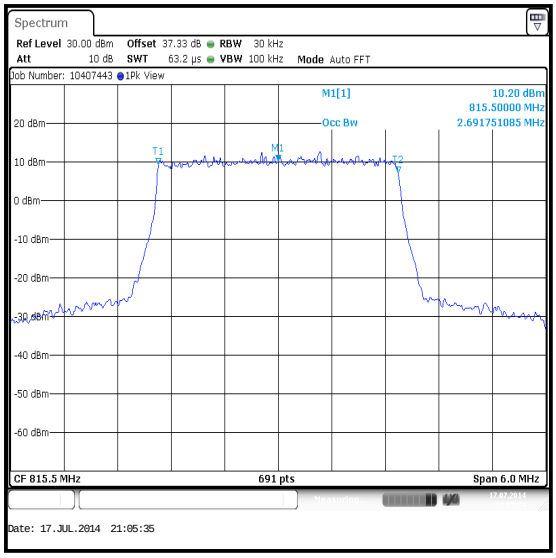

16QAM / 15 Resource Blocks (0 Offset)

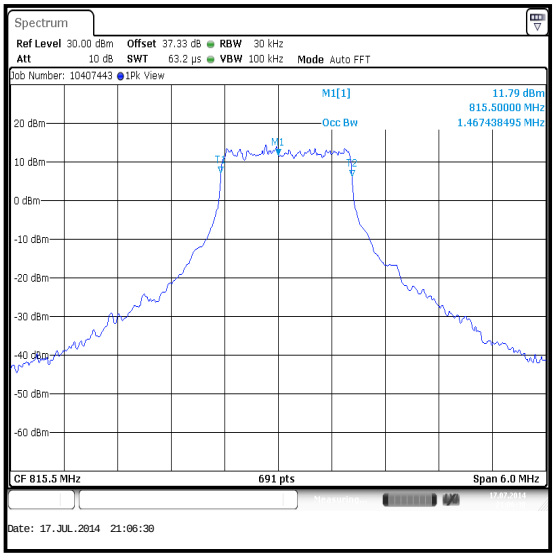

16QAM / 8 Resource Blocks (4 Offset)

Transmitter Occupied Bandwidth (continued)

Results: 3 MHz Channel Bandwidth / Middle Channel / QPSK

Frequency (MHz)	Resource Blocks	Resource Block Offset	Resolution Bandwidth (kHz)	Video Bandwidth (kHz)	Occupied Bandwidth (MHz)
819.0	15	0	30	100	2.692
819.0	8	4	30	100	1.467

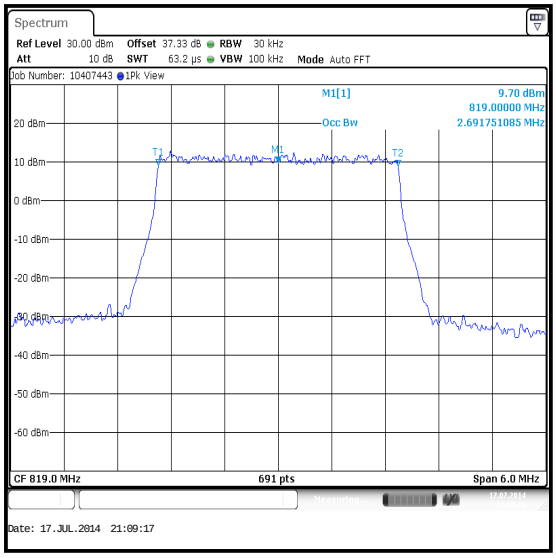

QPSK / 15 Resource Blocks (0 Offset)

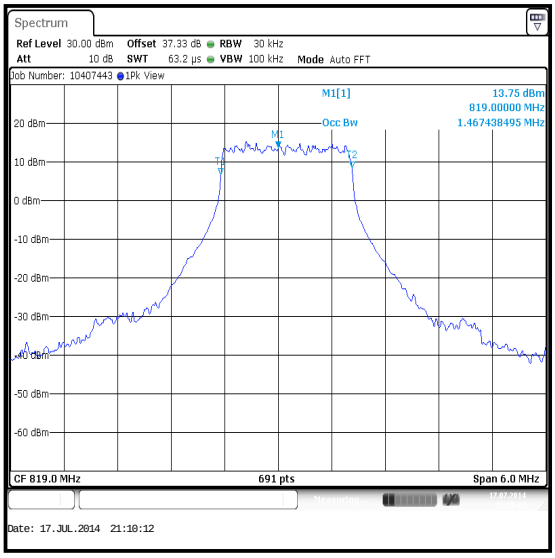

QPSK / 8 Resource Blocks (4 Offset)

Transmitter Occupied Bandwidth (continued)

Results: 3 MHz Channel Bandwidth / Middle Channel / 16QAM

Frequency (MHz)	Resource Blocks	Resource Block Offset	Resolution Bandwidth (kHz)	Video Bandwidth (kHz)	Occupied Bandwidth (MHz)
819.0	15	0	30	100	2.674
819.0	8	4	30	100	1.476

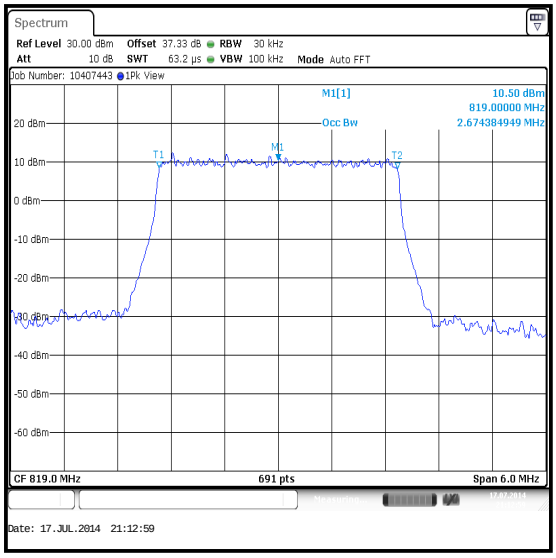

16QAM / 15 Resource Blocks (0 Offset)

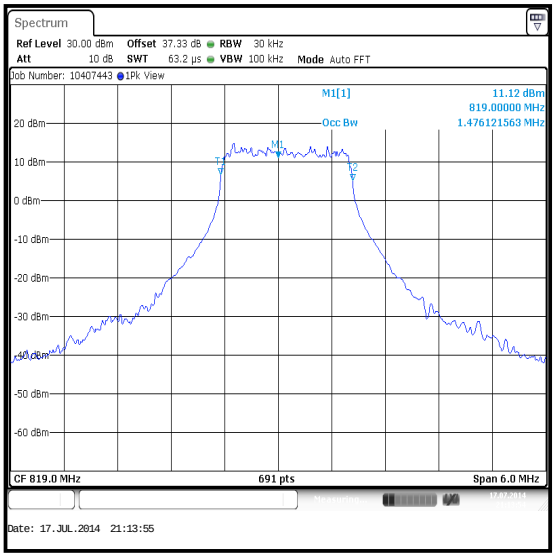

16QAM / 8 Resource Blocks (4 Offset)

Transmitter Occupied Bandwidth (continued)

Results: 3 MHz Channel Bandwidth / Top Channel / QPSK

Frequency (MHz)	Resource Blocks	Resource Block Offset	Resolution Bandwidth (kHz)	Video Bandwidth (kHz)	Occupied Bandwidth (MHz)
822.5	15	0	30	100	2.683
822.5	8	4	30	100	1.476

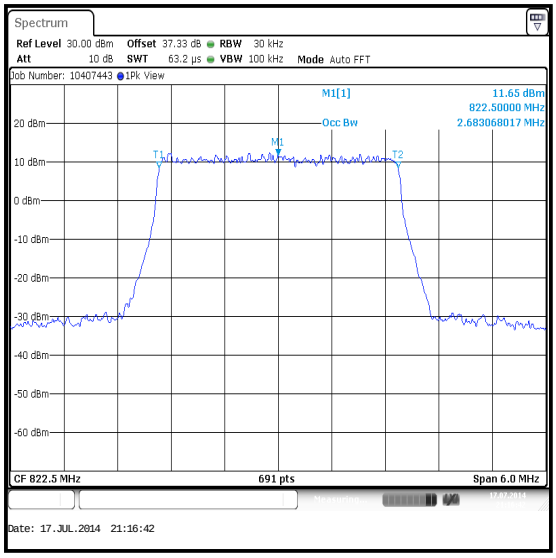

QPSK / 15 Resource Blocks (0 Offset)

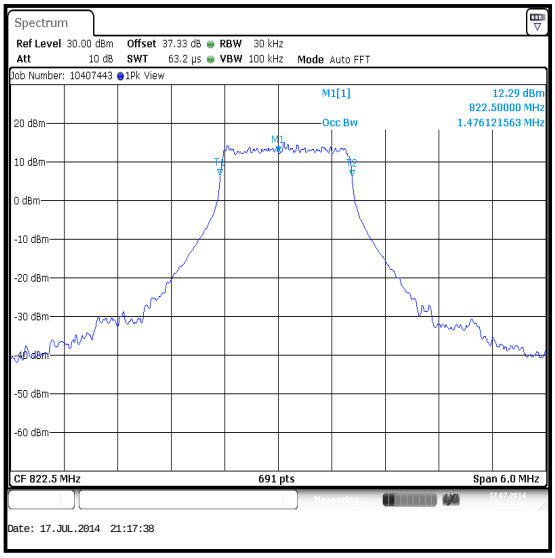

QPSK / 8 Resource Blocks (4 Offset)

Transmitter Occupied Bandwidth (continued)

Results: 3 MHz Channel Bandwidth / Top Channel / 16QAM

Frequency (MHz)	Resource Blocks	Resource Block Offset	Resolution Bandwidth (kHz)	Video Bandwidth (kHz)	Occupied Bandwidth (MHz)
822.5	15	0	30	100	2.700
822.5	8	4	30	100	1.485

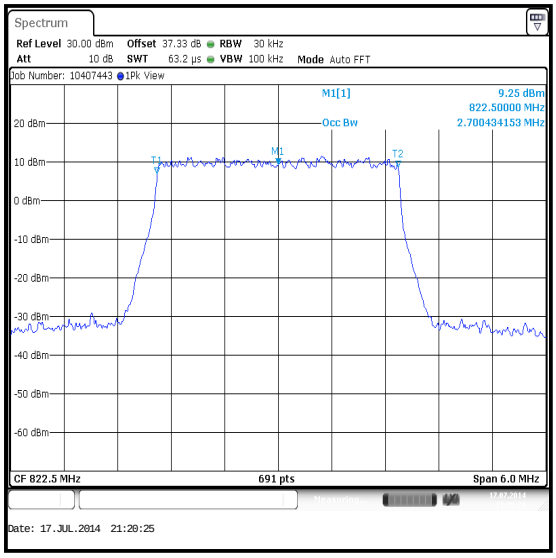

16QAM / 15 Resource Blocks (0 Offset)

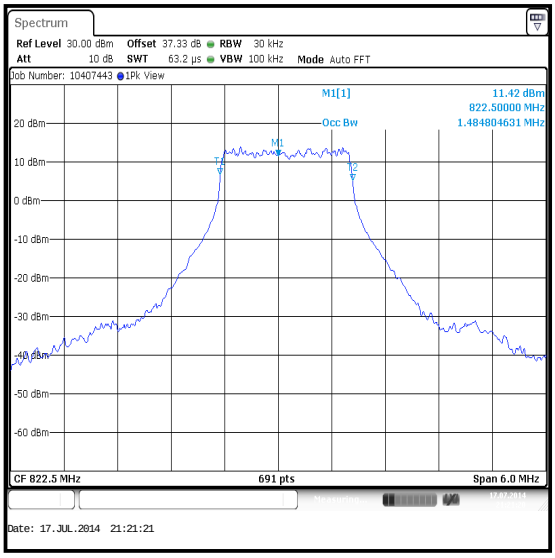

16QAM / 8 Resource Blocks (4 Offset)

Transmitter Occupied Bandwidth (continued)

Results: 5 MHz Channel Bandwidth / Bottom Channel / QPSK

Frequency (MHz)	Resource Blocks	Resource Block Offset	Resolution Bandwidth (kHz)	Video Bandwidth (kHz)	Occupied Bandwidth (MHz)
816.5	25	0	50	200	4.472
816.5	12	6	50	200	2.229

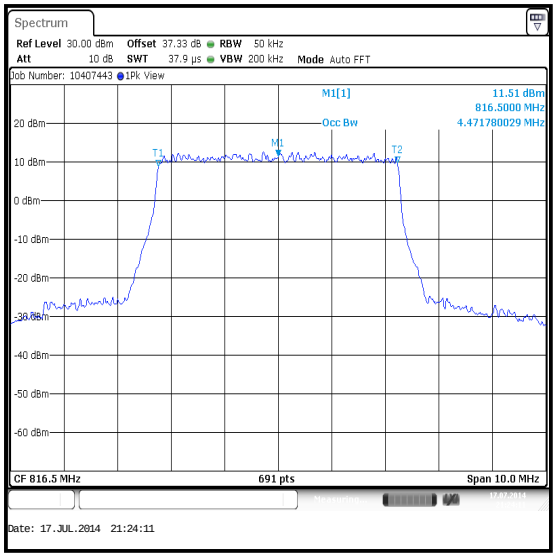

QPSK / 25 Resource Blocks (0 Offset)

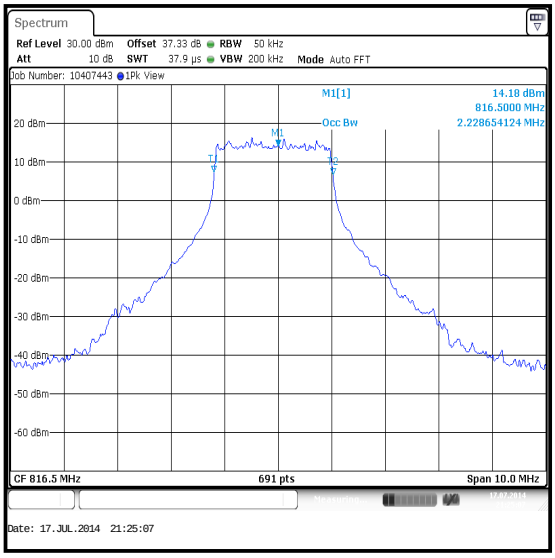

QPSK / 12 Resource Blocks (6 Offset)

Transmitter Occupied Bandwidth (continued)

Results: 5 MHz Channel Bandwidth / Bottom Channel / 16QAM

Frequency (MHz)	Resource Blocks	Resource Block Offset	Resolution Bandwidth (kHz)	Video Bandwidth (kHz)	Occupied Bandwidth (MHz)
816.5	25	0	50	200	4.486
816.5	12	6	50	200	2.214

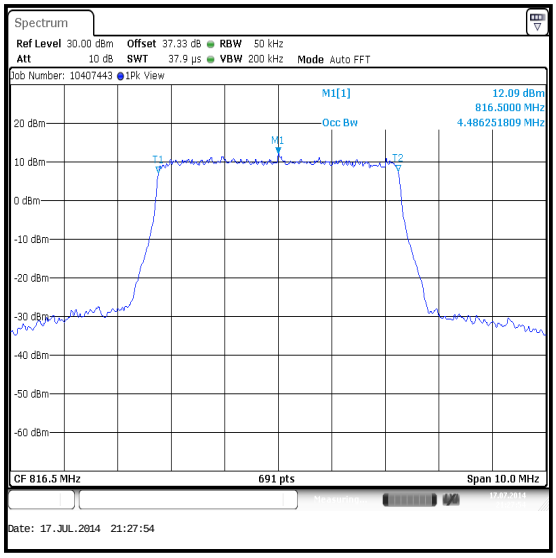

16QAM / 25 Resource Blocks (0 Offset)

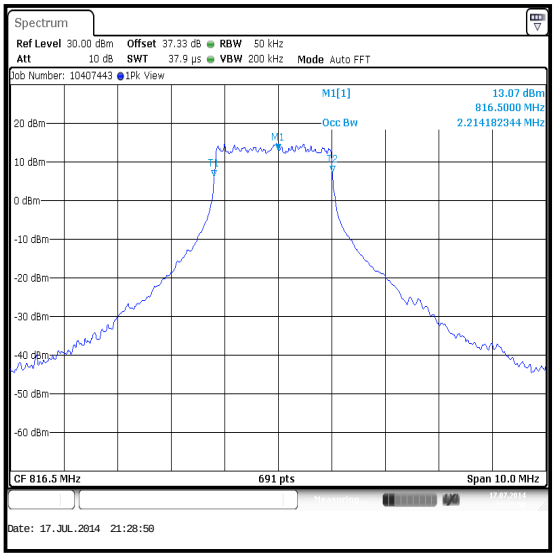

16QAM / 12 Resource Blocks (6 Offset)

Transmitter Occupied Bandwidth (continued)

Results: 5 MHz Channel Bandwidth / Middle Channel / QPSK

Frequency (MHz)	Resource Blocks	Resource Block Offset	Resolution Bandwidth (kHz)	Video Bandwidth (kHz)	Occupied Bandwidth (MHz)
819.0	25	0	50	200	4.486
819.0	12	6	50	200	2.200

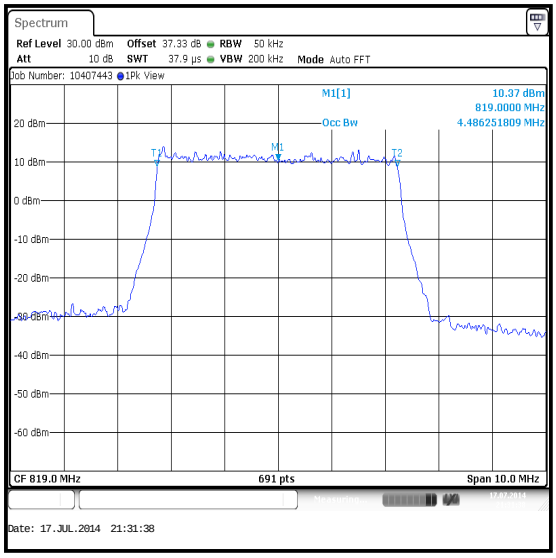

QPSK / 25 Resource Blocks (0 Offset)

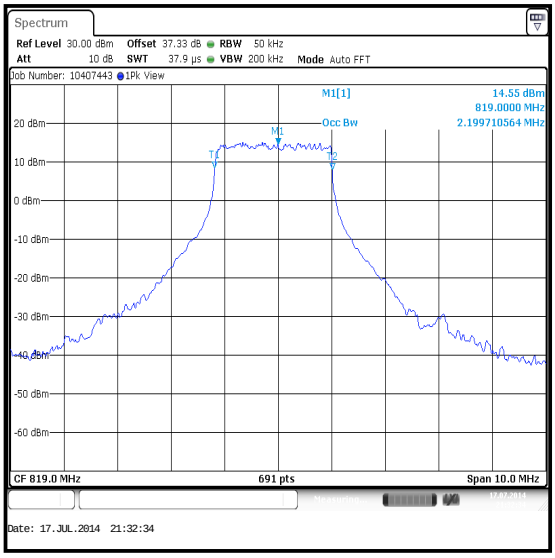

QPSK / 12 Resource Blocks (6 Offset)

Transmitter Occupied Bandwidth (continued)

Results: 5 MHz Channel Bandwidth / Middle Channel / 16QAM

Frequency (MHz)	Resource Blocks	Resource Block Offset	Resolution Bandwidth (kHz)	Video Bandwidth (kHz)	Occupied Bandwidth (MHz)
819.0	25	0	50	200	4.472
819.0	12	6	50	200	2.200

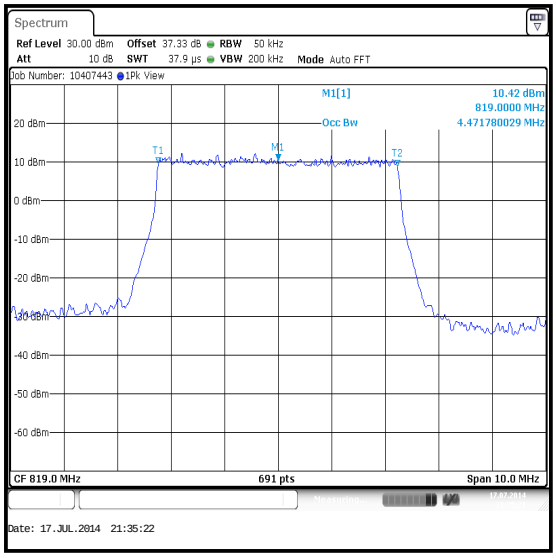

16QAM / 25 Resource Blocks (0 Offset)

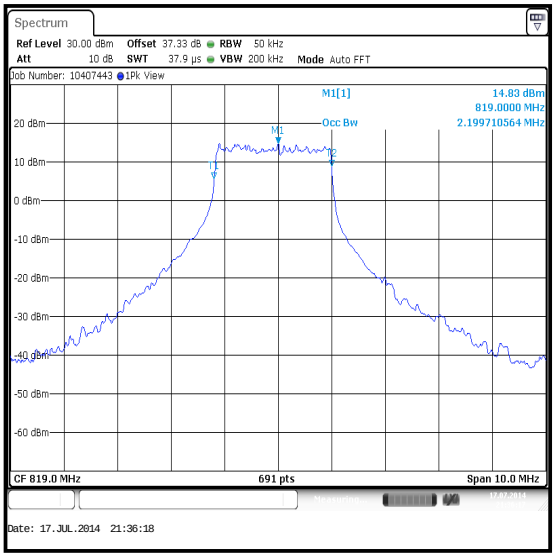

16QAM / 12 Resource Blocks (6 Offset)

Transmitter Occupied Bandwidth (continued)

Results: 5 MHz Channel Bandwidth / Top Channel / QPSK

Frequency (MHz)	Resource Blocks	Resource Block Offset	Resolution Bandwidth (kHz)	Video Bandwidth (kHz)	Occupied Bandwidth (MHz)
821.5	25	0	50	200	4.486
821.5	12	6	50	200	2.200

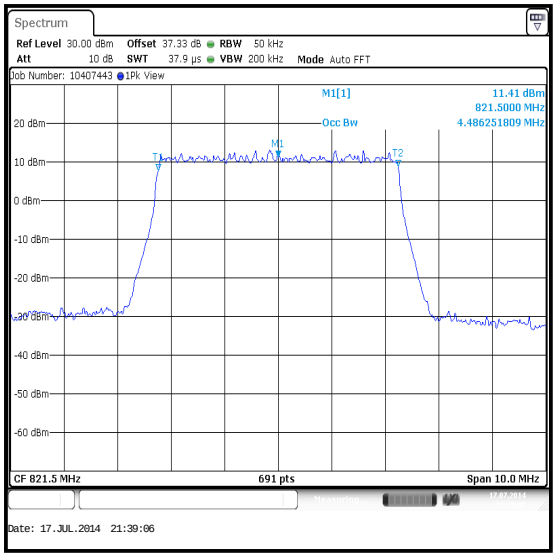

QPSK / 25 Resource Blocks (0 Offset)

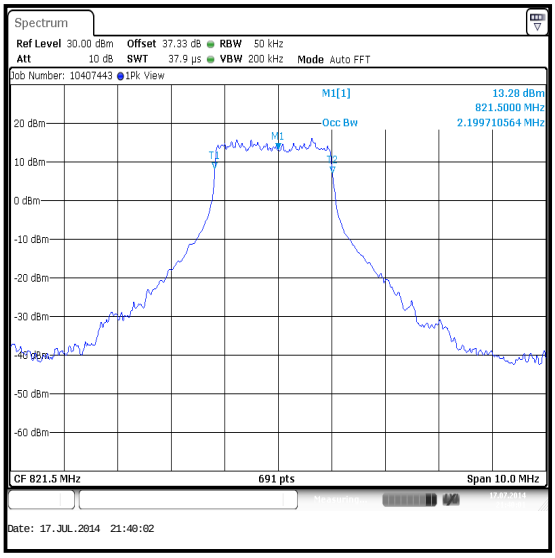

QPSK / 12 Resource Blocks (6 Offset)

Transmitter Occupied Bandwidth (continued)

Results: 5 MHz Channel Bandwidth / Top Channel / 16QAM

Frequency (MHz)	Resource Blocks	Resource Block Offset	Resolution Bandwidth (kHz)	Video Bandwidth (kHz)	Occupied Bandwidth (MHz)
821.5	25	0	50	200	4.486
821.5	12	6	50	200	2.214

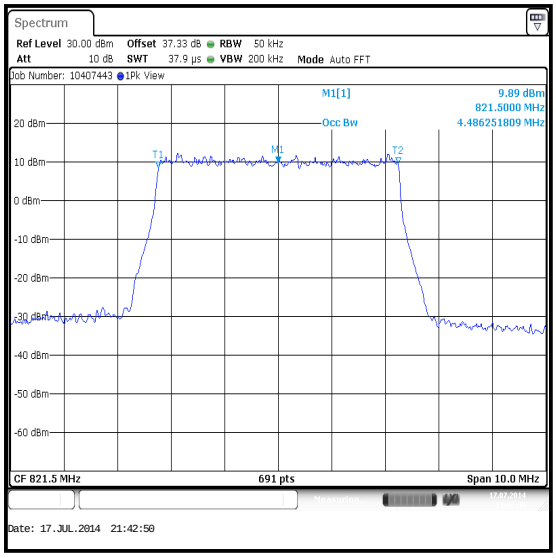

16QAM / 25 Resource Blocks (0 Offset)

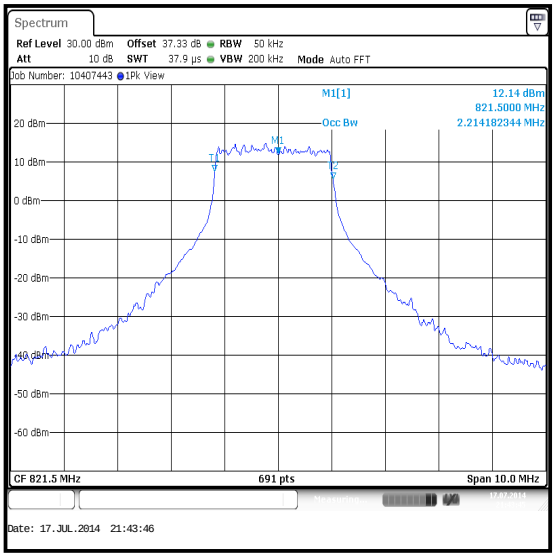

16QAM / 12 Resource Blocks (6 Offset)

Transmitter Occupied Bandwidth (continued)

Results: 10 MHz Channel Bandwidth / Middle Channel / QPSK

Frequency (MHz)	Resource Blocks	Resource Block Offset	Resolution Bandwidth (kHz)	Video Bandwidth (kHz)	Occupied Bandwidth (MHz)
819.0	50	0	100	300	8.944
819.0	25	12	100	300	4.602

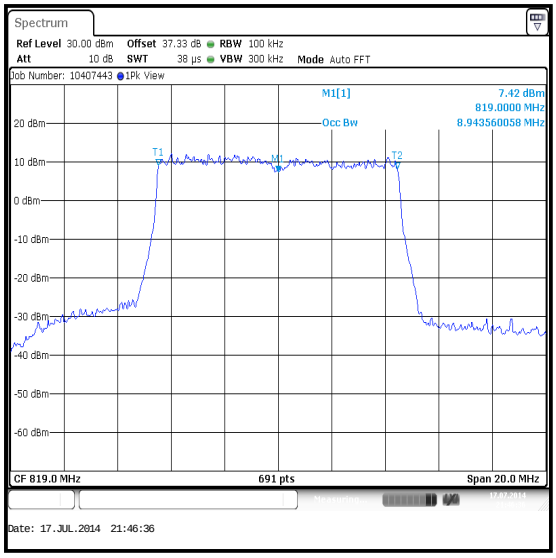

QPSK / 50 Resource Blocks (0 Offset)

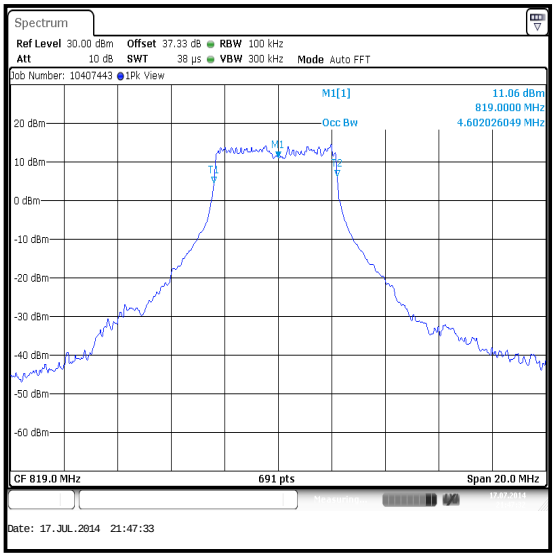

QPSK / 25 Resource Blocks (12 Offset)

Transmitter Occupied Bandwidth (continued)

Results: 10 MHz Channel Bandwidth / Middle Channel / 16QAM

Frequency (MHz)	Resource Blocks	Resource Block Offset	Resolution Bandwidth (kHz)	Video Bandwidth (kHz)	Occupied Bandwidth (MHz)
819.0	50	0	100	300	8.944
819.0	25	12	100	300	4.602

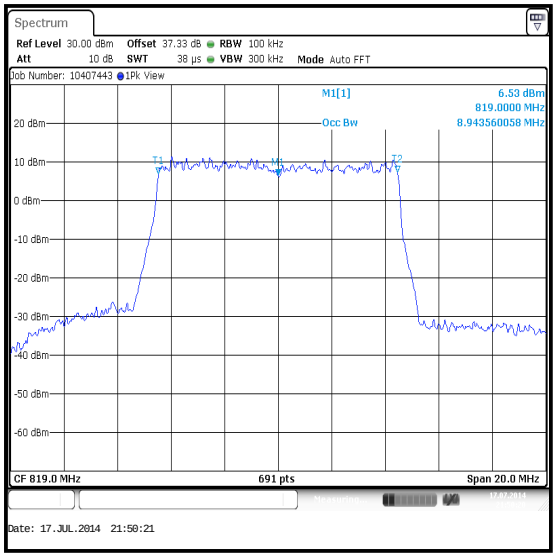

16QAM / 50 Resource Blocks (0 Offset)

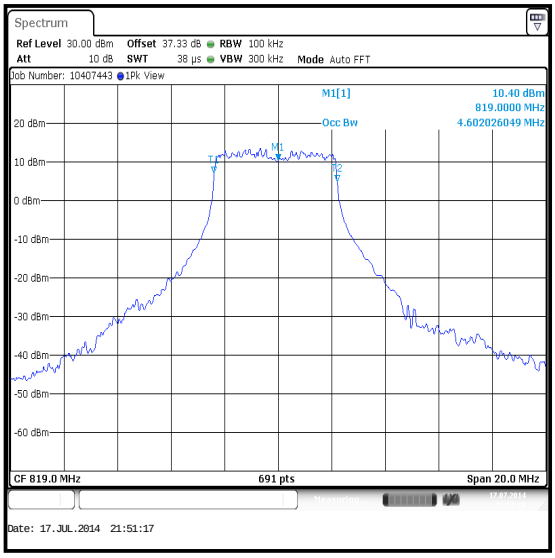

16QAM / 25 Resource Blocks (12 Offset)

Test Equipment Used:

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M1658	Thermohygrometer	JM Handelspunkt	30.5015.13	None stated	14 Mar 2015	12
L1127	Signal Analyser	Rohde & Schwarz	FSV13	100863	24 Apr 2015	12
S0537	DC Power Supply	TTi	EL302D	249928	Calibrated before use	-
M1251	Digital Multimeter	Fluke	175	89170179	19 May 2015	12
A2535	Directional Coupler	AtlanTec RF	CDC-003060-20	14041701719	Calibrated before use	-
A2508	Attenuator	AtlanTec RF	AN18-10	821846#3	Calibrated before use	-
A539	Power Splitter	Rohde & Schwarz	RVZ	22441	Calibrated before use	-

5.2.3. Transmitter Radiated Emissions

Test Summary:

Test Engineers:	David Doyle & Nick Steele	**Test Dates:**	06 August 2014 & 09 August 2014
Test Sample IMEI:	352025060238798		

FCC Reference:	Parts 90.691 and 2.1053
Test Method Used:	KDB 971168 Section 6.1 referencing FCC Part 2.1053
Frequency Range:	30 MHz to 9 GHz
Configuration:	1.4 MHz, QPSK, 1RB, 0 Offset

Environmental Conditions:

Temperature (℃):	22 to 23
Relative Humidity (%):	35 to 43

Note(s):

1. The EUT was set to transmit with a 1.4 MHz channel bandwidth with QPSK modulation applied and 1 resource block with 0 offset, as this was found to be the worst case modulation scheme with regards to emissions after preliminary investigations and, as this mode emits the highest transmit output power level, it was deemed to be the worst case.
2. The emission seen on the 30 MHz to 1 GHz plot at approximately 823.3 MHz is the EUT carrier.
3. All emissions shown on the pre-scan plots were investigated. Final measurements were made using appropriate RF filters and attenuators where required. All emissions shown on the pre-scan plots were found to be below the measurement system noise floor or ambient, therefore the highest peak noise floor reading of the measuring receiver was recorded in the table below.
4. Measurements below 1 GHz were performed in a semi-anechoic chamber (Asset Number K0001) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.
5. Pre-scans above 1 GHz were performed in a fully anechoic chamber (Asset Number K0002) at a distance of 3 metres. The EUT was placed at a height of 1.5 metres above the test chamber floor in the centre of the chamber turntable. All measurement antennas were placed at a fixed height of 1.5 metres above the test chamber floor, in line with the EUT. Final measurements above 1 GHz were performed in a semi-anechoic chamber (Asset Number K0001) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.

Results:

Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
3837.675	-37.6	-13.0	24.6	Complied

Transmitter Radiated Emissions (continued)

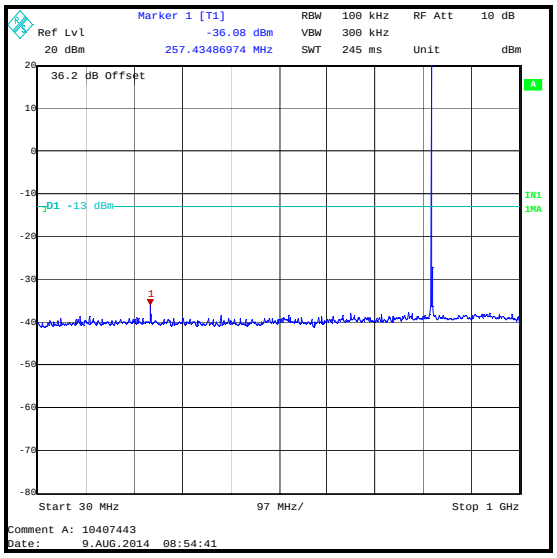

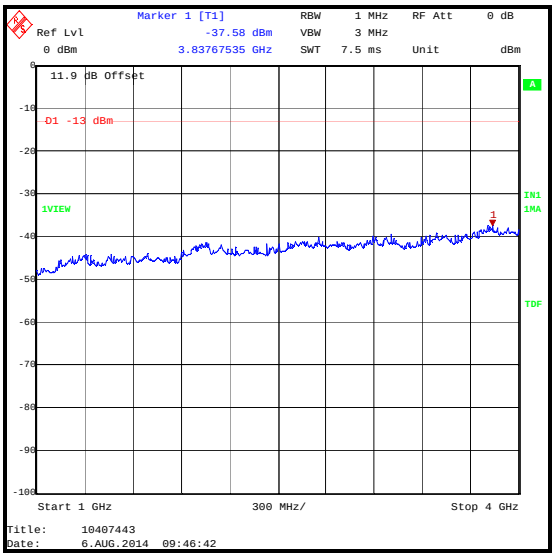

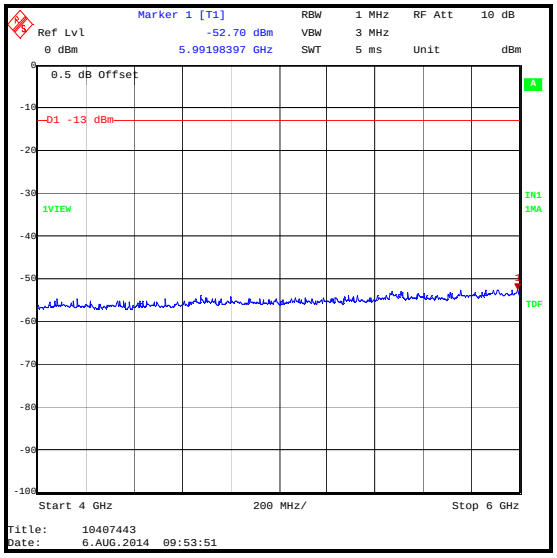

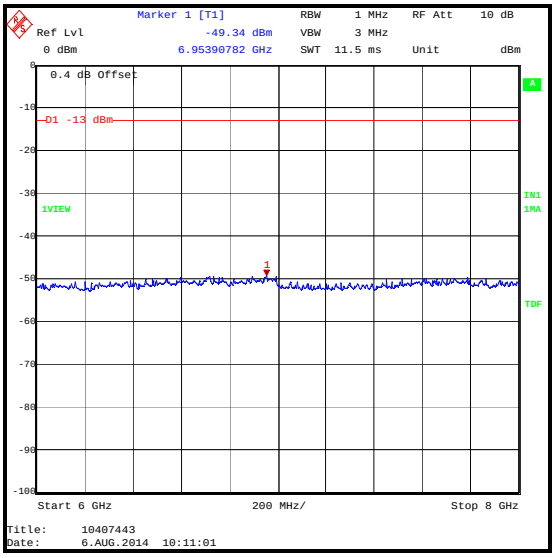

Transmitter Radiated Emissions (continued)

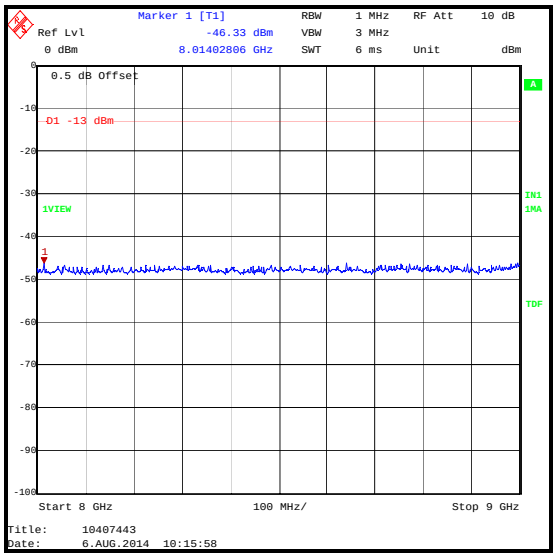

Test Equipment Used:

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M1622	Thermohygrometer	JM Handelspunkt	30.5015.06	None stated	31 Dec 2014	12
K0001	5m RSE Chamber	Rainford EMC	N/A	N/A	26 Nov 2014	12
M1273	Test Receiver	Rohde & Schwarz	ESIB 26	100275	15 Feb 2015	12
G0543	Amplifier	Sonoma	310N	230801	19 Aug 2014	3
A490	Antenna	Chase	CBL6111A	1590	29 Apr 2015	12
A1834	Attenuator	Hewlett Packard	8491B	10444	15 Nov 2014	12
A1393	Attenuator	Huber & Suhner	6820.17.B	757456	02 May 2015	12
M1656	Thermohygrometer	JM Handelspunkt	30.5015.13	None stated	14 Mar 2015	12
K0002	3m RSE Chamber	Rainford EMC	N/A	N/A	14 Nov 2014	12
M1124	Test Receiver	Rohde & Schwarz	ESIB 26	100046K	01 Oct 2014	12
A1534	Pre Amplifier	Hewlett Packard	8449B	3008A00405	18 May 2015	12
A1396	Attenuator	Huber & Suhner	6810.17.B	757987	02 May 2015	12
A1974	High Pass Filter	AtlanTechRF	AFH - 01000	090000283	12 Apr 2015	12
A1975	High Pass Filter	AtlanTechRF	AFH - 03000	090424010	12 Apr 2015	12
A1818	Antenna	EMCO	3115	00075692	14 Nov 2014	12
A253	Antenna	Flann Microwave	12240-20	128	14 Nov 2014	12
A254	Antenna	Flann Microwave	14240-20	139	14 Nov 2014	12
A255	Antenna	Flann Microwave	16240-20	519	14 Nov 2014	12

5.2.4. Transmitter Radiated Emissions at Band Edges

Test Summary:

Test Engineers:	David Doyle & Nick Steele	**Test Dates:**	06 August 2014 & 14 September 2014
Test Sample IMEI:	352025060238798		

FCC Reference:	Parts 90.691 and 2.1053
Test Method Used:	As detailed in KDB 971168 Section 6.1 referencing FCC Part 2.1053

Environmental Conditions:

Temperature (℃):	23 to 25
Relative Humidity (%):	43 to 46

Note(s):

1. Measurements were performed with the EUT transmitting with QPSK and 16QAM modulation schemes, with resource blocks settings as detailed in section 4.3 of this report.
2. Measurements were performed in a fully anechoic chamber (Asset Number K0002) at a distance of 3 metres. The EUT was placed at a height of 1.5 metres above the test chamber floor in the centre of the chamber turntable. The measurement antenna was placed at a fixed height of 1.5 metres above the test chamber floor in line with the EUT.
3. 1.4 MHz Channel bandwidth: In the first 1.0 MHz immediately outside and adjacent to the operating band, the test receiver resolution bandwidth was set to 20 kHz (>1% of 1.45 MHz, the widest 26 dB emission bandwidth) and video bandwidth 100 kHz (as close to > three times the resolution bandwidth as the test receiver allowed).
4. 3 MHz Channel bandwidth: In the first 1.0 MHz immediately outside and adjacent to the operating band, the test receiver resolution bandwidth was set to 30 kHz (1% of 3 MHz, the widest 26 dB emission bandwidth) and video bandwidth 100 kHz (as close to > three times the resolution bandwidth as the test receiver allowed).
5. 5 MHz Channel bandwidth: In the first 1.0 MHz immediately outside and adjacent to the operating band, the test receiver resolution bandwidth was set to 50 kHz (1% of 5 MHz, the widest 26 dB emission bandwidth) and video bandwidth 200 kHz (as close to > three times the resolution bandwidth as the test receiver allowed).
6. 10 MHz Channel bandwidth: In the first 1.0 MHz immediately outside and adjacent to the operating band, the test receiver resolution bandwidth was set to 100 kHz (>1% of 9.9 MHz, the widest 26 dB emission bandwidth) and video bandwidth 300 kHz (three times the resolution bandwidth).

Transmitter Radiated Emissions at Band Edges (continued)

Results: 1.4 MHz Channel Bandwidth / QPSK

Frequency (MHz)	Resource Blocks	Resource Block Offset	Emission Level (dBm)	Limit (dBm)	Margin (dB)	Result
813.978	6	0	-29.5	-20.0	9.5	Complied
814	6	0	-31.2	-20.0	11.2	Complied
824	6	0	-35.6	-20.0	15.6	Complied
824.005	6	0	-34.9	-20.0	14.9	Complied

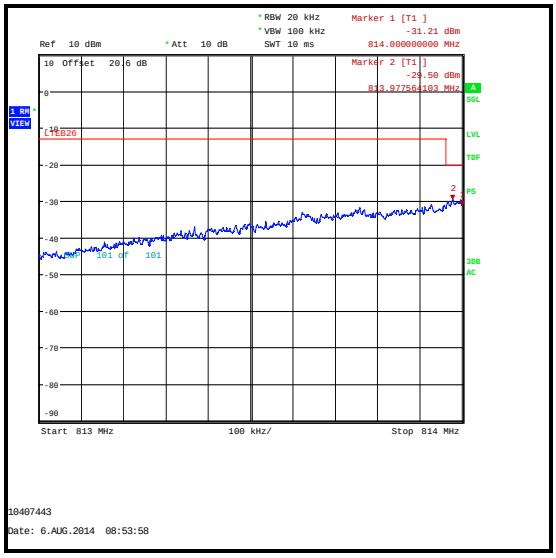

QPSK / Lower Band Edge

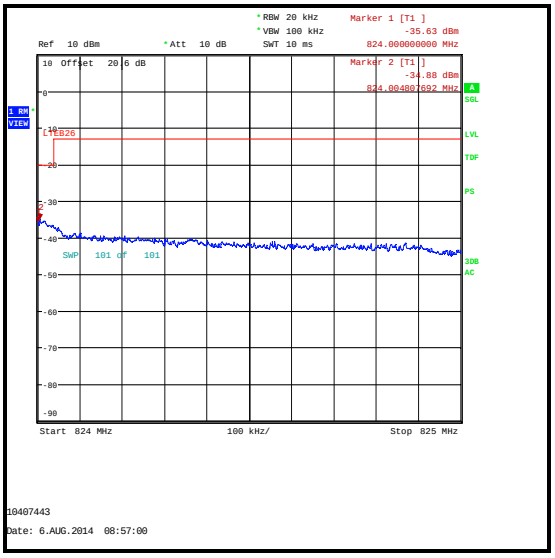

QPSK / Upper Band Edge

Transmitter Radiated Emissions at Band Edges (continued)

Results: 1.4 MHz Channel Bandwidth / QPSK

Frequency (MHz)	Resource Blocks	Resource Block Offset	Emission Level (dBm)	Limit (dBm)	Margin (dB)	Result
814	1	0	-26.0	-20.0	6.0	Complied
824	1	5	-26.9	-20.0	6.9	Complied

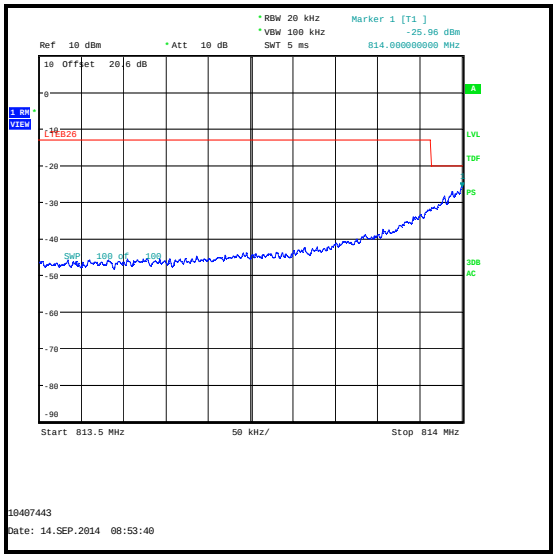

QPSK / Lower Band Edge

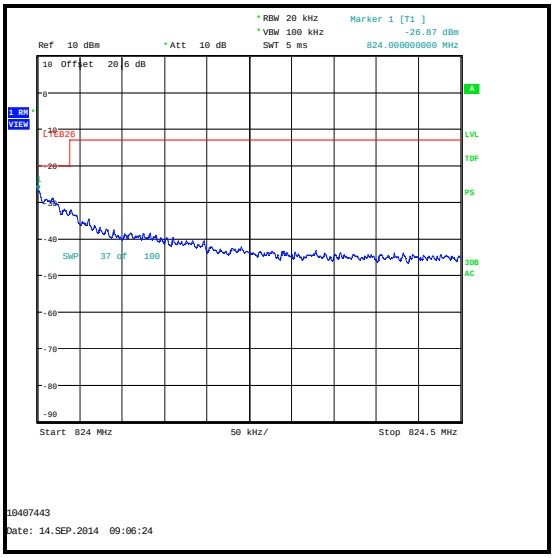

QPSK / Upper Band Edge

Transmitter Radiated Emissions at Band Edges (continued)

Results: 1.4 MHz Channel Bandwidth / 16QAM

Frequency (MHz)	Resource Blocks	Resource Block Offset	Emission Level (dBm)	Limit (dBm)	Margin (dB)	Result
813.995	6	0	-30.3	-20.0	10.3	Complied
814	6	0	-31.7	-20.0	11.7	Complied
824	6	0	-35.2	-20.0	15.2	Complied
824.005	6	0	-34.6	-20.0	14.6	Complied

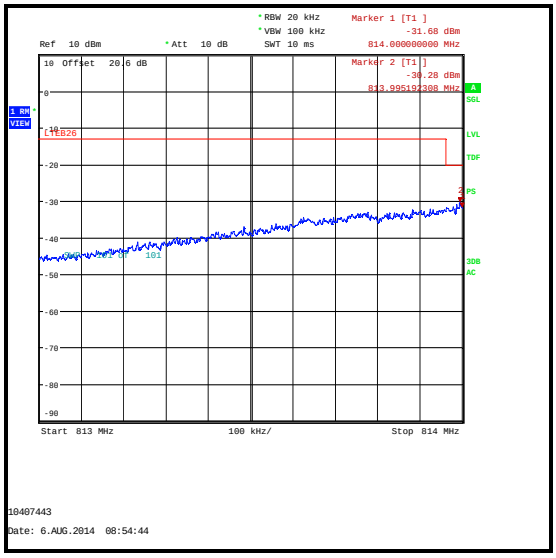

16QAM / Lower Band Edge

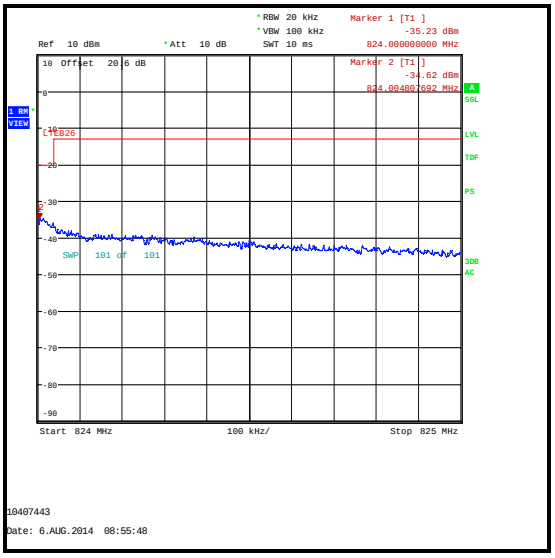

16QAM / Upper Band Edge

Transmitter Radiated Emissions at Band Edges (continued)

Results: 1.4 MHz Channel Bandwidth / 16QAM

Frequency (MHz)	Resource Blocks	Resource Block Offset	Emission Level (dBm)	Limit (dBm)	Margin (dB)	Result
814	1	0	-26.6	-20.0	6.6	Complied
824	1	5	-28.2	-20.0	8.2	Complied

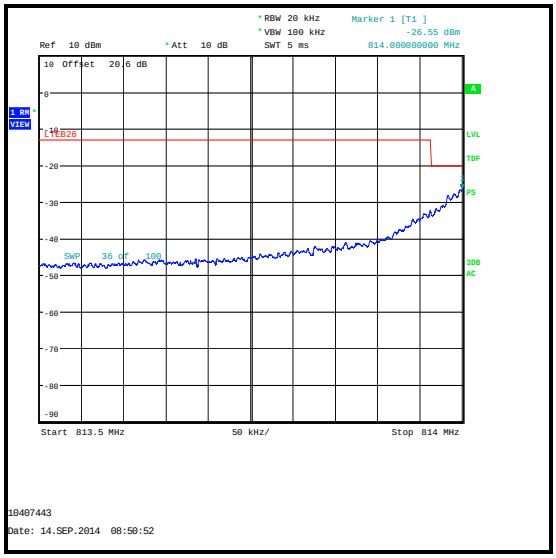

16QAM / Lower Band Edge

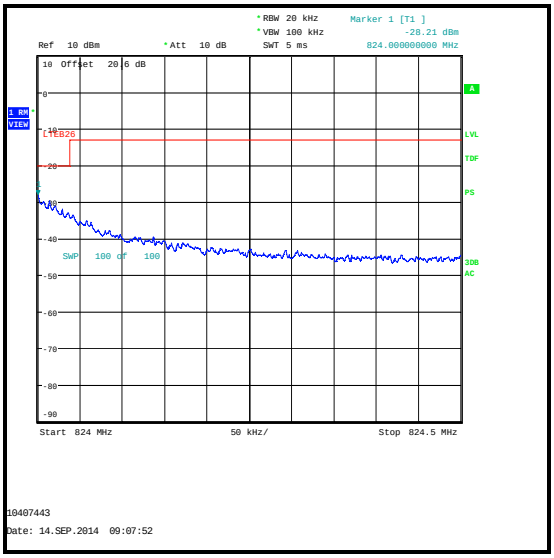

16QAM / Upper Band Edge

Transmitter Radiated Emissions at Band Edges (continued)

Results: 3 MHz Channel Bandwidth / QPSK

Frequency (MHz)	Resource Blocks	Resource Block Offset	Emission Level (dBm)	Limit (dBm)	Margin (dB)	Result
813.955	15	0	-30.3	-13.0	17.3	Complied
814	15	0	-30.5	-20.0	10.5	Complied
824	15	0	-33.6	-20.0	13.6	Complied
824.003	15	0	-32.5	-20.0	12.5	Complied

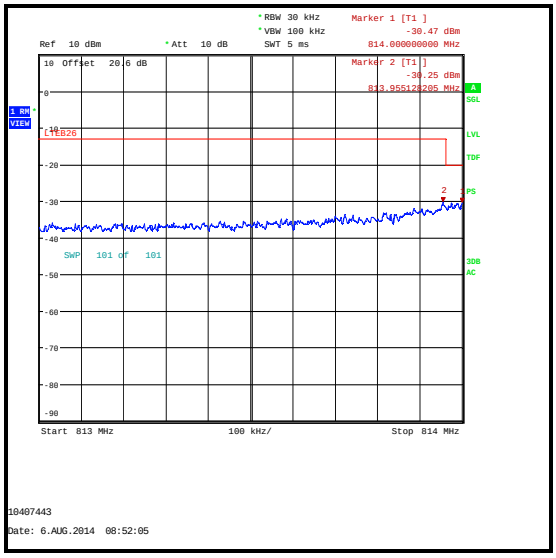

QPSK / Lower Band Edge

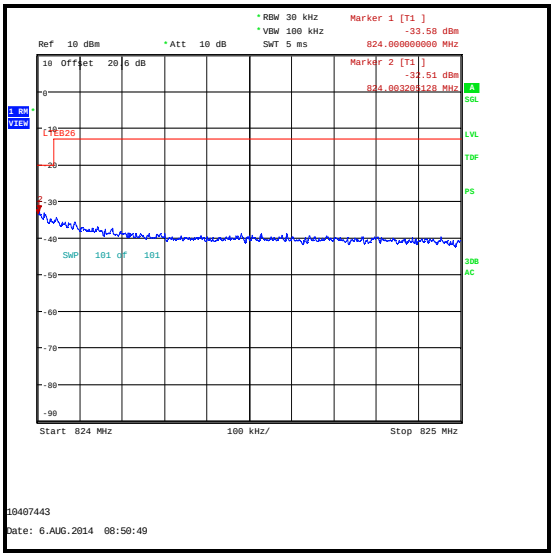

QPSK / Upper Band Edge

Transmitter Radiated Emissions at Band Edges (continued)

Results: 3 MHz Channel Bandwidth / QPSK

Frequency (MHz)	Resource Blocks	Resource Block Offset	Emission Level (dBm)	Limit (dBm)	Margin (dB)	Result
814	1	0	-24.6	-20.0	4.6	Complied
824	1	14	-25.5	-20.0	5.5	Complied

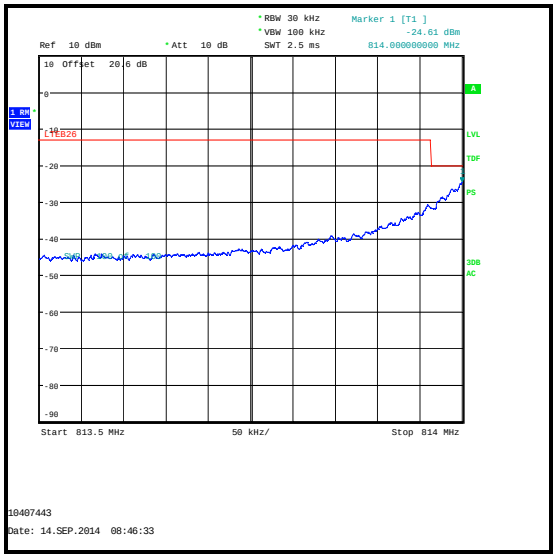

QPSK / Lower Band Edge

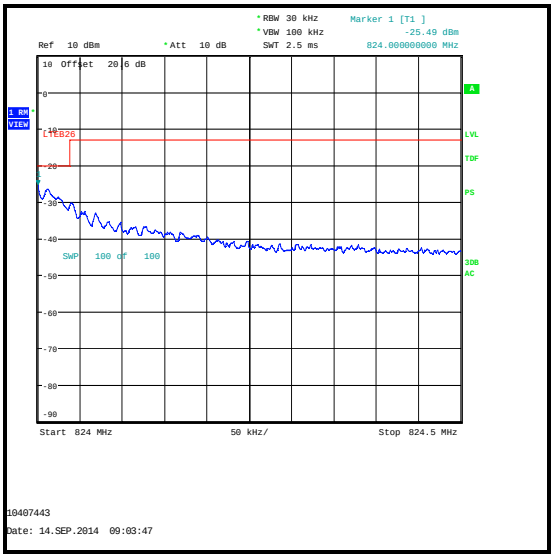

QPSK / Upper Band Edge

Transmitter Radiated Emissions at Band Edges (continued)

Results: 3 MHz Channel Bandwidth / 16QAM

Frequency (MHz)	Resource Blocks	Resource Block Offset	Emission Level (dBm)	Limit (dBm)	Margin (dB)	Result
813.990	15	0	-30.8	-20.0	10.8	Complied
814	15	0	-31.4	-20.0	11.4	Complied
824	15	0	-35.6	-20.0	15.6	Complied
824.010	15	0	-31.9	-20.0	11.9	Complied

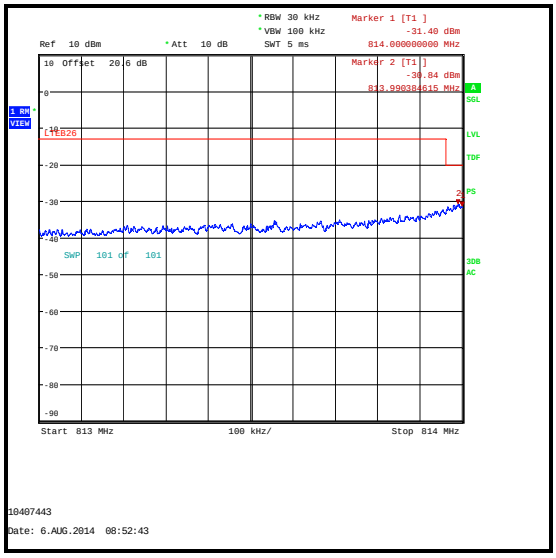

16QAM / Lower Band Edge

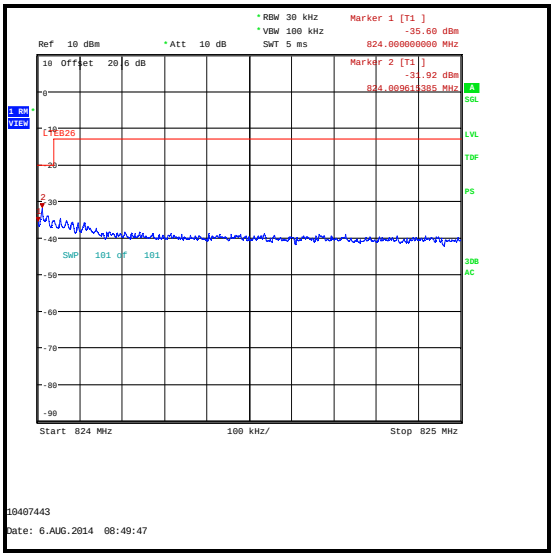

16QAM / Upper Band Edge

Transmitter Radiated Emissions at Band Edges (continued)

Results: 3 MHz Channel Bandwidth / 16QAM

Frequency (MHz)	Resource Blocks	Resource Block Offset	Emission Level (dBm)	Limit (dBm)	Margin (dB)	Result
814	1	0	-25.4	-20.0	5.4	Complied
824	1	14	-27.6	-20.0	7.6	Complied

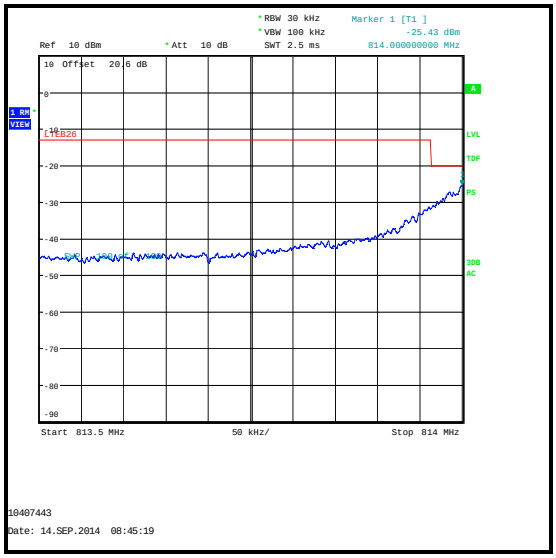

16QAM / Lower Band Edge

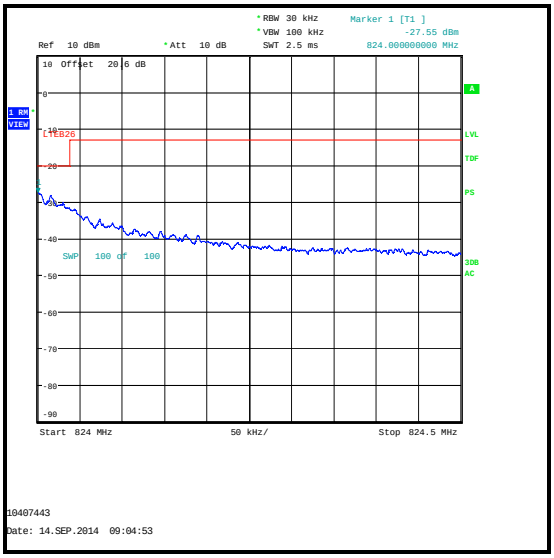

16QAM / Upper Band Edge

Transmitter Radiated Emissions at Band Edges (continued)

Results: 5 MHz Channel Bandwidth / QPSK

Frequency (MHz)	Resource Blocks	Resource Block Offset	Emission Level (dBm)	Limit (dBm)	Margin (dB)	Result
813.971	25	0	-31.5	-20.0	11.5	Complied
814	25	0	-32.5	-20.0	12.5	Complied
824	25	0	-33.8	-20.0	13.8	Complied

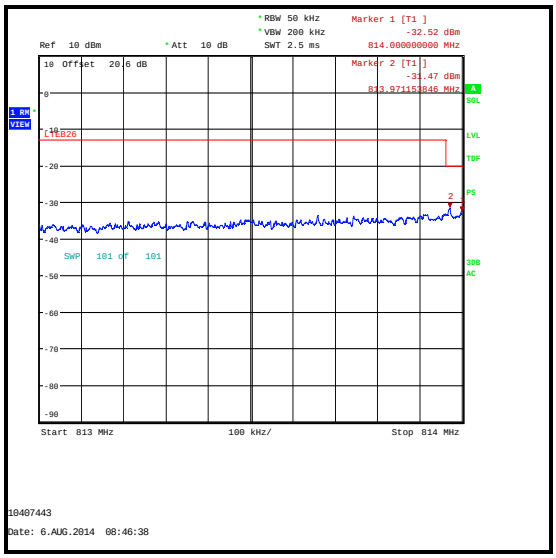

QPSK / Lower Band Edge

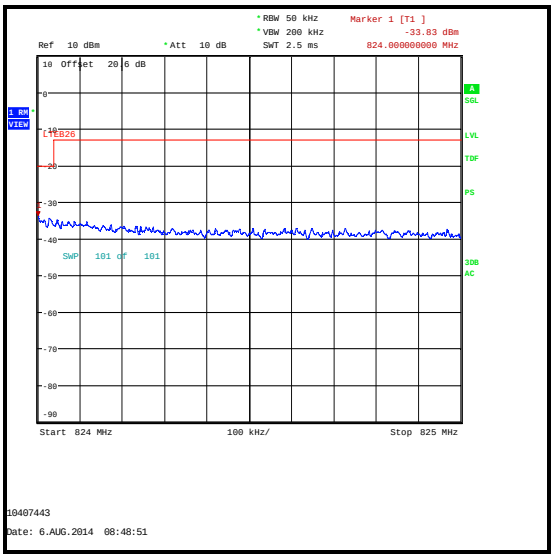

QPSK / Upper Band Edge

Transmitter Radiated Emissions at Band Edges (continued)

Results: 5 MHz Channel Bandwidth / QPSK

Frequency (MHz)	Resource Blocks	Resource Block Offset	Emission Level (dBm)	Limit (dBm)	Margin (dB)	Result
814	1	0	-32.2	-20.0	12.2	Complied
824	1	24	-30.8	-20.0	10.8	Complied

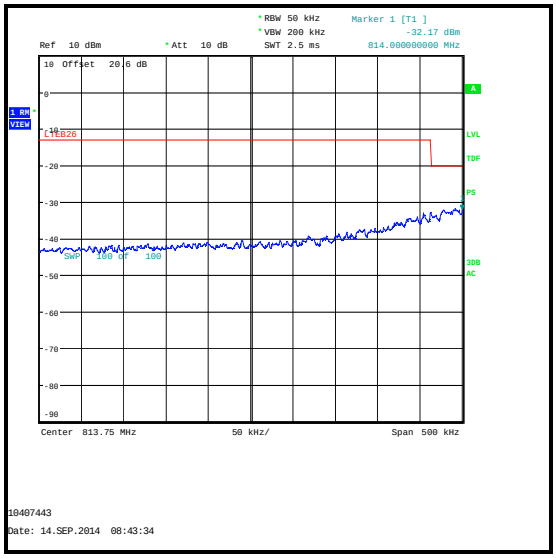

QPSK / Lower Band Edge

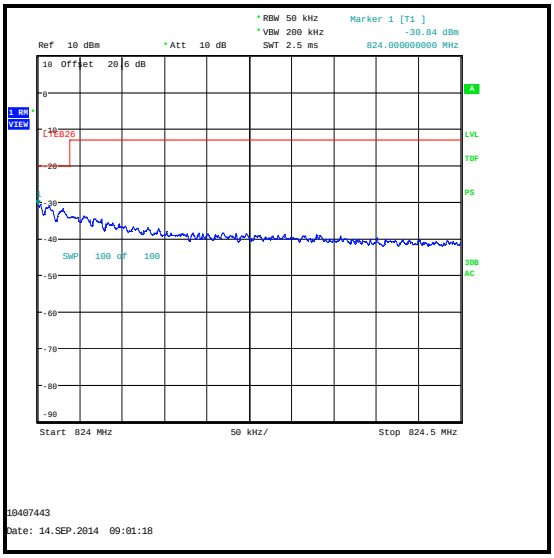

QPSK / Upper Band Edge

Transmitter Radiated Emissions at Band Edges (continued)

Results: 5 MHz Channel Bandwidth / 16QAM

Frequency (MHz)	Resource Blocks	Resource Block Offset	Emission Level (dBm)	Limit (dBm)	Margin (dB)	Result
813.968	25	0	-32.7	-20.0	12.7	Complied
814	25	0	-34.2	-20.0	14.2	Complied
824	25	0	-34.6	-20.0	14.6	Complied

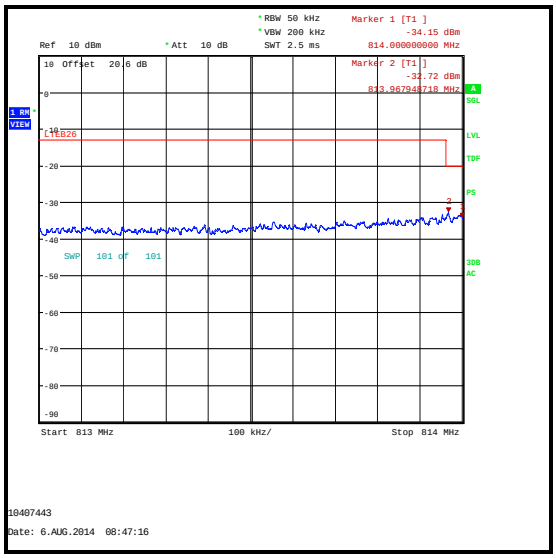

16QAM / Lower Band Edge

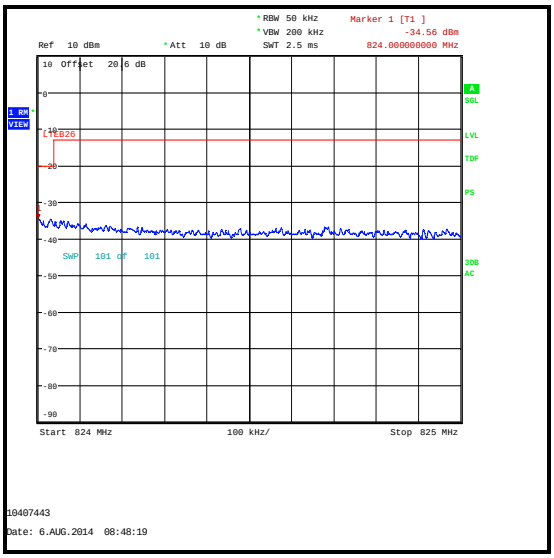

16QAM / Upper Band Edge

Transmitter Radiated Emissions at Band Edges (continued)

Results: 5 MHz Channel Bandwidth / 16QAM

Frequency (MHz)	Resource Blocks	Resource Block Offset	Emission Level (dBm)	Limit (dBm)	Margin (dB)	Result
814	1	0	-32.2	-20.0	12.2	Complied
824	1	24	-31.7	-20.0	11.7	Complied

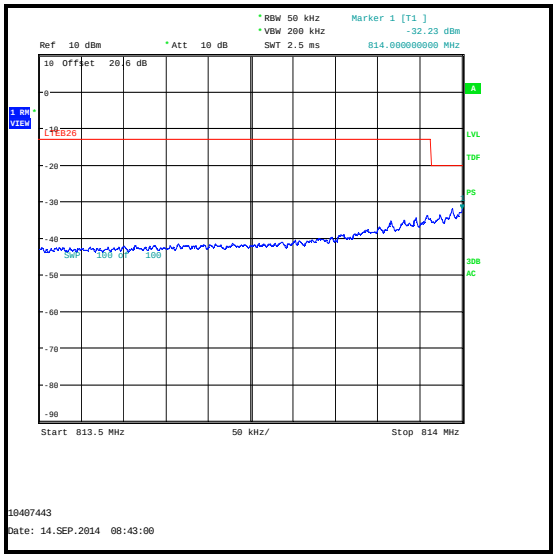

16QAM / Lower Band Edge

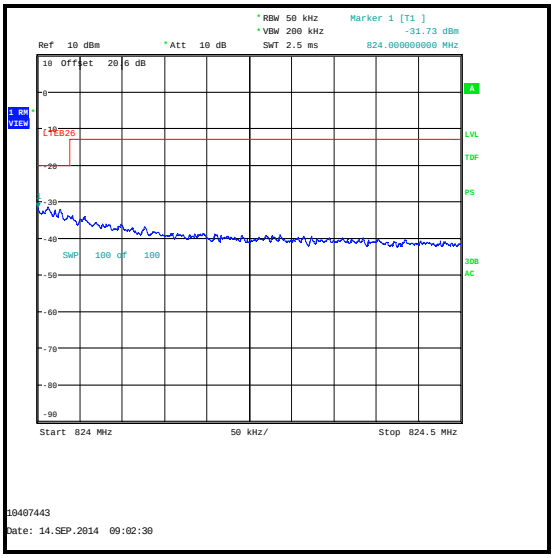

16QAM / Upper Band Edge

Transmitter Radiated Emissions at Band Edges (continued)

Results: 10 MHz Channel Bandwidth / QPSK

Frequency (MHz)	Resource Blocks	Resource Block Offset	Emission Level (dBm)	Limit (dBm)	Margin (dB)	Result
814	50	0	-31.9	-20.0	11.9	Complied
824	50	0	-34.8	-20.0	14.8	Complied
824.016	50	0	-34.3	-20.0	14.3	Complied

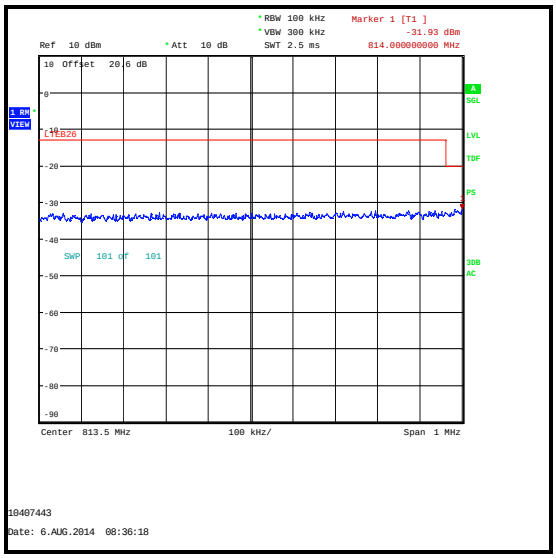

QPSK / Lower Band Edge

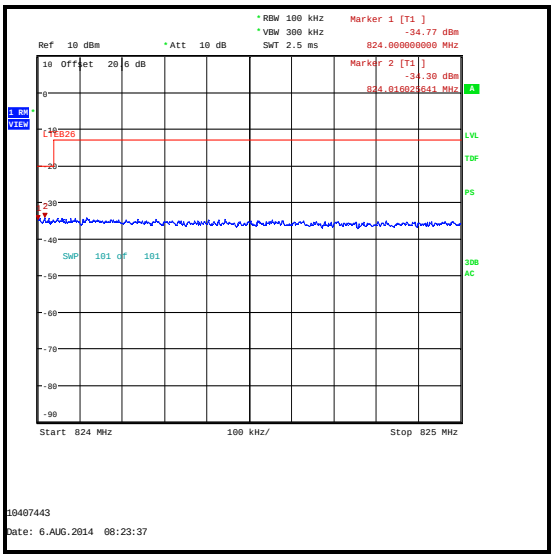

QPSK / Upper Band Edge

Transmitter Radiated Emissions at Band Edges (continued)

Results: 10 MHz Channel Bandwidth / QPSK

Frequency (MHz)	Resource Blocks	Resource Block Offset	Emission Level (dBm)	Limit (dBm)	Margin (dB)	Result
814	1	0	-35.1	-20.0	15.1	Complied
824	1	49	-35.0	-20.0	15.0	Complied

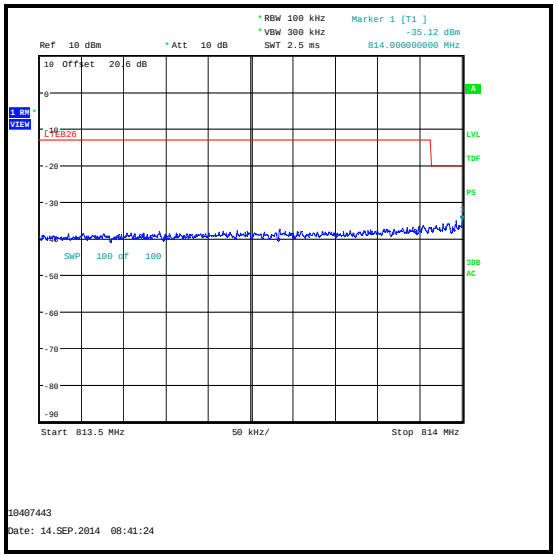

QPSK / Lower Band Edge

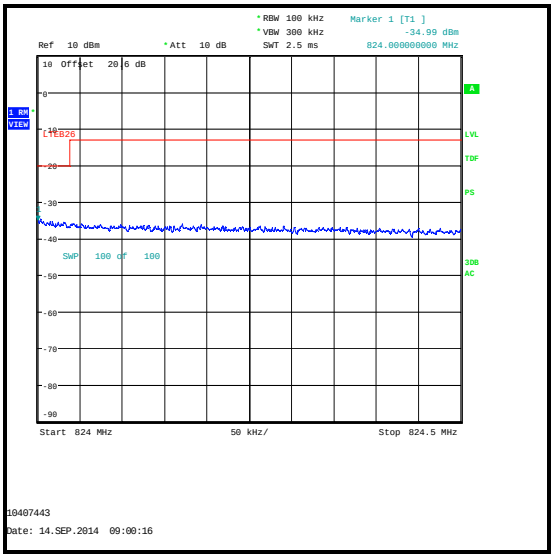

QPSK / Upper Band Edge

Transmitter Radiated Emissions at Band Edges (continued)

Results: 10 MHz Channel Bandwidth / 16QAM

Frequency (MHz)	Resource Blocks	Resource Block Offset	Emission Level (dBm)	Limit (dBm)	Margin (dB)	Result
813.990	50	0	-33.0	-20.0	13.0	Complied
814	50	0	-33.7	-20.0	13.7	Complied
824	50	0	-35.6	-20.0	15.6	Complied
824.021	50	0	-34.5	-20.0	14.5	Complied

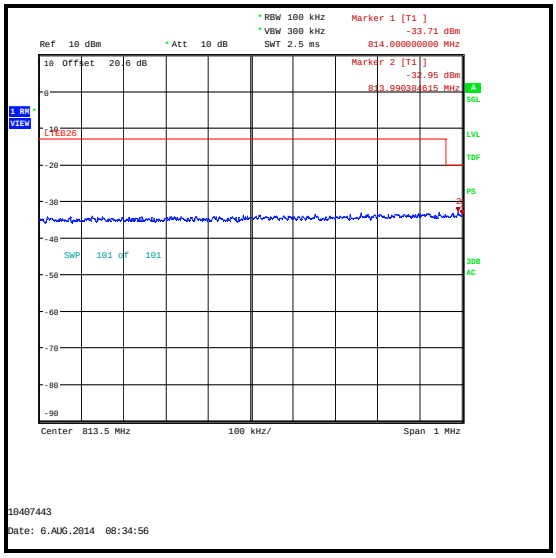

16QAM / Lower Band Edge

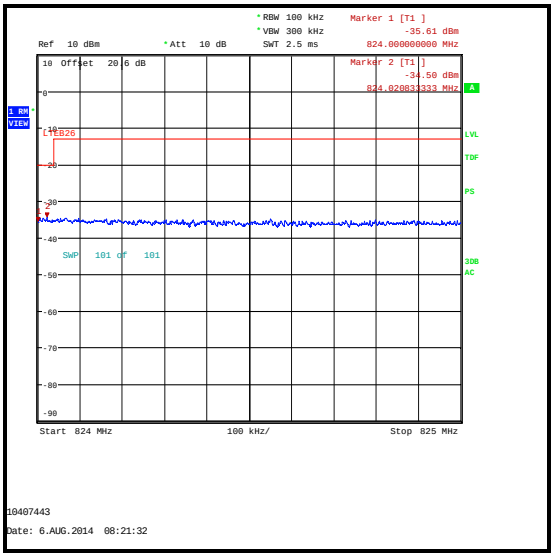

16QAM / Upper Band Edge

Transmitter Radiated Emissions at Band Edges (continued)

Results: 10 MHz Channel Bandwidth / 16QAM

Frequency (MHz)	Resource Blocks	Resource Block Offset	Emission Level (dBm)	Limit (dBm)	Margin (dB)	Result
814	1	0	-36.0	-20.0	16.0	Complied
824	1	49	-35.9	-20.0	15.9	Complied

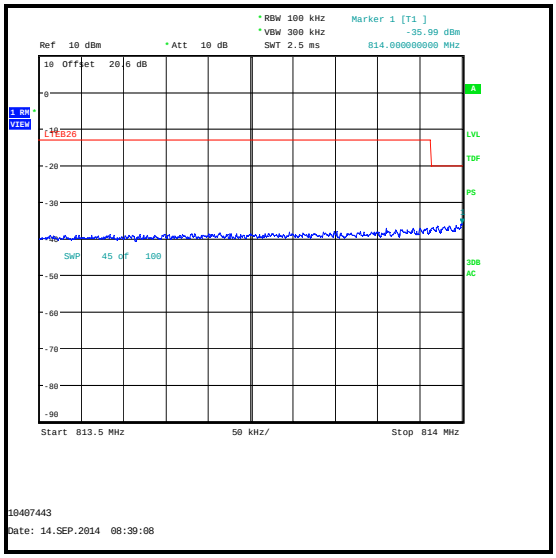

16QAM / Lower Band Edge

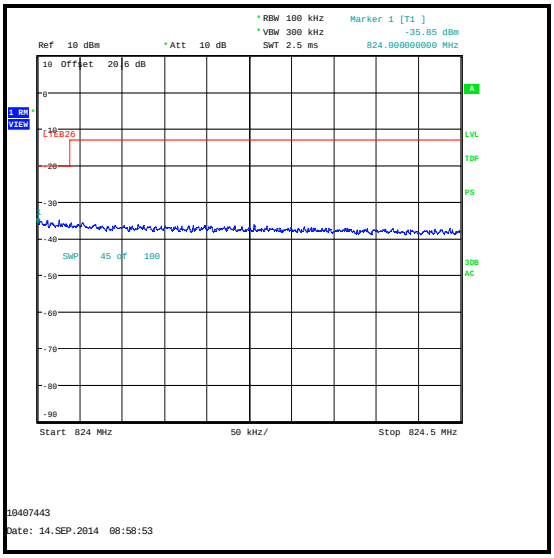

16QAM / Upper Band Edge

Test Equipment Used:

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M1656	Thermohygrometer	JM Handelspunkt	30.5015.13	None stated	14 Mar 2015	12
K0002	3m RSE Chamber	Rainford EMC	N/A	N/A	14 Nov 2014	12
M1874	Test Receiver	Rohde & Schwarz	ESU26	100553	13 May 2015	12
A1393	Attenuator	Huber & Suhner	6820.17.B	757456	02 May 2015	12
A288	Antenna	Chase	CBL6111A	1589	20 Aug 2014	12

5.2.5. Transmitter Frequency Stability (Temperature Variation)

Test Summary:

Test Engineer:	Keith Tucker	**Test Dates:**	09 July 2014 & 10 July 2014
Test Sample IMEI:	352025060274538		

FCC Reference:	Parts 90.213 and 2.1055
Test Method Used:	As detailed in KDB 971168 Section 9.0 referencing ANSI TIA-603-C-2004 Section 2.2.2 and FCC Part 2.1055

Environmental Conditions:

Ambient Temperature (℃):	22 to 23
Ambient Relative Humidity (%):	38 to 49

Note(s):

1. Flying leads were connected internally to the EUT in place of the battery. These leads were extended and connected to a bench power supply.
2. Frequency error was measured using a calibrated Rohde & Schwarz CMW 500 Universal Radio Communications Tester in accordance with current Rohde & Schwarz application notes. The EUT was connected by suitable RF cables to the CMW 500. A bi-directional communications link was established between the EUT and CMW 500. The frequency meter value was recorded.
3. Temperature was monitored throughout the test with a calibrated digital thermometer.

Results: Middle Channel (819.0 MHz)

Temperature (°C)	Measured Frequency (MHz)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)	Margin (ppm)	Result
-30	818.999992	8	0.0098	2.5	2.4902	Complied
-20	818.999993	7	0.0085	2.5	2.4915	Complied
-10	818.999993	7	0.0085	2.5	2.4915	Complied
0	818.999993	7	0.0085	2.5	2.4915	Complied
10	818.999992	8	0.0098	2.5	2.4902	Complied
20	818.999991	9	0.0110	2.5	2.4890	Complied
30	818.999991	9	0.0110	2.5	2.4890	Complied
40	818.999991	9	0.0110	2.5	2.4890	Complied
50	818.999992	8	0.0098	2.5	2.4902	Complied

Transmitter Frequency Stability (Temperature Variation) (continued)

Test Equipment Used:

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M1658	Thermohygrometer	JM Handelspunkt	30.5015.13	None stated	14 Mar 2015	12
M1870	Wideband Radio Comms Tester	Rohde & Schwarz	CMW500	145919	05 May 2015	12
G088	Dual DC power supply	TTi	CPX200	100700	Calibrated before use	-
M1251	Multimeter	Fluke	175	89170179	19 May 2015	12
M1643	Thermometer	Fluke	52II	18890136	07 Apr 2015	12
E013	Environmental Chamber	Sanyo	MTH-4200PR	none	Calibrated before use	-

5.2.6. Transmitter Frequency Stability (Voltage Variation)

Test Summary:

Test Engineer:	Keith Tucker	**Test Dates:**	09 July 2014 & 10 July 2014
Test Sample IMEI:	352025060274538		

FCC Reference:	Parts 90.213 and 2.1055
Test Method Used:	As detailed in KDB 971168 Section 9.0 referencing ANSI TIA-603-C-2004 Section 2.2.2 and FCC Part 2.1055

Environmental Conditions:

Temperature (℃):	22 to 23
Relative Humidity (%):	38 to 49

Note(s):

1. Flying leads were connected internally to the EUT in place of the battery. These leads were extended and connected to a bench power supply.
2. Frequency error was measured using a calibrated Rohde & Schwarz CMW 500 Universal Radio Communications Tester in accordance with current Rohde & Schwarz application notes. The EUT was connected by suitable RF cables to the CMW 500. A bi-directional communications link was established between the EUT and CMW 500. The frequency meter value was recorded.
3. Voltage was monitored throughout the test with a calibrated digital voltmeter.

Results: Middle Channel (819.0 MHz)

Supply Voltage (V)	Measured Frequency (MHz)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)	Margin (ppm)	Result
3.4	818.999991	9	0.0110	2.5	2.4890	Complied
4.2	818.999992	8	0.0098	2.5	2.4902	Complied

Test Equipment Used:

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M1658	Thermohygrometer	JM Handelspunkt	30.5015.13	None stated	14 Mar 2015	12
M1870	Wideband Radio Comms Tester	Rohde & Schwarz	CMW500	145919	05 May 2015	12
G088	Dual DC power supply	TTi	CPX200	100700	Calibrated before use	-
M1251	Multimeter	Fluke	175	89170179	19 May 2015	12

6. Measurement Uncertainty

No measurement or test can ever be perfect and the imperfections give rise to error of measurement in the results. Consequently the result of a measurement is only an approximation to the value of the measurand (the specific quantity subject to measurement) and is only complete when accompanied by a statement of the uncertainty of the approximation.

The expression of uncertainty of a measurement result allows realistic comparison of results with reference values and limits given in specifications and standards.

The uncertainty of the result may need to be taken into account when interpreting the measurement results.

The reported expanded uncertainties below are based on a standard uncertainty multiplied by an appropriate coverage factor such that a confidence level of approximately 95% is maintained. For the purposes of this document “approximately” is interpreted as meaning “effectively” or “for most practical purposes”.

Measurement Type	Range	Confidence Level (%)	Calculated Uncertainty
Conducted Carrier Output Power	814 MHz to 824 MHz	95%	±0.76 dB
Occupied Bandwidth	814 MHz to 824 MHz	95%	±3.92 %
Radiated Emissions	30 MHz to 1 GHz	95%	±5.65 dB
Radiated Emissions	1 GHz to 9 GHz	95%	±2.94 dB
Frequency Stability	814 MHz to 824 MHz	95%	±23 Hz

The methods used to calculate the above uncertainties are in line with those recommended within the various measurement specifications. Where measurement specifications do not include guidelines for the evaluation of measurement uncertainty the published guidance of the appropriate accreditation body is followed.

7. Report Revision History

Version Number	Revision Details		
	Page No(s)	**Clause**	**Details**
1.0	-	-	Initial Version
2.0	-	-	Admin updates Additional Radiated Band Edge measurements

--- END OF REPORT ---