FCC 47 CFR PART 15 SUBPART C
INDUSTRY CANADA RSS-247 ISSUE 1

CERTIFICATION TEST REPORT

FOR

TABLET DEVICE

MODEL NUMBER: A1674, A1675

FCC ID: BCGA1674
IC: 579C-A1674

REPORT NUMBER: 15U22428-E1V2

ISSUE DATE: FEBRUARY 09, 2016

Prepared for
APPLE, INC.
1 INFINITE LOOP
CUPERTINO, CA 95014, U.S.A.

Prepared by
UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888

NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
V1	02/03/2016	Initial Review	C. Pang
V2	02/09/2016	Addressed TCB's Questions	E. Yu

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701I
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS 6

2. TEST METHODOLOGY 7

3. FACILITIES AND ACCREDITATION 7

4. CALIBRATION AND UNCERTAINTY 8

4.1. MEASURING INSTRUMENT CALIBRATION 8

4.2. SAMPLE CALCULATION 8

4.3. MEASUREMENT UNCERTAINTY 8

5. EQUIPMENT UNDER TEST 9

5.1. DESCRIPTION OF EUT 9

5.2. DESCRIPTION OF MODELS DIFFERENCES 9

5.3. MAXIMUM OUTPUT POWER 9

5.4. DESCRIPTION OF AVAILABLE ANTENNAS 9

5.5. SOFTWARE AND FIRMWARE 9

5.6. WORST-CASE CONFIGURATION AND MODE 10

5.7. DESCRIPTION OF TEST SETUP 11

6. TEST AND MEASUREMENT EQUIPMENT 18

7. ANTENNA PORT TEST RESULTS 19

7.1. ON TIME AND DUTY CYCLE 19

7.2. ANTENNA B HIGH POWER BASIC DATA RATE GFSK MODULATION 24

7.2.1. 20 dB AND 99% BANDWIDTH 24
7.2.2. HOPPING FREQUENCY SEPARATION 26
7.2.3. NUMBER OF HOPPING CHANNELS 27
7.2.4. AVERAGE TIME OF OCCUPANCY 30
7.2.5. OUTPUT POWER 34
7.2.6. AVERAGE POWER 35
7.2.7. CONDUCTED SPURIOUS EMISSIONS 36

7.3. ANTENNA B HIGH POWER ENHANCED DATA RATE QPSK MODULATION 41

7.3.1. OUTPUT POWER 41
7.3.2. AVERAGE POWER 42

7.4. ANTENNA B HIGH POWER ENHANCED DATA RATE 8PSK MODULATION 43

7.4.1. 20 dB AND 99% BANDWIDTH 43
7.4.2. HOPPING FREQUENCY SEPARATION 45
7.4.3. NUMBER OF HOPPING CHANNELS 46
7.4.4. AVERAGE TIME OF OCCUPANCY 49
7.4.5. OUTPUT POWER 53
7.4.6. AVERAGE POWER 54
7.4.7. CONDUCTED SPURIOUS EMISSIONS 55

7.5. ANTENNA B LOW POWER BASIC DATA RATE GFSK MODULATION 60

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

7.5.1. 20 dB AND 99% BANDWIDTH 60
7.5.2. HOPPING FREQUENCY SEPARATION 62
7.5.3. NUMBER OF HOPPING CHANNELS 63
7.5.4. AVERAGE TIME OF OCCUPANCY 66
7.5.5. OUTPUT POWER 70
7.5.6. AVERAGE POWER 71
7.5.7. CONDUCTED SPURIOUS EMISSIONS 72

7.6. ANTENNA B LOW POWER ENHANCED DATA RATE QPSK MODULATION 77
7.6.1. OUTPUT POWER 77
7.6.2. AVERAGE POWER 78

7.7. ANTENNA B LOW POWER ENHANCED DATA RATE 8PSK MODULATION 79
7.7.1. 20 dB AND 99% BANDWIDTH 79
7.7.2. HOPPING FREQUENCY SEPARATION 81
7.7.3. NUMBER OF HOPPING CHANNELS 82
7.7.4. AVERAGE TIME OF OCCUPANCY 85
7.7.5. OUTPUT POWER 89
7.7.6. AVERAGE POWER 90
7.7.7. CONDUCTED SPURIOUS EMISSIONS 91

7.8. ANTENNA D HIGH POWER BASIC DATA RATE GFSK MODULATION 96
7.8.1. 20 dB AND 99% BANDWIDTH 96
7.8.2. HOPPING FREQUENCY SEPARATION 98
7.8.3. NUMBER OF HOPPING CHANNELS 99
7.8.4. AVERAGE TIME OF OCCUPANCY 102
7.8.5. OUTPUT POWER 106
7.8.6. AVERAGE POWER 107
7.8.7. CONDUCTED SPURIOUS EMISSIONS 108

7.9. ANTENNA D HIGH POWER ENHANCED DATA RATE QPSK MODULATION 113
7.9.1. OUTPUT POWER 113
7.9.2. AVERAGE POWER 114

7.10. ANTENNA D HIGH POWER ENHANCED DATA RATE 8PSK MODULATION 115
7.10.1. 20 dB AND 99% BANDWIDTH 115
7.10.2. HOPPING FREQUENCY SEPARATION 117
7.10.3. NUMBER OF HOPPING CHANNELS 118
7.10.4. AVERAGE TIME OF OCCUPANCY 121
7.10.5. OUTPUT POWER 125
7.10.6. AVERAGE POWER 126
7.10.7. CONDUCTED SPURIOUS EMISSIONS 127

7.11. ANTENNA D LOW POWER BASIC DATA RATE GFSK MODULATION 132
7.11.1. 20 dB AND 99% BANDWIDTH 132
7.11.2. HOPPING FREQUENCY SEPARATION 134
7.11.3. NUMBER OF HOPPING CHANNELS 135
7.11.4. AVERAGE TIME OF OCCUPANCY 138
7.11.5. OUTPUT POWER 142
7.11.6. AVERAGE POWER 143
7.11.7. CONDUCTED SPURIOUS EMISSIONS 144

7.12. ANTENNA D LOW POWER ENHANCED DATA RATE QPSK MODULATION 149
7.12.1. OUTPUT POWER 149
7.12.2. AVERAGE POWER 150

7.13. ANTENNA D LOW POWER ENHANCED DATA RATE 8PSK MODULATION 151

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

7.13.1. 20 dB AND 99% BANDWIDTH 151
7.13.2. HOPPING FREQUENCY SEPARATION 153
7.13.3. NUMBER OF HOPPING CHANNELS 154
7.13.4. AVERAGE TIME OF OCCUPANCY 157
7.13.5. OUTPUT POWER 161
7.13.6. AVERAGE POWER 162
7.13.7. CONDUCTED SPURIOUS EMISSIONS 163

8. RADIATED TEST RESULTS 168

8.1. LIMITS AND PROCEDURE 168

8.2. TRANSMITTER ABOVE 1 GHz 169
8.2.1. ANTENNA B HIGH POWER MODE BASIC DATA RATE GFSK MODULATION . 169
8.2.2. ANTENNA B HIGH POWER MODE ENHANCED DATA RATE 8PSK MODULATION 179
8.2.3. ANTENNA B LOW POWER MODE BASIC DATA RATE GFSK MODULATION .. 189
8.2.4. ANTENNA B LOW POWER MODE ENHANCED DATA RATE 8PSK MODULATION 199
8.2.5. ANTENNA D HIGH POWER MODE BASIC DATA RATE GFSK MODULATION . 209
8.2.6. ANTENNA D HIGH POWER MODE ENHANCED DATA RATE 8PSK MODULATION 219
8.2.7. ANTENNA D LOW POWER MODE BASIC DATA RATE GFSK MODULATION .. 229
8.2.8. ANTENNA D LOW POWER MODE ENHANCED DATA RATE 8PSK MODULATION 239

8.3. WORST-CASE BELOW 1 GHz 249

8.4. WORST-CASE ABOVE 18 GHz 251

9. AC POWER LINE CONDUCTED EMISSIONS 253

9.1. EUT POWERED BY AC/DC ADAPTER VIA USB CABLE 254

9.2. EUT POWERED BY HOST PC VIA USB CABLE 256

10. SETUP PHOTOS 258

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: APPLE, INC.
1 INFINITE LOOP
CUPERTINO, CA 95014, U.S.A.

EUT DESCRIPTION: TABLET DEVICE

MODEL: A1674, A1675

SERIAL NUMBER: DLXQ00ZH0JF (Conducted); DLXQL01HH0JF (Radiated)

DATE TESTED: DECEMBER 14, 2015 – JANUARY 14, 2015

APPLICABLE STANDARDS	
STANDARD	**TEST RESULTS**
CFR 47 Part 15 Subpart C	Pass
INDUSTRY CANADA RSS-247 Issue 1	Pass
INDUSTRY CANADA RSS-GEN Issue 4	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:

CHIN PANG
SENIOR ENGINEER
UL VERIFICATION SERVICES INC.

Tested By:

ERIC YU
EMC ENGINEER
UL VERIFICATION SERVICES INC.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, ANSI C63.10-2013, RSS-GEN Issue 4, and RSS-247 Issue 1.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
☐ Chamber A	☐ Chamber D
☐ Chamber B	☐ Chamber E
☐ Chamber C	☐ Chamber F
	☐ Chamber G
	☒ Chamber H

The above test sites and facilities are covered under FCC Test Firm Registration # 208313. Chambers A through H are covered under Industry Canada company address code 2324B with site numbers 2324B -1 through 2324B-8, respectively.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at http://ts.nist.gov/standards/scopes/2000650.htm.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

Field Strength (dBuV/m) = Measured Voltage (dBuV) + Antenna Factor (dB/m) + Cable Loss (dB) – Preamp Gain (dB)

36.5 dBuV + 18.7 dB/m + 0.6 dB – 26.9 dB = 28.9 dBuV/m

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	±3.52 dB
Radiated Disturbance, 30 to 1000 MHz	±4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a tablet with multimedia functions (music, application support, and video), Cellular GSM/GPRS/EGPRS/CDMA2000 1xRTT/1xAdvanced/EVDO Rev.A/WCDMA/HSPA+/DC-HSDPA/LTE FDD & Carrier Aggregation/TDD/TD-SCDMA radio, IEEE 802.11a/b/g/n/ac radio, and Bluetooth radio. The rechargeable battery is not user accessible.

5.2. DESCRIPTION OF MODELS DIFFERENCES

Model tested: A1674.The Models A1674 & A1675 have one FCC ID: BCGA1674 and IC ID: 579C-A1674
Both Model A1674 and A1675 have identical PCB layout, design and functionality, except that A1674 supports second electronic-UICC based SIM or ”soft SIM” (called eSIM) beside the regular UICC based SIM and A1675 will come with eSIM removed.

RF and electromagnetic characteristic are independent of the eSIM element. Both models have exactly same technology and band support.

5.3. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2402 - 2480	Basic GFSK Antenna B High Power Mode	17.18	52.24
	Enhanced 8PSK Antenna B High Power Mode	14.52	28.31
	Basic GFSK Antenna B Low Power Mode	9.60	9.12
	Enhanced 8PSK Antenna B Low Power Mode	8.08	6.43
	Basic GFSK Antenna D High Power Mode	12.16	16.44
	Enhanced 8PSK Antenna D High Power Mode	13.19	20.84
	Basic GFSK Antenna D Low Power Mode	5.16	3.28
	Enhanced 8PSK Antenna D Low Power Mode	6.88	4.88

5.4. DESCRIPTION OF AVAILABLE ANTENNAS

Frequency Band (GHz)	Antenna Gain (dBi)	
	Antenna B	Antenna D
2.4	-1.75	0.96

5.5. SOFTWARE AND FIRMWARE

The software installed in the EUT during testing was 13E31820k.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

5.6. WORST-CASE CONFIGURATION AND MODE

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X/Y/Z, it was determined that Y orientation was the worst-case orientation. Therefore, all final radiated testing was performed with the EUT in Y orientation.

Worst-case data rates were:

GFSK mode: DH5
8PSK mode: 3-DH5

DQPSK mode has been verified to have the lowest power.

There are two vendors of the WiFi/Bluetooth radio modules: variant 1 and variant 2. The Wi-Fi/Bluetooth radio modules have the same mechanical outline (e.g., the same package dimension and pin-out layout), use the same on-board antenna matching circuit, have an identical antenna structure, and are built and tested to conform to the same specifications and to operate within the same tolerances.

Baseline testing was performed on the two variants to determine the worst case on all conducted power and radiated emissions.

For simultaneous transmission of multiple channels from the same antenna in the 2.4 GHz and Cellular bands, tests were conducted for various configurations having the highest power, least separation in frequencies and widest operation bandwidths. No noticeable new emission was found. Simultaneous transmission does not support BT/BLE High Power Mode.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

5.7. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Description	Manufacturer	Model	Serial Number	FCC ID
Laptop	Dell	Latitude 3540	6LNG802	N/A
Laptop AC/DC adapter	Dell	FA90PE1-00	CN-0CM889-73245-95L-4954-A00	N/A
Earphone	Apple	NA	NA	N/A
EUT AC/DC adapter	Apple	A1385	D293062F3WVDHLHCF	N/A

I/O CABLES (CONDUCTED TEST)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	Antenna	1	SMA	Un-Shielded	0.2	To spectrum Analyzer
2	USB	1	USB	Shielded	1	N/A
3	AC	1	AC	Un-shielded	3	N/A

I/O CABLES (RADIATED ABOVE 1 GHZ)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
None Used						

I/O CABLES (RADAITED BELOW 1 GHZ)

I/O Cable List						
Cable No	Port	# of identical	Connector Type	Cable Type	Cable Length (m)	Remarks
1	Headphones Jack	1	3.5mm Audio	Shielded	0.9	N/A
2	AC	1	AC	Un-shielded	3	N/A

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

I/O CABLES (AC LINE CONDUCTED: AC/DC ADAPTER)

I/O Cable List						
Cable No	Port	# of identical	Connector Type	Cable Type	Cable Length (m)	Remarks
1	Headphones Jack	1	3.5mm Audio	Shielded	0.9	N/A
2	AC	1	AC	Un-shielded	3	N/A

I/O CABLES (AC LINE CONDUCTED: LAPTOP CONFIGUARTION)

I/O Cable List						
Cable No	Port	# of identical	Connector Type	Cable Type	Cable Length (m)	Remarks
1	Headphones Jack	1	3.5mm Audio	Shielded	0.9	N/A
2	USB	1	USB	Shielded	1	N/A
3	AC	1	AC	Un-shielded	3	N/A

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

TEST SETUP - CONDUCTED TESTS

The EUT was tested connected to a host Laptop via USB cable adapter and spectrum analyzer to antenna port. Test software exercised the EUT.

SETUP DIAGRAM

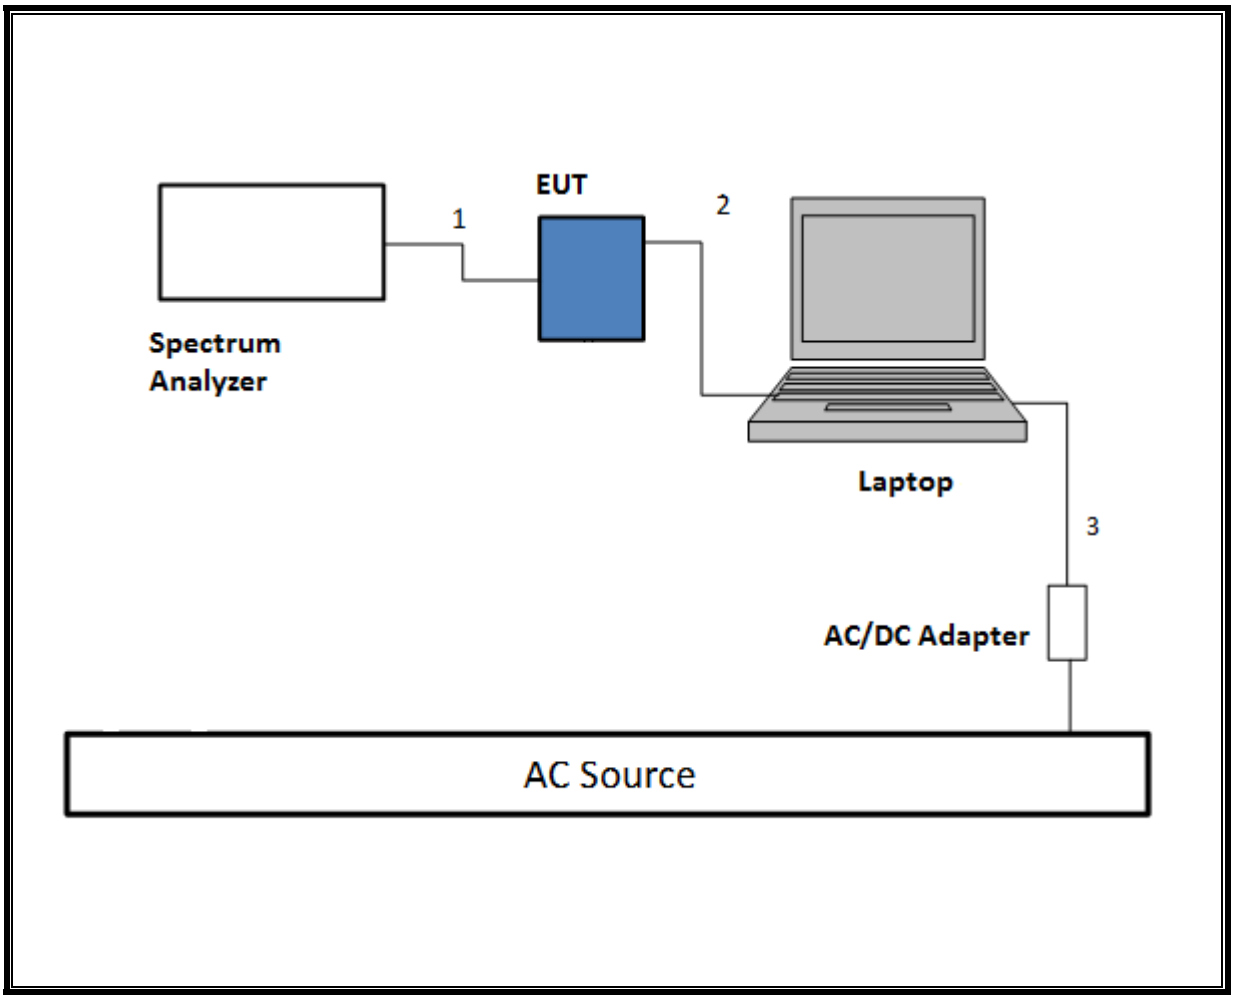

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

TEST SETUP- RADIATED-ABOVE 1 GHZ

The EUT was tested battery powered. Test software exercised the EUT.

SETUP DIAGRAM

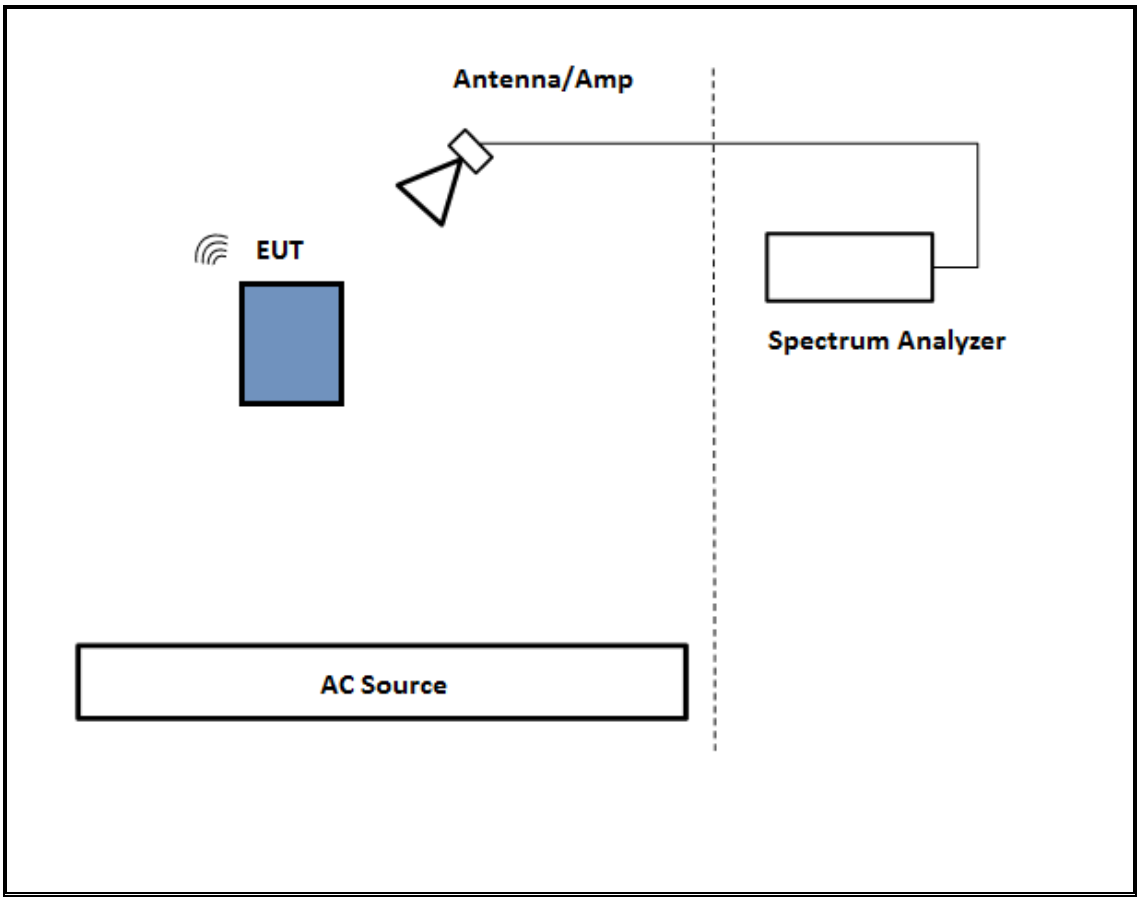

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

TEST SETUP- BELOW 1GHz

The EUT was tested with earphone connected and powered by AC adapter. Test software exercised the EUT.

SETUP DIAGRAM

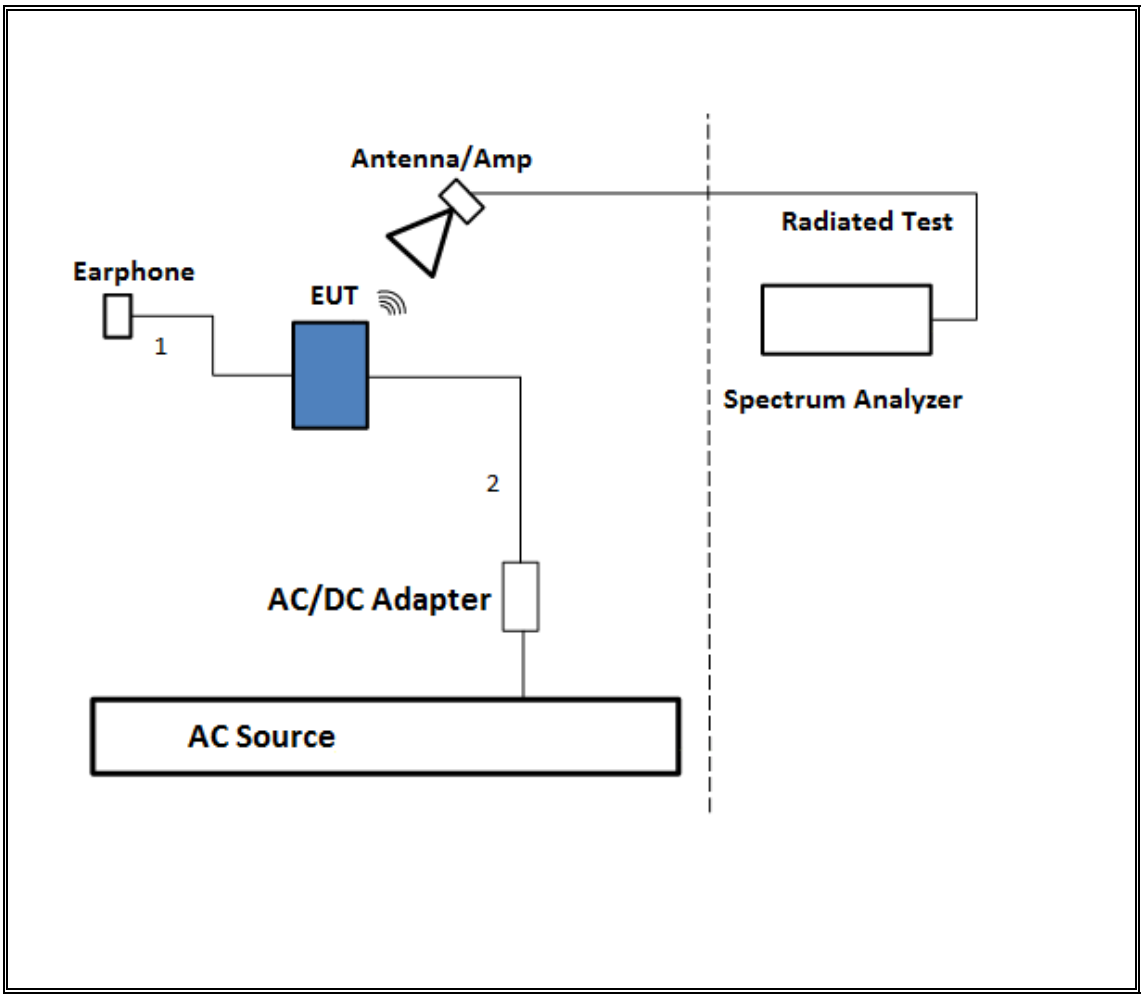

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

TEST SETUP- AC LINE CONDUCTED: AC/DC ADAPTER

The EUT was tested with earphone connected and powered by AC/DC adapter via USB cable. Test software exercised the EUT.

SETUP DIAGRAM

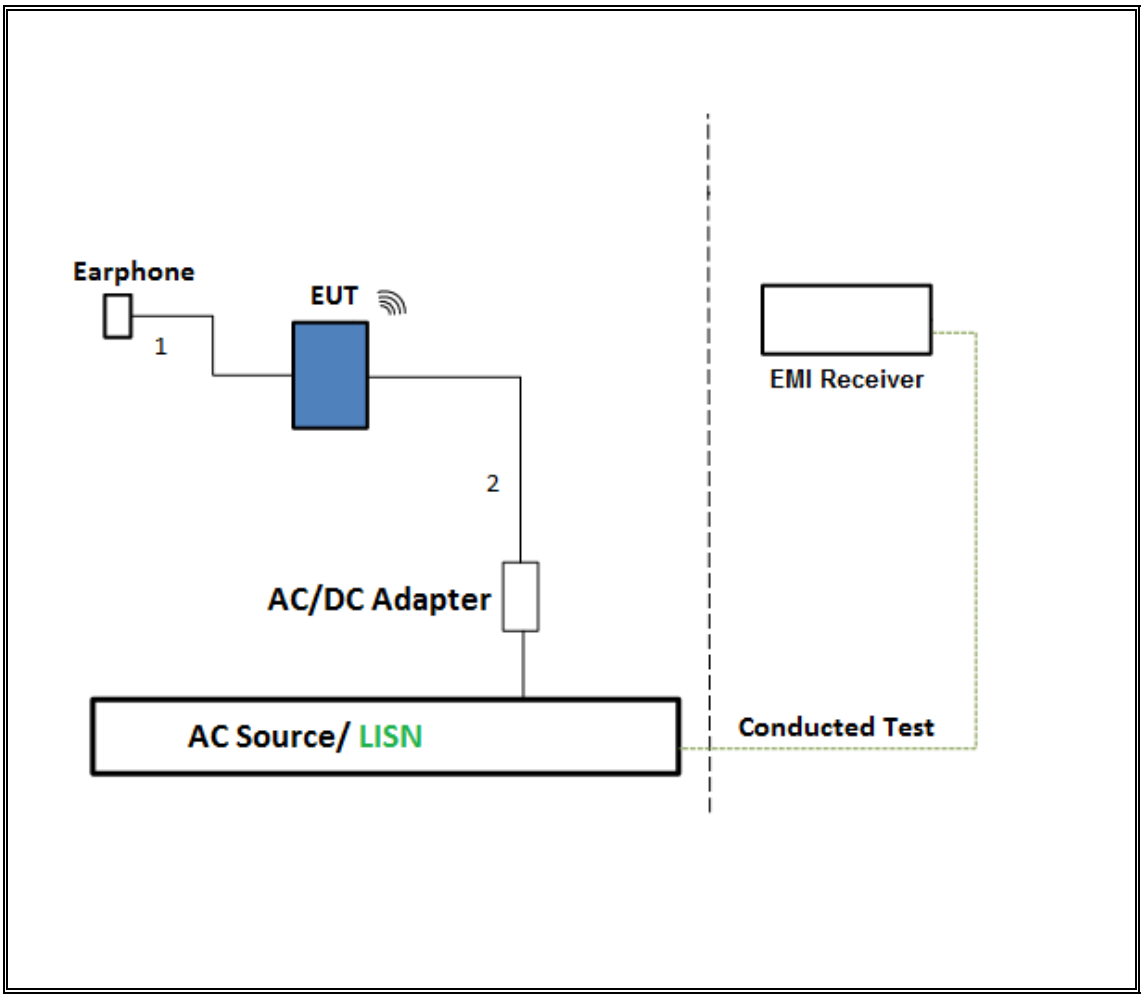

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

TEST SETUP- AC LINE CONDUCTED: LAPTOP CONFIGURATION

The EUT was tested with earphone connected and powered by host PC via USB cable. Test software exercised the EUT.

SETUP DIAGRAM

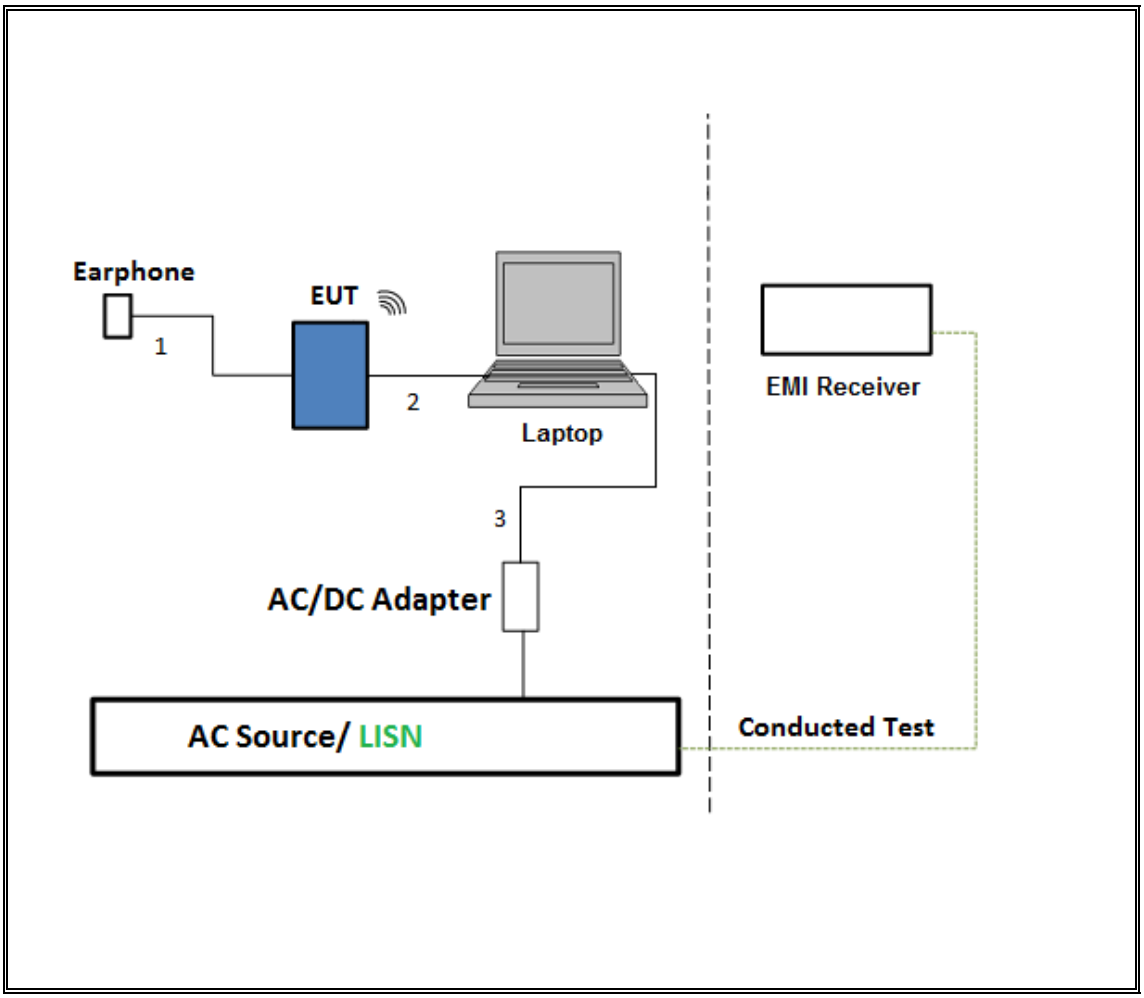

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	**Manufacturer**	**Model**	**Cal Date**	**Cal Due**
Antenna, Horn 1-18GHz	ETS Lindgren	3117	2/10/2015	2/10/2016
Antenna, Broadband Hybrid, 30MHz to 2000MHz	Sunol Sciences	JB1	9/25/2015	9/25/2016
Amplifier, 1 - 18GHz	Miteq	AFS42-00101800-25-S-42	8/12/2015	8/12/2016
Amplifier, 1 - 18GHz	Miteq	AMF-4D-01000800-30-29P	8/12/2015	8/12/2016
Amplifier, 10KHz to 1GHz, 32dB	Sonoma	310N	6/9/2015	6/9/2016
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent	N9030A	3/31/2015	3/31/2016
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent	N9030A	11/19/2015	11/19/2016
Power Meter, P-series single channel	Agilent	N1911A	4/7/2015	4/7/2016
Power Sensor, P - series, 50MHz to 18GHz, Wideband	Agilent	N1921A	2/27/2015	2/27/2016
Antenna, Horn 18 to 26.5GHz	ARA	MWH-1826	5/12/2015	5/12/2016
Spectrum Analyzer, 40 GHz	Agilent	8564E	8/14/2015	8/14/2016
Amplifier, 1 to 26.5GHz, 23.5dB Gain minimum	Agilent	8449B	6/29/2015	6/29/2016
AC Line Conducted				
EMI Test Receiver 9Khz-7GHz	Rohde & Schwarz	ECSI7	08/07/15	08/07/16
LISN for Conducted Emissions CISPR-16	FCC	50/250-25-2	01/16/15	01/16/16
LISN for Conducted Emissions CISPR-16	Fisher	50/250-2-01	09/16/15	09/16/16
Power Cable, Line Conducted Emissions	U L	PG1	7/28/2015	7/28/2016
UL SOFTWARE				
* Radiated Software	UL	UL EMC	Ver 9.5, July 22, 2014	
* Conducted Software	UL	UL EMC	Ver 2.2, March 31, 2015	
* AC Line Conducted Software	UL	UL EMC	Ver 9.5, April 3, 2015	

Note: * indicates automation software version used in the compliance certification testing

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

7. ANTENNA PORT TEST RESULTS

7.1. ON TIME AND DUTY CYCLE

LIMITS

None; for reporting purposes only.

PROCEDURE

KDB 558074 Zero-Span Spectrum Analyzer Method.

ON TIME AND DUTY CYCLE RESULTS

Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/B Minimum VBW (kHz)
GFSK Ant. B High Power Mode	100.000	100.000	1.000	100.00%	0.00	0.010
GFSK Ant. B Low Power Mode	100.000	100.000	1.000	100.00%	0.00	0.010
8PSK Ant. B High Power Mode	100.000	100.000	1.000	100.00%	0.00	0.010
8PSK Ant. B Low Power Mode	100.000	100.000	1.000	100.00%	0.00	0.010
GFSK Ant. D High Power Mode	100.000	100.000	1.000	100.00%	0.00	0.010
GFSK Ant. D Low Power Mode	100.000	100.000	1.000	100.00%	0.00	0.010
8PSK Ant. D High Power Mode	100.000	100.000	1.000	100.00%	0.00	0.010
8PSK Ant. D Low Power Mode	100.000	100.000	1.000	100.00%	0.00	0.010

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

DUTY CYCLE PLOTS

HOPPING OFF

DUTY CYCLE GFSK ANTENNA B HIGH POWER MODE

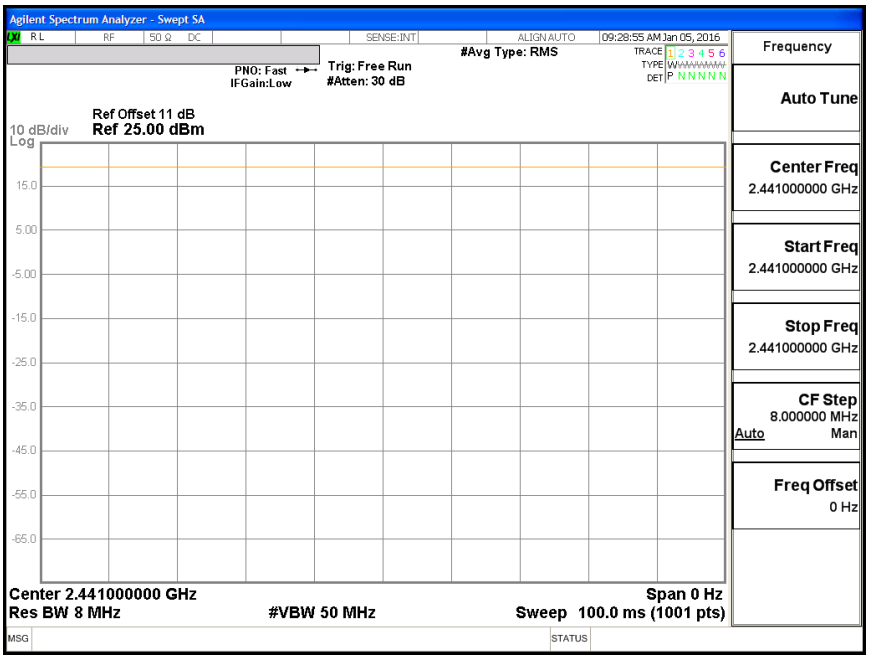

DUTY CYCLE GFSK ANTENNA B LOW POWER MODE

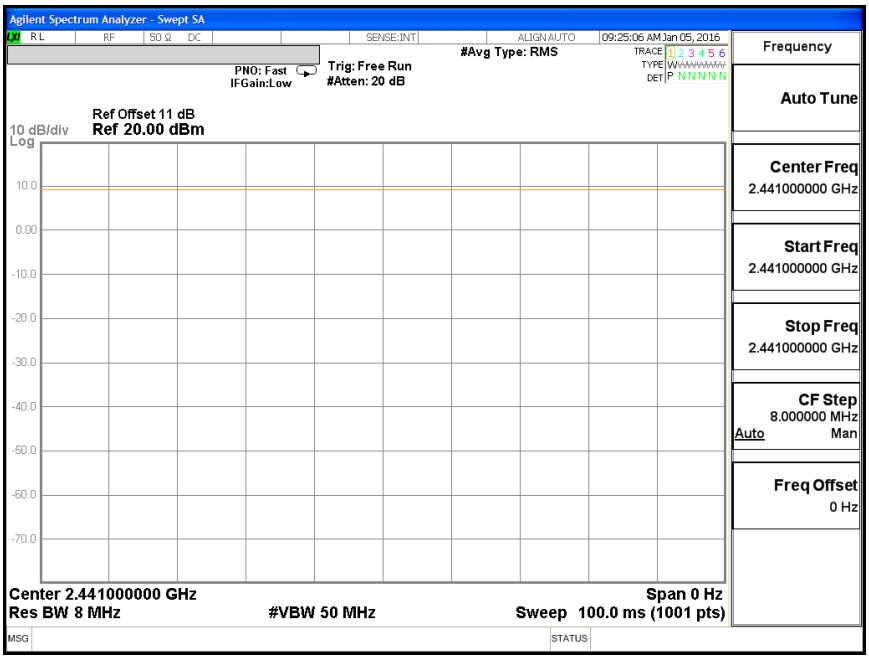

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

DUTY CYCLE 8PSK ANTENNA B HIGH POWER MODE

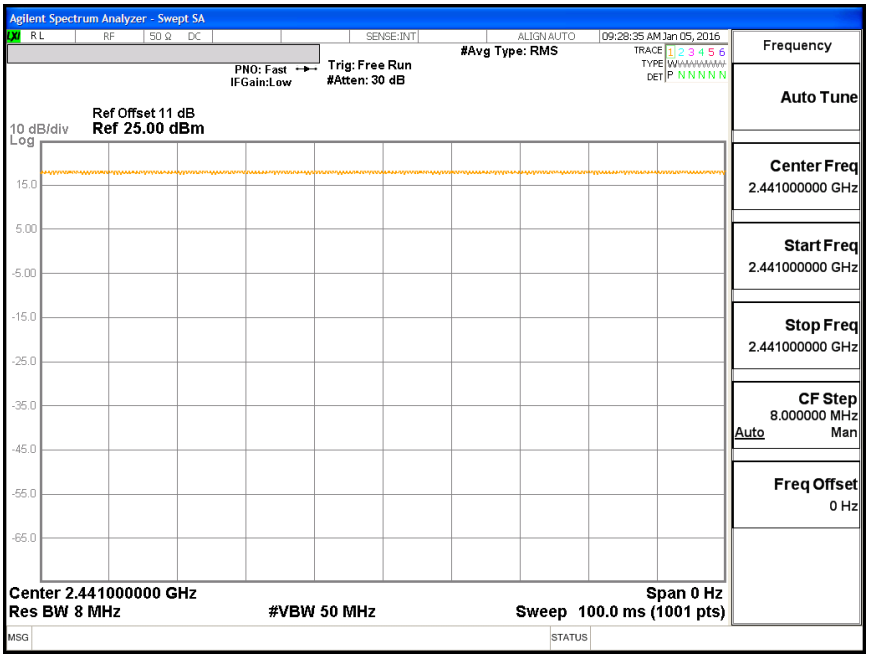

DUTY CYCLE 8PSK ANTENNA B LOW POWER MODE

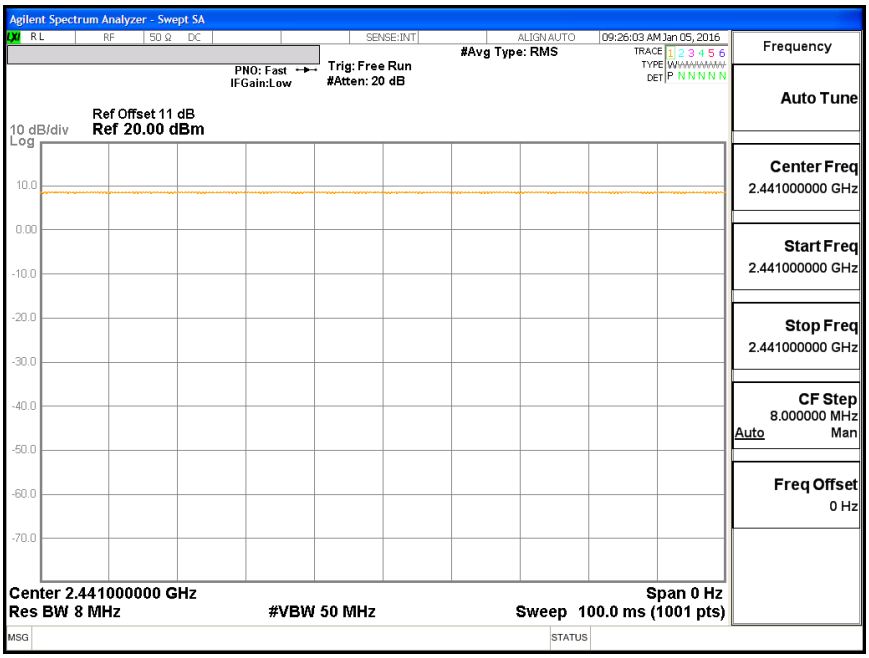

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

DUTY CYCLE GFSK ANTENNA D HIGH POWER MODE

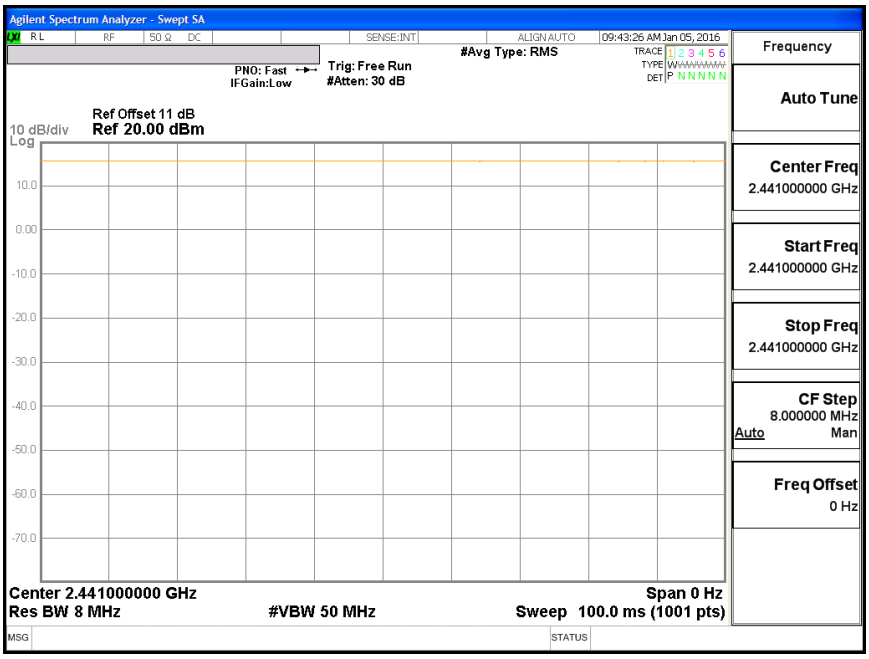

DUTY CYCLE GFSK ANTENNA D LOW POWER MODE

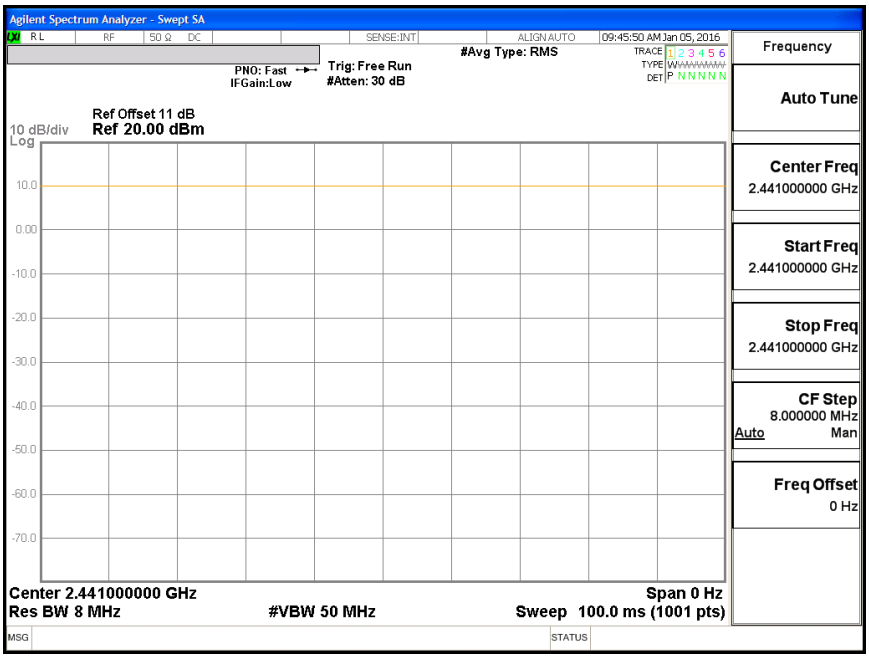

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

DUTY CYCLE 8PSK ANTENNA D HIGH POWER MODE

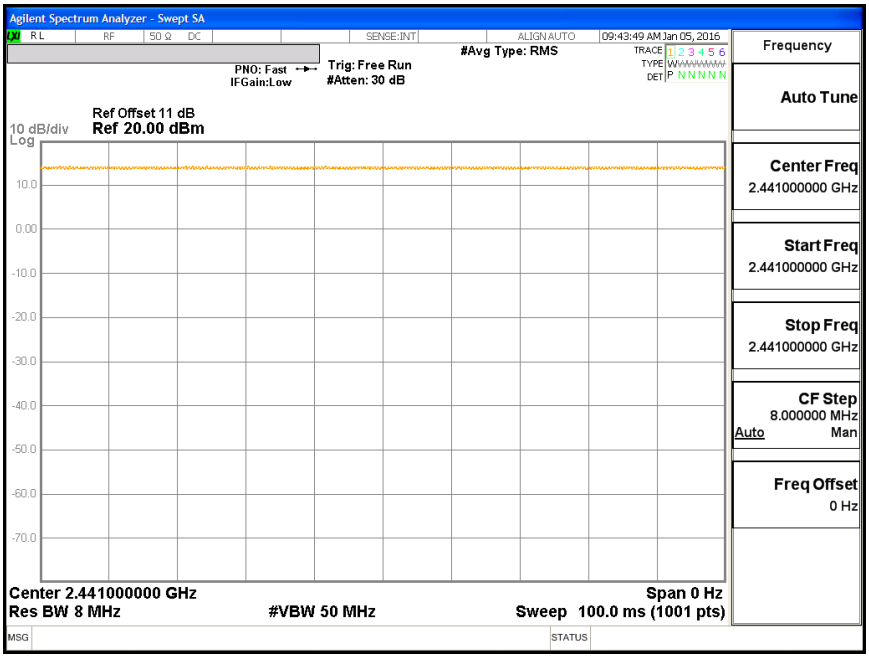

DUTY CYCLE 8PSK ANTENNA D LOW POWER MODE

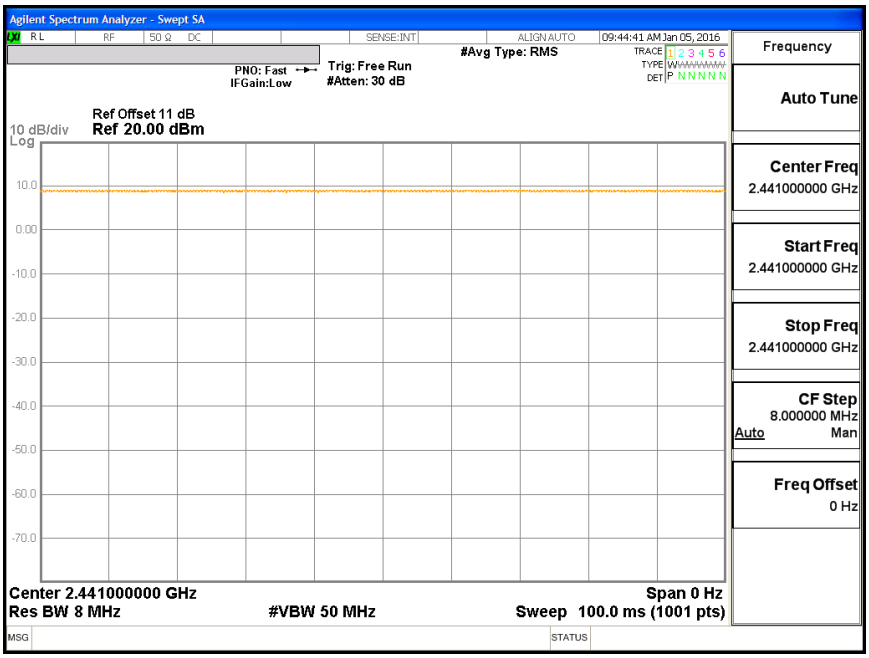

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

7.2. ANTENNA B HIGH POWER BASIC DATA RATE GFSK MODULATION

7.2.1. 20 dB AND 99% BANDWIDTH

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to ≥ 1% of the 20 dB bandwidth. The VBW is set to ≥ RBW. The sweep time is coupled.

RESULTS

Channel	Frequency (MHz)	20 dB Bandwidth (KHz)	99% Bandwidth (KHz)
Low	2402	872.6	864.07
Middle	2441	916.6	875.68
High	2480	843.9	863.35

20 dB AND 99% BANDWIDTH

BANDWIDTH LOW CH

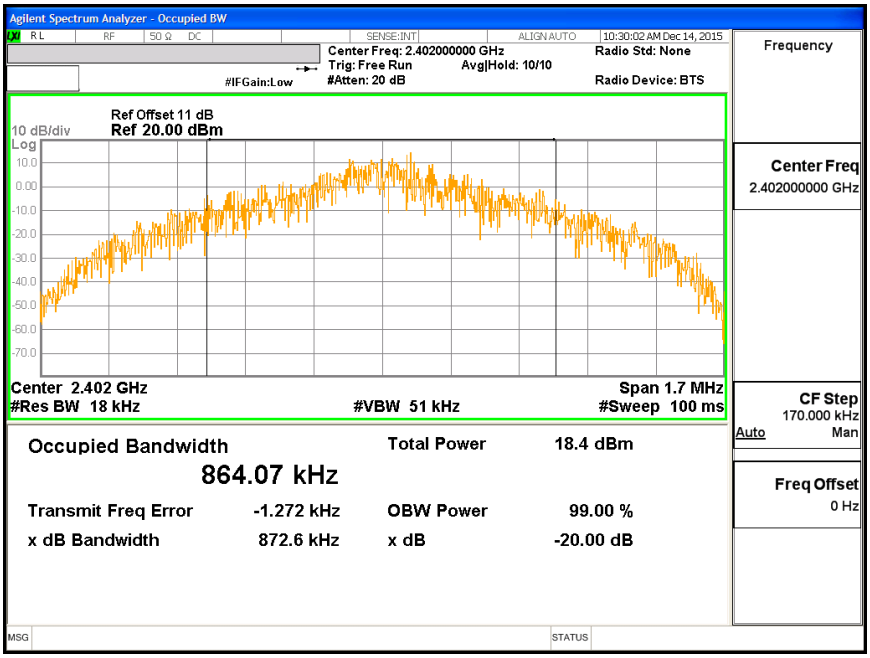

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

BANDWIDTH MID CH

BANDWIDTH HIGH CH

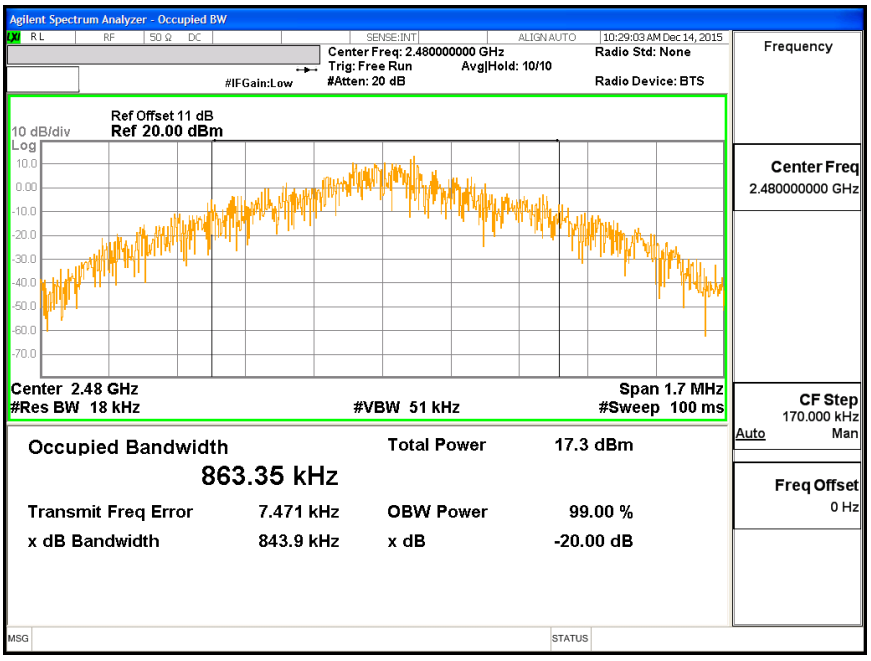

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

7.2.2. HOPPING FREQUENCY SEPARATION

LIMIT

FCC §15.247 (a) (1)

IC RSS-247 (5.1) (2)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hoping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 300 kHz and the VBW is set to 910 kHz. The sweep time is coupled.

RESULTS

HOPPING FREQUENCY SEPARATION

HOPPING FREQUENCY SEPARATION

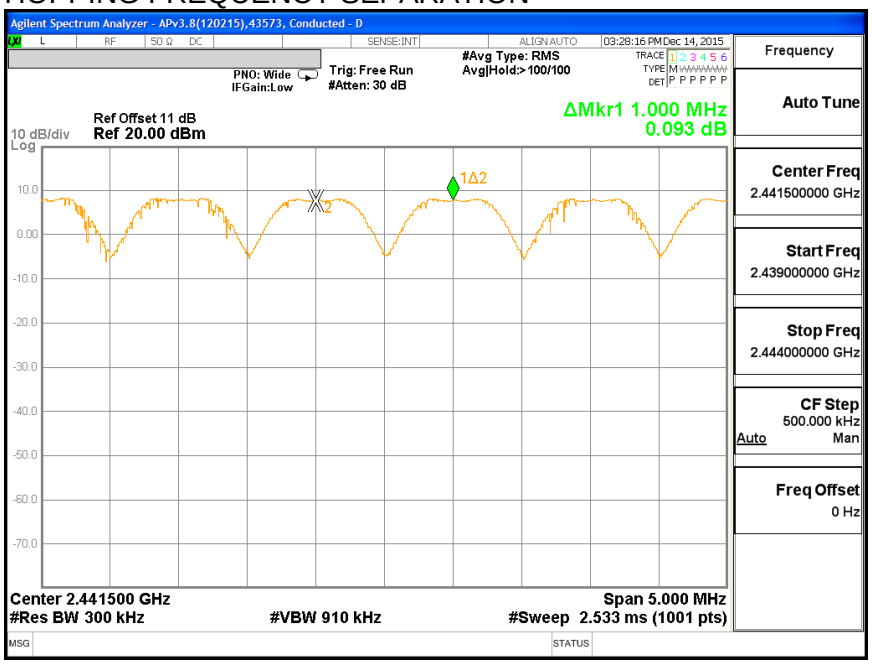

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

7.2.3. NUMBER OF HOPPING CHANNELS

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-247 (5.1) (4)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.

RESULTS

Normal Mode: 79 Channels observed.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

NUMBER OF HOPPING CHANNELS

NUMBER OF HOPPING CHANNELS (100 MHZ SPAN)

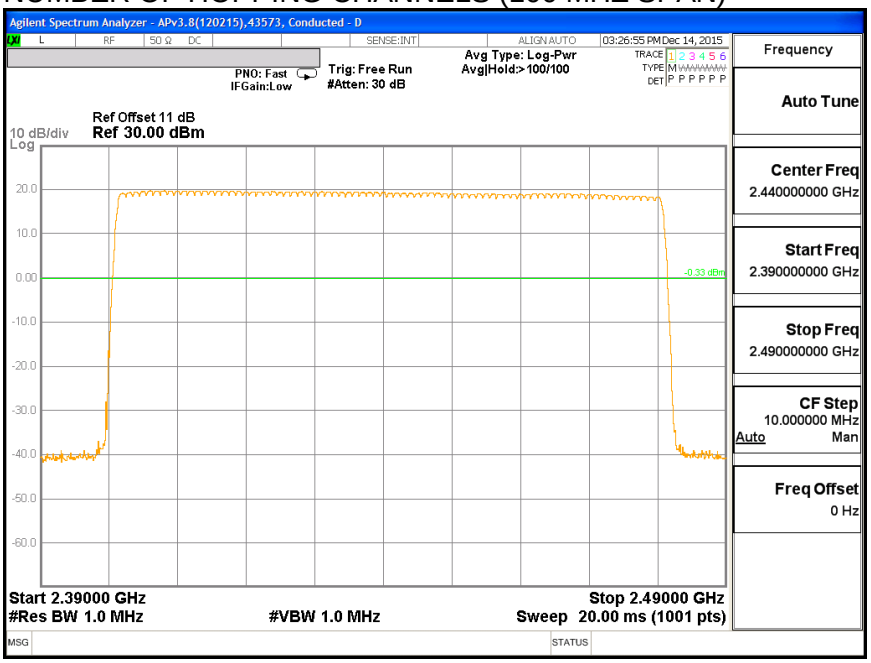

NUMBER OF HOPPING CHANNELS (30 MHZ SPAN, FIRST SEGMENT)

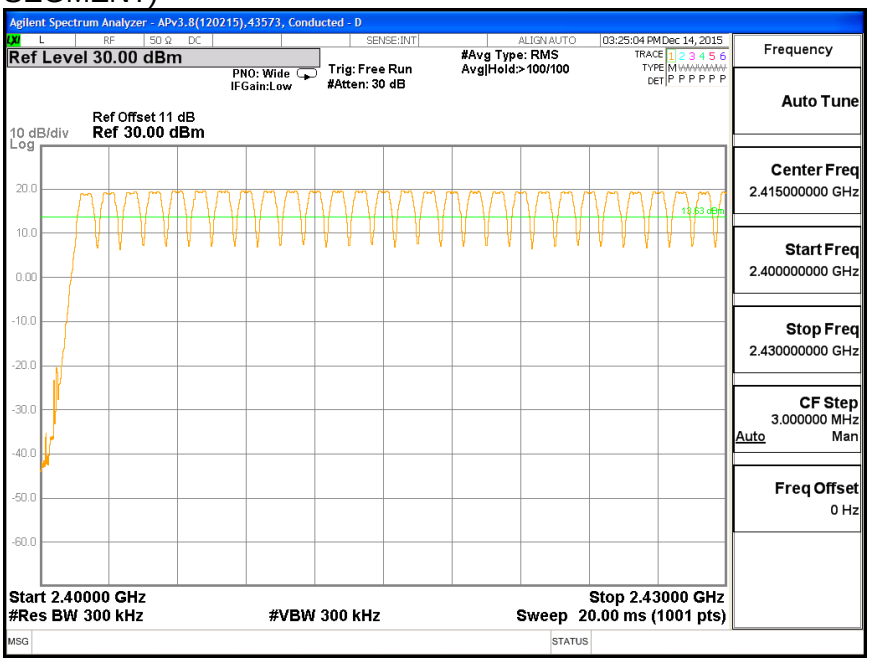

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

NUMBER OF HOPPING CHANNELS (30 MHZ SPAN, SECOND SEGMENT)

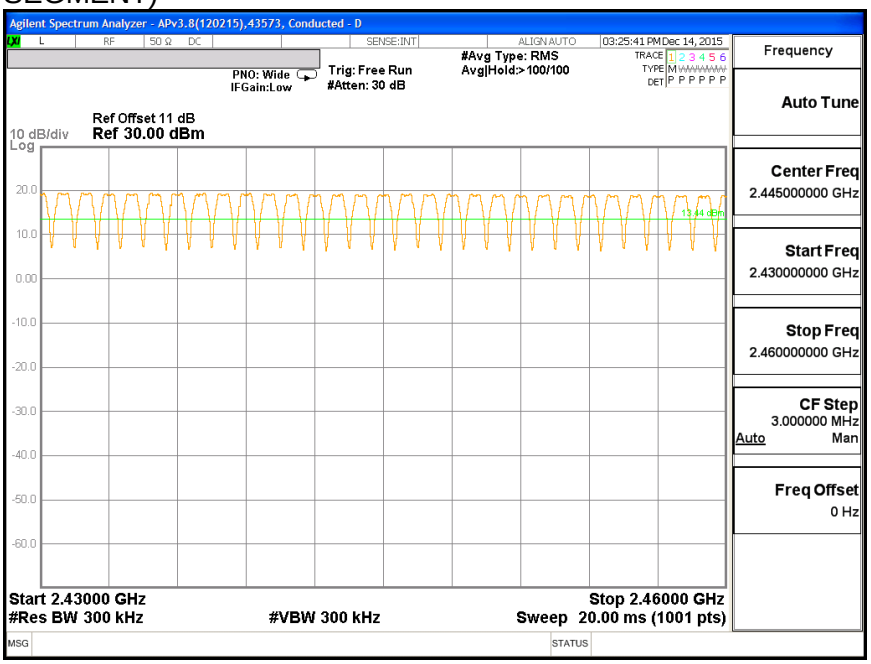

NUMBER OF HOPPING CHANNELS (30 MHZ SPAN, THIRD SEGMENT)

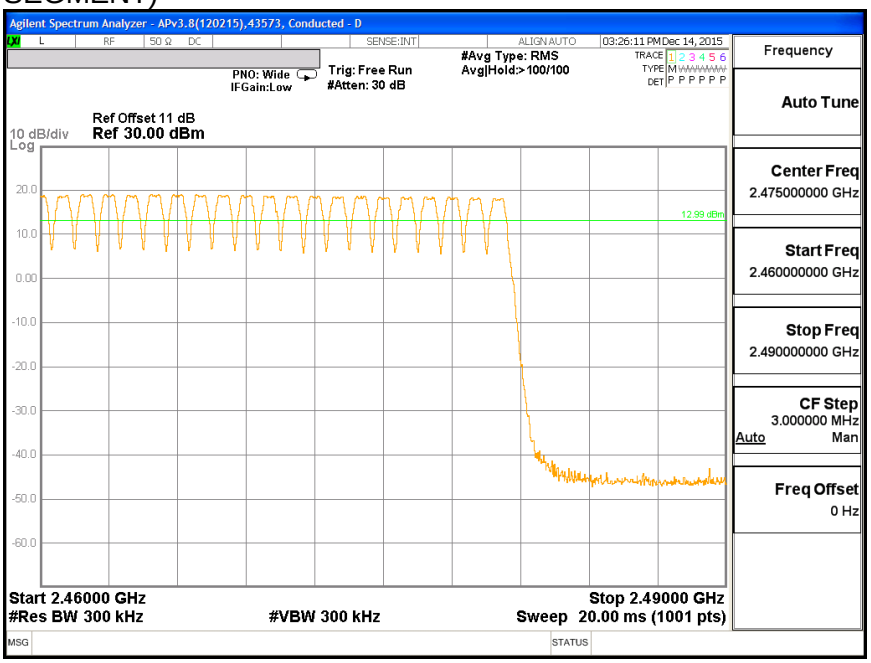

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

7.2.4. AVERAGE TIME OF OCCUPANCY

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-247 (5.1) (4)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.

The average time of occupancy in the specified 31.6 second period (79 channels * 0.4 s) is equal to 10 * (# of pulses in 3.16 s) * pulse width.

For AFH mode, the average time of occupancy in the specified 8 second period (20 channels * 0.4 seconds) is equal to 10 * (# of pulses in 0.8 s) * pulse width.

RESULTS

DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK Normal Mode					
DH1	0.386	32	0.124	0.4	-0.276
DH3	1.640	18	0.295	0.4	-0.105
DH5	2.888	12	0.347	0.4	-0.053

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

PULSE WIDTH - DH1

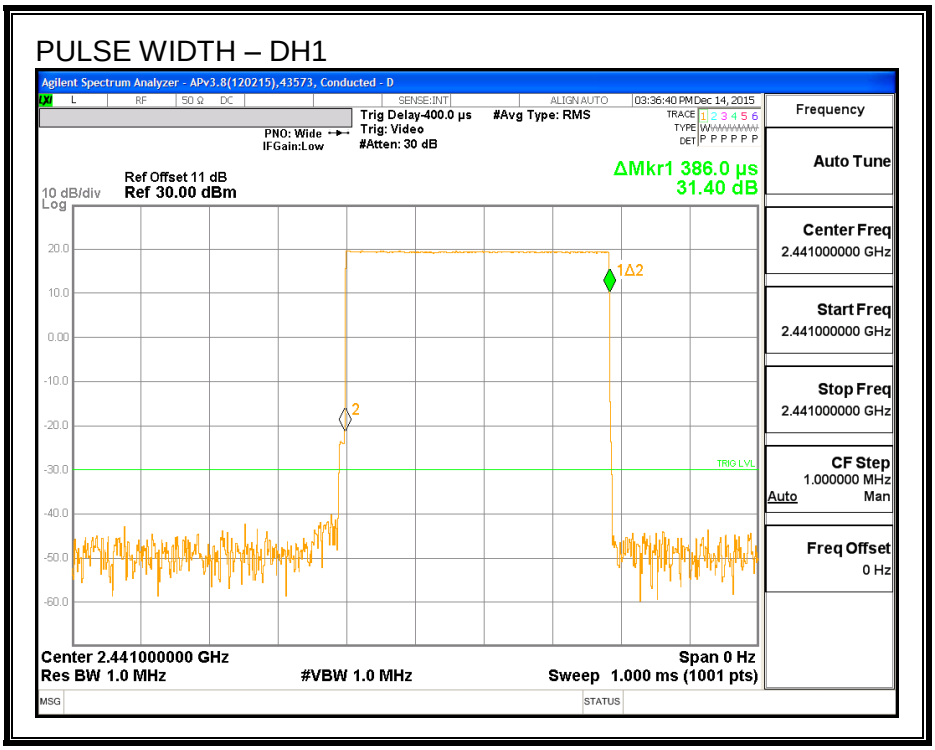

NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH1

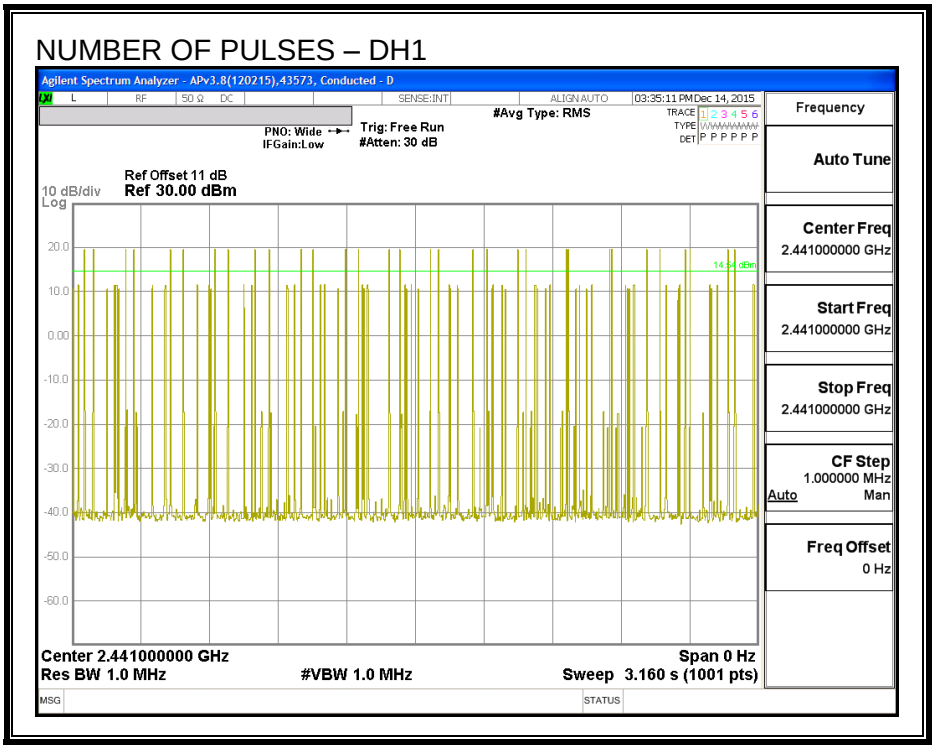

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

PULSE WIDTH – DH3

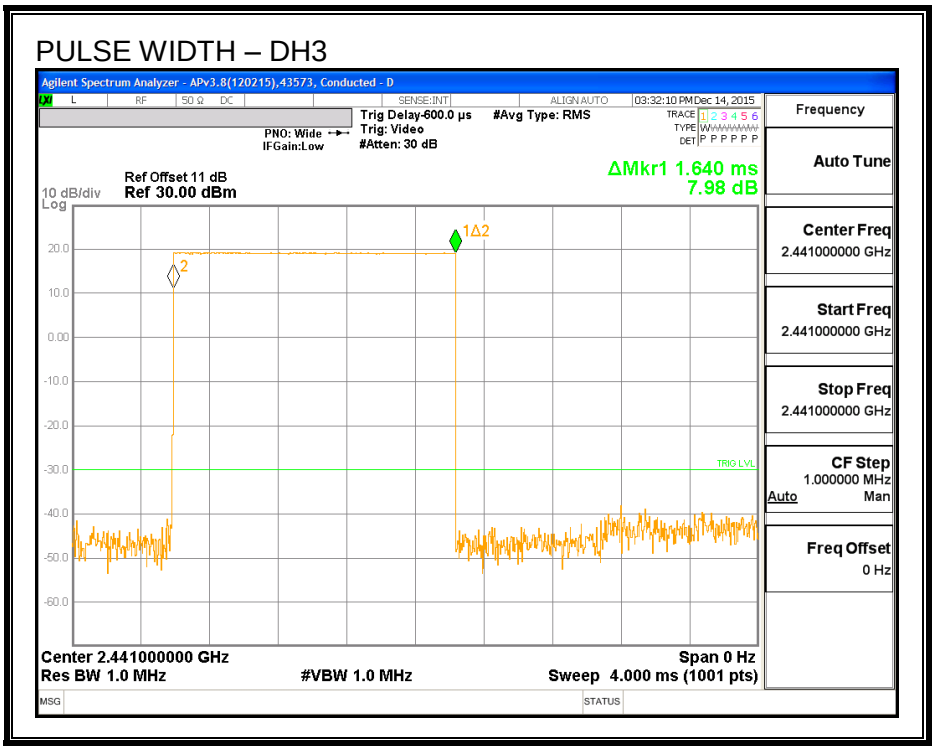

NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH3

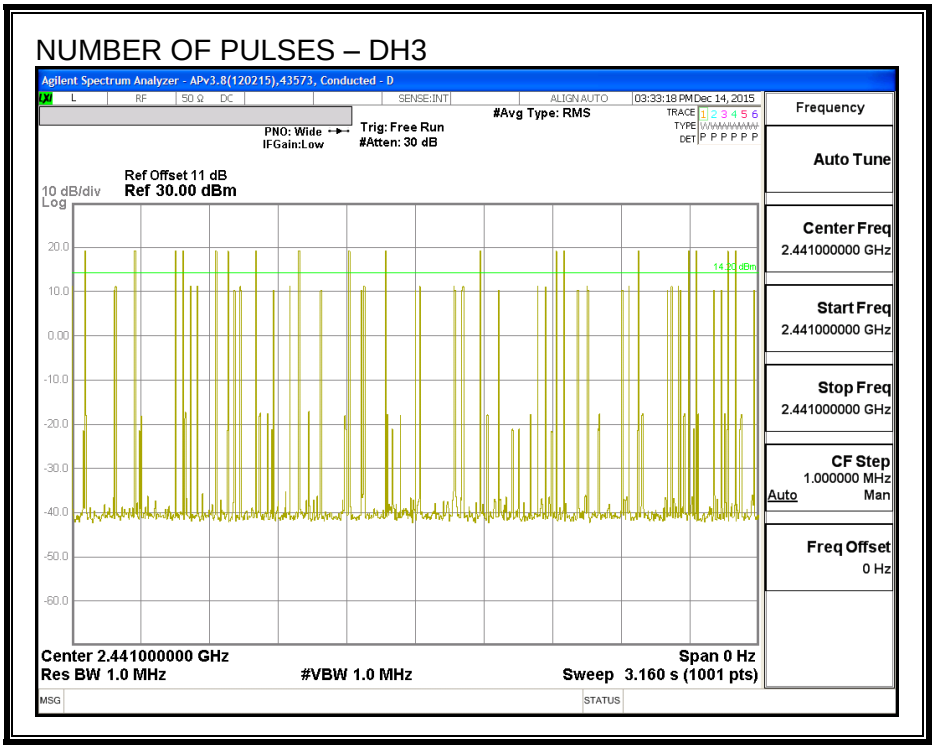

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

PULSE WIDTH – DH5

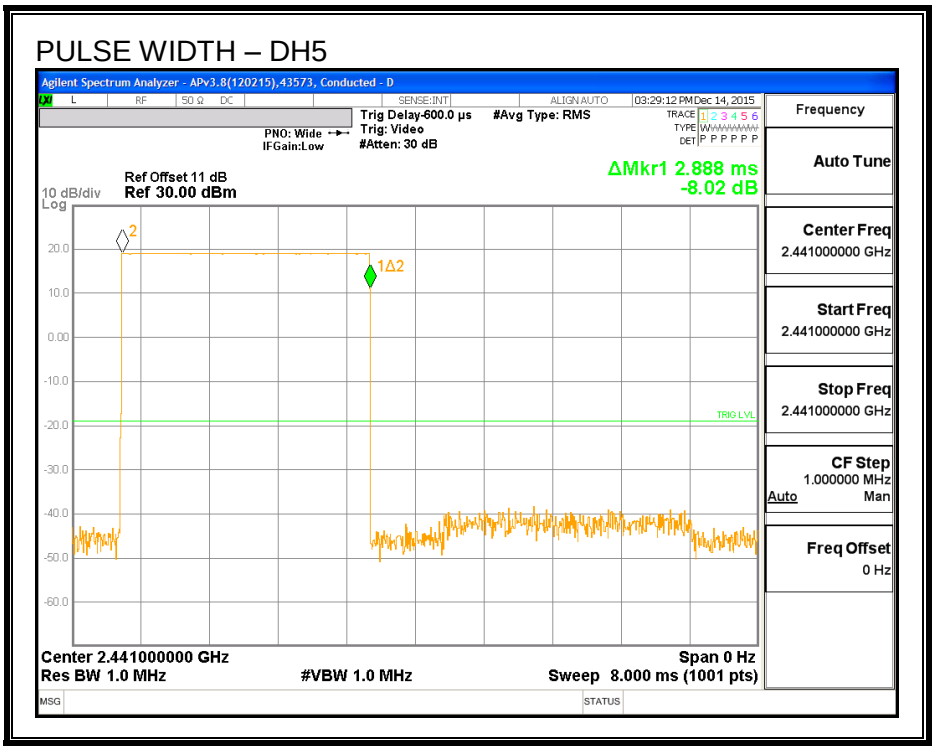

NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH5

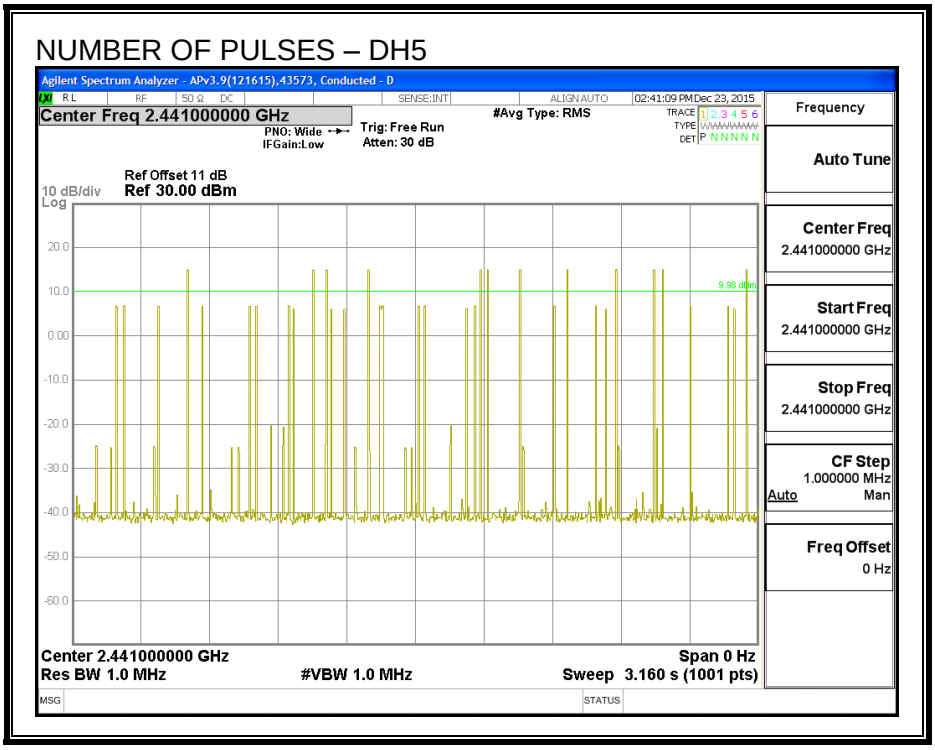

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

7.2.5. OUTPUT POWER

LIMIT

§15.247 (b) (1)

RSS-247 (5.4) (2)

The maximum antenna gain is less than 6 dBi, therefore the limit is 30 dBm.

TEST PROCEDURE

The transmitter output is connected to a wideband peak and average power meter.

RESULTS

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	16.95	30	-13.05
Middle	2441	16.93	30	-13.07
High	2480	17.18	30	-12.82

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

7.2.6. AVERAGE POWER

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 11 dB (including 10 dB pad and 1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	16.73
Middle	2441	16.69
High	2480	16.94

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

7.2.7. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-247 (5.5)

Limit = -20 dBc

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.

RESULTS

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

SPURIOUS EMISSIONS, LOW CHANNEL

LOW CHANNEL BANDEDGE

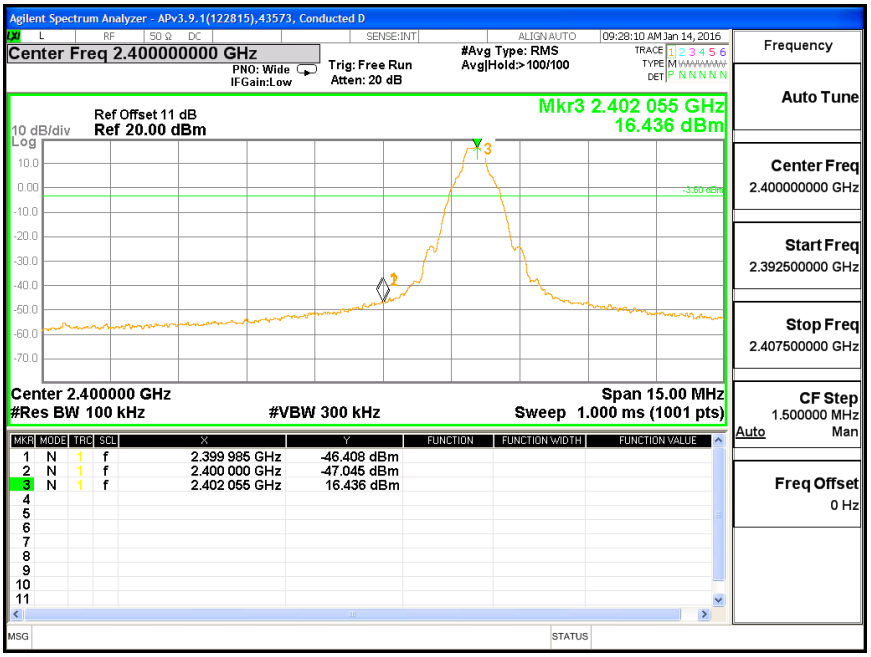

LOW CHANNEL SPURIOUS

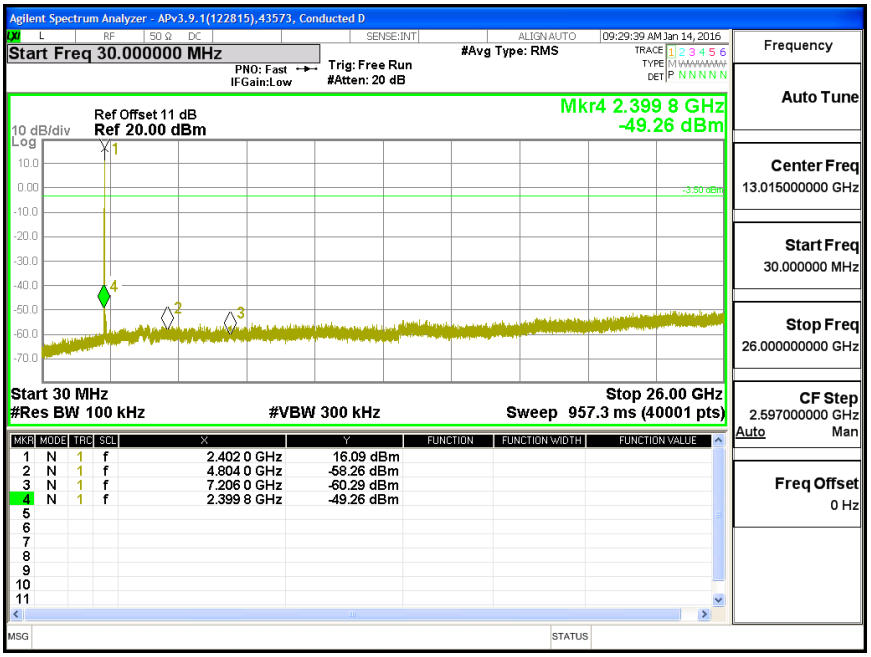

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

SPURIOUS EMISSIONS, MID CHANNEL

MID CHANNEL

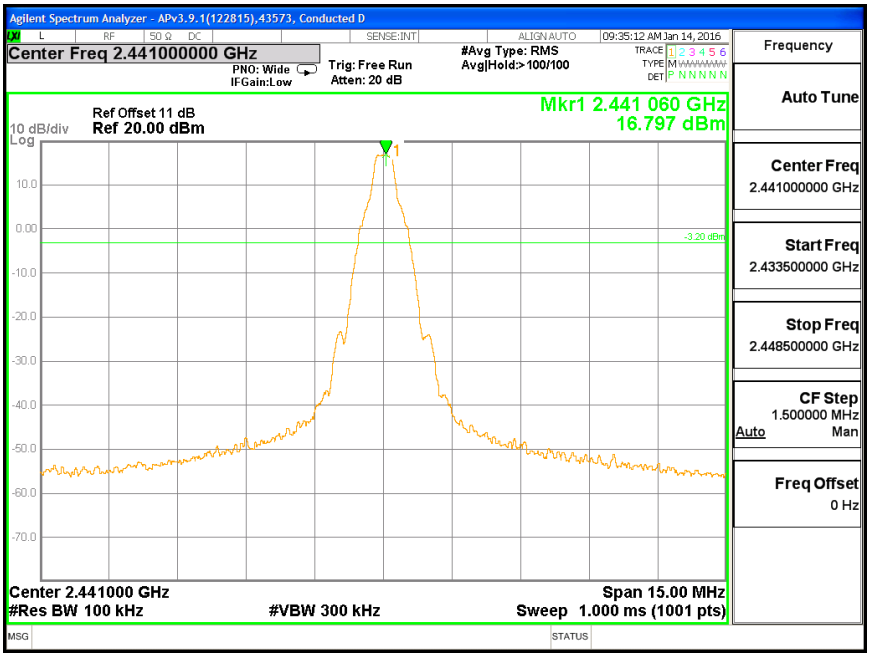

MID CHANNEL SPURIOUS

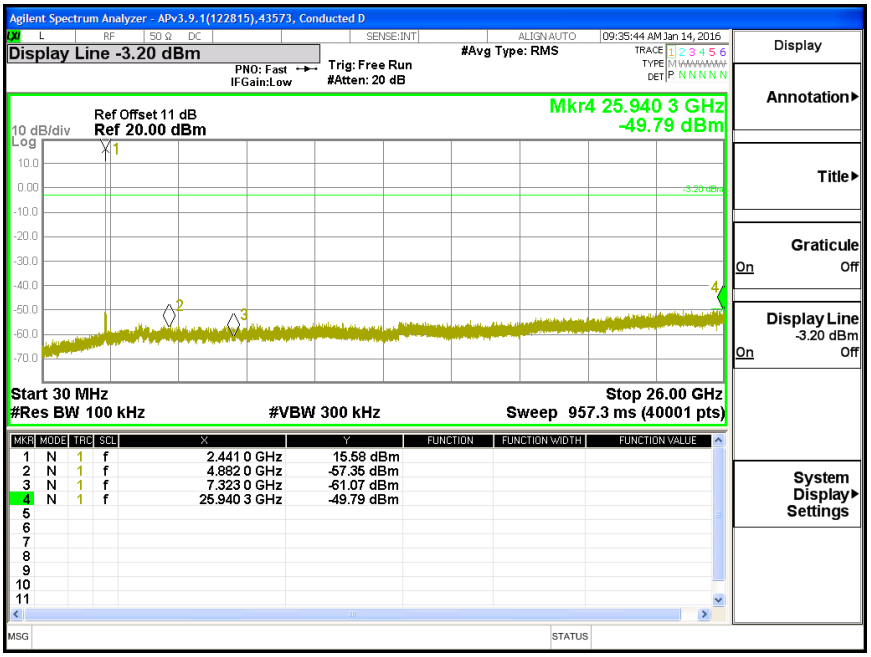

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

SPURIOUS EMISSIONS, HIGH CHANNEL

HIGH CHANNEL BANDEDGE

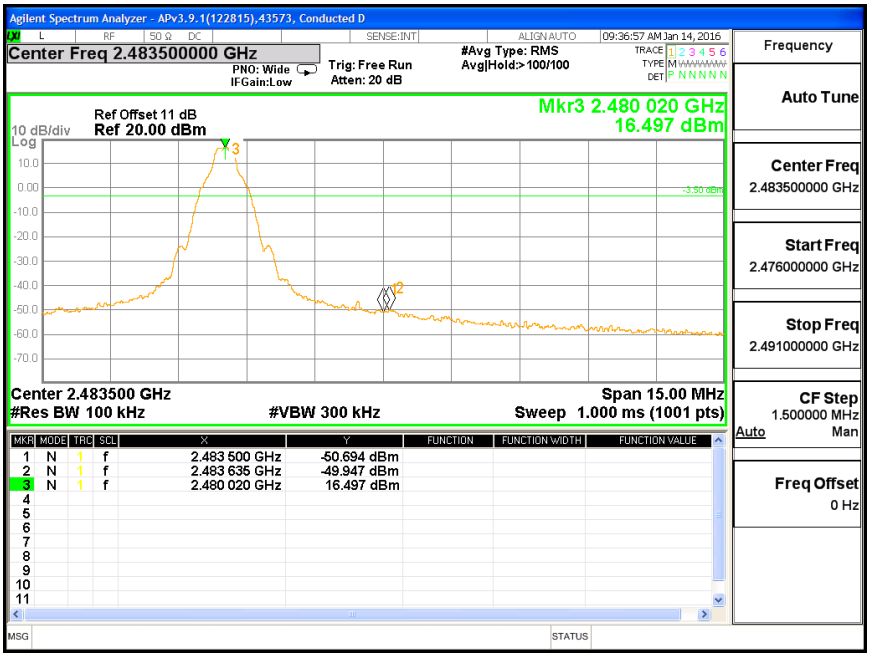

HIGH CHANNEL SPURIOUS

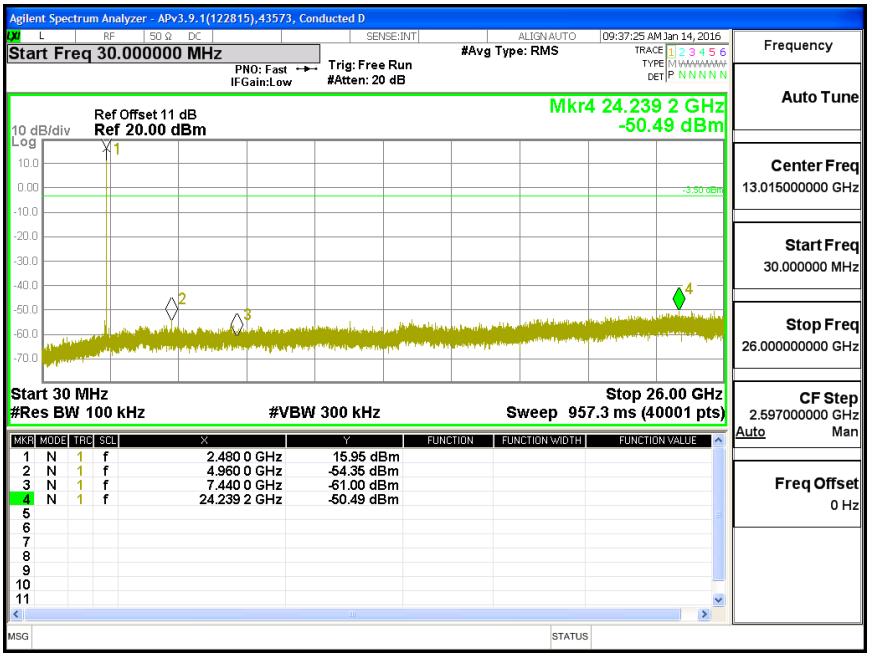

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

LOW BANDEDGE WITH HOPPING ON

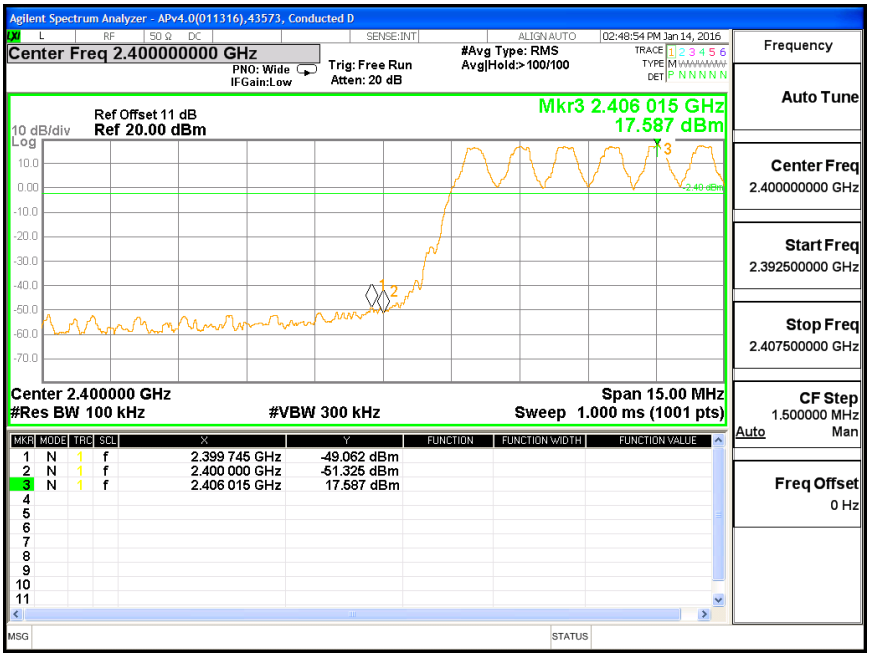

HIGH BANDEDGE WITH HOPPING ON

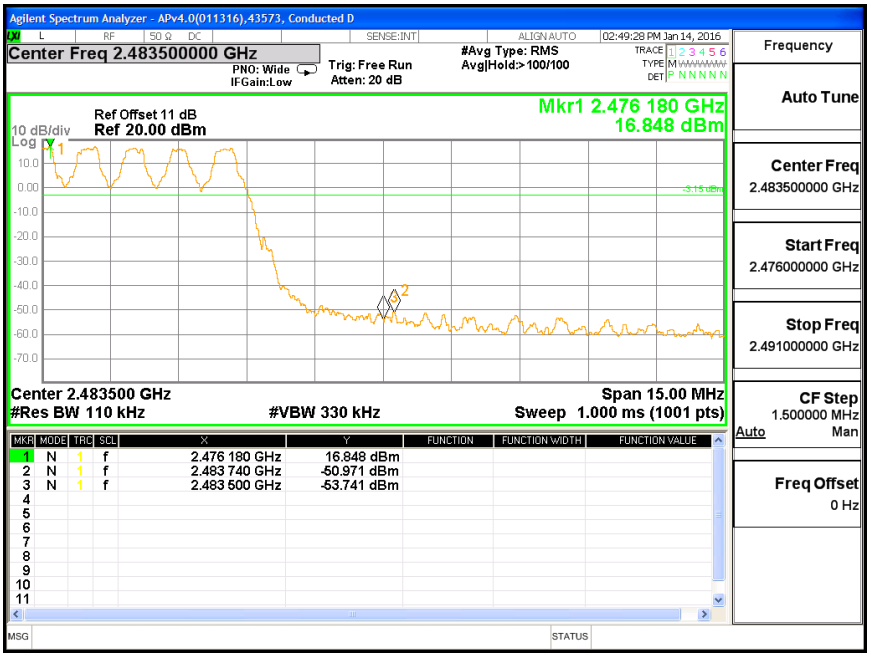

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

7.3. ANTENNA B HIGH POWER ENHANCED DATA RATE QPSK MODULATION

7.3.1. OUTPUT POWER

LIMIT

§15.247 (b) (1)

RSS-247 (5.4) (2)

The maximum antenna gain is less than 6 dBi, therefore the limit is 30 dBm.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE

The transmitter output is connected to a wideband peak and average power meter.

RESULTS

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	14.25	21	-6.72
Middle	2441	14.50	21	-6.47
High	2480	14.46	21	-6.51

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

7.3.2. AVERAGE POWER

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 11 dB (including 10 dB pad and 1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	11.21
Middle	2441	11.49
High	2480	11.23

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

7.4. ANTENNA B HIGH POWER ENHANCED DATA RATE 8PSK MODULATION

7.4.1. 20 dB AND 99% BANDWIDTH

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to ≥ 1% of the 20 dB bandwidth. The VBW is set to ≥ RBW. The sweep time is coupled.

RESULTS

Channel	Frequency (MHz)	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	2402	1.3390	1.2040
Middle	2441	1.3040	1.2201
High	2480	1.3150	1.2148

20 dB AND 99% BANDWIDTH

BANDWIDTH LOW CH

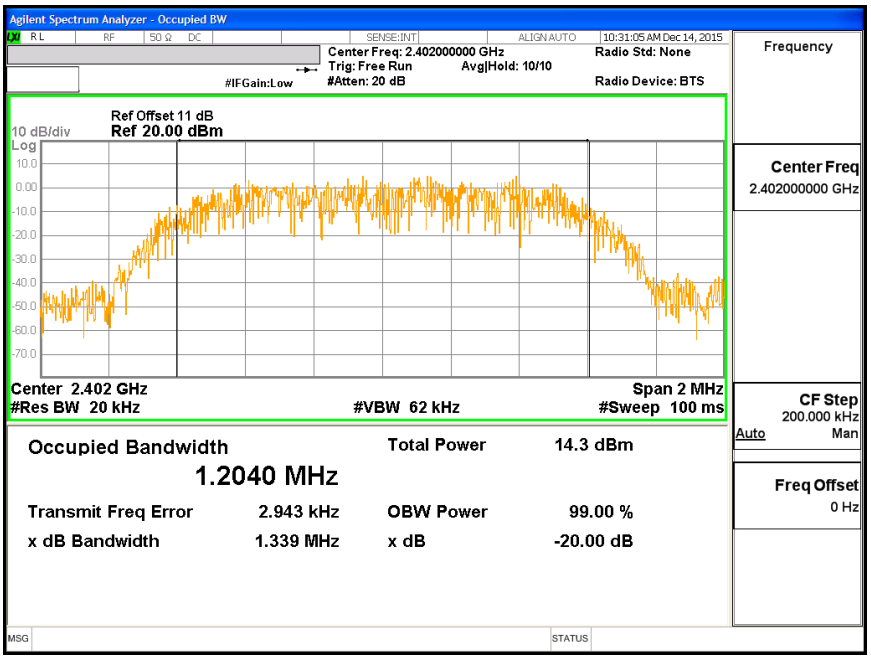

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

BANDWIDTH MID CH

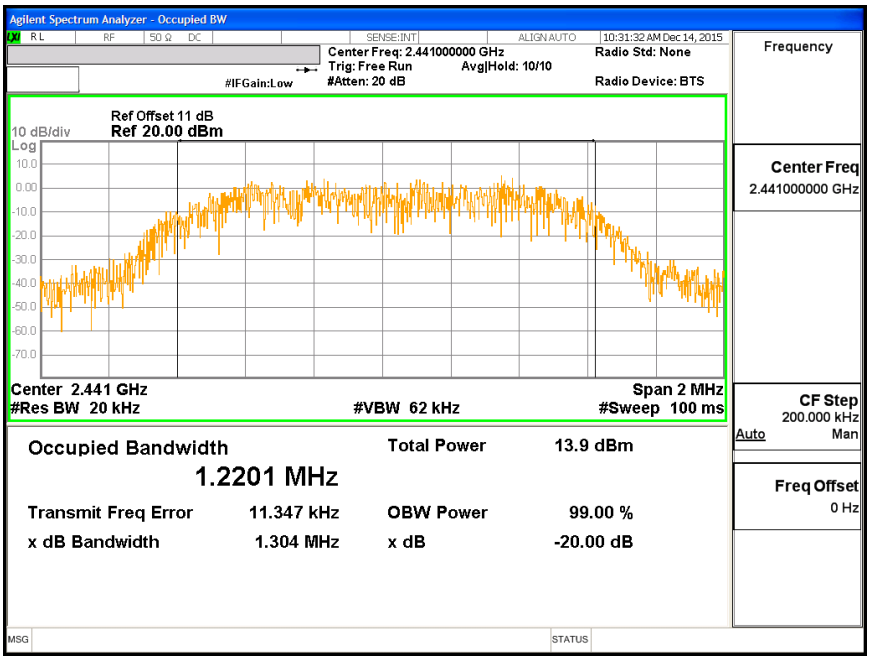

BANDWIDTH HIGH CH

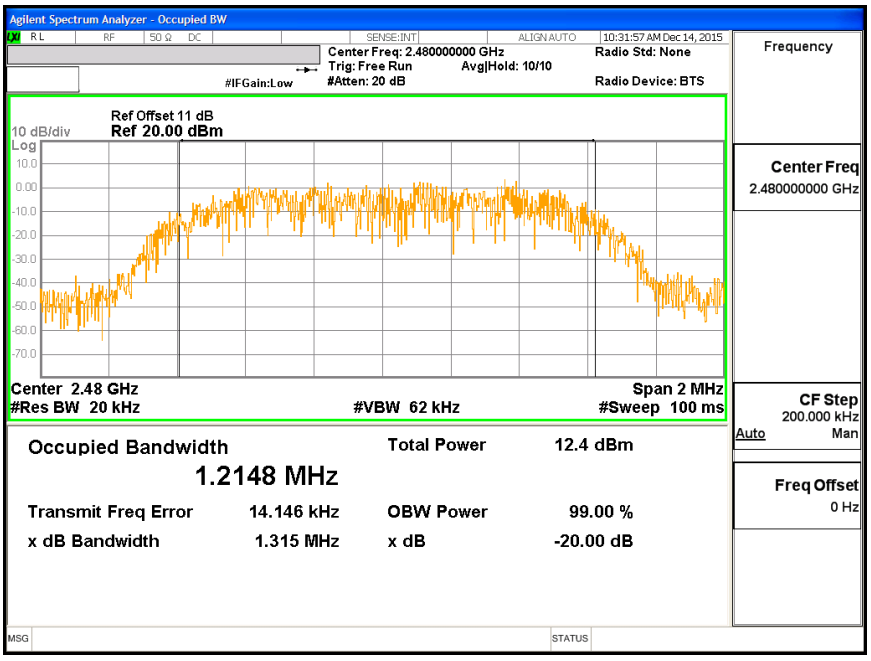

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

7.4.2. HOPPING FREQUENCY SEPARATION

LIMIT

FCC §15.247 (a) (1)

IC RSS-247 (5.1) (2)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hoping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 300 kHz and the VBW is set to 910 kHz. The sweep time is coupled.

RESULTS

HOPPING FREQUENCY SEPARATION

HOPPING FREQUENCY SEPARATION

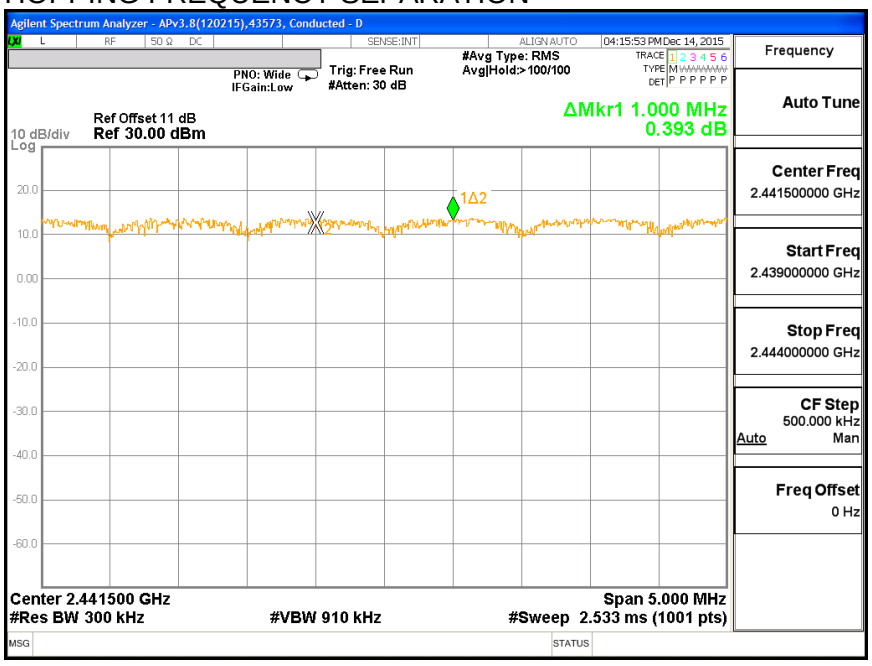

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

7.4.3. NUMBER OF HOPPING CHANNELS

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-247 (5.1) (4)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.

RESULTS

Normal Mode: 79 Channels observed.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

NUMBER OF HOPPING CHANNELS

NUMBER OF HOPPING CHANNELS (100 MHZ SPAN)

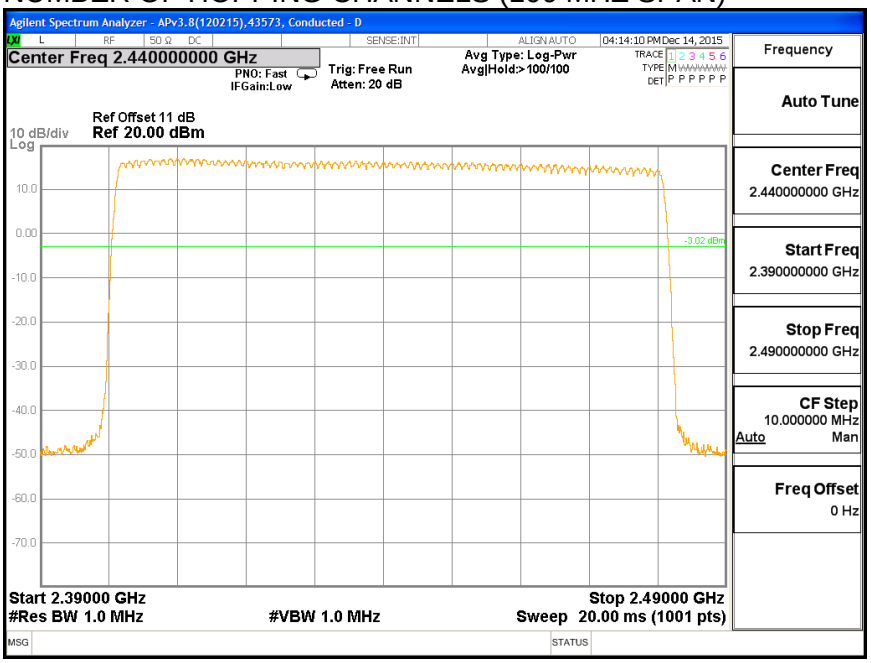

NUMBER OF HOPPING CHANNELS (30 MHZ SPAN, FIRST SEGMENT)

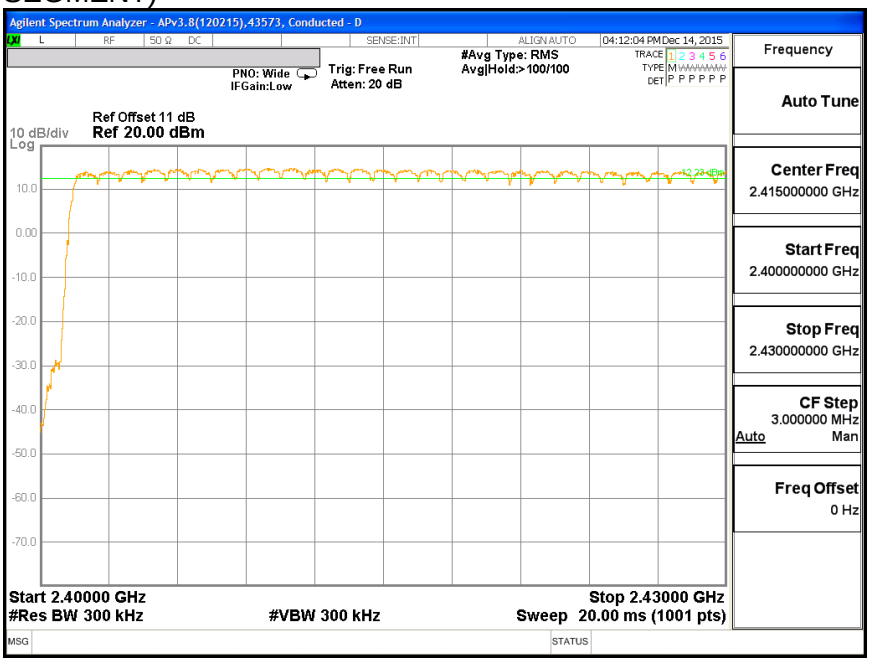

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

NUMBER OF HOPPING CHANNELS (30 MHZ SPAN, SECOND SEGMENT)

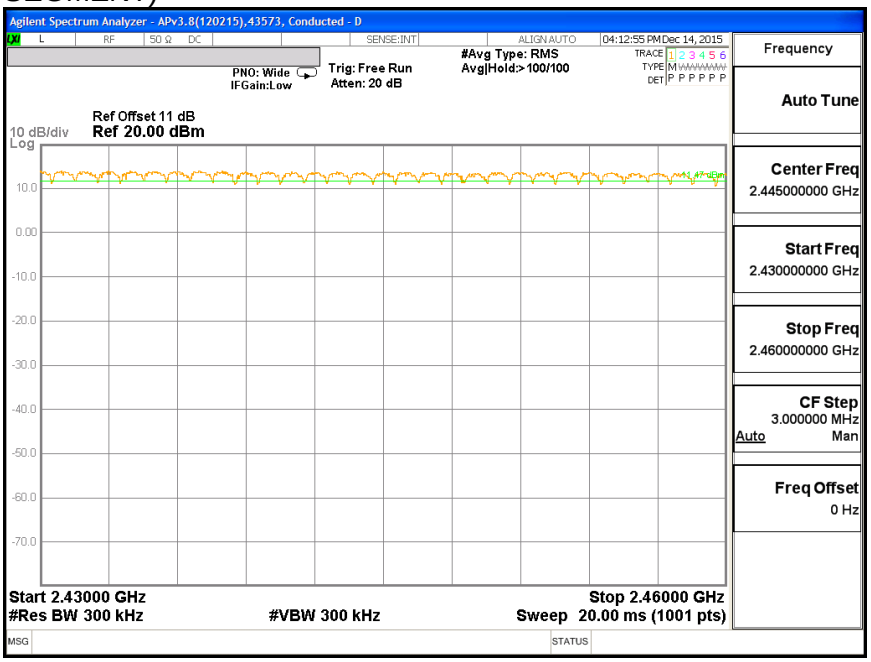

NUMBER OF HOPPING CHANNELS (30 MHZ SPAN, THIRD SEGMENT)

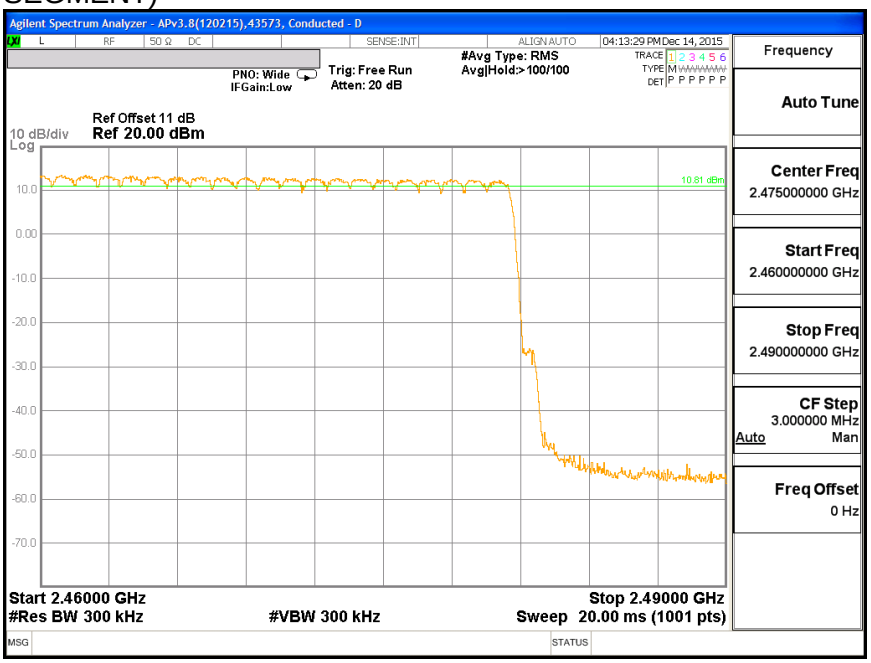

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

7.4.4. AVERAGE TIME OF OCCUPANCY

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-247 (5.1) (4)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.

The average time of occupancy in the specified 31.6 second period (79 channels * 0.4 s) is equal to 10 * (# of pulses in 3.16 s) * pulse width.

RESULTS

8PSK (EDR) Mode

DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of (sec)	Limit (sec)	Margin (sec)
3DH1	0.392	33	0.129	0.4	-0.271
3DH3	1.644	19	0.312	0.4	-0.088
3DH5	2.892	13	0.376	0.4	-0.024

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701I
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

PULSE WIDTH - 3DH1

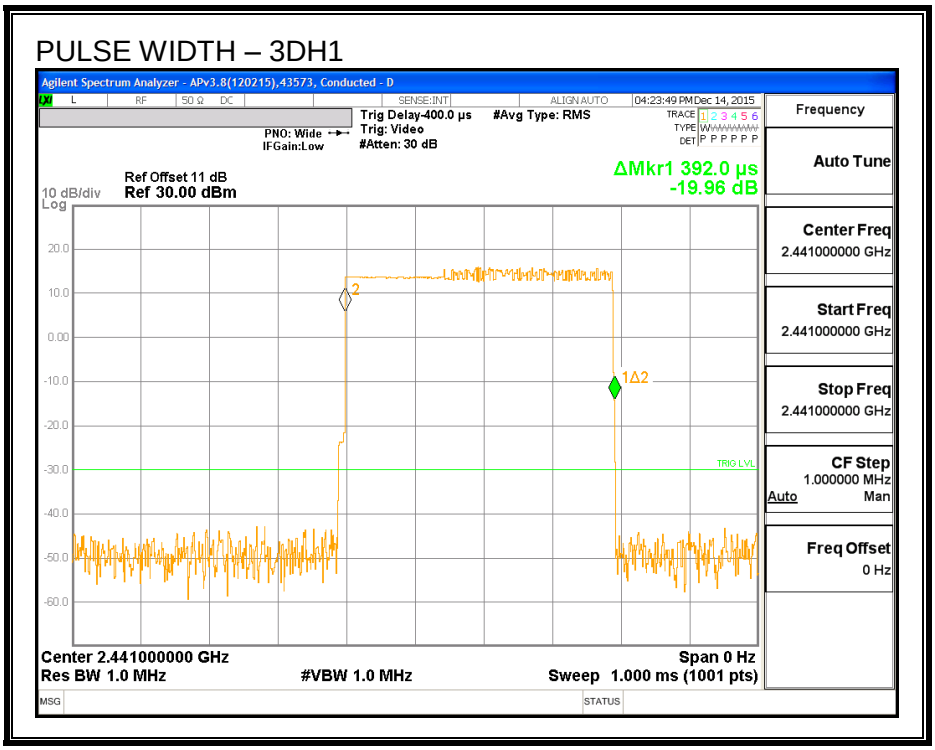

NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – 3DH1

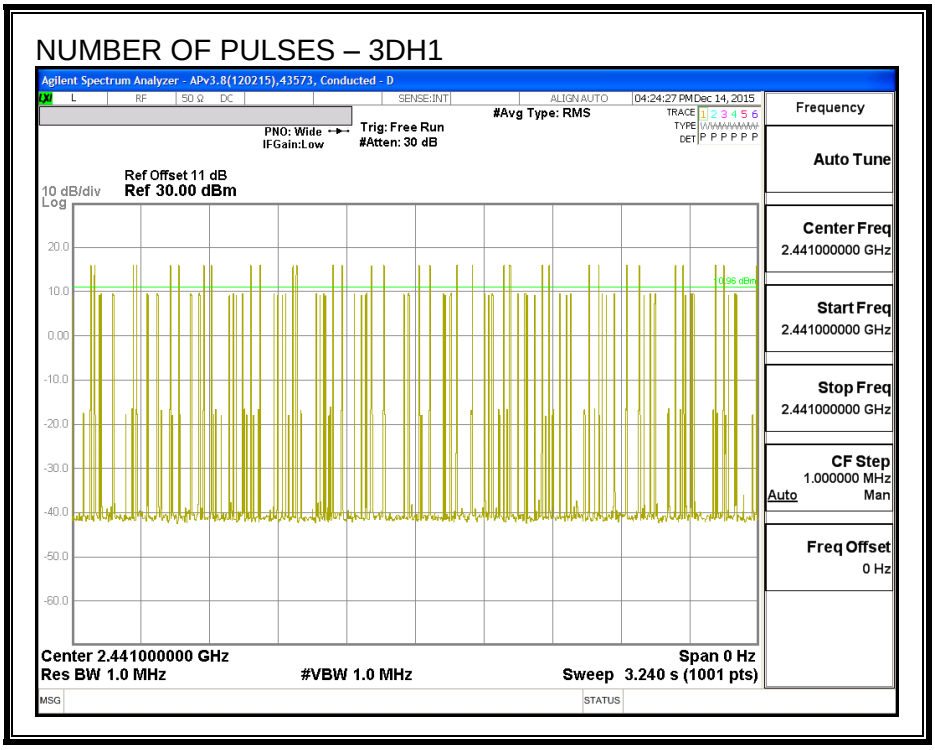

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

PULSE WIDTH – 3DH3

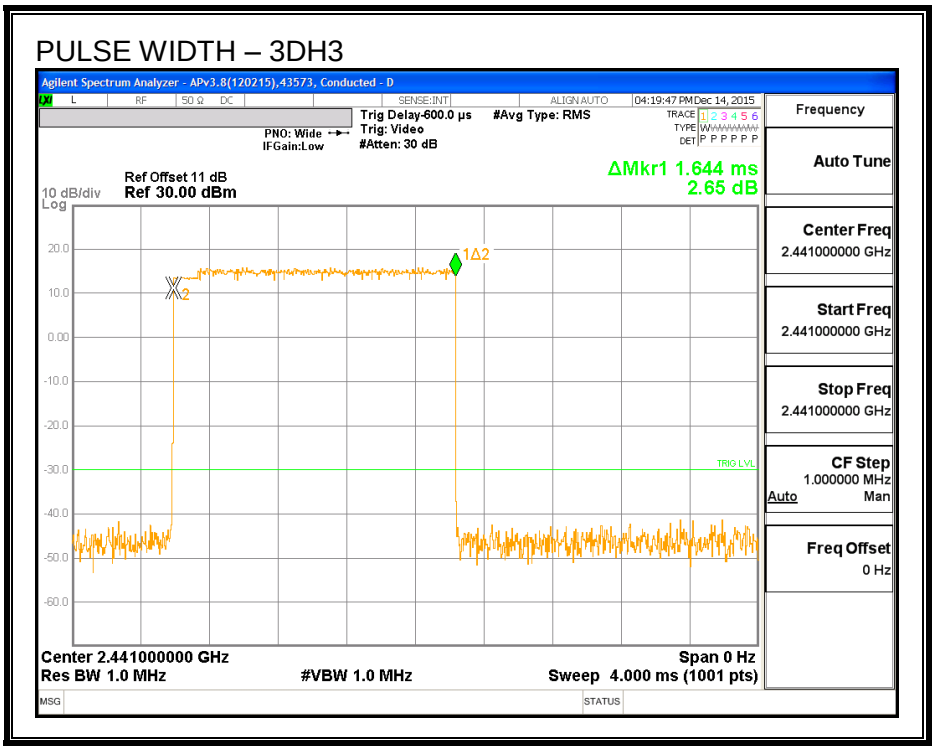

NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – 3DH3

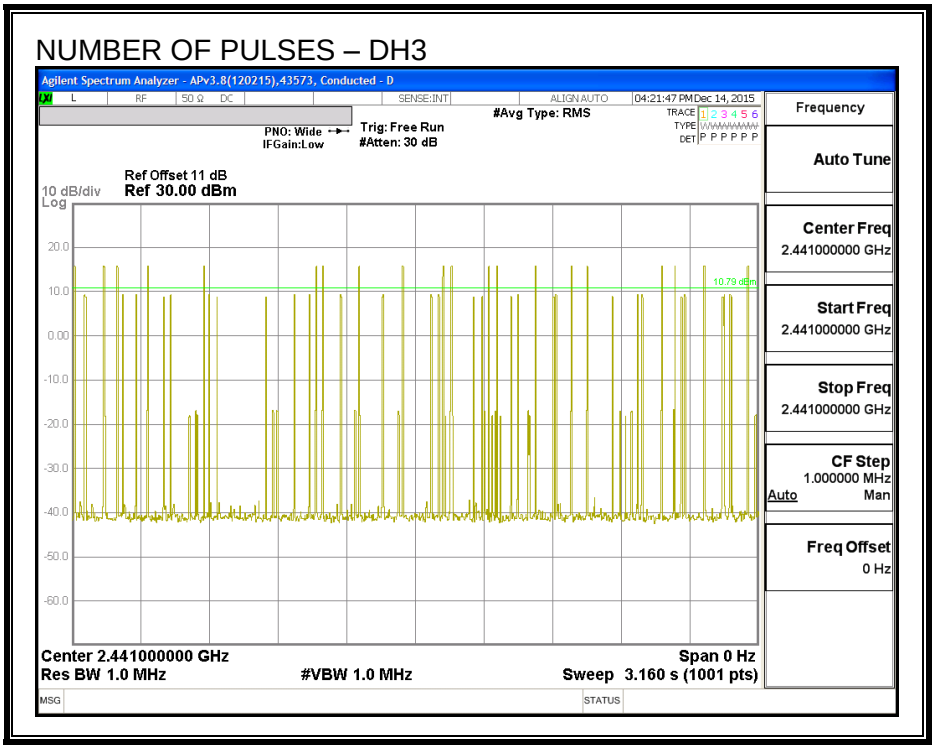

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

PULSE WIDTH – 3DH5

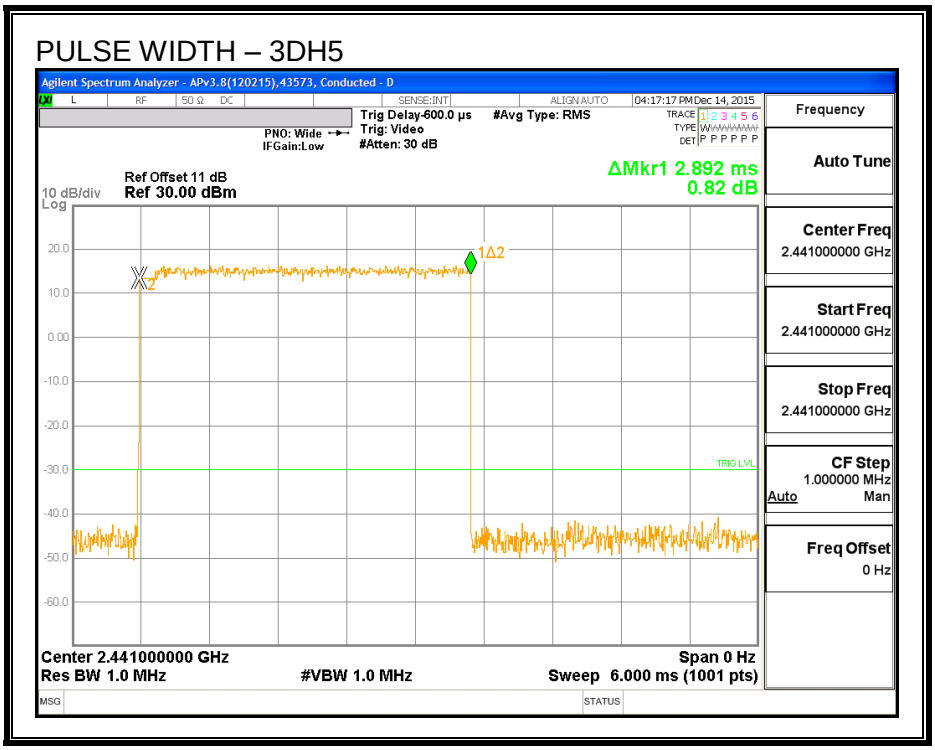

NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – 3DH5

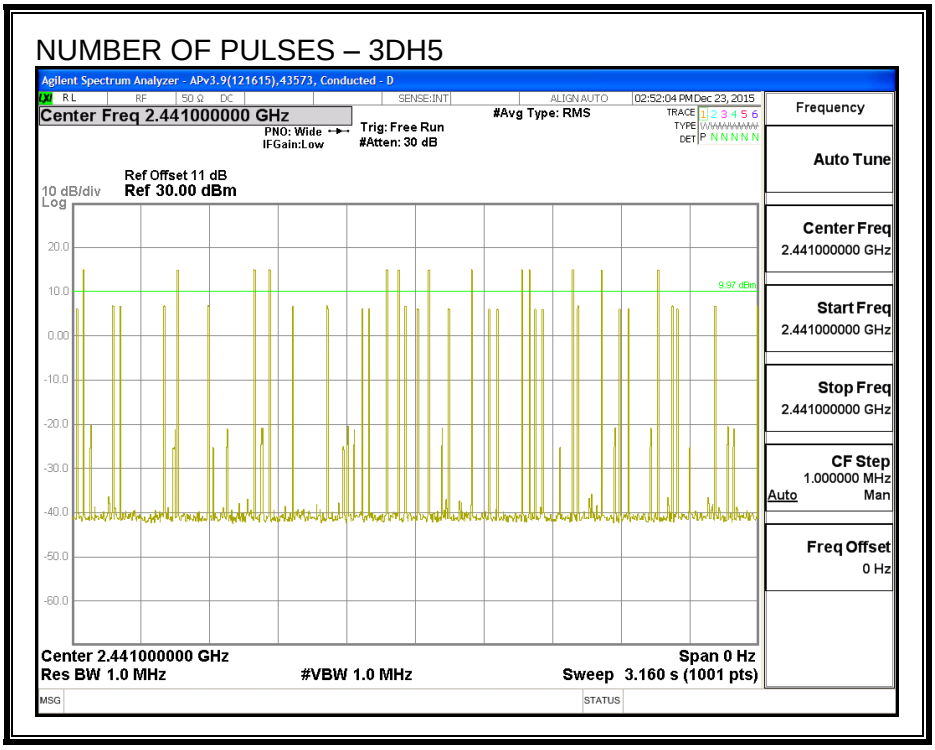

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

7.4.5. OUTPUT POWER

LIMIT

§15.247 (b) (1)

RSS-247 (5.4) (2)

The maximum antenna gain is less than 6 dBi, therefore the limit is 30 dBm.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE

The transmitter output is connected to a wideband peak and average power meter.

RESULTS

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	14.28	21	-6.69
Middle	2441	14.52	21	-6.45
High	2480	14.50	21	-6.47

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

7.4.6. AVERAGE POWER

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 11 dB (including 10 dB pad and 1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	11.23
Middle	2441	11.50
High	2480	11.26

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

7.4.7. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-247 (5.5)

Limit = -20 dBc

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.

RESULTS

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

SPURIOUS EMISSIONS, LOW CHANNEL

LOW CHANNEL BANDEDGE

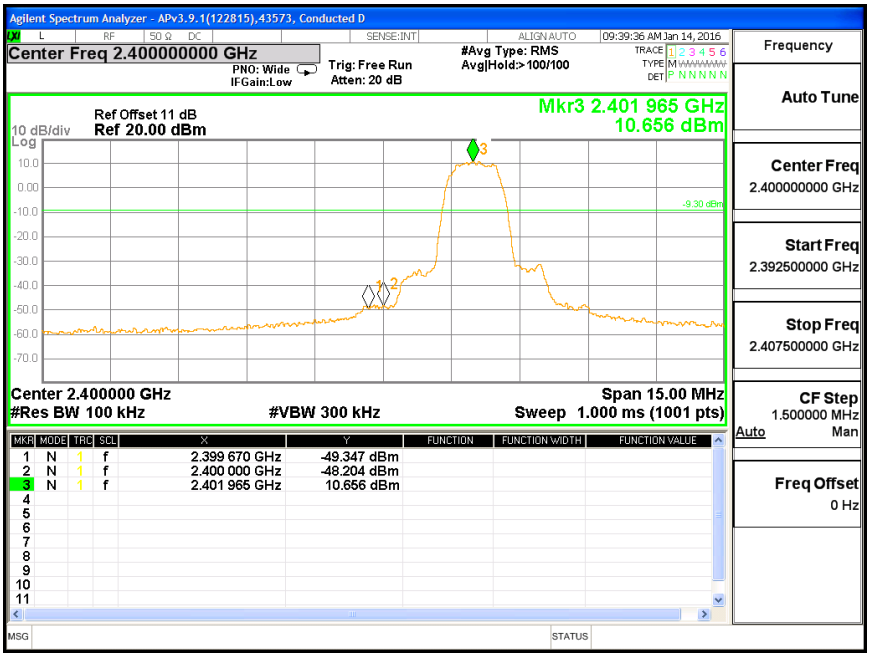

LOW CHANNEL SPURIOUS

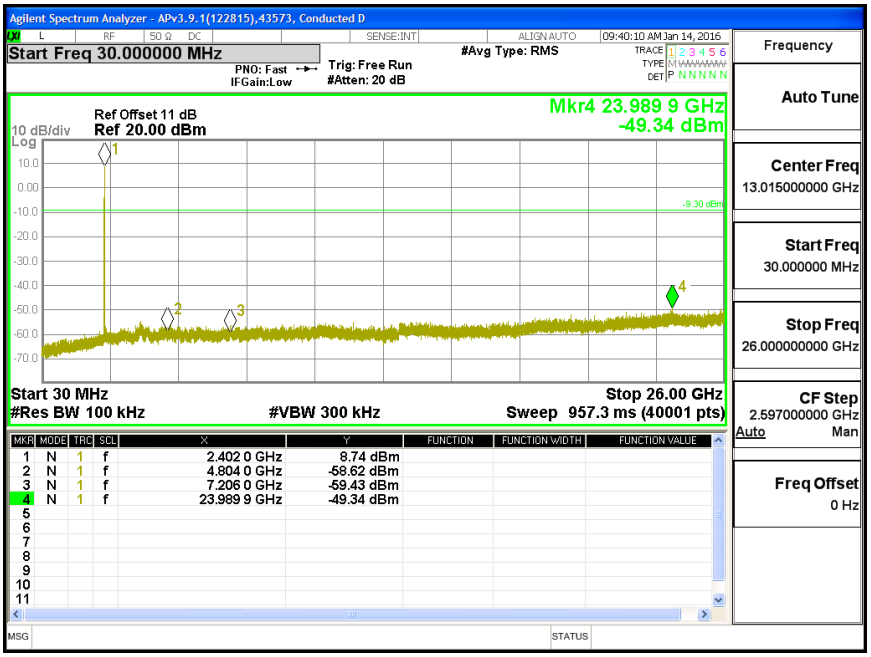

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

SPURIOUS EMISSIONS, MID CHANNEL

MID CHANNEL

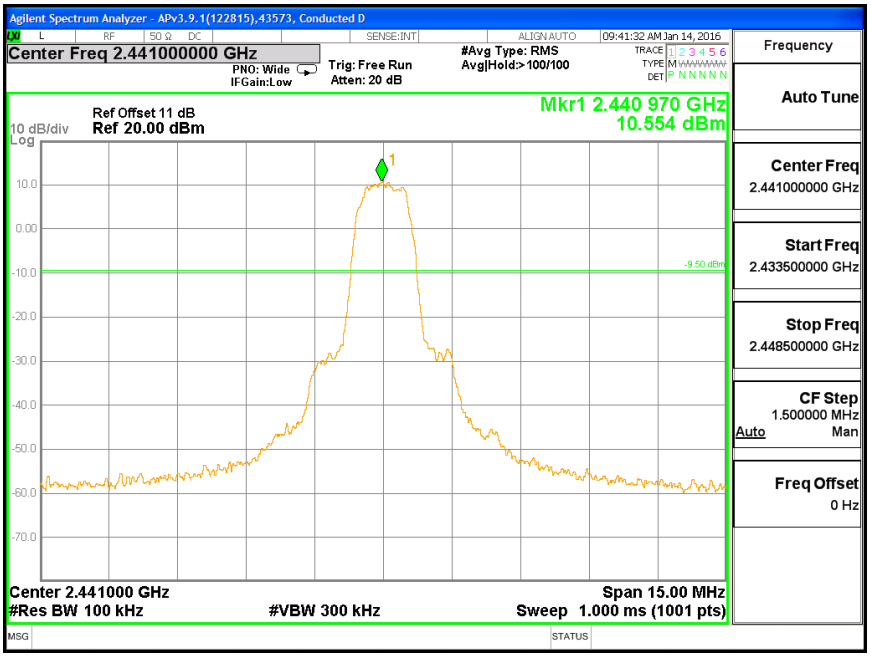

MID CHANNEL SPURIOUS

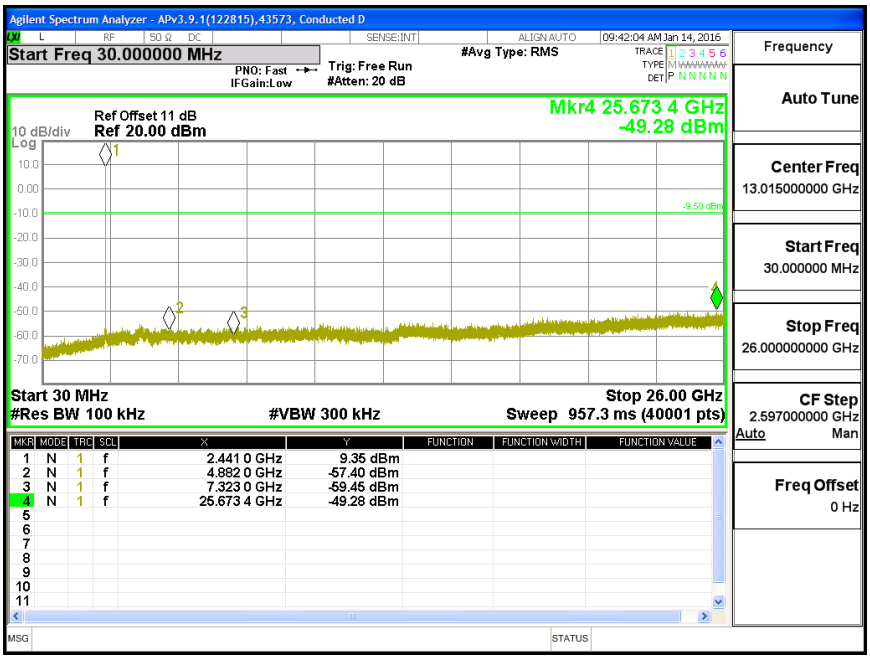

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

SPURIOUS EMISSIONS, HIGH CHANNEL

HIGH CHANNEL BANDEDGE

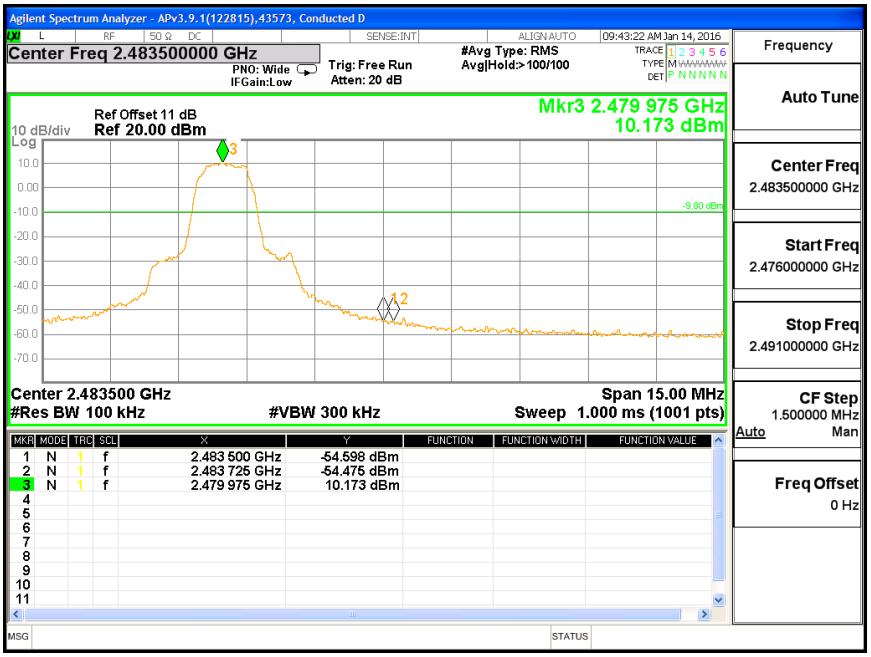

HIGH CHANNEL SPURIOUS

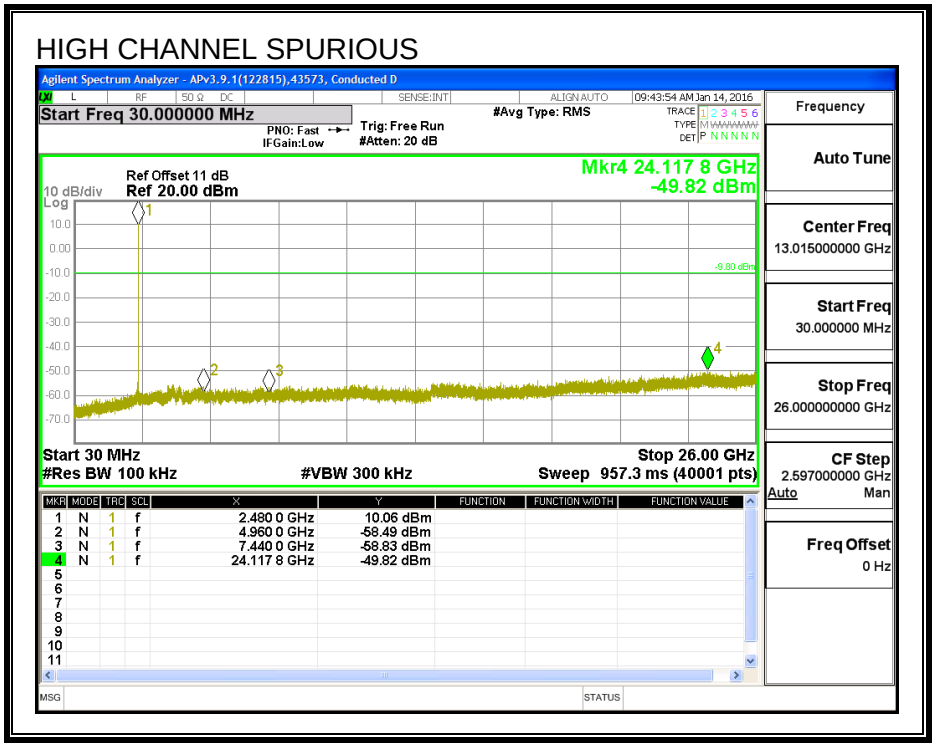

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

LOW BANDEDGE WITH HOPPING ON

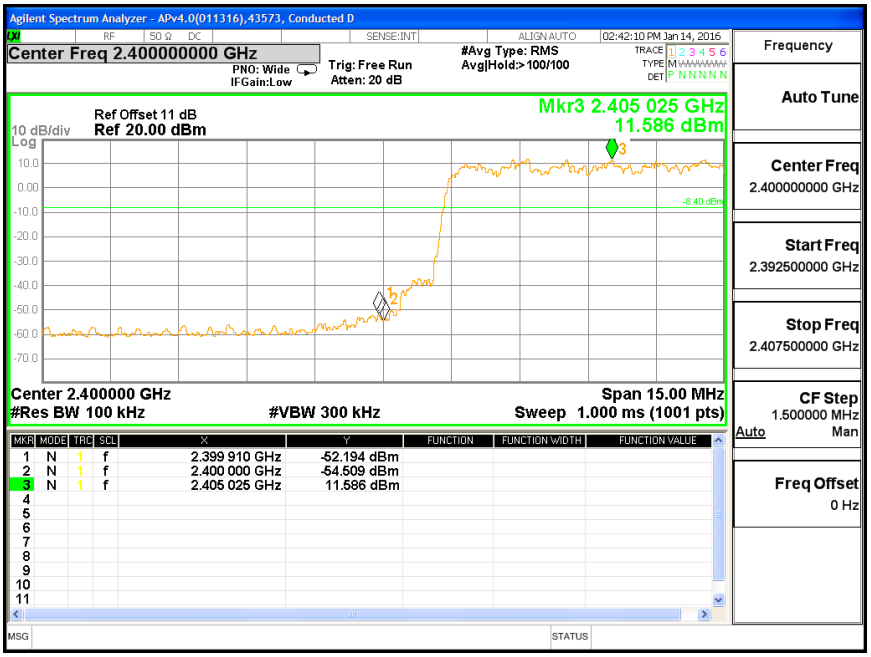

HIGH BANDEDGE WITH HOPPING ON

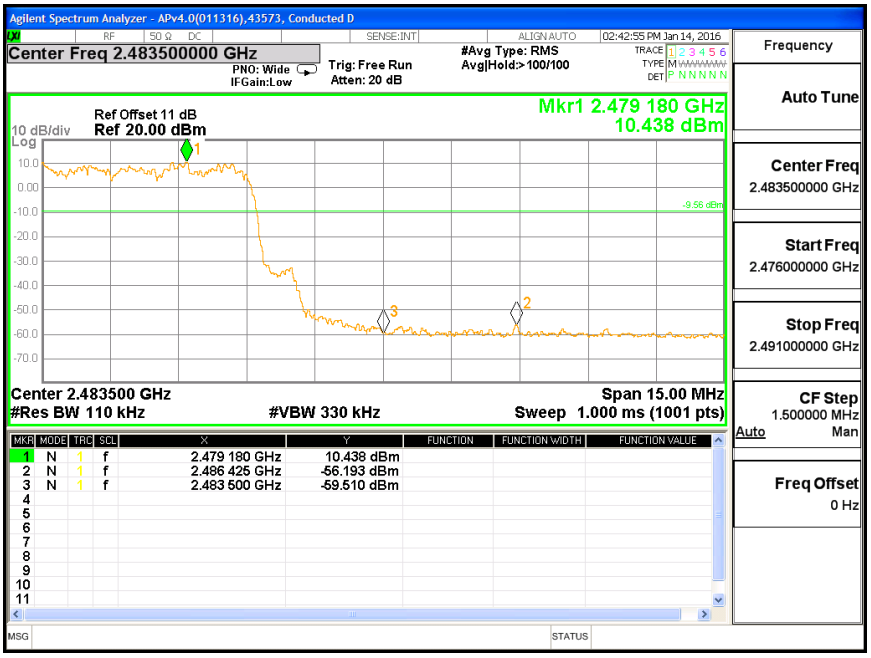

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

7.5. ANTENNA B LOW POWER BASIC DATA RATE GFSK MODULATION

7.5.1. 20 dB AND 99% BANDWIDTH

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to ≥ 1% of the 20 dB bandwidth. The VBW is set to ≥ RBW. The sweep time is coupled.

RESULTS

Channel	Frequency (MHz)	20 dB Bandwidth (KHz)	99% Bandwidth (KHz)
Low	2402	920.8	890.13
Middle	2441	920.1	880.46
High	2480	873.3	885.89

20 dB AND 99% BANDWIDTH

BANDWIDTH LOW CH

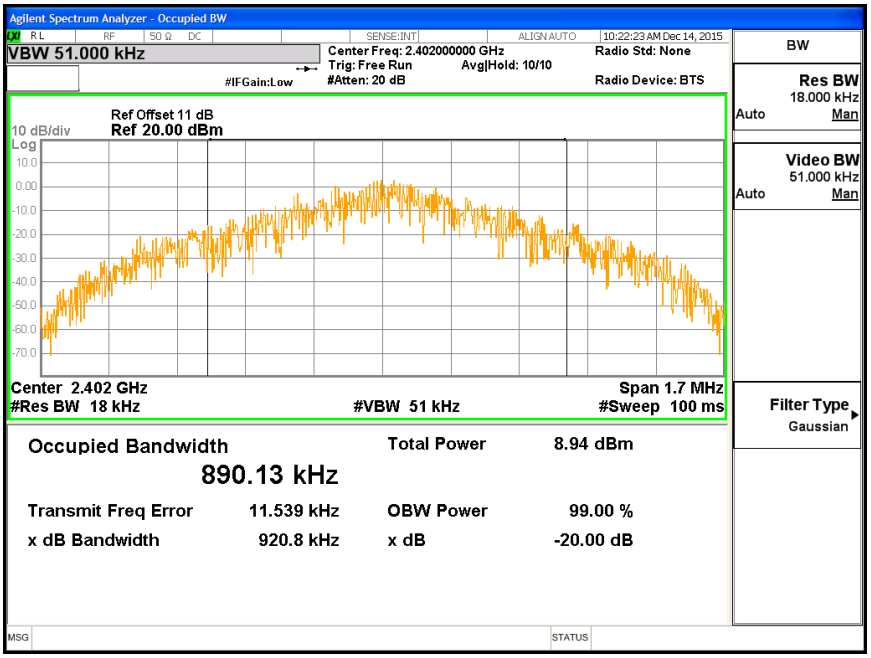

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

BANDWIDTH MID CH

BANDWIDTH HIGH CH

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

7.5.2. HOPPING FREQUENCY SEPARATION

LIMIT

FCC §15.247 (a) (1)

IC RSS-247 (5.1) (2)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hoping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 300 kHz and the VBW is set to 910 kHz. The sweep time is coupled.

RESULTS

HOPPING FREQUENCY SEPARATION

HOPPING FREQUENCY SEPARATION

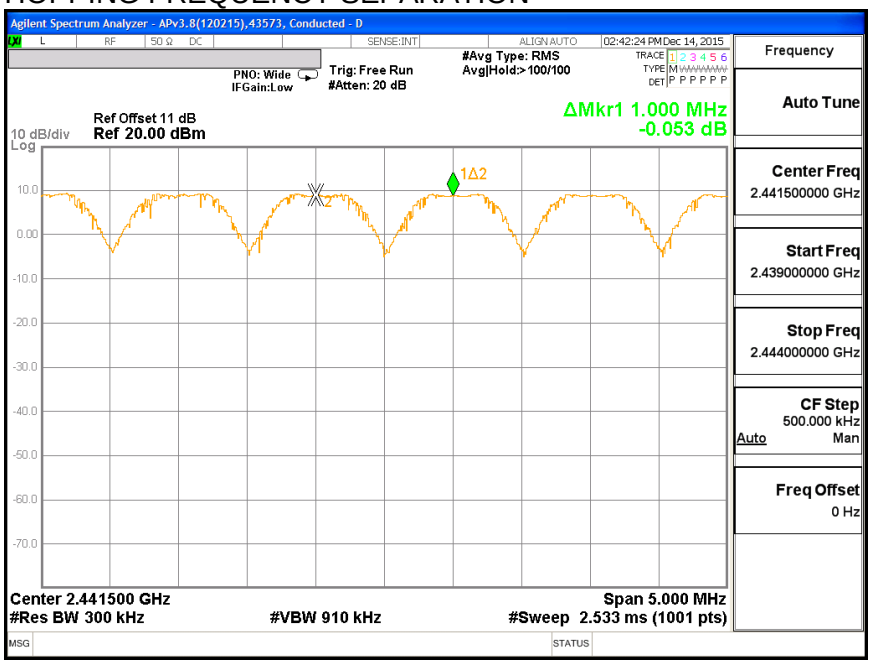

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

7.5.3. NUMBER OF HOPPING CHANNELS

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-247 (5.1) (4)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.

RESULTS

Normal Mode: 79 Channels observed.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

NUMBER OF HOPPING CHANNELS

NUMBER OF HOPPING CHANNELS (100 MHZ SPAN)

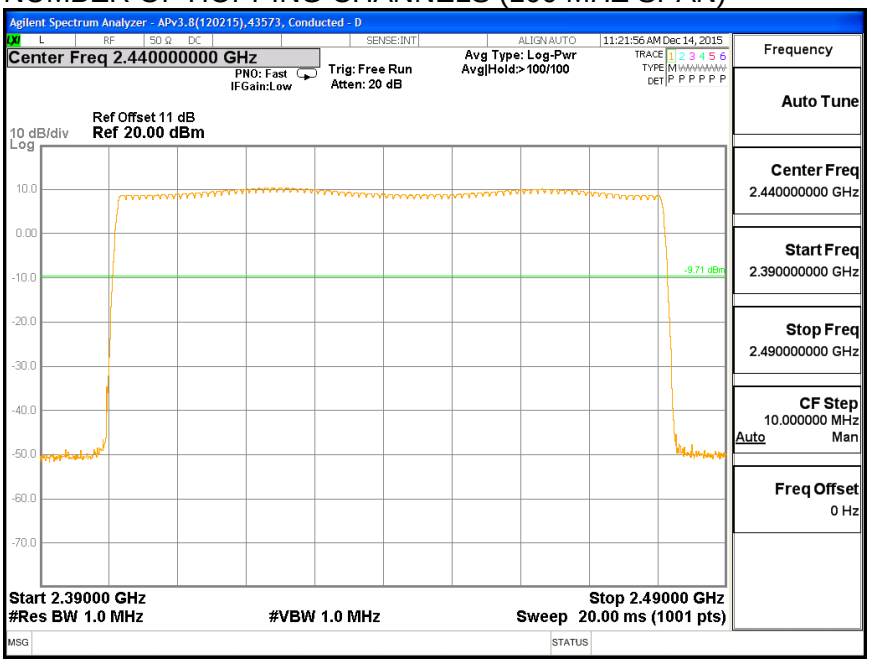

NUMBER OF HOPPING CHANNELS (30 MHZ SPAN, FIRST SEGMENT)

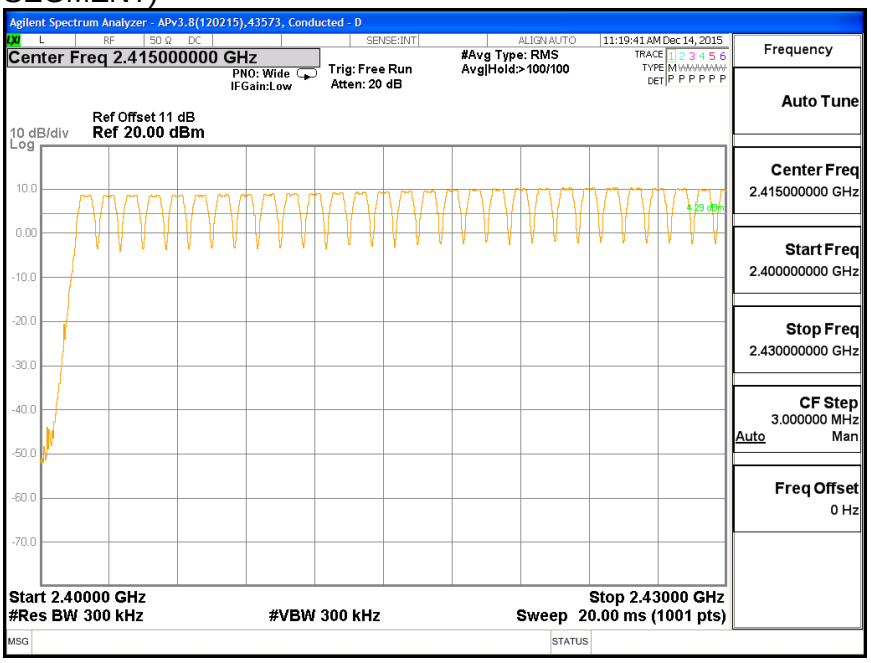

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

NUMBER OF HOPPING CHANNELS (30 MHZ SPAN, SECOND SEGMENT)

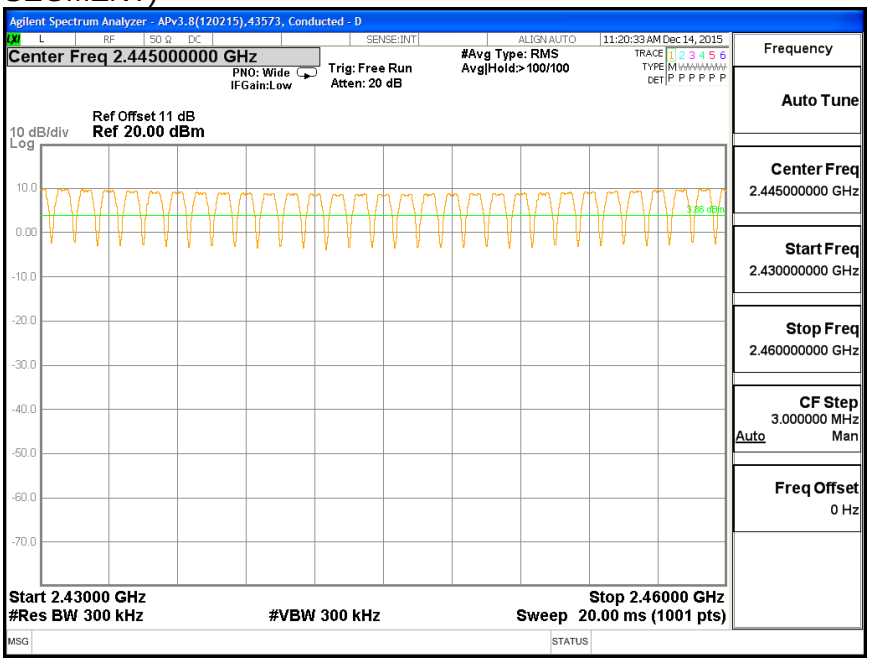

NUMBER OF HOPPING CHANNELS (30 MHZ SPAN, THIRD SEGMENT)

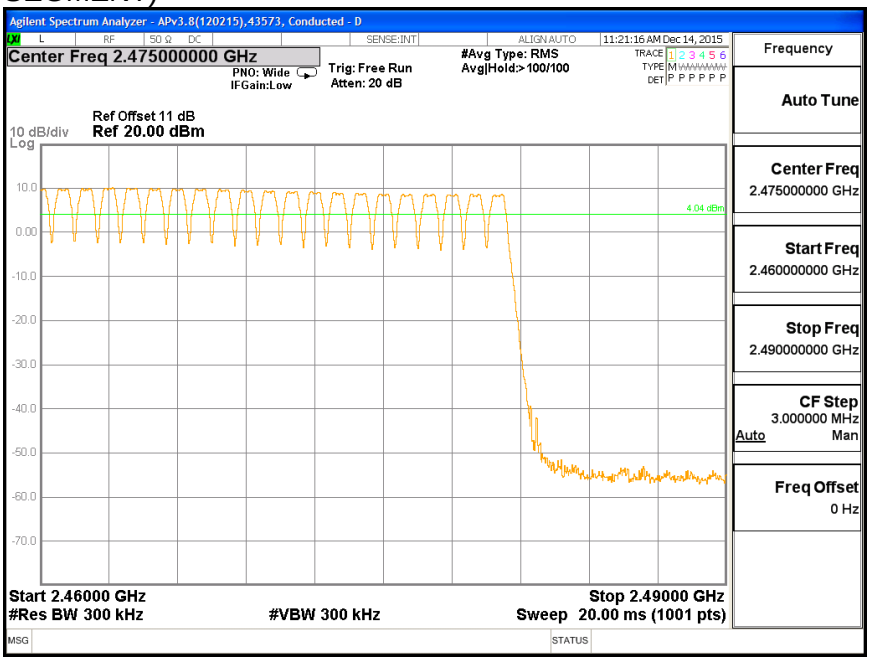

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

7.5.4. AVERAGE TIME OF OCCUPANCY

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-247 (5.1) (4)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.

The average time of occupancy in the specified 31.6 second period (79 channels * 0.4 s) is equal to 10 * (# of pulses in 3.16 s) * pulse width.

For AFH mode, the average time of occupancy in the specified 8 second period (20 channels * 0.4 seconds) is equal to 10 * (# of pulses in 0.8 s) * pulse width.

RESULTS

DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK Normal Mode					
DH1	0.385	33	0.127	0.4	-0.273
DH3	1.640	19	0.312	0.4	-0.088
DH5	2.892	12	0.347	0.4	-0.053

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

PULSE WIDTH - DH1

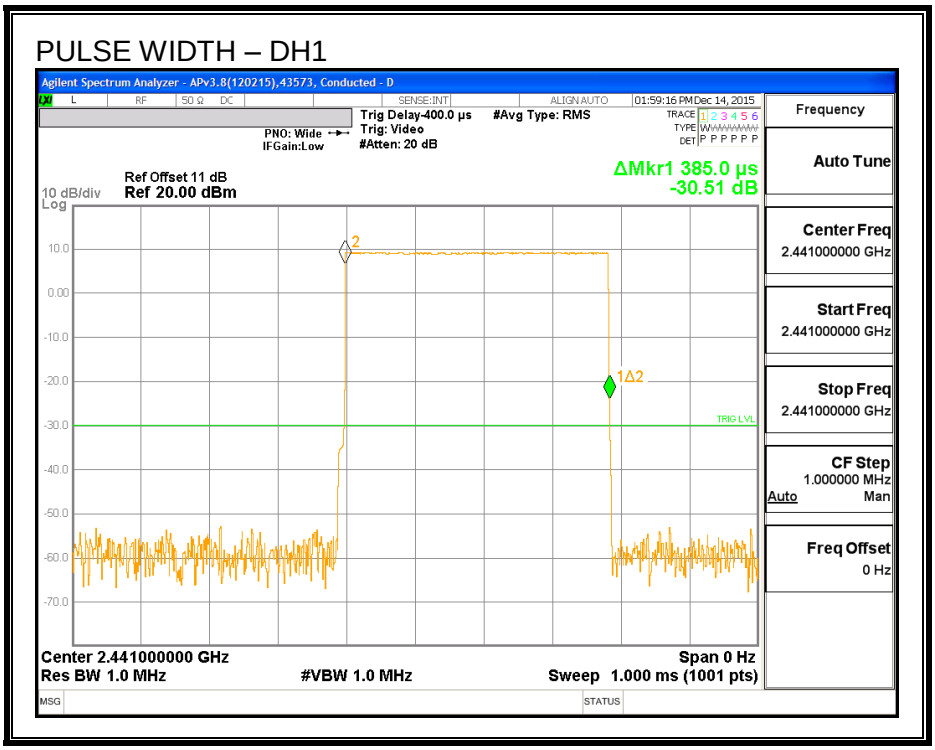

NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH1

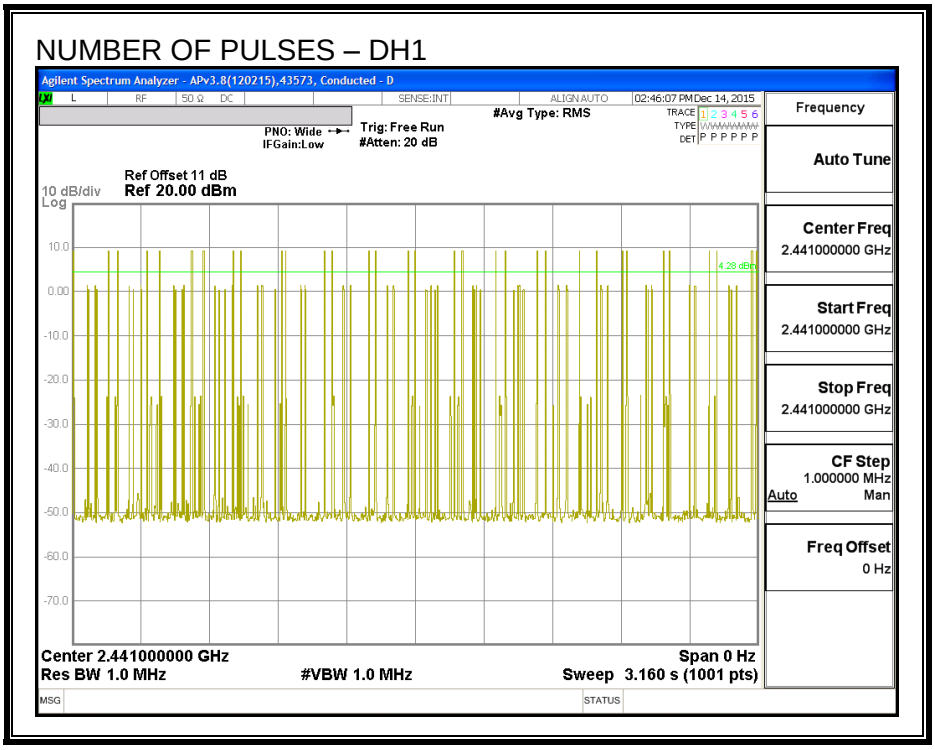

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

PULSE WIDTH – DH3

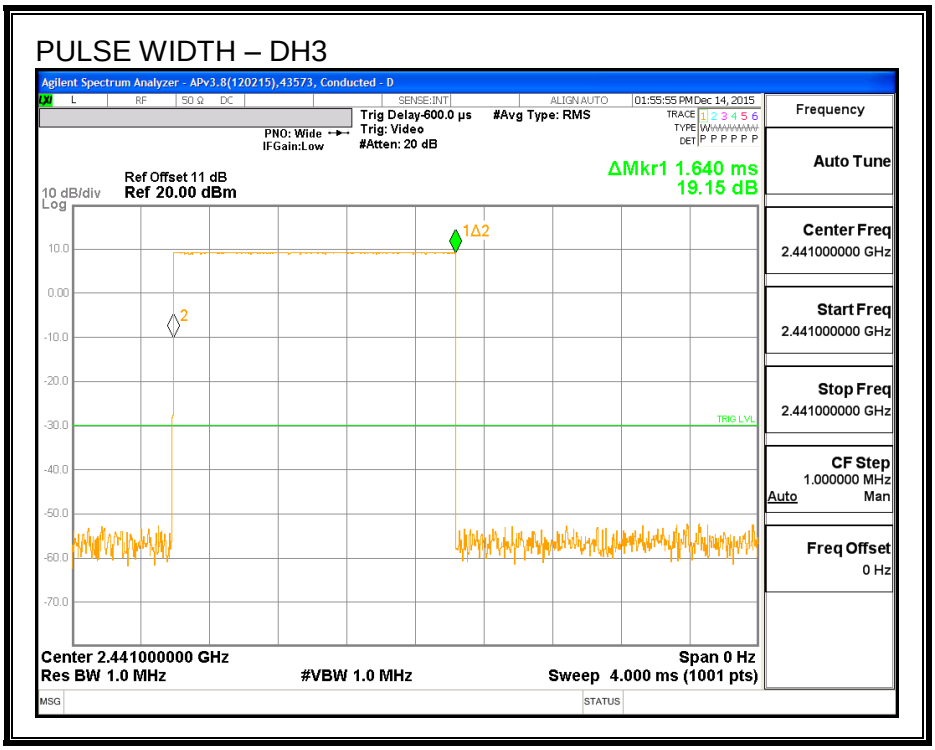

NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH3

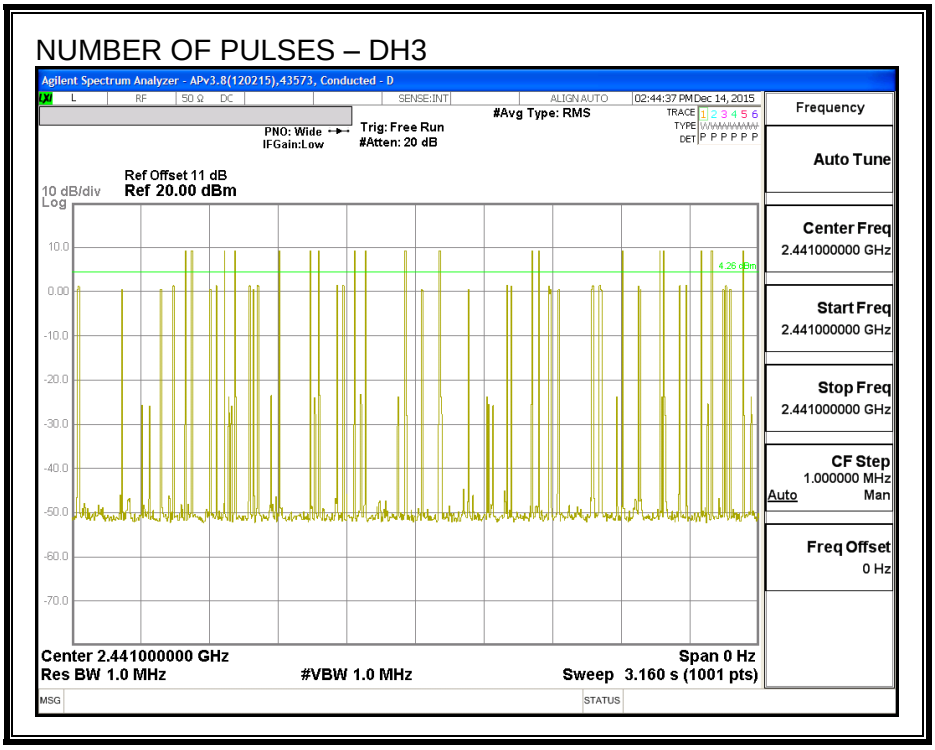

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

PULSE WIDTH – DH5

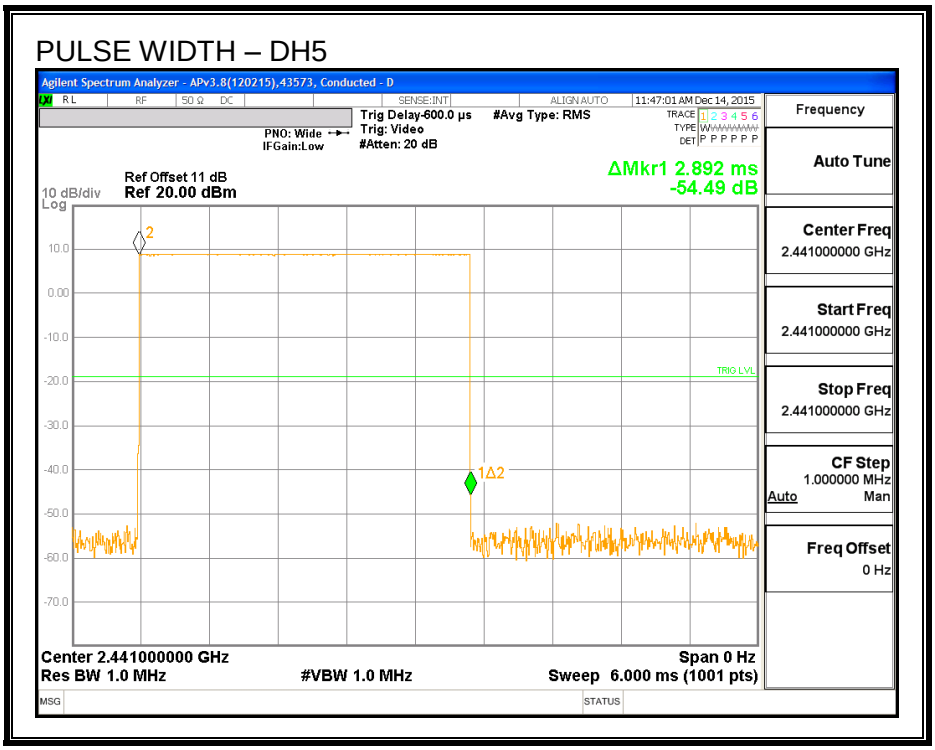

NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH5

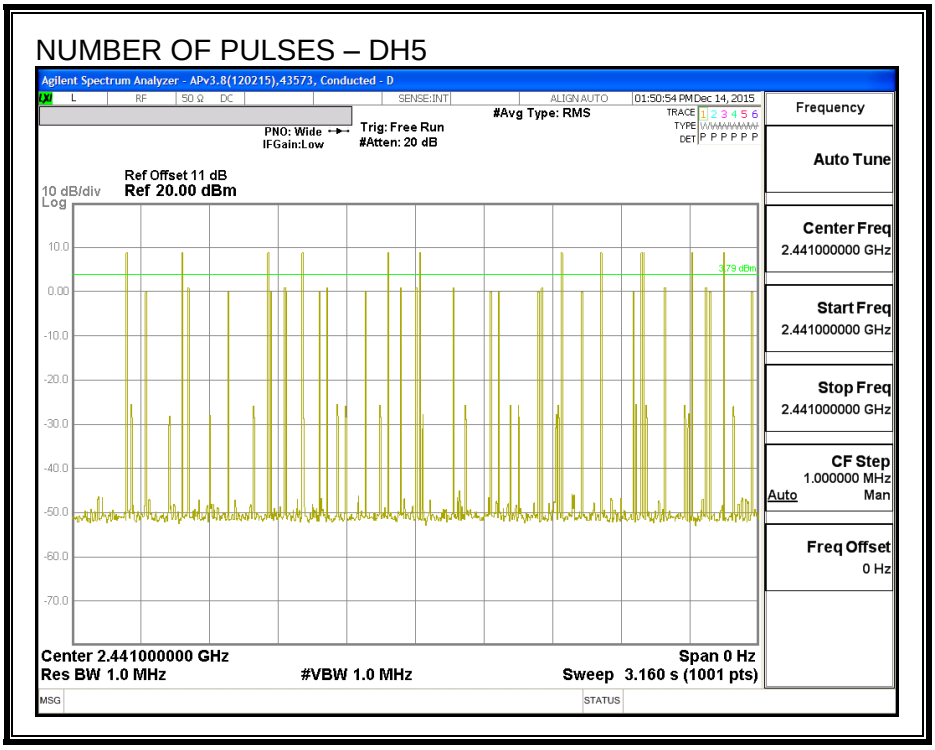

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

7.5.5. OUTPUT POWER

LIMIT

§15.247 (b) (1)

RSS-247 (5.4) (2)

The maximum antenna gain is less than 6 dBi, therefore the limit is 30 dBm.

TEST PROCEDURE

The transmitter output is connected to a wideband peak and average power meter.

RESULTS

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	9.60	30	-20.40
Middle	2441	9.05	30	-20.95
High	2480	8.58	30	-21.42

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

7.5.6. AVERAGE POWER

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 11 dB (including 10 dB pad and 1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	9.49
Middle	2441	8.96
High	2480	8.47

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

7.5.7. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-247 (5.5)

Limit = -20 dBc

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.

RESULTS

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

SPURIOUS EMISSIONS, LOW CHANNEL

LOW CHANNEL BANDEDGE

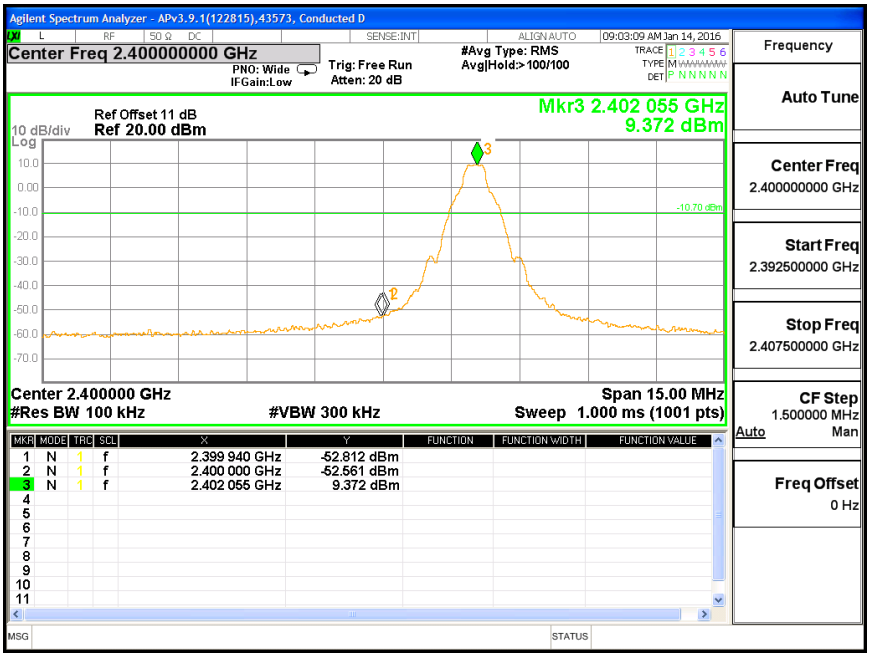

LOW CHANNEL SPURIOUS

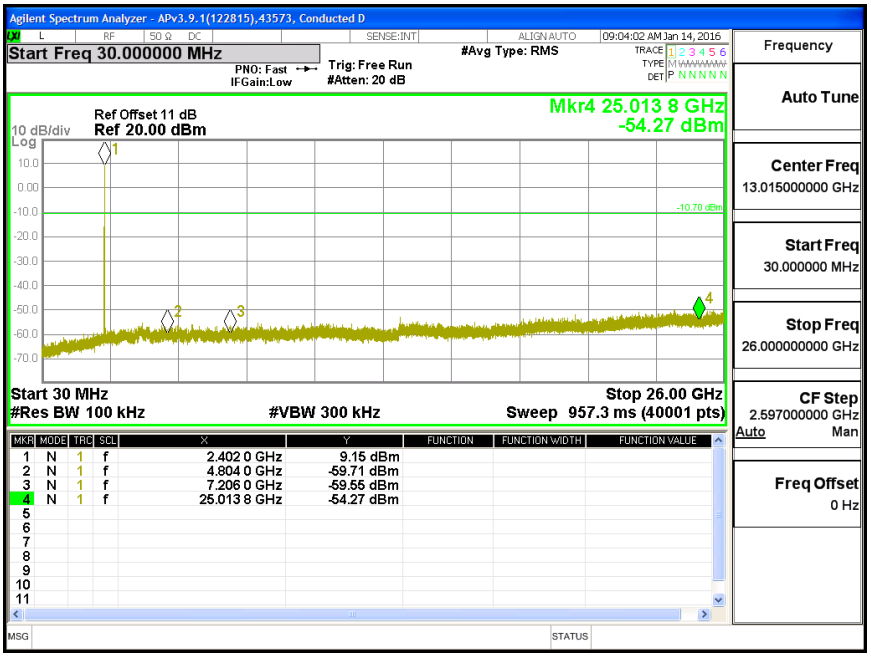

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

SPURIOUS EMISSIONS, MID CHANNEL

MID CHANNEL

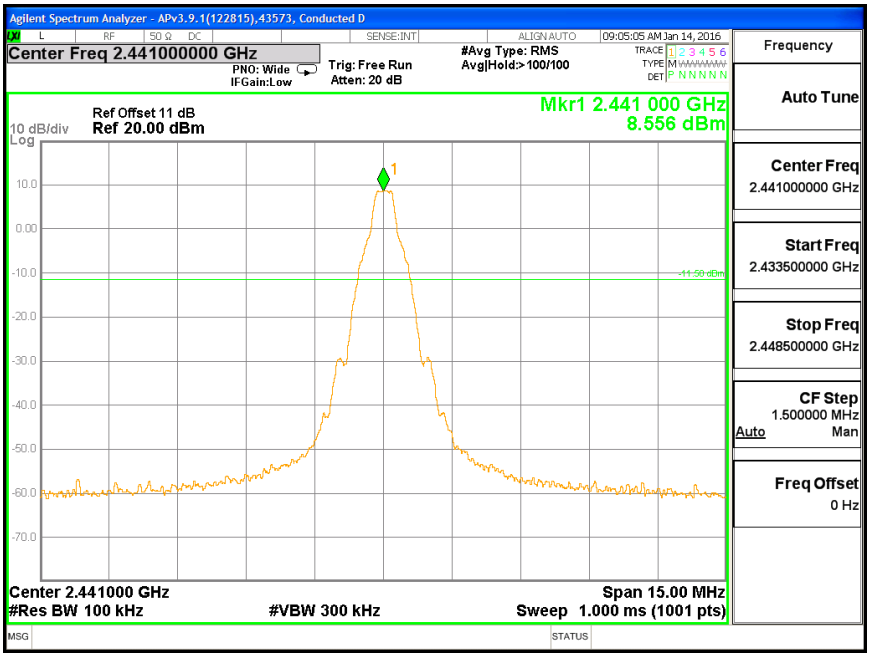

MID CHANNEL SPURIOUS

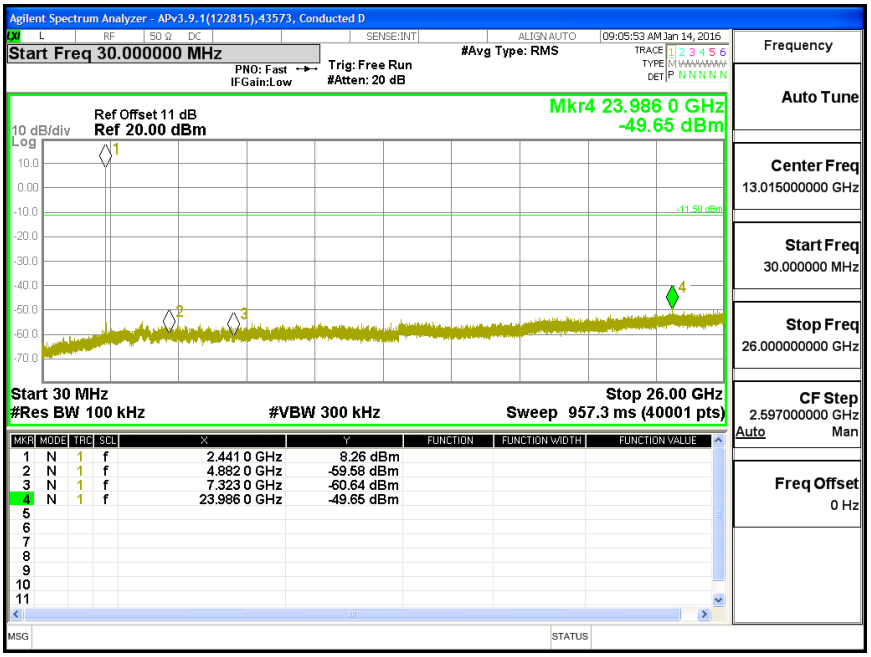

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

SPURIOUS EMISSIONS, HIGH CHANNEL

HIGH CHANNEL BANDEDGE

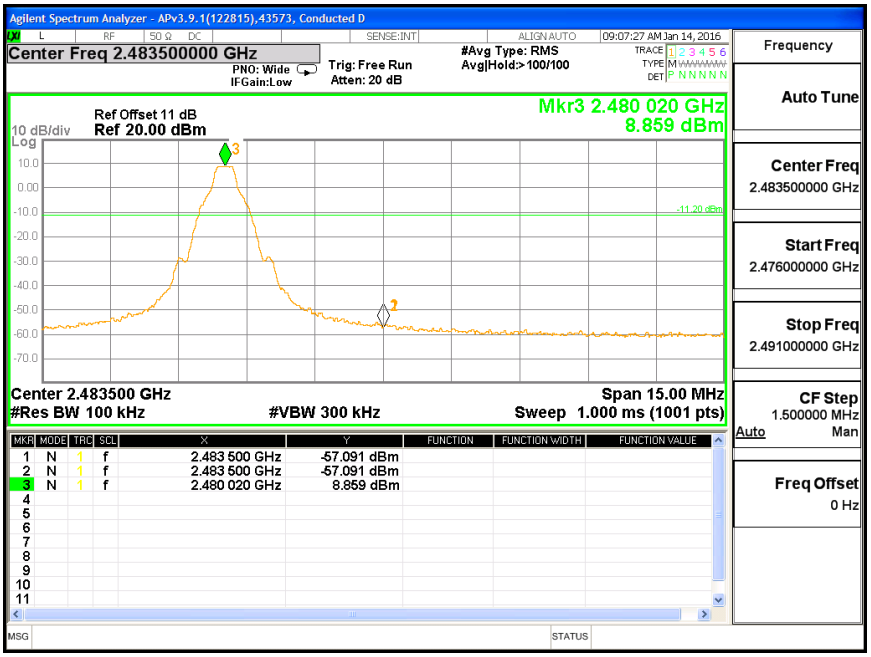

HIGH CHANNEL SPURIOUS

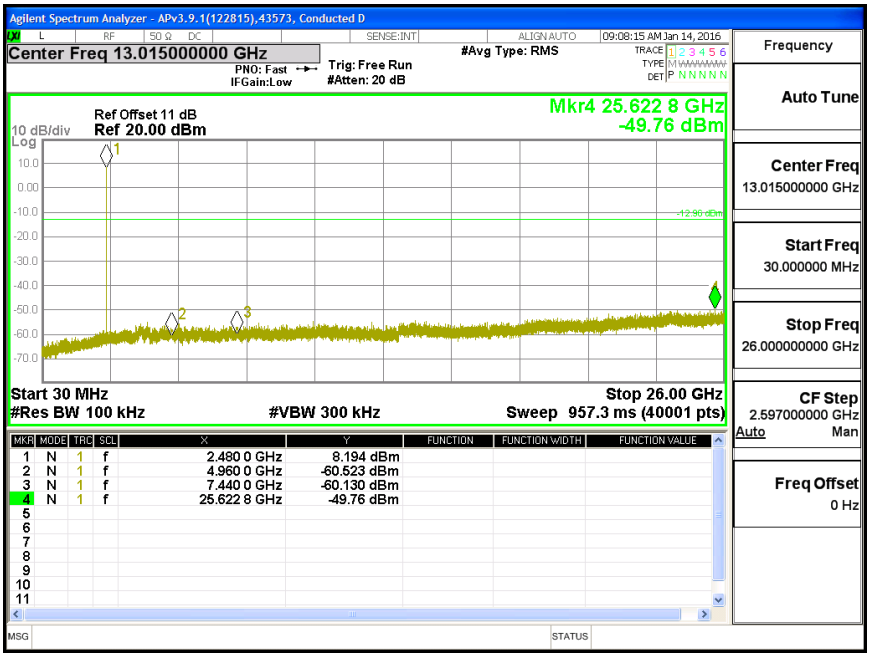

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

LOW BANDEDGE WITH HOPPING ON

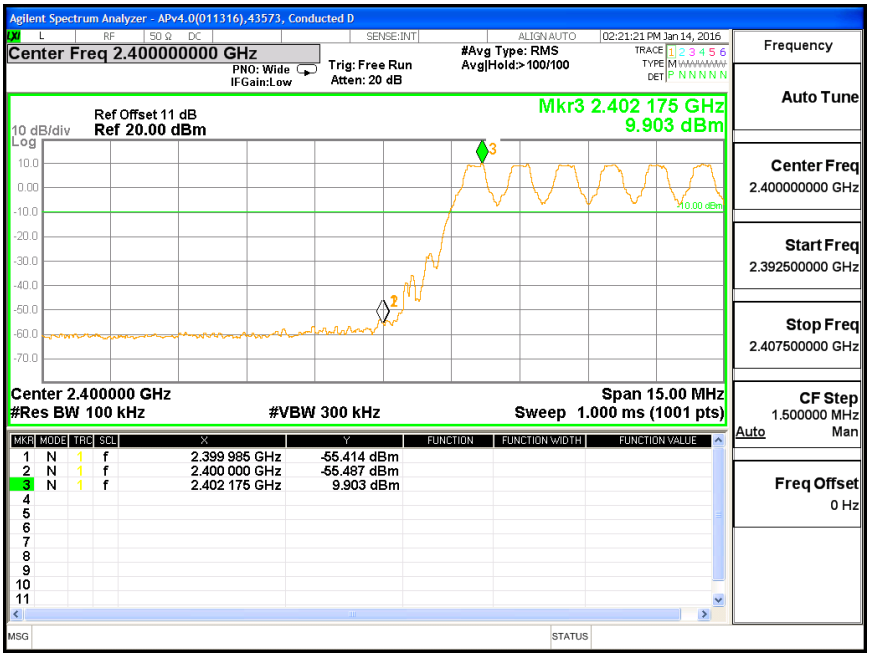

HIGH BANDEDGE WITH HOPPING ON

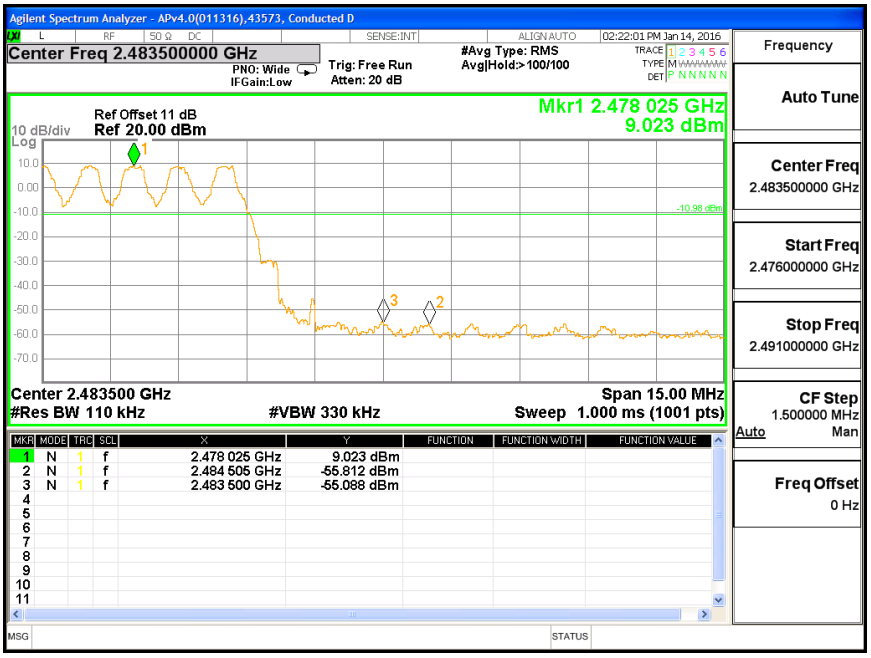

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

7.6. ANTENNA B LOW POWER ENHANCED DATA RATE QPSK MODULATION

7.6.1. OUTPUT POWER

LIMIT

§15.247 (b) (1)

RSS-247 (5.4) (2)

The maximum antenna gain is less than 6 dBi, therefore the limit is 30 dBm.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE

The transmitter output is connected to a wideband peak and average power meter.

RESULTS

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	8.05	21	-12.92
Middle	2441	7.99	21	-12.98
High	2480	7.62	21	-13.35

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

7.6.2. AVERAGE POWER

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 11 dB (including 10 dB pad and 1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	5.48
Middle	2441	5.46
High	2480	5.15

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

7.7. ANTENNA B LOW POWER ENHANCED DATA RATE 8PSK MODULATION

7.7.1. 20 dB AND 99% BANDWIDTH

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to ≥ 1% of the 20 dB bandwidth. The VBW is set to ≥ RBW. The sweep time is coupled.

RESULTS

Channel	Frequency (MHz)	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	2402	1.3690	1.2097
Middle	2441	1.3570	1.2335
High	2480	1.3280	1.2218

20 dB AND 99% BANDWIDTH

BANDWIDTH LOW CH

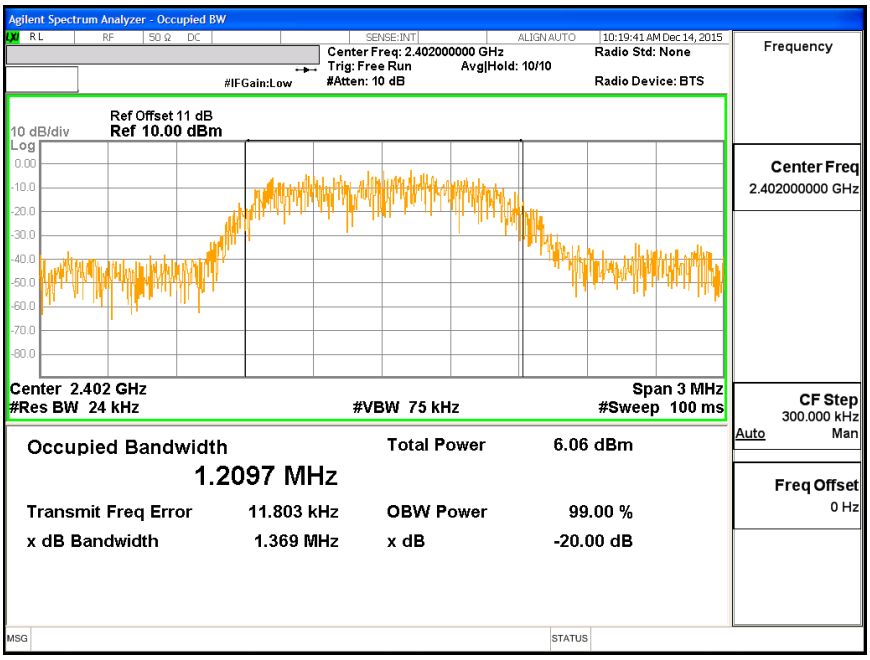

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

BANDWIDTH MID CH

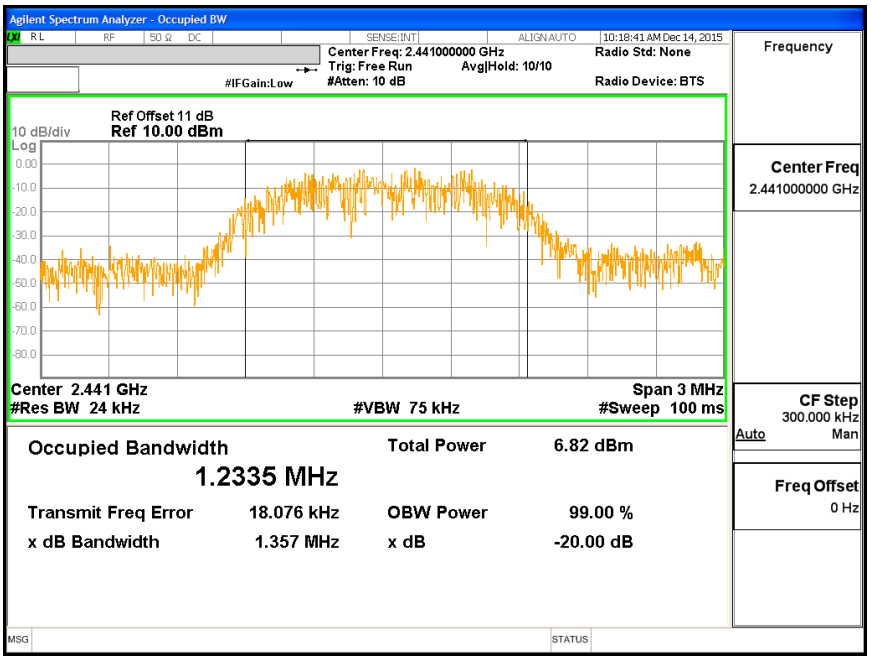

BANDWIDTH HIGH CH

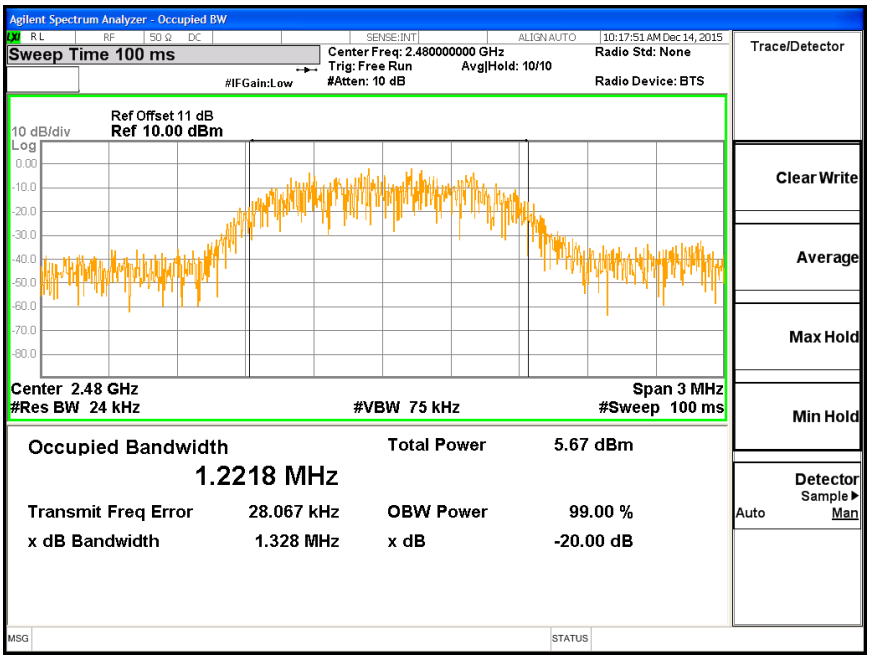

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

7.7.2. HOPPING FREQUENCY SEPARATION

LIMIT

FCC §15.247 (a) (1)

IC RSS-247 (5.1) (2)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hoping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 300 kHz and the VBW is set to 910 kHz. The sweep time is coupled.

RESULTS

HOPPING FREQUENCY SEPARATION

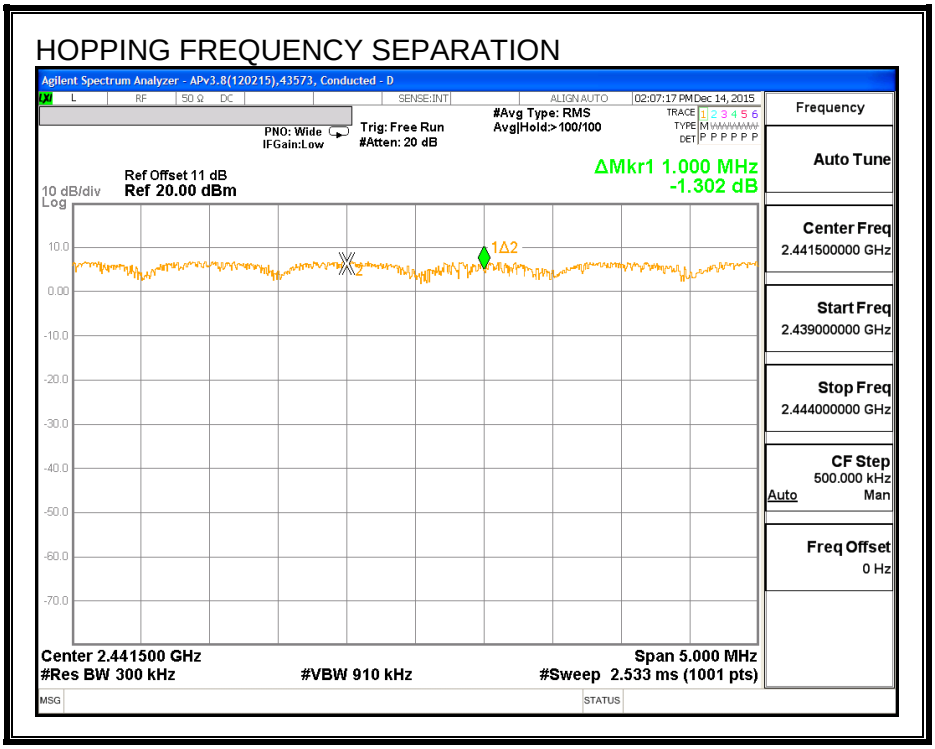

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

7.7.3. NUMBER OF HOPPING CHANNELS

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-247 (5.1) (4)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.

RESULTS

Normal Mode: 79 Channels observed.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

NUMBER OF HOPPING CHANNELS

NUMBER OF HOPPING CHANNELS (100 MHZ SPAN)

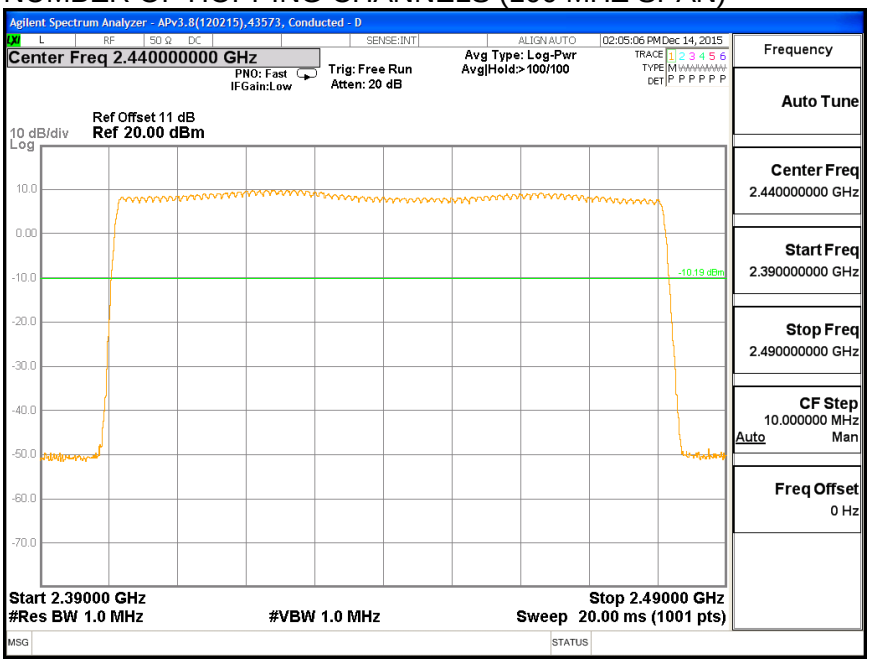

NUMBER OF HOPPING CHANNELS (30 MHZ SPAN, FIRST SEGMENT)

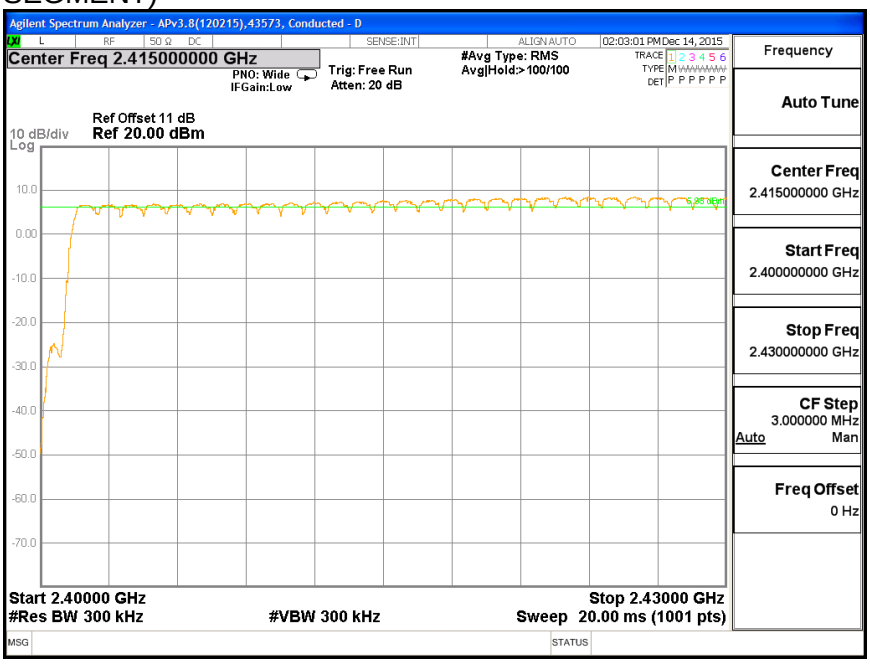

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

NUMBER OF HOPPING CHANNELS (30 MHZ SPAN, SECOND SEGMENT)

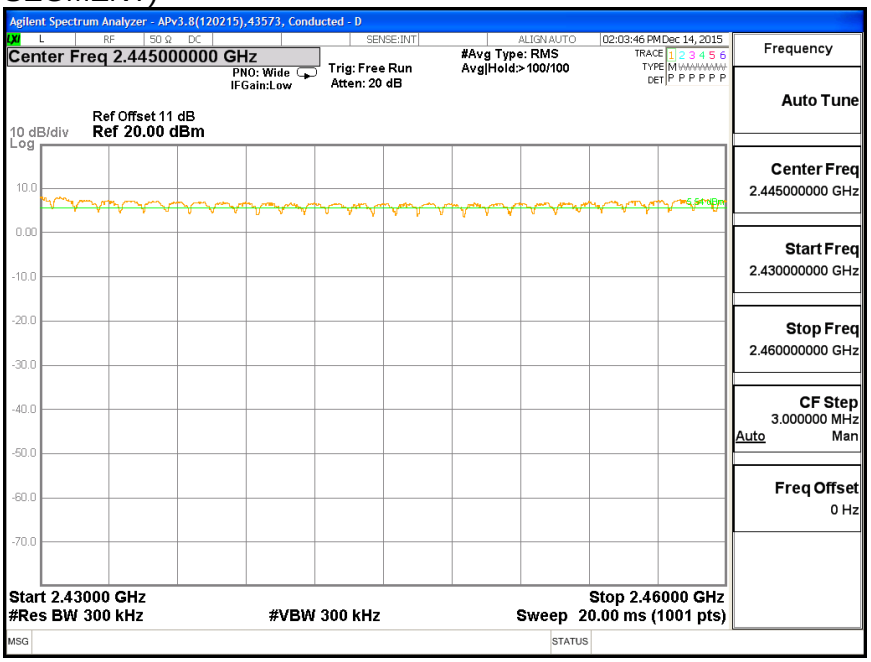

NUMBER OF HOPPING CHANNELS (30 MHZ SPAN, THIRD SEGMENT)

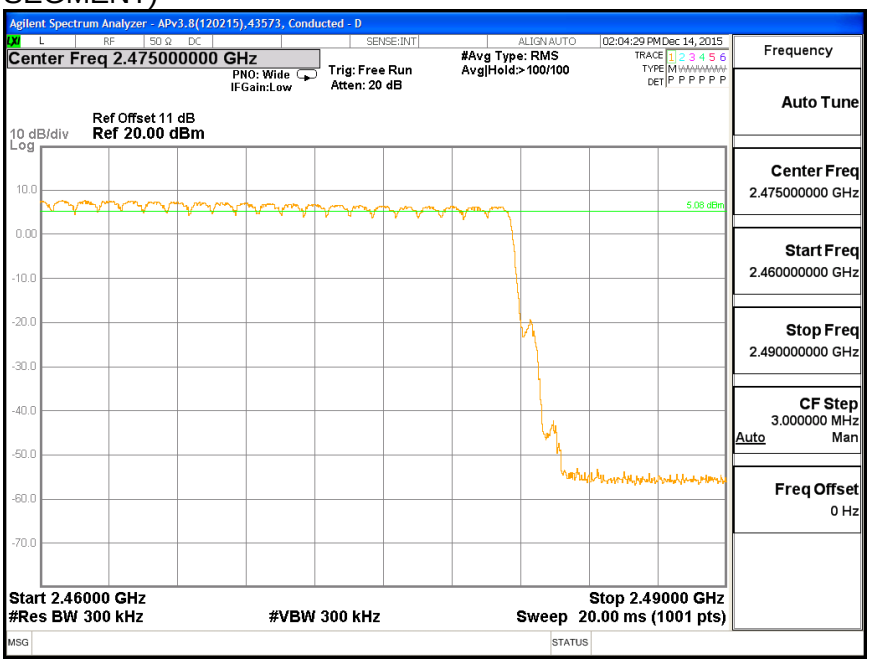

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

7.7.4. AVERAGE TIME OF OCCUPANCY

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-247 (5.1) (4)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.

The average time of occupancy in the specified 31.6 second period (79 channels * 0.4 s) is equal to 10 * (# of pulses in 3.16 s) * pulse width.

RESULTS

8PSK (EDR) Mode

DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of (sec)	Limit (sec)	Margin (sec)
3DH1	0.399	33	0.132	0.4	-0.268
3DH3	1.644	19	0.312	0.4	-0.088
3DH5	2.888	13	0.375	0.4	-0.025

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701I
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

PULSE WIDTH - 3DH1

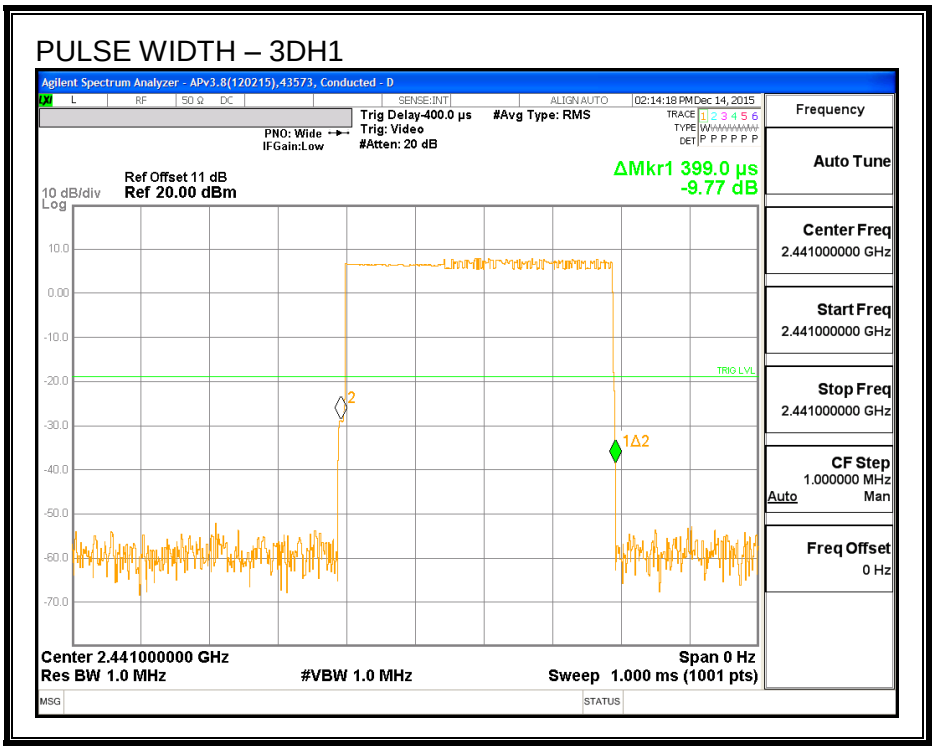

NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – 3DH1

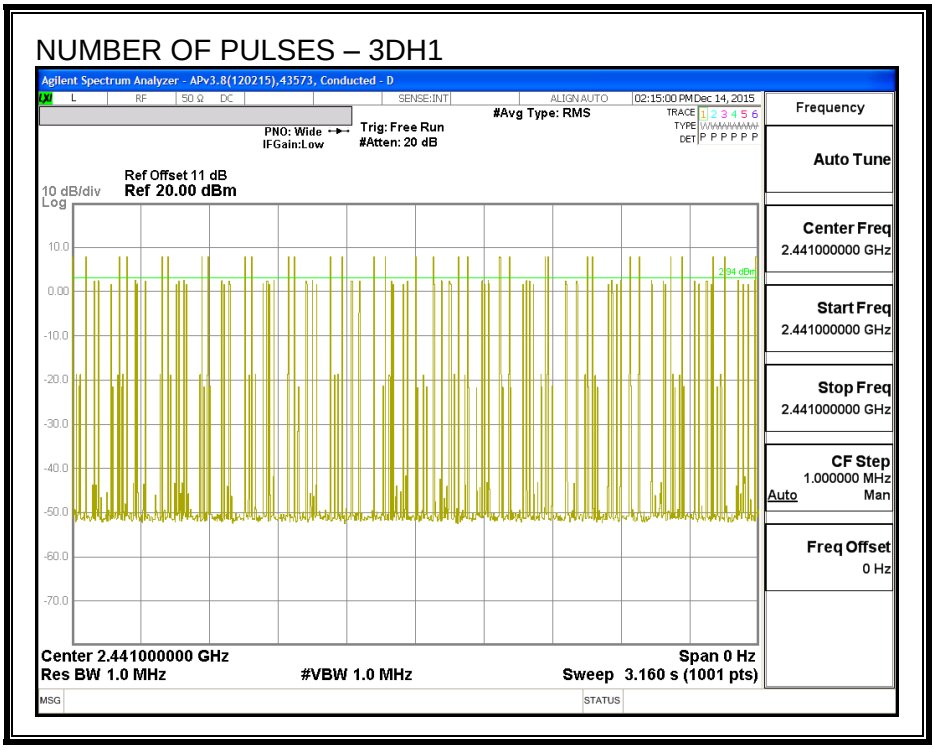

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

PULSE WIDTH – 3DH3

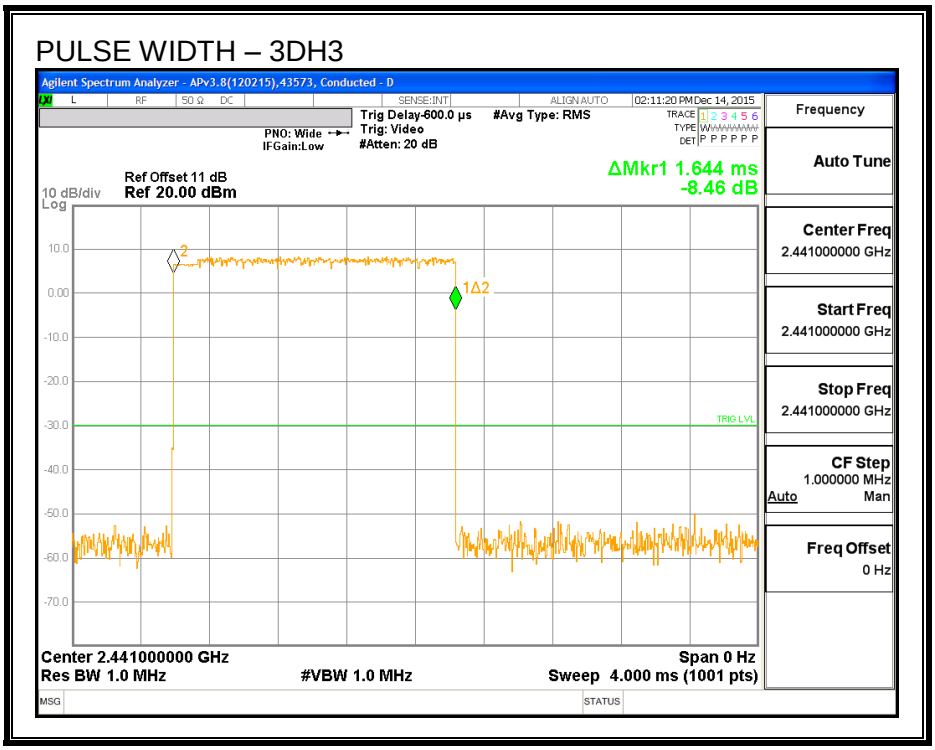

NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – 3DH3

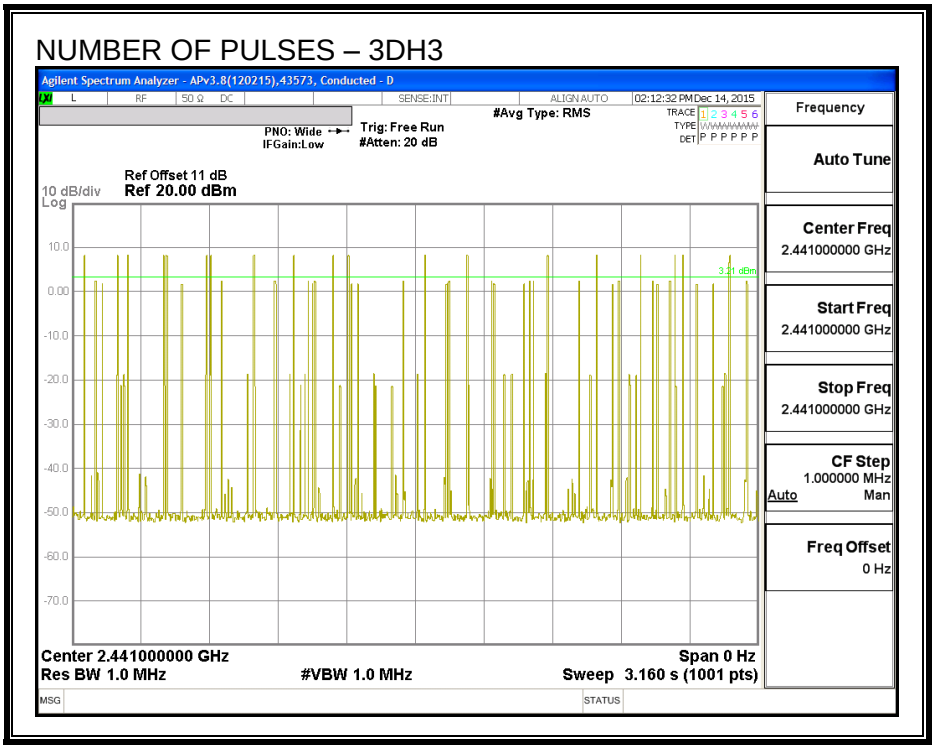

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

PULSE WIDTH – 3DH5

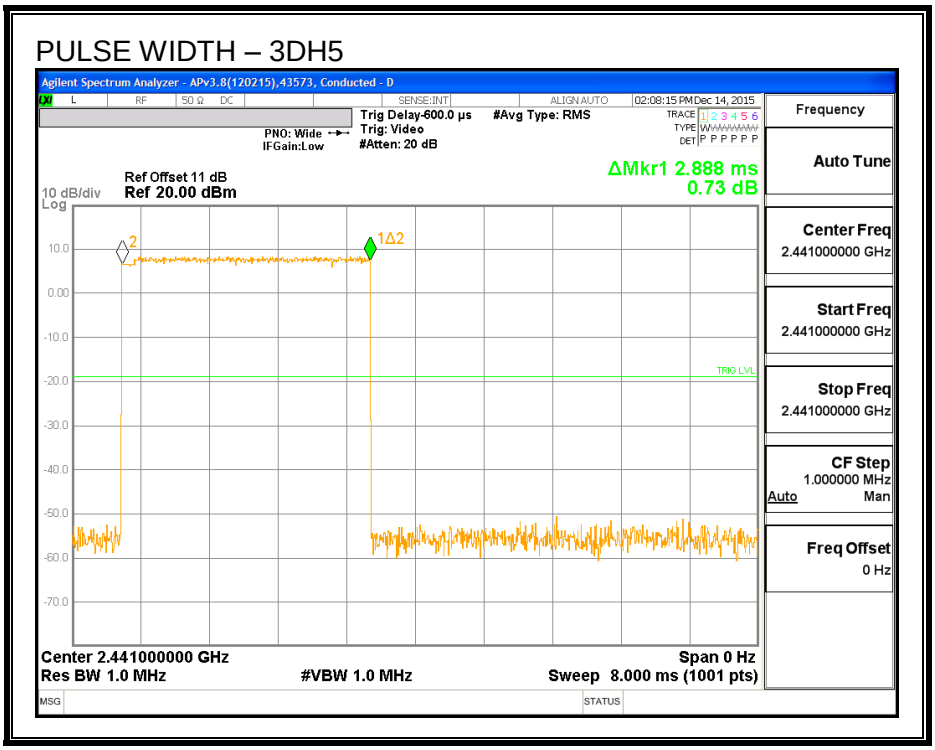

NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – 3DH5

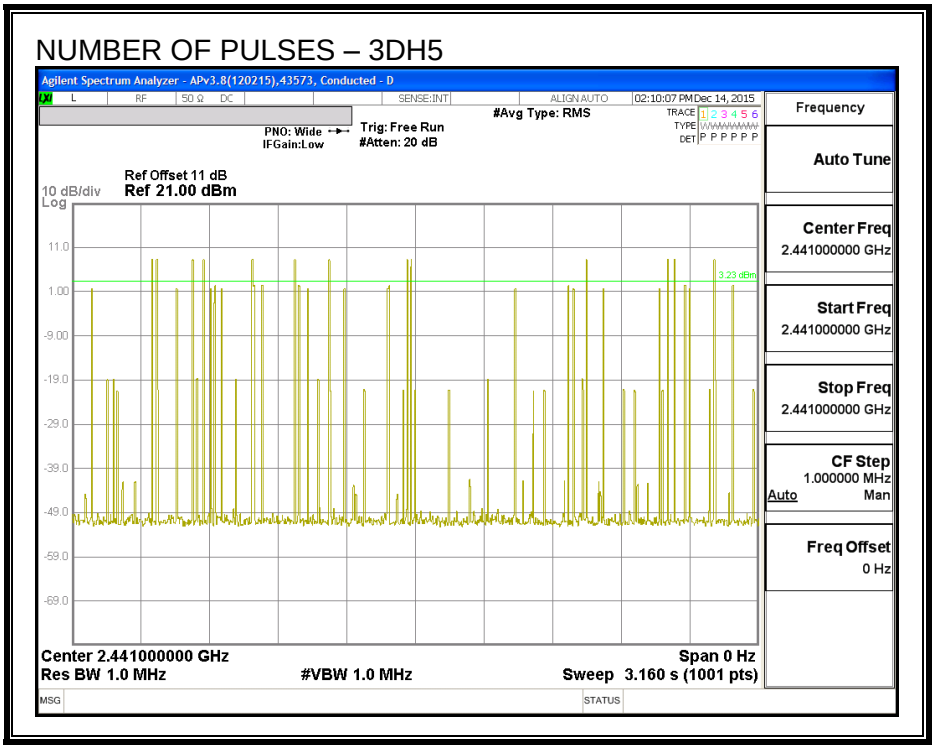

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

7.7.5. OUTPUT POWER

LIMIT

§15.247 (b) (1)

RSS-247 (5.4) (2)

The maximum antenna gain is less than 6 dBi, therefore the limit is 30 dBm.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE

The transmitter output is connected to a wideband peak and average power meter.

RESULTS

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	8.08	21	-12.89
Middle	2441	8.02	21	-12.95
High	2480	7.62	21	-13.35

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

7.7.6. AVERAGE POWER

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 11 dB (including 10 dB pad and 1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	5.50
Middle	2441	5.48
High	2480	5.18

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

7.7.7. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-247 (5.5)

Limit = -20 dBc

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.

RESULTS

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

SPURIOUS EMISSIONS, LOW CHANNEL

LOW CHANNEL BANDEDGE

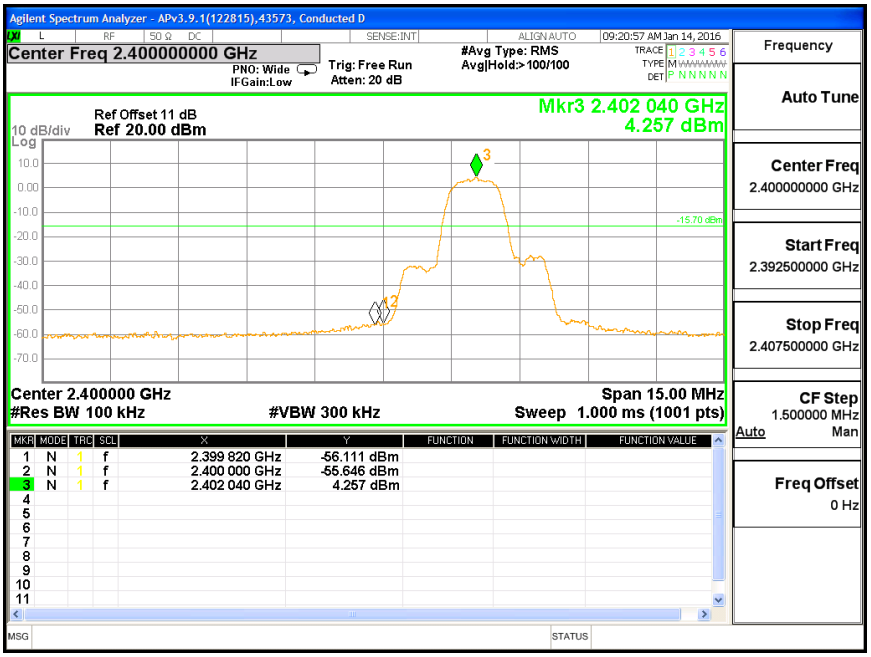

LOW CHANNEL SPURIOUS

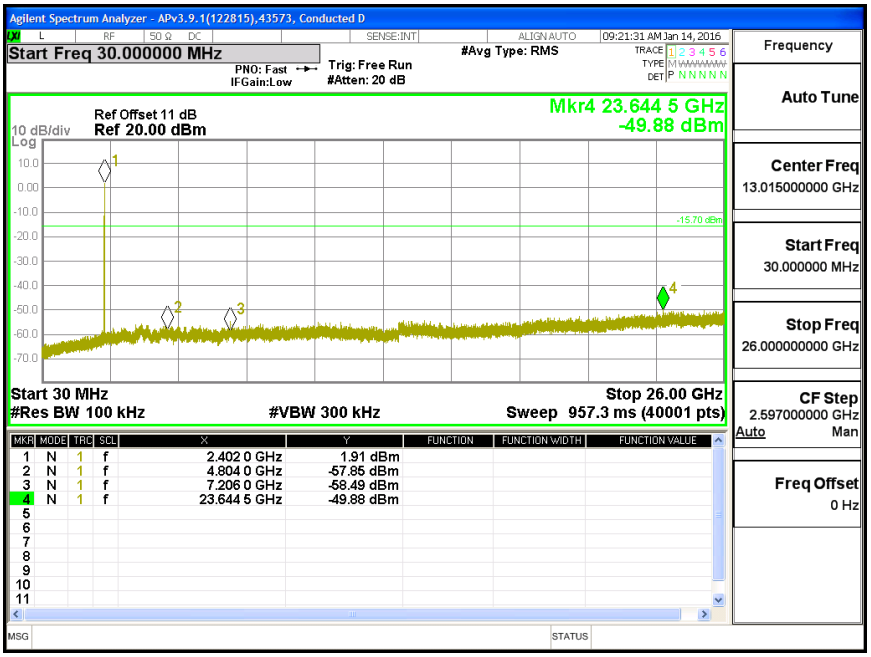

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

SPURIOUS EMISSIONS, MID CHANNEL

MID CHANNEL

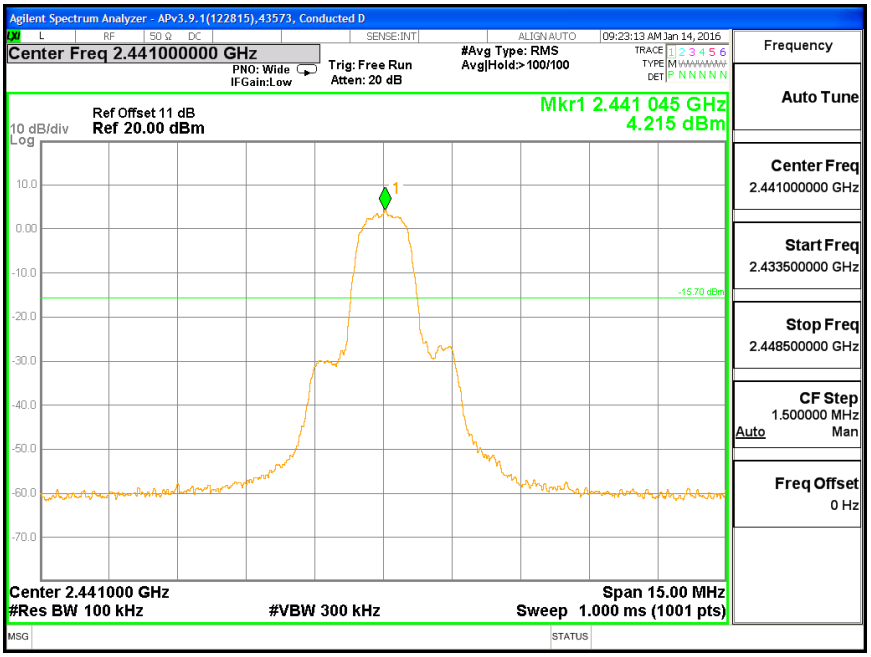

MID CHANNEL SPURIOUS

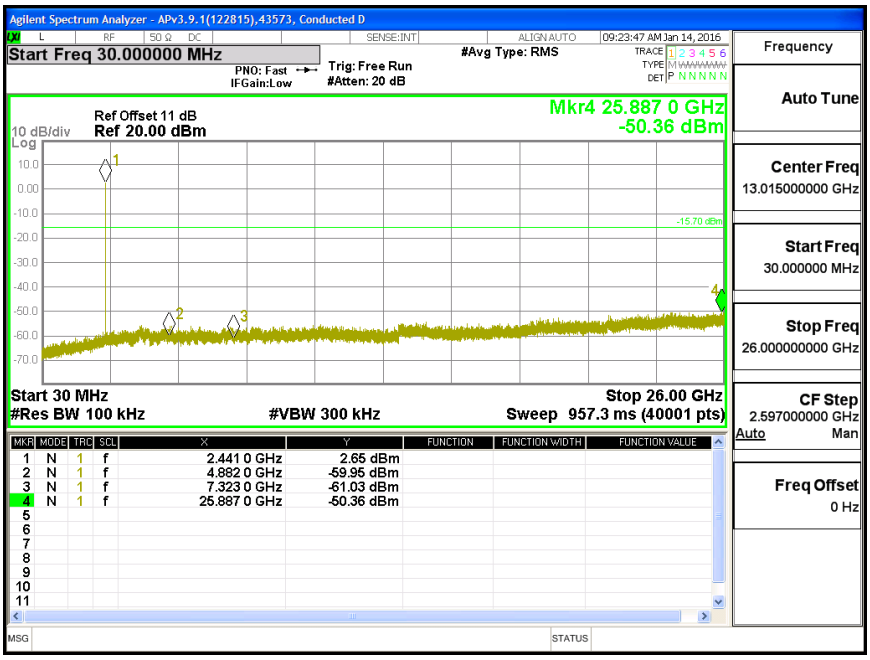

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

SPURIOUS EMISSIONS, HIGH CHANNEL

HIGH CHANNEL BANDEDGE

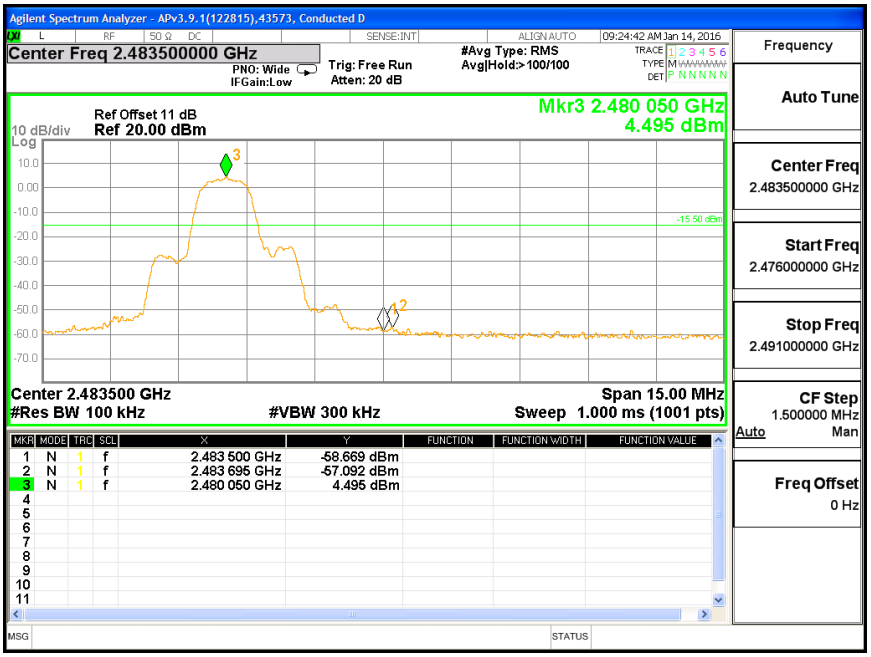

HIGH CHANNEL SPURIOUS

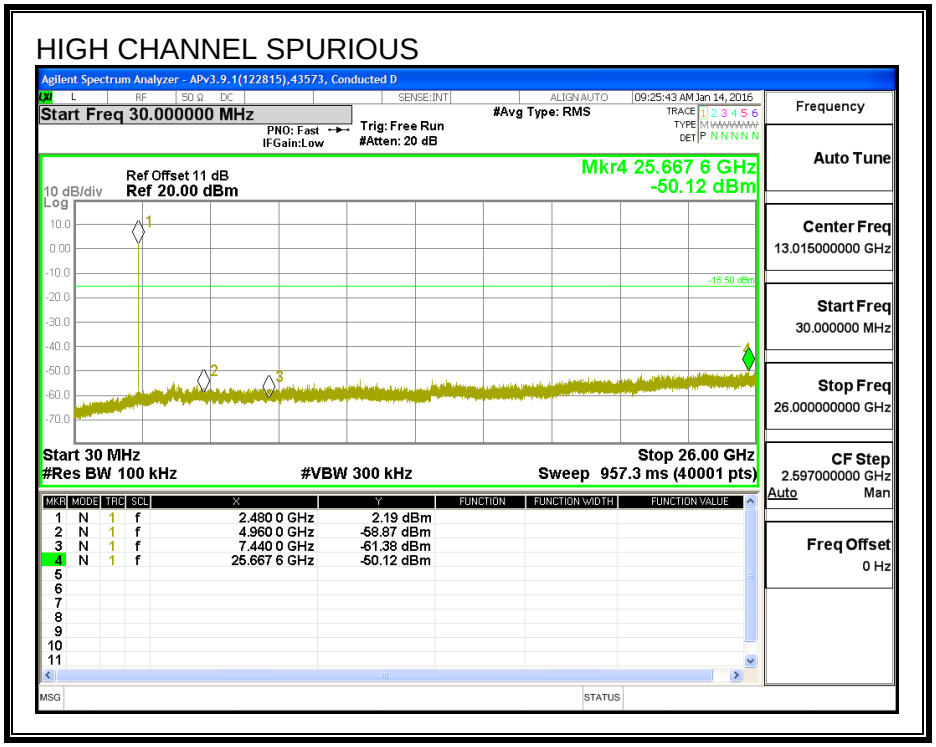

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

LOW BANDEDGE WITH HOPPING ON

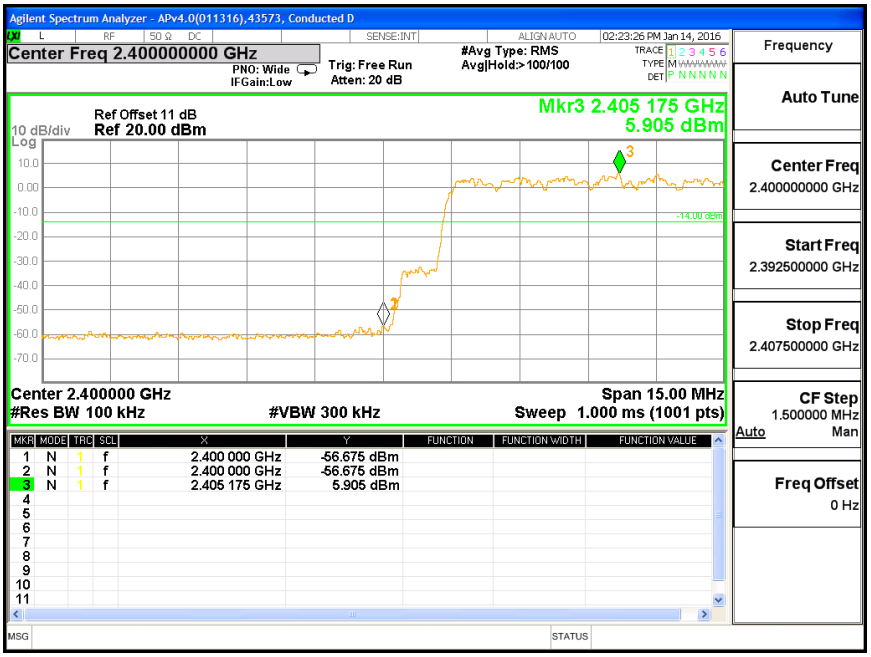

HIGH BANDEDGE WITH HOPPING ON

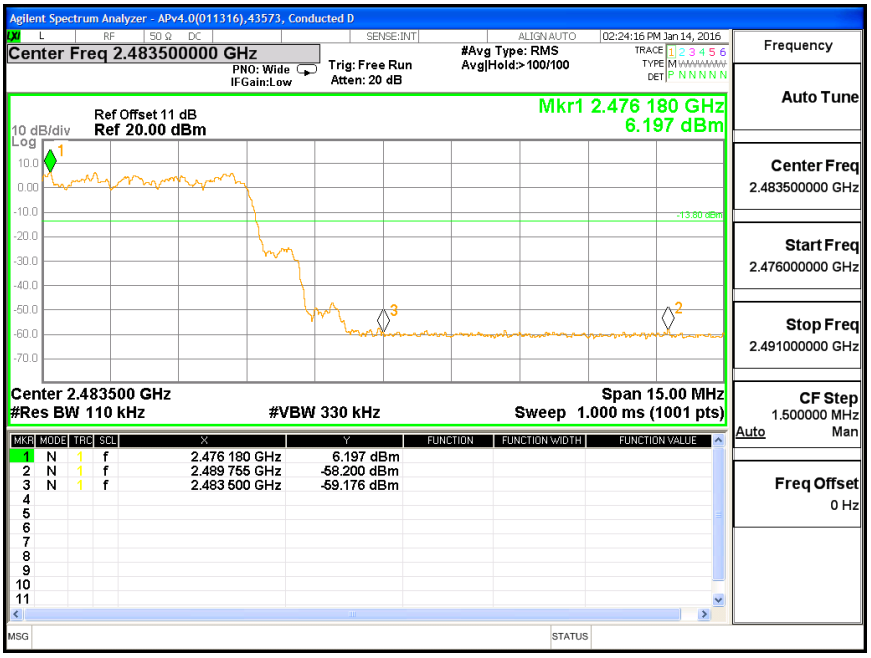

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

7.8. ANTENNA D HIGH POWER BASIC DATA RATE GFSK MODULATION

7.8.1. 20 dB AND 99% BANDWIDTH

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to ≥ 1% of the 20 dB bandwidth. The VBW is set to ≥ RBW. The sweep time is coupled.

RESULTS

Channel	Frequency (MHz)	20 dB Bandwidth (KHz)	99% Bandwidth (KHz)
Low	2402	896.50	880.23
Middle	2441	920.30	888.52
High	2480	920.70	871.08

20 dB AND 99% BANDWIDTH

BANDWIDTH LOW CH

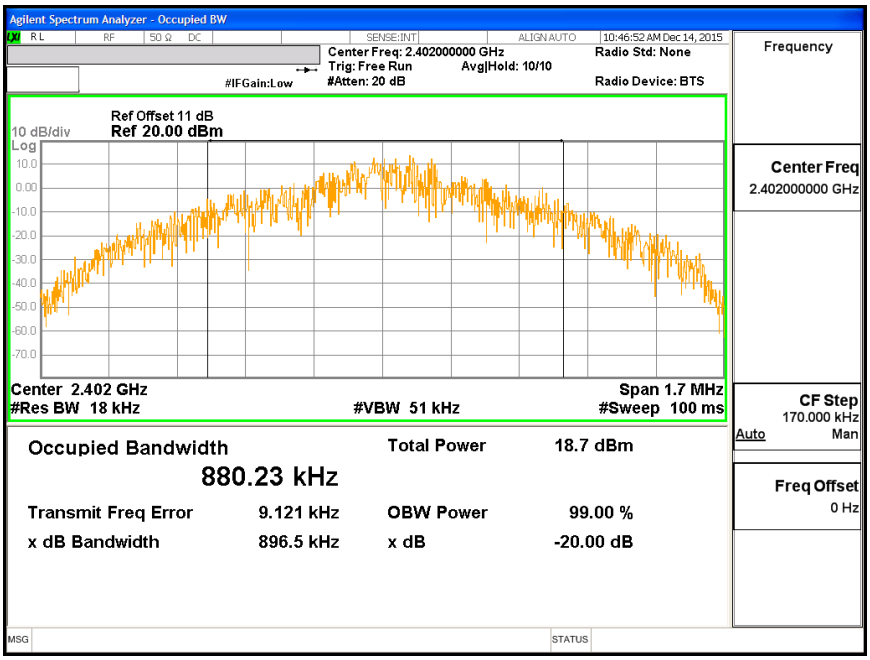

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

BANDWIDTH MID CH

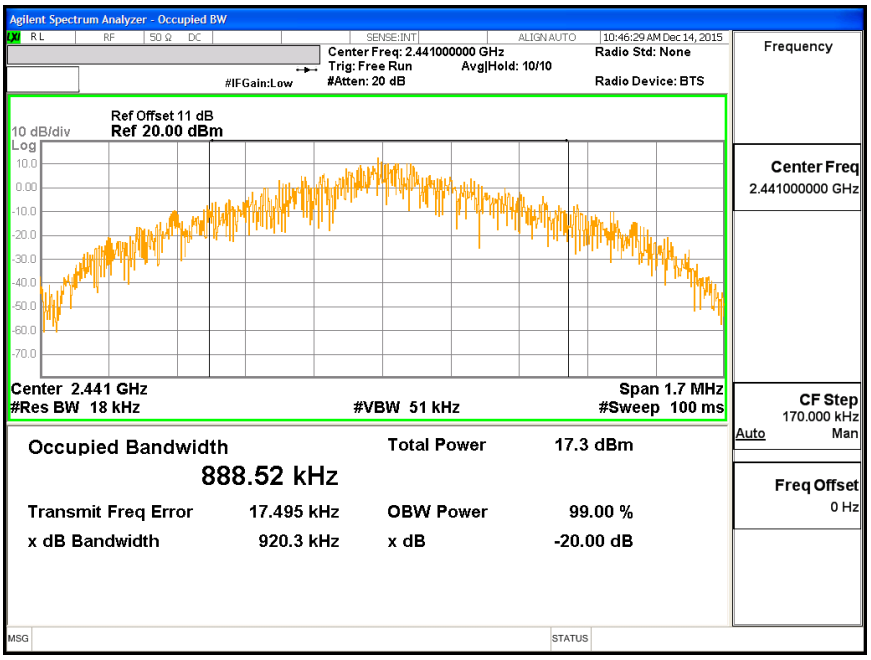

BANDWIDTH HIGH CH

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

7.8.2. HOPPING FREQUENCY SEPARATION

LIMIT

FCC §15.247 (a) (1)

IC RSS-247 (5.1) (2)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hoping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 300 kHz and the VBW is set to 910 kHz. The sweep time is coupled.

RESULTS

HOPPING FREQUENCY SEPARATION

HOPPING FREQUENCY SEPARATION

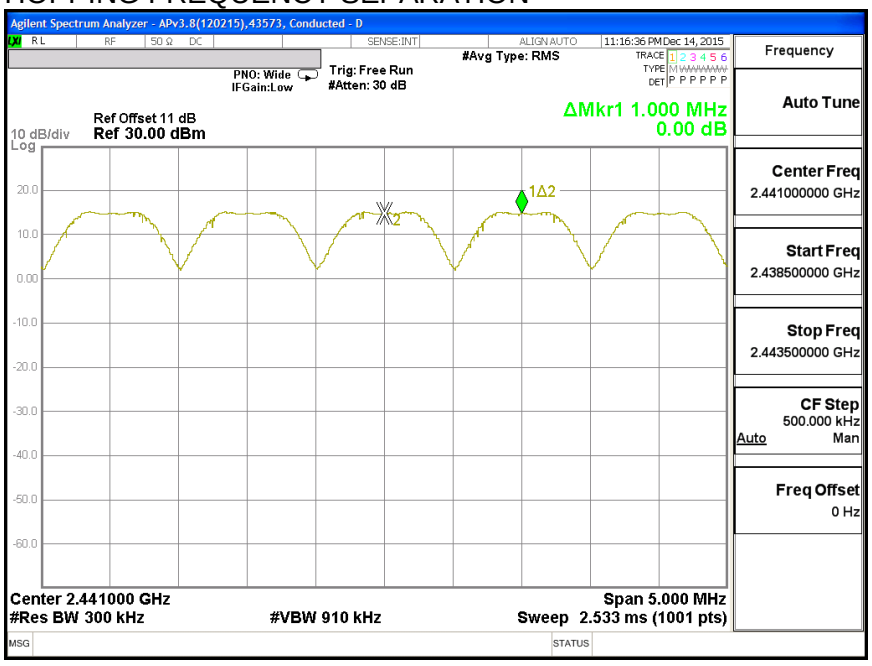

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

7.8.3. NUMBER OF HOPPING CHANNELS

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-247 (5.1) (4)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.

RESULTS

Normal Mode: 79 Channels observed.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

NUMBER OF HOPPING CHANNELS

NUMBER OF HOPPING CHANNELS (100 MHZ SPAN)

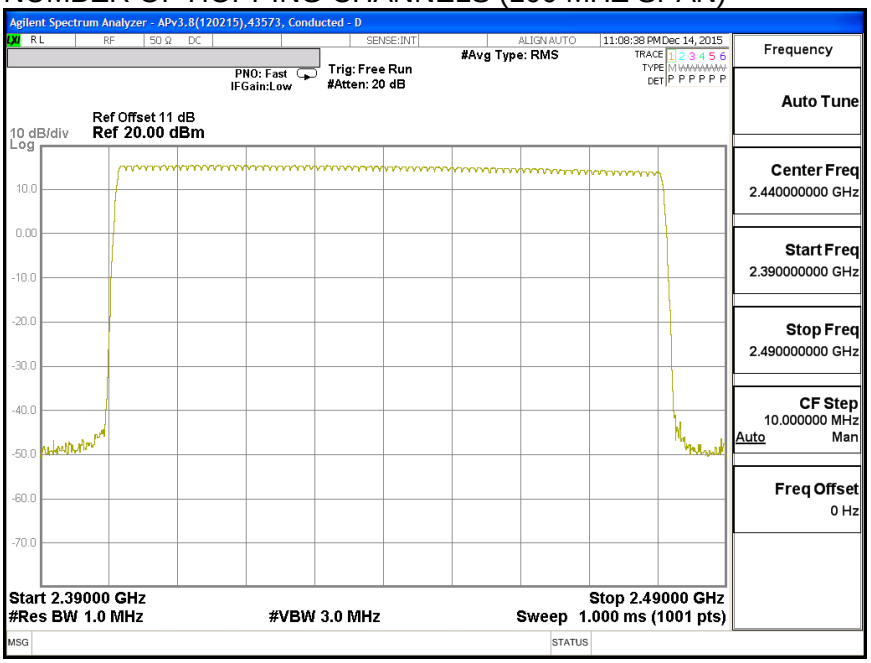

NUMBER OF HOPPING CHANNELS (30 MHZ SPAN, FIRST SEGMENT)

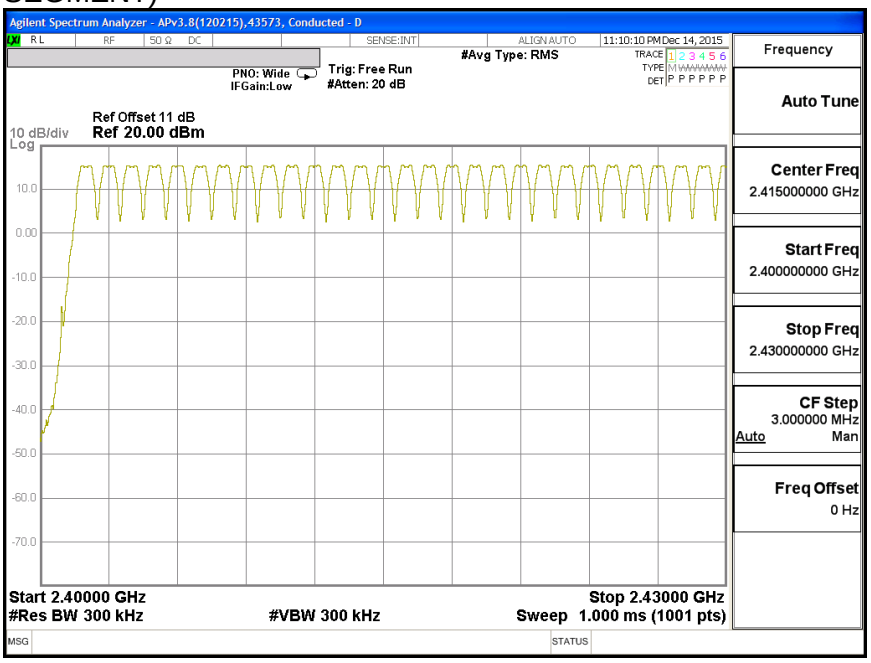

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

NUMBER OF HOPPING CHANNELS (30 MHZ SPAN, SECOND SEGMENT)

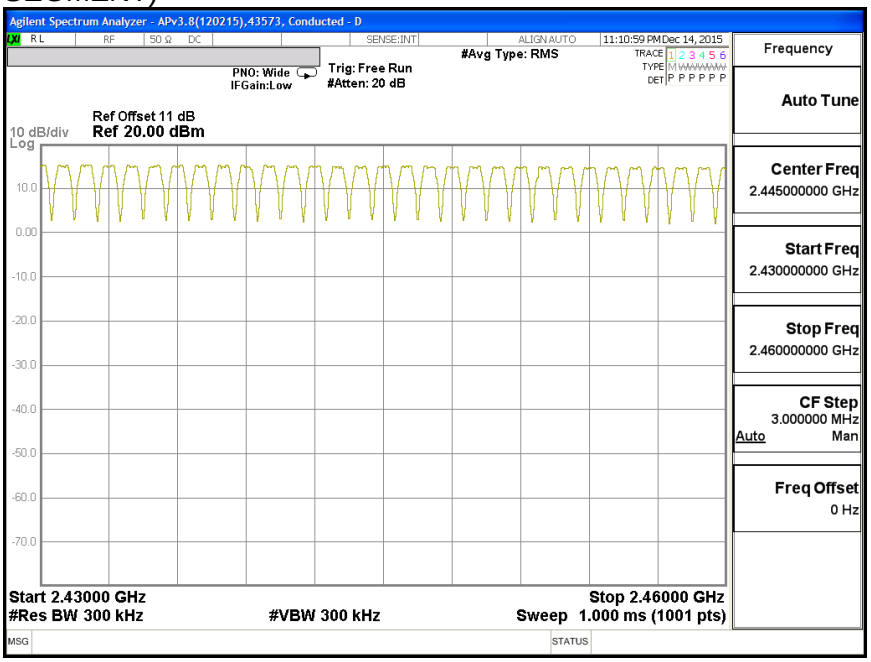

NUMBER OF HOPPING CHANNELS (30 MHZ SPAN, THIRD SEGMENT)

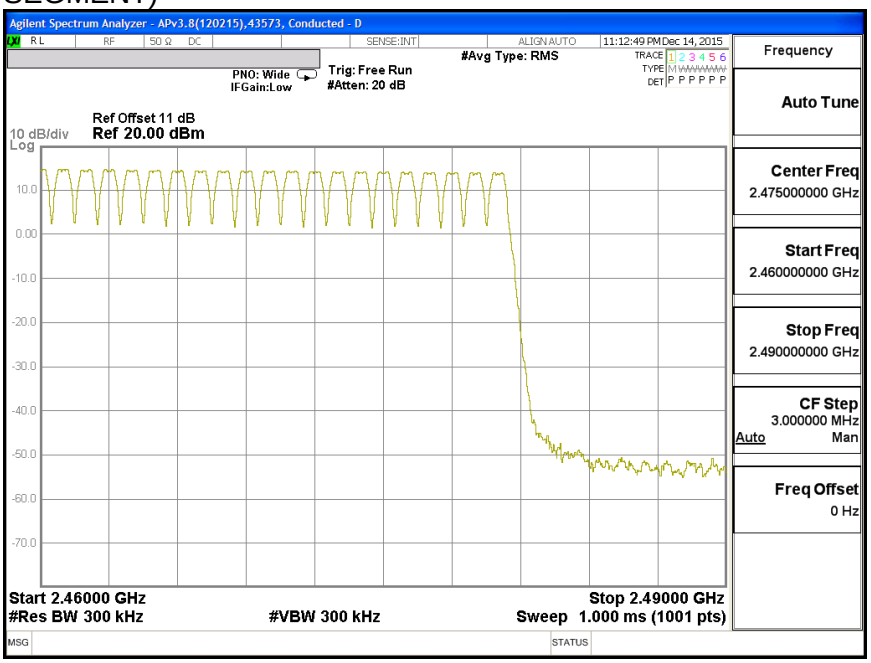

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

7.8.4. AVERAGE TIME OF OCCUPANCY

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-247 (5.1) (4)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.

The average time of occupancy in the specified 31.6 second period (79 channels * 0.4 s) is equal to 10 * (# of pulses in 3.16 s) * pulse width.

For AFH mode, the average time of occupancy in the specified 8 second period (20 channels * 0.4 seconds) is equal to 10 * (# of pulses in 0.8 s) * pulse width.

RESULTS

DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK Normal Mode					
DH1	0.383	32	0.123	0.4	-0.277
DH3	1.640	16	0.262	0.4	-0.138
DH5	2.886	12	0.346	0.4	-0.054

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

PULSE WIDTH - DH1

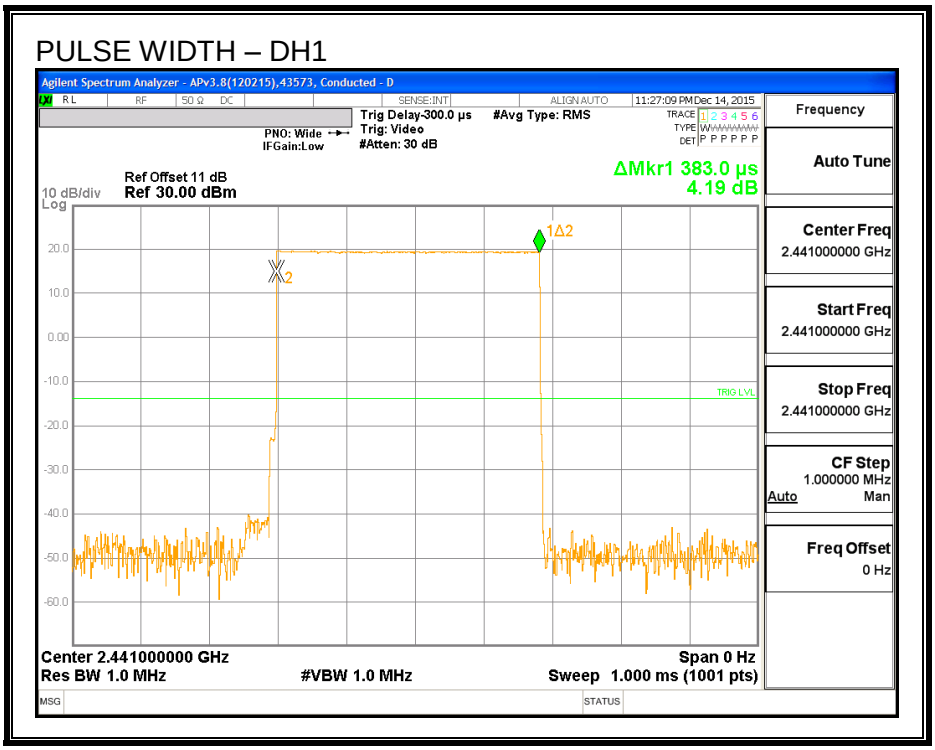

NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH1

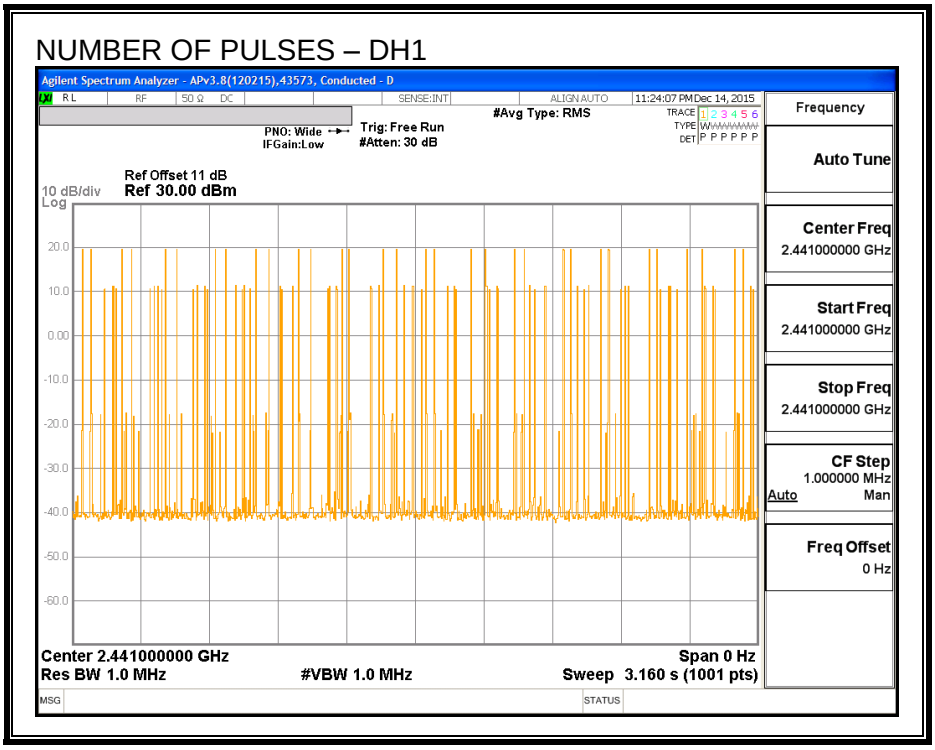

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

PULSE WIDTH – DH3

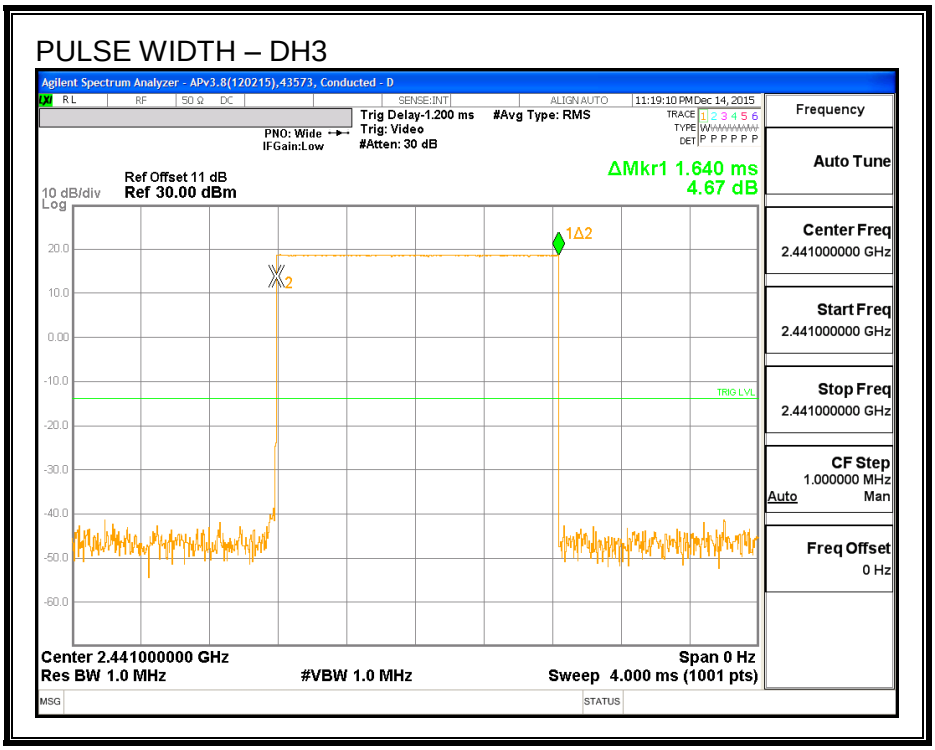

NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH3

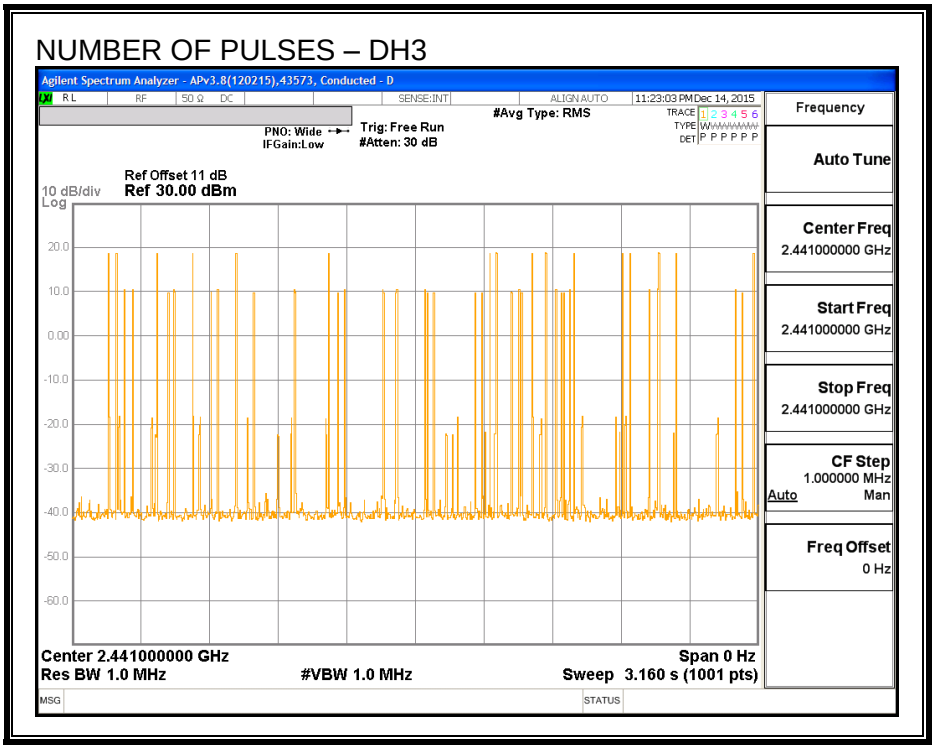

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

PULSE WIDTH – DH5

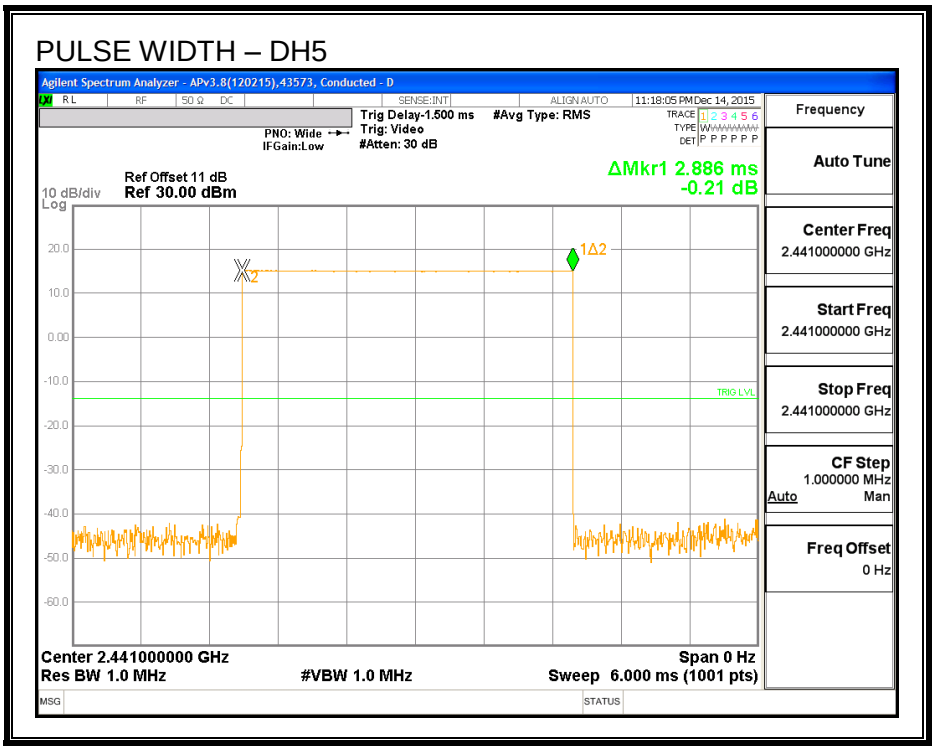

NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH5

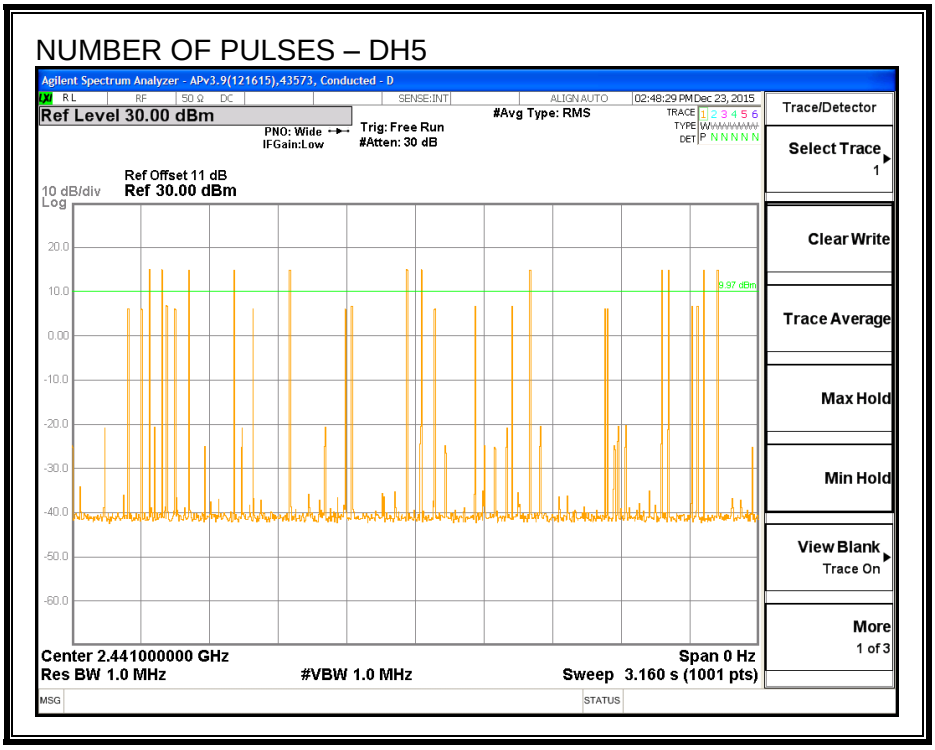

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

7.8.5. OUTPUT POWER

LIMIT

§15.247 (b) (1)

RSS-247 (5.4) (2)

The maximum antenna gain is less than 6 dBi, therefore the limit is 30 dBm.

TEST PROCEDURE

The transmitter output is connected to a wideband peak and average power meter.

RESULTS

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	12.16	30	-17.84
Middle	2441	12.02	30	-17.98
High	2480	12.08	30	-17.92

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

7.8.6. AVERAGE POWER

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 11 dB (including 10 dB pad and 1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	11.85
Middle	2441	11.73
High	2480	11.79

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

7.8.7. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-247 (5.5)

Limit = -20 dBc

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.

RESULTS

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

SPURIOUS EMISSIONS, LOW CHANNEL

LOW CHANNEL BANDEDGE

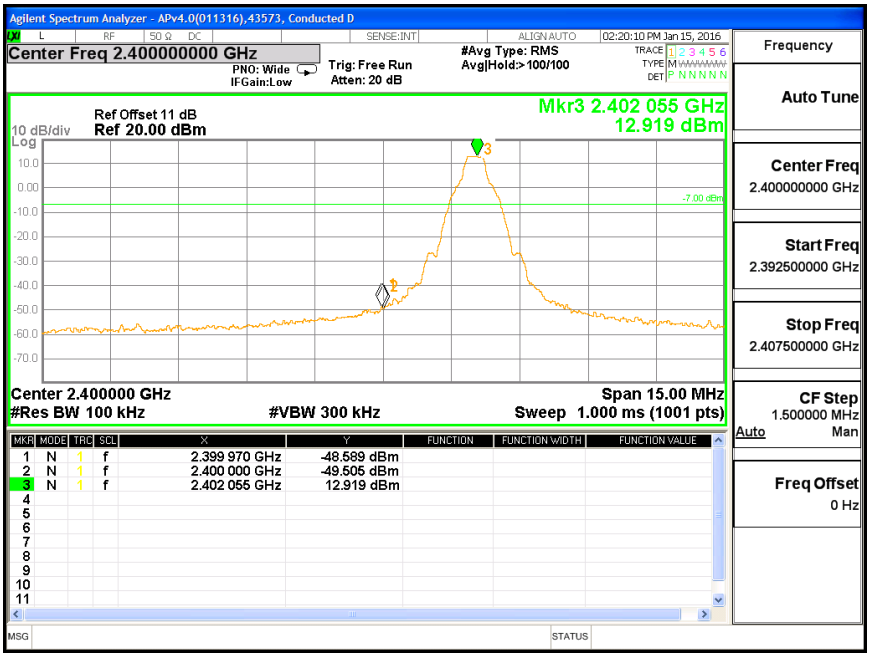

LOW CHANNEL SPURIOUS

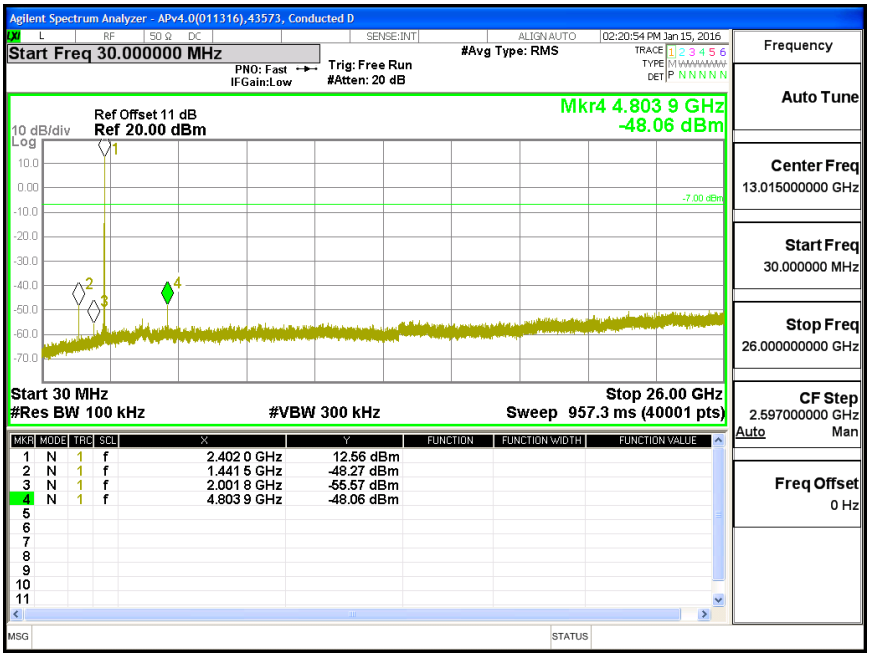

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

SPURIOUS EMISSIONS, MID CHANNEL

MID CHANNEL

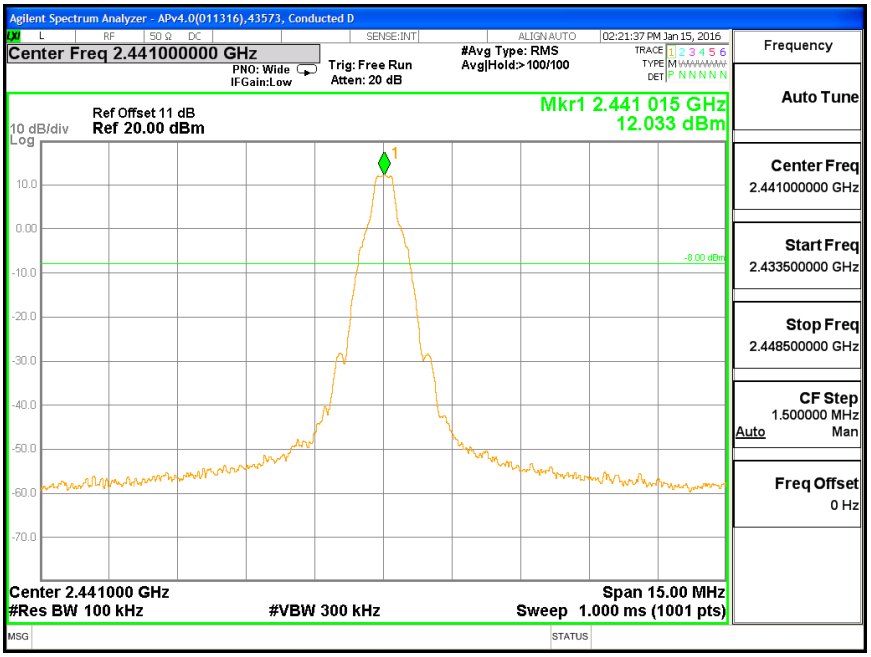

MID CHANNEL SPURIOUS

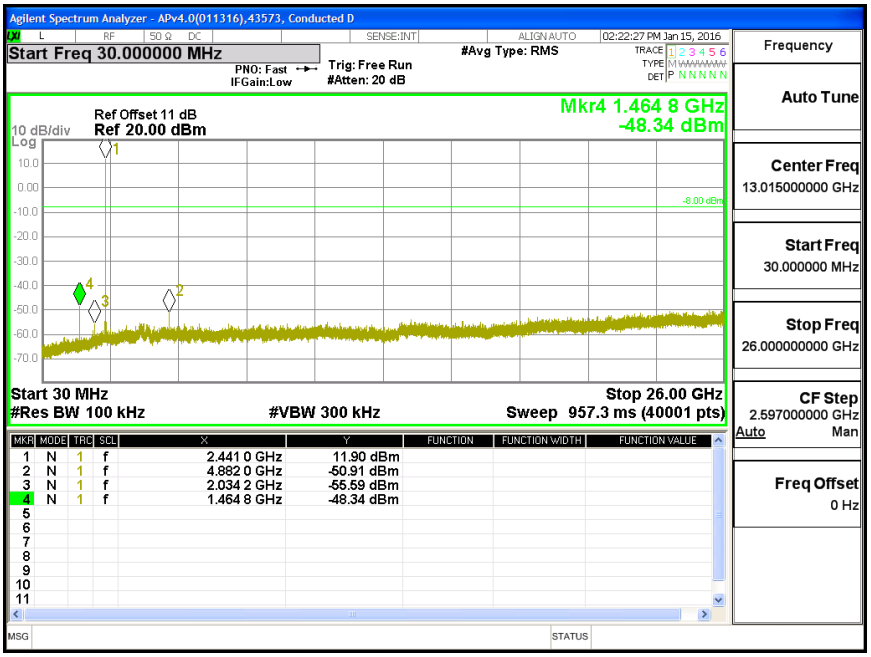

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

SPURIOUS EMISSIONS, HIGH CHANNEL

HIGH CHANNEL BANDEDGE

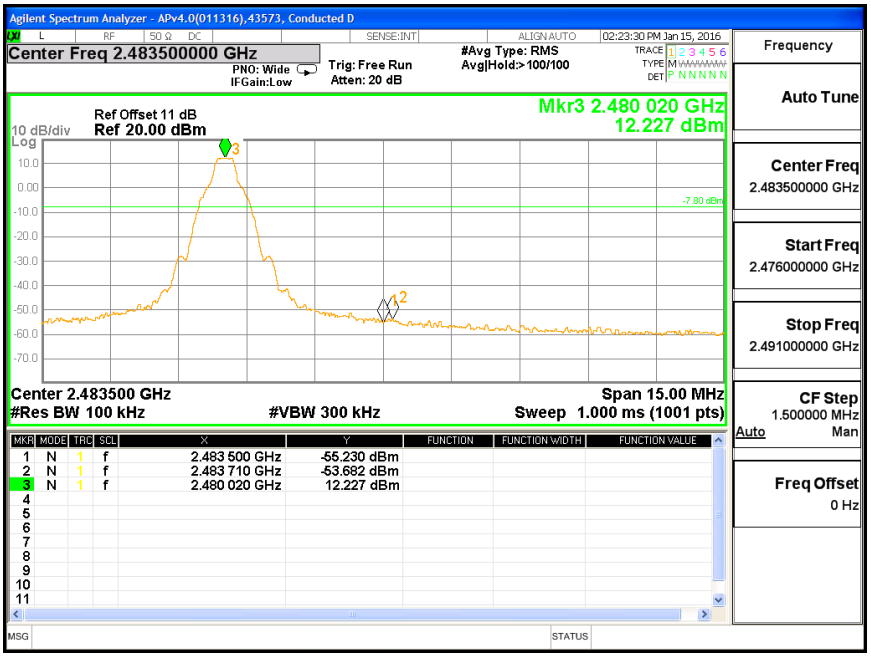

HIGH CHANNEL SPURIOUS

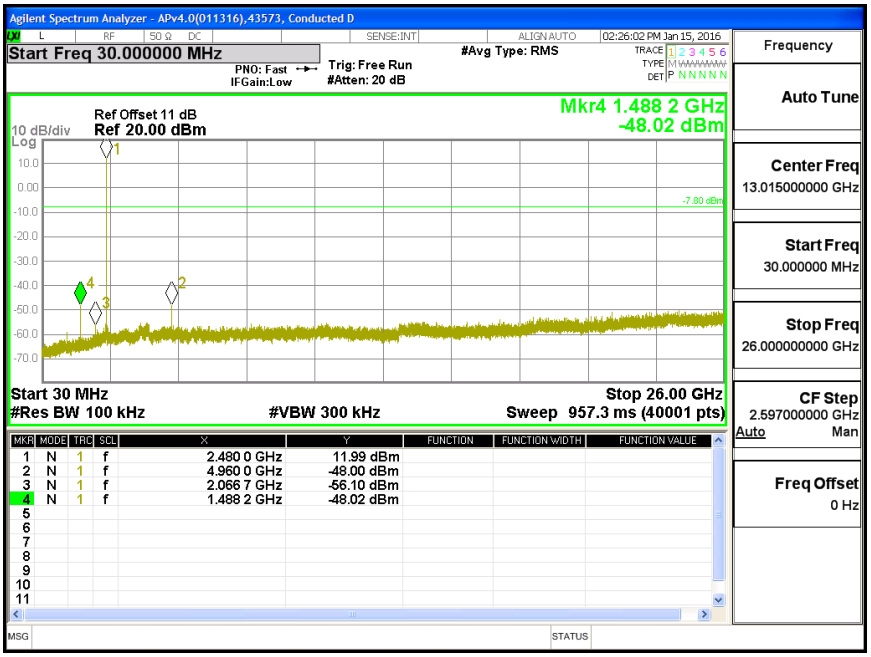

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

LOW BANDEDGE WITH HOPPING ON

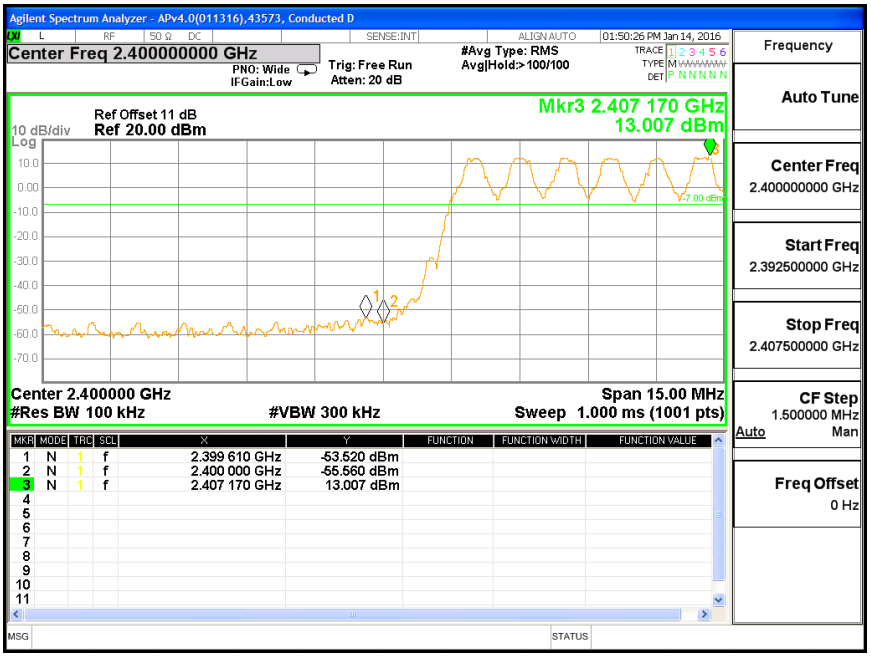

HIGH BANDEDGE WITH HOPPING ON

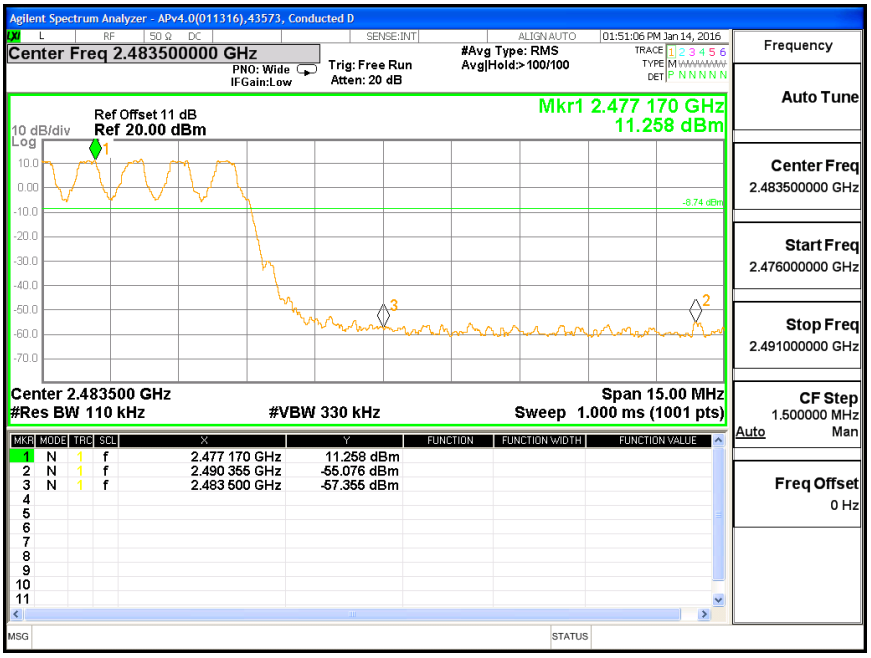

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

7.9. ANTENNA D HIGH POWER ENHANCED DATA RATE QPSK MODULATION

7.9.1. OUTPUT POWER

LIMIT

§15.247 (b) (1)

RSS-247 (5.4) (2)

The maximum antenna gain is less than 6 dBi, therefore the limit is 30 dBm.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE

The transmitter output is connected to a wideband peak and average power meter.

RESULTS

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	13.02	21	-7.95
Middle	2441	13.16	21	-7.81
High	2480	13.13	21	-7.84

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

7.9.2. AVERAGE POWER

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 11 dB (including 10 dB pad and 1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	10.23
Middle	2441	10.48
High	2480	10.47

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

7.10. ANTENNA D HIGH POWER ENHANCED DATA RATE 8PSK MODULATION

7.10.1. 20 dB AND 99% BANDWIDTH

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to ≥ 1% of the 20 dB bandwidth. The VBW is set to ≥ RBW. The sweep time is coupled.

RESULTS

Channel	Frequency (MHz)	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	2402	1.3140	1.1958
Middle	2441	1.3290	1.1077
High	2480	1.3440	1.2084

20 dB AND 99% BANDWIDTH

BANDWIDTH LOW CH

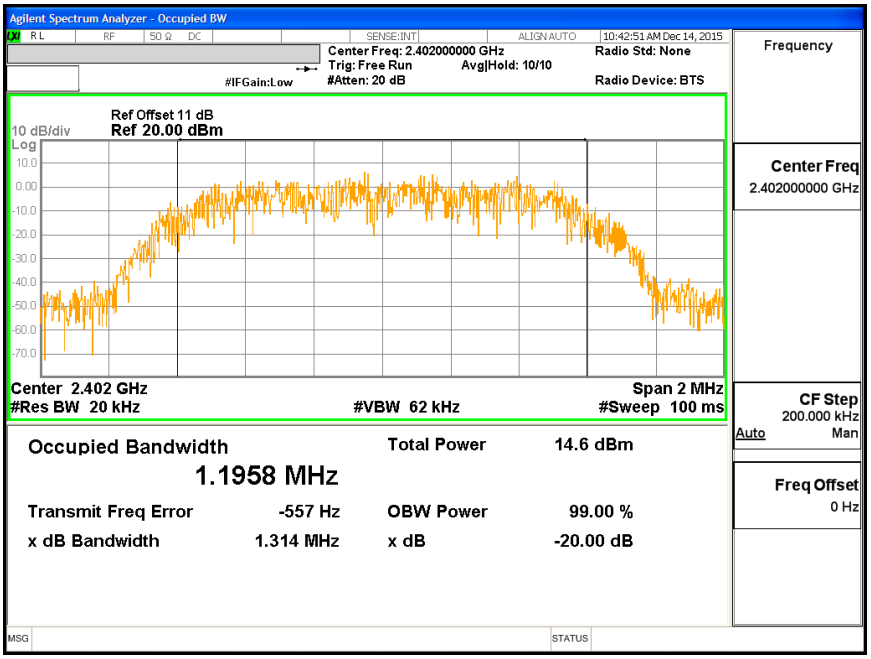

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

BANDWIDTH MID CH

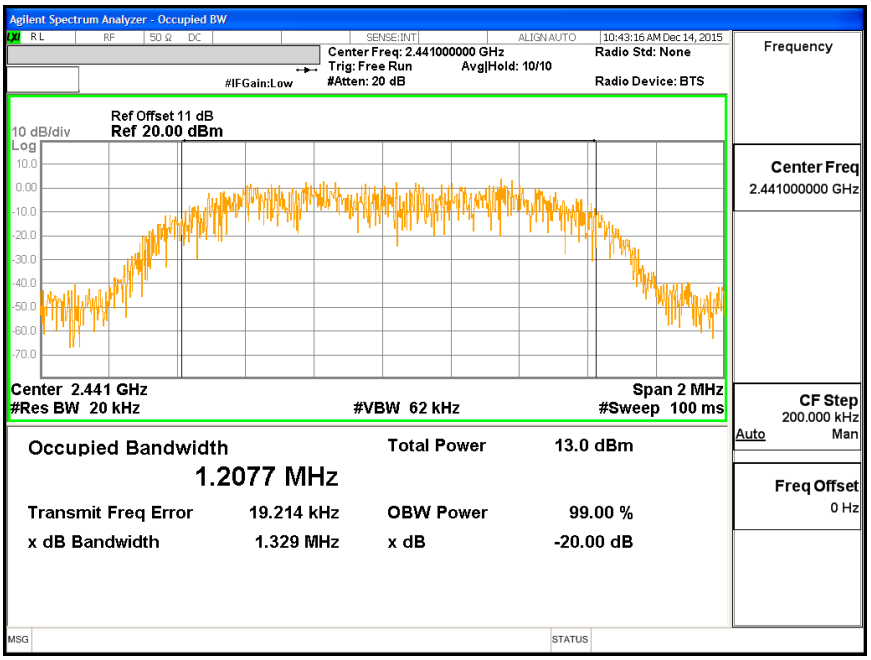

BANDWIDTH HIGH CH

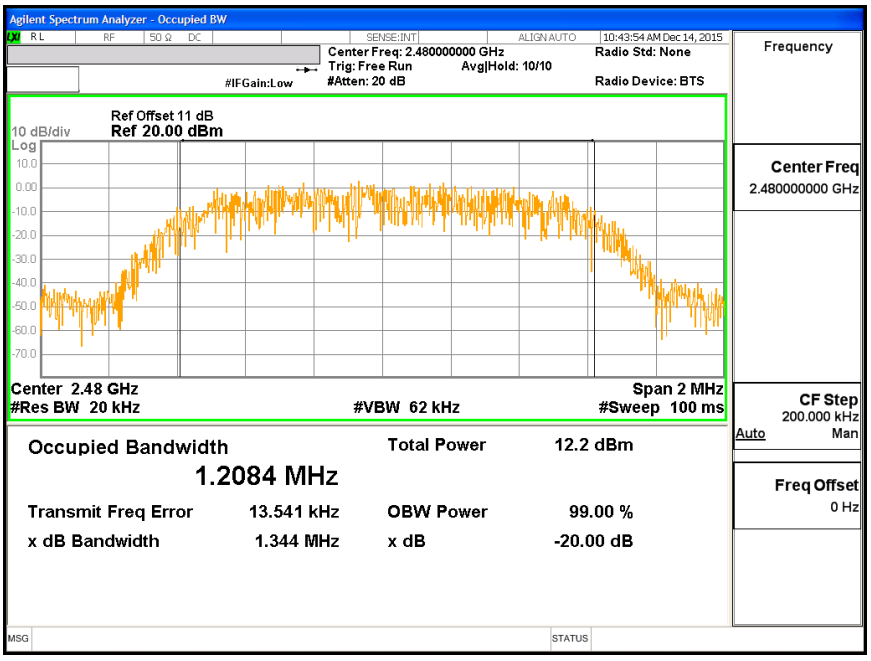

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

7.10.2. HOPPING FREQUENCY SEPARATION

LIMIT

FCC §15.247 (a) (1)

IC RSS-247 (5.1) (2)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hoping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 300 kHz and the VBW is set to 910 kHz. The sweep time is coupled.

RESULTS

HOPPING FREQUENCY SEPARATION

HOPPING FREQUENCY SEPARATION

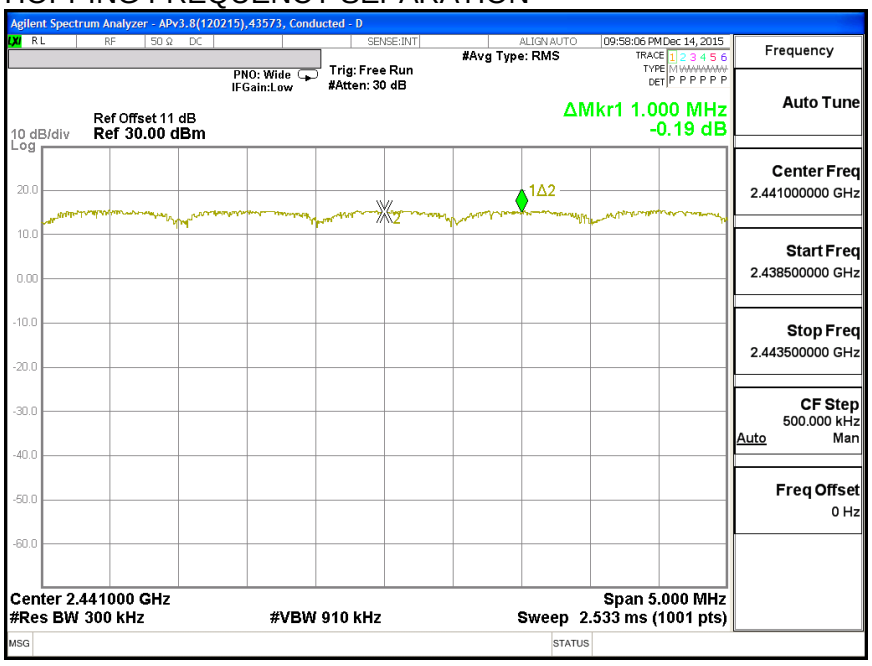

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

7.10.3. NUMBER OF HOPPING CHANNELS

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-247 (5.1) (4)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.

RESULTS

Normal Mode: 79 Channels observed.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

NUMBER OF HOPPING CHANNELS

NUMBER OF HOPPING CHANNELS (100 MHZ SPAN)

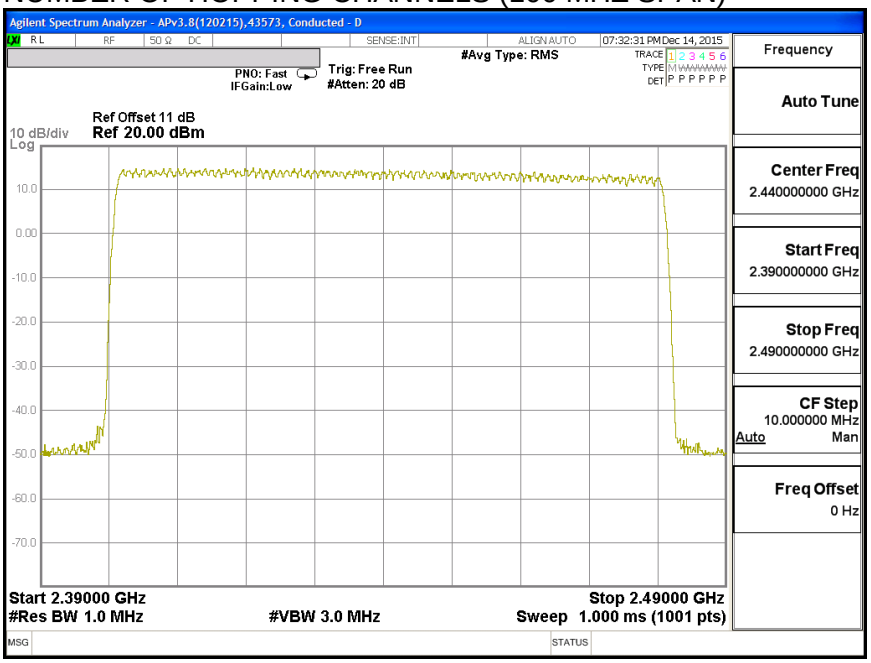

NUMBER OF HOPPING CHANNELS (30 MHZ SPAN, FIRST SEGMENT)

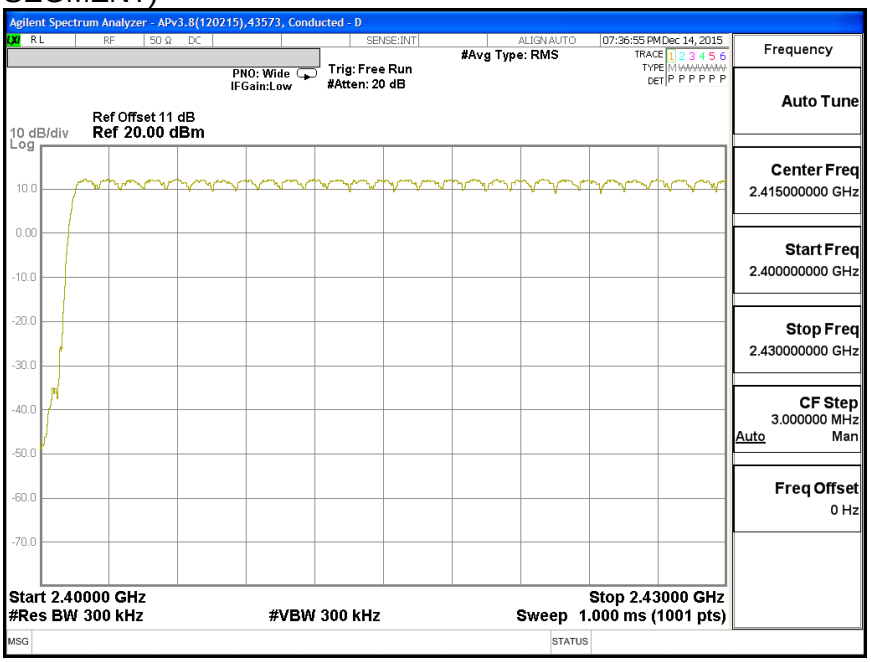

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

NUMBER OF HOPPING CHANNELS (30 MHZ SPAN, SECOND SEGMENT)

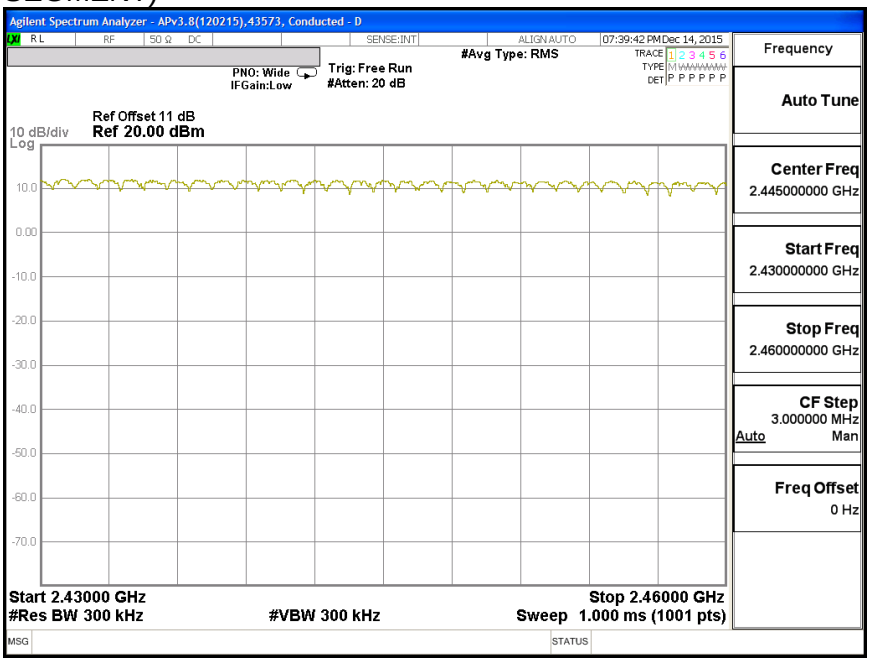

NUMBER OF HOPPING CHANNELS (30 MHZ SPAN, THIRD SEGMENT)

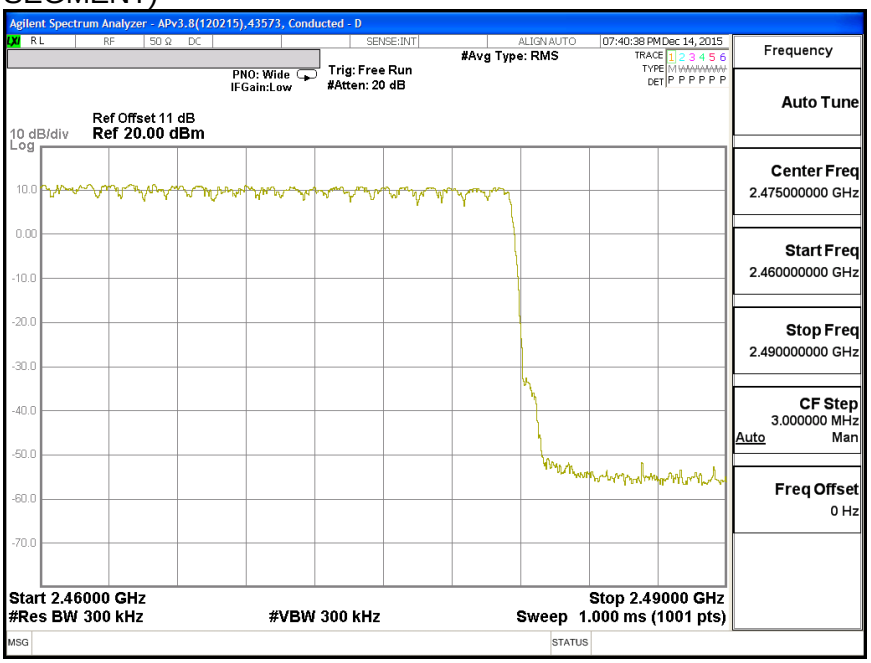

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.