



**FCC 47 CFR PART 15 SUBPART C
INDUSTRY CANADA RSS-247 ISSUE 1**

CERTIFICATION TEST REPORT

FOR

PORTABLE COMPUTER

MODEL NUMBER: A1707

**FCC ID: BCGA1707
IC: 579C-A1707**

REPORT NUMBER: 16U23800-E3V2

ISSUE DATE: OCTOBER 13, 2016

Prepared for
**APPLE, INC.
1 INFINITE LOOP
CUPERTINO, CA 95014, U.S.A.**

Prepared by
**UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
V1	09/28/2016	Initial Issue	Joe Vang
V2	10/13/2016	Updated Section 5.2 to address TCB's questions	Tina Chu

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	8
2. TEST METHODOLOGY	9
3. FACILITIES AND ACCREDITATION	9
4. CALIBRATION AND UNCERTAINTY	9
4.1. MEASURING INSTRUMENT CALIBRATION	9
4.2. SAMPLE CALCULATION	9
4.3. MEASUREMENT UNCERTAINTY	10
5. EQUIPMENT UNDER TEST	11
5.1. DESCRIPTION OF EUT	11
5.2. MAXIMUM OUTPUT POWER	11
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	11
5.4. SOFTWARE AND FIRMWARE	11
5.5. WORST-CASE CONFIGURATION AND MODE	12
5.6. DESCRIPTION OF TEST SETUP	13
6. TEST AND MEASUREMENT EQUIPMENT	18
7. MEASUREMENT METHODS	19
8. ANTENNA PORT TEST RESULTS	20
8.1. 802.11b SISO MODE IN THE 2.4 GHZ BAND, CHAIN 0	25
8.1.1. 6 dB BANDWIDTH	25
8.1.2. 99% BANDWIDTH	29
8.1.3. AVERAGE POWER	33
8.1.4. OUTPUT POWER	34
8.1.5. POWER SPECTRAL DENSITY	36
8.1.6. OUT-OF-BAND EMISSIONS	40
8.2. 802.11b SISO MODE IN THE 2.4 GHZ BAND, CHAIN 1	46
8.2.1. 6 dB BANDWIDTH	46
8.2.2. 99% BANDWIDTH	50
8.2.3. AVERAGE POWER	54
8.2.4. OUTPUT POWER	55
8.2.5. POWER SPECTRAL DENSITY	57
8.2.6. OUT-OF-BAND EMISSIONS	61
8.3. 802.11b SISO MODE IN THE 2.4 GHZ BAND, CHAIN 2	67
8.3.1. 6 dB BANDWIDTH	67
8.3.2. 99% BANDWIDTH	71
8.3.3. AVERAGE POWER	75
8.3.4. OUTPUT POWER	76
8.3.5. POWER SPECTRAL DENSITY	78
8.3.6. OUT-OF-BAND EMISSIONS	82

8.4.	802.11b 2TX MODE IN THE 2.4 GHZ BAND, CHAIN 0+1	88
8.4.1.	6 dB BANDWIDTH.....	88
8.4.2.	99% BANDWIDTH.....	93
8.4.3.	AVERAGE POWER	98
8.4.4.	OUTPUT POWER	99
8.4.5.	POWER SPECTRAL DENSITY	101
8.4.6.	OUT-OF-BAND EMISSIONS	106
8.5.	802.11b 2TX MODE IN THE 2.4 GHz BAND, CHAIN 0+2	115
8.5.1.	6 dB BANDWIDTH.....	115
8.5.2.	99% BANDWIDTH.....	120
8.5.3.	AVERAGE POWER	125
8.5.4.	OUTPUT POWER	126
8.5.5.	POWER SPECTRAL DENSITY	128
8.5.6.	OUT-OF-BAND EMISSIONS	133
8.6.	802.11b 2TX MODE IN THE 2.4 GHZ BAND, CHAIN 1+2	142
8.6.1.	6 dB BANDWIDTH.....	142
8.6.2.	99% BANDWIDTH.....	147
8.6.3.	AVERAGE POWER	152
8.6.4.	OUTPUT POWER	153
8.6.5.	POWER SPECTRAL DENSITY	155
8.6.6.	OUT-OF-BAND EMISSIONS	160
8.7.	802.11b 3TX MODE IN THE 2.4 GHZ BAND	169
8.7.1.	6 dB BANDWIDTH.....	169
8.7.2.	99% BANDWIDTH.....	176
8.7.3.	AVERAGE POWER	183
8.7.4.	OUTPUT POWER	184
8.7.5.	POWER SPECTRAL DENSITY	186
8.7.6.	OUT-OF-BAND EMISSIONS	193
8.8.	802.11g SISO MODE IN THE 2.4 GHZ BAND, CHAIN 0	206
8.9.	802.11g SISO MODE IN THE 2.4 GHZ BAND, CHAIN 1	207
8.10.	802.11g SISO MODE IN THE 2.4 GHZ BAND, CHAIN 2.....	208
8.11.	802.11g 2TX MODE IN THE 2.4 GHZ BAND, CHAIN 0+1.....	209
8.12.	802.11g 2TX MODE IN THE 2.4 GHZ BAND, CHAIN 0+2.....	210
8.13.	802.11g 2TX MODE IN THE 2.4 GHZ BAND, CHAIN 1+2.....	211
8.14.	802.11g 3TX MODE IN THE 2.4 GHZ BAND	212
8.15.	802.11n HT20 SISO MODE IN THE 2.4 GHZ BAND, CHAIN 0	213
8.15.1.	6 dB BANDWIDTH	213
8.15.2.	99% BANDWIDTH	218
8.15.3.	AVERAGE POWER	223
8.15.4.	OUTPUT POWER	224
8.15.5.	POWER SPECTRAL DENSITY.....	226
8.15.6.	OUT-OF-BAND EMISSIONS.....	231
8.16.	802.11n HT20 SISO MODE IN THE 2.4 GHZ BAND, CHAIN 1	240
8.16.1.	6 dB BANDWIDTH	240
8.16.2.	99% BANDWIDTH	245
8.16.3.	AVERAGE POWER	250
8.16.4.	OUTPUT POWER.....	251

8.16.5.	POWER SPECTRAL DENSITY.....	253
8.16.6.	OUT-OF-BAND EMISSIONS.....	258
8.17.	<i>802.11n HT20 SISO MODE IN THE 2.4 GHZ BAND, CHAIN 2.....</i>	<i>267</i>
8.17.1.	6 dB BANDWIDTH	267
8.17.2.	99% BANDWIDTH	272
8.17.3.	AVERAGE POWER	277
8.17.4.	OUTPUT POWER.....	278
8.17.5.	POWER SPECTRAL DENSITY.....	280
8.17.6.	OUT-OF-BAND EMISSIONS.....	285
8.18.	<i>802.11n 2Tx CDD MODE IN THE 2.4 GHZ BAND, CHAIN 0+1.....</i>	<i>294</i>
8.18.1.	6 dB BANDWIDTH	294
8.18.2.	99% BANDWIDTH	302
8.18.3.	AVERAGE POWER	310
8.18.4.	OUTPUT POWER.....	311
8.18.5.	POWER SPECTRAL DENSITY.....	313
8.18.6.	OUT-OF-BAND EMISSIONS.....	321
8.19.	<i>802.11n 2Tx CDD MODE IN THE 2.4 GHZ BAND, CHAIN 0+2.....</i>	<i>336</i>
8.19.1.	6 dB BANDWIDTH	336
8.19.2.	99% BANDWIDTH	344
8.19.3.	AVERAGE POWER	352
8.19.4.	OUTPUT POWER.....	353
8.19.5.	POWER SPECTRAL DENSITY.....	355
8.19.6.	OUT-OF-BAND EMISSIONS.....	363
8.20.	<i>802.11n 2Tx CDD MODE IN THE 2.4 GHZ BAND, CHAIN 1+2.....</i>	<i>378</i>
8.20.1.	6 dB BANDWIDTH	378
8.20.2.	99% BANDWIDTH	386
8.20.3.	AVERAGE POWER	394
8.20.4.	OUTPUT POWER.....	395
8.20.5.	POWER SPECTRAL DENSITY.....	397
8.20.6.	OUT-OF-BAND EMISSIONS.....	405
8.21.	<i>802.11n HT20 3Tx CDD MODE IN THE 2.4 GHz BAND</i>	<i>420</i>
8.21.1.	6 dB BANDWIDTH	420
8.21.2.	99% BANDWIDTH	433
8.21.3.	AVERAGE POWER	446
8.21.4.	OUTPUT POWER.....	447
8.21.5.	POWER SPECTRAL DENSITY.....	449
8.21.6.	OUT-OF-BAND EMISSIONS.....	462
8.22.	<i>802.11n 2Tx BEAM FORMING MODE IN THE 2.4 GHZ BAND, CHAIN 0+1.....</i>	<i>487</i>
8.22.1.	6 dB BANDWIDTH	487
8.22.2.	99% BANDWIDTH	495
8.22.3.	AVERAGE POWER	503
8.22.4.	OUTPUT POWER.....	504
8.22.5.	POWER SPECTRAL DENSITY.....	506
8.22.6.	OUT-OF-BAND EMISSIONS.....	514
8.23.	<i>802.11n 2Tx BEAM FORMING MODE IN THE 2.4 GHZ BAND, CHAIN 0+2.....</i>	<i>529</i>
8.23.1.	6 dB BANDWIDTH	529
8.23.2.	99% BANDWIDTH	537
8.23.3.	AVERAGE POWER	545
8.23.4.	OUTPUT POWER.....	546

8.23.5.	POWER SPECTRAL DENSITY.....	548
8.23.6.	OUT-OF-BAND EMISSIONS.....	556
8.24.	<i>802.11n 2Tx BEAM FORMING MODE IN THE 2.4 GHZ BAND, CHAIN 1+2.....</i>	<i>571</i>
8.24.1.	6 dB BANDWIDTH	571
8.24.2.	99% BANDWIDTH	579
8.24.3.	AVERAGE POWER	587
8.24.4.	OUTPUT POWER.....	588
8.24.5.	POWER SPECTRAL DENSITY.....	590
8.24.6.	OUT-OF-BAND EMISSIONS.....	598
8.25.	<i>802.11n HT20 3Tx BEAM FORMING MODE IN THE 2.4 GHz BAND</i>	<i>613</i>
8.25.1.	6 dB BANDWIDTH	613
8.25.2.	99% BANDWIDTH	628
8.25.3.	AVERAGE POWER	643
8.25.4.	OUTPUT POWER.....	644
8.25.5.	POWER SPECTRAL DENSITY.....	646
8.25.6.	OUT-OF-BAND EMISSIONS.....	661
9.	RADIATED TEST RESULTS.....	689
9.1.	LIMITS AND PROCEDURE	689
9.2.	<i>802.11b 1Tx MODE IN THE 2.4 GHz BAND CHAIN 0</i>	<i>690</i>
9.3.	<i>802.11b 1Tx MODE IN THE 2.4 GHz BAND CHAIN 1</i>	<i>698</i>
9.4.	<i>802.11b 1Tx MODE IN THE 2.4 GHz BAND CHAIN 2</i>	<i>706</i>
9.5.	<i>802.11b 2Tx MODE IN THE 2.4 GHz BAND CHAIN 0+1</i>	<i>714</i>
9.6.	<i>802.11b 2Tx MODE IN THE 2.4 GHz BAND CHAIN 0+2</i>	<i>720</i>
9.7.	<i>802.11b 2Tx MODE IN THE 2.4 GHz BAND CHAIN 1+2</i>	<i>726</i>
9.8.	<i>802.11b 3Tx MODE IN THE 2.4 GHz BAND</i>	<i>732</i>
9.8.1.	RESTRICTED BANDEGE.....	732
9.8.2.	HARMONICS AND SPURIOUS EMISSIONS	738
9.9.	<i>802.11n HT20 1Tx MODE IN THE 2.4 GHz BAND CHAIN 0</i>	<i>746</i>
9.10.	<i>802.11n HT20 1Tx MODE IN THE 2.4 GHz BAND CHAIN 1</i>	<i>758</i>
9.11.	<i>802.11n HT20 1Tx MODE IN THE 2.4 GHz BAND CHAIN 2</i>	<i>770</i>
9.12.	<i>802.11n HT20 2Tx CDD MODE IN THE 2.4 GHz BAND CHAIN 0+1</i>	<i>782</i>
9.13.	<i>802.11n HT20 2Tx CDD MODE IN THE 2.4 GHz BAND CHAIN 0+2</i>	<i>794</i>
9.14.	<i>802.11n HT20 2Tx CDD MODE IN THE 2.4 GHz BAND CHAIN 1+2</i>	<i>806</i>
9.15.	<i>802.11n HT20 3Tx CDD MODE IN THE 2.4 GHz BAND</i>	<i>818</i>
9.15.1.	RESTRICTED BANDEGE	818
9.15.2.	HARMONICS AND SPURIOUS EMISSIONS.....	832
9.16.	<i>802.11ac VHT20 2Tx BEAM FORMING MODE IN THE 2.4 GHz BAND CHAIN 0+1</i> <i>848</i>	
9.17.	<i>802.11ac VHT20 2Tx BEAM FORMING MODE IN THE 2.4 GHz BAND CHAIN 0+2</i> <i>860</i>	
9.18.	<i>802.11ac VHT20 2Tx BEAM FORMING MODE IN THE 2.4 GHz BAND CHAIN 1+2</i> <i>872</i>	

9.19.	802.11ac VHT20 3Tx BF MODE IN THE 2.4 GHz BAND	884
9.19.1.	RESTRICTED BANDEDGE	884
9.19.2.	HARMONICS AND SPURIOUS EMISSIONS.....	900
9.20.	WORST-CASE BELOW 1 GHz	918
9.21.	WORST-CASE 18 to 26 GHz	920
10.	AC POWER LINE CONDUCTED EMISSIONS	922
10.1.	EUT POWERED BY AC/DC ADAPTER VIA USB CABLE.....	923
11.	SETUP PHOTOS	925

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: APPLE, INC.
1 INFINITE LOOP
CUPERTINO, CA 95014, U.S.A.

EUT DESCRIPTION: PORTABLE COMPUTER

MODEL: A1707

SERIAL NUMBER: C02S3004H7CF (CONDUCTED) &
C02S602SH79J (RADIATED)

DATE TESTED: AUGUST 2, 2016 – SEPTEMBER 21, 2016


APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass
INDUSTRY CANADA RSS-247 Issue 1	Pass
INDUSTRY CANADA RSS-GEN Issue 4	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:

Prepared By:



MENGISTU MEKURIA
PROJECT LEADER
UL VERIFICATION SERVICES INC.

TRI PHAM
EMC LAB TECHNICIAN
UL VERIFICATION SERVICES INC.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, KDB 558074 D01 v03r05, ANSI C63.10-2013, RSS-GEN Issue 4, and RSS-247 Issue 1.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
☐ Chamber A	☒ Chamber D
☐ Chamber B	☒ Chamber E
☐ Chamber C	☐ Chamber F
	☐ Chamber G
	☒ Chamber H

The above test sites and facilities are covered under FCC Test Firm Registration # 208313. Chambers A through H are covered under Industry Canada company address code 2324B with site numbers 2324B -1 through 2324B-8, respectively.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned}\text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamplifier Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m}\end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 9KHz to 0.15 MHz	3.84 dB
Conducted Disturbance, 0.15 to 30 MHz	3.65 dB
Radiated Disturbance, 9KHz to 30 MHz	3.15 dB
Radiated Disturbance, 30 to 1000 MHz	5.36 dB
Radiated Disturbance, 1000 to 18000 MHz	4.32 dB
Radiated Disturbance, 18000 to 26000 MHz	4.45 dB
Radiated Disturbance, 26000 to 40000 MHz	5.24 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a portable computer with Bluetooth and WLAN Radios (AC 80 MHz Beam Forming).

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2412 - 2472	802.11b 1TX	19.55	90.16
2412 - 2467	802.11b 2TX	22.62	182.81
2412 - 2467	802.11b 3TX	24.34	271.64
2412 - 2472	802.11g 1TX	Covered by HT20 1TX	
2412 - 2467	802.11g 2TX	Covered by HT20 2TX CDD	
2412 - 2467	802.11g 3TX	Covered by HT20 3TX CDD	
2412 - 2472	802.11n HT20 1TX	19.69	93.11
2412 - 2467	802.11n HT20 2TX CDD	22.97	198.15
2412 - 2467	802.11n HT20 3TX CDD	24.33	271.02
2412 - 2467	802.11ac VHT20 2TX Beam Forming	22.45	175.79
2412 - 2467	802.11ac VHT20 3TX Beam Forming	24.45	278.61

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

Frequency Band (GHz)	Antenna Gain (dBi)		
	Chain 0	Chain 1	Chain 2
2.4	2.1	3.3	2.1

5.4. SOFTWARE AND FIRMWARE

The firmware version installed in the EUT during testing was 7.21.170.1.

5.5. WORST-CASE CONFIGURATION AND MODE

For below 1G, above 18G radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

For g and HT20 modes, radiated harmonics spurious and power line conducted emissions were performed with the EUT set at the CDD mode at highest power setting among the CDD/STBC/SDM/Beamforming modes as worst-case scenario.

EUT was investigated with and without AC Charger and the worst case was determined to be with charger. Therefore, all testing was performed with AC charger in normal use orientation as described by the manufacturer.

Worst-case data rates as provided by the client were:

802.11b mode: 1 Mbps
802.11g mode: 6 Mbps
802.11n HT20mode: MCS0

The following modes have the same target power and use the same modulation (OFDM). Therefore:

- 802.11g is covered by 802.11n HT20 1TX
- 802.11g 2TX is covered by 802.11n HT20 2TX CDD
- 802.11g 3TX is covered by 802.11n HT20 3TX CDD

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC/ DC Adapter	Apple Inc.	A1540	N/A	N/A

I/O CABLES (CONDUCTED TEST)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	Antenna	2	SMA	Un-Shielded	0.2	To Spectrum Analyzer
2	DC	1	Lightning	Un-Shielded	2	N/A

I/O CABLES (ABOVE 1G RADIATED TEST)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC	1	Lightning	Un-Shielded	2	N/A


I/O CABLES (BELOW 1G RADIATED AND AC POWER CONDUCTED TEST)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC	1	Lightning	Un-Shielded	2	NA
2	Audio	1	Jack	Un-Shielded	0.5	NA

TEST SETUP- CONDUCTED PORT

The EUT was tested connected to spectrum analyzer via antenna port. Test software exercised the EUT.


SETUP DIAGRAM

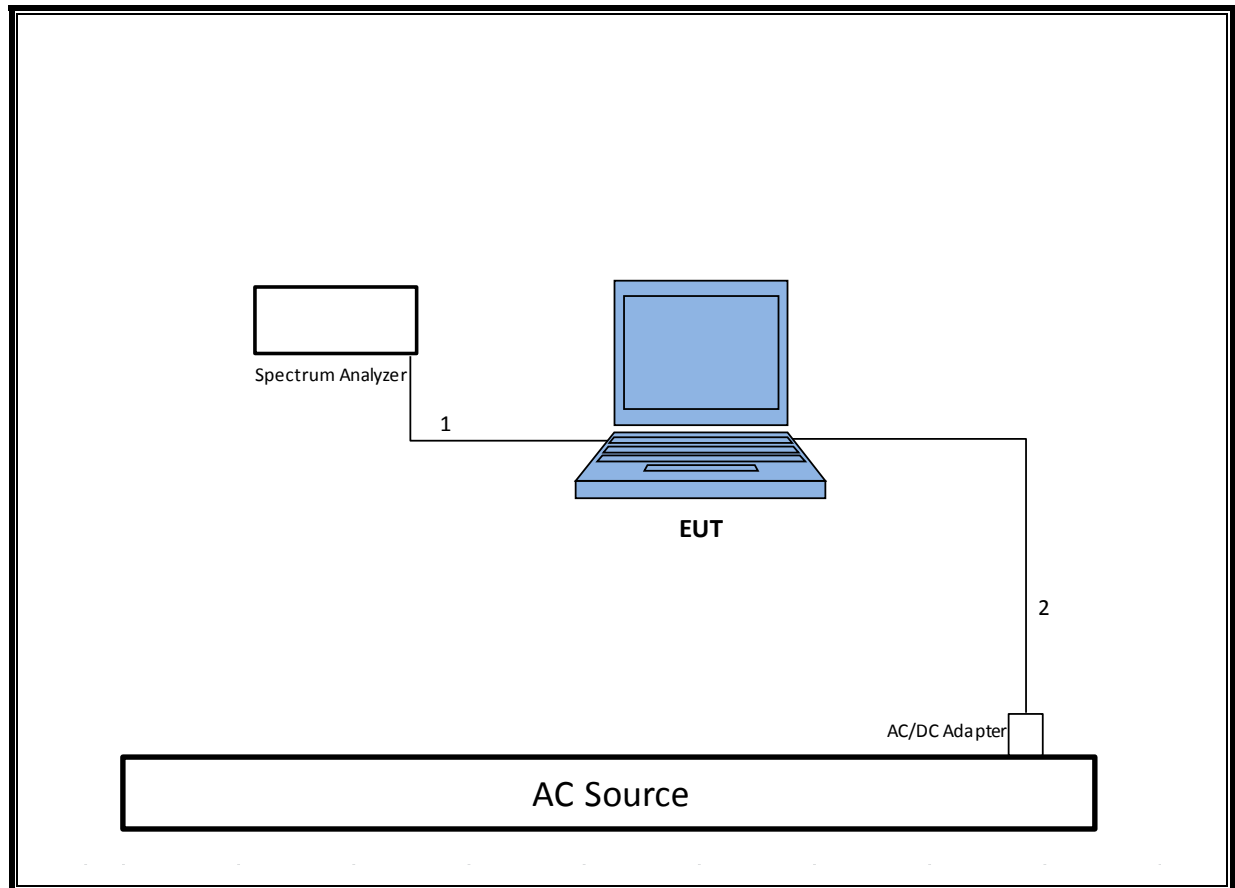

TEST SETUP- RADIATED- ABOVE 1 GHz

The EUT was powered by AC/DC adapter. Test software exercised the EUT.


SETUP DIAGRAM

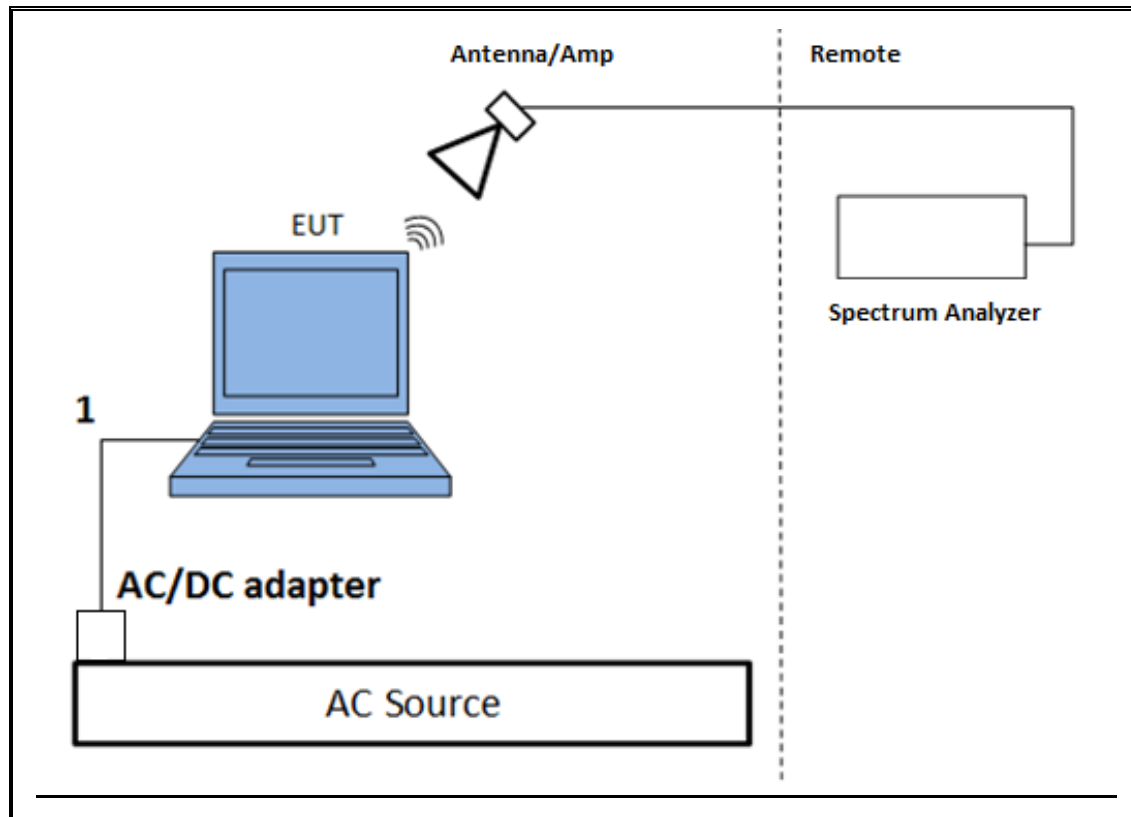

TEST SETUP- RADIATED- BELOW 1 GHz

The EUT was powered by AC/DC adapter and with earphone plugged in. Test software exercised the EUT.


SETUP DIAGRAM

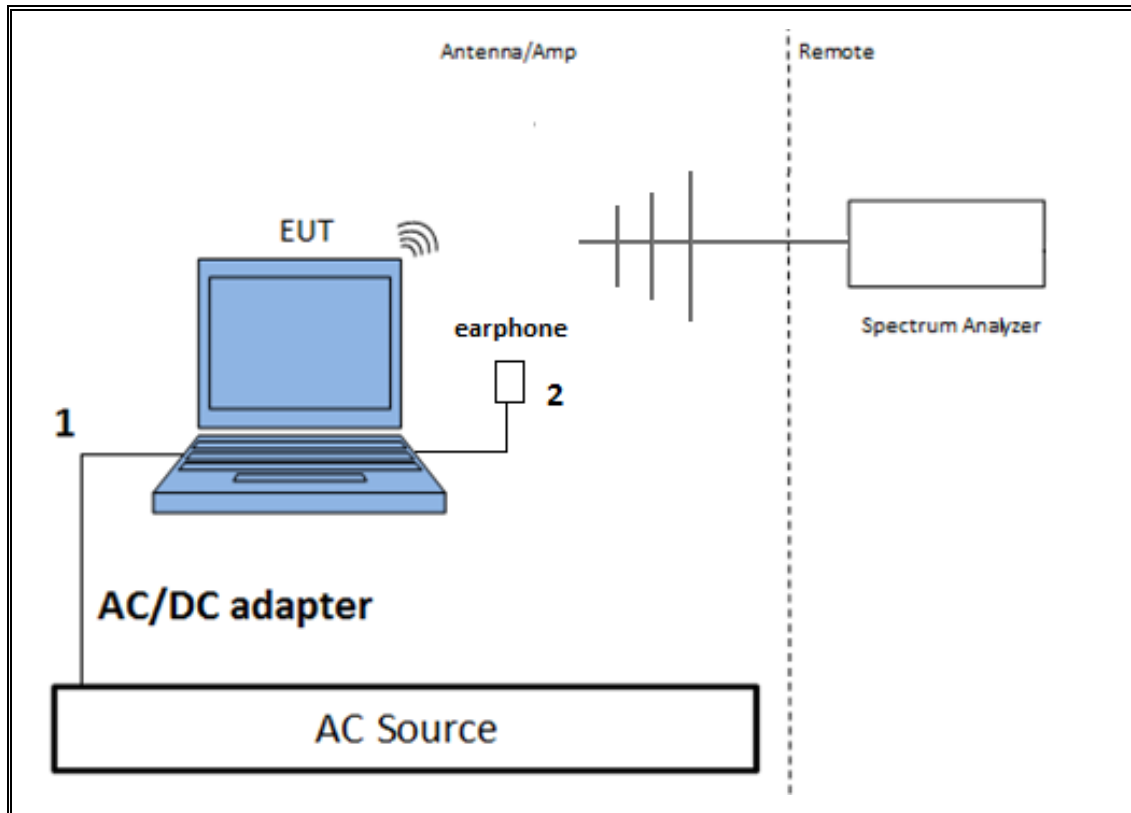

TEST SETUP- AC LINE CONDUCTED TESTS

The EUT was powered by AC/DC adapter and with earphone plugged in. Test software exercised the EUT.

SETUP DIAGRAM

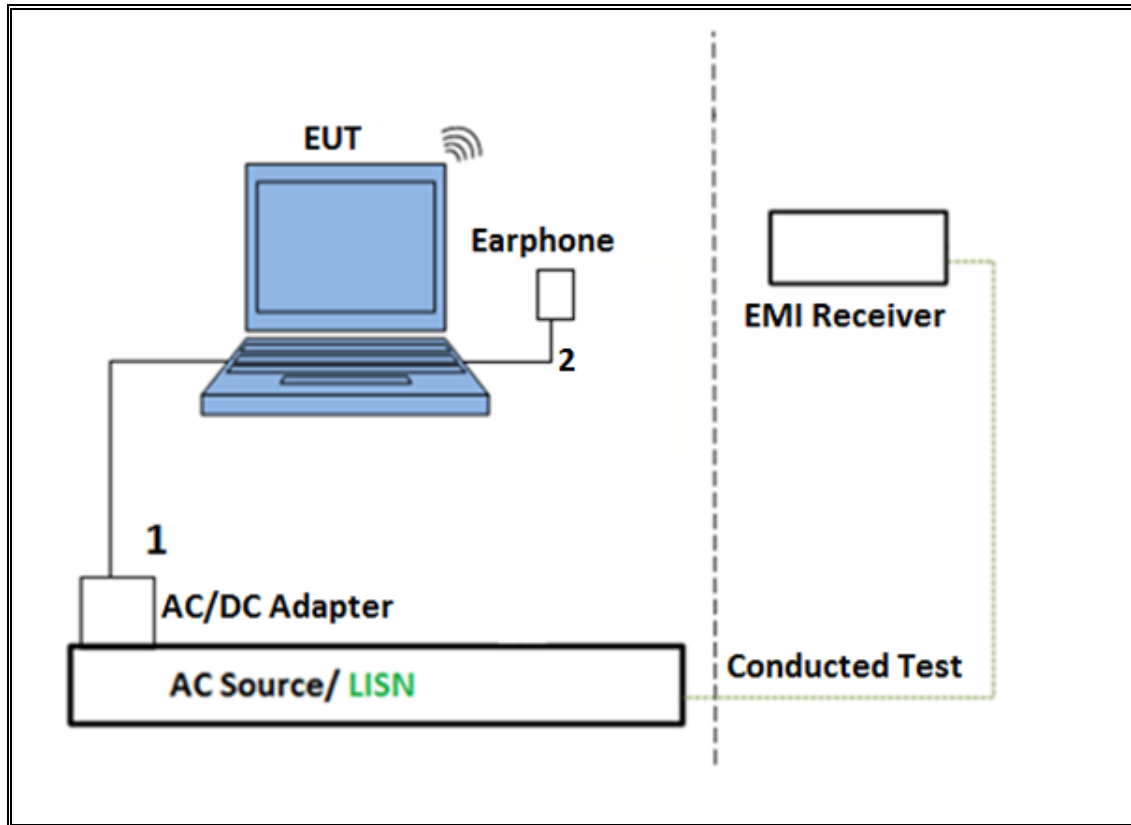

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	T Number	Cal Due
Antenna, Horn 1-18GHz	ETS Lindgren	3117	T120	4/5/2017
Antenna, Broadband Hybrid, 30MHz to 2000MHz	Sunol Sciences	JB3	T122	1/29/2017
Amplifier, 10KHz to 1GHz, 32dB	Sonoma	310N	T173	6/17/2017
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent	N9030A	T341	10/14/2016
Antenna, Horn 1-18GHz	ETS Lindgren	3117	T862	4/18/2017
Antenna, Broadband Hybrid, 30MHz to 2000MHz	Sunol Sciences	JB3	T899	5/26/2017
Amplifier, 1 - 18GHz	Miteq	AFS42-00101800-25-S-42	T491	5/31/2017
Amplifier, 10KHz to 1GHz, 32dB	Sonoma	310N	T834	6/17/2017
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent	N9030A	T905	6/21/2017
Power Meter, P-series single channel	Agilent	N1911A	T1271	7/8/2017
Power Sensor, P - series, 50MHz to 18GHz, Wideband	Agilent	N1921A	T1228	6/20/2017
Antenna, Horn 18 to 26.5GHz	ARA	MWH-1826	T447	6/16/2017
***Spectrum Analyzer, 40 GHz	Agilent	8564E	T106	9/7/2017
Amplifier, 1 to 26.5GHz, 23.5dB Gain minimum	Keysight	8449B	T402	7/5/2017
AC Line Conducted				
EMI Test Receiver 9KHz-7GHz	Rohde & Schwarz	ESCI7	T1436	12/19/2016
LISN for Conducted Emissions CISPR-16	Fischer	50/250-25-2-01	T1310	6/8/2017
**AC Source	Shaffner	NSG 1007	T134	9/11/2016
UL SOFTWARE				
* Radiated Software	UL	UL EMC	Ver 9.5, June 24, 2015	
* Conducted Software	UL	UL EMC	Ver 4.0, January 11, 2016	
* AC Line Conducted Software	UL	UL EMC	Ver 9.5, May 26, 2015	

Note: * indicates automation software version used in the compliance certification testing

** equipment was used before calibration due date.

*** equipment was used after calibration.

7. MEASUREMENT METHODS

6 dB BW: KDB 558074 D01 v03r05, Section 8.1.

Output Power: KDB 558074 D01 v03r05, Section 9.1.2.

Power Spectral Density: KDB 558074 D01 v03r05, Section 10.2.

Out-of-band emissions in non-restricted bands: KDB 558074 D01 v03r05, Section 11.0.

Out-of-band emissions in restricted bands: KDB 558074 D01 v03r05, Section 12.1.

Band-edge: KDB 558074 D01 v03r05, Section 12.1.

8. ANTENNA PORT TEST RESULTS

ON TIME AND DUTY CYCLE

LIMITS

None; for reporting purposes only.



PROCEDURE



KDB 558074 Zero-Span Spectrum Analyzer Method.



ON TIME AND DUTY CYCLE RESULTS



Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/B Minimum VBW (kHz)
2.4GHz Band						
802.11b 1TX	1.000	1.000	1.000	100.00%	0.00	0.010
802.11b 2TX CDD	1.000	1.000	1.000	100.00%	0.00	0.010
802.11b 3TX CDD	1.000	1.000	1.000	100.00%	0.00	0.010
802.11n HT20 1TX	1.920	1.941	0.989	98.92%	0.00	0.010
802.11n HT20 2TX CDD	1.920	1.941	0.989	98.92%	0.00	0.010
802.11n HT20 3TX CDD	1.921	1.940	0.990	99.02%	0.00	0.010
802.11ac VHT20 2TX Beam Forming	3.824	3.928	0.974	97.35%	0.12	0.262
802.11ac VHT20 3TX Beam Forming	3.856	3.960	0.974	97.37%	0.12	0.259

DUTY CYCLE PLOTS

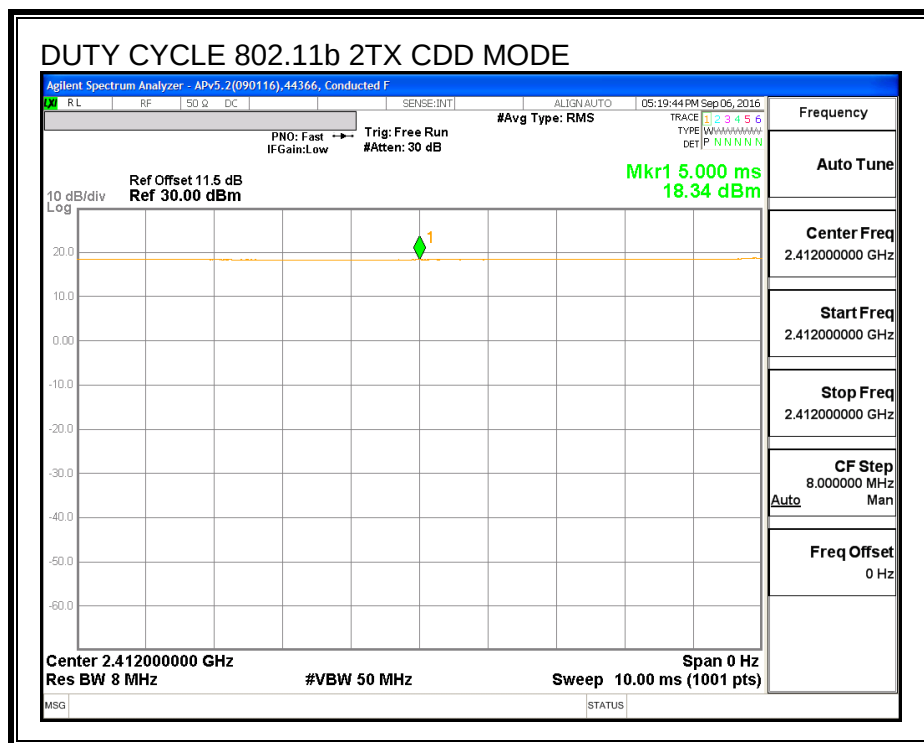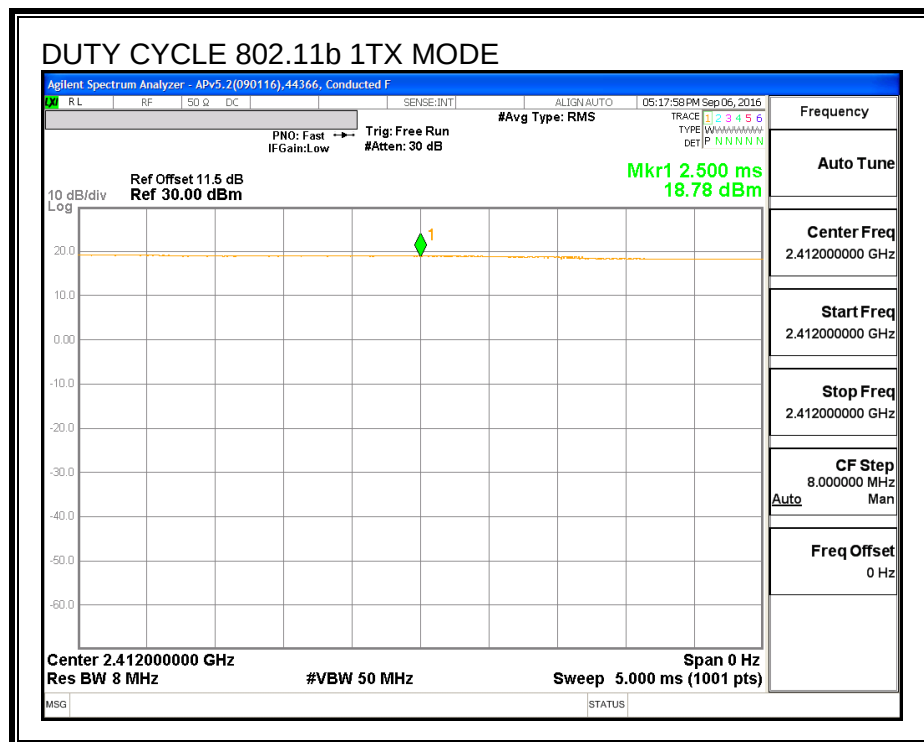

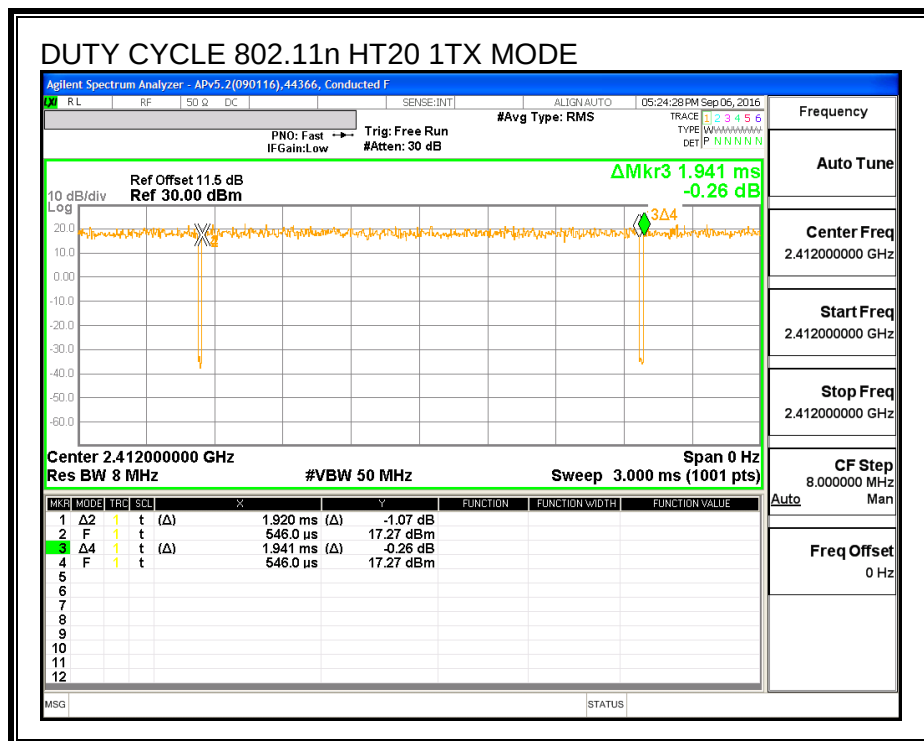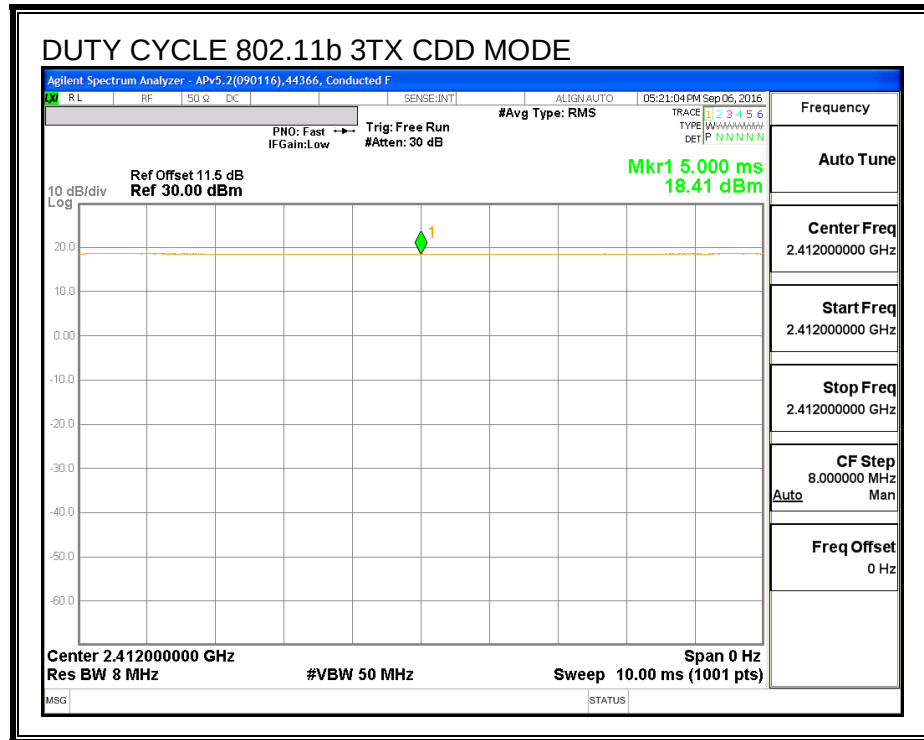

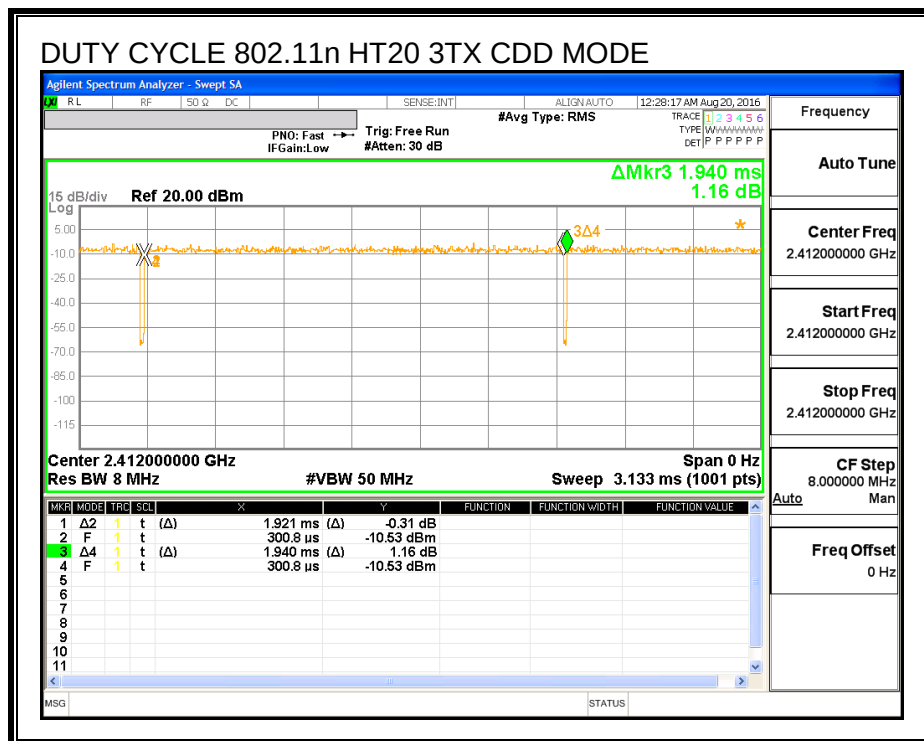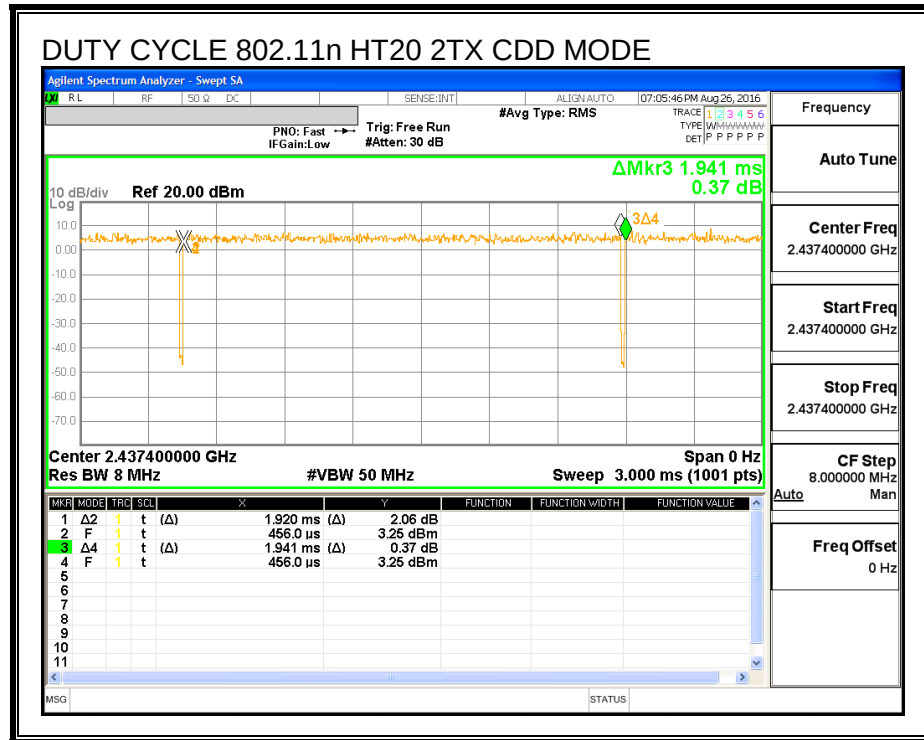

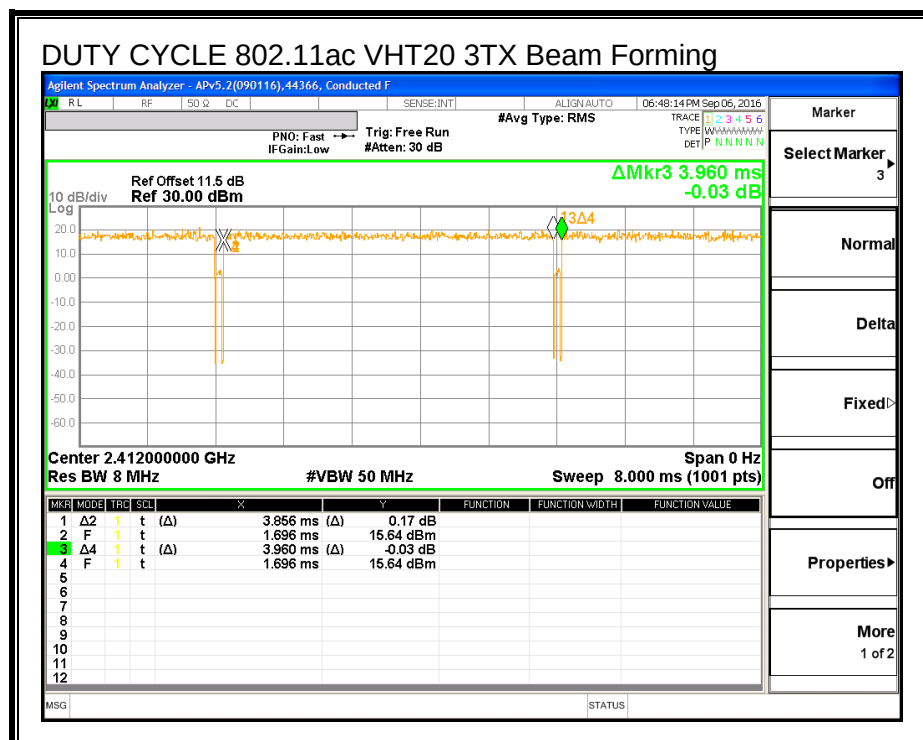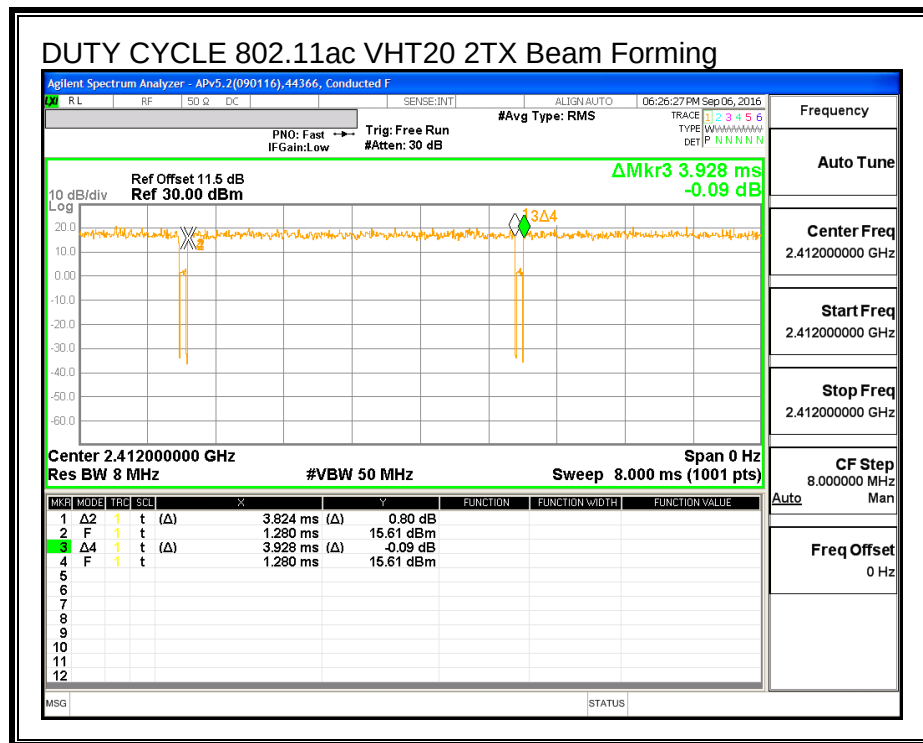

8.1. 802.11b SISO MODE IN THE 2.4 GHZ BAND, CHAIN 0

8.1.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)



IC RSS-247 (5.2) (1)



The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2412	8.554	0.5
Mid	2437	8.541	0.5
High_11	2462	9.058	0.5
High_12	2467	9.072	0.5
High_13	2472	8.125	0.5

6 dB BANDWIDTH

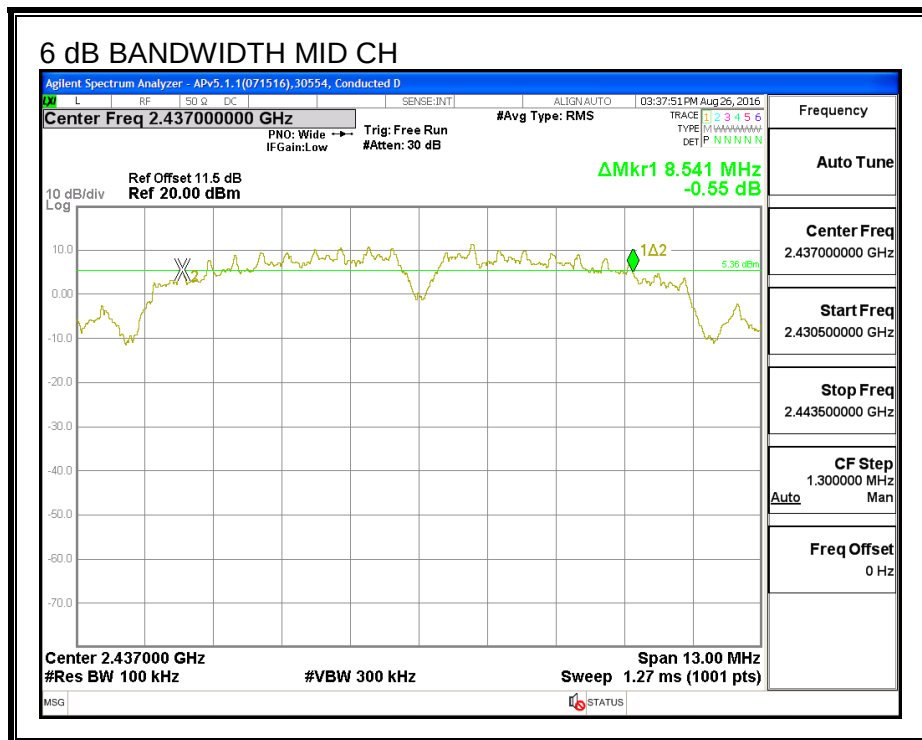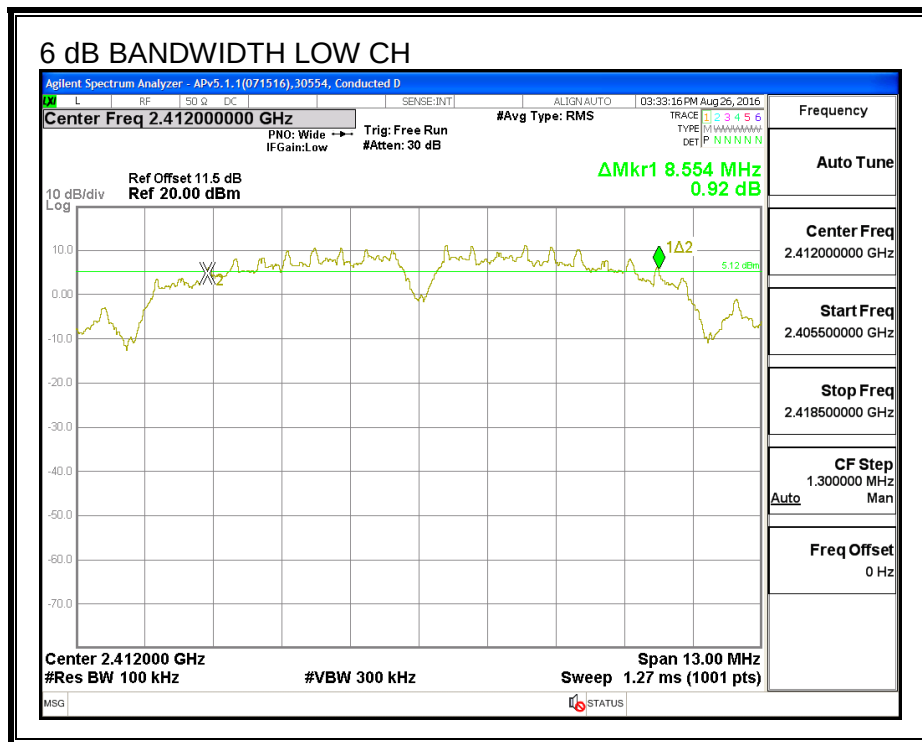

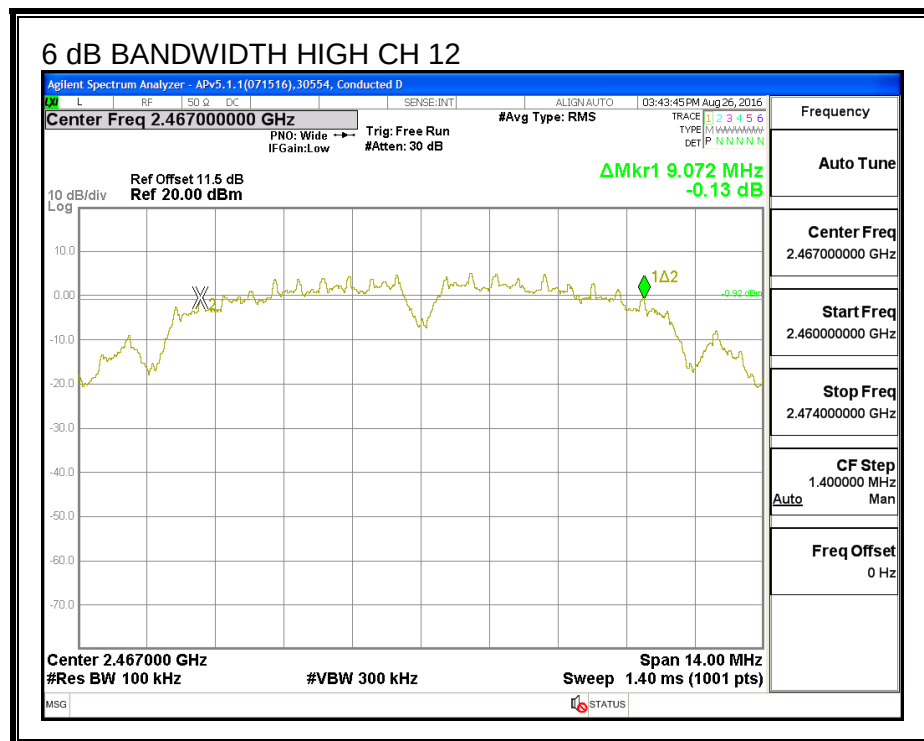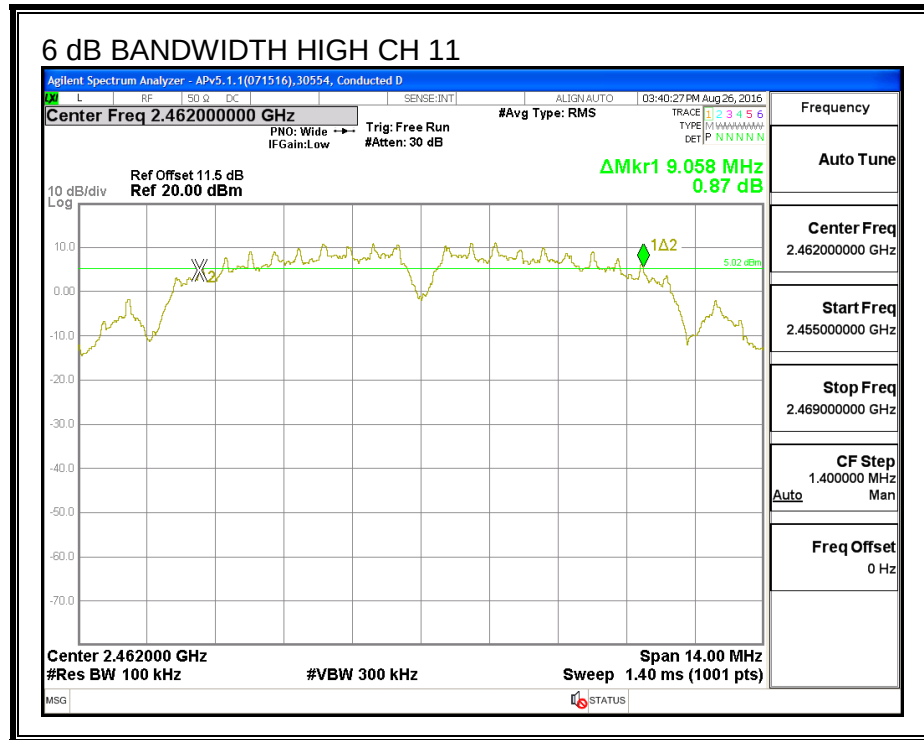



8.1.2. 99% BANDWIDTH



LIMITS



None; for reporting purposes only.


RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	11.077
Mid	2437	11.299
High_11	2462	12.026
High_12	2467	11.327
High_13	2472	11.231

99% BANDWIDTH

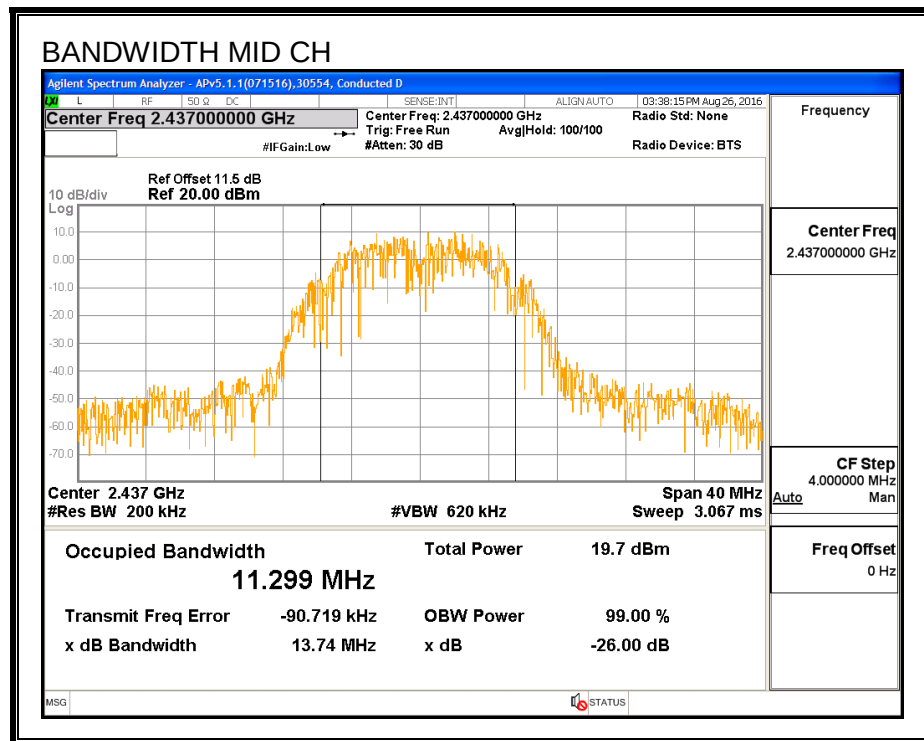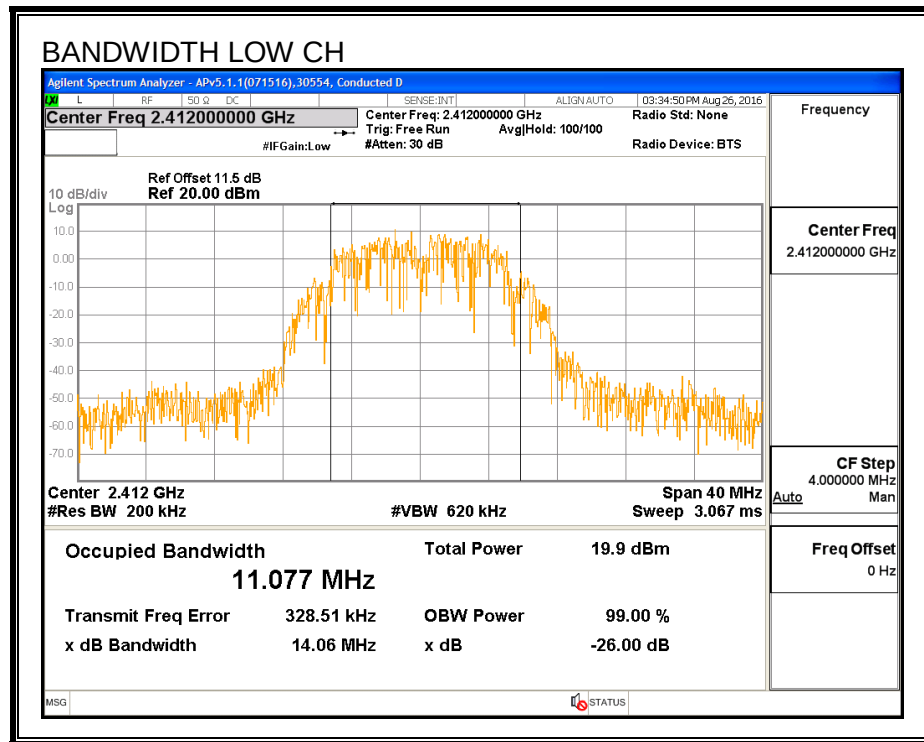

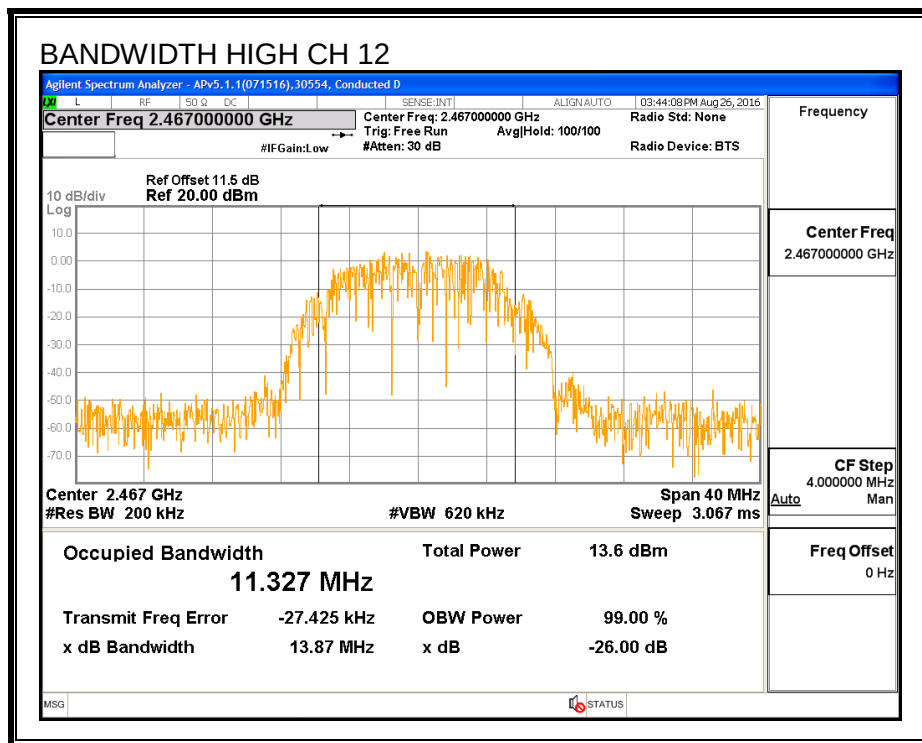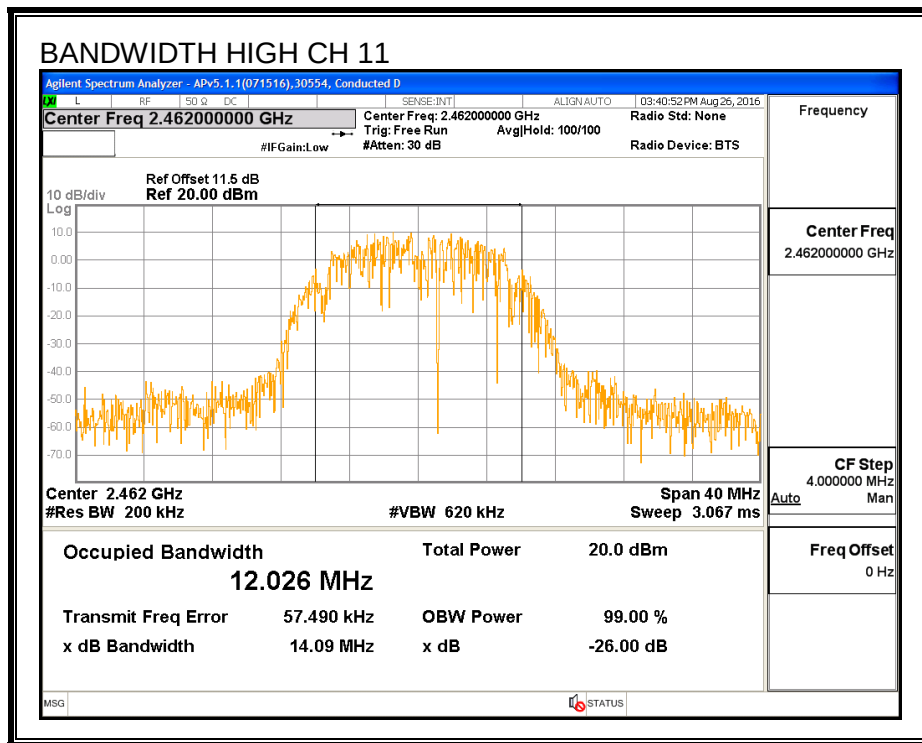

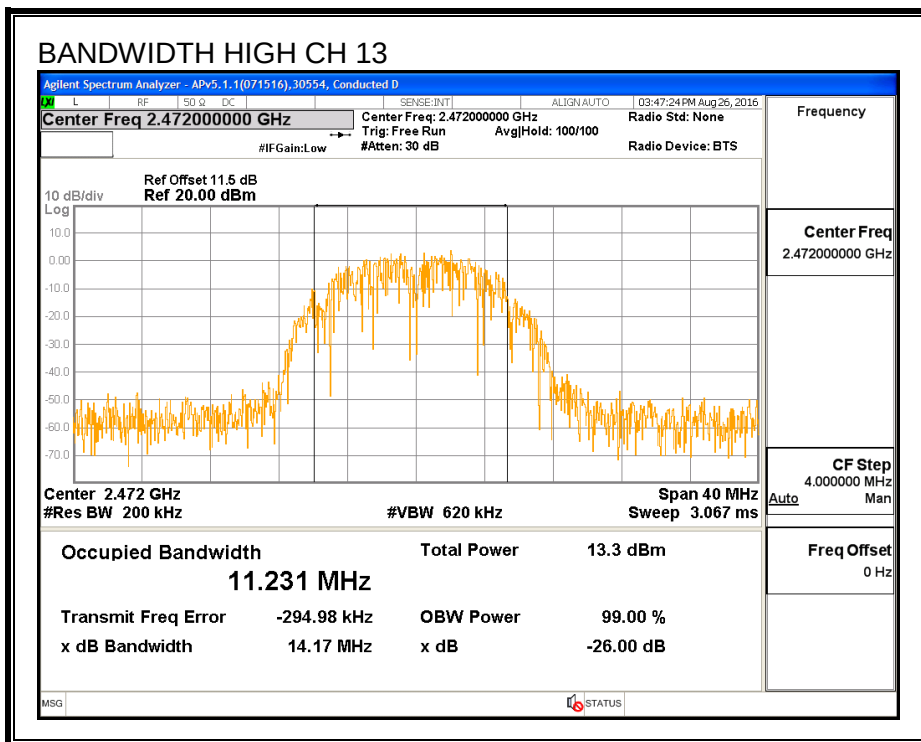

8.1.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	Power (dBm)
Low	2412	16.43
Mid	2437	16.38
High_11	2462	14.98
High_12	2467	12.96
High_13	2472	11.93

8.1.4. OUTPUT POWER

LIMITS

FCC §15.247

IC RSS-247 (5.4) (4)

For systems using digital modulation in the 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Max Power (dBm)
Low	2412	2.1	30.00	30	36	30.00
Mid	2437	2.1	30.00	30	36	30.00
High_11	2462	2.1	30.00	30	36	30.00
High_12	2467	2.1	30.00	30	36	30.00
High_13	2472	2.1	30.00	30	36	30.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power
--------------------	------	--

Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Margin (dB)
Low	2412	19.64	19.64	30.00	-10.36
Mid	2437	19.43	19.43	30.00	-10.57
High_11	2462	18.10	18.10	30.00	-11.90
High_12	2467	16.08	16.08	30.00	-13.92
High_13	2472	15.03	15.03	30.00	-14.97

8.1.5. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247

IC RSS-247 (5.2) (2)

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 KHz band during any time interval of continuous transmissions.



RESULTS



Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---


PSD Results

Channel	Frequency (MHz)	Meas (dBm)	Total Corr'd PSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-6.57	-6.57	8.0	-14.6
Mid	2437	-6.47	-6.47	8.0	-14.5
High_11	2462	-8.05	-8.05	8.0	-16.1
High_12	2467	-10.59	-10.59	8.0	-18.6
High_13	2472	-13.63	-13.63	8.0	-21.6

PSD

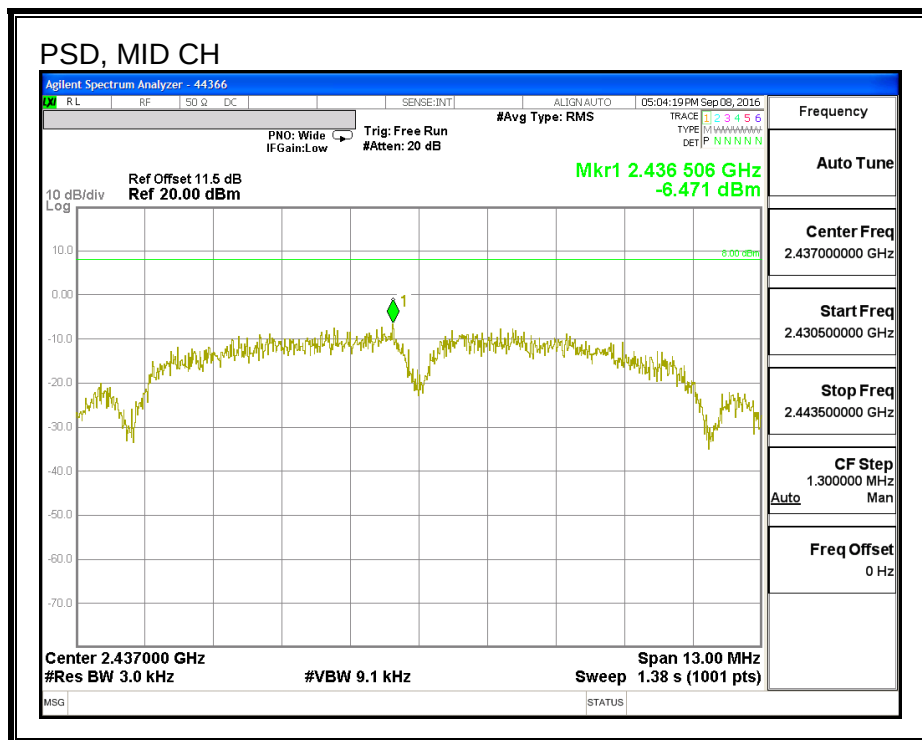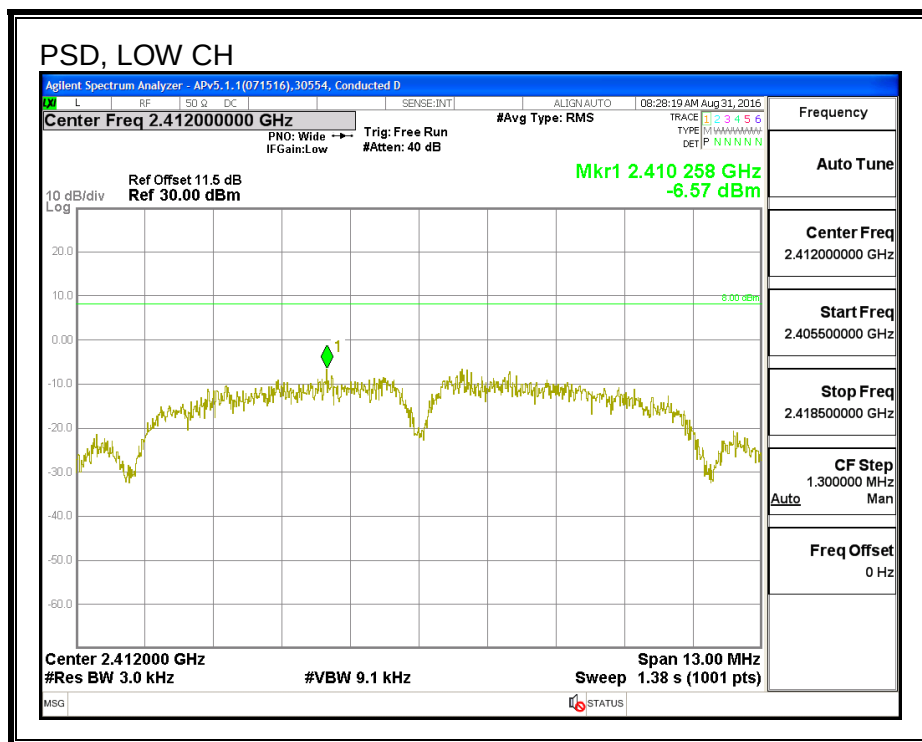

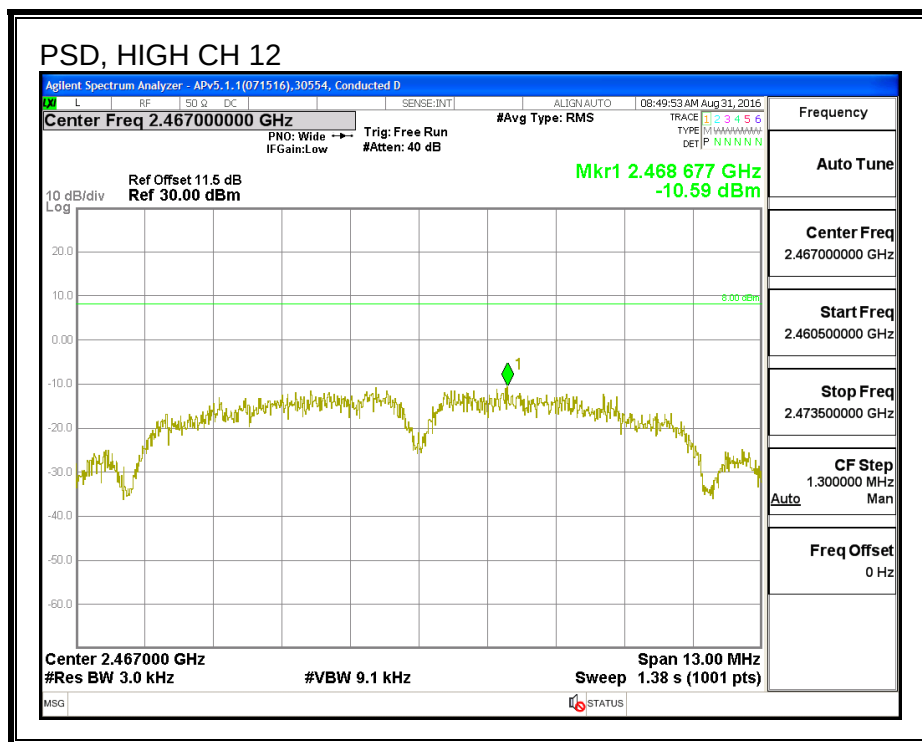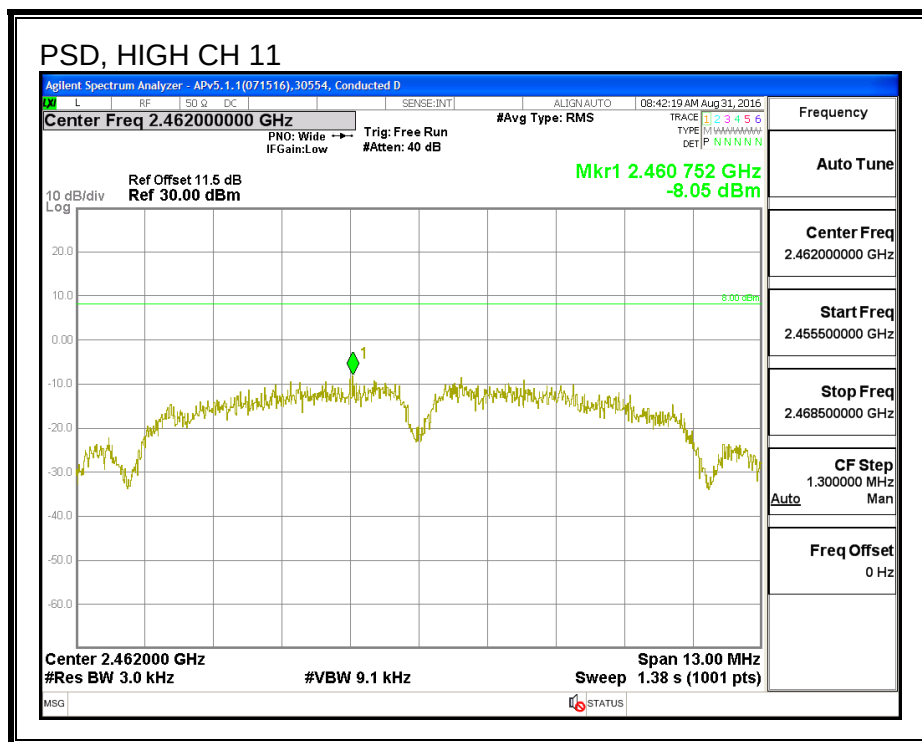

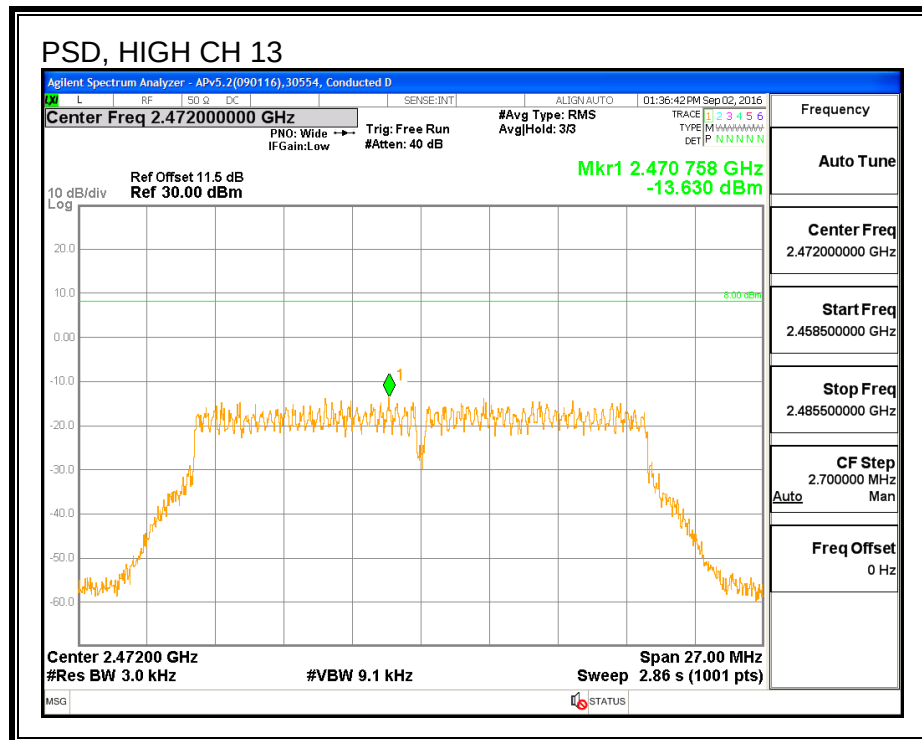

8.1.6. OUT-OF-BAND EMISSIONS

LIMITS


FCC §15.247 (d)

IC RSS-247 (5.5)


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

RESULTS



LOW CHANNEL BANDEDGE

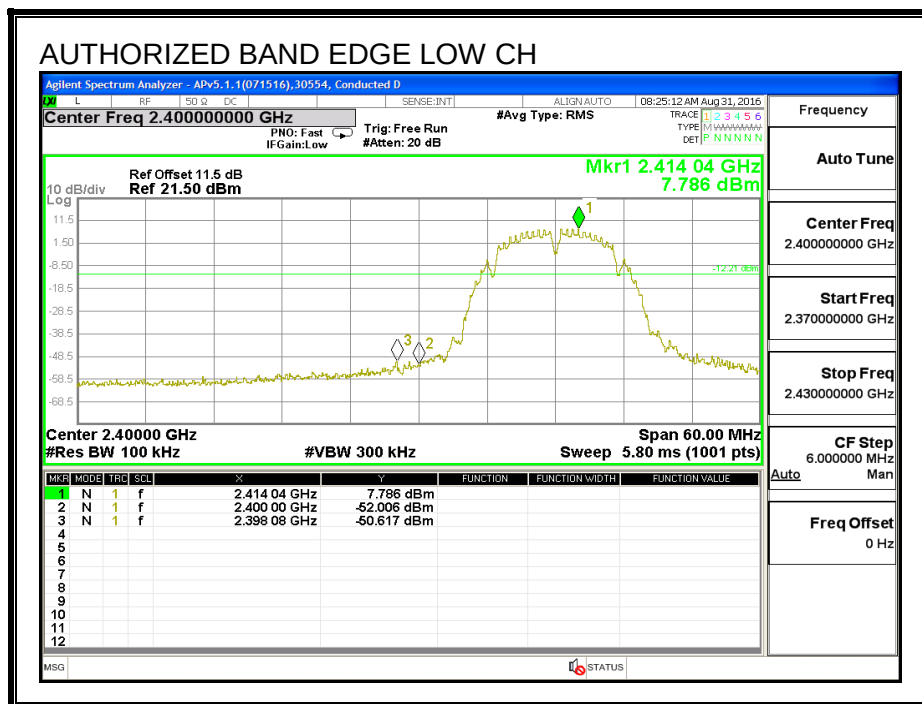


MID CHANNEL REFERENCE

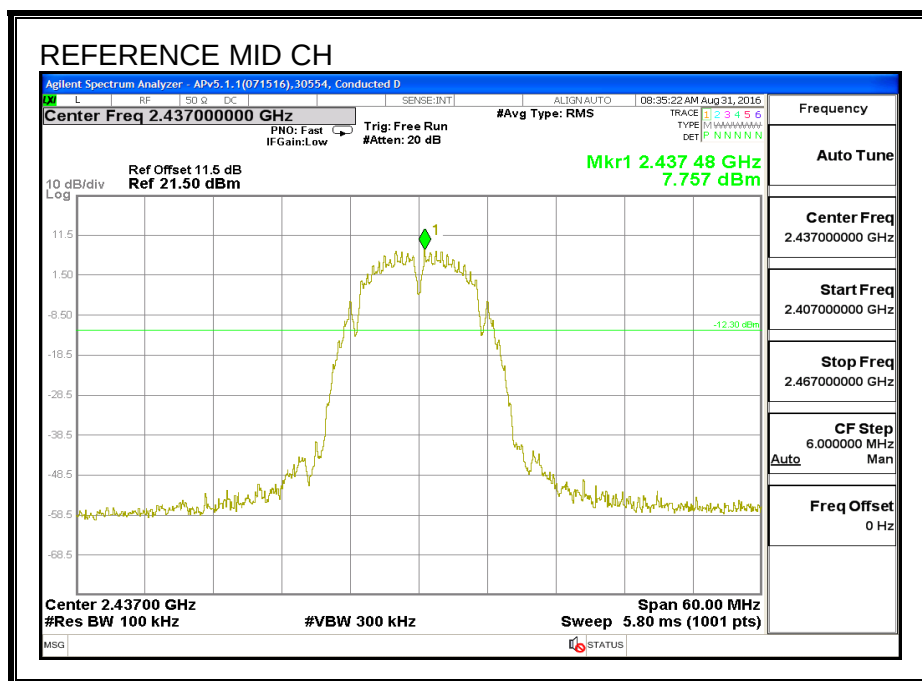




HIGH CHANNEL BANDEDGE

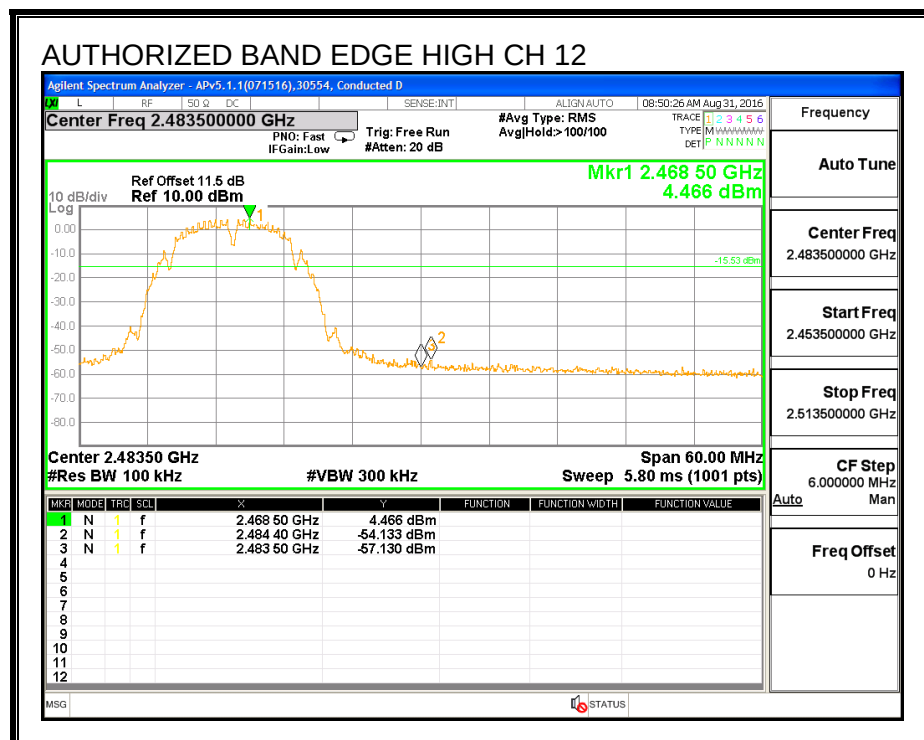
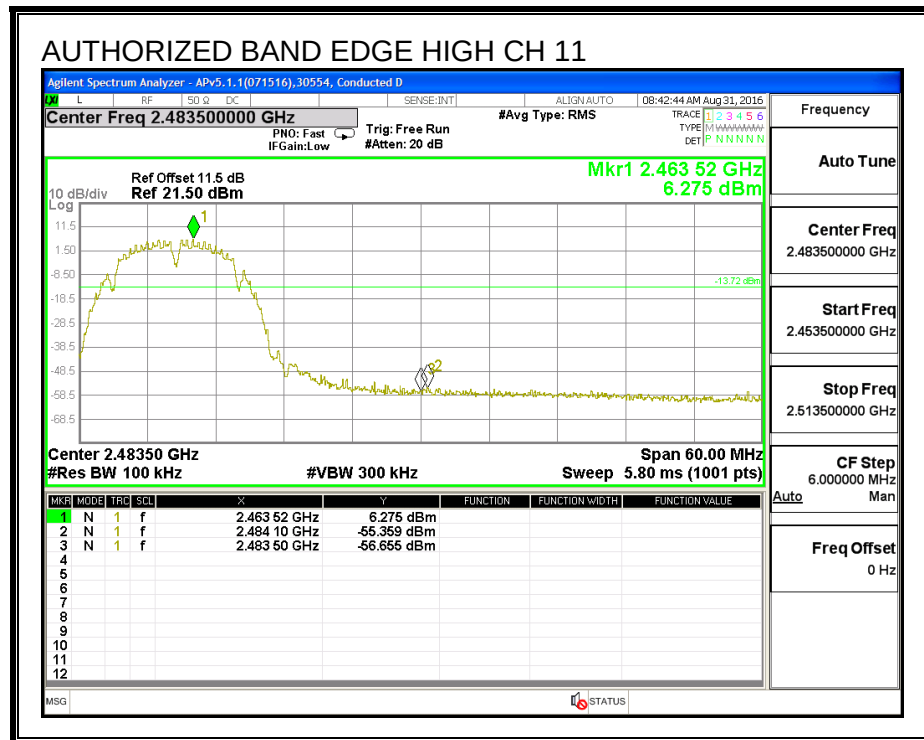


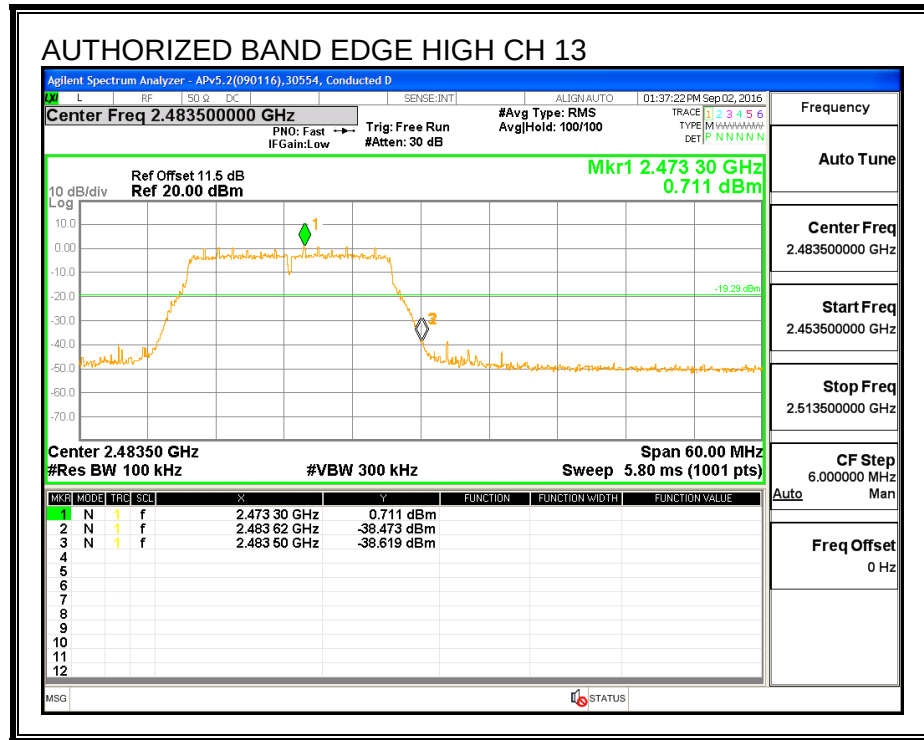

OUT-OF-BAND EMISSIONS

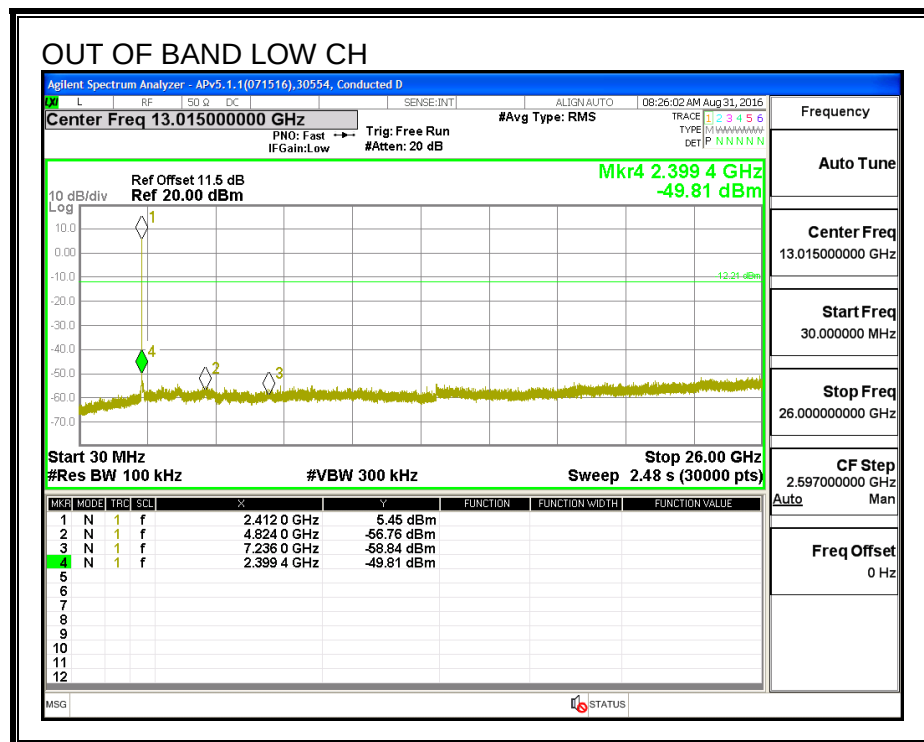

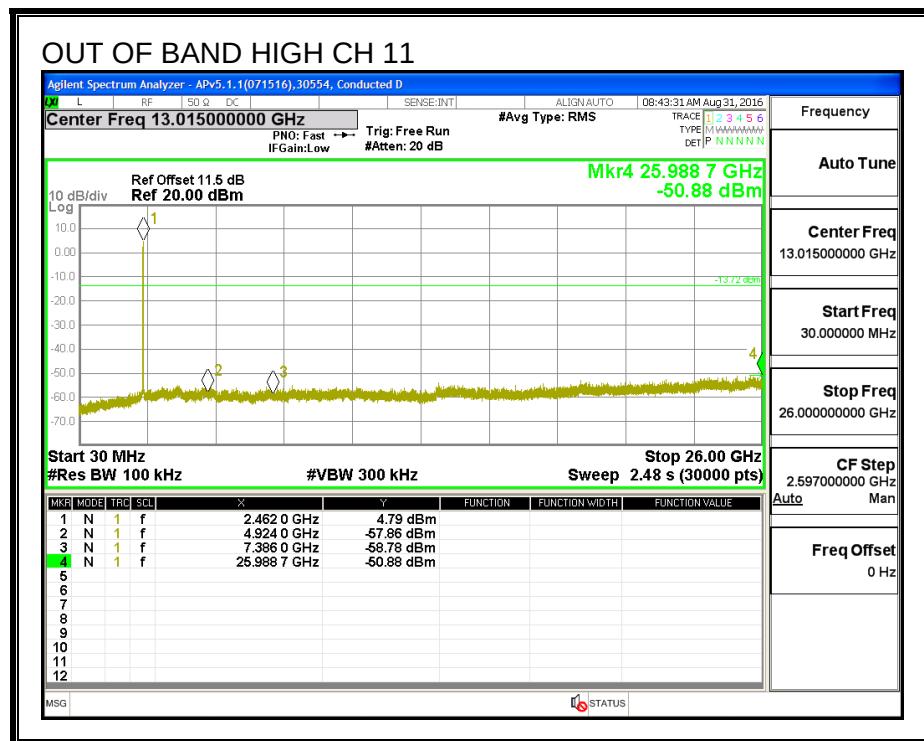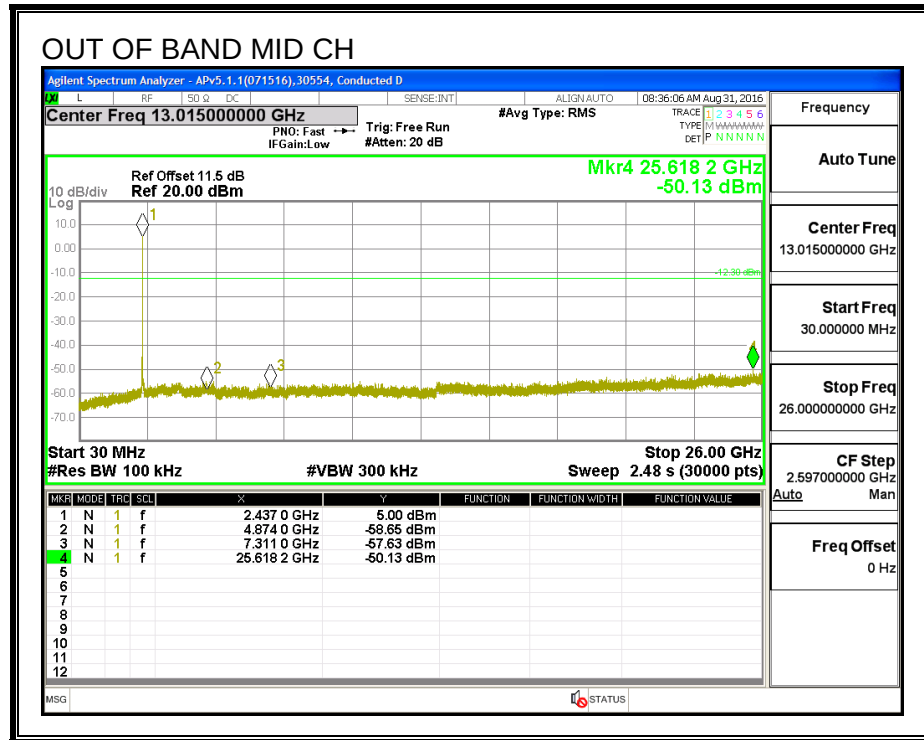

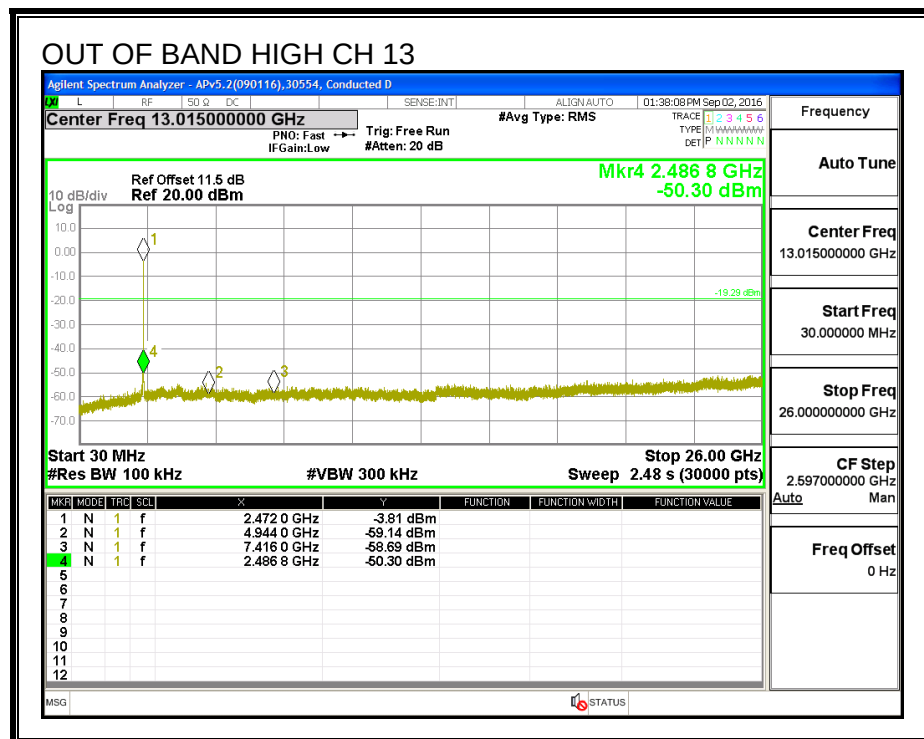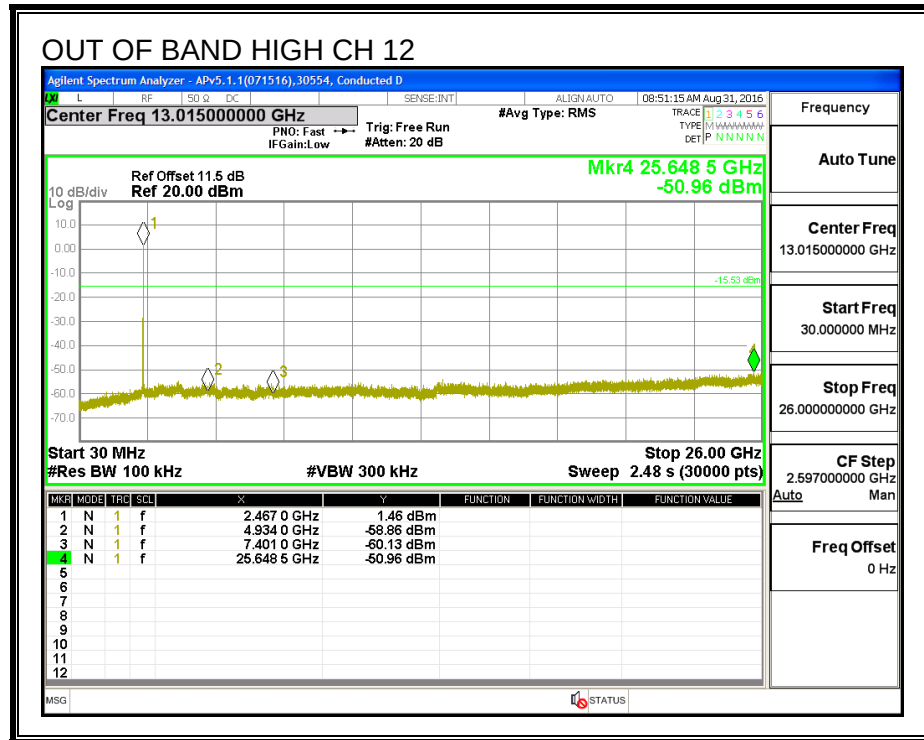

8.2. 802.11b SISO MODE IN THE 2.4 GHZ BAND, CHAIN 1

8.2.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)



IC RSS-247 (5.2) (1)



The minimum 6 dB bandwidth shall be at least 500 kHz.


RESULTS

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2412	8.606	0.5
Mid	2437	8.567	0.5
High_11	2462	9.058	0.5
High_12	2467	9.058	0.5
High_13	2472	8.567	0.5

6 dB BANDWIDTH

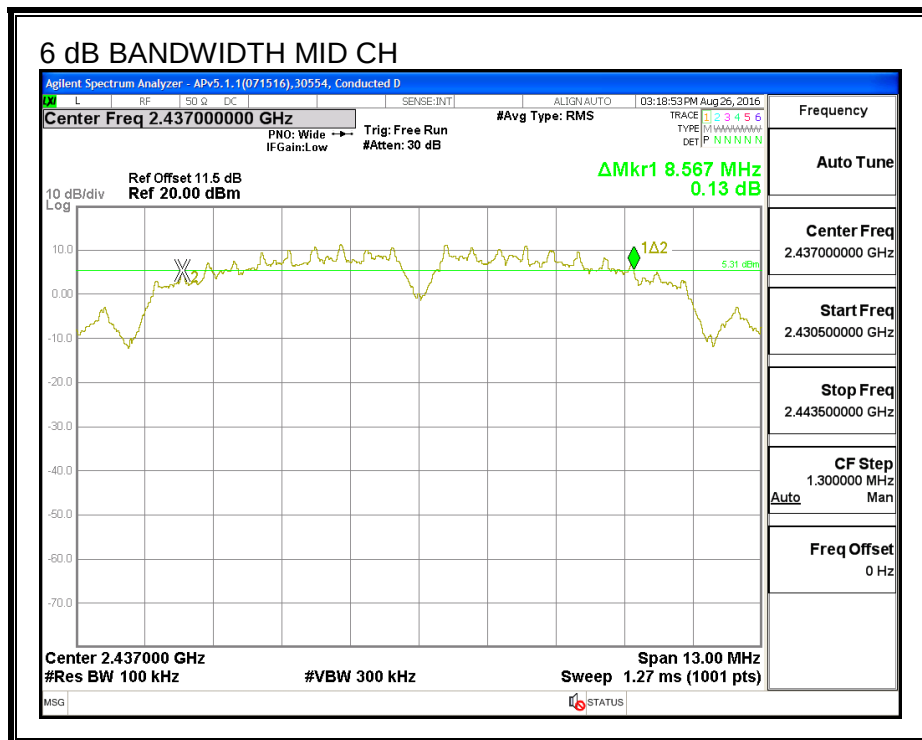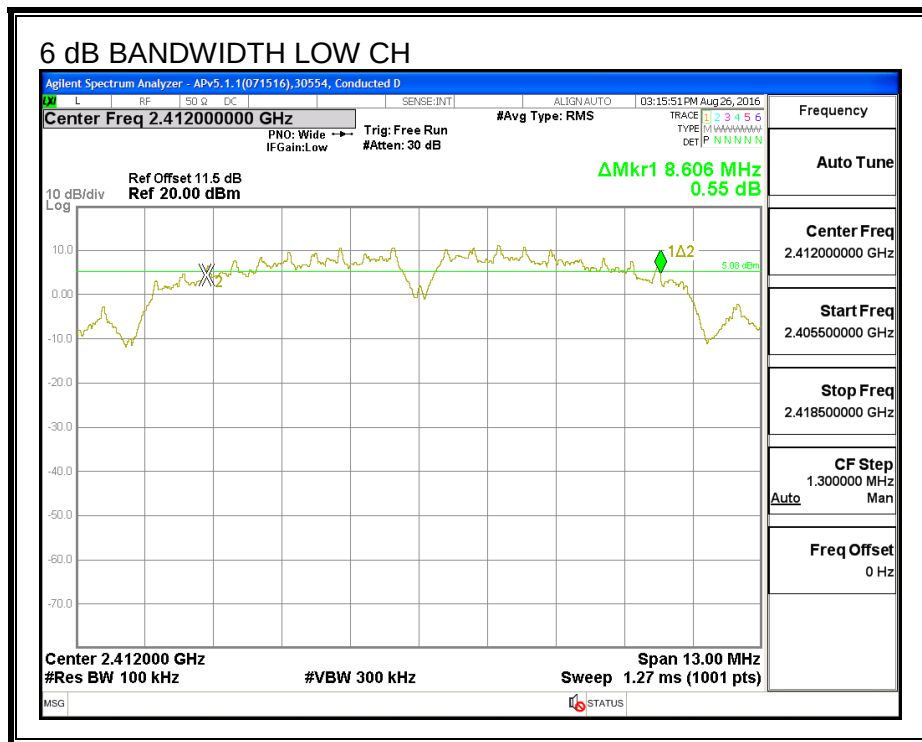

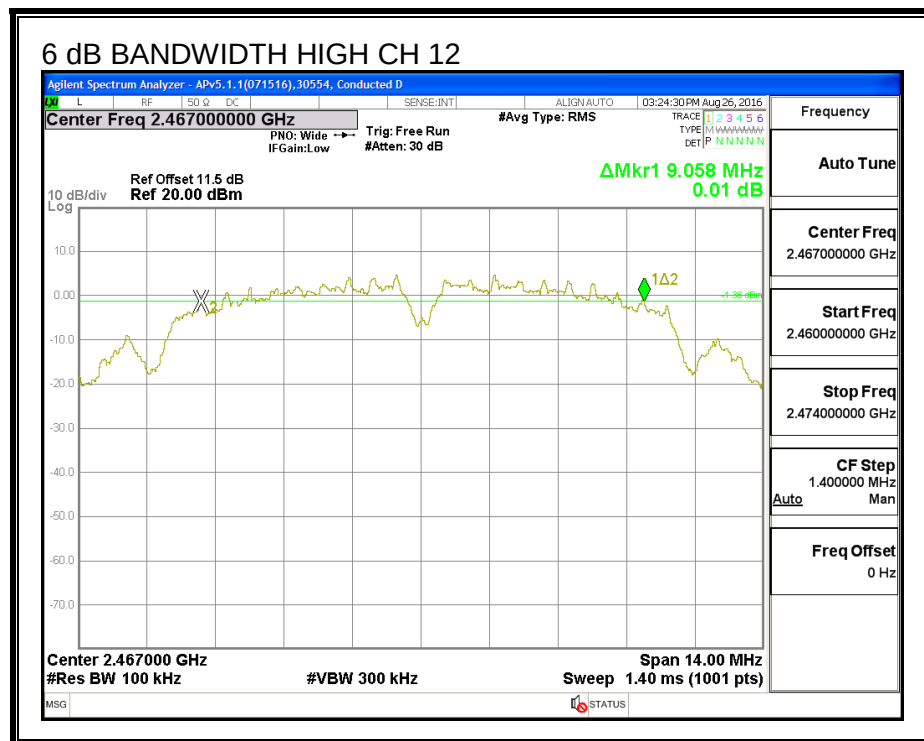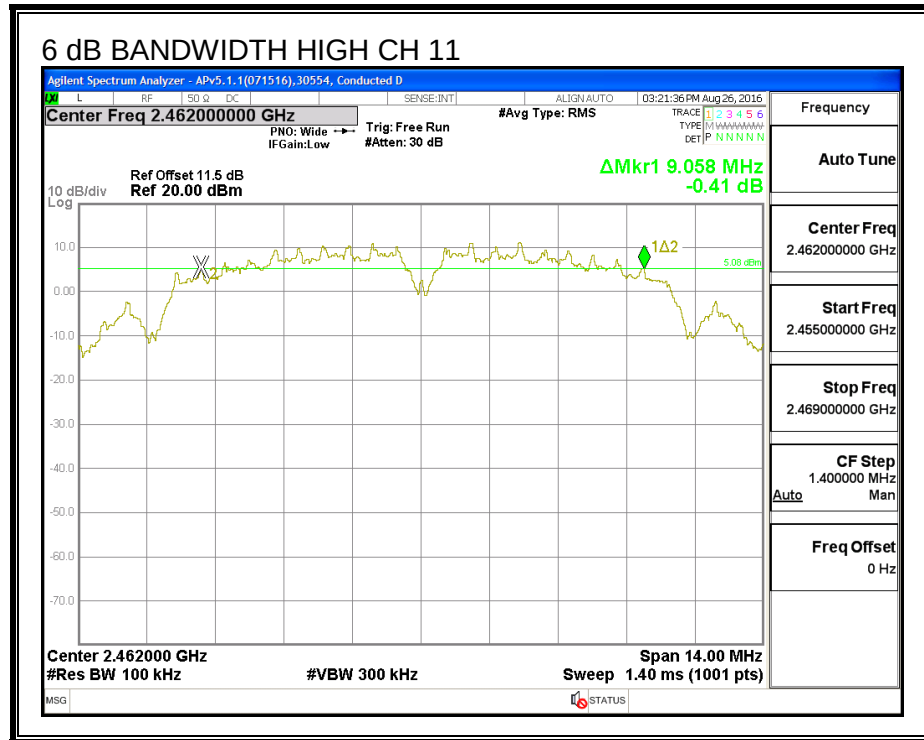

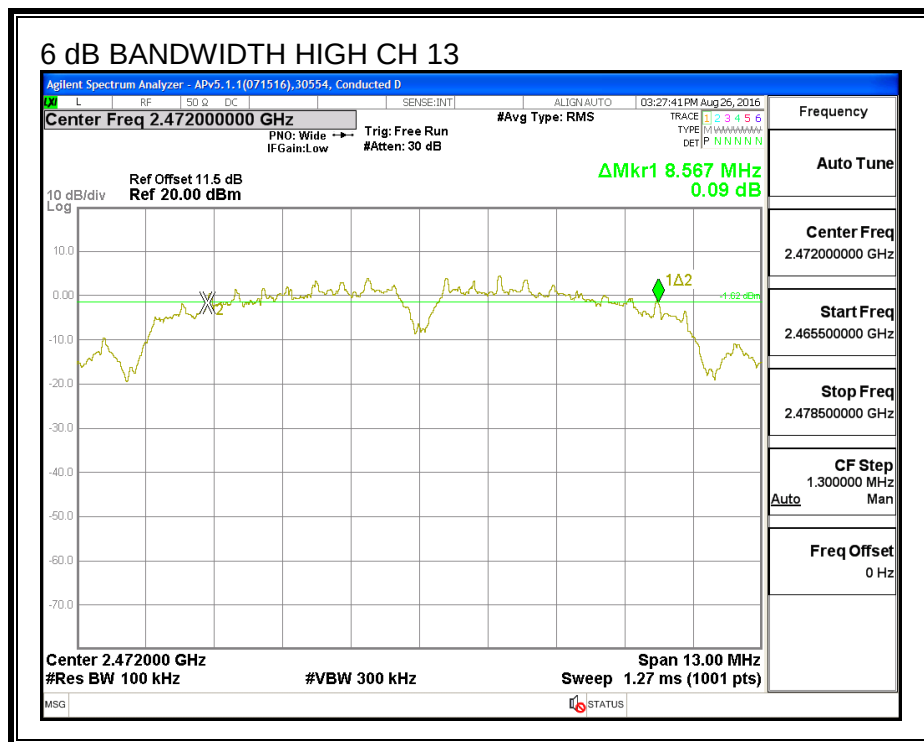

8.2.2. 99% BANDWIDTH



LIMITS



None; for reporting purposes only.


RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	11.373
Mid	2437	10.454
High_11	2462	11.713
High_12	2467	10.957
High_13	2472	11.542

99% BANDWIDTH

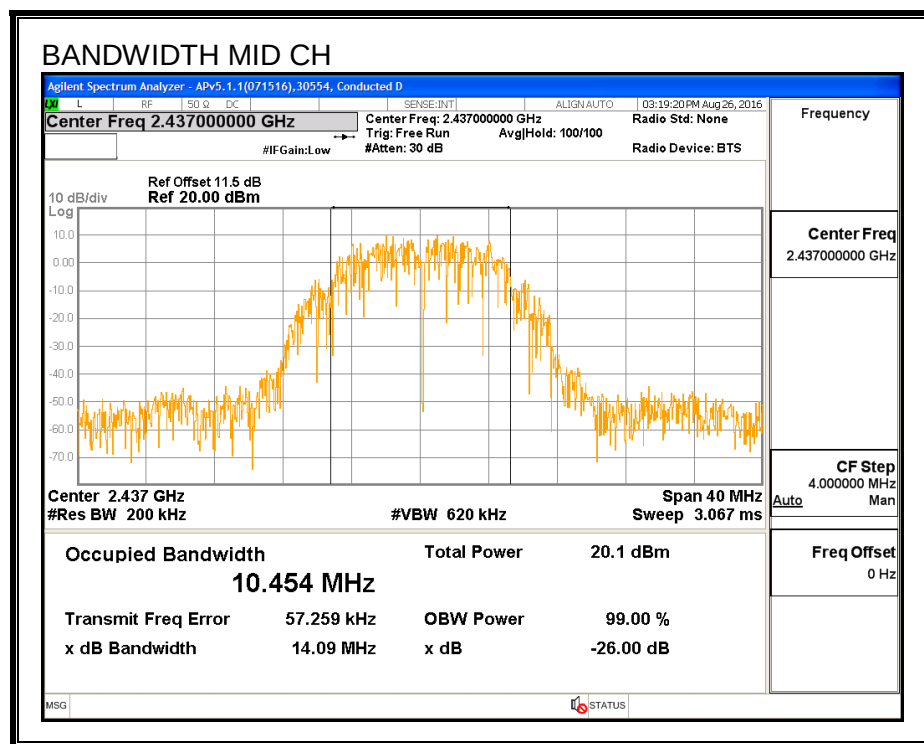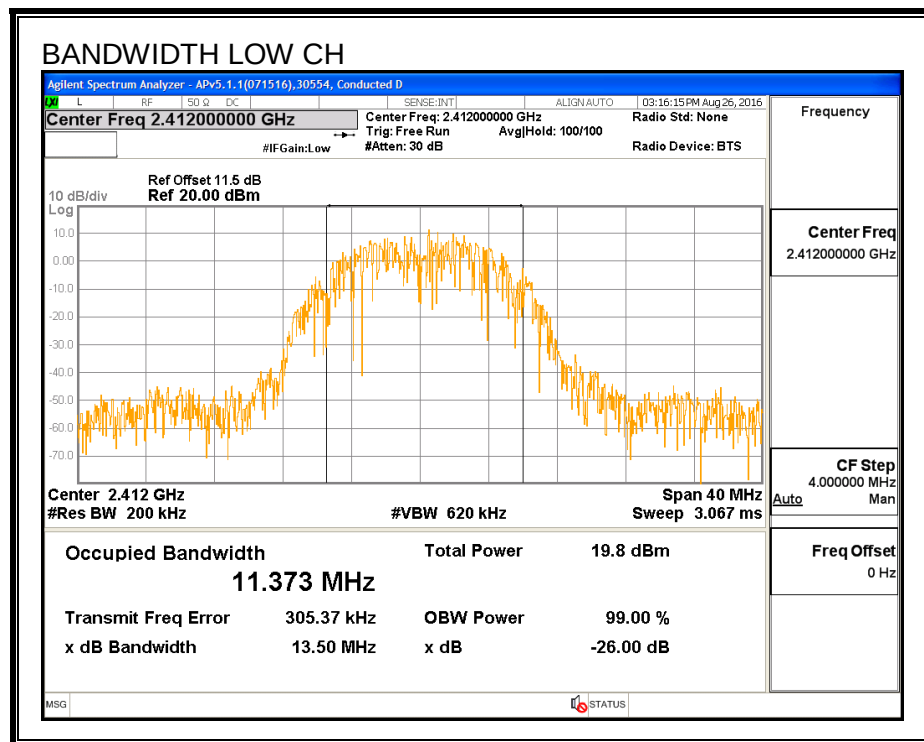

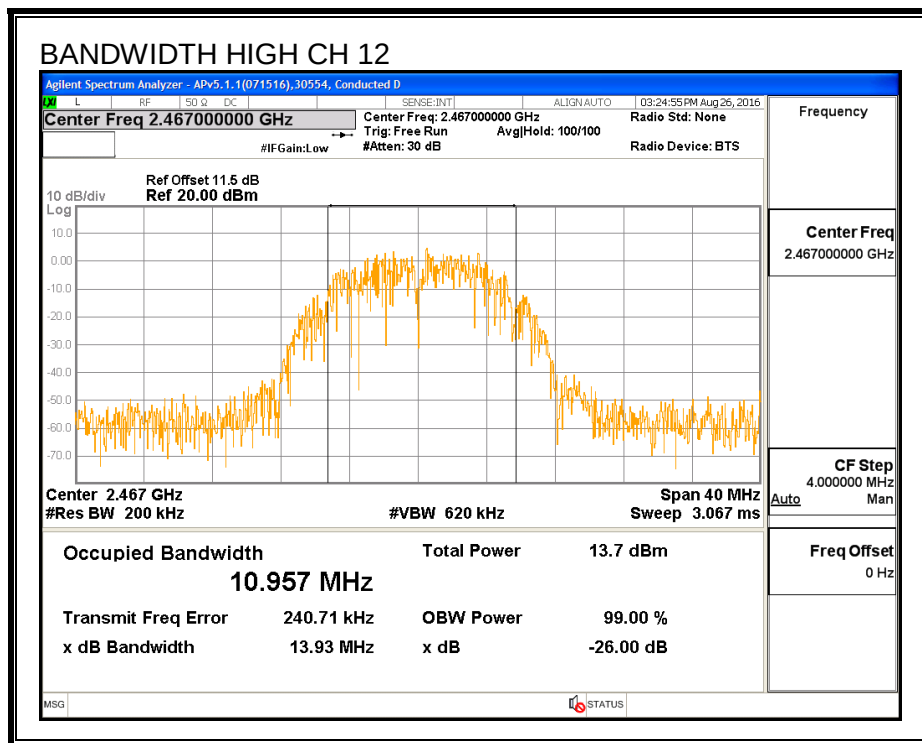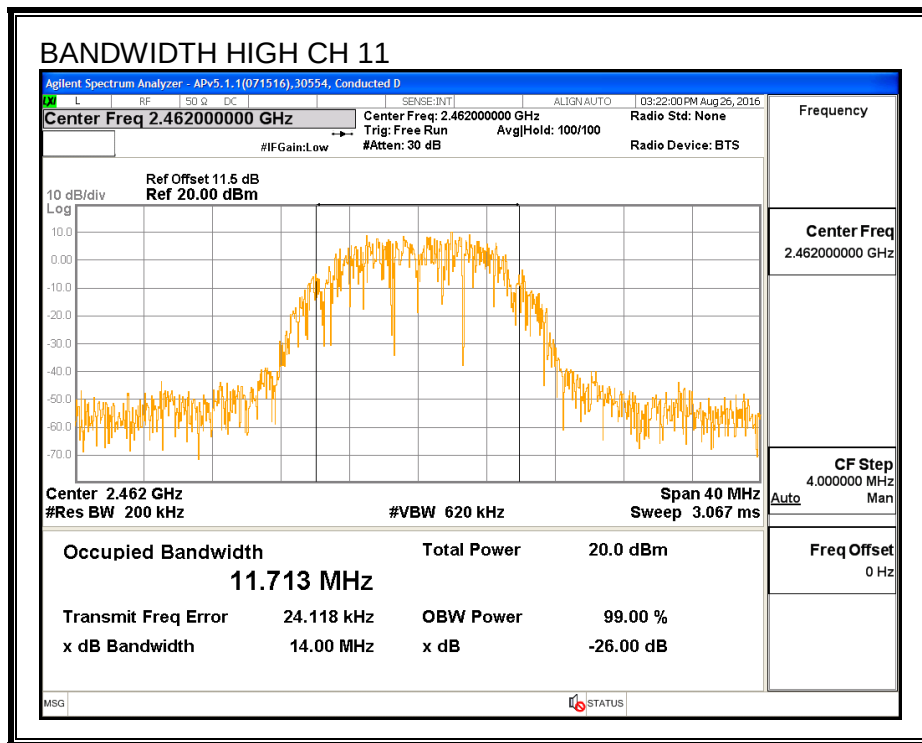

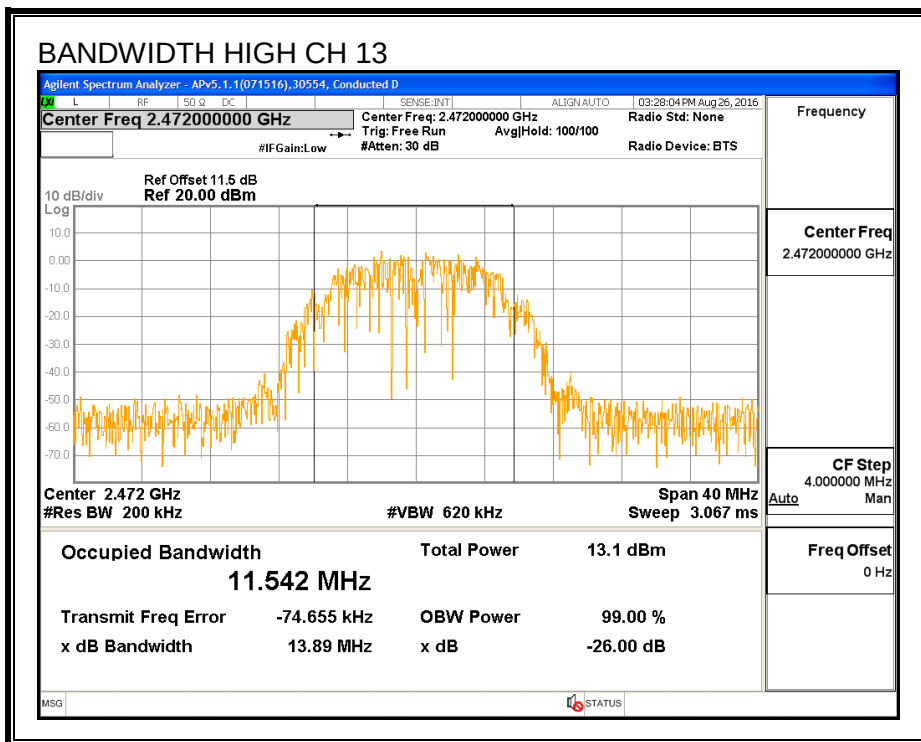

8.2.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	Power (dBm)
Low	2412	16.45
Mid	2437	16.44
High_11	2462	14.96
High_12	2467	12.99
High_13	2472	11.97

8.2.4. OUTPUT POWER

LIMITS

FCC §15.247

IC RSS-247 (5.4) (4)

For systems using digital modulation in the 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Max Power (dBm)
Low	2412	3.3	30.00	30	36	30.00
Mid	2437	3.3	30.00	30	36	30.00
High_11	2462	3.3	30.00	30	36	30.00
High_12	2467	3.3	30.00	30	36	30.00
High_13	2472	3.3	30.00	30	36	30.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power
--------------------	------	--

Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Margin (dB)
Low	2412	19.55	19.55	30.00	-10.45
Mid	2437	19.49	19.49	30.00	-10.51
High_11	2462	18.12	18.12	30.00	-11.88
High_12	2467	16.07	16.07	30.00	-13.93
High_13	2472	15.14	15.14	30.00	-14.86

8.2.5. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247

IC RSS-247 (5.2) (2)

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 KHz band during any time interval of continuous transmissions.

RESULTS

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

PSD Results

Channel	Frequency (MHz)	Meas (dBm)	Total Corr'd PSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-6.51	-6.51	8.0	-14.5
Mid	2437	-6.63	-6.63	8.0	-14.6
High_11	2462	-8.15	-8.15	8.0	-16.2
High_12	2467	-10.14	-10.14	8.0	-18.1
High_13	2472	-13.17	-13.17	8.0	-21.2

PSD

