



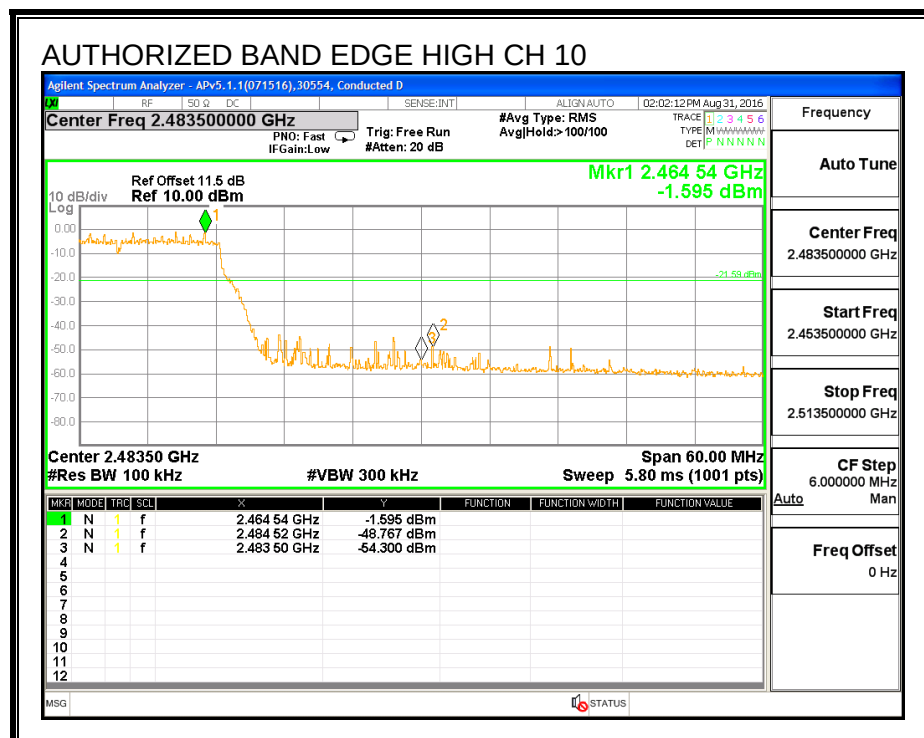
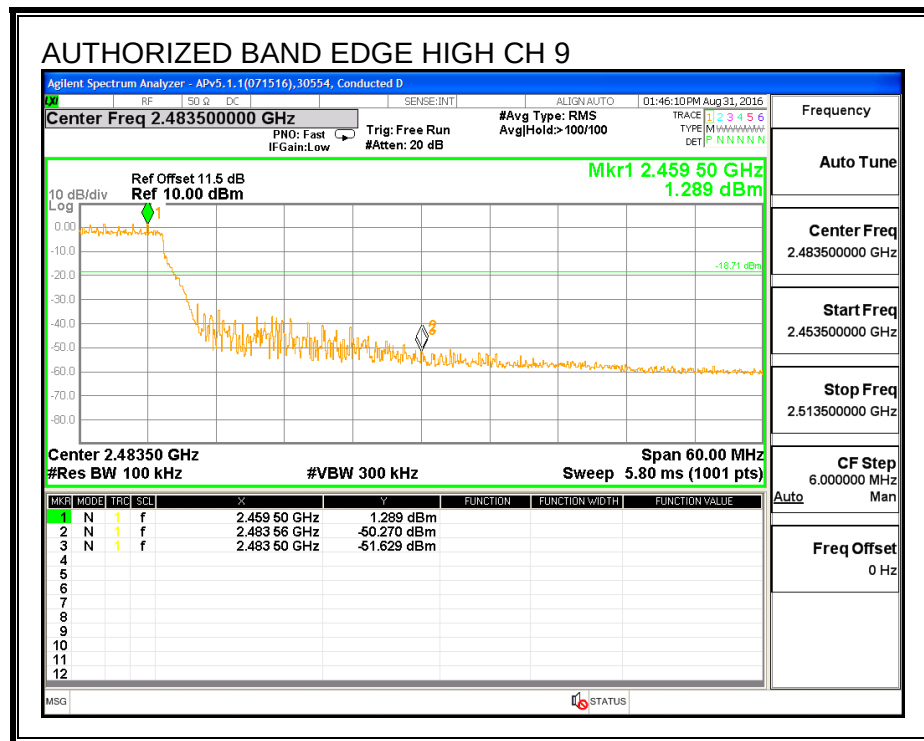
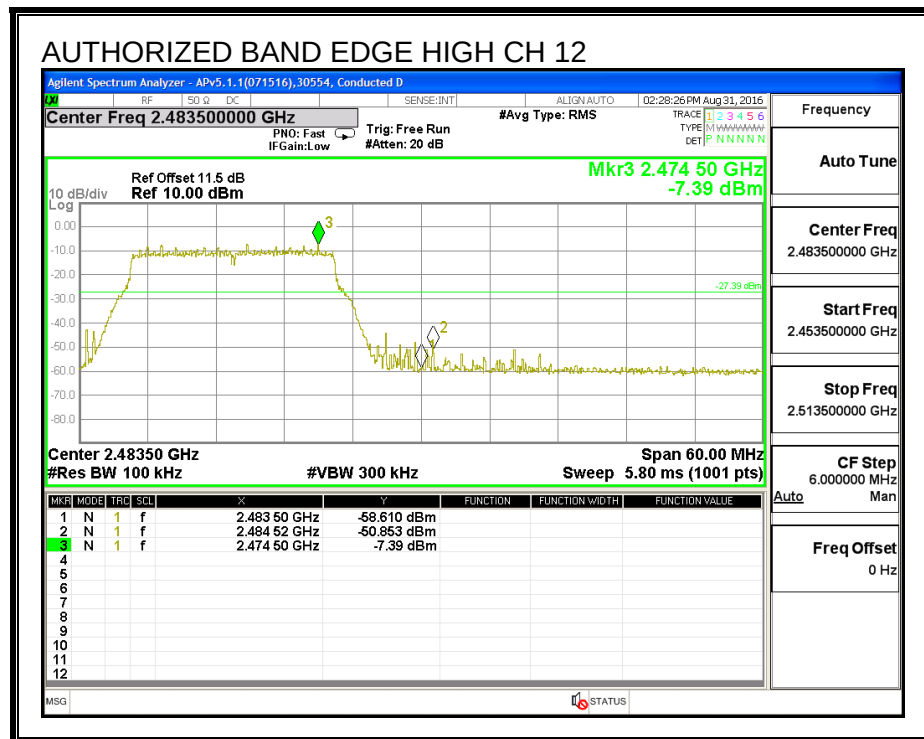
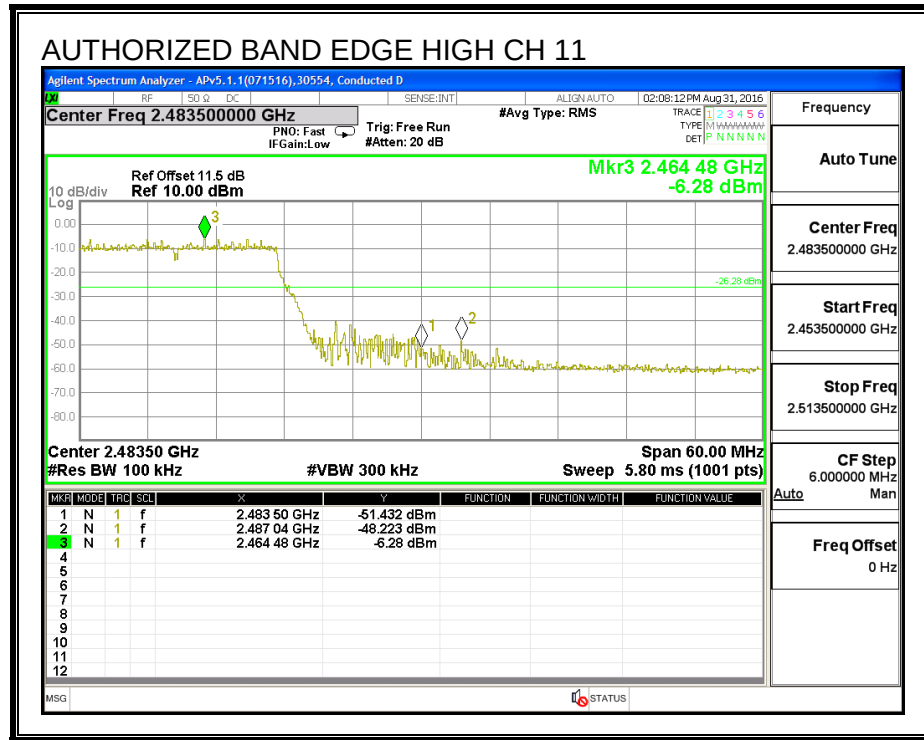



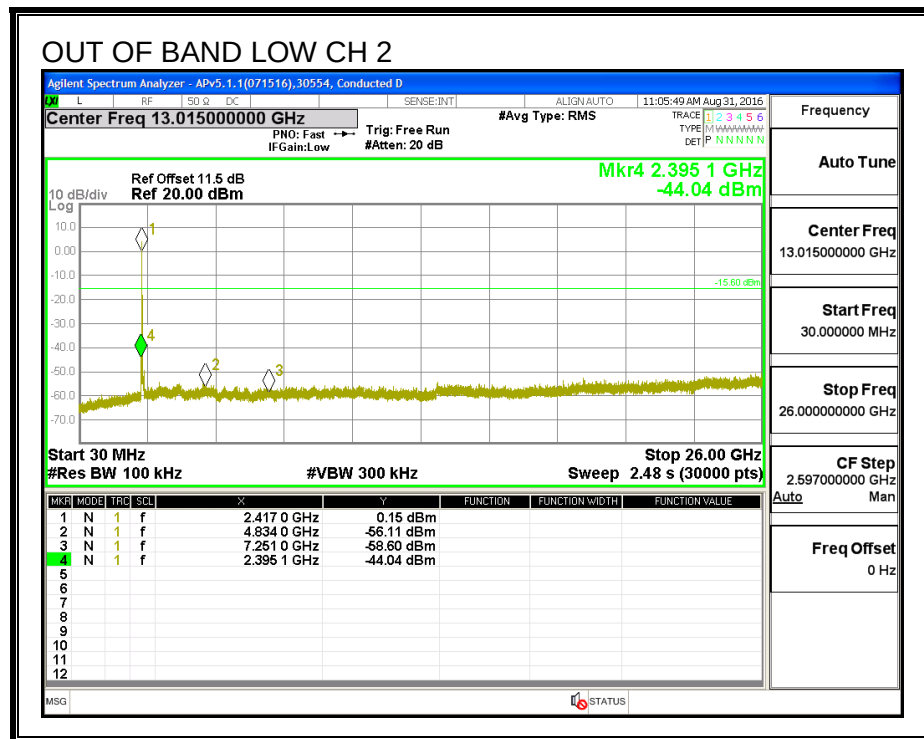



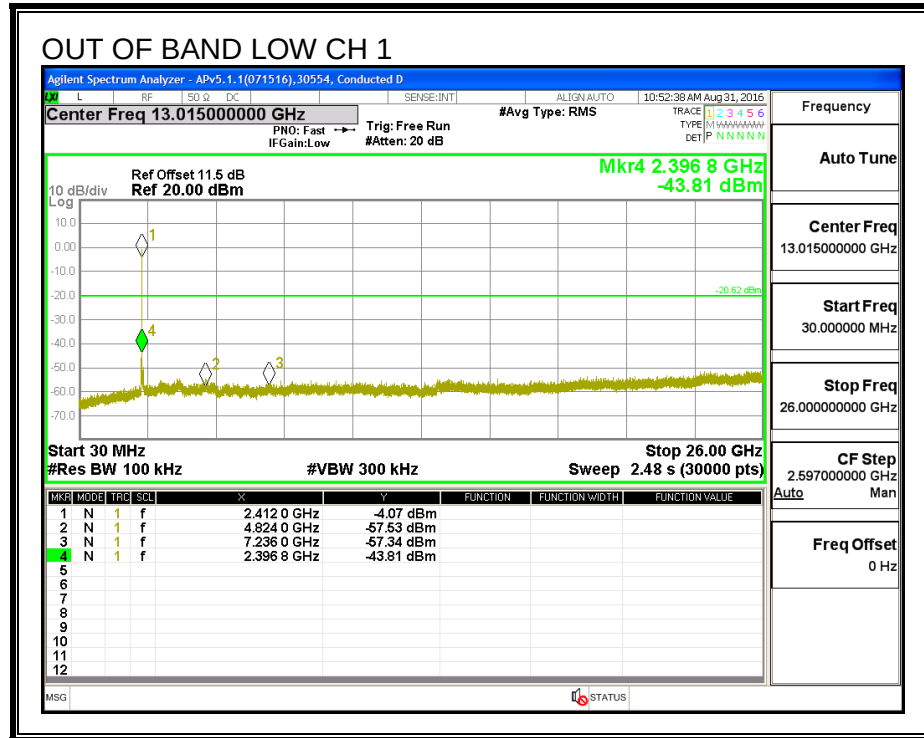


OUT-OF-BAND EMISSIONS, Chain 2

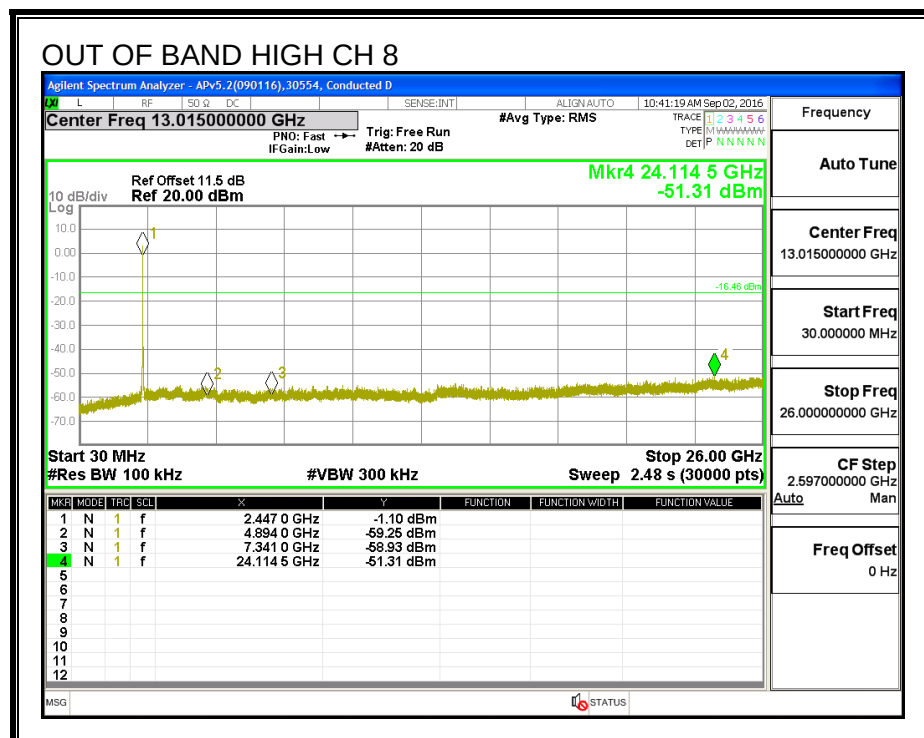

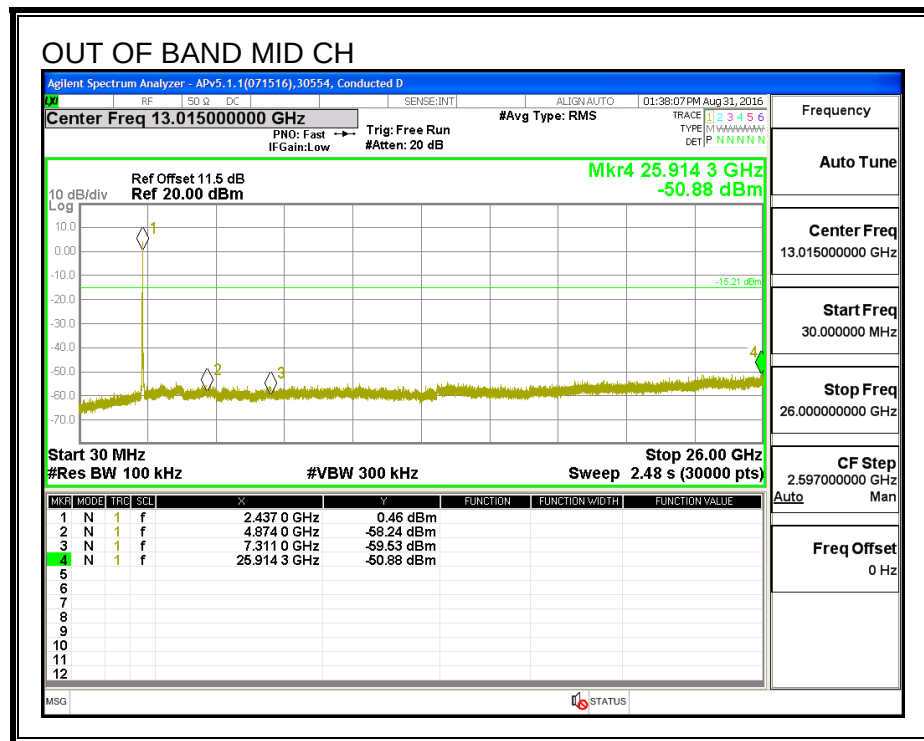

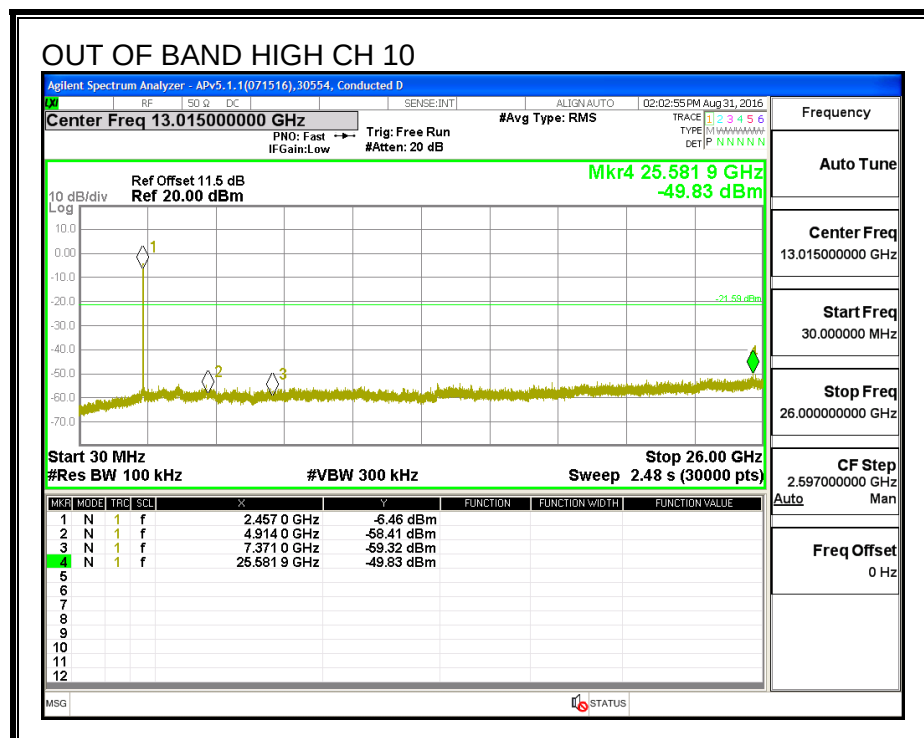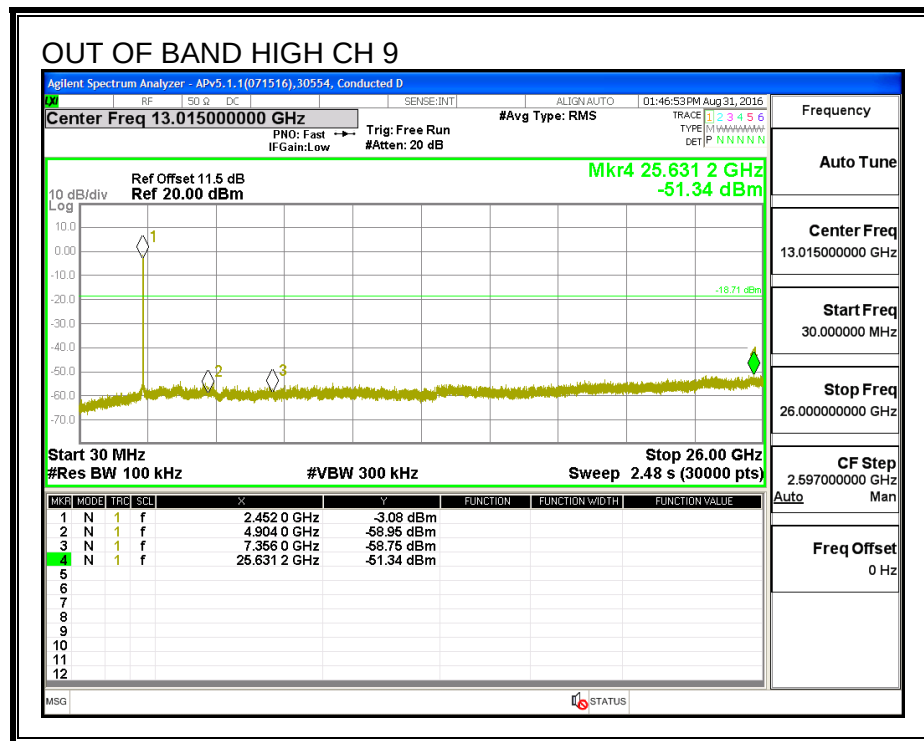

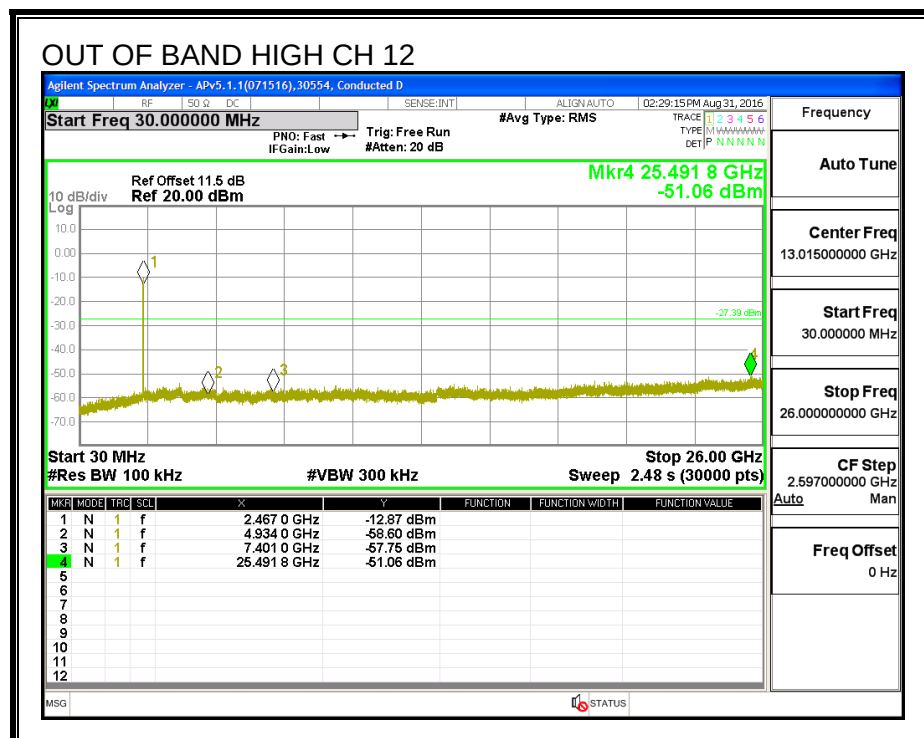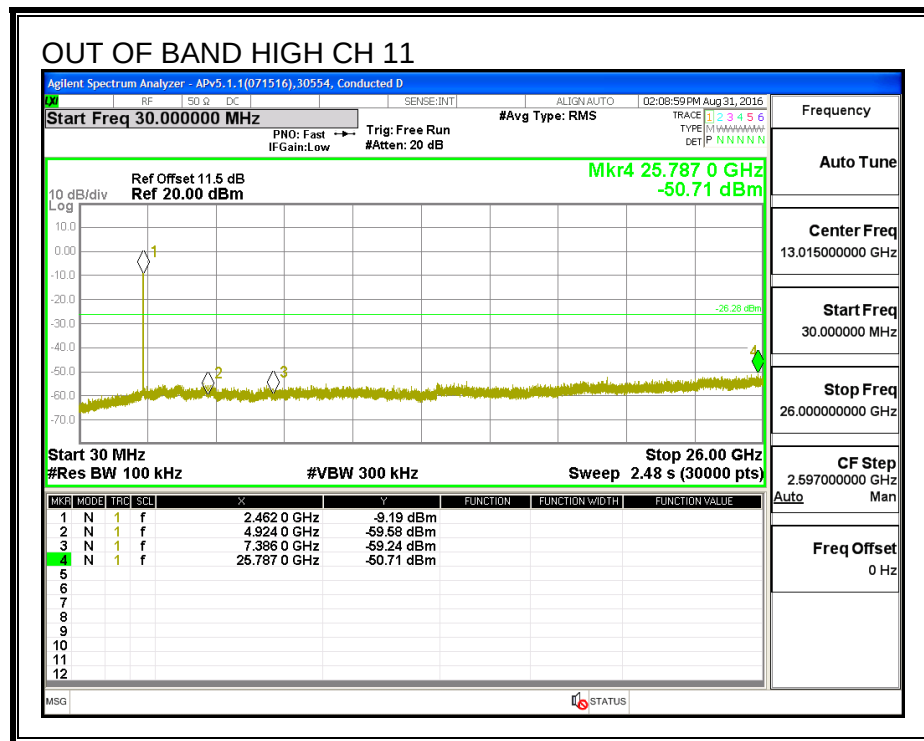

8.22. 802.11n 2Tx BEAM FORMING MODE IN THE 2.4 GHZ BAND, CHAIN 0+1

8.22.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)



IC RSS-247 (5.2) (1)



The minimum 6 dB bandwidth shall be at least 500 kHz.



RESULTS


Channel	Frequency (MHz)	6 dB BW Chain 0 (MHz)	6 dB BW Chain 1 (MHz)	Minimum Limit (MHz)
Low_1	2412	17.604	17.604	0.5
Low_2	2417	17.186	17.685	0.5
Mid	2437	17.577	17.577	0.5
High_9	2452	17.685	17.604	0.5
High_10	2457	17.631	17.577	0.5
High_11	2462	17.604	17.604	0.5
High_12	2467	17.604	17.604	0.5

6 dB BANDWIDTH, Chain 0

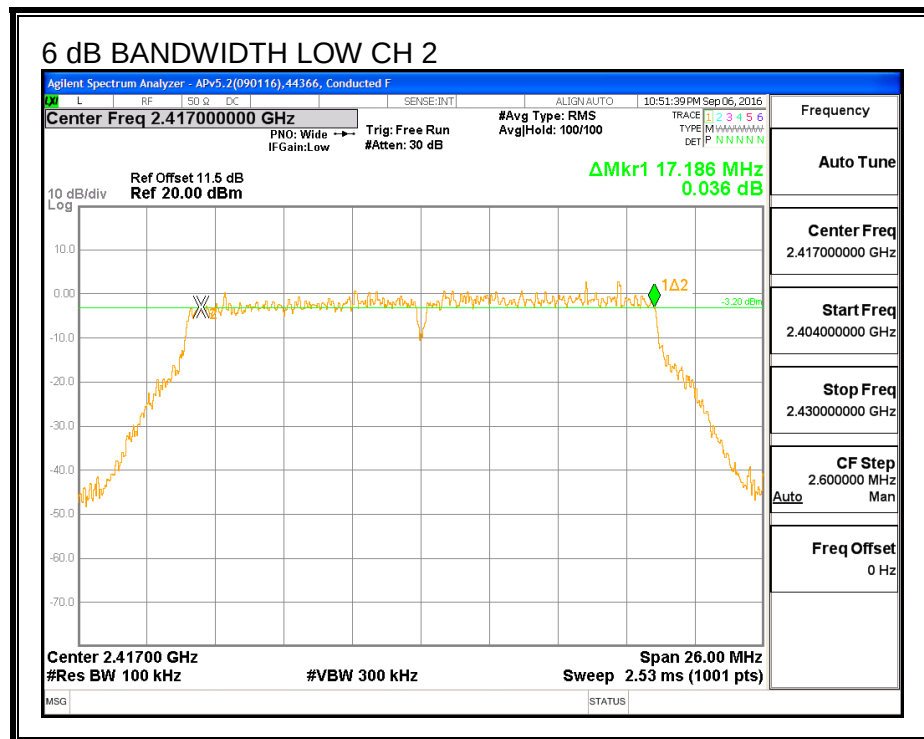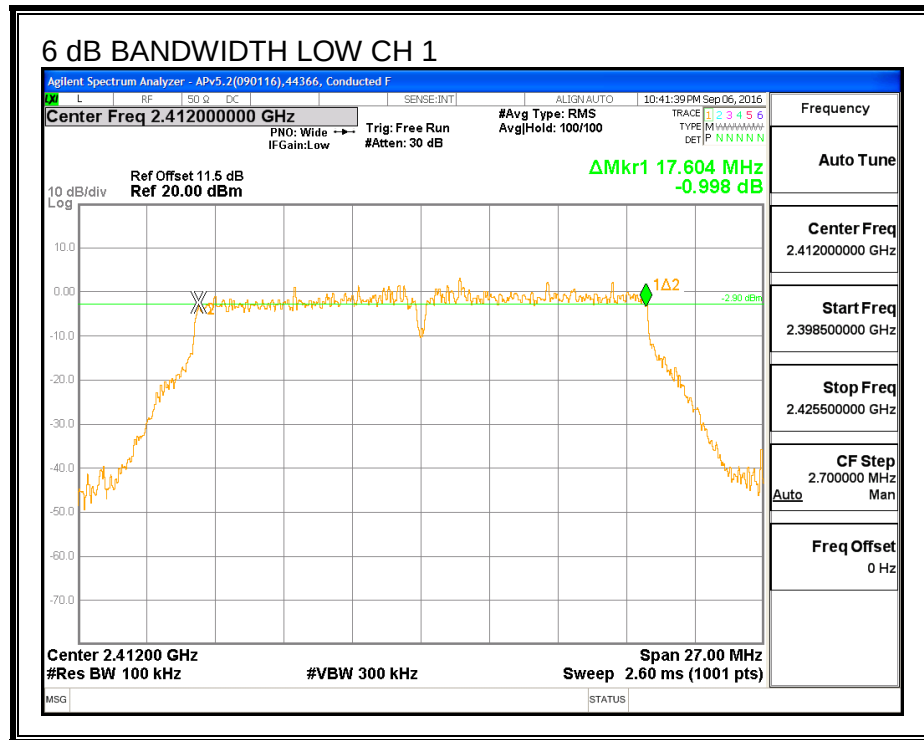


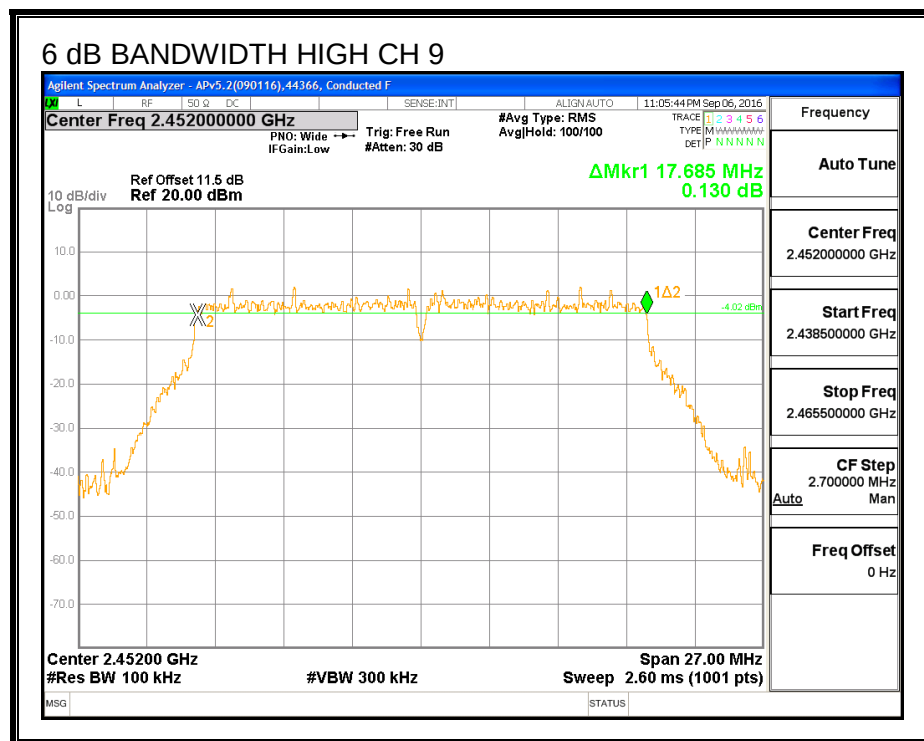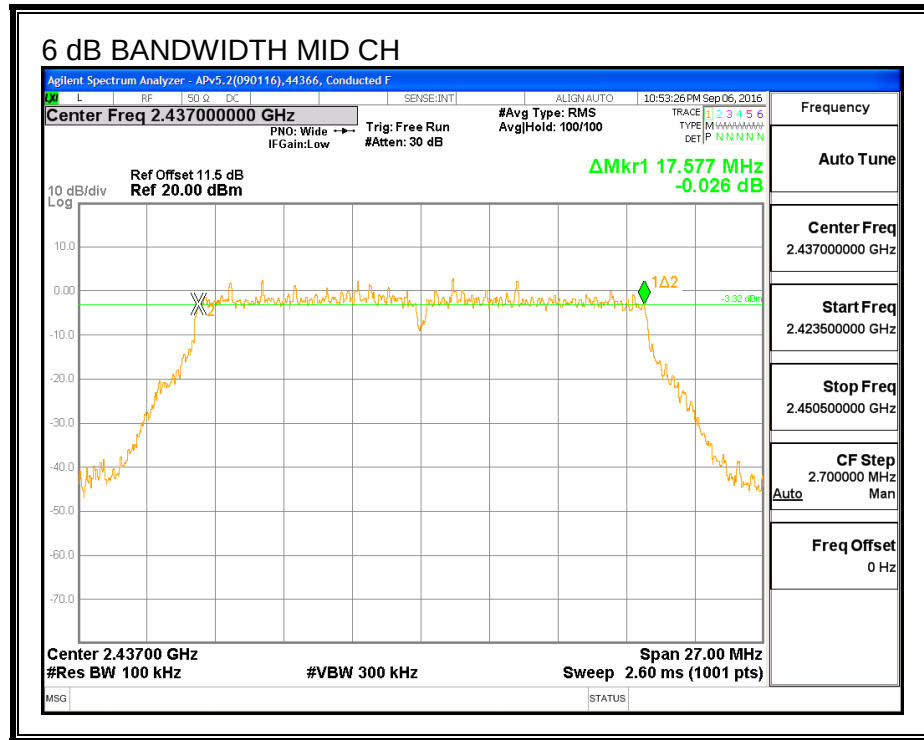


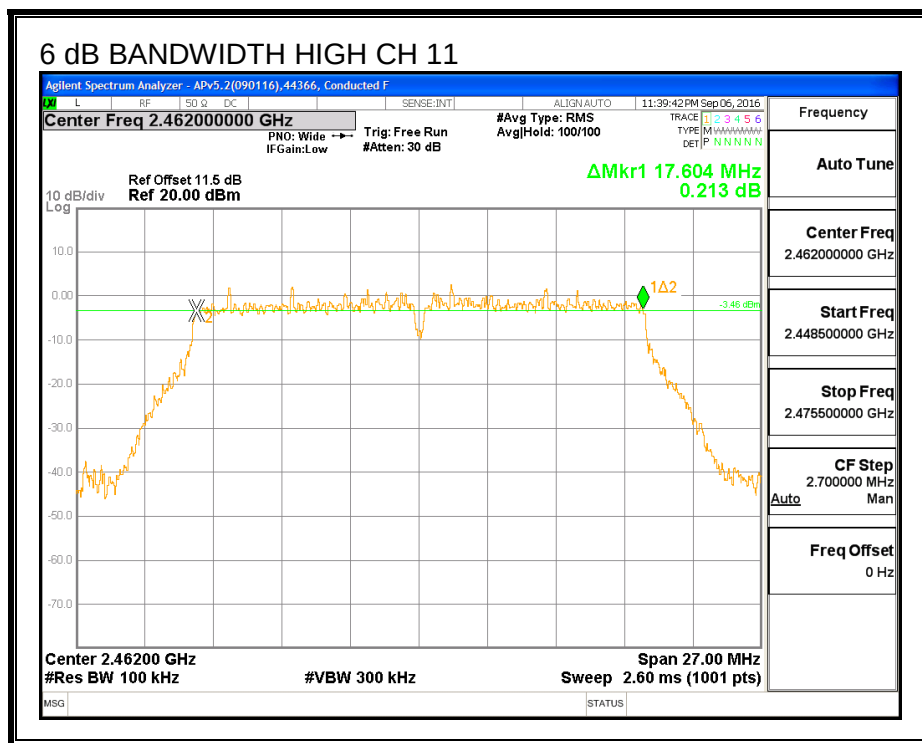
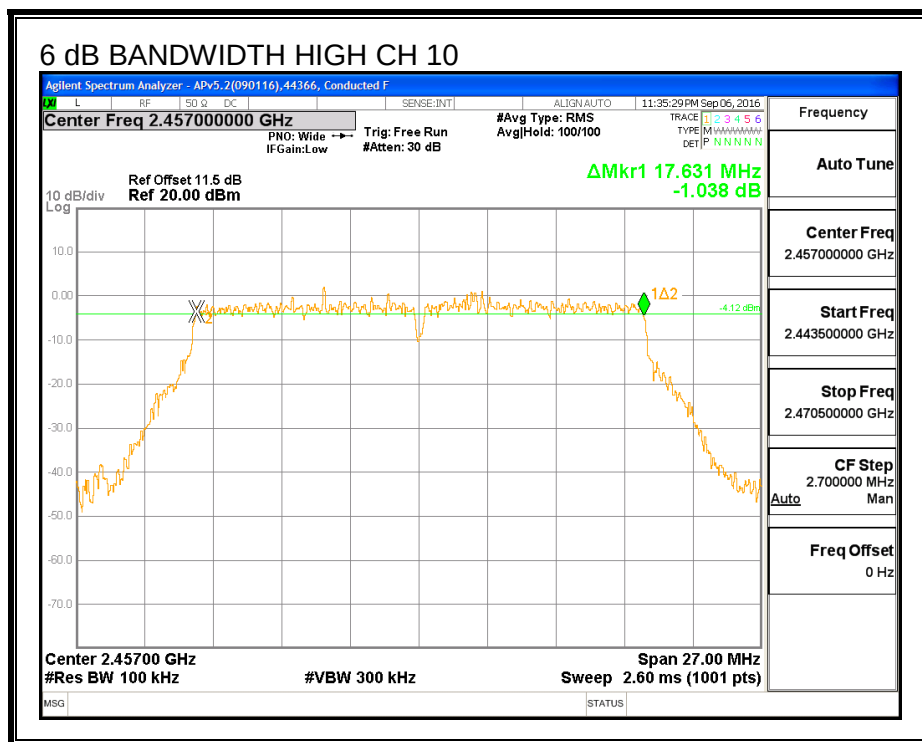



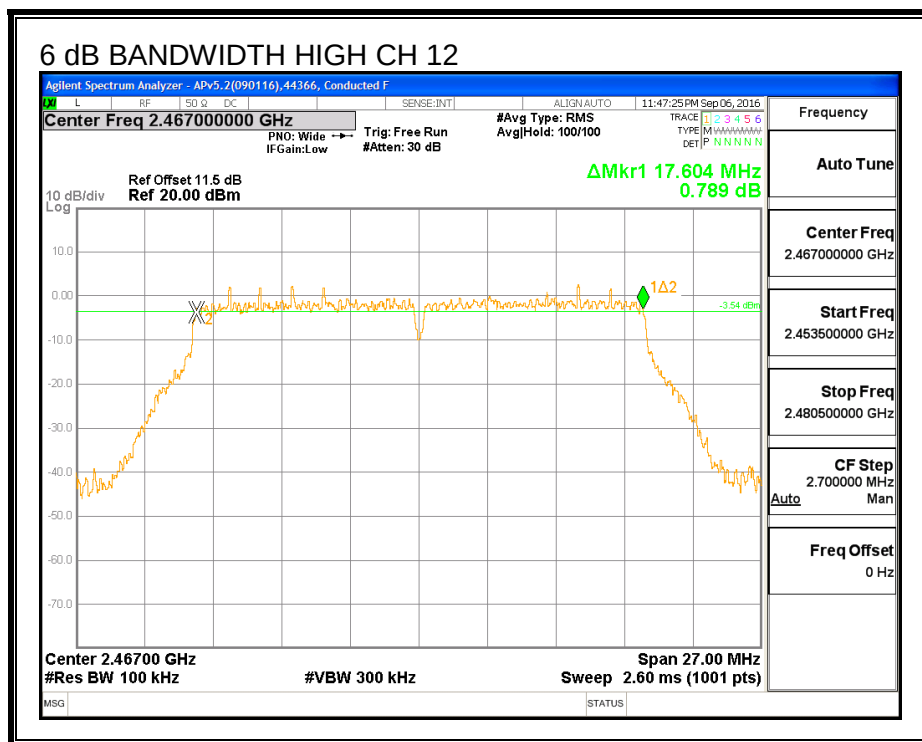


6 dB BANDWIDTH, Chain 1

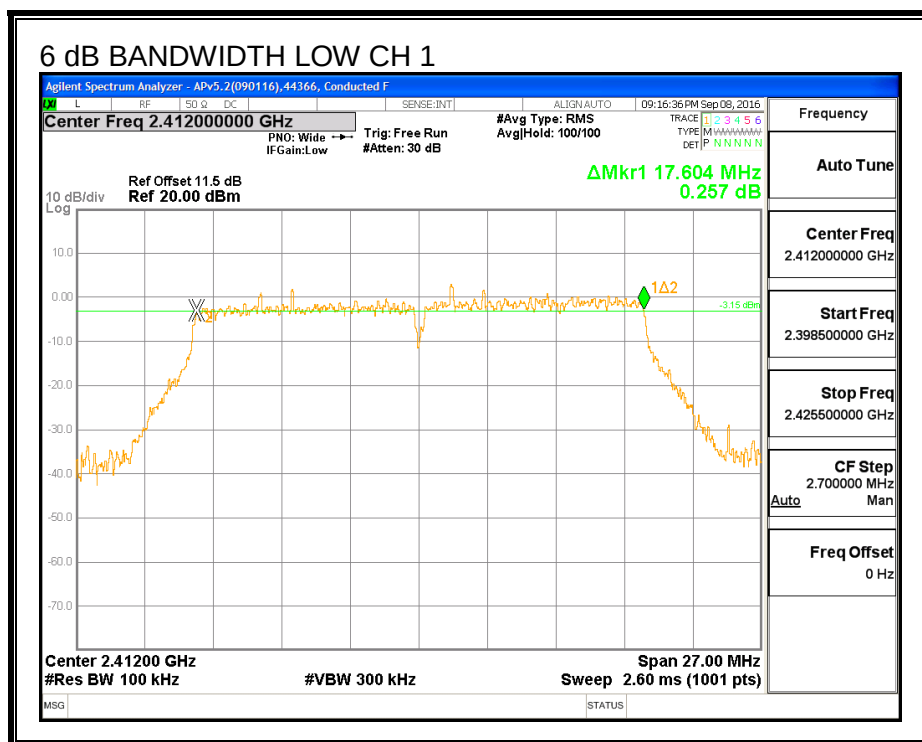

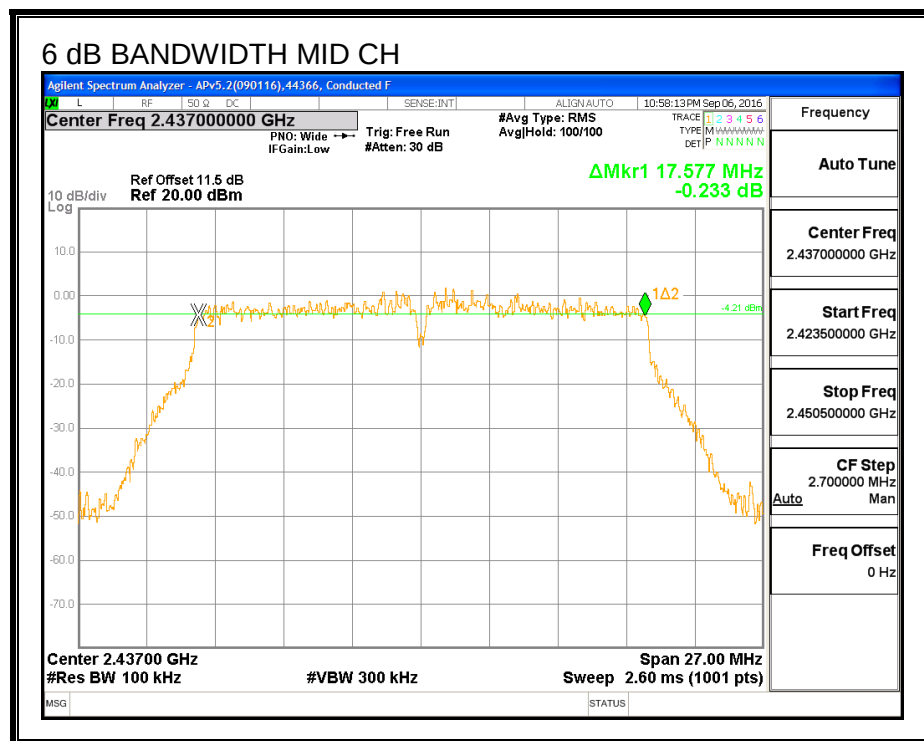

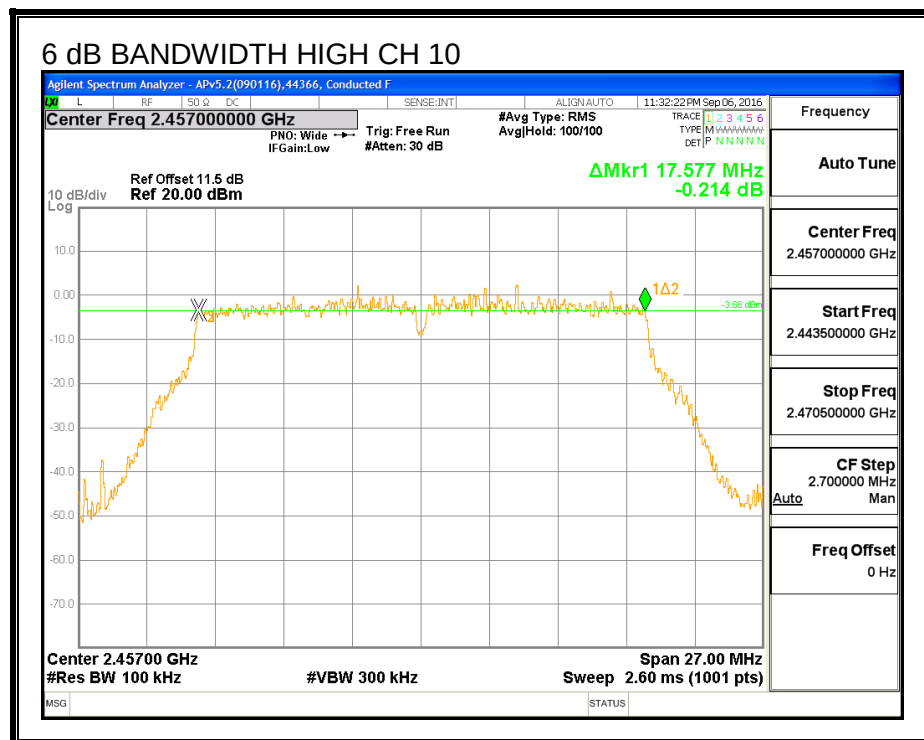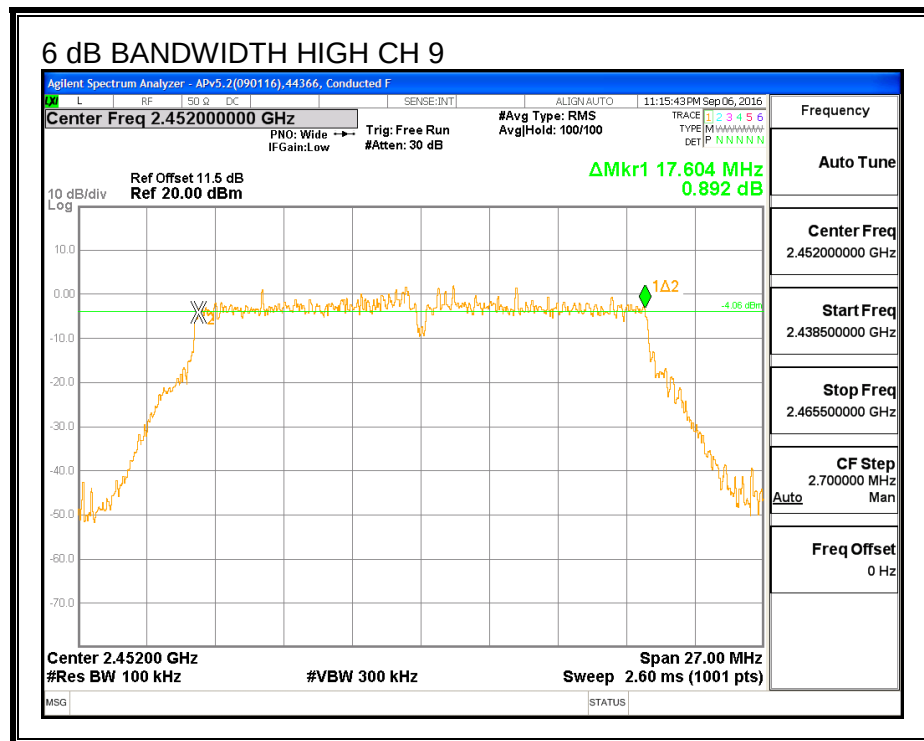

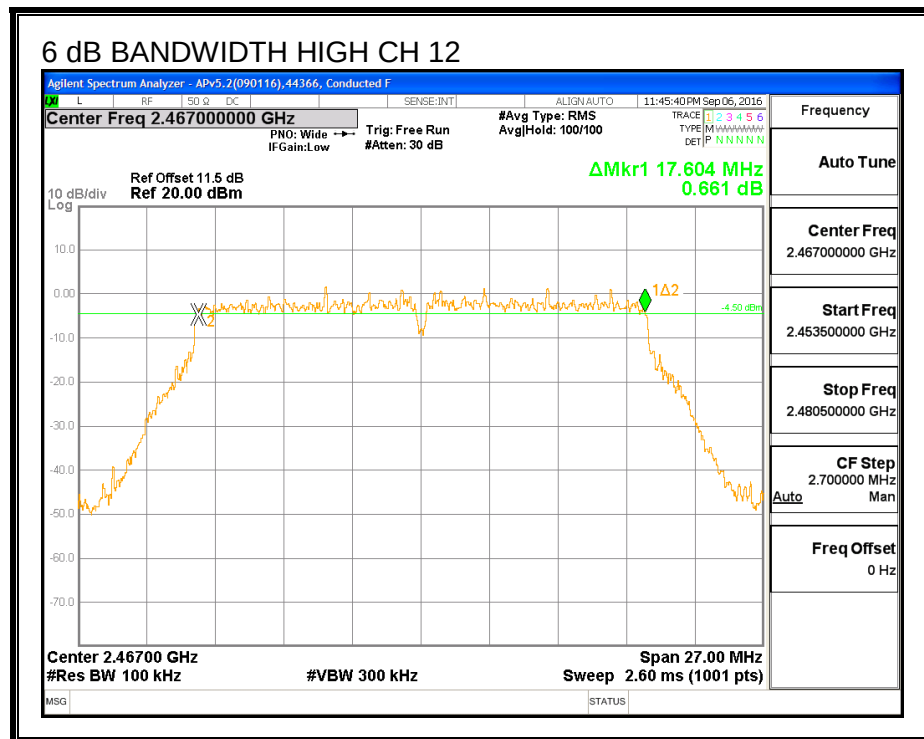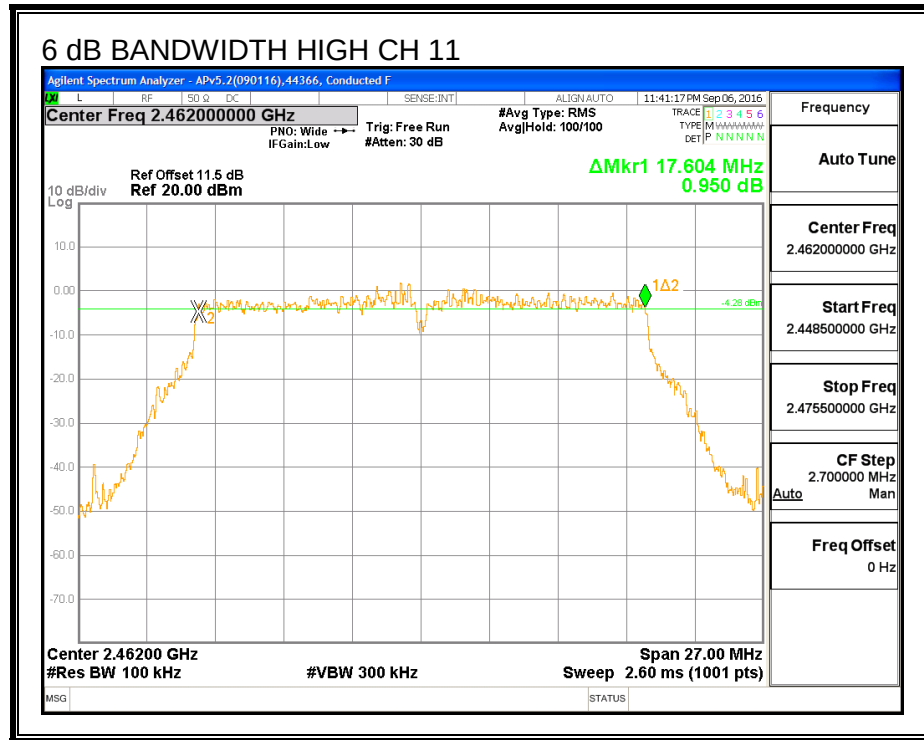

8.22.2. 99% BANDWIDTH



LIMITS



None; for reporting purposes only.



RESULTS


Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)
Low_1	2412	17.872	17.794
Low_2	2417	17.744	17.710
Mid	2437	17.823	17.864
High_9	2452	17.750	17.789
High_10	2457	17.678	17.834
High_11	2462	17.926	17.841
High_12	2467	17.775	17.819

99% BANDWIDTH, Chain 0

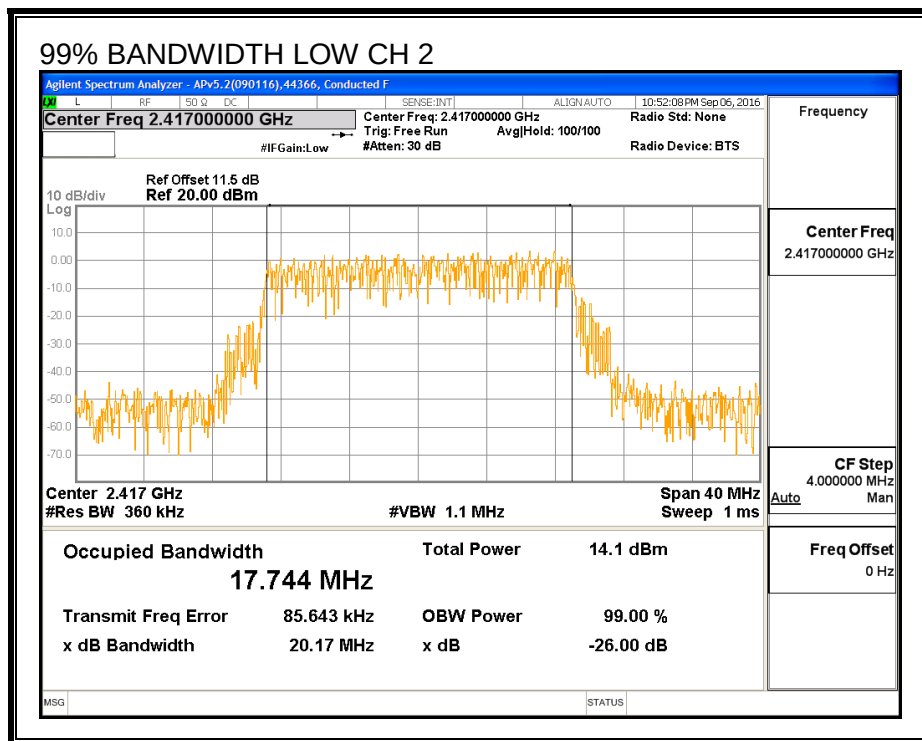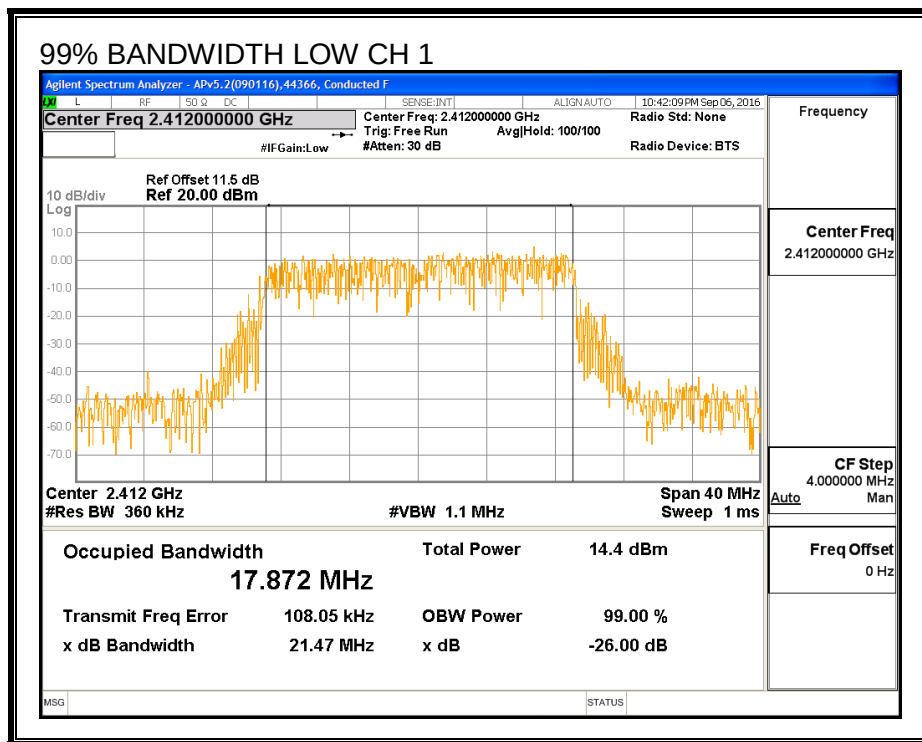


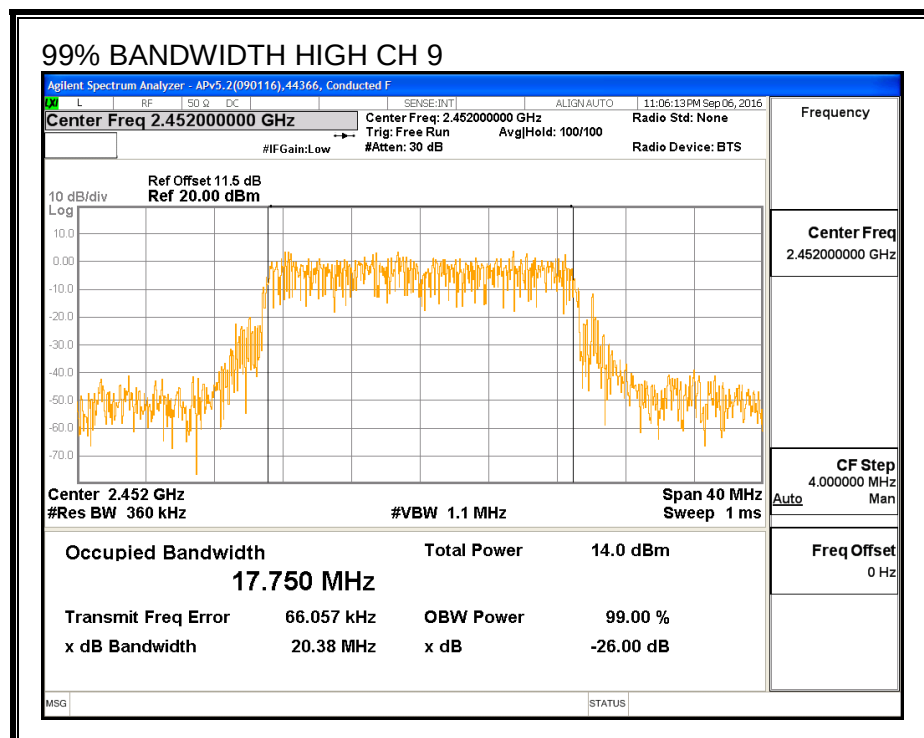
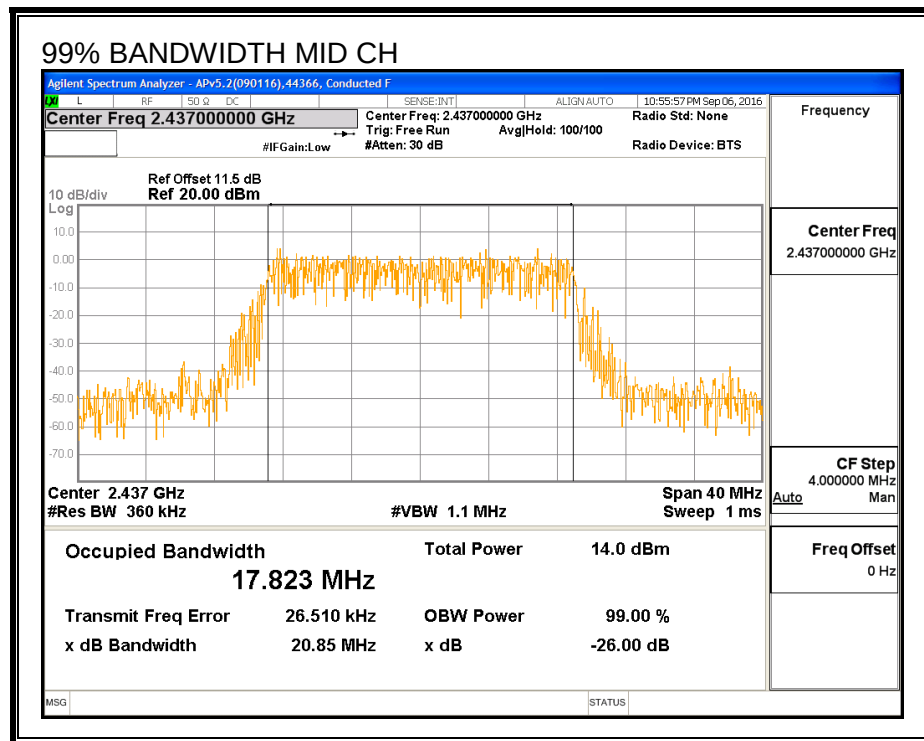


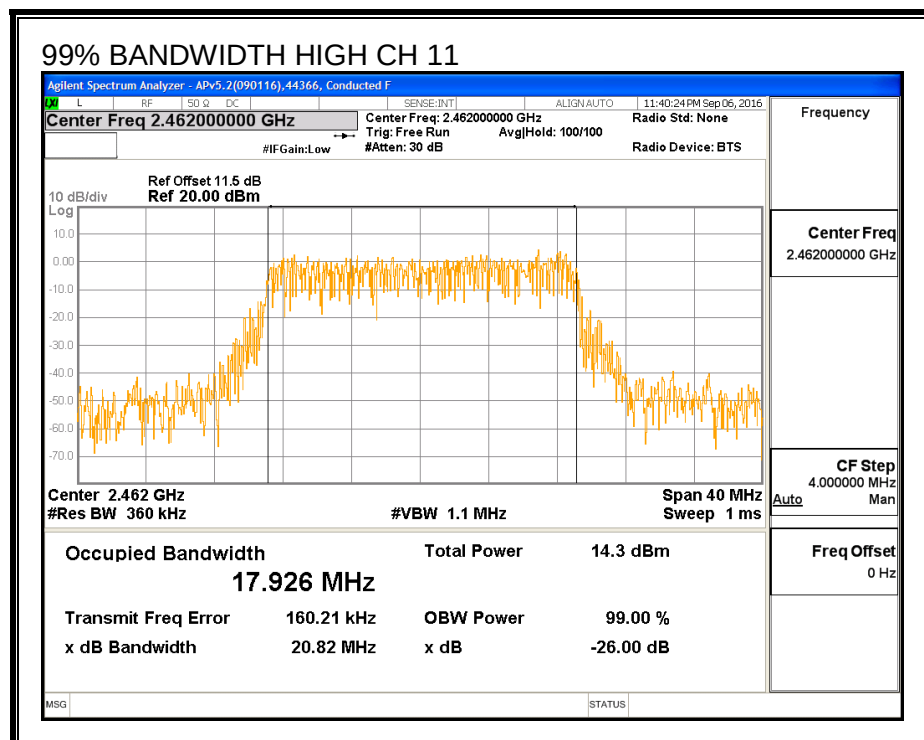
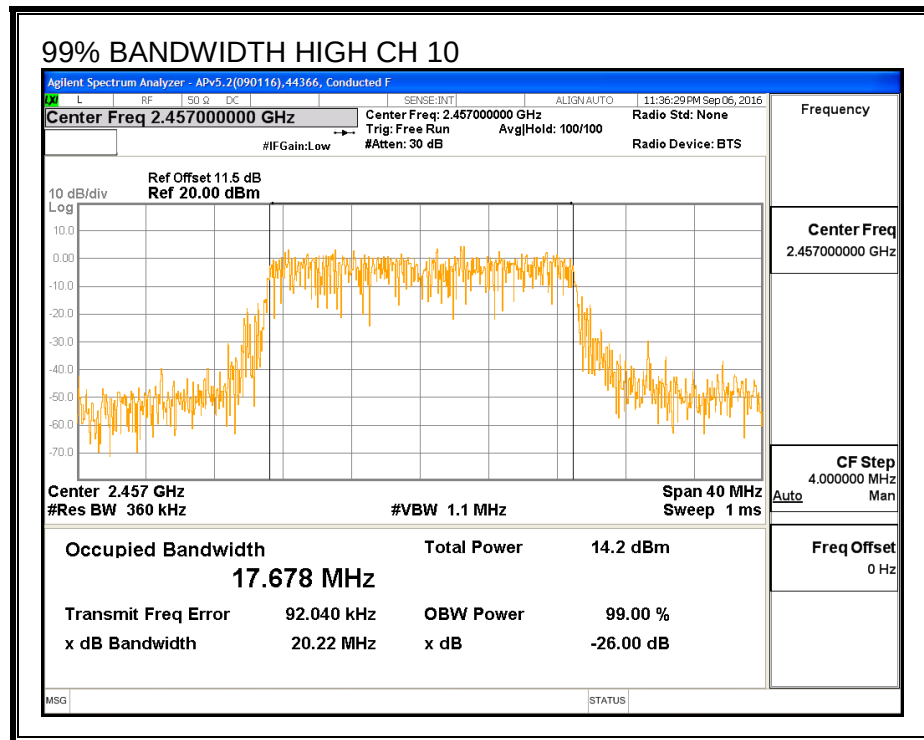



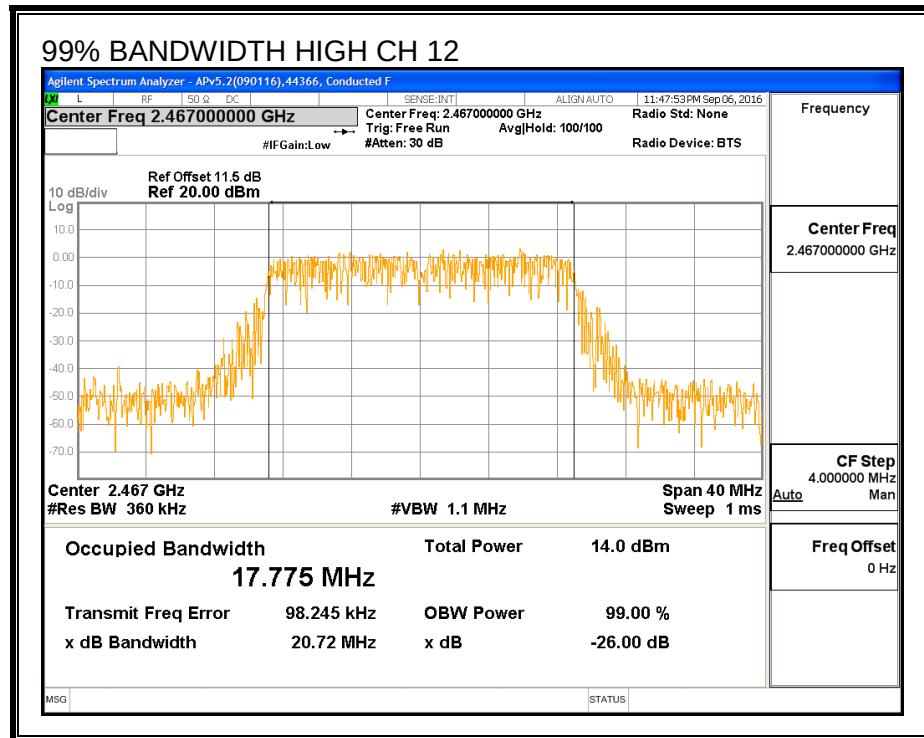


99% BANDWIDTH, Chain 1

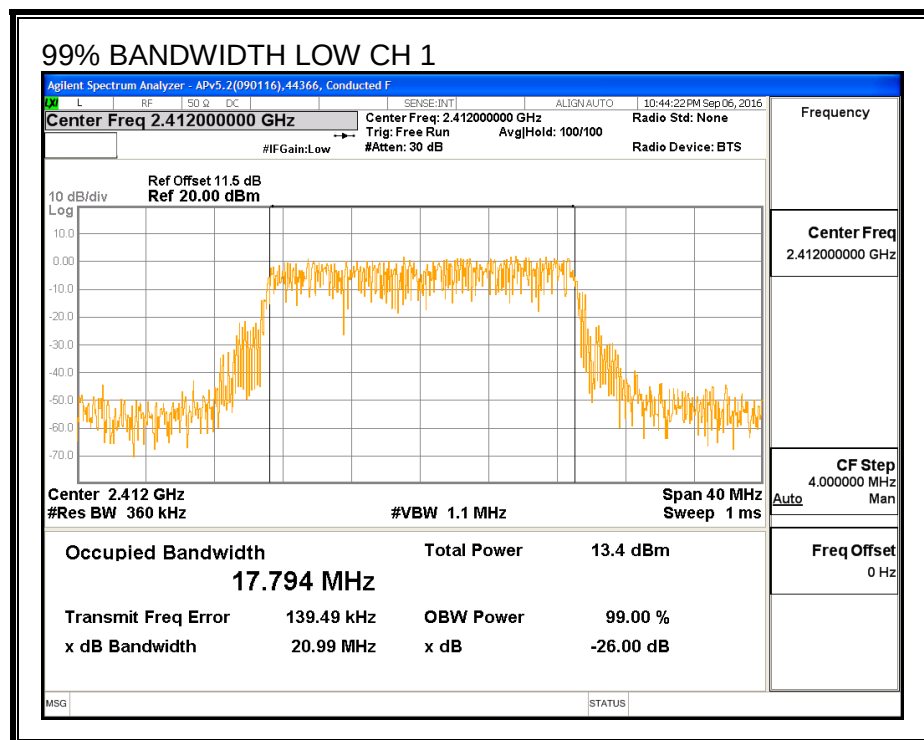

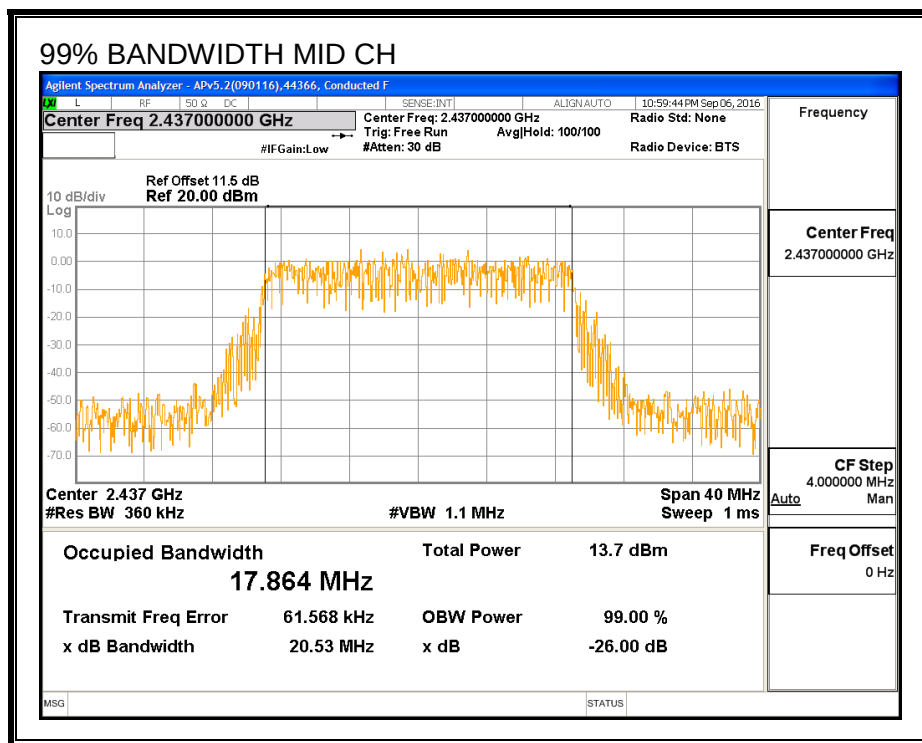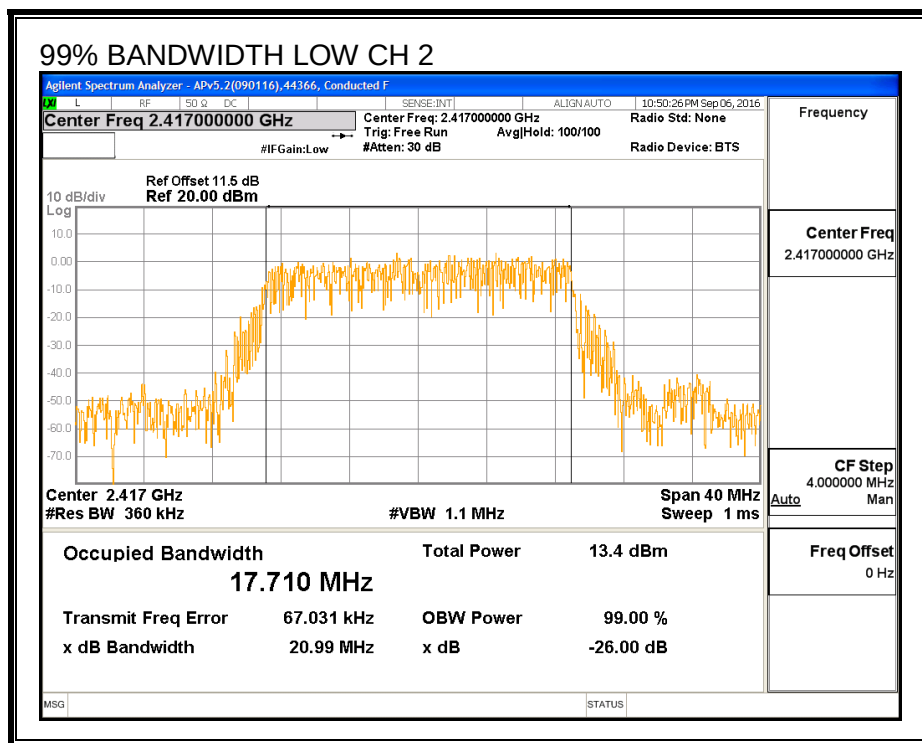

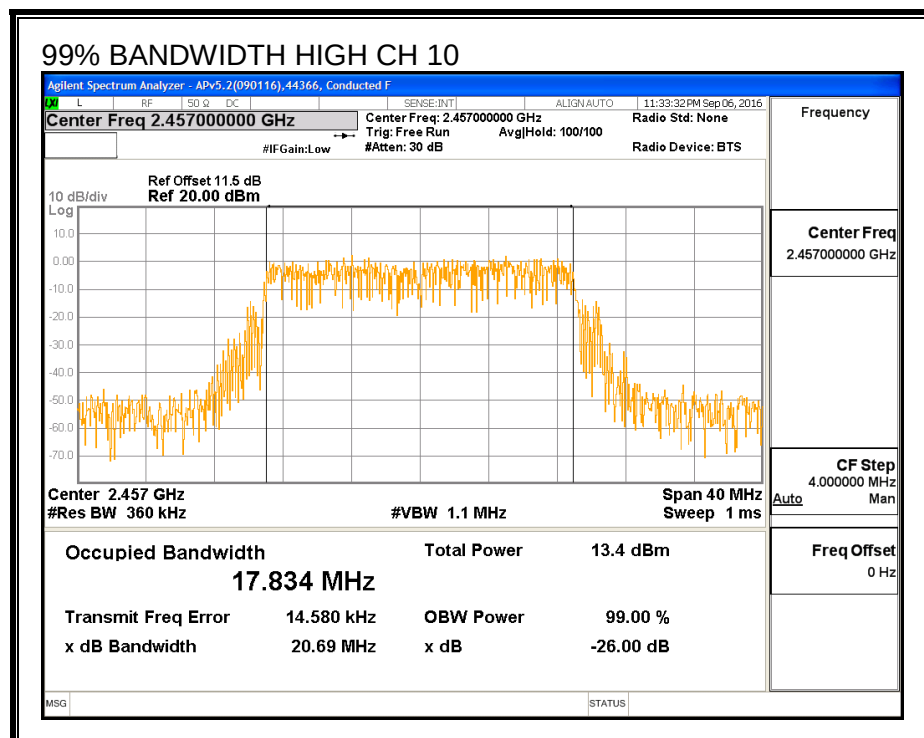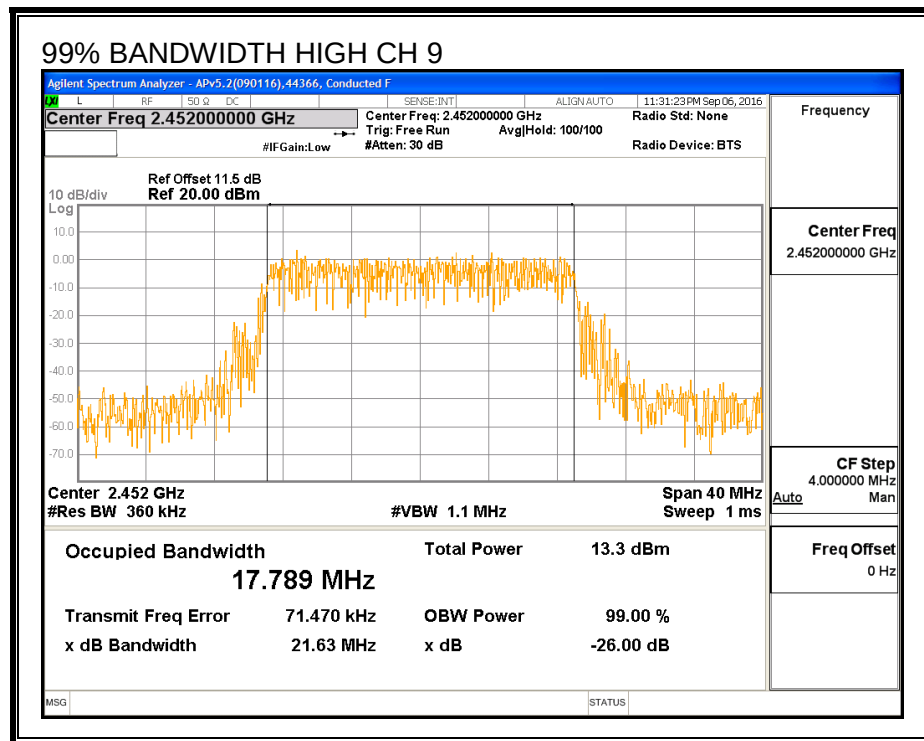

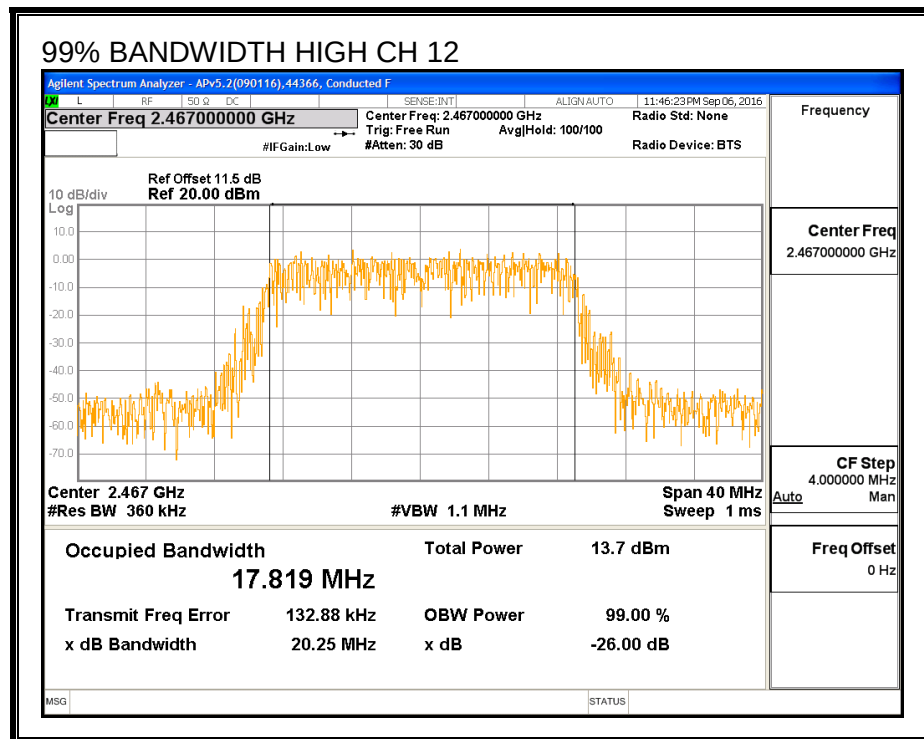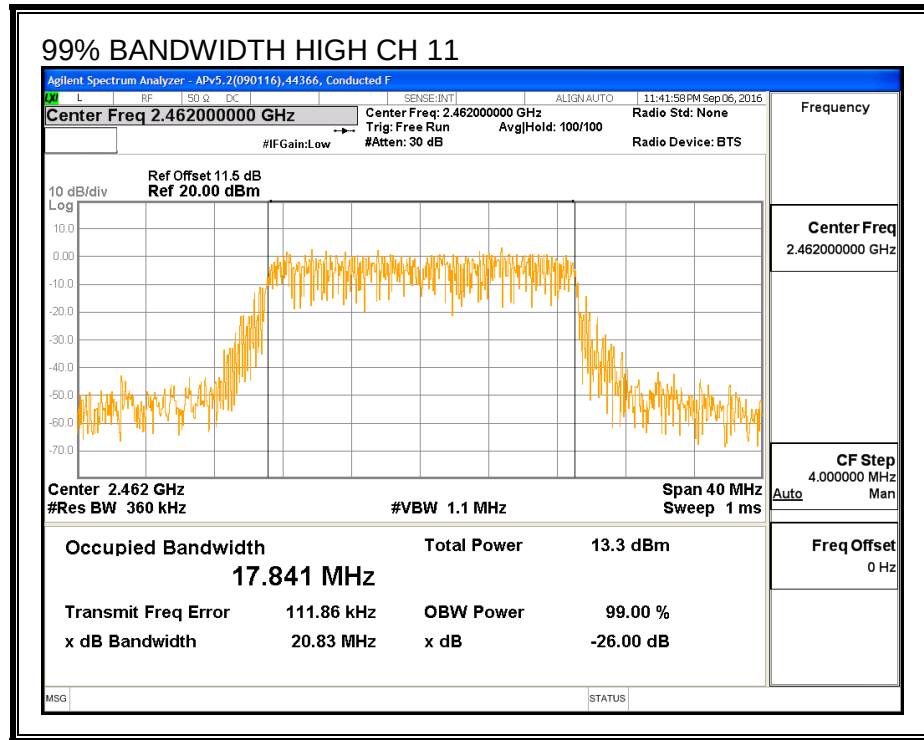

8.22.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	Chain 0 Power (dBm)	Chain 1 Power (dBm)	Total Power (dBm)
Low_1	2412	9.84	9.88	12.87
Low_2	2417	14.90	14.77	17.85
Mid	2437	16.44	16.37	19.42
High_9	2452	14.98	14.93	17.97
High_10	2457	12.97	12.94	15.97
High_11	2462	9.40	9.96	12.70
High_12	2467	-0.53	-0.65	2.42

8.22.4. OUTPUT POWER

LIMITS

FCC §15.247

IC RSS-247 (5.4) (4)

For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Correlated Chains Directional Gain (dBi)
2.1	3.3	5.7

RESULTS

Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Max Power (dBm)
Low_1	2412	5.73	30.00	30	36	30.00
Low_2	2417	5.73	30.00	30	36	30.00
Mid	2437	5.73	30.00	30	36	30.00
High_9	2452	5.73	30.00	30	36	30.00
High_10	2457	5.73	30.00	30	36	30.00
High_11	2462	5.73	30.00	30	36	30.00
High_12	2467	5.73	30.00	30	36	30.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power
--------------------	------	--

Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Margi (dB)
Low_1	2412	13.53	13.61	16.58	30.00	-13.42
Low_2	2417	17.85	17.98	20.93	30.00	-9.07
Mid	2437	19.35	19.09	22.23	30.00	-7.77
High_9	2452	18.19	17.90	21.06	30.00	-8.94
High_10	2457	16.07	15.89	18.99	30.00	-11.01
High_11	2462	12.81	12.93	15.88	30.00	-14.12
High_12	2467	2.70	2.18	5.46	30.00	-24.54

8.22.5. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247

IC RSS-247 (5.2) (2)



For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 KHz band during any time interval of continuous transmissions.



RESULTS



PSD Results


Channel	Frequency (MHz)	Chain 0 Meas (dBm)	Chain 1 Meas (dBm)	Total Corr'd PSD (dBm)	Limit (dBm)	Margin (dB)
Low_1	2412	-14.24	-14.93	-11.56	8.0	-19.6
Low_2	2417	-10.31	-9.80	-7.04	9.0	-16.0
Mid	2437	-8.99	-8.40	-5.67	8.0	-13.7
High_9	2452	-10.03	-10.17	-7.09	8.0	-15.1
High_10	2457	-11.99	-11.46	-8.71	8.0	-16.7
High_11	2462	-15.77	-15.52	-12.63	8.0	-20.6
High_12	2467	-22.57	-23.62	-20.05	8.0	-28.1

PSD, Chain 0

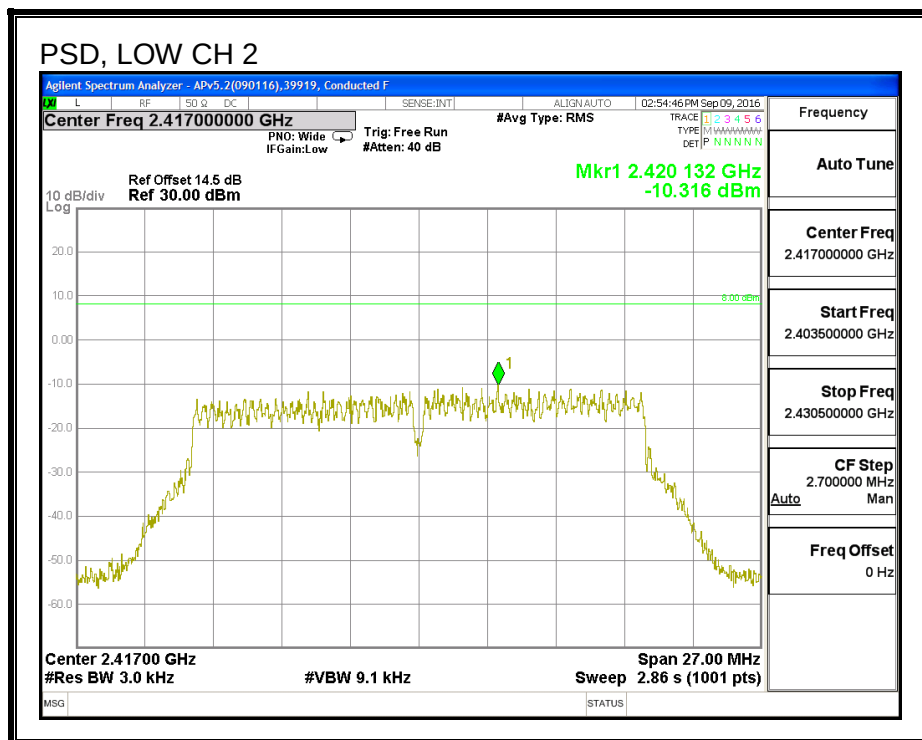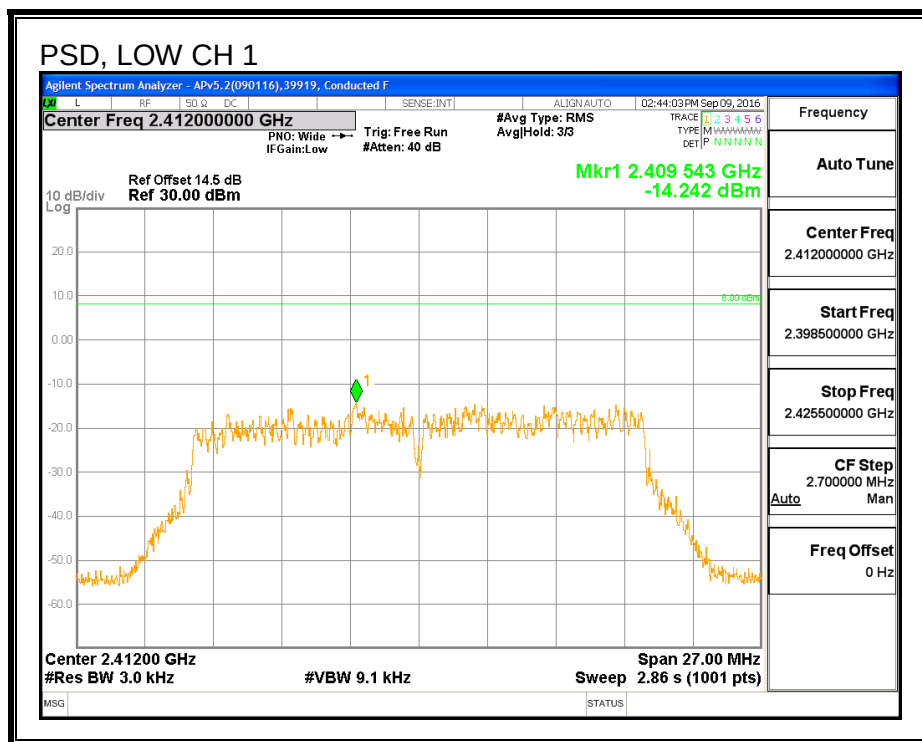


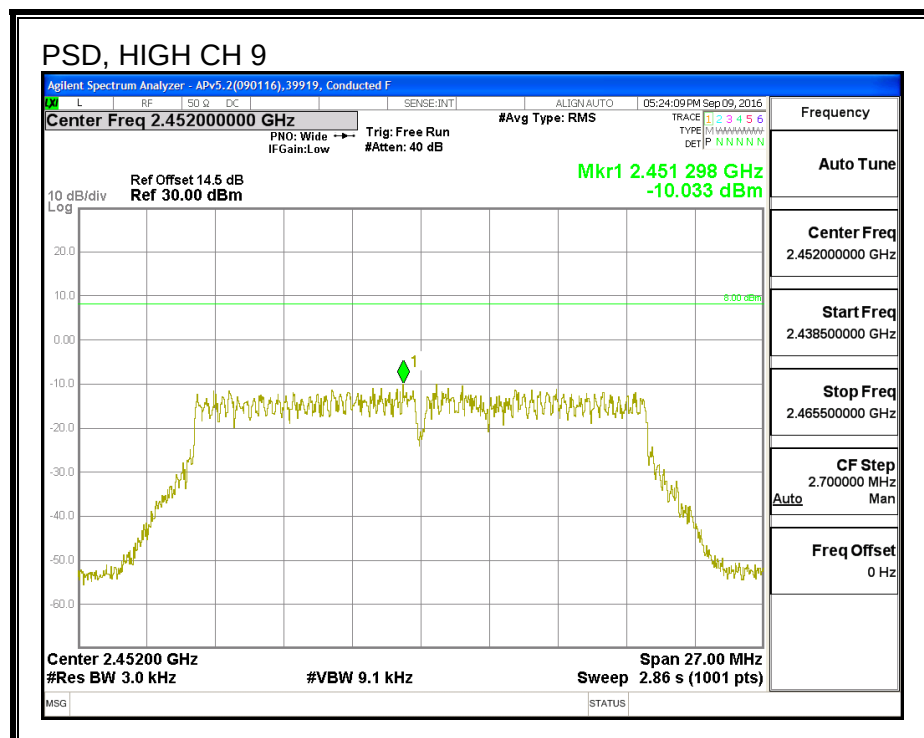
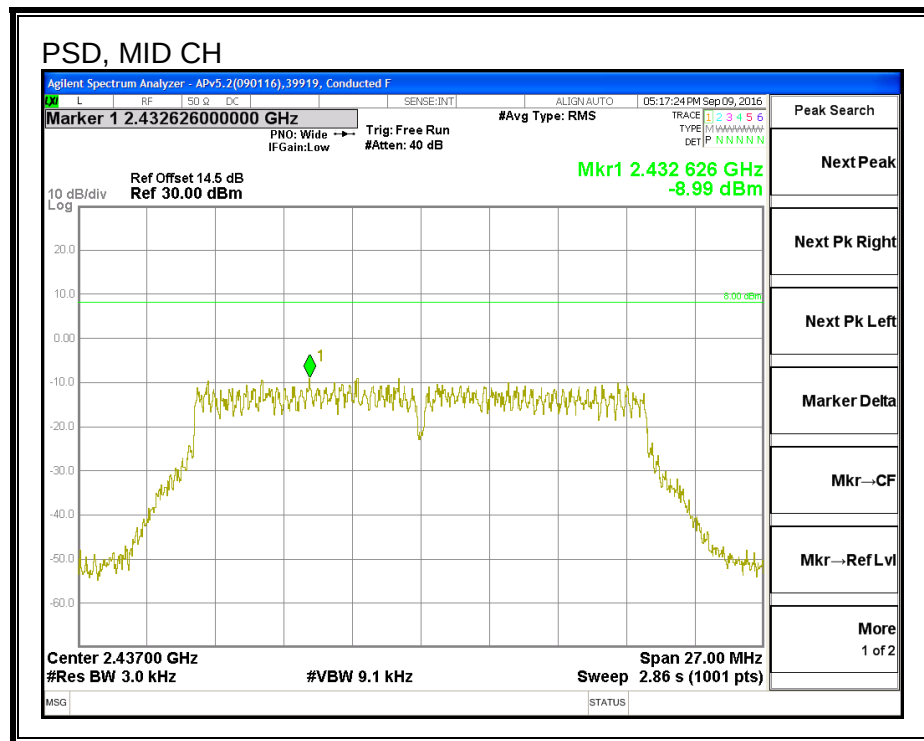


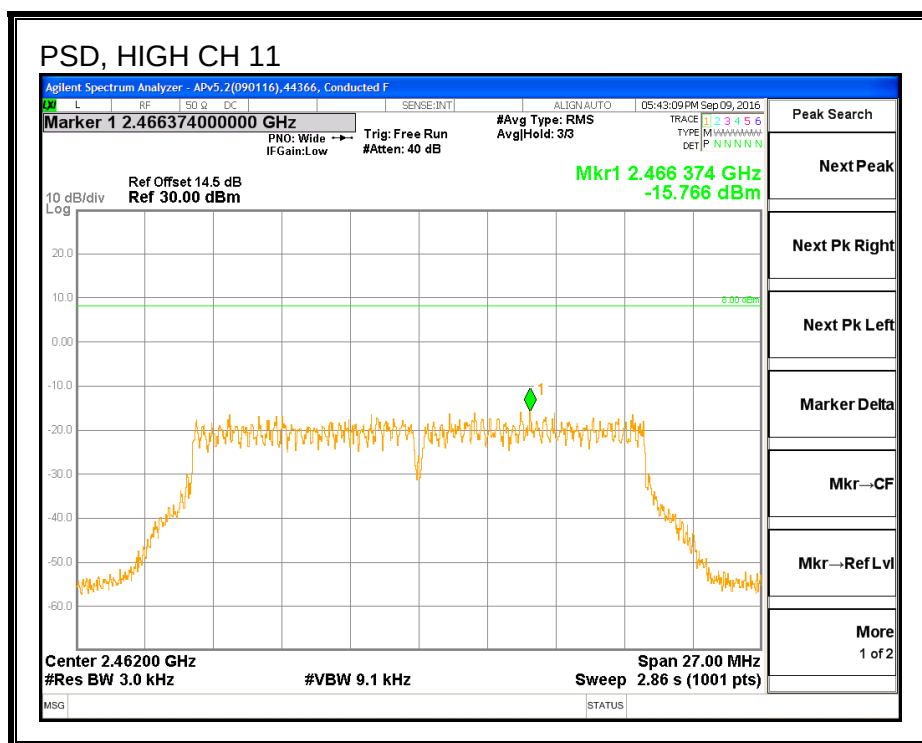
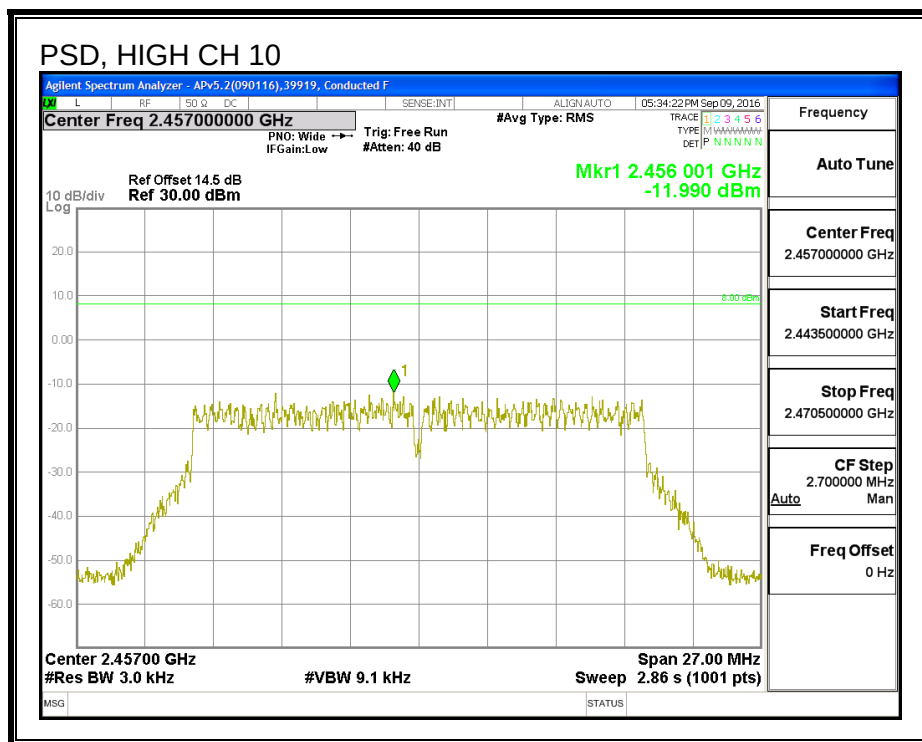



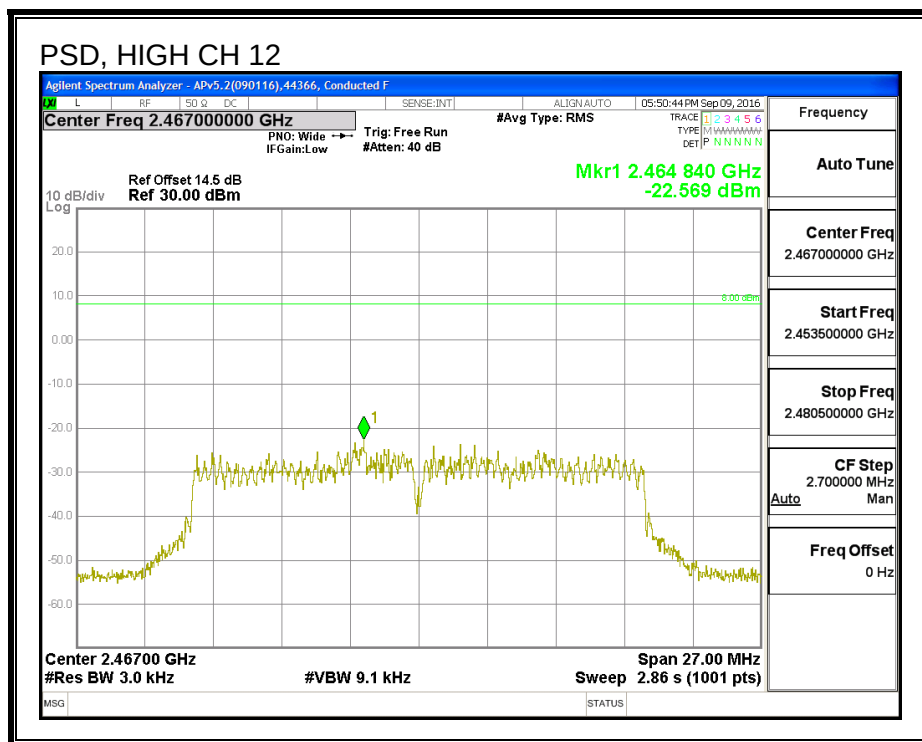


PSD, Chain 1

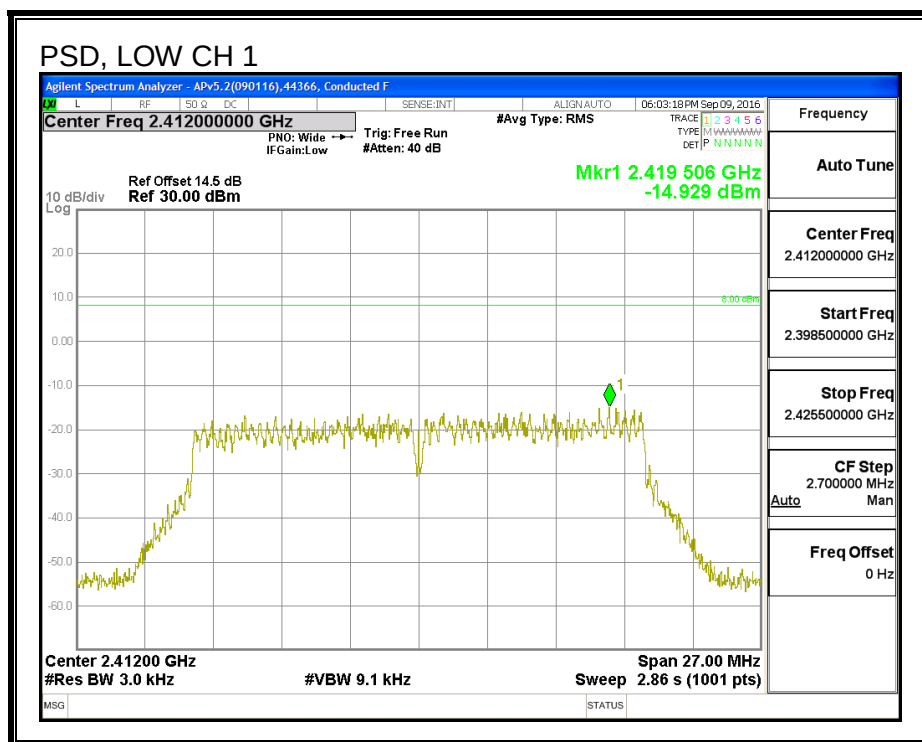

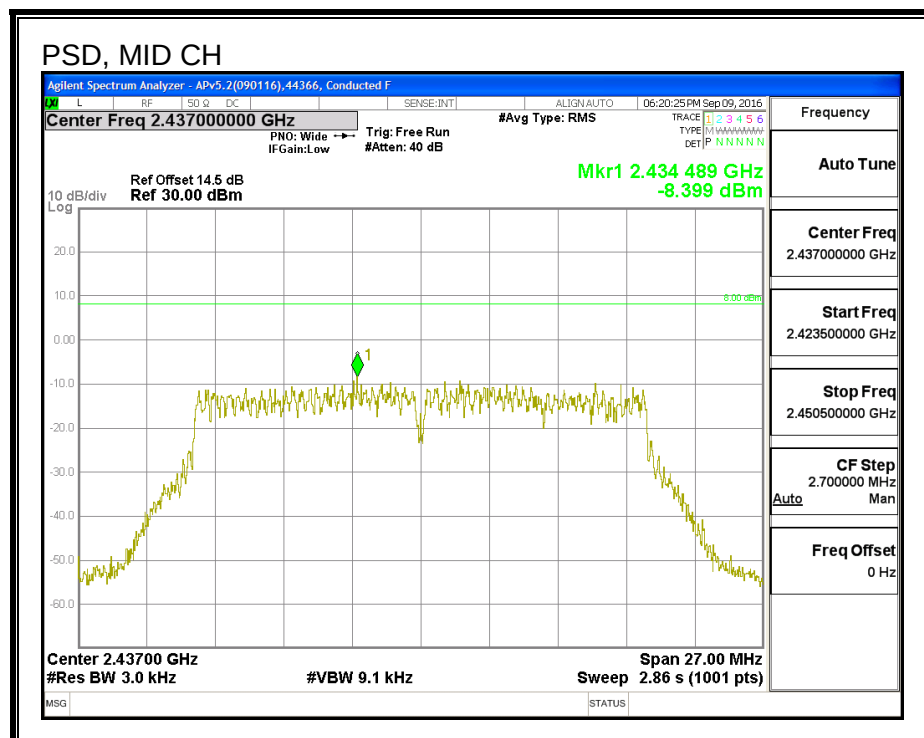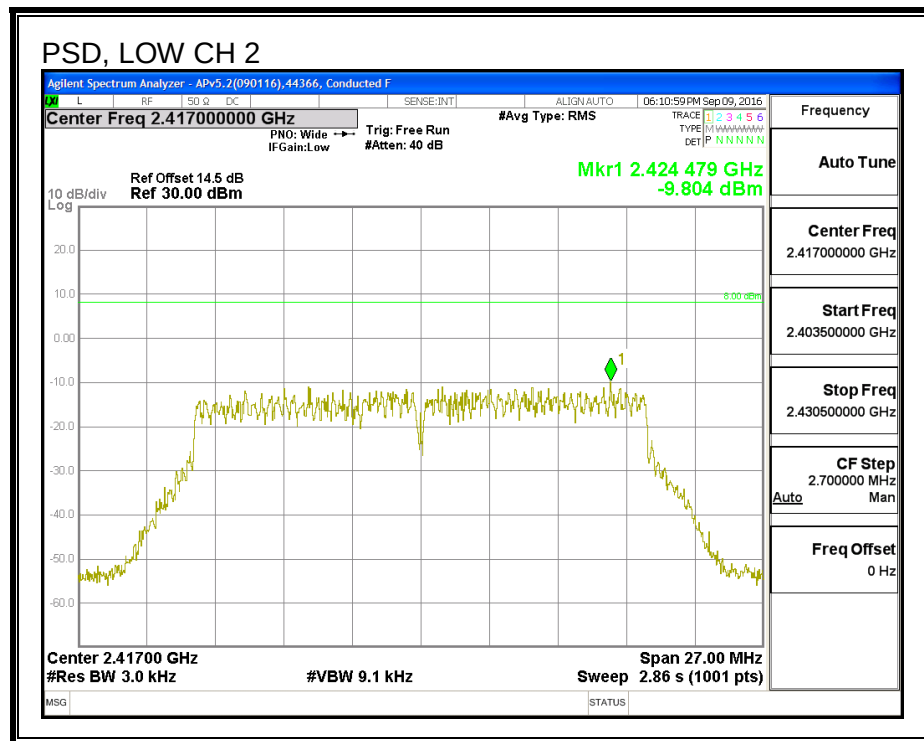

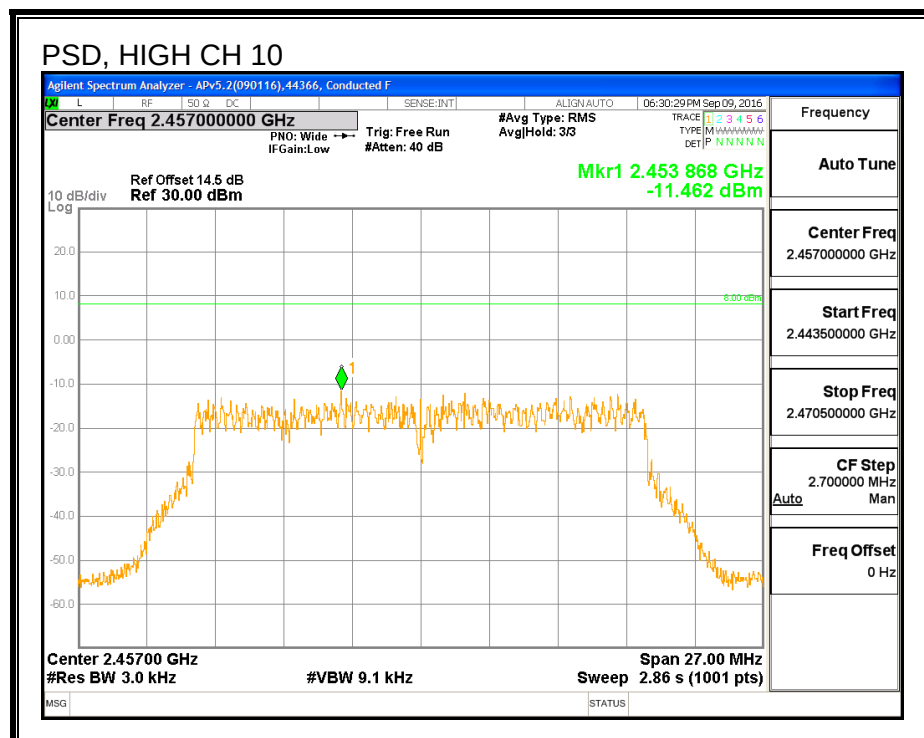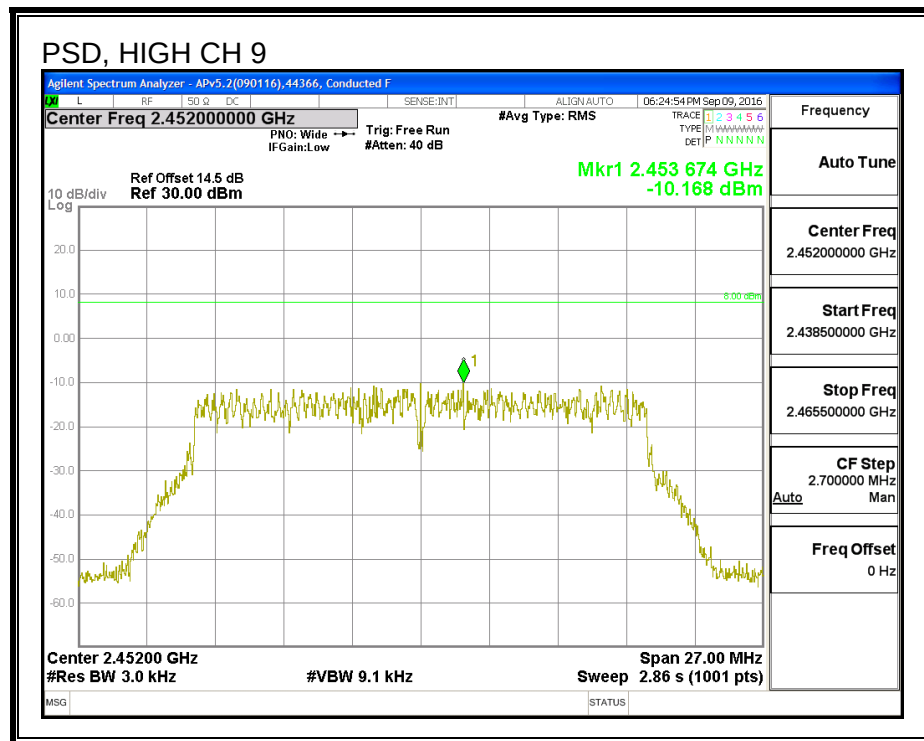

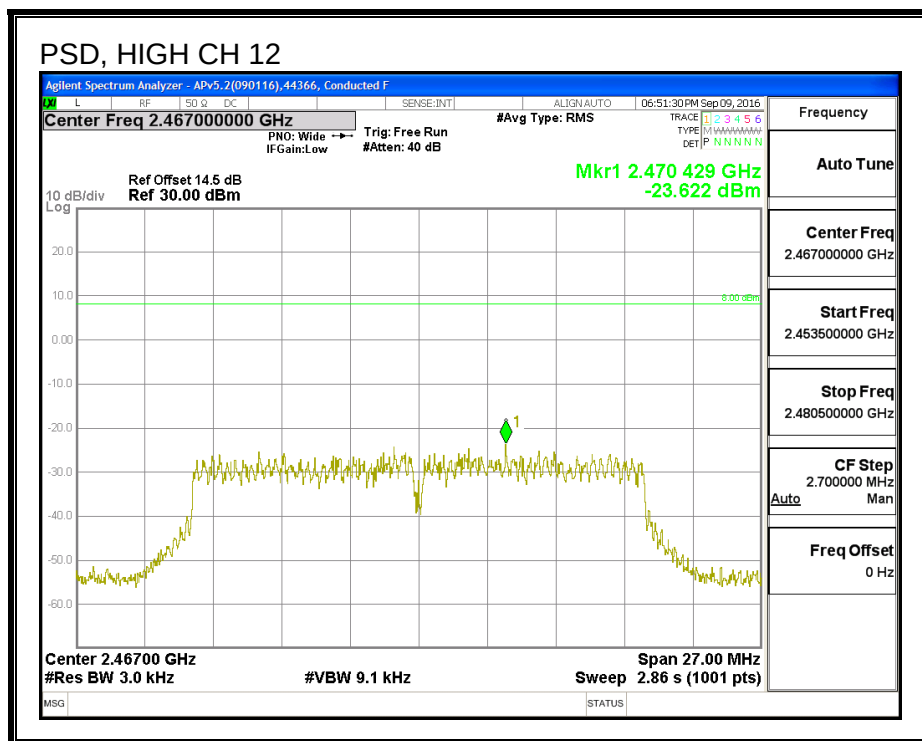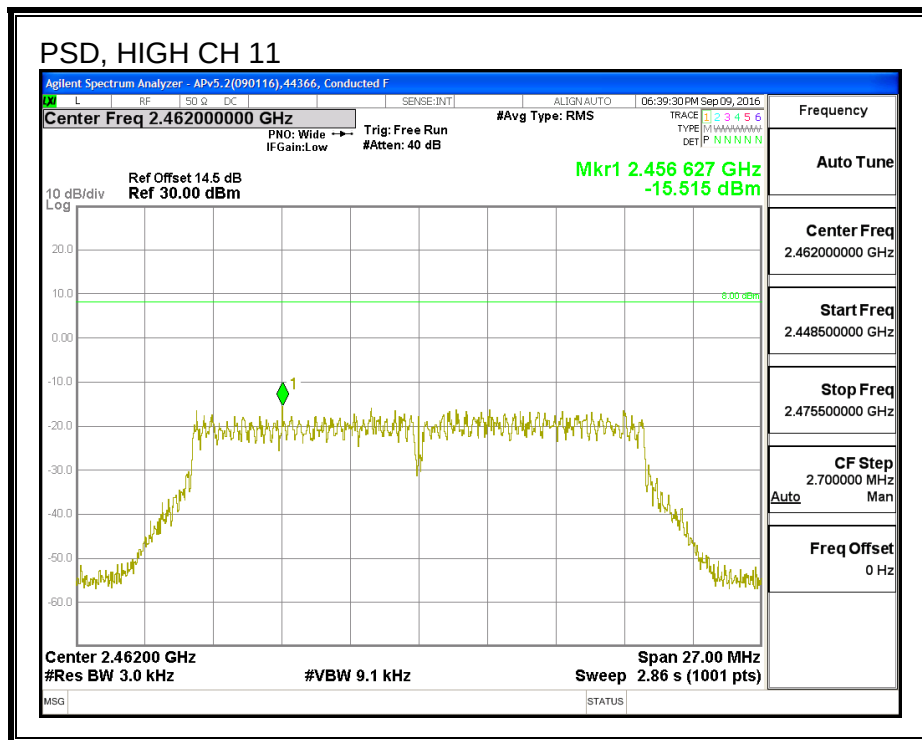

8.22.6. OUT-OF-BAND EMISSIONS

LIMITS



FCC §15.247 (d)

IC RSS-247 (5.5)


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

RESULTS


LOW CHANNEL BANDEDGE, Chain 0

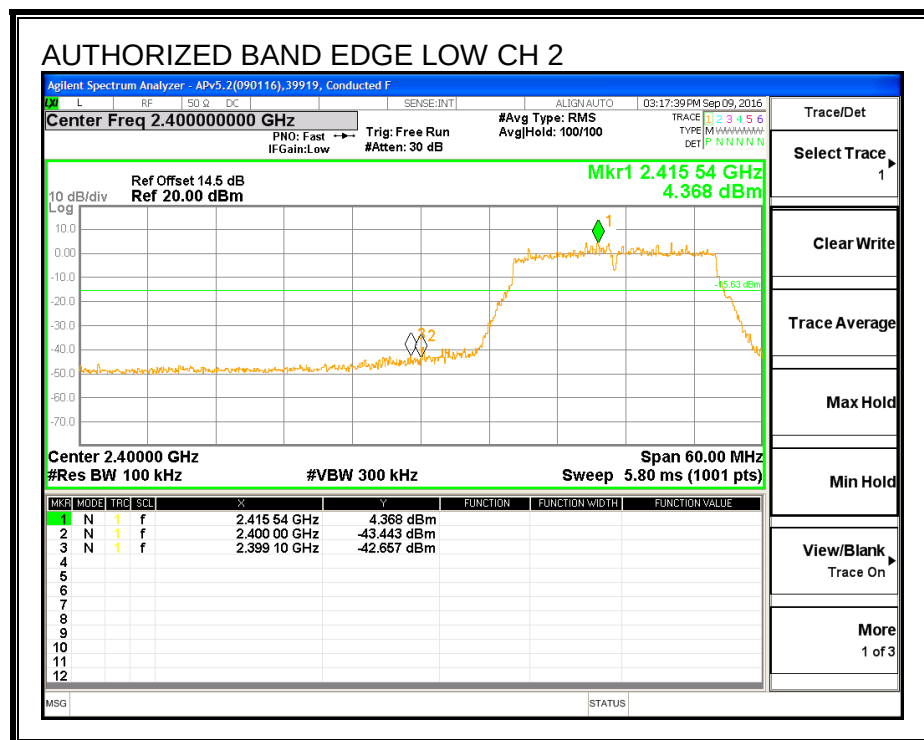
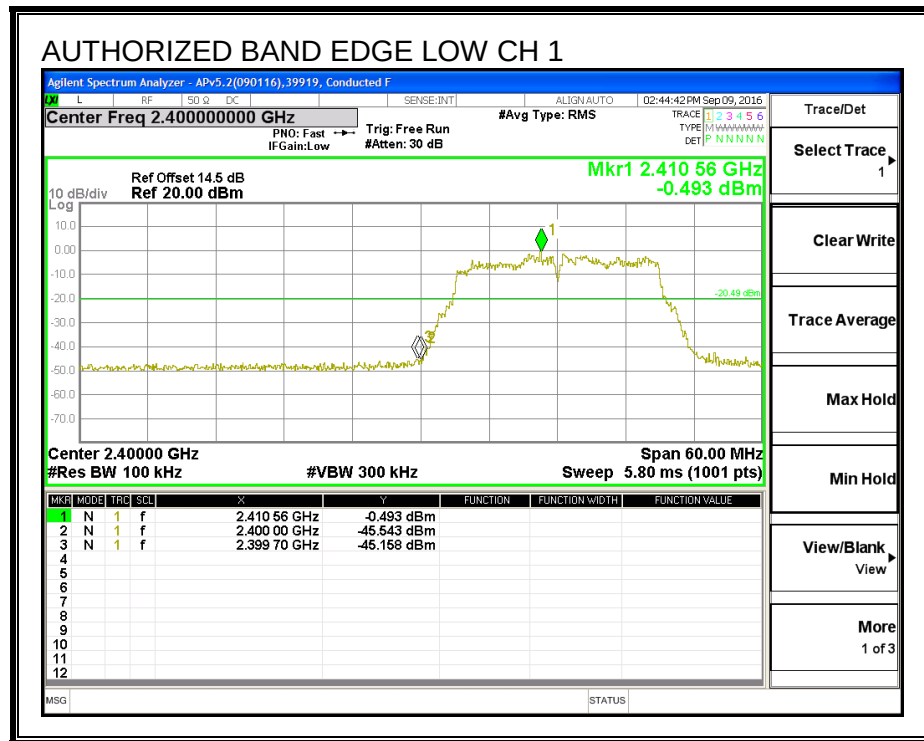



MID CHANNEL REFERENCE, Chain 0

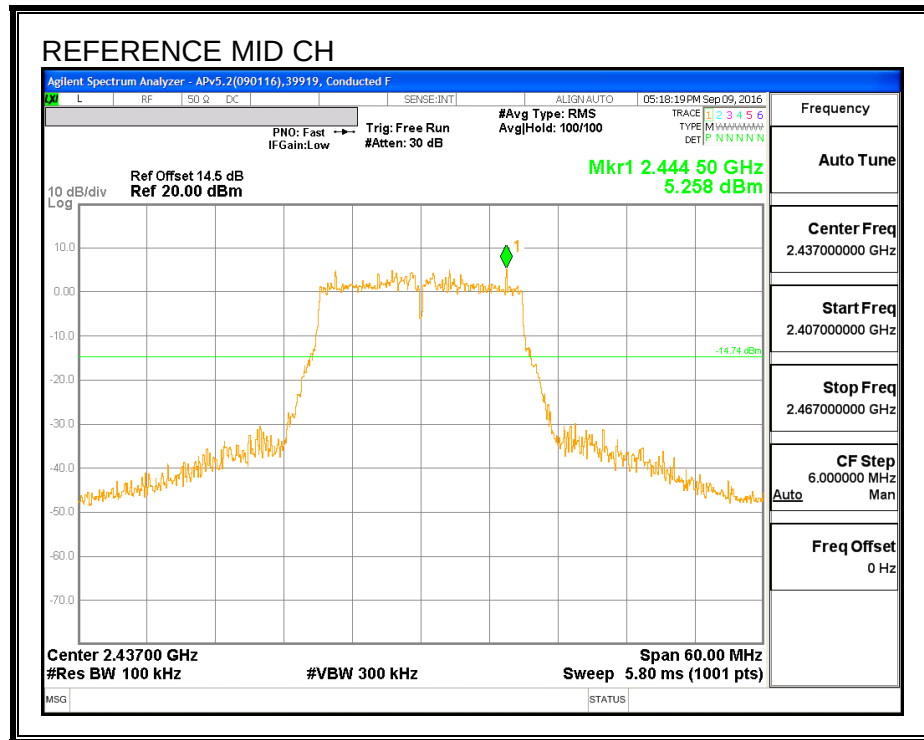


HIGH CHANNEL BANDEDGE, Chain 0


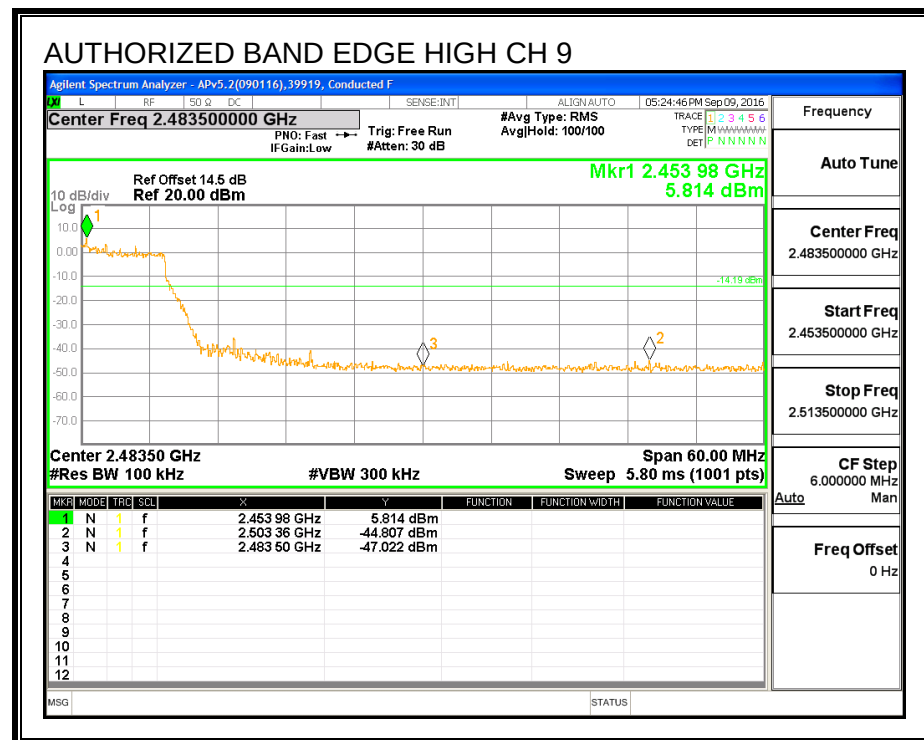


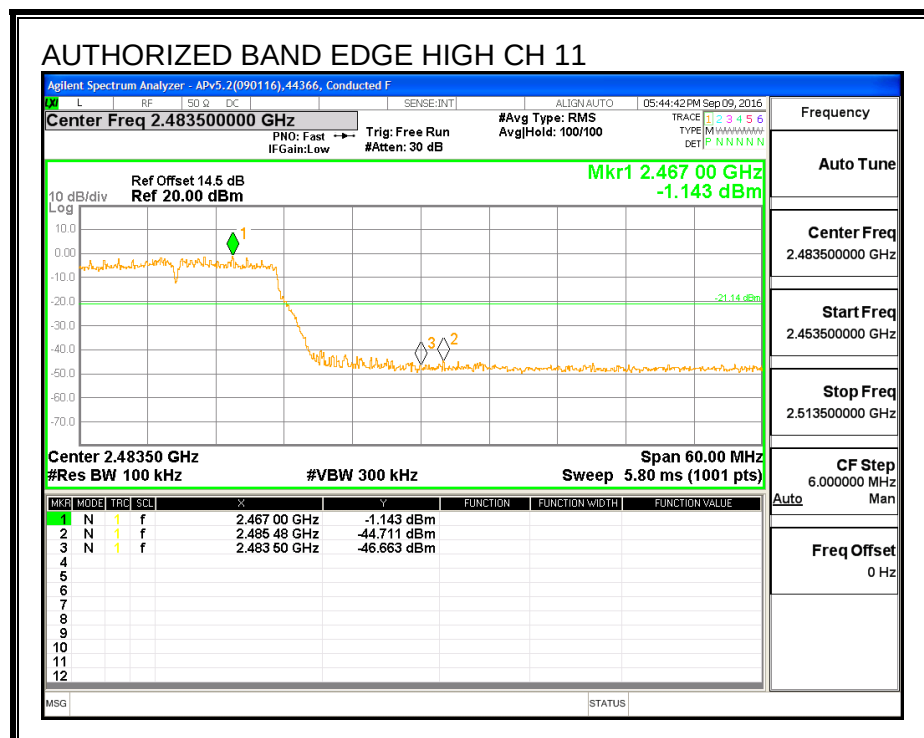
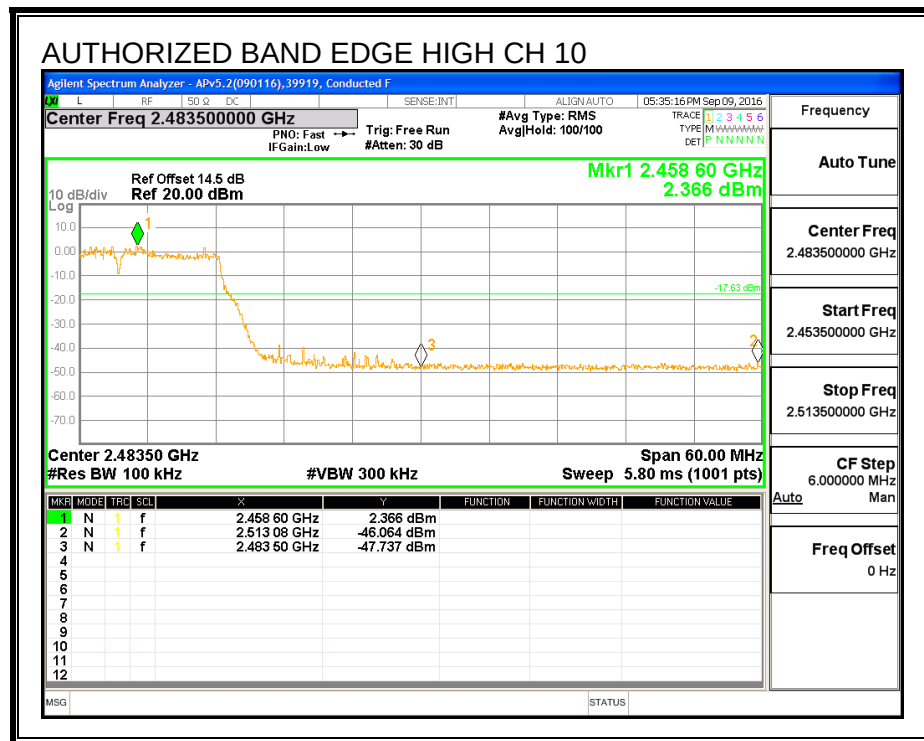



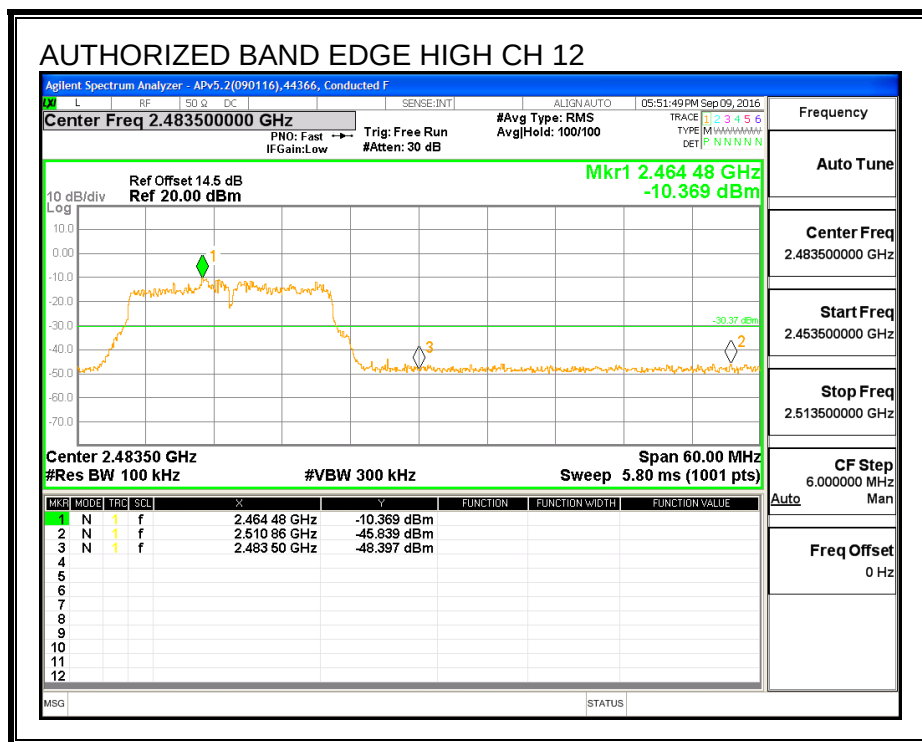


OUT-OF-BAND EMISSIONS, Chain 0


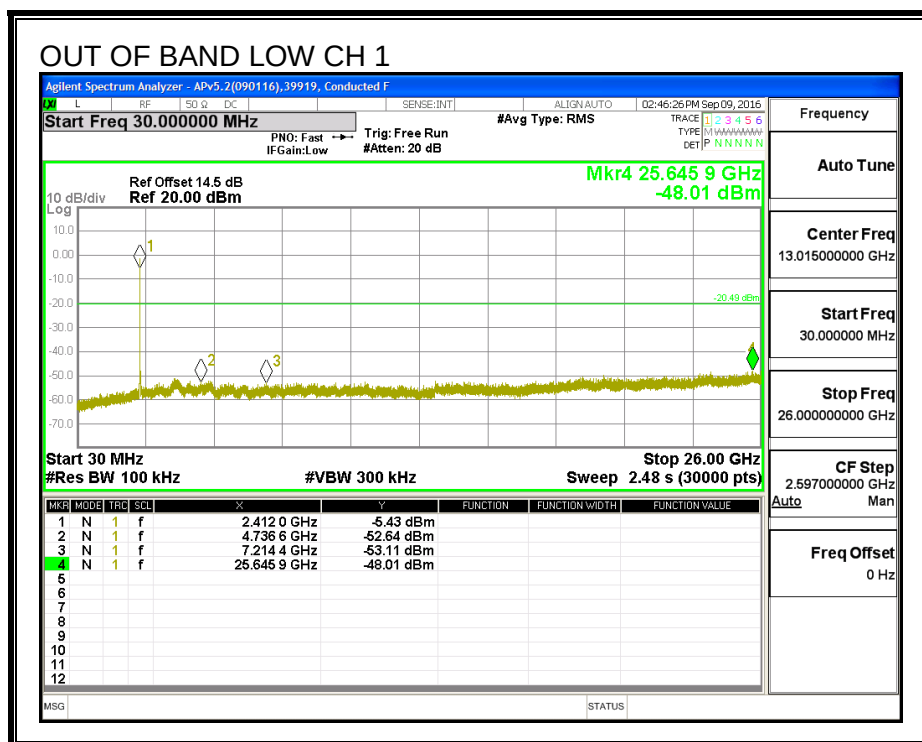


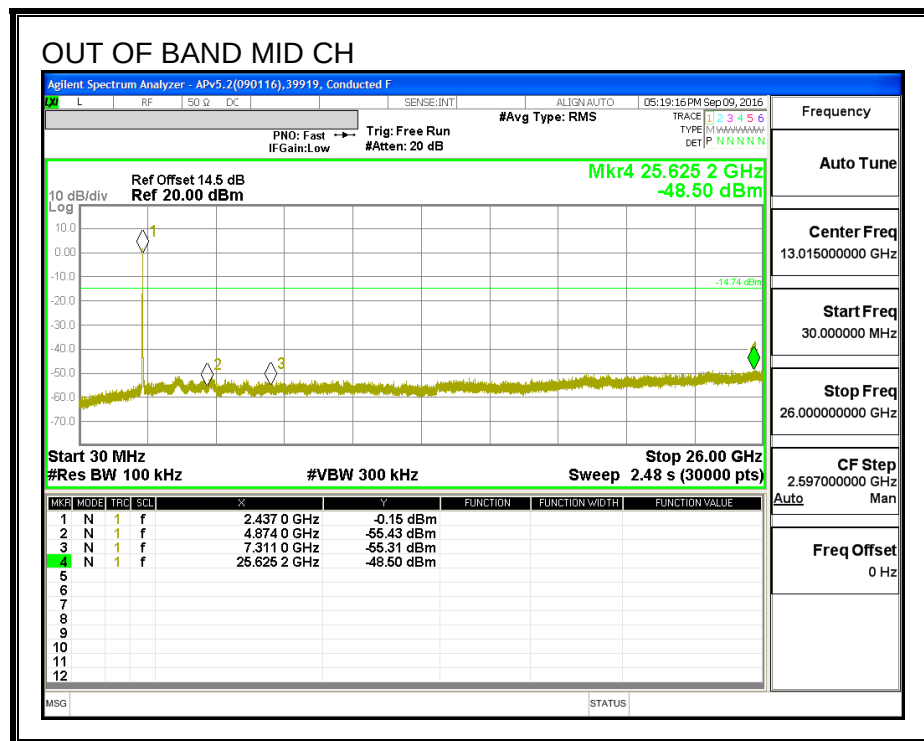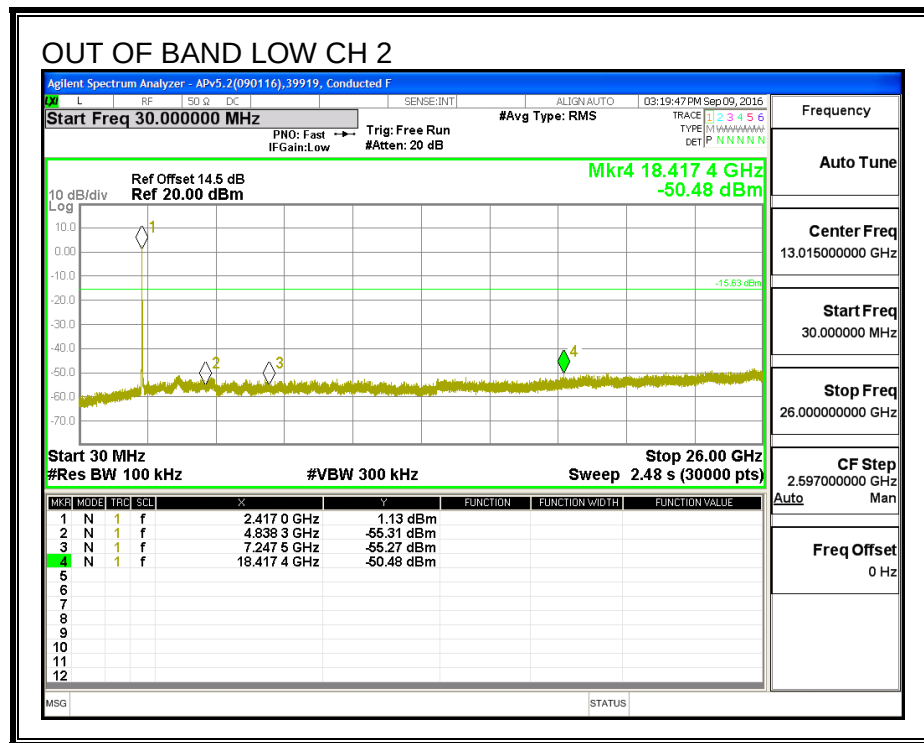

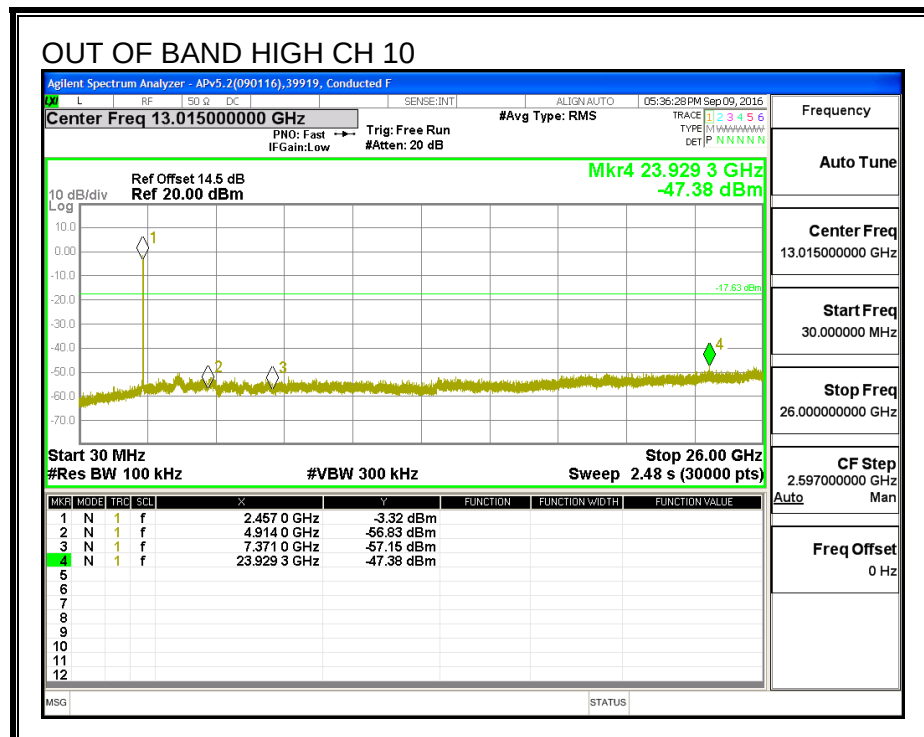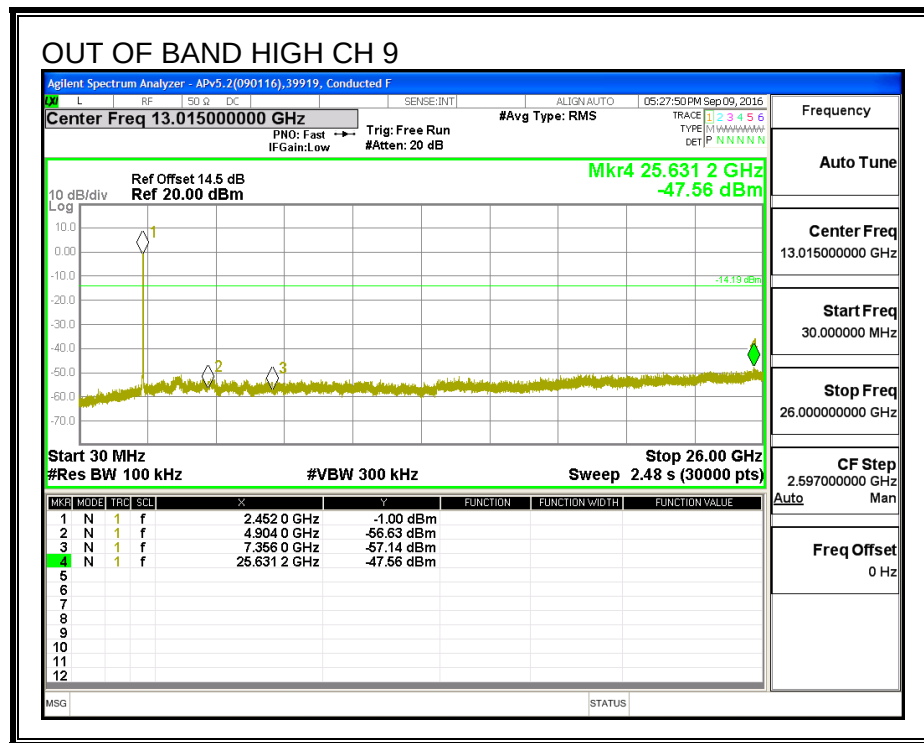


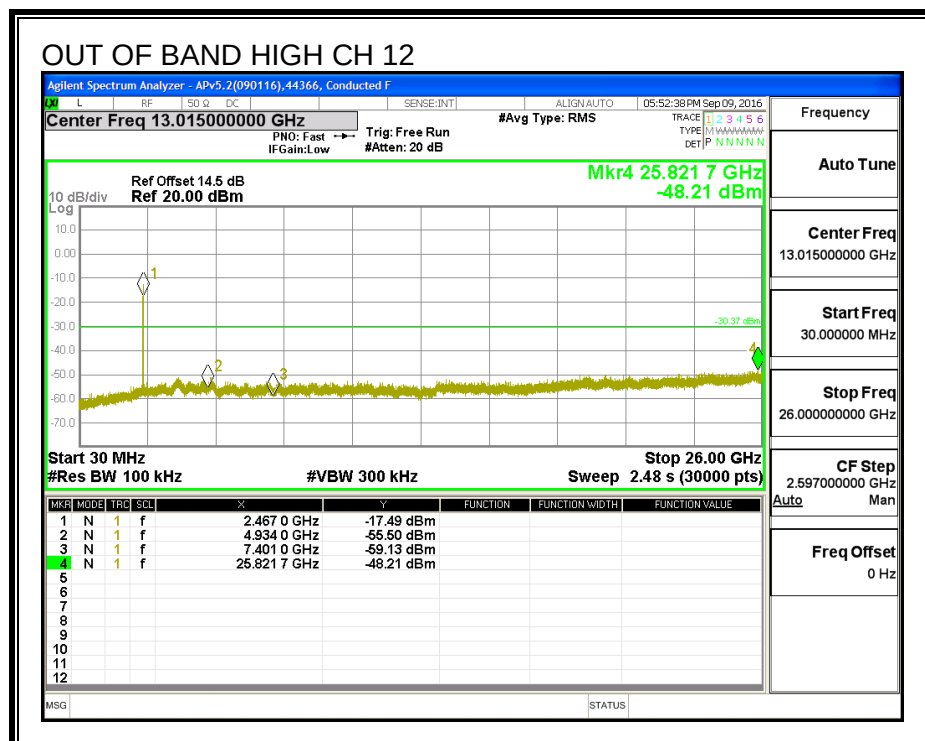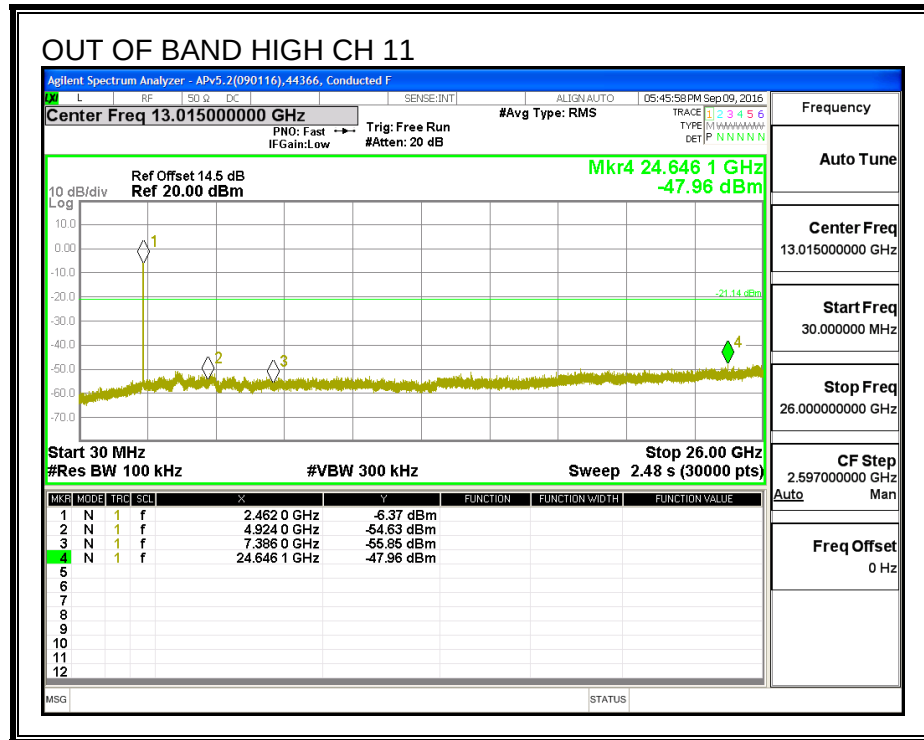


LOW CHANNEL BANDEDGE, Chain 1

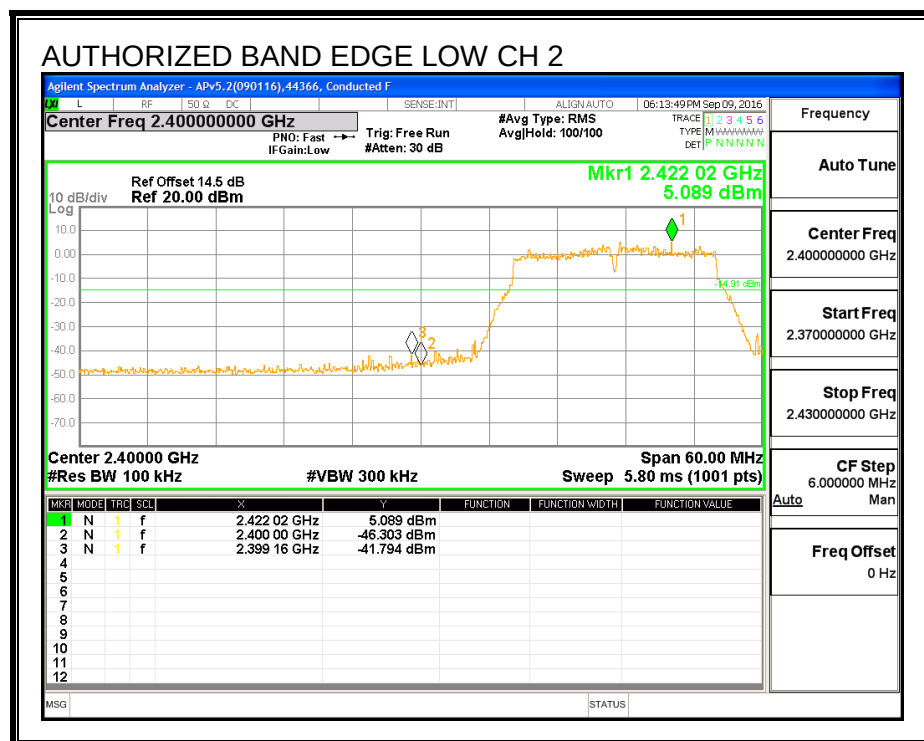
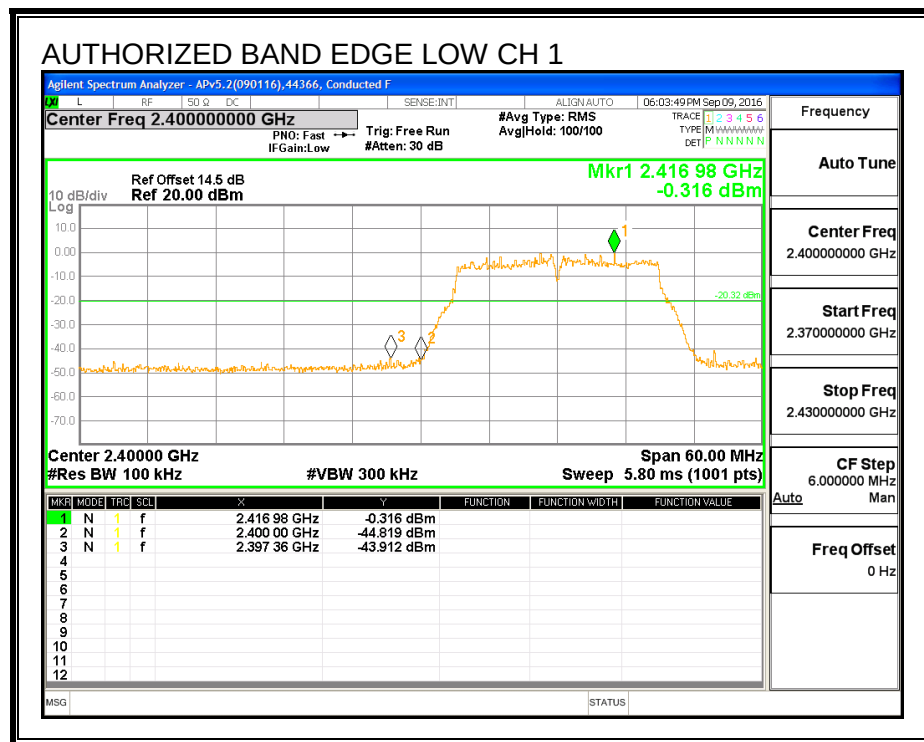



MID CHANNEL REFERENCE, Chain 1

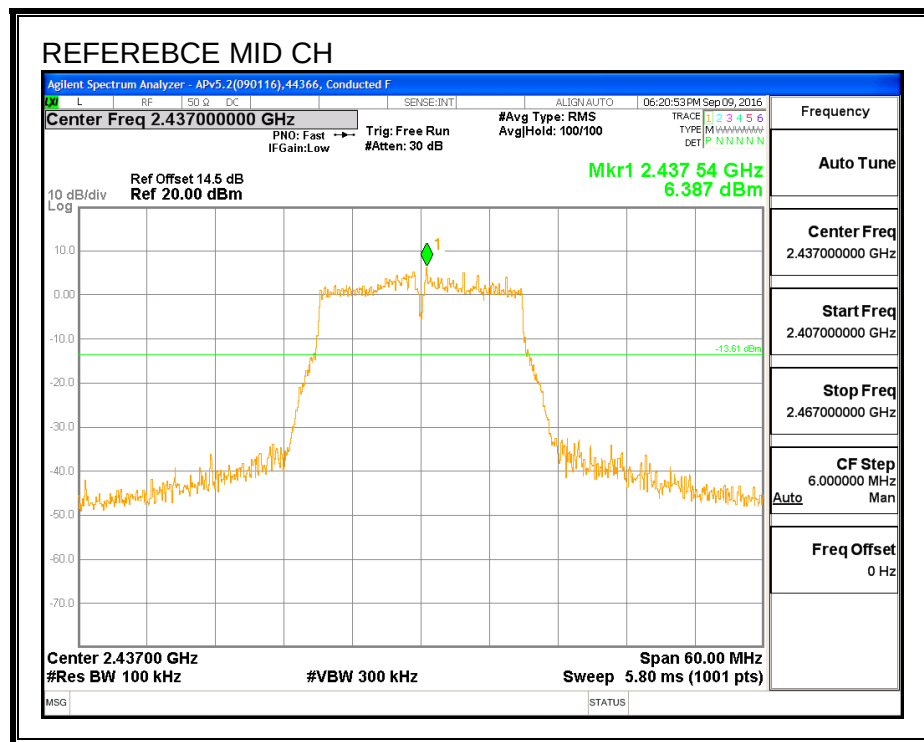


HIGH CHANNEL BANEDGE, Chain 1


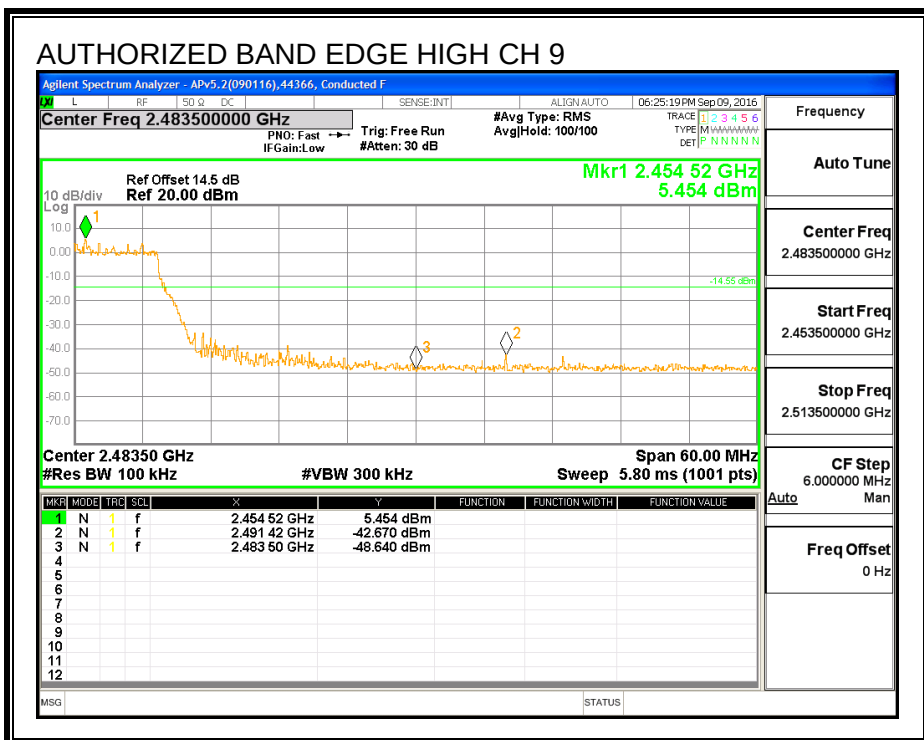


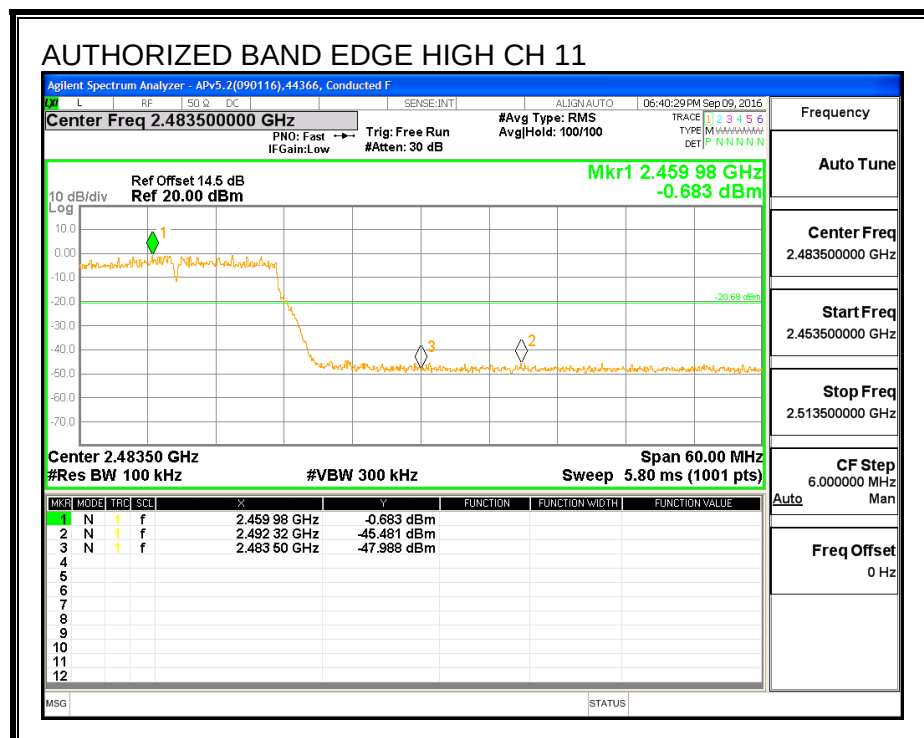
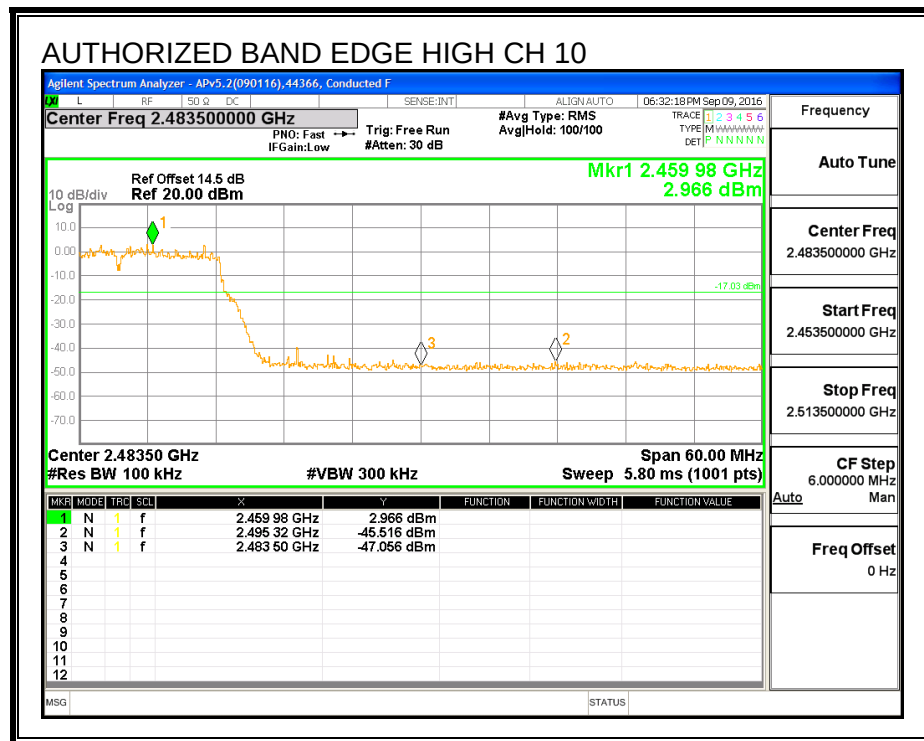


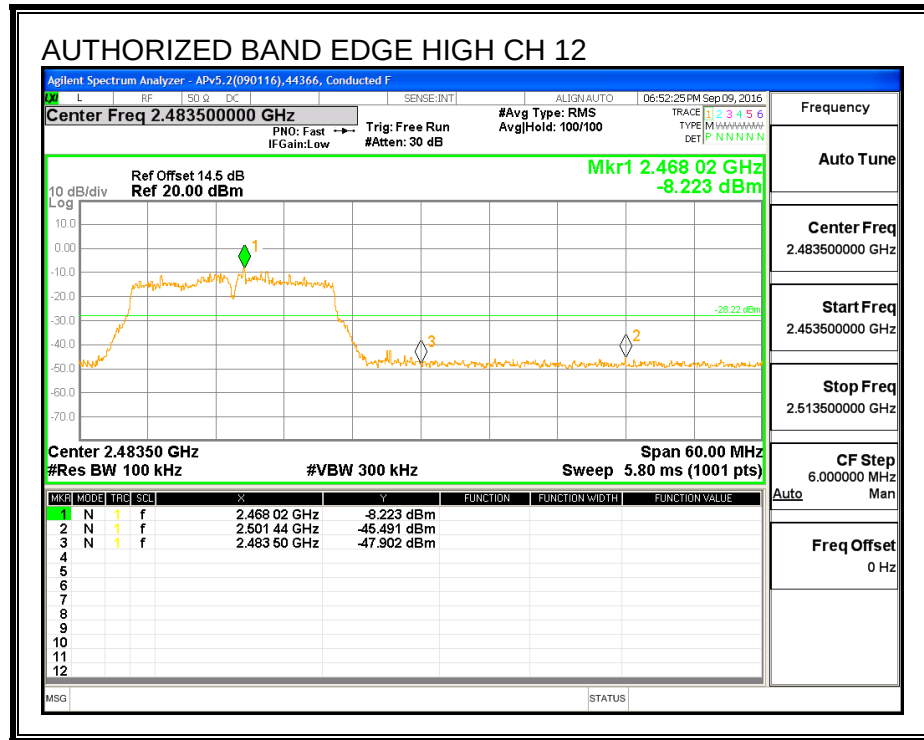


OUT-OF-BAND EMISSIONS, Chain 1

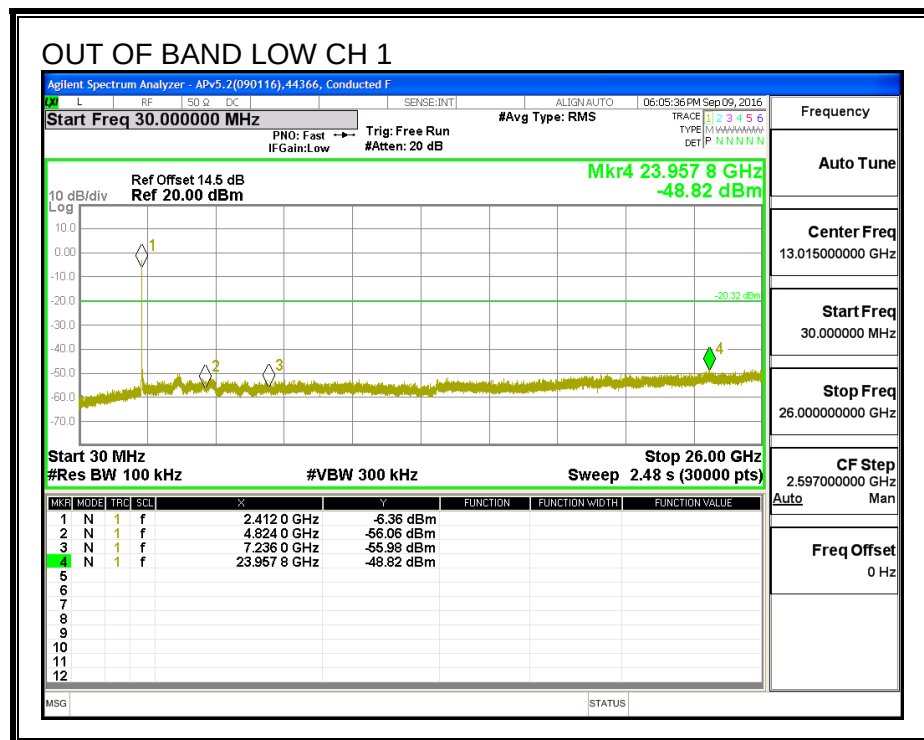

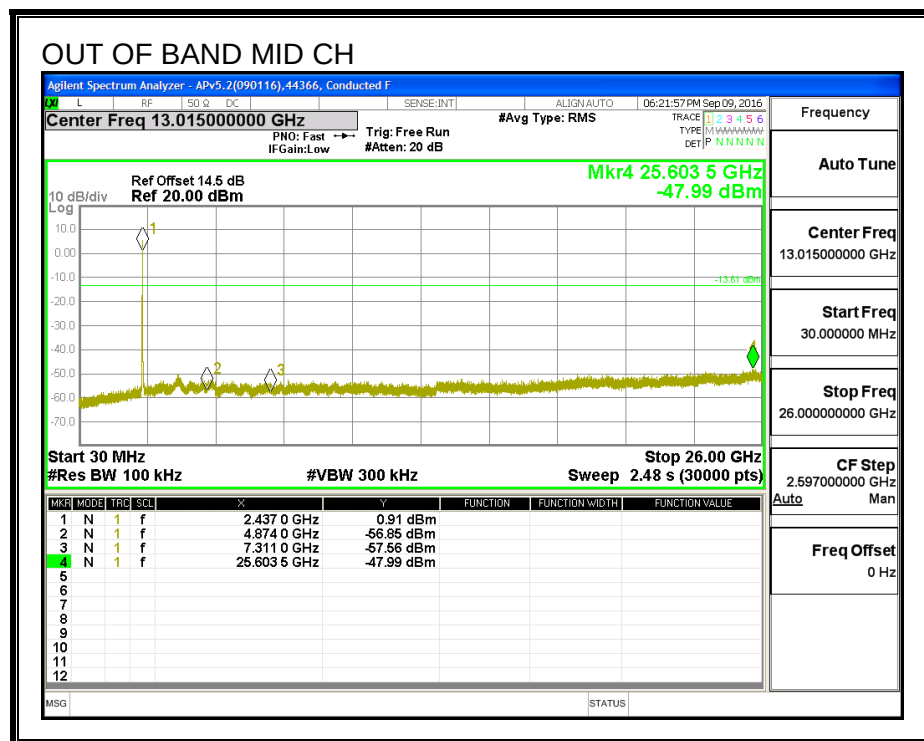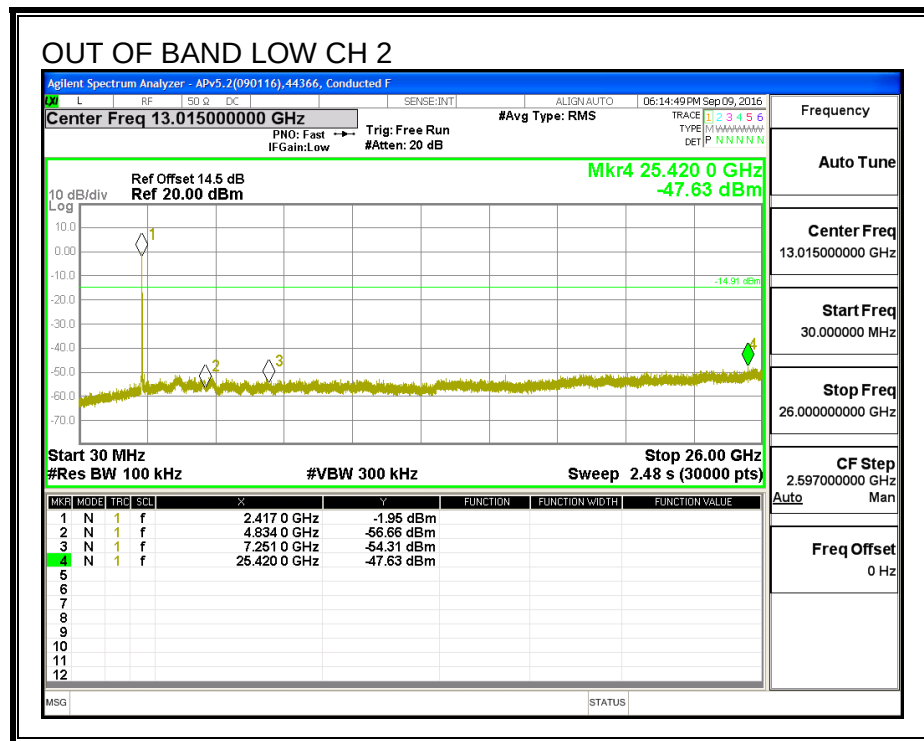

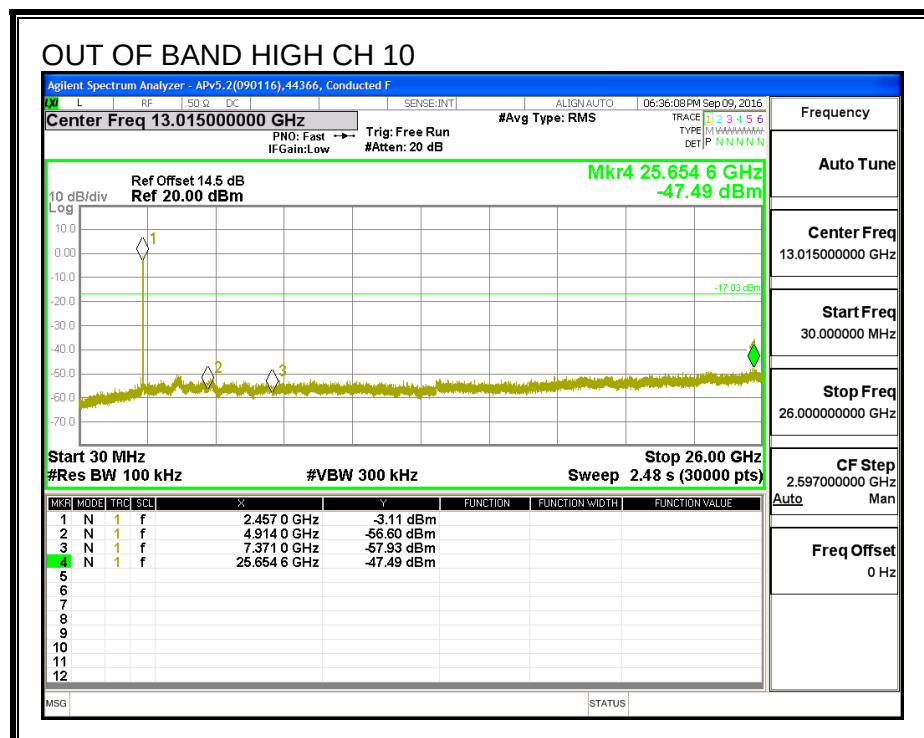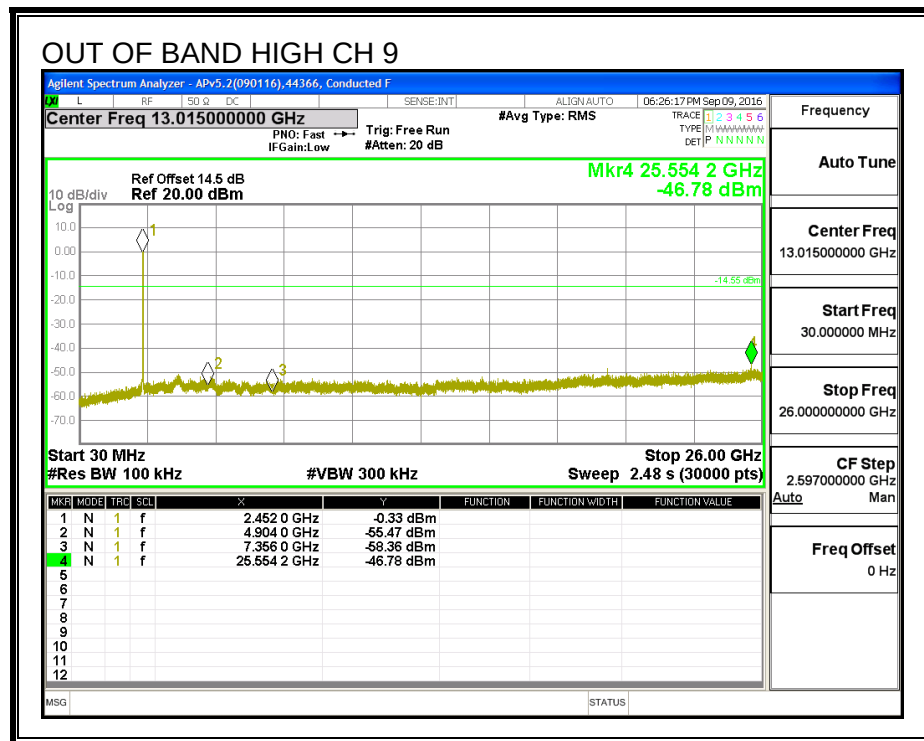

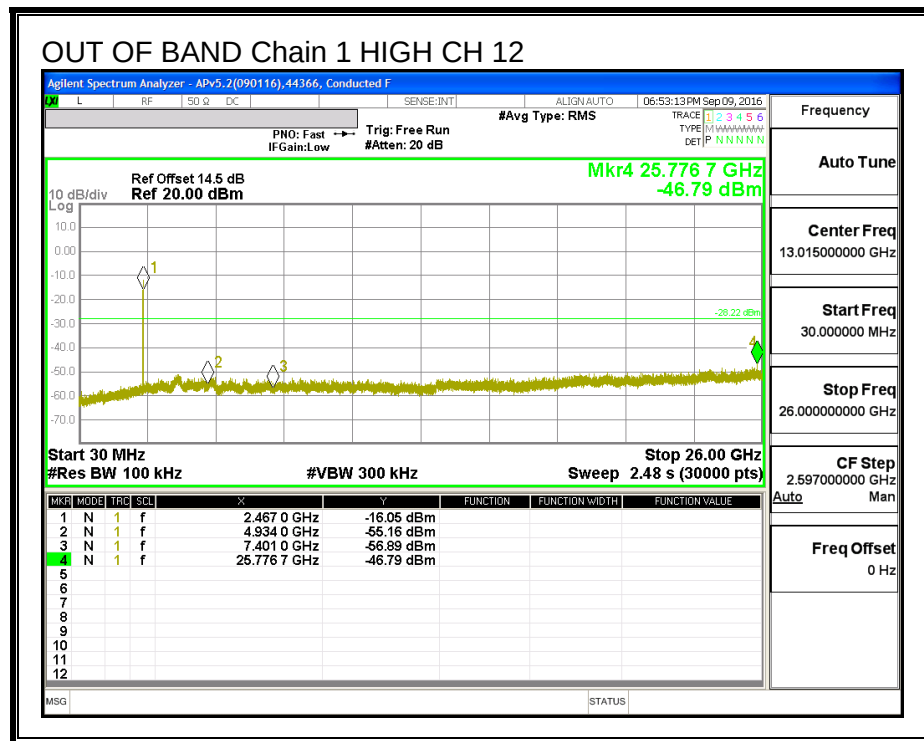

8.23. 802.11n 2Tx BEAM FORMING MODE IN THE 2.4 GHZ BAND, CHAIN 0+2

8.23.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)



IC RSS-247 (5.2) (1)



The minimum 6 dB bandwidth shall be at least 500 kHz.



RESULTS


Channel	Frequency (MHz)	6 dB BW Chain 0 (MHz)	6 dB BW Chain 2 (MHz)	Minimum Limit (MHz)
Low_1	2412	17.712	17.604	0.5
Low_2	2417	17.604	17.212	0.5
Mid	2437	17.577	17.550	0.5
High_9	2452	17.604	17.604	0.5
High_10	2457	17.631	17.604	0.5
High_11	2462	17.631	17.658	0.5
High_12	2467	17.604	17.604	0.5

6 dB BANDWIDTH, Chain 0

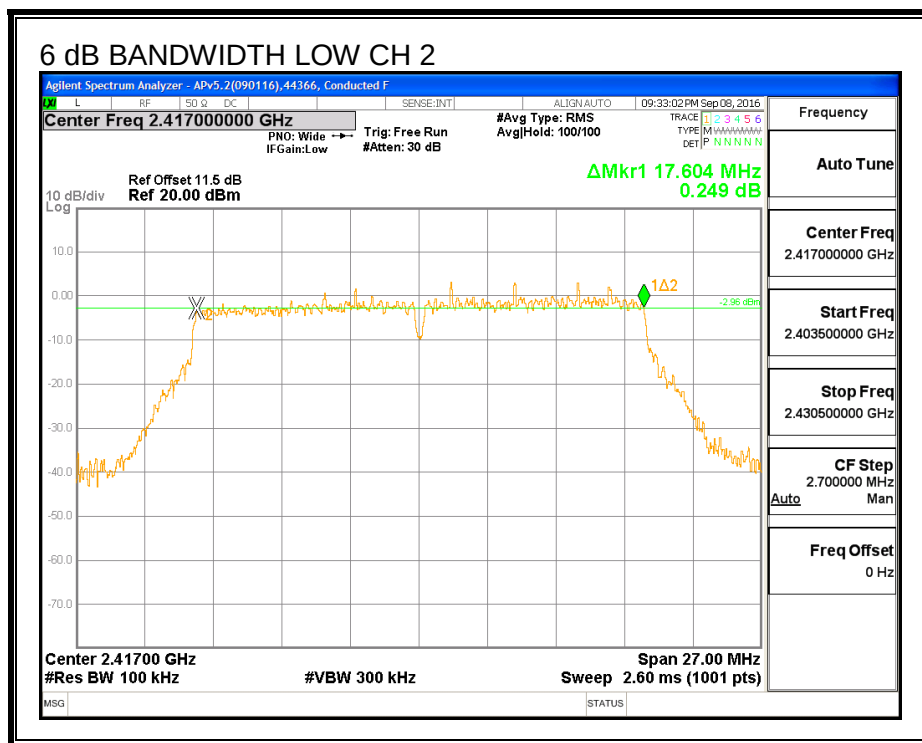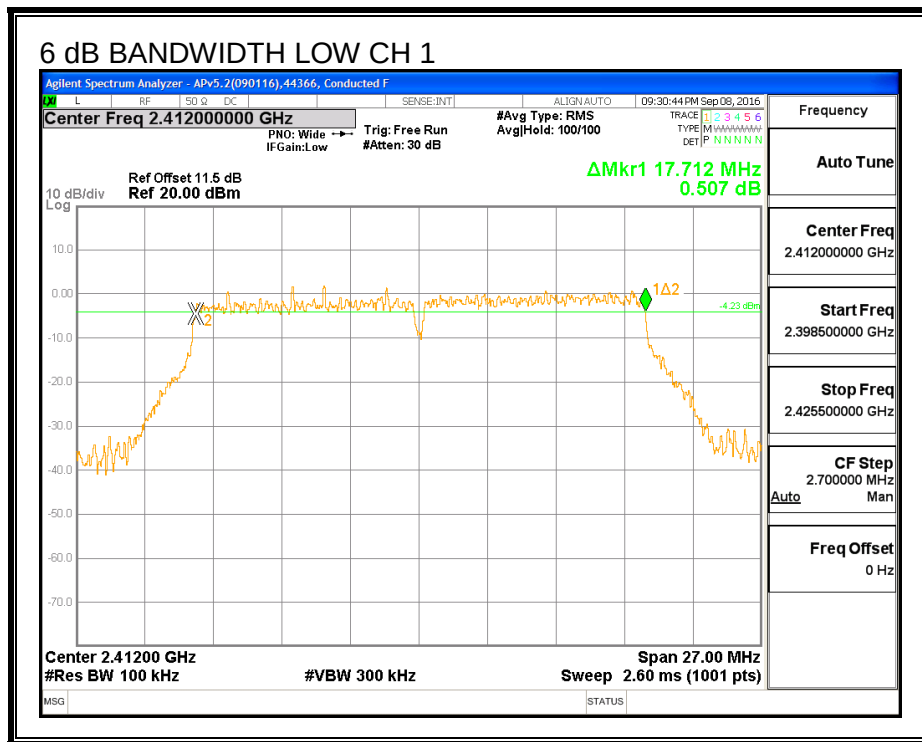


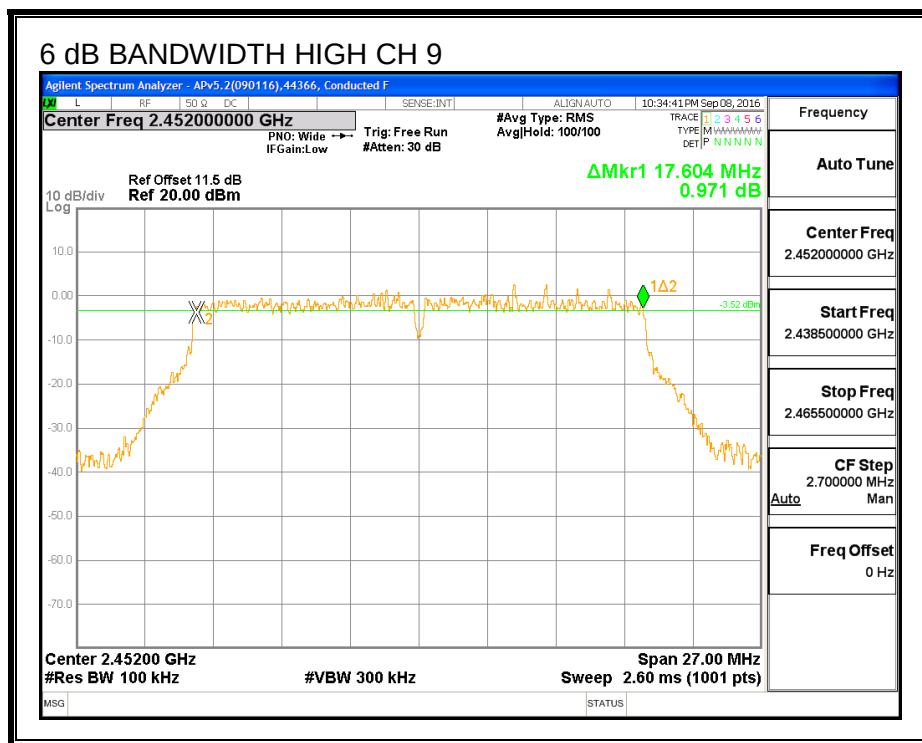
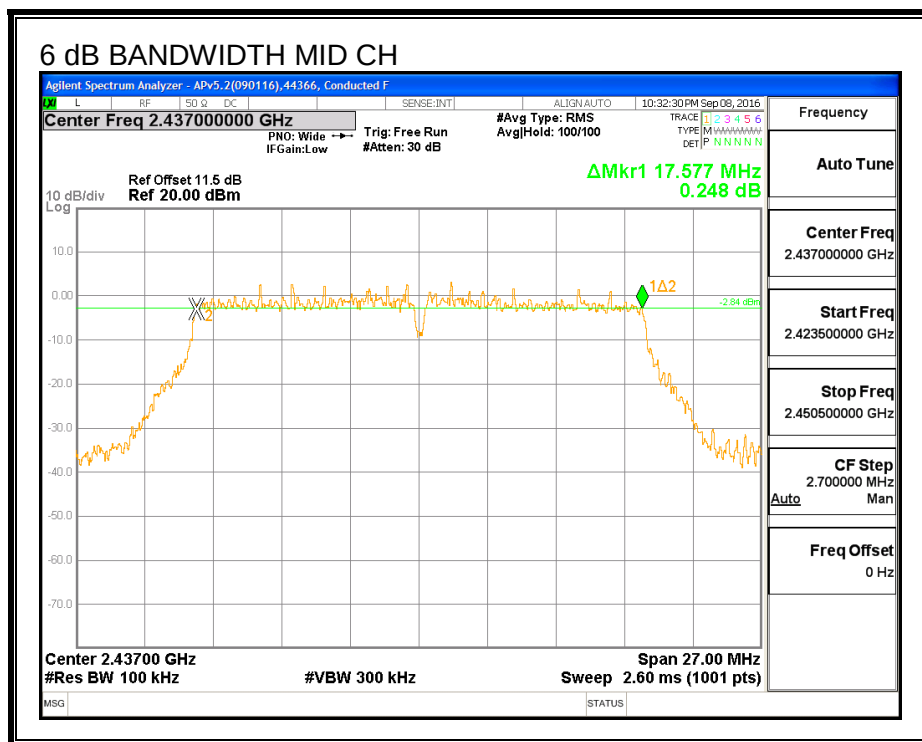


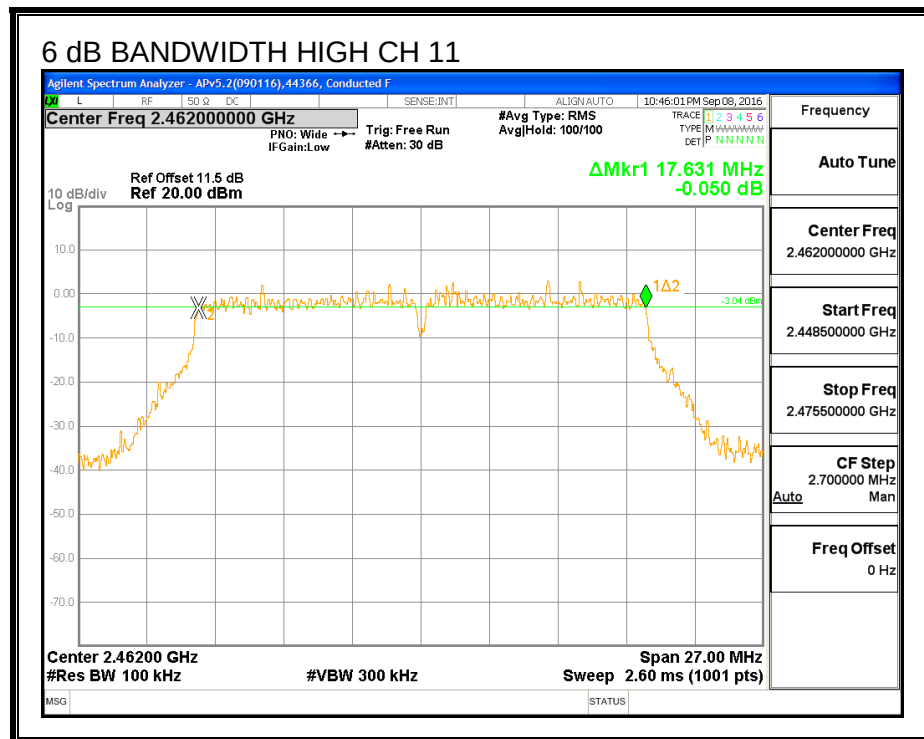
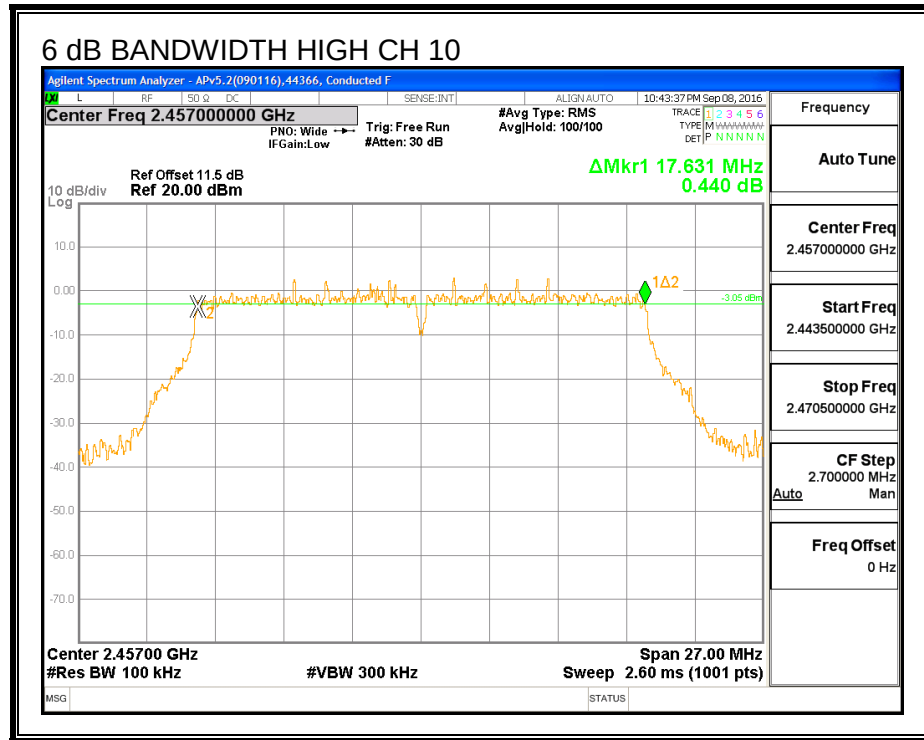



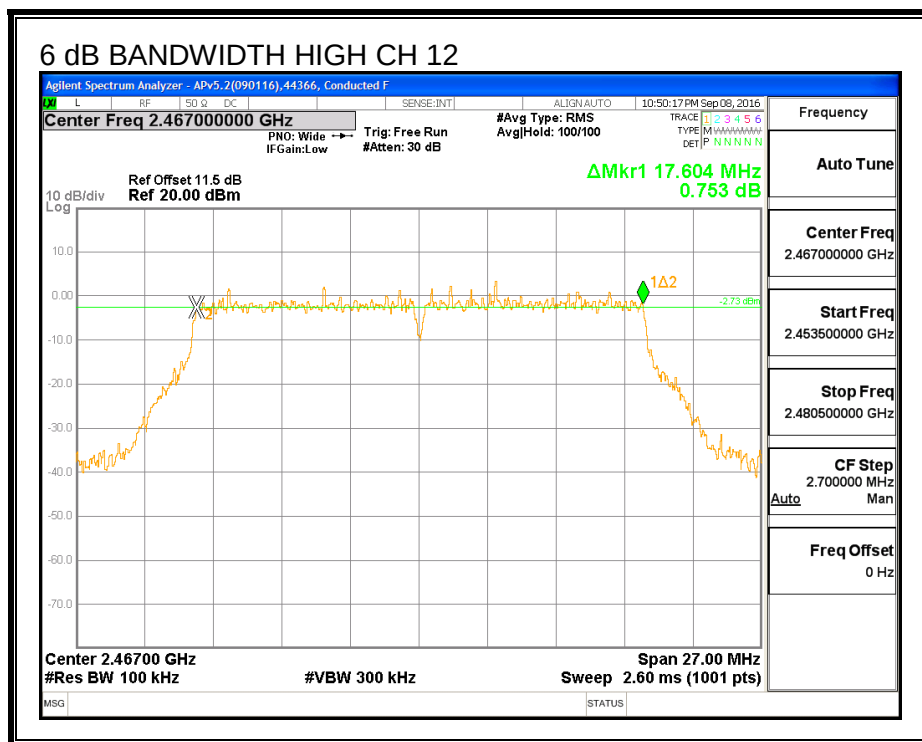


6 dB BANDWIDTH, Chain 2

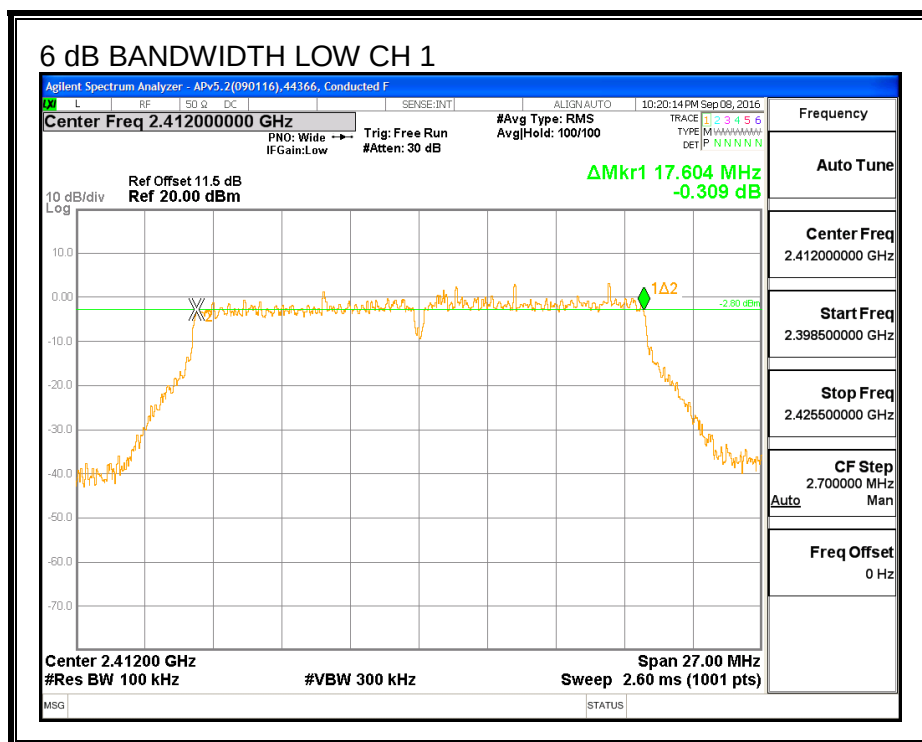

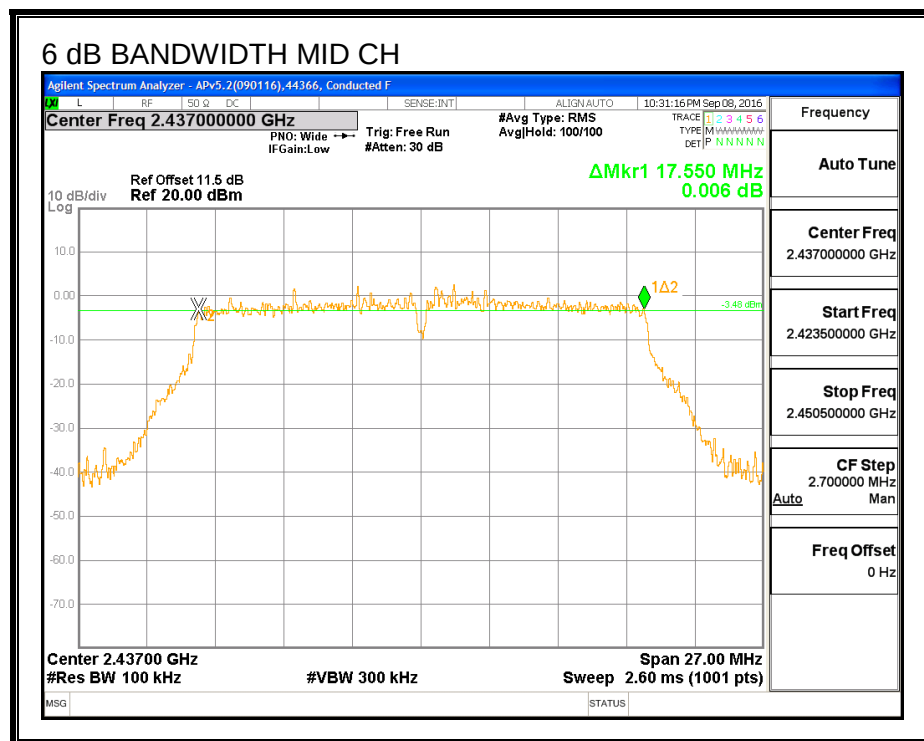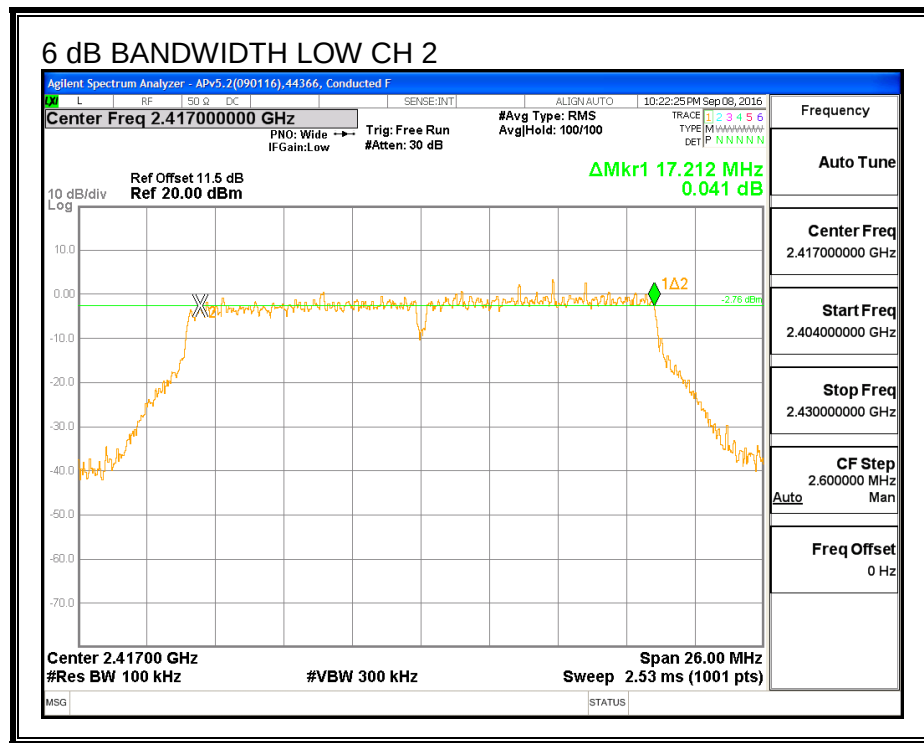

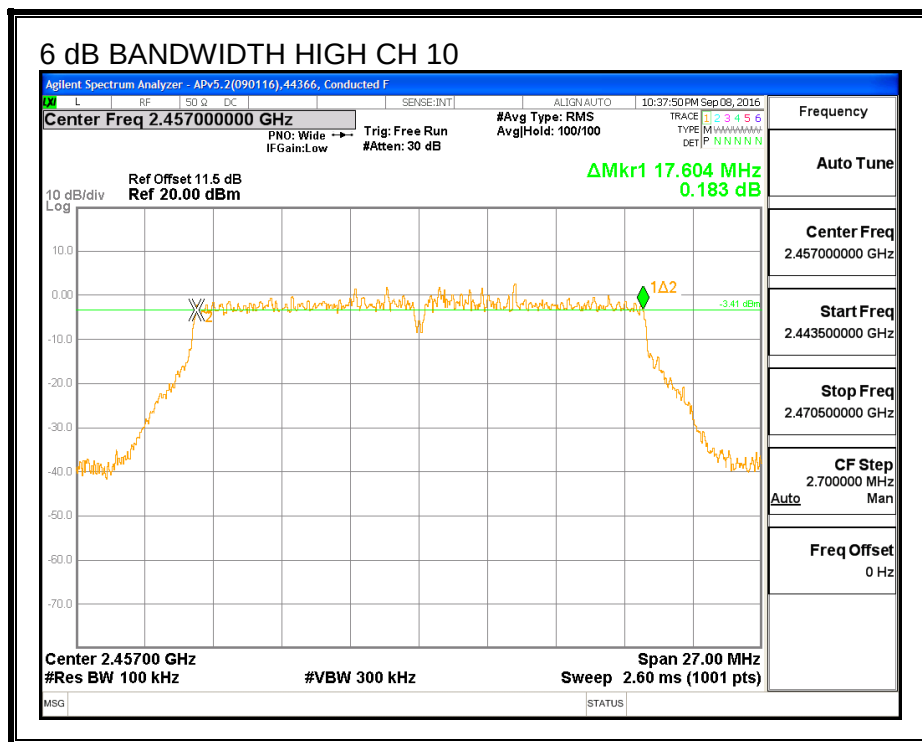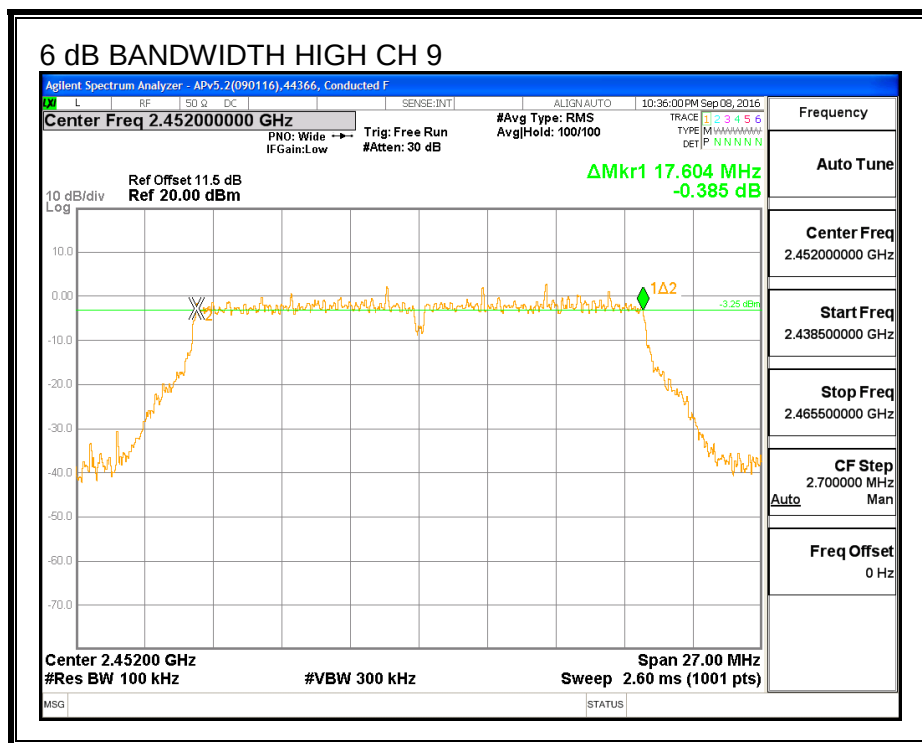

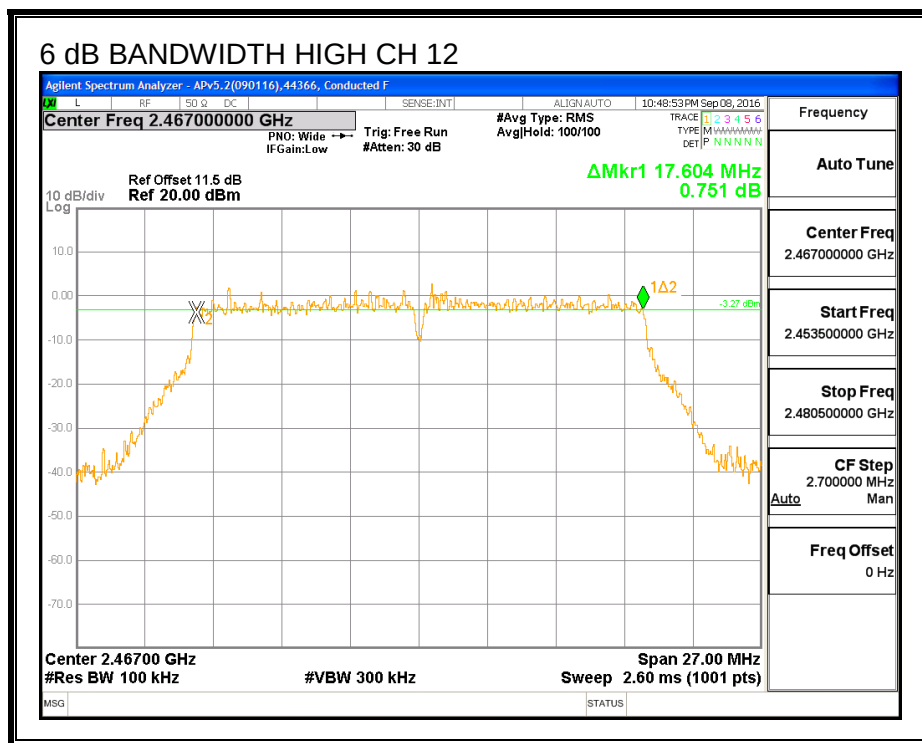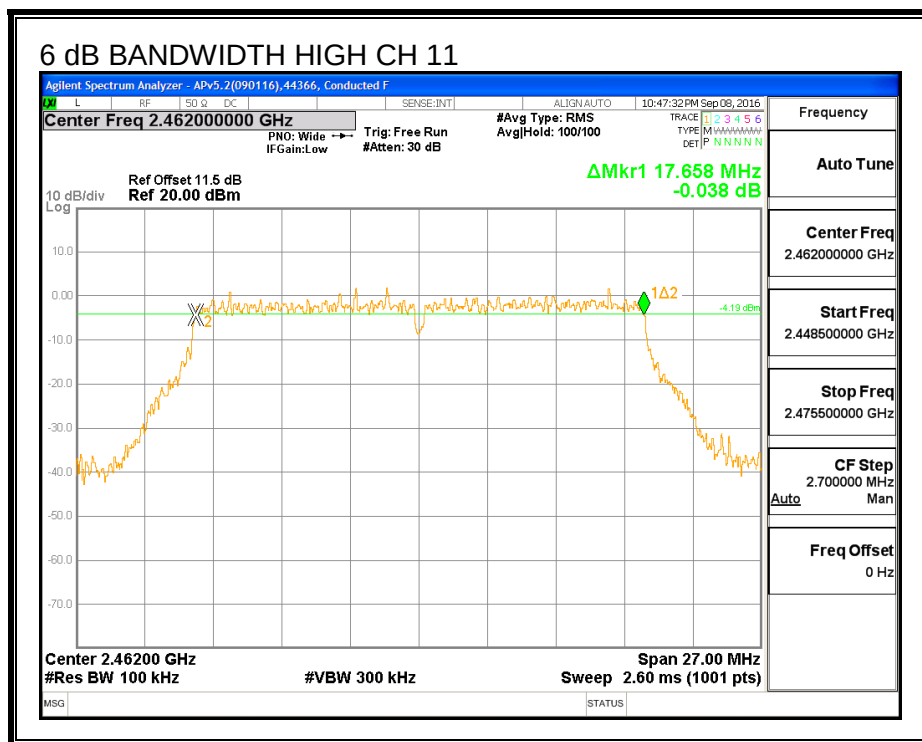

8.23.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 2 (MHz)
Low_1	2412	17.806	17.780
Low_2	2417	17.708	17.835
Mid	2437	17.755	17.857
High_9	2452	17.707	17.766
High_10	2457	17.722	17.991
High_11	2462	17.841	17.892
High_12	2467	17.902	17.766

99% BANDWIDTH, Chain 0

