


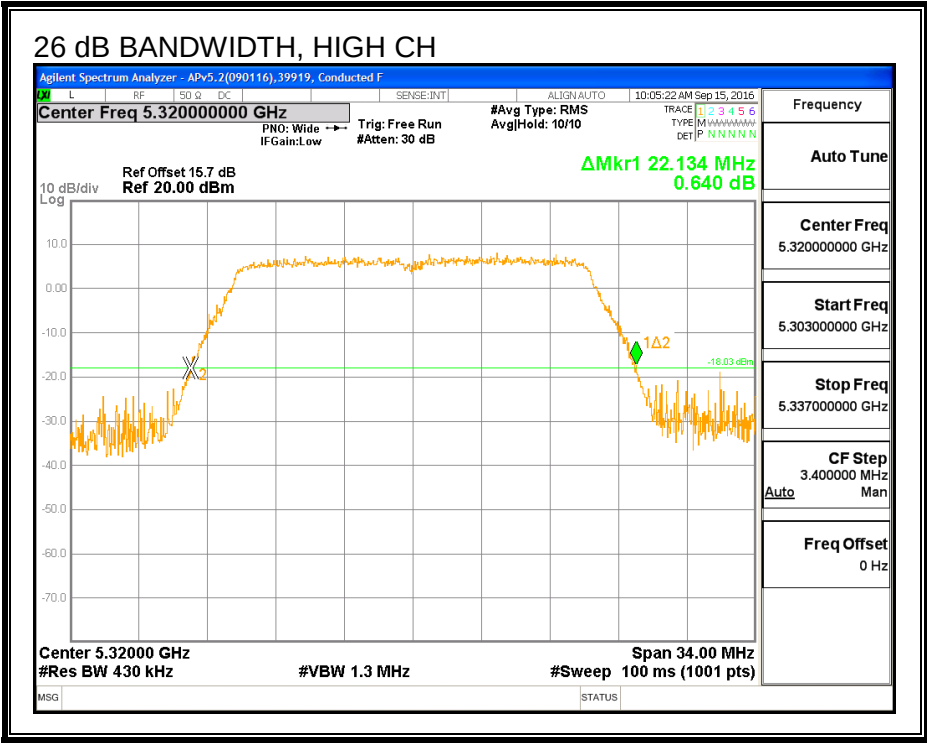


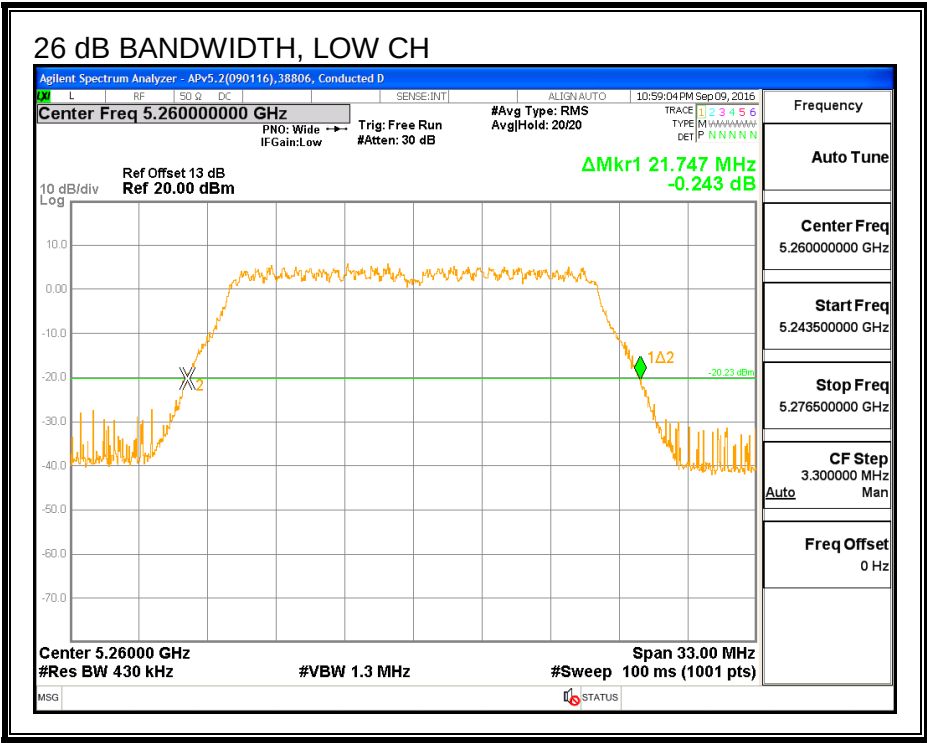

26 DB BANDWIDTH, CHAIN 2

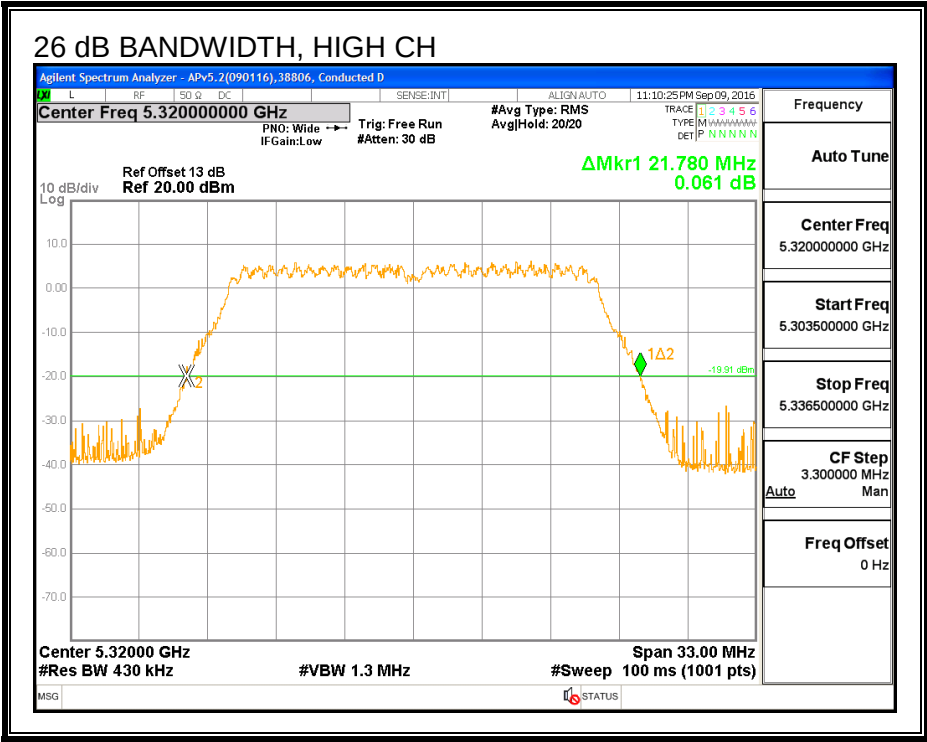

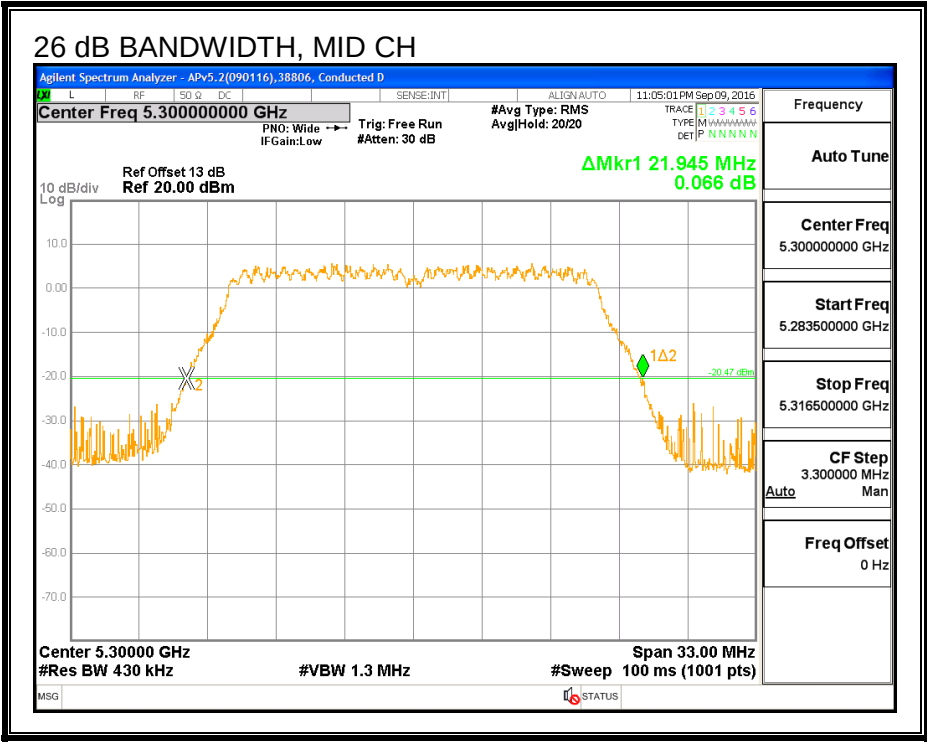

8.12.2. 99% BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS


Channel	Frequency (MHz)	99% BW Chain 1 (MHz)	99% BW Chain 2 (MHz)
Low	5260	17.771	17.716
Mid	5300	17.741	17.856
High	5320	17.860	17.925



99% BANDWIDTH, CHAIN 1

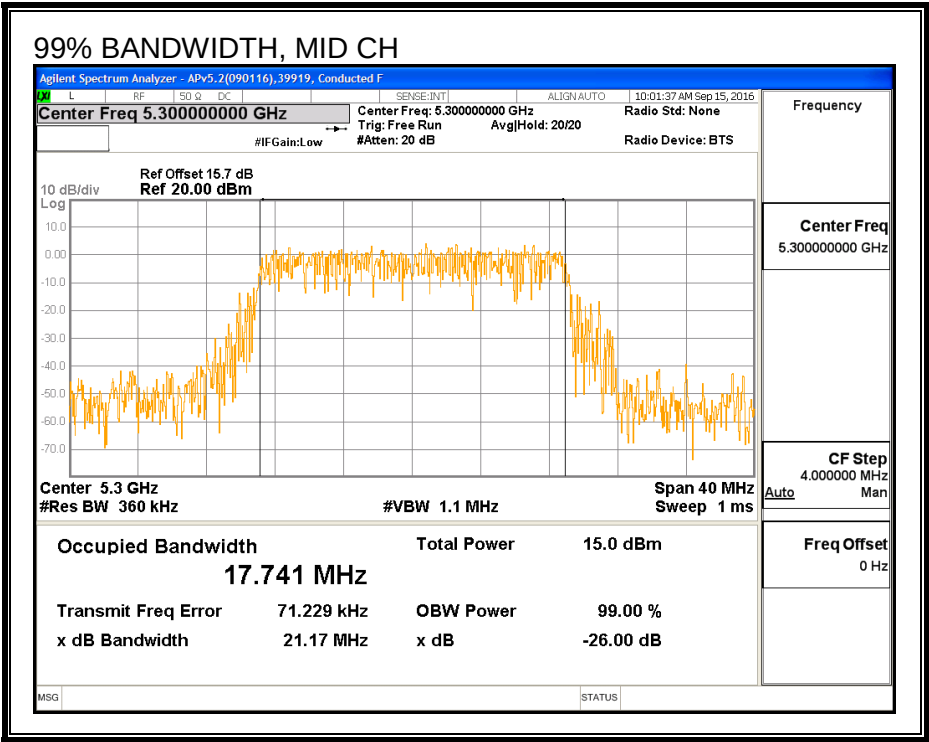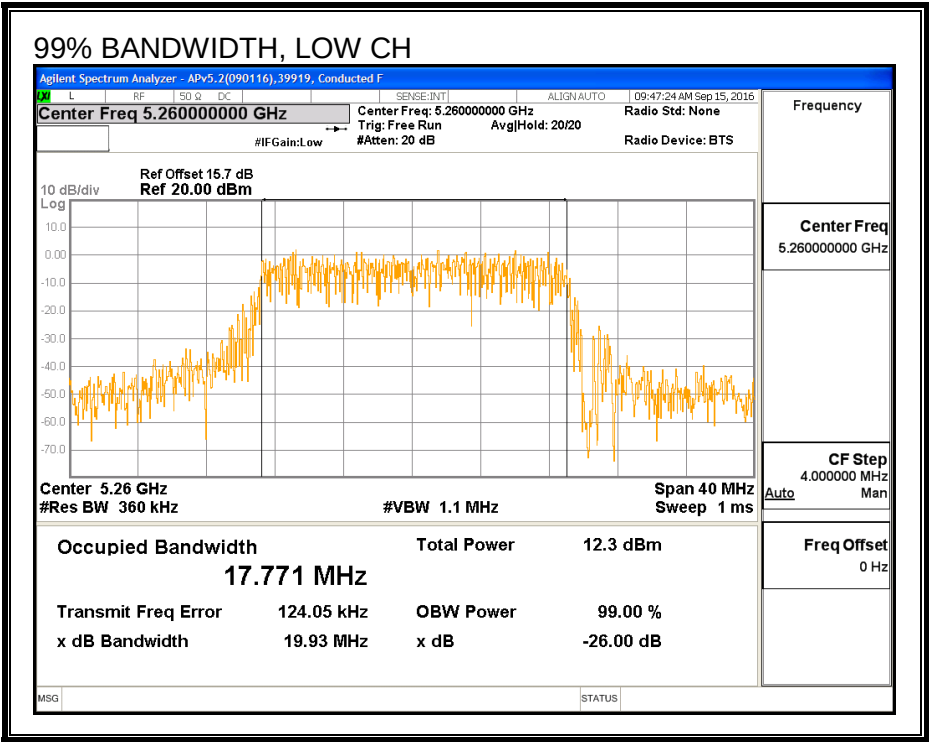

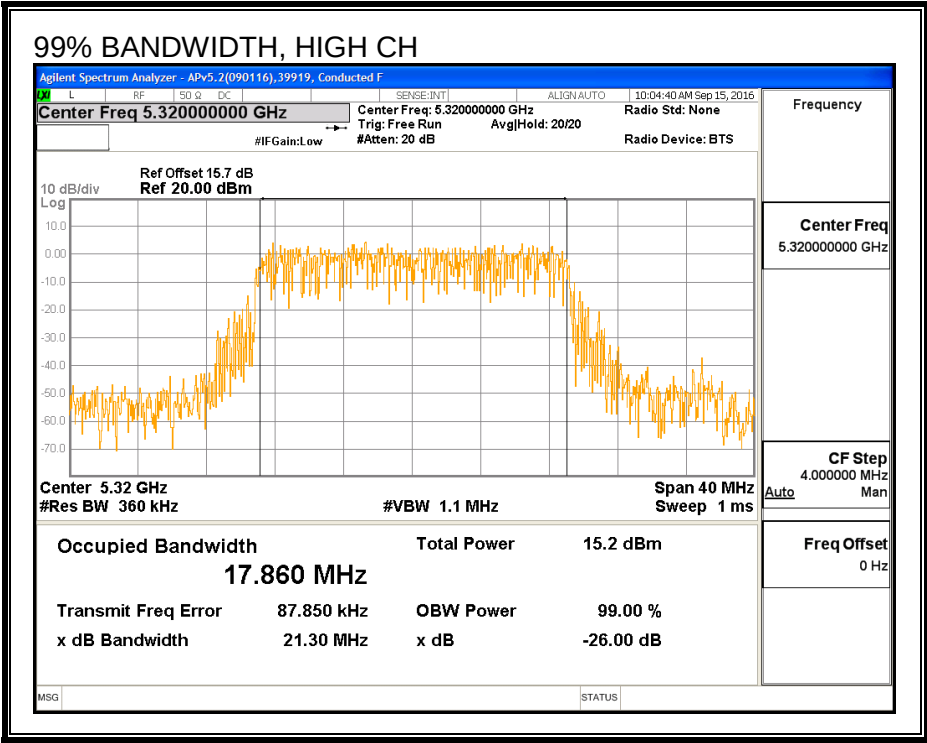

99% BANDWIDTH, CHAIN 2

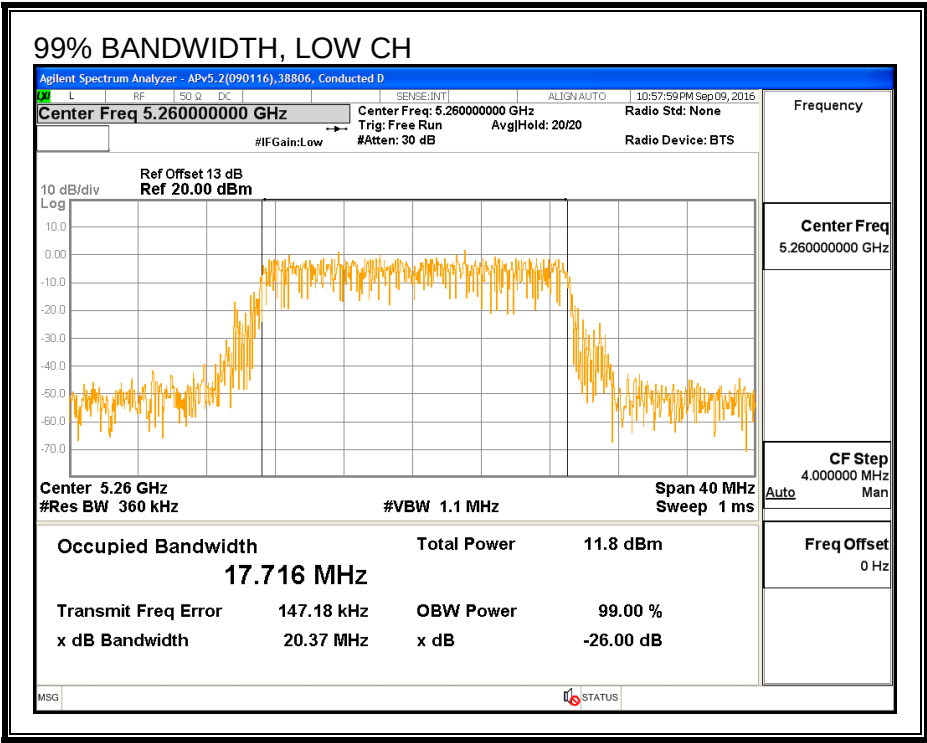

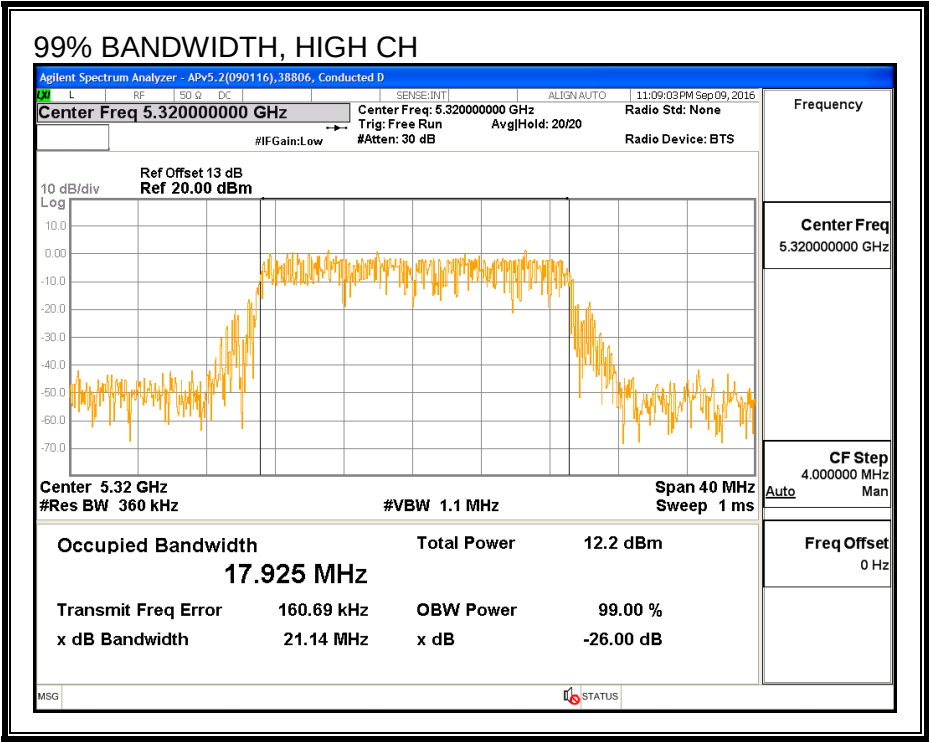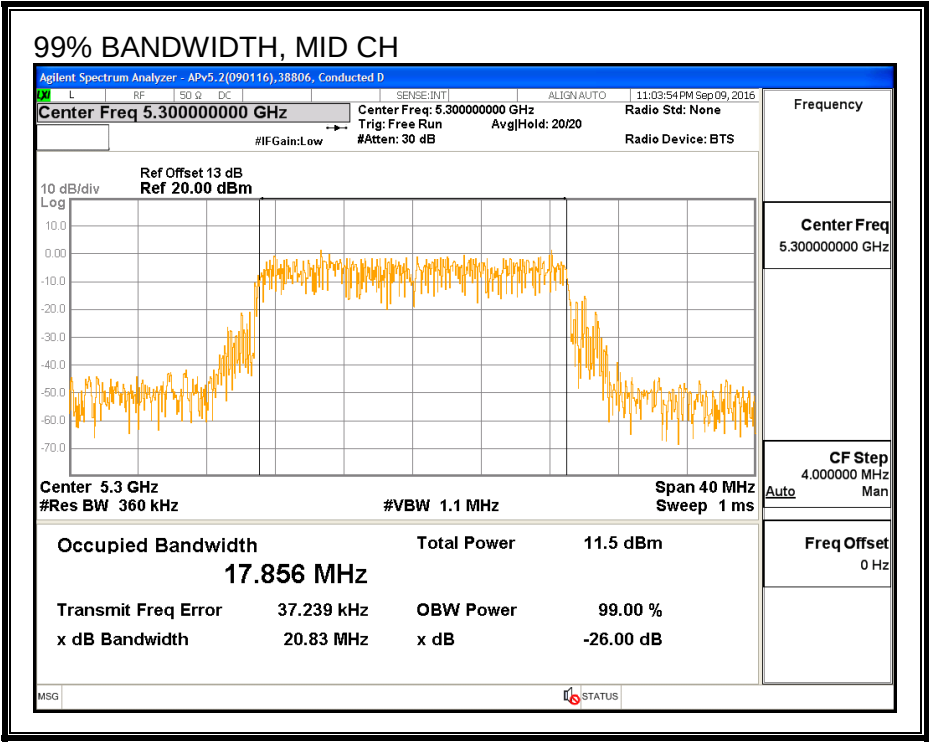

8.12.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	44366	Date:	9/12/16
------------	-------	--------------	---------

Channel	Frequency (MHz)	Chain 1 Power (dBm)	Chain 2 Power (dBm)	Total Power (dBm)
Low	5260	11.97	11.84	14.91
Mid	5300	11.89	11.99	14.95
High	5320	11.81	11.84	14.83

8.12.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26–dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

IC RSS-247 (6.2.2) (1)

The maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10} B$, dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10} B$, dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

Chain 1 Antenna Gain (dBi)	Chain 2 Antenna Gain (dBi)	Correlated Chains Directional Gain (dBi)
7.60	6.00	9.85

RESULTS

ID:	44366	Date:	9/12/16
------------	-------	--------------	---------

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5260	21.75	17.716	9.85	9.85	19.63	7.15
Mid	5300	21.95	17.741	9.85	9.85	19.64	7.15
High	5320	21.78	17.86	9.85	9.85	19.67	7.15

Duty Cycle CF (dB)	1.05	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results


Channel	Frequency (MHz)	Chain 1 Meas Power (dBm)	Chain 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	11.97	11.84	14.91	19.63	-4.72
Mid	5300	11.89	11.99	14.95	19.64	-4.69
High	5320	11.81	11.84	14.83	19.67	-4.83

PSD Results


Channel	Frequency (MHz)	Chain 1 Meas PSD (dBm)	Chain 2 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5260	-0.19	-0.13	3.90	7.15	-3.25
Mid	5300	-0.04	0.04	4.06	7.15	-3.09
High	5320	-0.14	-0.08	3.95	7.15	-3.20



PSD, CHAIN 1

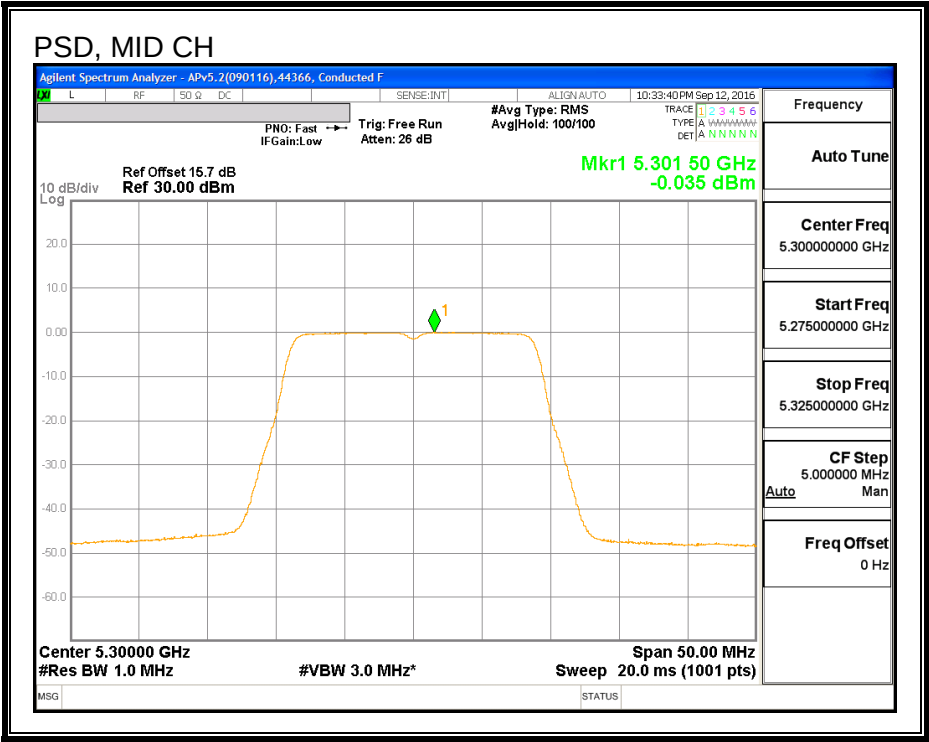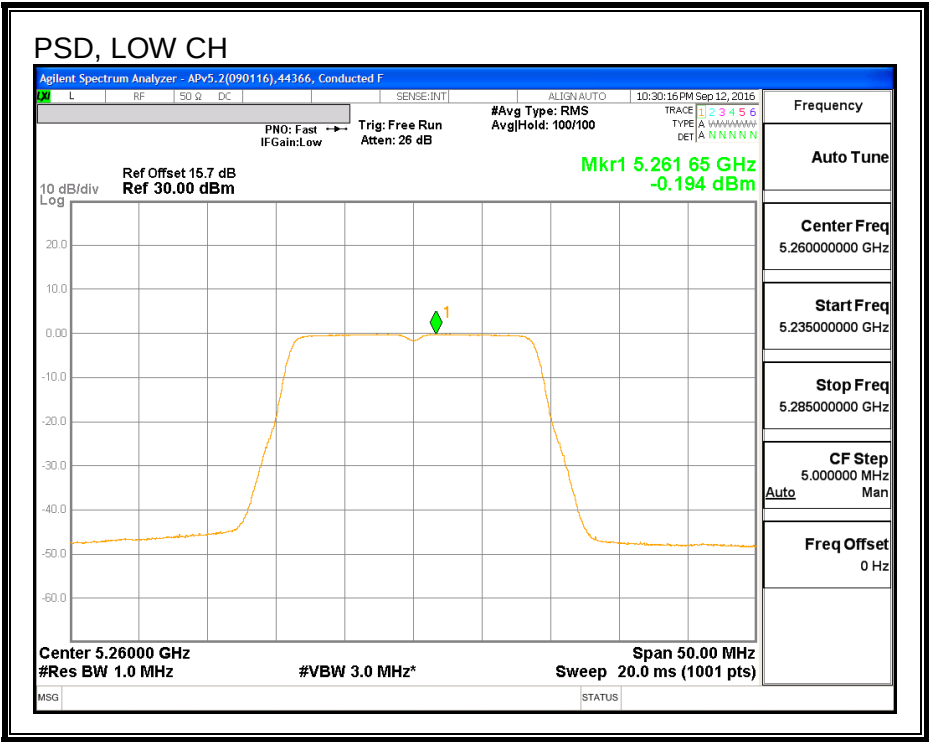

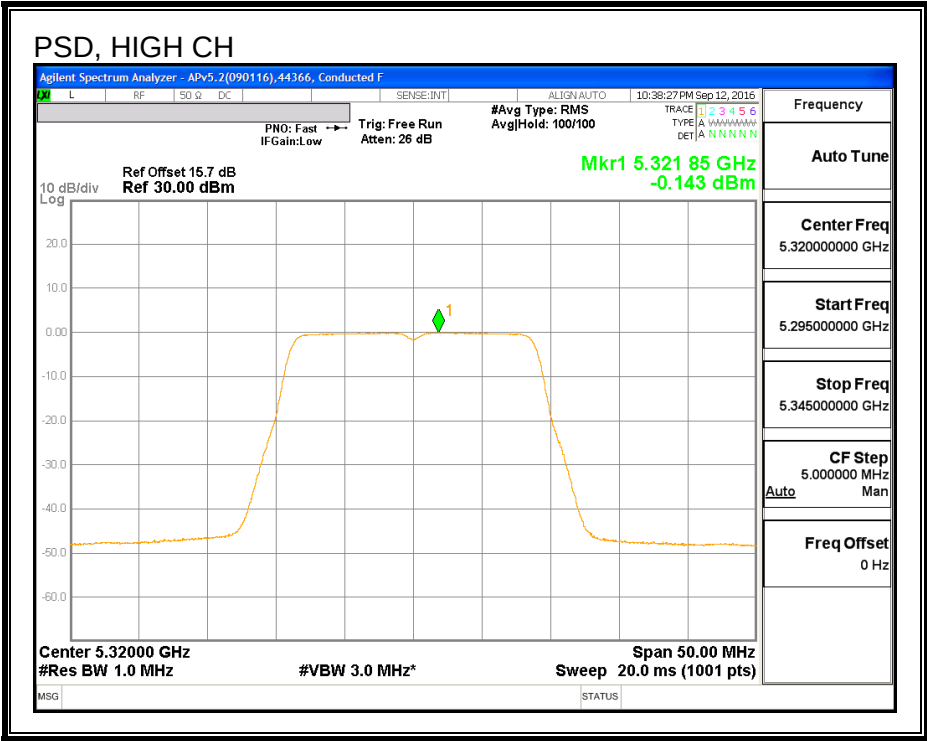

PSD, CHAIN 2

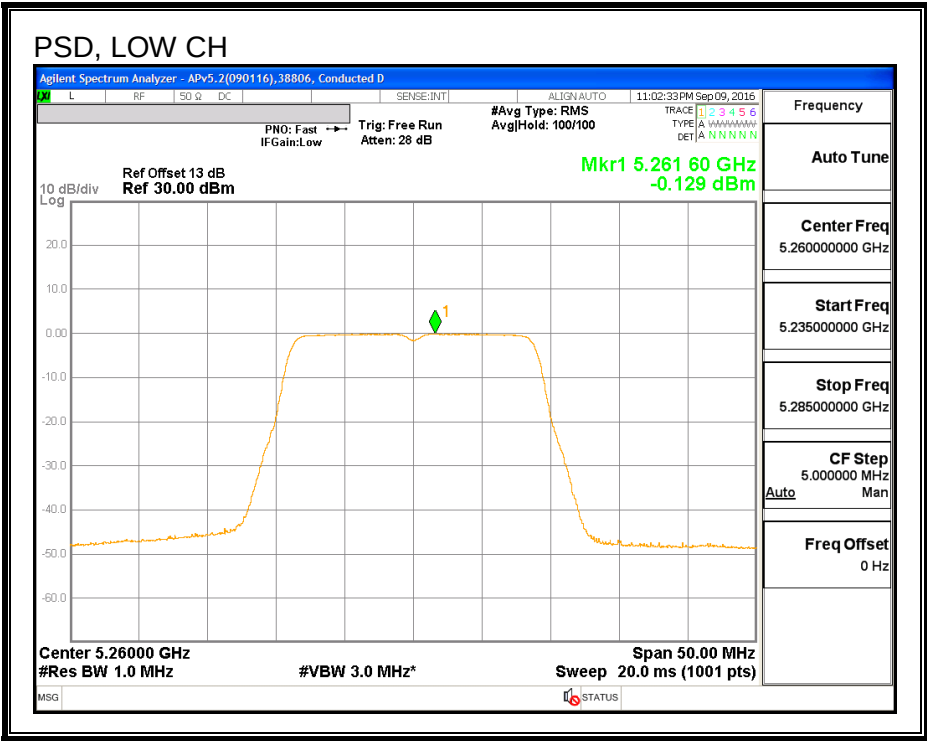

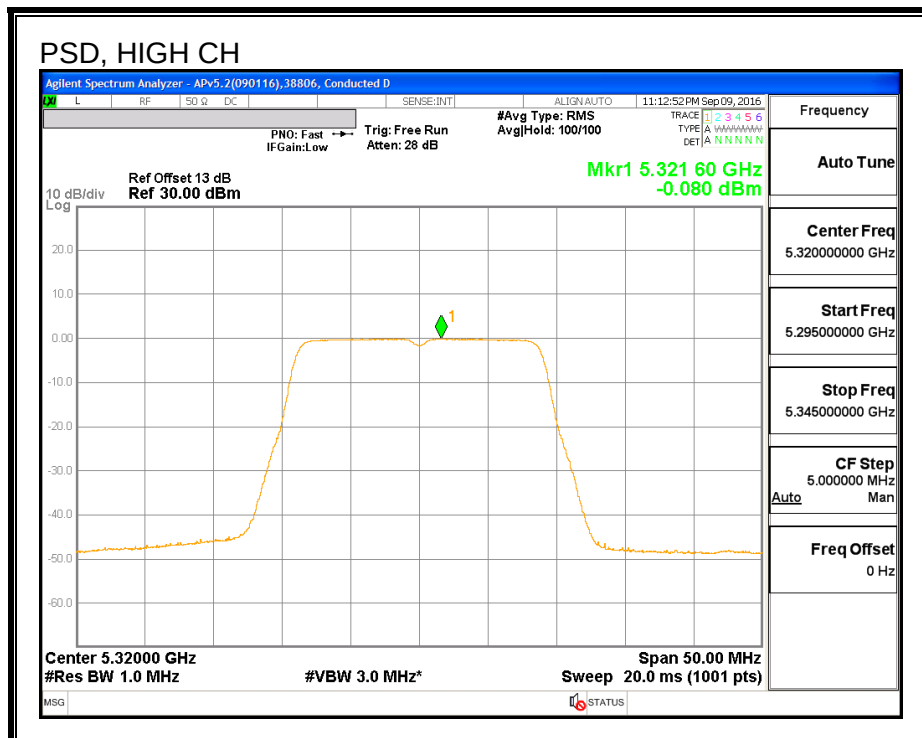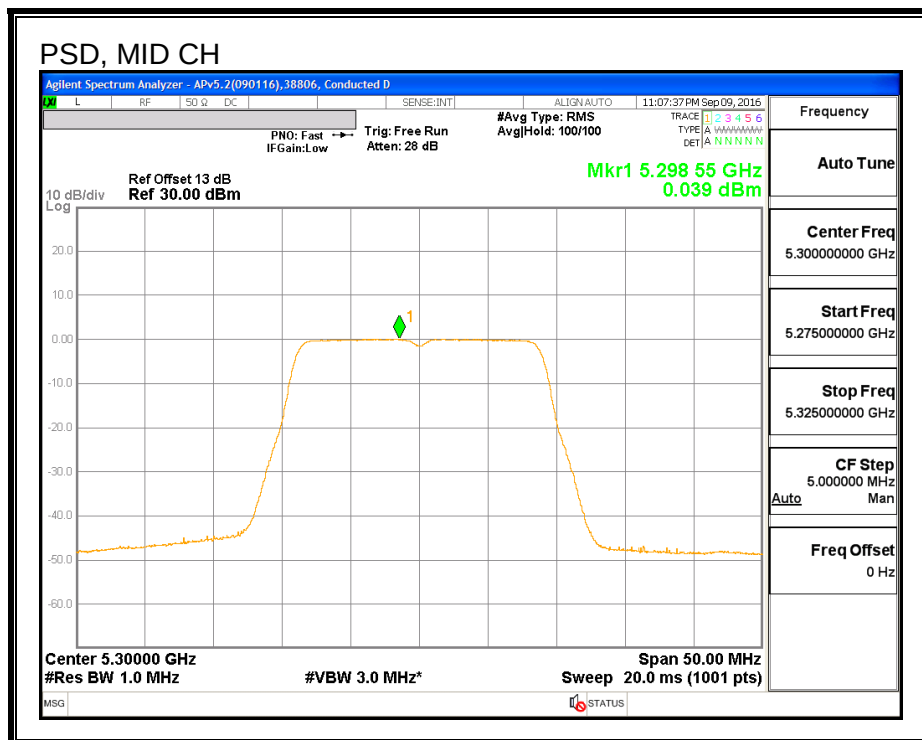

8.13. 802.11n HT20 3Tx CDD MODE IN THE 5.3 GHz BAND

8.13.1. 26 dB BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS


Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)	26 dB BW Chain 2 (MHz)
Low	5260	22.508	21.875	22.032
Mid	5300	22.500	22.304	22.780
High	5320	22.134	22.925	22.542



26 DB BANDWIDTH, CHAIN 0

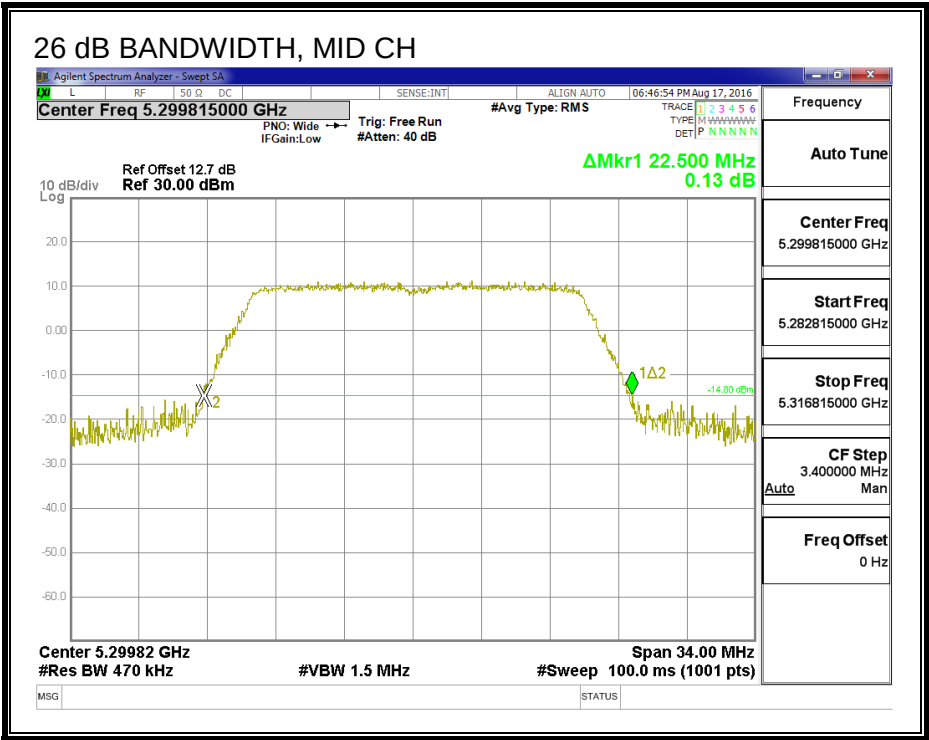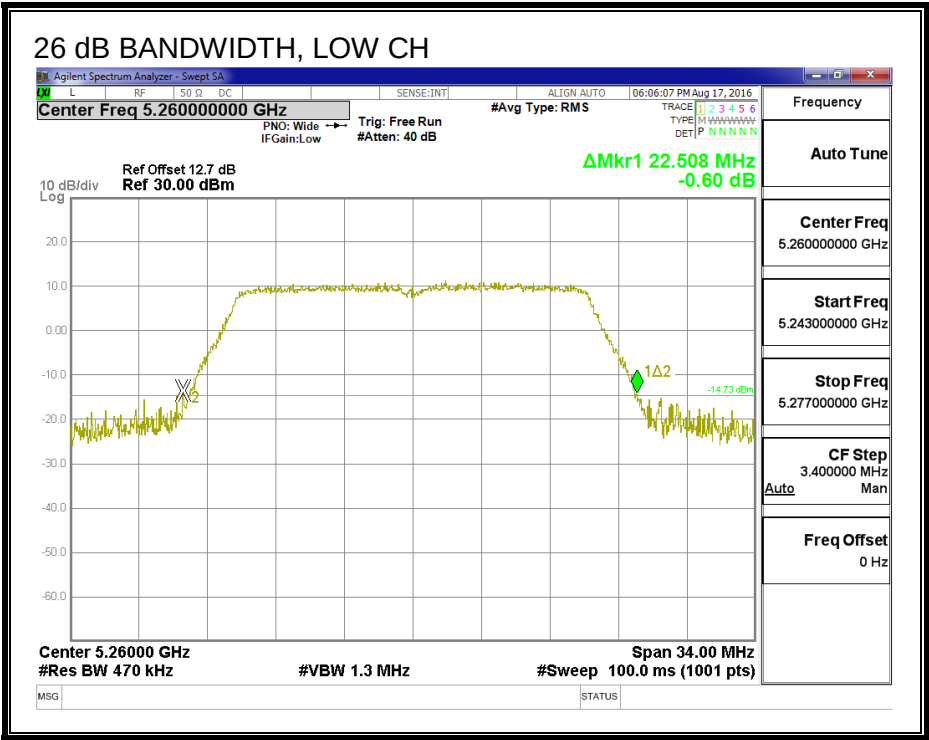


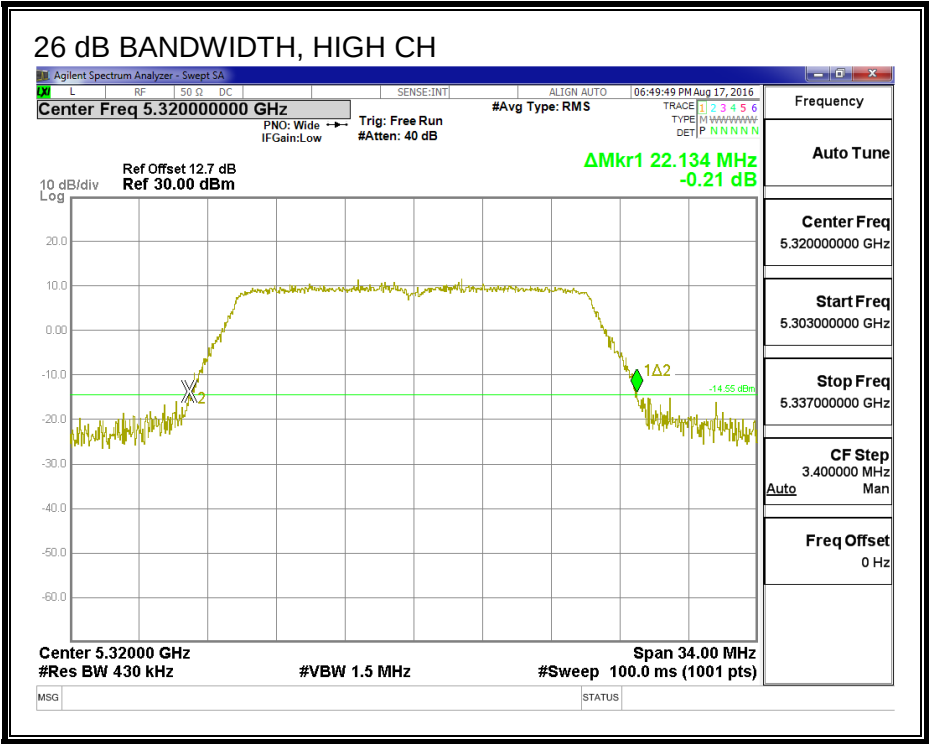



26 DB BANDWIDTH, CHAIN 1

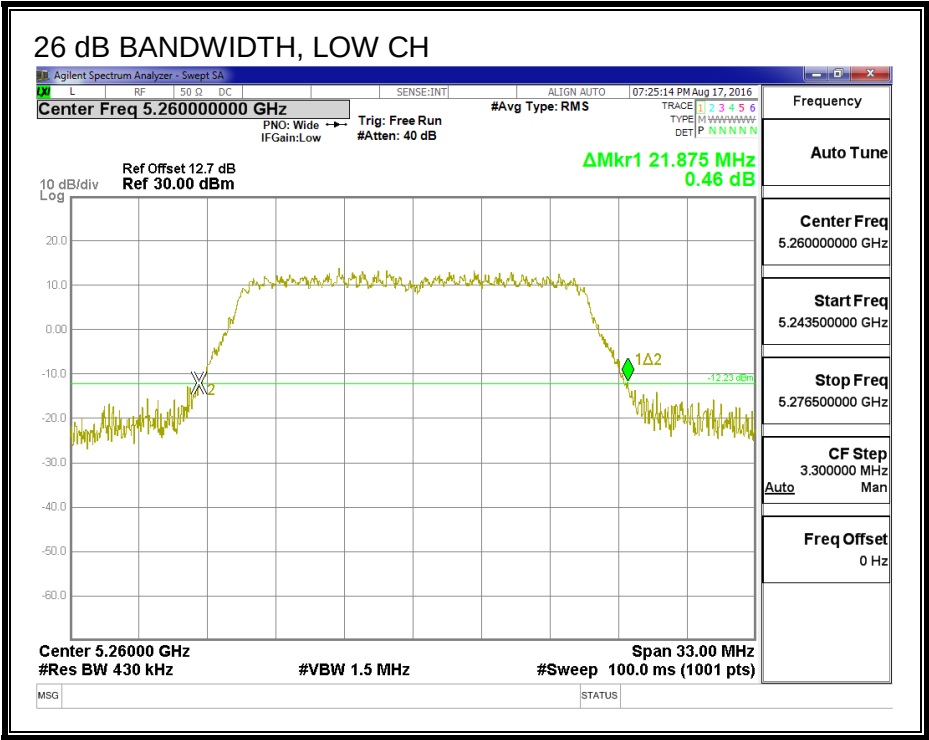

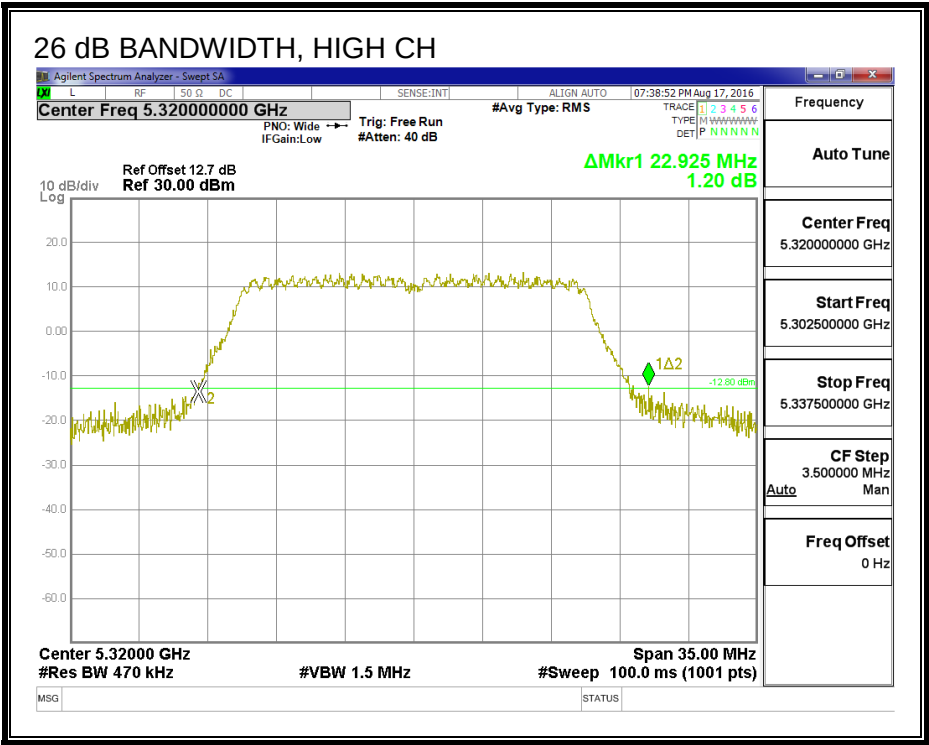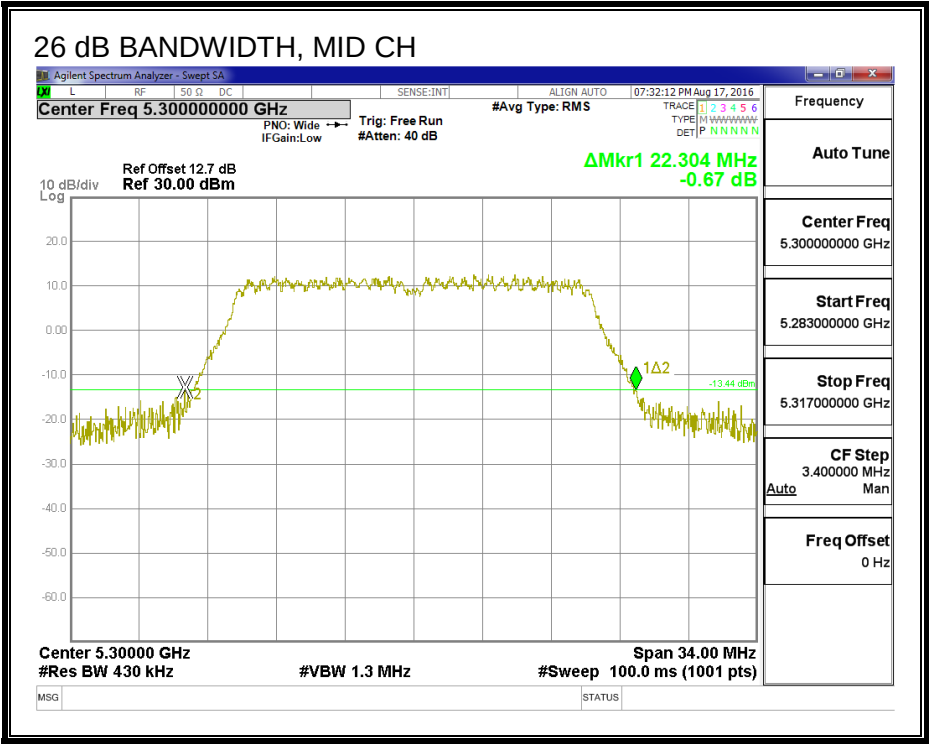

26 DB BANDWIDTH, CHAIN 2

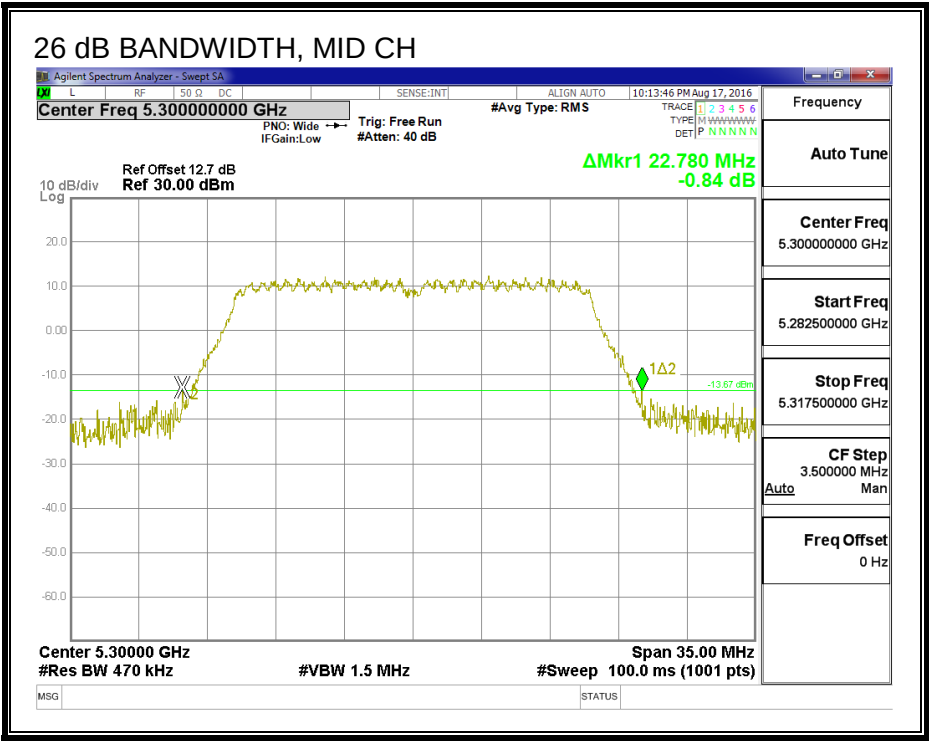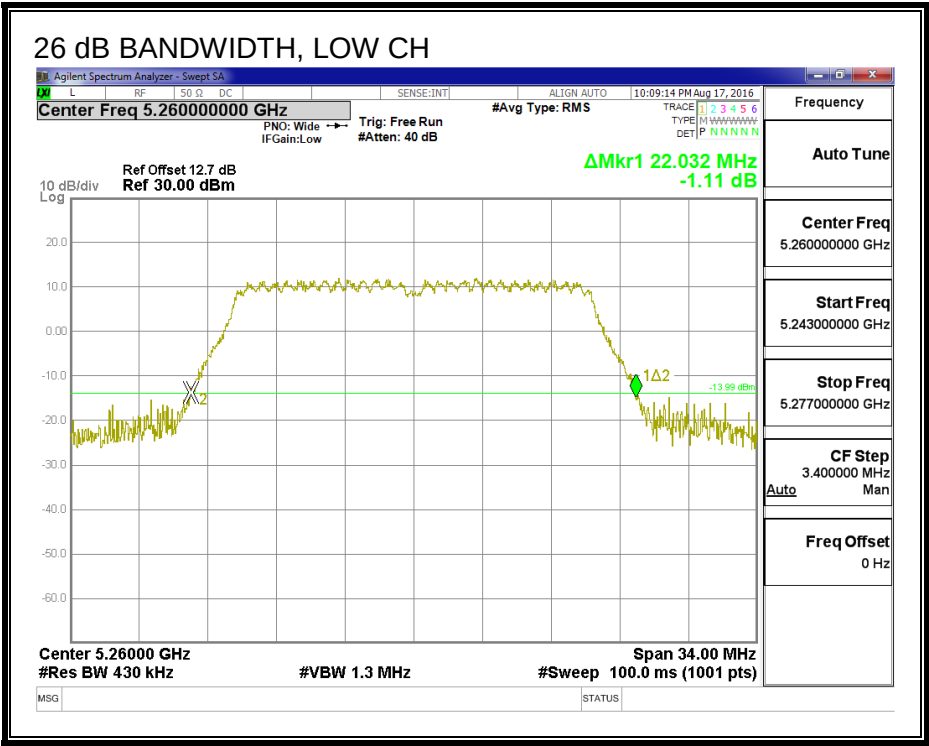

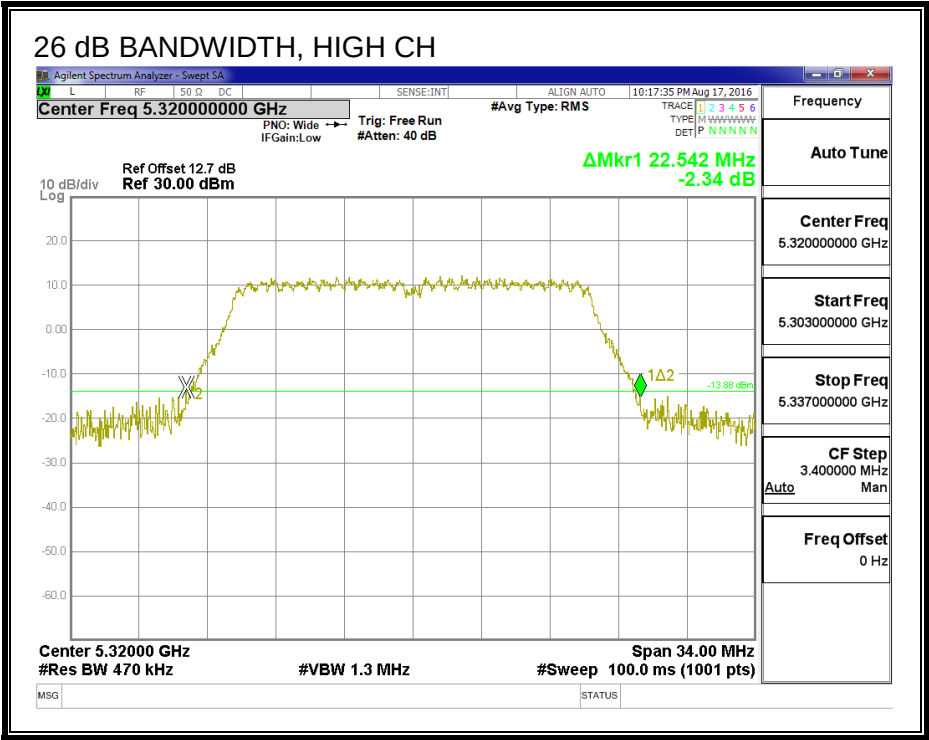

8.13.2. 99% BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS


Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)	99% BW Chain 2 (MHz)
Low	5260	17.908	17.841	17.792
Mid	5300	17.123	17.819	17.787
High	5320	17.132	17.713	17.145



99% BANDWIDTH, CHAIN 0

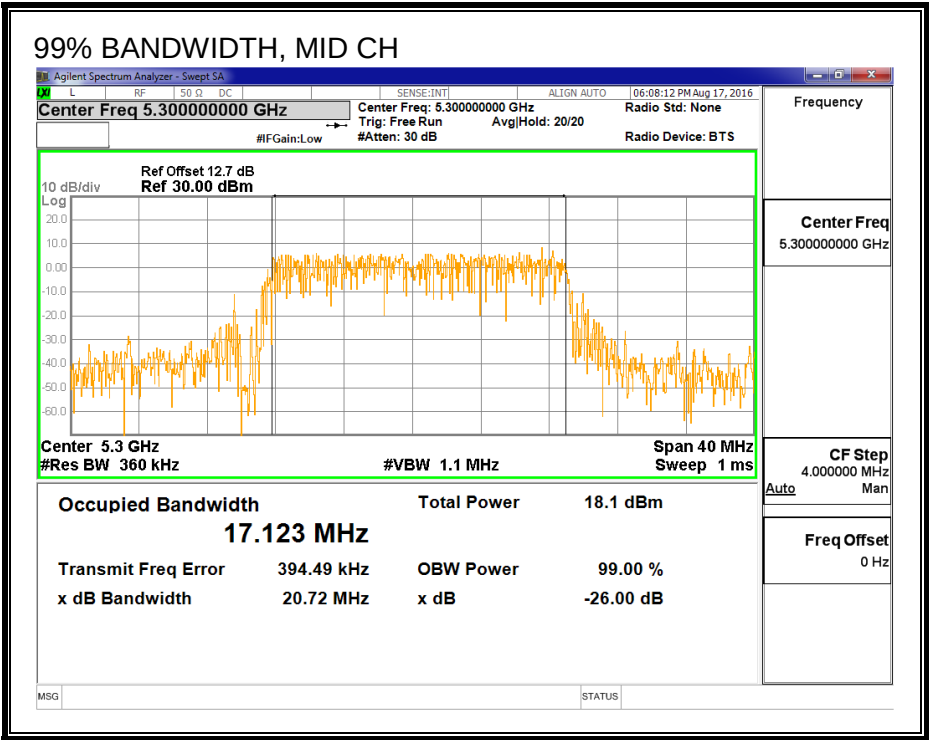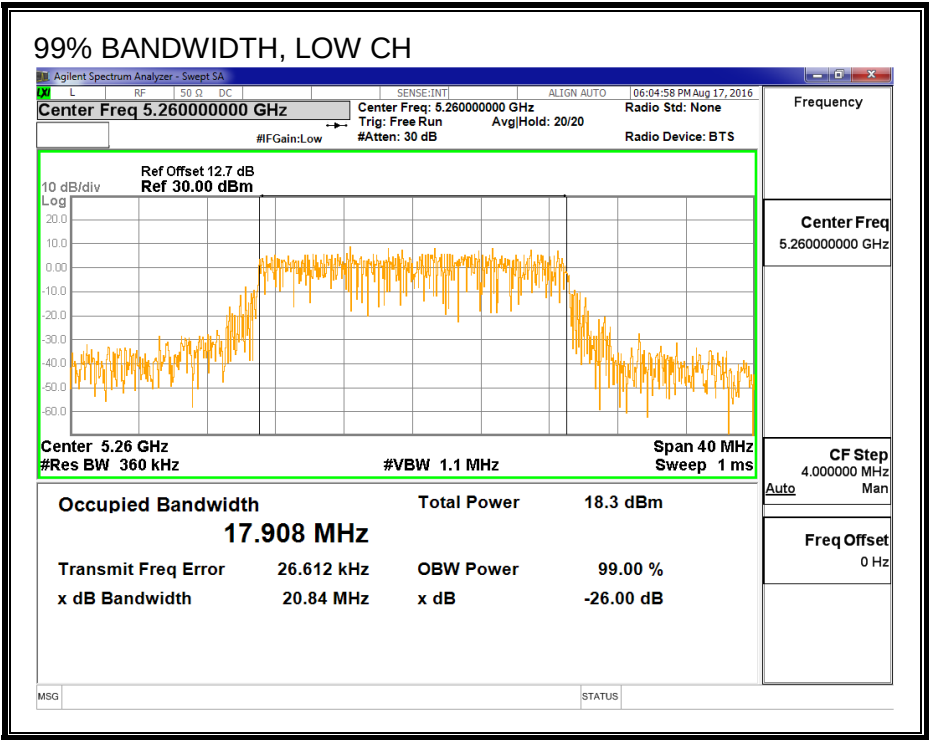


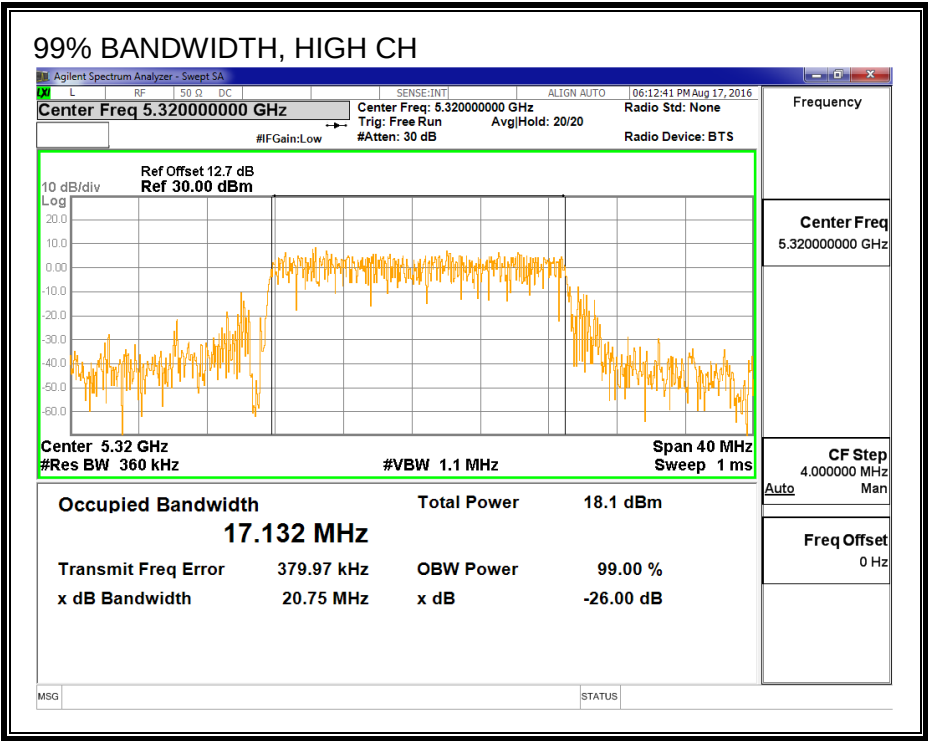



99% BANDWIDTH, CHAIN 1

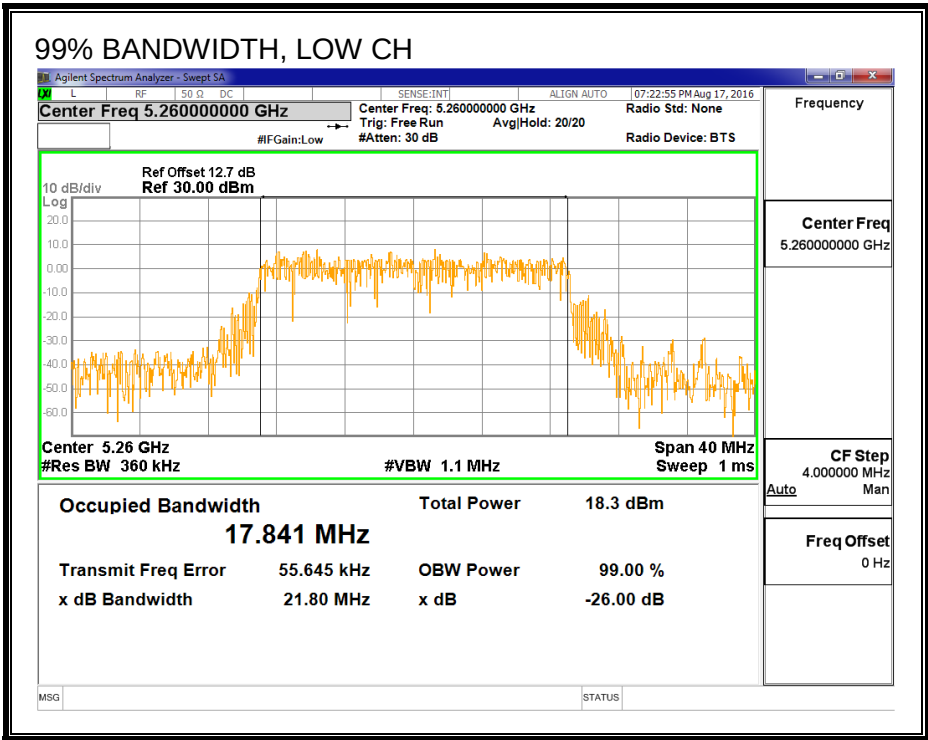

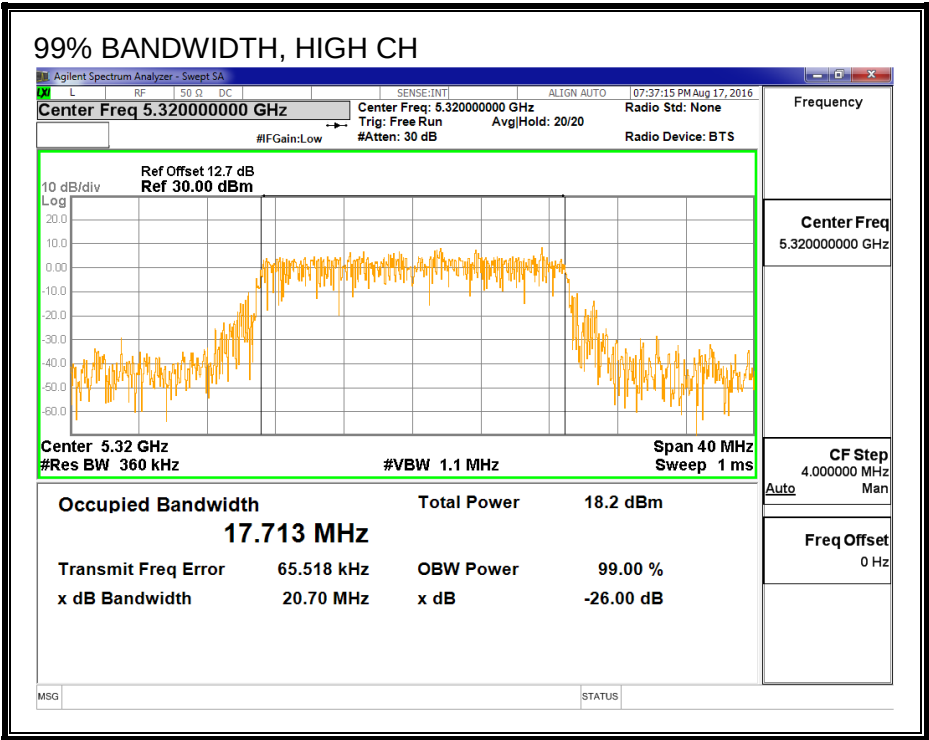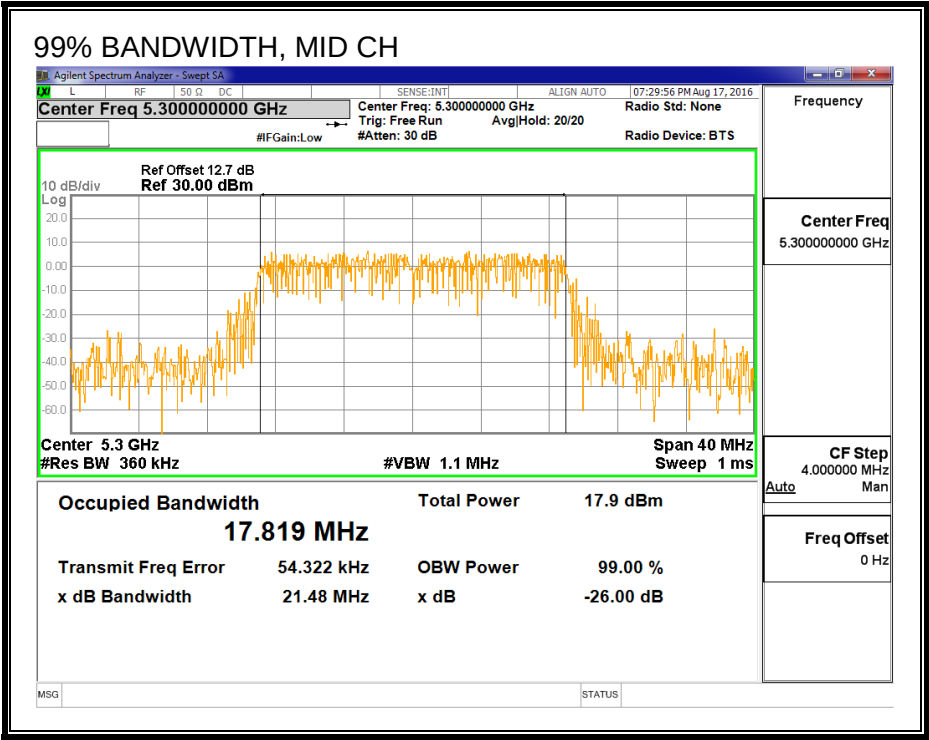

99% BANDWIDTH, CHAIN 2

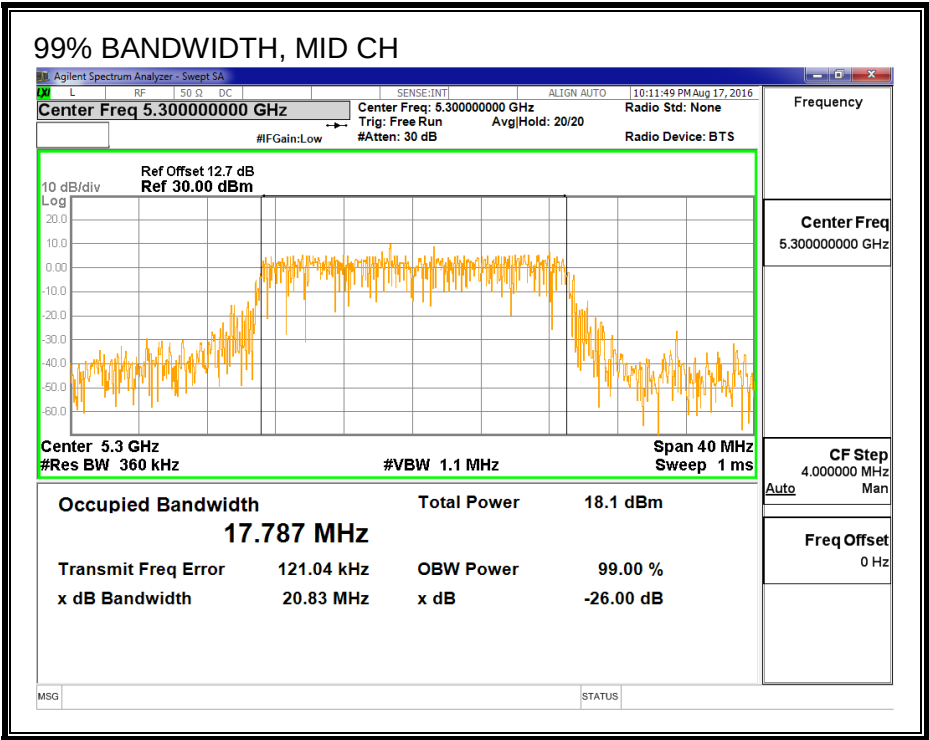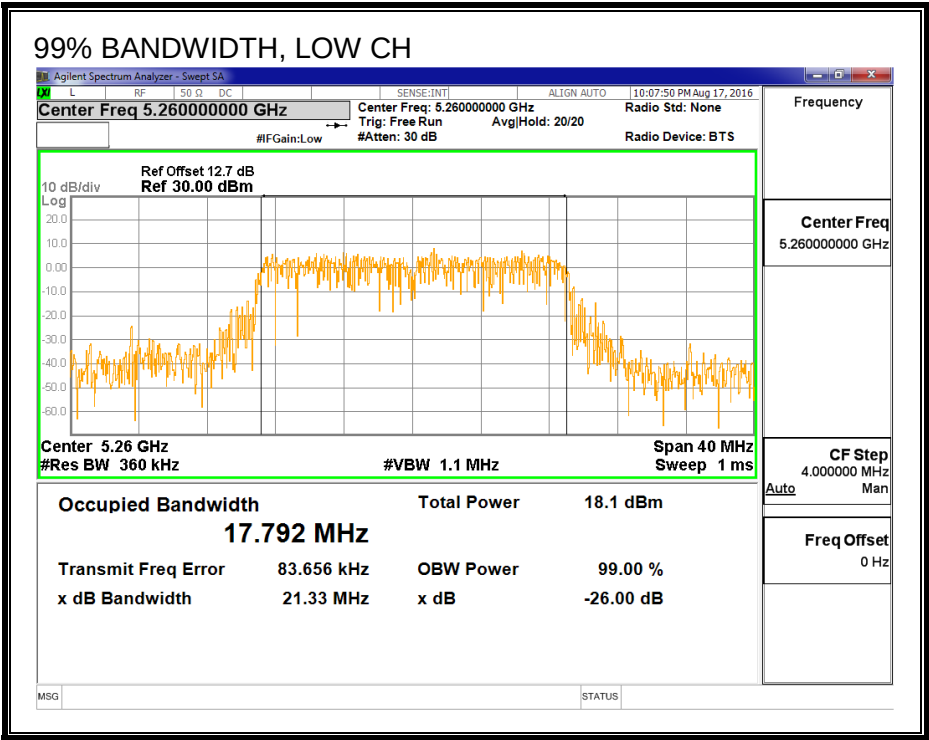

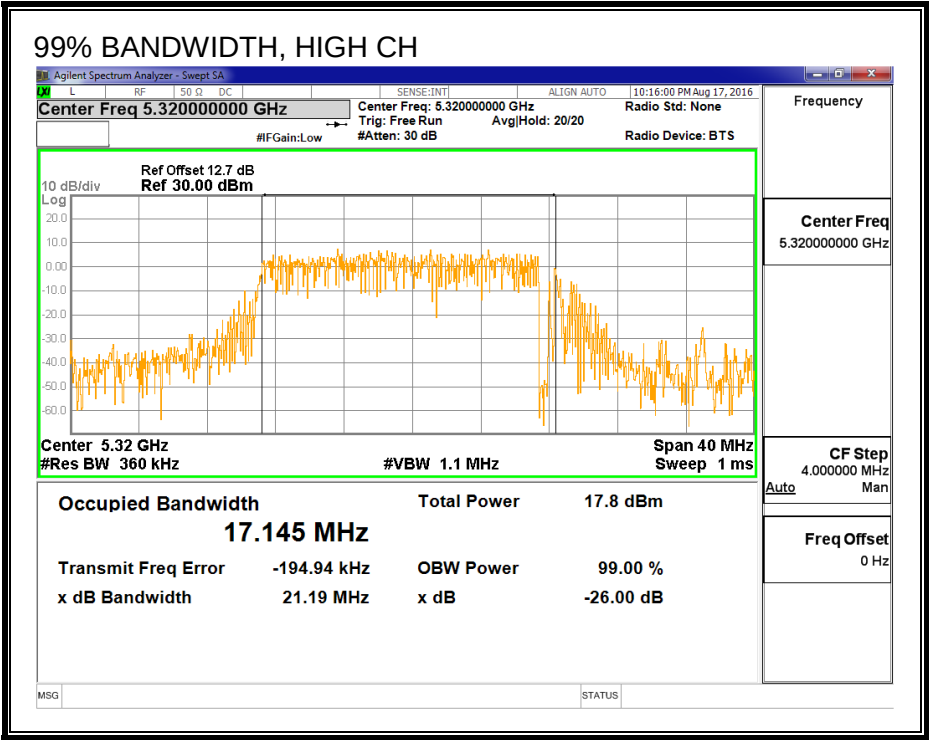

8.13.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	30606	Date:	9/1/16
------------	-------	--------------	--------

Average Power Results

Channel	Frequency (MHz)	Chain 0 Power (dBm)	Chain 1 Power (dBm)	Chain 2 Power (dBm)	Total Power (dBm)
Low	5260	8.87	8.89	8.93	13.67
Mid	5300	9.00	8.99	8.98	13.76
High	5320	8.84	8.92	8.92	13.66

8.13.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26–dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

IC RSS-247 (6.2.2) (1)

The maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10} B$, dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10} B$, dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Chain 2 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
4.90	7.60	6.00	6.31

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Chain 2 Antenna Gain (dBi)	Correlated Chains Directional Gain (dBi)
4.90	7.60	6.00	11.01

RESULTS

ID:	30606	Date:	9/1/16
------------	-------	--------------	--------

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5260	21.88	17.792	6.31	11.01	23.19	5.99
Mid	5300	22.30	17.123	6.31	11.01	23.03	5.99
High	5320	22.13	17.132	6.31	11.01	23.03	5.99

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results


Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Chain 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	8.87	8.89	8.93	13.67	23.19	-9.52
Mid	5300	9.00	8.99	8.98	13.76	23.03	-9.26
High	5320	8.84	8.92	8.92	13.66	23.03	-9.36

PSD Results


Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Chain 2 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5260	-3.33	-3.24	-3.04	1.57	5.99	-4.42
Mid	5300	-2.95	-3.03	-2.75	1.86	5.99	-4.13
High	5320	-3.08	-3.40	-3.18	1.55	5.99	-4.44



PSD, CHAIN 0

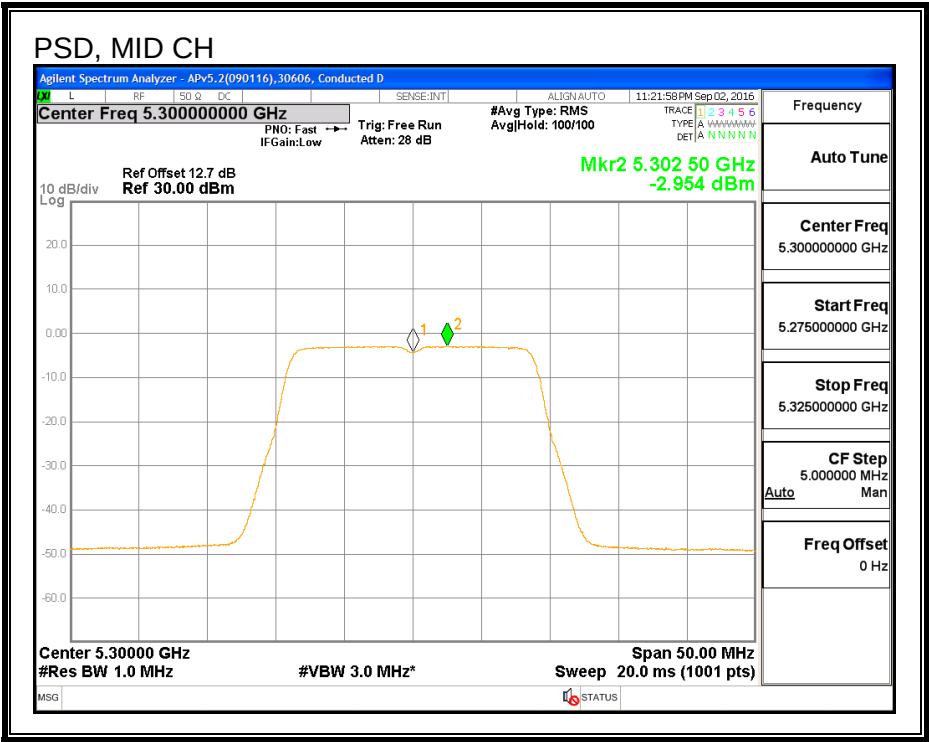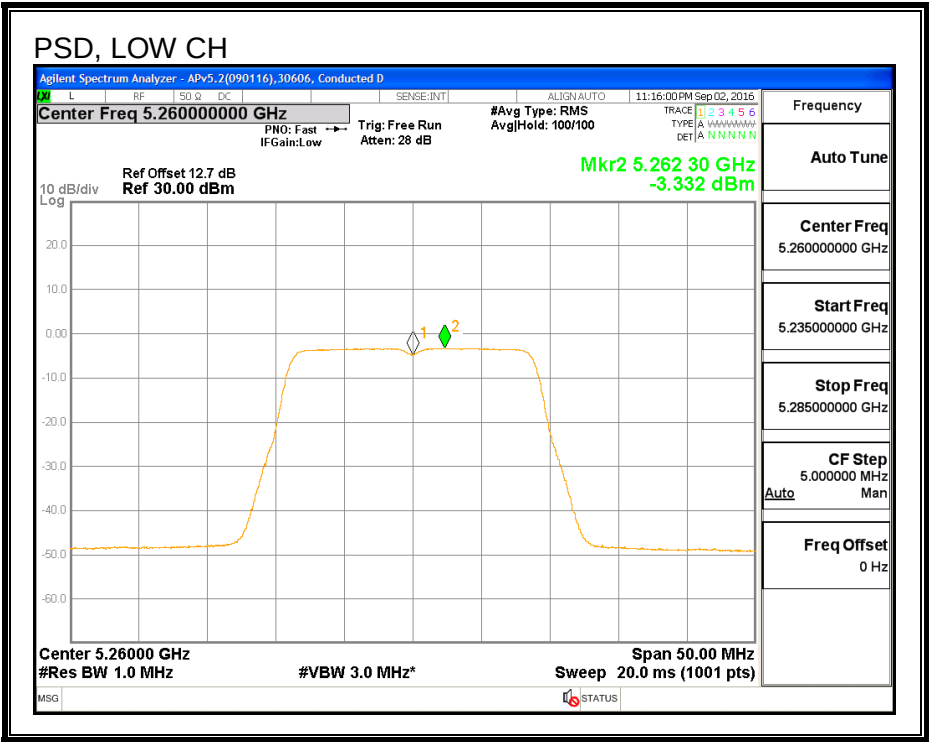


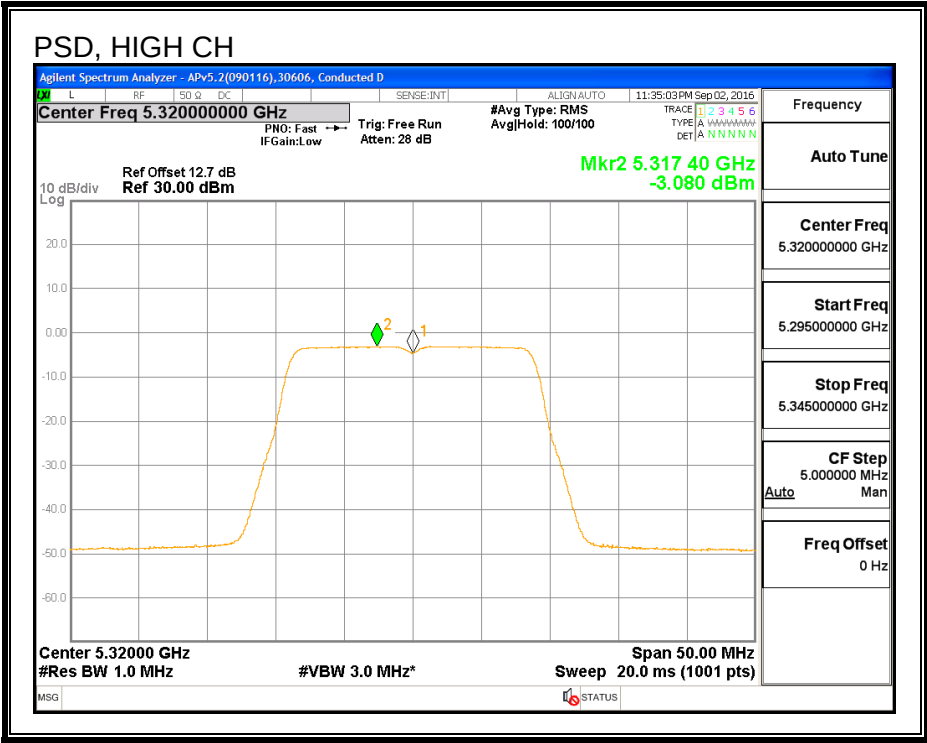



PSD, CHAIN 1

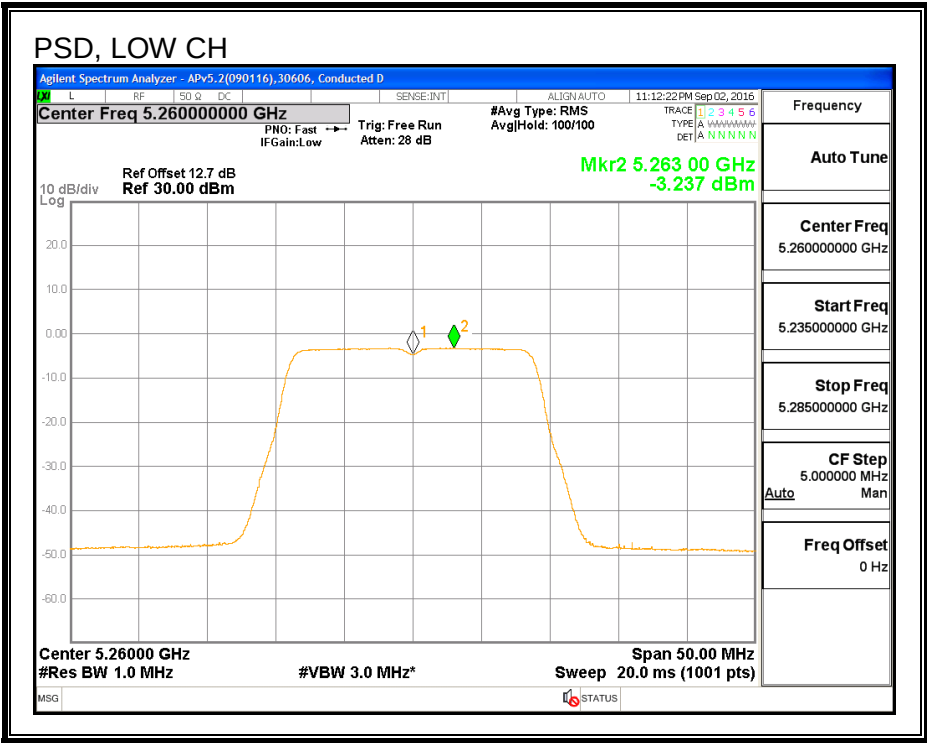

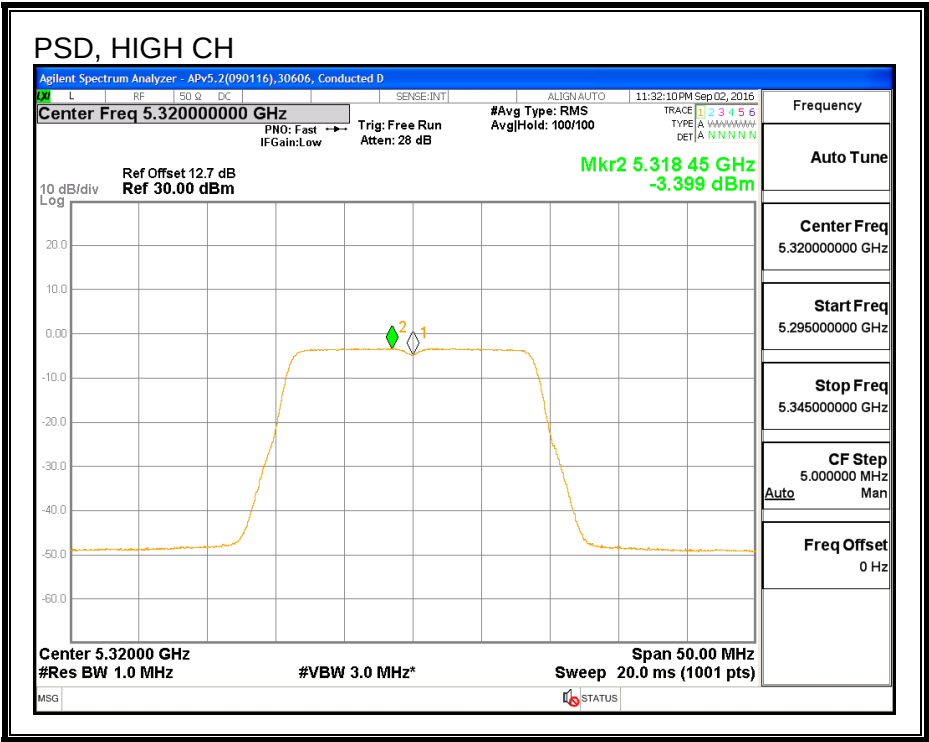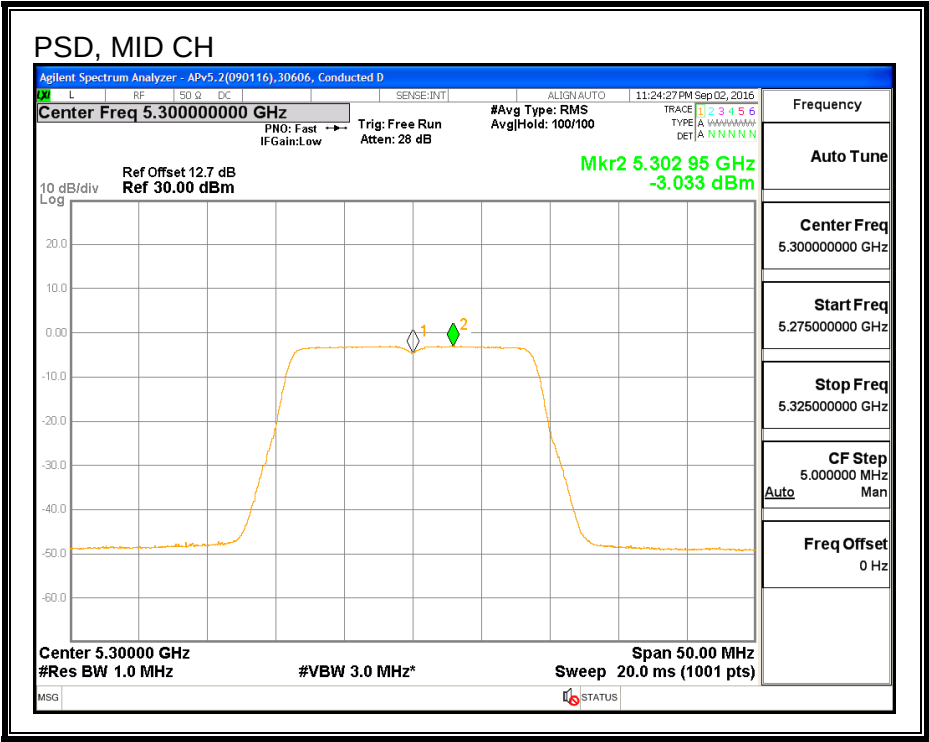

PSD, CHAIN 2

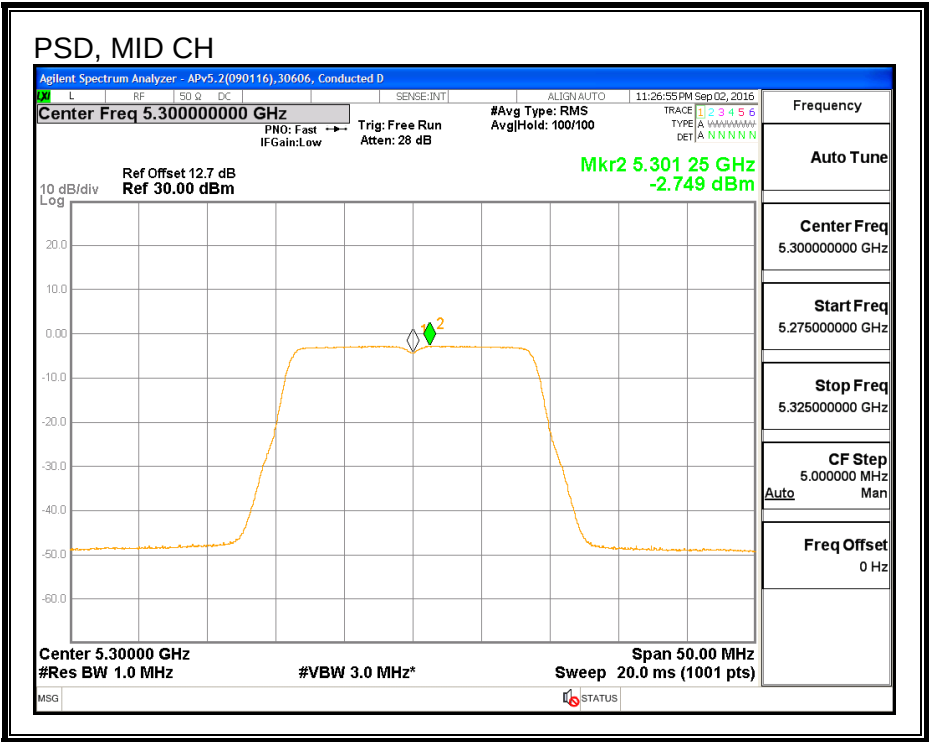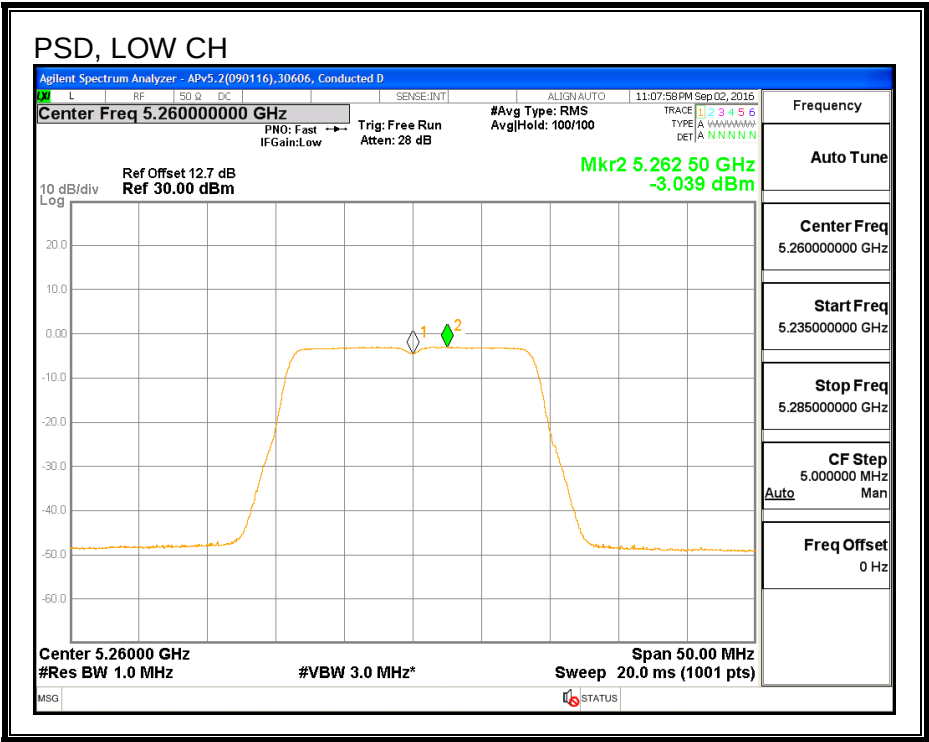

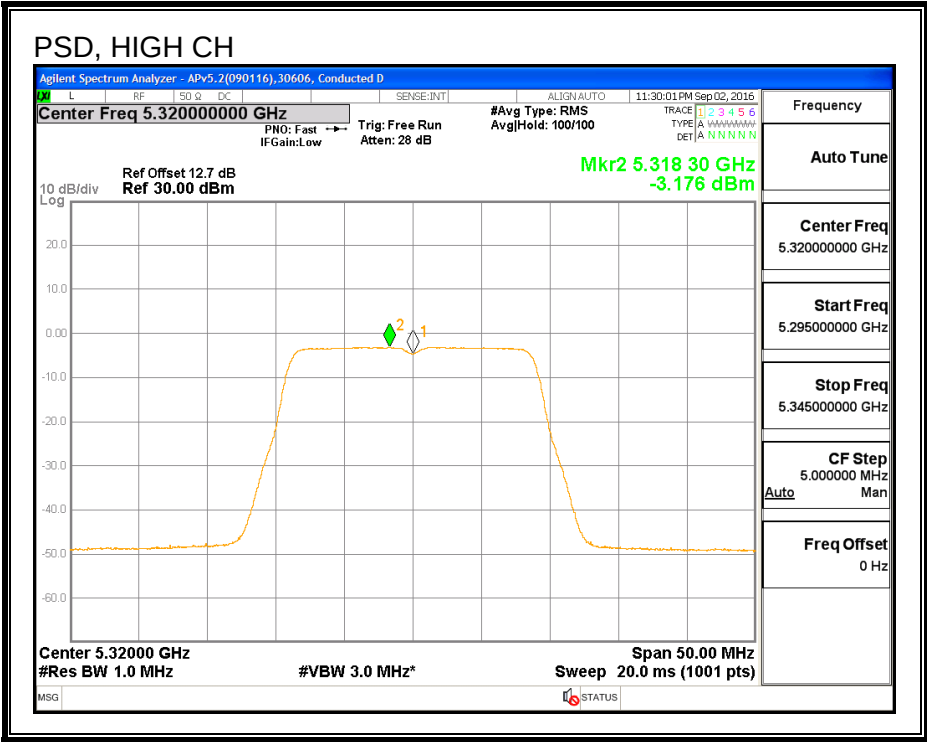

8.14. 802.11n HT20 3Tx STBC MODE IN THE 5.3 GHz BAND

8.14.1. 26 dB BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS


Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)	26 dB BW Chain 2 (MHz)
Low	5260	22.134	21.813	21.978
Mid	5300	22.236	21.912	21.879
High	5320	22.134	21.879	21.945



26 DB BANDWIDTH, CHAIN 0

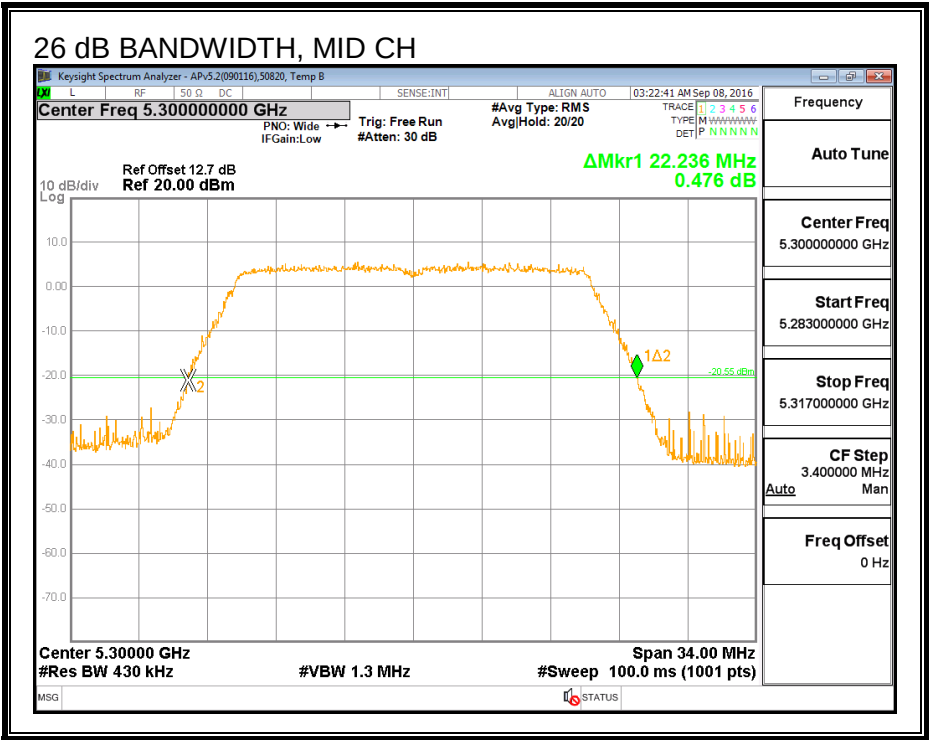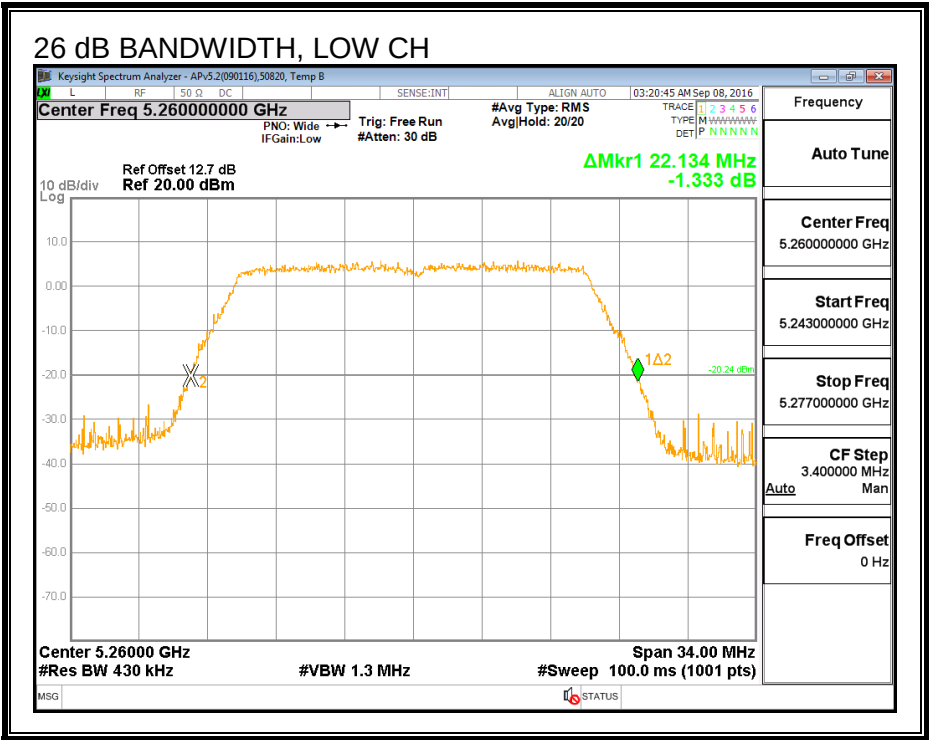


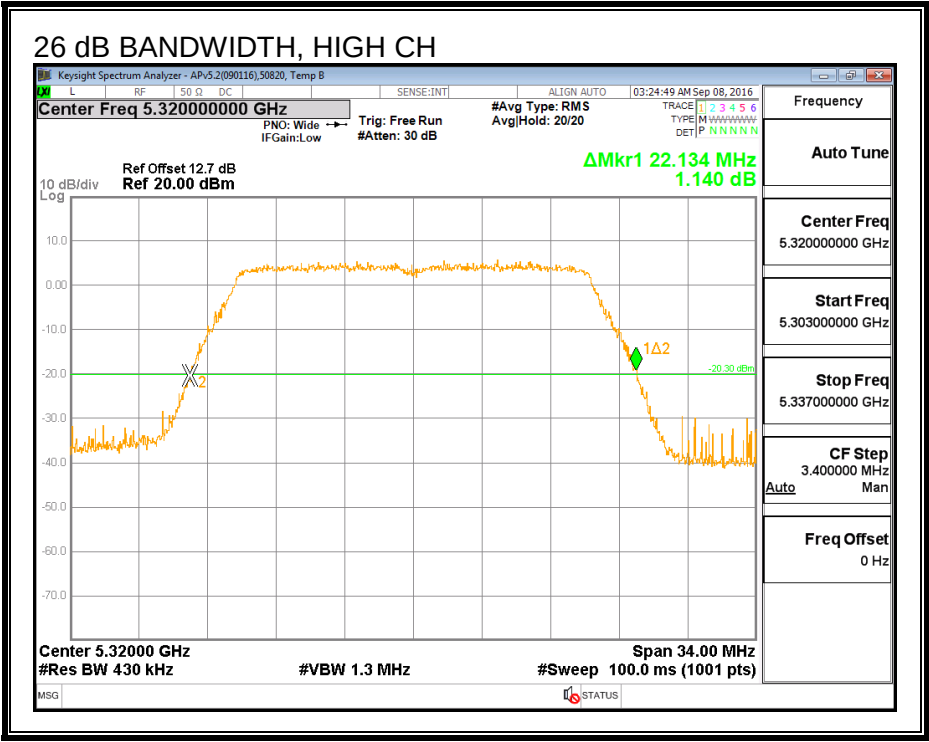



26 DB BANDWIDTH, CHAIN 1

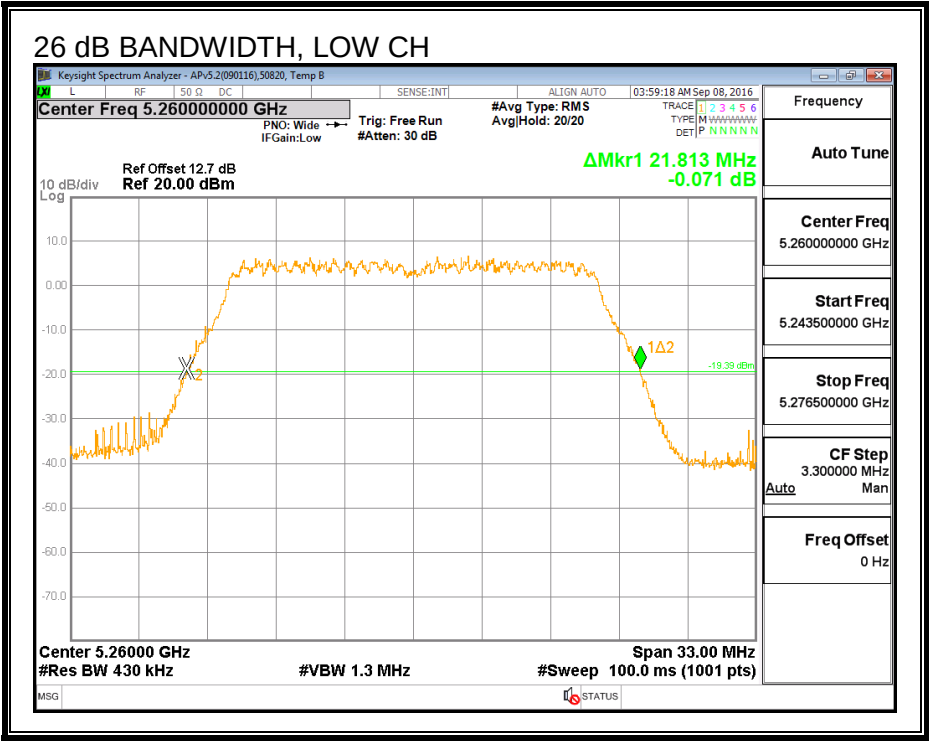

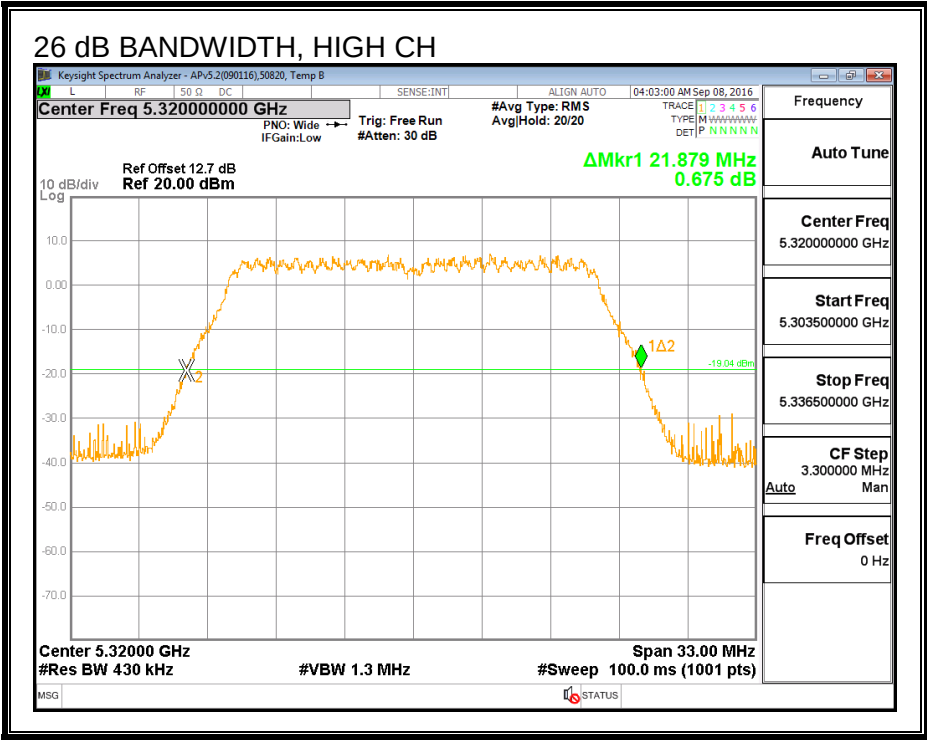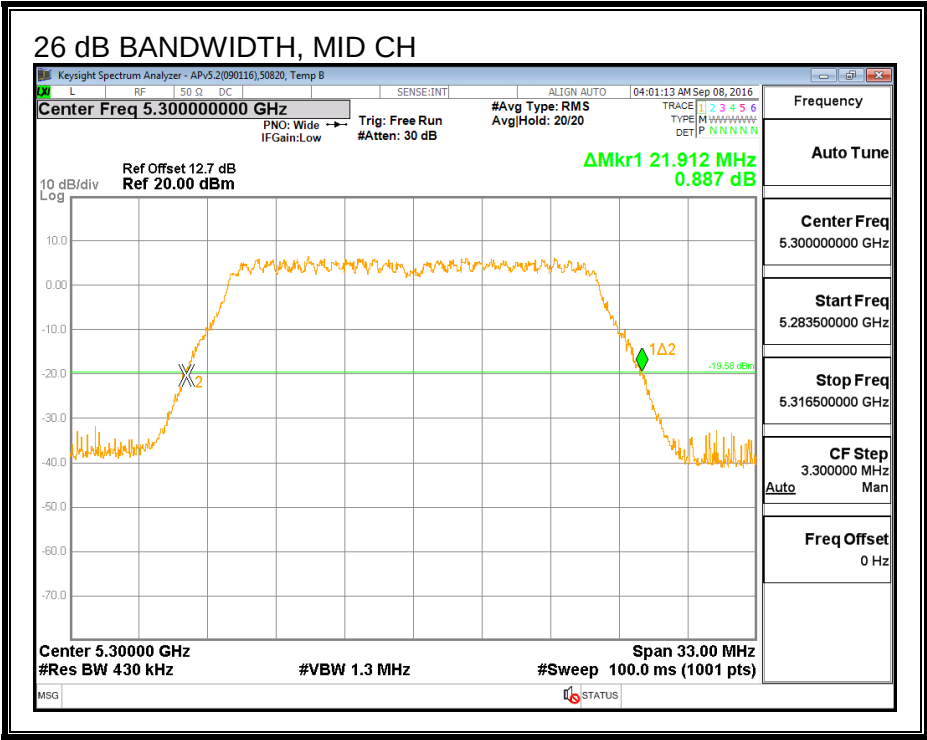

26 DB BANDWIDTH, CHAIN 2

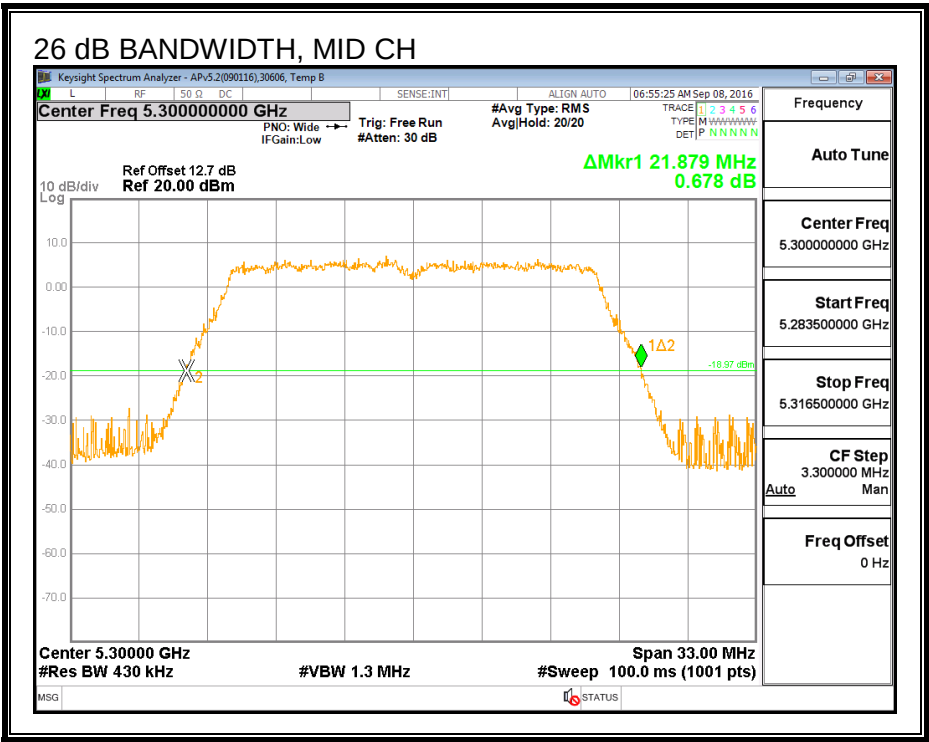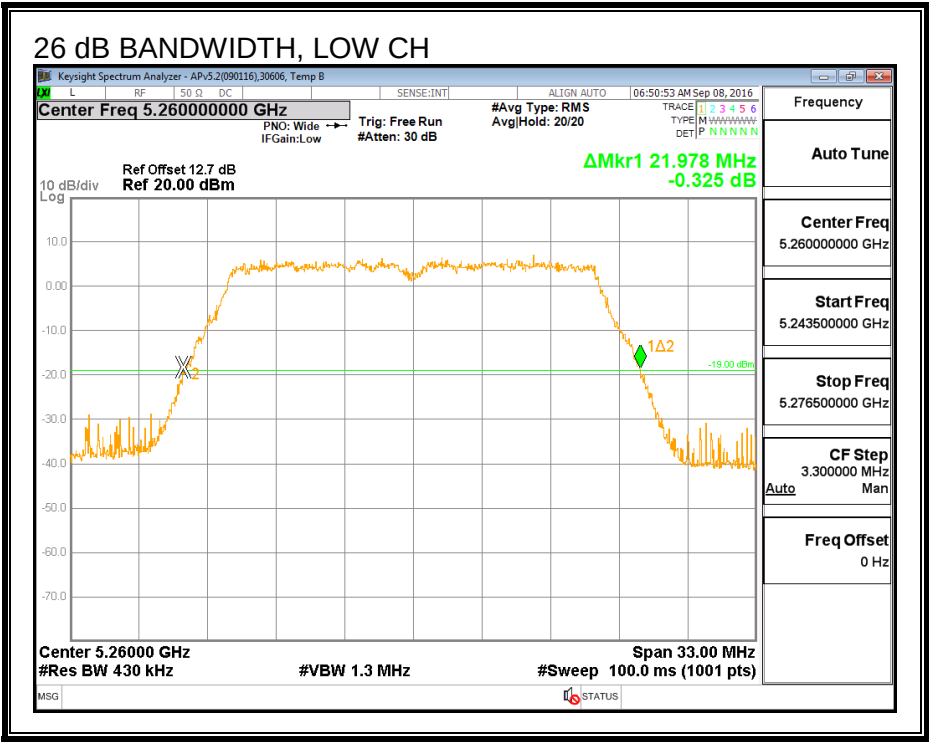

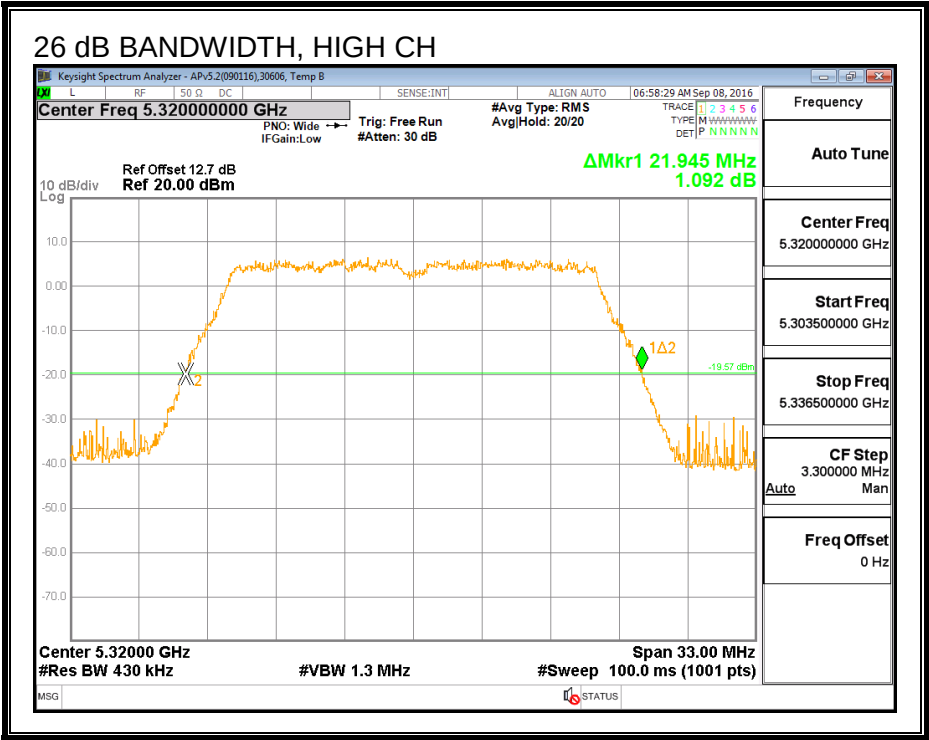

8.14.2. 99% BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS


Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)	99% BW Chain 2 (MHz)
Low	5260	17.900	17.900	17.725
Mid	5300	17.849	17.078	17.851
High	5320	17.770	17.722	17.792



99% BANDWIDTH, CHAIN 0

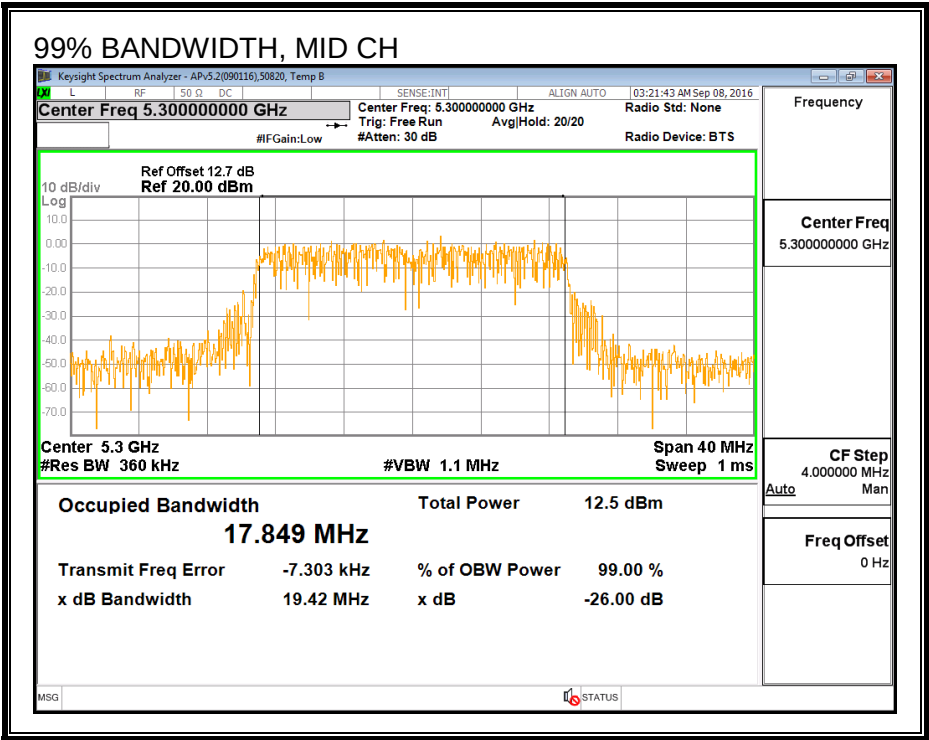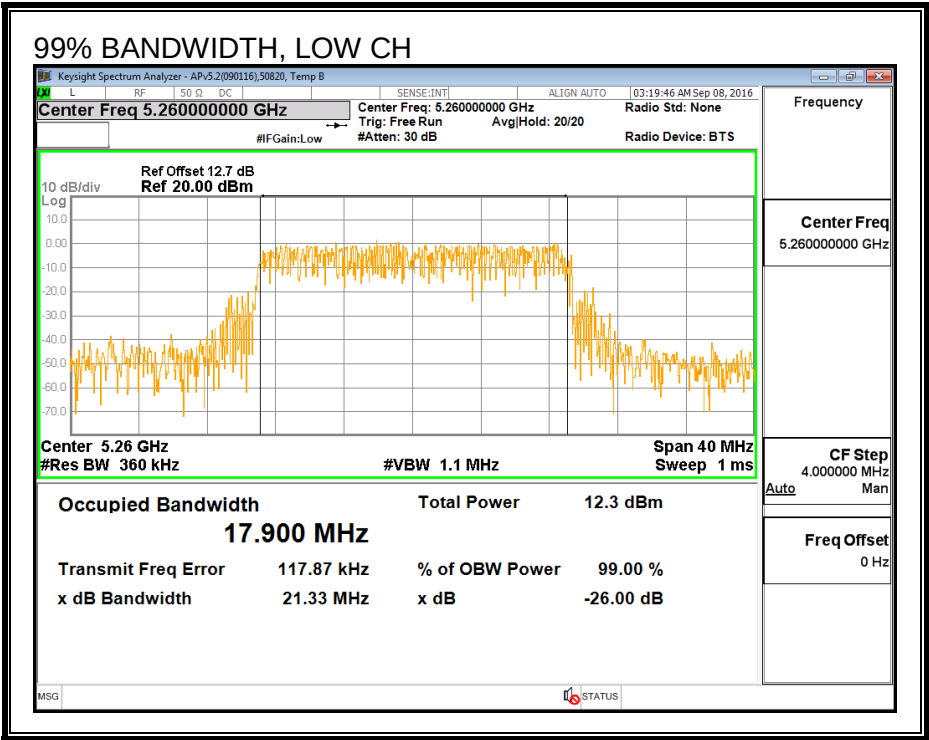


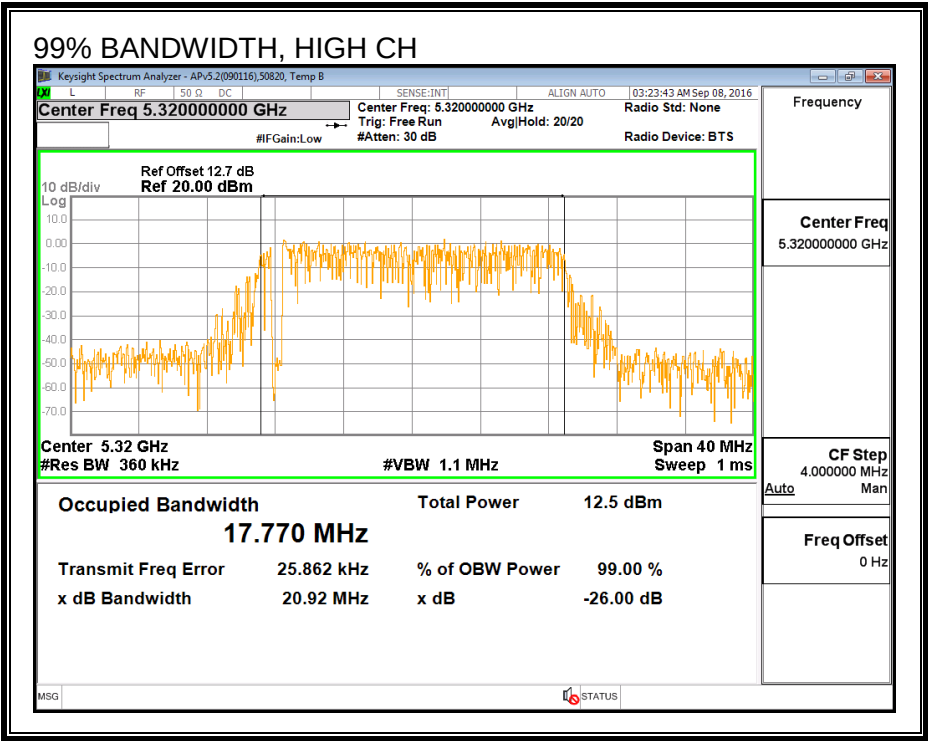



99% BANDWIDTH, CHAIN 1

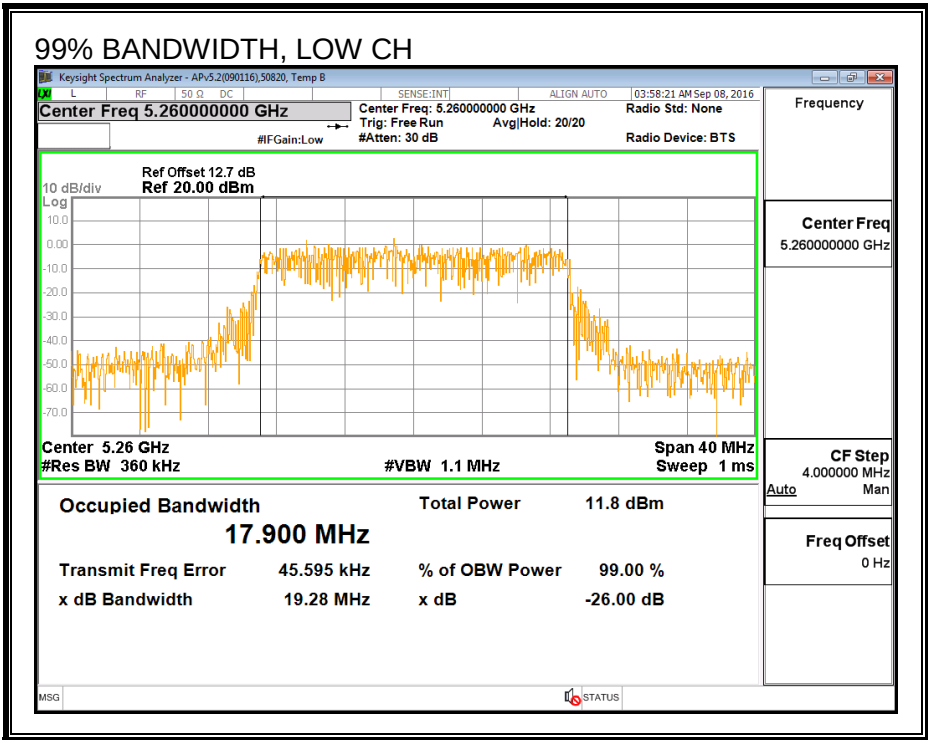

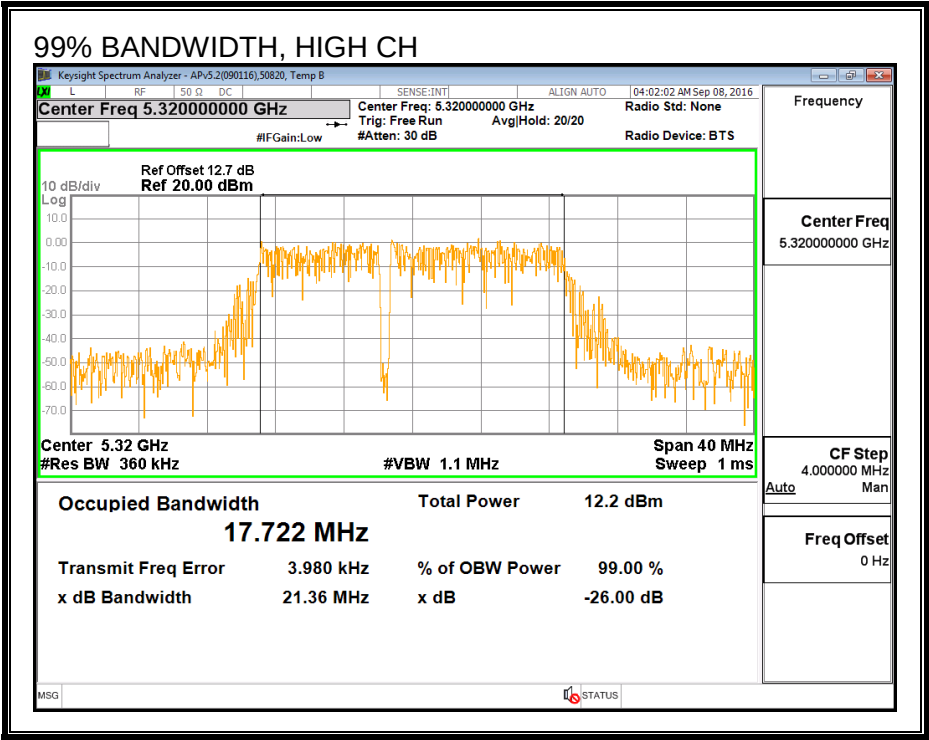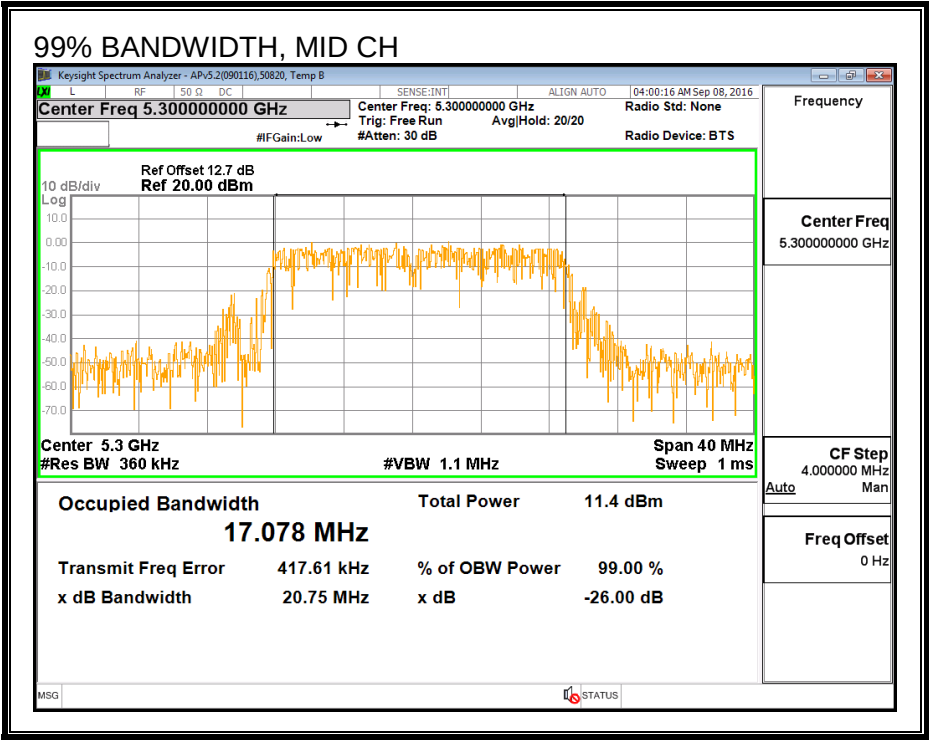

99% BANDWIDTH, CHAIN 2

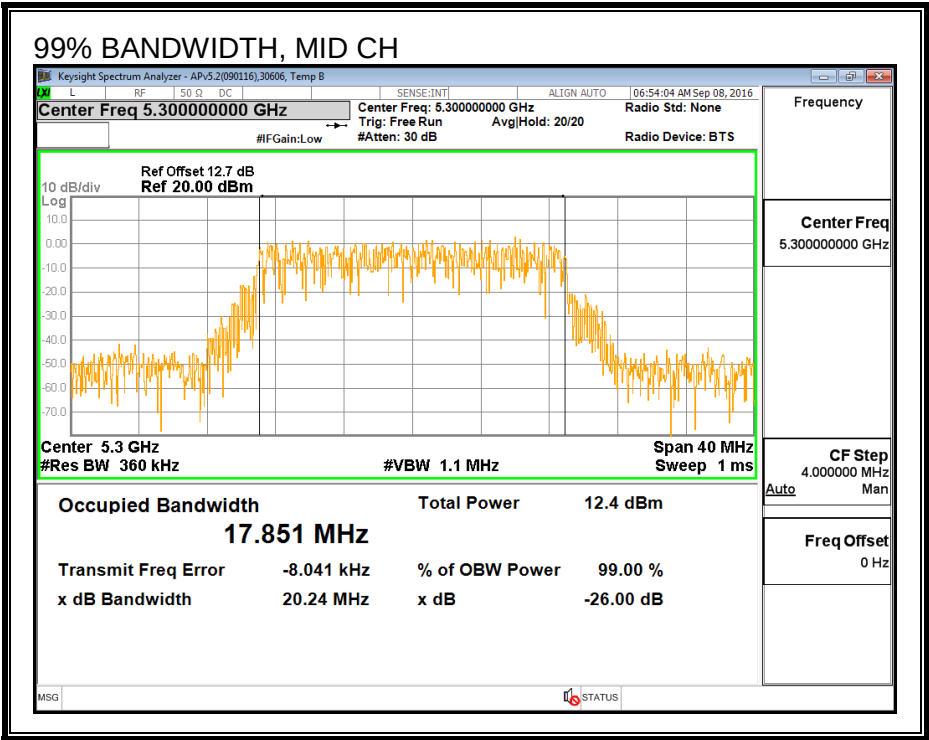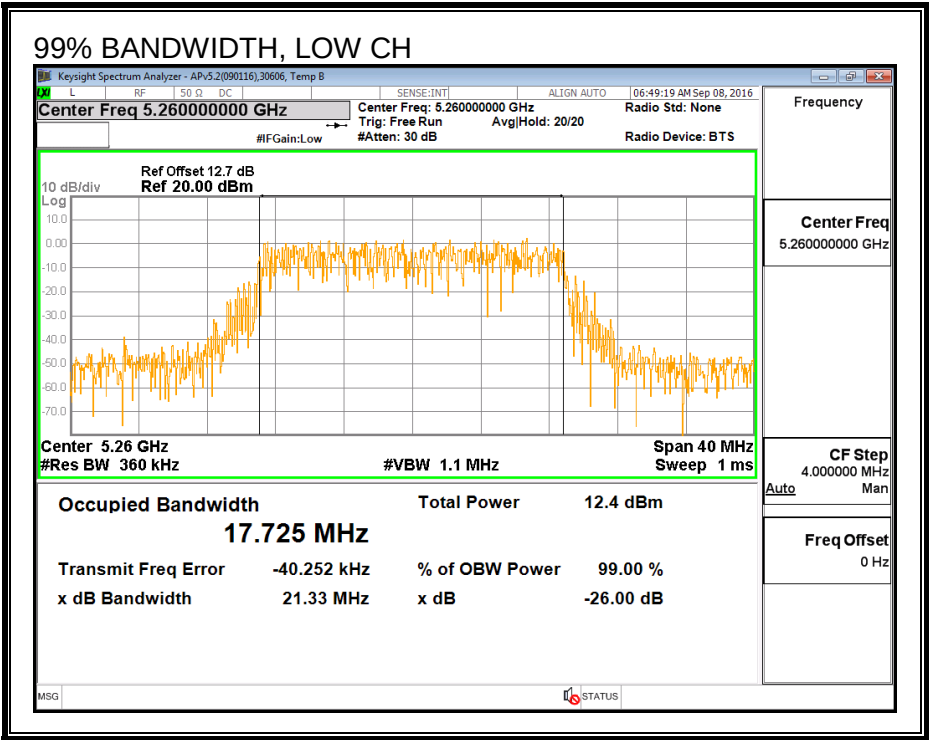

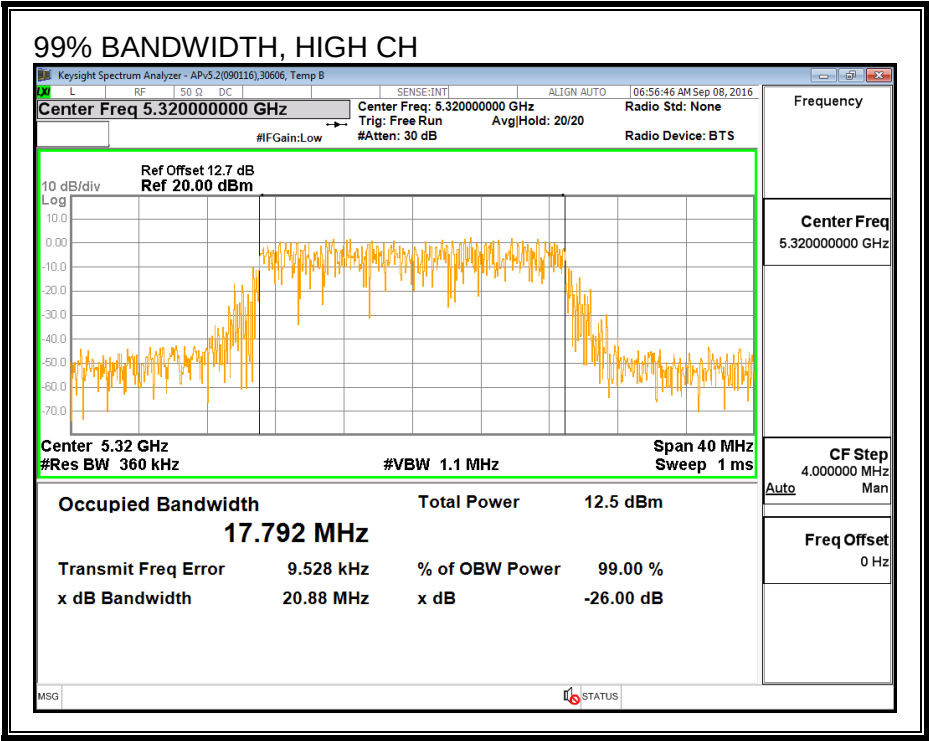

8.14.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	30606	Date:	9/1/16
------------	-------	--------------	--------

Average Power Results

Channel	Frequency (MHz)	Chain 0 Power (dBm)	Chain 1 Power (dBm)	Chain 2 Power (dBm)	Total Power (dBm)
Low	5260	12.48	12.47	12.49	17.25
Mid	5300	12.42	12.47	12.41	17.20
High	5320	12.38	12.49	12.45	17.21

8.14.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26–dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

IC RSS-247 (6.2.2) (1)

The maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10} B$, dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10} B$, dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Chain 2 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
4.90	7.60	6.00	6.31

RESULTS

ID:	30606	Date:	9/1/16
------------	-------	--------------	--------

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5260	21.81	17.725	6.31	6.31	23.18	10.69
Mid	5300	21.88	17.078	6.31	6.31	23.01	10.69
High	5320	21.88	17.722	6.31	6.31	23.18	10.69

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results


Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Chain 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	12.48	12.47	12.49	17.25	23.18	-5.93
Mid	5300	12.42	12.47	12.41	17.20	23.01	-5.81
High	5320	12.38	12.49	12.45	17.21	23.18	-5.96

PSD Results


Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Chain 2 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5260	1.03	1.10	1.03	5.82	10.69	-4.87
Mid	5300	0.85	0.97	0.80	5.64	10.69	-5.05
High	5320	0.75	0.69	0.86	5.54	10.69	-5.15



PSD, CHAIN 0

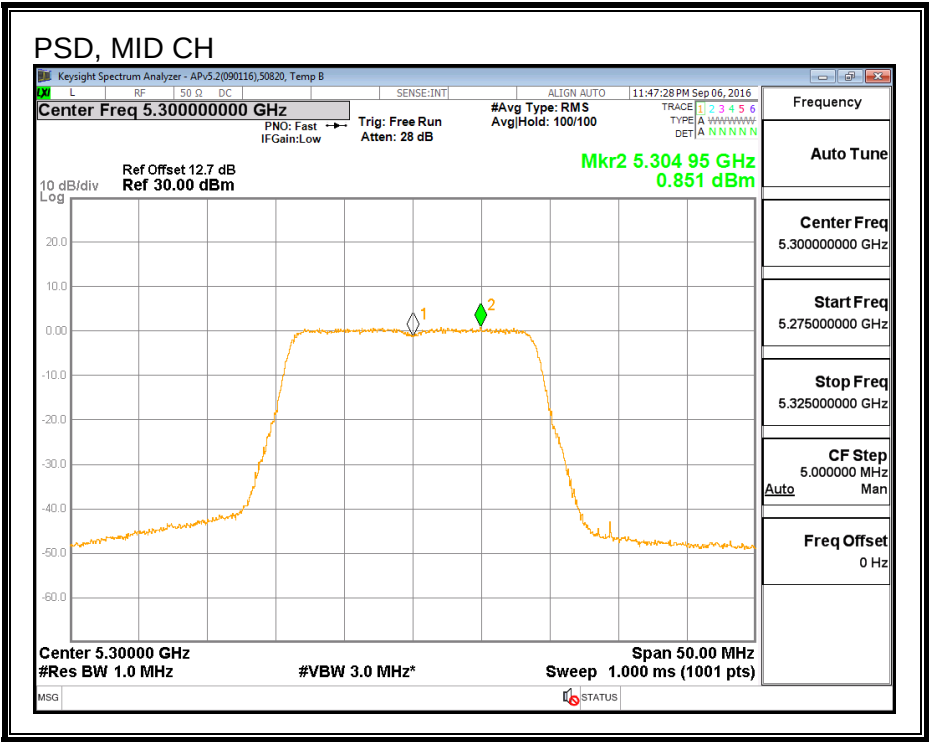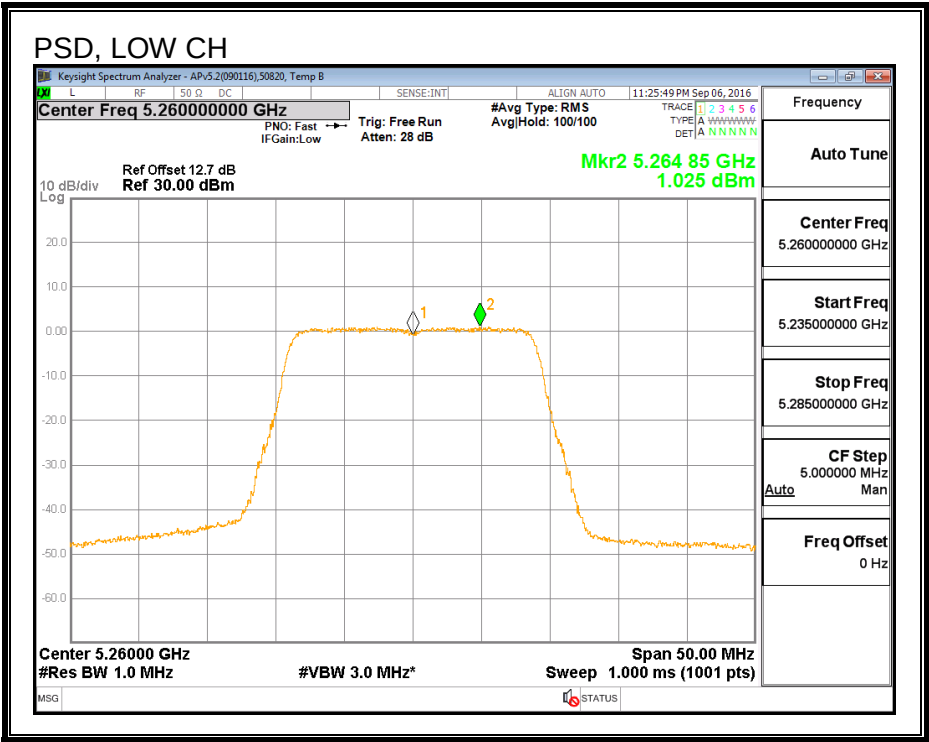


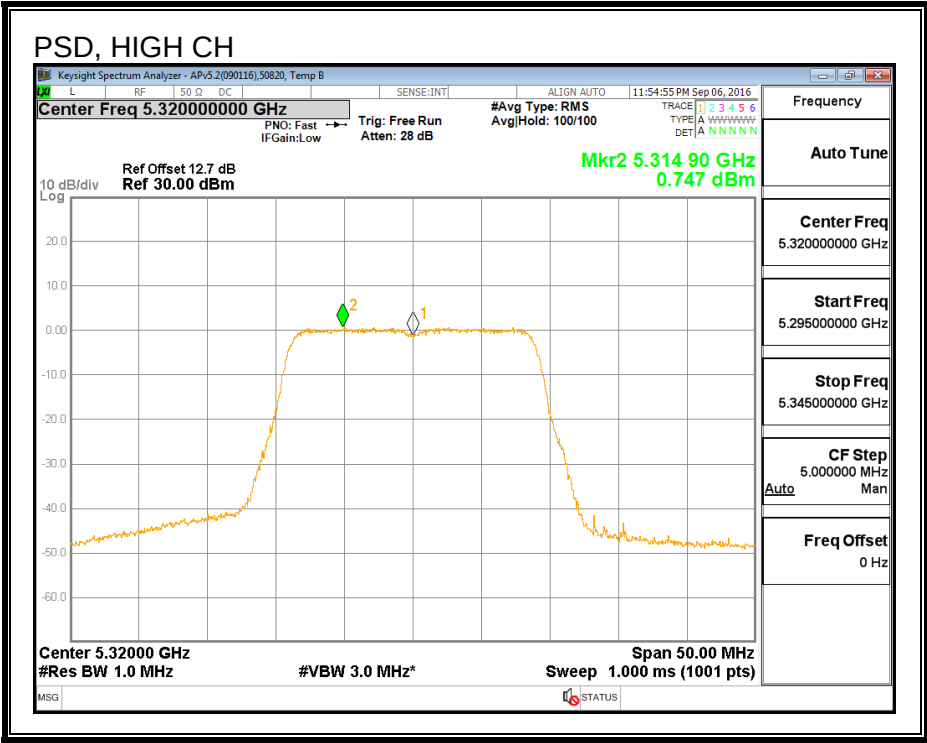



PSD, CHAIN 1

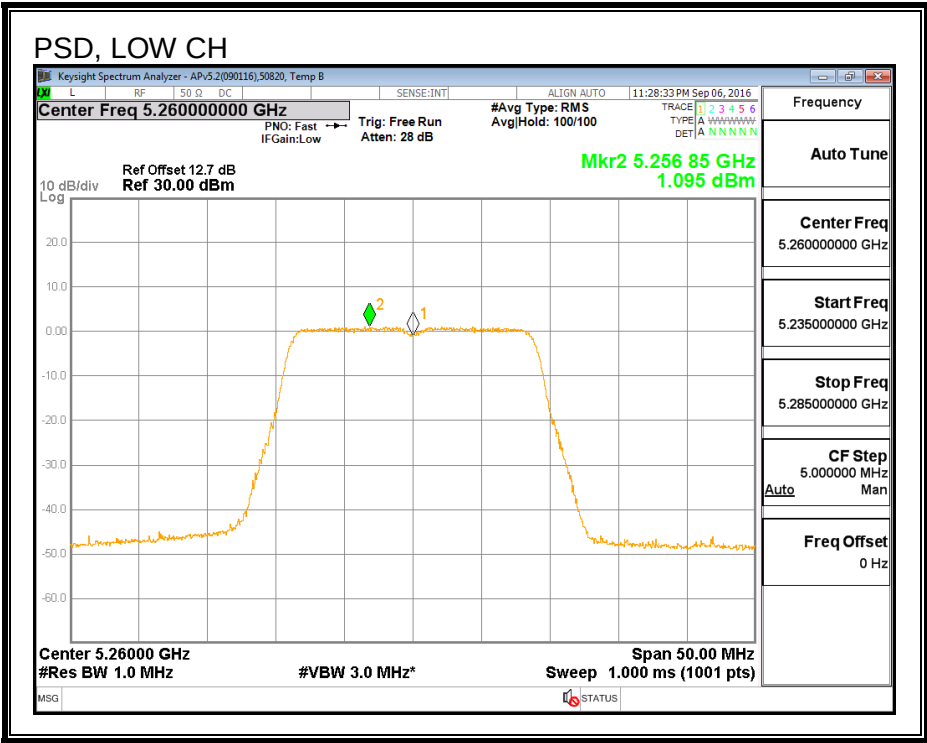

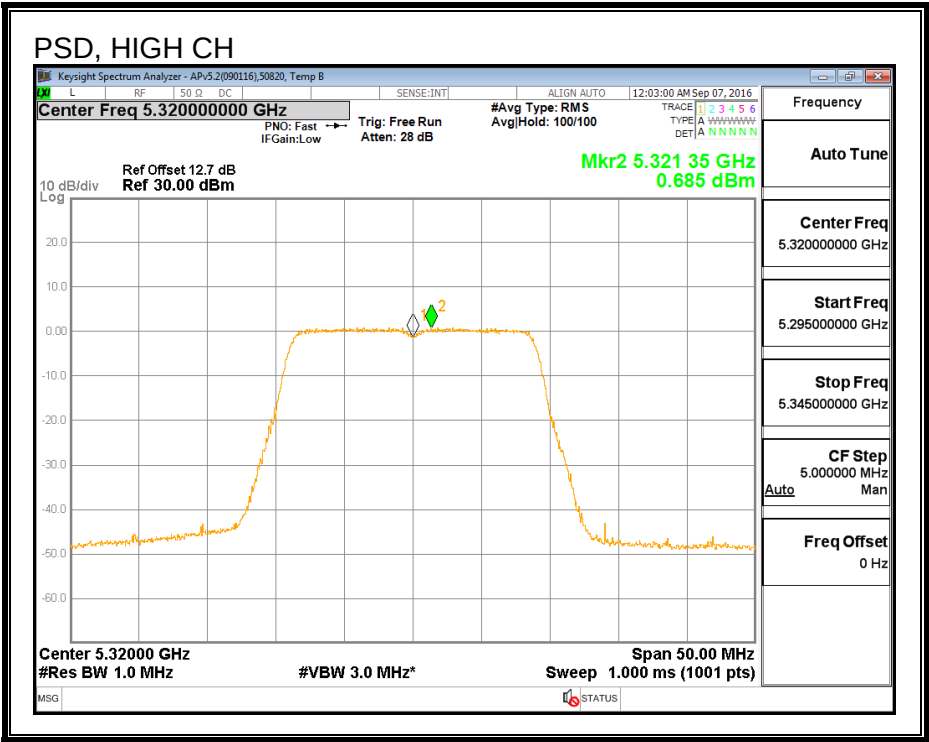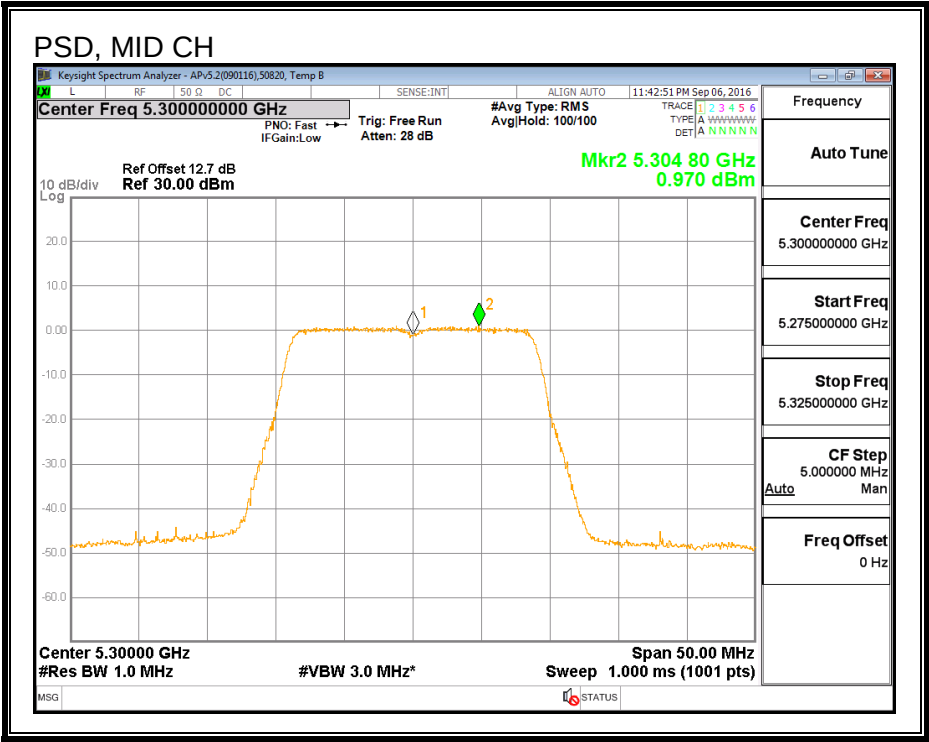

PSD, CHAIN 2

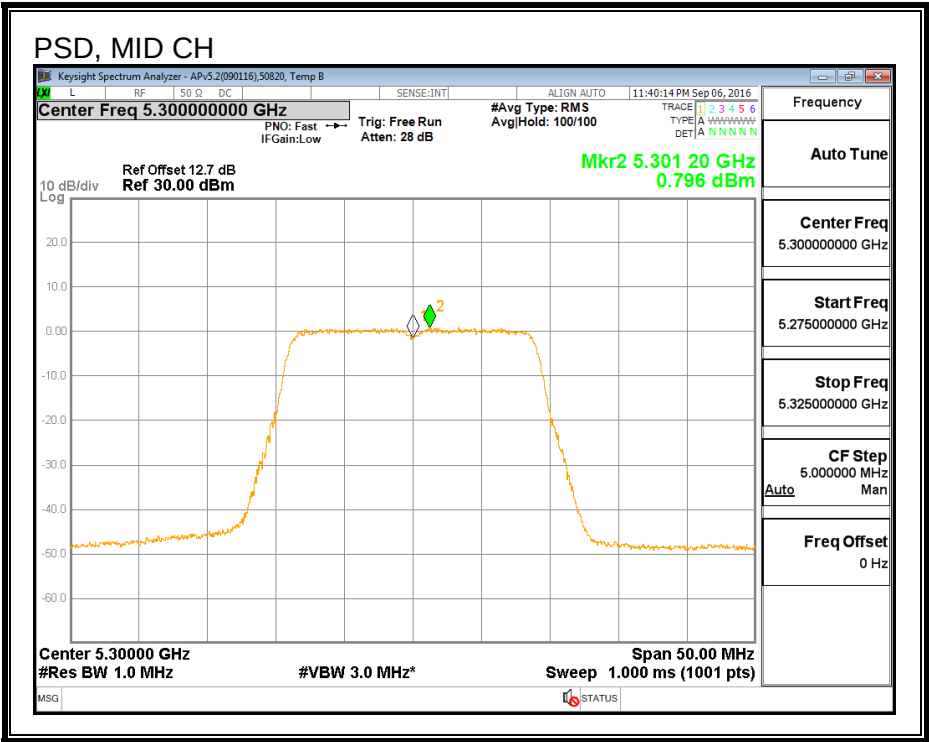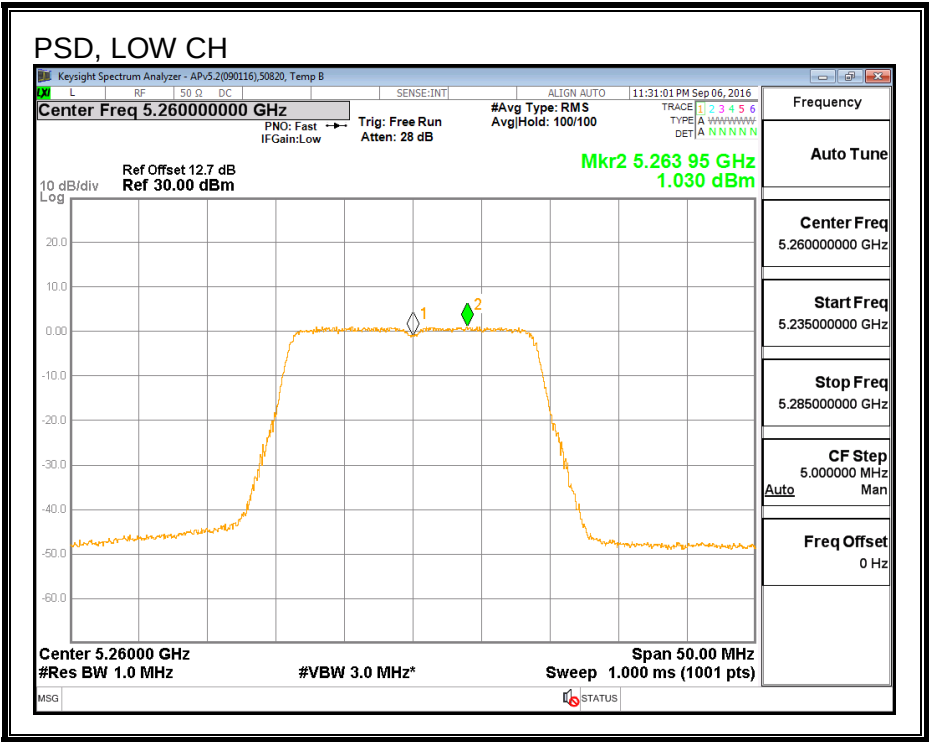

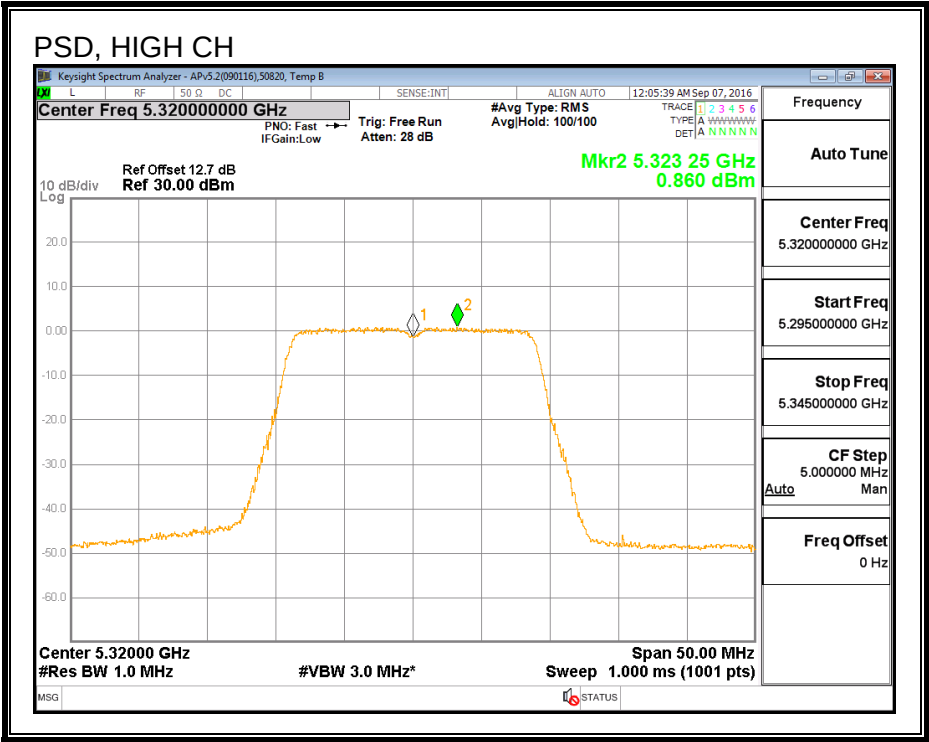

8.15. 802.11ac VHT20 3Tx BEAM FORMING MODE IN THE 5.3 GHz BAND

8.15.1. 26 dB BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS


Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)	26 dB BW Chain 2 (MHz)
Low	5260	21.879	21.714	21.813
Mid	5300	21.747	21.714	21.912
High	5320	21.945	21.780	21.747



26 DB BANDWIDTH, CHAIN 0

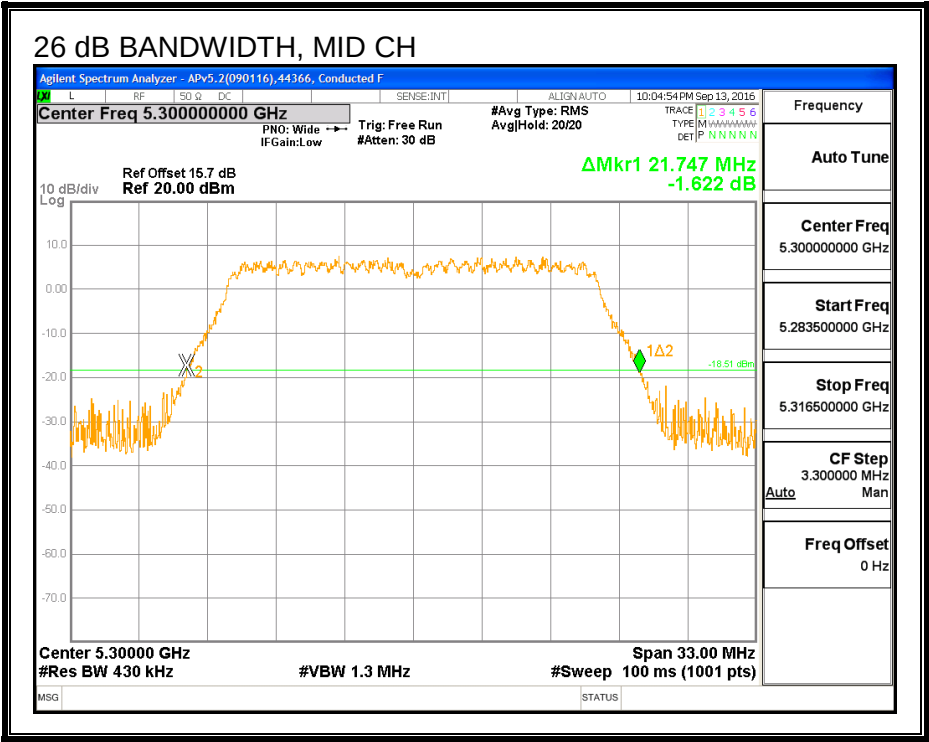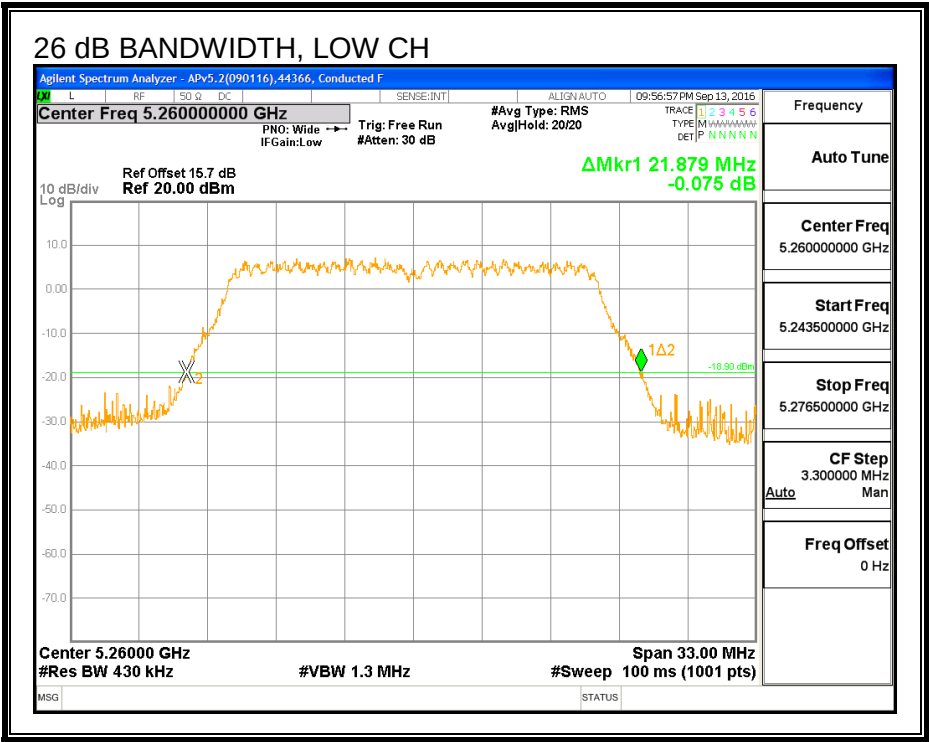

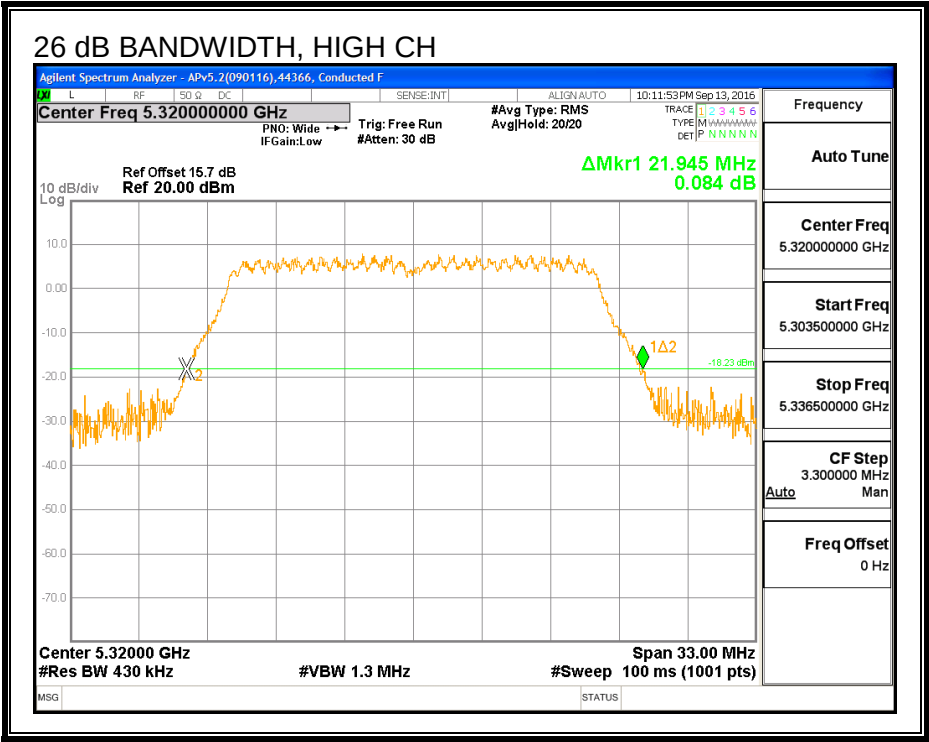




26 DB BANDWIDTH, CHAIN 1

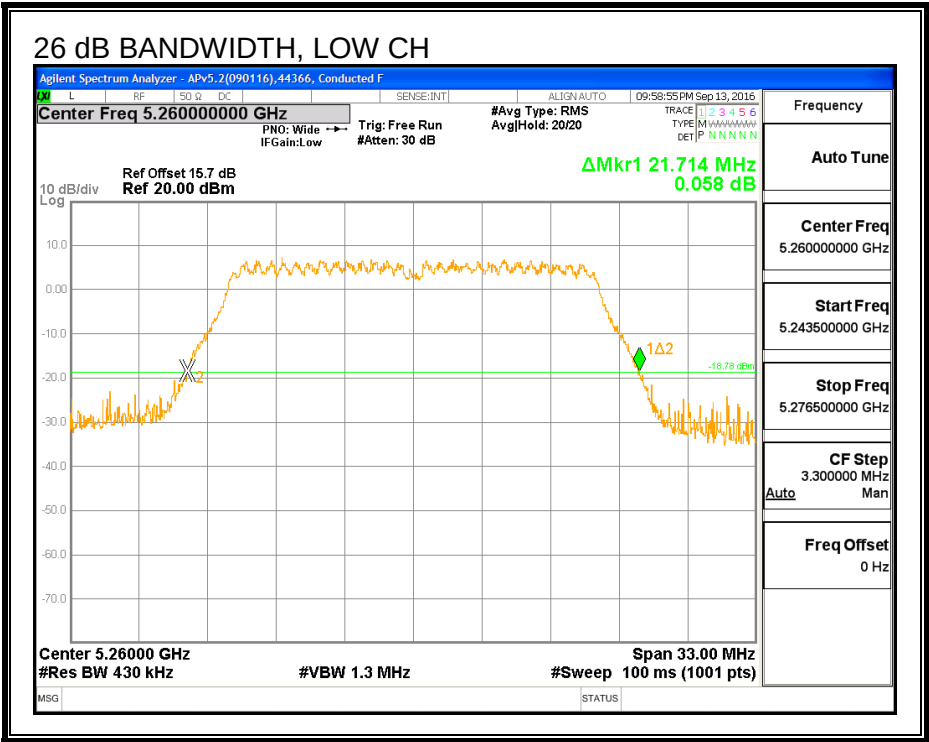

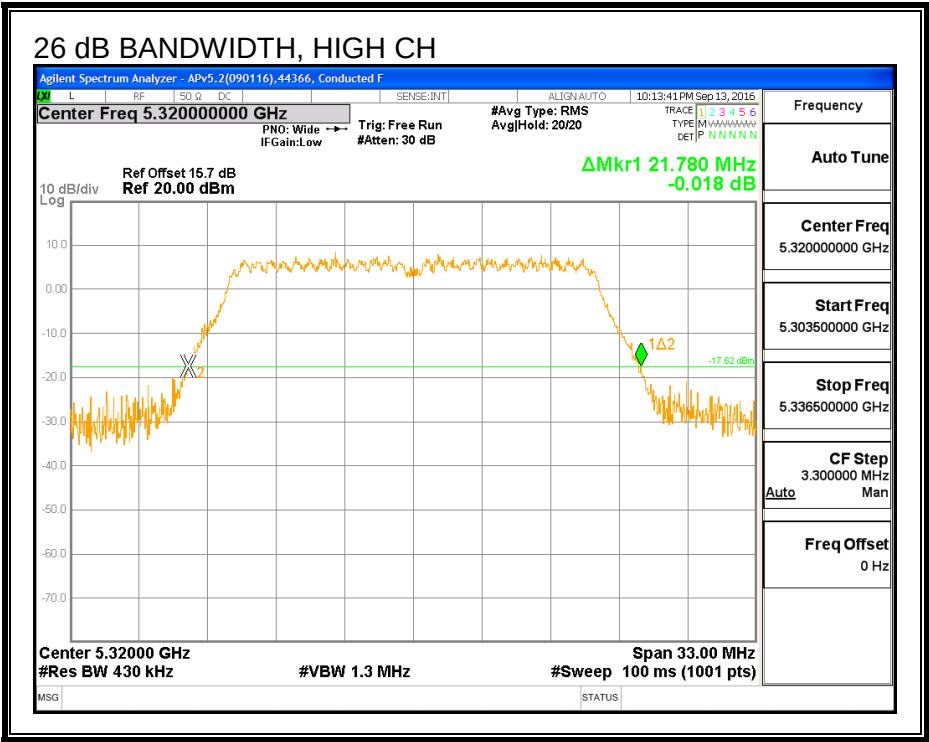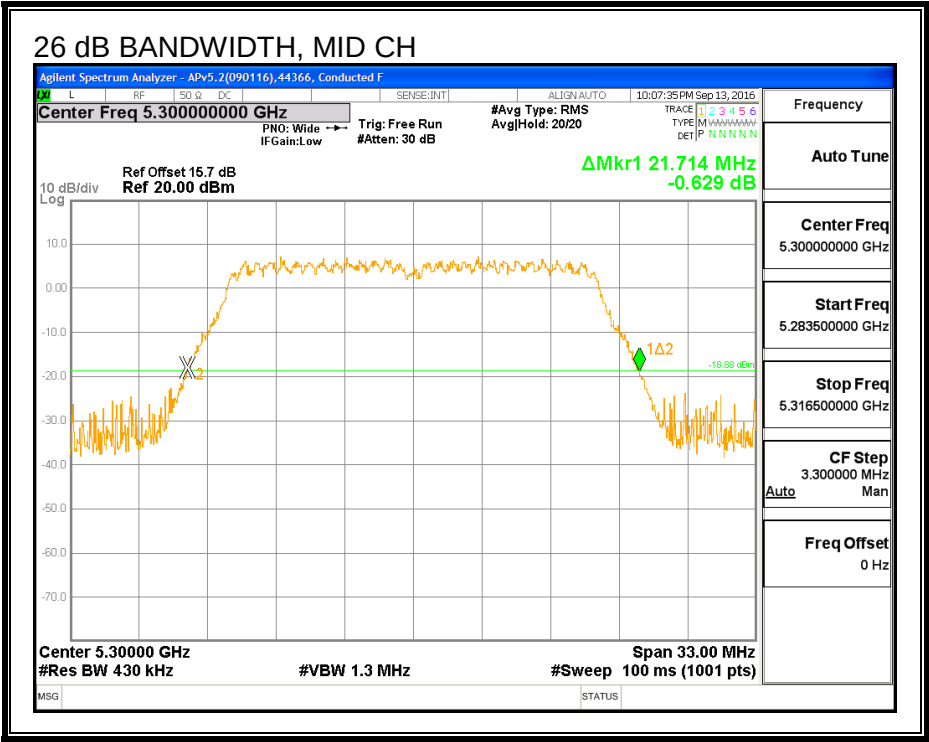

26 DB BANDWIDTH, CHAIN 2

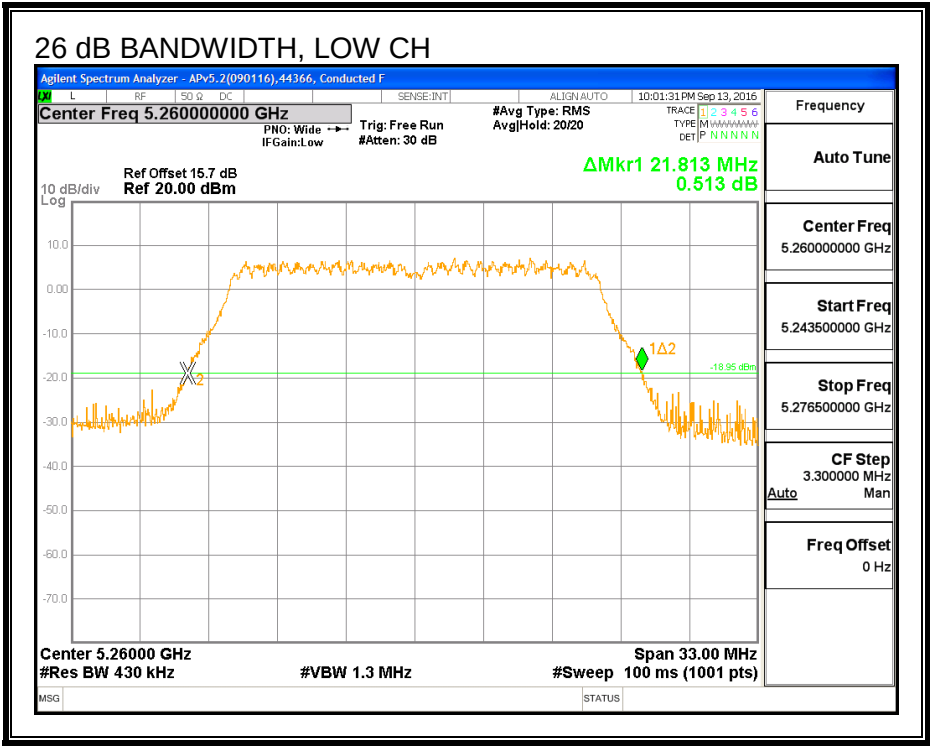

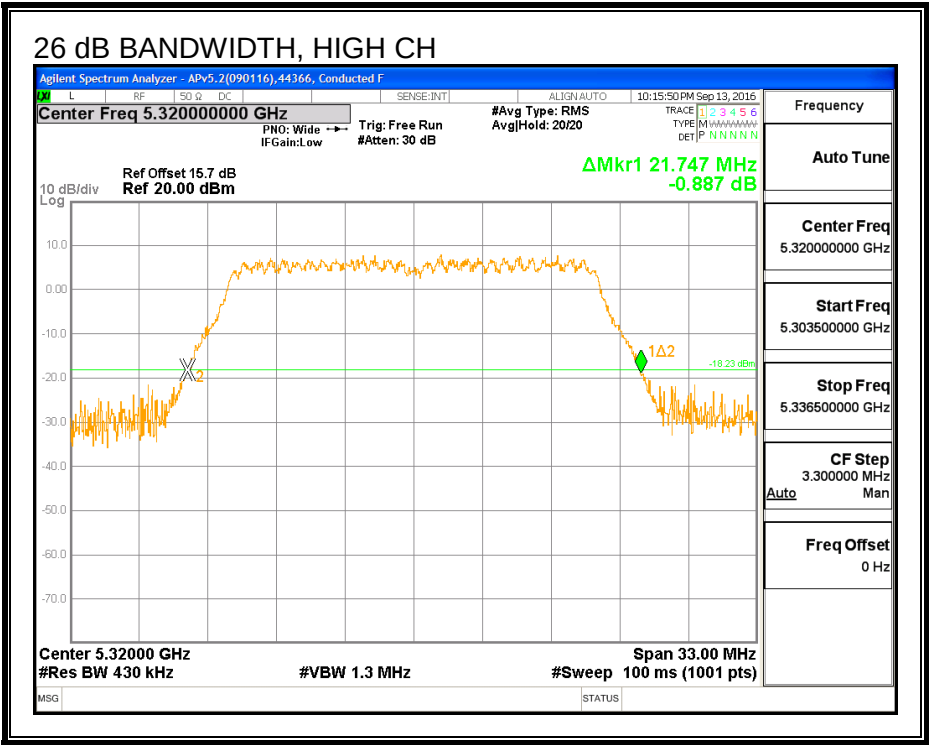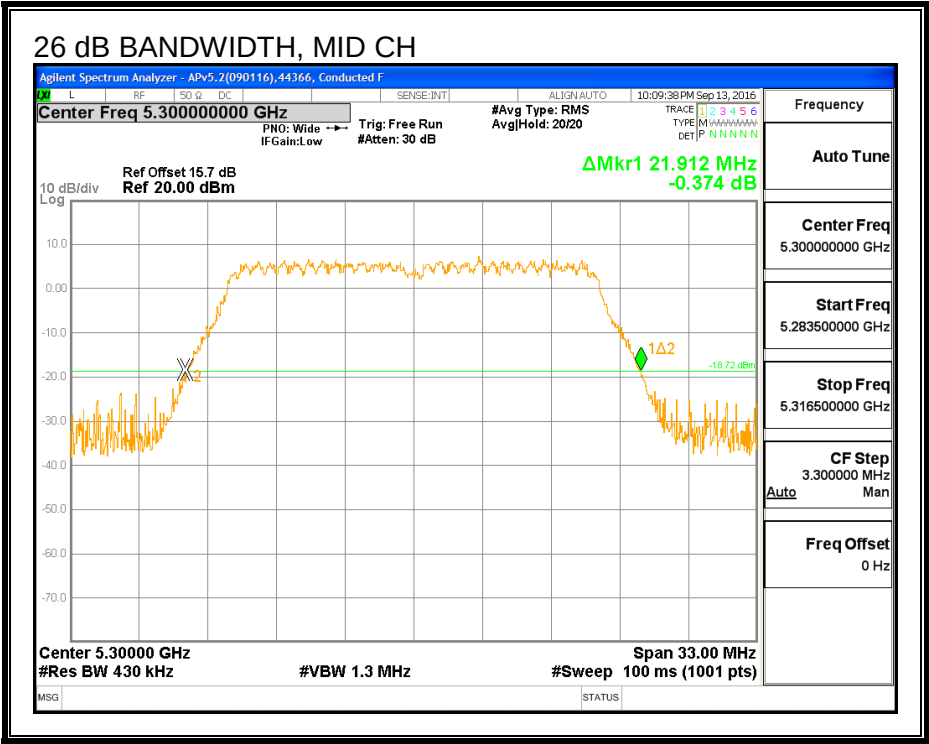

8.15.2. 99% BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS


Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)	99% BW Chain 2 (MHz)
Low	5260	17.850	17.634	17.773
Mid	5300	17.833	17.754	17.764
High	5320	17.817	17.982	17.813



99% BANDWIDTH, CHAIN 0

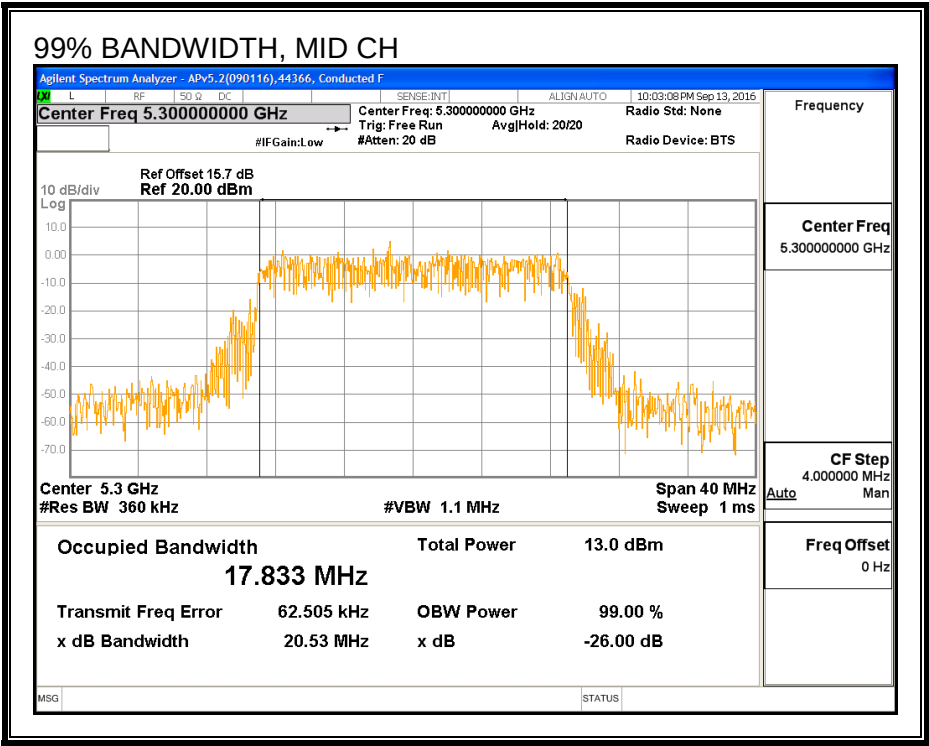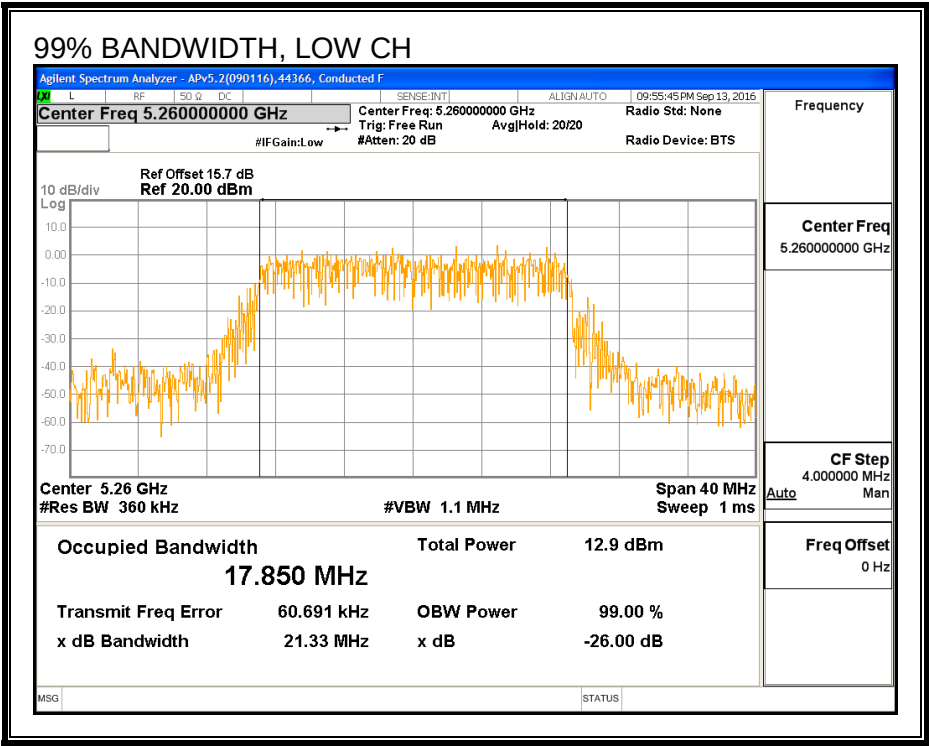

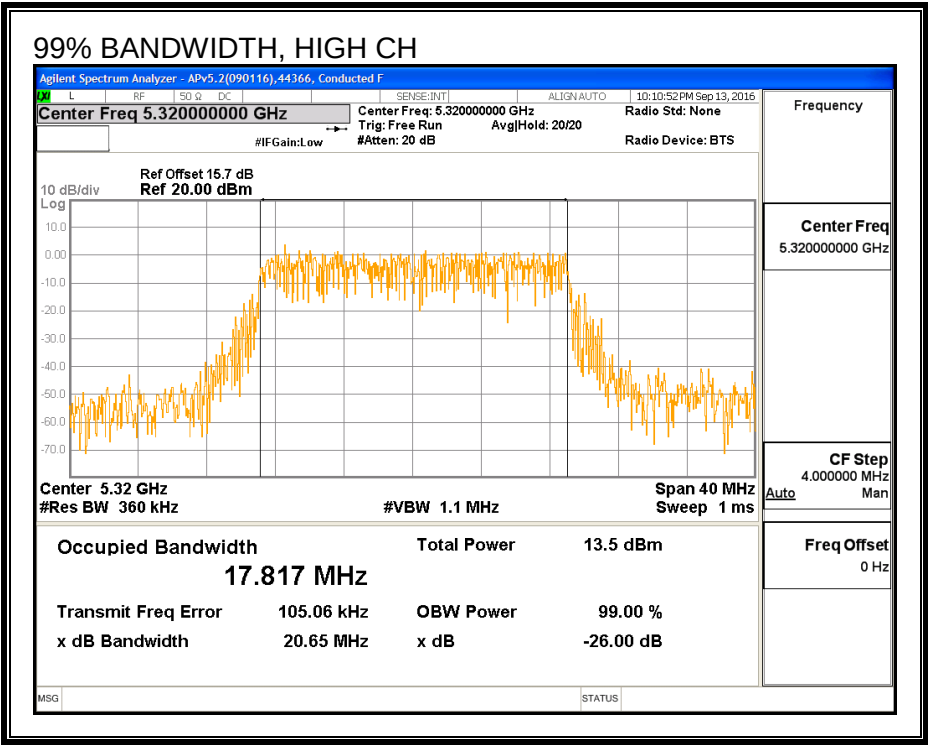




99% BANDWIDTH, CHAIN 1

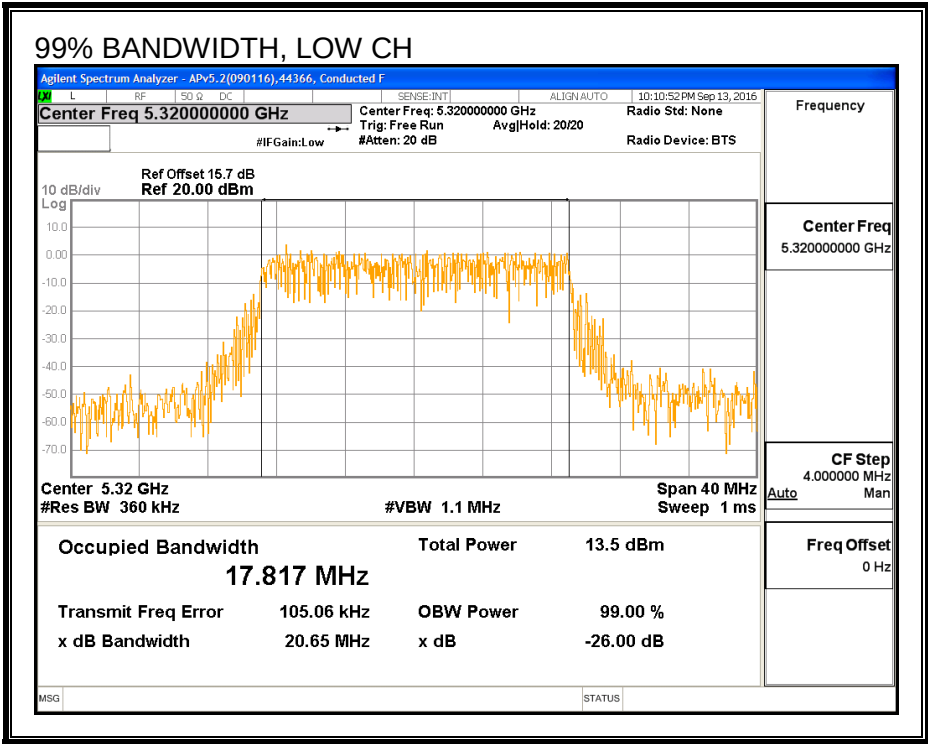

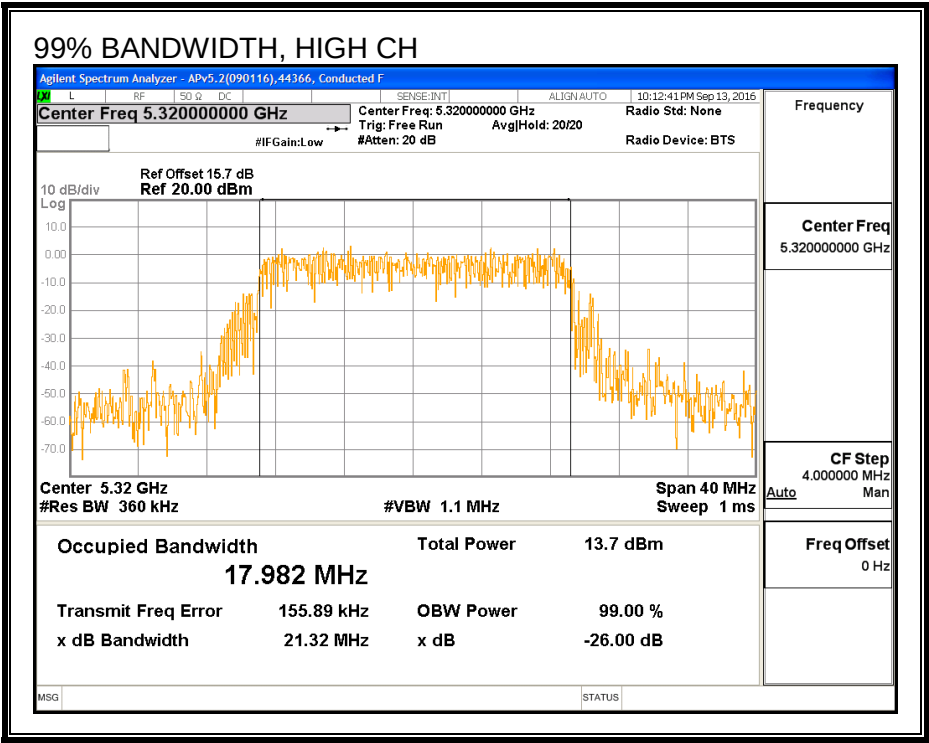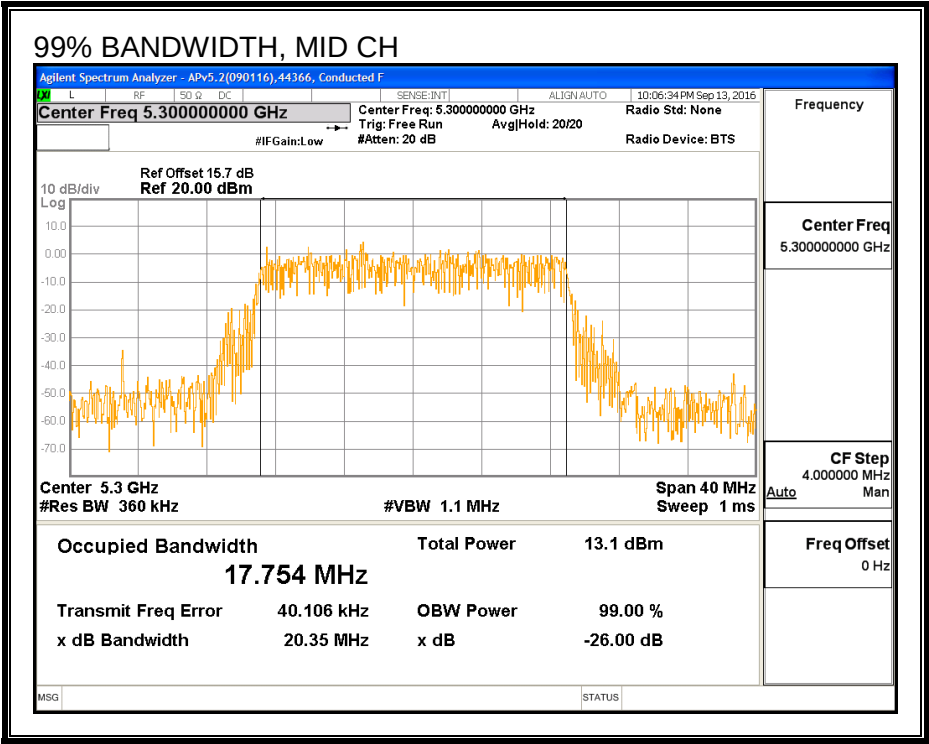

99% BANDWIDTH, CHAIN 2

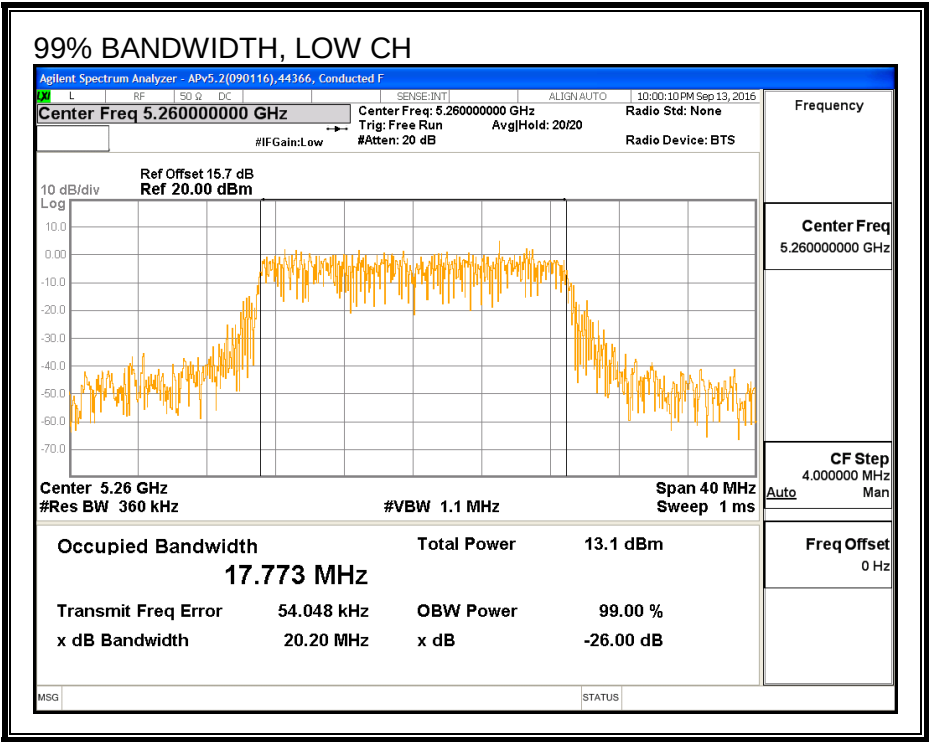

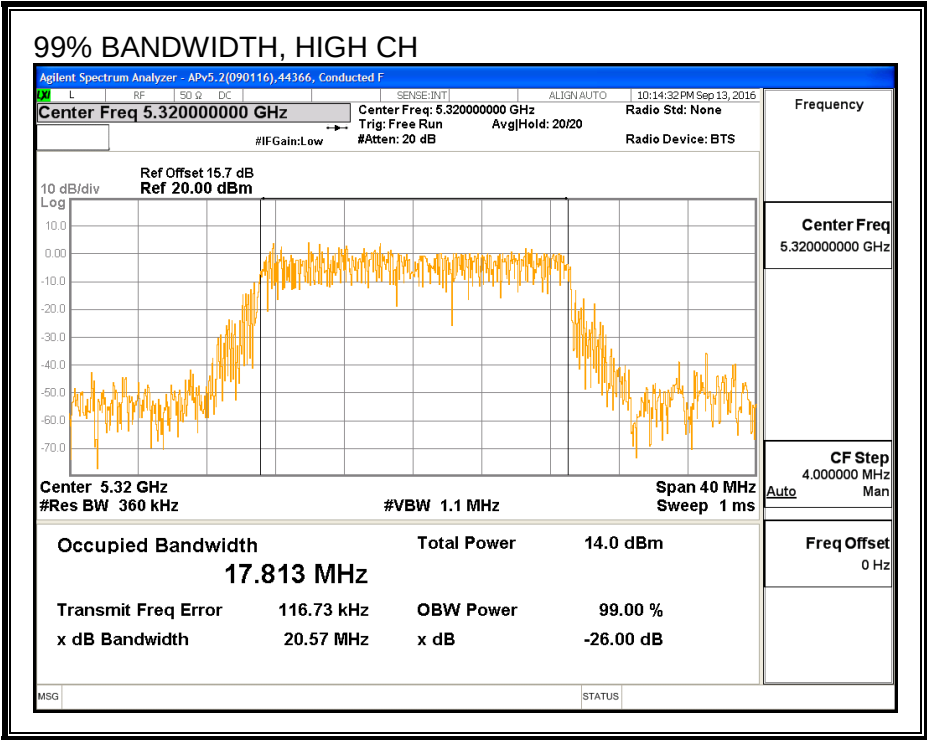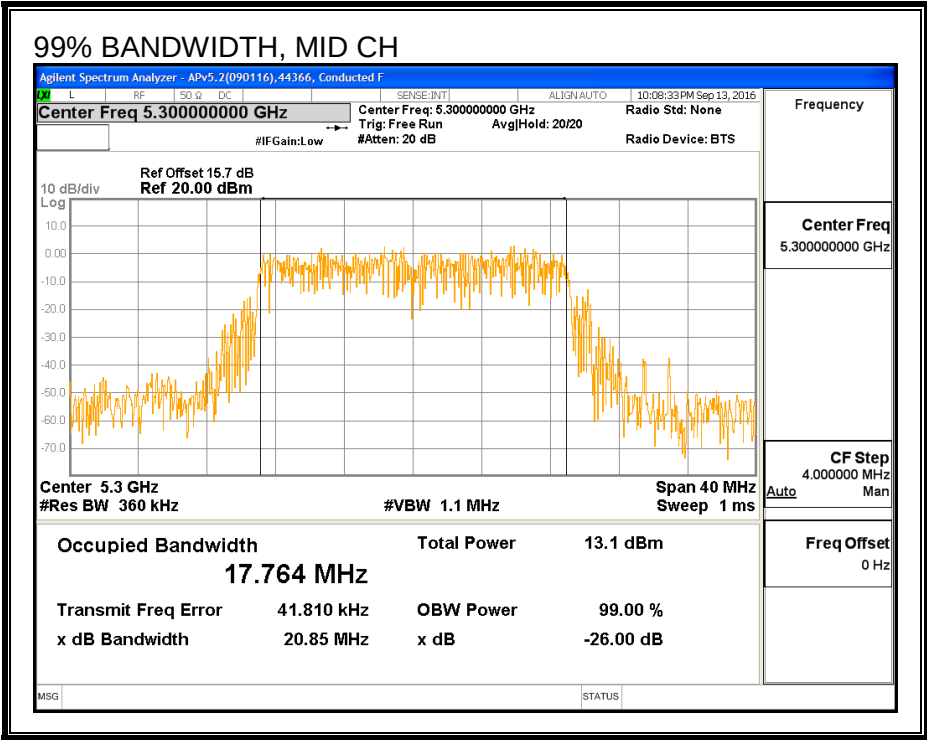

8.15.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	44366	Date:	9/13/16
------------	-------	--------------	---------

Average Power Results

Channel	Frequency (MHz)	Chain 0 Power (dBm)	Chain 1 Power (dBm)	Chain 2 Power (dBm)	Total Power (dBm)
Low	5260	8.86	8.94	8.90	13.67
Mid	5300	8.94	8.85	8.85	13.65
High	5320	8.87	8.79	8.87	13.61

8.15.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26–dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

IC RSS-247 (6.2.2) (1)

The maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10} B$, dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10} B$, dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Chain 2 Antenna Gain (dBi)	Correlated Chains Directional Gain (dBi)
4.90	7.60	6.00	11.01

RESULTS

ID:	44366	Date:	9/13/16
------------	-------	--------------	---------

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5260	21.71	17.634	11.01	11.01	18.45	5.99
Mid	5300	21.71	17.754	11.01	11.01	18.48	5.99
High	5320	21.75	17.813	11.01	11.01	18.50	5.99

Duty Cycle CF (dB)	0.69	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results


Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Chain 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	8.86	8.94	8.90	13.67	18.45	-4.78
Mid	5300	8.94	8.85	8.85	13.65	18.48	-4.83
High	5320	8.87	8.79	8.87	13.61	18.50	-4.88

PSD Results


Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Chain 2 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5260	-2.54	-2.47	-2.30	3.03	5.99	-2.96
Mid	5300	-2.48	-2.53	-2.59	2.93	5.99	-3.06
High	5320	-2.51	-2.64	-2.55	2.89	5.99	-3.10



PSD, CHAIN 0

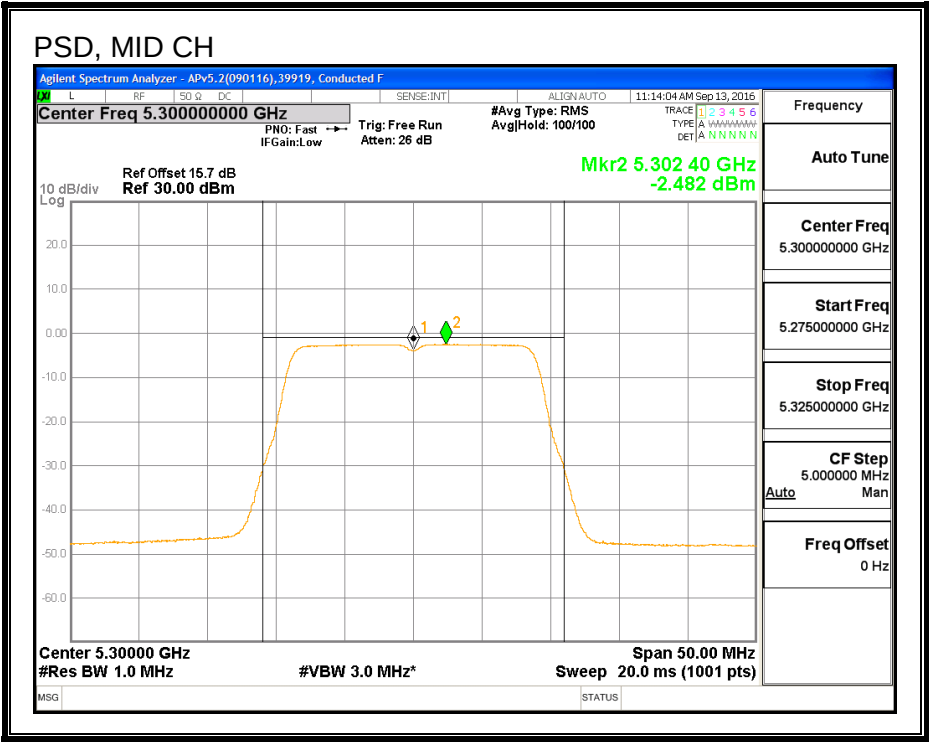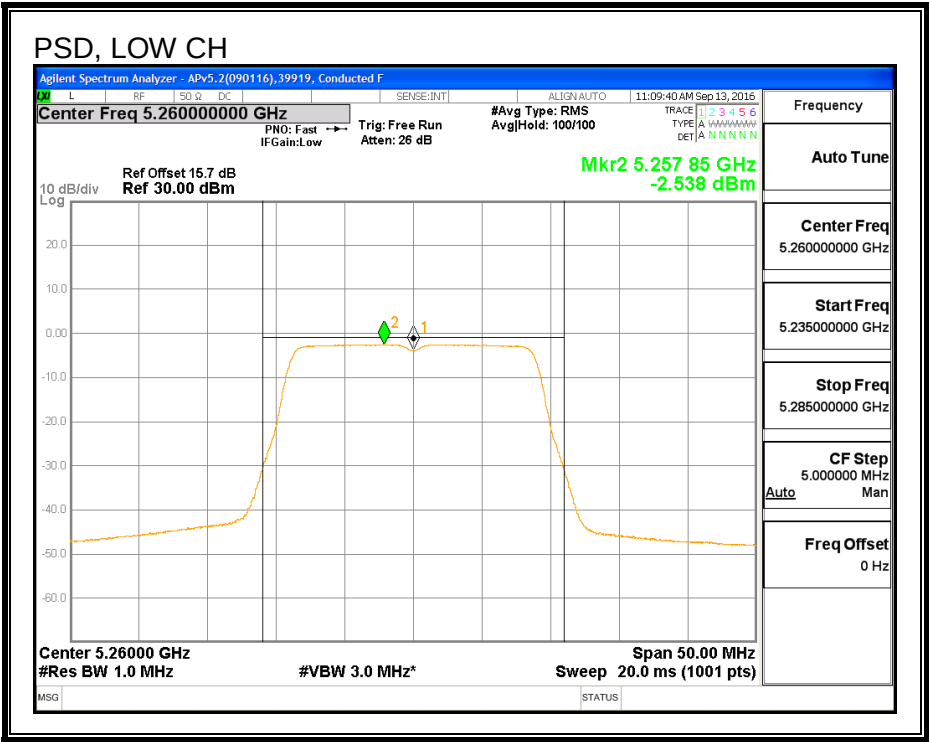


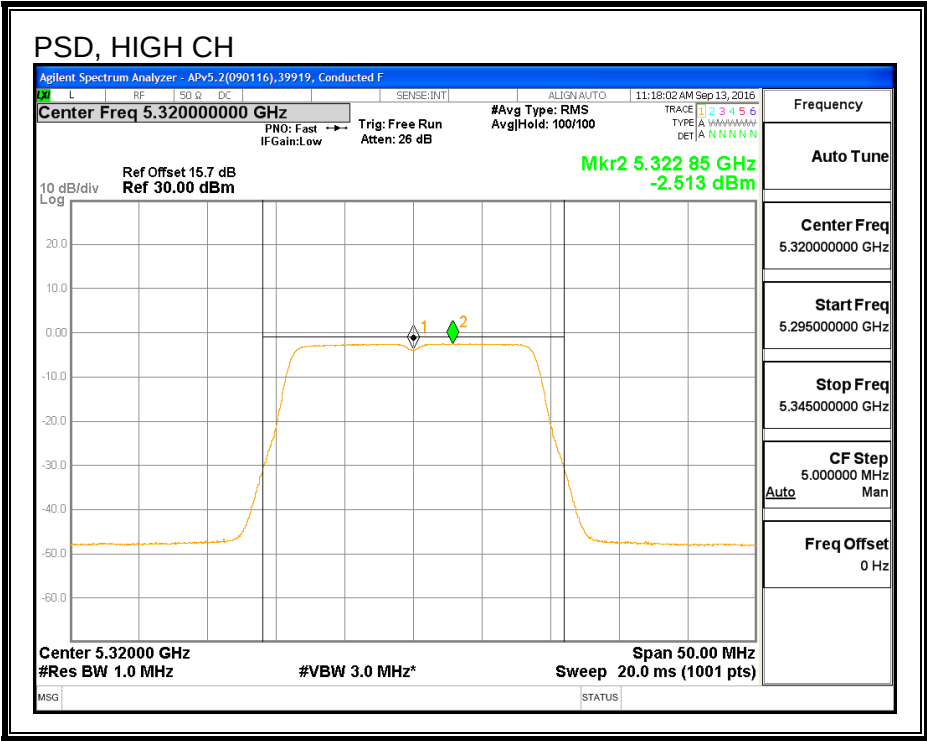



PSD, CHAIN 1

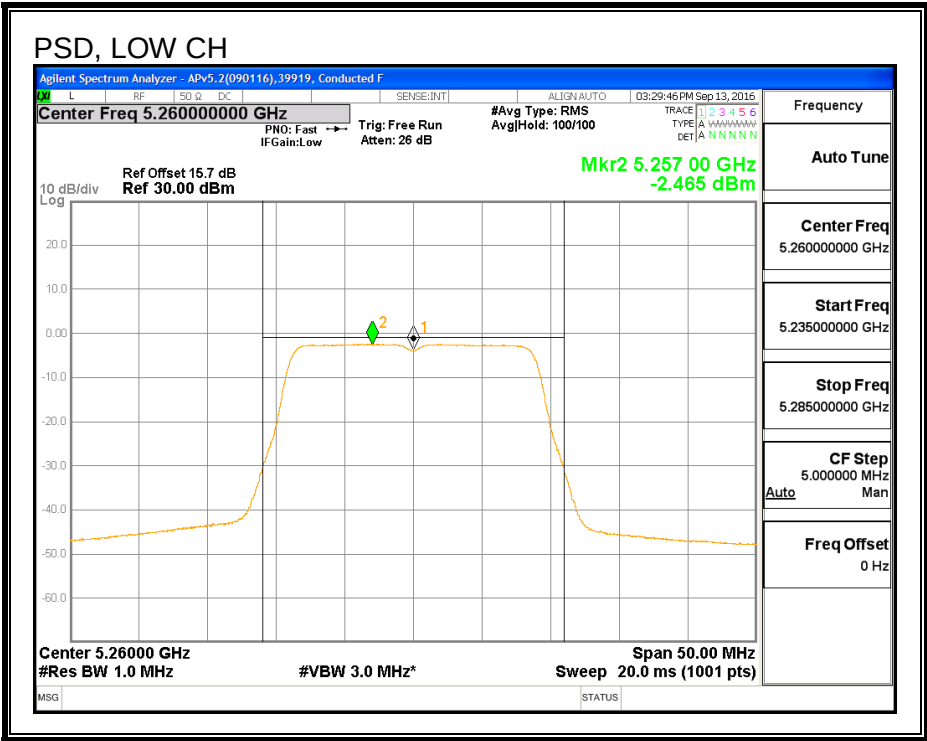

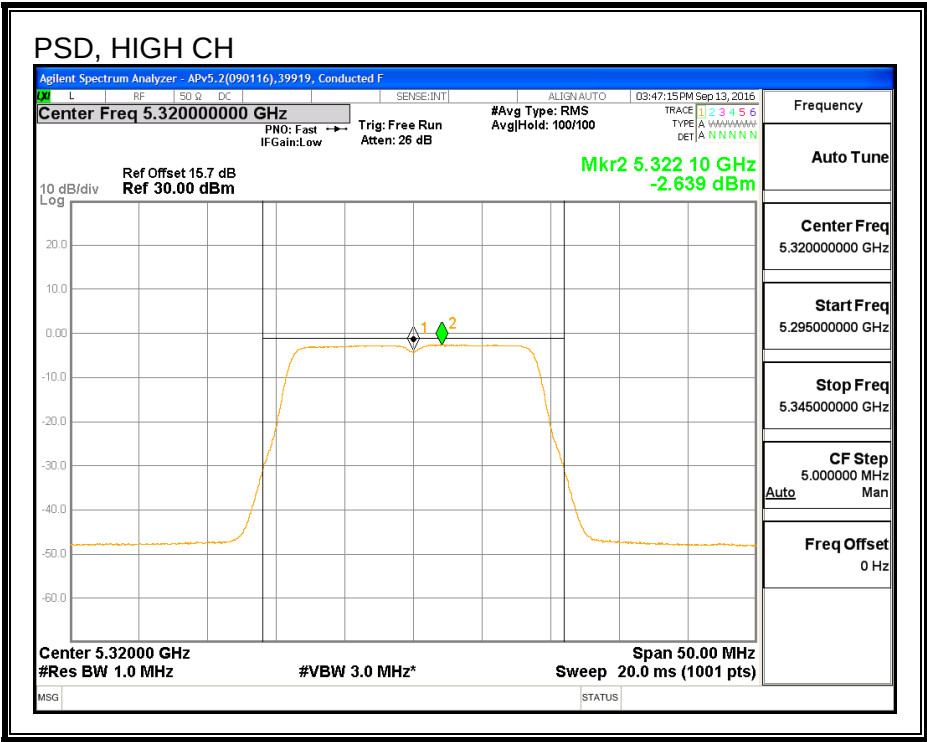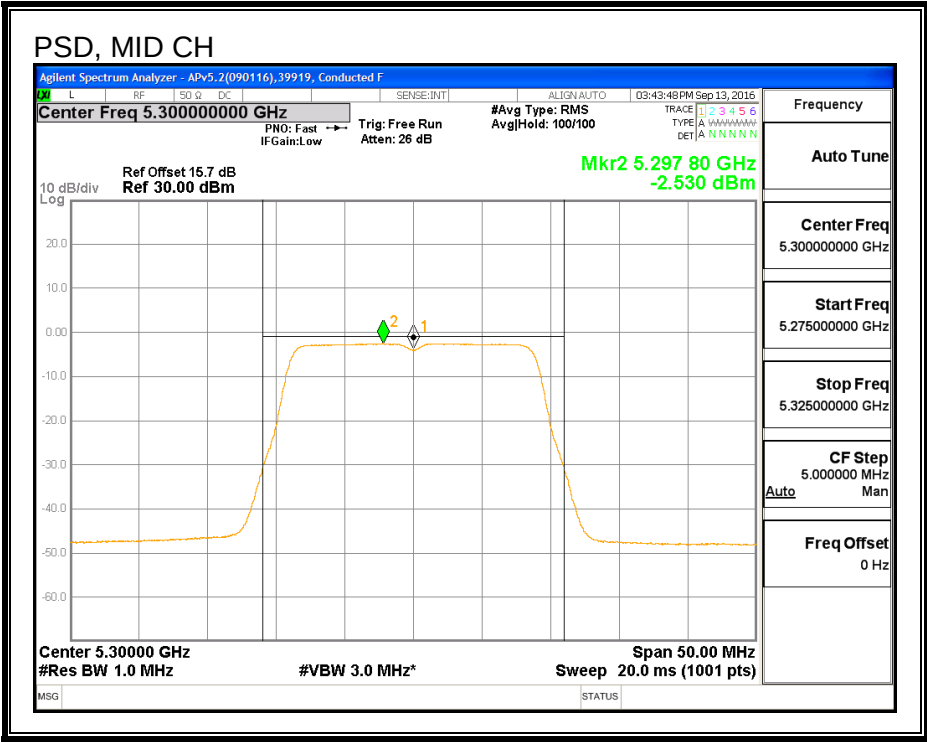

PSD, CHAIN 2

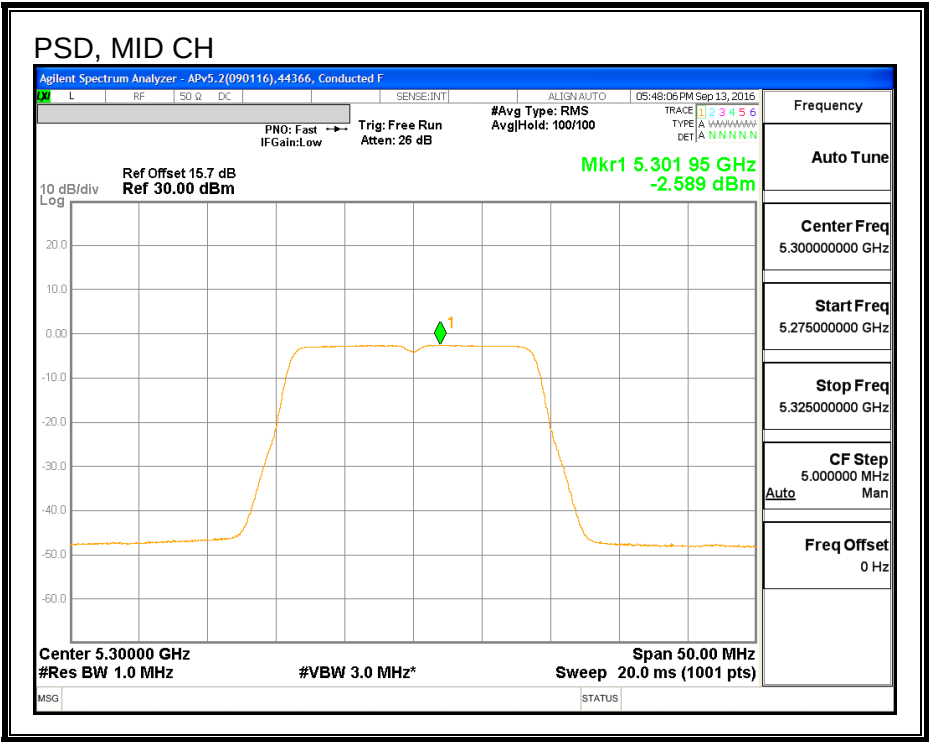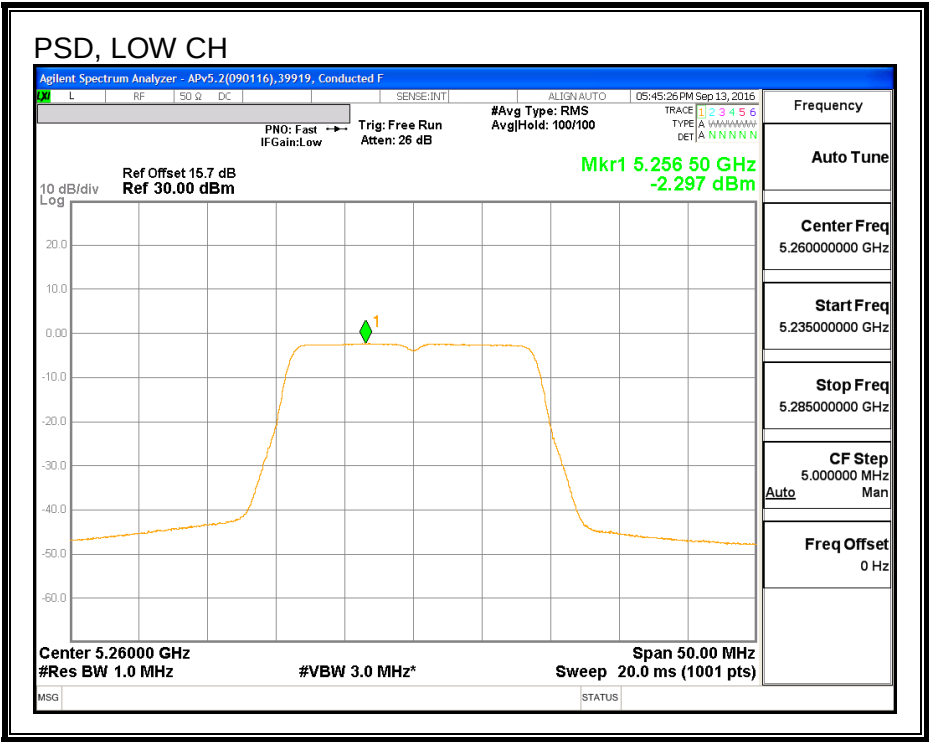

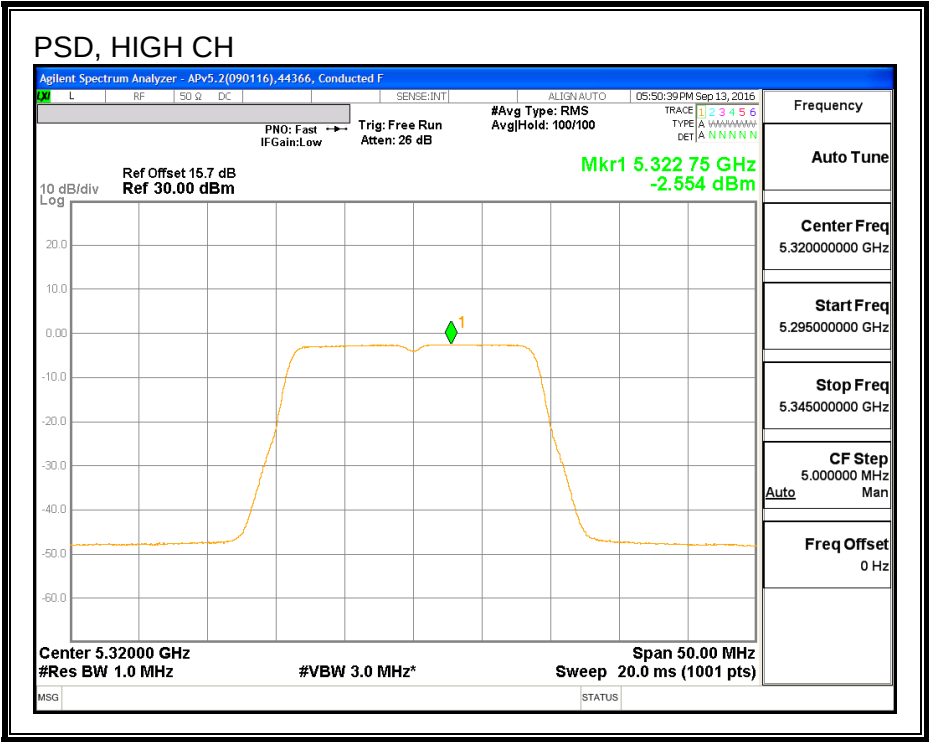

8.16. 802.11n HT40 CHAIN 0 MODE IN THE 5.3 GHz BAND



8.16.1. 26 dB BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5270	40.982
High	5310	40.920

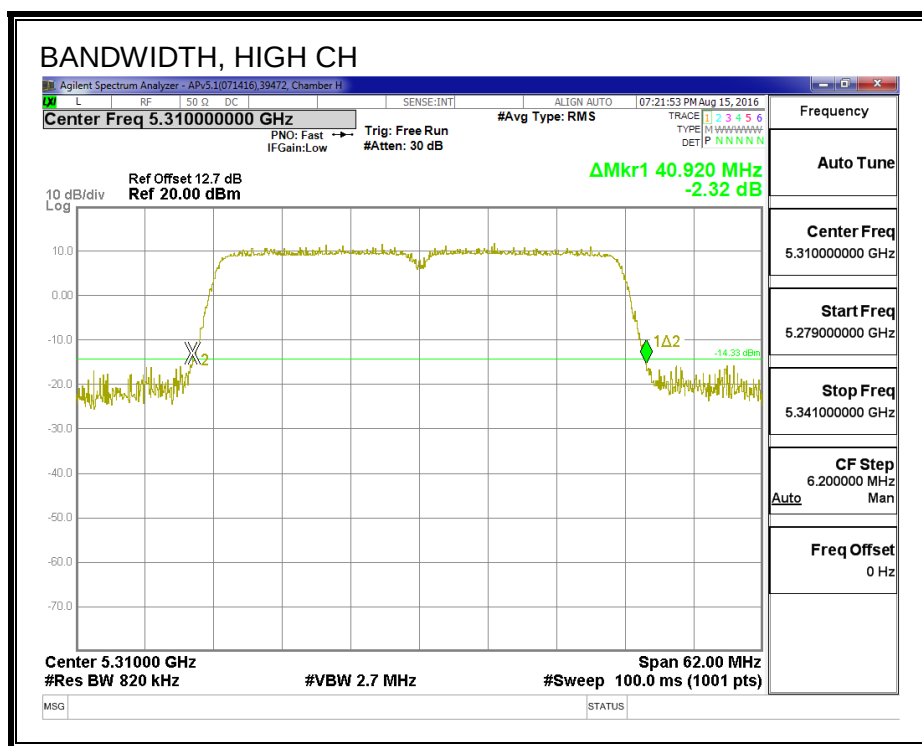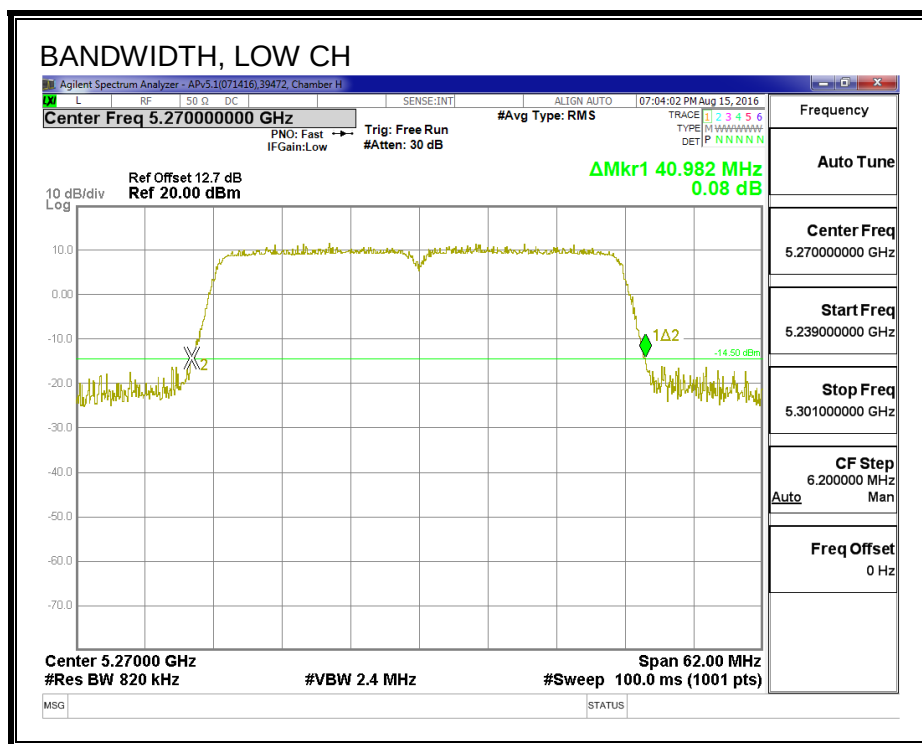

8.16.2. 99% BANDWIDTH



LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5270	36.400
High	5310	36.183

99% BANDWIDTH

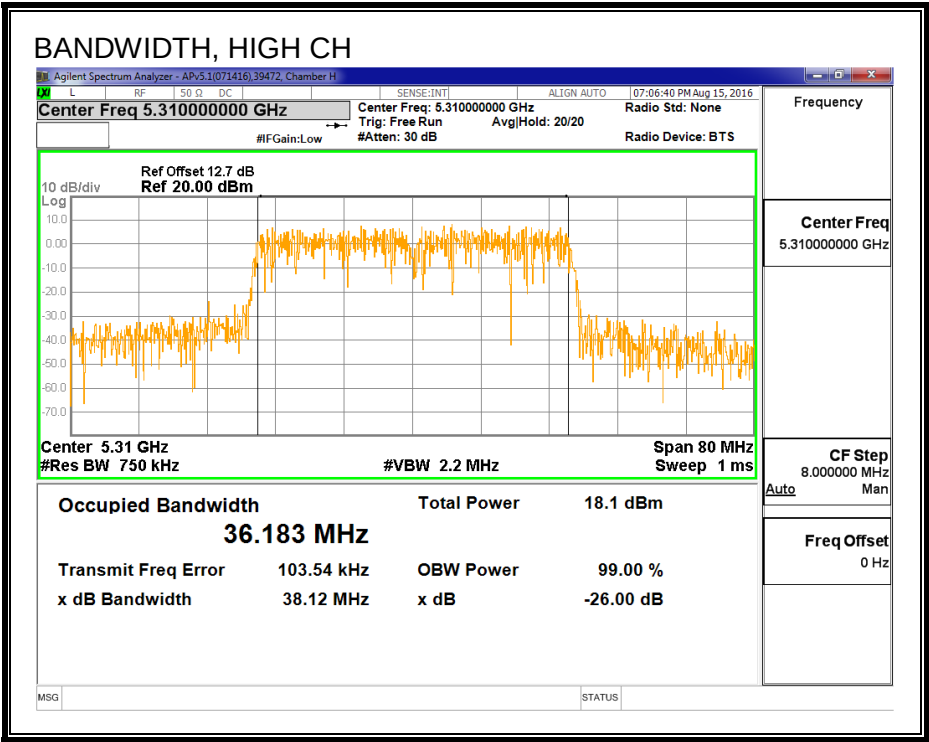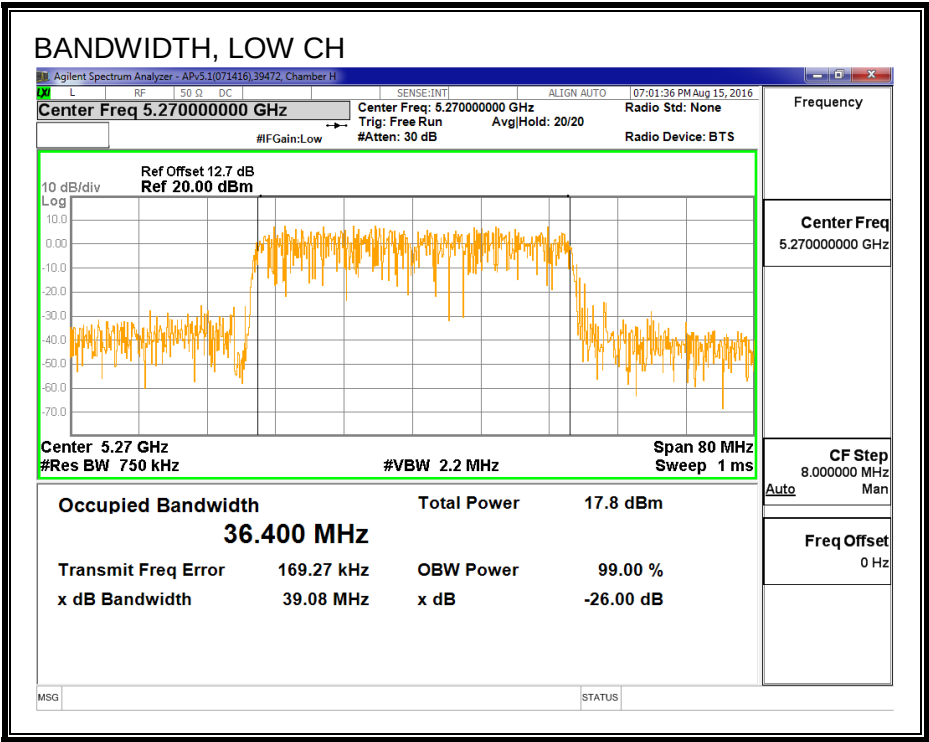

8.16.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	43573	Date:	9/7/16
------------	-------	--------------	--------

Channel	Frequency (MHz)	Power (dBm)
Low	5270	12.35
High	5310	12.40

8.16.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26–dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

IC RSS-247 (6.2.2) (1)

The maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10} B$, dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10} B$, dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

ID:	43573	Date:	9/7/16
------------	-------	--------------	--------

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5270	40.982	36.400	4.90	24.00	11.00
High	5310	40.920	36.183	4.90	24.00	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5270	12.35	12.35	24.00	-11.65
High	5310	12.40	12.40	24.00	-11.60

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5270	-1.978	-1.98	11.00	-12.98
High	5310	-2.323	-2.32	11.00	-13.32

PSD

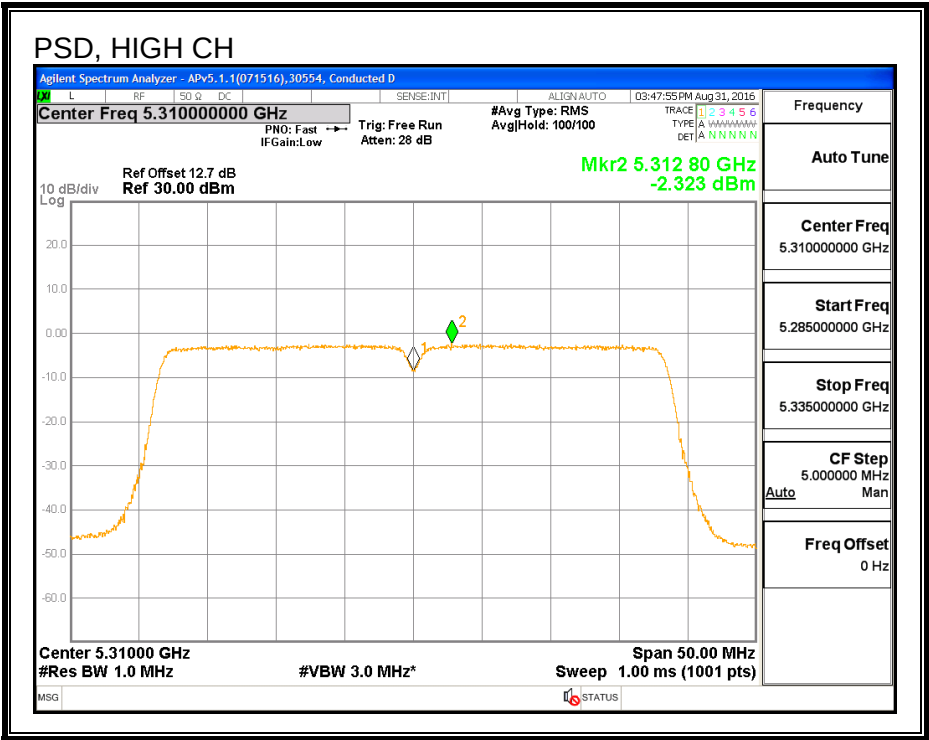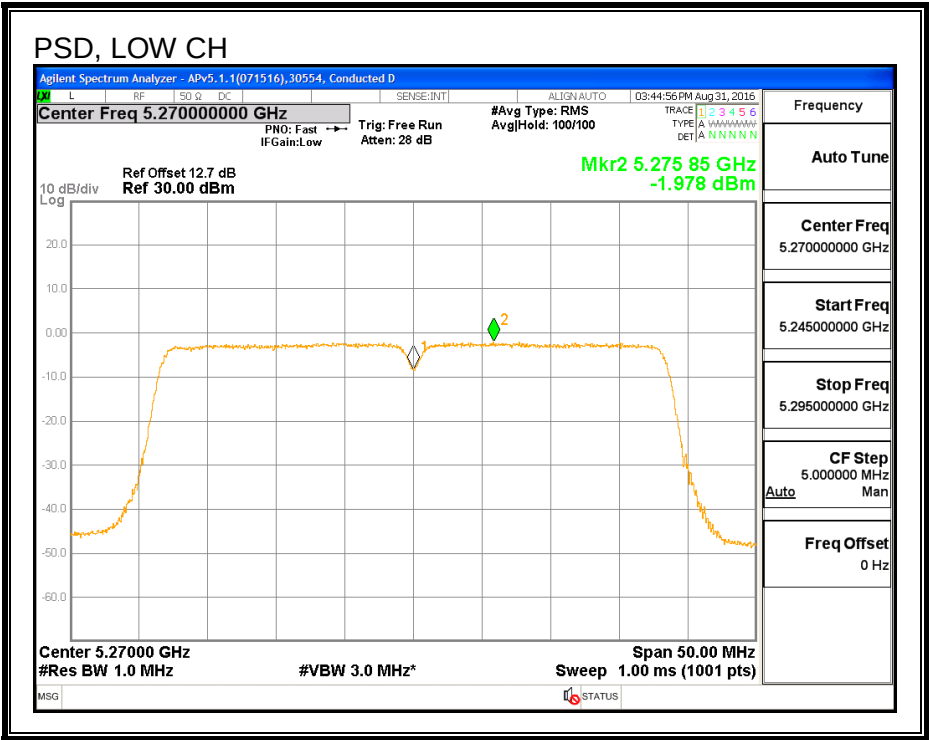

8.17. 802.11n HT40 CHAIN 1 MODE IN THE 5.3 GHz BAND

8.17.1. 26 dB BANDWIDTH



LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5270	40.504
High	5310	40.796

26 dB BANDWIDTH

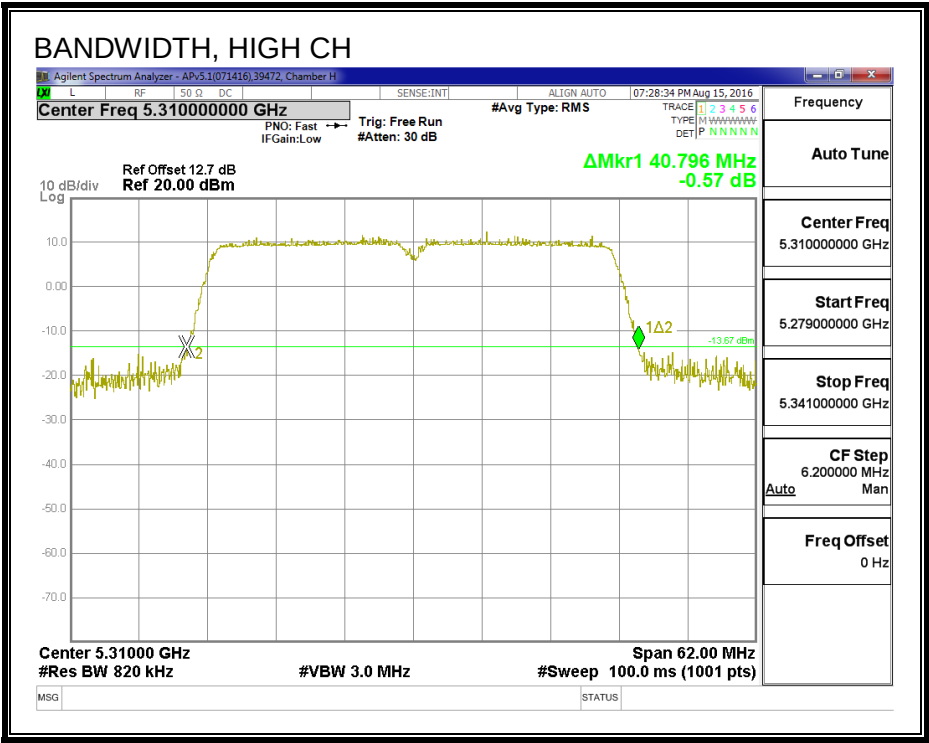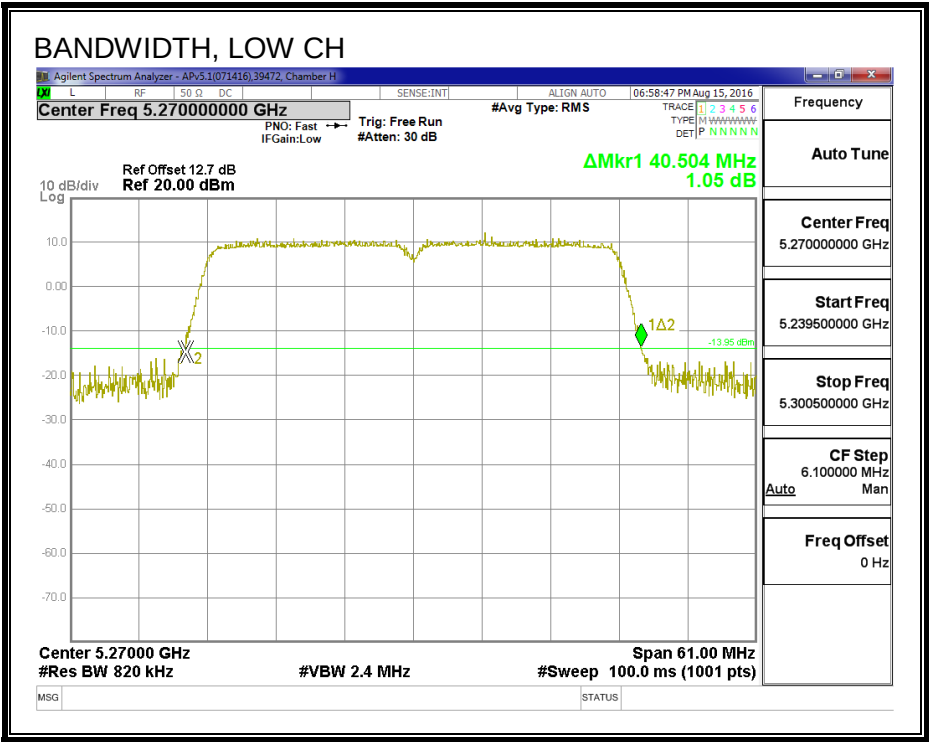

8.17.2. 99% BANDWIDTH



LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5270	36.329
High	5310	36.569

99% BANDWIDTH

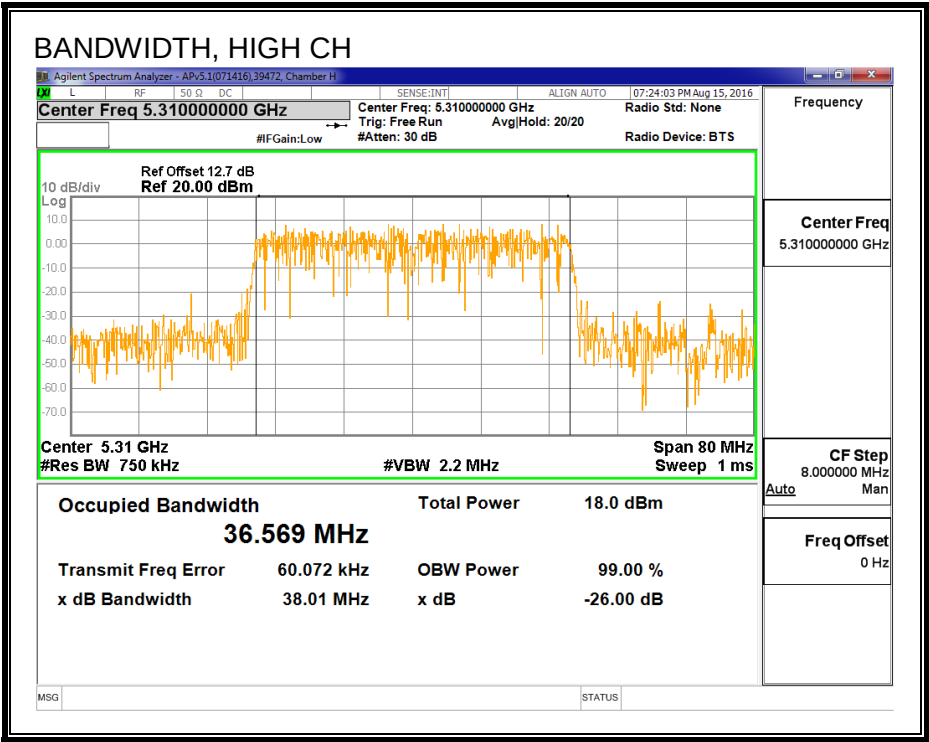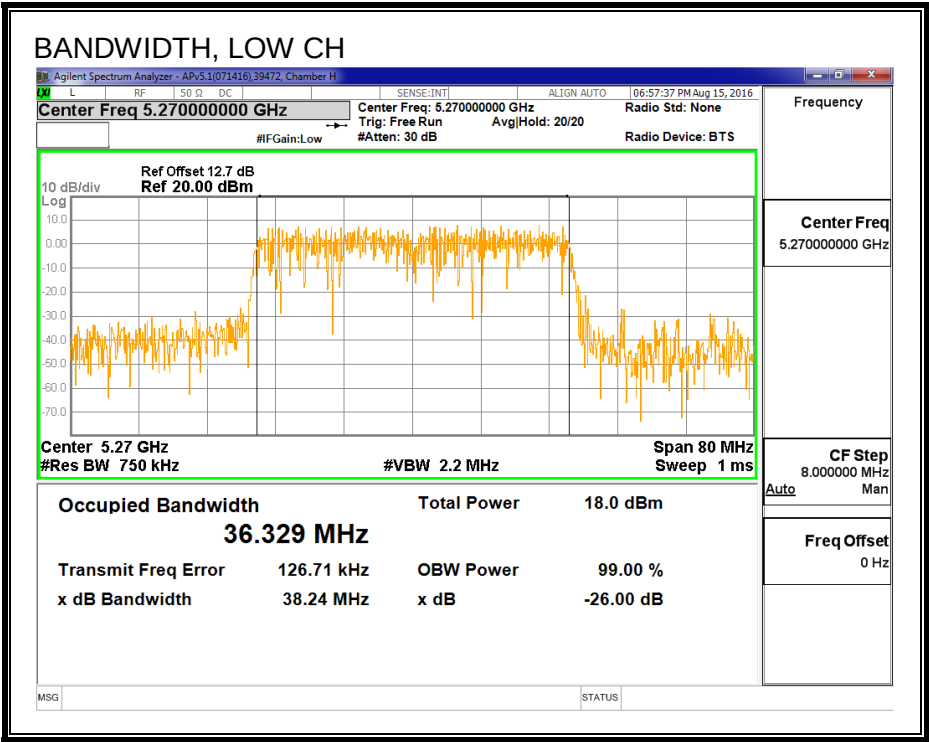

8.17.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	43573	Date:	9/7/16
------------	-------	--------------	--------

Channel	Frequency (MHz)	Power (dBm)
Low	5270	12.43
High	5310	12.47

8.17.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26–dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

IC RSS-247 (6.2.2) (1)

The maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10} B$, dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10} B$, dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

ID:	43573	Date:	9/7/16
------------	-------	--------------	--------

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5270	40.504	36.329	7.60	24.00	9.40
High	5310	40.796	36.569	7.60	24.00	9.40

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results

Channel	Frequency (MHz)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5270	12.43	12.43	24.00	-11.57
High	5310	12.47	12.47	24.00	-11.53

PSD Results

Channel	Frequency (MHz)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5270	-2.066	-2.07	9.40	-11.47
High	5310	-2.343	-2.34	9.40	-11.74

PSD

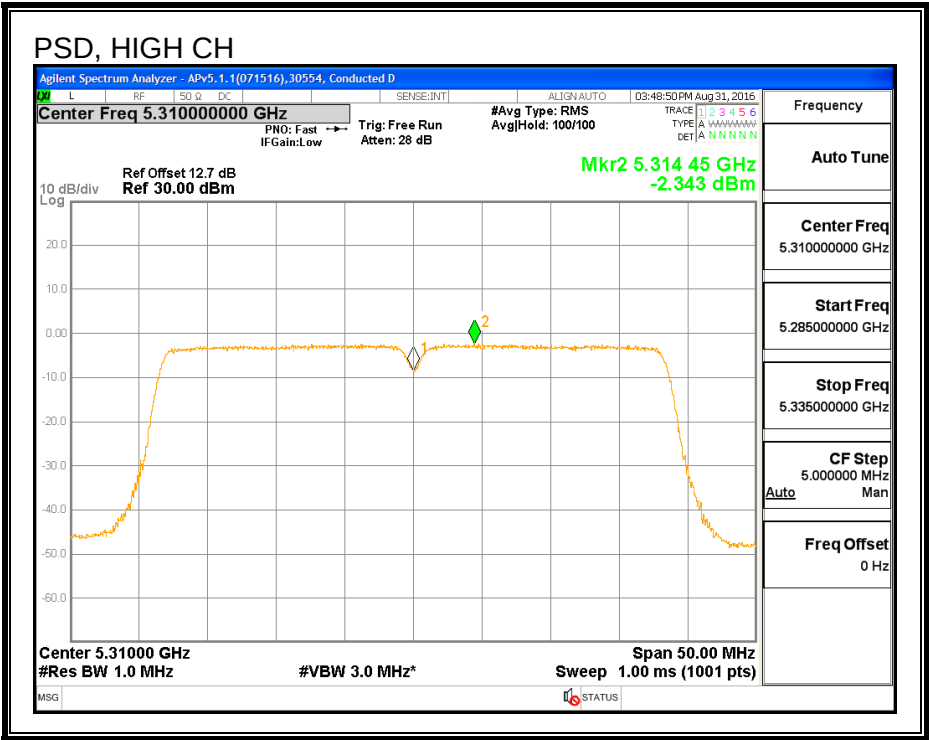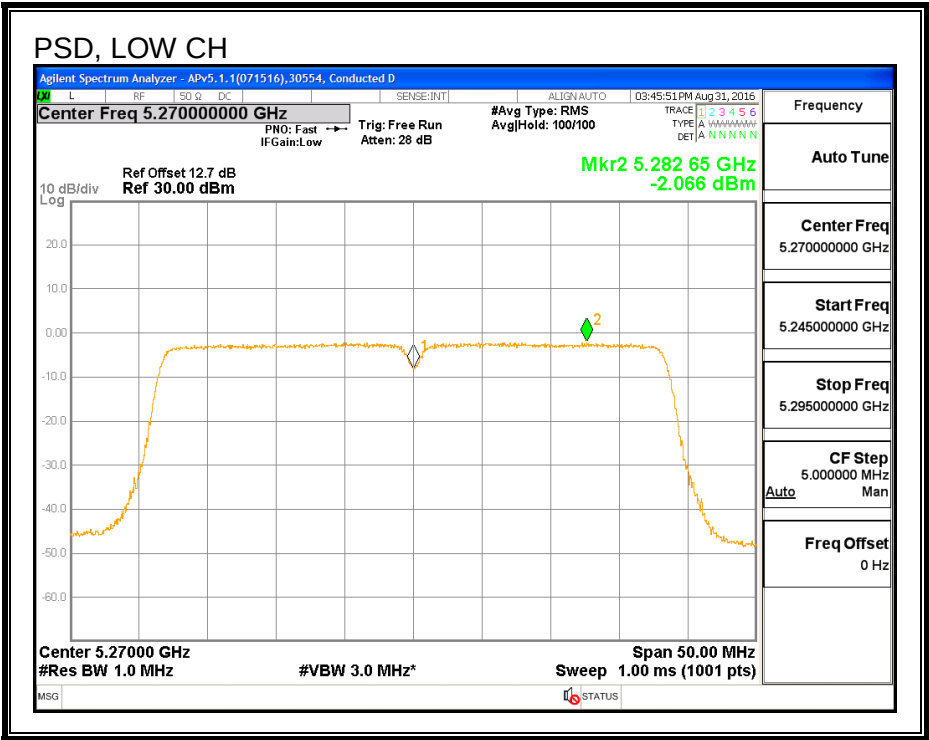

8.18. 802.11n HT40 CHAIN 2 MODE IN THE 5.3 GHz BAND

8.18.1. 26 dB BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5270	40.920
High	5310	41.230

26 dB BANDWIDTH

