



CERTIFICATION TEST REPORT

Report Number. : 16U23813-E3V3 DTS

Applicant : APPLE, INC.
1 INFINITE LOOP
CUPERTINO, CA 95014, U.S.A

Model : A1822

FCC ID : BCGA1822

IC : 579C-A1822

EUT Description : TABLET DEVICE

Test Standard(s) : FCC 47 CFR PART 15 SUBPART C
INDUSTRY CANADA RSS - 247 ISSUE 1

Date Of Issue:
February 10, 2017

Prepared by:
UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888



NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
V1	01/24/2017	Initial Issue	Mengistu Mekuria
V2	02/08/2017	Address TCB's Question	Chin Pang
V3	02/10/2017	Address TCB's Question	Chin Pang

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION	6
4. CALIBRATION AND UNCERTAINTY	6
4.1. MEASURING INSTRUMENT CALIBRATION	6
4.2. SAMPLE CALCULATION	6
4.3. MEASUREMENT UNCERTAINTY	7
5. EQUIPMENT UNDER TEST	8
5.1. DESCRIPTION OF EUT	8
5.2. MAXIMUM OUTPUT POWER.....	8
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	8
5.4. SOFTWARE AND FIRMWARE.....	8
5.5. WORST-CASE CONFIGURATION AND MODE.....	9
5.6. DESCRIPTION OF TEST SETUP.....	10
6. TEST AND MEASUREMENT EQUIPMENT	16
7. MEASUREMENT METHODS	17
8. ANTENNA PORT TEST RESULTS	18
8.1. 11b ANTENNA A SISO MODE IN THE 2.4GHz BAND	21
8.1.1. 6 dB BANDWIDTH.....	21
8.1.2. 99% BANDWIDTH.....	25
8.1.3. AVERAGE POWER	29
8.1.4. OUTPUT POWER	30
8.1.5. POWER SPECTRAL DENSITY	32
8.1.6. CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS.....	36
8.2. 11b ANTENNA B SISO MODE IN THE 2.4GHz BAND	42
8.2.1. 6 dB BANDWIDTH.....	42
8.2.2. 99% BANDWIDTH.....	46
8.2.3. AVERAGE POWER	50
8.2.4. OUTPUT POWER	51
8.2.5. POWER SPECTRAL DENSITY	53
8.2.6. CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS.....	57
8.3. 11n HT20 ANTENNA A SISO MODE IN THE 2.4GHz BAND	63
8.3.1. 6 dB BANDWIDTH.....	63
8.3.2. 99% BANDWIDTH.....	67
8.3.3. AVERAGE POWER	71
8.3.4. OUTPUT POWER	72

8.3.5.	POWER SPECTRAL DENSITY	74
8.3.6.	CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS.....	78
8.4.	<i>11n HT20 Antenna B SISO MODE IN THE 2.4GHz BAND</i>	<i>84</i>
8.4.1.	6 dB BANDWIDTH.....	84
8.4.2.	99% BANDWIDTH.....	88
8.4.3.	AVERAGE POWER.....	92
8.4.4.	OUTPUT POWER	93
8.4.5.	POWER SPECTRAL DENSITY	95
8.4.6.	CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS.....	99
8.5.	<i>11n HT20 2TX CDD MIMO MODE IN THE 2.4GHz BAND</i>	<i>105</i>
8.5.1.	6 dB BANDWIDTH.....	105
8.5.2.	99% BANDWIDTH.....	113
8.5.3.	AVERAGE POWER.....	121
8.5.4.	OUTPUT POWER	122
8.5.5.	POWER SPECTRAL DENSITY	124
8.5.6.	CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS.....	132
9.	RADIATED TEST RESULTS.....	143
9.1.	<i>LIMITS AND PROCEDURE</i>	<i>143</i>
9.2.	<i>TRANSMITTER ABOVE 1 GHz.....</i>	<i>144</i>
9.2.1.	11b Antenna A SISO MODE IN THE 2.4GHz BAND.....	144
9.2.2.	11b Antenna B SISO MODE IN THE 2.4GHz BAND.....	158
9.2.3.	11n HT20 Antenna A SISO MODE IN THE 2.4GHz BAND	172
9.2.4.	11n HT20 Antenna B SISO MODE IN THE 2.4GHz BAND	188
9.2.5.	11n HT20 2TX CDD MIMO MODE IN THE 2.4GHz BAND	204
9.3.	<i>WORST-CASE BELOW 1 GHz.....</i>	<i>222</i>
9.4.	<i>WORST-CASE 18 to 26 GHz.....</i>	<i>224</i>
10.	AC POWER LINE CONDUCTED EMISSIONS	226
10.1.	<i>EUT POWERED BY AC/DC ADAPTER VIA USB CABLE.....</i>	<i>227</i>
10.2.	<i>EUT POWERED BY HOST PC VIA USB CABLE.....</i>	<i>229</i>
11.	SETUP PHOTOS	231

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: APPLE, INC.
1 INFINITE LOOP
CUPERTINO, CA 95014, U.S.A.

EUT DESCRIPTION: TABLET DEVICE

MODEL: A1822

SERIAL NUMBER: CONDUCTED (F9FSQ02CHQNX), RADIATED (F9FSJ00HHN9P)


DATE TESTED: NOVEMBER 15, 2016 – FEBRUARY 08, 2017

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass
INDUSTRY CANADA RSS-247 Issue 1	Pass
INDUSTRY CANADA RSS-GEN Issue 4	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:



MENGISTU MEKURIA
SENIOR ENGINEER
UL VERIFICATION SERVICES INC.

Prepared By:



TONY LI
LAB ENGINEER
UL VERIFICATION SERVICES INC.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, KDB 558074 D01 v03r05, ANSI C63.10-2013, RSS-GEN Issue 4, and RSS-247 Issue 1.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
☐ Chamber A (IC:2324B-1)	☒ Chamber D (IC:2324B-4)
☐ Chamber B (IC:2324B-2)	☐ Chamber E (IC:2324B-5)
☐ Chamber C (IC:2324B-3)	☐ Chamber F (IC:2324B-6)
	☒ Chamber G (IC:2324B-7)
	☐ Chamber H (IC:2324B-8)

The above test sites and facilities are covered under FCC Test Firm Registration # 208313.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned}\text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m}\end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Parameter	Uncertainty
Worst Case Conducted Disturbance, 9KHz to 0.15 MHz	3.84 dB
Worst Case Conducted Disturbance, 0.15 to 30 MHz	3.65 dB
Worst Case Radiated Disturbance, 9KHz to 30 MHz	3.15 dB
Worst Case Radiated Disturbance, 30 to 1000 MHz	5.36 dB
Worst Case Radiated Disturbance, 1000 to 18000 MHz	4.32 dB
Worst Case Radiated Disturbance, 18000 to 26000 MHz	4.45 dB
Worst Case Radiated Disturbance, 26000 to 40000 MHz	5.24 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a tablet with multimedia functions (music, application support, and video), IEEE 802.11a/b/g/n/ac radio, and Bluetooth radio. The rechargeable battery is not user accessible.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum conducted peak output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2412 - 2472	802.11b 1TX	19.17	82.60
	802.11g 1TX	Covered by HT20 1TX	
	802.11g 2TX	Covered by HT20 2TX CDD	
	802.11n HT20 1TX	22.70	186.21
	802.11n HT20 2TX CDD	25.73	374.11

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

Frequency Band (GHz)	Antenna Gain (dBi)	
	Antenna A	Antenna B
2.4	1.91	0.56

5.4. SOFTWARE AND FIRMWARE

The firmware installed in the EUT during testing was 14E232.

5.5. WORST-CASE CONFIGURATION AND MODE

For below 1G, 18-26GHz radiated emission, and power line conducted emissions were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

For g and HT20 modes, radiated harmonics spurious and power line conducted emissions were performed with the EUT set at the CDD mode at highest power setting among the CDD/STBC/SDM modes as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X/Y/Z, it was determined that Y-Landscape orientation was worst-case orientation. Therefore, all final radiated testing was performed with the EUT in Y-Landscape orientation.

Worst-case data rates as provided by the client were:

802.11b mode: 1 Mbps
802.11g mode: 6 Mbps
802.11n HT20mode: MCS0

The following modes have the same target power and use the same modulation (OFDM). Therefore, 802.11g 1TX and 802.11g 2TX are covered by 802.11n HT20 1TX and 802.11n HT20 2TX CDD respectively.

- 802.11g and 802.11n HT20 1TX
- 802.11g 2TX and 802.11n HT20 2TX CDD

There are two vendors of the WiFi/Bluetooth radio modules: variant 1 and variant 2. The Wi-Fi/Bluetooth radio modules have the same mechanical outline (e.g., the same package dimension and pin-out layout), use the same on-board antenna matching circuit, have an identical antenna structure, and are built and tested to conform to the same specifications and to operate within the same tolerances.

Baseline testing was performed on the two variants to determine the worst case on all conducted power and radiated emissions.

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop	Apple	A1286	7313700NAGW	N/A
Laptop AC/DC adapter	Apple	A1343	C062172045DDJ94A6	N/A
Earphone	Apple	NA	NA	N/A
EUT AC/DC adapter	Apple	A1357	W010A051	N/A

I/O CABLES (CONDUCTED TEST)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	Antenna	1	SMA	Un-Shielded	0.2	To spectrum Analyzer
2	USB	1	USB	Shielded	1	N/A
3	AC	1	AC	Un-shielded	3	N/A

I/O CABLES (RADIATED ABOVE 1 GHZ)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
None Used						

I/O CABLES (RADIATED BELOW 1 GHZ AND AC LINE CONDUCTED: AC/DC ADAPTER CONFIGURATION)

I/O Cable List						
Cable No	Port	# of identical	Connector Type	Cable Type	Cable Length (m)	Remarks
1	Earphone Jack	1	3.5mm Audio	Shielded	0.9	N/A
2	USB	1	USB	shielded	1	N/A


I/O CABLES (AC LINE CONDUCTED: LAPTOP CONFIGUARTION)

I/O Cable List						
Cable No	Port	# of identical	Connector Type	Cable Type	Cable Length (m)	Remarks
1	Earphone Jack	1	3.5mm Audio	Shielded	0.9	N/A
2	USB	1	USB	Shielded	1	N/A
3	AC	1	AC	Un-shielded	1.2	N/A

TEST SETUP - CONDUCTED TESTS

The EUT was connected to a host Laptop via USB cable adapter and spectrum analyzer to antenna port. Test software exercised the EUT.


SETUP DIAGRAM

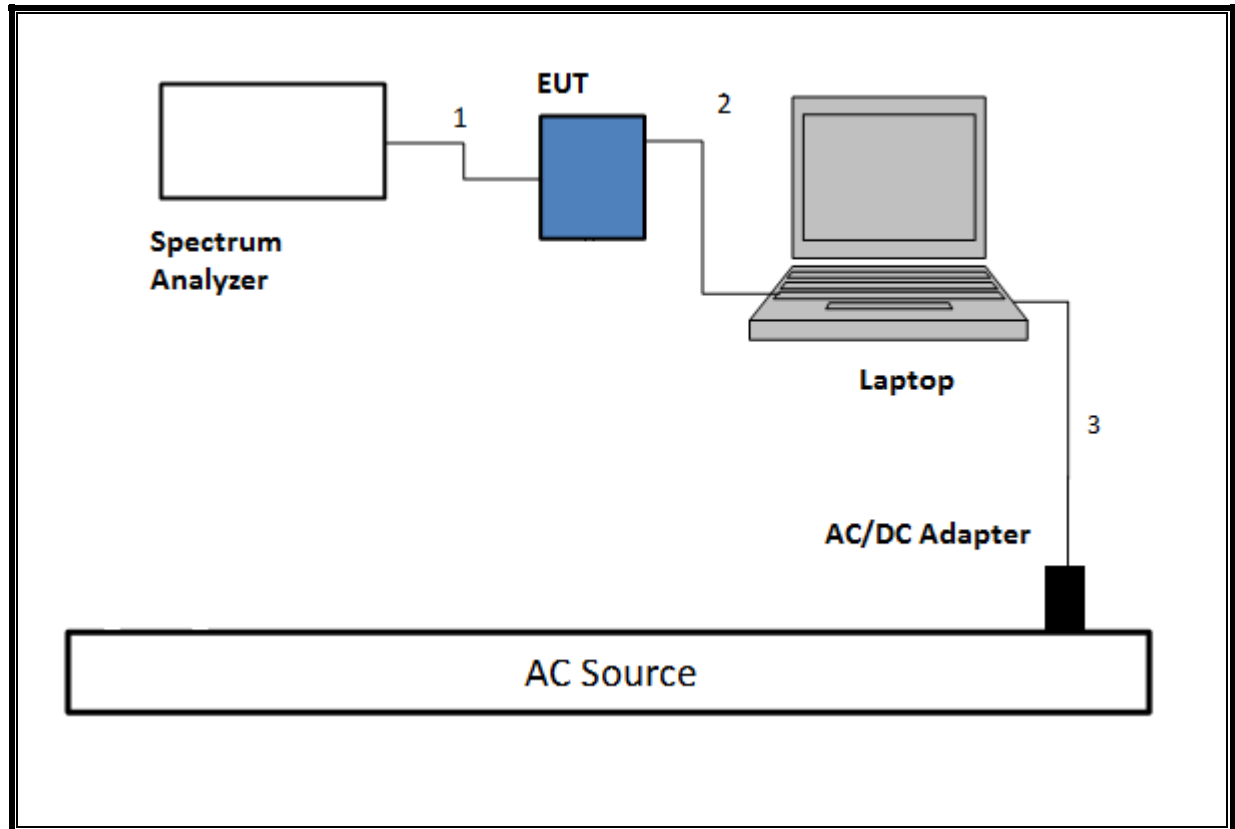

TEST SETUP- RADIATED-ABOVE 1 GHZ

The EUT was powered by battery. Test software exercised the EUT.


SETUP DIAGRAM

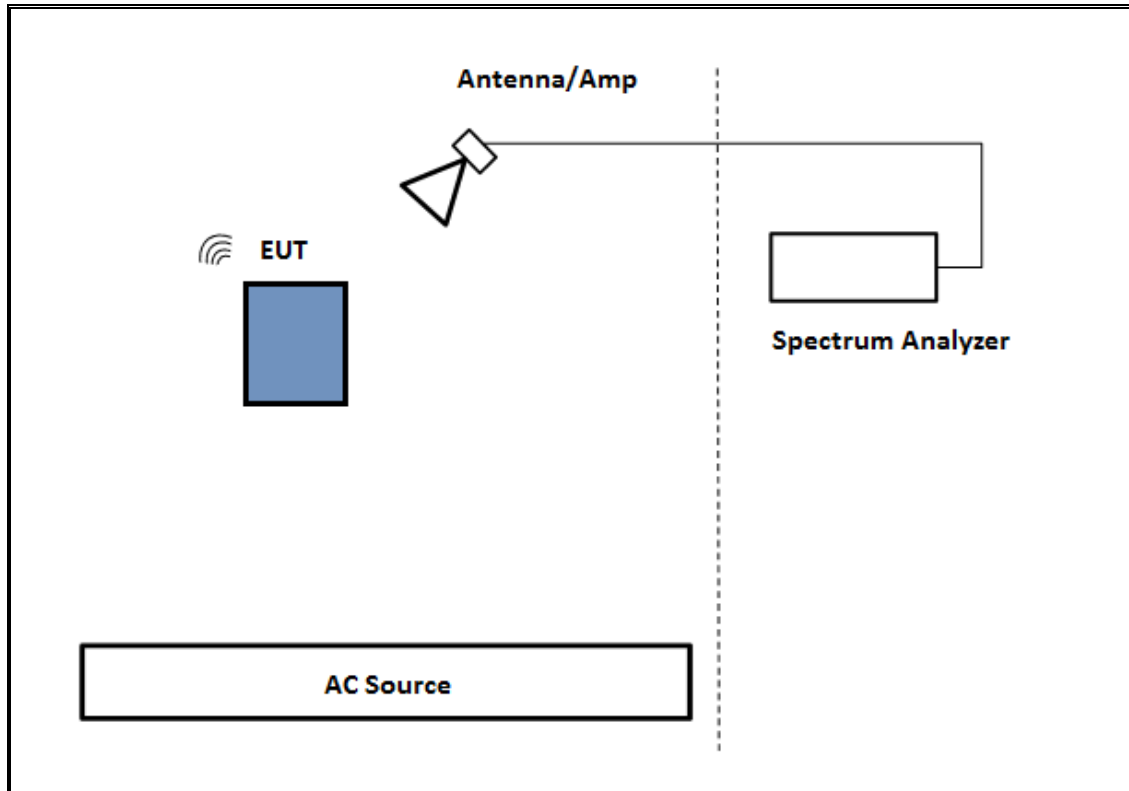

TEST SETUP- BELOW 1GHz

The EUT was powered by AC/DC adapter and connected with earphone. Test software exercised the EUT.


SETUP DIAGRAM

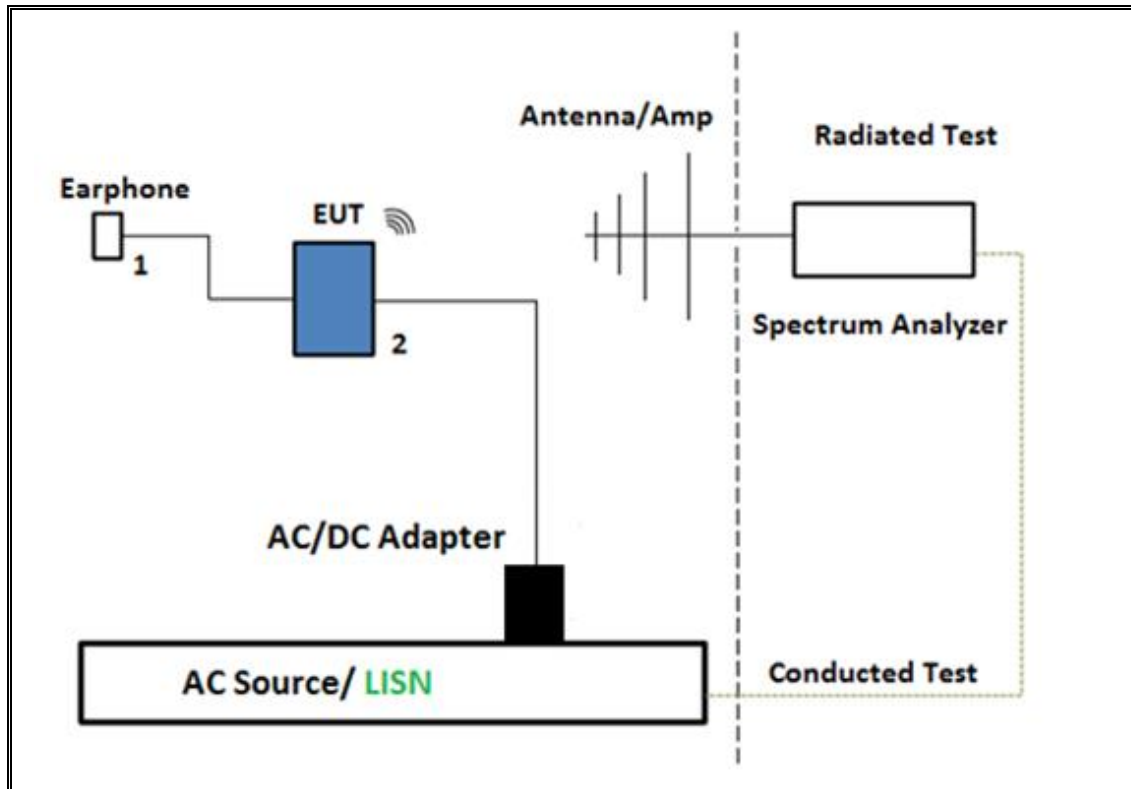

TEST SETUP- AC LINE CONDUCTED: AC/DC ADAPTER CONFIGURATION

The EUT was tested with earphone connected and powered by AC/DC adapter via USB cable. Test software exercised the EUT.


SETUP DIAGRAM

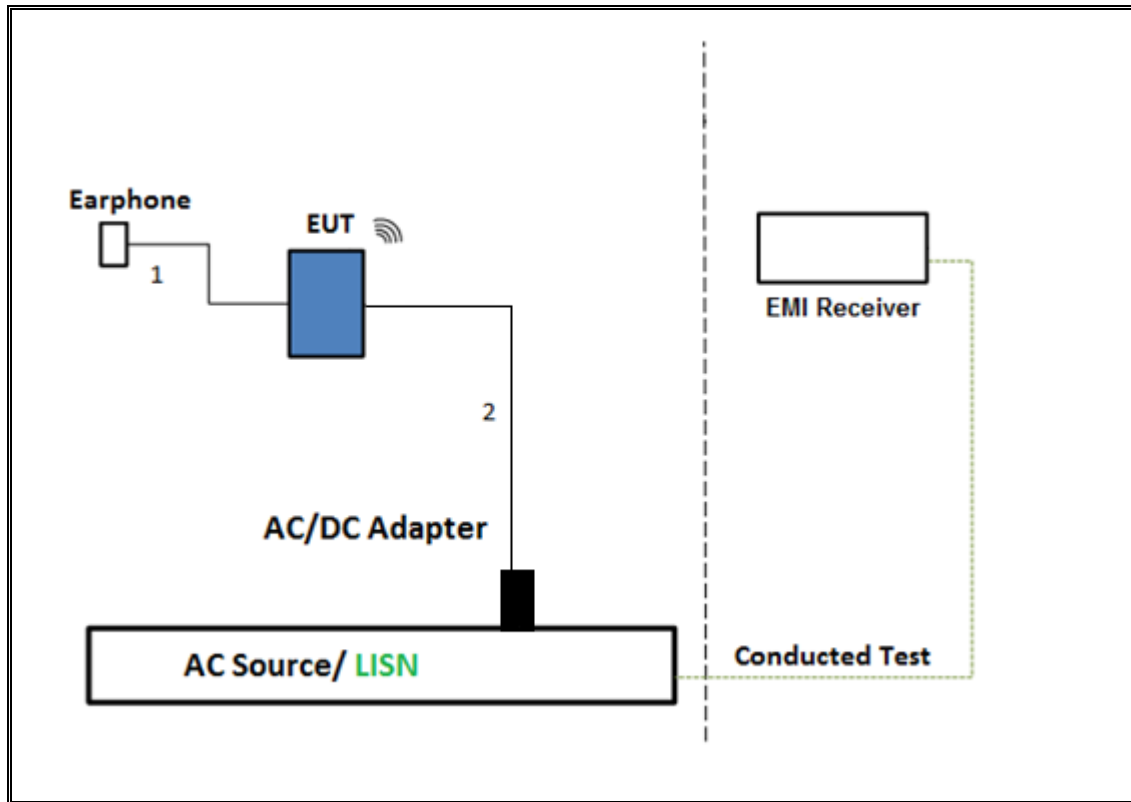

TEST SETUP- AC LINE CONDUCTED: LAPTOP CONFIGURATION

The EUT was tested with earphone connected and powered by host PC via USB cable. Test software exercised the EUT.

SETUP DIAGRAM

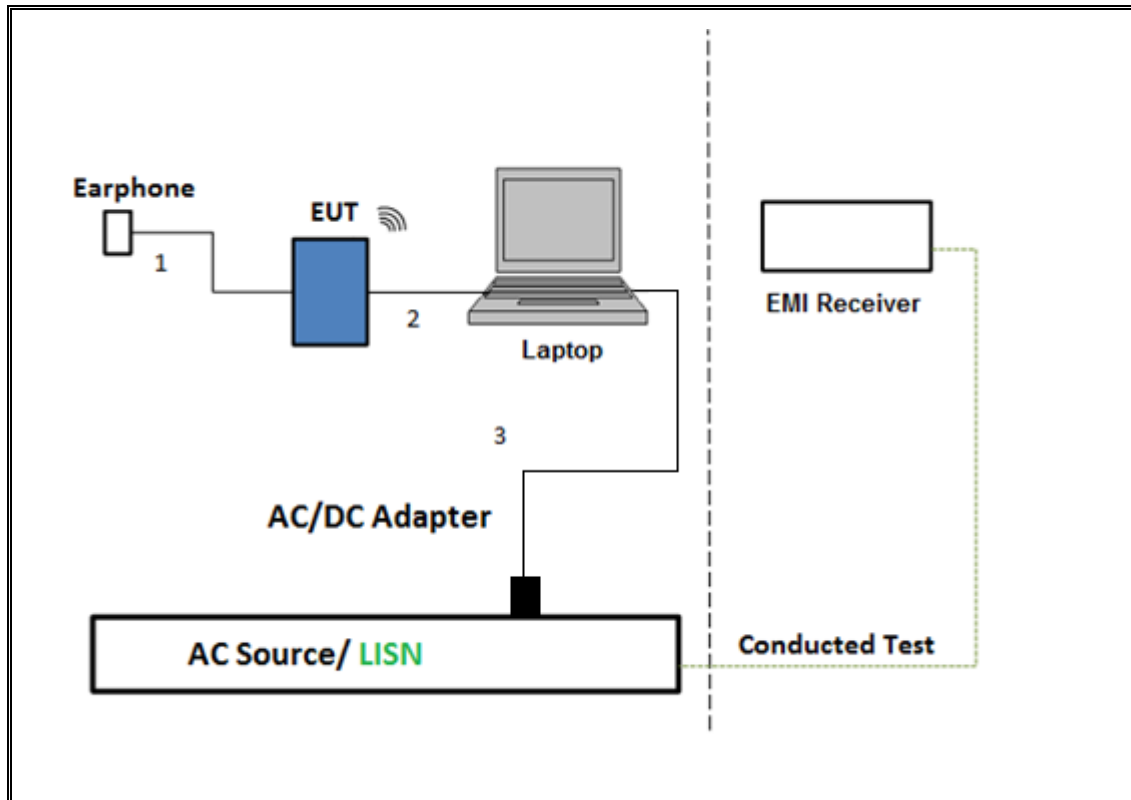

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Antenna, Horn 1-18GHz	ETS Lindgren	3117	T344	02/22/2017
Antenna, Broadband Hybrid, 30MHz to 2000MHz	Sunol Sciences	JB3	T407	04/04/2017
Amplifier, 10KHz to 1GHz, 32dB	Sonoma	310N	T286	05/04/2017
Amplifier, 1 to 18GHz	Miteq	AFS42-00101800-25-S-42	T740	11/29/2017
Spectrum Analyzer, PXA 3Hz to 44GHz	Keysight	N9030A	T340	12/14/2017
Antenna, Broadband Hybrid, 30MHz to 2000MHz	Sunol Sciences	JB3	T899	05/26/2017
Amplifier, 10KHz to 1GHz, 32dB	Sonoma	310N	T834	06/17/2017
Spectrum Analyzer, PXA 3Hz to 44GHz	Keysight	N9030A-544	T1210	06/30/2017
Power Sensor, P - series, 50MHz to 18GHz, Wideband	Agilent	N1921A	T1228	06/20/2017
Power Meter, P-series single channel	Keysight	N1912A	T1273	07/08/2017
Spectrum Analyzer, PXA, 3Hz to 44GHz	Keysight	N9030A	T905	06/21/2017
Spectrum Analyzer, PSA, 3Hz to 44GHz	Keysight	E4446A	T123	10/20/2017
Spectrum Analyzer, PXA, 3Hz to 44GHz	Keysight	N9030A	T339	09/22/2017
Spectrum Analyzer	Keysight	8564E	T106	09/07/2017
Antenna, Horn 18 to 26.5GHz	ARA	MWH-1826/B	T447	06/16/2017
Amplifier, 1 to 26.5GHz, 23.5dB Gain minimum	Keysight	8449B	T402	07/05/2017
AC Line Conducted				
*EMI Test Receiver 9KHz-7GHz	Rohde & Schwarz	ESCI7	T1436	12/19/2016
LISN for Conducted Emissions CISPR-16	Fischer	50/250-25-2-01	T1310	06/08/2017
UL AUTOMATION SOFTWARE				
Radiated Software	UL	UL EMC	Ver 9.5, April 26, 2016	
Conducted Software	UL	UL EMC	Ver 5.4, October 13, 2016	
AC Line Conducted Software	UL	UL EMC	Ver 9.5, May 26, 2015	

NOTE: *testing is completed before equipment calibration expiration date.

7. MEASUREMENT METHODS

6 dB BW: KDB 558074 D01 v03r05, Section 8.1.

Output Power: KDB 558074 D01 v03r05, Section 9.1.2.

Power Spectral Density: KDB 558074 D01 v03r05, Section 10.2.

Out-of-band emissions in non-restricted bands: KDB 558074 D01 v03r05, Section 11.0.

Out-of-band emissions in restricted bands: KDB 558074 D01 v03r05, Section 12.1.

Band-edge: KDB 558074 D01 v03r05, Section 12.1.

8. ANTENNA PORT TEST RESULTS

ON TIME AND DUTY CYCLE

LIMITS

None; for reporting purposes only.



PROCEDURE


KDB 558074 Zero-Span Spectrum Analyzer Method.

ON TIME AND DUTY CYCLE RESULTS

Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/B Minimum VBW (khz)
11b 2.4GHz 1TX	1	1	1	100%	0	0.01
11n HT20 2.4GHz 1TX	1.920	1.940	0.990	98.97%	0	0.01
11n HT20 2.4GHz CDD	1.920	1.945	0.987	98.71%	0	0.01

DUTY CYCLE PLOTS

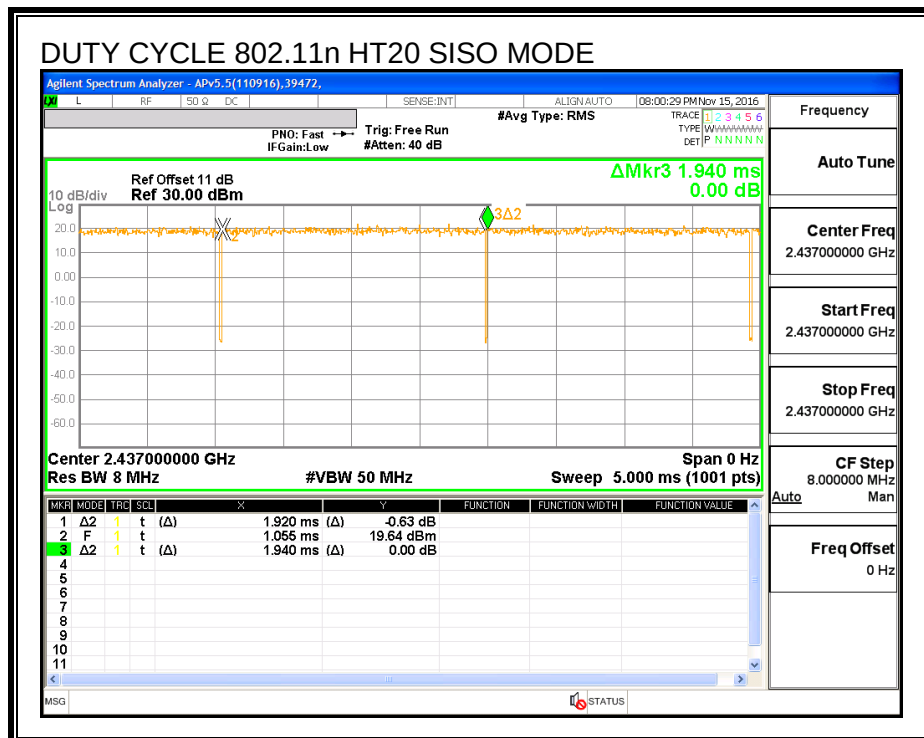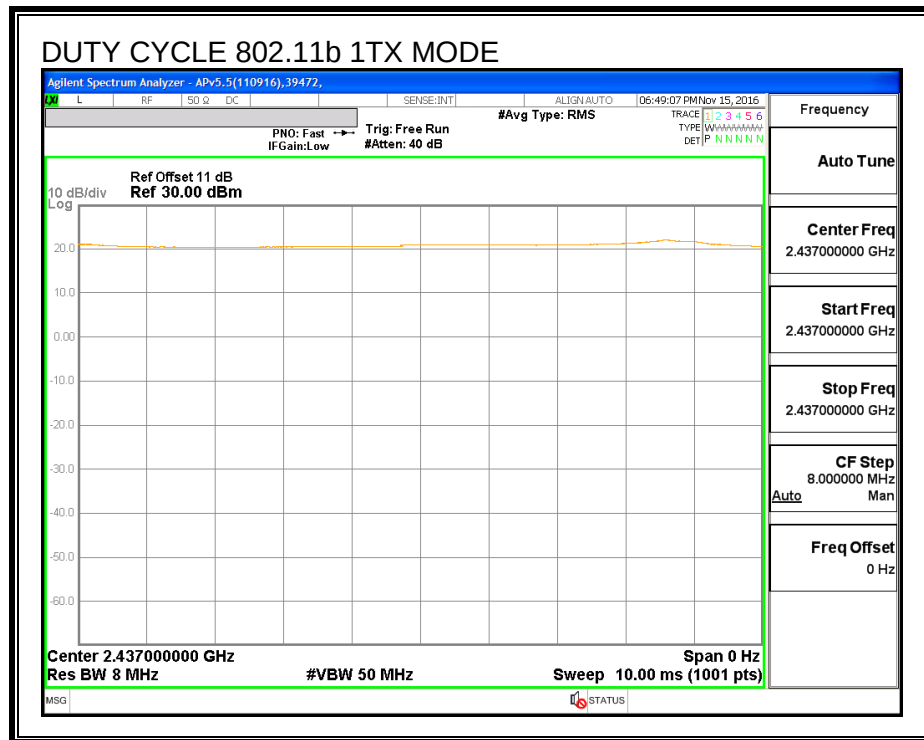

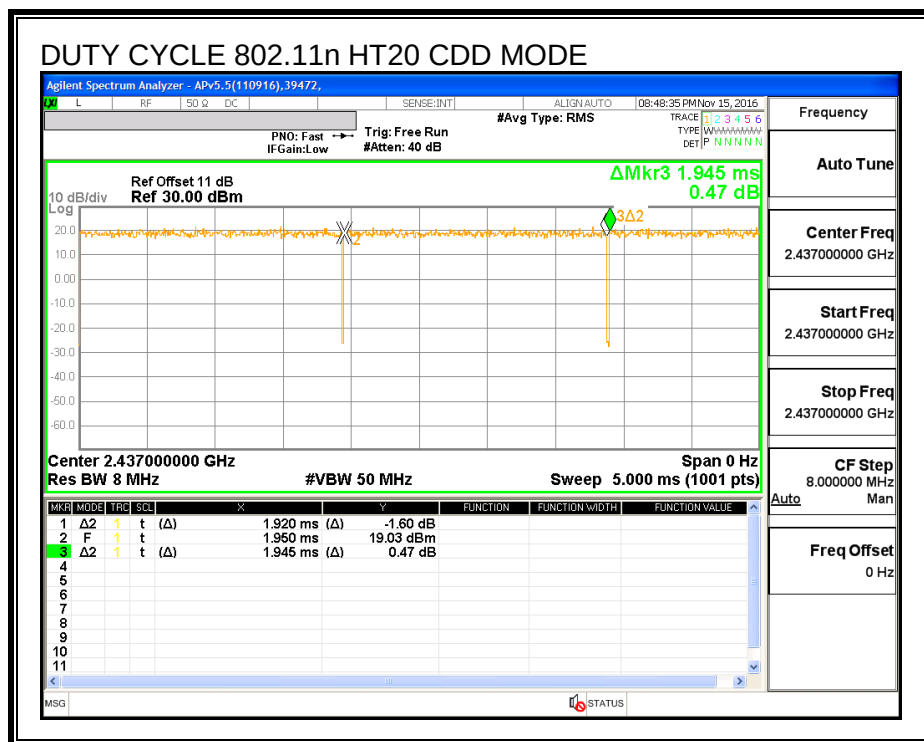

8.1. 11b ANTENNA A SISO MODE IN THE 2.4GHz BAND

8.1.1. 6 dB BANDWIDTH

LIMITS



FCC §15.247 (a) (2)



IC RSS-247 (5.2) (1)


The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS

Channel	Frequency (MHz)	6 dB BW Antenna A(MHz)	Minimum Limit (MHz)
Low_1	2412	8.090	0.5
Middle_6	2437	8.030	0.5
High_11	2462	7.645	0.5
High_12	2467	8.575	0.5
High_13	2472	8.105	0.5

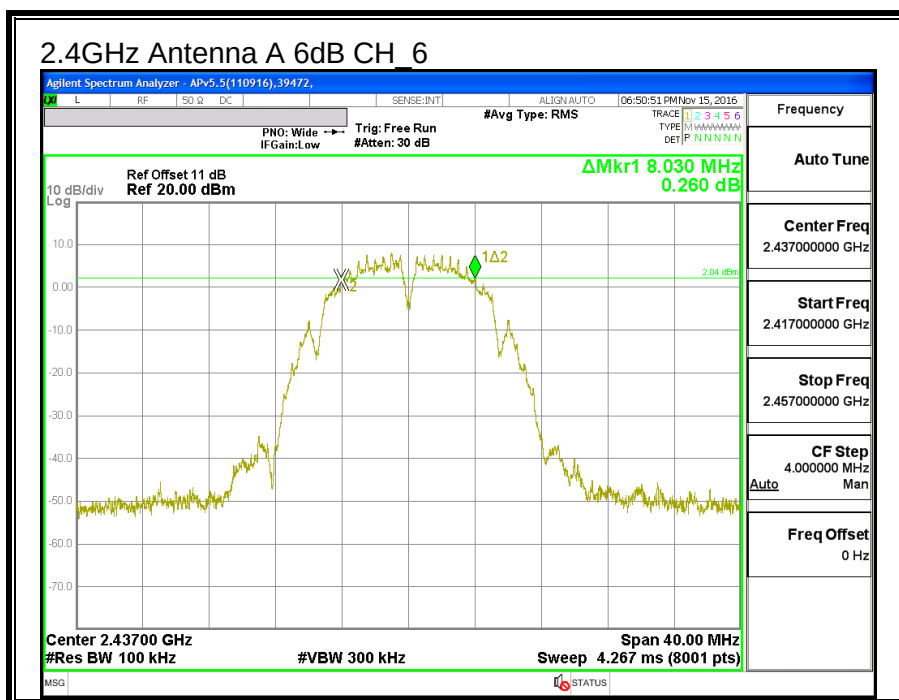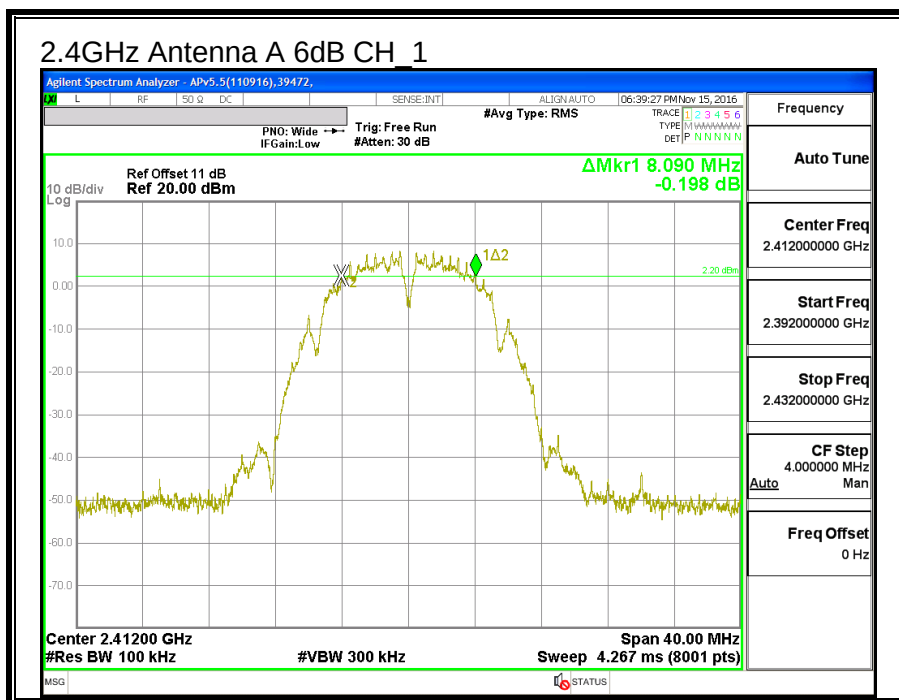

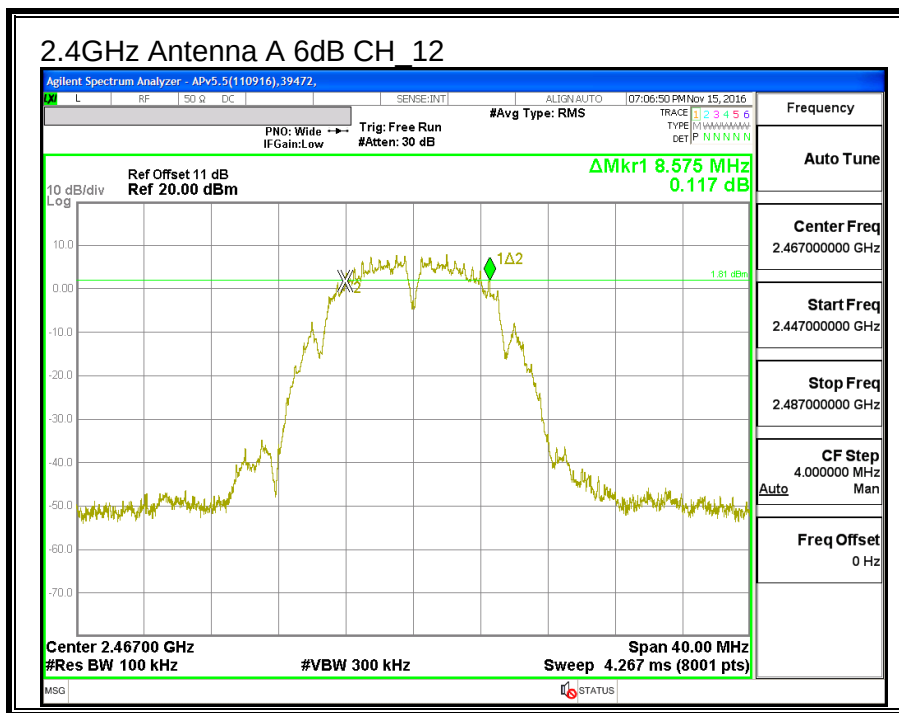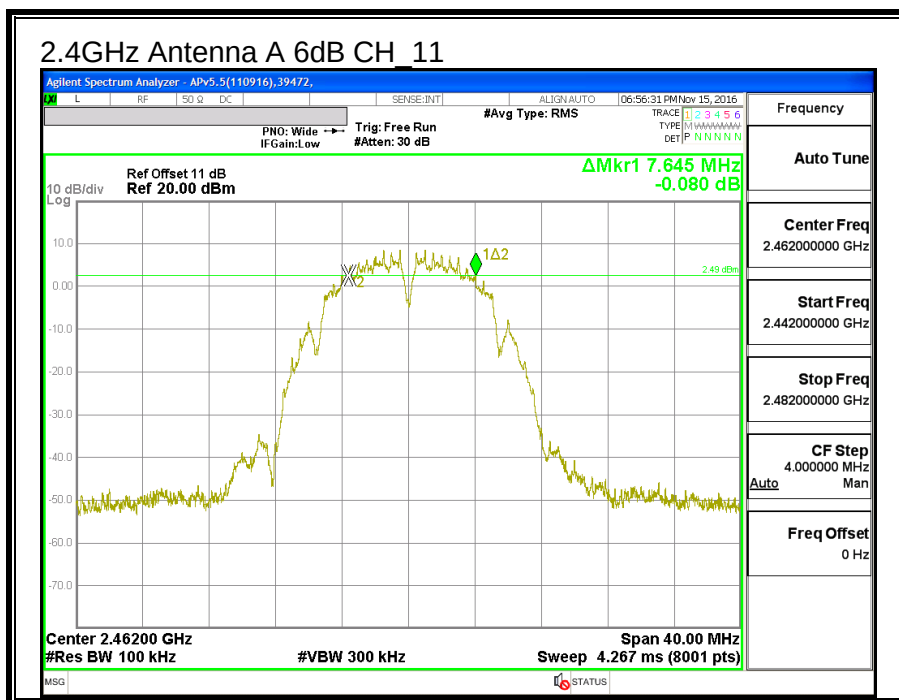

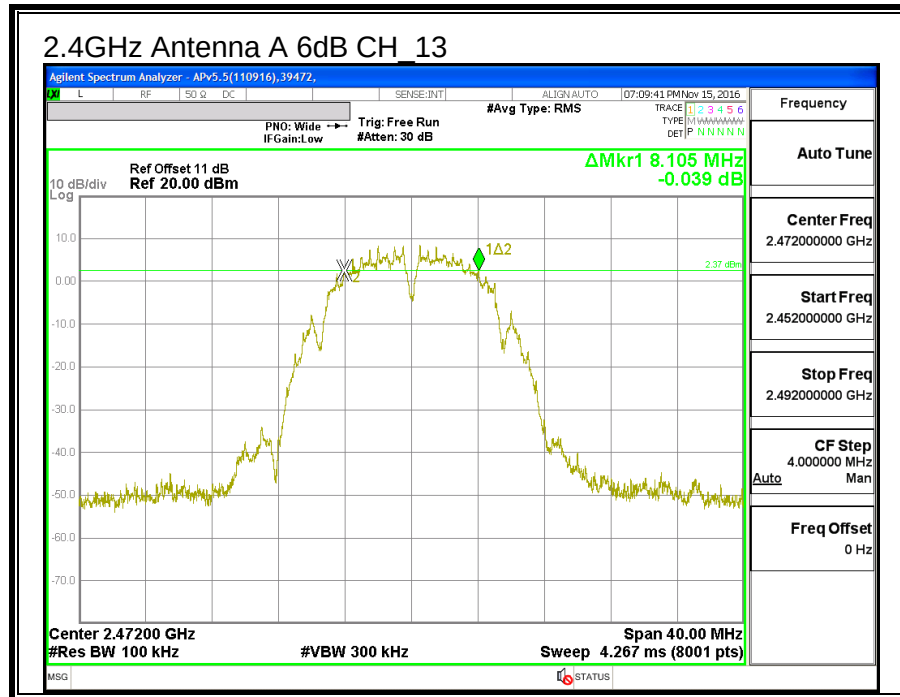



8.1.2. 99% BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth Antenna A (MHz)
Low_1	2412	10.303
Middle_6	2437	10.069
High_11	2462	10.396
High_12	2467	10.314
High_13	2472	10.291

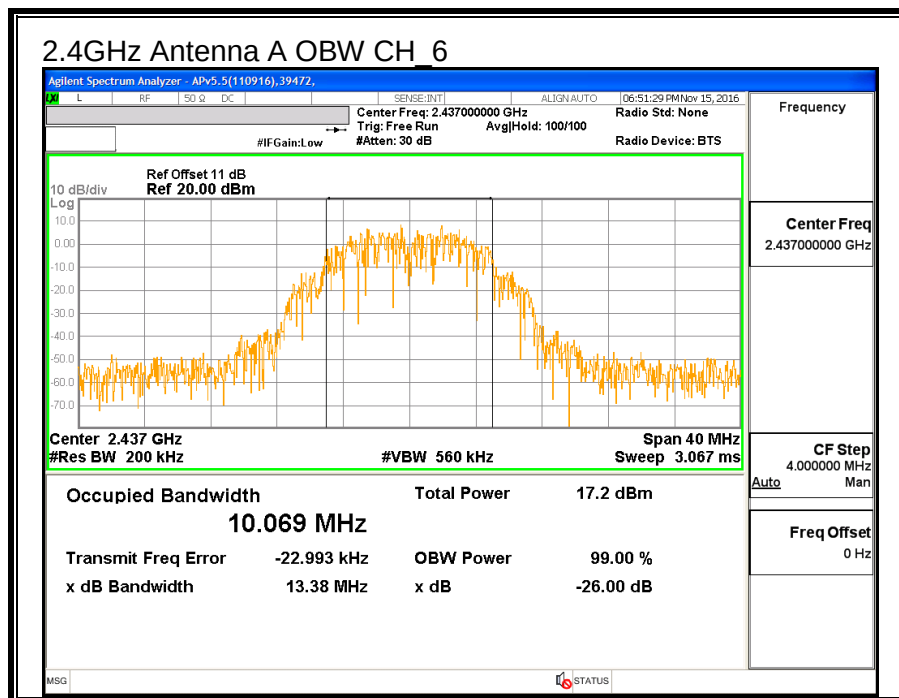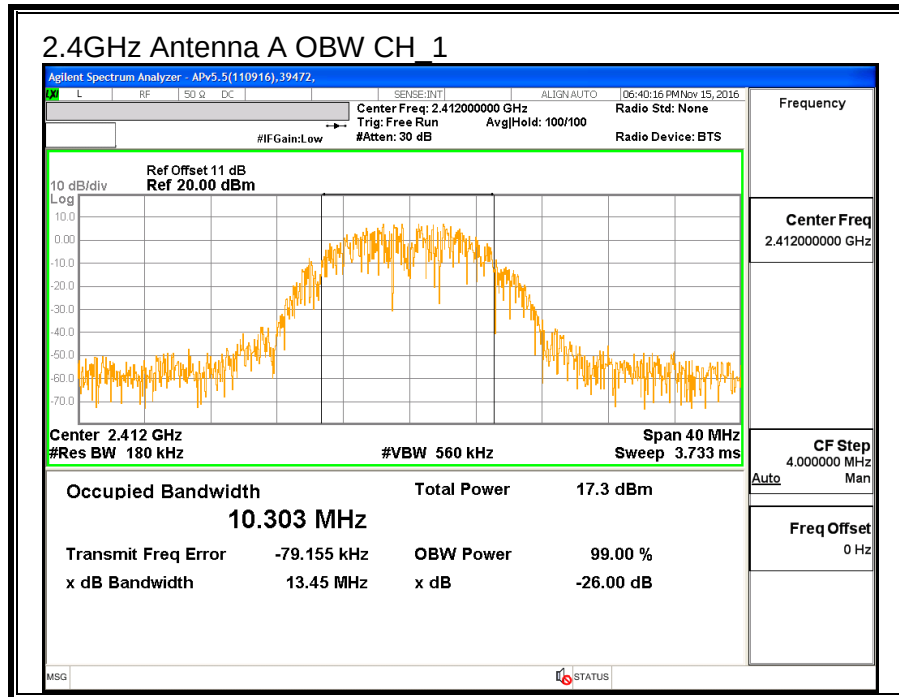

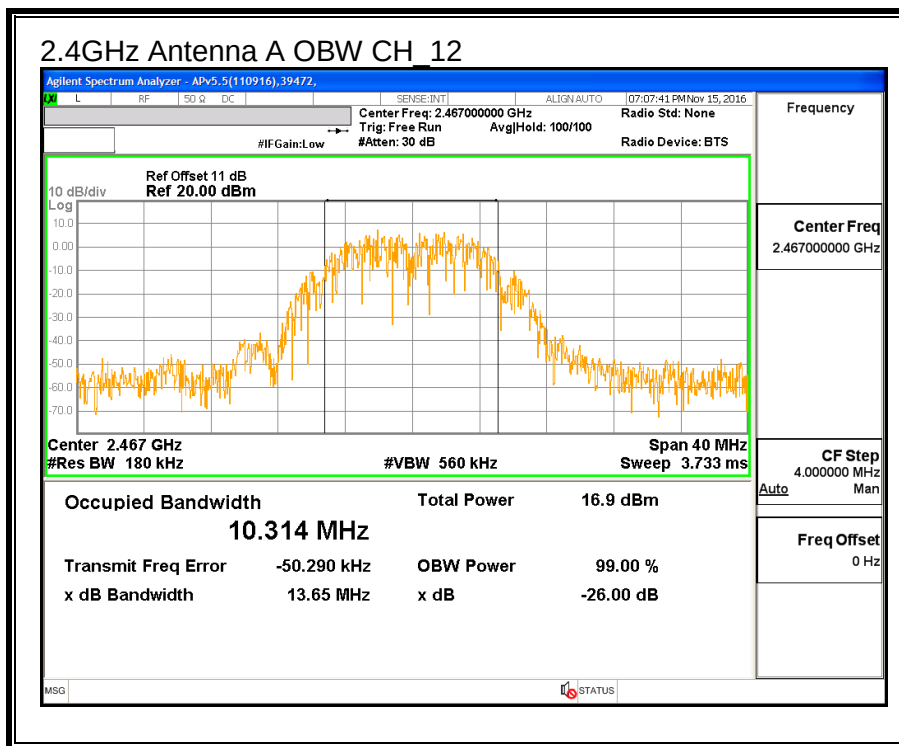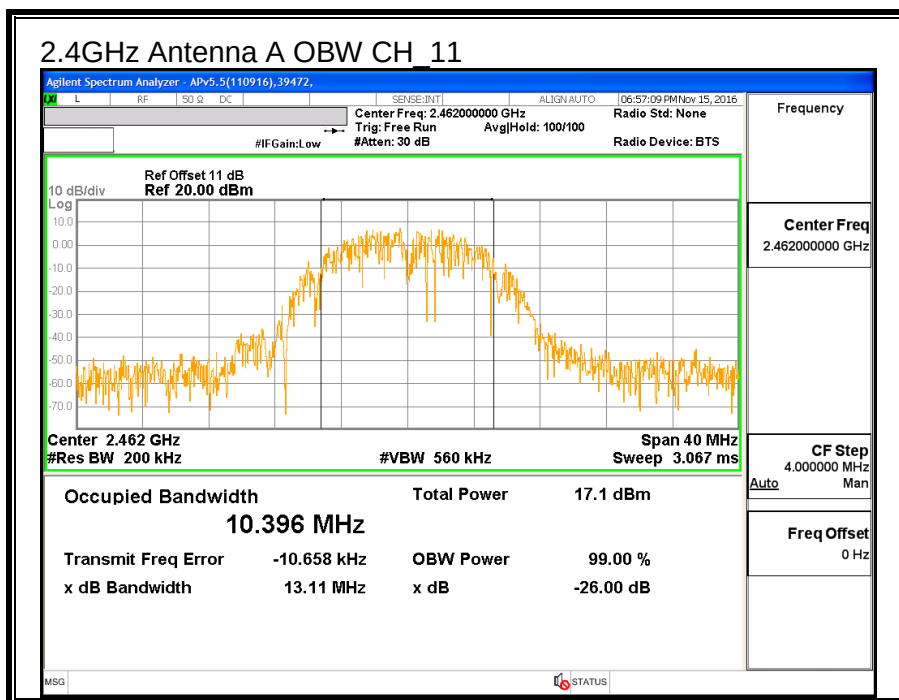

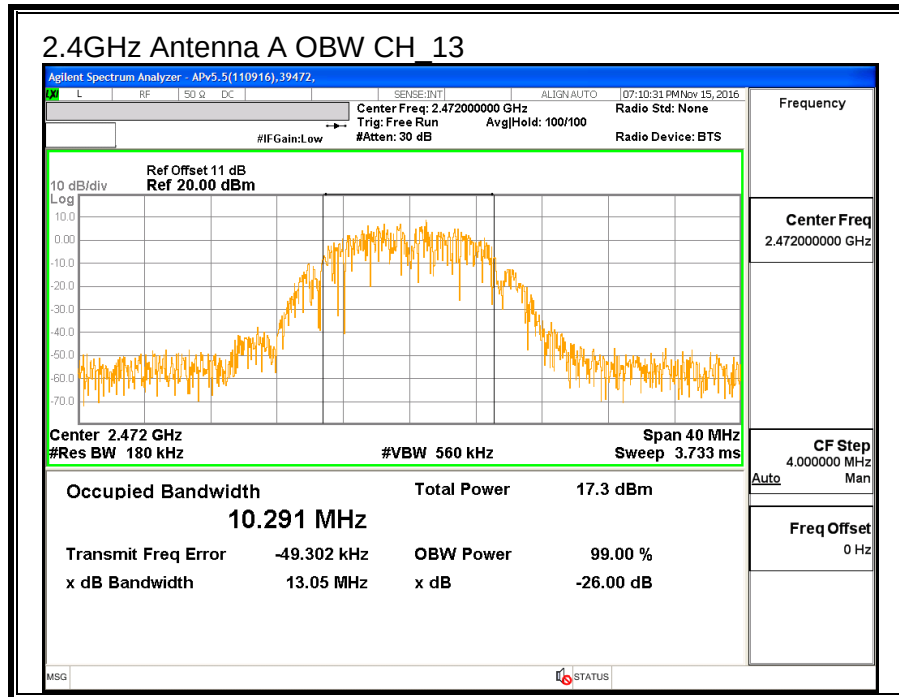

8.1.3. AVERAGE POWER

ID:	29439	Date:	12/15/2016
------------	-------	--------------	------------

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	Power Antenna A (MHz)
Low_1	2412	15.72
Middle_6	2437	15.85
High_11	2462	15.96
High_12	2467	15.95
High_13	2472	14.48

8.1.4. OUTPUT POWER

ID:	29439	Date:	12/15/2016
------------	-------	--------------	------------

LIMITS

FCC §15.247

IC RSS-247 (5.4) (4)

For systems using digital modulation in the 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Max Power (dBm)
Low	2412	1.91	30.00	30	36	30.00
Mid	2437	1.91	30.00	30	36	30.00
High_11	2462	1.91	30.00	30	36	30.00
High_12	2467	1.91	30.00	30	36	30.00
High_13	2472	1.91	30.00	30	36	30.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power
--------------------	------	--

Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Margin (dB)
Low	2412	19.01	19.01	30.00	-10.99
Mid	2437	19.15	19.15	30.00	-10.85
High_11	2462	19.17	19.17	30.00	-10.83
High_12	2467	19.15	19.15	30.00	-10.85
High_13	2472	17.92	17.92	30.00	-12.08

8.1.5. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247

IC RSS-247 (5.2) (2)



For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 KHz band during any time interval of continuous transmissions.



RESULTS


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

PSD Results

Channel	Frequency (MHz)	Meas (dBm)	Total Corr'd PSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-6.742	-6.742	8.0	-14.7
Mid	2437	-7.033	-7.033	8.0	-15.0
High_11	2462	-7.290	-7.290	8.0	-15.3
High_12	2467	-7.518	-7.518	8.0	-15.5
High_13	2472	-8.941	-8.941	8.0	-16.9

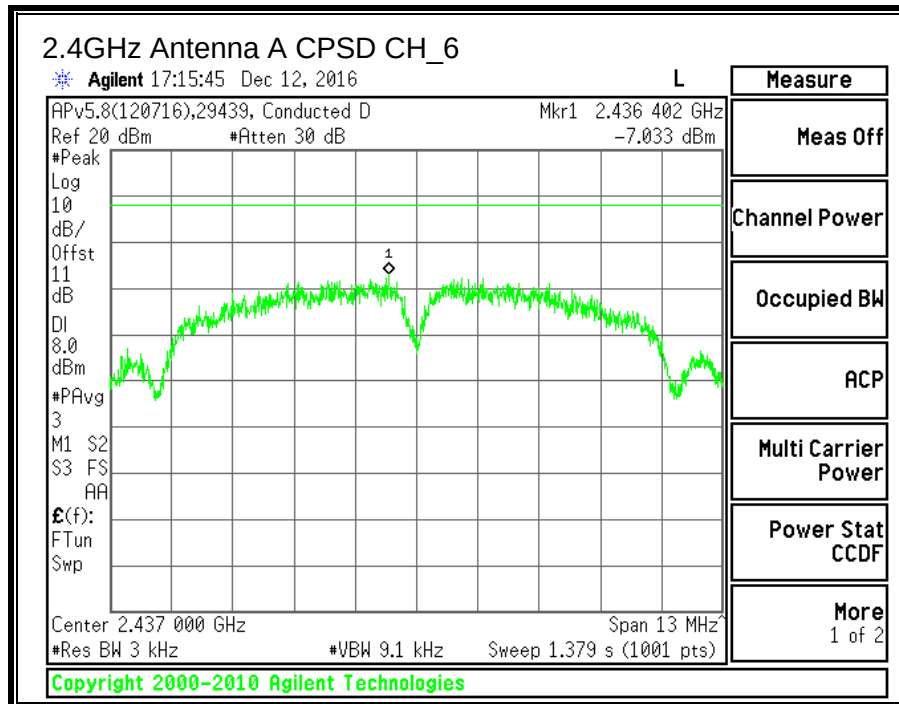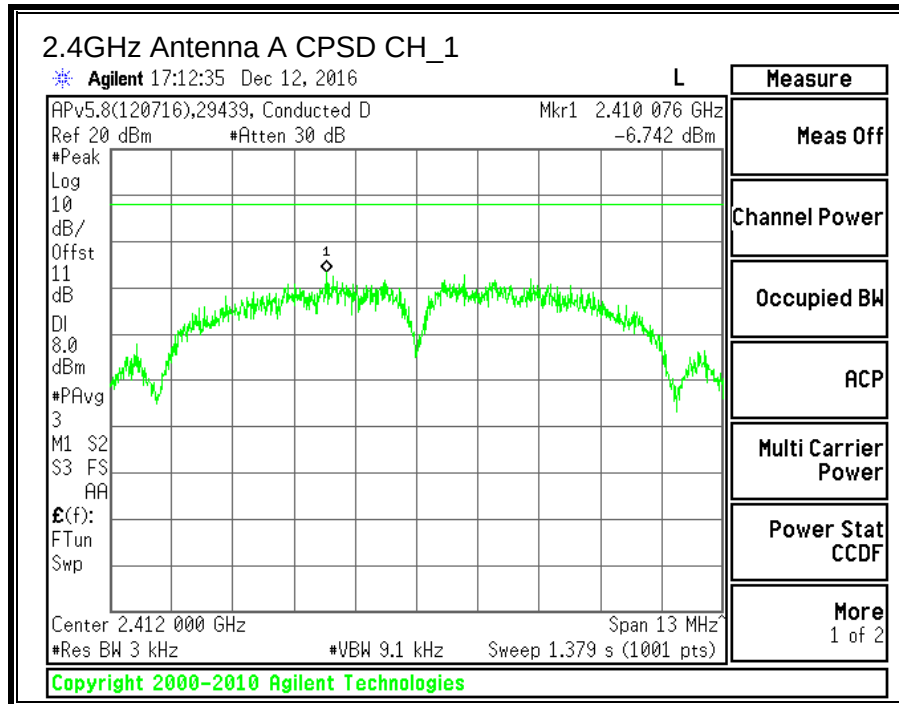

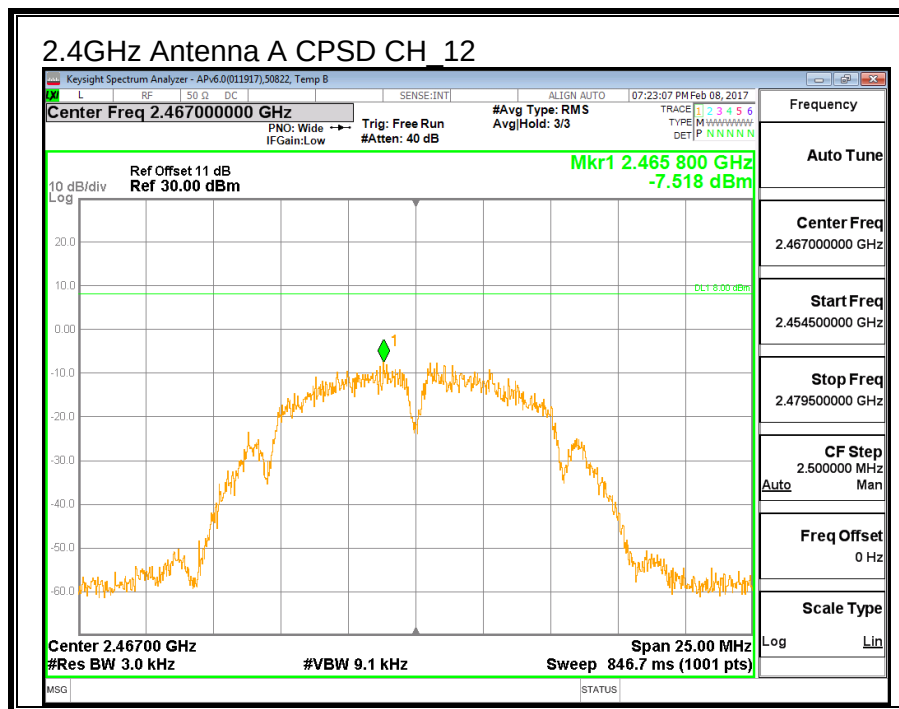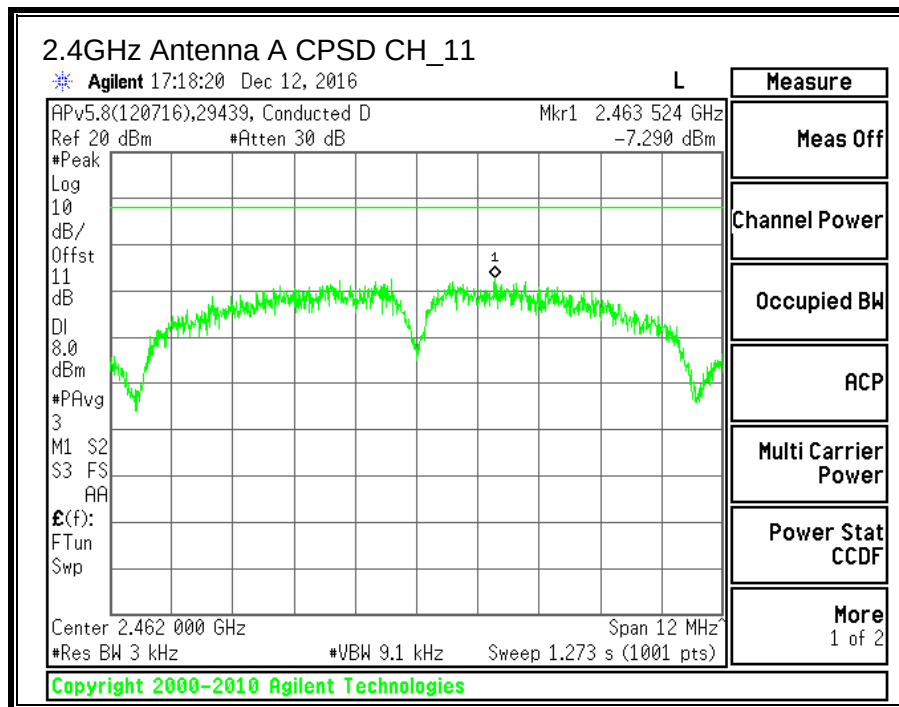

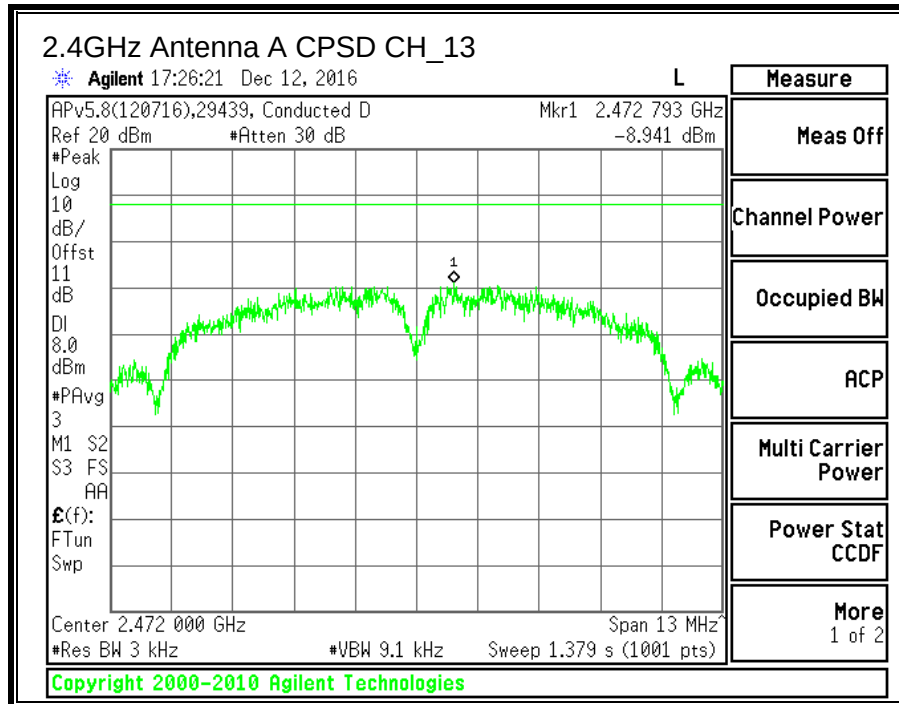



8.1.6. CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS



LIMITS


FCC §15.247 (d)



IC RSS-247 (5.5)



In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

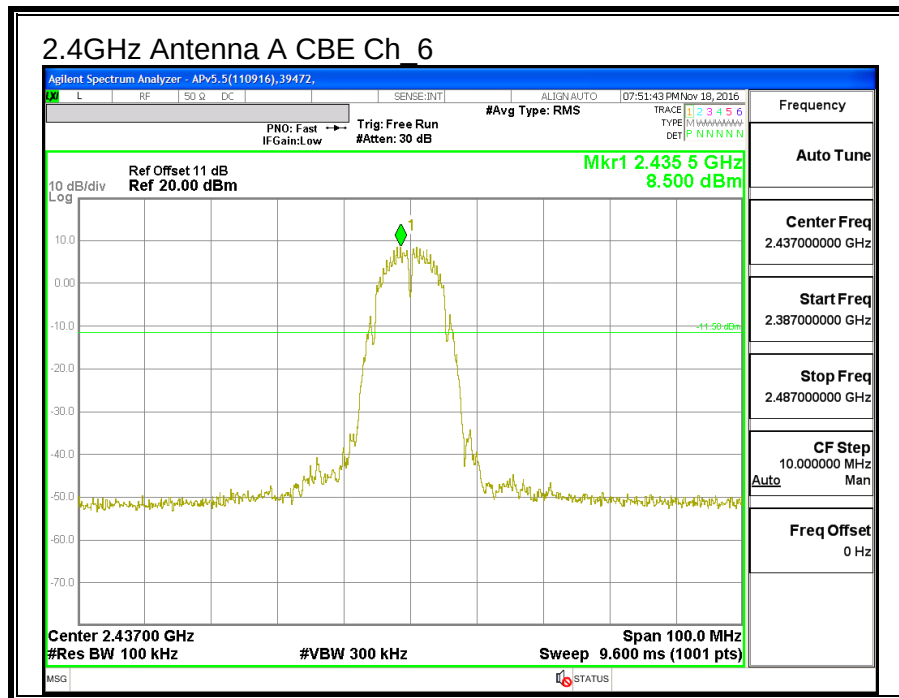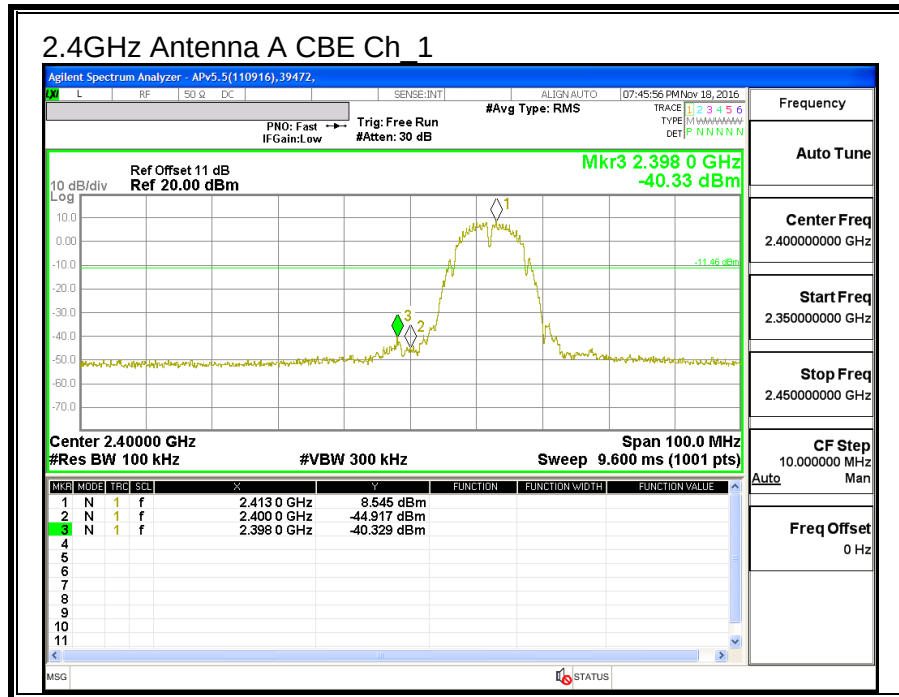

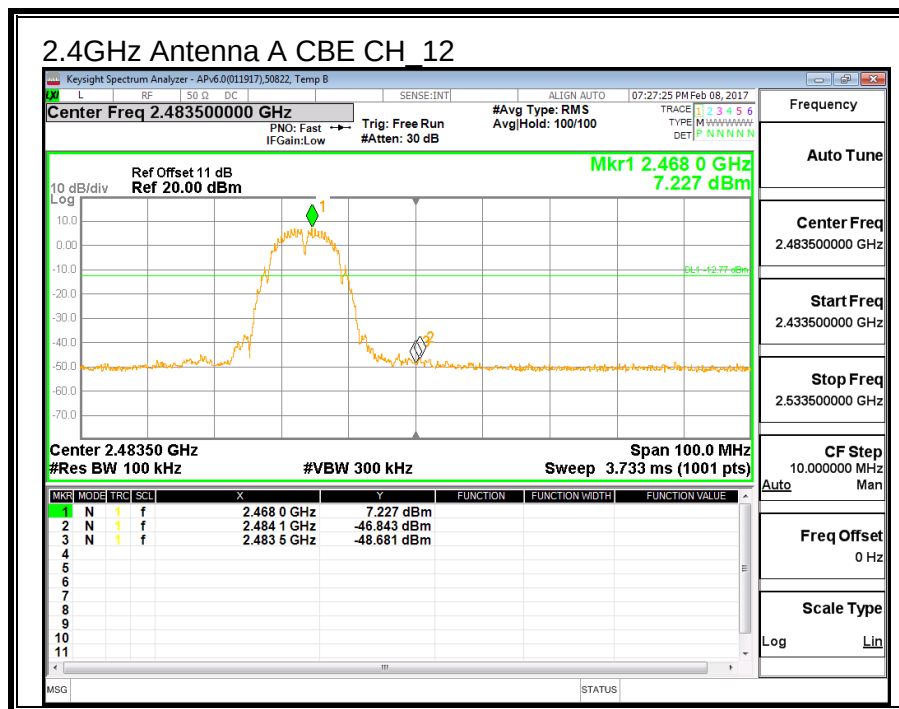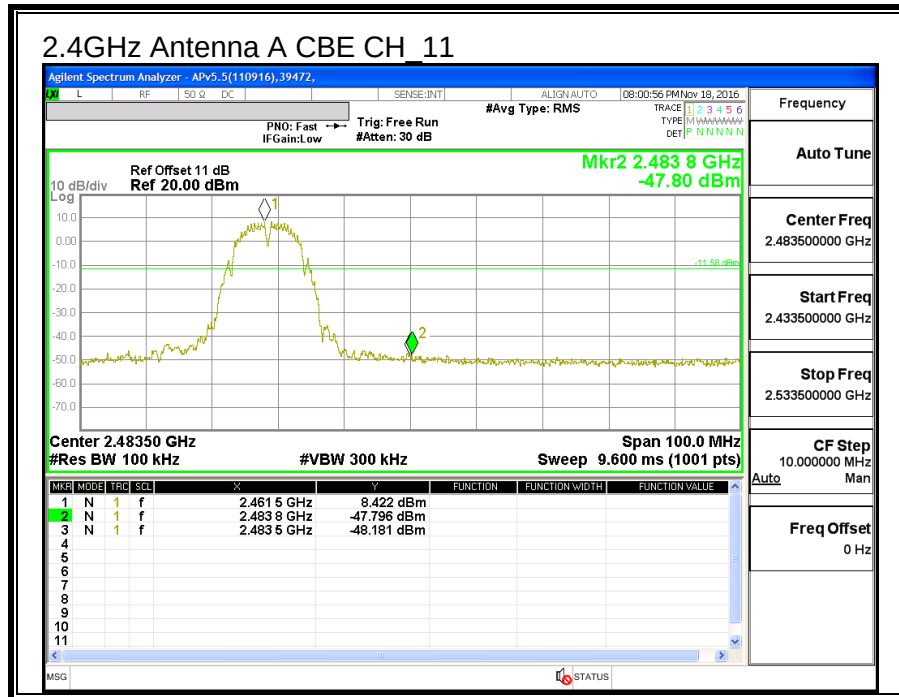

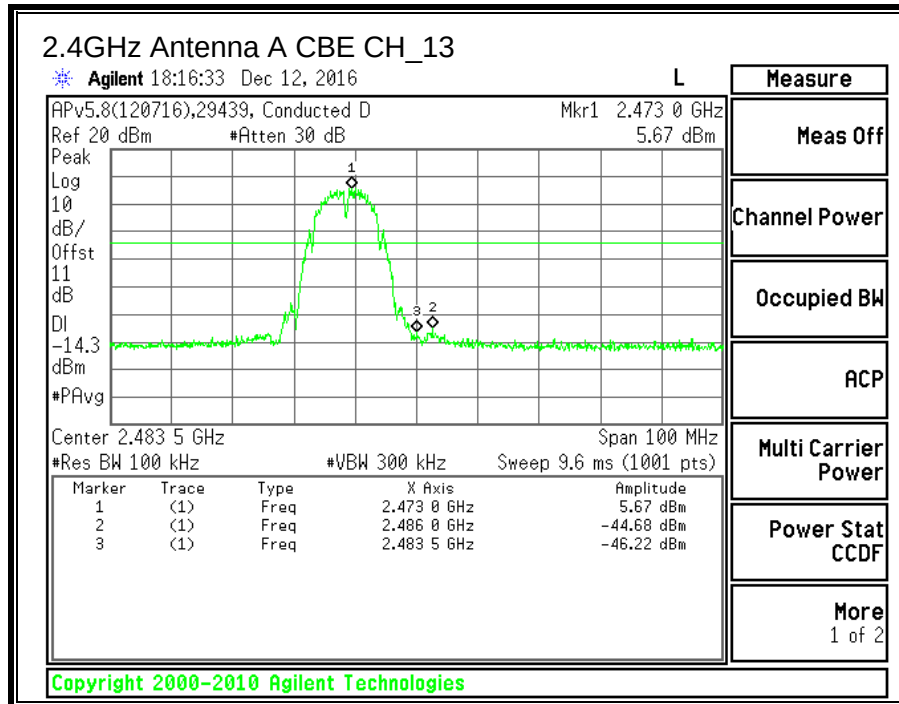

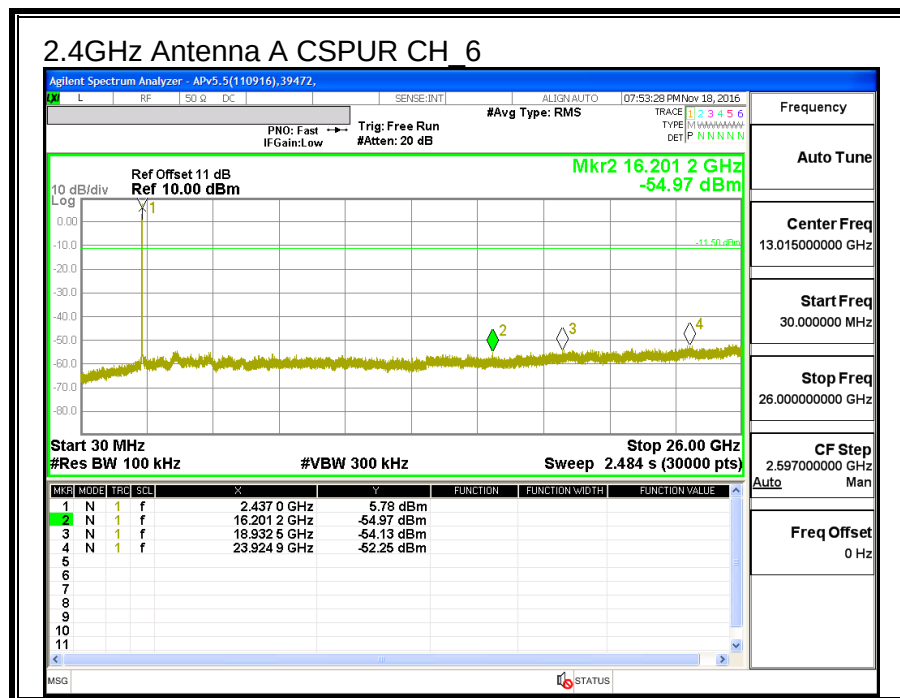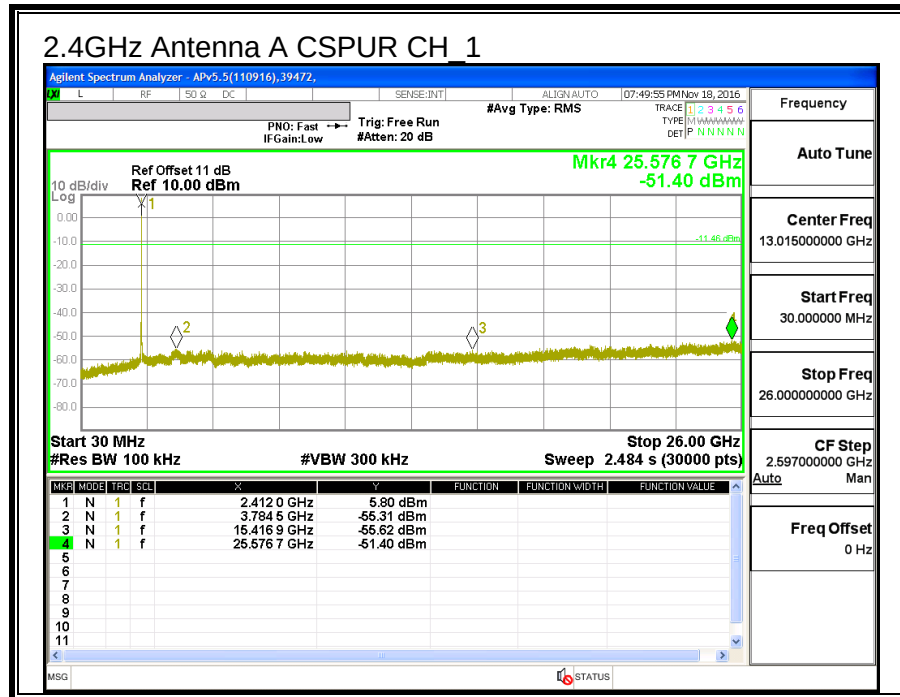

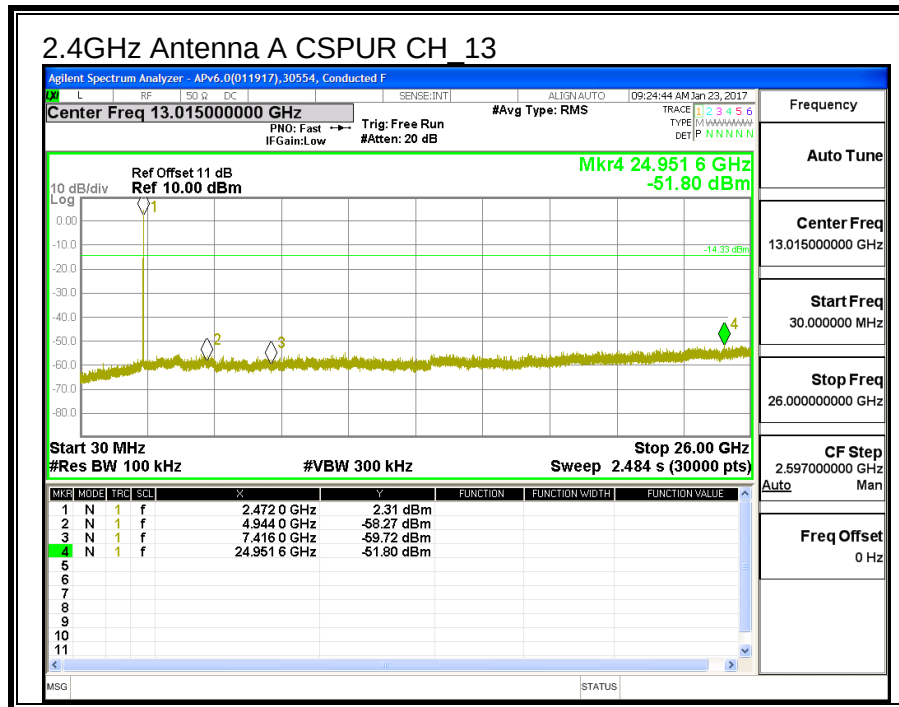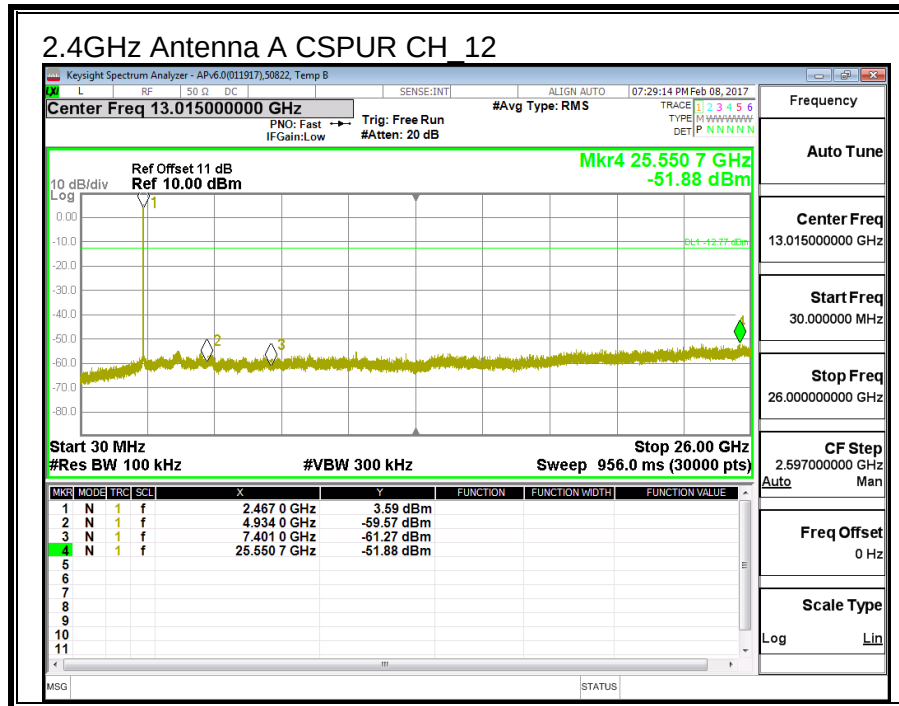

8.2. 11b ANTENNA B SISO MODE IN THE 2.4GHz BAND

8.2.1. 6 dB BANDWIDTH

LIMITS



FCC §15.247 (a) (2)



IC RSS-247 (5.2) (1)


The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS

Channel	Frequency (MHz)	6 dB BW Antenna B(MHz)	Minimum Limit (MHz)
Low_1	2412	8.530	0.5
Middle_6	2437	8.105	0.5
High_11	2462	7.985	0.5
High_11	2467	8.055	0.5
High_13	2472	8.085	0.5

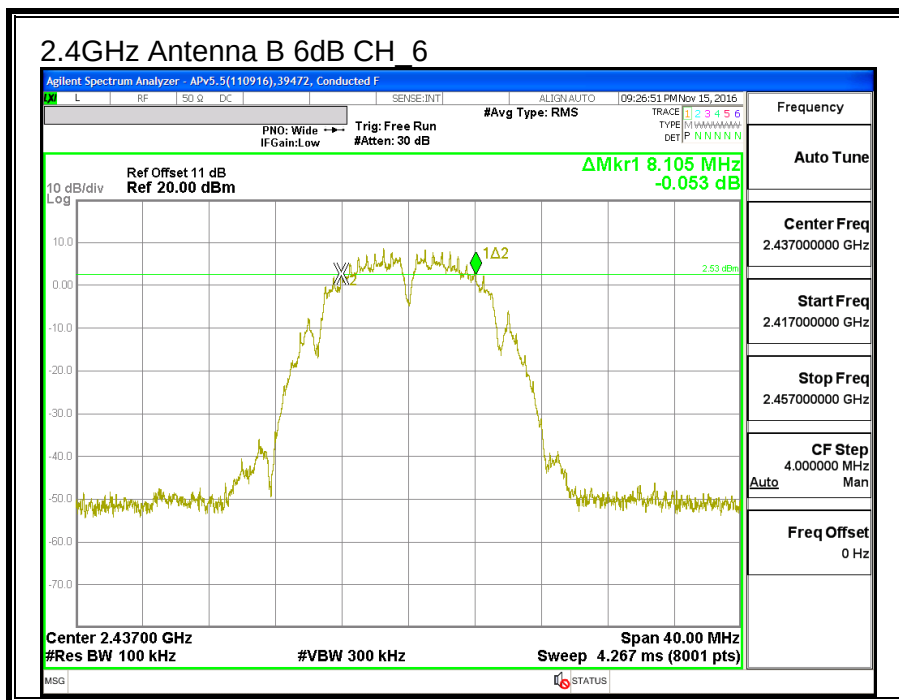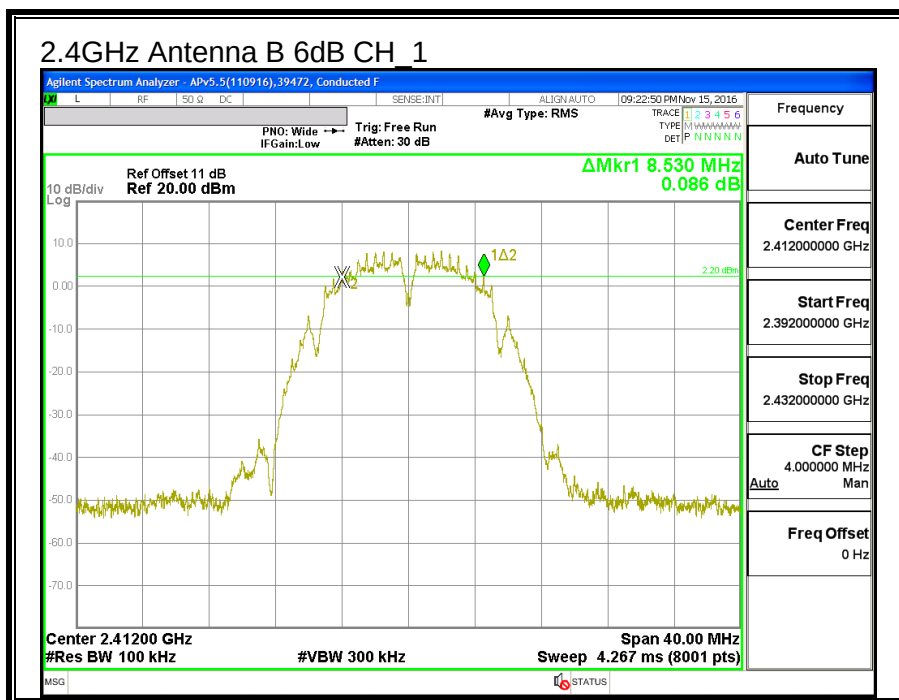

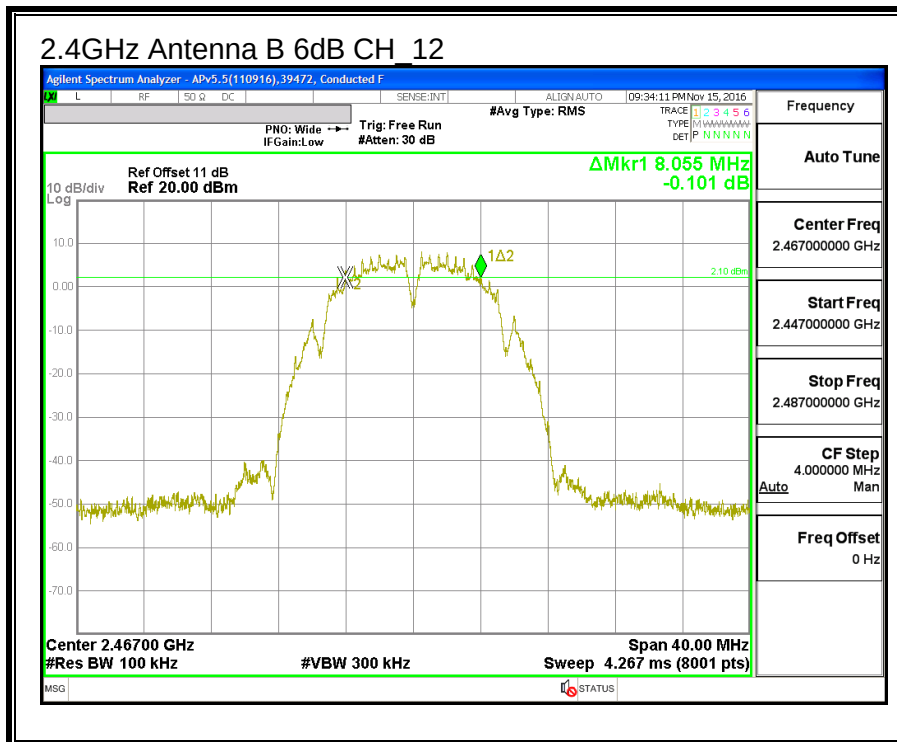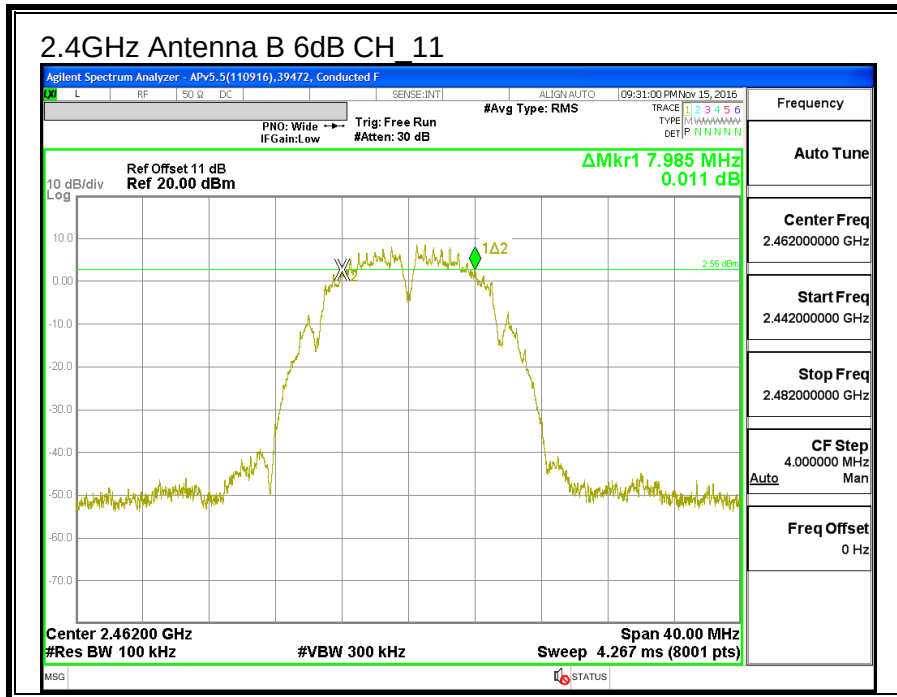

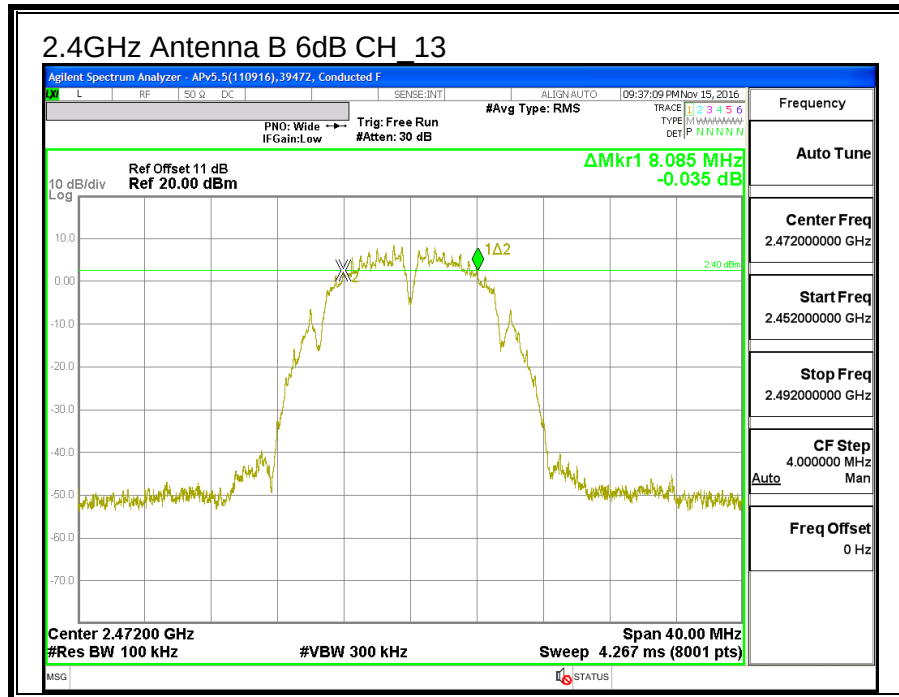



8.2.2. 99% BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth Antenna B(MHz)
Low_1	2412	10.385
Middle_6	2437	10.419
High_11	2462	10.233
High_12	2467	10.373
High_13	2472	10.350

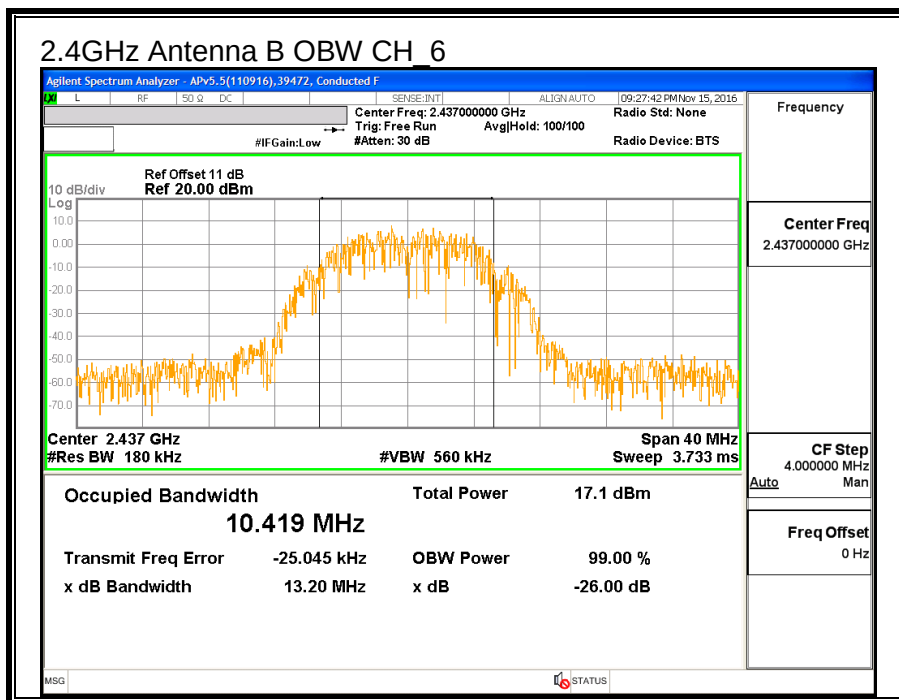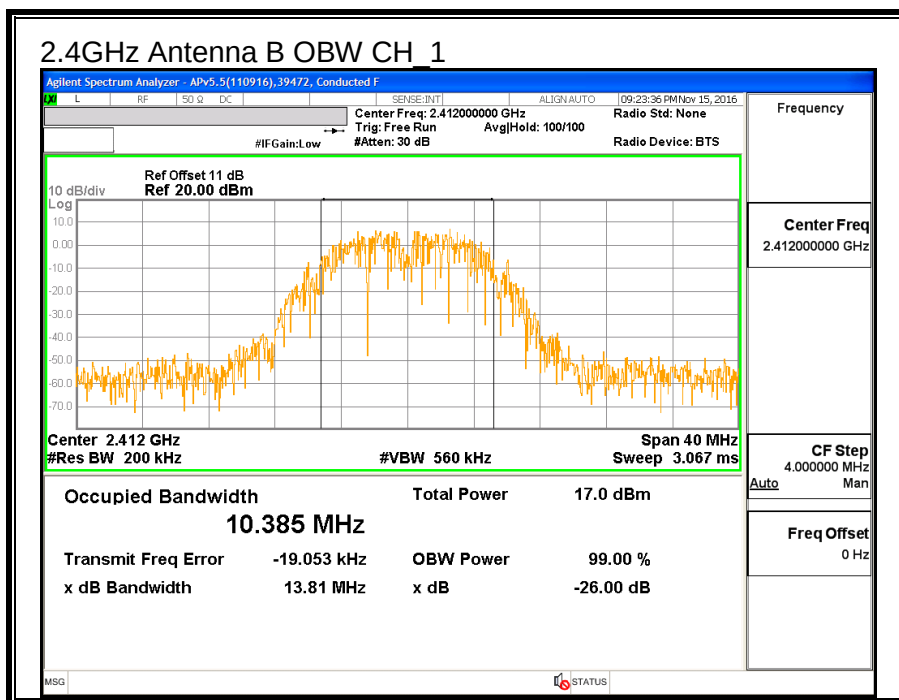

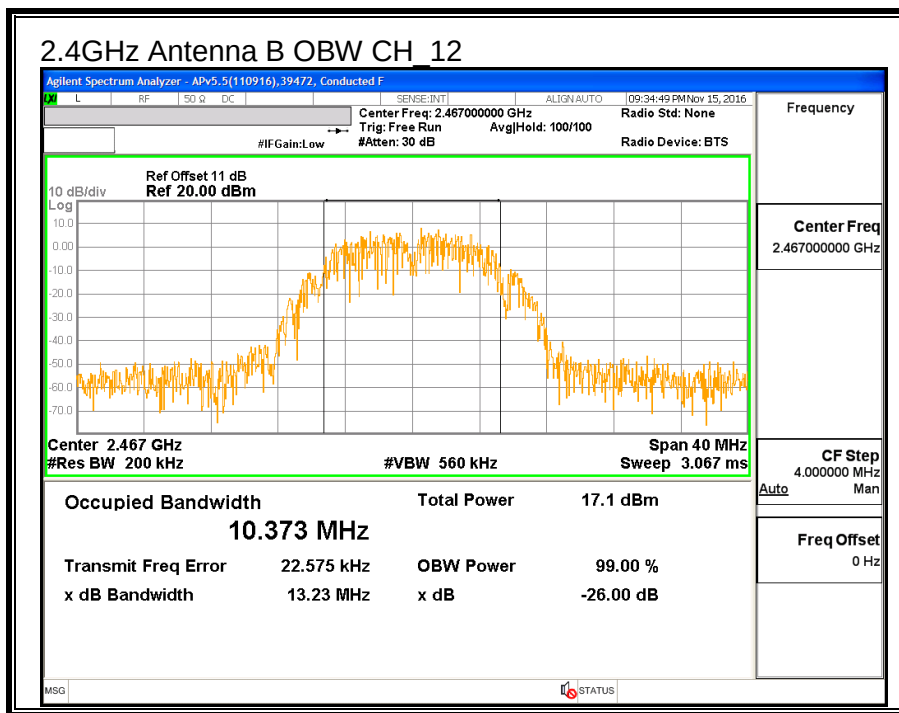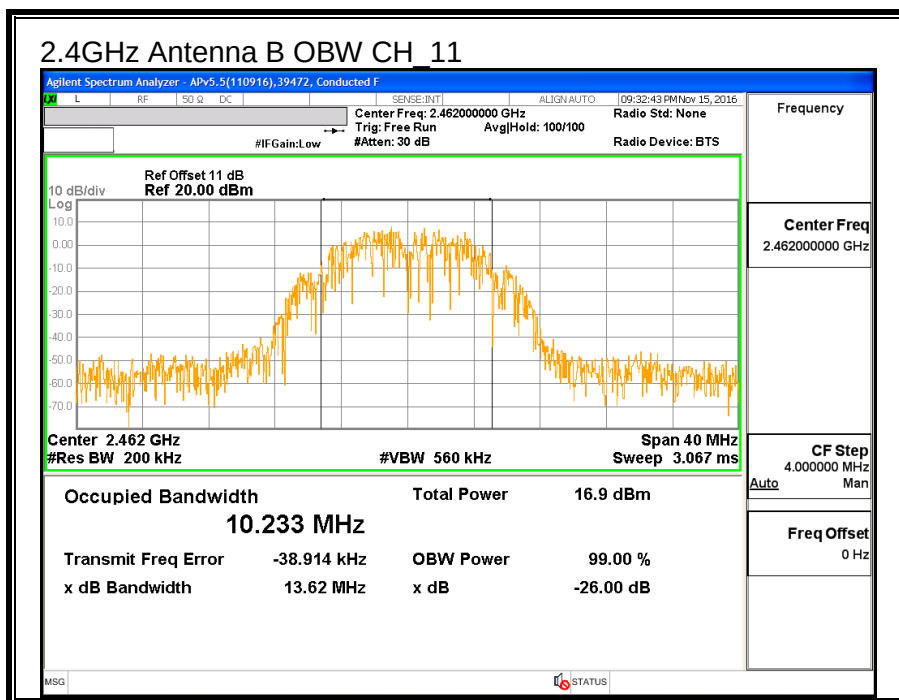

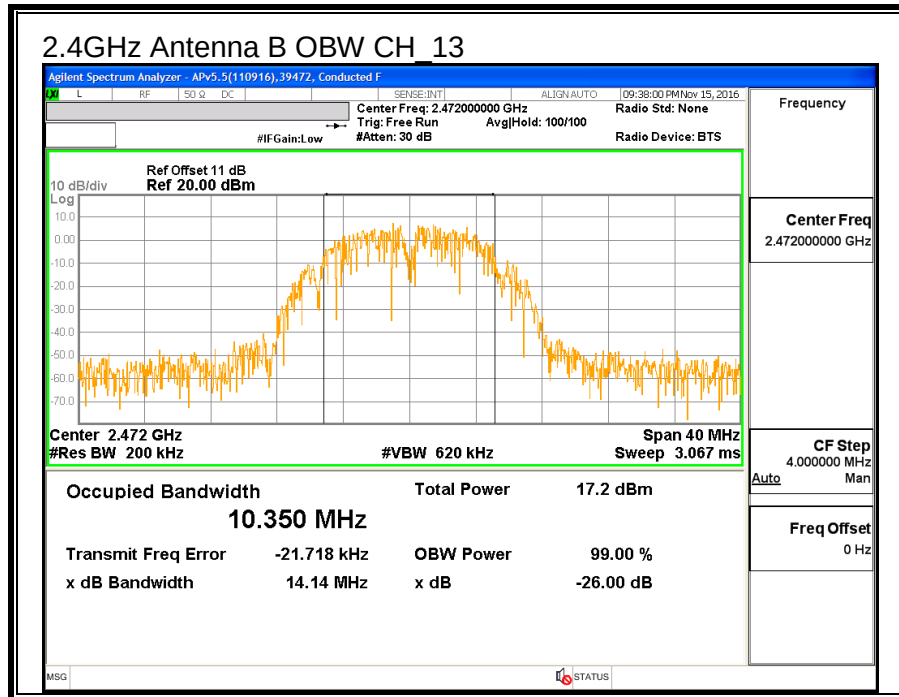

8.2.3. AVERAGE POWER

ID:	29439	Date:	12/15/2016
------------	-------	--------------	------------

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	Power Antenna B (MHz)
Low 1	2412	15.28
Middle 6	2437	15.31
High 11	2462	15.40
High 12	2467	15.40
High 13	2472	14.48

8.2.4. OUTPUT POWER

ID:	29439	Date:	12/15/2016
------------	-------	--------------	------------

LIMITS

FCC §15.247

IC RSS-247 (5.4) (4)

For systems using digital modulation in the 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Max Power (dBm)
Low	2412	0.56	30.00	30	36	30.00
Mid	2437	0.56	30.00	30	36	30.00
High_11	2462	0.56	30.00	30	36	30.00
High_12	2467	0.56	30.00	30	36	30.00
High_13	2472	0.56	30.00	30	36	30.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power
--------------------	------	--

Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Margin (dB)
Low	2412	18.67	18.67	30.00	-11.33
Mid	2437	18.61	18.61	30.00	-11.39
High_11	2462	18.67	18.67	30.00	-11.33
High_12	2467	18.65	18.65	30.00	-11.35
High_13	2472	18.02	18.02	30.00	-11.98

8.2.5. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247

IC RSS-247 (5.2) (2)



For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 KHz band during any time interval of continuous transmissions.



RESULTS


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

PSD Results



Channel	Frequency (MHz)	Meas (dBm)	Total Corr'd PSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-7.237	-7.237	8.0	-15.2
Mid	2437	-7.189	-7.189	8.0	-15.2
High_11	2462	-7.393	-7.393	8.0	-15.4
High_12	2467	-8.004	-8.004	8.0	-16.0
High_13	2472	-9.088	-9.088	8.0	-17.1

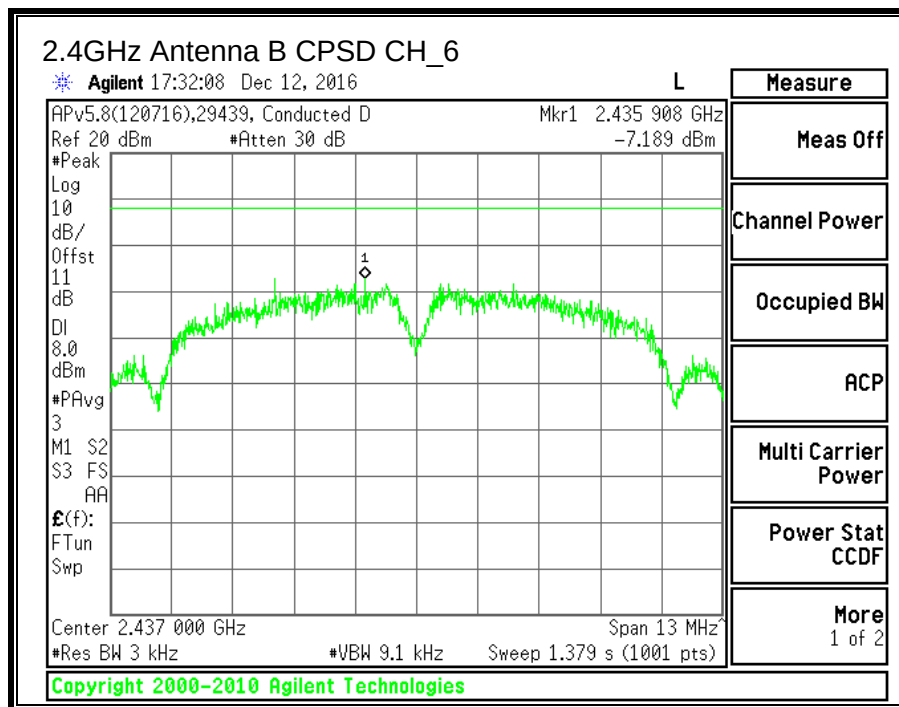
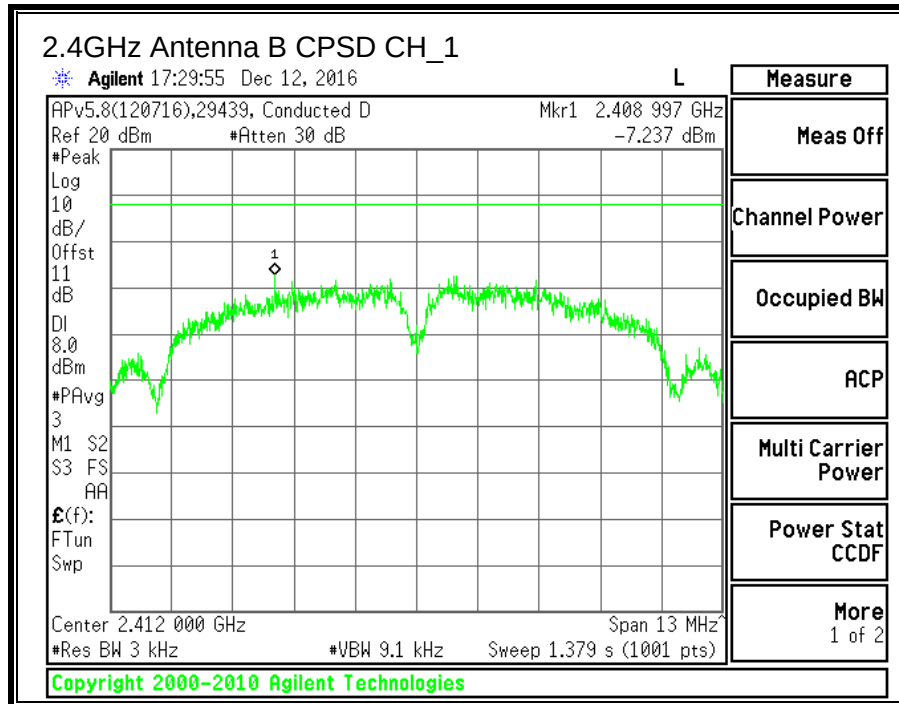


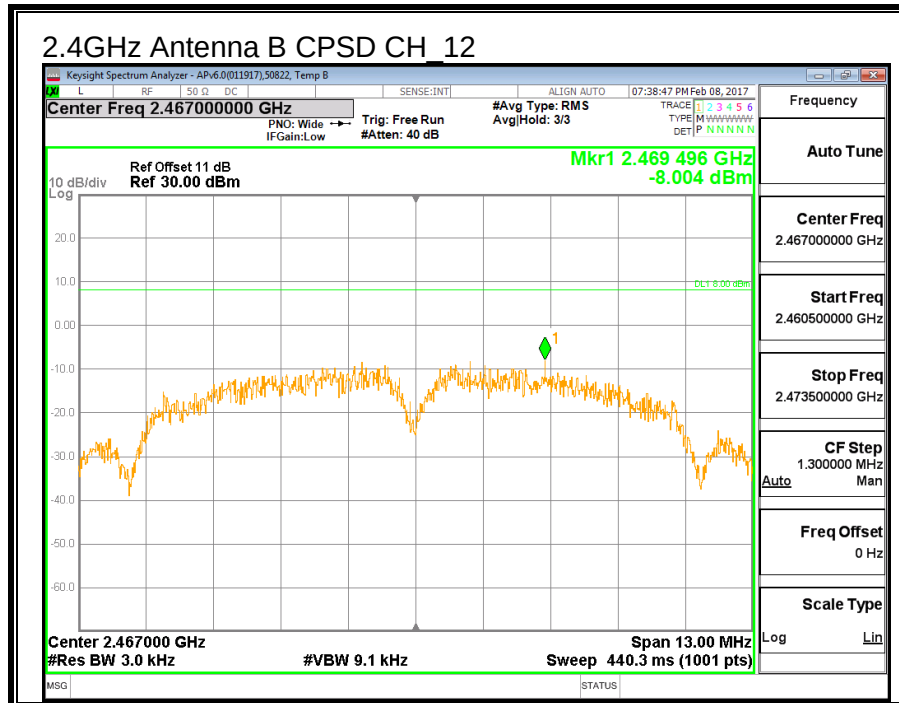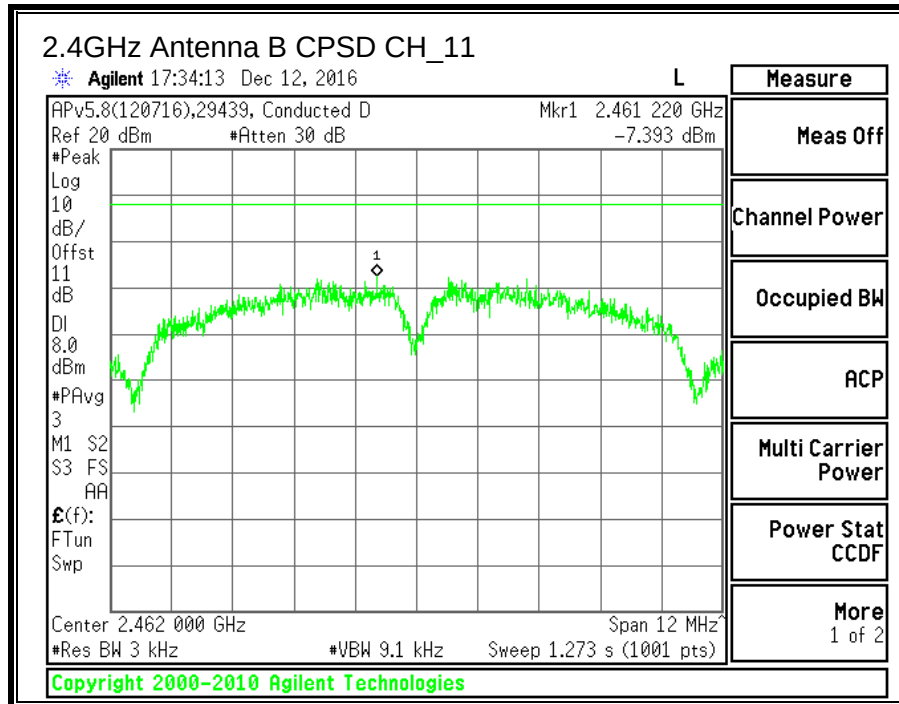



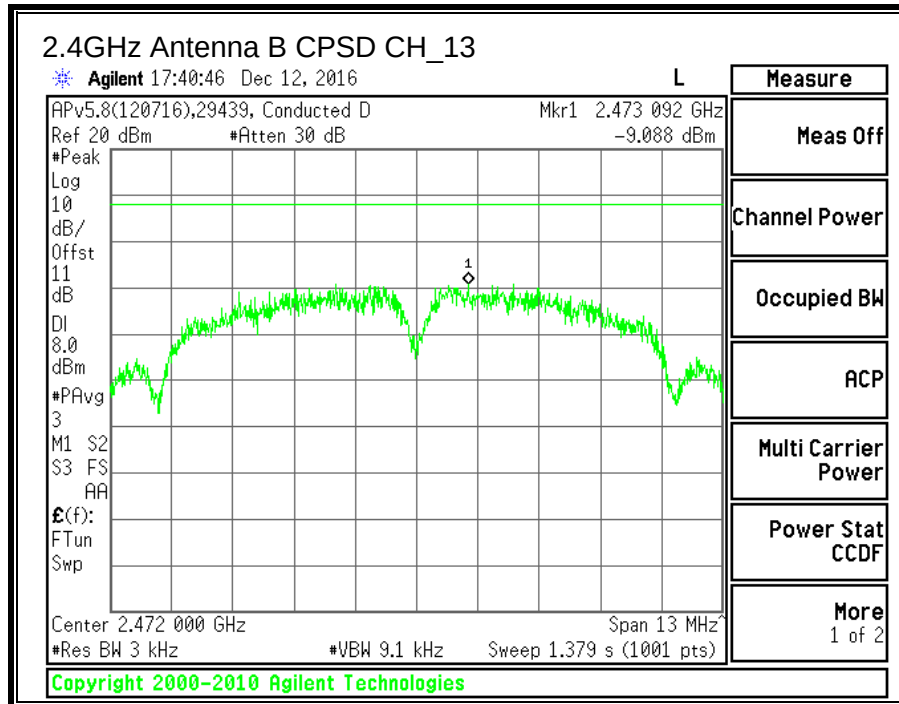




8.2.6. CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS

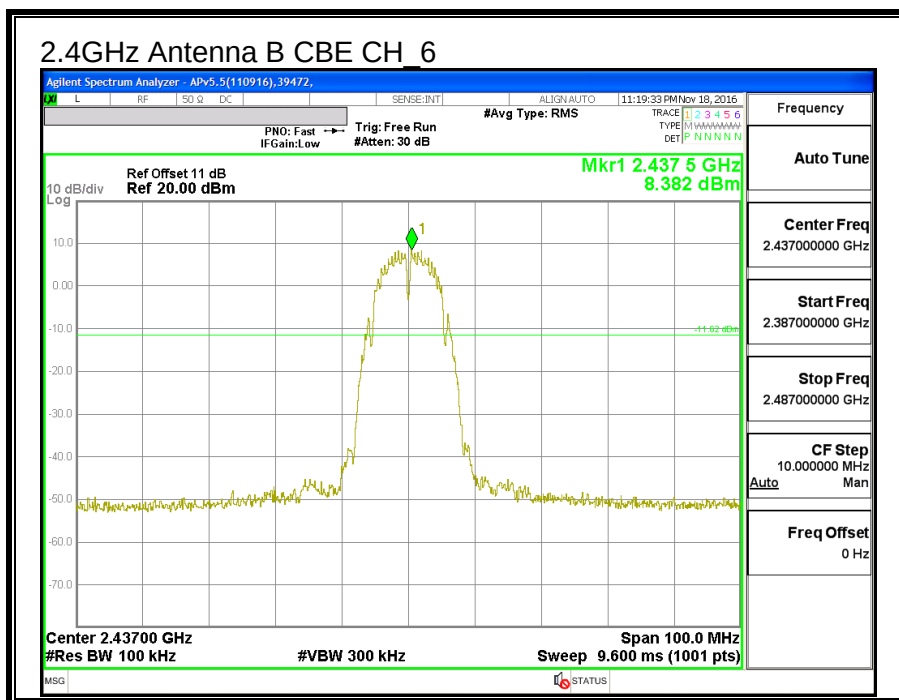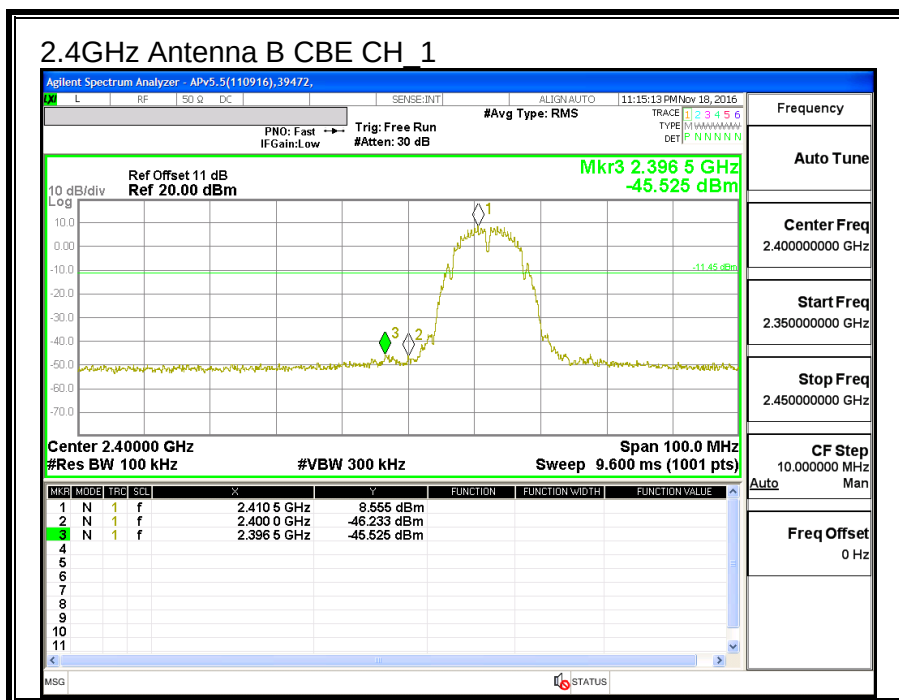


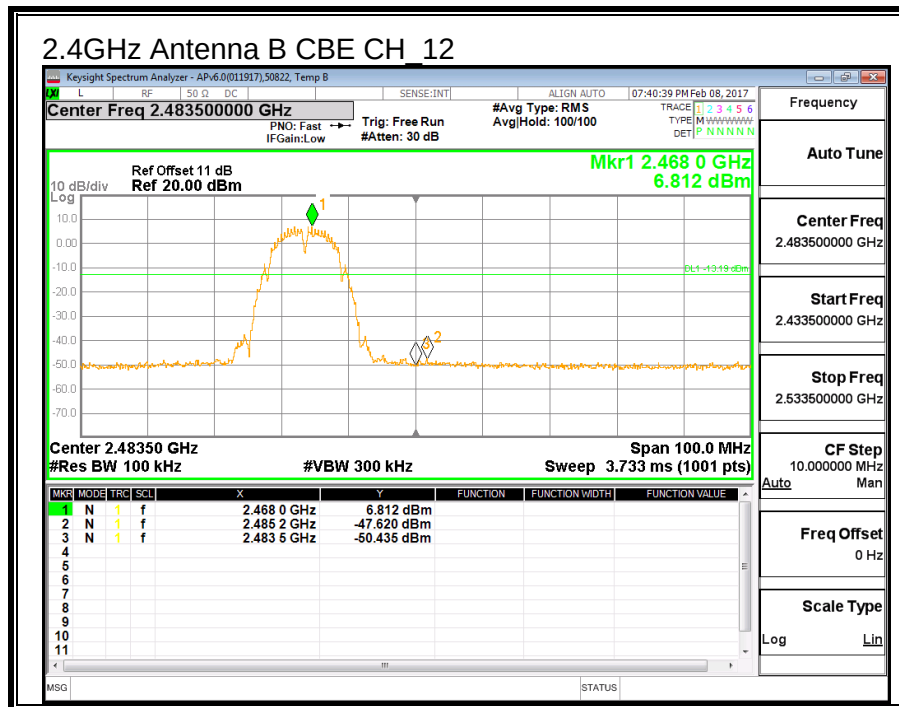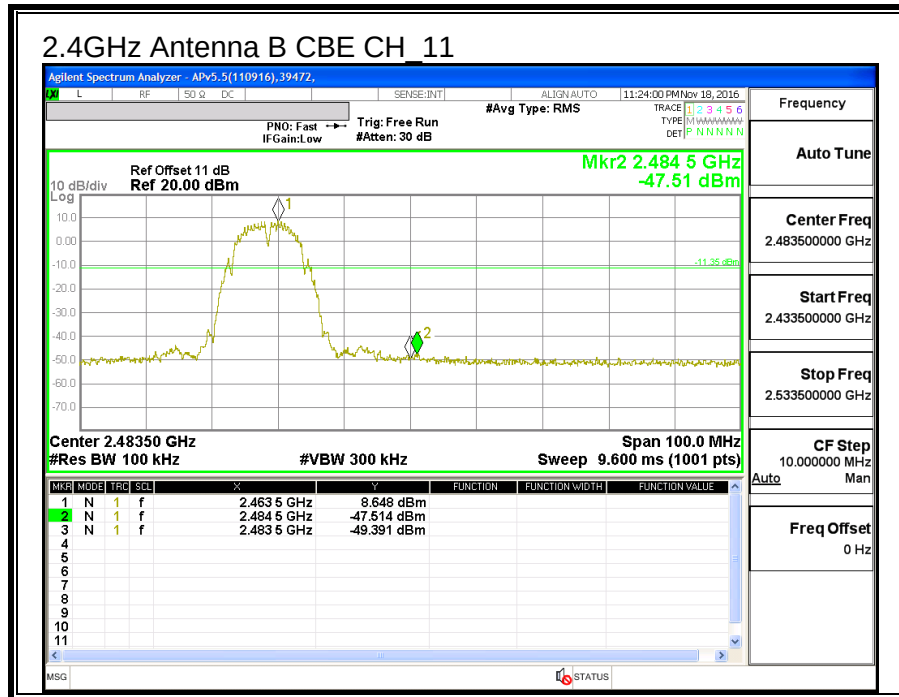

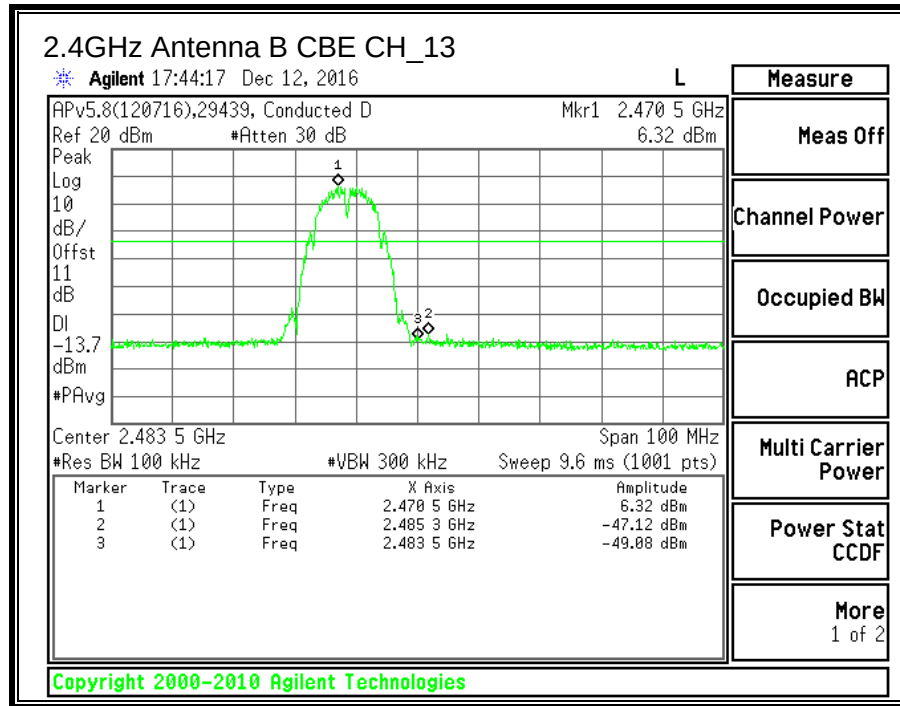

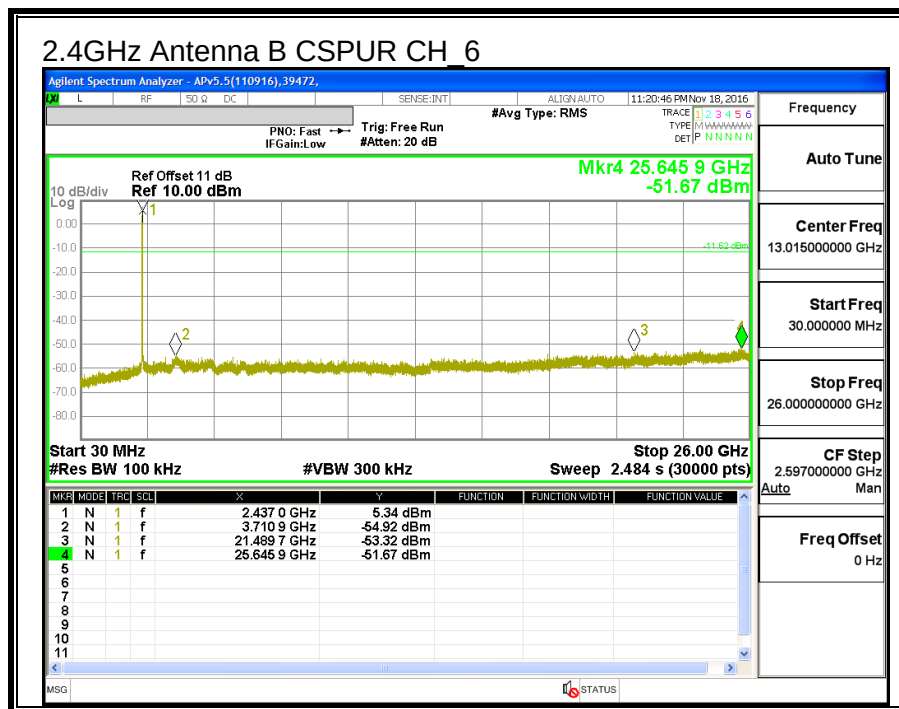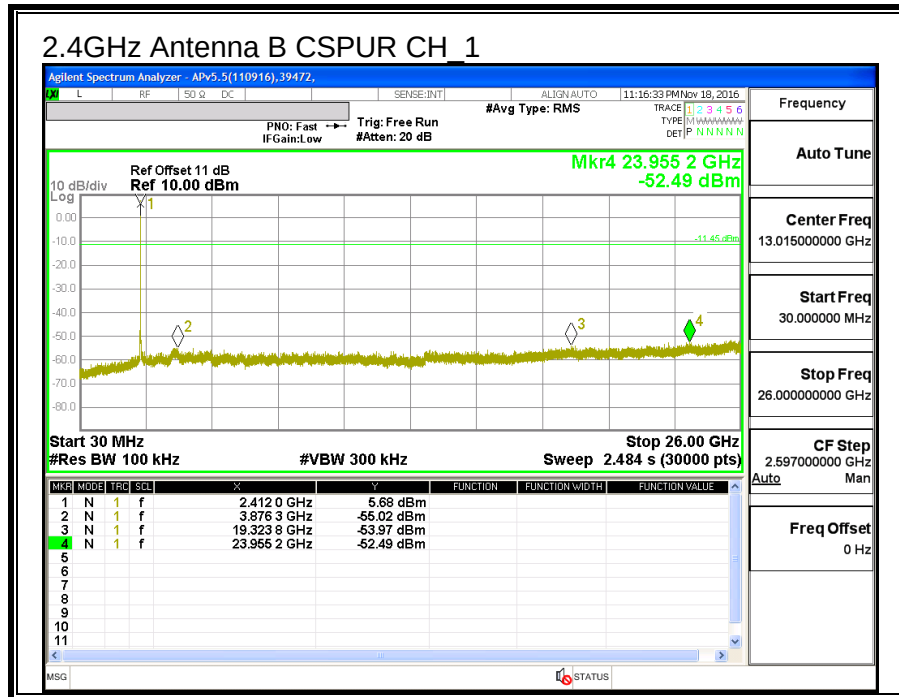

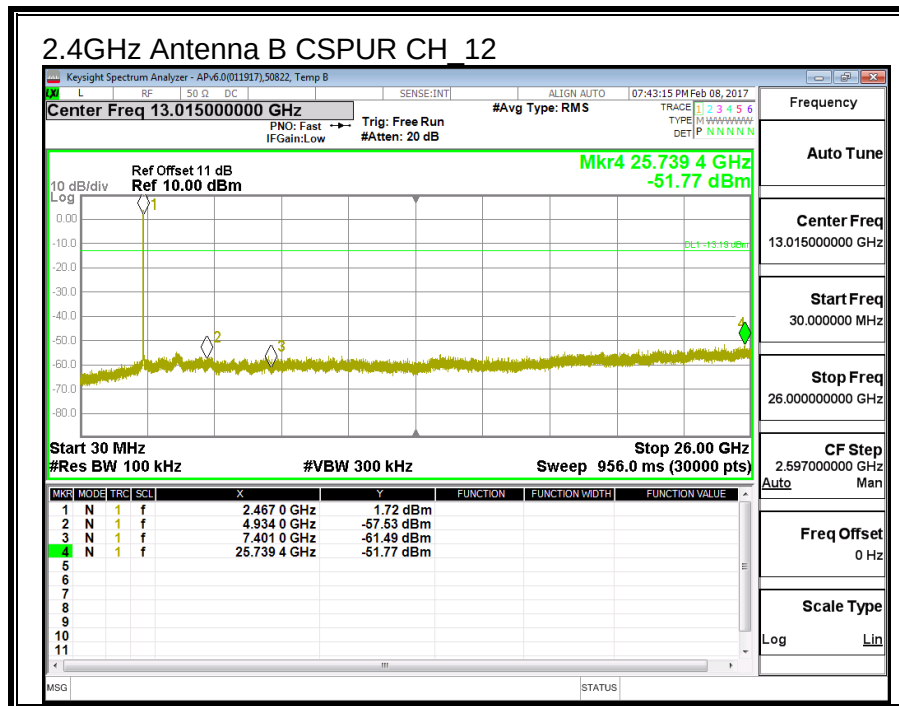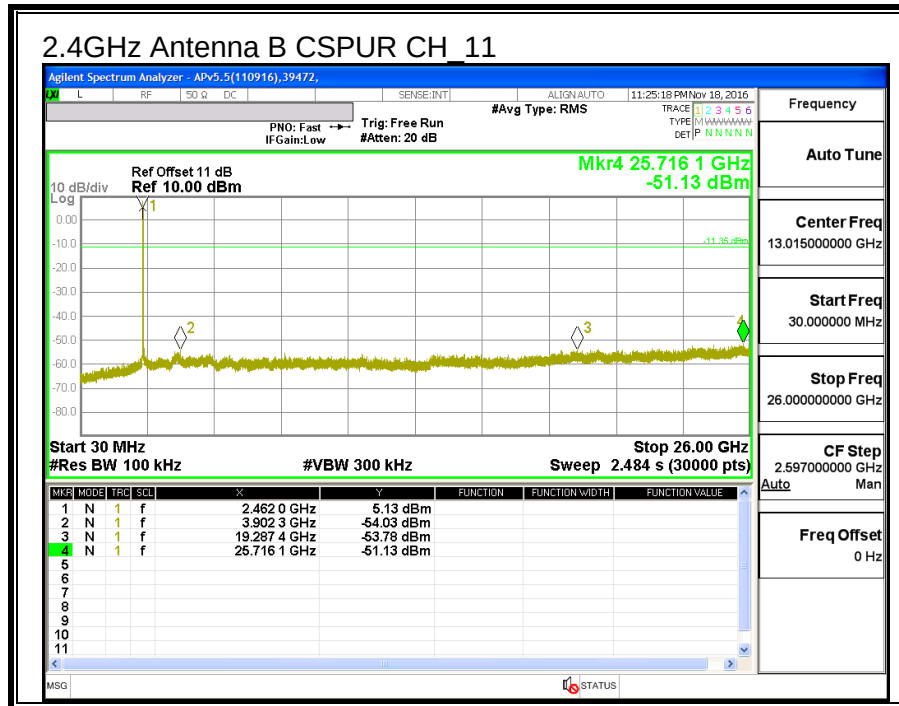

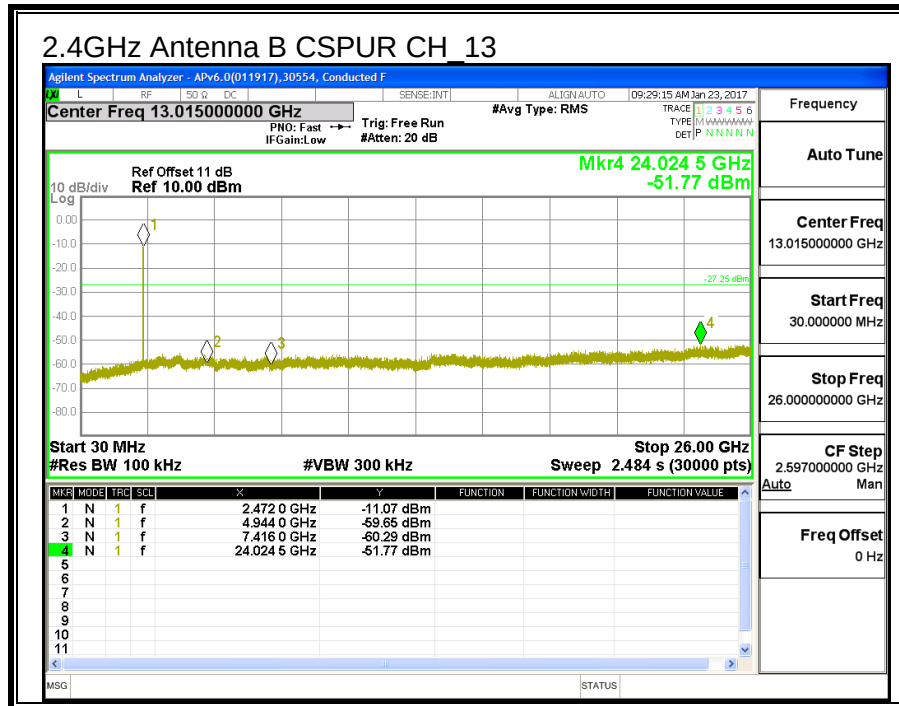

8.3. 11n HT20 ANTENNA A SISO MODE IN THE 2.4GHz BAND

8.3.1. 6 dB BANDWIDTH

LIMITS



FCC §15.247 (a) (2)



IC RSS-247 (5.2) (1)



The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS

Channel	Frequency (MHz)	6 dB BW Antenna A (MHz)	Minimum Limit (MHz)
Low_1	2412	17.020	0.5
Middle_6	2437	17.540	0.5
High_10	2457	17.130	0.5
High_11	2462	15.910	0.5
High_12	2467	17.250	0.5
High_13	2472	17.545	0.5

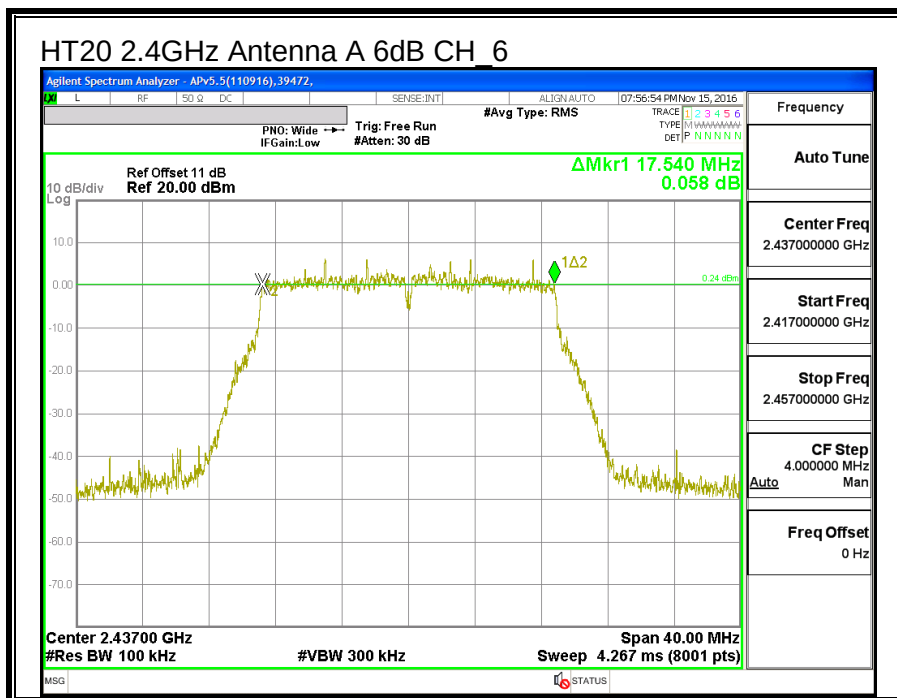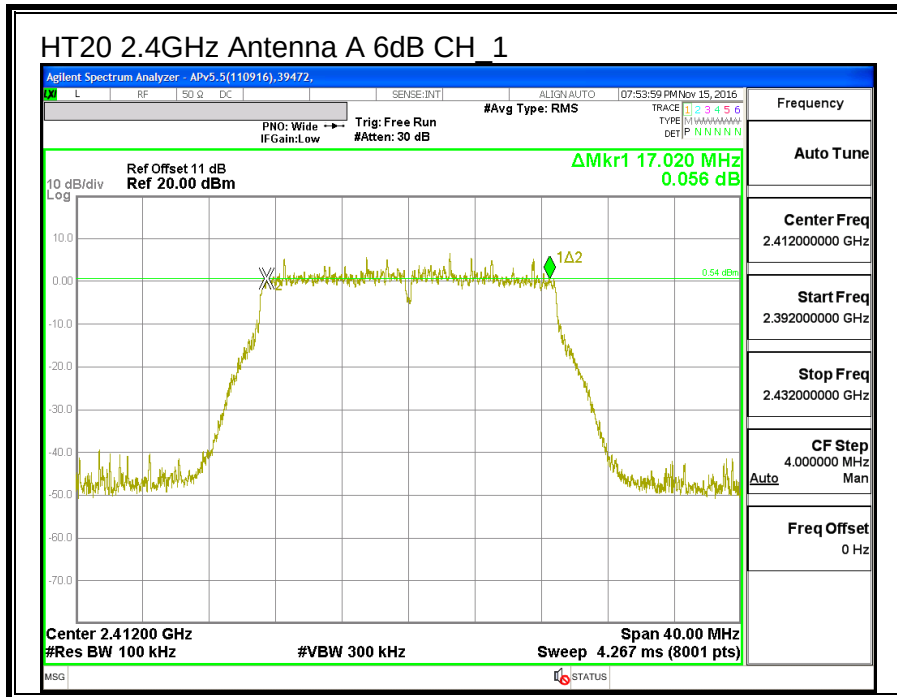

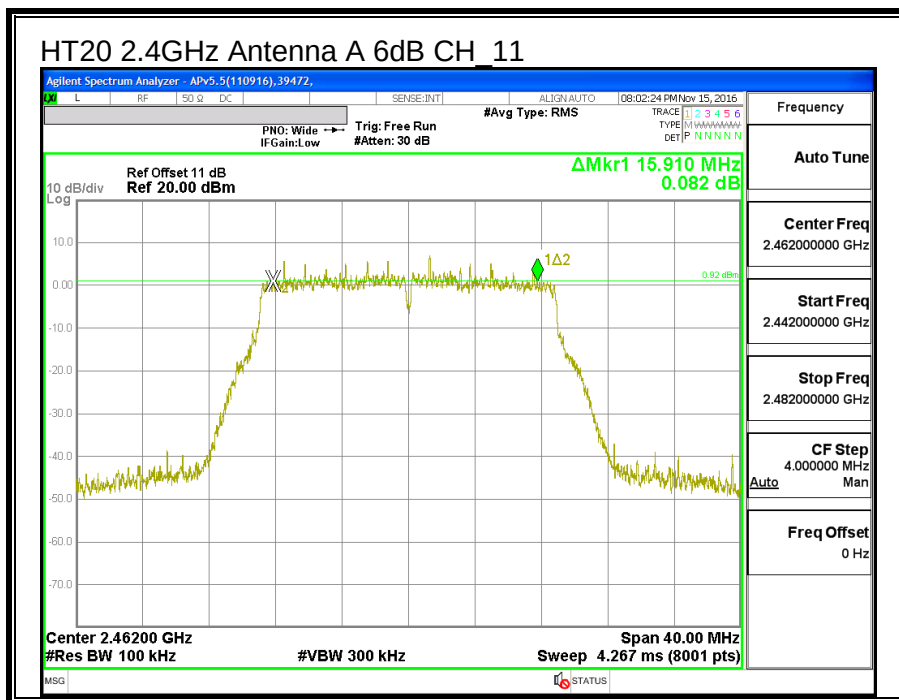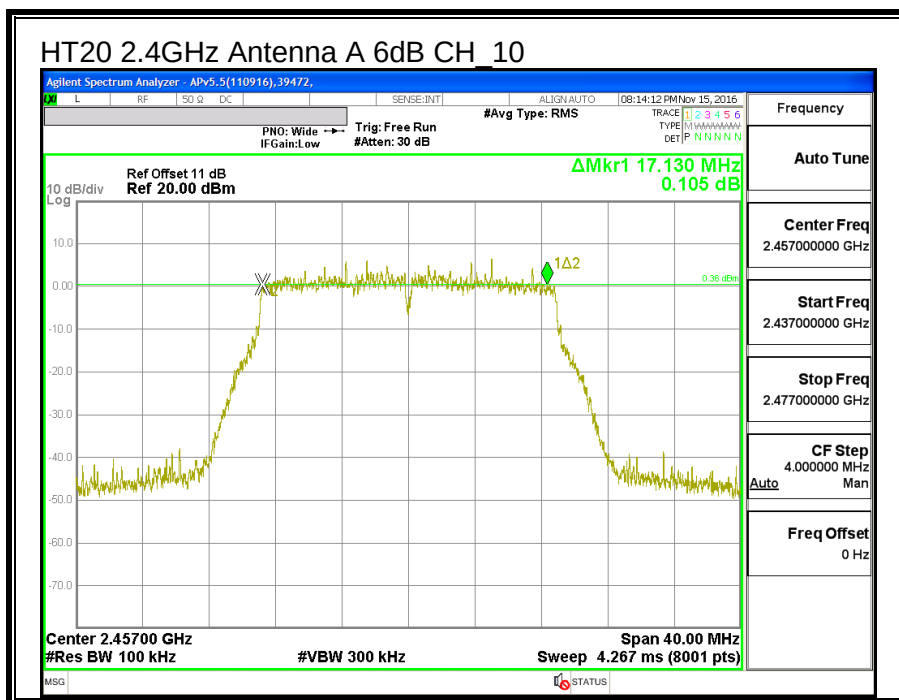

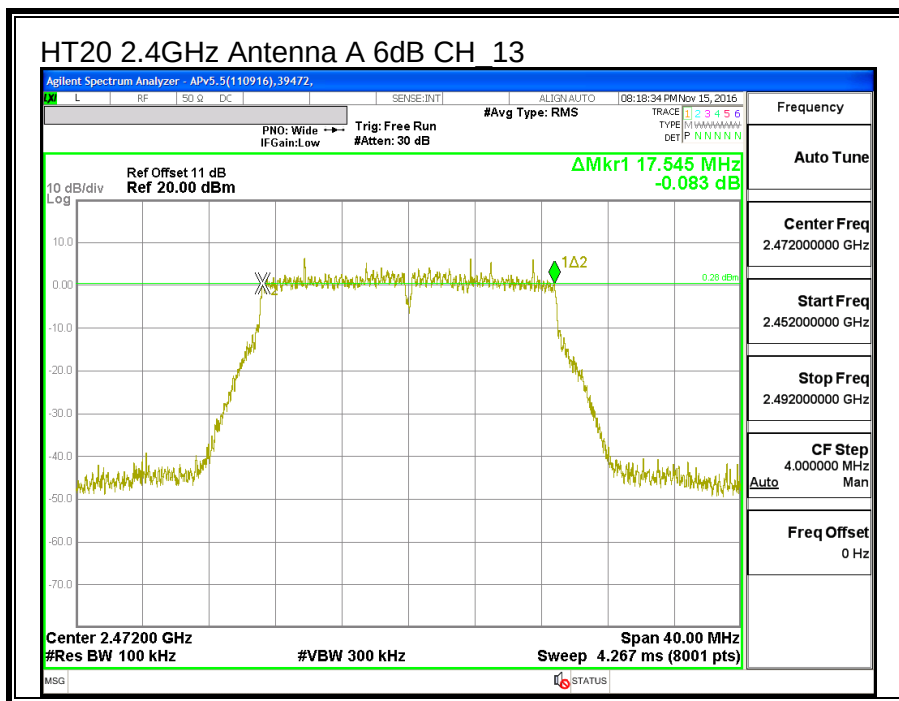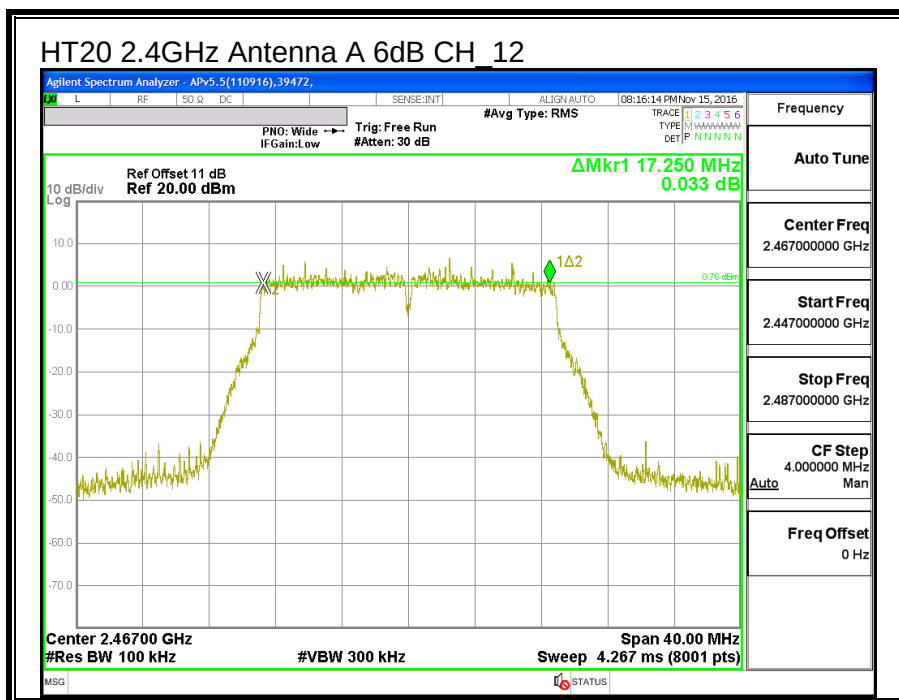



8.3.2. 99% BANDWIDTH



LIMITS



None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth Antenna A (MHz)
Low_1	2412	17.698
Middle_6	2437	17.785
High_10	2457	17.785
High_11	2462	17.828
High_12	2467	17.705
High_13	2472	17.763

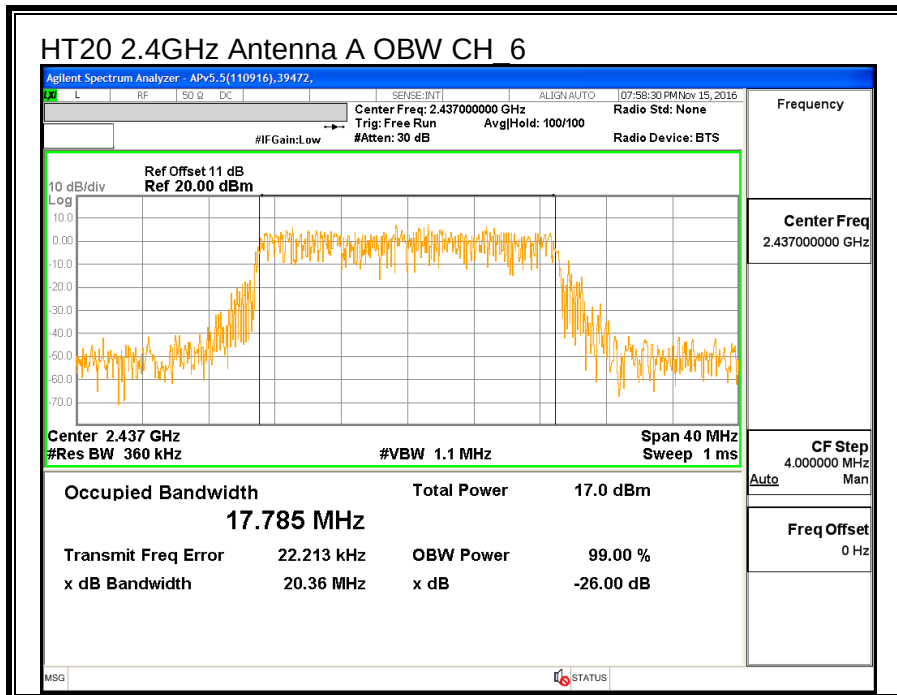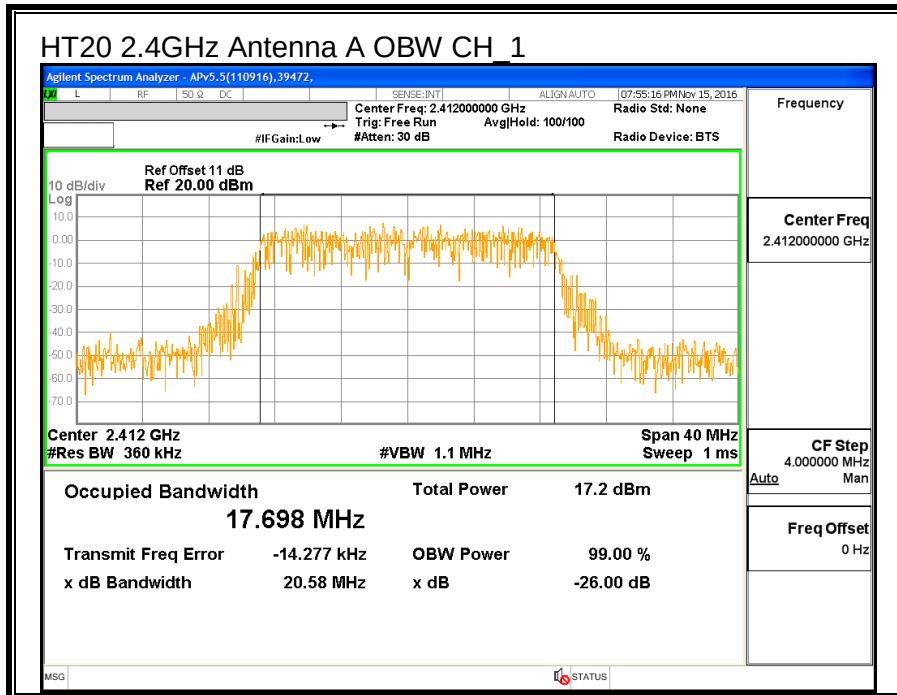

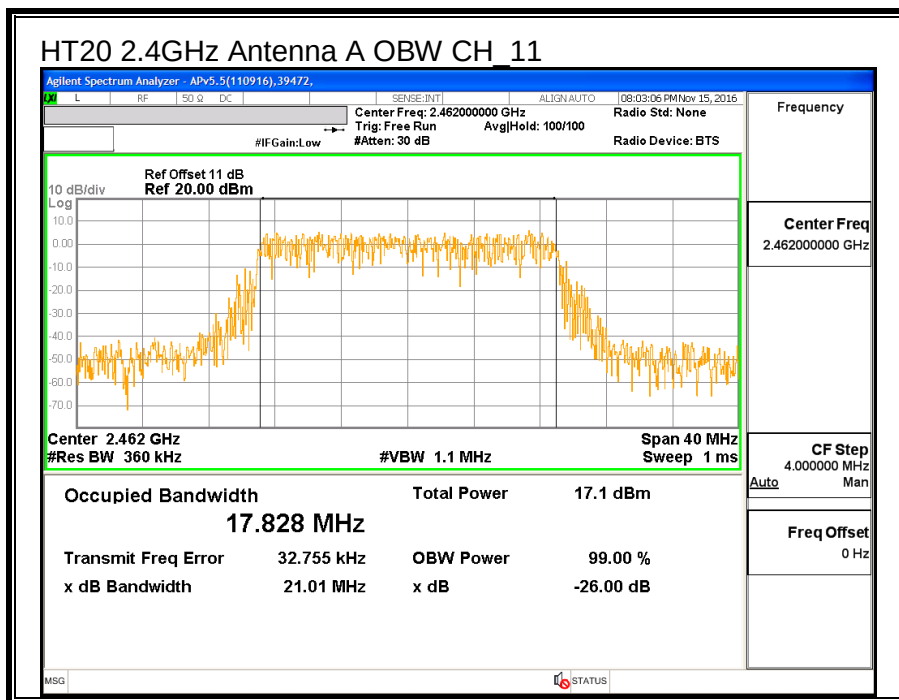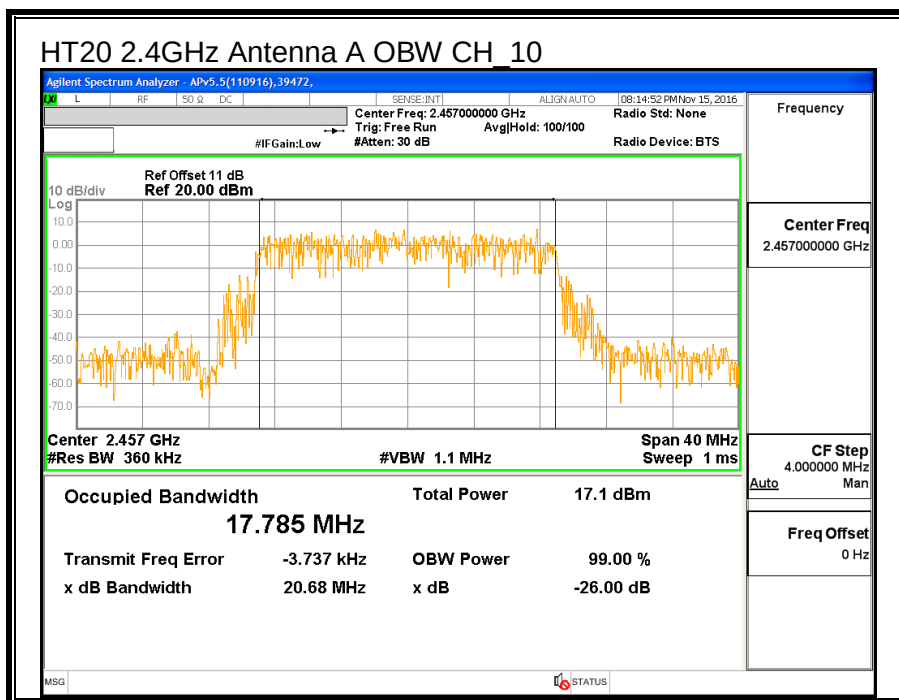

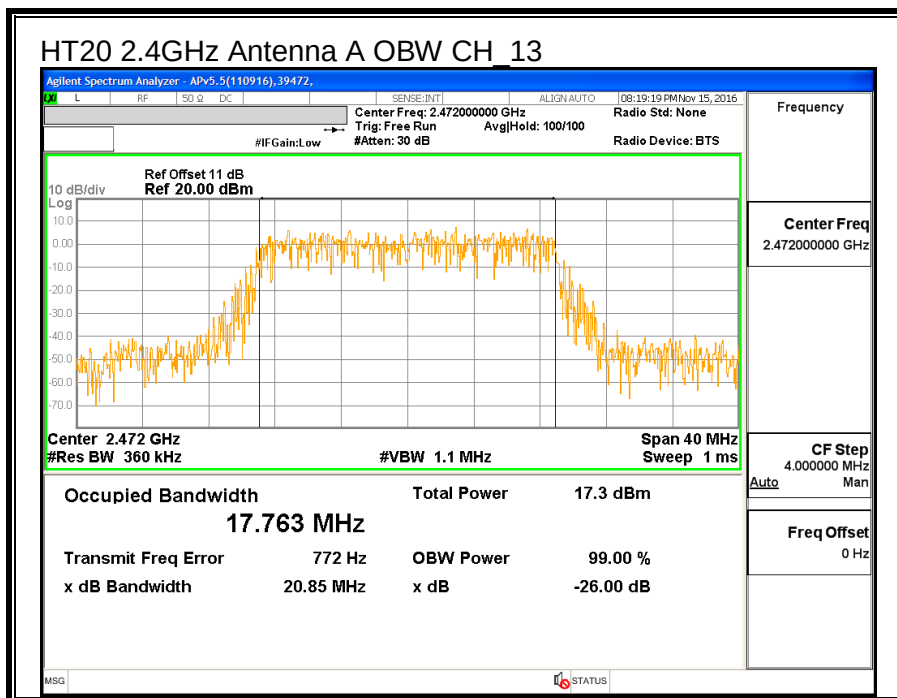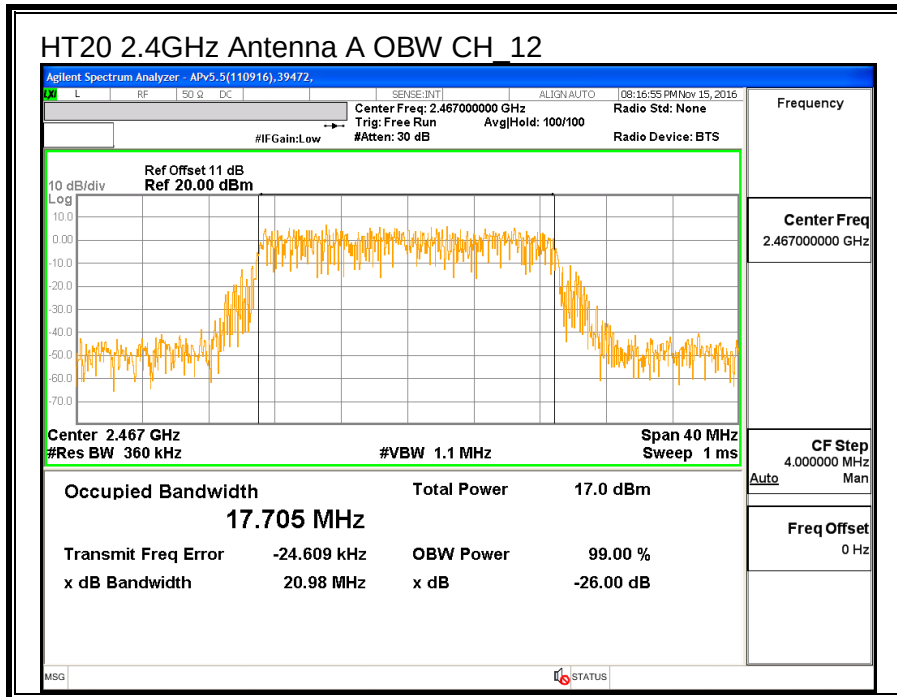

8.3.3. AVERAGE POWER

ID:	39472	Date:	12/19/2016
------------	-------	--------------	------------

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	Power Antenna A(MHz)
Low_1	2412	14.89
Middle_6	2437	16.00
High_10	2457	15.85
High_11	2462	13.32
High_12	2467	11.74
High_13	2472	3.82

8.3.4. OUTPUT POWER

ID:	39472	Date:	12/19/16
------------	-------	--------------	----------

LIMITS

FCC §15.247

IC RSS-247 (5.4) (4)

For systems using digital modulation in the 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Max Power (dBm)
Low_1	2412	1.91	30.00	30	36	30.00
Mid_6	2437	1.91	30.00	30	36	30.00
High_10	2457	1.91	30.00	30	36	30.00
High_11	2462	1.91	30.00	30	36	30.00
High_12	2467	1.91	30.00	30	36	30.00
High_13	2472	1.91	30.00	30	36	30.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power
--------------------	------	--

Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Margin (dB)
Low_1	2412	21.52	21.52	30.00	-8.48
Mid_6	2437	22.70	22.70	30.00	-7.30
High_10	2457	22.64	22.64	30.00	-7.36
High_11	2462	20.61	20.61	30.00	-9.39
High_12	2467	19.47	19.47	30.00	-10.53
High_13	2472	10.59	10.59	30.00	-19.41

8.3.5. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247

IC RSS-247 (5.2) (2)



For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 KHz band during any time interval of continuous transmissions.



RESULTS



Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

PSD Results

Channel	Frequency (MHz)	Antenna A Meas (dBm)	Total Corr'd PSD (dBm)	Limit (dBm)	Margin (dB)
Low_1	2412	-10.50	-10.50	8.0	-18.5
Mid_6	2437	-9.56	-9.56	8.0	-17.6
High_10	2457	-10.29	-10.29	8.0	-18.3
High_11	2462	-11.76	-11.76	8.0	-19.8
High_12	2467	-14.15	-14.15	8.0	-22.1
High_13	2472	-20.94	-20.94	8.0	-28.9

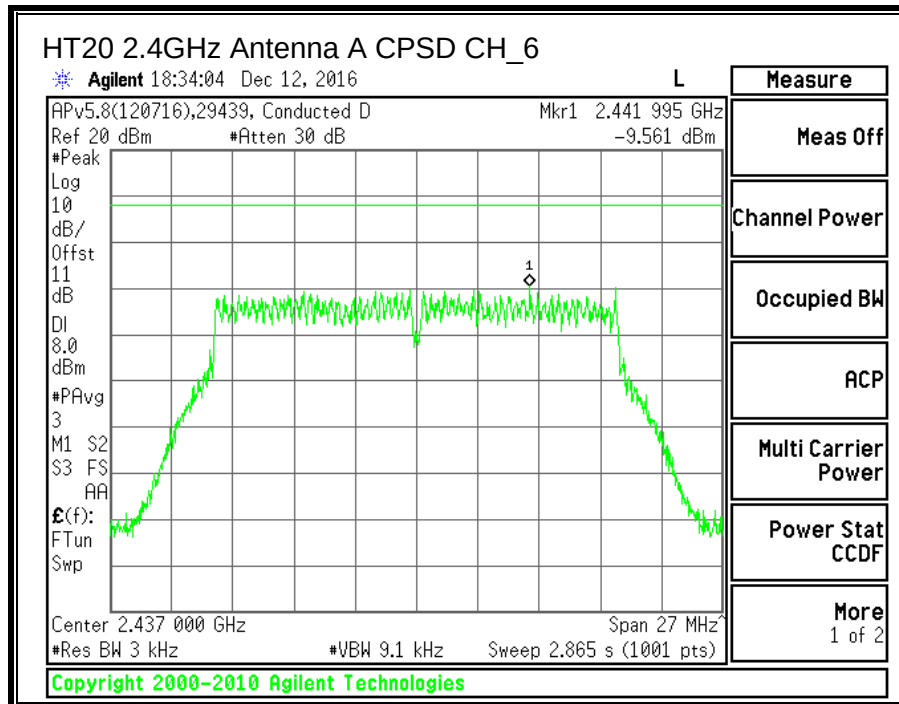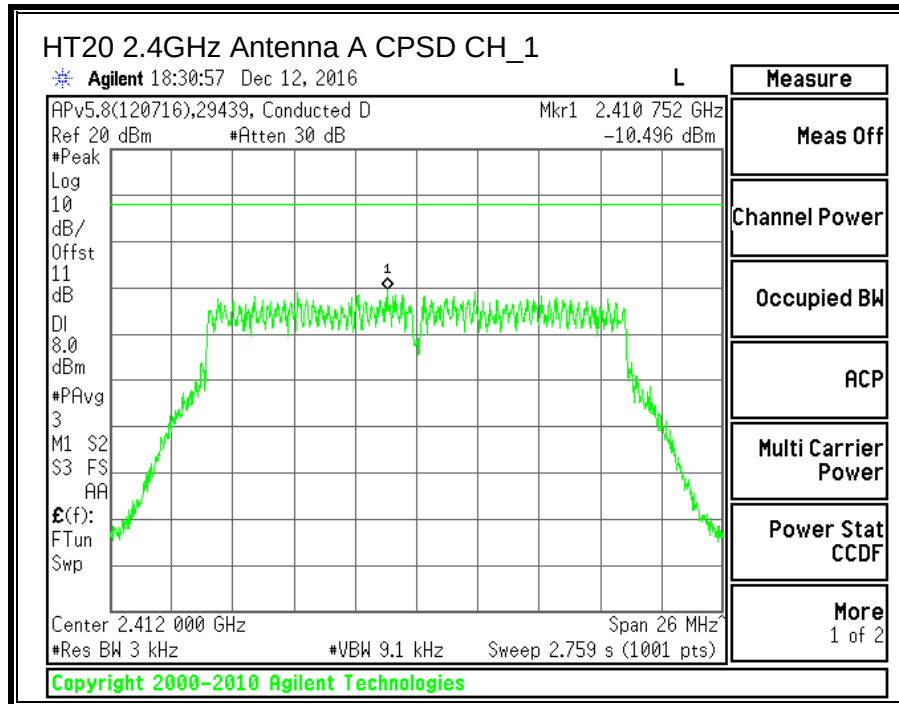

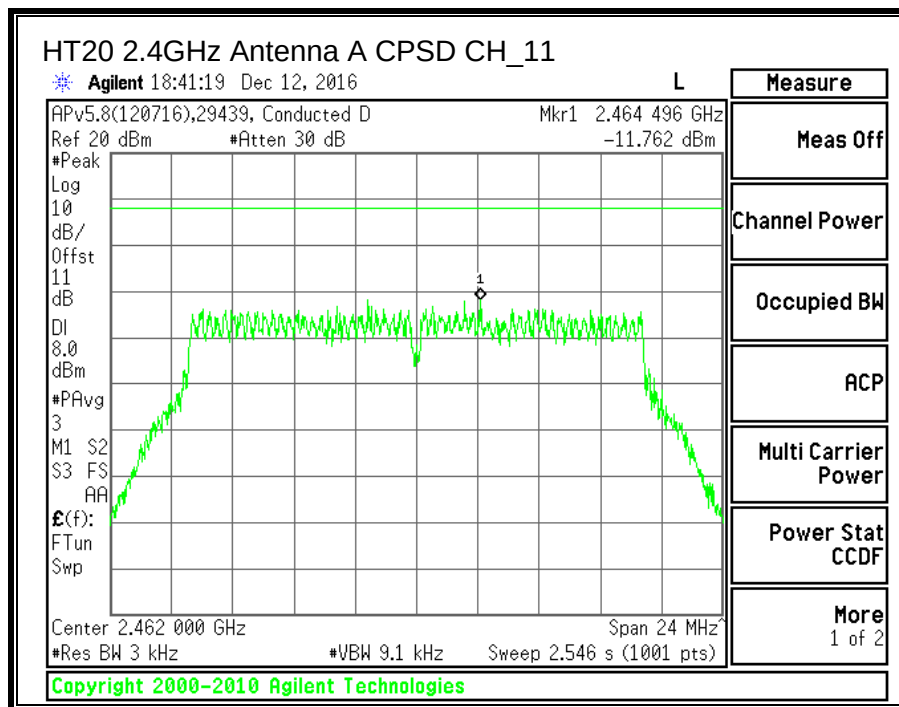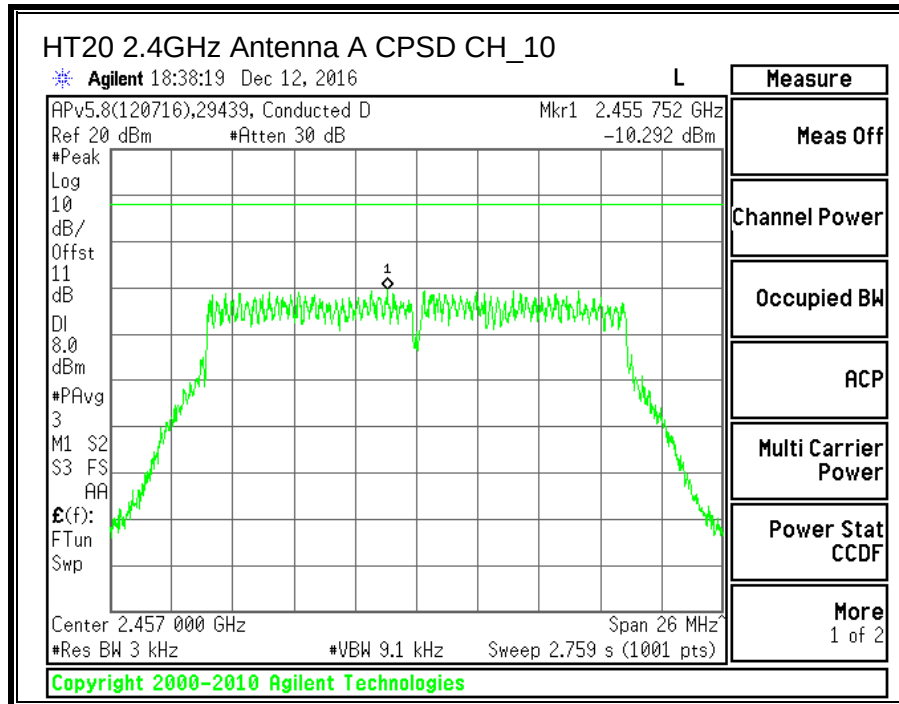

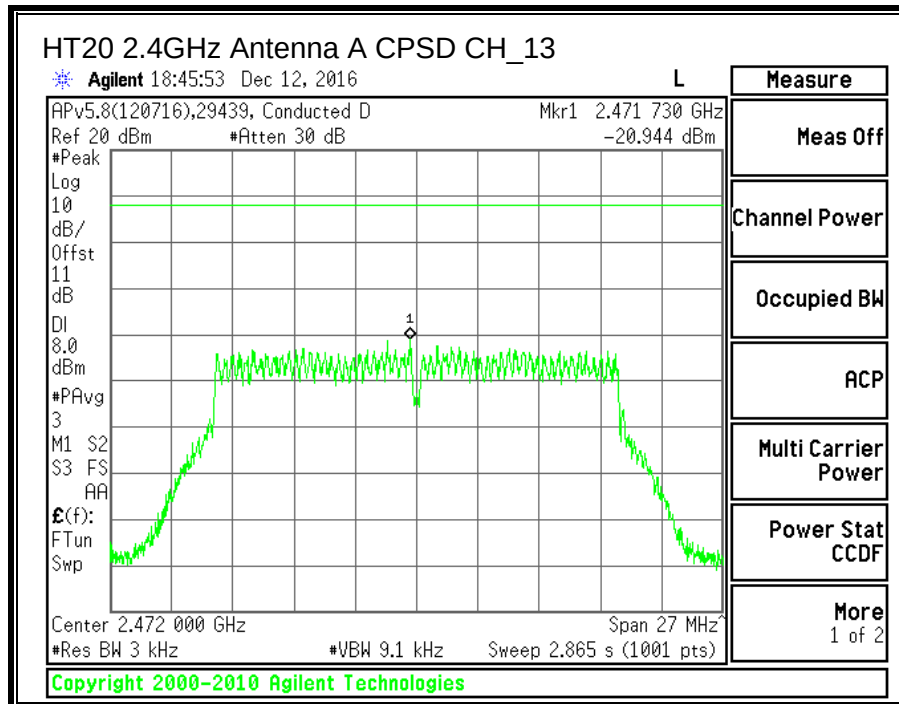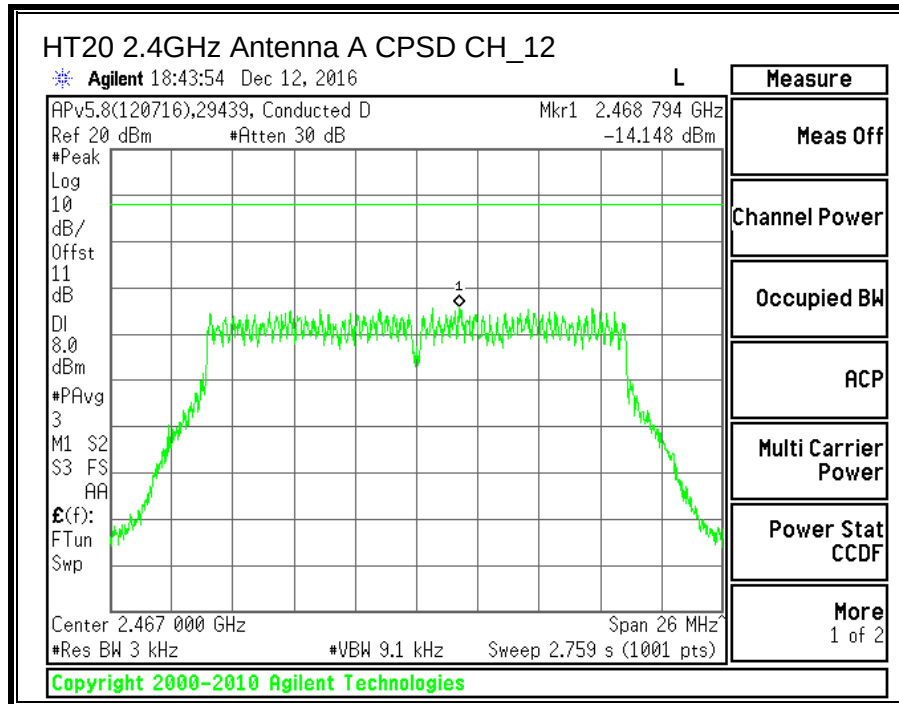



8.3.6. CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS



LIMITS



FCC §15.247 (d)



IC RSS-247 (5.5)


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

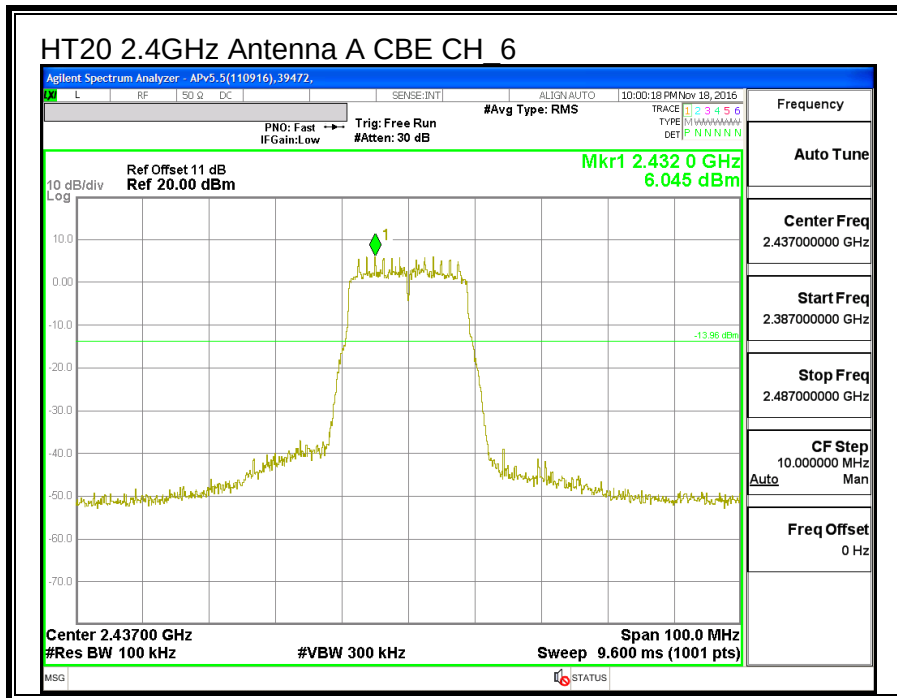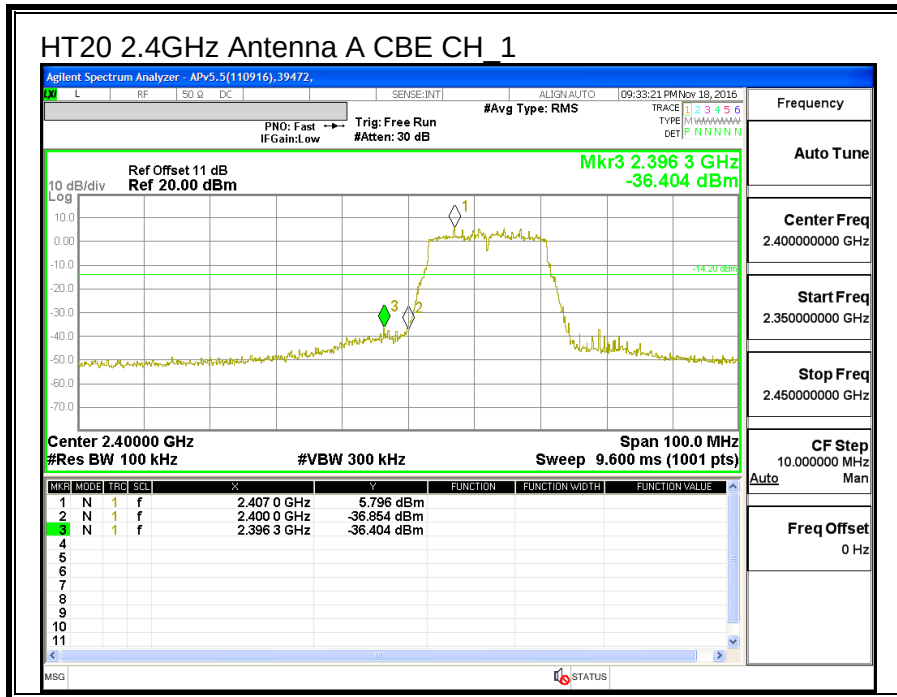

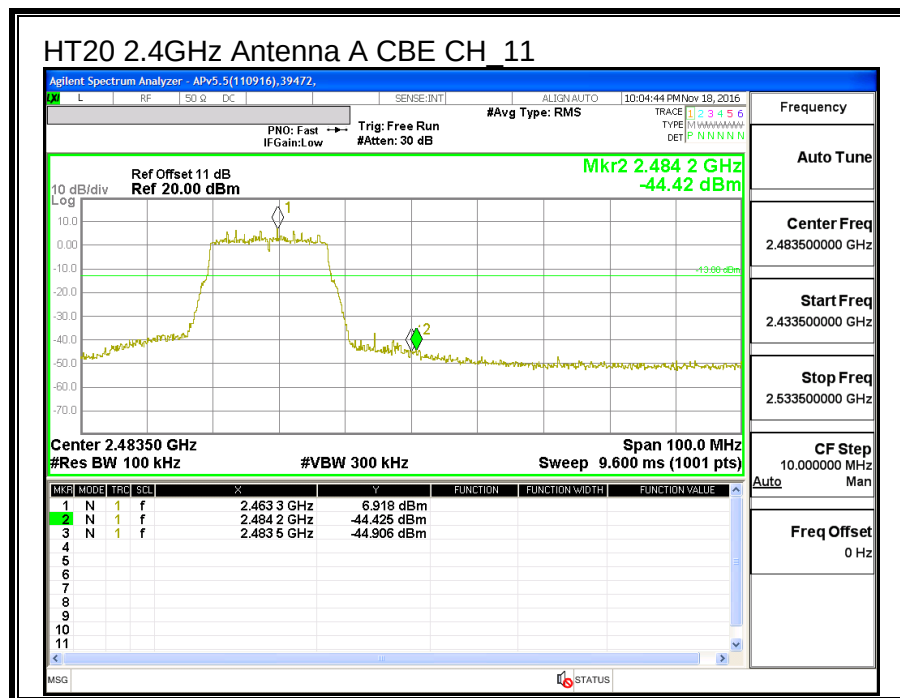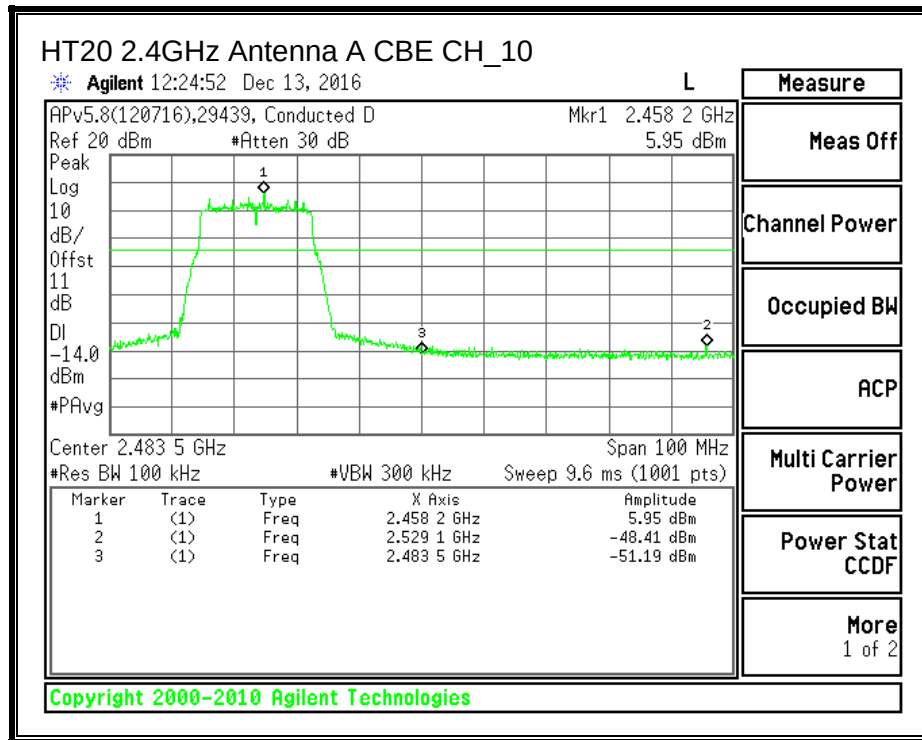

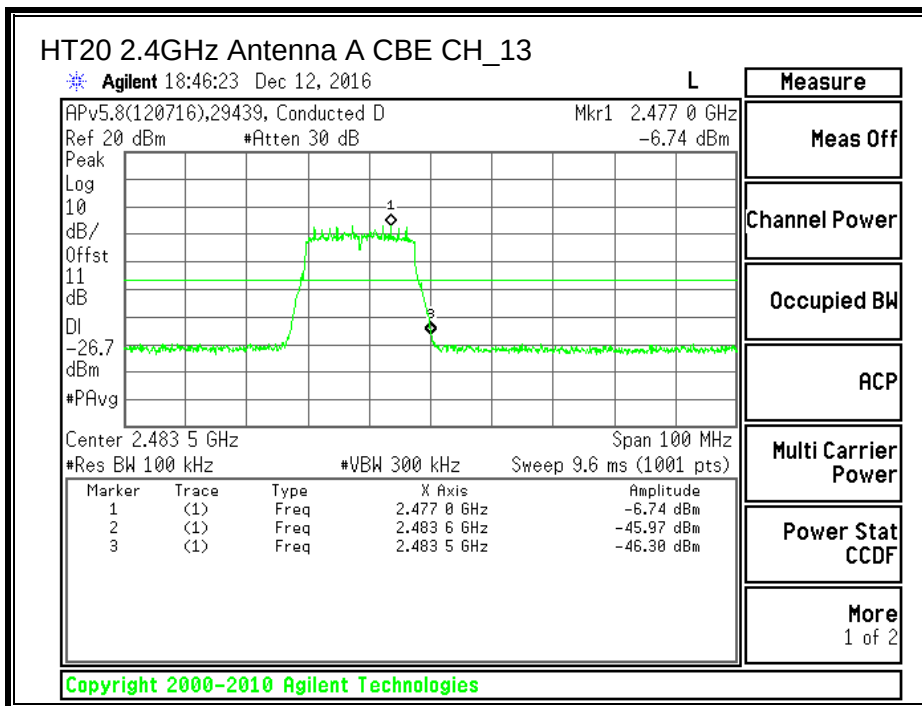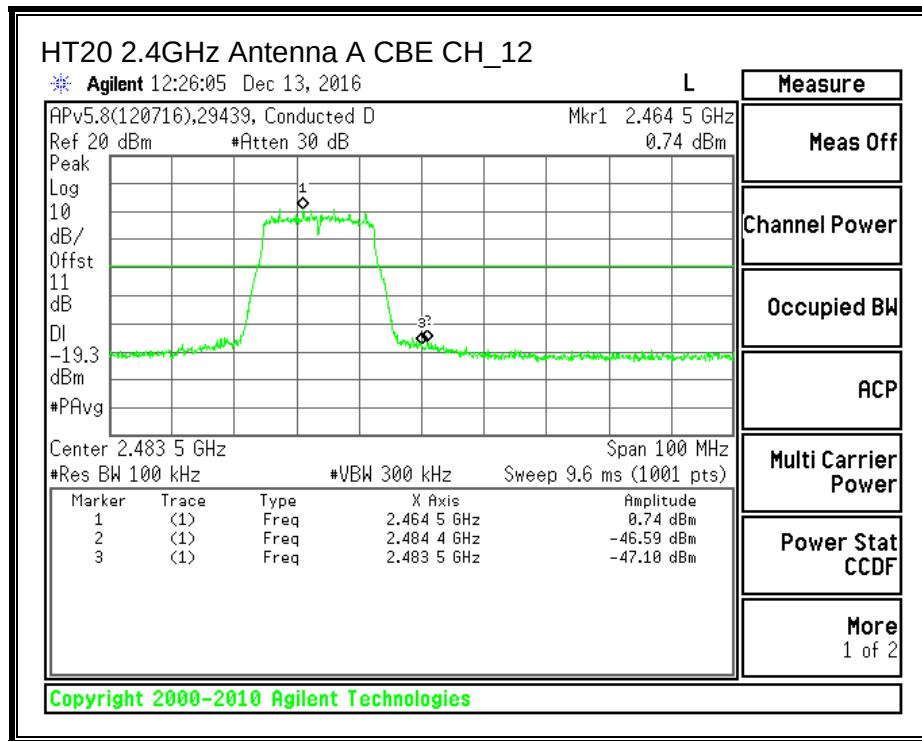

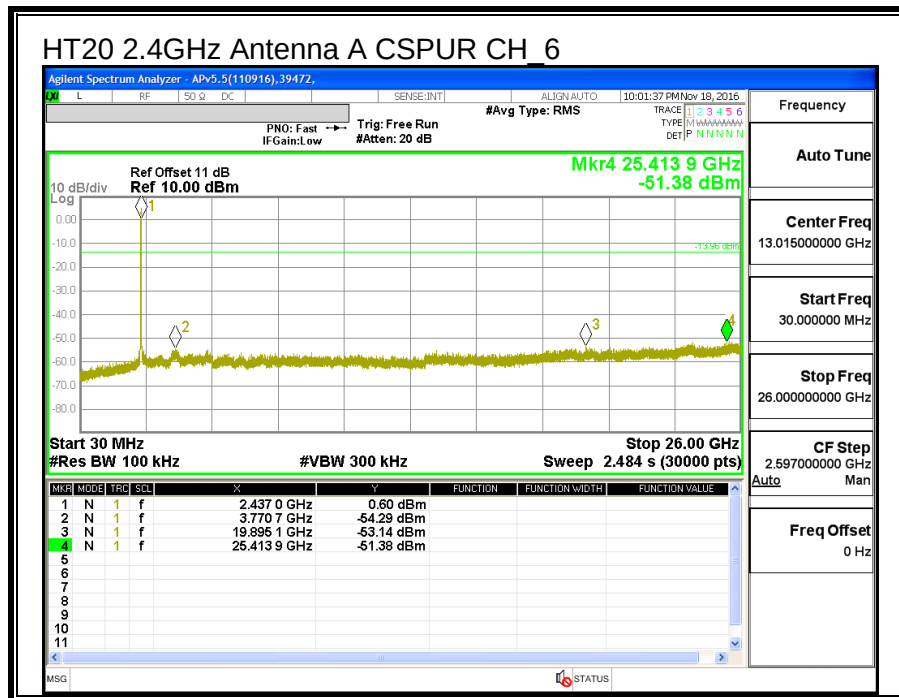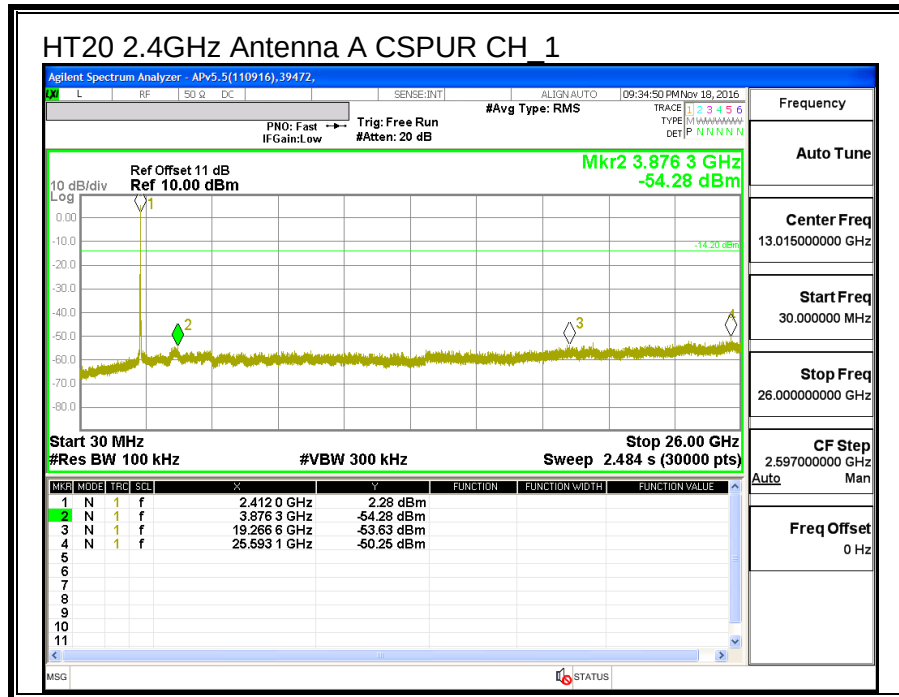

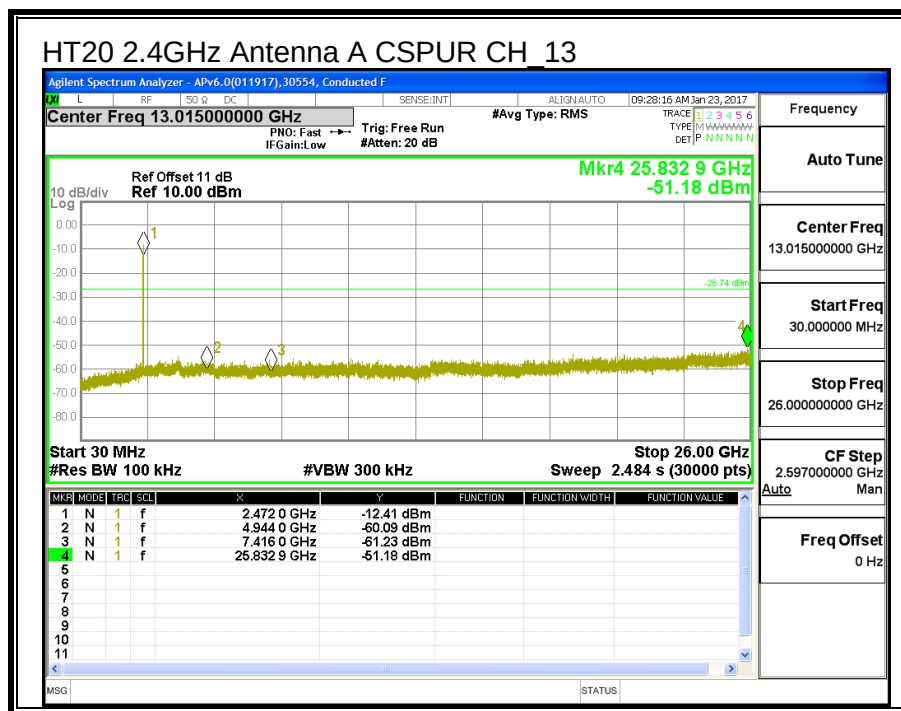

8.4. 11n HT20 Antenna B SISO MODE IN THE 2.4GHz BAND

8.4.1. 6 dB BANDWIDTH

LIMITS



FCC §15.247 (a) (2)



IC RSS-247 (5.2) (1)



The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS

Channel	Frequency (MHz)	6 dB BW Antenna B (MHz)	Minimum Limit (MHz)
Low_1	2412	16.880	0.5
Middle_6	2437	17.565	0.5
High_10	2457	17.565	0.5
High_11	2462	17.010	0.5
High_12	2467	17.540	0.5
High_13	2472	17.545	0.5

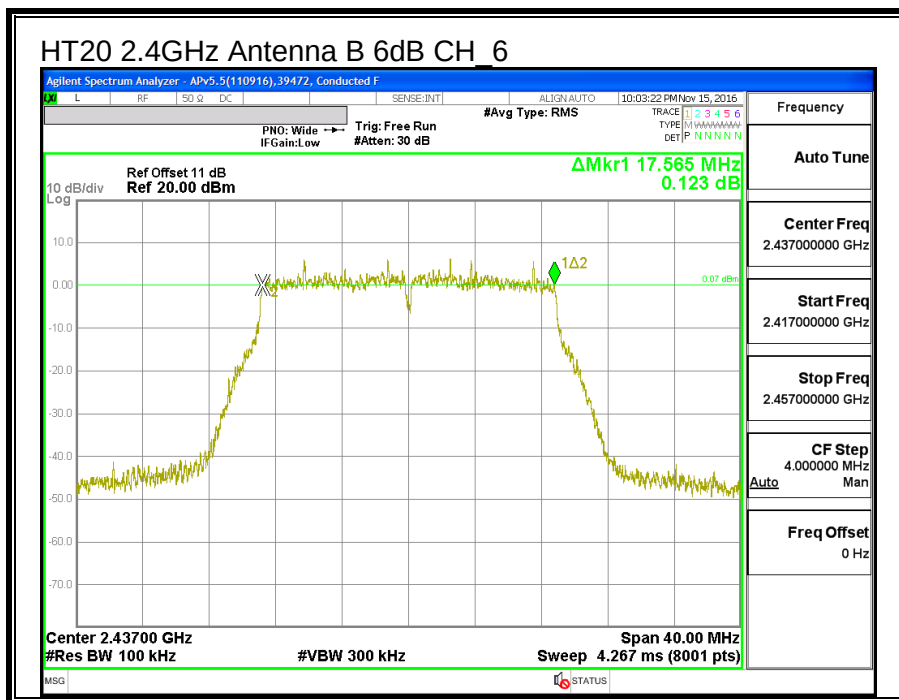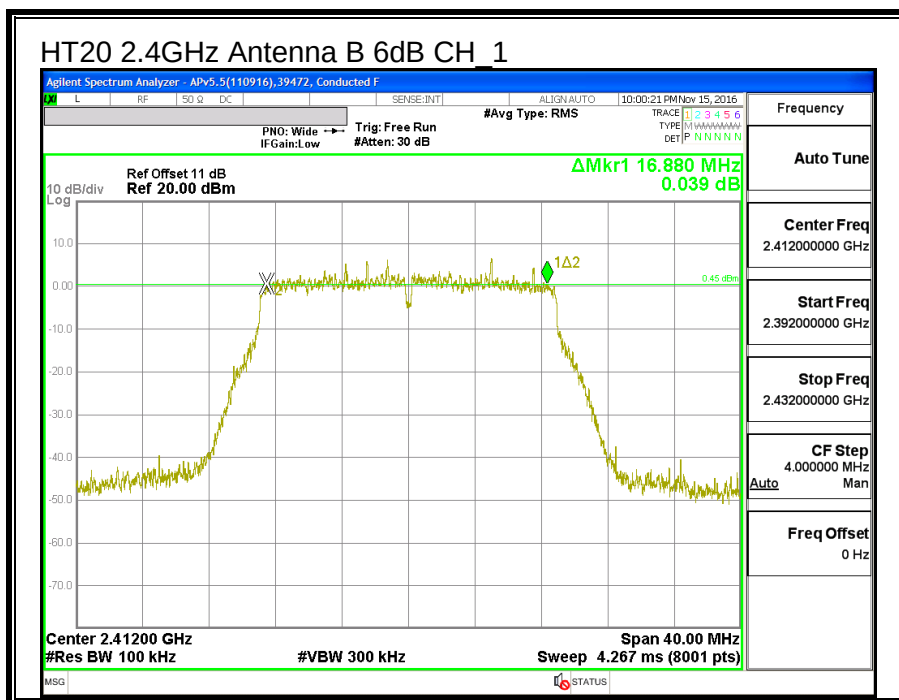

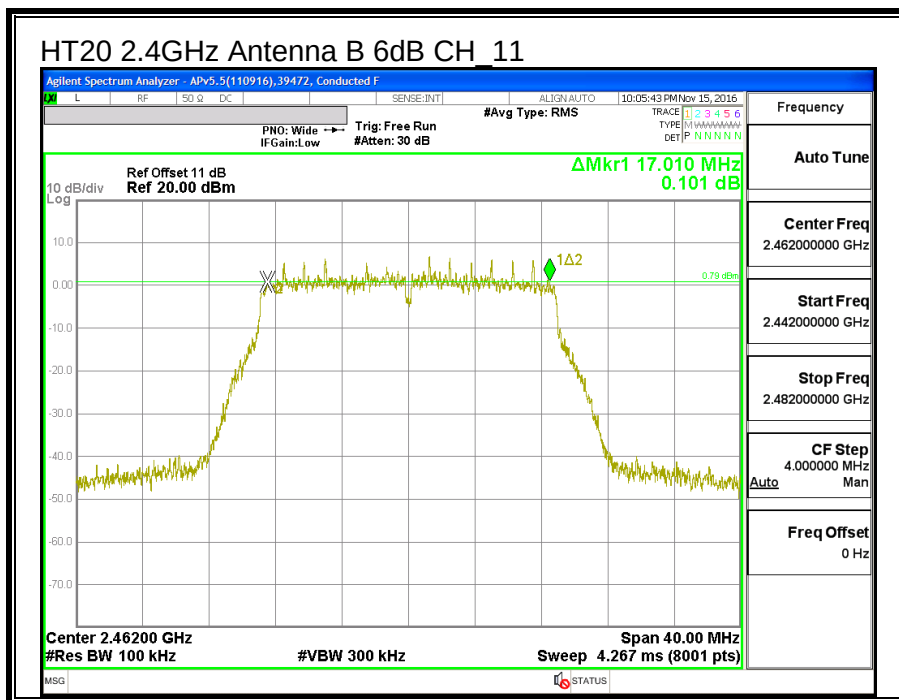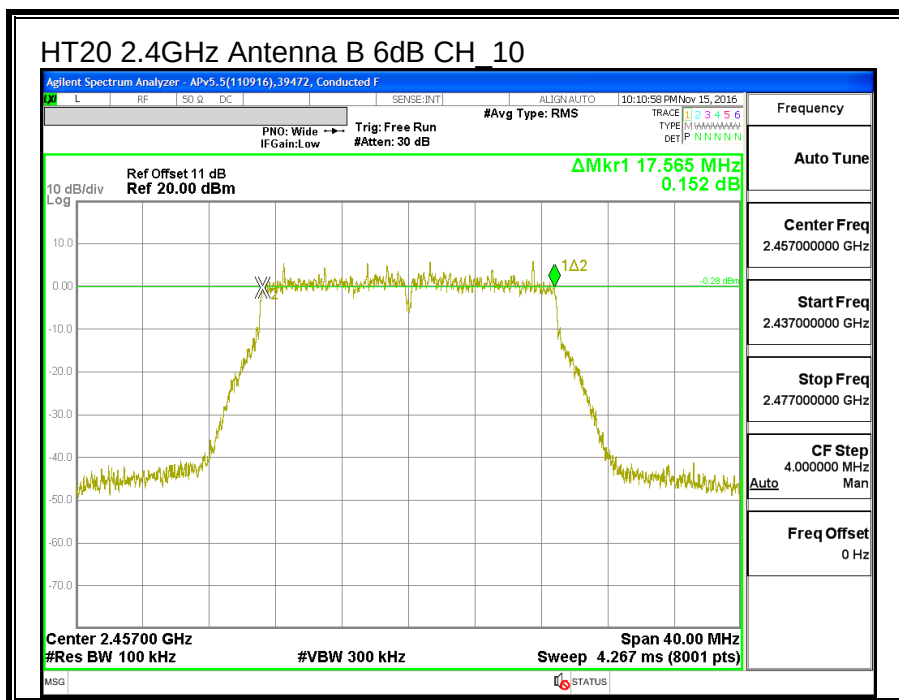

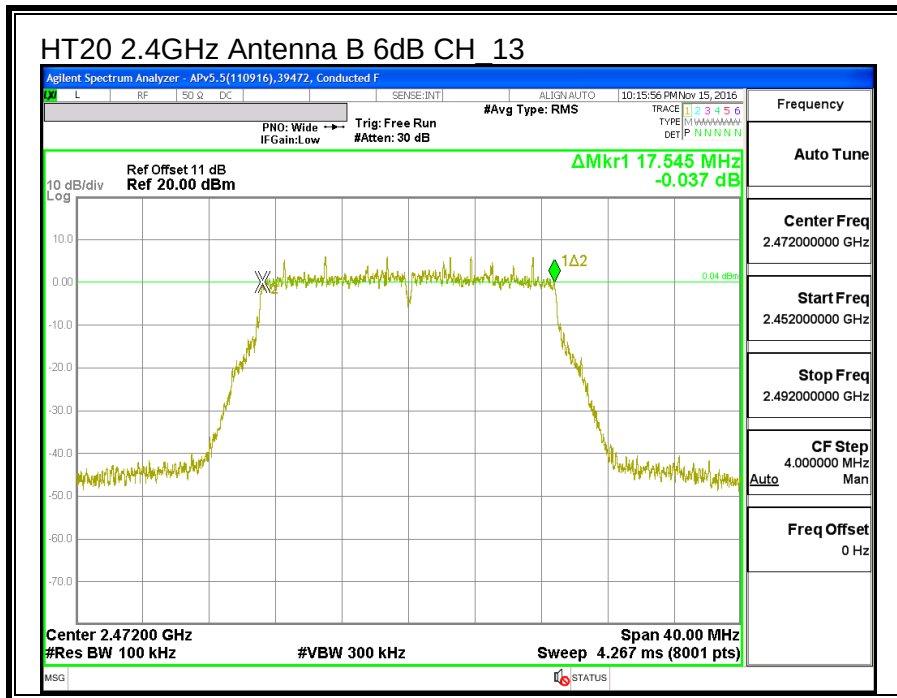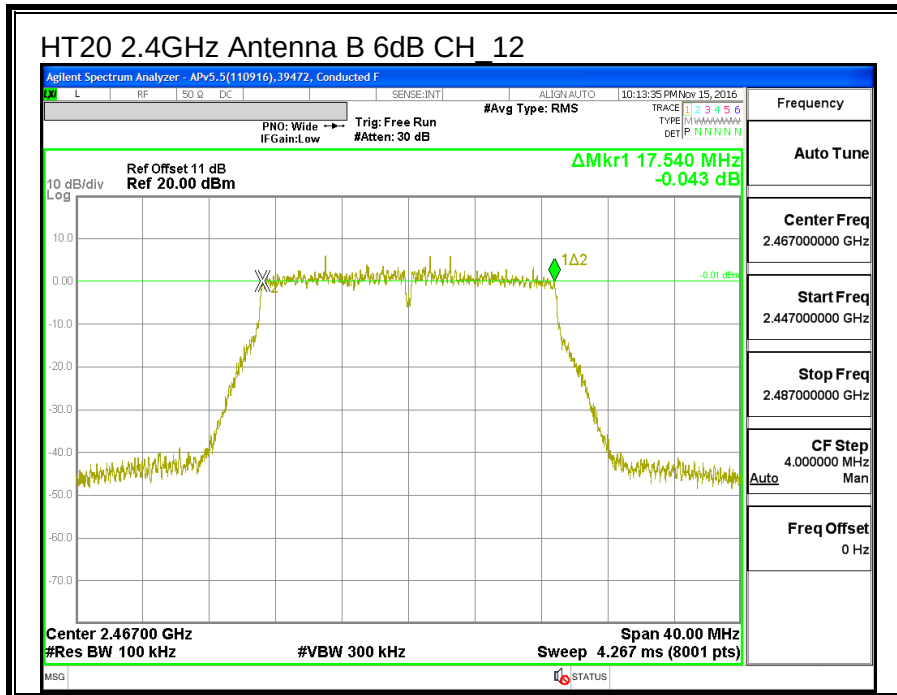



8.4.2. 99% BANDWIDTH



LIMITS



None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth Antenna B (MHz)
Low_1	2412	17.730
Middle_6	2437	17.783
High_10	2457	17.974
High_11	2462	17.765
High_12	2467	17.707
High_13	2472	17.713

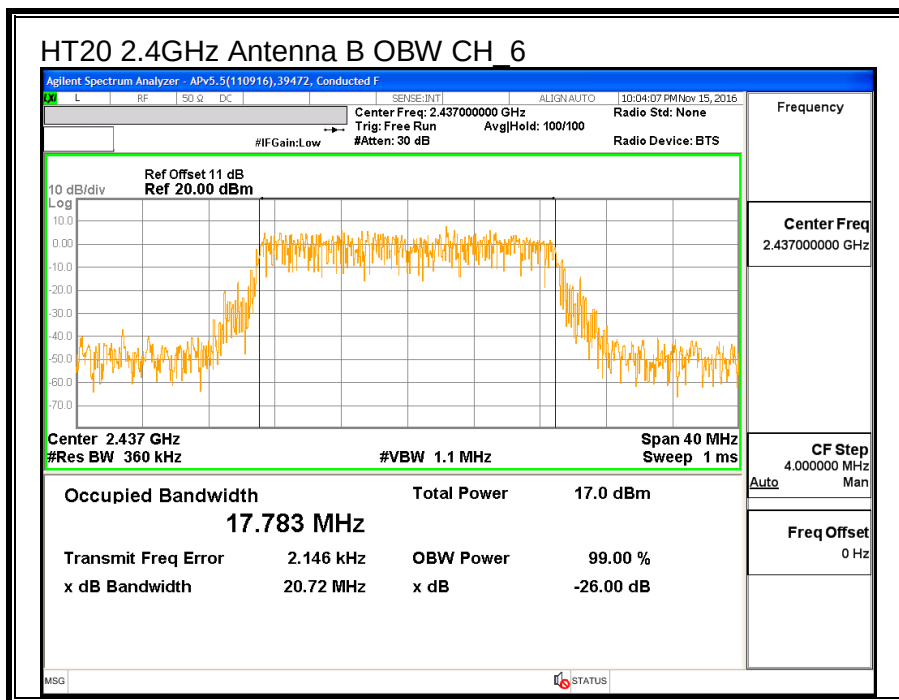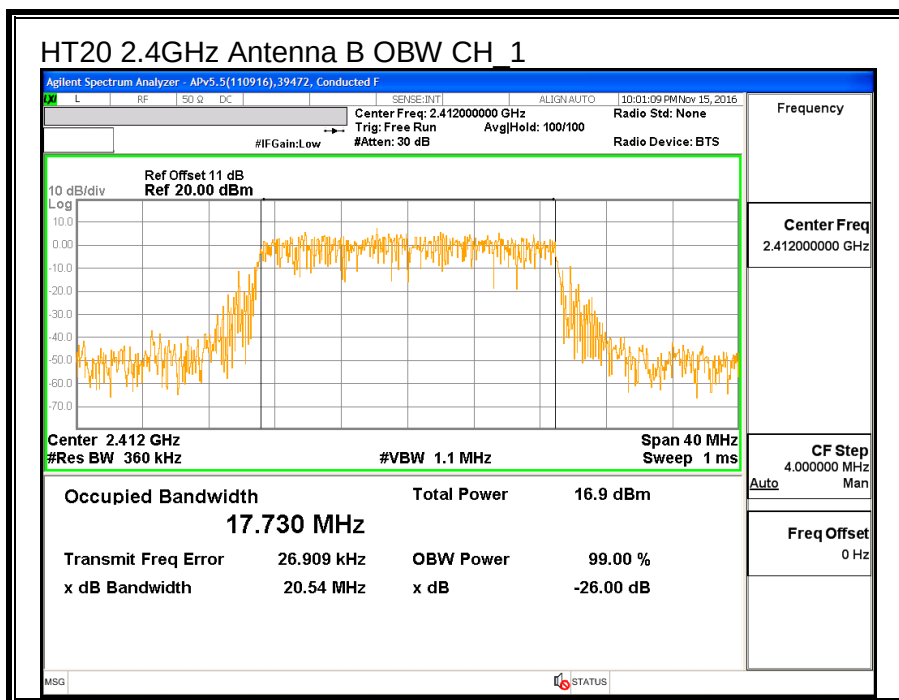

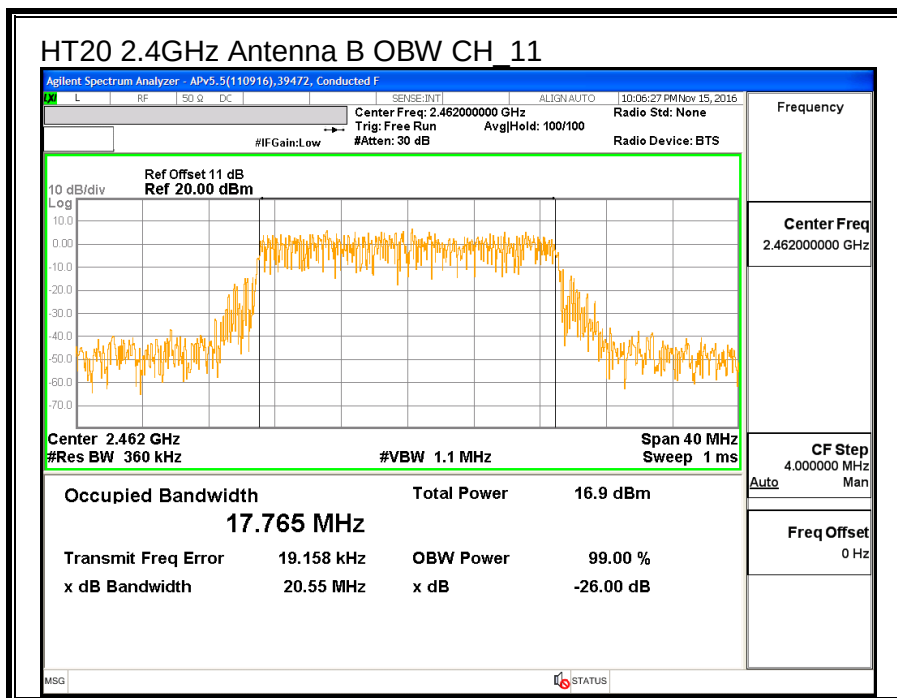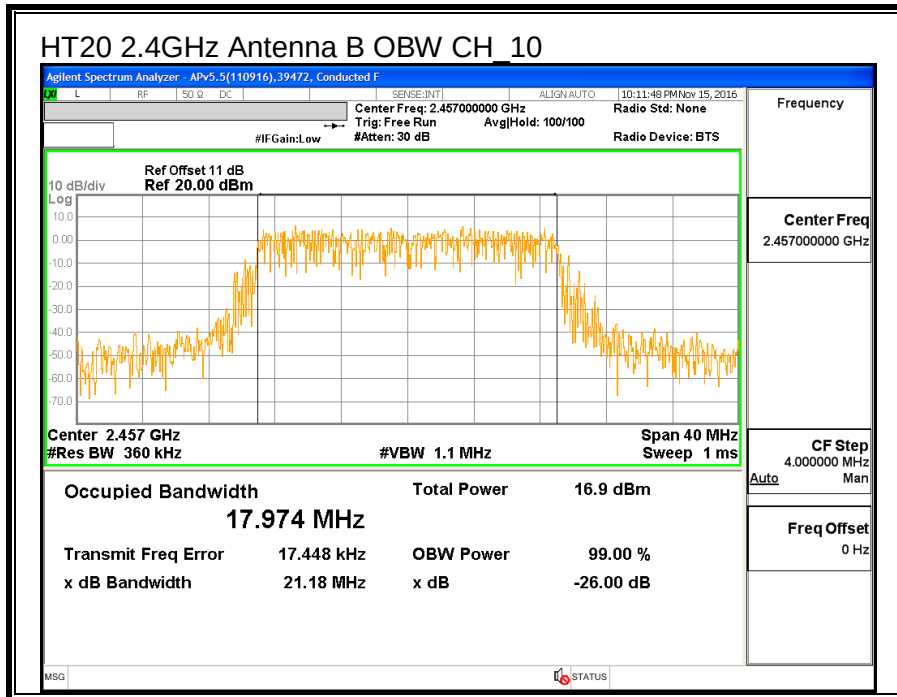

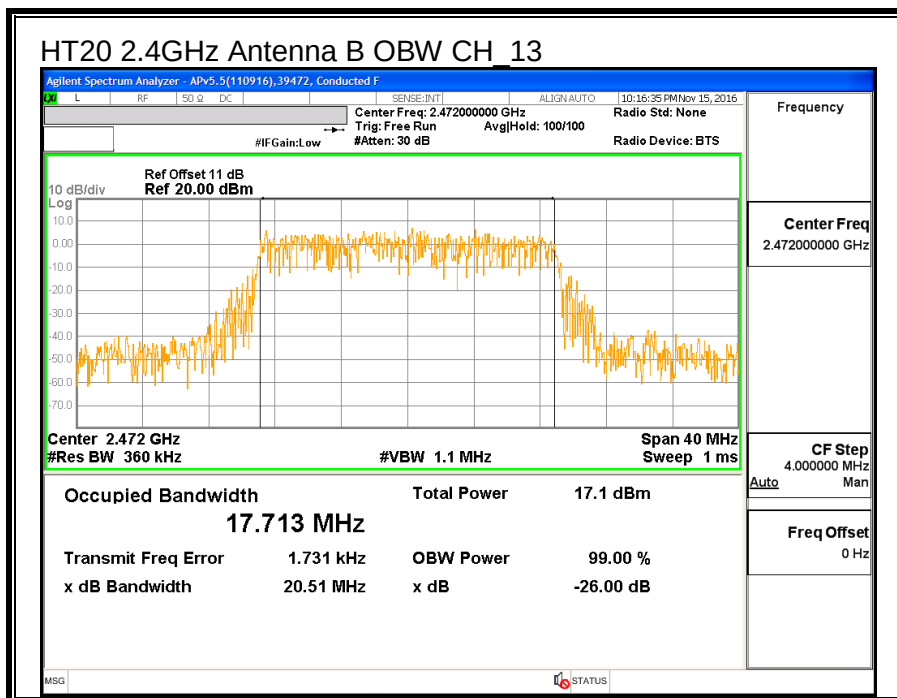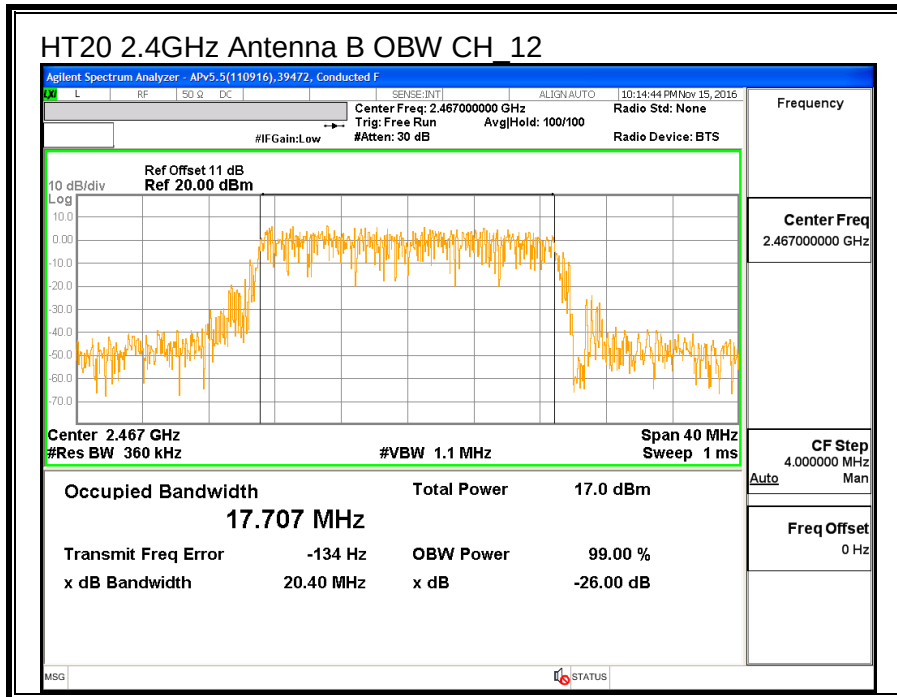

8.4.3. AVERAGE POWER

ID:	39472	Date:	12/19/2016
------------	-------	--------------	------------

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	Power Antenna B (MHz)
Low_1	2412	14.89
Middle_6	2437	15.23
High_10	2457	15.27
High_11	2462	13.41
High_12	2467	11.82
High_13	2472	3.86

8.4.4. OUTPUT POWER

ID:	39472	Date:	12/19/16
------------	-------	--------------	----------

LIMITS

FCC §15.247

IC RSS-247 (5.4) (4)

For systems using digital modulation in the 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Max Power (dBm)
Low_1	2412	0.56	30.00	30	36	30.00
Mid_6	2437	0.56	30.00	30	36	30.00
High_10	2457	0.56	30.00	30	36	30.00
High_11	2462	0.56	30.00	30	36	30.00
High_12	2467	0.56	30.00	30	36	30.00
High_13	2472	0.56	30.00	30	36	30.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power
--------------------	------	--

Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Margin (dB)
Low_1	2412	21.23	21.23	30.00	-8.77
Mid_6	2437	21.93	21.93	30.00	-8.07
High_10	2457	22.03	22.03	30.00	-7.97
High_11	2462	20.21	20.21	30.00	-9.79
High_12	2467	19.88	19.88	30.00	-10.12
High_13	2472	9.92	9.92	30.00	-20.08

8.4.5. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247

IC RSS-247 (5.2) (2)



For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 KHz band during any time interval of continuous transmissions.



RESULTS



Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

PSD Results

Channel	Frequency (MHz)	Antenna B Meas (dBm)	Total Corr'd PSD (dBm)	Limit (dBm)	Margin (dB)
Low_1	2412	-11.22	-11.22	8.0	-19.2
Mid_6	2437	-9.86	-9.86	8.0	-17.9
High_10	2457	-10.44	-10.44	8.0	-18.4
High_11	2462	-12.66	-12.66	8.0	-20.7
High_12	2467	-13.92	-13.92	8.0	-21.9
High_13	2472	-20.79	-20.79	8.0	-28.8

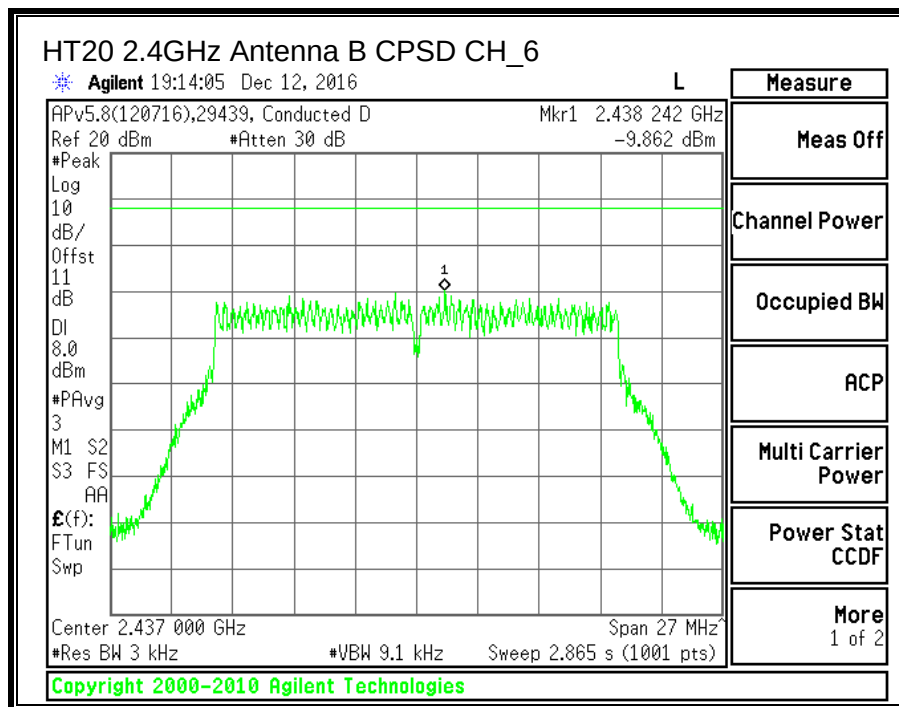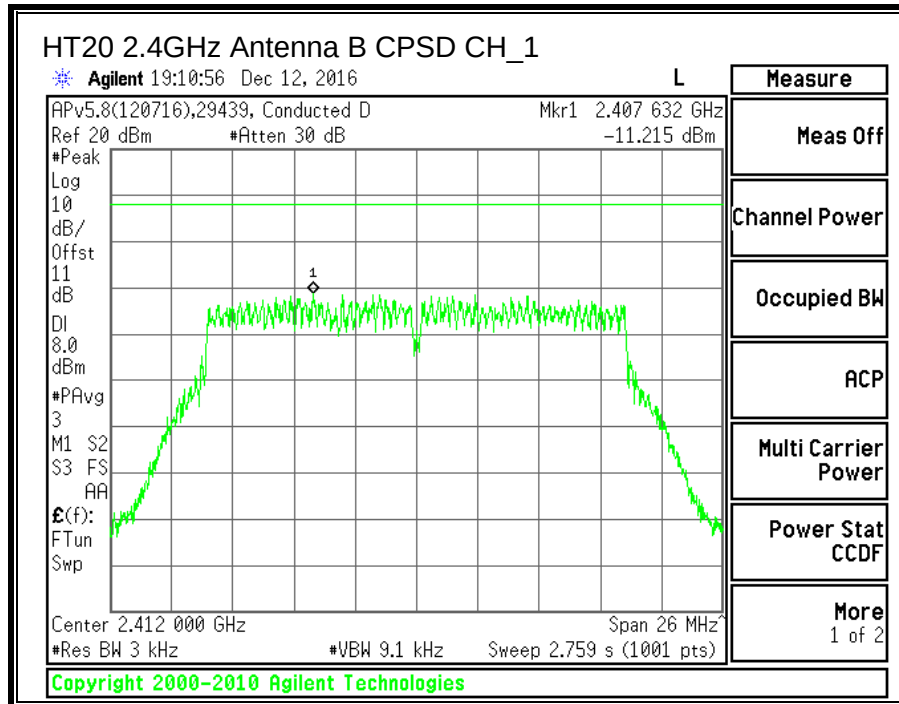

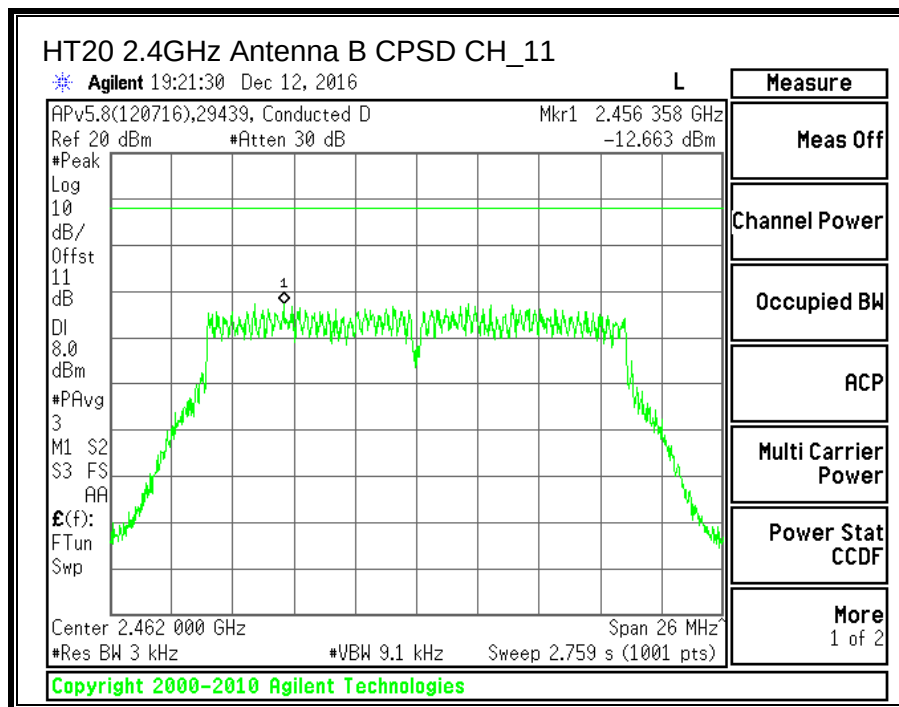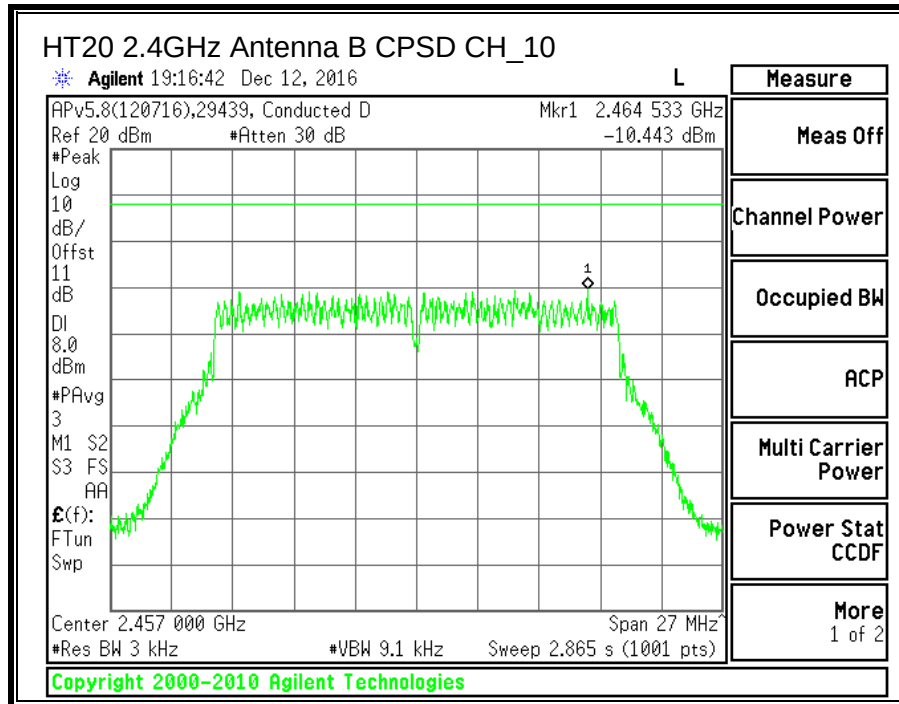

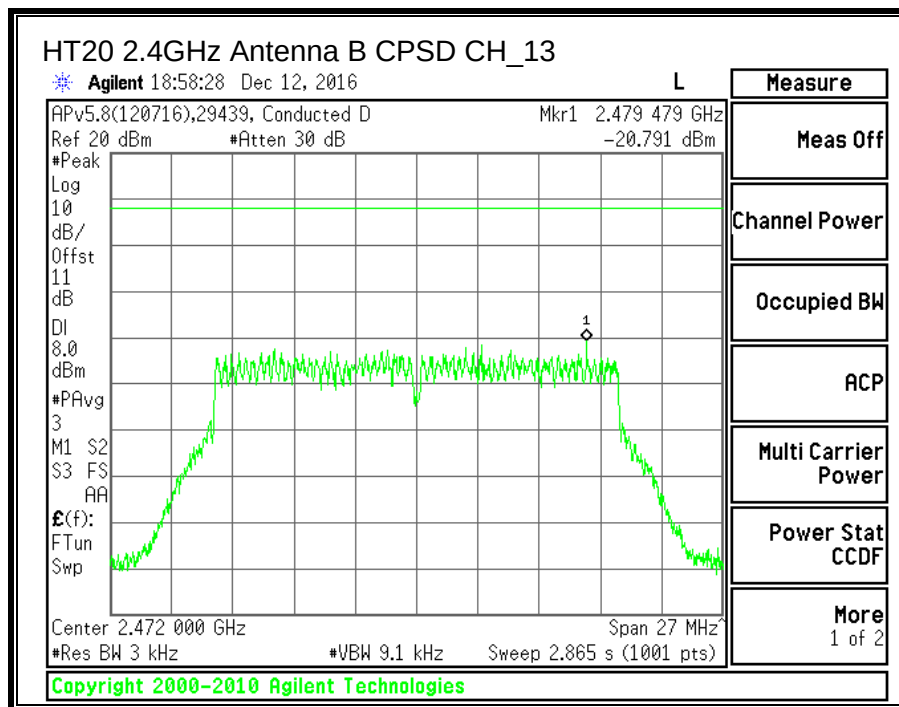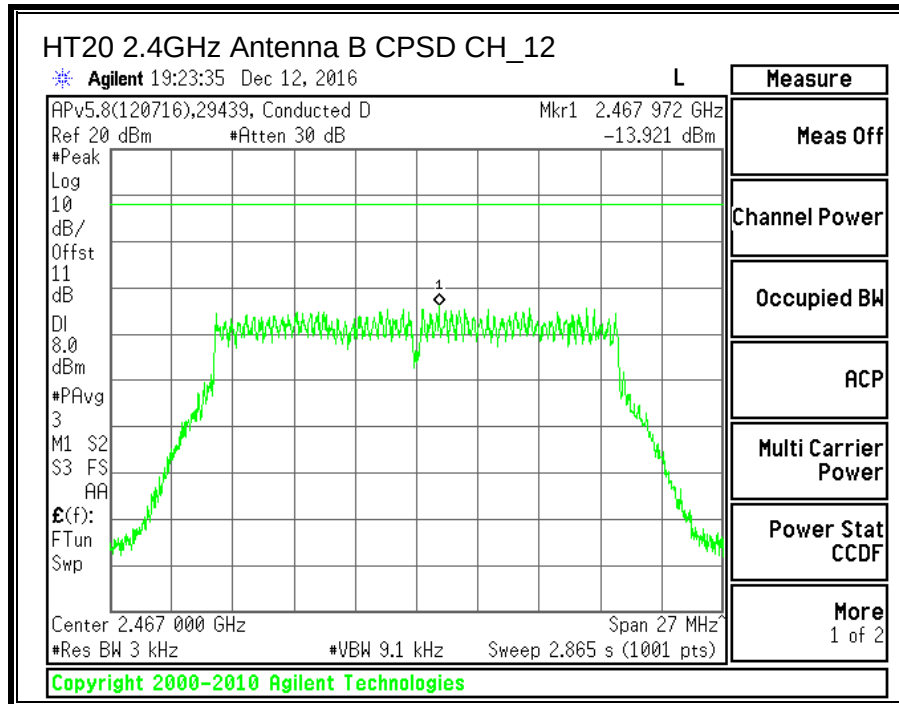

8.4.6. CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-247 (5.5)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

