CERTIFICATION TEST REPORT

Report Number. : 16U23813-E4V5

Applicant	:	APPLE, INC. 1 INFINITE LOOP CUPERTINO, CA 95014, U.S.A
Model	:	A1822
FCC ID	:	BCGA1822
EUT Description	:	TABLET DEVICE
Test Standard	:	FCC 47 CFR PART 15 SUBPART E

Date Of Issue:
February 15, 2017

Prepared by:
UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888

NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
V1	01/24/2017	Initial Issue	Chin Pang
V2	02/06/2017	Remove IC Data	Francisco Guarnero
V3	02/08/2017	TCB Revision	Francisco Guarnero
V4	02/10/2017	Address TCB's questions	Chin Pang
V5	02/15/2017	Address TCB's questions	Devin Chang

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS 12

2. TEST METHODOLOGY 13

3. FACILITIES AND ACCREDITATION 13

4. CALIBRATION AND UNCERTAINTY 14

4.1. MEASURING INSTRUMENT CALIBRATION 14

4.2. SAMPLE CALCULATION 14

4.3. MEASUREMENT UNCERTAINTY 14

5. EQUIPMENT UNDER TEST 15

5.1. DESCRIPTION OF EUT 15

5.2. MAXIMUM OUTPUT POWER 15

5.3. DESCRIPTION OF AVAILABLE ANTENNAS 18

5.4. SOFTWARE AND FIRMWARE 18

5.5. WORST-CASE CONFIGURATION AND MODE 19

5.6. DESCRIPTION OF TEST SETUP 20

6. TEST AND MEASUREMENT EQUIPMENT 26

7. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS 27

7.1. ON TIME AND DUTY CYCLE 27

7.2. MEASUREMENT METHODS 31

8. ANTENNA PORT TEST RESULTS 32

8.1. 802.11n HT20 ANTENNA A MODE IN THE 5.2 GHz BAND 32

8.1.1. 26 dB BANDWIDTH 32
8.1.2. 99% BANDWIDTH 35
8.1.3. AVERAGE POWER 38
8.1.4. OUTPUT POWER AND PSD 39

8.2. 802.11n HT20 ANTENNA B MODE IN THE 5.2 GHz BAND 43

8.2.1. 26 dB BANDWIDTH 43
8.2.2. 99% BANDWIDTH 46
8.2.3. AVERAGE POWER 49
8.2.4. OUTPUT POWER AND PSD 50

8.3. 802.11n HT20 2Tx (ANTENNA A + ANTENNA B) CDD MODE IN THE 5.2 GHz BAND 54

8.3.1. 26 dB BANDWIDTH 54
8.3.2. 99% BANDWIDTH 58
8.3.3. AVERAGE POWER 62
8.3.4. OUTPUT POWER AND PSD 63

8.4. 802.11n HT20 2Tx (ANTENNA A + ANTENNA B) STBC MODE IN THE 5.2 GHz BAND 69

8.5. 802.11n HT40 ANTENNA A MODE IN THE 5.2 GHz BAND 70

8.5.1. 26 dB BANDWIDTH 70

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.5.2. 99% BANDWIDTH 72
8.5.3. AVERAGE POWER 74
8.5.4. OUTPUT POWER AND PSD 75

8.6. 802.11n HT40 ANTENNA B MODE IN THE 5.2 GHz BAND 78
8.6.1. 26 dB BANDWIDTH 78
8.6.2. 99% BANDWIDTH 80
8.6.3. AVERAGE POWER 82
8.6.4. OUTPUT POWER AND PSD 83

8.7. 802.11n HT40 2Tx (ANTENNA A + ANTENNA B) CDD MODE IN THE 5.2 GHz BAND 86
8.7.1. 26 dB BANDWIDTH 86
8.7.2. 99% BANDWIDTH 89
8.7.3. AVERAGE POWER 92
8.7.4. OUTPUT POWER AND PSD 93

8.8. 802.11n HT40 2Tx (ANTENNA A + ANTENNA B) STBC MODE IN THE 5.2 GHz BAND 98

8.9. 802.11ac VHT80 ANTENNA A MODE IN THE 5.2 GHz BAND 99
8.9.1. 26 dB BANDWIDTH 99
8.9.2. 99% BANDWIDTH 100
8.9.3. AVERAGE POWER 101
8.9.4. OUTPUT POWER AND PSD 102

8.10. 802.11ac VHT80 ANTENNA B MODE IN THE 5.2 GHz BAND 105
8.10.1. 26 dB BANDWIDTH 105
8.10.2. 99% BANDWIDTH 106
8.10.3. AVERAGE POWER 107
8.10.4. OUTPUT POWER AND PSD 108

8.11. 802.11ac VHT80 2Tx (ANTENNA A + ANTENNA B) CDD MODE IN THE 5.2 GHz BAND 111
8.11.1. 26 dB BANDWIDTH 111
8.11.2. 99% BANDWIDTH 113
8.11.3. AVERAGE POWER 115
8.11.4. OUTPUT POWER AND PSD 116

8.12. 802.11ac VHT80 2Tx (ANTENNA A + ANTENNA B) STBC MODE IN THE 5.2 GHz BAND 120

8.13. 802.11n HT20 ANTENNA A MODE IN THE 5.3 GHz BAND 121
8.13.1. 26 dB BANDWIDTH 121
8.13.2. 99% BANDWIDTH 124
8.13.3. AVERAGE POWER 127
8.13.4. OUTPUT POWER AND PSD 128

8.14. 802.11n HT20 ANTENNA B MODE IN THE 5.3 GHz BAND 132
8.14.1. 26 dB BANDWIDTH 132
8.14.2. 99% BANDWIDTH 135
8.14.3. AVERAGE POWER 138
8.14.4. OUTPUT POWER AND PSD 139

8.15. 802.11n HT20 2Tx (ANTENNA A + ANTENNA B) CDD MODE IN THE 5.3 GHz BAND . 143
8.15.1. 26 dB BANDWIDTH 143
8.15.2. 99% BANDWIDTH 147
8.15.3. AVERAGE POWER 151
8.15.4. OUTPUT POWER AND PSD 152

8.16. 802.11n HT20 2Tx (ANTENNA A + ANTENNA B) STBC MODE IN THE 5.3 GHz BAND 157

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.16.1. 26 dB BANDWIDTH 157
8.16.2. 99% BANDWIDTH 161
8.16.3. AVERAGE POWER 165
8.16.4. OUTPUT POWER AND PSD 166

8.17. 802.11n HT40 ANTENNA A MODE IN THE 5.3 GHz BAND 171
8.17.1. 26 dB BANDWIDTH 171
8.17.2. 99% BANDWIDTH 173
8.17.3. AVERAGE POWER 175
8.17.4. OUTPUT POWER AND PSD 176

8.18. 802.11n HT40 ANTENNA B MODE IN THE 5.3 GHz BAND 179
8.18.1. 26 dB BANDWIDTH 179
8.18.2. 99% BANDWIDTH 181
8.18.3. AVERAGE POWER 183
8.18.4. OUTPUT POWER AND PSD 184

8.19. 802.11n HT40 2Tx (ANTENNA A + ANTENNA B) CDD MODE IN THE 5.3 GHz BAND . 187
8.19.1. 26 dB BANDWIDTH 187
8.19.2. 99% BANDWIDTH 190
8.19.3. AVERAGE POWER 193
8.19.4. OUTPUT POWER AND PSD 194

8.20. 802.11n HT40 2Tx (ANTENNA A + ANTENNA B) STBC MODE IN THE 5.3 GHz BAND 198

8.21. 802.11ac VHT80 ANTENNA A MODE IN THE 5.3 GHz BAND 199
8.21.1. 26 dB BANDWIDTH 199
8.21.2. 99% BANDWIDTH 200
8.21.3. AVERAGE POWER 201
8.21.4. OUTPUT POWER AND PSD 202

8.22. 802.11ac VHT80 ANTENNA B MODE IN THE 5.3 GHz BAND 205
8.22.1. 26 dB BANDWIDTH 205
8.22.2. 99% BANDWIDTH 206
8.22.3. AVERAGE POWER 207
8.22.4. OUTPUT POWER AND PSD 208

8.23. 802.11ac VHT80 2Tx (ANTENNA A + ANTENNA B) CDD MODE IN THE 5.3 GHz BAND 211
8.23.1. 26 dB BANDWIDTH 211
8.23.2. 99% BANDWIDTH 213
8.23.3. AVERAGE POWER 215
8.23.4. OUTPUT POWER AND PSD 216

8.24. 802.11ac VHT80 2Tx (ANTENNA A + ANTENNA B) STBC MODE IN THE 5.3 GHz BAND 219

8.25. 802.11n HT20 ANTENNA A MODE IN THE 5.6 GHz BAND 220
8.25.1. 26 dB BANDWIDTH 220
8.25.2. 99% BANDWIDTH 223
8.25.3. AVERAGE POWER 226
8.25.4. OUTPUT POWER AND PSD 227

8.26. 802.11ac VHT20 ANTENNA A STRADDLE CHANNEL 144 RESULTS 231
8.26.1. OUTPUT POWER AND PSD 231
8.26.2. 6 dB BANDWIDTH 235

8.27. 802.11n HT20 ANTENNA B MODE IN THE 5.6 GHz BAND 236
8.27.1. 26 dB BANDWIDTH 236

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.27.2. 99% BANDWIDTH 239
8.27.3. AVERAGE POWER 242
8.27.4. OUTPUT POWER AND PSD 243

8.28. 802.11ac VHT20 ANTENNA B STRADDLE CHANNEL 144 RESULTS 247
8.28.1. OUTPUT POWER AND PSD 247
8.28.2. 6 dB BANDWIDTH 251

8.29. 802.11n HT20 2Tx (ANTENNA A + ANTENNA B) CDD MODE IN THE 5.6 GHz BAND . 252
8.29.1. 26 dB BANDWIDTH 252
8.29.2. 99% BANDWIDTH 257
8.29.3. AVERAGE POWER 262
8.29.4. OUTPUT POWER AND PSD 263

8.30. 802.11ac VHT20 2Tx (ANTENNA A + ANTENNA B) CDD STRADDLE CHANNEL 144 RESULTS 269
8.30.1. OUTPUT POWER AND PSD 269
8.30.2. 6 dB BANDWIDTH 275

8.31. 802.11n HT20 2Tx (ANTENNA A + ANTENNA B) STBC MODE IN THE 5.6 GHz BAND 277
8.31.1. 26 dB BANDWIDTH 277
8.31.2. 99% BANDWIDTH 282
8.31.3. AVERAGE POWER 287
8.31.4. OUTPUT POWER AND PSD 288

8.32. 802.11ac VHT20 2Tx (ANTENNA A + ANTENNA B) STBC STRADDLE CHANNEL 144 RESULTS 294
8.32.1. OUTPUT POWER AND PSD 294
8.32.2. 6 dB BANDWIDTH 300

8.33. 802.11n HT40 ANTENNA A MODE IN THE 5.6 GHz BAND 302
8.33.1. 26 dB BANDWIDTH 302
8.33.2. 99% BANDWIDTH 305
8.33.3. AVERAGE POWER 308
8.33.4. OUTPUT POWER AND PSD 309

8.34. 802.11ac VHT40 ANTENNA A STRADDLE CH 142 RESULTS 313
8.34.1. OUTPUT POWER AND PSD 313
8.34.2. 6 dB BANDWIDTH 317

8.35. 802.11n HT40 ANTENNA B MODE IN THE 5.6 GHz BAND 318
8.35.1. 26 dB BANDWIDTH 318
8.35.2. 99% BANDWIDTH 321
8.35.3. AVERAGE POWER 324
8.35.4. OUTPUT POWER AND PSD 325

8.36. 802.11ac VHT40 ANTENNA B STRADDLE CH 142 RESULTS 329
8.36.1. OUTPUT POWER AND PSD 329
8.36.2. 6 dB BANDWIDTH 333

8.37. 802.11n HT40 2Tx (ANTENNA A + ANTENNA B) CDD MODE IN THE 5.6 GHz BAND . 334
8.37.1. 26 dB BANDWIDTH 334
8.37.2. 99% BANDWIDTH 339
8.37.3. AVERAGE POWER 344
8.37.4. OUTPUT POWER AND PSD 345

8.38. 802.11ac VHT40 2Tx (ANTENNA A + ANTENNA B) CDD STRADDLE CHANNEL 142 RESULTS 351
8.38.1. OUTPUT POWER AND PSD 351

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.38.2. 6 dB BBANDWIDTH 357

8.39. 802.11n HT40 2Tx (ANTENNA A + ANTENNA B) STBC MODE IN THE 5.6 GHz BAND 359

8.40. 802.11ac VHT80 ANTENNA A MODE IN THE 5.6 GHz BAND 360
8.40.1. 26 dB BANDWIDTH 360
8.40.2. 99% BANDWIDTH 363
8.40.3. AVERAGE POWER 366
8.40.4. OUTPUT POWER AND PSD 367

8.41. 802.11ac VHT80 ANTENNA A STRADDLE CHANNEL 138 RESULTS 370
8.41.1. OUTPUT POWER AND PSD 370
8.41.2. 6 dB BANDWIDTH 374

8.42. 802.11ac VHT80 ANTENNA B MODE IN THE 5.6 GHz BAND 375
8.42.1. 26 dB BANDWIDTH 375
8.42.2. 99% BANDWIDTH 378
8.42.3. AVERAGE POWER 381
8.42.4. OUTPUT POWER AND PSD 382

8.43. 802.11ac VHT80 ANTENNA B STRADDLE CHANNEL 138 RESULTS 385
8.43.1. OUTPUT POWER AND PSD 385
8.43.2. 6 dB BANDWIDTH 389

8.44. 802.11ac VHT80 2Tx (ANTENNA A + ANTENNA B) CDD MODE IN THE 5.6 GHz BAND 390
8.44.1. 26 dB BANDWIDTH 390
8.44.2. 99% BANDWIDTH 394
8.44.3. AVERAGE POWER 398
8.44.4. OUTPUT POWER AND PSD 399

8.45. 802.11ac VHT80 2Tx (ANTENNA A + ANTENNA B) CDD STRADDLE CHANNEL 138 RESULTS 404
8.45.1. OUTPUT POWER AND PSD 404
8.45.2. 6 dB BANDWIDTH 410

8.46. 802.11ac VHT80 2Tx (ANTENNA A + ANTENNA B) STBC MODE IN THE 5.6 GHz BAND 412

8.47. 802.11n HT20 ANTENNA A MODE IN THE 5.8 GHz BAND 413
8.47.1. 6 dB BANDWIDTH 413
8.47.2. 26 dB BANDWIDTH 416
8.47.3. 99% BANDWIDTH 419
8.47.4. AVERAGE POWER 422
8.47.5. OUTPUT POWER 423
8.47.6. PSD 425

8.48. 802.11n HT20 ANTENNA B MODE IN THE 5.8 GHz BAND 428
8.48.1. 6 dB BANDWIDTH 428
8.48.2. 26 dB BANDWIDTH 431
8.48.3. 99% BANDWIDTH 434
8.48.4. AVERAGE POWER 437
8.48.5. OUTPUT POWER 438
8.48.6. PSD 440

8.49. 802.11n HT20 2Tx (ANTENNA A + ANTENNA B) CDD MODE IN THE 5.8 GHz BAND . 443
8.49.1. 6 dB BANDWIDTH 443
8.49.2. 26 dB BANDWIDTH 447
8.49.3. 99% BANDWIDTH 451

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.49.4. AVERAGE POWER 455
8.49.5. OUTPUT POWER 456
8.49.6. PSD 458

8.50. 802.11n HT20 2Tx (ANTENNA A + ANTENNA B) STBC MODE IN THE 5.8 GHz BAND 463

8.51. 802.11n HT40 ANTENNA A MODE IN THE 5.8 GHz BAND 464
8.51.1. 6 dB BANDWIDTH 464
8.51.2. 26 dB BANDWIDTH 466
8.51.3. 99% BANDWIDTH 468
8.51.4. AVERAGE POWER 470
8.51.5. OUTPUT POWER 471
8.51.6. PSD 473

8.52. 802.11n HT40 ANTENNA B MODE IN THE 5.8 GHz BAND 476
8.52.1. 6 dB BANDWIDTH 476
8.52.2. 26 dB BANDWIDTH 478
8.52.3. 99% BANDWIDTH 480
8.52.4. AVERAGE POWER 482
8.52.5. OUTPUT POWER 483
8.52.6. PSD 485

8.53. 802.11n HT40 2Tx (ANTENNA A + ANTENNA B) CDD MODE IN THE 5.8 GHz BAND . 488
8.53.1. 6 dB BANDWIDTH 488
8.53.2. 26 dB BANDWIDTH 491
8.53.3. 99% BANDWIDTH 494
8.53.4. AVERAGE POWER 497
8.53.5. OUTPUT POWER 498
8.53.6. PSD 500

8.54. 802.11n HT40 2Tx (ANTENNA A + ANTENNA B) STBC MODE IN THE 5.8 GHz BAND 504

8.55. 802.11ac VHT80 ANTENNA A MODE IN THE 5.8 GHz BAND 505
8.55.1. 6 dB BANDWIDTH 505
8.55.2. 26 dB BANDWIDTH 506
8.55.3. 99% BANDWIDTH 507
8.55.4. AVERAGE POWER 508
8.55.5. OUTPUT POWER 509
8.55.6. PSD 511

8.56. 802.11ac VHT80 ANTENNA B MODE IN THE 5.8 GHz BAND 513
8.56.1. 6 dB BANDWIDTH 513
8.56.2. 26 dB BANDWIDTH 514
8.56.3. 99% BANDWIDTH 515
8.56.4. AVERAGE POWER 516
8.56.5. OUTPUT POWER 517
8.56.6. PSD 519

8.57. 802.11ac VHT80 2Tx (ANTENNA A + ANTENNA B) CDD MODE IN THE 5.8 GHz BAND 521
8.57.1. 6 dB BANDWIDTH 521
8.57.2. 26 dB BANDWIDTH 523
8.57.3. 99% BANDWIDTH 525
8.57.4. AVERAGE POWER 527
8.57.5. OUTPUT POWER 528
8.57.6. PSD 530

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.58. 802.11ac VHT80 2Tx (ANTENNA A + ANTENNA B) STBC MODE IN THE 5.8 GHz BAND 533

9. RADIATED RESULTS 534

9.1. LIMITS AND PROCEDURE 534
9.1.1. 11n HT20 ANTENNA A SISO MODE IN THE 5.2GHz BAND 535
9.1.2. 11n HT20 ANTENNA B SISO MODE IN THE 5.2GHz BAND 543
9.1.3. 11n HT20 2TX CDD MIMO MODE IN THE 5.2GHz BAND 551
9.1.4. 11n HT40 ANTENNA A SISO MODE IN THE 5.2GHz BAND 559
9.1.5. 11n HT40 ANTENNA B SISO MODE IN THE 5.2GHz BAND 565
9.1.6. 11n HT40 2TX CDD MIMO MODE IN THE 5.2GHz BAND 571
9.1.7. 11ac HT80 ANTENNA A SISO MODE IN THE 5.2GHz BAND 577
9.1.8. 11ac HT80 ANTENNA B SISO MODE IN THE 5.2GHz BAND 581
9.1.9. 11ac HT80 2TX CDD MIMO MODE IN THE 5.2GHz BAND 585
9.1.10. 11n HT20 ANTENNA A SISO MODE IN THE 5.3GHz BAND 589
9.1.11. 11n HT20 ANTENNA B SISO MODE IN THE 5.3GHz BAND 597
9.1.12. 11n HT20 2TX CDD MIMO MODE IN THE 5.3GHz BAND 605
9.1.13. 11n HT40 ANTENNA A SISO MODE IN THE 5.3GHz BAND 613
9.1.14. 11n HT40 ANTENNA B SISO MODE IN THE 5.3GHz BAND 619
9.1.15. 11ac HT80 ANTENNA A SISO MODE IN THE 5.3GHz BAND 631
9.1.16. 11ac HT80 ANTENNA B SISO MODE IN THE 5.3GHz BAND 635
9.1.17. 11ac HT80 2TX CDD MIMO MODE IN THE 5.3GHz BAND 639
9.1.18. 11n HT20 ANTENNA A SISO MODE IN THE 5.6GHz BAND 643
9.1.19. 11ac HT20 ANTENNA A SISO STRADDLE CHANNEL 144 653
9.1.20. 11n HT20 ANTENNA B SISO MODE IN THE 5.6GHz BAND 655
9.1.21. 11ac HT20 ANTENNA B SISO STRADDLE CHANNEL 144 665
9.1.22. 11n HT20 2TX CDD MIMO MODE IN THE 5.6GHz BAND 667
9.1.23. 11ac HT20 2TX CDD MIMO STRADDLE CHANNEL 144 677
9.1.24. 11n HT40 ANTENNA A SISO MODE IN THE 5.6GHz BAND 679
9.1.25. 11n HT40 ANTENNA A SISO STRADDLE CHANNEL 142 689
9.1.26. 11n HT40 ANTENNA B SISO MODE IN THE 5.6GHz BAND 691
9.1.27. 11n HT40 ANTENNA B SISO STRADDLE CHANNEL 142 701
9.1.28. 11n HT40 2TX CDD MIMO MODE IN THE 5.6GHz BAND 703
9.1.29. 11ac HT40 2TX CDD MIMO STRADDLE CHANNEL 142 713
9.1.30. 11ac HT80 ANTENNA A SISO MODE IN THE 5.6GHz BAND 715
9.1.31. 11ac HT80 ANTENNA A SISO STRADDLE CHANNEL 138 721
9.1.32. 11ac HT80 ANTENNA B SISO MODE IN THE 5.6GHz BAND 723
9.1.33. 11ac HT80 ANTENNA B SISO STRADDLE CHANNEL 138 729
9.1.34. 11ac HT80 2TX CDD MIMO MODE IN THE 5.6GHz BAND 731
9.1.35. 11ac HT80 2TX CDD MIMO STRADDLE CHANNEL 138 737
9.1.36. 11n HT20 ANTENNA A SISO MODE IN THE 5.8GHz BAND 739
9.1.37. 11n HT20 ANTENNA B SISO MODE IN THE 5.8GHz BAND 749
9.1.38. 11n HT20 2TX CDD MIMO MODE IN THE 5.8GHz BAND 759
9.1.39. 11n HT40 ANTENNA A SISO MODE IN THE 5.8GHz BAND 769
9.1.40. 11n HT40 ANTENNA B SISO MODE IN THE 5.8GHz BAND 777
9.1.41. 11n HT40 2TX CDD MIMO MODE IN THE 5.8GHz BAND 785
9.1.42. 11ac HT80 ANTENNA A SISO MODE IN THE 5.8GHz BAND 793
9.1.43. 11ac HT80 ANTENNA B SISO MODE IN THE 5.8GHz BAND 799
9.1.44. 11ac HT80 2TX CDD MIMO MODE IN THE 5.8GHz BAND 805

9.2. RADIATION CO-LOCATION 811
9.2.1. BLUETOOTH & 802.11 HT20 2Tx CDD MODE IN THE 5.3GHz BAND 811

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.2.2. BLUETOOTH LOW ENERGY & 802.11 HT20 2Tx CDD MODE IN THE 5.3GHz BAND 813

9.3. WORST-CASE BELOW 1 GHz 815

9.4. WORST-CASE 18 to 26 GHz 817

9.5. WORST-CASE 26 to 40 GHz 819

10. AC POWER LINE CONDUCTED EMISSIONS 821

10.1. EUT POWERED BY AC/DC ADAPTER VIA USB CABLE 822

10.2. EUT POWERED BY HOST PC VIA USB CABLE 824

11. DYNAMIC FREQUENCY SELECTION 826

11.1. OVERVIEW 826
11.1.1. LIMITS 826
11.1.2. TEST AND MEASUREMENT SYSTEM 830
11.1.3. TEST AND MEASUREMENT SOFTWARE 832
11.1.4. SETUP OF EUT (CLIENT MODE) 833
11.1.5. SETUP OF EUT (CLIENT-TO-CLIENT COMMUNICATIONS MODE) 834
11.1.6. DESCRIPTION OF EUT 835

11.2. CLIENT MODE RESULTS FOR 20 MHz BANDWIDTH 837
11.2.1. TEST CHANNEL 837
11.2.2. RADAR WAVEFORM AND TRAFFIC 837
11.2.3. OVERLAPPING CHANNEL TESTS 840
11.2.4. MOVE AND CLOSING TIME 840

11.3. CLIENT MODE RESULTS FOR 40 MHz BANDWIDTH 844
11.3.1. TEST CHANNEL 844
11.3.2. RADAR WAVEFORM AND TRAFFIC 844
11.3.3. OVERLAPPING CHANNEL TESTS 847
11.3.4. MOVE AND CLOSING TIME 847

11.4. CLIENT MODE RESULTS FOR 80 MHz BANDWIDTH 851
11.4.1. TEST CHANNEL 851
11.4.2. RADAR WAVEFORM AND TRAFFIC 851
11.4.3. OVERLAPPING CHANNEL TESTS 854
11.4.4. MOVE AND CLOSING TIME 854
11.4.5. 10-MINUTE CLIENT Tx MONITORING PERIOD 858

11.5. CLIENT-TO-CLIENT COMMUNICATIONS MODE RESULTS FOR 20 MHz BANDWIDTH 859
11.5.1. TEST CHANNEL 859
11.5.2. RADAR WAVEFORM AND TRAFFIC 859
11.5.3. OVERLAPPING CHANNEL TESTS 862
11.5.4. MOVE AND CLOSING TIME 862

11.6. CLIENT-TO-CLIENT COMMUNICATIONS MODE RESULTS FOR 40 MHz BANDWIDTH 866
11.6.1. TEST CHANNEL 866
11.6.2. RADAR WAVEFORM AND TRAFFIC 866
11.6.3. OVERLAPPING CHANNEL TESTS 869
11.6.4. MOVE AND CLOSING TIME 869

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

11.7. CLIENT-TO-CLIENT COMMUNICATIONS MODE RESULTS FOR 80 MHz BANDWIDTH 873
11.7.1. TEST CHANNEL 873
11.7.2. RADAR WAVEFORM AND TRAFFIC 873
11.7.3. OVERLAPPING CHANNEL TESTS 876
11.7.4. MOVE AND CLOSING TIME 876
11.7.5. 10-MINUTE CLIENT Tx MONITORING PERIOD 880

12. SETUP PHOTOS 881

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: APPLE, INC.
1 INFINITE LOOP
CUPERTINO, CA 95014, U.S.A.

EUT DESCRIPTION: TABLET DEVICE

MODEL: A1822

SERIAL NUMBER: CONDUCTED (F9FSQ02CHQNX), RADIATED (F9FSJ00HHN9P), DFS (F9FSQ01LHQNX)

DATE TESTED: NOVEMBER 08, 2016 TO JANUARY 23, 2017

APPLICABLE STANDARDS	
STANDARD	**TEST RESULTS**
CFR 47 Part 15 Subpart E	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:

CHIN PANG
SENIOR ENGINEER
UL VERIFICATION SERVICES INC.

Prepared By:

JOE VANG
EMC WISE ENGINEER
UL VERIFICATION SERVICES INC.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, FCC 14-30, FCC KDB 662911 D01 v02r01, FCC KDB 905462 D02 v02/D03 v01r02/D06 v02/ D07 v02, FCC KDB 789033 D02 v01r03, FCC KDB 644545 D03 v01, ANSI C63.10-2013.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
☐ Chamber A (IC:2324B-1)	☒ Chamber D (IC:2324B-4)
☐ Chamber B (IC:2324B-2)	☒ Chamber E (IC:2324B-5)
☐ Chamber C (IC:2324B-3)	☒ Chamber F (IC:2324B-6)
	☒ Chamber G (IC:2324B-7)
	☐ Chamber H (IC:2324B-8)

The above test sites and facilities are covered under FCC Test Firm Registration # 208313.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at http://ts.nist.gov/standards/scopes/2000650.htm.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

Field Strength (dBuV/m) = Measured Voltage (dBuV) + Antenna Factor (dB/m) + Cable Loss (dB) – Preamp Gain (dB)

36.5 dBuV + 18.7 dB/m + 0.6 dB – 26.9 dB = 28.9 dBuV/m

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 9KHz to 0.15 MHz	3.84 dB
Conducted Disturbance, 0.15 to 30 MHz	3.65 dB
Radiated Disturbance, 9KHz to 30 MHz	3.15 dB
Radiated Disturbance, 30 to 1000 MHz	5.36 dB
Radiated Disturbance,1000 to 18000 MHz	4.32 dB
Radiated Disturbance,18000 to 26000 MHz	4.45 dB
Radiated Disturbance,26000 to 40000 MHz	5.24 dB

Uncertainty figures are valid to a confidence level of 95%.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a tablet with multimedia functions (music, application support, and video), IEEE 802.11a/b/g/n/ac radio, and Bluetooth radio. The rechargeable battery is not user accessible.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum average conducted output power as follows:
NOTE: Covered modes are test reduction modes. The output powers on the “covered modes are equal to or less than the mode referenced and use the same modulation.

5.2GHz Band

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5180 - 5240	802.11a	Covered by 802.11n HT20 SISO	
	802.11n HT20 SISO	16.49	44.57
	802.11a 2TX CDD	Covered by 802.11n HT20 2TX CDD	
	802.11n HT20 2TX CDD	19.42	87.50
	802.11n HT20 2TX STBC	Covered by 802.11n HT20 2TX CDD	
	802.11ac VHT20 2TX STBC	Covered by 802.11n HT20 2TX CDD	
	802.11n HT20 2TX SDM	Covered by 802.11n HT20 2TX CDD	
	802.11ac VHT20 2TX SDM	Covered by 802.11n HT20 2TX CDD	
5190 - 5230	802.11n HT40 SISO	16.40	43.65
	802.11n HT40 2TX CDD	19.47	88.51
	802.11n HT40 2TX STBC	Covered by 802.11n HT40 2TX CDD	
	802.11ac VHT40 2TX STBC	Covered by 802.11n HT40 2TX CDD	
	802.11n HT40 2TX SDM	Covered by 802.11n HT40 2TX CDD	
	802.11ac VHT40 2TX SDM	Covered by 802.11n HT40 2TX CDD	
5210	802.11ac VHT80 SISO	13.98	25.00
	802.11ac VHT80 2TX CDD	15.72	37.33
	802.11ac VHT80 2TX STBC	Covered by 802.11ac VHT80 2TX CDD	
	802.11ac VHT80 2TX SDM	Covered by 802.11ac VHT80 2TX CDD	

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

5.3GHz Band

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5260 - 5320	802.11a	Covered by 802.11n HT20 SISO	
	802.11n HT20 SISO	16.93	49.32
	802.11a 2TX CDD	Covered by 802.11n HT20 2TX CDD	
	802.11n HT20 2TX CDD	19.47	88.51
	802.11n HT20 2TX STBC	19.96	99.08
	802.11n HT20 2TX SDM	Covered by 802.11n HT20 2TX STBC	
	802.11ac VHT20 2TX SDM	Covered by 802.11n HT20 2TX STBC	
5270 - 5310	802.11n HT40 SISO	16.94	49.43
	802.11n HT40 2TX CDD	19.94	98.63
	802.11n HT40 2TX STBC	Covered by 802.11n HT40 2TX CDD	
	802.11ac VHT40 2TX STBC	Covered by 802.11n HT40 2TX CDD	
	802.11n HT40 2TX SDM	Covered by 802.11n HT40 2TX CDD	
	802.11ac VHT40 2TX SDM	Covered by 802.11n HT40 2TX CDD	
5290	802.11ac VHT80 SISO	12.97	19.82
	802.11ac VHT80 2TX CDD	14.99	31.55
	802.11ac VHT80 2TX STBC	Covered by 802.11ac VHT80 2TX CDD	
	802.11ac VHT80 2TX SDM	Covered by 802.11ac VHT80 2TX CDD	

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

5.6GHz Band

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5500 - 5700	802.11a	Covered by 802.11n HT20 SISO	
5500 - 5700	802.11n HT20 SISO	16.97	49.77
5720	802.11ac VHT20 SISO (based on UNII-2C band output power)	15.53	35.73
5500 - 5700	802.11a 2TX CDD	Covered by 802.11n HT20 2TX CDD	
5500 - 5700	802.11n HT20 2TX CDD	18.49	70.63
5720	802.11ac VHT20 2TX CDD (based on UNII-2C band output power)	17.08	51.05
5500 - 5700	802.11n HT20 2TX STBC	19.73	93.97
5720	802.11ac VHT20 2TX STBC (based on UNII-2C band output power)	18.37	68.66
5500 - 5700	802.11n HT20 2TX SDM	Covered by 802.11n HT20 2TX STBC	
5500 - 5700	802.11ac VHT20 2TX SDM	Covered by 802.11n HT20 2TX STBC	
5720	802.11ac VHT20 2TX SDM (based on UNII-2C band output power)	Covered by 802.11n HT20 2TX STBC	
5510 - 5670	802.11n HT40 SISO	16.81	47.97
5710	802.11ac VHT40 SISO (based on UNII-2C band output power)	16.58	45.50
5510 - 5670	802.11n HT40 2TX CDD	19.68	92.90
5710	802.11ac VHT40 2TX CDD (based on UNII-2C band output power)	19.11	81.47
5510 - 5670	802.11n HT40 2TX STBC	Covered by 802.11n HT40 2TX CDD	
5510 - 5670	802.11ac VHT40 2TX STBC	Covered by 802.11n HT40 2TX CDD	
5710	802.11ac VHT40 2TX STBC (based on UNII-2C band output power)	Covered by 802.11n HT40 2TX CDD	
5510 - 5670	802.11n HT40 2TX SDM	Covered by 802.11n HT40 2TX CDD	
5510 - 5670	802.11ac VHT40 2TX SDM	Covered by 802.11n HT40 2TX CDD	
5710	802.11ac VHT40 2TX SDM (based on UNII-2C band output power)	Covered by 802.11n HT40 2TX CDD	
5530-5610	802.11ac VHT80 SISO	16.89	48.87
5690	802.11ac VHT80 SISO (based on UNII-2C band output power)	16.89	48.87
5530-5610	802.11ac VHT80 2TX CDD	19.69	93.11
5690	802.11ac VHT80 2TX CDD (based on UNII-2C band output power)	19.59	90.99
5530-5610	802.11ac VHT80 2TX STBC	Covered by 802.11ac VHT80 2TX CDD	
5690	802.11ac VHT80 2TX STBC(based on UNII-2C band output power)	Covered by 802.11ac VHT80 2TX CDD	
5530-5610	802.11ac VHT80 2TX SDM	Covered by 802.11ac VHT80 2TX CDD	
5690	802.11ac VHT80 2TX SDM (based on UNII-2C band output power)	Covered by 802.11ac VHT80 2TX CDD	

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

5.8GHz Band

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5745 - 5825	802.11a	Covered by 802.11n HT20 SISO	
	802.11n HT20 SISO	16.46	44.26
	802.11a 2TX CDD	Covered by 802.11n HT20 2TX CDD	
	802.11n HT20 2TX CDD	19.48	88.72
	802.11n HT20 2TX STBC	Covered by 802.11n HT20 2TX CDD	
	802.11ac VHT20 2TX STBC	Covered by 802.11n HT20 2TX CDD	
	802.11n HT20 2TX SDM	Covered by 802.11n HT20 2TX CDD	
	802.11ac VHT20 2TX SDM	Covered by 802.11n HT20 2TX CDD	
5755 - 5795	802.11n HT40 SISO	16.47	44.36
	802.11n HT40 2TX CDD	19.49	88.92
	802.11n HT40 2TX STBC	Covered by 802.11n HT40 2X CDD	
	802.11ac VHT40 2TX STBC	Covered by 802.11n HT40 2X CDD	
	802.11n HT40 2TX SDM	Covered by 802.11n HT40 2X CDD	
	802.11ac VHT40 2TX SDM	Covered by 802.11n HT40 2X CDD	
5775	802.11ac VHT80 SISO	16.44	44.06
	802.11ac VHT80 2TX CDD	17.97	62.66
	802.11ac VHT80 2TX STBC	Covered by 802.11ac VHT80 2TX CDD	
	802.11ac VHT80 2TX SDM	Covered by 802.11ac VHT80 2TX CDD	

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

Frequency Band (GHz)	Antenna Gain (dBi)	
	Antenna A	Antenna B
5.2	1.27	2.64
5.3	2.24	2.77
5.5	3.39	3.17
5.8	3.54	3.21

5.4. SOFTWARE AND FIRMWARE

The firmware installed in the EUT during testing was 14E232.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

5.5. WORST-CASE CONFIGURATION AND MODE

For radiated harmonics spurious below 1GHz, 18-40GHz and power line conducted emissions were performed with the EUT set at the CDD mode at highest power setting among the CDD/STBC/SDM modes as worst-case scenario.

The output power for PSD and spurious tests was set higher than maximum for the purposes of testing only.

For SISO modes, there are two transmission antennas. The antenna used in any given time can be either ANTENNA A, or ANTENNA B. All antenna ports have the same power; output power and PSD measurement for SISO modes on both antennas are reported. For 2TX MIMO modes, ANTENNA A/ANTENNA B, used at the same time.

The fundamental of the EUT was investigated in three orthogonal orientations X (Flatbed), Y (Landscape), Z (Portrait), it was determined that (see table below) was worst-case orientations. Therefore, all final radiated testing was performed with the EUT in (see table below) orientation.

Frequency Band (GHz)	Mode	Antenna Port	Worst-case Orientation
5.2-5.8	1TX SISO	Antenna A	Y (Landscape)
		Antenna B	Y (Landscape)
	2TX MIMO	Antenna A + Antenna B	Y (Landscape)

Worst-case data rates as provided by the client were:

802.11a mode: 6 Mbps
802.11n HT20 mode: MCS0
802.11n HT40 mode: MCS0
802.11ac VHT20 mode: MCS0
802.11ac VHT40 mode: MCS0
802.11ac VHT80 mode: MCS0

802.11ac VHT20 and VHT40 mode are different from 802.11nHT20 and HT40 only in control messages and have the same power settings.

There are two vendors of the WiFi/Bluetooth radio modules: variant 1 and variant 2. The Wi-Fi/Bluetooth radio modules have the same mechanical outline (e.g., the same package dimension and pin-out layout), use the same on-board antenna matching circuit, have an identical antenna structure, and are built and tested to conform to the same specifications and to operate within the same tolerances.

Baseline testing was performed on the two variants to determine the worst case on all conducted power and radiated emissions.

For simultaneous transmission of multiple channels from the same antenna in BT/BLE and WLAN 5 GHz bands. Baseline testing was performed on various configurations to determine the worst case on radiated emissions.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop	Apple	A1286	7313700NAGW	N/A
Laptop AC/DC adapter	Apple	A1343	C062172045DDJ94A6	N/A
Earphone	Apple	NA	NA	N/A
EUT AC/DC adapter	Apple	A1357	W010A051	N/A

I/O CABLES (CONDUCTED TEST)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	Antenna	1	SMA	Un-Shielded	0.2	To spectrum Analyzer
2	USB	1	USB	Shielded	1	N/A
3	AC	1	AC	Un-shielded	2	N/A

I/O CABLES (RADIATED ABOVE 1 GHZ)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
None Used						

I/O CABLES (RADIATED BELOW 1 GHZ AND AC LINE CONDUCTED: AC/DC ADAPTER CONFIGURATION)

I/O Cable List						
Cable No	Port	# of identical	Connector Type	Cable Type	Cable Length (m)	Remarks
1	Earphone Jack	1	3.5mm Audio	Shielded	0.9	N/A
2	USB	1	USB	shielded	1	N/A

I/O CABLES (AC LINE CONDUCTED: LAPTOP CONFIGUARTION)

I/O Cable List						
Cable No	Port	# of identical	Connector Type	Cable Type	Cable Length (m)	Remarks
1	Earphone Jack	1	3.5mm Audio	Shielded	0.9	N/A
2	USB	1	USB	Shielded	1	N/A
3	AC	1	AC	Un-shielded	2	N/A

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

TEST SETUP - CONDUCTED TESTS

The EUT was connected to a host Laptop via USB cable adapter and spectrum analyzer to antenna port. Test software exercised the EUT.

SETUP DIAGRAM

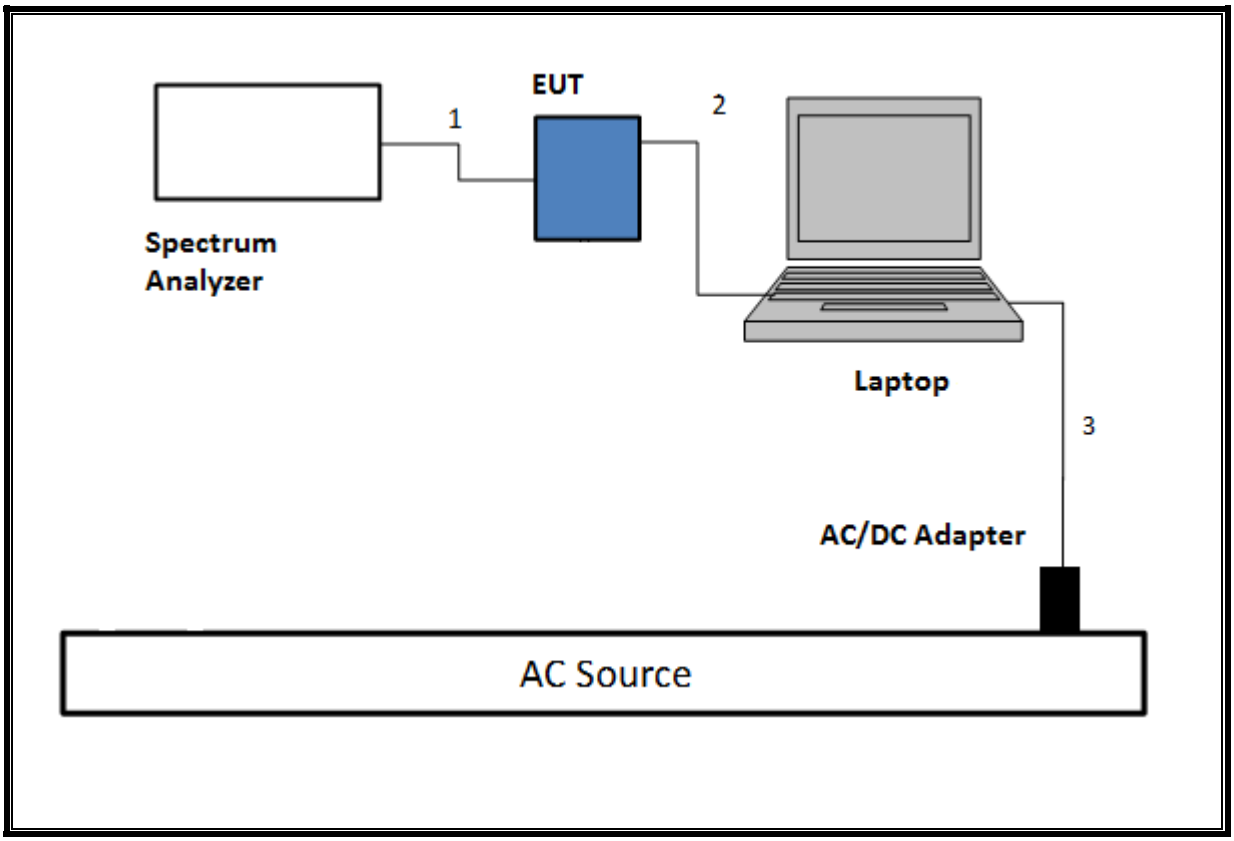

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

TEST SETUP- RADIATED-ABOVE 1 GHZ

The EUT was powered by battery. Test software exercised the EUT.

SETUP DIAGRAM

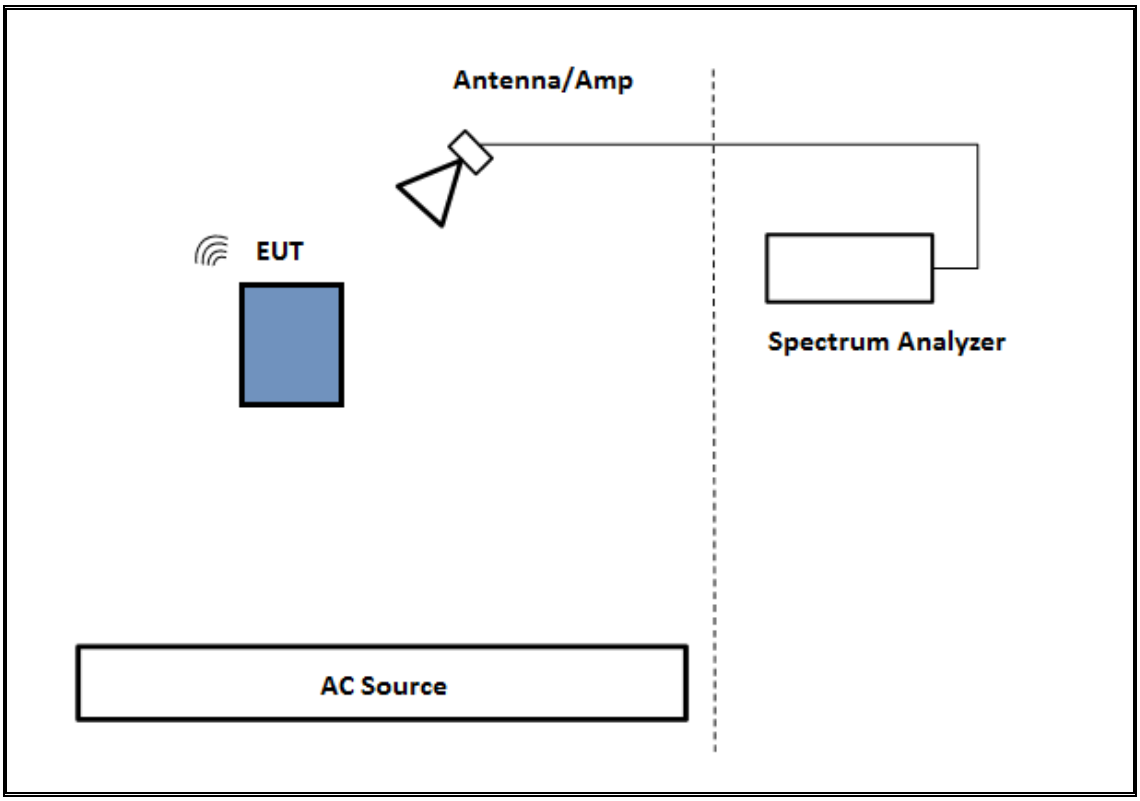

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

TEST SETUP- BELOW 1GHz

The EUT was powered by AC/DC adapter and connected with earphone. Test software exercised the EUT.

SETUP DIAGRAM

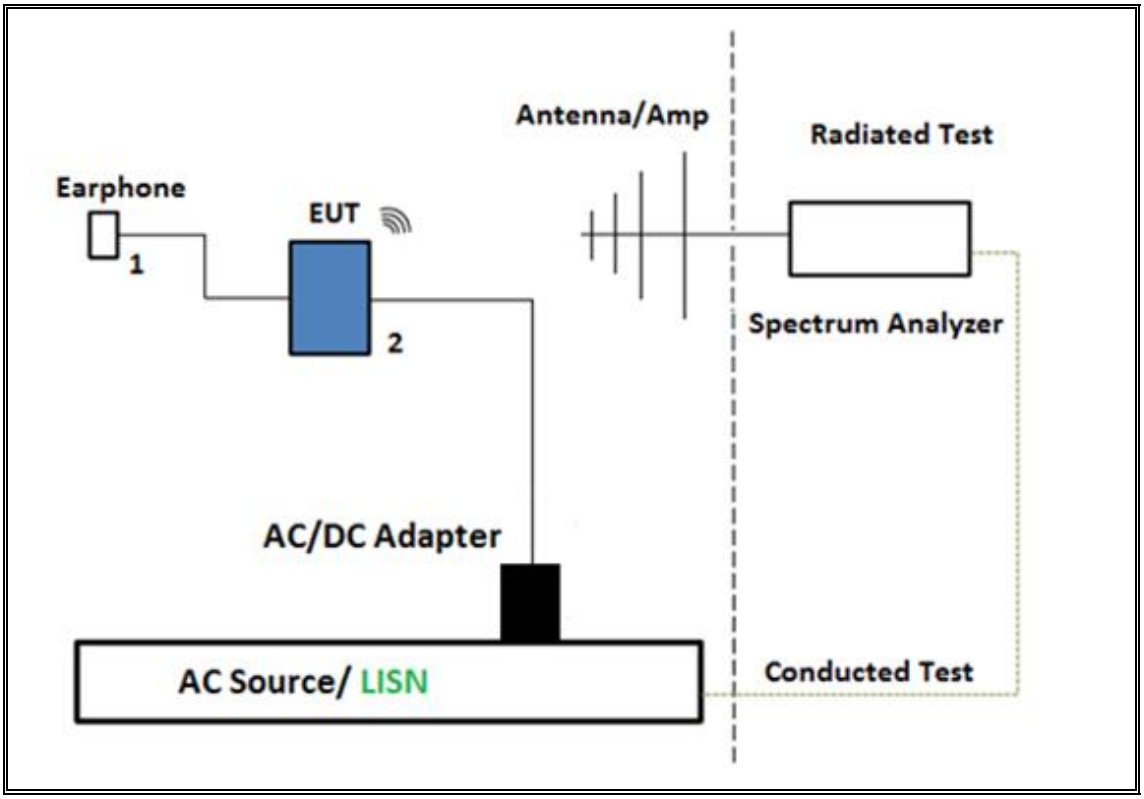

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

TEST SETUP- AC LINE CONDUCTED: AC/DC ADAPTER CONFIGURATION

The EUT was tested with earphone connected and powered by AC/DC adapter via USB cable. Test software exercised the EUT.

SETUP DIAGRAM

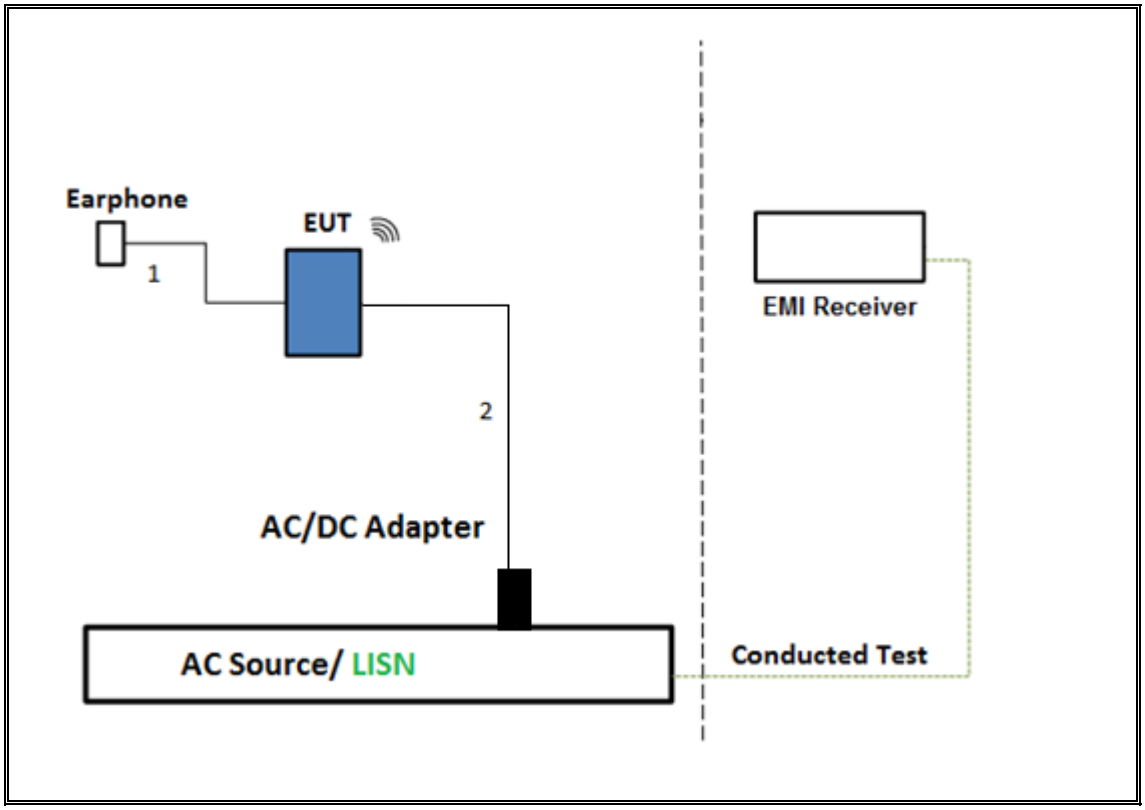

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

TEST SETUP- AC LINE CONDUCTED: LAPTOP CONFIGURATION

The EUT was tested with earphone connected and powered by host PC via USB cable. Test software exercised the EUT.

SETUP DIAGRAM

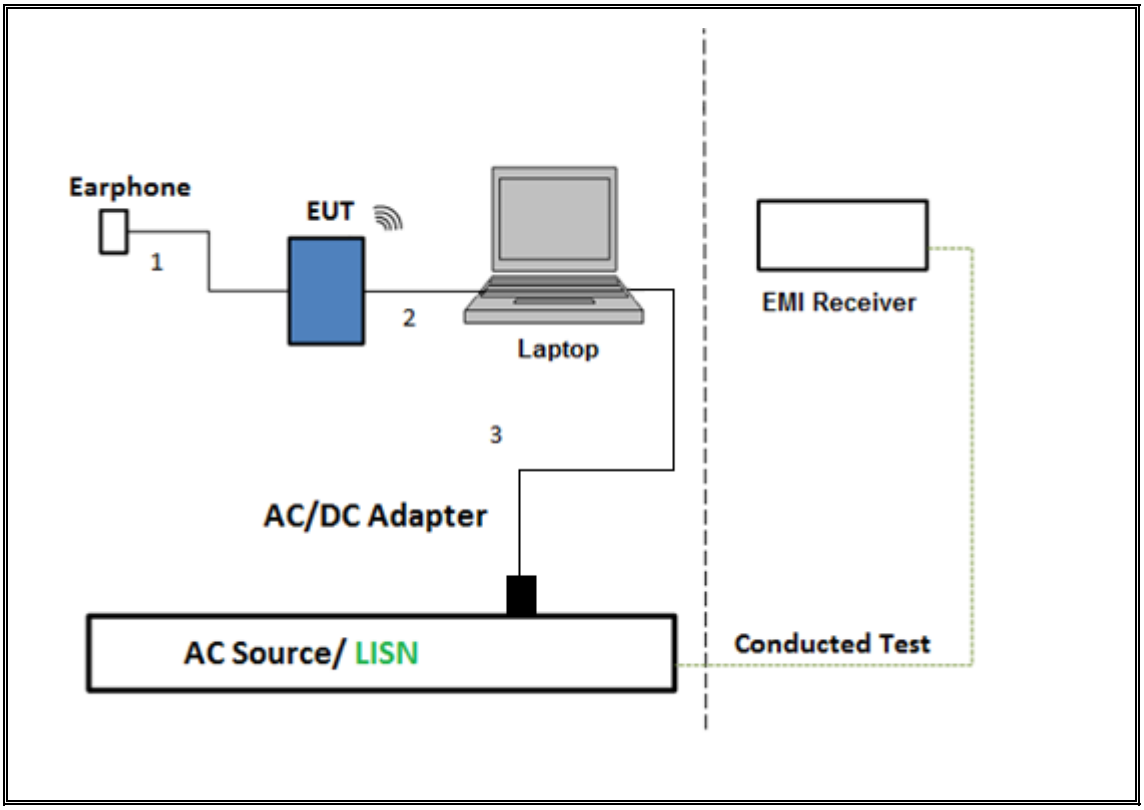

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	**Manufacturer**	**Model**	**Asset**	**Cal Due**
Power Meter, P-series single channel	Agilent	N1911A	T227	10/11/2017
Power Sensor, P - series, 50MHz to 18GHz, Wideband	Agilent	N1921A	T1228	06/20/2017
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	T344	02/22/2017
Antenna, Broadband Hybrid, 30MHz to 2000MHz	Sunol Sciences Corp.	JB3	T407	04/04/2017
RF Amplifier, 1-18GHz	MITEQ	AFS42-00101800-25-S-42	T740	11/29/2017
Amplifier, 10KHz to 1GHz, 32dB	Sonoma Instrument	310	T286	05/04/2017
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent (Keysight) Technologies	N9030A	T905	06/21/2017
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	T346	02/22/2017
Antenna, Broadband Hybrid, 30MHz to 2000MHz	Sunol Sciences Corp.	JB3	T408	11/10/2017
RF Amplifier, 1-18GHz	MITEQ	AFS42-00101800-25-S-42	T1131	09/23/2017
Amplifier, 10KHz to 1GHz, 32dB	Sonoma Instrument	310	T285	06/20/2017
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent (Keysight) Technologies	N9030A	T459	06/13/2017
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent (Keysight) Technologies	N9030A	T1210	06/30/2017
Antenna, Horn 18 to 26.5GHz	ARA	MWH-1826/B	T447	06/16/2017
Amplifier, 1 to 26.5GHz, 23.5dB Gain minimum	Keysight	8449B	T402	7/5/2017
Antenna, Horn 26.5GHz to 40GHz	ARA	MWH-2640/B	T446	05/25/2017
Amplifier, 26.5GHz to 40GHz	Miteq	NSP 4000 SP2	T88	04/07/2017
AC Line Conducted				
* EMI Test Receiver 9Khz-7GHz	Rohde & Schwarz	ESCI7	T1436	12/19/2016
LISN for Conducted Emissions CISPR-16	Fischer	50/250-25-2-01	T1310	06/08/2017
UL AUTOMATION SOFTWARE				
Radiated Software	UL	UL EMC	Ver 9.5, April 26, 2016	
Conducted Software	UL	UL EMC	Ver 5.4, October 13, 2016	
AC Line Conducted Software	UL	UL EMC	Ver 9.5, May 26, 2015	

*Testing is completed before equipment expiration date.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

7. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS

7.1. ON TIME AND DUTY CYCLE

LIMITS

None; for reporting purposes only.

PROCEDURE

KDB 789033 Zero-Span Spectrum Analyzer Method.

RESULTS

Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/B Minimum VBW (kHz)
802.11n HT20 1TX	1.920	1.941	0.989	98.92%	0.00	0.010
802.11n HT20 CDD 2TX	1.920	1.943	0.988	98.82%	0.00	0.010
802.11n HT40 1TX	0.944	0.966	0.977	97.72%	0.10	1.059
802.11n HT40 CDD 2TX	0.944	0.966	0.977	97.72%	0.10	1.059
802.11ac VHT80 1TX	0.4600	0.4810	0.956	95.63%	0.19	2.174
802.11ac VHT80 CDD 2TX	0.4596	0.4812	0.955	95.51%	0.20	2.176

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

DUTY CYCLE PLOTS

DUTY CYCLE 802.11n HT20 1TX MODE

DUTY CYCLE 802.11n HT20 CDD 2TX MODE

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

DUTY CYCLE 802.11n HT40 1TX MODE

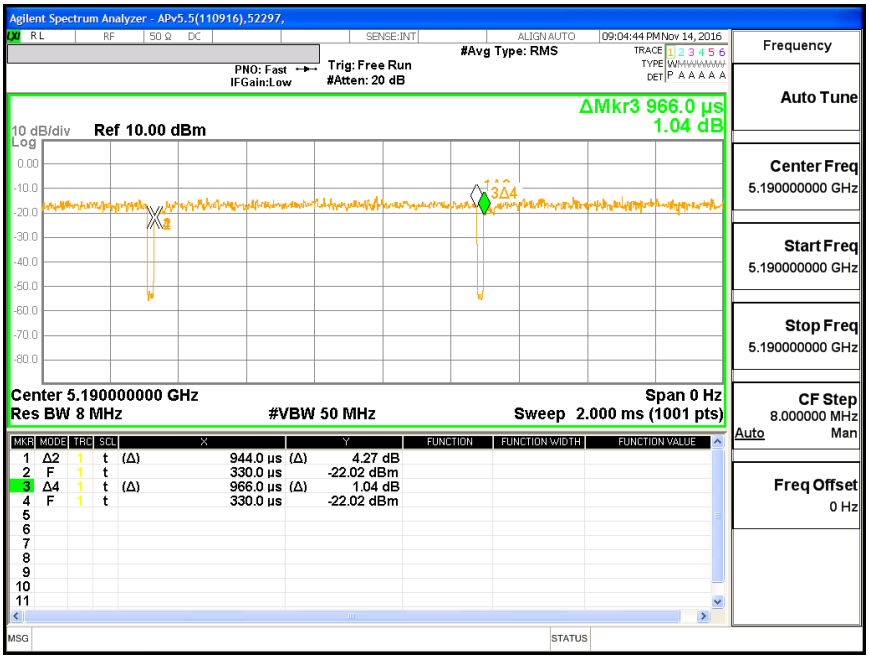

DUTY CYCLE 802.11n HT40 CDD 2TX MODE

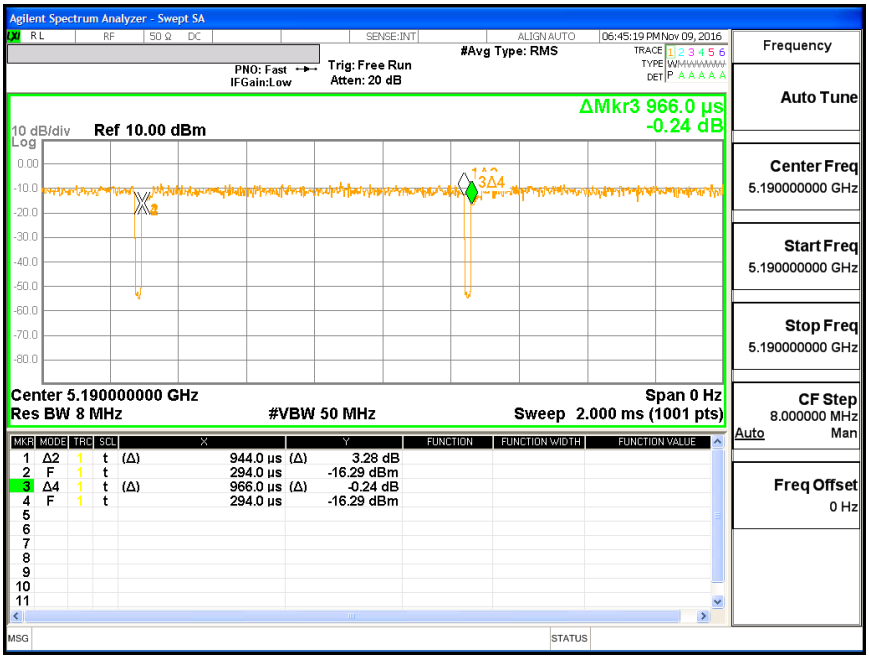

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

DUTY CYCLE 802.11ac VHT80 1TX MODE

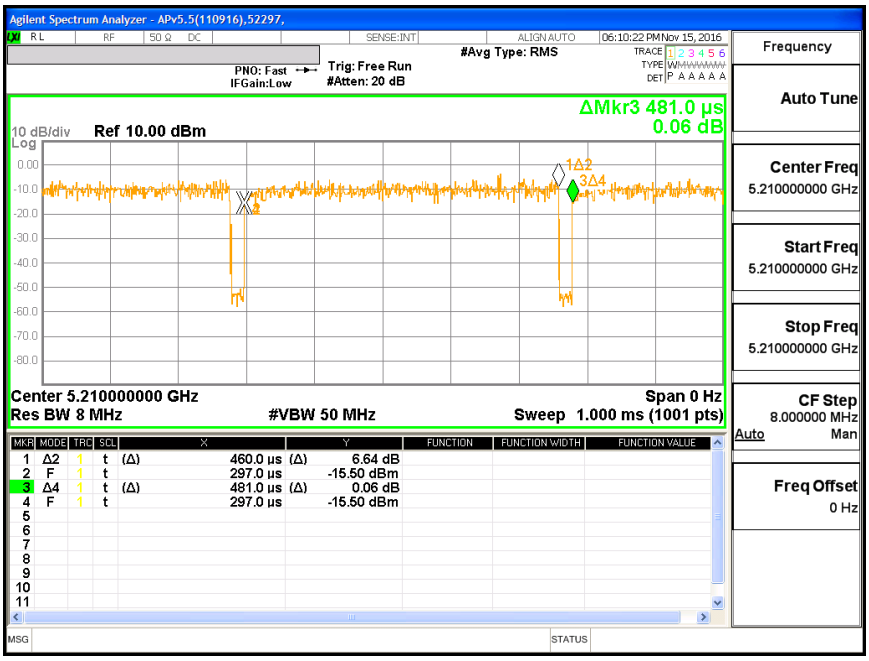

DUTY CYCLE 802.11ac VHT80 CDD 2TX MODE

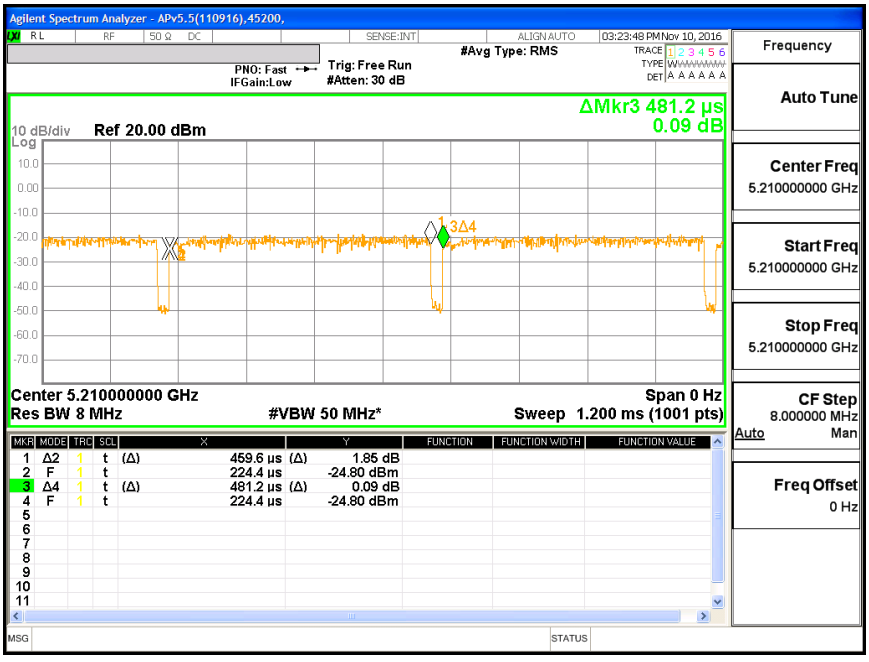

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

7.2. MEASUREMENT METHODS

6 dB Emission BW: KDB 789033 D02 v01r03, Section C.

26 dB Emission BW: KDB 789033 D02 v01r03, Section C.

99% Occupied BW: KDB 789033 D02 v01r03, Section D.

Conducted Output Power: KDB 789033 D02 v01r03, Section E.3.b (Method PM-G).

Power Spectral Density: KDB 789033 D02 v01r03, Section F (Method SA-2).

Unwanted emissions in restricted bands: KDB 789033 D02 v01r03, Sections G.3, G.4, G.5, and G.6.

Unwanted emissions in non-restricted bands: KDB 789033 D02 v01r03, Sections G.3, G.4, and G.5.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8. ANTENNA PORT TEST RESULTS

8.1. 802.11n HT20 ANTENNA A MODE IN THE 5.2 GHz BAND

8.1.1. 26 dB BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5180	21.840
Mid	5200	22.000
High	5240	21.840

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

26 dB BANDWIDTH

BANDWIDTH, LOW CH

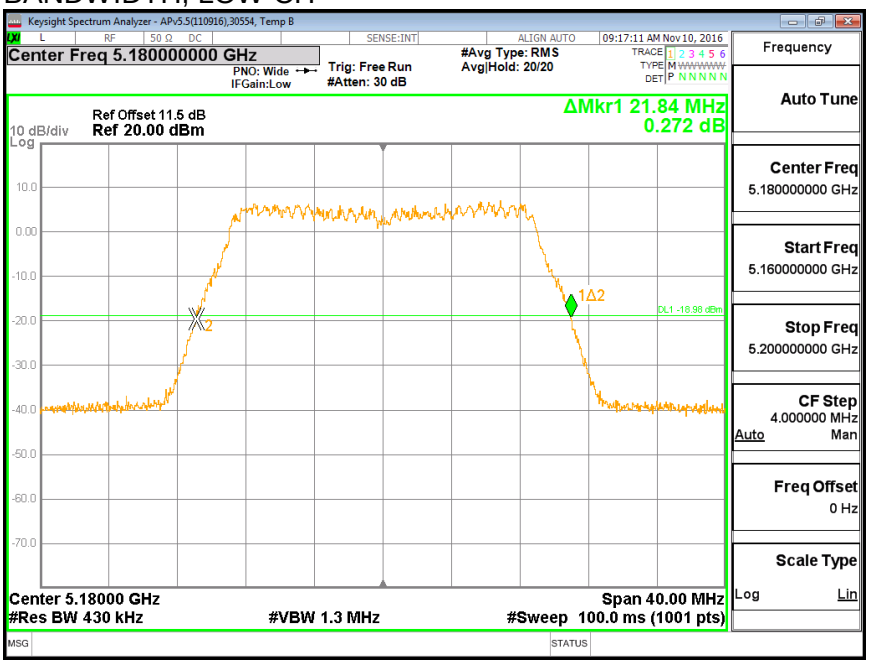

BANDWIDTH, MID CH

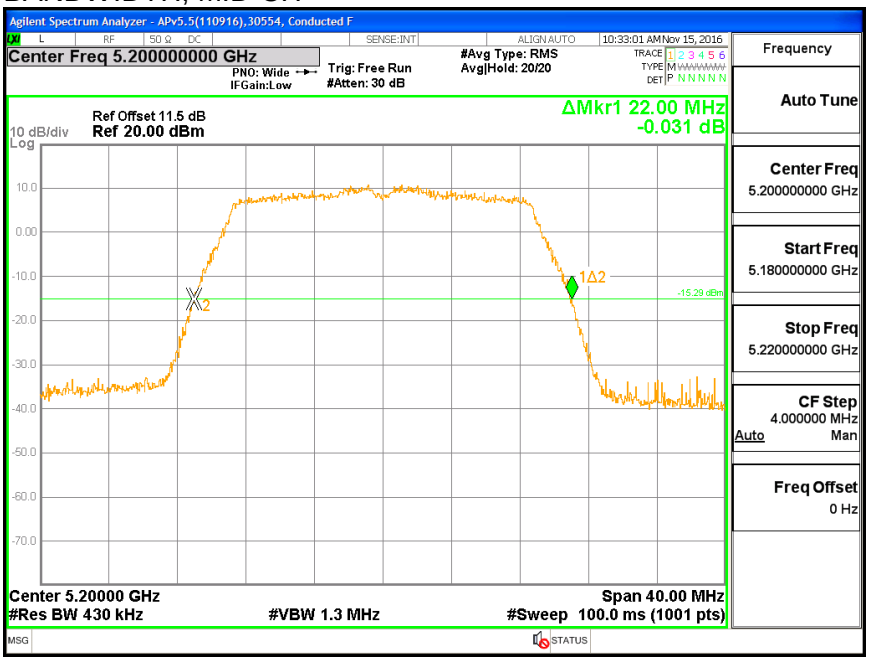

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

BANDWIDTH, HIGH CH

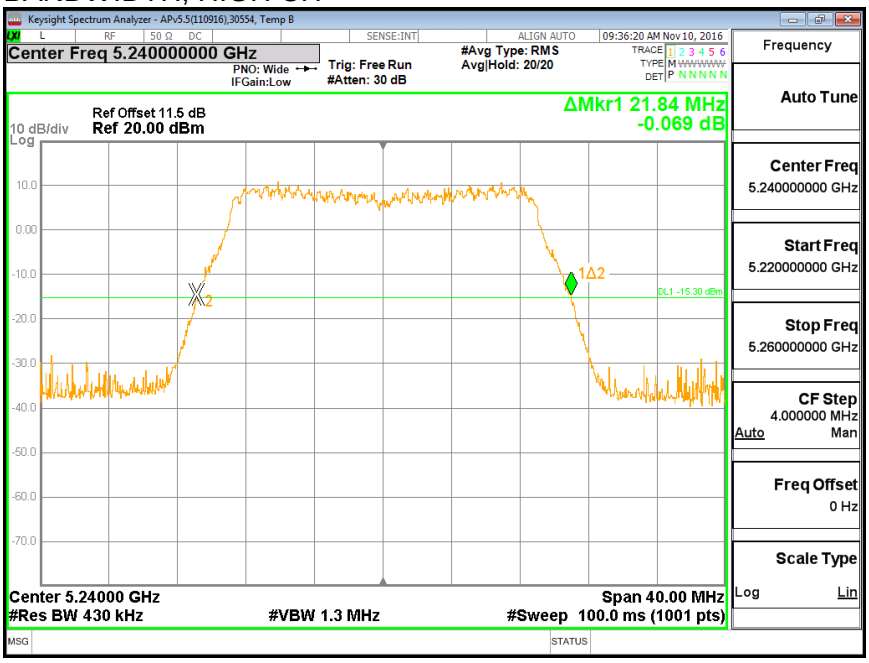

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.1.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% BW (MHz)
Low	5180	18.045
Mid	5200	17.677
High	5240	17.842

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

99% BANDWIDTH

99% BANDWIDTH, LOW CH

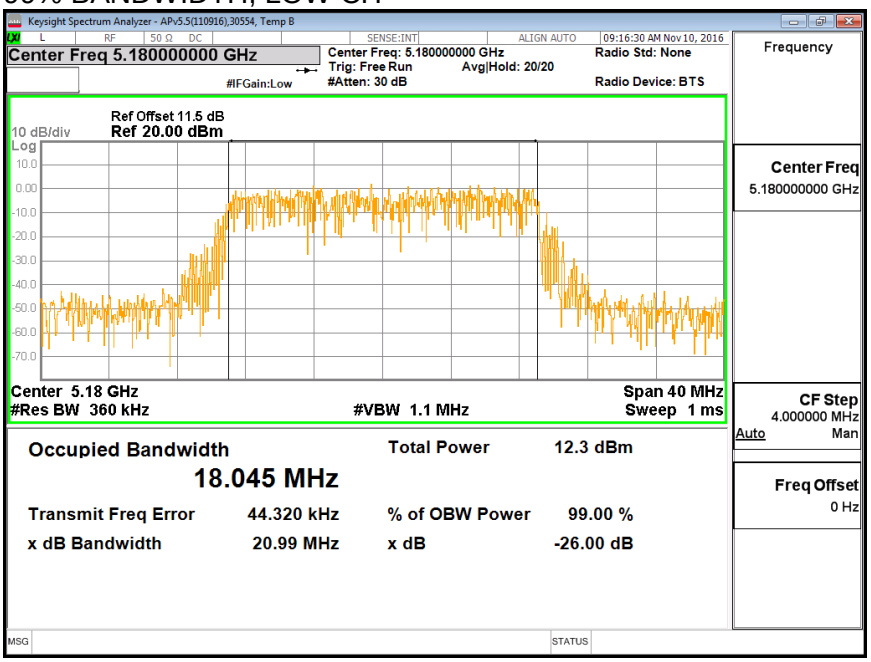

99% BANDWIDTH, MID CH

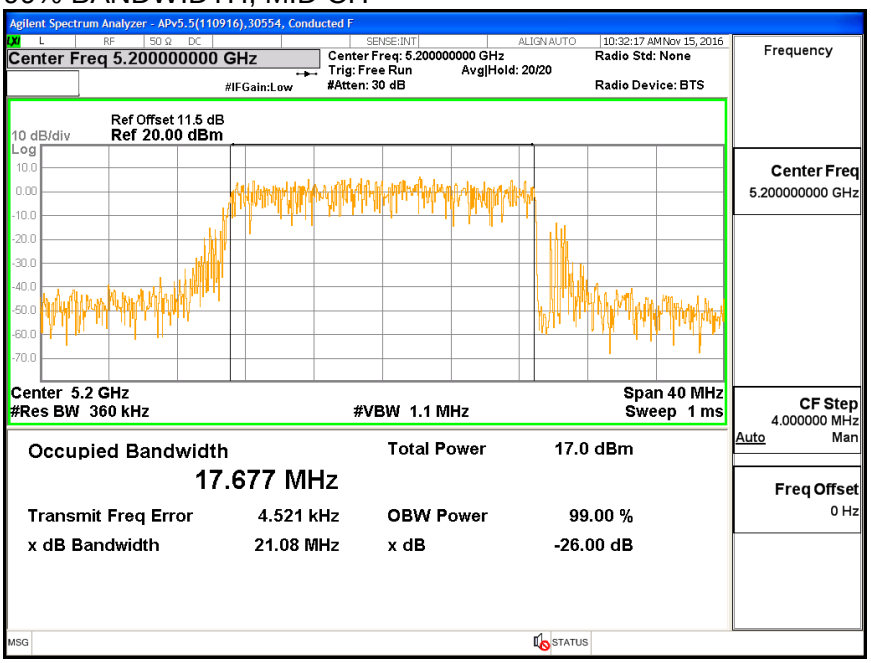

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

99% BANDWIDTH, HIGH CH

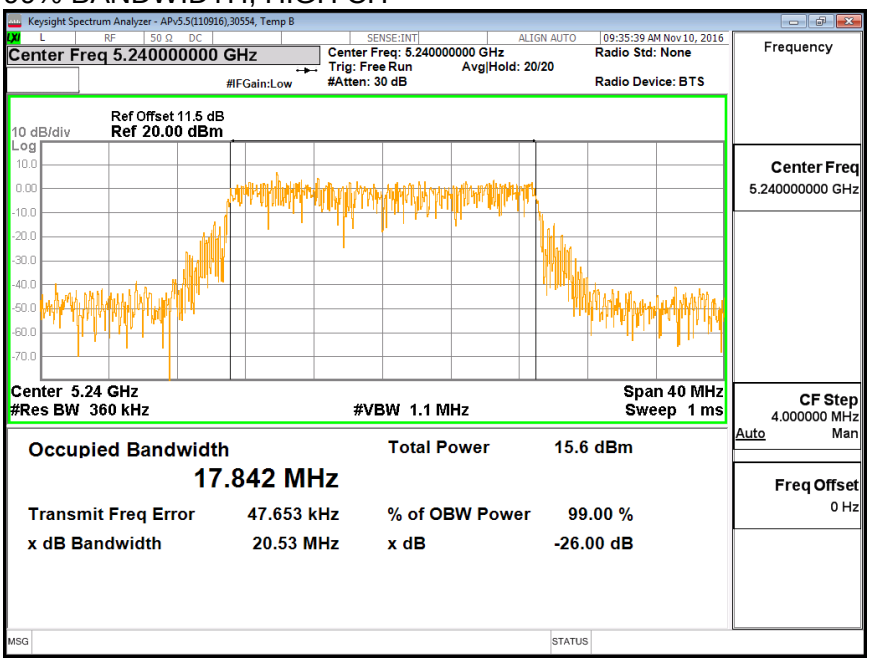

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701J
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.1.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	39472	Date:	12/14/16

Channel	Frequency (MHz)	Power (dBm)
Low	5180	15.96
Mid	5200	16.45
High	5240	16.47

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.1.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

RESULTS

ID:	39472	Date:	12/14/16

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5180	1.27	1.27	24.00	11.00
Mid	5200	1.27	1.27	24.00	11.00
High	5240	1.27	1.27	24.00	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD

Output Power Results

Channel	Frequency (MHz)	Antenna A Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	15.96	15.96	24.00	-8.04
Mid	5200	16.45	16.45	24.00	-7.55
High	5240	16.47	16.47	24.00	-7.53

PSD Results

Channel	Frequency (MHz)	Antenna A Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5180	6.01	6.01	11.00	-5.00
Mid	5200	5.98	5.98	11.00	-5.02
High	5240	5.88	5.88	11.00	-5.12

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

PSD

PSD, LOW CH

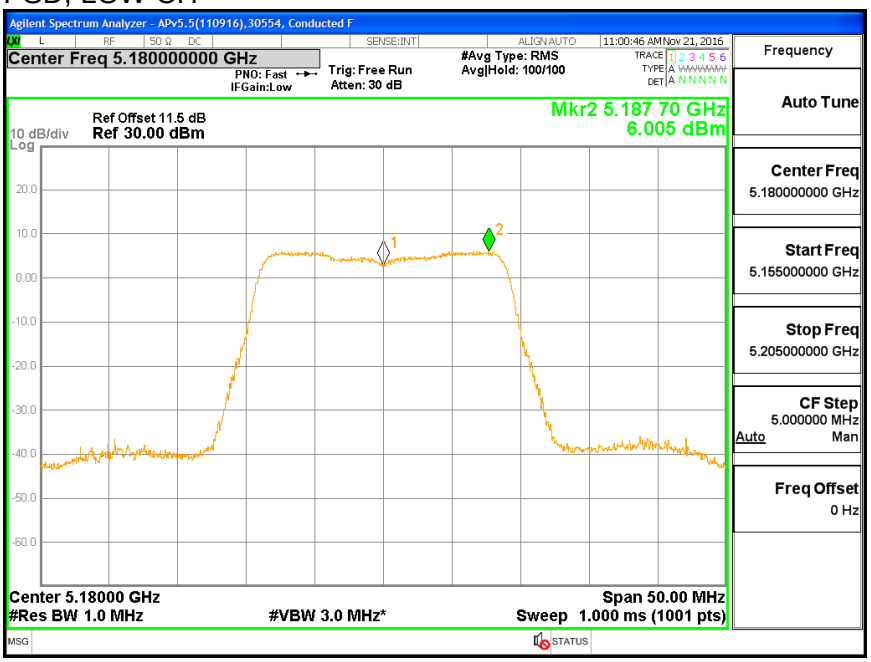

PSD, MID CH

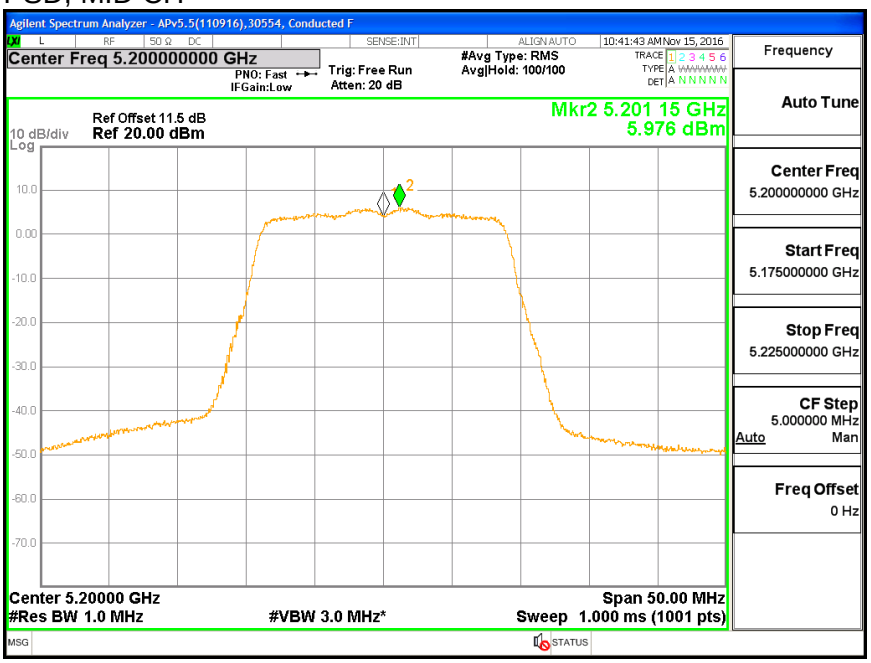

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

PSD, HIGH CH

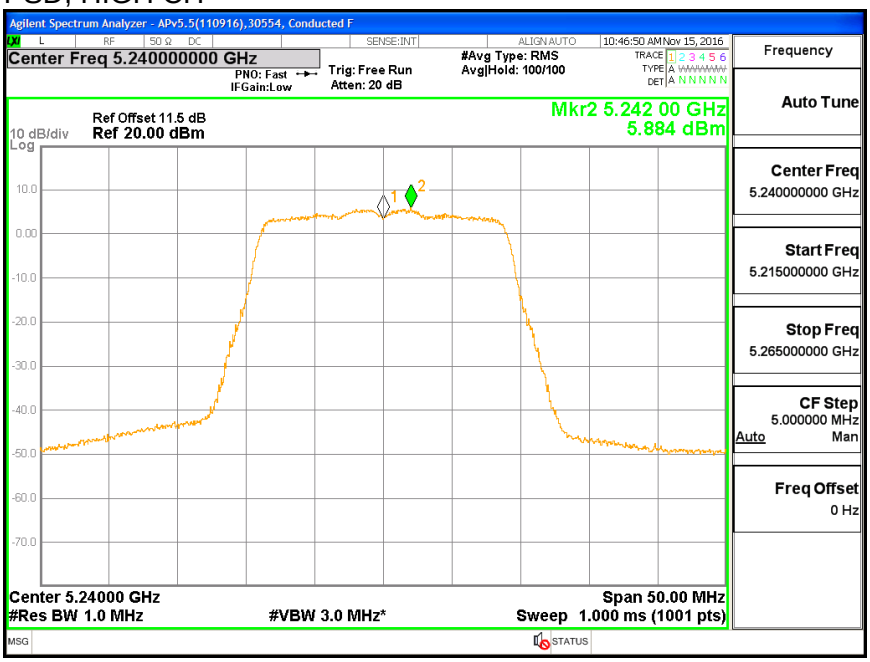

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.2. 802.11n HT20 ANTENNA B MODE IN THE 5.2 GHz BAND

8.2.1. 26 dB BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5180	21.840
Mid	5200	21.840
High	5240	21.720

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

26 dB BANDWIDTH

BANDWIDTH, LOW CH

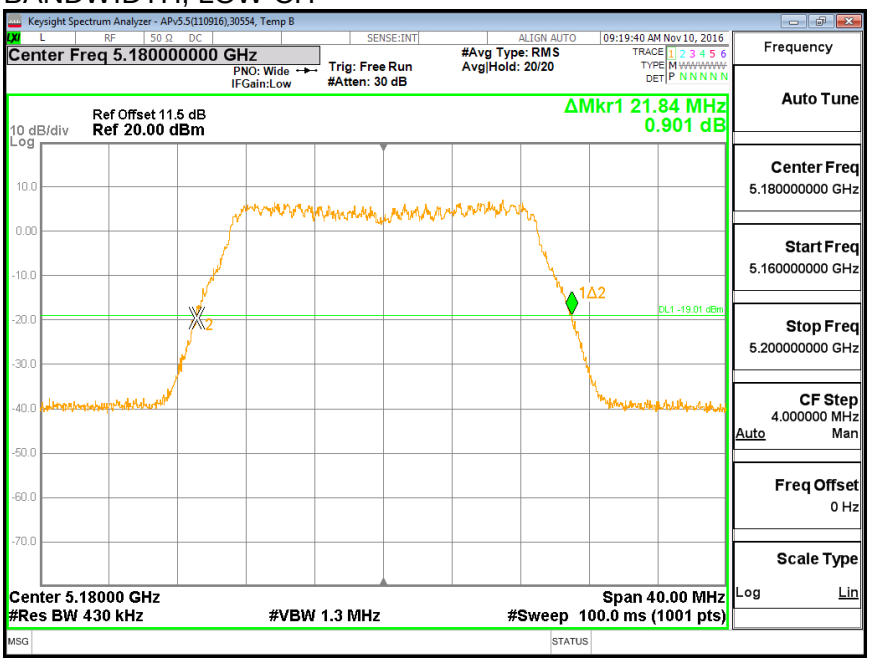

BANDWIDTH, MID CH

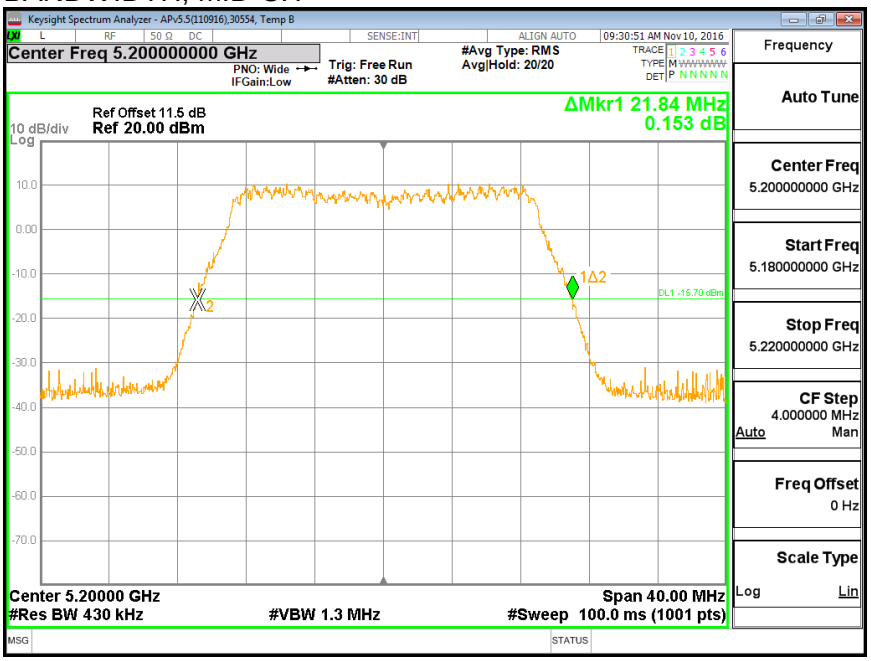

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

BANDWIDTH, HIGH CH

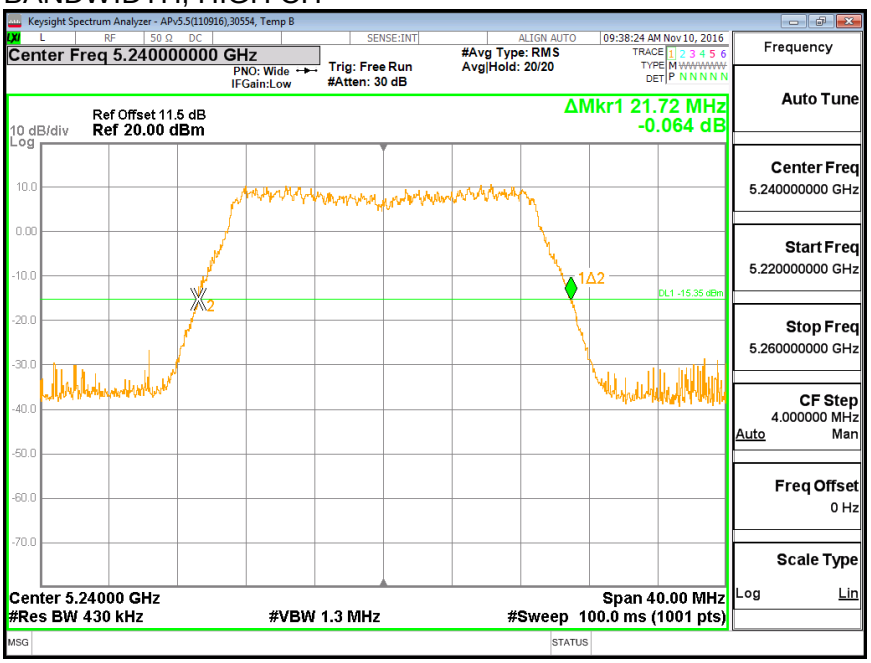

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.2.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% BW (MHz)
Low	5180	17.873
Mid	5200	17.863
High	5240	17.808

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

99% BANDWIDTH

99% BANDWIDTH, LOW CH

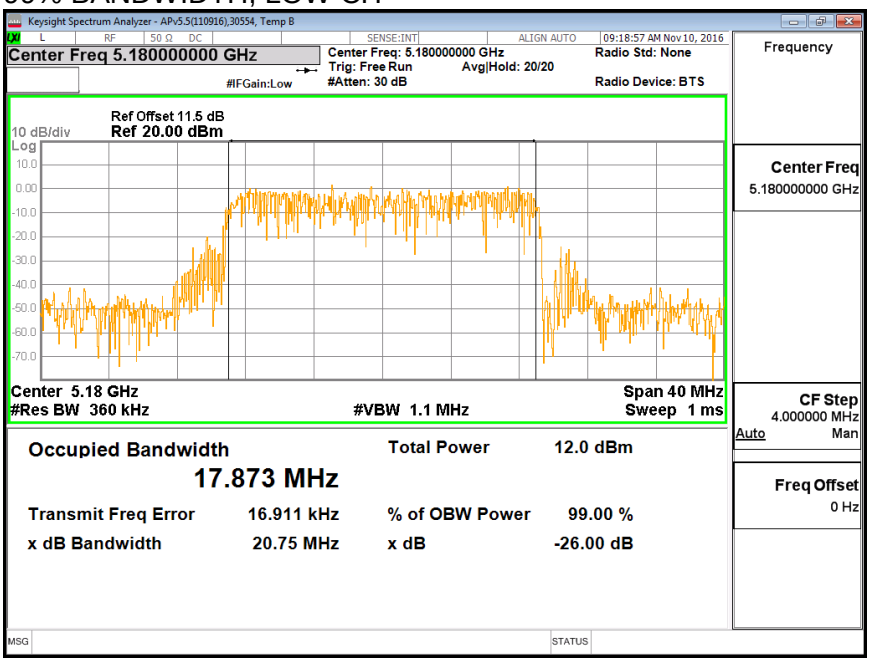

99% BANDWIDTH, MID CH

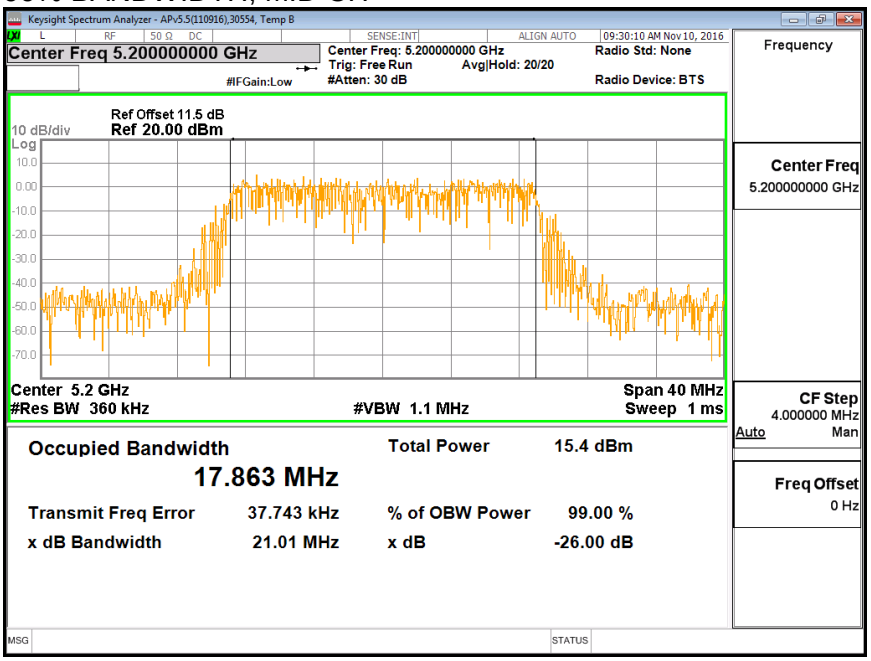

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

99% BANDWIDTH, HIGH CH

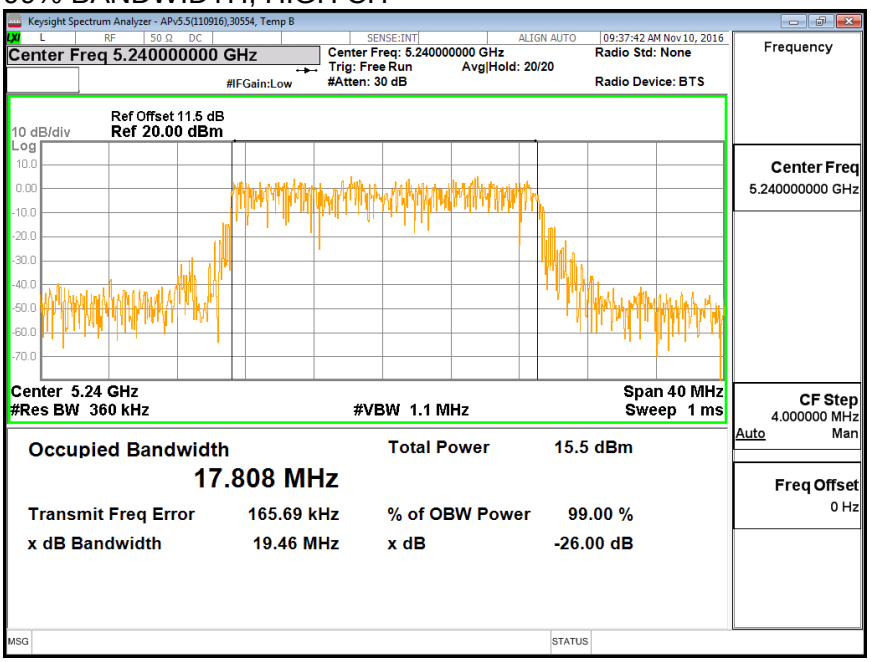

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701J
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.2.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	39472	Date:	12/14/16

Channel	Frequency (MHz)	Power (dBm)
Low	5180	16.00
Mid	5200	16.49
High	5240	16.45

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701J
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.2.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

RESULTS

ID:	39472	Date:	12/14/16

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5180	2.64	2.64	24.00	11.00
Mid	5200	2.64	2.64	24.00	11.00
High	5240	2.64	2.64	24.00	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD

Output Power Results

Channel	Frequency (MHz)	Antenna B Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	16.00	16.00	24.00	-8.00
Mid	5200	16.49	16.49	24.00	-7.51
High	5240	16.45	16.45	24.00	-7.55

PSD Results

Channel	Frequency (MHz)	Antenna B Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5180	6.03	6.03	11.00	-4.97
Mid	5200	6.00	6.00	11.00	-5.00
High	5240	5.71	5.71	11.00	-5.29

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

PSD

PSD, LOW CH

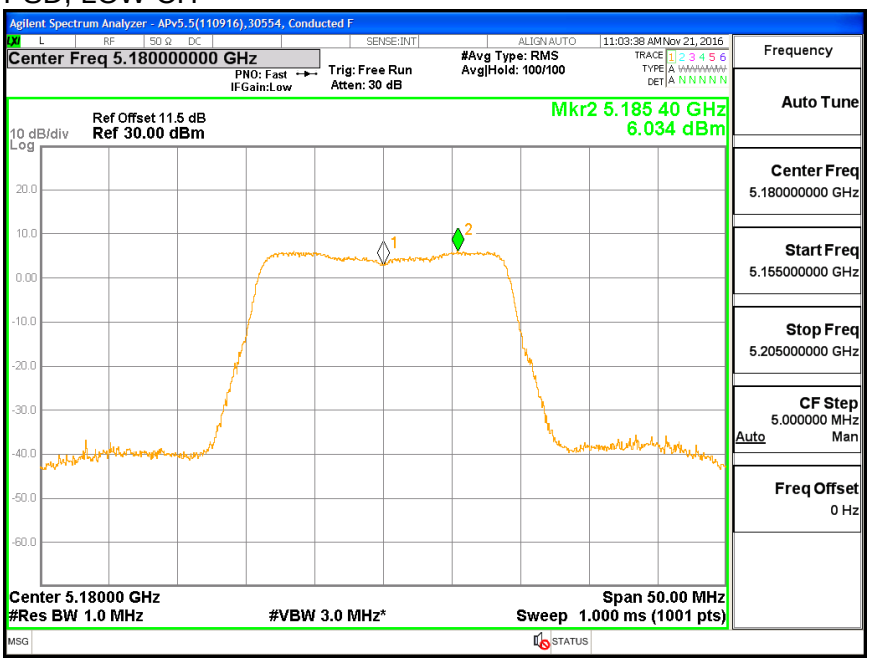

PSD, MID CH

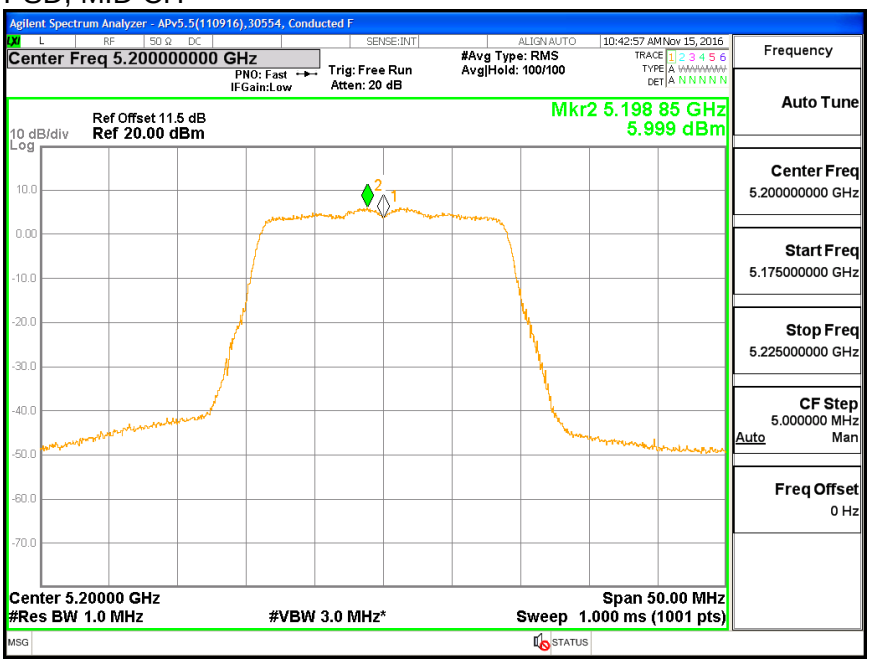

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701J
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

PSD, HIGH CH

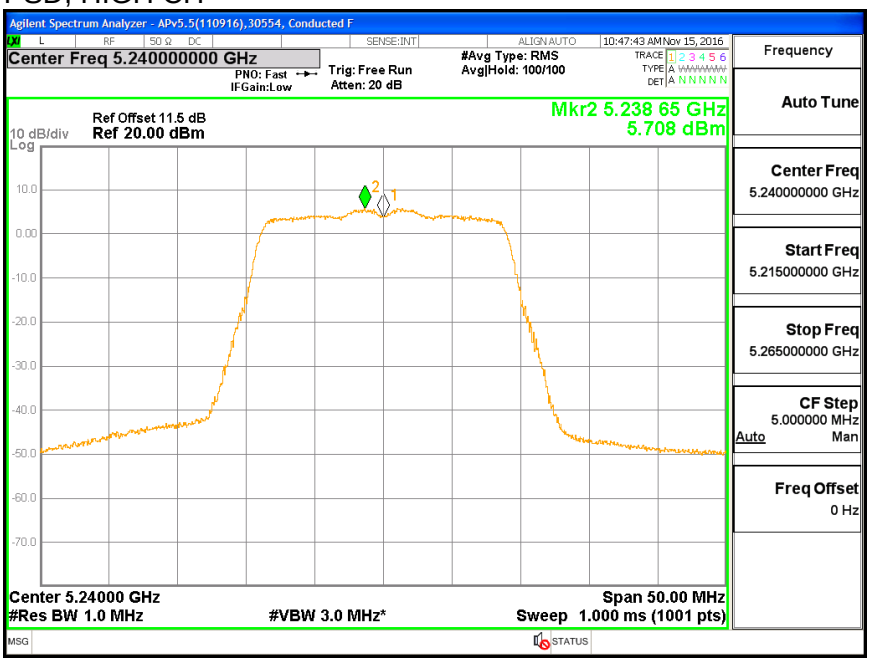

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.3. 802.11n HT20 2Tx (ANTENNA A + ANTENNA B) CDD MODE IN THE 5.2 GHz BAND

8.3.1. 26 dB BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB BW Antenna A (MHz)	26 dB BW Antenna B (MHz)
Low	5180	21.760	21.840
Mid	5200	21.880	21.920
High	5240	21.880	21.840

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

26 dB BANDWIDTH, ANTENNA A

BANDWIDTH, LOW CH

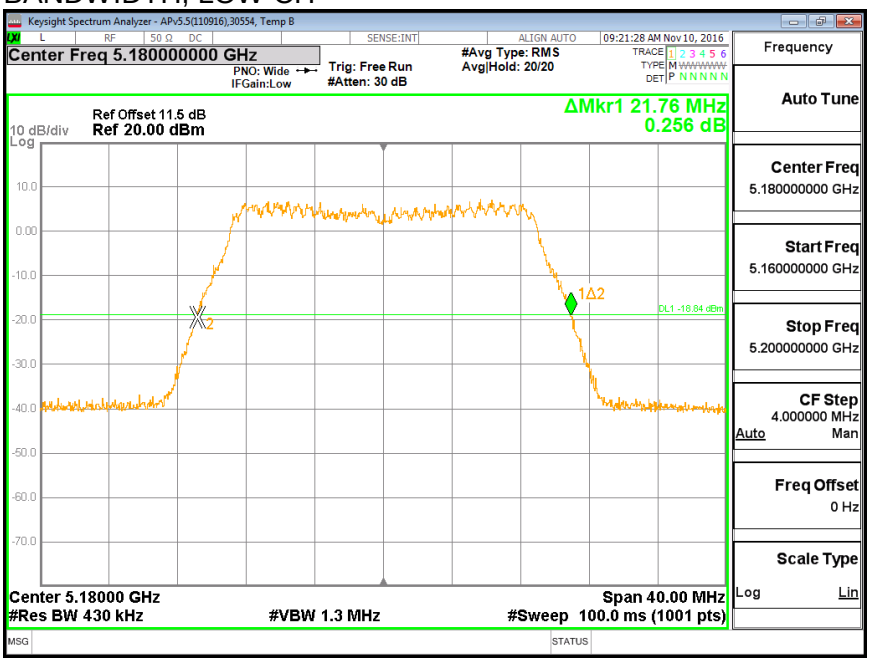

BANDWIDTH, MID CH

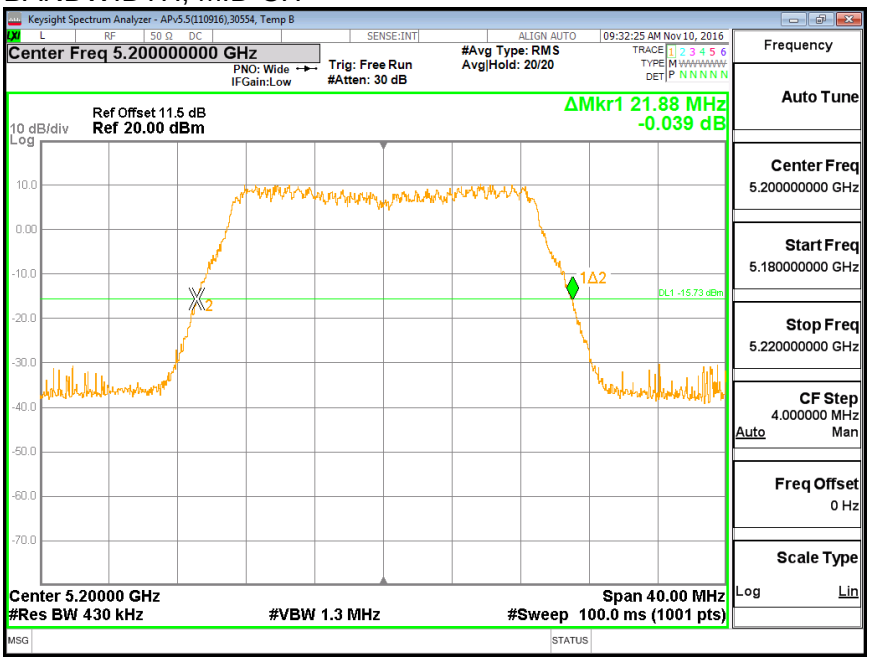

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

BANDWIDTH, HIGH CH

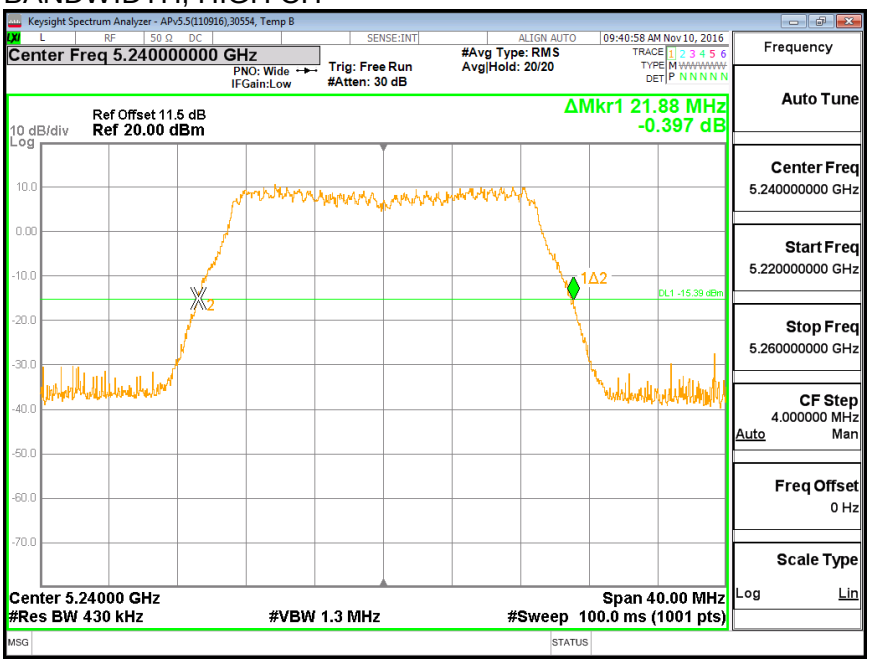

26 dB BANDWIDTH, ANTENNA B

BANDWIDTH, LOW CH

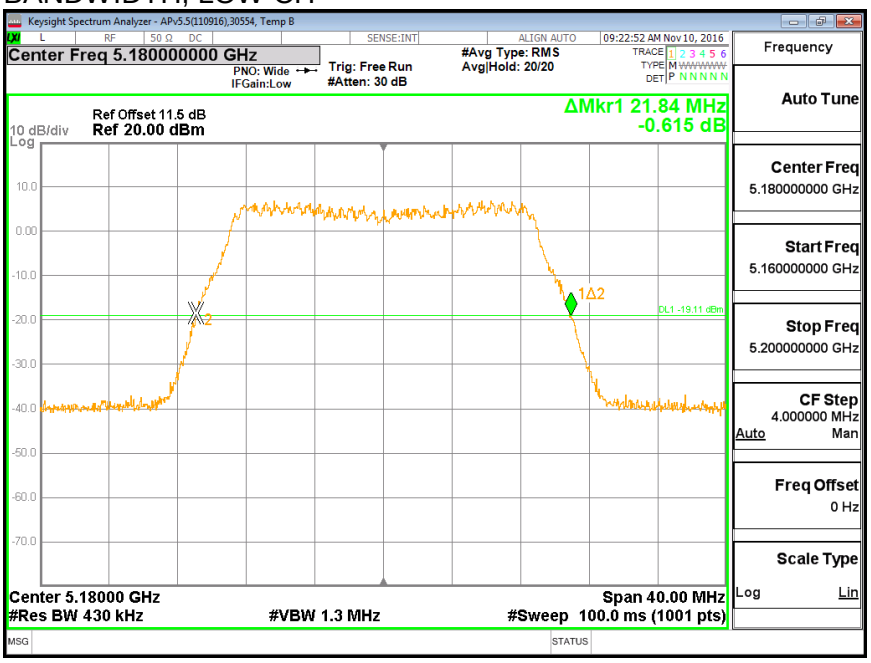

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

BANDWIDTH, MID CH

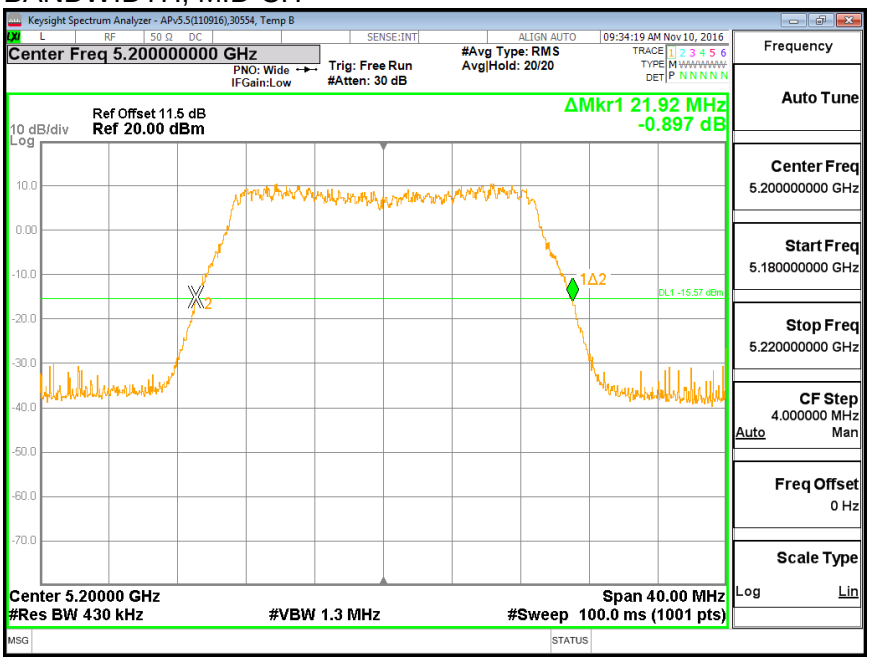

BANDWIDTH, HIGH CH

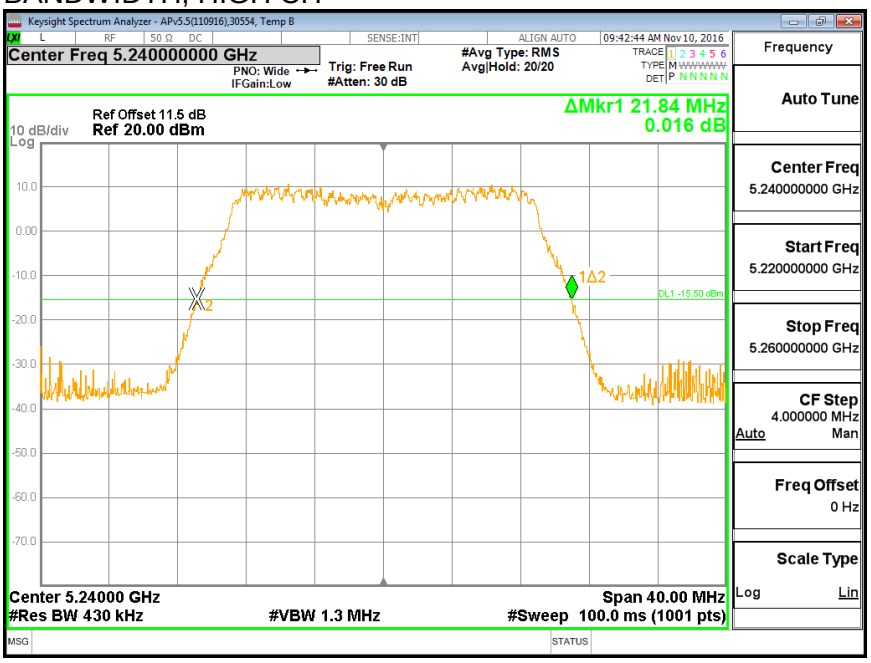

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.3.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% BW Antenna A (MHz)	99% BW Antenna B (MHz)
Low	5180	17.877	17.883
Mid	5200	17.882	18.043
High	5240	17.803	17.766

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

99% BANDWIDTH, ANTENNA A

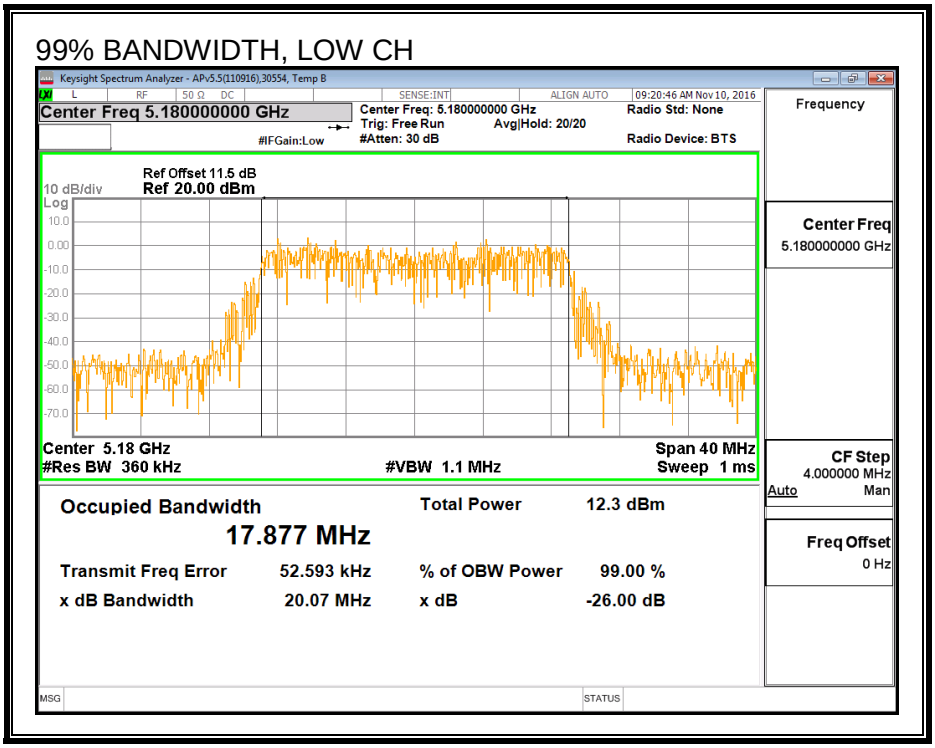

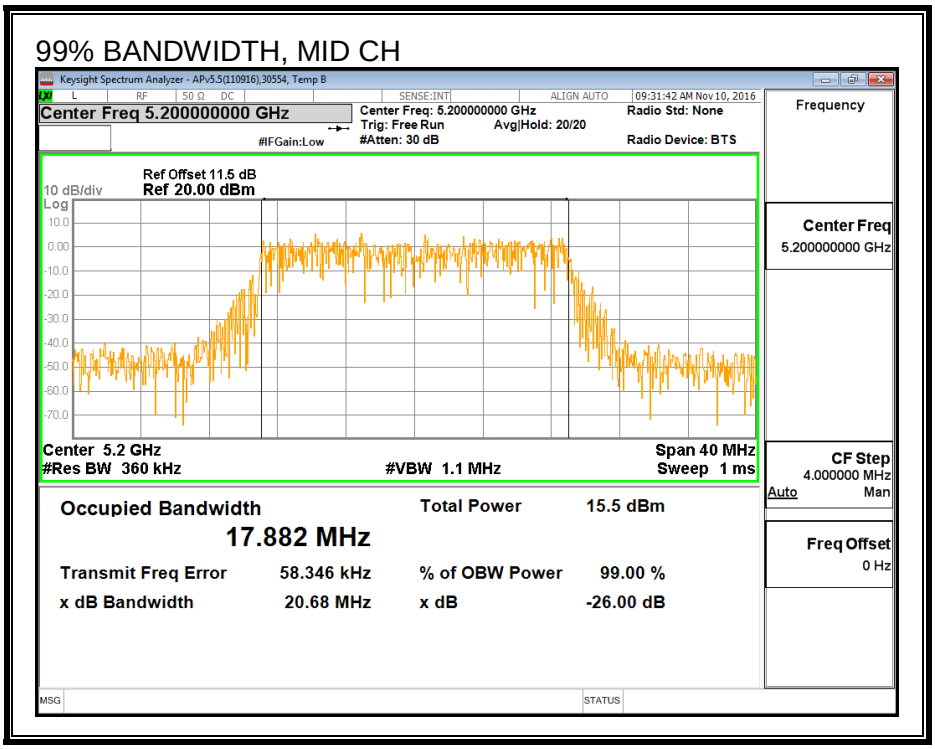

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

99% BANDWIDTH, HIGH CH

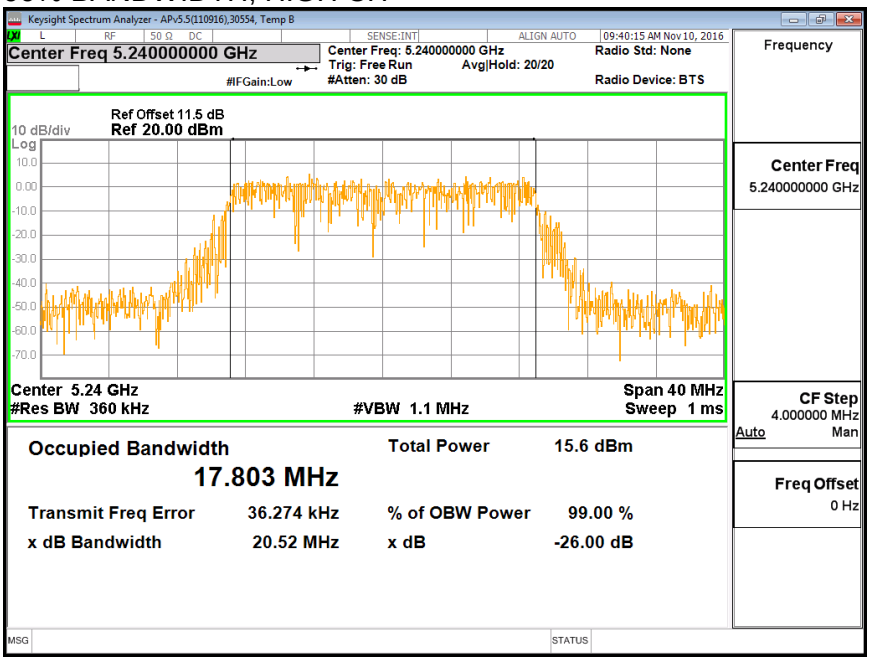

99% BANDWIDTH, ANTENNA B

99% BANDWIDTH, LOW CH

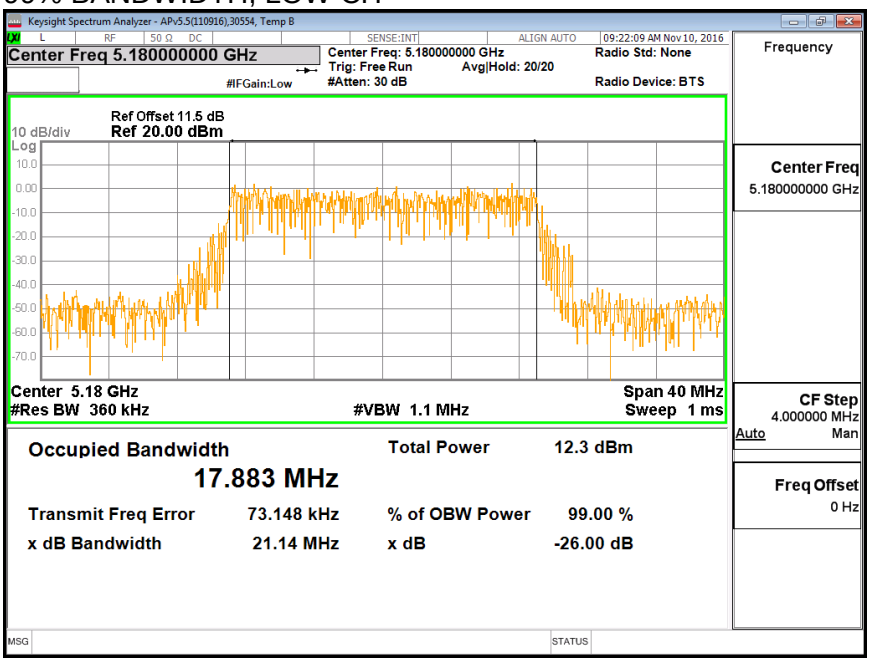

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

99% BANDWIDTH, MID CH

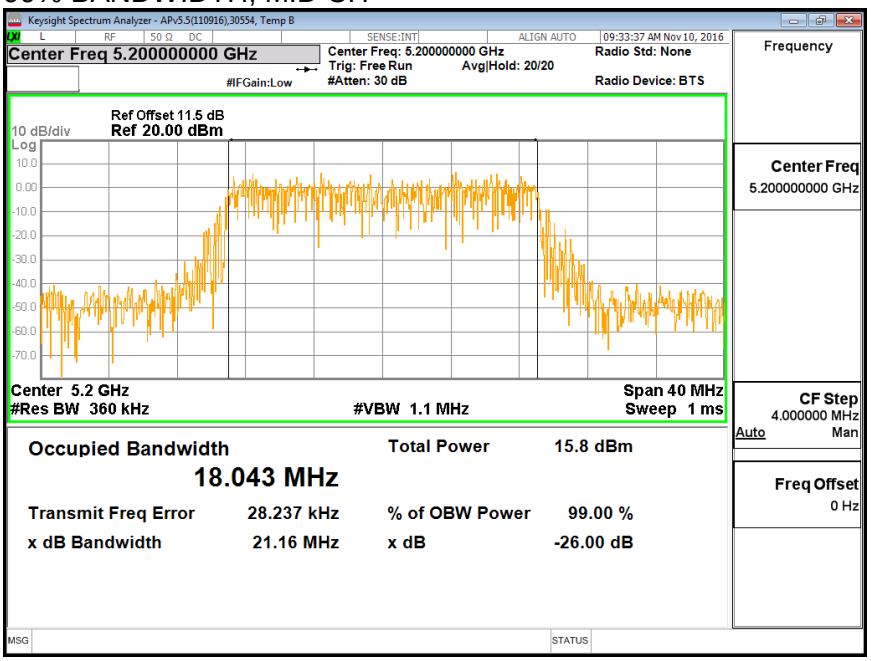

99% BANDWIDTH, HIGH CH

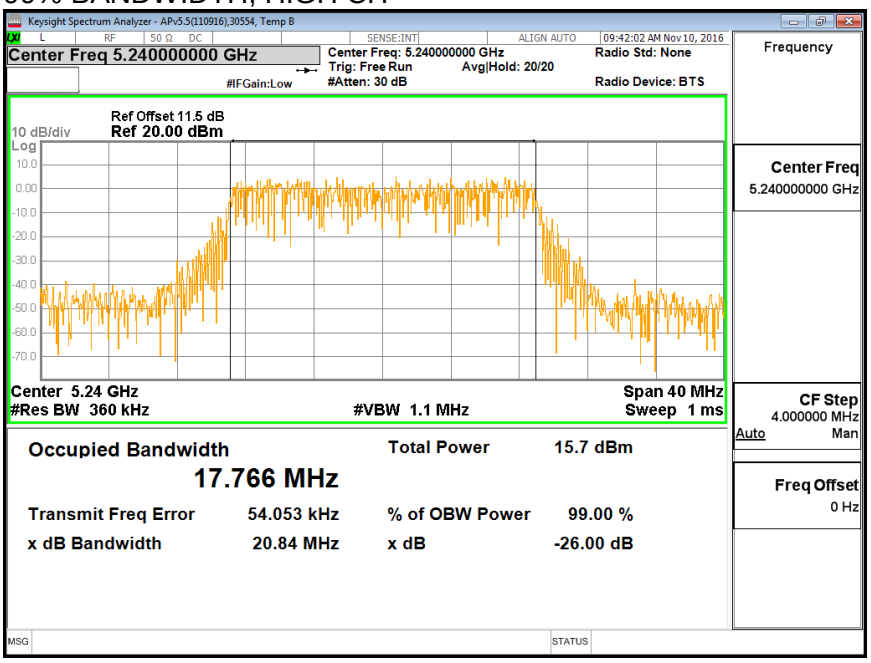

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.3.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	39472	Date:	12/14/16

Average Power Results

Channel	Frequency (MHz)	Antenna A Power (dBm)	Antenna B Power (dBm)	Total Power (dBm)
Low	5180	14.37	14.50	17.45
Mid	5200	16.34	16.47	19.42
High	5240	16.32	16.49	19.42

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.3.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701J
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Antenna A Gain (dBi)	Antenna B Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
1.27	2.64	2.01

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

Antenna A Gain (dBi)	Antenna B Gain (dBi)	Correlated Chains Directional Gain (dBi)
1.27	2.64	4.99

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

RESULTS

ID:	39472	Date:	12/14/16

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5180	2.01	4.99	24.00	11.00
Mid	5200	2.01	4.99	24.00	11.00
High	5240	2.01	4.99	24.00	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD

Output Power Results

Channel	Frequency (MHz)	Antenna A Meas Power (dBm)	Antenna B Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	14.37	14.50	17.45	24.00	-6.55
Mid	5200	16.34	16.47	19.42	24.00	-4.58
High	5240	16.32	16.49	19.42	24.00	-4.58

PSD Results

Channel	Frequency (MHz)	Antenna A Meas PSD (dBm)	Antenna B Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5180	6.04	6.10	9.08	11.00	-1.92
Mid	5200	6.03	6.18	9.12	11.00	-1.88
High	5240	5.63	5.66	8.66	11.00	-2.34

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

PSD, ANTENNA A

PSD, LOW CH

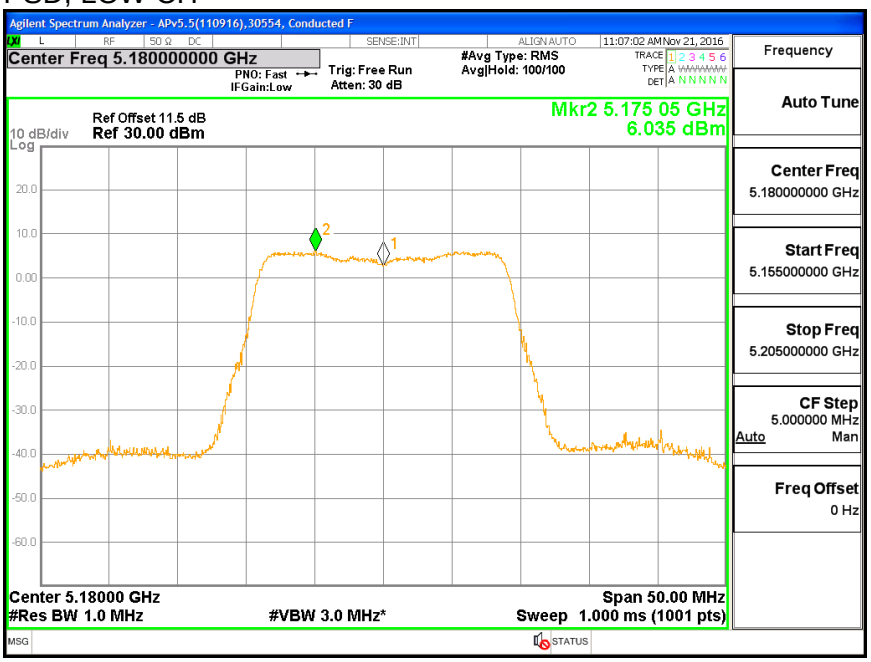

PSD, MID CH

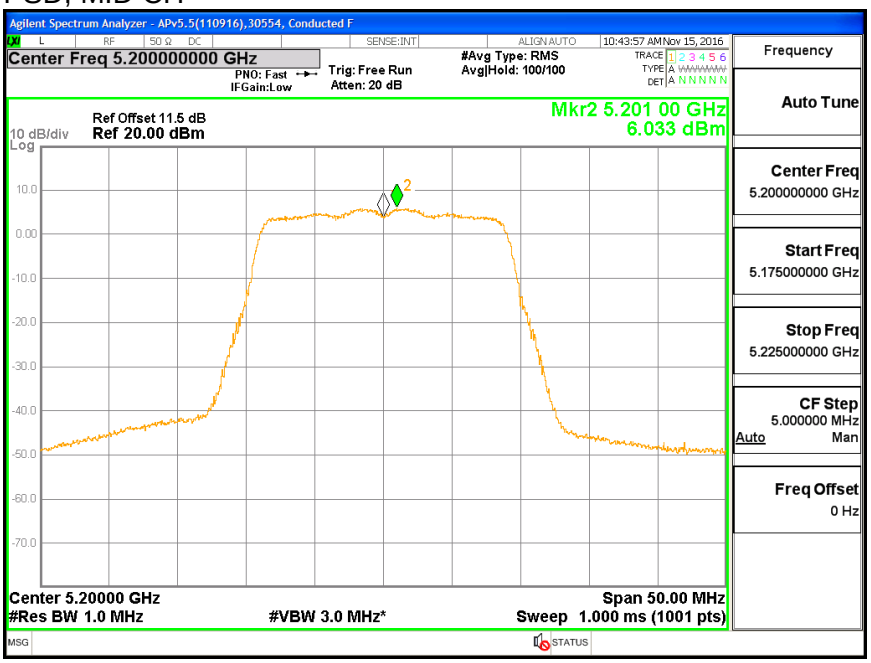

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

PSD, HIGH CH

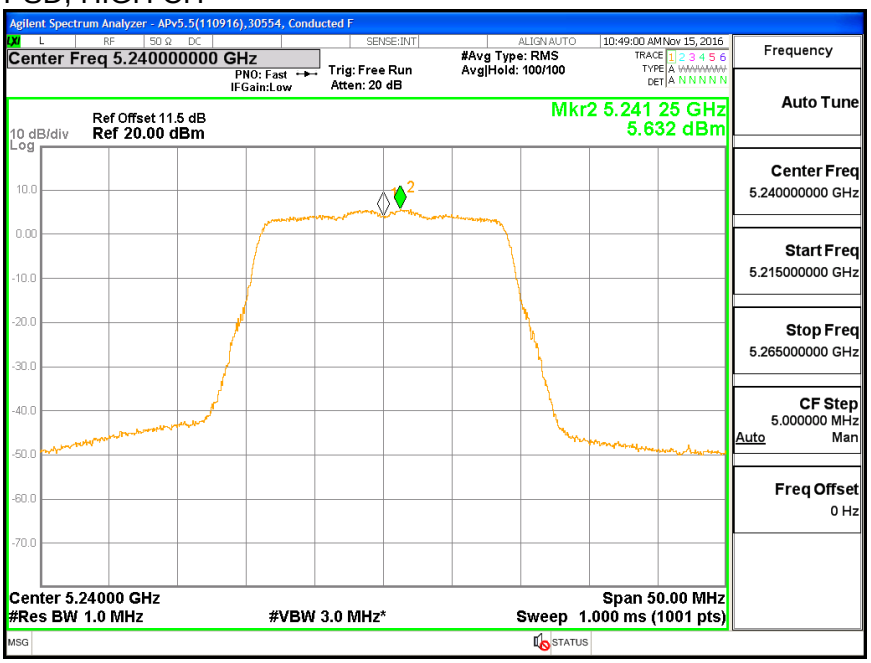

PSD, ANTENNA B

PSD, LOW CH

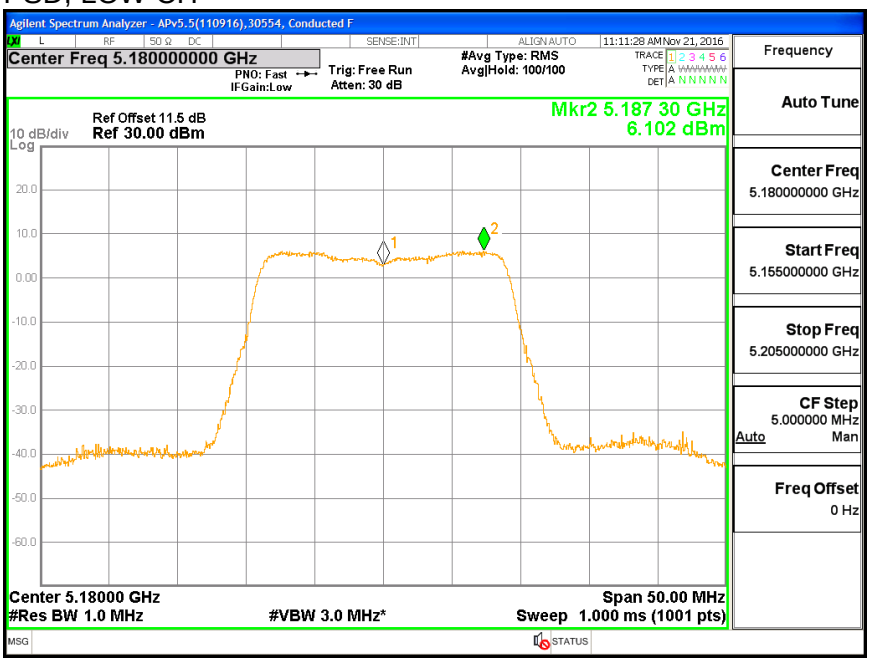

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

PSD, MID CH

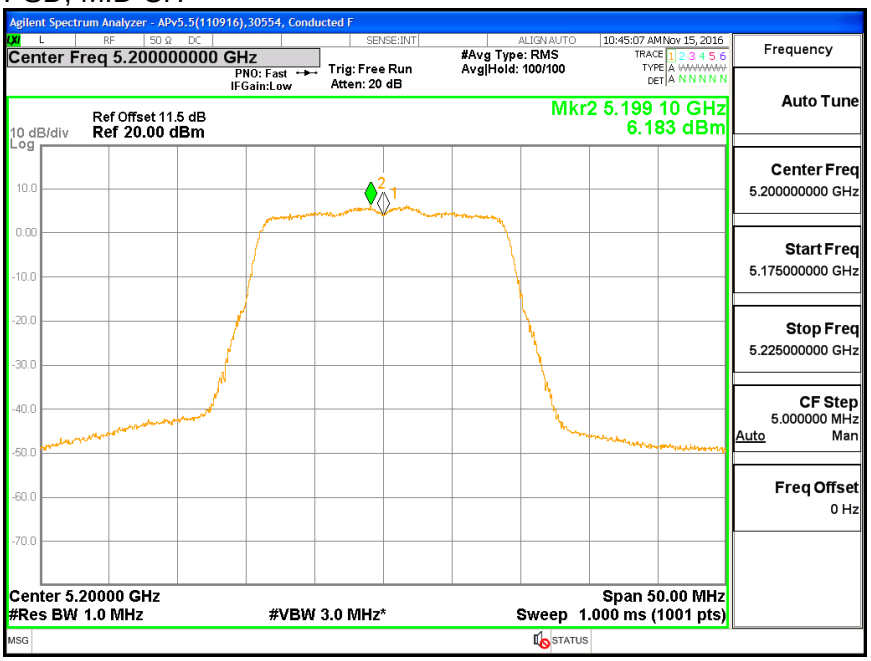

PSD, HIGH CH

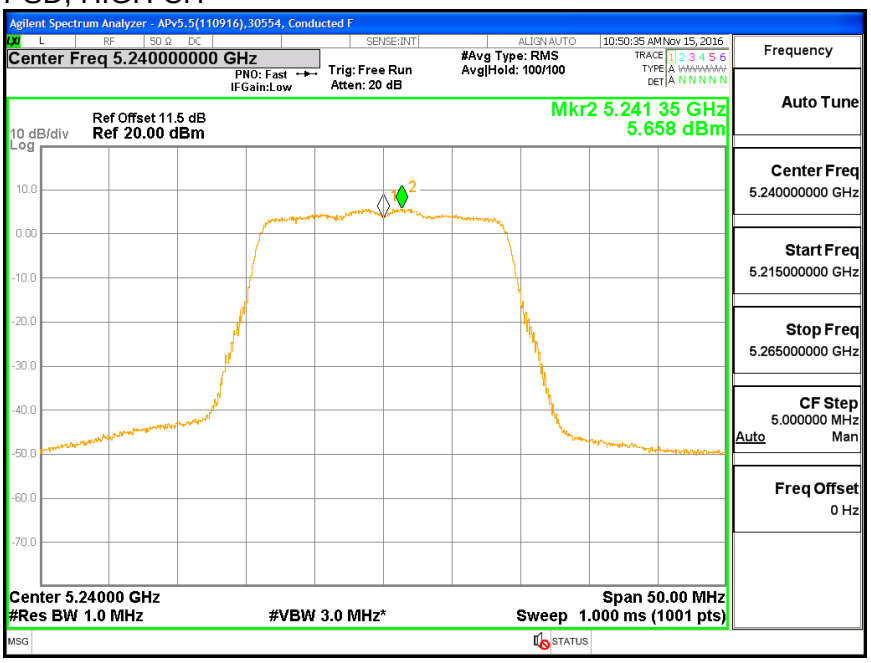

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.4. 802.11n HT20 2Tx (ANTENNA A + ANTENNA B) STBC MODE IN THE 5.2 GHz BAND

Noted: Covered by 802.11n HT20 2Tx (ANTENNA A + ANTENNA B) CDD MODE IN THE 5.2 GHz BAND

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.5. 802.11n HT40 ANTENNA A MODE IN THE 5.2 GHz BAND

8.5.1. 26 dB BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5190	40.400
High	5230	40.640

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701J
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

26 dB BANDWIDTH

BANDWIDTH, LOW CH

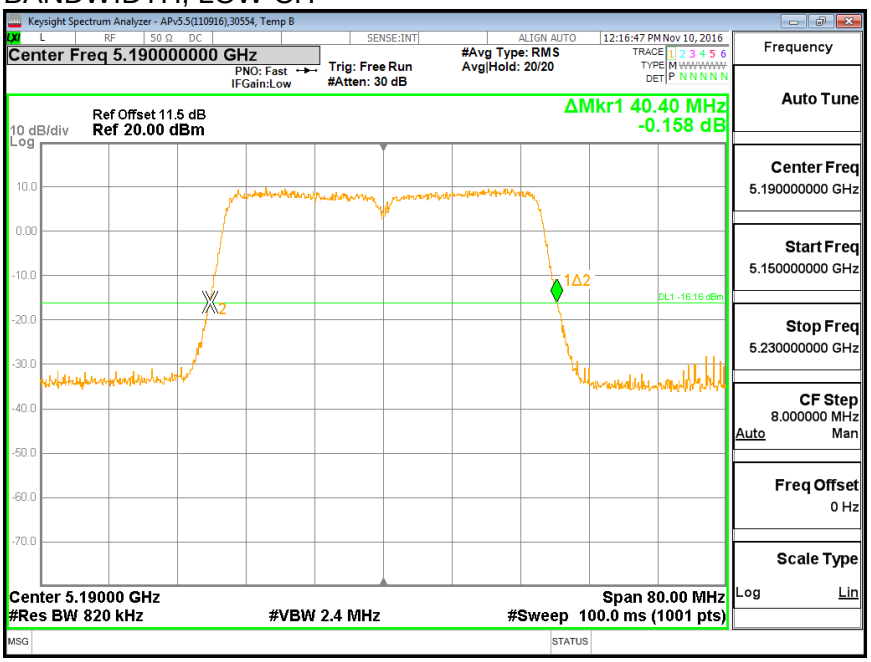

BANDWIDTH, HIGH CH

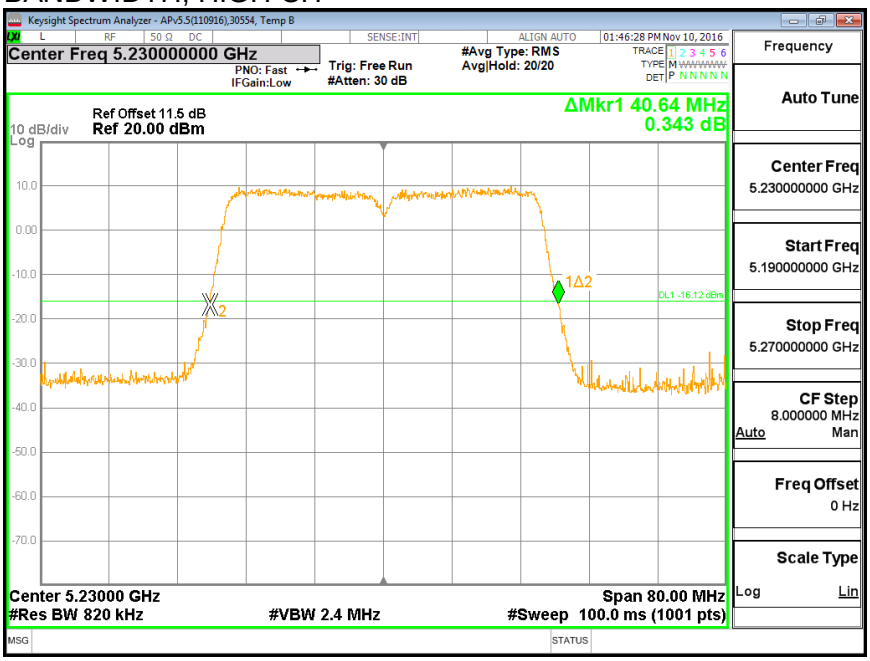

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.5.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5190	36.482
High	5230	36.424

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

99% BANDWIDTH

99% BANDWIDTH, LOW CH

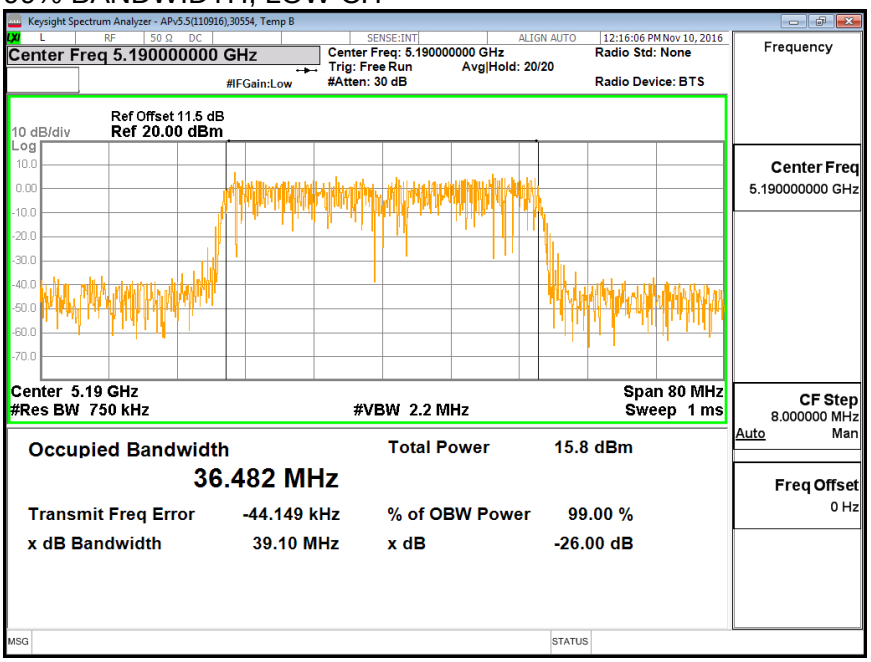

99% BANDWIDTH, HIGH CH

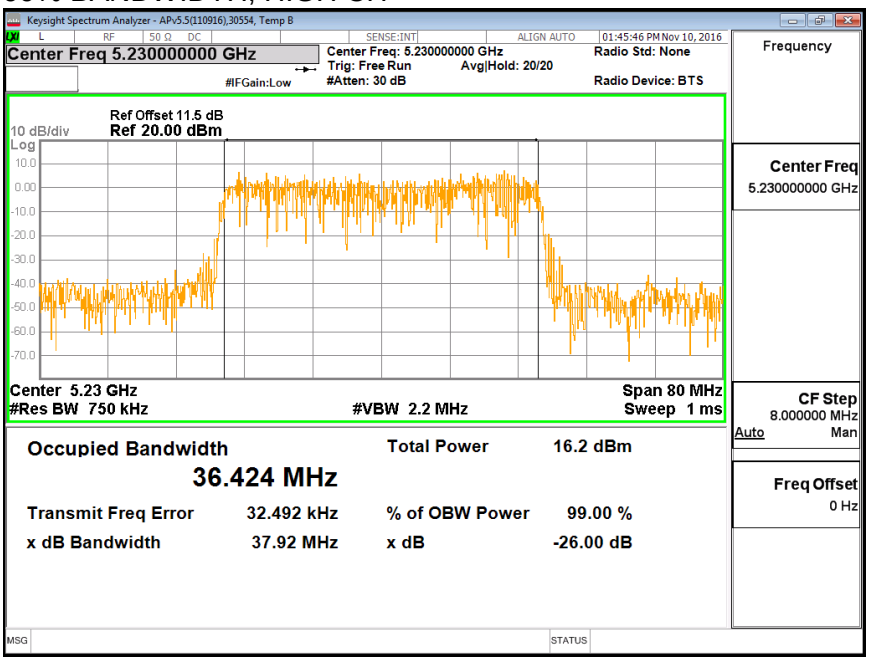

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.5.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	39472	Date:	12/14/16

Channel	Frequency (MHz)	Power (dBm)
Low	5190	14.36
High	5230	16.40

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701J
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.5.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

RESULTS

ID:	39472	Date:	12/14/16

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5190	1.27	1.27	24.00	11.00
High	5230	1.27	1.27	24.00	11.00

Duty Cycle CF (dB)	0.10	Included in Calculations of Corr'PSD

Output Power Results

Channel	Frequency (MHz)	Antenna A Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	14.36	14.36	24.0	-9.64
High	5230	16.40	16.40	24.0	-7.60

PSD Results

Channel	Frequency (MHz)	Antenna A Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5190	2.870	2.97	11.00	-8.03
High	5230	2.887	2.99	11.00	-8.01

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

PSD

PSD, LOW CH

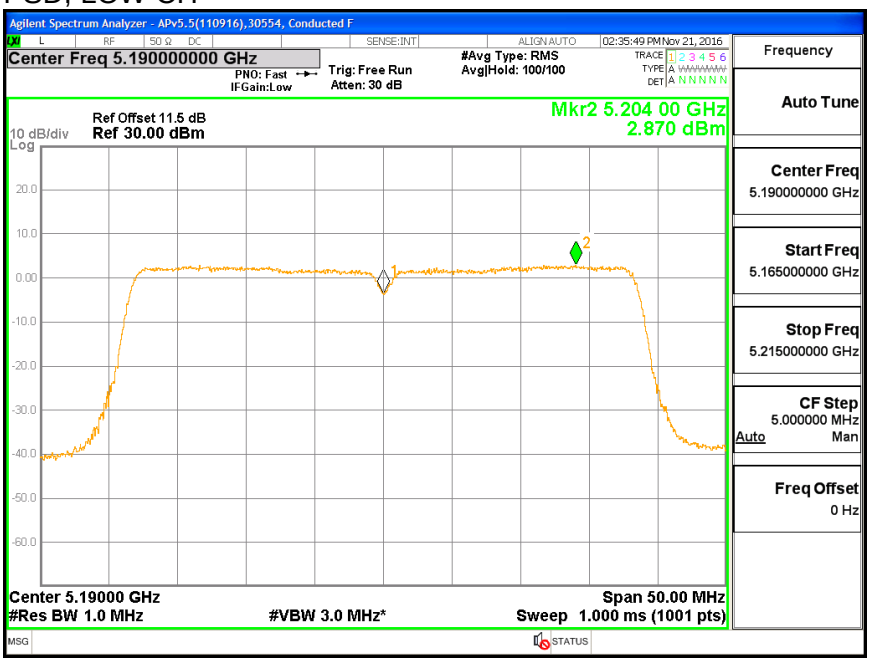

PSD, HIGH CH

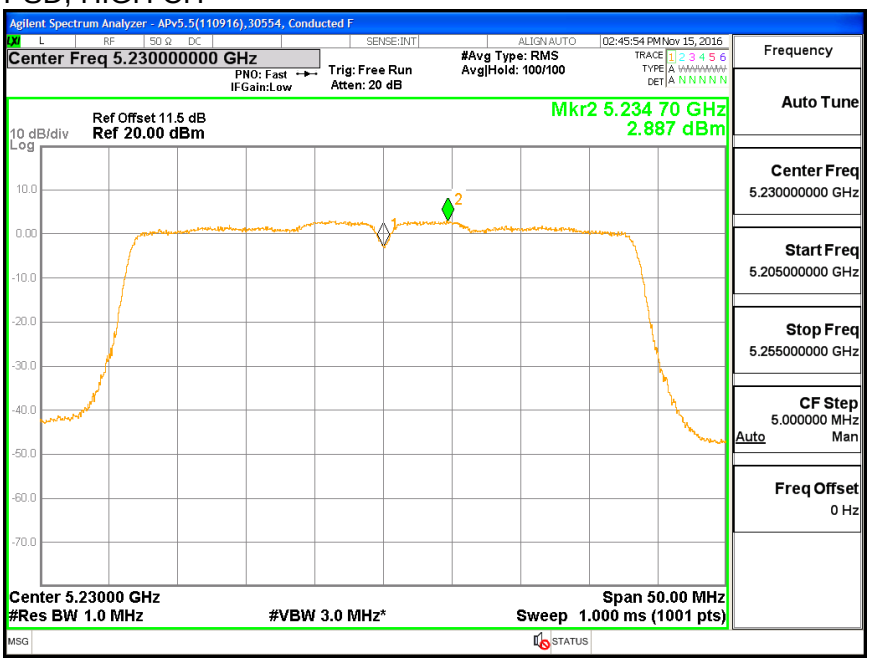

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701J
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.6. 802.11n HT40 ANTENNA B MODE IN THE 5.2 GHz BAND

8.6.1. 26 dB BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5190	40.480
High	5230	40.560

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

26 dB BANDWIDTH

BANDWIDTH, LOW CH

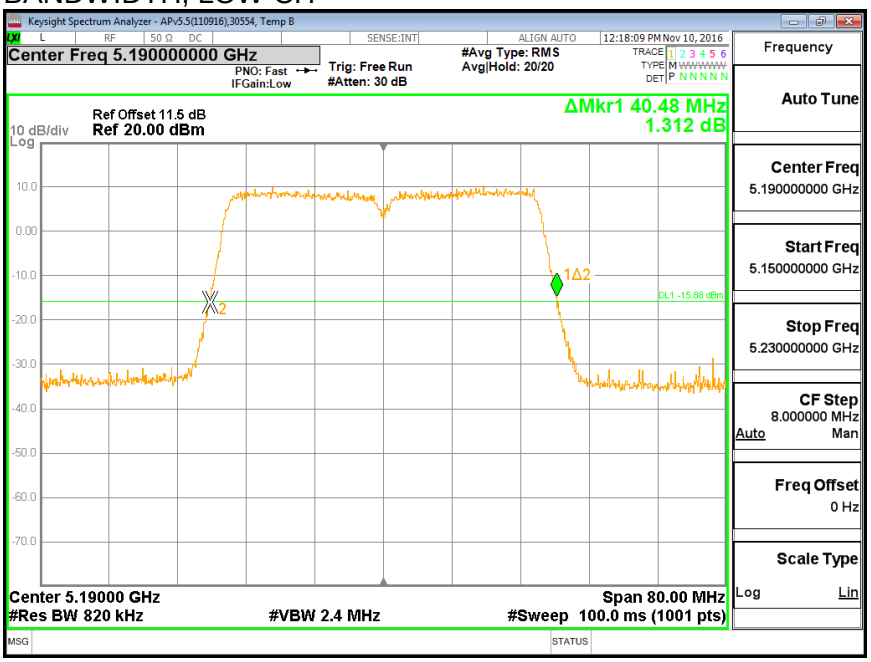

BANDWIDTH, HIGH CH

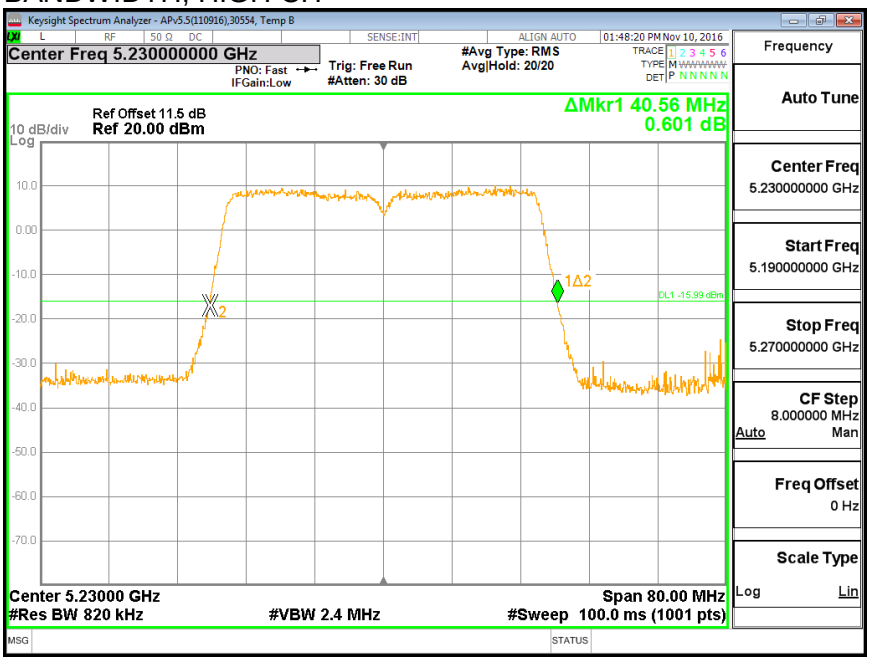

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.6.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5190	36.560
High	5230	36.459

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

99% BANDWIDTH

99% BANDWIDTH, LOW CH

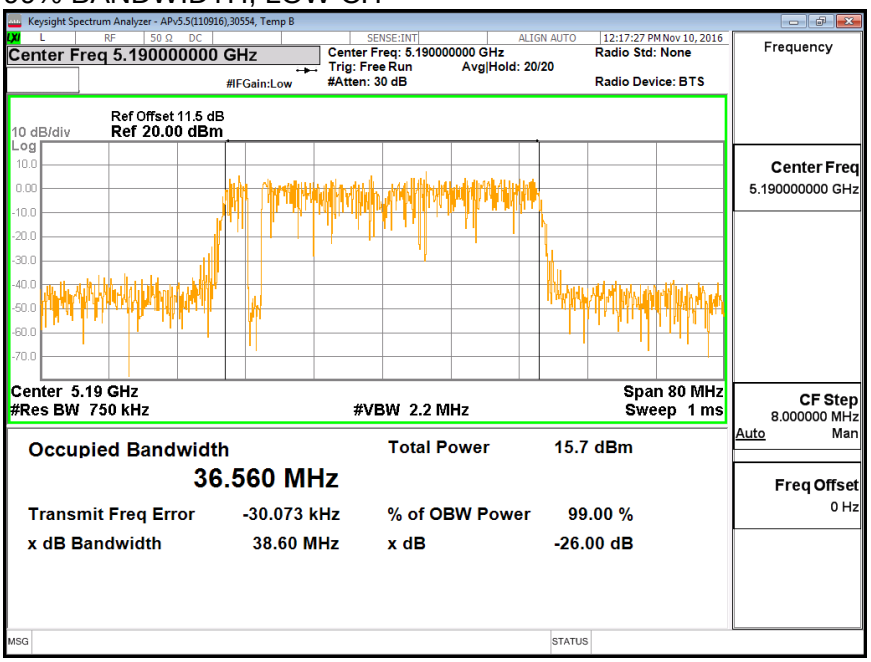

99% BANDWIDTH, HIGH CH

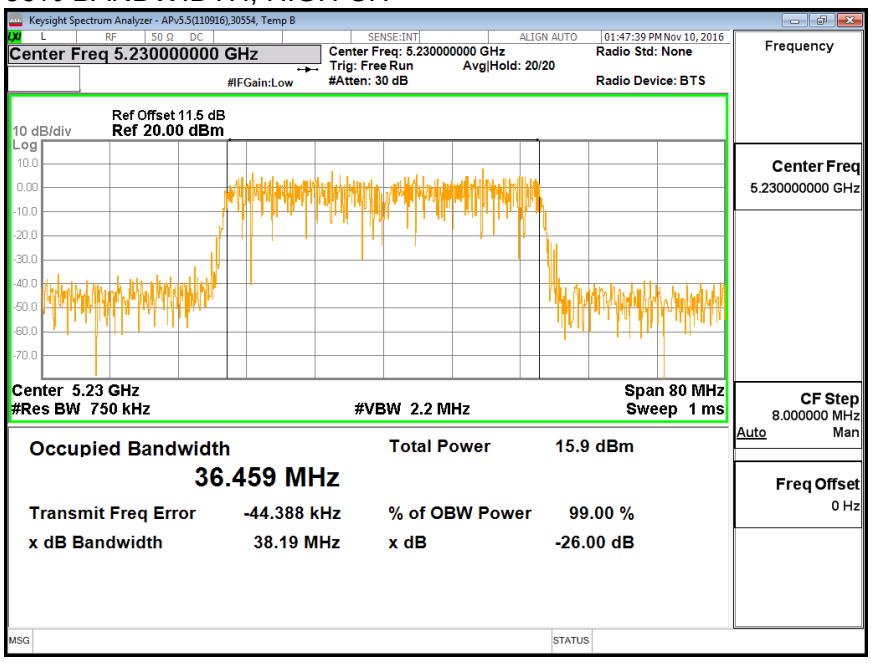

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.6.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	39472	Date:	12/14/16

Channel	Frequency (MHz)	Power (dBm)
Low	5190	14.29
High	5230	16.38

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701J
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.6.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

RESULTS

ID:	39472	Date:	12/14/16

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5190	2.64	2.64	24.00	11.00
High	5230	2.64	2.64	24.00	11.00

Duty Cycle CF (dB)	0.10	Included in Calculations of Corr'd PSD

Output Power Results

Channel	Frequency (MHz)	Antenna B Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	14.29	14.29	24.00	-9.71
High	5230	16.38	16.38	24.00	-7.62

PSD Results

Channel	Frequency (MHz)	Antenna B Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5190	2.794	2.89	11.00	-8.11
High	5230	3.169	3.27	11.00	-7.73

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

PSD

PSD, LOW CH

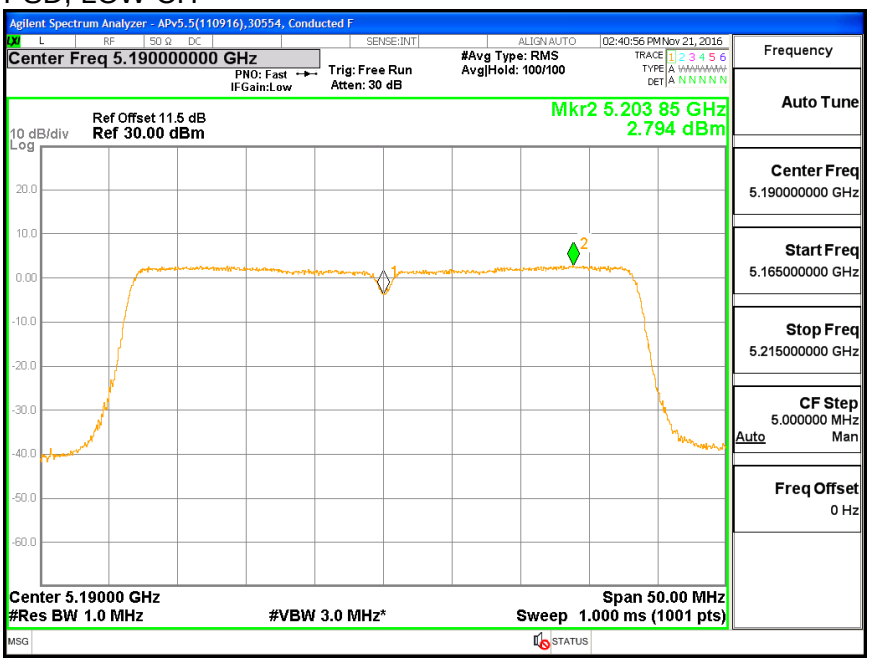

PSD, HIGH CH

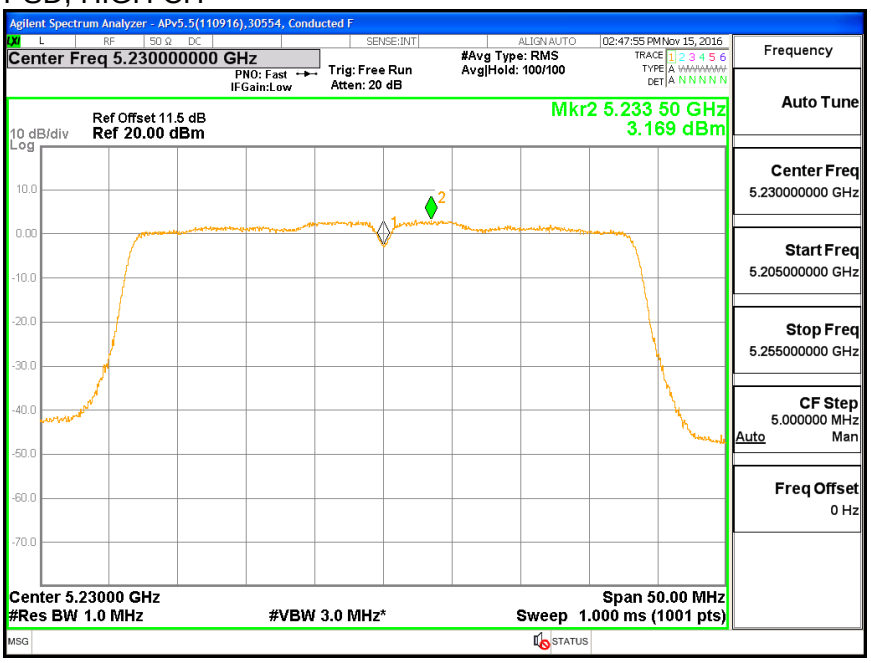

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.7. 802.11n HT40 2Tx (ANTENNA A + ANTENNA B) CDD MODE IN THE 5.2 GHz BAND

8.7.1. 26 dB BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB BW Antenna A (MHz)	26 dB BW Antenna B (MHz)
Low	5190	40.560	40.480
High	5230	40.480	40.400

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

26 DB BANDWIDTH, ANTENNA A

26 dB BANDWIDTH, LOW CH

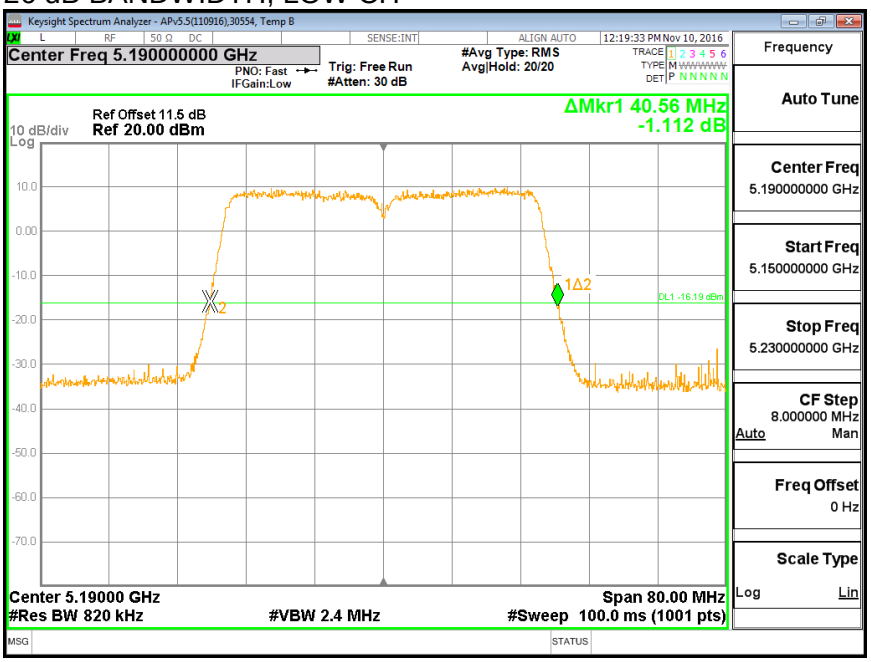

26 dB BANDWIDTH, HIGH CH

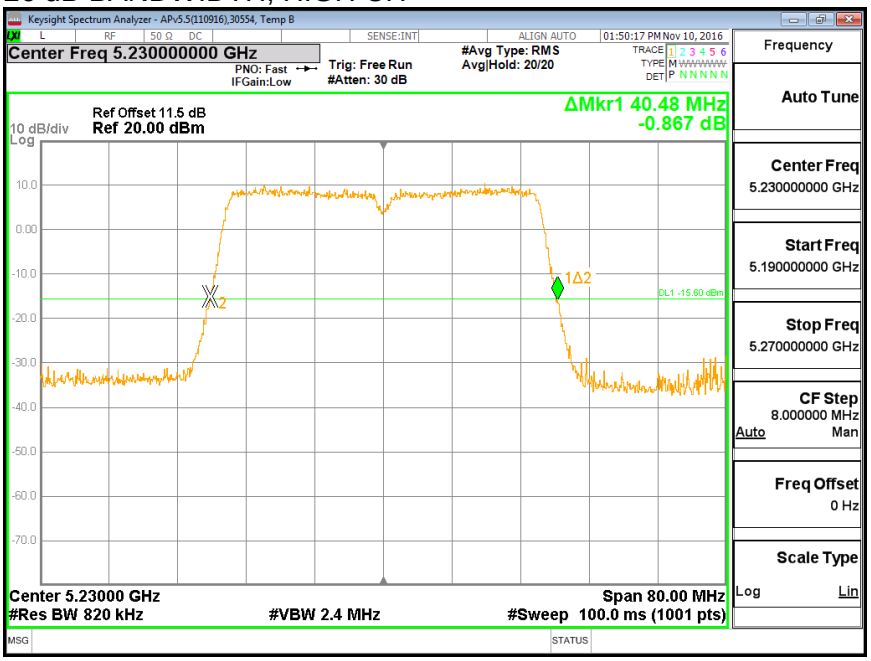

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

26 DB BANDWIDTH, ANTENNA B

26 dB BANDWIDTH, LOW CH

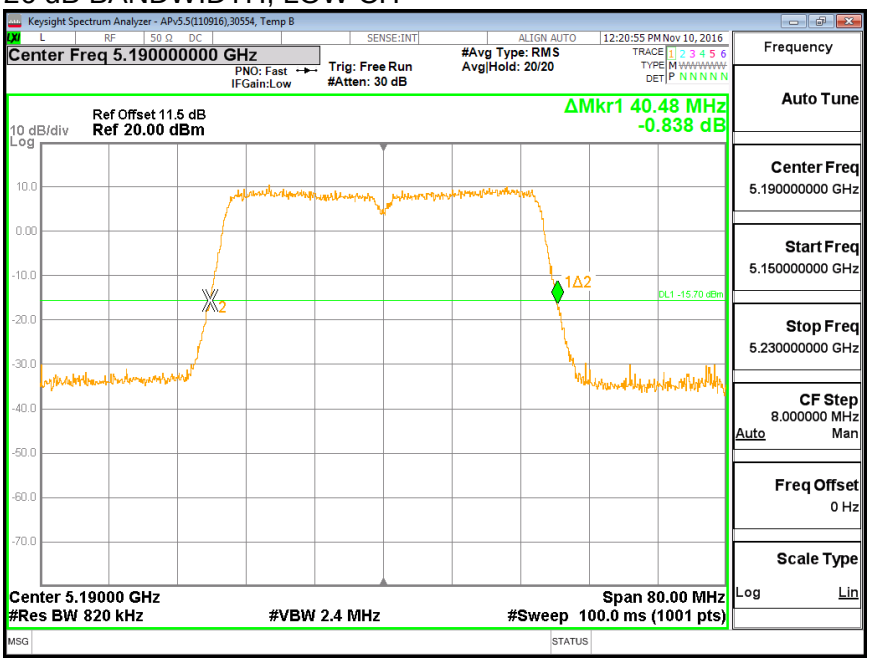

26 dB BANDWIDTH, HIGH CH

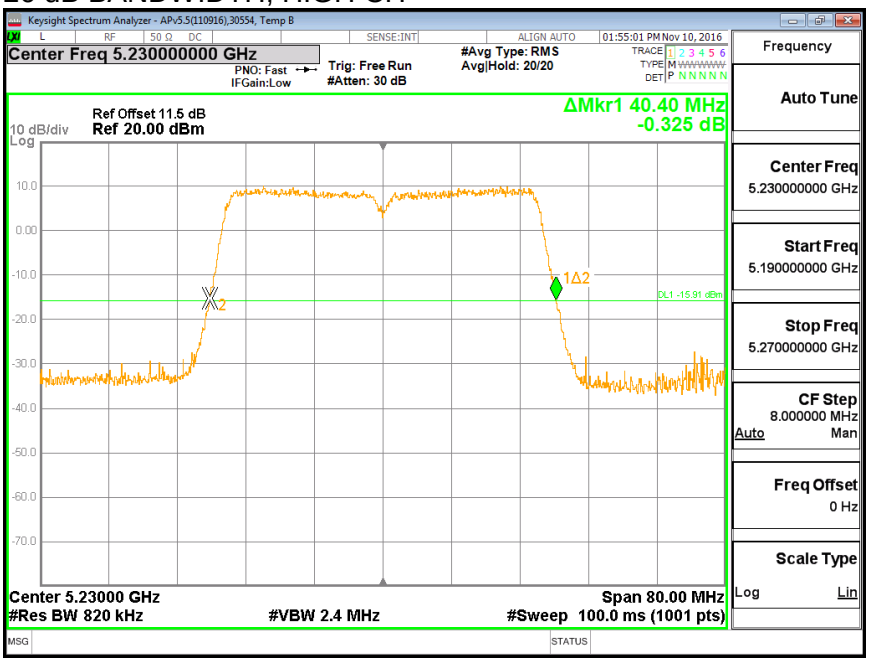

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.7.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% BW Antenna A (MHz)	99% BW Antenna B (MHz)
Low	5190	36.420	36.517
High	5230	36.390	36.441

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

99% BANDWIDTH, ANTENNA A

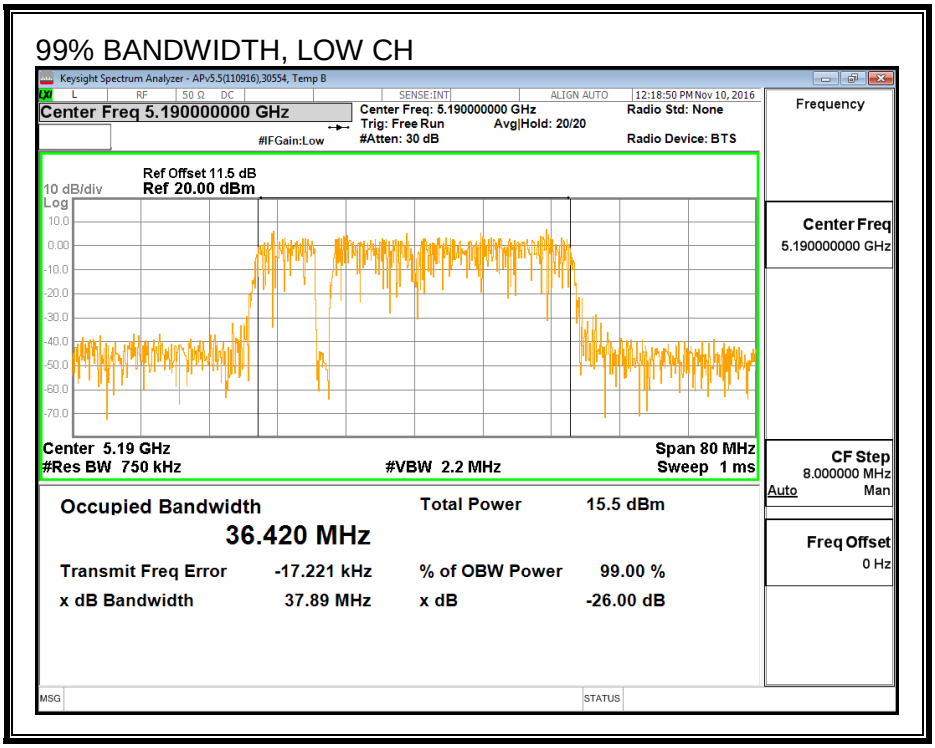

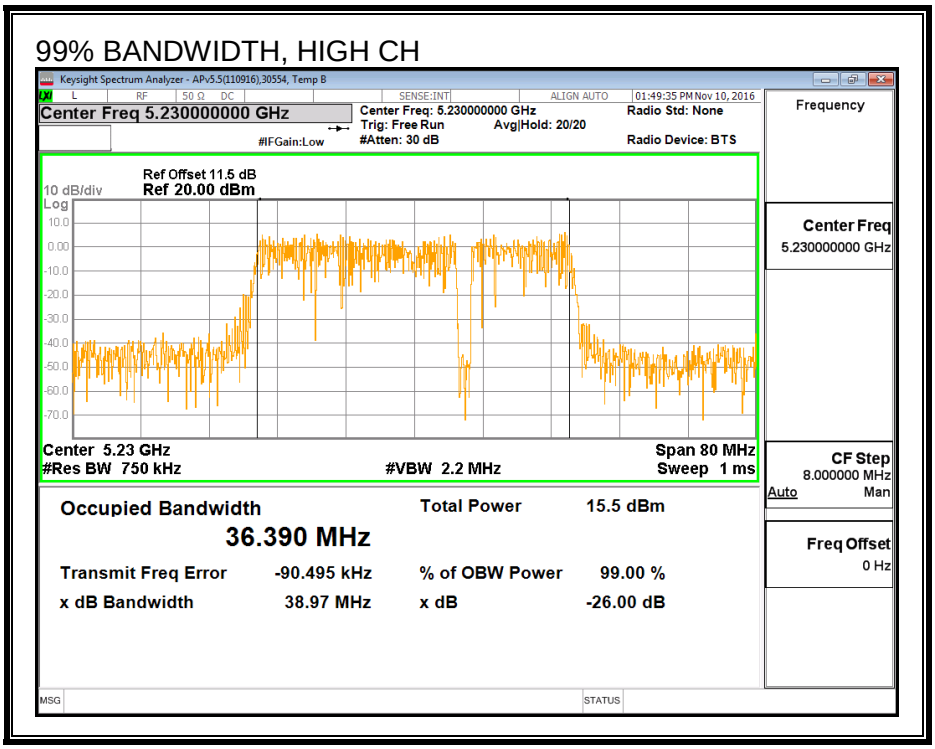

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

99% BANDWIDTH, ANTENNA B

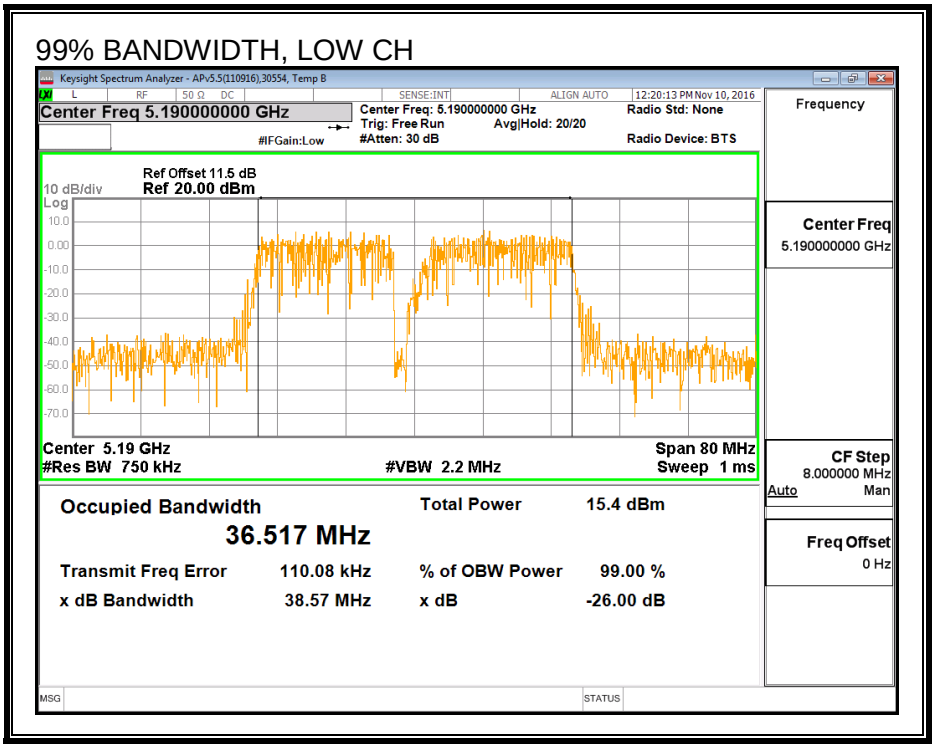

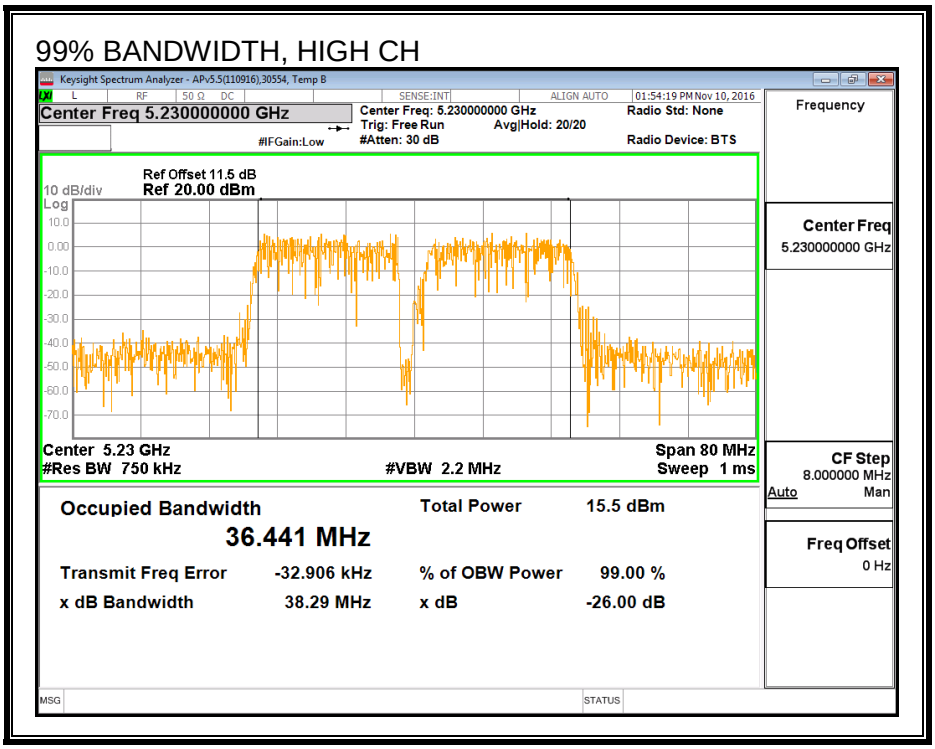

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701J
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.7.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	39472	Date:	12/14/16

Average Power Results

Channel	Frequency (MHz)	Antenna A Power (dBm)	Antenna B Power (dBm)	Total Power (dBm)
Low	5190	13.35	13.47	16.42
High	5230	16.41	16.50	19.47

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.7.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701J
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Antenna A Gain (dBi)	Antenna B Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
1.27	2.64	2.01

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

Antenna A Gain (dBi)	Antenna B Gain (dBi)	Correlated Chains Directional Gain (dBi)
1.27	2.64	4.99

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

RESULTS

ID:	39472	Date:	12/14/16

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5190	2.01	4.99	24.00	11.00
High	5230	2.01	4.99	24.00	11.00

Duty Cycle CF (dB)	0.10	Included in Calculations of Corr'd PSD

Output Power Results

Channel	Frequency (MHz)	Antenna A Meas Power (dBm)	Antenna B Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	13.35	13.47	16.42	24.00	-7.58
High	5230	16.41	16.50	19.47	24.00	-4.53

PSD Results

Channel	Frequency (MHz)	Antenna A Meas PSD (dBm)	Antenna B Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5190	2.92	2.98	6.06	11.00	-4.94
High	5230	3.17	2.98	6.19	11.00	-4.81

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701J
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

PSD, ANTENNA A

PSD, LOW CH

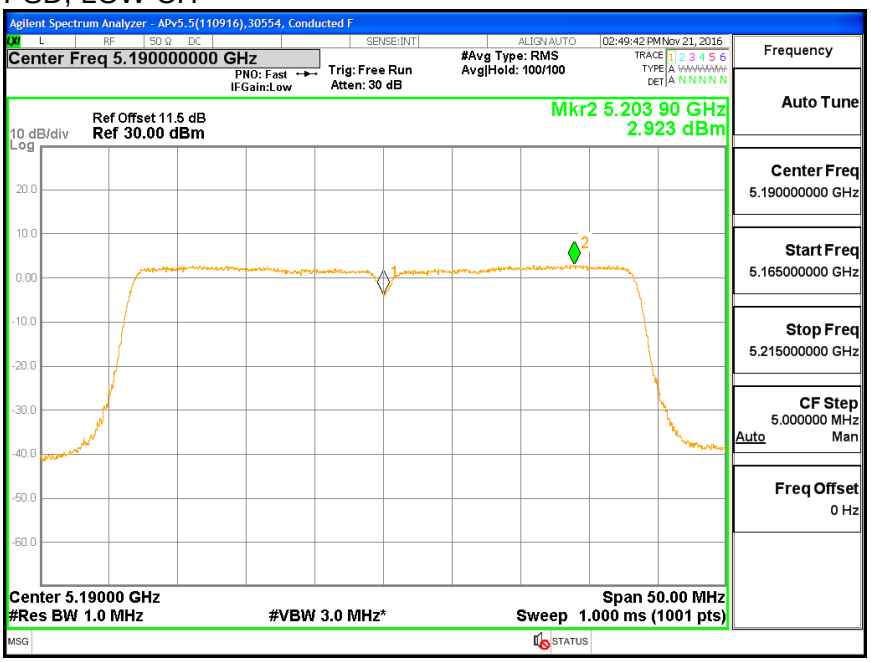

PSD, HIGH CH

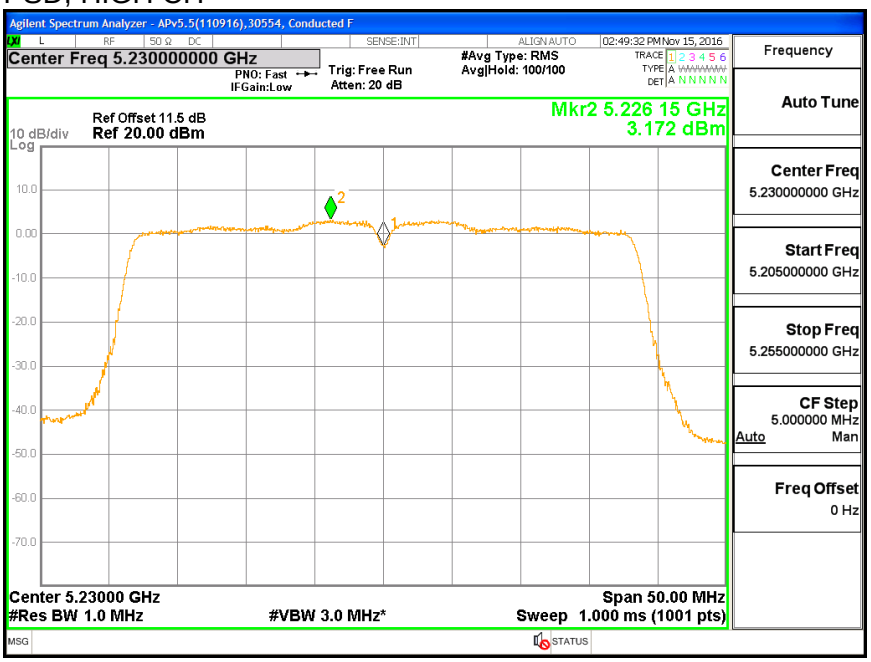

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

PSD, ANTENNA B

PSD, LOW CH

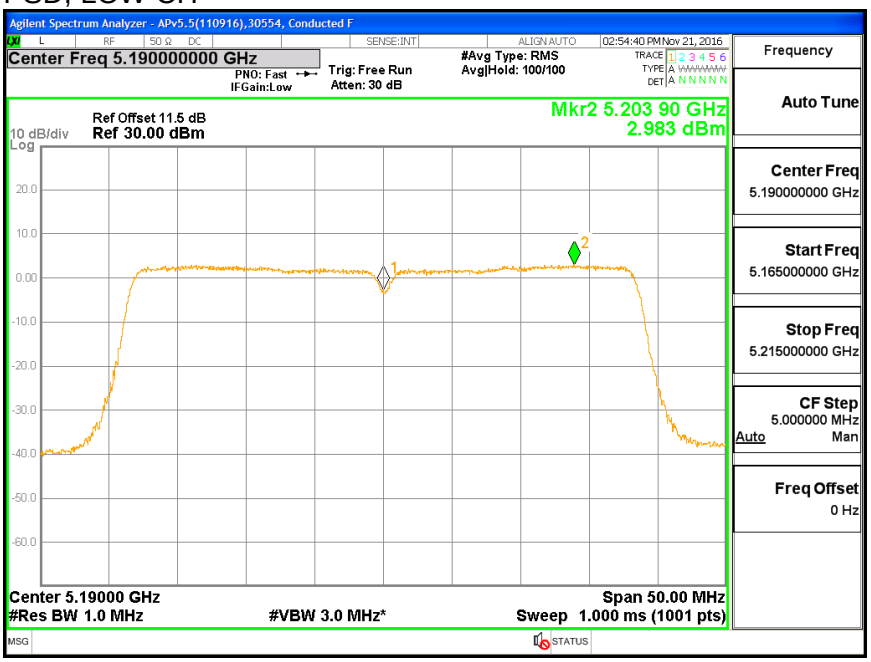

PSD, HIGH CH

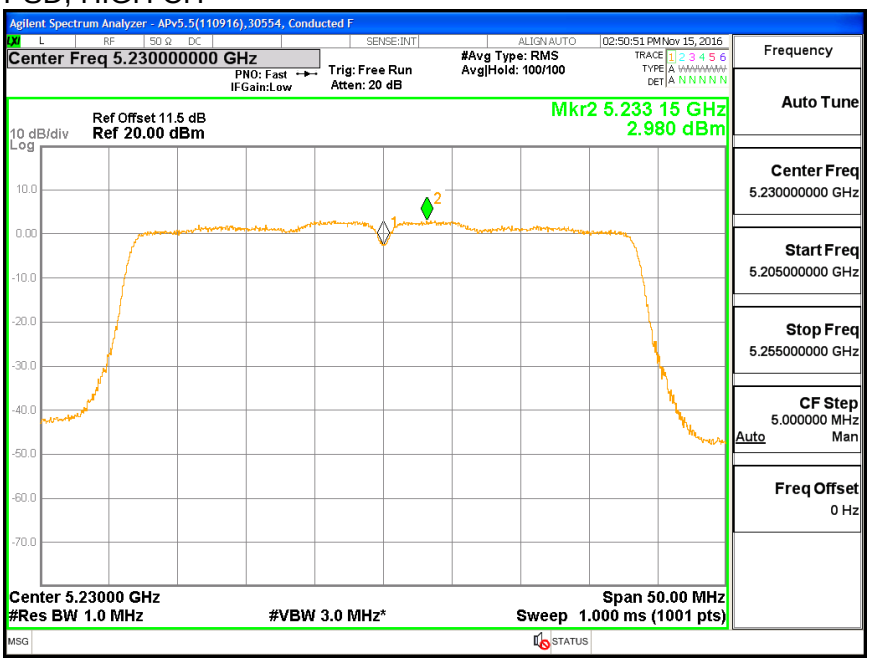

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.8. 802.11n HT40 2Tx (ANTENNA A + ANTENNA B) STBC MODE IN THE 5.2 GHz BAND

Noted: Covered by 802.11n HT40 2Tx (ANTENNA A + ANTENNA B) CDD MODE IN THE 5.2 GHz BAND

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.9. 802.11ac VHT80 ANTENNA A MODE IN THE 5.2 GHz BAND

8.9.1. 26 dB BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Mid	5210	82.400

26 dB BANDWIDTH

BANDWIDTH MID CH

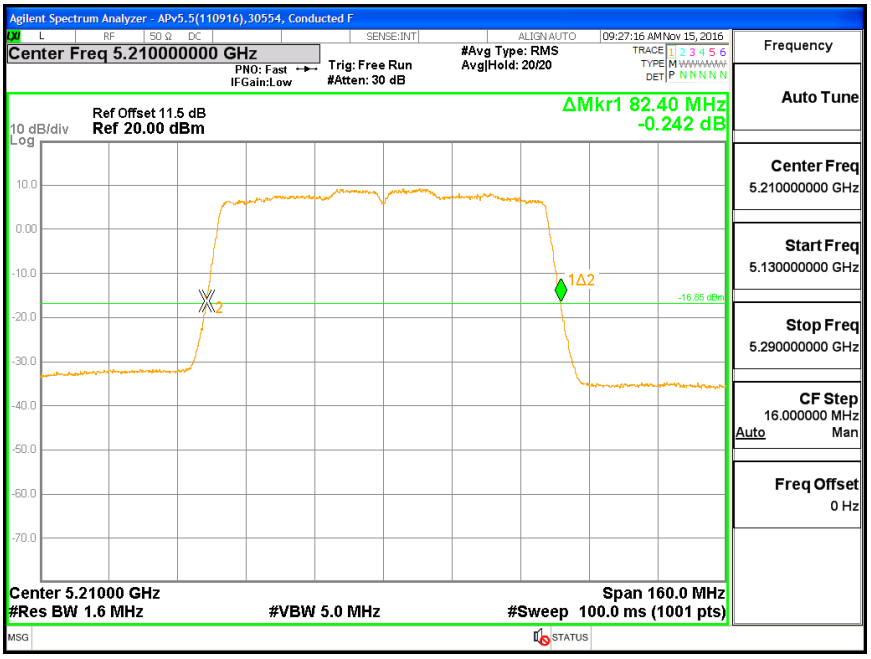

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.9.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Mid	5210	75.779

99% BANDWIDTH

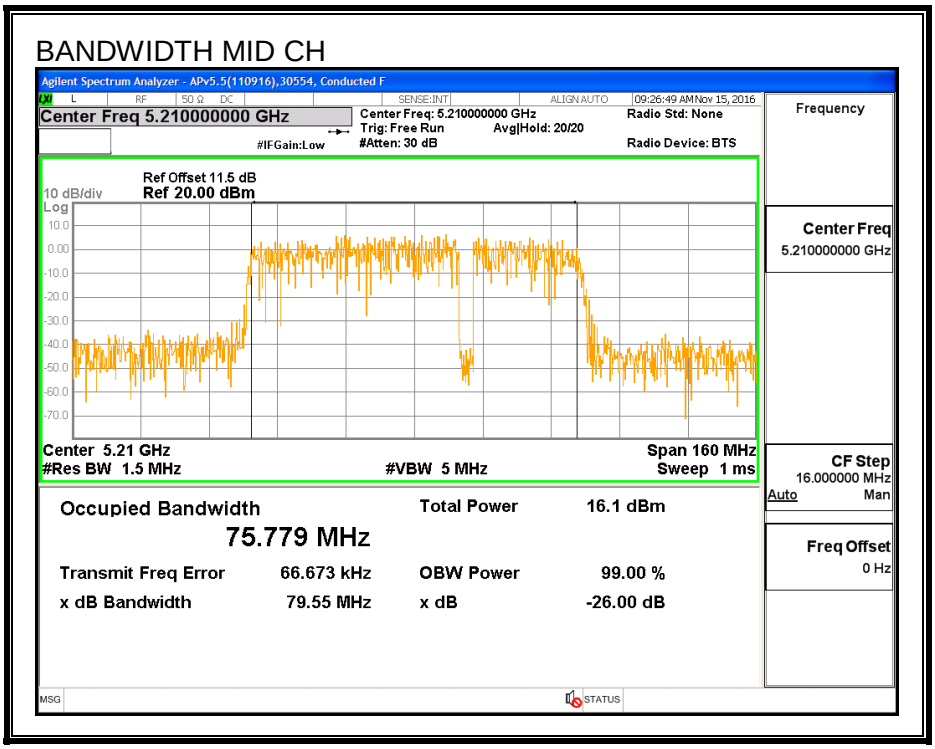

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.