CERTIFICATION TEST REPORT

Report Number. : 16U23814-E4V3

Applicant	:	APPLE, INC 1 INFINITE LOOP CUPERTINO, CA 95014, U.S.A.
Model	:	A1823
FCC ID	:	BCGA1823
EUT Description	:	TABLET DEVICE
Test Standard(s)	:	FCC 47 CFR PART 15 SUBPART E

Date Of Issue:
February 10, 2017

Prepared by:
UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888

NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
V1	01/26/2017	Initial Issue	Chin Pang
V2	02/06/2017	Removed IC data	Tina Chu
V3	02/10/2017	Address TCB's Questions	Chin Pang

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS 11

2. TEST METHODOLOGY 12

3. FACILITIES AND ACCREDITATION 12

4. CALIBRATION AND UNCERTAINTY 13

4.1. MEASURING INSTRUMENT CALIBRATION 13

4.2. SAMPLE CALCULATION 13

4.3. MEASUREMENT UNCERTAINTY 13

5. EQUIPMENT UNDER TEST 14

5.1. DESCRIPTION OF EUT 14

5.2. MAXIMUM OUTPUT POWER 14

5.3. DESCRIPTION OF AVAILABLE ANTENNAS 17

5.4. SOFTWARE AND FIRMWARE 17

5.5. WORST-CASE CONFIGURATION AND MODE 18

5.6. DESCRIPTION OF TEST SETUP 19

6. TEST AND MEASUREMENT EQUIPMENT 25

7. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS 26

7.1. ON TIME AND DUTY CYCLE 26

7.2. MEASUREMENT METHODS 30

8. ANTENNA PORT TEST RESULTS 31

8.1. 802.11n HT20 ANTENNA A MODE IN THE 5.2 GHz BAND 31

8.1.1. 26 dB BANDWIDTH 31

8.1.2. 99% BANDWIDTH 34

8.1.3. AVERAGE POWER 37

8.1.4. OUTPUT POWER AND PSD 38

8.2. 802.11n HT20 ANTENNA B MODE IN THE 5.2 GHz BAND 42

8.2.1. 26 dB BANDWIDTH 42

8.2.2. 99% BANDWIDTH 45

8.2.3. AVERAGE POWER 48

8.2.4. OUTPUT POWER AND PSD 49

8.3. 802.11n HT20 2Tx (ANTENNA A + ANTENNA B) CDD MODE IN THE 5.2 GHz BAND 53

8.3.1. 26 dB BANDWIDTH 53

8.3.2. 99% BANDWIDTH 57

8.3.3. AVERAGE POWER 61

8.3.4. OUTPUT POWER AND PSD 62

8.4. 802.11n HT20 2Tx (ANTENNA A + ANTENNA B) STBC MODE IN THE 5.2 GHz BAND 68

8.5. 802.11n HT40 ANTENNA A MODE IN THE 5.2 GHz BAND 69

8.5.1. 26 dB BANDWIDTH 69

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.5.2. 99% BANDWIDTH 71
8.5.3. AVERAGE POWER 73
8.5.4. OUTPUT POWER AND PSD 74

8.6. 802.11n HT40 ANTENNA B MODE IN THE 5.2 GHz BAND 77
8.6.1. 26 dB BANDWIDTH 77
8.6.2. 99% BANDWIDTH 79
8.6.3. AVERAGE POWER 81
8.6.4. OUTPUT POWER AND PSD 82

8.7. 802.11n HT40 2Tx (ANTENNA A + ANTENNA B) CDD MODE IN THE 5.2 GHz BAND 85
8.7.1. 26 dB BANDWIDTH 85
8.7.2. 99% BANDWIDTH 88
8.7.3. AVERAGE POWER 91
8.7.4. OUTPUT POWER AND PSD 92

8.8. 802.11n HT40 2Tx (ANTENNA A + ANTENNA B) STBC MODE IN THE 5.2 GHz BAND 97

8.9. 802.11ac VHT80 ANTENNA A MODE IN THE 5.2 GHz BAND 98
8.9.1. 26 dB BANDWIDTH 98
8.9.2. 99% BANDWIDTH 99
8.9.3. AVERAGE POWER 100
8.9.4. OUTPUT POWER AND PSD 101

8.10. 802.11ac VHT80 ANTENNA B MODE IN THE 5.2 GHz BAND 104
8.10.1. 26 dB BANDWIDTH 104
8.10.2. 99% BANDWIDTH 105
8.10.3. AVERAGE POWER 106
8.10.4. OUTPUT POWER AND PSD 107

8.11. 802.11ac VHT80 2Tx (ANTENNA A + ANTENNA B) CDD MODE IN THE 5.2 GHz BAND 110
8.11.1. 26 dB BANDWIDTH 110
8.11.2. 99% BANDWIDTH 112
8.11.3. AVERAGE POWER 114
8.11.4. OUTPUT POWER AND PSD 115

8.12. 802.11ac VHT80 2Tx (ANTENNA A + ANTENNA B) STBC MODE IN THE 5.2 GHz BAND 119

8.13. 802.11n HT20 ANTENNA A MODE IN THE 5.3 GHz BAND 120
8.13.1. 26 dB BANDWIDTH 120
8.13.2. 99% BANDWIDTH 123
8.13.3. AVERAGE POWER 126
8.13.4. OUTPUT POWER AND PSD 127

8.14. 802.11n HT20 ANTENNA B MODE IN THE 5.3 GHz BAND 131
8.14.1. 26 dB BANDWIDTH 131
8.14.2. 99% BANDWIDTH 134
8.14.3. AVERAGE POWER 137
8.14.4. OUTPUT POWER AND PSD 138

8.15. 802.11n HT20 2Tx (ANTENNA A + ANTENNA B) CDD MODE IN THE 5.3 GHz BAND . 142
8.15.1. 26 dB BANDWIDTH 142
8.15.2. 99% BANDWIDTH 146
8.15.3. AVERAGE POWER 150
8.15.4. OUTPUT POWER AND PSD 151

8.16. 802.11n HT20 2Tx (ANTENNA A + ANTENNA B) STBC MODE IN THE 5.3 GHz BAND 156

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.16.1. 26 dB BANDWIDTH 156
8.16.2. 99% BANDWIDTH 160
8.16.3. AVERAGE POWER 164
8.16.4. OUTPUT POWER AND PSD 165

8.17. 802.11n HT40 ANTENNA A MODE IN THE 5.3 GHz BAND 170
8.17.1. 26 dB BANDWIDTH 170
8.17.2. 99% BANDWIDTH 172
8.17.3. AVERAGE POWER 174
8.17.4. OUTPUT POWER AND PSD 175

8.18. 802.11n HT40 ANTENNA B MODE IN THE 5.3 GHz BAND 178
8.18.1. 26 dB BANDWIDTH 178
8.18.2. 99% BANDWIDTH 180
8.18.3. AVERAGE POWER 182
8.18.4. OUTPUT POWER AND PSD 183

8.19. 802.11n HT40 2Tx (ANTENNA A + ANTENNA B) CDD MODE IN THE 5.3 GHz BAND . 186
8.19.1. 26 dB BANDWIDTH 186
8.19.2. 99% BANDWIDTH 189
8.19.3. AVERAGE POWER 192
8.19.4. OUTPUT POWER AND PSD 193

8.20. 802.11n HT40 2Tx (ANTENNA A + ANTENNA B) STBC MODE IN THE 5.3 GHz BAND 197

8.21. 802.11ac VHT80 ANTENNA A MODE IN THE 5.3 GHz BAND 198
8.21.1. 26 dB BANDWIDTH 198
8.21.2. 99% BANDWIDTH 199
8.21.3. AVERAGE POWER 200
8.21.5. OUTPUT POWER AND PSD 201

8.22. 802.11ac VHT80 ANTENNA B MODE IN THE 5.3 GHz BAND 204
8.22.1. 26 dB BANDWIDTH 204
8.22.2. 99% BANDWIDTH 205
8.22.3. AVERAGE POWER 206
8.22.4. OUTPUT POWER AND PSD 207

8.23. 802.11ac VHT80 2Tx (ANTENNA A + ANTENNA B) CDD MODE IN THE 5.3 GHz BAND 210
8.23.1. 26 dB BANDWIDTH 210
8.23.2. 99% BANDWIDTH 212
8.23.3. AVERAGE POWER 214
8.23.4. OUTPUT POWER AND PSD 215

8.24. 802.11ac VHT80 2Tx (ANTENNA A + ANTENNA B) STBC MODE IN THE 5.3 GHz BAND 218

8.25. 802.11n HT20 ANTENNA A MODE IN THE 5.6 GHz BAND 219
8.25.1. 26 dB BANDWIDTH 219
8.25.2. 99% BANDWIDTH 222
8.25.3. AVERAGE POWER 225
8.25.4. OUTPUT POWER AND PSD 226

8.26. 802.11ac VHT20 ANTENNA A STRADDLE CHANNEL 144 RESULTS 230
8.26.1. OUTPUT POWER AND PSD 230
8.26.2. 6 dB BANDWIDTH 234

8.27. 802.11n HT20 ANTENNA B MODE IN THE 5.6 GHz BAND 235
8.27.1. 26 dB BANDWIDTH 235

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.27.2. 99% BANDWIDTH 238
8.27.3. AVERAGE POWER 241
8.27.4. OUTPUT POWER AND PSD 242

8.28. 802.11ac VHT20 ANTENNA B STRADDLE CHANNEL 144 RESULTS 246
8.28.1. OUTPUT POWER AND PSD 246
8.28.2. 6 dB BANDWIDTH 250

8.29. 802.11n HT20 2Tx (ANTENNA A + ANTENNA B) CDD MODE IN THE 5.6 GHz BAND . 251
8.29.1. 26 dB BANDWIDTH 251
8.29.2. 99% BANDWIDTH 256
8.29.3. AVERAGE POWER 261
8.29.4. OUTPUT POWER AND PSD 262

8.30. 802.11ac VHT20 2Tx (ANTENNA A + ANTENNA B) CDD STRADDLE CHANNEL 144 RESULTS 268
8.30.1. OUTPUT POWER AND PSD 268
8.30.2. 6 dB BANDWIDTH 274

8.31. 802.11n HT20 2Tx (ANTENNA A + ANTENNA B) STBC MODE IN THE 5.6 GHz BAND 276
8.31.1. 26 dB BANDWIDTH 276
8.31.2. 99% BANDWIDTH 281
8.31.3. AVERAGE POWER 286
8.31.4. OUTPUT POWER AND PSD 287

8.32. 802.11ac VHT20 2Tx (ANTENNA A + ANTENNA B) STBC STRADDLE CHANNEL 144 RESULTS 293
8.32.1. OUTPUT POWER AND PSD 293
8.32.2. 6 dB BANDWIDTH 299

8.33. 802.11n HT40 ANTENNA A MODE IN THE 5.6 GHz BAND 301
8.33.1. 26 dB BANDWIDTH 301
8.33.2. 99% BANDWIDTH 304
8.33.3. AVERAGE POWER 307
8.33.4. OUTPUT POWER AND PSD 308

8.34. 802.11ac VHT40 ANTENNA A STRADDLE CH 142 RESULTS 312
8.34.1. OUTPUT POWER AND PSD 312
8.34.2. 6 dB BANDWIDTH 316

8.35. 802.11n HT40 ANTENNA B MODE IN THE 5.6 GHz BAND 317
8.35.1. 26 dB BANDWIDTH 317
8.35.2. 99% BANDWIDTH 320
8.35.3. AVERAGE POWER 323
8.35.4. OUTPUT POWER AND PSD 324

8.36. 802.11ac VHT40 ANTENNA B STRADDLE CH 142 RESULTS 328
8.36.1. OUTPUT POWER AND PSD 328
8.36.2. 6 dB BANDWIDTH 332

8.37. 802.11n HT40 2Tx (ANTENNA A + ANTENNA B) CDD MODE IN THE 5.6 GHz BAND . 333
8.37.1. 26 dB BANDWIDTH 333
8.37.2. 99% BANDWIDTH 338
8.37.3. AVERAGE POWER 343
8.37.4. OUTPUT POWER AND PSD 344

8.38. 802.11ac VHT40 2Tx (ANTENNA A + ANTENNA B) CDD STRADDLE CHANNEL 142 RESULTS 350
8.38.1. OUTPUT POWER AND PSD 350

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.38.2. 6 dB BBANDWIDTH 356

8.39. 802.11n HT40 2Tx (ANTENNA A + ANTENNA B) STBC MODE IN THE 5.6 GHz BAND 358

8.40. 802.11ac VHT80 ANTENNA A MODE IN THE 5.6 GHz BAND 359
8.40.1. 26 dB BANDWIDTH 359
8.40.2. 99% BANDWIDTH 362
8.40.3. AVERAGE POWER 365
8.40.4. OUTPUT POWER AND PSD 366
8.40.5. STRADDLE CHANNEL 138 RESULTS 369
8.40.6. 6 dB BANDWIDTH 373

8.41. 802.11ac VHT80 ANTENNA B MODE IN THE 5.6 GHz BAND 374
8.41.1. 26 dB BANDWIDTH 374
8.41.2. 99% BANDWIDTH 377
8.41.3. AVERAGE POWER 380
8.41.4. OUTPUT POWER AND PSD 381
8.41.5. STRADDLE CHANNEL 138 RESULTS 384
8.41.6. 6 dB BANDWIDTH 388

8.42. 802.11ac VHT80 2Tx (ANTENNA A + ANTENNA B) CDD MODE IN THE 5.6 GHz BAND (5610MHz for FCC only) 389
8.42.1. 26 dB BANDWIDTH 389
8.42.2. 99% BANDWIDTH 393
8.42.3. AVERAGE POWER 397
8.42.4. OUTPUT POWER AND PSD 398
8.42.5. STRADDLE CHANNEL 138 RESULTS 403
8.42.6. 6 dB BANDWIDTH 409

8.43. 802.11ac VHT80 2Tx (ANTENNA A + ANTENNA B) STBC MODE IN THE 5.6 GHz BAND (5610MHz for FCC only) 411

8.44. 802.11n HT20 ANTENNA A MODE IN THE 5.8 GHz BAND 412
8.44.1. 6 dB BANDWIDTH 412
8.44.2. 26 dB BANDWIDTH 415
8.44.3. 99% BANDWIDTH 418
8.44.4. AVERAGE POWER 421
8.44.5. OUTPUT POWER 422
8.44.6. PSD 424

8.45. 802.11n HT20 ANTENNA B MODE IN THE 5.8 GHz BAND 427
8.45.1. 6 dB BANDWIDTH 427
8.45.2. 26 dB BANDWIDTH 430
8.45.3. 99% BANDWIDTH 433
8.45.4. AVERAGE POWER 436
8.45.5. OUTPUT POWER 437
8.45.6. PSD 439

8.46. 802.11n HT20 2Tx (ANTENNA A + ANTENNA B) CDD MODE IN THE 5.8 GHz BAND . 442
8.46.1. 6 dB BANDWIDTH 442
8.46.2. 26 dB BANDWIDTH 446
8.46.3. 99% BANDWIDTH 450
8.46.4. AVERAGE POWER 454
8.46.5. OUTPUT POWER 455
8.46.6. PSD 457

8.47. 802.11n HT20 2Tx (ANTENNA A + ANTENNA B) STBC MODE IN THE 5.8 GHz BAND 462

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.48. 802.11n HT40 ANTENNA A MODE IN THE 5.8 GHz BAND 463
8.48.1. 6 dB BANDWIDTH 463
8.48.2. 26 dB BANDWIDTH 465
8.48.3. 99% BANDWIDTH 467
8.48.4. AVERAGE POWER 469
8.48.5. OUTPUT POWER 470
8.48.6. PSD 472

8.49. 802.11n HT40 ANTENNA B MODE IN THE 5.8 GHz BAND 475
8.49.1. 6 dB BANDWIDTH 475
8.49.2. 26 dB BANDWIDTH 477
8.49.3. 99% BANDWIDTH 479
8.49.4. AVERAGE POWER 481
8.49.5. OUTPUT POWER 482
8.49.6. PSD 484

8.50. 802.11n HT40 2Tx (ANTENNA A + ANTENNA B) CDD MODE IN THE 5.8 GHz BAND . 487
8.50.1. 6 dB BANDWIDTH 487
8.50.2. 26 dB BANDWIDTH 490
8.50.3. 99% BANDWIDTH 493
8.50.4. AVERAGE POWER 496
8.50.5. OUTPUT POWER 497
8.50.6. PSD 499

8.51. 802.11n HT40 2Tx (ANTENNA A + ANTENNA B) STBC MODE IN THE 5.8 GHz BAND 503

8.52. 802.11ac VHT80 ANTENNA A MODE IN THE 5.8 GHz BAND 504
8.52.1. 6 dB BANDWIDTH 504
8.52.2. 26 dB BANDWIDTH 505
8.52.3. 99% BANDWIDTH 506
8.52.4. AVERAGE POWER 507
8.52.5. OUTPUT POWER 508
8.52.6. PSD 510

8.53. 802.11ac VHT80 ANTENNA B MODE IN THE 5.8 GHz BAND 512
8.53.1. 6 dB BANDWIDTH 512
8.53.2. 26 dB BANDWIDTH 513
8.53.3. 99% BANDWIDTH 514
8.53.4. AVERAGE POWER 515
8.53.5. OUTPUT POWER 516
8.53.6. PSD 518

8.54. 802.11ac VHT80 2Tx (ANTENNA A + ANTENNA B) CDD MODE IN THE 5.8 GHz BAND 520
8.54.1. 6 dB BANDWIDTH 520
8.54.2. 26 dB BANDWIDTH 522
8.54.3. 99% BANDWIDTH 524
8.54.4. AVERAGE POWER 526
8.54.5. OUTPUT POWER 527
8.54.6. PSD 529

8.55. 802.11ac VHT80 2Tx (ANTENNA A + ANTENNA B) STBC MODE IN THE 5.8 GHz BAND 532

9. RADIATED RESULTS 533

9.1. LIMITS AND PROCEDURE 533

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.2. TRANSMITTER ABOVE 1 GHz 534
9.2.1. 11n HT20 ANTENNA A SISO MODE IN THE 5.2GHz BAND 534
9.2.2. 11n HT20 ANTENNA B SISO MODE IN THE 5.2GHz BAND 542
9.2.3. 11n HT20 2TX CDD MIMO MODE IN THE 5.2GHz BAND 550
9.2.4. 11n HT40 ANTENNA A SISO MODE IN THE 5.2GHz BAND 558
9.2.5. 11n HT40 ANTENNA B SISO MODE IN THE 5.2GHz BAND 564
9.2.6. 11n HT40 2TX CDD MIMO MODE IN THE 5.2GHz BAND 570
9.2.7. 11ac HT80 ANTENNA A SISO MODE IN THE 5.2GHz BAND 576
9.2.8. 11ac HT80 ANTENNA B SISO MODE IN THE 5.2GHz BAND 580
9.2.9. 11ac HT80 2TX CDD MIMO MODE IN THE 5.2GHz BAND 584
9.2.10. 11n HT20 ANTENNA A SISO MODE IN THE 5.3GHz BAND 588
9.2.11. 11n HT20 ANTENNA B SISO MODE IN THE 5.3GHz BAND 596
9.2.12. 11n HT20 2TX CDD MIMO MODE IN THE 5.3GHz BAND 604
9.2.13. 11n HT40 ANTENNA A SISO MODE IN THE 5.3GHz BAND 612
9.2.14. 11n HT40 ANTENNA B SISO MODE IN THE 5.3GHz BAND 618
9.2.15. 11n HT40 2TX CDD MIMO MODE IN THE 5.3GHz BAND 624
9.2.16. 11ac HT80 ANTENNA A SISO MODE IN THE 5.3GHz BAND 630
9.2.17. 11ac HT80 ANTENNA B SISO MODE IN THE 5.3GHz BAND 634
9.2.18. 11ac HT80 2TX CDD MIMO MODE IN THE 5.3GHz BAND 638
9.2.19. 11n HT20 ANTENNA A SISO MODE IN THE 5.6GHz BAND 642
9.2.20. 11ac HT20 ANTENNA A SISO STRADDLE CHANNEL 144 652
9.2.21. 11n HT20 ANTENNA B SISO MODE IN THE 5.6GHz BAND 654
9.2.22. 11ac HT20 ANTENNA B SISO STRADDLE CHANNEL 144 664
9.2.23. 11n HT20 2TX CDD MIMO MODE IN THE 5.6GHz BAND 666
9.2.24. 11ac HT20 2TX CDD MIMO STRADDLE CHANNEL 144 676
9.2.25. 11n HT40 ANTENNA A SISO MODE IN THE 5.6GHz BAND 678
9.2.26. 11ac HT40 ANTENNA A SISO STRADDLE CHANNEL 142 688
9.2.27. 11n HT40 ANTENNA B SISO MODE IN THE 5.6GHz BAND 690
9.2.28. 11ac HT40 ANTENNA B SISO STRADDLE CHANNEL 142 700
9.2.29. 11n HT40 2TX CDD MIMO MODE IN THE 5.6GHz BAND 702
9.2.30. 11ac HT40 2TX CDD MIMO STRADDLE CHANNEL 142 712
9.2.31. 11ac HT80 ANTENNA A SISO MODE IN THE 5.6GHz BAND 714
9.2.32. 11ac HT80 ANTENNA A SISO STRADDLE CHANNEL 138 720
9.2.33. 11ac HT80 ANTENNA B SISO MODE IN THE 5.6GHz BAND 722
9.2.34. 11ac HT80 ANTENNA B SISO STRADDLE CHANNEL 138 728
9.2.35. 11ac HT80 2TX CDD MIMO MODE IN THE 5.6GHz BAND 730
9.2.36. 11ac HT80 2TX CDD MIMO STRADDLE CHANNEL 138 736
9.2.37. 11n HT20 ANTENNA A SISO MODE IN THE 5.8GHz BAND 738
9.2.38. 11n HT20 ANTENNA B SISO MODE IN THE 5.8GHz BAND 748
9.2.39. 11n HT20 2TX CDD MIMO MODE IN THE 5.8GHz BAND 758
9.2.40. 11n HT40 ANTENNA A SISO MODE IN THE 5.8GHz BAND 768
9.2.41. 11n HT40 ANTENNA B SISO MODE IN THE 5.8GHz BAND 776
9.2.42. 11n HT40 2TX CDD MIMO MODE IN THE 5.8GHz BAND 784
9.2.43. 11ac HT80 ANTENNA A SISO MODE IN THE 5.8GHz BAND 792
9.2.44. 11ac HT80 ANTENNA B SISO MODE IN THE 5.8GHz BAND 798
9.2.45. 11ac HT80 2TX CDD MIMO MODE IN THE 5.8GHz BAND 804
9.3. RADIATION CO-LOCATION 810
9.4. WORST-CASE BELOW 1 GHz 814
9.5. WORST-CASE 18 to 26 GHz 816
9.6. WORST-CASE 26 to 40 GHz 818

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

10. AC POWER LINE CONDUCTED EMISSIONS 820

10.1. EUT POWERED BY AC/DC ADAPTER VIA USB CABLE 821

10.2. EUT POWERED BY HOST PC VIA USB CABLE 823

11. DYNAMIC FREQUENCY SELECTION 825

11.1. OVERVIEW 825
11.1.1. LIMITS 825
11.1.2. TEST AND MEASUREMENT SYSTEM 829
11.1.3. TEST AND MEASUREMENT SOFTWARE 831
11.1.4. SETUP OF EUT (CLIENT MODE) 832
11.1.5. SETUP OF EUT (CLIENT-TO-CLIENT COMMUNICATIONS MODE) 833
11.1.6. DESCRIPTION OF EUT 834

11.2. CLIENT MODE RESULTS FOR 20 MHz BANDWIDTH 836
11.2.1. TEST CHANNEL 836
11.2.2. RADAR WAVEFORM AND TRAFFIC 836
11.2.3. OVERLAPPING CHANNEL TESTS 839
11.2.4. MOVE AND CLOSING TIME 839

11.3. CLIENT MODE RESULTS FOR 40 MHz BANDWIDTH 843
11.3.1. TEST CHANNEL 843
11.3.2. RADAR WAVEFORM AND TRAFFIC 843
11.3.3. OVERLAPPING CHANNEL TESTS 846
11.3.4. MOVE AND CLOSING TIME 846

11.4. CLIENT MODE RESULTS FOR 80 MHz BANDWIDTH 850
11.4.1. TEST CHANNEL 850
11.4.2. RADAR WAVEFORM AND TRAFFIC 850
11.4.3. OVERLAPPING CHANNEL TESTS 853
11.4.4. MOVE AND CLOSING TIME 853
11.4.5. 10-MINUTE CLIENT Tx MONITORING PERIOD 857

11.5. CLIENT-TO-CLIENT COMMUNICATIONS MODE RESULTS FOR 20 MHz BANDWIDTH 858
11.5.1. TEST CHANNEL 858
11.5.2. RADAR WAVEFORM AND TRAFFIC 858
11.5.3. OVERLAPPING CHANNEL TESTS 861
11.5.4. MOVE AND CLOSING TIME 861

11.6. CLIENT-TO-CLIENT COMMUNICATIONS MODE RESULTS FOR 40 MHz BANDWIDTH 864
11.6.1. TEST CHANNEL 864
11.6.2. RADAR WAVEFORM AND TRAFFIC 864
11.6.3. OVERLAPPING CHANNEL TESTS 866
11.6.4. MOVE AND CLOSING TIME 866

11.7. CLIENT-TO-CLIENT COMMUNICATIONS MODE RESULTS FOR 80 MHz BANDWIDTH 869
11.7.1. TEST CHANNEL 869
11.7.2. RADAR WAVEFORM AND TRAFFIC 869
11.7.3. OVERLAPPING CHANNEL TESTS 871
11.7.4. MOVE AND CLOSING TIME 871

12. SETUP PHOTOS 874

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: APPLE, INC.
1 INFINITE LOOP
CUPERTINO, CA 95014, U.S.A.

EUT DESCRIPTION: TABLET DEVICE

MODEL: A1823

SERIAL NUMBER: F9FSQ00QHNC9 (CONDUCTED),
F9FSQ00MHNC9 (RADIATED)
F9FSQ005HNC9 (DFS)

DATE TESTED: SEPTEMBER 18, 2016 –JANUARY 25, 2017

APPLICABLE STANDARDS	
STANDARD	**TEST RESULTS**
CFR 47 Part 15 Subpart E	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:

CHIN PANG
SENIOR ENGINEER
UL VERIFICATION SERVICES INC.

Prepared By:

JOE VANG
EMC WISE ENGINEER
UL VERIFICATION SERVICES INC.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

2. TEST METHODOLOGY

FCC: The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, FCC 14-30, FCC KDB 662911 D01 v02r01, FCC KDB 905462 D02 v02/D03 v01r02/D06 v02/ D07 v01r01, FCC KDB 789033 D02 v01r03, FCC KDB 644545 D03 v01, ANSI C63.10-2013.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
☐ Chamber A (IC:2324B-1)	☒ Chamber D (IC:2324B-4)
☐ Chamber B (IC:2324B-2)	☒ Chamber E (IC:2324B-5)
☐ Chamber C (IC:2324B-3)	☒ Chamber F (IC:2324B-6)
	☐ Chamber G (IC:2324B-7)
	☐ Chamber H (IC:2324B-8)

The above test sites and facilities are covered under FCC Test Firm Registration # 208313.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at http://ts.nist.gov/standards/scopes/2000650.htm.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

Field Strength (dBuV/m) = Measured Voltage (dBuV) + Antenna Factor (dB/m) + Cable Loss (dB) – Preamp Gain (dB)

36.5 dBuV + 18.7 dB/m + 0.6 dB – 26.9 dB = 28.9 dBuV/m

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 9KHz to 0.15 MHz	3.84 dB
Conducted Disturbance, 0.15 to 30 MHz	3.65 dB
Radiated Disturbance, 9KHz to 30 MHz	3.15 dB
Radiated Disturbance, 30 to 1000 MHz	5.36 dB
Radiated Disturbance,1000 to 18000 MHz	4.32 dB
Radiated Disturbance,18000 to 26000 MHz	4.45 dB
Radiated Disturbance,26000 to 40000 MHz	5.24 dB

Uncertainty figures are valid to a confidence level of 95%.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a tablet with multimedia functions (music, application support, and video), Cellular GSM/GPRS/EGPRS/CDMA2000 1xRTT/1x Advanced/EVDO Rev.A /WCDMA /HSPA+/DC- HSDPA/LTE FDD & TDD/TD-SCDMA radio, IEEE 802.11a/b/g/n/ac radio, and Bluetooth radio. The rechargeable battery is not user accessible.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum average conducted output power as follows:
NOTE: Covered modes are test reduction modes. The output powers on the “covered modes are equal to or less than the mode referenced and use the same modulation.

5.2GHz Band FCC

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5180 - 5240	802.11a	Covered by 802.11n HT20 SISO	
	802.11n HT20 SISO	16.46	44.26
	802.11a 2TX CDD	Covered by 802.11n HT20 2TX CDD	
	802.11n HT20 2TX CDD	19.48	88.72
	802.11n HT20 2TX STBC	Covered by 802.11n HT20 2TX CDD	
	802.11ac VHT20 2TX STBC	Covered by 802.11n HT20 2TX CDD	
	802.11n HT20 2TX SDM	Covered by 802.11n HT20 2TX CDD	
	802.11ac VHT20 2TX SDM	Covered by 802.11n HT20 2TX CDD	
5190 - 5230	802.11n HT40 SISO	16.42	43.85
	802.11n HT40 2TX CDD	19.40	87.10
	802.11n HT40 2TX STBC	Covered by 802.11n HT40 2TX CDD	
	802.11ac VHT40 2TX STBC	Covered by 802.11n HT40 2TX CDD	
	802.11n HT40 2TX SDM	Covered by 802.11n HT40 2TX CDD	
	802.11ac VHT40 2TX SDM	Covered by 802.11n HT40 2TX CDD	
5210	802.11ac VHT80 SISO	13.96	24.89
	802.11ac VHT80 2TX CDD	15.95	39.36
	802.11ac VHT80 2TX STBC	Covered by 802.11ac VHT80 2TX CDD	
	802.11ac VHT80 2TX SDM	Covered by 802.11ac VHT80 2TX CDD	

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

5.3GHz Band

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5260 - 5320	802.11a	Covered by 802.11n HT20 SISO	
	802.11n HT20 SISO	16.97	49.77
	802.11a 2TX CDD	Covered by 802.11n HT20 2TX CDD	
	802.11n HT20 2TX CDD	19.48	88.72
	802.11n HT20 2TX STBC	19.95	98.86
	802.11n HT20 2TX SDM	Covered by 802.11n HT20 2TX STBC	
	802.11ac VHT20 2TX SDM	Covered by 802.11n HT20 2TX STBC	
5270 - 5310	802.11n HT40 SISO	16.91	49.09
	802.11n HT40 2TX CDD	20.01	100.23
	802.11n HT40 2TX STBC	Covered by 802.11n HT40 2TX CDD	
	802.11ac VHT40 2TX STBC	Covered by 802.11n HT40 2TX CDD	
	802.11n HT40 2TX SDM	Covered by 802.11n HT40 2TX CDD	
	802.11ac VHT40 2TX SDM	Covered by 802.11n HT40 2TX CDD	
5290	802.11ac VHT80 SISO	12.88	19.41
	802.11ac VHT80 2TX CDD	14.97	31.41
	802.11ac VHT80 2TX STBC	Covered by 802.11ac VHT80 2TX CDD	
	802.11ac VHT80 2TX SDM	Covered by 802.11ac VHT80 2TX CDD	

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

5.6GHz Band FCC

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5500 - 5700	802.11a	Covered by 802.11n HT20 SISO	
5500 - 5700	802.11n HT20 SISO	16.98	49.89
5720	802.11ac VHT20 SISO (based on UNII-2C band output power)	16.11	40.83
	802.11a 2TX CDD	Covered by 802.11n HT20 2TX CDD	
5500 - 5700	802.11n HT20 2TX CDD	18.44	69.82
5720	802.11ac VHT20 2TX CDD (based on UNII-2C band output power)	17.01	50.23
5500 - 5700	802.11n HT20 2TX STBC	19.67	92.68
5720	802.11ac VHT20 2TX STBC (based on UNII-2C band output power)	18.72	74.47
5500 - 5700	802.11n HT20 2TX SDM	Covered by 802.11n HT20 2TX STBC	
5501 - 5700	802.11ac VHT20 2TX SDM	Covered by 802.11n HT20 2TX STBC	
5720	802.11ac VHT20 2TX SDM (based on UNII-2C band output power)	Covered by 802.11n HT20 2TX STBC	
5510 - 5670	802.11n HT40 SISO	16.98	49.89
5710	802.11ac VHT40 SISO (based on UNII-2C band output power)	16.69	46.67
5510 - 5670	802.11n HT40 2TX CDD	19.75	94.41
5710	802.11ac VHT40 2TX CDD (based on UNII-2C band output power)	19.38	86.70
5510 - 5670	802.11n HT40 2TX STBC	Covered by 802.11n HT40 2TX CDD	
5511 - 5670	802.11acV HT40 2TX STBC	Covered by 802.11n HT40 2TX CDD	
5710	802.11ac VHT40 2TX STBC (based on UNII-2C band output power)	Covered by 802.11n HT40 2TX CDD	
5510 - 5670	802.11n HT40 2TX SDM	Covered by 802.11n HT40 2TX CDD	
5510 - 5670	802.11ac VHT40 2TX SDM	Covered by 802.11n HT40 2TX CDD	
5710	802.11ac VHT40 2TX SDM (based on UNII-2C band output power)	Covered by 802.11n HT40 2TX CDD	
5530-5610	802.11ac VHT80 SISO	16.90	48.98
5690	802.11ac VHT80 SISO (based on UNII-2C band output power)	16.82	48.08
5530-5610	802.11ac VHT80 2TX CDD	19.65	92.26
5690	802.11ac VHT80 2TX CDD (based on UNII-2C band output power)	19.55	90.16
5530-5610	802.11ac VHT80 2TX STBC	Covered by 802.11ac VHT80 2TX CDD	
5690	802.11ac VHT80 2TX STBC(based on UNII-2C band output power)	Covered by 802.11ac VHT80 2TX CDD	
5530-5610	802.11ac VHT80 2TX SDM	Covered by 802.11ac VHT80 2TX CDD	
5690	802.11ac VHT80 2TX SDM (based on UNII-2C band output power)	Covered by 802.11ac VHT80 2TX CDD	

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

5.8GHz Band FCC

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5745 - 5825	802.11a	Covered by 802.11n HT20 SISO	
	802.11n HT20 SISO	16.45	44.16
	802.11a 2TX CDD	Covered by 802.11n HT20 2TX CDD	
	802.11n HT20 2TX CDD	19.50	89.13
	802.11n HT20 2TX STBC	Covered by 802.11n HT20 2TX CDD	
	802.11ac VHT20 2TX STBC	Covered by 802.11n HT20 2TX CDD	
	802.11n HT20 2TX SDM	Covered by 802.11n HT20 2TX CDD	
	802.11ac VHT20 2TX SDM	Covered by 802.11n HT20 2TX CDD	
5755 - 5795	802.11n HT40 SISO	16.41	43.75
	802.11n HT40 2TX CDD	19.47	88.51
	802.11n HT40 2TX STBC	Covered by 802.11n HT40 2TX CDD	
	802.11ac VHT40 2TX STBC	Covered by 802.11n HT40 2TX CDD	
	802.11n HT40 2TX SDM	Covered by 802.11n HT40 2TX CDD	
	802.11ac VHT40 2TX SDM	Covered by 802.11n HT40 2TX CDD	
5775	802.11ac VHT80 SISO	16.44	44.06
	802.11ac VHT80 2TX CDD	17.96	62.52
	802.11ac VHT80 2TX STBC	Covered by 802.11ac VHT80 2TX CDD	
	802.11ac VHT80 2TX SDM	Covered by 802.11ac VHT80 2TX CDD	

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

Frequency Band (GHz)	Antenna Gain (dBi)	
	Antenna A	Antenna B
5.2	1.27	2.64
5.3	2.24	2.77
5.5	3.39	3.17
5.8	3.54	3.21

5.4. SOFTWARE AND FIRMWARE

The firmware installed in the EUT during testing was 14E232.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

5.5. WORST-CASE CONFIGURATION AND MODE

For radiated harmonics spurious below 1GHz, 18-40GHz and power line conducted emissions were performed with the EUT set at the CDD mode at highest power setting among the CDD/STBC/SDM modes as worst-case scenario.

For SISO modes, there are two transmission antennas. The antenna used in any given time can be either ANTENNA A, or ANTENNA B. All antenna ports have the same power; output power and PSD measurement for SISO modes on both antennas are reported. For 2TX MIMO modes, ANTENNA A/ANTENNA B, used at the same time.

The fundamental of the EUT was investigated in three orthogonal orientations X (Flatbed), Y (Landscape), Z (Portrait), it was determined that (see table below) was worst-case orientations. Therefore, all final radiated testing was performed with the EUT in (see table below) orientation.

Frequency Band (GHz)	Mode	Antenna Port	Worst-case Orientation
5.2-5.8	1TX SISO	Antenna A	Y (Landscape)
		Antenna B	Y (Landscape)
	2TX MIMO	Antenna A + Antenna B	Y (Landscape)

Worst-case data rates as provided by the client were:

802.11a mode: 6 Mbps
802.11n HT20 mode: MCS0
802.11n HT40 mode: MCS0
802.11ac VHT20 mode: MCS0
802.11ac VHT40 mode: MCS0
802.11ac VHT80 mode: MCS0

802.11ac VHT20 and VHT40 mode are different from 802.11nHT20 and HT40 only in control messages and have the same power settings.

802.11 ac VHT20 and VHT40 are covered by 802.11n-HT20 and HT40 measurement data

There are two vendors of the WiFi/Bluetooth radio modules: variant 1 and variant 2. The Wi-Fi/Bluetooth radio modules have the same mechanical outline (e.g., the same package dimension and pin-out layout), use the same on-board antenna matching circuit, have an identical antenna structure, and are built and tested to conform to the same specifications and to operate within the same tolerances.

Baseline testing was performed on the two variants to determine the worst case on all conducted power and radiated emissions.

For simultaneous transmission of multiple channels from the same antenna in BT/BLE and WLAN 5 GHz bands. Baseline testing was performed on various configurations to determine the worst case on radiated emissions.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop	Apple	A1286	7313700NAGW	N/A
Laptop AC/DC adapter	Apple	A1343	C062172045DDJ94A6	N/A
Earphone	Apple	NA	NA	N/A
EUT AC/DC adapter	Apple	A1357	W010A051	N/A

I/O CABLES (CONDUCTED TEST)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	Antenna	1	SMA	Un-Shielded	0.2	To spectrum Analyzer
2	USB	1	USB	Shielded	1	N/A
3	AC	1	AC	Un-shielded	2	N/A

I/O CABLES (RADIATED ABOVE 1 GHZ)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
None Used						

I/O CABLES (RADIATED BELOW 1 GHZ AND AC LINE CONDUCTED: AC/DC ADAPTER CONFIGURATION)

I/O Cable List						
Cable No	Port	# of identical	Connector Type	Cable Type	Cable Length (m)	Remarks
1	Earphone Jack	1	3.5mm Audio	Shielded	0.9	N/A
2	USB	1	USB	shielded	1	N/A

I/O CABLES (AC LINE CONDUCTED: LAPTOP CONFIGUARTION)

I/O Cable List						
Cable No	Port	# of identical	Connector Type	Cable Type	Cable Length (m)	Remarks
1	Earphone Jack	1	3.5mm Audio	Shielded	0.9	N/A
2	USB	1	USB	Shielded	1	N/A
3	AC	1	AC	Un-shielded	2	N/A

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701J
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

TEST SETUP - CONDUCTED TESTS

The EUT was connected to a host Laptop via USB cable adapter and spectrum analyzer to antenna port. Test software exercised the EUT.

SETUP DIAGRAM

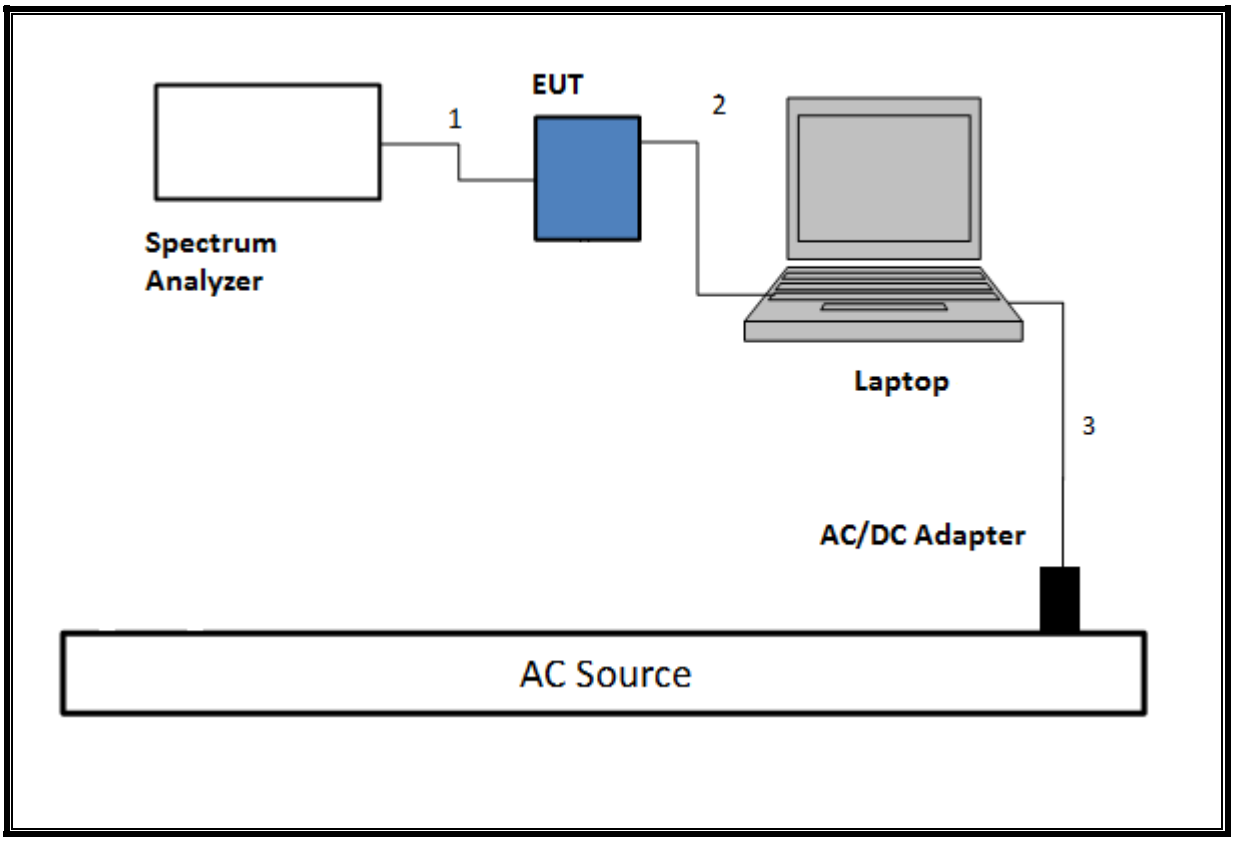

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

TEST SETUP- RADIATED-ABOVE 1 GHZ

The EUT was powered by battery. Test software exercised the EUT.

SETUP DIAGRAM

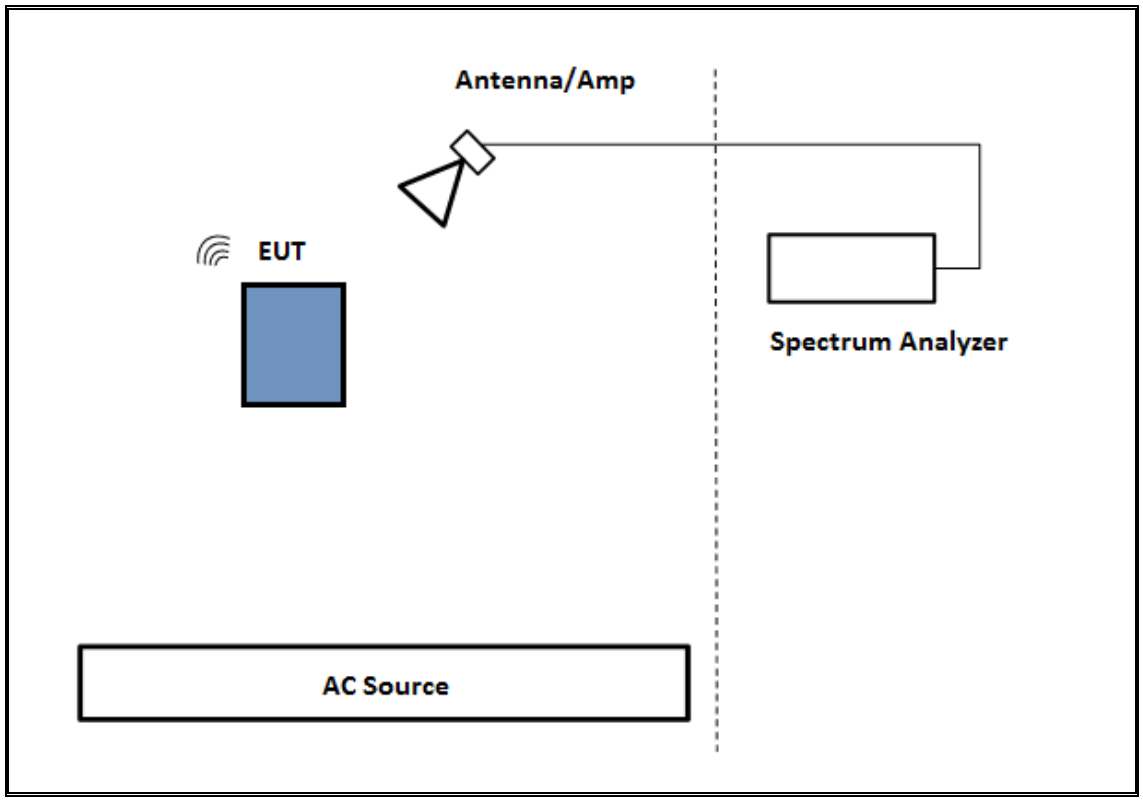

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

TEST SETUP- BELOW 1GHz

The EUT was powered by AC/DC adapter and connected with earphone. Test software exercised the EUT.

SETUP DIAGRAM

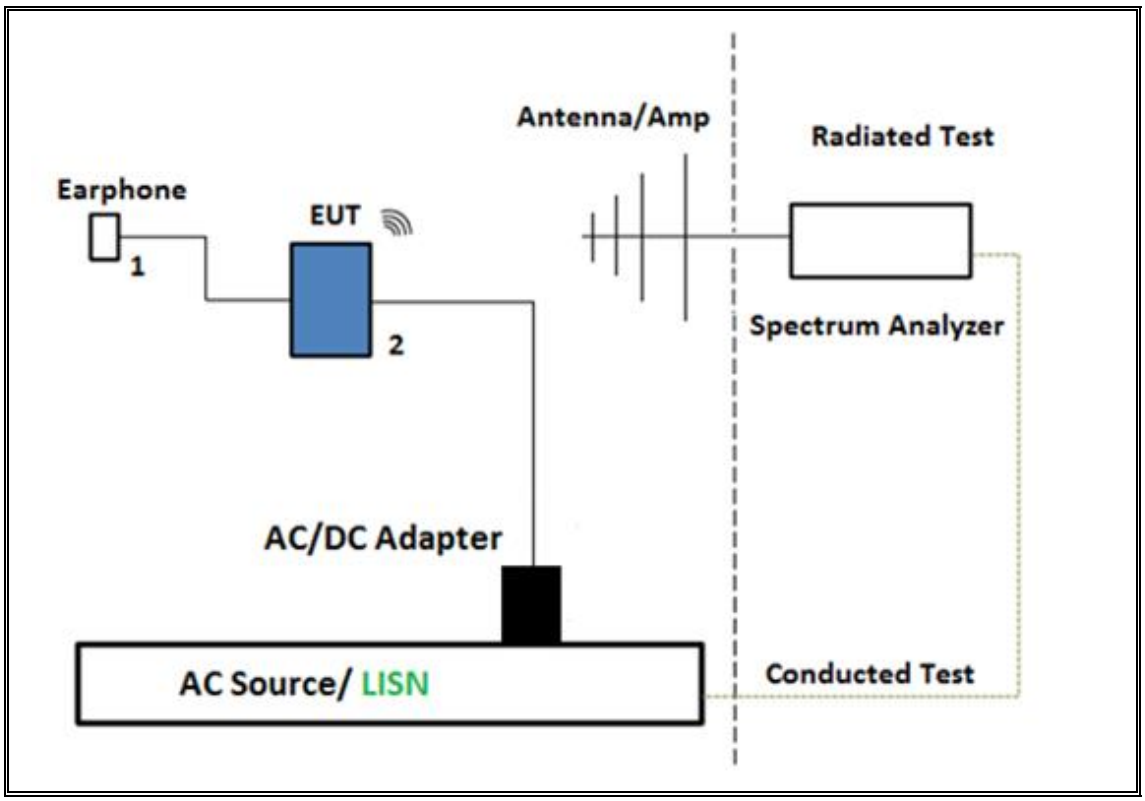

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

TEST SETUP- AC LINE CONDUCTED: AC/DC ADAPTER CONFIGURATION

The EUT was tested with earphone connected and powered by AC/DC adapter via USB cable. Test software exercised the EUT.

SETUP DIAGRAM

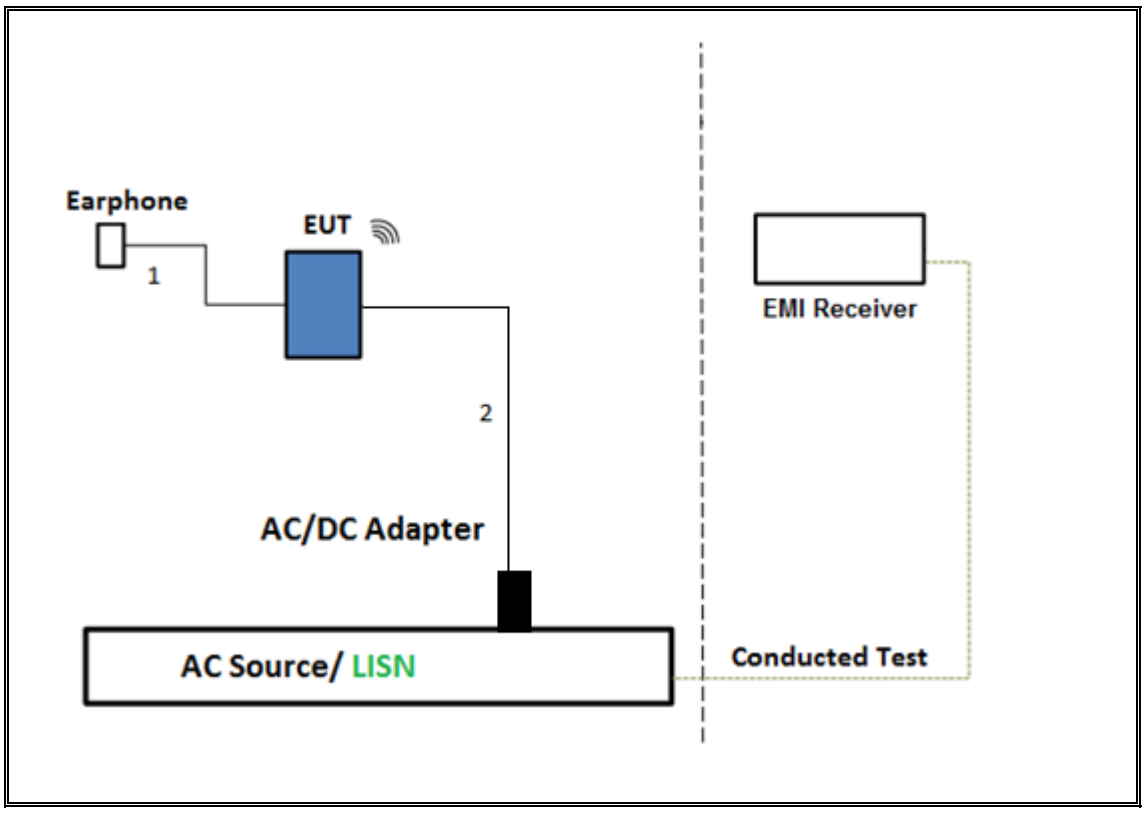

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

TEST SETUP- AC LINE CONDUCTED: LAPTOP CONFIGURATION

The EUT was tested with earphone connected and powered by host PC via USB cable. Test software exercised the EUT.

SETUP DIAGRAM

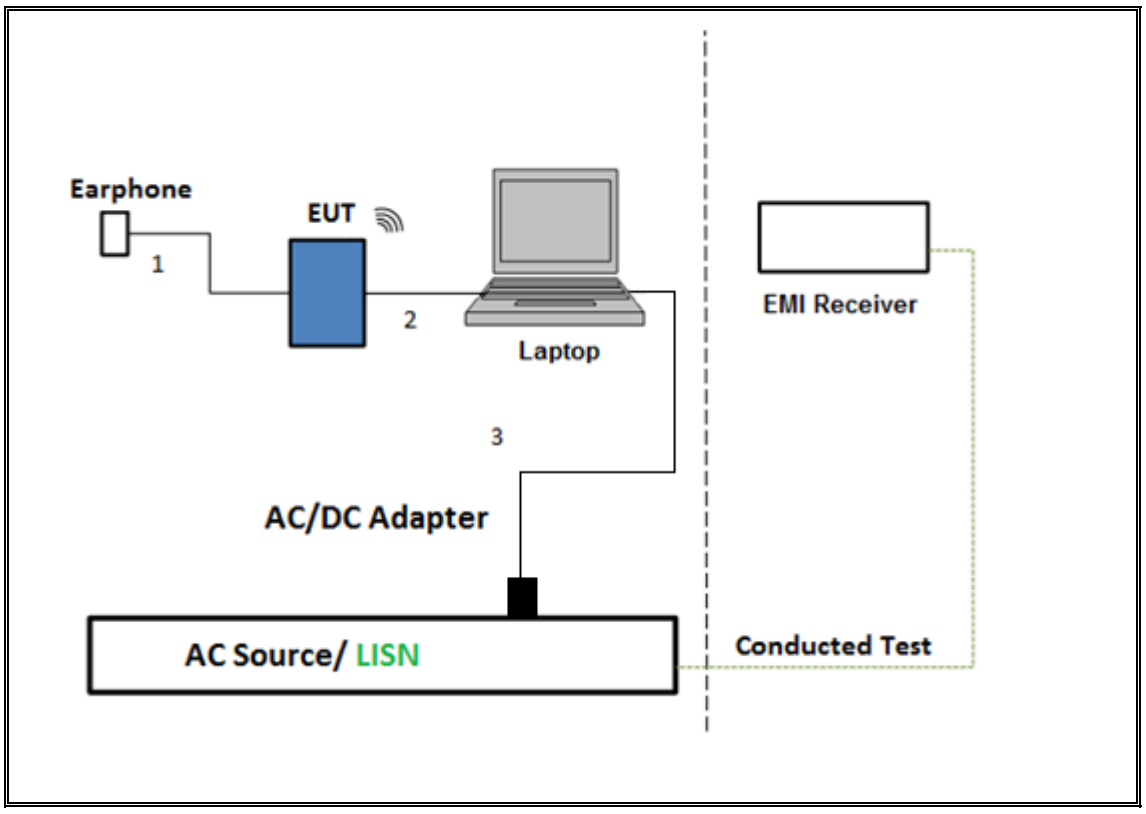

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	**Manufacturer**	**Model**	**Asset**	**Cal Due**
Power Meter, P-series single channel	Agilent	N1911A	T227	10/11/2017
Power Sensor, P - series, 50MHz to 18GHz, Wideband	Agilent	N1921A	T1228	06/20/2017
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	T344	02/22/2017
Antenna, Broadband Hybrid, 30MHz to 2000MHz	Sunol Sciences Corp.	JB3	T407	04/04/2017
RF Amplifier, 1-18GHz	MITEQ	AFS42-00101800-25-S-42	T740	11/29/2017
Amplifier, 10KHz to 1GHz, 32dB	Sonoma Instrument	310	T286	05/04/2017
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent (Keysight) Technologies	N9030A	T905	06/21/2017
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	T346	02/22/2017
Antenna, Broadband Hybrid, 30MHz to 2000MHz	Sunol Sciences Corp.	JB3	T408	11/10/2017
RF Amplifier, 1-18GHz	MITEQ	AFS42-00101800-25-S-42	T1131	09/23/2017
Amplifier, 10KHz to 1GHz, 32dB	Sonoma Instrument	310	T285	06/20/2017
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent (Keysight) Technologies	N9030A	T459	06/13/2017
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent (Keysight) Technologies	N9030A	T1210	06/30/2017
Antenna, Horn 18 to 26.5GHz	ARA	MWH-1826/B	T447	06/16/2017
Amplifier, 1 to 26.5GHz, 23.5dB Gain minimum	Keysight	8449B	T402	7/5/2017
Antenna, Horn 26.5GHz to 40GHz	ARA	MWH-2640/B	T446	05/25/2017
Amplifier, 26.5GHz to 40GHz	Miteq	NSP 4000 SP2	T88	04/07/2017
AC Line Conducted				
* EMI Test Receiver 9Khz-7GHz	Rohde & Schwarz	ESCI7	T1436	12/19/2016
LISN for Conducted Emissions CISPR-16	Fischer	50/250-25-2-01	T1310	06/08/2017
UL AUTOMATION SOFTWARE				
Radiated Software	UL	UL EMC	Ver 9.5, April 26, 2016	
Conducted Software	UL	UL EMC	Ver 5.4, October 13, 2016	
AC Line Conducted Software	UL	UL EMC	Ver 9.5, May 26, 2015	

*Testing is completed before equipment expiration date.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

7. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS

7.1. ON TIME AND DUTY CYCLE

LIMITS

None; for reporting purposes only.

PROCEDURE

KDB 789033 Zero-Span Spectrum Analyzer Method.

RESULTS

Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/B Minimum VBW (kHz)
802.11n HT20 1TX	1.915	1.940	0.987	98.71%	0.00	0.010
802.11n HT20 CDD 2TX	1.920	1.945	0.987	98.71%	0.00	0.010
802.11n HT40 1TX	0.945	0.966	0.978	97.83%	0.10	1.058
802.11n HT40 CDD 2TX	0.945	0.966	0.978	97.83%	0.10	1.058
802.11ac VHT80 1TX	0.459	0.482	0.952	95.23%	0.21	2.179
802.11ac VHT80 CDD 2TX	0.460	0.482	0.954	95.44%	0.20	2.174

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

DUTY CYCLE PLOTS

DUTY CYCLE 802.11n HT20 1TX MODE

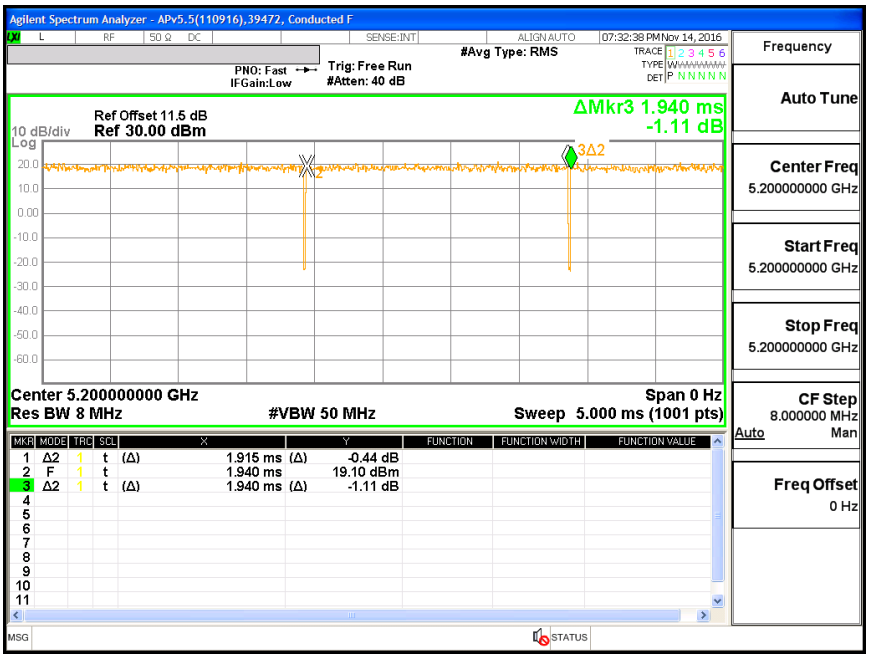

DUTY CYCLE 802.11n HT20 CDD 2TX MODE

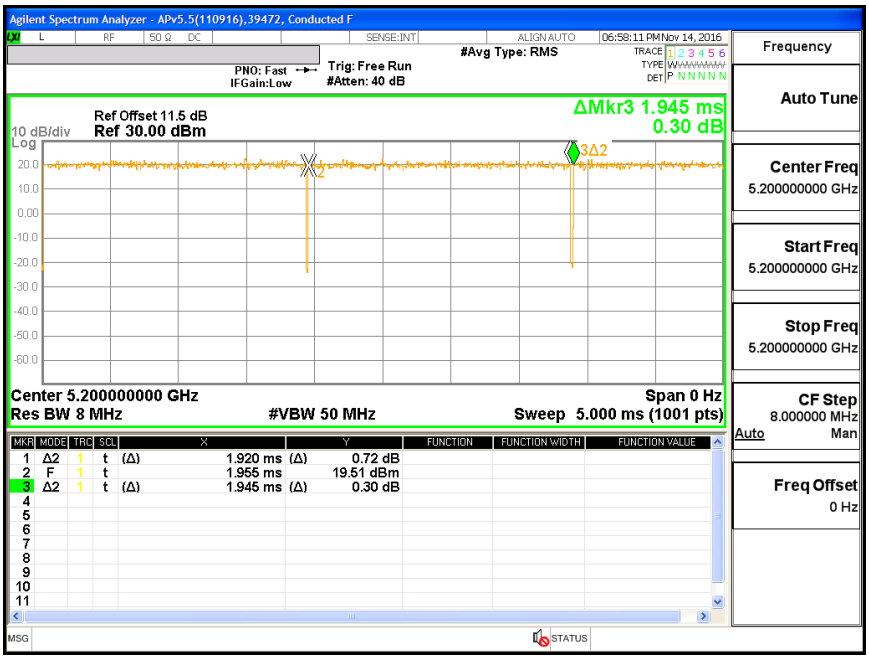

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

DUTY CYCLE 802.11n HT40 1TX MODE

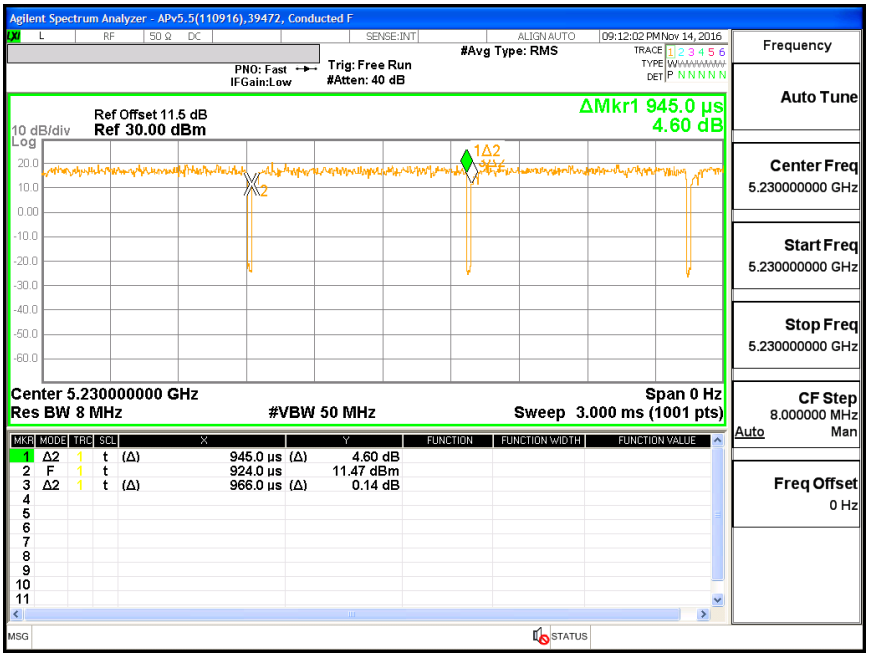

DUTY CYCLE 802.11n HT40 CDD 2TX MODE

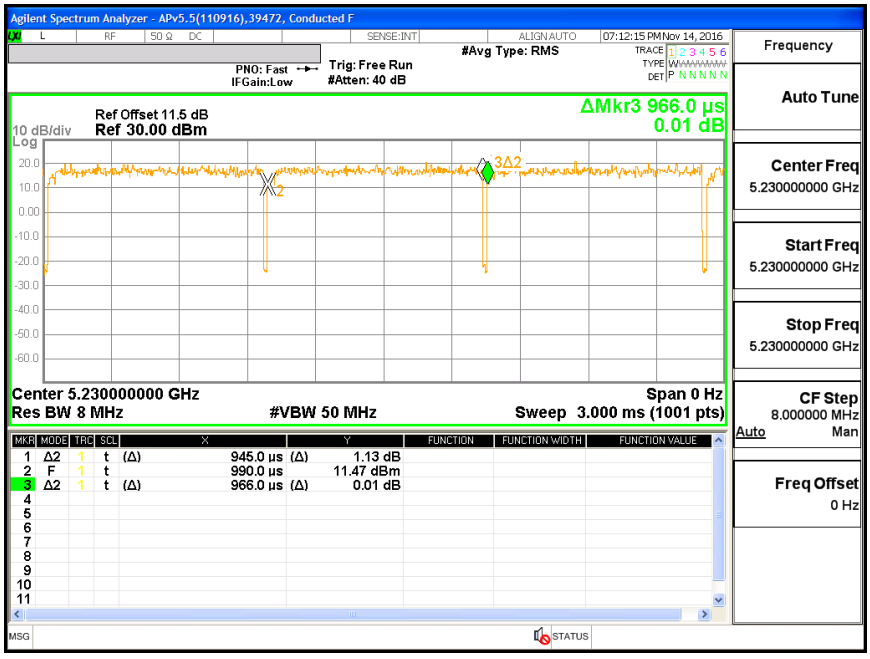

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701J
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

DUTY CYCLE 802.11ac VHT80 1TX MODE

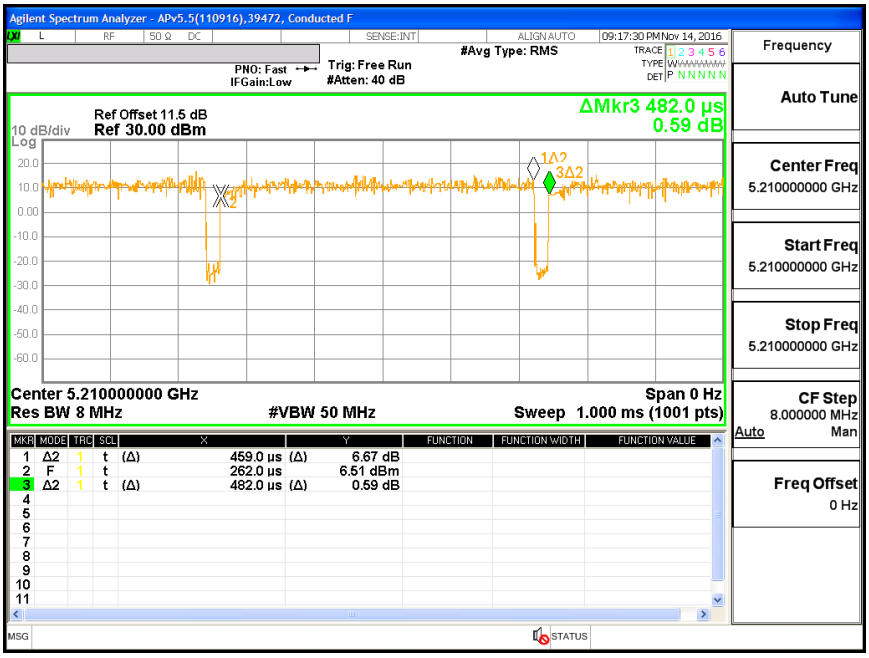

DUTY CYCLE 802.11ac VHT80 CDD 2TX MODE

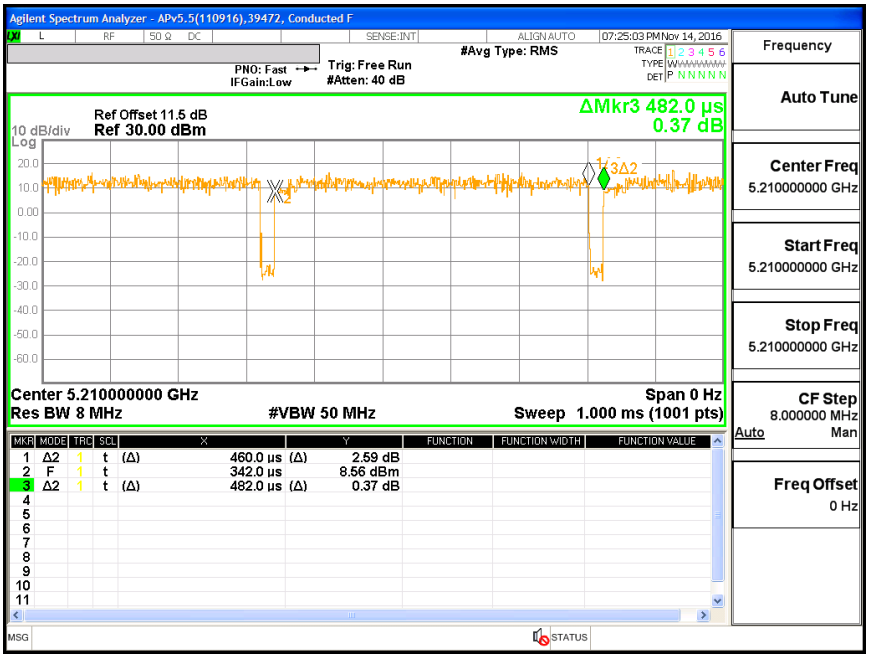

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

7.2. MEASUREMENT METHODS

6 dB Emission BW: KDB 789033 D02 v01r03, Section C.

26 dB Emission BW: KDB 789033 D02 v01r03, Section C.

99% Occupied BW: KDB 789033 D02 v01r03, Section D.

Conducted Output Power: KDB 789033 D02 v01r03, Section E.3.b (Method PM-G).

Power Spectral Density: KDB 789033 D02 v01r03, Section F (Method SA-2).

Unwanted emissions in restricted bands: KDB 789033 D02 v01r03, Sections G.3, G.4, G.5, and G.6.

Unwanted emissions in non-restricted bands: KDB 789033 D02 v01r03, Sections G.3, G.4, and G.5.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8. ANTENNA PORT TEST RESULTS

8.1. 802.11n HT20 ANTENNA A MODE IN THE 5.2 GHz BAND

8.1.1. 26 dB BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5180	22.200
Mid	5200	22.160
High	5240	22.000

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

26 dB BANDWIDTH

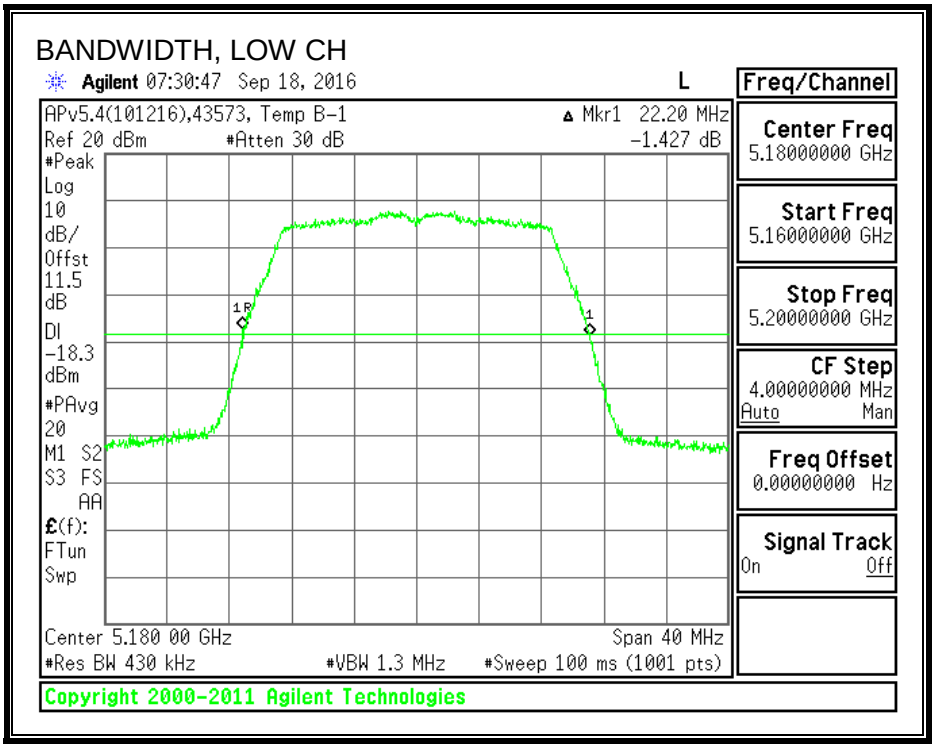

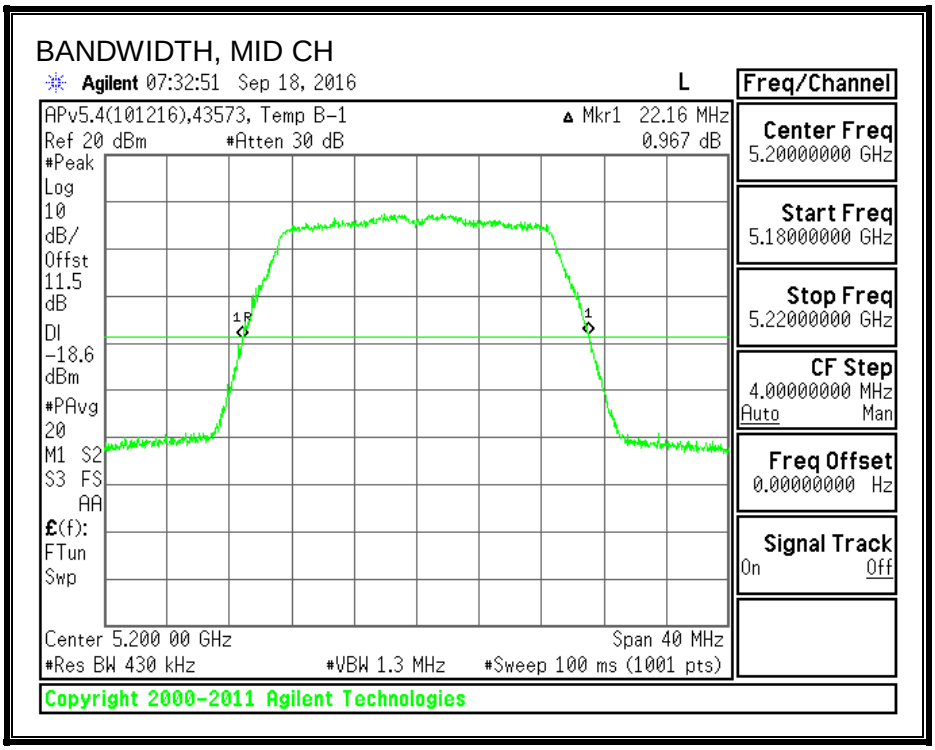

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

BANDWIDTH, HIGH CH

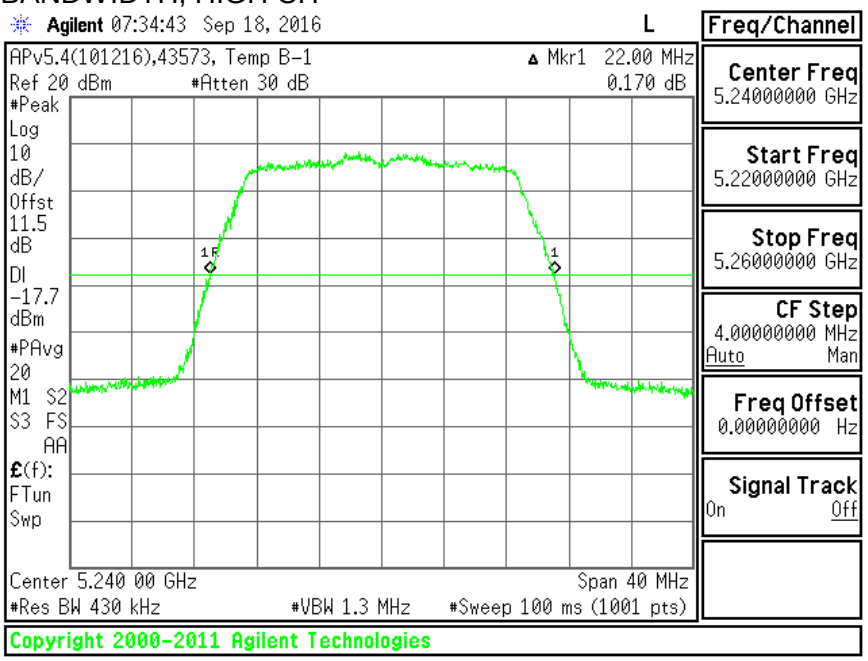

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.1.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% BW (MHz)
Low	5180	17.677
Mid	5200	17.691
High	5240	17.701

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

99% BANDWIDTH

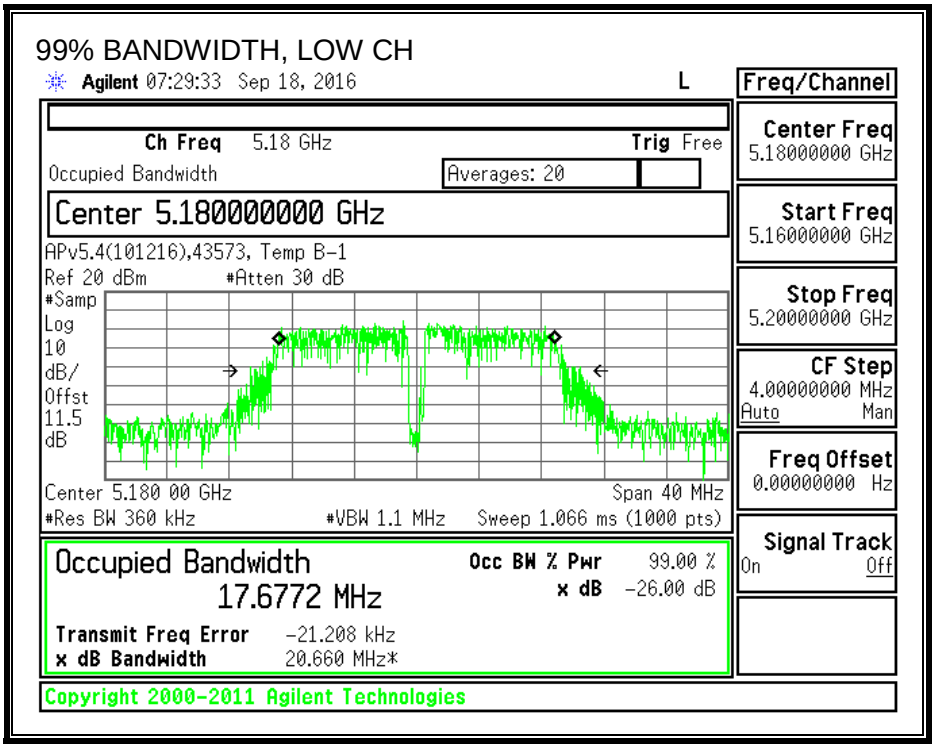

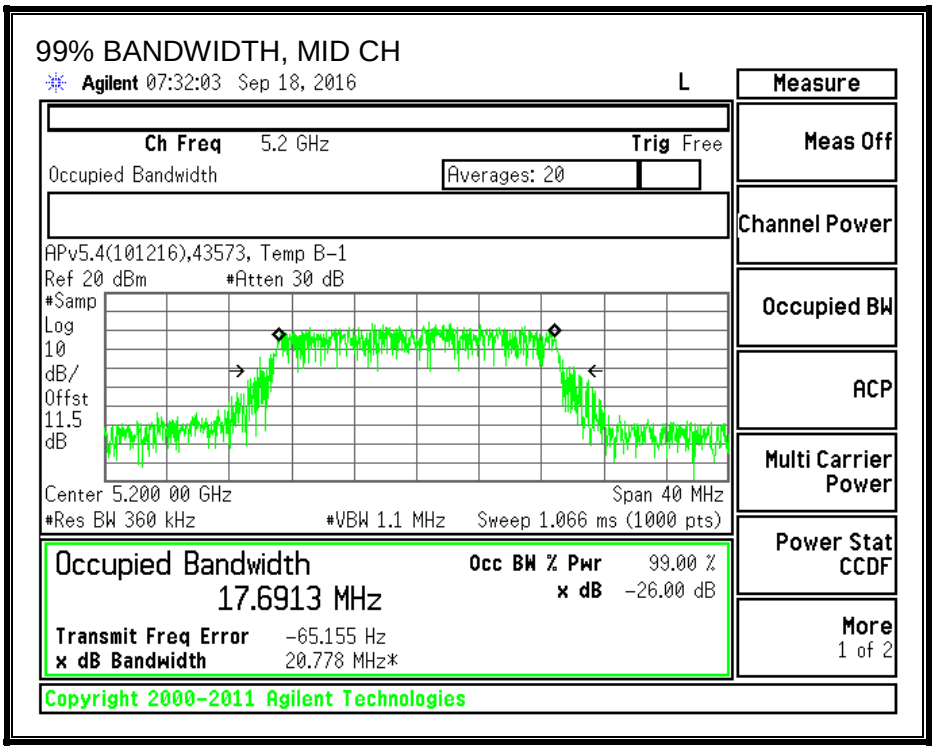

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

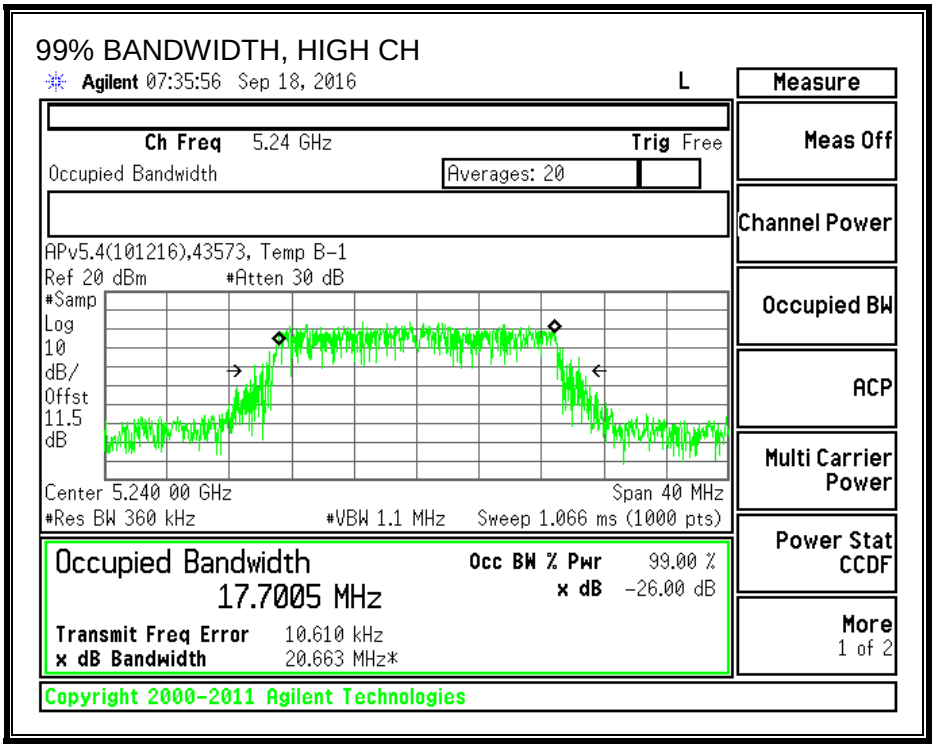

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.1.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	30554	Date:	12/15/16

Channel	Frequency (MHz)	Power (dBm)
Low	5180	15.89
Mid	5200	16.45
High	5240	16.43

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.1.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701J
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

RESULTS

ID:	30554	Date:	12/15/16

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5180	1.27	1.27	24.00	11.00
Mid	5200	1.27	1.27	24.00	11.00
High	5240	1.27	1.27	24.00	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD

Output Power Results

Channel	Frequency (MHz)	Ant A Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	15.89	15.89	24.00	-8.11
Mid	5200	16.45	16.45	24.00	-7.55
High	5240	16.43	16.43	24.00	-7.57

PSD Results

Channel	Frequency (MHz)	Ant A Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5180	4.76	4.76	11.00	-6.24
Mid	5200	5.19	5.19	11.00	-5.81
High	5240	4.90	4.90	11.00	-6.10

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

PSD

PSD, LOW CH

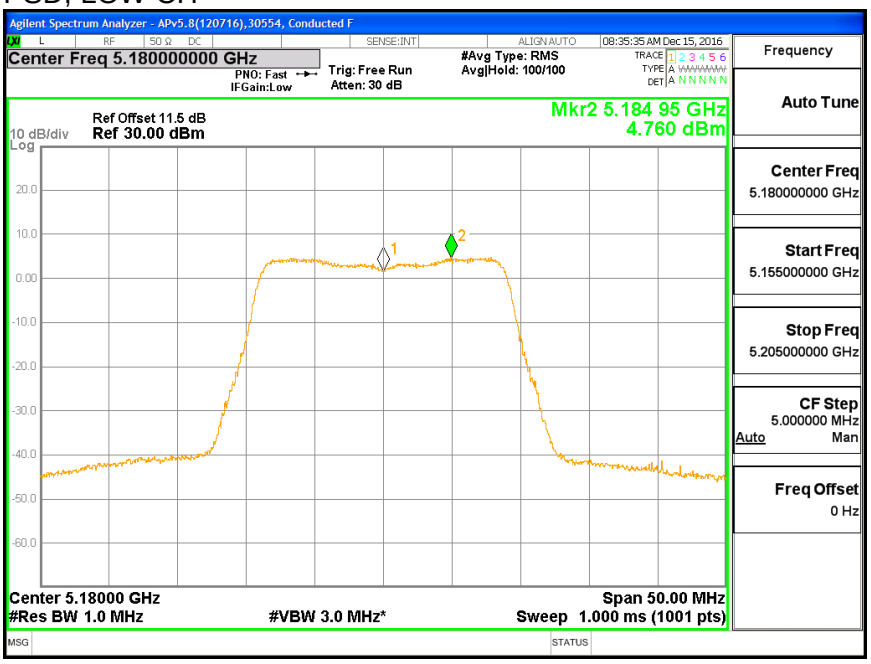

PSD, MID CH

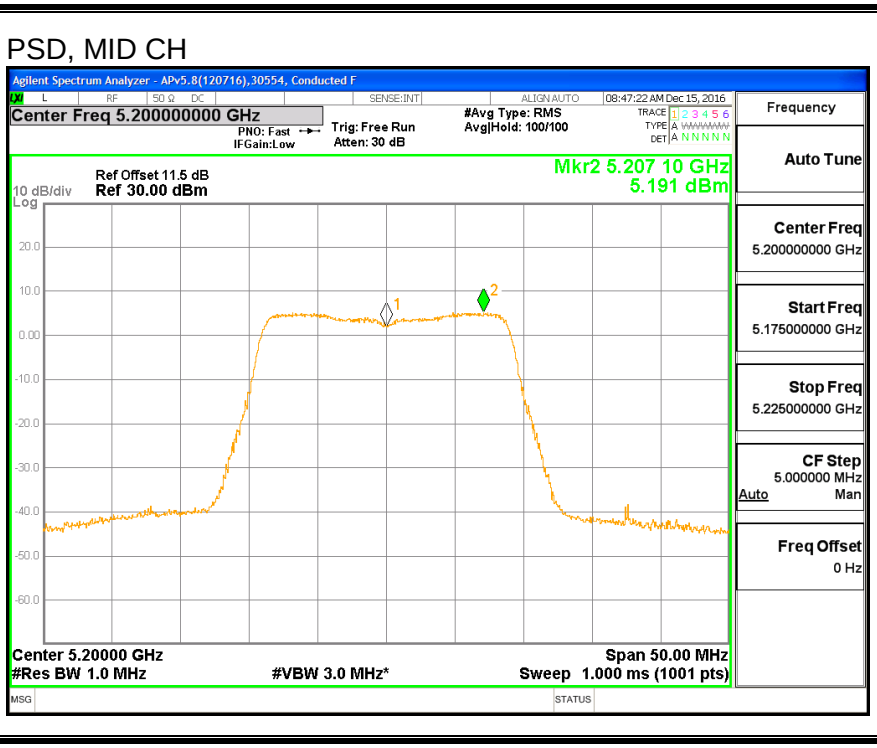

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

PSD, HIGH CH

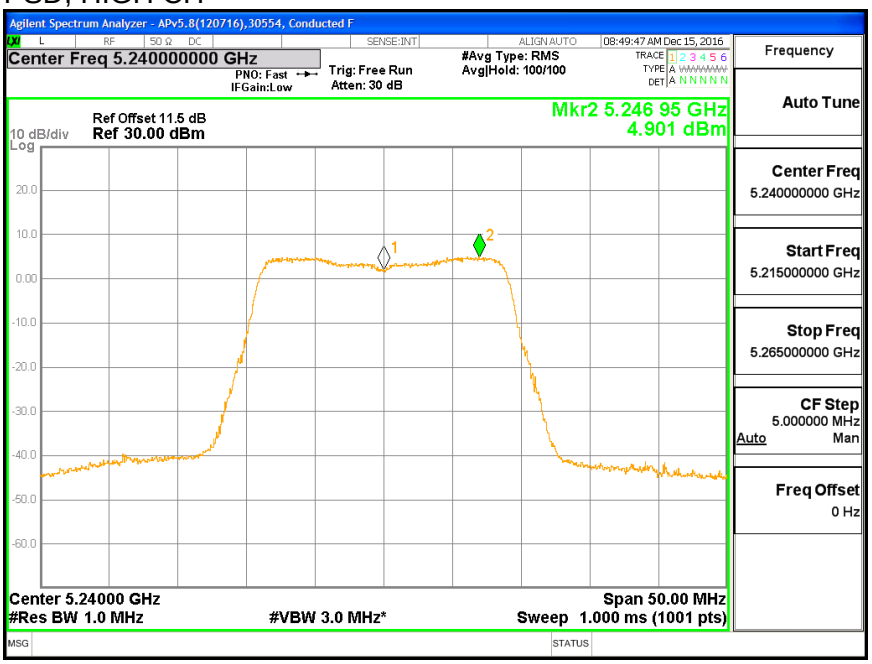

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.2. 802.11n HT20 ANTENNA B MODE IN THE 5.2 GHz BAND

8.2.1. 26 dB BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5180	22.120
Mid	5200	22.160
High	5240	21.960

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

26 dB BANDWIDTH

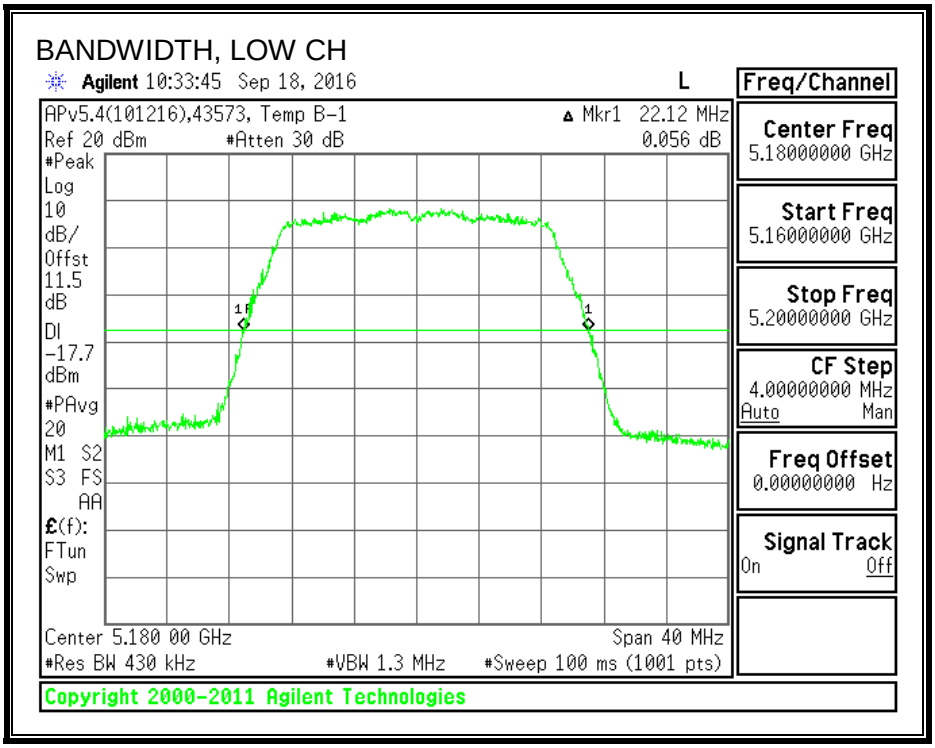

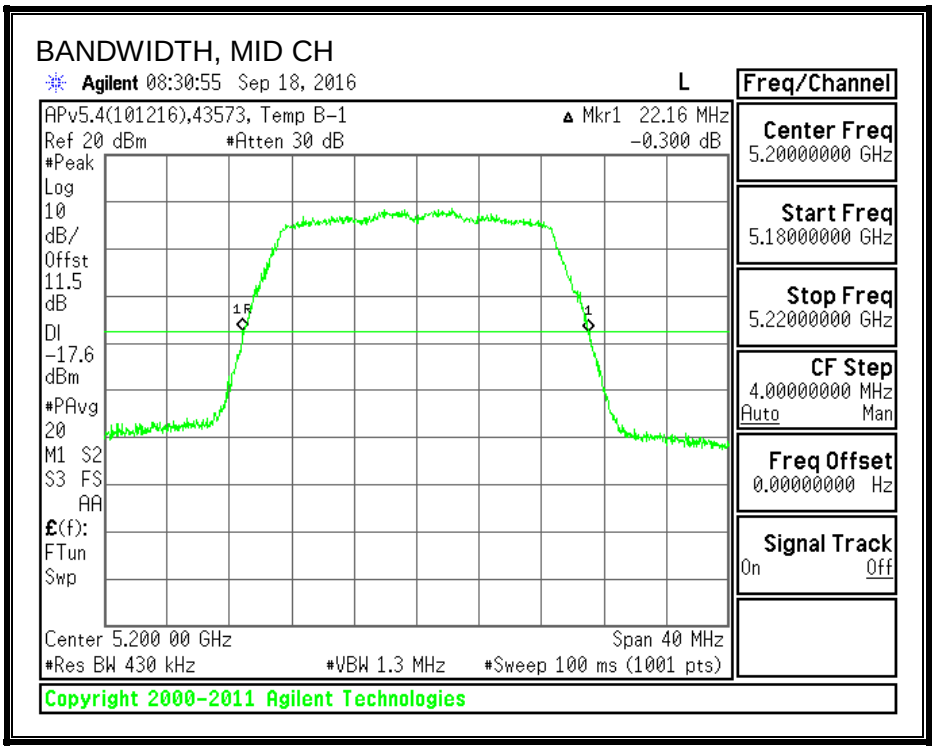

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701J
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

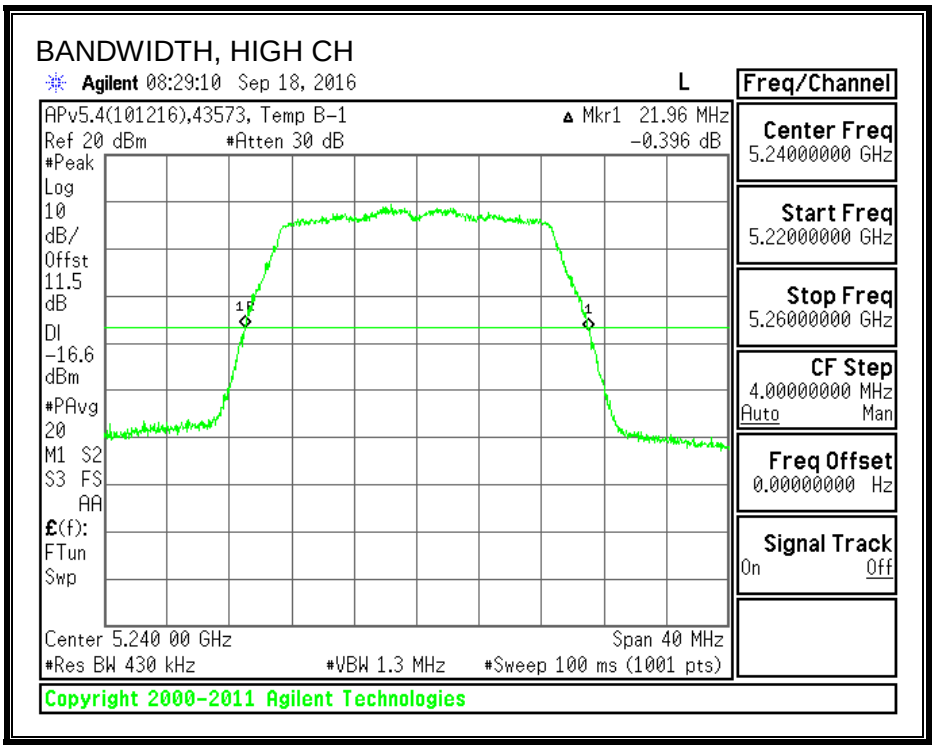

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.2.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% BW (MHz)
Low	5180	17.703
Mid	5200	17.705
High	5240	17.744

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

99% BANDWIDTH

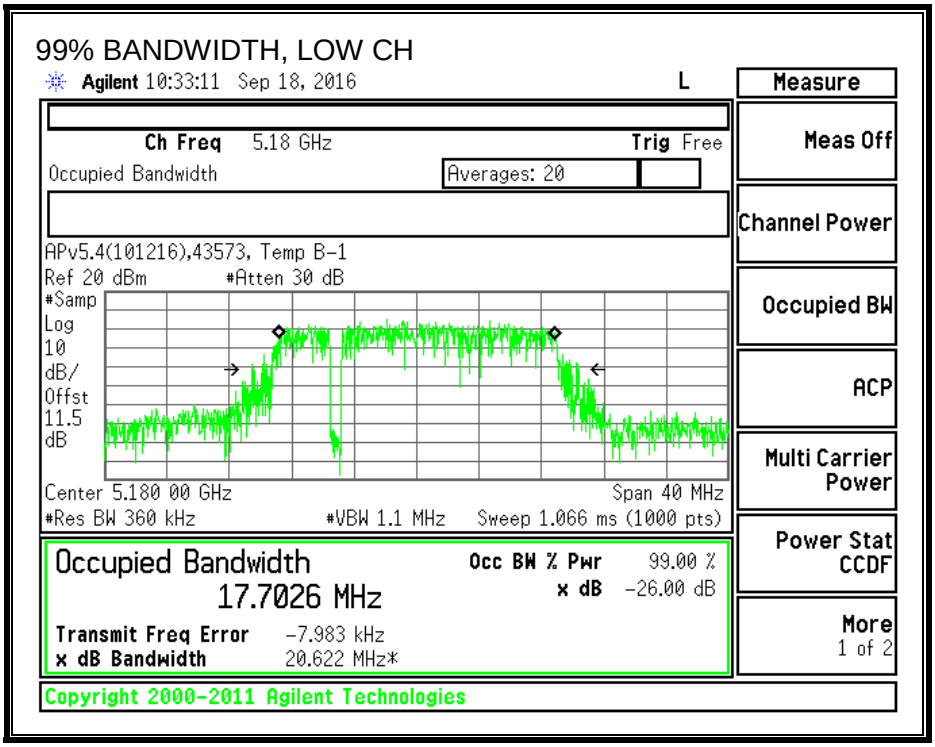

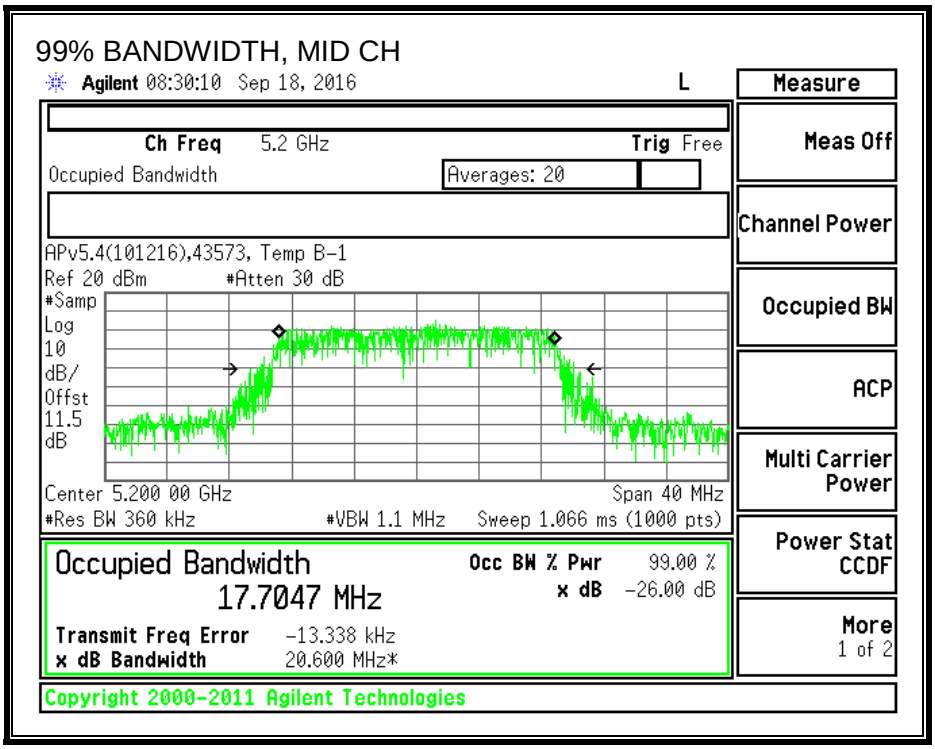

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701J
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

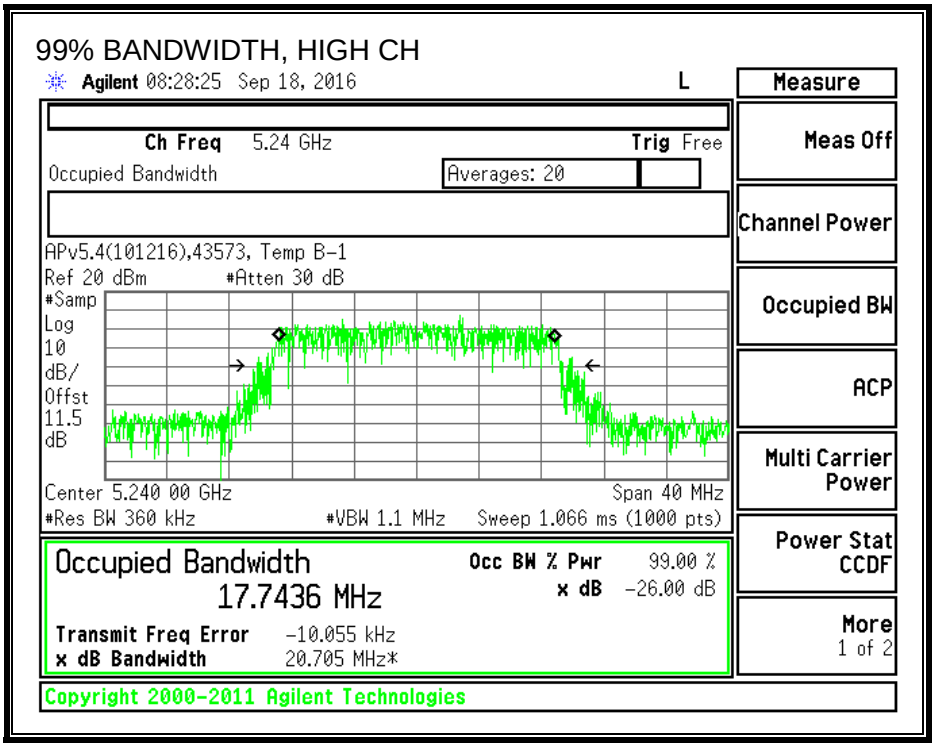

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.2.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	30554	Date:	12/15/16

Channel	Frequency (MHz)	Power (dBm)
Low	5180	15.91
Mid	5200	16.42
High	5240	16.46

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.2.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

RESULTS

ID:	30554	Date:	12/15/16

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5180	2.64	2.64	24.00	11.00
Mid	5200	2.64	2.64	24.00	11.00
High	5240	2.64	2.64	24.00	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD

Output Power Results

Channel	Frequency (MHz)	Ant B Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	15.91	15.91	24.00	-8.09
Mid	5200	16.42	16.42	24.00	-7.58
High	5240	16.46	16.46	24.00	-7.54

PSD Results

Channel	Frequency (MHz)	Ant B Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5180	4.91	4.91	11.00	-6.09
Mid	5200	5.38	5.38	11.00	-5.62
High	5240	5.14	5.14	11.00	-5.86

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

PSD

PSD, LOW CH

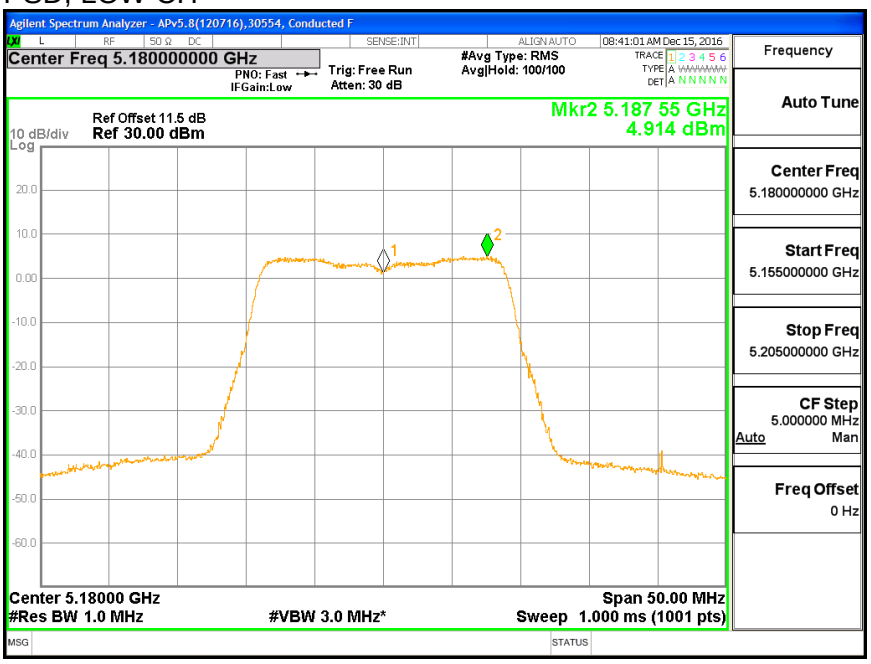

PSD, MID CH

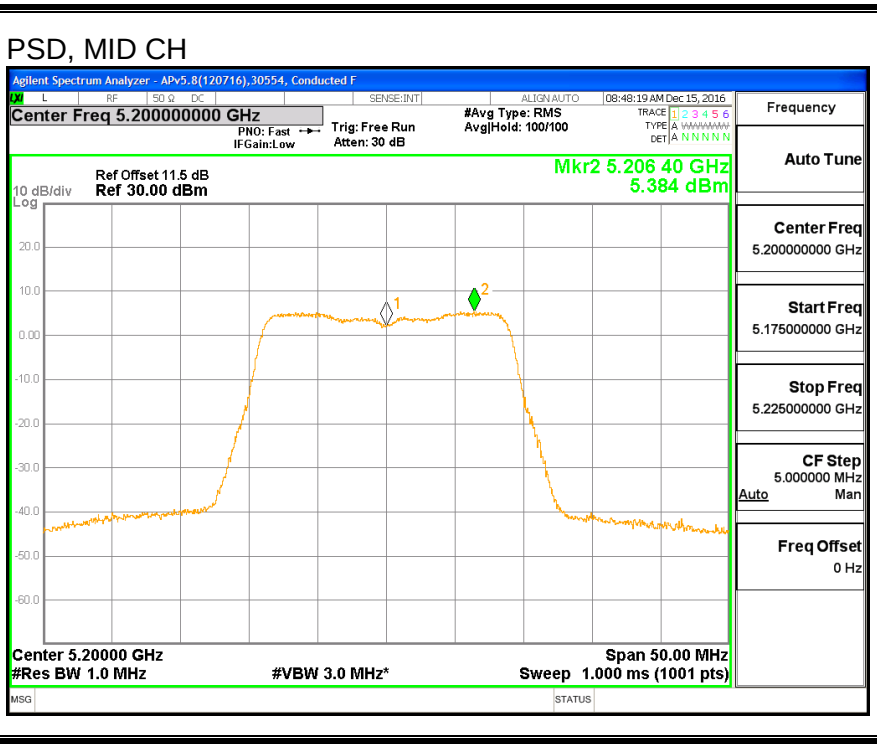

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

PSD, HIGH CH

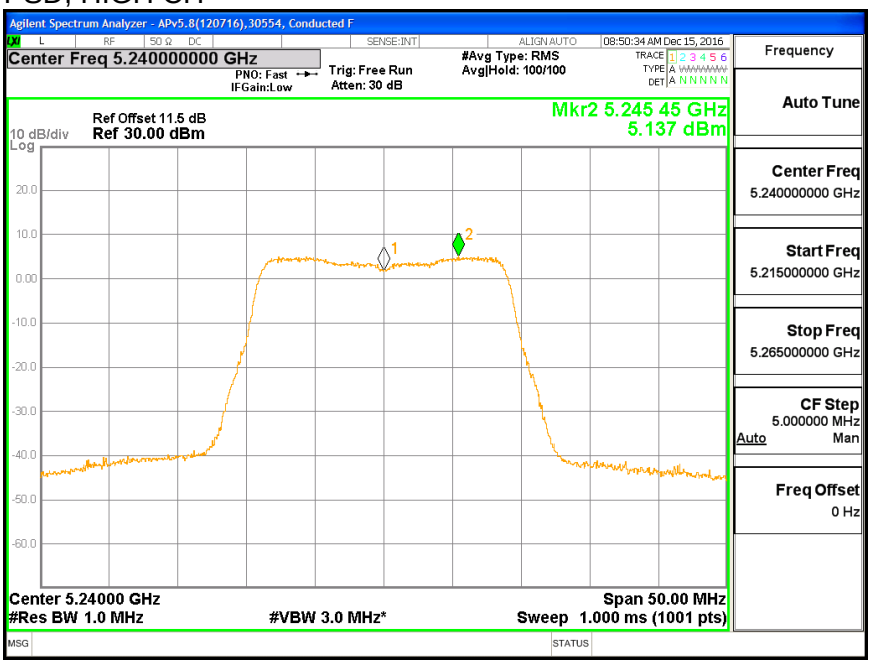

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.3. 802.11n HT20 2Tx (ANTENNA A + ANTENNA B) CDD MODE IN THE 5.2 GHz BAND

8.3.1. 26 dB BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB BW Ant A (MHz)	26 dB BW Ant B (MHz)
Low	5180	22.04	21.68
Mid	5200	22.16	21.72
High	5240	22.00	21.68

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

26 DB BANDWIDTH, ANTENNA A

BANDWIDTH, LOW CH

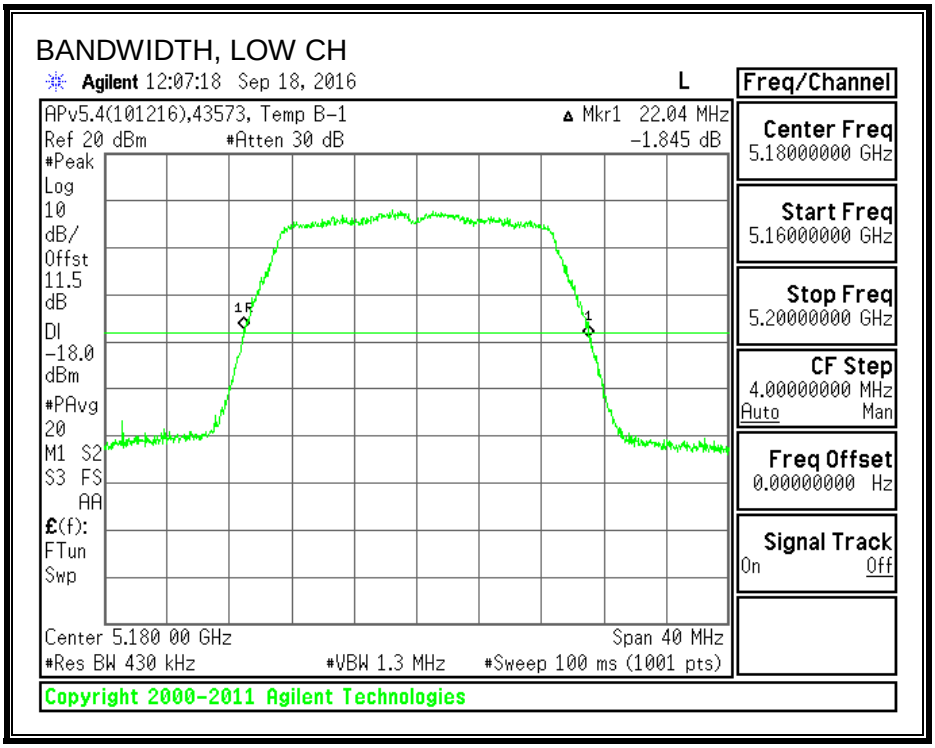

BANDWIDTH, MID CH

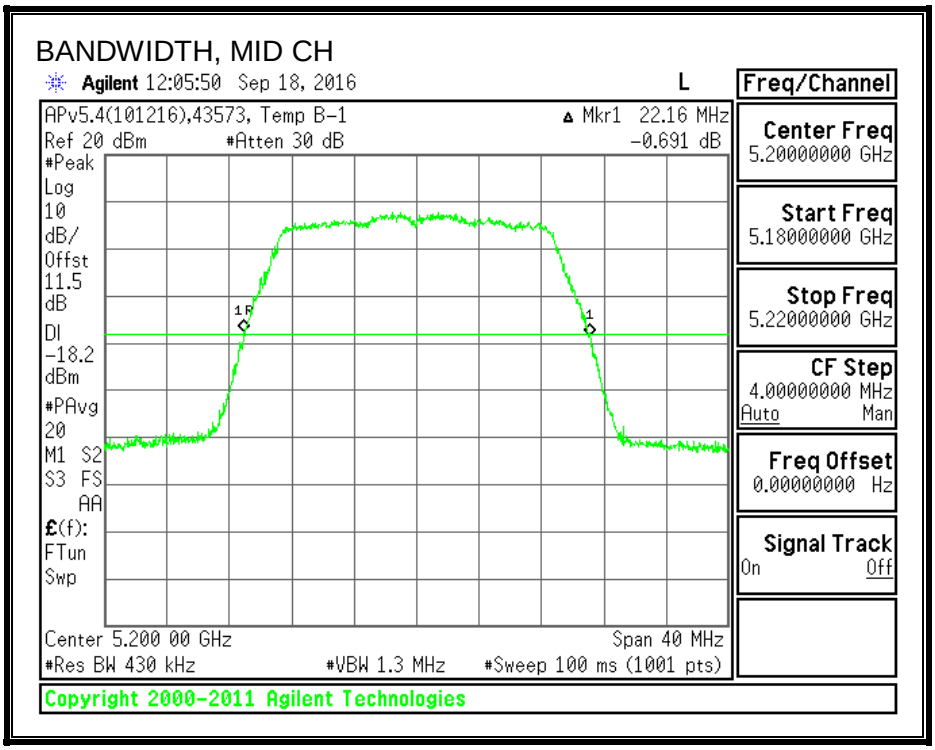

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

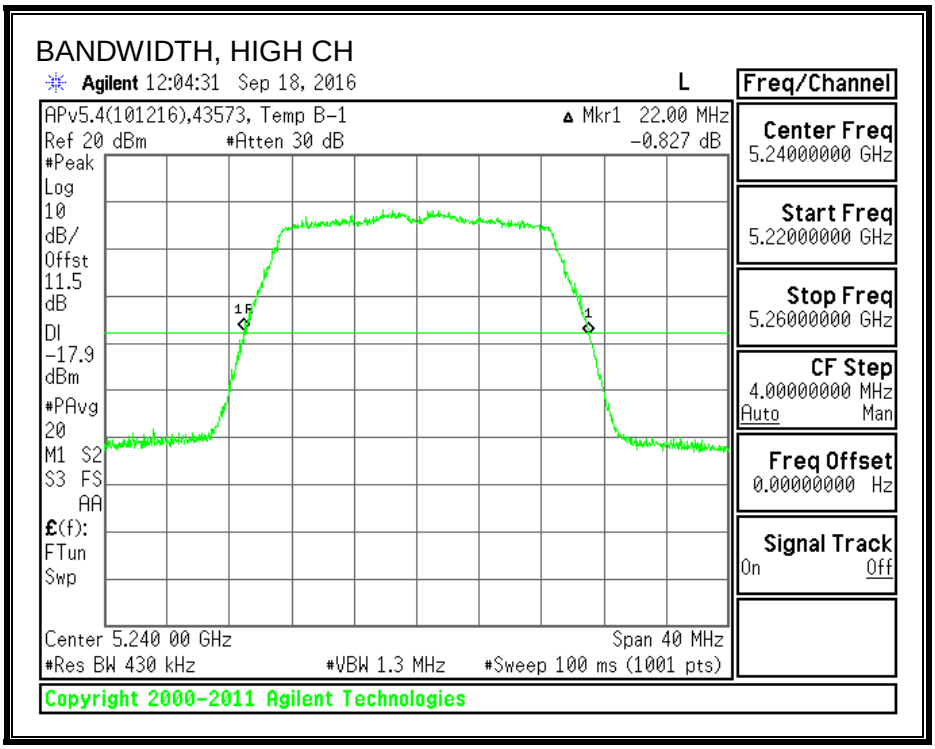

26 DB BANDWIDTH, ANTENNA B

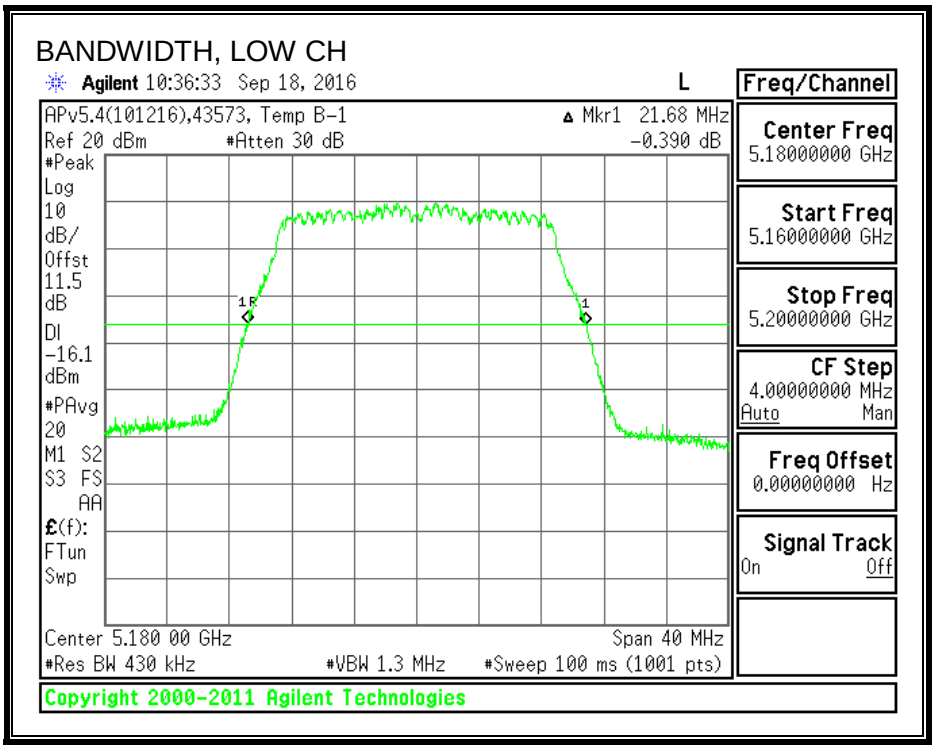

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

BANDWIDTH, MID CH

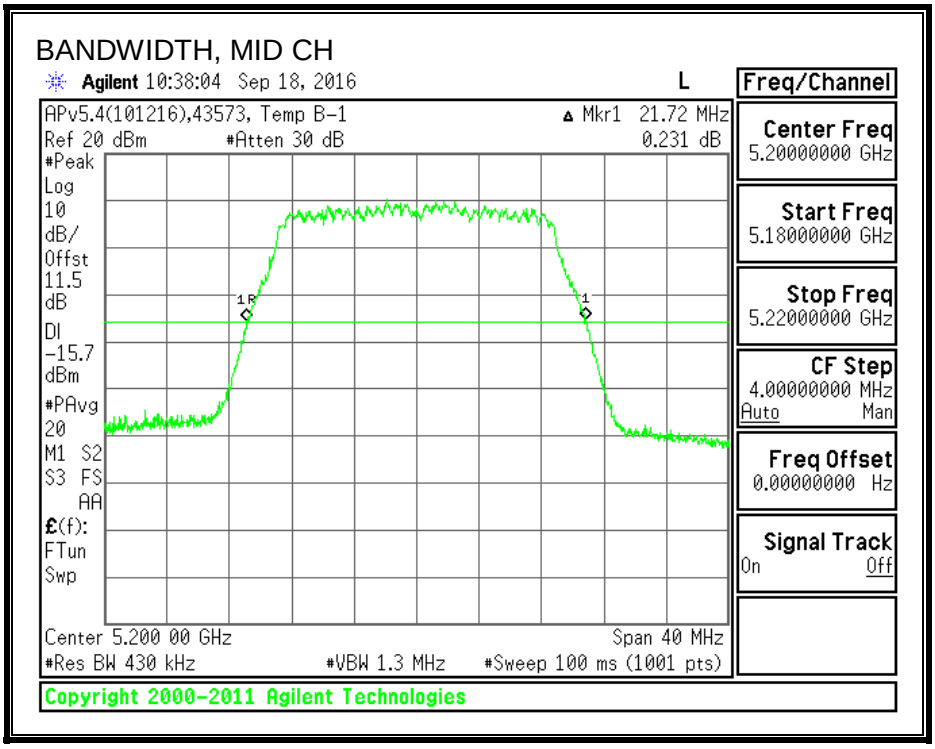

BANDWIDTH, HIGH CH

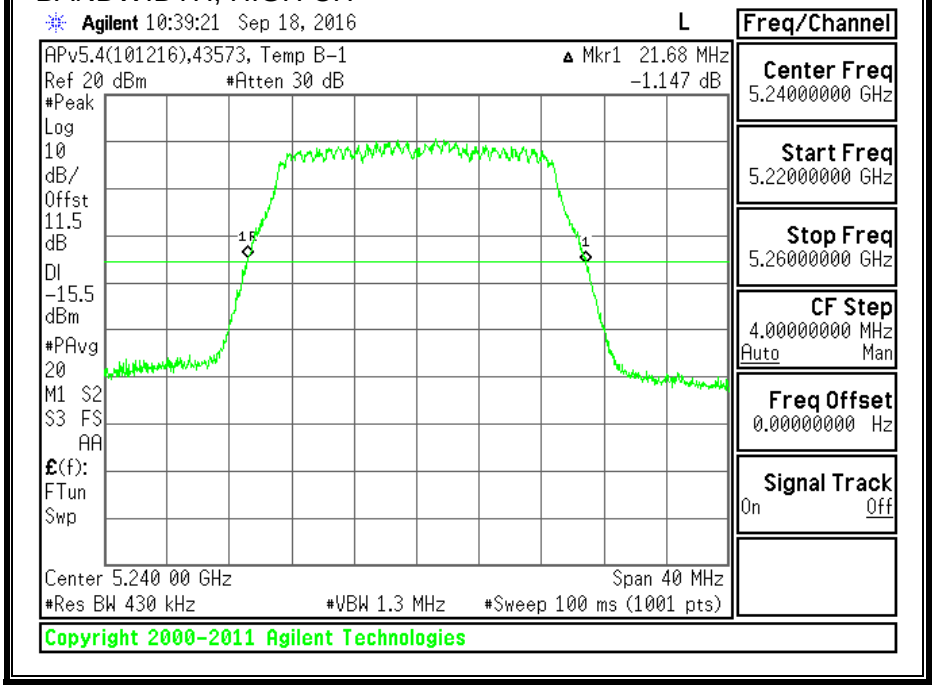

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.3.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% BW Ant A (MHz)	99% BW Ant B (MHz)
Low	5180	17.7098	17.6937
Mid	5200	17.7248	17.6736
High	5240	17.7530	17.6508

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

99% BANDWIDTH, ANTENNA A

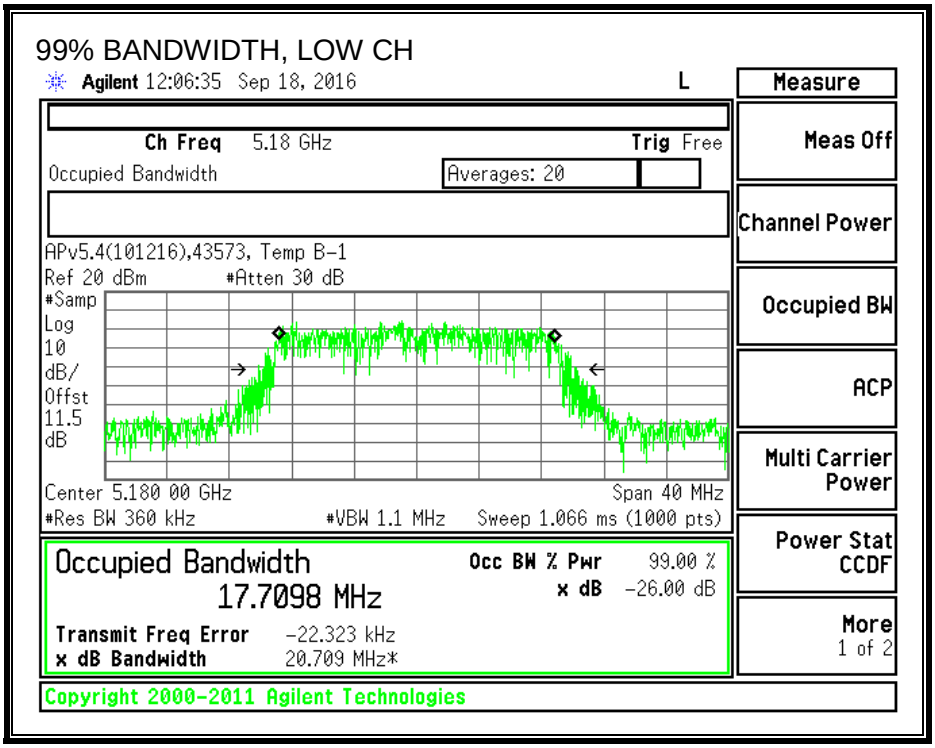

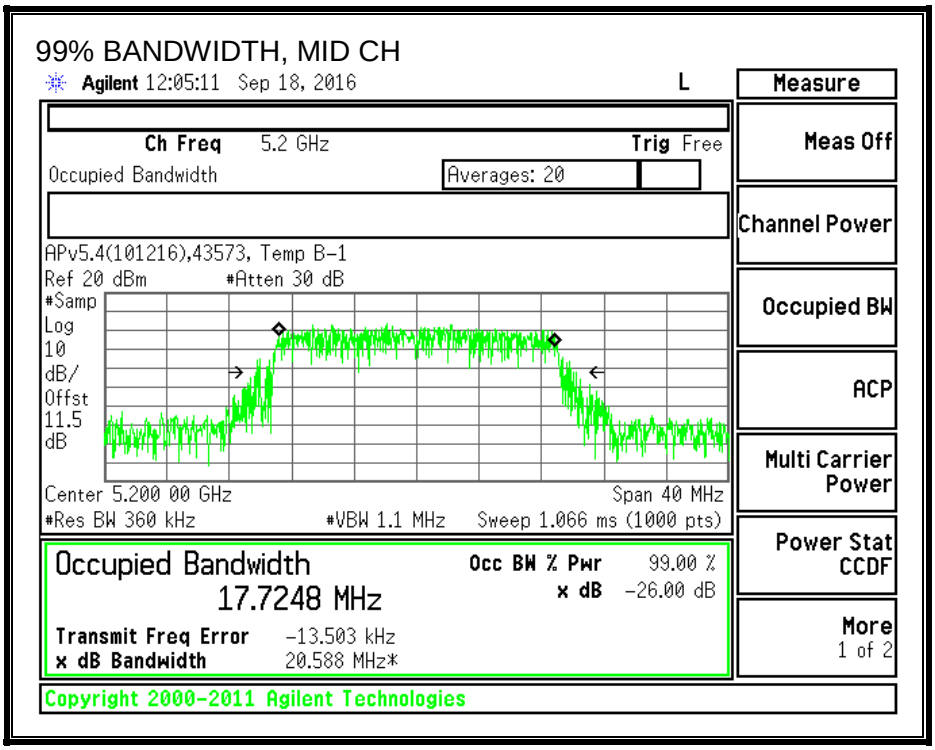

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

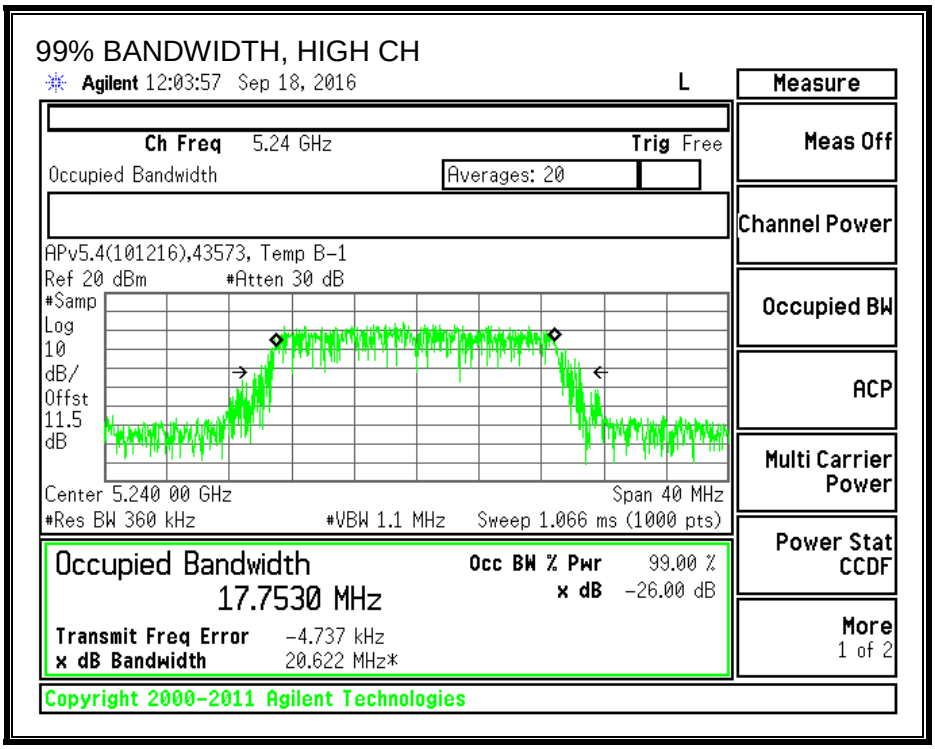

99% BANDWIDTH, ANTENNA B

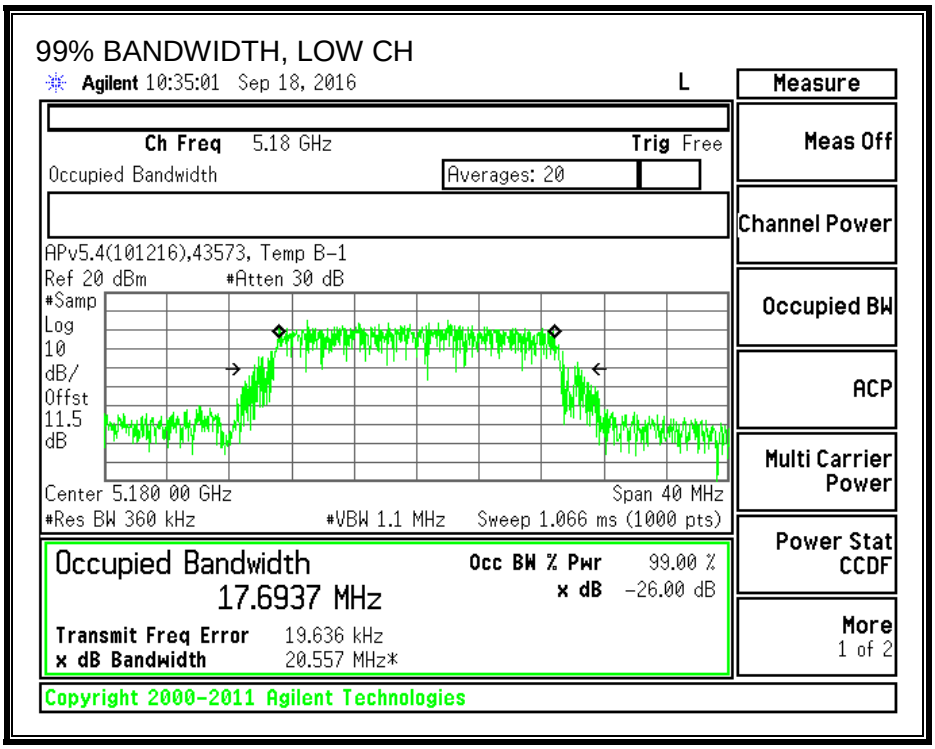

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

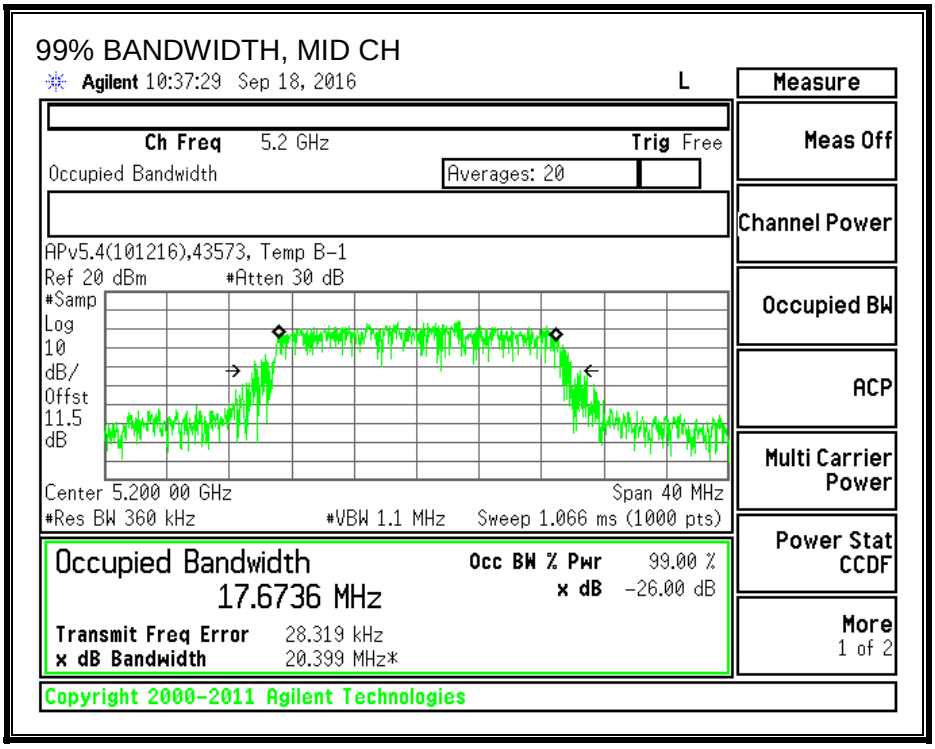

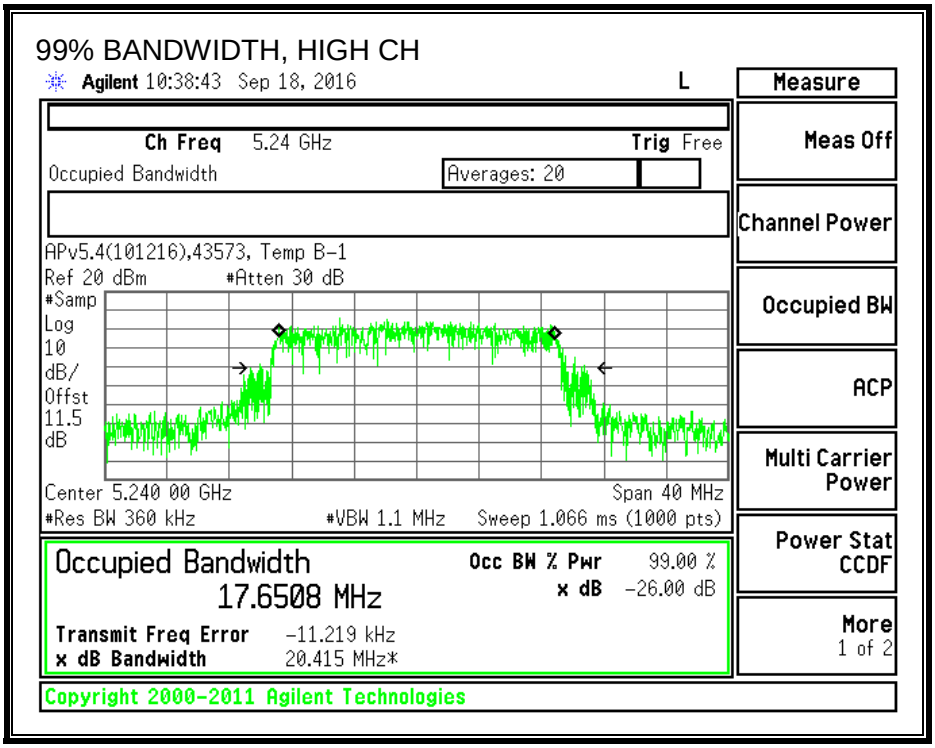

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.3.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	39316	Date:	12/16/16

Average Power Results

Channel	Frequency (MHz)	Ant A Power (dBm)	Ant B Power (dBm)	Total Power (dBm)
Low	5180	14.48	14.44	17.47
Mid	5200	16.49	16.44	19.48
High	5240	16.47	16.32	19.41

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.3.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Ant A Antenna Gain (dBi)	Ant B Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
1.27	2.64	2.01

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

Ant A Antenna Gain (dBi)	Ant B Antenna Gain (dBi)	Correlated Chains Directional Gain (dBi)
1.27	2.64	4.99

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

RESULTS

ID:	39316	Date:	12/16/16

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5180	2.01	4.99	24.00	11.00
Mid	5200	2.01	4.99	24.00	11.00
High	5240	2.01	4.99	24.00	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD

Output Power Results

Channel	Frequency (MHz)	Ant A Meas Power (dBm)	Ant B Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	14.48	14.44	17.47	24.00	-6.53
Mid	5200	16.49	16.44	19.48	24.00	-4.52
High	5240	16.47	16.32	19.41	24.00	-4.59

PSD Results

Channel	Frequency (MHz)	Ant A Meas PSD (dBm)	Ant B Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5180	4.09	3.58	6.86	11.00	-4.14
Mid	5200	5.67	5.57	8.63	11.00	-2.37
High	5240	6.04	5.47	8.77	11.00	-2.23

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701J
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

PSD, ANTENNA A

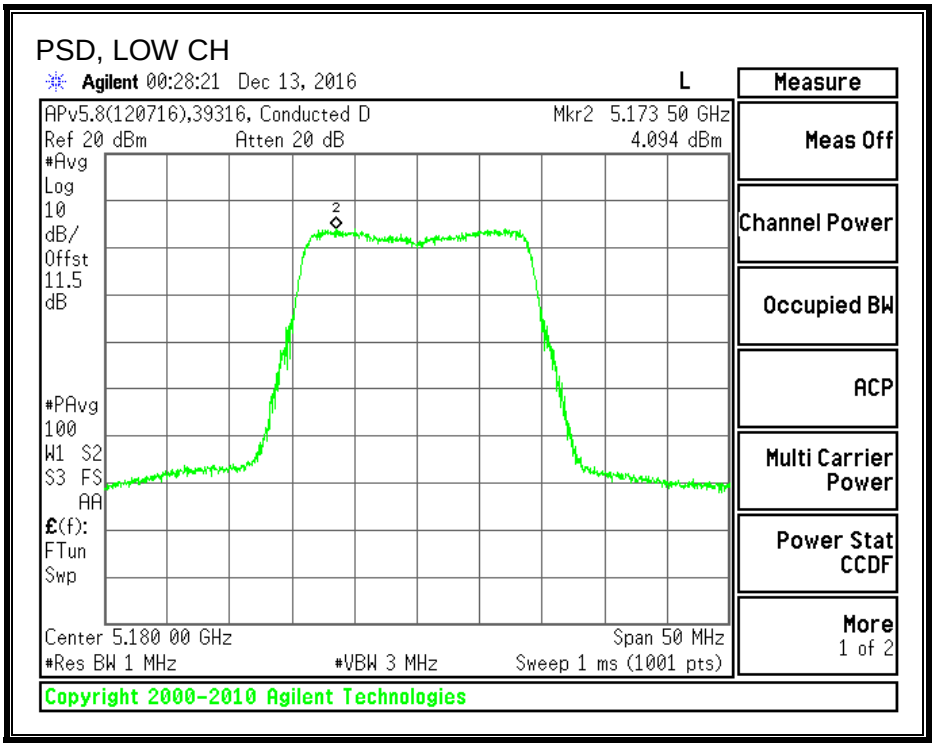

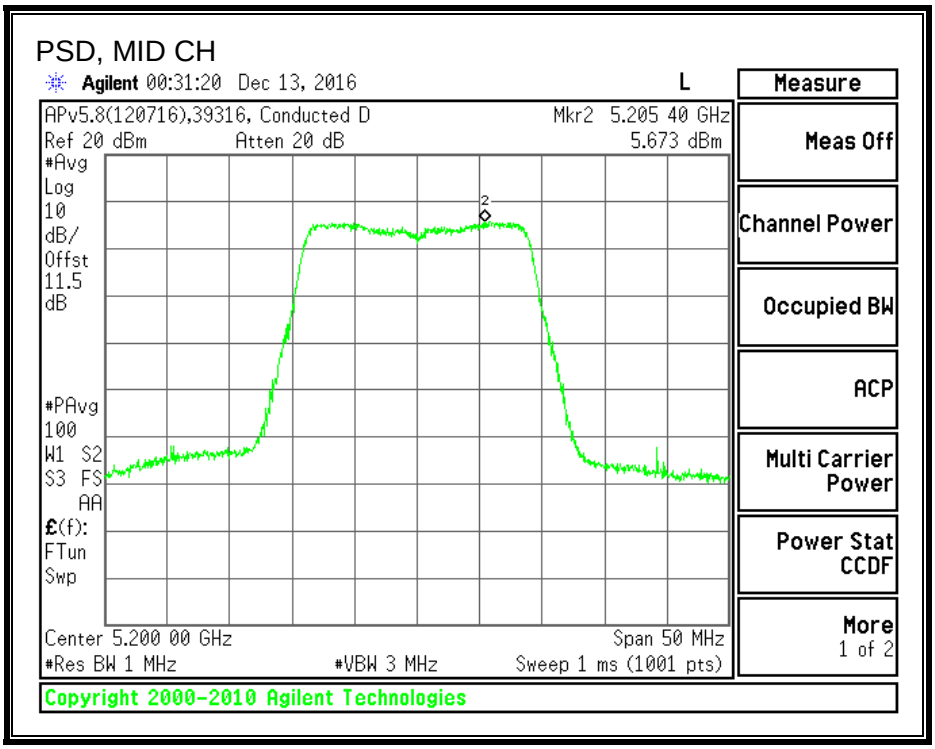

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

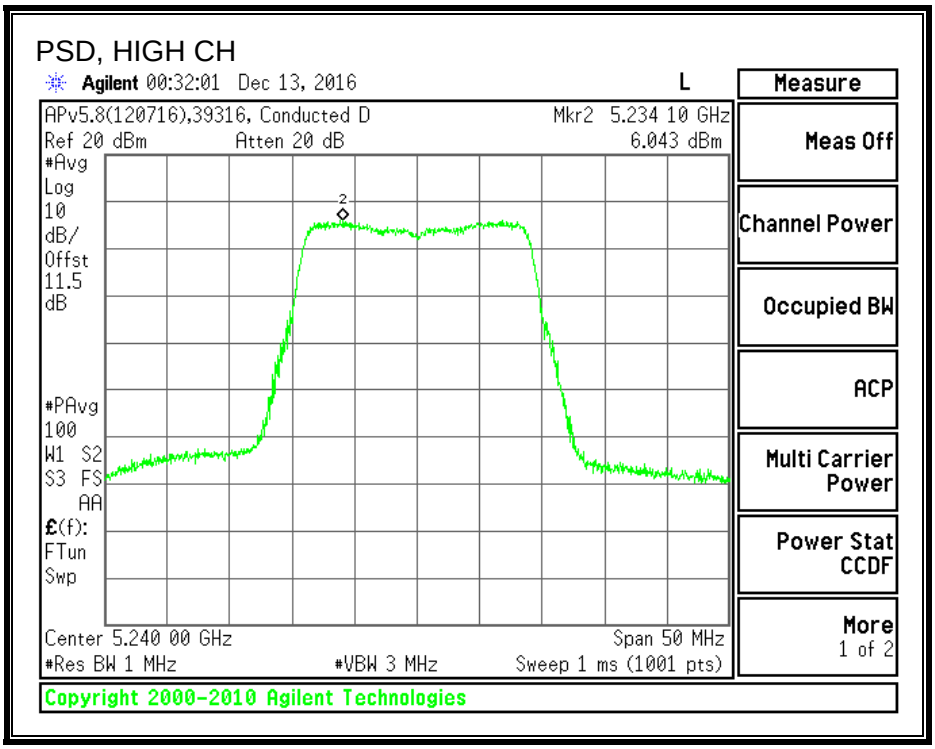

PSD, ANTENNA B

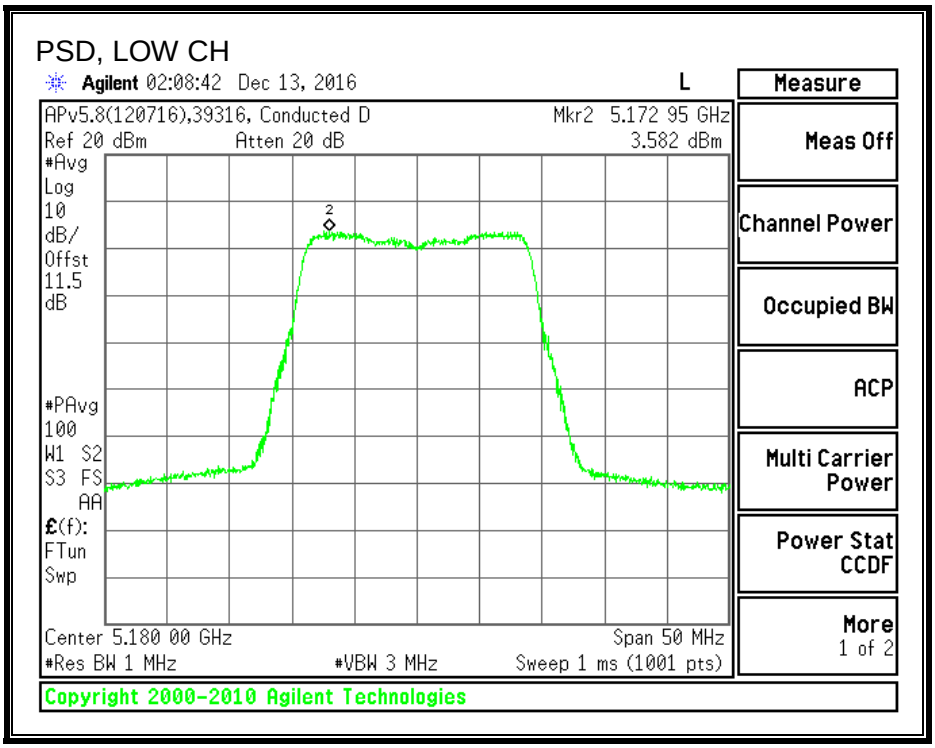

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

PSD, MID CH

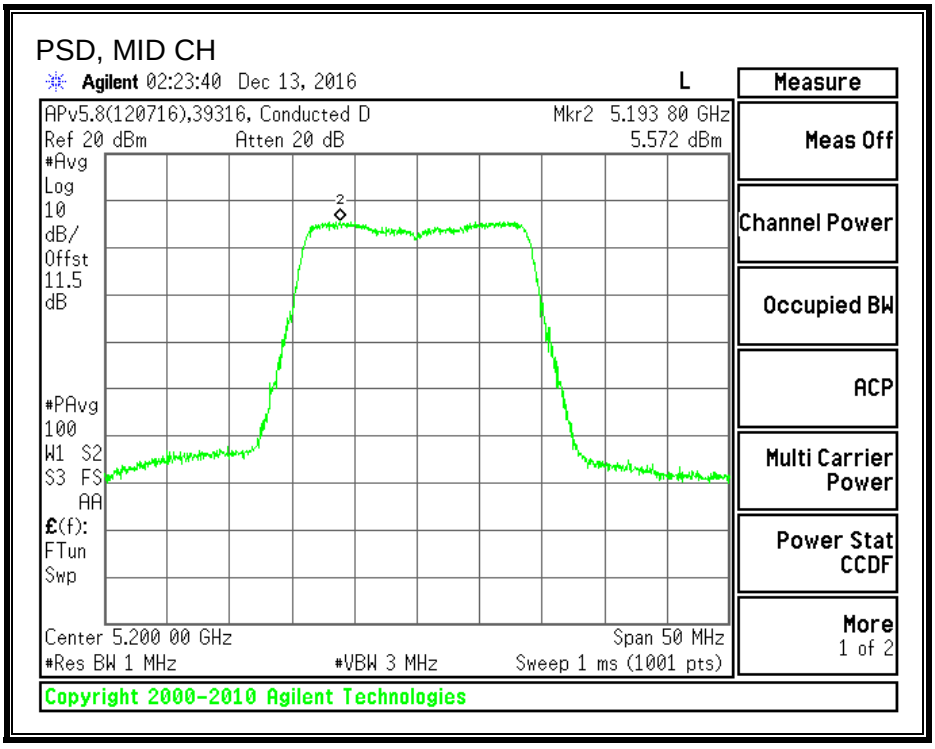

PSD, HIGH CH

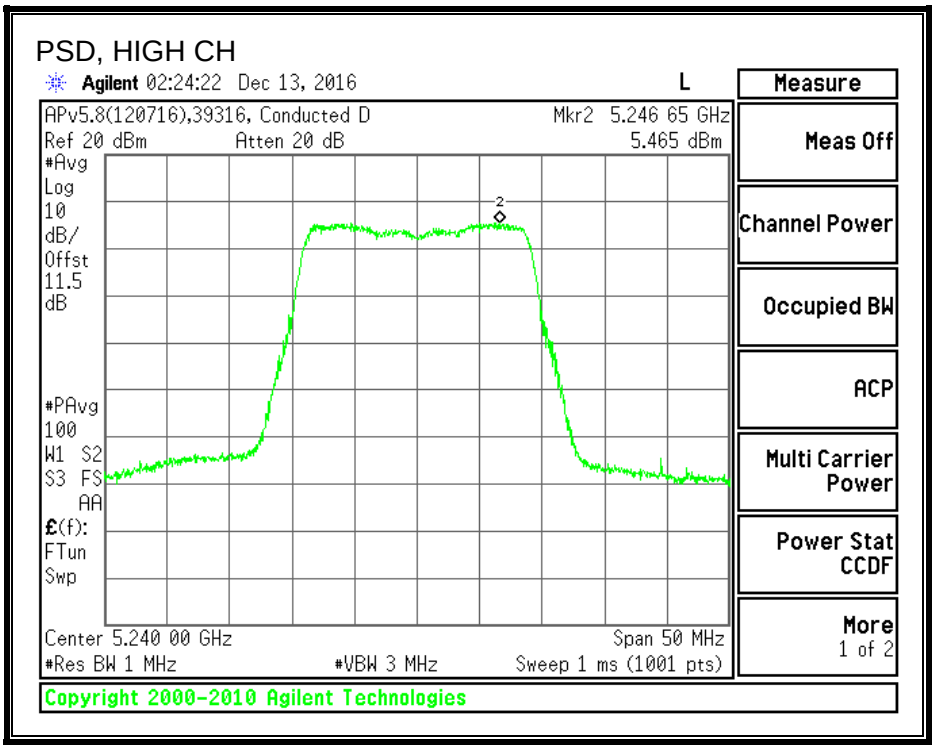

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.4. 802.11n HT20 2Tx (ANTENNA A + ANTENNA B) STBC MODE IN THE 5.2 GHz BAND

Noted: Covered by 802.11n HT20 2Tx (ANTENNA A + ANTENNA B) CDD MODE IN THE 5.2 GHz BAND

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.5. 802.11n HT40 ANTENNA A MODE IN THE 5.2 GHz BAND

8.5.1. 26 dB BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5190	40.640
High	5230	40.560

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

26 dB BANDWIDTH

BANDWIDTH, LOW CH

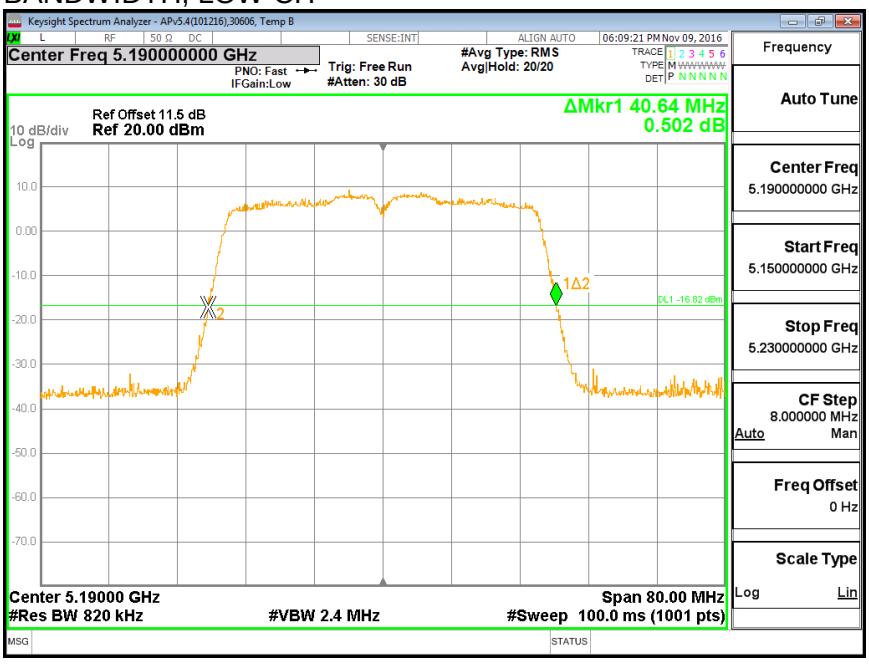

BANDWIDTH, HIGH CH

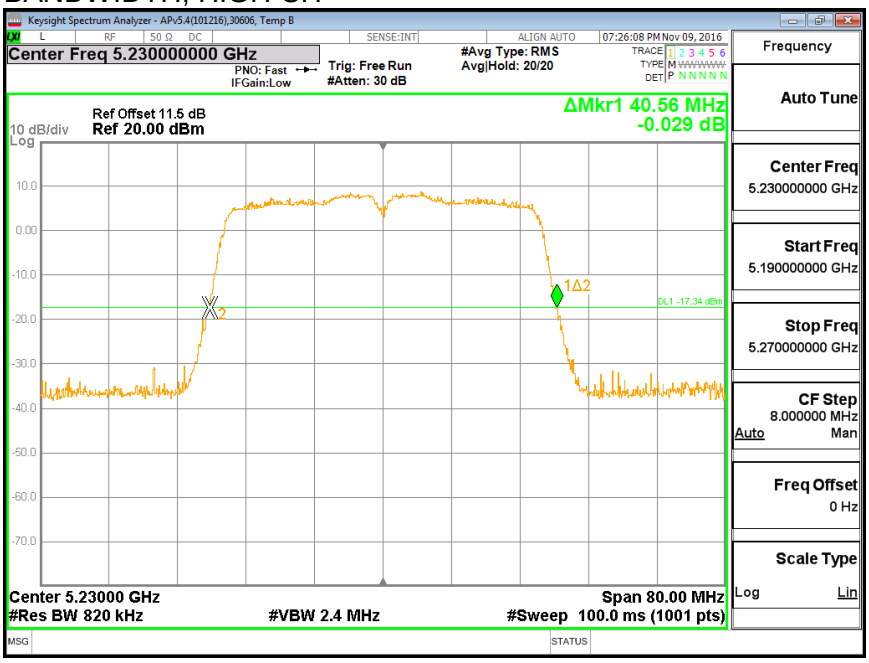

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.5.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5190	36.196
High	5230	36.358

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

99% BANDWIDTH

99% BANDWIDTH, LOW CH

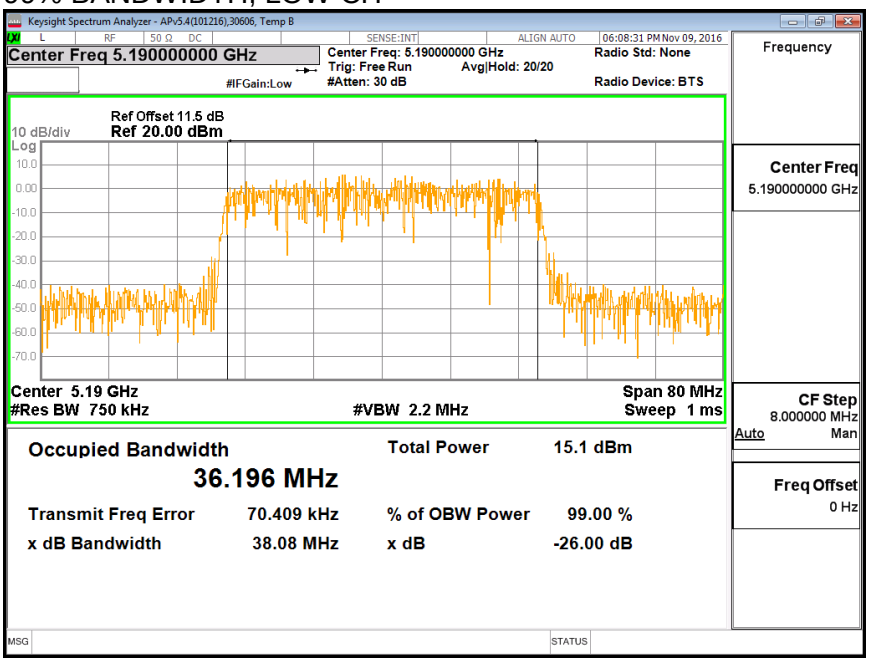

99% BANDWIDTH, HIGH CH

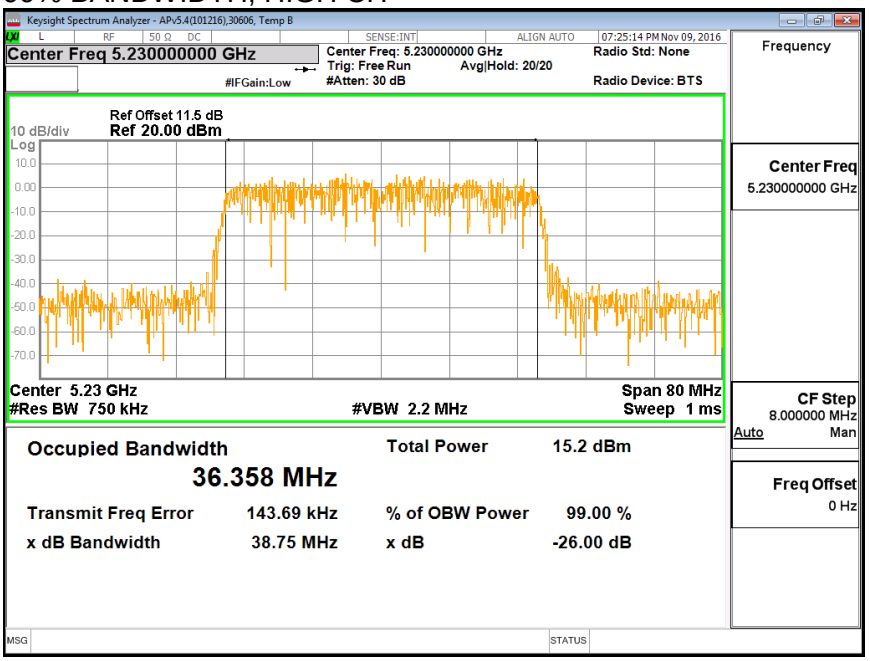

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.5.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	30554	Date:	12/15/16

Channel	Frequency (MHz)	Power (dBm)
Low	5190	14.41
High	5230	16.42

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701J
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.5.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

RESULTS

ID:	30554	Date:	12/15/16

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5190	1.27	1.27	24.00	11.00
High	5230	1.27	1.27	24.00	11.00

Duty Cycle CF (dB)	0.10	Included in Calculations of Corr'PSD

Output Power Results

Channel	Frequency (MHz)	Ant A Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	14.41	14.41	24.00	-9.59
High	5230	16.42	16.42	24.00	-7.58

PSD Results

Channel	Frequency (MHz)	Ant A Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5190	0.139	0.24	11.00	-10.76
High	5230	1.975	2.08	11.00	-8.93

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

PSD

PSD, LOW CH

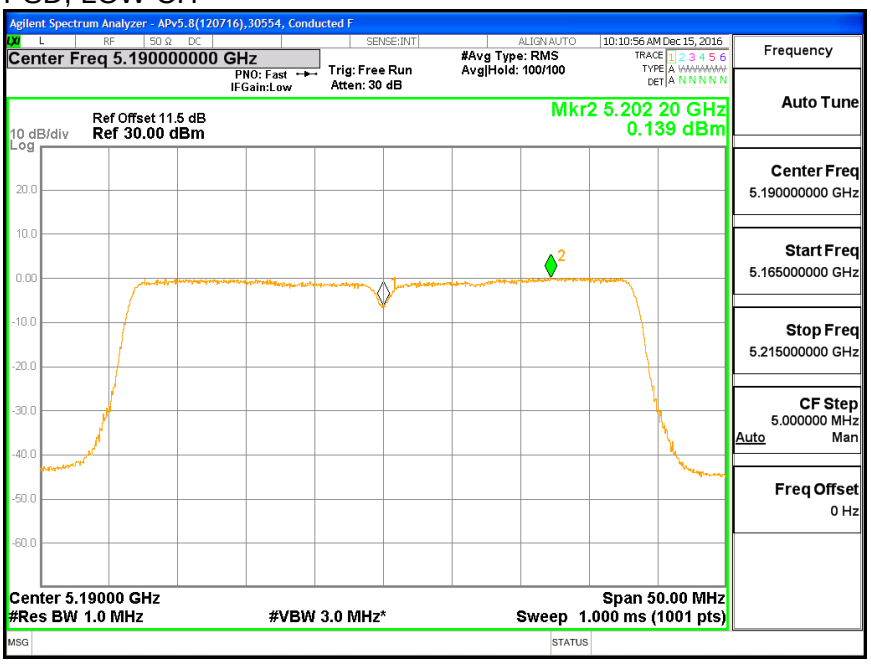

PSD, HIGH CH

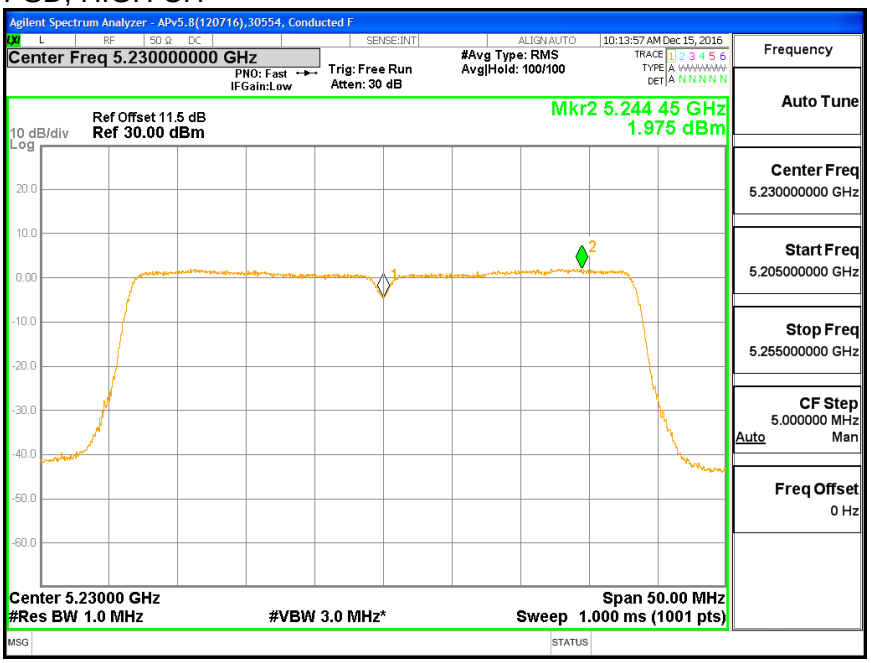

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.6. 802.11n HT40 ANTENNA B MODE IN THE 5.2 GHz BAND

8.6.1. 26 dB BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5190	40.240
High	5230	40.480

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

26 dB BANDWIDTH

BANDWIDTH, LOW CH

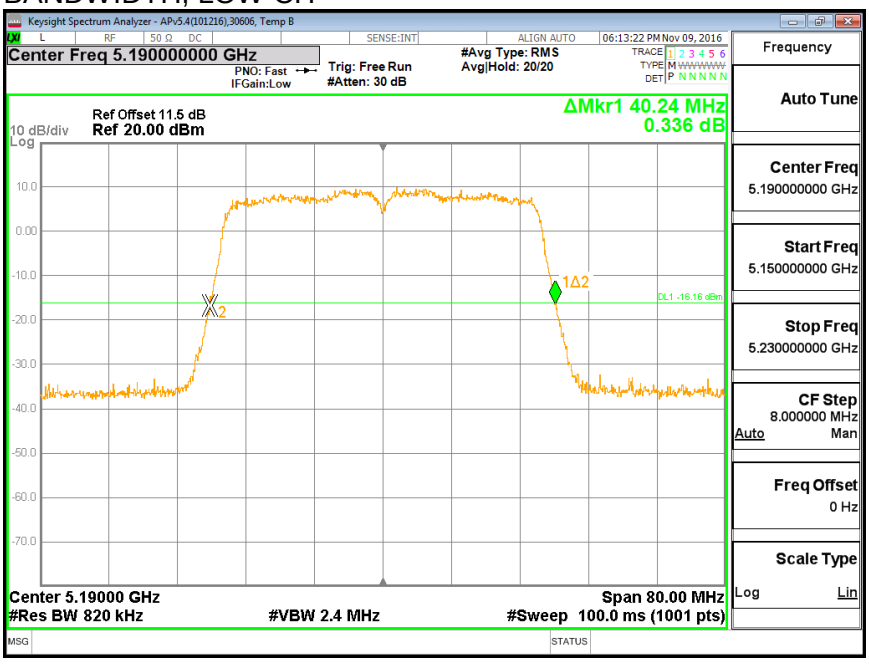

BANDWIDTH, HIGH CH

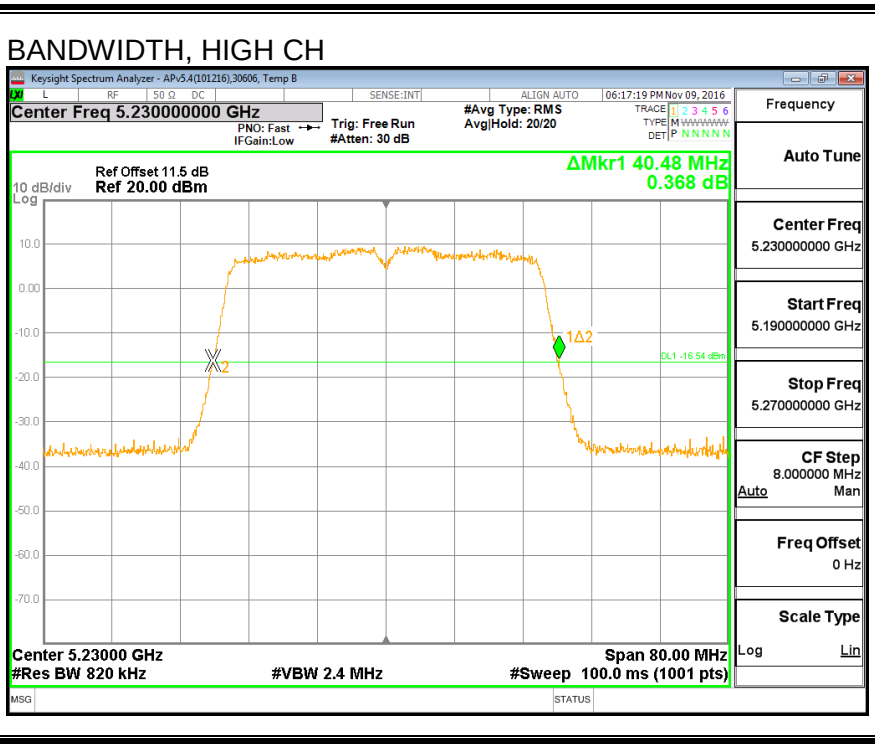

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.6.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5190	35.886
High	5230	36.266

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

99% BANDWIDTH

99% BANDWIDTH, LOW CH

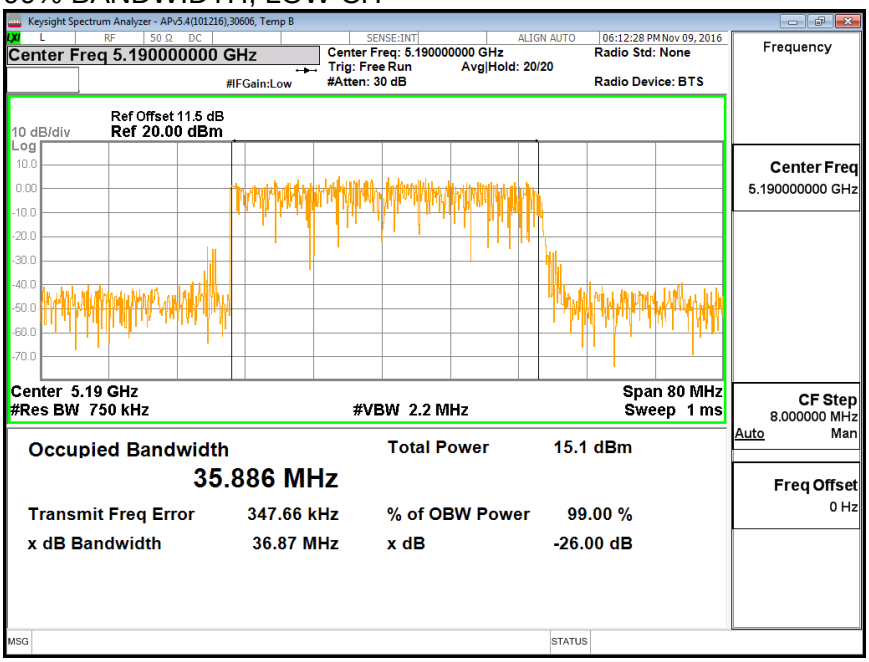

99% BANDWIDTH, HIGH CH

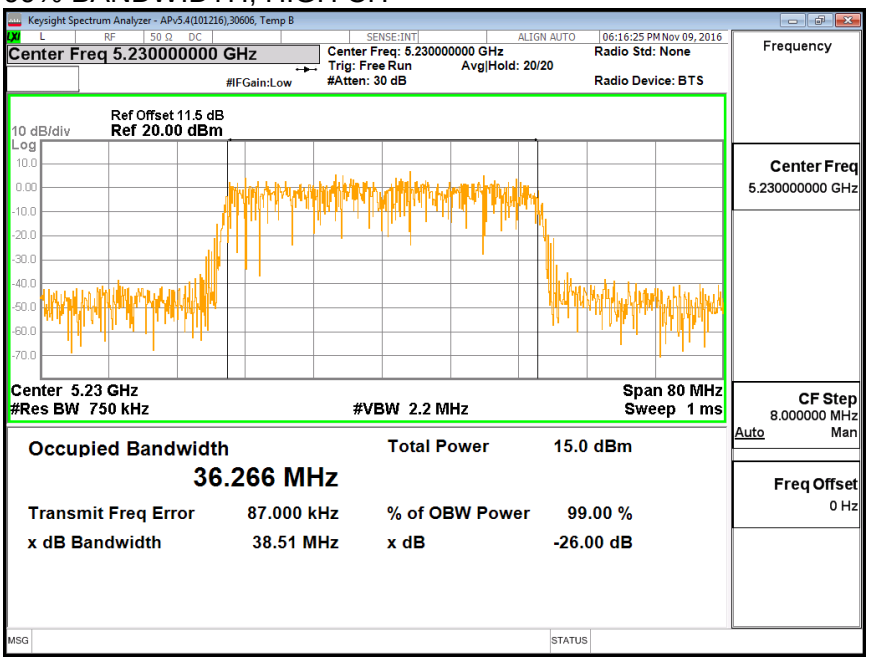

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.6.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	30554	Date:	12/15/16

Channel	Frequency (MHz)	Power (dBm)
Low	5190	14.39
High	5230	16.42

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.6.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

RESULTS

ID:	30554	Date:	12/15/16

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5190	2.64	2.64	24.00	11.00
High	5230	2.64	2.64	24.00	11.00

Duty Cycle CF (dB)	0.10	Included in Calculations of Corr'd PSD

Output Power Results

Channel	Frequency (MHz)	Ant B Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	14.39	14.39	24.00	-9.61
High	5230	16.42	16.42	24.00	-7.58

PSD Results

Channel	Frequency (MHz)	Ant B Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5190	0.339	0.44	11.00	-10.56
High	5230	2.080	2.18	11.00	-8.82

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

PSD

PSD, LOW CH

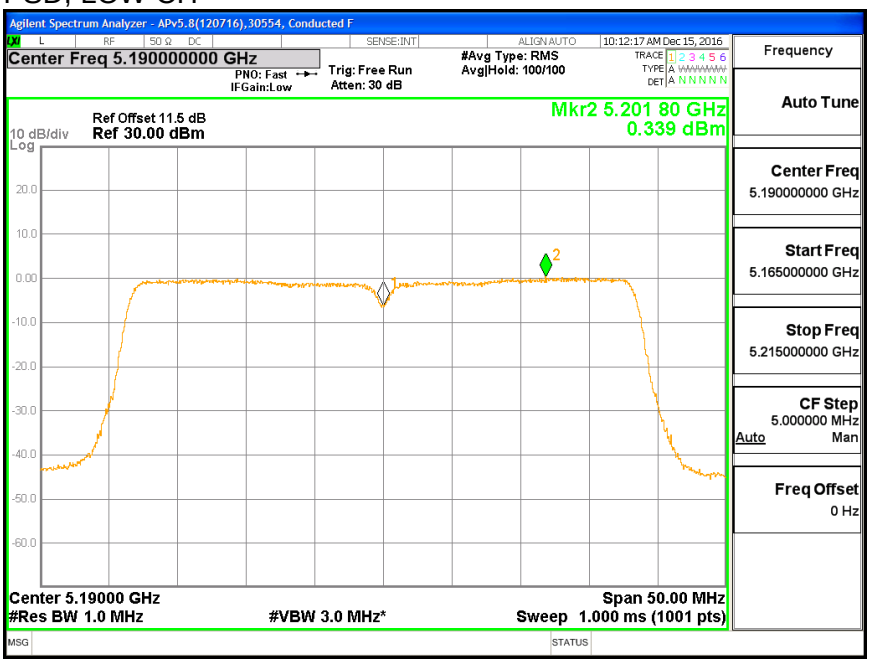

PSD, HIGH CH

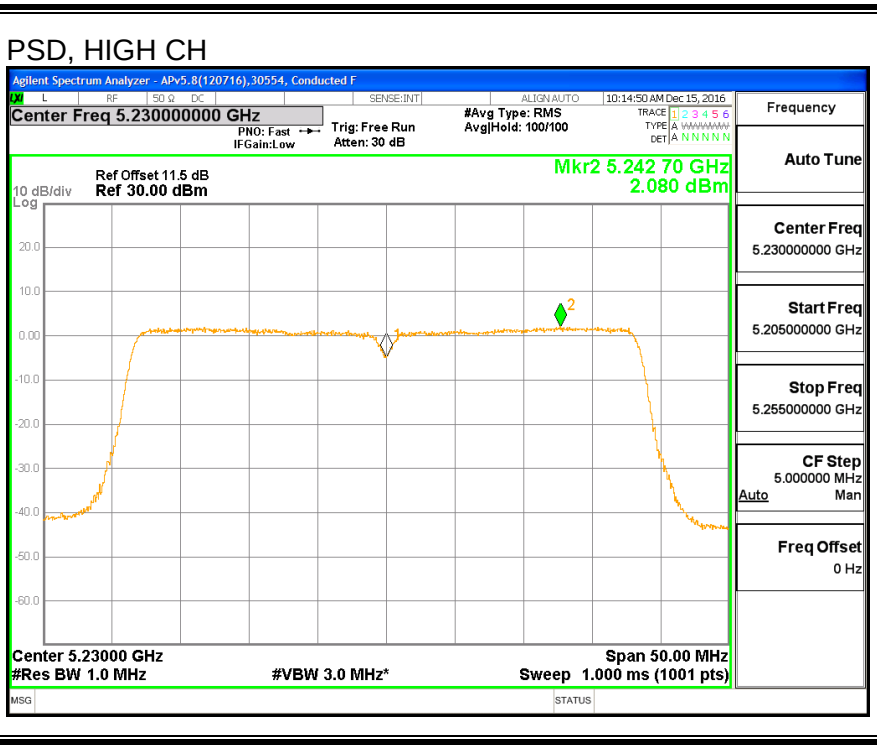

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.7. 802.11n HT40 2Tx (ANTENNA A + ANTENNA B) CDD MODE IN THE 5.2 GHz BAND

8.7.1. 26 dB BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB BW Ant A (MHz)	26 dB BW Ant B (MHz)
Low	5190	40.560	40.240
High	5230	40.640	40.160

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

26 DB BANDWIDTH, ANTENNA A

26 dB BANDWIDTH, LOW CH

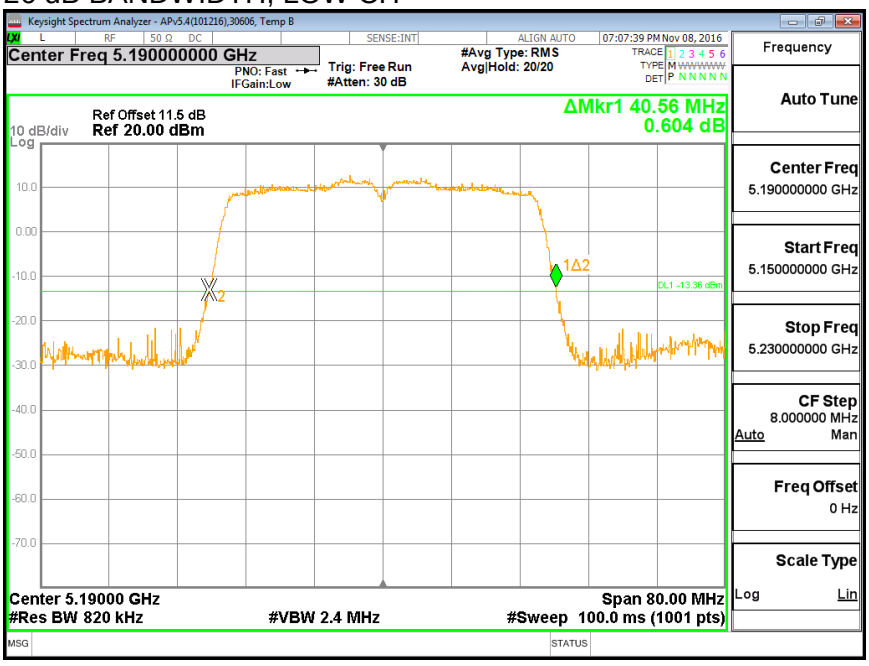

26 dB BANDWIDTH, HIGH CH

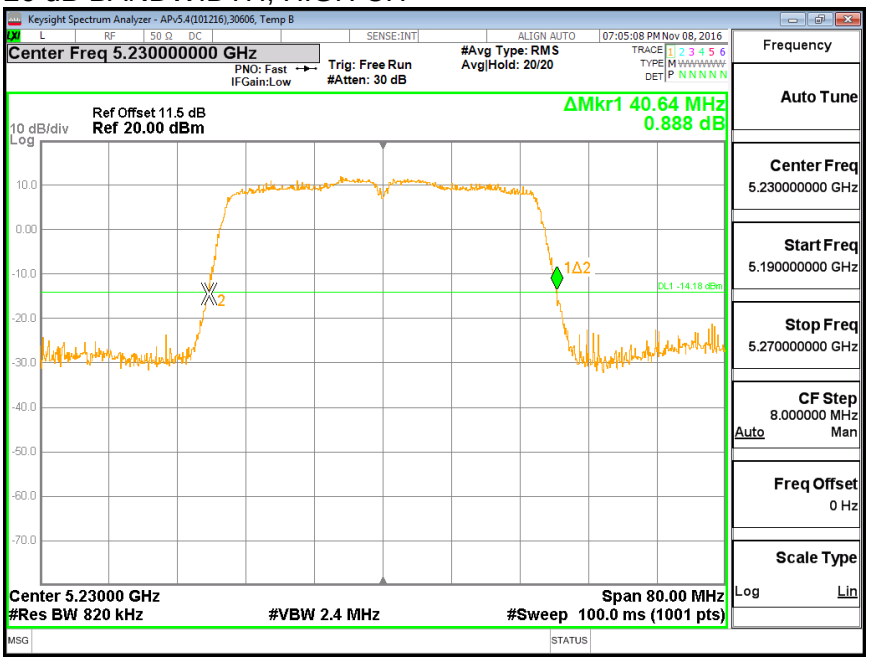

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

26 DB BANDWIDTH, ANTENNA B

26 dB BANDWIDTH, LOW CH

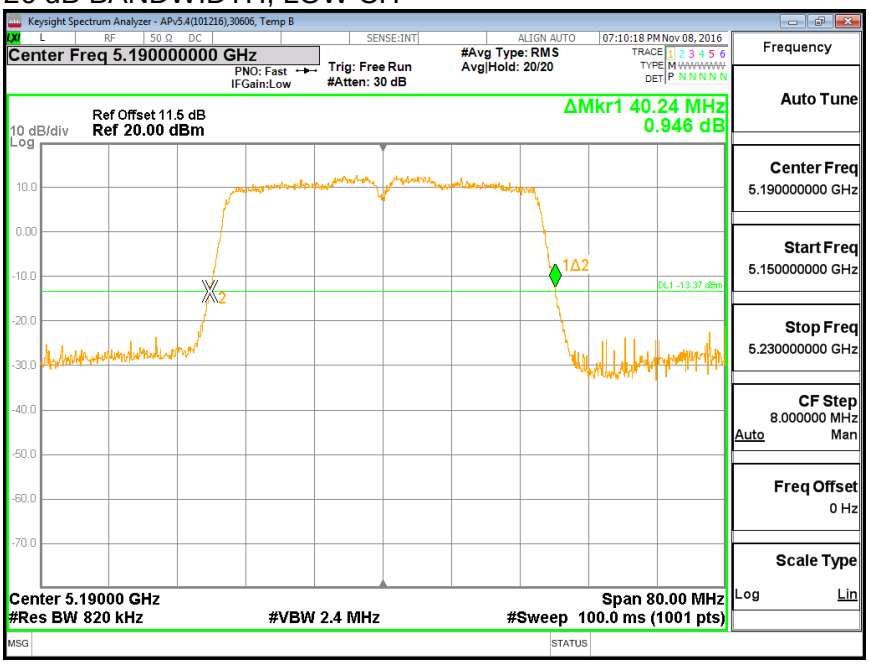

26 dB BANDWIDTH, HIGH CH

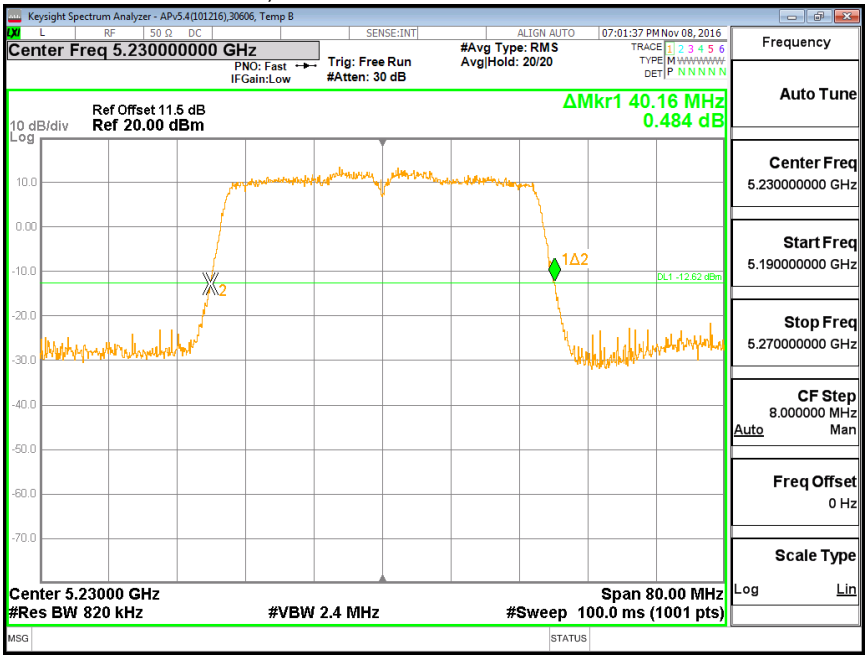

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.7.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% BW Ant A (MHz)	99% BW Ant B (MHz)
Low	5190	36.324	36.201
High	5230	36.362	36.011

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

99% BANDWIDTH, ANTENNA A

99% BANDWIDTH, LOW CH

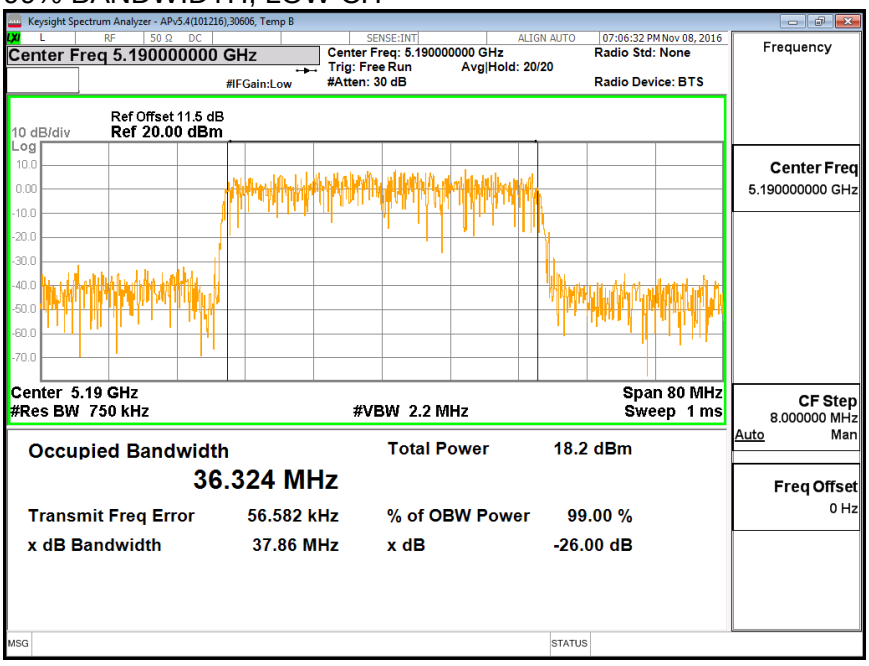

99% BANDWIDTH, HIGH CH

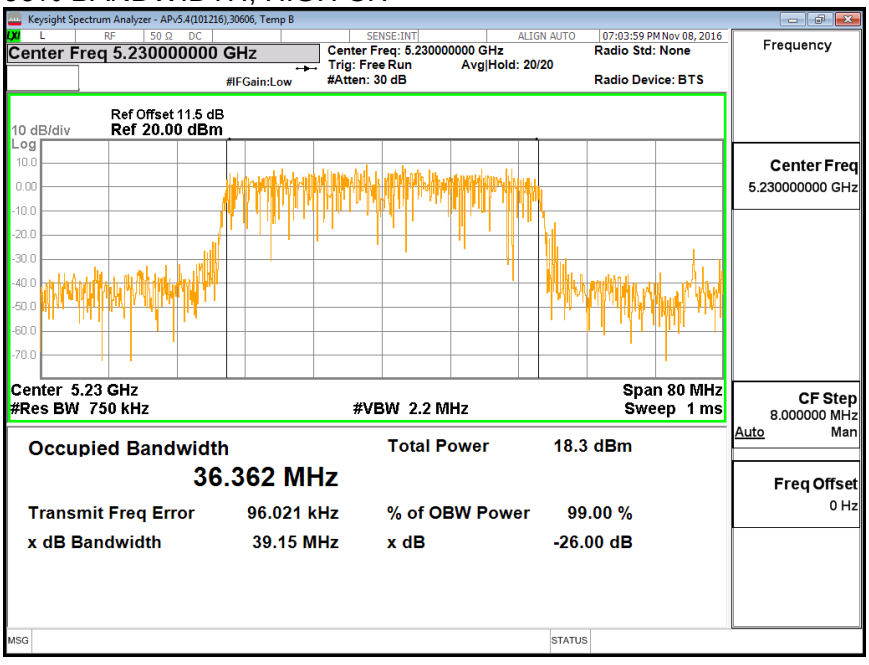

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

99% BANDWIDTH, ANTENNA B

99% BANDWIDTH, LOW CH

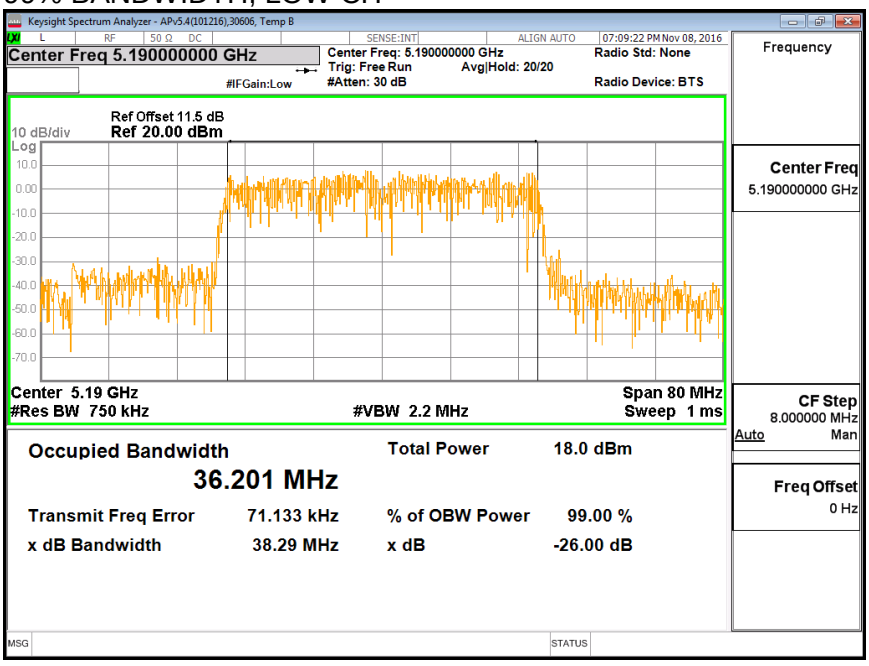

99% BANDWIDTH, HIGH CH

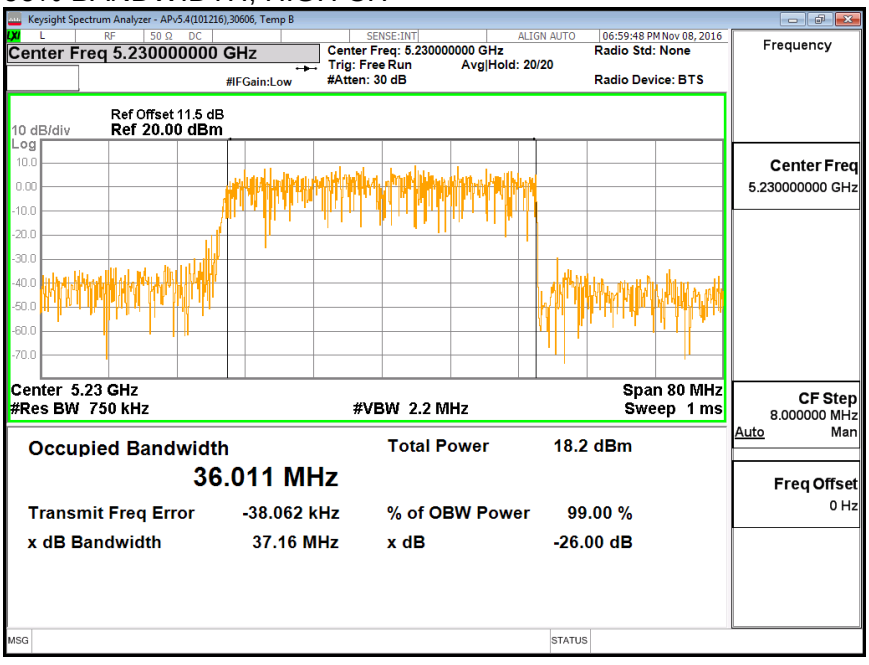

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.7.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	39316	Date:	12/15/16

Average Power Results

Channel	Frequency (MHz)	Ant A Power (dBm)	Ant B Power (dBm)	Total Power (dBm)
Low	5190	13.32	13.50	16.42
High	5230	16.39	16.38	19.40

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.7.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Ant A Antenna Gain (dBi)	Ant B Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
1.27	2.64	2.01

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

Ant A Antenna Gain (dBi)	Ant B Antenna Gain (dBi)	Correlated Chains Directional Gain (dBi)
1.27	2.64	4.99

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

RESULTS

ID:	39316	Date:	12/15/16

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5190	2.01	4.99	24.00	11.00
High	5230	2.01	4.99	24.00	11.00

Duty Cycle CF (dB)	0.10	Included in Calculations of Corr'd PSD

Output Power Results

Channel	Frequency (MHz)	Ant A Meas Power (dBm)	Ant B Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	13.32	13.50	16.42	24.00	-7.58
High	5230	16.39	16.38	19.40	24.00	-4.60

PSD Results

Channel	Frequency (MHz)	Ant A Meas PSD (dBm)	Ant B Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5190	0.13	-0.10	3.13	11.00	-7.87
High	5230	2.71	2.66	5.80	11.00	-5.20

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701J
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

PSD, ANTENNA A

PSD, LOW CH

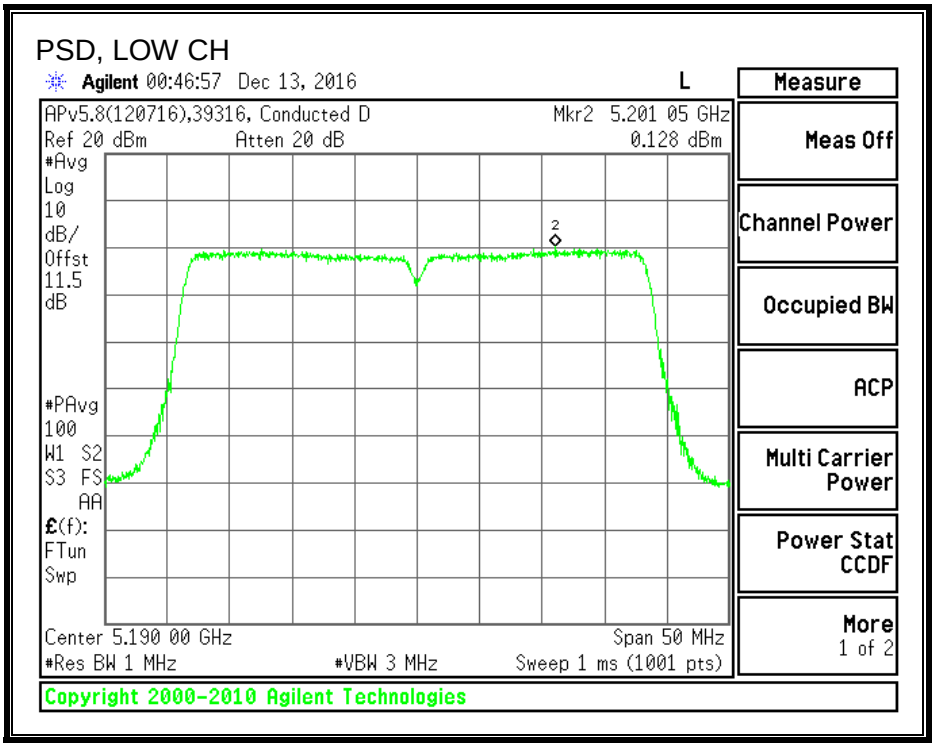

PSD, HIGH CH

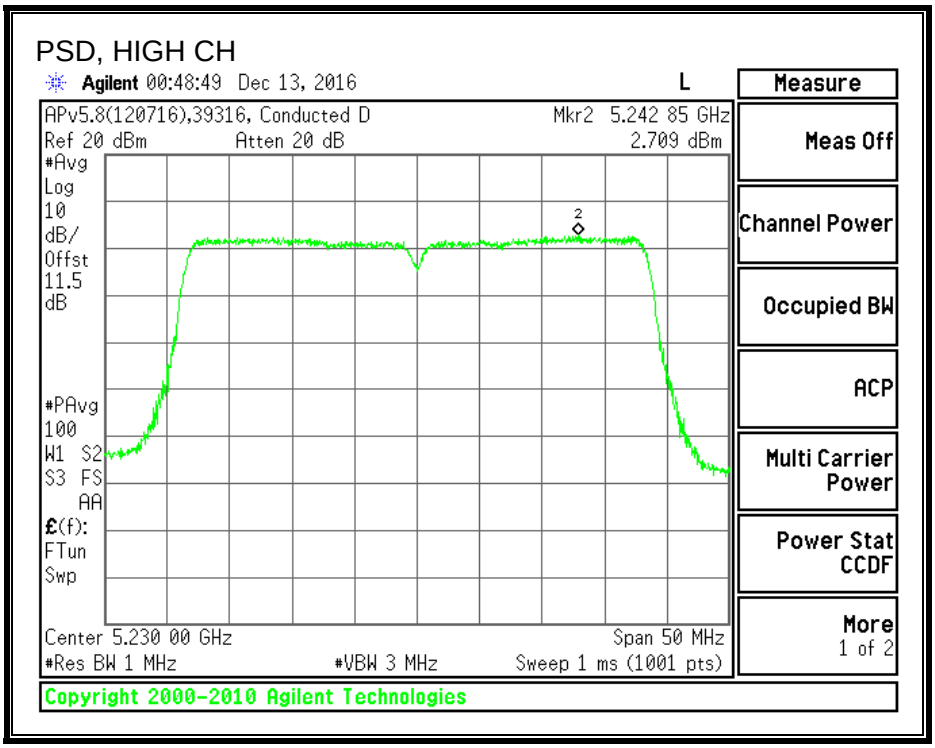

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

PSD, ANTENNA B

PSD, LOW CH

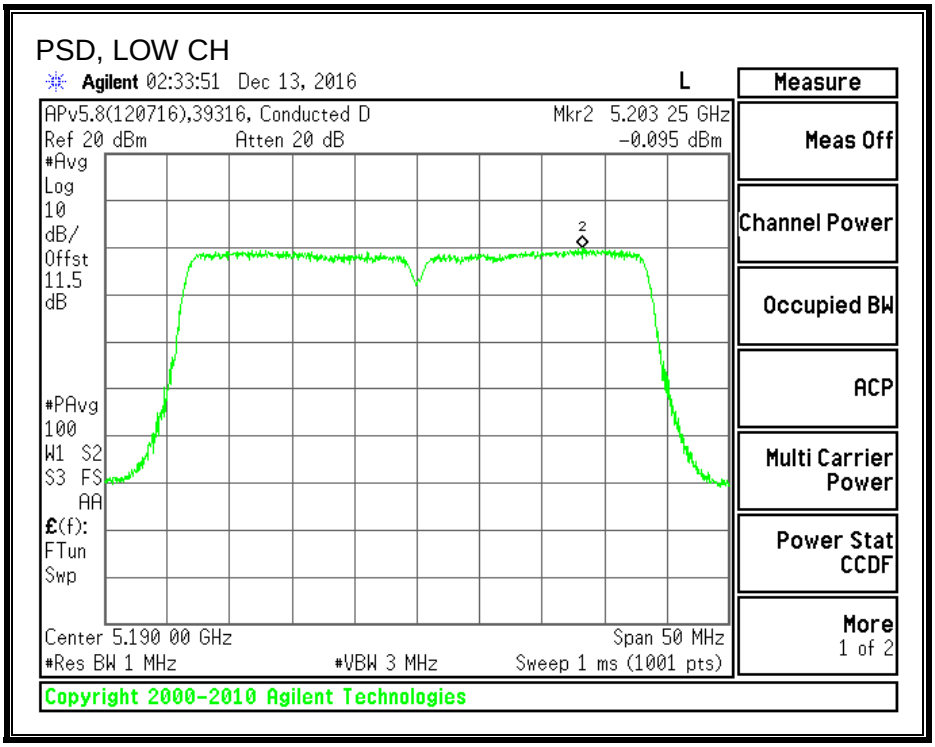

PSD, HIGH CH

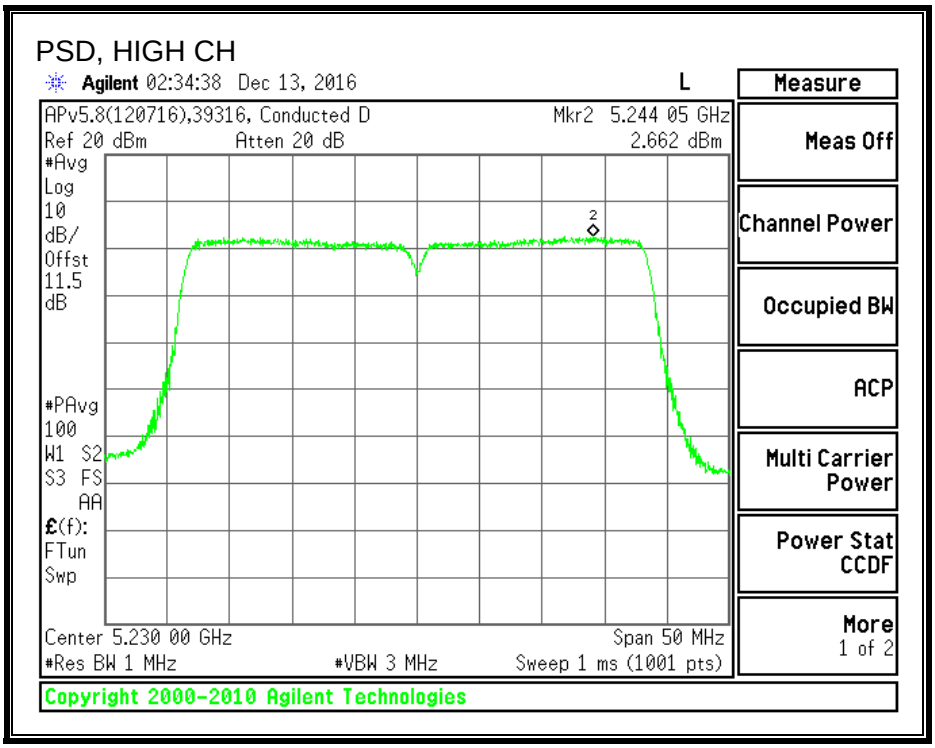

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.8. 802.11n HT40 2Tx (ANTENNA A + ANTENNA B) STBC MODE IN THE 5.2 GHz BAND

Noted: Covered by 802.11n HT40 2Tx (ANTENNA A + ANTENNA B) CDD MODE IN THE 5.2 GHz BAND

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.9. 802.11ac VHT80 ANTENNA A MODE IN THE 5.2 GHz BAND

8.9.1. 26 dB BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Mid	5210	82.720

26 dB BANDWIDTH

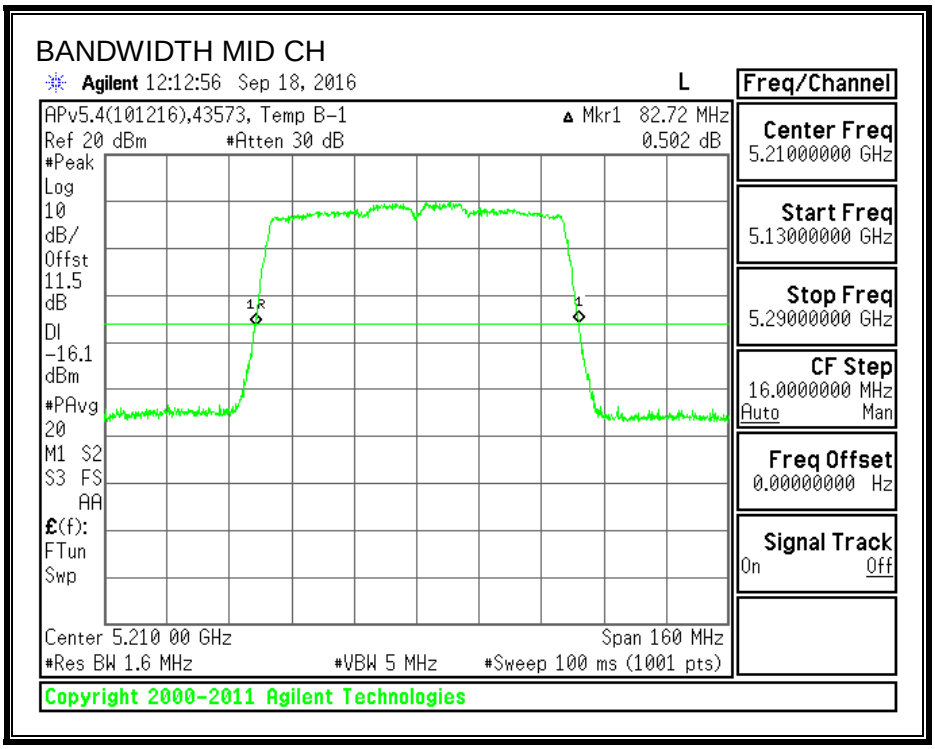

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.9.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Mid	5210	75.681

99% BANDWIDTH

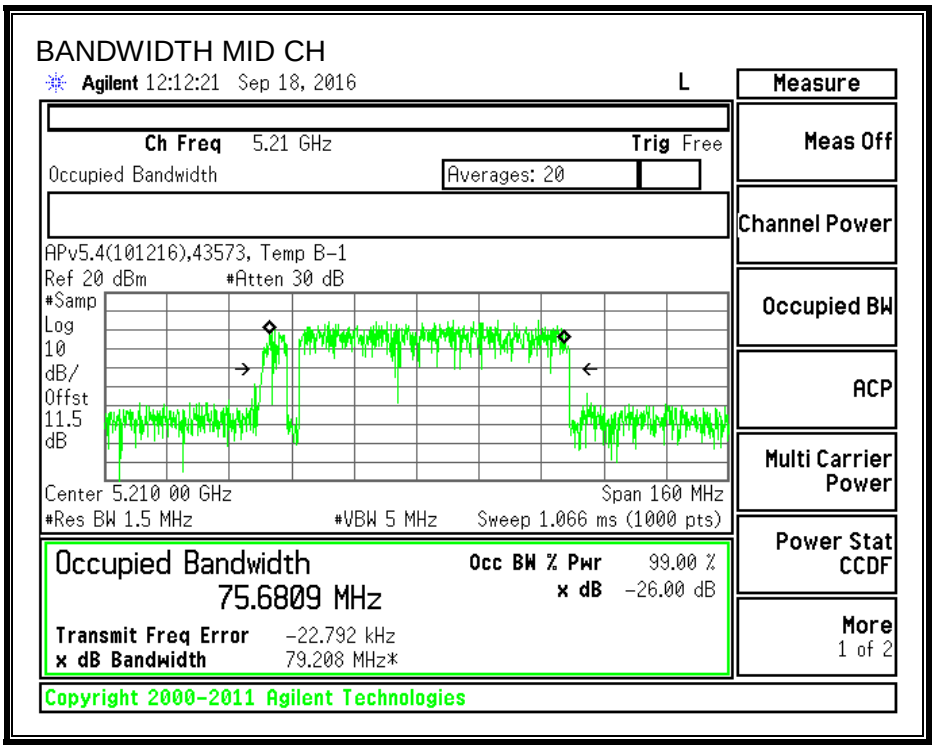

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.9.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	30554	Date:	12/15/16

Channel	Frequency (MHz)	Power (dBm)
Mid	5210	13.94

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.