



SAR EVALUATION REPORT

Applicant Name:
Apple, Inc.
One Apple Park Way
Cupertino, CA 95014

Date of Testing:
09/06/18 – 09/21/18
Test Site/Location:
PCTEST Lab, Morgan Hill, CA, USA
Document Serial No.:
1C1806050011-01-R2.BCG

FCC ID: BCGA2014
APPLICANT: APPLE, INC.

DUT Type: Tablet Device
Application Type: Certification
FCC Rule Part(s): CFR §2.1093
Model: A2014

Equipment Class	Band & Mode	Tx Frequency	SAR
			1g Body (W/kg)
PCB	UMTS 850	826.40 - 846.60 MHz	0.95
PCB	UMTS 1755	1712.4 - 1752.6 MHz	1.19
PCB	UMTS 1900	1852.4 - 1907.6 MHz	1.19
PCB	GPRS/EDGE 850	824.20 - 848.80 MHz	0.76
PCB	GPRS/EDGE 1900	1850.20 - 1909.80 MHz	0.79
PCB	LTE Band 71	665.5 - 695.5 MHz	1.06
PCB	LTE Band 12	699.7 - 715.3 MHz	1.12
PCB	LTE Band 17	706.5 - 713.5 MHz	N/A
PCB	LTE Band 13	773.5 - 784.5 MHz	1.14
PCB	LTE Band 14	790.5 - 795.5 MHz	0.97
PCB	LTE Band 5 (Cell)	824.7 - 848.3 MHz	1.02
PCB	LTE Band 26 (Cell)	814.7 - 848.3 MHz	1.14
PCB	LTE Band 66 (AWS)	1710.7 - 1779.3 MHz	1.17
PCB	LTE Band 4 (AWS)	1710.7 - 1754.3 MHz	1.03
PCB	LTE Band 25 (PCS)	1850.7 - 1914.3 MHz	1.19
PCB	LTE Band 2 (PCS)	1850.7 - 1909.3 MHz	N/A
PCB	LTE Band 30	2307.5 - 2312.5 MHz	1.17
PCB	LTE Band 7	2502.5 - 2567.5 MHz	1.19
PCB	LTE Band 41	2498.5 - 2687.5 MHz	1.19
DTSS	2.4 GHz WLAN	2412 - 2472 MHz	1.16
NII	U-NII-1	5180 - 5240 MHz	0.84
NII	U-NII-2A	5260 - 5320 MHz	1.02
NII	U-NII-2C	5500 - 5720 MHz	1.16
NII	U-NII-3	5745 - 5825 MHz	1.18
DSS/DTSS	Bluetooth	2402 - 2480 MHz	1.17
Simultaneous SAR per KDB 690783 D01v01r03:			1.59

This revised Test Report (S/N: 1C1806050011-01-R2.BCG) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

This wireless portable device has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in ANSI/IEEE C95.1-1992 and has been tested in accordance with the measurement procedures specified in Section 1.7 of this report; for North American frequency bands only.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them. Test results reported herein relate only to the item(s) tested.


Randy Ortanez
President



The SAR Tick is an initiative of the Mobile & Wireless Forum (MWF). While a product may be considered eligible, use of the SAR Tick logo requires an agreement with the MWF. Further details can be obtained by emailing: sartick@mwfai.info.

FCC ID: BCGA2014		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 1 of 195

T A B L E O F C O N T E N T S

1	DEVICE UNDER TEST	3
2	LTE INFORMATION	19
3	INTRODUCTION	20
4	DOSIMETRIC ASSESSMENT	21
5	TEST CONFIGURATION POSITIONS.....	22
6	RF EXPOSURE LIMITS	23
7	FCC MEASUREMENT PROCEDURES.....	24
8	RF CONDUCTED POWERS.....	30
9	SYSTEM VERIFICATION.....	134
10	SAR DATA SUMMARY	136
11	FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS.....	162
12	SAR MEASUREMENT VARIABILITY	186
13	ADDITIONAL TESTING PER FCC GUIDANCE	187
14	EQUIPMENT LIST.....	191
15	MEASUREMENT UNCERTAINTIES.....	192
16	CONCLUSION.....	193
17	REFERENCES	194
APPENDIX A: SAR TEST PLOTS		
APPENDIX B: SAR DIPOLE VERIFICATION PLOTS		
APPENDIX C: PROBE AND DIPOLE CALIBRATION CERTIFICATES		
APPENDIX D: SAR TISSUE SPECIFICATIONS		
APPENDIX E: SAR SYSTEM VALIDATION		
APPENDIX F: DUT ANTENNA DIAGRAM & SAR TEST SETUP PHOTOGRAPHS		
APPENDIX G: POWER REDUCTION VERIFICATION		
APPENDIX H: DLCA POWER MEASUREMENTS		

FCC ID: BCGA2014	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 2 of 195

1 DEVICE UNDER TEST

1.1 Device Overview

Band & Mode	Operating Modes	Tx Frequency
GPRS/EDGE 850	Data	824.20 - 848.80 MHz
GPRS/EDGE 1900	Data	1850.20 - 1909.80 MHz
UMTS 850	Data	826.40 - 846.60 MHz
UMTS 1750	Data	1712.4 - 1752.6 MHz
UMTS 1900	Data	1852.4 - 1907.6 MHz
LTE Band 71	Data	665.5 - 695.5 MHz
LTE Band 12	Data	699.7 - 715.3 MHz
LTE Band 17	Data	706.5 - 713.5 MHz
LTE Band 13	Data	779.5 - 784.5 MHz
LTE Band 14	Data	790.5 - 795.5 MHz
LTE Band 5 (Cell)	Data	824.7 - 848.3 MHz
LTE Band 26 (Cell)	Data	814.7 - 848.3 MHz
LTE Band 66 (AWS)	Data	1710.7 - 1779.3 MHz
LTE Band 4 (AWS)	Data	1710.7 - 1754.3 MHz
LTE Band 25 (PCS)	Data	1850.7 - 1914.3 MHz
LTE Band 2 (PCS)	Data	1850.7 - 1909.3 MHz
LTE Band 30	Data	2307.5 - 2312.5 MHz
LTE Band 7	Data	2502.5 - 2567.5 MHz
LTE Band 41	Data	2498.5 - 2687.5 MHz
2.4 GHz WLAN	Voice/Data	2412 - 2472 MHz
U-NII-1	Voice/Data	5180 - 5240 MHz
U-NII-2A	Voice/Data	5260 - 5320 MHz
U-NII-2C	Voice/Data	5500 - 5720 MHz
U-NII-3	Voice/Data	5745 - 5825 MHz
Bluetooth	Data	2402 - 2480 MHz

1.2 Power Reduction for SAR

This device uses the manufacturer's proprietary motion detect mode to determine proximity to the user's body and set the licensed power level accordingly for SAR compliance. When being used in the hand or the body, the output power for licensed transmitters will always be reduced. Per FCC KDB Guidance, SAR testing was performed only using reduced output powers following the test positions in KDB Publication 616217.

This device additionally utilizes a power reduction mechanism for Bluetooth and WLAN operations. When WLAN/Bluetooth is operating simultaneously with certain combinations of 2G/3G/4G and 5 GHz WLAN antennas, the output power of is permanently reduced. SAR evaluations were additionally performed at the maximum allowed output power for these scenarios to evaluate simultaneous transmission compliance.

Detailed descriptions of the power reduction mechanisms are included in the operational description. The power reduction mechanisms were confirmed during the SAR Evaluation. Appendix G contains a summary of the verification results.

FCC ID: BCGA2014	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 3 of 195

1.3 Nominal and Maximum Output Power Specifications

This device operates using the following maximum and nominal output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v06.

1.3.1 2G/3G/4G Output Power for Portable Use Conditions

A. Antenna 1

Mode / Band		Burst Average GMSK (dBm)		Burst Average 8-PSK (dBm)	
		1 TX Slots	2 TX Slots	1 TX Slots	2 TX Slots
GPRS/EDGE 850	Maximum	27.50	26.50	22.00	21.00
	Nominal	26.75	25.75	21.25	20.25
Mode / Band		Modulated Average (dBm)			
		3GPP WCDMA	3GPP HSDPA	3GPP HSUPA	3GPP DC-HSDPA
UMTS Band 5 (850 MHz)	Maximum	20.80	20.80	20.80	20.80
	Nominal	20.30	20.30	20.30	20.30

Mode / Band		Modulated Average (dBm)
LTE Band 71	Maximum	23.10
	Nominal	22.60
LTE Band 12	Maximum	19.70
	Nominal	19.20
LTE Band 17	Maximum	19.70
	Nominal	19.20
LTE Band 13	Maximum	23.60
	Nominal	23.10
LTE Band 14	Maximum	23.60
	Nominal	23.10
LTE Band 5 (Cell)	Maximum	20.80
	Nominal	20.30
LTE Band 26 (Cell)	Maximum	20.80
	Nominal	20.30

FCC ID: BCGA2014	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 4 of 195

B. Antenna 3

Mode / Band		Burst Average GMSK (dBm)		Burst Average 8-PSK (dBm)	
		1 TX Slots	2 TX Slots	1 TX Slots	2 TX Slots
GPRS/EDGE 850	Maximum	30.25	27.20	24.75	23.75
	Nominal	29.50	26.45	24.00	23.00
Mode / Band		Modulated Average (dBm)			
		3GPP WCDMA	3GPP HSDPA	3GPP HSUPA	3GPP DC-HSDPA
UMTS Band 5 (850 MHz)	Maximum	21.40	21.40	21.40	21.40
	Nominal	20.90	20.90	20.90	20.90

Mode / Band		Modulated Average (dBm)
LTE Band 71	Maximum	23.10
	Nominal	22.60
LTE Band 12	Maximum	21.70
	Nominal	21.20
LTE Band 17	Maximum	21.70
	Nominal	21.20
LTE Band 13	Maximum	22.20
	Nominal	21.70
LTE Band 14	Maximum	22.20
	Nominal	21.70
LTE Band 5 (Cell)	Maximum	21.40
	Nominal	20.90
LTE Band 26 (Cell)	Maximum	21.40
	Nominal	20.90

FCC ID: BCGA2014	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 5 of 195

C. Antenna 4A

Mode / Band		Burst Average GMSK (dBm)		Burst Average 8-PSK (dBm)	
		1 TX Slots	2 TX Slots	1 TX Slots	2 TX Slots
GPRS/EDGE 1900	Maximum	22.90	19.90	22.90	19.90
	Nominal	22.15	19.15	22.15	19.15
Mode / Band		Modulated Average (dBm)			
		3GPP WCDMA	3GPP HSDPA	3GPP HSUPA	3GPP DC-HSDPA
UMTS Band 4 (1750 MHz)	Maximum	15.00	15.00	15.00	15.00
	Nominal	14.50	14.50	14.50	14.50
UMTS Band 2 (1900 MHz)	Maximum	15.40	15.40	15.40	15.40
	Nominal	14.90	14.90	14.90	14.90

Mode / Band		Modulated Average (dBm)
LTE Band 66 (AWS)	Maximum	15.00
	Nominal	14.50
LTE Band 4 (AWS)	Maximum	15.00
	Nominal	14.50
LTE Band 25 (PCS)	Maximum	15.40
	Nominal	14.90
LTE Band 2 (PCS)	Maximum	15.40
	Nominal	14.90
LTE Band 30	Maximum	14.10
	Nominal	13.60
LTE Band 7	Maximum	14.30
	Nominal	13.80
LTE Band 7 ULCA	Maximum	14.30
	Nominal	13.30
LTE Band 41 PC3	Maximum	17.30
	Nominal	16.80
LTE Band 41 PC3 ULCA	Maximum	17.30
	Nominal	16.30
LTE Band 41 PC2	Maximum	17.30
	Nominal	16.80

FCC ID: BCGA2014	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 6 of 195

D. Antenna 4B

Mode / Band		Burst Average GMSK (dBm)		Burst Average 8-PSK (dBm)	
		1 TX Slots	2 TX Slots	1 TX Slots	2 TX Slots
GPRS/EDGE 1900	Maximum	23.40	20.40	23.40	20.40
	Nominal	22.65	19.65	22.65	19.65
Mode / Band		Modulated Average (dBm)			
		3GPP WCDMA	3GPP HSDPA	3GPP HSUPA	3GPP DC-HSDPA
UMTS Band 4 (1750 MHz)	Maximum	15.00	15.00	15.00	15.00
	Nominal	14.50	14.50	14.50	14.50
UMTS Band 2 (1900 MHz)	Maximum	14.50	14.50	14.50	14.50
	Nominal	14.00	14.00	14.00	14.00

Mode / Band		Modulated Average (dBm)
LTE Band 66 (AWS)	Maximum	15.00
	Nominal	14.50
LTE Band 4 (AWS)	Maximum	15.00
	Nominal	14.50
LTE Band 25 (PCS)	Maximum	14.50
	Nominal	14.00
LTE Band 2 (PCS)	Maximum	14.50
	Nominal	14.00
LTE Band 30	Maximum	13.50
	Nominal	13.00
LTE Band 7	Maximum	12.30
	Nominal	11.80
LTE Band 7 ULCA	Maximum	12.30
	Nominal	11.30
LTE Band 41 PC3	Maximum	16.20
	Nominal	15.70
LTE Band 41 PC3 ULCA	Maximum	16.20
	Nominal	15.20
LTE Band 41 PC2	Maximum	16.20
	Nominal	15.70

FCC ID: BCGA2014	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 7 of 195

E. Antenna 2A

Mode / Band		Burst Average GMSK (dBm)		Burst Average 8-PSK (dBm)	
		1 TX Slots	2 TX Slots	1 TX Slots	2 TX Slots
GPRS/EDGE 1900	Maximum	23.10	20.10	21.75	20.10
	Nominal	22.35	19.35	21.00	19.35

Mode / Band		Modulated Average (dBm)			
		3GPP WCDMA	3GPP HSDPA	3GPP HSUPA	3GPP DC-HSDPA
UMTS Band 4 (1750 MHz)	Maximum	15.00	15.00	15.00	15.00
	Nominal	14.50	14.50	14.50	14.50
UMTS Band 2 (1900 MHz)	Maximum	15.40	15.40	15.40	15.40
	Nominal	14.90	14.90	14.90	14.90

Mode / Band		Modulated Average (dBm)
LTE Band 66 (AWS)	Maximum	14.75
	Nominal	14.25
LTE Band 4 (AWS)	Maximum	15.00
	Nominal	14.50
LTE Band 25 (PCS)	Maximum	15.40
	Nominal	14.90
LTE Band 2 (PCS)	Maximum	15.40
	Nominal	14.90
LTE Band 30	Maximum	13.30
	Nominal	12.80
LTE Band 7	Maximum	14.10
	Nominal	13.60
LTE Band 7 ULCA	Maximum	14.10
	Nominal	13.10
LTE Band 41 PC3	Maximum	17.50
	Nominal	17.00
LTE Band 41 PC3 ULCA	Maximum	17.50
	Nominal	16.50
LTE Band 41 PC2	Maximum	17.50
	Nominal	17.00

FCC ID: BCGA2014	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 8 of 195

F. Antenna 2B

Mode / Band		Burst Average GMSK (dBm)		Burst Average 8-PSK (dBm)	
		1 TX Slots	2 TX Slots	1 TX Slots	2 TX Slots
GPRS/EDGE 1900	Maximum	23.00	20.00	21.75	20.00
	Nominal	22.25	19.25	21.00	19.25
Mode / Band		Modulated Average (dBm)			
		3GPP WCDMA	3GPP HSDPA	3GPP HSUPA	3GPP DC-HSDPA
UMTS Band 4 (1750 MHz)	Maximum	15.00	15.00	15.00	15.00
	Nominal	14.50	14.50	14.50	14.50
UMTS Band 2 (1900 MHz)	Maximum	15.30	15.30	15.30	15.30
	Nominal	14.80	14.80	14.80	14.80
Mode / Band		Modulated Average (dBm)			
LTE Band 66 (AWS)	Maximum	15.00			
	Nominal	14.50			
LTE Band 4 (AWS)	Maximum	15.00			
	Nominal	14.50			
LTE Band 25 (PCS)	Maximum	15.30			
	Nominal	14.80			
LTE Band 2 (PCS)	Maximum	15.30			
	Nominal	14.80			
LTE Band 30	Maximum	14.20			
	Nominal	13.70			
LTE Band 7	Maximum	13.00			
	Nominal	12.50			
LTE Band 7 ULCA	Maximum	13.00			
	Nominal	12.00			
LTE Band 41 PC3	Maximum	15.60			
	Nominal	15.10			
LTE Band 41 PC3 ULCA	Maximum	15.60			
	Nominal	14.60			
LTE Band 41 PC2	Maximum	15.60			
	Nominal	15.10			

FCC ID: BCGA2014	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 9 of 195

1.3.2 Unlicensed Maximum Output Power

A. Antenna 4A

Mode / Band		Modulated Average (dBm)			
Bluetooth BDR/LE	Maximum	14.75			
Bluetooth EDR	Maximum	13.00			
Bluetooth HDR	Maximum	8.50			
Mode / Band		Modulated Average (dBm)			
		Ch. 1 - 10	Ch. 11	Ch. 12	Ch. 13
IEEE 802.11b (2.4 GHz)	Maximum	13.75			12.00
	Nominal	12.25			10.50
IEEE 802.11g (2.4 GHz)	Maximum	13.75	13.50	10.50	0.00
	Nominal	12.25	12.00	9.00	-1.50
IEEE 802.11n (2.4 GHz)	Maximum	13.75	13.50	10.50	0.00
	Nominal	12.25	12.00	9.00	-1.50
Mode / Band		Modulated Average - MIMO (dBm)			
		Ch. 1 - 10	Ch. 11	Ch. 12	Ch. 13
IEEE 802.11g/n (2.4 GHz)	Maximum	13.75	13.50	10.50	0.00
	Nominal	12.25	12.00	9.00	-1.50

Note: In MIMO operations, Antenna 4A transmits at maximum allowed powers as indicated above.

B. Antenna 2A

Mode / Band		Modulated Average (dBm)				
Bluetooth BDR/LE	Maximum	14.75				
Bluetooth EDR	Maximum	11.00				
Bluetooth HDR	Maximum	6.00				
Mode / Band		Modulated Average (dBm)				
		Ch. 1, 11	Ch. 2-10	Ch. 12	Ch. 13	
IEEE 802.11b (2.4 GHz)	Maximum	14.25			12.00	
	Nominal	12.75			10.50	
IEEE 802.11g (2.4 GHz)	Maximum	14.00	14.25	10.50	0.00	
	Nominal	12.50	12.75	9.00	-1.50	
IEEE 802.11n (2.4 GHz)	Maximum	14.00	14.25	10.50	0.00	
	Nominal	12.50	12.75	9.00	-1.50	
Mode / Band		Modulated Average - MIMO (dBm)				
		Ch. 1	Ch. 2-10	Ch. 11	Ch. 12	Ch. 13
IEEE 802.11g/n (2.4 GHz)	Maximum	14.00	14.25	13.50	8.50	-1.50
	Nominal	12.50	12.75	12.00	7.00	-3.00

Note: In MIMO operations, Antenna 2A transmits at maximum allowed powers as indicated above.

FCC ID: BCGA2014	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 10 of 195

C. Antenna 5

Mode / Band		Modulated Average (dBm)			
Bluetooth BDR/LE	Maximum	17.50			
Bluetooth EDR	Maximum	11.50			
Bluetooth HDR	Maximum	6.50			
Mode / Band		Modulated Average (dBm)			
		Ch.1-10	Ch. 11	Ch. 12	Ch. 13
IEEE 802.11b (2.4 GHz)	Maximum	19.00			
	Nominal	17.50			
IEEE 802.11g (2.4 GHz)	Maximum	19.00	18.50	17.00	16.00
	Nominal	17.50	17.00	15.50	14.50
IEEE 802.11n (2.4 GHz)	Maximum	19.00	18.50	17.00	16.00
	Nominal	17.50	17.00	15.50	14.50
Mode / Band		Modulated Average - MIMO (dBm)			
		Ch. 1-10	Ch.11	Ch. 12	Ch. 13
IEEE 802.11g/n (2.4 GHz)	Maximum	19.00	17.50	8.50	-1.50
	Nominal	17.50	16.00	7.00	-3.00

Note: In MIMO operations, Antenna 5 transmits at maximum allowed powers as indicated above.

Mode / Band		Modulated Average (dBm)														
		20 MHz Bandwidth				40 MHz Bandwidth					80 MHz Bandwidth					
		Ch. 36-48, 100	Ch. 52-60	Ch. 64, 104-136, 144-165	Ch. 140	Ch. 38, 102	Ch. 46, 134	Ch. 54	Ch. 62	Ch. 110-126, 142-159	Ch. 42, 58	Ch.106	Ch. 122-155			
IEEE 802.11a (5 GHz)	Maximum	15.50	16.75	16.00	15.00											
	Nominal	14.00	15.25	14.50	13.50											
IEEE 802.11n (5 GHz)	Maximum	15.50	16.75	16.00	15.00	14.00	15.50	16.75	14.50	16.00						
	Nominal	14.00	15.25	14.50	13.50	12.50	14.00	15.25	13.00	14.50						
IEEE 802.11ac (5 GHz)	Maximum	15.50	16.75	16.00	15.00	14.00	15.50	16.75	14.50	16.00	13.50	13.00	16.00			
	Nominal	14.00	15.25	14.50	13.50	12.50	14.00	15.25	13.00	14.50	12.00	11.50	14.50			
Mode / Band		Modulated Average - MIMO (CDD/SDM) (dBm)														
		20 MHz Bandwidth						40 MHz Bandwidth					80 MHz Bandwidth			
		Ch. 36	Ch. 40-48	Ch. 52-60	Ch. 64	Ch. 100, 140	Ch. 104-136, 144-165	Ch. 38, 102	Ch. 46	Ch. 54	Ch. 62	Ch. 110-126, 142-159	Ch. 134	Ch. 42, 106	Ch. 58	Ch. 122-155
IEEE 802.11a (5 GHz)	Maximum	15.00	15.50	16.75	14.50	14.00	16.00									
	Nominal	13.50	14.00	15.25	13.00	12.50	14.50									
IEEE 802.11n (5 GHz)	Maximum	15.00	15.50	16.75	14.50	14.00	16.00	13.00	15.50	16.75	12.50	16.00	15.00			
	Nominal	13.50	14.00	15.25	13.00	12.50	14.50	11.50	14.00	15.25	11.00	14.50	13.50			
IEEE 802.11ac (5 GHz)	Maximum	15.00	15.50	16.75	14.50	14.00	16.00	13.00	15.50	16.75	12.50	16.00	15.00	11.50	11.00	16.00
	Nominal	13.50	14.00	15.25	13.00	12.50	14.50	11.50	14.00	15.25	11.00	14.50	13.50	10.00	9.50	14.50

Note: In MIMO operations, Antenna 5 transmits at maximum allowed powers as indicated above for both 2 Tx CDD and 2 Tx SDM.

FCC ID: BCGA2014	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 11 of 195

D. Antenna 6

Mode / Band		Modulated Average (dBm)															
		20 MHz Bandwidth						40 MHz Bandwidth						80 MHz Bandwidth			
		Ch. 36, 64	Ch. 40-48	Ch. 52-60	Ch. 100, 149-165	Ch. 140	Ch. 104-136, 144	Ch. 38, 102	Ch. 46	Ch. 54	Ch. 62	Ch. 110-126, 142	Ch. 134, 151-159	Ch. 42-58	Ch. 106	Ch. 122-138	Ch. 155
IEEE 802.11a (5 GHz)	Maximum	16.00	17.50	16.50	15.50	15.00	16.25										
	Nominal	14.50	16.00	15.00	14.00	13.50	14.75										
IEEE 802.11n (5 GHz)	Maximum	16.00	17.50	16.50	15.50	15.00	16.25	14.00	17.50	16.50	14.50	16.25	15.50				
	Nominal	14.50	16.00	15.00	14.00	13.50	14.75	12.50	16.00	15.00	13.00	14.75	14.00				
IEEE 802.11ac (5 GHz)	Maximum	16.00	17.50	16.50	15.50	15.00	16.25	14.00	17.50	16.50	14.50	16.25	15.50	13.50	13.00	16.25	15.50
	Nominal	14.50	16.00	15.00	14.00	13.50	14.75	12.50	16.00	15.00	13.00	14.75	14.00	12.00	11.50	14.75	14.00

Mode / Band		Modulated Average - MIMO (CDD/SDM) (dBm)															
		20 MHz Bandwidth						40 MHz Bandwidth						80 MHz Bandwidth			
		Ch. 36	Ch. 40-48	Ch. 52-60	Ch. 64	Ch. 100, 140	Ch. 104-136, 144	Ch. 149-165	Ch. 38, 102	Ch. 46	Ch. 54	Ch. 62	Ch. 110-126, 142	Ch. 134	Ch. 151-159	Ch. 42, 106	Ch. 58
IEEE 802.11a (5 GHz)	Maximum	15.00	17.50	16.50	14.50	14.00	16.25	15.50									
	Nominal	13.50	16.00	15.00	13.00	12.50	14.75	14.00									
IEEE 802.11n (5 GHz)	Maximum	15.00	17.50	16.50	14.50	14.00	16.25	15.50	13.00	17.50	16.50	12.50	16.25	15.00	15.50		
	Nominal	13.50	16.00	15.00	13.00	12.50	14.75	14.00	11.50	16.00	15.00	11.00	14.75	13.50	14.00		
IEEE 802.11ac (5 GHz)	Maximum	15.00	17.50	16.50	14.50	14.00	16.25	15.50	13.00	17.50	16.50	12.50	16.25	15.00	15.50	11.50	11.00
	Nominal	13.50	16.00	15.00	13.00	12.50	14.75	14.00	11.50	16.00	15.00	11.00	14.75	13.50	14.00	10.00	9.50

Note: In MIMO operations, Antenna 6 transmits at maximum allowed powers as indicated above for both 2 Tx CDD and 2 Tx SDM.

1.3.3 Unlicensed Reduced Output Power

A. Antenna 4A – Output Power for Simultaneous Operations with 2G/3G/4G Antennas 3/4A/4B

Mode / Band		Modulated Average (dBm)
Bluetooth BDR/LE	Maximum	7.75
Bluetooth EDR	Maximum	7.75
Bluetooth HDR	Maximum	7.75

The above power levels are implemented when 2G/3G/4G Operations are active with Antenna 3/4A/4B.

Mode / Band		Modulated Average (dBm)	
		Ch. 1 - 12	Ch. 13
IEEE 802.11b (2.4 GHz)	Maximum	6.75	
	Nominal	5.25	
IEEE 802.11g (2.4 GHz)	Maximum	6.75	0.00
	Nominal	5.25	-1.50
IEEE 802.11n (2.4 GHz)	Maximum	6.75	0.00
	Nominal	5.25	-1.50

Mode / Band		Modulated Average - MIMO (dBm)	
		Ch. 1-12	Ch. 13
IEEE 802.11g/n (2.4 GHz)	Maximum	6.75	0.00
	Nominal	5.25	-1.50

Note: In MIMO operations, Antenna 4A transmits at maximum allowed powers as indicated above.
The above power levels are implemented when 2G/3G/4G Operations are active with Antenna 4A/4B.

FCC ID: BCGA2014	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 12 of 195

B. Antenna 2A – Output Power for Simultaneous Operations with 2G/3G/4G Antennas 1/2A/2B

Mode / Band		Modulated Average (dBm)
Bluetooth BDR/LE Reduced Level 1	Maximum	12.50
Bluetooth EDR Reduced Level 1	Maximum	11.00
Bluetooth HDR Reduced Level 1	Maximum	6.00

The above power levels are implemented when 5 GHz WIFI is active only.

Mode / Band		Modulated Average (dBm)
Bluetooth BDR/LE Reduced Level 2	Maximum	7.75
Bluetooth EDR Reduced Level 2	Maximum	7.75
Bluetooth HDR Reduced Level 2	Maximum	6.00

The above power levels are implemented when 2G/3G/4G Operations are active with Antenna 1/2A/2B with/without 5 GHz WIFI.

Mode / Band		Modulated Average (dBm)	
		Ch. 1 - 12	Ch. 13
IEEE 802.11b (2.4 GHz)	Maximum	7.25	
	Nominal	5.75	
IEEE 802.11g (2.4 GHz)	Maximum	7.25	0.00
	Nominal	5.75	-1.50
IEEE 802.11n (2.4 GHz)	Maximum	7.25	0.00
	Nominal	5.75	-1.50
Mode / Band		Modulated Average - MIMO (dBm)	
		Ch. 1-12	Ch. 13
IEEE 802.11g/n (2.4 GHz)	Maximum	7.25	-1.50
	Nominal	5.75	-3.00

Note: In MIMO operations, Antenna 2A transmits at maximum allowed powers as indicated above.
The above power levels are implemented when 2G/3G/4G Operations are active with Antenna 2A/2B.

C. Antenna 5 – Output Power for Simultaneous Operations with 2G/3G/4G Antennas 1/3/4A/4B/2A/2B

Mode / Band		Modulated Average (dBm)
Bluetooth BDR/LE	Maximum	15.50
Bluetooth EDR	Maximum	11.50
Bluetooth HDR	Maximum	6.50

The above power levels are implemented when 2G/3G/4G Operations are active with Antenna 1/2A/2B with 5 GHz WIFI.

FCC ID: BCGA2014	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 13 of 195

Mode / Band		Modulated Average (dBm)								
		20 MHz Bandwidth			40 MHz Bandwidth			80 MHz Bandwidth		
		Ch. 36-48	Ch. 52-64	Ch. 100-165	Ch. 38-46	Ch. 54-62	Ch. 102-159	Ch. 42	Ch. 58	Ch. 106-155
IEEE 802.11a (5 GHz)	Maximum	8.50	9.75	9.00						
	Nominal	7.00	8.25	7.50						
IEEE 802.11n (5 GHz)	Maximum	8.50	9.75	9.00	8.50	9.75	9.00			
	Nominal	7.00	8.25	7.50	7.00	8.25	7.50			
IEEE 802.11ac (5 GHz)	Maximum	8.50	9.75	9.00	8.50	9.75	9.00	8.50	9.75	9.00
	Nominal	7.00	8.25	7.50	7.00	8.25	7.50	7.00	8.25	7.50
Mode / Band		Modulated Average - MIMO (CDD/SDM) (dBm)								
		20 MHz Bandwidth			40 MHz Bandwidth			80 MHz Bandwidth		
		Ch. 36-48	Ch. 52-64	Ch. 100-165	Ch. 38-46	Ch. 54-62	Ch. 102-159	Ch. 42	Ch. 58	Ch. 106-155
IEEE 802.11a (5 GHz)	Maximum	8.50	9.75	9.00						
	Nominal	7.00	8.25	7.50						
IEEE 802.11n (5 GHz)	Maximum	8.50	9.75	9.00	8.50	9.75	9.00			
	Nominal	7.00	8.25	7.50	7.00	8.25	7.50			
IEEE 802.11ac (5 GHz)	Maximum	8.50	9.75	9.00	8.50	9.75	9.00	8.50	9.75	9.00
	Nominal	7.00	8.25	7.50	7.00	8.25	7.50	7.00	8.25	7.50

Note: In MIMO operations, Antenna 5 transmits at maximum allowed powers as indicated above for both 2 Tx CDD and 2 Tx SDM.
The above power levels are implemented when 2G/3G/4G Operations are active with Antenna 2A.

D. Antenna 6- Output Power for Simultaneous Operations with 2G/3G/4G Antenna 3

Mode / Band		Modulated Average (dBm)										
		20 MHz Bandwidth				40 MHz Bandwidth				80 MHz Bandwidth		
		Ch. 36-48	Ch. 52-64	Ch. 100-144	Ch. 149-165	Ch. 38-46	Ch. 54-62	Ch. 102-142	Ch. 151-159	Ch. 42	Ch. 58	Ch. 106-138
IEEE 802.11a (5 GHz)	Maximum	12.50	11.50	11.25	10.50							
	Nominal	11.00	10.00	9.75	9.00							
IEEE 802.11n (5 GHz)	Maximum	12.50	11.50	11.25	10.50	12.50	11.50	11.25	10.50			
	Nominal	11.00	10.00	9.75	9.00	11.00	10.00	9.75	9.00			
IEEE 802.11ac (5 GHz)	Maximum	12.50	11.50	11.25	10.50	12.50	11.50	11.25	10.50	12.50	11.50	11.25
	Nominal	11.00	10.00	9.75	9.00	11.00	10.00	9.75	9.00	11.00	10.00	9.75
Mode / Band		Modulated Average - MIMO (CDD/SDM) (dBm)										
		20 MHz Bandwidth				40 MHz Bandwidth				80 MHz Bandwidth		
		Ch. 36-48	Ch. 52-64	Ch. 100-144	Ch. 149-165	Ch. 38-46	Ch. 54-62	Ch. 102-142	Ch. 151-159	Ch. 42	Ch. 58	Ch. 106-138
IEEE 802.11a (5 GHz)	Maximum	12.50	11.50	11.25	10.50							
	Nominal	11.00	10.00	9.75	9.00							
IEEE 802.11n (5 GHz)	Maximum	12.50	11.50	11.25	10.50	12.50	11.50	11.25	10.50			
	Nominal	11.00	10.00	9.75	9.00	11.00	10.00	9.75	9.00			
IEEE 802.11ac (5 GHz)	Maximum	12.50	11.50	11.25	10.50	12.50	11.50	11.25	10.50	11.50	11.00	11.25
	Nominal	11.00	10.00	9.75	9.00	11.00	10.00	9.75	9.00	10.00	9.50	9.75

Note: In MIMO operations, Antenna 6 transmits at maximum allowed powers as indicated above for both 2 Tx CDD and 2 Tx SDM.

FCC ID: BCGA2014	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 14 of 195

1.4 DUT Antenna Locations

The overall diagonal dimension of the device is > 200 mm. A diagram showing the location of the device antennas can be found in Appendix F. Exact antenna dimensions and separation distances are shown in the Technical Descriptions in the FCC filings.

Table 1-1
Device Edges/Sides for SAR Testing

Mode	Back	Front	Top	Bottom	Right	Left
GPRS 850 Ant 1	Yes	No	No	Yes	No	Yes
GPRS 850 Ant 3	Yes	No	Yes	No	Yes	No
GPRS 1900 Ant 4A	Yes	No	Yes	No	No	Yes
GPRS 1900 Ant 4B	Yes	No	Yes	No	No	Yes
GPRS 1900 Ant 2A	Yes	No	No	Yes	Yes	No
GPRS 1900 Ant 2B	Yes	No	No	Yes	Yes	No
UMTS 850 Ant 1	Yes	No	No	Yes	No	Yes
UMTS 850 Ant 3	Yes	No	Yes	No	Yes	No
UMTS 1750 Ant 4A	Yes	No	Yes	No	No	Yes
UMTS 1750 Ant 4B	Yes	No	Yes	No	No	Yes
UMTS 1750 Ant 2A	Yes	No	No	Yes	Yes	No
UMTS 1750 Ant 2B	Yes	No	No	Yes	Yes	No
UMTS 1900 Ant 4A	Yes	No	Yes	No	No	Yes
UMTS 1900 Ant 4B	Yes	No	Yes	No	No	Yes
UMTS 1900 Ant 2A	Yes	No	No	Yes	Yes	No
UMTS 1900 Ant 2B	Yes	No	No	Yes	Yes	No
LTE Band 71 Ant 1	Yes	No	No	Yes	No	Yes
LTE Band 71 Ant 3	Yes	No	Yes	No	Yes	No
LTE Band 12 Ant 1	Yes	No	No	Yes	No	Yes
LTE Band 12 Ant 3	Yes	No	Yes	No	Yes	No
LTE Band 13 Ant 1	Yes	No	No	Yes	No	Yes
LTE Band 13 Ant 3	Yes	No	Yes	No	Yes	No
LTE Band 14 Ant 1	Yes	No	No	Yes	No	Yes
LTE Band 14 Ant 3	Yes	No	Yes	No	Yes	No
LTE Band 5 Ant 1	Yes	No	No	Yes	No	Yes
LTE Band 5 Ant 3	Yes	No	Yes	No	Yes	No
LTE Band 26 Ant 1	Yes	No	No	Yes	No	Yes
LTE Band 26 Ant 3	Yes	No	Yes	No	Yes	No
LTE Band 66 Ant 4A	Yes	No	Yes	No	No	Yes
LTE Band 66 Ant 4B	Yes	No	Yes	No	No	Yes
LTE Band 66 Ant 2A	Yes	No	No	Yes	Yes	No
LTE Band 66 Ant 2B	Yes	No	No	Yes	Yes	No
LTE Band 4 Ant 2A	Yes	No	No	Yes	Yes	No
LTE Band 25 Ant 4A	Yes	No	Yes	No	No	Yes
LTE Band 25 Ant 4B	Yes	No	Yes	No	No	Yes
LTE Band 25 Ant 2A	Yes	No	No	Yes	Yes	No
LTE Band 25 Ant 2B	Yes	No	No	Yes	Yes	No
LTE Band 30 Ant 4A	Yes	No	Yes	No	No	Yes
LTE Band 30 Ant 4B	Yes	No	Yes	No	No	Yes
LTE Band 30 Ant 2A	Yes	No	No	Yes	Yes	No
LTE Band 30 Ant 2B	Yes	No	No	Yes	Yes	No
LTE Band 7 Ant 4A	Yes	No	Yes	No	No	Yes
LTE Band 7 Ant 4B	Yes	No	Yes	No	No	Yes
LTE Band 7 Ant 2A	Yes	No	No	Yes	Yes	No
LTE Band 7 Ant 2B	Yes	No	No	Yes	Yes	No
LTE Band 41 Ant 4A	Yes	No	Yes	No	No	Yes
LTE Band 41 Ant 4B	Yes	No	Yes	No	No	Yes
LTE Band 41 Ant 2A	Yes	No	No	Yes	Yes	No
LTE Band 41 Ant 2B	Yes	No	No	Yes	Yes	No
2.4 GHz WLAN Ant 4A	Yes	No	Yes	No	No	Yes
2.4 GHz WLAN Ant 2A	Yes	No	No	Yes	Yes	No
2.4 GHz WLAN Ant 5	Yes	No	No	Yes	Yes	No
5 GHz WLAN Ant 5	Yes	No	No	Yes	Yes	No
5 GHz WLAN Ant 6	Yes	No	Yes	No	Yes	No
Bluetooth Ant 4A	Yes	No	Yes	No	No	Yes
Bluetooth Ant 2A	Yes	No	No	Yes	Yes	No
Bluetooth Ant 5	Yes	No	No	Yes	Yes	No

Note: Per FCC KDB Publication 616217 D04v01r01, particular edges were not required to be evaluated for SAR based on the SAR exclusion threshold in KDB 447498 D01V06. Additional edges may have been evaluated for simultaneous transmission analysis.

FCC ID: BCGA2014	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 15 of 195

1.5 Simultaneous Transmission Capabilities

According to FCC KDB Publication 447498 D01v06, transmitters are considered to be transmitting simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds.

This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis according to FCC KDB Publication 447498 D01v06 4.3.2 procedures

Table 1-2
Simultaneous Transmission Scenarios

No.	Capable Transmit Configuration	Body
1	Cellular Band + 2.4 GHz WI-FI	Yes
2	Cellular Band + 5 GHz WI-FI	Yes
3	Cellular Band + 2.4 GHz Bluetooth	Yes
4	Cellular Band+ 2.4 GHz WI-FI MIMO	Yes
5	Cellular Band + 5 GHz WI-FI MIMO	Yes
6	Cellular Band + 2.4 GHz Bluetooth + 5 GHz WI-FI	Yes
7	Cellular Band + 2.4 GHz Bluetooth + 5 GHz WI-FI MIMO	Yes
8	2.4 GHz Bluetooth + 5 GHz WI-FI	Yes
9	2.4 GHz Bluetooth + 5 GHz WI-FI MIMO	Yes

1. There are no limitations in the above listed simultaneous transmission scenarios between cellular antennas and BT/WI-FI antennas.
2. 2.4 GHz WLAN on Antenna 2A cannot transmit simultaneously with 2.4 GHz WLAN on Antenna 5.
3. 2.4 GHz WLAN and 2.4 GHz Bluetooth share the same antenna path and cannot transmit simultaneously on any antenna (2A, 4A, 5).
4. All licensed modes share the same antenna path and cannot transmit simultaneously.
5. This device supports 2x2 MIMO Tx for WLAN. 802.11a/g/n/ac supports CDD/STBC and 802.11n/ac additionally supports SDM. Each WLAN antenna can transmit independently or together when operating with MIMO.
6. This device supports VoWiFi.

1.6 Miscellaneous SAR Test Considerations

(A) WIFI/BT

Based on the maximum allowed power for the respective antennas, U-NII-1 was evaluated for Antenna 6 SAR, and U-NII-2A was evaluated for Antenna 5 SAR. Additional testing for U-NII-2A Antenna 6 SAR, or U-NII-1 Antenna 5 SAR was not required since all reported SAR was less than 1.2 W/kg per FCC KDB Publication 248227 D01v02r02.

The WLAN/Bluetooth chipset in this device is produced by two different suppliers. The electrically identical modules are manufactured with the identical mechanical structure to meet the same specifications and

FCC ID: BCGA2014	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 16 of 195

functions. Two device variants are referenced as Variant 1 and Variant 2 in this report. WLAN/Bluetooth SAR worst case configuration was spotchecked on Variant 1 and Variant 2. The Variant with the highest reported SAR value was evaluated for the remaining WLAN/Bluetooth configurations.

This device supports channel 1-13 for 2.4 GHz WLAN. However, because channel 12/13 targets are not higher than that of channels 1-11, channels 1, 6 and 11 were considered for SAR testing per FCC KDB 248227 D01V02r02.

This device supports IEEE 802.11ac with the following features:

- a) Up to 80 MHz Bandwidth only
- b) No aggregate channel configurations
- c) 2 Tx antenna output
- d) 256 QAM is supported
- e) TDWR and Band gap channels are supported

(B) Licensed Transmitter(s)

This device is only capable of QPSK HSUPA in the uplink. Therefore, no additional SAR tests are required beyond that described for devices with HSUPA in KDB 941225 D01v03r01.

LTE SAR for the higher modulations and lower bandwidths were not tested since the maximum average output power of all required channels and configurations was not more than 0.5 dB higher than the highest bandwidth; and the reported LTE SAR for the highest bandwidth was less than 1.45 W/kg for all configurations according to FCC KDB 941225 D05v02r04.

This device supports LTE Carrier Aggregation (CA) in the downlink. All uplink communications are identical to Release 8 specifications. Per FCC KDB Publication 941225 D05A v01r02, SAR for LTE CA operations was not needed since the maximum average output power in LTE CA mode was not >0.25 dB higher than the maximum output power when downlink carrier aggregation was inactive. DLCA power measurements can be found in Appendix H.

This device supports LTE Carrier Aggregation (CA) in the uplink for LTE Band 7 and LTE Band 41 with two component carriers in the uplink. SAR Measurements and conducted powers were evaluated per 2017 Fall TCB Workshop Notes.

This device supports downlink 4x4 MIMO operations for some LTE Bands. Per May 2017 TCB Workshop Guidance, SAR for downlink 4x4 MIMO was not needed since the maximum average output power in 4x4 downlink MIMO mode was not > 0.25 dB higher than the maximum output power with downlink 4x4 MIMO inactive.

This device supports 64QAM on the uplink and 256QAM on the downlink for LTE Operations. Conducted powers for 64QAM uplink configurations were measured per Section 5.1 of FCC KDB Publication 941225 D05v02r05. SAR was not required for 64QAM since the highest maximum output power for 64 QAM is $\leq \frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg, per Section 5.2.4 of FCC KDB Publication 941225 D05v02r05.

This device supports both Power Class 2 (PC2) and Power Class 3 (PC3) for LTE Band 41. Per May 2017 TCB Workshop Notes, SAR tests were performed with Power Class 3 (given the specific UL/DL limitations for Power Class 2). Additionally, SAR testing for the power class condition was evaluated for the highest configuration in Power Class 3 for each test configuration to confirm the results were scalable linearly (See Section 14.2).

FCC ID: BCGA2014	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 17 of 195

This device supports LTE capabilities with overlapping transmission frequency ranges. When the supported frequency range of an LTE Band falls completely within an LTE band with a larger transmission frequency range, both LTE bands have the same target power (or the band with the larger transmission frequency range has a higher target power), and both LTE bands share the same transmission path and signal characteristics, SAR was only assessed for the band with the larger transmission frequency range.

1.7 Guidance Applied

- FCC KDB Publication 941225 D01v03r01, D05v02r04, D05Av01r02 (2G/3G/4G)
- FCC KDB Publication 248227 D01v02r02 (SAR Considerations for 802.11 Devices)
- FCC KDB Publication 447498 D01v06 (General SAR Guidance)
- FCC KDB Publication 865664 D01v01r04, D02v01r02 (SAR Measurements up to 6 GHz)
- FCC KDB Publication 616217 D04v01r02 (Tablet)
- October 2013 TCB Workshop Notes (GPRS Testing Considerations)
- May 2017 TCB Workshop Notes (LTE 4x4 Downlink MIMO, LTE Band 41 Power Class 2/3)
- April 2018 TCB Workshop Notes (LTE Carrier Aggregation)

1.8 Device Serial Numbers

Several samples with identical hardware were used to support SAR testing. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units. The serial numbers used for each test are indicated alongside the results in Section 10.

FCC ID: BCGA2014	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 18 of 195

LTE Information					
FCC ID	BCGA2014				
Form Factor	Tablet Device				
Frequency Range of each LTE transmission band	LTE Band 71 (665.5 - 695.5 MHz)				
	LTE Band 12 (699.7 - 715.3 MHz)				
	LTE Band 17 (706.5 - 713.5 MHz)				
	LTE Band 13 (779.5 - 784.5 MHz)				
	LTE Band 14 (790.5 - 795.5 MHz)				
	LTE Band 5 (Cell) (824.7 - 848.3 MHz)				
	LTE Band 26 (Cell) (814.7 - 848.3 MHz)				
	LTE Band 66 (AWS) (1710.7 - 1779.3 MHz)				
	LTE Band 4 (AWS) (1710.7 - 1754.3 MHz)				
	LTE Band 25 (PCS) (1850.7 - 1914.3 MHz)				
	LTE Band 2 (PCS) (1850.7 - 1909.3 MHz)				
	LTE Band 30 (2307.5 - 2312.5 MHz)				
	LTE Band 7 (2502.5 - 2567.5 MHz)				
	LTE Band 41 (2498.5 - 2687.5 MHz)				
Channel Bandwidths	LTE Band 71: 5 MHz, 10 MHz, 15 MHz, 20 MHz				
	LTE Band 12: 1.4 MHz, 3 MHz, 5 MHz, 10 MHz				
	LTE Band 17: 5 MHz, 10 MHz				
	LTE Band 13: 5 MHz, 10 MHz				
	LTE Band 14: 5 MHz, 10 MHz				
	LTE Band 5 (Cell): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz				
	LTE Band 26 (Cell): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz				
	LTE Band 66 (AWS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz				
	LTE Band 4 (AWS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz				
	LTE Band 25 (PCS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz				
	LTE Band 2 (PCS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz				
	LTE Band 30: 5 MHz, 10 MHz				
	LTE Band 7: 5 MHz, 10 MHz, 15 MHz, 20 MHz				
	LTE Band 41: 5 MHz, 10 MHz, 15 MHz, 20 MHz				
Channel Numbers and Frequencies (MHz)	Low	Low-Mid	Mid	Mid-High	High
LTE Band 71: 5 MHz	665.5 (133147)	680.5 (133297)	695.5 (133447)		
LTE Band 71: 10 MHz	668 (133172)	680.5 (133297)	693 (133422)		
LTE Band 71: 15 MHz	670.5 (133197)	680.5 (133297)	690.5 (133397)		
LTE Band 71: 20 MHz	673 (133222)	680.5 (133297)	688 (133372)		
LTE Band 12: 1.4 MHz	699.7 (23017)	707.5 (23095)	715.3 (23173)		
LTE Band 12: 3 MHz	700.5 (23025)	707.5 (23095)	714.5 (23165)		
LTE Band 12: 5 MHz	701.5 (23035)	707.5 (23095)	713.5 (23155)		
LTE Band 12: 10 MHz	704 (23060)	707.5 (23095)	711 (23130)		
LTE Band 17: 5 MHz	706.5 (23755)	710 (23790)	713.5 (23825)		
LTE Band 17: 10 MHz	709 (23780)	710 (23790)	711 (23800)		
LTE Band 13: 5 MHz	779.5 (23205)	782 (23230)	784.5 (23255)		
LTE Band 13: 10 MHz	N/A	782 (23230)	N/A		
LTE Band 14: 5 MHz	790.5 (23305)	793 (23330)	795.5 (23355)		
LTE Band 14: 10 MHz	N/A	793 (23330)	N/A		
LTE Band 5 (Cell): 1.4 MHz	824.7 (20407)	836.5 (20525)	848.3 (20643)		
LTE Band 5 (Cell): 3 MHz	825.5 (20415)	836.5 (20525)	847.5 (20635)		
LTE Band 5 (Cell): 5 MHz	826.5 (20425)	836.5 (20525)	846.5 (20625)		
LTE Band 5 (Cell): 10 MHz	829 (20450)	836.5 (20525)	844 (20600)		
LTE Band 26 (Cell): 1.4 MHz	814.7 (26697)	831.5 (26865)	848.3 (27033)		
LTE Band 26 (Cell): 3 MHz	815.5 (26705)	831.5 (26865)	847.5 (27025)		
LTE Band 26 (Cell): 5 MHz	816.5 (26715)	831.5 (26865)	846.5 (27015)		
LTE Band 26 (Cell): 10 MHz	819 (26740)	831.5 (26865)	844 (26990)		
LTE Band 66 (AWS): 1.4 MHz	1710.7 (131979)	1745 (132322)	1779.3 (132665)		
LTE Band 66 (AWS): 3 MHz	1711.5 (131987)	1745 (132322)	1778.5 (132657)		
LTE Band 66 (AWS): 5 MHz	1712.5 (131997)	1745 (132322)	1777.5 (132647)		
LTE Band 66 (AWS): 10 MHz	1715 (132022)	1745 (132322)	1775 (132622)		
LTE Band 66 (AWS): 15 MHz	1717.5 (132047)	1745 (132322)	1772.5 (132597)		
LTE Band 66 (AWS): 20 MHz	1720 (132072)	1745 (132322)	1770 (132572)		
LTE Band 4 (AWS): 1.4 MHz	1710.7 (19967)	1732.5 (20175)	1754.3 (20385)		
LTE Band 4 (AWS): 3 MHz	1711.5 (19965)	1732.5 (20175)	1753.5 (20385)		
LTE Band 4 (AWS): 5 MHz	1712.5 (19975)	1732.5 (20175)	1752.5 (20375)		
LTE Band 4 (AWS): 10 MHz	1715 (20000)	1732.5 (20175)	1750 (20350)		
LTE Band 4 (AWS): 15 MHz	1717.5 (20025)	1732.5 (20175)	1747.5 (20325)		
LTE Band 4 (AWS): 20 MHz	1720 (20050)	1732.5 (20175)	1745 (20300)		
LTE Band 25 (PCS): 1.4 MHz	1850.7 (26047)	1882.5 (26365)	1914.3 (26683)		
LTE Band 25 (PCS): 3 MHz	1851.5 (26055)	1882.5 (26365)	1913.5 (26675)		
LTE Band 25 (PCS): 5 MHz	1852.5 (26065)	1882.5 (26365)	1912.5 (26665)		
LTE Band 25 (PCS): 10 MHz	1855 (26090)	1882.5 (26365)	1910 (26640)		
LTE Band 25 (PCS): 15 MHz	1857.5 (26115)	1882.5 (26365)	1907.5 (26615)		
LTE Band 25 (PCS): 20 MHz	1860 (26140)	1882.5 (26365)	1905 (26590)		
LTE Band 2 (PCS): 1.4 MHz	1850.7 (18607)	1880 (18900)	1909.3 (19193)		
LTE Band 2 (PCS): 3 MHz	1851.5 (18615)	1880 (18900)	1908.5 (19185)		
LTE Band 2 (PCS): 5 MHz	1852.5 (18625)	1880 (18900)	1907.5 (19175)		
LTE Band 2 (PCS): 10 MHz	1855 (18650)	1880 (18900)	1905 (19150)		
LTE Band 2 (PCS): 15 MHz	1857.5 (18675)	1880 (18900)	1902.5 (19125)		
LTE Band 2 (PCS): 20 MHz	1860 (18700)	1880 (18900)	1900 (19100)		
LTE Band 30: 5 MHz	2307.5 (27685)	2310 (27710)	2312.5 (27735)		
LTE Band 30: 10 MHz	N/A	2310 (27710)	N/A		
LTE Band 7: 5 MHz	2502.5 (20775)	2535 (21100)	2567.5 (21425)		
LTE Band 7: 10 MHz	2505 (20800)	2535 (21100)	2566 (21400)		
LTE Band 7: 15 MHz	2507.5 (20825)	2535 (21100)	2562.5 (21375)		
LTE Band 7: 20 MHz	2510 (20850)	2535 (21100)	2560 (21350)		
LTE Band 41: 5 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)	2680 (41490)
LTE Band 41: 10 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)	2680 (41490)
LTE Band 41: 15 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)	2680 (41490)
LTE Band 41: 20 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)	2680 (41490)
UE Category	DL UE Cat 16 (QPSK, 16QAM, 64QAM, 256QAM), UL UE Cat 13 (QPSK, 16QAM, 64QAM)				
Modulations Supported in UL	QPSK, 16QAM, 64QAM				
LTE MPR Permanently implemented per 3GPP TS 36.101, section 6.2.3-6.2.5? (manufacturer attestation to be provided)	YES				
A-MPR (Additional MPR) disabled for SAR Testing?	YES				
LTE Carrier Aggregation Possible Combinations	The technical description includes all the possible carrier aggregation combinations				
LTE Additional Information	This device does not support full CA features on 3GPP Release 13. It supports carrier aggregation and downlink MIMO features as shown in Section 8 and Appendix H. All other uplink communications are identical to the Release 8 specifications. Uplink communications are done on the PCC unless otherwise specified. The following LTE Release 13 Features are not supported: Relay, HetNet, Enhanced MIMO, eCIC, eMBMS, Cross-Carrier Scheduling, Enhanced SC-FDMA.				

FCC ID: BCGA2014	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 19 of 195

3 INTRODUCTION

The FCC and Innovation, Science, and Economic Development Canada have adopted the guidelines for evaluating the environmental effects of radio frequency (RF) radiation in ET Docket 93-62 on Aug. 6, 1996 and Health Canada Safety Code 6 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices. [1]

The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95.1-1992 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz [3] and Health Canada RF Exposure Guidelines Safety Code 6 [22]. The measurement procedure described in IEEE/ANSI C95.3-2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave [4] is used for guidance in measuring the Specific Absorption Rate (SAR) due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the International Committee for Non-Ionizing Radiation Protection (ICNIRP) in Biological Effects and Exposure Criteria for Radiofrequency Electromagnetic Fields,” Report No. Vol 74. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

3.1 SAR Definition

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Equation 3-1).

Equation 3-1
SAR Mathematical Equation

$$SAR = \frac{d}{dt} \left(\frac{dU}{dm} \right) = \frac{d}{dt} \left(\frac{dU}{\rho dv} \right)$$

SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

where:

- σ = conductivity of the tissue-simulating material (S/m)
- ρ = mass density of the tissue-simulating material (kg/m³)
- E = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relation to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.[6]

FCC ID: BCGA2014	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 20 of 195

4 DOSIMETRIC ASSESSMENT

4.1 Measurement Procedure

The evaluation was performed using the following procedure compliant to FCC KDB Publication 865664 D01v01r04 and IEEE 1528-2013:

1. The SAR distribution at the exposed side of the head or body was measured at a distance no greater than 5.0 mm from the inner surface of the shell. The area covered the entire dimension of the device-head and body interface and the horizontal grid resolution was determined per FCC KDB Publication 865664 D01v01r04 (See Table 4-1) and IEEE 1528-2013.
2. The point SAR measurement was taken at the maximum SAR region determined from Step 1 to enable the monitoring of SAR fluctuations/drifts during the 1g/10g cube evaluation. SAR at this fixed point was measured and used as a reference value.
3. Based on the area scan data, the peak of the region with maximum SAR was determined by spline interpolation. Around this point, a volume was assessed according to the measurement resolution and volume size requirements of FCC KDB Publication 865664 D01v01r04 (See Table 4-1) and IEEE 1528-2013. On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure (see references or the DASY manual online for more details):
 - a. SAR values at the inner surface of the phantom are extrapolated from the measured values along the line away from the surface with spacing no greater than that in Table 4-1. The extrapolation was based on a least-squares algorithm. A polynomial of the fourth order was calculated through the points in the z-axis (normal to the phantom shell).
 - b. After the maximum interpolated values were calculated between the points in the cube, the SAR was averaged over the spatial volume (1g or 10g) using a 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the "Not a knot" condition (in x, y, and z directions). The volume was then integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were obtained through interpolation, in order to calculate the averaged SAR.
 - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR reference value, at the same location as step 2, was re-measured after the zoom scan was complete to calculate the SAR drift. If the drift deviated by more than 5%, the SAR test and drift measurements were repeated.




Figure 4-1 point
Sample SAR Area
Scan

Table 4-1
Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v01r04*

Frequency	Maximum Area Scan Resolution (mm) ($\Delta x_{\text{area}}, \Delta y_{\text{area}}$)	Maximum Zoom Scan Resolution (mm) ($\Delta x_{\text{zoom}}, \Delta y_{\text{zoom}}$)	Maximum Zoom Scan Spatial Resolution (mm)			Minimum Zoom Scan Volume (mm) (x,y,z)
			Uniform Grid	Graded Grid		
				$\Delta z_{\text{zoom}}(n)$	$\Delta z_{\text{zoom}}(1)^*$	
≤ 2 GHz	≤ 15	≤ 8	≤ 5	≤ 4	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 30
2-3 GHz	≤ 12	≤ 5	≤ 5	≤ 4	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 30
3-4 GHz	≤ 12	≤ 5	≤ 4	≤ 3	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 28
4-5 GHz	≤ 10	≤ 4	≤ 3	≤ 2.5	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 25
5-6 GHz	≤ 10	≤ 4	≤ 2	≤ 2	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 22

*Also compliant to IEEE 1528-2013 Table 6

FCC ID: BCGA2014	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 21 of 195

5 TEST CONFIGURATION POSITIONS

5.1 Device Holder

The device holder is made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$.

5.2 SAR Testing for Tablet per KDB Publication 616217 D04v01r02

Per FCC KDB Publication 616217 D04v01r02, the back surface and edges of the tablet should be tested for SAR compliance with the tablet touching the phantom. The SAR Exclusion Threshold in KDB 447498 D01v06 can be applied to determine SAR test exclusion for adjacent edge configurations. The closest distance from the antenna to an adjacent tablet edge is used to determine if SAR testing is required for the adjacent edges, with the adjacent edge positioned against the phantom and the edge containing the antenna positioned perpendicular to the phantom.

FCC ID: BCGA2014	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 22 of 195

6 RF EXPOSURE LIMITS

6.1 Uncontrolled Environment

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

6.2 Controlled Environment

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Table 6-1
SAR Human Exposure Specified in ANSI/IEEE C95.1-1992 and Health Canada Safety Code 6

HUMAN EXPOSURE LIMITS		
	UNCONTROLLED ENVIRONMENT <i>General Population</i> (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT <i>Occupational</i> (W/kg) or (mW/g)
Peak Spatial Average SAR Head	1.6	8.0
Whole Body SAR	0.08	0.4
Peak Spatial Average SAR Hands, Feet, Ankle, Wrists, etc.	4.0	20

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

FCC ID: BCGA2014	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 23 of 195

7 FCC MEASUREMENT PROCEDURES

Power measurements for licensed transmitters are performed using a base station simulator under digital average power.

7.1 Measured and Reported SAR

Per FCC KDB Publication 447498 D01v06, when SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as *reported* SAR. The highest *reported* SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r03.

7.2 3G SAR Test Reduction Procedure

In FCC KDB Publication 941225 D01v03r01, certain transmission modes within a frequency band and wireless mode evaluated for SAR are defined as primary modes. The equivalent modes considered for SAR test reduction are denoted as secondary modes. When the maximum output power including tune-up tolerance specified for production units in a secondary mode is ≤ 0.25 dB higher than the primary mode or when the highest reported SAR of the primary mode, scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode, is ≤ 1.2 W/kg, SAR measurements are not required for the secondary mode. These criteria are referred to as the 3G SAR test reduction procedure. When the 3G SAR test reduction procedure is not satisfied, SAR measurements are additionally required for the secondary mode.

7.3 Procedures Used to Establish RF Signal for SAR

The following procedures are according to FCC KDB Publication 941225 D01v03r01 “3G SAR Measurement Procedures.”

The device is placed into a simulated call using a base station simulator in a RF shielded chamber. Establishing connections in this manner ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. Devices under test are evaluated prior to testing, with a fully charged battery and were configured to operate at maximum output power. In order to verify that the device is tested throughout the SAR test at maximum output power, the SAR measurement system measures a “point SAR” at an arbitrary reference point at the start and end of the 1 gram SAR evaluation, to assess for any power drifts during the evaluation. If the power drift deviates by more than 5%, the SAR test and drift measurements are repeated.

7.4 SAR Measurement Conditions for UMTS

7.4.1 Output Power Verification

Maximum output power is verified on the High, Middle and Low channels according to the general descriptions in section 5.2 of 3GPP TS 34.121, using the appropriate RMC with TPC (transmit power control) set to all “1s” or applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HS-DPCCH etc) are tabulated in this test report. All configurations that are not supported by the DUT or cannot be measured due to technical or equipment limitations are identified.

FCC ID: BCGA2014	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 24 of 195

7.4.2 Body SAR Measurements

SAR for body exposure configurations is measured using the 12.2 kbps RMC with the TPC bits all “1s”. The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCH_n configurations supported by the handset with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured using an applicable RMC configuration with the corresponding spreading code or DPDCH_n, for the highest reported SAR configuration in 12.2 kbps RMC.

7.4.3 SAR Measurements with Rel 5 HSDPA

The 3G SAR test reduction procedure is applied to HSDPA body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSDPA is measured using an FRC with H-Set 1 in Sub-test 1 and a 12.2 kbps RMC configured in Test Loop Mode 1, for the highest reported SAR configuration in 12.2 kbps RMC without HSDPA. Handsets with both HSDPA and HSUPA are tested according to Release 6 HSPA test procedures.

7.4.4 SAR Measurements with Rel 6 HSUPA

The 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSPA is measured with E-DCH Sub-test 5, using H-Set 1 and QPSK for FRC and a 12.2 kbps RMC configured in Test Loop Mode 1 and power control algorithm 2, according to the highest reported body SAR configuration in 12.2 kbps RMC without HSPA.

When VOIP applies to head exposure, the 3G SAR test reduction procedure is applied with 12.2 kbps RMC as the primary mode; otherwise, the same HSPA configuration used for body SAR measurements are applied to head exposure testing.

7.4.5 SAR Measurement Conditions for DC-HSDPA

SAR is required for Rel. 8 DC-HSDPA when SAR is required for Rel. 5 HSDPA; otherwise, the 3G SAR test reduction procedure is applied to DC-HSDPA with 12.2 kbps RMC as the primary mode. Power is measured for DC-HSDPA according to the H-Set 12, FRC configuration in Table C.8.1.12 of 3GPP TS 34.121-1 to determine SAR test reduction. A primary and a secondary serving HS-DSCH Cell are required to perform the power measurement and for the results to be acceptable.

7.5 SAR Measurement Conditions for LTE

LTE modes are tested according to FCC KDB 941225 D05v02r04 publication. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. The R&S CMW500 or Anritsu MT8820C simulators are used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

7.5.1 Spectrum Plots for RB Configurations

A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

FCC ID: BCGA2014	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 25 of 195

7.5.2 MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.

7.5.3 A-MPR

A-MPR (Additional MPR) has been disabled for all SAR tests by setting NS=01 on the base station simulator.

7.5.4 Required RB Size and RB Offsets for SAR Testing

According to FCC KDB 941225 D05v02r04:

- a. Per Section 5.2.1, SAR is required for QPSK 1 RB Allocation for the largest bandwidth
 - i. The required channel and offset combination with the highest maximum output power is required for SAR.
 - ii. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required. Otherwise, SAR is required for the remaining required test channels using the RB offset configuration with highest output power for that channel.
 - iii. When the reported SAR for a required test channel is > 1.45 W/kg, SAR is required for all RB offset configurations for that channel.
- b. Per Section 5.2.2, SAR is required for 50% RB allocation using the largest bandwidth following the same procedures outlined in Section 5.2.1.
- c. Per Section 5.2.3, QPSK SAR is not required for the 100% allocation when the highest maximum output power for the 100% allocation is less than the highest maximum output power of the 1 RB and 50% RB allocations and the reported SAR for the 1 RB and 50% RB allocations is < 0.8 W/kg.
- d. Per Section 5.2.4 and 5.3, SAR tests for higher order modulations and lower bandwidths configurations are not required when the conducted power of the required test configurations determined by Sections 5.2.1 through 5.2.3 is less than or equal to $\frac{1}{2}$ dB higher than the equivalent configuration using QPSK modulation and when the QPSK SAR for those configurations is < 1.45 W/kg.

According to FCC KDB 447498 D01v06, when the reported (scaled) SAR for LTE Band 41 is ≤ 0.6 W/kg, testing of the remaining RB offset configurations and required test channels is not required. Otherwise, SAR is required for the remaining required test channels using the RB offset configuration with highest output power for that channel.

7.5.5 TDD

LTE TDD testing is performed using the SAR test guidance provided in FCC KDB 941225 D05v02r04. TDD is tested at the highest duty factor using UL-DL configuration 0 with special subframe configuration 6 and applying the FDD LTE procedures in KDB 941225 D05v02r04. SAR testing is performed using the extended cyclic prefix listed in 3GPP TS 36.211 Section 4.

7.5.6 Downlink Only Carrier Aggregation

Conducted power measurements with LTE Carrier Aggregation (CA) (downlink only) active are made in accordance to KDB Publication 941225 D05Av01r02. The RRC connection is only handled by one cell, the primary component carrier (PCC) for downlink and uplink communications. After making a data connection to the PCC, the UE device adds secondary component carrier(s) (SCC) on the downlink only. All uplink communications and acknowledgements remain identical to specifications when downlink carrier aggregation is inactive on the PCC. For every supported combination of downlink only carrier

FCC ID: BCGA2014	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 26 of 195

aggregation, additional conducted output powers are measured with the downlink carrier aggregation active for the configuration with highest measured maximum conducted power with downlink carrier aggregation inactive measured among the channel bandwidth, modulation, and RB combinations in each frequency band. Per FCC KDB Publication 941225 D05Av01r02, no SAR measurements are required for carrier aggregation configurations when the average output power with downlink only carrier aggregation active is not more than 0.25 dB higher than the average output power with downlink only carrier aggregation inactive.

7.6 SAR Testing with 802.11 Transmitters

The normal network operating configurations of 802.11 transmitters are not suitable for SAR measurements. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable. See KDB Publication 248227 D01v02r02 for more details.

7.6.1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters.

A periodic duty factor is required for current generation SAR systems to measure SAR. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92 - 96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. The reported SAR is scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

7.6.2 U-NII-1 and U-NII-2A

For devices that operate in both U-NII-1 and U-NII-2A bands, when the same maximum output power is specified for both bands, SAR measurement using OFDM SAR test procedures is not required for U-NII-1 unless the highest reported SAR for U-NII-2A is > 1.2 W/kg. When different maximum output powers are specified for the bands, SAR measurement for the U-NII band with the lower maximum output power is not required unless the highest reported SAR for the U-NII band with the higher maximum output power, adjusted by the ratio of lower to higher specified maximum output power for the two bands, is > 1.2 W/kg.

7.6.3 U-NII-2C and U-NII-3

The frequency range covered by U-NII-2C and U-NII-3 is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. When Terminal Doppler Weather Radar (TDWR) restriction applies, the channels at 5.60 – 5.65 GHz in U-NII-2C band must be disabled with acceptable mechanisms and documented in the equipment certification. Unless band gap channels are permanently disabled, SAR must be considered for these channels. Each band is tested independently according to the normally required OFDM SAR measurement and probe calibration frequency points requirements.

7.6.4 2.4 GHz SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either the fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

FCC ID: BCGA2014	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 27 of 195

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is > 0.8 W/kg, SAR is required for that position using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

2.4 GHz 802.11 g/n OFDM are additionally evaluated for SAR if the highest reported SAR for 802.11b, adjusted by the ratio of the OFDM to DSSS specified maximum output power, is > 1.2 W/kg. When SAR is required for OFDM modes in 2.4 GHz band, the Initial Test Configuration Procedures should be followed.

7.6.5 OFDM Transmission Mode and SAR Test Channel Selection

When the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration with the largest channel bandwidth, lowest order modulation and lowest data rate. When the maximum output power of a channel is the same for equivalent OFDM configurations; for example, 802.11a, 802.11n and 802.11ac or 802.11g and 802.11n with the same channel bandwidth, modulation and data rate etc., the lower order 802.11 mode i.e., 802.11a, then 802.11n and 802.11ac or 802.11g then 802.11n, is used for SAR measurement. When the maximum output power are the same for multiple test channels, either according to the default or additional power measurement requirements, SAR is measured using the channel closest to the middle of the frequency band or aggregated band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.

7.6.6 Initial Test Configuration Procedure

For OFDM, an initial test configuration is determined for each frequency band and aggregated band, according to the transmission mode with the highest maximum output power specified for SAR measurements. When the same maximum output power is specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration(s) with the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order IEEE 802.11 mode. The channel of the transmission mode with the highest average RF output conducted power will be the initial test configuration.

When the reported SAR is ≤ 0.8 W/kg, no additional measurements on other test channels are required. Otherwise, SAR is evaluated using the subsequent highest average RF output channel until the reported SAR result is ≤ 1.2 W/kg or all channels are measured. When there are multiple untested channels having the same subsequent highest average RF output power, the channel with higher frequency from the lowest 802.11 mode is considered for SAR measurements (See Section 7.6.5).

7.6.7 Subsequent Test Configuration Procedures

For OFDM configurations in each frequency band and aggregated band, SAR is evaluated for initial test configuration using the fixed test position or the initial test position procedure. When the highest reported SAR (for the initial test configuration), adjusted by the ratio of the specified maximum output power of the subsequent test configuration to initial test configuration, is ≤ 1.2 W/kg, no additional SAR tests for the subsequent test configurations are required.

FCC ID: BCGA2014	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 28 of 195

7.6.8 MIMO SAR considerations

Per KDB Publication 248227 D01v02r02, the simultaneous SAR provisions in KDB Publication 447498 D01v06 should be applied to determine simultaneous transmission SAR test exclusion for WIFI MIMO. If the sum of 1g single transmission chain SAR measurements is <1.6 W/kg, no additional SAR measurements for MIMO are required. Alternatively, SAR for MIMO can be measured with all antennas transmitting simultaneously at the specified maximum output power of MIMO operation. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

FCC ID: BCGA2014	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 29 of 195

8 RF CONDUCTED POWERS

8.1 GSM Conducted Powers

Table 8-1
Reduced Conducted Power – Antenna 1

Maximum Burst-Averaged Output Power					
		GPRS/EDGE Data (GMSK)		EDGE Data (8-PSK)	
Band	Channel	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot
GSM 850	128	27.43	25.72	21.92	20.92
	190	27.45	25.63	21.93	20.93
	251	27.44	25.62	21.92	20.91
Calculated Maximum Frame-Averaged Output Power					
		GPRS/EDGE Data (GMSK)		EDGE Data (8-PSK)	
Band	Channel	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot
GSM 850	128	18.40	19.70	12.89	14.90
	190	18.42	19.61	12.90	14.91
	251	18.41	19.60	12.89	14.89
GSM 850	Frame Avg. Targets:	18.47	20.48	12.97	14.98

FCC ID: BCGA2014	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 30 of 195

Table 8-2
Reduced Conducted Power – Antenna 3

Maximum Burst-Averaged Output Power					
		GPRS/EDGE Data (GMSK)		EDGE Data (8-PSK)	
Band	Channel	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot
GSM 850	128	29.28	27.18	24.69	23.68
	190	29.26	27.16	24.71	23.69
	251	29.24	27.11	24.73	23.72
Calculated Maximum Frame-Averaged Output Power					
		GPRS/EDGE Data (GMSK)		EDGE Data (8-PSK)	
Band	Channel	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot
GSM 850	128	20.25	21.16	15.66	17.66
	190	20.23	21.14	15.68	17.67
	251	20.21	21.09	15.70	17.70
GSM 850	Frame Avg.Targets:	21.22	21.18	15.72	17.73

FCC ID: BCGA2014		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 31 of 195

Table 8-3
Reduced Conducted Power – Antenna 4A

Maximum Burst-Averaged Output Power					
		GPRS/EDGE Data (GMSK)		EDGE Data (8-PSK)	
Band	Channel	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot
GSM 1900	512	22.90	19.90	22.88	19.90
	661	22.79	19.84	22.78	19.79
	810	22.84	19.80	22.86	19.78
Calculated Maximum Frame-Averaged Output Power					
		GPRS/EDGE Data (GMSK)		EDGE Data (8-PSK)	
Band	Channel	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot
GSM 1900	512	13.87	13.88	13.85	13.88
	661	13.76	13.82	13.75	13.77
	810	13.81	13.78	13.83	13.76
GSM 1900	Frame Avg.Targets:	13.87	13.88	13.87	13.88

FCC ID: BCGA2014		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 32 of 195

Table 8-4
Reduced Conducted Power – Antenna 4B

Maximum Burst-Averaged Output Power					
		GPRS/EDGE Data (GMSK)		EDGE Data (8-PSK)	
Band	Channel	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot
GSM 1900	512	23.38	20.40	23.30	20.38
	661	23.37	20.32	23.25	20.35
	810	23.34	20.31	23.22	20.34
Calculated Maximum Frame-Averaged Output Power					
		GPRS/EDGE Data (GMSK)		EDGE Data (8-PSK)	
Band	Channel	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot
GSM 1900	512	14.35	14.38	14.27	14.36
	661	14.34	14.30	14.22	14.33
	810	14.31	14.29	14.19	14.32
GSM 1900	Frame Avg.Targets:	14.37	14.38	14.37	14.38

FCC ID: BCGA2014	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 33 of 195

Table 8-5
Reduced Conducted Power – Antenna 2A

Maximum Burst-Averaged Output Power					
		GPRS/EDGE Data (GMSK)		EDGE Data (8-PSK)	
Band	Channel	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot
GSM 1900	512	23.07	19.99	21.67	20.04
	661	23.08	20.01	21.64	20.03
	810	23.07	20.02	21.64	20.04
Calculated Maximum Frame-Averaged Output Power					
		GPRS/EDGE Data (GMSK)		EDGE Data (8-PSK)	
Band	Channel	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot
GSM 1900	512	14.04	13.97	12.64	14.02
	661	14.05	13.99	12.61	14.01
	810	14.04	14.00	12.61	14.02
GSM 1900	Frame Avg.Targets:	14.07	14.08	12.72	14.08

FCC ID: BCGA2014		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 34 of 195

Table 8-6
Reduced Conducted Power – Antenna 2B

Maximum Burst-Averaged Output Power					
		GPRS/EDGE Data (GMSK)		EDGE Data (8-PSK)	
Band	Channel	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot
GSM 1900	512	22.96	19.92	21.70	19.92
	661	22.97	19.91	21.69	19.91
	810	22.96	19.92	21.68	19.91
Calculated Maximum Frame-Averaged Output Power					
		GPRS/EDGE Data (GMSK)		EDGE Data (8-PSK)	
Band	Channel	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot
GSM 1900	512	13.93	13.90	12.67	13.90
	661	13.94	13.89	12.66	13.89
	810	13.93	13.90	12.65	13.89
GSM 1900	Frame Avg. Targets:	13.97	13.98	12.72	13.98

FCC ID: BCGA2014	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device		Page 35 of 195

Note:

1. Both burst-averaged and calculated frame-averaged powers are included. Frame-averaged power was calculated from the measured burst-averaged power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
2. GPRS/EDGE (GMSK) output powers were measured with coding scheme setting of 1 (CS1) on the base station simulator. CS1 was configured to measure GPRS output power measurements and SAR to ensure GMSK modulation in the signal. Our Investigation has shown that CS1 - CS4 settings do not have any impact on the output levels or modulation in the GPRS modes.
3. EDGE (8-PSK) output powers were measured with MCS7 on the base station simulator. MCS7 coding scheme was used to measure the output powers for EDGE since investigation has shown that choosing MCS7 coding scheme will ensure 8-PSK modulation. It has been shown that MCS levels that produce 8PSK modulation do not have an impact on output power.

GSM Class: C
GPRS Multislot class: 10 (Max 2 Tx uplink slots)
EDGE Multislot class: 10 (Max 2 Tx uplink slots)
DTM Multislot Class: N/A



Figure 8-1
Power Measurement Setup

FCC ID: BCGA2014	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 36 of 195

8.2 UMTS Conducted Powers

Table 8-7
Reduced Conducted Power – Antenna 1

3GPP Release Version	Mode	3GPP 34.121 Subtest	Cellular Band [dBm]			3GPP MPR [dB]
			4132	4183	4233	
99	WCDMA	12.2 kbps RMC	20.41	20.48	20.40	-
6	HSDPA	Subtest 1	20.60	20.51	20.56	0
6		Subtest 2	20.75	20.76	20.61	0
6		Subtest 3	20.76	20.78	20.60	0.5
6		Subtest 4	20.78	20.77	20.61	0.5
6	HSUPA	Subtest 1	20.72	20.72	20.56	0
6		Subtest 2	20.59	20.67	20.46	2
6		Subtest 3	20.61	20.65	20.59	1
6		Subtest 4	20.77	20.77	20.50	2
6		Subtest 5	20.78	20.75	20.61	0
8	DC-HSDPA	Subtest 1	20.71	20.75	20.56	0
8		Subtest 2	20.76	20.74	20.62	0
8		Subtest 3	20.78	20.79	20.61	0.5
8		Subtest 4	20.77	20.77	20.60	0.5

Table 8-8
Reduced Conducted Power – Antenna 3

3GPP Release Version	Mode	3GPP 34.121 Subtest	Cellular Band [dBm]			3GPP MPR [dB]
			4132	4183	4233	
99	WCDMA	12.2 kbps RMC	21.33	21.37	21.26	-
6	HSDPA	Subtest 1	21.14	21.25	21.15	0
6		Subtest 2	21.31	21.38	21.31	0
6		Subtest 3	21.33	21.38	21.31	0.5
6		Subtest 4	21.34	21.39	21.29	0.5
6	HSUPA	Subtest 1	21.19	21.25	21.15	0
6		Subtest 2	21.35	21.36	21.30	2
6		Subtest 3	21.27	21.34	21.24	1
6		Subtest 4	21.31	21.39	21.30	2
6		Subtest 5	21.30	21.38	21.31	0
8	DC-HSDPA	Subtest 1	21.30	21.37	21.26	0
8		Subtest 2	21.34	21.37	21.32	0
8		Subtest 3	21.35	21.39	21.35	0.5
8		Subtest 4	21.33	21.38	21.33	0.5

FCC ID: BCGA2014	 SAR EVALUATION REPORT			Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device		Page 37 of 195

Table 8-9
Reduced Conducted Power – Antenna 4A

3GPP Release Version	Mode	3GPP 34.121 Subtest	AWS Band [dBm]			PCS Band [dBm]			3GPP MPR [dB]
			1312	1412	1513	9262	9400	9538	
99	WCDMA	12.2 kbps RMC	14.99	15.00	14.93	14.69	14.62	14.65	-
6	HSDPA	Subtest 1	14.70	14.89	14.82	15.13	14.95	15.00	0
6		Subtest 2	14.77	14.82	14.67	15.23	15.05	15.12	0
6		Subtest 3	14.77	14.85	14.70	15.21	15.05	15.11	0.5
6		Subtest 4	14.71	14.79	14.65	15.21	15.06	15.10	0.5
6	HSUPA	Subtest 1	14.76	14.78	14.65	15.22	15.04	15.13	0
6		Subtest 2	14.75	14.78	14.66	15.21	15.06	15.10	2
6		Subtest 3	14.78	14.79	14.69	15.19	15.03	15.11	1
6		Subtest 4	14.80	14.83	14.72	15.20	15.05	15.09	2
6		Subtest 5	14.77	14.78	14.68	15.25	15.09	15.15	0
8	DC-HSDPA	Subtest 1	14.80	14.82	14.74	15.20	15.03	15.11	0
8		Subtest 2	14.78	14.80	14.71	15.24	15.10	15.17	0
8		Subtest 3	14.82	14.83	14.75	15.26	15.12	15.18	0.5
8		Subtest 4	14.79	14.79	14.68	15.23	15.07	15.15	0.5

Table 8-10
Reduced Conducted Power – Antenna 4B

3GPP Release Version	Mode	3GPP 34.121 Subtest	AWS Band [dBm]			PCS Band [dBm]			3GPP MPR [dB]
			1312	1412	1513	9262	9400	9538	
99	WCDMA	12.2 kbps RMC	14.96	14.99	15.00	13.69	13.53	13.59	-
6	HSDPA	Subtest 1	14.72	14.82	14.76	13.50	13.51	13.54	0
6		Subtest 2	14.85	14.95	14.84	13.55	13.51	13.52	0
6		Subtest 3	14.92	14.91	14.84	13.55	13.50	13.57	0.5
6		Subtest 4	14.87	14.92	14.83	13.52	13.50	13.57	0.5
6	HSUPA	Subtest 1	14.89	14.92	14.81	13.52	13.50	13.55	0
6		Subtest 2	14.84	14.90	14.81	13.56	13.50	13.55	2
6		Subtest 3	14.82	14.91	14.81	13.53	13.51	13.53	1
6		Subtest 4	14.86	14.89	14.81	13.51	13.52	13.55	2
6		Subtest 5	14.92	14.96	14.85	13.55	13.50	13.59	0
8	DC-HSDPA	Subtest 1	14.89	14.92	14.82	13.58	13.55	13.54	0
8		Subtest 2	14.91	14.95	14.85	13.51	13.50	13.59	0
8		Subtest 3	14.91	14.94	14.80	13.54	13.51	13.56	0.5
8		Subtest 4	14.80	14.90	14.85	13.55	13.46	13.56	0.5

FCC ID: BCGA2014		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device		Page 38 of 195

Table 8-11
Reduced Conducted Power – Antenna 2A

3GPP Release Version	Mode	3GPP 34.121 Subtest	AWS Band [dBm]			PCS Band [dBm]			3GPP MPR [dB]
			1312	1412	1513	9262	9400	9538	
99	WCDMA	12.2 kbps RMC	14.23	14.17	14.05	14.62	14.47	14.40	-
6	HSDPA	Subtest 1	14.00	14.00	14.01	14.41	14.43	14.40	0
6		Subtest 2	14.13	14.15	14.08	14.62	14.49	14.46	0
6		Subtest 3	14.14	14.13	14.06	14.59	14.50	14.49	0.5
6		Subtest 4	14.12	14.14	14.07	14.49	14.49	14.45	0.5
6	HSUPA	Subtest 1	14.00	14.02	14.04	14.59	14.50	14.47	0
6		Subtest 2	14.11	14.16	14.07	14.63	14.52	14.43	2
6		Subtest 3	14.00	14.01	14.00	14.59	14.60	14.41	1
6		Subtest 4	14.05	14.03	14.02	14.58	14.55	14.47	2
6		Subtest 5	14.11	14.13	14.10	14.61	14.58	14.49	0
8	DC-HSDPA	Subtest 1	14.14	14.12	14.09	14.60	14.47	14.44	0
8		Subtest 2	14.14	14.17	14.07	14.63	14.48	14.40	0
8		Subtest 3	14.19	14.10	14.05	14.61	14.47	14.48	0.5
8		Subtest 4	14.13	14.11	14.08	14.60	14.51	14.52	0.5

Table 8-12
Reduced Conducted Power – Antenna 2B

3GPP Release Version	Mode	3GPP 34.121 Subtest	AWS Band [dBm]			PCS Band [dBm]			3GPP MPR [dB]
			1312	1412	1513	9262	9400	9538	
99	WCDMA	12.2 kbps RMC	14.56	14.57	14.47	14.95	14.87	14.93	-
6	HSDPA	Subtest 1	14.67	14.58	14.78	15.00	15.10	14.89	0
6		Subtest 2	14.90	14.93	14.88	15.11	15.21	15.07	0
6		Subtest 3	14.91	14.92	14.89	15.08	15.17	15.05	0.5
6		Subtest 4	14.89	14.92	14.87	15.10	15.19	15.11	0.5
6	HSUPA	Subtest 1	14.84	14.89	14.85	15.05	15.17	15.01	0
6		Subtest 2	14.83	14.90	14.86	15.11	15.21	15.06	2
6		Subtest 3	14.87	14.91	14.85	15.06	15.15	15.03	1
6		Subtest 4	14.91	14.93	14.89	15.13	15.20	15.12	2
6		Subtest 5	14.92	14.92	14.90	15.09	15.17	15.09	0
8	DC-HSDPA	Subtest 1	14.89	14.93	14.91	15.09	15.15	15.07	0
8		Subtest 2	14.86	14.90	14.85	15.17	15.25	15.13	0
8		Subtest 3	14.87	14.89	14.84	15.14	15.20	15.11	0.5
8		Subtest 4	14.89	14.92	14.90	15.08	15.17	15.09	0.5

FCC ID: BCGA2014		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device		Page 39 of 195

DC-HSDPA considerations

- 3GPP Specification 34.121-1 Release 8 Ver 8.10.0 was used for DC-HSDPA guidance
- H-Set 12 (QPSK) was confirmed to be used during DC-HSDPA measurements
- The DUT supports UE category 24 for HSDPA



Figure 8-2
Power Measurement Setup

FCC ID: BCGA2014	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 40 of 195

8.3 LTE Conducted Powers

8.3.1 LTE Band 71

Table 8-13
LTE Band 71 Reduced Conducted Powers - 20 MHz Bandwidth – Antenna 1

LTE Band 71 20 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			133297 (680.5 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	22.73	0	0
	1	50	22.57		0
	1	99	22.46		0
	50	0	22.72	0-1	0
	50	25	22.56		0
	50	50	22.55		0
	100	0	22.57		0
16QAM	1	0	22.60	0-1	0
	1	50	22.59		0
	1	99	22.52		0
	50	0	21.57	0-2	1
	50	25	21.60		1
	50	50	21.42		1
	100	0	21.60		1
64QAM	1	0	21.60	0-2	1
	1	50	21.57		1
	1	99	21.59		1
	50	0	20.55	0-3	2
	50	25	20.59		2
	50	50	20.43		2
	100	0	20.60		2

Note: LTE Band 71 at 20 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

Table 8-14
LTE Band 71 Reduced Conducted Powers - 15 MHz Bandwidth– Antenna 1

LTE Band 71 15 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			133297 (680.5 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	22.45	0	0
	1	36	22.47		0
	1	74	22.39		0
	36	0	22.50	0-1	0
	36	18	22.45		0
	36	37	22.29		0
	75	0	22.52		0
16QAM	1	0	22.59	0-1	0
	1	36	22.60		0
	1	74	22.55		0
	36	0	21.60	0-2	1
	36	18	21.57		1
	36	37	21.43		1
	75	0	21.60		1
64QAM	1	0	21.60	0-2	1
	1	36	21.60		1
	1	74	21.59		1
	36	0	20.59	0-3	2
	36	18	20.55		2
	36	37	20.42		2
	75	0	20.58		2

Note: LTE Band 71 at 15 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: BCGA2014	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 41 of 195

Table 8-15
LTE Band 71 Reduced Conducted Powers - 10 MHz Bandwidth– Antenna 1

LTE Band 71 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			133172 (668.0 MHz)	133297 (680.5 MHz)	133422 (693.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	22.50	22.58	22.41	0	0
	1	25	22.52	22.44	22.28		0
	1	49	22.40	22.29	22.31		0
	25	0	22.51	22.49	22.36	0-1	0
	25	12	22.48	22.40	22.32		0
	25	25	22.52	22.28	22.24		0
16QAM	50	0	22.49	22.42	22.26	0-1	0
	1	0	22.52	22.60	22.42		0
	1	25	22.54	22.52	22.35		0
	1	49	22.40	22.30	22.31	0-2	0
	25	0	21.60	21.60	21.52		1
	25	12	21.59	21.55	21.48		1
64QAM	25	25	21.60	21.47	21.41	0-2	1
	50	0	21.59	21.57	21.39		1
	1	0	21.49	21.60	21.47		0-2
	1	25	21.55	21.48	21.39	1	
	1	49	21.38	21.33	21.36	1	
	25	0	20.25	20.28	20.16	0-3	2
25	12	20.23	20.21	20.12	2		
25	25	20.28	20.09	20.03	2		
	50	0	20.26	20.20	20.07		2

Table 8-16
LTE Band 71 Reduced Conducted Powers - 5 MHz Bandwidth– Antenna 1

LTE Band 71 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			133147 (665.5 MHz)	133297 (680.5 MHz)	133447 (695.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	22.42	22.52	22.25	0	0
	1	12	22.45	22.43	22.21		0
	1	24	22.47	22.35	22.24		0
	12	0	22.36	22.45	22.17	0-1	0
	12	6	22.40	22.39	22.20		0
	12	13	22.44	22.36	22.22		0
16QAM	25	0	22.46	22.41	22.19	0-1	0
	1	0	22.45	22.55	22.28		0
	1	12	22.51	22.48	22.25		0
	1	24	22.43	22.35	22.27	0-2	0
	12	0	21.54	21.60	21.35		1
	12	6	21.58	21.59	21.34		1
64QAM	12	13	21.60	21.53	21.38	0-2	1
	25	0	21.58	21.57	21.35		1
	1	0	21.57	21.60	21.38		0-2
	1	12	21.60	21.57	21.35	1	
	1	24	21.58	21.48	21.37	1	
	12	0	20.29	20.38	20.13	0-3	2
12	6	20.32	20.34	20.10	2		
12	13	20.38	20.30	20.14	2		
	25	0	20.32	20.33	20.08		2

FCC ID: BCGA2014		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 42 of 195

Table 8-17
LTE Band 71 Reduced Conducted Powers - 20 MHz Bandwidth – Antenna 3

LTE Band 71 20 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			133297 (680.5 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	22.56	0	0
	1	50	22.53		0
	1	99	22.40		0
	50	0	22.57	0-1	0
	50	25	22.56		0
	50	50	22.50		0
16QAM	100	0	22.54	0-1	0
	1	0	22.57		0
	1	50	22.51		0
	1	99	22.52	0-2	0
	50	0	22.19		0
	50	25	22.22		0
	50	50	22.11		0
	100	0	22.32		0
64QAM	1	0	22.57	0-2	0
	1	50	22.53		0
	1	99	22.47		0
	50	0	22.00	0-3	0
	50	25	22.06		0
	50	50	21.96		0
	100	0	22.12		0

Note: LTE Band 71 at 20 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

Table 8-18
LTE Band 71 Reduced Conducted Powers - 15 MHz Bandwidth – Antenna 3

LTE Band 71 15 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			133297 (680.5 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	22.42	0	0
	1	36	22.58		0
	1	74	22.40		0
	36	0	22.50	0-1	0
	36	18	22.53		0
	36	37	22.37		0
16QAM	75	0	22.55	0-1	0
	1	0	22.42		0
	1	36	22.57		0
	1	74	22.47	0-2	0
	36	0	22.32		0
	36	18	22.27		0
	36	37	22.20		0
	75	0	22.30		0
64QAM	1	0	22.42	0-2	0
	1	36	22.52		0
	1	74	22.47		0
	36	0	22.10	0-3	0
	36	18	22.09		0
	36	37	22.00		0
	75	0	22.11		0

Note: LTE Band 71 at 15 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: BCGA2014		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 43 of 195

Table 8-19
LTE Band 71 Reduced Conducted Powers - 10 MHz Bandwidth – Antenna 3

LTE Band 71 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			133172 (668.0 MHz)	133297 (680.5 MHz)	133422 (693.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	22.37	22.57	22.45	0	0
	1	25	22.41	22.52	22.39		0
	1	49	22.40	22.37	22.33		0
	25	0	22.39	22.53	22.41	0-1	0
	25	12	22.40	22.49	22.36		0
	25	25	22.47	22.37	22.30		0
	50	0	22.40	22.50	22.33		0
16QAM	1	0	22.39	22.60	22.50	0-1	0
	1	25	22.35	22.50	22.32		0
	1	49	22.37	22.32	22.40		0
	25	0	22.12	22.30	22.20	0-2	0
	25	12	22.16	22.25	22.15		0
	25	25	22.22	22.14	22.07		0
	50	0	22.17	22.25	22.06		0
64QAM	1	0	22.37	22.60	22.52	0-2	0
	1	25	22.42	22.52	22.32		0
	1	49	22.40	22.42	22.35		0
	25	0	21.95	22.13	22.00	0-3	0
	25	12	21.97	22.07	21.94		0
	25	25	22.05	21.97	21.85		0
	50	0	22.00	22.07	21.87		0

Table 8-20
LTE Band 71 Reduced Conducted Powers - 5 MHz Bandwidth – Antenna 3

LTE Band 71 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			133147 (665.5 MHz)	133297 (680.5 MHz)	133447 (695.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	22.28	22.56	22.30	0	0
	1	12	22.33	22.48	22.35		0
	1	24	22.35	22.37	22.37		0
	12	0	22.24	22.49	22.25	0-1	0
	12	6	22.29	22.45	22.30		0
	12	13	22.32	22.44	22.33		0
	25	0	22.34	22.48	22.31		0
16QAM	1	0	22.32	22.57	22.32	0-1	0
	1	12	22.30	22.52	22.25		0
	1	24	22.34	22.42	22.28		0
	12	0	22.07	22.30	22.00	0-2	0
	12	6	22.09	22.26	22.02		0
	12	13	22.11	22.22	21.98		0
	25	0	22.08	22.25	22.00		0
64QAM	1	0	22.27	22.59	22.32	0-2	0
	1	12	22.31	22.52	22.30		0
	1	24	22.37	22.40	22.27		0
	12	0	21.83	22.10	21.83	0-3	0
	12	6	21.87	22.05	21.86		0
	12	13	21.90	22.02	21.81		0
	25	0	21.87	22.04	21.82		0

FCC ID: BCGA2014		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 44 of 195

8.3.2 LTE Band 12

Table 8-21
LTE Band 12 Reduced Conducted Powers - 10 MHz Bandwidth – Antenna 1

LTE Band 12 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23095 (707.5 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	19.70	0	0
	1	25	19.67		0
	1	49	19.63		0
	25	0	19.65	0-1	0
	25	12	19.64		0
	25	25	19.66		0
16QAM	50	0	19.63	0-1	0
	1	0	19.63		0
	1	25	19.66		0
	1	49	19.69	0-2	0
	25	0	19.40		0
	25	12	19.42		0
64QAM	25	25	19.45	0-2	0
	50	0	19.41		0
	1	0	19.66	0-2	0
	1	25	19.67		0
	1	49	19.70	0-3	0
	25	0	19.40		0
	25	12	19.43		0
	25	25	19.44		0
	50	0	19.42		0

Note: LTE Band 12 at 10 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

Table 8-22
LTE Band 12 Reduced Conducted Powers - 5 MHz Bandwidth– Antenna 1

LTE Band 12 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23035 (701.5 MHz)	23095 (707.5 MHz)	23155 (713.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	19.64	19.57	19.50	0	0
	1	12	19.66	19.56	19.55		0
	1	24	19.67	19.62	19.61		0
	12	0	19.61	19.55	19.58	0-1	0
	12	6	19.66	19.53	19.57		0
	12	13	19.65	19.61	19.57		0
16QAM	25	0	19.69	19.54	19.59	0-1	0
	1	0	19.68	19.61	19.49		0
	1	12	19.68	19.62	19.56		0
	1	24	19.66	19.67	19.61	0-2	0
	12	0	19.43	19.41	19.41		0
	12	6	19.50	19.41	19.38		0
	12	13	19.47	19.47	19.39	0-2	0
	25	0	19.52	19.40	19.39		0
64QAM	1	0	19.67	19.62	19.54	0-2	0
	1	12	19.70	19.65	19.55		0
	1	24	19.70	19.68	19.65		0
	12	0	19.45	19.43	19.42	0-3	0
	12	6	19.53	19.42	19.40		0
	12	13	19.49	19.48	19.41		0
	25	0	19.53	19.40	19.39		0

FCC ID: BCGA2014	 SAR EVALUATION REPORT			Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device		Page 45 of 195

Table 8-23
LTE Band 12 Reduced Conducted Powers - 3 MHz Bandwidth– Antenna 1

LTE Band 12 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23025 (700.5 MHz)	23095 (707.5 MHz)	23165 (714.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	19.58	19.51	19.50	0	0
	1	7	19.62	19.55	19.59		0
	1	14	19.63	19.59	19.56		0
	8	0	19.63	19.55	19.58	0-1	0
	8	4	19.63	19.53	19.58		0
	8	7	19.69	19.62	19.59		0
	15	0	19.63	19.53	19.58		0
16QAM	1	0	19.61	19.55	19.56	0-1	0
	1	7	19.65	19.63	19.60		0
	1	14	19.67	19.61	19.57		0
	8	0	19.44	19.41	19.40	0-2	0
	8	4	19.43	19.38	19.41		0
	8	7	19.49	19.46	19.39		0
	15	0	19.42	19.37	19.38		0
64QAM	1	0	19.61	19.58	19.57	0-2	0
	1	7	19.66	19.61	19.63		0
	1	14	19.67	19.64	19.61		0
	8	0	19.47	19.44	19.43	0-3	0
	8	4	19.47	19.40	19.42		0
	8	7	19.53	19.48	19.44		0
	15	0	19.42	19.38	19.39		0

Table 8-24
LTE Band 12 Reduced Conducted Powers -1.4 MHz Bandwidth– Antenna 1

LTE Band 12 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23017 (699.7 MHz)	23095 (707.5 MHz)	23173 (715.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	19.66	19.55	19.61	0	0
	1	2	19.63	19.53	19.58		0
	1	5	19.66	19.56	19.61		0
	3	0	19.65	19.54	19.60		0
	3	2	19.64	19.53	19.59		0
	3	3	19.66	19.55	19.60		0
	6	0	19.64	19.53	19.60	0-1	0
16QAM	1	0	19.69	19.60	19.62	0-1	0
	1	2	19.62	19.59	19.59		0
	1	5	19.66	19.60	19.60		0
	3	0	19.55	19.50	19.50		0
	3	2	19.55	19.49	19.48		0
	3	3	19.54	19.50	19.49		0
	6	0	19.49	19.43	19.43	0-2	0
64QAM	1	0	19.69	19.63	19.66	0-2	0
	1	2	19.65	19.63	19.61		0
	1	5	19.68	19.64	19.63		0
	3	0	19.57	19.53	19.53		0
	3	2	19.56	19.53	19.53		0
	3	3	19.55	19.54	19.54		0
	6	0	19.47	19.43	19.44	0-3	0

FCC ID: BCGA2014		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 46 of 195

Table 8-25
LTE Band 12 Reduced Conducted Powers - 10 MHz Bandwidth- Antenna 3

LTE Band 12 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23095 (707.5 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	21.69	0	0
	1	25	21.60		0
	1	49	21.62		0
	25	0	21.64	0-1	0
	25	12	21.65		0
	25	25	21.70		0
	50	0	21.67		0
16QAM	1	0	21.68	0-1	0
	1	25	21.55		0
	1	49	21.67		0
	25	0	21.31	0-2	0
	25	12	21.36		0
	25	25	21.38		0
	50	0	21.35		0
64QAM	1	0	21.68	0-2	0
	1	25	21.61		0
	1	49	21.67		0
	25	0	21.32	0-3	0
	25	12	21.36		0
	25	25	21.38		0
	50	0	21.36		0
	50	0	21.36		0

Note: LTE Band 12 at 10 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

Table 8-26
LTE Band 12 Reduced Conducted Powers - 5 MHz Bandwidth- Antenna 3

LTE Band 12 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23035 (701.5 MHz)	23095 (707.5 MHz)	23155 (713.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	21.52	21.43	21.38	0	0
	1	12	21.53	21.44	21.48		0
	1	24	21.61	21.46	21.55		0
	12	0	21.51	21.44	21.47	0-1	0
	12	6	21.59	21.42	21.46		0
	12	13	21.56	21.41	21.48		0
	25	0	21.60	21.44	21.48		0
16QAM	1	0	21.66	21.53	21.47	0-1	0
	1	12	21.70	21.52	21.59		0
	1	24	21.69	21.43	21.68		0
	12	0	21.44	21.33	21.40	0-2	0
	12	6	21.52	21.30	21.38		0
	12	13	21.51	21.29	21.42		0
	25	0	21.52	21.30	21.39		0
64QAM	1	0	21.67	21.52	21.54	0-2	0
	1	12	21.70	21.52	21.63		0
	1	24	21.70	21.55	21.69		0
	12	0	21.46	21.36	21.42	0-3	0
	12	6	21.55	21.32	21.40		0
	12	13	21.51	21.30	21.44		0
	25	0	21.51	21.29	21.40		0

FCC ID: BCGA2014		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 47 of 195

Table 8-27
LTE Band 12 Reduced Conducted Powers - 3 MHz Bandwidth- Antenna 3

LTE Band 12 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23025 (700.5 MHz)	23095 (707.5 MHz)	23165 (714.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	21.45	21.38	21.41	0	0
	1	7	21.52	21.38	21.50		0
	1	14	21.58	21.30	21.47		0
	8	0	21.50	21.39	21.47	0-1	0
	8	4	21.51	21.36	21.48		0
	8	7	21.59	21.35	21.49		0
	15	0	21.49	21.37	21.46		0
16QAM	1	0	21.61	21.61	21.54	0-1	0
	1	7	21.68	21.58	21.62		0
	1	14	21.70	21.48	21.63		0
	8	0	21.43	21.40	21.41	0-2	0
	8	4	21.46	21.36	21.42		0
	8	7	21.53	21.34	21.45		0
	15	0	21.43	21.34	21.38		0
64QAM	1	0	21.60	21.64	21.55	0-2	0
	1	7	21.68	21.59	21.65		0
	1	14	21.70	21.50	21.62		0
	8	0	21.47	21.42	21.42	0-3	0
	8	4	21.49	21.36	21.44		0
	8	7	21.55	21.37	21.44		0
	15	0	21.44	21.35	21.39		0

Table 8-28
LTE Band 12 Reduced Conducted Powers -1.4 MHz Bandwidth- Antenna 3

LTE Band 12 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23017 (699.7 MHz)	23095 (707.5 MHz)	23173 (715.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	21.50	21.40	21.50	0	0
	1	2	21.49	21.38	21.49		0
	1	5	21.53	21.38	21.51		0
	3	0	21.49	21.40	21.49		0
	3	2	21.50	21.37	21.47		0
	3	3	21.52	21.38	21.48		0
	6	0	21.49	21.37	21.47	0-1	0
16QAM	1	0	21.67	21.68	21.68	0-1	0
	1	2	21.63	21.66	21.69		0
	1	5	21.68	21.69	21.67		0
	3	0	21.54	21.54	21.57		0
	3	2	21.55	21.55	21.56		0
	3	3	21.56	21.53	21.58		0
	6	0	21.50	21.47	21.50	0-2	0
64QAM	1	0	21.66	21.69	21.70	0-2	0
	1	2	21.68	21.59	21.69		0
	1	5	21.69	21.69	21.70		0
	3	0	21.57	21.58	21.61		0
	3	2	21.59	21.55	21.60		0
	3	3	21.58	21.58	21.59		0
	6	0	21.48	21.49	21.50	0-3	0

FCC ID: BCGA2014		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 48 of 195

8.3.3 LTE Band 13

Table 8-29
LTE Band 13 Reduced Conducted Powers - 10 MHz Bandwidth- Antenna 1

LTE Band 13 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23230 (782.0 MHz) Conducted Power [dBm]		
QPSK	1	0	23.60	0	0
	1	25	23.43		0
	1	49	23.33		0
	25	0	22.56	0-1	1
	25	12	22.52		1
	25	25	22.46		1
	50	0	22.51		1
16QAM	1	0	22.60	0-1	1
	1	25	22.57		1
	1	49	22.60		1
	25	0	21.14	0-2	2
	25	12	21.22		2
	25	25	21.30		2
	50	0	21.27		2
64QAM	1	0	21.60	0-2	2
	1	25	21.52		2
	1	49	21.59		2
	25	0	20.12	0-3	3
	25	12	20.23		3
	25	25	20.29		3
	50	0	20.28		3

Table 8-30
LTE Band 13 Reduced Conducted Powers - 5 MHz Bandwidth- Antenna 1

LTE Band 13 5 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23230 (782.0 MHz) Conducted Power [dBm]		
QPSK	1	0	23.46	0	0
	1	12	23.51		0
	1	24	23.57		0
	12	0	22.43	0-1	1
	12	6	22.45		1
	12	13	22.46		1
	25	0	22.47		1
16QAM	1	0	22.60	0-1	1
	1	12	22.58		1
	1	24	22.59		1
	12	0	21.32	0-2	2
	12	6	21.38		2
	12	13	21.40		2
	25	0	21.37		2
64QAM	1	0	21.58	0-2	2
	1	12	21.59		2
	1	24	21.60		2
	12	0	20.28	0-3	3
	12	6	20.33		3
	12	13	20.35		3
	25	0	20.33		3

Note: LTE Band 13 at 5 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: BCGA2014	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 49 of 195

Table 8-31
LTE Band 13 Reduced Conducted Powers - 10 MHz Bandwidth- Antenna 3

LTE Band 13 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23230 (782.0 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	22.15	0	0
	1	25	21.97		0
	1	49	22.00		0
	25	0	22.18	0-1	0
	25	12	21.99		0
	25	25	21.96		0
	50	0	22.08		0
16QAM	1	0	22.17	0-1	0
	1	25	22.03		0
	1	49	22.07		0
	25	0	21.68	0-2	0
	25	12	21.53		0
	25	25	21.51		0
	50	0	21.57		0
64QAM	1	0	22.11	0-2	0
	1	25	21.96		0
	1	49	21.91		0
	25	0	21.92	0-3	0
	25	12	21.94		0
	25	25	21.85		0
	50	0	21.90		0

Table 8-32
LTE Band 13 Reduced Conducted Powers - 5 MHz Bandwidth- Antenna 3

LTE Band 13 5 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23230 (782.0 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	22.11	0	0
	1	12	22.04		0
	1	24	22.00		0
	12	0	22.12	0-1	0
	12	6	22.06		0
	12	13	22.03		0
	25	0	22.02		0
16QAM	1	0	22.04	0-1	0
	1	12	21.94		0
	1	24	21.89		0
	12	0	21.78	0-2	0
	12	6	21.73		0
	12	13	21.70		0
	25	0	21.67		0
64QAM	1	0	22.03	0-2	0
	1	12	21.95		0
	1	24	21.88		0
	12	0	21.89	0-3	0
	12	6	21.97		0
	12	13	21.93		0
	25	0	21.89		0

Note: LTE Band 13 at 5 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: BCGA2014		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 50 of 195

8.3.4 LTE Band 14

Table 8-33
LTE Band 14 Reduced Conducted Powers - 10 MHz Bandwidth – Antenna 1

LTE Band 14 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23330 (793.0 MHz) Conducted Power [dBm]		
QPSK	1	0	23.60	0	0
	1	25	23.54		0
	1	49	23.55		0
	25	0	22.58	0-1	1
	25	12	22.51		1
	25	25	22.52		1
	50	0	22.56		1
16QAM	1	0	22.55	0-1	1
	1	25	22.57		1
	1	49	22.60		1
	25	0	21.38	0-2	2
	25	12	21.29		2
	25	25	21.28		2
	50	0	21.29		2
64QAM	1	0	21.54	0-2	2
	1	25	21.58		2
	1	49	21.60		2
	25	0	20.37	0-3	3
	25	12	20.27		3
	25	25	20.26		3
	50	0	20.27		3

Note: LTE Band 14 at 10 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

Table 8-34
LTE Band 14 Reduced Conducted Powers - 5 MHz Bandwidth– Antenna 1

LTE Band 14 5 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23330 (793.0 MHz) Conducted Power [dBm]		
QPSK	1	0	23.60	0	0
	1	12	23.52		0
	1	24	23.51		0
	12	0	22.50	0-1	1
	12	6	22.44		1
	12	13	22.50		1
	25	0	22.45		1
16QAM	1	0	22.60	0-1	1
	1	12	22.56		1
	1	24	22.53		1
	12	0	21.35	0-2	2
	12	6	21.29		2
	12	13	21.37		2
	25	0	21.28		2
64QAM	1	0	21.60	0-2	2
	1	12	21.57		2
	1	24	21.52		2
	12	0	20.35	0-3	3
	12	6	20.28		3
	12	13	20.34		3
	25	0	20.25		3

Note: LTE Band 14 at 5 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: BCGA2014	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 51 of 195

Table 8-35
LTE Band 14 Reduced Conducted Powers - 10 MHz Bandwidth- Antenna 3

LTE Band 14 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23330 (793.0 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	22.18	0	0
	1	25	22.13		0
	1	49	22.12		0
	25	0	22.19	0-1	0
	25	12	22.14		0
	25	25	22.15		0
	50	0	22.16		0
16QAM	1	0	22.19	0-1	0
	1	25	22.15		0
	1	49	22.12		0
	25	0	21.77	0-2	0
	25	12	21.72		0
	25	25	21.72		0
	50	0	21.72		0
64QAM	1	0	22.16	0-2	0
	1	25	22.13		0
	1	49	22.15		0
	25	0	21.90	0-3	0
	25	12	21.87		0
	25	25	21.92		0
	50	0	21.96		0

Note: LTE Band 14 at 10 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

Table 8-36
LTE Band 14 Reduced Conducted Powers - 5 MHz Bandwidth- Antenna 3

LTE Band 14 5 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23330 (793.0 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	22.20	0	0
	1	12	22.17		0
	1	24	22.17		0
	12	0	22.12	0-1	0
	12	6	22.14		0
	12	13	22.15		0
	25	0	22.17		0
16QAM	1	0	22.20	0-1	0
	1	12	22.19		0
	1	24	22.18		0
	12	0	21.77	0-2	0
	12	6	21.82		0
	12	13	21.79		0
	25	0	21.78		0
64QAM	1	0	22.05	0-2	0
	1	12	22.09		0
	1	24	22.06		0
	12	0	21.83	0-3	0
	12	6	21.88		0
	12	13	21.86		0
	25	0	21.95		0

Note: LTE Band 14 at 5 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: BCGA2014		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 52 of 195

8.3.5 LTE Band 5 (Cell)

Table 8-37
LTE Band 5 (Cell) Reduced Conducted Powers - 10 MHz Bandwidth- Antenna 1

LTE Band 5 (Cell) 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20525 (836.5 MHz) Conducted Power [dBm]		
QPSK	1	0	20.69	0	0
	1	25	20.75		0
	1	49	20.79		0
	25	0	20.80	0-1	0
	25	12	20.76		0
	25	25	20.74		0
	50	0	20.77		0
16QAM	1	0	20.62	0-1	0
	1	25	20.70		0
	1	49	20.80		0
	25	0	20.61	0-2	0
	25	12	20.68		0
	25	25	20.75		0
	50	0	20.72		0
64QAM	1	0	20.55	0-2	0
	1	25	20.64		0
	1	49	20.68		0
	25	0	20.18	0-3	0
	25	12	20.16		0
	25	25	20.14		0
	50	0	20.18		0

Note: LTE Band 5 (Cell) at 10 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

Table 8-38
LTE Band 5 (Cell) Reduced Conducted Powers - 5 MHz Bandwidth- Antenna 1

LTE Band 5 (Cell) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20425 (826.5 MHz)	20525 (836.5 MHz)	20625 (846.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	20.58	20.55	20.75	0	0
	1	12	20.48	20.61	20.74		0
	1	24	20.39	20.72	20.66		0
	12	0	20.59	20.63	20.71	0-1	0
	12	6	20.57	20.67	20.65		0
	12	13	20.56	20.74	20.61		0
	25	0	20.59	20.67	20.66		0
16QAM	1	0	20.78	20.76	20.76	0-1	0
	1	12	20.65	20.77	20.79		0
	1	24	20.54	20.80	20.69		0
	12	0	20.49	20.52	20.66	0-2	0
	12	6	20.47	20.58	20.59		0
	12	13	20.44	20.63	20.55		0
	25	0	20.46	20.58	20.55		0
64QAM	1	0	20.60	20.70	20.66	0-2	0
	1	12	20.56	20.68	20.70		0
	1	24	20.54	20.62	20.69		0
	12	0	20.00	20.23	20.14	0-3	0
	12	6	19.99	20.24	20.11		0
	12	13	19.98	20.24	20.17		0
	25	0	19.98	20.23	20.10		0

FCC ID: BCGA2014	 SAR EVALUATION REPORT			Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device		Page 53 of 195

Table 8-39
LTE Band 5 (Cell) Reduced Conducted Powers - 3 MHz Bandwidth- Antenna 1

LTE Band 5 (Cell) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20415 (825.5 MHz)	20525 (836.5 MHz)	20635 (847.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	20.58	20.50	20.61	0	0
	1	7	20.56	20.59	20.64		0
	1	14	20.48	20.61	20.51		0
	8	0	20.69	20.62	20.67	0-1	0
	8	4	20.62	20.66	20.64		0
	8	7	20.61	20.73	20.63		0
	15	0	20.60	20.66	20.64		0
16QAM	1	0	20.69	20.59	20.71	0-1	0
	1	7	20.74	20.75	20.76		0
	1	14	20.61	20.71	20.64		0
	8	0	20.54	20.48	20.51	0-2	0
	8	4	20.52	20.53	20.49		0
	8	7	20.49	20.59	20.48		0
	15	0	20.45	20.52	20.46		0
64QAM	1	0	20.53	20.62	20.68	0-2	0
	1	7	20.59	20.70	20.70		0
	1	14	20.50	20.68	20.66		0
	8	0	20.02	20.15	20.17	0-3	0
	8	4	20.00	20.16	20.16		0
	8	7	20.00	20.17	20.17		0
	15	0	19.97	20.12	20.13		0

Table 8-40
LTE Band 5 (Cell) Reduced Conducted Powers -1.4 MHz Bandwidth- Antenna 1

LTE Band 5 (Cell) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20407 (824.7 MHz)	20525 (836.5 MHz)	20643 (848.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	20.80	20.62	20.57	0	0
	1	2	20.79	20.61	20.55		0
	1	5	20.76	20.63	20.50		0
	3	0	20.71	20.70	20.64		0
	3	2	20.72	20.69	20.63		0
	3	3	20.71	20.70	20.55		0
	6	0	20.70	20.68	20.60	0-1	0
16QAM	1	0	20.74	20.77	20.71	0-1	0
	1	2	20.71	20.79	20.68		0
	1	5	20.78	20.80	20.65		0
	3	0	20.62	20.64	20.53		0
	3	2	20.63	20.59	20.49		0
	3	3	20.65	20.65	20.47		0
	6	0	20.59	20.53	20.52	0-2	0
64QAM	1	0	20.62	20.70	20.70	0-2	0
	1	2	20.60	20.69	20.68		0
	1	5	20.58	20.70	20.67		0
	3	0	20.50	20.65	20.62		0
	3	2	20.49	20.63	20.60		0
	3	3	20.49	20.66	20.63		0
	6	0	20.03	20.18	20.14	0-3	0

FCC ID: BCGA2014		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 54 of 195

Table 8-41
LTE Band 5 (Cell) Reduced Conducted Powers - 10 MHz Bandwidth- Antenna 3

LTE Band 5 (Cell) 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20525 (836.5 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	21.23	0	0
	1	25	21.22		0
	1	49	21.38		0
	25	0	21.26	0-1	0
	25	12	21.28		0
	25	25	21.37		0
16QAM	50	0	21.33	0-1	0
	1	0	21.25		0
	1	25	21.30		0
	1	49	21.40	0-2	0
	25	0	21.00		0
	25	12	21.05		0
64QAM	25	25	21.11	0-2	0
	50	0	21.05		0
	1	0	21.36	0-2	0
	1	25	21.35		0
	1	49	21.39		0
	25	0	21.21	0-3	0
64QAM	25	12	21.20		0
	25	25	21.18		0
	50	0	21.21		0

Note: LTE Band 5 (Cell) at 10 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

Table 8-42
LTE Band 5 (Cell) Reduced Conducted Powers - 5 MHz Bandwidth- Antenna 3

LTE Band 5 (Cell) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20425 (826.5 MHz)	20525 (836.5 MHz)	20625 (846.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	21.35	21.37	21.40	0	0
	1	12	21.26	21.33	21.38		0
	1	24	21.27	21.40	21.35		0
	12	0	21.30	21.29	21.36	0-1	0
	12	6	21.28	21.33	21.21		0
	12	13	21.26	21.40	21.37		0
	25	0	21.29	21.32	21.32		0
16QAM	1	0	21.28	21.37	21.38	0-1	0
	1	12	21.17	21.37	21.40		0
	1	24	21.15	21.39	21.40		0
	12	0	20.97	20.96	21.15	0-2	0
	12	6	20.96	21.04	21.10		0
	12	13	20.95	21.11	21.05		0
	25	0	20.95	21.00	21.09		0
64QAM	1	0	21.31	21.40	21.38	0-2	0
	1	12	21.27	21.37	21.38		0
	1	24	21.35	21.39	21.37		0
	12	0	21.08	21.18	21.21	0-3	0
	12	6	21.08	21.19	21.20		0
	12	13	21.06	21.18	21.20		0
	25	0	21.06	21.17	21.19		0

FCC ID: BCGA2014		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device		Page 55 of 195

Table 8-43
LTE Band 5 (Cell) Reduced Conducted Powers - 3 MHz Bandwidth- Antenna 3

LTE Band 5 (Cell) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20415 (825.5 MHz)	20525 (836.5 MHz)	20635 (847.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	21.28	21.37	21.35	0	0
	1	7	21.31	21.35	21.40		0
	1	14	21.24	21.38	21.36		0
	8	0	21.31	21.34	21.40	0-1	0
	8	4	21.30	21.34	21.34		0
	8	7	21.30	21.36	21.38		0
	15	0	21.29	21.31	21.35		0
16QAM	1	0	21.20	21.39	21.33	0-1	0
	1	7	21.25	21.40	21.38		0
	1	14	21.18	21.38	21.29		0
	8	0	21.08	21.21	21.17	0-2	0
	8	4	21.06	21.20	21.16		0
	8	7	21.07	21.21	21.17		0
	15	0	21.04	21.18	21.15		0
64QAM	1	0	21.26	21.25	21.40	0-2	0
	1	7	21.33	21.30	21.40		0
	1	14	21.21	21.22	21.37		0
	8	0	21.10	21.10	21.22	0-3	0
	8	4	21.10	21.09	21.20		0
	8	7	21.09	21.07	21.19		0
	15	0	20.75	21.05	21.16		0

Table 8-44
LTE Band 5 (Cell) Reduced Conducted Powers -1.4 MHz Bandwidth- Antenna 3

LTE Band 5 (Cell) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20407 (824.7 MHz)	20525 (836.5 MHz)	20643 (848.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	21.26	21.36	21.40	0	0
	1	2	21.25	21.35	21.38		0
	1	5	21.24	21.38	21.33		0
	3	0	21.26	21.37	21.39		0
	3	2	21.25	21.36	21.37		0
	3	3	21.25	21.38	21.32		0
	6	0	21.26	21.36	21.37	0-1	0
16QAM	1	0	21.21	21.30	21.34	0-1	0
	1	2	21.18	21.28	21.33		0
	1	5	21.20	21.31	21.27		0
	3	0	21.09	21.20	21.20		0
	3	2	21.08	21.18	21.20		0
	3	3	21.08	21.18	21.15		0
	6	0	21.04	21.14	21.13	0-2	0
64QAM	1	0	21.22	21.35	21.38	0-2	0
	1	2	21.24	21.33	21.37		0
	1	5	21.22	21.36	21.35		0
	3	0	21.12	21.24	21.28		0
	3	2	21.11	21.23	21.25		0
	3	3	21.14	21.27	21.19		0
	6	0	21.05	21.16	21.14	0-3	0

FCC ID: BCGA2014		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 56 of 195

8.3.6 LTE Band 26 (Cell)

Table 8-45
LTE Band 26 (Cell) Reduced Conducted Powers - 10 MHz Bandwidth- Antenna 1

LTE Band 26 (Cell) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26740 (819.0 MHz)	26865 (831.5 MHz)	26990 (844.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	20.61	20.39	20.54	0	0
	1	25	20.52	20.43	20.51		0
	1	49	20.41	20.52	20.57		0
	25	0	20.47	20.33	20.50	0-1	0
	25	12	20.48	20.43	20.46		0
	25	25	20.55	20.47	20.54		0
16QAM	50	0	20.50	20.46	20.49	0	
	1	0	20.59	20.36	20.47	0-1	0
	1	25	20.44	20.21	20.39		0
	1	49	20.51	20.31	20.27		0
	25	0	20.13	19.99	20.22	0-2	0
	25	12	20.11	20.10	20.08		0
25	25	20.22	20.00	20.13	0		
64QAM	50	0	20.21	20.05	20.12	0	
	1	0	20.27	20.06	20.28	0-2	0
	1	25	20.23	20.15	20.17		0
	1	49	20.18	20.28	20.25		0
	25	0	19.94	19.82	20.04	0-3	0
	25	12	19.98	19.94	19.92		0
25	25	19.99	19.97	19.98	0		
	50	0	19.97	19.95	19.95	0	

Table 8-46
LTE Band 26 (Cell) Reduced Conducted Powers - 5 MHz Bandwidth- Antenna 1

LTE Band 26 (Cell) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26715 (816.5 MHz)	26865 (831.5 MHz)	27015 (846.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	20.36	20.09	20.36	0	0
	1	12	20.17	20.17	20.34		0
	1	24	20.20	20.17	20.27		0
	12	0	20.34	20.07	20.29	0-1	0
	12	6	20.26	20.11	20.26		0
	12	13	20.27	20.08	20.20		0
	25	0	20.28	20.14	20.25		0
16QAM	1	0	20.57	20.08	20.31	0-1	0
	1	12	20.34	20.13	20.27		0
	1	24	20.42	20.11	20.23		0
	12	0	20.24	20.00	20.18	0-2	0
	12	6	20.19	20.01	20.15		0
	12	13	20.17	20.03	20.11		0
	25	0	20.16	19.99	20.13		0
64QAM	1	0	20.29	20.00	20.18	0-2	0
	1	12	20.19	20.10	20.23		0
	1	24	20.25	20.17	20.16		0
	12	0	20.04	19.86	20.02	0-3	0
	12	6	19.98	19.92	19.99		0
	12	13	19.99	19.96	20.03		0
	25	0	19.95	19.91	19.98		0

FCC ID: BCGA2014		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device		Page 57 of 195

Table 8-47
LTE Band 26 (Cell) Reduced Conducted Powers - 3 MHz Bandwidth- Antenna 1

LTE Band 26 (Cell) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26705 (815.5 MHz)	26865 (831.5 MHz)	27025 (847.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	20.32	19.97	20.17	0	0
	1	7	20.27	20.07	20.20		0
	1	14	20.14	20.00	20.10		0
	8	0	20.34	20.06	20.23	0-1	0
	8	4	20.31	20.12	20.21		0
	8	7	20.28	20.11	20.19		0
	15	0	20.31	20.13	20.20		0
16QAM	1	0	20.60	20.18	20.47	0-1	0
	1	7	20.52	20.23	20.37		0
	1	14	20.45	20.11	20.19		0
	8	0	20.29	20.01	20.15	0-2	0
	8	4	20.23	20.04	20.13		0
	8	7	20.19	20.03	20.11		0
	15	0	20.21	19.98	20.12		0
64QAM	1	0	20.23	20.01	20.14	0-2	0
	1	7	20.28	20.08	20.28		0
	1	14	20.17	20.11	20.12		0
	8	0	20.04	19.86	19.99	0-3	0
	8	4	20.03	19.90	20.06		0
	8	7	20.02	19.89	19.98		0
	15	0	20.01	19.87	20.01		0

Table 8-48
LTE Band 26 (Cell) Reduced Conducted Powers -1.4 MHz Bandwidth- Antenna 1

LTE Band 26 (Cell) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26697 (814.7 MHz)	26865 (831.5 MHz)	27033 (848.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	20.54	20.11	20.15	0	0
	1	2	20.51	20.09	20.13		0
	1	5	20.44	20.08	20.11		0
	3	0	20.41	20.17	20.21		0
	3	2	20.32	20.15	20.20		0
	3	3	20.31	20.16	20.16		0
	6	0	20.30	20.14	20.18	0-1	0
16QAM	1	0	20.61	20.31	20.37	0-1	0
	1	2	20.47	20.30	20.37		0
	1	5	20.58	20.38	20.31		0
	3	0	20.39	20.09	20.18		0
	3	2	20.27	20.15	20.16		0
	3	3	20.31	20.05	20.12		0
	6	0	20.25	20.01	20.11	0-2	0
64QAM	1	0	20.26	20.12	20.23	0-2	0
	1	2	20.25	20.11	20.21		0
	1	5	20.28	20.13	20.20		0
	3	0	20.16	20.01	20.13		0
	3	2	20.14	20.01	20.10		0
	3	3	20.16	20.00	20.12		0
	6	0	20.06	19.93	19.98	0-3	0

FCC ID: BCGA2014		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 58 of 195

Table 8-49
LTE Band 26 (Cell) Reduced Conducted Powers - 10 MHz Bandwidth – Antenna 3

LTE Band 26 (Cell) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26740 (819.0 MHz)	26865 (831.5 MHz)	26990 (844.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	21.36	21.04	21.19	0	0
	1	25	21.24	21.11	21.13		0
	1	49	21.21	21.18	21.08		0
	25	0	21.25	21.11	21.28	0-1	0
	25	12	21.23	21.16	21.17		0
	25	25	21.35	21.11	21.19		0
16QAM	50	0	21.34	21.13	21.15	0-1	0
	1	0	21.27	21.12	21.22		0
	1	25	21.23	21.13	21.18		0
	1	49	21.21	21.24	21.19	0-2	0
	25	0	21.00	20.94	21.00		0
	25	12	21.03	20.96	20.96		0
64QAM	25	25	21.04	20.95	20.99	0-2	0
	50	0	21.04	20.98	20.98		0
	1	0	21.30	21.14	21.23	0-2	0
	1	25	21.29	21.19	21.18		0
	1	49	21.23	21.25	21.25	0-3	0
	25	0	21.01	20.95	21.01		0
	25	12	21.04	20.98	20.98		0
	25	25	21.06	20.97	21.00		0
	50	0	21.05	20.99	20.99		0

Table 8-50
LTE Band 26 (Cell) Reduced Conducted Powers - 5 MHz Bandwidth– Antenna 3

LTE Band 26 (Cell) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26715 (816.5 MHz)	26865 (831.5 MHz)	27015 (846.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	21.37	21.18	21.29	0	0
	1	12	21.29	21.21	21.34		0
	1	24	21.32	21.23	21.29		0
	12	0	21.34	21.14	21.31	0-1	0
	12	6	21.27	21.21	21.30		0
	12	13	21.28	21.21	21.30		0
	25	0	21.28	21.22	21.32		0
16QAM	1	0	21.25	21.11	21.14	0-1	0
	1	12	21.23	21.10	21.21		0
	1	24	21.25	21.15	21.18		0
	12	0	21.07	20.90	21.03	0-2	0
	12	6	21.03	20.95	21.00		0
	12	13	21.04	20.94	20.98		0
	25	0	21.02	20.94	21.01		0
64QAM	1	0	21.33	21.15	21.24	0-2	0
	1	12	21.28	21.19	21.30		0
	1	24	21.31	21.17	21.23		0
	12	0	21.07	20.94	21.06	0-3	0
	12	6	21.04	20.97	21.04		0
	12	13	21.06	20.96	21.03		0
	25	0	21.03	20.95	21.03		0

FCC ID: BCGA2014		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device		Page 59 of 195

Table 8-51
LTE Band 26 (Cell) Reduced Conducted Powers - 3 MHz Bandwidth– Antenna 3

LTE Band 26 (Cell) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26705 (815.5 MHz)	26865 (831.5 MHz)	27025 (847.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	21.33	21.10	21.27	0	0
	1	7	21.38	21.21	21.33		0
	1	14	21.26	21.16	21.21		0
	8	0	21.37	21.15	21.29	0-1	0
	8	4	21.36	21.20	21.28		0
	8	7	21.30	21.21	21.29		0
	15	0	21.36	21.20	21.28		0
16QAM	1	0	21.24	21.06	21.02	0-1	0
	1	7	21.30	21.14	21.09		0
	1	14	21.23	21.10	21.08		0
	8	0	21.11	20.91	20.91	0-2	0
	8	4	21.09	20.95	20.93		0
	8	7	21.07	20.98	20.94		0
	15	0	21.08	20.94	20.90		0
64QAM	1	0	21.32	21.12	21.10	0-2	0
	1	7	21.34	21.24	21.20		0
	1	14	21.26	21.10	21.11		0
	8	0	21.11	20.95	20.92	0-3	0
	8	4	21.13	20.99	20.95		0
	8	7	21.10	21.01	20.96		0
	15	0	21.08	20.97	20.93		0

Table 8-52
LTE Band 26 (Cell) Reduced Conducted Powers -1.4 MHz Bandwidth– Antenna 3

LTE Band 26 (Cell) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26697 (814.7 MHz)	26865 (831.5 MHz)	27033 (848.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	21.38	21.22	21.34	0	0
	1	2	21.37	21.19	21.31		0
	1	5	21.38	21.22	21.26		0
	3	0	21.37	21.22	21.32		0
	3	2	21.37	21.21	21.30		0
	3	3	21.38	21.21	21.24		0
	6	0	21.36	21.20	21.30	0-1	0
16QAM	1	0	21.32	21.18	21.27	0-1	0
	1	2	21.34	21.12	21.25		0
	1	5	21.32	21.17	21.22		0
	3	0	21.20	21.07	21.14		0
	3	2	21.22	21.06	21.12		0
	3	3	21.23	21.08	21.07		0
	6	0	21.16	21.01	21.05	0-2	0
64QAM	1	0	21.36	21.24	21.34	0-2	0
	1	2	21.34	21.21	21.32		0
	1	5	21.36	21.23	21.27		0
	3	0	21.25	21.11	21.19		0
	3	2	21.26	21.10	21.17		0
	3	3	21.25	21.11	21.12		0
	6	0	21.40	21.35	21.38	0-3	0

FCC ID: BCGA2014		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 60 of 195

8.3.7 LTE Band 4 (AWS)

Table 8-53
LTE Band 4 (AWS) Reduced Conducted Powers - 20 MHz Bandwidth- Antenna 2A

LTE Band 4 (AWS) 20 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20175 (1732.5 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	14.99	0	0
	1	50	14.95		0
	1	99	14.95		0
	50	0	14.85	0-1	0
	50	25	14.88		0
	50	50	14.84		0
	100	0	14.87		0
16QAM	1	0	14.99	0-1	0
	1	50	14.96		0
	1	99	14.93		0
	50	0	14.61	0-2	0
	50	25	14.64		0
	50	50	14.59		0
	100	0	14.70		0
64QAM	1	0	14.97	0-2	0
	1	50	14.95		0
	1	99	14.92		0
	50	0	14.60	0-3	0
	50	25	14.63		0
	50	50	14.60		0
	100	0	14.70		0

Note: LTE Band 4 at 20 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

Table 8-54
LTE Band 4 (AWS) Reduced Conducted Powers - 15 MHz Bandwidth- Antenna 2A

LTE Band 4 (AWS) 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20025 (1717.5 MHz)	20175 (1732.5 MHz)	20325 (1747.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.96	15.00	14.99	0	0
	1	36	14.97	14.99	14.98		0
	1	74	14.93	14.92	14.93		0
	36	0	14.96	14.93	14.97	0-1	0
	36	18	14.98	14.97	14.98		0
	36	37	14.97	14.95	14.94		0
	75	0	15.00	14.97	14.98		0
16QAM	1	0	14.91	15.00	14.95	0-1	0
	1	36	14.95	14.99	14.98		0
	1	74	14.91	14.89	14.91		0
	36	0	14.72	14.69	14.71	0-2	0
	36	18	14.71	14.74	14.73		0
	36	37	14.73	14.70	14.71		0
	75	0	14.74	14.75	14.72		0
64QAM	1	0	14.97	15.00	15.00	0-2	0
	1	36	15.00	14.96	14.99		0
	1	74	14.98	14.92	14.96		0
	36	0	14.72	14.70	14.74	0-3	0
	36	18	14.74	14.75	14.75		0
	36	37	14.77	14.73	14.72		0
	75	0	14.76	14.77	14.74		0

FCC ID: BCGA2014	 SAR EVALUATION REPORT			Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device		Page 61 of 195

Table 8-55
LTE Band 4 (AWS) Reduced Conducted Powers - 10 MHz Bandwidth- Antenna 2A

LTE Band 4 (AWS) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20000 (1715.0 MHz)	20175 (1732.5 MHz)	20350 (1750.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.97	15.00	14.99	0	0
	1	25	14.99	14.99	15.00		0
	1	49	15.00	14.94	14.97		0
	25	0	14.97	15.00	14.97	0-1	0
	25	12	14.97	14.98	14.96		0
	25	25	14.99	14.97	14.95		0
	50	0	14.98	14.98	14.99		0
16QAM	1	0	14.94	14.99	15.00	0-1	0
	1	25	14.98	15.00	14.98		0
	1	49	15.00	14.94	14.95		0
	25	0	14.71	14.77	14.73	0-2	0
	25	12	14.70	14.74	14.71		0
	25	25	14.72	14.71	14.70		0
	50	0	14.72	14.73	14.72		0
64QAM	1	0	14.96	15.00	15.00	0-2	0
	1	25	14.99	15.00	15.00		0
	1	49	15.00	14.96	14.99		0
	25	0	14.72	14.78	14.74	0-3	0
	25	12	14.71	14.76	14.71		0
	25	25	14.74	14.73	14.70		0
	50	0	14.73	14.75	14.71		0

Table 8-56
LTE Band 4 (AWS) Reduced Conducted Powers - 5 MHz Bandwidth- Antenna 2A

LTE Band 4 (AWS) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			19975 (1712.5 MHz)	20175 (1732.5 MHz)	20375 (1752.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.93	15.00	14.93	0	0
	1	12	14.92	14.99	14.86		0
	1	24	14.98	14.96	14.88		0
	12	0	14.92	14.99	14.86	0-1	0
	12	6	14.91	14.97	14.85		0
	12	13	14.94	14.95	14.86		0
	25	0	14.92	14.94	14.88		0
16QAM	1	0	14.96	15.00	15.00	0-1	0
	1	12	14.95	14.99	14.95		0
	1	24	14.98	15.00	14.93		0
	12	0	14.71	14.79	14.70	0-2	0
	12	6	14.72	14.76	14.66		0
	12	13	14.70	14.77	14.67		0
	25	0	14.69	14.76	14.65		0
64QAM	1	0	14.95	15.00	14.98	0-2	0
	1	12	14.96	14.99	14.96		0
	1	24	14.99	15.00	14.97		0
	12	0	14.72	14.79	14.69	0-3	0
	12	6	14.70	14.76	14.65		0
	12	13	14.73	14.77	14.67		0
	25	0	14.71	14.75	14.64		0

FCC ID: BCGA2014	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device		Page 62 of 195

Table 8-57
LTE Band 4 (AWS) Reduced Conducted Powers - 3 MHz Bandwidth- Antenna 2A

LTE Band 4 (AWS) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			19965 (1711.5 MHz)	20175 (1732.5 MHz)	20385 (1753.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.92	14.99	14.90	0	0
	1	7	14.99	15.00	14.95		0
	1	14	14.93	14.98	14.91		0
	8	0	14.97	15.00	14.96	0-1	0
	8	4	14.98	14.99	14.94		0
	8	7	14.98	14.97	14.95		0
	15	0	14.96	14.99	14.93		0
16QAM	1	0	14.90	15.00	14.98	0-1	0
	1	7	14.97	14.99	14.97		0
	1	14	14.92	14.97	14.95		0
	8	0	14.81	14.90	14.80	0-2	0
	8	4	14.79	14.87	14.77		0
	8	7	14.77	14.85	14.79		0
	15	0	14.75	14.86	14.76		0
64QAM	1	0	14.95	15.00	14.92	0-2	0
	1	7	14.99	14.99	14.97		0
	1	14	14.92	14.97	14.94		0
	8	0	14.74	14.85	14.72	0-3	0
	8	4	14.77	14.81	14.69		0
	8	7	14.76	14.82	14.76		0
	15	0	14.71	14.80	14.72		0

Table 8-58
LTE Band 4 (AWS) Reduced Conducted Powers – 1.4 MHz Bandwidth- Antenna 2A

LTE Band 4 (AWS) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			19957 (1710.7 MHz)	20175 (1732.5 MHz)	20393 (1754.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.92	14.99	14.89	0	0
	1	2	14.88	14.98	14.87		0
	1	5	14.93	14.96	14.90		0
	3	0	14.91	15.00	14.88		0
	3	2	14.90	14.99	14.91		0
	3	3	14.92	14.98	14.92		0
	6	0	14.89	14.99	14.87	0-1	0
16QAM	1	0	14.88	15.00	14.93	0-1	0
	1	2	14.91	14.99	14.89		0
	1	5	14.95	14.97	14.94		0
	3	0	14.80	14.91	14.78		0
	3	2	14.82	14.93	14.80		0
	3	3	14.80	14.90	14.83		0
	6	0	14.76	14.85	14.74	0-2	0
64QAM	1	0	14.95	15.00	14.97	0-2	0
	1	2	14.93	14.99	14.93		0
	1	5	14.98	14.98	14.96		0
	3	0	14.81	14.95	14.83		0
	3	2	14.83	14.93	14.86		0
	3	3	14.81	14.89	14.84		0
	6	0	14.72	14.85	14.75	0-3	0

FCC ID: BCGA2014		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 63 of 195

8.3.8 LTE Band 66 (AWS)

Table 8-59
LTE Band 66 (AWS) Reduced Conducted Powers - 20 MHz Bandwidth- Antenna 4A

LTE Band 66 (AWS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132072 (1720.0 MHz)	132322 (1745.0 MHz)	132572 (1770.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.82	14.93	14.74	0	0
	1	50	14.80	14.87	14.61		0
	1	99	14.69	14.86	14.60		0
	50	0	14.87	14.88	14.60	0-1	0
	50	25	14.82	14.77	14.61		0
	50	50	14.85	14.80	14.66		0
	100	0	14.86	14.71	14.65		0
16QAM	1	0	14.99	14.96	14.95	0-1	0
	1	50	14.97	14.99	14.94		0
	1	99	14.97	14.94	14.96		0
	50	0	14.80	14.77	14.80	0-2	0
	50	25	14.81	14.80	14.89		0
	50	50	14.77	14.79	14.90		0
	100	0	14.89	14.83	14.95		0
64QAM	1	0	14.94	14.96	14.95	0-2	0
	1	50	14.96	14.98	14.94		0
	1	99	14.97	14.99	14.95		0
	50	0	14.87	14.84	14.83	0-3	0
	50	25	14.88	14.89	14.85		0
	50	50	14.89	14.86	14.88		0
	100	0	14.95	14.95	14.92		0

Table 8-60
LTE Band 66 (AWS) Reduced Conducted Powers - 15 MHz Bandwidth- Antenna 4A

LTE Band 66 (AWS) 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132047 (1717.5 MHz)	132322 (1745.0 MHz)	132597 (1772.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.85	14.79	14.90	0	0
	1	36	14.84	14.80	14.92		0
	1	74	14.83	14.80	14.83		0
	36	0	14.81	14.78	14.86	0-1	0
	36	18	14.87	14.80	14.86		0
	36	37	14.86	14.78	14.86		0
	75	0	14.88	14.81	14.93		0
16QAM	1	0	14.97	14.96	14.97	0-1	0
	1	36	14.98	14.98	14.98		0
	1	74	14.95	14.97	14.97		0
	36	0	14.81	14.74	14.86	0-2	0
	36	18	14.86	14.79	14.85		0
	36	37	14.85	14.78	14.88		0
	75	0	14.86	14.80	14.92		0
64QAM	1	0	14.96	14.95	14.92	0-2	0
	1	36	14.97	14.98	14.93		0
	1	74	14.95	14.99	14.95		0
	36	0	14.81	14.88	14.84	0-3	0
	36	18	14.85	14.90	14.82		0
	36	37	14.89	14.86	14.77		0
	75	0	14.92	14.91	14.84		0

FCC ID: BCGA2014	 SAR EVALUATION REPORT			Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device		Page 64 of 195

Table 8-61
LTE Band 66 (AWS) Reduced Conducted Powers - 10 MHz Bandwidth- Antenna 4A

LTE Band 66 (AWS) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132022 (1715.0 MHz)	132322 (1745.0 MHz)	132622 (1775.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.88	14.83	14.96	0	0
	1	25	14.85	14.82	14.91		0
	1	49	14.94	14.82	14.88		0
	25	0	14.82	14.79	14.84	0-1	0
	25	12	14.82	14.80	14.84		0
	25	25	14.85	14.82	14.86		0
	50	0	14.78	14.81	14.86		0
16QAM	1	0	14.98	14.98	14.99	0-1	0
	1	25	14.97	14.99	14.96		0
	1	49	14.99	14.96	14.94		0
	25	0	14.81	14.80	14.87	0-2	0
	25	12	14.82	14.84	14.83		0
	25	25	14.85	14.83	14.87		0
	50	0	14.86	14.84	14.88		0
64QAM	1	0	14.94	14.93	14.92	0-2	0
	1	25	14.96	14.95	14.94		0
	1	49	14.98	14.94	14.93		0
	25	0	14.78	14.79	14.81	0-3	0
	25	12	14.78	14.82	14.80		0
	25	25	14.84	14.84	14.83		0
	50	0	14.83	14.82	14.85		0

Table 8-62
LTE Band 66 (AWS) Reduced Conducted Powers - 5 MHz Bandwidth- Antenna 4A

LTE Band 66 (AWS) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			131997 (1712.5 MHz)	132322 (1745.0 MHz)	132647 (1777.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.88	14.81	14.97	0	0
	1	12	14.87	14.80	14.98		0
	1	24	14.92	14.89	14.96		0
	12	0	14.84	14.78	14.90	0-1	0
	12	6	14.86	14.75	14.93		0
	12	13	14.87	14.79	14.88		0
	25	0	14.86	14.78	14.93		0
16QAM	1	0	14.94	14.96	14.97	0-1	0
	1	12	14.93	14.97	14.98		0
	1	24	14.96	14.98	14.99		0
	12	0	14.81	14.80	14.92	0-2	0
	12	6	14.81	14.83	14.93		0
	12	13	14.85	14.84	14.91		0
	25	0	14.84	14.76	14.95		0
64QAM	1	0	14.95	14.91	14.98	0-2	0
	1	12	14.93	14.97	14.94		0
	1	24	14.94	14.96	14.95		0
	12	0	14.83	14.86	14.84	0-3	0
	12	6	14.82	14.85	14.88		0
	12	13	14.74	14.87	14.83		0
	25	0	14.84	14.87	14.88		0

FCC ID: BCGA2014		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device		Page 65 of 195

Table 8-63
LTE Band 66 (AWS) Reduced Conducted Powers - 3 MHz Bandwidth- Antenna 4A

LTE Band 66 (AWS) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			131987 (1711.5 MHz)	132322 (1745.0 MHz)	132657 (1778.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.82	14.80	14.94	0	0
	1	7	14.89	14.78	14.93		0
	1	14	14.83	14.81	14.85		0
	8	0	14.85	14.83	14.97	0-1	0
	8	4	14.84	14.81	14.89		0
	8	7	14.85	14.82	14.88		0
	15	0	14.86	14.81	14.89		0
16QAM	1	0	14.93	14.92	14.99	0-1	0
	1	7	14.98	14.98	14.98		0
	1	14	14.97	14.97	14.95		0
	8	0	14.88	14.87	14.92	0-2	0
	8	4	14.86	14.84	14.91		0
	8	7	14.88	14.86	14.92		0
	15	0	14.87	14.80	14.94		0
64QAM	1	0	14.92	14.95	14.97	0-2	0
	1	7	14.91	14.94	14.96		0
	1	14	14.95	14.96	14.94		0
	8	0	14.86	14.87	14.96	0-3	0
	8	4	14.84	14.91	14.88		0
	8	7	14.85	14.92	14.87		0
	15	0	14.82	14.90	14.71		0

Table 8-64
LTE Band 66 (AWS) Reduced Conducted Powers -1.4 MHz Bandwidth- Antenna 4A

LTE Band 66 (AWS) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			131979 (1710.7 MHz)	132322 (1745.0 MHz)	132665 (1779.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.89	14.85	14.90	0	0
	1	2	14.87	14.82	14.88		0
	1	5	14.86	14.91	14.91		0
	3	0	14.87	14.84	14.87		0
	3	2	14.86	14.79	14.86		0
	3	3	14.87	14.82	14.88		0
	6	0	14.89	14.81	14.84	0-1	0
16QAM	1	0	14.95	14.94	14.99	0-1	0
	1	2	14.94	14.93	14.96		0
	1	5	14.98	14.95	14.95		0
	3	0	14.91	14.89	14.94		0
	3	2	14.80	14.88	14.95		0
	3	3	14.95	14.91	14.94	0	
64QAM	6	0	14.92	14.86	14.92	0-2	0
	1	0	14.96	14.93	14.98	0-2	0
	1	2	14.93	14.97	14.97		0
	1	5	14.94	14.98	14.99		0
	3	0	14.88	14.95	14.95		0
	3	2	14.98	14.96	14.93		0
	3	3	14.87	14.97	14.94	0-3	0
	6	0	14.87	14.92	14.93		0

FCC ID: BCGA2014		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 66 of 195

Table 8-65
LTE Band 66 (AWS) Reduced Conducted Powers - 20 MHz Bandwidth- Antenna 4B

LTE Band 66 (AWS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132072 (1720.0 MHz)	132322 (1745.0 MHz)	132572 (1770.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.92	14.95	14.98	0	0
	1	50	14.85	14.85	14.96		0
	1	99	14.88	14.82	14.95		0
	50	0	14.86	14.80	14.91	0-1	0
	50	25	14.82	14.78	14.85		0
	50	50	14.80	14.74	14.86		0
	100	0	14.83	14.81	14.90		0
16QAM	1	0	14.92	14.97	14.94	0-1	0
	1	50	14.91	14.96	14.96		0
	1	99	14.90	14.96	14.99		0
	50	0	14.87	14.79	14.92	0-2	0
	50	25	14.82	14.70	14.93		0
	50	50	14.81	14.70	14.97		0
	100	0	14.88	14.83	14.96		0
64QAM	1	0	14.99	14.97	14.99	0-2	0
	1	50	14.91	14.98	14.98		0
	1	99	14.90	14.87	14.96		0
	50	0	14.90	14.79	14.90	0-3	0
	50	25	14.81	14.80	14.91		0
	50	50	14.81	14.70	14.97		0
	100	0	14.86	14.84	14.95		0

Table 8-66
LTE Band 66 (AWS) Reduced Conducted Powers - 15 MHz Bandwidth- Antenna 4B

LTE Band 66 (AWS) 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132047 (1717.5 MHz)	132322 (1745.0 MHz)	132597 (1772.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.95	14.85	14.93	0	0
	1	36	14.92	14.85	14.99		0
	1	74	14.83	14.88	14.90		0
	36	0	14.85	14.75	14.93	0-1	0
	36	18	14.86	14.77	14.94		0
	36	37	14.79	14.69	14.96		0
	75	0	14.92	14.83	14.96		0
16QAM	1	0	14.95	14.95	14.96	0-1	0
	1	36	14.99	14.99	14.98		0
	1	74	14.97	14.98	14.97		0
	36	0	14.89	14.73	14.89	0-2	0
	36	18	14.89	14.77	14.97		0
	36	37	14.82	14.69	14.96		0
	75	0	14.88	14.76	14.98		0
64QAM	1	0	14.95	14.94	14.97	0-2	0
	1	36	14.99	14.98	14.98		0
	1	74	15.00	14.94	14.74		0
	36	0	14.84	14.76	14.91	0-3	0
	36	18	14.84	14.78	14.95		0
	36	37	14.79	14.68	14.92		0
	75	0	14.89	14.78	14.89		0

FCC ID: BCGA2014	 SAR EVALUATION REPORT			Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device		Page 67 of 195

Table 8-67
LTE Band 66 (AWS) Reduced Conducted Powers - 10 MHz Bandwidth- Antenna 4B

LTE Band 66 (AWS) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132022 (1715.0 MHz)	132322 (1745.0 MHz)	132622 (1775.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.91	14.82	14.96	0	0
	1	25	14.96	14.75	14.98		0
	1	49	14.88	14.72	14.94		0
	25	0	14.87	14.70	14.94	0-1	0
	25	12	14.85	14.70	14.92		0
	25	25	14.86	14.75	14.94		0
	50	0	14.87	14.75	14.93		0
16QAM	1	0	14.91	14.88	14.95	0-1	0
	1	25	14.92	14.80	14.99		0
	1	49	14.89	14.89	14.97		0
	25	0	14.86	14.80	14.94	0-2	0
	25	12	14.86	14.70	14.93		0
	25	25	14.89	14.79	14.93		0
	50	0	14.85	14.67	14.97		0
64QAM	1	0	14.96	14.94	14.96	0-2	0
	1	25	14.92	14.95	14.99		0
	1	49	14.98	14.96	14.98		0
	25	0	14.93	14.78	14.96	0-3	0
	25	12	14.87	14.81	14.95		0
	25	25	14.88	14.80	14.96		0
	50	0	14.89	14.76	14.97		0

Table 8-68
LTE Band 66 (AWS) Reduced Conducted Powers - 5 MHz Bandwidth- Antenna 4B

LTE Band 66 (AWS) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			131997 (1712.5 MHz)	132322 (1745.0 MHz)	132647 (1777.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.93	14.90	14.94	0	0
	1	12	14.98	14.87	14.98		0
	1	24	14.99	14.88	14.92		0
	12	0	14.88	14.81	14.99	0-1	0
	12	6	14.92	14.80	14.90		0
	12	13	14.94	14.75	14.98		0
	25	0	14.89	14.77	14.92		0
16QAM	1	0	14.94	14.98	14.99	0-1	0
	1	12	14.91	14.94	14.98		0
	1	24	14.99	14.97	14.96		0
	12	0	14.87	14.82	14.94	0-2	0
	12	6	14.93	14.81	14.93		0
	12	13	14.96	14.86	14.95		0
	25	0	14.93	14.80	14.92		0
64QAM	1	0	14.97	14.95	14.98	0-2	0
	1	12	14.98	14.96	14.99		0
	1	24	14.97	14.97	14.97		0
	12	0	14.81	14.79	14.96	0-3	0
	12	6	14.88	14.80	14.96		0
	12	13	14.86	14.82	14.90		0
	25	0	14.91	14.75	14.91		0

FCC ID: BCGA2014	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device		Page 68 of 195

Table 8-69
LTE Band 66 (AWS) Reduced Conducted Powers - 3 MHz Bandwidth- Antenna 4B

LTE Band 66 (AWS) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			131987 (1711.5 MHz)	132322 (1745.0 MHz)	132657 (1778.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.88	14.77	14.99	0	0
	1	7	14.93	14.82	14.98		0
	1	14	14.93	14.79	14.94		0
	8	0	14.90	14.79	14.99	0-1	0
	8	4	14.88	14.78	14.95		0
	8	7	14.94	14.80	14.93		0
16QAM	15	0	14.87	14.78	14.94	0	
	1	0	14.97	14.97	14.96	0-1	0
	1	7	14.98	14.99	14.99		0
	1	14	14.99	14.98	14.97		0
	8	0	14.91	14.85	14.95	0-2	0
	8	4	14.88	14.86	14.97		0
8	7	14.97	14.87	14.93	0		
64QAM	15	0	14.88	14.79	14.95	0	
	1	0	14.92	14.93	14.99	0-2	0
	1	7	14.93	14.97	14.91		0
	1	14	14.98	14.97	14.94		0
	8	0	14.83	14.80	14.95	0-3	0
	8	4	14.88	14.81	14.95		0
	8	7	14.90	14.78	14.94		0
	15	0	14.83	14.75	14.90	0	

Table 8-70
LTE Band 66 (AWS) Reduced Conducted Powers -1.4 MHz Bandwidth- Antenna 4B

LTE Band 66 (AWS) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			131979 (1710.7 MHz)	132322 (1745.0 MHz)	132665 (1779.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.91	14.88	14.86	0	0
	1	2	14.96	14.87	14.84		0
	1	5	14.95	14.87	14.87		0
	3	0	14.94	14.84	14.82		0
	3	2	14.92	14.83	14.81		0
	3	3	14.93	14.86	14.82		0
	6	0	14.85	14.85	14.80	0-1	0
16QAM	1	0	14.98	14.84	14.98	0-1	0
	1	2	14.96	14.77	14.96		0
	1	5	14.85	14.78	14.97		0
	3	0	14.84	14.77	14.92		0
	3	2	14.87	14.72	14.90		0
	3	3	14.78	14.95	14.93		0
	6	0	14.88	14.93	14.87	0-2	0
64QAM	1	0	14.84	14.92	14.92	0-2	0
	1	2	14.87	14.93	14.93		0
	1	5	14.74	14.92	14.97		0
	3	0	14.94	15.00	14.87		0
	3	2	14.91	14.94	14.90		0
	3	3	14.96	14.93	14.94		0
	6	0	14.94	14.88	14.86	0-3	0

FCC ID: BCGA2014		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device		Page 69 of 195

Table 8-71
LTE Band 66 (AWS) Reduced Conducted Powers - 20 MHz Bandwidth- Antenna 2A

LTE Band 66 (AWS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132072 (1720.0 MHz)	132322 (1745.0 MHz)	132572 (1770.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.33	14.49	14.35	0	0
	1	50	14.30	14.47	14.29		0
	1	99	14.31	14.45	14.38		0
	50	0	14.39	14.45	14.25	0-1	0
	50	25	14.39	14.32	14.27		0
	50	50	14.36	14.28	14.33		0
	100	0	14.38	14.39	14.33		0
16QAM	1	0	14.42	14.46	14.41	0-1	0
	1	50	14.48	14.38	14.35		0
	1	99	14.46	14.48	14.47		0
	50	0	14.42	14.28	14.15	0-2	0
	50	25	14.43	14.28	14.13		0
	50	50	14.38	14.29	14.22		0
	100	0	14.47	14.32	14.24		0
64QAM	1	0	14.35	14.46	14.42	0-2	0
	1	50	14.47	14.40	14.32		0
	1	99	14.49	14.40	14.35		0
	50	0	14.23	14.14	14.03	0-3	0
	50	25	14.25	14.16	14.05		0
	50	50	14.21	14.13	14.14		0
	100	0	14.29	14.22	14.11		0

Table 8-72
LTE Band 66 (AWS) Reduced Conducted Powers - 15 MHz Bandwidth- Antenna 2A

LTE Band 66 (AWS) 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132047 (1717.5 MHz)	132322 (1745.0 MHz)	132597 (1772.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.45	14.14	14.07	0	0
	1	36	14.48	14.11	14.11		0
	1	74	14.46	14.10	14.06		0
	36	0	14.32	14.15	14.09	0-1	0
	36	18	14.33	14.15	14.14		0
	36	37	14.32	14.09	14.13		0
	75	0	14.39	14.21	14.18		0
16QAM	1	0	14.39	14.45	14.39	0-1	0
	1	36	14.46	14.44	14.37		0
	1	74	14.47	14.42	14.37		0
	36	0	14.31	14.15	14.08	0-2	0
	36	18	14.30	14.16	14.14		0
	36	37	14.33	14.15	14.13		0
	75	0	14.37	14.17	14.20		0
64QAM	1	0	14.42	14.49	14.30	0-2	0
	1	36	14.48	14.40	14.34		0
	1	74	14.49	14.37	14.33		0
	36	0	14.25	14.14	14.04	0-3	0
	36	18	14.27	14.13	14.07		0
	36	37	14.26	14.08	14.09		0
	75	0	14.28	14.16	14.13		0

FCC ID: BCGA2014	 SAR EVALUATION REPORT			Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device		Page 70 of 195

Table 8-73
LTE Band 66 (AWS) Reduced Conducted Powers - 10 MHz Bandwidth- Antenna 2A

LTE Band 66 (AWS) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132022 (1715.0 MHz)	132322 (1745.0 MHz)	132622 (1775.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.22	14.12	14.11	0	0
	1	25	14.27	14.08	14.17		0
	1	49	14.31	14.07	14.16		0
	25	0	14.30	14.14	14.18	0-1	0
	25	12	14.31	14.13	14.17		0
	25	25	14.34	14.16	14.20		0
	50	0	14.34	14.16	14.17		0
16QAM	1	0	14.43	14.38	14.34	0-1	0
	1	25	14.47	14.49	14.45		0
	1	49	14.49	14.36	14.44		0
	25	0	14.30	14.18	14.19	0-2	0
	25	12	14.29	14.14	14.18		0
	25	25	14.32	14.17	14.21		0
	50	0	14.31	14.17	14.19		0
64QAM	1	0	14.45	14.43	14.33	0-2	0
	1	25	14.47	14.49	14.35		0
	1	49	14.49	14.38	14.36		0
	25	0	14.23	14.13	14.09	0-3	0
	25	12	14.23	14.12	14.11		0
	25	25	14.25	14.18	14.07		0
	50	0	14.23	14.14	14.11		0

Table 8-74
LTE Band 66 (AWS) Reduced Conducted Powers - 5 MHz Bandwidth- Antenna 2A

LTE Band 66 (AWS) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			131997 (1712.5 MHz)	132322 (1745.0 MHz)	132647 (1777.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.34	14.12	14.35	0	0
	1	12	14.36	14.09	14.37		0
	1	24	14.42	14.12	14.36		0
	12	0	14.26	14.16	14.20	0-1	0
	12	6	14.30	14.15	14.21		0
	12	13	14.36	14.18	14.19		0
	25	0	14.35	14.17	14.21		0
16QAM	1	0	14.43	14.25	14.46	0-1	0
	1	12	14.48	14.22	14.44		0
	1	24	14.45	14.27	14.41		0
	12	0	14.27	14.19	14.25	0-2	0
	12	6	14.36	14.15	14.23		0
	12	13	14.38	14.18	14.20		0
	25	0	14.38	14.17	14.25		0
64QAM	1	0	14.46	14.45	14.49	0-2	0
	1	12	14.49	14.40	14.47		0
	1	24	14.46	14.34	14.46		0
	12	0	14.18	14.21	14.22	0-3	0
	12	6	14.26	14.21	14.20		0
	12	13	14.26	14.19	14.17		0
	25	0	14.25	14.17	14.25		0

FCC ID: BCGA2014		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device		Page 71 of 195

Table 8-75
LTE Band 66 (AWS) Reduced Conducted Powers - 3 MHz Bandwidth- Antenna 2A

LTE Band 66 (AWS) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			131987 (1711.5 MHz)	132322 (1745.0 MHz)	132657 (1778.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.17	14.06	14.17	0	0
	1	7	14.23	14.10	14.19		0
	1	14	14.26	14.08	14.14		0
	8	0	14.30	14.17	14.25	0-1	0
	8	4	14.30	14.17	14.18		0
	8	7	14.37	14.18	14.19		0
	15	0	14.31	14.17	14.20		0
16QAM	1	0	14.41	14.43	14.43	0-1	0
	1	7	14.43	14.47	14.46		0
	1	14	14.48	14.42	14.44		0
	8	0	14.33	14.29	14.29	0-2	0
	8	4	14.35	14.22	14.24		0
	8	7	14.40	14.25	14.25		0
	15	0	14.35	14.18	14.25		0
64QAM	1	0	14.40	14.41	14.40	0-2	0
	1	7	14.48	14.44	14.42		0
	1	14	14.47	14.40	14.34		0
	8	0	14.25	14.24	14.28	0-3	0
	8	4	14.24	14.20	14.22		0
	8	7	14.31	14.23	14.19		0
	15	0	14.23	14.18	14.16		0

Table 8-76
LTE Band 66 (AWS) Reduced Conducted Powers -1.4 MHz Bandwidth- Antenna 2A

LTE Band 66 (AWS) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			131979 (1710.7 MHz)	132322 (1745.0 MHz)	132665 (1779.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.22	14.29	14.15	0	0
	1	2	14.23	14.27	14.14		0
	1	5	14.24	14.31	14.16		0
	3	0	14.31	14.18	14.19		0
	3	2	14.30	14.16	14.22		0
	3	3	14.31	14.18	14.21		0
	6	0	14.28	14.16	14.18	0-1	0
16QAM	1	0	14.47	14.41	14.41	0-1	0
	1	2	14.46	14.49	14.44		0
	1	5	14.49	14.48	14.47		0
	3	0	14.33	14.30	14.33		0
	3	2	14.41	14.31	14.35		0
	3	3	14.38	14.39	14.29		0
	6	0	14.33	14.33	14.22	0-2	0
64QAM	1	0	14.39	14.46	14.43	0-2	0
	1	2	14.44	14.43	14.41		0
	1	5	14.42	14.39	14.43		0
	3	0	14.27	14.24	14.22		0
	3	2	14.30	14.29	14.25		0
	3	3	14.33	14.27	14.28		0
	6	0	14.25	14.30	14.22	0-3	0

FCC ID: BCGA2014		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 72 of 195

Table 8-77
LTE Band 66 (AWS) Reduced Conducted Powers - 20 MHz Bandwidth- Antenna 2B

LTE Band 66 (AWS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132072 (1720.0 MHz)	132322 (1745.0 MHz)	132572 (1770.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.15	14.18	14.27	0	0
	1	50	14.17	14.19	14.26		0
	1	99	14.18	14.23	14.23		0
	50	0	14.13	14.21	14.08	0-1	0
	50	25	14.15	14.20	14.18		0
	50	50	14.14	14.21	14.22		0
	100	0	14.17	14.21	14.13		0
16QAM	1	0	14.23	14.24	14.25	0-1	0
	1	50	14.26	14.22	14.19		0
	1	99	14.25	14.23	14.16		0
	50	0	14.01	14.00	14.00	0-2	0
	50	25	14.03	14.05	14.01		0
	50	50	14.05	14.04	14.00		0
	100	0	14.04	14.00	14.02		0
64QAM	1	0	14.25	14.26	14.25	0-2	0
	1	50	14.21	14.26	14.26		0
	1	99	14.26	14.19	14.24		0
	50	0	14.04	14.05	14.00	0-3	0
	50	25	14.05	14.06	14.06		0
	50	50	14.01	14.01	14.02		0
	100	0	14.05	14.02	14.05		0

Table 8-78
LTE Band 66 (AWS) Reduced Conducted Powers - 15 MHz Bandwidth- Antenna 2B

LTE Band 66 (AWS) 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132047 (1717.5 MHz)	132322 (1745.0 MHz)	132597 (1772.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.00	14.05	14.01	0	0
	1	36	14.03	14.01	14.08		0
	1	74	14.04	14.08	14.00		0
	36	0	14.02	14.07	14.00	0-1	0
	36	18	14.04	14.04	14.03		0
	36	37	14.03	14.00	14.01		0
	75	0	14.00	14.07	14.06		0
16QAM	1	0	14.21	14.26	14.15	0-1	0
	1	36	14.19	14.25	14.25		0
	1	74	14.13	14.22	14.22		0
	36	0	14.00	14.06	14.00	0-2	0
	36	18	14.00	14.08	14.02		0
	36	37	14.01	14.00	14.05		0
	75	0	14.04	14.00	14.07		0
64QAM	1	0	14.26	14.24	14.21	0-2	0
	1	36	14.21	14.23	14.26		0
	1	74	14.23	14.26	14.24		0
	36	0	14.01	14.04	14.01	0-3	0
	36	18	14.02	14.07	14.04		0
	36	37	14.03	14.02	14.03		0
	75	0	14.02	14.00	14.06		0

FCC ID: BCGA2014	 SAR EVALUATION REPORT			Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device		Page 73 of 195

Table 8-79
LTE Band 66 (AWS) Reduced Conducted Powers - 10 MHz Bandwidth- Antenna 2B

LTE Band 66 (AWS) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132022 (1715.0 MHz)	132322 (1745.0 MHz)	132622 (1775.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.02	14.09	14.10	0	0
	1	25	14.05	14.06	14.06		0
	1	49	14.12	14.04	14.05		0
	25	0	14.04	14.01	14.11	0-1	0
	25	12	14.03	14.00	14.07		0
	25	25	14.01	14.03	14.02		0
	50	0	14.02	14.02	14.04		0
16QAM	1	0	14.24	14.33	14.31	0-1	0
	1	25	14.32	14.28	14.28		0
	1	49	14.27	14.27	14.29		0
	25	0	14.03	14.06	14.10	0-2	0
	25	12	14.00	14.04	14.07		0
	25	25	14.01	14.05	14.03		0
	50	0	14.01	14.05	14.05		0
64QAM	1	0	14.24	14.34	14.30	0-2	0
	1	25	14.31	14.30	14.33		0
	1	49	14.33	14.34	14.21		0
	25	0	14.02	14.05	14.07	0-3	0
	25	12	14.00	14.06	14.08		0
	25	25	14.04	14.07	14.01		0
	50	0	14.05	14.09	14.02		0

Table 8-80
LTE Band 66 (AWS) Reduced Conducted Powers - 5 MHz Bandwidth- Antenna 2B

LTE Band 66 (AWS) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			131997 (1712.5 MHz)	132322 (1745.0 MHz)	132647 (1777.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.05	14.09	14.11	0	0
	1	12	14.10	14.07	14.06		0
	1	24	14.14	14.12	14.06		0
	12	0	14.01	14.05	14.04	0-1	0
	12	6	14.03	14.03	14.05		0
	12	13	14.04	14.01	14.01		0
	25	0	14.04	14.03	14.07		0
16QAM	1	0	14.27	14.27	14.31	0-1	0
	1	12	14.27	14.29	14.28		0
	1	24	14.30	14.29	14.27		0
	12	0	14.00	14.08	14.06	0-2	0
	12	6	14.05	14.07	14.05		0
	12	13	14.06	14.05	14.03		0
	25	0	14.05	14.04	14.06		0
64QAM	1	0	14.32	14.34	14.29	0-2	0
	1	12	14.33	14.31	14.32		0
	1	24	14.35	14.35	14.31		0
	12	0	14.00	14.08	14.04	0-3	0
	12	6	14.04	14.05	14.04		0
	12	13	14.07	14.08	14.00		0
	25	0	14.07	14.06	14.03		0

FCC ID: BCGA2014		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device		Page 74 of 195

Table 8-81
LTE Band 66 (AWS) Reduced Conducted Powers - 3 MHz Bandwidth- Antenna 2B

LTE Band 66 (AWS) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			131987 (1711.5 MHz)	132322 (1745.0 MHz)	132657 (1778.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.00	14.06	14.09	0	0
	1	7	14.06	14.11	14.12		0
	1	14	14.07	14.05	14.04		0
	8	0	14.02	14.06	14.11	0-1	0
	8	4	14.02	14.07	14.06		0
	8	7	14.09	14.08	14.05		0
	15	0	14.01	14.05	14.04		0
16QAM	1	0	14.20	14.30	14.30	0-1	0
	1	7	14.26	14.30	14.35		0
	1	14	14.35	14.28	14.29		0
	8	0	14.06	14.08	14.13	0-2	0
	8	4	14.05	14.10	14.08		0
	8	7	14.11	14.12	14.07		0
	15	0	14.02	14.09	14.06		0
64QAM	1	0	14.22	14.28	14.29	0-2	0
	1	7	14.24	14.35	14.38		0
	1	14	14.30	14.34	14.27		0
	8	0	14.08	14.10	14.15	0-3	0
	8	4	14.07	14.12	14.12		0
	8	7	14.13	14.15	14.10		0
	15	0	14.03	14.10	14.09		0

Table 8-82
LTE Band 66 (AWS) Reduced Conducted Powers -1.4 MHz Bandwidth- Antenna 2B

LTE Band 66 (AWS) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			131979 (1710.7 MHz)	132322 (1745.0 MHz)	132665 (1779.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.02	14.08	14.04	0	0
	1	2	14.01	14.05	14.03		0
	1	5	14.04	14.08	14.05		0
	3	0	14.00	14.06	14.02		0
	3	2	14.00	14.06	14.03		0
	3	3	14.02	14.07	14.04		0
	6	0	14.00	14.04	14.02	0-1	0
16QAM	1	0	14.12	14.22	14.21	0-1	0
	1	2	14.13	14.25	14.20		0
	1	5	14.23	14.28	14.18		0
	3	0	14.10	14.14	14.14		0
	3	2	14.09	14.15	14.11		0
	3	3	14.09	14.17	14.10		0
	6	0	14.03	14.10	14.01	0-2	0
64QAM	1	0	14.23	14.25	14.24	0-2	0
	1	2	14.27	14.29	14.26		0
	1	5	14.24	14.28	14.24		0
	3	0	14.11	14.19	14.11		0
	3	2	14.07	14.15	14.16		0
	3	3	14.14	14.16	14.13		0
	6	0	14.03	14.07	14.01	0-3	0

FCC ID: BCGA2014		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device		Page 75 of 195

8.3.9 LTE Band 25 (PCS)

Table 8-83
LTE Band 25 (PCS) Reduced Conducted Powers - 20 MHz Bandwidth- Antenna 4A

LTE Band 25 (PCS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26140 (1860.0 MHz)	26365 (1882.5 MHz)	26590 (1905.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.98	14.75	14.83	0	0
	1	50	14.78	14.64	14.57		0
	1	99	14.80	14.69	14.69		0
	50	0	14.80	14.69	14.71	0-1	0
	50	25	14.64	14.67	14.57		0
	50	50	14.65	14.64	14.62		0
	100	0	14.74	14.72	14.70		0
16QAM	1	0	14.94	14.95	14.98	0-1	0
	1	50	14.74	14.78	14.73		0
	1	99	14.76	14.90	14.90		0
	50	0	14.66	14.56	14.67	0-2	0
	50	25	14.53	14.60	14.52		0
	50	50	14.49	14.62	14.57		0
	100	0	14.60	14.64	14.65		0
64QAM	1	0	14.95	14.99	14.98	0-2	0
	1	50	14.80	14.88	14.76		0
	1	99	14.86	14.89	14.97		0
	50	0	14.66	14.62	14.66	0-3	0
	50	25	14.54	14.60	14.53		0
	50	50	14.51	14.62	14.59		0
	100	0	14.59	14.65	14.65		0

Table 8-84
LTE Band 25 (PCS) Reduced Conducted Powers - 15 MHz Bandwidth- Antenna 4A

LTE Band 25 (PCS) 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26115 (1857.5 MHz)	26365 (1882.5 MHz)	26615 (1907.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.94	14.76	14.83	0	0
	1	36	14.75	14.68	14.57		0
	1	74	14.79	14.72	14.69		0
	36	0	14.82	14.78	14.69	0-1	0
	36	18	14.62	14.70	14.53		0
	36	37	14.64	14.80	14.59		0
	75	0	14.73	14.87	14.69		0
16QAM	1	0	14.90	15.08	14.94	0-1	0
	1	36	14.75	14.96	14.71		0
	1	74	14.74	15.07	14.88		0
	36	0	14.65	14.78	14.66	0-2	0
	36	18	14.54	14.74	14.56		0
	36	37	14.53	14.77	14.58		0
	75	0	14.63	14.66	14.64		0
64QAM	1	0	14.91	14.96	14.96	0-2	0
	1	36	14.78	14.87	14.77		0
	1	74	14.86	14.91	15.00		0
	36	0	14.62	14.64	14.68	0-3	0
	36	18	14.57	14.58	14.51		0
	36	37	14.49	14.63	14.59		0
	75	0	14.56	14.66	14.63		0

FCC ID: BCGA2014	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 76 of 195

Table 8-85
LTE Band 25 (PCS) Reduced Conducted Powers - 10 MHz Bandwidth- Antenna 4A

LTE Band 25 (PCS) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26090 (1855.0 MHz)	26365 (1882.5 MHz)	26640 (1910.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.97	14.73	14.82	0	0
	1	25	14.76	14.70	14.57		0
	1	49	14.83	14.73	14.66		0
	25	0	14.80	14.77	14.68	0-1	0
	25	12	14.64	14.69	14.49		0
	25	25	14.68	14.77	14.62		0
	50	0	14.73	14.87	14.72		0
16QAM	1	0	14.93	14.95	14.98	0-1	0
	1	25	14.77	14.93	14.75		0
	1	49	14.71	14.96	14.90		0
	25	0	14.67	14.79	14.69	0-2	0
	25	12	14.50	14.70	14.55		0
	25	25	14.55	14.81	14.56		0
	50	0	14.65	14.64	14.60		0
64QAM	1	0	14.89	14.95	14.98	0-2	0
	1	25	14.79	14.91	14.81		0
	1	49	14.89	14.93	14.99		0
	25	0	14.59	14.60	14.65	0-3	0
	25	12	14.57	14.56	14.49		0
	25	25	14.52	14.61	14.59		0
	50	0	14.53	14.67	14.59		0

Table 8-86
LTE Band 25 (PCS) Reduced Conducted Powers - 5 MHz Bandwidth- Antenna 4A

LTE Band 25 (PCS) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26065 (1852.5 MHz)	26365 (1882.5 MHz)	26665 (1912.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.94	14.75	14.81	0	0
	1	12	14.78	14.68	14.59		0
	1	24	14.79	14.74	14.64		0
	12	0	14.81	14.75	14.69	0-1	0
	12	6	14.61	14.71	14.49		0
	12	13	14.67	14.73	14.59		0
	25	0	14.70	14.86	14.72		0
16QAM	1	0	14.90	14.93	15.00	0-1	0
	1	12	14.76	14.96	14.76		0
	1	24	14.74	14.92	14.93		0
	12	0	14.63	14.82	14.66	0-2	0
	12	6	14.52	14.73	14.59		0
	12	13	14.58	14.81	14.59		0
	25	0	14.64	14.66	14.61		0
64QAM	1	0	14.93	14.91	14.95	0-2	0
	1	12	14.81	14.88	14.79		0
	1	24	14.85	14.95	14.97		0
	12	0	14.58	14.63	14.64	0-3	0
	12	6	14.54	14.53	14.45		0
	12	13	14.51	14.60	14.61		0
	25	0	14.54	14.68	14.59		0

FCC ID: BCGA2014	 SAR EVALUATION REPORT			Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device		Page 77 of 195

Table 8-87
LTE Band 25 (PCS) Reduced Conducted Powers - 3 MHz Bandwidth- Antenna 4A

LTE Band 25 (PCS) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26055 (1851.5 MHz)	26365 (1882.5 MHz)	26675 (1913.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.97	14.77	14.79	0	0
	1	7	14.79	14.65	14.62		0
	1	14	14.79	14.74	14.65		0
	8	0	14.80	14.76	14.67	0-1	0
	8	4	14.60	14.72	14.46		0
	8	7	14.69	14.76	14.63		0
	15	0	14.69	14.85	14.71		0
16QAM	1	0	14.92	14.97	14.97	0-1	0
	1	7	14.73	14.98	14.79		0
	1	14	14.70	14.91	14.92		0
	8	0	14.63	14.79	14.64	0-2	0
	8	4	14.54	14.72	14.61		0
	8	7	14.57	14.78	14.55		0
	15	0	14.60	14.66	14.65		0
64QAM	1	0	14.94	14.89	14.92	0-2	0
	1	7	14.80	14.89	14.77		0
	1	14	14.87	14.99	14.94		0
	8	0	14.60	14.63	14.64	0-3	0
	8	4	14.50	14.56	14.42		0
	8	7	14.51	14.63	14.63		0
	15	0	14.56	14.70	14.63		0

Table 8-88
LTE Band 25 (PCS) Reduced Conducted Powers -1.4 MHz Bandwidth- Antenna 4A

LTE Band 25 (PCS) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26047 (1850.7 MHz)	26365 (1882.5 MHz)	26683 (1914.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.94	14.79	14.75	0	0
	1	2	14.81	14.62	14.63		0
	1	5	14.77	14.71	14.66		0
	3	0	14.78	14.77	14.64		0
	3	2	14.62	14.71	14.47		0
	3	3	14.66	14.73	14.60		0
	6	0	14.66	14.88	14.71	0-1	0
16QAM	1	0	14.95	14.95	14.96	0-1	0
	1	2	14.71	14.93	14.81		0
	1	5	14.74	14.94	14.92		0
	3	0	14.62	14.75	14.61		0
	3	2	14.50	14.68	14.60		0
	3	3	14.55	14.78	14.52		0
	6	0	14.58	14.63	14.63	0-2	0
64QAM	1	0	14.91	14.89	14.96	0-2	0
	1	2	14.81	14.92	14.78		0
	1	5	14.91	14.98	14.97		0
	3	0	14.61	14.60	14.60		0
	3	2	14.52	14.60	14.43		0
	3	3	14.52	14.60	14.67		0
	6	0	14.55	14.69	14.64	0-3	0

FCC ID: BCGA2014		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device		Page 78 of 195

Table 8-89
LTE Band 25 (PCS) Reduced Conducted Powers - 20 MHz Bandwidth- Antenna 4B

LTE Band 25 (PCS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26140 (1860.0 MHz)	26365 (1882.5 MHz)	26590 (1905.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.27	14.32	14.44	0	0
	1	50	14.32	14.27	14.33		0
	1	99	14.30	14.28	14.29		0
	50	0	14.43	14.47	14.48	0-1	0
	50	25	14.39	14.34	14.38		0
	50	50	14.29	14.35	14.29		0
	100	0	14.35	14.36	14.43		0
16QAM	1	0	14.29	14.47	14.48	0-1	0
	1	50	14.43	14.43	14.46		0
	1	99	14.47	14.48	14.41		0
	50	0	14.28	14.35	14.44	0-2	0
	50	25	14.30	14.28	14.36		0
	50	50	14.25	14.31	14.27		0
	100	0	14.38	14.30	14.45		0
64QAM	1	0	14.43	14.49	14.49	0-2	0
	1	50	14.46	14.45	14.38		0
	1	99	14.44	14.40	14.46		0
	50	0	14.31	14.38	14.43	0-3	0
	50	25	14.33	14.29	14.37		0
	50	50	14.25	14.30	14.27		0
	100	0	14.38	14.33	14.26		0

Table 8-90
LTE Band 25 (PCS) Reduced Conducted Powers - 15 MHz Bandwidth- Antenna 4B

LTE Band 25 (PCS) 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26115 (1857.5 MHz)	26365 (1882.5 MHz)	26615 (1907.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.42	14.40	14.39	0	0
	1	36	14.48	14.36	14.40		0
	1	74	14.47	14.40	14.25		0
	36	0	14.35	14.41	14.47	0-1	0
	36	18	14.43	14.37	14.46		0
	36	37	14.41	14.39	14.40		0
	75	0	14.44	14.41	14.48		0
16QAM	1	0	14.49	14.44	14.47	0-1	0
	1	36	14.47	14.44	14.49		0
	1	74	14.48	14.49	14.43		0
	36	0	14.27	14.44	14.45	0-2	0
	36	18	14.30	14.36	14.45		0
	36	37	14.32	14.37	14.41		0
	75	0	14.44	14.42	14.47		0
64QAM	1	0	14.46	14.49	14.47	0-2	0
	1	36	14.45	14.47	14.31		0
	1	74	14.43	14.46	14.37		0
	36	0	14.26	14.35	14.18	0-3	0
	36	18	14.25	14.38	14.13		0
	36	37	14.25	14.30	14.14		0
	75	0	14.26	14.29	14.21		0

FCC ID: BCGA2014		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device		Page 79 of 195

Table 8-91
LTE Band 25 (PCS) Reduced Conducted Powers - 10 MHz Bandwidth- Antenna 4B

LTE Band 25 (PCS) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26090 (1855.0 MHz)	26365 (1882.5 MHz)	26640 (1910.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.31	14.42	14.20	0	0
	1	25	14.24	14.28	14.20		0
	1	49	14.27	14.35	14.22		0
	25	0	14.22	14.29	14.15	0-1	0
	25	12	14.23	14.27	14.17		0
	25	25	14.22	14.28	14.16		0
	50	0	14.24	14.29	14.22		0
16QAM	1	0	14.47	14.49	14.44	0-1	0
	1	25	14.46	14.41	14.43		0
	1	49	14.42	14.50	14.35		0
	25	0	14.19	14.28	14.14	0-2	0
	25	12	14.22	14.26	14.17		0
	25	25	14.22	14.25	14.16		0
	50	0	14.22	14.29	14.21		0
64QAM	1	0	14.46	14.49	14.44	0-2	0
	1	25	14.42	14.48	14.46		0
	1	49	14.47	14.46	14.48		0
	25	0	14.22	14.25	14.17	0-3	0
	25	12	14.22	14.26	14.15		0
	25	25	14.21	14.26	14.13		0
	50	0	14.22	14.29	14.21		0

Table 8-92
LTE Band 25 (PCS) Reduced Conducted Powers - 5 MHz Bandwidth- Antenna 4B

LTE Band 25 (PCS) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26065 (1852.5 MHz)	26365 (1882.5 MHz)	26665 (1912.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.25	14.26	14.27	0	0
	1	12	14.23	14.25	14.19		0
	1	24	14.31	14.26	14.16		0
	12	0	14.25	14.22	14.17	0-1	0
	12	6	14.22	14.24	14.15		0
	12	13	14.25	14.25	14.11		0
	25	0	14.23	14.24	14.18		0
16QAM	1	0	14.40	14.41	14.46	0-1	0
	1	12	14.41	14.44	14.35		0
	1	24	14.46	14.45	14.40		0
	12	0	14.26	14.20	14.17	0-2	0
	12	6	14.23	14.24	14.14		0
	12	13	14.27	14.28	14.10		0
	25	0	14.21	14.24	14.15		0
64QAM	1	0	14.42	14.38	14.44	0-2	0
	1	12	14.38	14.40	14.33		0
	1	24	14.46	14.44	14.39		0
	12	0	14.23	14.21	14.17	0-3	0
	12	6	14.22	14.22	14.15		0
	12	13	14.26	14.25	14.12		0
	25	0	14.22	14.24	14.14		0

FCC ID: BCGA2014	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device		Page 80 of 195

Table 8-93
LTE Band 25 (PCS) Reduced Conducted Powers - 3 MHz Bandwidth- Antenna 4B

LTE Band 25 (PCS) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26055 (1851.5 MHz)	26365 (1882.5 MHz)	26675 (1913.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.21	14.21	14.16	0	0
	1	7	14.30	14.24	14.12		0
	1	14	14.21	14.22	14.09		0
	8	0	14.24	14.26	14.16	0-1	0
	8	4	14.26	14.24	14.09		0
	8	7	14.23	14.21	14.10		0
	15	0	14.27	14.23	14.11		0
16QAM	1	0	14.35	14.37	14.36	0-1	0
	1	7	14.42	14.44	14.32		0
	1	14	14.39	14.41	14.21		0
	8	0	14.26	14.28	14.16	0-2	0
	8	4	14.26	14.24	14.13		0
	8	7	14.24	14.23	14.13		0
	15	0	14.28	14.24	14.09		0
64QAM	1	0	14.37	14.46	14.34	0-2	0
	1	7	14.45	14.39	14.36		0
	1	14	14.39	14.40	14.30		0
	8	0	14.24	14.30	14.13	0-3	0
	8	4	14.27	14.22	14.11		0
	8	7	14.20	14.24	14.11		0
	15	0	14.26	14.24	14.10		0

Table 8-94
LTE Band 25 (PCS) Reduced Conducted Powers -1.4 MHz Bandwidth- Antenna 4B

LTE Band 25 (PCS) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26047 (1850.7 MHz)	26365 (1882.5 MHz)	26683 (1914.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.27	14.29	14.18	0	0
	1	2	14.26	14.25	14.15		0
	1	5	14.30	14.25	14.17		0
	3	0	14.26	14.27	14.15		0
	3	2	14.27	14.24	14.14		0
	3	3	14.28	14.23	14.15		0
	6	0	14.26	14.25	14.13	0-1	0
16QAM	1	0	14.40	14.46	14.37	0-1	0
	1	2	14.44	14.40	14.36		0
	1	5	14.43	14.41	14.22		0
	3	0	14.34	14.30	14.21		0
	3	2	14.29	14.33	14.22		0
	3	3	14.36	14.28	14.21		0
	6	0	14.26	14.29	14.14	0-2	0
64QAM	1	0	14.43	14.44	14.38	0-2	0
	1	2	14.46	14.43	14.31		0
	1	5	14.46	14.45	14.39		0
	3	0	14.32	14.30	14.18		0
	3	2	14.27	14.28	14.20		0
	3	3	14.31	14.26	14.17		0
	6	0	14.25	14.27	14.16	0-3	0

FCC ID: BCGA2014		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device		Page 81 of 195

Table 8-95
LTE Band 25 (PCS) Reduced Conducted Powers - 20 MHz Bandwidth- Antenna 2A

LTE Band 25 (PCS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26140 (1860.0 MHz)	26365 (1882.5 MHz)	26590 (1905.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	15.37	15.34	15.12	0	0
	1	50	15.13	15.16	15.00		0
	1	99	15.15	15.26	15.01		0
	50	0	15.25	15.08	15.08	0-1	0
	50	25	15.09	15.04	15.08		0
	50	50	15.11	15.10	15.09		0
	100	0	15.20	15.09	15.17		0
16QAM	1	0	15.38	15.22	15.17	0-1	0
	1	50	15.07	14.99	15.02		0
	1	99	15.16	15.11	15.14		0
	50	0	14.70	14.74	14.73	0-2	0
	50	25	14.51	14.70	14.71		0
	50	50	14.49	14.73	14.80		0
	100	0	14.58	14.75	14.83		0
64QAM	1	0	15.39	15.31	15.27	0-2	0
	1	50	15.13	15.09	15.12		0
	1	99	15.15	15.17	15.20		0
	50	0	15.05	14.90	14.91	0-3	0
	50	25	14.87	14.81	14.85		0
	50	50	14.88	14.86	14.93		0
	100	0	14.92	14.89	14.97		0

Table 8-96
LTE Band 25 (PCS) Reduced Conducted Powers - 15 MHz Bandwidth- Antenna 2A

LTE Band 25 (PCS) 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26115 (1857.5 MHz)	26365 (1882.5 MHz)	26615 (1907.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	15.29	15.13	15.07	0	0
	1	36	15.13	15.03	15.01		0
	1	74	15.06	15.03	15.04		0
	36	0	15.23	15.09	15.09	0-1	0
	36	18	15.13	15.06	15.04		0
	36	37	15.06	15.09	15.09		0
	75	0	15.14	15.08	15.16		0
16QAM	1	0	15.37	15.18	15.12	0-1	0
	1	36	15.18	15.02	15.05		0
	1	74	15.09	15.12	15.11		0
	36	0	14.83	14.69	14.70	0-2	0
	36	18	14.74	14.65	14.65		0
	36	37	14.66	14.68	14.72		0
	75	0	14.77	14.69	14.72		0
64QAM	1	0	15.32	15.20	15.18	0-2	0
	1	36	15.22	15.10	15.09		0
	1	74	15.13	15.07	15.17		0
	36	0	15.03	14.86	14.87	0-3	0
	36	18	14.91	14.82	14.81		0
	36	37	14.83	14.85	14.92		0
	75	0	14.91	14.84	14.89		0

FCC ID: BCGA2014		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 82 of 195

Table 8-97
LTE Band 25 (PCS) Reduced Conducted Powers - 10 MHz Bandwidth- Antenna 2A

LTE Band 25 (PCS) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26090 (1855.0 MHz)	26365 (1882.5 MHz)	26640 (1910.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	15.27	15.09	15.04	0	0
	1	25	15.21	15.00	15.06		0
	1	49	15.08	15.07	15.06		0
	25	0	15.23	15.06	15.02	0-1	0
	25	12	15.22	15.02	15.09		0
	25	25	15.12	15.01	15.14		0
	50	0	15.24	15.05	15.15		0
16QAM	1	0	15.37	15.18	15.16	0-1	0
	1	25	15.28	15.09	15.19		0
	1	49	15.18	15.15	15.21		0
	25	0	14.82	14.72	14.62	0-2	0
	25	12	14.84	14.66	14.68		0
	25	25	14.75	14.64	14.73		0
	50	0	14.83	14.68	14.76		0
64QAM	1	0	15.35	15.15	15.11	0-2	0
	1	25	15.29	15.10	15.20		0
	1	49	15.13	15.17	15.24		0
	25	0	15.01	14.86	14.78	0-3	0
	25	12	15.00	14.81	14.87		0
	25	25	14.90	14.80	14.88		0
	50	0	15.01	14.82	14.95		0

Table 8-98
LTE Band 25 (PCS) Reduced Conducted Powers - 5 MHz Bandwidth- Antenna 2A

LTE Band 25 (PCS) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26065 (1852.5 MHz)	26365 (1882.5 MHz)	26665 (1912.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	15.23	14.97	15.13	0	0
	1	12	15.20	14.92	15.14		0
	1	24	15.21	14.91	15.09		0
	12	0	15.28	15.02	15.14	0-1	0
	12	6	15.23	14.99	15.16		0
	12	13	15.25	14.97	15.09		0
	25	0	15.25	15.02	15.18		0
16QAM	1	0	15.30	15.04	15.16	0-1	0
	1	12	15.21	14.83	15.07		0
	1	24	15.16	14.94	15.02		0
	12	0	14.93	14.70	14.80	0-2	0
	12	6	14.87	14.66	14.78		0
	12	13	14.90	14.65	14.73		0
	25	0	14.84	14.64	14.79		0
64QAM	1	0	15.31	15.10	15.26	0-2	0
	1	12	15.27	15.05	15.22		0
	1	24	15.30	15.03	15.20		0
	12	0	15.04	14.84	14.91	0-3	0
	12	6	15.02	14.80	14.94		0
	12	13	15.04	14.78	14.90		0
	25	0	15.00	14.79	14.91		0

FCC ID: BCGA2014		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device		Page 83 of 195

Table 8-99
LTE Band 25 (PCS) Reduced Conducted Powers - 3 MHz Bandwidth- Antenna 2A

LTE Band 25 (PCS) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26055 (1851.5 MHz)	26365 (1882.5 MHz)	26675 (1913.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	15.18	14.95	15.07	0	0
	1	7	15.27	14.96	15.05		0
	1	14	15.17	14.90	14.97		0
	8	0	15.25	15.00	15.13	0-1	0
	8	4	15.27	14.97	15.05		0
	8	7	15.22	14.97	15.03		0
	15	0	15.28	14.99	15.07		0
16QAM	1	0	15.32	15.11	15.21	0-1	0
	1	7	15.39	15.05	15.13		0
	1	14	15.31	15.02	15.07		0
	8	0	14.89	14.66	14.78	0-2	0
	8	4	14.89	14.64	14.65		0
	8	7	14.86	14.61	14.66		0
	15	0	14.93	14.64	14.69		0
64QAM	1	0	15.30	15.11	15.25	0-2	0
	1	7	15.40	15.14	15.22		0
	1	14	15.29	15.05	15.17		0
	8	0	15.10	14.91	15.01	0-3	0
	8	4	15.13	14.88	14.92		0
	8	7	15.04	14.87	14.94		0
	15	0	15.07	14.84	14.90		0

Table 8-100
LTE Band 25 (PCS) Reduced Conducted Powers -1.4 MHz Bandwidth- Antenna 2A

LTE Band 25 (PCS) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26047 (1850.7 MHz)	26365 (1882.5 MHz)	26683 (1914.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	15.37	15.13	15.20	0	0
	1	2	15.36	15.09	15.18		0
	1	5	15.40	15.09	15.19		0
	3	0	15.26	15.00	15.07		0
	3	2	15.27	14.99	15.06		0
	3	3	15.29	14.98	15.06		0
	6	0	15.28	15.00	15.07	0-1	0
16QAM	1	0	15.37	15.05	15.12	0-1	0
	1	2	15.38	15.04	15.15		0
	1	5	15.39	15.07	15.14		0
	3	0	15.07	14.78	14.84		0
	3	2	15.04	14.76	14.82		0
	3	3	15.03	14.79	14.83		0
	6	0	14.95	14.67	14.73	0-2	0
64QAM	1	0	15.33	15.13	15.24	0-2	0
	1	2	15.35	15.09	15.19		0
	1	5	15.37	15.12	15.22		0
	3	0	15.23	14.99	15.07		0
	3	2	15.18	15.00	15.05		0
	3	3	15.20	14.98	15.04		0
	6	0	15.09	14.89	14.96	0-3	0

FCC ID: BCGA2014		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 84 of 195

Table 8-101
LTE Band 25 (PCS) Reduced Conducted Powers - 20 MHz Bandwidth- Antenna 2B

LTE Band 25 (PCS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26140 (1860.0 MHz)	26365 (1882.5 MHz)	26590 (1905.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	15.30	15.28	15.04	0	0
	1	50	15.08	15.15	14.88		0
	1	99	15.22	15.27	15.03		0
	50	0	15.17	15.08	15.03	0-1	0
	50	25	15.07	15.03	14.98		0
	50	50	15.11	15.07	15.02		0
	100	0	15.14	15.08	15.09		0
16QAM	1	0	15.26	15.15	15.12	0-1	0
	1	50	15.08	15.08	15.04		0
	1	99	15.10	15.19	15.14		0
	50	0	14.93	14.95	14.88	0-2	0
	50	25	14.85	14.85	14.91		0
	50	50	14.87	14.92	14.90		0
	100	0	14.92	14.89	14.91		0
64QAM	1	0	14.87	14.78	14.87	0-2	0
	1	50	14.67	14.74	14.82		0
	1	99	14.73	14.82	14.95		0
	50	0	14.50	14.58	14.61	0-3	0
	50	25	14.43	14.48	14.58		0
	50	50	14.44	14.55	14.64		0
	100	0	14.51	14.53	14.69		0

Table 8-102
LTE Band 25 (PCS) Reduced Conducted Powers - 15 MHz Bandwidth- Antenna 2B

LTE Band 25 (PCS) 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26115 (1857.5 MHz)	26365 (1882.5 MHz)	26615 (1907.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	15.08	15.26	15.05	0	0
	1	36	15.01	15.16	14.98		0
	1	74	14.95	15.17	15.06		0
	36	0	15.06	15.05	15.05	0-1	0
	36	18	15.05	14.99	14.98		0
	36	37	15.00	15.05	15.04		0
	75	0	15.09	15.04	15.06		0
16QAM	1	0	15.26	15.24	15.11	0-1	0
	1	36	15.15	15.13	15.05		0
	1	74	15.02	15.11	15.08		0
	36	0	14.86	14.90	14.84	0-2	0
	36	18	14.88	14.83	14.81		0
	36	37	14.81	14.90	14.84		0
	75	0	14.87	14.86	14.85		0
64QAM	1	0	14.83	14.83	14.83	0-2	0
	1	36	14.75	14.75	14.78		0
	1	74	14.69	14.78	14.68		0
	36	0	14.50	14.55	14.50	0-3	0
	36	18	14.50	14.48	14.49		0
	36	37	14.45	14.55	14.44		0
	75	0	14.51	14.50	14.50		0

FCC ID: BCGA2014		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device		Page 85 of 195

Table 8-103
LTE Band 25 (PCS) Reduced Conducted Powers - 10 MHz Bandwidth- Antenna 2B

LTE Band 25 (PCS) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26090 (1855.0 MHz)	26365 (1882.5 MHz)	26640 (1910.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	15.13	15.10	14.95	0	0
	1	25	15.10	14.99	14.99		0
	1	49	15.06	15.06	15.00		0
	25	0	15.07	15.00	14.98	0-1	0
	25	12	15.08	15.01	15.05		0
	25	25	15.06	15.00	15.10		0
	50	0	15.09	15.03	15.09		0
16QAM	1	0	15.30	15.13	15.08	0-1	0
	1	25	15.21	15.09	15.17		0
	1	49	15.13	15.18	15.27		0
	25	0	14.89	14.82	14.80	0-2	0
	25	12	14.87	14.78	14.86		0
	25	25	14.86	14.82	14.92		0
	50	0	14.89	14.81	14.91		0
64QAM	1	0	14.87	14.84	14.89	0-2	0
	1	25	14.75	14.73	14.92		0
	1	49	14.72	14.80	14.98		0
	25	0	14.47	14.48	14.56	0-3	0
	25	12	14.47	14.47	14.64		0
	25	25	14.45	14.48	14.68		0
	50	0	14.48	14.47	14.67		0

Table 8-104
LTE Band 25 (PCS) Reduced Conducted Powers - 5 MHz Bandwidth- Antenna 2B

LTE Band 25 (PCS) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26065 (1852.5 MHz)	26365 (1882.5 MHz)	26665 (1912.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	15.04	15.05	15.20	0	0
	1	12	14.99	15.03	15.24		0
	1	24	15.02	15.04	15.23		0
	12	0	15.14	14.99	15.06	0-1	0
	12	6	15.09	14.98	15.06		0
	12	13	15.11	14.98	15.01		0
	25	0	15.09	14.99	15.07		0
16QAM	1	0	15.19	15.12	15.14	0-1	0
	1	12	15.08	15.13	15.04		0
	1	24	15.23	15.11	15.14		0
	12	0	15.00	14.81	14.89	0-2	0
	12	6	14.94	14.83	14.92		0
	12	13	14.97	14.85	14.86		0
	25	0	14.89	14.79	14.88		0
64QAM	1	0	14.85	14.73	14.96	0-2	0
	1	12	14.78	14.70	14.98		0
	1	24	14.77	14.72	14.94		0
	12	0	14.57	14.48	14.67	0-3	0
	12	6	14.50	14.48	14.66		0
	12	13	14.52	14.49	14.60		0
	25	0	14.49	14.45	14.66		0

FCC ID: BCGA2014		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device		Page 86 of 195

Table 8-105
LTE Band 25 (PCS) Reduced Conducted Powers - 3 MHz Bandwidth- Antenna 2B

LTE Band 25 (PCS) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26055 (1851.5 MHz)	26365 (1882.5 MHz)	26675 (1913.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	15.00	14.91	15.04	0	0
	1	7	15.06	14.95	15.06		0
	1	14	14.96	14.88	15.02		0
	8	0	15.14	14.96	15.07	0-1	0
	8	4	15.12	14.95	15.00		0
	8	7	15.07	14.96	15.01		0
	15	0	15.13	14.97	15.01		0
16QAM	1	0	15.19	14.98	15.14	0-1	0
	1	7	15.29	15.08	15.29		0
	1	14	15.10	14.99	15.13		0
	8	0	14.98	14.81	14.94	0-2	0
	8	4	14.96	14.83	14.85		0
	8	7	14.92	14.85	14.87		0
	15	0	14.95	14.79	14.86		0
64QAM	1	0	14.76	14.70	14.95	0-2	0
	1	7	14.80	14.76	14.92		0
	1	14	14.71	14.71	14.90		0
	8	0	14.57	14.51	14.72	0-3	0
	8	4	14.55	14.49	14.62		0
	8	7	14.49	14.52	14.62		0
	15	0	14.52	14.47	14.60		0

Table 8-106
LTE Band 25 (PCS) Reduced Conducted Powers -1.4 MHz Bandwidth- Antenna 2B

LTE Band 25 (PCS) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26047 (1850.7 MHz)	26365 (1882.5 MHz)	26683 (1914.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	15.14	15.07	14.99	0	0
	1	2	15.12	15.05	14.98		0
	1	5	15.16	15.08	15.01		0
	3	0	15.15	14.97	15.04		0
	3	2	15.14	14.96	15.03		0
	3	3	15.15	14.96	15.04		0
	6	0	15.12	14.94	14.98	0-1	0
16QAM	1	0	15.27	15.03	15.19	0-1	0
	1	2	15.19	15.05	15.17		0
	1	5	15.24	14.97	15.16		0
	3	0	15.07	14.83	14.94		0
	3	2	15.06	14.85	14.91		0
	3	3	15.08	14.87	14.89		0
	6	0	14.97	14.81	14.87	0-2	0
64QAM	1	0	14.79	14.72	14.96	0-2	0
	1	2	14.77	14.72	14.91		0
	1	5	14.81	14.76	14.96		0
	3	0	14.66	14.61	14.75		0
	3	2	14.64	14.60	14.78		0
	3	3	14.66	14.59	14.80		0
	6	0	14.55	14.49	14.66	0-3	0

FCC ID: BCGA2014		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 87 of 195

8.3.10 LTE Band 30

Table 8-107
LTE Band 30 Reduced Conducted Powers - 10 MHz Bandwidth- Antenna 4A

LTE Band 30 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			27710 (2310.0 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	14.10	0	0
	1	25	14.05		0
	1	49	14.07		0
	25	0	14.09	0-1	0
	25	12	14.02		0
	25	25	14.07		0
	50	0	14.08		0
16QAM	1	0	14.08	0-1	0
	1	25	13.92		0
	1	49	13.89		0
	25	0	13.76	0-2	0
	25	12	13.68		0
	25	25	13.65		0
	50	0	13.72		0
64QAM	1	0	14.07	0-2	0
	1	25	13.96		0
	1	49	13.91		0
	25	0	13.74	0-3	0
	25	12	13.67		0
	25	25	13.64		0
	50	0	13.72		0

Table 8-108
LTE Band 30 Reduced Conducted Powers - 5 MHz Bandwidth- Antenna 4A

LTE Band 30 5 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			27710 (2310.0 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	14.09	0	0
	1	12	14.05		0
	1	24	14.02		0
	12	0	14.04	0-1	0
	12	6	13.96		0
	12	13	14.02		0
	25	0	14.04		0
16QAM	1	0	14.10	0-1	0
	1	12	14.02		0
	1	24	14.01		0
	12	0	13.87	0-2	0
	12	6	13.80		0
	12	13	13.82		0
	25	0	13.84		0
64QAM	1	0	14.09	0-2	0
	1	12	14.03		0
	1	24	14.00		0
	12	0	13.84	0-3	0
	12	6	13.73		0
	12	13	13.80		0
	25	0	13.81		0

Note: LTE Band 30 at 5 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: BCGA2014	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 88 of 195

Table 8-109
LTE Band 30 Reduced Conducted Powers - 10 MHz Bandwidth- Antenna 4B

LTE Band 30 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			27710 (2310.0 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	13.50	0	0
	1	25	13.40		0
	1	49	13.42		0
	25	0	13.39	0-1	0
	25	12	13.37		0
	25	25	13.38		0
	50	0	13.38		0
16QAM	1	0	13.48	0-1	0
	1	25	13.35		0
	1	49	13.39		0
	25	0	13.18	0-2	0
	25	12	13.15		0
	25	25	13.15		0
	50	0	13.16		0
64QAM	1	0	13.47	0-2	0
	1	25	13.39		0
	1	49	13.40		0
	25	0	13.18	0-3	0
	25	12	13.15		0
	25	25	13.18		0
	50	0	13.17		0

Table 8-110
LTE Band 30 Reduced Conducted Powers - 5 MHz Bandwidth- Antenna 4B

LTE Band 30 5 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			27710 (2310.0 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	13.44	0	0
	1	12	13.38		0
	1	24	13.44		0
	12	0	13.43	0-1	0
	12	6	13.39		0
	12	13	13.39		0
	25	0	13.38		0
16QAM	1	0	13.48	0-1	0
	1	12	13.38		0
	1	24	13.41		0
	12	0	13.14	0-2	0
	12	6	13.10		0
	12	13	13.12		0
	25	0	13.11		0
64QAM	1	0	13.40	0-2	0
	1	12	13.33		0
	1	24	13.47		0
	12	0	13.12	0-3	0
	12	6	13.11		0
	12	13	13.12		0
	25	0	13.10		0

Note: LTE Band 30 at 5 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: BCGA2014		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 89 of 195

Table 8-111
LTE Band 30 Reduced Conducted Powers - 10 MHz Bandwidth- Antenna 2A

LTE Band 30 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			27710 (2310.0 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	13.28	0	0
	1	25	13.12		0
	1	49	13.10		0
	25	0	13.25	0-1	0
	25	12	13.17		0
	25	25	13.16		0
	50	0	13.21		0
16QAM	1	0	13.27	0-1	0
	1	25	13.17		0
	1	49	13.24		0
	25	0	12.95	0-2	0
	25	12	12.94		0
	25	25	12.96		0
	50	0	12.98		0
64QAM	1	0	13.19	0-2	0
	1	25	13.08		0
	1	49	13.23		0
	25	0	12.91	0-3	0
	25	12	12.88		0
	25	25	12.97		0
	50	0	12.91		0

Table 8-112
LTE Band 30 Reduced Conducted Powers - 5 MHz Bandwidth- Antenna 2A

LTE Band 30 5 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			27710 (2310.0 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	12.94	0	0
	1	12	12.90		0
	1	24	12.97		0
	12	0	12.98	0-1	0
	12	6	12.99		0
	12	13	13.00		0
	25	0	12.99		0
16QAM	1	0	12.93	0-1	0
	1	12	12.91		0
	1	24	13.00		0
	12	0	12.81	0-2	0
	12	6	12.78		0
	12	13	12.80		0
	25	0	12.77		0
64QAM	1	0	13.17	0-2	0
	1	12	13.10		0
	1	24	13.20		0
	12	0	12.92	0-3	0
	12	6	12.90		0
	12	13	12.89		0
	25	0	12.88		0

Note: LTE Band 30 at 5 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: BCGA2014		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 90 of 195

Table 8-113
LTE Band 30 Reduced Conducted Powers - 10 MHz Bandwidth- Antenna 2B

LTE Band 30 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			27710 (2310.0 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	13.99	0	0
	1	25	13.79		0
	1	49	13.73		0
	25	0	13.84	0-1	0
	25	12	13.70		0
	25	25	13.68		0
	50	0	13.79		0
16QAM	1	0	14.05	0-1	0
	1	25	14.00		0
	1	49	14.17		0
	25	0	13.80	0-2	0
	25	12	13.77		0
	25	25	13.83		0
	50	0	13.78		0
64QAM	1	0	14.11	0-2	0
	1	25	14.09		0
	1	49	14.19		0
	25	0	13.90	0-3	0
	25	12	13.87		0
	25	25	13.92		0
	50	0	13.89		0

Table 8-114
LTE Band 30 Reduced Conducted Powers - 5 MHz Bandwidth- Antenna 2B

LTE Band 30 5 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			27710 (2310.0 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	13.66	0	0
	1	12	13.63		0
	1	24	13.71		0
	12	0	13.76	0-1	0
	12	6	13.77		0
	12	13	13.78		0
	25	0	13.76		0
16QAM	1	0	14.01	0-1	0
	1	12	13.97		0
	1	24	14.07		0
	12	0	13.79	0-2	0
	12	6	13.78		0
	12	13	13.78		0
	25	0	13.75		0
64QAM	1	0	14.16	0-2	0
	1	12	14.10		0
	1	24	14.20		0
	12	0	13.93	0-3	0
	12	6	13.91		0
	12	13	13.92		0
	25	0	13.89		0

Note: LTE Band 30 at 5 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: BCGA2014		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 91 of 195

8.3.11 LTE Band 7

Table 8-115
LTE Band 7 Reduced Conducted Powers - 20 MHz Bandwidth- Antenna 4A

LTE Band 7 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20850 (2510.0 MHz)	21100 (2535.0 MHz)	21350 (2560.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.29	14.21	14.12	0	0
	1	50	14.16	14.19	14.11		0
	1	99	14.23	14.15	14.10		0
	50	0	14.25	14.22	14.05	0-1	0
	50	25	14.22	14.14	14.13		0
	50	50	14.17	14.08	14.05		0
	100	0	14.11	14.18	14.21		0
16QAM	1	0	14.24	14.12	13.92	0-1	0
	1	50	14.09	14.08	14.00		0
	1	99	14.20	14.08	14.04		0
	50	0	13.96	13.92	13.76	0-2	0
	50	25	13.94	13.86	13.82		0
	50	50	13.91	13.83	13.81		0
	100	0	13.97	13.92	13.88		0
64QAM	1	0	14.23	14.12	13.98	0-2	0
	1	50	14.17	14.07	14.01		0
	1	99	14.23	14.08	14.04		0
	50	0	13.96	13.93	13.77	0-3	0
	50	25	13.95	13.88	13.80		0
	50	50	13.90	13.84	13.82		0
	100	0	13.97	13.89	13.87		0

Table 8-116
LTE Band 7 Reduced Conducted Powers - 15 MHz Bandwidth- Antenna 4A

LTE Band 7 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20825 (2507.5 MHz)	21100 (2535.0 MHz)	21375 (2562.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.24	14.19	14.01	0	0
	1	36	14.27	14.17	14.14		0
	1	74	14.16	14.13	14.08		0
	36	0	14.23	14.21	14.05	0-1	0
	36	18	14.25	14.19	14.12		0
	36	37	14.26	14.07	14.09		0
	75	0	14.27	14.20	14.13		0
16QAM	1	0	14.24	14.18	14.07	0-1	0
	1	36	14.25	14.16	14.06		0
	1	74	14.15	14.11	13.99		0
	36	0	14.02	14.02	13.88	0-2	0
	36	18	14.05	13.98	13.92		0
	36	37	14.03	13.91	13.83		0
	75	0	14.07	13.99	13.93		0
64QAM	1	0	14.28	14.19	14.01	0-2	0
	1	36	14.27	14.19	14.08		0
	1	74	14.20	14.16	14.03		0
	36	0	14.02	14.02	13.86	0-3	0
	36	18	14.03	13.99	13.94		0
	36	37	14.04	13.92	13.85		0
	75	0	14.07	13.98	13.93		0

FCC ID: BCGA2014	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device		Page 92 of 195

Table 8-117
LTE Band 7 Reduced Conducted Powers - 10 MHz Bandwidth- Antenna 4A

LTE Band 7 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20800 (2505.0 MHz)	21100 (2535.0 MHz)	21400 (2565.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.29	14.18	14.09	0	0
	1	25	14.25	14.14	14.06		0
	1	49	14.30	14.08	14.09		0
	25	0	14.24	14.13	14.11	0-1	0
	25	12	14.23	14.14	14.07		0
	25	25	14.24	14.12	14.08		0
	50	0	14.23	14.15	14.08		0
16QAM	1	0	14.27	14.06	13.98	0-1	0
	1	25	14.23	14.02	13.93		0
	1	49	14.21	13.98	13.97		0
	25	0	13.98	13.87	13.79	0-2	0
	25	12	14.02	13.83	13.73		0
	25	25	14.01	13.85	13.75		0
	50	0	14.00	13.84	13.74		0
64QAM	1	0	14.27	14.10	14.01	0-2	0
	1	25	14.28	14.04	13.94		0
	1	49	14.26	14.00	13.99		0
	25	0	14.01	13.91	13.81	0-3	0
	25	12	14.04	13.85	13.75		0
	25	25	14.04	13.89	13.76		0
	50	0	14.06	13.88	13.77		0

Table 8-118
LTE Band 7 Reduced Conducted Powers - 5 MHz Bandwidth- Antenna 4A

LTE Band 7 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20775 (2502.5 MHz)	21100 (2535.0 MHz)	21425 (2567.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.25	14.09	13.87	0	0
	1	12	14.16	14.08	13.88		0
	1	24	14.20	14.05	13.90		0
	12	0	14.14	14.09	13.89	0-1	0
	12	6	14.13	14.05	13.88		0
	12	13	14.14	14.03	13.87		0
	25	0	14.14	14.10	13.90		0
16QAM	1	0	14.25	14.01	13.77	0-1	0
	1	12	14.15	14.04	13.79		0
	1	24	14.18	14.05	13.78		0
	12	0	13.97	13.88	13.65	0-2	0
	12	6	13.96	13.83	13.64		0
	12	13	13.94	13.78	13.62		0
	25	0	13.93	13.83	13.64		0
64QAM	1	0	14.27	14.03	13.81	0-2	0
	1	12	14.16	14.02	13.84		0
	1	24	14.18	14.03	13.87		0
	12	0	13.98	13.85	13.66	0-3	0
	12	6	13.98	13.86	13.64		0
	12	13	13.99	13.83	13.62		0
	25	0	13.97	13.88	13.64		0

FCC ID: BCGA2014	 SAR EVALUATION REPORT			Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device		Page 93 of 195

Table 8-119
LTE Band 7 Reduced Conducted Powers - 20 MHz Bandwidth- Antenna 4B

LTE Band 7 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20850 (2510.0 MHz)	21100 (2535.0 MHz)	21350 (2560.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	12.14	12.28	12.01	0	0
	1	50	12.12	12.19	11.92		0
	1	99	12.12	12.06	11.94		0
	50	0	12.16	12.22	11.97	0-1	0
	50	25	12.13	12.12	12.09		0
	50	50	12.10	12.03	11.96		0
	100	0	12.15	12.16	12.02		0
16QAM	1	0	12.20	12.30	12.19	0-1	0
	1	50	12.30	12.27	12.29		0
	1	99	12.28	12.21	12.22		0
	50	0	11.98	12.07	12.03	0-2	0
	50	25	12.08	12.09	12.12		0
	50	50	12.10	12.03	12.05		0
	100	0	12.13	12.10	12.16		0
64QAM	1	0	12.29	12.22	12.25	0-2	0
	1	50	12.30	12.21	12.29		0
	1	99	12.30	12.17	12.23		0
	50	0	12.01	12.04	12.03	0-3	0
	50	25	12.10	12.05	12.09		0
	50	50	12.08	12.03	12.04		0
	100	0	12.13	12.08	12.14		0

Table 8-120
LTE Band 7 Reduced Conducted Powers - 15 MHz Bandwidth- Antenna 4B

LTE Band 7 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20825 (2507.5 MHz)	21100 (2535.0 MHz)	21375 (2562.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	12.14	12.30	12.11	0	0
	1	36	12.21	12.27	12.20		0
	1	74	12.19	12.24	12.12		0
	36	0	12.18	12.29	12.13	0-1	0
	36	18	12.21	12.30	12.17		0
	36	37	12.19	12.22	12.06		0
	75	0	12.18	12.24	12.18		0
16QAM	1	0	12.16	12.30	12.13	0-1	0
	1	36	12.18	12.29	12.14		0
	1	74	12.22	12.25	12.05		0
	36	0	12.03	12.12	11.94	0-2	0
	36	18	12.06	12.09	11.92		0
	36	37	12.05	12.04	11.86		0
	75	0	12.02	12.08	11.97		0
64QAM	1	0	12.19	12.30	12.15	0-2	0
	1	36	12.26	12.29	12.17		0
	1	74	12.21	12.25	12.10		0
	36	0	12.02	12.19	11.90	0-3	0
	36	18	12.05	12.15	11.92		0
	36	37	12.03	12.02	11.88		0
	75	0	12.01	12.09	11.94		0

FCC ID: BCGA2014	 SAR EVALUATION REPORT			Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device		Page 94 of 195

Table 8-121
LTE Band 7 Reduced Conducted Powers - 10 MHz Bandwidth- Antenna 4B

LTE Band 7 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20800 (2505.0 MHz)	21100 (2535.0 MHz)	21400 (2565.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	12.19	12.30	12.17	0	0
	1	25	12.27	12.25	12.00		0
	1	49	12.30	12.22	12.07		0
	25	0	12.18	12.29	12.12	0-1	0
	25	12	12.23	12.30	12.03		0
	25	25	12.19	12.27	12.01		0
	50	0	12.23	12.25	12.06		0
16QAM	1	0	12.19	12.30	12.14	0-1	0
	1	25	12.22	12.29	12.00		0
	1	49	12.30	12.12	12.07		0
	25	0	12.00	12.09	11.92	0-2	0
	25	12	12.02	12.10	11.87		0
	25	25	12.05	12.14	11.83		0
	50	0	12.00	12.09	11.86		0
64QAM	1	0	12.24	12.30	12.08	0-2	0
	1	25	12.29	12.29	12.00		0
	1	49	12.30	12.27	12.13		0
	25	0	11.98	12.10	11.91	0-3	0
	25	12	12.02	12.09	11.88		0
	25	25	12.07	12.12	11.86		0
	50	0	12.04	12.05	11.91		0

Table 8-122
LTE Band 7 Reduced Conducted Powers - 5 MHz Bandwidth- Antenna 4B

LTE Band 7 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20775 (2502.5 MHz)	21100 (2535.0 MHz)	21425 (2567.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	12.25	12.30	11.94	0	0
	1	12	12.26	12.27	11.92		0
	1	24	12.30	12.29	12.00		0
	12	0	12.20	12.30	11.94	0-1	0
	12	6	12.19	12.29	11.92		0
	12	13	12.24	12.28	12.00		0
	25	0	12.23	12.27	11.93		0
16QAM	1	0	12.28	12.30	11.91	0-1	0
	1	12	12.25	12.29	11.88		0
	1	24	12.29	12.30	11.99		0
	12	0	12.06	12.18	11.77	0-2	0
	12	6	12.08	12.17	11.75		0
	12	13	12.10	12.15	11.78		0
	25	0	12.06	12.12	11.76		0
64QAM	1	0	12.29	12.27	11.92	0-2	0
	1	12	12.28	12.30	11.96		0
	1	24	12.26	12.30	11.98		0
	12	0	12.04	12.15	11.76	0-3	0
	12	6	12.02	12.16	11.74		0
	12	13	12.06	12.20	11.79		0
	25	0	12.05	12.11	11.75		0

FCC ID: BCGA2014		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 95 of 195

Table 8-123
LTE Band 7 Reduced Conducted Powers - 20 MHz Bandwidth- Antenna 2A

LTE Band 7 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20850 (2510.0 MHz)	21100 (2535.0 MHz)	21350 (2560.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.10	14.08	13.85	0	0
	1	50	14.09	14.00	13.92		0
	1	99	14.05	14.00	13.96		0
	50	0	14.10	14.09	14.03	0-1	0
	50	25	14.08	14.00	14.00		0
	50	50	14.07	14.02	14.05		0
	100	0	14.09	14.02	14.08		0
16QAM	1	0	13.92	13.81	13.59	0-1	0
	1	50	14.07	13.82	13.63		0
	1	99	13.99	13.69	13.49		0
	50	0	13.79	13.69	13.45	0-2	0
	50	25	13.83	13.66	13.49		0
	50	50	13.83	13.59	13.50		0
	100	0	13.88	13.69	13.55		0
64QAM	1	0	13.94	13.84	13.66	0-2	0
	1	50	14.10	13.85	13.80		0
	1	99	14.09	13.81	13.80		0
	50	0	13.82	13.64	13.45	0-3	0
	50	25	13.90	13.64	13.57		0
	50	50	13.86	13.62	13.59		0
	100	0	13.92	13.66	13.61		0

Table 8-124
LTE Band 7 Reduced Conducted Powers - 15 MHz Bandwidth- Antenna 2A

LTE Band 7 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20825 (2507.5 MHz)	21100 (2535.0 MHz)	21375 (2562.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	13.82	13.71	13.70	0	0
	1	36	13.89	13.70	13.78		0
	1	74	13.89	13.60	13.68		0
	36	0	13.91	13.73	13.62	0-1	0
	36	18	13.96	13.73	13.66		0
	36	37	14.00	13.69	13.61		0
	75	0	13.96	13.74	13.66		0
16QAM	1	0	13.91	13.73	13.53	0-1	0
	1	36	14.07	13.69	13.63		0
	1	74	14.00	13.58	13.52		0
	36	0	13.74	13.51	13.41	0-2	0
	36	18	13.82	13.50	13.39		0
	36	37	13.86	13.45	13.32		0
	75	0	13.79	13.51	13.40		0
64QAM	1	0	13.98	13.79	13.65	0-2	0
	1	36	14.08	14.10	13.83		0
	1	74	14.09	13.79	13.76		0
	36	0	13.81	13.62	13.55	0-3	0
	36	18	13.86	13.63	13.59		0
	36	37	13.94	13.61	13.57		0
	75	0	13.88	13.64	13.57		0

FCC ID: BCGA2014	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device		Page 96 of 195

Table 8-125
LTE Band 7 Reduced Conducted Powers - 10 MHz Bandwidth- Antenna 2A

LTE Band 7 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20800 (2505.0 MHz)	21100 (2535.0 MHz)	21400 (2565.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	13.82	13.74	13.62	0	0
	1	25	13.86	13.70	13.53		0
	1	49	13.93	13.66	13.49		0
	25	0	13.83	13.75	13.63	0-1	0
	25	12	13.90	13.72	13.60		0
	25	25	13.94	13.70	13.55		0
	50	0	13.91	13.74	13.61		0
16QAM	1	0	13.94	13.81	13.68	0-1	0
	1	25	14.07	13.68	13.55		0
	1	49	14.08	13.69	13.52		0
	25	0	13.62	13.49	13.39	0-2	0
	25	12	13.64	13.50	13.34		0
	25	25	13.70	13.50	13.31		0
	50	0	13.66	13.51	13.36		0
64QAM	1	0	13.98	13.83	13.81	0-2	0
	1	25	14.05	13.85	13.80		0
	1	49	14.10	13.85	13.74		0
	25	0	13.73	13.62	13.57	0-3	0
	25	12	13.79	13.62	13.56		0
	25	25	13.85	13.63	13.54		0
	50	0	13.80	13.64	13.56		0

Table 8-126
LTE Band 7 Reduced Conducted Powers - 5 MHz Bandwidth- Antenna 2A

LTE Band 7 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20775 (2502.5 MHz)	21100 (2535.0 MHz)	21425 (2567.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.05	14.01	13.91	0	0
	1	12	14.01	14.10	13.85		0
	1	24	14.02	14.00	13.84		0
	12	0	14.02	14.00	13.89	0-1	0
	12	6	14.09	14.01	13.86		0
	12	13	14.05	14.00	13.83		0
	25	0	14.10	14.02	13.85		0
16QAM	1	0	14.10	13.99	14.02	0-1	0
	1	12	14.04	13.98	13.91		0
	1	24	14.03	13.89	13.86		0
	12	0	13.90	13.85	13.63	0-2	0
	12	6	13.94	13.84	13.59		0
	12	13	14.00	13.88	13.58		0
	25	0	13.92	13.80	13.62		0
64QAM	1	0	14.10	14.05	14.03	0-2	0
	1	12	14.09	14.01	14.02		0
	1	24	14.10	14.02	14.01		0
	12	0	14.04	13.96	13.80	0-3	0
	12	6	14.08	13.95	13.79		0
	12	13	14.04	13.95	13.78		0
	25	0	14.07	13.93	13.79		0

FCC ID: BCGA2014		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 97 of 195

Table 8-127
LTE Band 7 Reduced Conducted Powers - 20 MHz Bandwidth- Antenna 2B

LTE Band 7 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20850 (2510.0 MHz)	21100 (2535.0 MHz)	21350 (2560.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	12.98	12.96	12.80	0	0
	1	50	12.93	12.94	12.89		0
	1	99	12.90	12.93	12.96		0
	50	0	12.98	12.86	12.86	0-1	0
	50	25	12.93	12.82	12.92		0
	50	50	12.89	12.75	12.95		0
	100	0	12.94	12.85	12.88		0
16QAM	1	0	12.96	12.97	12.85	0-1	0
	1	50	12.98	12.95	12.74		0
	1	99	12.94	12.99	12.89		0
	50	0	12.82	12.81	12.72	0-2	0
	50	25	12.81	12.76	12.80		0
	50	50	12.76	12.78	12.81		0
	100	0	12.86	12.83	12.83		0
64QAM	1	0	12.90	12.84	12.77	0-2	0
	1	50	12.96	12.87	12.91		0
	1	99	13.00	12.94	12.96		0
	50	0	12.72	12.67	12.59	0-3	0
	50	25	12.72	12.64	12.66		0
	50	50	12.71	12.67	12.71		0
	100	0	12.78	12.68	12.70		0

Table 8-128
LTE Band 7 Reduced Conducted Powers - 15 MHz Bandwidth- Antenna 2B

LTE Band 7 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20825 (2507.5 MHz)	21100 (2535.0 MHz)	21375 (2562.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	12.95	12.75	12.77	0	0
	1	36	13.00	12.75	12.83		0
	1	74	12.99	12.73	12.79		0
	36	0	12.83	12.81	12.87	0-1	0
	36	18	12.87	12.79	12.92		0
	36	37	12.88	12.80	12.90		0
	75	0	12.91	12.82	12.92		0
16QAM	1	0	12.94	12.89	12.93	0-1	0
	1	36	12.98	12.93	12.97		0
	1	74	13.00	12.85	12.92		0
	36	0	12.82	12.68	12.73	0-2	0
	36	18	12.78	12.66	12.76		0
	36	37	12.75	12.64	12.73		0
	75	0	12.80	12.68	12.77		0
64QAM	1	0	12.84	12.87	12.83	0-2	0
	1	36	12.97	12.86	12.93		0
	1	74	12.99	12.85	12.88		0
	36	0	12.68	12.68	12.62	0-3	0
	36	18	12.72	12.65	12.67		0
	36	37	12.77	12.66	12.67		0
	75	0	12.76	12.66	12.66		0

FCC ID: BCGA2014	 SAR EVALUATION REPORT			Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device		Page 98 of 195

Table 8-129
LTE Band 7 Reduced Conducted Powers - 10 MHz Bandwidth- Antenna 2B

LTE Band 7 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20800 (2505.0 MHz)	21100 (2535.0 MHz)	21400 (2565.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	12.75	12.80	12.80	0	0
	1	25	12.76	12.76	12.77		0
	1	49	12.90	12.77	12.78		0
	25	0	12.82	12.79	12.87	0-1	0
	25	12	12.87	12.80	12.86		0
	25	25	12.88	12.82	12.84		0
	50	0	12.91	12.82	12.86		0
16QAM	1	0	12.92	12.97	12.99	0-1	0
	1	25	12.99	12.98	12.94		0
	1	49	13.00	12.92	13.00		0
	25	0	12.67	12.67	12.73	0-2	0
	25	12	12.73	12.68	12.71		0
	25	25	12.75	12.70	12.70		0
	50	0	12.75	12.67	12.71		0
64QAM	1	0	12.92	12.65	12.87	0-2	0
	1	25	12.89	12.65	12.85		0
	1	49	13.00	12.63	12.92		0
	25	0	12.63	12.64	12.64	0-3	0
	25	12	12.69	12.64	12.66		0
	25	25	12.70	12.64	12.64		0
	50	0	12.72	12.63	12.63		0

Table 8-130
LTE Band 7 Reduced Conducted Powers - 5 MHz Bandwidth- Antenna 2B

LTE Band 7 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20775 (2502.5 MHz)	21100 (2535.0 MHz)	21425 (2567.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	12.81	12.90	12.86	0	0
	1	12	12.72	12.88	12.84		0
	1	24	12.81	12.94	12.85		0
	12	0	12.84	12.82	12.88	0-1	0
	12	6	12.83	12.82	12.84		0
	12	13	12.85	12.83	12.83		0
	25	0	12.84	12.83	12.85		0
16QAM	1	0	12.87	12.84	13.00	0-1	0
	1	12	12.86	12.85	12.98		0
	1	24	12.89	12.87	12.99		0
	12	0	12.75	12.71	12.72	0-2	0
	12	6	12.77	12.73	12.74		0
	12	13	12.75	12.74	12.70		0
	25	0	12.73	12.71	12.73		0
64QAM	1	0	12.90	12.87	12.89	0-2	0
	1	12	12.90	12.86	12.83		0
	1	24	12.98	12.90	12.92		0
	12	0	12.66	12.66	12.66	0-3	0
	12	6	12.67	12.66	12.63		0
	12	13	12.72	12.68	12.65		0
	25	0	12.67	12.66	12.65		0

FCC ID: BCGA2014	 SAR EVALUATION REPORT			Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device		Page 99 of 195

8.3.12 LTE Band 41

Table 8-131
LTE Band 41 PC3 Reduced Conducted Powers - 20 MHz Bandwidth- Antenna 4A

LTE Band 41 20 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	17.29	17.05	17.03	16.80	16.79	0	0
	1	50	17.22	17.00	16.95	16.76	16.75		0
	1	99	17.20	17.03	16.85	16.81	16.71		0
	50	0	17.16	17.00	16.93	16.76	16.72	0-1	0
	50	25	17.15	16.96	16.91	16.79	16.70		0
	50	50	17.21	16.95	16.90	16.78	16.70		0
	100	0	17.17	16.96	16.93	16.78	16.74		0
16QAM	1	0	16.96	17.14	17.19	17.17	16.99	0-1	0
	1	50	17.23	17.20	17.20	17.12	16.96		0
	1	99	17.26	17.19	17.30	17.15	17.02		0
	50	0	16.62	16.86	16.89	16.86	16.67	0-2	0
	50	25	16.84	16.85	16.90	16.84	16.66		0
	50	50	16.94	16.87	16.92	16.85	16.68		0
	100	0	16.83	16.89	16.93	16.87	16.69		0
64QAM	1	0	16.92	16.94	16.97	16.91	16.76	0-2	0
	1	50	17.17	16.94	16.96	16.90	16.75		0
	1	99	17.25	16.95	17.09	16.93	16.81		0
	50	0	16.81	16.86	16.89	16.87	16.69	0-3	0
	50	25	17.02	16.85	16.91	16.86	16.68		0
	50	50	17.14	16.87	16.92	16.87	16.68		0
	100	0	17.02	16.89	16.93	16.87	16.70		0

Table 8-132
LTE Band 41 PC3 Reduced Conducted Powers - 15 MHz Bandwidth- Antenna 4A

LTE Band 41 15 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	17.02	17.02	17.03	17.04	16.87	0	0
	1	36	17.28	17.05	17.06	17.06	16.88		0
	1	74	17.29	17.04	17.07	17.06	16.87		0
	36	0	17.07	17.02	17.02	17.03	16.85	0-1	0
	36	18	17.22	17.03	17.03	17.05	16.86		0
	36	37	17.26	17.03	17.04	17.02	16.86		0
	75	0	17.15	17.04	17.07	17.05	16.87	0	
16QAM	1	0	16.97	17.14	17.17	17.07	16.96	0-1	0
	1	36	17.17	17.18	17.17	17.09	16.98		0
	1	74	17.23	17.16	17.15	17.11	16.99		0
	36	0	16.67	16.85	16.87	16.83	16.66	0-2	0
	36	18	16.82	16.86	16.91	16.86	16.67		0
	36	37	16.86	16.85	16.90	16.84	16.68		0
	75	0	16.77	16.87	16.91	16.85	16.69	0	
64QAM	1	0	16.96	16.91	16.94	16.89	16.74	0-2	0
	1	36	17.19	16.96	16.93	16.90	16.76		0
	1	74	17.22	16.92	16.95	16.91	16.75		0
	36	0	16.92	16.86	16.88	16.85	16.67	0-3	0
	36	18	17.12	16.88	16.91	16.87	16.69		0
	36	37	17.15	16.87	16.90	16.85	16.68		0
	75	0	17.03	16.89	16.88	16.87	16.69	0	

FCC ID: BCGA2014		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 100 of 195

Table 8-133

LTE Band 41 PC3 Reduced Conducted Powers - 10 MHz Bandwidth- Antenna 4A

LTE Band 41 10 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	17.06	17.05	17.07	17.04	16.87	0	0
	1	25	17.19	17.03	17.05	17.01	16.85		0
	1	49	17.28	17.05	17.09	17.02	16.87		0
	25	0	17.08	17.02	17.03	17.00	16.80	0-1	0
	25	12	17.21	17.00	17.02	16.99	16.82		0
	25	25	17.22	17.01	17.05	17.00	16.81		0
	50	0	17.15	17.02	17.04	17.01	16.82		0
16QAM	1	0	17.01	17.14	17.14	17.15	16.95	0-1	0
	1	25	17.15	17.15	17.12	17.07	16.95		0
	1	49	17.22	17.16	17.18	17.09	16.94		0
	25	0	16.76	16.84	16.87	16.85	16.66	0-2	0
	25	12	16.88	16.85	16.87	16.84	16.64		0
	25	25	16.89	16.86	16.89	16.83	16.67		0
	50	0	16.82	16.86	16.88	16.87	16.69		0
64QAM	1	0	16.96	16.95	16.95	16.91	16.76	0-2	0
	1	25	17.12	16.94	16.93	16.90	16.75		0
	1	49	17.21	16.95	16.96	16.92	16.76		0
	25	0	16.95	16.84	16.87	16.84	16.66	0-3	0
	25	12	17.09	16.84	16.87	16.83	16.65		0
	25	25	17.07	16.86	16.88	16.82	16.65		0
	50	0	17.04	16.87	16.89	16.86	16.69		0

Table 8-134

LTE Band 41 PC3 Reduced Conducted Powers - 5 MHz Bandwidth- Antenna 4A

LTE Band 41 5 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	17.17	17.01	17.05	17.07	16.87	0	0
	1	12	17.20	16.99	17.04	17.05	16.85		0
	1	24	17.28	17.01	17.07	17.05	16.88		0
	12	0	17.18	16.98	17.02	17.04	16.84	0-1	0
	12	6	17.24	16.97	17.02	17.03	16.83		0
	12	13	17.23	16.98	17.03	17.02	16.83		0
	25	0	17.17	16.98	17.02	17.03	16.84		0
16QAM	1	0	17.15	17.14	17.18	17.14	17.01	0-1	0
	1	12	17.17	17.12	17.14	17.13	17.04		0
	1	24	17.25	17.14	17.15	17.11	17.05		0
	12	0	16.89	16.86	16.88	16.89	16.74	0-2	0
	12	6	16.95	16.85	16.89	16.88	16.73		0
	12	13	16.94	16.86	16.90	16.88	16.71		0
	25	0	16.87	16.86	16.92	16.90	16.72		0
64QAM	1	0	17.14	16.92	16.97	16.92	16.78	0-2	0
	1	12	17.16	16.91	16.94	16.94	16.76		0
	1	24	17.22	16.92	16.99	16.93	16.79		0
	12	0	17.12	16.88	16.93	16.94	16.73	0-3	0
	12	6	17.18	16.88	16.92	16.92	16.72		0
	12	13	17.17	16.87	16.94	16.91	16.74		0
	25	0	17.06	16.85	16.89	16.90	16.70		0

FCC ID: BCGA2014	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 101 of 195

Table 8-135
LTE Band 41 PC2 Reduced Conducted Powers - 20 MHz Bandwidth- Antenna 4A

LTE Band 41 20 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	17.30	16.98	17.00	16.76	16.90	0	0
	1	50	17.29	16.92	16.90	16.74	16.85		0
	1	99	17.28	16.94	16.80	16.77	16.82		0
	50	0	17.20	16.93	16.93	16.73	16.73	0-1	0
	50	25	17.16	16.90	16.91	16.75	16.70		0
	50	50	17.21	16.91	16.88	16.77	16.68		0
	100	0	17.18	16.94	16.90	16.78	16.70		0
16QAM	1	0	16.83	17.10	17.10	17.08	16.95	0-1	0
	1	50	17.21	17.12	17.11	17.03	16.94		0
	1	99	17.29	17.14	17.20	17.05	17.03		0
	50	0	16.45	16.70	16.67	16.63	16.49	0-2	0
	50	25	16.70	16.68	16.67	16.62	16.50		0
	50	50	16.78	16.69	16.68	16.63	16.51		0
	100	0	16.67	16.71	16.70	16.65	16.51		0
64QAM	1	0	16.69	17.00	16.97	16.95	16.81	0-2	0
	1	50	17.07	16.99	16.95	16.91	16.77		0
	1	99	17.15	17.00	17.10	16.95	16.85		0
	50	0	16.46	16.70	16.67	16.63	16.49	0-3	0
	50	25	16.70	16.68	16.68	16.63	16.48		0
	50	50	16.71	16.69	16.70	16.64	16.50		0
	100	0	16.68	16.70	16.69	16.65	16.51		0

Table 8-136
LTE Band 41 PC2 Reduced Conducted Powers - 15 MHz Bandwidth- Antenna 4A

LTE Band 41 15 MHz Bandwidth										
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]	
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)			
			Conducted Power [dBm]							
QPSK	1	0	16.91	17.15	17.11	17.09	16.94	0	0	
	1	36	17.21	17.16	17.14	17.10	16.96		0-1	0
	1	74	17.26	17.18	17.16	17.11	16.96			0
	36	0	16.93	17.09	17.06	17.03	16.87	0		
	36	18	17.11	17.09	17.08	17.05	16.89	0		0
	36	37	17.15	17.07	17.09	17.03	16.88		0	
	75	0	17.06	17.10	17.08	17.05	16.89		0	
16QAM	1	0	16.97	17.13	17.09	17.00	16.93	0-1	0	
	1	36	17.24	17.14	17.07	17.03	16.96		0-2	0
	1	74	17.27	17.09	17.07	17.02	16.95			0
	36	0	16.58	16.70	16.66	16.63	16.48	0		
	36	18	16.75	16.71	16.69	16.65	16.50	0		0
	36	37	16.79	16.69	16.69	16.63	16.49		0	
	75	0	16.70	16.70	16.69	16.64	16.50		0	
64QAM	1	0	16.80	16.98	16.97	16.92	16.75	0-2	0	
	1	36	17.08	17.01	16.98	16.94	16.81		0-3	0
	1	74	17.13	16.95	17.00	16.94	16.81			0
	36	0	16.58	16.71	16.68	16.64	16.49	0		
	36	18	16.77	16.71	16.69	16.66	16.50	0		0
	36	37	16.80	16.69	16.70	16.64	16.51		0	
	75	0	16.69	16.70	16.69	16.65	16.51		0	

FCC ID: BCGA2014		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 102 of 195

Table 8-137

LTE Band 41 PC2 Reduced Conducted Powers - 10 MHz Bandwidth- Antenna 4A

LTE Band 41 10 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	16.94	17.17	17.15	17.09	16.93	0	0
	1	25	17.15	17.14	17.14	17.06	16.91		0
	1	49	17.22	17.14	17.16	17.08	16.94		0
	25	0	16.93	17.05	17.04	17.01	16.83	0-1	0
	25	12	17.07	17.04	17.04	17.00	16.84		0
	25	25	17.08	17.05	17.05	17.00	16.84		0
	50	0	17.05	17.06	17.06	17.01	16.86		0
16QAM	1	0	17.00	17.17	17.12	17.08	16.91	0-1	0
	1	25	17.22	17.14	17.10	17.04	16.97		0
	1	49	17.29	17.13	17.12	17.05	16.94		0
	25	0	16.60	16.68	16.70	16.65	16.50	0-2	0
	25	12	16.74	16.68	16.68	16.64	16.50		0
	25	25	16.75	16.69	16.69	16.63	16.51		0
	50	0	16.72	16.69	16.69	16.64	16.50		0
64QAM	1	0	16.88	17.00	16.99	16.97	16.90	0-2	0
	1	25	17.07	16.98	16.95	16.91	16.81		0
	1	49	17.13	16.97	17.00	16.93	16.81		0
	25	0	16.61	16.68	16.68	16.65	16.49	0-3	0
	25	12	16.76	16.68	16.67	16.64	16.48		0
	25	25	16.75	16.69	16.70	16.64	16.50		0
	50	0	16.73	16.70	16.69	16.66	16.50		0

Table 8-138

LTE Band 41 PC2 Reduced Conducted Powers - 5 MHz Bandwidth- Antenna 4A

LTE Band 41 5 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	17.14	17.12	17.11	17.12	16.97	0	0
	1	12	17.20	17.11	17.13	17.12	16.96		0
	1	24	17.29	17.14	17.17	17.13	16.98		0
	12	0	17.11	17.03	17.03	17.04	16.87	0-1	0
	12	6	17.18	17.02	17.03	17.02	16.86		0
	12	13	17.17	17.03	17.04	17.02	16.87		0
	25	0	17.11	17.04	17.03	17.04	16.83		0
16QAM	1	0	17.16	17.12	17.11	17.08	16.99	0-1	0
	1	12	17.20	17.10	17.05	17.05	16.99		0
	1	24	17.24	17.11	17.08	17.07	17.01		0
	12	0	16.74	16.71	16.69	16.70	16.57	0-2	0
	12	6	16.80	16.69	16.68	16.69	16.56		0
	12	13	16.83	16.70	16.70	16.68	16.56		0
	25	0	16.74	16.67	16.68	16.68	16.55		0
64QAM	1	0	16.97	16.94	16.95	16.96	16.82	0-2	0
	1	12	17.06	16.96	16.94	16.93	16.81		0
	1	24	17.11	16.97	16.97	16.96	16.85		0
	12	0	16.77	16.72	16.71	16.72	16.59	0-3	0
	12	6	16.82	16.71	16.70	16.70	16.58		0
	12	13	16.85	16.71	16.72	16.70	16.58		0
	25	0	16.75	16.67	16.68	16.68	16.54		0

FCC ID: BCGA2014	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 103 of 195

Table 8-139
LTE Band 41 PC3 Reduced Conducted Powers - 20 MHz Bandwidth- Antenna 4B

LTE Band 41 20 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	16.20	15.84	15.74	15.72	15.65	0	0
	1	50	16.16	15.80	15.65	15.50	15.63		0
	1	99	16.15	15.75	15.63	15.51	15.66		0
	50	0	16.13	15.79	15.69	15.53	15.65	0-1	0
	50	25	16.19	15.81	15.69	15.49	15.63		0
	50	50	16.12	15.77	15.66	15.49	15.64		0
	100	0	16.18	15.83	15.70	15.50	15.65		0
16QAM	1	0	16.15	15.82	16.03	15.83	16.10	0-1	0
	1	50	16.09	15.82	16.03	15.81	16.12		0
	1	99	16.08	15.85	16.00	15.84	16.17		0
	50	0	15.75	15.60	15.79	15.59	15.81	0-2	0
	50	25	15.77	15.58	15.79	15.58	15.83		0
	50	50	15.78	15.62	15.82	15.61	15.88		0
	100	0	15.84	15.63	15.83	15.64	15.87		0
64QAM	1	0	15.93	15.68	15.86	15.66	15.86	0-2	0
	1	50	15.86	15.66	15.83	15.65	15.88		0
	1	99	15.87	15.68	15.85	15.70	16.01		0
	50	0	15.77	15.62	15.80	15.63	15.81	0-3	0
	50	25	15.79	15.60	15.79	15.60	15.83		0
	50	50	15.80	15.62	15.81	15.62	15.87		0
	100	0	15.85	15.64	15.82	15.64	15.86		0

Table 8-140
LTE Band 41 PC3 Reduced Conducted Powers - 15 MHz Bandwidth- Antenna 4B

LTE Band 41 15 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	16.16	16.03	16.08	15.91	16.05	0	0
	1	36	16.13	16.09	16.09	15.89	16.15		0
	1	74	16.14	16.05	16.07	15.93	16.17		0
	36	0	16.12	16.04	16.04	15.91	16.10	0-1	0
	36	18	16.13	16.10	16.07	15.90	16.14		0
	36	37	16.17	16.07	16.07	15.91	16.18		0
	75	0	16.20	16.09	16.09	15.92	16.15		0
16QAM	1	0	16.00	15.86	15.96	15.80	16.01	0-1	0
	1	36	15.97	15.82	16.00	15.77	16.08		0
	1	74	16.01	15.86	16.01	15.80	16.12		0
	36	0	15.70	15.57	15.74	15.58	15.79	0-2	0
	36	18	15.71	15.58	15.78	15.56	15.81		0
	36	37	15.78	15.57	15.77	15.57	15.82		0
	75	0	15.78	15.61	15.75	15.59	15.83		0
64QAM	1	0	15.82	15.63	15.80	15.61	15.85	0-2	0
	1	36	15.77	15.62	15.78	15.58	15.90		0
	1	74	15.79	15.62	15.79	15.62	15.92		0
	36	0	15.70	15.58	15.72	15.59	15.82	0-3	0
	36	18	15.70	15.57	15.75	15.57	15.85		0
	36	37	15.75	15.58	15.76	15.58	15.84		0
	75	0	15.79	15.58	15.75	15.58	15.84		0

FCC ID: BCGA2014		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 104 of 195

Table 8-141
LTE Band 41 PC3 Reduced Conducted Powers - 10 MHz Bandwidth- Antenna 4B

LTE Band 41 10 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	16.17	16.06	16.06	15.93	16.06	0	0
	1	25	16.19	16.06	16.04	15.87	16.06		0
	1	49	16.18	16.08	16.08	15.91	16.14		0
	25	0	16.10	16.04	16.04	15.89	16.05	0-1	0
	25	12	16.09	16.06	16.03	15.84	16.05		0
	25	25	16.16	16.04	16.05	15.86	16.06		0
	50	0	16.17	16.08	16.06	15.88	16.18		0
16QAM	1	0	16.03	16.04	16.03	15.85	16.02	0-1	0
	1	25	16.07	16.05	16.04	15.80	16.09		0
	1	49	16.02	16.06	16.06	15.82	16.15		0
	25	0	15.69	15.75	15.79	15.60	15.82	0-2	0
	25	12	15.68	15.79	15.79	15.58	15.83		0
	25	25	15.74	15.79	15.81	15.61	15.84		0
	50	0	15.77	15.81	15.80	15.60	15.84		0
64QAM	1	0	15.83	15.84	15.85	15.65	15.90	0-2	0
	1	25	15.86	15.86	15.85	15.63	15.88		0
	1	49	15.84	15.91	15.86	15.68	15.92		0
	25	0	15.69	15.75	15.78	15.62	15.81	0-3	0
	25	12	15.68	15.79	15.79	15.59	15.81		0
	25	25	15.74	15.79	15.81	15.60	15.83		0
	50	0	15.79	15.80	15.81	15.59	15.84		0

Table 8-142
LTE Band 41 PC3 Reduced Conducted Powers - 5 MHz Bandwidth- Antenna 4B

LTE Band 41 5 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	16.16	16.00	15.94	15.88	16.12	0	0
	1	12	16.13	16.02	15.97	15.85	16.13		0
	1	24	16.14	16.03	16.02	15.89	16.15		0
	12	0	16.10	16.04	15.98	15.86	16.11	0-1	0
	12	6	16.09	16.03	15.97	15.86	16.12		0
	12	13	16.12	16.03	15.98	15.87	16.12		0
	25	0	16.13	16.04	15.98	15.85	16.11		0
16QAM	1	0	16.11	15.92	16.00	15.84	16.12	0-1	0
	1	12	16.10	15.95	16.00	15.82	16.11		0
	1	24	16.11	15.97	16.05	15.87	16.13		0
	12	0	15.78	15.75	15.78	15.63	15.85	0-2	0
	12	6	15.76	15.74	15.78	15.62	15.85		0
	12	13	15.83	15.75	15.80	15.63	15.86		0
	25	0	15.82	15.73	15.77	15.64	15.85		0
64QAM	1	0	15.85	15.75	15.79	15.67	15.90	0-2	0
	1	12	15.89	15.79	15.79	15.65	15.90		0
	1	24	15.88	15.80	15.83	15.66	15.92		0
	12	0	15.78	15.76	15.78	15.64	15.86	0-3	0
	12	6	15.77	15.75	15.77	15.63	15.87		0
	12	13	15.83	15.75	15.80	15.64	15.87		0
	25	0	15.82	15.74	15.76	15.62	15.85		0

FCC ID: BCGA2014		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 105 of 195

Table 8-143
LTE Band 41 PC2 Reduced Conducted Powers - 20 MHz Bandwidth- Antenna 4B

LTE Band 41 20 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	16.20	15.84	15.79	15.62	15.63	0	0
	1	50	16.18	15.83	15.74	15.55	15.60		0
	1	99	16.15	15.80	15.67	15.54	15.61		0
	50	0	16.14	15.78	15.69	15.50	15.60	0-1	0
	50	25	16.16	15.79	15.65	15.49	15.60		0
	50	50	16.13	15.79	15.66	15.48	15.61		0
	100	0	16.15	15.82	15.66	15.50	15.63		0
16QAM	1	0	16.19	16.04	16.06	15.80	16.06	0-1	0
	1	50	16.14	16.03	16.03	15.84	16.13		0
	1	99	16.17	16.13	16.06	15.93	16.19		0
	50	0	15.69	15.64	15.64	15.48	15.70	0-2	0
	50	25	15.72	15.69	15.63	15.46	15.69		0
	50	50	15.74	15.69	15.69	15.49	15.72		0
	100	0	15.78	15.72	15.69	15.50	15.71		0
64QAM	1	0	16.07	15.92	15.93	15.74	15.92	0-2	0
	1	50	16.01	15.92	15.97	15.70	15.97		0
	1	99	16.03	15.98	15.91	15.80	16.04		0
	50	0	15.71	15.64	15.67	15.48	15.66	0-3	0
	50	25	15.74	15.69	15.68	15.46	15.68		0
	50	50	15.75	15.69	15.69	15.49	15.72		0
	100	0	15.78	15.73	15.70	15.50	15.71		0

Table 8-144
LTE Band 41 PC2 Reduced Conducted Powers - 15 MHz Bandwidth- Antenna 4B

LTE Band 41 15 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	16.18	16.08	16.07	15.93	16.06	0	0
	1	36	16.15	16.11	16.10	15.81	16.10		0
	1	74	16.15	16.09	16.11	15.92	16.13		0
	36	0	16.09	16.05	16.03	15.85	16.03	0-1	0
	36	18	16.09	16.09	16.05	15.86	16.07		0
	36	37	16.10	16.06	16.05	15.85	16.08		0
	75	0	16.14	16.09	16.06	15.89	16.08		0
16QAM	1	0	16.15	15.99	16.03	15.84	16.01	0-1	0
	1	36	16.08	16.02	16.05	15.82	16.07		0
	1	74	16.10	16.03	16.03	15.87	16.04		0
	36	0	15.68	15.62	15.66	15.48	15.68	0-2	0
	36	18	15.67	15.69	15.67	15.46	15.69		0
	36	37	15.71	15.67	15.67	15.45	15.68		0
	75	0	15.75	15.69	15.67	15.49	15.68		0
64QAM	1	0	16.02	15.88	15.92	15.75	15.93	0-2	0
	1	36	15.95	15.93	15.91	15.72	15.97		0
	1	74	15.98	15.91	15.93	15.77	16.00		0
	36	0	15.67	15.63	15.66	15.48	15.66	0-3	0
	36	18	15.66	15.69	15.68	15.48	15.69		0
	36	37	15.71	15.67	15.68	15.46	15.70		0
	75	0	15.74	15.69	15.67	15.50	15.72		0

FCC ID: BCGA2014		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 106 of 195

Table 8-145
LTE Band 41 PC2 Reduced Conducted Powers - 10 MHz Bandwidth- Antenna 4B

LTE Band 41 10 MHz Bandwidth										
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]	
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)			
			Conducted Power [dBm]							
QPSK	1	0	16.16	16.11	16.10	15.93	16.05	0	0	
	1	25	16.14	16.08	16.09	15.87	16.09		0-1	0
	1	49	16.13	16.11	16.09	15.92	16.16			0
	25	0	16.05	16.05	16.05	15.86	16.02	0		
	25	12	16.04	16.05	16.03	15.82	16.03	0		0
	25	25	16.07	16.04	16.01	15.85	16.05		0	
	50	0	16.09	16.08	16.05	15.85	16.06		0	
16QAM	1	0	16.10	16.03	16.06	15.90	16.04	0-1	0	
	1	25	16.14	16.04	16.07	15.83	16.08		0-2	0
	1	49	16.12	16.11	16.06	15.87	16.12			0
	25	0	15.65	15.63	15.66	15.50	15.67	0		
	25	12	15.65	15.67	15.66	15.47	15.68	0		0
	25	25	15.68	15.66	15.68	15.48	15.68		0	
	50	0	15.70	15.68	15.67	15.48	15.69		0	
64QAM	1	0	15.70	15.90	15.90	15.78	15.91	0-2	0	
	1	25	15.98	15.92	15.88	15.72	15.95		0-3	0
	1	49	15.97	15.96	15.96	15.76	15.97			0
	25	0	15.63	15.62	15.66	15.49	15.66	0		
	25	12	15.62	15.67	15.65	15.46	15.67	0		0
	25	25	15.68	15.67	15.67	15.47	15.68		0	
	50	0	15.71	15.68	15.64	15.48	15.68		0	

Table 8-146
LTE Band 41 PC2 Reduced Conducted Powers - 5 MHz Bandwidth- Antenna 4B

LTE Band 41 5 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	16.19	16.05	16.01	15.93	16.11	0	0
	1	12	16.17	16.07	16.02	15.91	16.12		0
	1	24	16.18	16.07	16.06	15.94	16.14		0
	12	0	16.10	16.04	15.98	15.87	16.06	0-1	0
	12	6	16.08	16.02	15.97	15.85	16.07		0
	12	13	16.11	16.02	15.97	15.86	16.06		0
	25	0	16.12	16.03	15.98	15.86	16.07		0
16QAM	1	0	16.14	16.01	16.03	15.89	16.11	0-1	0
	1	12	16.16	16.00	16.02	15.85	16.18		0
	1	24	16.18	16.03	16.08	15.87	16.20		0
	12	0	15.74	15.69	15.68	15.53	15.77	0-2	0
	12	6	15.73	15.68	15.69	15.51	15.79		0
	12	13	15.80	15.69	15.70	15.53	15.75		0
	25	0	15.77	15.67	15.68	15.50	15.76		0
64QAM	1	0	16.02	15.91	15.91	15.75	15.97	0-2	0
	1	12	16.03	15.90	15.92	15.74	15.98		0
	1	24	16.04	15.92	15.97	15.75	15.99		0
	12	0	15.75	15.71	15.70	15.54	15.80	0-3	0
	12	6	15.74	15.70	15.70	15.51	15.79		0
	12	13	15.81	15.68	15.71	15.53	15.80		0
	25	0	15.77	15.66	15.67	15.50	15.73		0

FCC ID: BCGA2014		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 107 of 195

Table 8-147

LTE Band 41 PC3 Reduced Conducted Powers - 20 MHz Bandwidth- Antenna 2A

LTE Band 41 20 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	17.49	17.32	17.35	17.50	17.37	0	0
	1	50	17.30	17.16	17.33	17.40	17.30		0
	1	99	17.41	17.21	17.41	17.36	17.36		0
	50	0	17.37	17.19	17.32	17.43	17.33	0-1	0
	50	25	17.28	17.16	17.31	17.38	17.30		0
	50	50	17.35	17.19	17.33	17.36	17.29		0
	100	0	17.23	17.17	17.33	17.38	17.28		0
16QAM	1	0	17.30	17.43	17.43	17.44	17.46	0-1	0
	1	50	17.34	17.47	17.45	17.41	17.43		0
	1	99	17.50	17.49	17.50	17.43	17.50		0
	50	0	17.09	17.20	17.16	17.14	17.17	0-2	0
	50	25	17.03	17.16	17.19	17.12	17.15		0
	50	50	17.18	17.23	17.20	17.13	17.20		0
	100	0	17.00	17.21	17.23	17.15	17.18		0
64QAM	1	0	17.28	17.35	17.33	17.33	17.32	0-2	0
	1	50	17.30	17.31	17.36	17.27	17.30		0
	1	99	17.43	17.36	17.41	17.28	17.43		0
	50	0	17.30	17.32	17.29	17.26	17.29	0-3	0
	50	25	17.22	17.28	17.35	17.23	17.27		0
	50	50	17.39	17.35	17.36	17.24	17.33		0
	100	0	17.20	17.31	17.37	17.27	17.29		0

Table 8-148

LTE Band 41 PC3 Reduced Conducted Powers - 15 MHz Bandwidth- Antenna 2A

LTE Band 41 15 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	17.50	17.41	17.40	17.41	17.41	0	0
	1	36	17.44	17.47	17.47	17.40	17.49		0
	1	74	17.49	17.46	17.46	17.39	17.48		0
	36	0	17.47	17.47	17.41	17.41	17.44	0-1	0
	36	18	17.43	17.46	17.49	17.40	17.49		0
	36	37	17.46	17.48	17.48	17.40	17.43		0
	75	0	17.33	17.47	17.49	17.41	17.45		0
16QAM	1	0	17.43	17.38	17.42	17.42	17.41	0-1	0
	1	36	17.33	17.40	17.50	17.39	17.48		0
	1	74	17.40	17.48	17.48	17.39	17.50		0
	36	0	17.08	17.17	17.15	17.15	17.19	0-2	0
	36	18	17.04	17.16	17.20	17.14	17.23		0
	36	37	17.08	17.21	17.20	17.13	17.19		0
	75	0	16.93	17.15	17.20	17.14	17.17		0
64QAM	1	0	17.43	17.32	17.31	17.28	17.28	0-2	0
	1	36	17.34	17.31	17.37	17.29	17.37		0
	1	74	17.41	17.34	17.36	17.27	17.37		0
	36	0	17.33	17.30	17.28	17.24	17.28	0-3	0
	36	18	17.30	17.28	17.35	17.24	17.33		0
	36	37	17.31	17.34	17.34	17.23	17.30		0
	75	0	17.20	17.28	17.35	17.25	17.29		0

FCC ID: BCGA2014	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 108 of 195

Table 8-149
LTE Band 41 PC3 Reduced Conducted Powers - 10 MHz Bandwidth- Antenna 2A

LTE Band 41 10 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	17.48	17.47	17.37	17.38	17.42	0	0
	1	25	17.35	17.43	17.46	17.33	17.40		0
	1	49	17.50	17.47	17.47	17.36	17.46		0
	25	0	17.45	17.43	17.45	17.35	17.43	0-1	0
	25	12	17.41	17.41	17.44	17.33	17.44		0
	25	25	17.45	17.44	17.45	17.34	17.40		0
	50	0	17.34	17.44	17.47	17.35	17.40		0
16QAM	1	0	17.42	17.47	17.45	17.40	17.46	0-1	0
	1	25	17.33	17.43	17.44	17.37	17.44		0
	1	49	17.43	17.48	17.47	17.37	17.46		0
	25	0	17.12	17.16	17.19	17.11	17.17	0-2	0
	25	12	17.08	17.15	17.18	17.09	17.20		0
	25	25	17.14	17.21	17.19	17.10	17.15		0
	50	0	17.02	17.17	17.21	17.11	17.15		0
64QAM	1	0	17.39	17.37	17.30	17.28	17.31	0-2	0
	1	25	17.26	17.31	17.33	17.25	17.28		0
	1	49	17.42	17.37	17.35	17.36	17.35		0
	25	0	17.32	17.26	17.30	17.22	17.26	0-3	0
	25	12	17.27	17.24	17.28	17.19	17.28		0
	25	25	17.32	17.31	17.29	17.21	17.26		0
	50	0	17.21	17.28	17.32	17.24	17.27		0

Table 8-150
LTE Band 41 PC3 Reduced Conducted Powers - 5 MHz Bandwidth- Antenna 2A

LTE Band 41 5 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	17.47	17.43	17.49	17.42	17.47	0	0
	1	12	17.33	17.40	17.48	17.38	17.44		0
	1	24	17.48	17.41	17.49	17.41	17.47		0
	12	0	17.40	17.40	17.47	17.38	17.45	0-1	0
	12	6	17.39	17.38	17.46	17.37	17.45		0
	12	13	17.39	17.39	17.46	17.38	17.43		0
	25	0	17.32	17.40	17.47	17.37	17.42		0
16QAM	1	0	17.45	17.43	17.46	17.44	17.49	0-1	0
	1	12	17.30	17.40	17.48	17.40	17.49		0
	1	24	17.41	17.38	17.46	17.44	17.46		0
	12	0	17.09	17.18	17.22	17.17	17.25	0-2	0
	12	6	17.08	17.17	17.23	17.16	17.26		0
	12	13	17.08	17.15	17.22	17.17	17.20		0
	25	0	17.00	17.15	17.21	17.16	17.17		0
64QAM	1	0	17.44	17.31	17.37	17.25	17.35	0-2	0
	1	12	17.30	17.28	17.35	17.29	17.32		0
	1	24	17.43	17.26	17.37	17.31	17.34		0
	12	0	17.32	17.25	17.33	17.28	17.33	0-3	0
	12	6	17.33	17.24	17.33	17.25	17.33		0
	12	13	17.33	17.24	17.34	17.26	17.29		0
	25	0	17.24	17.23	17.27	17.24	17.27		0

FCC ID: BCGA2014		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 109 of 195

Table 8-151
LTE Band 41 PC2 Reduced Conducted Powers - 20 MHz Bandwidth- Antenna 2A

LTE Band 41 20 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	17.49	17.27	17.28	17.50	17.41	0	0
	1	50	17.34	17.23	17.24	17.44	17.33		0
	1	99	17.43	17.26	17.36	17.43	17.38		0
	50	0	17.33	17.20	17.30	17.45	17.31	0-1	0
	50	25	17.23	17.15	17.29	17.40	17.25		0
	50	50	17.32	17.17	17.30	17.36	17.25		0
	100	0	17.25	17.15	17.30	17.39	17.24		0
16QAM	1	0	17.30	17.30	17.35	17.33	17.32	0-1	0
	1	50	17.36	17.33	17.34	17.28	17.38		0
	1	99	17.50	17.37	17.45	17.33	17.49		0
	50	0	16.93	16.95	16.92	16.88	16.92	0-2	0
	50	25	16.92	16.92	16.99	16.86	16.93		0
	50	50	17.06	16.96	17.00	16.87	16.98		0
	100	0	16.88	16.95	17.02	16.90	16.95		0
64QAM	1	0	17.26	17.27	17.27	17.27	17.22	0-2	0
	1	50	17.31	17.26	17.25	17.20	17.19		0
	1	99	17.46	17.31	17.36	17.22	17.31		0
	50	0	17.09	17.04	17.01	16.97	16.98	0-3	0
	50	25	17.03	17.01	17.03	16.95	16.94		0
	50	50	17.17	17.07	17.04	16.96	17.00		0
	100	0	17.00	17.03	17.05	16.97	16.97		0

Table 8-152
LTE Band 41 PC2 Reduced Conducted Powers - 15 MHz Bandwidth- Antenna 2A

LTE Band 41 15 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	17.46	17.45	17.44	17.41	17.44	0	0
	1	36	17.37	17.49	17.50	17.40	17.50		0
	1	74	17.47	17.49	17.49	17.40	17.50		0
	36	0	17.41	17.47	17.41	17.37	17.44	0-1	0
	36	18	17.34	17.46	17.49	17.36	17.48		0
	36	37	17.38	17.47	17.48	17.35	17.43		0
	75	0	17.27	17.45	17.49	17.37	17.42		0
16QAM	1	0	17.45	17.35	17.36	17.33	17.36	0-1	0
	1	36	17.38	17.39	17.41	17.34	17.44		0
	1	74	17.49	17.41	17.40	17.31	17.47		0
	36	0	17.01	16.99	16.96	16.92	16.96	0-2	0
	36	18	16.94	16.97	17.04	16.92	17.00		0
	36	37	17.00	17.02	17.03	16.91	16.99		0
	75	0	16.89	16.97	17.03	16.91	16.97		0
64QAM	1	0	17.45	17.21	17.25	17.23	17.22	0-2	0
	1	36	17.35	17.27	17.28	17.21	17.28		0
	1	74	17.42	17.29	17.26	17.20	17.29		0
	36	0	17.12	17.02	17.00	16.98	17.01	0-3	0
	36	18	17.08	17.01	17.04	16.97	17.05		0
	36	37	17.10	17.06	17.03	16.96	16.99		0
	75	0	17.00	17.01	17.04	16.98	16.97		0

FCC ID: BCGA2014		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 110 of 195

Table 8-153

LTE Band 41 PC2 Reduced Conducted Powers - 10 MHz Bandwidth- Antenna 2A

LTE Band 41 10 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	17.44	17.50	17.44	17.42	17.47	0	0
	1	25	17.33	17.47	17.49	17.37	17.42		0
	1	49	17.47	17.49	17.50	17.40	17.48		0
	25	0	17.37	17.44	17.46	17.35	17.42	0-1	0
	25	12	17.31	17.42	17.45	17.33	17.44		0
	25	25	17.39	17.45	17.46	17.34	17.40		0
	50	0	17.28	17.45	17.48	17.35	17.40		0
16QAM	1	0	17.44	17.44	17.41	17.34	17.40	0-1	0
	1	25	17.36	17.40	17.39	17.35	17.37		0
	1	49	17.48	17.46	17.41	17.34	17.41		0
	25	0	16.99	16.99	17.00	16.94	17.00	0-2	0
	25	12	16.93	16.92	16.99	16.92	17.01		0
	25	25	17.02	17.03	17.00	16.93	16.96		0
	50	0	16.91	16.98	17.01	16.94	16.92		0
64QAM	1	0	17.42	17.27	17.25	17.23	17.25	0-2	0
	1	25	17.30	17.25	17.26	17.20	17.20		0
	1	49	17.43	17.30	17.28	17.22	17.26		0
	25	0	17.12	16.98	17.01	16.95	16.99	0-3	0
	25	12	17.07	16.96	17.00	16.94	17.00		0
	25	25	17.12	17.03	17.01	16.95	16.95		0
	50	0	17.02	16.99	17.02	16.96	16.96		0

Table 8-154

LTE Band 41 PC2 Reduced Conducted Powers - 5 MHz Bandwidth- Antenna 2A

LTE Band 41 5 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	17.49	17.40	17.50	17.45	17.50	0	0
	1	12	17.37	17.45	17.49	17.41	17.45		0
	1	24	17.50	17.44	17.50	17.45	17.47		0
	12	0	17.36	17.40	17.44	17.38	17.46	0-1	0
	12	6	17.36	17.39	17.44	17.35	17.47		0
	12	13	17.38	17.38	17.45	17.36	17.41		0
	25	0	17.31	17.40	17.44	17.39	17.40		0
16QAM	1	0	17.48	17.39	17.40	17.42	17.46	0-1	0
	1	12	17.36	17.36	17.35	17.38	17.41		0
	1	24	17.44	17.33	17.37	17.41	17.40		0
	12	0	17.01	17.00	17.03	17.01	17.06	0-2	0
	12	6	17.00	16.99	17.02	16.99	17.08		0
	12	13	17.03	16.97	17.04	16.99	17.01		0
	25	0	16.92	16.96	17.00	16.97	16.98		0
64QAM	1	0	17.44	17.22	17.25	17.26	17.28	0-2	0
	1	12	17.33	17.20	17.23	17.23	17.20		0
	1	24	17.43	17.19	17.24	17.24	17.23		0
	12	0	17.15	16.99	17.03	17.02	17.07	0-3	0
	12	6	17.16	16.98	17.03	17.00	17.08		0
	12	13	17.16	16.97	17.04	16.99	17.01		0
	25	0	17.05	16.94	17.00	16.97	16.96		0

FCC ID: BCGA2014	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 111 of 195

Table 8-155
LTE Band 41 PC3 Reduced Conducted Powers - 20 MHz Bandwidth- Antenna 2B

LTE Band 41 20 MHz Bandwidth										
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]	
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)			
			Conducted Power [dBm]							
QPSK	1	0	15.55	15.31	15.38	15.34	15.08	0	0	
	1	50	15.50	15.29	15.37	15.24	15.07		0-1	0
	1	99	15.58	15.41	15.38	15.26	15.16			0
	50	0	15.38	15.20	15.37	15.00	15.11	0		
	50	25	15.42	15.21	15.38	15.30	15.12	0		0
	50	50	15.48	15.26	15.39	15.29	15.14		0	
	100	0	15.43	15.22	15.40	15.34	15.16		0	
16QAM	1	0	15.44	15.44	15.39	15.13	15.12	0-1	0	
	1	50	15.53	15.51	15.33	15.12	15.08		0-2	0
	1	99	15.56	15.52	15.36	15.23	15.11			0
	50	0	15.12	15.19	15.12	14.85	14.82	0		0
	50	25	15.20	15.24	15.09	14.87	14.81			0
	50	50	15.22	15.23	15.09	14.91	14.81		0	
	100	0	15.25	15.25	15.12	14.92	14.84	0		
64QAM	1	0	15.36	15.35	15.37	15.07	15.05	0-2	0	
	1	50	15.41	15.39	15.32	15.09	15.01		0-3	0
	1	99	15.45	15.41	15.30	15.19	15.06			0
	50	0	15.24	15.29	15.27	15.02	14.95	0		
	50	25	15.32	15.34	15.25	15.03	14.94	0		
	50	50	15.34	15.34	15.24	15.06	14.95		0	
	100	0	15.38	15.37	15.26	15.06	14.96	0		

Table 8-156
LTE Band 41 PC3 Reduced Conducted Powers - 15 MHz Bandwidth- Antenna 2B

LTE Band 41 15 MHz Bandwidth										
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]	
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)			
			Conducted Power [dBm]							
QPSK	1	0	15.44	15.44	15.43	15.15	15.11	0	0	
	1	36	15.45	15.54	15.42	15.20	15.12		0-1	0
	1	74	15.53	15.50	15.40	15.25	15.12			0
	36	0	15.40	15.44	15.41	15.17	15.10	0		
	36	18	15.44	15.52	15.41	15.20	15.11	0		0
	36	37	15.50	15.51	15.38	15.21	15.10		0	
	75	0	15.52	15.52	15.43	15.21	15.10		0	
16QAM	1	0	15.41	15.41	15.41	15.09	15.10	0-1	0	
	1	36	15.45	15.51	15.36	15.11	15.09		0-2	0
	1	74	15.50	15.49	15.33	15.17	15.07			0
	36	0	15.07	15.15	15.11	14.86	14.79	0		0
	36	18	15.14	15.21	15.10	14.88	14.80			0
	36	37	15.19	15.19	15.07	14.90	14.78		0	
	75	0	15.20	15.22	15.11	14.91	14.80	0		
64QAM	1	0	15.31	15.32	15.33	15.02	15.02	0-2	0	
	1	36	15.33	15.39	15.30	15.08	15.02		0-3	0
	1	74	15.42	15.37	15.27	15.14	15.03			0
	36	0	15.21	15.28	15.26	15.03	14.95	0		
	36	18	15.28	15.35	15.25	15.06	14.96	0		
	36	37	15.33	15.32	15.24	15.07	14.95		0	
	75	0	15.34	15.35	15.26	15.06	14.96		0	

FCC ID: BCGA2014		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 112 of 195

Table 8-157

LTE Band 41 PC3 Reduced Conducted Powers - 10 MHz Bandwidth- Antenna 2B

LTE Band 41 10 MHz Bandwidth										
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]	
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)			
			Conducted Power [dBm]							
QPSK	1	0	15.44	15.51	15.51	15.25	15.13	0	0	
	1	25	15.51	15.53	15.47	15.24	15.12		0-1	0
	1	49	15.54	15.55	15.48	15.30	15.14			0
	25	0	15.43	15.45	15.46	15.24	15.11	0		
	25	12	15.41	15.50	15.45	15.23	15.09	0		0
	25	25	15.49	15.51	15.45	15.23	15.10		0	
	50	0	15.51	15.52	15.48	15.15	15.12		0	
16QAM	1	0	15.37	15.48	15.39	15.12	15.09	0-1	0	
	1	25	15.50	15.48	15.34	15.09	15.08		0-2	0
	1	49	15.52	15.52	15.35	15.15	15.11			0
	25	0	15.13	15.14	15.10	14.87	14.79	0		0
	25	12	15.12	15.20	15.08	14.87	14.79			0
	25	25	15.17	15.21	15.08	14.89	14.78		0	
	50	0	15.19	15.22	15.10	14.89	14.80	0		
64QAM	1	0	15.30	15.38	15.34	15.08	15.01	0-2	0	
	1	25	15.39	15.40	15.32	15.06	15.00		0-3	0
	1	49	15.42	15.41	15.31	15.12	15.01			0
	25	0	15.24	15.27	15.26	15.02	14.92	0		
	25	12	15.23	15.32	15.24	15.03	14.90	0		0
	25	25	15.30	15.33	15.25	15.04	14.92		0	
	50	0	15.32	15.35	15.26	15.05	14.93		0	

Table 8-158

LTE Band 41 PC3 Reduced Conducted Powers - 5 MHz Bandwidth- Antenna 2B

LTE Band 41 5 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	15.50	15.44	15.49	15.31	15.20	0	0
	1	12	15.53	15.49	15.45	15.29	15.17		0
	1	24	15.57	15.51	15.47	15.33	15.24		0
	12	0	15.44	15.48	15.44	15.29	15.16	0-1	0
	12	6	15.43	15.47	15.44	15.27	15.15		0
	12	13	15.50	15.47	15.45	15.27	15.16		0
	25	0	15.51	15.48	15.44	15.29	15.16		0
16QAM	1	0	15.43	15.41	15.37	15.19	15.13	0-1	0
	1	12	15.47	15.44	15.31	15.16	15.12		0
	1	24	15.53	15.46	15.35	15.18	15.11		0
	12	0	15.16	15.19	15.09	14.93	14.84	0-2	0
	12	6	15.17	15.18	15.08	14.92	14.82		0
	12	13	15.21	15.19	15.09	14.93	14.83		0
	25	0	15.20	15.16	15.08	14.93	14.83		0
64QAM	1	0	15.38	15.31	15.30	15.14	15.06	0-2	0
	1	12	15.40	15.34	15.27	15.11	15.03		0
	1	24	15.46	15.38	15.28	15.15	15.04		0
	12	0	15.27	15.32	15.26	15.10	14.99	0-3	0
	12	6	15.26	15.31	15.25	15.08	14.98		0
	12	13	15.33	15.32	15.26	15.09	15.00		0
	25	0	15.32	15.30	15.24	15.08	14.96		0

FCC ID: BCGA2014	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 113 of 195

Table 8-159
LTE Band 41 PC2 Reduced Conducted Powers - 20 MHz Bandwidth- Antenna 2B

LTE Band 41 20 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	15.59	15.44	15.38	15.46	15.32	0	0
	1	50	15.56	15.41	15.38	15.40	15.33		0
	1	99	15.60	15.54	15.42	15.41	15.38		0
	50	0	15.40	15.23	15.39	15.32	15.12	0-1	0
	50	25	15.44	15.24	15.40	15.10	15.14		0
	50	50	15.48	15.30	15.43	15.32	15.15		0
	100	0	15.43	15.24	15.45	15.32	15.14		0
16QAM	1	0	15.55	15.45	15.39	15.15	15.13	0-1	0
	1	50	15.60	15.38	15.35	15.17	15.15		0
	1	99	15.59	15.40	15.31	15.27	15.18		0
	50	0	15.02	14.93	14.91	14.68	14.67	0-2	0
	50	25	15.14	14.91	14.88	14.70	14.66		0
	50	50	15.17	14.90	14.86	14.75	14.68		0
	100	0	15.20	14.95	14.90	14.74	14.69		0
64QAM	1	0	15.48	15.35	15.26	15.15	15.01	0-2	0
	1	50	15.60	15.28	15.23	15.11	15.02		0
	1	99	15.57	15.27	15.34	15.19	15.08		0
	50	0	15.10	15.00	14.97	14.83	14.70	0-3	0
	50	25	15.26	14.97	14.96	14.82	14.71		0
	50	50	15.29	14.95	14.98	14.86	14.73		0
	100	0	15.31	15.01	14.99	14.84	14.72		0

Table 8-160
LTE Band 41 PC2 Reduced Conducted Powers - 15 MHz Bandwidth- Antenna 2B

LTE Band 41 15 MHz Bandwidth										
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]	
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)			
			Conducted Power [dBm]							
QPSK	1	0	15.50	15.48	15.46	15.18	15.11	0	0	
	1	36	15.50	15.53	15.43	15.24	15.12		0-1	0
	1	74	15.59	15.49	15.41	15.29	15.09			0
	36	0	15.41	15.42	15.38	15.13	15.05	0		
	36	18	15.45	15.47	15.37	15.17	15.06	0-1		0
	36	37	15.51	15.45	15.35	15.17	15.04		0	
	75	0	15.54	15.47	15.38	15.19	15.07		0	
16QAM	1	0	15.54	15.43	15.36	15.11	15.10	0-1	0	
	1	36	15.59	15.40	15.32	15.13	15.16		0-2	0
	1	74	15.60	15.35	15.24	15.19	15.13			0
	36	0	15.00	14.90	14.88	14.69	14.64	0-2		0
	36	18	15.07	14.92	14.87	14.71	14.66			0
	36	37	15.14	14.88	14.85	14.74	14.65		0	
	75	0	15.15	14.91	14.88	14.71	14.66	0		
64QAM	1	0	15.37	15.29	15.22	15.10	14.96	0-2	0	
	1	36	15.46	15.23	15.23	15.12	15.02		0-3	0
	1	74	15.59	15.22	15.25	15.15	14.99			0
	36	0	15.06	14.96	14.96	14.83	14.68	0		
	36	18	15.15	14.99	14.98	14.84	14.70	0-3		0
	36	37	15.25	14.95	14.95	14.82	14.71		0	
	75	0	15.24	14.98	14.97	14.83	14.69		0	

FCC ID: BCGA2014	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device		Page 114 of 195

Table 8-161

LTE Band 41 PC2 Reduced Conducted Powers - 10 MHz Bandwidth- Antenna 2B

LTE Band 41 10 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	15.49	15.52	15.47	15.21	15.13	0	0
	1	25	15.55	15.51	15.42	15.22	15.10		0
	1	49	15.59	15.53	15.43	15.27	15.11		0
	25	0	15.43	15.42	15.37	15.15	15.04	0-1	0
	25	12	15.42	15.45	15.35	15.15	15.03		0
	25	25	15.50	15.46	15.36	15.16	15.04		0
	50	0	15.50	15.46	15.38	15.17	15.06		0
16QAM	1	0	15.50	15.42	15.37	15.17	15.11	0-1	0
	1	25	15.60	15.39	15.32	15.15	15.14		0
	1	49	15.60	15.36	15.29	15.19	15.19		0
	25	0	15.05	14.90	14.88	14.71	14.64	0-2	0
	25	12	15.04	14.88	14.85	14.69	14.63		0
	25	25	15.14	14.87	14.84	14.74	14.64		0
	50	0	15.13	14.90	14.87	14.70	14.65		0
64QAM	1	0	15.40	15.31	15.27	15.14	15.02	0-2	0
	1	25	15.55	15.29	15.25	15.11	15.00		0
	1	49	15.59	15.25	15.27	15.17	15.04		0
	25	0	15.11	14.97	14.96	14.83	14.68	0-3	0
	25	12	15.12	14.96	14.95	14.82	14.69		0
	25	25	15.23	14.95	14.97	14.81	14.68		0
	50	0	15.24	14.98	14.98	14.87	14.70		0

Table 8-162

LTE Band 41 PC2 Reduced Conducted Powers - 5 MHz Bandwidth- Antenna 2B

LTE Band 41 5 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	15.52	15.46	15.42	15.28	15.20	0	0
	1	12	15.53	15.49	15.38	15.26	15.17		0
	1	24	15.57	15.51	15.40	15.30	15.18		0
	12	0	15.42	15.42	15.33	15.21	15.08	0-1	0
	12	6	15.41	15.42	15.33	15.20	15.07		0
	12	13	15.47	15.41	15.34	15.20	15.07		0
	25	0	15.46	15.42	15.32	15.28	15.08		0
16QAM	1	0	15.57	15.41	15.35	15.15	15.14	0-1	0
	1	12	15.59	15.38	15.32	15.17	15.12		0
	1	24	15.60	15.37	15.34	15.19	15.16		0
	12	0	15.09	14.95	14.92	14.75	14.70	0-2	0
	12	6	15.07	14.93	14.91	14.74	14.69		0
	12	13	15.16	14.92	14.90	14.76	14.71		0
	25	0	15.12	14.89	14.88	14.73	14.67		0
64QAM	1	0	15.45	15.28	15.25	15.17	15.02	0-2	0
	1	12	15.57	15.27	15.27	15.15	15.04		0
	1	24	15.60	15.28	15.26	15.17	15.03		0
	12	0	15.16	15.04	15.03	14.90	14.78	0-3	0
	12	6	15.18	15.03	15.02	14.89	14.77		0
	12	13	15.26	15.01	15.01	14.91	14.79		0
	25	0	15.22	14.97	14.98	14.85	14.74		0

FCC ID: BCGA2014	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 115 of 195

8.3.13 LTE Uplink Carrier Aggregation Conducted Powers

Table 8-163

LTE Uplink Carrier Aggregation Reduced Conducted Powers – Antenna 4A

	PCC									SCC									Power	
Combination	PCC Band	PCC Bandwidth [MHz]	PCC UL Channel	PCC UL Frequency [MHz]	PCC DL Channel	PCC DL Frequency [MHz]	Modulation	PCC UL# RB	PCC UL Offset	SCC Band	SCC Bandwidth [MHz]	SCC UL Channel	SCC UL Frequency [MHz]	SCC DL Channel	SCC DL Frequency [MHz]	Modulation	SCC UL# RB	SCC UL RB Offset	LTE Tx.Power with UL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA_7C (1)	LTE B7	20	21350	2560.0	3350	2680.0	QPSK	1	0	LTE B7	20	21152	2540.2	3152	2660.2	QPSK	1	99	14.06	14.12
	PCC									SCC									Power	
Combination	PCC Band	PCC Bandwidth [MHz]	PCC (UL/DL) Channel	PCC (UL/DL) Frequency [MHz]	Modulation	PCC UL# RB	PCC UL Offset	SCC Band	SCC Bandwidth [MHz]	SCC (UL/DL) Channel	SCC (UL/DL) Frequency [MHz]	Modulation	SCC UL# RB	SCC UL RB Offset	LTE Tx.Power with UL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)				
CA_41C (1)	LTE B41	20	39750	2506.0	QPSK	1	99	LTE B41	20	39948	2525.8	QPSK	1	0	17.12	17.20				

Table 8-164

LTE Uplink Carrier Aggregation Reduced Conducted Powers – Antenna 4B

	PCC									SCC									Power	
Combination	PCC Band	PCC Bandwidth [MHz]	PCC UL Channel	PCC UL Frequency [MHz]	PCC DL Channel	PCC DL Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	SCC Band	SCC Bandwidth [MHz]	SCC UL Channel	SCC UL Frequency [MHz]	SCC DL Channel	SCC DL Frequency [MHz]	Modulation	SCC UL# RB	SCC UL RB Offset	LTE Tx.Power with UL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA_7C (1)	LTE B7	20	21350	2560.0	3350	2680.0	QPSK	1	0	LTE B7	20	21152	2540.2	3152	2660.2	QPSK	1	99	12.05	12.01
Combination	PCC									SCC									Power	
	PCC Band	PCC Bandwidth [MHz]	PCC (UL/DL) Channel	PCC (UL/DL) Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	SCC Band	SCC Bandwidth [MHz]	SCC (UL/DL) Channel	SCC (UL/DL) Frequency [MHz]	Modulation	SCC UL# RB	SCC UL RB Offset	LTE Tx.Power with UL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)				
CA_41C(1)	LTE B41	20	40185	2549.5	QPSK	1	0	LTE B41	20	39987	2529.7	QPSK	1	99	15.54	15.84				

Table 8-165

LTE Uplink Carrier Aggregation Reduced Conducted Powers – Antenna 2A

	PCC									SCC									Power	
Combination	PCC Band	PCC Bandwidth [MHz]	PCC UL Channel	PCC UL Frequency [MHz]	PCC DL Channel	PCC DL Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	SCC Band	SCC Bandwidth [MHz]	SCC UL Channel	SCC UL Frequency [MHz]	SCC DL Channel	SCC DL Frequency [MHz]	Modulation	SCC UL# RB	SCC UL RB Offset	LTE Tx.Power with UL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA_7C (1)	LTE B7	20	21350	2560.0	3350	2680.0	QPSK	50	0	LTE B7	20	21152	2540.2	3152	2660.2	QPSK	50		14.02	14.10
	PCC									SCC									Power	
Combination	PCC Band	PCC Bandwidth [MHz]	PCC (UL/DL) Channel	PCC (UL/DL) Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	SCC Band	SCC Bandwidth [MHz]	SCC (UL/DL) Channel	SCC (UL/DL) Frequency [MHz]	Modulation	SCC UL# RB	SCC UL RB Offset	LTE Tx.Power with UL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)				
CA_41C (1)	LTE B41	20	40185	2549.5	QPSK	1	0	LTE B41	20	39987	2529.7	QPSK	1	99	17.12	17.32				

Table 8-166

LTE Uplink Carrier Aggregation Reduced Conducted Powers – Antenna 2B

	PCC									SCC									Power		
Combination	PCC Band	PCC Bandwidth [MHz]	PCC UL Channel	PCC UL Frequency [MHz]	PCC DL Channel	PCC DL Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	SCC Band	SCC Bandwidth [MHz]	SCC UL Channel	SCC UL Frequency [MHz]	SCC DL Channel	SCC DL Frequency [MHz]	Modulation	SCC UL# RB	SCC UL RB Offset	LTE Tx.Power with UL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)	
CA_7C (1)	LTE B7	20	21100	2535.0	3100	2655.0	QPSK	50	0	LTE B7	20	20902	2515.2	2902	2635.2	QPSK	50		12.88	12.86	
	PCC									SCC									Power		
Combination	PCC Band	PCC Bandwidth [MHz]	PCC (UL/DL) Channel	PCC (UL/DL) Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	SCC Band	SCC Bandwidth [MHz]	SCC (UL/DL) Channel	SCC (UL/DL) Frequency [MHz]	Modulation	SCC UL# RB	SCC UL RB Offset	LTE Tx.Power with UL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)					
CA_41C(1)	LTE B41	20	39750	2506.0	QPSK	1	99	LTE B41	20	39948	2525.8	QPSK	1	0	15.39	15.58					

FCC ID: BCGA2014		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 116 of 195

Notes:

1. This device supports uplink carrier aggregation for LTE CA_7C(1) and LTE CA_41C(1) with a maximum of two 20 MHz component carriers. For intraband contiguous carrier aggregation scenarios, 3GPP 36.101 Table 6.2.2A-1 specifies that the aggregate maximum allowed output power is equivalent to the single carrier scenario. 3GPP 36.101 6.2.3A allows for several dB of MPR to be applied when non-contiguous RB allocation is implemented. The conducted powers and MPR settings in this device are permanently implemented per the above 3GPP requirements.
2. Per FCC Guidance, the output power with uplink CA active was measured for the configuration with the highest reported SAR with single carrier for each exposure condition. The power was measured with wideband signal integration over both component carriers.
3. Uplink carrier aggregation is only possible when the device is operating with Power Class 3 for LTE Band 41.




Figure 8-3
Power Measurement Setup

FCC ID: BCGA2014	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 117 of 195

8.4 WLAN Maximum Conducted Powers

8.4.1 Variant 1

Table 8-167
2.4 GHz WLAN Average RF Power – Ant 4A

2.4GHz Conducted Power [dBm]				
Freq [MHz]	Channel	IEEE Transmission Mode		
		802.11b	802.11g	802.11n
		Average	Average	Average
2412	1	13.60	13.75	13.65
2437	6	13.70	13.65	13.73
2462	11	13.65	12.94	13.00

Table 8-168
2.4 GHz WLAN Average RF Power – Ant 2A

2.4GHz Conducted Power [dBm]				
Freq [MHz]	Channel	IEEE Transmission Mode		
		802.11b	802.11g	802.11n
		Average	Average	Average
2412	1	14.23	13.50	13.55
2417	2	N/A	14.25	14.20
2437	6	14.24	14.25	14.25
2457	10	N/A	14.23	14.25
2462	11	14.25	13.96	13.96

Table 8-169
2.4 GHz WLAN Average RF Power – Ant 5

2.4GHz Conducted Power [dBm]				
Freq [MHz]	Channel	IEEE Transmission Mode		
		802.11b	802.11g	802.11n
		Average	Average	Average
2412	1	18.97	19.00	19.00
2437	6	19.00	19.00	19.00
2457	10	N/A	18.96	19.00
2462	11	18.99	18.50	18.50

FCC ID: BCGA2014	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 118 of 195

Table 8-170
5 GHz WLAN Average RF Power – Ant 5

5GHz (40MHz) Conducted Power [dBm]			5GHz (80MHz) Conducted Power [dBm]		
Freq [MHz]	Channel	IEEE Transmission Mode	Freq [MHz]	Channel	IEEE Transmission Mode
		802.11n			802.11ac
		Average			Average
5190	38	13.99	5530	106	12.98
5230	46	15.47	5610	122	15.95
5270	54	16.74	5690	138	16.00
5310	62	14.47	5775	155	16.00

Table 8-171
5 GHz WLAN Average RF Power – Ant 6

5GHz (40MHz) Conducted Power [dBm]			5GHz (80MHz) Conducted Power [dBm]		
Freq [MHz]	Channel	IEEE Transmission Mode	Freq [MHz]	Channel	IEEE Transmission Mode
		802.11n			802.11ac
		Average			Average
5190	38	13.99	5530	106	12.98
5230	46	17.50	5610	122	16.24
5270	54	16.48	5690	138	16.25
5310	62	14.49	5775	155	15.50

FCC ID: BCGA2014	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device		Page 119 of 195

8.4.2 Variant 2

Table 8-172
2.4 GHz WLAN Average RF Power – Ant 4A

2.4GHz Conducted Power [dBm]				
Freq [MHz]	Channel	IEEE Transmission Mode		
		802.11b	802.11g	802.11n
		Average	Average	Average
2412	1	13.70	13.75	13.75
2437	6	13.74	13.75	13.75
2462	11	13.75	12.90	13.00

Table 8-173
2.4 GHz WLAN Average RF Power – Ant 2A

2.4GHz Conducted Power [dBm]				
Freq [MHz]	Channel	IEEE Transmission Mode		
		802.11b	802.11g	802.11n
		Average	Average	Average
2412	1	14.25	13.30	13.40
2417	2	N/A	14.24	14.08
2437	6	14.22	14.25	14.10
2457	10	N/A	14.23	14.10
2462	11	14.24	14.00	13.90

Table 8-174
2.4 GHz WLAN Average RF Power – Ant 5

2.4GHz Conducted Power [dBm]				
Freq [MHz]	Channel	IEEE Transmission Mode		
		802.11b	802.11g	802.11n
		Average	Average	Average
2412	1	19.00	19.00	19.00
2437	6	18.98	18.90	19.00
2457	10	N/A	18.99	19.00
2462	11	18.99	18.50	18.50

FCC ID: BCGA2014	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 120 of 195

Table 8-175
5 GHz WLAN Average RF Power – Ant 5

5GHz (40MHz) Conducted Power [dBm]			5GHz (80MHz) Conducted Power [dBm]		
Freq [MHz]	Channel	IEEE Transmission Mode	Freq [MHz]	Channel	IEEE Transmission Mode
		802.11n			802.11ac
		Average			Average
5190	38	14.00	5530	106	12.98
5230	46	15.50	5610	122	16.00
5270	54	16.74	5690	138	15.96
5310	62	14.50	5775	155	15.98

Table 8-176
5 GHz WLAN Average RF Power – Ant 6

5GHz (40MHz) Conducted Power [dBm]			5GHz (80MHz) Conducted Power [dBm]		
Freq [MHz]	Channel	IEEE Transmission Mode	Freq [MHz]	Channel	IEEE Transmission Mode
		802.11n			802.11ac
		Average			Average
5190	38	13.90	5530	106	13.00
5230	46	17.46	5610	122	16.24
5270	54	16.49	5690	138	16.25
5310	62	14.50	5775	155	15.43

8.5 WLAN Reduced Conducted Powers

8.5.1 Variant 1

Table 8-177
2.4 GHz WLAN Average RF Power – Ant 4A

2.4GHz Conducted Power [dBm]				
Freq [MHz]	Channel	IEEE Transmission Mode		
		802.11b	802.11g	802.11n
		Average	Average	Average
2412	1	6.74	6.70	6.75
2437	6	6.73	6.75	6.75
2462	11	6.63	6.00	6.00

FCC ID: BCGA2014	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device		Page 121 of 195

Table 8-178
2.4 GHz WLAN Average RF Power – Ant 2A

2.4GHz Conducted Power [dBm]				
Freq [MHz]	Channel	IEEE Transmission Mode		
		802.11b	802.11g	802.11n
		Average	Average	Average
2412	1	7.25	6.40	6.40
2437	6	7.16	7.25	7.25
2462	11	7.22	7.00	7.00

Table 8-179
5 GHz WLAN Average RF Power – Ant 5

5GHz (80MHz) Conducted Power [dBm]		
Freq [MHz]	Channel	IEEE Transmission Mode
		802.11ac
		Average
5210	42	8.44
5290	58	9.70
5530	106	9.00
5610	122	8.99
5690	138	8.99
5775	155	9.00

Table 8-180
5 GHz WLAN Average RF Power – Ant 6

5GHz (80MHz) Conducted Power [dBm]		
Freq [MHz]	Channel	IEEE Transmission Mode
		802.11ac
		Average
5210	42	12.50
5290	58	11.40
5530	106	11.25
5610	122	11.15
5690	138	11.19
5775	155	10.44

FCC ID: BCGA2014	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 122 of 195

8.5.2

Variant 2

Table 8-181
2.4 GHz WLAN Average RF Power – Ant 4A

2.4GHz Conducted Power [dBm]				
Freq [MHz]	Channel	IEEE Transmission Mode		
		802.11b	802.11g	802.11n
		Average	Average	Average
2412	1	6.75	6.75	6.70
2437	6	6.73	6.75	6.75
2462	11	6.74	6.00	6.00

Table 8-182
2.4 GHz WLAN Average RF Power – Ant 2A

2.4GHz Conducted Power [dBm]				
Freq [MHz]	Channel	IEEE Transmission Mode		
		802.11b	802.11g	802.11n
		Average	Average	Average
2412	1	7.23	6.50	6.40
2437	6	7.21	7.15	7.25
2462	11	7.19	6.85	6.90

Table 8-183
5 GHz WLAN Average RF Power – Ant 5

5GHz (80MHz) Conducted Power [dBm]		
Freq [MHz]	Channel	IEEE Transmission Mode
		802.11ac
		Average
5210	42	8.50
5290	58	9.75
5530	106	9.00
5610	122	8.99
5690	138	8.95
5775	155	8.92

FCC ID: BCGA2014	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 123 of 195

Table 8-184
5 GHz WLAN Average RF Power – Ant 6

5GHz (80MHz) Conducted Power [dBm]		
Freq [MHz]	Channel	IEEE Transmission Mode
		802.11ac
		Average
5210	42	12.47
5290	58	11.45
5530	106	11.25
5610	122	11.18
5690	138	11.18
5775	155	10.36

8.5.3 WLAN Power Reduction Summary

Table 8-185
WLAN Power Reduction Verification

Antenna	Mode/Band	Condition (s)	Maximum Target Power [dBm]	Reduced Target Power [dBm]	Maximum Measured Power	Reduced Measured Power	Verdict
			(Tolerance [dB])	Tolerance [dB]	[dBm]	[dBm]	
ANT2A	2.4 GHz WLAN	Main Band 2a/2b ON	12.75 (±1.5)	5.75 (±1.5)	11.64	5.96	PASS
ANT4A	2.4 GHz WLAN	Main Band 4a/4b ON	12.25 (±1.5)	5.25 (±1.5)	11.91	5.26	PASS
ANT5	5 GHz WLAN	Main Band 2a ON	15.25 (±1.5)	8.25 (±1.5)	13.81	7.88	PASS
ANT6	5 GHz WLAN	Main Band 3 ON	16.0 (±1.5)	11.0 (±1.5)	14.65	10.03	PASS

Conducted powers were measured for each Mode/Band and applied condition. All conducted power measurements were verified to be within tolerance.

FCC ID: BCGA2014	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device		Page 124 of 195

8.5.4 Notes for WLAN

Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02:

- Power measurements were performed for the transmission mode configuration with the highest maximum output power specified for production units.
- For transmission modes with the same maximum output power specification, powers were measured for the largest channel bandwidth, lowest order modulation and lowest data rate.
- For transmission modes with identical maximum specified output power, channel bandwidth, modulation and data rates, power measurements were required for all identical configurations.
- For each transmission mode configuration, powers were measured for the highest and lowest channels; and at the mid-band channel(s) when there were at least 3 channels supported. For configurations with multiple mid-band channels, due to an even number of channels, both channels were measured.
- The WLAN chipset in this device is produced by two different suppliers. The electrically identical modules are manufactured with the identical mechanical structure to meet the same specifications and functions. Two device variants are referenced as Variant 1 and Variant 2 in this report.
- WLAN SAR worst case configuration was spotchecked on Variant 1 and Variant 2. The Variant with the highest reported SAR value was evaluated for the remaining WLAN configurations.
- The bolded data rate and channel above were tested for SAR.

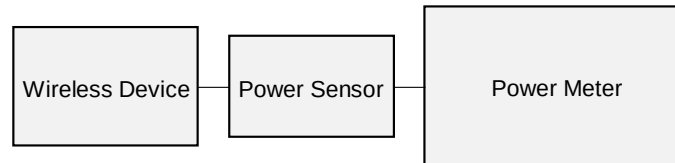


Figure 8-4
Power Measurement Setup

FCC ID: BCGA2014	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 125 of 195

8.6 Bluetooth Conducted Powers

Table 8-186
Maximum Bluetooth Average RF Power – Ant 4A - Variant 1

Frequency [MHz]	Modulation	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2402	GFSK	1.0	0	14.45	27.861
2441	GFSK	1.0	39	14.52	28.314
2480	GFSK	1.0	78	13.87	24.378

Table 8-187
Maximum Bluetooth Average RF Power – Ant 2A - Variant 1

Frequency [MHz]	Modulation	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2402	GFSK	1.0	0	14.75	29.854
2441	GFSK	1.0	39	14.58	28.708
2480	GFSK	1.0	78	14.39	27.479

Table 8-188
Maximum Bluetooth Average RF Power – Ant 5 - Variant 1

Frequency [MHz]	Modulation	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2402	GFSK	1.0	0	15.84	38.371
2441	GFSK	1.0	39	15.59	36.224
2480	GFSK	1.0	78	15.45	35.075

Table 8-189
Maximum Bluetooth Average RF Power – Ant 4A - Variant 2

Frequency [MHz]	Modulation	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2402	GFSK	1.0	0	14.17	26.122
2441	GFSK	1.0	39	14.36	27.290
2480	GFSK	1.0	78	13.08	20.324

FCC ID: BCGA2014	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 126 of 195

Table 8-190
Maximum Bluetooth Average RF Power – Ant 2A - Variant 2

Frequency [MHz]	Modulation	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2402	GFSK	1.0	0	14.64	29.107
2441	GFSK	1.0	39	14.46	27.925
2480	GFSK	1.0	78	14.25	26.607

Table 8-191
Maximum Bluetooth Average RF Power – Ant 5 - Variant 2

Frequency [MHz]	Modulation	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2402	GFSK	1.0	0	16.00	39.811
2441	GFSK	1.0	39	15.89	38.815
2480	GFSK	1.0	78	15.96	39.446

Table 8-192
Reduced Bluetooth Average RF Power – Ant 4A - Variant 1

Frequency [MHz]	Modulation	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2402	GFSK	1.0	0	7.75	5.957
2441	GFSK	1.0	39	7.67	5.848
2480	GFSK	1.0	78	6.48	4.446

Table 8-193
Reduced Power Level 1 Bluetooth Average RF Power – Ant 2A - Variant 1

Frequency [MHz]	Modulation	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2402	GFSK	1.0	0	12.13	16.331
2441	GFSK	1.0	39	12.12	16.293
2480	GFSK	1.0	78	11.84	15.276

FCC ID: BCGA2014	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device		Page 127 of 195

Table 8-194
Reduced Power Level 2 Bluetooth Average RF Power – Ant 2A - Variant 1

Frequency [MHz]	Modulation	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2402	GFSK	1.0	0	7.75	5.957
2441	GFSK	1.0	39	7.67	5.848
2480	GFSK	1.0	78	7.38	5.470

Table 8-195
Reduced Power Bluetooth Average RF Power – Ant 5 - Variant 1

Frequency [MHz]	Modulation	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2402	GFSK	1.0	0	15.03	31.842
2441	GFSK	1.0	39	15.19	33.037
2480	GFSK	1.0	78	15.36	34.356

Table 8-196
Reduced Bluetooth Average RF Power – Ant 4A - Variant 2

Frequency [MHz]	Modulation	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2402	GFSK	1.0	0	7.48	5.598
2441	GFSK	1.0	39	7.35	5.433
2480	GFSK	1.0	78	5.75	3.758

Table 8-197
Reduced Power Level 1 Bluetooth Average RF Power – Ant 2A - Variant 2

Frequency [MHz]	Modulation	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2402	GFSK	1.0	0	12.50	17.783
2441	GFSK	1.0	39	12.44	17.539
2480	GFSK	1.0	78	12.39	17.338

FCC ID: BCGA2014		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device		Page 128 of 195

Table 8-198
Reduced Power Level 2 Bluetooth Average RF Power – Ant 2A - Variant 2

Frequency [MHz]	Modulation	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2402	GFSK	1.0	0	7.75	5.957
2441	GFSK	1.0	39	7.74	5.943
2480	GFSK	1.0	78	7.73	5.929

Table 8-199
Reduced Power Bluetooth Average RF Power – Ant 5 - Variant 2

Frequency [MHz]	Modulation	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2402	GFSK	1.0	0	15.42	34.834
2441	GFSK	1.0	39	15.22	33.266
2480	GFSK	1.0	78	15.44	34.995

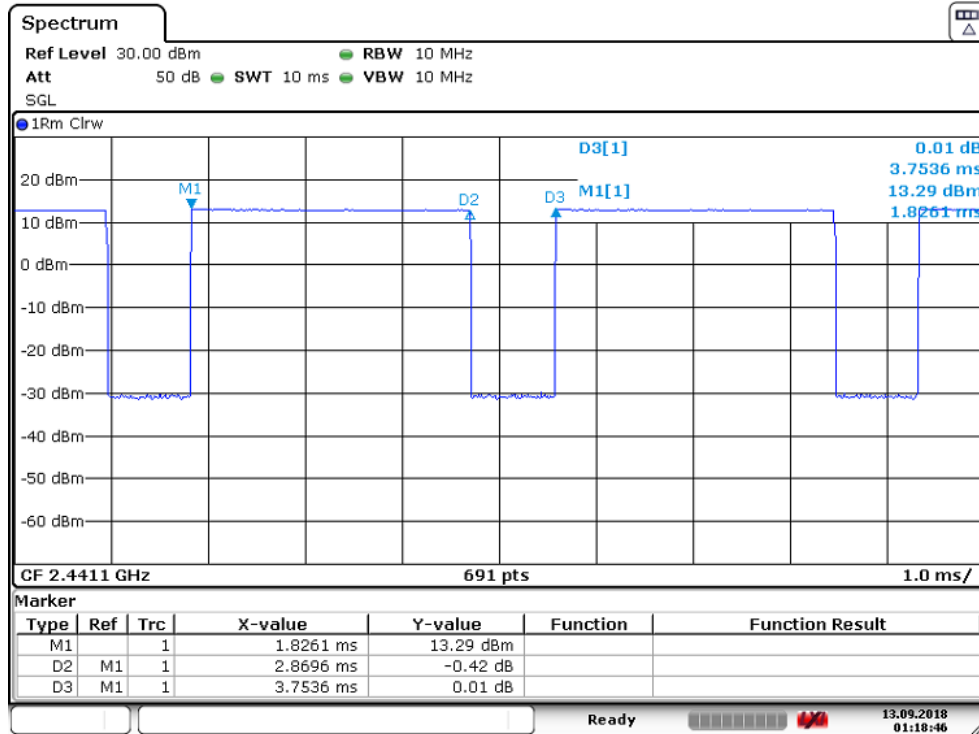


Figure 8-5
Bluetooth Transmission Plot & Duty Cycle Calculation – Ant 4A Variant 1

$$\text{Duty Cycle} = \frac{\text{Pulse Width}}{\text{Period}} * 100\% = \frac{2.8696\text{ms}}{3.7536\text{ms}} * 100\% = 76.5\%$$

FCC ID: BCGA2014	PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 129 of 195

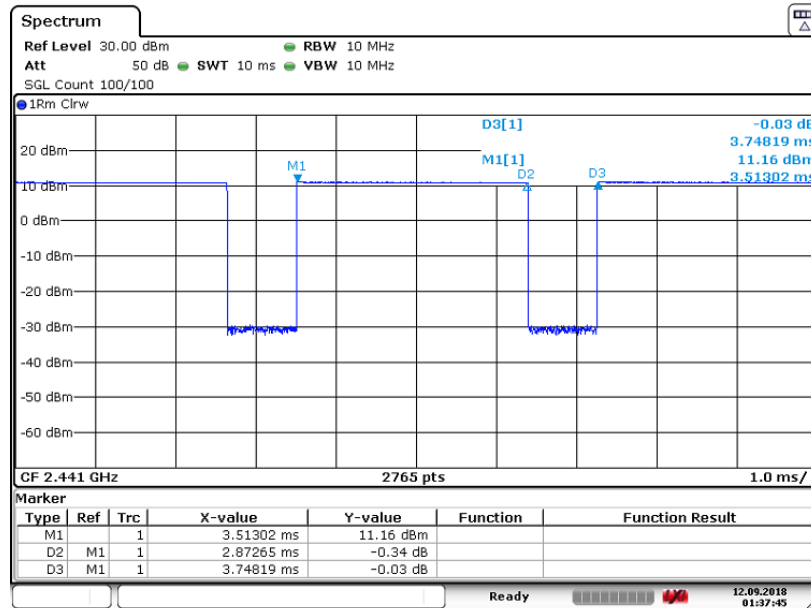


Figure 8-6
Bluetooth Transmission Plot & Duty Cycle Calculation – Ant 4A Variant 2

$$\text{Duty Cycle} = \frac{\text{Pulse Width}}{\text{Period}} * 100\% = \frac{2.8727\text{ms}}{3.7482\text{ms}} * 100\% = 76.7\%$$

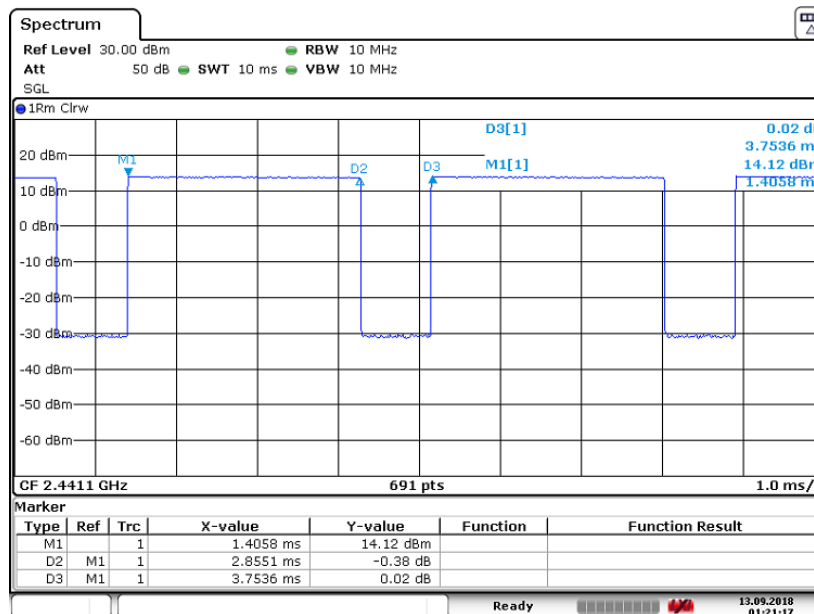


Figure 8-7
Bluetooth Transmission Plot & Duty Cycle Calculation – Ant 2A Variant 1

$$\text{Duty Cycle} = \frac{\text{Pulse Width}}{\text{Period}} * 100\% = \frac{2.8551\text{ms}}{3.7536\text{ms}} * 100\% = 76.1\%$$

FCC ID: BCGA2014	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 130 of 195

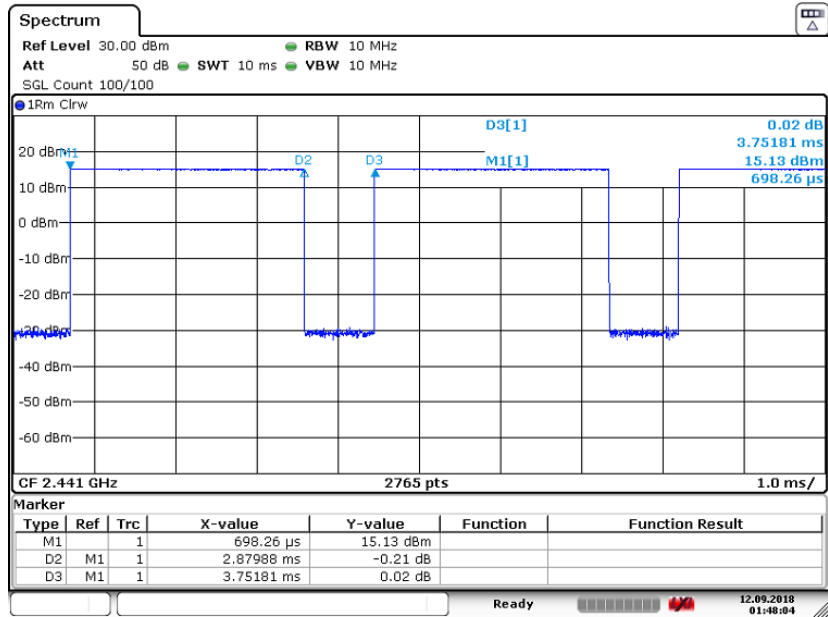


Figure 8-8
 Bluetooth Transmission Plot & Duty Cycle Calculation – Ant 2A Variant 2

$$\text{Duty Cycle} = \frac{\text{Pulse Width}}{\text{Period}} * 100\% = \frac{2.8799\text{ms}}{3.7518\text{ms}} * 100\% = 76.8\%$$

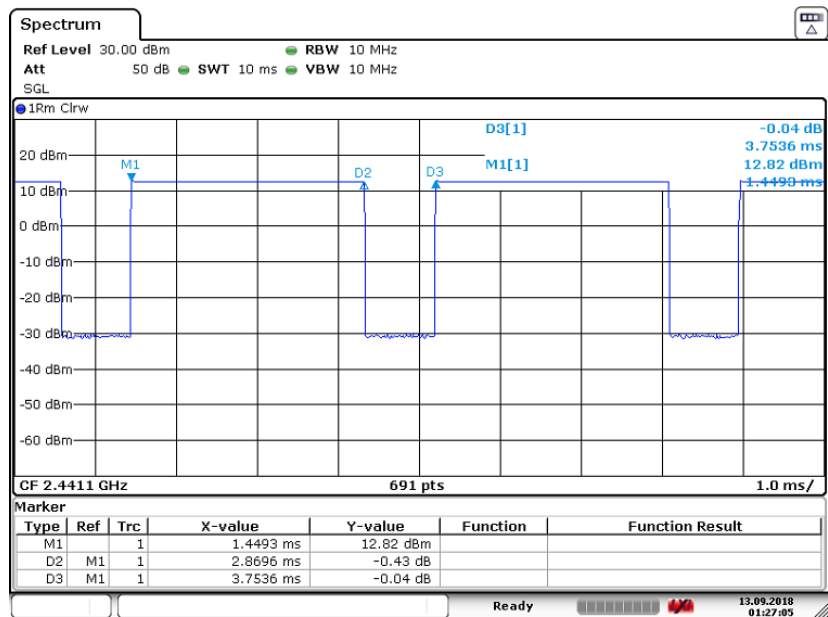


Figure 8-9
 Bluetooth Transmission Plot & Duty Cycle Calculation – Ant 5 Variant 1

$$\text{Duty Cycle} = \frac{\text{Pulse Width}}{\text{Period}} * 100\% = \frac{2.8696\text{ms}}{3.7536\text{ms}} * 100\% = 76.5\%$$

FCC ID: BCGA2014	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 131 of 195

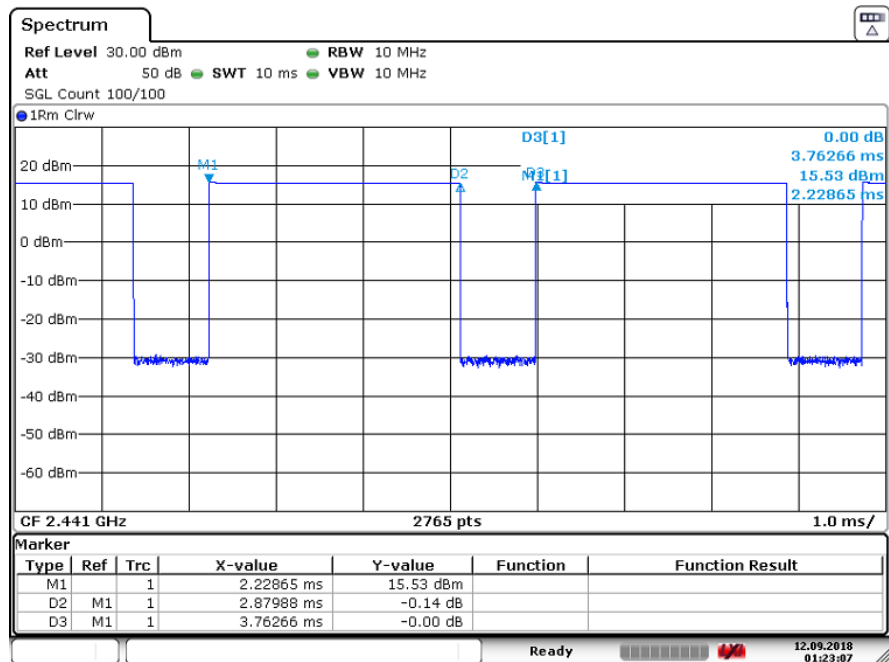


Figure 8-10
Bluetooth Transmission Plot & Duty Cycle Calculation – Ant 5 Variant 2

$$\text{Duty Cycle} = \frac{\text{Pulse Width}}{\text{Period}} * 100\% = \frac{2.8799\text{ms}}{3.7627\text{ms}} * 100\% = 76.5\%$$

8.6.1 Bluetooth Power Reduction Verification Summary

Antenna	Mode/Band	Condition (s)	Maximum Target Power [dBm]	Reduced Target Power [dBm]	Maximum Measured Power [dBm]	Reduced Measured Power [dBm]	Verdict
			(Tolerance [dB])	Tolerance [dB]			
ANT4A	2.4 GHz Bluetooth	Main Band ANT3/4a/4b ON	13.25 (+1.5/-2.0)	6.25 (+1.5/-2.0)	12.63	5.85	PASS
ANT2A	2.4 GHz Bluetooth	5 GHz WLAN ON	13.25 (+1.5/-2.0)	11.0 (+1.5/-2.0)	13.31	10.36	PASS
	2.4 GHz Bluetooth	Main Band ANT1/2a/2b ON	13.25 (+1.5/-2.0)	6.25 (+1.5/-2.0)	13.35	6.34	PASS
	2.4 GHz Bluetooth	5 GHz WLAN ON, Main Band ANT1/2a/2b ON	13.25 (+1.5/-2.0)	6.25 (+1.5/-2.0)	13.33	6.23	PASS
ANT5	2.4 GHz Bluetooth	5 GHz WLAN ON, Main Band ANT1/2a/2b ON	16.0 (+1.5/-2.0)	14.0 (+1.5/-2.0)	15.07	13.08	PASS

Conducted powers were measured for each Mode/Band and applied condition. All conducted power measurements were verified to be within tolerance.

FCC ID: BCGA2014	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 132 of 195

8.6.2 Notes for Bluetooth

- The Bluetooth chipset in this device is produced by two different suppliers. The electrically identical modules are manufactured with the identical mechanical structure to meet the same specifications and functions. Two device variants are referenced as Variant 1 and Variant 2 in this report.
- Bluetooth SAR worst case configuration was spotchecked on Variant 1 and Variant 2. The Variant with the highest reported SAR value was evaluated for the remaining Bluetooth configurations.

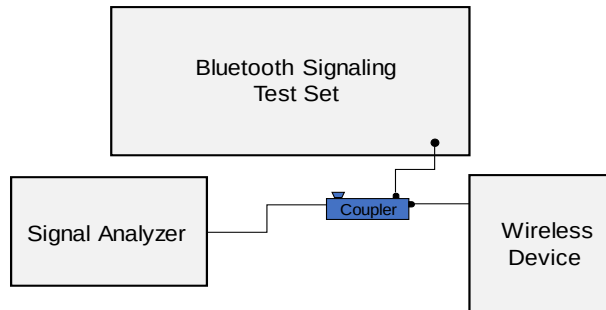


Figure 8-11
Power Measurement Setup

FCC ID: BCGA2014	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 133 of 195

9 SYSTEM VERIFICATION

9.1 Tissue Verification

Table 9-1
Measured Tissue Properties

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ	TARGET Conductivity, σ (S/m)	TARGET Dielectric Constant, ϵ	% dev σ	% dev ϵ
9/12/2018	750B	21.1	680	0.945	55.031	0.958	55.804	-1.36%	-1.39%
			695	0.951	55.001	0.959	55.745	-0.83%	-1.33%
			700	0.953	54.997	0.959	55.726	-0.63%	-1.31%
			740	0.966	54.943	0.963	55.570	0.31%	-1.13%
			755	0.971	54.905	0.964	55.512	0.73%	-1.09%
9/20/2018	750B	22.8	700	0.916	56.321	0.959	55.726	-4.48%	1.07%
			710	0.925	56.225	0.960	55.687	-3.65%	0.97%
			740	0.953	55.919	0.963	55.570	-1.04%	0.63%
			755	0.967	55.778	0.964	55.512	0.31%	0.49%
			770	0.983	55.653	0.965	55.453	1.87%	0.36%
			785	0.998	55.520	0.966	55.395	3.31%	0.23%
			800	1.013	55.372	0.967	55.336	4.76%	0.07%
			800	0.969	53.826	0.967	55.336	0.21%	-2.73%
9/8/2018	835B	20.9	820	0.987	53.629	0.969	55.258	1.86%	-2.95%
			835	1.002	53.473	0.970	55.200	3.30%	-3.13%
			850	1.017	53.321	0.988	55.154	2.94%	-3.32%
			820	0.984	54.662	0.969	55.258	1.55%	-1.08%
9/19/2018	835B	21.4	835	1.000	54.540	0.970	55.200	3.09%	-1.20%
			850	1.016	54.414	0.988	55.154	2.83%	-1.34%
			820	0.980	53.906	0.969	55.258	1.14%	-2.45%
9/21/2018	835B	21.5	835	0.995	53.733	0.970	55.200	2.58%	-2.66%
			850	1.009	53.559	0.988	55.154	2.13%	-2.89%
			1710	1.492	51.569	1.463	53.537	1.98%	-3.68%
9/10/2018	1750B	22.9	1750	1.531	51.452	1.488	53.432	2.89%	-3.71%
			1790	1.568	51.330	1.514	53.326	3.57%	-3.74%
			1710	1.508	51.549	1.463	53.537	3.08%	-3.71%
9/17/2018	1750B	20.9	1750	1.546	51.375	1.488	53.432	3.90%	-3.85%
			1790	1.583	51.249	1.514	53.326	4.56%	-3.89%
			1850	1.544	51.580	1.520	53.300	1.58%	-3.23%
9/10/2018	1900B	23.8	1880	1.571	51.544	1.520	53.300	3.36%	-3.29%
			1910	1.595	51.454	1.520	53.300	4.93%	-3.46%
			1850	1.456	51.932	1.520	53.300	-4.21%	-2.57%
9/18/2018	1900B	19.7	1880	1.486	51.856	1.520	53.300	-2.24%	-2.71%
			1910	1.516	51.773	1.520	53.300	-0.26%	-2.86%
			2300	1.860	51.657	1.809	52.900	2.82%	-2.35%
9/12/2018	2300B	23.0	2310	1.873	51.636	1.816	52.887	3.14%	-2.37%
			2320	1.885	51.614	1.826	52.873	3.23%	-2.38%
			2400	1.930	51.657	1.902	52.767	1.47%	-2.10%
9/6/2018	2400B	22.4	2450	1.990	51.471	1.950	52.700	2.05%	-2.33%
			2500	2.066	51.263	2.021	52.636	2.23%	-2.61%
			2400	1.902	51.644	1.902	52.767	0.00%	-2.13%
9/10/2018	2400-2600B	23.0	2450	1.969	51.476	1.950	52.700	0.97%	-2.32%
			2500	2.036	51.260	2.021	52.636	0.74%	-2.61%
			2550	2.107	51.095	2.092	52.573	0.72%	-2.81%
			2600	2.174	50.929	2.163	52.509	0.51%	-3.01%
			2650	2.244	50.725	2.234	52.445	0.45%	-3.28%
			2700	2.315	50.542	2.305	52.382	0.43%	-3.51%
			2400	1.972	51.589	1.902	52.767	3.68%	-2.21%
			2450	2.034	51.508	1.950	52.700	4.31%	-2.26%
9/10/2018	2400-2600B	22.1	2500	2.093	51.344	2.021	52.636	3.56%	-2.45%
			2550	2.149	51.179	2.092	52.573	2.72%	-2.65%
			2600	2.213	51.020	2.163	52.509	2.31%	-2.84%
			2650	2.273	50.919	2.234	52.445	1.75%	-2.91%
			2700	2.336	50.710	2.305	52.382	1.34%	-3.19%
			2400	1.990	51.642	1.902	52.767	4.63%	-2.13%
			2450	2.046	51.496	1.950	52.700	4.92%	-2.28%
			2500	2.105	51.352	2.021	52.636	4.16%	-2.44%
09/18/2018	5200B-5800B	21.5	5180	5.344	47.550	5.276	49.041	1.29%	-3.04%
			5200	5.379	47.588	5.299	49.014	1.51%	-2.91%
			5220	5.395	47.546	5.323	48.987	1.35%	-2.94%
			5240	5.424	47.473	5.346	48.960	1.46%	-3.04%
			5260	5.473	47.427	5.369	48.933	1.94%	-3.08%
			5280	5.472	47.368	5.393	48.906	1.46%	-3.14%
			5300	5.495	47.382	5.416	48.879	1.46%	-3.06%
			5320	5.526	47.374	5.439	48.851	1.60%	-3.02%
			5500	5.763	47.029	5.650	48.607	2.00%	-3.25%
			5520	5.785	46.977	5.673	48.580	1.97%	-3.30%
			5540	5.846	46.941	5.696	48.553	2.63%	-3.32%
			5600	5.895	46.882	5.766	48.471	2.24%	-3.28%
			5620	5.942	46.848	5.790	48.444	2.63%	-3.29%
			5680	6.006	46.653	5.860	48.363	2.49%	-3.54%
			5700	6.054	46.629	5.883	48.336	2.91%	-3.53%
			5745	6.123	46.627	5.936	48.275	3.15%	-3.41%
			5765	6.144	46.621	5.959	48.248	3.10%	-3.37%
			5785	6.168	46.590	5.982	48.220	3.11%	-3.38%

The above measured tissue parameters were used in the DASY software. The DASY software was used to perform interpolation to determine the dielectric parameters at the SAR test device frequencies (per KDB Publication 865664 D01v01r04 and IEEE 1528-2013 6.6.1.2). The tissue parameters listed in the SAR test plots may slightly differ from the table above due to significant digit rounding in the software.

FCC ID: BCGA2014	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 134 of 195

9.2 Test System Verification

Prior to SAR assessment, the system is verified to $\pm 10\%$ of the SAR measurement on the reference dipole at the time of calibration by the calibration facility. Full system validation status and result summary can be found in Appendix E.

Table 9-2
System Verification Results

System Verification												
TARGET & MEASURED												
SAR System #	Tissue Frequency (MHz)	Tissue Type	Date:	Amb. Temp (°C)	Liquid Temp (°C)	Input Power (W)	Source SN	Probe SN	Measured SAR _{1g} (W/kg)	1 W Target SAR _{1g} (W/kg)	1 W Normalized SAR _{1g} (W/kg)	Deviation _{1g} (%)
AM3	750	BODY	09/12/2018	23.2	21.2	0.200	1034	7416	1.850	8.570	9.250	7.93%
AM4	750	BODY	09/20/2018	21.2	22.8	0.200	1057	7416	1.770	8.790	8.850	0.68%
AM5	835	BODY	09/08/2018	22.9	20.9	0.200	4d180	7490	1.980	9.590	9.900	3.23%
AM5	850	BODY	09/19/2018	23.3	21.2	0.200	1010	7490	1.980	10.200	9.900	-2.94%
AM5	850	BODY	09/21/2018	23.3	21.2	0.200	1010	7490	1.940	10.200	9.700	-4.90%
AM8	1750	BODY	09/10/2018	22.0	22.1	0.100	1083	3287	3.980	37.300	39.800	6.70%
AM8	1750	BODY	09/17/2018	23.3	21.0	0.100	1083	3287	3.810	37.300	38.100	2.14%
AM8	1900	BODY	09/10/2018	23.3	22.2	0.100	5d181	3287	4.080	39.500	40.800	3.29%
AM1	1900	BODY	09/18/2018	21.8	21.7	0.100	5d180	3275	3.730	39.500	37.300	-5.57%
AM2	2300	BODY	09/12/2018	23.1	22.1	0.100	1038	3022	4.690	46.700	46.900	0.43%
AM1	2450	BODY	09/06/2018	21.0	21.3	0.100	945	3275	5.240	49.400	52.400	6.07%
AM7	2450	BODY	09/10/2018	22.6	22.0	0.100	750	3329	5.460	51.200	54.600	6.64%
AM2	2450	BODY	09/10/2018	22.3	22.1	0.100	750	3022	5.180	51.200	51.800	1.17%
AM2	2450	BODY	09/21/2018	23.1	21.3	0.100	921	3022	5.200	50.700	52.000	2.56%
AM2	2600	BODY	09/10/2018	22.3	22.1	0.100	1009	3022	5.810	55.500	58.100	4.68%
AM7	2600	BODY	09/10/2018	22.6	22.0	0.100	1009	3329	5.890	55.500	58.900	6.13%
AM6	5250	BODY	09/18/2018	24.4	21.5	0.050	1123	3837	3.670	74.000	73.400	-0.81%
AM6	5600	BODY	09/18/2018	24.4	21.5	0.050	1123	3837	3.660	77.600	73.200	-5.67%
AM6	5750	BODY	09/18/2018	24.4	21.5	0.050	1123	3837	3.550	74.700	71.000	-4.95%

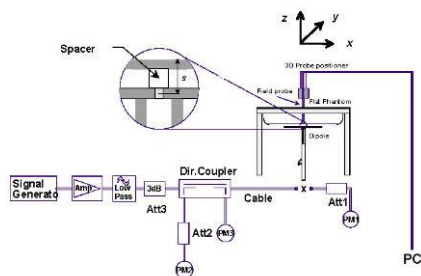


Figure 9-1
System Verification Setup Diagram



Figure 9-2
System Verification Setup Photo

FCC ID: BCGA2014	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 135 of 195

10 SAR DATA SUMMARY

10.1 Standalone Body SAR Data

Table 10-1
GSM 850 Body SAR – Ant 1

MEASUREMENT RESULTS																		
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	# of GPRS Slots	Duty Cycle	Side	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #
MHz	Ch.												(W/kg)		(W/kg)	(W/kg)	(W/kg)	
836.60	190	GSM 850	GPRS	26.5	25.63	0.01	0 mm	Ant 1	DLXX702DKYD1	2	1:4.15	back	0.392	1.222	0.479	0.213	0.260	
836.60	190	GSM 850	GPRS	26.5	25.63	-0.02	0 mm	Ant 1	DLXX702DKYD1	2	1:4.15	bottom	0.214	1.222	0.262	0.083	0.101	
836.60	190	GSM 850	GPRS	26.5	25.63	0.00	0 mm	Ant 1	DLXX702DKYD1	2	1:4.15	right	0.000	1.222	0.000	0.000	0.000	
836.60	190	GSM 850	GPRS	26.5	25.63	0.03	0 mm	Ant 1	DLXX702DKYD1	2	1:4.15	left	0.478	1.222	0.584	0.173	0.211	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram											

Table 10-2
GSM 850 Body SAR – Ant 3

MEASUREMENT RESULTS																		
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	# of GPRS Slots	Duty Cycle	Side	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #
MHz	Ch.												(W/kg)		(W/kg)	(W/kg)		
824.20	128	GSM 850	GPRS	27.2	27.18	-0.02	0 mm	Ant 3	DLXX702DKYD1	2	1:4.15	back	0.751	1.005	0.755	0.402	0.404	A1
836.60	190	GSM 850	GPRS	27.2	27.16	-0.14	0 mm	Ant 3	DLXX702DKYD1	2	1:4.15	back	0.651	1.009	0.657	0.354	0.357	
848.80	251	GSM 850	GPRS	27.2	27.11	0.00	0 mm	Ant 3	DLXX702DKYD1	2	1:4.15	back	0.578	1.021	0.590	0.305	0.311	
836.60	190	GSM 850	GPRS	27.2	27.16	0.00	0 mm	Ant 3	DLXX702DKYD1	2	1:4.15	top	0.261	1.009	0.263	0.095	0.096	
836.60	190	GSM 850	GPRS	27.2	27.16	0.02	0 mm	Ant 3	DLXX702DKYD1	2	1:4.15	right	0.545	1.009	0.550	0.210	0.212	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram										

Table 10-3
GSM 1900 Body SAR – Ant 4A

MEASUREMENT RESULTS																			Plot
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	# of GPRS Slots	Duty Cycle	Side	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)		
MHz	Ch.												(W/kg)		(W/kg)		(W/kg)		
1880.00	661	GSM 1900	GPRS	19.9	19.84	-0.09	0 mm	Ant 4A	DLXX702DKYD1	2	1:4.15	back	0.558	1.014	0.566	0.292	0.296		
1880.00	661	GSM 1900	GPRS	19.9	19.84	-0.02	0 mm	Ant 4A	DLXX702DKYD1	2	1:4.15	top	0.252	1.014	0.256	0.090	0.091		
1880.00	661	GSM 1900	GPRS	19.9	19.84	-0.19	0 mm	Ant 4A	DLXX702DKYD1	2	1:4.15	right	0.001	1.014	0.001	0.000	0.000		
1850.20	512	GSM 1900	GPRS	19.9	19.90	0.14	0 mm	Ant 4A	DLXX702DKYD1	2	1:4.15	left	0.712	1.000	0.712	0.286	0.286		
1880.00	661	GSM 1900	GPRS	19.9	19.84	-0.21	0 mm	Ant 4A	DLXX702DKYD1	2	1:4.15	left	0.645	1.014	0.654	0.263	0.267		
1909.80	810	GSM 1900	GPRS	19.9	19.80	0.02	0 mm	Ant 4A	DLXX702DKYD1	2	1:4.15	left	0.708	1.023	0.724	0.280	0.286		
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram											

FCC ID: BCGA2014	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 136 of 195

Table 10-4
GSM 1900 Body SAR – Ant 4B

MEASUREMENT RESULTS																		
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	# of GPRS Slots	Duty Cycle	Side	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #
MHz	Ch.												(W/kg)		(W/kg)	(W/kg)		
1850.20	512	GSM 1900	GPRS	20.4	20.40	-0.04	0 mm	Ant 4B	DLXX702DKYD1	2	1:4.15	back	0.735	1.000	0.735	0.310	0.310	
1880.00	661	GSM 1900	GPRS	20.4	20.32	-0.14	0 mm	Ant 4B	DLXX702DKYD1	2	1:4.15	back	0.762	1.019	0.776	0.328	0.334	
1909.80	810	GSM 1900	GPRS	20.4	20.31	-0.14	0 mm	Ant 4B	DLXX702DKYD1	2	1:4.15	back	0.776	1.021	0.792	0.322	0.329	A2
1880.00	661	GSM 1900	GPRS	20.4	20.32	-0.05	0 mm	Ant 4B	DLXX702DKYD1	2	1:4.15	top	0.589	1.019	0.600	0.242	0.247	
1880.00	661	GSM 1900	GPRS	20.4	20.32	0.12	0 mm	Ant 4B	DLXX702DKYD1	2	1:4.15	right	0.009	1.019	0.009	0.005	0.005	
1880.00	661	GSM 1900	GPRS	20.4	20.32	0.13	0 mm	Ant 4B	DLXX702DKYD1	2	1:4.15	left	0.038	1.019	0.039	0.016	0.016	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram											

Table 10-5
GSM 1900 Body SAR – Ant 2A

MEASUREMENT RESULTS																		
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	# of GPRS Slots	Duty Cycle	Side	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #
MHz	Ch.												(W/kg)		(W/kg)	(W/kg)		
1880.00	661	GSM 1900	GPRS	20.1	20.01	-0.06	0 mm	Ant 2A	DLXX702DKYD1	2	1:4.15	back	0.611	1.021	0.624	0.314	0.321	
1880.00	661	GSM 1900	GPRS	20.1	20.01	0.00	0 mm	Ant 2A	DLXX702DKYD1	2	1:4.15	bottom	0.185	1.021	0.189	0.071	0.072	
1850.20	512	GSM 1900	GPRS	20.1	19.99	0.07	0 mm	Ant 2A	DLXX702DKYD1	2	1:4.15	right	0.652	1.026	0.669	0.271	0.278	
1880.00	661	GSM 1900	GPRS	20.1	20.01	0.06	0 mm	Ant 2A	DLXX702DKYD1	2	1:4.15	right	0.691	1.021	0.706	0.277	0.283	
1909.80	810	GSM 1900	GPRS	20.1	20.02	0.03	0 mm	Ant 2A	DLXX702DKYD1	2	1:4.15	right	0.694	1.019	0.707	0.286	0.291	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram											

Table 10-6
GSM 1900 Body SAR – Ant 2B

MEASUREMENT RESULTS																		
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	# of GPRS Slots	Duty Cycle	Side	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #
MHz	Ch.												(W/kg)		(W/kg)	(W/kg)		
1850.20	512	GSM 1900	GPRS	20.0	19.92	-0.07	0 mm	Ant 2B	DLXX702DKYD1	2	1:4.15	back	0.711	1.019	0.725	0.297	0.303	
1880.00	661	GSM 1900	GPRS	20.0	19.91	-0.02	0 mm	Ant 2B	DLXX702DKYD1	2	1:4.15	back	0.718	1.021	0.733	0.297	0.303	
1909.80	810	GSM 1900	GPRS	20.0	19.92	-0.03	0 mm	Ant 2B	DLXX702DKYD1	2	1:4.15	back	0.716	1.019	0.730	0.294	0.300	
1880.00	661	GSM 1900	GPRS	20.0	19.91	0.02	0 mm	Ant 2B	DLXX702DKYD1	2	1:4.15	bottom	0.471	1.021	0.481	0.190	0.194	
1880.00	661	GSM 1900	GPRS	20.0	19.91	-0.07	0 mm	Ant 2B	DLXX702DKYD1	2	1:4.15	right	0.022	1.021	0.022	0.009	0.009	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram										

FCC ID: BCGA2014		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 137 of 195

Table 10-7
UMTS 850 Body SAR – Ant 1

MEASUREMENT RESULTS																	
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	Duty Cycle	Side	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	(W/kg)	(W/kg)	
836.60	4183	UMTS 850	RMC	20.8	20.48	0.00	0 mm	Ant 1	DLXX7032KYD1	1:1	back	0.519	1.076	0.558	0.275	0.296	
836.60	4183	UMTS 850	RMC	20.8	20.48	0.01	0 mm	Ant 1	DLXX7032KYD1	1:1	bottom	0.331	1.076	0.356	0.146	0.157	
836.60	4183	UMTS 850	RMC	20.8	20.48	0.01	0 mm	Ant 1	DLXX7032KYD1	1:1	right	0.030	1.076	0.032	0.011	0.012	
826.40	4132	UMTS 850	RMC	20.8	20.41	-0.05	0 mm	Ant 1	DLXX7032KYD1	1:1	left	0.865	1.094	0.946	0.296	0.324	
836.60	4183	UMTS 850	RMC	20.8	20.48	-0.03	0 mm	Ant 1	DLXX7032KYD1	1:1	left	0.798	1.076	0.859	0.270	0.291	
846.60	4233	UMTS 850	RMC	20.8	20.40	-0.03	0 mm	Ant 1	DLXX7032KYD1	1:1	left	0.709	1.096	0.777	0.248	0.272	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram										

Table 10-8
UMTS 850 Body SAR – Ant 3

MEASUREMENT RESULTS																	
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	Duty Cycle	Side	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	(W/kg)		
826.40	4132	UMTS 850	RMC	21.4	21.33	-0.01	0 mm	Ant 3	DLXX7032KYD1	1:1	back	0.863	1.016	0.877	0.478	0.486	
836.60	4183	UMTS 850	RMC	21.4	21.37	0.14	0 mm	Ant 3	DLXX7032KYD1	1:1	back	0.794	1.007	0.800	0.435	0.438	
846.60	4233	UMTS 850	RMC	21.4	21.26	0.01	0 mm	Ant 3	DLXX7032KYD1	1:1	back	0.698	1.033	0.721	0.383	0.396	
836.60	4183	UMTS 850	RMC	21.4	21.37	0.12	0 mm	Ant 3	DLXX7032KYD1	1:1	top	0.346	1.007	0.348	0.153	0.154	
826.40	4132	UMTS 850	RMC	21.4	21.33	-0.04	0 mm	Ant 3	DLXX7032KYD1	1:1	right	0.934	1.016	0.949	0.381	0.387	A3
836.60	4183	UMTS 850	RMC	21.4	21.37	-0.07	0 mm	Ant 3	DLXX7032KYD1	1:1	right	0.901	1.007	0.907	0.369	0.372	
846.60	4233	UMTS 850	RMC	21.4	21.26	0.00	0 mm	Ant 3	DLXX7032KYD1	1:1	right	0.814	1.033	0.841	0.335	0.346	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram										

Table 10-9
UMTS 1750 Body SAR – Ant 4A

MEASUREMENT RESULTS																	
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	Duty Cycle	Side	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	(W/kg)		
1712.40	1312	UMTS 1750	RMC	15.0	14.99	0.04	0 mm	Ant 4A	DLXX702RKYD1	1:1	back	1.100	1.002	1.102	0.562	0.563	
1732.40	1412	UMTS 1750	RMC	15.0	15.00	0.02	0 mm	Ant 4A	DLXX702RKYD1	1:1	back	1.110	1.000	1.110	0.570	0.570	
1752.60	1513	UMTS 1750	RMC	15.0	14.93	0.02	0 mm	Ant 4A	DLXX702RKYD1	1:1	back	1.100	1.016	1.118	0.559	0.568	
1732.40	1412	UMTS 1750	RMC	15.0	15.00	-0.02	0 mm	Ant 4A	DLXX702RKYD1	1:1	top	0.270	1.000	0.270	0.106	0.106	
1732.40	1412	UMTS 1750	RMC	15.0	15.00	0.19	0 mm	Ant 4A	DLXX702RKYD1	1:1	right	0.003	1.000	0.003	0.001	0.001	
1712.40	1312	UMTS 1750	RMC	15.0	14.99	-0.02	0 mm	Ant 4A	DLXX702RKYD1	1:1	left	1.010	1.002	1.012	0.419	0.420	
1732.40	1412	UMTS 1750	RMC	15.0	15.00	0.02	0 mm	Ant 4A	DLXX702RKYD1	1:1	left	1.060	1.000	1.060	0.435	0.435	
1752.60	1513	UMTS 1750	RMC	15.0	14.93	0.01	0 mm	Ant 4A	DLXX702RKYD1	1:1	left	1.030	1.016	1.046	0.422	0.429	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT							Body										
Spatial Peak							1.6 W/kg (mW/g)										
Uncontrolled Exposure/General Population							averaged over 1 gram										

FCC ID: BCGA2014		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 138 of 195

Table 10-10
UMTS 1750 Body SAR – Ant 4B

MEASUREMENT RESULTS																	
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	Duty Cycle	Side	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)		(W/kg)	
1712.40	1312	UMTS 1750	RMC	15.0	14.96	-0.07	0 mm	Ant 4B	DLXX702RKYD1	1:1	back	1.040	1.009	1.049	0.450	0.454	
1732.40	1412	UMTS 1750	RMC	15.0	14.99	0.19	0 mm	Ant 4B	DLXX702RKYD1	1:1	back	1.130	1.002	1.132	0.485	0.486	
1752.60	1513	UMTS 1750	RMC	15.0	15.00	-0.11	0 mm	Ant 4B	DLXX702RKYD1	1:1	back	1.150	1.000	1.150	0.495	0.495	A4
1712.40	1312	UMTS 1750	RMC	15.0	14.96	0.00	0 mm	Ant 4B	DLXX702RKYD1	1:1	top	0.947	1.009	0.956	0.391	0.395	
1732.40	1412	UMTS 1750	RMC	15.0	14.99	0.00	0 mm	Ant 4B	DLXX702RKYD1	1:1	top	0.970	1.002	0.972	0.397	0.398	
1752.60	1513	UMTS 1750	RMC	15.0	15.00	0.00	0 mm	Ant 4B	DLXX702RKYD1	1:1	top	0.993	1.000	0.993	0.404	0.404	
1732.40	1412	UMTS 1750	RMC	15.0	14.99	0.08	0 mm	Ant 4B	DLXX702RKYD1	1:1	right	0.011	1.002	0.011	0.006	0.006	
1732.40	1412	UMTS 1750	RMC	15.0	14.99	0.00	0 mm	Ant 4B	DLXX702RKYD1	1:1	left	0.050	1.002	0.050	0.022	0.022	
1752.60	1513	UMTS 1750	RMC	15.0	15.00	0.15	0 mm	Ant 4B	DLXX702RKYD1	1:1	back	1.060	1.000	1.060	0.460	0.460	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram										

Note: Blue entry represents variability measurement.

Table 10-11
UMTS 1750 Body SAR – Ant 2A

MEASUREMENT RESULTS																	
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	Duty Cycle	Side	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	(W/kg)		
1712.40	1312	UMTS 1750	RMC	15.0	14.23	0.00	0 mm	Ant 2A	DLXX702RKYD1	1:1	back	0.781	1.194	0.933	0.394	0.470	
1732.40	1412	UMTS 1750	RMC	15.0	14.17	0.01	0 mm	Ant 2A	DLXX702RKYD1	1:1	back	0.803	1.211	0.972	0.406	0.492	
1752.60	1513	UMTS 1750	RMC	15.0	14.05	0.01	0 mm	Ant 2A	DLXX702RKYD1	1:1	back	0.821	1.245	1.022	0.416	0.518	
1732.40	1412	UMTS 1750	RMC	15.0	14.17	-0.03	0 mm	Ant 2A	DLXX702RKYD1	1:1	bottom	0.200	1.211	0.242	0.076	0.092	
1712.40	1312	UMTS 1750	RMC	15.0	14.23	0.02	0 mm	Ant 2A	DLXX702RKYD1	1:1	right	0.766	1.194	0.915	0.316	0.377	
1732.40	1412	UMTS 1750	RMC	15.0	14.17	0.03	0 mm	Ant 2A	DLXX702RKYD1	1:1	right	0.775	1.211	0.939	0.314	0.380	
1752.60	1513	UMTS 1750	RMC	15.0	14.05	0.03	0 mm	Ant 2A	DLXX702RKYD1	1:1	right	0.769	1.245	0.957	0.314	0.391	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram										

Table 10-12
UMTS 1750 Body SAR – Ant 2B

MEASUREMENT RESULTS																	
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	Duty Cycle	Side	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	(W/kg)		
1712.40	1312	UMTS 1750	RMC	15.0	14.56	-0.04	0 mm	Ant 2B	DLXX702RKYD1	1:1	back	1.040	1.107	1.151	0.441	0.488	
1732.40	1412	UMTS 1750	RMC	15.0	14.57	-0.01	0 mm	Ant 2B	DLXX702RKYD1	1:1	back	1.060	1.104	1.170	0.447	0.493	
1752.60	1513	UMTS 1750	RMC	15.0	14.47	-0.04	0 mm	Ant 2B	DLXX702RKYD1	1:1	back	1.050	1.130	1.187	0.445	0.503	
1732.40	1412	UMTS 1750	RMC	15.0	14.57	-0.02	0 mm	Ant 2B	DLXX702RKYD1	1:1	bottom	0.518	1.104	0.572	0.218	0.241	
1732.40	1412	UMTS 1750	RMC	15.0	14.57	0.00	0 mm	Ant 2B	DLXX702RKYD1	1:1	right	0.032	1.104	0.035	0.015	0.017	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram										

FCC ID: BCGA2014		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 139 of 195

Table 10-13
UMTS 1900 Body SAR – Ant 4A

MEASUREMENT RESULTS																	
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	Duty Cycle	Side	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	(W/kg)		
1852.40	9262	UMTS 1900	RMC	15.4	14.69	-0.04	0 mm	Ant 4A	DLXX7032KYD1	1:1	back	0.718	1.178	0.846	0.383	0.451	
1880.00	9400	UMTS 1900	RMC	15.4	14.62	-0.03	0 mm	Ant 4A	DLXX7032KYD1	1:1	back	0.695	1.197	0.832	0.370	0.443	
1907.60	9538	UMTS 1900	RMC	15.4	14.65	-0.02	0 mm	Ant 4A	DLXX7032KYD1	1:1	back	0.704	1.189	0.837	0.372	0.442	
1880.00	9400	UMTS 1900	RMC	15.4	14.62	-0.06	0 mm	Ant 4A	DLXX7032KYD1	1:1	top	0.291	1.197	0.348	0.107	0.128	
1880.00	9400	UMTS 1900	RMC	15.4	14.62	0.13	0 mm	Ant 4A	DLXX7032KYD1	1:1	right	0.001	1.197	0.001	0.000	0.000	
1852.40	9262	UMTS 1900	RMC	15.4	14.69	-0.01	0 mm	Ant 4A	DLXX7032KYD1	1:1	left	0.981	1.178	1.156	0.397	0.468	
1880.00	9400	UMTS 1900	RMC	15.4	14.62	0.01	0 mm	Ant 4A	DLXX7032KYD1	1:1	left	0.982	1.197	1.175	0.396	0.474	
1907.60	9538	UMTS 1900	RMC	15.4	14.65	-0.01	0 mm	Ant 4A	DLXX7032KYD1	1:1	left	1.000	1.189	1.189	0.400	0.476	A5
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak							Body 1.6 W/kg (mW/g)										
Uncontrolled Exposure/General Population							averaged over 1 gram										

Table 10-14
UMTS 1900 Body SAR – Ant 4B

MEASUREMENT RESULTS																	
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	Duty Cycle	Side	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	(W/kg)		
1852.40	9262	UMTS 1900	RMC	14.5	13.69	-0.08	0 mm	Ant 4B	DLXX7032KYD1	1:1	back	0.985	1.205	1.187	0.414	0.499	
1880.00	9400	UMTS 1900	RMC	14.5	13.53	-0.04	0 mm	Ant 4B	DLXX7032KYD1	1:1	back	0.926	1.250	1.158	0.388	0.485	
1907.60	9538	UMTS 1900	RMC	14.5	13.59	-0.07	0 mm	Ant 4B	DLXX7032KYD1	1:1	back	0.893	1.233	1.101	0.371	0.457	
1852.40	9262	UMTS 1900	RMC	14.5	13.69	-0.06	0 mm	Ant 4B	DLXX7032KYD1	1:1	top	0.707	1.205	0.852	0.294	0.354	
1880.00	9400	UMTS 1900	RMC	14.5	13.53	-0.05	0 mm	Ant 4B	DLXX7032KYD1	1:1	top	0.714	1.250	0.893	0.285	0.356	
1907.60	9538	UMTS 1900	RMC	14.5	13.59	-0.06	0 mm	Ant 4B	DLXX7032KYD1	1:1	top	0.770	1.233	0.949	0.315	0.388	
1880.00	9400	UMTS 1900	RMC	14.5	13.53	0.17	0 mm	Ant 4B	DLXX7032KYD1	1:1	right	0.012	1.250	0.015	0.006	0.008	
1880.00	9400	UMTS 1900	RMC	14.5	13.53	0.15	0 mm	Ant 4B	DLXX7032KYD1	1:1	left	0.036	1.250	0.045	0.015	0.019	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram										

Table 10-15
UMTS 1900 Body SAR – Ant 2A

MEASUREMENT RESULTS																	
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	Duty Cycle	Side	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	(W/kg)		
1852.40	9262	UMTS 1900	RMC	15.4	14.62	-0.06	0 mm	Ant 2A	DLXX7032KYD1	1:1	back	0.859	1.197	1.028	0.450	0.539	
1880.00	9400	UMTS 1900	RMC	15.4	14.47	-0.07	0 mm	Ant 2A	DLXX7032KYD1	1:1	back	0.871	1.239	1.079	0.455	0.564	
1907.60	9538	UMTS 1900	RMC	15.4	14.40	-0.13	0 mm	Ant 2A	DLXX7032KYD1	1:1	back	0.799	1.259	1.006	0.413	0.520	
1880.00	9400	UMTS 1900	RMC	15.4	14.47	-0.06	0 mm	Ant 2A	DLXX7032KYD1	1:1	bottom	0.258	1.239	0.320	0.100	0.124	
1852.40	9262	UMTS 1900	RMC	15.4	14.62	-0.02	0 mm	Ant 2A	DLXX7032KYD1	1:1	right	0.895	1.197	1.071	0.361	0.432	
1880.00	9400	UMTS 1900	RMC	15.4	14.47	0.00	0 mm	Ant 2A	DLXX7032KYD1	1:1	right	0.886	1.239	1.098	0.354	0.439	
1907.60	9538	UMTS 1900	RMC	15.4	14.40	0.05	0 mm	Ant 2A	DLXX7032KYD1	1:1	right	0.890	1.259	1.121	0.354	0.446	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram										

FCC ID: BCGA2014		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device		Page 140 of 195

Table 10-16
UMTS 1900 Body SAR – Ant 2B

MEASUREMENT RESULTS																	
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	Duty Cycle	Side	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	(W/kg)		
1852.40	9262	UMTS 1900	RMC	15.3	14.95	-0.11	0 mm	Ant 2B	DLXX7032KYD1	1:1	back	0.990	1.084	1.073	0.423	0.459	
1880.00	9400	UMTS 1900	RMC	15.3	14.87	-0.13	0 mm	Ant 2B	DLXX7032KYD1	1:1	back	0.954	1.104	1.053	0.405	0.447	
1907.60	9538	UMTS 1900	RMC	15.3	14.93	-0.09	0 mm	Ant 2B	DLXX7032KYD1	1:1	back	0.998	1.089	1.087	0.421	0.458	
1880.00	9400	UMTS 1900	RMC	15.3	14.87	-0.02	0 mm	Ant 2B	DLXX7032KYD1	1:1	bottom	0.534	1.104	0.590	0.226	0.250	
1880.00	9400	UMTS 1900	RMC	15.3	14.87	0.04	0 mm	Ant 2B	DLXX7032KYD1	1:1	right	0.039	1.104	0.043	0.017	0.019	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram									

Table 10-17
LTE Band 71 Body SAR – Ant 1

MEASUREMENT RESULTS																						
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Antenna Config.	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #	
MHz	Ch.															(W/kg)		(W/kg)	(W/kg)			
680.50	133297	Mid	LTE Band 71	20	23.1	22.73	-0.10	0	Ant 1	DLX0702GKYD1	QPSK	1	0	0 mm	back	1:1	0.660	1.089	0.719	0.248	0.270	
680.50	133297	Mid	LTE Band 71	20	23.1	22.72	-0.07	0	Ant 1	DLX0702GKYD1	QPSK	50	0	0 mm	back	1:1	0.658	1.091	0.718	0.246	0.268	
680.50	133297	Mid	LTE Band 71	20	23.1	22.73	-0.02	0	Ant 1	DLX0702GKYD1	QPSK	1	0	0 mm	bottom	1:1	0.733	1.089	0.798	0.267	0.291	
680.50	133297	Mid	LTE Band 71	20	23.1	22.72	-0.03	0	Ant 1	DLX0702GKYD1	QPSK	50	0	0 mm	bottom	1:1	0.711	1.091	0.776	0.258	0.281	
680.50	133297	Mid	LTE Band 71	20	23.1	22.73	-0.08	0	Ant 1	DLX0702GKYD1	QPSK	1	0	0 mm	right	1:1	0.010	1.089	0.011	0.005	0.005	
680.50	133297	Mid	LTE Band 71	20	23.1	22.72	0.12	0	Ant 1	DLX0702GKYD1	QPSK	50	0	0 mm	right	1:1	0.008	1.091	0.009	0.004	0.004	
680.50	133297	Mid	LTE Band 71	20	23.1	22.73	-0.05	0	Ant 1	DLX0702GKYD1	QPSK	1	0	0 mm	left	1:1	0.896	1.089	0.976	0.287	0.313	
680.50	133297	Mid	LTE Band 71	20	23.1	22.72	-0.04	0	Ant 1	DLX0702GKYD1	QPSK	50	0	0 mm	left	1:1	0.865	1.091	0.944	0.273	0.298	
680.50	133297	Mid	LTE Band 71	20	23.1	22.57	-0.04	0	Ant 1	DLX0702GKYD1	QPSK	100	0	0 mm	left	1:1	0.815	1.130	0.921	0.259	0.293	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram														

Table 10-18
LTE Band 71 Body SAR – Ant 3

MEASUREMENT RESULTS																						
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Antenna Config.	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #	
MHz	Ch.															(W/kg)		(W/kg)	(W/kg)			
680.50	133297	Mid	LTE Band 71	20	23.1	22.56	-0.03	0	Ant 3	DLX0702GKYD1	QPSK	1	0	0 mm	back	1:1	0.938	1.132	1.062	0.474	0.537	A6
680.50	133297	Mid	LTE Band 71	20	23.1	22.57	-0.03	0	Ant 3	DLX0702GKYD1	QPSK	50	0	0 mm	back	1:1	0.835	1.130	0.944	0.427	0.483	
680.50	133297	Mid	LTE Band 71	20	23.1	22.54	-0.05	0	Ant 3	DLX0702GKYD1	QPSK	100	0	0 mm	back	1:1	0.790	1.138	0.899	0.402	0.457	
680.50	133297	Mid	LTE Band 71	20	23.1	22.56	-0.02	0	Ant 3	DLX0702GKYD1	QPSK	1	0	0 mm	top	1:1	0.702	1.132	0.795	0.249	0.282	
680.50	133297	Mid	LTE Band 71	20	23.1	22.57	-0.02	0	Ant 3	DLX0702GKYD1	QPSK	50	0	0 mm	top	1:1	0.650	1.130	0.735	0.228	0.258	
680.50	133297	Mid	LTE Band 71	20	23.1	22.56	-0.16	0	Ant 3	DLX0702GKYD1	QPSK	1	0	0 mm	right	1:1	0.852	1.132	0.964	0.264	0.299	
680.50	133297	Mid	LTE Band 71	20	23.1	22.57	0.13	0	Ant 3	DLX0702GKYD1	QPSK	50	0	0 mm	right	1:1	0.760	1.130	0.859	0.233	0.263	
680.50	133297	Mid	LTE Band 71	20	23.1	22.54	-0.01	0	Ant 3	DLX0702GKYD1	QPSK	100	0	0 mm	right	1:1	0.706	1.138	0.803	0.218	0.248	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram														

FCC ID: BCGA2014		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 141 of 195

Table 10-19
LTE Band 12 Body SAR – Ant 1

MEASUREMENT RESULTS																						
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Antenna Config.	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #	
MHz	Ch.															(W/kg)		(W/kg)	(W/kg)			
707.50	23095	Mid	LTE Band 12	10	19.7	19.70	-0.03	0	Ant 1	DLX0702GKYD1	QPSK	1	0	0 mm	back	1:1	0.621	1.000	0.621	0.285	0.285	
707.50	23095	Mid	LTE Band 12	10	19.7	19.66	-0.03	0	Ant 1	DLX0702GKYD1	QPSK	25	25	0 mm	back	1:1	0.534	1.009	0.539	0.247	0.249	
707.50	23095	Mid	LTE Band 12	10	19.7	19.70	-0.03	0	Ant 1	DLX0702GKYD1	QPSK	1	0	0 mm	bottom	1:1	0.499	1.000	0.499	0.179	0.179	
707.50	23095	Mid	LTE Band 12	10	19.7	19.66	-0.06	0	Ant 1	DLX0702GKYD1	QPSK	25	25	0 mm	bottom	1:1	0.474	1.009	0.478	0.167	0.169	
707.50	23095	Mid	LTE Band 12	10	19.7	19.70	0.15	0	Ant 1	DLX0702GKYD1	QPSK	1	0	0 mm	right	1:1	0.003	1.000	0.003	0.002	0.002	
707.50	23095	Mid	LTE Band 12	10	19.7	19.66	0.20	0	Ant 1	DLX0702GKYD1	QPSK	25	25	0 mm	right	1:1	0.004	1.009	0.004	0.002	0.002	
707.50	23095	Mid	LTE Band 12	10	19.7	19.70	0.19	0	Ant 1	DLX0702GKYD1	QPSK	1	0	0 mm	left	1:1	1.060	1.000	1.060	0.330	0.330	
707.50	23095	Mid	LTE Band 12	10	19.7	19.66	0.02	0	Ant 1	DLX0702GKYD1	QPSK	25	25	0 mm	left	1:1	0.957	1.009	0.966	0.301	0.304	
707.50	23095	Mid	LTE Band 12	10	19.7	19.63	0.01	0	Ant 1	DLX0702GKYD1	QPSK	50	0	0 mm	left	1:1	0.993	1.016	1.009	0.311	0.316	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Body														
Spatial Peak								1.6 W/kg (mW/g)														
Uncontrolled Exposure/General Population								averaged over 1 gram														

Table 10-20
LTE Band 12 Body SAR – Ant 3

MEASUREMENT RESULTS																						
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Antenna Config.	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #	
MHz	Ch.															(W/kg)		(W/kg)	(W/kg)			
707.50	23095	Mid	LTE Band 12	10	21.7	21.69	-0.04	0	Ant 3	DLX0702CKYD1	QPSK	1	0	0 mm	back	1:1	1.120	1.002	1.122	0.579	0.580	A7
707.50	23095	Mid	LTE Band 12	10	21.7	21.70	-0.04	0	Ant 3	DLX0702CKYD1	QPSK	25	25	0 mm	back	1:1	1.040	1.000	1.040	0.533	0.533	
707.50	23095	Mid	LTE Band 12	10	21.7	21.67	-0.07	0	Ant 3	DLX0702CKYD1	QPSK	50	0	0 mm	back	1:1	1.060	1.007	1.067	0.545	0.549	
707.50	23095	Mid	LTE Band 12	10	21.7	21.69	0.01	0	Ant 3	DLX0702CKYD1	QPSK	1	0	0 mm	top	1:1	0.611	1.002	0.612	0.216	0.216	
707.50	23095	Mid	LTE Band 12	10	21.7	21.70	-0.02	0	Ant 3	DLX0702CKYD1	QPSK	25	25	0 mm	top	1:1	0.590	1.000	0.590	0.210	0.210	
707.50	23095	Mid	LTE Band 12	10	21.7	21.69	-0.05	0	Ant 3	DLX0702CKYD1	QPSK	1	0	0 mm	right	1:1	1.040	1.002	1.042	0.369	0.370	
707.50	23095	Mid	LTE Band 12	10	21.7	21.70	-0.01	0	Ant 3	DLX0702CKYD1	QPSK	25	25	0 mm	right	1:1	0.906	1.000	0.906	0.321	0.321	
707.50	23095	Mid	LTE Band 12	10	21.7	21.67	0.01	0	Ant 3	DLX0702CKYD1	QPSK	50	0	0 mm	right	1:1	0.957	1.007	0.964	0.332	0.334	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Body														
Spatial Peak								1.6 W/kg (mW/g)														
Uncontrolled Exposure/General Population								averaged over 1 gram														

Table 10-21
LTE Band 13 Body SAR – Ant 1

MEASUREMENT RESULTS																					
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Antenna Config.	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #
MHz	Ch.															(W/kg)		(W/kg)	(W/kg)		
782.00	23230	Mid	LTE Band 13	10	23.6	23.60	-0.04	0	Ant 1	DLX0702CKYD1	QPSK	1	0	0 mm	back	1:1	1.000	0.726	0.289	0.289	
782.00	23230	Mid	LTE Band 13	10	22.6	22.56	0.00	1	Ant 1	DLX0702CKYD1	QPSK	25	0	0 mm	back	1:1	1.009	0.560	0.211	0.213	
782.00	23230	Mid	LTE Band 13	10	23.6	23.60	0.03	0	Ant 1	DLX0702CKYD1	QPSK	1	0	0 mm	bottom	1:1	1.000	0.691	0.266	0.266	
782.00	23230	Mid	LTE Band 13	10	22.6	22.56	-0.01	1	Ant 1	DLX0702CKYD1	QPSK	25	0	0 mm	bottom	1:1	1.009	0.532	0.203	0.205	
782.00	23230	Mid	LTE Band 13	10	23.6	23.60	0.02	0	Ant 1	DLX0702CKYD1	QPSK	1	0	0 mm	right	1:1	1.000	0.015	0.007	0.007	
782.00	23230	Mid	LTE Band 13	10	22.6	22.56	0.20	1	Ant 1	DLX0702CKYD1	QPSK	25	0	0 mm	right	1:1	1.009	0.009	0.005	0.005	
782.00	23230	Mid	LTE Band 13	10	23.6	23.60	-0.09	0	Ant 1	DLX0702CKYD1	QPSK	1	0	0 mm	left	1:1	1.000	0.932	0.319	0.319	
782.00	23230	Mid	LTE Band 13	10	22.6	22.56	-0.05	1	Ant 1	DLX0702CKYD1	QPSK	25	0	0 mm	left	1:1	1.009	0.705	0.236	0.238	
782.00	23230	Mid	LTE Band 13	10	22.6	22.51	-0.04	1	Ant 1	DLX0702CKYD1	QPSK	50	0	0 mm	left	1:1	1.021	0.757	0.234	0.239	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Body													
Spatial Peak								1.6 W/kg (mW/g)													
Uncontrolled Exposure/General Population								averaged over 1 gram													

FCC ID: BCGA2014		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 142 of 195

Table 10-22
LTE Band 13 Body SAR – Ant 3

MEASUREMENT RESULTS																						
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Antenna Config.	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #	
MHz	Ch.															(W/kg)		(W/kg)	(W/kg)			
782.00	23230	Mid	LTE Band 13	10	22.2	22.15	-0.04	0	Ant 3	DLX0702CKYD1	QPSK	1	0	0 mm	back	1:1	1.130	1.012	1.144	0.570	0.577	A8
782.00	23230	Mid	LTE Band 13	10	22.2	22.18	-0.02	0	Ant 3	DLX0702CKYD1	QPSK	25	0	0 mm	back	1:1	1.090	1.005	1.095	0.552	0.555	
782.00	23230	Mid	LTE Band 13	10	22.2	22.08	-0.04	0	Ant 3	DLX0702CKYD1	QPSK	50	0	0 mm	back	1:1	1.030	1.028	1.059	0.521	0.536	
782.00	23230	Mid	LTE Band 13	10	22.2	22.15	-0.03	0	Ant 3	DLX0702CKYD1	QPSK	1	0	0 mm	top	1:1	0.584	1.012	0.591	0.207	0.209	
782.00	23230	Mid	LTE Band 13	10	22.2	22.18	0.02	0	Ant 3	DLX0702CKYD1	QPSK	25	0	0 mm	top	1:1	0.563	1.005	0.566	0.203	0.204	
782.00	23230	Mid	LTE Band 13	10	22.2	22.15	0.03	0	Ant 3	DLX0702CKYD1	QPSK	1	0	0 mm	right	1:1	1.010	1.012	1.022	0.369	0.373	
782.00	23230	Mid	LTE Band 13	10	22.2	22.18	-0.01	0	Ant 3	DLX0702CKYD1	QPSK	25	0	0 mm	right	1:1	0.981	1.005	0.986	0.358	0.360	
782.00	23230	Mid	LTE Band 13	10	22.2	22.08	0.02	0	Ant 3	DLX0702CKYD1	QPSK	50	0	0 mm	right	1:1	0.922	1.028	0.948	0.339	0.348	
782.00	23230	Mid	LTE Band 13	10	22.2	22.15	-0.02	0	Ant 3	DLX0702CKYD1	QPSK	1	0	0 mm	back	1:1	0.986	1.012	0.998	0.527	0.533	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT									Body													
Spatial Peak									1.6 W/kg (mW/g)													
Uncontrolled Exposure/General Population									averaged over 1 gram													

Note: Blue entry represents variability measurement.

Table 10-23
LTE Band 14 Body SAR – Ant 1

MEASUREMENT RESULTS																						
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Antenna Config.	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #	
MHz	Ch.															(W/kg)		(W/kg)	(W/kg)			
793.00	23330	Mid	LTE Band 14	10	23.6	23.60	-0.02	0	Ant 1	DLX0702CKYD1	QPSK	1	0	0 mm	back	1:1	0.711	1.000	0.711	0.287	0.287	
793.00	23330	Mid	LTE Band 14	10	22.6	22.58	0.02	1	Ant 1	DLX0702CKYD1	QPSK	25	0	0 mm	back	1:1	0.544	1.005	0.547	0.211	0.212	
793.00	23330	Mid	LTE Band 14	10	23.6	23.60	-0.06	0	Ant 1	DLX0702CKYD1	QPSK	1	0	0 mm	bottom	1:1	0.686	1.000	0.686	0.276	0.276	
793.00	23330	Mid	LTE Band 14	10	22.6	22.58	-0.04	1	Ant 1	DLX0702CKYD1	QPSK	25	0	0 mm	bottom	1:1	0.512	1.005	0.515	0.202	0.203	
793.00	23330	Mid	LTE Band 14	10	23.6	23.60	0.05	0	Ant 1	DLX0702CKYD1	QPSK	1	0	0 mm	right	1:1	0.008	1.000	0.008	0.004	0.004	
793.00	23330	Mid	LTE Band 14	10	22.6	22.58	0.18	1	Ant 1	DLX0702CKYD1	QPSK	25	0	0 mm	right	1:1	0.008	1.005	0.008	0.004	0.004	
793.00	23330	Mid	LTE Band 14	10	23.6	23.60	-0.06	0	Ant 1	DLX0702CKYD1	QPSK	1	0	0 mm	left	1:1	0.910	1.000	0.910	0.288	0.288	
793.00	23330	Mid	LTE Band 14	10	22.6	22.58	-0.05	1	Ant 1	DLX0702CKYD1	QPSK	25	0	0 mm	left	1:1	0.710	1.005	0.714	0.220	0.221	
793.00	23330	Mid	LTE Band 14	10	22.6	22.56	-0.05	1	Ant 1	DLX0702CKYD1	QPSK	50	0	0 mm	left	1:1	0.665	1.009	0.671	0.210	0.212	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT																						
Spatial Peak									Body													
Uncontrolled Exposure/General Population									1.6 W/kg (mW/g)													
									averaged over 1 gram													

Table 10-24
LTE Band 14 Body SAR – Ant 3

MEASUREMENT RESULTS																						
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Antenna Config.	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #	
MHz	Ch.															(W/kg)		(W/kg)	(W/kg)			
793.00	23330	Mid	LTE Band 14	10	22.2	22.18	-0.07	0	Ant 3	DLX0702CKYD1	QPSK	1	0	0 mm	back	1:1	0.961	1.005	0.966	0.485	0.487	A9
793.00	23330	Mid	LTE Band 14	10	22.2	22.19	-0.07	0	Ant 3	DLX0702CKYD1	QPSK	25	0	0 mm	back	1:1	0.900	1.002	0.902	0.453	0.454	
793.00	23330	Mid	LTE Band 14	10	22.2	22.16	-0.06	0	Ant 3	DLX0702CKYD1	QPSK	50	0	0 mm	back	1:1	0.913	1.009	0.921	0.461	0.465	
793.00	23330	Mid	LTE Band 14	10	22.2	22.18	-0.04	0	Ant 3	DLX0702CKYD1	QPSK	1	0	0 mm	top	1:1	0.700	1.005	0.704	0.269	0.270	
793.00	23330	Mid	LTE Band 14	10	22.2	22.19	0.00	0	Ant 3	DLX0702CKYD1	QPSK	25	0	0 mm	top	1:1	0.533	1.002	0.534	0.204	0.204	
793.00	23330	Mid	LTE Band 14	10	22.2	22.18	-0.02	0	Ant 3	DLX0702CKYD1	QPSK	1	0	0 mm	right	1:1	0.844	1.005	0.848	0.315	0.317	
793.00	23330	Mid	LTE Band 14	10	22.2	22.19	-0.08	0	Ant 3	DLX0702CKYD1	QPSK	25	0	0 mm	right	1:1	0.779	1.002	0.781	0.295	0.296	
793.00	23330	Mid	LTE Band 14	10	22.2	22.16	0.02	0	Ant 3	DLX0702CKYD1	QPSK	50	0	0 mm	right	1:1	0.767	1.009	0.774	0.296	0.299	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Body 1.6 W/kg (mW/g) averaged over 1 gram													

FCC ID: BCGA2014		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 143 of 195

Table 10-25
LTE Band 5 (Cell) Body SAR- Ant 1

MEASUREMENT RESULTS																						
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Antenna Config.	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #	
MHz	Ch.															(W/kg)		(W/kg)	(W/kg)			
836.50	20525	Mid	LTE Band 5 (Cell)	10	20.8	20.79	-0.04	0	Ant 1	DLX0702DKYD1	QPSK	1	49	0 mm	back	1:1	0.791	1.002	0.793	0.334	0.335	
836.50	20525	Mid	LTE Band 5 (Cell)	10	20.8	20.80	-0.06	0	Ant 1	DLX0702DKYD1	QPSK	25	0	0 mm	back	1:1	0.814	1.000	0.814	0.342	0.342	
836.50	20525	Mid	LTE Band 5 (Cell)	10	20.8	20.77	-0.04	0	Ant 1	DLX0702DKYD1	QPSK	50	0	0 mm	back	1:1	0.820	1.007	0.826	0.341	0.343	
836.50	20525	Mid	LTE Band 5 (Cell)	10	20.8	20.79	0.00	0	Ant 1	DLX0702DKYD1	QPSK	1	49	0 mm	bottom	1:1	0.356	1.002	0.357	0.138	0.138	
836.50	20525	Mid	LTE Band 5 (Cell)	10	20.8	20.80	0.02	0	Ant 1	DLX0702DKYD1	QPSK	25	0	0 mm	bottom	1:1	0.351	1.000	0.351	0.136	0.136	
836.50	20525	Mid	LTE Band 5 (Cell)	10	20.8	20.79	0.10	0	Ant 1	DLX0702DKYD1	QPSK	1	49	0 mm	right	1:1	0.004	1.002	0.004	0.002	0.002	
836.50	20525	Mid	LTE Band 5 (Cell)	10	20.8	20.80	0.18	0	Ant 1	DLX0702DKYD1	QPSK	25	0	0 mm	right	1:1	0.001	1.000	0.001	0.000	0.000	
836.50	20525	Mid	LTE Band 5 (Cell)	10	20.8	20.79	0.00	0	Ant 1	DLX0702DKYD1	QPSK	1	49	0 mm	left	1:1	0.991	1.002	0.993	0.377	0.378	
836.50	20525	Mid	LTE Band 5 (Cell)	10	20.8	20.80	0.01	0	Ant 1	DLX0702DKYD1	QPSK	25	0	0 mm	left	1:1	1.020	1.000	1.020	0.385	0.385	A10
836.50	20525	Mid	LTE Band 5 (Cell)	10	20.8	20.77	0.03	0	Ant 1	DLX0702DKYD1	QPSK	50	0	0 mm	left	1:1	1.010	1.007	1.017	0.382	0.385	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Body 1.6 W/kg (mW/g) averaged over 1 gram													

Table 10-26
LTE Band 5 (Cell) Body SAR- Ant 3

MEASUREMENT RESULTS																						
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Antenna Config.	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #	
MHz	Ch.															(W/kg)		(W/kg)	(W/kg)			
836.50	20525	Mid	LTE Band 5 (Cell)	10	21.4	21.38	0.13	0	Ant 3	DLXX702GKYD1	QPSK	1	49	0 mm	back	1:1	0.777	1.005	0.781	0.414	0.416	
836.50	20525	Mid	LTE Band 5 (Cell)	10	21.4	21.37	0.03	0	Ant 3	DLXX702GKYD1	QPSK	25	25	0 mm	back	1:1	0.791	1.007	0.797	0.418	0.421	
836.50	20525	Mid	LTE Band 5 (Cell)	10	21.4	21.38	0.04	0	Ant 3	DLX702GKYD1	QPSK	1	49	0 mm	top	1:1	0.316	1.005	0.318	0.115	0.116	
836.50	20525	Mid	LTE Band 5 (Cell)	10	21.4	21.37	0.03	0	Ant 3	DLX702GKYD1	QPSK	25	25	0 mm	top	1:1	0.318	1.007	0.320	0.115	0.116	
836.50	20525	Mid	LTE Band 5 (Cell)	10	21.4	21.38	-0.06	0	Ant 3	DLX702GKYD1	QPSK	1	49	0 mm	right	1:1	0.846	1.005	0.850	0.332	0.334	
836.50	20525	Mid	LTE Band 5 (Cell)	10	21.4	21.37	-0.04	0	Ant 3	DLX702GKYD1	QPSK	25	25	0 mm	right	1:1	0.858	1.007	0.864	0.338	0.340	
836.50	20525	Mid	LTE Band 5 (Cell)	10	21.4	21.33	-0.01	0	Ant 3	DLX702GKYD1	QPSK	50	0	0 mm	right	1:1	0.878	1.016	0.892	0.347	0.353	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram														

FCC ID: BCGA2014		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 144 of 195

Table 10-27
LTE Band 26 (Cell) Body SAR- Ant 1

MEASUREMENT RESULTS																						
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Antenna Config.	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #	
MHz	Ch.															(W/kg)		(W/kg)	(W/kg)			
819.00	26740	Low	LTE Band 26 (Cell)	10	20.8	20.61	0.06	0	Ant 1	DLXX7032KYD1	QPSK	1	0	0 mm	back	1:1	0.769	1.045	0.804	0.308	0.322	
831.50	26865	Mid	LTE Band 26 (Cell)	10	20.8	20.52	-0.05	0	Ant 1	DLXX7032KYD1	QPSK	1	49	0 mm	back	1:1	0.630	1.067	0.672	0.254	0.271	
844.00	26990	High	LTE Band 26 (Cell)	10	20.8	20.57	0.21	0	Ant 1	DLXX7032KYD1	QPSK	1	49	0 mm	back	1:1	0.611	1.054	0.644	0.246	0.259	
819.00	26740	Low	LTE Band 26 (Cell)	10	20.8	20.55	-0.03	0	Ant 1	DLXX7032KYD1	QPSK	25	25	0 mm	back	1:1	0.715	1.059	0.757	0.283	0.300	
819.00	26740	Low	LTE Band 26 (Cell)	10	20.8	20.50	-0.04	0	Ant 1	DLXX7032KYD1	QPSK	50	0	0 mm	back	1:1	0.595	1.072	0.638	0.238	0.255	
819.00	26740	Low	LTE Band 26 (Cell)	10	20.8	20.61	0.06	0	Ant 1	DLXX7032KYD1	QPSK	1	0	0 mm	bottom	1:1	0.283	1.045	0.296	0.112	0.117	
819.00	26740	Low	LTE Band 26 (Cell)	10	20.8	20.55	0.00	0	Ant 1	DLXX7032KYD1	QPSK	25	25	0 mm	bottom	1:1	0.284	1.059	0.301	0.115	0.122	
819.00	26740	Low	LTE Band 26 (Cell)	10	20.8	20.61	0.15	0	Ant 1	DLXX7032KYD1	QPSK	1	0	0 mm	right	1:1	0.002	1.045	0.002	0.001	0.001	
819.00	26740	Low	LTE Band 26 (Cell)	10	20.8	20.55	0.12	0	Ant 1	DLXX7032KYD1	QPSK	25	25	0 mm	right	1:1	0.001	1.059	0.001	0.000	0.000	
819.00	26740	Low	LTE Band 26 (Cell)	10	20.8	20.61	0.09	0	Ant 1	DLXX7032KYD1	QPSK	1	0	0 mm	left	1:1	1.040	1.045	1.087	0.390	0.408	
831.50	26865	Mid	LTE Band 26 (Cell)	10	20.8	20.52	0.01	0	Ant 1	DLXX7032KYD1	QPSK	1	49	0 mm	left	1:1	0.913	1.067	0.974	0.350	0.373	
844.00	26990	High	LTE Band 26 (Cell)	10	20.8	20.57	0.09	0	Ant 1	DLXX7032KYD1	QPSK	1	49	0 mm	left	1:1	0.840	1.054	0.885	0.316	0.333	
819.00	26740	Low	LTE Band 26 (Cell)	10	20.8	20.55	0.02	0	Ant 1	DLXX7032KYD1	QPSK	25	25	0 mm	left	1:1	1.020	1.059	1.080	0.377	0.399	
831.50	26865	Mid	LTE Band 26 (Cell)	10	20.8	20.47	-0.06	0	Ant 1	DLXX7032KYD1	QPSK	25	25	0 mm	left	1:1	0.939	1.079	1.013	0.355	0.383	
844.00	26990	High	LTE Band 26 (Cell)	10	20.8	20.54	-0.07	0	Ant 1	DLXX7032KYD1	QPSK	25	25	0 mm	left	1:1	1.010	1.062	1.073	0.381	0.405	
819.00	26740	Low	LTE Band 26 (Cell)	10	20.8	20.50	0.01	0	Ant 1	DLXX7032KYD1	QPSK	50	0	0 mm	left	1:1	1.060	1.072	1.136	0.383	0.411	A11
819.00	26740	Low	LTE Band 26 (Cell)	10	20.8	20.50	-0.18	0	Ant 1	DLXX7032KYD1	QPSK	50	0	0 mm	left	1:1	0.934	1.072	1.001	0.339	0.363	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Body														
Spatial Peak								1.6 W/kg (mW/g)														
Uncontrolled Exposure/General Population								averaged over 1 gram														

Note: Blue entry represents variability measurement.

Table 10-28
LTE Band 26 (Cell) Body SAR- Ant 3

MEASUREMENT RESULTS																						
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Antenna Config.	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #	
MHz	Ch.															(W/kg)		(W/kg)	(W/kg)			
819.00	26740	Low	LTE Band 26 (Cell)	10	21.4	21.36	0.00	0	Ant 3	DLXX7032KYD1	QPSK	1	0	0 mm	back	1:1	0.766	1.009	0.773	0.410	0.414	
819.00	26740	Low	LTE Band 26 (Cell)	10	21.4	21.35	-0.01	0	Ant 3	DLXX7032KYD1	QPSK	25	25	0 mm	back	1:1	0.777	1.012	0.786	0.417	0.422	
819.00	26740	Low	LTE Band 26 (Cell)	10	21.4	21.36	0.01	0	Ant 3	DLXX7032KYD1	QPSK	1	0	0 mm	top	1:1	0.490	1.009	0.494	0.185	0.187	
819.00	26740	Low	LTE Band 26 (Cell)	10	21.4	21.35	0.03	0	Ant 3	DLXX7032KYD1	QPSK	25	25	0 mm	top	1:1	0.510	1.012	0.516	0.191	0.193	
819.00	26740	Low	LTE Band 26 (Cell)	10	21.4	21.36	-0.01	0	Ant 3	DLXX7032KYD1	QPSK	1	0	0 mm	right	1:1	0.954	1.009	0.963	0.383	0.386	
831.50	26865	Mid	LTE Band 26 (Cell)	10	21.4	21.18	-0.02	0	Ant 3	DLXX7032KYD1	QPSK	1	49	0 mm	right	1:1	0.896	1.052	0.943	0.366	0.385	
844.00	26990	High	LTE Band 26 (Cell)	10	21.4	21.19	-0.06	0	Ant 3	DLXX7032KYD1	QPSK	1	0	0 mm	right	1:1	0.708	1.050	0.743	0.300	0.315	
819.00	26740	Low	LTE Band 26 (Cell)	10	21.4	21.35	-0.03	0	Ant 3	DLXX7032KYD1	QPSK	25	25	0 mm	right	1:1	0.943	1.012	0.954	0.379	0.384	
831.50	26865	Mid	LTE Band 26 (Cell)	10	21.4	21.16	0.02	0	Ant 3	DLXX7032KYD1	QPSK	25	12	0 mm	right	1:1	0.919	1.057	0.971	0.369	0.390	
844.00	26990	High	LTE Band 26 (Cell)	10	21.4	21.28	-0.08	0	Ant 3	DLXX7032KYD1	QPSK	25	0	0 mm	right	1:1	0.694	1.028	0.713	0.296	0.304	
819.00	26740	Low	LTE Band 26 (Cell)	10	21.4	21.34	-0.02	0	Ant 3	DLXX7032KYD1	QPSK	50	0	0 mm	right	1:1	0.950	1.014	0.963	0.376	0.381	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Body 1.6 W/kg (mW/g) averaged over 1 gram														
Spatial Peak																						
Uncontrolled Exposure/General Population																						

FCC ID: BCGA2014		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 145 of 195

Table 10-29
LTE Band 4 (AWS) Body SAR- Ant 2A

MEASUREMENT RESULTS																						
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Antenna Config.	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g) (W/kg)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #	
MHz	Ch.																	(W/kg)	(W/kg)	(W/kg)		
1732.50	20175	Mid	LTE Band 4 (AWS)	20	15.0	14.99	0.03	0	Ant 2A	DLX0501MKYD1	QPSK	1	0	0 mm	back	1:1	0.994	1.002	0.996	0.490	0.491	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	15.0	14.88	0.05	0	Ant 2A	DLX0501MKYD1	QPSK	50	25	0 mm	back	1:1	0.983	1.028	1.011	0.483	0.497	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	15.0	14.87	0.05	0	Ant 2A	DLX0501MKYD1	QPSK	100	0	0 mm	back	1:1	0.996	1.030	1.026	0.489	0.504	A12
1732.50	20175	Mid	LTE Band 4 (AWS)	20	15.0	14.99	-0.03	0	Ant 2A	DLX0501MKYD1	QPSK	1	0	0 mm	bottom	1:1	0.209	1.002	0.209	0.080	0.080	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	15.0	14.88	0.03	0	Ant 2A	DLX0501MKYD1	QPSK	50	25	0 mm	bottom	1:1	0.216	1.028	0.222	0.082	0.084	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	15.0	14.99	0.03	0	Ant 2A	DLX0501MKYD1	QPSK	1	0	0 mm	right	1:1	0.814	1.002	0.816	0.339	0.340	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	15.0	14.88	0.02	0	Ant 2A	DLX0501MKYD1	QPSK	50	25	0 mm	right	1:1	0.795	1.028	0.817	0.327	0.336	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	15.0	14.87	0.03	0	Ant 2A	DLX0501MKYD1	QPSK	100	0	0 mm	right	1:1	0.806	1.030	0.830	0.332	0.342	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT																						
Spatial Peak								Body														
Uncontrolled Exposure/General Population								1.6 W/kg (mW/g)														
								averaged over 1 gram														

Table 10-30
LTE Band 66 (AWS) Body SAR- Ant 4A

MEASUREMENT RESULTS																						
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Antenna Config.	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #	
MHz	Ch.															(W/kg)		(W/kg)	(W/kg)			
1720.00	132072	Low	LTE Band 66 (AWS)	20	15.0	14.82	0.04	0	Ant 4A	DLX0501MKYD1	QPSK	1	0	0 mm	back	1:1	1.010	1.042	1.052	0.501	0.522	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	15.0	14.93	0.00	0	Ant 4A	DLX0501MKYD1	QPSK	1	0	0 mm	back	1:1	1.030	1.016	1.046	0.511	0.519	
1770.00	132572	High	LTE Band 66 (AWS)	20	15.0	14.74	0.01	0	Ant 4A	DLX0501MKYD1	QPSK	1	0	0 mm	back	1:1	1.050	1.062	1.115	0.520	0.552	
1720.00	132072	Low	LTE Band 66 (AWS)	20	15.0	14.87	0.01	0	Ant 4A	DLX0501MKYD1	QPSK	50	0	0 mm	back	1:1	1.020	1.030	1.051	0.508	0.523	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	15.0	14.88	0.04	0	Ant 4A	DLX0501MKYD1	QPSK	50	0	0 mm	back	1:1	1.020	1.028	1.049	0.505	0.519	
1770.00	132572	High	LTE Band 66 (AWS)	20	15.0	14.66	0.01	0	Ant 4A	DLX0501MKYD1	QPSK	50	50	0 mm	back	1:1	1.030	1.081	1.113	0.504	0.545	
1720.00	132072	Low	LTE Band 66 (AWS)	20	15.0	14.86	0.03	0	Ant 4A	DLX0501MKYD1	QPSK	100	0	0 mm	back	1:1	1.030	1.033	1.064	0.511	0.528	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	15.0	14.93	0.03	0	Ant 4A	DLX0501MKYD1	QPSK	1	0	0 mm	top	1:1	0.266	1.016	0.270	0.107	0.109	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	15.0	14.88	0.14	0	Ant 4A	DLX0501MKYD1	QPSK	50	0	0 mm	top	1:1	0.259	1.028	0.266	0.104	0.107	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	15.0	14.93	0.14	0	Ant 4A	DLX0501MKYD1	QPSK	1	0	0 mm	right	1:1	0.009	1.016	0.009	0.004	0.004	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	15.0	14.88	0.04	0	Ant 4A	DLX0501MKYD1	QPSK	50	0	0 mm	right	1:1	0.008	1.028	0.008	0.004	0.004	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	15.0	14.93	-0.06	0	Ant 4A	DLX0501MKYD1	QPSK	1	0	0 mm	left	1:1	0.779	1.016	0.791	0.330	0.335	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	15.0	14.88	-0.04	0	Ant 4A	DLX0501MKYD1	QPSK	50	0	0 mm	left	1:1	0.766	1.028	0.787	0.324	0.333	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Body														
Spatial Peak								1.6 W/kg (mW/g)														
Uncontrolled Exposure/General Population								averaged over 1 gram														

Table 10-31
LTE Band 66 (AWS) Body SAR- Ant 4B

MEASUREMENT RESULTS																						
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Antenna Config.	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #	
MHz	Ch.															(W/kg)		(W/kg)	(W/kg)			
1720.00	132072	Low	LTE Band 66 (AWS)	20	15.0	14.92	0.01	0	Ant 4B	DLX0501MKYD1	QPSK	1	0	0 mm	back	1:1	1.020	1.019	1.039	0.438	0.446	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	15.0	14.95	0.07	0	Ant 4B	DLX0501MKYD1	QPSK	1	0	0 mm	back	1:1	1.090	1.012	1.103	0.471	0.477	
1770.00	132572	High	LTE Band 66 (AWS)	20	15.0	14.98	0.03	0	Ant 4B	DLX0501MKYD1	QPSK	1	0	0 mm	back	1:1	1.140	1.005	1.146	0.493	0.495	
1720.00	132072	Low	LTE Band 66 (AWS)	20	15.0	14.86	0.02	0	Ant 4B	DLX0501MKYD1	QPSK	50	0	0 mm	back	1:1	1.030	1.033	1.064	0.438	0.452	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	15.0	14.80	0.08	0	Ant 4B	DLX0501MKYD1	QPSK	50	0	0 mm	back	1:1	1.080	1.047	1.131	0.466	0.488	
1770.00	132572	High	LTE Band 66 (AWS)	20	15.0	14.91	0.07	0	Ant 4B	DLX0501MKYD1	QPSK	50	0	0 mm	back	1:1	1.110	1.021	1.133	0.478	0.488	
1770.00	132572	High	LTE Band 66 (AWS)	20	15.0	14.90	0.03	0	Ant 4B	DLX0501MKYD1	QPSK	100	0	0 mm	back	1:1	1.140	1.023	1.166	0.490	0.501	A13
1770.00	132572	High	LTE Band 66 (AWS)	20	15.0	14.98	0.00	0	Ant 4B	DLX0501MKYD1	QPSK	1	0	0 mm	top	1:1	0.722	1.005	0.726	0.302	0.304	
1770.00	132572	High	LTE Band 66 (AWS)	20	15.0	14.91	-0.01	0	Ant 4B	DLX0501MKYD1	QPSK	50	0	0 mm	top	1:1	0.700	1.021	0.715	0.291	0.297	
1770.00	132572	High	LTE Band 66 (AWS)	20	15.0	14.98	0.20	0	Ant 4B	DLX0501MKYD1	QPSK	1	0	0 mm	right	1:1	0.011	1.005	0.011	0.005	0.005	
1770.00	132572	High	LTE Band 66 (AWS)	20	15.0	14.91	0.17	0	Ant 4B	DLX0501MKYD1	QPSK	50	0	0 mm	right	1:1	0.010	1.021	0.010	0.005	0.005	
1770.00	132572	High	LTE Band 66 (AWS)	20	15.0	14.98	0.01	0	Ant 4B	DLX0501MKYD1	QPSK	1	0	0 mm	left	1:1	0.039	1.005	0.039	0.017	0.017	
1770.00	132572	High	LTE Band 66 (AWS)	20	15.0	14.91	0.00	0	Ant 4B	DLX0501MKYD1	QPSK	50	0	0 mm	left	1:1	0.037	1.021	0.038	0.015	0.015	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Body														
Spatial Peak								1.6 W/kg (mW/g)														
Uncontrolled Exposure/General Population								averaged over 1 gram														

FCC ID: BCGA2014		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 146 of 195

Table 10-32
LTE Band 66 (AWS) Body SAR- Ant 2A

MEASUREMENT RESULTS																						
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Antenna Config.	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #	
MHz	Ch.															(W/kg)		(W/kg)	(W/kg)			
1720.00	132072	Low	LTE Band 66 (AWS)	20	14.75	14.33	0.05	0	Ant 2A	DLX0501MKYD1	QPSK	1	0	0 mm	back	1:1	0.897	1.102	0.988	0.449	0.495	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	14.75	14.49	0.15	0	Ant 2A	DLX0501MKYD1	QPSK	1	0	0 mm	back	1:1	0.948	1.062	1.007	0.474	0.503	
1770.00	132572	High	LTE Band 66 (AWS)	20	14.75	14.38	0.06	0	Ant 2A	DLX0501MKYD1	QPSK	1	99	0 mm	back	1:1	0.943	1.089	1.027	0.472	0.514	
1720.00	132072	Low	LTE Band 66 (AWS)	20	14.75	14.39	0.03	0	Ant 2A	DLX0501MKYD1	QPSK	50	0	0 mm	back	1:1	0.899	1.086	0.976	0.449	0.488	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	14.75	14.45	0.08	0	Ant 2A	DLX0501MKYD1	QPSK	50	0	0 mm	back	1:1	0.937	1.072	1.004	0.468	0.502	
1770.00	132572	High	LTE Band 66 (AWS)	20	14.75	14.33	0.04	0	Ant 2A	DLX0501MKYD1	QPSK	50	50	0 mm	back	1:1	0.953	1.102	1.050	0.475	0.523	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	14.75	14.39	0.06	0	Ant 2A	DLX0501MKYD1	QPSK	100	0	0 mm	back	1:1	0.962	1.086	1.045	0.480	0.521	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	14.75	14.49	-0.02	0	Ant 2A	DLX0501MKYD1	QPSK	1	0	0 mm	bottom	1:1	0.203	1.062	0.216	0.077	0.082	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	14.75	14.45	0.00	0	Ant 2A	DLX0501MKYD1	QPSK	50	0	0 mm	bottom	1:1	0.201	1.072	0.215	0.076	0.081	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	14.75	14.49	0.04	0	Ant 2A	DLX0501MKYD1	QPSK	1	0	0 mm	right	1:1	0.750	1.062	0.797	0.310	0.329	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	14.75	14.45	0.03	0	Ant 2A	DLX0501MKYD1	QPSK	50	0	0 mm	right	1:1	0.745	1.072	0.799	0.307	0.329	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Body														
Spatial Peak								1.6 W/kg (mW/g)														
Uncontrolled Exposure/General Population								averaged over 1 gram														

Table 10-33
LTE Band 66 (AWS) Body SAR- Ant 2B

MEASUREMENT RESULTS																						
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Antenna Config.	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #	
MHz	Ch.															(W/kg)		(W/kg)	(W/kg)			
1720.00	132072	Low	LTE Band 66 (AWS)	20	15.0	14.18	-0.01	0	Ant 2B	DLX0501MKYD1	QPSK	1	99	0 mm	back	1:1	0.804	1.208	0.971	0.341	0.412	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	15.0	14.23	0.03	0	Ant 2B	DLX0501MKYD1	QPSK	1	99	0 mm	back	1:1	0.822	1.194	0.981	0.348	0.416	
1770.00	132572	High	LTE Band 66 (AWS)	20	15.0	14.27	0.08	0	Ant 2B	DLX0501MKYD1	QPSK	1	0	0 mm	back	1:1	0.820	1.183	0.970	0.348	0.412	
1720.00	132072	Low	LTE Band 66 (AWS)	20	15.0	14.15	0.03	0	Ant 2B	DLX0501MKYD1	QPSK	50	25	0 mm	back	1:1	0.779	1.216	0.947	0.331	0.402	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	15.0	14.21	0.00	0	Ant 2B	DLX0501MKYD1	QPSK	50	50	0 mm	back	1:1	0.808	1.199	0.969	0.342	0.410	
1770.00	132572	High	LTE Band 66 (AWS)	20	15.0	14.22	0.06	0	Ant 2B	DLX0501MKYD1	QPSK	50	50	0 mm	back	1:1	0.821	1.197	0.983	0.346	0.414	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	15.0	14.21	0.05	0	Ant 2B	DLX0501MKYD1	QPSK	100	0	0 mm	back	1:1	0.817	1.199	0.980	0.346	0.415	
1770.00	132572	High	LTE Band 66 (AWS)	20	15.0	14.27	-0.02	0	Ant 2B	DLX0501MKYD1	QPSK	1	0	0 mm	bottom	1:1	0.485	1.183	0.574	0.202	0.239	
1770.00	132572	High	LTE Band 66 (AWS)	20	15.0	14.22	0.01	0	Ant 2B	DLX0501MKYD1	QPSK	50	50	0 mm	bottom	1:1	0.478	1.197	0.572	0.199	0.238	
1770.00	132572	High	LTE Band 66 (AWS)	20	15.0	14.27	-0.01	0	Ant 2B	DLX0501MKYD1	QPSK	1	0	0 mm	right	1:1	0.031	1.183	0.037	0.015	0.018	
1770.00	132572	High	LTE Band 66 (AWS)	20	15.0	14.22	0.10	0	Ant 2B	DLX0501MKYD1	QPSK	50	50	0 mm	right	1:1	0.033	1.197	0.040	0.016	0.019	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT																						
Spatial Peak								Body														
Uncontrolled Exposure/General Population								1.6 W/kg (mW/g)														
								averaged over 1 gram														

FCC ID: BCGA2014		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 147 of 195

Table 10-34
LTE Band 25 (PCS) Body SAR – Ant 4A

MEASUREMENT RESULTS																						
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Antenna Config.	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #	
MHz	Ch.															(W/kg)		(W/kg)	(W/kg)			
1860.00	26140	Low	LTE Band 25 (PCS)	20	15.4	14.98	-0.03	0	Ant 4A	DLX0501MKYD1	QPSK	1	0	0 mm	back	1:1	0.952	1.102	1.049	0.488	0.538	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	15.4	14.75	-0.02	0	Ant 4A	DLX0501MKYD1	QPSK	1	0	0 mm	back	1:1	0.928	1.161	1.077	0.474	0.550	
1905.00	26590	High	LTE Band 25 (PCS)	20	15.4	14.83	-0.04	0	Ant 4A	DLX0501MKYD1	QPSK	1	0	0 mm	back	1:1	0.898	1.140	1.024	0.457	0.521	
1860.00	26140	Low	LTE Band 25 (PCS)	20	15.4	14.80	-0.01	0	Ant 4A	DLX0501MKYD1	QPSK	50	0	0 mm	back	1:1	0.935	1.148	1.073	0.479	0.550	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	15.4	14.69	-0.04	0	Ant 4A	DLX0501MKYD1	QPSK	50	0	0 mm	back	1:1	0.918	1.178	1.081	0.468	0.551	
1905.00	26590	High	LTE Band 25 (PCS)	20	15.4	14.71	0.02	0	Ant 4A	DLX0501MKYD1	QPSK	50	0	0 mm	back	1:1	0.900	1.172	1.055	0.458	0.537	
1860.00	26140	Low	LTE Band 25 (PCS)	20	15.4	14.74	-0.01	0	Ant 4A	DLX0501MKYD1	QPSK	100	0	0 mm	back	1:1	0.925	1.164	1.077	0.474	0.552	
1860.00	26140	Low	LTE Band 25 (PCS)	20	15.4	14.98	0.05	0	Ant 4A	DLX0501MKYD1	QPSK	1	0	0 mm	top	1:1	0.320	1.102	0.353	0.124	0.137	
1860.00	26140	Low	LTE Band 25 (PCS)	20	15.4	14.80	-0.01	0	Ant 4A	DLX0501MKYD1	QPSK	50	0	0 mm	top	1:1	0.318	1.148	0.365	0.124	0.142	
1860.00	26140	Low	LTE Band 25 (PCS)	20	15.4	14.98	0.15	0	Ant 4A	DLX0501MKYD1	QPSK	1	0	0 mm	right	1:1	0.002	1.102	0.002	0.001	0.001	
1860.00	26140	Low	LTE Band 25 (PCS)	20	15.4	14.80	0.15	0	Ant 4A	DLX0501MKYD1	QPSK	50	0	0 mm	right	1:1	0.001	1.148	0.001	0.000	0.000	
1860.00	26140	Low	LTE Band 25 (PCS)	20	15.4	14.98	0.02	0	Ant 4A	DLX0501MKYD1	QPSK	1	0	0 mm	left	1:1	0.943	1.102	1.039	0.385	0.424	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	15.4	14.75	-0.01	0	Ant 4A	DLX0501MKYD1	QPSK	1	0	0 mm	left	1:1	0.964	1.161	1.119	0.391	0.454	
1905.00	26590	High	LTE Band 25 (PCS)	20	15.4	14.83	0.00	0	Ant 4A	DLX0501MKYD1	QPSK	1	0	0 mm	left	1:1	0.958	1.140	1.092	0.387	0.441	
1860.00	26140	Low	LTE Band 25 (PCS)	20	15.4	14.80	0.02	0	Ant 4A	DLX0501MKYD1	QPSK	50	0	0 mm	left	1:1	0.941	1.148	1.080	0.382	0.439	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	15.4	14.69	-0.02	0	Ant 4A	DLX0501MKYD1	QPSK	50	0	0 mm	left	1:1	0.964	1.178	1.136	0.389	0.458	
1905.00	26590	High	LTE Band 25 (PCS)	20	15.4	14.71	0.02	0	Ant 4A	DLX0501MKYD1	QPSK	50	0	0 mm	left	1:1	0.966	1.172	1.132	0.387	0.454	
1860.00	26140	Low	LTE Band 25 (PCS)	20	15.4	14.74	0.01	0	Ant 4A	DLX0501MKYD1	QPSK	100	0	0 mm	left	1:1	0.942	1.164	1.096	0.382	0.445	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Body														
Spatial Peak								1.6 W/kg (mW/g)														
Uncontrolled Exposure/General Population								averaged over 1 gram														

Table 10-35
LTE Band 25 (PCS) Body SAR – Ant 4B

MEASUREMENT RESULTS																						
FREQUENCY			Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Antenna Config.	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #
MHz	Ch.	(W/kg)															(W/kg)		(W/kg)			
1860.00	26140	Low	LTE Band 25 (PCS)	20	14.5	14.32	-0.02	0	Ant 4B	DLX0501MKYD1	QPSK	1	50	0 mm	back	1:1	1.060	1.042	1.105	0.441	0.460	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	14.5	14.32	0.12	0	Ant 4B	DLX0501MKYD1	QPSK	1	0	0 mm	back	1:1	1.140	1.042	1.188	0.473	0.493	
1905.00	26590	High	LTE Band 25 (PCS)	20	14.5	14.44	0.17	0	Ant 4B	DLX0501MKYD1	QPSK	1	0	0 mm	back	1:1	1.160	1.014	1.176	0.475	0.482	
1860.00	26140	Low	LTE Band 25 (PCS)	20	14.5	14.43	-0.03	0	Ant 4B	DLX0501MKYD1	QPSK	50	0	0 mm	back	1:1	1.170	1.016	1.189	0.482	0.490	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	14.5	14.47	0.08	0	Ant 4B	DLX0501MKYD1	QPSK	50	0	0 mm	back	1:1	1.180	1.007	1.188	0.486	0.489	A14
1905.00	26590	High	LTE Band 25 (PCS)	20	14.5	14.48	-0.03	0	Ant 4B	DLX0501MKYD1	QPSK	50	0	0 mm	back	1:1	1.150	1.005	1.156	0.472	0.474	
1905.00	26590	High	LTE Band 25 (PCS)	20	14.5	14.43	0.01	0	Ant 4B	DLX0501MKYD1	QPSK	100	0	0 mm	back	1:1	1.170	1.016	1.189	0.478	0.486	
1905.00	26590	High	LTE Band 25 (PCS)	20	14.5	14.44	0.02	0	Ant 4B	DLX0501MKYD1	QPSK	1	0	0 mm	top	1:1	0.757	1.014	0.768	0.308	0.312	
1905.00	26590	High	LTE Band 25 (PCS)	20	14.5	14.48	0.02	0	Ant 4B	DLX0501MKYD1	QPSK	50	0	0 mm	top	1:1	0.759	1.005	0.763	0.309	0.311	
1905.00	26590	High	LTE Band 25 (PCS)	20	14.5	14.44	0.12	0	Ant 4B	DLX0501MKYD1	QPSK	1	0	0 mm	right	1:1	0.013	1.014	0.013	0.007	0.007	
1905.00	26590	High	LTE Band 25 (PCS)	20	14.5	14.48	0.13	0	Ant 4B	DLX0501MKYD1	QPSK	50	0	0 mm	right	1:1	0.013	1.005	0.013	0.007	0.007	
1905.00	26590	High	LTE Band 25 (PCS)	20	14.5	14.44	0.12	0	Ant 4B	DLX0501MKYD1	QPSK	1	0	0 mm	left	1:1	0.034	1.014	0.034	0.016	0.016	
1905.00	26590	High	LTE Band 25 (PCS)	20	14.5	14.48	0.13	0	Ant 4B	DLX0501MKYD1	QPSK	50	0	0 mm	left	1:1	0.031	1.005	0.031	0.015	0.015	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	14.5	14.47	-0.01	0	Ant 4B	DLX0501MKYD1	QPSK	50	0	0 mm	back	1:1	1.140	1.007	1.148	0.484	0.487	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT																						
Spatial Peak									Body													
Uncontrolled Exposure/General Population									1.6 W/kg (mW/g)													
									averaged over 1 gram													

Note: Blue entry represents variability measurement.

FCC ID: BCGA2014		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 148 of 195

Table 10-36
LTE Band 25 (PCS) Body SAR – Ant 2A

MEASUREMENT RESULTS																						
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Antenna Config.	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #	
MHz	Ch.															(W/kg)		(W/kg)	(W/kg)			
1860.00	26140	Low	LTE Band 25 (PCS)	20	15.4	15.37	0.02	0	Ant 2A	DLX0702GKYD1	QPSK	1	0	0 mm	back	1:1	1.150	1.007	1.158	0.576	0.580	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	15.4	15.34	0.14	0	Ant 2A	DLX0702GKYD1	QPSK	1	0	0 mm	back	1:1	1.100	1.014	1.115	0.550	0.558	
1905.00	26590	High	LTE Band 25 (PCS)	20	15.4	15.12	-0.01	0	Ant 2A	DLX0702GKYD1	QPSK	1	0	0 mm	back	1:1	1.110	1.067	1.184	0.550	0.587	
1860.00	26140	Low	LTE Band 25 (PCS)	20	15.4	15.25	0.15	0	Ant 2A	DLX0702GKYD1	QPSK	50	0	0 mm	back	1:1	1.070	1.035	1.107	0.539	0.558	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	15.4	15.10	0.03	0	Ant 2A	DLX0702GKYD1	QPSK	50	50	0 mm	back	1:1	1.010	1.072	1.083	0.500	0.536	
1905.00	26590	High	LTE Band 25 (PCS)	20	15.4	15.09	-0.03	0	Ant 2A	DLX0702GKYD1	QPSK	50	50	0 mm	back	1:1	1.010	1.074	1.085	0.498	0.535	
1860.00	26140	Low	LTE Band 25 (PCS)	20	15.4	15.20	-0.08	0	Ant 2A	DLX0702GKYD1	QPSK	100	0	0 mm	back	1:1	0.990	1.047	1.037	0.490	0.513	
1860.00	26140	Low	LTE Band 25 (PCS)	20	15.4	15.37	-0.05	0	Ant 2A	DLX0702GKYD1	QPSK	1	0	0 mm	bottom	1:1	0.441	1.007	0.444	0.158	0.159	
1860.00	26140	Low	LTE Band 25 (PCS)	20	15.4	15.25	-0.04	0	Ant 2A	DLX0702GKYD1	QPSK	50	0	0 mm	bottom	1:1	0.436	1.035	0.451	0.155	0.160	
1860.00	26140	Low	LTE Band 25 (PCS)	20	15.4	15.37	-0.04	0	Ant 2A	DLX0702GKYD1	QPSK	1	0	0 mm	right	1:1	1.130	1.007	1.138	0.454	0.457	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	15.4	15.34	-0.02	0	Ant 2A	DLX0702GKYD1	QPSK	1	0	0 mm	right	1:1	1.090	1.014	1.105	0.437	0.443	
1905.00	26590	High	LTE Band 25 (PCS)	20	15.4	15.12	-0.01	0	Ant 2A	DLX0702GKYD1	QPSK	1	0	0 mm	right	1:1	1.080	1.067	1.152	0.426	0.455	
1860.00	26140	Low	LTE Band 25 (PCS)	20	15.4	15.25	-0.04	0	Ant 2A	DLX0702GKYD1	QPSK	50	0	0 mm	right	1:1	1.120	1.035	1.159	0.446	0.462	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	15.4	15.10	-0.03	0	Ant 2A	DLX0702GKYD1	QPSK	50	50	0 mm	right	1:1	1.060	1.072	1.136	0.421	0.451	
1905.00	26590	High	LTE Band 25 (PCS)	20	15.4	15.09	-0.04	0	Ant 2A	DLX0702GKYD1	QPSK	50	50	0 mm	right	1:1	1.050	1.074	1.128	0.410	0.440	
1860.00	26140	Low	LTE Band 25 (PCS)	20	15.4	15.20	0.02	0	Ant 2A	DLX0702GKYD1	QPSK	100	0	0 mm	right	1:1	1.090	1.047	1.141	0.435	0.455	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Body														
Spatial Peak								1.6 W/kg (mW/g)														
Uncontrolled Exposure/General Population								averaged over 1 gram														

Table 10-37
LTE Band 25 (PCS) Body SAR – Ant 2B

MEASUREMENT RESULTS																						
FREQUENCY			Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Antenna Config.	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #
MHz	Ch.	(W/kg)															(W/kg)		(W/kg)			
1860.00	26140	Low	LTE Band 25 (PCS)	20	15.3	15.30	-0.05	0	Ant 2B	DLX0501MKYD1	QPSK	1	0	0 mm	back	1:1	0.974	1.000	0.974	0.405	0.405	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	15.3	15.28	-0.01	0	Ant 2B	DLX0501MKYD1	QPSK	1	0	0 mm	back	1:1	0.925	1.005	0.930	0.384	0.386	
1905.00	26590	High	LTE Band 25 (PCS)	20	15.3	15.04	0.04	0	Ant 2B	DLX0501MKYD1	QPSK	1	0	0 mm	back	1:1	0.896	1.062	0.952	0.371	0.394	
1860.00	26140	Low	LTE Band 25 (PCS)	20	15.3	15.17	0.02	0	Ant 2B	DLX0501MKYD1	QPSK	50	0	0 mm	back	1:1	0.956	1.030	0.985	0.397	0.409	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	15.3	15.08	0.01	0	Ant 2B	DLX0501MKYD1	QPSK	50	0	0 mm	back	1:1	0.911	1.052	0.958	0.377	0.397	
1905.00	26590	High	LTE Band 25 (PCS)	20	15.3	15.03	0.06	0	Ant 2B	DLX0501MKYD1	QPSK	50	0	0 mm	back	1:1	0.898	1.064	0.955	0.370	0.394	
1860.00	26140	Low	LTE Band 25 (PCS)	20	15.3	15.14	-0.01	0	Ant 2B	DLX0501MKYD1	QPSK	100	0	0 mm	back	1:1	0.924	1.038	0.959	0.384	0.399	
1860.00	26140	Low	LTE Band 25 (PCS)	20	15.3	15.30	0.02	0	Ant 2B	DLX0501MKYD1	QPSK	1	0	0 mm	bottom	1:1	0.674	1.000	0.674	0.280	0.280	
1860.00	26140	Low	LTE Band 25 (PCS)	20	15.3	15.17	-0.03	0	Ant 2B	DLX0501MKYD1	QPSK	50	0	0 mm	bottom	1:1	0.679	1.030	0.699	0.280	0.288	
1860.00	26140	Low	LTE Band 25 (PCS)	20	15.3	15.30	-0.08	0	Ant 2B	DLX0501MKYD1	QPSK	1	0	0 mm	right	1:1	0.026	1.000	0.026	0.013	0.013	
1860.00	26140	Low	LTE Band 25 (PCS)	20	15.3	15.17	0.10	0	Ant 2B	DLX0501MKYD1	QPSK	50	0	0 mm	right	1:1	0.026	1.030	0.027	0.013	0.013	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Body														
Spatial Peak								1.6 W/kg (mW/g)														
Uncontrolled Exposure/General Population								averaged over 1 gram														

FCC ID: BCGA2014		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 149 of 195

Table 10-38
LTE Band 30 Body SAR – Ant 4A

MEASUREMENT RESULTS																						
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Antenna Config.	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #	
MHz	Ch.															(W/kg)		(W/kg)	(W/kg)			
2310.00	27710	Mid	LTE Band 30	10	14.1	14.10	-0.13	0	Ant 4A	DLX0702DKYD1	QPSK	1	0	0 mm	back	1:1	1.160	1.000	1.160	0.549	0.549	A15
2310.00	27710	Mid	LTE Band 30	10	14.1	14.09	-0.16	0	Ant 4A	DLX0702DKYD1	QPSK	25	0	0 mm	back	1:1	1.150	1.002	1.152	0.545	0.546	
2310.00	27710	Mid	LTE Band 30	10	14.1	14.08	-0.17	0	Ant 4A	DLX0702DKYD1	QPSK	50	0	0 mm	back	1:1	1.130	1.005	1.136	0.536	0.539	
2310.00	27710	Mid	LTE Band 30	10	14.1	14.10	-0.16	0	Ant 4A	DLX0702DKYD1	QPSK	1	0	0 mm	top	1:1	0.449	1.000	0.449	0.142	0.142	
2310.00	27710	Mid	LTE Band 30	10	14.1	14.09	-0.11	0	Ant 4A	DLX0702DKYD1	QPSK	25	0	0 mm	top	1:1	0.454	1.002	0.455	0.143	0.143	
2310.00	27710	Mid	LTE Band 30	10	14.1	14.10	-0.12	0	Ant 4A	DLX0702DKYD1	QPSK	1	0	0 mm	right	1:1	0.000	1.000	0.000	0.000	0.000	
2310.00	27710	Mid	LTE Band 30	10	14.1	14.09	0.12	0	Ant 4A	DLX0702DKYD1	QPSK	25	0	0 mm	right	1:1	0.000	1.002	0.000	0.000	0.000	
2310.00	27710	Mid	LTE Band 30	10	14.1	14.10	0.02	0	Ant 4A	DLX0702DKYD1	QPSK	1	0	0 mm	left	1:1	1.040	1.000	1.040	0.382	0.382	
2310.00	27710	Mid	LTE Band 30	10	14.1	14.09	0.05	0	Ant 4A	DLX0702DKYD1	QPSK	25	0	0 mm	left	1:1	1.050	1.002	1.052	0.382	0.383	
2310.00	27710	Mid	LTE Band 30	10	14.1	14.08	0.03	0	Ant 4A	DLX0702DKYD1	QPSK	50	0	0 mm	left	1:1	1.050	1.005	1.055	0.381	0.383	
2310.00	27710	Mid	LTE Band 30	10	14.1	14.10	-0.08	0	Ant 4A	DLX0702DKYD1	QPSK	1	0	0 mm	back	1:1	1.110	1.000	1.110	0.521	0.521	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Body 1.6 W/kg (mW/g) averaged over 1 gram													

Note: Blue entry represents variability measurement.

Table 10-39
LTE Band 30 Body SAR – Ant 4B

MEASUREMENT RESULTS																						
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Antenna Config.	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #	
MHz	Ch.															(W/kg)		(W/kg)	(W/kg)			
2310.00	27710	Mid	LTE Band 30	10	13.5	13.50	0.05	0	Ant 4B	DLX0702DKYD1	QPSK	1	0	0 mm	back	1:1	1.110	1.000	1.110	0.440	0.440	
2310.00	27710	Mid	LTE Band 30	10	13.5	13.39	0.07	0	Ant 4B	DLX0702DKYD1	QPSK	25	0	0 mm	back	1:1	1.110	1.026	1.139	0.436	0.447	
2310.00	27710	Mid	LTE Band 30	10	13.5	13.38	0.05	0	Ant 4B	DLX0702DKYD1	QPSK	50	0	0 mm	back	1:1	1.120	1.028	1.151	0.440	0.452	
2310.00	27710	Mid	LTE Band 30	10	13.5	13.50	0.02	0	Ant 4B	DLX0702DKYD1	QPSK	1	0	0 mm	top	1:1	0.780	1.000	0.780	0.293	0.293	
2310.00	27710	Mid	LTE Band 30	10	13.5	13.39	-0.06	0	Ant 4B	DLX0702DKYD1	QPSK	25	0	0 mm	top	1:1	0.785	1.026	0.805	0.293	0.301	
2310.00	27710	Mid	LTE Band 30	10	13.5	13.38	-0.02	0	Ant 4B	DLX0702DKYD1	QPSK	50	0	0 mm	top	1:1	0.789	1.028	0.811	0.296	0.304	
2310.00	27710	Mid	LTE Band 30	10	13.5	13.50	0.16	0	Ant 4B	DLX0702DKYD1	QPSK	1	0	0 mm	right	1:1	0.028	1.000	0.028	0.013	0.013	
2310.00	27710	Mid	LTE Band 30	10	13.5	13.39	-0.06	0	Ant 4B	DLX0702DKYD1	QPSK	25	0	0 mm	right	1:1	0.028	1.026	0.029	0.013	0.013	
2310.00	27710	Mid	LTE Band 30	10	13.5	13.50	-0.05	0	Ant 4B	DLX0702DKYD1	QPSK	1	0	0 mm	left	1:1	0.055	1.000	0.055	0.023	0.023	
2310.00	27710	Mid	LTE Band 30	10	13.5	13.39	0.02	0	Ant 4B	DLX0702DKYD1	QPSK	25	0	0 mm	left	1:1	0.052	1.026	0.053	0.022	0.023	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak									Body 1.6 W/kg (mW/g)													
Uncontrolled Exposure/General Population									averaged over 1 gram													

Table 10-40
LTE Band 30 Body SAR – Ant 2A

MEASUREMENT RESULTS																					
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Antenna Config.	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #
MHz	Ch.															(W/kg)		(W/kg)	(W/kg)		
2310.00	27710	Mid	LTE Band 30	10	13.3	13.28	-0.10	0	Ant 2A	DLX0702DKYD1	QPSK	1	0	0 mm	back	1:1	1.005	0.976	0.448	0.450	
2310.00	27710	Mid	LTE Band 30	10	13.3	13.25	-0.15	0	Ant 2A	DLX0702DKYD1	QPSK	25	0	0 mm	back	1:1	1.012	0.968	0.440	0.445	
2310.00	27710	Mid	LTE Band 30	10	13.3	13.21	-0.21	0	Ant 2A	DLX0702DKYD1	QPSK	50	0	0 mm	back	1:1	1.021	0.982	0.442	0.451	
2310.00	27710	Mid	LTE Band 30	10	13.3	13.28	-0.18	0	Ant 2A	DLX0702DKYD1	QPSK	1	0	0 mm	bottom	1:1	1.005	0.386	0.121	0.122	
2310.00	27710	Mid	LTE Band 30	10	13.3	13.25	-0.18	0	Ant 2A	DLX0702DKYD1	QPSK	25	0	0 mm	bottom	1:1	1.012	0.380	0.118	0.119	
2310.00	27710	Mid	LTE Band 30	10	13.3	13.28	0.06	0	Ant 2A	DLX0702DKYD1	QPSK	1	0	0 mm	right	1:1	1.005	0.608	0.224	0.225	
2310.00	27710	Mid	LTE Band 30	10	13.3	13.25	0.03	0	Ant 2A	DLX0702DKYD1	QPSK	25	0	0 mm	right	1:1	1.012	0.591	0.221	0.224	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram													

FCC ID: BCGA2014		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device		Page 150 of 195

Table 10-41
LTE Band 30 Body SAR – Ant 2B

MEASUREMENT RESULTS																						
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Antenna Config.	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g) (W/kg)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #	
MHz	Ch.																	(W/kg)	(W/kg)	(W/kg)		
2310.00	27710	Mid	LTE Band 30	10	14.2	13.99	-0.06	0	Ant 2B	DLX0702CKYD1	QPSK	1	0	0 mm	back	1:1	1.080	1.050	1.134	0.415	0.436	
2310.00	27710	Mid	LTE Band 30	10	14.2	13.84	0.00	0	Ant 2B	DLX0702CKYD1	QPSK	25	0	0 mm	back	1:1	1.050	1.086	1.140	0.403	0.438	
2310.00	27710	Mid	LTE Band 30	10	14.2	13.79	-0.01	0	Ant 2B	DLX0702CKYD1	QPSK	50	0	0 mm	back	1:1	1.060	1.099	1.165	0.404	0.444	
2310.00	27710	Mid	LTE Band 30	10	14.2	13.99	-0.04	0	Ant 2B	DLX0702CKYD1	QPSK	1	0	0 mm	bottom	1:1	0.809	1.050	0.849	0.304	0.319	
2310.00	27710	Mid	LTE Band 30	10	14.2	13.84	-0.02	0	Ant 2B	DLX0702CKYD1	QPSK	25	0	0 mm	bottom	1:1	0.786	1.086	0.854	0.294	0.319	
2310.00	27710	Mid	LTE Band 30	10	14.2	13.79	-0.11	0	Ant 2B	DLX0702CKYD1	QPSK	50	0	0 mm	bottom	1:1	0.855	1.099	0.940	0.313	0.344	
2310.00	27710	Mid	LTE Band 30	10	14.2	13.99	-0.04	0	Ant 2B	DLX0702CKYD1	QPSK	1	0	0 mm	right	1:1	0.038	1.050	0.040	0.017	0.018	
2310.00	27710	Mid	LTE Band 30	10	14.2	13.84	-0.09	0	Ant 2B	DLX0702CKYD1	QPSK	25	0	0 mm	right	1:1	0.037	1.086	0.040	0.016	0.017	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Body														
Spatial Peak								1.6 W/kg (mW/g)														
Uncontrolled Exposure/General Population								averaged over 1 gram														

Table 10-42
LTE Band 7 Body SAR – Ant 4A

MEASUREMENT RESULTS																								
1 CC Uplink 2 CC Uplink	Component Carrier	FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Antenna Config.	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (lg)	Scaling Factor	Reported SAR (lg)	SAR (lg)	Reported SAR (lg)	Plot #	
		MHz	Ch.															(W/kg)		(W/kg)	(W/kg)	(W/kg)		
1 CC Uplink	N/A	2510.00	20850	Low	LTE Band 7	20	14.3	14.29	-0.13	0	Ant 4A	DLXX0702CKYD1	QPSK	1	0	0 mm	back	1:1	0.967	1.002	0.969	0.412	0.413	
1 CC Uplink	N/A	2535.00	21100	Mid	LTE Band 7	20	14.3	14.21	-0.13	0	Ant 4A	DLXX0702CKYD1	QPSK	1	0	0 mm	back	1:1	1.130	1.021	1.154	0.479	0.489	
1 CC Uplink	N/A	2560.00	21350	High	LTE Band 7	20	14.3	14.12	-0.14	0	Ant 4A	DLXX0702CKYD1	QPSK	1	0	0 mm	back	1:1	1.140	1.042	1.188	0.479	0.499	
2 CC Uplink	PCC	2560.00	21350	High	LTE Band 7	20	14.3	14.06	-0.12	0	Ant 4A	DLXX0702CKYD1	QPSK	1	0	0 mm	back	1:1	1.120	1.057	1.184	0.483	0.511	
2 CC Uplink	SCC	2540.20	21152	High									QPSK	1	99									
1 CC Uplink	N/A	2510.00	20850	Low	LTE Band 7	20	14.3	14.25	-0.13	0	Ant 4A	DLXX0702CKYD1	QPSK	50	0	0 mm	back	1:1	0.965	1.012	0.977	0.412	0.417	
1 CC Uplink	N/A	2535.00	21100	Mid	LTE Band 7	20	14.3	14.22	-0.14	0	Ant 4A	DLXX0702CKYD1	QPSK	50	0	0 mm	back	1:1	1.130	1.019	1.151	0.476	0.485	
1 CC Uplink	N/A	2560.00	21350	High	LTE Band 7	20	14.3	14.13	-0.14	0	Ant 4A	DLXX0702CKYD1	QPSK	50	25	0 mm	back	1:1	1.140	1.040	1.186	0.479	0.498	
1 CC Uplink	N/A	2560.00	21350	High	LTE Band 7	20	14.3	14.21	-0.13	0	Ant 4A	DLXX0702CKYD1	QPSK	100	0	0 mm	back	1:1	1.150	1.021	1.174	0.482	0.492	A16
1 CC Uplink	N/A	2510.00	20850	Low	LTE Band 7	20	14.3	14.29	-0.01	0	Ant 4A	DLXX0702CKYD1	QPSK	1	0	0 mm	top	1:1	0.661	1.002	0.662	0.199	0.199	
1 CC Uplink	N/A	2510.00	20850	Low	LTE Band 7	20	14.3	14.25	-0.02	0	Ant 4A	DLXX0702CKYD1	QPSK	50	0	0 mm	top	1:1	0.649	1.012	0.657	0.195	0.197	
1 CC Uplink	N/A	2510.00	20850	Low	LTE Band 7	20	14.3	14.29	0.16	0	Ant 4A	DLXX0702CKYD1	QPSK	1	0	0 mm	right	1:1	0.047	1.002	0.047	0.021	0.021	
1 CC Uplink	N/A	2510.00	20850	Low	LTE Band 7	20	14.3	14.25	0.00	0	Ant 4A	DLXX0702CKYD1	QPSK	50	0	0 mm	right	1:1	0.045	1.012	0.046	0.020	0.020	
1 CC Uplink	N/A	2510.00	20850	Low	LTE Band 7	20	14.3	14.29	-0.02	0	Ant 4A	DLXX0702CKYD1	QPSK	1	0	0 mm	left	1:1	0.537	1.002	0.538	0.202	0.202	
1 CC Uplink	N/A	2510.00	20850	Low	LTE Band 7	20	14.3	14.25	-0.04	0	Ant 4A	DLXX0702CKYD1	QPSK	50	0	0 mm	left	1:1	0.546	1.012	0.553	0.205	0.207	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT										Body														
Spatial Peak										1.6 W/kg (mW/g)														
Uncontrolled Exposure/General Population										averaged over 1 gram														

FCC ID: BCGA2014		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 151 of 195

Table 10-43
LTE Band 7 Body SAR – Ant 4B

MEASUREMENT RESULTS																			
1 CC Uplink 2 CC Uplink	Component Carrier	FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Antenna Config.	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor
		MHz	Ch.															(W/kg)	
1 CC Uplink	N/A	2510.00	20B50	Low	LTE Band 7	20	12.14	0.00	0	Ant 4B	DLX0702CKYD1	QPSK	1	0	0 mm	back	1:1	1.040	1.038
1 CC Uplink	N/A	2535.00	21100	Md	LTE Band 7	20	12.28	-0.01	0	Ant 4B	DLX0702CKYD1	QPSK	1	0	0 mm	back	1:1	1.080	1.005
1 CC Uplink	N/A	2560.00	21350	High	LTE Band 7	20	12.01	-0.01	0	Ant 4B	DLX0702CKYD1	QPSK	1	0	0 mm	back	1:1	1.110	1.069
1 CC Uplink	N/A	2510.00	20B50	Low	LTE Band 7	20	12.16	0.01	0	Ant 4B	DLX0702CKYD1	QPSK	50	0	0 mm	back	1:1	1.030	1.033
1 CC Uplink	N/A	2535.00	21100	Md	LTE Band 7	20	12.23	0.00	0	Ant 4B	DLX0702CKYD1	QPSK	50	0	0 mm	back	1:1	1.090	1.019
1 CC Uplink	N/A	2560.00	21350	High	LTE Band 7	20	12.09	0.04	0	Ant 4B	DLX0702CKYD1	QPSK	50	25	0 mm	back	1:1	1.130	1.050
2 CC Uplink	PCC	2560.00	21350	High	LTE Band 7	20	12.05	0.00	0	Ant 4B	DLX0702CKYD1	QPSK	1	0	0 mm	back	1:1	1.110	1.069
2 CC Uplink	SCC	2540.20	21152	High								QPSK	1	99					
1 CC Uplink	N/A	2535.00	21100	Md	LTE Band 7	20	12.16	0.03	0	Ant 4B	DLX0702CKYD1	QPSK	100	0	0 mm	back	1:1	1.110	1.033
1 CC Uplink	N/A	2535.00	21100	Md	LTE Band 7	20	12.28	-0.06	0	Ant 4B	DLX0702CKYD1	QPSK	1	0	0 mm	top	1:1	0.641	1.005
1 CC Uplink	N/A	2535.00	21100	Md	LTE Band 7	20	12.22	-0.06	0	Ant 4B	DLX0702CKYD1	QPSK	50	0	0 mm	top	1:1	0.645	1.019
1 CC Uplink	N/A	2535.00	21100	Md	LTE Band 7	20	12.28	0.16	0	Ant 4B	DLX0702CKYD1	QPSK	1	0	0 mm	right	1:1	0.037	1.005
1 CC Uplink	N/A	2535.00	21100	Md	LTE Band 7	20	12.23	0.13	0	Ant 4B	DLX0702CKYD1	QPSK	50	0	0 mm	right	1:1	0.033	1.019
1 CC Uplink	N/A	2535.00	21100	Md	LTE Band 7	20	12.28	0.04	0	Ant 4B	DLX0702CKYD1	QPSK	1	0	0 mm	left	1:1	0.064	1.005
1 CC Uplink	N/A	2535.00	21100	Md	LTE Band 7	20	12.23	-0.02	0	Ant 4B	DLX0702CKYD1	QPSK	50	0	0 mm	left	1:1	0.064	1.019
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Body 1.6 W/kg (mW/g) averaged over 1 gram									

Table 10-44
LTE Band 7 Body SAR – Ant 2A

MEASUREMENT RESULTS																			
1 CC Uplink 2 CC Uplink	Component Carrier	FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Antenna Config.	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor
		MHz	Ch.															(W/kg)	
1 CC Uplink	N/A	2510.00	20B50	Low	LTE Band 7	20	14.10	-0.15	0	Ant 2A	DLX0501MKYD1	QPSK	1	0	0 mm	back	1:1	1.100	1.000
1 CC Uplink	N/A	2535.00	21100	Md	LTE Band 7	20	14.08	-0.19	0	Ant 2A	DLX0501MKYD1	QPSK	1	0	0 mm	back	1:1	1.030	1.005
1 CC Uplink	N/A	2560.00	21350	High	LTE Band 7	20	13.96	-0.19	0	Ant 2A	DLX0501MKYD1	QPSK	1	99	0 mm	back	1:1	1.080	1.033
1 CC Uplink	N/A	2510.00	20B50	Low	LTE Band 7	20	14.10	-0.19	0	Ant 2A	DLX0501MKYD1	QPSK	50	0	0 mm	back	1:1	1.050	1.000
1 CC Uplink	N/A	2535.00	21100	Md	LTE Band 7	20	14.10	-0.19	0	Ant 2A	DLX0501MKYD1	QPSK	50	0	0 mm	back	1:1	1.040	1.002
1 CC Uplink	N/A	2560.00	21350	High	LTE Band 7	20	14.05	-0.12	0	Ant 2A	DLX0501MKYD1	QPSK	50	50	0 mm	back	1:1	1.120	1.012
2 CC Uplink	PCC	2560.00	21350	High	LTE Band 7	20	14.02	-0.13	0	Ant 2A	DLX0501MKYD1	QPSK	50	0	0 mm	back	1:1	1.060	1.019
2 CC Uplink	SCC	2540.20	21152	High								QPSK	50	50					
1 CC Uplink	N/A	2510.00	20B50	Low	LTE Band 7	20	14.10	-0.19	0	Ant 2A	DLX0501MKYD1	QPSK	100	0	0 mm	back	1:1	1.040	1.002
1 CC Uplink	N/A	2510.00	20B50	Low	LTE Band 7	20	14.10	-0.06	0	Ant 2A	DLX0501MKYD1	QPSK	1	0	0 mm	bottom	1:1	0.627	1.000
1 CC Uplink	N/A	2510.00	20B50	Low	LTE Band 7	20	14.10	-0.03	0	Ant 2A	DLX0501MKYD1	QPSK	50	0	0 mm	bottom	1:1	0.626	1.000
1 CC Uplink	N/A	2510.00	20B50	Low	LTE Band 7	20	14.10	-0.07	0	Ant 2A	DLX0501MKYD1	QPSK	1	0	0 mm	right	1:1	0.587	1.000
1 CC Uplink	N/A	2510.00	20B50	Low	LTE Band 7	20	14.10	-0.05	0	Ant 2A	DLX0501MKYD1	QPSK	50	0	0 mm	right	1:1	0.563	1.000
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Body 1.6 W/kg (mW/g) averaged over 1 gram									

FCC ID: BCGA2014		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 152 of 195

Table 10-45
LTE Band 7 Body SAR – Ant 2B

MEASUREMENT RESULTS																								
1 CC Uplink 2 CC Uplink	Component Carrier	FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Antenna Config.	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #	
		MHz	Ch.															(W/kg)		(W/kg)	(W/kg)			
1 CC Uplink	N/A	2510.00	20850	Low	LTE Band 7	20	13.0	12.98	-0.02	0	Ant 2B	DLX0702DKYD1	QPSK	1	0	0 mm	back	1:1	1.120	1.005	1.126	0.418	0.420	
1 CC Uplink	N/A	2535.00	21100	Mid	LTE Band 7	20	13.0	12.96	-0.12	0	Ant 2B	DLX0702DKYD1	QPSK	1	0	0 mm	back	1:1	1.150	1.009	1.160	0.420	0.424	
1 CC Uplink	N/A	2560.00	21350	High	LTE Band 7	20	13.0	12.96	0.02	0	Ant 2B	DLX0702DKYD1	QPSK	1	99	0 mm	back	1:1	0.999	1.009	1.008	0.371	0.374	
1 CC Uplink	N/A	2510.00	20850	Low	LTE Band 7	20	13.0	12.98	-0.04	0	Ant 2B	DLX0702DKYD1	QPSK	50	0	0 mm	back	1:1	1.140	1.005	1.146	0.422	0.424	
1 CC Uplink	N/A	2535.00	21100	Mid	LTE Band 7	20	13.0	12.86	-0.12	0	Ant 2B	DLX0702DKYD1	QPSK	50	0	0 mm	back	1:1	1.150	1.033	1.188	0.421	0.435	
2 CC Uplink	PCC	2535.00	21100	Mid	LTE Band 7	20	13.0	12.88	-0.05	0	Ant 2B	DLX0702DKYD1	QPSK	50	0	0 mm	back	1:1	1.100	1.028	1.131	0.425	0.437	
2 CC Uplink	SCC	2515.20	20902	Mid									QPSK	50	50									
1 CC Uplink	N/A	2560.00	21350	High	LTE Band 7	20	13.0	12.95	-0.16	0	Ant 2B	DLX0702DKYD1	QPSK	50	50	0 mm	back	1:1	1.030	1.012	1.042	0.381	0.386	
1 CC Uplink	N/A	2510.00	20850	Low	LTE Band 7	20	13.0	12.94	-0.12	0	Ant 2B	DLX0702DKYD1	QPSK	100	0	0 mm	back	1:1	1.140	1.014	1.156	0.423	0.429	
1 CC Uplink	N/A	2510.00	20850	Low	LTE Band 7	20	13.0	12.98	-0.05	0	Ant 2B	DLX0702DKYD1	QPSK	1	0	0 mm	bottom	1:1	0.719	1.005	0.723	0.259	0.260	
1 CC Uplink	N/A	2510.00	20850	Low	LTE Band 7	20	13.0	12.98	-0.07	0	Ant 2B	DLX0702DKYD1	QPSK	50	0	0 mm	bottom	1:1	0.730	1.005	0.734	0.262	0.263	
1 CC Uplink	N/A	2510.00	20850	Low	LTE Band 7	20	13.0	12.98	0.02	0	Ant 2B	DLX0702DKYD1	QPSK	1	0	0 mm	right	1:1	0.058	1.005	0.058	0.024	0.024	
1 CC Uplink	N/A	2510.00	20850	Low	LTE Band 7	20	13.0	12.98	0.07	0	Ant 2B	DLX0702DKYD1	QPSK	50	0	0 mm	right	1:1	0.060	1.005	0.060	0.025	0.025	
1 CC Uplink	N/A	2535.00	21100	Mid	LTE Band 7	20	13.0	12.86	-0.17	0	Ant 2B	DLX0702DKYD1	QPSK	50	0	0 mm	back	1:1	1.070	1.033	1.105	0.406	0.419	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT										Body														
Spatial Peak										1.6 W/kg (mW/g)														
Uncontrolled Exposure/General Population										averaged over 1 gram														

Note: Blue entry represents variability measurement.

Table 10-46
LTE Band 41 Body SAR – Ant 4A

MEASUREMENT RESULTS																								
1 CC Uplink 2 CC Uplink	Component Carrier	FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Antenna Config.	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #	
		MHz	Ch.															(W/kg)		(W/kg)	(W/kg)			
1 CC Uplink - Power Class 3	N/A	2506.00	39750	Low	LTE Band 41	20	17.3	17.29	-0.04	0	Ant 4A	DLX0702RKYD1	QPSK	1	0	0 mm	back	1:1.58	1.180	1.002	1.182	0.491	0.492	
1 CC Uplink - Power Class 2	N/A	2506.00	39750	Low	LTE Band 41	20	17.3	17.30	-0.04	0	Ant 4A	DLX0702RKYD1	QPSK	1	0	0 mm	back	1:2.31	0.771	1.000	0.771	0.326	0.326	
2 CC Uplink - Power Class 3	PCC	2506.00	39750	Low	LTE Band 41	20	17.3	17.12	-0.15	0	Ant 4A	DLX0702RKYD1	QPSK	1	99	0 mm	back	1:1.58	1.130	1.042	1.177	0.478	0.498	
2 CC Uplink - Power Class 3	SCC	2525.80	39948	Low									QPSK	1	0									
1 CC Uplink - Power Class 3	N/A	2549.50	40185	Low-Mid	LTE Band 41	20	17.3	17.05	-0.12	0	Ant 4A	DLX0702RKYD1	QPSK	1	0	0 mm	back	1:1.58	1.100	1.059	1.165	0.463	0.490	
1 CC Uplink - Power Class 3	N/A	2593.00	40620	Mid	LTE Band 41	20	17.3	17.03	-0.14	0	Ant 4A	DLX0702RKYD1	QPSK	1	0	0 mm	back	1:1.58	0.996	1.064	1.060	0.356	0.379	
1 CC Uplink - Power Class 3	N/A	2636.50	41055	Mid-High	LTE Band 41	20	17.3	16.81	-0.06	0	Ant 4A	DLX0702RKYD1	QPSK	1	99	0 mm	back	1:1.58	1.020	1.119	1.141	0.412	0.461	
1 CC Uplink - Power Class 3	N/A	2680.00	41490	High	LTE Band 41	20	17.3	16.79	-0.05	0	Ant 4A	DLX0702RKYD1	QPSK	1	0	0 mm	back	1:1.58	0.956	1.125	1.076	0.381	0.429	
1 CC Uplink - Power Class 3	N/A	2506.00	39750	Low	LTE Band 41	20	17.3	17.21	-0.07	0	Ant 4A	DLX0702RKYD1	QPSK	50	50	0 mm	back	1:1.58	1.030	1.021	1.052	0.431	0.440	
1 CC Uplink - Power Class 3	N/A	2549.50	40185	Low-Mid	LTE Band 41	20	17.3	17.00	0.17	0	Ant 4A	DLX0702RKYD1	QPSK	50	0	0 mm	back	1:1.58	1.090	1.072	1.168	0.454	0.487	
1 CC Uplink - Power Class 3	N/A	2593.00	40620	Mid	LTE Band 41	20	17.3	16.93	0.01	0	Ant 4A	DLX0702RKYD1	QPSK	50	0	0 mm	back	1:1.58	0.927	1.089	1.010	0.384	0.418	
1 CC Uplink - Power Class 3	N/A	2636.50	41055	Mid-High	LTE Band 41	20	17.3	16.79	0.14	0	Ant 4A	DLX0702RKYD1	QPSK	50	25	0 mm	back	1:1.58	0.863	1.125	0.971	0.335	0.377	
1 CC Uplink - Power Class 3	N/A	2680.00	41490	High	LTE Band 41	20	17.3	16.72	0.16	0	Ant 4A	DLX0702RKYD1	QPSK	50	0	0 mm	back	1:1.58	0.954	1.143	1.080	0.363	0.415	
1 CC Uplink - Power Class 3	N/A	2506.00	39750	Low	LTE Band 41	20	17.3	17.17	-0.06	0	Ant 4A	DLX0702RKYD1	QPSK	100	0	0 mm	back	1:1.58	1.030	1.030	1.061	0.425	0.438	
1 CC Uplink - Power Class 3	N/A	2506.00	39750	Low	LTE Band 41	20	17.3	17.29	0.17	0	Ant 4A	DLX0702RKYD1	QPSK	1	0	0 mm	top	1:1.58	0.514	1.002	0.515	0.166	0.166	
1 CC Uplink - Power Class 3	N/A	2506.00	39750	Low	LTE Band 41	20	17.3	17.21	-0.13	0	Ant 4A	DLX0702RKYD1	QPSK	50	50	0 mm	top	1:1.58	0.490	1.021	0.500	0.161	0.164	
1 CC Uplink - Power Class 3	N/A	2506.00	39750	Low	LTE Band 41	20	17.3	17.29	0.00	0	Ant 4A	DLX0702RKYD1	QPSK	1	0	0 mm	right	1:1.58	0.002	1.002	0.002	0.001	0.001	
1 CC Uplink - Power Class 3	N/A	2506.00	39750	Low	LTE Band 41	20	17.3	17.21	-0.11	0	Ant 4A	DLX0702RKYD1	QPSK	50	50	0 mm	right	1:1.58	0.001	1.021	0.001	0.000	0.000	
1 CC Uplink - Power Class 3	N/A	2506.00	39750	Low	LTE Band 41	20	17.3	17.29	-0.13	0	Ant 4A	DLX0702RKYD1	QPSK	1	0	0 mm	left	1:1.58	0.515	1.002	0.516	0.195	0.195	
1 CC Uplink - Power Class 3	N/A	2506.00	39750	Low	LTE Band 41	20	17.3	17.21	-0.12	0	Ant 4A	DLX0702RKYD1	QPSK	50	50	0 mm	left	1:1.58	0.518	1.021	0.529	0.188	0.192	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT										Body														
Spatial Peak										1.6 W/kg (mW/g)														
Uncontrolled Exposure/General Population										averaged over 1 gram														

FCC ID: BCGA2014	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 153 of 195

Table 10-47
LTE Band 41 Body SAR – Ant 4B

MEASUREMENT RESULTS																								
1 CC Uplink 2 CC Uplink	Component Carrier	FREQUENCY			Mode	Bandwidth (MHz)	Maximum Allowed Power (dBm)	Conducted Power (dBm)	Power Drift (dB)	MPR (dB)	Antenna Config.	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #
		MHz		Ch.															(W/kg)		(W/kg)	(W/kg)		
1 CC Uplink - Power Class 3	N/A	2506.00	39750	Low	LTE Band 41	20	16.2	16.20	0.04	0	Ant 4B	DLX0702RKYD1	QPSK	1	0	0 mm	back	1:15.8	1.030	1.000	1.030	0.411	0.411	
1 CC Uplink - Power Class 3	N/A	2549.50	40185	Low-Mid	LTE Band 41	20	16.2	15.84	0.16	0	Ant 4B	DLX0702RKYD1	QPSK	1	0	0 mm	back	1:15.8	1.090	1.086	1.184	0.454	0.493	
1 CC Uplink - Power Class 3	N/A	2593.00	40620	Mid	LTE Band 41	20	16.2	15.74	0.13	0	Ant 4B	DLX0702RKYD1	QPSK	1	0	0 mm	back	1:15.8	1.020	1.112	1.134	0.399	0.444	
1 CC Uplink - Power Class 3	N/A	2636.50	41055	Mid-High	LTE Band 41	20	16.2	15.72	0.17	0	Ant 4B	DLX0702RKYD1	QPSK	1	0	0 mm	back	1:15.8	1.060	1.117	1.184	0.416	0.465	
1 CC Uplink - Power Class 2	N/A	2549.50	40185	Low-Mid	LTE Band 41	20	16.2	15.84	0.06	0	Ant 4B	DLX0702RKYD1	QPSK	1	0	0 mm	back	12:31	0.781	1.086	0.848	0.316	0.343	
2 CC Uplink - Power Class 3	PCC	2549.50	40185	Low-Mid	LTE Band 41	20	16.2	15.54	-0.06	0	Ant 4B	DLX0702RKYD1	QPSK	1	0	0 mm	back	1:15.8	1.010	1.164	1.176	0.388	0.452	
2 CC Uplink - Power Class 3	SCC	2529.70	39987	Low-Mid									QPSK	1	99									
1 CC Uplink - Power Class 3	N/A	2680.00	41490	High	LTE Band 41	20	16.2	15.66	0.03	0	Ant 4B	DLX0702RKYD1	QPSK	1	99	0 mm	back	1:15.8	0.891	1.132	1.009	0.348	0.394	
1 CC Uplink - Power Class 3	N/A	2506.00	39750	Low	LTE Band 41	20	16.2	16.19	0.12	0	Ant 4B	DLX0702RKYD1	QPSK	50	25	0 mm	back	1:15.8	1.080	1.002	1.082	0.443	0.444	
1 CC Uplink - Power Class 3	N/A	2549.50	40185	Low-Mid	LTE Band 41	20	16.2	15.81	0.00	0	Ant 4B	DLX0702RKYD1	QPSK	50	25	0 mm	back	1:15.8	0.829	1.094	0.907	0.344	0.376	
1 CC Uplink - Power Class 3	N/A	2593.00	40620	Mid	LTE Band 41	20	16.2	15.69	-0.10	0	Ant 4B	DLX0702RKYD1	QPSK	50	25	0 mm	back	1:15.8	0.984	1.125	1.107	0.405	0.456	
1 CC Uplink - Power Class 3	N/A	2636.50	41055	Mid-High	LTE Band 41	20	16.2	15.53	0.14	0	Ant 4B	DLX0702RKYD1	QPSK	50	0	0 mm	back	1:15.8	0.866	1.167	1.011	0.345	0.404	
1 CC Uplink - Power Class 3	N/A	2680.00	41490	High	LTE Band 41	20	16.2	15.65	0.02	0	Ant 4B	DLX0702RKYD1	QPSK	50	0	0 mm	back	1:15.8	0.863	1.135	0.980	0.337	0.382	
1 CC Uplink - Power Class 3	N/A	2506.00	39750	Low	LTE Band 41	20	16.2	16.18	0.03	0	Ant 4B	DLX0702RKYD1	QPSK	100	0	0 mm	back	1:15.8	0.896	1.005	0.900	0.334	0.336	
1 CC Uplink - Power Class 3	N/A	2506.00	39750	Low	LTE Band 41	20	16.2	16.20	0.01	0	Ant 4B	DLX0702RKYD1	QPSK	1	0	0 mm	top	1:15.8	1.140	1.000	1.140	0.401	0.401	
1 CC Uplink - Power Class 3	N/A	2549.50	40185	Low-Mid	LTE Band 41	20	16.2	15.84	0.01	0	Ant 4B	DLX0702RKYD1	QPSK	1	0	0 mm	top	1:15.8	1.030	1.086	1.119	0.362	0.393	
1 CC Uplink - Power Class 3	N/A	2593.00	40620	Mid	LTE Band 41	20	16.2	15.74	0.17	0	Ant 4B	DLX0702RKYD1	QPSK	1	0	0 mm	top	1:15.8	0.823	1.112	0.915	0.282	0.314	
1 CC Uplink - Power Class 3	N/A	2636.50	41055	Mid-High	LTE Band 41	20	16.2	15.72	-0.13	0	Ant 4B	DLX0702RKYD1	QPSK	1	0	0 mm	top	1:15.8	0.610	1.117	0.681	0.215	0.240	
1 CC Uplink - Power Class 3	N/A	2680.00	41490	High	LTE Band 41	20	16.2	15.66	-0.12	0	Ant 4B	DLX0702RKYD1	QPSK	1	99	0 mm	top	1:15.8	0.698	1.132	0.790	0.210	0.238	
1 CC Uplink - Power Class 3	N/A	2506.00	39750	Low	LTE Band 41	20	16.2	16.19	0.04	0	Ant 4B	DLX0702RKYD1	QPSK	50	25	0 mm	top	1:15.8	1.120	1.002	1.122	0.389	0.390	
1 CC Uplink - Power Class 3	N/A	2549.50	40185	Low-Mid	LTE Band 41	20	16.2	15.81	-0.01	0	Ant 4B	DLX0702RKYD1	QPSK	50	25	0 mm	top	1:15.8	0.969	1.094	1.060	0.338	0.370	
1 CC Uplink - Power Class 3	N/A	2593.00	40620	Mid	LTE Band 41	20	16.2	15.69	-0.01	0	Ant 4B	DLX0702RKYD1	QPSK	50	25	0 mm	top	1:15.8	0.783	1.125	0.881	0.276	0.311	
1 CC Uplink - Power Class 3	N/A	2636.50	41055	Mid-High	LTE Band 41	20	16.2	15.53	-0.16	0	Ant 4B	DLX0702RKYD1	QPSK	50	0	0 mm	top	1:15.8	0.619	1.167	0.722	0.208	0.243	
1 CC Uplink - Power Class 3	N/A	2680.00	41490	High	LTE Band 41	20	16.2	15.65	0.07	0	Ant 4B	DLX0702RKYD1	QPSK	50	0	0 mm	top	1:15.8	0.527	1.135	0.598	0.180	0.204	
1 CC Uplink - Power Class 3	N/A	2506.00	39750	Low	LTE Band 41	20	16.2	16.18	0.01	0	Ant 4B	DLX0702RKYD1	QPSK	100	0	0 mm	top	1:15.8	1.130	1.005	1.136	0.395	0.397	
1 CC Uplink - Power Class 3	N/A	2506.00	39750	Low	LTE Band 41	20	16.2	16.20	0.08	0	Ant 4B	DLX0702RKYD1	QPSK	1	0	0 mm	right	1:15.8	0.049	1.000	0.049	0.022	0.022	
1 CC Uplink - Power Class 3	N/A	2506.00	39750	Low	LTE Band 41	20	16.2	16.19	0.02	0	Ant 4B	DLX0702RKYD1	QPSK	50	25	0 mm	right	1:15.8	0.065	1.002	0.065	0.024	0.024	
1 CC Uplink - Power Class 3	N/A	2506.00	39750	Low	LTE Band 41	20	16.2	16.20	0.00	0	Ant 4B	DLX0702RKYD1	QPSK	1	0	0 mm	left	1:15.8	0.077	1.000	0.077	0.033	0.033	
1 CC Uplink - Power Class 3	N/A	2506.00	39750	Low	LTE Band 41	20	16.2	16.19	0.13	0	Ant 4B	DLX0702RKYD1	QPSK	50	25	0 mm	left	1:15.8	0.077	1.002	0.077	0.033	0.033	
ANSI / IEEE C63.1 1992 - SAFETY LIMIT										Body														
Spatial Peak										1.6 W/kg (mW/g)														
Uncontrolled Exposure/General Population										averaged over 1 gram														

FCC ID: BCGA2014		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 154 of 195

Table 10-48
LTE Band 41 Body SAR – Ant 2A

MEASUREMENT RESULTS																								
1 CC Uplink / 2 CC Uplink	Component Carrier	FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Antenna Config.	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #	
		MHz	Ch.															(W/kg)		(W/kg)	(W/kg)	(W/kg)		
1 CC Uplink - Power Class 3	N/A	2506.00	39750	Low	LTE Band 41	20	17.5	17.49	0.12	0	Ant 2A	DLXX702RKYD1	QPSK	1	0	0 mm	back	1:1.58	1.010	1.002	1.012	0.448	0.449	
1 CC Uplink - Power Class 3	N/A	2549.50	40185	Low-Mid	LTE Band 41	20	17.5	17.32	-0.01	0	Ant 2A	DLXX702RKYD1	QPSK	1	0	0 mm	back	1:1.58	1.130	1.042	1.177	0.474	0.484	
1 CC Uplink - Power Class 2	N/A	2549.50	40185	Low-Mid	LTE Band 41	20	17.5	17.27	-0.03	0	Ant 2A	DLXX702RKYD1	QPSK	1	0	0 mm	back	1:2.31	0.757	1.054	0.798	0.317	0.334	
2 CC Uplink - Power Class 3	PCC	2549.50	40185	Low-Mid	LTE Band 41	20	17.5	17.12	-0.17	0	Ant 2A	DLXX702RKYD1	QPSK	1	0	0 mm	back	1:1.58	1.060	1.091	1.156	0.462	0.504	
2 CC Uplink - Power Class 3	SCC	2529.70	39987	Low-Mid									QPSK	1	99									
1 CC Uplink - Power Class 3	N/A	2593.00	40620	Mid	LTE Band 41	20	17.5	17.41	-0.03	0	Ant 2A	DLXX702RKYD1	QPSK	1	99	0 mm	back	1:1.58	1.060	1.021	1.082	0.437	0.446	
1 CC Uplink - Power Class 3	N/A	2636.50	41055	Mid-High	LTE Band 41	20	17.5	17.50	0.12	0	Ant 2A	DLXX702RKYD1	QPSK	1	0	0 mm	back	1:1.58	0.926	1.000	0.926	0.374	0.374	
1 CC Uplink - Power Class 3	N/A	2680.00	41490	High	LTE Band 41	20	17.5	17.37	-0.15	0	Ant 2A	DLXX702RKYD1	QPSK	1	0	0 mm	back	1:1.58	0.708	1.030	0.729	0.280	0.288	
1 CC Uplink - Power Class 3	N/A	2506.00	39750	Low	LTE Band 41	20	17.5	17.37	0.13	0	Ant 2A	DLXX702RKYD1	QPSK	50	0	0 mm	back	1:1.58	1.120	1.030	1.154	0.467	0.481	
1 CC Uplink - Power Class 3	N/A	2549.50	40185	Low-Mid	LTE Band 41	20	17.5	17.19	0.12	0	Ant 2A	DLXX702RKYD1	QPSK	50	0	0 mm	back	1:1.58	1.040	1.074	1.117	0.442	0.475	
1 CC Uplink - Power Class 3	N/A	2593.00	40620	Mid	LTE Band 41	20	17.5	17.33	-0.03	0	Ant 2A	DLXX702RKYD1	QPSK	50	50	0 mm	back	1:1.58	1.110	1.040	1.154	0.456	0.474	
1 CC Uplink - Power Class 3	N/A	2636.50	41055	Mid-High	LTE Band 41	20	17.5	17.43	-0.13	0	Ant 2A	DLXX702RKYD1	QPSK	50	0	0 mm	back	1:1.58	0.913	1.016	0.928	0.368	0.374	
1 CC Uplink - Power Class 3	N/A	2680.00	41490	High	LTE Band 41	20	17.5	17.33	-0.14	0	Ant 2A	DLXX702RKYD1	QPSK	50	0	0 mm	back	1:1.58	0.725	1.040	0.754	0.284	0.295	
1 CC Uplink - Power Class 3	N/A	2636.50	41055	Mid-High	LTE Band 41	20	17.5	17.38	0.16	0	Ant 2A	DLXX702RKYD1	QPSK	100	0	0 mm	back	1:1.58	0.893	1.028	0.918	0.356	0.366	
1 CC Uplink - Power Class 3	N/A	2506.00	39750	Low	LTE Band 41	20	17.5	17.49	0.12	0	Ant 2A	DLXX702RKYD1	QPSK	1	0	0 mm	bottom	1:1.58	0.643	1.002	0.644	0.200	0.200	
1 CC Uplink - Power Class 3	N/A	2549.50	40185	Low-Mid	LTE Band 41	20	17.5	17.32	0.04	0	Ant 2A	DLXX702RKYD1	QPSK	1	0	0 mm	bottom	1:1.58	0.725	1.042	0.755	0.221	0.230	
1 CC Uplink - Power Class 3	N/A	2593.00	40620	Mid	LTE Band 41	20	17.5	17.41	0.05	0	Ant 2A	DLXX702RKYD1	QPSK	1	99	0 mm	bottom	1:1.58	0.706	1.021	0.721	0.208	0.212	
1 CC Uplink - Power Class 3	N/A	2636.50	41055	Mid-High	LTE Band 41	20	17.5	17.50	0.01	0	Ant 2A	DLXX702RKYD1	QPSK	1	0	0 mm	bottom	1:1.58	0.609	1.000	0.609	0.177	0.177	
1 CC Uplink - Power Class 3	N/A	2680.00	41490	High	LTE Band 41	20	17.5	17.37	0.04	0	Ant 2A	DLXX702RKYD1	QPSK	1	0	0 mm	bottom	1:1.58	0.445	1.030	0.458	0.126	0.130	
1 CC Uplink - Power Class 3	N/A	2636.50	41055	Mid-High	LTE Band 41	20	17.5	17.43	0.01	0	Ant 2A	DLXX702RKYD1	QPSK	50	0	0 mm	bottom	1:1.58	0.578	1.016	0.587	0.168	0.171	
1 CC Uplink - Power Class 3	N/A	2636.50	41055	Mid-High	LTE Band 41	20	17.5	17.38	0.00	0	Ant 2A	DLXX702RKYD1	QPSK	100	0	0 mm	bottom	1:1.58	0.559	1.028	0.575	0.161	0.166	
1 CC Uplink - Power Class 3	N/A	2636.50	41055	Mid-High	LTE Band 41	20	17.5	17.50	-0.12	0	Ant 2A	DLXX702RKYD1	QPSK	1	0	0 mm	right	1:1.58	0.357	1.000	0.357	0.127	0.127	
1 CC Uplink - Power Class 3	N/A	2636.50	41055	Mid-High	LTE Band 41	20	17.5	17.43	-0.08	0	Ant 2A	DLXX702RKYD1	QPSK	50	0	0 mm	right	1:1.58	0.342	1.016	0.347	0.122	0.124	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT												Body												
Spatial Peak												1.6 W/kg (mW/g)												
Uncontrolled Exposure/General Population												averaged over 1 gram												

Table 10-49
LTE Band 41 Body SAR – Ant 2B

MEASUREMENT RESULTS																								
1 CC Uplink 2 CC Uplink	Component Carrier	FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Antenna Config.	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #	
		MHz	Ch.															(W/kg)		(W/kg)	(W/kg)			
1 CC Uplink - Power Class 3	N/A	2506.00	39750	Low	LTE Band 41	20	15.6	15.58	0.12	0	Ant 2B	DLXX702RKYD1	QPSK	1	99	0 mm	back	1:1.58	1.180	1.005	1.186	0.437	0.439	A17
1 CC Uplink - Power Class 2	N/A	2506.00	39750	Low	LTE Band 41	20	15.6	15.60	0.05	0	Ant 2B	DLXX702RKYD1	QPSK	1	99	0 mm	back	1:2.31	0.733	1.000	0.733	0.286	0.286	
2 CC Uplink - Power Class 3	PCC	2506.00	39750	Low	LTE Band 41	20	15.6	15.39	-0.01	0	Ant 2B	DLXX702RKYD1	QPSK	1	99	0 mm	back	1:1.58	1.080	1.050	1.134	0.414	0.435	
2 CC Uplink - Power Class 3	SCC	2525.80	39948	Low									QPSK	1	0									
1 CC Uplink - Power Class 3	N/A	2549.50	40185	Low-Mid	LTE Band 41	20	15.6	15.41	0.01	0	Ant 2B	DLXX702RKYD1	QPSK	1	99	0 mm	back	1:1.58	0.866	1.045	0.905	0.315	0.329	
1 CC Uplink - Power Class 3	N/A	2593.00	40620	Mid	LTE Band 41	20	15.6	15.38	0.12	0	Ant 2B	DLXX702RKYD1	QPSK	1	99	0 mm	back	1:1.58	0.958	1.052	1.008	0.377	0.397	
1 CC Uplink - Power Class 3	N/A	2636.50	41055	Mid-High	LTE Band 41	20	15.6	15.34	-0.01	0	Ant 2B	DLXX702RKYD1	QPSK	1	0	0 mm	back	1:1.58	0.985	1.062	1.057	0.382	0.406	
1 CC Uplink - Power Class 3	N/A	2680.00	41490	High	LTE Band 41	20	15.6	15.16	0.16	0	Ant 2B	DLXX702RKYD1	QPSK	1	99	0 mm	back	1:1.58	0.987	1.107	1.093	0.368	0.407	
1 CC Uplink - Power Class 3	N/A	2506.00	39750	Low	LTE Band 41	20	15.6	15.48	-0.17	0	Ant 2B	DLXX702RKYD1	QPSK	50	50	0 mm	back	1:1.58	0.809	1.028	0.832	0.302	0.310	
1 CC Uplink - Power Class 3	N/A	2549.50	40185	Low-Mid	LTE Band 41	20	15.6	15.26	-0.15	0	Ant 2B	DLXX702RKYD1	QPSK	50	50	0 mm	back	1:1.58	1.090	1.081	1.178	0.370	0.400	
1 CC Uplink - Power Class 3	N/A	2593.00	40620	Mid	LTE Band 41	20	15.6	15.39	0.14	0	Ant 2B	DLXX702RKYD1	QPSK	50	50	0 mm	back	1:1.58	0.952	1.050	1.000	0.353	0.371	
1 CC Uplink - Power Class 3	N/A	2636.50	41055	Mid-High	LTE Band 41	20	15.6	15.30	0.01	0	Ant 2B	DLXX702RKYD1	QPSK	50	25	0 mm	back	1:1.58	0.991	1.072	1.062	0.377	0.404	
1 CC Uplink - Power Class 3	N/A	2680.00	41490	High	LTE Band 41	20	15.6	15.14	-0.19	0	Ant 2B	DLXX702RKYD1	QPSK	50	50	0 mm	back	1:1.58	0.790	1.112	0.878	0.312	0.347	
1 CC Uplink - Power Class 3	N/A	2506.00	39750	Low	LTE Band 41	20	15.6	15.43	0.03	0	Ant 2B	DLXX702RKYD1	QPSK	100	0	0 mm	back	1:1.58	1.010	1.040	1.050	0.378	0.393	
1 CC Uplink - Power Class 3	N/A	2506.00	39750	Low	LTE Band 41	20	15.6	15.58	0.21	0	Ant 2B	DLXX702RKYD1	QPSK	1	99	0 mm	bottom	1:1.58	0.755	1.005	0.759	0.274	0.275	
1 CC Uplink - Power Class 3	N/A	2549.50	40185	Low-Mid	LTE Band 41	20	15.6	15.41	0.13	0	Ant 2B	DLXX702RKYD1	QPSK	1	99	0 mm	bottom	1:1.58	0.645	1.045	0.674	0.211	0.220	
1 CC Uplink - Power Class 3	N/A	2593.00	40620	Mid	LTE Band 41	20	15.6	15.38	0.02	0	Ant 2B	DLXX702RKYD1	QPSK	1	99	0 mm	bottom	1:1.58	0.800	1.052	0.842	0.263	0.280	
1 CC Uplink - Power Class 3	N/A	2636.50	41055	Mid-High	LTE Band 41	20	15.6	15.34	0.08	0	Ant 2B	DLXX702RKYD1	QPSK	1	0	0 mm	bottom	1:1.58	0.745	1.062	0.791	0.276	0.279	
1 CC Uplink - Power Class 3	N/A	2680.00	41490	High	LTE Band 41	20	15.6	15.16	0.00	0	Ant 2B	DLXX702RKYD1	QPSK	1	99	0 mm	bottom	1:1.58	0.764	1.107	0.846	0.257	0.284	
1 CC Uplink - Power Class 3	N/A	2506.00	39750	Low	LTE Band 41	20	15.6	15.48	0.05	0	Ant 2B	DLXX702RKYD1	QPSK	50	50	0 mm	bottom	1:1.58	0.784	1.028	0.806	0.274	0.282	
1 CC Uplink - Power Class 3	N/A	2549.50	40185	Low-Mid	LTE Band 41	20	15.6	15.26	-0.05	0	Ant 2B	DLXX702RKYD1	QPSK	50	50	0 mm	bottom	1:1.58	0.791	1.081	0.855	0.275	0.297	
1 CC Uplink - Power Class 3	N/A	2593.00	40620	Mid	LTE Band 41	20	15.6	15.39	-0.01	0	Ant 2B	DLXX702RKYD1	QPSK	50	50	0 mm	bottom	1:1.58	0.775	1.050	0.814	0.271	0.285	
1 CC Uplink - Power Class 3	N/A	2636.50	41055	Mid-High	LTE Band 41	20	15.6	15.30	0.00	0	Ant 2B	DLXX702RKYD1	QPSK	50	25	0 mm	bottom	1:1.58	0.640	1.072	0.686	0.209	0.224	
1 CC Uplink - Power Class 3	N/A	2680.00	41490	High	LTE Band 41	20	15.6	15.14	0.00	0	Ant 2B	DLXX702RKYD1	QPSK	50	50	0 mm	bottom	1:1.58	0.683	1.112	0.759	0.224	0.249	
1 CC Uplink - Power Class 3	N/A	2506.00	39750	Low	LTE Band 41	20	15.6	15.43	0.01	0	Ant 2B	DLXX702RKYD1	QPSK	100	0	0 mm	bottom	1:1.58	0.773	1.040	0.804	0.274	0.285	
1 CC Uplink - Power Class 3	N/A	2506.00	39750	Low	LTE Band 41	20	15.6	15.58	-0.15	0	Ant 2B	DLXX702RKYD1	QPSK	1	99	0 mm	right	1:1.58	0.042	1.005	0.042	0.018	0.018	
1 CC Uplink - Power Class 3	N/A	2506.00	39750	Low	LTE Band 41	20	15.6	15.48	0.12	0	Ant 2B	DLXX702RKYD1	QPSK	50	50	0 mm	right	1:1.58	0.041	1.028	0.042	0.018	0.019	
1 CC Uplink - Power Class 3	N/A	2506.00	39750	Low	LTE Band 41	20	15.6	15.58	-0.02	0	Ant 2B	DLXX702RKYD1	QPSK	1	99	0 mm	back	1:1.58	1.100	1.005	1.106	0.422	0.424	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT										Body 1.6 W/kg (mW/g) averaged over 1 gram														
Spatial Peak Uncorrelated Exposure/General Population																								

Table 10-50
2.4GHz WLAN Body SAR- Ant 4A

MEASUREMENT RESULTS																					
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Variant	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #
MHz	Ch.														(W/kg)			(W/kg)	(W/kg)		
2412	1	802.11b	DSSS	22	13.75	13.60	-0.13	0 mm	Ant 4A	V1	DLX503LKNQK	1	back	100.0	1.100	1.035	1.000	1.139	0.507	0.525	
2412	1	802.11b	DSSS	22	13.75	13.70	-0.13	0 mm	Ant 4A	V2	DLX5038KYD1	1	back	100.0	0.922	1.012	1.000	0.933	0.418	0.423	
2437	6	802.11b	DSSS	22	13.75	13.70	-0.07	0 mm	Ant 4A	V1	DLX503LKNQK	1	back	100.0	0.938	1.012	1.000	0.949	0.441	0.446	
2462	11	802.11b	DSSS	22	13.75	13.65	-0.14	0 mm	Ant 4A	V1	DLX503LKNQK	1	back	100.0	1.110	1.023	1.000	1.136	0.497	0.508	
2437	6	802.11b	DSSS	22	13.75	13.70	-0.10	0 mm	Ant 4A	V1	DLX503LKNQK	1	top	100.0	0.567	1.012	1.000	0.574	0.173	0.175	
2437	6	802.11b	DSSS	22	13.75	13.70	-0.10	0 mm	Ant 4A	V1	DLX503LKNQK	1	bottom	100.0	0.035	1.012	1.000	0.035	0.015	0.015	
2437	6	802.11b	DSSS	22	13.75	13.70	-0.21	0 mm	Ant 4A	V1	DLX503LKNQK	1	left	100.0	0.668	1.012	1.000	0.676	0.241	0.244	
2412	1	802.11b	DSSS	22	6.75	6.74	-0.12	0 mm	Ant 4A	V1	DLX502DKYD1	1	back	100.0	0.195	1.002	1.000	0.195	0.084	0.084	
2412	1	802.11b	DSSS	22	6.75	6.74	0.10	0 mm	Ant 4A	V1	DLX502DKYD1	1	top	100.0	0.091	1.002	1.000	0.091	0.027	0.027	
2412	1	802.11b	DSSS	22	6.75	6.74	0.09	0 mm	Ant 4A	V1	DLX502DKYD1	1	left	100.0	0.128	1.002	1.000	0.128	0.045	0.045	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Body													
Spatial Peak								1.6 W/kg (mW/g)													
Uncontrolled Exposure/General Population								averaged over 1 gram													

Table 10-51
2.4GHz WLAN Body SAR- Ant 2A

MEASUREMENT RESULTS																					
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Variant	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #
MHz	Ch.														(W/kg)			(W/kg)		(W/kg)	
2412	1	802.11b	DSSS	22	14.25	14.23	-0.15	0 mm	Ant 2A	V1	DLX502KKYD1	1	back	100.0	1.150	1.005	1.000	1.156	0.509	0.512	A18
2412	1	802.11b	DSSS	22	14.25	14.25	-0.13	0 mm	Ant 2A	V2	DLX5038KYD1	1	back	100.0	1.030	1.000	1.000	1.030	0.460	0.460	
2437	6	802.11b	DSSS	22	14.25	14.24	-0.15	0 mm	Ant 2A	V1	DLX502KKYD1	1	back	100.0	1.110	1.002	1.000	1.112	0.490	0.491	
2462	11	802.11b	DSSS	22	14.25	14.25	-0.13	0 mm	Ant 2A	V1	DLX502KKYD1	1	back	100.0	1.040	1.000	1.000	1.040	0.462	0.462	
2462	11	802.11b	DSSS	22	14.25	14.25	-0.03	0 mm	Ant 2A	V1	DLX502KKYD1	1	top	100.0	0.024	1.000	1.000	0.024	0.011	0.011	
2462	11	802.11b	DSSS	22	14.25	14.25	-0.03	0 mm	Ant 2A	V1	DLX502KKYD1	1	bottom	100.0	0.624	1.000	1.000	0.624	0.191	0.191	
2462	11	802.11b	DSSS	22	14.25	14.25	-0.14	0 mm	Ant 2A	V1	DLX502KKYD1	1	right	100.0	0.777	1.000	1.000	0.777	0.277	0.277	
2412	1	802.11b	DSSS	22	7.25	7.25	-0.09	0 mm	Ant 2A	V1	DLX502DKYD1	1	back	100.0	0.220	1.000	1.000	0.220	0.098	0.098	
2412	1	802.11b	DSSS	22	7.25	7.25	0.14	0 mm	Ant 2A	V1	DLX502DKYD1	1	bottom	100.0	0.107	1.000	1.000	0.107	0.031	0.031	
2412	1	802.11b	DSSS	22	7.25	7.25	0.19	0 mm	Ant 2A	V1	DLX502DKYD1	1	right	100.0	0.133	1.000	1.000	0.133	0.046	0.046	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Body													
Spatial Peak								1.6 W/kg (mW/g)													
Uncontrolled Exposure/General Population								averaged over 1 gram													

Table 10-52
2.4GHz WLAN Body SAR- Ant 5

MEASUREMENT RESULTS																					
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Variant	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #
MHz	Ch.														(W/kg)			(W/kg)		(W/kg)	
2437	6	802.11b	DSSS	22	19.0	19.00	0.13	0 mm	Ant 5	V1	DLX502KKYD1	1	back	100.0	0.015	1.000	1.000	0.015	0.005	0.005	
2437	6	802.11b	DSSS	22	19.0	19.00	0.00	0 mm	Ant 5	V1	DLX502KKYD1	1	top	100.0	0.000	1.000	1.000	0.000	0.000	0.000	
2437	6	802.11b	DSSS	22	19.0	19.00	0.00	0 mm	Ant 5	V1	DLX502KKYD1	1	bottom	100.0	0.000	1.000	1.000	0.000	0.000	0.000	
2437	6	802.11b	DSSS	22	19.0	19.00	0.09	0 mm	Ant 5	V1	DLX502KKYD1	1	right	100.0	0.331	1.000	1.000	0.331	0.116	0.116	
2437	6	802.11b	DSSS	22	19.0	18.98	-0.18	0 mm	Ant 5	V2	DLX5038KYD1	1	right	100.0	0.290	1.005	1.000	0.291	0.103	0.104	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Body													
Spatial Peak								1.6 W/kg (mW/g)													
Uncontrolled Exposure/General Population								averaged over 1 gram													

FCC ID: BCGA2014		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device		Page 156 of 195

Table 10-53
5GHz WLAN Body SAR- Ant 5

MEASUREMENT RESULTS																					
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Variant	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #
MHz	Ch.														(W/kg)			(W/kg)			
5270	54	802.11n	OFDM	40	16.75	16.74	-0.12	0 mm	Ant 5	V1	DLX502KKYD1	13.5	back	97.3	0.076	1.002	1.028	0.078	0.028	0.029	
5270	54	802.11n	OFDM	40	16.75	16.74	0.00	0 mm	Ant 5	V1	DLX502KKYD1	13.5	top	97.3	0.000	1.002	1.028	0.000	0.000	0.000	
5270	54	802.11n	OFDM	40	16.75	16.74	0.00	0 mm	Ant 5	V1	DLX502KKYD1	13.5	bottom	97.3	0.000	1.002	1.028	0.000	0.000	0.000	
5270	54	802.11n	OFDM	40	16.75	16.74	-0.12	0 mm	Ant 5	V1	DLX502KKYD1	13.5	right	97.3	0.988	1.002	1.028	1.018	0.274	0.282	
5270	54	802.11n	OFDM	40	16.75	16.74	0.03	0 mm	Ant 5	V2	DLX5038KYD1	13.5	right	97.3	0.943	1.002	1.028	0.971	0.261	0.269	
5310	62	802.11n	OFDM	40	14.50	14.47	-0.19	0 mm	Ant 5	V1	DLX502KKYD1	13.5	right	97.3	0.756	1.007	1.028	0.783	0.190	0.197	
5270	54	802.11n	OFDM	40	16.75	16.74	-0.19	0 mm	Ant 5	V1	DLX502KKYD1	13.5	left	97.3	0.007	1.002	1.028	0.007	0.002	0.002	
5290	58	802.11ac	OFDM	80	9.75	9.70	0.00	0 mm	Ant 5	V1	DLX502KKYD1	29.3	back	95.0	0.001	1.012	1.053	0.001	0.000	0.000	
5290	58	802.11ac	OFDM	80	9.75	9.70	-0.05	0 mm	Ant 5	V1	DLX502KKYD1	29.3	right	95.0	0.152	1.012	1.053	0.162	0.038	0.040	
5690	138	802.11ac	OFDM	80	16.00	16.00	0.10	0 mm	Ant 5	V1	DLX502KKYD1	29.3	back	95.0	0.081	1.000	1.053	0.085	0.031	0.033	
5690	138	802.11ac	OFDM	80	16.00	16.00	0.10	0 mm	Ant 5	V1	DLX502KKYD1	29.3	top	95.0	0.000	1.000	1.053	0.000	0.000	0.000	
5690	138	802.11ac	OFDM	80	16.00	16.00	0.00	0 mm	Ant 5	V1	DLX502KKYD1	29.3	bottom	95.0	0.000	1.000	1.053	0.000	0.000	0.000	
5530	106	802.11ac	OFDM	80	13.00	12.98	0.14	0 mm	Ant 5	V1	DLX502KKYD1	29.3	right	95.0	0.594	1.005	1.053	0.629	0.173	0.183	
5610	122	802.11ac	OFDM	80	16.00	15.95	-0.12	0 mm	Ant 5	V1	DLX502KKYD1	29.3	right	95.0	1.080	1.012	1.053	1.151	0.329	0.351	
5610	122	802.11ac	OFDM	80	16.00	16.00	-0.12	0 mm	Ant 5	V2	DLX5038KYD1	29.3	right	95.0	1.070	1.000	1.053	1.127	0.320	0.337	
5690	138	802.11ac	OFDM	80	16.00	16.00	-0.04	0 mm	Ant 5	V1	DLX502KKYD1	29.3	right	95.0	0.964	1.000	1.053	1.015	0.304	0.320	
5690	138	802.11ac	OFDM	80	16.00	16.00	-0.19	0 mm	Ant 5	V1	DLX502KKYD1	29.3	left	95.0	0.000	1.000	1.053	0.000	0.000	0.000	
5530	106	802.11ac	OFDM	80	9.00	9.00	-0.16	0 mm	Ant 5	V1	DLX502KKYD1	29.3	back	95.0	0.013	1.000	1.053	0.014	0.004	0.004	
5530	106	802.11ac	OFDM	80	9.00	9.00	0.03	0 mm	Ant 5	V1	DLX502KKYD1	29.3	right	95.0	0.150	1.000	1.053	0.158	0.045	0.047	
5775	155	802.11ac	OFDM	80	16.00	16.00	0.14	0 mm	Ant 5	V1	DLX502KKYD1	29.3	back	95.0	0.081	1.000	1.053	0.085	0.032	0.034	
5775	155	802.11ac	OFDM	80	16.00	16.00	0.14	0 mm	Ant 5	V1	DLX502KKYD1	29.3	top	95.0	0.000	1.000	1.053	0.000	0.000	0.000	
5775	155	802.11ac	OFDM	80	16.00	16.00	0.00	0 mm	Ant 5	V1	DLX502KKYD1	29.3	bottom	95.0	0.000	1.000	1.053	0.000	0.000	0.000	
5775	155	802.11ac	OFDM	80	16.00	16.00	-0.17	0 mm	Ant 5	V1	DLX502KKYD1	29.3	right	95.0	1.040	1.000	1.053	1.095	0.330	0.347	
5775	155	802.11ac	OFDM	80	16.00	15.98	-0.14	0 mm	Ant 5	V2	DLX5038KYD1	29.3	right	95.0	0.974	1.005	1.053	1.031	0.298	0.315	
5775	155	802.11ac	OFDM	80	16.00	16.00	0.00	0 mm	Ant 5	V1	DLX502KKYD1	29.3	left	95.0	0.000	1.000	1.053	0.000	0.000	0.000	
5775	155	802.11ac	OFDM	80	9.00	9.00	0.18	0 mm	Ant 5	V1	DLX502KKYD1	29.3	back	95.0	0.015	1.000	1.053	0.016	0.005	0.005	
5775	155	802.11ac	OFDM	80	9.00	9.00	-0.18	0 mm	Ant 5	V1	DLX502KKYD1	29.3	right	95.0	0.168	1.000	1.053	0.177	0.051	0.054	
5270	54	802.11n	OFDM	40	16.75	16.74	0.08	0 mm	Ant 5	V1	DLX502KKYD1	13.5	right	97.3	0.944	1.002	1.028	0.972	0.263	0.271	
5610	122	802.11ac	OFDM	80	16.00	15.95	-0.13	0 mm	Ant 5	V1	DLX502KKYD1	29.3	right	95.0	1.070	1.012	1.053	1.140	0.323	0.344	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Body													
Spatial Peak								1.6 W/kg (mW/g)													
Uncontrolled Exposure/General Population								averaged over 1 gram													

Note: Blue entry represents variability measurement.

FCC ID: BCGA2014		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 157 of 195

Table 10-54
5 GHz WLAN Body SAR – Ant 6

MEASUREMENT RESULTS																					
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Variant	Device Serial Number	Data Rate [Mbps]	Side	Duty Cycle (%)	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #
MHz	Ch.														(W/kg)			(W/kg)	(W/kg)		
5230	46	802.11n	OFDM	40	17.5	17.46	0.19	0 mm	Ant 6	V2	DLX5038KYD1	13.5	back	97.1	0.067	1.009	1.030	0.070	0.024	0.025	
5230	46	802.11n	OFDM	40	17.5	17.46	-0.19	0 mm	Ant 6	V2	DLX5038KYD1	13.5	top	97.1	0.006	1.009	1.030	0.006	0.001	0.001	
5190	38	802.11n	OFDM	40	14.0	13.90	-0.13	0 mm	Ant 6	V2	DLX5038KYD1	13.5	right	97.1	0.256	1.023	1.030	0.270	0.062	0.065	
5230	46	802.11n	OFDM	40	17.5	17.46	0.21	0 mm	Ant 6	V2	DLX5038KYD1	13.5	right	97.1	0.809	1.009	1.030	0.841	0.210	0.218	
5230	46	802.11n	OFDM	40	17.5	17.50	-0.12	0 mm	Ant 6	V1	DLX502KKYD1	13.5	right	97.1	0.808	1.000	1.030	0.832	0.215	0.221	
5230	46	802.11n	OFDM	40	17.5	17.46	0.00	0 mm	Ant 6	V2	DLX5038KYD1	13.5	left	97.1	0.000	1.009	1.030	0.000	0.000	0.000	
5210	42	802.11ac	OFDM	80	12.5	12.47	-0.12	0 mm	Ant 6	V2	DLX5038KYD1	29.3	back	94.2	0.013	1.007	1.062	0.014	0.004	0.004	
5210	42	802.11ac	OFDM	80	12.5	12.47	0.03	0 mm	Ant 6	V2	DLX5038KYD1	29.3	right	94.2	0.205	1.007	1.062	0.219	0.049	0.052	
5690	138	802.11ac	OFDM	80	16.25	16.25	-0.14	0 mm	Ant 6	V1	DLX502KKYD1	29.3	back	94.2	0.069	1.000	1.062	0.073	0.026	0.028	
5690	138	802.11ac	OFDM	80	16.25	16.25	0.00	0 mm	Ant 6	V1	DLX502KKYD1	29.3	top	94.2	0.000	1.000	1.062	0.000	0.000	0.000	
5610	122	802.11ac	OFDM	80	16.25	16.24	-0.12	0 mm	Ant 6	V1	DLX502KKYD1	29.3	right	94.2	1.040	1.002	1.062	1.107	0.312	0.332	
5690	138	802.11ac	OFDM	80	16.25	16.25	-0.04	0 mm	Ant 6	V1	DLX502KKYD1	29.3	right	94.2	1.090	1.000	1.062	1.158	0.329	0.349	
5690	138	802.11ac	OFDM	80	16.25	16.25	-0.12	0 mm	Ant 6	V2	DLX5038KYD1	29.3	right	94.2	1.070	1.000	1.062	1.136	0.307	0.326	
5690	138	802.11ac	OFDM	80	16.25	16.25	-0.19	0 mm	Ant 6	V1	DLX502KKYD1	29.3	left	94.2	0.008	1.000	1.062	0.008	0.002	0.002	
5530	106	802.11ac	OFDM	80	11.25	11.25	0.12	0 mm	Ant 6	V1	DLX502KKYD1	29.3	back	94.2	0.020	1.000	1.062	0.021	0.006	0.006	
5530	106	802.11ac	OFDM	80	11.25	11.25	-0.03	0 mm	Ant 6	V1	DLX502KKYD1	29.3	right	94.2	0.286	1.000	1.062	0.304	0.075	0.080	
5775	155	802.11ac	OFDM	80	15.50	15.50	-0.13	0 mm	Ant 6	V1	DLX502KKYD1	29.3	back	94.2	0.075	1.000	1.062	0.080	0.029	0.031	
5775	155	802.11ac	OFDM	80	15.50	15.50	0.00	0 mm	Ant 6	V1	DLX502KKYD1	29.3	top	94.2	0.000	1.000	1.062	0.000	0.000	0.000	
5775	155	802.11ac	OFDM	80	15.50	15.50	-0.01	0 mm	Ant 6	V1	DLX502KKYD1	29.3	right	94.2	1.110	1.000	1.062	1.179	0.320	0.340	A19
5775	155	802.11ac	OFDM	80	15.50	15.43	-0.14	0 mm	Ant 6	V2	DLX5038KYD1	29.3	right	94.2	0.843	1.016	1.062	0.910	0.237	0.256	
5775	155	802.11ac	OFDM	80	15.50	15.50	-0.01	0 mm	Ant 6	V1	DLX502KKYD1	29.3	left	94.2	0.000	1.000	1.062	0.000	0.000	0.000	
5775	155	802.11ac	OFDM	80	10.50	10.44	0.13	0 mm	Ant 6	V1	DLX502KKYD1	29.3	back	94.2	0.021	1.014	1.062	0.023	0.006	0.006	
5775	155	802.11ac	OFDM	80	10.50	10.44	-0.07	0 mm	Ant 6	V1	DLX502KKYD1	29.3	right	94.2	0.275	1.014	1.062	0.296	0.075	0.081	
5775	155	802.11ac	OFDM	80	15.50	15.50	-0.05	0 mm	Ant 6	V1	DLX502KKYD1	29.3	right	94.2	1.050	1.000	1.062	1.115	0.306	0.325	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Body													
Spatial Peak								1.6 W/kg (mW/g)													
Uncontrolled Exposure/General Population								averaged over 1 gram													

Note: Blue entry represents variability measurement.

Table 10-55
Bluetooth Body SAR – Ant 4A

MEASUREMENT RESULTS																				
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Variant	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	SAR (1g)	Scaling Factor (Cond Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #
MHz	Ch.													(W/kg)			(W/kg)	(W/kg)		
2402	0	Bluetooth	FHSS	14.75	14.45	-0.03	0 mm	Ant 4A	V1	DLXX303LKNQK	1	back	76.5	0.902	1.072	1.013	0.980	0.414	0.450	
2441	39	Bluetooth	FHSS	14.75	14.52	0.00	0 mm	Ant 4A	V1	DLXX303LKNQK	1	back	76.5	0.636	1.054	1.013	0.679	0.307	0.328	
2480	78	Bluetooth	FHSS	14.75	13.08	-0.02	0 mm	Ant 4A	V2	DLXX300UKNQ7	1	back	76.7	0.653	1.469	1.010	0.969	0.287	0.426	
2480	78	Bluetooth	FHSS	14.75	13.87	0.13	0 mm	Ant 4A	V1	DLXX303LKNQK	1	back	76.5	0.939	1.225	1.013	1.165	0.414	0.514	
2441	39	Bluetooth	FHSS	14.75	14.52	-0.10	0 mm	Ant 4A	V1	DLXX303LKNQK	1	top	76.5	0.459	1.054	1.013	0.490	0.144	0.154	
2441	39	Bluetooth	FHSS	14.75	14.52	0.13	0 mm	Ant 4A	V1	DLXX303LKNQK	1	bottom	76.5	0.002	1.054	1.013	0.002	0.000	0.000	
2441	39	Bluetooth	FHSS	14.75	14.52	0.07	0 mm	Ant 4A	V1	DLXX303LKNQK	1	left	76.5	0.607	1.054	1.013	0.648	0.216	0.231	
2402	0	Bluetooth	FHSS	7.75	7.75	0.04	0 mm	Ant 4A	V1	DLXX303LKNQK	1	back	76.5	0.123	1.000	1.013	0.125	0.059	0.060	
2402	0	Bluetooth	FHSS	7.75	7.75	0.02	0 mm	Ant 4A	V1	DLXX303LKNQK	1	top	76.5	0.071	1.000	1.013	0.072	0.023	0.023	
2402	0	Bluetooth	FHSS	7.75	7.75	0.19	0 mm	Ant 4A	V1	DLXX303LKNQK	1	right	76.5	0.000	1.000	1.013	0.000	0.000	0.000	
2402	0	Bluetooth	FHSS	7.75	7.75	0.19	0 mm	Ant 4A	V1	DLXX303LKNQK	1	left	76.5	0.118	1.000	1.013	0.120	0.042	0.043	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT							Body													
Spatial Peak							1.6 W/kg (mW/g)													
Uncontrolled Exposure/General Population							averaged over 1 gram													

Note: The reported SAR was scaled to the 77.5% transmission duty factor to determine compliance since the duty factor of the device is permanently limited to 77.5% per the manufacturer.

FCC ID: BCGA2014		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 158 of 195

Table 10-56
Bluetooth Body SAR – Ant 2A

MEASUREMENT RESULTS																				
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Variant	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	SAR (1g)	Scaling Factor (Cond Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #
MHz	Ch.													(W/kg)			(W/kg)	(W/kg)		
2402	0	Bluetooth	FHSS	14.75	14.75	-0.04	0 mm	Ant 2A	V1	DLXX303LKNQK	1	back	76.1	0.853	1.000	1.018	0.868	0.389	0.396	
2441	39	Bluetooth	FHSS	14.75	14.58	0.06	0 mm	Ant 2A	V1	DLXX303LKNQK	1	back	76.1	0.992	1.040	1.018	1.050	0.445	0.471	
2480	78	Bluetooth	FHSS	14.75	14.39	-0.03	0 mm	Ant 2A	V1	DLXX303LKNQK	1	back	76.1	1.050	1.086	1.018	1.161	0.462	0.511	A20
2480	78	Bluetooth	FHSS	14.75	14.25	0.07	0 mm	Ant 2A	V2	DLXX300UKNQ7	1	back	76.8	0.814	1.122	1.009	0.922	0.377	0.427	
2402	0	Bluetooth	FHSS	14.75	14.75	-0.05	0 mm	Ant 2A	V1	DLXX303LKNQK	1	bottom	76.1	0.396	1.000	1.018	0.403	0.127	0.129	
2402	0	Bluetooth	FHSS	14.75	14.75	-0.03	0 mm	Ant 2A	V1	DLXX303LKNQK	1	right	76.1	0.591	1.000	1.018	0.602	0.216	0.220	
2402	0	Bluetooth	FHSS	7.75	7.75	-0.09	0 mm	Ant 2A	V1	DLXX303LKNQK	1	back	76.1	0.176	1.000	1.018	0.179	0.080	0.081	
2402	0	Bluetooth	FHSS	7.75	7.75	-0.05	0 mm	Ant 2A	V1	DLXX303LKNQK	1	bottom	76.1	0.069	1.000	1.018	0.070	0.022	0.022	
2402	0	Bluetooth	FHSS	7.75	7.75	0.05	0 mm	Ant 2A	V1	DLXX303LKNQK	1	right	76.1	0.111	1.000	1.018	0.113	0.039	0.040	
2402	0	Bluetooth	FHSS	12.50	12.13	0.04	0 mm	Ant 2A	V1	DLXX303LKNQK	1	back	76.1	0.481	1.089	1.018	0.533	0.222	0.246	
2402	0	Bluetooth	FHSS	12.50	12.13	-0.04	0 mm	Ant 2A	V1	DLXX303LKNQK	1	bottom	76.1	0.226	1.089	1.018	0.251	0.072	0.080	
2402	0	Bluetooth	FHSS	12.50	12.13	-0.06	0 mm	Ant 2A	V1	DLXX303LKNQK	1	right	76.1	0.276	1.089	1.018	0.306	0.108	0.120	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram													

Note: The reported SAR was scaled to the 77.5% transmission duty factor to determine compliance since the duty factor of the device is permanently limited to 77.5% per the manufacturer.

Table 10-57
Bluetooth Body SAR – Ant 5

MEASUREMENT RESULTS																				
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Variant	Device Serial Number	Data Rate [Mbps]	Side	Duty Cycle (%)	SAR (1g)	Scaling Factor (Cond Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	SAR (10g)	Reported SAR (10g)	Plot #
MHz	Ch.													(W/kg)			(W/kg)	(W/kg)		
2402	0	Bluetooth	FHSS	17.5	16.00	0.15	0 mm	Ant 5	V2	DLXX300UKNQ7	1	back	76.5	0.002	1.413	1.013	0.003	0.000	0.000	
2402	0	Bluetooth	FHSS	17.5	16.00	0.00	0 mm	Ant 5	V2	DLXX300UKNQ7	1	bottom	76.5	0.000	1.413	1.013	0.000	0.000	0.000	
2402	0	Bluetooth	FHSS	17.5	16.00	0.12	0 mm	Ant 5	V2	DLXX300UKNQ7	1	right	76.5	0.078	1.413	1.013	0.112	0.025	0.036	
2402	0	Bluetooth	FHSS	17.5	15.84	0.15	0 mm	Ant 5	V1	DLXX303LKNQK	1	right	76.5	0.055	1.466	1.013	0.082	0.017	0.025	
2480	78	Bluetooth	FHSS	15.5	15.44	0.00	0 mm	Ant 5	V2	DLXX300UKNQ7	1	back	76.5	0.000	1.014	1.013	0.000	0.000	0.000	
2480	78	Bluetooth	FHSS	15.5	15.44	0.00	0 mm	Ant 5	V2	DLXX300UKNQ7	1	bottom	76.5	0.000	1.014	1.013	0.000	0.000	0.000	
2480	78	Bluetooth	FHSS	15.5	15.44	-0.16	0 mm	Ant 5	V2	DLXX300UKNQ7	1	right	76.5	0.011	1.014	1.013	0.011	0.003	0.003	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram													

Note: The reported SAR was scaled to the 77.5% transmission duty factor to determine compliance since the duty factor of the device is permanently limited to 77.5% per the manufacturer.

FCC ID: BCGA2014		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 159 of 195

10.2 SAR Test Notes

General Notes:

1. The test data reported are the worst-case SAR values according to test procedures specified in FCC KDB Publication 616217 D04v01r02 and FCC KDB Publication 447498 D01v06.
2. Batteries are fully charged at the beginning of the SAR measurements.
3. Liquid tissue depth was at least 15.0 cm for all frequencies.
4. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
5. SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D01v06.
6. Per FCC KDB 865664 D01v01r04, variability SAR tests were performed when the measured SAR results for a frequency band were greater than or equal to 0.8 W/kg. Repeated SAR measurements are highlighted in the tables above for clarity. Please see Section 12 for variability analysis.
7. FCC KDB Publication 616217 D04v01r02 Section 4.3, SAR tests are required for the back surface and edges of the tablet with the tablet touching the phantom. The SAR Exclusion Threshold in FCC KDB 447498 D01v06 was applied to determine SAR test exclusion for adjacent edge configurations.

GSM Test Notes:

1. Justification for reduced test configurations per KDB Publication 941225 D01v03r01 and October 2013 TCB Workshop Notes: The source-based frame-averaged output power was evaluated for all GPRS/EDGE slot configurations. The configuration with the highest target frame averaged output power was evaluated for SAR. When the maximum frame-averaged powers are equivalent across two or more slots (within 0.25 dB), the configuration with the most number of time slots was tested.
2. Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg for 1g evaluations then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel was used.

UMTS Notes:

1. UMTS mode in was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01v03r01. HSPA SAR was not required per the 3G Test Reduction Procedure in KDB Publication 941225 D01v03r01.
2. Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg for 1g evaluations then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel was used.

LTE Notes:

1. LTE Considerations: LTE test configurations are determined according to SAR Evaluation Considerations for LTE Devices in FCC KDB Publication 941225 D05v02r04. The general test procedures used for testing can be found in Section 7.5.4.
2. MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.
3. A-MPR was disabled for all SAR tests by setting NS=01 and MCC=001 on the base station simulator. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).
4. Per FCC KDB Publication 447498 D01v06, when the reported (scaled) for LTE Band 41 SAR measured at the highest output power channel in a given a test configuration was > 0.6 W/kg for 1g evaluations, testing at the other channels was required for such test configurations.

FCC ID: BCGA2014	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 160 of 195

5. TDD LTE was tested per the guidance provided in FCC KDB Publication 941225 D05v02r04. Testing was performed using UL-DL configuration 0 with 6 UL subframes and 2 S subframes using extended cyclic prefix only and special subframe configuration 6. SAR tests were performed at maximum output power and worst-case transmission duty factor in extended cyclic prefix. Per 3GPP 36.211 Section 4, the duty factor for special subframe configuration 6 using extended cyclic prefix is 0.633.
6. Per KDB Publication 941225 D05Av01r02, SAR for downlink only LTE CA operations was not needed since the maximum average output power in LTE CA mode was not >0.25 dB higher than the maximum output power when downlink carrier aggregation was inactive.
7. This device supports Power Class 2 and Power Class 3 operations for LTE Band 41. The highest available duty cycle for Power Class 2 operations is 43.3 % using UL-DL configuration 1. Per FCC Guidance, all SAR tests were performed using Power Class 3. SAR with power class 2 at the available duty factor was additionally performed for the power class 3 configuration with the highest SAR configuration for each exposure conditions. Please see Section 13 for linearity results.
8. For LTE Band 7 and LTE Band 41, per Fall 2017 TCB Workshop Notes, SAR was first measured with only a single carrier active in the uplink (carrier aggregation not active). For each exposure condition, the uplink CA scenario with two component carriers was additionally tested for the configuration with the highest SAR when carrier aggregation was not active. The SCC was configured with the closest available contiguous channel. The two component carriers were configured so the resource blocks are physically allocated side by side to achieve the maximum output power. When the reported 1g SAR was >1.2 W/kg or the reported 10g SAR was > 3.0 W/kg, all required test channels were additionally evaluated.

WLAN Notes:

1. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 2.4 GHz WIFI single transmission chain operations, the highest measured maximum output power channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4 GHz 802.11g/n) was not required due to the maximum allowed powers and the highest reported DSSS SAR. See Section 7.6.4 for more information.
2. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 5 GHz WIFI single transmission chain operations, the initial test configuration was selected according to the transmission mode with the highest maximum allowed powers. Other transmission modes were not investigated since the highest reported SAR for initial test configuration adjusted by the ratio of maximum output powers is less than 1.2 W/kg for 1g evaluations. See Section 7.6.5 for more information.
3. Per KDB Publication 248227 D01v02r02, SAR for MIMO was evaluated by following the simultaneous SAR provisions from KDB Publication 447498 D01v06 by either evaluating the sum of the 1g SAR values of each antenna transmitting independently or making a SAR measurement with both antennas transmitting simultaneously. Please see Section 11 for complete analysis.
4. When the maximum reported 1g averaged SAR is ≤ 0.8 W/kg, SAR testing on additional channels was not required. Otherwise, SAR for the next highest output power channel was required until the reported SAR result was ≤ 1.20 W/kg for 1g evaluations or all test channels were measured.
5. The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools. The reported SAR was scaled to the 100% transmission duty factor to determine compliance. Procedures used to measure the duty factor are identical to that in the associated EMC test reports.

Bluetooth Notes

1. Bluetooth SAR was evaluated with a test mode with hopping disabled with DH5 operation. The reported SAR was scaled to the 77.5% transmission duty factor to determine compliance since the duty factor of the device is limited to 77.5% per the manufacturer. See Section 8.6 for the time domain plot and calculation for the duty factor of the device.

FCC ID: BCGA2014	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 161 of 195

11 FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS

11.1 Introduction

The following procedures adopted from FCC KDB Publication 447498 D01v06 are applicable to devices with built-in unlicensed transmitters such as 802.11 and Bluetooth devices which may simultaneously transmit with the licensed transmitter.

11.2 Simultaneous Transmission Procedures

This device contains transmitters that may operate simultaneously. Therefore, simultaneous transmission analysis is required. Per FCC KDB Publication 447498 D01v06 4.3.2 and IEEE 1528-2013 Section 6.3.4.1.2, simultaneous transmission SAR test exclusion may be applied when the sum of the 1g SAR for all the simultaneous transmitting antennas in a specific physical test configuration is ≤ 1.6 W/kg. The different test positions in an exposure condition may be considered collectively to determine SAR test exclusion according to the sum of 1g or 10g SAR.

Note: For SAR summations for some scenarios when the output power levels are reduced, SAR values at the maximum output power level were used as the most conservative evaluation for simultaneous transmission analysis.

** The SAR distributions for at least one of the antennas are spatially separated from the other antennas per FCC KDB Publication 248227 Section 6.1 procedures. Therefore, the simultaneous transmission were treated independently for this configuration. See Section 11.4 for more information about the Spatial Separation Analysis.

11.3 Body SAR Simultaneous Transmission Analysis

Table 11-1
Cellular Ant 1 Simultaneous Transmission Scenario with 2.4 GHz WLAN

Simult Tx	Configuration	Cellular Band Ant 1 SAR (W/kg)	2.4 GHz WLAN Ant 2a SAR (W/kg)	2.4 GHz WLAN Ant 4a SAR (W/kg)	2.4 GHz WLAN Ant 5 SAR (W/kg)	Σ SAR (W/kg)				
		1	2	3	4	1+2	1+3	1+4	1+2+3	1+3+4
Body SAR	Back	0.826	1.156	1.139	0.015	1.156**	1.139**	0.841	1.156**	1.139**
	Top	0.400*	0.024	0.574	0.000	0.424	0.974	0.400	0.998	0.974
	Bottom	0.798	0.624	0.035	0.000	1.422	0.833	0.798	1.457	0.833
	Right	0.032	0.777	0.400*	0.331	0.809	0.432	0.363	1.209	0.763
	Left	1.136	0.400*	0.676	0.400*	1.536	1.136**	1.536	1.536**	1.536**

Table 11-2
Cellular Ant 3 Simultaneous Transmission Scenario with 2.4 GHz WLAN

Simult Tx	Configuration	Cellular Band Ant 3 SAR (W/kg)	2.4 GHz WLAN Ant 2a SAR (W/kg)	2.4 GHz WLAN Ant 4a SAR (W/kg)	2.4 GHz WLAN Ant 5 SAR (W/kg)	Σ SAR (W/kg)				
		1	2	3	4	1+2	1+3	1+4	1+2+3	1+3+4
Body SAR	Back	1.144	1.156	1.139	0.015	1.156**	1.144**	1.159	1.156**	1.144**
	Top	0.795	0.024	0.574	0.000	0.819	1.369	0.795	1.393	1.369
	Bottom	0.400*	0.624	0.035	0.000	1.024	0.435	0.400	1.059	0.435
	Right	1.042	0.777	0.400*	0.331	1.042**	1.442	1.373	1.442**	1.442**
	Left	0.400*	0.400*	0.676	0.400*	0.800	1.076	0.800	1.476	1.476

FCC ID: BCGA2014	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 162 of 195

Table 11-3
Cellular Ant 4A Simultaneous Transmission Scenario with 2.4 GHz WLAN

Simult Tx	Configuration	Cellular Band Ant 4A SAR (W/kg)	2.4 GHz WLAN Ant 2a SAR (W/kg)	2.4 GHz WLAN Ant 4a Reduced at 6.75 dBm SAR (W/kg)	2.4 GHz WLAN Ant 5 SAR (W/kg)	Σ SAR (W/kg)				
		1	2	3	4	1+2	1+3	1+4	1+2+3	1+3+4
Body SAR	Back	1.188	1.156	0.195	0.015	1.188**	1.383	1.203	1.383**	1.398
	Top	0.662	0.024	0.091	0.000	0.686	0.753	0.662	0.777	0.753
	Bottom	0.400*	0.624	0.400*	0.000	1.024	0.800	0.400	1.424	0.800
	Right	0.047	0.777	0.400*	0.331	0.824	0.447	0.378	1.224	0.778
	Left	1.189	0.400*	0.128	0.400*	1.589	1.317	1.589	1.317**	1.317**

Table 11-4
Cellular Ant 4B Simultaneous Transmission Scenario with 2.4 GHz WLAN

Simult Tx	Configuration	Cellular Band Ant 4B SAR (W/kg)	2.4 GHz WLAN Ant 2a SAR (W/kg)	2.4 GHz WLAN Ant 4a Reduced at 6.75 dBm SAR (W/kg)	2.4 GHz WLAN Ant 5 SAR (W/kg)	Σ SAR (W/kg)				
		1	2	3	4	1+2	1+3	1+4	1+2+3	1+3+4
Body SAR	Back	1.189	1.156	0.195	0.015	1.189**	1.384	1.204	1.384**	1.399
	Top	1.140	0.024	0.091	0.000	1.164	1.231	1.140	1.255	1.231
	Bottom	0.400*	0.624	0.400*	0.000	1.024	0.800	0.400	1.424	0.800
	Right	0.055	0.777	0.400*	0.331	0.832	0.455	0.386	1.232	0.786
	Left	0.077	0.400*	0.128	0.400*	0.477	0.205	0.477	0.605	0.605

Table 11-5
Cellular Ant 2A Simultaneous Transmission Scenario with 2.4 GHz WLAN

Simult Tx	Configuration	Cellular Band Ant 2A SAR (W/kg)	2.4 GHz WLAN Ant 2a Reduced at 7.25 dBm SAR (W/kg)	2.4 GHz WLAN Ant 4a SAR (W/kg)	2.4 GHz WLAN Ant 5 SAR (W/kg)	Σ SAR (W/kg)				
		1	2	3	4	1+2	1+3	1+4	1+2+3	1+3+4
Body SAR	Back	1.184	0.220	1.139	0.015	1.404	1.184**	1.199	1.404**	1.199**
	Top	0.400*	0.400*	0.574	0.000	0.800	0.974	0.400	1.374	0.974
	Bottom	0.755	0.107	0.035	0.000	0.862	0.790	0.755	0.897	0.790
	Right	1.159	0.133	0.400*	0.331	1.292	1.559	1.490	1.292**	1.490**
	Left	0.400*	0.400*	0.676	0.400*	0.800	1.076	0.800	1.476	1.476

Table 11-6
Cellular Ant 2B Simultaneous Transmission Scenario with 2.4 GHz WLAN

Simult Tx	Configuration	Cellular Band Ant 2B SAR (W/kg)	2.4 GHz WLAN Ant 2a Reduced at 7.25 dBm SAR (W/kg)	2.4 GHz WLAN Ant 4a SAR (W/kg)	2.4 GHz WLAN Ant 5 SAR (W/kg)	Σ SAR (W/kg)				
		1	2	3	4	1+2	1+3	1+4	1+2+3	1+3+4
Body SAR	Back	1.188	0.220	1.139	0.015	1.408	1.188**	1.203	1.408**	1.203**
	Top	0.400*	0.400*	0.574	0.000	0.800	0.974	0.400	1.374	0.974
	Bottom	0.940	0.107	0.035	0.000	1.047	0.975	0.940	1.082	0.975
	Right	0.060	0.133	0.400*	0.331	0.193	0.460	0.391	0.593	0.791
	Left	0.400*	0.400*	0.676	0.400*	0.800	1.076	0.800	1.476	1.476

Table 11-7
Cellular Ant 1 Simultaneous Transmission Scenario with 5 GHz WLAN

Simult Tx	Configuration	Cellular Band Ant 1 SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body SAR	Back	0.826	0.085	0.080	0.911	0.906	0.991
	Top	0.400*	0.000	0.006	0.400	0.406	0.406
	Bottom	0.798	0.000	0.400*	0.798	1.198	1.198
	Right	0.032	1.151	1.179	1.183	1.211	1.183**
	Left	1.136	0.007	0.008	1.143	1.144	1.151

FCC ID: BCGA2014		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 163 of 195

Table 11-8
Cellular Ant 3 Simultaneous Transmission Scenario with 5 GHz WLAN

Simult Tx	Configuration	Cellular Band Ant 3 SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 Reduced SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body SAR	Back	1.144	0.085	0.023	1.229	1.167	1.252
	Top	0.795	0.000	0.006	0.795	0.801	0.801
	Bottom	0.400*	0.000	0.400*	0.400	0.800	0.800
	Right	1.042	1.151	0.304	1.151**	1.346	1.346**
	Left	0.400*	0.007	0.008	0.407	0.408	0.415

Table 11-9
Cellular Ant 4A Simultaneous Transmission Scenario with 5 GHz WLAN

Simult Tx	Configuration	Cellular Band Ant 4A SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body SAR	Back	1.188	0.085	0.080	1.273	1.268	1.353
	Top	0.662	0.000	0.006	0.662	0.668	0.668
	Bottom	0.400*	0.000	0.400*	0.400	0.800	0.800
	Right	0.047	1.151	1.179	1.198	1.226	1.226**
	Left	1.189	0.007	0.008	1.196	1.197	1.204

Table 11-10
Cellular Ant 4B Simultaneous Transmission Scenario with 5 GHz WLAN

Simult Tx	Configuration	Cellular Band Ant 4B SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body SAR	Back	1.189	0.085	0.080	1.274	1.269	1.354
	Top	1.140	0.000	0.006	1.140	1.146	1.146
	Bottom	0.400*	0.000	0.400*	0.400	0.800	0.800
	Right	0.055	1.151	1.179	1.206	1.234	1.234**
	Left	0.077	0.007	0.008	0.084	0.085	0.092

Table 11-11
Cellular Ant 2A Simultaneous Transmission Scenario with 5 GHz WLAN

Simult Tx	Configuration	Cellular Band Ant 2A SAR (W/kg)	5 GHz WLAN Ant 5 Reduced SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body SAR	Back	1.184	0.016	0.080	1.200	1.264	1.280
	Top	0.400*	0.400*	0.006	0.800	0.406	0.806
	Bottom	0.755	0.000	0.400*	0.755	1.155	1.155
	Right	1.159	0.177	1.179	1.336	1.179**	1.336**
	Left	0.400*	0.007	0.008	0.407	0.408	0.415

FCC ID: BCGA2014	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device		Page 164 of 195

Table 11-12
Cellular Ant 2B Simultaneous Transmission Scenario with 5 GHz WLAN

Simult Tx	Configuration	Cellular Band Ant 2B SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body SAR	Back	1.188	0.085	0.080	1.273	1.268	1.353
	Top	0.400*	0.000	0.006	0.400	0.406	0.406
	Bottom	0.940	0.000	0.400*	0.940	1.340	1.340
	Right	0.060	1.151	1.179	1.211	1.239	1.211**
	Left	0.400*	0.007	0.008	0.407	0.408	0.415

Table 11-13
Cellular Ant 1 Simultaneous Transmission Scenario with Bluetooth

Simult Tx	Configuration	Cellular Band Ant 1 SAR (W/kg)	Bluetooth Ant 2a at 7.75 dBm SAR (W/kg)	Bluetooth Ant 4a SAR (W/kg)	Bluetooth Ant 5 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2	1+3	1+4
Body SAR	Back	0.826	0.179	1.165	0.003	1.005	1.165**	0.829
	Top	0.400*	0.400*	0.490	0.400*	0.800	0.890	0.800
	Bottom	0.798	0.070	0.002	0.000	0.868	0.800	0.798
	Right	0.032	0.113	0.400*	0.112	0.145	0.432	0.144
	Left	1.136	0.400*	0.648	0.400*	1.536	1.136**	1.536

Table 11-14
Cellular Ant 3 Simultaneous Transmission Scenario with Bluetooth

Simult Tx	Configuration	Cellular Band Ant 3 SAR (W/kg)	Bluetooth Ant 2a SAR (W/kg)	Bluetooth Ant 4a at 7.75 dBm SAR (W/kg)	Bluetooth Ant 5 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2	1+3	1+4
Body SAR	Back	1.144	1.161	0.125	0.003	1.161**	1.269	1.147
	Top	0.795	0.400*	0.072	0.400*	1.195	0.867	1.195
	Bottom	0.400*	0.403	0.400*	0.000	0.803	0.800	0.400
	Right	1.042	0.602	0.000	0.112	1.042**	1.042	1.154
	Left	0.400*	0.400*	0.120	0.400*	0.800	0.520	0.800

Table 11-15
Cellular Ant 4A Simultaneous Transmission Scenario with Bluetooth

Simult Tx	Configuration	Cellular Band Ant 4A SAR (W/kg)	Bluetooth Ant 2a SAR (W/kg)	Bluetooth Ant 4a at 7.75 dBm SAR (W/kg)	Bluetooth Ant 5 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2	1+3	1+4
Body SAR	Back	1.188	1.161	0.125	0.003	1.188**	1.313	1.191
	Top	0.662	0.400*	0.072	0.400*	1.062	0.734	1.062
	Bottom	0.400*	0.403	0.400*	0.000	0.803	0.800	0.400
	Right	0.047	0.602	0.000	0.112	0.649	0.047	0.159
	Left	1.189	0.400*	0.120	0.400*	1.589	1.309	1.589

Table 11-16
Cellular Ant 4B Simultaneous Transmission Scenario with Bluetooth

Simult Tx	Configuration	Cellular Band Ant 4B SAR (W/kg)	Bluetooth Ant 2a SAR (W/kg)	Bluetooth Ant 4a at 7.75 dBm SAR (W/kg)	Bluetooth Ant 5 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2	1+3	1+4
Body SAR	Back	1.189	1.161	0.125	0.003	1.189**	1.314	1.192
	Top	1.140	0.400*	0.072	0.400*	1.540	1.212	1.540
	Bottom	0.400*	0.403	0.400*	0.000	0.803	0.800	0.400
	Right	0.055	0.602	0.000	0.112	0.657	0.055	0.167
	Left	0.077	0.400*	0.120	0.400*	0.477	0.197	0.477

FCC ID: BCGA2014		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device		Page 165 of 195

Table 11-17
Cellular Ant 2A Simultaneous Transmission Scenario with Bluetooth

Simult Tx	Configuration	Cellular Band Ant 2A SAR (W/kg)	Bluetooth Ant 2a at 7.75 dBm SAR (W/kg)	Bluetooth Ant 4a SAR (W/kg)	Bluetooth Ant 5 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2	1+3	1+4
Body SAR	Back	1.184	0.179	1.165	0.003	1.363	1.184**	1.187
	Top	0.400*	0.400*	0.490	0.400*	0.800	0.890	0.800
	Bottom	0.755	0.070	0.002	0.000	0.825	0.757	0.755
	Right	1.159	0.113	0.400*	0.112	1.272	1.559	1.271
	Left	0.400*	0.400*	0.648	0.400*	0.800	1.048	0.800

Table 11-18
Cellular Ant 2B Simultaneous Transmission Scenario with Bluetooth

Simult Tx	Configuration	Cellular Band Ant 2B SAR (W/kg)	Bluetooth Ant 2a at 7.75 dBm SAR (W/kg)	Bluetooth Ant 4a SAR (W/kg)	Bluetooth Ant 5 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2	1+3	1+4
Body SAR	Back	1.188	0.179	1.165	0.003	1.367	1.188**	1.191
	Top	0.400*	0.400*	0.490	0.400*	0.800	0.890	0.800
	Bottom	0.940	0.070	0.002	0.000	1.010	0.942	0.940
	Right	0.060	0.113	0.400*	0.112	0.173	0.460	0.172
	Left	0.400*	0.400*	0.648	0.400*	0.800	1.048	0.800

Table 11-19
Cellular Ant 1 Simultaneous Transmission Scenario with Bluetooth and 5 GHz WLAN

Simult Tx	Configuration	Cellular Band Ant 1 SAR (W/kg)	Bluetooth Ant 2a at 7.75 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	0.826	0.179	0.085	0.080	1.090	1.085	1.170
	Top	0.400*	0.400*	0.000	0.006	0.800	0.806	0.806
	Bottom	0.798	0.070	0.000	0.400*	0.868	1.268	1.268
	Right	0.032	0.113	1.151	1.179	1.296	1.324	1.296**
	Left	1.136	0.400*	0.007	0.008	1.543	1.544	1.551
Simult Tx	Configuration	Cellular Band Ant 1 SAR (W/kg)	Bluetooth Ant 4a SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	0.826	1.165	0.085	0.080	1.165**	1.165**	1.165**
	Top	0.400*	0.490	0.000	0.006	0.890	0.896	0.896
	Bottom	0.798	0.002	0.000	0.400*	0.800	1.200	1.200
	Right	0.032	0.400*	1.151	1.179	1.583	1.579**	1.579**
	Left	1.136	0.648	0.007	0.008	1.143**	1.136**	1.143**
Simult Tx	Configuration	Cellular Band Ant 1 SAR (W/kg)	Bluetooth Ant 5 at 15.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	0.826	0.000	0.085	0.080	0.911	0.906	0.991
	Top	0.400*	0.400*	0.000	0.006	0.800	0.806	0.806
	Bottom	0.798	0.000	0.000	0.400*	0.798	1.198	1.198
	Right	0.032	0.011	1.151	1.179	1.194	1.222	1.194**
	Left	1.136	0.400*	0.007	0.008	1.543	1.544	1.551

FCC ID: BCGA2014		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 166 of 195

Table 11-20
Cellular Ant 3 Simultaneous Transmission Scenario with Bluetooth and 5 GHz WLAN

Simult Tx	Configuration	Cellular Band Ant 3 SAR (W/kg)	Bluetooth Ant 2a at 12.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 Reduced SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.144	0.533	0.085	0.023	1.144**	1.167**	1.167**
	Top	0.795	0.400*	0.000	0.006	1.195	0.801	1.201
	Bottom	0.400*	0.251	0.000	0.400*	0.651	1.051	1.051
	Right	1.042	0.306	1.151	0.304	1.457**	1.346**	1.457**
	Left	0.400*	0.400*	0.007	0.008	0.807	0.408	0.815
Simult Tx	Configuration	Cellular Band Ant 3 SAR (W/kg)	Bluetooth Ant 4a at 7.75 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 Reduced SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.144	0.125	0.085	0.023	1.354	1.292	1.377
	Top	0.795	0.072	0.000	0.006	0.867	0.873	0.873
	Bottom	0.400*	0.400*	0.000	0.400*	0.800	1.200	1.200
	Right	1.042	0.000	1.151	0.304	1.151**	1.346	1.346**
	Left	0.400*	0.120	0.007	0.008	0.527	0.528	0.535
Simult Tx	Configuration	Cellular Band Ant 3 SAR (W/kg)	Bluetooth Ant 5 SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 Reduced SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.144	0.003	0.085	0.023	1.232	1.170	1.255
	Top	0.795	0.400*	0.000	0.006	1.195	1.201	1.201
	Bottom	0.400*	0.000	0.000	0.400*	0.400	0.800	0.800
	Right	1.042	0.112	1.151	0.304	1.263**	1.458	1.346**
	Left	0.400*	0.400*	0.007	0.008	0.807	0.808	0.815

Table 11-21
Cellular Ant 4A Simultaneous Transmission Scenario with Bluetooth and 5 GHz WLAN

Simult Tx	Configuration	Cellular Band Ant 4A SAR (W/kg)	Bluetooth Ant 2a at 12.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.188	0.533	0.085	0.080	1.188**	1.188**	1.188**
	Top	0.662	0.400*	0.000	0.006	1.062	1.068	1.068
	Bottom	0.400*	0.251	0.000	0.400*	0.651	1.051	1.051
	Right	0.047	0.306	1.151	1.179	1.504	1.532	1.457**
	Left	1.189	0.400*	0.007	0.008	1.189**	1.197**	1.197**
Simult Tx	Configuration	Cellular Band Ant 4A SAR (W/kg)	Bluetooth Ant 4a at 7.75 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.188	0.125	0.085	0.080	1.398	1.393	1.478
	Top	0.662	0.072	0.000	0.006	0.734	0.740	0.740
	Bottom	0.400*	0.400*	0.000	0.400*	0.800	1.200	1.200
	Right	0.047	0.000	1.151	1.179	1.198	1.226	1.226**
	Left	1.189	0.120	0.007	0.008	1.316	1.317	1.324
Simult Tx	Configuration	Cellular Band Ant 4A SAR (W/kg)	Bluetooth Ant 5 SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.188	0.003	0.085	0.080	1.276	1.271	1.356
	Top	0.662	0.400*	0.000	0.006	1.062	1.068	1.068
	Bottom	0.400*	0.000	0.000	0.400*	0.400	0.800	0.800
	Right	0.047	0.112	1.151	1.179	1.310	1.338	1.263**
	Left	1.189	0.400*	0.007	0.008	1.189**	1.197**	1.197**

FCC ID: BCGA2014		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 167 of 195

Table 11-22
Cellular Ant 4B Simultaneous Transmission Scenario with Bluetooth and 5 GHz WLAN

Simult Tx	Configuration	Cellular Band Ant 4B SAR (W/kg)	Bluetooth Ant 2a at 12.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.189	0.533	0.085	0.080	1.189**	1.189**	1.189**
	Top	1.140	0.400*	0.000	0.006	1.540	1.546	1.546
	Bottom	0.400*	0.251	0.000	0.400*	0.651	1.051	1.051
	Right	0.055	0.306	1.151	1.179	1.512	1.540	1.457**
	Left	0.077	0.400*	0.007	0.008	0.484	0.485	0.492
Simult Tx	Configuration	Cellular Band Ant 4B SAR (W/kg)	Bluetooth Ant 4a at 7.75 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.189	0.125	0.085	0.080	1.399	1.394	1.479
	Top	1.140	0.072	0.000	0.006	1.212	1.218	1.218
	Bottom	0.400*	0.400*	0.000	0.400*	0.800	1.200	1.200
	Right	0.055	0.000	1.151	1.179	1.206	1.234	1.234**
	Left	0.077	0.120	0.007	0.008	0.204	0.205	0.212
Simult Tx	Configuration	Cellular Band Ant 4B SAR (W/kg)	Bluetooth Ant 5 SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.189	0.003	0.085	0.080	1.277	1.272	1.357
	Top	1.140	0.400*	0.000	0.006	1.540	1.546	1.546
	Bottom	0.400*	0.000	0.000	0.400*	0.400	0.800	0.800
	Right	0.055	0.112	1.151	1.179	1.318	1.346	1.263**
	Left	0.077	0.400*	0.007	0.008	0.484	0.485	0.492

Table 11-23
Cellular Ant 2A Simultaneous Transmission Scenario with Bluetooth and 5 GHz WLAN

Simult Tx	Configuration	Cellular Band Ant 2A SAR (W/kg)	Bluetooth Ant 2a at 7.75 dBm SAR (W/kg)	5 GHz WLAN Ant 5 Reduced SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.184	0.179	0.016	0.080	1.379	1.443	1.459
	Top	0.400*	0.400*	0.400*	0.006	1.200	0.806	1.206
	Bottom	0.755	0.070	0.000	0.400*	0.825	1.225	1.225
	Right	1.159	0.113	0.177	1.179	1.449	1.272**	1.449**
	Left	0.400*	0.400*	0.007	0.008	0.807	0.808	0.815
Simult Tx	Configuration	Cellular Band Ant 2A SAR (W/kg)	Bluetooth Ant 4a SAR (W/kg)	5 GHz WLAN Ant 5 Reduced SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.184	1.165	0.016	0.080	1.200**	1.184**	1.200**
	Top	0.400*	0.490	0.400*	0.006	1.290	0.896	1.296
	Bottom	0.755	0.002	0.000	0.400*	0.757	1.157	1.157
	Right	1.159	0.400*	0.177	1.179	1.336**	1.579**	1.579**
	Left	0.400*	0.648	0.007	0.008	1.055	1.056	1.063
Simult Tx	Configuration	Cellular Band Ant 2A SAR (W/kg)	Bluetooth Ant 5 at 15.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 Reduced SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.184	0.000	0.016	0.080	1.200	1.264	1.280
	Top	0.400*	0.400*	0.400*	0.006	1.200	0.806	1.206
	Bottom	0.755	0.000	0.000	0.400*	0.755	1.155	1.155
	Right	1.159	0.011	0.177	1.179	1.347	1.179**	1.347**
	Left	0.400*	0.400*	0.007	0.008	0.807	0.808	0.815

FCC ID: BCGA2014		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 168 of 195

Table 11-24
Cellular Ant 2B Simultaneous Transmission Scenario with Bluetooth and 5 GHz WLAN

Simult Tx	Configuration	Cellular Band Ant 2B SAR (W/kg)	Bluetooth Ant 2a at 7.75 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.188	0.179	0.085	0.080	1.452	1.447	1.532
	Top	0.400*	0.400*	0.000	0.006	0.800	0.806	0.806
	Bottom	0.940	0.070	0.000	0.400*	1.010	1.410	1.410
	Right	0.060	0.113	1.151	1.179	1.324	1.352	1.324**
	Left	0.400*	0.400*	0.007	0.008	0.807	0.808	0.815
Simult Tx	Configuration	Cellular Band Ant 2B SAR (W/kg)	Bluetooth Ant 4a SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.188	1.165	0.085	0.080	1.273**	1.188**	1.273**
	Top	0.400*	0.490	0.000	0.006	0.890	0.896	0.896
	Bottom	0.940	0.002	0.000	0.400*	0.942	1.342	1.342
	Right	0.060	0.400*	1.151	1.179	1.211**	1.579**	1.579**
	Left	0.400*	0.648	0.007	0.008	1.055	1.056	1.063
Simult Tx	Configuration	Cellular Band Ant 2B SAR (W/kg)	Bluetooth Ant 5 at 15.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+3	1+2+4	1+2+3+4
Body SAR	Back	1.188	0.000	0.085	0.080	1.273	1.268	1.353
	Top	0.400*	0.400*	0.000	0.006	0.800	0.806	0.806
	Bottom	0.940	0.000	0.000	0.400*	0.940	1.340	1.340
	Right	0.060	0.011	1.151	1.179	1.222	1.250	1.222**
	Left	0.400*	0.400*	0.007	0.008	0.807	0.808	0.815

Table 11-25
Simultaneous Transmission Scenario with Bluetooth and 5 GHz WLAN

Simult Tx	Configuration	Bluetooth Ant 4a SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body SAR	Back	1.165	0.085	1.250
	Top	0.490	0.000	0.490
	Bottom	0.002	0.000	0.002
	Right	0.400*	1.151	1.551
	Left	0.648	0.007	0.655
Simult Tx	Configuration	Bluetooth Ant 2a at 12.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body SAR	Back	0.533	0.085	0.618
	Top	0.400*	0.000	0.400
	Bottom	0.251	0.000	0.251
	Right	0.306	1.151	1.457
	Left	0.400*	0.007	0.407
Simult Tx	Configuration	Bluetooth Ant 5 SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body SAR	Back	0.003	0.085	0.088
	Top	0.400*	0.000	0.400
	Bottom	0.000	0.000	0.000
	Right	0.112	1.151	1.263
	Left	0.400*	0.007	0.407

FCC ID: BCGA2014	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device		Page 169 of 195

Simult Tx	Configuration	Bluetooth Ant 4a SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body SAR	Back	1.165	0.080	1.245
	Top	0.490	0.006	0.496
	Bottom	0.002	0.400*	0.402
	Right	0.400*	1.179	1.579
	Left	0.648	0.008	0.656
Simult Tx	Configuration	Bluetooth Ant 2a at 12.5 dBm SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body SAR	Back	0.533	0.080	0.613
	Top	0.400*	0.006	0.406
	Bottom	0.251	0.400*	0.651
	Right	0.306	1.179	1.485
	Left	0.400*	0.008	0.408
Simult Tx	Configuration	Bluetooth Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body SAR	Back	0.003	0.080	0.083
	Top	0.400*	0.006	0.406
	Bottom	0.000	0.400*	0.400
	Right	0.112	1.179	1.291
	Left	0.400*	0.008	0.408

Simult Tx	Configuration	Bluetooth Ant 4a SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	1+2+3
Body SAR	Back	1.165	0.085	0.080	1.330
	Top	0.490	0.000	0.006	0.496
	Bottom	0.002	0.000	0.400*	0.402
	Right	0.400*	1.151	1.179	1.579**
	Left	0.648	0.007	0.008	0.663
Simult Tx	Configuration	Bluetooth Ant 2a at 12.5 dBm SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	1+2+3
Body SAR	Back	0.533	0.085	0.080	0.698
	Top	0.400*	0.000	0.006	0.406
	Bottom	0.251	0.000	0.400*	0.651
	Right	0.306	1.151	1.179	1.457**
	Left	0.400*	0.007	0.008	0.415
Simult Tx	Configuration	Bluetooth Ant 5 SAR (W/kg)	5 GHz WLAN Ant 5 SAR (W/kg)	5 GHz WLAN Ant 6 SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	1+2+3
Body SAR	Back	0.003	0.085	0.080	0.168
	Top	0.400*	0.000	0.006	0.406
	Bottom	0.000	0.000	0.400*	0.400
	Right	0.112	1.151	1.179	1.263**
	Left	0.400*	0.007	0.008	0.415

Notes:

1. When the antenna separation distance was > 50 mm, an estimated SAR of 0.4 W/kg was used to determine the simultaneous transmission SAR exclusion for test positions excluded per FCC KDB Publication 447498 D01v06.
2. For each position, the highest SAR value across all modes for the applicable cellular band antenna was considered for summation to determine simultaneous SAR test exclusion.

FCC ID: BCGA2014	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 170 of 195

11.4 Spatial Separation Analysis

Per FCC KDB Publication 248227, antennas may be considered spatially separated when the aggregate SAR from multiple antennas at any location in the combined SAR distribution is either $\leq 1.2\text{ W/kg}$ where at least 90% of the SAR is attributed to a single SAR distribution or $\leq 0.4\text{ W/kg}$ where no more than one SAR distribution is contributing $> 0.1\text{ W/kg}$.

Spatial separation was determined by inspection of the area scan SAR distributions to confirm that at all locations, SAR was $< 1.2\text{ W/kg}$, where at least 90% of the SAR is attributed to a single SAR distribution. See below for illustrations of the spatial separated antennas considered.

11.4.1 Back Side Spatial Separation Analysis

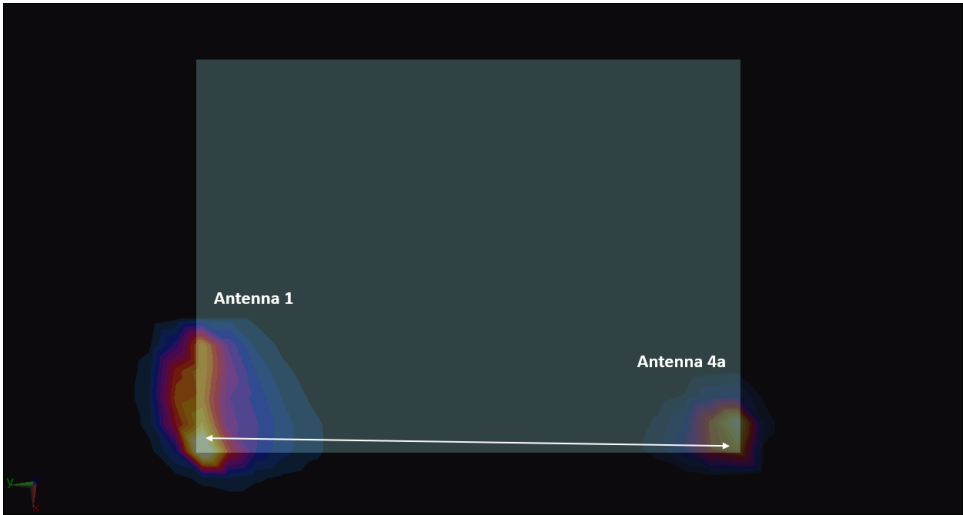


Figure 11-1
Back Side Spatial Separation for Antenna 4A and Antenna 1

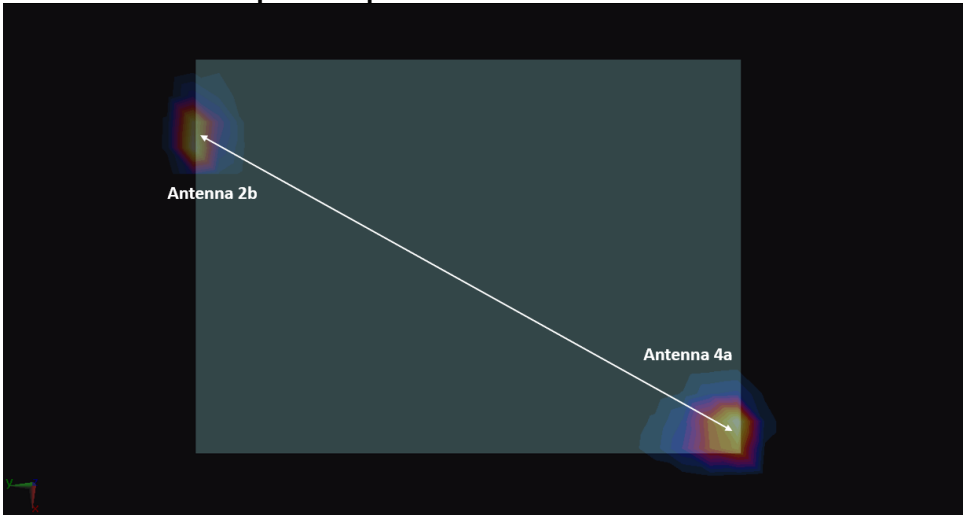


Figure 11-2
Back Side Spatial Separation for Antenna 4A and Antenna 2B

FCC ID: BCGA2014	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 171 of 195

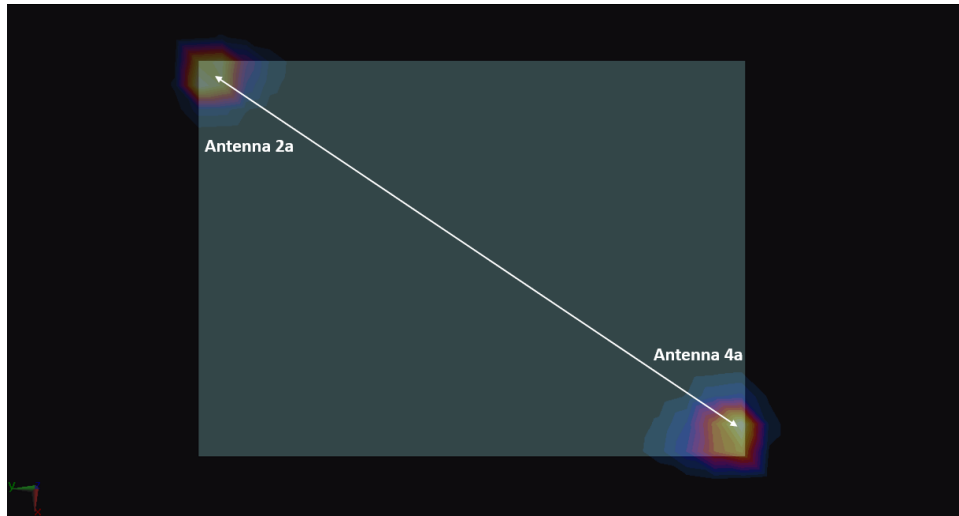


Figure 11-3
Back Side Spatial Separation for Antenna 4A and Antenna 2A

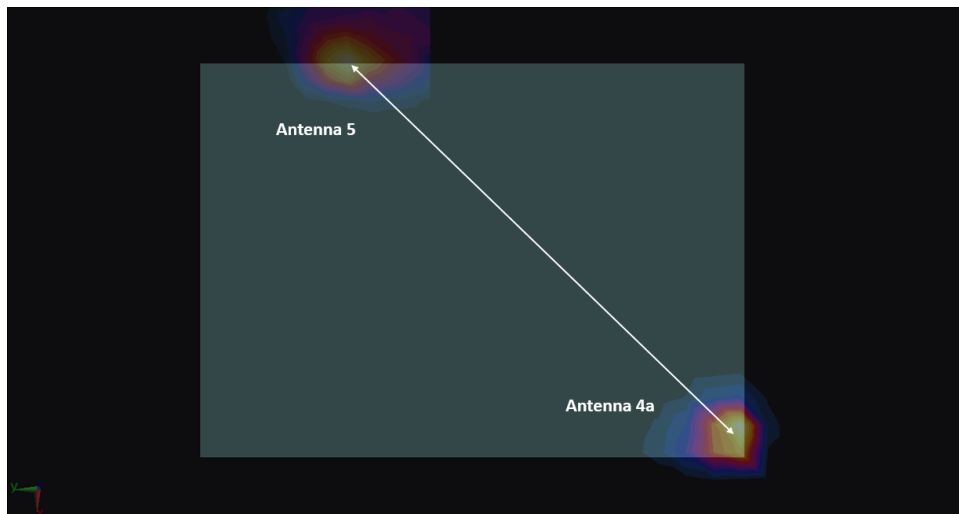


Figure 11-4
Back Side Spatial Separation for Antenna 4A and Antenna 5

FCC ID: BCGA2014	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 172 of 195

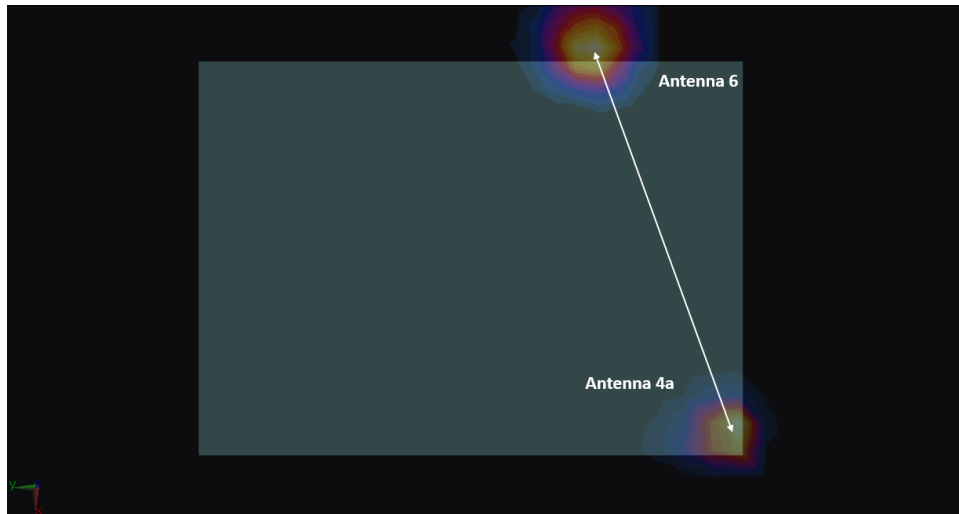


Figure 11-5
Back Side Spatial Separation for Antenna 4A and Antenna 6

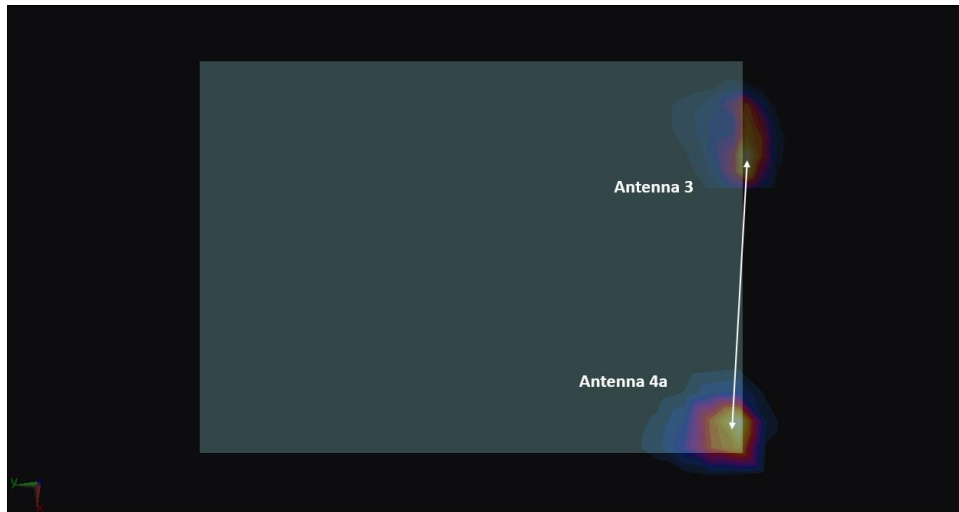


Figure 11-6
Back Side Spatial Separation for Antenna 4A and Antenna 3

FCC ID: BCGA2014	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 173 of 195

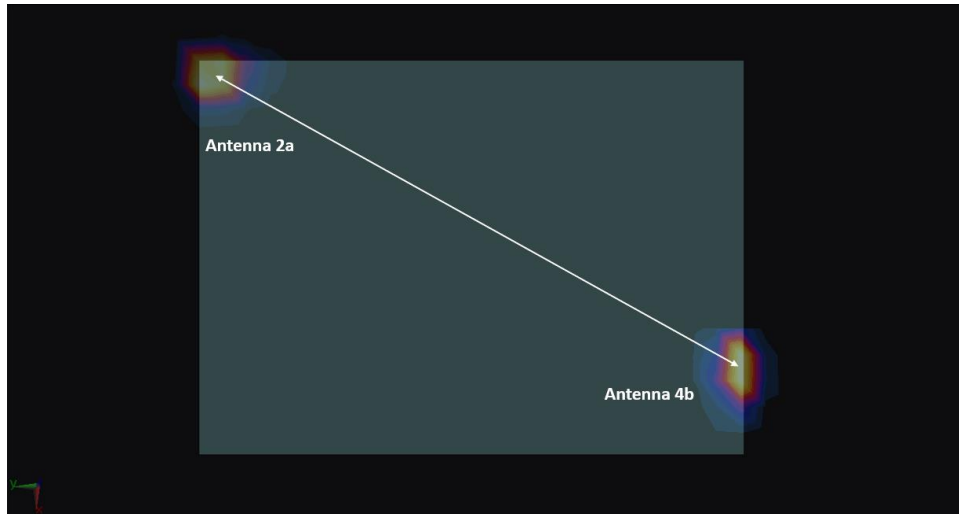


Figure 11-7
Back Side Spatial Separation for Antenna 4B and Antenna 2A

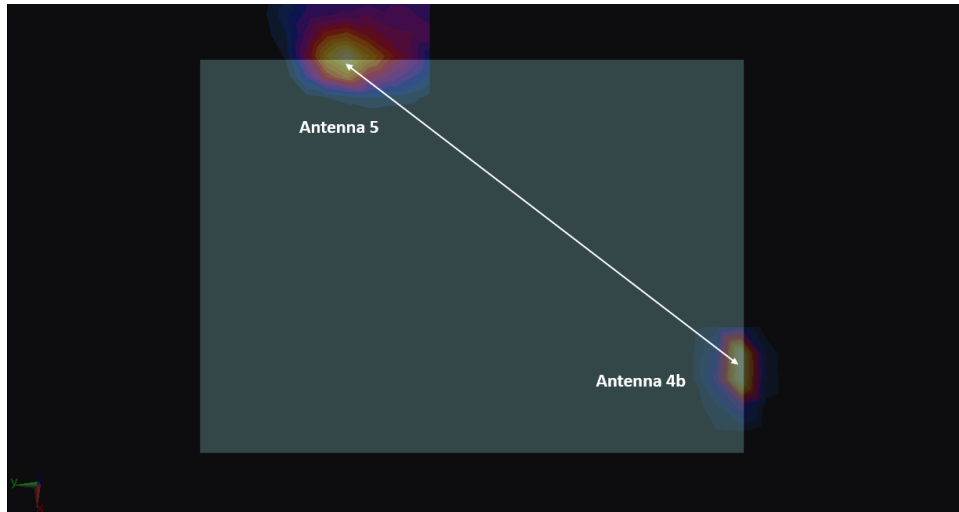


Figure 11-8
Back Side Spatial Separation for Antenna 4B and Antenna 5

FCC ID: BCGA2014	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 174 of 195

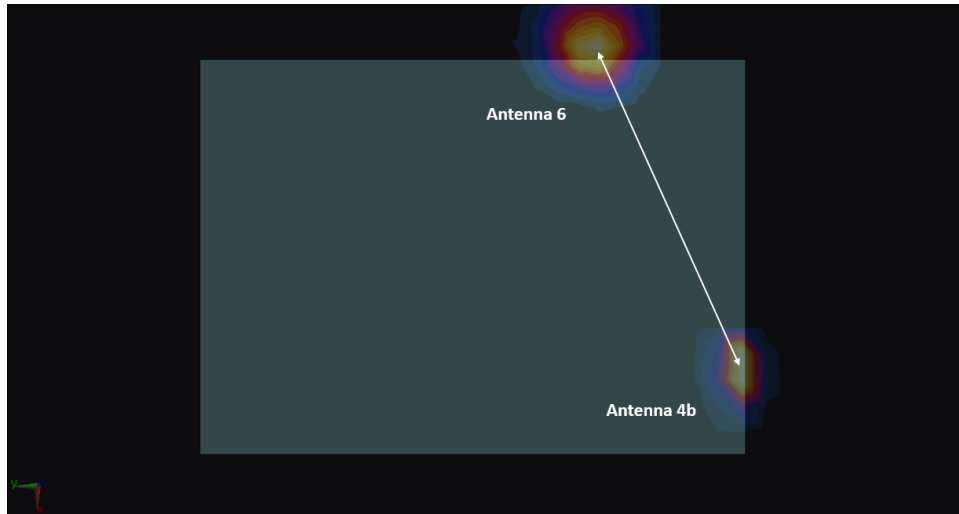


Figure 11-9
Back Side Spatial Separation for Antenna 4B and Antenna 6

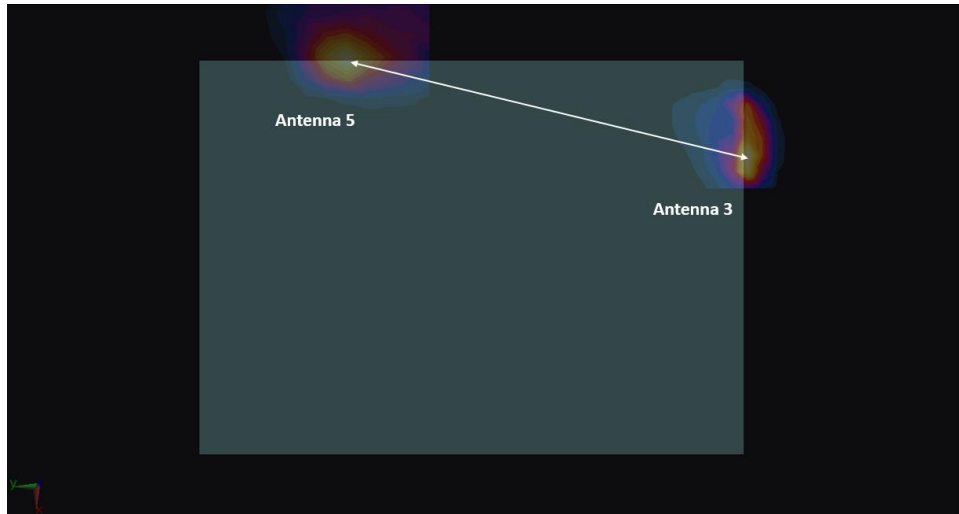


Figure 11-10
Back Side Spatial Separation for Antenna 3 and Antenna 5

FCC ID: BCGA2014	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 175 of 195

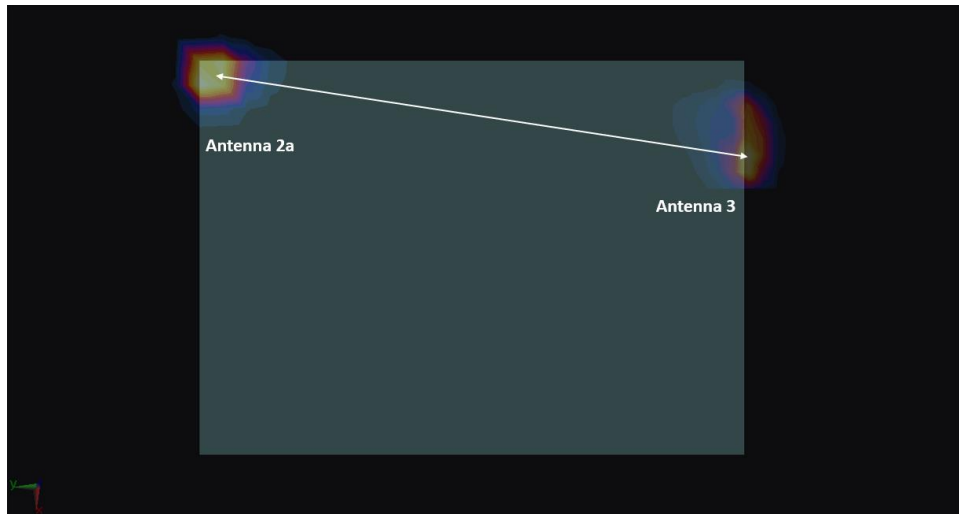


Figure 11-11
Back Side Spatial Separation for Antenna 3 and Antenna 2A

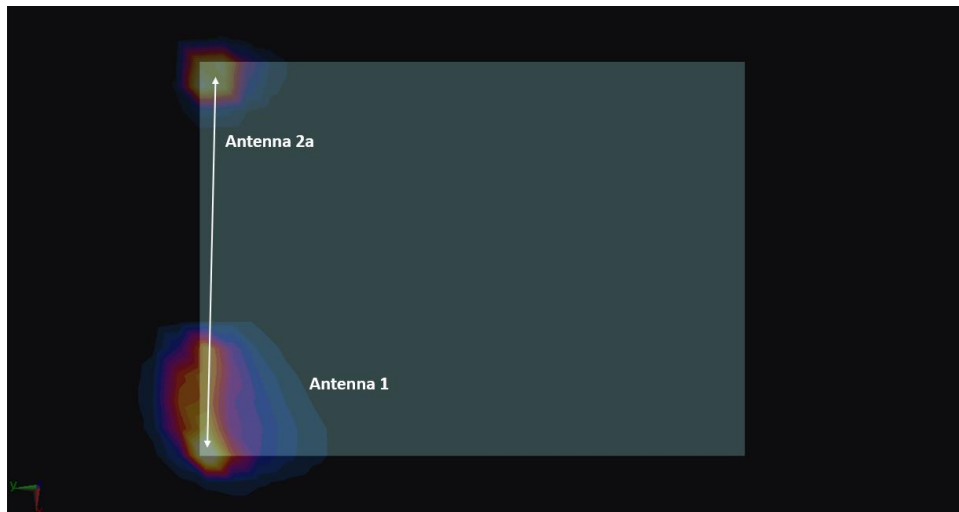


Figure 11-12
Back Side Spatial Separation for Antenna 1 and Antenna 2A

FCC ID: BCGA2014	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 176 of 195

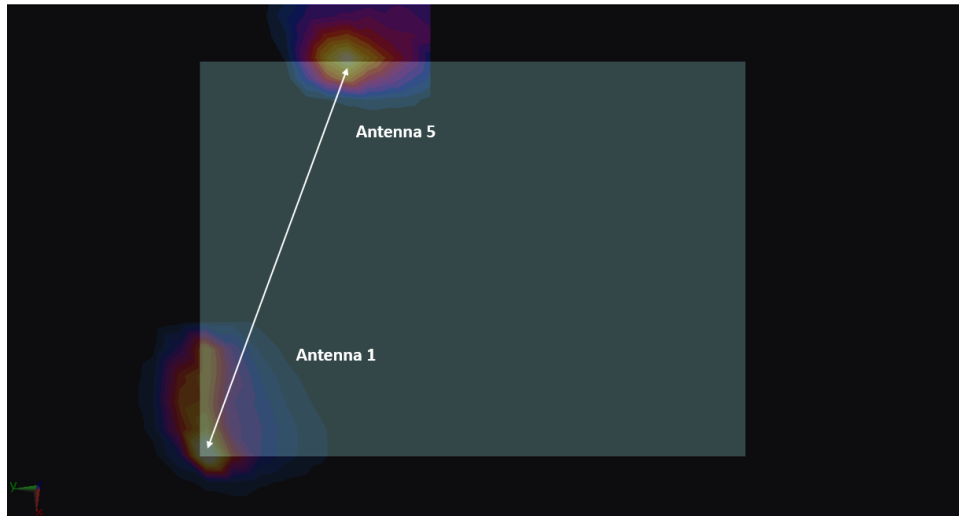


Figure 11-13
Back Side Spatial Separation for Antenna 1 and Antenna 5

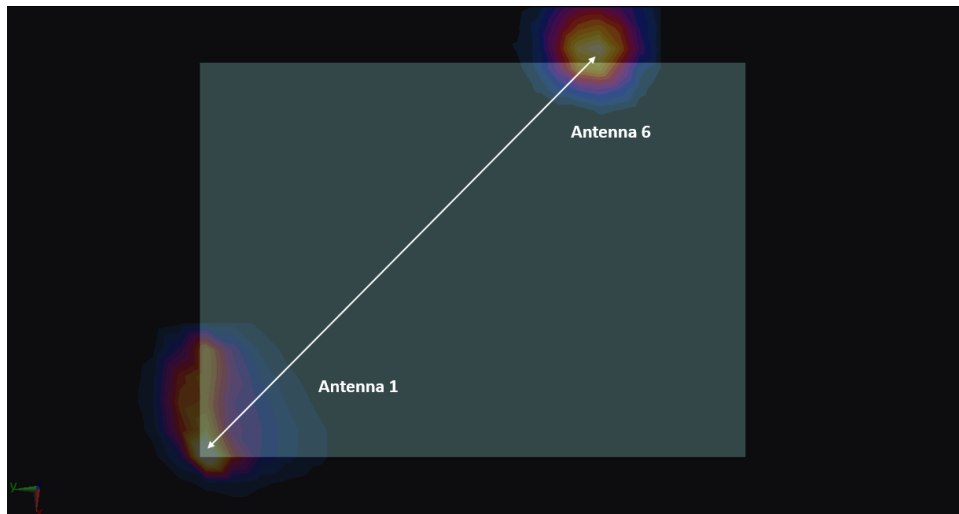


Figure 11-14
Back Side Spatial Separation for Antenna 1 and Antenna 6

FCC ID: BCGA2014	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 177 of 195

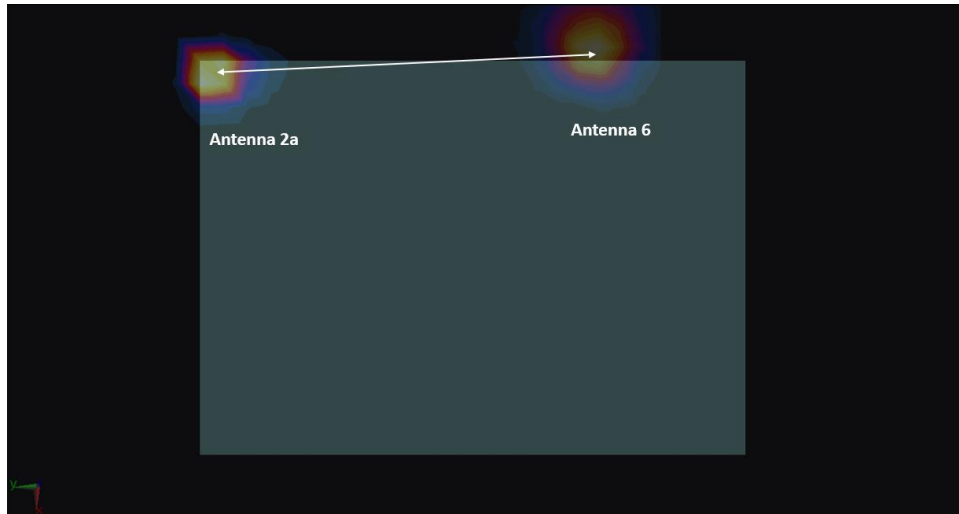


Figure 11-15
Back Side Spatial Separation for Antenna 2A and Antenna 6

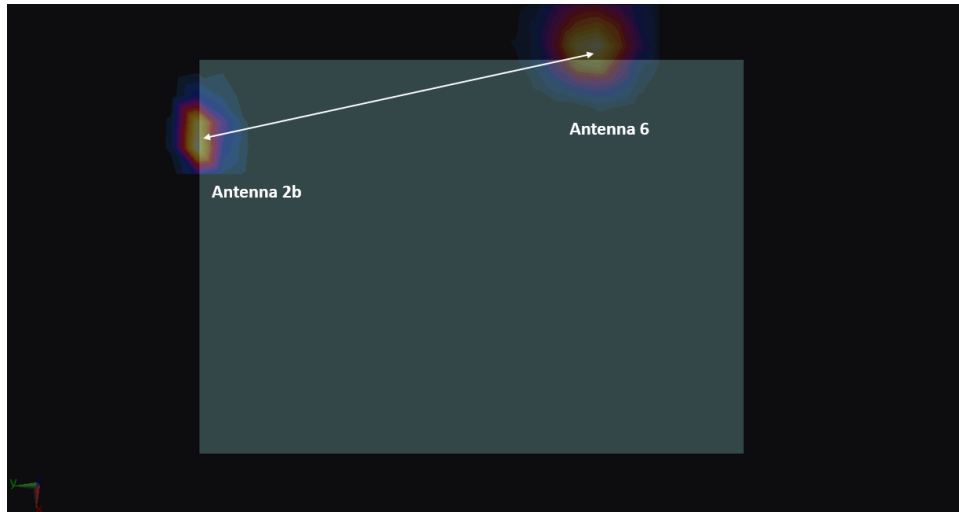


Figure 11-16
Back Side Spatial Separation for Antenna 2B and Antenna 6

FCC ID: BCGA2014	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 178 of 195

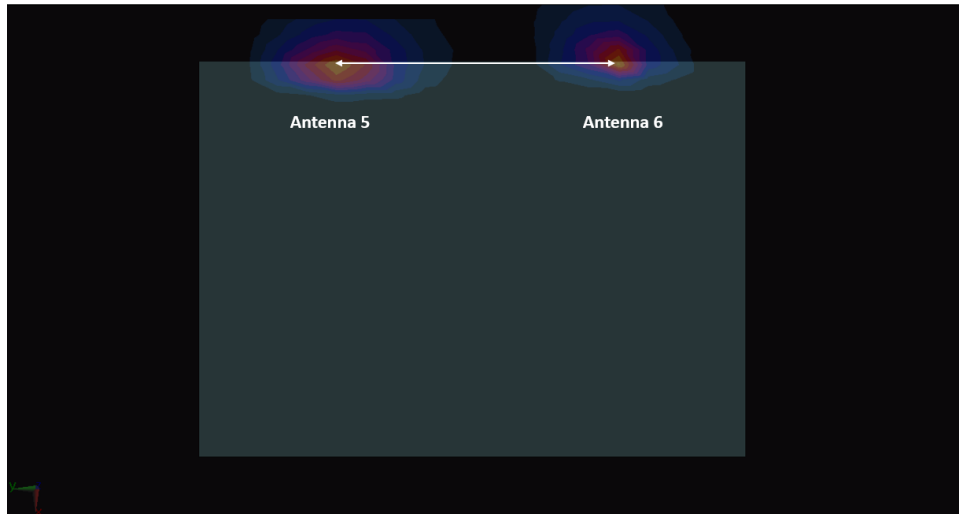


Figure 11-17
Back Side Spatial Separation for Antenna 5 and Antenna 6

11.4.2 Right Edge Spatial Separation Analysis



Figure 11-18
Right Edge Spatial Separation for Antenna 4A and Antenna 1

FCC ID: BCGA2014		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 179 of 195



Figure 11-19
Right Edge Spatial Separation for Antenna 4A and Antenna 2B

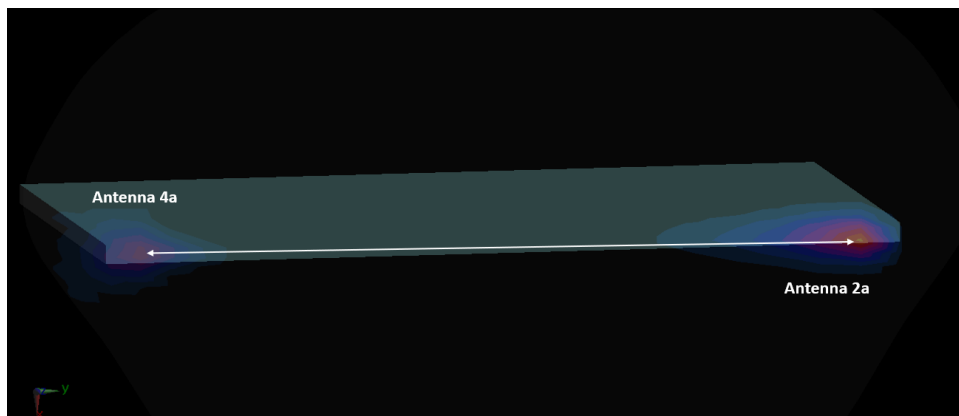


Figure 11-20
Right Edge Spatial Separation for Antenna 4A and Antenna 2A

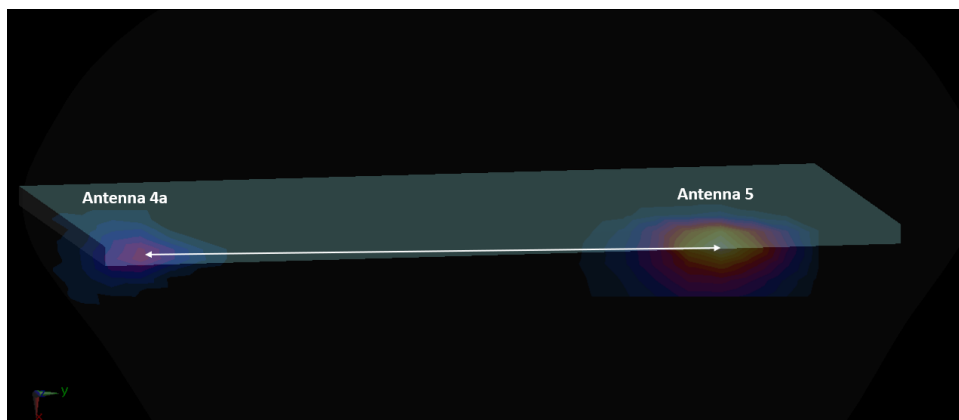


Figure 11-21
Right Edge Spatial Separation for Antenna 4A and Antenna 5

FCC ID: BCGA2014	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 180 of 195

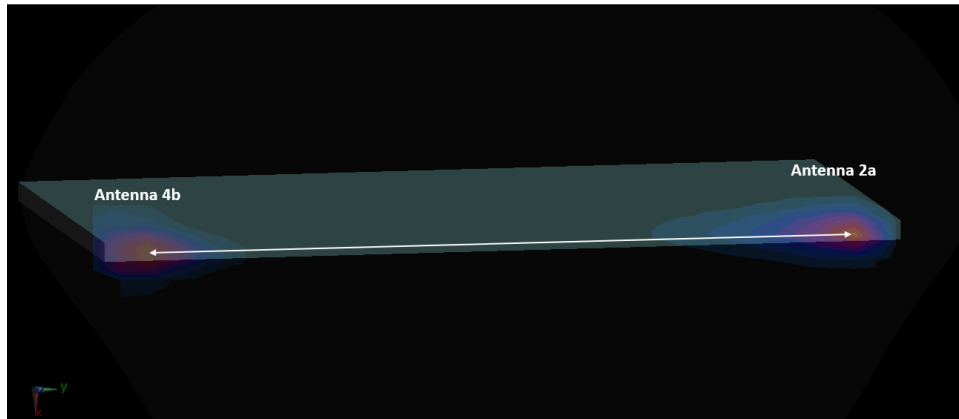


Figure 11-22
Right Edge Spatial Separation for Antenna 4B and Antenna 2A

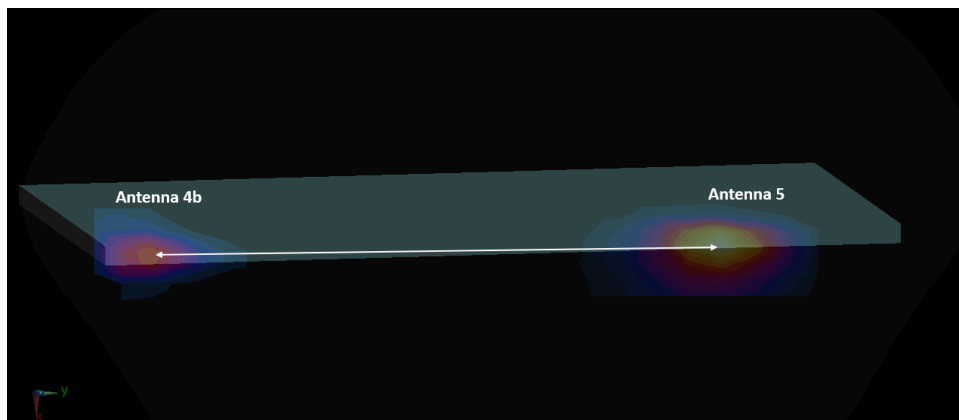


Figure 11-23
Right Edge Spatial Separation for Antenna 4B and Antenna 5

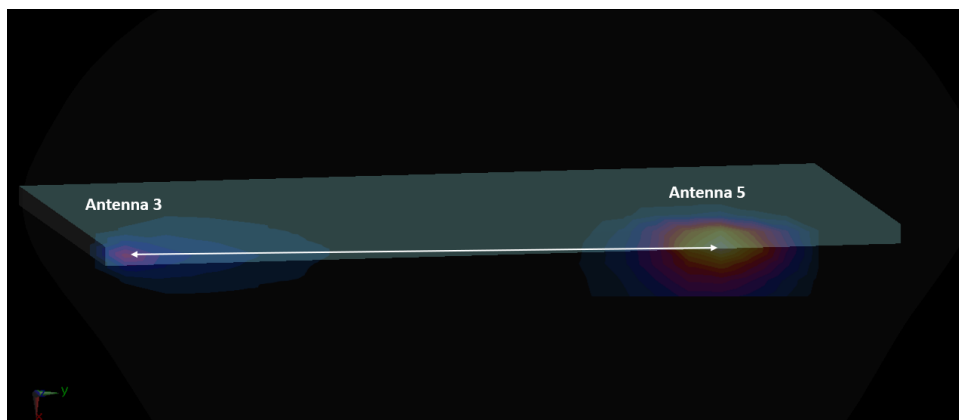


Figure 11-24
Right Edge Spatial Separation for Antenna 3 and Antenna 5

FCC ID: BCGA2014	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 181 of 195

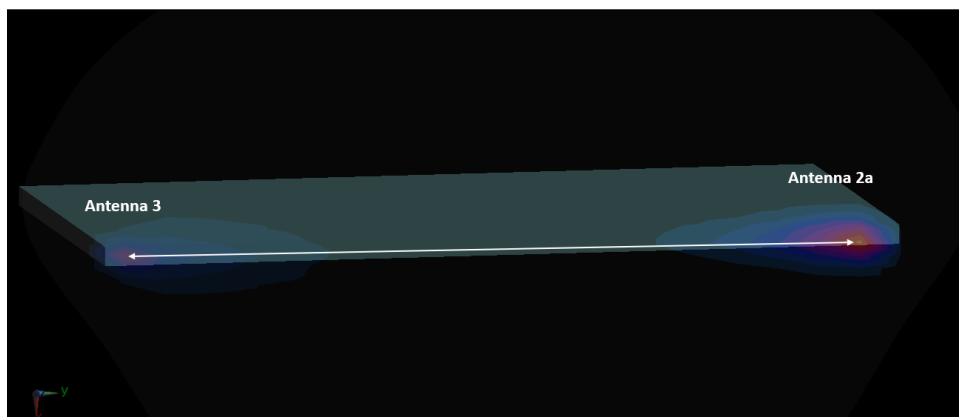


Figure 11-25
Right Edge Spatial Separation for Antenna 3 and Antenna 2A

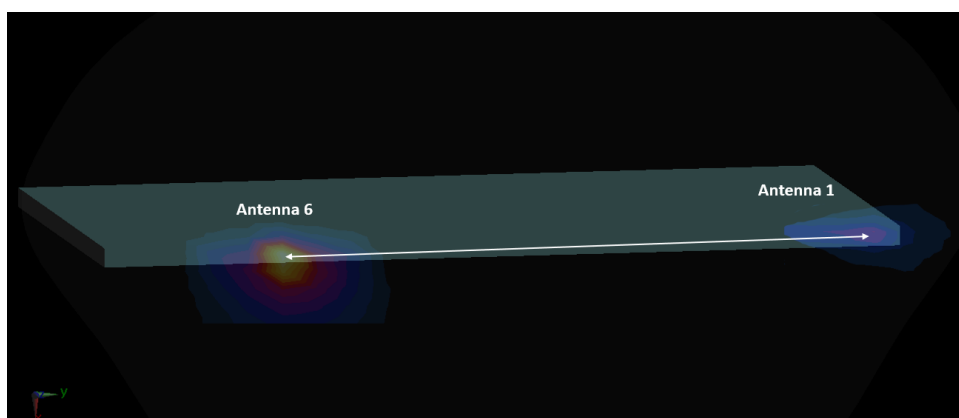


Figure 11-26
Right Edge Spatial Separation for Antenna 1 and Antenna 6

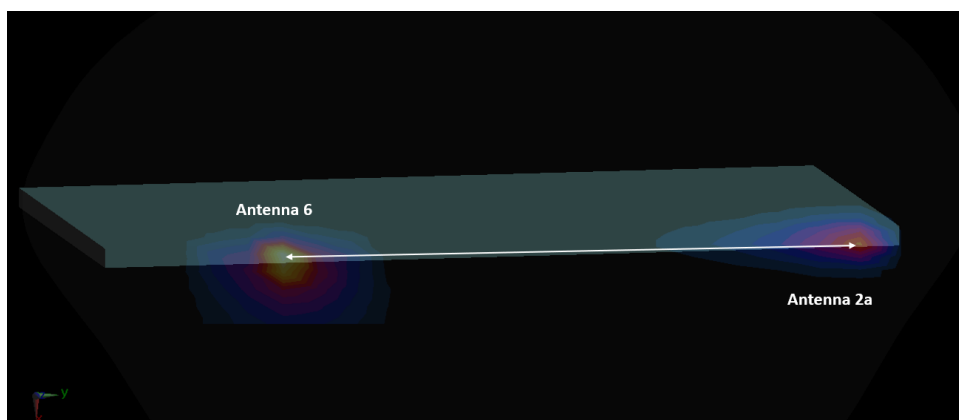


Figure 11-27
Right Edge Spatial Separation for Antenna 2A and Antenna 6

FCC ID: BCGA2014	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 182 of 195

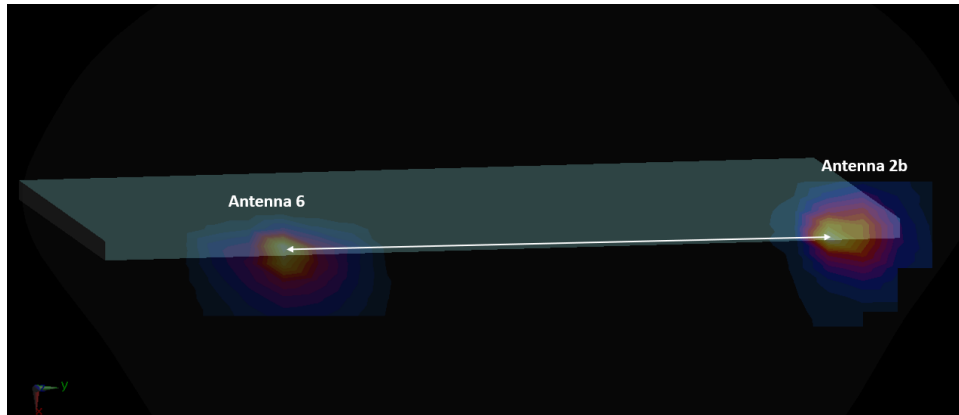


Figure 11-28
Right Edge Spatial Separation for Antenna 2B and Antenna 6

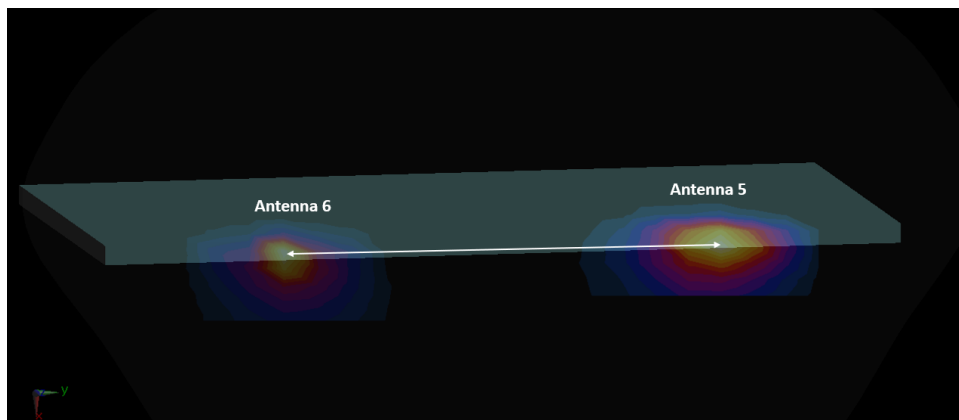


Figure 11-29
Right Edge Spatial Separation for Antenna 5 and Antenna 6

11.4.3 Left Edge Spatial Separation Analysis

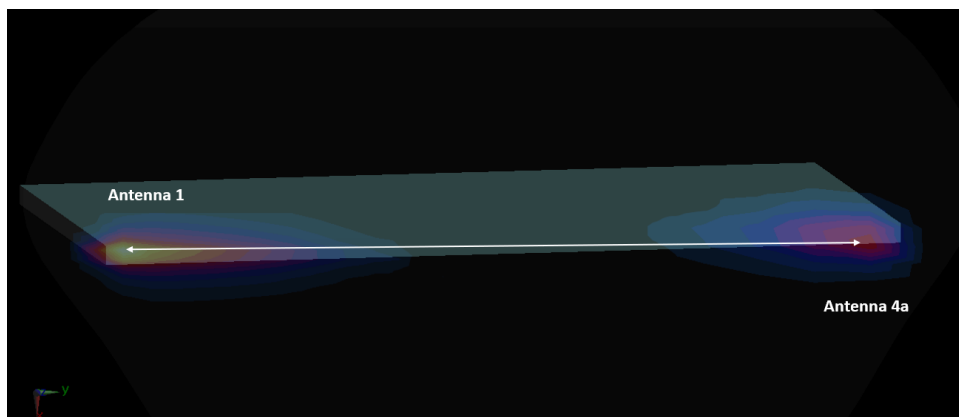


Figure 11-30
Left Edge Spatial Separation for Antenna 1 and Antenna 4A

FCC ID: BCGA2014	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 183 of 195

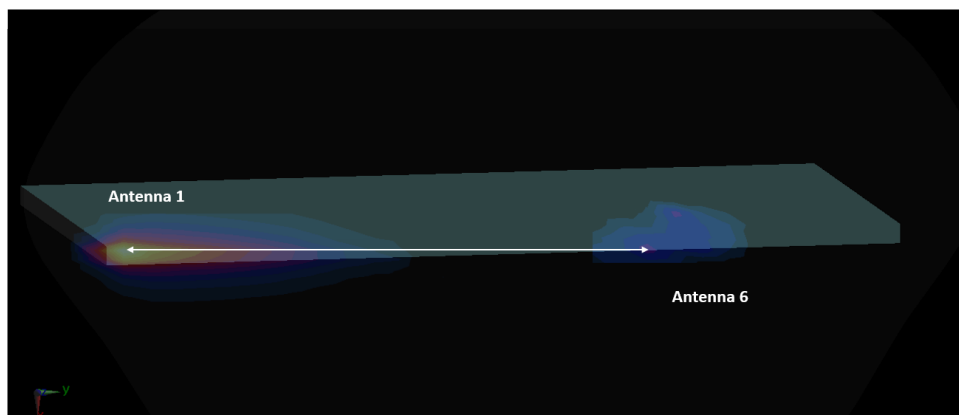


Figure 11-31
Left Edge Spatial Separation for Antenna 1 and Antenna 6

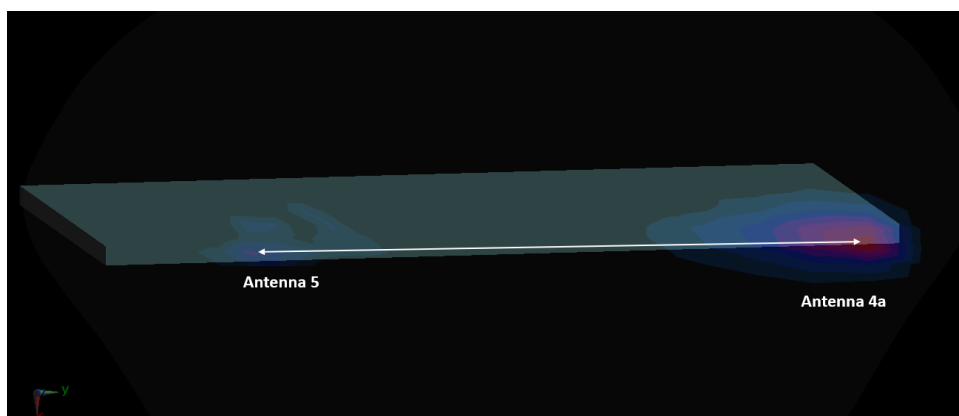


Figure 11-32
Left Edge Spatial Separation for Antenna 4A and Antenna 5



Figure 11-33
Left Edge Spatial Separation for Antenna 2A and Antenna 4A

FCC ID: BCGA2014	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 184 of 195

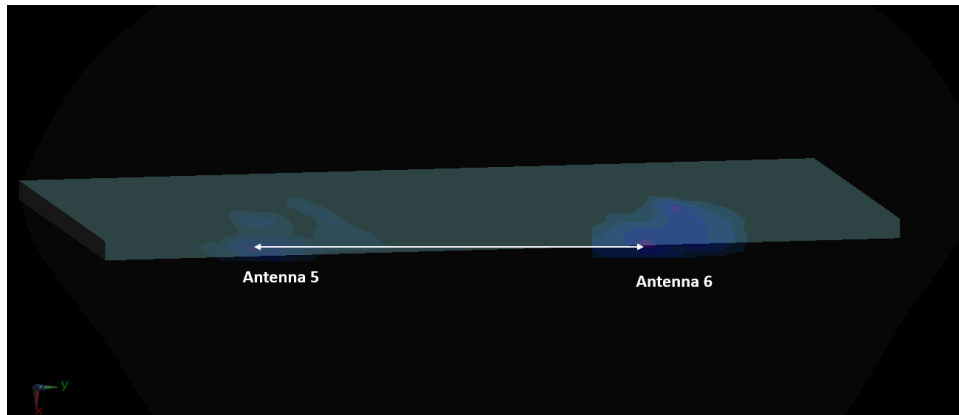


Figure 11-34
Left Edge Spatial Separation for Antenna 5 and Antenna 6

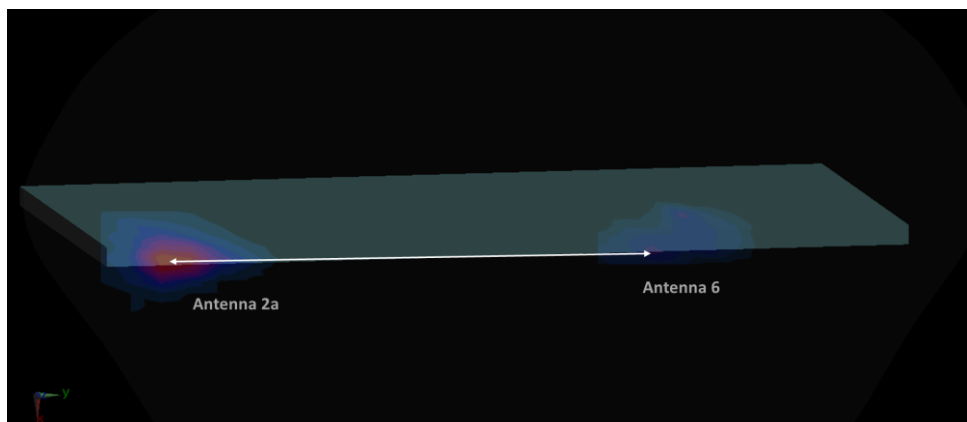


Figure 11-35
Left Edge Spatial Separation for Antenna 2A and Antenna 6

11.5 Simultaneous Transmission Conclusion

The above numerical summed SAR results and spatial separation analysis for all the worst-case simultaneous transmission conditions were below the SAR limit. Therefore, the above analysis is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore no measured volumetric simultaneous SAR summation is required per FCC KDB Publication 447498 D01v06 and IEEE 1528-2013 Section 6.3.4.1.2.

FCC ID: BCGA2014	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 185 of 195

12 SAR MEASUREMENT VARIABILITY

12.1 Measurement Variability

Per FCC KDB Publication 865664 D01v01r04, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:

- 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.
- 2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg ($\sim 10\%$ from the 1g SAR limit).
- 3) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .
- 4) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg

Table 12-1
Body SAR Measurement Variability Results

BODY VARIABILITY RESULTS															
Band	FREQUENCY		Mode	Service	Antenna Config.	Data Rate (Mbps)	Side	Spacing	Measured SAR (1g)	1st Repeated SAR (1g)	Ratio	2nd Repeated SAR (1g)	Ratio	3rd Repeated SAR (1g)	Ratio
	MHz	Ch.							(W/kg)	(W/kg)		(W/kg)		(W/kg)	
750	782.00	23230	LTE Band 13, 10 MHz Bandwidth	QPSK, 1 RB, 0 RB Offset	Ant 3	N/A	back	0 mm	1.130	0.986	1.15	N/A	N/A	N/A	N/A
850	819.00	26740	LTE Band 26 (Cell), 10 MHz Bandwidth	QPSK, 50 RB, 0 RB Offset	Ant 1	N/A	left	0 mm	1.060	0.934	1.13	N/A	N/A	N/A	N/A
1750	1752.60	1513	UMTS 1750	RMC	Ant 4B	N/A	back	0 mm	1.150	1.060	1.08	N/A	N/A	N/A	N/A
1900	1882.50	26365	LTE Band 25 (PCS), 20 MHz Bandwidth	QPSK, 50 RB, 0 RB Offset	Ant 4B	N/A	back	0 mm	1.180	1.140	1.04	N/A	N/A	N/A	N/A
2300	2310.00	27710	LTE Band 30, 10 MHz Bandwidth	QPSK, 1 RB, 0 RB Offset	Ant 4A	N/A	back	0 mm	1.160	1.110	1.05	N/A	N/A	N/A	N/A
2450	2506.00	39750	LTE Band 41, 20 MHz Bandwidth	QPSK, 1 RB, 99 RB Offset	Ant 2B	N/A	back	0 mm	1.180	1.100	1.07	N/A	N/A	N/A	N/A
2600	2535.00	21100	LTE Band 7, 20 MHz Bandwidth	QPSK, 50 RB, 0 RB Offset	Ant 2B	N/A	back	0 mm	1.150	1.070	1.07	N/A	N/A	N/A	N/A
5250	5270.00	54	802.11n, 40 MHz Bandwidth	OFDM	Ant 5	13.5	right	0 mm	0.988	0.944	1.05	N/A	N/A	N/A	N/A
5600	5610.00	122	802.11ac, 80 MHz Bandwidth	OFDM	Ant 5	29.3	right	0 mm	1.080	1.070	1.01	N/A	N/A	N/A	N/A
5750	5775.00	155	802.11ac, 80 MHz Bandwidth	OFDM	Ant 6	29.3	right	0 mm	1.110	1.050	1.06	N/A	N/A	N/A	N/A
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Body 1.6 W/kg (mW/g) averaged over 1 gram						

12.2 Measurement Uncertainty

The measured SAR was < 1.5 W/kg for all frequency bands. Therefore, per KDB Publication 865664 D01v01r04, the extended measurement uncertainty analysis per IEEE 1528-2013 was not required.

FCC ID: BCGA2014	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 186 of 195

13 ADDITIONAL TESTING PER FCC GUIDANCE


13.1 LTE Band 41 Power Class 2 and Power Class 3 Linearity

This device supports Power Class 2 and Power Class 3 operations for LTE Band 41. The highest available duty cycle for Power Class 2 operations is 43.3 % using UL-DL configuration 1. Per May 2017 TCB Workshop Notes based on the device behavior, all SAR tests were performed using Power Class 3. SAR with Power Class 2 at the highest power and available duty factor was additionally performed for the Power Class 3 configuration with the highest SAR for each exposure condition. The linearity between the Power Class 2 and Power Class 3 SAR results and the respective frame averaged powers was calculated to determine that the results were linear. Per May 2017 TCB Workshop, no additional SAR measurements were required since the linearity between power classes as < 10% and all reported SAR values were < 1.4 W/kg for 1g and < 3.5 W/kg for 10g.

LTE Band 41 SAR testing with power class 2 at the highest power and available duty factor was additionally performed for the power class 3 configuration with the highest SAR for each exposure condition.

Table 13-1
LTE Band 41 Body Linearity Data – Ant 4a


	LTE Band 41 PC3	LTE Band 41 PC2
Maximum Allowed Output Power (dBm)	17.3	17.3
Measured Output Power (dBm)	17.29	17.3
Measured SAR (W/kg)	1.18	0.771
Measured Power (mW)	53.58	53.70
Duty Cycle	63.3%	43.3%
Frame Averaged Output Power (mW)	33.92	23.25
% deviation from expected linearity		-4.70%

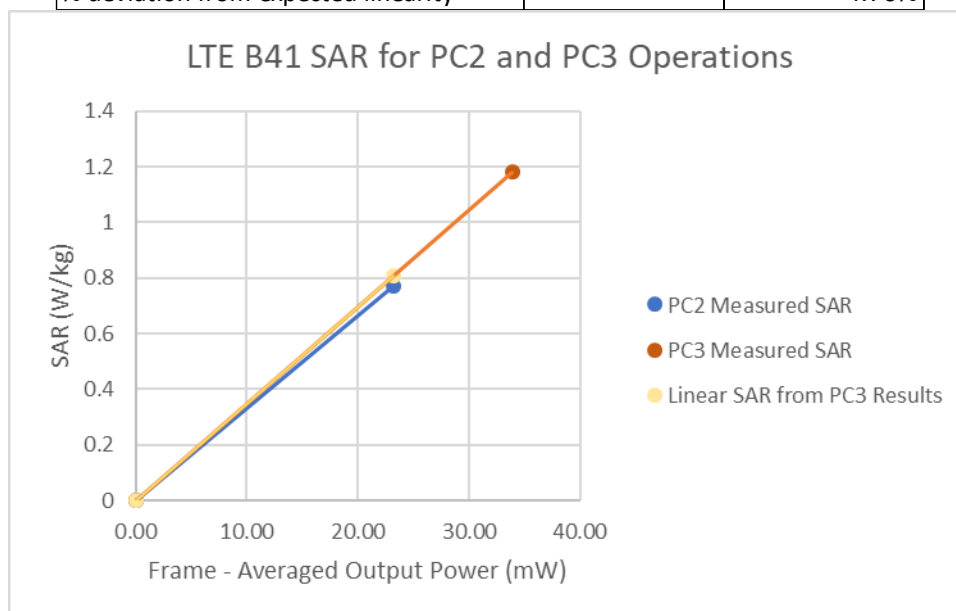

FCC ID: BCGA2014		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 187 of 195

Table 13-2
LTE Band 41 Body Linearity Data – Ant 4b


	LTE Band 41 PC3	LTE Band 41 PC2
Maximum Allowed Output Power (dBm)	16.2	16.2
Measured Output Power (dBm)	15.84	15.84
Measured SAR (W/kg)	1.09	0.781
Measured Power (mW)	38.37	38.37
Duty Cycle	63.3%	43.3%
Frame Averaged Output Power (mW)	24.29	16.61
% deviation from expected linearity		4.75%

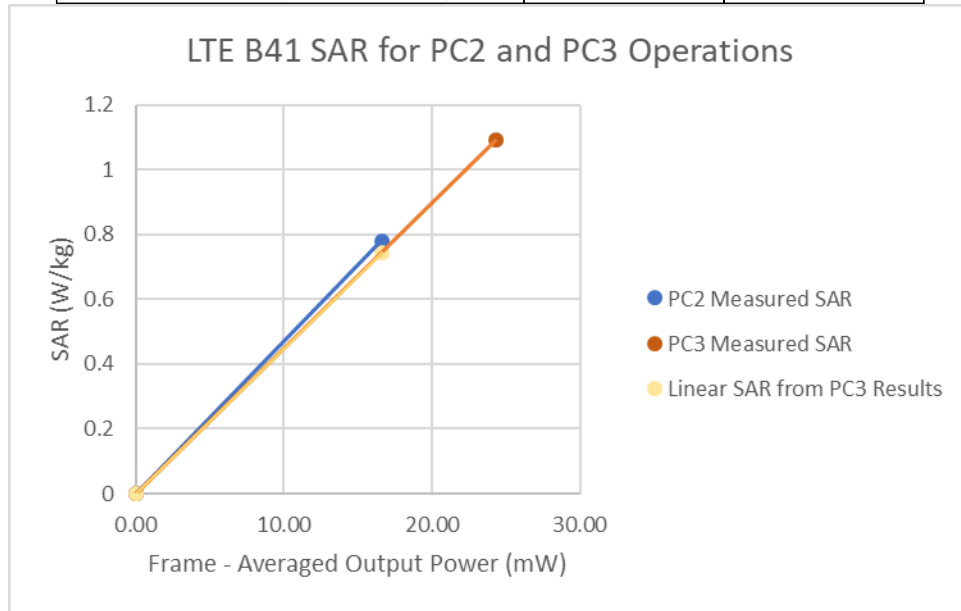

FCC ID: BCGA2014		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 188 of 195

Table 13-3
LTE Band 41 Body Linearity Data – Ant 2a


	LTE Band 41 PC3	LTE Band 41 PC2
Maximum Allowed Output Power (dBm)	17.5	17.5
Measured Output Power (dBm)	17.32	17.27
Measured SAR (W/kg)	1.13	0.757
Measured Power (mW)	53.95	53.33
Duty Cycle	63.3%	43.3%
Frame Averaged Output Power (mW)	34.15	23.09
% deviation from expected linearity		-0.93%

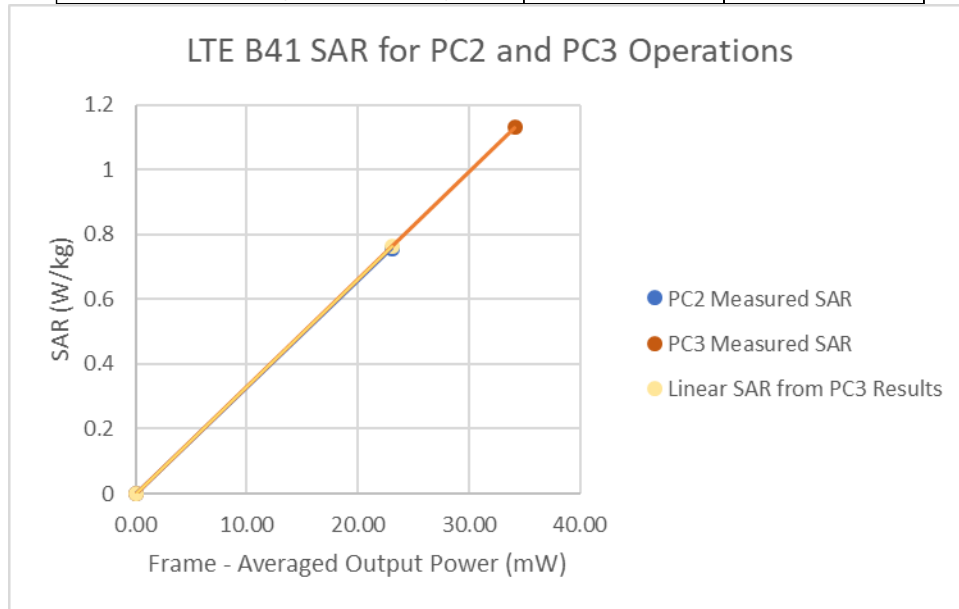

FCC ID: BCGA2014		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 189 of 195

Table 13-4
LTE Band 41 Body Linearity Data – Ant 2b

	LTE Band 41 PC3	LTE Band 41 PC2
Maximum Allowed Output Power (dBm)	15.6	15.6
Measured Output Power (dBm)	15.58	15.6
Measured SAR (W/kg)	1.18	0.733
Measured Power (mW)	36.14	36.31
Duty Cycle	63.3%	43.3%
Frame Averaged Output Power (mW)	22.88	15.72
% deviation from expected linearity		-9.61%

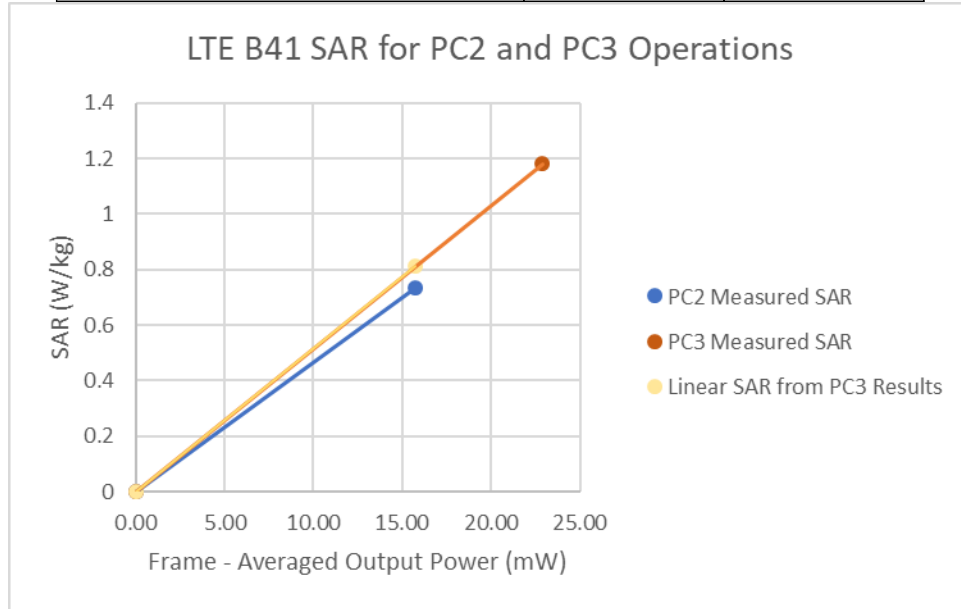

FCC ID: BCGA2014		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 190 of 195

14 EQUIPMENT LIST

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	8753ES	S-Parameter Network Analyzer	9/14/2017	Annual	9/14/2018	US39170118
Agilent	8753ES	Network Analyzer	2/21/2018	Annual	2/21/2019	MY40001472
Agilent	E4438C	ESG Vector Signal Generator	6/22/2018	Annual	6/22/2019	MYS3401181
Agilent	E5515C	Wireless Communications Test Set	2/28/2018	Biennial	2/28/2020	GB41450275
Agilent	N5182A	MXG Vector Signal Generator	6/15/2018	Annual	6/15/2019	MY47420837
Agilent	N9020A	MXA Signal Analyzer	1/24/2018	Annual	1/24/2019	US46470561
Agilent	N4010A	Wireless Connectivity Test Set	N/A	N/A	N/A	GB46170464
Amplifier Research	150A100C	Amplifier	CBT	N/A	CBT	350132
Amplifier Research	1551G6	Amplifier	CBT	N/A	CBT	343972
Amplifier Research	1551G6	Amplifier	CBT	N/A	CBT	343971
Anritsu	MA24106A	USB Power Sensor	6/5/2018	Annual	6/5/2019	1248508
Anritsu	MA24106A	USB Power Sensor	1/19/2018	Annual	1/19/2019	1520503
Anritsu	MA24106A	USB Power Sensor	1/19/2018	Annual	1/19/2019	1520501
Anritsu	MA2411B	Pulse Power Sensor	11/15/2017	Annual	11/15/2018	1339007
Anritsu	ML2496A	Power Meter	10/9/2017	Annual	10/9/2018	1138001
Anritsu	MT8820C	Radio Communication Analyzer	6/27/2018	Annual	6/27/2019	6201240328
Anritsu	MT8821C	Radio Communication Analyzer	7/24/2018	Annual	7/24/2019	6201664756
Control Company	4040	Digital Thermometer	4/7/2017	Biennial	4/7/2019	150286298
Control Company	4040	Digital Thermometer	2/28/2018	Biennial	2/28/2020	150761911
Control Company	4352	Ultra Long Stem Thermometer	2/14/2017	Biennial	2/14/2019	170112507
Control Company	4352	Ultra Long Stem Thermometer	5/2/2017	Biennial	5/2/2019	170330160
Control Company	4352	Ultra Long Stem Thermometer	5/2/2017	Biennial	5/2/2019	170330158
MCL	BW-N6W5+	6dB Attenuator	CBT	N/A	CBT	1139
Mini-Circuits	VLF-6000+	Low Pass Filter	CBT	N/A	CBT	N/A
Mini-Circuits	BW-N20W5+	DC to 18 GHz Precision Fixed 20 dB Attenuator	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-1200+	Low Pass Filter DC to 1000 MHz	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-2950+	Low Pass Filter DC to 2700 MHz	CBT	N/A	CBT	N/A
Mitutoyo	CD-6"CSX	Digital Caliper	4/18/2018	Biennial	4/18/2020	13264165
Narda	4014C-6	4 - 8 GHz SMA 6 dB Directional Coupler	CBT	N/A	CBT	N/A
Narda	4772-3	Attenuator (3dB)	CBT	N/A	CBT	9406
Narda	BW-S3W2	Attenuator (3dB)	CBT	N/A	CBT	120
Pasternack	PE2208-6	Bidirectional Coupler	CBT	N/A	CBT	N/A
Pasternack	PE2209-10	Bidirectional Coupler	CBT	N/A	CBT	N/A
Pasternack	PE5011-1	Torque Wrench	7/19/2017	Biennial	7/19/2019	N/A
Pasternack	PE5011-1	Torque Wrench	7/19/2017	Biennial	7/19/2019	N/A
Pasternack	PE5011-1	Torque Wrench	7/19/2017	Biennial	7/19/2019	N/A
Pasternack	PE5011-1	Torque Wrench	7/19/2017	Biennial	7/19/2019	N/A
Rohde & Schwarz	CMW500	Radio Communication Tester	7/5/2018	Annual	7/5/2019	106578
Rohde & Schwarz	CMW500	Radio Communication Tester	4/20/2018	Annual	4/20/2019	128635
Rohde & Schwarz	CMW500	Radio Communication Tester	7/5/2018	Annual	7/5/2019	145663
Rohde & Schwarz	FSP-7	Spectrum Analyzer	2/7/2018	Annual	2/7/2019	100288
SPEAG	D750V3	750 MHz SAR Dipole	5/18/2018	Annual	5/18/2019	1034
SPEAG	D750V3	750 MHz SAR Dipole	6/13/2017	Biennial	6/13/2019	1057
SPEAG	D835V2	835 MHz SAR Dipole	5/18/2018	Annual	5/18/2019	4d180
SPEAG	D850V2	850 MHz SAR Dipole	9/8/2017	Biennial	9/8/2019	1010
SPEAG	D1750V2	1750 MHz SAR Dipole	6/9/2017	Biennial	6/9/2019	1083
SPEAG	D1900V2	1900 MHz SAR Dipole	9/7/2017	Biennial	9/7/2019	5d181
SPEAG	D1900V2	1900 MHz SAR Dipole	8/16/2017	Biennial	8/16/2019	5d180
SPEAG	D2300V2	2300 MHz SAR Dipole	3/7/2018	Annual	3/7/2019	1038
SPEAG	D2450V2	2450 MHz SAR Dipole	5/16/2018	Annual	5/16/2019	945
SPEAG	D2450V2	2450 MHz SAR Dipole	9/11/2017	Biennial	9/11/2019	921
SPEAG	D2450V2	2450 MHz SAR Dipole	6/7/2017	Biennial	6/7/2019	750
SPEAG	D2600V2	2600 MHz SAR Dipole	6/19/2018	Annual	6/19/2019	1009
SPEAG	D5GHZV2	5 GHz SAR Dipole	3/13/2018	Annual	3/13/2019	1123
SPEAG	DAE4	Dasy Data Acquisition Electronics	2/8/2018	Annual	2/8/2019	1403
SPEAG	DAE4	Dasy Data Acquisition Electronics	6/18/2018	Annual	6/18/2019	701
SPEAG	DAE4	Dasy Data Acquisition Electronics	1/18/2018	Annual	1/18/2019	793
SPEAG	DAE4	Dasy Data Acquisition Electronics	1/26/2018	Annual	1/26/2019	1532
SPEAG	DAE4	Dasy Data Acquisition Electronics	4/12/2018	Annual	4/12/2019	501
SPEAG	DAE4	Dasy Data Acquisition Electronics	3/7/2018	Annual	3/7/2019	604
SPEAG	DAE4	Dasy Data Acquisition Electronics	1/26/2018	Annual	1/26/2019	1533
SPEAG	DAK-3.5	Dielectric Assessment Kit	5/15/2018	Annual	5/15/2019	1070
SPEAG	ES3DV3	SAR Probe	2/13/2018	Annual	2/13/2019	3329
SPEAG	ES3DV3	SAR Probe	4/12/2018	Annual	4/12/2019	3275
SPEAG	EX3DV4	SAR Probe	7/20/2018	Annual	7/20/2019	7416
SPEAG	EX3DV4	SAR Probe	3/16/2018	Annual	3/16/2019	3837
SPEAG	EX3DV4	SAR Probe	1/26/2018	Annual	1/26/2019	7490
SPEAG	ES3DV3	SAR Probe	9/18/2017	Annual	9/18/2018	3287
SPEAG	ES3DV2	SAR Probe	6/22/2018	Annual	6/22/2019	3022

Note: CBT (Calibrated Before Testing). Prior to testing, the measurement paths containing a cable, amplifier, attenuator, coupler or filter were connected to a calibrated source (i.e. a signal generator) to determine the losses of the measurement path. The power meter offset was then adjusted to compensate for the measurement system losses. This level offset is stored within the power meter before measurements are made. This calibration verification procedure applies to the system verification and output power measurements. The calibrated reading is then taken directly from the power meter after compensation of the losses for all final power measurements. Each equipment item was used solely within its respective calibration period.

FCC ID: BCGA2014		SAR EVALUATION REPORT	Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 191 of 195

15 MEASUREMENT UNCERTAINTIES

a	c	d	e= f(d,k)	f	g	h = c x f/e	i = c x g/e	k
Uncertainty Component	Tol. (± %)	Prob. Dist.	Div.	c _i 1gm	c _i 10 gms	1gm u _i (± %)	10gms u _i (± %)	v _i
Measurement System								
Probe Calibration	6.55	N	1	1.0	1.0	6.6	6.6	∞
Axial Isotropy	0.25	N	1	0.7	0.7	0.2	0.2	∞
Hemishperical Isotropy	1.3	N	1	0.7	0.7	0.9	0.9	∞
Boundary Effect	2.0	R	1.73	1.0	1.0	1.2	1.2	∞
Linearity	0.3	N	1	1.0	1.0	0.3	0.3	∞
System Detection Limits	0.25	R	1.73	1.0	1.0	0.1	0.1	∞
Readout Electronics	0.3	N	1	1.0	1.0	0.3	0.3	∞
Response Time	0.8	R	1.73	1.0	1.0	0.5	0.5	∞
Integration Time	2.6	R	1.73	1.0	1.0	1.5	1.5	∞
RF Ambient Conditions - Noise	3.0	R	1.73	1.0	1.0	1.7	1.7	∞
RF Ambient Conditions - Reflections	3.0	R	1.73	1.0	1.0	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	0.4	R	1.73	1.0	1.0	0.2	0.2	∞
Probe Positioning w/ respect to Phantom	6.7	R	1.73	1.0	1.0	3.9	3.9	∞
Extrapolation, Interpolation & Integration algorithms for Max. SAR Evaluation	4.0	R	1.73	1.0	1.0	2.3	2.3	∞
Test Sample Related								
Test Sample Positioning	2.7	N	1	1.0	1.0	2.7	2.7	35
Device Holder Uncertainty	1.67	N	1	1.0	1.0	1.7	1.7	5
Output Power Variation - SAR drift measurement	5.0	R	1.73	1.0	1.0	2.9	2.9	∞
SAR Scaling	0.0	R	1.73	1.0	1.0	0.0	0.0	∞
Phantom & Tissue Parameters								
Phantom Uncertainty (Shape & Thickness tolerances)	7.6	R	1.73	1.0	1.0	4.4	4.4	∞
Liquid Conductivity - measurement uncertainty	4.2	N	1	0.78	0.71	3.3	3.0	10
Liquid Permittivity - measurement uncertainty	4.1	N	1	0.23	0.26	1.0	1.1	10
Liquid Conductivity - Temperature Uncertainty	3.4	R	1.73	0.78	0.71	1.5	1.4	∞
Liquid Permittivity - Temperature Uncertainty	0.6	R	1.73	0.23	0.26	0.1	0.1	∞
Liquid Conductivity - deviation from target values	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Permittivity - deviation from target values	5.0	R	1.73	0.60	0.49	1.7	1.4	∞
Combined Standard Uncertainty (k=1)	RSS					11.5	11.3	60
Expanded Uncertainty (95% CONFIDENCE LEVEL)	k=2					23.0	22.6	

FCC ID: BCGA2014	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 192 of 195

16 CONCLUSION

16.1 Measurement Conclusion

The SAR evaluation indicates that the EUT complies with the RF radiation exposure limits of the FCC and Innovation, Science, and Economic Development Canada, with respect to all parameters subject to this test. These measurements were taken to simulate the RF effects of RF exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are very complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because various factors may interact with one another to vary the specific biological outcome of an exposure to electromagnetic fields, any protection guide should consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables. [3]

FCC ID: BCGA2014	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 193 of 195

17 REFERENCES

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, 2006.
- [3] ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, Sept. 1992.
- [4] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.
- [5] IEEE Standards Coordinating Committee 39 –Standards Coordinating Committee 34 – IEEE Std. 1528-2013, IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.
- [6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for RadioFrequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. 1 -124.
- [9] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [10] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [13] G. Hartsgrrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectromagnetics, Canada: 1987, pp. 29-36.
- [14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [15] W. Gander, Computermathematick, Birkhaeuser, Basel, 1992.
- [16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.
- [17] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.

FCC ID: BCGA2014	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 194 of 195

- [18] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.
- [19] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.
- [20] IEC 62209-1, Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Part 1: Devices used next to the ear (Frequency range of 300 MHz to 6 GHz), July 2016.
- [21] Innovation, Science, Economic Development Canada RSS-102 Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands) Issue 5, March 2015.
- [22] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2015
- [23] FCC SAR Test Procedures for 2G-3G Devices, Mobile Hotspot and UMPC Devices KDB Publications 941225, D01-D07
- [24] SAR Measurement Guidance for IEEE 802.11 Transmitters, KDB Publication 248227 D01
- [25] FCC SAR Considerations for Handsets with Multiple Transmitters and Antennas, KDB Publications 648474 D03-D04
- [26] FCC SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers, FCC KDB Publication 616217 D04
- [27] FCC SAR Measurement and Reporting Requirements for 100MHz – 6 GHz, KDB Publications 865664 D01-D02
- [28] FCC General RF Exposure Guidance and SAR Procedures for Dongles, KDB Publication 447498, D01-D02
- [29] Anexo à Resolução No. 533, de 10 de Setembro de 2009.
- [30] IEC 62209-2, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz), Mar. 2010.

FCC ID: BCGA2014	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1C1806050011-01-R2.BCG	Test Dates: 09/06/18-09/21/18	DUT Type: Tablet Device	Page 195 of 195

APPENDIX A: SAR TEST DATA

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCGA2014; Type: Tablet Device; Serial: DLXX702DKYD1

Communication System: UID 0, GSM GPRS; 2 Tx slots; Frequency: 824.2 MHz; Duty Cycle: 1:4.15

Medium: 835 Body Medium parameters used (interpolated):

$f = 824.2 \text{ MHz}$; $\sigma = 0.984 \text{ S/m}$; $\epsilon_r = 53.858$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 09-21-2018; Ambient Temp: 23.3°C; Tissue Temp: 21.2°C

Probe: EX3DV4 - SN7490; ConvF(10.3, 10.3, 10.3); Calibrated: 1/26/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1532; Calibrated: 1/26/2018

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1936

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: GPRS 850 Ant 3, Body SAR, Back side, Low.ch, 2 Tx Slots


Area Scan (9x19x1): Measurement grid: dx=10mm, dy=15mm

Zoom Scan (6x7x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.52 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.49 W/kg

SAR(1 g) = 0.751 W/kg; SAR(10 g) = 0.402 W/kg

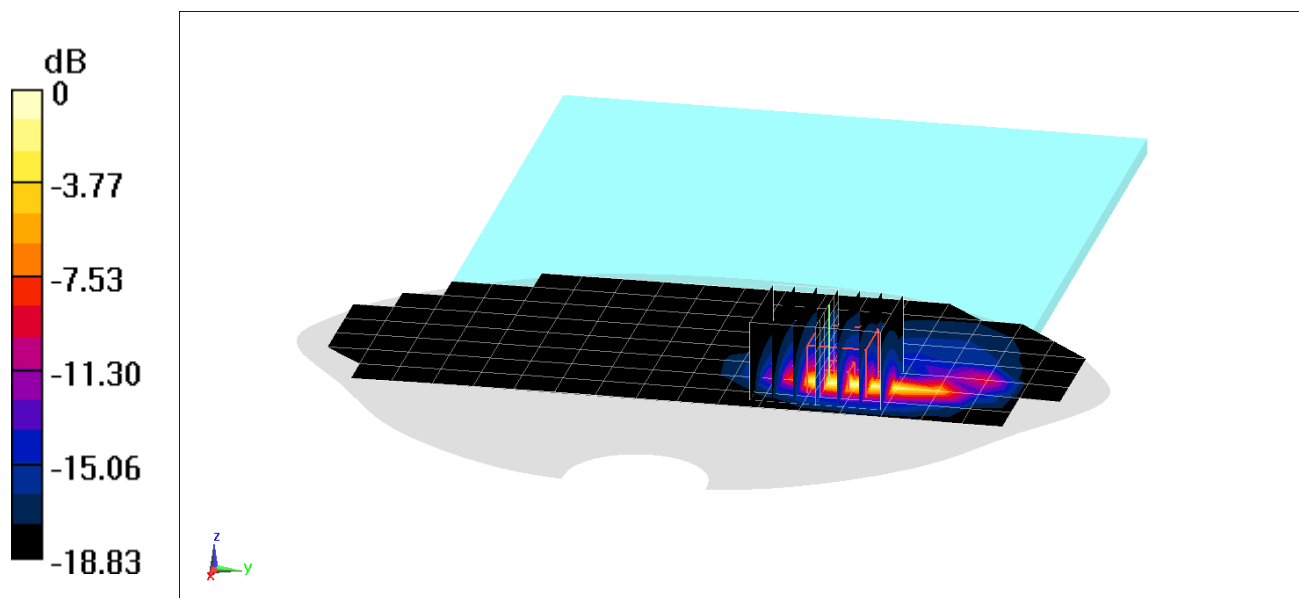

0 dB = 1.25 W/kg = 0.97 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCGA2014; Type: Tablet Device; Serial: DLXX702DKYD1

Communication System: UID 0, GSM GPRS; 2 Tx slots; Frequency: 1909.8 MHz; Duty Cycle: 1:4.15

Medium: 1900 Body Medium parameters used:

$f = 1910 \text{ MHz}$; $\sigma = 1.516 \text{ S/m}$; $\epsilon_r = 51.773$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 09-18-2018; Ambient Temp: 21.8°C; Tissue Temp: 21.7°C

Probe: ES3DV3 - SN3275; ConvF(4.85, 4.85, 4.85); Calibrated: 4/12/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn501; Calibrated: 4/12/2018

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CD; Serial: 1736

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: GPRS 1900 Ant 4B, Body SAR, Back side, High.ch, 2 Tx Slots



Area Scan (9x19x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 25.84 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 1.88 W/kg

SAR(1 g) = 0.776 W/kg; SAR(10 g) = 0.322 W/kg

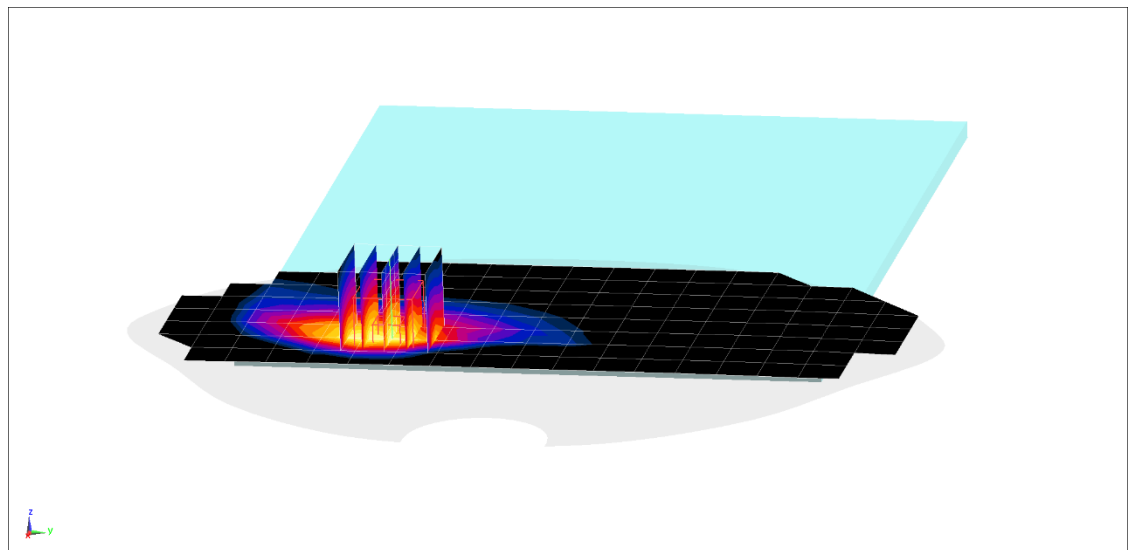

0 dB = 1.12 W/kg = 0.49 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCGA2014; Type: Tablet Device; Serial: DLXX7032KYD1

Communication System: UID 0, UMTS; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used (interpolated):

$f = 826.4 \text{ MHz}$; $\sigma = 0.991 \text{ S/m}$; $\epsilon_r = 54.61$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 09-19-2018; Ambient Temp: 23.3°C; Tissue Temp: 21.2°C

Probe: EX3DV4 - SN7490; ConvF(10.3, 10.3, 10.3); Calibrated: 1/26/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1532; Calibrated: 1/26/2018

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1936

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: UMTS 850 Ant 3, Body SAR, Right Edge, Low.ch


Area Scan (10x21x1): Measurement grid: dx=5mm, dy=15mm

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 34.38 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 3.34 W/kg

SAR(1 g) = 0.934 W/kg; SAR(10 g) = 0.381 W/kg

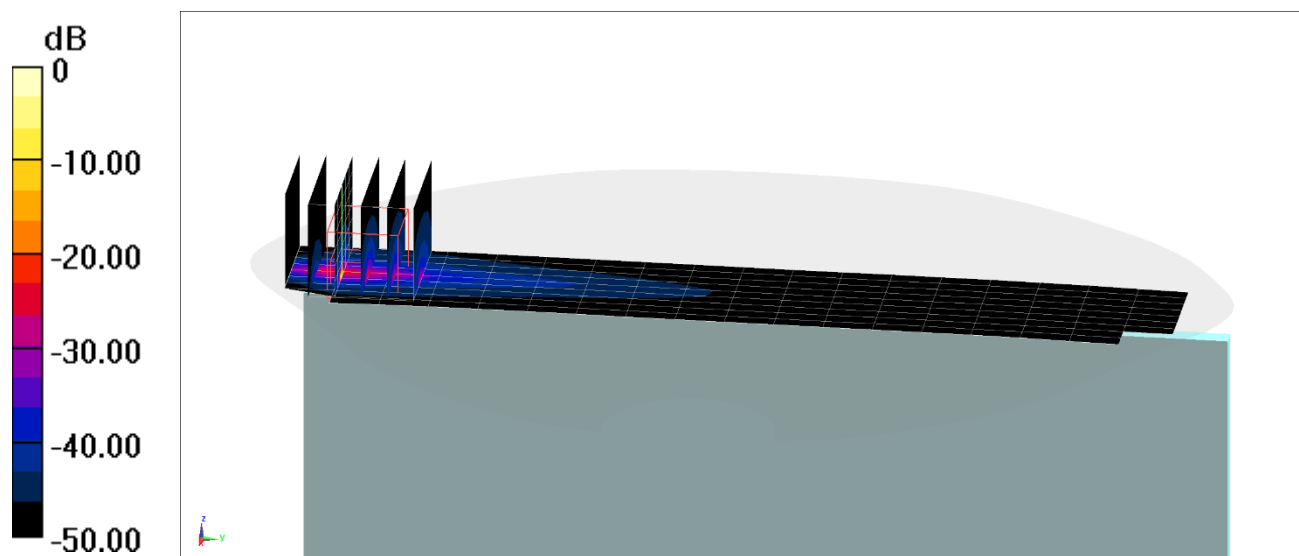

0 dB = 1.63 W/kg = 2.12 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCGA2014; Type: Tablet Device; Serial: DLXX702RKYD1

Communication System: UID 0, UMTS; Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used (interpolated):

$f = 1752.6 \text{ MHz}$; $\sigma = 1.548 \text{ S/m}$; $\epsilon_r = 51.367$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 09-17-2018; Ambient Temp: 23.3°C; Tissue Temp: 21.0°C

Probe: ES3DV3 - SN3287; ConvF(5.19, 5.19, 5.19); Calibrated: 9/18/2017;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1533; Calibrated: 1/26/2018

Phantom: Twin-SAM V8.0_Left; Type: QD 000 P41 AA; Serial: 1935

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: UMTS 1750 Ant 4B, Body SAR, Back side, High.ch


Area Scan (9x19x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 29.26 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 2.70 W/kg

SAR(1 g) = 1.15 W/kg; SAR(10 g) = 0.495 W/kg

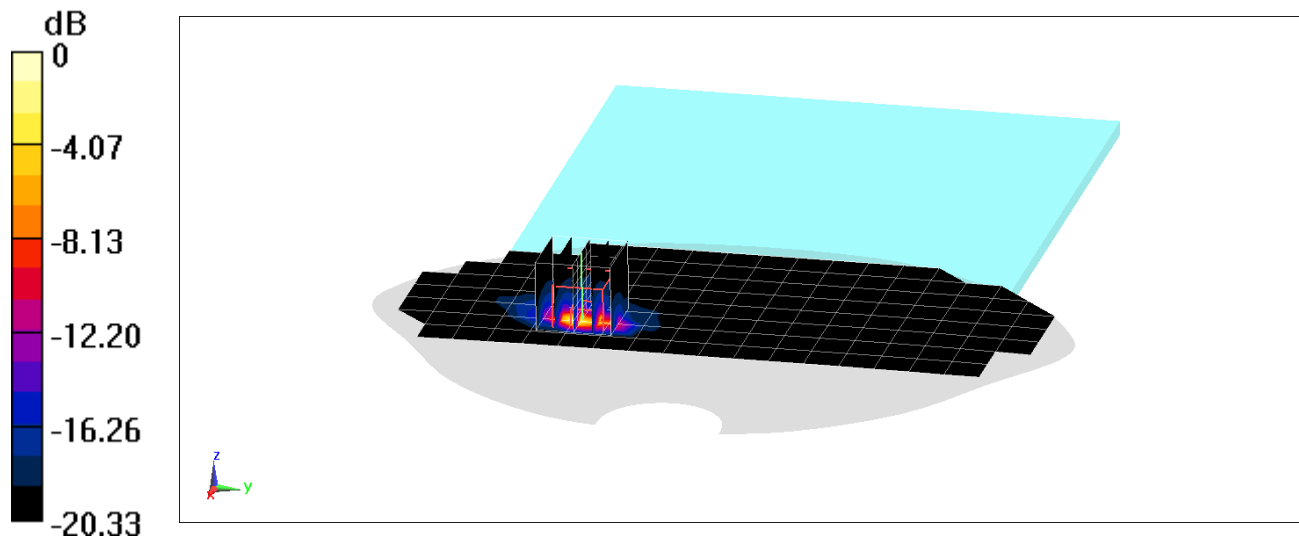

0 dB = 1.46 W/kg = 1.64 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCGA2014; Type: Tablet Device; Serial: DLXX7032KYD1

Communication System: UID 0, UMTS; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1907.6 \text{ MHz}$; $\sigma = 1.514 \text{ S/m}$; $\epsilon_r = 51.78$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 09-18-2018; Ambient Temp: 21.8°C; Tissue Temp: 21.7°C

Probe: ES3DV3 - SN3275; ConvF(4.85, 4.85, 4.85); Calibrated: 4/12/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn501; Calibrated: 4/12/2018

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CD; Serial: 1736

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: UMTS 1900 Ant 4A, Body SAR, Left Edge, High.ch


Area Scan (11x19x1): Measurement grid: dx=5mm, dy=15mm

Zoom Scan (5x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.05 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 2.74 W/kg

SAR(1 g) = 1.000 W/kg; SAR(10 g) = 0.400 W/kg

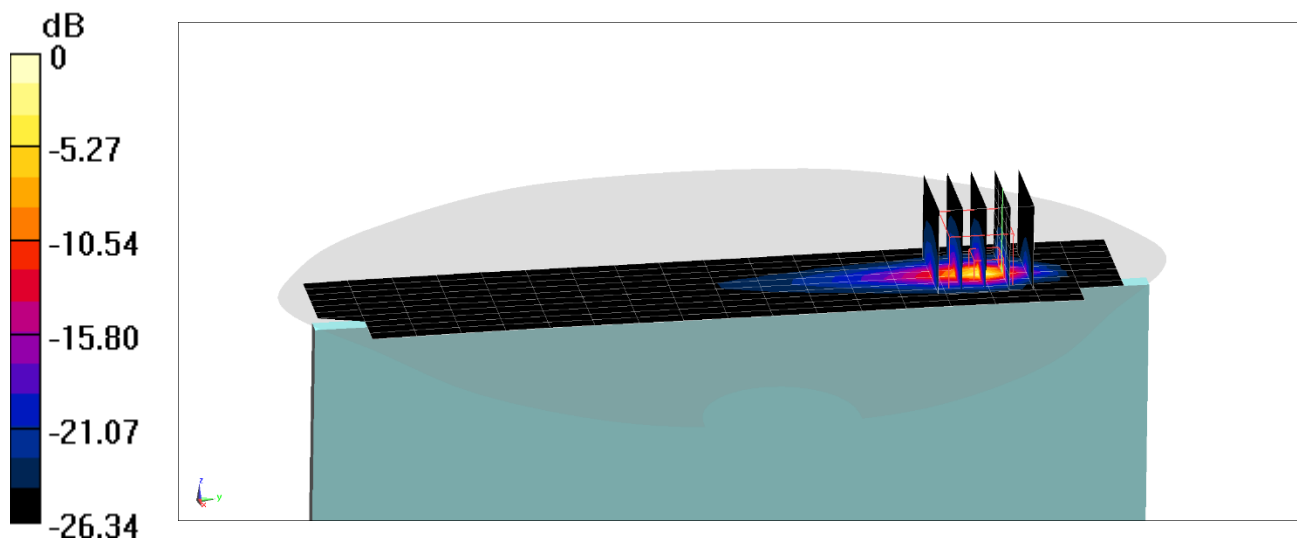

0 dB = 1.48 W/kg = 1.70 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCGA2014; Type: Tablet Device; Serial: DLXX702GKYD1

Communication System: UID 0, LTE Band 71; Frequency: 680.5 MHz; Duty Cycle: 1:1

Medium: 750 Body Medium parameters used (interpolated):

$f = 680.5 \text{ MHz}$; $\sigma = 0.945 \text{ S/m}$; $\epsilon_r = 55.03$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 09-12-2018; Ambient Temp: 23.2°C; Tissue Temp: 21.2°C

Probe: EX3DV4 - SN7416; ConvF(9.6, 9.6, 9.6); Calibrated: 7/20/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn793; Calibrated: 1/18/2018

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CC; Serial: 1596

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 71 Ant 3, Body SAR, Back side, Mid.ch,
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (7x19x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 31.41 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 2.27 W/kg

SAR(1 g) = 0.938 W/kg; SAR(10 g) = 0.474 W/kg

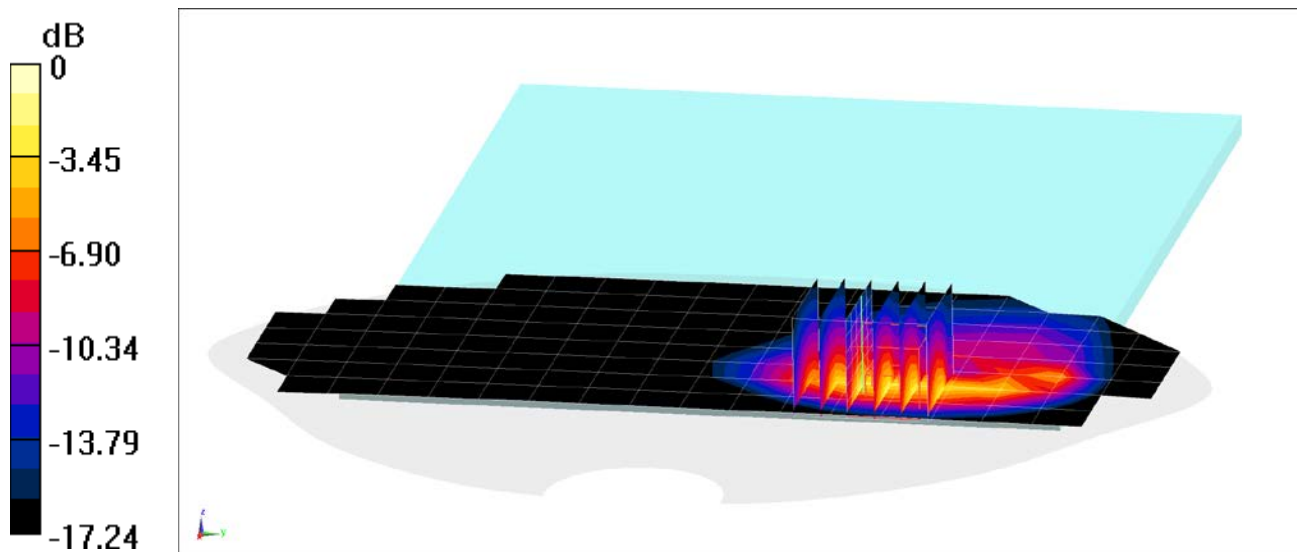

0 dB = 1.61 W/kg = 2.07 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCGA2014; Type: Tablet Device; Serial: DLXX702CKYD1

Communication System: UID 0, LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: 750 Body Medium parameters used (interpolated):

$f = 707.5 \text{ MHz}$; $\sigma = 0.923 \text{ S/m}$; $\epsilon_r = 56.249$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 09-20-2018; Ambient Temp: 21.2°C; Tissue Temp: 22.8°C

Probe: EX3DV4 - SN7416; ConvF(9.6, 9.6, 9.6); Calibrated: 7/20/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn793; Calibrated: 1/18/2018

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CC; Serial: 1179

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 12 Ant 3, Body SAR, Back side, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (9x19x1): Measurement grid: dx=10mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 36.24 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 2.67 W/kg

SAR(1 g) = 1.12 W/kg; SAR(10 g) = 0.579 W/kg

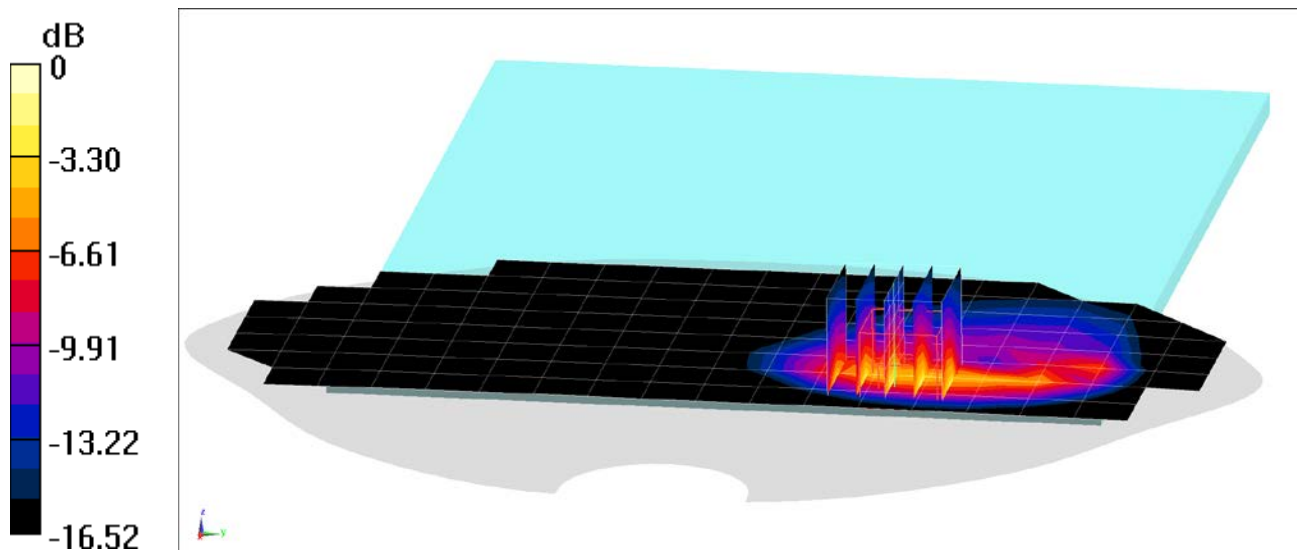

0 dB = 2.03 W/kg = 3.07 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCGA2014; Type: Tablet Device; Serial: DLXX702CKYD1

Communication System: UID 0, LTE Band 13; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: 750 Body Medium parameters used (interpolated):

$f = 782 \text{ MHz}$; $\sigma = 0.995 \text{ S/m}$; $\epsilon_r = 55.547$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 09-20-2018; Ambient Temp: 21.2°C; Tissue Temp: 22.8°C

Probe: EX3DV4 - SN7416; ConvF(9.6, 9.6, 9.6); Calibrated: 7/20/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn793; Calibrated: 1/18/2018

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CC; Serial: 1179

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 13 Ant 3, Body SAR, Back side, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (9x19x1): Measurement grid: dx=10mm, dy=15mm

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 35.03 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 2.64 W/kg

SAR(1 g) = 1.13 W/kg; SAR(10 g) = 0.570 W/kg

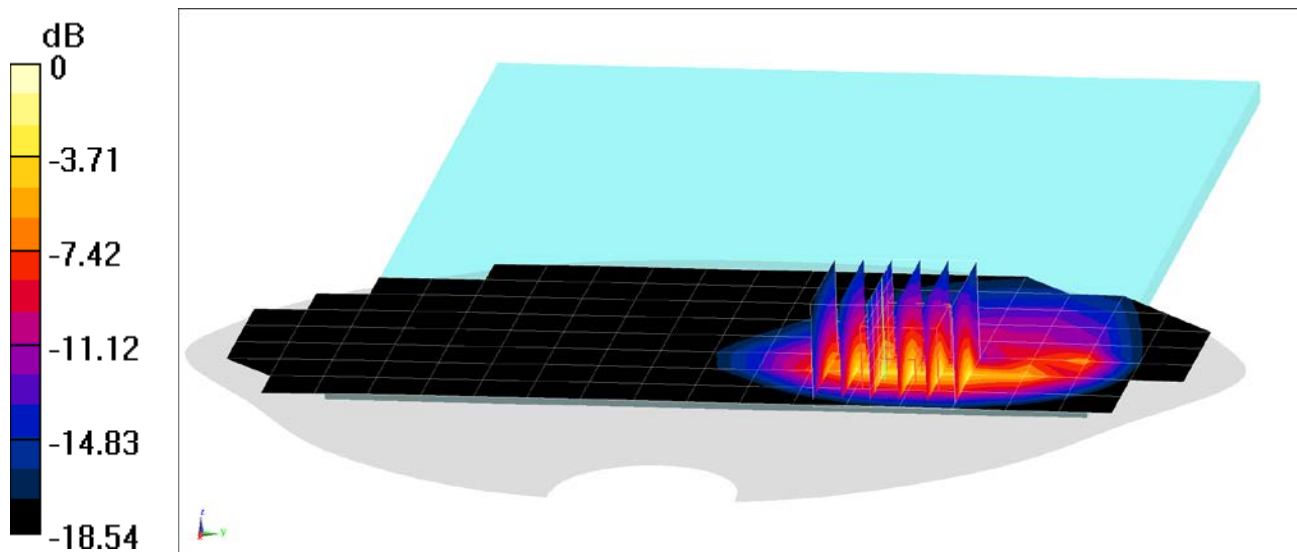

0 dB = 2.04 W/kg = 3.10 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCGA2014; Type: Tablet Device; Serial: DLXX702CKYD1

Communication System: UID 0, LTE Band 14; Frequency: 793 MHz; Duty Cycle: 1:1

Medium: 750 Body Medium parameters used (interpolated):

$f = 793 \text{ MHz}$; $\sigma = 1.006 \text{ S/m}$; $\epsilon_r = 55.441$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 09-20-2018; Ambient Temp: 21.2°C; Tissue Temp: 22.8°C

Probe: EX3DV4 - SN7416; ConvF(9.6, 9.6, 9.6); Calibrated: 7/20/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn793; Calibrated: 1/18/2018

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CC; Serial: 1179

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 14 Ant 3, Body SAR, Back side, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (9x19x1): Measurement grid: dx=10mm, dy=15mm

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 31.69 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 2.36 W/kg

SAR(1 g) = 0.961 W/kg; SAR(10 g) = 0.485 W/kg

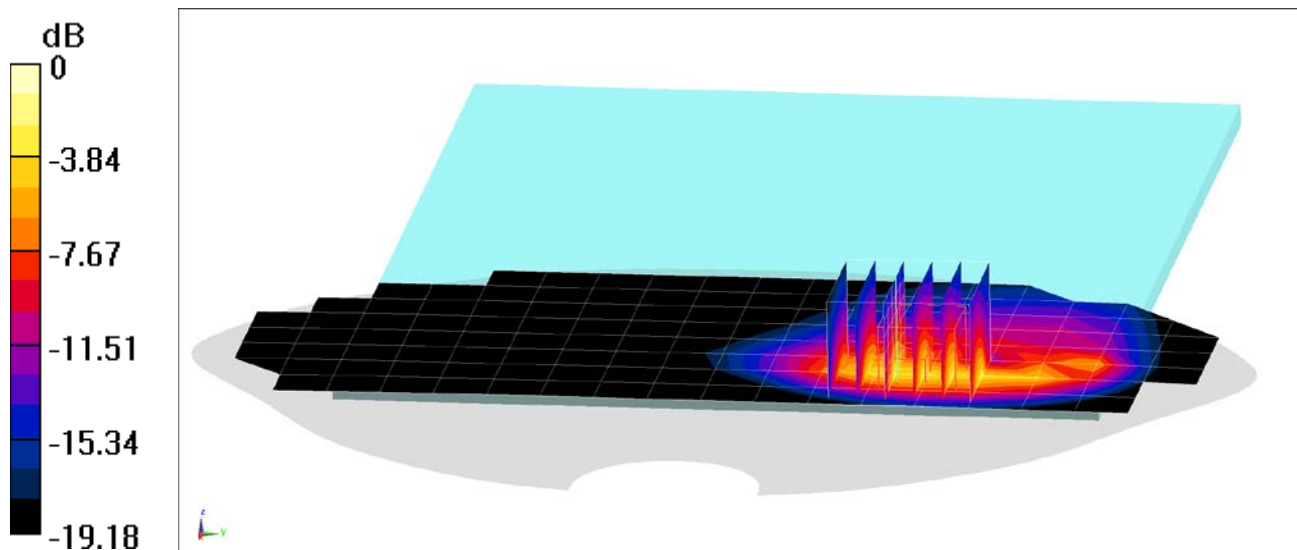

0 dB = 1.82 W/kg = 2.60 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCGA2014; Type: Tablet Device; Serial: DLXX702DKYD1

Communication System: UID 0, LTE Band 5; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used (interpolated):

$f = 836.5 \text{ MHz}$; $\sigma = 0.996 \text{ S/m}$; $\epsilon_r = 53.716$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 09-21-2018; Ambient Temp: 23.3°C; Tissue Temp: 21.2°C

Probe: EX3DV4 - SN7490; ConvF(10.3, 10.3, 10.3); Calibrated: 1/26/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1532; Calibrated: 1/26/2018

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1936

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 5 (Cell.) Ant 1, Body SAR, Left Edge, Mid.ch,
10 MHz Bandwidth, QPSK, 25 RB, 0 RB Offset**


Area Scan (10x21x1): Measurement grid: dx=5mm, dy=15mm

Zoom Scan (5x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 32.37 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 5.86 W/kg

SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.385 W/kg

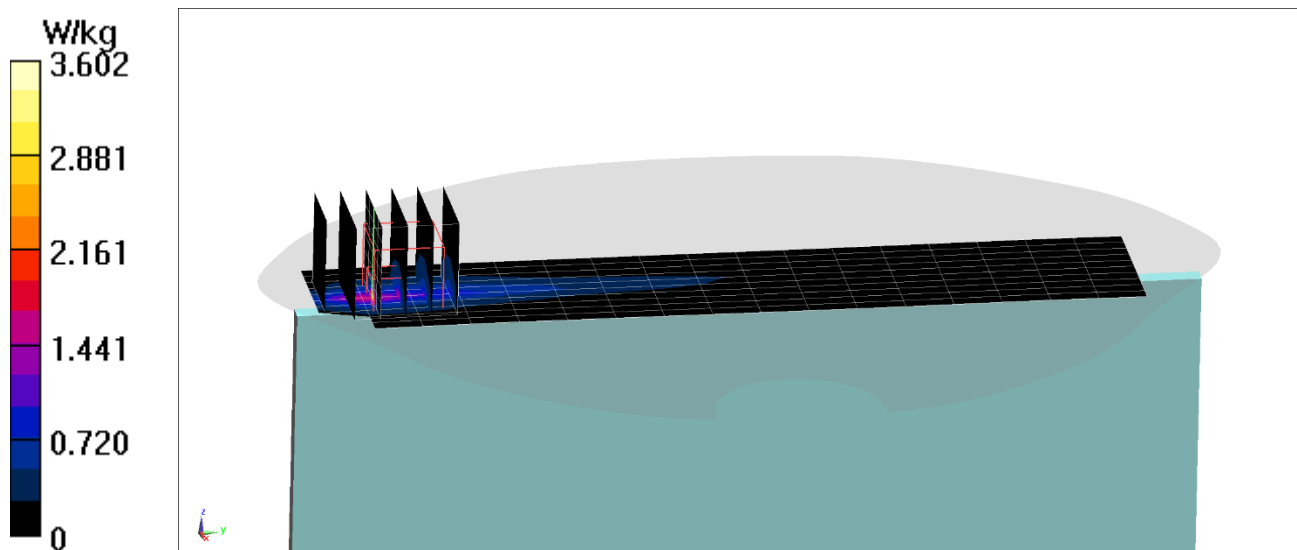

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCGA2014; Type: Tablet Device; Serial: DLXX7032KYD1

Communication System: UID 0, LTE Band 26; Frequency: 819 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used (interpolated):

$f = 819 \text{ MHz}$; $\sigma = 0.986 \text{ S/m}$; $\epsilon_r = 53.639$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 09-08-2018; Ambient Temp: 22.9°C; Tissue Temp: 20.9°C

Probe: EX3DV4 - SN7490; ConvF(10.3, 10.3, 10.3); Calibrated: 1/26/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1532; Calibrated: 1/26/2018

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1936

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 26 (Cell.) Ant 1, Body SAR, Left Edge, Low.ch,
10 MHz Bandwidth, QPSK, 50 RB, 0 RB Offset**


Area Scan (10x21x1): Measurement grid: dx=5mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 37.37 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 6.20 W/kg

SAR(1 g) = 1.06 W/kg; SAR(10 g) = 0.383 W/kg

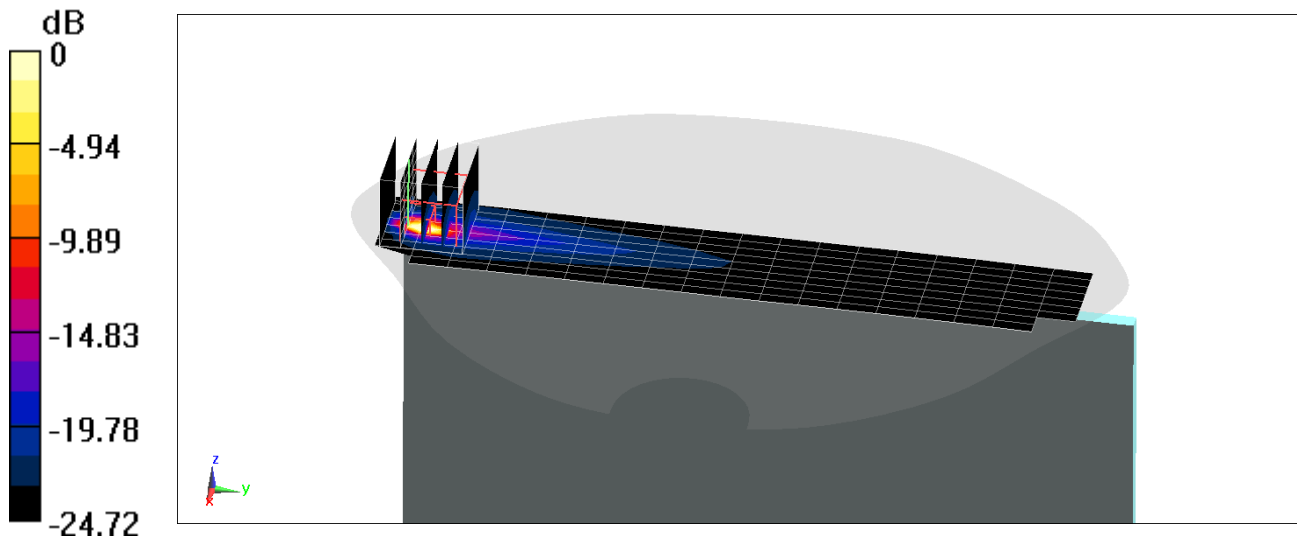

0 dB = 4.02 W/kg = 6.04 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCGA2014; Type: Tablet Device; Serial: DLXX501MKYD1

Communication System: UID 0, LTE Band 4 (AWS); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used (interpolated):

$f = 1732.5 \text{ MHz}$; $\sigma = 1.514 \text{ S/m}$; $\epsilon_r = 51.503$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 09-10-2018; Ambient Temp: 22.0°C; Tissue Temp: 22.1°C

Probe: ES3DV3 - SN3287; ConvF(5.19, 5.19, 5.19); Calibrated: 9/18/2017;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1533; Calibrated: 1/26/2018

Phantom: Twin-SAM V8.0_Right; Type: QD 000 P41 Ax; Serial: 1944

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 4 (AWS) Ant 2A, Body SAR, Back side, Mid.ch,
20 MHz Bandwidth, QPSK, 100 RB, 0 RB Offset**


Area Scan (9x19x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 26.78 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 2.24 W/kg

SAR(1 g) = 0.996 W/kg; SAR(10 g) = 0.489 W/kg

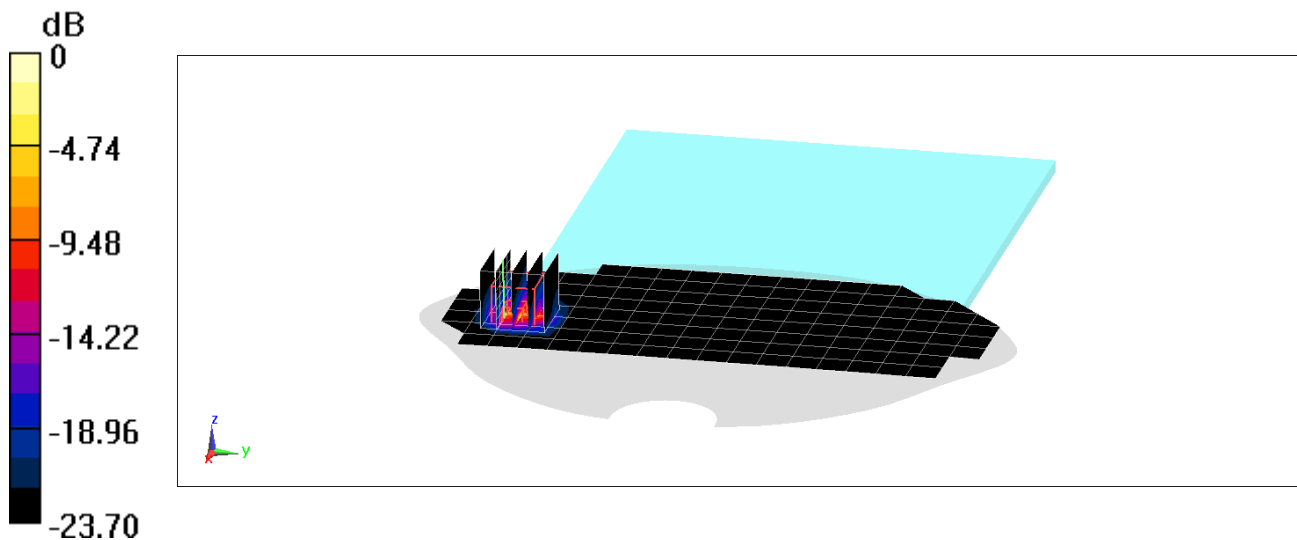

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCGA2014; Type: Tablet Device; Serial: DLXX501MKYD1

Communication System: UID 0, LTE Band 66 (AWS); Frequency: 1770 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used (interpolated):

$f = 1770 \text{ MHz}$; $\sigma = 1.549 \text{ S/m}$; $\epsilon_r = 51.391$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 09-10-2018; Ambient Temp: 22.0°C; Tissue Temp: 22.1°C

Probe: ES3DV3 - SN3287; ConvF(5.19, 5.19, 5.19); Calibrated: 9/18/2017;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1533; Calibrated: 1/26/2018

Phantom: Twin-SAM V8.0_Right; Type: QD 000 P41 Ax; Serial: 1944

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 66 (AWS) Ant 4B, Body SAR, Back side, High.ch,
20 MHz Bandwidth, QPSK, 100 RB, 0 RB Offset**


Area Scan (9x19x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 28.34 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 2.66 W/kg

SAR(1 g) = 1.14 W/kg; SAR(10 g) = 0.490 W/kg

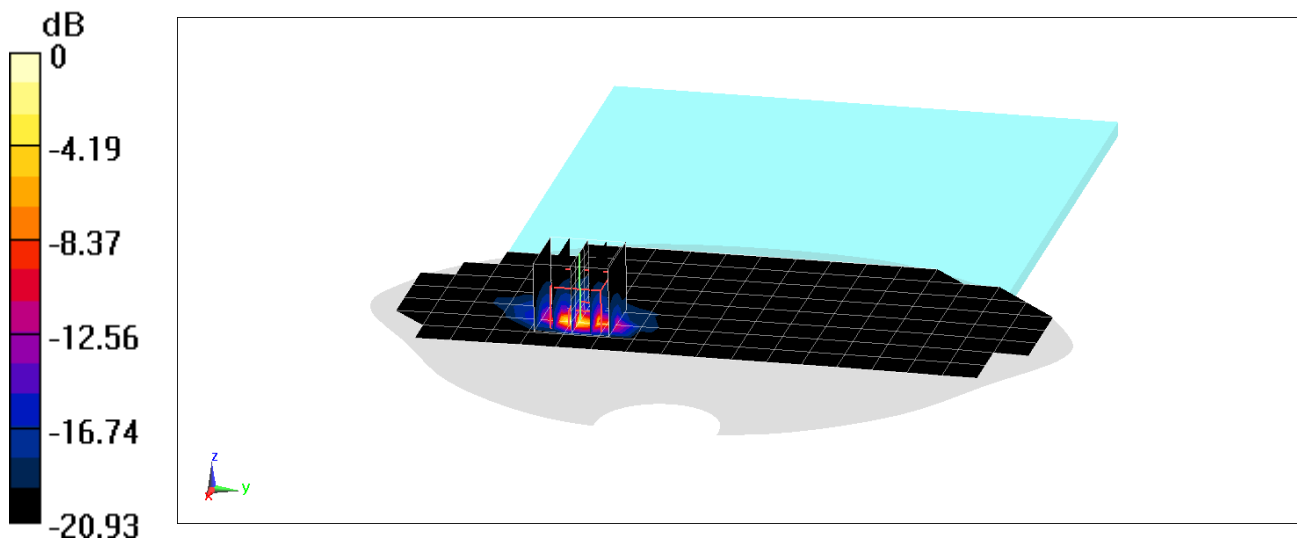

0 dB = 1.45 W/kg = 1.61 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCGA2014; Type: Tablet Device; Serial: DLXX501MKYD1

Communication System: UID 0, LTE Band 25 (PCS); Frequency: 1882.5 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1882.5 \text{ MHz}$; $\sigma = 1.573 \text{ S/m}$; $\epsilon_r = 51.536$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 09-10-2018; Ambient Temp: 23.3°C; Tissue Temp: 22.2°C

Probe: ES3DV3 - SN3287; ConvF(5, 5, 5); Calibrated: 9/18/2017;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1533; Calibrated: 1/26/2018

Phantom: Twin-SAM V8.0_Left; Type: QD 000 P41 AA; Serial: 1935

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 25 (PCS) Ant 4B, Body SAR, Back side, Mid.ch,
20 MHz Bandwidth, QPSK, 50 RB, 0 RB Offset**


Area Scan (9x19x1): Measurement grid: dx=5mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.30 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 2.90 W/kg

SAR(1 g) = 1.18 W/kg; SAR(10 g) = 0.486 W/kg

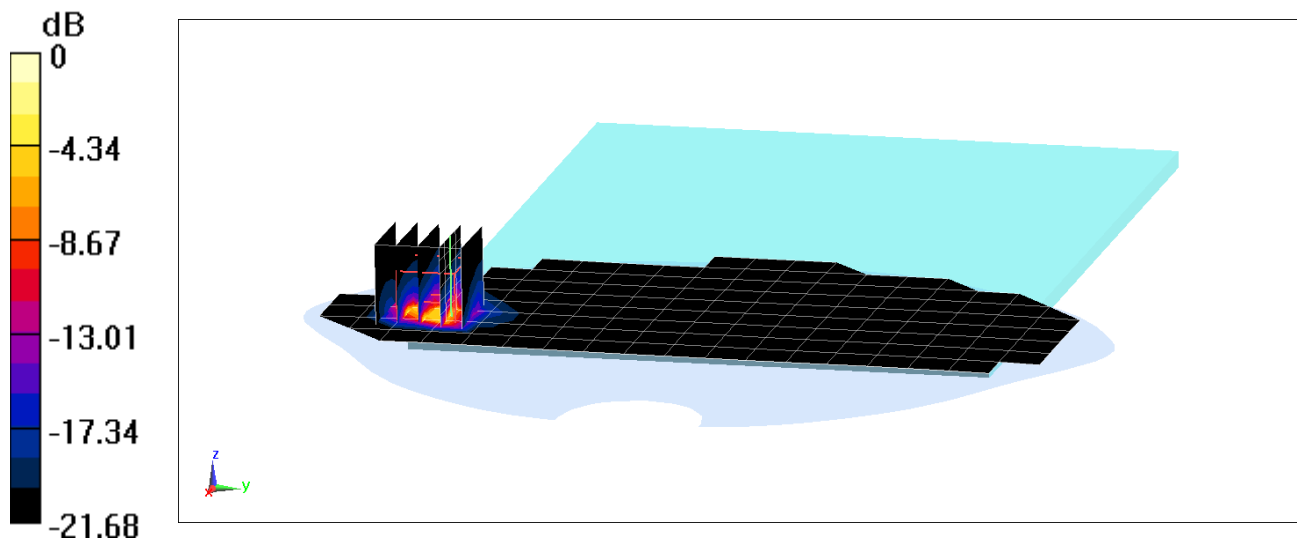

0 dB = 1.72 W/kg = 2.36 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCGA2014; Type: Tablet Device; Serial: DLXX702DKYD1

Communication System: UID 0, LTE Band 30; Frequency: 2310 MHz; Duty Cycle: 1:1

Medium: 2300-2600 Body Medium parameters used:

$f = 2310 \text{ MHz}$; $\sigma = 1.873 \text{ S/m}$; $\epsilon_r = 51.636$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 09-12-2018; Ambient Temp: 23.1°C; Tissue Temp: 22.1°C

Probe: ES3DV2 - SN3022; ConvF(4.36, 4.36, 4.36); Calibrated: 6/22/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn701; Calibrated: 6/18/2018

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CA; Serial: 1275

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 30 Ant 4A, Body SAR, Back side, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (9x19x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 27.66 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 3.27 W/kg

SAR(1 g) = 1.16 W/kg; SAR(10 g) = 0.549 W/kg

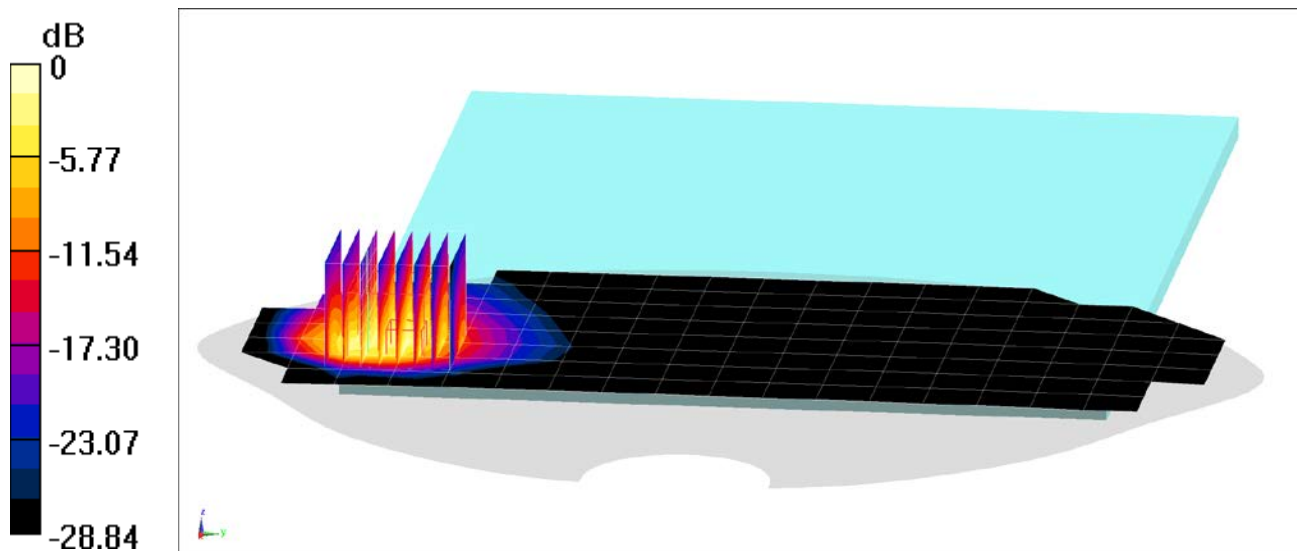

0 dB = 1.72 W/kg = 2.36 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCGA2014; Type: Tablet Device; Serial: DLXX702CKYD1

Communication System: UID 0, LTE Band 7; Frequency: 2560 MHz; Duty Cycle: 1:1

Medium: 2300-2600 Body Medium parameters used (interpolated):

$f = 2560$ MHz; $\sigma = 2.162$ S/m; $\epsilon_r = 51.147$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 09-10-2018; Ambient Temp: 22.3°C; Tissue Temp: 22.1°C

Probe: ES3DV2 - SN3022; ConvF(4.03, 4.03, 4.03); Calibrated: 6/22/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn701; Calibrated: 6/18/2018

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CA; Serial: 1275

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 7 Ant 4A, Body SAR, Back side, High.ch,
20 MHz Bandwidth, QPSK, 100 RB, 0 RB Offset**


Area Scan (9x19x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.58 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 4.17 W/kg

SAR(1 g) = 1.15 W/kg; SAR(10 g) = 0.482 W/kg

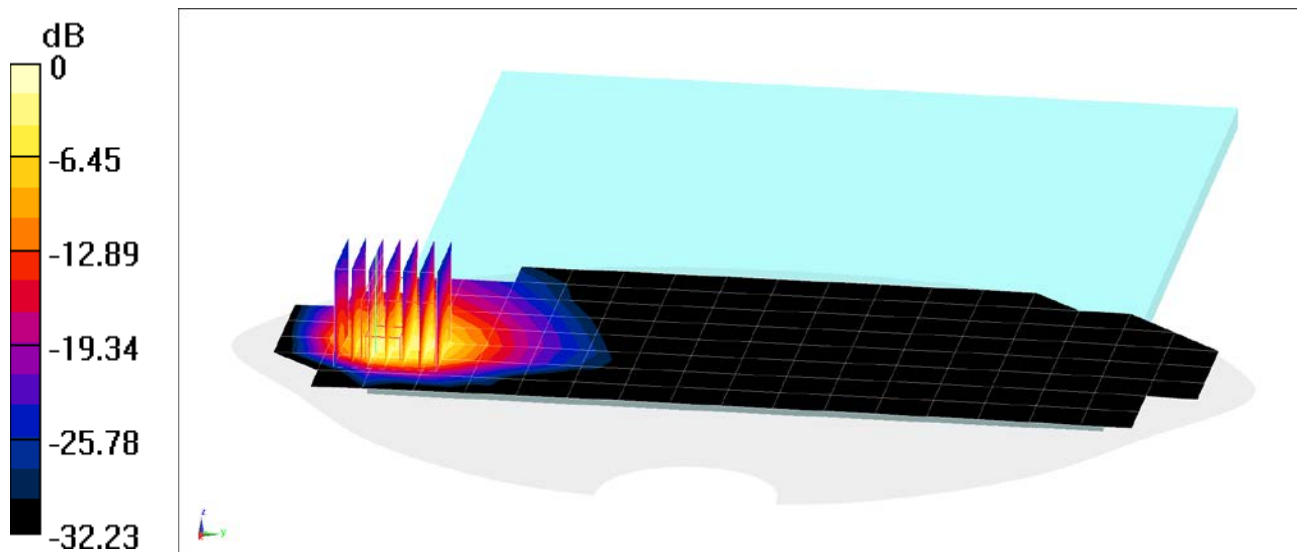

0 dB = 1.85 W/kg = 2.67 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCGA2014; Type: Tablet Device; Serial: DLXX702RKYD1

Communication System: UID 0, LTE Band 41 (Class 3); Frequency: 2506 MHz; Duty Cycle: 1:1.58

Medium: 2450-2600 Body Medium parameters used (interpolated):

$f = 2506 \text{ MHz}$; $\sigma = 2.045 \text{ S/m}$; $\epsilon_r = 51.24$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 09-10-2018; Ambient Temp: 22.6°C; Tissue Temp: 22.0°C

Probe: ES3DV3 - SN3329; ConvF(4.5, 4.5, 4.5); Calibrated: 2/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1403; Calibrated: 2/8/2018

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 41 Ant 2B, Body SAR, Back side, Low.ch,
20 MHz Bandwidth, QPSK, 1 RB, 99 RB Offset**


Area Scan (9x19x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 20.19 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 3.66 W/kg

SAR(1 g) = 1.18 W/kg; SAR(10 g) = 0.437 W/kg

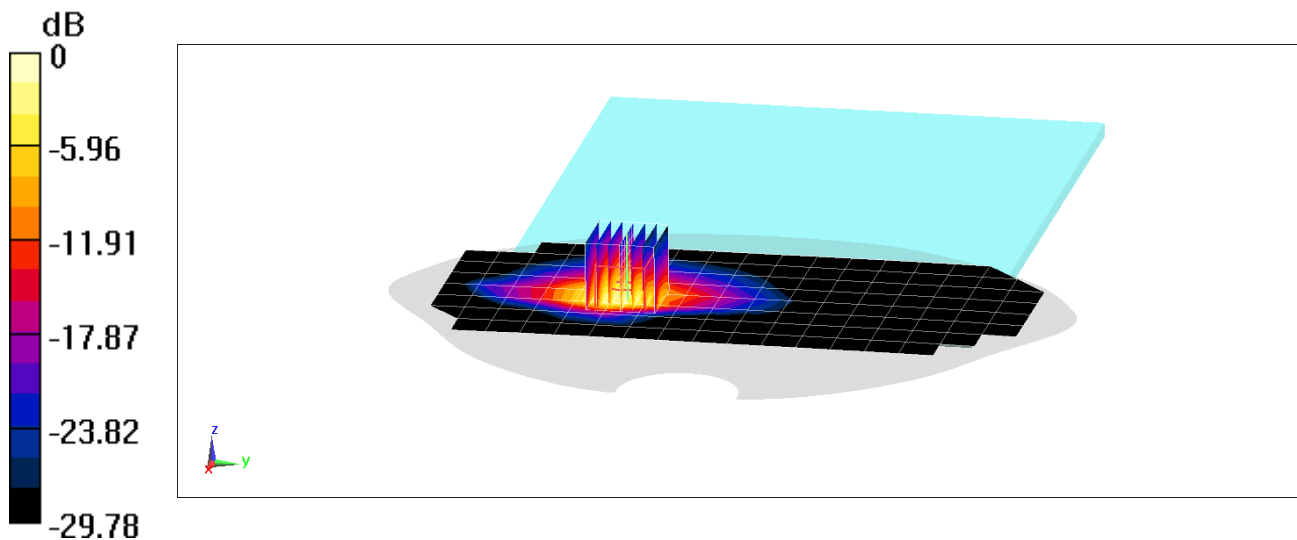

0 dB = 1.70 W/kg = 2.30 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCGA2014; Type: Tablet Device; Serial: DLXX502KKYD1

Communication System: UID 0, IEEE 802.11b; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used (interpolated):

$f = 2412 \text{ MHz}$; $\sigma = 2.003 \text{ S/m}$; $\epsilon_r = 51.607$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 09-21-2018; Ambient Temp: 23.1°C; Tissue Temp: 21.3°C

Probe: ES3DV2 - SN3022; ConvF(4.22, 4.22, 4.22); Calibrated: 6/22/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn701; Calibrated: 6/18/2018

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CA; Serial: 1275

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: IEEE 802.11b Ant 2A Variant 1, 22 MHz Bandwidth, Body SAR,
Ch 1, 1 Mbps, Back Side**


Area Scan (9x19x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (8x9x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 22.16 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 3.47 W/kg

SAR(1 g) = 1.15 W/kg; SAR(10 g) = 0.509 W/kg

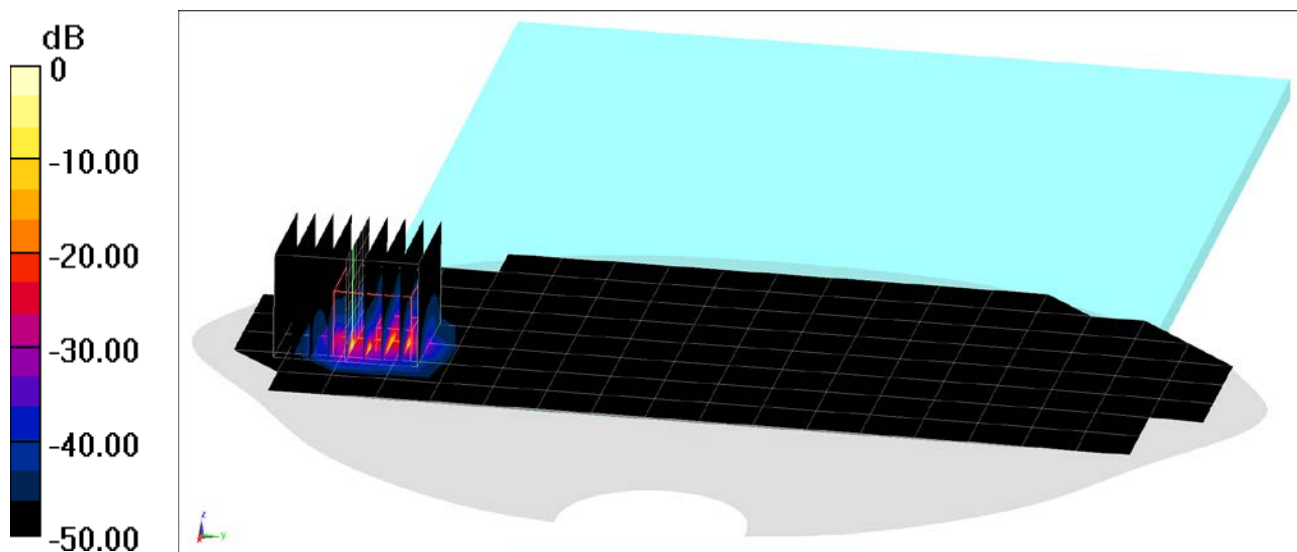

0 dB = 1.76 W/kg = 2.46 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCGA2014; Type: Tablet Device; Serial: DLXX502KKYD1

Communication System: UID 0, IEEE 802.11ac; Frequency: 5775 MHz; Duty Cycle: 1:1

Medium: 5GHz Body Medium parameters used (interpolated):

$f = 5775 \text{ MHz}$; $\sigma = 6.156 \text{ S/m}$; $\epsilon_r = 46.606$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 09-18-2018; Ambient Temp: 24.4°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN3837; ConvF(4.43, 4.43, 4.43); Calibrated: 3/16/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn604; Calibrated: 3/7/2018

Phantom: SAM Sub; Type: QD 000 P40 CC; Serial: 1375

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: IEEE 802.11ac, U-NII-3 Ant 6 Variant 1, 80 MHz Bandwidth,
Body SAR, Ch 155, 29.3 Mbps, Right Edge**


Area Scan (11x31x1): Measurement grid: $dx=5\text{mm}$, $dy=10\text{mm}$

Zoom Scan (9x10x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio: 1.4

Reference Value = 14.29 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 6.03 W/kg

SAR(1 g) = 1.11 W/kg; SAR(10 g) = 0.320 W/kg

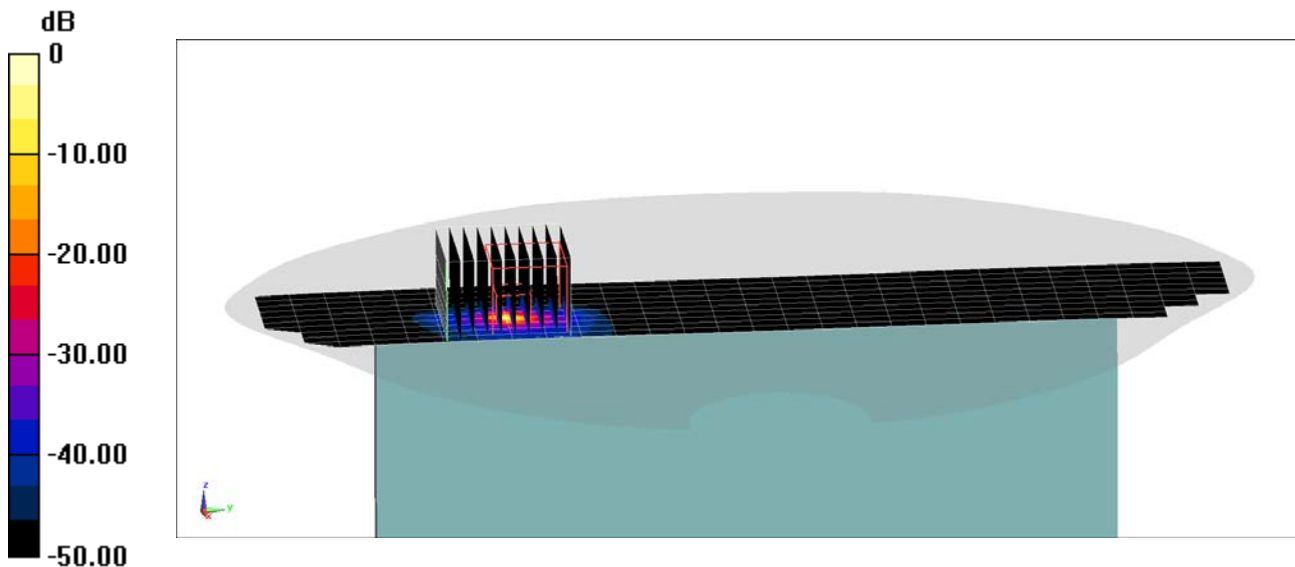

0 dB = 3.33 W/kg = 5.22 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: BCGA2014; Type: Tablet Device; Serial: DLXX303LKNQK

Communication System: UID 0, Bluetooth; Frequency: 2480 MHz; Duty Cycle: 1:1.314

Medium: 2450 Body Medium parameters used (interpolated):

$f = 2480 \text{ MHz}$; $\sigma = 2.036 \text{ S/m}$; $\epsilon_r = 51.346$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 09-06-2018; Ambient Temp: 21.0°C; Tissue Temp: 21.3°C

Probe: ES3DV3 - SN3275; ConvF(4.57, 4.57, 4.57); Calibrated: 4/12/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn501; Calibrated: 4/12/2018

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CD; Serial: 1736

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: Bluetooth Ant 2A Variant 1, Body SAR, Ch 78, 1 Mbps, Back Side


Area Scan (9x19x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 23.92 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 3.19 W/kg

SAR(1 g) = 1.05 W/kg; SAR(10 g) = 0.462 W/kg

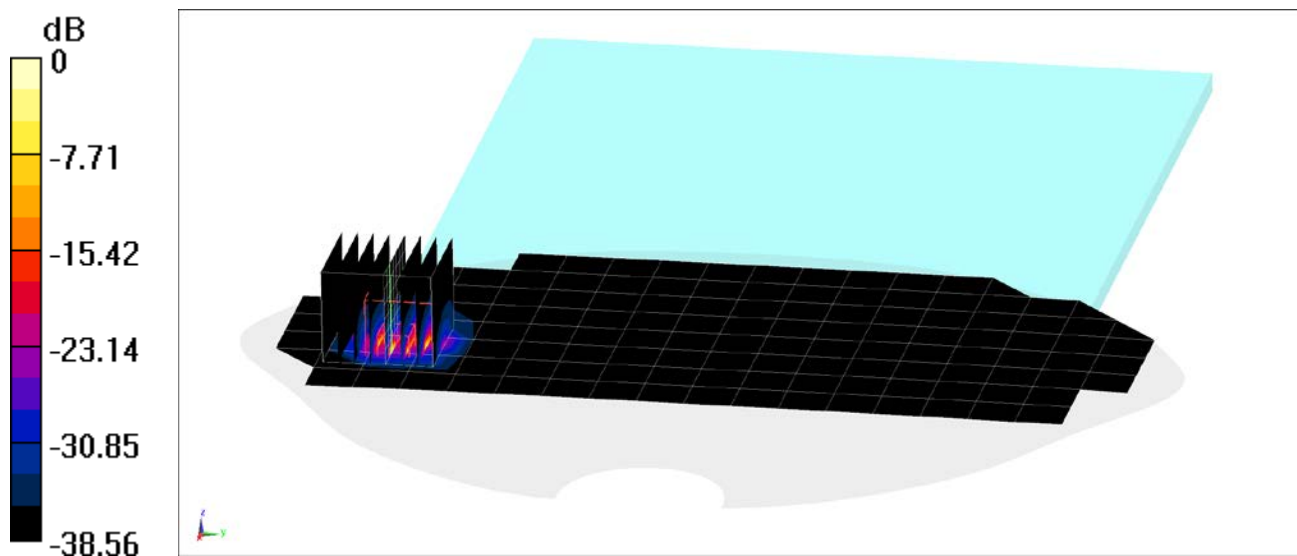

0 dB = 1.60 W/kg = 2.04 dBW/kg

APPENDIX B: SYSTEM VERIFICATION

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 750 MHz; Type: D750V3; Serial: 1034

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: 750 Body Medium parameters used (interpolated):

$f = 750 \text{ MHz}$; $\sigma = 0.969 \text{ S/m}$; $\epsilon_r = 54.916$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 09-12-2018; Ambient Temp: 23.2°C; Tissue Temp: 21.2°C

Probe: EX3DV4 - SN7416; ConvF(9.6, 9.6, 9.6); Calibrated: 7/20/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn793; Calibrated: 1/18/2018

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CC; Serial: 1596

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

750 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 2.85 W/kg

SAR(1 g) = 1.85 W/kg; SAR(10 g) = 1.22 W/kg

Deviation(1 g) = 7.93%

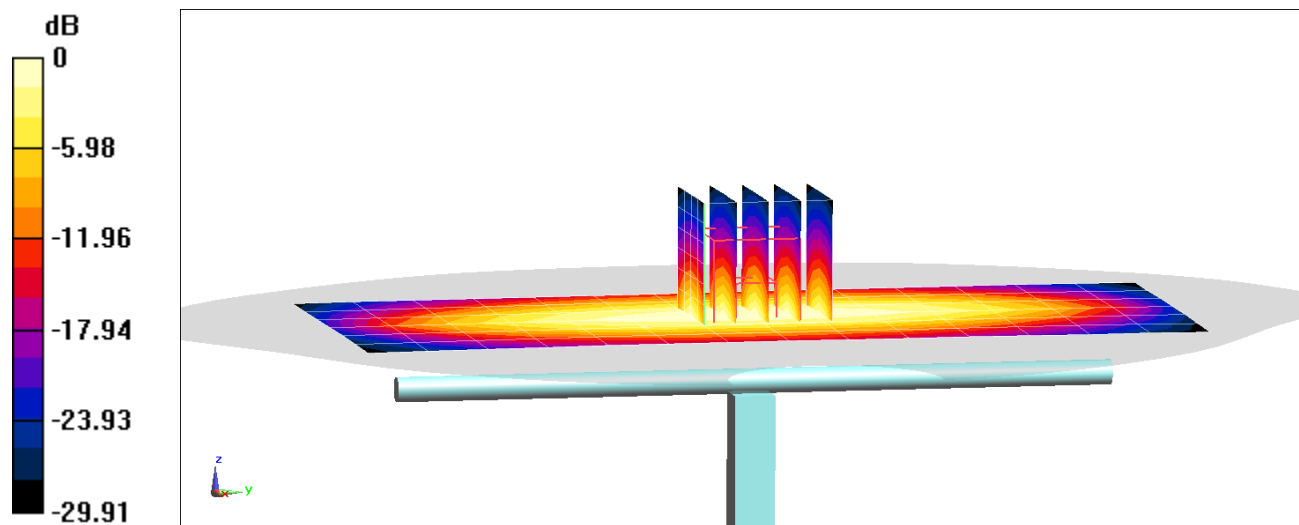

0 dB = 2.51 W/kg = 3.99 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 750 MHz; Type: D750V3; Serial: 1057

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: 750 Body Medium parameters used (interpolated):

$f = 750 \text{ MHz}$; $\sigma = 0.962 \text{ S/m}$; $\epsilon_r = 55.825$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 09-20-2018; Ambient Temp: 21.2°C; Tissue Temp: 22.8°C

Probe: EX3DV4 - SN7416; ConvF(9.6, 9.6, 9.6); Calibrated: 7/20/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn793; Calibrated: 1/18/2018

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CC; Serial: 1179

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

750 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 2.71 W/kg

SAR(1 g) = 1.77 W/kg; SAR(10 g) = 1.16 W/kg

Deviation(1 g) = 0.68%

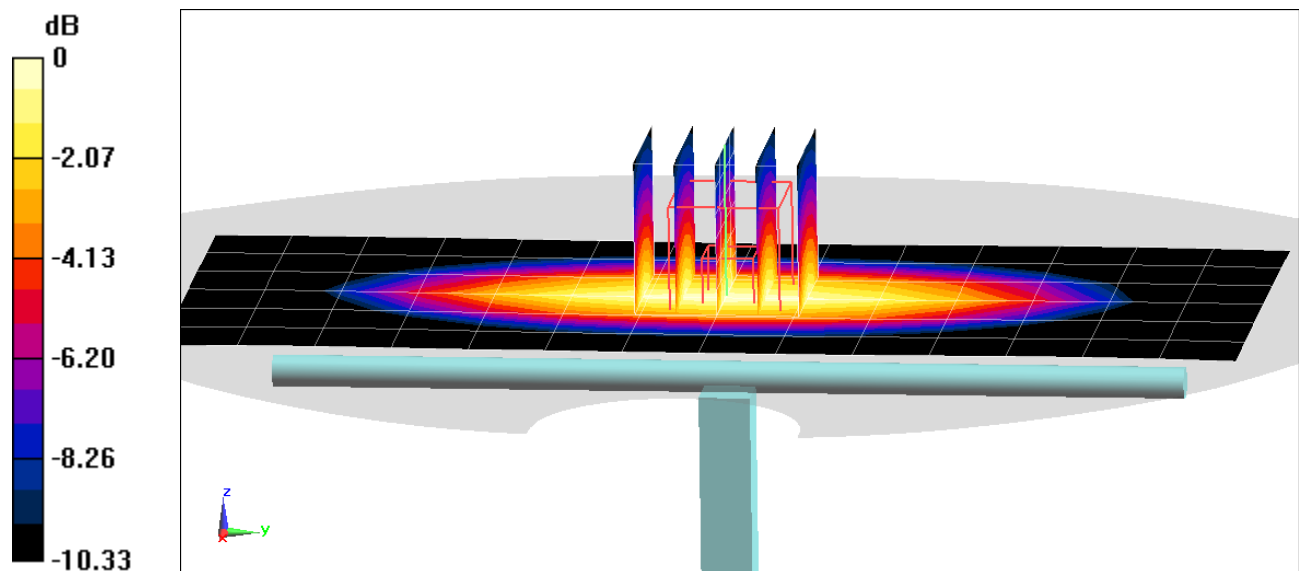

0 dB = 2.39 W/kg = 3.78 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d180

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used:

$f = 835 \text{ MHz}$; $\sigma = 1.002 \text{ S/m}$; $\epsilon_r = 53.473$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 09-08-2018; Ambient Temp: 22.9°C; Tissue Temp: 20.9°C

Probe: EX3DV4 - SN7490; ConvF(10.3, 10.3, 10.3); Calibrated: 1/26/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1532; Calibrated: 1/26/2018

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1936

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

835 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 3.00 W/kg

SAR(1 g) = 1.98 W/kg; SAR(10 g) = 1.3 W/kg

Deviation(1 g) = 3.23%

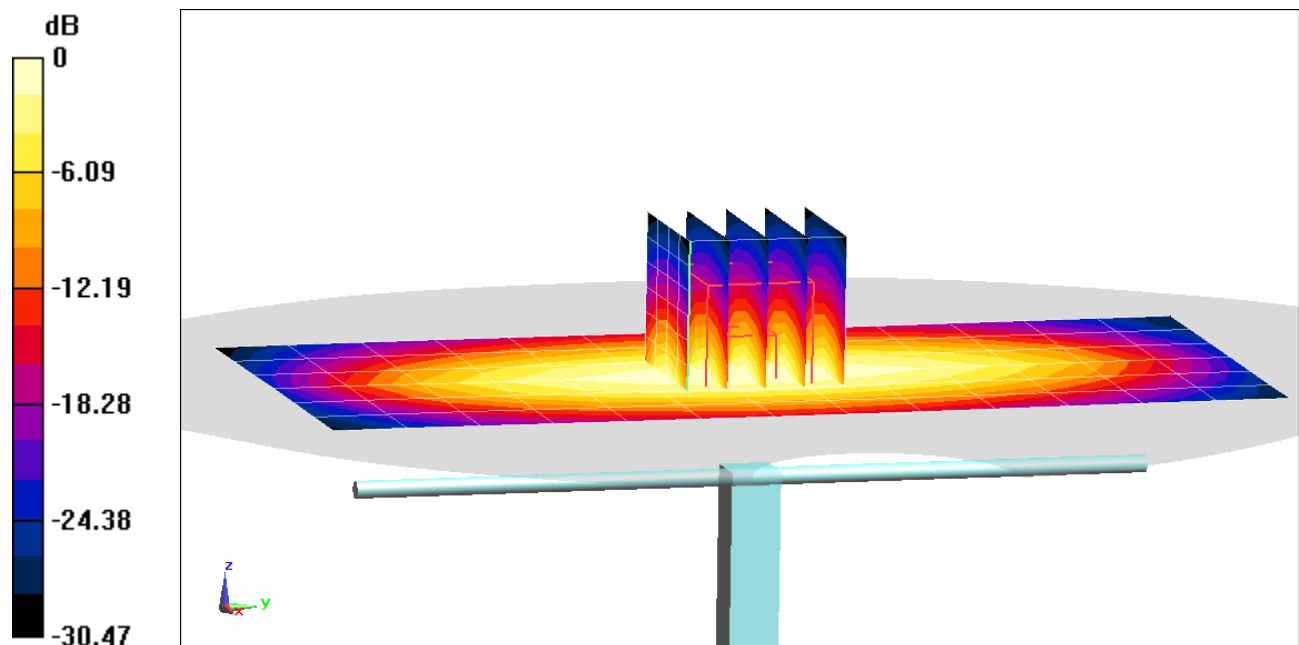

0 dB = 2.61 W/kg = 4.17 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 850 MHz; Type: D850V2; Serial: 1010

Communication System: UID 0, CW; Frequency: 850 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used:

$f = 850 \text{ MHz}$; $\sigma = 1.016 \text{ S/m}$; $\epsilon_r = 54.414$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 09-19-2018; Ambient Temp: 23.3°C; Tissue Temp: 21.2°C

Probe: EX3DV4 - SN7490; ConvF(10.3, 10.3, 10.3); Calibrated: 1/26/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1532; Calibrated: 1/26/2018

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1936

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

850 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 2.99 W/kg

SAR(1 g) = 1.98 W/kg; SAR(10 g) = 1.3 W/kg

Deviation(1 g) = -2.94%

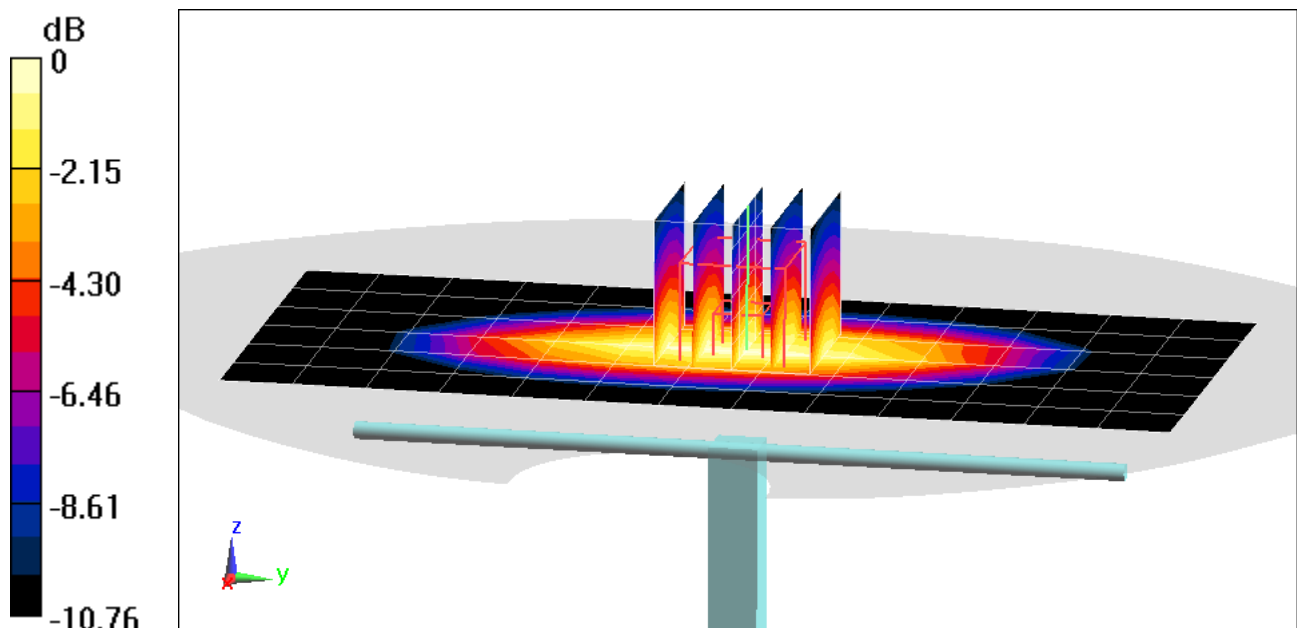

0 dB = 2.66 W/kg = 4.25 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 850 MHz; Type: D850V2; Serial: 1010

Communication System: UID 0, CW; Frequency: 850 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used:

$f = 850 \text{ MHz}$; $\sigma = 1.009 \text{ S/m}$; $\epsilon_r = 53.559$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 09-21-2018; Ambient Temp: 23.3°C; Tissue Temp: 21.2°C

Probe: EX3DV4 - SN7490; ConvF(10.3, 10.3, 10.3); Calibrated: 1/26/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1532; Calibrated: 1/26/2018

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1936

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

850 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 2.90 W/kg

SAR(1 g) = 1.94 W/kg; SAR(10 g) = 1.28 W/kg

Deviation(1 g) = -4.90%

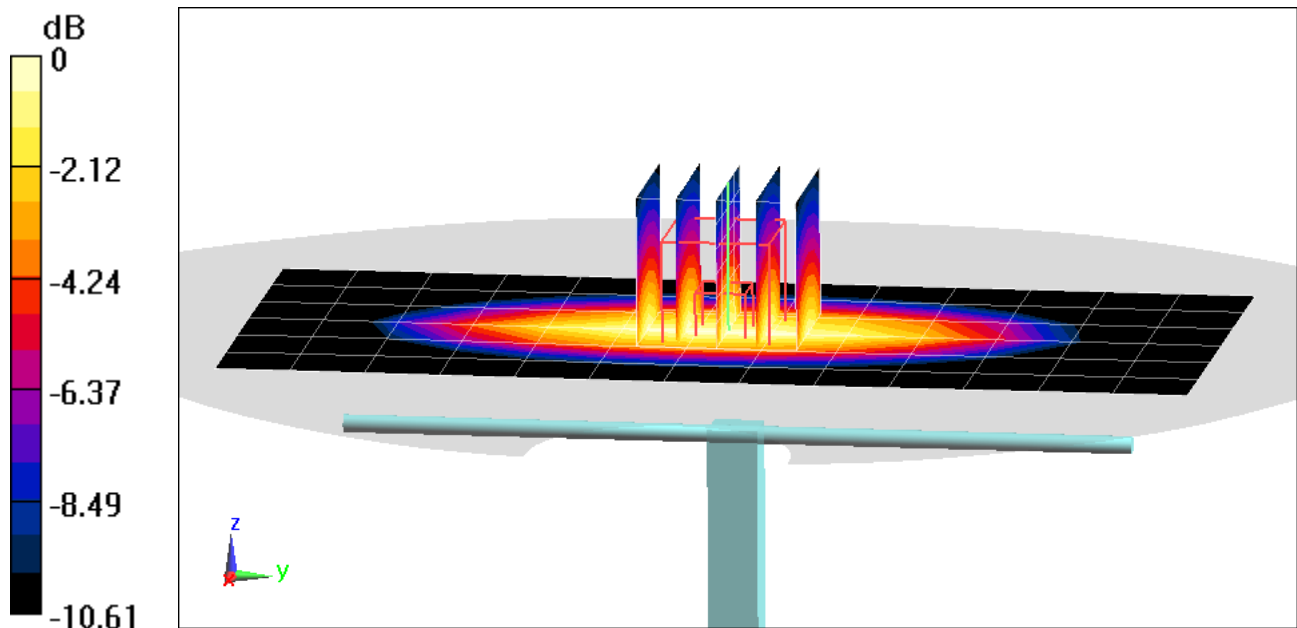

0 dB = 2.58 W/kg = 4.12 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1083

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used:

$f = 1750 \text{ MHz}$; $\sigma = 1.531 \text{ S/m}$; $\epsilon_r = 51.452$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 09-10-2018; Ambient Temp: 22.0°C; Tissue Temp: 22.1°C

Probe: ES3DV3 - SN3287; ConvF(5.19, 5.19, 5.19); Calibrated: 9/18/2017;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1533; Calibrated: 1/26/2018

Phantom: Twin-SAM V8.0_Right; Type: QD 000 P41 Ax; Serial: 1944

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

1750 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 7.02 W/kg

SAR(1 g) = 3.98 W/kg; SAR(10 g) = 2.12 W/kg

Deviation(1 g) = 6.70%

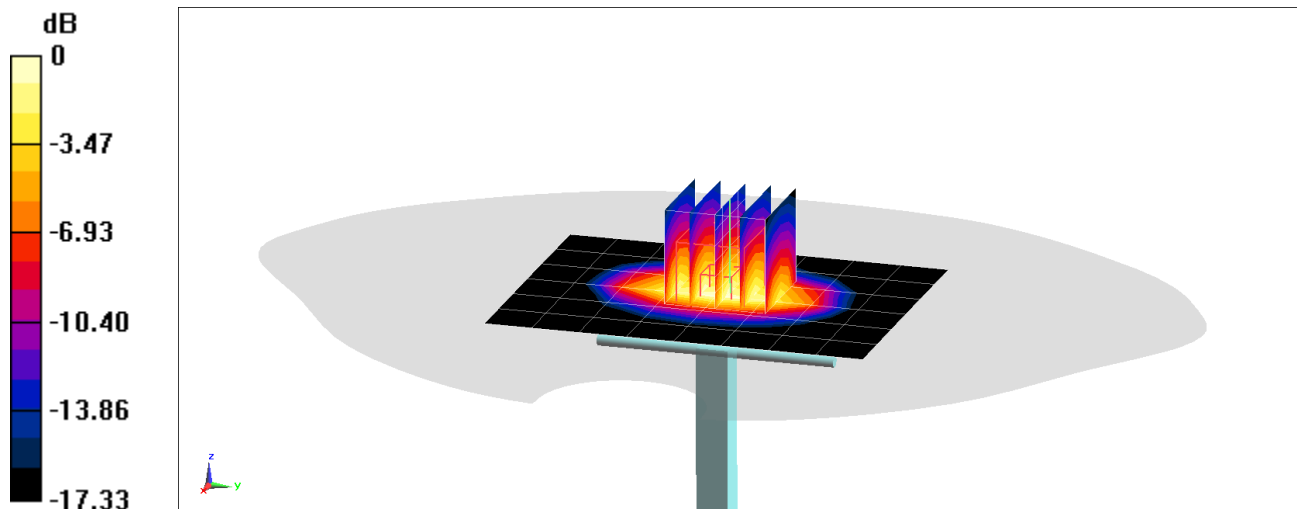

0 dB = 4.96 W/kg = 6.95 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1083

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used:

$f = 1750 \text{ MHz}$; $\sigma = 1.546 \text{ S/m}$; $\epsilon_r = 51.375$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 09-17-2018; Ambient Temp: 23.3°C; Tissue Temp: 21.0°C

Probe: ES3DV3 - SN3287; ConvF(5.19, 5.19, 5.19); Calibrated: 9/18/2017;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1533; Calibrated: 1/26/2018

Phantom: Twin-SAM V8.0_Left; Type: QD 000 P41 AA; Serial: 1935

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

1750 MHz System Verification at 20.0 dBm (100 mW)



Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 6.75 W/kg

SAR(1 g) = 3.81 W/kg; SAR(10 g) = 2.03 W/kg

Deviation(1 g) = 2.14%

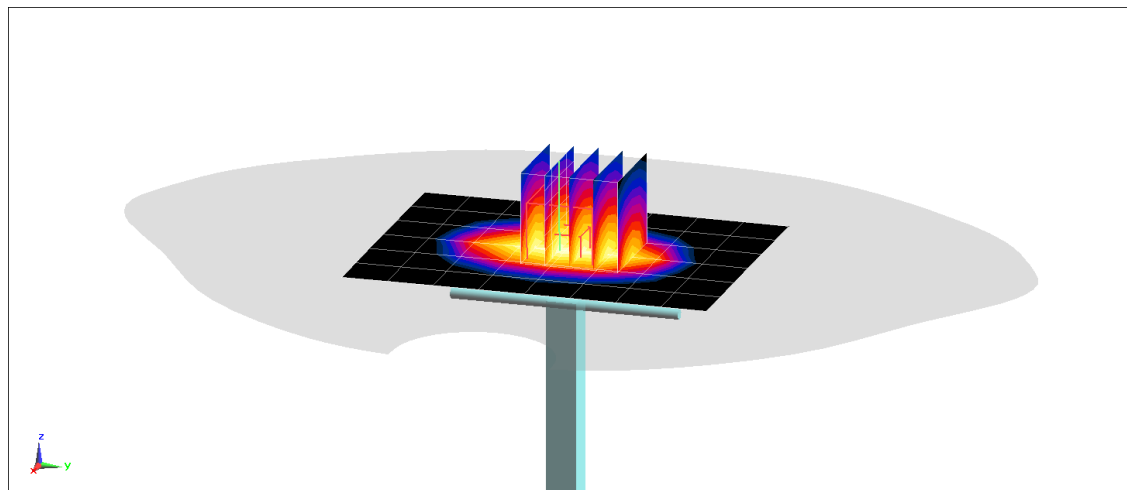

0 dB = 4.75 W/kg = 6.77 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d181

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$; $\sigma = 1.587 \text{ S/m}$; $\epsilon_r = 51.484$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 09-10-2018; Ambient Temp: 23.3°C; Tissue Temp: 22.2°C

Probe: ES3DV3 - SN3287; ConvF(5, 5, 5); Calibrated: 9/18/2017;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1533; Calibrated: 1/26/2018

Phantom: Twin-SAM V8.0_Left; Type: QD 000 P41 AA; Serial: 1935

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

1900 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 7.33 W/kg

SAR(1 g) = 4.08 W/kg; SAR(10 g) = 2.12 W/kg

Deviation(1 g) = 3.29%

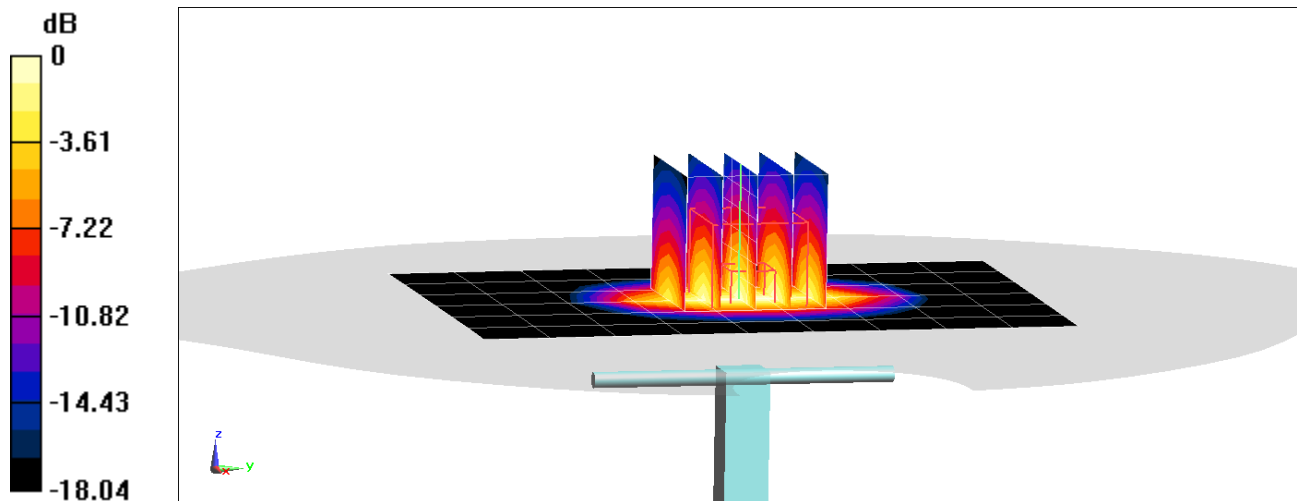

0 dB = 5.14 W/kg = 7.11 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d180

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$; $\sigma = 1.506 \text{ S/m}$; $\epsilon_r = 51.801$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 09-18-2018; Ambient Temp: 21.8°C; Tissue Temp: 21.7°C

Probe: ES3DV3 - SN3275; ConvF(4.85, 4.85, 4.85); Calibrated: 4/12/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn501; Calibrated: 4/12/2018

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CD; Serial: 1736

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

1900 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 6.66 W/kg

SAR(1 g) = 3.73 W/kg; SAR(10 g) = 1.93 W/kg

Deviation(1 g) = -5.57%

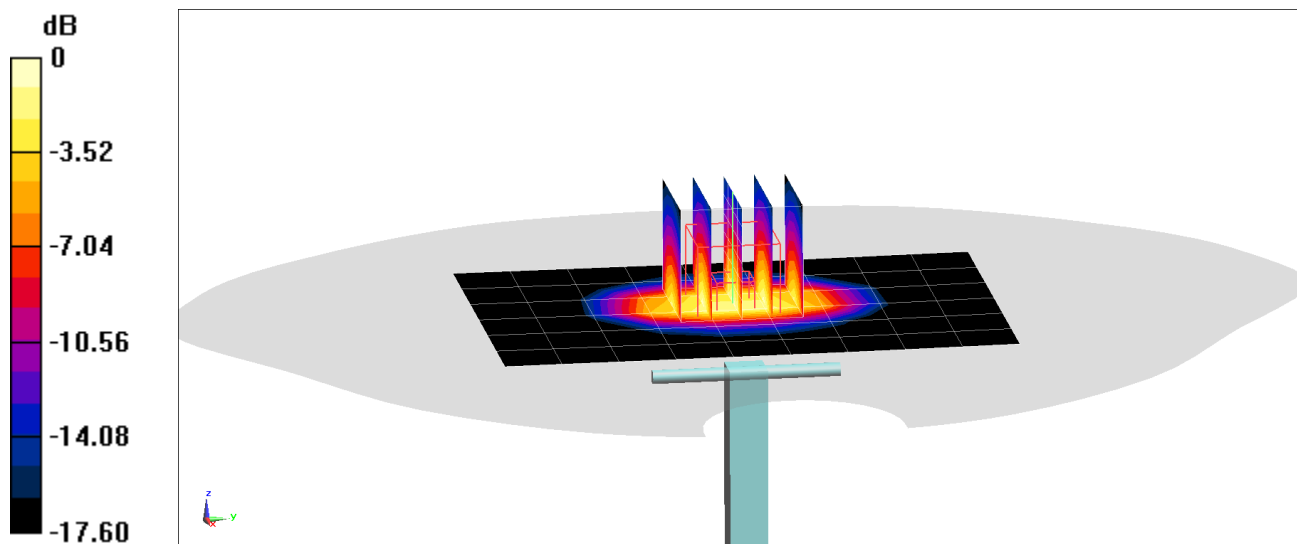

0 dB = 4.75 W/kg = 6.77 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: D2300V3 - SN1038; Type: D2300V3; Serial: 1038

Communication System: UID 0, CW; Frequency: 2300 MHz; Duty Cycle: 1:1

Medium: 2.3-2.6 Body Medium parameters used:

$f = 2300 \text{ MHz}$; $\sigma = 1.86 \text{ S/m}$; $\epsilon_r = 51.657$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 09-12-2018; Ambient Temp: 23.1°C; Tissue Temp: 22.1°C

Probe: ES3DV2 - SN3022; ConvF(4.36, 4.36, 4.36); Calibrated: 6/22/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn701; Calibrated: 6/18/2018

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CA; Serial: 1275

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

2300 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 9.22 W/kg

SAR(1 g) = 4.69 W/kg ; SAR(10 g) = 2.25 W/kg

Deviation(1 g) = 0.43%

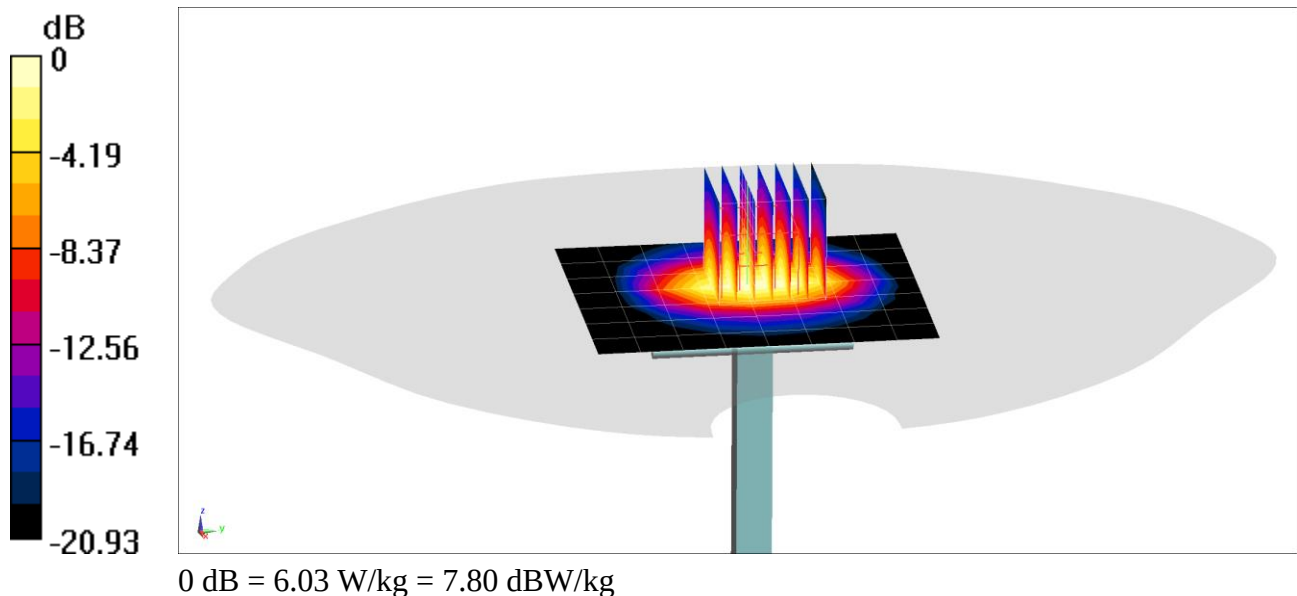

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 945

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2300-2600 Body Medium parameters used:

$f = 2450 \text{ MHz}$; $\sigma = 1.99 \text{ S/m}$; $\epsilon_r = 51.471$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 09-06-2018; Ambient Temp: 21.0°C; Tissue Temp: 21.3°C

Probe: ES3DV3 - SN3275; ConvF(4.57, 4.57, 4.57); Calibrated: 4/12/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn501; Calibrated: 4/12/2018

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CD; Serial: 1736

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

2450 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 10.4 W/kg

SAR(1 g) = 5.24 W/kg; SAR(10 g) = 2.43 W/kg

Deviation(1 g) = 6.07%

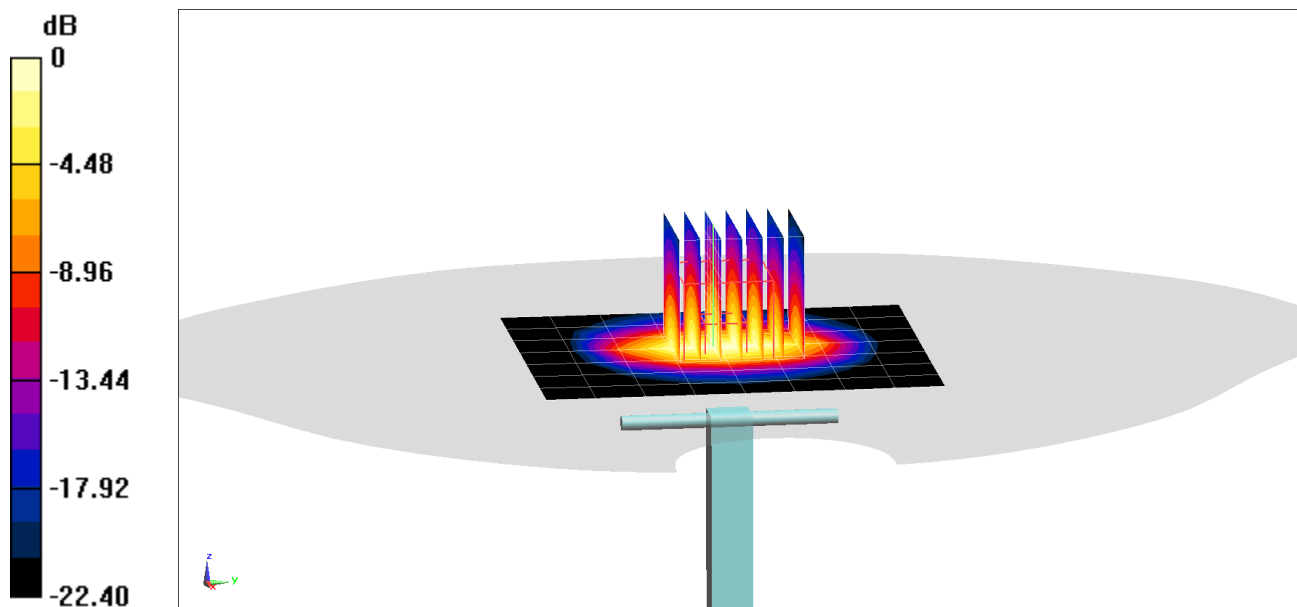

0 dB = 6.84 W/kg = 8.35 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 750

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450-2600 Body Medium parameters used:

$f = 2450$ MHz; $\sigma = 1.969$ S/m; $\epsilon_r = 51.476$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 09-10-2018; Ambient Temp: 22.6°C; Tissue Temp: 22.0°C

Probe: ES3DV3 - SN3329; ConvF(4.5, 4.5, 4.5); Calibrated: 2/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1403; Calibrated: 2/8/2018

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

2450 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 11.8 W/kg

SAR(1 g) = 5.46 W/kg; SAR(10 g) = 2.49 W/kg

Deviation(1 g) = 6.64%

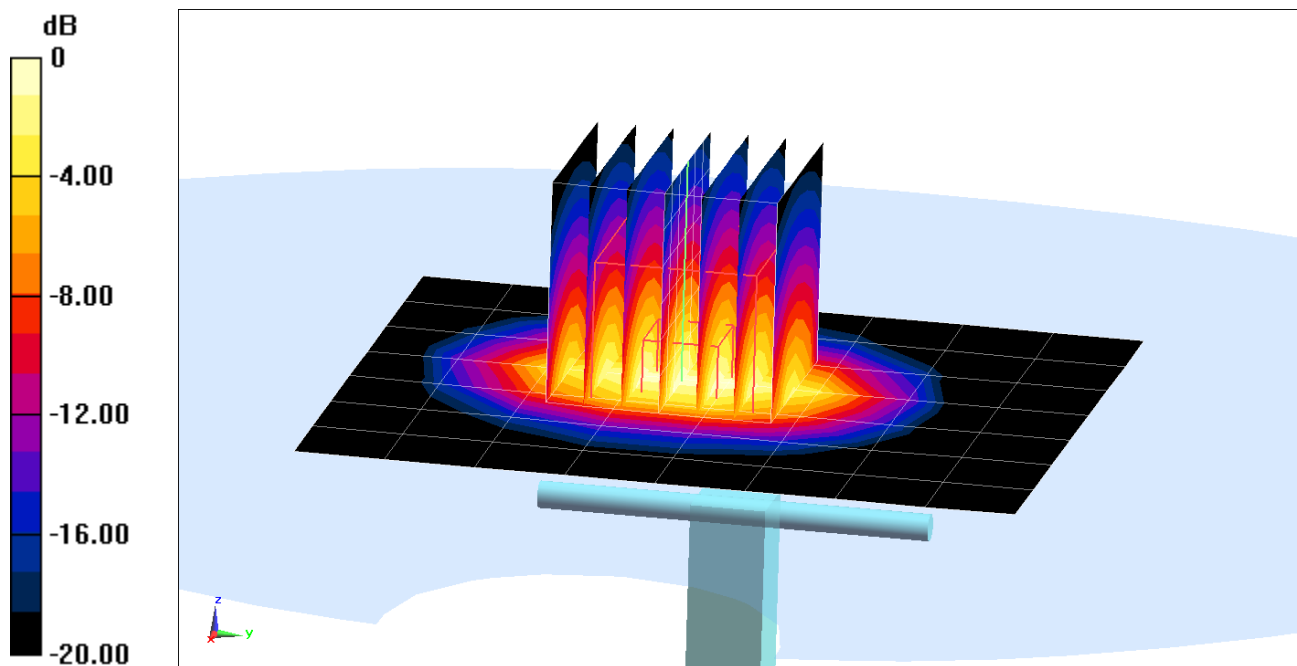

0 dB = 7.18 W/kg = 8.56 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 750

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2.3-2.6 Body Medium parameters used:

$f = 2450 \text{ MHz}$; $\sigma = 2.034 \text{ S/m}$; $\epsilon_r = 51.508$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 09-10-2018; Ambient Temp: 22.3°C; Tissue Temp: 22.1°C

Probe: ES3DV2 - SN3022; ConvF(4.22, 4.22, 4.22); Calibrated: 6/22/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn701; Calibrated: 6/18/2018

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CA; Serial: 1275

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

2450 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 10.8 W/kg

SAR(1 g) = 5.18 W/kg; SAR(10 g) = 2.39 W/kg

Deviation(1 g) = 1.17%

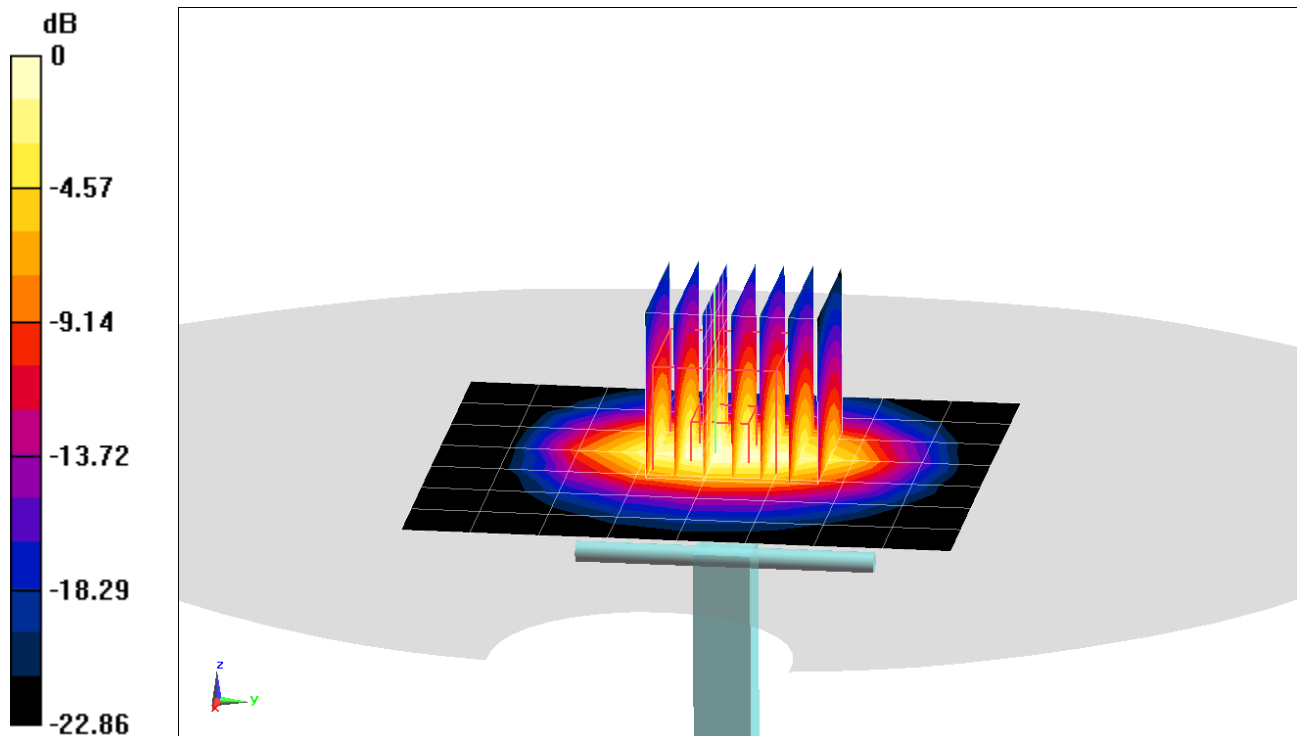

0 dB = 6.73 W/kg = 8.28 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 921

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used:

$f = 2450 \text{ MHz}$; $\sigma = 2.046 \text{ S/m}$; $\epsilon_r = 51.496$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 09-21-2018; Ambient Temp: 23.1°C; Tissue Temp: 21.3°C

Probe: ES3DV2 - SN3022; ConvF(4.22, 4.22, 4.22); Calibrated: 6/22/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn701; Calibrated: 6/18/2018

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CA; Serial: 1275

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

2450 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 10.7 W/kg

SAR(1 g) = 5.2 W/kg; SAR(10 g) = 2.42 W/kg

Deviation(1 g) = 2.56%

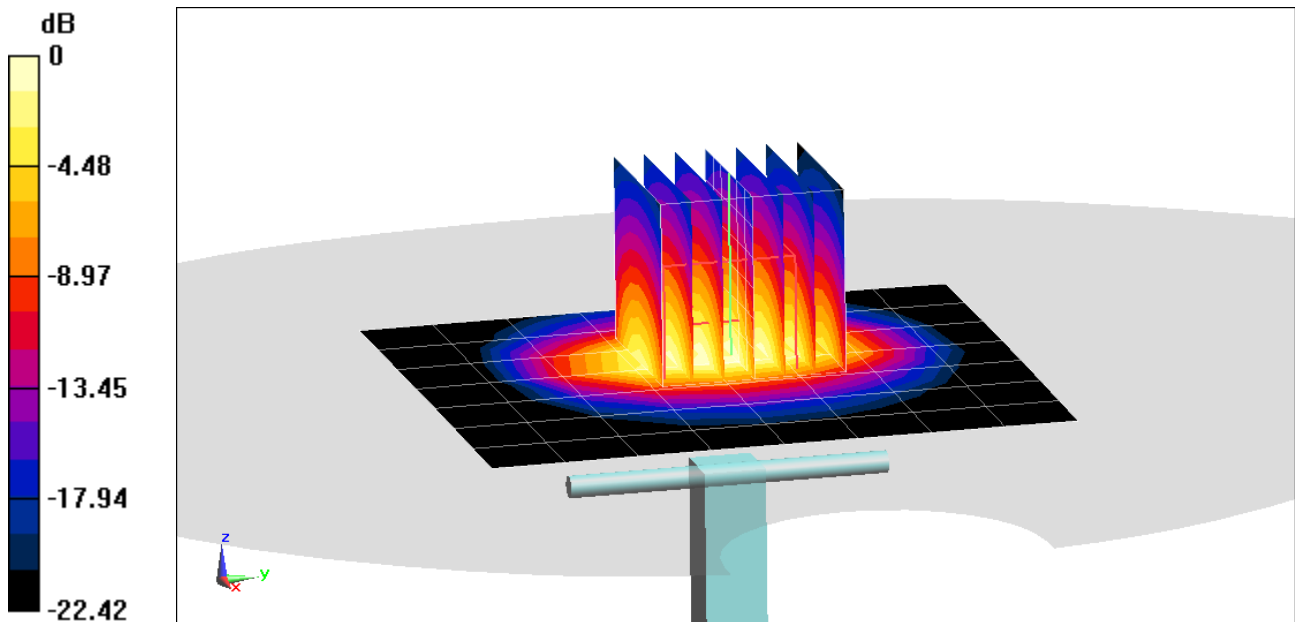

0 dB = 6.81 W/kg = 8.33 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: 1009

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: 2.3-2.6 Body Medium parameters used:

$f = 2600 \text{ MHz}$; $\sigma = 2.213 \text{ S/m}$; $\epsilon_r = 51.02$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 09-10-2018; Ambient Temp: 22.3°C; Tissue Temp: 22.1°C

Probe: ES3DV2 - SN3022; ConvF(4.03, 4.03, 4.03); Calibrated: 6/22/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn701; Calibrated: 6/18/2018

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CA; Serial: 1275

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

2600 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 12.9 W/kg

SAR(1 g) = 5.81 W/kg; SAR(10 g) = 2.56 W/kg

Deviation(1 g) = 4.68%

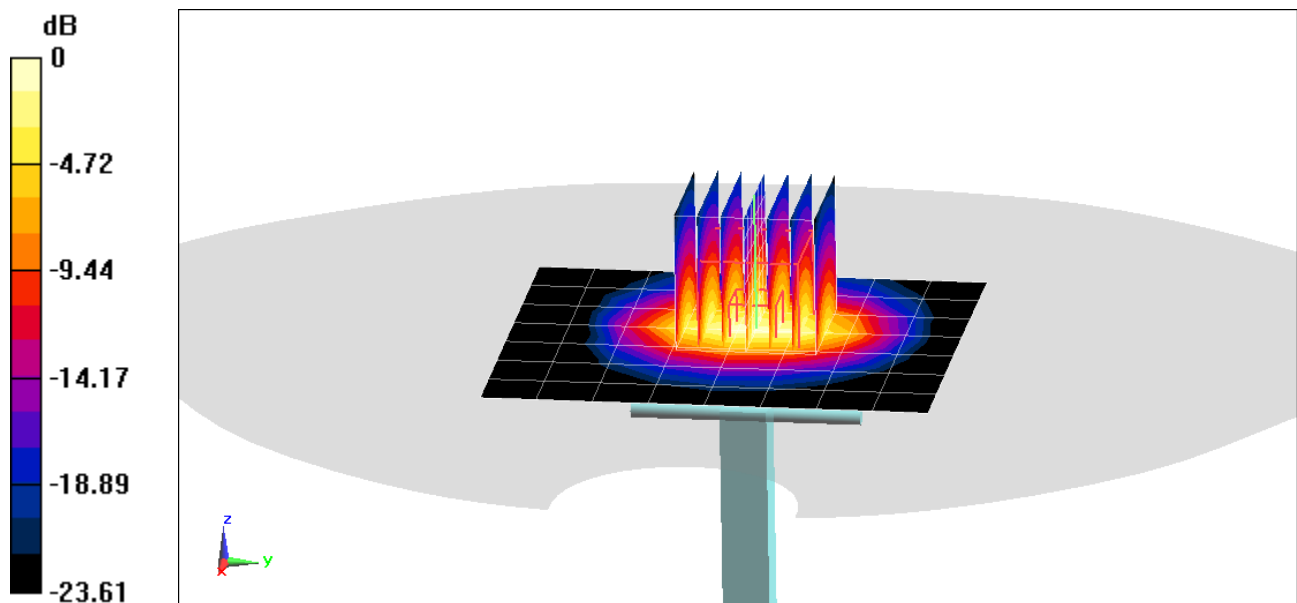

0 dB = 7.82 W/kg = 8.93 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: 1009

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: 2450-2600 Body Medium parameters used:

$f = 2600$ MHz; $\sigma = 2.174$ S/m; $\epsilon_r = 50.929$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 09-10-2018; Ambient Temp: 22.6°C; Tissue Temp: 22.0°C

Probe: ES3DV3 - SN3329; ConvF(4.25, 4.25, 4.25); Calibrated: 2/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1403; Calibrated: 2/8/2018

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

2600 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 12.8 W/kg

SAR(1 g) = 5.89 W/kg; SAR(10 g) = 2.6 W/kg

Deviation(1 g) = 6.13%

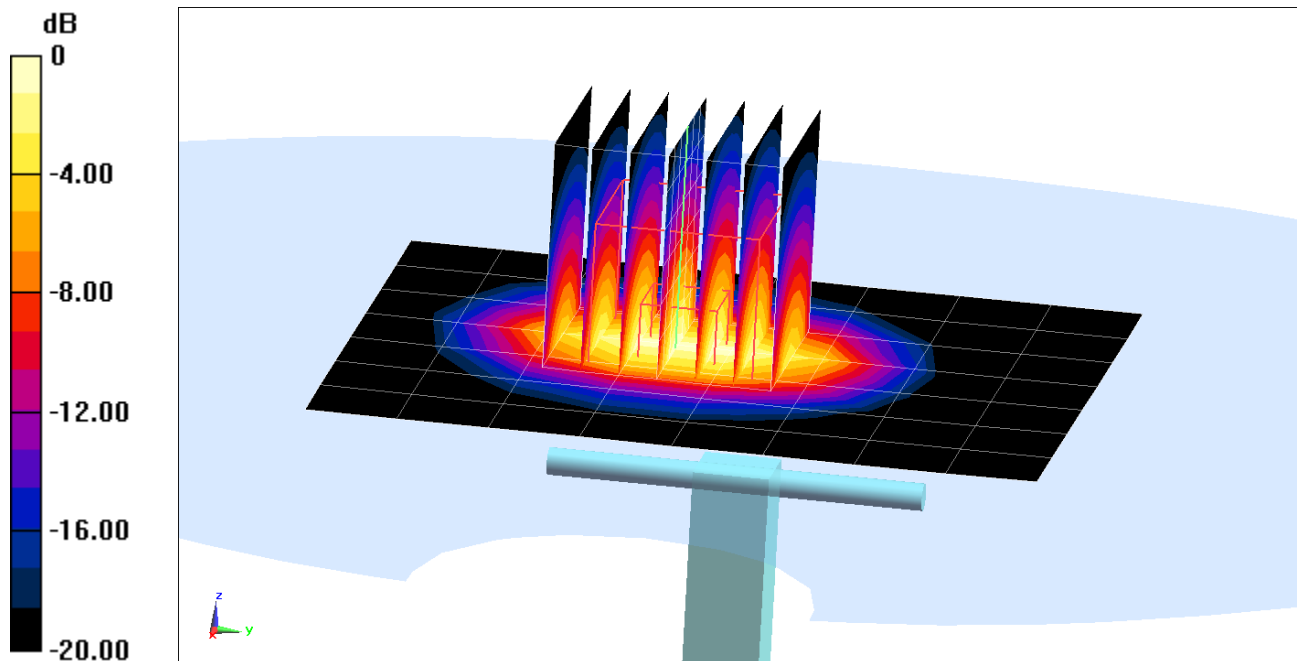

0 dB = 7.85 W/kg = 8.95 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: D5GHzV2; Type: D5GHzV2; Serial: 1123

Communication System: UID 0, CW; Frequency: 5250 MHz; Duty Cycle: 1:1

Medium: 5GHz Body Medium parameters used (interpolated):

$f = 5250 \text{ MHz}$; $\sigma = 5.448 \text{ S/m}$; $\epsilon_r = 47.45$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 09-18-2018; Ambient Temp: 24.4°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN3837; ConvF(4.84, 4.84, 4.84); Calibrated: 3/16/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn604; Calibrated: 3/7/2018

Phantom: SAM Sub; Type: QD 000 P40 CC; Serial: 1375

Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

5250 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 15.3 W/kg

SAR(1 g) = 3.67 W/kg; SAR(10 g) = 1.01 W/kg

Deviation(1 g) = -0.81%

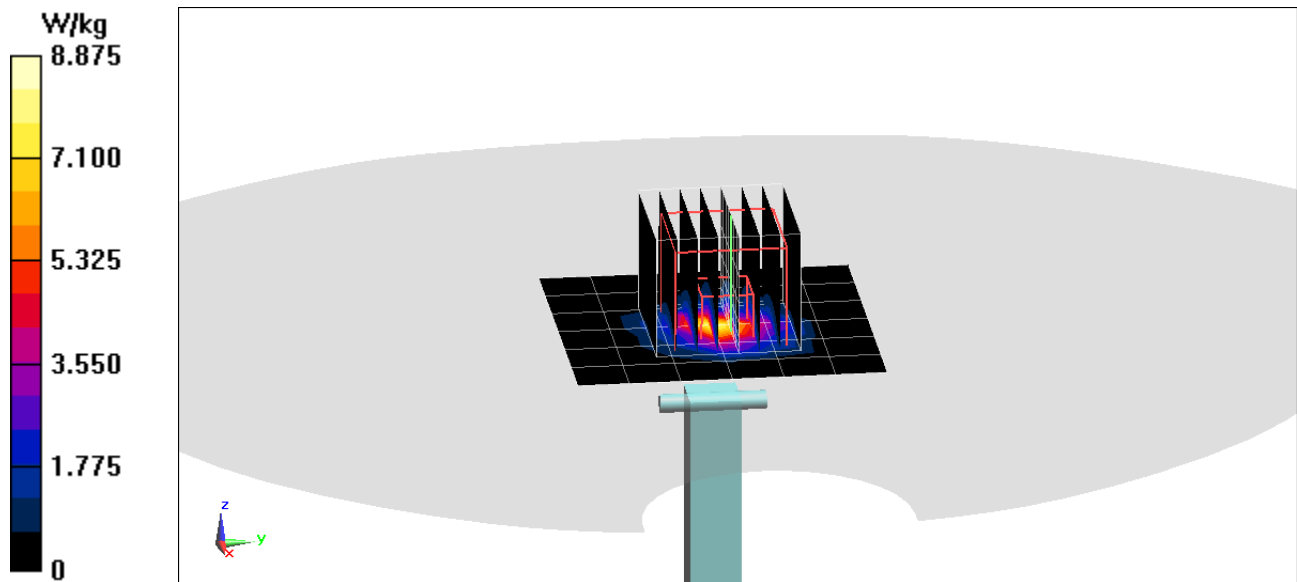

PCTEST ENGINEERING LABORATORY, INC.

DUT: D5GHzV2; Type: D5GHzV2; Serial: 1123

Communication System: UID 0, CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: 5GHz Body Medium parameters used:

$f = 5600 \text{ MHz}$; $\sigma = 5.895 \text{ S/m}$; $\epsilon_r = 46.882$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 09-18-2018; Ambient Temp: 24.4°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN3837; ConvF(4.13, 4.13, 4.13); Calibrated: 3/16/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn604; Calibrated: 3/7/2018

Phantom: SAM Sub; Type: QD 000 P40 CC; Serial: 1375

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

5600 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 16.2 W/kg

SAR(1 g) = 3.66 W/kg; SAR(10 g) = 1 W/kg

Deviation(1 g) = -5.67%

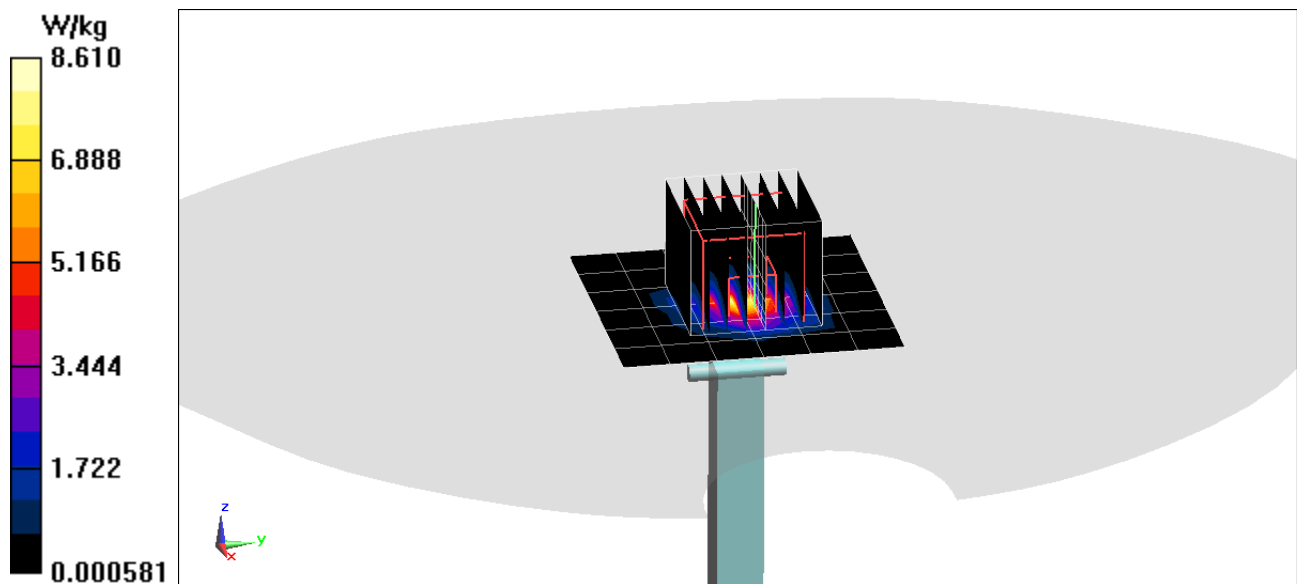

PCTEST ENGINEERING LABORATORY, INC.

DUT: D5GHzV2; Type: D5GHzV2; Serial: 1123

Communication System: UID 0, CW; Frequency: 5750 MHz; Duty Cycle: 1:1

Medium: 5GHz Body Medium parameters used (interpolated):

$f = 5750 \text{ MHz}$; $\sigma = 6.128 \text{ S/m}$; $\epsilon_r = 46.626$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 09-18-2018; Ambient Temp: 24.4°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN3837; ConvF(4.43, 4.43, 4.43); Calibrated: 3/16/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn604; Calibrated: 3/7/2018

Phantom: SAM Sub; Type: QD 000 P40 CC; Serial: 1375

Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

5750 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 16.2 W/kg

SAR(1 g) = 3.55 W/kg; SAR(10 g) = 0.969 W/kg

Deviation(1 g) = -4.95%

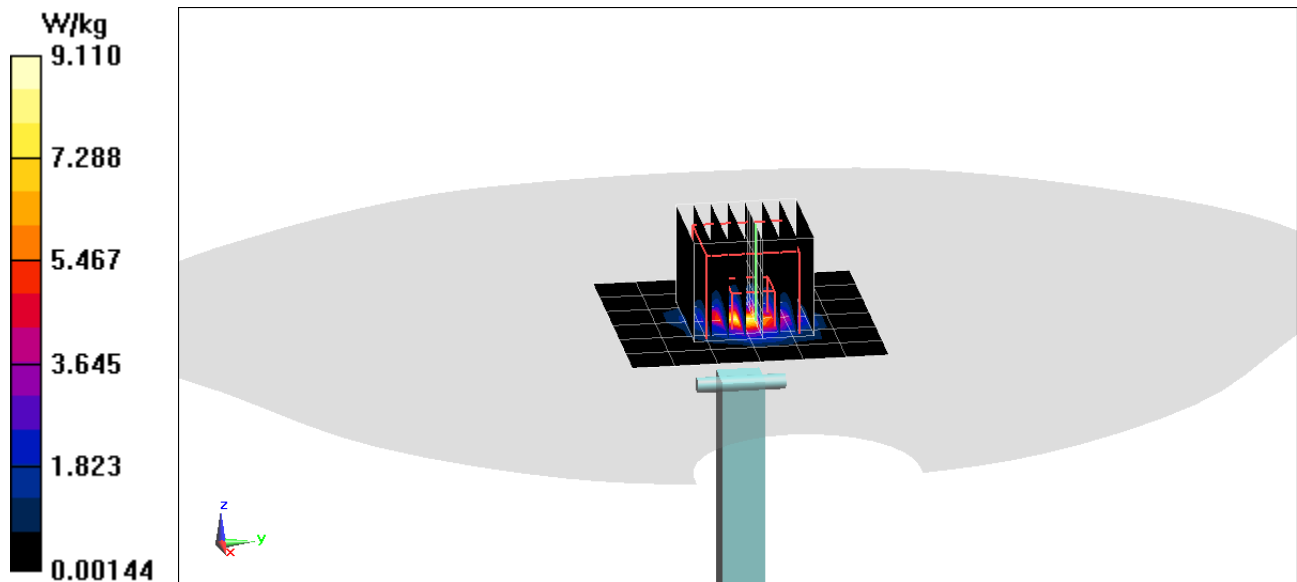

APPENDIX C: PROBE CALIBRATION



Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D750V3-1034_May18**

CALIBRATION CERTIFICATE

Object **D750V3 - SN:1034**

Calibration procedure(s) **QA CAL-05.v10**
Calibration procedure for dipole validation kits above 700 MHz

SC ✓
 5/31/2018

Calibration date: **May 18, 2018**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-18 (No. 217-02672/02673)	Apr-19
Power sensor NRP-Z91	SN: 103244	04-Apr-18 (No. 217-02672)	Apr-19
Power sensor NRP-Z91	SN: 103245	04-Apr-18 (No. 217-02673)	Apr-19
Reference 20 dB Attenuator	SN: 5058 (20k)	04-Apr-18 (No. 217-02682)	Apr-19
Type-N mismatch combination	SN: 5047.2 / 06327	04-Apr-18 (No. 217-02683)	Apr-19
Reference Probe EX3DV4	SN: 7349	30-Dec-17 (No. EX3-7349_Dec17)	Dec-18
DAE4	SN: 601	26-Oct-17 (No. DAE4-601_Oct17)	Oct-18
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-16)	In house check: Oct-18
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-17)	In house check: Oct-18

Calibrated by: **Manu Seitz** **Laboratory Technician**

Signature

Approved by: **Katja Pokovic** **Technical Manager**

Issued: May 22, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.1
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	750 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.9	0.89 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	41.0 $\pm$ 6 %	0.89 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.09 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	8.32 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.36 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	5.42 W/kg $\pm$ 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.5	0.96 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	54.7 $\pm$ 6 %	0.96 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.15 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	8.57 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.42 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	5.67 W/kg $\pm$ 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	55.3 Ω + 0.0 j Ω
Return Loss	- 26.0 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	50.0 Ω - 3.2 j Ω
Return Loss	- 29.8 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.034 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	July 06, 2011

DASY5 Validation Report for Head TSL

Date: 17.05.2018

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN:1034

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used: $f = 750$ MHz; $\sigma = 0.89$ S/m; $\epsilon_r = 41$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(10.22, 10.22, 10.22) @ 750 MHz; Calibrated: 30.12.2017
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 4.9 (front); Type: QD 00L P49 AA; Serial: 1001
- DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:



Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 59.66 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 3.18 W/kg


SAR(1 g) = 2.09 W/kg; SAR(10 g) = 1.36 W/kg

Maximum value of SAR (measured) = 2.82 W/kg

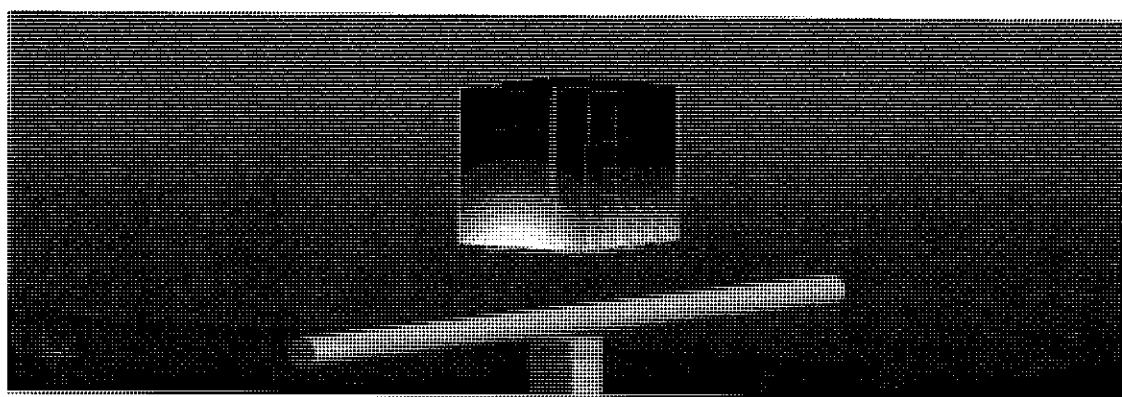

0 dB = 2.82 W/kg = 4.50 dBW/kg

Impedance Measurement Plot for Head TSL

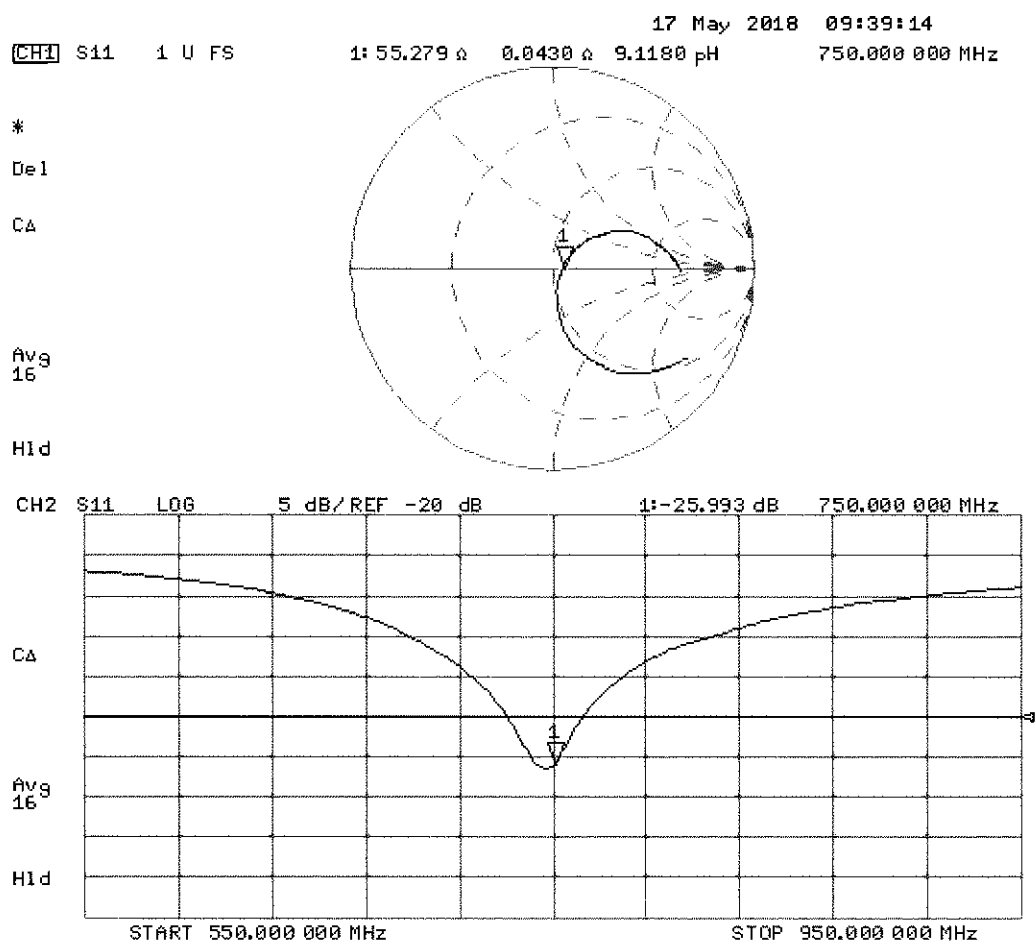

DASY5 Validation Report for Body TSL

Date: 18.05.2018

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN:1034

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.96 \text{ S/m}$; $\epsilon_r = 54.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(10.19, 10.19, 10.19) @ 750 MHz; Calibrated: 30.12.2017
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 4.9 (Back); Type: QD 00R P49 AA; Serial: 1005
- DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 57.60 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 3.16 W/kg

SAR(1 g) = 2.15 W/kg; SAR(10 g) = 1.42 W/kg

Maximum value of SAR (measured) = 2.83 W/kg

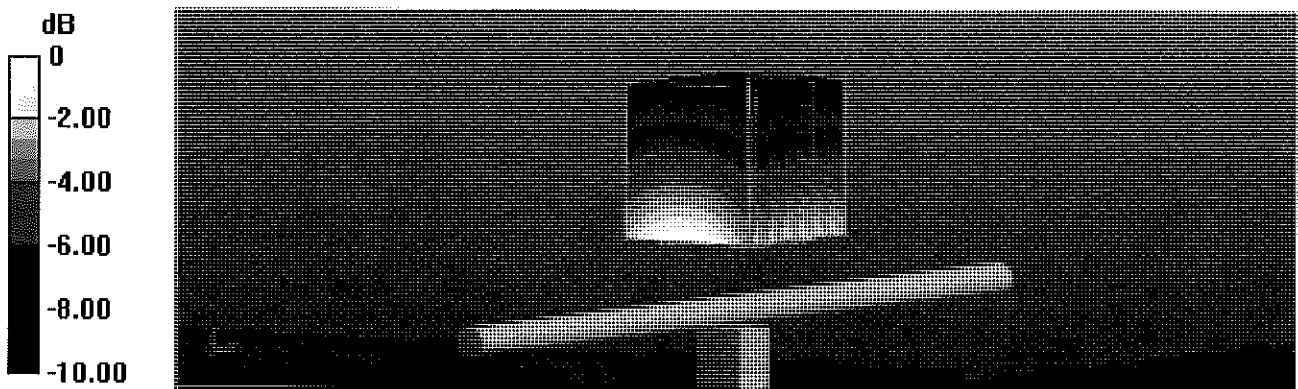


0 dB = 2.83 W/kg = 4.52 dBW/kg

Impedance Measurement Plot for Body TSL

18 May 2018 09:54:01
CH1 S11 1 U FS 1: 49.951 $\angle$ -3.2324 $\angle$ 65.649 pF 750.000 000 MHz

*
De1
Cor

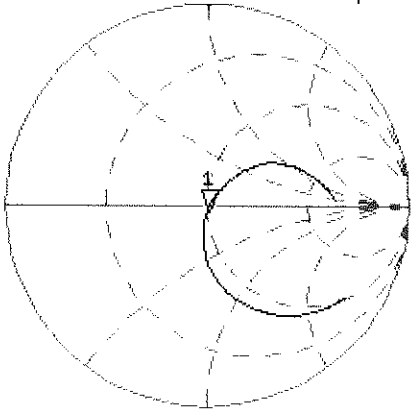


Avg
16
H1d

CH2 S11 LOG 5 dB/ REF -20 dB 1: -29.809 dB 750.000 000 MHz

Cor

Avg
16

H1d

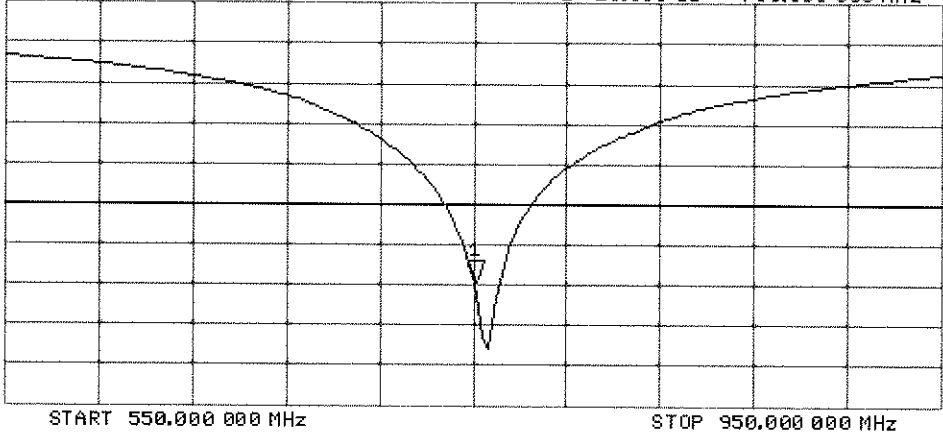



Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D750V3-1057_Jun17**

CALIBRATION CERTIFICATE

Object **D750V3 - SN:1057**

Calibration procedure(s) **QA CAL-05.v9**
 Calibration procedure for dipole validation kits above 700 MHz

Calibration date: **June 13, 2017**

BNW
8/3/2017
SC ✓
6/1/2018

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^\circ\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-17 (No. 217-02521/02522)	Apr-18
Power sensor NRP-Z91	SN: 103244	04-Apr-17 (No. 217-02521)	Apr-18
Power sensor NRP-Z91	SN: 103245	04-Apr-17 (No. 217-02522)	Apr-18
Reference 20 dB Attenuator	SN: 5058 (20k)	07-Apr-17 (No. 217-02528)	Apr-18
Type-N mismatch combination	SN: 5047.2 / 06327	07-Apr-17 (No. 217-02529)	Apr-18
Reference Probe EX3DV4	SN: 7349	31-May-17 (No. EX3-7349_May17)	May-18
DAE4	SN: 601	28-Mar-17 (No. DAE4-601_Mar17)	Mar-18

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-16)	In house check: Oct-18
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-16)	In house check: Oct-17

Calibrated by: **Johannes Kurikka** Name: **Johannes Kurikka** Function: **Laboratory Technician**

Approved by: **Kalja Pokovic** Name: **Kalja Pokovic** Function: **Technical Manager**

Signature

[Signature]

[Signature]

Issued: June 15, 2017

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.0
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	750 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.9	0.89 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	41.2 $\pm$ 6 %	0.91 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.12 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	8.31 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.37 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	5.39 W/kg $\pm$ 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.5	0.96 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	54.8 $\pm$ 6 %	0.97 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.22 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	8.79 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.46 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	5.79 W/kg $\pm$ 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	55.9 Ω + 0.1 j Ω
Return Loss	- 25.0 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	51.2 Ω - 2.3 j Ω
Return Loss	- 32.0 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.035 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	November 08, 2011

DASY5 Validation Report for Head TSL

Date: 13.06.2017

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN:1057

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.91 \text{ S/m}$; $\epsilon_r = 41.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(10.49, 10.49, 10.49); Calibrated: 31.05.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 4.9 (front); Type: QD 00L P49 AA; Serial: 1001
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Head Tissue/Pin=250 mW, $d=15\text{mm}$ /Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 58.79 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 3.29 W/kg

SAR(1 g) = 2.12 W/kg; SAR(10 g) = 1.37 W/kg

Maximum value of SAR (measured) = 2.88 W/kg



Impedance Measurement Plot for Head TSL

13 Jun 2017 12:28:02
 [CH1] S11 1 U FS 1: 55.930 Ω 0.0645 Ω 13.677 μH 750.000 000 MHz


*

De1

CA

Avg
16

H1d

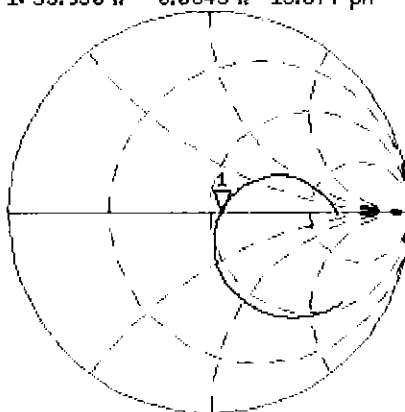


CH2 S11 LOG 5 dB/REF -20 dB 1:-25.037 dB 750.000 000 MHz

CA

Avg
16

H1d

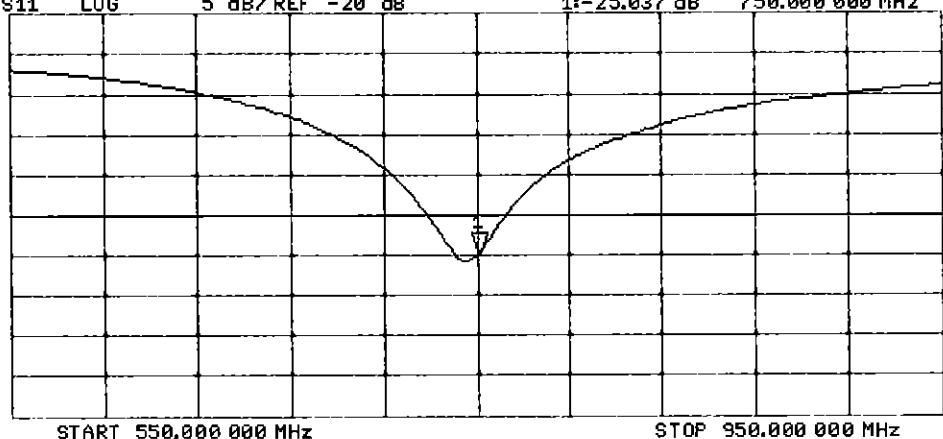

DASY5 Validation Report for Body TSL

Date: 12.06.2017

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN:1057

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used: $f = 750$ MHz; $\sigma = 0.97$ S/m; $\epsilon_r = 54.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(10.35, 10.35, 10.35); Calibrated: 31.05.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 4.9 (Back); Type: QD 00R P49 AA; Serial: 1005
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 57.76 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 3.34 W/kg

SAR(1 g) = 2.22 W/kg; SAR(10 g) = 1.46 W/kg

Maximum value of SAR (measured) = 2.93 W/kg

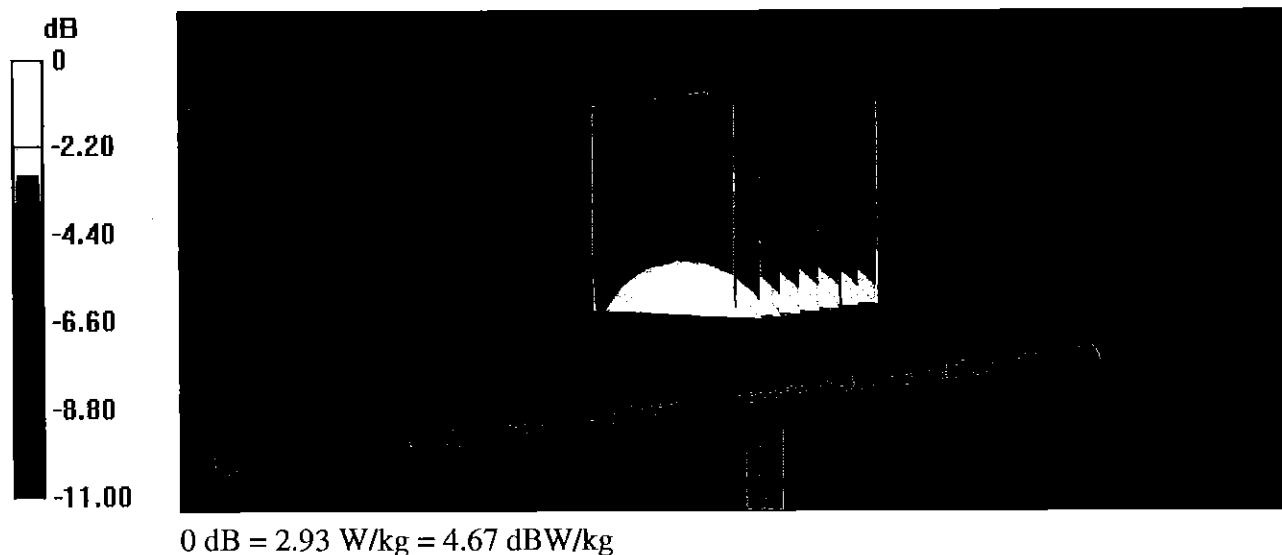

Impedance Measurement Plot for Body TSL

