


## 7.6.11 CDD Radiated Band Edge Measurements (40MHz BW)


§15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

Worst Case Mode: 802.11n  
Worst Case Transfer Rate: MCS0  
Distance of Measurements: 3 Meters  
Operating Frequency: 5190MHz  
Channel: 38

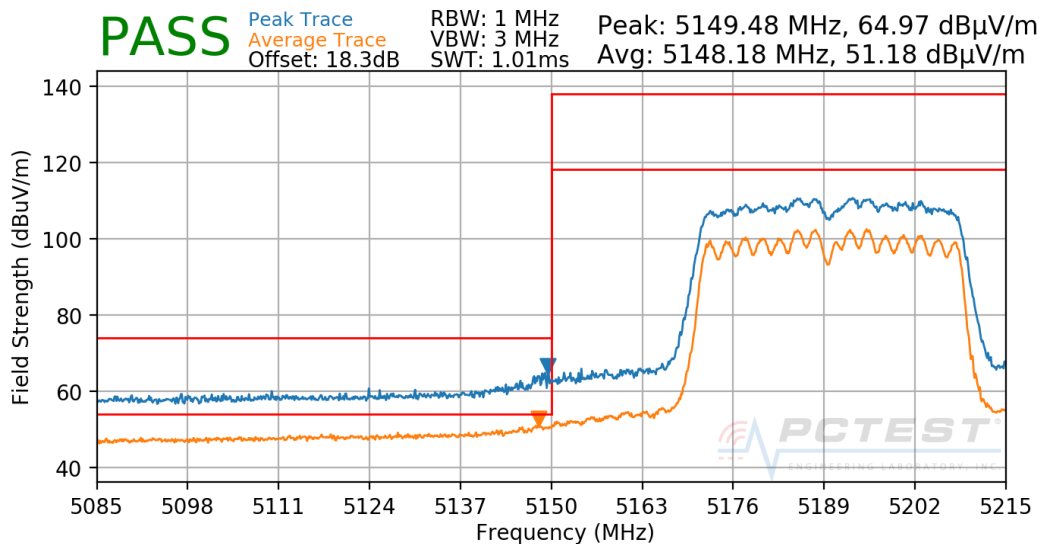

Plot 7-272. Radiated Lower Band Edge Plot CDD (UNII Band 1)


Worst Case Mode: 802.11n  
Worst Case Transfer Rate: MCS0  
Distance of Measurements: 3 Meters  
Operating Frequency: 5230MHz  
Channel: 46

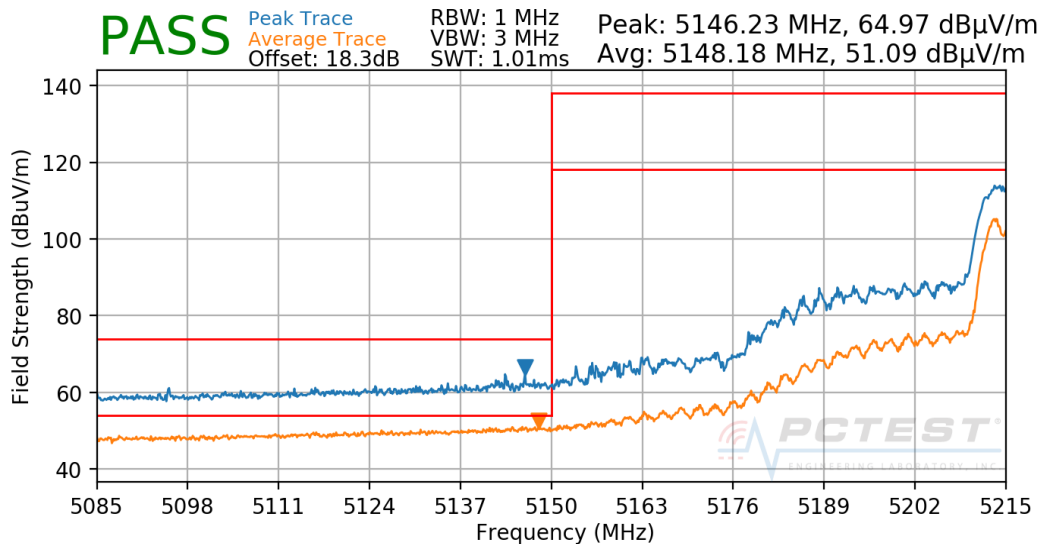

Plot 7-273. Radiated Lower Band Edge Plot CDD (UNII Band 1)


|                                         |                                               |                            |                                 |
|-----------------------------------------|-----------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2014                        | <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-10.BCG | Test Dates:<br>07/26/2018 - 10/10/2018        | EUT Type:<br>Tablet Device | Page 190 of 206                 |

Worst Case Mode: 802.11n  
Worst Case Transfer Rate: MCS0  
Distance of Measurements: 3 Meters  
Operating Frequency: 5270MHz  
Channel: 54

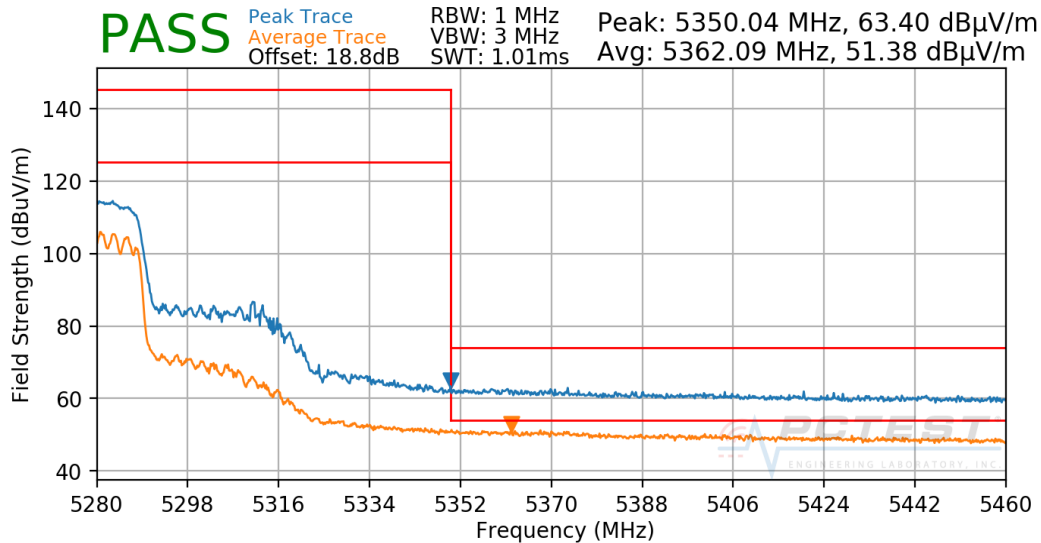

**Plot 7-274. Radiated Upper Band Edge Plot CDD (UNII Band 2A)**


Worst Case Mode: 802.11n  
Worst Case Transfer Rate: MCS0  
Distance of Measurements: 3 Meters  
Operating Frequency: 5310MHz  
Channel: 62

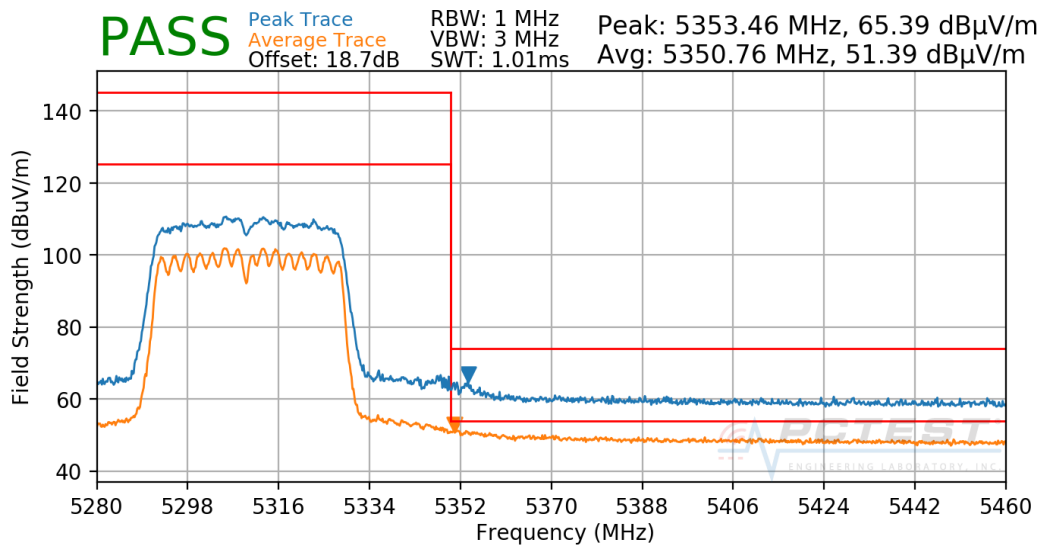

**Plot 7-275. Radiated Upper Band Edge Plot CDD (UNII Band 2A)**


|                                         |                                               |                            |                                       |                                 |
|-----------------------------------------|-----------------------------------------------|----------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2014                        | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. |                            | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-10.BCG | Test Dates:<br>07/26/2018 - 10/10/2018        | EUT Type:<br>Tablet Device |                                       | Page 191 of 206                 |

Worst Case Mode: 802.11n  
Worst Case Transfer Rate: MCS0  
Distance of Measurements: 3 Meters  
Operating Frequency: 5510MHz  
Channel: 102

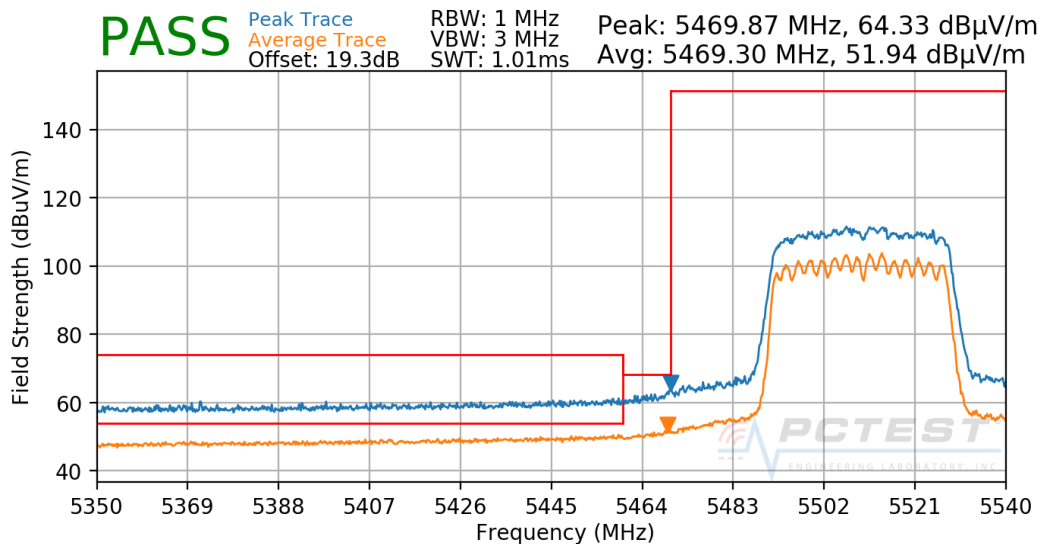

**Plot 7-276. Radiated Lower Band Edge Plot CDD (UNII Band 2C)**


Worst Case Mode: 802.11n  
Worst Case Transfer Rate: MCS0  
Distance of Measurements: 3 Meters  
Operating Frequency: 5550MHz  
Channel: 110

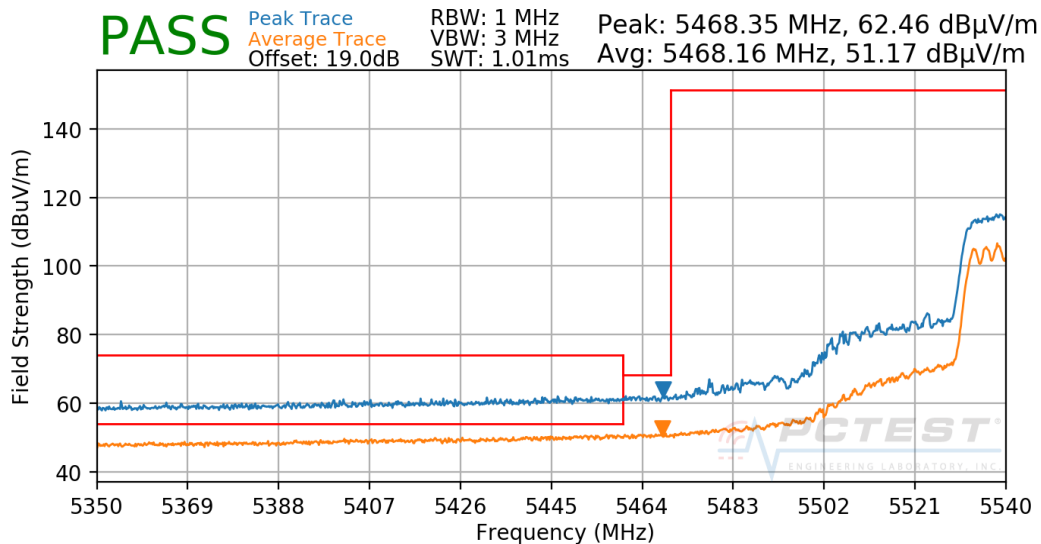

**Plot 7-277. Radiated Lower Band Edge Plot CDD (Peak - UNII Band 2C)**


|                                         |                                               |                            |                                 |
|-----------------------------------------|-----------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2014                        | <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-10.BCG | Test Dates:<br>07/26/2018 - 10/10/2018        | EUT Type:<br>Tablet Device | Page 192 of 206                 |

Worst Case Mode: 802.11n  
Worst Case Transfer Rate: MCS0  
Distance of Measurements: 3 Meters  
Operating Frequency: 5630MHz  
Channel: 126

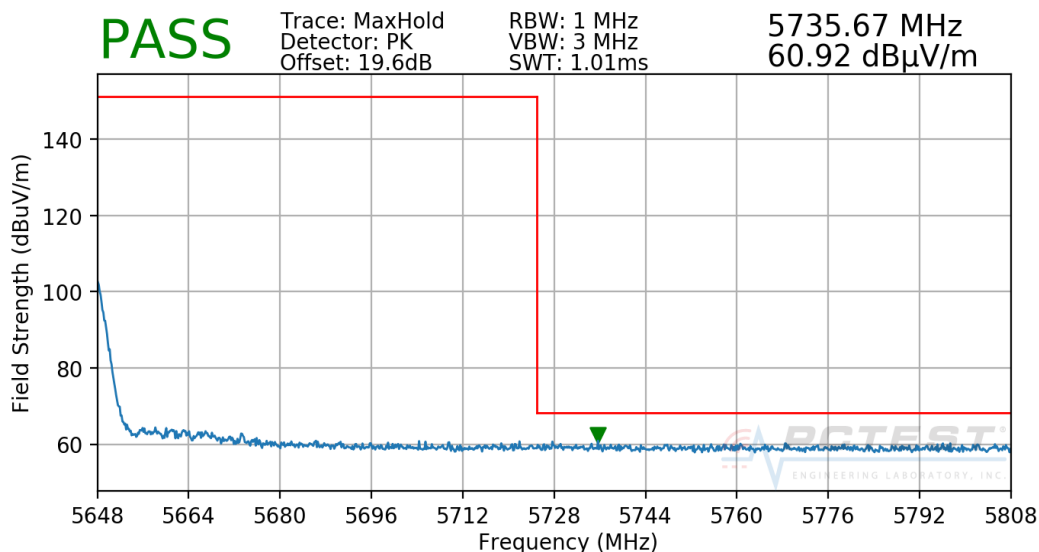

**Plot 7-278. Radiated Upper Band Edge Plot CDD (Peak - UNII Band 2C)**


Worst Case Mode: 802.11n  
Worst Case Transfer Rate: MCS0  
Distance of Measurements: 3 Meters  
Operating Frequency: 5670MHz  
Channel: 134

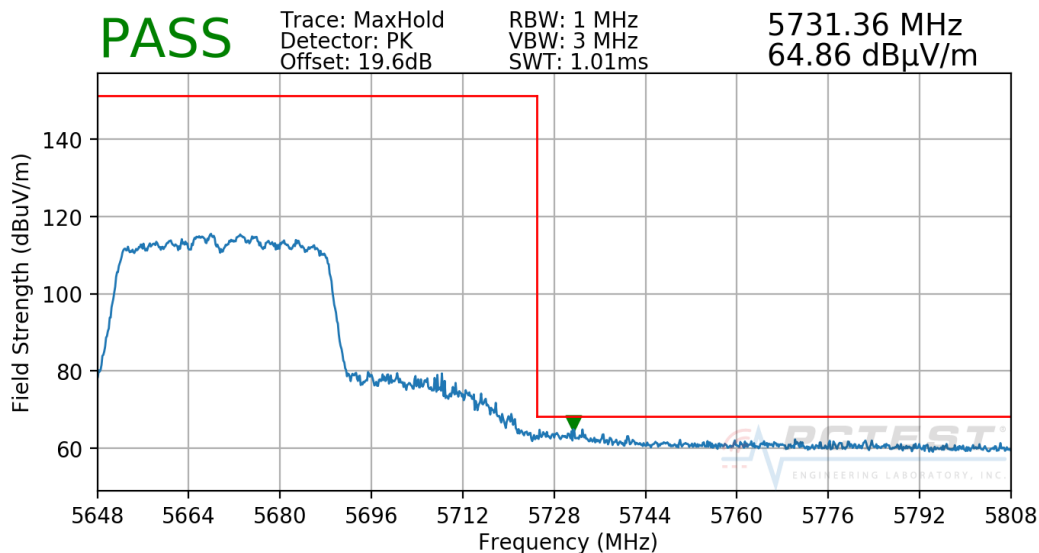

**Plot 7-279. Radiated Upper Band Edge Plot CDD (Peak - UNII Band 2C)**


|                                         |                                               |                            |                                       |                                 |
|-----------------------------------------|-----------------------------------------------|----------------------------|---------------------------------------|---------------------------------|
| FCC ID: BCGA2014                        | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. |                            | MEASUREMENT REPORT<br>(CERTIFICATION) | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-10.BCG | Test Dates:<br>07/26/2018 - 10/10/2018        | EUT Type:<br>Tablet Device |                                       | Page 193 of 206                 |

Worst Case Mode: 802.11n  
Worst Case Transfer Rate: MCS0  
Distance of Measurements: 3 Meters  
Operating Frequency: 5755MHz  
Channel: 151

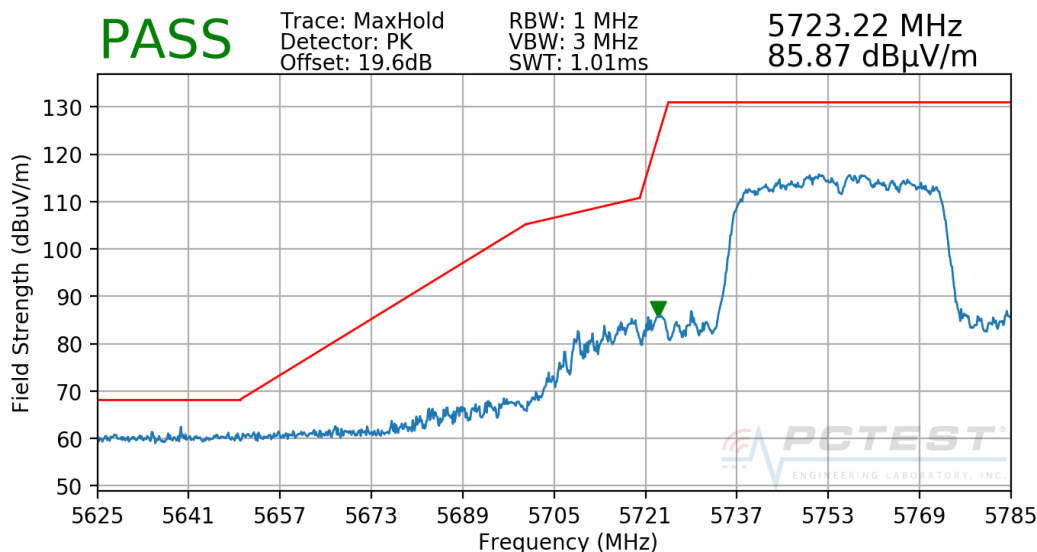

**Plot 7-280. Radiated Lower Band Edge Plot CDD (Peak - UNII Band 3)**

Worst Case Mode: 802.11n  
Worst Case Transfer Rate: MCS0  
Distance of Measurements: 3 Meters  
Operating Frequency: 5795MHz  
Channel: 159

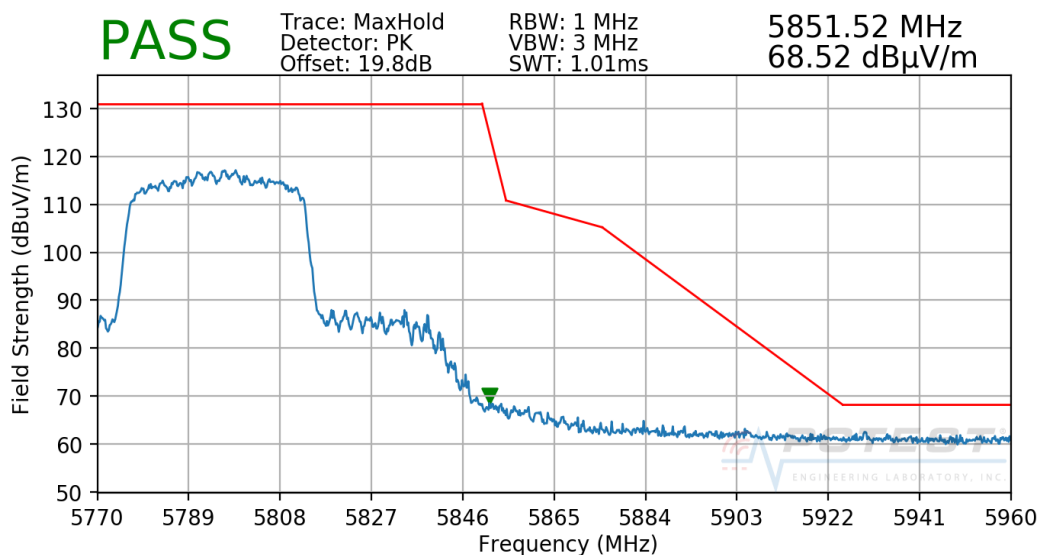


**Plot 7-281. Radiated Upper Band Edge Plot CDD (Peak - UNII Band 3)**

|                                         |                                               |                            |                                 |
|-----------------------------------------|-----------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2014                        | <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-10.BCG | Test Dates:<br>07/26/2018 - 10/10/2018        | EUT Type:<br>Tablet Device | Page 194 of 206                 |

## 7.6.12 CDD Radiated Band Edge Measurements (80MHz BW)


§15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

Worst Case Mode: 802.11ac  
Worst Case Transfer Rate: MCS0  
Distance of Measurements: 3 Meters  
Operating Frequency: 5210MHz  
Channel: 42

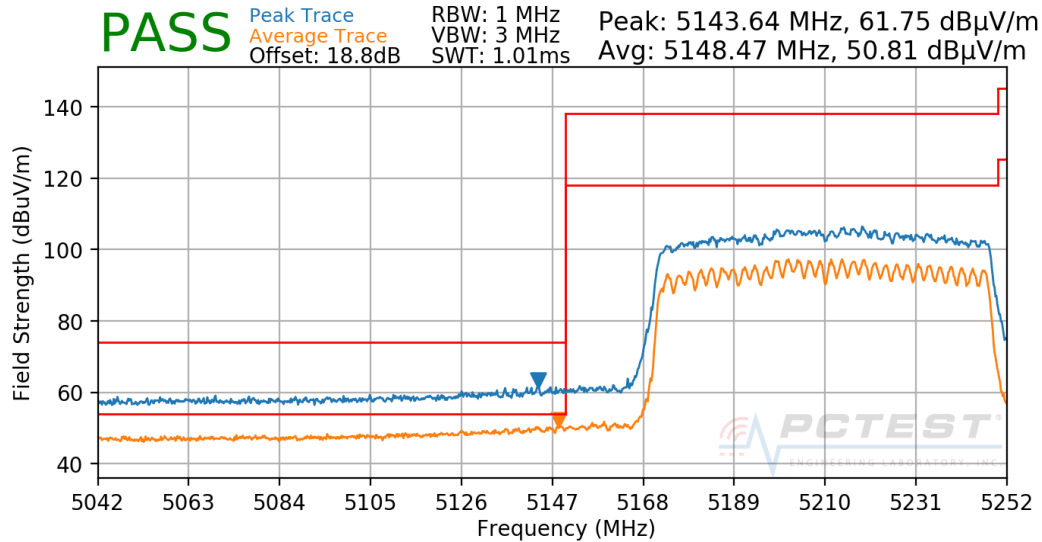

Plot 7-282. Radiated Lower Band Edge Plot CDD (UNII Band 1)


Worst Case Mode: 802.11ac  
Worst Case Transfer Rate: MCS0  
Distance of Measurements: 3 Meters  
Operating Frequency: 5290MHz  
Channel: 58

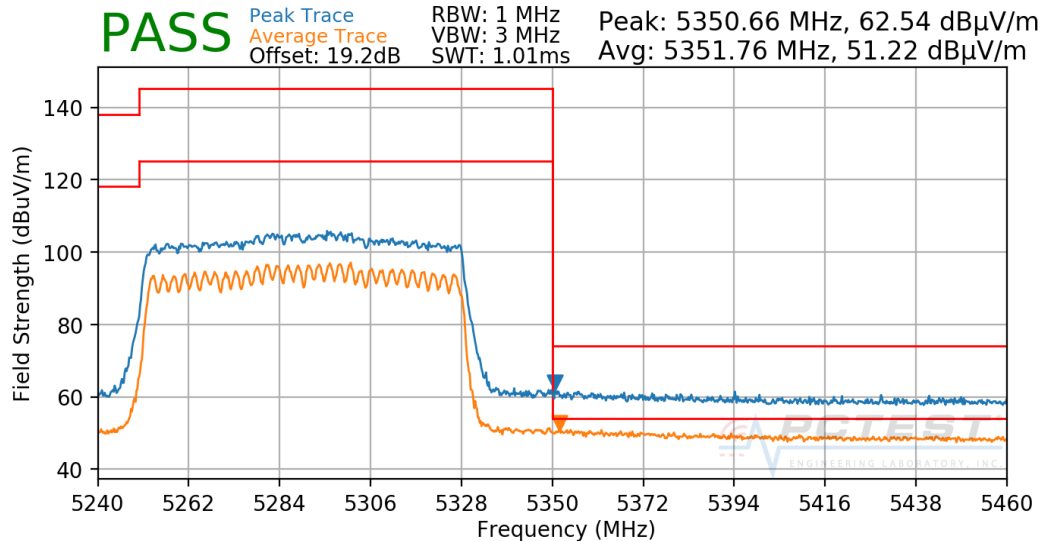

Plot 7-283. Radiated Upper Band Edge Plot CDD (UNII Band 2A)


|                                         |                                              |                            |                                 |
|-----------------------------------------|----------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2014                        | <b>MEASUREMENT REPORT</b><br>(CERTIFICATION) |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-10.BCG | Test Dates:<br>07/26/2018 - 10/10/2018       | EUT Type:<br>Tablet Device | Page 195 of 206                 |

Worst Case Mode: 802.11ac  
Worst Case Transfer Rate: MCS0  
Distance of Measurements: 3 Meters  
Operating Frequency: 5530MHz  
Channel: 106

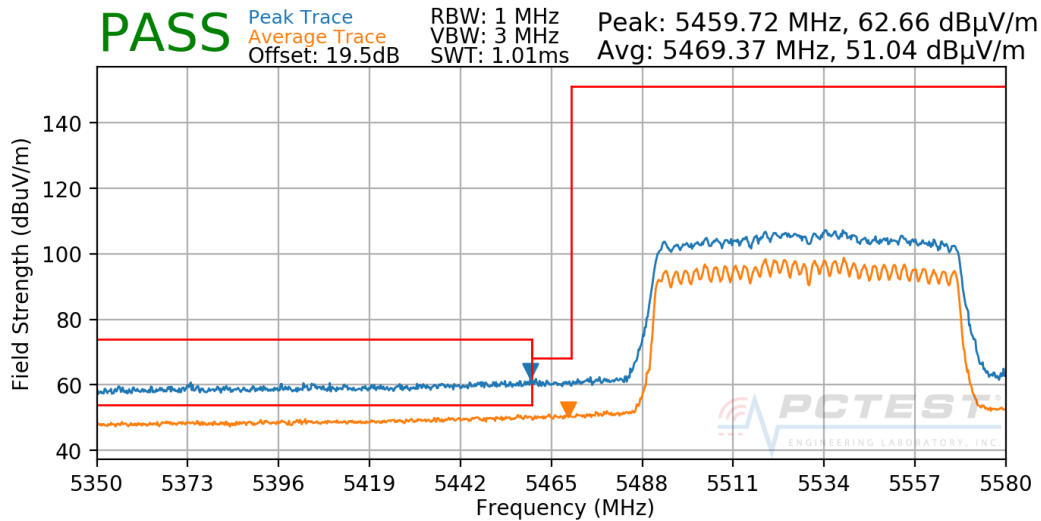

**Plot 7-284. Radiated Lower Band Edge Plot CDD (UNII Band 2C)**


Worst Case Mode: 802.11ac  
Worst Case Transfer Rate: MCS0  
Distance of Measurements: 3 Meters  
Operating Frequency: 5610MHz  
Channel: 122

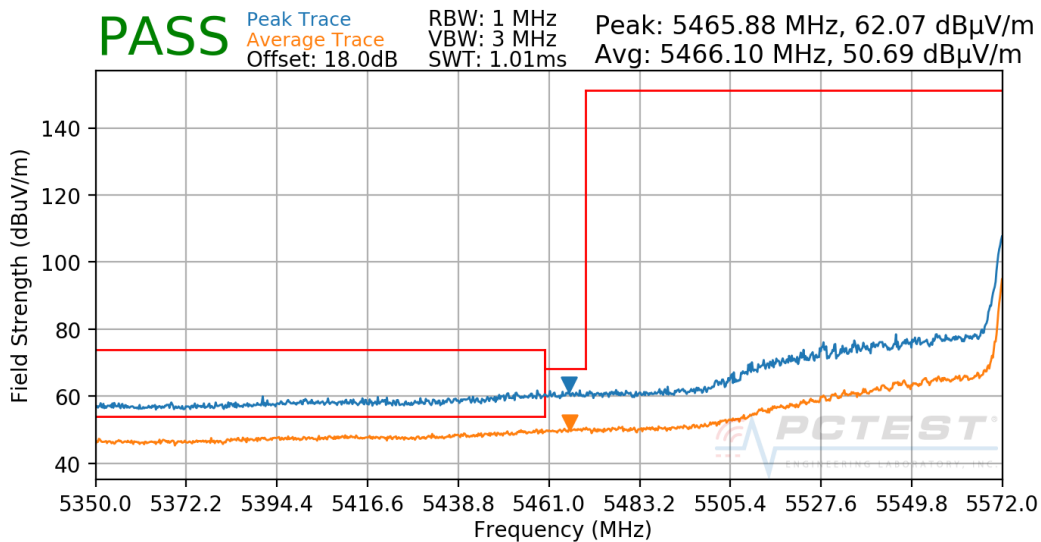

**Plot 7-285. Radiated Lower Band Edge Plot CDD (UNII Band 2C)**


|                                         |                                               |                            |                                 |
|-----------------------------------------|-----------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2014                        | <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-10.BCG | Test Dates:<br>07/26/2018 - 10/10/2018        | EUT Type:<br>Tablet Device | Page 196 of 206                 |

Worst Case Mode: 802.11ac  
Worst Case Transfer Rate: MCS0  
Distance of Measurements: 3 Meters  
Operating Frequency: 5775MHz  
Channel: 155

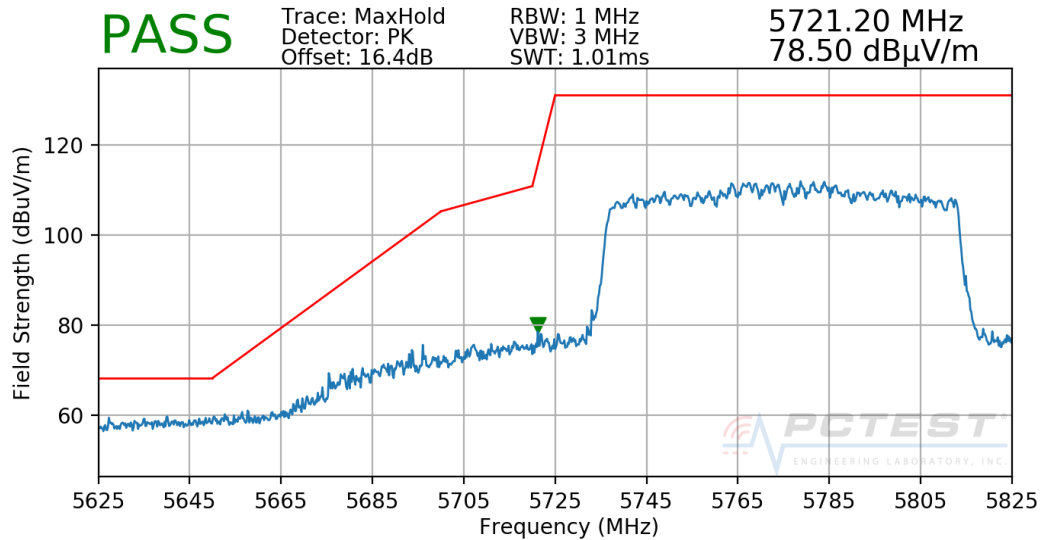

**Plot 7-286. Radiated Lower Band Edge Plot CDD (Peak - UNII Band 3)**

Worst Case Mode: 802.11ac  
Worst Case Transfer Rate: MCS0  
Distance of Measurements: 3 Meters  
Operating Frequency: 5775MHz  
Channel: 155

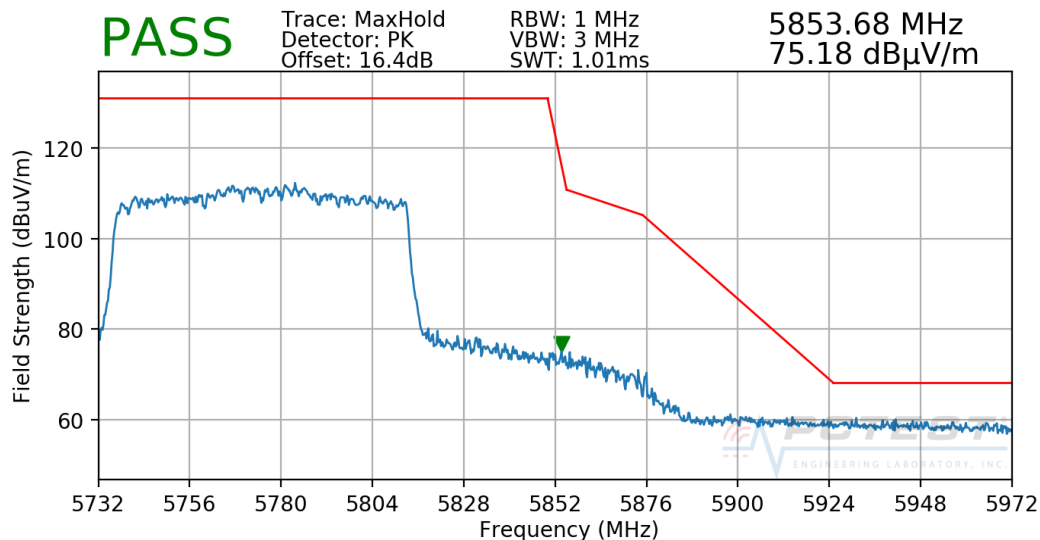

**Plot 7-287. Radiated Upper Band Edge Plot CDD (Peak - UNII Band 3)**

|                                         |                                               |                            |                                 |
|-----------------------------------------|-----------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2014                        | <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-10.BCG | Test Dates:<br>07/26/2018 - 10/10/2018        | EUT Type:<br>Tablet Device | Page 197 of 206                 |

## 7.7 Radiated Spurious Emissions Measurements – Below 1GHz

§15.209; RSS-Gen [8.9]

### Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

***All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 6 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-72 per Section 15.209 and RSS-Gen (8.9).***

| Frequency         | Field Strength<br>[μV/m] | Measured Distance<br>[Meters] |
|-------------------|--------------------------|-------------------------------|
| 0.009 – 0.490 MHz | 2400/F (kHz)             | 300                           |
| 0.490 – 1.705 MHz | 24000/F (kHz)            | 30                            |
| 1.705 – 30.00 MHz | 30                       | 30                            |
| 30.00 – 88.00 MHz | 100                      | 3                             |
| 88.00 – 216.0 MHz | 150                      | 3                             |
| 216.0 – 960.0 MHz | 200                      | 3                             |
| Above 960.0 MHz   | 500                      | 3                             |

**Table 7-72. Radiated Limits**

### Test Procedures Used

ANSI C63.10-2013

### Test Settings


#### Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize


|                                         |                                                                                                                                   |                            |                                 |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2014                        |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-10.BCG | Test Dates:<br>07/26/2018 - 10/10/2018                                                                                            | EUT Type:<br>Tablet Device | Page 198 of 206                 |

## Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

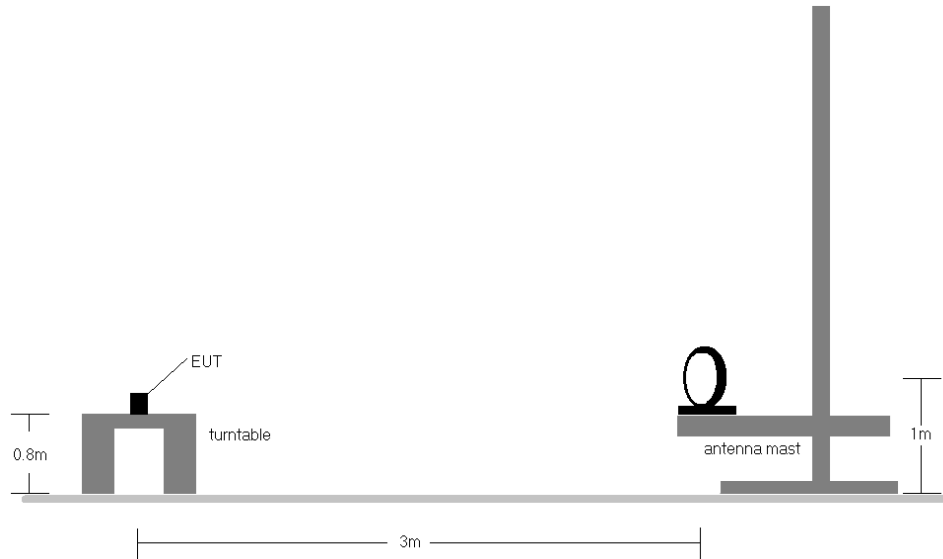

**Figure 7-6. Radiated Test Setup < 30MHz**

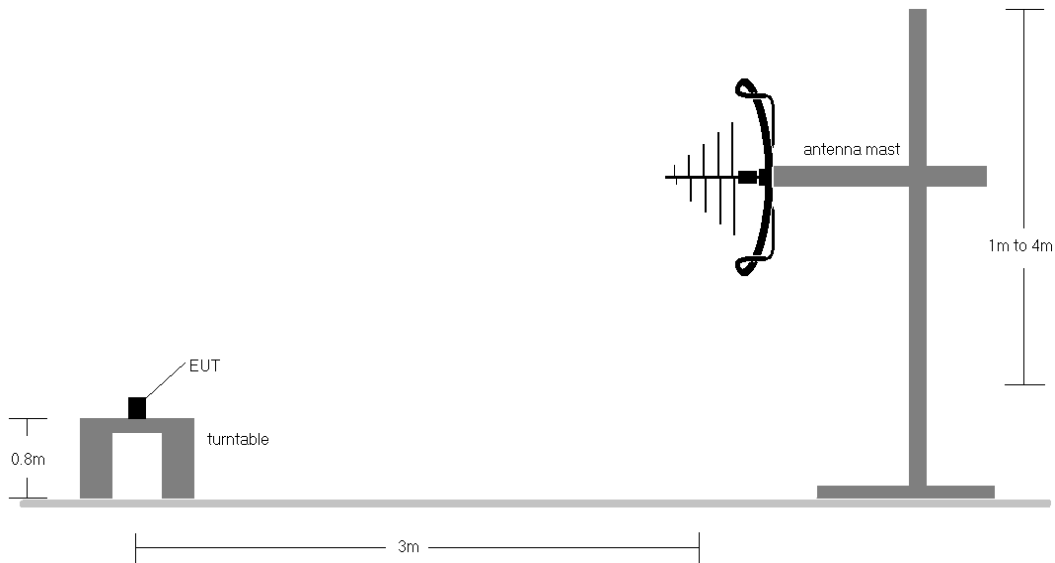

**Figure 7-7. Radiated Test Setup < 1GHz**

|                                         |                                                                                                                                   |                            |                                 |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2014                        |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-10.BCG | Test Dates:<br>07/26/2018 - 10/10/2018                                                                                            | EUT Type:<br>Tablet Device | Page 199 of 206                 |


## Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen (8.10) are below the limit shown in Table 7-72.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. There were no emissions detected in the 30MHz – 1GHz frequency range, as shown in the subsequent plots.

|                                         |                                                                                                                                   |                            |                                 |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2014                        |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-10.BCG | Test Dates:<br>07/26/2018 - 10/10/2018                                                                                            | EUT Type:<br>Tablet Device | Page 200 of 206                 |

## CDD Radiated Spurious Emissions Measurements (Below 1GHz)

§15.209; RSS-Gen [8.9]

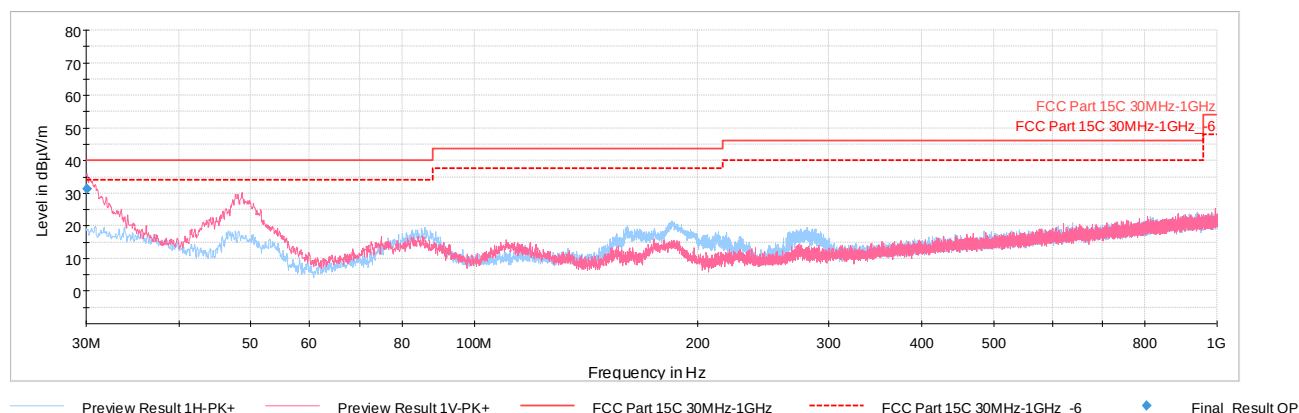

**Plot 7-288. Radiated Spurious Plot below 1GHz CDD (802.11n – U3 Ch. 157, w/ AC/DC Charger)**

| Frequency [MHz] | Detector   | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|------------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 30.10           | Quasi-Peak | V               | 100                 | 306                        | -68.12               | -8.93       | 29.95                   | 40.00          | -10.05      |
| 48.67           | Max Peak   | V               | 100                 | 15                         | -56.40               | -20.51      | 30.09                   | 40.00          | -9.91       |
| 85.78           | Max Peak   | H               | 250                 | 186                        | -69.02               | -18.38      | 19.60                   | 40.00          | -20.40      |
| 110.37          | Max Peak   | V               | 100                 | 322                        | -74.25               | -17.15      | 15.60                   | 43.52          | -27.92      |
| 184.04          | Max Peak   | H               | 100                 | 262                        | -66.34               | -19.34      | 21.32                   | 43.52          | -22.20      |
| 280.45          | Max Peak   | H               | 100                 | 295                        | -71.19               | -16.30      | 19.51                   | 46.02          | -26.51      |

**Table 7-73. Radiated Spurious Emissions below 1GHz CDD (802.11n – U3 Ch. 157, w/ AC/DC Charger)**

|                                         |                                              |                            |                                 |
|-----------------------------------------|----------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2014                        | <b>MEASUREMENT REPORT</b><br>(CERTIFICATION) |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-10.BCG | Test Dates:<br>07/26/2018 - 10/10/2018       | EUT Type:<br>Tablet Device | Page 201 of 206                 |

## 7.8 Line-Conducted Test Data

**§15.407; RSS-Gen [8.8]**

### Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

***All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).***

| Frequency of emission<br>(MHz) | Conducted Limit (dBμV) |           |
|--------------------------------|------------------------|-----------|
|                                | Quasi-peak             | Average   |
| 0.15 – 0.5                     | 66 to 56*              | 56 to 46* |
| 0.5 – 5                        | 56                     | 46        |
| 5 – 30                         | 60                     | 50        |

**Table 7-74. Conducted Limits**

\*Decreases with the logarithm of the frequency.

### Test Procedures Used

ANSI C63.10-2013, Section 6.2

### Test Settings

#### Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize


#### Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

|                                         |                                                                                                                                   |                            |                                 |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2014                        |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-10.BCG | Test Dates:<br>07/26/2018 - 10/10/2018                                                                                            | EUT Type:<br>Tablet Device | Page 202 of 206                 |

## Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

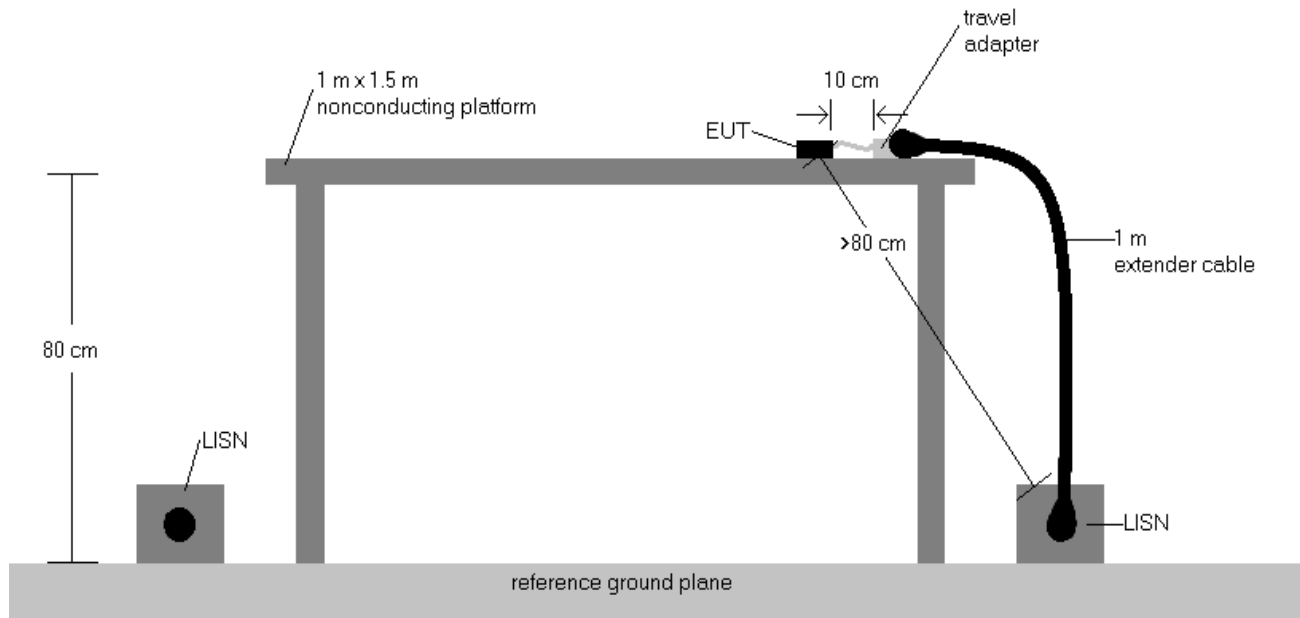


**Figure 7-8. Test Instrument & Measurement Setup**

## Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported using mid channel. The emissions found were not affected by the choice of channel used during testing.
2. The limit for an intentional radiator from 150kHz to 30MHz are specified in 15.207 and RSS-Gen (8.8).
3.  $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
4.  $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Corr. (dB)}$
5.  $\text{Margin (dB)} = \text{QP/AV Limit (dB}\mu\text{V)} - \text{QP/AV Level (dB}\mu\text{V)}$
6. Traces shown in plot are made using a peak detector.
7. Deviations to the Specifications: None.

|                                         |                                                                                                                                   |                            |                                 |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2014                        |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-10.BCG | Test Dates:<br>07/26/2018 - 10/10/2018                                                                                            | EUT Type:<br>Tablet Device | Page 203 of 206                 |

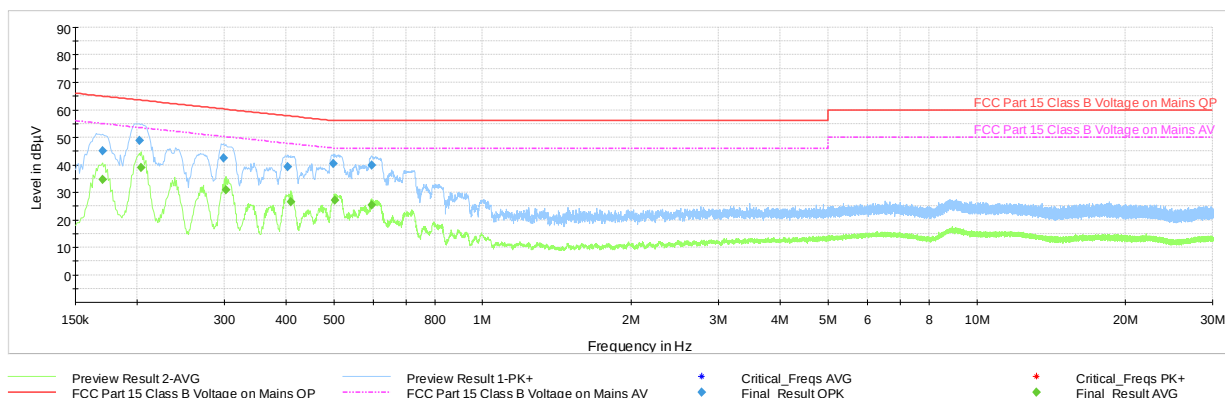


**Plot 7-289. Line Conducted Plot with 802.11n UNII Band 1 (L1) w/ AC/DC Charger**

| Frequency<br>MHz | Process State | QuasiPeak<br>dBμV | Average<br>dBμV | Limit<br>dBμV | Margin<br>dB | Bandwidth<br>kHz | Line | PE  |
|------------------|---------------|-------------------|-----------------|---------------|--------------|------------------|------|-----|
| 0.170000         | FINAL         | —                 | 34.55           | 54.96         | -20.41       | 9.000            | L1   | GND |
| 0.170000         | FINAL         | 45.04             | —               | 64.96         | -19.92       | 9.000            | L1   | GND |
| 0.202000         | FINAL         | 48.97             | —               | 63.53         | -14.56       | 9.000            | L1   | GND |
| 0.204000         | FINAL         | —                 | 38.99           | 53.45         | -14.46       | 9.000            | L1   | GND |
| 0.299000         | FINAL         | 42.47             | —               | 60.27         | -17.80       | 9.000            | L1   | GND |
| 0.302000         | FINAL         | —                 | 30.85           | 50.19         | -19.34       | 9.000            | L1   | GND |
| 0.403000         | FINAL         | 39.26             | —               | 57.79         | -18.53       | 9.000            | L1   | GND |
| 0.409000         | FINAL         | —                 | 26.48           | 47.67         | -21.19       | 9.000            | L1   | GND |
| 0.499000         | FINAL         | 40.35             | —               | 56.02         | -15.67       | 9.000            | L1   | GND |
| 0.503000         | FINAL         | —                 | 27.00           | 46.00         | -19.00       | 9.000            | L1   | GND |
| 0.597000         | FINAL         | —                 | 25.49           | 46.00         | -20.51       | 9.000            | L1   | GND |
| 0.597000         | FINAL         | 39.97             | —               | 56.00         | -16.03       | 9.000            | L1   | GND |

**Plot 7-290. Line Conducted Table with 802.11n UNII Band 1 (L1) w/ AC/DC Charger**

|                                         |                                               |                            |                                 |
|-----------------------------------------|-----------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2014                        | <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-10.BCG | Test Dates:<br>07/26/2018 - 10/10/2018        | EUT Type:<br>Tablet Device | Page 204 of 206                 |

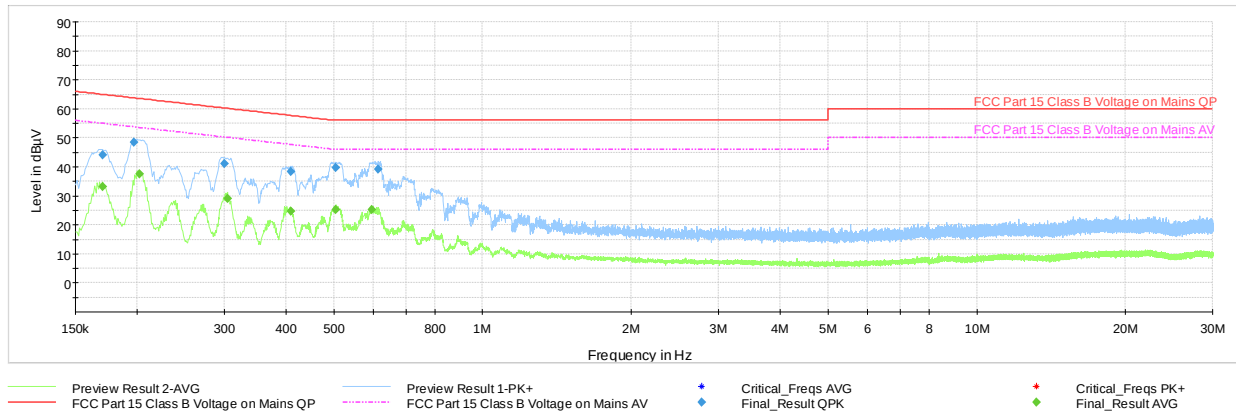

**Plot 7-291. Line Conducted Plot with 802.11n UNII Band 1 (N) w/ AC/DC Charger**

| Frequency<br>MHz | Process State | QuasiPeak<br>dBμV | Average<br>dBμV | Limit<br>dBμV | Margin<br>dB | Bandwidth<br>kHz | Line | PE  |
|------------------|---------------|-------------------|-----------------|---------------|--------------|------------------|------|-----|
| 0.170000         | FINAL         | —                 | 33.14           | 54.96         | -21.82       | 9.000            | N    | GND |
| 0.170000         | FINAL         | 43.97             | —               | 64.96         | -20.99       | 9.000            | N    | GND |
| 0.197000         | FINAL         | 48.36             | —               | 63.74         | -15.38       | 9.000            | N    | GND |
| 0.202000         | FINAL         | —                 | 37.64           | 53.53         | -15.89       | 9.000            | N    | GND |
| 0.300000         | FINAL         | 41.11             | —               | 60.24         | -19.13       | 9.000            | N    | GND |
| 0.305000         | FINAL         | —                 | 28.98           | 50.11         | -21.13       | 9.000            | N    | GND |
| 0.410000         | FINAL         | 38.24             | —               | 57.65         | -19.41       | 9.000            | N    | GND |
| 0.410000         | FINAL         | —                 | 24.79           | 47.65         | -22.86       | 9.000            | N    | GND |
| 0.504000         | FINAL         | —                 | 25.35           | 46.00         | -20.65       | 9.000            | N    | GND |
| 0.505000         | FINAL         | 39.76             | —               | 56.00         | -16.24       | 9.000            | N    | GND |
| 0.596000         | FINAL         | —                 | 25.12           | 46.00         | -20.88       | 9.000            | N    | GND |
| 0.614000         | FINAL         | 39.25             | —               | 56.00         | -16.75       | 9.000            | N    | GND |

**Plot 7-292. Line Conducted Table with 802.11n UNII Band 1 (N) w/ AC/DC Charger**

|                                         |                                               |                            |                                 |
|-----------------------------------------|-----------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2014                        | <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-10.BCG | Test Dates:<br>07/26/2018 - 10/10/2018        | EUT Type:<br>Tablet Device | Page 205 of 206                 |

## 8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Apple Tablet Device FCC ID: BCGA2014** is in compliance with Part 15 Subpart E (15.407) of the FCC Rules and RSS-247 of the Innovation, Science and Economic Development Canada Rules.

|                                         |                                                                                                                                   |                            |                                 |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------------------|
| FCC ID: BCGA2014                        |  <b>MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |                            | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1C1806050011-10.BCG | Test Dates:<br>07/26/2018 - 10/10/2018                                                                                            | EUT Type:<br>Tablet Device | Page 206 of 206                 |