

FCC and ISED Test Report
 Apple Inc, Model: A2442
 In accordance with FCC 47 CFR Part 15E,
 ISED RSS-247 and ISED RSS-GEN
 (5 GHz WLAN)

Prepared for: Apple Inc, One Apple Park Way, Cupertino
 California, 95014, USA

FCC ID: BCGA2442 IC: 579C-A2442

COMMERCIAL-IN-CONFIDENCE

Document 75952057-12 Issue 01

Phil Harrison
 Digitally signed
 by Phil Harrison
 Date: 2021.10.07
 14:43:35 +01'00'



Add value.
 Inspire trust.

SIGNATURE

NAME	JOB TITLE	RESPONSIBLE FOR	ISSUE DATE
Phil Harrison	Senior Engineer	Authorised Signatory	23 September 2021

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD document control rules.

ENGINEERING STATEMENT

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC 47 CFR Part 15E, ISED RSS-247 and ISED RSS-GEN. The sample tested was found to comply with the requirements defined in the applied rules.

RESPONSIBLE FOR	NAME	DATE	SIGNATURE
Testing	George Porter	23 September 2021	
Testing	Mohammed Malik	23 September 2021	
Testing	Daniel Cameron	23 September 2021	
Testing	Taha Shafique	23 September 2021	
Testing	Jaiyanth Balendrarajah	23 September 2021	
Testing	Faisal Malyar	23 September 2021	
Testing	Ahmad Javid	23 September 2021	
Testing	Ian Hart	23 September 2021	
Testing	Jason Hicks	23 September 2021	
Testing	Colin Brain	23 September 2021	
Testing	Liang Tian	23 September 2021	

FCC Accreditation
 90987 Octagon House, Fareham Test Laboratory

ISED Accreditation
 12669A Octagon House, Fareham Test Laboratory

EXECUTIVE SUMMARY

A sample of this product was tested and found to be compliant with FCC 47 CFR Part 15E: 2020, ISED RSS-247: Issue 2 (2017-02) and ISED RSS-GEN: Issue 5 (2018-04) + A2 (2021-02) for the tests detailed in section 1.3.



DISCLAIMER AND COPYRIGHT

This non-binding report has been prepared by TÜV SÜD with all reasonable skill and care. The document is confidential to the potential Client and TÜV SÜD. No part of this document may be reproduced without the prior written approval of TÜV SÜD. © 2021 TÜV SÜD. This report relates only to the actual item/items tested.

ACCREDITATION

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation. Results of tests not covered by our UKAS Accreditation Schedule are marked NUA (Not UKAS Accredited).

TÜV SÜD
 is a trading name of TÜV SÜD Ltd
 Registered in Scotland at East Kilbride,
 Glasgow G75 0QF, United Kingdom
 Registered number: SC215164

TÜV SÜD Ltd is a
 TÜV SÜD Group Company

Phone: +44 (0) 1489 558100
 Fax: +44 (0) 1489 558101
www.tuvsud.com/en

TÜV SÜD
 Octagon House
 Concorde Way
 Fareham
 Hampshire PO15 5RL
 United Kingdom



Contents

1	Report Summary	2
1.1	Report Modification Record.....	2
1.2	Introduction.....	2
1.3	Brief Summary of Results	3
1.4	Product Information	4
1.5	Deviations from the Standard.....	5
1.6	EUT Modification Record	6
1.7	Test Location	7
2	Test Details	8
2.1	Restricted Band Edges.....	8
2.2	Maximum Conducted Output Power	57
2.3	Maximum Conducted Power Spectral Density	170
2.4	Emission Bandwidth	280
2.5	Authorised Band Edges	853
2.6	Spurious Radiated Emissions	918
2.7	Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period	940
3	Measurement Uncertainty	952



1 Report Summary

1.1 Report Modification Record

Alterations and additions to this report will be issued to the holders of each copy in the form of a complete document.

Issue	Description of Change	Date of Issue
1	First Issue	23 September 2021

Table 1

1.2 Introduction

Applicant	Apple Inc
Manufacturer	Apple Inc
Model Number(s)	A2442
Serial Number(s)	DNQHW6Y3WY, MVX7LW3GV6, V3WLVWCFN6, XH2DGXFKY6 and MJ2Y719JTQ
Hardware Version(s)	REV1.0
Software Version(s)	DNQHW6Y3WY: 21A102280p MVX7LW3GV6, V3WLVWCFN6 XH2DGXFKY6: 21A102281b MJ2Y719JTQ : 21A333
Number of Samples Tested	5
Test Specification/Issue/Date	FCC 47 CFR Part 15E: 2020 ISED RSS-247: Issue 2 (2017-02) ISED RSS-GEN: Issue 5 (2018-04) + A2 (2021-02)
Order Number	0540218229
Date	22-April-2021
Date of Receipt of EUT	31-March-2021, 16-July-2021 and 7-September-2021
Start of Test	22-June-2021
Finish of Test	20-September-2021
Name of Engineer(s)	George Porter, Mohammad Malik, Daniel Cameron, Taha Shafique, Jaiyanth Balendrarajah, Faisal Malyar, Ahmad Javid, Ian Hart, Colin Brain, Liang Tian and Jason Hicks
Related Document(s)	ANSI C63.10 (2013) KDB 662911 D01 v02r01 KDB 905462 D02 v02



1.3 Brief Summary of Results

A brief summary of the tests carried out in accordance with FCC 47 CFR Part 15E, ISSED RSS-247 and ISSED RSS-GEN is shown below.

Section	Specification Clause			Test Description	Result	Comments/Base Standard
	Part 15E	RSS-247	RSS-GEN			
Configuration and Mode: 5 GHz WLAN						
-	15.203	-	-	Antenna Requirement	N/T	The device complies with the provisions of this section, as it uses permanently attached integral antennas.
2.1	15.205	-	8.10	Restricted Band Edges	Pass	
2.2	15.407 (a)	6.2	-	Maximum Conducted Output Power	Pass	
2.3	15.407 (a)	6.2	-	Maximum Conducted Power Spectral Density	Pass	
2.4	15.407 (a)	6.2	-	Emission Bandwidth	Pass	
2.5	15.407 (b)	6.2	-	Authorised Band Edges	Pass	
2.6	15.407 (b) and 15.209	6.2 and 6.13	8.9	Spurious Radiated Emissions	Pass	
2.7	15.407 (h)(2)(iii)(iv)	6.3.2(c)(d)(e)	-	Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period	Pass	
Configuration and Mode: 5 GHz WLAN - Client to Client						
2.7	15.407 (h)(2)(iii)(iv)	6.3.2(c)(d)(e)	-	Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period	Pass	

Table 2



1.4 Product Information

1.4.1 Technical Description

The Equipment under test (EUT) was a laptop computer with Bluetooth, Bluetooth Low Energy and 802.11 a/b/g/n/ac/ax capabilities in the 2.4 GHz and 5 GHz bands.

1.4.2 Test Modes

The EUT's 5 GHz 802.11 radio supported Single Input/Single Output (SISO) and 2x2 MIMO (Multiple Input/Multiple Output) modes. 802.11a supports 20 MHz bandwidth only. 802.11n supported 20 MHz and 40 MHz bandwidths and 802.11ac, and ax supported 20 MHz, 40 MHz and 80 MHz bandwidths.

802.11a mode supported SISO operation only. 802.11n and ac supported SISO, Cyclic Delay Diversity (CDD), Space Division Multiplexing (SDM) and Transmit Beamforming (TxBF) MIMO modes. 802.11ax supported SISO, CDD and SDM modes.

The EUT supported 802.11ax Single User (SU) and Multi-User (MU-MIMO) in all bands, for Resource Unit (RU) sizes from 52 subcarriers up to the maximum allowed for each channel bandwidth. SISO & MU-MIMO with 26 subcarrier (RU26) was additionally supported in U-NII-1 and U-NII-3 bands only.

The EUT uses different output powers per core dependent on how many cores are used. The EUT also uses different power tables for Cyclic Delay Diversity (CDD), Space Division Multiplexing (SDM), and transmit beamforming (TxBF) modes. It uses the same conducted power across all cores in any given mode, but due to the different antenna gains the radiated powers per core differ.

US and CA country codes changed the power table used for U-NII band 1. Therefore U-NII-1 channels were tested using both power settings for each country's respective limits.

After preliminary investigations were performed to find worst-case operation, the EUT was tested in the following modes unless otherwise specified:

SISO Modes (5 GHz Core 0 for U-NII-1 / 2A / 2C and 5 GHz Core 1 for U-NII-3):

- 802.11a – 12 Mbps
- 802.11n HT20 – MCS0 (Radiated), MCS2 (Conducted)
- 802.11n HT40 – MCS2
- 802.11ac VHT80 - MCS2x1
- 802.11ax HE20 SU – MCS2x1
- 802.11ax HE20 RU26, RU52, RU106 – MCS0x1 (Radiated), MCS2x1 (Conducted)
- 802.11ax HE40 SU – MCS2x1
- 802.11ax HE80 SU – MCS2x1

2x2 MIMO Modes (Core 0+1 for U-NII-1 / 2A / 2C / 3):

- 802.11n HT20 - CDD (MCS2), SDM (MCS10) and TxBF (MCS2)
- 802.11n HT40 - CDD (MCS2), SDM (MCS10) and TxBF (MCS2)
- 802.11ac VHT80 – CDD (MCS2x1), SDM (MCS2x2) and TxBF (MCS2x1)
- 802.11ax HE20 SU – CDD (MCS2x1) and SDM (MCS2x2)
- 802.11ax HE40 SU – CDD (MCS2x1) and SDM (MCS2x2)
- 802.11ax HE80 SU – CDD (MCS2x1) and SDM (MCS2x2)
- 802.11ax HE20 RU26, RU52, RU106 – CDD (MCS2x1) and SDM (MCS2x2)

Band Edge testing was performed for all modulation types and the worst cases reported.



1.4.3 Test Setup

For conducted tests the EUT antennas were disconnected and replaced with U.FL to SMA test cables to enable conducted testing on each core. The losses of these test cables were known and compensated for in any conducted measurements.

For transmit beamforming (TxBF) modes the EUT was set up communicating with a support notebook computer provided by the applicant, configured with custom commands to act as an access point. The test laptop was also set to a low output power (approximately 0 dBm) so in conjunction with the rest of the set-up configuration, would give negligible power at the measuring equipment and would not affect the test result. The support laptop's test network set the channel and bandwidth to which the EUT could connect. The EUT then set up a communications link to the support laptop, operating in normal communications mode but with beamforming modes forced on and TPC disabled via terminal commands so the EUT could be limited to worst-case modes. The EUT transmit duty cycle was then maximized by using iPerf bandwidth testing software to keep the transmit output buffer full and generate more traffic from the EUT to the support laptop than the link could sustain. The EUT therefore could fully operate its beamforming mode but with strictly controlled test parameters.

For all other testing except DFS the EUT was put into a continuous transmit test mode with the chipset manufacturer's test commands via a script running in the EUTs terminal application. The EUT then transmitted the required type of packeted 802.11 data frames of fixed length, containing the standard headers and with pseudo-random data content, ensuring the measured signals were representative and contained all the symbols at the highest power control level.

The test setup used for DFS is described in the test result section of the present document.

1.4.4 Antenna Gain Table (5 GHz WLAN)

Antenna Port	Frequency Range (MHz)	Peak Gain (dBi)	Conducted Cable Loss (dB)
Core 0	5150 to 5250	6.50	1.50
	5250 to 5350	7.90	1.60
	5470 to 5725	6.40	1.60
	5725 to 5850	5.90	1.60
Core 1	5150 to 5250	5.80	1.50
	5250 to 5350	4.90	1.60
	5470 to 5725	4.90	1.60
	5725 to 5850	6.40	1.60

Table 3

1.5 Deviations from the Standard

No deviations from the applicable test standard were made during testing.



1.6 EUT Modification Record

The table below details modifications made to the EUT during the test programme.

The modifications incorporated during each test are recorded on the appropriate test pages.

Modification State	Description of Modification still fitted to EUT	Modification Fitted By	Date Modification Fitted
Model: A2442, Serial Number: DNQHW6Y3WY			
0	As supplied by the customer	Not Applicable	Not Applicable
Model: A2442, Serial Number: XH2DGXFKY6			
0	As supplied by the customer	Not Applicable	Not Applicable
Model: A2442, Serial Number: V3WLVWCFN6			
0	As supplied by the customer	Not Applicable	Not Applicable
Model: A2442, Serial Number: MVX7LW3GV6			
0	As supplied by the customer	Not Applicable	Not Applicable
Model: A2442, Serial Number: MJ2Y719JTQ			
0	As supplied by the customer	Not Applicable	Not Applicable

Table 4



1.7 Test Location

TÜV SÜD conducted the following tests at our Fareham Test Laboratory.

Test Name	Name of Engineer(s)	Accreditation
Configuration and Mode: 5 GHz WLAN		
Restricted Band Edges	Taha Shafique, Jaiyanth Balendrarajah, Faisal Malyar, Ahmad Javid, Ian Hart and Mohammad Malik	UKAS
Maximum Conducted Output Power	George Porter and Jason Hicks	UKAS
Maximum Conducted Power Spectral Density	George Porter and Jason Hicks	UKAS
Emission Bandwidth	George Porter and Jason Hicks	UKAS
Authorised Band Edges	Taha Shafique, Jaiyanth Balendrarajah, Faisal Malyar, Ahmad Javid, Ian Hart and Mohammad Malik	UKAS
Spurious Radiated Emissions	Mohammad Malik, Colin Brain and Liang Tian	UKAS
Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period	Daniel Cameron	UKAS
Configuration and Mode: 5 GHz WLAN - Client to Client		
Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period	Daniel Cameron	UKAS

Table 5

Office Address:

TÜV SÜD
Octagon House
Concorde Way
Fareham
Hampshire
PO15 5RL
United Kingdom



2 Test Details

2.1 Restricted Band Edges

2.1.1 Specification Reference

FCC 47 CFR Part 15E, Clause 15.205
ISED RSS-GEN, Clause 8.10

2.1.2 Equipment Under Test and Modification State

A2442, S/N: DNQHW6Y3WY - Modification State 0

2.1.3 Date of Test

22-June-2021 to 15-July-2021

2.1.4 Test Method

The test was performed in accordance with ANSI C63.10, clause 6.10.5.

Restricted Band Edge measurements were performed with the device operating in SISO and MIMO modes, across the various modulations supported by the device.

The measurements displayed within this report have been limited to those modes which have been shown to be worst case.

Where duty cycle corrections were required for average results, these are included in the result tables but are not shown on the plots.

Further measurements are held on file by TÜV SÜD and are available if required..

2.1.5 Environmental Conditions

Ambient Temperature	19.5 - 23.6 °C
Relative Humidity	40.9 - 65.3 %



2.1.6 Test Results

5 GHz WLAN

Mode	Data Rate/ MCS	Resource Size	Resource Index	TX Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dBμV/m)	Average Level (dBμV/m)
802.11a, Core 0	54Mbps	-	-	5180	5150	66.71	50.84
802.11n HT20, Core 0	MCS7	-	-	5180	5150	68.25	49.18
802.11ax HE20, Core 0	MCS11x1	SU	-	5180	5150	68.58	49.85
802.11ax HE20, Core 0	MCS11x1	26	0	5180	5150	68.57	47.00
802.11a, Core 0	54Mbps	-	-	5320	5350	65.39	50.48
802.11n HT20, Core 0	MCS7	-	-	5320	5350	67.53	50.65
802.11ax HE20, Core 0	MCS11x1	SU	-	5320	5350	68.78	51.00
802.11ax HE20, Core 0	MCS11x1	52	40	5320	5350	68.84	50.69
802.11a, Core 0	54Mbps	-	-	5500	5460	62.62	48.81
802.11n HT20, Core 0	MCS7	-	-	5500	5460	67.56	49.45
802.11ax HE20, Core 0	MCS11x1	SU	-	5500	5460	67.51	50.01
802.11ax HE20, Core 0	MCS11x1	52	37	5500	5460	65.47	48.93

Table 6 - 20 MHz Bandwidth SISO Restricted Band Edge Results



Figure 1 - 802.11a, Core 0 - 5180 MHz, Band Edge Frequency 5150 MHz

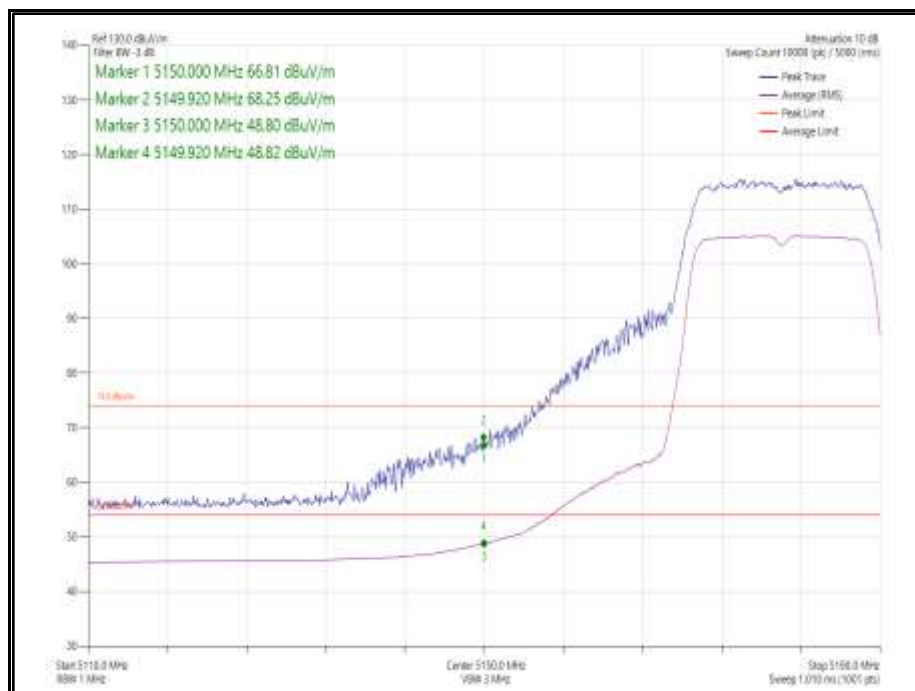


Figure 2 - 802.11n HT20, Core 0 - 5180 MHz, Band Edge Frequency 5150 MHz

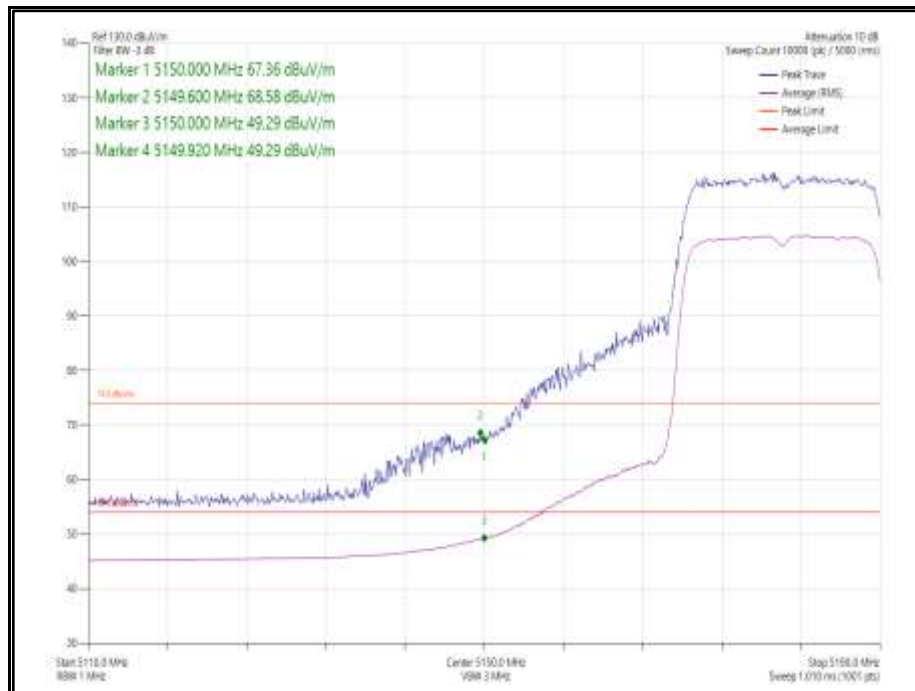


Figure 3 - 802.11ax HE20, Core 0, SU - 5180 MHz, Band Edge Frequency 5150 MHz



Figure 4 - 802.11ax HE20, Core 0, 26-0 - 5180 MHz, Band Edge Frequency 5150 MHz

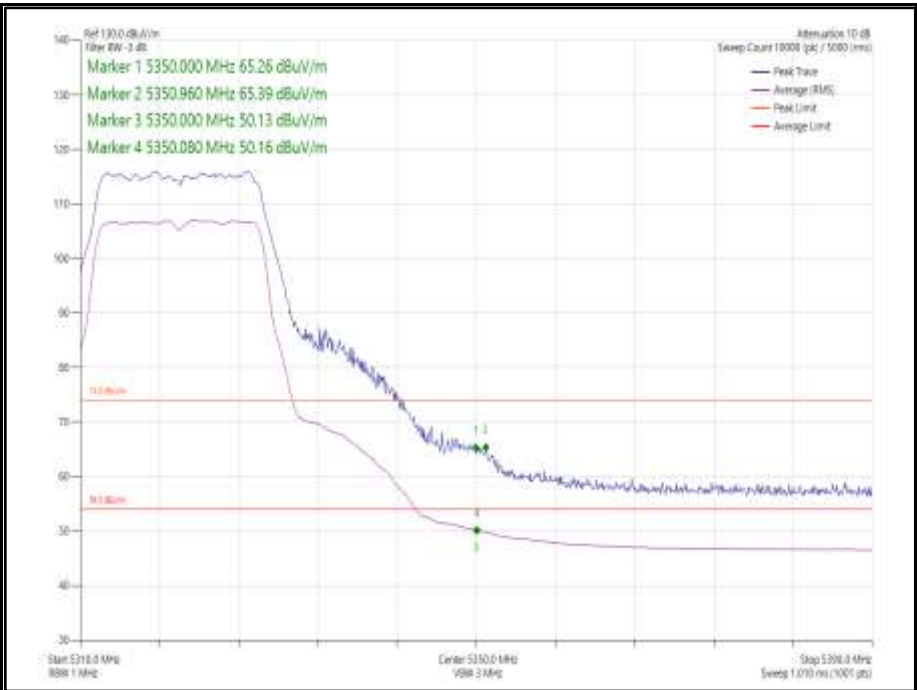


Figure 5 - 802.11a, Core 0 - 5320 MHz, Band Edge Frequency 5350 MHz

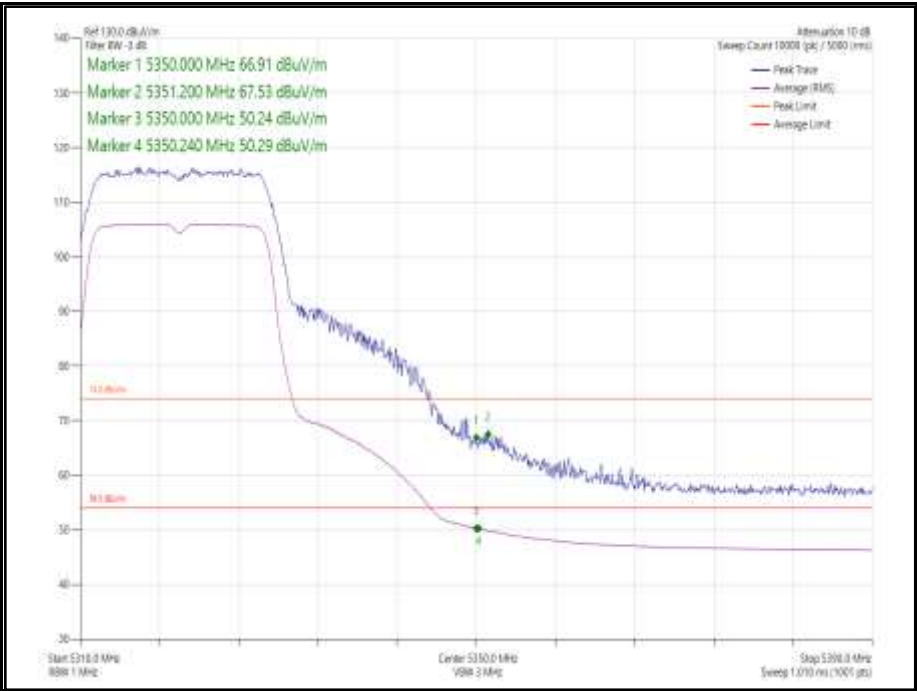


Figure 6 - 802.11n HT20, Core 0 - 5320 MHz, Band Edge Frequency 5350 MHz

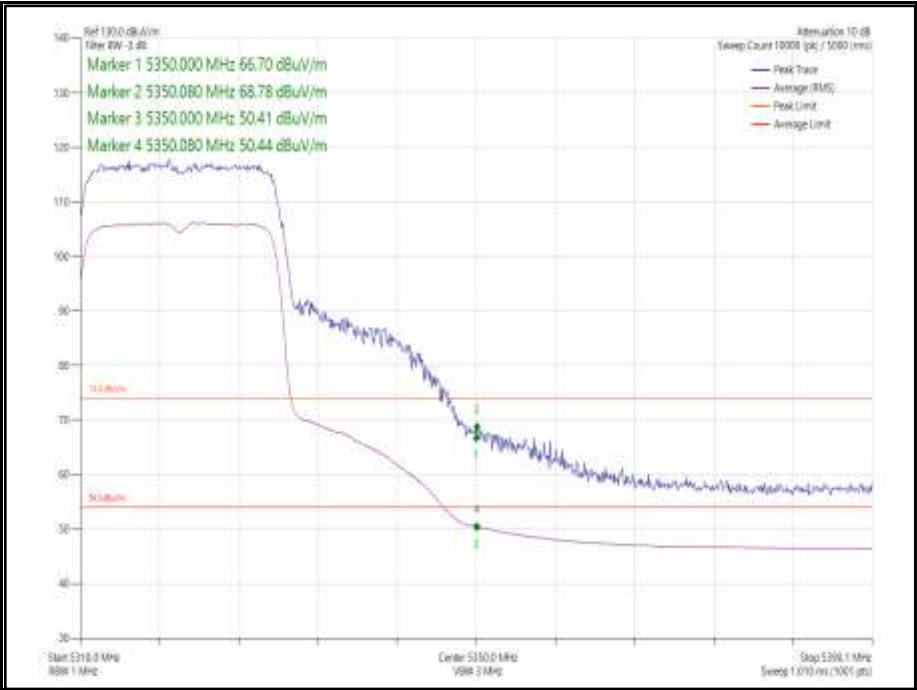


Figure 7 - 802.11ax HE20, Core 0, SU - 5320 MHz, Band Edge Frequency 5350 MHz

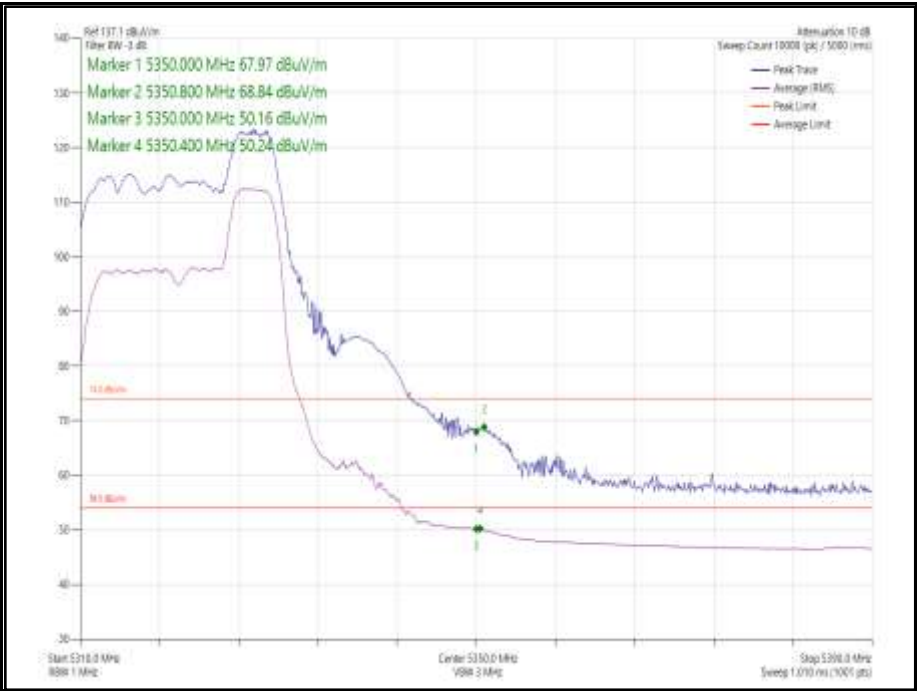


Figure 8 - 802.11ax HE20, Core 0, 52-40 - 5320 MHz, Band Edge Frequency 5350 MHz

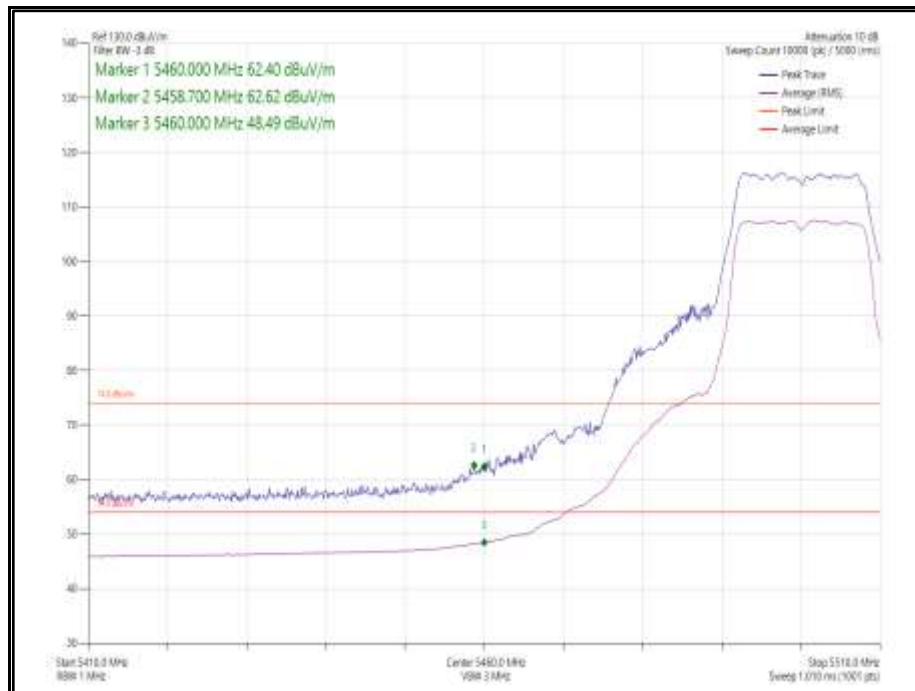


Figure 9 - 802.11a, Core 0 - 5500 MHz, Band Edge Frequency 5460 MHz

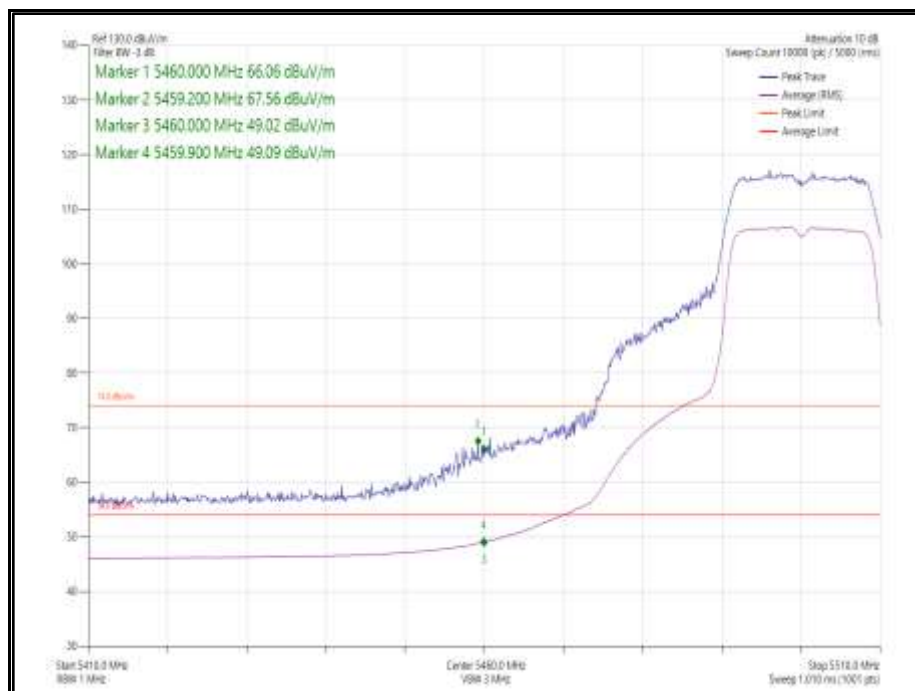


Figure 10 - 802.11n HT20, Core 0 - 5500 MHz, Band Edge Frequency 5460 MHz

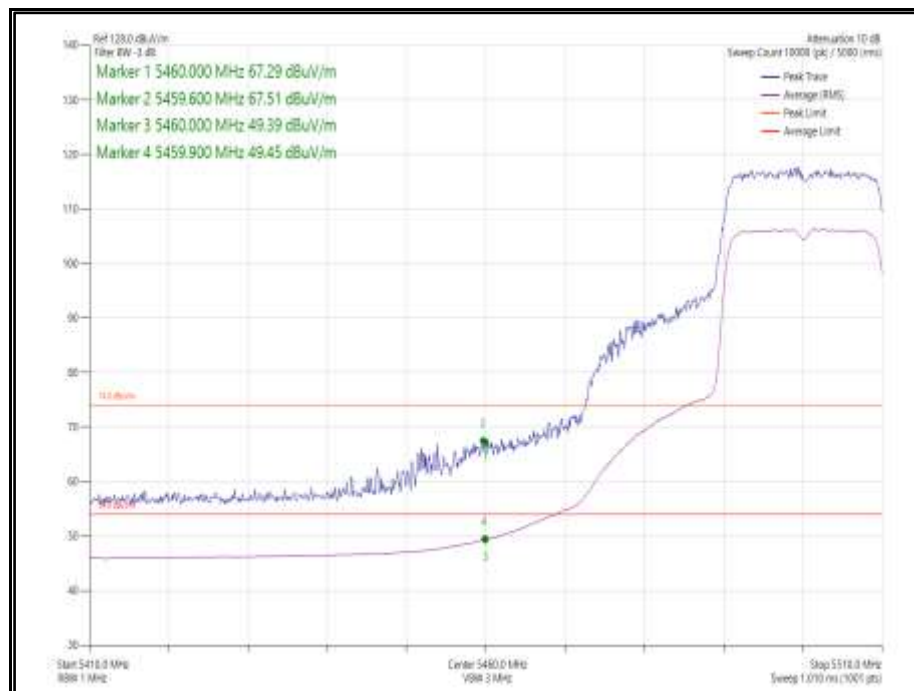


Figure 11 - 802.11ax HE20, Core 0, SU - 5500 MHz, Band Edge Frequency 5460 MHz

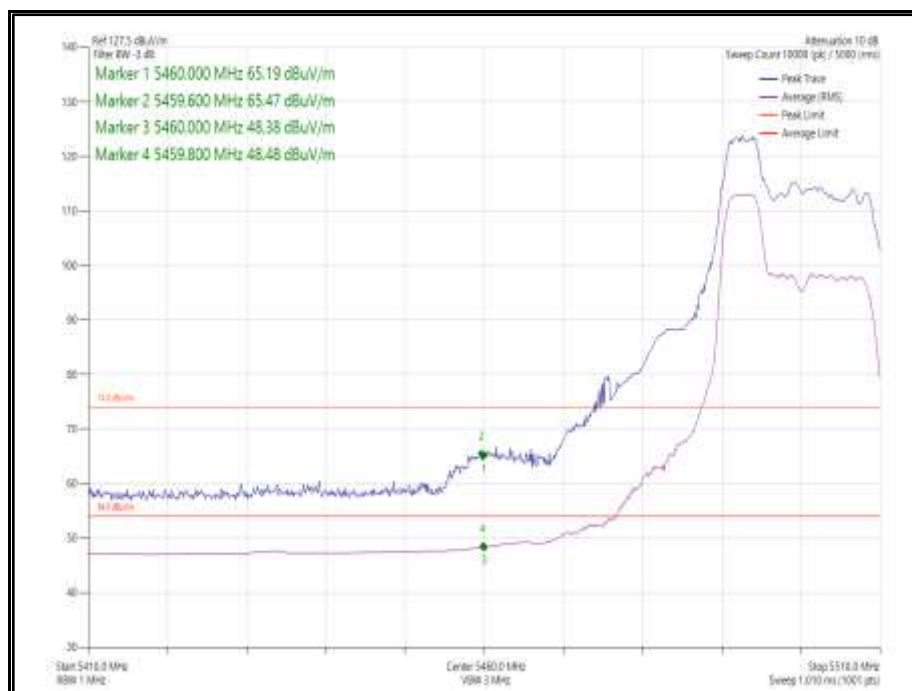


Figure 12 - 802.11ax HE20, Core 0, 52-37 - 5500 MHz, Band Edge Frequency 5460 MHz



Mode	Modulation Coding Scheme	Resource size	Resource Index	Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dBμV/m)	Average Level (dBμV/m)
802.11n HT20 CDD, Cores 0-1	MCS7	-	-	5180	5150	68.34	49.44
802.11n HT20 SDM, Cores 0-1	MCS15	-	-	5180	5150	67.45	50.36
802.11ax HE20 CDD Cores 0-1	MCS11x1	SU	-	5180	5150	68.29	49.57
802.11ax HE20 CDD, Cores 0-1	MCS11x1	26	0	5180	5150	68.19	48.39
802.11ax HE20 SDM, Cores 0-1	MCS11x2	SU	-	5180	5150	68.39	50.60
802.11ax HE20 SDM, Cores 0-1	MCS11x2	26	0	5180	5150	68.38	48.52
802.11n HT20 CDD, Cores 0-1	MCS7	-	-	5320	5350	66.91	50.57
802.11n HT20 SDM, Cores 0-1	MCS15	-	-	5320	5350	67.39	50.12
802.11ax HE20 CDD, Cores 0-1	MCS11x1	SU	-	5320	5350	67.76	50.62
802.11ax HE20 CDD, Cores 0-1	MCS11x1	52	40	5320	5350	67.89	50.91
802.11ax HE20 SDM, Cores 0-1	MCS11x2	SU	-	5320	5350	68.32	49.97
802.11ax HE20 SDM, Cores 0-1	MCS11x2	52	40	5320	5350	66.90	50.19
802.11n HT20 CDD, Cores 0-1	MCS7	-	-	5500	5460	68.66	50.86
802.11n HT20 SDM, Cores 0-1	MCS15	-	-	5500	5460	66.46	50.91
802.11ax HE20 CDD, Cores 0-1	MCS11x1	SU	-	5500	5460	68.21	50.38
802.11ax HE20 CDD, Cores 0-1	MCS11x1	52	37	5500	5460	68.05	50.44
802.11ax HE20 SDM, Cores 0-1	MCS4x2	SU	-	5500	5460	67.63	50.97
802.11ax HE20 SDM, Cores 0-1	MCS11x2	52	37	5500	5460	67.51	50.67

Table 7 - 20 MHz Bandwidth 2TX MIMO Restricted Band Edge Results

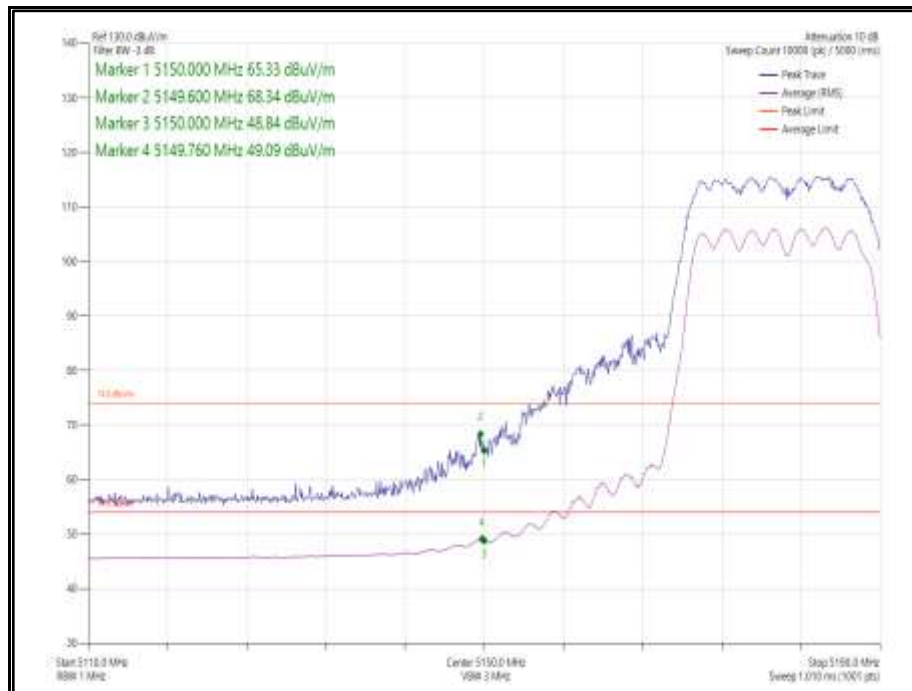


**Figure 13 - 802.11n HT20 CDD, Cores 0-1 - 5180 MHz
Band Edge Frequency 5150 MHz**



**Figure 14 - 802.11n HT20 SDM, Cores 0-1 - 5180 MHz
Band Edge Frequency 5150 MHz**

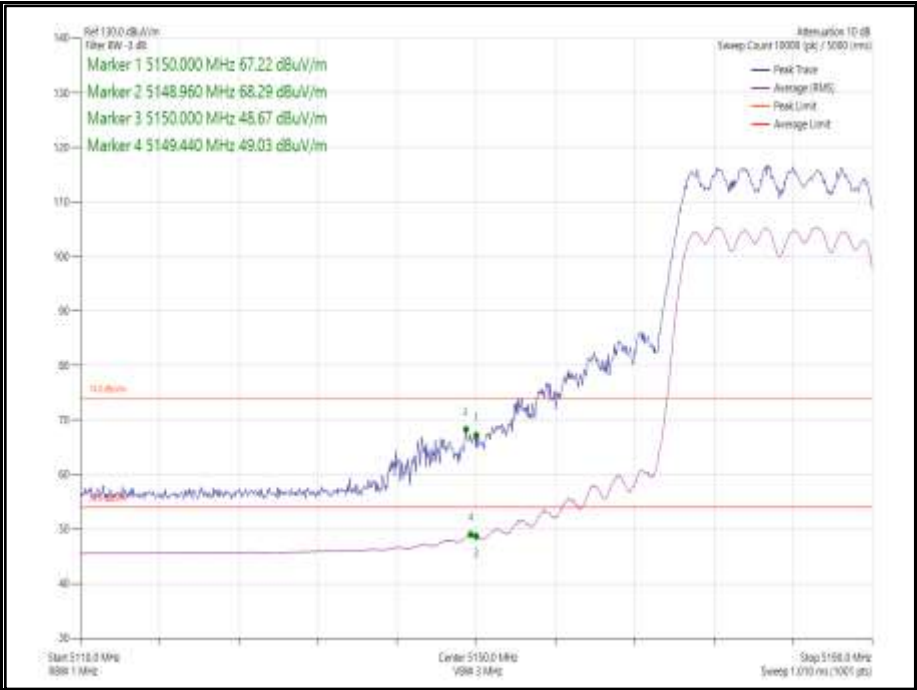


Figure 15 - 802.11ax HE20 CDD, Cores 0-1 SU - 5180 MHz
Band Edge Frequency 5150 MHz

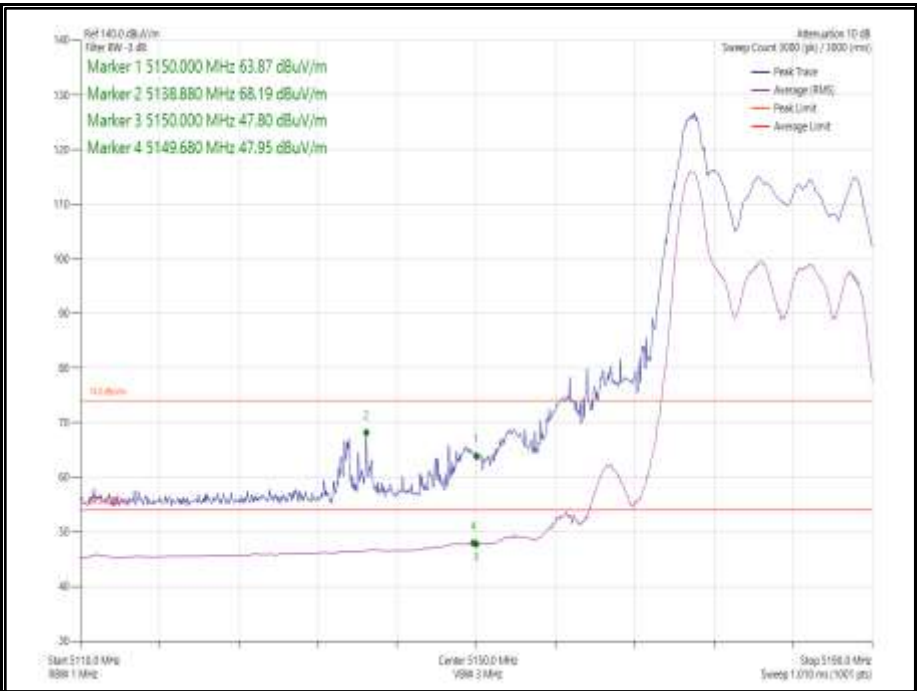


Figure 16 - 802.11ax HE20 CDD, Cores 0-1, 26-0 - 5180 MHz
Band Edge Frequency 5150 MHz

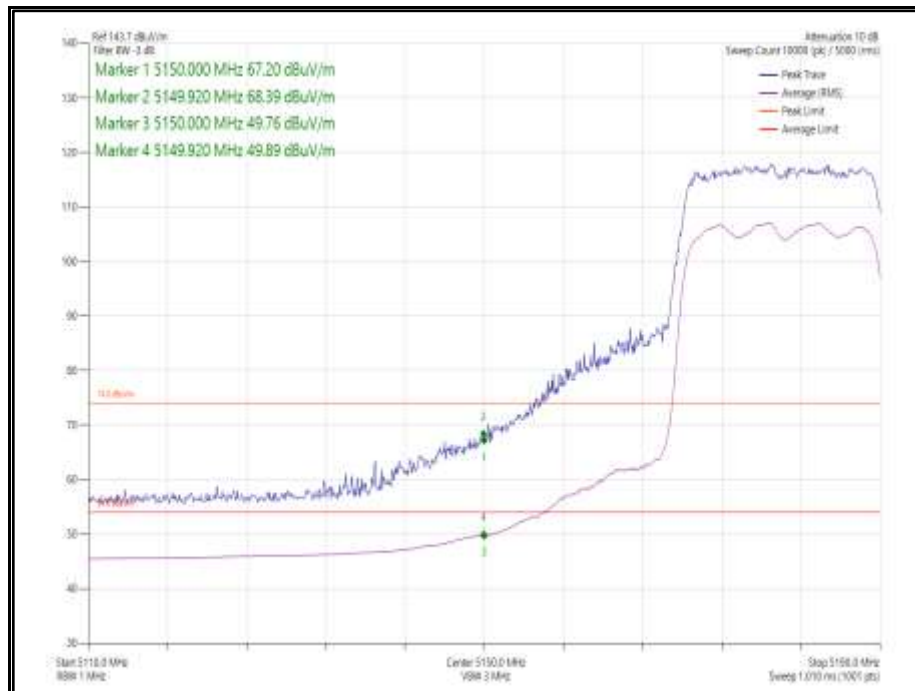


**Figure 17 - 802.11ax HE20 SDM, Cores 0-1, SU - 5180 MHz
Band Edge Frequency 5150 MHz**

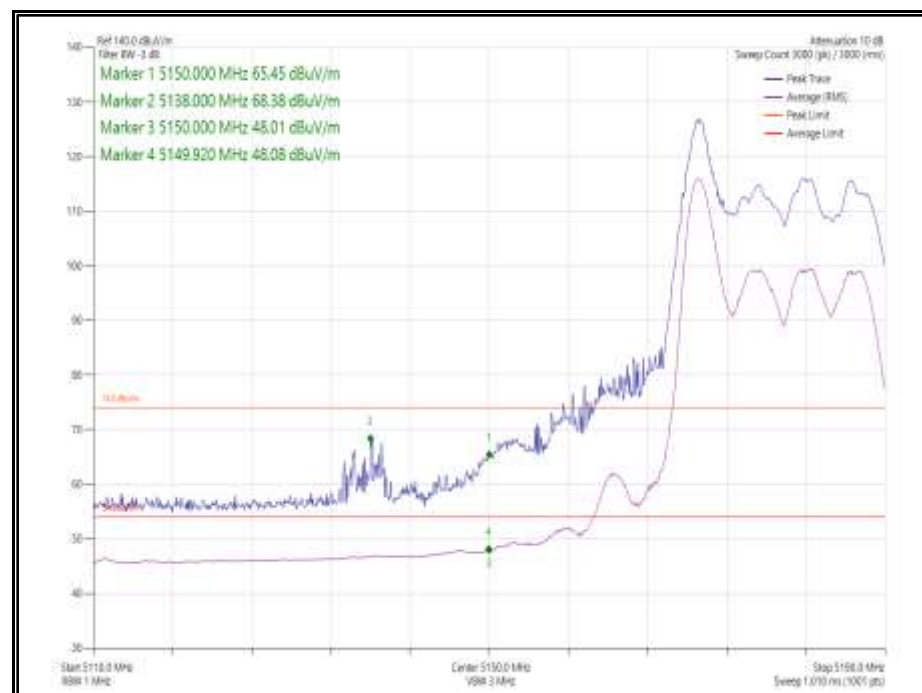


**Figure 18 - 802.11ax HE20 SDM, Cores 0-1, 26-0 - 5180 MHz
Band Edge Frequency 5150 MHz**

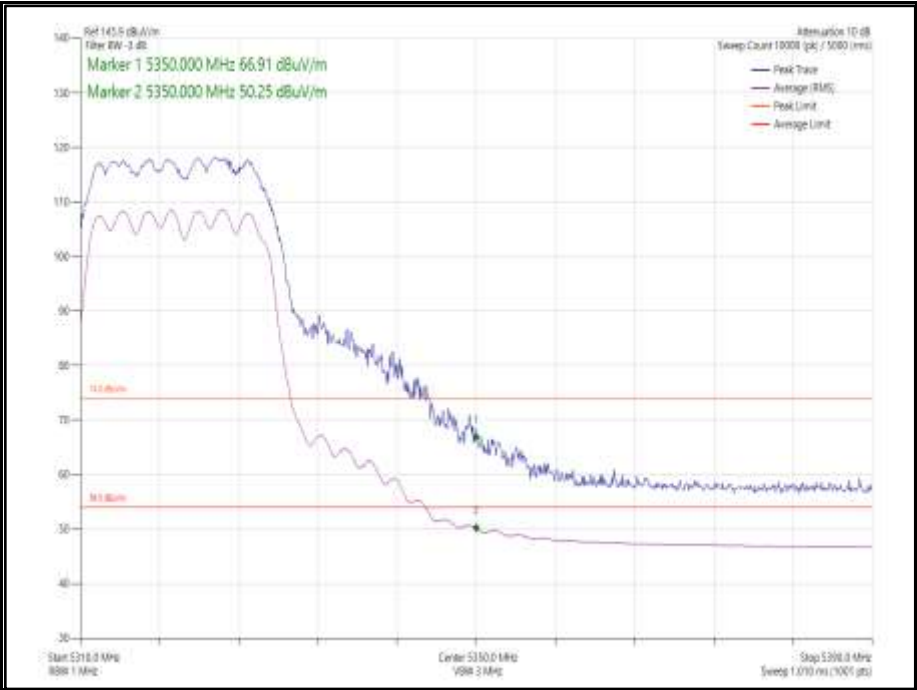


Figure 19 - 802.11n HT20 CDD, Cores 0-1 - 5320 MHz
Band Edge Frequency 5350 MHz

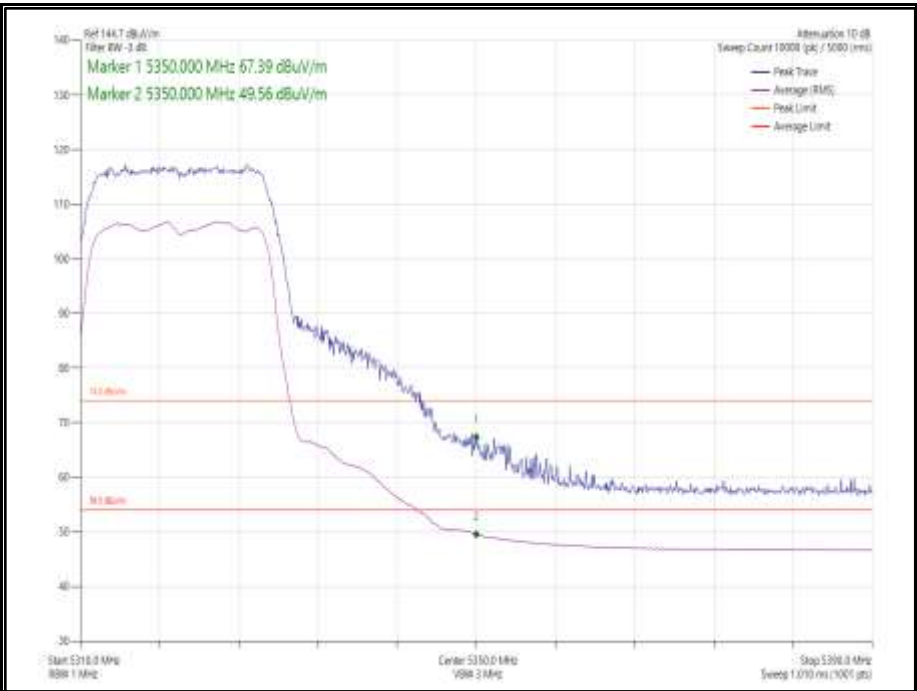


Figure 20 - 802.11n HT20 SDM, Cores 0-1 - 5320 MHz
Band Edge Frequency 5350 MHz

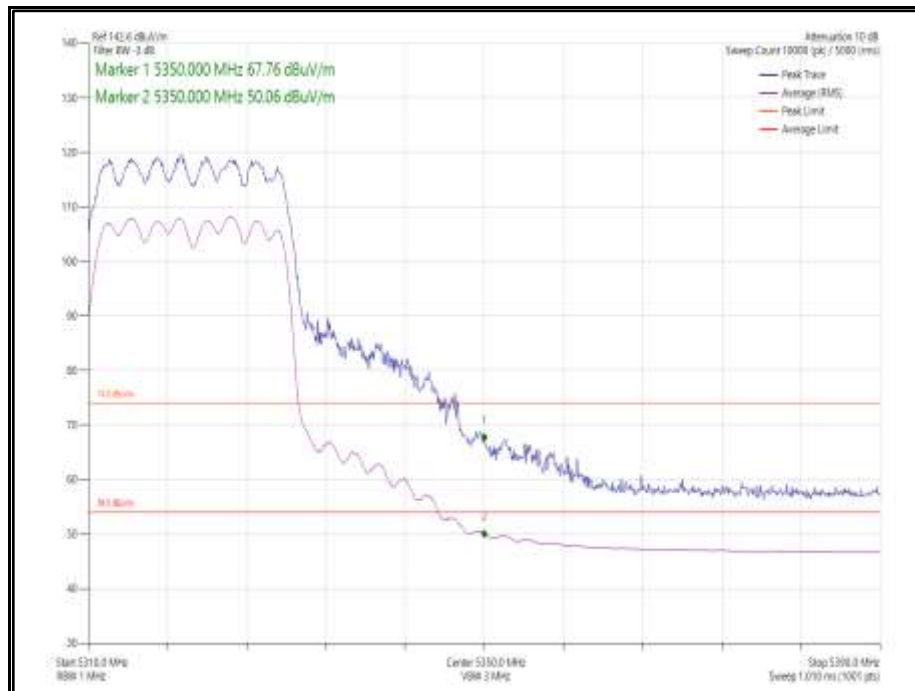


**Figure 21 - 802.11ax HE20 CDD, Cores 0-1, SU - 5320 MHz
Band Edge Frequency 5350 MHz**

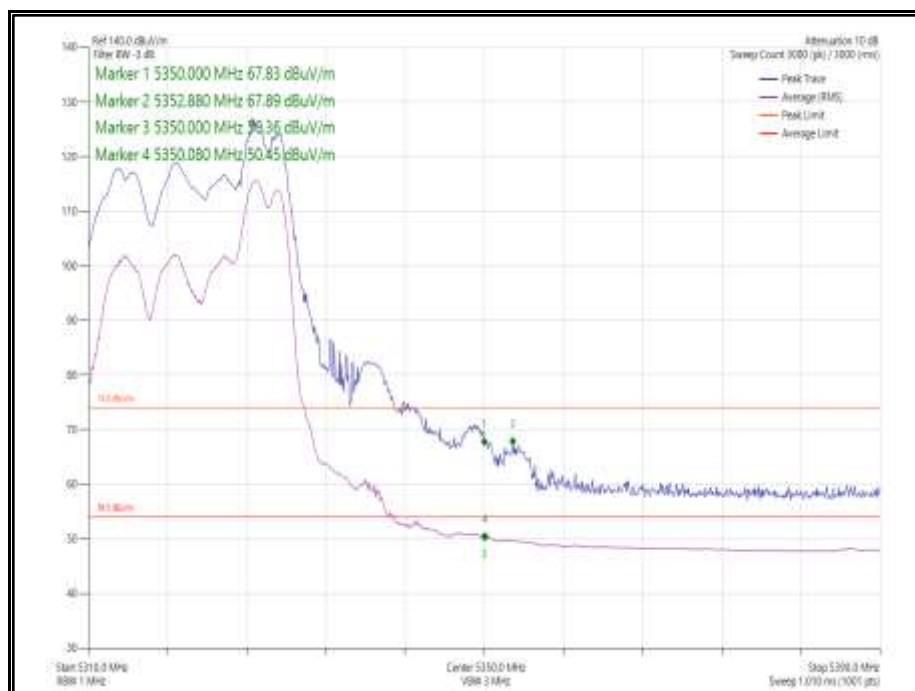


**Figure 22 - 802.11ax HE20 CDD, Cores 0-1, 52-40 - 5320 MHz
Band Edge Frequency 5350 MHz**

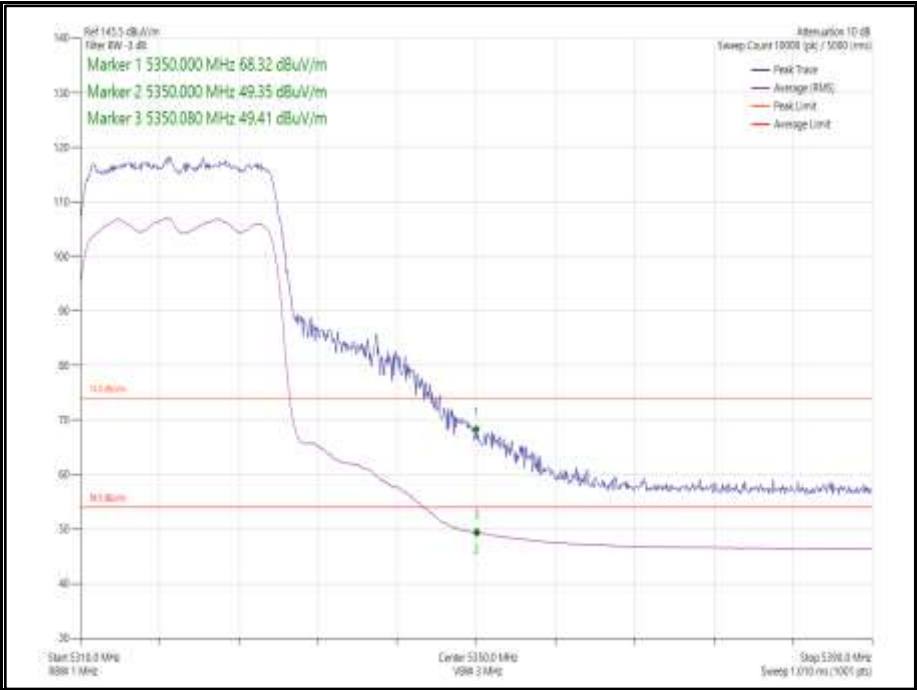


Figure 23 - 802.11ax HE20 SDM, Cores 0-1, SU - 5320 MHz
Band Edge Frequency 5350 MHz

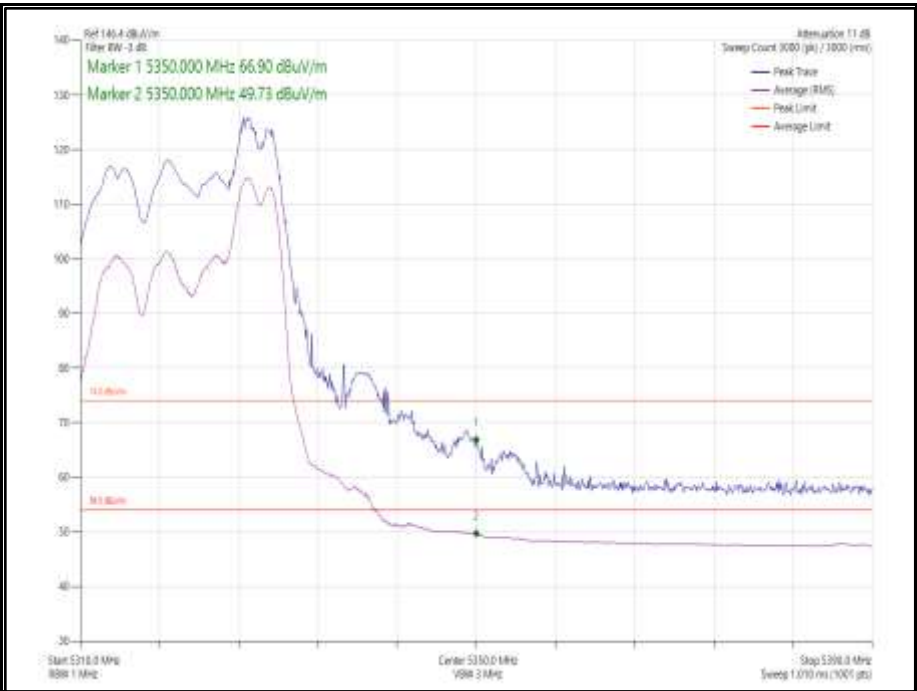


Figure 24 - 802.11ax HE20 SDM, Cores 0-1, 52-40 - 5320 MHz
Band Edge Frequency 5350 MHz

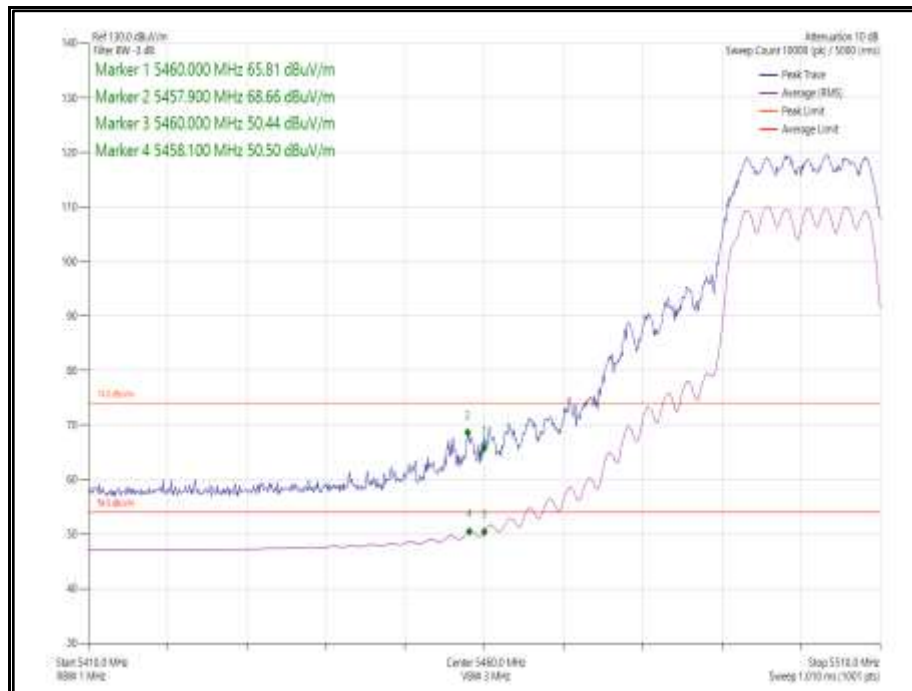


**Figure 25 - 802.11n HT20 CDD, Cores 0-1 - 5500 MHz
Band Edge Frequency 5460 MHz**

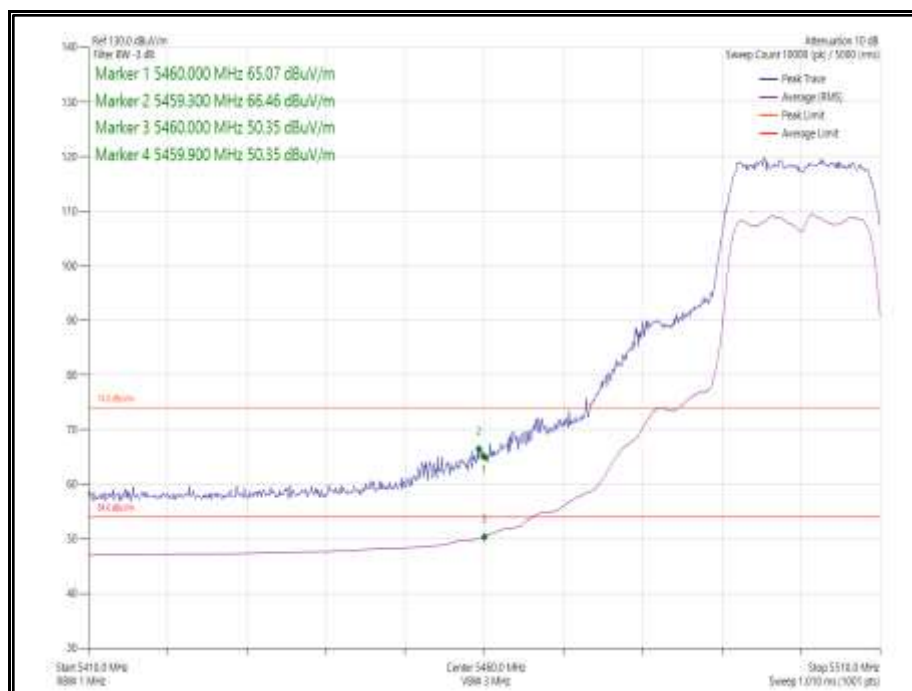


**Figure 26 - 802.11n HT20 SDM, Cores 0-1 - 5500 MHz
Band Edge Frequency 5460 MHz**

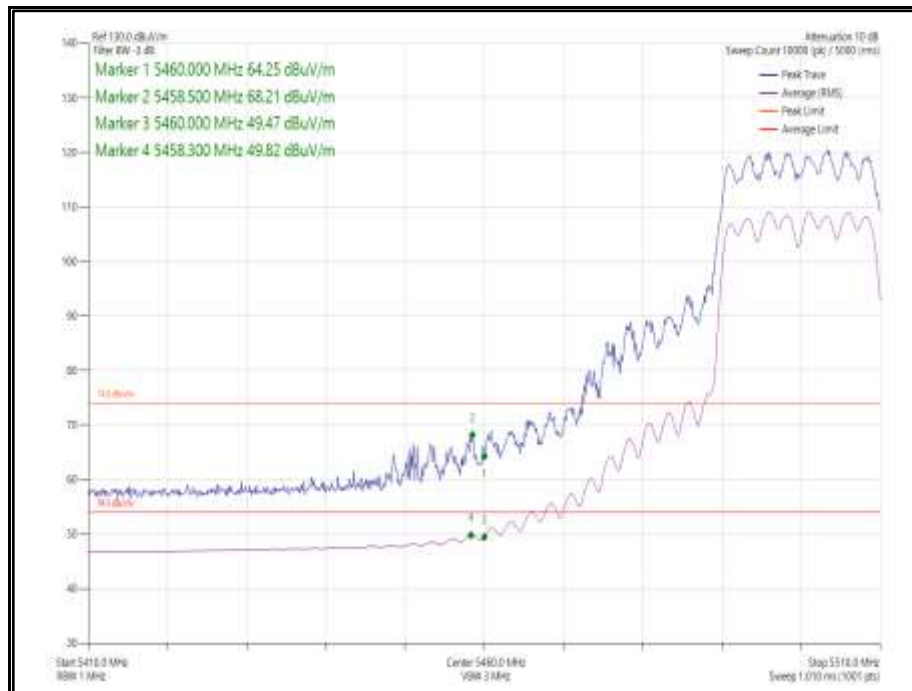


**Figure 27 - 802.11ax HE20 CDD, Cores 0-1, SU- 5500 MHz
Band Edge Frequency 5460 MHz**



**Figure 28 - 802.11ax HE20 CDD, Cores 0-1, 52-37 - 5500 MHz
Band Edge Frequency 5460 MHz**



Figure 29 - 802.11ax HE20 SDM, Cores 0-1, SU- 5500 MHz
Band Edge Frequency 5460 MHz

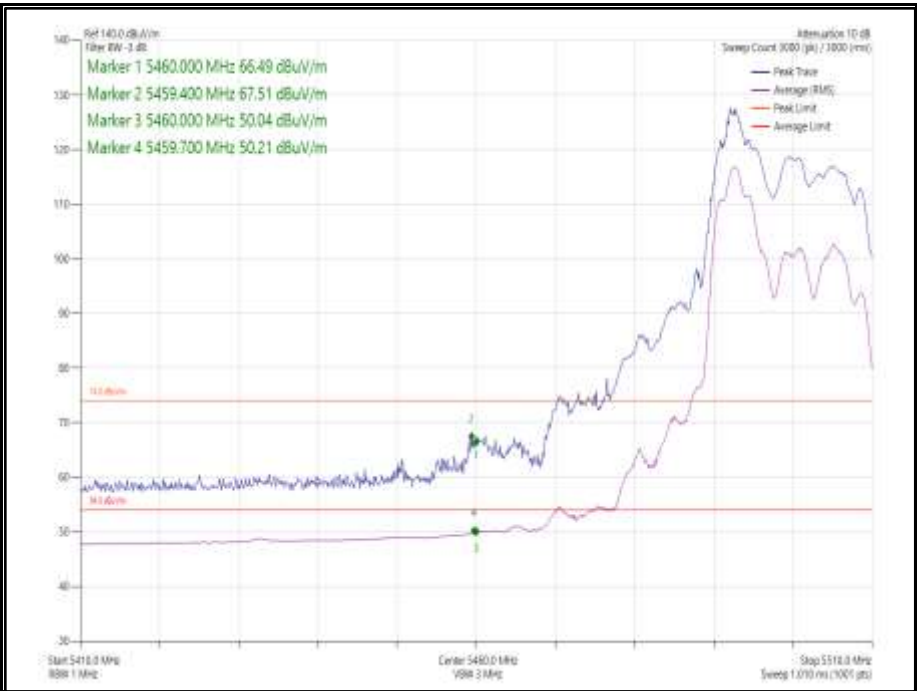


Figure 30 - 802.11ax HE20 SDM, Cores 0-1, 52-37 - 5500 MHz
Band Edge Frequency 5460 MHz



Mode	Data Rate/ MCS	Resource Size	Resource Index	TX Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dBμV/m)	Average Level (dBμV/m)
802.11n HT40, Core 0	MCS7	-	-	5190	5150	68.33	49.00
802.11ax HE40, Core 0	MCS11x1	SU	-	5190	5150	68.4	49.48
802.11ax HE40, Core 0	MCS11x1	26	0	5190	5150	68.89	47.38
802.11n HT40, Core 0	MCS7	-	-	5310	5350	65.04	50.24
802.11ax HE40, Core 0	MCS11x1	SU	-	5310	5350	65.58	50.38
802.11ax HE40, Core 0	MCS11x1	52	44	5310	5350	68.72	47.64
802.11n HT40, Core 0	MCS7	-	-	5510	5460	68.07	50.99
802.11ax HE40, Core 0	MCS11x1	SU	-	5510	5460	68.42	50.59
802.11ax HE40, Core 0	MCS11x1	52	37	5510	5460	68.95	48.95

Table 8 - 40 MHz Bandwidth SISO Restricted Band Edge Results

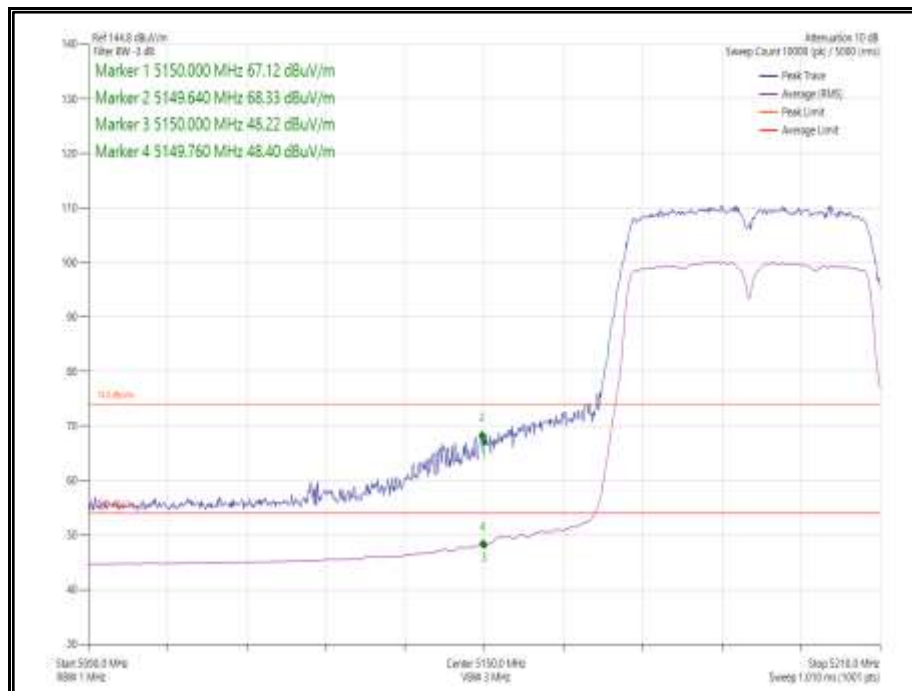


**Figure 31 - 802.11n HT40, Core 0 - 5190 MHz
Band Edge Frequency 5150 MHz**

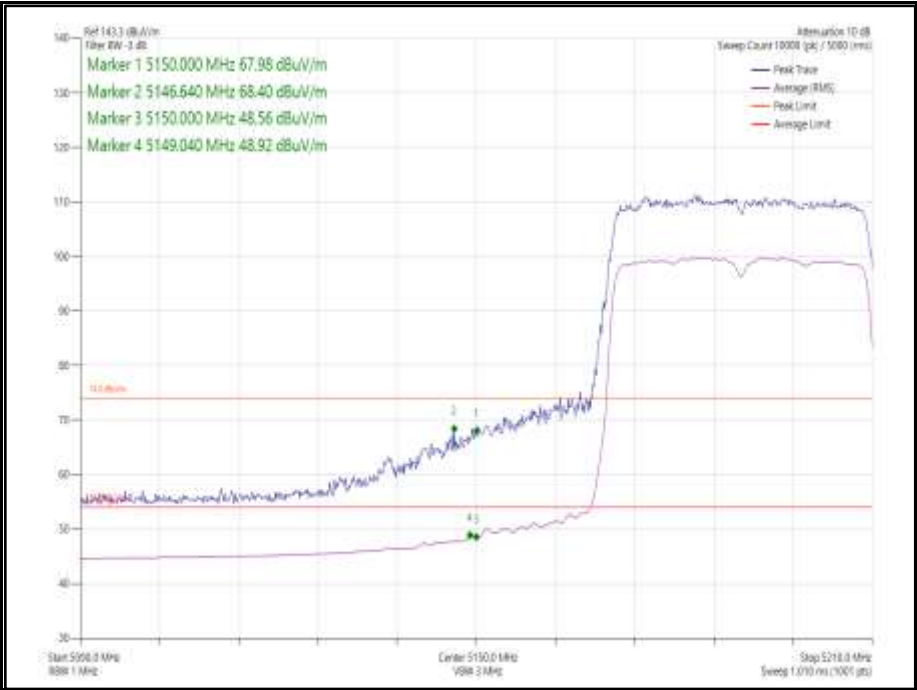


Figure 32 - 802.11ax HE40, Core 0, SU - 5190 MHz
Band Edge Frequency 5150 MHz

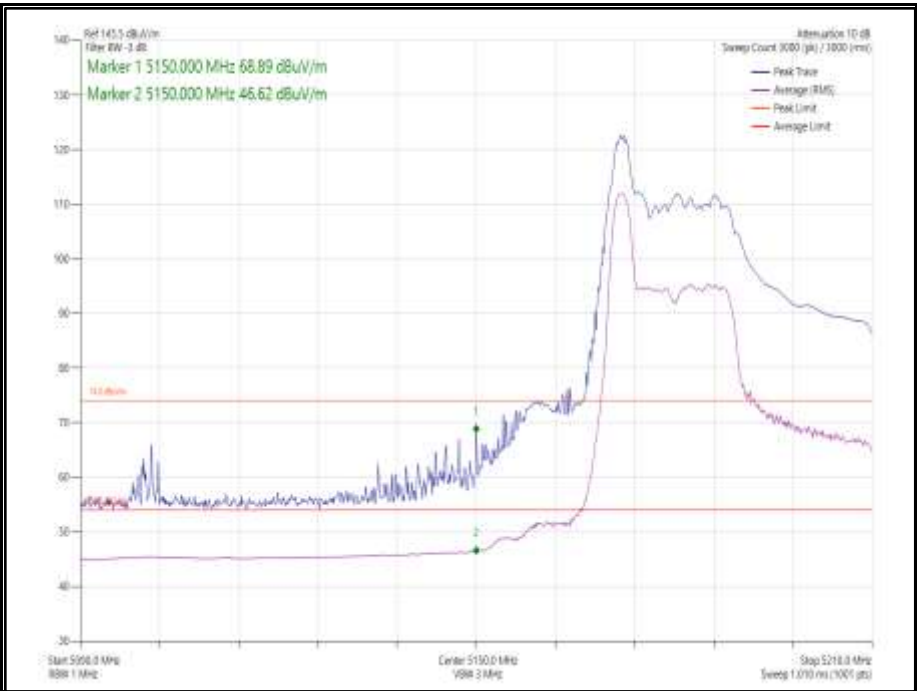


Figure 33 - 802.11ax HE40, Core 0, 26-0 - 5190 MHz
Band Edge Frequency 5150 MHz

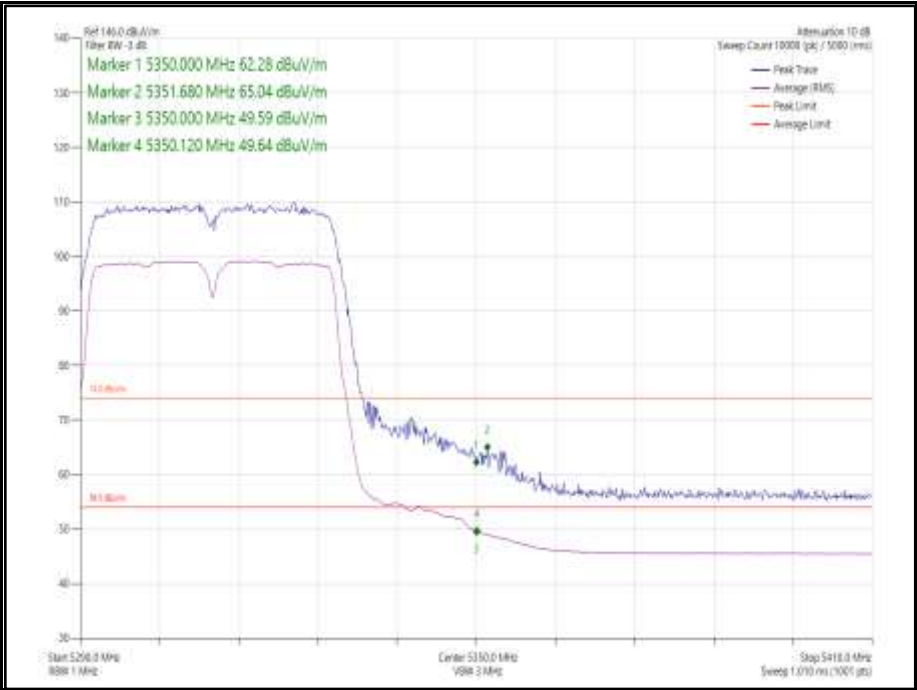


Figure 34 - 802.11n HT40, Core 0 - 5310 MHz
Band Edge Frequency 5350 MHz

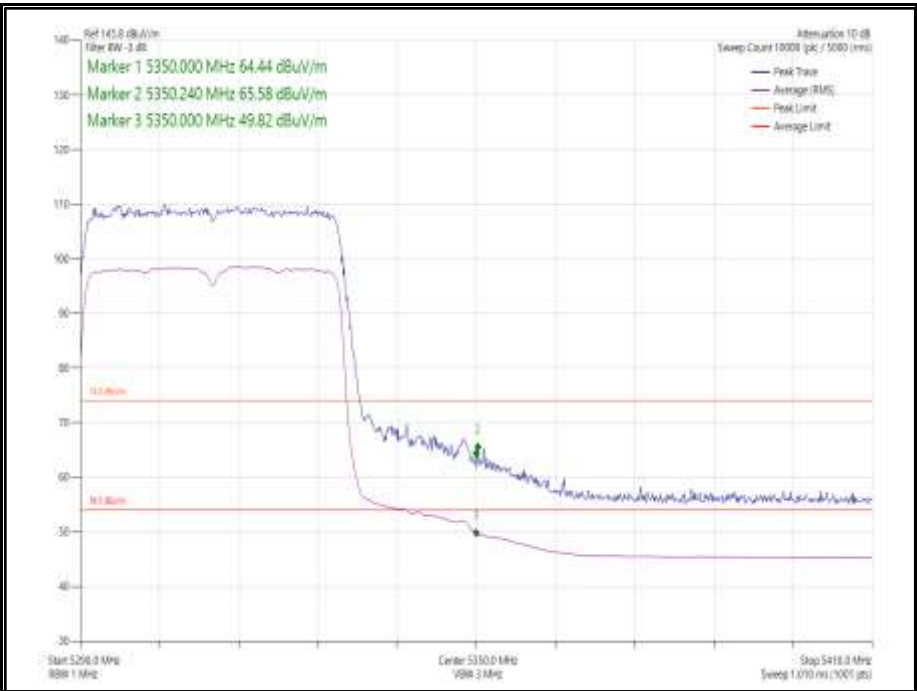


Figure 35 - 802.11ax HE40, Core 0, SU - 5310 MHz
Band Edge Frequency 5350 MHz

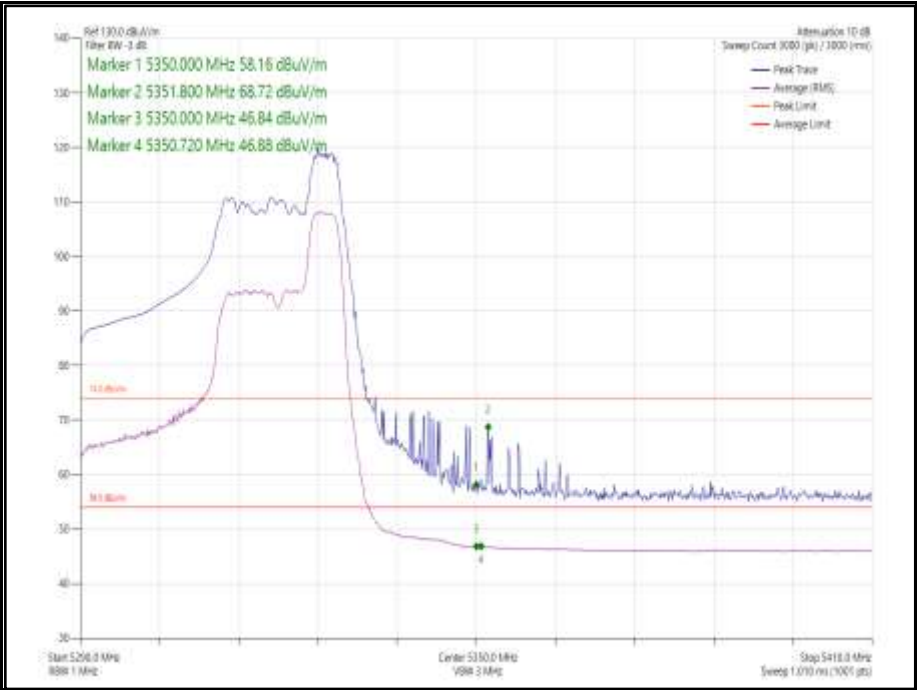


Figure 36 - 802.11ax HE40, Core 0, 52-44 - 5310 MHz
Band Edge Frequency 5350 MHz

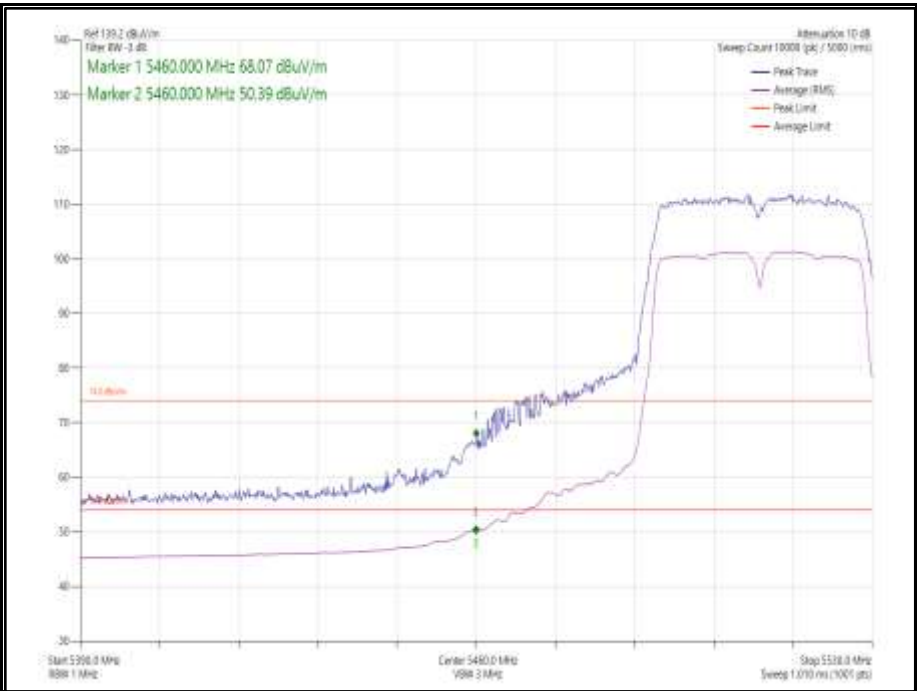


Figure 37 - 802.11n HT40, Core 0 - 5510 MHz
Band Edge Frequency 5460 MHz

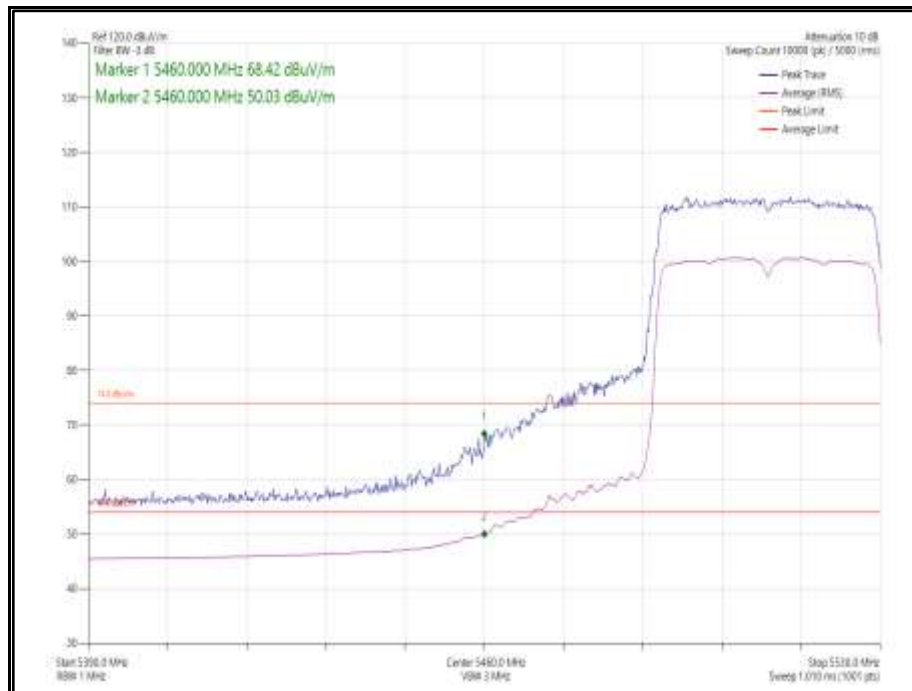


**Figure 38 - 802.11ax HE40, Core 0, SU - 5510 MHz
Band Edge Frequency 5460 MHz**

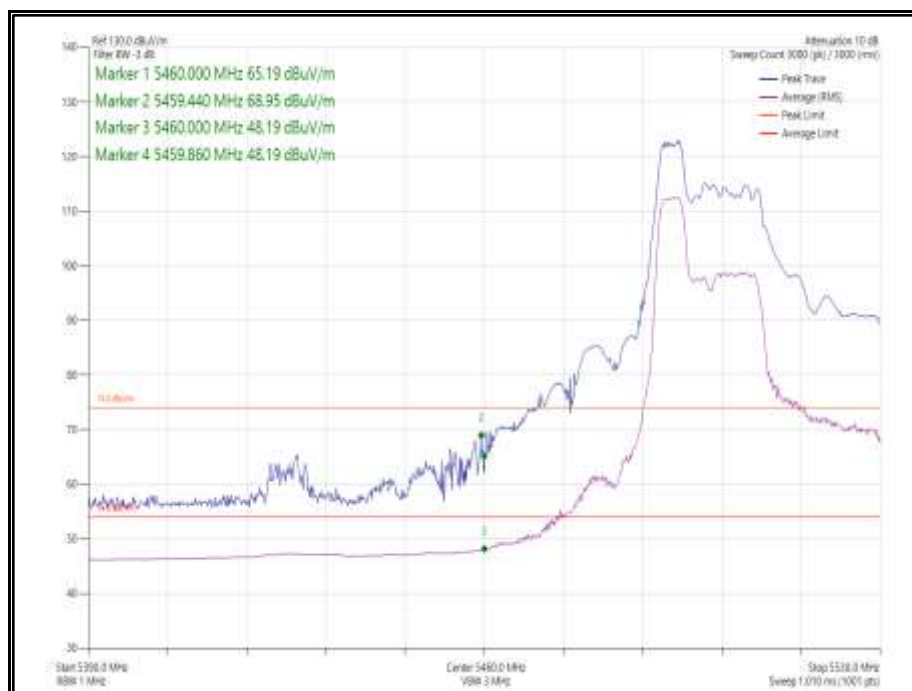


**Figure 39 - 802.11ax HE40, Core 0, 52-37- 5510 MHz
Band Edge Frequency 5460 MHz**



Mode	Data Rate/ MCS	Resource Size	Resource Index	TX Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dBμV/m)	Average Level (dBμV/m)
802.11n HT40 CDD, Cores 0-1	MCS7	-	-	5190	5150	68.83	50.35
802.11n HT40 SDM, Cores 0-1	MCS15	-	-	5190	5150	67.46	50.36
802.11ax HE40 CDD, Cores 0-1	MCS11x1	SU	-	5190	5150	67.27	50.33
802.11ax HE40 CDD, Cores 0-1	MCS11x1	26	0	5190	5150	68.67	48.06
802.11ax HE40 SDM, Cores 0-1	MCS11x2	SU	-	5190	5150	68.33	50.79
802.11ax HE40 SDM, Cores 0-1	MCS11x2	26	0	5190	5150	68.70	47.41
802.11n HT40 CDD, Cores 0-1	MCS7	-	-	5310	5350	66.96	50.60
802.11n HT40 SDM, Cores 0-1	MCS15	-	-	5310	5350	64.30	50.71
802.11ax HE40 CDD, Cores 0-1	MCS11x1	SU	-	5310	5350	65.03	50.84
802.11ax HE40 CDD, Cores 0-1	MCS11x1	52	44	5310	5350	69.14	48.09
802.11ax HE40 SDM, Cores 0-1	MCS11x2	SU	-	5310	5350	65.72	50.87
802.11ax HE40 SDM, Cores 0-1	MCS11x2	52	44	5310	5350	68.42	47.94
802.11n HT40 CDD, Cores 0-1	MCS7	-	-	5510	5460	66.94	50.69
802.11n HT40 SDM, Cores 0-1	MCS15	-	-	5510	5460	66.41	50.53
802.11ax HE40 CDD, Cores 0-1	MCS11x1	SU	-	5510	5460	68.30	50.45
802.11ax HE40 CDD, Cores 0-1	MCS11x1	52	37	5510	5460	68.89	49.29
802.11ax HE40 SDM, Cores 0-1	MCS11x2	SU	-	5510	5460	65.60	50.44
802.11ax HE40 SDM, Cores 0-1	MCS11x2	52	37	5510	5460	68.03	49.05

Table 9 – 40 MHz Bandwidth 2TX MIMO Restricted Band Edge Results

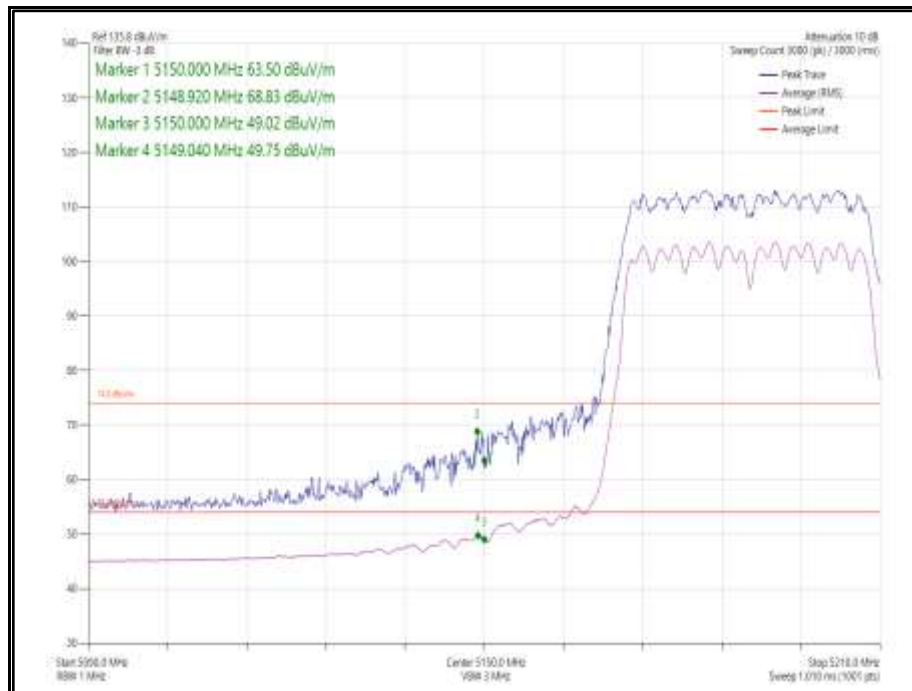


**Figure 40 - 802.11n HT40 CDD Cores 0-1 - 5190 MHz
Band Edge Frequency 5150 MHz**

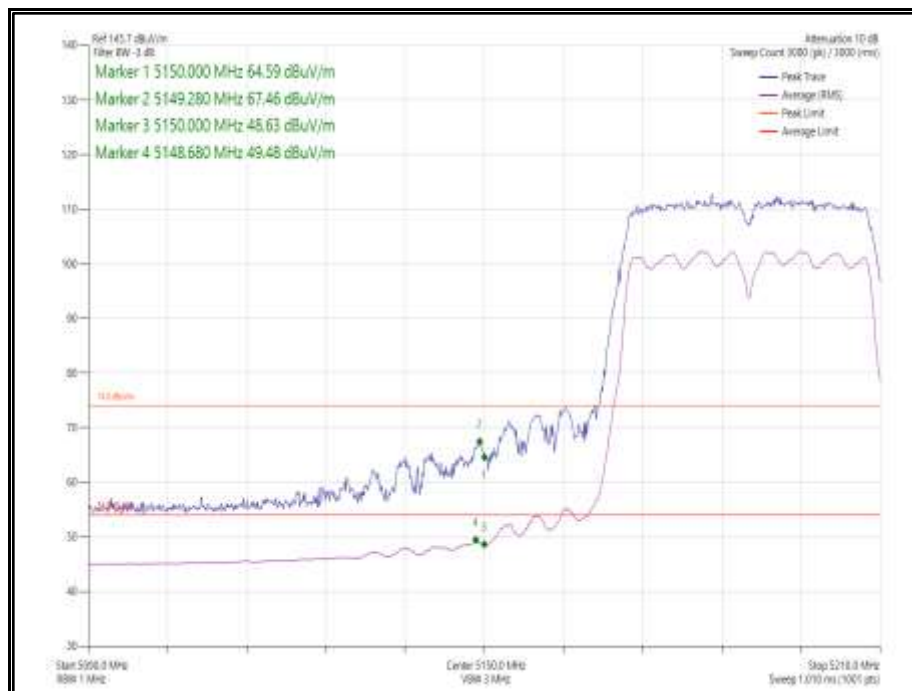


**Figure 41 - 802.11n HT40 SDM Cores 0-1 - 5190 MHz
Band Edge Frequency 5150 MHz**

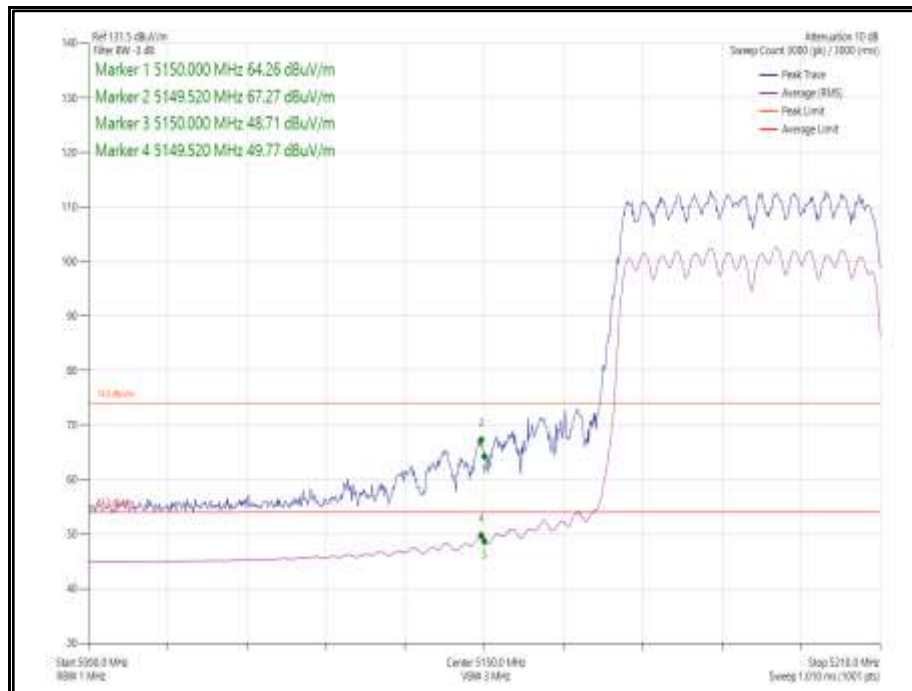


**Figure 42 - 802.11ax HE40 CDD, Cores 0-1, SU - 5190 MHz
Band Edge Frequency 5150 MHz**

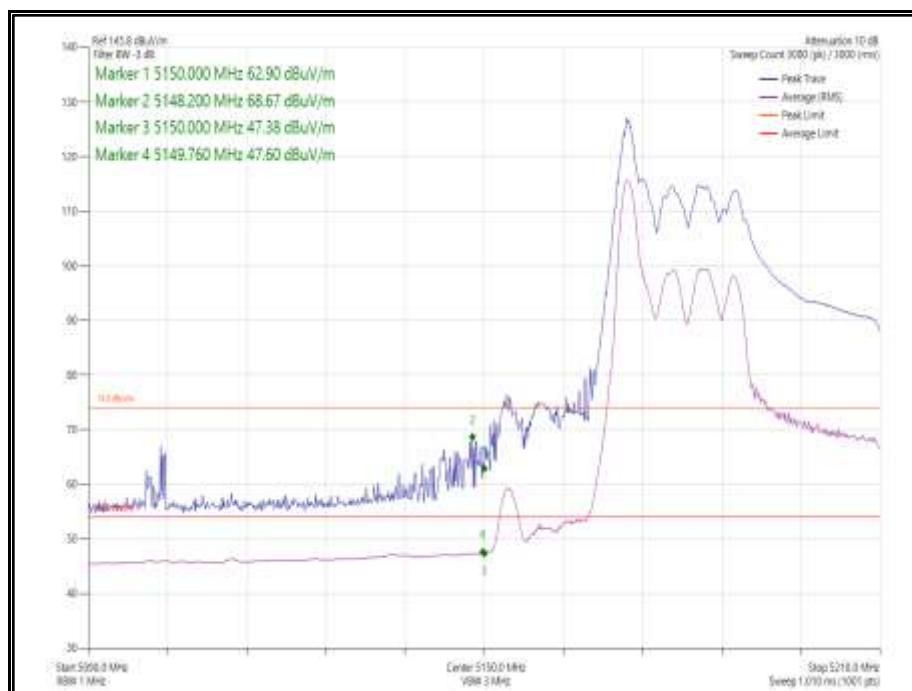


**Figure 43 - 802.11ax HE40 CDD, Cores 0-1, 26-0 - 5190 MHz
Band Edge Frequency 5150 MHz**

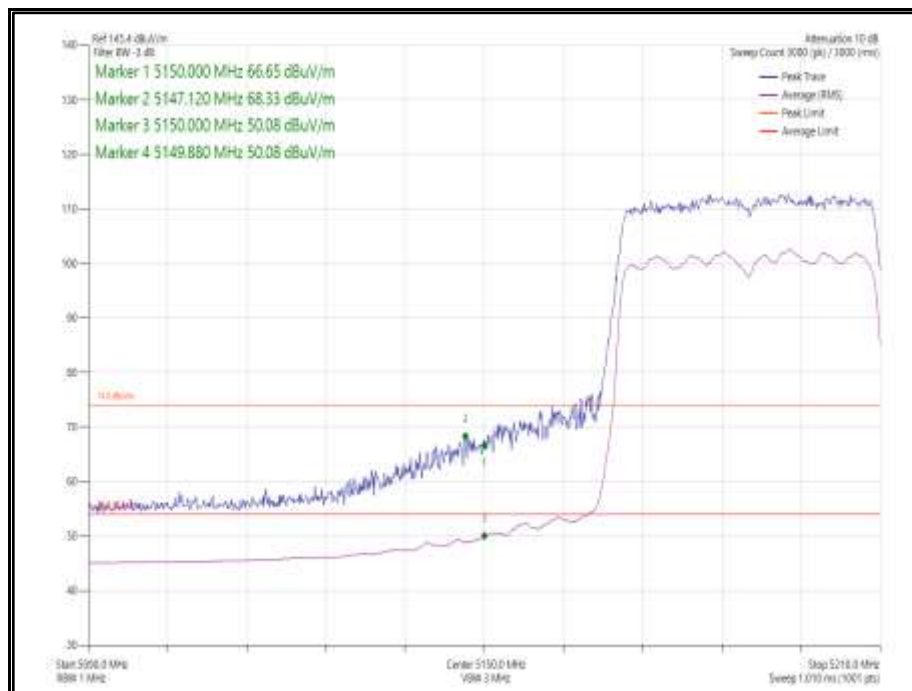


**Figure 44 802.11ax HE40 SDM, Cores 0-1, SU - 5190 MHz
Band Edge Frequency 5150 MHz**

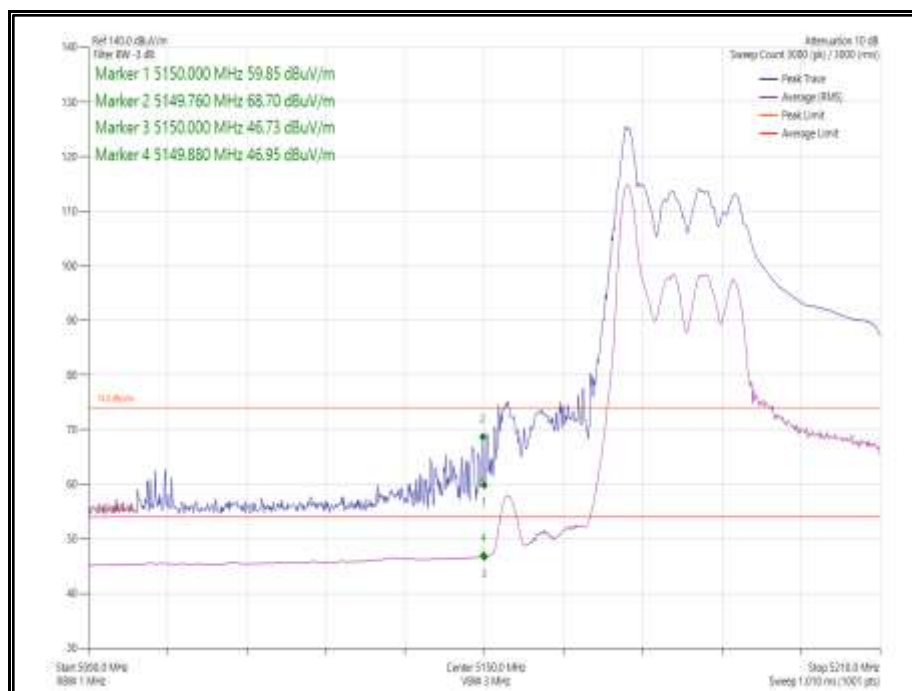


**Figure 45 - 802.11ax HE40 SDM, Cores 0-1, 26-0 - 5190 MHz
Band Edge Frequency 5150 MHz**

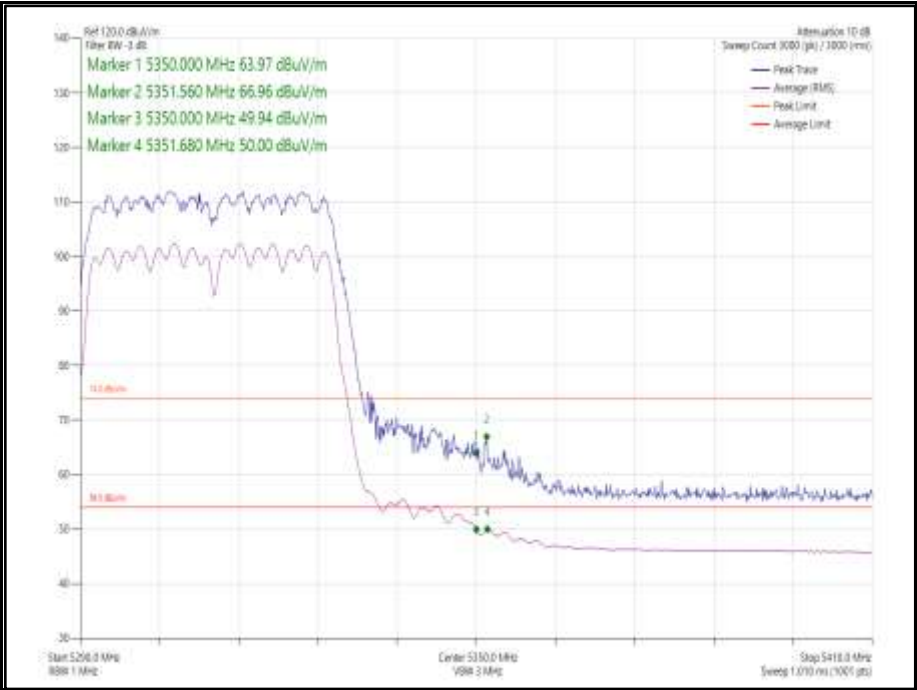


Figure 46 - 802.11n HT40 CDD, Cores 0-1 - 5310 MHz
Band Edge Frequency 5350 MHz

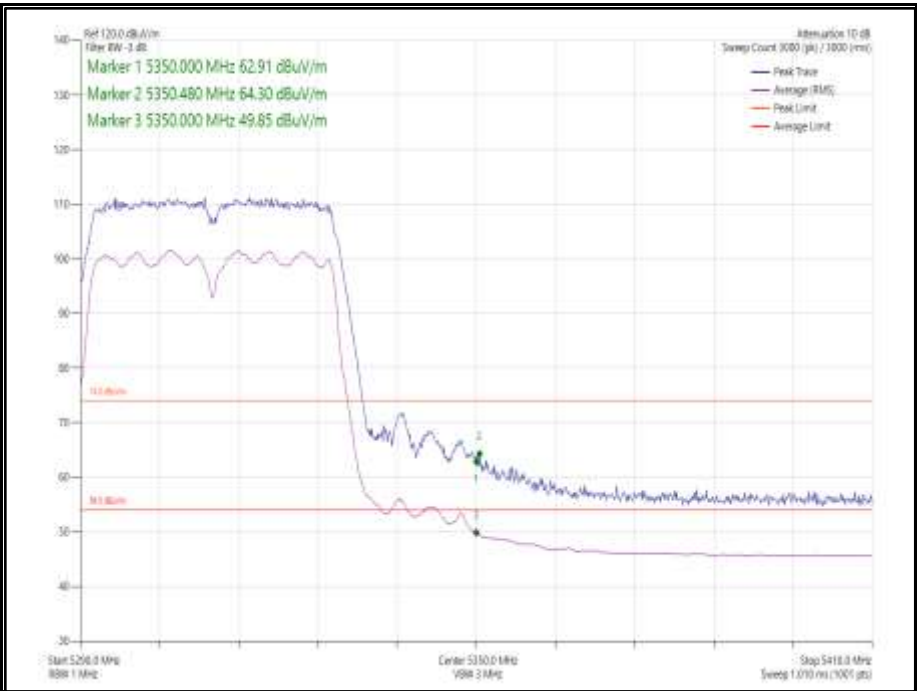


Figure 47 - 802.11n HT40 SDM, Cores 0-1 - 5310 MHz
Band Edge Frequency 5350 MHz

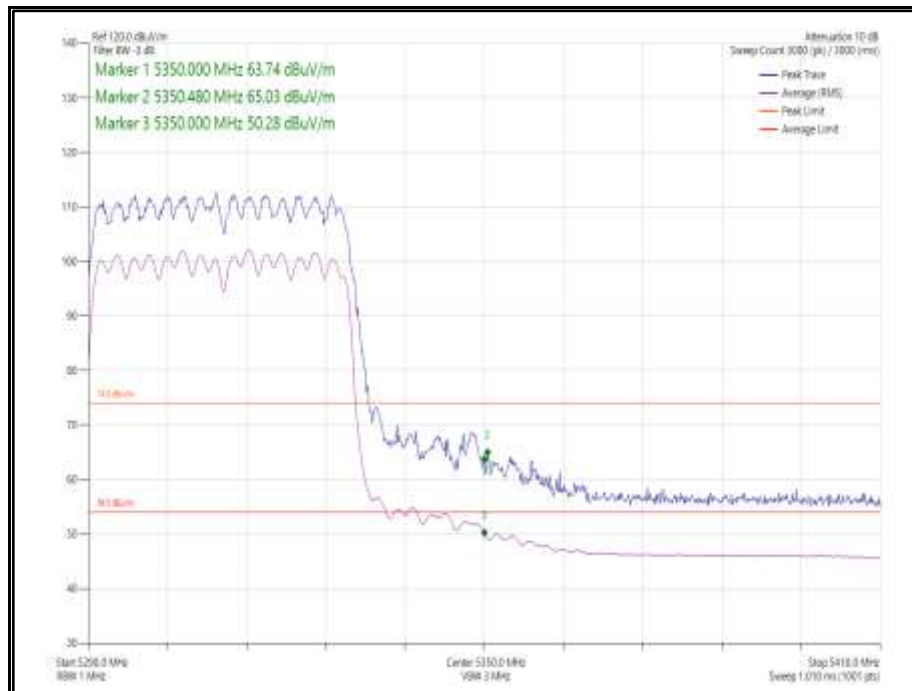


**Figure 48 - 802.11ax HE40 CDD, Cores 0-1, SU - 5310 MHz
Band Edge Frequency 5350 MHz**

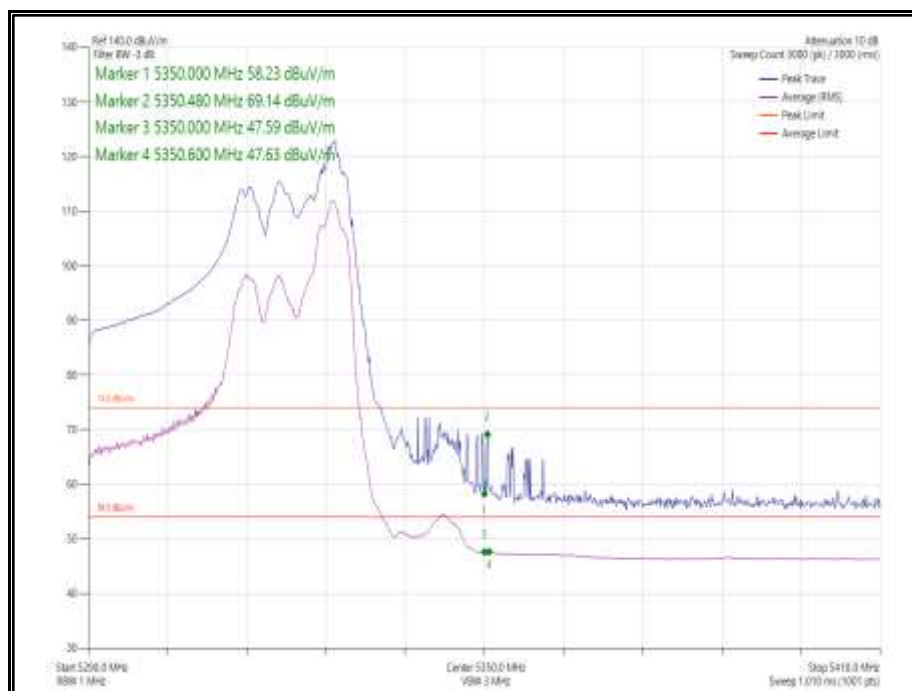


**Figure 49 - 802.11ax HE40 CDD, Cores 0-1, 52-44- 5310 MHz
Band Edge Frequency 5350 MHz**

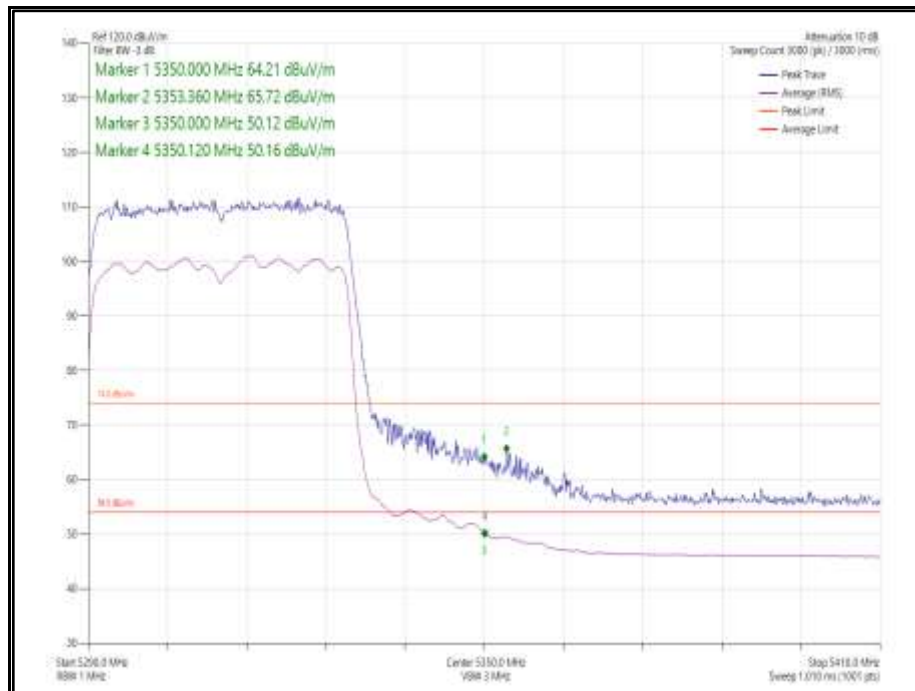


**Figure 50 - 802.11ax HE40 SDM, Cores 0-1, SU - 5310 MHz
Band Edge Frequency 5350 MHz**

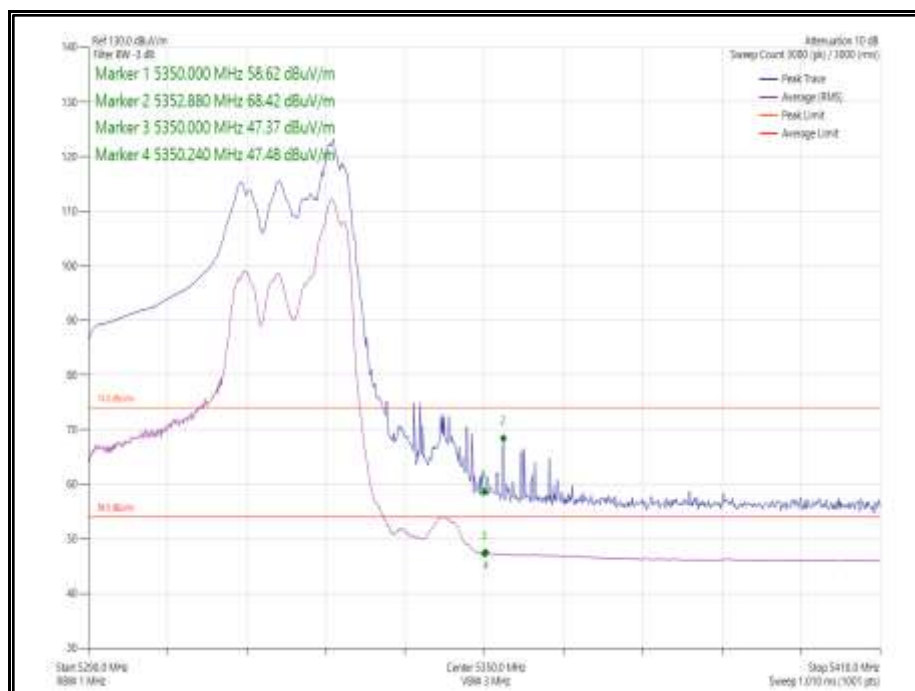


**Figure 51 - 802.11ax HE40 SDM, Cores 0-1, 52-44 - 5310 MHz
Band Edge Frequency 5350 MHz**

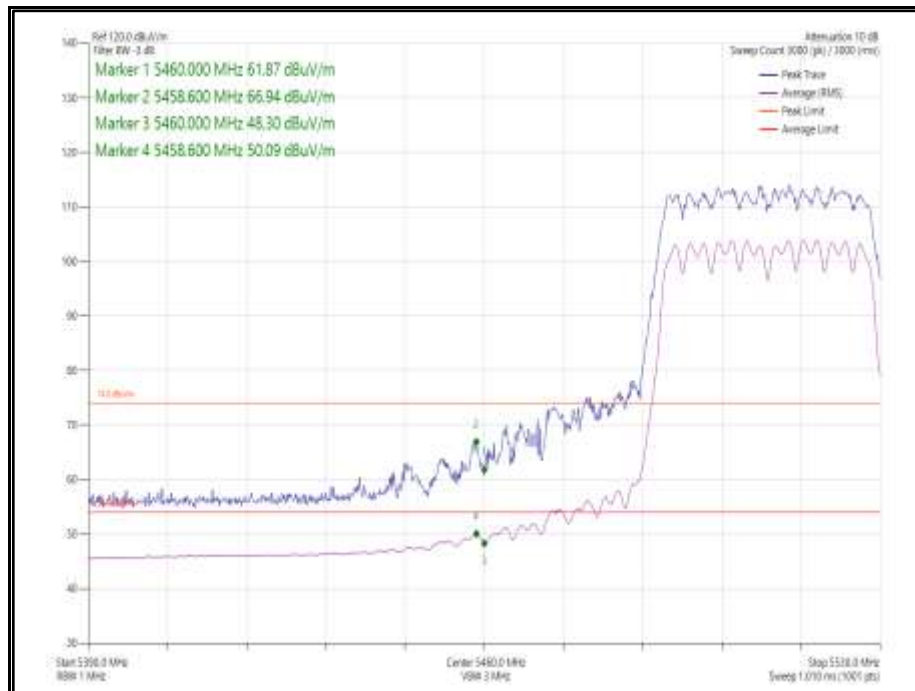


**Figure 52 - 802.11n HT40 CDD, Cores 0-1 - 5510 MHz
Band Edge Frequency 5460 MHz**

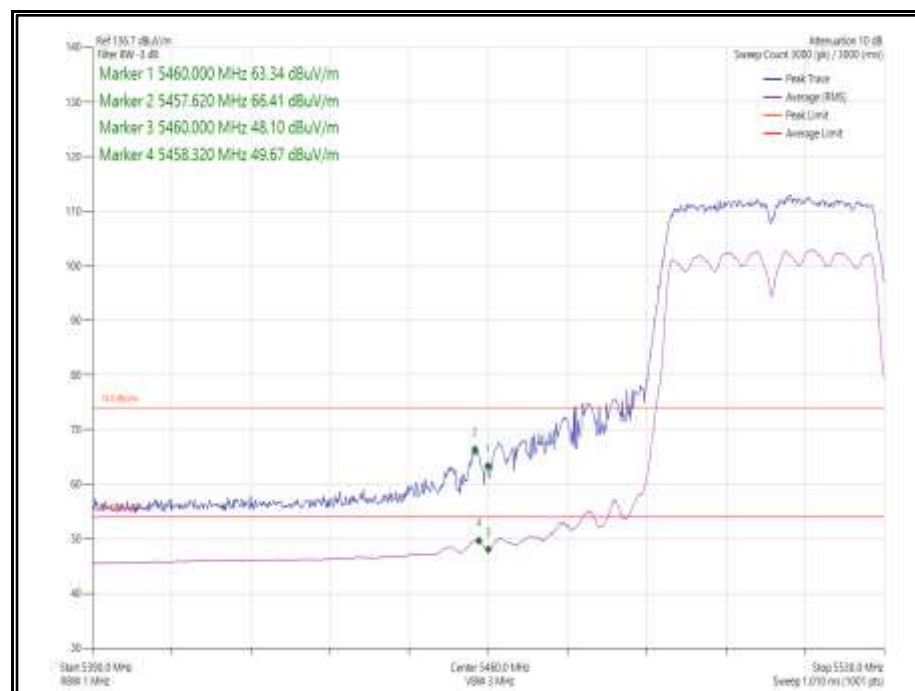


**Figure 53 - 802.11n HT40 SDM, Cores 0-1 - 5510 MHz
Band Edge Frequency 5460 MHz**

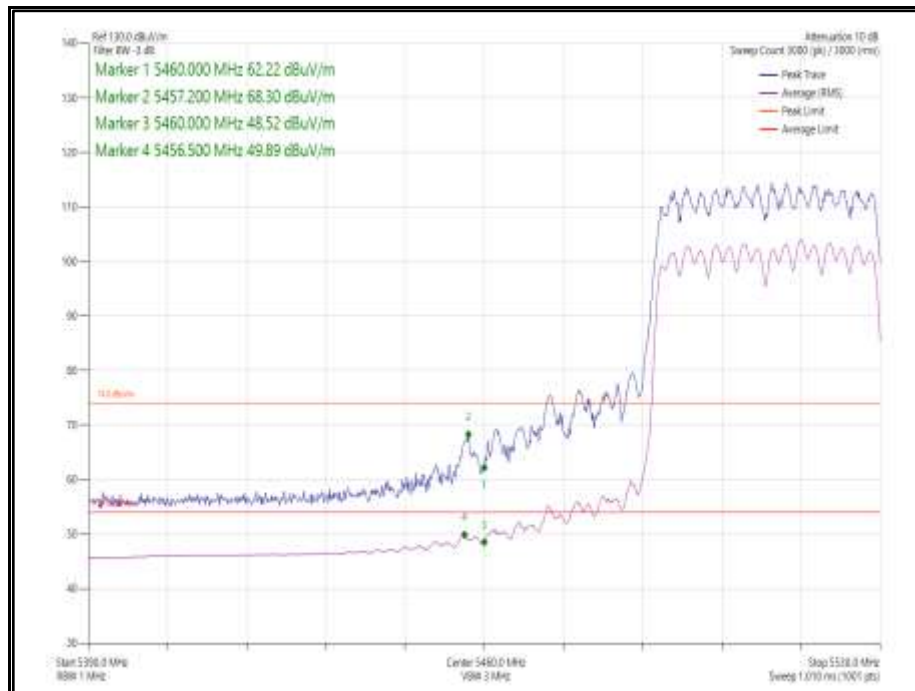


**Figure 54 - 802.11ax HE40 CDD, Cores 0-1, SU - 5510 MHz
Band Edge Frequency 5460 MHz**

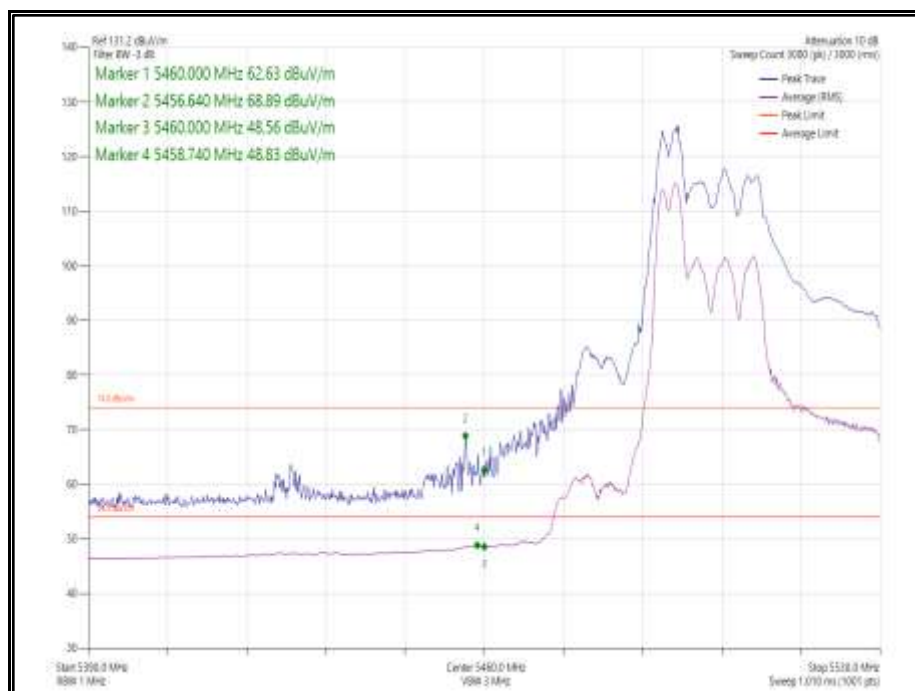


**Figure 55 - 802.11ax HE40 CDD, Cores 0-1, 26-0 - 5510 MHz
Band Edge Frequency 5460 MHz**

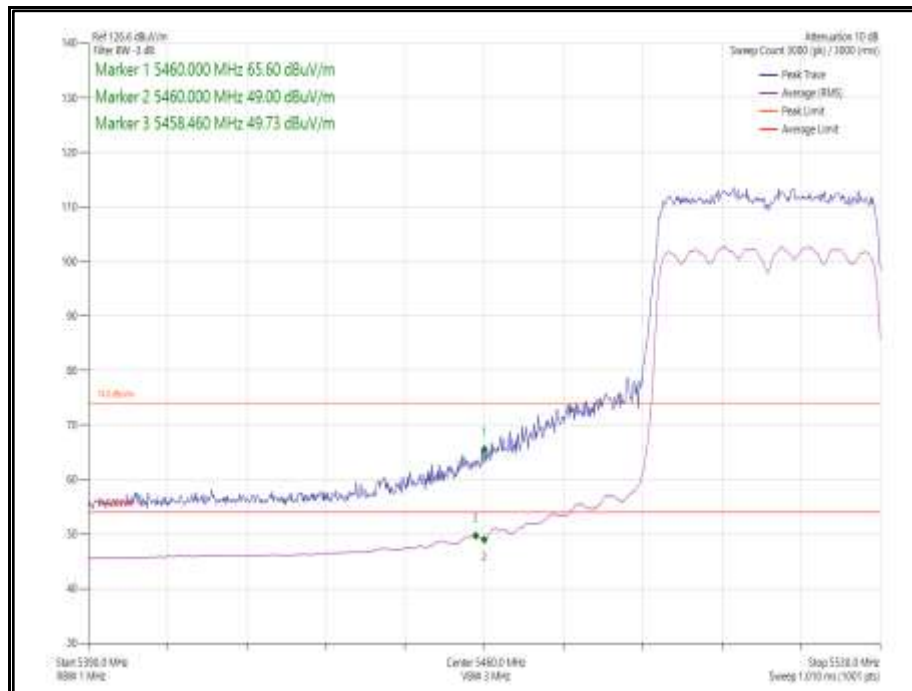


**Figure 56 - 802.11ax HE40 SDM, Cores 0-1, SU - 5510 MHz
Band Edge Frequency 5460 MHz**

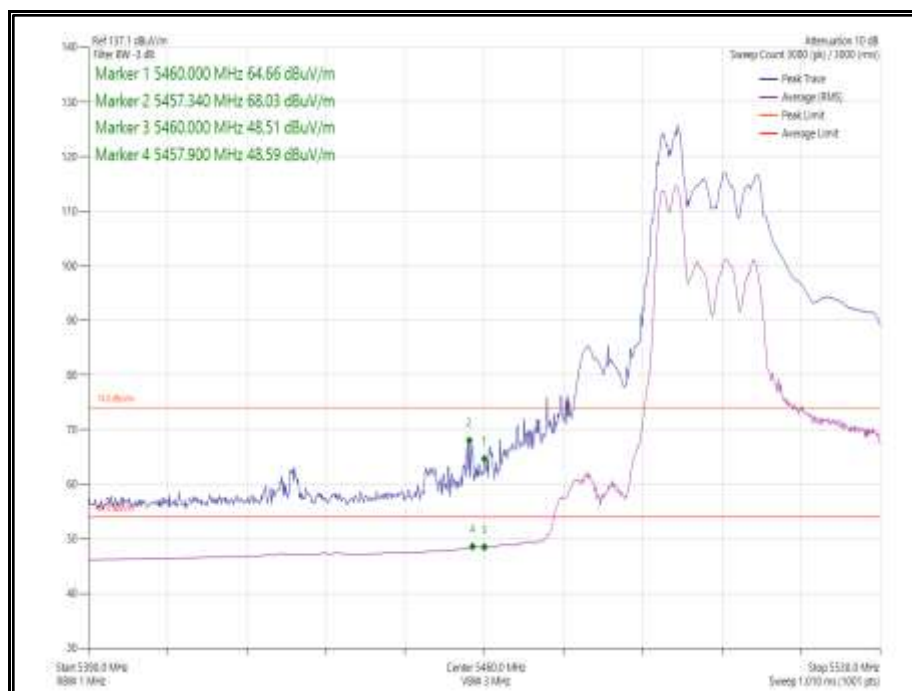


**Figure 57 - 802.11ax HE40 SDM, Cores 0-1, 52-37 - 5510 MHz
Band Edge Frequency 5460 MHz**



Mode	Data Rate/ MCS	Resource Size	Resource Index	TX Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dBμV/m)	Average Level (dBμV/m)
802.11ac VHT80, Core 0	MCS7x1	-	-	5210	5150	67.44	50.30
802.11ac VHT80, Core 0	MCS4x1	-	-	5290	5350	63.46	50.34
802.11ac VHT80, Core 0	MCS7x1	-	-	5530	5460	64.3	49.22
802.11ax HE80, Core 0	MCS11x1	SU	-	5210	5150	65.33	50.34
802.11ax HE80, Core 0	MCS11x1	26	0	5210	5150	68.48	50.11
802.11ax HE80, Core 0	MCS11x1	SU	-	5290	5350	63.59	50.15
802.11ax HE80, Core 0	MCS11x1	52	52	5290	5350	68.06	47.22
802.11ax HE80, Core 0	MCS11x1	SU	-	5530	5460	64.28	50.06
802.11ax HE80, Core 0	MCS11x1	52	37	5530	5460	68.26	49.86

Table 10 - 80 MHz Bandwidth SISO Restricted Band Edge Results

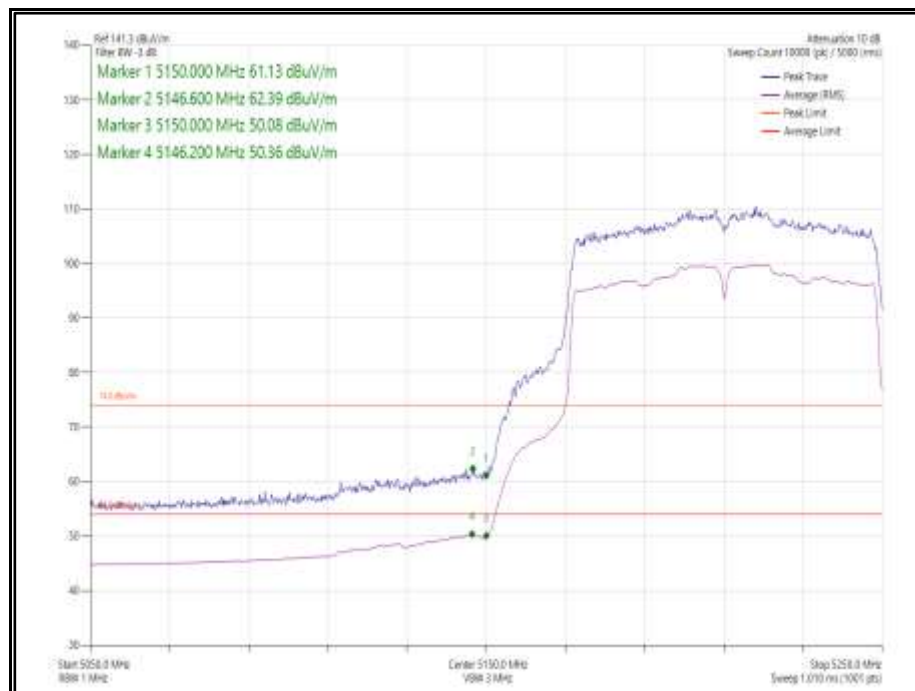


**Figure 58 - 802.11ac VHT80, Core 0 - 5210 MHz
Band Edge Frequency 5150 MHz**



Figure 59 - 802.11ac VHT80, Core 0 - 5290 MHz
Band Edge Frequency 5350 MHz

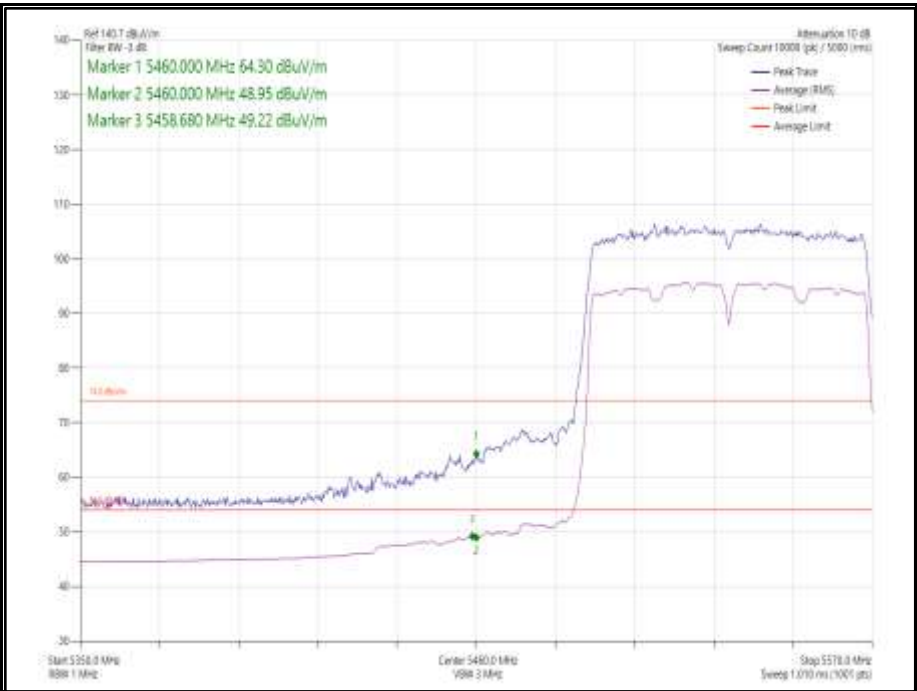


Figure 60 - 802.11ac VHT80, Core 0 - 5530 MHz
Band Edge Frequency 5460 MHz

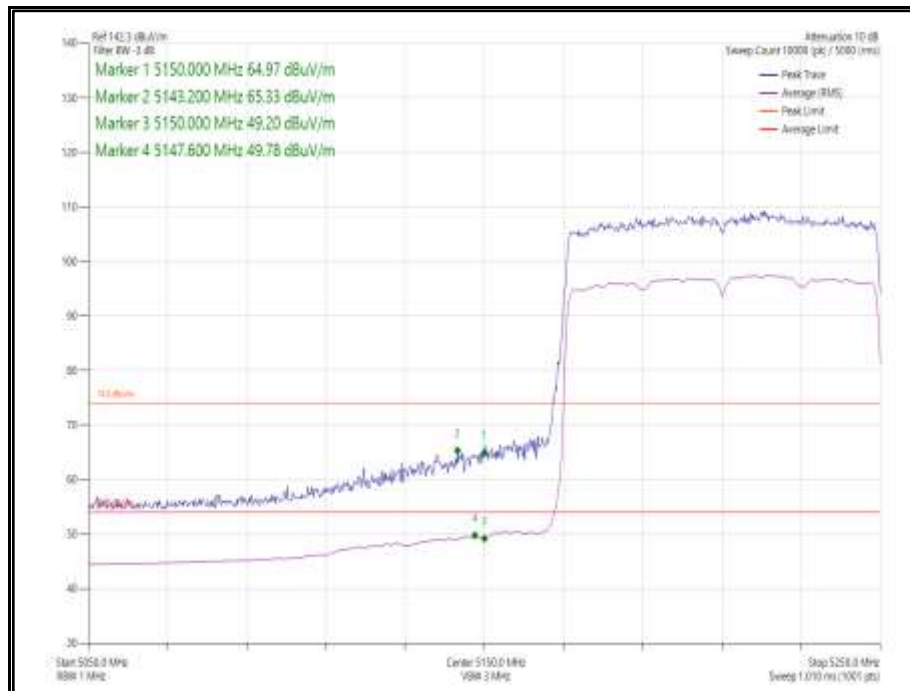


**Figure 61 - 802.11ax HE80, Core 0, SU - 5210 MHz
Band Edge Frequency 5150 MHz**

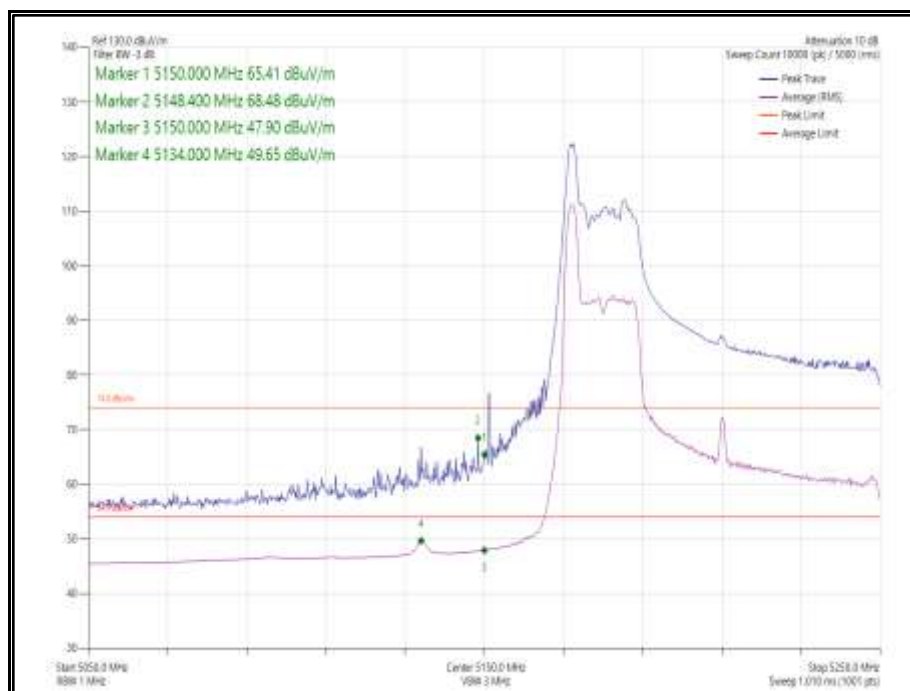


**Figure 62 - 802.11ax HE80, Core 0, 26-0 - 5210 MHz
Band Edge Frequency 5150 MHz**

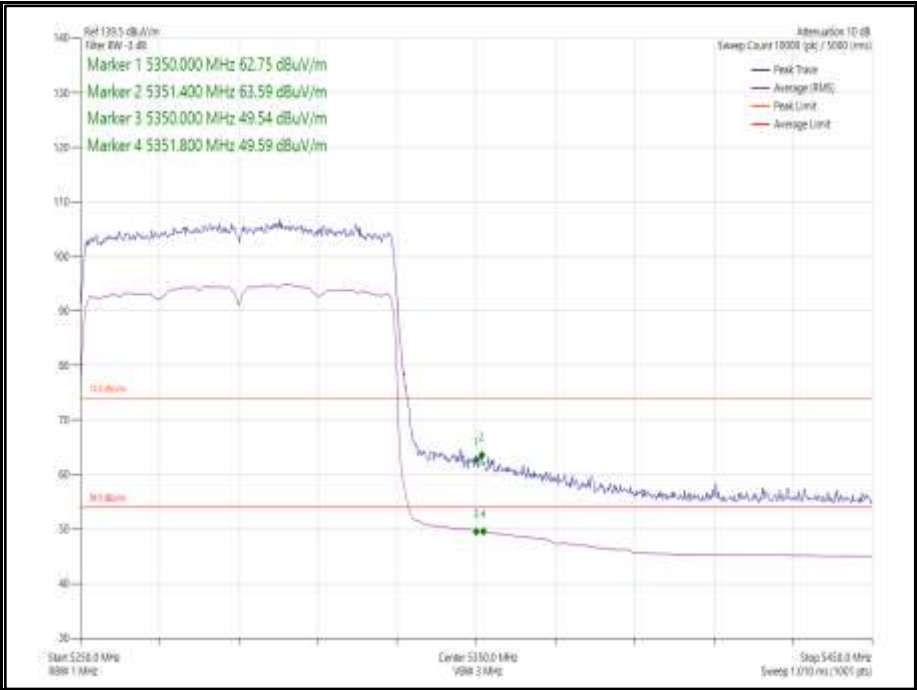


Figure 63 - 802.11ax HE80, Core 0, SU - 5290 MHz
Band Edge Frequency 5350 MHz

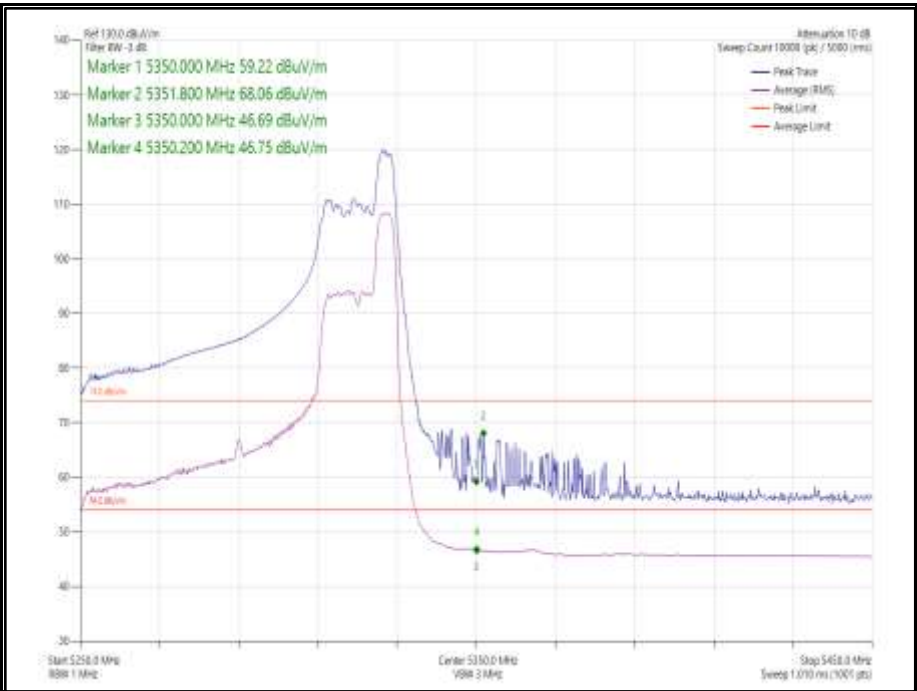


Figure 64 - 802.11ax HE80, Core 0, 52-52 - 5290 MHz
Band Edge Frequency 5350 MHz

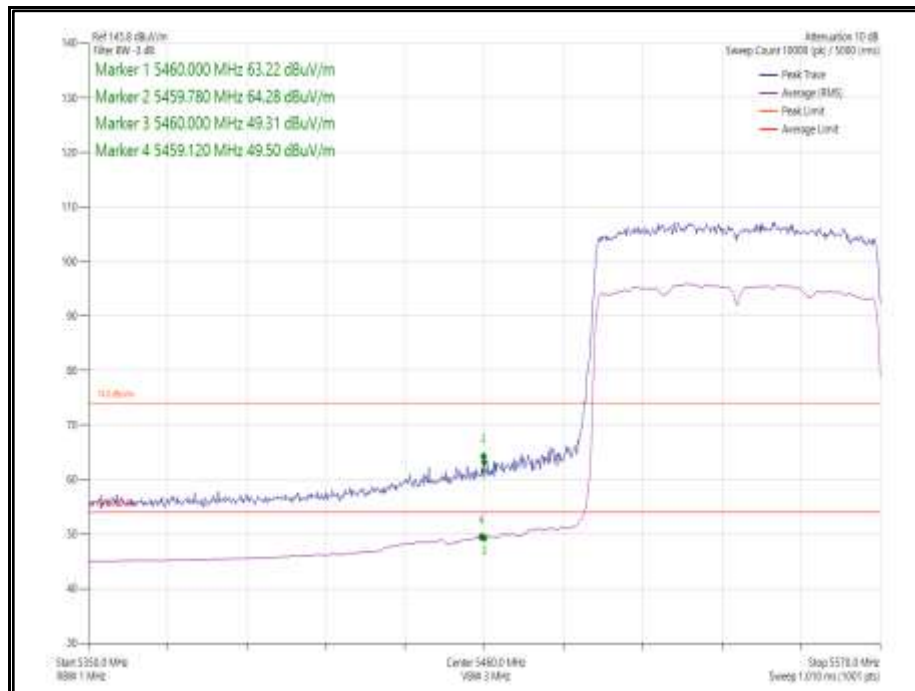


**Figure 65 - 802.11ax HE80, Core 0, SU - 5530 MHz
Band Edge Frequency 5490 MHz**

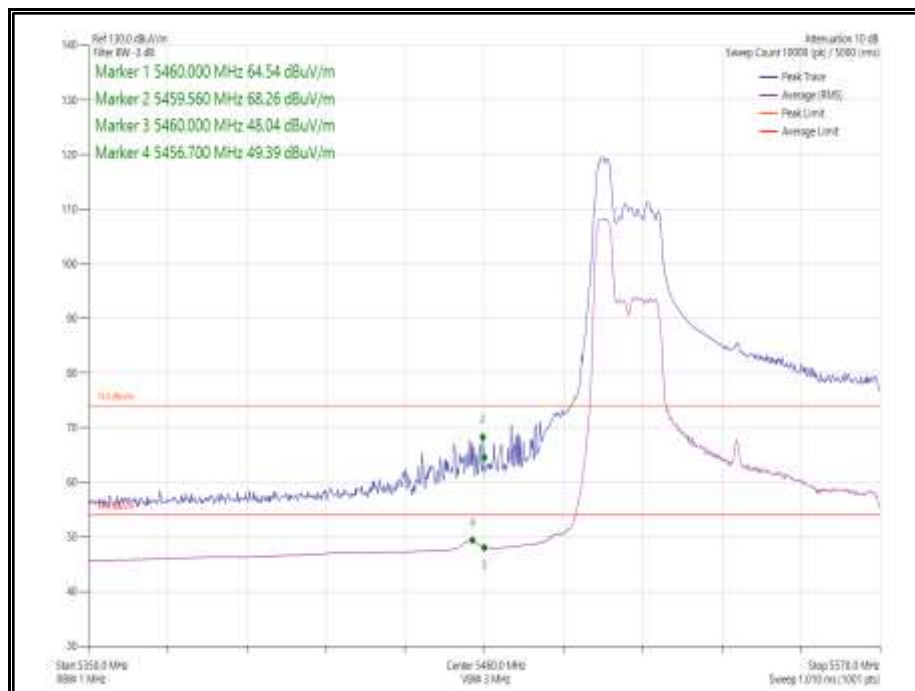


**Figure 66 - 802.11ax HE80, Core 0, 52-37 - 5530 MHz
Band Edge Frequency 5350 MHz**



Mode	Data Rate/ MCS	Resource Size	Resource Index	TX Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dBμV/m)	Average Level (dBμV/m)
802.11ac VHT80 CDD, Cores 0-1	MCS7x1	-	-	5210	5150	67.51	50.86
802.11ac VHT80 SDM, Cores 0-1	MCS7x1	-	-	5210	5150	65.86	50.84
802.11ax HE80 CDD, Cores 0-1	MCS11x1	SU	-	5210	5150	64.19	50.04
802.11ax HE80 CDD, Cores 0-1	MCS11x1	26	0	5210	5150	66.15	50.70
802.11ax HE80 SDM, Cores 0-1	MCS11x2	SU	-	5210	5150	68.49	50.28
802.11ax HE80 SDM, Cores 0-1	MCS11x2	26	0	5210	5150	66.97	50.94
802.11ac VHT80 CDD, Cores 0-1	MCS7x1	-	-	5290	5350	63.26	50.00
802.11ac VHT80 SDM, Cores 0-1	MCS2x2	-	-	5290	5350	62.42	50.40
802.11ax HE80 CDD, Cores 0-1	MCS11x1	SU	-	5290	5350	63.22	50.60
802.11ax HE80 CDD, Cores 0-1	MCS11x1	52	52	5290	5350	65.22	50.75
802.11ax HE80 SDM, Cores 0-1	MCS11x2	SU	-	5290	5350	63.71	50.43
802.11ax HE80 SDM, Cores 0-1	MCS11x2	52	52	5290	5350	63.66	50.91
802.11ac VHT80 CDD, Cores 0-1	MCS7x1	-	-	5530	5460	64.41	49.70
802.11ac VHT80 SDM, Cores 0-1	MCS7x1	-	-	5530	5460	64.39	50.63
802.11ax HE80 CDD, Cores 0-1	MCS11x1	SU	-	5530	5460	63.22	50.60
802.11ax HE80 CDD, Cores 0-1	MCS11x1	52	37	5530	5460	61.15	50.23
802.11ax HE80 SDM, Cores 0-1	MCS11x2	SU	-	5530	5460	63.71	50.43
802.11ax HE80 SDM, Cores 0-1	MCS11x2	52	37	5530	5460	62.88	50.42

Table 11 - 80 MHz Bandwidth 2TX MIMO Restricted Band Edge Results

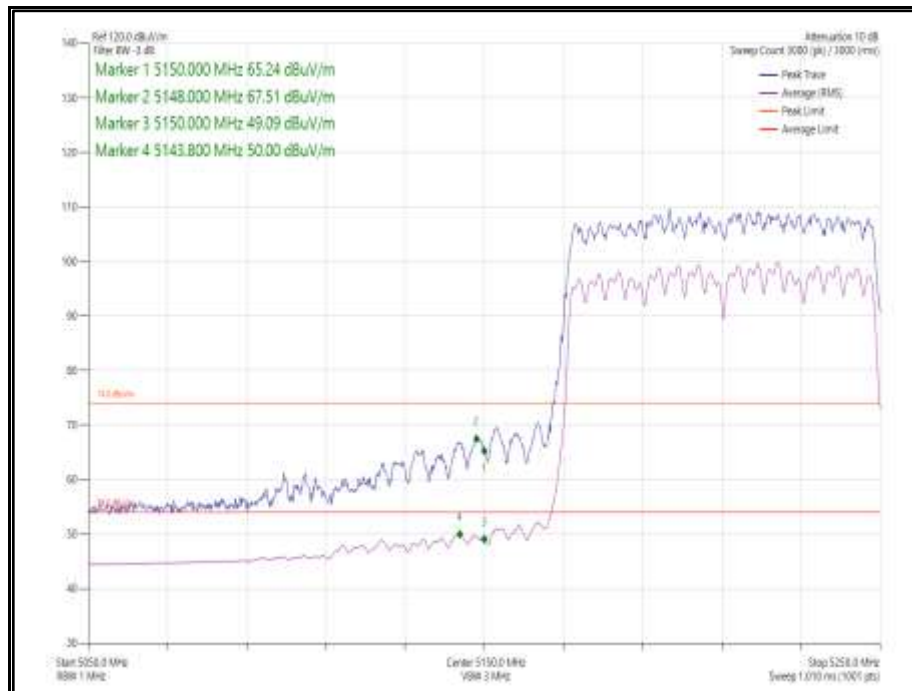


**Figure 67 - 802.11ac VHT80 CDD, Cores 0-1- 5210 MHz
Band Edge Frequency 5150 MHz**

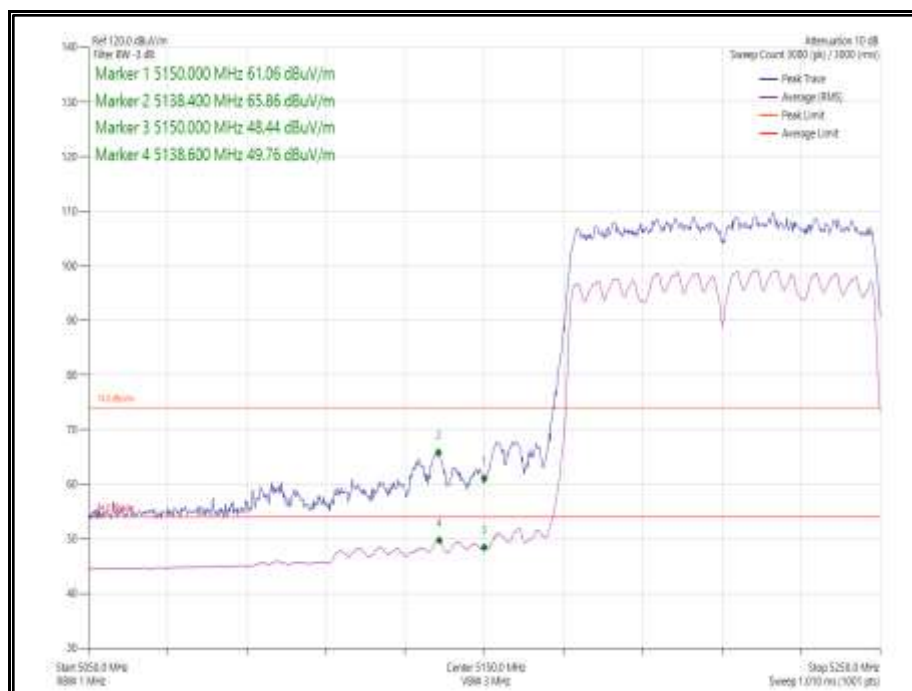


**Figure 68 - 802.11ac VHT80 SDM, Cores 0-1- 5210 MHz
Band Edge Frequency 5150 MHz**

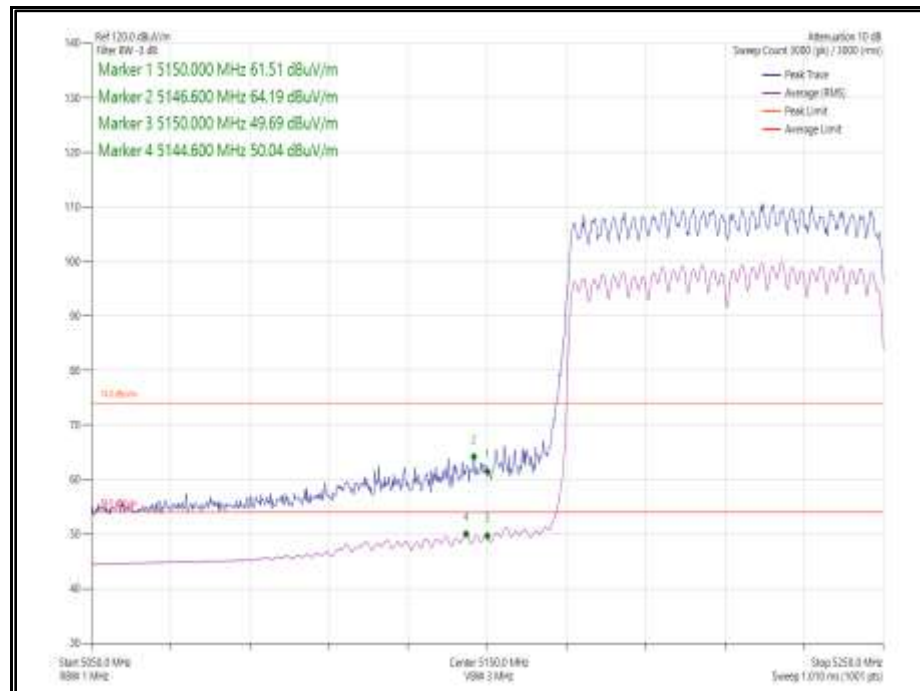


**Figure 69 - 802.11ax HE80 CDD, Cores 0-1, SU - 5210 MHz
Band Edge Frequency 5150 MHz**

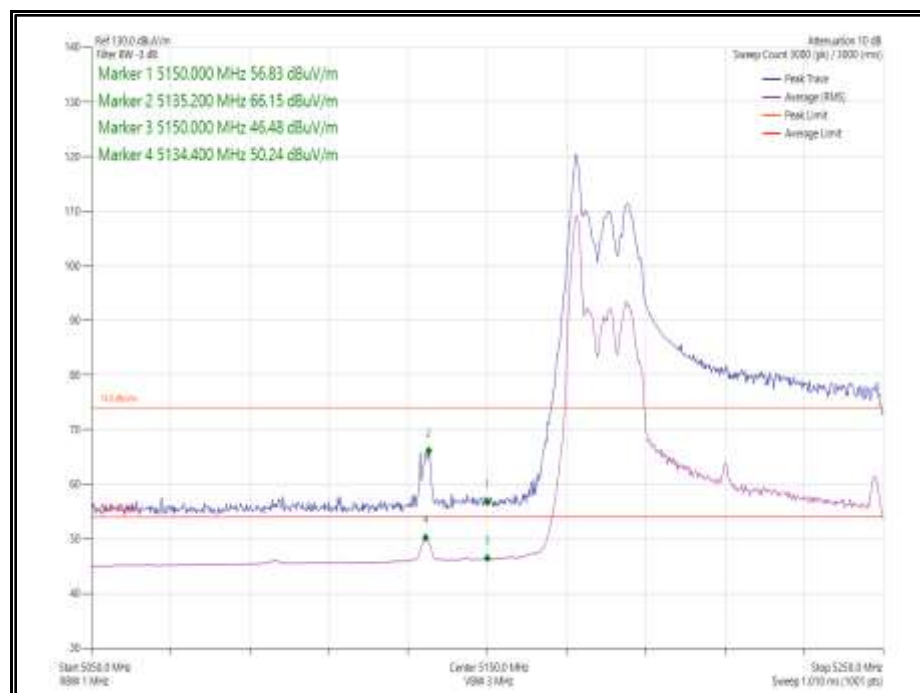


**Figure 70 - 802.11ax HE80 CDD, Cores 0-1, 26-0 - 5210 MHz
Band Edge Frequency 5150 MHz**

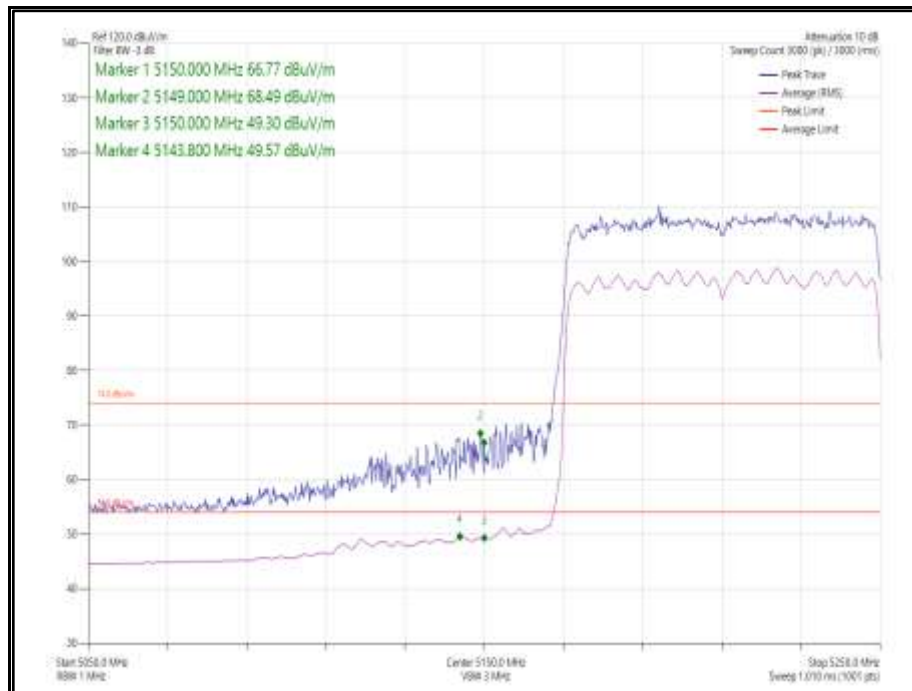


**Figure 71 - 802.11ax HE80 SDM, Cores 0-1, SU - 5210 MHz
Band Edge Frequency 5150 MHz**

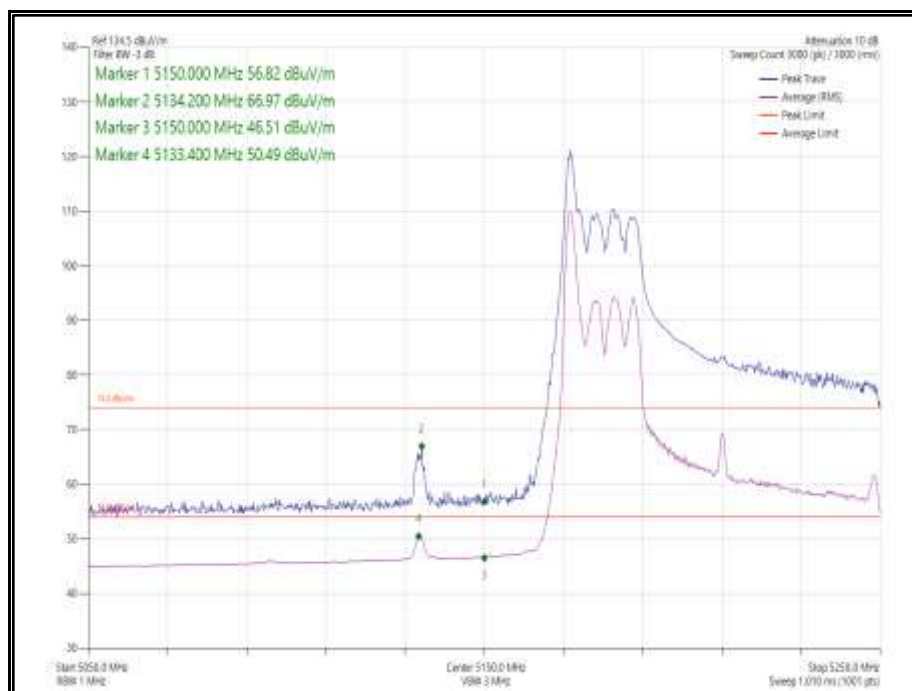


**Figure 72 - 802.11ax HE80 SDM, Cores 0-1, 26-0 - 5210 MHz
Band Edge Frequency 5150 MHz**

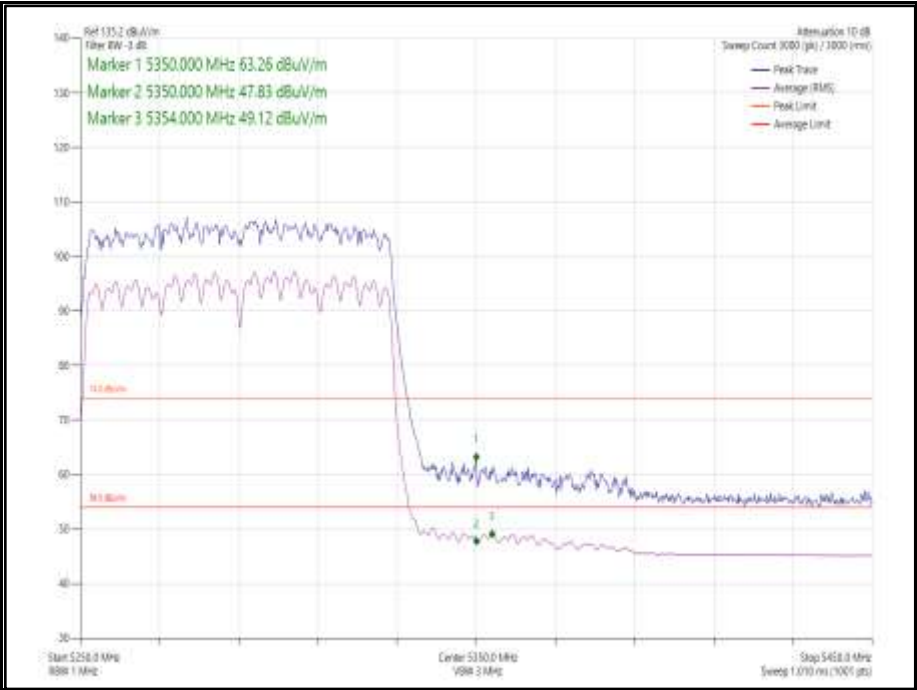


Figure 73 - 802.11ac VHT80 CDD, Cores 0-1- 5290 MHz
Band Edge Frequency 5350 MHz

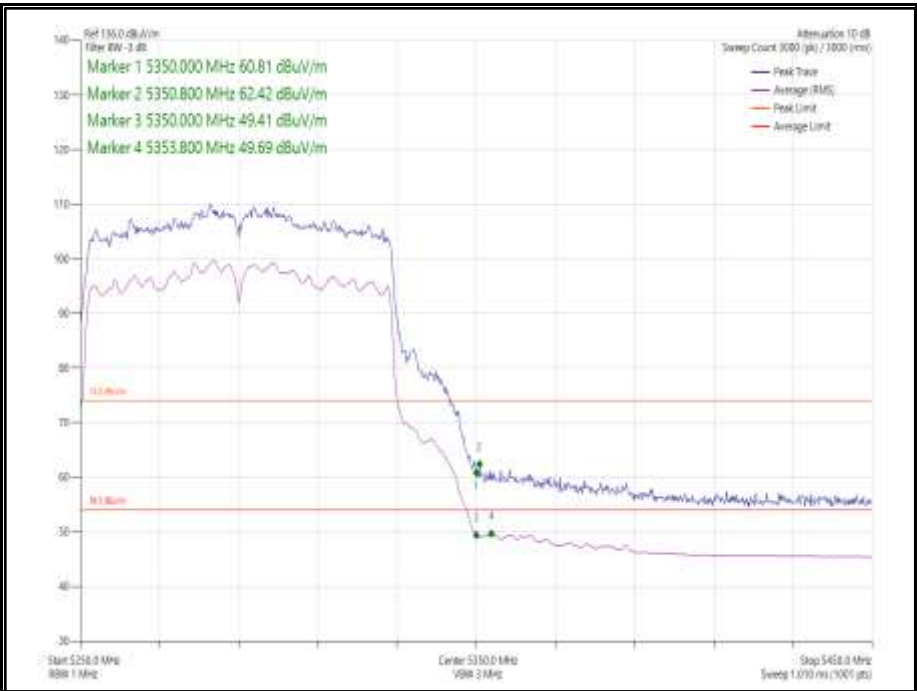


Figure 74 - 802.11ac VHT80 SDM, Cores 0-1- 5290 MHz
Band Edge Frequency 5350 MHz

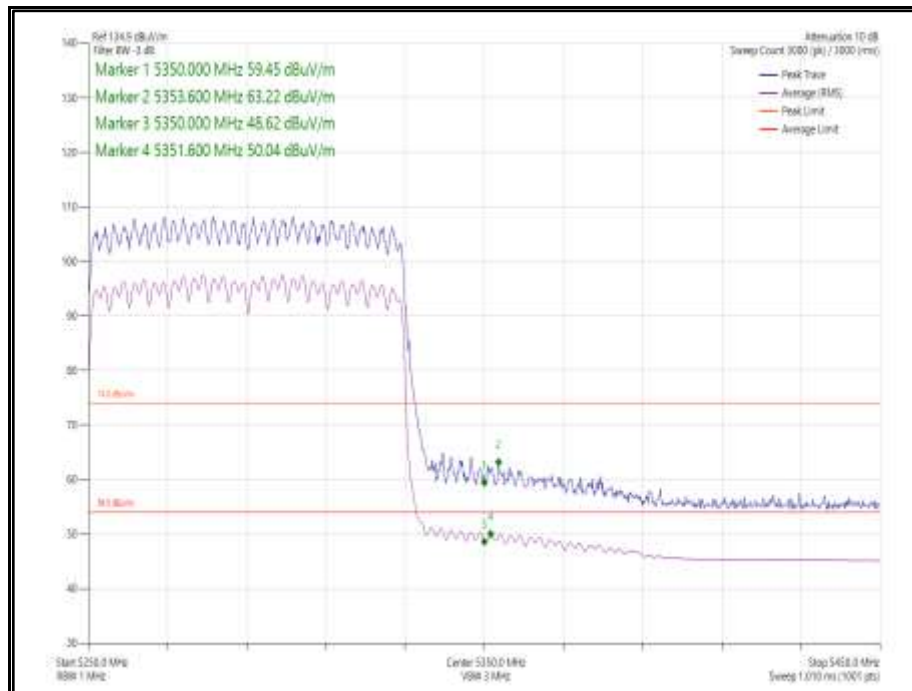


**Figure 75 - 802.11ax HE80 CDD, Cores 0-1, SU - 5290 MHz
Band Edge Frequency 5350 MHz**

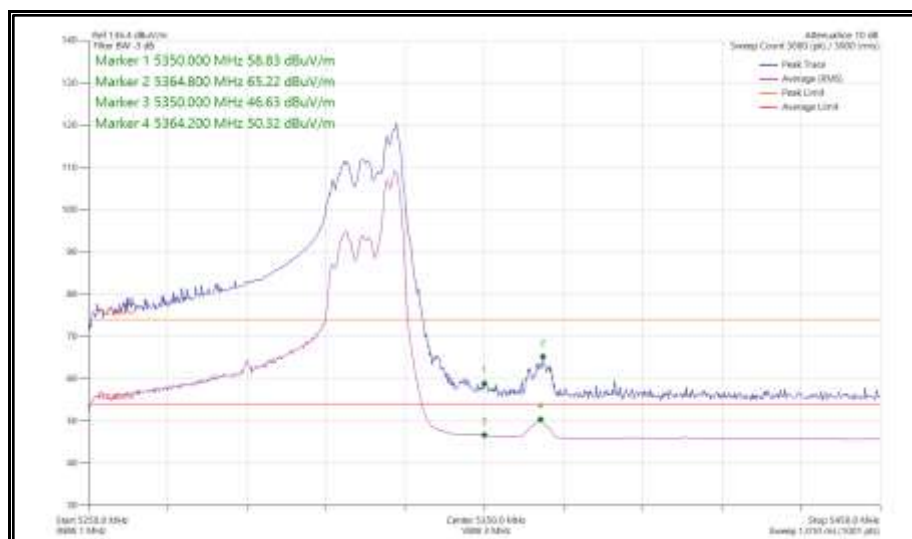


**Figure 76 - 802.11ax HE80 CDD, Cores 0-1, 52-52- 5290 MHz
Band Edge Frequency 5350 MHz**

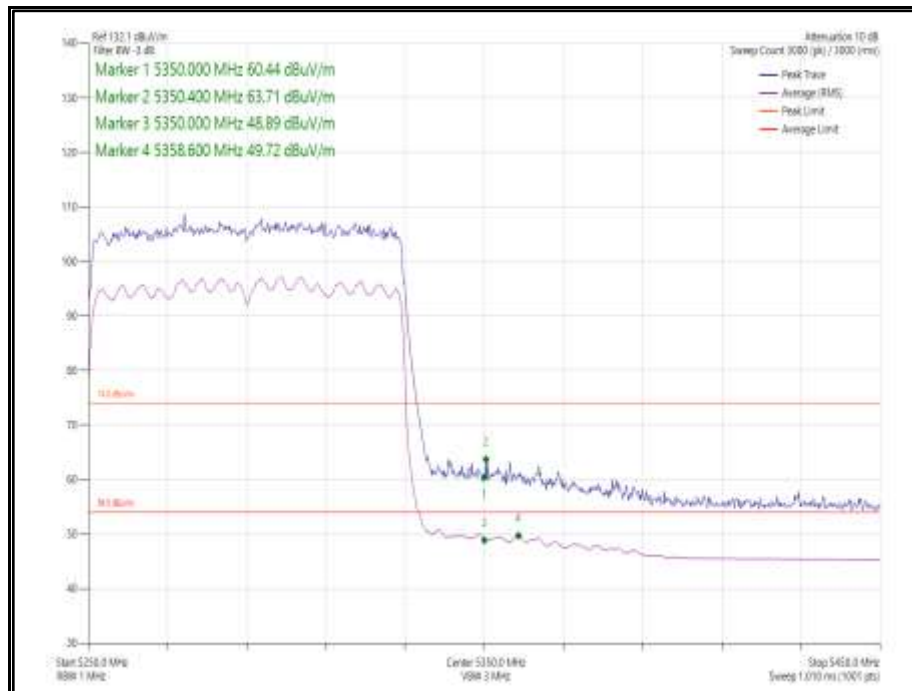


**Figure 77 - 802.11ax HE80 SDM, Cores 0-1, SU - 5290 MHz
Band Edge Frequency 5350 MHz**

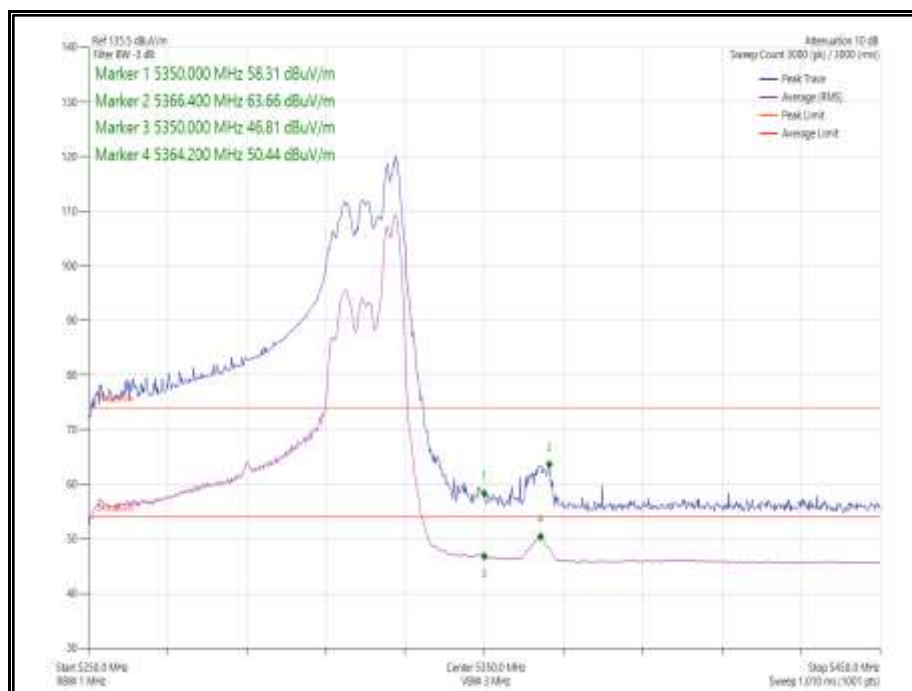


**Figure 78 - 802.11ax HE80 SDM, Cores 0-1, 52-52- 5290 MHz
Band Edge Frequency 5350 MHz**

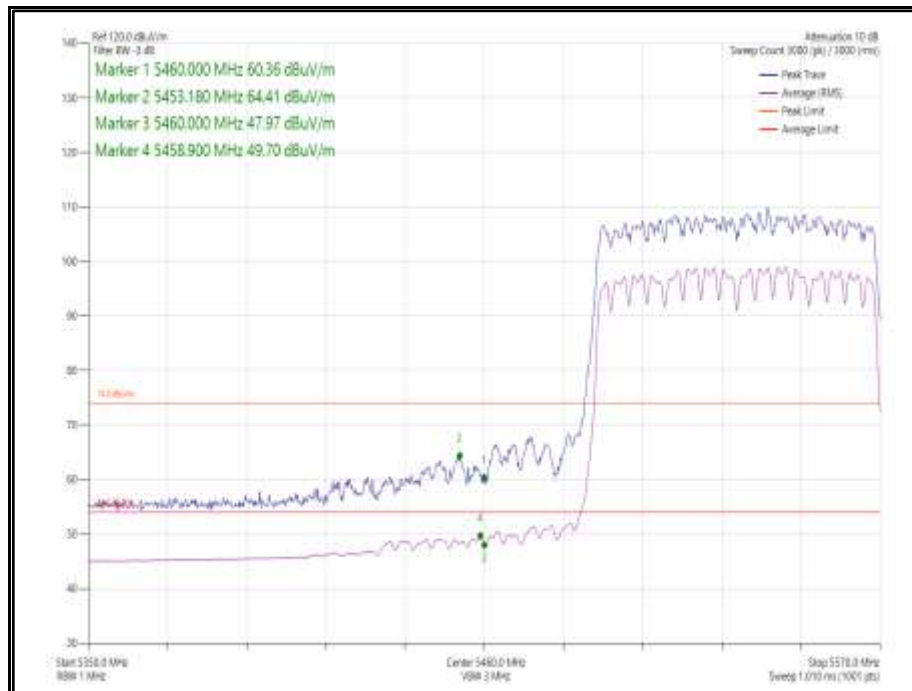


**Figure 79 - 802.11ac VHT80 CDD, Cores 0-1- 5530 MHz
Band Edge Frequency 5460 MHz**

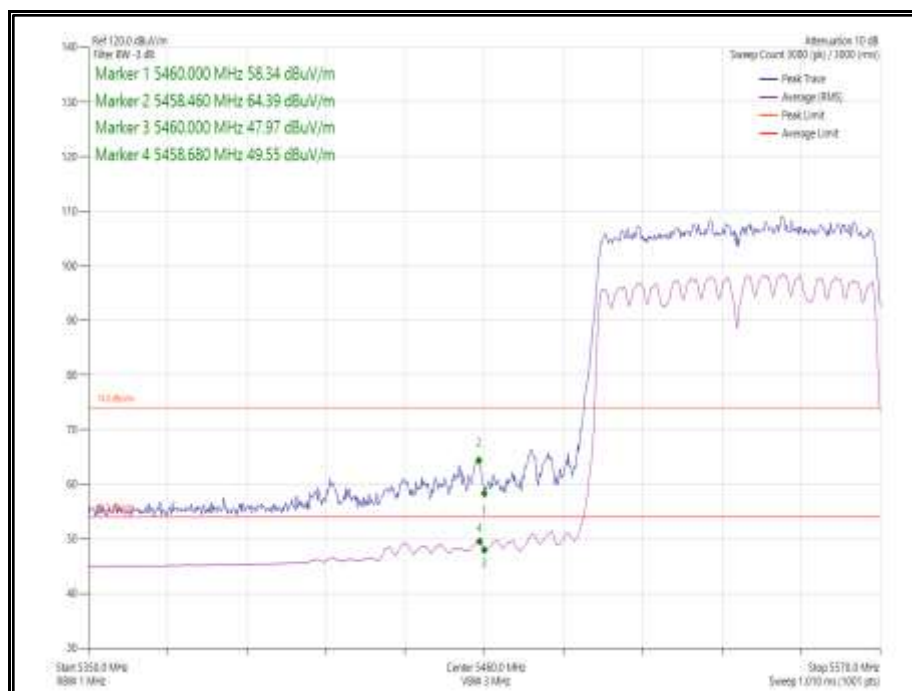


**Figure 80 - 802.11ac VHT80 SDM, Cores 0-1- 5530 MHz
Band Edge Frequency 5460 MHz**

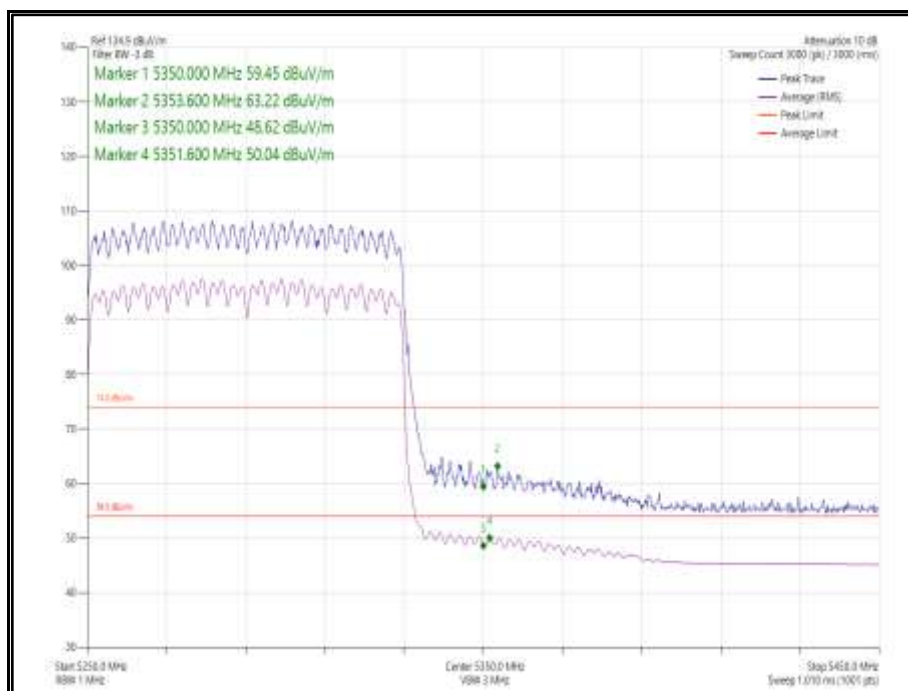


**Figure 81 - 802.11ax HE80 CDD, Cores 0-1, SU - 5530 MHz
Band Edge Frequency 5460 MHz**

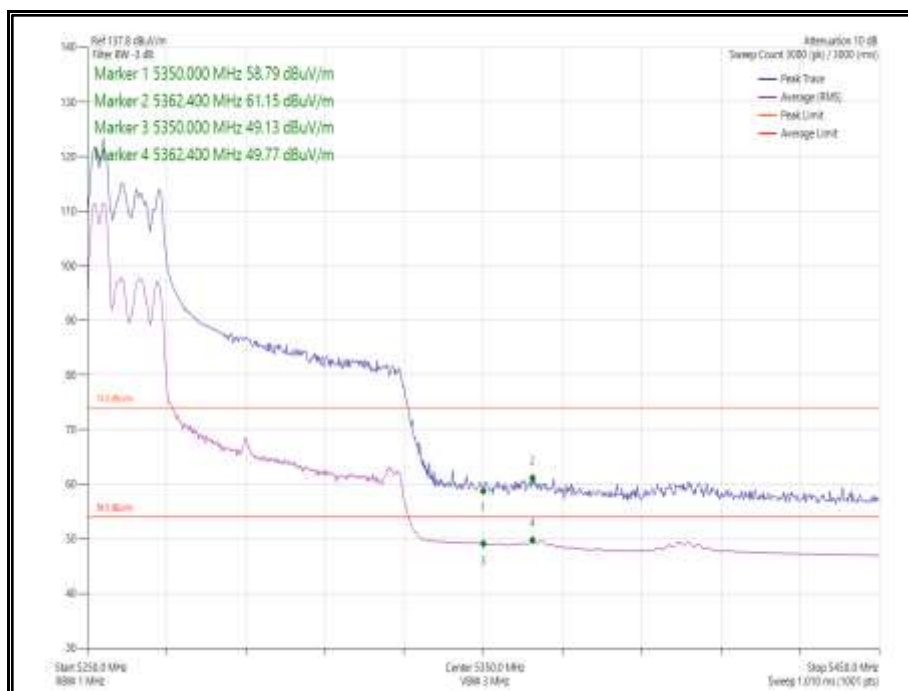


**Figure 82 - 802.11ax HE80 CDD, Cores 0-1, 52-37 - 5530 MHz
Band Edge Frequency 5460 MHz**

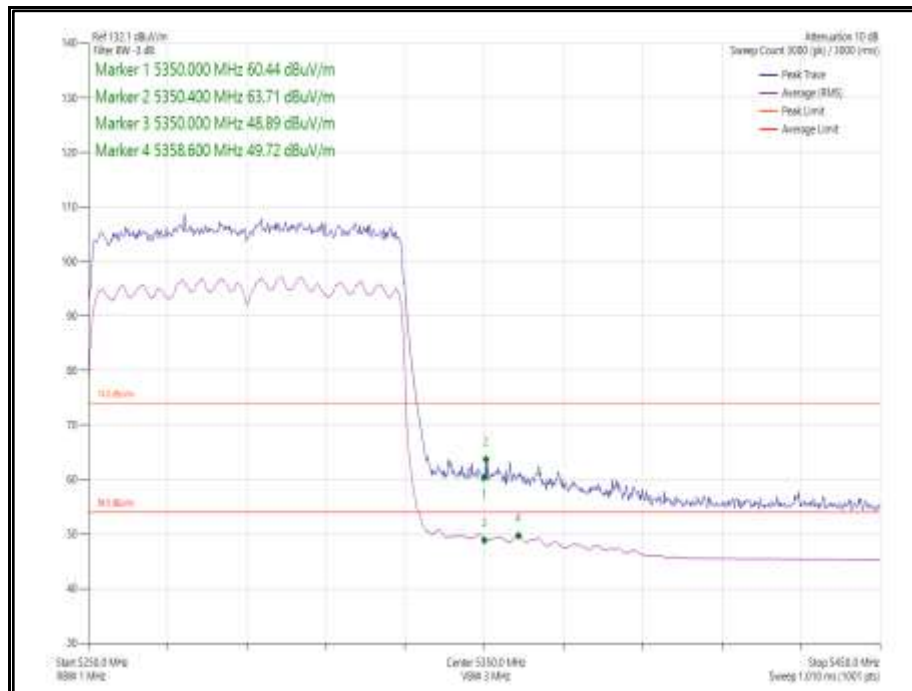


**Figure 83 - 802.11ax HE80 SDM, Cores 0-1, SU - 5530 MHz
Band Edge Frequency 5460 MHz**

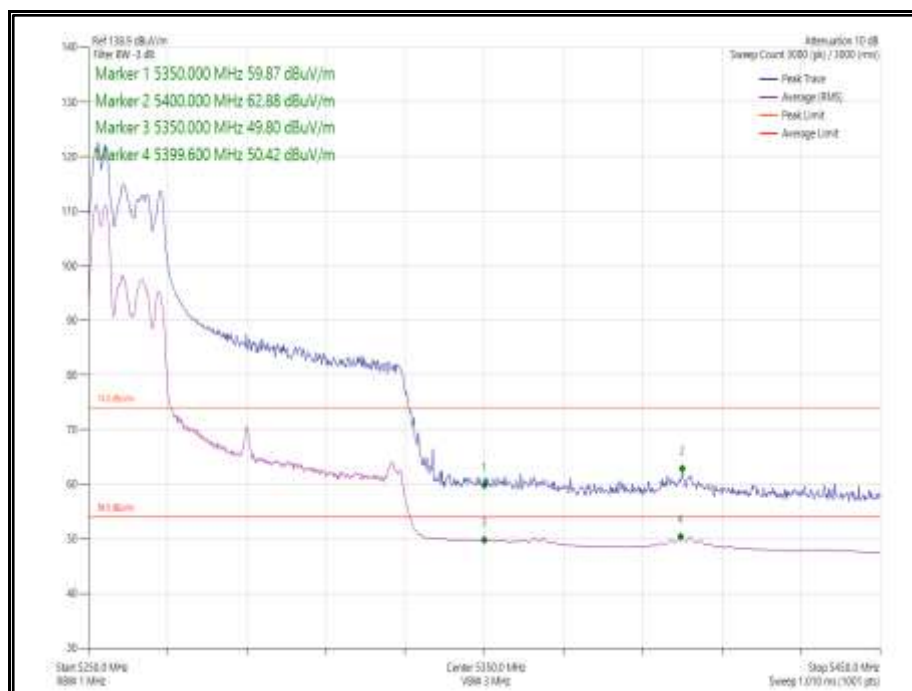


**Figure 84 - 802.11ax HE80 SDM, Cores 0-1, 52-37 - 5530 MHz
Band Edge Frequency 5460 MHz**



FCC 47 CFR Part 15, Limit Clause 15.205 and ISED RSS-GEN Limit Clause 8.10

	Peak (dBμV/m)	Average (dBμV/m)
Restricted Bands of Operation	74	54

Table 12 - Restricted Band Edge Limit Table

2.1.7 Test Location and Test Equipment Used

This test was carried out in RF Chamber 11.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Expires
EMI Test Receiver	Rohde & Schwarz	ESW44	5084	12	08-Mar-2022
Cable (18 GHz)	Rosenberger	LU7-071-2000	5107	12	09-Jul-2022
EmX Emissions Software	TUV SUD	V2.1.11	5125	-	Software
Screened Room (11)	Rainford	Rainford	5136	36	01-Nov-2021
Mast and Turntable Controller	Maturo	Maturo NCD	5159	-	TU
Turntable	Maturo	TT 15WF	5160	-	TU
Horn Antenna (1-10GHz)	Schwarzbeck	BBHA 9120 B	5215	12	01-Apr-2022
8m N Type Cable	Junkosha	MWX221-08000NMSNMS/B	5522	12	24-Mar-2022
Thermo-Hygro-Barometer	PCE Instruments	PCE-THB 40	5604	12	08-Sep-2021
Preamp 1 - 26.5 GHz	Agilent Technologies	8449B	5445	12	06-May-2022
Attenuator 5W 10dB DC-18GHz	Aaren	AT40A-4041-D18-10	5492	12	14-Apr-2022

Table 13

TU - Traceability Unscheduled



2.2 Maximum Conducted Output Power

2.2.1 Specification Reference

FCC 47 CFR Part 15E, Clause 15.407 (a)
ISED RSS-247, Clause 6.2

2.2.2 Equipment Under Test and Modification State

A2442, S/N: V3WLVWCFN6 - Modification State 0
A2442, S/N: MJ2Y719JTQ – Modification State 0

2.2.3 Date of Test

20-August-2021 to 20-September-2021

2.2.4 Test Method

The test was performed in accordance with ANSI C63.10, clause 12.4.3.2 using method PM-G. Since the gated power meter was used for method PM-G, the EUT was measured only while transmitting and hence no duty cycle correction was necessary.

MIMO output port summing was performed in accordance with KDB 662911 D01.

For the CDD results the directional gain was calculated in accordance with clause F)2)f)(ii) using the calculations from F)2)f)(i) with worst-case individual gain and an array gain of zero.

For SDM modes directional gain was calculated in accordance with clause F)2)d)(ii).

For transmit beamforming (TxBF) mode it was calculated in accordance with clause F)2)d)(i).

The 'straddle' channels which operate across the U-NII 2C and U-NII 3 boundaries are reported as the power in each band compared to their respective limits in accordance with ANSI C63.10, clauses 12.3.1 and 12.3.2.

2.2.5 Environmental Conditions

Ambient Temperature	21.4 - 23.0 °C
Relative Humidity	48.9 – 61.7 %



2.2.6 Test Results

5 GHz WLAN

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a	Duty Cycle (%):	97.6
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.50
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5180	-	18.84	-	-	-	-	23.50	-4.66
5200	-	19.07	-	-	-	-	23.50	-4.43
5240	-	19.00	-	-	-	-	23.50	-4.50

Table 14 - FCC Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a	Duty Cycle (%):	97.8
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.50
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ			
5180	16.620	12.18	-	-	-	-	18.68	22.21	-3.52
5200	16.620	11.96	-	-	-	-	18.46	22.21	-3.75
5240	16.560	12.09	-	-	-	-	18.59	22.19	-3.60

Table 15 - ISED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	96.6
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.50
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5180	-	19.00	-	-	-	-	23.50	-4.50
5200	-	18.93	-	-	-	-	23.50	-4.57
5240	-	19.08	-	-	-	-	23.50	-4.42

Table 16 - FCC Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	96.9
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.50
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ			
5180	17.760	12.13	-	-	-	-	18.63	22.49	-3.86
5200	17.640	11.86	-	-	-	-	18.36	22.46	-4.11
5240	17.640	11.98	-	-	-	-	18.48	22.46	-3.99

Table 17 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)f(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	97.0
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	6.50
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5180	-	13.20	13.12	-	-	16.17	23.50	-7.33
5200	-	13.20	12.93	-	-	16.07	23.50	-7.43
5240	-	13.31	13.43	-	-	16.38	23.50	-7.12

Table 18 - FCC Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)f(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	96.9
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	6.50
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ			
5180	17.820	6.26	6.29	-	-	9.28	15.78	22.51	-6.73
5200	17.700	6.24	5.71	-	-	8.99	15.49	22.48	-6.99
5240	17.700	6.41	6.41	-	-	9.42	15.92	22.48	-6.56

Table 19 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	94.2
Modulation Coding Scheme:	MCS10	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.16
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5180	-	16.30	16.25	-	-	19.27	23.84	-4.57
5200	-	16.34	16.38	-	-	19.36	23.84	-4.48
5240	-	15.97	16.38	-	-	19.17	23.84	-4.67

Table 20 - FCC Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	94.4
Modulation Coding Scheme:	MCS10	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.16
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ			
5180	17.760	9.44	9.41	-	-	12.43	18.59	22.49	-3.90
5200	17.700	9.07	8.98	-	-	12.03	18.19	22.48	-4.29
5240	17.700	9.17	9.24	-	-	12.21	18.37	22.48	-4.11

Table 21 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	94.0
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.50
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5190	-	17.32	-	-	-	-	23.50	-6.18
5230	-	20.71	-	-	-	-	23.50	-2.79

Table 22 - FCC Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	94.0
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.50
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ			
5190	36.600	14.66	-	-	-	-	21.16	23.00	-1.84
5230	36.300	14.49	-	-	-	-	20.99	23.00	-2.01

Table 23 - ISED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)f)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	94.0
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	6.50
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5190	-	15.98	15.70	-	-	18.84	23.50	-4.66
5230	-	15.69	15.78	-	-	18.74	23.50	-4.76

Table 24 - FCC Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)f)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	93.9
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	6.50
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ			
5190	36.480	8.66	8.45	-	-	11.57	18.07	23.00	-4.93
5230	36.300	8.82	8.74	-	-	11.79	18.29	23.00	-4.71

Table 25 - ISED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	90.1
Modulation Coding Scheme:	MCS10	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.16
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5190	-	17.05	17.22	-	-	20.12	23.84	-3.72
5230	-	18.78	18.85	-	-	21.80	23.84	-2.04

Table 26 - FCC Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	90.1
Modulation Coding Scheme:	MCS10	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.16
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ			
5190	36.600	11.63	11.66	-	-	14.64	20.80	23.00	-2.20
5230	36.240	11.70	11.90	-	-	14.65	20.81	23.00	-2.19

Table 27 - ISED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	89.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.50
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5210	-	15.73	-	-	-	-	23.50	-7.77

Table 28 - FCC Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	89.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.50
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ			
5210	75.680	15.19	-	-	-	-	21.69	23.00	-1.31

Table 29 - ISED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)f(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	89.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	6.50
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5210	-	15.24	15.28	-	-	18.27	23.50	-5.23

Table 30 - FCC Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)f(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	88.9
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	6.50
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ			
5210	75.680	9.45	9.43	-	-	12.44	18.94	23.00	-4.06

Table 31 - ISD Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	84.0
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.16
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5210	-	15.01	15.19	-	-	18.10	23.84	-5.74

Table 32 - FCC Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	84.0
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.16
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ			
5210	75.460	12.44	12.30	-	-	15.36	21.52	23.00	-1.48

Table 33 - ISD Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	95.9
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.50
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5180	-	18.53	-	-	-	-	23.50	-4.97
5200	-	18.69	-	-	-	-	23.50	-4.81
5240	-	18.87	-	-	-	-	23.50	-4.63

Table 34 - FCC Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	95.9
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.50
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ			
5180	19.140	11.95	-	-	-	-	18.45	22.82	-4.37
5200	19.080	11.78	-	-	-	-	18.28	22.81	-4.53
5240	19.080	11.67	-	-	-	-	18.17	22.81	-4.64

Table 35 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)f(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	95.9
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	6.50
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5180	-	13.05	13.00	-	-	16.03	23.50	-7.47
5200	-	12.83	13.13	-	-	15.99	23.50	-7.51
5240	-	12.61	12.93	-	-	15.78	23.50	-7.72

Table 36 - FCC Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)f(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	95.8
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	6.50
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ			
5180	19.080	6.19	5.91	-	-	9.06	15.56	22.81	-7.24
5200	18.960	5.94	5.88	-	-	8.92	15.42	22.78	-7.36
5240	19.020	5.60	5.91	-	-	8.76	15.26	22.79	-7.53

Table 37 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	95.8
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.16
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5180	-	16.16	15.97	-	-	19.07	23.84	-4.77
5200	-	15.92	15.73	-	-	18.83	23.84	-5.00
5240	-	15.87	16.04	-	-	18.96	23.84	-4.88

Table 38 - FCC Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	95.9
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.16
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ			
5180	19.140	9.22	9.09	-	-	12.16	18.33	22.82	-4.49
5200	19.020	8.88	8.95	-	-	11.92	18.09	22.79	-4.71
5240	19.020	9.00	8.97	-	-	12.00	18.16	22.79	-4.63

Table 39 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 RU26	Duty Cycle (%):	97.3
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.50
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5180 (RU26.0)	-	10.91	-	-	-	-	23.50	-12.59
5200 (RU26.0)	-	10.78	-	-	-	-	23.50	-12.72
5240 (RU26.8)	-	10.71	-	-	-	-	23.50	-12.79

Table 40 - FCC Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 RU26	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.50
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ			
5180 (RU26.0)	18.420	3.85	-	-	-	-	10.35	22.65	-12.30
5200 (RU26.0)	18.420	3.97	-	-	-	-	10.47	22.65	-12.19
5240 (RU26.8)	18.600	3.87	-	-	-	-	10.37	22.70	-12.33

Table 41 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)f(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE20 RU26	Duty Cycle (%):	97.6
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	6.50
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5180 (RU26.0)	-	5.00	4.72	-	-	7.88	23.50	-15.62
5200 (RU26.0)	-	5.21	5.03	-	-	8.12	23.50	-15.38
5240 (RU26.8)	-	4.88	4.97	-	-	7.93	23.50	-15.57

Table 42 - FCC Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)f(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE20 RU26	Duty Cycle (%):	97.6
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	6.50
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ			
5180 (RU26.0)	18.300	-2.21	-2.29	-	-	0.75	7.25	22.62	-15.37
5200 (RU26.0)	18.360	-2.10	-2.18	-	-	0.87	7.37	22.64	-15.27
5240 (RU26.8)	18.360	-1.97	-1.85	-	-	1.09	7.59	22.64	-15.05

Table 43 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE20 RU26	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.16
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5180 (RU26.0)	-	8.08	8.06	-	-	11.07	23.84	-12.77
5200 (RU26.0)	-	8.10	8.19	-	-	11.14	23.84	-12.69
5240 (RU26.8)	-	8.21	8.07	-	-	11.15	23.84	-12.69

Table 44 - FCC Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE20 RU26	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.16
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ			
5180 (RU26.0)	18.300	0.97	0.94	-	-	3.96	10.12	22.62	-12.50
5200 (RU26.0)	18.300	1.07	1.06	-	-	3.95	10.12	22.62	-12.51
5240 (RU26.8)	18.360	0.89	1.08	-	-	3.98	10.14	22.64	-12.50

Table 45 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	97.2
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.50
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5180 (RU52.37)	-	13.59	-	-	-	-	23.50	-9.91
5200 (RU52.37)	-	13.68	-	-	-	-	23.50	-9.82
5240 (RU52.40)	-	13.89	-	-	-	-	23.50	-9.61

Table 46 - FCC Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	97.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.50
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ			
5180 (RU52.37)	18.240	6.79	-	-	-	-	13.29	22.61	-9.32
5200 (RU52.37)	18.240	6.70	-	-	-	-	13.20	22.61	-9.41
5240 (RU52.40)	18.480	6.84	-	-	-	-	13.34	22.67	-9.32

Table 47 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)f(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	97.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	6.50
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5180 (RU52.37)	-	8.02	8.16	-	-	11.10	23.50	-12.40
5200 (RU52.37)	-	7.99	7.64	-	-	10.83	23.50	-12.67
5240 (RU52.40)	-	7.88	7.95	-	-	10.92	23.50	-12.58

Table 48 - FCC Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)f(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	97.3
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	6.50
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ			
5180 (RU52.37)	18.180	0.90	0.89	-	-	3.90	10.40	22.60	-12.19
5200 (RU52.37)	18.240	1.14	1.11	-	-	4.12	10.62	22.61	-11.99
5240 (RU52.40)	18.180	0.96	1.21	-	-	4.09	10.59	22.60	-12.01

Table 49 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	97.3
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.16
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5180 (RU52.37)	-	10.90	10.80	-	-	13.86	23.84	-9.97
5200 (RU52.37)	-	11.01	11.18	-	-	14.10	23.84	-9.74
5240 (RU52.40)	-	10.89	10.98	-	-	13.94	23.84	-9.89

Table 50 - FCC Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	97.5
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.16
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ			
5180 (RU52.37)	18.180	4.07	4.09	-	-	7.07	13.23	22.60	-9.36
5200 (RU52.37)	18.180	3.95	4.02	-	-	7.00	13.16	22.60	-9.44
5240 (RU52.40)	18.180	3.84	3.92	-	-	6.89	13.05	22.60	-9.54

Table 51 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	97.8
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.50
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5180 (RU106.53)	-	16.89	-	-	-	-	23.50	-6.61
5200 (RU106.53)	-	16.77	-	-	-	-	23.50	-6.73
5240 (RU106.54)	-	16.69	-	-	-	-	23.50	-6.81

Table 52 - FCC Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	98.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.50
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ			
5180 (RU106.53)	18.180	9.51	-	-	-	-	16.01	22.60	-6.58
5200 (RU106.53)	18.240	9.65	-	-	-	-	16.15	22.61	-6.46
5240 (RU106.54)	18.480	9.79	-	-	-	-	16.29	22.67	-6.38

Table 53 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)f(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	98.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	6.50
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5180 (RU106.53)	-	10.99	10.91	-	-	13.95	23.50	-9.55
5200 (RU106.53)	-	10.86	11.04	-	-	13.96	23.50	-9.54
5240 (RU106.54)	-	11.03	11.09	-	-	14.06	23.50	-9.44

Table 54 - FCC Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)f(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	97.9
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	6.50
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ			
5180 (RU106.53)	18.120	4.21	4.24	-	-	7.22	13.72	22.58	-8.86
5200 (RU106.53)	18.120	4.09	4.18	-	-	7.15	13.65	22.58	-8.93
5240 (RU106.54)	18.300	4.00	4.08	-	-	7.05	13.55	22.62	-9.07

Table 55 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	97.9
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.16
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5180 (RU106.53)	-	14.03	14.05	-	-	17.05	23.84	-6.78
5200 (RU106.53)	-	13.94	13.69	-	-	16.82	23.84	-7.01
5240 (RU106.54)	-	14.08	13.74	-	-	16.92	23.84	-6.91

Table 56 - FCC Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	98.1
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.16
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ			
5180 (RU106.53)	18.120	6.92	6.79	-	-	9.87	16.03	22.58	-6.55
5200 (RU106.53)	18.120	6.78	6.91	-	-	9.86	16.02	22.58	-6.56
5240 (RU106.54)	18.180	7.12	7.14	-	-	10.14	16.30	22.60	-6.30

Table 57 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	93.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.50
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5190	-	17.77	-	-	-	-	23.50	-5.73
5230	-	20.28	-	-	-	-	23.50	-3.22

Table 58 - FCC Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	93.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.50
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ			
5190	38.160	14.67	-	-	-	-	21.17	23.00	-1.83
5230	37.920	14.58	-	-	-	-	21.08	23.00	-1.92

Table 59 - ISED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)f(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	93.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	6.50
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5190	-	15.69	15.37	-	-	18.54	23.50	-4.96
5230	-	15.69	15.44	-	-	18.58	23.50	-4.92

Table 60 - FCC Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)f(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	93.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	6.50
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ			
5190	38.160	8.83	8.91	-	-	11.88	18.38	23.00	-4.62
5230	37.920	8.71	8.82	-	-	11.78	18.28	23.00	-4.72

Table 61 - ISED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	93.1
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.16
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5190	-	16.15	16.16	-	-	19.15	23.84	-4.68
5230	-	18.46	18.24	-	-	21.36	23.84	-2.48

Table 62 - FCC Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	93.1
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.16
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ			
5190	38.160	11.63	11.76	-	-	14.70	20.87	23.00	-2.13
5230	37.920	11.60	11.69	-	-	14.65	20.81	23.00	-2.19

Table 63 - ISED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	88.5
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.50
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5210	-	15.65	-	-	-	-	23.50	-7.85

Table 64 - FCC Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	88.5
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.50
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ			
5210	77.440	15.35	-	-	-	-	21.85	23.00	-1.15

Table 65 - ISED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)f(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	88.5
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	6.50
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5210	-	14.67	14.87	-	-	17.78	23.50	-5.72

Table 66 - FCC Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)f(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	88.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	6.50
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ			
5210	77.220	9.43	9.37	-	-	12.41	18.91	23.00	-4.09

Table 67 - ISD Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	88.5
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.16
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5210	-	14.95	14.83	-	-	17.90	23.84	-5.94

Table 68 - FCC Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	88.5
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.16
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ			
5210	77.440	12.40	12.25	-	-	15.33	21.50	23.00	-1.50

Table 69 - ISD Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a	Duty Cycle (%):	97.6
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	7.90
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5260	20.820	17.54	-	-	-	-	22.10	-4.56
5280	20.820	17.50	-	-	-	-	22.10	-4.60
5320	21.420	17.66	-	-	-	-	22.10	-4.44

Table 70 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ					
5260	16.500	17.54	-	-	-	-	23.17	-5.64	25.44	29.17	-3.74
5280	16.560	17.50	-	-	-	-	23.19	-5.69	25.40	29.19	-3.79
5320	16.620	17.66	-	-	-	-	23.21	-5.55	25.56	29.21	-3.65

Table 71 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	96.6
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	7.90
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5260	20.880	17.56	-	-	-	-	22.10	-4.54
5280	21.000	17.43	-	-	-	-	22.10	-4.67
5320	22.260	17.43	-	-	-	-	22.10	-4.67

Table 72 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ					
5260	17.700	17.56	-	-	-	-	23.48	-5.92	25.46	29.48	-4.02
5280	17.700	17.43	-	-	-	-	23.48	-6.05	25.33	29.48	-4.15
5320	17.820	17.43	-	-	-	-	23.51	-6.08	25.33	29.51	-4.18

Table 73 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)f(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	96.9
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	7.90
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5260	21.000	12.73	13.00	-	-	15.87	22.10	-6.23
5280	21.000	12.92	12.88	-	-	15.90	22.10	-6.20
5320	21.600	12.89	12.99	-	-	15.94	22.10	-6.16

Table 74 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ					
5260	17.700	12.73	13.00	-	-	15.87	23.48	-7.61	23.77	29.48	-5.71
5280	17.640	12.92	12.88	-	-	15.90	23.46	-7.56	23.80	29.46	-5.66
5320	17.760	12.89	12.99	-	-	15.94	23.49	-7.55	23.84	29.49	-5.65

Table 75 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	94.5
Modulation Coding Scheme:	MCS10	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.65
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5260	20.880	15.82	15.72	-	-	18.77	23.35	-4.58
5280	20.880	15.74	15.71	-	-	18.72	23.35	-4.63
5320	21.660	15.95	15.95	-	-	18.96	23.35	-4.39

Table 76 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ					
5260	17.700	15.82	15.72	-	-	18.77	23.48	-4.71	25.42	29.48	-4.06
5280	17.640	15.74	15.71	-	-	18.72	23.46	-4.75	25.37	29.46	-4.09
5320	17.760	15.95	15.95	-	-	18.96	23.49	-4.54	25.61	29.49	-3.88

Table 77 - ISED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	94.0
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	7.90
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5270	41.640	20.06	-	-	-	-	22.10	-2.04
5310	42.480	14.76	-	-	-	-	22.10	-7.34

Table 78 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ					
5270	36.480	20.06	-	-	-	-	24.00	-3.94	27.96	30.00	-2.04
5310	36.480	14.76	-	-	-	-	24.00	-9.24	22.66	30.00	-7.34

Table 79 - ISED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)f(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	94.0
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	7.90
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5270	41.280	15.50	15.30	-	-	18.41	22.10	-3.69
5310	42.960	14.82	14.93	-	-	17.89	22.10	-4.21

Table 80 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ					
5270	36.360	15.50	15.30	-	-	18.41	24.00	-5.59	26.31	30.00	-3.69
5310	36.480	14.82	14.93	-	-	17.89	24.00	-6.11	25.79	30.00	-4.21

Table 81 - ISED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	90.1
Modulation Coding Scheme:	MCS10	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.65
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5270	41.400	18.44	18.06	-	-	21.24	23.35	-2.11
5310	42.720	14.82	14.90	-	-	17.86	23.35	-5.49

Table 82 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ					
5270	36.360	18.44	18.06	-	-	21.24	24.00	-2.76	27.89	30.00	-2.11
5310	36.480	14.82	14.90	-	-	17.86	24.00	-6.14	24.51	30.00	-5.49

Table 83 - ISED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	89.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	7.90
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5290	83.820	13.47	-	-	-	-	22.10	-8.63

Table 84 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ					
5290	75.680	13.47	-	-	-	-	24.00	-10.53	21.37	30.00	-8.63

Table 85 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)f(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	89.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	7.90
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5290	83.820	12.94	12.92	-	-	15.93	22.10	-6.17

Table 86 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ					
5290	75.460	12.94	12.92	-	-	15.93	24.00	-8.07	23.83	30.00	-6.17

Table 87 - ISED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	84.0
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.65
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5290	82.940	12.58	12.91	-	-	15.74	23.35	-7.60

Table 88 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ					
5290	75.460	12.58	12.91	-	-	15.74	24.00	-8.26	22.40	30.00	-7.60

Table 89 - ISED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	95.9
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	7.90
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5260	21.240	17.20	-	-	-	-	22.10	-4.90
5280	21.180	17.46	-	-	-	-	22.10	-4.64
5320	25.140	17.38	-	-	-	-	22.10	-4.72

Table 90 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ					
5260	18.960	17.20	-	-	-	-	23.78	-6.58	25.10	29.78	-4.68
5280	19.020	17.46	-	-	-	-	23.79	-6.34	25.36	29.79	-4.44
5320	19.080	17.38	-	-	-	-	23.81	-6.43	25.28	29.81	-4.53

Table 91 - ISED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)f(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	96.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	7.90
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5260	21.300	12.40	12.30	-	-	15.35	22.10	-6.75
5280	21.360	12.72	12.43	-	-	15.58	22.10	-6.52
5320	26.160	12.46	12.14	-	-	15.31	22.10	-6.79

Table 92 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ					
5260	18.960	12.40	12.30	-	-	15.35	23.78	-8.43	23.25	29.78	-6.53
5280	19.020	12.72	12.43	-	-	15.58	23.79	-8.21	23.48	29.79	-6.31
5320	19.080	12.46	12.14	-	-	15.31	23.81	-8.50	23.21	29.81	-6.60

Table 93 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	95.8
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.65
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5260	21.300	15.61	15.74	-	-	18.68	23.35	-4.66
5280	21.240	15.75	15.68	-	-	18.73	23.35	-4.62
5320	26.100	15.63	15.51	-	-	18.58	23.35	-4.77

Table 94 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ					
5260	18.960	15.61	15.74	-	-	18.68	23.78	-5.09	25.34	29.78	-4.44
5280	18.960	15.75	15.68	-	-	18.73	23.78	-5.05	25.38	29.78	-4.40
5320	19.080	15.63	15.51	-	-	18.58	23.81	-5.23	25.23	29.81	-4.57

Table 95 - ISED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	97.3
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	7.90
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5260 (RU52.37)	20.220	12.26	-	-	-	-	22.10	-9.84
5280 (RU52.37)	20.220	12.32	-	-	-	-	22.10	-9.78
5320 (RU52.40)	20.760	12.38	-	-	-	-	22.10	-9.72

Table 96 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ					
5260 (RU52.37)	18.240	12.26	-	-	-	-	23.61	-11.35	20.16	29.61	-9.45
5280 (RU52.37)	18.240	12.32	-	-	-	-	23.61	-11.29	20.22	29.61	-9.39
5320 (RU52.40)	18.480	12.38	-	-	-	-	23.67	-11.28	20.28	29.67	-9.38

Table 97 - ISED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)f(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	97.2
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	7.90
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5260 (RU52.37)	19.860	7.63	7.43	-	-	10.55	22.08	-11.53
5280 (RU52.37)	19.740	7.60	7.52	-	-	10.57	22.05	-11.48
5320 (RU52.40)	19.860	7.61	7.75	-	-	10.68	22.08	-11.40

Table 98 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ					
5260 (RU52.37)	18.180	7.63	7.43	-	-	10.55	23.60	-13.05	18.45	29.60	-11.15
5280 (RU52.37)	18.180	7.60	7.52	-	-	10.57	23.60	-13.02	18.47	29.60	-11.12
5320 (RU52.40)	18.180	7.61	7.75	-	-	10.68	23.60	-12.92	18.58	29.60	-11.02

Table 99 - ISED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.65
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5260 (RU52.37)	19.740	10.67	10.47	-	-	13.58	23.30	-9.72
5280 (RU52.37)	19.740	10.68	10.38	-	-	13.54	23.30	-9.76
5320 (RU52.40)	19.800	10.67	10.67	-	-	13.68	23.31	-9.64

Table 100 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ					
5260 (RU52.37)	18.180	10.67	10.47	-	-	13.58	23.60	-10.02	20.23	29.60	-9.36
5280 (RU52.37)	18.180	10.68	10.38	-	-	13.54	23.60	-10.05	20.20	29.60	-9.40
5320 (RU52.40)	18.180	10.67	10.67	-	-	13.68	23.60	-9.92	20.33	29.60	-9.27

Table 101 - ISED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	98.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	7.90
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5260 (RU106.53)	20.640	15.35	-	-	-	-	22.10	-6.75
5280 (RU106.53)	20.760	15.41	-	-	-	-	22.10	-6.69
5320 (RU106.54)	20.880	15.28	-	-	-	-	22.10	-6.82

Table 102 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ					
5260 (RU106.53)	18.180	15.35	-	-	-	-	23.60	-8.25	23.25	29.60	-6.35
5280 (RU106.53)	18.180	15.41	-	-	-	-	23.60	-8.18	23.31	29.60	-6.28
5320 (RU106.54)	18.420	15.28	-	-	-	-	23.65	-8.37	23.18	29.65	-6.47

Table 103 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)f(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	98.2
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	7.90
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5260 (RU106.53)	20.040	10.40	10.14	-	-	13.28	22.10	-8.82
5280 (RU106.53)	19.920	10.45	10.74	-	-	13.61	22.09	-8.49
5320 (RU106.54)	20.100	10.55	10.56	-	-	13.56	22.10	-8.54

Table 104 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ					
5260 (RU106.53)	18.120	10.40	10.14	-	-	13.28	23.58	-10.30	21.18	29.58	-8.40
5280 (RU106.53)	18.120	10.45	10.74	-	-	13.61	23.58	-9.97	21.51	29.58	-8.07
5320 (RU106.54)	18.180	10.55	10.56	-	-	13.56	23.60	-10.04	21.46	29.60	-8.14

Table 105 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	97.9
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.65
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5260 (RU106.53)	19.980	13.61	13.52	-	-	16.57	23.35	-6.77
5280 (RU106.53)	19.920	13.46	13.45	-	-	16.46	23.34	-6.88
5320 (RU106.54)	20.100	13.43	13.57	-	-	16.51	23.35	-6.84

Table 106 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ					
5260 (RU106.53)	18.180	13.61	13.52	-	-	16.57	23.60	-7.02	23.23	29.60	-6.37
5280 (RU106.53)	18.180	13.46	13.45	-	-	16.46	23.60	-7.13	23.12	29.60	-6.48
5320 (RU106.54)	18.240	13.43	13.57	-	-	16.51	23.61	-7.10	23.16	29.61	-6.45

Table 107 - ISED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	93.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	7.90
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5270	42.120	19.91	-	-	-	-	22.10	-2.19
5310	52.800	14.07	-	-	-	-	22.10	-8.03

Table 108 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ					
5270	38.040	19.91	-	-	-	-	24.00	-4.09	27.81	30.00	-2.19
5310	38.160	14.07	-	-	-	-	24.00	-9.93	21.97	30.00	-8.03

Table 109 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)f(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	93.3
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	7.90
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5270	42.000	14.96	14.92	-	-	17.95	22.10	-4.15
5310	51.120	13.49	13.54	-	-	16.53	22.10	-5.57

Table 110 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ					
5270	37.920	14.96	14.92	-	-	17.95	24.00	-6.05	25.85	30.00	-4.15
5310	38.160	13.49	13.54	-	-	16.53	24.00	-7.47	24.43	30.00	-5.57

Table 111 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	93.1
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.65
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5270	41.760	18.04	17.97	-	-	21.01	23.35	-2.33
5310	52.800	14.10	13.55	-	-	16.84	23.35	-6.50

Table 112 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ					
5270	37.920	18.04	17.97	-	-	21.01	24.00	-2.99	27.67	30.00	-2.33
5310	38.160	14.10	13.55	-	-	16.84	24.00	-7.16	23.50	30.00	-6.50

Table 113 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	88.5
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	7.90
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5290	87.340	12.65	-	-	-	-	22.10	-9.45

Table 114 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ					
5290	77.440	12.65	-	-	-	-	24.00	-11.35	20.55	30.00	-9.45

Table 115 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)f(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	88.5
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	7.90
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5290	85.800	12.10	12.49	-	-	15.30	22.10	-6.80

Table 116 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ					
5290	77.440	12.10	12.49	-	-	15.30	24.00	-8.70	23.20	30.00	-6.80

Table 117 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	88.4
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.65
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5290	86.680	12.03	12.33	-	-	15.19	23.35	-8.16

Table 118 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ					
5290	77.440	12.03	12.33	-	-	15.19	24.00	-8.81	21.84	30.00	-8.16

Table 119 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.3.2.4 C63.10 12.4.3.2
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11a	Duty Cycle (%):	97.6
Data Rate:	12 Mbps	DCCF (dB):	0.10
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5500	21.420	19.04	-	-	-	-	23.60	-4.56
5580	20.760	19.04	-	-	-	-	23.60	-4.56
5700	21.720	18.28	-	-	-	-	23.60	-5.32
5720	15.380	19.08	-	-	-	-	22.47	-3.39

Table 120 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ					
5500	16.680	19.04	-	-	-	-	23.22	-4.18	25.44	29.22	-3.78
5580	16.560	19.04	-	-	-	-	23.19	-4.15	25.44	29.19	-3.75
5700	16.680	18.28	-	-	-	-	23.22	-4.95	24.68	29.22	-4.55
5720	13.100	19.08	-	-	-	-	22.17	-3.10	25.48	28.17	-2.70

Table 121 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.3.2.4 C63.10 12.4.3.2
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	96.6
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.15
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5500	22.020	19.01	-	-	-	-	23.60	-4.59
5580	21.000	18.99	-	-	-	-	23.60	-4.61
5700	22.140	16.86	-	-	-	-	23.60	-6.74
5720	15.560	19.25	-	-	-	-	22.52	-3.27

Table 122 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ					
5500	17.820	19.01	-	-	-	-	23.51	-4.50	25.41	29.51	-4.10
5580	17.640	18.99	-	-	-	-	23.46	-4.48	25.39	29.46	-4.08
5700	17.880	16.86	-	-	-	-	23.52	-6.66	23.26	29.52	-6.26
5720	13.700	19.25	-	-	-	-	22.37	-3.12	25.65	28.37	-2.72

Table 123 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.3.2.4 C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)f(i), 662911 D01 v02r01 E)1)		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	96.9
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.14
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5500	21.720	13.48	13.68	-	-	16.58	23.60	-7.02
5580	20.940	13.47	13.67	-	-	16.57	23.60	-7.03
5700	21.840	13.78	13.89	-	-	16.84	23.60	-6.76
5720	15.500	13.60	13.80	-	-	16.71	22.50	-5.79

Table 124 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ					
5500	17.820	13.48	13.68	-	-	16.58	23.51	-6.93	22.98	29.51	-6.53
5580	17.640	13.47	13.67	-	-	16.57	23.46	-6.90	22.97	29.46	-6.50
5700	17.820	13.78	13.89	-	-	16.84	23.51	-6.67	23.24	29.51	-6.27
5720	13.700	13.60	13.80	-	-	16.71	22.37	-5.66	23.11	28.37	-5.26

Table 125 - ISD Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.3.2.4 C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	94.2
Modulation Coding Scheme:	MCS10	DCCF (dB):	0.26
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.71
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5500	21.420	16.38	16.52	-	-	19.45	24.00	-4.55
5580	20.940	16.30	16.63	-	-	19.47	24.00	-4.53
5700	21.900	16.27	16.11	-	-	19.18	24.00	-4.82
5720	15.440	16.42	16.35	-	-	19.40	22.89	-3.49

Table 126 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ					
5500	17.760	16.38	16.52	-	-	19.45	23.49	-4.04	25.16	29.49	-4.33
5580	17.700	16.30	16.63	-	-	19.47	23.48	-4.01	25.18	29.48	-4.30
5700	17.820	16.27	16.11	-	-	19.18	23.51	-4.33	24.90	29.51	-4.61
5720	13.700	16.42	16.35	-	-	19.40	22.37	-2.97	25.11	28.37	-3.26

Table 127 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.3.2.4 C63.10 12.4.3.2
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	94.0
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.27
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5510	42.600	18.20	-	-	-	-	23.60	-5.40
5550	41.900	20.88	-	-	-	-	23.60	-2.72
5670	49.440	20.83	-	-	-	-	23.60	-2.77
5710	35.880	21.29	-	-	-	-	23.60	-2.31

Table 128 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ					
5510	36.600	18.20	-	-	-	-	24.00	-5.80	24.60	30.00	-5.40
5550	36.400	20.88	-	-	-	-	24.00	-3.12	27.28	30.00	-2.72
5670	36.720	20.83	-	-	-	-	24.00	-3.17	27.23	30.00	-2.77
5710	32.880	21.29	-	-	-	-	24.00	-2.71	27.69	30.00	-2.31

Table 129 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.3.2.4 C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)f(i), 662911 D01 v02r01 E)1)		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	94.0
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.27
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5510	42.960	15.93	16.21	-	-	19.08	23.60	-4.52
5550	41.280	16.43	16.05	-	-	19.25	23.60	-4.35
5670	43.080	16.43	16.18	-	-	19.32	23.60	-4.28
5710	35.520	16.47	16.90	-	-	19.70	23.60	-3.90

Table 130 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ					
5510	36.600	15.93	16.21	-	-	19.08	24.00	-4.92	25.48	30.00	-4.52
5550	36.360	16.43	16.05	-	-	19.25	24.00	-4.75	25.65	30.00	-4.35
5670	36.600	16.43	16.18	-	-	19.32	24.00	-4.68	25.72	30.00	-4.28
5710	32.880	16.47	16.90	-	-	19.70	24.00	-4.30	26.10	30.00	-3.90

Table 131 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.3.2.4 C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	90.1
Modulation Coding Scheme:	MCS10	DCCF (dB):	0.45
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.71
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5510	42.240	18.03	17.90	-	-	20.96	24.00	-3.04
5550	41.160	19.17	19.18	-	-	22.16	24.00	-1.84
5670	43.440	19.18	19.25	-	-	22.20	24.00	-1.80
5710	35.760	19.02	19.45	-	-	22.25	24.00	-1.75

Table 132 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ					
5510	36.600	18.03	17.90	-	-	20.96	24.00	-3.04	26.68	30.00	-3.32
5550	36.360	19.17	19.18	-	-	22.16	24.00	-1.84	27.87	30.00	-2.13
5670	36.720	19.18	19.25	-	-	22.20	24.00	-1.80	27.92	30.00	-2.08
5710	32.880	19.02	19.45	-	-	22.25	24.00	-1.75	27.96	30.00	-2.04

Table 133 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.3.2.4 C63.10 12.4.3.2
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	89.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.51
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5530	84.260	16.67	-	-	-	-	23.60	-6.93
5610	87.340	20.79	-	-	-	-	23.60	-2.81
5690	76.140	21.64	-	-	-	-	23.60	-1.96

Table 134 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ					
5530	75.900	16.67	-	-	-	-	24.00	-7.33	23.07	30.00	-6.93
5610	75.900	20.79	-	-	-	-	24.00	-3.21	27.19	30.00	-2.81
5690	72.180	21.64	-	-	-	-	24.00	-2.36	28.04	30.00	-1.96

Table 135 - ISED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.3.2.4 C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)f(i), 662911 D01 v02r01 E)1)		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	89.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.51
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5530	83.820	15.24	15.49	-	-	18.37	23.60	-5.23
5610	84.040	16.94	16.81	-	-	19.87	23.60	-3.73
5690	75.920	17.85	17.85	-	-	20.86	23.60	-2.74

Table 136 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ					
5530	75.460	15.24	15.49	-	-	18.37	24.00	-5.63	24.77	30.00	-5.23
5610	75.680	16.94	16.81	-	-	19.87	24.00	-4.13	26.27	30.00	-3.73
5690	72.180	17.85	17.85	-	-	20.86	24.00	-3.14	27.26	30.00	-2.74

Table 137 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.3.2.4 C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	84.1
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.75
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.71
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5530	84.040	15.41	15.88	-	-	18.64	24.00	-5.36
5610	85.140	19.65	19.43	-	-	22.55	24.00	-1.45
5690	75.920	20.74	20.47	-	-	23.62	24.00	-0.38

Table 138 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ					
5530	75.460	15.41	15.88	-	-	18.64	24.00	-5.36	24.36	30.00	-5.64
5610	75.680	19.65	19.43	-	-	22.55	24.00	-1.45	28.26	30.00	-1.74
5690	72.180	20.74	20.47	-	-	23.62	24.00	-0.38	29.33	30.00	-0.67

Table 139 - ISED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.3.2.4 C63.10 12.4.3.2
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	95.8
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.18
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5500	24.960	18.96	-	-	-	-	23.60	-4.64
5580	21.300	18.85	-	-	-	-	23.60	-4.75
5700	26.580	13.90	-	-	-	-	23.60	-9.70
5720	15.560	18.34	-	-	-	-	22.52	-4.18

Table 140 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ					
5500	19.140	18.96	-	-	-	-	23.82	-4.86	25.36	29.82	-4.46
5580	19.020	18.85	-	-	-	-	23.79	-4.94	25.25	29.79	-4.54
5700	19.080	13.90	-	-	-	-	23.81	-9.91	20.30	29.81	-9.51
5720	14.420	18.34	-	-	-	-	22.59	-4.25	24.74	28.59	-3.85

Table 141 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.3.2.4 C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)f(i), 662911 D01 v02r01 E)1)		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	96.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.17
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5500	24.720	13.61	13.16	-	-	16.40	23.60	-7.20
5580	21.240	13.40	13.35	-	-	16.39	23.60	-7.21
5700	25.020	13.38	13.20	-	-	16.29	23.60	-7.31
5720	15.620	13.15	13.19	-	-	16.18	22.54	-6.36

Table 142 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ					
5500	19.080	13.61	13.16	-	-	16.40	23.81	-7.41	22.80	29.81	-7.01
5580	19.020	13.40	13.35	-	-	16.39	23.79	-7.40	22.79	29.79	-7.00
5700	19.080	13.38	13.20	-	-	16.29	23.81	-7.51	22.69	29.81	-7.11
5720	14.420	13.15	13.19	-	-	16.18	22.59	-6.41	22.58	28.59	-6.01

Table 143 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.3.2.4 C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	95.8
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.18
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.71
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5500	24.180	16.21	15.82	-	-	19.03	24.00	-4.97
5580	21.180	16.17	16.08	-	-	19.13	24.00	-4.87
5700	24.360	13.73	13.70	-	-	16.72	24.00	-7.28
5720	15.620	15.83	15.75	-	-	18.80	22.94	-4.14

Table 144 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ					
5500	19.080	16.21	15.82	-	-	19.03	23.81	-4.78	24.74	29.81	-5.07
5580	18.960	16.17	16.08	-	-	19.13	23.78	-4.65	24.84	29.78	-4.94
5700	19.080	13.73	13.70	-	-	16.72	23.81	-7.08	22.44	29.81	-7.37
5720	14.420	15.83	15.75	-	-	18.80	22.59	-3.79	24.51	28.59	-4.08

Table 145 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.3.2.4 C63.10 12.4.3.2
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	97.3
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.12
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5500 (RU52.37)	20.160	13.75	-	-	-	-	23.60	-9.85
5580 (RU52.37)	20.160	13.63	-	-	-	-	23.60	-9.97
5700 (RU52.40)	20.700	13.60	-	-	-	-	23.60	-10.00
5720 (RU52.40)	15.140	-1.38	-	-	-	-	22.40	-23.78

Table 146 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ					
5500 (RU52.37)	18.240	13.75	-	-	-	-	23.61	-9.86	20.15	29.61	-9.46
5580 (RU52.37)	18.240	13.63	-	-	-	-	23.61	-9.98	20.03	29.61	-9.58
5700 (RU52.40)	18.480	13.60	-	-	-	-	23.67	-10.07	20.00	29.67	-9.67
5720 (RU52.40)	14.000	-1.38	-	-	-	-	22.46	-23.84	5.02	28.46	-23.44

Table 147 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.3.2.4 C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)f(i), 662911 D01 v02r01 E)1)		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	97.2
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.12
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5500 (RU52.37)	19.680	8.62	8.55	-	-	11.59	23.54	-11.95
5580 (RU52.37)	19.800	8.17	8.55	-	-	11.37	23.57	-12.19
5700 (RU52.40)	19.980	8.41	8.27	-	-	11.35	23.60	-12.25
5720 (RU52.40)	14.240	-6.55	-6.76	-	-	-3.64	22.14	-25.78

Table 148 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ					
5500 (RU52.37)	18.180	8.62	8.55	-	-	11.59	23.60	-12.01	17.99	29.60	-11.61
5580 (RU52.37)	18.180	8.17	8.55	-	-	11.37	23.60	-12.22	17.77	29.60	-11.82
5700 (RU52.40)	18.180	8.41	8.27	-	-	11.35	23.60	-12.25	17.75	29.60	-11.85
5720 (RU52.40)	13.700	-6.55	-6.76	-	-	-3.64	22.37	-26.01	2.76	28.37	-25.61

Table 149 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.3.2.4 C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	97.3
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.12
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.71
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5500 (RU52.37)	19.920	11.37	11.25	-	-	14.32	23.99	-9.67
5580 (RU52.37)	19.800	11.12	11.38	-	-	14.25	23.97	-9.71
5700 (RU52.40)	19.860	11.38	11.26	-	-	14.33	23.98	-9.65
5720 (RU52.40)	14.300	-3.47	-4.47	-	-	-0.93	22.55	-23.49

Table 150 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ					
5500 (RU52.37)	18.180	11.37	11.25	-	-	14.32	23.60	-9.28	20.03	29.60	-9.56
5580 (RU52.37)	18.180	11.12	11.38	-	-	14.25	23.60	-9.34	19.97	29.60	-9.63
5700 (RU52.40)	18.180	11.38	11.26	-	-	14.33	23.60	-9.27	20.04	29.60	-9.55
5720 (RU52.40)	13.700	-3.47	-4.47	-	-	-0.93	22.37	-23.30	4.78	28.37	-23.59

Table 151 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.3.2.4 C63.10 12.4.3.2
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	97.9
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.09
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5500 (RU106.53)	20.580	16.72	-	-	-	-	23.60	-6.88
5580 (RU106.53)	20.700	16.73	-	-	-	-	23.60	-6.87
5700 (RU106.54)	21.060	16.23	-	-	-	-	23.60	-7.37
5720 (RU106.54)	15.380	14.39	-	-	-	-	22.47	-8.08

Table 152 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ					
5500 (RU106.53)	18.180	16.72	-	-	-	-	23.60	-6.88	23.12	29.60	-6.48
5580 (RU106.53)	18.180	16.73	-	-	-	-	23.60	-6.86	23.13	29.60	-6.46
5700 (RU106.54)	18.480	16.23	-	-	-	-	23.67	-7.43	22.63	29.67	-7.03
5720 (RU106.54)	13.760	14.39	-	-	-	-	22.39	-8.00	20.79	28.39	-7.60

Table 153 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.3.2.4 C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)f(i), 662911 D01 v02r01 E)1)		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	97.9
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.09
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5500 (RU106.53)	19.860	11.53	11.42	-	-	14.48	23.58	-9.10
5580 (RU106.53)	19.980	11.29	11.60	-	-	14.45	23.60	-9.15
5700 (RU106.54)	20.220	11.42	11.10	-	-	14.25	23.60	-9.35
5720 (RU106.54)	14.540	9.10	8.56	-	-	11.85	22.23	-10.37

Table 154 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ					
5500 (RU106.53)	18.120	11.53	11.42	-	-	14.48	23.58	-9.10	20.88	29.58	-8.70
5580 (RU106.53)	18.120	11.29	11.60	-	-	14.45	23.58	-9.14	20.85	29.58	-8.74
5700 (RU106.54)	18.240	11.42	11.10	-	-	14.25	23.61	-9.36	20.65	29.61	-8.96
5720 (RU106.54)	13.580	9.10	8.56	-	-	11.85	22.33	-10.48	18.25	28.33	-10.08

Table 155 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.3.2.4 C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	97.8
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.10
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.71
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5500 (RU106.53)	19.740	14.41	14.36	-	-	17.39	23.95	-6.56
5580 (RU106.53)	19.920	14.03	14.25	-	-	17.15	23.99	-6.84
5700 (RU106.54)	20.160	14.26	14.42	-	-	17.34	24.00	-6.66
5720 (RU106.54)	14.540	11.79	11.69	-	-	14.75	22.63	-7.87

Table 156 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ					
5500 (RU106.53)	18.120	14.41	14.36	-	-	17.39	23.58	-6.19	23.10	29.58	-6.48
5580 (RU106.53)	18.120	14.03	14.25	-	-	17.15	23.58	-6.43	22.87	29.58	-6.72
5700 (RU106.54)	18.240	14.26	14.42	-	-	17.34	23.61	-6.27	23.05	29.61	-6.56
5720 (RU106.54)	13.580	11.79	11.69	-	-	14.75	22.33	-7.58	20.47	28.33	-7.86

Table 157 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.3.2.4 C63.10 12.4.3.2
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	93.2
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.31
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5510	52.920	17.19	-	-	-	-	23.60	-6.41
5550	42.000	20.36	-	-	-	-	23.60	-3.24
5670	53.040	18.94	-	-	-	-	23.60	-4.66
5710	36.360	21.17	-	-	-	-	23.60	-2.43

Table 158 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ					
5510	38.160	17.19	-	-	-	-	24.00	-6.81	23.59	30.00	-6.41
5550	37.920	20.36	-	-	-	-	24.00	-3.64	26.76	30.00	-3.24
5670	38.160	18.94	-	-	-	-	24.00	-5.06	25.34	30.00	-4.66
5710	33.840	21.17	-	-	-	-	24.00	-2.83	27.57	30.00	-2.43

Table 159 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.3.2.4 C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)f(i), 662911 D01 v02r01 E)1)		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	93.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.31
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5510	52.800	16.07	16.03	-	-	19.06	23.60	-4.54
5550	42.000	15.90	15.59	-	-	18.75	23.60	-4.85
5670	52.800	15.90	16.07	-	-	18.99	23.60	-4.61
5710	36.000	16.23	16.41	-	-	19.33	23.60	-4.27

Table 160 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ					
5510	38.160	16.07	16.03	-	-	19.06	24.00	-4.94	25.46	30.00	-4.54
5550	37.920	15.90	15.59	-	-	18.75	24.00	-5.25	25.15	30.00	-4.85
5670	38.160	15.90	16.07	-	-	18.99	24.00	-5.01	25.39	30.00	-4.61
5710	33.720	16.23	16.41	-	-	19.33	24.00	-4.67	25.73	30.00	-4.27

Table 161 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.3.2.4 C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	93.1
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.31
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.71
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5510	52.680	17.03	16.67	-	-	19.86	24.00	-4.14
5550	41.760	18.80	18.62	-	-	21.71	24.00	-2.29
5670	53.040	18.01	17.95	-	-	20.99	24.00	-3.01
5710	36.000	18.87	19.27	-	-	22.08	24.00	-1.92

Table 162 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ					
5510	38.160	17.03	16.67	-	-	19.86	24.00	-4.14	25.57	30.00	-4.43
5550	37.920	18.80	18.62	-	-	21.71	24.00	-2.29	27.43	30.00	-2.57
5670	38.160	18.01	17.95	-	-	20.99	24.00	-3.01	26.70	30.00	-3.30
5710	33.840	18.87	19.27	-	-	22.08	24.00	-1.92	27.80	30.00	-2.20

Table 163 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.3.2.4 C63.10 12.4.3.2
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	88.5
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.53
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5530	87.120	16.52	-	-	-	-	23.60	-7.08
5690	76.580	21.62	-	-	-	-	23.60	-1.98

Table 164 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ					
5530	77.220	16.52	-	-	-	-	24.00	-7.48	22.92	30.00	-7.08
5690	73.280	21.62	-	-	-	-	24.00	-2.38	28.02	30.00	-1.98

Table 165 - ISED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.3.2.4 C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)f(i), 662911 D01 v02r01 E)1)		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	88.5
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.53
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5530	85.800	15.17	15.32	-	-	18.26	23.60	-5.34
5690	76.360	17.79	17.88	-	-	20.84	23.60	-2.76

Table 166 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ					
5530	77.220	15.17	15.32	-	-	18.26	24.00	-5.74	24.66	30.00	-5.34
5690	73.280	17.79	17.88	-	-	20.84	24.00	-3.16	27.24	30.00	-2.76

Table 167 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.3.2.4 C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	88.5
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.53
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.71
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5530	86.900	15.86	15.97	-	-	18.93	24.00	-5.07
5690	76.360	20.55	20.36	-	-	23.46	24.00	-0.54

Table 168 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ					
5530	77.220	15.86	15.97	-	-	18.93	24.00	-5.07	24.64	30.00	-5.36
5690	73.280	20.55	20.36	-	-	23.46	24.00	-0.54	29.18	30.00	-0.82

Table 169 - ISED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.3.2.4
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11a	Duty Cycle (%):	97.8
Data Rate:	12 Mbps	DCCF (dB):	0.10
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720	11.48	-	-	-	-	29.60	-18.12

Table 170 - Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a	Duty Cycle (%):	97.8
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.40
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5745	-	20.78	-	-	-	29.60	-8.82
5785	-	20.72	-	-	-	29.60	-8.88
5825	-	20.94	-	-	-	29.60	-8.66

Table 171 - Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.3.2.4
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	96.9
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.14
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720	12.23	-	-	-	-	29.60	-17.37

Table 172 - Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	96.8
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.40
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5745	-	20.87	-	-	-	29.60	-8.73
5785	-	20.67	-	-	-	29.60	-8.93
5825	-	20.92	-	-	-	29.60	-8.68

Table 173 - Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.3.2.4 C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)f(i), 662911 D01 v02r01 E)1)		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	96.8
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.14
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720	6.69	6.81	-	-	9.76	29.60	-19.84
5745	20.79	20.99	-	-	23.89	29.60	-5.71
5785	20.93	20.69	-	-	23.82	29.60	-5.78
5825	20.54	20.86	-	-	23.71	29.60	-5.89

Table 174 - Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.3.2.4 C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	94.6
Modulation Coding Scheme:	MCS10	DCCF (dB):	0.24
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720	9.45	9.32	-	-	12.40	29.60	-17.20
5745	20.66	20.68	-	-	23.67	29.84	-6.17
5785	20.91	20.70	-	-	23.81	29.84	-6.03
5825	20.54	20.87	-	-	23.70	29.84	-6.15

Table 175 - Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.3.2.4
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	94.2
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.26
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5710	9.59	-	-	-	-	29.60	-20.01

Table 176 - Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	94.2
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.40
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5755	-	20.70	-	-	-	29.60	-8.90
5795	-	20.81	-	-	-	29.60	-8.79

Table 177 - Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.3.2.4 C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)f(i), 662911 D01 v02r01 E)1)		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	94.1
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.26
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5710	4.61	4.91	-	-	7.77	29.60	-21.83
5755	20.72	20.71	-	-	23.72	29.60	-5.88
5795	20.77	20.82	-	-	23.79	29.60	-5.81

Table 178 - Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.3.2.4 C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	90.4
Modulation Coding Scheme:	MCS10	DCCF (dB):	0.44
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5710	7.32	7.72	-	-	10.53	29.60	-19.07
5755	20.82	20.74	-	-	23.78	29.84	-6.07
5795	20.79	20.82	-	-	23.79	29.84	-6.05

Table 179 - Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.3.2.4
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	89.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.47
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5690	5.82	-	-	-	-	29.60	-23.78

Table 180 - Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	89.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.40
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5775	-	20.73	-	-	-	29.60	-8.87

Table 181 - Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.3.2.4 C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)f(i), 662911 D01 v02r01 E)1)		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	89.6
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.47
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5690	2.24	1.77	-	-	5.02	29.60	-24.58
5775	19.51	19.81	-	-	22.67	29.60	-6.93

Table 182 - Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.3.2.4 C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	85.0
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.70
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5690	5.22	5.12	-	-	8.18	29.60	-21.42
5775	19.93	20.36	-	-	23.15	29.84	-6.70

Table 183 - Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.3.2.4
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	96.5
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.15
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720	13.05	-	-	-	-	29.60	-16.55

Table 184 - Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	96.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.40
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5745	-	20.86	-	-	-	29.60	-8.74
5785	-	20.67	-	-	-	29.60	-8.93
5825	-	20.82	-	-	-	29.60	-8.78

Table 185 - Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.3.2.4 C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)f(i), 662911 D01 v02r01 E)1)		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	96.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.17
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720	7.87	7.93	-	-	10.91	29.60	-18.69
5745	20.83	20.69	-	-	23.76	29.60	-5.84
5785	20.80	20.80	-	-	23.81	29.60	-5.79
5825	20.52	20.65	-	-	23.59	29.60	-6.01

Table 186 - Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.3.2.4 C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	96.1
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.17
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720	10.66	10.53	-	-	13.60	29.60	-16.00
5745	20.82	20.69	-	-	23.76	29.84	-6.08
5785	20.79	20.81	-	-	23.80	29.84	-6.04
5825	20.52	20.65	-	-	23.59	29.84	-6.25

Table 187 - Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 RU26	Duty Cycle (%):	97.5
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.40
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5745 (RU26.0)	-	12.78	-	-	-	29.60	-16.82
5785 (RU26.0)	-	12.66	-	-	-	29.60	-16.94
5825 (RU26.8)	-	12.84	-	-	-	29.60	-16.76

Table 188 - Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)f)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE20 RU26	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5745 (RU26.0)	12.63	12.66	-	-	15.64	29.60	-13.96
5785 (RU26.0)	12.84	12.71	-	-	15.77	29.60	-13.83
5825 (RU26.8)	12.66	12.82	-	-	15.74	29.60	-13.86

Table 189 - Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE20 RU26	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.16
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5745 (RU26.0)	12.77	12.63	-	-	15.67	29.84	-14.17
5785 (RU26.0)	12.89	12.75	-	-	15.82	29.84	-14.02
5825 (RU26.8)	12.67	12.84	-	-	15.74	29.84	-14.10

Table 190 - Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.3.2.4
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	97.3
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.12
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720 (RU52.40)	13.92	-	-	-	-	29.60	-15.68

Table 191 - Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	97.2
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.40
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5745 (RU52.37)	-	15.81	-	-	-	29.60	-13.79
5785 (RU52.37)	-	15.73	-	-	-	29.60	-13.87
5825 (RU52.40)	-	15.75	-	-	-	29.60	-13.85

Table 192 - Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.3.2.4 C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)f(i), 662911 D01 v02r01 E)1)		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.12
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720 (RU52.40)	9.08	8.67	-	-	11.89	29.60	-17.71
5745 (RU52.37)	15.63	15.50	-	-	18.58	29.60	-11.02
5785 (RU52.37)	15.58	15.97	-	-	18.77	29.60	-10.83
5825 (RU52.40)	15.41	15.65	-	-	18.54	29.60	-11.06

Table 193 - Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.3.2.4 C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	97.3
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.12
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720 (RU52.40)	12.18	11.59	-	-	14.91	29.60	-14.69
5745 (RU52.37)	15.64	15.52	-	-	18.59	29.84	-11.25
5785 (RU52.37)	15.54	15.99	-	-	18.77	29.84	-11.07
5825 (RU52.40)	15.41	15.67	-	-	18.55	29.84	-11.29

Table 194 - Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.3.2.4
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	97.9
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.09
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720 (RU106.54)	14.80	-	-	-	-	23.68	-8.88

Table 195 - Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	97.9
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.40
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5745 (RU106.53)	-	18.88	-	-	-	29.60	-10.72
5785 (RU106.53)	-	18.99	-	-	-	29.60	-10.61
5825 (RU106.54)	-	18.97	-	-	-	29.60	-10.63

Table 196 - Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.3.2.4 C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)f(i), 662911 D01 v02r01 E)1)		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	97.9
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.09
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720 (RU106.54)	9.66	9.09	-	-	12.39	29.60	-17.21
5745 (RU106.53)	18.74	18.36	-	-	21.56	29.60	-8.04
5785 (RU106.53)	18.78	18.99	-	-	21.87	29.60	-7.73
5825 (RU106.54)	18.48	18.80	-	-	21.63	29.60	-7.97

Table 197 - Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.3.2.4 C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	98.0
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.09
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720 (RU106.54)	12.24	12.16	-	-	15.21	29.60	-14.39
5745 (RU106.53)	18.75	18.37	-	-	21.57	29.84	-8.27
5785 (RU106.53)	18.59	18.68	-	-	21.64	29.84	-8.20
5825 (RU106.54)	18.46	18.81	-	-	21.62	29.84	-8.22

Table 198 - Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.3.2.4
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	93.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.30
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5710	11.51	-	-	-	-	29.60	-18.09

Table 199 - Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	93.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.40
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5755	-	20.83	-	-	-	29.60	-8.77
5795	-	20.76	-	-	-	29.60	-8.84

Table 200 - Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.3.2.4 C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)f(i), 662911 D01 v02r01 E)1)		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	93.3
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.30
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5710	6.71	6.54	-	-	9.63	29.60	-19.97
5755	20.78	20.85	-	-	23.83	29.60	-5.77
5795	20.74	20.82	-	-	23.79	29.60	-5.81

Table 201 - Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.3.2.4 C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	93.3
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.30
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5710	9.34	9.60	-	-	12.48	29.60	-17.12
5755	20.76	20.83	-	-	23.80	29.84	-6.04
5795	20.74	20.83	-	-	23.79	29.84	-6.05

Table 202 - Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.3.2.4
Additional Reference(s):	-		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	89.3
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.49
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5690	7.81	-	-	-	-	29.60	-21.79

Table 203 - Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	89.3
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.40
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5775	-	20.93	-	-	-	29.60	-8.67

Table 204 - Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.3.2.4 C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)f(i), 662911 D01 v02r01 E)1)		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	89.2
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.50
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5690	4.07	4.11	-	-	7.10	29.60	-22.50
5775	20.06	20.29	-	-	23.19	29.60	-6.41

Table 205 - Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.3.2.4 C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	89.2
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.50
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5690	6.71	6.33	-	-	9.53	29.60	-20.07
5775	20.21	20.50	-	-	23.37	29.84	-6.48

Table 206 - Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	93.4
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	9.17
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5180	12.72	13.30	-	-	16.02	20.83	-4.82
5200	12.79	13.28	-	-	16.05	20.83	-4.78
5240	12.30	13.16	-	-	15.76	20.83	-5.07

Table 207 - FCC Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	93.1
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	9.17
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ			
5180	18.240	5.90	6.42	-	-	9.18	18.34	22.61	-4.27
5200	17.940	5.90	6.56	-	-	9.24	18.40	22.54	-4.14
5240	18.060	5.41	6.13	-	-	8.79	17.96	22.57	-4.61

Table 208 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	93.1
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	9.17
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5190	15.31	16.00	-	-	18.67	20.83	-2.17
5230	14.79	15.84	-	-	18.35	20.83	-2.48

Table 209 - FCC Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	92.8
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	9.17
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ			
5190	37.440	8.19	8.84	-	-	11.53	20.70	23.00	-2.30
5230	36.960	8.02	8.71	-	-	11.39	20.55	23.00	-2.45

Table 210 - ISED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	93.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	9.17
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5210	14.05	14.73	-	-	17.41	20.83	-3.43

Table 211 - FCC Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	93.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	9.17
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ			
5210	77.760	8.95	9.72	-	-	12.36	21.53	23.00	-1.47

Table 212 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	93.5
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	9.54
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5260	21.000	11.95	12.62	-	-	15.31	20.46	-5.15
5280	20.940	11.86	12.50	-	-	15.20	20.46	-5.26
5320	21.840	11.93	12.90	-	-	15.45	20.46	-5.01

Table 213 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ					
5260	17.700	11.95	12.62	-	-	15.31	23.48	-8.17	24.85	29.48	-4.63
5280	17.700	11.86	12.50	-	-	15.20	23.48	-8.28	24.74	29.48	-4.74
5320	17.820	11.93	12.90	-	-	15.45	23.51	-8.06	24.99	29.51	-4.52

Table 214 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	92.5
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	9.54
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5270	41.400	14.53	15.29	-	-	17.94	20.46	-2.52
5310	44.040	13.34	14.81	-	-	17.15	20.46	-3.31

Table 215 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ					
5270	36.360	14.53	15.29	-	-	17.94	24.00	-6.06	27.48	30.00	-2.52
5310	36.720	13.34	14.81	-	-	17.15	24.00	-6.85	26.69	30.00	-3.31

Table 216 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	93.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	9.54
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5290	86.240	11.52	12.76	-	-	15.20	20.46	-5.26

Table 217 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ					
5290	75.900	11.52	12.76	-	-	15.20	24.00	-8.80	24.74	30.00	-5.26

Table 218 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d(i), 662911 D01 v02r01 E)1)		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	93.3
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.30
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.69
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5500	21.840	12.58	14.01	-	-	16.36	21.31	-4.95
5580	21.000	12.49	13.99	-	-	16.31	21.31	-5.00
5700	21.900	12.08	13.97	-	-	16.13	21.31	-5.17
5720	15.500	11.45	12.58	-	-	15.06	20.21	-5.15

Table 219 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ					
5500	17.820	12.58	14.01	-	-	16.36	23.51	-7.15	25.05	29.51	-4.46
5580	17.760	12.49	13.99	-	-	16.31	23.49	-7.18	25.00	29.49	-4.49
5700	17.820	12.08	13.97	-	-	16.13	23.51	-7.38	24.83	29.51	-4.68
5720	13.760	11.45	12.58	-	-	15.06	22.39	-7.32	23.76	28.39	-4.63

Table 220 - ISD Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	93.0
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.32
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.69
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5510	43.920	13.83	14.98	-	-	17.44	21.31	-3.87
5550	41.520	15.15	16.55	-	-	18.91	21.31	-2.40
5670	45.480	14.46	16.14	-	-	18.39	21.31	-2.92
5710	35.880	14.81	16.05	-	-	18.48	21.31	-2.83

Table 221 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ					
5510	36.720	13.83	14.98	-	-	17.44	24.00	-6.56	26.13	30.00	-3.87
5550	36.360	15.15	16.55	-	-	18.91	24.00	-5.09	27.60	30.00	-2.40
5670	36.840	14.46	16.14	-	-	18.39	24.00	-5.61	27.08	30.00	-2.92
5710	32.880	14.81	16.05	-	-	18.48	24.00	-5.52	27.17	30.00	-2.83

Table 222 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	92.9
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.32
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.69
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5530	85.800	12.24	13.58	-	-	15.96	21.31	-5.34
5610	84.480	15.31	16.55	-	-	18.99	21.31	-2.32
5690	76.140	15.85	16.75	-	-	19.34	21.31	-1.97

Table 223 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ					
5530	76.120	12.24	13.58	-	-	15.96	24.00	-8.04	24.66	30.00	-5.34
5610	75.900	15.31	16.55	-	-	18.99	24.00	-5.01	27.68	30.00	-2.32
5690	72.180	15.85	16.75	-	-	19.34	24.00	-4.66	28.03	30.00	-1.97

Table 224 - ISED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	93.6
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.29
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	9.41
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720	4.54	5.54	-	-	8.08	26.59	-18.51
5745	19.81	20.89	-	-	23.37	26.84	-3.47
5785	19.78	20.87	-	-	23.36	26.84	-3.47
5825	19.35	20.70	-	-	23.09	26.84	-3.75

Table 225 - Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	93.4
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.30
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	9.41
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5710	2.84	4.14	-	-	6.54	26.59	-20.05
5755	19.61	20.81	-	-	23.25	26.84	-3.59
5795	19.58	20.74	-	-	23.20	26.84	-3.64

Table 226 - Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	93.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.31
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	9.41
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5690	-0.47	0.86	-	-	3.25	26.59	-23.34
5775	16.23	17.16	-	-	19.73	26.84	-7.11

Table 227 - Maximum Conducted (average) Output Power Results



FCC 47 CFR Part 15E, Limit Clause 15.407(a)

Condition of Operation	Frequency Range (MHz)			
	5150-5250	5250-5350	5470-5725	5725-5850
Max Conducted TX Power	30 dBm (1W) for master device 24 dBm (250 mW) for client device	24 dBm (250 mW) or 11 dBm + 10 Log B, whichever is lower (B = 26 dB emission BW)		30 dBm (1 W)
Max EIRP	4W (36 dBm) with 6 dBi antenna 200 W (53 dBm) for fixed P-t-P application with 23 dBi antenna Additional rule for outdoor operation: Max_EIRP < 125 mW (21 dBm) at any elevation angle > 30° from horizon.	1 W (30 dBm) with 6 dBi antenna		4 W (36 dBm) with 6 dBi antenna. No EIRP limit for fixed P-t-P application (i.e. no antenna gain limit)

Table 228

ISED RSS-247, Limit Clause 6.2.1.1, 6.2.2.1, 6.2.3.1 and 6.2.4.1

Device	Frequency Range (MHz)			
	5150-5250	5250-5350	5470-5725	5725-5850
OEM installed in vehicles	30 mW or $1.76 + 10 \log_{10} B$, dBm (EIRP); whichever is less	30 mW or $1.76 + 10 \log_{10} B$, dBm (EIRP); whichever is less	-	-
Other	200 mW or $10 + 10 \log_{10} B$ dBm (EIRP); whichever is less	250 mW or $11 + 10 \log_{10} B$; whichever is less 1.0 W or $17 + 10 \log_{10} B$ dBm EIRP; whichever is less	250 mW or $11 + 10 \log_{10} B$; whichever is less 1.0 W or $17 + 10 \log_{10} B$ dBm EIRP; whichever is less	1W 4W EIRP

Table 229



2.2.7 Test Location and Test Equipment Used

This test was carried out in RF Laboratory 1.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Expires
Rubidium Standard	Rohde & Schwarz	XSRM	1316	6	03-Dec-2021
Multimeter	Iso-tech	IDM101	2421	12	30-Oct-2021
Hygrometer	Rotronic	I-1000	3220	12	16-Oct-2021
Frequency Standard	Spectracom	SecureSync 1200-0408-0601	4393	6	03-Dec-2021
Power splitter - 2 port	Mini-Circuits	ZN2PD-63-S+	4742	12	15-Jan-2022
Climatic Chamber	Aralab	FitoTerm 300E45	4823	12	12-Apr-2022
EXA	Keysight Technologies	N9010B	4969	24	03-Feb-2022
USB Power Sensor	Boonton	RTP5006	5184	12	19-Apr-2022
USB Power Sensor	Boonton	RTP5006	5187	12	19-Apr-2022
AC Programmable Power Supply	iTech	IT7324	5225	-	O/P Mon
Power Splitter, 2 way	Mini-Circuits	ZN2PD2-63-S+	5239	-	O/P Mon
Attenuator 5W 20dB DC-18GHz	Aaren	AT40A-4041-D18-20	5498	12	10-May-2022
Signal Commissioning Unit	TUV SUD	SCU001	5546	12	16-Apr-2022
Attenuator 2W 10dB DC-10GHz	Telegartner	J01156A0031	5576	-	O/P Mon
Attenuator 2W 10dB DC-10GHz	Telegartner	J01156A0031	5580	-	O/P Mon
2-Way Power Divider (2-8 GHz)	Aaren	AT30A-TE0208-2-AF	5685	12	18-Dec-2021
2-Way Power Divider (2-8 GHz)	Aaren	AT30A-TE0208-2-AF	5687	12	18-Dec-2021
Signal Commissioning Unit	TUV SUD	SCU002	5759	12	30-Jun-2022
USB Power Sensor	Boonton	RTP5008	5830	12	10-May-2022
USB Power Sensor	Boonton	RTP5008	5832	12	10-May-2022

Table 230

O/P Mon – Output Monitored using calibrated equipment



2.3 Maximum Conducted Power Spectral Density

2.3.1 Specification Reference

FCC 47 CFR Part 15E, Clause 15.407 (a)
ISED RSS-247, Clause 6.2

2.3.2 Equipment Under Test and Modification State

A2442, S/N: V3WLWCFN6 - Modification State 0
A2442, S/N: MJ2Y719JTQ – Modification State 0

2.3.3 Date of Test

20-August-2021 to 20-September-2021

2.3.4 Test Method

The test was performed in accordance with ANSI C63.10, clause 12.6 and 12.4.2.

The EUT duty cycle was < 98 % and repeatable within 2 %, the spectrum analyser was set to trace (power) averaging and a duty cycle correction was added as calculated in the result tables below (Method SA-2).

Results for the U-NII-3 band were measured in a narrower bandwidth and integrated over 500 kHz using the spectrum analyzers channel power integration function.

MIMO output port summing was performed in accordance with KDB 662911 D01:

For the CDD results the directional gain was calculated in accordance with the equation given in clause F)2)f)(ii) summed for a single spacial stream.

For SDM modes directional gain was calculated in accordance with clause F)2)d)(ii).

For transmit beamforming (TxBF) mode it was calculated in accordance with clause F)2)d)(i).

2.3.5 Environmental Conditions

Ambient Temperature	21.4 - 23.0 °C
Relative Humidity	48.9 – 61.7 %



2.3.6 Test Results

5 GHz WLAN

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11a	Duty Cycle (%):	97.6
Data Rate:	12 Mbps	DCCF (dB):	0.10
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.50
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5180	9.70	-	-	-	-	10.50	-0.80
5200	9.69	-	-	-	-	10.50	-0.81
5240	9.86	-	-	-	-	10.50	-0.64

Table 231 - FCC Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11a	Duty Cycle (%):	97.8
Data Rate:	12 Mbps	DCCF (dB):	0.10
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.50
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ			
5180	2.72	-	-	-	-	9.22	10.00	-0.78
5200	2.55	-	-	-	-	9.05	10.00	-0.95
5240	2.93	-	-	-	-	9.43	10.00	-0.57

Table 232 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	96.6
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.15
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.50
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5180	9.61	-	-	-	-	10.50	-0.89
5200	9.29	-	-	-	-	10.50	-1.21
5240	9.59	-	-	-	-	10.50	-0.91

Table 233 - FCC Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	96.9
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.14
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.50
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ			
5180	2.58	-	-	-	-	9.08	10.00	-0.92
5200	2.36	-	-	-	-	8.86	10.00	-1.14
5240	2.49	-	-	-	-	8.99	10.00	-1.01

Table 234 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	97.0
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.13
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.17
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5180	3.41	3.47	-	-	6.45	7.83	-1.38
5200	3.20	3.25	-	-	6.23	7.83	-1.60
5240	3.96	4.00	-	-	6.99	7.83	-0.84

Table 235 - FCC Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	96.9
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.14
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.17
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ			
5180	-3.21	-3.27	-	-	-0.23	8.93	10.00	-1.07
5200	-3.79	-3.97	-	-	-0.87	8.30	10.00	-1.70
5240	-3.20	-2.74	-	-	0.05	9.22	10.00	-0.78

Table 236 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	94.2
Modulation Coding Scheme:	MCS10	DCCF (dB):	0.26
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.16
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5180	6.95	6.62	-	-	9.80	10.84	-1.03
5200	6.85	6.85	-	-	9.86	10.84	-0.97
5240	6.68	7.13	-	-	9.93	10.84	-0.91

Table 237 - FCC Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	94.4
Modulation Coding Scheme:	MCS10	DCCF (dB):	0.25
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.16
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ			
5180	-0.24	-0.02	-	-	2.88	9.04	10.00	-0.96
5200	-0.77	-0.43	-	-	2.41	8.58	10.00	-1.42
5240	-0.07	-0.11	-	-	2.92	9.08	10.00	-0.92

Table 238 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	94.0
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.27
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.50
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5190	4.90	-	-	-	-	10.50	-5.60
5230	8.61	-	-	-	-	10.50	-1.89

Table 239 - FCC Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	94.0
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.27
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.50
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ			
5190	2.08	-	-	-	-	8.58	10.00	-1.42
5230	2.25	-	-	-	-	8.75	10.00	-1.25

Table 240 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	94.0
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.27
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.17
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5190	3.43	3.20	-	-	6.33	7.83	-1.51
5230	3.56	3.36	-	-	6.47	7.83	-1.36

Table 241 - FCC Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	93.9
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.27
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.17
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ			
5190	-4.07	-4.04	-	-	-1.05	8.12	10.00	-1.88
5230	-3.69	-3.40	-	-	-0.53	8.64	10.00	-1.36

Table 242 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	90.1
Modulation Coding Scheme:	MCS10	DCCF (dB):	0.45
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.16
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5190	4.47	4.66	-	-	7.57	10.84	-3.26
5230	6.27	6.49	-	-	9.39	10.84	-1.44

Table 243 - FCC Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	90.1
Modulation Coding Scheme:	MCS10	DCCF (dB):	0.45
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.16
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ			
5190	-0.75	-1.09	-	-	2.10	8.26	10.00	-1.74
5230	-0.75	-0.73	-	-	2.27	8.44	10.00	-1.56

Table 244 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	89.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.51
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.50
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5210	0.54	-	-	-	-	10.50	-9.96

Table 245 - FCC Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	89.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.51
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.50
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ			
5210	-0.03	-	-	-	-	6.47	10.00	-3.53

Table 246 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	89.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.51
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.17
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5210	0.22	0.30	-	-	3.27	7.83	-4.56

Table 247 - FCC Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	88.9
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.51
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.17
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ			
5210	-5.74	-5.53	-	-	-2.62	6.55	10.00	-3.45

Table 248 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	84.0
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.75
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.16
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5210	-0.27	0.08	-	-	2.92	10.84	-7.91

Table 249 - FCC Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	84.0
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.76
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.16
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ			
5210	-2.90	-2.69	-	-	0.22	6.38	10.00	-3.62

Table 250 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	95.9
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.18
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.50
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5180	7.42	-	-	-	-	10.50	-3.08
5200	7.78	-	-	-	-	10.50	-2.72
5240	8.13	-	-	-	-	10.50	-2.37

Table 251 - FCC Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	95.9
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.18
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.50
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ			
5180	0.88	-	-	-	-	7.38	10.00	-2.62
5200	0.39	-	-	-	-	6.89	10.00	-3.11
5240	0.86	-	-	-	-	7.36	10.00	-2.64

Table 252 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	95.9
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.18
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.17
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5180	2.09	2.17	-	-	5.14	7.83	-2.69
5200	1.62	1.71	-	-	4.68	7.83	-3.16
5240	1.77	1.83	-	-	4.81	7.83	-3.02

Table 253 - FCC Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	95.8
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.19
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.17
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ			
5180	-5.01	-5.07	-	-	-2.03	7.14	10.00	-2.86
5200	-5.18	-5.44	-	-	-2.30	6.87	10.00	-3.13
5240	-5.25	-5.20	-	-	-2.21	6.95	10.00	-3.05

Table 254 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	95.8
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.18
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.16
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5180	5.29	5.04	-	-	8.18	10.84	-2.66
5200	4.75	4.78	-	-	7.78	10.84	-3.06
5240	5.04	5.44	-	-	8.25	10.84	-2.58

Table 255 - FCC Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	95.9
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.18
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.16
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ			
5180	-1.72	-2.00	-	-	1.15	7.32	10.00	-2.68
5200	-2.23	-2.30	-	-	0.75	6.91	10.00	-3.09
5240	-1.87	-1.97	-	-	1.09	7.25	10.00	-2.75

Table 256 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU26	Duty Cycle (%):	97.3
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.12
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.50
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5180 (RU26.0)	9.00	-	-	-	-	10.50	-1.50
5200 (RU26.0)	8.42	-	-	-	-	10.50	-2.08
5240 (RU26.8)	8.98	-	-	-	-	10.50	-1.52

Table 257 - FCC Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU26	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.11
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.50
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ			
5180 (RU26.0)	2.01	-	-	-	-	8.51	10.00	-1.49
5200 (RU26.0)	1.97	-	-	-	-	8.47	10.00	-1.53
5240 (RU26.8)	1.98	-	-	-	-	8.48	10.00	-1.52

Table 258 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU26	Duty Cycle (%):	97.6
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.11
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.17
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5180 (RU26.0)	2.77	3.09	-	-	5.94	7.83	-1.89
5200 (RU26.0)	2.55	2.91	-	-	5.75	7.83	-2.08
5240 (RU26.8)	2.83	3.23	-	-	6.05	7.83	-1.79

Table 259 - FCC Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU26	Duty Cycle (%):	97.6
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.11
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.17
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ			
5180 (RU26.0)	-4.36	-4.46	-	-	-1.40	7.77	10.00	-2.23
5200 (RU26.0)	-4.43	-4.66	-	-	-1.53	7.64	10.00	-2.36
5240 (RU26.8)	-3.82	-4.23	-	-	-1.01	8.16	10.00	-1.84

Table 260 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU26	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.12
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.16
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5180 (RU26.0)	6.09	5.95	-	-	9.03	10.84	-1.81
5200 (RU26.0)	5.93	6.07	-	-	9.01	10.84	-1.82
5240 (RU26.8)	5.94	6.02	-	-	8.99	10.84	-1.85

Table 261 - FCC Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU26	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.12
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.16
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ			
5180 (RU26.0)	-0.94	-1.23	-	-	1.93	8.10	10.00	-1.90
5200 (RU26.0)	-1.54	-1.18	-	-	1.65	7.81	10.00	-2.19
5240 (RU26.8)	-1.07	-0.89	-	-	2.03	8.19	10.00	-1.81

Table 262 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	97.2
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.12
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.50
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5180 (RU52.37)	9.12	-	-	-	-	10.50	-1.38
5200 (RU52.37)	9.15	-	-	-	-	10.50	-1.35
5240 (RU52.40)	9.84	-	-	-	-	10.50	-0.66

Table 263 - FCC Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	97.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.13
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.50
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ			
5180 (RU52.37)	1.96	-	-	-	-	8.46	10.00	-1.54
5200 (RU52.37)	1.50	-	-	-	-	8.00	10.00	-2.00
5240 (RU52.40)	1.97	-	-	-	-	8.47	10.00	-1.53

Table 264 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	97.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.13
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.17
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5180 (RU52.37)	3.39	3.19	-	-	6.30	7.83	-1.53
5200 (RU52.37)	2.77	3.03	-	-	5.92	7.83	-1.92
5240 (RU52.40)	2.98	3.08	-	-	6.04	7.83	-1.79

Table 265 - FCC Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	97.3
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.12
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.17
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ			
5180 (RU52.37)	-3.81	-3.88	-	-	-0.84	8.33	10.00	-1.67
5200 (RU52.37)	-3.93	-3.85	-	-	-0.88	8.29	10.00	-1.71
5240 (RU52.40)	-3.62	-3.57	-	-	-0.58	8.58	10.00	-1.42

Table 266 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	97.3
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.12
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.16
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5180 (RU52.37)	6.17	6.23	-	-	9.21	10.84	-1.63
5200 (RU52.37)	6.40	6.45	-	-	9.44	10.84	-1.40
5240 (RU52.40)	6.58	6.62	-	-	9.61	10.84	-1.23

Table 267 - FCC Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	97.5
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.11
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.16
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ			
5180 (RU52.37)	-0.54	-0.71	-	-	2.39	8.55	10.00	-1.45
5200 (RU52.37)	-0.92	-0.83	-	-	2.13	8.30	10.00	-1.70
5240 (RU52.40)	-0.85	-0.60	-	-	2.29	8.45	10.00	-1.55

Table 268 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	97.8
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.10
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.50
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5180 (RU106.53)	9.29	-	-	-	-	10.50	-1.21
5200 (RU106.53)	9.14	-	-	-	-	10.50	-1.36
5240 (RU106.54)	9.52	-	-	-	-	10.50	-0.98

Table 269 - FCC Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	98.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.09
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.50
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ			
5180 (RU106.53)	2.13	-	-	-	-	8.63	10.00	-1.37
5200 (RU106.53)	2.09	-	-	-	-	8.59	10.00	-1.41
5240 (RU106.54)	2.09	-	-	-	-	8.59	10.00	-1.41

Table 270 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	98.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.09
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.17
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5180 (RU106.53)	3.66	3.12	-	-	6.41	7.83	-1.42
5200 (RU106.53)	3.12	3.18	-	-	6.16	7.83	-1.67
5240 (RU106.54)	3.52	3.66	-	-	6.60	7.83	-1.23

Table 271 - FCC Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	97.9
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.09
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.17
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ			
5180 (RU106.53)	-3.25	-3.45	-	-	-0.34	8.83	10.00	-1.17
5200 (RU106.53)	-3.75	-3.66	-	-	-0.70	8.47	10.00	-1.53
5240 (RU106.54)	-3.29	-3.24	-	-	-0.25	8.91	10.00	-1.09

Table 272 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	97.9
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.09
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.16
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5180 (RU106.53)	6.32	6.62	-	-	9.48	10.84	-1.35
5200 (RU106.53)	6.14	5.92	-	-	9.04	10.84	-1.79
5240 (RU106.54)	6.50	6.36	-	-	9.44	10.84	-1.39

Table 273 - FCC Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	98.1
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.09
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.16
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ			
5180 (RU106.53)	-0.71	-0.80	-	-	2.25	8.42	10.00	-1.58
5200 (RU106.53)	-0.90	-1.03	-	-	2.05	8.21	10.00	-1.79
5240 (RU106.54)	-0.19	-0.48	-	-	2.68	8.84	10.00	-1.16

Table 274 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	93.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.31
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.50
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5190	3.60	-	-	-	-	10.50	-6.90
5230	6.68	-	-	-	-	10.50	-3.82

Table 275 - FCC Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	93.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.31
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.50
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ			
5190	0.88	-	-	-	-	7.38	10.00	-2.62
5230	0.82	-	-	-	-	7.32	10.00	-2.68

Table 276 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	93.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.31
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.17
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5190	1.69	1.46	-	-	4.58	7.83	-3.25
5230	2.00	1.84	-	-	4.93	7.83	-2.90

Table 277 - FCC Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	93.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.31
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.17
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ			
5190	-4.91	-5.04	-	-	-1.96	7.21	10.00	-2.79
5230	-4.77	-4.58	-	-	-1.66	7.50	10.00	-2.50

Table 278 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	93.1
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.31
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.16
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5190	2.25	2.33	-	-	5.30	10.84	-5.54
5230	4.73	5.04	-	-	7.90	10.84	-2.94

Table 279 - FCC Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	93.1
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.31
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.16
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ			
5190	-2.37	-2.22	-	-	0.71	6.88	10.00	-3.12
5230	-2.21	-1.97	-	-	0.92	7.09	10.00	-2.91

Table 280 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	88.5
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.53
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.50
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5210	-0.66	-	-	-	-	10.50	-11.16

Table 281 - FCC Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	88.5
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.53
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.50
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ			
5210	-0.78	-	-	-	-	5.72	10.00	-4.28

Table 282 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	88.5
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.53
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.17
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5210	-1.49	-1.62	-	-	1.45	7.83	-6.38

Table 283 - FCC Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	88.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.53
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.17
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ			
5210	-6.90	-6.55	-	-	-3.71	5.46	10.00	-4.54

Table 284 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	88.5
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.53
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.16
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5210	-1.36	-1.56	-	-	1.55	10.84	-9.29

Table 285 - FCC Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	88.5
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.53
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.16
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ			
5210	-4.11	-4.04	-	-	-1.06	5.10	10.00	-4.90

Table 286 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	93.4
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.30
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	9.17
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5180	1.71	2.47	-	-	5.12	7.83	-2.72
5200	1.86	2.50	-	-	5.20	7.83	-2.63
5240	1.56	2.46	-	-	5.04	7.83	-2.79

Table 287 - FCC Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	93.1
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.31
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	9.17
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ			
5180	-4.77	-4.73	-	-	-1.74	7.43	10.00	-2.57
5200	-5.02	-4.65	-	-	-1.82	7.35	10.00	-2.65
5240	-5.02	-4.66	-	-	-1.83	7.34	10.00	-2.66

Table 288 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	93.1
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.31
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	9.17
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5190	1.66	2.39	-	-	5.05	7.83	-2.78
5230	1.25	1.89	-	-	4.59	7.83	-3.24

Table 289 - FCC Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	92.8
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.33
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	9.17
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ			
5190	-5.39	-4.84	-	-	-2.09	7.07	10.00	-2.93
5230	-5.63	-5.14	-	-	-2.37	6.80	10.00	-3.20

Table 290 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	93.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.30
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	9.17
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5210	-2.36	-1.58	-	-	1.06	7.83	-6.78

Table 291 - FCC Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	93.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.31
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	9.17
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ			
5210	-7.35	-6.85	-	-	-4.08	5.08	10.00	-4.92

Table 292 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11a	Duty Cycle (%):	97.6
Data Rate:	12 Mbps	DCCF (dB):	0.10
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	7.90
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5260	8.37	-	-	-	-	9.10	-0.73
5280	8.66	-	-	-	-	9.10	-0.44
5320	8.30	-	-	-	-	9.10	-0.80

Table 293 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260	8.37	-	-	-	-	11.00	-2.63
5280	8.66	-	-	-	-	11.00	-2.34
5320	8.30	-	-	-	-	11.00	-2.70

Table 294 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	96.6
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.15
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	7.90
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5260	8.18	-	-	-	-	9.10	-0.92
5280	8.42	-	-	-	-	9.10	-0.68
5320	7.70	-	-	-	-	9.10	-1.40

Table 295 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260	8.18	-	-	-	-	11.00	-2.82
5280	8.42	-	-	-	-	11.00	-2.58
5320	7.70	-	-	-	-	11.00	-3.30

Table 296 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	96.9
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.14
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.54
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5260	3.11	3.28	-	-	6.21	7.46	-1.26
5280	3.46	3.29	-	-	6.38	7.46	-1.08
5320	3.25	3.02	-	-	6.15	7.46	-1.31

Table 297 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260	3.11	3.28	-	-	6.21	11.00	-4.79
5280	3.46	3.29	-	-	6.38	11.00	-4.62
5320	3.25	3.02	-	-	6.15	11.00	-4.85

Table 298 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	94.5
Modulation Coding Scheme:	MCS10	DCCF (dB):	0.24
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.65
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5260	6.43	6.27	-	-	9.36	10.35	-0.98
5280	6.51	6.38	-	-	9.46	10.35	-0.89
5320	6.15	6.29	-	-	9.23	10.35	-1.11

Table 299 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260	6.43	6.27	-	-	9.36	11.00	-1.64
5280	6.51	6.38	-	-	9.46	11.00	-1.54
5320	6.15	6.29	-	-	9.23	11.00	-1.77

Table 300 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	94.0
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.27
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	7.90
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5270	7.91	-	-	-	-	9.10	-1.19
5310	2.29	-	-	-	-	9.10	-6.81

Table 301 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5270	7.91	-	-	-	-	11.00	-3.09
5310	2.29	-	-	-	-	11.00	-8.71

Table 302 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	94.0
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.27
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.54
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5270	3.14	2.66	-	-	5.92	7.46	-1.54
5310	2.13	2.13	-	-	5.14	7.46	-2.32

Table 303 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5270	3.14	2.66	-	-	5.92	11.00	-5.08
5310	2.13	2.13	-	-	5.14	11.00	-5.86

Table 304 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	90.1
Modulation Coding Scheme:	MCS10	DCCF (dB):	0.45
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.65
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5270	5.95	5.88	-	-	8.93	10.35	-1.42
5310	2.12	1.99	-	-	5.07	10.35	-5.28

Table 305 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5270	5.95	5.88	-	-	8.93	11.00	-2.07
5310	2.12	1.99	-	-	5.07	11.00	-5.93

Table 306 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	89.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.51
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	7.90
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5290	-1.87	-	-	-	-	9.10	-10.97

Table 307 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5290	-1.87	-	-	-	-	11.00	-12.87

Table 308 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	89.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.51
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.54
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5290	-2.68	-2.27	-	-	0.54	7.46	-6.92

Table 309 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5290	-2.68	-2.27	-	-	0.54	11.00	-10.46

Table 310 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	84.0
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.76
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.65
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5290	-2.81	-2.15	-	-	0.55	10.35	-9.80

Table 311 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5290	-2.81	-2.15	-	-	0.55	11.00	-10.45

Table 312 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	95.9
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.18
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	7.90
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5260	6.53	-	-	-	-	9.10	-2.57
5280	6.67	-	-	-	-	9.10	-2.43
5320	6.22	-	-	-	-	9.10	-2.88

Table 313 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260	6.53	-	-	-	-	11.00	-4.47
5280	6.67	-	-	-	-	11.00	-4.33
5320	6.22	-	-	-	-	11.00	-4.78

Table 314 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	96.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.17
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.54
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5260	1.84	1.65	-	-	4.76	7.46	-2.71
5280	1.77	1.68	-	-	4.73	7.46	-2.73
5320	1.14	0.95	-	-	4.06	7.46	-3.41

Table 315 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260	1.84	1.65	-	-	4.76	11.00	-6.24
5280	1.77	1.68	-	-	4.73	11.00	-6.27
5320	1.14	0.95	-	-	4.06	11.00	-6.94

Table 316 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	95.8
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.18
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.65
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5260	4.81	4.66	-	-	7.75	10.35	-2.60
5280	4.74	4.67	-	-	7.72	10.35	-2.63
5320	4.42	4.30	-	-	7.37	10.35	-2.97

Table 317 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260	4.81	4.66	-	-	7.75	11.00	-3.25
5280	4.74	4.67	-	-	7.72	11.00	-3.28
5320	4.42	4.30	-	-	7.37	11.00	-3.63

Table 318 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	97.3
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.12
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	7.90
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5260 (RU52.37)	7.89	-	-	-	-	9.10	-1.21
5280 (RU52.37)	7.75	-	-	-	-	9.10	-1.35
5320 (RU52.40)	7.17	-	-	-	-	9.10	-1.93

Table 319 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260 (RU52.37)	7.89	-	-	-	-	11.00	-3.11
5280 (RU52.37)	7.75	-	-	-	-	11.00	-3.25
5320 (RU52.40)	7.17	-	-	-	-	11.00	-3.83

Table 320 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	97.2
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.12
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.54
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5260 (RU52.37)	3.02	2.84	-	-	5.94	7.46	-1.52
5280 (RU52.37)	2.90	2.81	-	-	5.86	7.46	-1.60
5320 (RU52.40)	2.71	2.44	-	-	5.58	7.46	-1.88

Table 321 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260 (RU52.37)	3.02	2.84	-	-	5.94	11.00	-5.06
5280 (RU52.37)	2.90	2.81	-	-	5.86	11.00	-5.14
5320 (RU52.40)	2.71	2.44	-	-	5.58	11.00	-5.42

Table 322 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.12
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.65
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5260 (RU52.37)	5.83	5.66	-	-	8.76	10.35	-1.59
5280 (RU52.37)	5.97	6.16	-	-	9.08	10.35	-1.27
5320 (RU52.40)	5.75	5.55	-	-	8.66	10.35	-1.69

Table 323 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260 (RU52.37)	5.83	5.66	-	-	8.76	11.00	-2.24
5280 (RU52.37)	5.97	6.16	-	-	9.08	11.00	-1.92
5320 (RU52.40)	5.75	5.55	-	-	8.66	11.00	-2.34

Table 324 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	98.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.09
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	7.90
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5260 (RU106.53)	8.22	-	-	-	-	9.10	-0.88
5280 (RU106.53)	8.00	-	-	-	-	9.10	-1.10
5320 (RU106.54)	7.31	-	-	-	-	9.10	-1.79

Table 325 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260 (RU106.53)	8.22	-	-	-	-	11.00	-2.78
5280 (RU106.53)	8.00	-	-	-	-	11.00	-3.00
5320 (RU106.54)	7.31	-	-	-	-	11.00	-3.69

Table 326 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	98.2
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.08
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.54
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5260 (RU106.53)	2.95	2.88	-	-	5.93	7.46	-1.53
5280 (RU106.53)	2.97	2.78	-	-	5.88	7.46	-1.58
5320 (RU106.54)	2.36	2.74	-	-	5.56	7.46	-1.90

Table 327 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260 (RU106.53)	2.95	2.88	-	-	5.93	11.00	-5.07
5280 (RU106.53)	2.97	2.78	-	-	5.88	11.00	-5.12
5320 (RU106.54)	2.36	2.74	-	-	5.56	11.00	-5.44

Table 328 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	97.9
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.09
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.65
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5260 (RU106.53)	6.07	6.28	-	-	9.19	10.35	-1.16
5280 (RU106.53)	6.04	6.10	-	-	9.08	10.35	-1.26
5320 (RU106.54)	5.55	5.57	-	-	8.57	10.35	-1.78

Table 329 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260 (RU106.53)	6.07	6.28	-	-	9.19	11.00	-1.81
5280 (RU106.53)	6.04	6.10	-	-	9.08	11.00	-1.92
5320 (RU106.54)	5.55	5.57	-	-	8.57	11.00	-2.43

Table 330 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	93.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.31
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	7.90
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5270	6.16	-	-	-	-	9.10	-2.94
5310	0.28	-	-	-	-	9.10	-8.82

Table 331 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5270	6.16	-	-	-	-	11.00	-4.84
5310	0.28	-	-	-	-	11.00	-10.72

Table 332 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	93.3
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.30
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.54
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5270	1.39	1.34	-	-	4.38	7.46	-3.08
5310	-0.29	-0.64	-	-	2.55	7.46	-4.92

Table 333 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5270	1.39	1.34	-	-	4.38	11.00	-6.62
5310	-0.29	-0.64	-	-	2.55	11.00	-8.45

Table 334 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	93.1
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.31
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.65
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5270	4.42	4.09	-	-	7.27	10.35	-3.08
5310	-0.07	-0.22	-	-	2.87	10.35	-7.48

Table 335 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5270	4.42	4.09	-	-	7.27	11.00	-3.73
5310	-0.07	-0.22	-	-	2.87	11.00	-8.13

Table 336 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	88.5
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.53
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	7.90
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5290	-4.07	-	-	-	-	9.10	-13.17

Table 337 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5290	-4.07	-	-	-	-	11.00	-15.07

Table 338 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	88.5
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.53
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.54
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5290	-4.14	-4.07	-	-	-1.10	7.46	-8.56

Table 339 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5290	-4.14	-4.07	-	-	-1.10	11.00	-12.10

Table 340 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	88.4
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.53
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.65
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5290	-4.20	-4.09	-	-	-1.13	10.35	-11.48

Table 341 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5290	-4.20	-4.09	-	-	-1.13	11.00	-12.13

Table 342 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	93.5
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.29
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	9.54
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5260	1.22	2.01	-	-	4.64	7.46	-2.82
5280	1.28	1.72	-	-	4.52	7.46	-2.94
5320	1.58	2.44	-	-	5.04	7.46	-2.42

Table 343 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260	1.22	2.01	-	-	4.64	11.00	-6.36
5280	1.28	1.72	-	-	4.52	11.00	-6.48
5320	1.58	2.44	-	-	5.04	11.00	-5.96

Table 344 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	92.5
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.34
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	9.54
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5270	1.18	1.81	-	-	4.51	7.46	-2.95
5310	0.15	1.19	-	-	3.71	7.46	-3.75

Table 345 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5270	1.18	1.81	-	-	4.51	11.00	-6.49
5310	0.15	1.19	-	-	3.71	11.00	-7.29

Table 346 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	93.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.29
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	9.54
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5290	-4.50	-3.51	-	-	-0.97	7.46	-8.43

Table 347 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5290	-4.50	-3.51	-	-	-0.97	11.00	-11.97

Table 348 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11a	Duty Cycle (%):	97.6
Data Rate:	12 Mbps	DCCF (dB):	0.10
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5500	9.38	-	-	-	-	10.60	-1.22
5580	9.63	-	-	-	-	10.60	-0.97
5700	8.88	-	-	-	-	10.60	-1.72
5720	9.72	-	-	-	-	10.60	-0.88

Table 349 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500	9.38	-	-	-	-	11.00	-1.62
5580	9.63	-	-	-	-	11.00	-1.37
5700	8.88	-	-	-	-	11.00	-2.12
5720	9.72	-	-	-	-	11.00	-1.28

Table 350 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	96.6
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.15
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5500	9.15	-	-	-	-	10.60	-1.45
5580	9.31	-	-	-	-	10.60	-1.29
5700	7.06	-	-	-	-	10.60	-3.54
5720	9.56	-	-	-	-	10.60	-1.04

Table 351 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500	9.15	-	-	-	-	11.00	-1.85
5580	9.31	-	-	-	-	11.00	-1.69
5700	7.06	-	-	-	-	11.00	-3.94
5720	9.56	-	-	-	-	11.00	-1.44

Table 352 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	96.9
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.14
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.69
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5500	3.91	3.82	-	-	6.87	8.31	-1.43
5580	4.08	3.79	-	-	6.94	8.31	-1.36
5700	4.21	4.23	-	-	7.23	8.31	-1.08
5720	4.25	4.14	-	-	7.21	8.31	-1.10

Table 353 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500	3.91	3.82	-	-	6.87	11.00	-4.13
5580	4.08	3.79	-	-	6.94	11.00	-4.06
5700	4.21	4.23	-	-	7.23	11.00	-3.77
5720	4.25	4.14	-	-	7.21	11.00	-3.79

Table 354 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	94.2
Modulation Coding Scheme:	MCS10	DCCF (dB):	0.26
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.71
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5500	6.78	6.87	-	-	9.83	11.00	-1.17
5580	6.83	7.06	-	-	9.96	11.00	-1.04
5700	6.67	6.56	-	-	9.62	11.00	-1.38
5720	6.80	6.80	-	-	9.81	11.00	-1.19

Table 355 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	94.0
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.27
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5510	5.49	-	-	-	-	10.60	-5.11
5550	8.50	-	-	-	-	10.60	-2.10
5670	8.32	-	-	-	-	10.60	-2.28
5710	8.13	-	-	-	-	10.60	-2.47

Table 356 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5510	5.49	-	-	-	-	11.00	-5.51
5550	8.50	-	-	-	-	11.00	-2.50
5670	8.32	-	-	-	-	11.00	-2.68
5710	8.13	-	-	-	-	11.00	-2.87

Table 357 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	94.0
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.27
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.69
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5510	3.50	3.34	-	-	6.43	8.31	-1.88
5550	3.74	3.57	-	-	6.67	8.31	-1.64
5670	3.56	3.70	-	-	6.64	8.31	-1.66
5710	3.38	3.79	-	-	6.60	8.31	-1.71

Table 358 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5510	3.50	3.34	-	-	6.43	11.00	-4.57
5550	3.74	3.57	-	-	6.67	11.00	-4.33
5670	3.56	3.70	-	-	6.64	11.00	-4.36
5710	3.38	3.79	-	-	6.60	11.00	-4.40

Table 359 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	90.1
Modulation Coding Scheme:	MCS10	DCCF (dB):	0.45
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.71
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5510	5.46	5.50	-	-	8.49	11.00	-2.51
5550	6.82	6.63	-	-	9.73	11.00	-1.27
5670	6.42	6.69	-	-	9.57	11.00	-1.43
5710	6.08	6.41	-	-	9.26	11.00	-1.74

Table 360 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	89.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.51
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5530	1.18	-	-	-	-	10.60	-9.42
5610	5.47	-	-	-	-	10.60	-5.13
5690	5.52	-	-	-	-	10.60	-5.08

Table 361 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5530	1.18	-	-	-	-	11.00	-9.82
5610	5.47	-	-	-	-	11.00	-5.53
5690	5.52	-	-	-	-	11.00	-5.48

Table 362 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	89.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.51
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.69
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5530	-0.12	0.08	-	-	2.99	8.31	-5.32
5610	1.90	1.93	-	-	4.92	8.31	-3.38
5690	1.71	1.70	-	-	4.72	8.31	-3.59

Table 363 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5530	-0.12	0.08	-	-	2.99	11.00	-8.01
5610	1.90	1.93	-	-	4.92	11.00	-6.08
5690	1.71	1.70	-	-	4.72	11.00	-6.28

Table 364 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	84.1
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.75
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.71
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5530	0.32	0.41	-	-	3.38	11.00	-7.62
5610	4.72	4.53	-	-	7.63	11.00	-3.37
5690	4.80	4.52	-	-	7.67	11.00	-3.33

Table 365 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	95.8
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.18
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5500	7.91	-	-	-	-	10.60	-2.69
5580	7.96	-	-	-	-	10.60	-2.64
5700	2.91	-	-	-	-	10.60	-7.69
5720	7.69	-	-	-	-	10.60	-2.91

Table 366 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500	7.91	-	-	-	-	11.00	-3.09
5580	7.96	-	-	-	-	11.00	-3.04
5700	2.91	-	-	-	-	11.00	-8.09
5720	7.69	-	-	-	-	11.00	-3.31

Table 367 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	96.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.17
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.69
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5500	2.06	2.00	-	-	5.04	8.31	-3.27
5580	2.47	2.49	-	-	5.49	8.31	-2.82
5700	2.07	2.12	-	-	5.11	8.31	-3.20
5720	2.46	2.56	-	-	5.52	8.31	-2.79

Table 368 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500	2.06	2.00	-	-	5.04	11.00	-5.96
5580	2.47	2.49	-	-	5.49	11.00	-5.51
5700	2.07	2.12	-	-	5.11	11.00	-5.89
5720	2.46	2.56	-	-	5.52	11.00	-5.48

Table 369 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	95.8
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.18
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.71
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5500	4.87	4.56	-	-	7.73	11.00	-3.27
5580	5.13	4.85	-	-	8.00	11.00	-3.00
5700	2.53	2.65	-	-	5.60	11.00	-5.40
5720	4.95	5.00	-	-	7.99	11.00	-3.01

Table 370 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	97.3
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.12
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5500 (RU52.37)	8.77	-	-	-	-	10.60	-1.83
5580 (RU52.37)	8.96	-	-	-	-	10.60	-1.64
5700 (RU52.40)	8.57	-	-	-	-	10.60	-2.03
5720 (RU52.40)	-0.99	-	-	-	-	10.60	-11.59

Table 371 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500 (RU52.37)	8.77	-	-	-	-	11.00	-2.23
5580 (RU52.37)	8.96	-	-	-	-	11.00	-2.04
5700 (RU52.40)	8.57	-	-	-	-	11.00	-2.43
5720 (RU52.40)	-0.99	-	-	-	-	11.00	-11.99

Table 372 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	97.2
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.12
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.69
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5500 (RU52.37)	3.63	3.71	-	-	6.68	8.31	-1.63
5580 (RU52.37)	3.66	3.98	-	-	6.83	8.31	-1.48
5700 (RU52.40)	3.71	3.60	-	-	6.66	8.31	-1.64
5720 (RU52.40)	-5.65	-6.17	-	-	-2.89	8.31	-11.20

Table 373 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500 (RU52.37)	3.63	3.71	-	-	6.68	11.00	-4.32
5580 (RU52.37)	3.66	3.98	-	-	6.83	11.00	-4.17
5700 (RU52.40)	3.71	3.60	-	-	6.66	11.00	-4.34
5720 (RU52.40)	-5.65	-6.17	-	-	-2.89	11.00	-13.89

Table 374 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	97.3
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.12
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.71
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5500 (RU52.37)	6.33	6.51	-	-	9.43	11.00	-1.57
5580 (RU52.37)	6.40	6.51	-	-	9.47	11.00	-1.53
5700 (RU52.40)	6.90	6.31	-	-	9.63	11.00	-1.37
5720 (RU52.40)	-2.80	-3.45	-	-	-0.10	11.00	-11.10

Table 375 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	97.9
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.09
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5500 (RU106.53)	8.99	-	-	-	-	10.60	-1.61
5580 (RU106.53)	8.74	-	-	-	-	10.60	-1.86
5700 (RU106.54)	8.55	-	-	-	-	10.60	-2.05
5720 (RU106.54)	9.19	-	-	-	-	10.60	-1.41

Table 376 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500 (RU106.53)	8.99	-	-	-	-	11.00	-2.01
5580 (RU106.53)	8.74	-	-	-	-	11.00	-2.26
5700 (RU106.54)	8.55	-	-	-	-	11.00	-2.45
5720 (RU106.54)	9.19	-	-	-	-	11.00	-1.81

Table 377 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	97.9
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.09
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.69
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5500 (RU106.53)	3.66	3.07	-	-	6.38	8.31	-1.92
5580 (RU106.53)	3.63	4.12	-	-	6.89	8.31	-1.41
5700 (RU106.54)	3.64	3.79	-	-	6.73	8.31	-1.58
5720 (RU106.54)	4.14	3.39	-	-	6.80	8.31	-1.51

Table 378 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500 (RU106.53)	3.66	3.07	-	-	6.38	11.00	-4.62
5580 (RU106.53)	3.63	4.12	-	-	6.89	11.00	-4.11
5700 (RU106.54)	3.64	3.79	-	-	6.73	11.00	-4.27
5720 (RU106.54)	4.14	3.39	-	-	6.80	11.00	-4.20

Table 379 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	97.8
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.10
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.71
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5500 (RU106.53)	6.80	6.71	-	-	9.76	11.00	-1.24
5580 (RU106.53)	6.58	6.37	-	-	9.49	11.00	-1.51
5700 (RU106.54)	6.65	6.54	-	-	9.61	11.00	-1.39
5720 (RU106.54)	6.55	6.55	-	-	9.56	11.00	-1.44

Table 380 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	93.2
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.31
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5510	3.44	-	-	-	-	10.60	-7.16
5550	6.66	-	-	-	-	10.60	-3.94
5670	4.96	-	-	-	-	10.60	-5.64
5710	6.72	-	-	-	-	10.60	-3.88

Table 381 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5510	3.44	-	-	-	-	11.00	-7.56
5550	6.66	-	-	-	-	11.00	-4.34
5670	4.96	-	-	-	-	11.00	-6.04
5710	6.72	-	-	-	-	11.00	-4.28

Table 382 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	93.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.31
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.69
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5510	2.13	2.12	-	-	5.14	8.31	-3.17
5550	2.08	1.77	-	-	4.94	8.31	-3.37
5670	2.13	2.14	-	-	5.14	8.31	-3.17
5710	1.93	1.99	-	-	4.97	8.31	-3.34

Table 383 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5510	2.13	2.12	-	-	5.14	11.00	-5.86
5550	2.08	1.77	-	-	4.94	11.00	-6.06
5670	2.13	2.14	-	-	5.14	11.00	-5.86
5710	1.93	1.99	-	-	4.97	11.00	-6.03

Table 384 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	93.1
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.31
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.71
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5510	3.22	2.78	-	-	6.02	11.00	-4.98
5550	5.15	5.07	-	-	8.12	11.00	-2.88
5670	4.17	4.54	-	-	7.37	11.00	-3.63
5710	4.65	4.99	-	-	7.83	11.00	-3.17

Table 385 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	88.5
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.53
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5530	0.50	-	-	-	-	10.60	-10.10
5690	4.65	-	-	-	-	10.60	-5.95

Table 386 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5530	0.50	-	-	-	-	11.00	-10.50
5690	4.65	-	-	-	-	11.00	-6.35

Table 387 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	88.5
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.53
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.69
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5530	-0.93	-0.98	-	-	2.05	8.31	-6.26
5690	0.61	0.59	-	-	3.61	8.31	-4.70

Table 388 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5530	-0.93	-0.98	-	-	2.05	11.00	-8.95
5690	0.61	0.59	-	-	3.61	11.00	-7.39

Table 389 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	88.5
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.53
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.71
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5530	-0.72	-0.72	-	-	2.29	11.00	-8.71
5690	3.32	3.02	-	-	6.18	11.00	-4.82

Table 390 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	93.3
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.30
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.69
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5500	2.24	3.37	-	-	5.85	8.31	-2.46
5580	2.42	3.62	-	-	6.07	8.31	-2.24
5700	1.70	3.10	-	-	5.46	8.31	-2.84
5720	1.78	3.11	-	-	5.50	8.31	-2.81

Table 391 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500	2.24	3.37	-	-	5.85	11.00	-5.15
5580	2.42	3.62	-	-	6.07	11.00	-4.93
5700	1.70	3.10	-	-	5.46	11.00	-5.54
5720	1.78	3.11	-	-	5.50	11.00	-5.50

Table 392 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	93.0
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.32
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.69
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5510	0.60	1.31	-	-	3.98	8.31	-4.33
5550	2.25	3.33	-	-	5.83	8.31	-2.47
5670	1.24	2.85	-	-	5.13	8.31	-3.18
5710	1.71	2.92	-	-	5.36	8.31	-2.94

Table 393 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5510	0.60	1.31	-	-	3.98	11.00	-7.02
5550	2.25	3.33	-	-	5.83	11.00	-5.17
5670	1.24	2.85	-	-	5.13	11.00	-5.87
5710	1.71	2.92	-	-	5.36	11.00	-5.64

Table 394 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	92.9
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.32
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.69
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm / MHz)	Margin (dB)
	A	B	C	D	Σ		
5530	-3.41	-2.52	-	-	0.06	8.31	-8.24
5610	-0.58	0.32	-	-	2.91	8.31	-5.40
5690	-0.28	0.44	-	-	3.11	8.31	-5.20

Table 395 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5530	-3.41	-2.52	-	-	0.06	11.00	-10.94
5610	-0.58	0.32	-	-	2.91	11.00	-8.09
5690	-0.28	0.44	-	-	3.11	11.00	-7.89

Table 396 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11a	Duty Cycle (%):	97.8
Data Rate:	12 Mbps	DCCF (dB):	0.10
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm / 500 kHz)	Margin (dB)
	A	B	C	D	Σ		
5720	4.42	-	-	-	-	29.60	-25.18

Table 397 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11a	Duty Cycle (%):	97.8
Data Rate:	12 Mbps	DCCF (dB):	0.10
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.40
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm / 500 kHz)	Margin (dB)
	A	B	C	D	Σ		
5745	-	8.62	-	-	-	29.60	-20.98
5785	-	8.40	-	-	-	29.60	-21.20
5825	-	8.37	-	-	-	29.60	-21.23

Table 398 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	96.9
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.14
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm / 500 kHz)	Margin (dB)
	A	B	C	D	Σ		
5720	4.37	-	-	-	-	29.60	-25.23

Table 399 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	96.8
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.14
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.40
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm / 500 kHz)	Margin (dB)
	A	B	C	D	Σ		
5745	-	8.61	-	-	-	29.60	-20.99
5785	-	8.08	-	-	-	29.60	-21.52
5825	-	8.54	-	-	-	29.60	-21.06

Table 400 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	96.8
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.14
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.41
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm / 500 kHz)	Margin (dB)
	A	B	C	D	Σ		
5720	-0.99	-0.74	-	-	2.15	26.59	-24.44
5745	8.33	8.47	-	-	11.41	26.84	-15.43
5785	8.29	8.37	-	-	11.34	26.84	-15.50
5825	8.18	8.56	-	-	11.38	26.84	-15.45

Table 401 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	94.6
Modulation Coding Scheme:	MCS10	DCCF (dB):	0.24
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm / 500 kHz)	Margin (dB)
	A	B	C	D	Σ		
5720	1.94	2.15	-	-	5.06	29.60	-24.54
5745	8.42	8.26	-	-	11.35	29.84	-18.49
5785	8.31	8.21	-	-	11.27	29.84	-18.57
5825	8.22	8.54	-	-	11.39	29.84	-18.45

Table 402 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	94.2
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.26
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm / 500 kHz)	Margin (dB)
	A	B	C	D	Σ		
5710	2.40	-	-	-	-	29.60	-27.20

Table 403 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	94.2
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.26
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.40
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm / 500 kHz)	Margin (dB)
	A	B	C	D	Σ		
5755	-	5.39	-	-	-	29.60	-24.21
5795	-	5.37	-	-	-	29.60	-24.23

Table 404 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	94.1
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.26
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.41
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm / 500 kHz)	Margin (dB)
	A	B	C	D	Σ		
5710	-2.78	-2.36	-	-	0.44	26.59	-26.15
5755	5.63	5.12	-	-	8.39	26.84	-18.44
5795	5.66	5.25	-	-	8.47	26.84	-18.37

Table 405 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	90.4
Modulation Coding Scheme:	MCS10	DCCF (dB):	0.44
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm / 500 kHz)	Margin (dB)
	A	B	C	D	Σ		
5710	-0.08	0.40	-	-	3.18	29.60	-26.42
5755	5.65	5.30	-	-	8.49	29.84	-21.36
5795	5.54	5.58	-	-	8.57	29.84	-21.27

Table 406 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	89.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.47
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm / 500 kHz)	Margin (dB)
	A	B	C	D	Σ		
5690	-1.79	-	-	-	-	29.60	-31.39

Table 407 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	89.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.47
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.40
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm / 500 kHz)	Margin (dB)
	A	B	C	D	Σ		
5775	-	3.13	-	-	-	29.60	-26.47

Table 408 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	89.6
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.47
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.41
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm / 500 kHz)	Margin (dB)
	A	B	C	D	Σ		
5690	-5.04	-5.61	-	-	-2.31	26.59	-28.90
5775	1.72	1.53	-	-	4.64	26.84	-22.20

Table 409 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	85.0
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.70
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm / 500 kHz)	Margin (dB)
	A	B	C	D	Σ		
5690	-1.84	-1.83	-	-	1.18	29.60	-28.42
5775	2.05	2.32	-	-	5.20	29.84	-24.65

Table 410 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	96.5
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.15
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm / 500 kHz)	Margin (dB)
	A	B	C	D	Σ		
5720	4.63	-	-	-	-	29.60	-24.97

Table 411 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	96.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.17
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.40
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm / 500 kHz)	Margin (dB)
	A	B	C	D	Σ		
5745	-	7.22	-	-	-	29.60	-22.38
5785	-	6.65	-	-	-	29.60	-22.95
5825	-	6.66	-	-	-	29.60	-22.94

Table 412 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	96.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.17
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.41
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm / 500 kHz)	Margin (dB)
	A	B	C	D	Σ		
5720	-0.79	-0.64	-	-	2.30	26.59	-24.29
5745	7.03	7.15	-	-	10.10	26.84	-16.74
5785	6.86	6.90	-	-	9.89	26.84	-16.95
5825	6.51	6.67	-	-	9.60	26.84	-17.24

Table 413 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	96.1
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.17
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm / 500 kHz)	Margin (dB)
	A	B	C	D	Σ		
5720	1.92	1.88	-	-	4.91	29.60	-24.69
5745	6.80	6.71	-	-	9.76	29.84	-20.08
5785	6.80	6.67	-	-	9.74	29.84	-20.10
5825	6.45	6.56	-	-	9.52	29.84	-20.33

Table 414 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU26	Duty Cycle (%):	97.5
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.11
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.40
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm / 500 kHz)	Margin (dB)
	A	B	C	D	Σ		
5745 (RU26.0)	-	7.79	-	-	-	29.60	-21.81
5785 (RU26.0)	-	7.73	-	-	-	29.60	-21.87
5825 (RU26.8)	-	8.31	-	-	-	29.60	-21.29

Table 415 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU26	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.11
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.16
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm / 500 kHz)	Margin (dB)
	A	B	C	D	Σ		
5745 (RU26.0)	7.80	8.17	-	-	11.00	26.84	-15.84
5785 (RU26.0)	7.95	7.59	-	-	10.78	26.84	-16.05
5825 (RU26.8)	7.81	7.96	-	-	10.90	26.84	-15.94

Table 416 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU26	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.11
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.16
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm / 500 kHz)	Margin (dB)
	A	B	C	D	Σ		
5745 (RU26.0)	8.00	8.35	-	-	11.19	29.84	-18.66
5785 (RU26.0)	7.96	8.11	-	-	11.04	29.84	-18.80
5825 (RU26.8)	8.01	7.94	-	-	10.98	29.84	-18.86

Table 417 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	97.3
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.12
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm / 500 kHz)	Margin (dB)
	A	B	C	D	Σ		
5720 (RU52.40)	5.51	-	-	-	-	29.60	-24.09

Table 418 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	97.2
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.12
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.40
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm / 500 kHz)	Margin (dB)
	A	B	C	D	Σ		
5745 (RU52.37)	-	8.41	-	-	-	29.60	-21.19
5785 (RU52.37)	-	7.93	-	-	-	29.60	-21.67
5825 (RU52.40)	-	8.23	-	-	-	29.60	-21.37

Table 419 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	97.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.12
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.41
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm / 500 kHz)	Margin (dB)
	A	B	C	D	Σ		
5720 (RU52.40)	0.77	0.40	-	-	3.60	26.59	-22.99
5745 (RU52.37)	8.32	8.26	-	-	11.30	26.84	-15.54
5785 (RU52.37)	7.73	8.14	-	-	10.95	26.84	-15.88
5825 (RU52.40)	7.92	8.17	-	-	11.05	26.84	-15.78

Table 420 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	97.3
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.12
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm / 500 kHz)	Margin (dB)
	A	B	C	D	Σ		
5720 (RU52.40)	3.95	3.36	-	-	6.68	29.60	-22.92
5745 (RU52.37)	7.97	7.97	-	-	10.98	29.84	-18.86
5785 (RU52.37)	7.55	7.71	-	-	10.64	29.84	-19.21
5825 (RU52.40)	8.16	8.54	-	-	11.36	29.84	-18.48

Table 421 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	97.9
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.09
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm / 500 kHz)	Margin (dB)
	A	B	C	D	Σ		
5720 (RU106.54)	6.11	-	-	-	-	29.60	-23.49

Table 422 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	97.9
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.09
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.40
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm / 500 kHz)	Margin (dB)
	A	B	C	D	Σ		
5745 (RU106.53)	-	8.52	-	-	-	29.60	-21.08
5785 (RU106.53)	-	8.19	-	-	-	29.60	-21.41
5825 (RU106.54)	-	8.32	-	-	-	29.60	-21.28

Table 423 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	97.9
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.09
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.41
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm / 500 kHz)	Margin (dB)
	A	B	C	D	Σ		
5720 (RU106.54)	1.09	0.44	-	-	3.79	26.59	-22.80
5745 (RU106.53)	8.34	8.21	-	-	11.29	26.84	-15.55
5785 (RU106.53)	7.96	8.28	-	-	11.13	26.84	-15.70
5825 (RU106.54)	8.06	8.30	-	-	11.19	26.84	-15.64

Table 424 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	98.0
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.09
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm / 500 kHz)	Margin (dB)
	A	B	C	D	Σ		
5720 (RU106.54)	3.93	3.45	-	-	6.70	29.60	-22.90
5745 (RU106.53)	8.45	8.01	-	-	11.24	29.84	-18.60
5785 (RU106.53)	7.80	7.87	-	-	10.84	29.84	-19.00
5825 (RU106.54)	7.83	8.22	-	-	11.04	29.84	-18.80

Table 425 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	93.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.30
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm / 500 kHz)	Margin (dB)
	A	B	C	D	Σ		
5710	3.22	-	-	-	-	29.60	-26.38

Table 426 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	93.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.30
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.40
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm / 500 kHz)	Margin (dB)
	A	B	C	D	Σ		
5755	-	4.25	-	-	-	29.60	-25.35
5795	-	4.21	-	-	-	29.60	-25.39

Table 427 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	93.3
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.30
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.41
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm / 500 kHz)	Margin (dB)
	A	B	C	D	Σ		
5710	-1.22	-1.66	-	-	1.57	26.59	-25.02
5755	4.42	4.41	-	-	7.42	26.84	-19.41
5795	4.31	4.15	-	-	7.24	26.84	-19.60

Table 428 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	93.3
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.30
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm / 500 kHz)	Margin (dB)
	A	B	C	D	Σ		
5710	1.07	1.27	-	-	4.18	29.60	-25.42
5755	4.12	4.15	-	-	7.14	29.84	-22.70
5795	4.27	4.14	-	-	7.22	29.84	-22.63

Table 429 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	89.3
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.49
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm / 500 kHz)	Margin (dB)
	A	B	C	D	Σ		
5690	-0.31	-	-	-	-	29.60	-29.91

Table 430 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	89.3
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.49
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.40
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm / 500 kHz)	Margin (dB)
	A	B	C	D	Σ		
5775	-	1.55	-	-	-	29.60	-28.05

Table 431 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	89.2
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.50
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	9.41
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm / 500 kHz)	Margin (dB)
	A	B	C	D	Σ		
5690	-3.94	-4.15	-	-	-1.03	26.59	-27.62
5775	0.61	1.28	-	-	3.96	26.84	-22.87

Table 432 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	89.2
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.50
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	6.40
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm / 500 kHz)	Margin (dB)
	A	B	C	D	Σ		
5690	-1.68	-1.98	-	-	1.18	29.60	-28.42
5775	1.09	1.06	-	-	4.09	29.84	-25.76

Table 433 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	93.6
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.29
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	9.41
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm / 500 kHz)	Margin (dB)
	A	B	C	D	Σ		
5720	-3.02	-2.41	-	-	0.31	26.59	-26.28
5745	6.21	7.59	-	-	9.97	26.84	-16.87
5785	6.06	7.30	-	-	9.74	26.84	-17.10
5825	5.79	7.16	-	-	9.54	26.84	-17.30

Table 434 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	93.4
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.30
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	9.41
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm / 500 kHz)	Margin (dB)
	A	B	C	D	Σ		
5710	-4.66	-3.28	-	-	-0.90	26.59	-27.49
5755	3.19	4.51	-	-	6.91	26.84	-19.93
5795	3.57	4.46	-	-	7.05	26.84	-19.79

Table 435 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	93.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.31
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	9.41
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm / 500 kHz)	Margin (dB)
	A	B	C	D	Σ		
5690	-8.12	-6.67	-	-	-4.32	26.59	-30.91
5775	-2.71	-1.59	-	-	0.90	26.84	-25.94

Table 436 - Maximum Power Spectral Density Results

FCC 47 CFR Part 15E, Limit Clause 15.407(a)

Condition of Operation	Frequency Range (MHz)			
	5150-5250	5250-5350	5470-5725	5725-5850
Max Conducted Power Spectral Density	17 dBm/MHz for master device 11 dBm/MHz for mobile/portable client device	11 dBm/MHz		30 dBm/500 kHz

Table 437

ISED RSS-247, Limit Clause 6.2.1.1, 6.2.2.1, 6.2.3.1 and 6.2.4.1

Device	Frequency Range (MHz)			
	5150-5250	5250-5350	5470-5725	5725-5850
OEM installed in vehicles	-	-	-	-
Other	≤10 dBm/MHz EIRP	≤11 dBm/MHz	≤11 dBm/MHz	≤30 dBm/500kHz

Table 438



2.3.7 Test Location and Test Equipment Used

This test was carried out in RF Laboratory 1.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Expires
Rubidium Standard	Rohde & Schwarz	XSRM	1316	6	03-Dec-2021
Multimeter	Iso-tech	IDM101	2421	12	30-Oct-2021
Hygrometer	Rotronic	I-1000	3220	12	16-Oct-2021
Frequency Standard	Spectracom	SecureSync 1200-0408-0601	4393	6	03-Dec-2021
Power splitter - 2 port	Mini-Circuits	ZN2PD-63-S+	4742	12	15-Jan-2022
Climatic Chamber	Aralab	FitoTerm 300E45	4823	12	12-Apr-2022
EXA	Keysight Technologies	N9010B	4969	24	03-Feb-2022
AC Programmable Power Supply	iTech	IT7324	5225	-	O/P Mon
Power Splitter, 2 way	Mini-Circuits	ZN2PD2-63-S+	5239	-	O/P Mon
Attenuator 5W 20dB DC-18GHz	Aaren	AT40A-4041-D18-20	5498	12	10-May-2022
Signal Commissioning Unit	TUV SUD	SCU001	5546	12	16-Apr-2022
Attenuator 2W 10dB DC-10GHz	Telegartner	J01156A0031	5576	-	O/P Mon
Attenuator 2W 10dB DC-10GHz	Telegartner	J01156A0031	5580	-	O/P Mon
2-Way Power Divider (2-8 GHz)	Aaren	AT30A-TE0208-2-AF	5685	12	18-Dec-2021
2-Way Power Divider (2-8 GHz)	Aaren	AT30A-TE0208-2-AF	5687	12	18-Dec-2021
Signal Commissioning Unit	TUV SUD	SCU002	5759	12	30-Jun-2022

Table 439

O/P Mon – Output Monitored using calibrated equipment



2.4 Emission Bandwidth

2.4.1 Specification Reference

FCC 47 CFR Part 15E, Clause 15.407 (a)
ISED RSS-247, Clause 6.2

2.4.2 Equipment Under Test and Modification State

A2442, S/N: V3WLWCFN6 - Modification State 0
A2442, S/N: MJ2Y719JTQ – Modification State 0

2.4.3 Date of Test

20-August-2021 to 20-September-2021

2.4.4 Test Method

The test was performed in accordance with ANSI C63.10 clauses 6.9.3, 12.5.1, and 12.5.2. ISED requirements were tested in accordance with RSS-GEN clause 6.7.

2.4.5 Environmental Conditions

Ambient Temperature	21.4 - 23.0 °C
Relative Humidity	48.9 - 61.7 %



2.4.6 Test Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):		Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5180	21.540	-	-	-	21.540	-
5200	20.760	-	-	-	20.760	-
5240	20.820	-	-	-	20.820	-

Table 440 - 26 dB Bandwidth Results



Figure 85 - Core 0 (A) 5180 MHz (CH36) 26 dB and 99% Bandwidth



Figure 86 - Core 0 (A) 5200 MHz (CH40) 26 dB and 99% Bandwidth



Figure 87 - Core 0 (A) 5240 MHz (CH48) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):		Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	99% Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5180	16.620	-	-	-	16.620	-
5200	16.620	-	-	-	16.620	-
5240	16.560	-	-	-	16.560	-

Table 441 - 99% Bandwidth Results



Figure 88 - Core 0 (A) 5180 MHz (CH36) 26 dB and 99% Bandwidth



Figure 89 - Core 0 (A) 5200 MHz (CH40) 26 dB and 99% Bandwidth



Figure 90 - Core 0 (A) 5240 MHz (CH48) 26 dB and 99% Bandwidth

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5180	22.800	-	-	-	22.800	-
5200	21.000	-	-	-	21.000	-
5240	20.880	-	-	-	20.880	-

Table 442 - 26 dB Bandwidth Results



Figure 91 - Core 0 (A) 5180 MHz (CH36) 26 dB and 99% Bandwidth



Figure 92 - Core 0 (A) 5200 MHz (CH40) 26 dB and 99% Bandwidth



Figure 93 - Core 0 (A) 5240 MHz (CH48) 26 dB and 99% Bandwidth

Test Frequency (MHz)	99% Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5180	17.760	-	-	-	17.760	-
5200	17.640	-	-	-	17.640	-
5240	17.640	-	-	-	17.640	-





Figure 95 - Core 0 (A) 5200 MHz (CH40) 26 dB and 99% Bandwidth



Figure 96 - Core 0 (A) 5240 MHz (CH48) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):		Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5180	22.560	22.080	-	-	22.080	-
5200	20.940	20.940	-	-	20.940	-
5240	21.060	21.060	-	-	21.060	-

Table 444 - 26 dB Bandwidth Results



Figure 97 - Core 0 (A) 5180 MHz (CH36) 26 dB and 99% Bandwidth



Figure 98 - Core 1 (B) 5180 MHz (CH36) 26 dB and 99% Bandwidth



Figure 99 - Core 0 (A) 5200 MHz (CH40) 26 dB and 99% Bandwidth



Figure 100 - Core 1 (B) 5200 MHz (CH40) 26 dB and 99% Bandwidth



Figure 101 - Core 0 (A) 5240 MHz (CH48) 26 dB and 99% Bandwidth



Figure 102 - Core 1 (B) 5240 MHz (CH48) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):		Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	99% Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5180	17.820	17.820	-	-	17.820	-
5200	17.700	17.700	-	-	17.700	-
5240	17.700	17.700	-	-	17.700	-

Table 445 - 99% Bandwidth Results



Figure 103 - Core 0 (A) 5180 MHz (CH36) 26 dB and 99% Bandwidth



Figure 104 - Core 1 (B) 5180 MHz (CH36) 26 dB and 99% Bandwidth



Figure 105 - Core 0 (A) 5200 MHz (CH40) 26 dB and 99% Bandwidth



Figure 106 - Core 1 (B) 5200 MHz (CH40) 26 dB and 99% Bandwidth



Figure 107 - Core 0 (A) 5240 MHz (CH48) 26 dB and 99% Bandwidth



Figure 108 - Core 1 (B) 5240 MHz (CH48) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):		Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS10	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5180	21.660	22.020	-	-	21.660	-
5200	21.060	20.940	-	-	20.940	-
5240	21.000	21.000	-	-	21.000	-

Table 446 - 26 dB Bandwidth Results



Figure 109 - Core 0 (A) 5180 MHz (CH36) 26 dB and 99% Bandwidth



Figure 110 - Core 1 (B) 5180 MHz (CH36) 26 dB and 99% Bandwidth



Figure 111 - Core 0 (A) 5200 MHz (CH40) 26 dB and 99% Bandwidth



Figure 112 - Core 1 (B) 5200 MHz (CH40) 26 dB and 99% Bandwidth



Figure 113 - Core 0 (A) 5240 MHz (CH48) 26 dB and 99% Bandwidth



Figure 114 - Core 1 (B) 5240 MHz (CH48) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):		Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS10	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	99% Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5180	17.760	17.760	-	-	17.760	-
5200	17.700	17.700	-	-	17.700	-
5240	17.700	17.700	-	-	17.700	-

Table 447 - 99% Bandwidth Results



Figure 115 - Core 0 (A) 5180 MHz (CH36) 26 dB and 99% Bandwidth



Figure 116 - Core 1 (B) 5180 MHz (CH36) 26 dB and 99% Bandwidth



Figure 117 - Core 0 (A) 5200 MHz (CH40) 26 dB and 99% Bandwidth



Figure 118 - Core 1 (B) 5200 MHz (CH40) 26 dB and 99% Bandwidth



Figure 119 - Core 0 (A) 5240 MHz (CH48) 26 dB and 99% Bandwidth



Figure 120 - Core 1 (B) 5240 MHz (CH48) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):		Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5190	42.720	-	-	-	42.720	-
5230	42.240	-	-	-	42.240	-

Table 448 - 26 dB Bandwidth Results



Figure 121 - Core 0 (A) 5190 MHz (CH38) 26 dB and 99% Bandwidth



Figure 122 - Core 0 (A) 5230 MHz (CH46) 26 dB and 99% Bandwidth



Figure 124 - Core 0 (A) 5230 MHz (CH46) 26 dB and 99% Bandwidth



Figure 126 - Core 1 (B) 5190 MHz (CH38) 26 dB and 99% Bandwidth



Figure 127 - Core 0 (A) 5230 MHz (CH46) 26 dB and 99% Bandwidth



Figure 128 - Core 1 (B) 5230 MHz (CH46) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):		Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	99% Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5190	36.480	36.480	-	-	36.480	-
5230	36.360	36.300	-	-	36.300	-

Table 451 - 99% Bandwidth Results



Figure 129 - Core 0 (A) 5190 MHz (CH38) 26 dB and 99% Bandwidth



Figure 130 - Core 1 (B) 5190 MHz (CH38) 26 dB and 99% Bandwidth



Figure 131 - Core 0 (A) 5230 MHz (CH46) 26 dB and 99% Bandwidth



Figure 132 - Core 1 (B) 5230 MHz (CH46) 26 dB and 99% Bandwidth



Figure 134 - Core 1 (B) 5190 MHz (CH38) 26 dB and 99% Bandwidth



Figure 135 - Core 0 (A) 5230 MHz (CH46) 26 dB and 99% Bandwidth



Figure 136 - Core 1 (B) 5230 MHz (CH46) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):		Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS10	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	99% Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5190	36.600	36.600	-	-	36.600	-
5230	36.240	36.300	-	-	36.240	-

Table 453 - 99% Bandwidth Results



Figure 137 - Core 0 (A) 5190 MHz (CH38) 26 dB and 99% Bandwidth







Figure 140 - Core 1 (B) 5230 MHz (CH46) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):		Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5210	83.160	-	-	-	83.160	-

Table 454 - 26 dB Bandwidth Results



Figure 141 - Core 0 (A) 5210 MHz (CH42) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):		Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	99% Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5210	75.680	-	-	-	75.680	-

Table 455 - 99% Bandwidth Results



Figure 142 - Core 0 (A) 5210 MHz (CH42) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):		Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5210	83.820	84.040	-	-	83.820	-

Table 456 - 26 dB Bandwidth Results



Figure 143 - Core 0 (A) 5210 MHz (CH42) 26 dB and 99% Bandwidth



Figure 144 - Core 1 (B) 5210 MHz (CH42) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):		Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	99% Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5210	75.680	75.680	-	-	75.680	-

Table 457 - 99% Bandwidth Results



Figure 145 - Core 0 (A) 5210 MHz (CH42) 26 dB and 99% Bandwidth



Figure 146 - Core 1 (B) 5210 MHz (CH42) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):		Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5210	83.600	84.040	-	-	83.600	-

Table 458 - 26 dB Bandwidth Results



Figure 147 - Core 0 (A) 5210 MHz (CH42) 26 dB and 99% Bandwidth



Figure 148 - Core 1 (B) 5210 MHz (CH42) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):		Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	99% Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5210	75.680	75.460	-	-	75.460	-

Table 459 - 99% Bandwidth Results



Figure 149 - Core 0 (A) 5210 MHz (CH42) 26 dB and 99% Bandwidth



Figure 150 - Core 1 (B) 5210 MHz (CH42) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):		Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5180	26.820	-	-	-	26.820	-
5200	21.480	-	-	-	21.480	-
5240	21.240	-	-	-	21.240	-

Table 460 - 26 dB Bandwidth Results



Figure 151 - Core 0 (A) 5180 MHz (CH36) 26 dB and 99% Bandwidth



Figure 152 - Core 0 (A) 5200 MHz (CH40) 26 dB and 99% Bandwidth



Figure 153 - Core 0 (A) 5240 MHz (CH48) 26 dB and 99% Bandwidth

Test Frequency (MHz)	99% Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5180	19.140	-	-	-	19.140	-
5200	19.080	-	-	-	19.080	-
5240	19.080	-	-	-	19.080	-





Figure 155 - Core 0 (A) 5200 MHz (CH40) 26 dB and 99% Bandwidth



Figure 156 - Core 0 (A) 5240 MHz (CH48) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):		Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5180	26.160	24.360	-	-	24.360	-
5200	21.360	21.300	-	-	21.300	-
5240	21.300	21.300	-	-	21.300	-

Table 462 - 26 dB Bandwidth Results



Figure 157 - Core 0 (A) 5180 MHz (CH36) 26 dB and 99% Bandwidth



Figure 158 - Core 1 (B) 5180 MHz (CH36) 26 dB and 99% Bandwidth



Figure 159 - Core 0 (A) 5200 MHz (CH40) 26 dB and 99% Bandwidth



Figure 160 - Core 1 (B) 5200 MHz (CH40) 26 dB and 99% Bandwidth



Figure 161 - Core 0 (A) 5240 MHz (CH48) 26 dB and 99% Bandwidth



Figure 162 - Core 1 (B) 5240 MHz (CH48) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):		Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	99% Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5180	19.080	19.080	-	-	19.080	-
5200	18.960	19.020	-	-	18.960	-
5240	19.020	19.080	-	-	19.020	-

Table 463 - 99% Bandwidth Results



Figure 163 - Core 0 (A) 5180 MHz (CH36) 26 dB and 99% Bandwidth



Figure 164 - Core 1 (B) 5180 MHz (CH36) 26 dB and 99% Bandwidth



Figure 165 - Core 0 (A) 5200 MHz (CH40) 26 dB and 99% Bandwidth



Figure 166 - Core 1 (B) 5200 MHz (CH40) 26 dB and 99% Bandwidth



Figure 167 - Core 0 (A) 5240 MHz (CH48) 26 dB and 99% Bandwidth



Figure 168 - Core 1 (B) 5240 MHz (CH48) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):		Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5180	24.840	22.500	-	-	22.500	-
5200	21.300	21.420	-	-	21.300	-
5240	21.360	21.480	-	-	21.360	-

Table 464 - 26 dB Bandwidth Results



Figure 169 - Core 0 (A) 5180 MHz (CH36) 26 dB and 99% Bandwidth



Figure 170 - Core 1 (B) 5180 MHz (CH36) 26 dB and 99% Bandwidth



Figure 171 - Core 0 (A) 5200 MHz (CH40) 26 dB and 99% Bandwidth





Figure 174 - Core 1 (B) 5240 MHz (CH48) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):		Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	99% Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5180	19.140	19.140	-	-	19.140	-
5200	19.020	19.020	-	-	19.020	-
5240	19.020	19.020	-	-	19.020	-

Table 465 - 99% Bandwidth Results



Figure 175 - Core 0 (A) 5180 MHz (CH36) 26 dB and 99% Bandwidth



Figure 176 - Core 1 (B) 5180 MHz (CH36) 26 dB and 99% Bandwidth



Figure 177 - Core 0 (A) 5200 MHz (CH40) 26 dB and 99% Bandwidth





Figure 180 - Core 1 (B) 5240 MHz (CH48) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):		Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 RU26	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	26 dB Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5180 (RU26.0)	20.040	-	-	-	20.040	-
5200 (RU26.0)	20.040	-	-	-	20.040	-
5240 (RU26.8)	20.400	-	-	-	20.400	-

Table 466 - 26 dB Bandwidth Results



Figure 181 - Core 0 (A) 5180 MHz (CH36) 26 dB and 99% Bandwidth



Figure 182 - Core 0 (A) 5200 MHz (CH40) 26 dB and 99% Bandwidth



Figure 183 - Core 0 (A) 5240 MHz (CH48) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):		Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 RU26	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	99% Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5180 (RU26.0)	18.420	-	-	-	18.420	-
5200 (RU26.0)	18.420	-	-	-	18.420	-
5240 (RU26.8)	18.600	-	-	-	18.600	-

Table 467 - 99% Bandwidth Results



Figure 184 - Core 0 (A) 5180 MHz (CH36) 26 dB and 99% Bandwidth



Figure 185 - Core 0 (A) 5200 MHz (CH40) 26 dB and 99% Bandwidth



Figure 186 - Core 0 (A) 5240 MHz (CH48) 26 dB and 99% Bandwidth



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):		Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 RU26	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)					Limit (kHz)
	A	B	C	D	Minimum	
5180 (RU26.0)	19.980	19.680	-	-	19.680	-
5200 (RU26.0)	19.920	19.680	-	-	19.680	-
5240 (RU26.8)	20.340	19.920	-	-	19.920	-

Table 468 - 26 dB Bandwidth Results



Figure 187 - Core 0 (A) 5180 MHz (CH36) 26 dB and 99% Bandwidth



Figure 188 - Core 1 (B) 5180 MHz (CH36) 26 dB and 99% Bandwidth



Figure 189 - Core 0 (A) 5200 MHz (CH40) 26 dB and 99% Bandwidth