

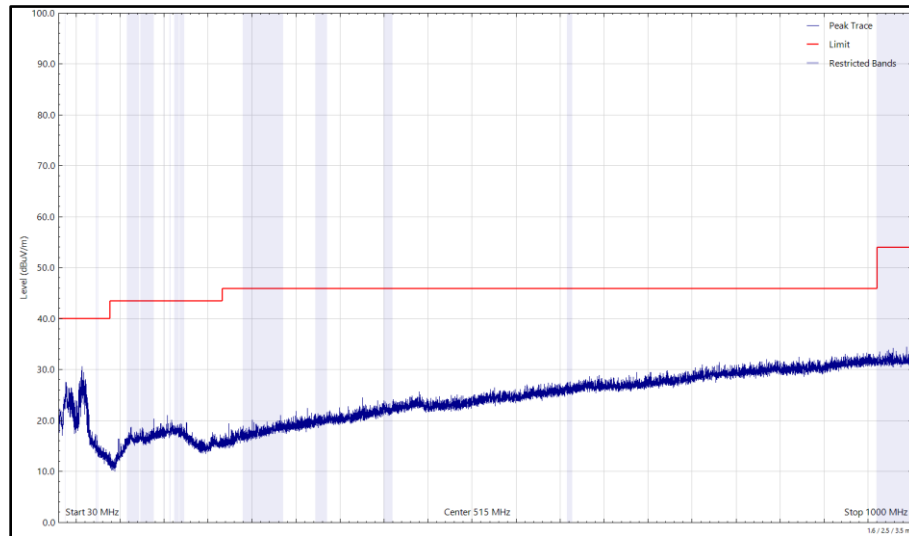


Figure 62 - 2437 MHz (CH6), 802.11b, Core 0, 30 MHz to 1 GHz, Vertical (Peak)

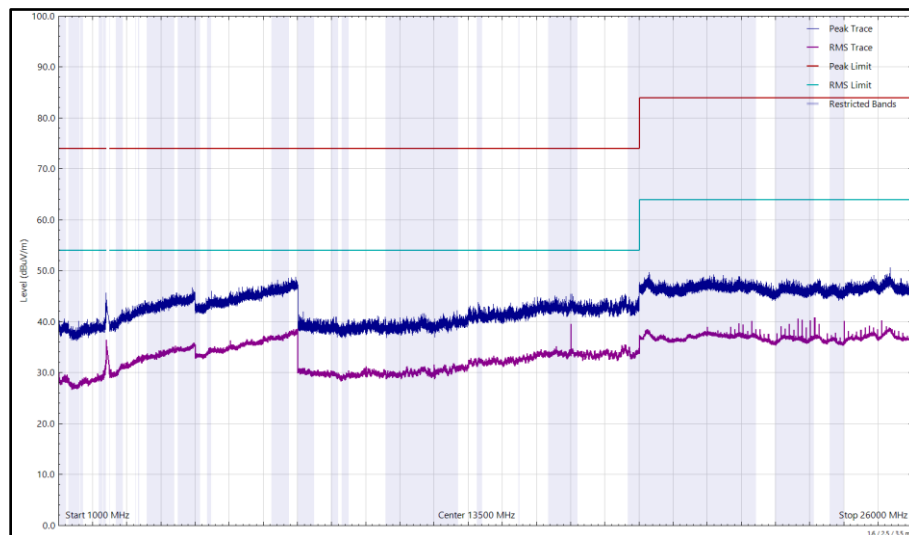


Figure 63 - 2437 MHz (CH6), 802.11b, Core 0, 1 GHz to 26 GHz, Vertical



Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
*							

Table 55 - 2472 MHz (CH13), 802.11b, Core 0, 1 to 26 GHz

*No emissions found within 10 dB of the limit.

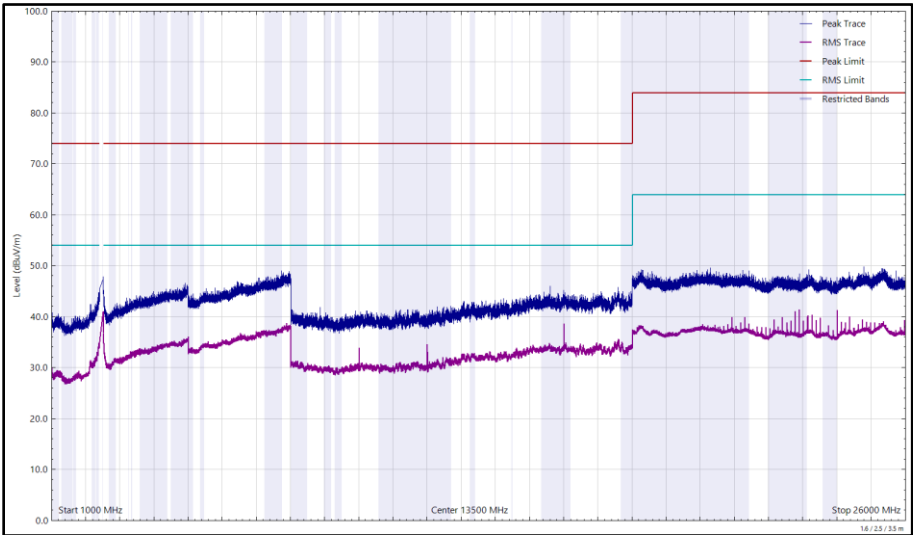


Figure 64 - 2472 MHz (CH13), 802.11b, Core 0, 1 GHz to 26 GHz, Horizontal

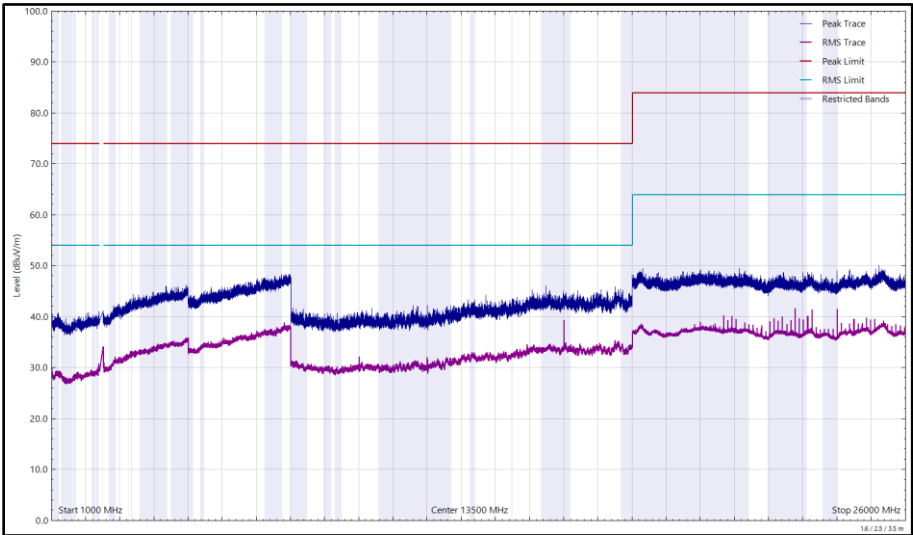


Figure 65 - 2472 MHz (CH13), 802.11b, Core 0, 1 GHz to 26 GHz, Vertical

Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
16000.000	43.83	54.00	-10.17	RMS	121	143	Vertical

Table 56 - 2412 MHz (CH1), 802.11b, Core 1, 1 to 26 GHz

No other emissions found within 10 dB of the limit.

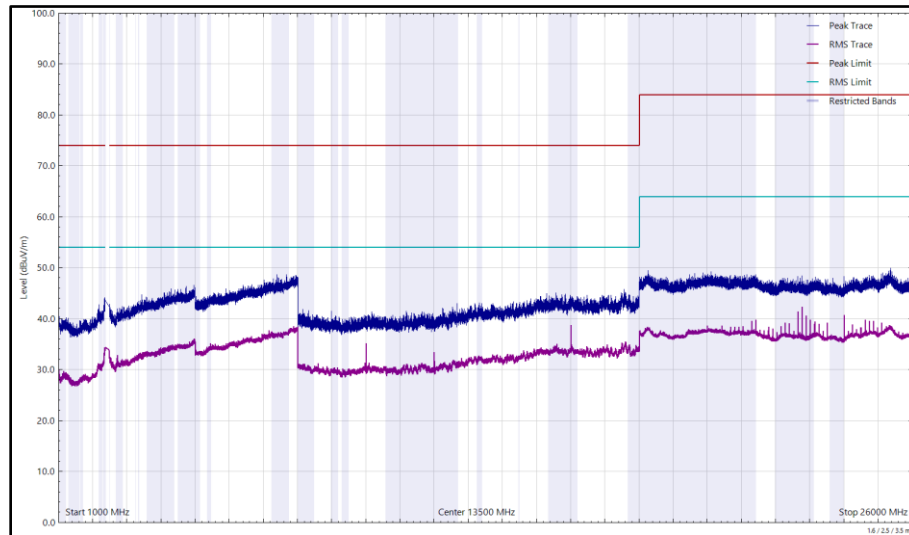


Figure 66 - 2412 MHz (CH1), 802.11b, Core 1, 1 GHz to 26 GHz, Horizontal

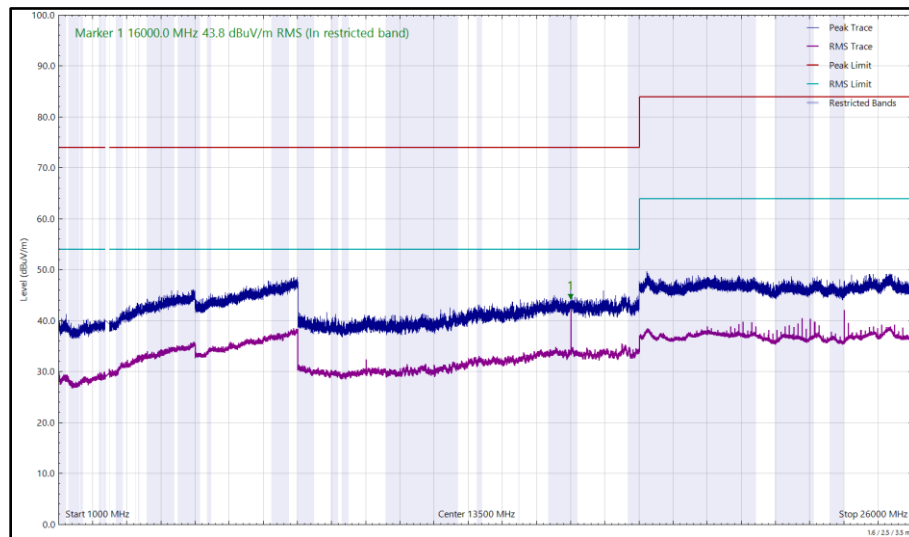


Figure 67 - 2412 MHz (CH1), 802.11b, Core 1, 1 GHz to 26 GHz, Vertical



Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
*							

Table 57 - 2437 MHz (CH6), 802.11b, Core 1, 30 MHz to 26 GHz

*No emissions found within 10 dB of the limit.

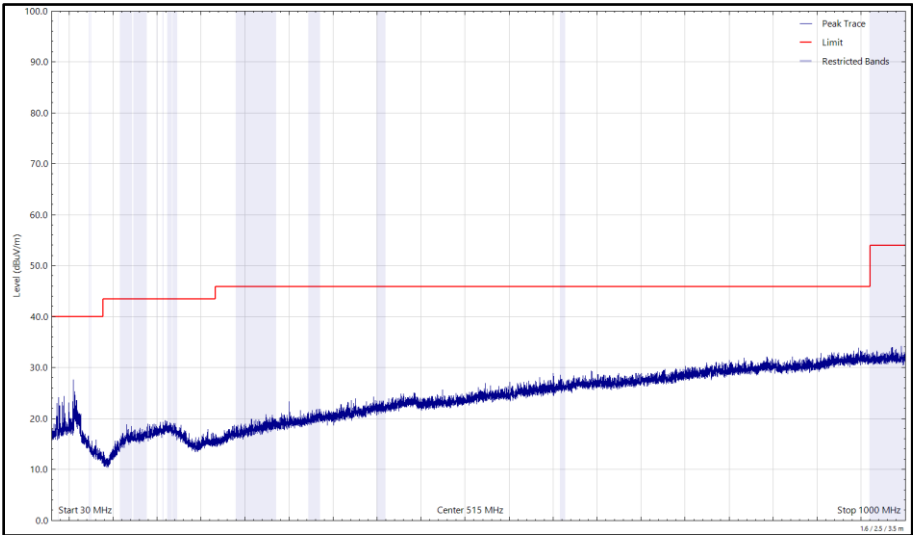


Figure 68 - 2437 MHz (CH6), 802.11b, Core 1, 30 MHz to 1 GHz, Horizontal (Peak)

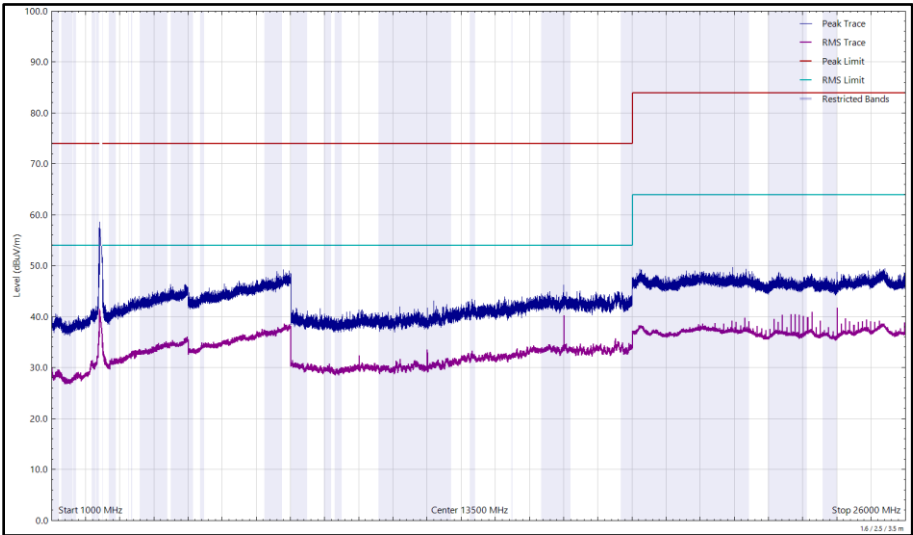


Figure 69 - 2437 MHz (CH6), 802.11b, Core 1, 1 GHz to 26 GHz, Horizontal

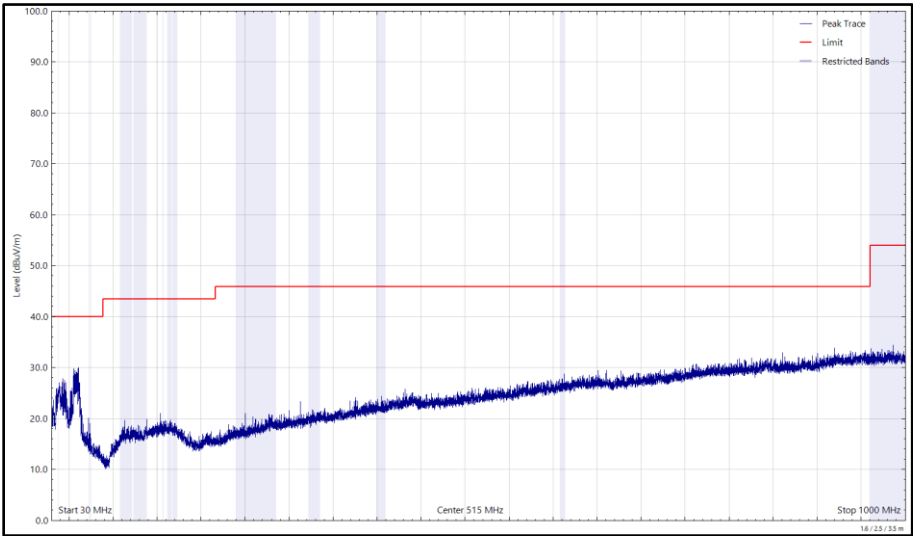


Figure 70 - 2437 MHz (CH6), 802.11b, Core 1, 30 MHz to 1 GHz, Vertical (Peak)

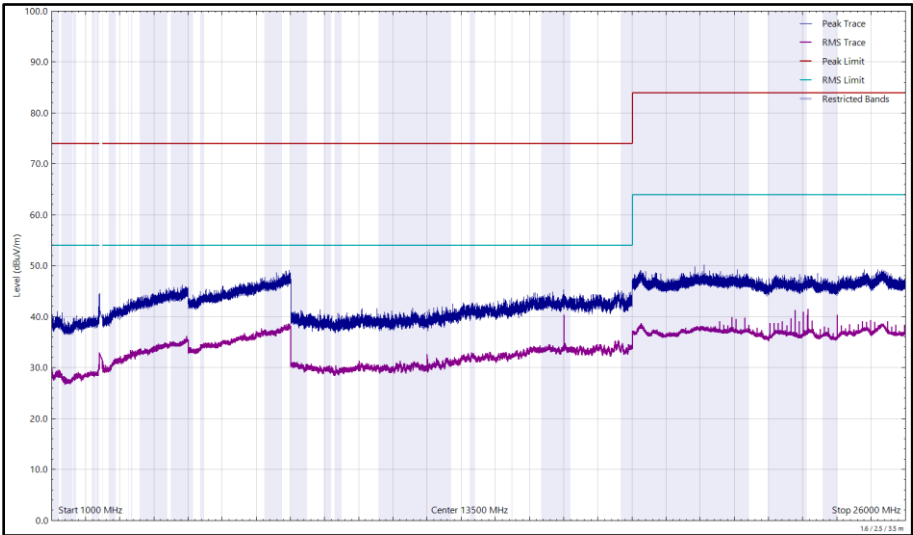


Figure 71 - 2437 MHz (CH6), 802.11b, Core 1, 1 GHz to 26 GHz, Vertical



Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
*							

Table 58 - 2472 MHz (CH13), 802.11b, Core 1, 1 to 26 GHz

*No emissions found within 10 dB of the limit.

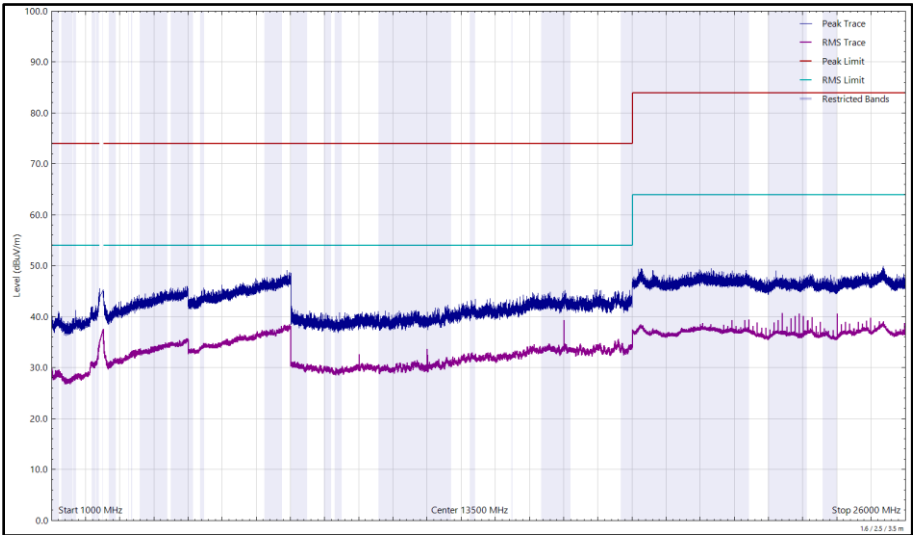


Figure 72 - 2472 MHz (CH13), 802.11b, Core 1, 1 GHz to 26 GHz, Horizontal

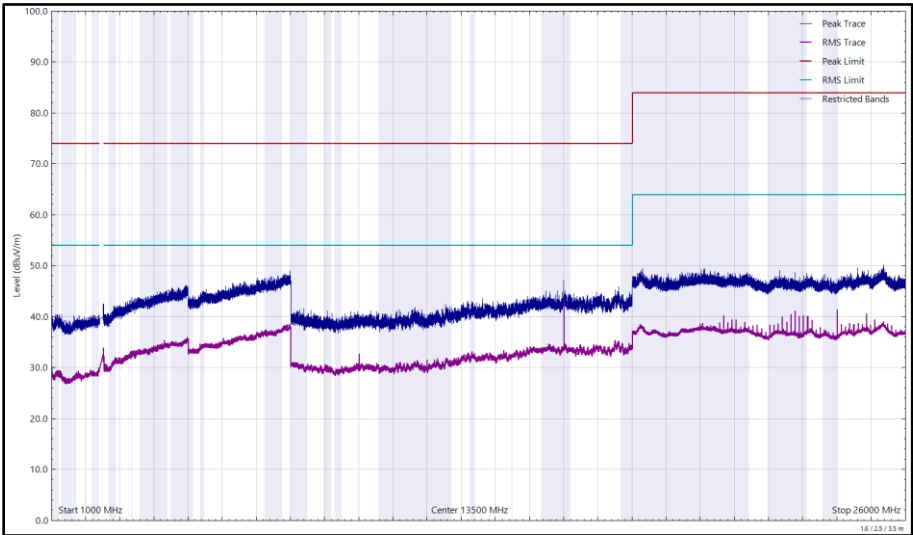


Figure 73 - 2472 MHz (CH13), 802.11b, Core 1, 1 GHz to 26 GHz, Vertical

Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
*							

Table 59 - 2412 MHz (CH1), 802.11g, Core 0, 1 to 26 GHz

*No emissions found within 10 dB of the limit.

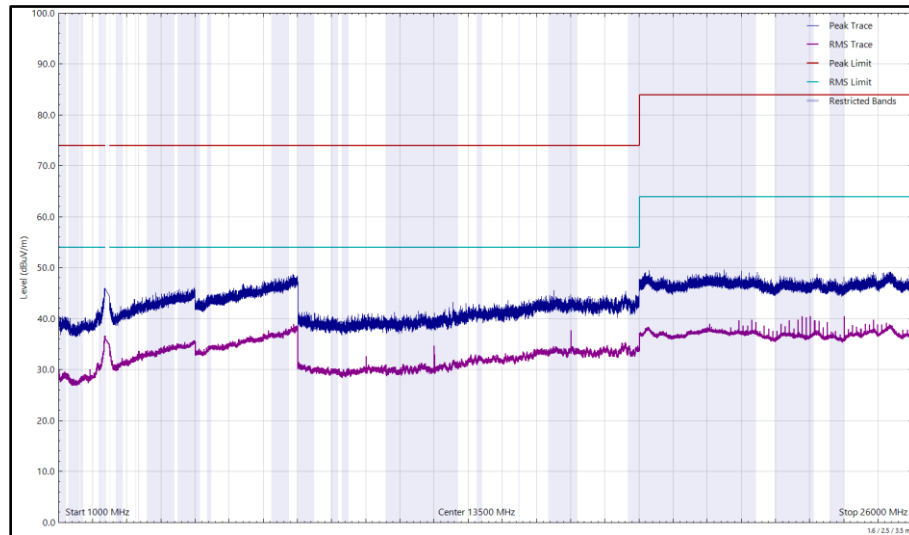


Figure 74 - 2412 MHz (CH1), 802.11g, Core 0, 1 GHz to 26 GHz, Horizontal

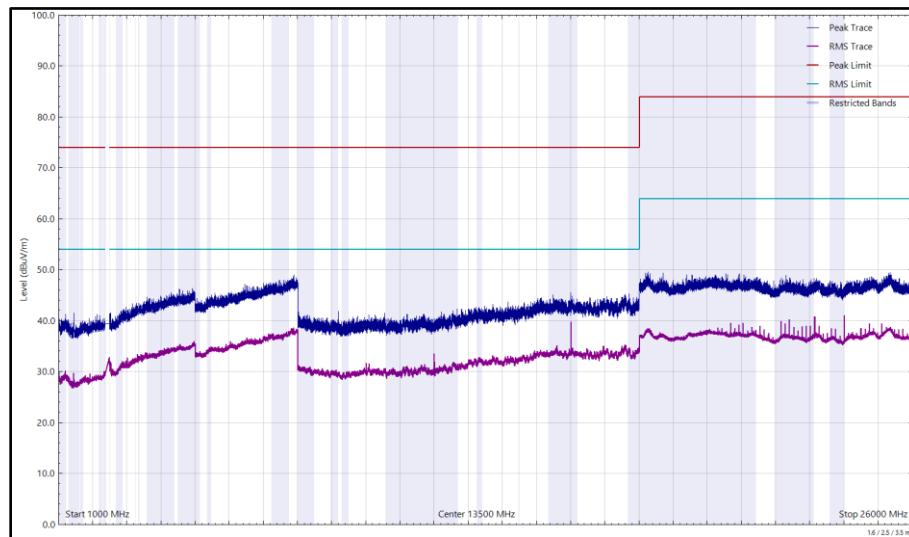


Figure 75 - 2412 MHz (CH1), 802.11g, Core 0, 1 GHz to 26 GHz, Vertical



Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
*							

Table 60 - 2437 MHz (CH6), 802.11g, Core 0, 30 MHz to 26 GHz

*No emissions found within 10 dB of the limit.

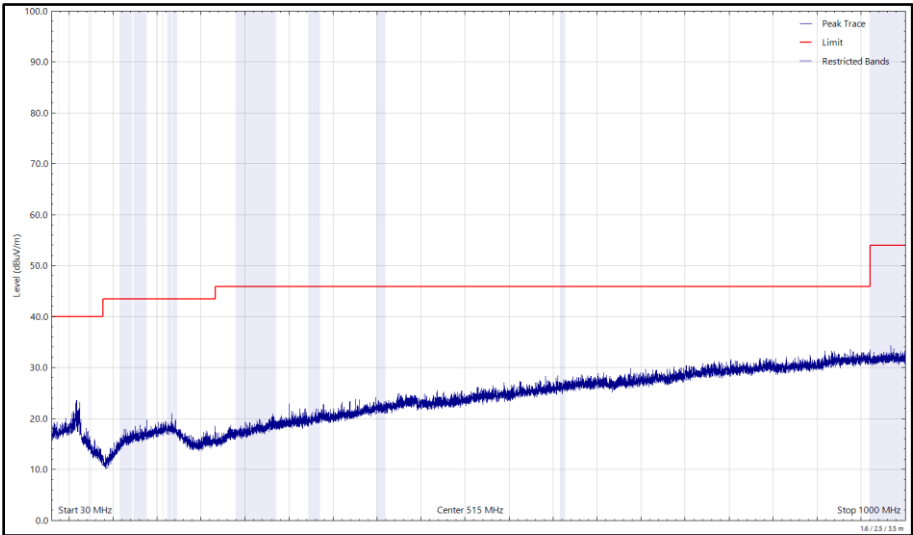


Figure 76 - 2437 MHz (CH6), 802.11g, Core 0, 30 MHz to 1 GHz, Horizontal (Peak)

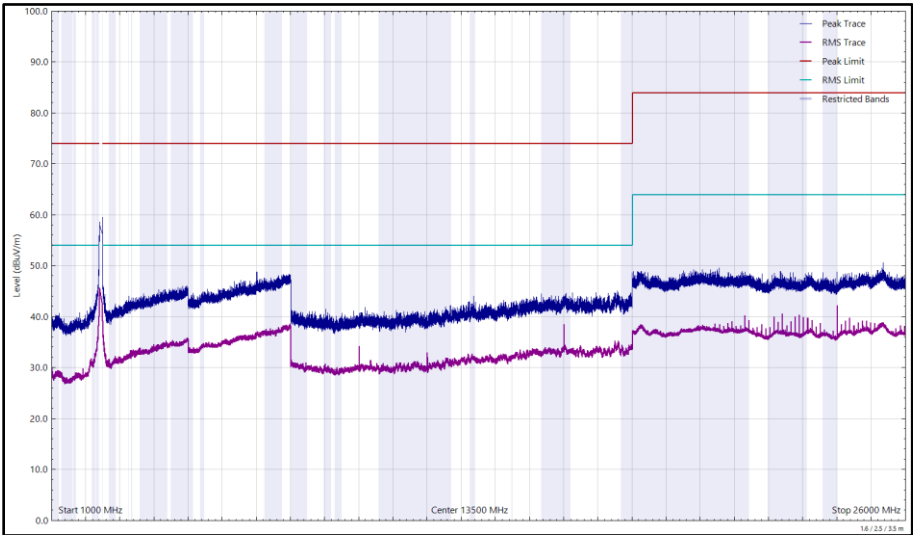


Figure 77 - 2437 MHz (CH6), 802.11g, Core 0, 1 GHz to 26 GHz, Horizontal

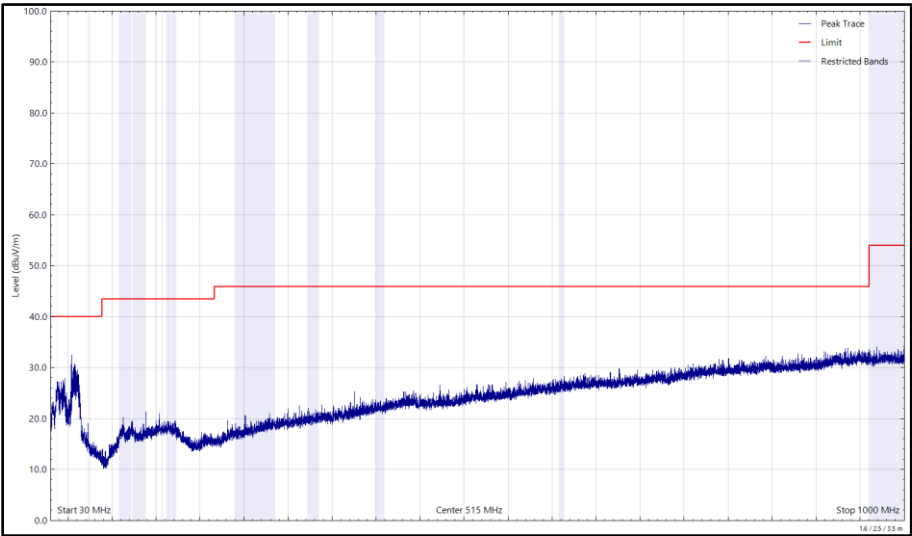


Figure 78 - 2437 MHz (CH6), 802.11g, Core 0, 30 MHz to 1 GHz, Vertical (Peak)

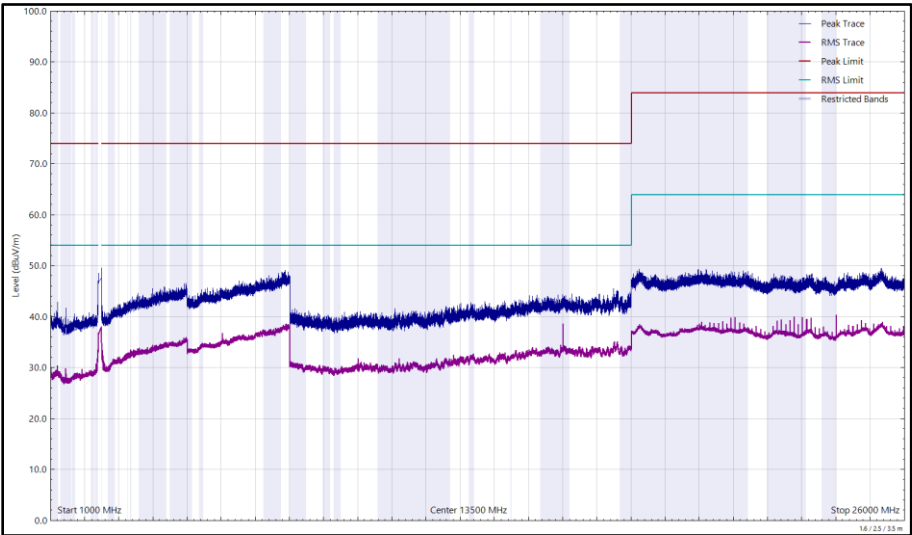


Figure 79 - 2437 MHz (CH6), 802.11g, Core 0, 1 GHz to 26 GHz, Vertical



Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
*							

Table 61 - 2472 MHz (CH13), 802.11g, Core 0, 1 to 26 GHz

*No emissions found within 10 dB of the limit.

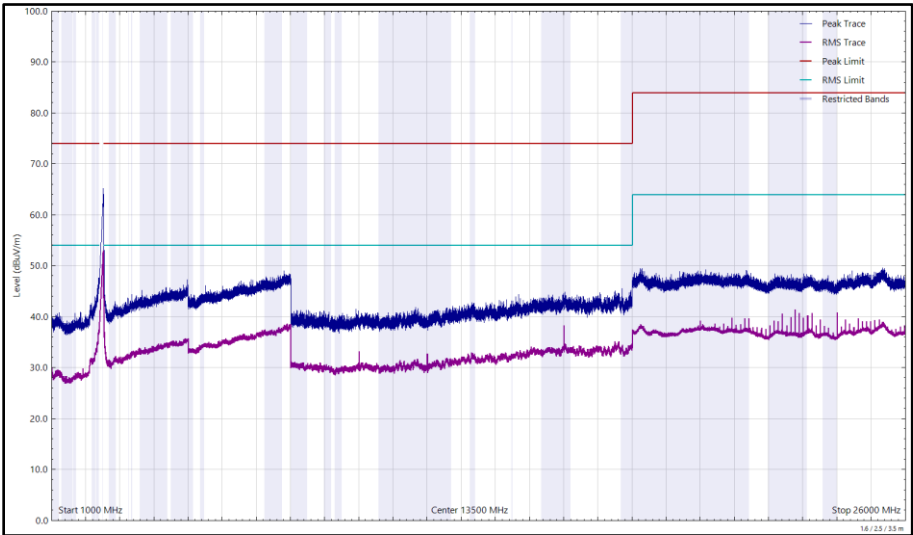


Figure 80 - 2472 MHz (CH13), 802.11g, Core 0, 1 GHz to 26 GHz, Horizontal

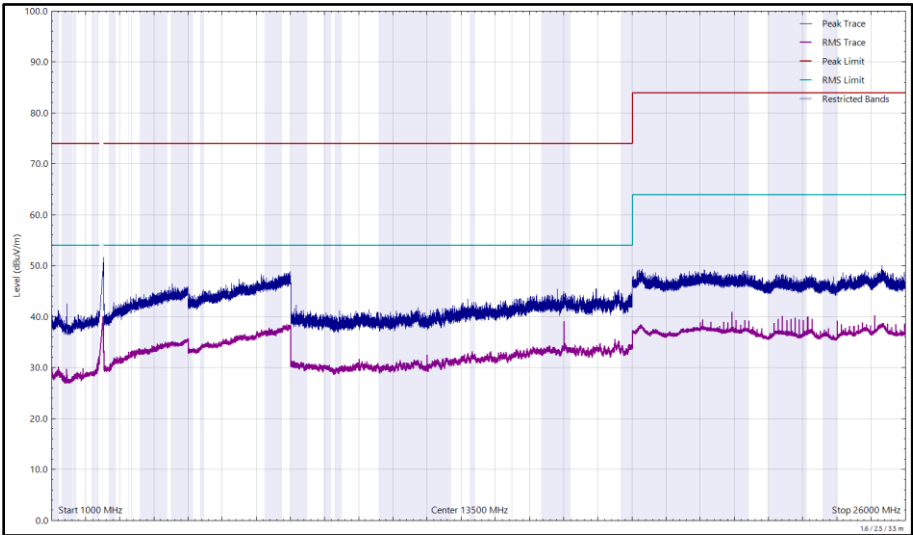


Figure 81 - 2472 MHz (CH13), 802.11g, Core 0, 1 GHz to 26 GHz, Vertical



Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
*							

Table 62 - 2412 MHz (CH1), 802.11g, Core 1, 1 to 26 GHz

*No emissions found within 10 dB of the limit.

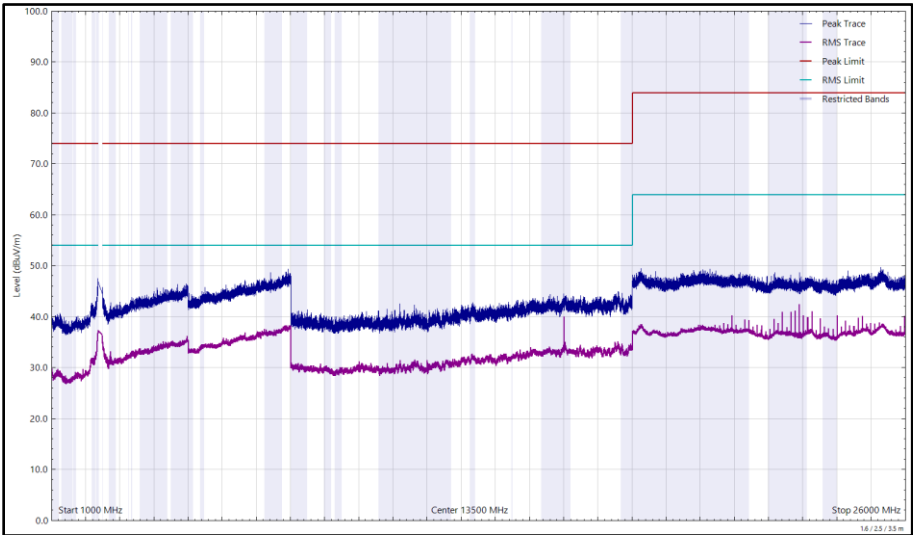


Figure 82 - 2412 MHz (CH1), 802.11g, Core 1, 1 GHz to 26 GHz, Horizontal

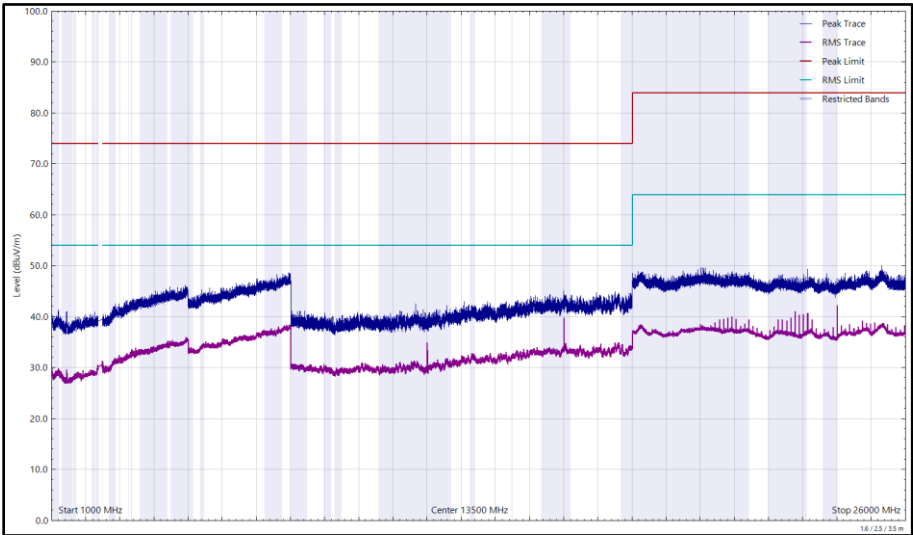


Figure 83 - 2412 MHz (CH1), 802.11g, Core 1, 1 GHz to 26 GHz, Vertical



Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
*							

Table 63 - 2437 MHz (CH6), 802.11g, Core 1, 30 MHz to 26 GHz

*No emissions found within 10 dB of the limit.

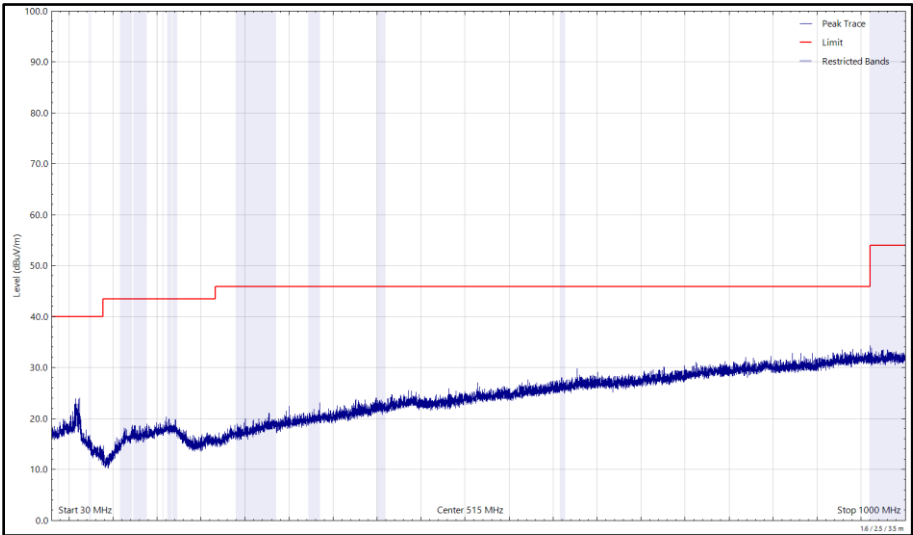


Figure 84 - 2437 MHz (CH6), 802.11g, Core 1, 30 MHz to 1 GHz, Horizontal (Peak)

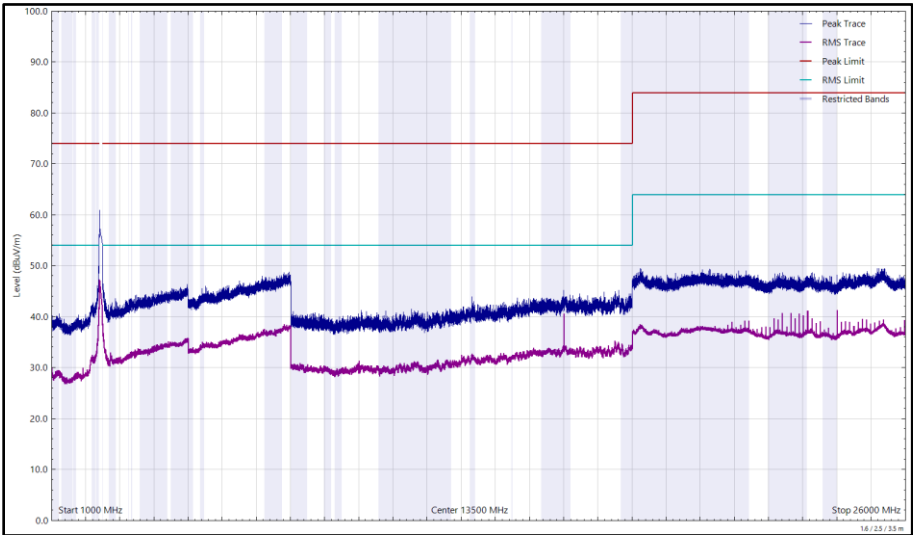


Figure 85 - 2437 MHz (CH6), 802.11g, Core 1, 1 GHz to 26 GHz, Horizontal

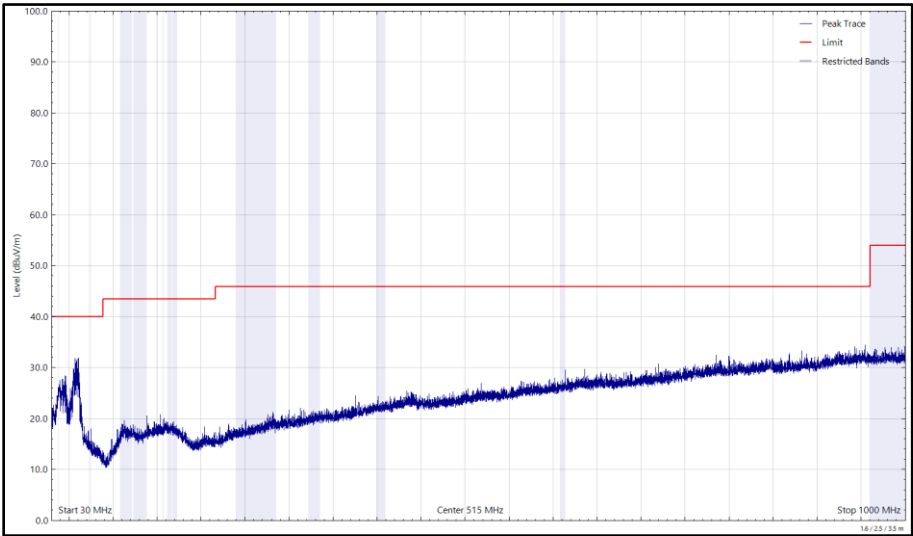


Figure 86 - 2437 MHz (CH6), 802.11g, Core 1, 30 MHz to 1 GHz, Vertical (Peak)

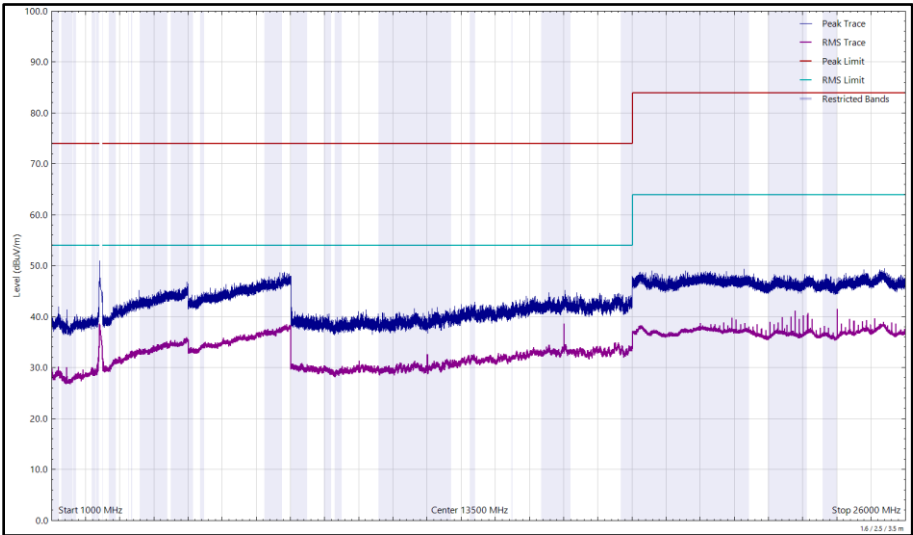


Figure 87 - 2437 MHz (CH6), 802.11g, Core 1, 1 GHz to 26 GHz, Vertical



Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
*							

Table 64 - 2472 MHz (CH13), 802.11g, Core 1, 1 to 26 GHz

*No emissions found within 10 dB of the limit.

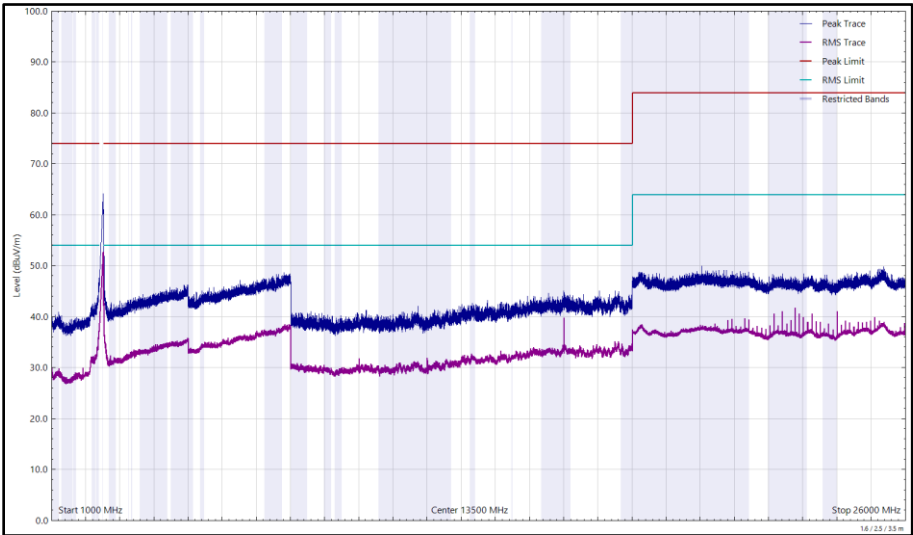


Figure 88 - 2472 MHz (CH13), 802.11g, Core 1, 1 GHz to 26 GHz, Horizontal

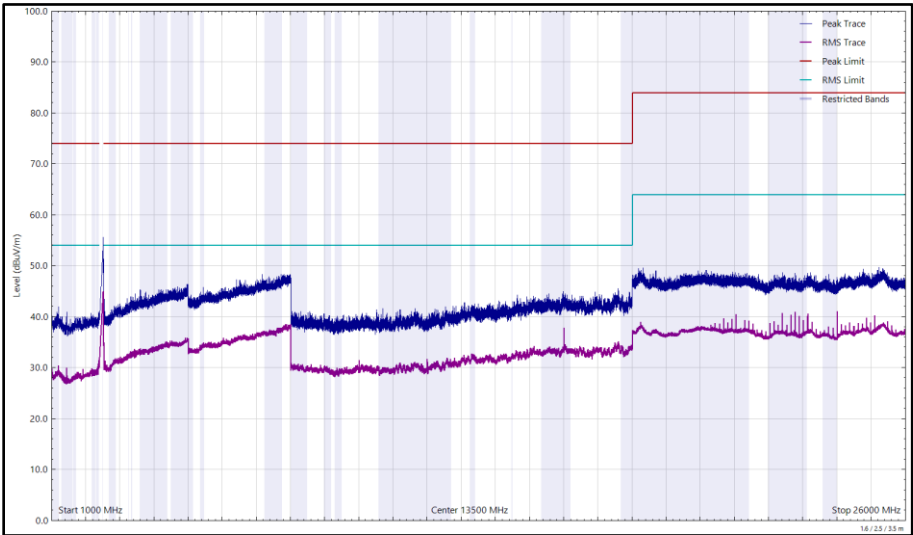


Figure 89 - 2472 MHz (CH13), 802.11g, Core 1, 1 GHz to 26 GHz, Vertical

Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
*							

Table 65 - 2412 MHz (CH1), HE20, RU26-0, CDD, Core 0 + Core 1, 1 GHz to 26 GHz

*No emissions found within 10 dB of the limit.

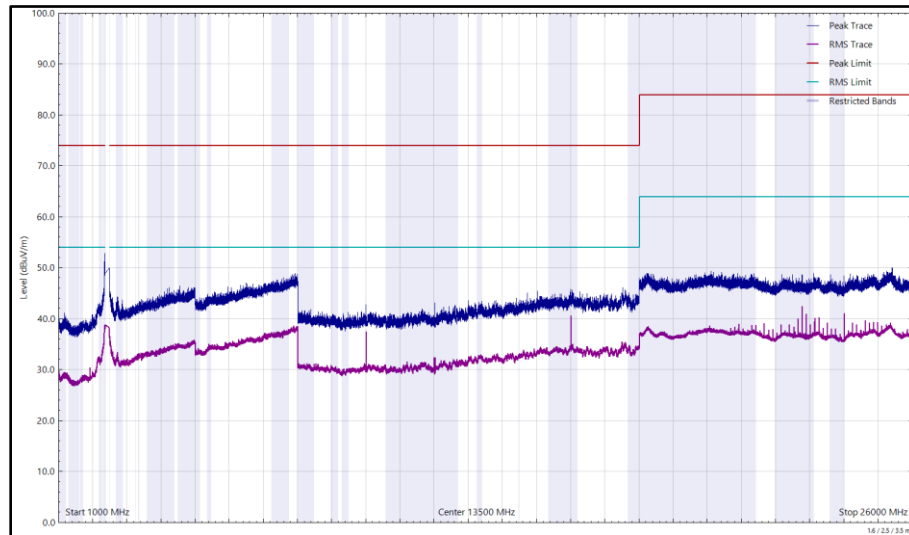


Figure 90 - 2412 MHz (CH1), HE20, RU26-0, CDD, Core 0 + Core 1, 1 GHz to 26 GHz, Horizontal

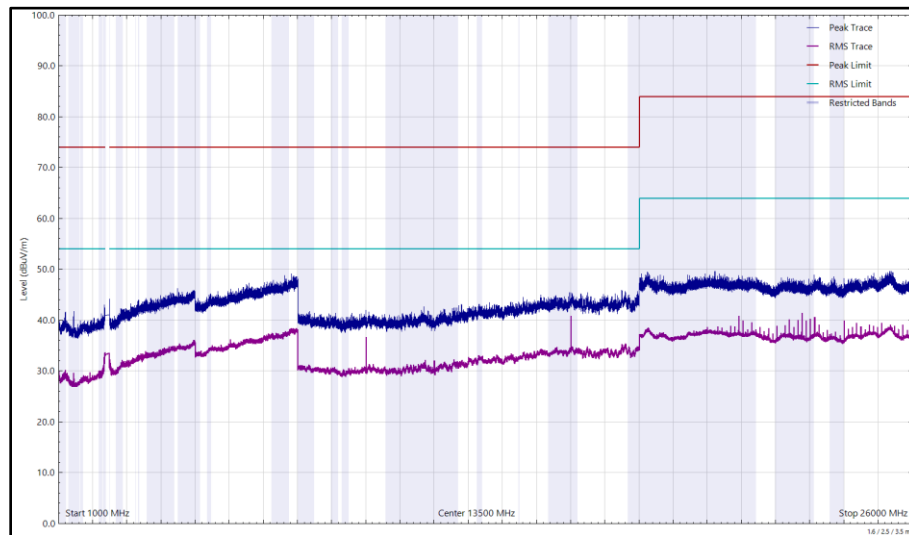


Figure 91 - 2412 MHz (CH1), HE20, RU26-0, CDD, Core 0 + Core 1, 1 GHz to 26 GHz, Vertical

Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
16000.039	43.60	54.00	-10.40	RMS	128	161	Horizontal

Table 66 - 2437 MHz (CH6), HE20, RU26-0, CDD, Core 0 + Core 1, 30 MHz to 26 GHz

No other emissions found within 10 dB of the limit.

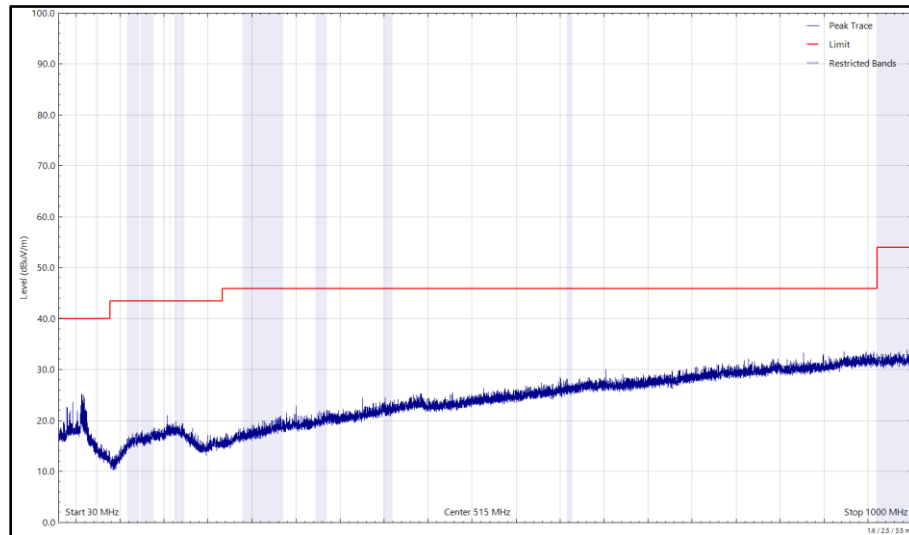


Figure 92 - 2437 MHz (CH6), HE20, RU26-0, CDD, Core 0 + Core 1, 30 MHz to 1 GHz, Horizontal (Peak)

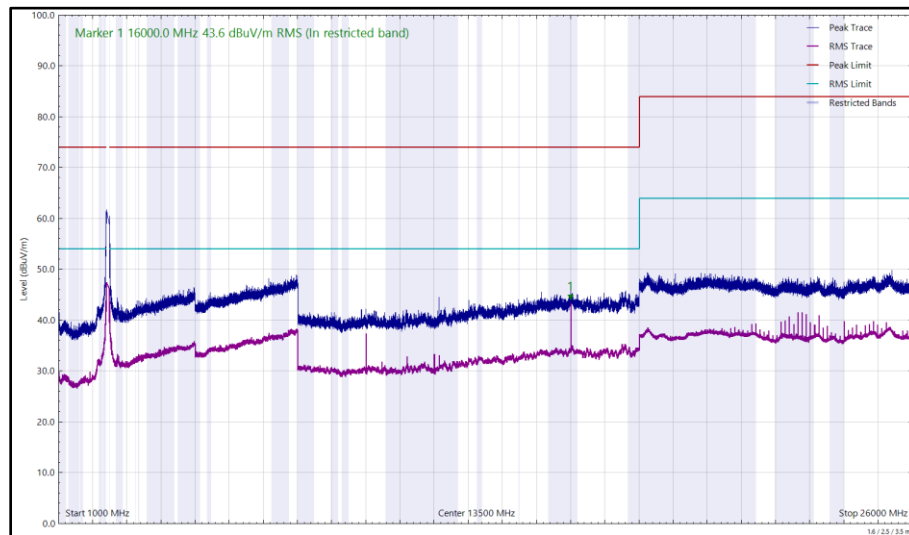


Figure 93 - 2437 MHz (CH6), HE20, RU26-0, CDD, Core 0 + Core 1, 1 GHz to 26 GHz, Horizontal

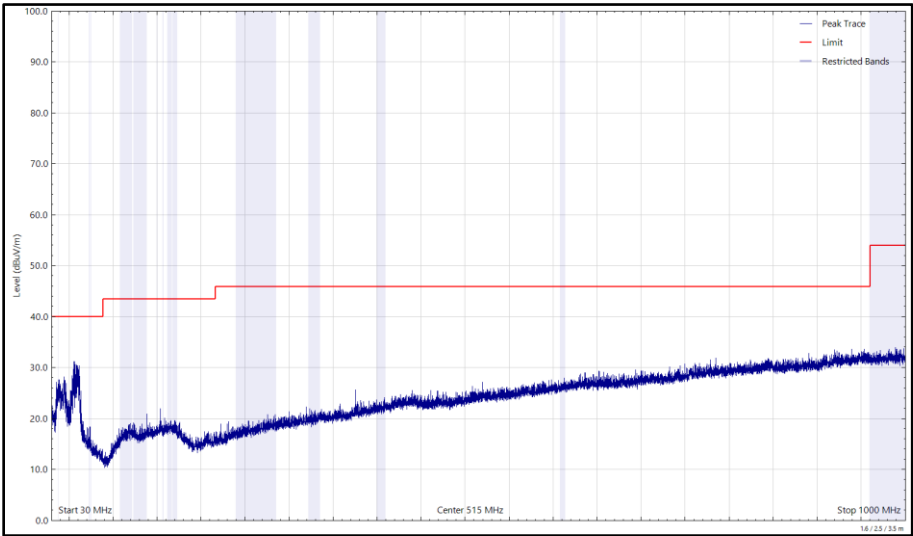


Figure 94 - 2437 MHz (CH6), HE20, RU26-0, CDD, Core 0 + Core 1, 30 MHz to 1 GHz, Vertical (Peak)

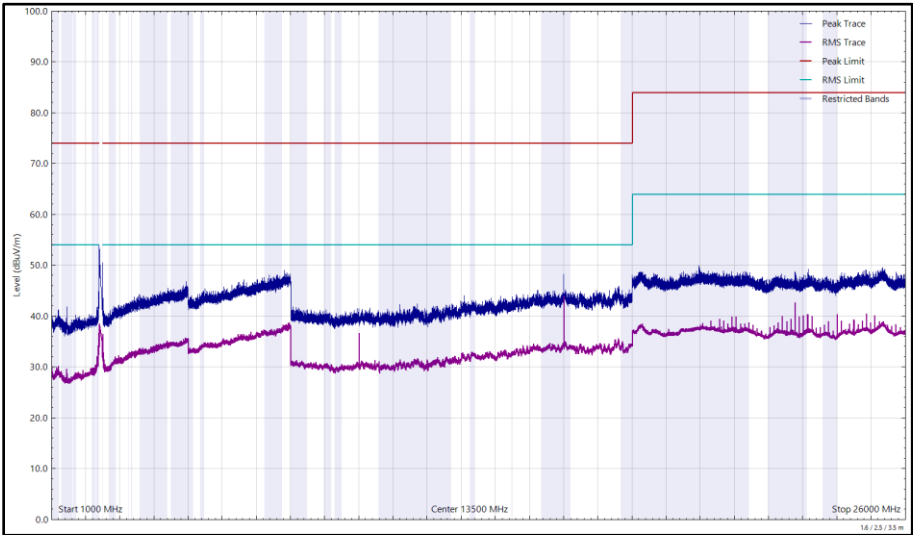


Figure 95 - 2437 MHz (CH6), HE20, RU26-0, CDD, Core 0 + Core 1, 1 GHz to 26 GHz, Vertical

Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
15999.959	43.26	54.00	-10.74	RMS	129	151	Vertical
15999.973	43.52	54.00	-10.48	RMS	128	164	Horizontal

Table 67 - 2472 MHz (CH13), HE20, RU26-0, CDD, Core 0 + Core 1, 1 GHz to 26 GHz

No other emissions found within 10 dB of the limit.

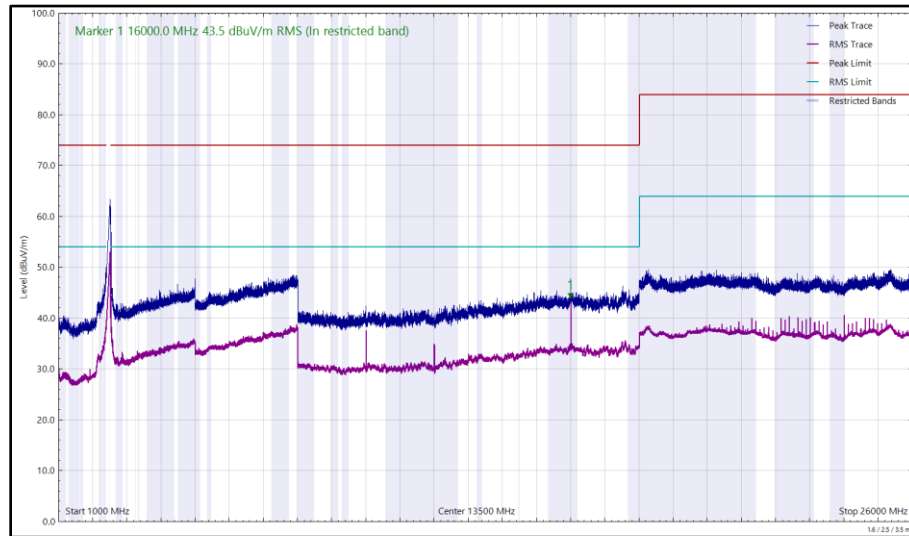


Figure 96 - 2472 MHz (CH13), HE20, RU26-0, CDD, Core 0 + Core 1, 1 GHz to 26 GHz, Horizontal

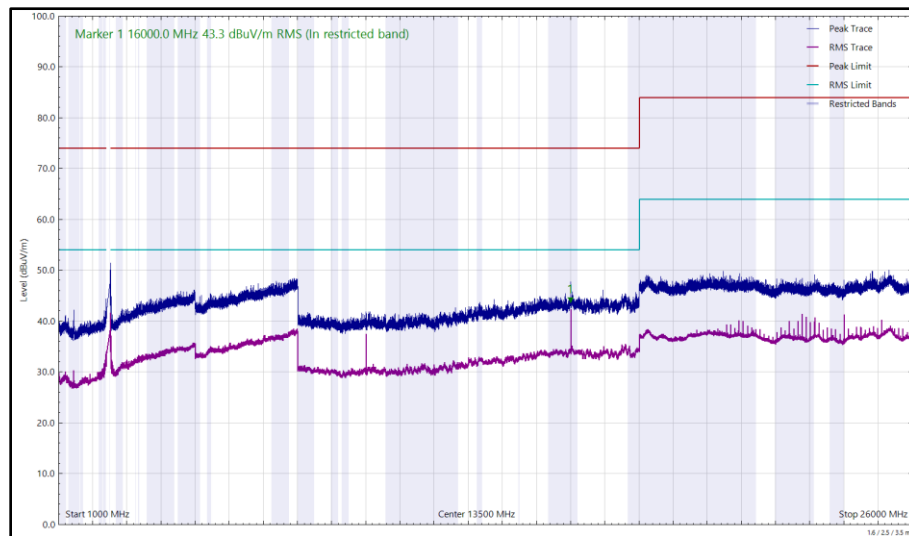


Figure 97 - 2472 MHz (CH13), HE20, RU26-0, CDD, Core 0 + Core 1, 1 GHz to 26 GHz, Vertical



Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
*							

Table 68 - 2412 MHz (CH1), HT20, CDD, Core 0 + Core 1, 1 GHz to 26 GHz

*No emissions found within 10 dB of the limit.

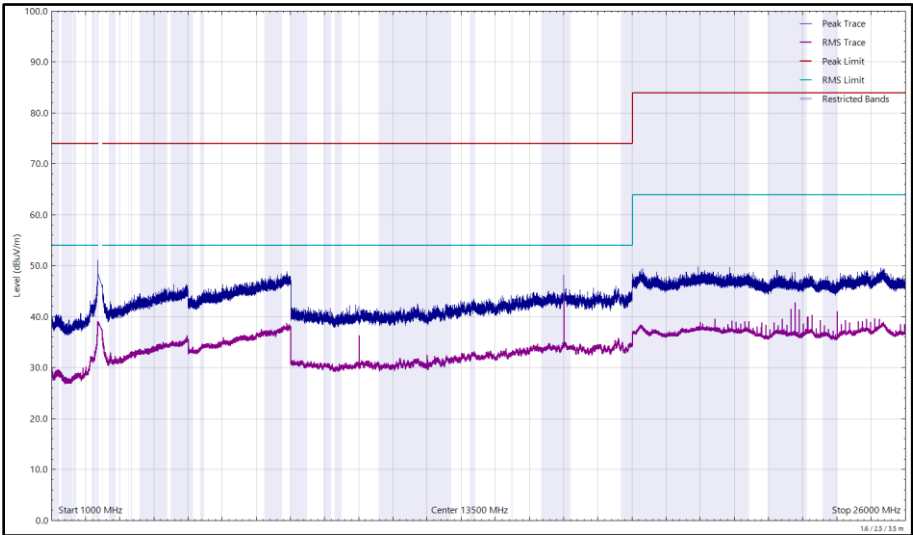


Figure 98 - 2412 MHz (CH1), HT20, CDD, Core 0 + Core 1, 1 GHz to 26 GHz, Horizontal

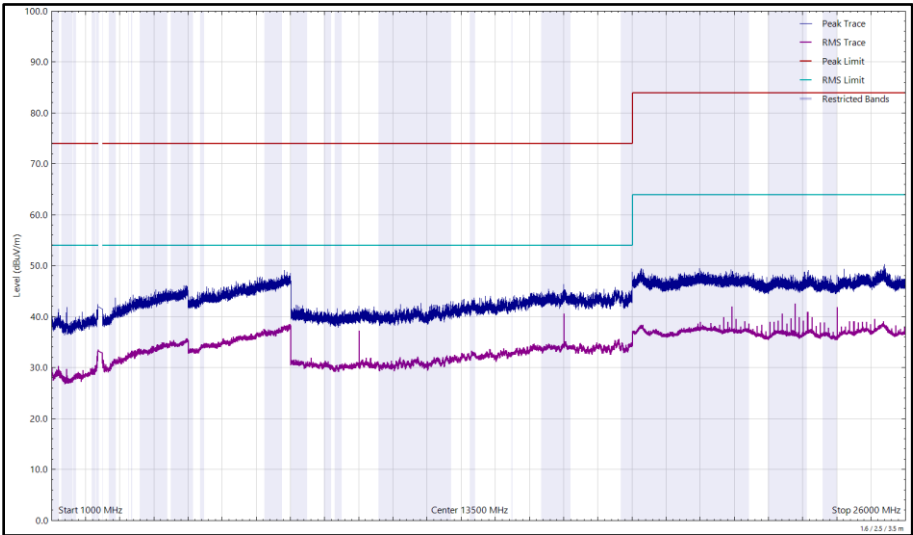


Figure 99 - 2412 MHz (CH1), HT20, CDD, Core 0 + Core 1, 1 GHz to 26 GHz, Vertical

Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
*							

Table 69 - 2437 MHz (CH6), HT20, CDD, Core 0 + Core 1, 30 MHz to 26 GHz

*No emissions found within 10 dB of the limit.

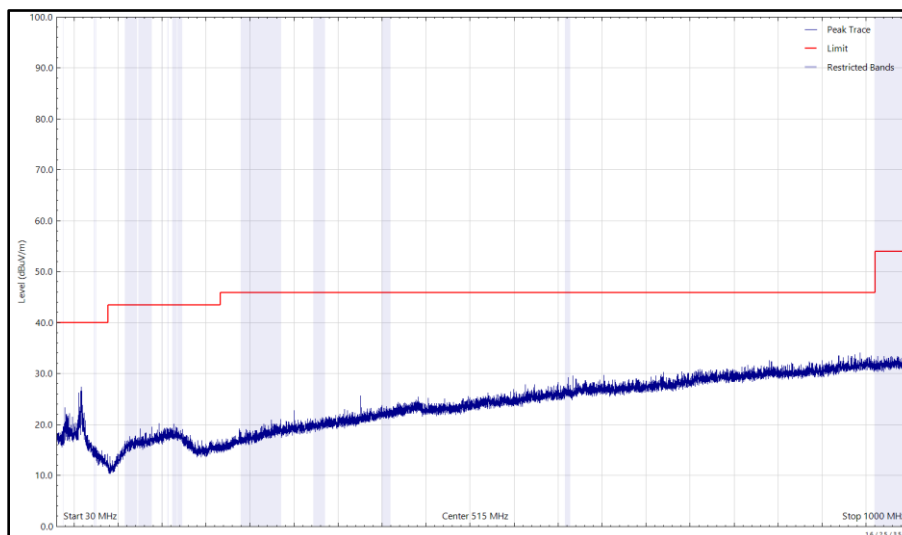


Figure 100 - 2437 MHz (CH6), HT20, CDD, Core 0 + Core 1, 30 MHz to 1 GHz, Horizontal (Peak)

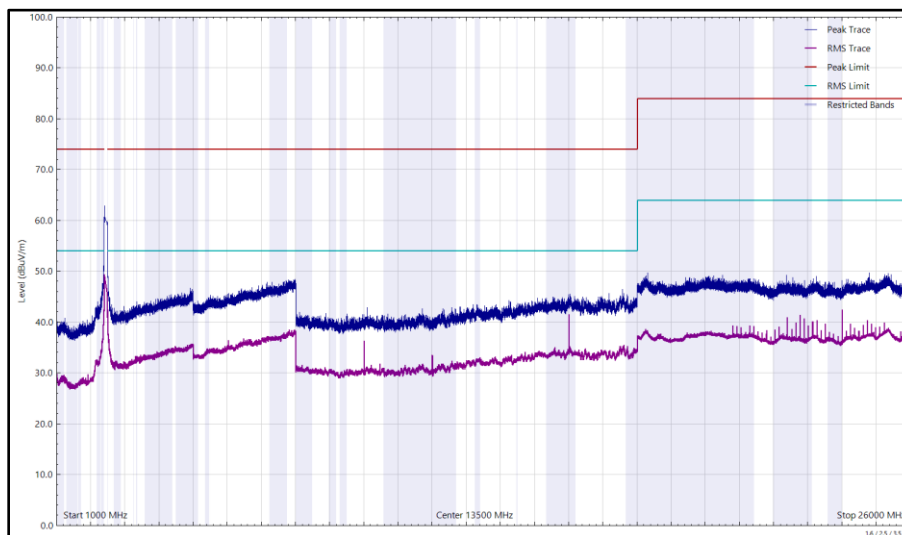


Figure 101 - 2437 MHz (CH6), HT20, CDD, Core 0 + Core 1, 1 GHz to 26 GHz, Horizontal

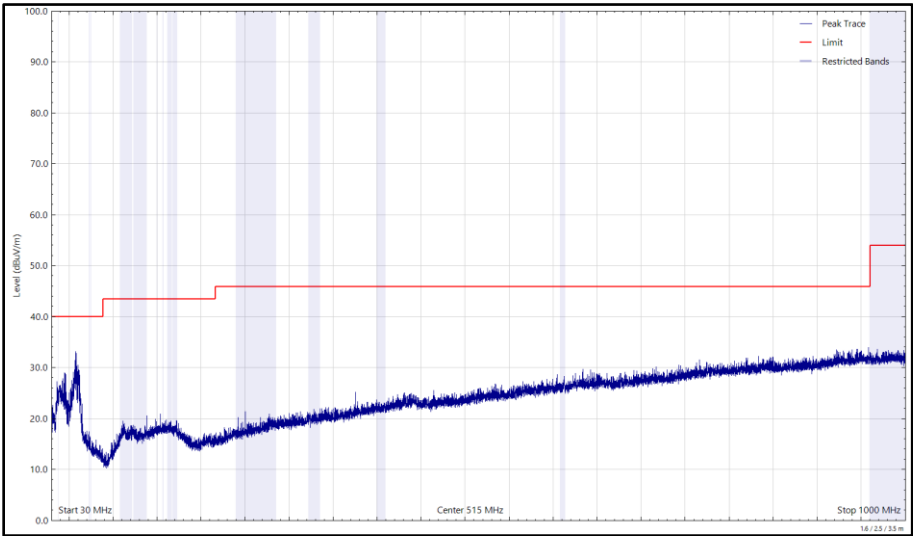


Figure 102 - 2437 MHz (CH6), HT20, CDD, Core 0 + Core 1, 30 MHz to 1 GHz, Vertical (Peak)

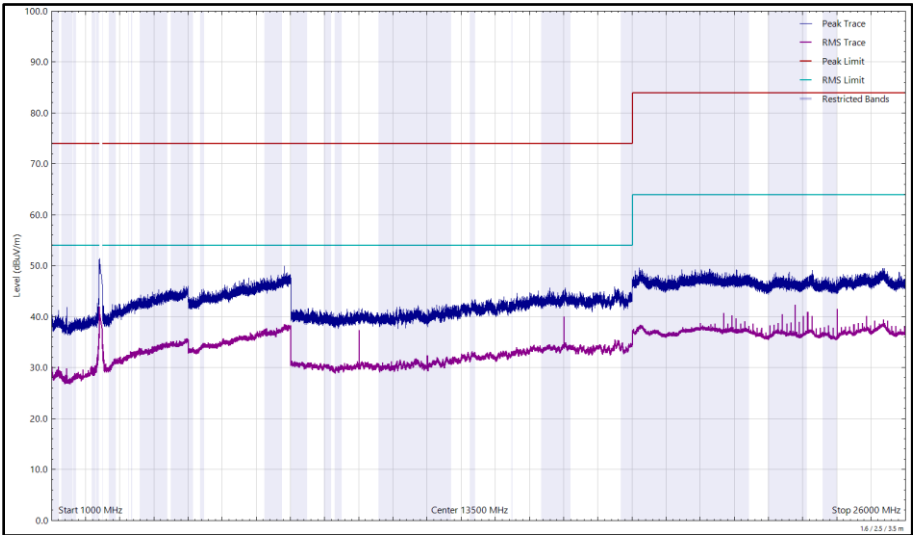


Figure 103 - 2437 MHz (CH6), HT20, CDD, Core 0 + Core 1, 1 GHz to 26 GHz, Vertical



Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
*							

Table 70 - 2472 MHz (CH13), HT20, CDD, Core 0 + Core 1, 1 GHz to 26 GHz

*No emissions found within 10 dB of the limit.

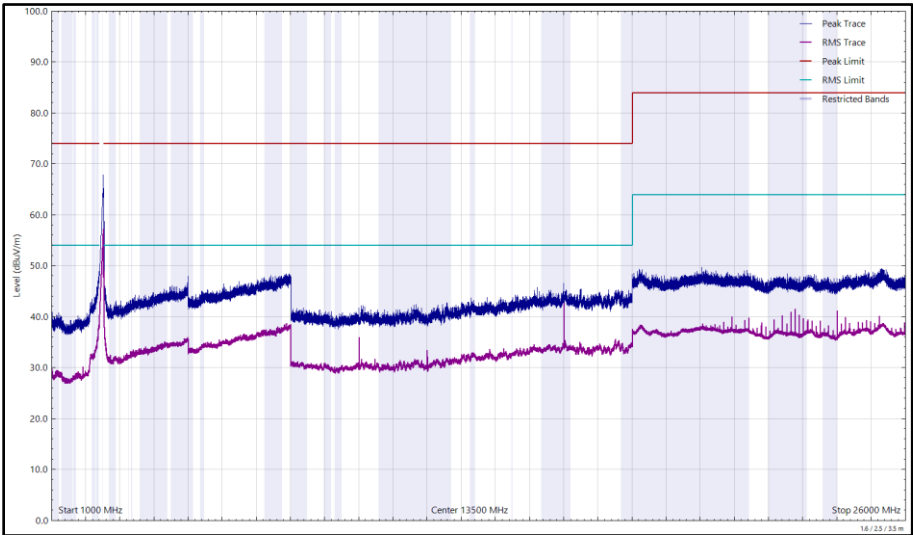


Figure 104 - 2472 MHz (CH13), HT20, CDD, Core 0 + Core 1, 1 GHz to 26 GHz, Horizontal

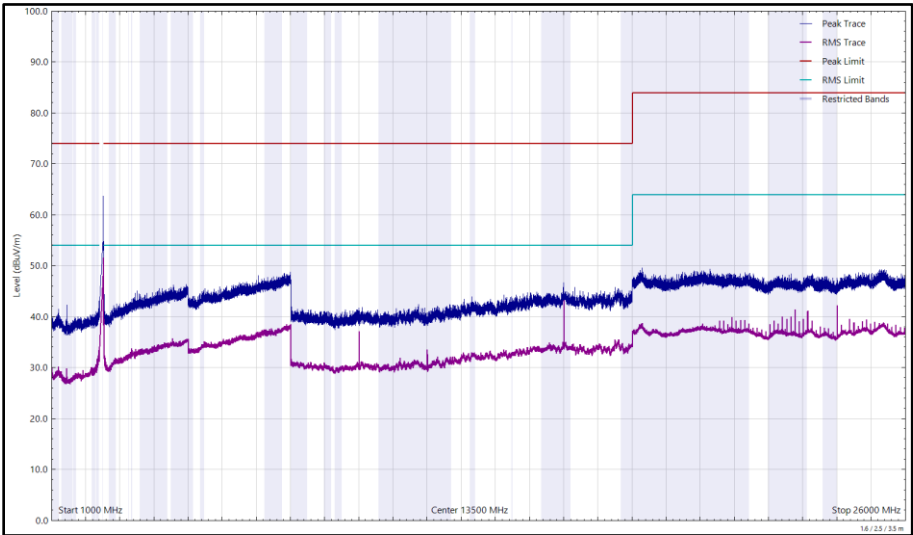


Figure 105 - 2472 MHz (CH13), HT20, CDD, Core 0 + Core 1, 1 GHz to 26 GHz, Vertical



FCC 47 CFR Part 15, Limit Clause 15.247 (d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in 15.209(a)

ISED RSS-247, Limit Clause 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

In addition, radiated emissions which fall in the restricted bands, as defined in RSS-GEN, clause 8.10, must also comply with the radiated emission limits specified in RSS-GEN clause 8.9.



2.4.8 Test Location and Test Equipment Used

This test was carried out in RF Chamber 15.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
Emissions Software	TUV SUD	EmX V3.1.10	5125	-	Software
Cable (K Type 2m)	Junkosha	MWX241-02000KMSKMS/B	5937	12	14-May-2023
DRG Horn Antenna (7.5-18GHz)	Schwarzbeck	HWRD750	5939	12	29-May-2023
TRILOG Super Broadband Test Antenna	Schwarzbeck	VULB 9168	5944	24	03-Feb-2024
AC Power Source	iTech	AC Power Source	5955	-	TU
5m Semi-Anechoic Chamber (Dual-Axis)	Albatross Projects	RF Chamber 15	5963	36	28-Apr-2025
Compact Antenna Mast	Maturo Gmbh	CAM4.0-P	5964	-	TU
Mast & Turntable Controller	Maturo Gmbh	FCU3.0	5966	-	TU
Tilt Antenna Mast	Maturo Gmbh	BAM4.5-P	5967	-	TU
Turntable	Maturo Gmbh	TT1.5SI	5968	-	TU
Cable (SMA to SMA 1m)	Junkosha	MWX221-01000AMSAMS/A	5996	12	06-Jun-2023
Cable (N to N 1m)	Junkosha	MWX221-01000NMSNMS/B	5999	12	05-Jun-2023
Cable (N to N 7m)	Junkosha	MWX221-07000NMSNMS/B	6005	12	05-Jun-2023
Cable (N to N 8m)	Junkosha	MWX221-08000NMSNMS/A	6006	12	05-Jun-2023
Cable (SMA to SMA 1m)	Junkosha	MWX221-01000AMSAMS/A	6007	12	06-Jun-2023
Cable (SMA to SMA 6.5m)	Junkosha	MWX221-06500AMSAMS/B	6014	12	07-Jun-2023
Cable (SMA to SMA 1m)	Junkosha	MWX221-01000AMSAMS/B	6019	12	07-Jun-2023
Horn Antenna (1-10 GHz)	Schwarzbeck	BBHA9120B	6140	12	21-Jun-2023
Humidity & Temperature meter	R.S Components	1364	6150	12	17-Jun-2023
Double Ridge Active Horn Antenna (18-40 GHz)	Com-Power	AHA-840	6187	24	02-Jun-2024
SAC Switch Unit	TUV SUD	TUV_SSU_001	6191	12	12-Dec-2023
8 GHz Highpass Filter	Wainwright	WHKX 7150 8000 18000 50SS	6195	12	15-Jul-2023
Pre Amp 8 - 18 GHz	Wright Technologies	APS06 0061	6198	12	19-Jul-2023
Attenuator 4dB	Pasternack	PE7074-4	6203	24	16-Jul-2024
Cable (SMA to SMA 20cm)	TUV SUD	MH-FH 8-18	6214	12	25-Jul-2023

Table 71

TU - Traceability Unscheduled



2.5 Authorised Band Edges

2.5.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.247 (d)
ISED RSS-247, Clause 5.5

2.5.2 Equipment Under Test and Modification State

A2786, S/N: GHX3XR3XF7 - Modification State 0

2.5.3 Date of Test

07-November-2022 to 08-December-2022

2.5.4 Test Method

The test was performed in accordance with ANSI C63.10, clause 6.10.4.

2.5.5 Environmental Conditions

Ambient Temperature	19.8 - 23.4 °C
Relative Humidity	40.5 - 60.0 %


2.5.6 Test Results

2.4 GHz WLAN


20 MHz Bandwidth - Core 1 (SISO)

Mode	Data Rate/ MCS	Resource Size	Resource Index	TX Frequency (MHz)	Band Edge Frequency (MHz)	Level (dBc)
802.11b	1 Mbps	-	-	2412	2400	-46.55
802.11g	54 Mbps	-	-	2412	2400	-34.55
802.11n HT20	MCS4	-	-	2412	2400	-34.95
802.11ax HE20	MCS9x1	SU	-	2412	2400	-34.62
802.11ax HE20	MCS9x1	106	53	2412	2400	-35.81


Table 72 - SISO Authorised Band Edge Results

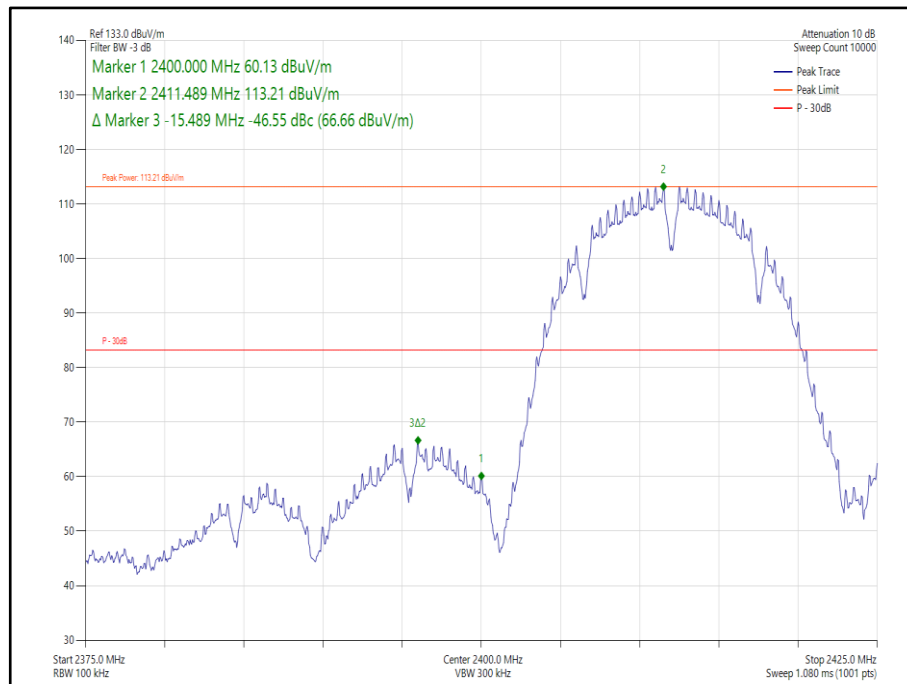


**Figure 106 - 802.11b, SISO, Core 1 - 2412 MHz,
Band Edge Frequency 2400 MHz**

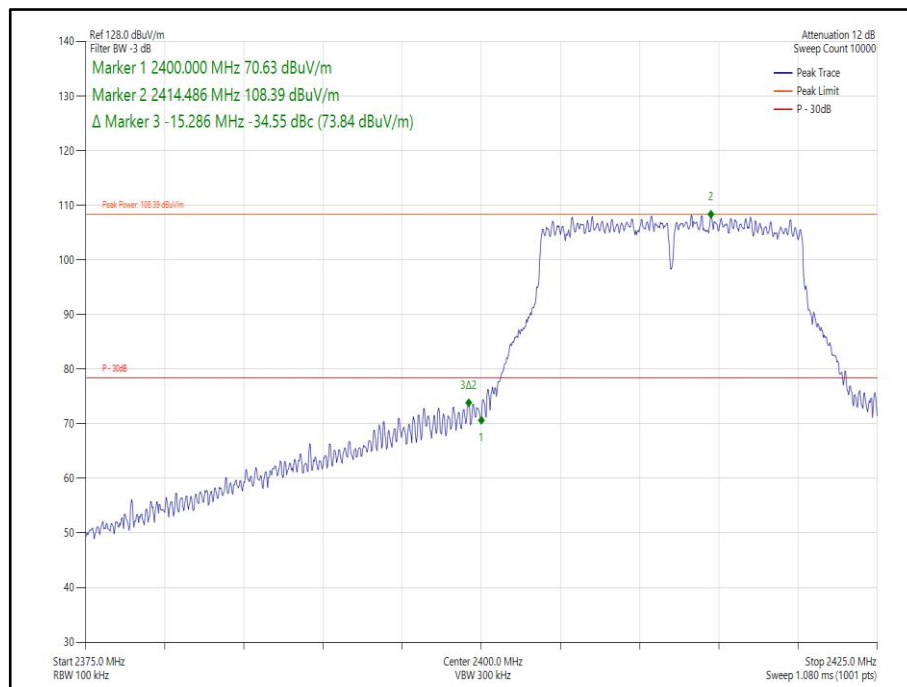


**Figure 107 - 802.11g, SISO, Core 1 - 2412 MHz,
Band Edge Frequency 2400 MHz**

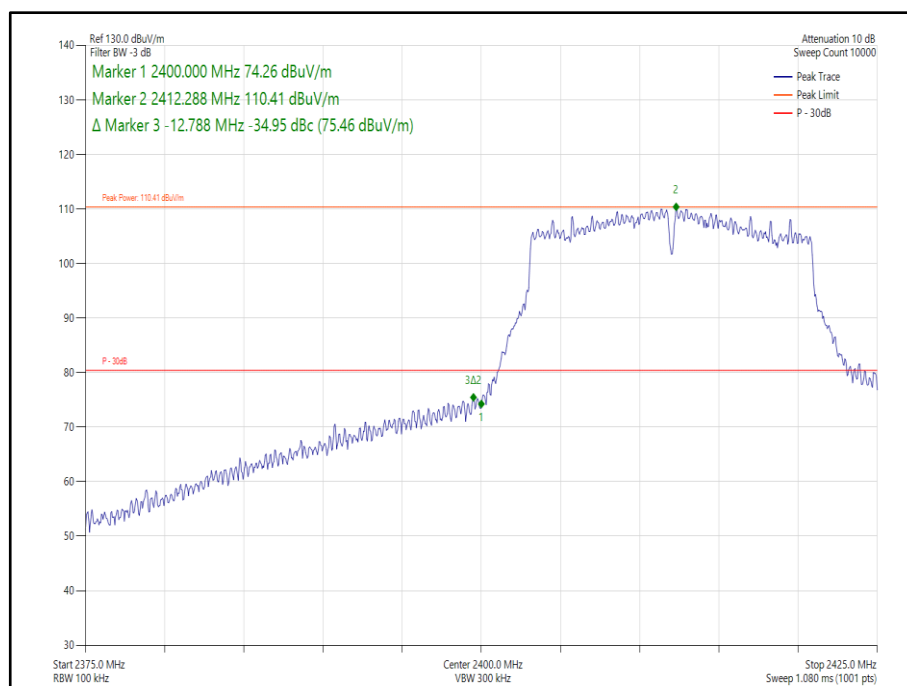

**Figure 108 - 802.11n, HT20, SISO Core 1 - 2412 MHz,
Band Edge Frequency 2400 MHz**

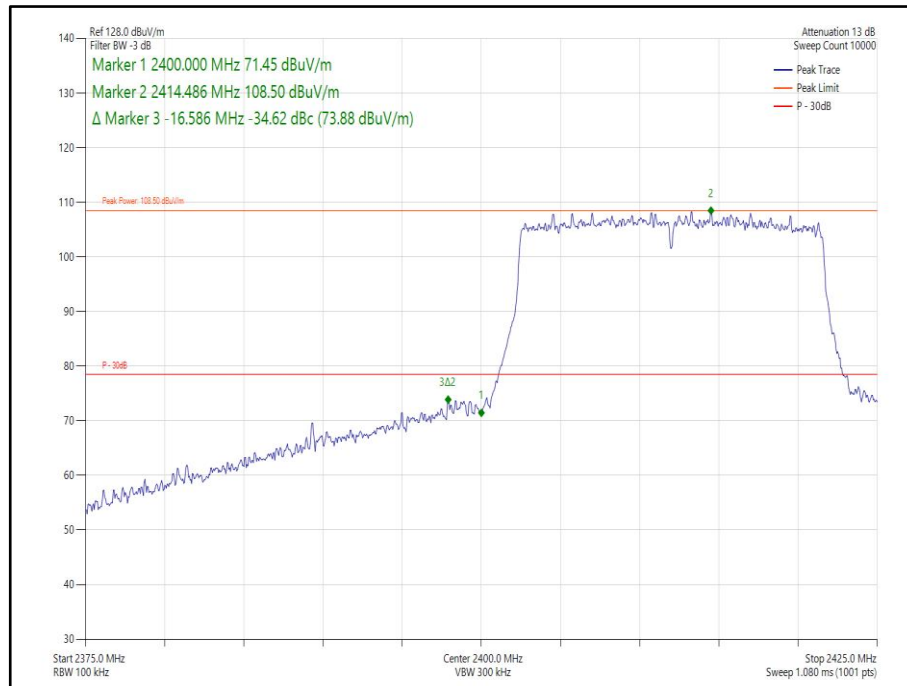

**Figure 109 - 802.11ax, HE20, SU, SISO, Core 1 - 2412 MHz,
Band Edge Frequency 2400 MHz**

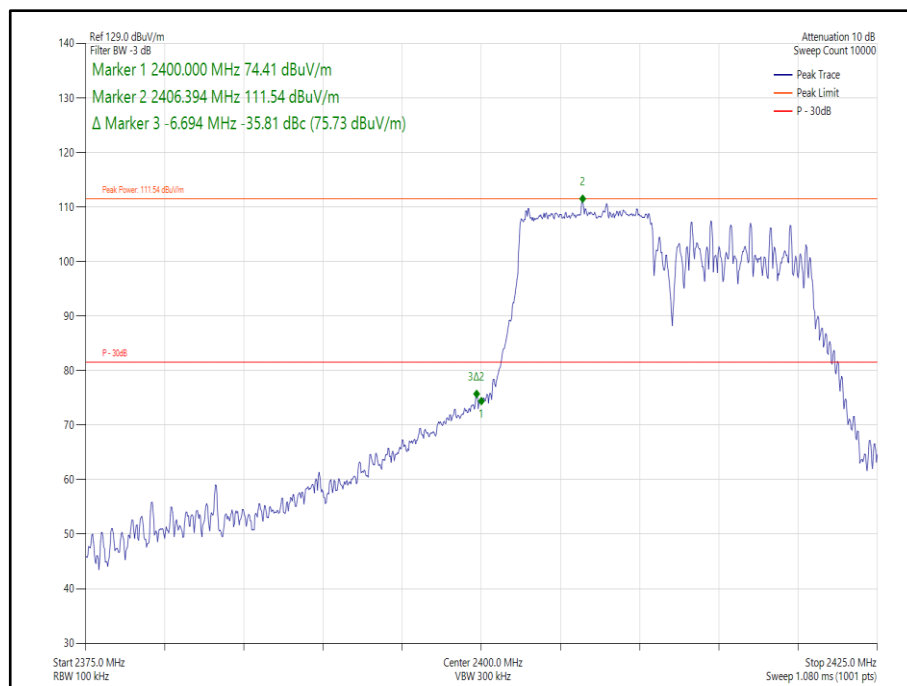


**Figure 110 - 802.11ax, HE20, RU 106-53, SISO, Core 1 - 2412 MHz,
Band Edge Frequency 2400 MHz**


20 MHz Bandwidth - Core 0-1 (CDD)

Mode	Data Rate/ MCS	Resource Size	Resource Index	TX Frequency (MHz)	Band Edge Frequency (MHz)	Level (dBc)
802.11n HT20	MCS7	-	-	2412	2400	-34.68
802.11ax HE20	MCS4x1	SU	-	2412	2400	-34.52
802.11ax HE20	MCS9x1	106	53	2412	2400	-36.54


Table 73 - CDD Authorised Band Edge Results

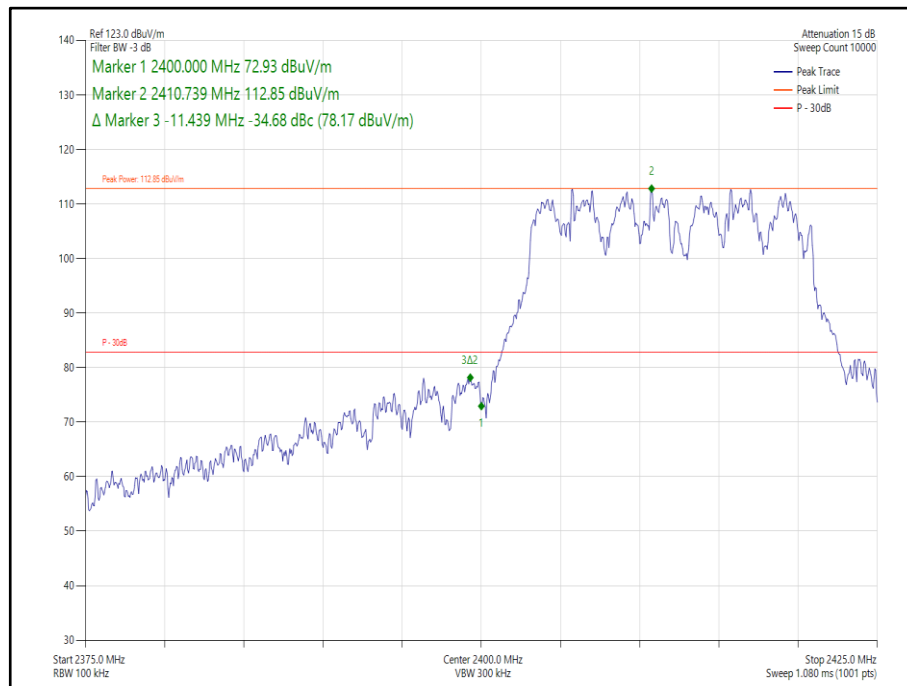

**Figure 111 - 802.11n, HT20, CDD, Core 0-1 - 2412 MHz,
Band Edge Frequency 2400 MHz**

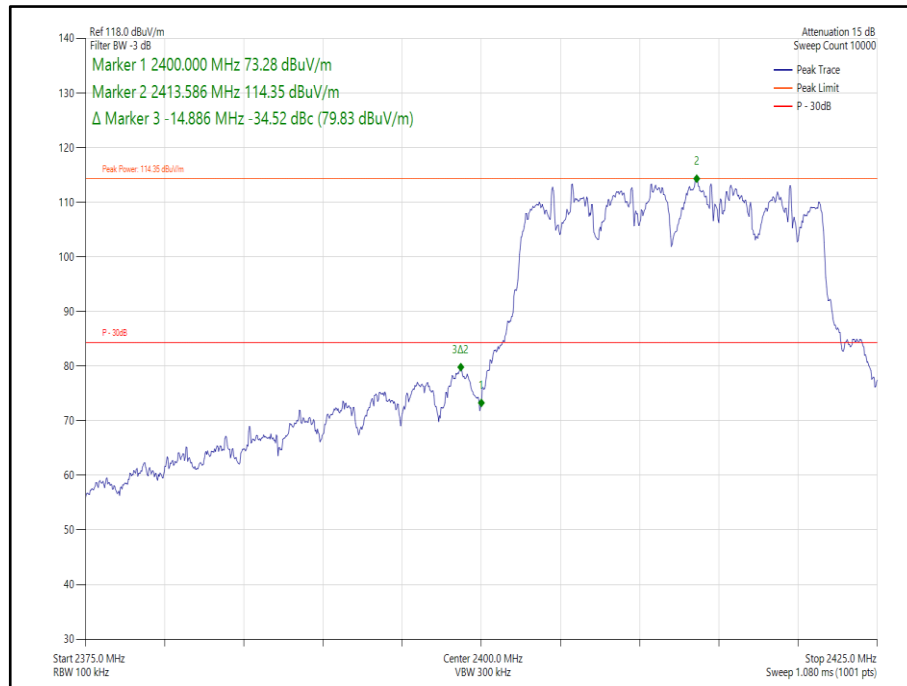

**Figure 112 - 802.11ax, HE20, SU, CDD, Core 0-1 - 2412 MHz,
Band Edge Frequency 2400 MHz**

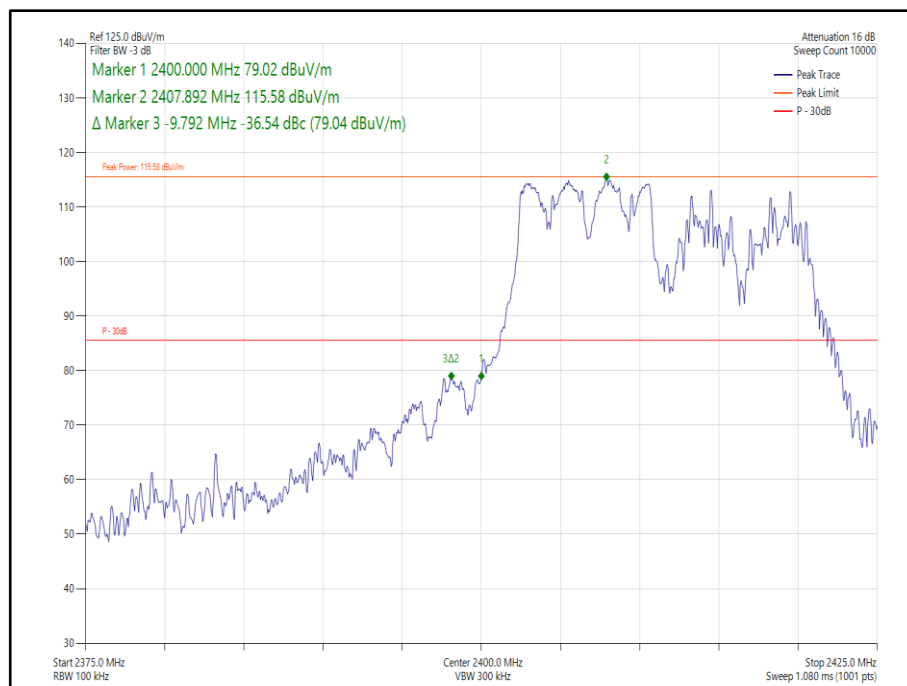

**Figure 113 - 802.11ax, HE20, RU 106-53, CDD, Core 0-1 - 2412 MHz,
Band Edge Frequency 2400 MHz**



FCC 47 CFR Part 15, Limit Clause 15.247 (d)

20 dB below the fundamental measured in a 100 kHz bandwidth using a peak detector. If the transmitter complies with the conducted power limits, based on the use of RMS averaging over a time interval, the attenuation required shall be 30 dB below the fundamental instead of 20 dB.

ISED RSS-247, Limit Clause 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

2.5.7 Test Location and Test Equipment Used

This test was carried out in RF Chamber 15.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
Emissions Software	TUV SUD	EmX V3.1.10	5125	-	Software
Cable (18GHz)	Junkosha	MWX221-04000NMSNMS/B	5262	12	04-Aug-2023
Cable (18 GHz)	Junkosha	MWX221-04000NMSNMS/B	5263	12	28-Feb-2023
EMI Test Receiver	Rohde & Schwarz	ESW44	5911	12	24-Feb-2023
1500W (300V 12A) AC Power Supply	iTech	IT7324	5956	-	O/P Mon
5m Semi-Anechoic Chamber (Dual-Axis)	Albatross Projects	RF Chamber 15	5963	36	28-Apr-2025
Compact Antenna Mast	Maturo Gmbh	CAM4.0-P	5964	-	TU
Mast & Turntable Controller	Maturo Gmbh	FCU3.0	5966	-	TU
Tilt Antenna Mast	Maturo Gmbh	BAM4.5-P	5967	-	TU
Turntable	Maturo Gmbh	TT1.5SI	5968	-	TU
Cable (SMA to SMA 1m)	Junkosha	MWX221-01000AMSAMS/A	6018	12	06-Jun-2023
Horn Antenna (1-10 GHz)	Schwarzbeck	BBHA9120B	6142	12	26-Jun-2023
Multimeter	Fluke	56601818WS	6147	12	16-Jun-2023
Humidity & Temperature meter	R.S Components	1364	6150	12	17-Jun-2023
SAC Switch Unit	TUV SUD	TUV_SSU_001	6190	12	16-Dec-2023
Cable (SMA to SMA 20cm)	TUV SUD	MH-FH 8-18	6220	12	10-Aug-2023

Table 74

TU - Traceability Unscheduled
O/P Mon - Output Monitored using calibrated equipment



2.6 Power Spectral Density

2.6.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.247 (e)
ISED RSS-247, Clause 5.2
ISED RSS-GEN, Clause 6.12

2.6.2 Equipment Under Test and Modification State

A2786, S/N: L217XQ106H - Modification State 0

2.6.3 Date of Test

20-January-2023 to 08-February-2023

2.6.4 Test Method

This test was performed in accordance with ANSI C63.10, clause 11.10.5.

The spectrum analyser was set to trace (power) averaging and a duty cycle correction was added as calculated in the result tables below (Method AVGPSD-2).

MIMO output port summing was performed in accordance with KDB 662911 D01 E)2)b).

2.6.5 Environmental Conditions

Ambient Temperature	21.7 - 22.7 °C
Relative Humidity	26.6 - 28.0 %



2.6.6 Test Results

2.4 GHz WLAN

SISO

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (e) RSS-247 5.2 b)	Test Method(s):	C63.10 11.10.5
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11b	Duty Cycle (%):	99.4
Data Rate:	1 Mbps	DCCF (dB):	0.03
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	Σ		
2412	100.0	-	2.33	-	-	-	8.00	-5.67
2442	100.0	-	1.68	-	-	-	8.00	-6.32
2472	100.0	-	-1.86	-	-	-	8.00	-9.86

Table 75 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (e) RSS-247 5.2 b)	Test Method(s):	C63.10 11.10.5
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11g	Duty Cycle (%):	97.6
Data Rate:	12 Mbps	DCCF (dB):	0.11
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	Σ		
2412	100.0	-	-2.96	-	-	-	8.00	-10.96
2442	100.0	-	3.96	-	-	-	8.00	-4.04
2472	100.0	-	-11.94	-	-	-	8.00	-19.94

Table 76 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (e) RSS-247 5.2 b)	Test Method(s):	C63.10 11.10.5
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	96.5
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.15
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	Σ		
2412	100.0	-	-3.31	-	-	-	8.00	-11.31
2442	100.0	-	3.95	-	-	-	8.00	-4.05
2472	100.0	-	-12.31	-	-	-	8.00	-20.31

Table 77 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (e) RSS-247 5.2 b)	Test Method(s):	C63.10 11.10.5
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	95.8
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.19
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	Σ		
2412	100.0	-	-5.79	-	-	-	8.00	-13.79
2442	100.0	-	2.68	-	-	-	8.00	-5.32
2472	100.0	-	-15.28	-	-	-	8.00	-23.28

Table 78 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (e) RSS-247 5.2 b)	Test Method(s):	C63.10 11.10.5
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU26	Duty Cycle (%):	96.6
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.15
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	Σ		
2412	100.0	-	-0.79	-	-	-	8.00	-8.79
2442	100.0	-	1.54	-	-	-	8.00	-6.46
2472	100.0	-	-19.02	-	-	-	8.00	-27.02

Table 79 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (e) RSS-247 5.2 b)	Test Method(s):	C63.10 11.10.5
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	96.3
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.16
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	Σ		
2412	100.0	-	-3.41	-	-	-	8.00	-11.41
2442	100.0	-	1.91	-	-	-	8.00	-6.09
2472	100.0	-	-19.99	-	-	-	8.00	-27.99

Table 80 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (e) RSS-247 5.2 b)	Test Method(s):	C63.10 11.10.5
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	97.9
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.09
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	Σ		
2412	100.0	-	-6.35	-	-	-	8.00	-14.35
2442	100.0	-	1.96	-	-	-	8.00	-6.04
2472	100.0	-	-21.05	-	-	-	8.00	-29.05

Table 81 - Maximum Power Spectral Density Results



MIMO CDD

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (e) RSS-247 5.2 b)	Test Method(s):	C63.10 11.10.5
Additional Reference(s):	KDB-662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	96.5
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.15
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	Σ		
2412	100.0	-3.51	-4.50	-	-	-0.97	8.00	-8.97
2442	51.0	1.44	1.40	-	-	4.43	8.00	-3.57
2472	100.0	-14.16	-14.34	-	-	-11.24	8.00	-19.24

Table 82 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (e) RSS-247 5.2 b)	Test Method(s):	C63.10 11.10.5
Additional Reference(s):	KDB-662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	95.8
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.19
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	Σ		
2412	100.0	-5.97	-6.50	-	-	-3.22	8.00	-11.22
2437	51.0	-0.43	-0.77	-	-	2.41	8.00	-5.59
2472	100.0	-16.61	-16.49	-	-	-13.54	8.00	-21.54

Table 83 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (e) RSS-247 5.2 b)	Test Method(s):	C63.10 11.10.5
Additional Reference(s):	KDB-662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU26	Duty Cycle (%):	96.6
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.15
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	Σ		
2412	100.0	-1.02	-1.28	-	-	1.86	8.00	-6.14
2442	51.0	-1.06	-0.94	-	-	2.01	8.00	-5.99
2472	100.0	-20.35	-20.82	-	-	-17.57	8.00	-25.57

Table 84 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (e) RSS-247 5.2 b)	Test Method(s):	C63.10 11.10.5
Additional Reference(s):	KDB-662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	96.3
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.16
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	Σ		
2412	100.0	-3.94	-3.87	-	-	-0.89	8.00	-8.89
2442	51.0	-0.59	-0.93	-	-	2.26	8.00	-5.74
2472	100.0	-21.81	-22.45	-	-	-19.11	8.00	-27.11

Table 85 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (e) RSS-247 5.2 b)	Test Method(s):	C63.10 11.10.5
Additional Reference(s):	KDB-662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	97.9
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.09
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	Σ		
2412	100.0	-6.54	-6.65	-	-	-3.59	8.00	-11.59
2442	51.0	-0.64	-1.17	-	-	2.11	8.00	-5.89
2472	100.0	-22.48	-22.81	-	-	-19.63	8.00	-27.63

Table 86 - Maximum Power Spectral Density Results

FCC 47 CFR Part 15, Limit Clause 15.247 (e)

The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

ISED RSS-247, Limit Clause 5.2(b)

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission



2.6.7 Test Location and Test Equipment Used

This test was carried out in RF Laboratory 14.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
Hygrometer	Rotronic	I-1000	3068	12	21-Sep-2023
Multi-GNSS Simulator (GPS)	Spirent	GSS6700	4596	12	22-Aug-2023
AC Programmable Power Supply	iTech	IT7324	5225	-	O/P Mon
MXA Signal Analyser	Keysight Technologies	N9020B	5529	24	13-Dec-2024
Signal Conditioning Unit	TUV SUD	SPECTRUM SCU001	5546	12	06-Apr-2023
Digital Multimeter	Fluke	115	6145	12	17-Jun-2023

Table 87

O/P Mon – Output Monitored using calibrated equipment



3 Measurement Uncertainty

For a 95% confidence level, the measurement uncertainties for defined systems are:

Test Name	Measurement Uncertainty
Restricted Band Edges	30 MHz to 1 GHz: ± 5.2 dB 1 GHz to 40 GHz: ± 6.3 dB
Emission Bandwidth	± 545.656 kHz
Maximum Conducted Output Power	± 3.2 dB
Spurious Radiated Emissions	30 MHz to 1 GHz: ± 5.2 dB 1 GHz to 40 GHz: ± 6.3 dB
Authorised Band Edges	30 MHz to 1 GHz: ± 5.2 dB 1 GHz to 40 GHz: ± 6.3 dB
Power Spectral Density	± 3.2 dB

Table 88

Measurement Uncertainty Decision Rule – Accuracy Method

Determination of conformity with the specification limits is based on the decision rule according to IEC Guide 115:2021, Clause 4.4.3 (Procedure 2). The measurement results are directly compared with the test limit to determine conformance with the requirements of the standard.

Risk: The uncertainty of measurement about the measured result is negligible with regard to the final pass/fail decision. The measurement result can be directly compared with the test limit to determine conformance with the requirement (compare IEC Guide 115). The level of risk to falsely accept and falsely reject items is further described in ILAC-G8.