




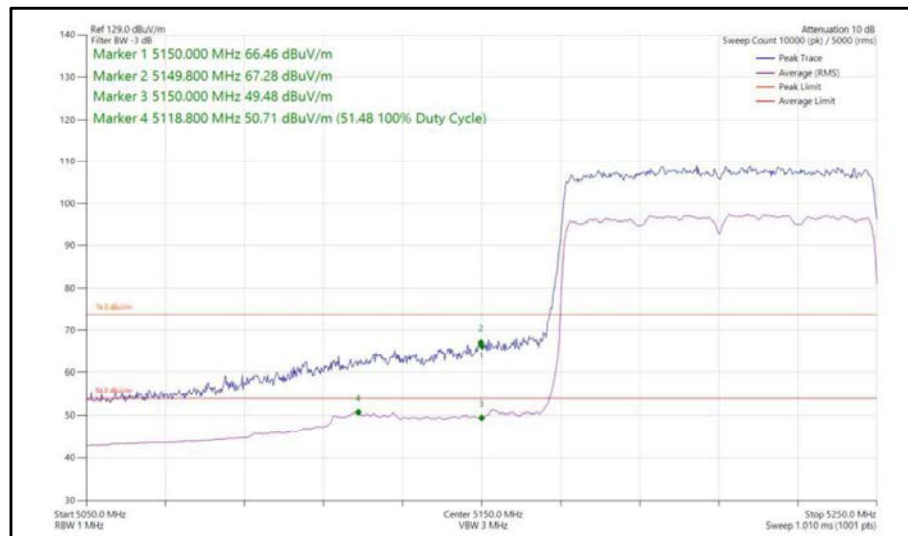


**Figure 121 - 802.11ax, HE80, SU, SDM, Core 0-1 - 5210 MHz,
Band Edge Frequency 5150 MHz**

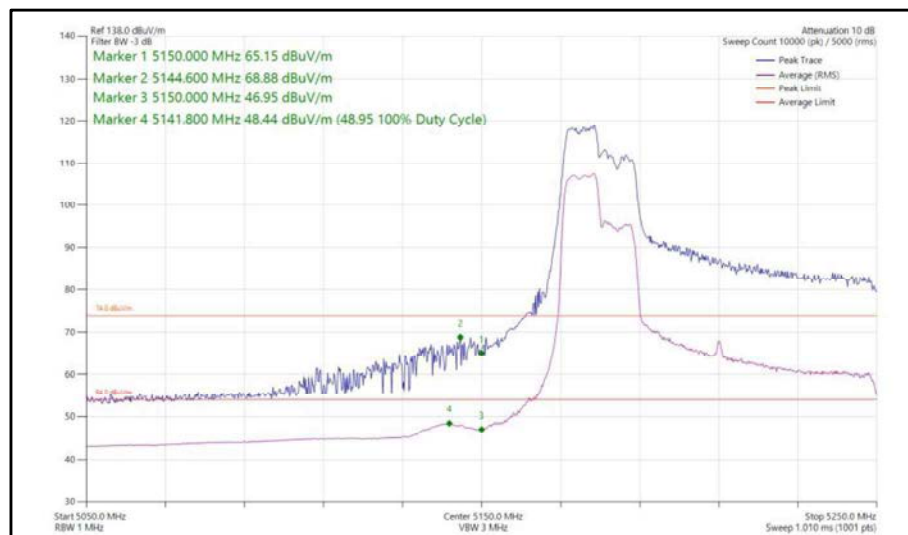


**Figure 122 - 802.11ax, HE80, RU 106-53, SDM, Core 0-1 - 5210 MHz,
Band Edge Frequency 5150 MHz**

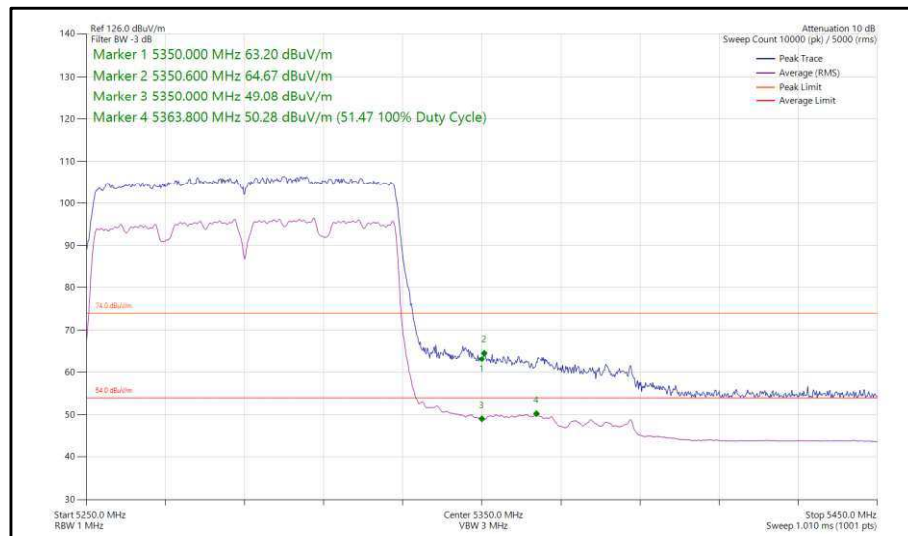


**Figure 123 - 802.11ac, VHT80, SDM, Core 0-1 - 5290 MHz,
Band Edge Frequency 5350 MHz**

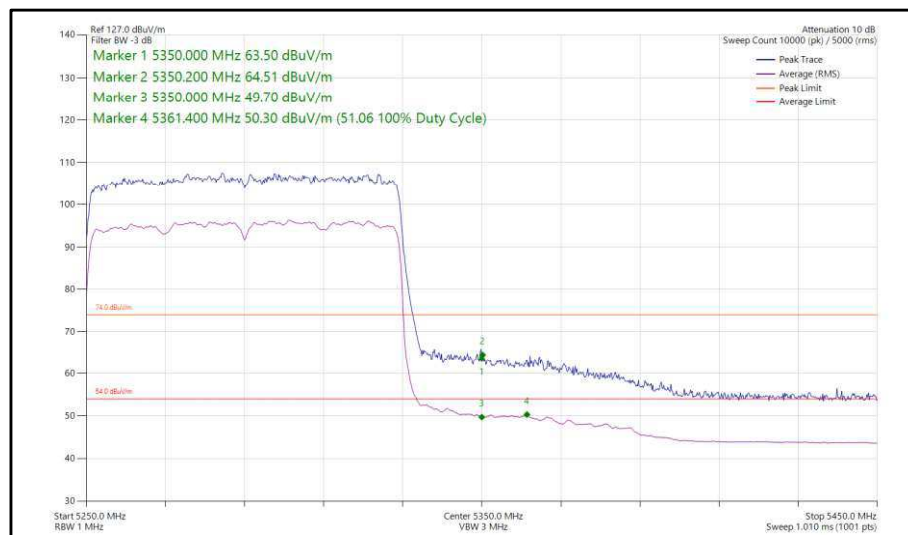


**Figure 124 - 802.11ax, HE80, SU, SDM, Core 0-1 - 5290 MHz,
Band Edge Frequency 5350 MHz**

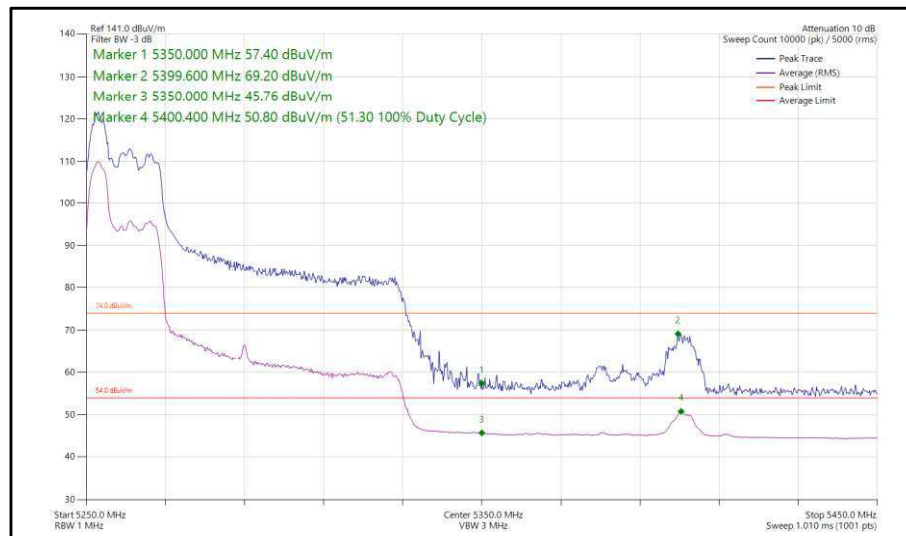


**Figure 125 - 802.11ax, HE80, RU 52-37, SDM, Core 0-1 - 5290 MHz,
Band Edge Frequency 5350 MHz**

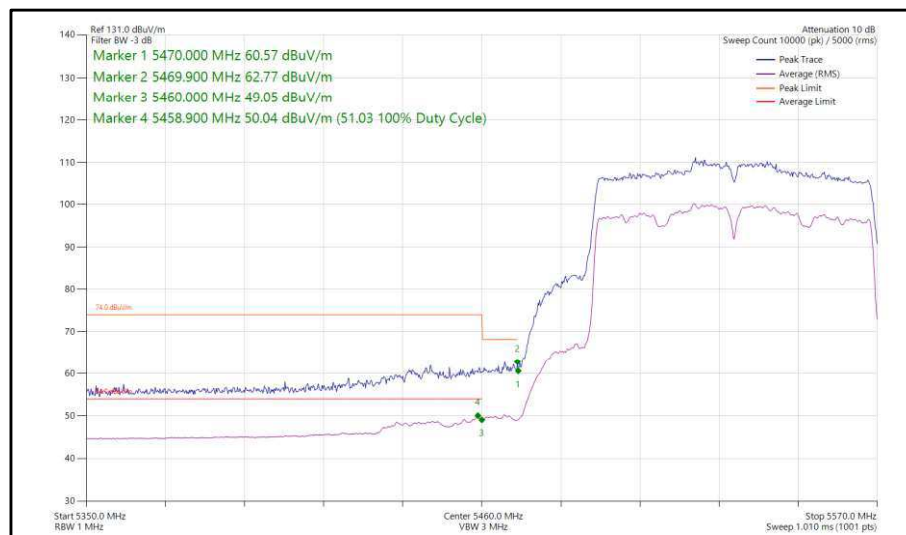

**Figure 126 - 802.11ac, VHT80, SDM, Core 0-1 - 5530 MHz,
Band Edge Frequency 5460 MHz**

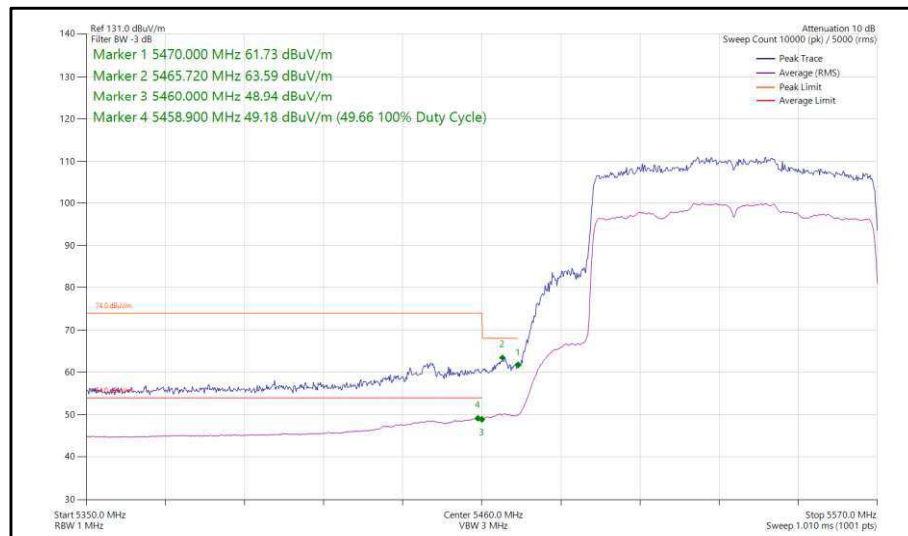

**Figure 127 - 802.11ax, HE80, SU, SDM, Core 0-1 - 5530 MHz,
Band Edge Frequency 5460 MHz**

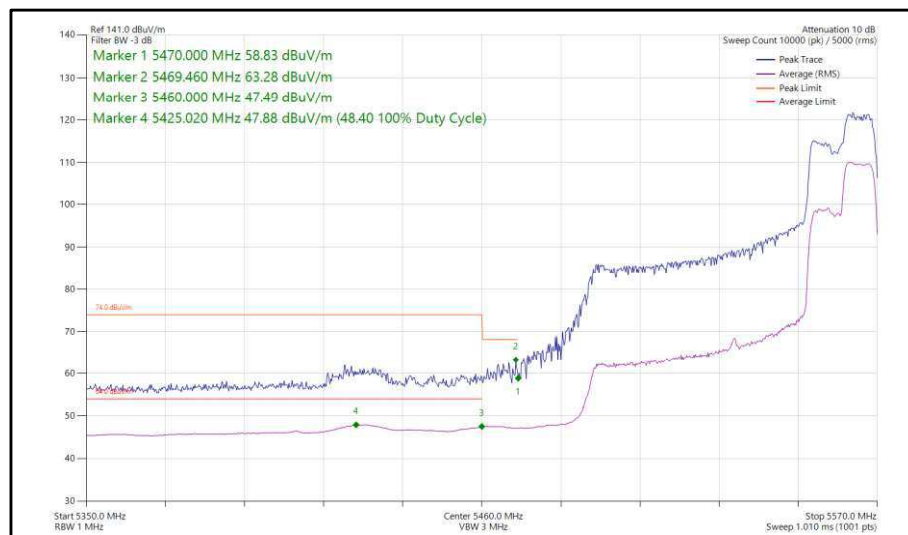

**Figure 128 - 802.11ax, HE80, RU 106-60, SDM, Core 0-1 - 5530 MHz,
Band Edge Frequency 5460 MHz**

80 MHz Bandwidth - Core 0-1 (TxBF)

Mode	Data Rate/ MCS	Resource Size	Resource Index	TX Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dBμV/m)	Average Level (dBμV/m)
802.11ac VHT80	MCS4x1	-	-	5210	5150	62.99	50.84
802.11ac VHT80	MCS2x1	-	-	5290	5350	60.09	49.08
802.11ac VHT80	MCS2x1	-	-	5530	5460	62.27	48.59

Table 20 - TxBF Restricted Band Edge Results

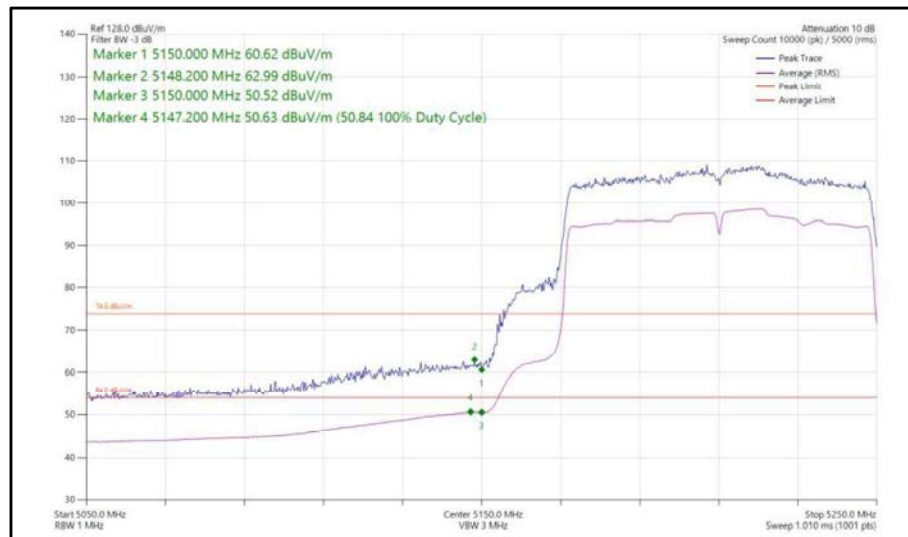


Figure 129 - 802.11ac, VHT80, TxBF, Core 0-1 - 5210 MHz,
Band Edge Frequency 5150 MHz


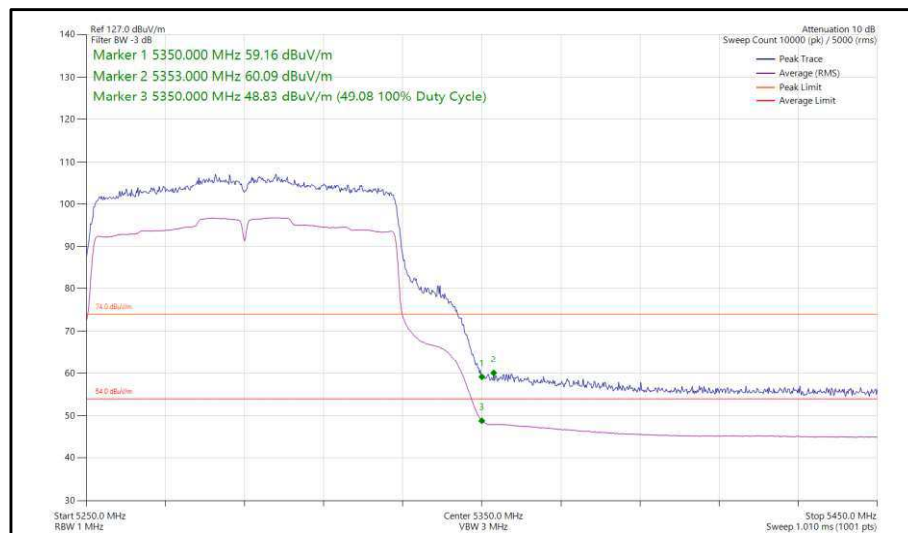


Figure 130 - 802.11ac, VHT80, TxBF, Core 0-1 - 5290 MHz,
Band Edge Frequency 5350 MHz

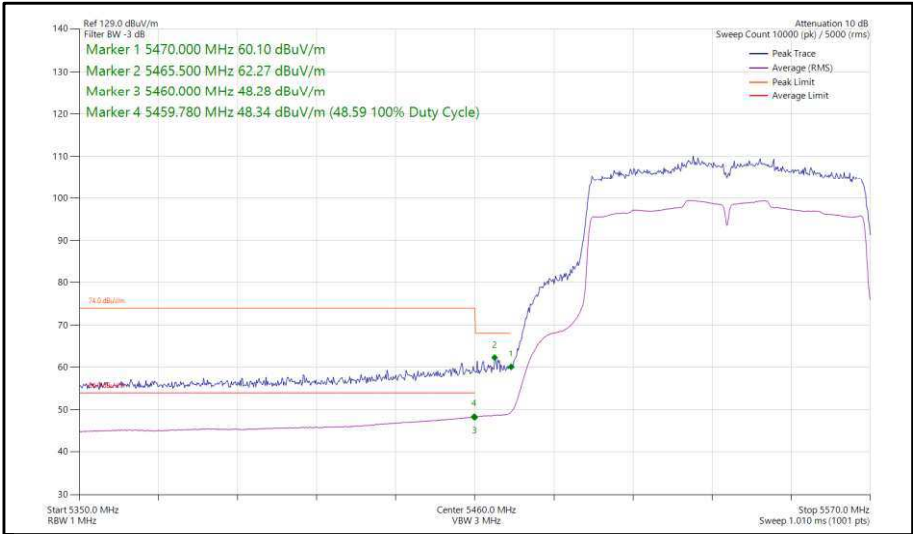


**Figure 131 - 802.11ac, VHT80, TxBF, Core 0-1 - 5530 MHz,
Band Edge Frequency 5460 MHz**


160 MHz Bandwidth - Core 0 (SISO)

Mode	Data Rate/ MCS	Resource Size	Resource Index	TX Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dBμV/m)	Average Level (dBμV/m)
802.11ac VHT160	MCS4x1	-	-	5250	5150	63.96	51.44
802.11ax HE160	MCS2x1	SU	-	5250	5150	63.09	51.46
802.11ax HE160	MCS11x1	106	53	5250	5150	69.00	48.18
802.11ac VHT160	MCS4x1	-	-	5250	5350	64.18	51.47
802.11ax HE160	MCS11x1	SU	-	5250	5350	65.27	51.37
802.11ax HE160	MCS11x1	52	52	5250	5350	68.67	48.51
802.11ac VHT160	MCS4x1	-	-	5570	5460	60.88	51.41
802.11ax HE160	MCS2x1	SU	-	5570	5460	62.30	51.48
802.11ax HE160	MCS11x1	106	53	5570	5460	63.60	48.42


Table 21 - SISO Restricted Band Edge Results

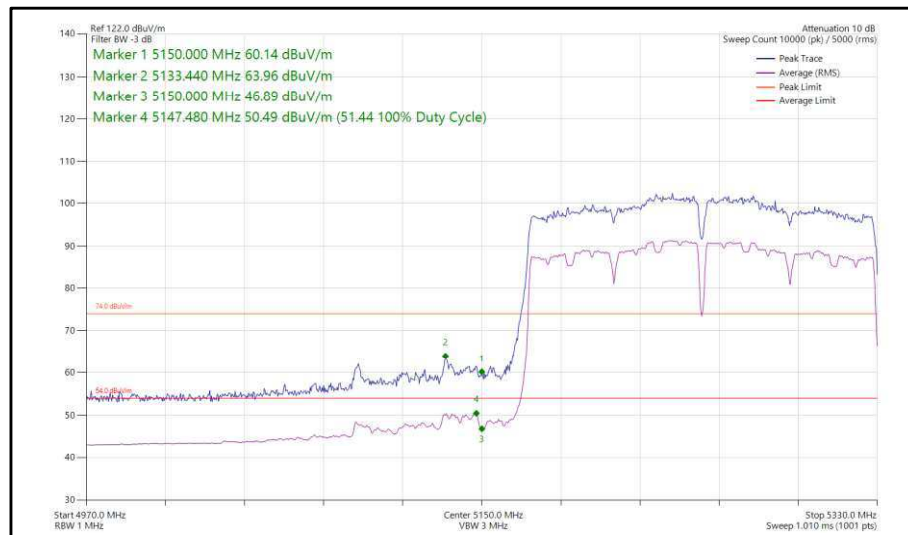


**Figure 132 - 802.11ac, VHT160, SISO, Core 0 - 5250 MHz,
Band Edge Frequency 5150 MHz**

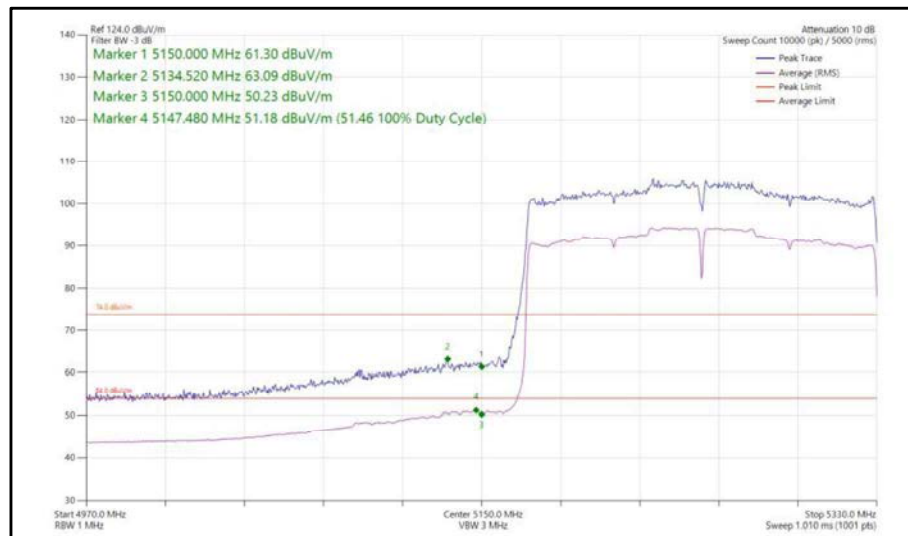


**Figure 133 - 802.11ax, HE160, SU, SISO, Core 0 - 5250 MHz,
Band Edge Frequency 5150 MHz**

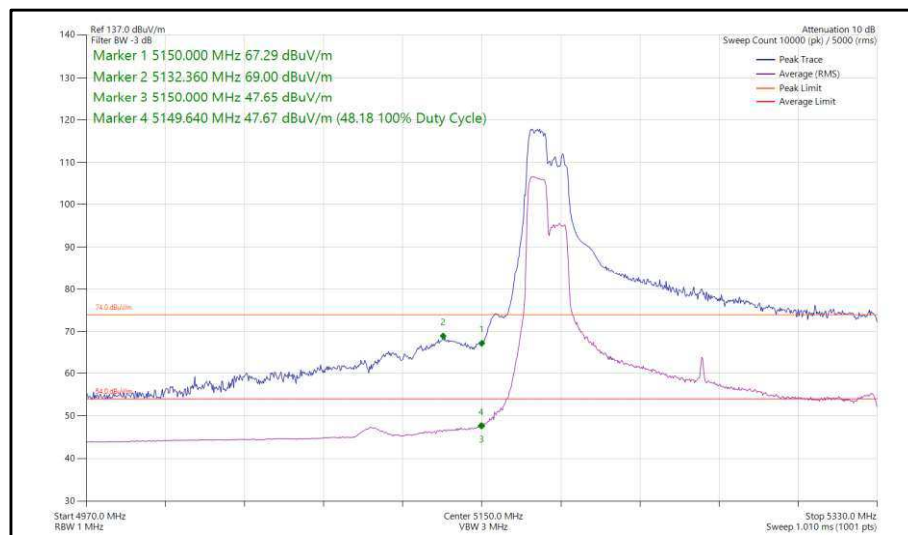


**Figure 134 - 802.11ax, HE160, RU 106-53, SISO, Core 0 - 5250 MHz,
Band Edge Frequency 5150 MHz**

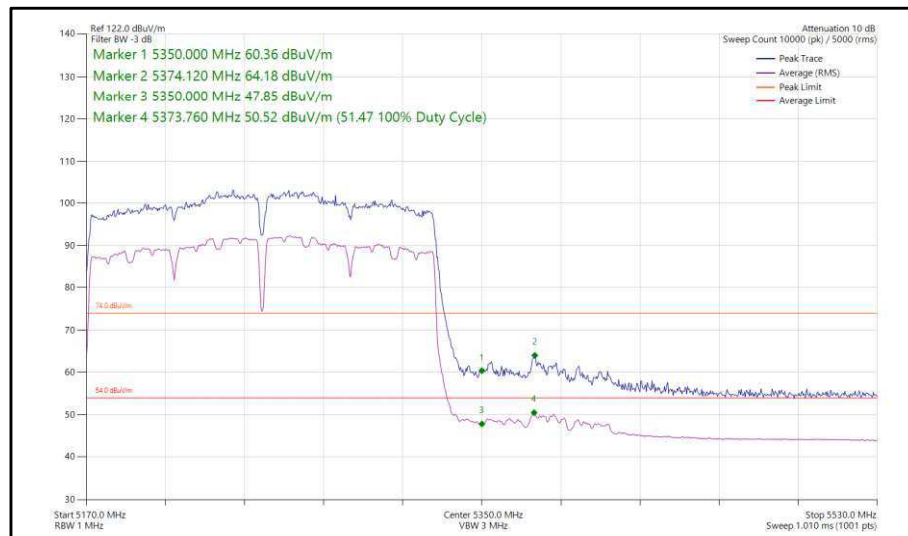


**Figure 135 - 802.11ac, VHT160, SISO, Core 0 - 5250 MHz,
Band Edge Frequency 5350 MHz**

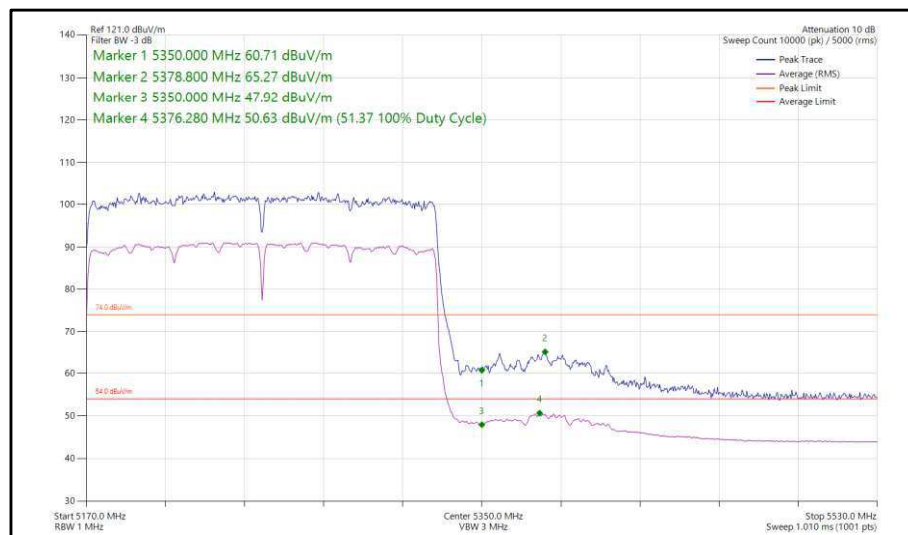


**Figure 136 - 802.11ax, HE160, SU, SISO, Core 0 - 5250 MHz,
Band Edge Frequency 5350 MHz**

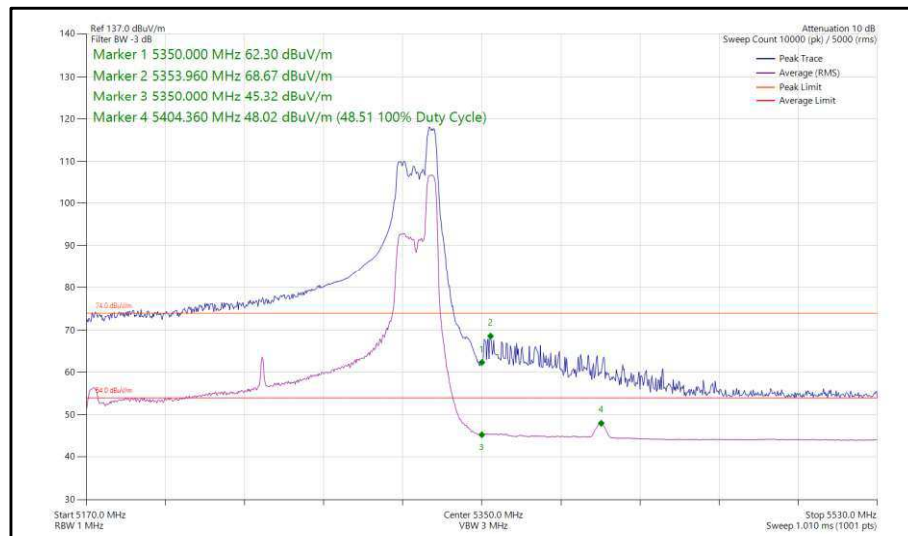


**Figure 137 - 802.11ax, HE160, RU 52-52, SISO, Core 0 - 5250 MHz,
Band Edge Frequency 5350 MHz**

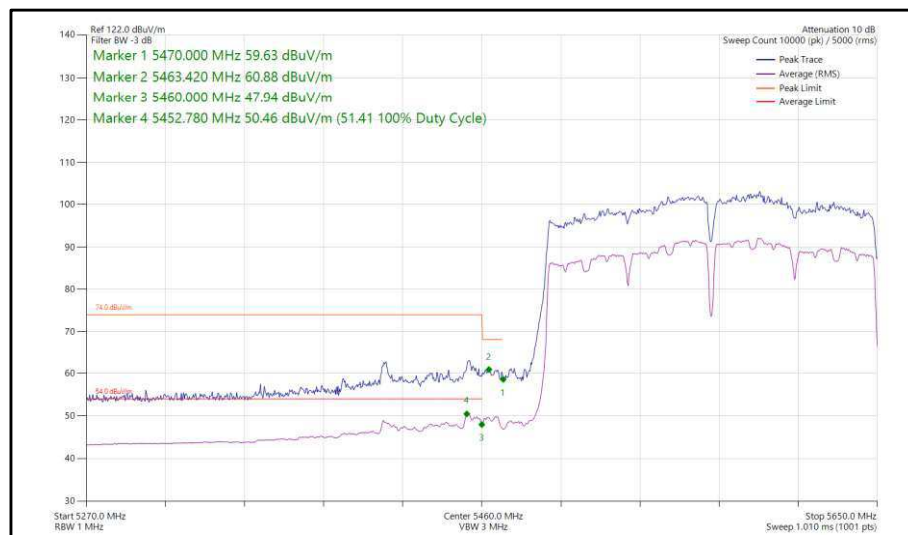

**Figure 138 - 802.11ac, VHT160, SISO, Core 0 - 5570 MHz,
Band Edge Frequency 5460 MHz**

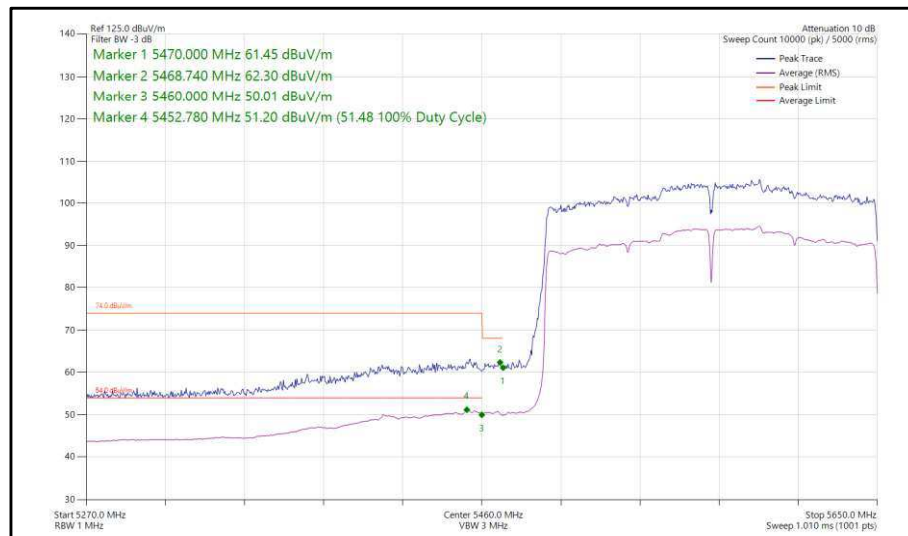

**Figure 139 - 802.11ax, HE160, SU, SISO, Core 0 - 5570 MHz,
Band Edge Frequency 5460 MHz**

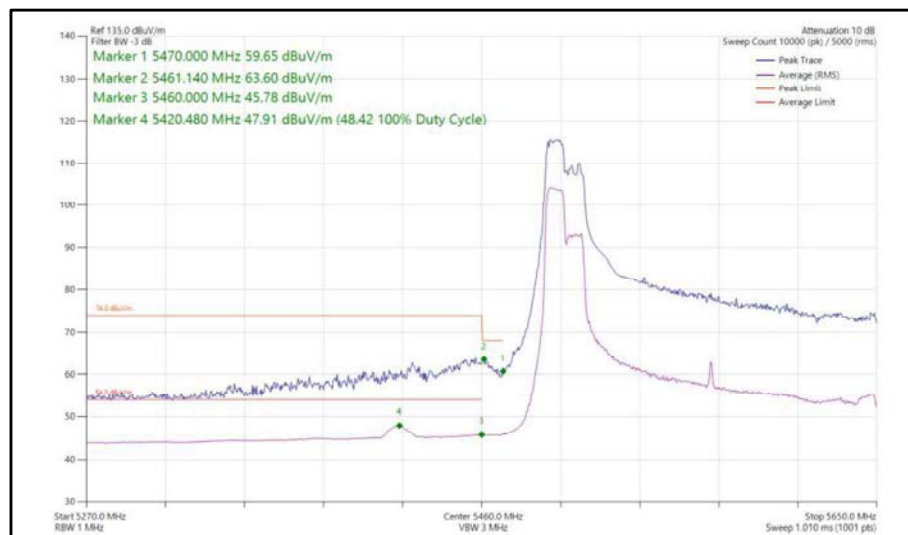


**Figure 140 - 802.11ax, HE160, RU 106-53, SISO, Core 0 - 5570 MHz,
Band Edge Frequency 5460 MHz**




160 MHz Bandwidth - Core 1 (SISO)

Mode	Data Rate/ MCS	Resource Size	Resource Index	TX Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dBμV/m)	Average Level (dBμV/m)
802.11ac VHT160	MCS7x1	-	-	5250	5150	62.21	50.97
802.11ax HE160	MCS4x1	SU	-	5250	5150	62.86	51.50
802.11ax HE160	MCS11x1	52	37	5250	5150	67.68	51.38
802.11ac VHT160	MCS2x1	-	-	5250	5350	61.89	51.25
802.11ax HE160	MCS11x1	SU	-	5250	5350	64.59	51.26
802.11ax HE160	MCS11x1	106	60	5250	5350	69.45	49.01
802.11ac VHT160	MCS2x1	-	-	5570	5460	61.39	51.19
802.11ax HE160	MCS11x1	SU	-	5570	5460	62.67	51.32
802.11ax HE160	MCS11x1	106	53	5570	5460	63.31	47.22


Table 22 - SISO Restricted Band Edge Results

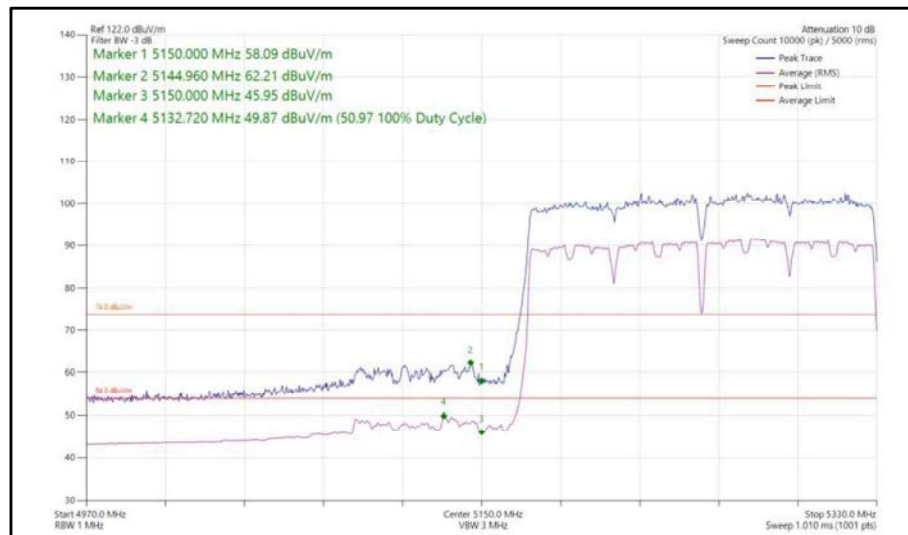

**Figure 141 - 802.11ac, VHT160, SISO, Core 1 - 5250 MHz,
Band Edge Frequency 5150 MHz**

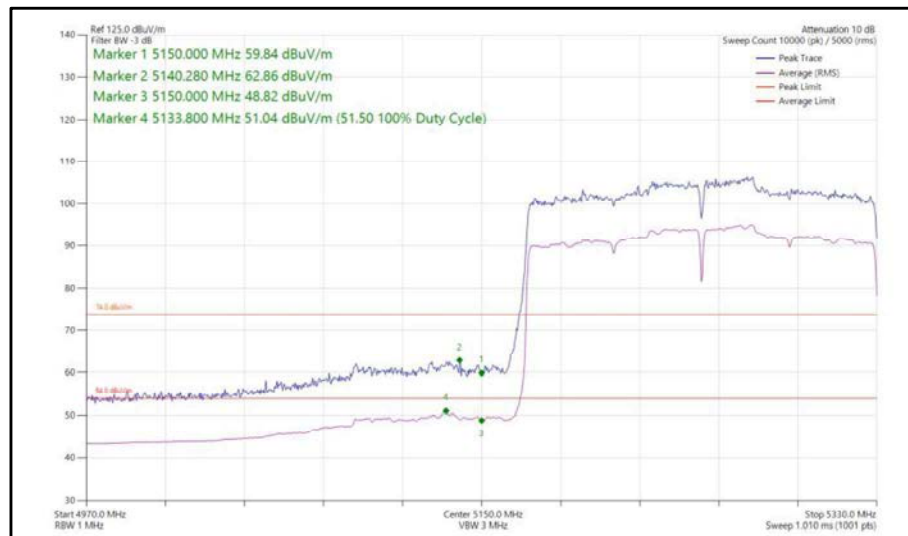

**Figure 142 - 802.11ax, HE160, SU, SISO, Core 1 - 5250 MHz,
Band Edge Frequency 5150 MHz**

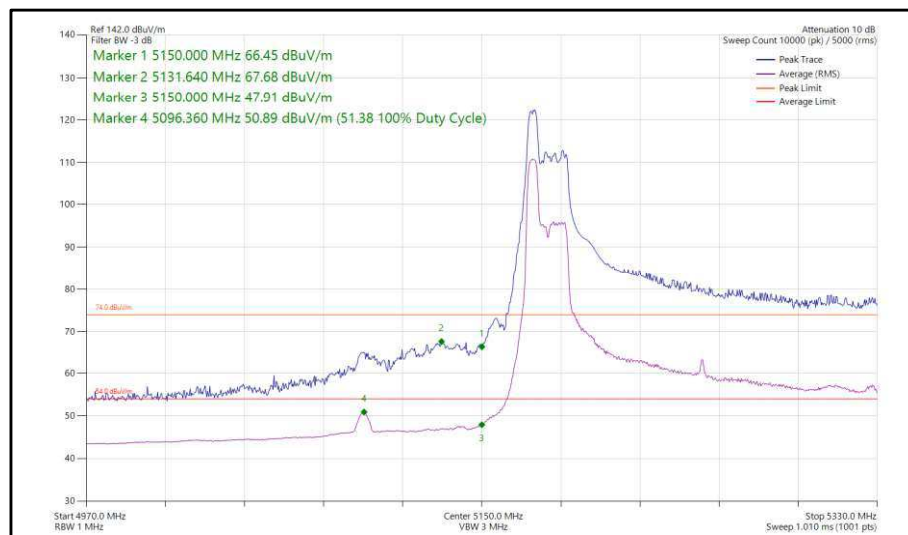

**Figure 143 - 802.11ax, HE160, RU 52-37, SISO, Core 1 - 5250 MHz,
Band Edge Frequency 5150 MHz**

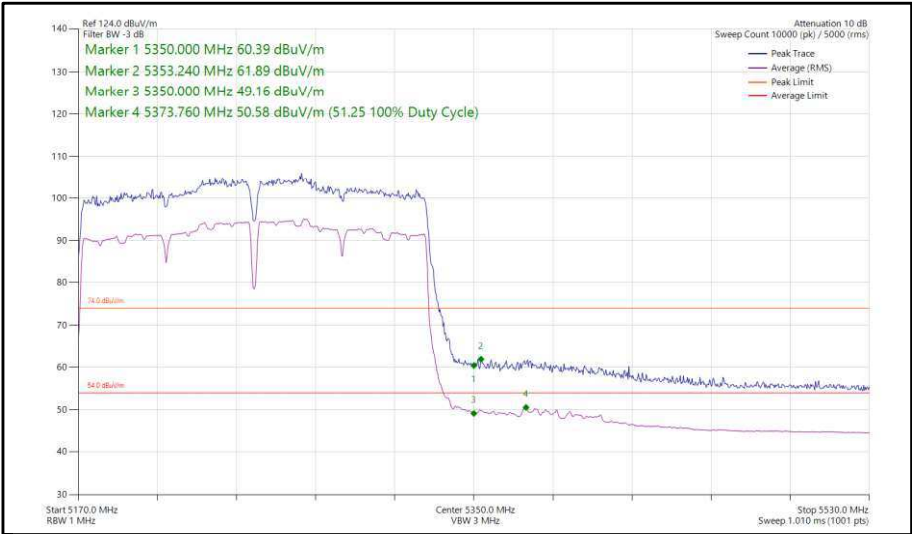


Figure 144 - 802.11ac, VHT160, SISO, Core 1 - 5250 MHz,
Band Edge Frequency 5350 MHz



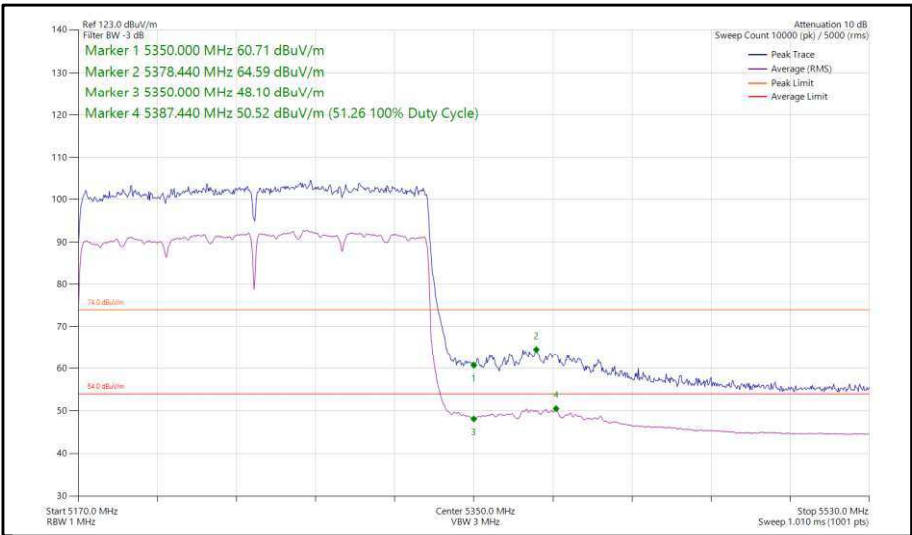



Figure 145 - 802.11ax, HE160, SU, SISO, Core 1 - 5250 MHz,
Band Edge Frequency 5350 MHz

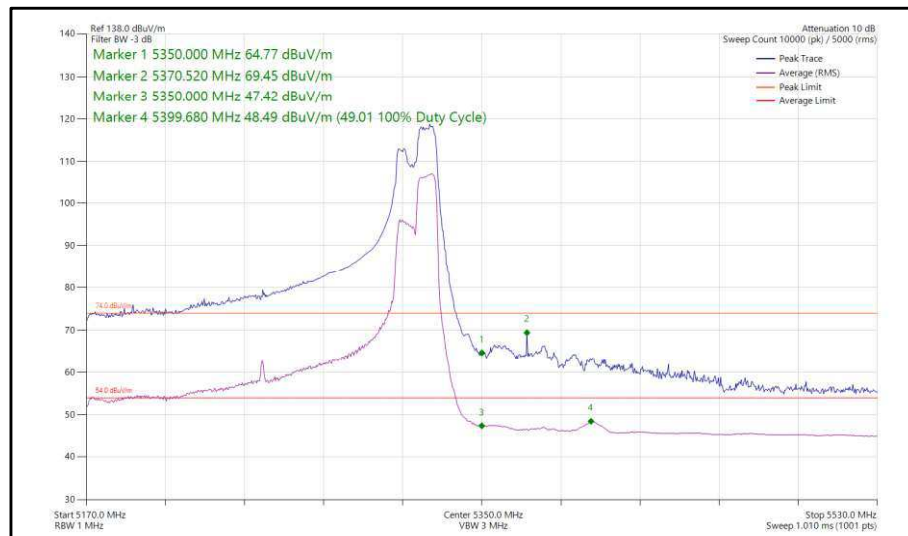


**Figure 146 - 802.11ax, HE160, RU 106-60, SISO, Core 1 - 5250 MHz,
Band Edge Frequency 5350 MHz**

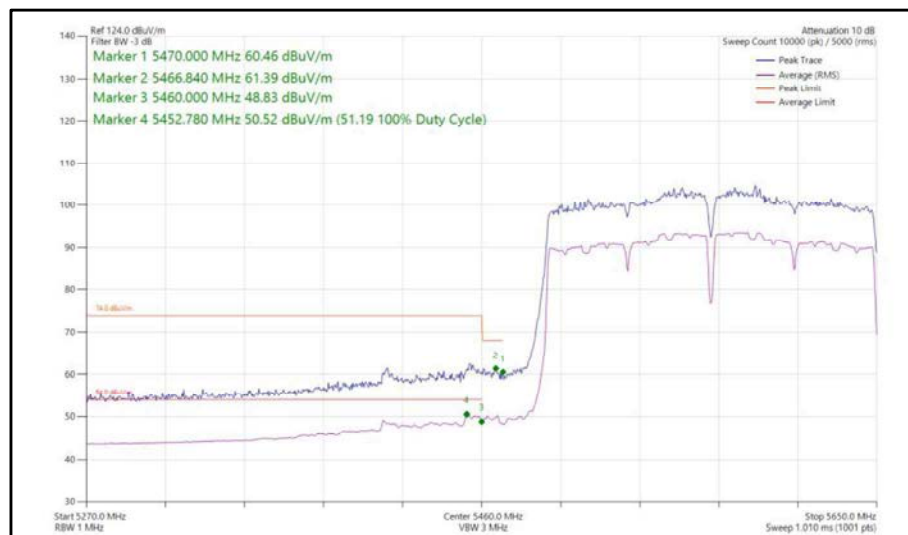

**Figure 147 - 802.11ac, VHT160, SISO, Core 1 - 5570 MHz,
Band Edge Frequency 5460 MHz**

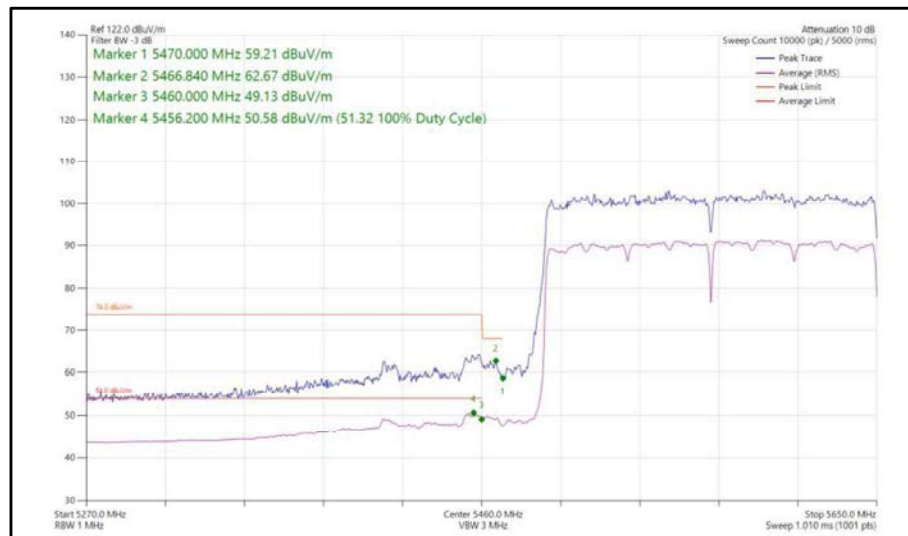

**Figure 148 - 802.11ax, HE160, SU, SISO, Core 1 - 5570 MHz,
Band Edge Frequency 5460 MHz**

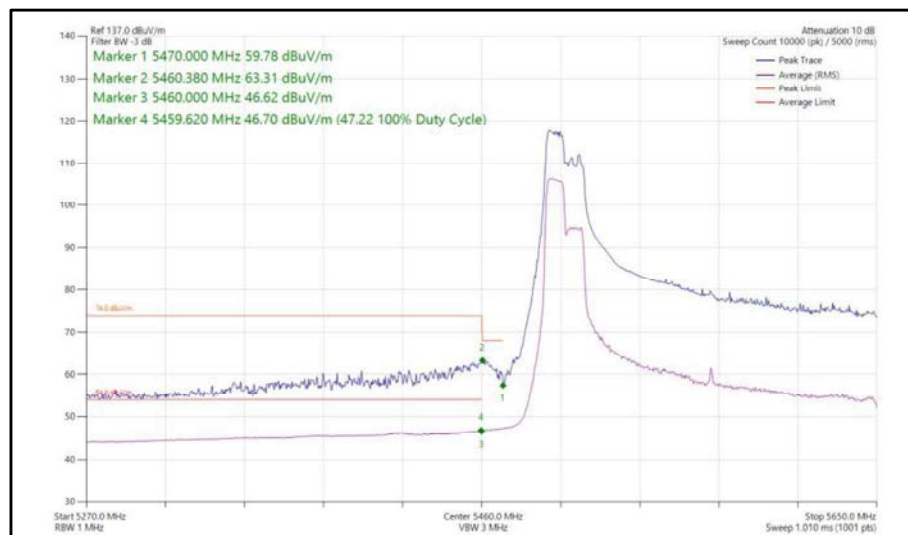


**Figure 149 - 802.11ax, HE160, RU 106-53, SISO, Core 1 - 5570 MHz,
Band Edge Frequency 5460 MHz**


160 MHz Bandwidth - Core 0-1 (CDD)

Mode	Data Rate/ MCS	Resource Size	Resource Index	TX Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dBμV/m)	Average Level (dBμV/m)
802.11ac VHT160	MCS4x1	-	-	5250	5150	63.16	51.31
802.11ax HE160	MCS2x1	SU	-	5250	5150	63.01	51.49
802.11ax HE160	MCS11x1	52	37	5250	5150	66.40	51.34
802.11ac VHT160	MCS2x1	-	-	5250	5350	62.33	51.26
802.11ax HE160	MCS4x1	SU	-	5250	5350	64.18	51.42
802.11ax HE160	MCS11x1	52	52	5250	5350	67.25	51.16
802.11ac VHT160	MCS7x1	-	-	5570	5460	63.44	51.35
802.11ax HE160	MCS2x1	SU	-	5570	5460	63.17	51.40
802.11ax HE160	MCS11x1	52	37	5570	5460	63.20	49.95


Table 23 - CDD Restricted Band Edge Results

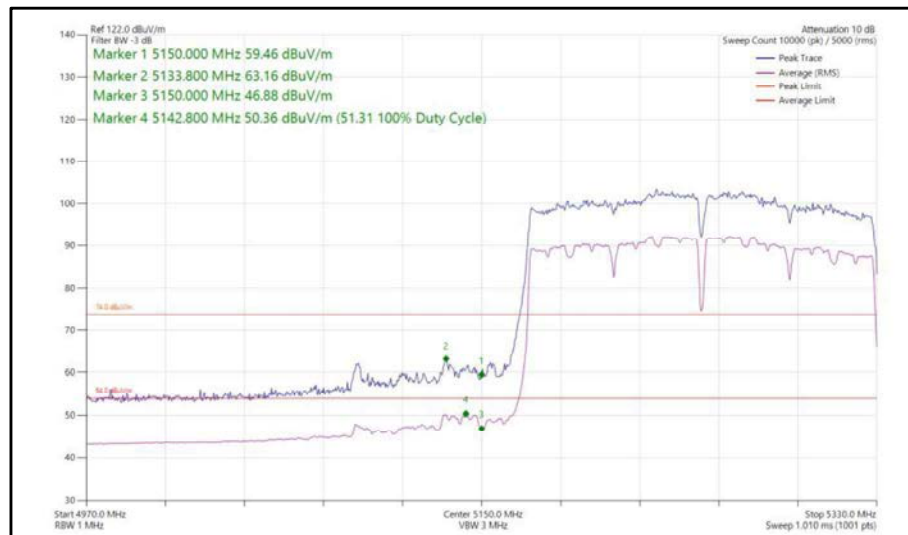


**Figure 150 - 802.11ac, VHT160, CDD, Core 0-1 - 5250 MHz,
Band Edge Frequency 5150 MHz**

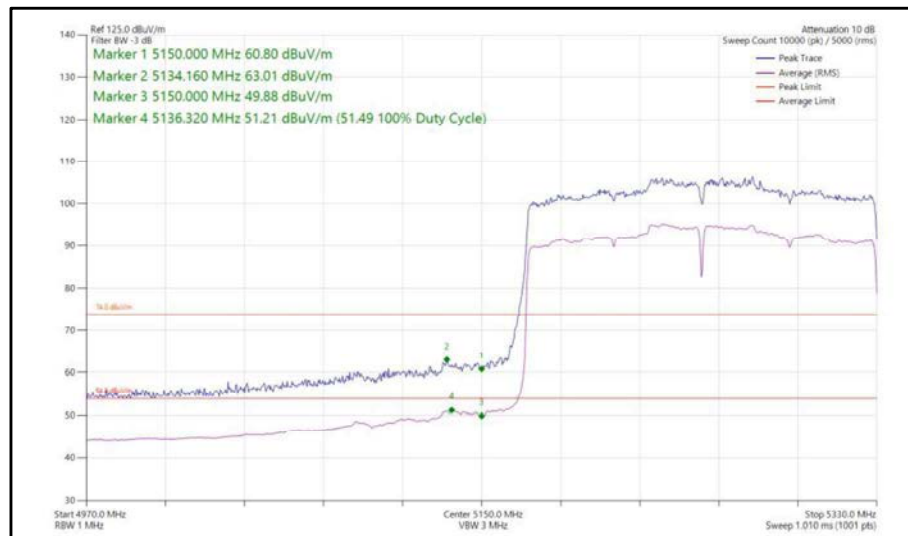


**Figure 151 - 802.11ax, HE160, SU, CDD, Core 0-1 - 5250 MHz,
Band Edge Frequency 5150 MHz**

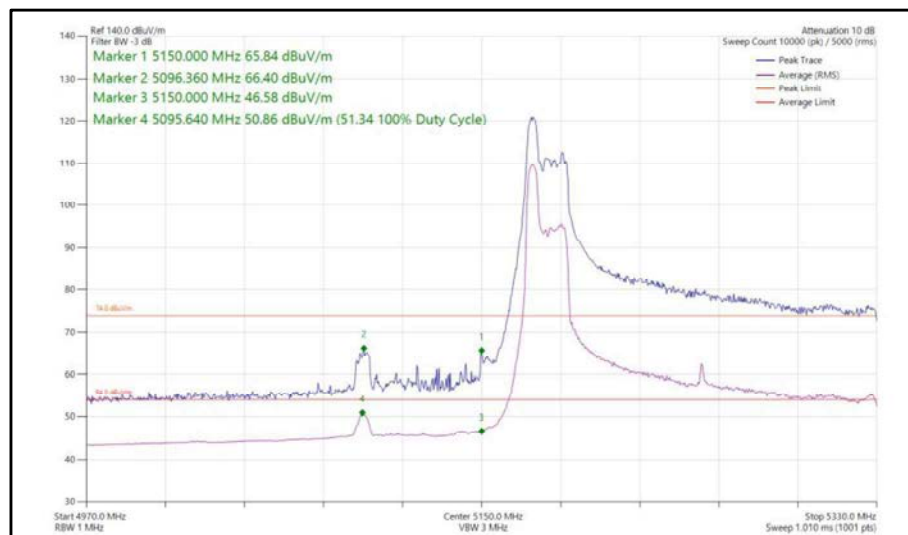

**Figure 152 - 802.11ax, HE160, RU 52-37, CDD, Core 0-1 - 5250 MHz,
Band Edge Frequency 5150 MHz**

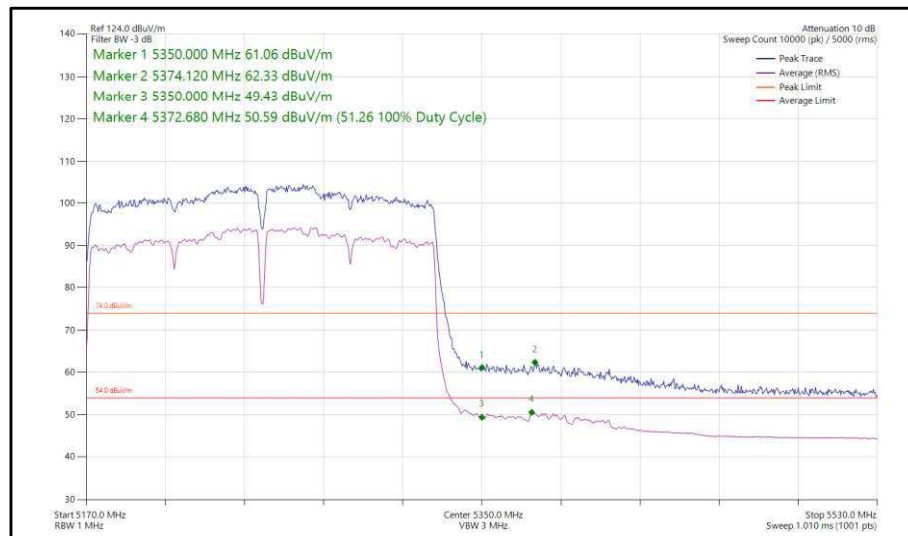

**Figure 153 - 802.11ac, VHT160, CDD, Core 0-1 - 5250 MHz,
Band Edge Frequency 5350 MHz**

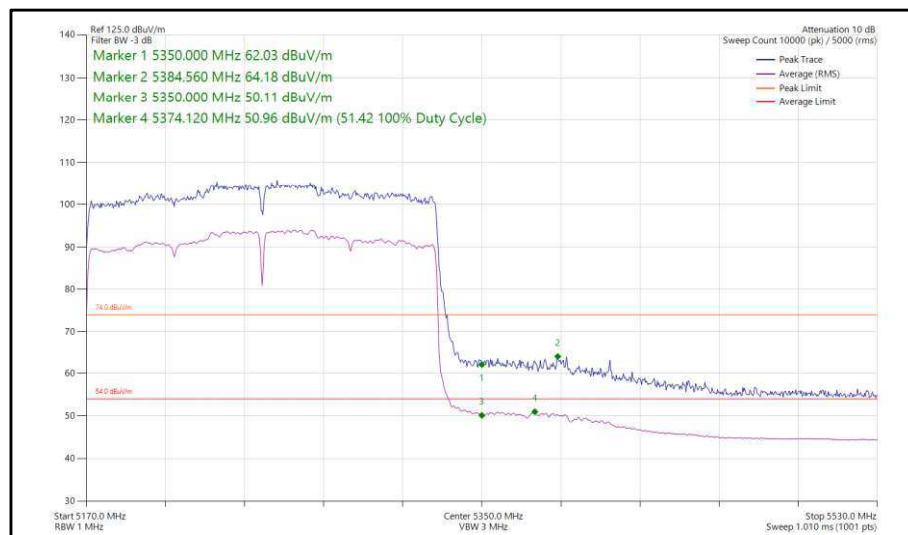

**Figure 154 - 802.11ax, HE160, SU, CDD, Core 0-1 - 5250 MHz,
Band Edge Frequency 5350 MHz**

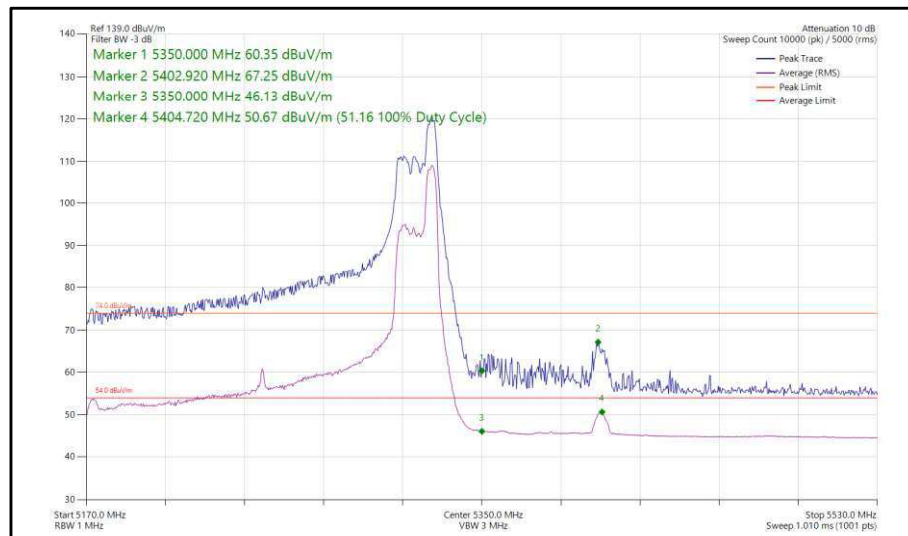


Figure 155 - 802.11ax, HE160, RU 52-52, CDD, Core 0-1 - 5250 MHz, Band Edge Frequency 5350 MHz



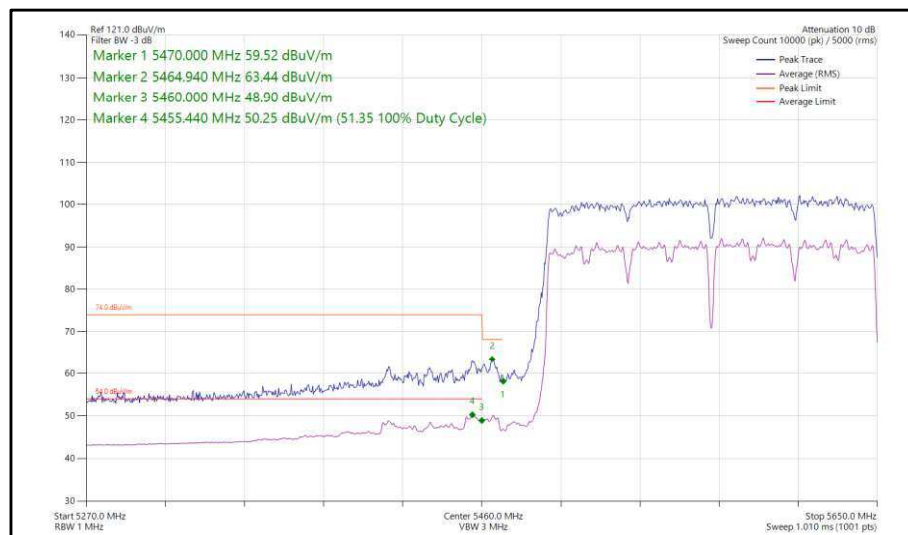


Figure 156 - 802.11ac, VHT160, CDD, Core 0-1 - 5570 MHz, Band Edge Frequency 5460 MHz

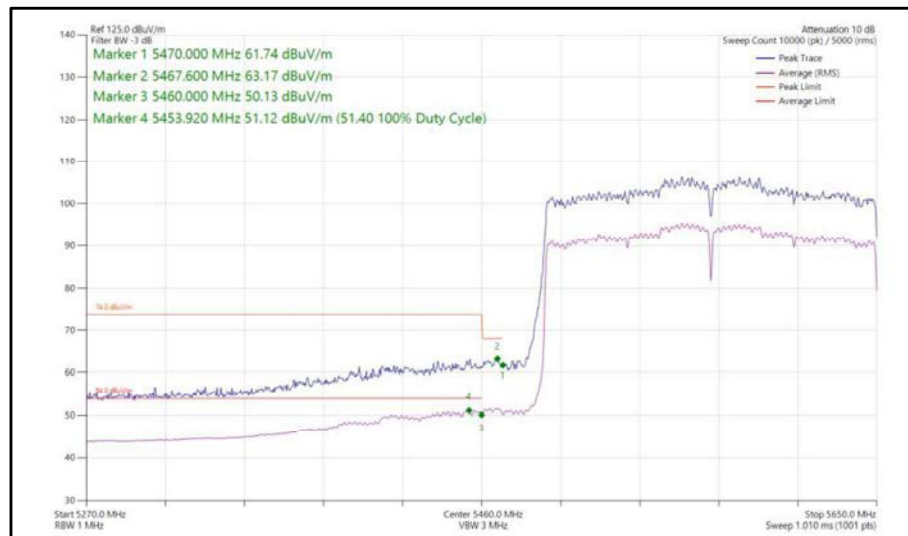

**Figure 157 - 802.11ax, HE160, SU, CDD, Core 0-1 - 5570 MHz,
Band Edge Frequency 5460 MHz**

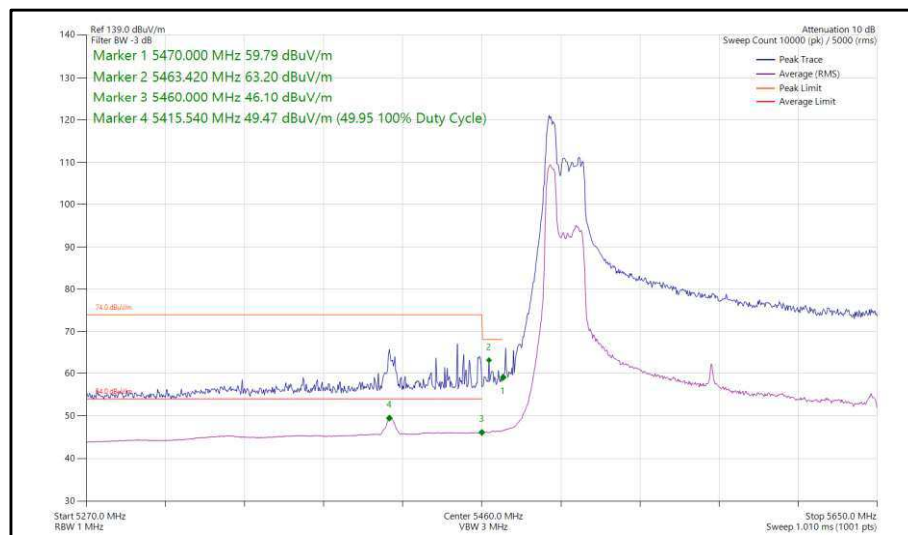

**Figure 158 - 802.11ax, HE160, RU 52-37, CDD, Core 0-1 - 5570 MHz,
Band Edge Frequency 5460 MHz**



160 MHz Bandwidth - Core 0-1 (SDM)

Mode	Data Rate/ MCS	Resource Size	Resource Index	TX Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dBμV/m)	Average Level (dBμV/m)
802.11ac VHT160	MCS7x2	-	-	5250	5150	64.10	51.27
802.11ax HE160	MCS11x2	SU	-	5250	5150	63.13	51.20
802.11ax HE160	MCS11x2	52	37	5250	5150	66.79	50.98
802.11ac VHT160	MCS4x2	-	-	5250	5350	63.07	51.49
802.11ax HE160	MCS2x2	SU	-	5250	5350	63.18	51.42
802.11ax HE160	MCS11x2	106	60	5250	5350	69.46	49.09
802.11ac VHT160	MCS2x2	-	-	5570	5460	60.68	51.45
802.11ax HE160	MCS2x2	SU	-	5570	5460	63.15	51.41
802.11ax HE160	MCS11x2	106	53	5570	5460	63.50	48.51

Table 24 - SDM Restricted Band Edge Results

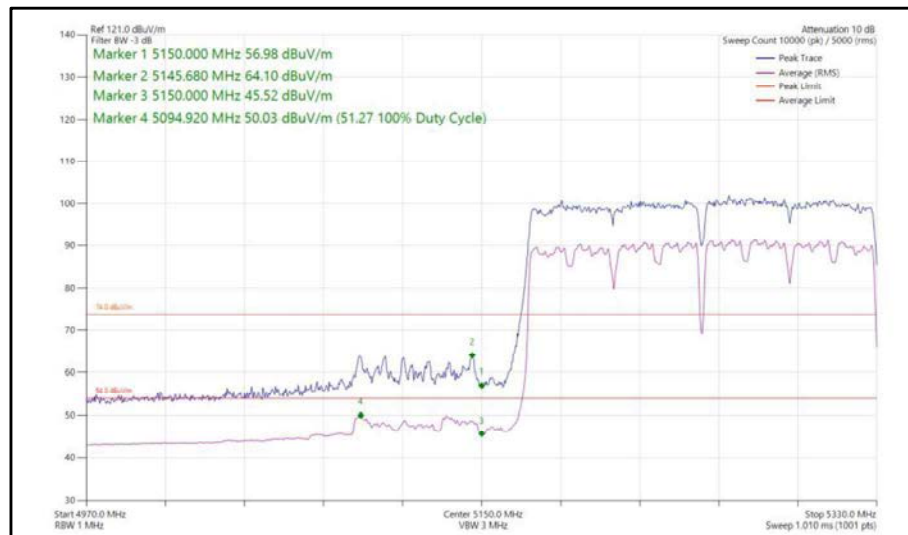


Figure 159 - 802.11ac, VHT160, SDM, Core 0-1 - 5250 MHz,
Band Edge Frequency 5150 MHz

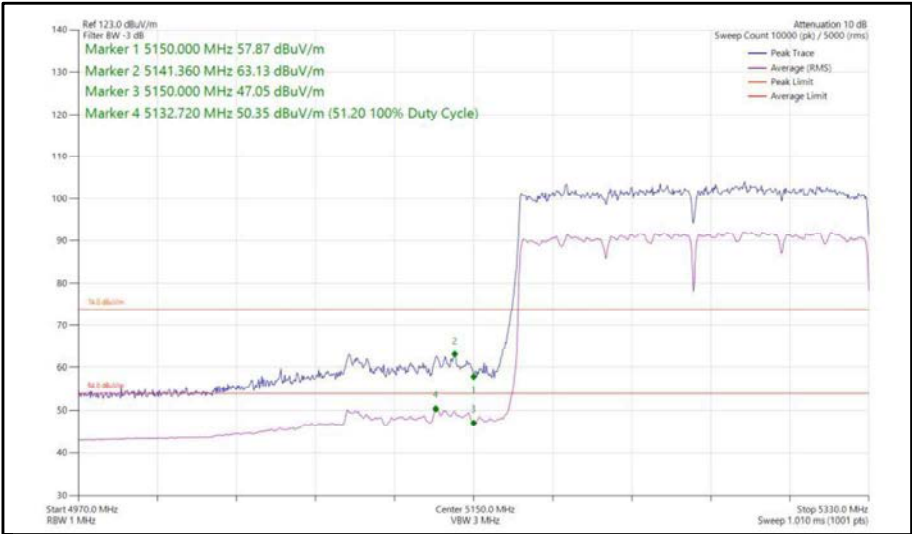


Figure 160 - 802.11ax, HE160, SU, SDM, Core 0-1 - 5250 MHz,
Band Edge Frequency 5150 MHz



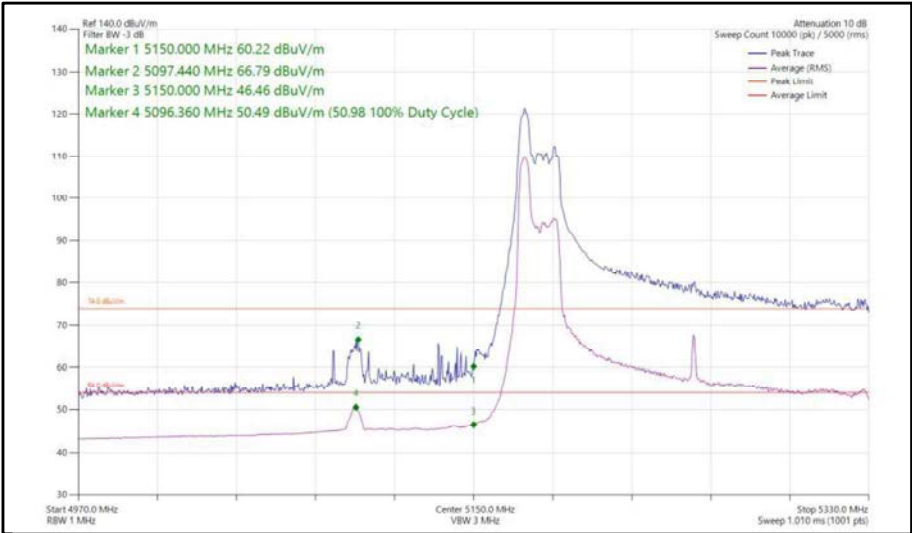


Figure 161 - 802.11ax, HE160, RU 52-37, SDM, Core 0-1 - 5250 MHz,
Band Edge Frequency 5150 MHz

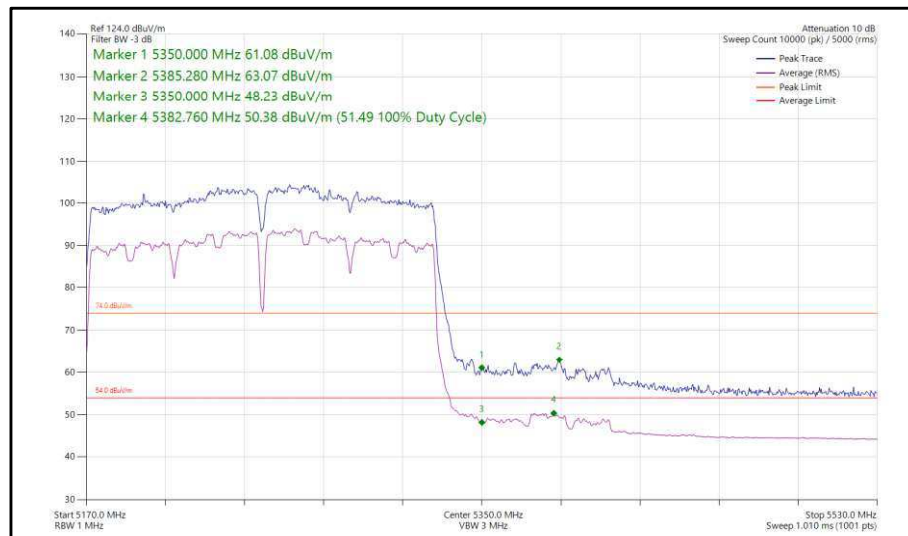

**Figure 162 - 802.11ac, VHT160, SDM, Core 0-1 - 5250 MHz,
Band Edge Frequency 5350 MHz**

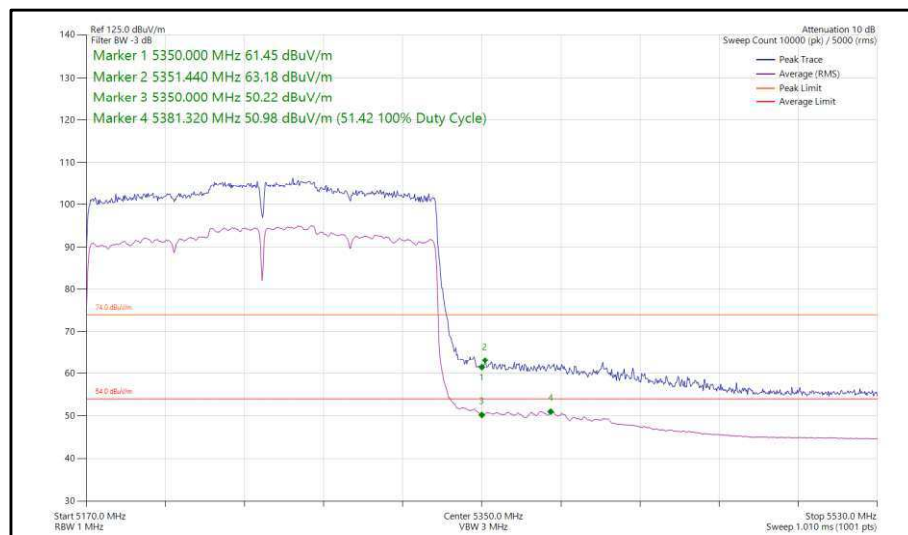

**Figure 163 - 802.11ax, HE160, SU, SDM, Core 0-1 - 5250 MHz,
Band Edge Frequency 5350 MHz**

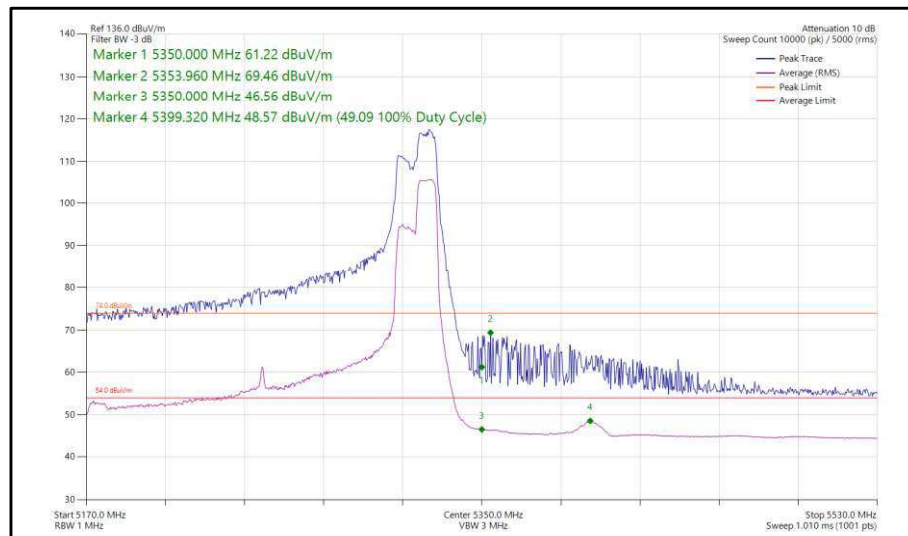


Figure 164 - 802.11ax, HE160, RU 106-60, SDM, Core 0-1 - 5250 MHz, Band Edge Frequency 5350 MHz



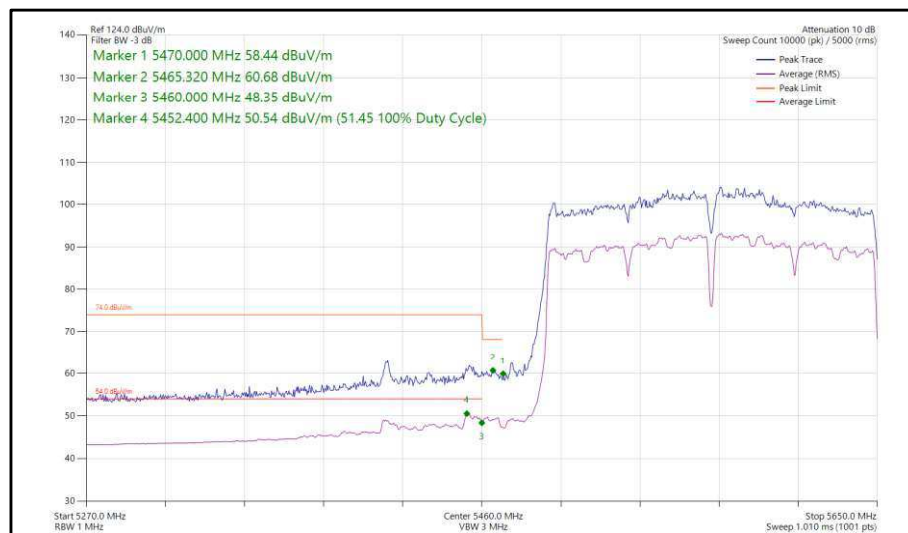


Figure 165 - 802.11ac, VHT160, SDM, Core 0-1 - 5570 MHz, Band Edge Frequency 5460 MHz

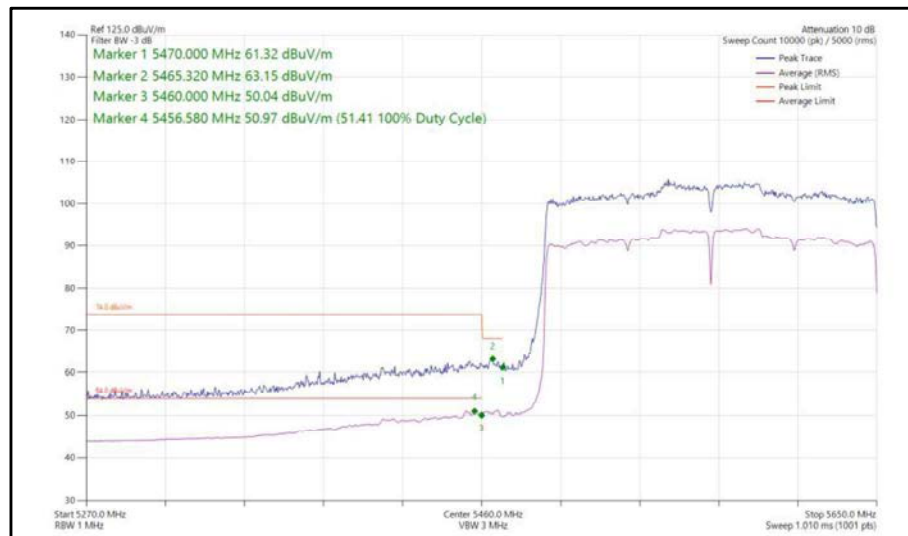

**Figure 166 - 802.11ax, HE160, SU, SDM, Core 0-1 - 5570 MHz,
Band Edge Frequency 5460 MHz**

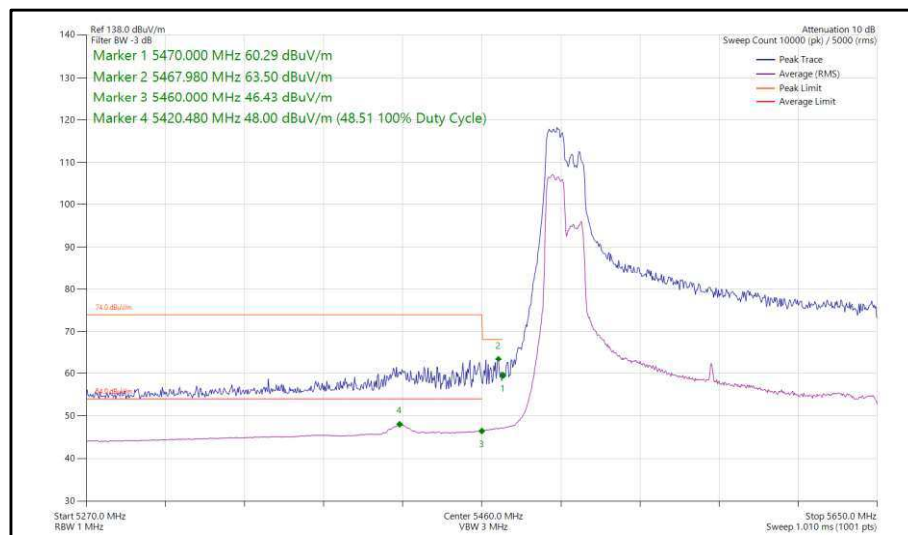

**Figure 167 - 802.11ax, HE160, RU 106-53, SDM, Core 0-1 - 5570 MHz,
Band Edge Frequency 5460 MHz**

FCC 47 CFR Part 15, Limit Clause 15.205 and ISSED RSS-GEN Limit Clause 8.10

	Peak (dBμV/m)	Average (dBμV/m)
Restricted Bands of Operation	74	54

Table 25 - Restricted Band Edge Limit Table



2.1.7 Test Location and Test Equipment Used

This test was carried out in RF Chamber 15.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
Emissions Software	TUV SUD	EmX V3.1.10	5125	-	Software
EMI Test Receiver	Rohde & Schwarz	ESW44	5911	12	24-Mar-2023
1500W (300V 12A) AC Power Supply	iTech	IT7324	5956	-	O/P Mon
5m Semi-Anechoic Chamber (Dual-Axis)	Albatross Projects	RF Chamber 15	5963	36	28-Apr-2025
Mast & Turntable Controller	Maturo Gmbh	FCU3.0	5966	-	TU
Tilt Antenna Mast	Maturo Gmbh	BAM4.5-P	5967	-	TU
Turntable	Maturo Gmbh	TT1.5SI	5968	-	TU
Cable (SMA to SMA 1m)	Junkosha	MWX221-01000AMSAMS/A	5996	12	06-Jun-2023
Cable (SMA to SMA 1m)	Junkosha	MWX221-01000AMSAMS/A	6007	12	06-Jun-2023
Cable (SMA to SMA 6.5m)	Junkosha	MWX221-06500AMSAMS/B	6014	12	07-Jun-2023
Horn Antenna (1-10 GHz)	Schwarzbeck	BBHA9120B	6140	12	21-Jun-2023
SAC Switch Unit	TUV SUD	TUV_SSU_001	6191	12	12-Dec-2023

Table 26

TU - Traceability Unscheduled

O/P Mon – Output Monitored using calibrated equipment



2.2 Emission Bandwidth

2.2.1 Specification Reference

FCC 47 CFR Part 15E, Clause 15.407 (a)
ISED RSS-247, Clause 6.2

2.2.2 Equipment Under Test and Modification State

A2873, S/N: XC39V4G1XF - Modification State 0
A2873, S/N: TXK29QXNGH - Modification State 0

2.2.3 Date of Test

20-March-2023 to 23-March-2023

2.2.4 Test Method

The test was performed in accordance with ANSI C63.10, clause 12.5.1 and 12.5.2 and ISED RSS-GEN, clause 4.6.1 and 4.6.2.

For modes of operation using multiple cores, measurements were made on each core but only the worst-case results are reported. Worst case was considered as the narrowest results for 6 dB bandwidth and the widest result for 26 dB bandwidth and 99% occupied bandwidth.

2.2.5 Environmental Conditions

Ambient Temperature	23.2 - 23.8 °C
Relative Humidity	34.2 - 38.3 %

2.2.6 Test Results

5 GHz WLAN

SISO

Protocol	26 dB Bandwidth (MHz)	
	Minimum	Maximum
802.11a	20.700	21.480
802.11n HT20	20.880	22.740
802.11n HT40	41.400	43.440
802.11ac VHT80	84.480	87.340
802.11ac VHT160	166.320	166.320
802.11ax HE20 SU	20.940	24.600
802.11ax HE40 SU	41.520	44.880
802.11ax HE80 SU	82.940	84.920
802.11ax HE160 SU	165.900	165.900

Table 27 - 26 dB Bandwidth Summary Results - SISO

Protocol	6 dB Bandwidth (MHz)	
	Minimum	Maximum
802.11a	16.140	16.200
802.11n HT20	17.340	17.700
802.11n HT40	35.520	36.120
802.11ac VHT80	75.900	75.900
802.11ax HE20 SU	18.900	19.020
802.11ax HE40 SU	38.160	38.160
802.11ax HE80 SU	77.000	77.000

Table 28 - 6 dB Bandwidth Summary Results - SISO



Figure 168 - 802.11a Minimum 6 dB EBW



Figure 169 - 802.11a Maximum 6 dB EBW



Figure 170 - 802.11n HT20 Minimum 6 dB EBW



Figure 171 - 802.11n HT20 Maximum 6 dB EBW



Figure 172 - 802.11n HT40 Minimum 6 dB EBW



Figure 173 - 802.11n HT40 Maximum 6 dB EBW



Figure 174 - 802.11ac VHT80 Minimum 6 dB EBW



Figure 175 - 802.11ac VHT80 Maximum 6 dB EBW



Figure 176 - 802.11ax HE20 SU
Minimum 6 dB EBW



Figure 177 - 802.11ax HE20 SU
Maximum 6 dB EBW



Figure 178 - 802.11ax HE40 SU
Minimum 6 dB EBW



Figure 179 - 802.11ax HE40 SU
Maximum 6 dB EBW



Figure 180 - 802.11ax HE80 SU
Minimum 6 dB EBW



Figure 181 - 802.11ax HE80 SU
Maximum 6 dB EBW



Protocol	99% Bandwidth (MHz)	
	Minimum	Maximum
802.11a	16.560	16.680
802.11n HT20	17.700	17.880
802.11n HT40	36.360	36.600
802.11ac VHT80	75.680	75.900
802.11ac VHT160	154.560	154.560
802.11ax HE20 SU	18.900	19.020
802.11ax HE40 SU	37.800	37.920
802.11ax HE80 SU	77.000	77.220
802.11ax HE160 SU	155.400	155.400

Table 29 - 99% Bandwidth Summary Results - SISO



Figure 182 - 802.11a Minimum 99% OBW



Figure 183 - 802.11a Maximum 99% OBW



Figure 184 - 802.11n HT20 Minimum 99% OBW



Figure 185 - 802.11n HT20 Maximum 99% OBW



Figure 186 - 802.11n HT40 Minimum 99% OBW



Figure 187 - 802.11n HT40 Maximum 99% OBW



Figure 188 - 802.11ac VHT80 Minimum 99% OBW



Figure 189 - 802.11ac VHT80 Maximum 99% OBW



Figure 190 - 802.11ac VHT160 Minimum 99% OBW



Figure 191 - 802.11ac VHT160 Maximum 99% OBW



Figure 192 - 802.11ax HE20 SU
Minimum 99% OBW



Figure 193 - 802.11ax HE20 SU
Maximum 99% OBW



Figure 194 - 802.11ax HE40 SU
Minimum 99% OBW



Figure 195 - 802.11ax HE40 SU
Maximum 99% OBW



Figure 196 - 802.11ax HE80 SU
Minimum 99% OBW



Figure 197 - 802.11ax HE80 SU
Maximum 99% OBW



Figure 198 - 802.11ax HE160 SU
Minimum 99% OBW



Figure 199 - 802.11ax HE160 SU
Maximum 99% OBW



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5180	-	21.480	-	-	-
5220	-	20.820	-	-	-
5240	-	20.820	-	-	-

Table 30 - 26 dB Bandwidth Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5180	-	21.900	-	-	-
5220	-	21.060	-	-	-
5240	-	21.000	-	-	-

Table 31 - 26 dB Bandwidth Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5190	-	43.320	-	-	-
5230	-	42.120	-	-	-

Table 32 - 26 dB Bandwidth Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5210	-	84.480	-	-	-

Table 33 - 26 dB Bandwidth Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ac VHT160	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5250	-	82.740	-	-	-

Table 34 - 26 dB Bandwidth Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5180	-	21.720	-	-	-
5220	-	21.060	-	-	-
5240	-	21.000	-	-	-

Table 35 - 26 dB Bandwidth Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5190	-	42.240	-	-	-
5230	-	41.760	-	-	-

Table 36 - 26 dB Bandwidth Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5210	-	84.920	-	-	-

Table 37 - 26 dB Bandwidth Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5250	-	83.160	-	-	-

Table 38 - 26 dB Bandwidth Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5180	-	16.620	-	-	-
5220	-	16.560	-	-	-
5240	-	16.620	-	-	-

Table 39 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5180	-	17.820	-	-	-
5220	-	17.700	-	-	-
5240	-	17.700	-	-	-

Table 40 - 99% Bandwidth Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5190	-	36.480	-	-	-
5230	-	36.360	-	-	-

Table 41 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5210	-	75.900	-	-	-

Table 42 - 99% Bandwidth Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ac VHT160	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5250	-	76.860	-	-	-

Table 43 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5180	-	18.960	-	-	-
5220	-	18.900	-	-	-
5240	-	18.960	-	-	-

Table 44 - 99% Bandwidth Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5190	-	37.920	-	-	-
5230	-	37.920	-	-	-

Table 45 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5210	-	77.220	-	-	-

Table 46 - 99% Bandwidth Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5250	-	77.700	-	-	-

Table 47 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5260	-	20.700	-	-	-
5300	-	20.700	-	-	-
5320	-	21.300	-	-	-

Table 48 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5260	-	16.560	-	-	-
5300	-	16.560	-	-	-
5320	-	16.620	-	-	-

Table 49 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5260	-	21.120	-	-	-
5300	-	21.060	-	-	-
5320	-	21.960	-	-	-

Table 50 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5260	-	17.700	-	-	-
5300	-	17.700	-	-	-
5320	-	17.820	-	-	-

Table 51 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5270	-	41.760	-	-	-
5310	-	42.720	-	-	-

Table 52 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5270	-	36.480	-	-	-
5310	-	36.480	-	-	-

Table 53 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5290	-	86.460	-	-	-

Table 54 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5290	-	75.900	-	-	-

Table 55 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ac VHT160	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5250	-	83.580	-	-	-

Table 56 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5250	-	77.280	-	-	-

Table 57 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5260	-	21.060	-	-	-
5300	-	21.000	-	-	-
5320	-	21.840	-	-	-

Table 58 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5260	-	18.960	-	-	-
5300	-	18.900	-	-	-
5320	-	19.020	-	-	-

Table 59 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5270	-	41.640	-	-	-
5310	-	43.920	-	-	-

Table 60 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5270	-	37.920	-	-	-
5310	-	37.920	-	-	-

Table 61 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5290	-	83.820	-	-	-

Table 62 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5290	-	77.000	-	-	-

Table 63 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5250	-	82.740	-	-	-

Table 64 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5250	-	77.700	-	-	-

Table 65 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5500	-	21.420	-	-	-
5600	-	20.820	-	-	-
5700	-	21.420	-	-	-
5720	-	15.380	-	-	-

Table 66 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5500	-	16.620	-	-	-
5600	-	16.560	-	-	-
5700	-	16.680	-	-	-
5720	-	13.160	-	-	-

Table 67 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5500	-	22.740	-	-	-
5600	-	20.940	-	-	-
5700	-	22.200	-	-	-
5720	-	15.500	-	-	-

Table 68 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5500	-	17.820	-	-	-
5600	-	17.700	-	-	-
5700	-	17.820	-	-	-
5720	-	13.760	-	-	-

Table 69 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5510	-	42.840	-	-	-
5590	-	41.640	-	-	-
5670	-	43.440	-	-	-
5710	-	35.760	-	-	-

Table 70 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5510	-	36.600	-	-	-
5590	-	36.360	-	-	-
5670	-	36.600	-	-	-
5710	-	32.880	-	-	-

Table 71 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5530	-	86.460	-	-	-
5610	-	87.340	-	-	-
5690	-	75.920	-	-	-

Table 72 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5530	-	75.680	-	-	-
5610	-	75.900	-	-	-
5690	-	72.180	-	-	-

Table 73 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ac VHT160	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5570	-	166.320	-	-	-

Table 74 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5570	-	154.560	-	-	-

Table 75 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5500	-	24.600	-	-	-
5600	-	21.120	-	-	-
5700	-	21.840	-	-	-
5720	-	15.440	-	-	-

Table 76 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5500	-	19.020	-	-	-
5600	-	18.900	-	-	-
5700	-	18.960	-	-	-
5720	-	14.360	-	-	-

Table 77 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5510	-	44.880	-	-	-
5590	-	41.520	-	-	-
5670	-	43.080	-	-	-
5710	-	35.760	-	-	-

Table 78 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5510	-	37.920	-	-	-
5590	-	37.800	-	-	-
5670	-	37.920	-	-	-
5710	-	33.600	-	-	-

Table 79 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5530	-	82.940	-	-	-
5610	-	83.820	-	-	-
5690	-	76.140	-	-	-

Table 80 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5530	-	77.000	-	-	-
5610	-	77.000	-	-	-
5690	-	72.840	-	-	-

Table 81 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5570	-	165.900	-	-	-

Table 82 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5570	-	155.400	-	-	-

Table 83 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407(e) RSS-247 6.2.4.1	Test Method(s):	C63.10 6.9.3 789033 D02 v02r01 II.C.2.
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11a	Duty Cycle (%):	-
Data Rate:	12 Mbps	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5720	-	3.220	-	-	≥500.0
5745	-	16.140	-	-	≥500.0
5785	-	16.200	-	-	≥500.0
5825	-	16.200	-	-	≥500.0

Table 84 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5720	-	4.000	-	-	-
5745	-	16.560	-	-	-
5785	-	16.560	-	-	-
5825	-	16.560	-	-	-

Table 85 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407(e) RSS-247 6.2.4.1	Test Method(s):	C63.10 6.9.3 789033 D02 v02r01 II.C.2.
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5720	-	3.820	-	-	≥500.0
5745	-	17.340	-	-	≥500.0
5785	-	17.460	-	-	≥500.0
5825	-	17.700	-	-	≥500.0

Table 86 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5720	-	4.180	-	-	-
5745	-	17.760	-	-	-
5785	-	17.700	-	-	-
5825	-	17.760	-	-	-

Table 87 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407(e) RSS-247 6.2.4.1	Test Method(s):	C63.10 6.9.3 789033 D02 v02r01 II.C.2.
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5710	-	3.240	-	-	≥500.0
5755	-	36.120	-	-	≥500.0
5795	-	35.520	-	-	≥500.0

Table 88 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5710	-	5.400	-	-	-
5755	-	36.360	-	-	-
5795	-	36.480	-	-	-

Table 89 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407(e) RSS-247 6.2.4.1	Test Method(s):	C63.10 6.9.3 789033 D02 v02r01 II.C.2.
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5690	-	3.060	-	-	≥500.0
5775	-	75.900	-	-	≥500.0

Table 90 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5690	-	26.820	-	-	-
5775	-	75.680	-	-	-

Table 91 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407(e) RSS-247 6.2.4.1	Test Method(s):	C63.10 6.9.3 789033 D02 v02r01 II.C.2.
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5720	-	4.540	-	-	≥500.0
5745	-	18.960	-	-	≥500.0
5785	-	19.020	-	-	≥500.0
5825	-	18.900	-	-	≥500.0

Table 92 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5720	-	4.600	-	-	-
5745	-	18.960	-	-	-
5785	-	18.960	-	-	-
5825	-	18.960	-	-	-

Table 93 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407(e) RSS-247 6.2.4.1	Test Method(s):	C63.10 6.9.3 789033 D02 v02r01 II.C.2.
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5710	-	4.080	-	-	≥500.0
5755	-	38.160	-	-	≥500.0
5795	-	38.160	-	-	≥500.0

Table 94 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5710	-	4.800	-	-	-
5755	-	37.920	-	-	-
5795	-	37.920	-	-	-

Table 95 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407(e) RSS-247 6.2.4.1	Test Method(s):	C63.10 6.9.3 789033 D02 v02r01 II.C.2.
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5690	-	3.940	-	-	≥500.0
5775	-	77.000	-	-	≥500.0

Table 96 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5690	-	20.000	-	-	-
5775	-	76.780	-	-	-

Table 97 - 99% Bandwidth Results



MIMO CDD

Protocol	26 dB Bandwidth (MHz)	
	Minimum	Maximum
802.11n HT20	20.940	22.620
802.11n HT40	41.280	46.080
802.11ac VHT80	84.260	91.080
802.11ac VHT160	165.900	165.900
802.11ax HE20 SU	20.940	26.100
802.11ax HE40 SU	41.520	45.000
802.11ax HE80 SU	82.720	85.800
802.11ax HE160 SU	165.480	166.320

Table 98 - 26 dB Bandwidth Summary Results - MIMO CDD

Protocol	6 dB Bandwidth (MHz)	
	Minimum	Maximum
802.11n HT20	16.680	17.640
802.11n HT40	35.400	35.880
802.11ac VHT80	75.680	75.680
802.11ax HE20 SU	18.600	19.020
802.11ax HE40 SU	37.560	38.040
802.11ax HE80 SU	75.900	77.220

Table 99 - 6 dB Bandwidth Summary Results - MIMO CDD



Figure 200 - 802.11n HT20 Minimum 6 dB EBW



Figure 201 - 802.11n HT20 Maximum 6 dB EBW



Figure 202 - 802.11n HT40 Minimum 6 dB EBW



Figure 203 - 802.11n HT40 Maximum 6 dB EBW



Figure 204 - 802.11ac VHT80 Minimum 6 dB EBW



Figure 205 - 802.11ac VHT80 Maximum 6 dB EBW



Figure 206 - 802.11ax HE20 SU Minimum 6 dB EBW



Figure 207 - 802.11ax HE20 SU Maximum 6 dB EBW



Figure 208 - 802.11ax HE40 SU
Minimum 6 dB EBW



Figure 209 - 802.11ax HE40 SU
Maximum 6 dB EBW



Figure 210 - 802.11ax HE80 SU
Minimum 6 dB EBW



Figure 211 - 802.11ax HE80 SU
Maximum 6 dB EBW



Protocol	99% Bandwidth (MHz)	
	Minimum	Maximum
802.11n HT20	17.700	17.820
802.11n HT40	36.240	36.720
802.11ac VHT80	75.680	75.900
802.11ac VHT160	154.560	154.560
802.11ax HE20 SU	18.900	19.020
802.11ax HE40 SU	37.680	38.040
802.11ax HE80 SU	77.000	77.220
802.11ax HE160 SU	155.820	155.820

Table 100 - 99% Bandwidth Summary Results - MIMO CDD



Figure 212 - 802.11n HT20 Minimum 99% OBW



Figure 213 - 802.11n HT20 Maximum 99% OBW



Figure 214 - 802.11n HT40 Minimum 99% OBW



Figure 215 - 802.11n HT40 Maximum 99% OBW



Figure 216 - 802.11ac VHT80 Minimum 99% OBW



Figure 217 - 802.11ac VHT80 Maximum 99% OBW



Figure 218 - 802.11ac VHT160 Minimum 99% OBW



Figure 219 - 802.11ac VHT160 Maximum 99% OBW



Figure 220 - 802.11ax HE20 SU Minimum 99% OBW



Figure 221 - 802.11ax HE20 SU Maximum 99% OBW



Figure 222 - 802.11ax HE40 SU
Minimum 99% OBW

Figure 223 - 802.11ax HE40 SU
Maximum 99% OBW



Figure 224 - 802.11ax HE80 SU
Minimum 99% OBW

Figure 225 - 802.11ax HE80 SU
Maximum 99% OBW



Figure 226 - 802.11ax HE160 SU
Minimum 99% OBW

Figure 227 - 802.11ax HE160 SU
Maximum 99% OBW



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5180	21.660	22.140	-	-	-
5220	21.000	21.120	-	-	-
5240	21.120	21.060	-	-	-

Table 101 - 26 dB Bandwidth Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5190	42.840	43.200	-	-	-
5230	41.520	41.400	-	-	-

Table 102 - 26 dB Bandwidth Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5210	87.120	86.900	-	-	-

Table 103 - 26 dB Bandwidth Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ac VHT160	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5250	82.740	82.740	-	-	-

Table 104 - 26 dB Bandwidth Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5180	21.900	21.780	-	-	-
5220	20.940	21.120	-	-	-
5240	21.120	21.060	-	-	-

Table 105 - 26 dB Bandwidth Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5190	42.960	43.080	-	-	-
5230	41.520	41.520	-	-	-

Table 106 - 26 dB Bandwidth Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5210	84.040	84.920	-	-	-

Table 107 - 26 dB Bandwidth Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5250	82.740	82.320	-	-	-

Table 108 - 26 dB Bandwidth Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5180	17.820	17.820	-	-	-
5220	17.700	17.700	-	-	-
5240	17.700	17.760	-	-	-

Table 109 - 99% Bandwidth Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5190	36.600	36.480	-	-	-
5230	36.360	36.360	-	-	-

Table 110 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5210	75.900	75.900	-	-	-

Table 111 - 99% Bandwidth Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ac VHT160	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5250	76.860	76.860	-	-	-

Table 112 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5180	19.020	18.960	-	-	-
5220	18.900	18.960	-	-	-
5240	18.900	18.900	-	-	-

Table 113 - 99% Bandwidth Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5190	37.920	37.920	-	-	-
5230	37.680	37.800	-	-	-

Table 114 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5210	77.220	77.000	-	-	-

Table 115 - 99% Bandwidth Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5250	77.700	77.700	-	-	-

Table 116 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5260	21.000	20.940	-	-	-
5300	21.000	21.060	-	-	-
5320	21.900	21.900	-	-	-

Table 117 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5260	17.700	17.700	-	-	-
5300	17.700	17.700	-	-	-
5320	17.820	17.820	-	-	-

Table 118 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5270	41.300	41.400	-	-	-
5310	42.840	46.080	-	-	-

Table 119 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5270	36.400	36.240	-	-	-
5310	36.600	36.600	-	-	-

Table 120 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5290	86.900	84.260	-	-	-

Table 121 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5290	75.680	75.680	-	-	-

Table 122 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ac VHT160	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5250	83.580	82.740	-	-	-

Table 123 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5250	77.280	77.280	-	-	-

Table 124 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5260	21.180	21.060	-	-	-
5300	21.060	21.060	-	-	-
5320	24.540	21.720	-	-	-

Table 125 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5260	18.900	18.900	-	-	-
5300	18.900	18.900	-	-	-
5320	19.020	19.020	-	-	-

Table 126 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5270	41.640	41.520	-	-	-
5310	43.920	43.200	-	-	-

Table 127 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5270	37.800	37.800	-	-	-
5310	37.920	37.920	-	-	-

Table 128 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5290	84.040	84.920	-	-	-

Table 129 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5290	77.000	77.000	-	-	-

Table 130 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5250	82.740	82.740	-	-	-

Table 131 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5250	77.700	77.700	-	-	-

Table 132 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5500	22.200	21.840	-	-	-
5600	21.060	21.060	-	-	-
5700	21.960	21.840	-	-	-
5720	15.500	15.560	-	-	-

Table 133 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5500	17.820	17.820	-	-	-
5600	17.700	17.700	-	-	-
5700	17.820	17.820	-	-	-
5720	13.760	13.760	-	-	-

Table 134 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5510	42.840	45.960	-	-	-
5590	41.400	41.400	-	-	-
5670	45.240	42.840	-	-	-
5710	35.640	35.760	-	-	-

Table 135 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5510	36.480	36.600	-	-	-
5590	36.360	36.400	-	-	-
5670	36.600	36.720	-	-	-
5710	32.880	32.880	-	-	-

Table 136 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5530	86.460	84.920	-	-	-
5610	87.120	86.900	-	-	-
5690	75.920	75.920	-	-	-

Table 137 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5530	75.680	75.680	-	-	-
5610	75.900	75.900	-	-	-
5690	72.180	72.180	-	-	-

Table 138 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ac VHT160	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5570	165.900	165.900	-	-	-

Table 139 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5570	154.560	154.560	-	-	-

Table 140 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5500	21.720	26.100	-	-	-
5600	20.940	21.120	-	-	-
5700	24.180	22.020	-	-	-
5720	15.500	15.560	-	-	-

Table 141 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5500	18.960	19.020	-	-	-
5600	18.900	18.900	-	-	-
5700	19.020	18.960	-	-	-
5720	14.360	14.360	-	-	-

Table 142 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5510	43.320	45.000	-	-	-
5590	41.520	41.520	-	-	-
5670	43.440	43.560	-	-	-
5710	35.760	35.640	-	-	-

Table 143 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5510	37.920	37.920	-	-	-
5590	37.800	37.800	-	-	-
5670	38.040	37.920	-	-	-
5710	33.600	33.600	-	-	-

Table 144 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5530	83.820	85.800	-	-	-
5610	84.260	82.720	-	-	-
5690	76.140	75.920	-	-	-

Table 145 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5530	77.000	77.000	-	-	-
5610	77.000	77.000	-	-	-
5690	72.840	72.840	-	-	-

Table 146 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	-	Test Method(s):	C63.10 6.9.3 C63.10 12.5.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE160 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	26 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5570	166.320	165.480	-	-	-

Table 147 - 26 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5570	155.820	155.820	-	-	-

Table 148 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407(e) RSS-247 6.2.4.1	Test Method(s):	C63.10 6.9.3 789033 D02 v02r01 II.C.2.
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5720	3.820	3.820	-	-	≥500.0
5745	17.340	16.680	-	-	≥500.0
5785	17.640	17.040	-	-	≥500.0
5825	16.980	17.280	-	-	≥500.0

Table 149 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5720	4.180	4.180	-	-	-
5745	17.700	17.700	-	-	-
5785	17.700	17.700	-	-	-
5825	17.700	17.760	-	-	-

Table 150 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407(e) RSS-247 6.2.4.1	Test Method(s):	C63.10 6.9.3 789033 D02 v02r01 II.C.2.
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5710	2.880	3.000	-	-	≥500.0
5755	35.880	35.400	-	-	≥500.0
5795	35.640	35.400	-	-	≥500.0

Table 151 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5710	4.560	4.560	-	-	-
5755	36.480	36.480	-	-	-
5795	36.360	36.480	-	-	-

Table 152 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407(e) RSS-247 6.2.4.1	Test Method(s):	C63.10 6.9.3 789033 D02 v02r01 II.C.2.
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5690	3.060	3.280	-	-	≥500.0
5775	75.680	75.680	-	-	≥500.0

Table 153 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5690	5.040	5.040	-	-	-
5775	75.460	75.460	-	-	-

Table 154 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407(e) RSS-247 6.2.4.1	Test Method(s):	C63.10 6.9.3 789033 D02 v02r01 II.C.2.
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5720	4.540	4.540	-	-	≥500.0
5745	18.960	18.660	-	-	≥500.0
5785	18.780	18.600	-	-	≥500.0
5825	19.020	19.020	-	-	≥500.0

Table 155 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5720	4.600	4.660	-	-	-
5745	18.960	18.960	-	-	-
5785	18.900	18.960	-	-	-
5825	18.900	18.960	-	-	-

Table 156 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407(e) RSS-247 6.2.4.1	Test Method(s):	C63.10 6.9.3 789033 D02 v02r01 II.C.2.
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5710	4.080	4.080	-	-	≥500.0
5755	37.920	37.560	-	-	≥500.0
5795	38.040	37.800	-	-	≥500.0

Table 157 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5710	4.560	4.560	-	-	-
5755	37.800	37.800	-	-	-
5795	37.800	37.920	-	-	-

Table 158 - 99% Bandwidth Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407(e) RSS-247 6.2.4.1	Test Method(s):	C63.10 6.9.3 789033 D02 v02r01 II.C.2.
Additional Reference(s):	-		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	-
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5690	4.160	3.940	-	-	≥500.0
5775	77.220	75.900	-	-	≥500.0

Table 159 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
5690	4.820	5.040	-	-	-
5775	76.780	76.780	-	-	-

Table 160 - 99% Bandwidth Results



MIMO SDM

Protocol	26 dB Bandwidth (MHz)	
	Minimum	Maximum
802.11n HT20	20.880	22.740
802.11n HT40	41.100	45.000
802.11ac VHT80	84.700	99.220
802.11ac VHT160	165.900	166.740
802.11ax HE20 SU	20.880	24.240
802.11ax HE40 SU	41.400	44.040
802.11ax HE80 SU	83.160	86.680
802.11ax HE160 SU	165.480	165.900

Table 161 - 26 dB Bandwidth Summary Results - MIMO SDM

Protocol	6 dB Bandwidth (MHz)	
	Minimum	Maximum
802.11n HT20	17.100	17.460
802.11n HT40	35.400	35.880
802.11ac VHT80	75.680	75.680
802.11ax HE20 SU	18.840	19.020
802.11ax HE40 SU	37.680	38.040
802.11ax HE80 SU	76.560	76.560

Table 162 - 6 dB Bandwidth Summary Results - MIMO SDM



Figure 228 - 802.11n HT20 Minimum 6 dB EBW



Figure 229 - 802.11n HT20 Maximum 6 dB EBW



Figure 230 - 802.11n HT40 Minimum 6 dB EBW



Figure 231 - 802.11n HT40 Maximum 6 dB EBW



Figure 232 - 802.11ac VHT80 Minimum 6 dB EBW



Figure 233 - 802.11ac VHT80 Maximum 6 dB EBW



Figure 234 - 802.11ax HE20 SU Minimum 6 dB EBW



Figure 235 - 802.11ax HE20 SU Maximum 6 dB EBW



Figure 236 - 802.11ax HE40 SU
Minimum 6 dB EBW

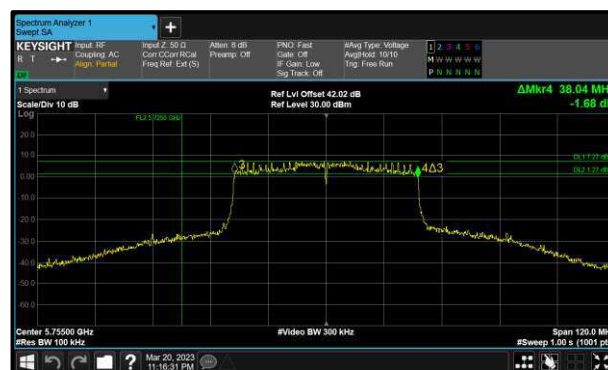


Figure 237 - 802.11ax HE40 SU
Maximum 6 dB EBW



Figure 238 - 802.11ax HE80 SU
Minimum 6 dB EBW



Figure 239 - 802.11ax HE80 SU
Maximum 6 dB EBW



Protocol	99% Bandwidth (MHz)	
	Minimum	Maximum
802.11n HT20	17.640	17.880
802.11n HT40	36.300	36.720
802.11ac VHT80	75.680	76.120
802.11ac VHT160	154.560	154.560
802.11ax HE20 SU	18.900	19.020
802.11ax HE40 SU	37.800	37.920
802.11ax HE80 SU	76.780	77.220
802.11ax HE160 SU	155.820	156.240

Table 163 - 99% Bandwidth Summary Results - MIMO SDM



Figure 240 - 802.11n HT20 Minimum 99% OBW



Figure 241 - 802.11n HT20 Maximum 99% OBW



Figure 242 - 802.11n HT40 Minimum 99% OBW



Figure 243 - 802.11n HT40 Maximum 99% OBW



Figure 244 - 802.11ac VHT80 Minimum 99% OBW



Figure 245 - 802.11ac VHT80 Maximum 99% OBW



Figure 246 - 802.11ac VHT160 Minimum 99% OBW



Figure 247 - 802.11ac VHT160 Maximum 99% OBW



Figure 248 - 802.11ax HE20 SU Minimum 99% OBW



Figure 249 - 802.11ax HE20 SU Maximum 99% OBW