

FCC and ISED Test Report

Apple Inc
Model: A2991

In accordance with FCC 47 CFR Part 15E, ISED
RSS-247 and ISED RSS-GEN
(5 GHz WLAN)

Prepared for: Apple Inc
One Apple Park Way
Cupertino
California
95014
USA



Add value.
Inspire trust.

TUV SUD
Digitally signed by
TUV SUD
Date: 2023.10.11
14:38:56 +01'00'

FCC ID: BCGA2991

IC: 579C-A2991

COMMERCIAL-IN-CONFIDENCE

Document 75957632-71 Issue 01

SIGNATURE

NAME	JOB TITLE	RESPONSIBLE FOR	ISSUE DATE
Phil Harrison	Chief Engineer	Authorised Signatory	11 October 2023

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD document control rules.

ENGINEERING STATEMENT

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC 47 CFR Part 15E, ISED RSS-247 and ISED RSS-GEN. The sample tested was found to comply with the requirements defined in the applied rules.

RESPONSIBLE FOR	NAME	DATE	SIGNATURE
Report Generation	Lauren Walters	11 October 2023	

FCC Accreditation

553713/UK2026 Concorde Park, Fareham Test Laboratory

ISED Accreditation

28798 Concorde Park, Fareham Test Laboratory

EXECUTIVE SUMMARY

A sample of this product was tested and found to be compliant with FCC 47 CFR Part 15E: 2021, ISED RSS-247: Issue 2 (2017-02) and ISED RSS-GEN: Issue 5 (2018-04) + A2 (2021-02) for the tests detailed in section 1.3.



DISCLAIMER AND COPYRIGHT

This non-binding report has been prepared by TÜV SÜD with all reasonable skill and care. The document is confidential to the potential Client and TÜV SÜD. No part of this document may be reproduced without the prior written approval of TÜV SÜD. © 2023 TÜV SÜD. This report relates only to the actual item/items tested.

ACCREDITATION

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation. Results of tests not covered by our UKAS Accreditation Schedule are marked NUA (Not UKAS Accredited). Results of tests covered by our Flexible UKAS Accreditation Schedule are marked FS (Flexible Scope).

TÜV SÜD
is a trading name of TÜV SÜD Ltd
Registered in Scotland at East Kilbride,
Glasgow G75 0QF, United Kingdom
Registered number: SC215164

TÜV SÜD Ltd is a
TÜV SÜD Group Company

Phone: +44 (0) 1489 558100
Fax: +44 (0) 1489 558101
www.tuvsud.com/en

TÜV SÜD
Octagon House
Concorde Way
Fareham
Hampshire PO15 5RL
United Kingdom

TÜV SÜD

TÜV®



Contents

1	Report Summary	2
1.1	Report Modification Record.....	2
1.2	Introduction.....	2
1.3	Brief Summary of Results	3
1.4	Product Information	4
1.5	Deviations from the Standard.....	5
1.6	EUT Modification Record	6
1.7	Test Location	7
2	Test Details	8
2.1	Restricted Band Edges.....	8
2.2	Emission Bandwidth	133
2.3	Maximum Conducted Output Power	264
2.4	Maximum Conducted Power Spectral Density	390
2.5	Authorised Band Edges	493
2.6	Spurious Radiated Emissions	652
2.7	Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period	690
3	Measurement Uncertainty	701



1 Report Summary

1.1 Report Modification Record

Alterations and additions to this report will be issued to the holders of each copy in the form of a complete document.

Issue	Description of Change	Date of Issue
1	First Issue	11-October-2023

Table 1

1.2 Introduction

Applicant	Apple Inc
Manufacturer	Apple Inc
Model Number(s)	A2991
Serial Number(s)	LRYJMC4D4, N7RTH0WPW3, XNJWHY732L, J042FJ2R12, Y7RPXWJ9N9 and LT4JJ1WVVR
Hardware Version(s)	REV 1.0
Software Version(s)	23A32390z, 23A32390z, 23A32390z, 23A32391n, 23A32391n and 23A300
Number of Samples Tested	6
Test Specification/Issue/Date	FCC 47 CFR Part 15E: 2021 ISED RSS-247: Issue 2 (2017-02) ISED RSS-GEN: Issue 5 (2018-04) + A2 (2021-02)
Start of Test	06-June-2023
Finish of Test	14-September-2023
Name of Engineer(s)	Akhil Rajendran Bhaskaran Nair, Colin Brain, Dale Hills, Elliot Callender, Ian Hart, Morsalin Hossain, Thomas Randall, Tony Baby, Feda Hussein, Jayvir Makwana, Mustafa Murad, Babitha Babu, Stefan Gilfedder, Tjiyandjeua Tjizumaue, James Woods, Vineeth Nagaraj, Ioan-Alexandru Bogatu, Michael Evans
Related Document(s)	ANSI C63.10 (2013) ANSI C63.10 (2020) KDB 662911 D01 v02r01 KDB 789033 D02 v02r01 KDB 905462 D02 v02 KDB 905462 D03 v01r02



1.3 Brief Summary of Results

A brief summary of the tests carried out in accordance with FCC 47 CFR Part 15E, ISSED RSS-247 and ISSED RSS-GEN is shown below.

Section	Specification Clause			Test Description	Result	Comments/Base Standard
	FCC Part 15E	RSS-247	RSS-GEN			
Configuration and Mode: 5 GHz WLAN						
-	15.203	-	-	Antenna Requirement	N/T	The device complies with the provisions of this section, as it uses permanently attached integral antennas.
2.1	15.205	3.3	8.10	Restricted Band Edges	Pass	
2.2	15.407 (a)	6.2	-	Emission Bandwidth	Pass	
2.3	15.407 (a)	6.2	-	Maximum Conducted Output Power	Pass	
2.4	15.407 (a)	6.2	-	Maximum Conducted Power Spectral Density	Pass	
2.5	15.407 (b)	6.2	-	Authorised Band Edges	Pass	
2.6	15.209 and 15.407 (b)	6.2	6.13 and 8.9	Spurious Radiated Emissions	Pass	
2.7	15.407 (h)(2)(iii)(iv)	6.3.2(c)(d)(e)	-	Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period	Pass	

Table 2



1.4 Product Information

1.4.1 Technical Description

The equipment under test (EUT) was a portable laptop computer.

1.4.2 Test Modes

The EUT's 5 GHz 802.11 radio supported Single Input/Single Output (SISO) and 2x2 Multiple Input/Multiple Output (MIMO) modes. 802.11a supports 20 MHz bandwidth only. 802.11n supports 20 MHz and 40 MHz bandwidths and 802.11ac and ax support 20 MHz, 40 MHz, 80 MHz & 160 MHz bandwidths.

802.11a mode supports SISO operation only. 802.11n, ac and ax support SISO, Cyclic Delay Diversity (CDD) and Space Division Multiplexing (SDM). 802.11n and ac also additionally support Transmit Beamforming (TxBF) mode for 20 MHz, 40 MHz and 80 MHz operation. The EUT supports 802.11ax Single User (SU) and Multi-User (MU) with all Resource Unit (RU) sizes from 52 subcarriers, up to the maximum allowed, dependent on channel bandwidth. Additionally, RU-26 is supported in U-NII-1 and U-NII-3.

The EUT uses different output powers dependent on how many cores are active. The EUT also uses different power tables for Cyclic Delay Diversity (CDD), Space Division Multiplexing (SDM) and Transmit Beamforming (TxBF) modes. It uses the same conducted power across all cores in any given mode, but due to the different antenna gains the radiated powers per core differ.

US and CA country codes change the power table used for U-NII band 1. Therefore U-NII-1 channels were tested using both power settings for each country's respective limits.

Band edge testing was performed in all modes with multiple modulation types, with only the worst-case reported. After band edge and additional preliminary investigations were performed to find worst-case operation, the EUT was tested in the following supported transmit modes:

SISO Modes (Core 0):

- 802.11a – 12 Mbps
- 802.11n HT20 – MCS2
- 802.11n HT40 – MCS2
- 802.11ac VHT80 – MCS2x1
- 802.11ac VHT160 – MCS2x1
- 802.11ax HE20 SU – MCS2x1
- 802.11ax HE40 SU – MCS2x1
- 802.11ax HE80 SU – MCS2x1
- 802.11ax HE160 SU – MCS2x1
- 802.11ax HE20 MU RU26/52/106 – MCS2x1

2x2 MIMO Modes (Core 0+1 for U-NII-1 / 2A / 2C / 3):

- 802.11n/ac (V)HT20 - CDD (MCS2), SDM (MCS10) and TxBF (MCS2x1)
- 802.11n/ac (V)HT40 - CDD (MCS2), SDM (MCS10) and TxBF (MCS2x1)
- 802.11ac VHT80 – CDD (MCS2x1), SDM (MCS2x2) and TxBF (MCS2x1)
- 802.11ac VHT160 – CDD (MCS2x1) and SDM (MCS2x2)
- 802.11ax HE20 SU – CDD (MCS2x1) and SDM (MCS2x2)
- 802.11ax HE40 SU – CDD (MCS2x1) and SDM (MCS2x2)
- 802.11ax HE80 SU – CDD (MCS2x1) and SDM (MCS2x2)
- 802.11ax HE160 SU – CDD (MCS2x1) and SDM (MCS2x2)
- 802.11ax HE20 MU RU26/52/106 – CDD (MCS2x1) and SDM (MCS2x2)



*Notes: The RU offset for bottom and middle channels were placed in the lowest position and on the top channel, the offset was placed in the upper most position. HT (802.11n) modes were used for CDD and SDM and VHT (802.11ac) modes were used for TxBF.

1.4.3 Test Setup

For conducted tests the EUT antennas were disconnected and replaced with U.FL to SMA test cables to enable conducted testing on each core. The loss of these test cables were known and compensated for in any conducted measurements.

For all testing except DFS the EUT was put into a continuous transmit test mode with the chipset manufacturer's test commands. The EUT then transmitted the required type of packeted 802.11 data frames of fixed length, containing the standard headers and with pseudo-random data content, ensuring the measured signals were representative and contained all the symbols at the highest power control level.

The test setup used for DFS is described in the test result section of the present document.

1.4.4 Antenna Gain Table

Antenna Port	Frequency Range (MHz)	Peak Gain (dBi)	Conducted Cable Loss (dB)
Core 0	5150 to 5250	6.00	1.07
	5250 to 5350	5.90	1.07
	5470 to 5725	4.00	1.17
	5725 to 5850	6.20	1.18
Core 1	5150 to 5250	4.50	1.07
	5250 to 5350	5.30	1.07
	5470 to 5725	3.10	1.17
	5725 to 5850	4.70	1.18

Table 3

1.5 Deviations from the Standard

No deviations from the applicable test standard were made during testing.



1.6 EUT Modification Record

The table below details modifications made to the EUT during the test programme.

The modifications incorporated during each test are recorded on the appropriate test pages.

Modification State	Description of Modification still fitted to EUT	Modification Fitted By	Date Modification Fitted
Model: A2991, Serial Number: N7RTH0WPW3			
0	As supplied by the customer	Not Applicable	Not Applicable
Model: A2991, Serial Number: XNJWHY732L			
0	As supplied by the customer	Not Applicable	Not Applicable
Model: A2991, Serial Number: Y7RPXWJ9N9			
0	As supplied by the customer	Not Applicable	Not Applicable
Model: A2991, Serial Number: LT4JJ1WVVR			
0	As supplied by the customer	Not Applicable	Not Applicable
Model: A2991, Serial Number: LRYJMC4D4			
0	As supplied by the customer	Not Applicable	Not Applicable
Model: A2991, Serial Number: J042FJ2R12			
0	As supplied by the customer	Not Applicable	Not Applicable

Table 4



1.7 Test Location

TÜV SÜD conducted the following tests at our Concorde Park Test Laboratory.

Test Name	Name of Engineer(s)	Accreditation
Configuration and Mode: 5 GHz WLAN		
Restricted Band Edges	Akhil Rajendran Bhaskaran Nair, Colin Brain, Dale Hills, Elliot Callender, Ian Hart, Morsalin Hossain, Thomas Randall and Tony Baby	UKAS
Emission Bandwidth	Feda Hussein and Mustafa Murad	UKAS
Maximum Conducted Output Power	Jayvir Makwana and Mustafa Murad	UKAS
Maximum Conducted Power Spectral Density	Mustafa Murad	UKAS
Authorised Band Edges	Akhil Rajendran Bhaskaran Nair, Elliot Callender, Ioan-Alexandru Bogatu, Michael Evans, Morsalin Hossain, Thomas Randall and Vineeth Nagaraj	UKAS
Spurious Radiated Emissions	Akhil Rajendran, Bhaskaran Nair, Colin Brain, James Woods, Morsalin Hossain, Thomas Randall and Vineeth Nagaraj	UKAS
Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period	Babitha Babu, Stefan Gilfedder and Tjijandjeua Tjizumaue	UKAS

Table 5

Office Address:

TÜV SÜD
Concorde Park
Concorde Way
Fareham
Hampshire
PO15 5FG
United Kingdom



2 Test Details

2.1 Restricted Band Edges

2.1.1 Specification Reference

FCC 47 CFR Part 15E, Clause 15.205
ISED RSS-247, Clause 3.3
ISED RSS-GEN, Clause 8.10

2.1.2 Equipment Under Test and Modification State

A2991, S/N: LRYJMC4D4 - Modification State 0
A2991, S/N: N7RTH0WPW3 - Modification State 0
A2991, S/N: XNJWHY732L - Modification State 0

2.1.3 Date of Test

30-June-2023 to 07-August-2023

2.1.4 Test Method

The test was performed in accordance with ANSI C63.10, clause 6.10.5.

Restricted Band Edge measurements were performed with the device operating across the various SISO and MIMO modes supported by the device.

The measurements displayed within this report have been limited to those modes which have been shown to be worst case.

Where duty cycle corrections were required for average results, these are included in the result tables but are not shown on the plots.

Further measurements are held on file by TÜV SÜD and are available if required.

2.1.5 Environmental Conditions

Ambient Temperature	21.4 - 23.4 °C
Relative Humidity	47.6 - 54.6 %




2.1.6 Test Results

5 GHz WLAN


20 MHz Bandwidth - Core 0 (SISO)

Mode	Data Rate/ MCS	Resource Size	Resource Index	TX Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dBμV/m)	Average Level (dBuV/m)
802.11a	54 Mbps	-	-	5180	5150	67.58	51.33
802.11a	54 Mbps	-	-	5200	5150	59.16	46.06
802.11n HT20	MCS4	-	-	5180	5150	67.37	51.34
802.11n HT20	MCS7	-	-	5200	5150	60.27	46.26
802.11ax HE20	MCS11x1	SU	-	5180	5150	69.29	50.33
802.11ax HE20	MCS11x1	106	53	5180	5150	61.60	46.58
802.11ax HE20	MCS11x1	SU	-	5200	5150	64.99	47.15
802.11a	54 Mbps	-	-	5300	5350	61.26	48.94
802.11a	54 Mbps	-	-	5320	5350	68.79	51.39
802.11n HT20	MCS2	-	-	5300	5350	60.19	48.70
802.11n HT20	MCS7	-	-	5320	5350	68.80	50.34
802.11ax HE20	MCS11x1	SU	-	5300	5350	65.30	47.82
802.11ax HE20	MCS4x1	SU	-	5320	5350	66.35	51.43
802.11ax HE20	MCS11x1	106	54	5320	5350	62.63	49.01
802.11a	54 Mbps	-	-	5500	5460	63.65	47.58
802.11a	54 Mbps	-	-	5520	5460	60.21	47.64
802.11n HT20	MCS4	-	-	5500	5460	63.64	48.68
802.11n HT20	MCS7	-	-	5520	5460	61.01	47.71
802.11ax HE20	MCS4x1	SU	-	5500	5460	63.50	49.14
802.11ax HE20	MCS11x1	106	53	5500	5460	60.48	47.40
802.11ax HE20	MCS11x1	SU	-	5520	5460	62.29	47.44


Table 6 - SISO Restricted Band Edge Results

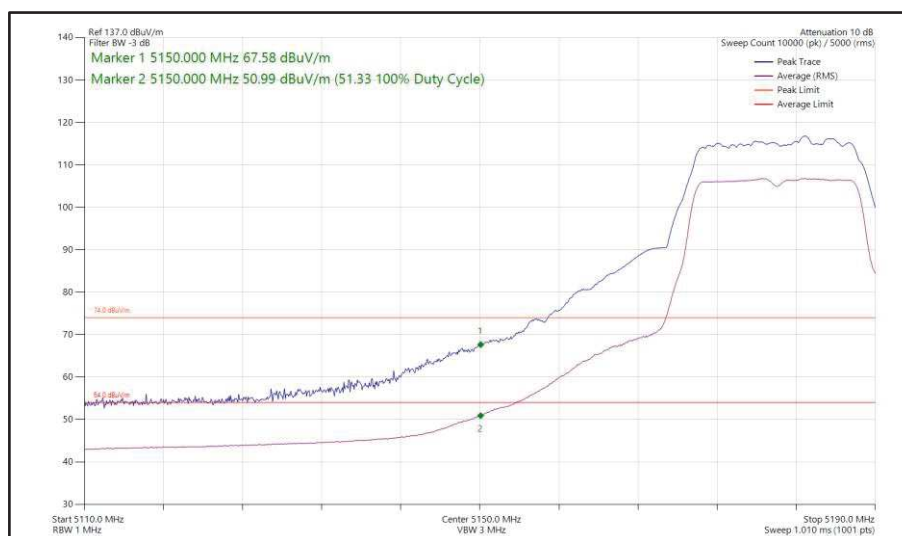


**Figure 1 - 802.11a, SISO, Core 0 - 5180 MHz
Band Edge Frequency 5150 MHz**

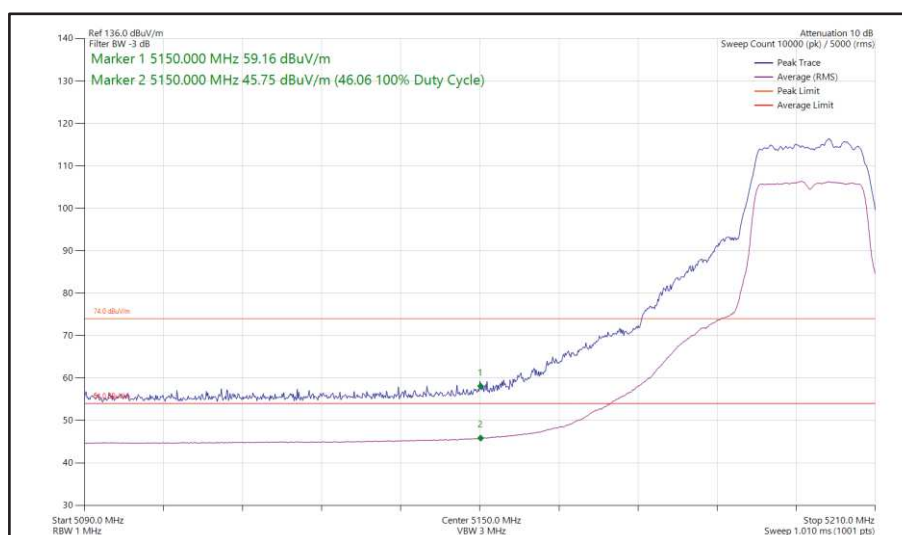


**Figure 2 - 802.11a, SISO, Core 0 - 5200 MHz
Band Edge Frequency 5150 MHz**

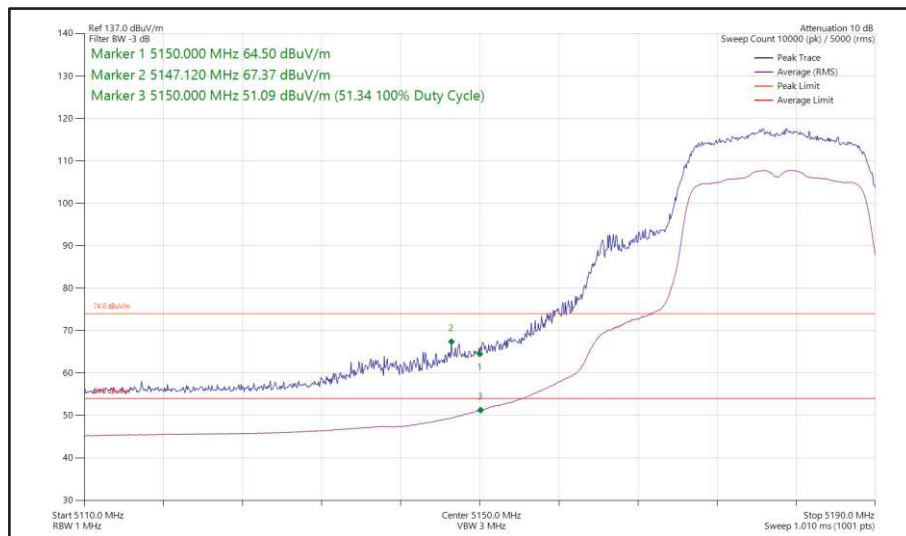


**Figure 3 - 802.11n HT20, SISO, Core 0 - 5180 MHz
Band Edge Frequency 5150 MHz**

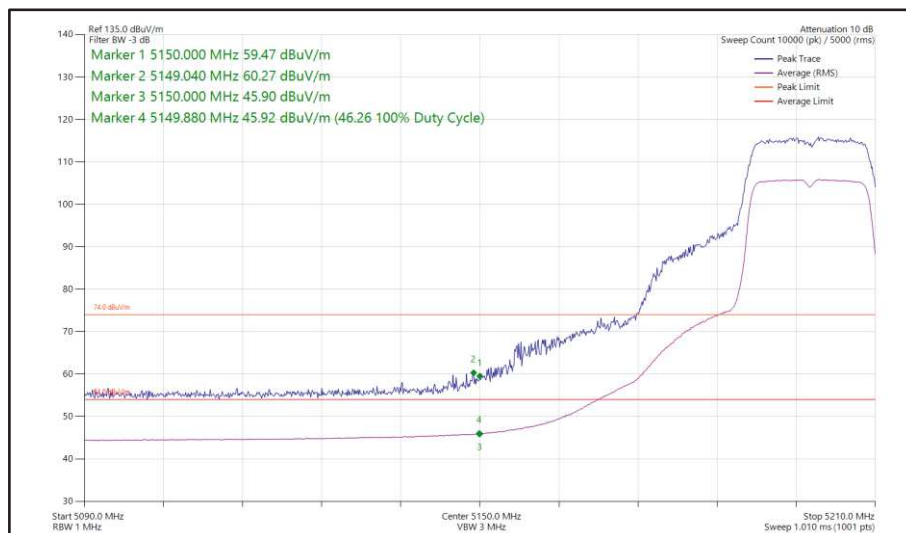


**Figure 4 - 802.11n HT20, SISO, Core 0 - 5200 MHz
Band Edge Frequency 5150 MHz**

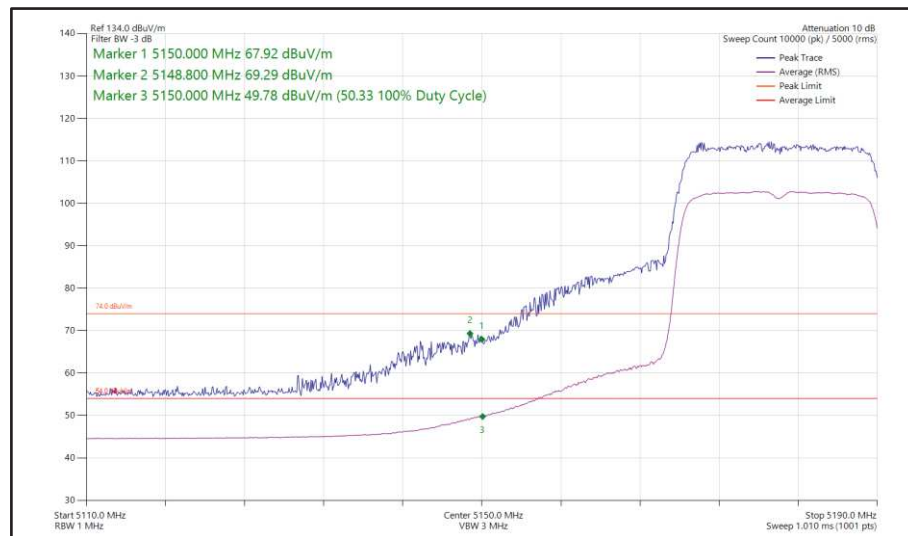


**Figure 5 - 802.11ax HE20, SU, SISO, Core 0 - 5180 MHz
Band Edge Frequency 5150 MHz**

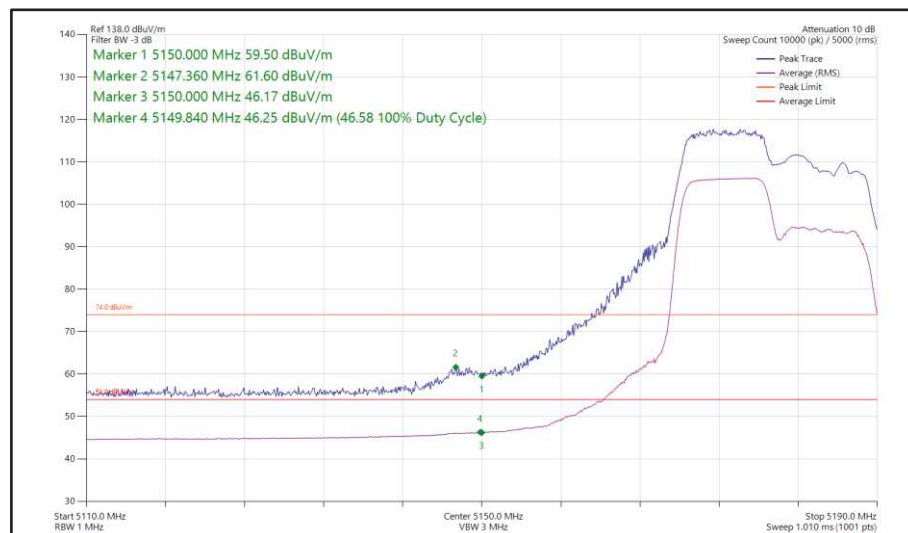


**Figure 6 - 802.11ax HE20, RU 106-53, SISO, Core 0 - 5180 MHz
Band Edge Frequency 5150 MHz**

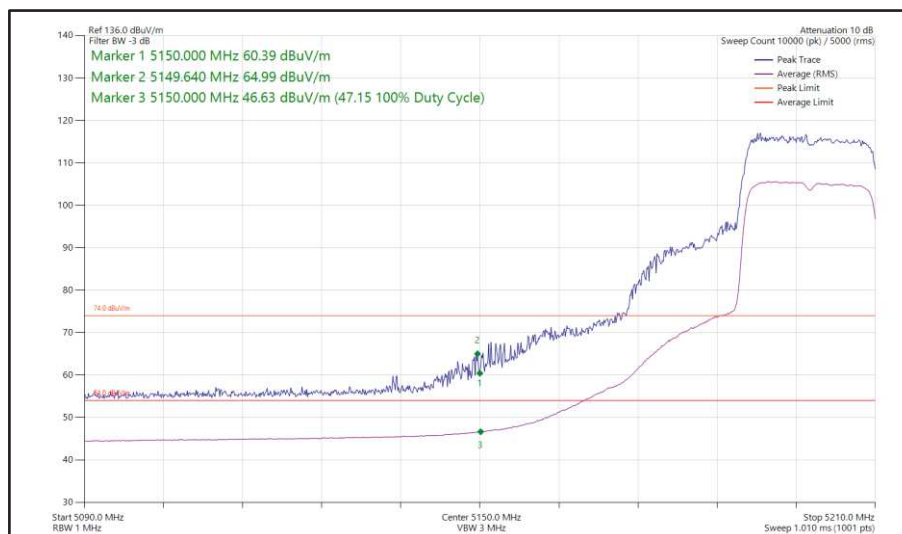


**Figure 7 - 802.11ax HE20, SU, SISO, Core 0 - 5200 MHz
Band Edge Frequency 5150 MHz**

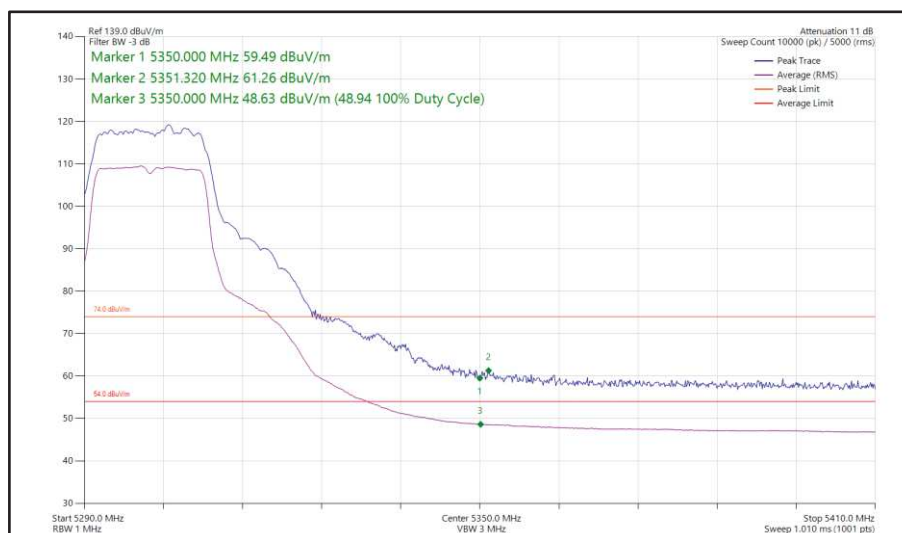

**Figure 8 - 802.11a, SISO, Core 0 - 5300 MHz
Band Edge Frequency 5350 MHz**

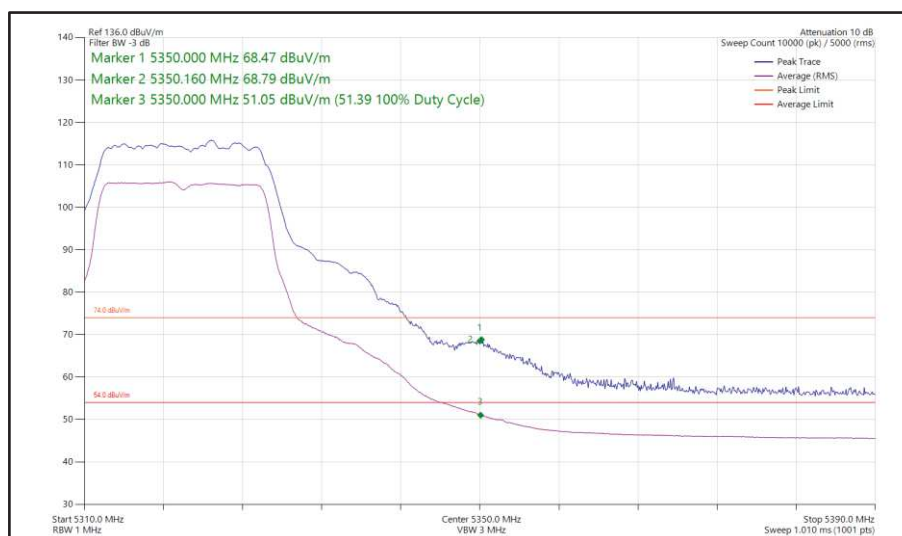

**Figure 9 - 802.11a, SISO, Core 0 - 5320 MHz
Band Edge Frequency 5350 MHz**

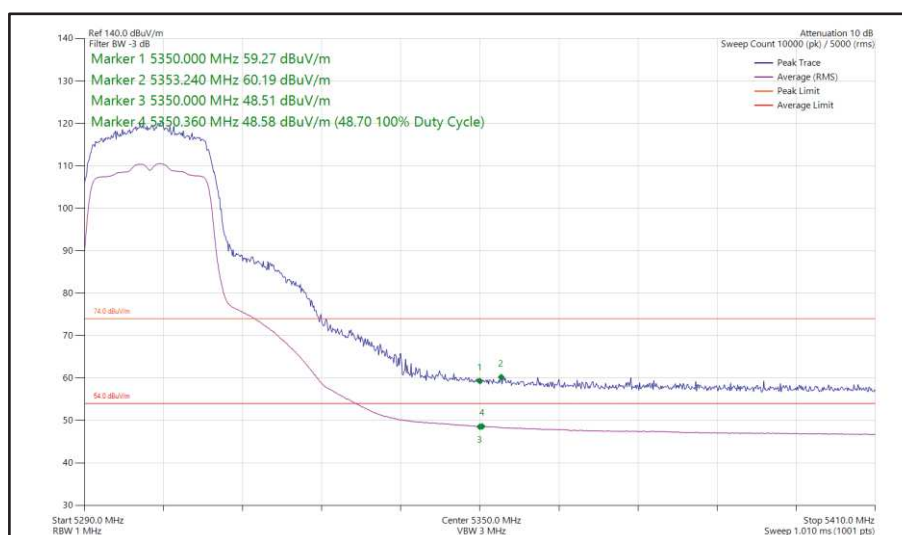

**Figure 10 - 802.11n HT20, SISO, Core 0 - 5300 MHz
Band Edge Frequency 5350 MHz**

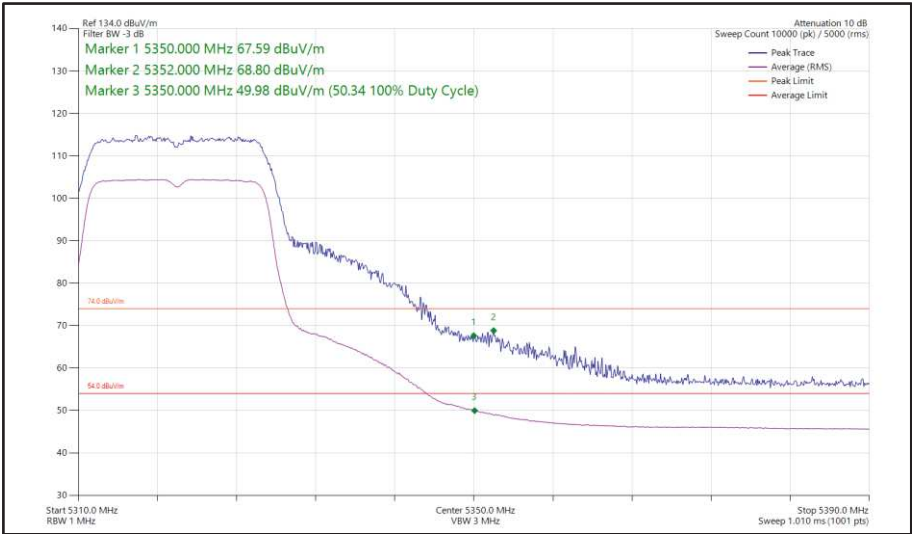


Figure 11 - 802.11n HT20, SISO, Core 0 - 5320 MHz
Band Edge Frequency 5350 MHz



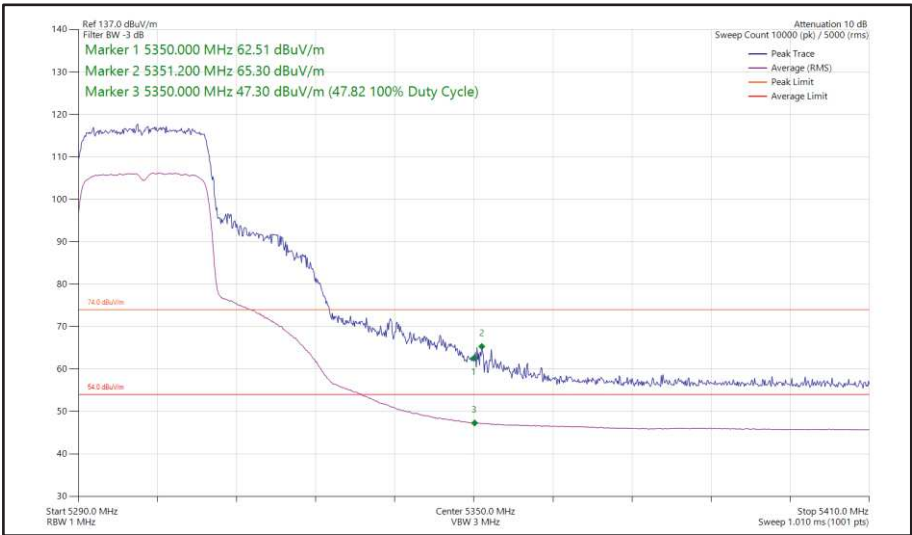



Figure 12 - 802.11ax HE20, SU, SISO, Core 0 - 5300 MHz
Band Edge Frequency 5350 MHz

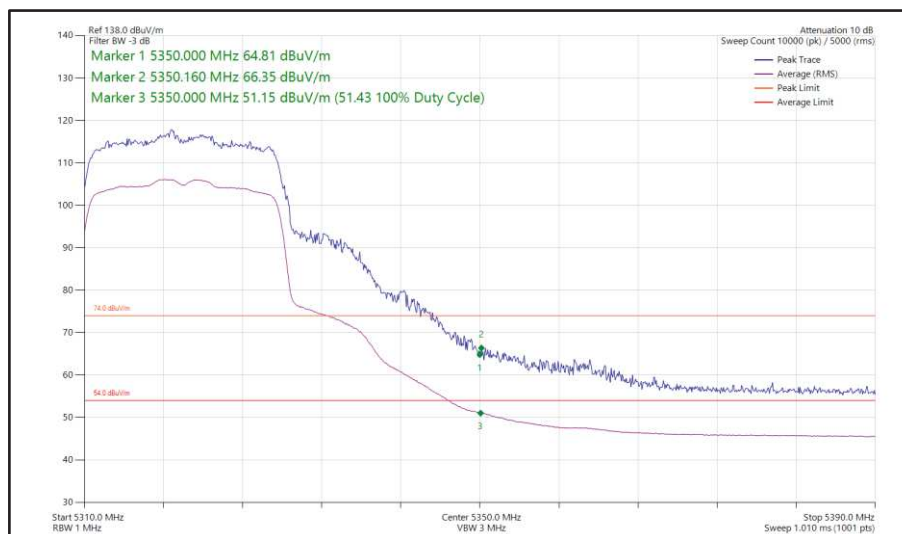


**Figure 13 - 802.11ax HE20, SU, SISO, Core 0 - 5320 MHz
Band Edge Frequency 5350 MHz**

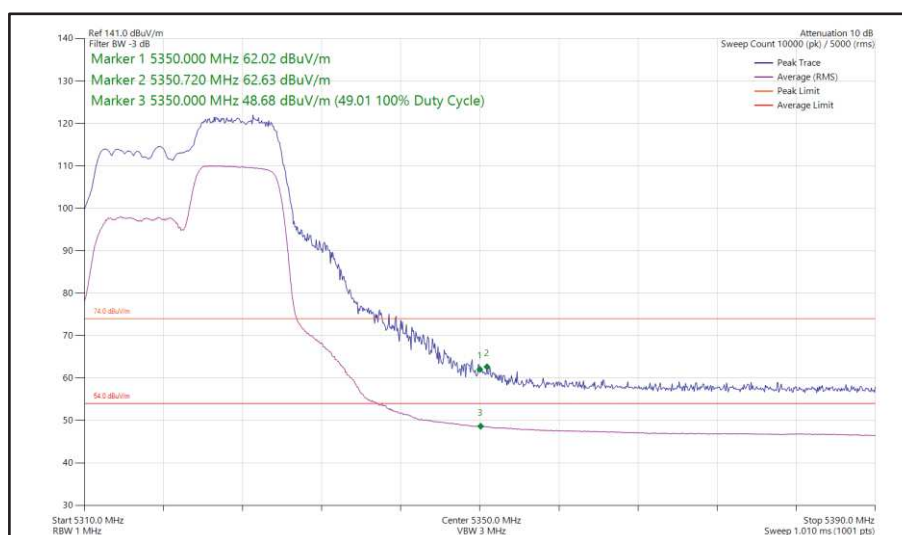


**Figure 14 - 802.11ax HE20, RU 106-54, SISO, Core 0 - 5320 MHz
Band Edge Frequency 5350 MHz**

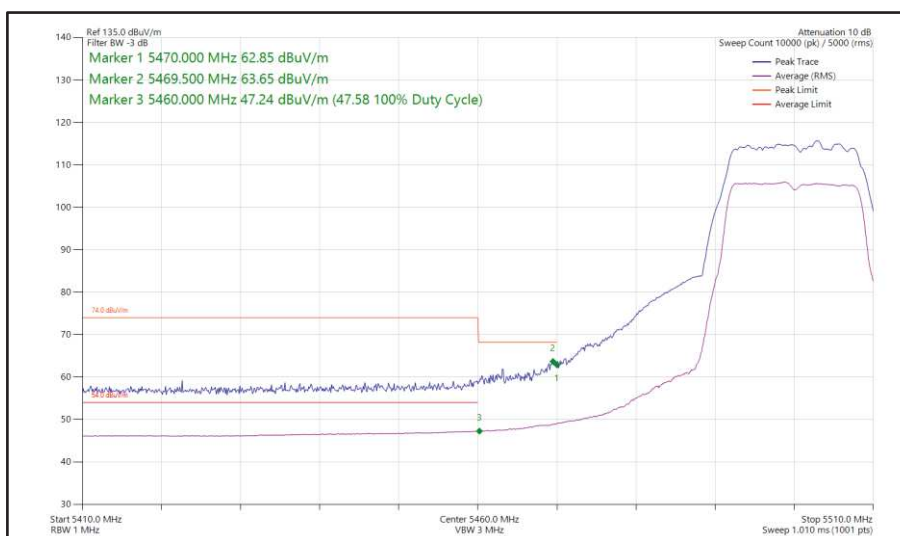


**Figure 15 - 802.11a, SISO, Core 0 - 5500 MHz
Band Edge Frequency 5460 MHz**

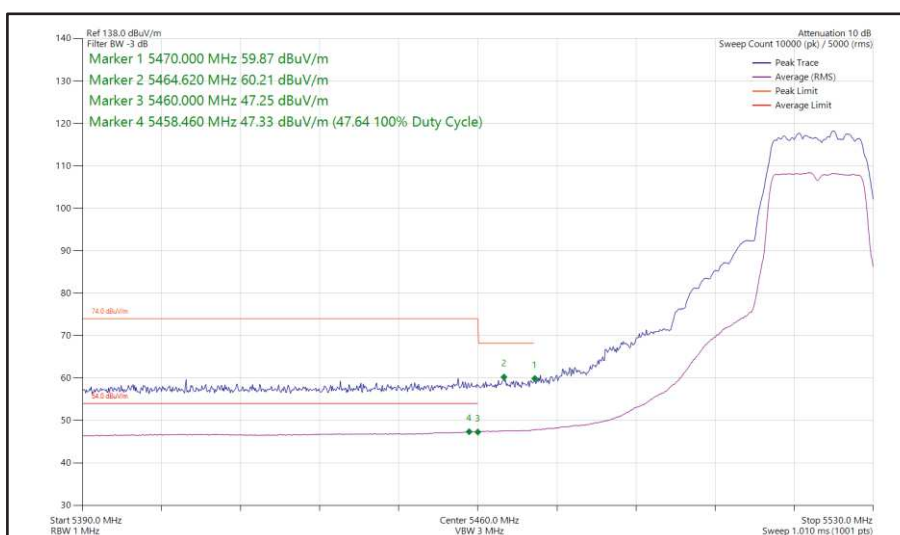


**Figure 16 - 802.11a, SISO, Core 0 - 5520 MHz
Band Edge Frequency 5460 MHz**

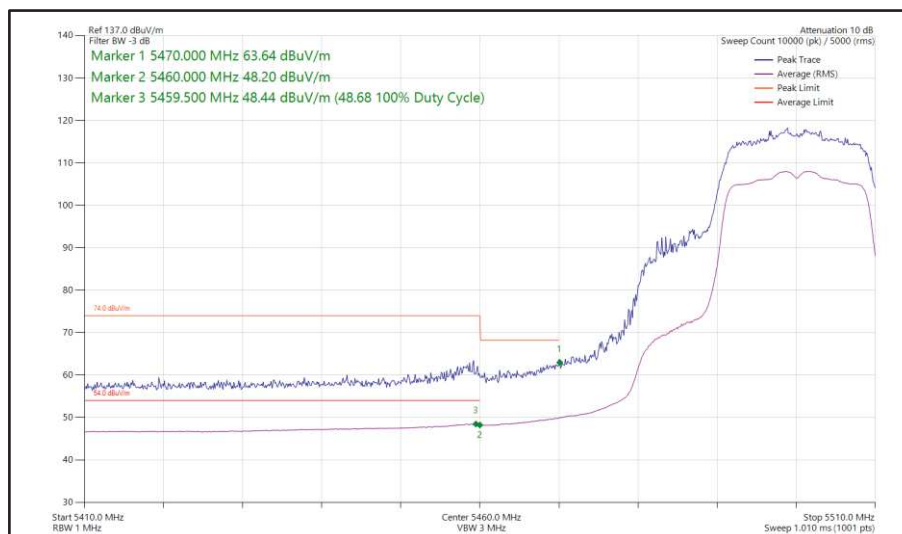


**Figure 17 - 802.11n HT20, SISO, Core 0 - 5500 MHz
Band Edge Frequency 5460 MHz**

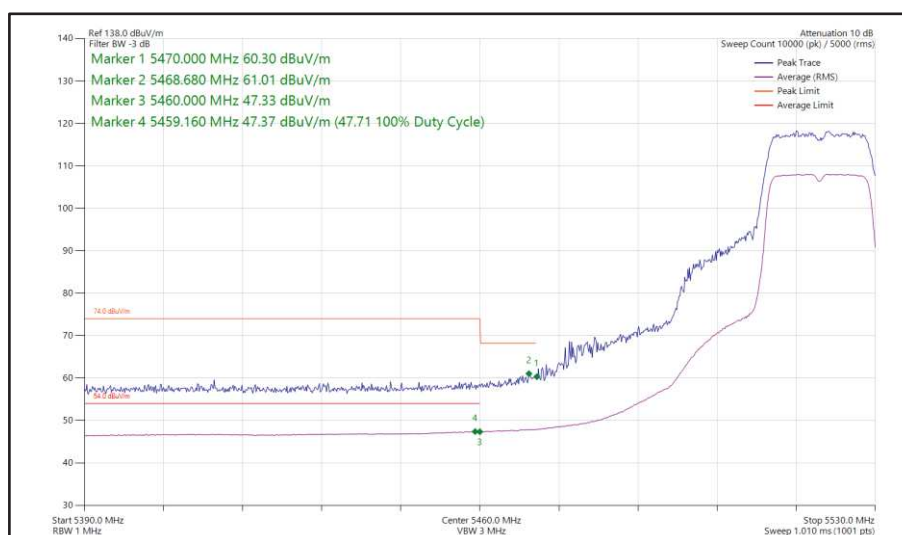


**Figure 18 - 802.11n HT20, SISO, Core 0 - 5520 MHz
Band Edge Frequency 5460 MHz**

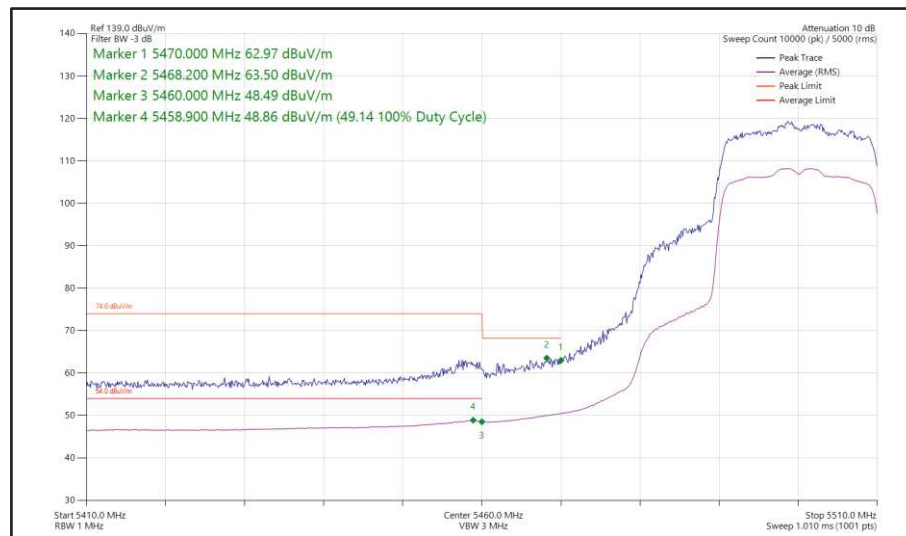

**Figure 19 - 802.11ax HE20, SU, SISO, Core 0 - 5500 MHz
Band Edge Frequency 5460 MHz**

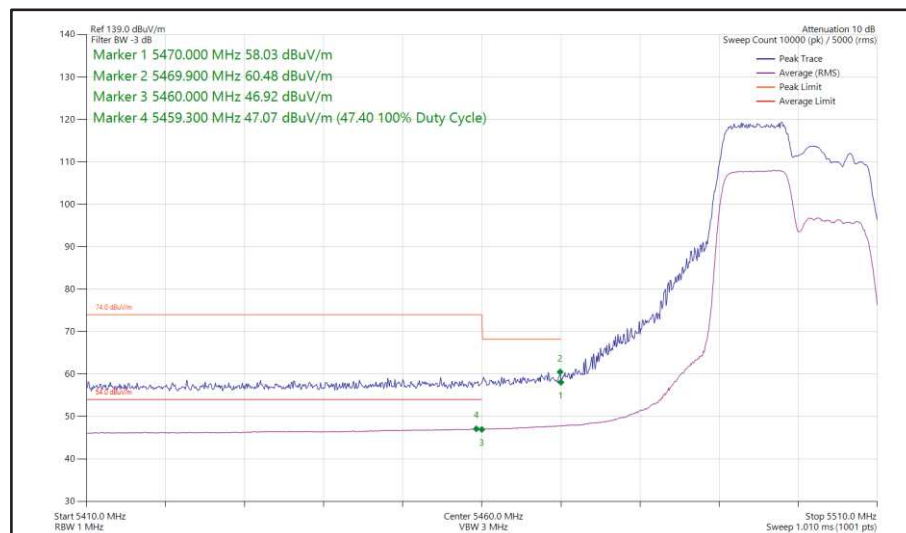

**Figure 20 - 802.11ax HE20, RU 106-53, SISO, Core 0 - 5500 MHz
Band Edge Frequency 5460 MHz**

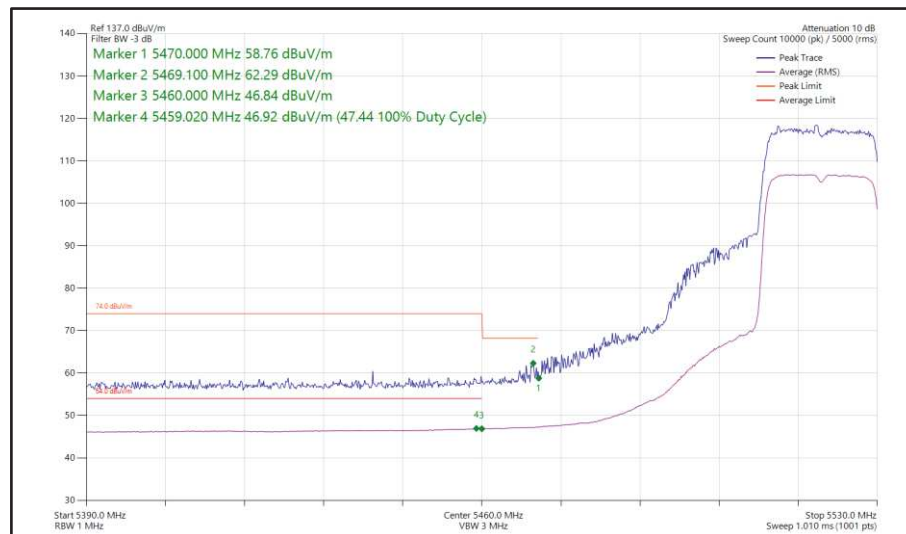

**Figure 21 - 802.11ax HE20, SU, SISO, Core 0 - 5520 MHz
Band Edge Frequency 5460 MHz**



20 MHz Bandwidth - Core 1 (SISO)

Mode	Data Rate/ MCS	Resource Size	Resource Index	TX Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dBμV/m)	Average Level (dBμV/m)
802.11a	54 Mbps	-	-	5180	5150	67.16	51.28
802.11a	24 Mbps	-	-	5200	5150	58.97	47.33
802.11n HT20	MCS4	-	-	5180	5150	65.77	51.12
802.11n HT20	MCS7	-	-	5200	5150	61.00	47.39
802.11ax HE20	MCS2x1	SU	-	5180	5150	63.73	51.11
802.11ax HE20	MCS11x1	106	53	5180	5150	62.69	48.22
802.11ax HE20	MCS11x1	SU	-	5200	5150	65.36	47.77
802.11a	24 Mbps	-	-	5300	5350	60.31	47.73
802.11a	24 Mbps	-	-	5320	5350	67.04	51.49
802.11n HT20	MCS2	-	-	5300	5350	59.98	47.90
802.11n HT20	MCS4	-	-	5320	5350	67.26	51.23
802.11ax HE20	MCS11x1	SU	-	5300	5350	66.10	48.57
802.11ax HE20	MCS11x1	SU	-	5320	5350	69.15	50.19
802.11ax HE20	MCS11x1	106	53	5320	5350	62.10	48.32
802.11a	12 Mbps	-	-	5500	5460	63.48	48.32
802.11a	54 Mbps	-	-	5520	5460	60.55	46.96
802.11n HT20	MCS4	-	-	5500	5460	63.57	47.57
802.11n HT20	MCS7	-	-	5520	5460	60.62	47.18
802.11ax HE20	MCS11x1	SU	-	5500	5460	63.46	46.48
802.11ax HE20	MCS11x1	106	53	5500	5460	59.56	46.97
802.11ax HE20	MCS11x1	SU	-	5520	5460	63.31	47.00

Oct 2nd Table 7 - SISO Restricted Band Edge Results



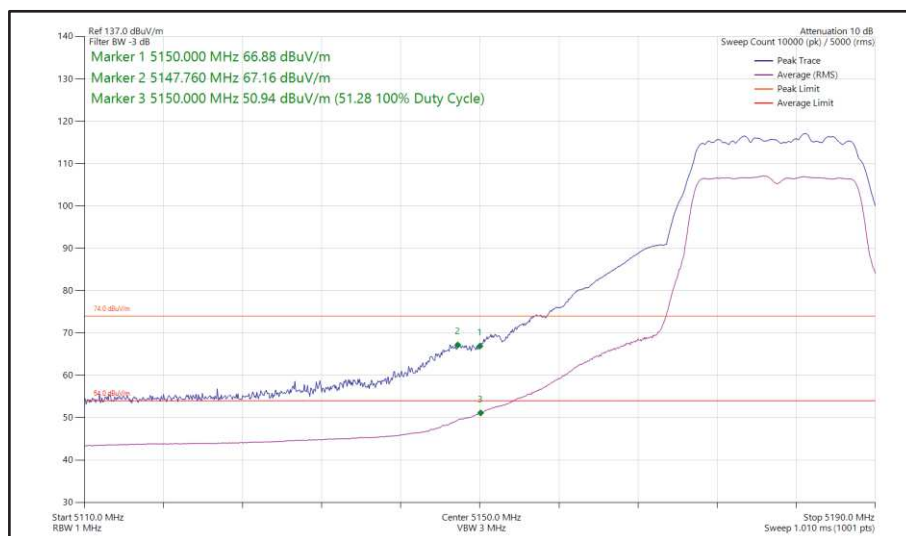



Figure 22 - 802.11a, SISO, Core 1 - 5180 MHz
Band Edge Frequency 5150 MHz

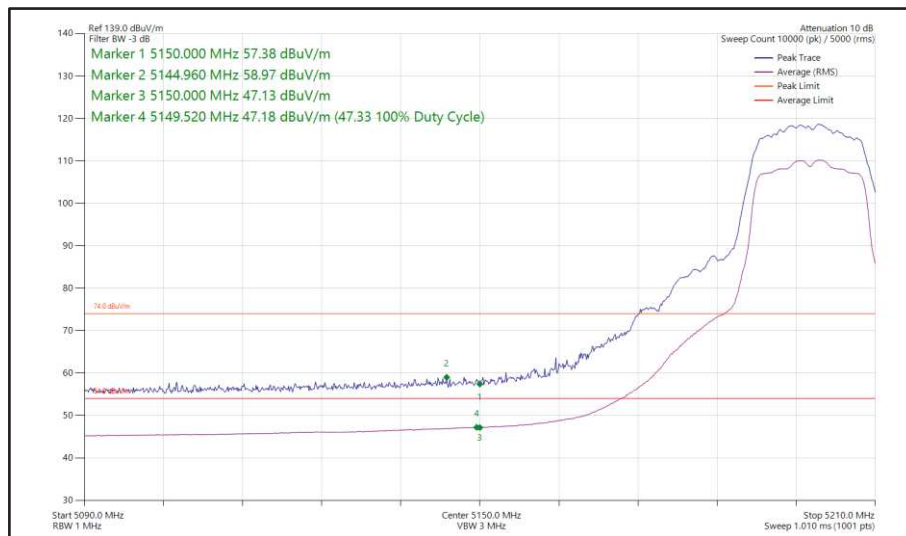


**Figure 23 - 802.11a, SISO, Core 1 - 5200 MHz
Band Edge Frequency 5150 MHz**

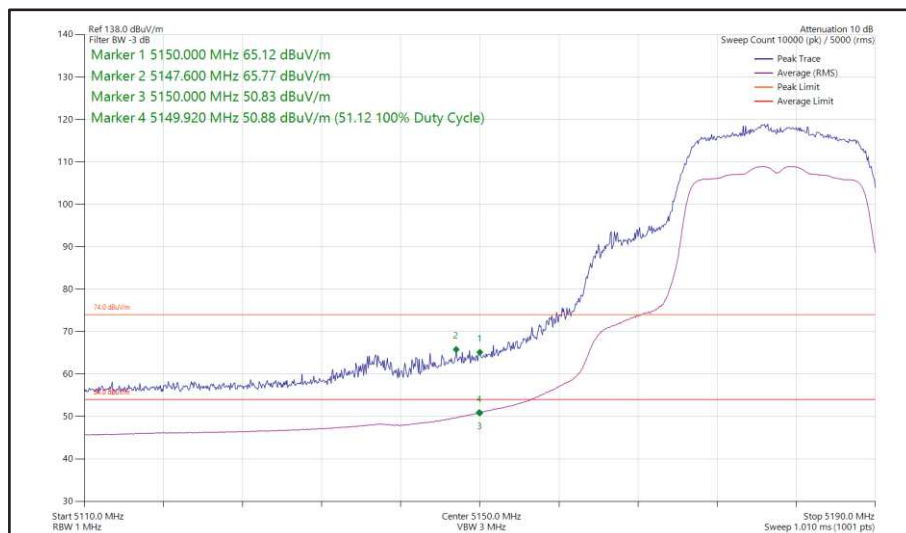


**Figure 24 - 802.11n HT20, SISO, Core 1 - 5180 MHz
Band Edge Frequency 5150 MHz**

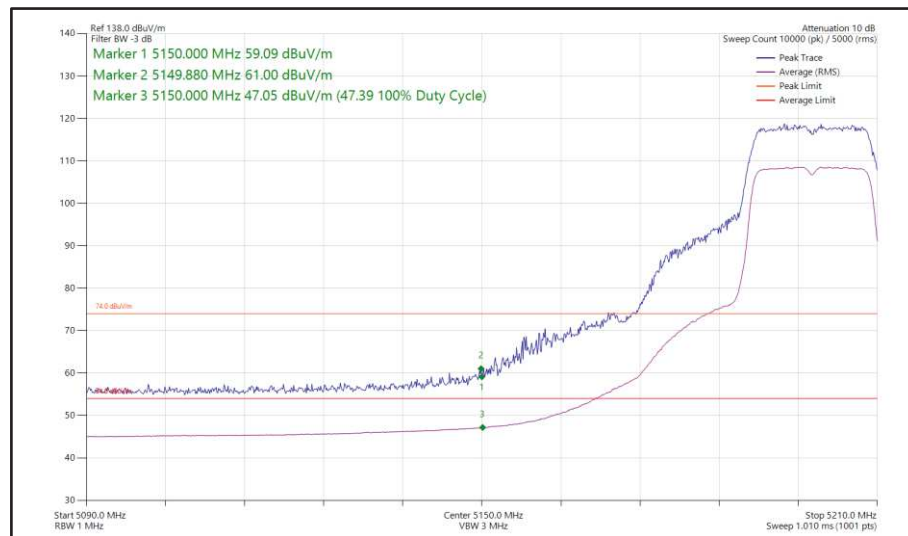


**Figure 25 - 802.11n HT20, SISO, Core 1 - 5200 MHz
Band Edge Frequency 5150 MHz**

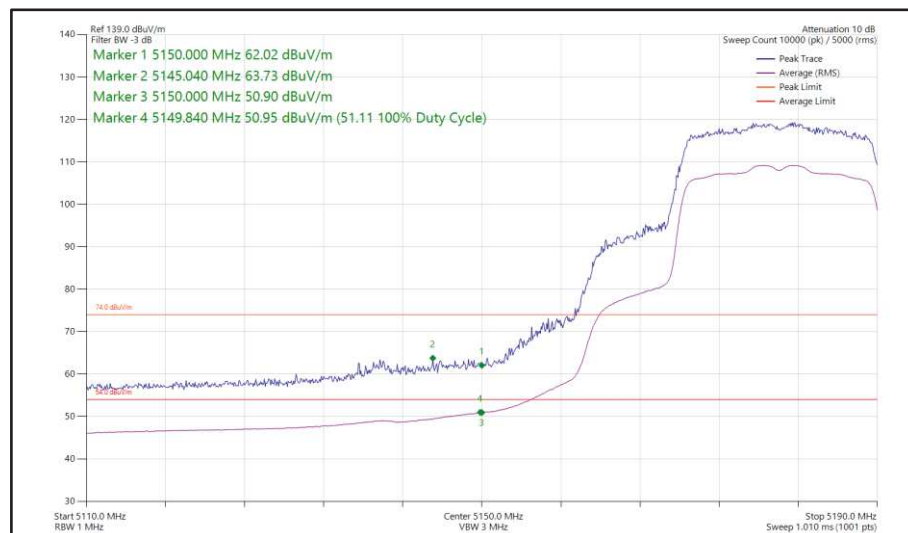


**Figure 26 - 802.11ax HE20, SU, SISO, Core 1 - 5180 MHz
Band Edge Frequency 5150 MHz**

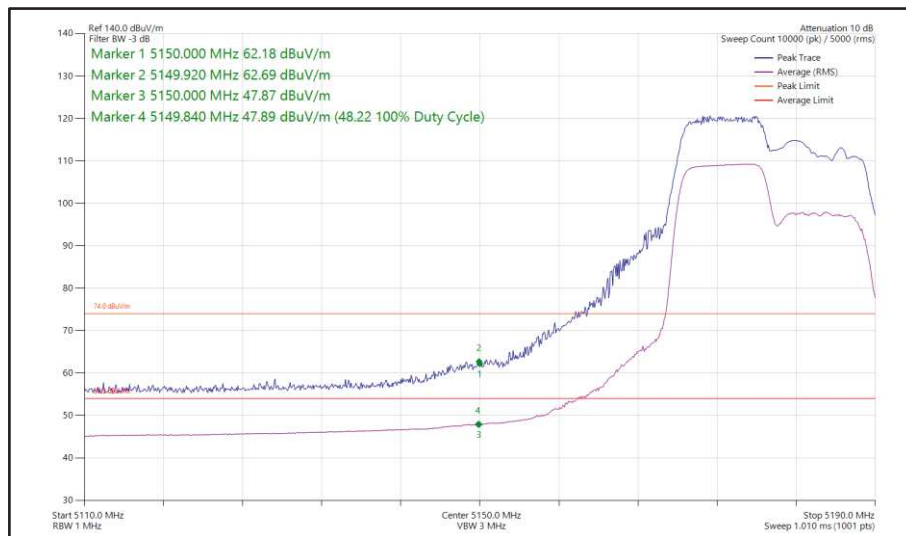


**Figure 27 - 802.11ax HE20, RU 106-53, SISO, Core 1 - 5180 MHz
Band Edge Frequency 5150 MHz**

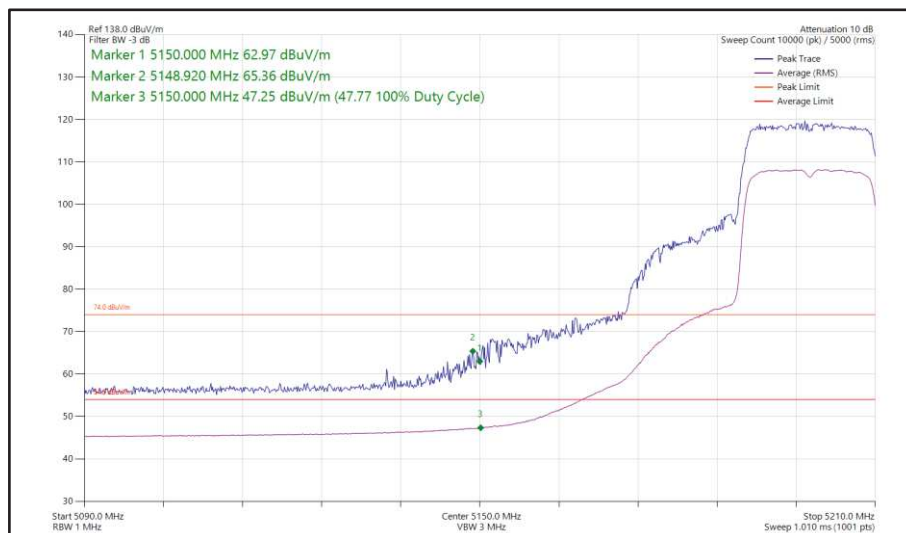


**Figure 28 - 802.11ax HE20, SU, SISO, Core 1 - 5200 MHz
Band Edge Frequency 5150 MHz**

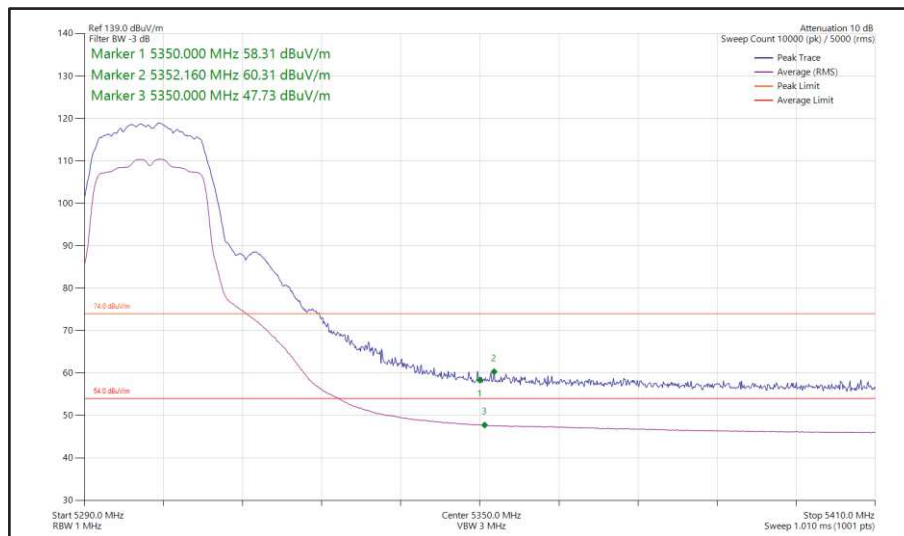


**Figure 29 - 802.11a, SISO, Core 1 - 5300 MHz
Band Edge Frequency 5350 MHz**

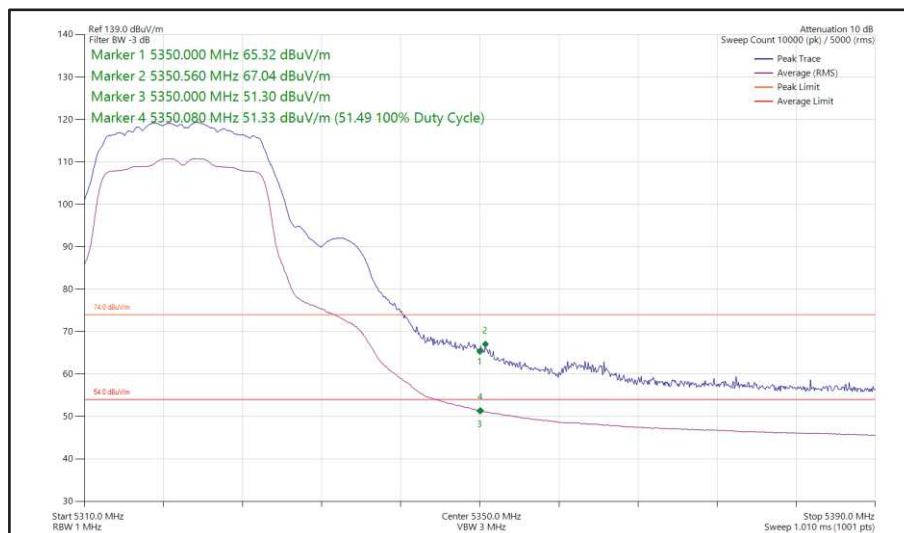


**Figure 30 - 802.11a, SISO, Core 1 - 5320 MHz
Band Edge Frequency 5350 MHz**

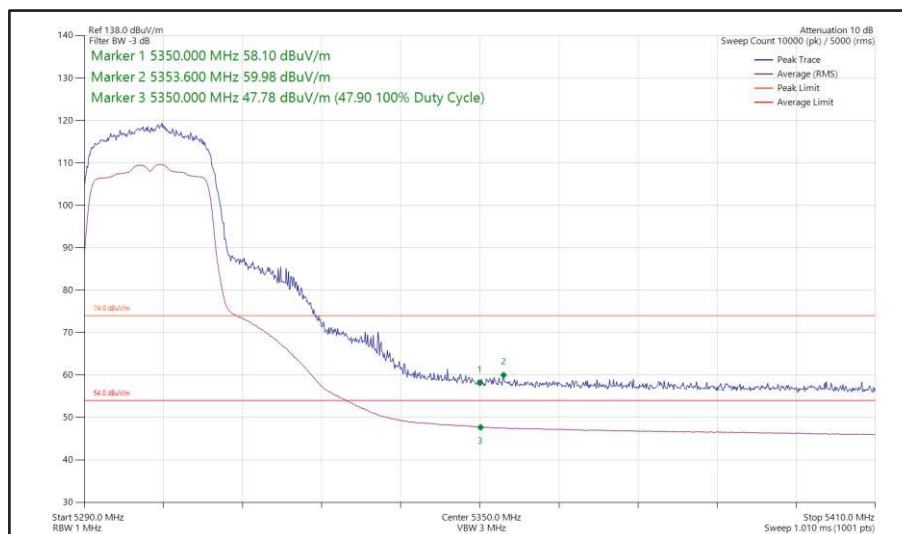


**Figure 31 - 802.11n HT20, SISO, Core 1 - 5300 MHz
Band Edge Frequency 5350 MHz**

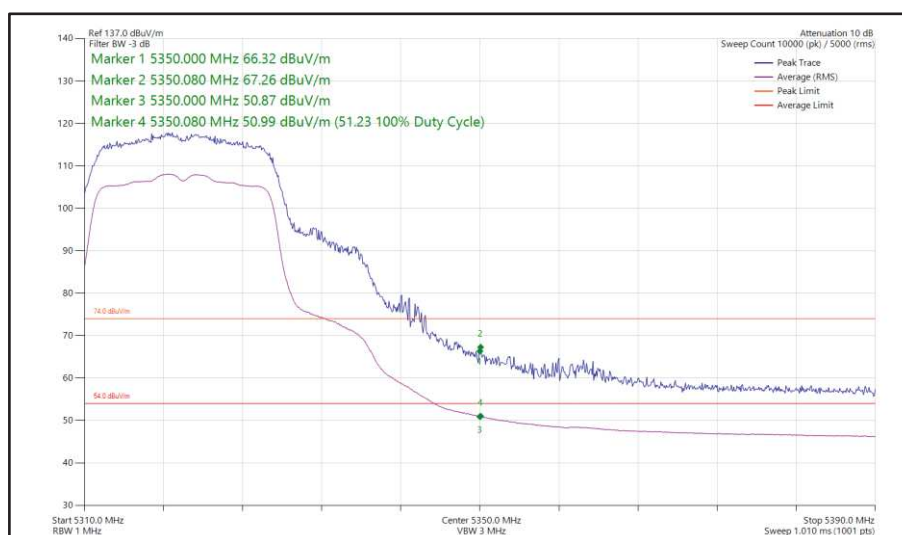


**Figure 32 - 802.11n HT20, SISO, Core 1 - 5320 MHz
Band Edge Frequency 5350 MHz**

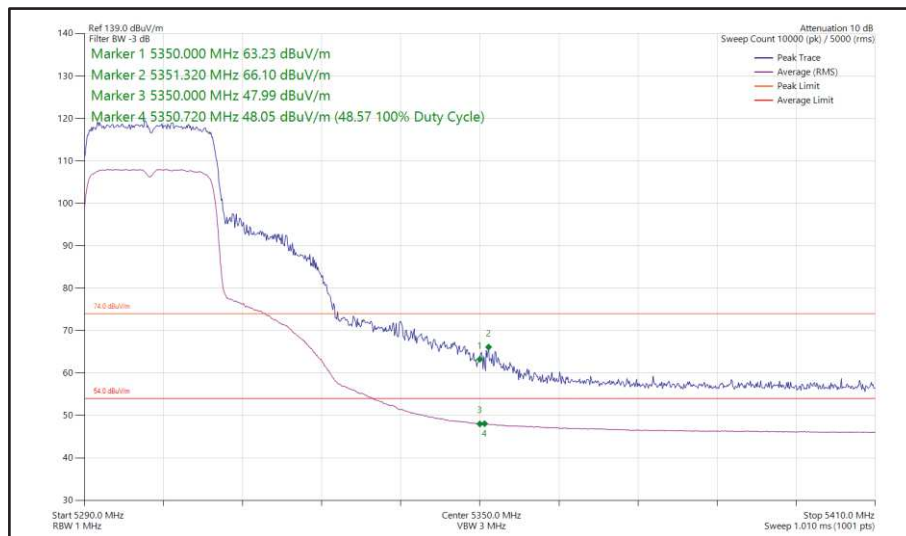


**Figure 33 - 802.11ax HE20, SU, SISO, Core 1 - 5300 MHz
Band Edge Frequency 5350 MHz**

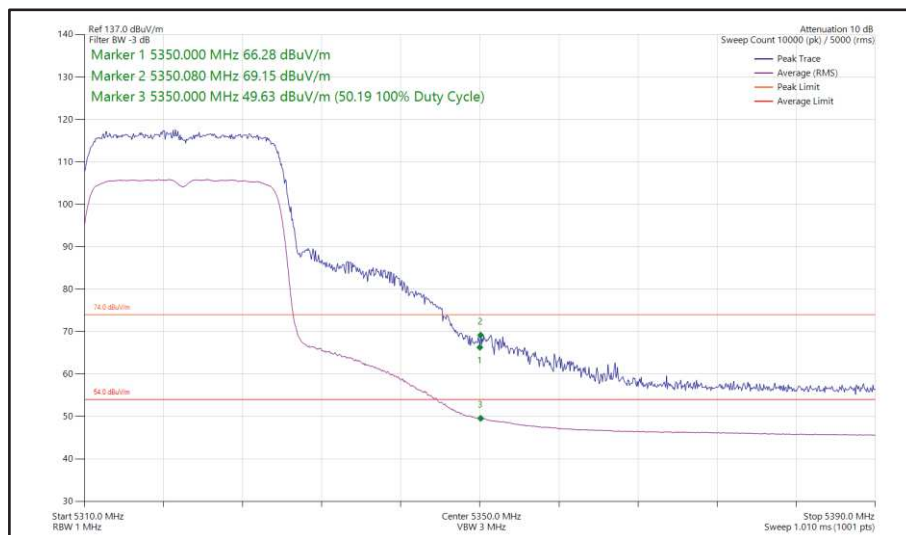


**Figure 34 - 802.11ax HE20, SU, SISO, Core 1 - 5320 MHz
Band Edge Frequency 5350 MHz**

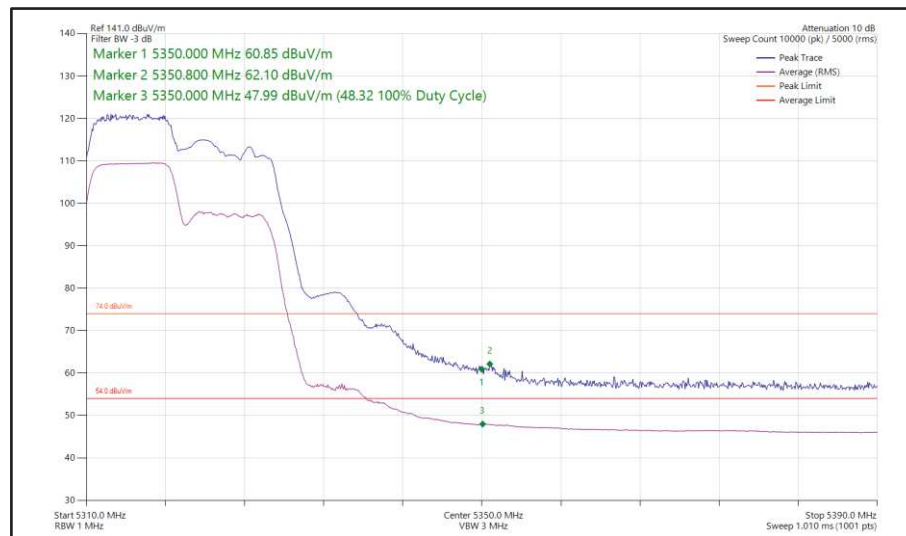


**Figure 35 - 802.11ax HE20, RU 106-53, SISO, Core 1 - 5320 MHz
Band Edge Frequency 5350 MHz**

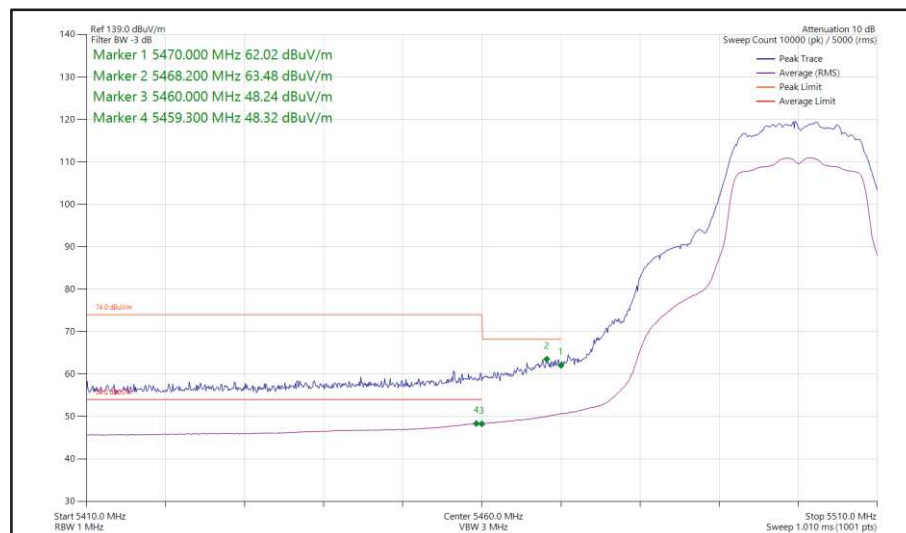


**Figure 36 - 802.11a, SISO, Core 1 - 5500 MHz
Band Edge Frequency 5460 MHz**

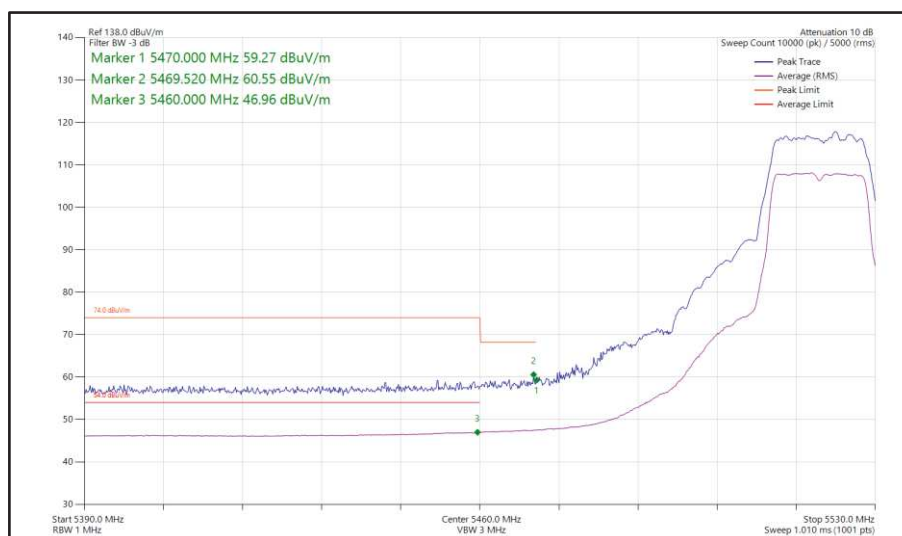


**Figure 37 - 802.11a, SISO, Core 1 - 5520 MHz
Band Edge Frequency 5460 MHz**

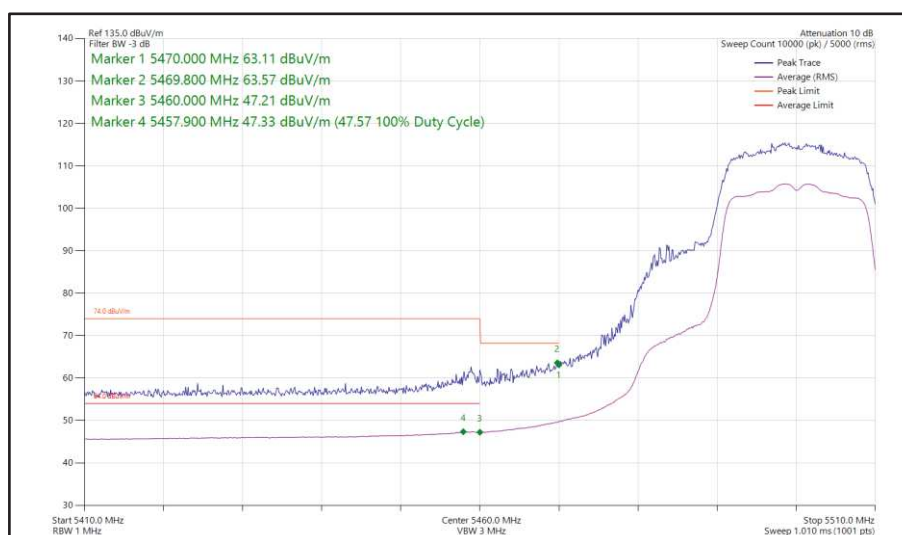


**Figure 38 - 802.11n HT20, SISO, Core 1 - 5500 MHz
Band Edge Frequency 5460 MHz**

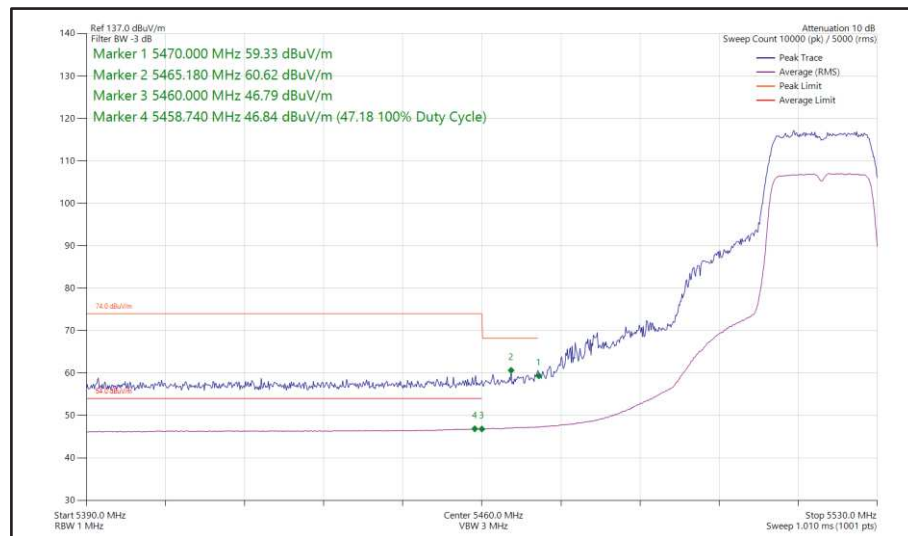


**Figure 39 - 802.11n HT20, SISO, Core 1 - 5520 MHz
Band Edge Frequency 5460 MHz**

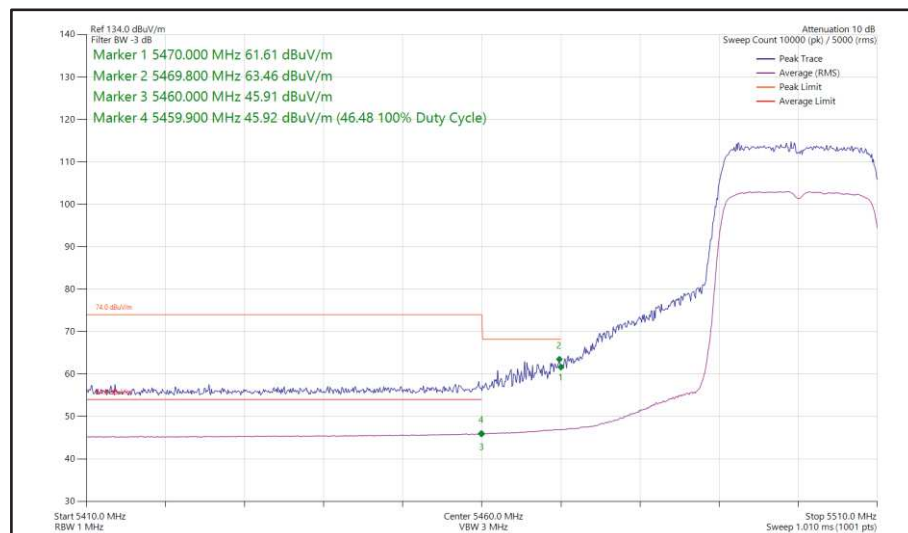

**Figure 40 - 802.11ax HE20, SU, SISO, Core 1 - 5500 MHz
Band Edge Frequency 5460 MHz**

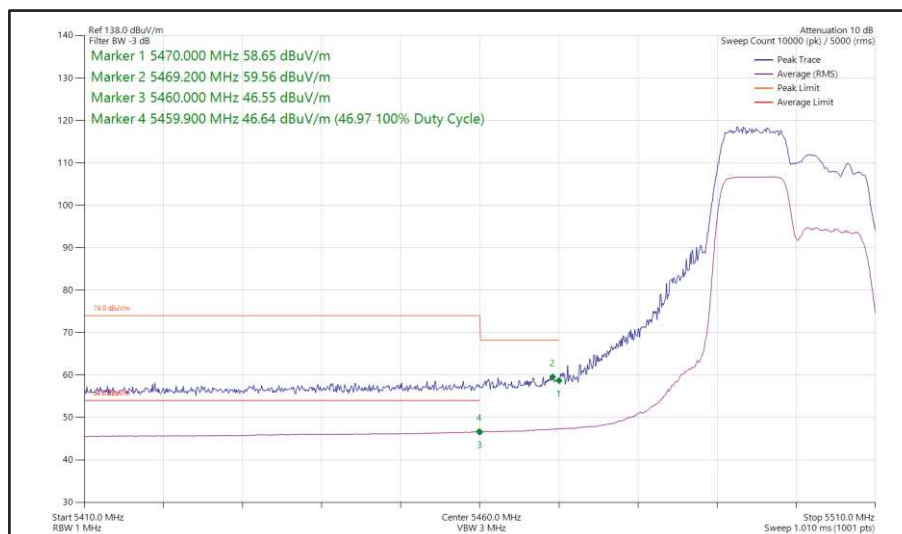

**Figure 41 - 802.11ax HE20, RU 106-53, SISO, Core 1 - 5500 MHz
Band Edge Frequency 5460 MHz**

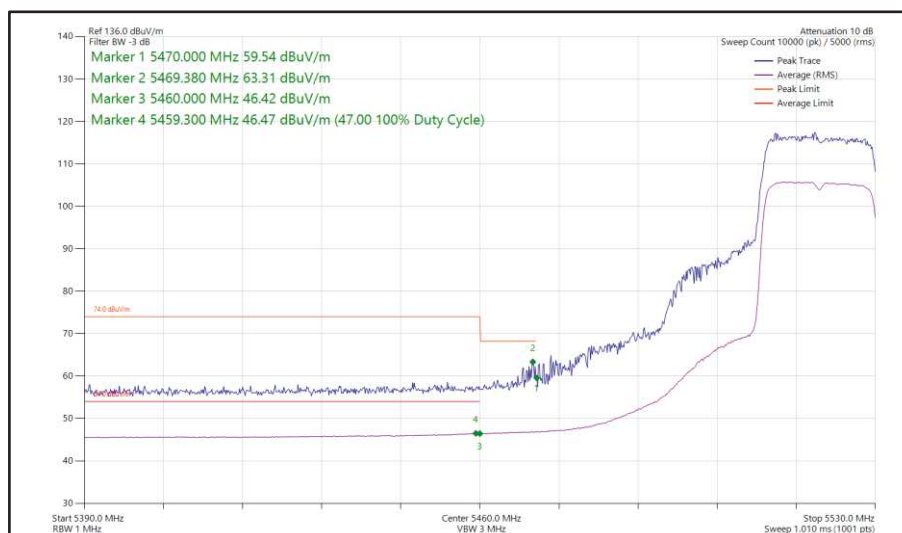


**Figure 42 - 802.11ax HE20, SU, SISO, Core 1 - 5520 MHz
Band Edge Frequency 5460 MHz**




20 MHz Bandwidth - Core 0 + Core 1 (CDD)

Mode	Data Rate/ MCS	Resource Size	Resource Index	TX Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dBμV/m)	Average Level (dBμV/m)
802.11n HT20	MCS4	-	-	5180	5150	65.06	51.46
802.11n HT20	MCS7	-	-	5200	5150	63.78	49.20
802.11ax HE20	MCS11x1	SU	-	5180	5150	69.36	50.81
802.11ax HE20	MCS11x1	106	54	5180	5150	64.55	49.69
802.11ax HE20	MCS11x1	SU	-	5200	5150	67.62	49.33
802.11n HT20	MCS7	-	-	5300	5350	64.49	50.55
802.11n HT20	MCS2	-	-	5320	5350	62.43	51.18
802.11ax HE20	MCS11x1	SU	-	5300	5350	67.15	50.35
802.11ax HE20	MCS11x1	SU	-	5320	5350	69.23	49.65
802.11ax HE20	MCS11x1	106	53	5320	5350	62.48	50.08
802.11n HT20	MCS2	-	-	5500	5460	63.53	50.60
802.11n HT20	MCS7	-	-	5520	5460	62.57	49.15
802.11ax HE20	MCS4x1	SU	-	5500	5460	63.65	50.09
802.11ax HE20	MCS11x1	106	54	5500	5460	62.90	47.59
802.11ax HE20	MCS11x1	SU	-	5520	5460	62.60	48.36


Table 8 - CDD Restricted Band Edge Results

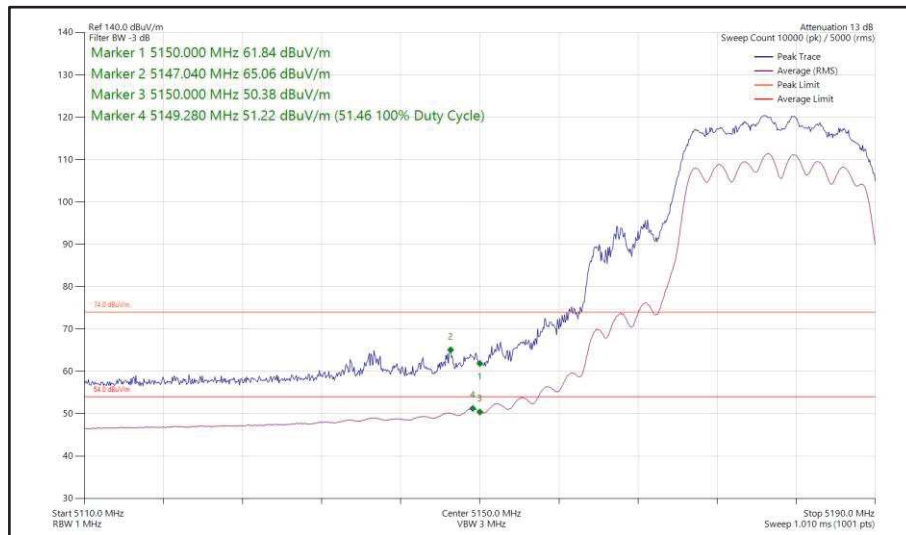


**Figure 43 - 802.11n HT20, CDD, Core 0 + Core 1 - 5180 MHz
Band Edge Frequency 5150 MHz**

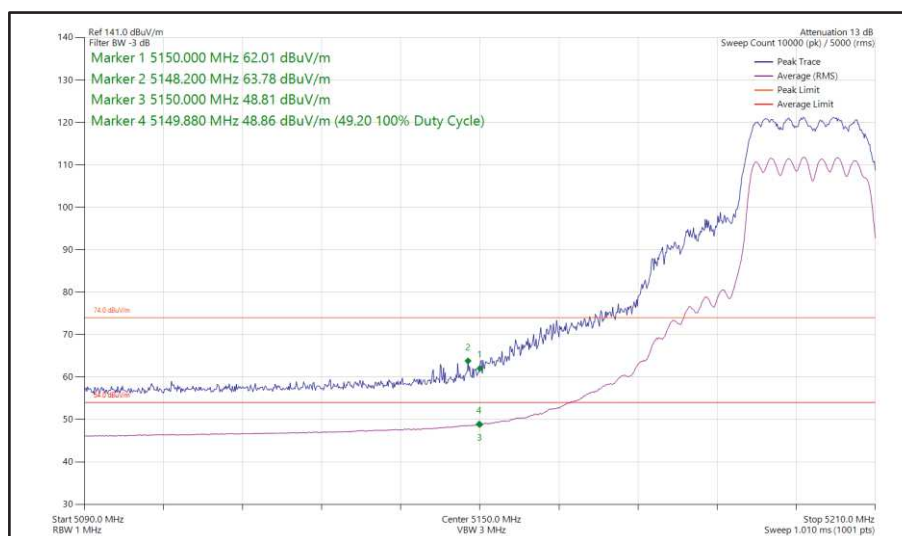


**Figure 44 - 802.11n HT20, CDD, Core 0 + Core 1 - 5200 MHz
Band Edge Frequency 5150 MHz**

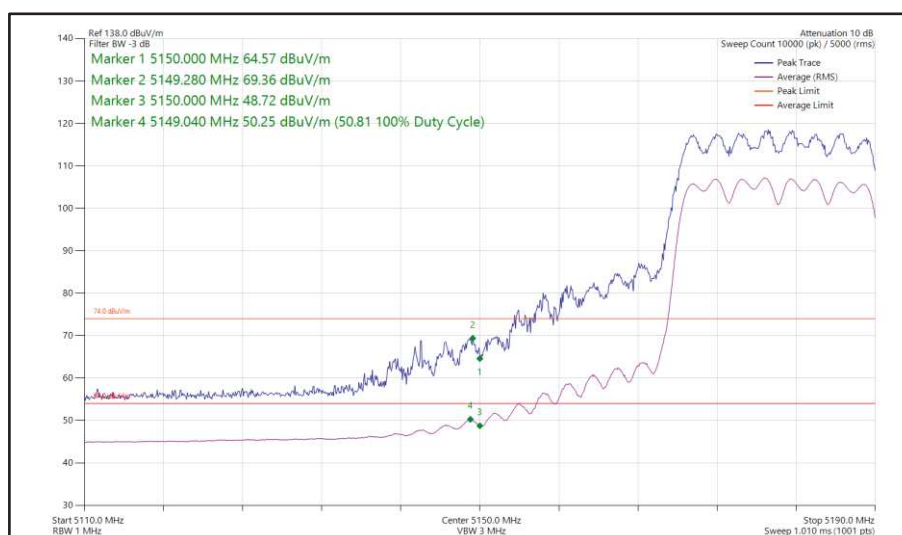


**Figure 45 - 802.11ax HE20, SU, CDD, Core 0 + Core 1 - 5180 MHz
Band Edge Frequency 5150 MHz**

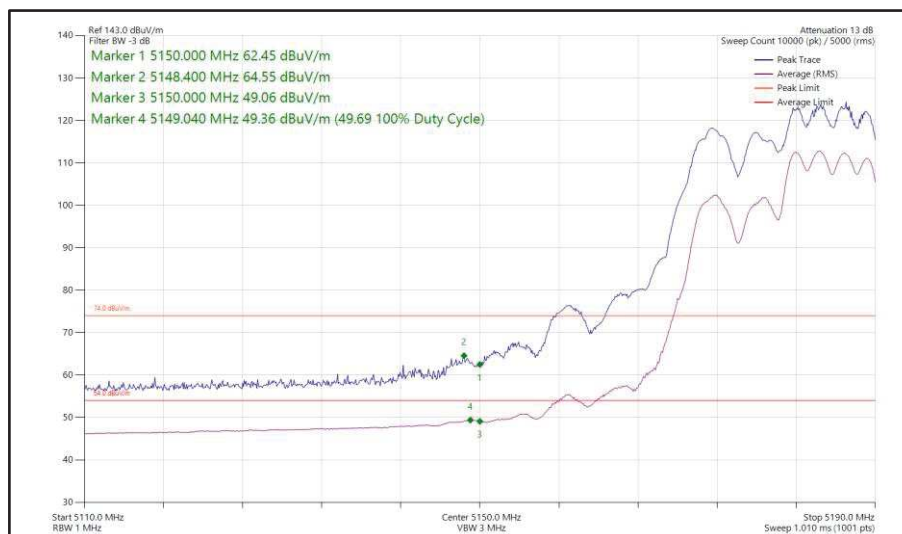


**Figure 46 - 802.11ax HE20, RU 106-54, CDD, Core 0 + Core 1 - 5180 MHz
Band Edge Frequency 5150 MHz**

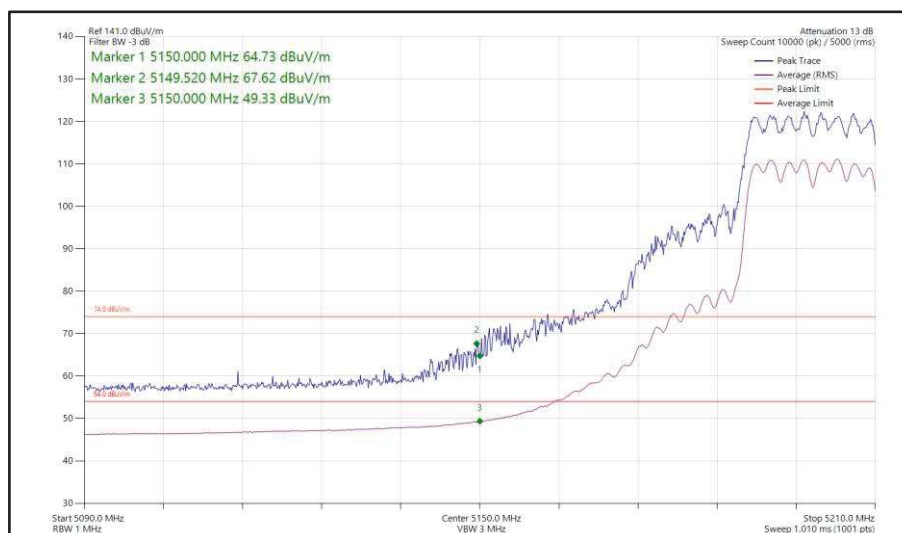


**Figure 47 - 802.11ax HE20, SU, CDD, Core 0 + Core 1 - 5200 MHz
Band Edge Frequency 5150 MHz**

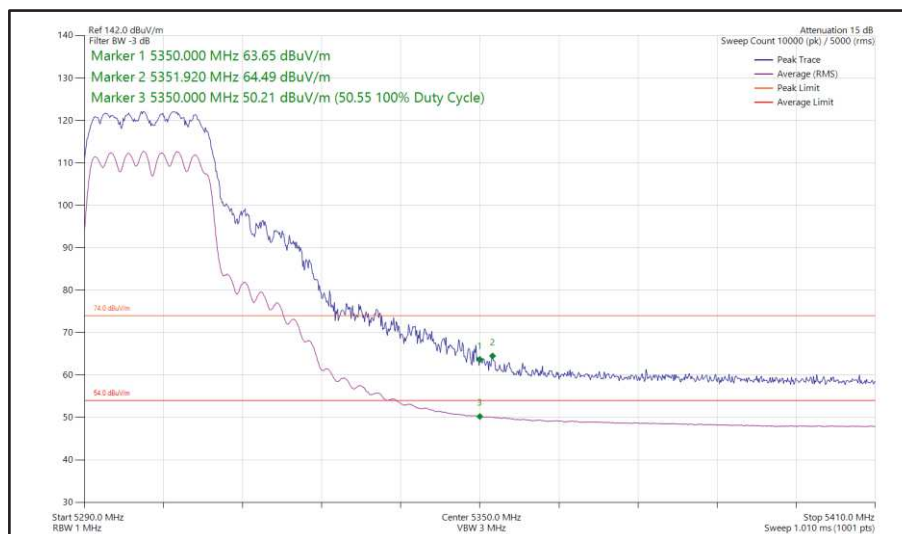


**Figure 48 - 802.11n HT20, CDD, Core 0 + Core 1 - 5300 MHz
Band Edge Frequency 5350 MHz**

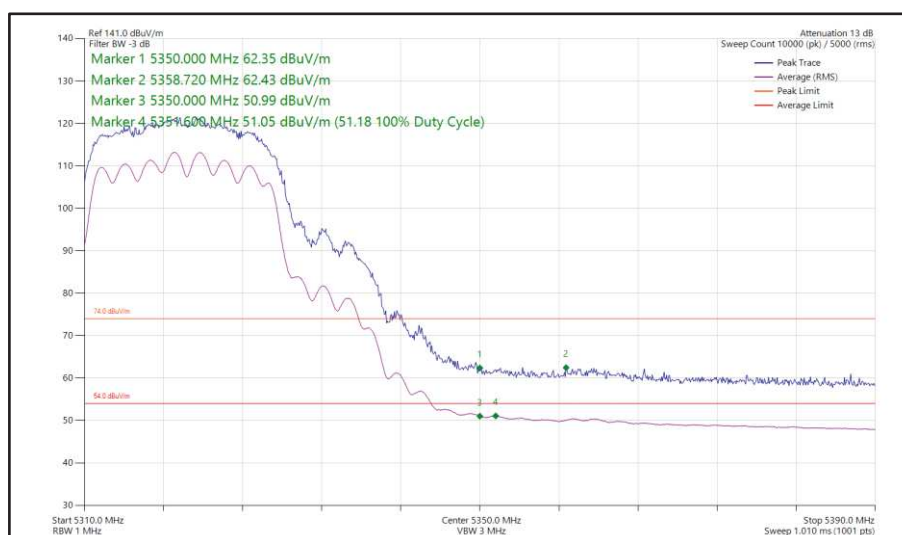


**Figure 49 - 802.11n HT20, CDD, Core 0 + Core 1 - 5320 MHz
Band Edge Frequency 5350 MHz**

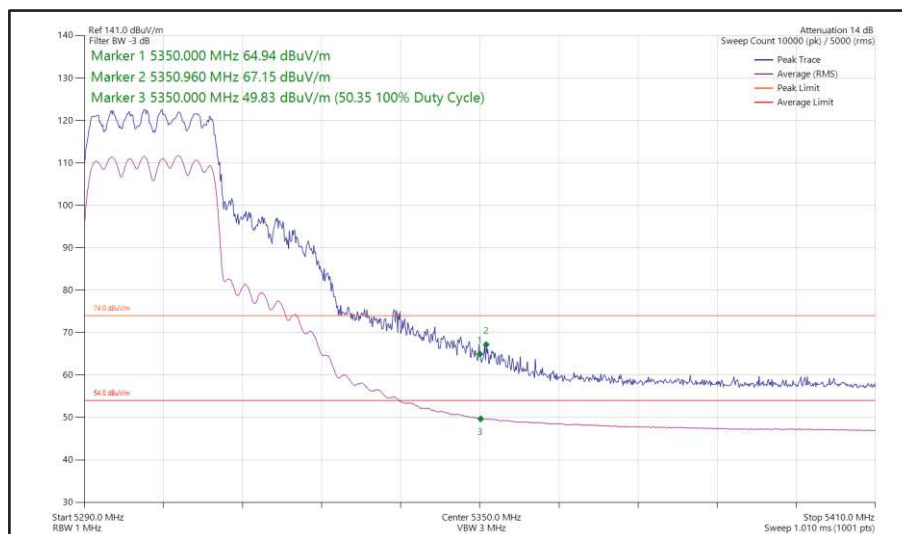


**Figure 50 - 802.11ax HE20, SU, CDD, Core 0 + Core 1 - 5300 MHz
Band Edge Frequency 5350 MHz**

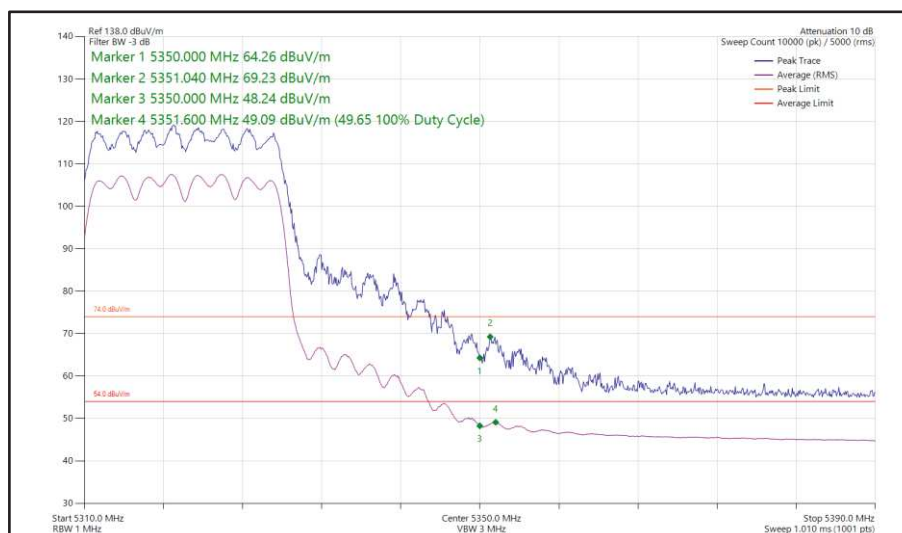


**Figure 51 - 802.11ax HE20, SU, CDD, Core 0 + Core 1 - 5320 MHz
Band Edge Frequency 5350 MHz**

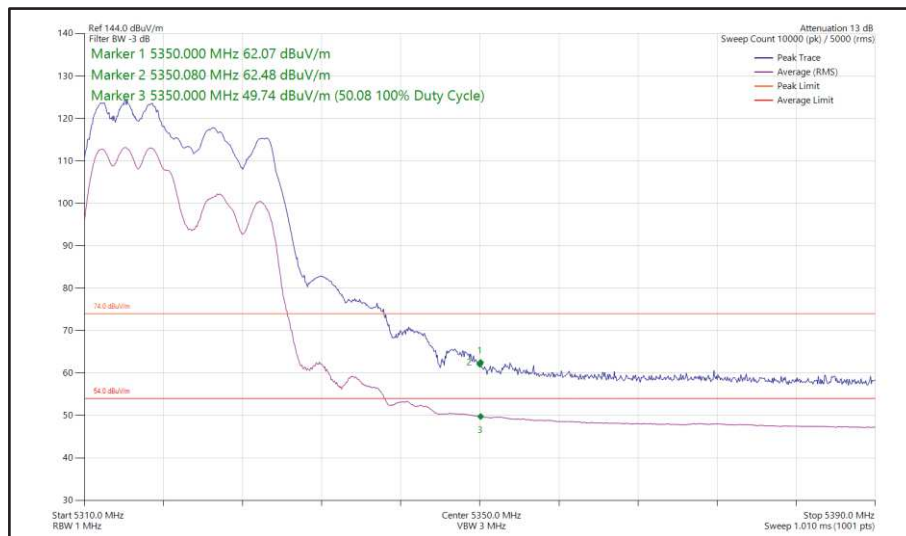


**Figure 52 - 802.11ax HE20, RU 106-53, CDD, Core 0 + Core 1 - 5320 MHz
Band Edge Frequency 5350 MHz**

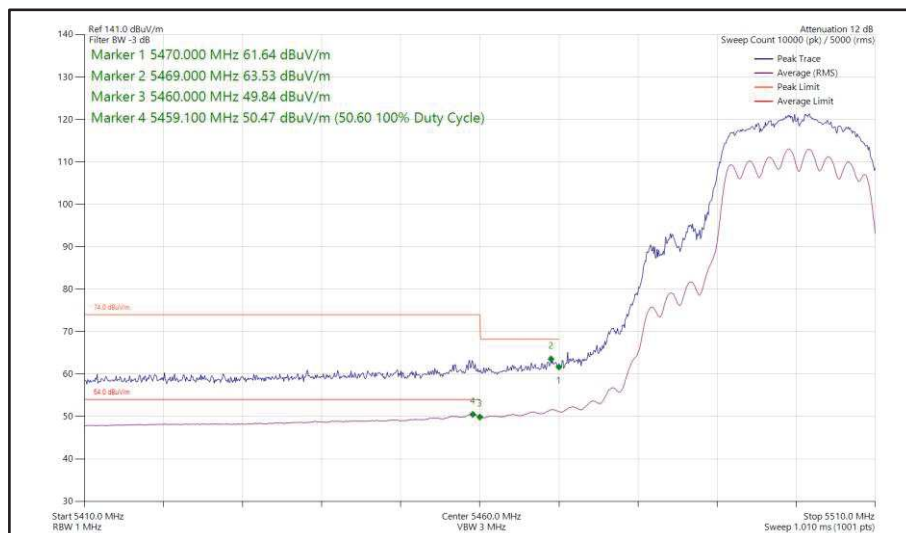


**Figure 53 - 802.11n HT20, CDD, Core 0 + Core 1 - 5500 MHz
Band Edge Frequency 5460 MHz**

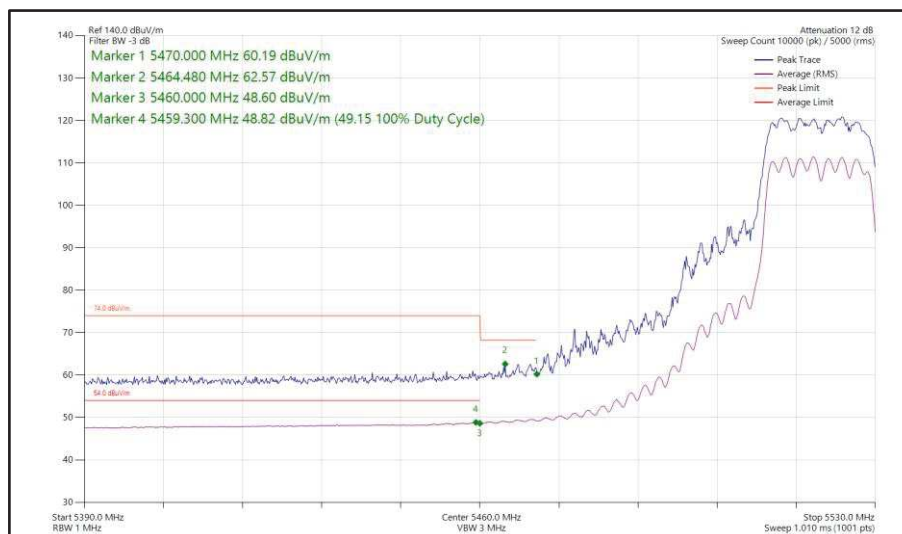


**Figure 54 - 802.11n HT20, CDD, Core 0 + Core 1 - 5520 MHz
Band Edge Frequency 5460 MHz**

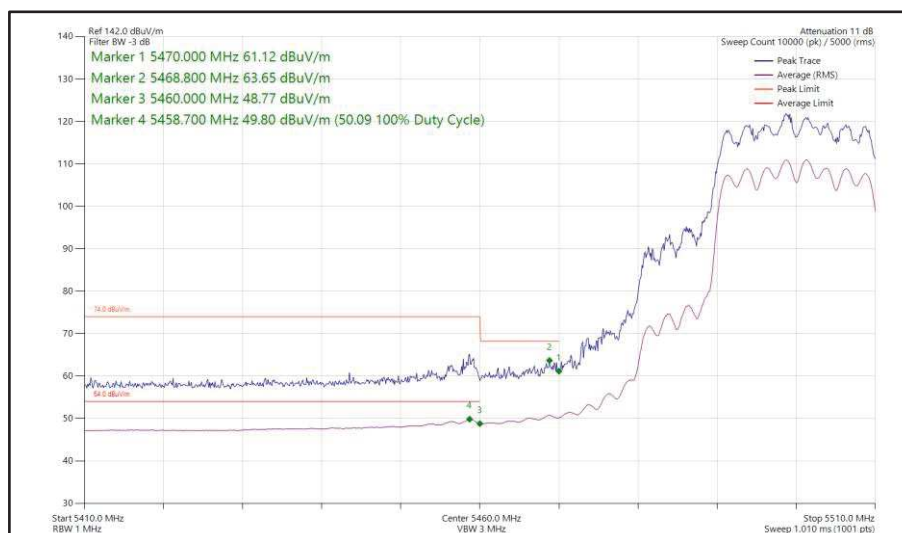

**Figure 55 - 802.11ax HE20, SU, CDD, Core 0 + Core 1 - 5500 MHz
Band Edge Frequency 5460 MHz**

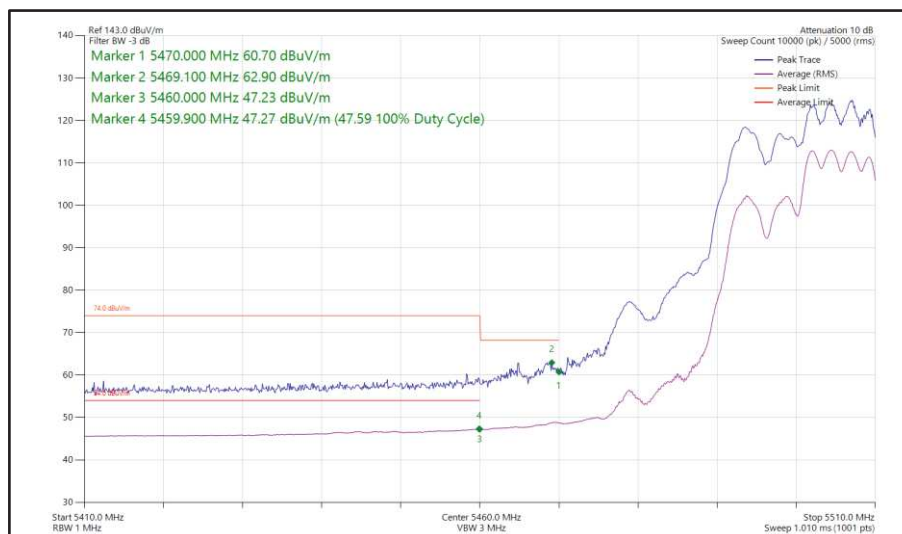

**Figure 56 - 802.11ax HE20, RU 106-54, CDD, Core 0 + Core 1 - 5500 MHz
Band Edge Frequency 5460 MHz**

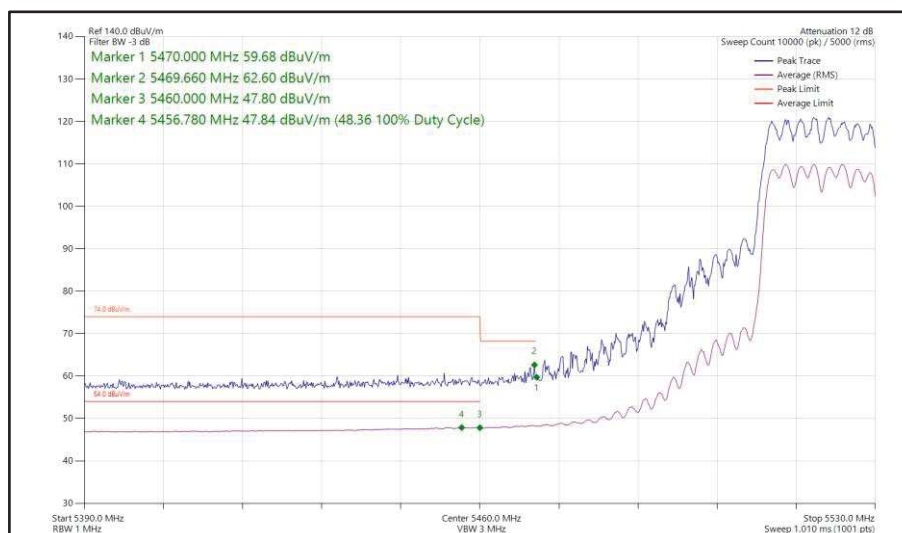

**Figure 57 - 802.11ax HE20, SU, CDD, Core 0 + Core 1 - 5520 MHz
Band Edge Frequency 5460 MHz**

20 MHz Bandwidth - Core 0 + Core 1 (SDM)

Mode	Data Rate/ MCS	Resource Size	Resource Index	TX Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dBμV/m)	Average Level (dBμV/m)
802.11n HT20	MCS12	-	-	5180	5150	65.47	51.17
802.11n HT20	MCS15	-	-	5200	5150	63.09	49.65
802.11ax HE20	MCS11x2	SU	-	5180	5150	69.49	51.31
802.11ax HE20	MCS11x2	106	53	5180	5150	63.55	49.83
802.11ax HE20	MCS11x2	SU	-	5200	5150	67.02	49.86
802.11n HT20	MCS15	-	-	5300	5350	63.77	50.28
802.11n HT20	MCS12	-	-	5320	5350	64.57	51.45
802.11ax HE20	MCS11x2	SU	-	5300	5350	66.87	51.13
802.11ax HE20	MCS4x2	SU	-	5320	5350	66.87	51.34
802.11ax HE20	MCS11x2	106	54	5320	5350	64.45	50.55
802.11n HT20	MCS10	-	-	5500	5460	63.36	50.09
802.11n HT20	MCS15	-	-	5520	5460	62.07	49.45
802.11ax HE20	MCS2x2	SU	-	5500	5460	63.53	50.60
802.11ax HE20	MCS11x2	106	53	5500	5460	62.72	48.51
802.11ax HE20	MCS11x2	SU	-	5520	5460	63.67	48.94

Table 9 - SDM Restricted Band Edge Results



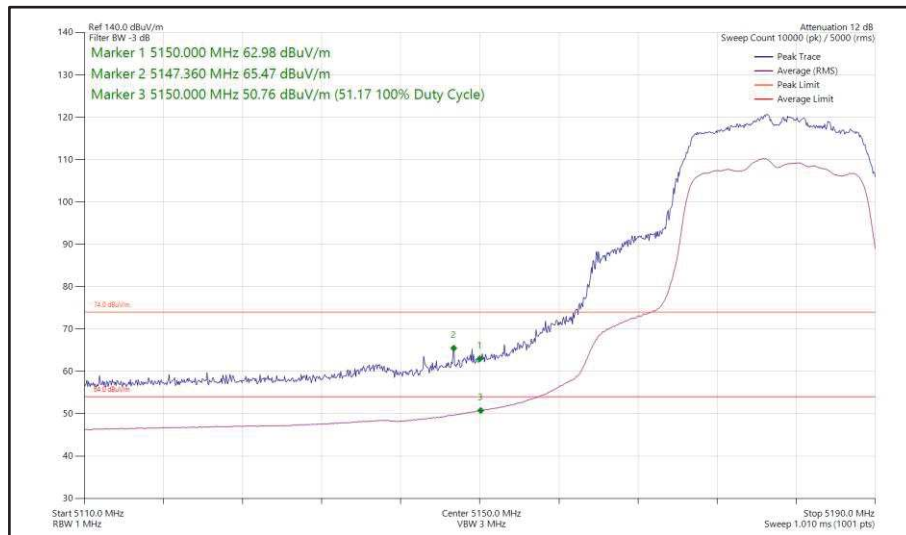



Figure 58 - 802.11n HT20, SDM, Core 0 + Core 1 - 5180 MHz
Band Edge Frequency 5150 MHz

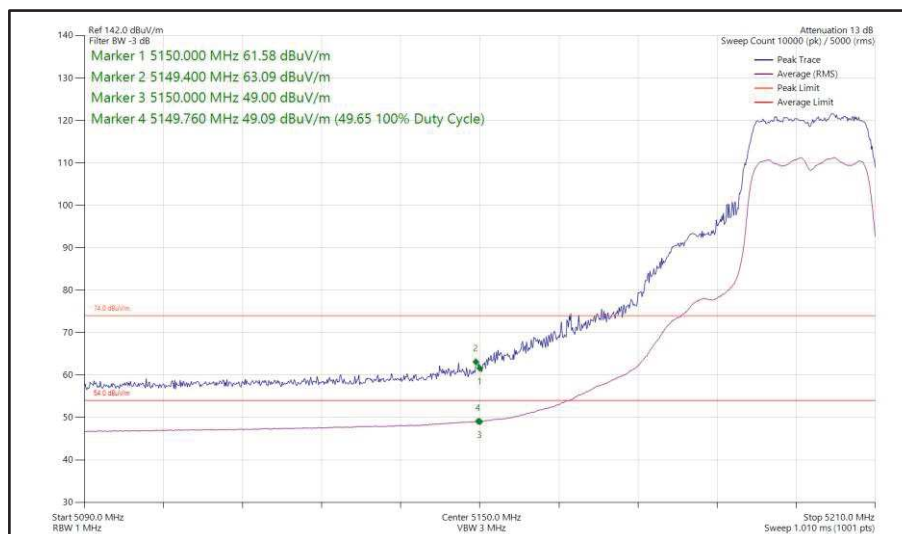


**Figure 59 - 802.11n HT20, SDM, Core 0 + Core 1 - 5200 MHz
Band Edge Frequency 5150 MHz**

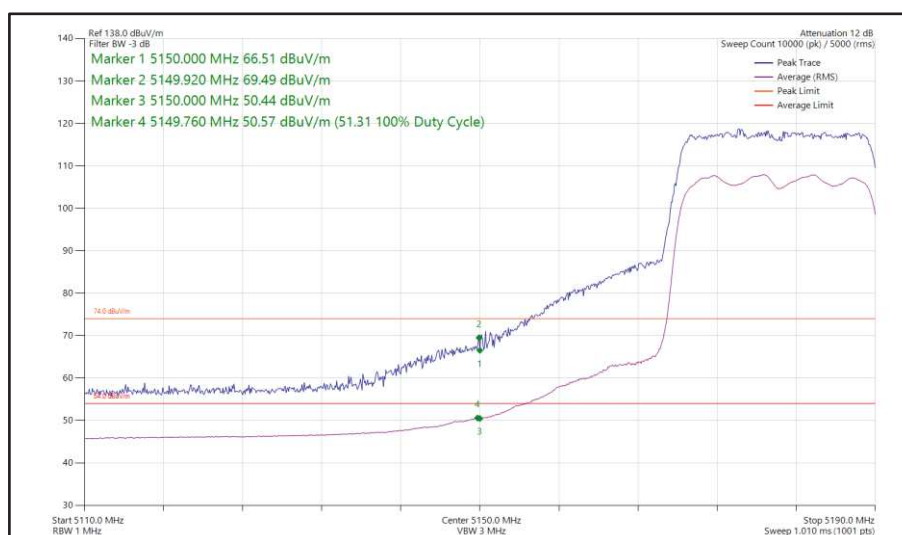


**Figure 60 - 802.11ax HE20, SU, SDM, Core 0 + Core 1 - 5180 MHz
Band Edge Frequency 5150 MHz**

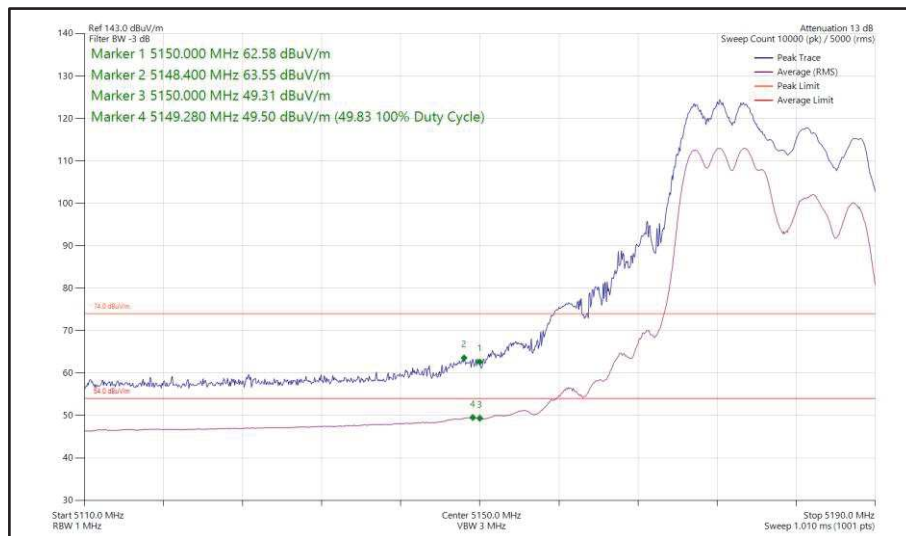


**Figure 61 - 802.11ax HE20, RU 106-53, SDM, Core 0 + Core 1 - 5180 MHz
Band Edge Frequency 5150 MHz**

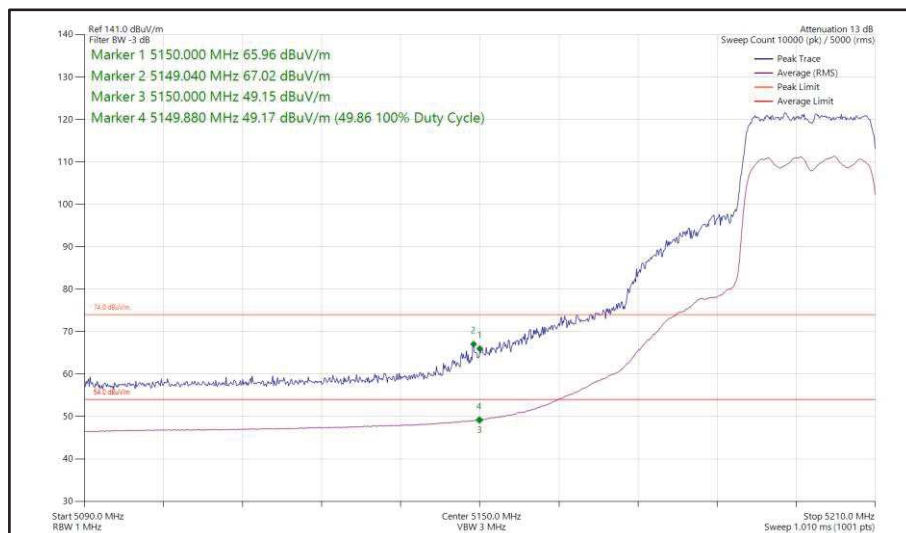


**Figure 62 - 802.11ax HE20, SU, SDM, Core 0 + Core 1 - 5200 MHz
Band Edge Frequency 5150 MHz**

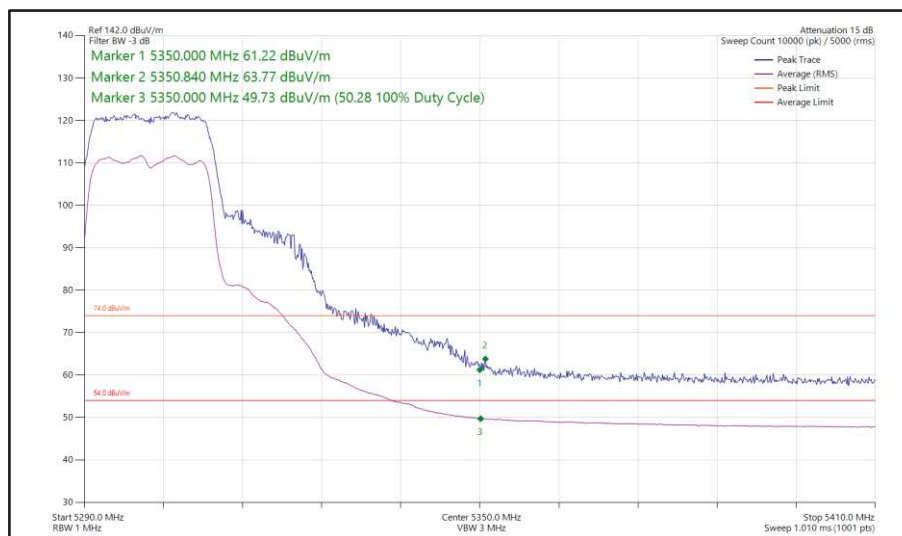


**Figure 63 - 802.11n HT20, SDM, Core 0 + Core 1 - 5300 MHz
Band Edge Frequency 5350 MHz**

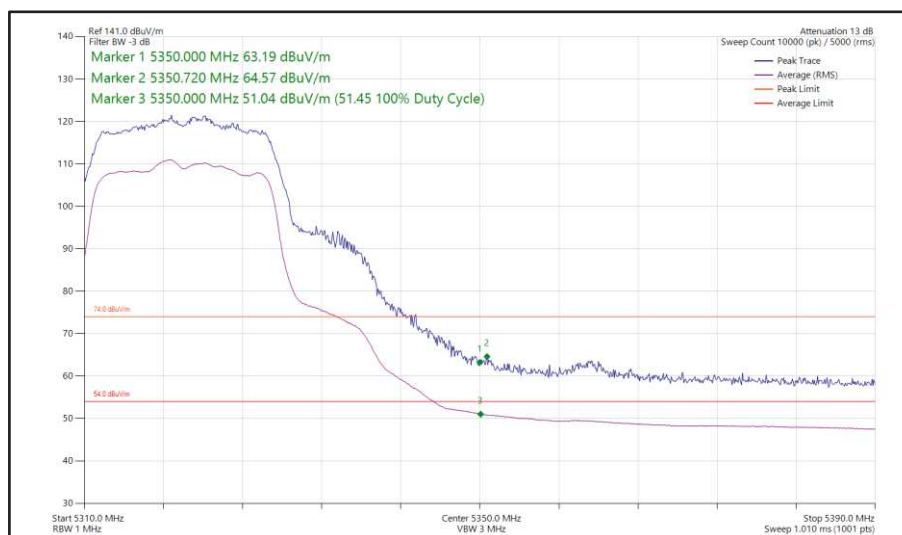


**Figure 64 - 802.11n HT20, SDM, Core 0 + Core 1 - 5320 MHz
Band Edge Frequency 5350 MHz**

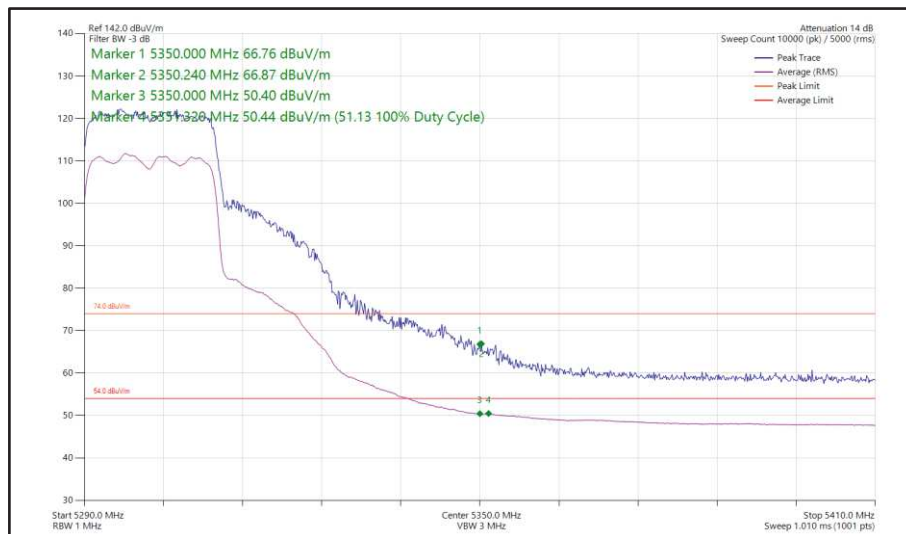


**Figure 65 - 802.11ax HE20, SU, SDM, Core 0 + Core 1 - 5300 MHz
Band Edge Frequency 5350 MHz**

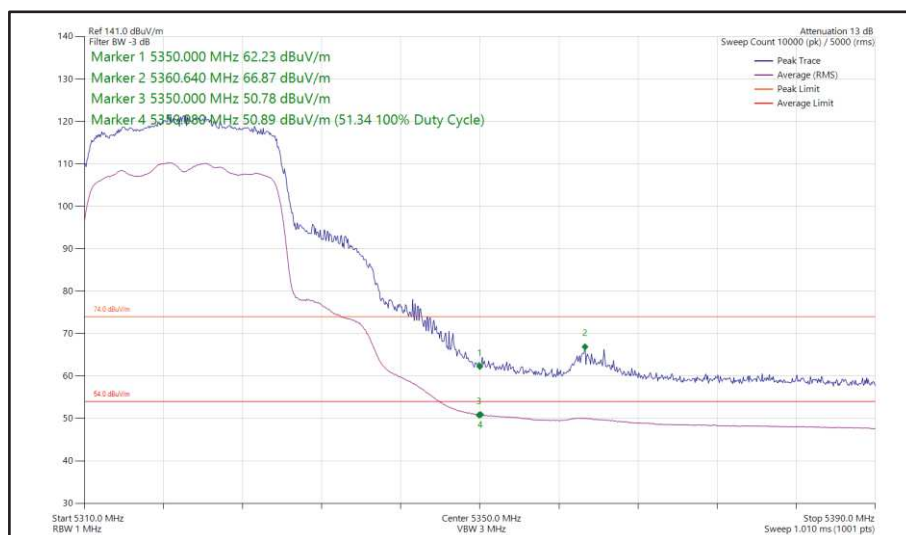


**Figure 66 - 802.11ax HE20, SU, SDM, Core 0 + Core 1 - 5320 MHz
Band Edge Frequency 5350 MHz**

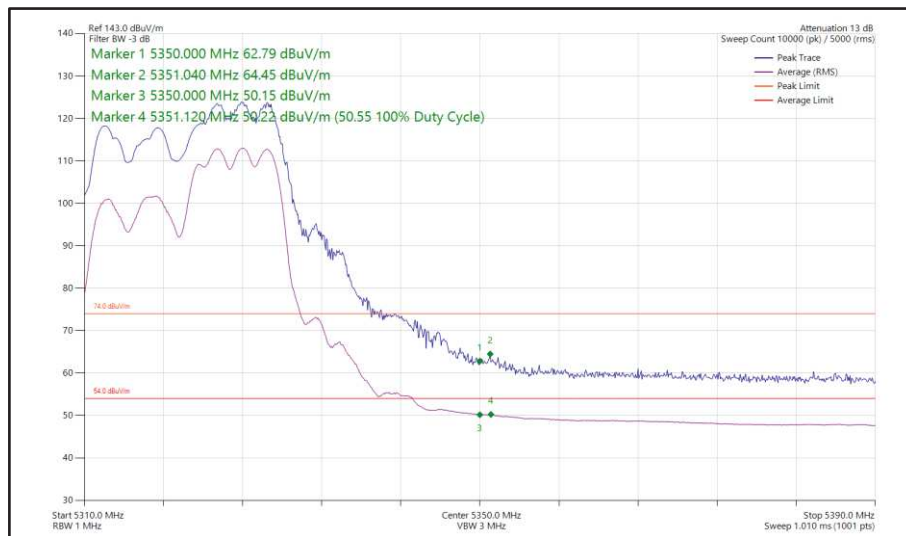


**Figure 67 - 802.11ax HE20, RU 106-54, SDM, Core 0 + Core 1 - 5320 MHz
Band Edge Frequency 5350 MHz**

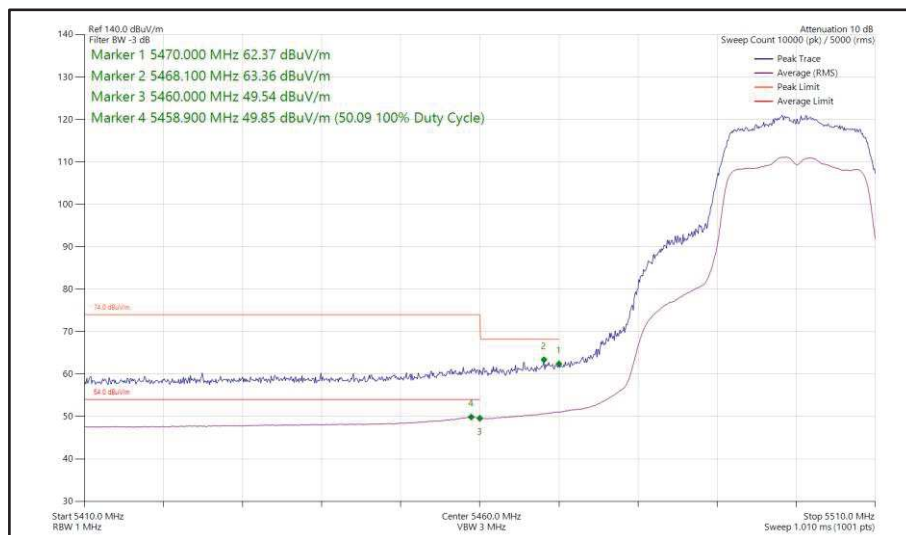


**Figure 68 - 802.11n HT20, SDM, Core 0 + Core 1 - 5500 MHz
Band Edge Frequency 5460 MHz**

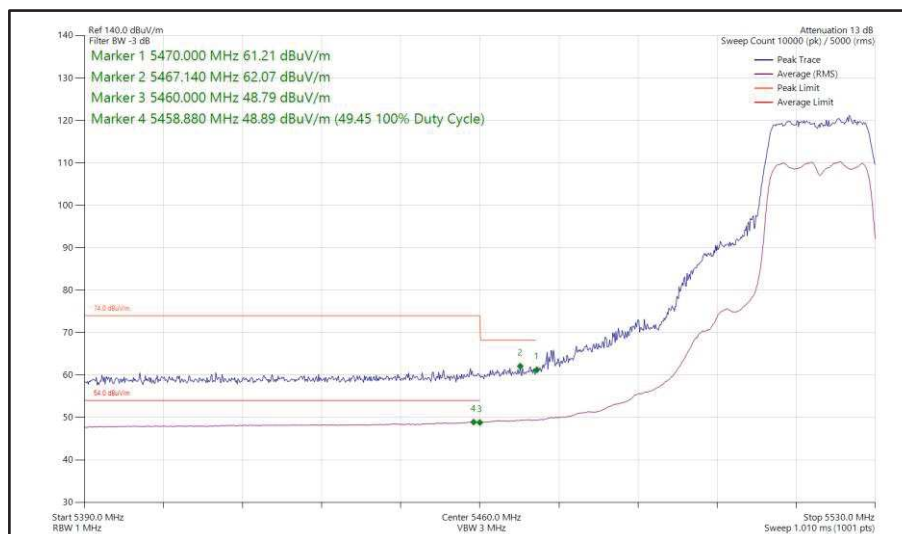


**Figure 69 - 802.11n HT20, SDM, Core 0 + Core 1 - 5520 MHz
Band Edge Frequency 5460 MHz**

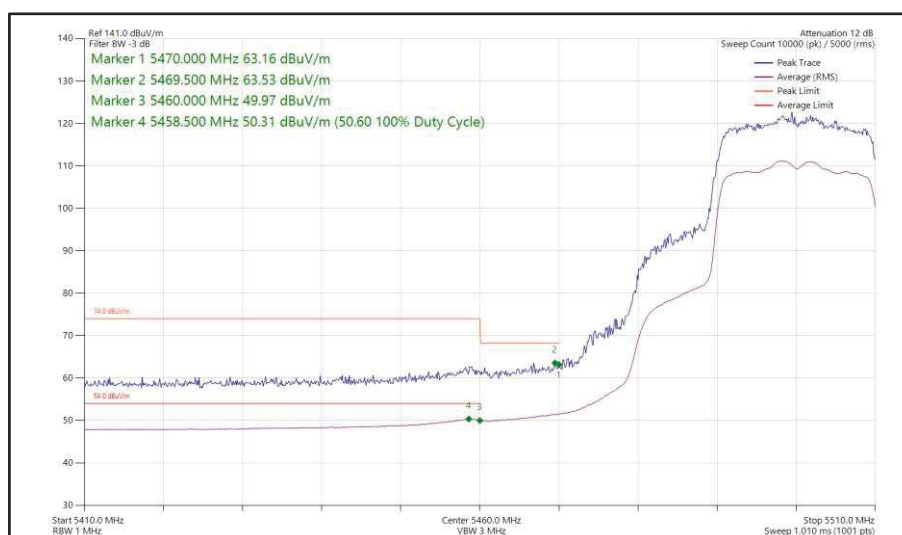

**Figure 70 - 802.11ax HE20, SU, SDM, Core 0 + Core 1 - 5500 MHz
Band Edge Frequency 5460 MHz**

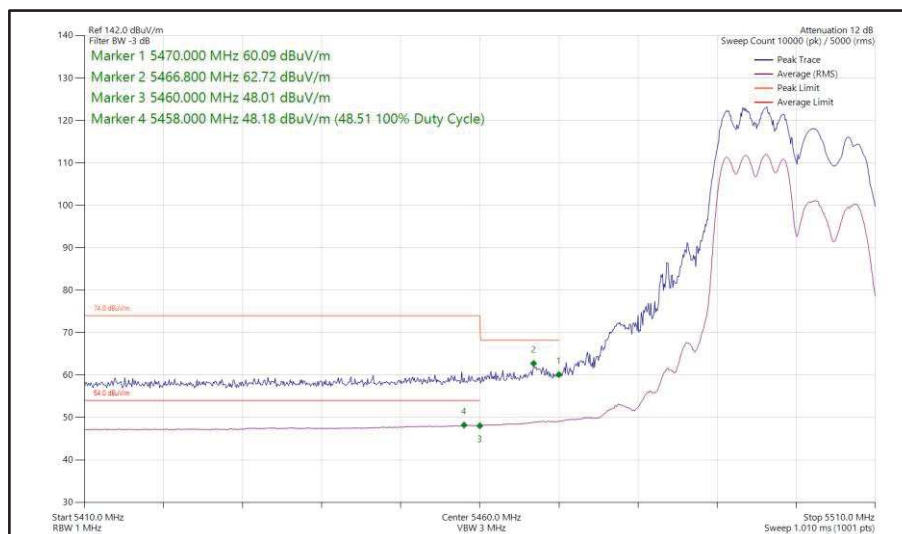

**Figure 71 - 802.11ax HE20, RU 106-53, SDM, Core 0 + Core 1 - 5500 MHz
Band Edge Frequency 5460 MHz**

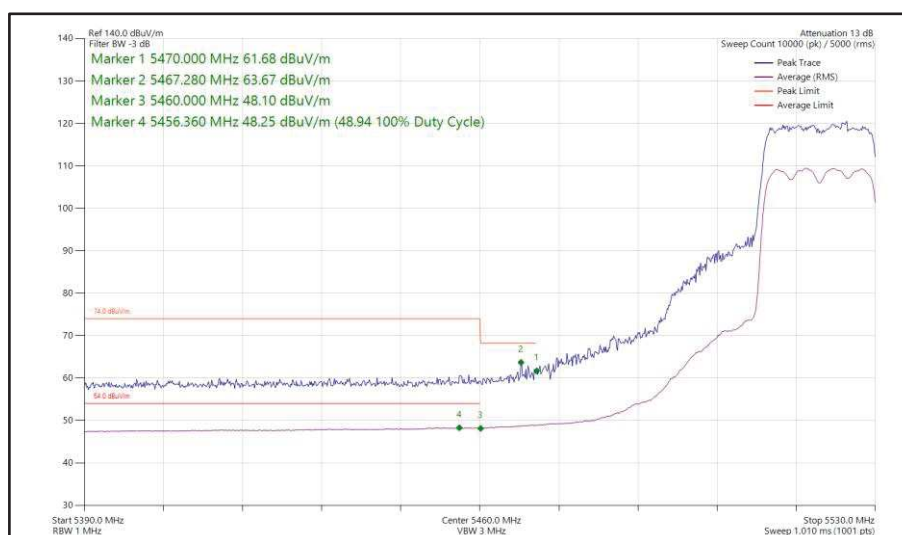

**Figure 72 - 802.11ax HE20, SU, SDM, Core 0 + Core 1 - 5520 MHz
Band Edge Frequency 5460 MHz**

20 MHz Bandwidth - Core 0 + Core 1 (TxBF)

Mode	Data Rate/ MCS	Resource Size	Resource Index	TX Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dBμV/m)	Average Level (dBμV/m)
802.11ac VHT20	MCS7x1	-	-	5180	5150	69.29	51.25
802.11ac VHT20	MCS4x1	-	-	5200	5150	61.37	49.45
802.11ac VHT20	MCS7x1	-	-	5300	5350	64.56	50.28
802.11ac VHT20	MCS7x1	-	-	5320	5350	68.81	51.49
802.11ac VHT20	MCS2x1	-	-	5500	5460	63.59	49.21
802.11ac VHT20	MCS2x1	-	-	5520	5460	60.44	48.76

Table 10 - TxBF Restricted Band Edge Results

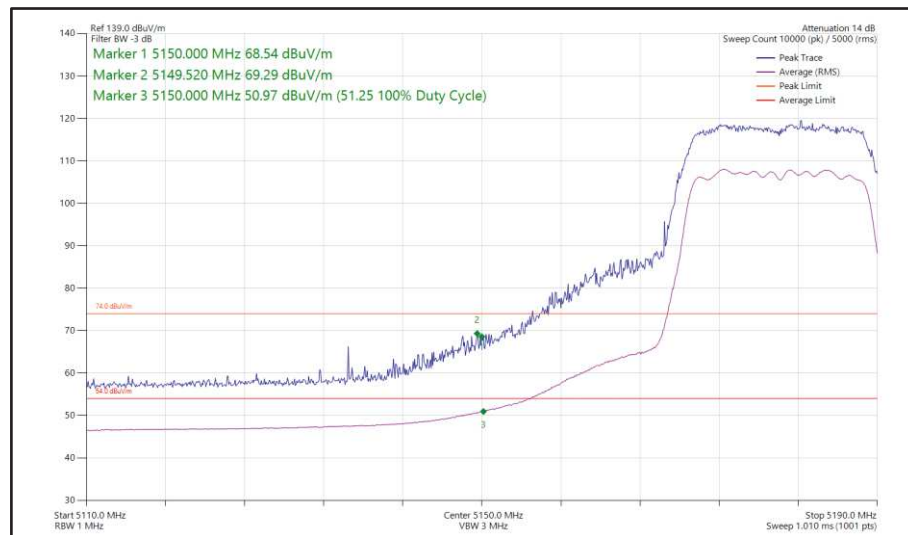


Figure 73 - 802.11ac VHT20, TxBF, Core 0 + Core 1 - 5180 MHz
Band Edge Frequency 5150 MHz



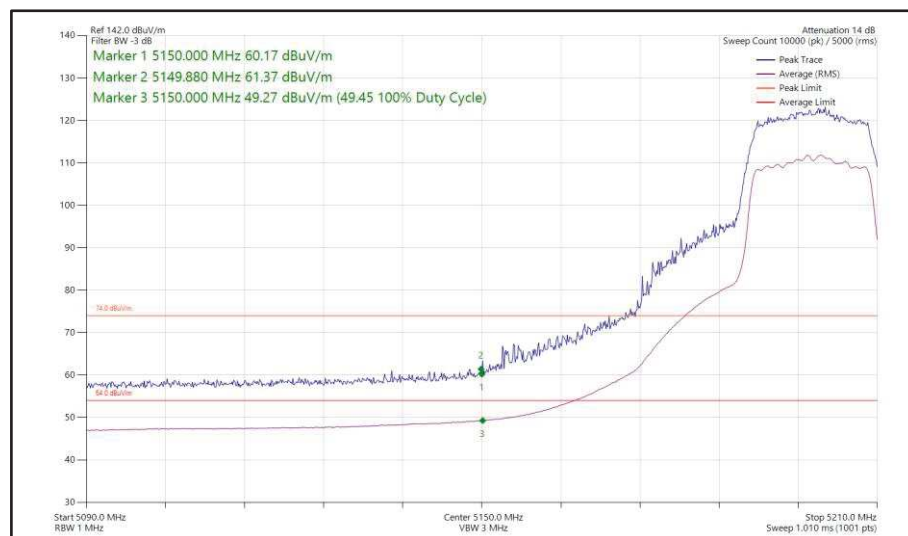



Figure 74 - 802.11ac VHT20, TxBF, Core 0 + Core 1 - 5200 MHz
Band Edge Frequency 5150 MHz

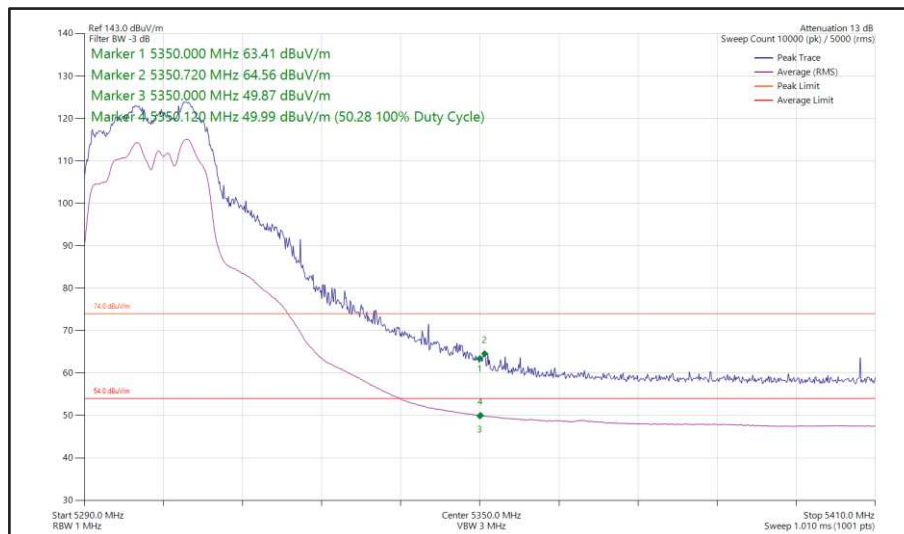


**Figure 75 - 802.11ac VHT20, TxBF, Core 0 + Core 1 - 5300 MHz
Band Edge Frequency 5350 MHz**

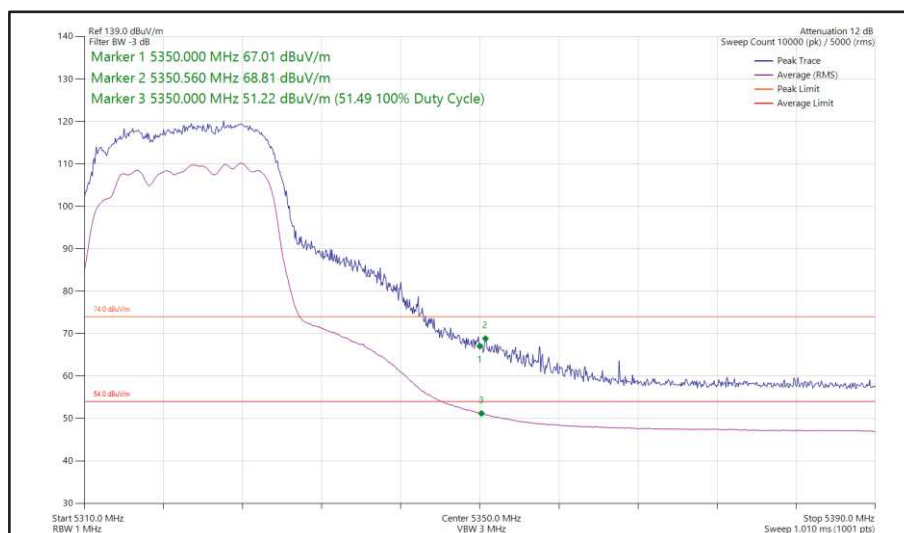

**Figure 76 - 802.11ac VHT20, TxBF, Core 0 + Core 1 - 5320 MHz
Band Edge Frequency 5350 MHz**

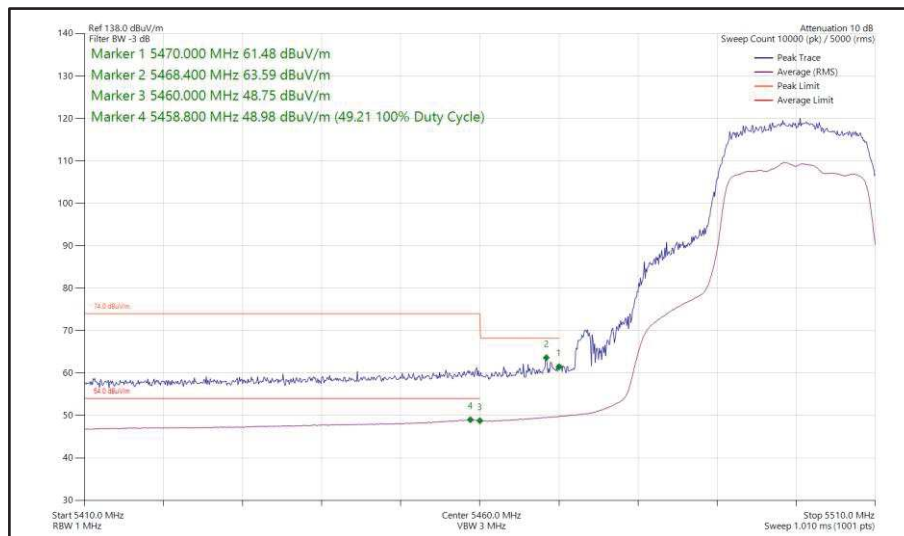

**Figure 77 - 802.11ac VHT20, TxBF, Core 0 + Core 1 - 5500 MHz
Band Edge Frequency 5460 MHz**

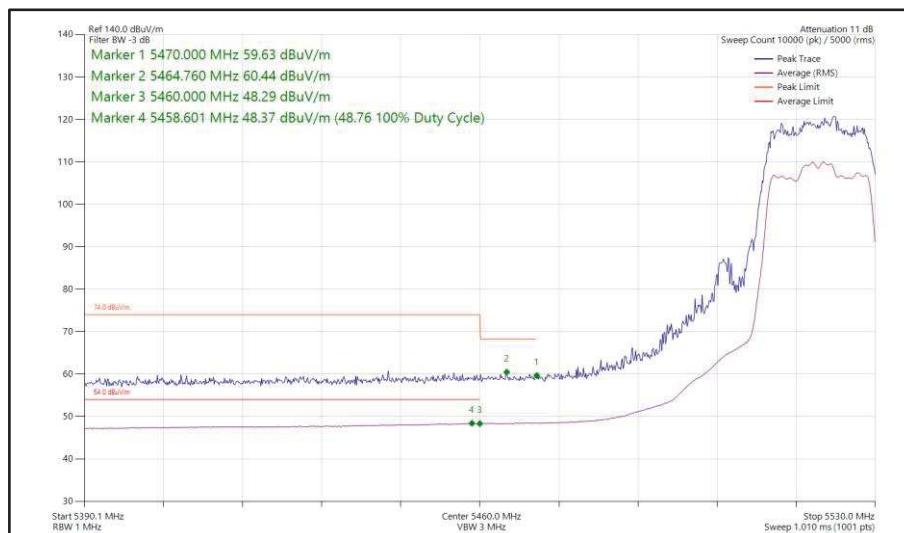


**Figure 78 - 802.11ac VHT20, TxBF, Core 0 + Core 1 - 5520 MHz
Band Edge Frequency 5460 MHz**




40 MHz Bandwidth - Core 0 (SISO)

Mode	Data Rate/ MCS	Resource Size	Resource Index	TX Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dBμV/m)	Average Level (dBμV/m)
802.11n HT40	MCS7	-	-	5190	5150	68.91	48.71
802.11n HT40	MCS7	-	-	5230	5150	65.18	48.57
802.11ax HE40	MCS11x1	SU	-	5190	5150	69.43	50.51
802.11ax HE40	MCS11x1	106	53	5190	5150	66.43	46.36
802.11ax HE40	MCS11x1	SU	-	5230	5150	66.40	49.85
802.11n HT40	MCS7	-	-	5270	5350	66.94	51.28
802.11n HT40	MCS4	-	-	5310	5350	64.00	51.23
802.11ax HE40	MCS4x1	SU	-	5270	5350	66.85	51.27
802.11ax HE40	MCS11x1	106	56	5270	5350	57.85	46.76
802.11ax HE40	MCS11x1	SU	-	5310	5350	67.06	51.45
802.11ax HE40	MCS11x1	52	37	5310	5350	69.44	49.58
802.11n HT40	MCS2	-	-	5510	5460	63.70	47.99
802.11n HT40	MCS7	-	-	5550	5460	62.11	47.06
802.11ax HE40	MCS11x1	SU	-	5510	5460	63.68	46.46
802.11ax HE40	MCS11x1	106	53	5510	5460	63.46	46.83
802.11ax HE40	MCS4x1	SU	-	5550	5460	63.49	48.00


Table 11 - SISO Restricted Band Edge Results

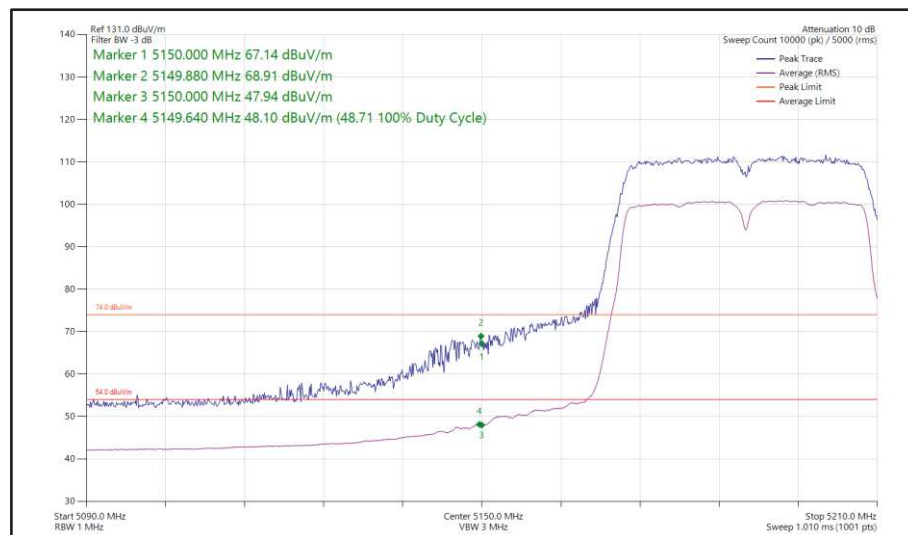


**Figure 79 - 802.11n HT40, SISO, Core 0 - 5190 MHz
Band Edge Frequency 5150 MHz**

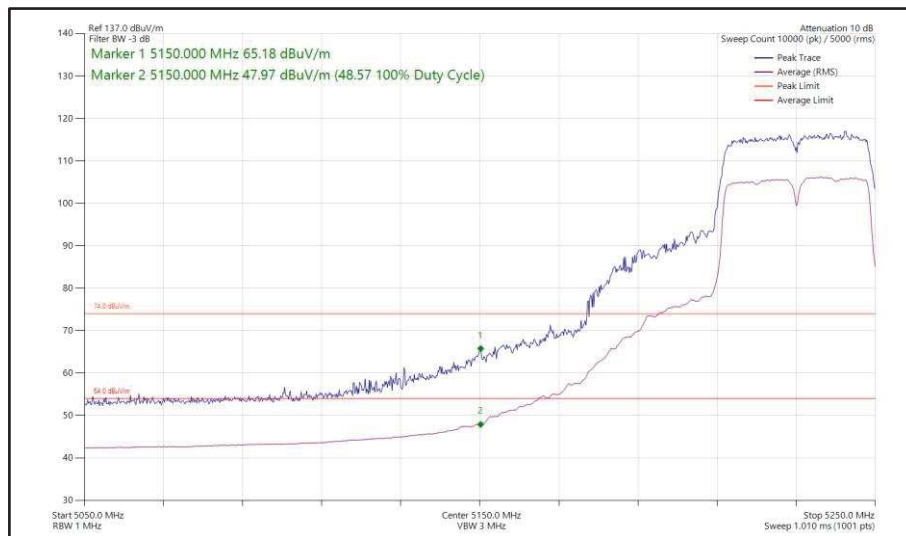


**Figure 80 - 802.11n HT40, SISO, Core 0 - 5230 MHz
Band Edge Frequency 5150 MHz**

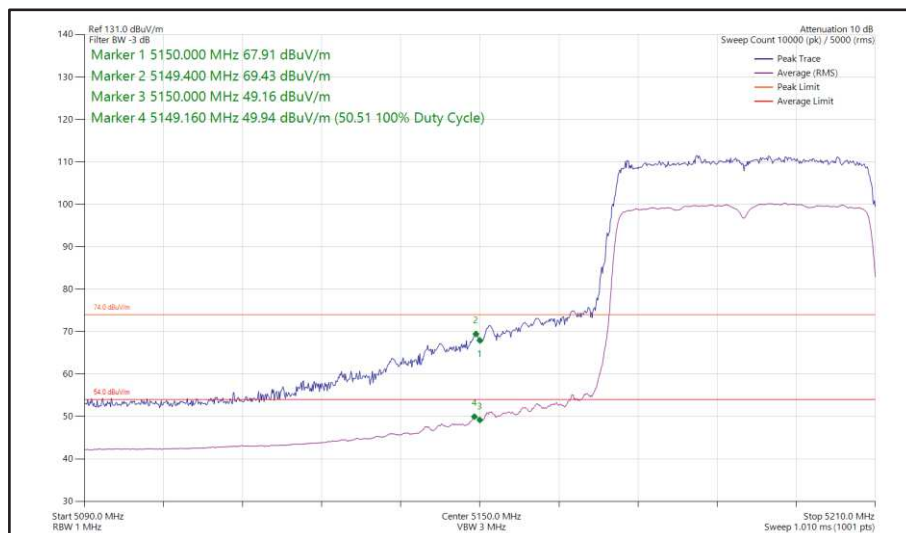


**Figure 81 - 802.11ax HE40, SU, SISO, Core 0 - 5190 MHz
Band Edge Frequency 5150 MHz**

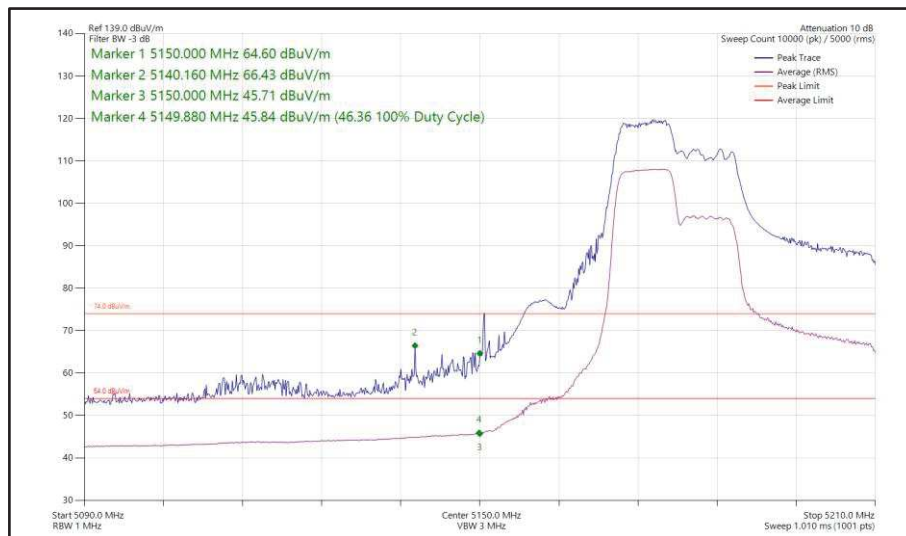


**Figure 82 - 802.11ax HE40, RU 106-53, SISO, Core 0 - 5190 MHz
Band Edge Frequency 5150 MHz**

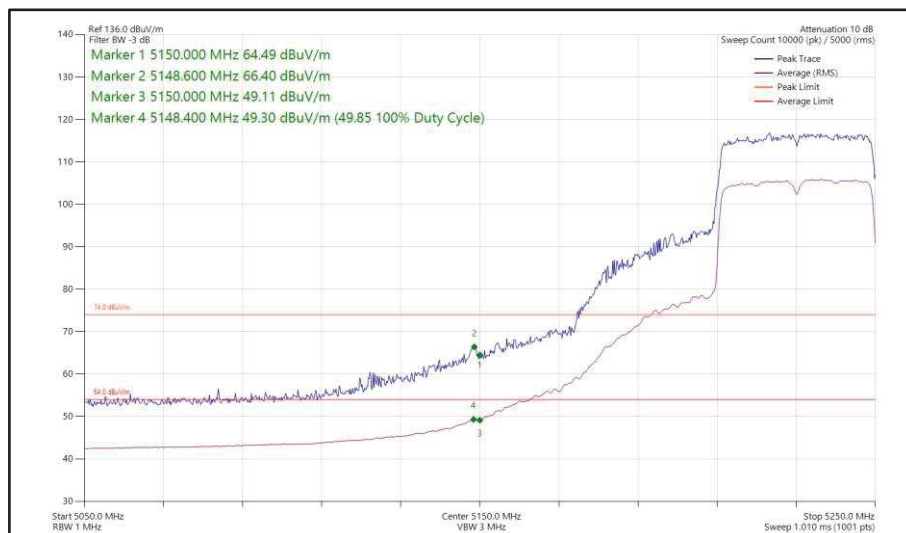


**Figure 83 - 802.11ax HE40, SU, SISO, Core 0 - 5230 MHz
Band Edge Frequency 5150 MHz**

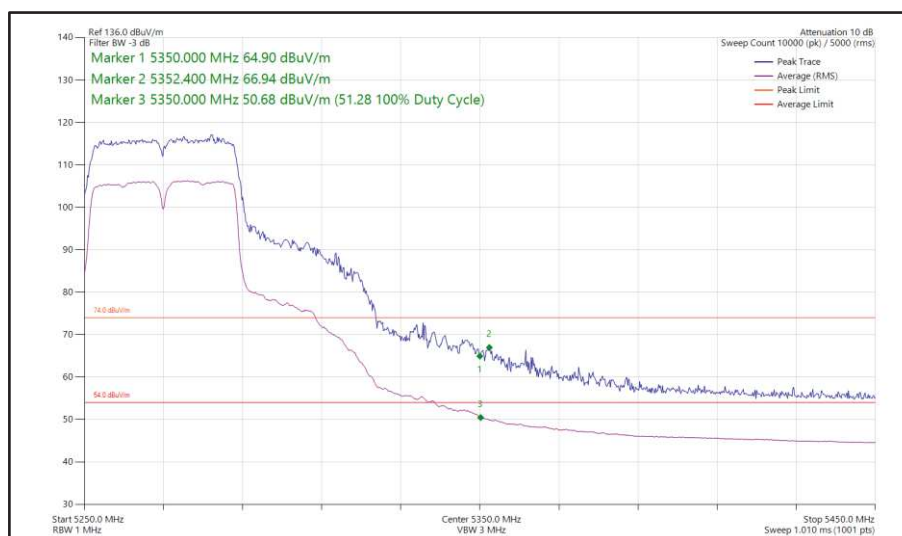


**Figure 84 - 802.11n HT40, SISO, Core 0 - 5270 MHz
Band Edge Frequency 5350 MHz**

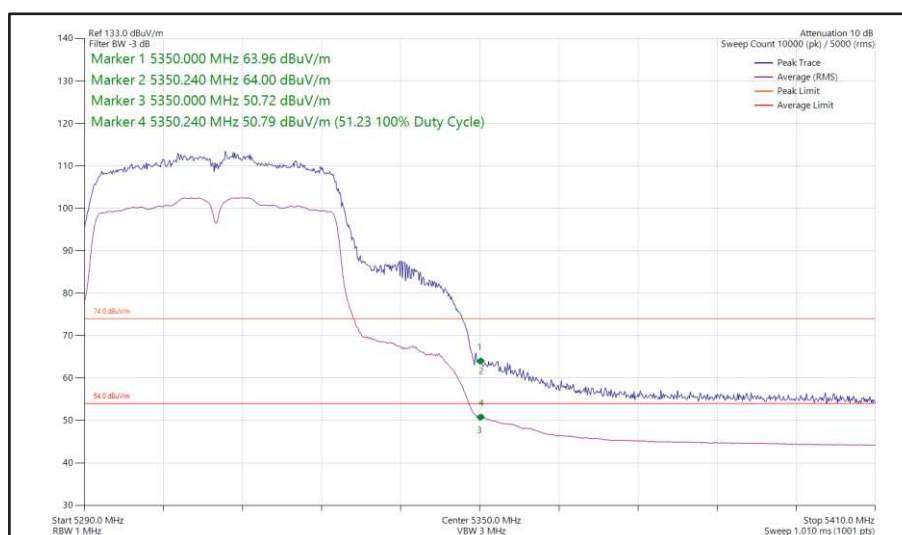


**Figure 85 - 802.11n HT40, SISO, Core 0 - 5310 MHz
Band Edge Frequency 5350 MHz**

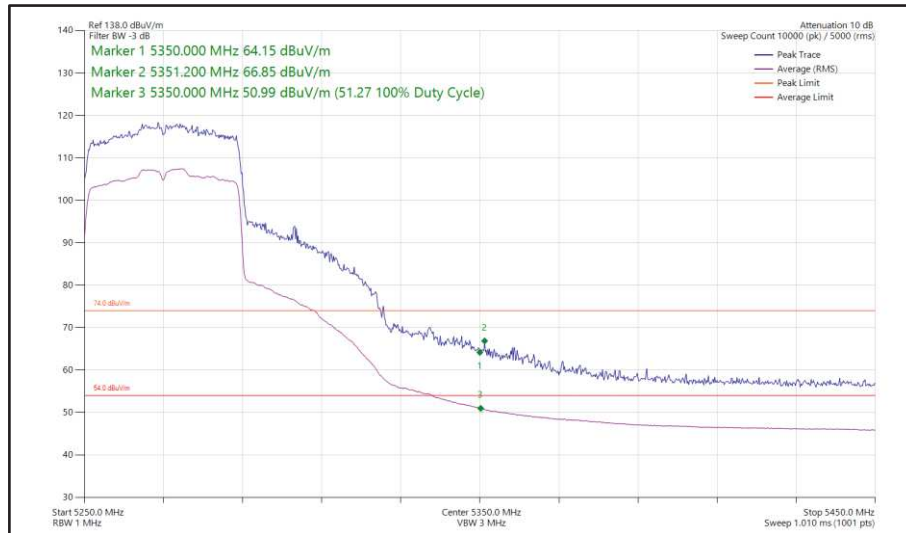


**Figure 86 - 802.11ax HE40, SU, SISO, Core 0 - 5270 MHz
Band Edge Frequency 5350 MHz**

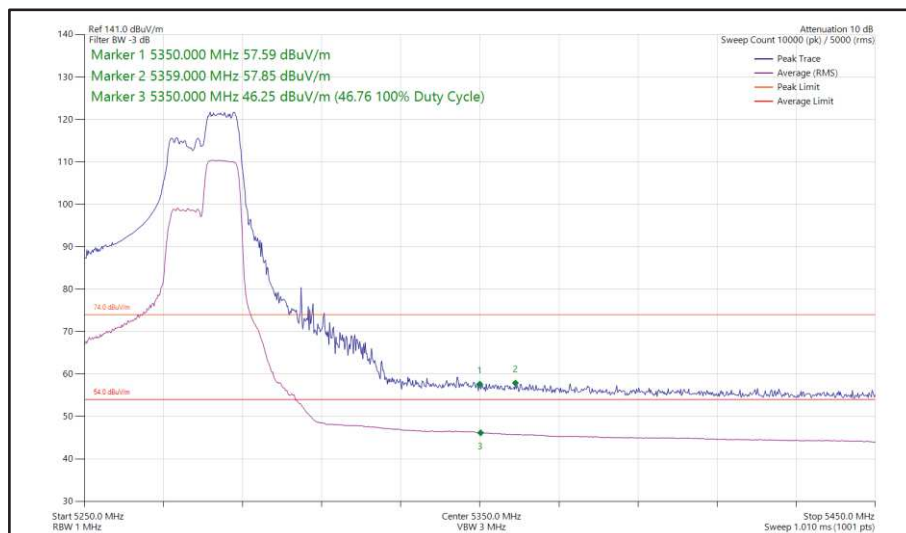


**Figure 87 - 802.11ax HE40, RU 106-56, SISO, Core 0 - 5270 MHz
Band Edge Frequency 5350 MHz**

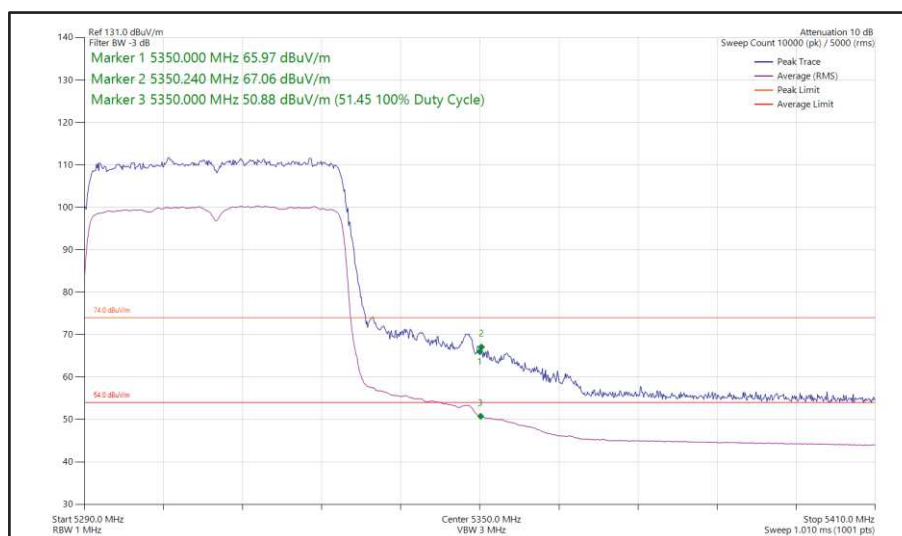


**Figure 88 - 802.11ax HE40, SU, SISO, Core 0 - 5310 MHz
Band Edge Frequency 5350 MHz**

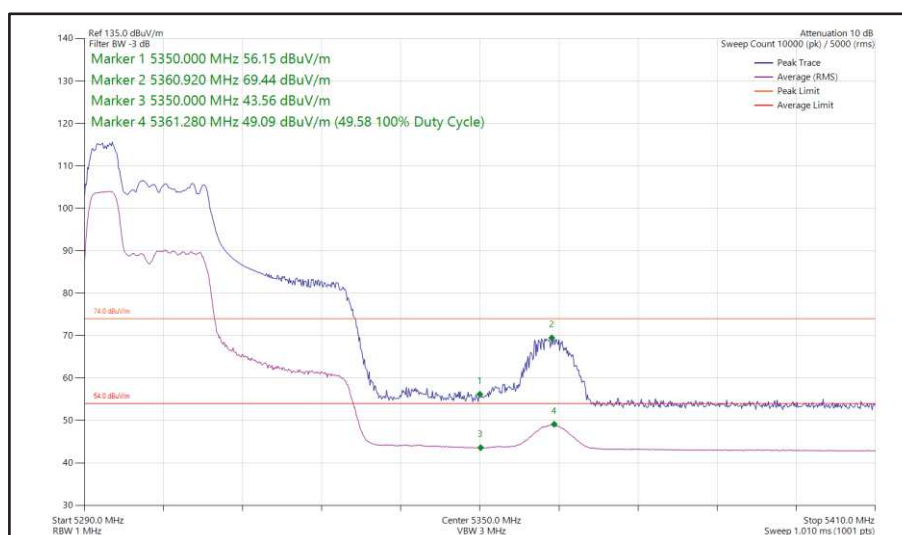


**Figure 89 - 802.11ax HE40, RU 52-37, SISO, Core 0 - 5310 MHz
Band Edge Frequency 5350 MHz**

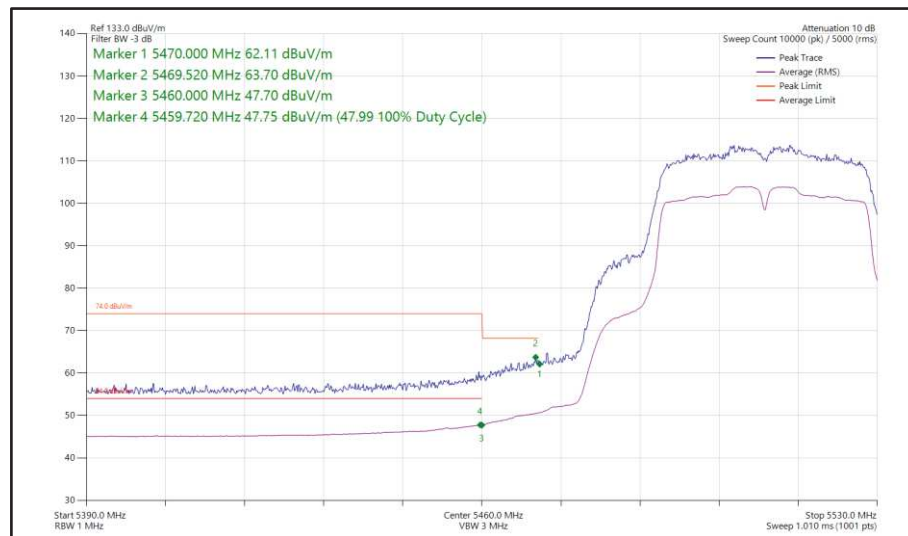


**Figure 90 - 802.11n HT40, SISO, Core 0 - 5510 MHz
Band Edge Frequency 5460 MHz**

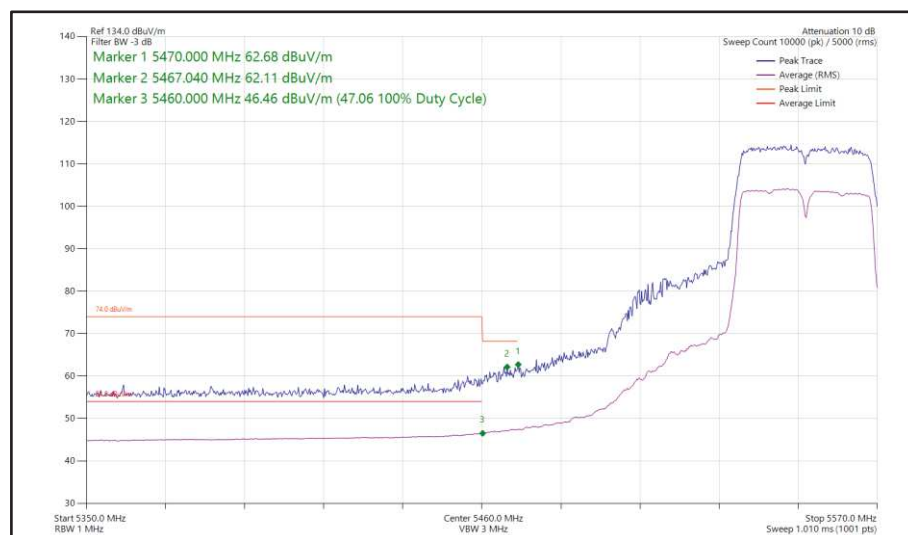

**Figure 91 - 802.11n HT40, SISO, Core 0 - 5550 MHz
Band Edge Frequency 5460 MHz**

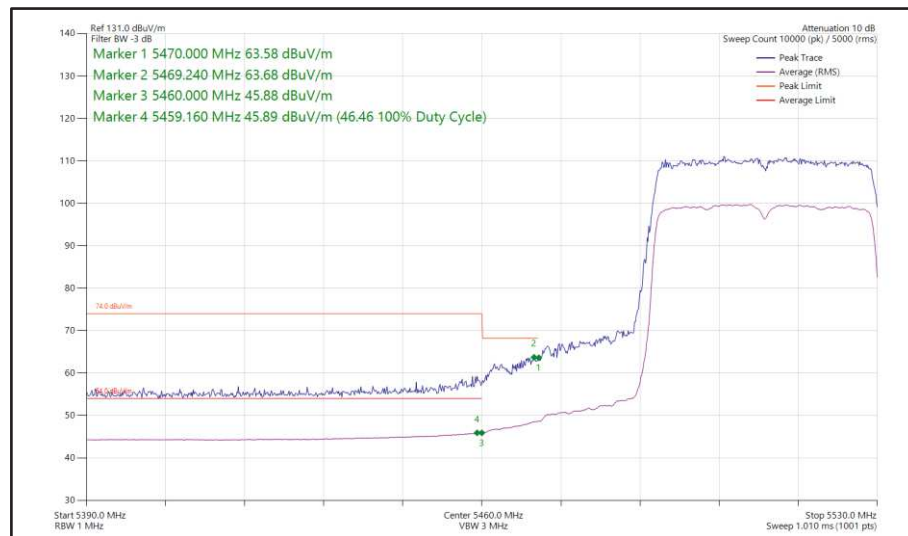

**Figure 92 - 802.11ax HE40, SU, SISO, Core 0 - 5510 MHz
Band Edge Frequency 5460 MHz**

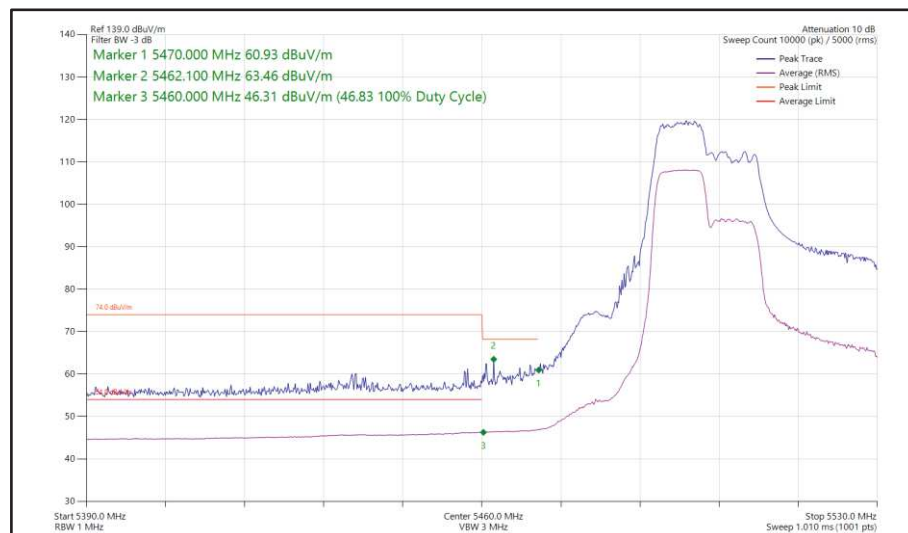

**Figure 93 - 802.11ax HE40, RU 106-53, SISO, Core 0 - 5510 MHz
Band Edge Frequency 5460 MHz**

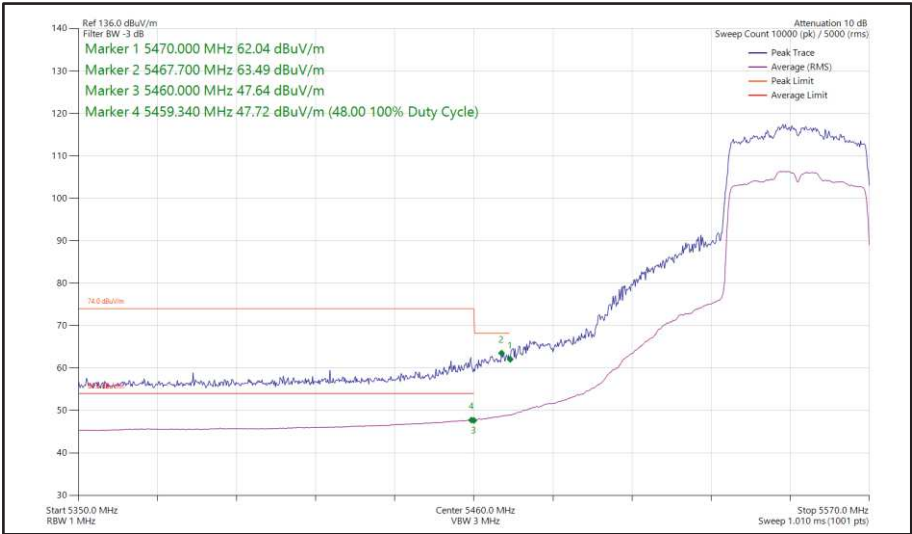



Figure 94 - 802.11ax HE40, SU, SISO, Core 0 - 5550 MHz
Band Edge Frequency 5460 MHz




40 MHz Bandwidth - Core 1 (SISO)

Mode	Data Rate/ MCS	Resource Size	Resource Index	TX Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dBμV/m)	Average Level (dBμV/m)
802.11n HT40	MCS2	-	-	5190	5150	64.27	51.13
802.11n HT40	MCS7	-	-	5230	5150	63.44	47.71
802.11ax HE40	MCS2x1	SU	-	5190	5150	64.30	51.20
802.11ax HE40	MCS11x1	106	53	5190	5150	68.61	46.54
802.11ax HE40	MCS11x1	SU	-	5230	5150	64.83	48.63
802.11n HT40	MCS7	-	-	5270	5350	64.16	48.26
802.11n HT40	MCS7	-	-	5310	5350	69.50	50.57
802.11ax HE40	MCS11x1	SU	-	5270	5350	67.26	50.42
802.11ax HE40	MCS11x1	106	56	5270	5350	57.14	45.35
802.11ax HE40	MCS2x1	SU	-	5310	5350	64.05	51.48
802.11ax HE40	MCS11x1	52	37	5310	5350	69.35	49.25
802.11n HT40	MCS2	-	-	5510	5460	63.55	47.27
802.11n HT40	MCS7	-	-	5550	5460	62.23	46.23
802.11ax HE40	MCS2x1	SU	-	5510	5460	63.32	48.04
802.11ax HE40	MCS11x1	106	53	5510	5460	61.04	45.67
802.11ax HE40	MCS11x1	SU	-	5550	5460	63.34	45.97


Table 12 - SISO Restricted Band Edge Results

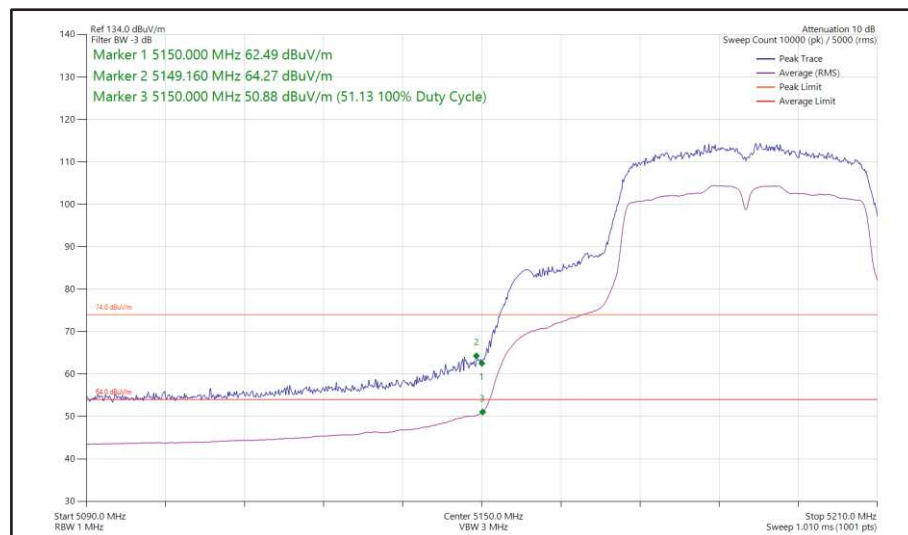


**Figure 95 - 802.11n HT40, SISO, Core 1 - 5190 MHz
Band Edge Frequency 5150 MHz**

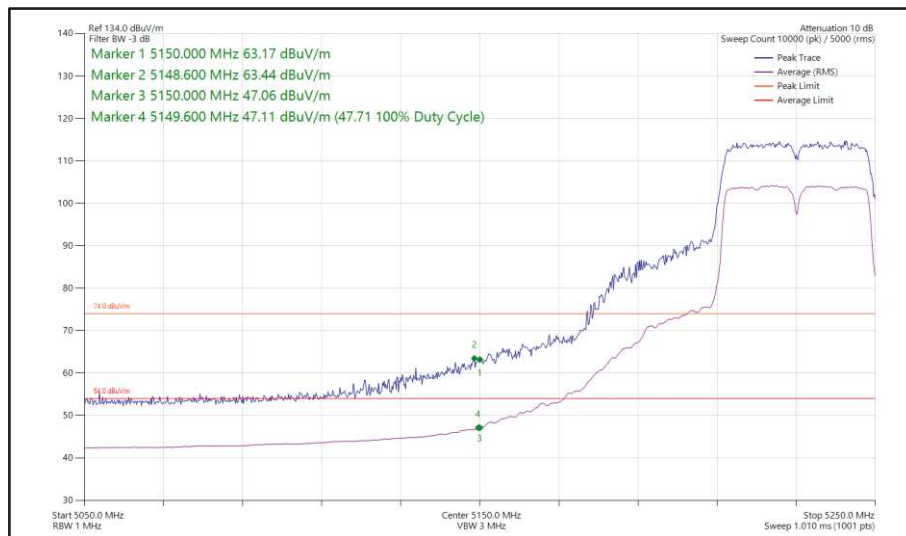


**Figure 96 - 802.11n HT40, SISO, Core 1 - 5230 MHz
Band Edge Frequency 5150 MHz**

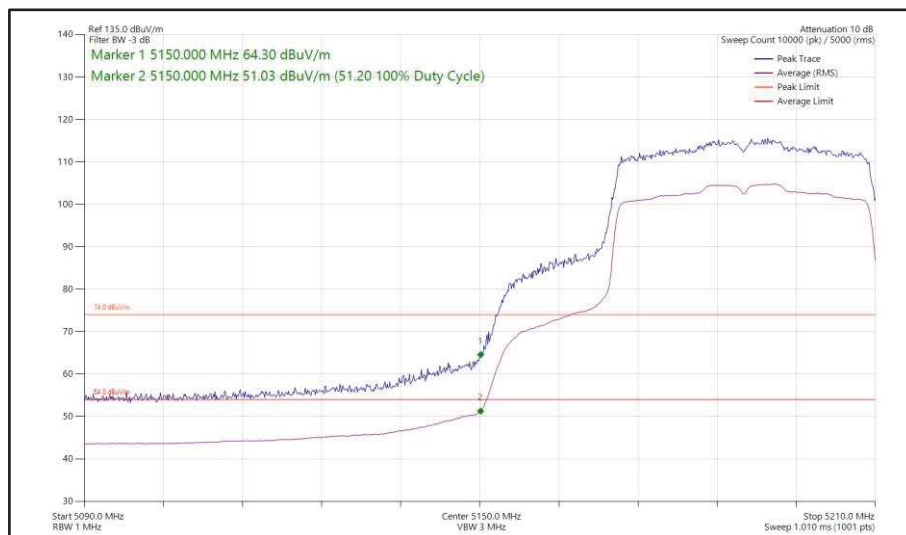


**Figure 97 - 802.11ax HE40, SU, SISO, Core 1 - 5190 MHz
Band Edge Frequency 5150 MHz**

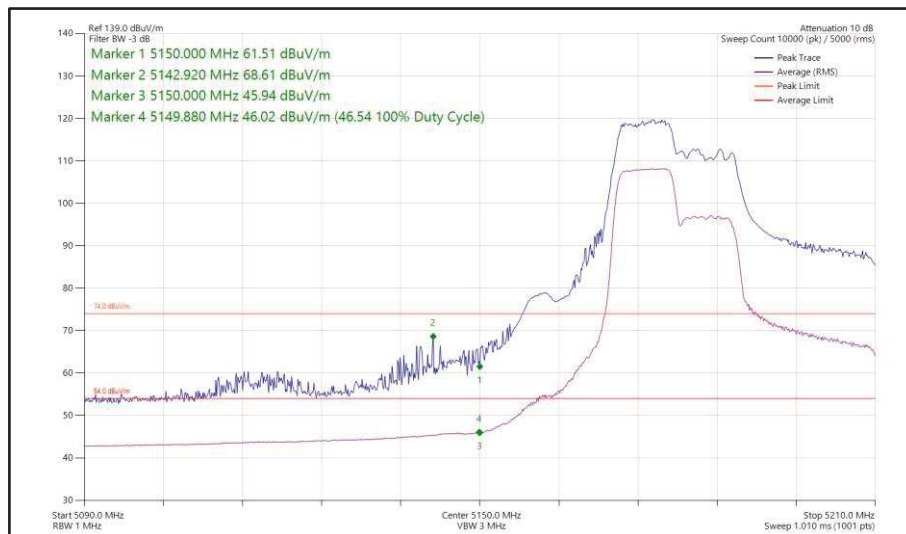


**Figure 98 - 802.11ax HE40, RU 106-53, SISO, Core 1 - 5190 MHz
Band Edge Frequency 5150 MHz**

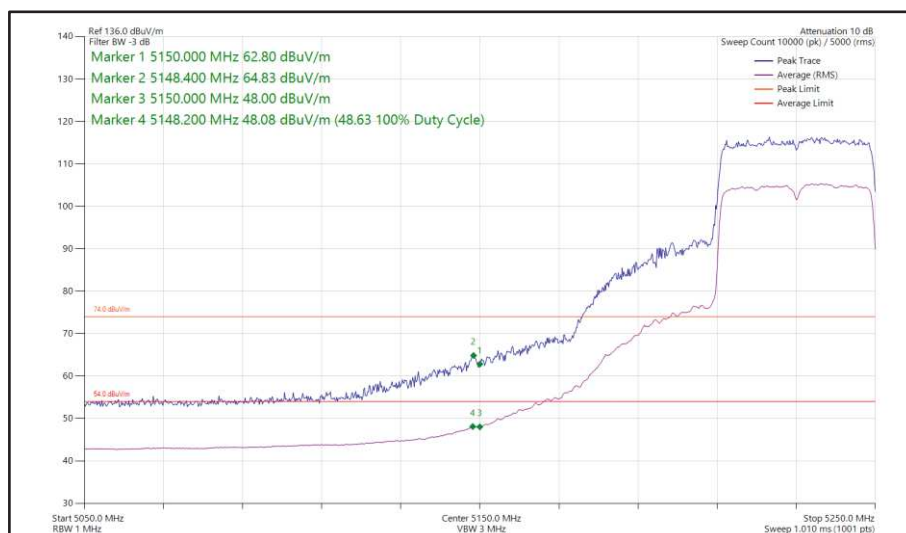


**Figure 99 - 802.11ax HE40, SU, SISO, Core 1 - 5230 MHz
Band Edge Frequency 5150 MHz**

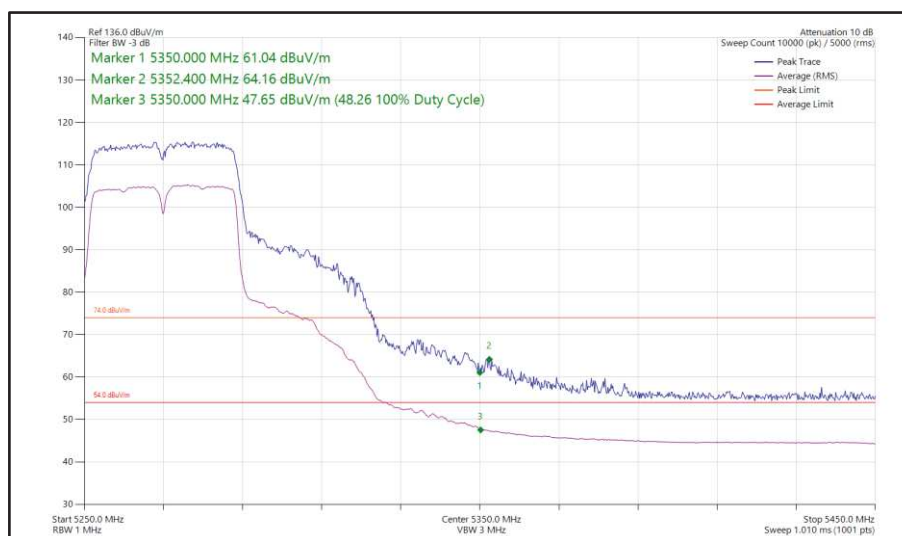


**Figure 100 - 802.11n HT40, SISO, Core 1 - 5270 MHz
Band Edge Frequency 5350 MHz**

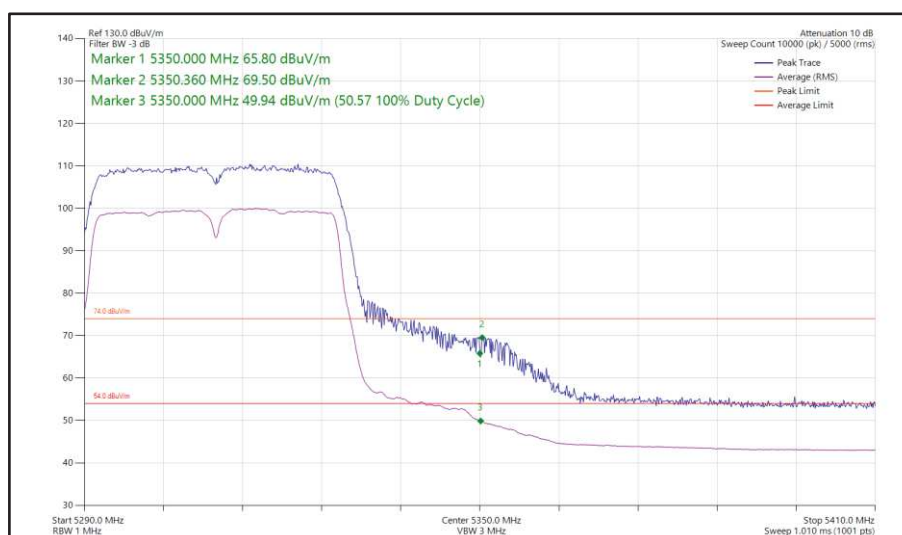


**Figure 101 - 802.11n HT40, SISO, Core 1 - 5310 MHz
Band Edge Frequency 5350 MHz**

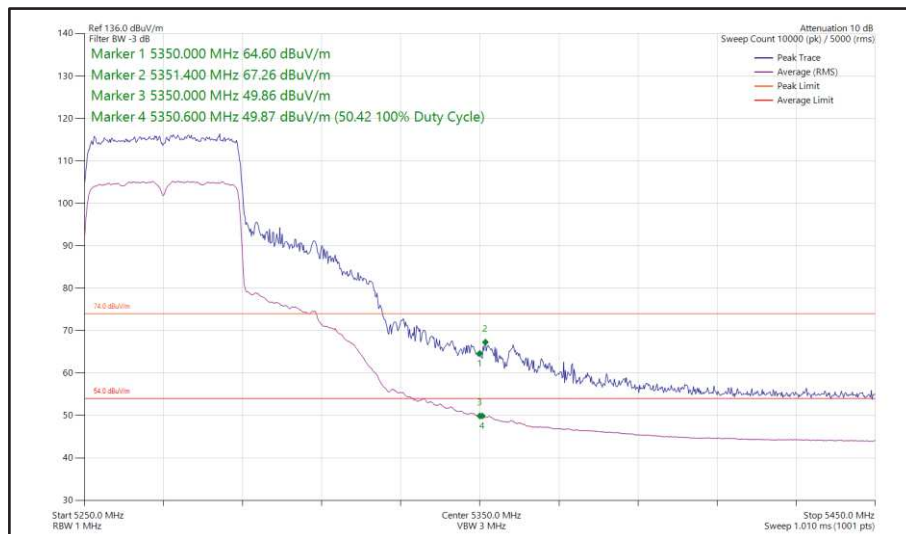


**Figure 102 - 802.11ax HE40, SU, SISO, Core 1 - 5270 MHz
Band Edge Frequency 5350 MHz**

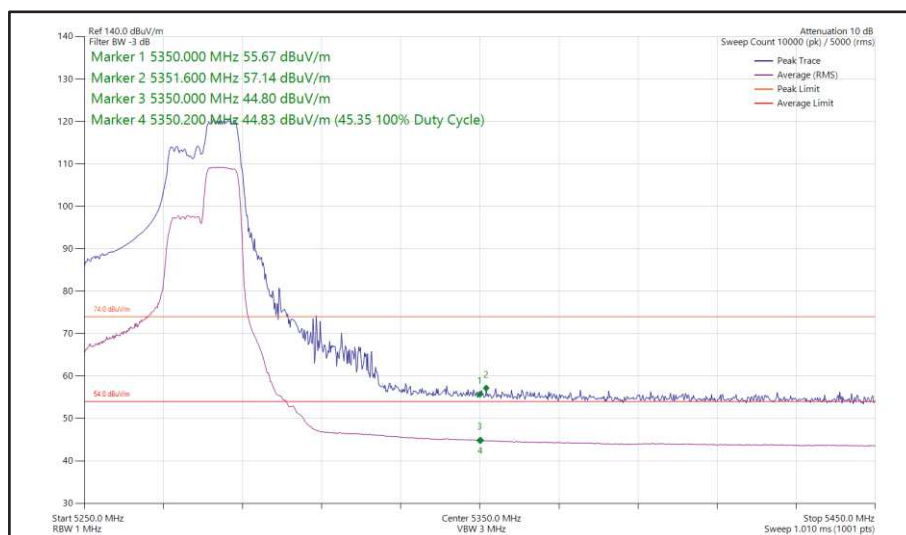


**Figure 103 - 802.11ax HE40, RU 106-56, SISO, Core 1 - 5270 MHz
Band Edge Frequency 5350 MHz**

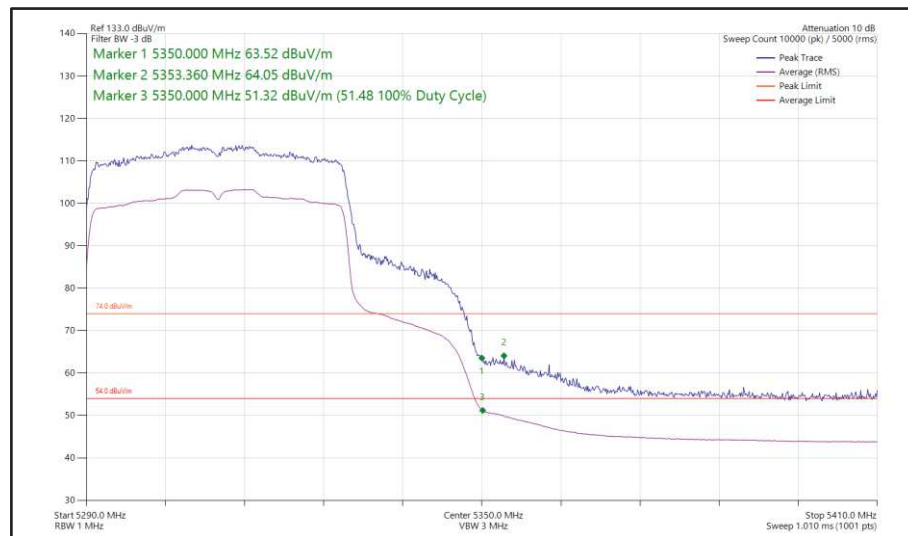


**Figure 104 - 802.11ax HE40, SU, SISO, Core 1 - 5310 MHz
Band Edge Frequency 5350 MHz**

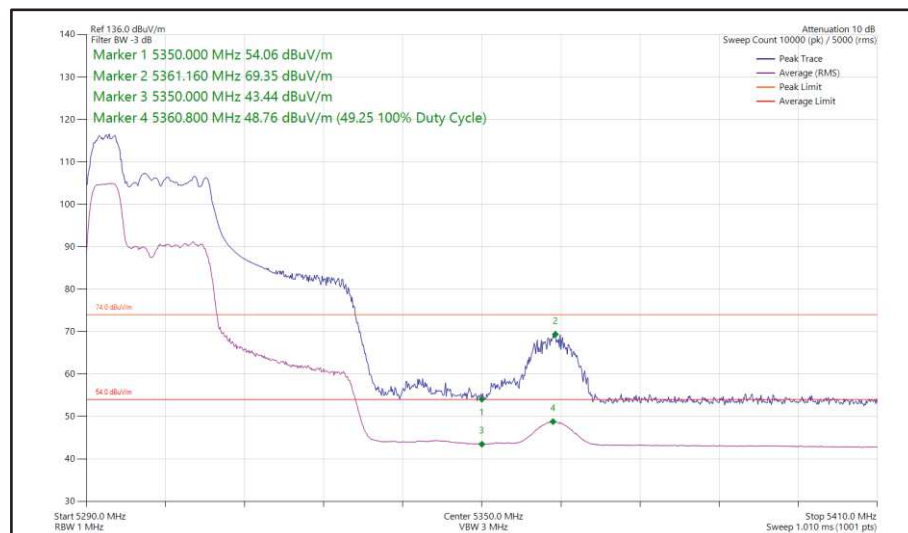


**Figure 105 - 802.11ax HE40, RU 52-37, SISO, Core 1 - 5310 MHz
Band Edge Frequency 5350 MHz**

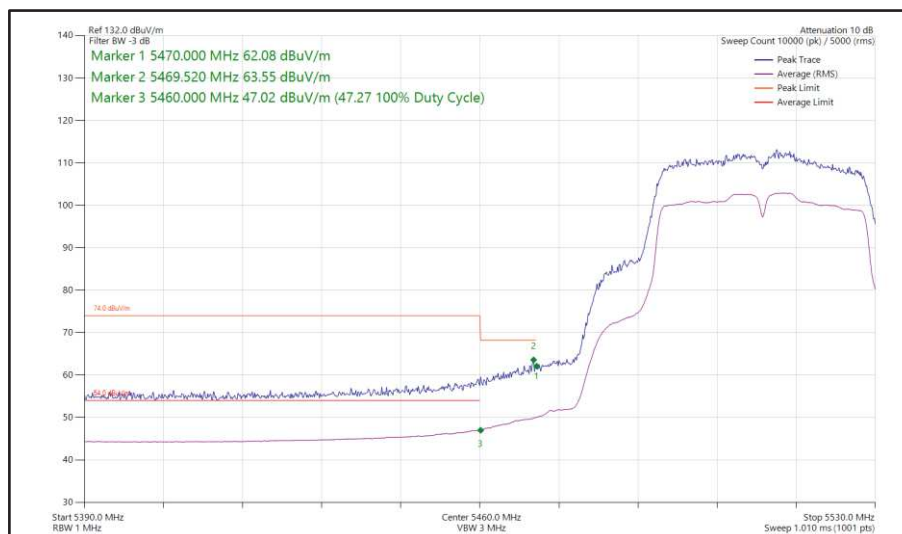


**Figure 106 - 802.11n HT40, SISO, Core 1 - 5510 MHz
Band Edge Frequency 5460 MHz**

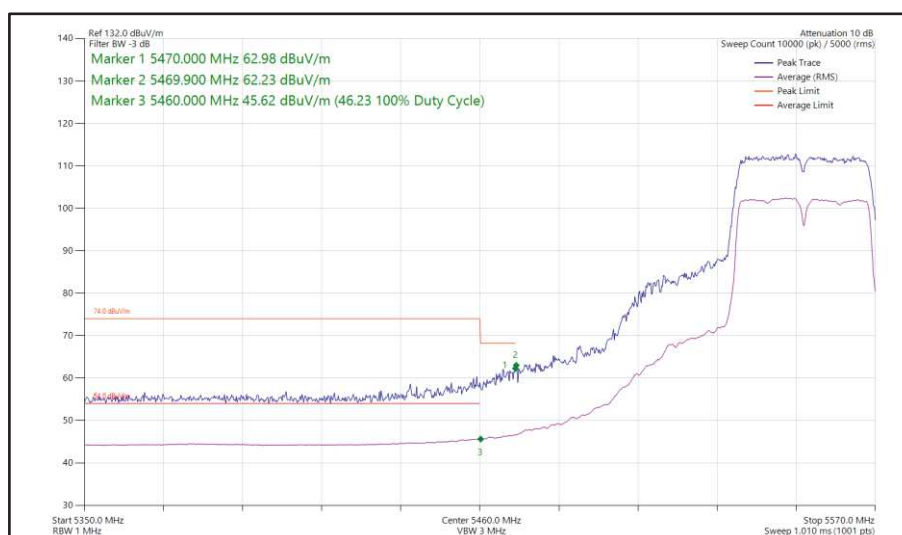


**Figure 107 - 802.11n HT40, SISO, Core 1 - 5550 MHz
Band Edge Frequency 5460 MHz**

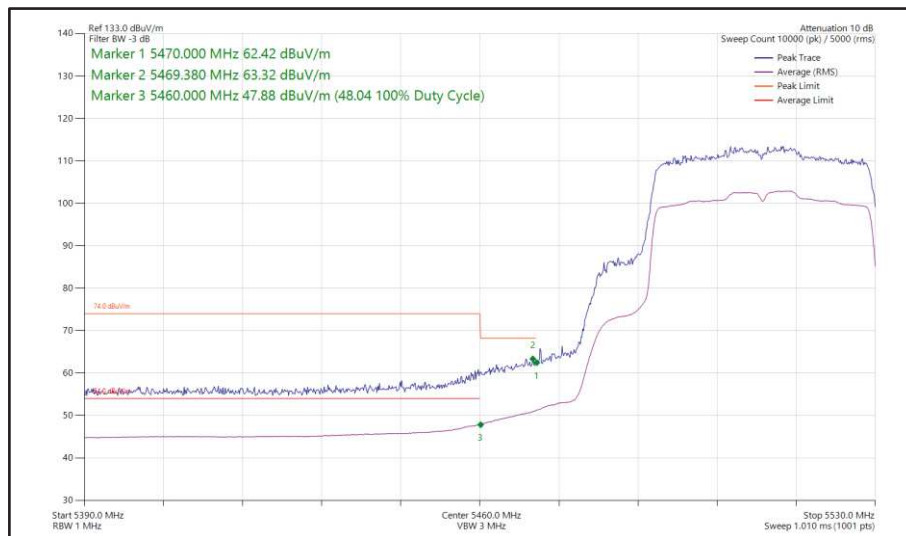

**Figure 108 - 802.11ax HE40, SU, SISO, Core 1 - 5510 MHz
Band Edge Frequency 5460 MHz**

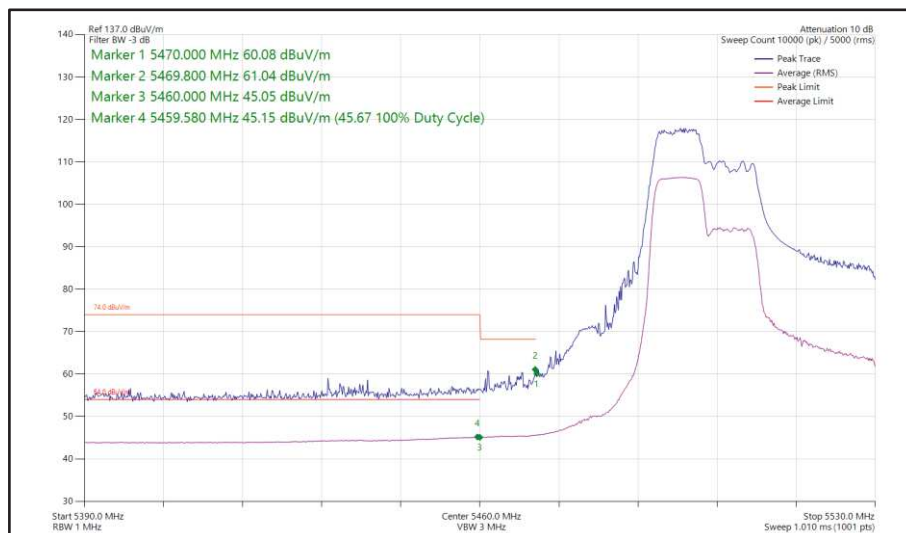

**Figure 109 - 802.11ax HE40, RU 106-53, SISO, Core 1 - 5510 MHz
Band Edge Frequency 5460 MHz**

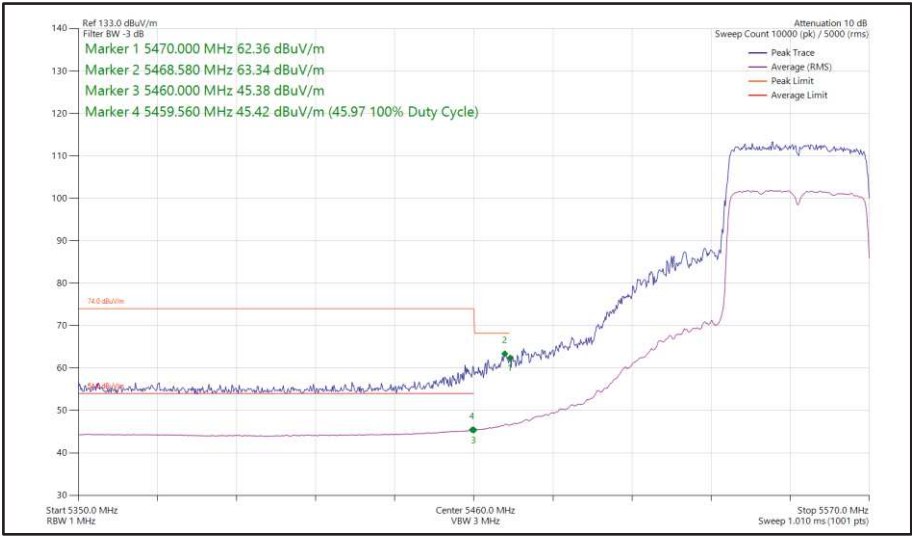

**Figure 110 - 802.11ax HE40, SU, SISO, Core 1 - 5550 MHz
Band Edge Frequency 5460 MHz**



40 MHz Bandwidth - Core 0 + Core 1 (CDD)

Mode	Data Rate/ MCS	Resource Size	Resource Index	TX Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dBμV/m)	Average Level (dBμV/m)
802.11n HT40	MCS2	-	-	5190	5150	64.87	51.36
802.11n HT40	MCS7	-	-	5230	5150	66.21	50.30
802.11ax HE40	MCS11x1	SU	-	5190	5150	68.43	51.19
802.11ax HE40	MCS11x1	106	53	5190	5150	69.41	48.81
802.11ax HE40	MCS11x1	SU	-	5230	5150	68.17	50.91
802.11n HT40	MCS7	-	-	5270	5350	67.15	51.35
802.11n HT40	MCS7	-	-	5310	5350	67.13	51.43
802.11ax HE40	MCS2x1	SU	-	5270	5350	63.67	51.27
802.11ax HE40	MCS11x1	106	56	5270	5350	58.95	47.20
802.11ax HE40	MCS11x1	SU	-	5310	5350	68.50	51.43
802.11ax HE40	MCS11x1	106	53	5310	5350	69.46	51.33
802.11n HT40	MCS4	-	-	5510	5460	62.20	47.38
802.11n HT40	MCS4	-	-	5550	5460	62.46	48.01
802.11ax HE40	MCS2x1	SU	-	5510	5460	63.63	47.58
802.11ax HE40	MCS11x1	106	53	5510	5460	63.58	47.24
802.11ax HE40	MCS11x1	SU	-	5550	5460	62.57	47.73

Table 13 - CDD Restricted Band Edge Results



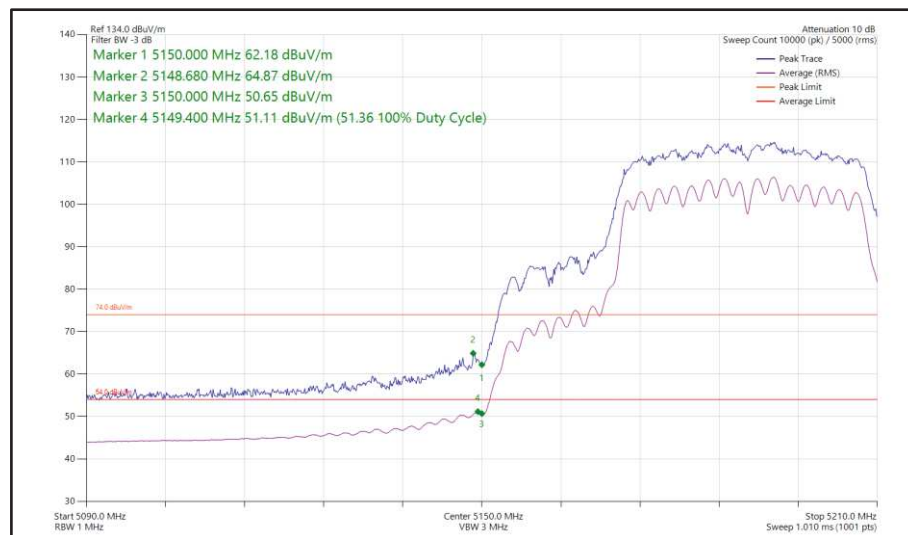



Figure 111 - 802.11n HT40, CDD, Core 0 + Core 1 - 5190 MHz
Band Edge Frequency 5150 MHz

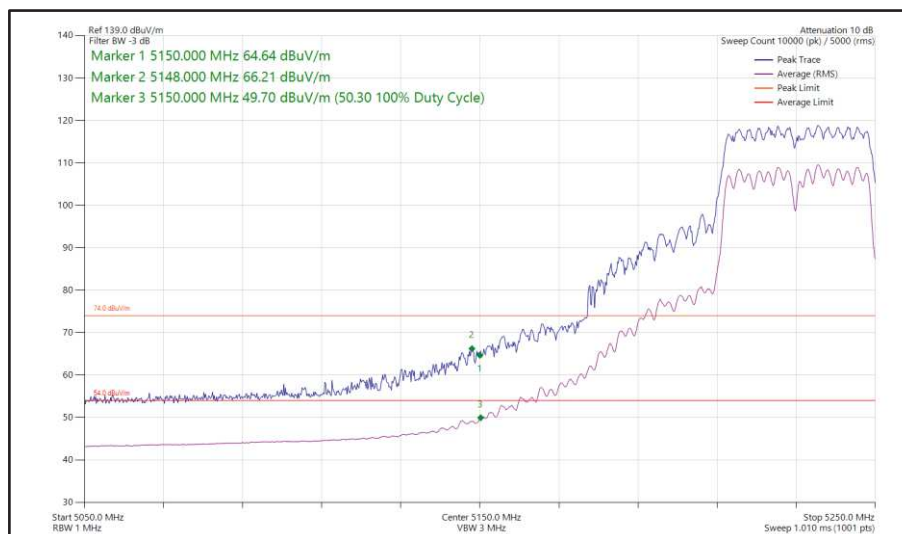


**Figure 112 - 802.11n HT40, CDD, Core 0 + Core 1 - 5230 MHz
Band Edge Frequency 5150 MHz**

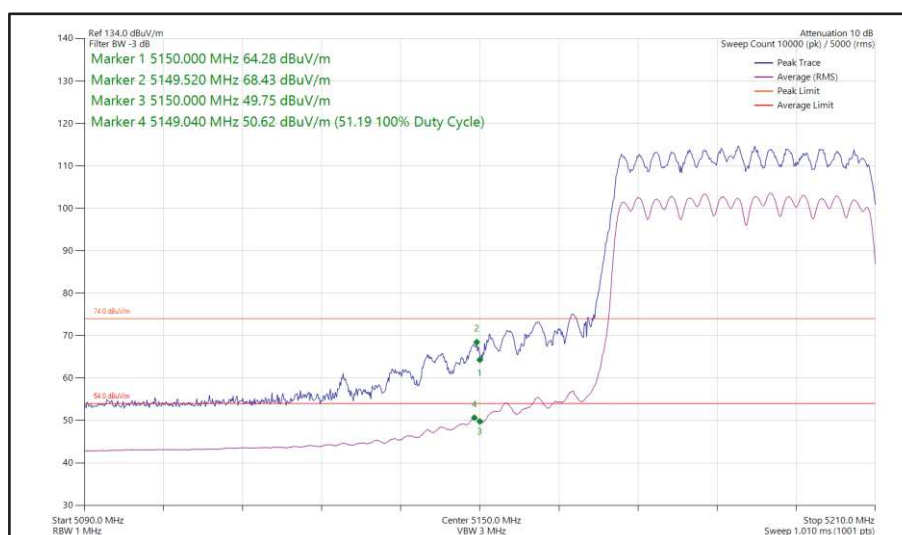


**Figure 113 - 802.11ax HE40, SU, CDD, Core 0 + Core 1 - 5190 MHz
Band Edge Frequency 5150 MHz**

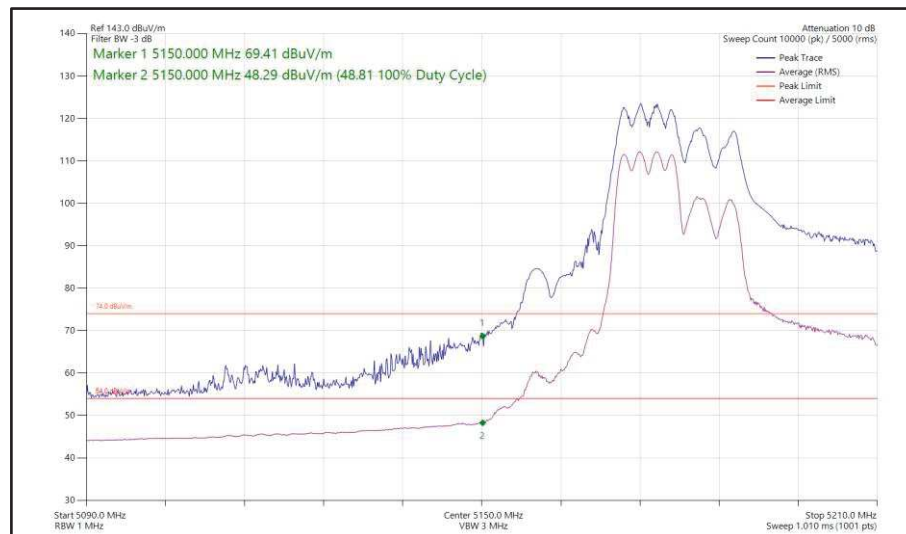


**Figure 114 - 802.11ax HE40, RU 106-53, CDD, Core 0 + Core 1 - 5190 MHz
Band Edge Frequency 5150 MHz**

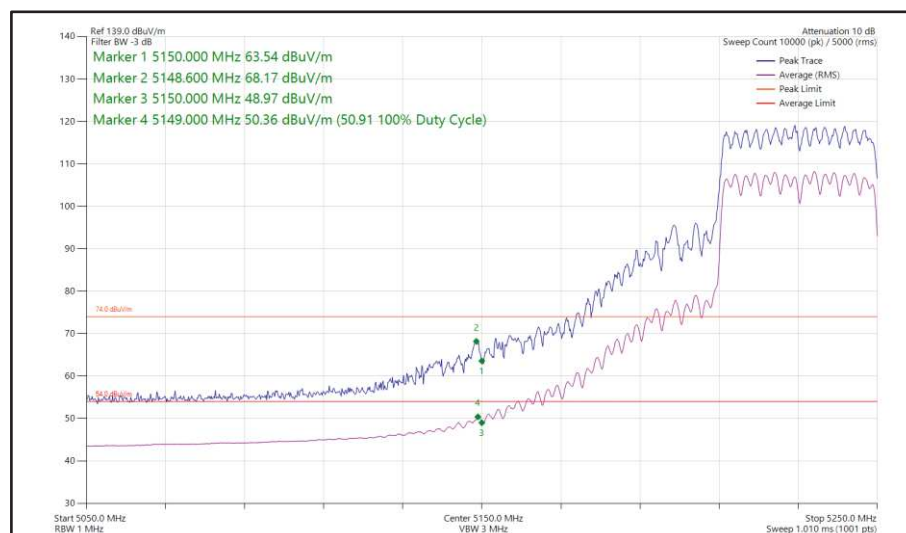


**Figure 115 - 802.11ax HE40, SU, CDD, Core 0 + Core 1 - 5230 MHz
Band Edge Frequency 5150 MHz**

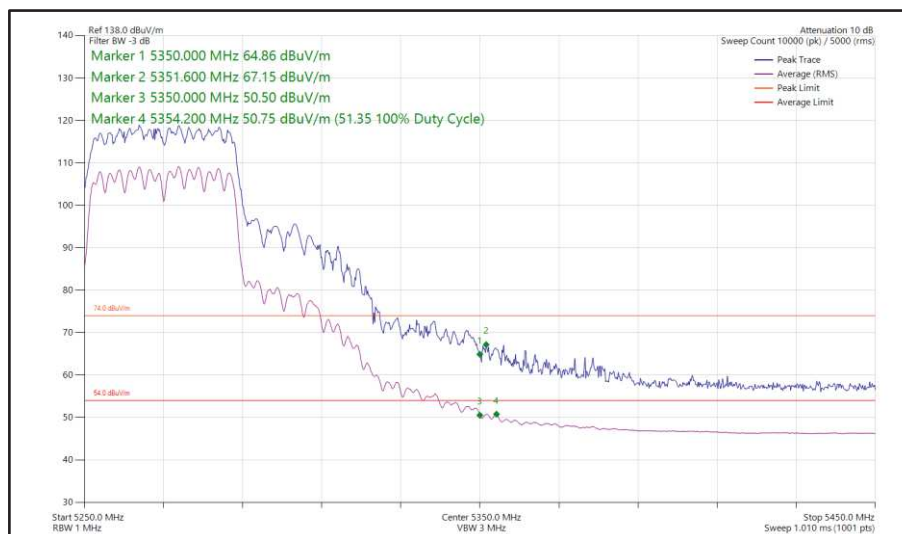


**Figure 116 - 802.11n HT40, CDD, Core 0 + Core 1 - 5270 MHz
Band Edge Frequency 5350 MHz**

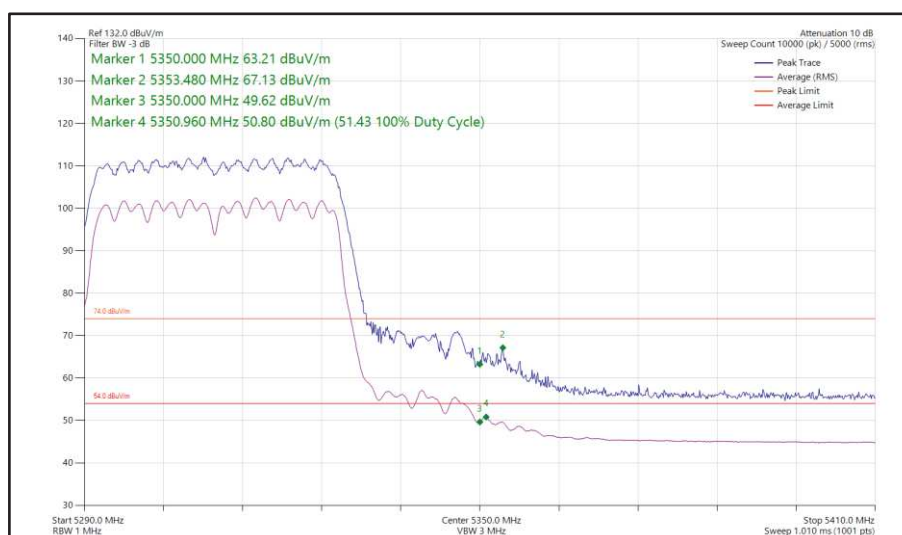


**Figure 117 - 802.11n HT40, CDD, Core 0 + Core 1 - 5310 MHz
Band Edge Frequency 5350 MHz**

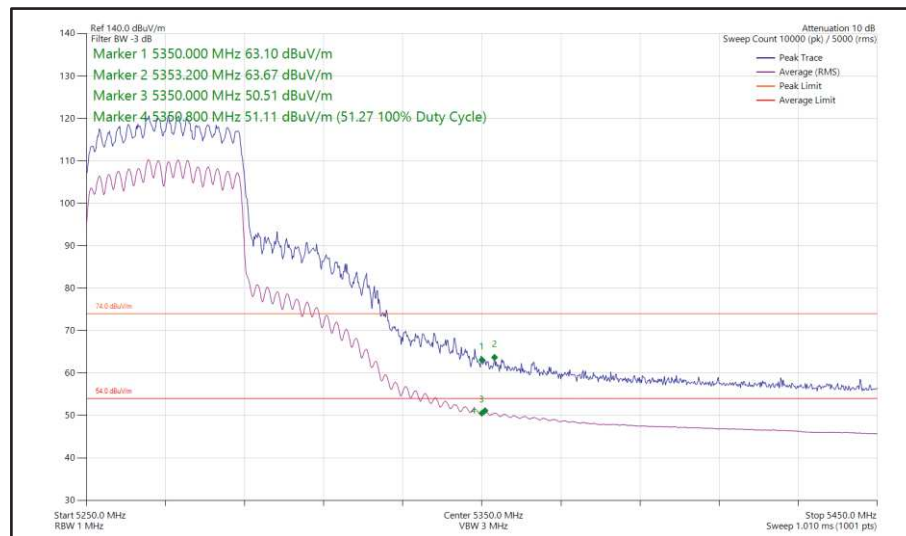


**Figure 118 - 802.11ax HE40, SU, CDD, Core 0 + Core 1 - 5270 MHz
Band Edge Frequency 5350 MHz**

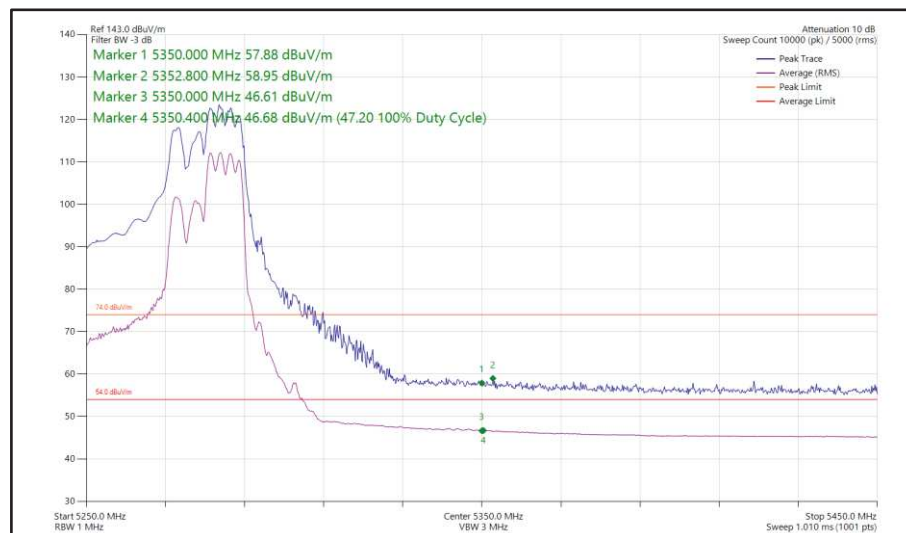


**Figure 119 - 802.11ax HE40, RU 106-56, CDD, Core 0 + Core 1 - 5270 MHz
Band Edge Frequency 5350 MHz**

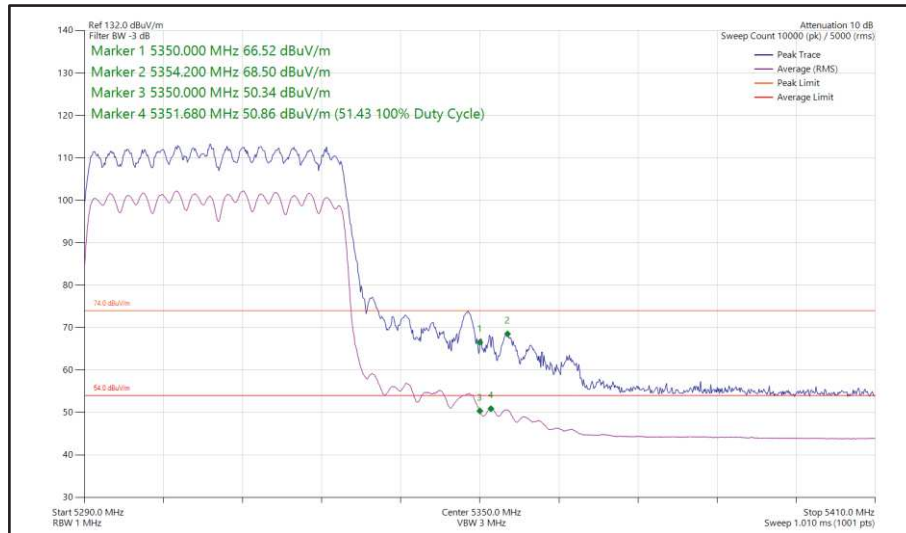


**Figure 120 - 802.11ax HE40, SU, CDD, Core 0 + Core 1 - 5310 MHz
Band Edge Frequency 5350 MHz**

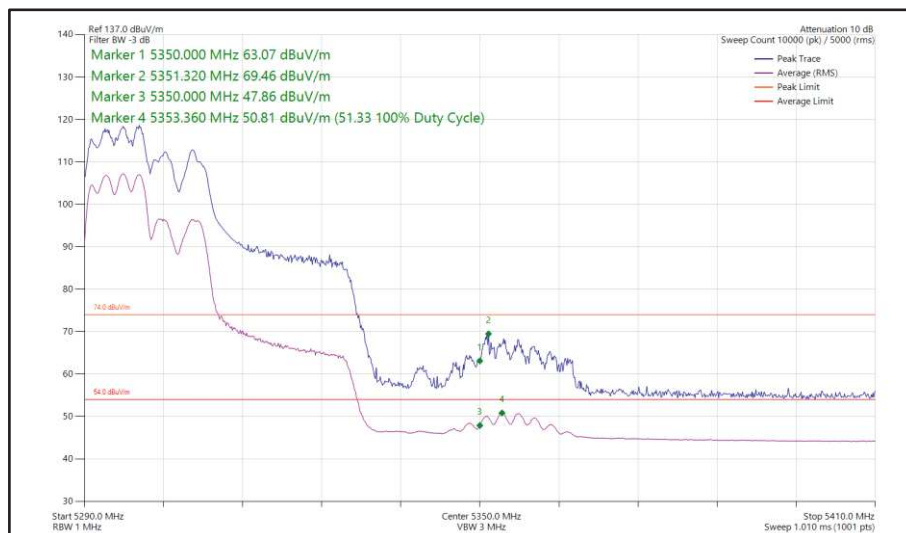


**Figure 121 - 802.11ax HE40, RU 106-53, CDD, Core 0 + Core 1 - 5310 MHz
Band Edge Frequency 5350 MHz**

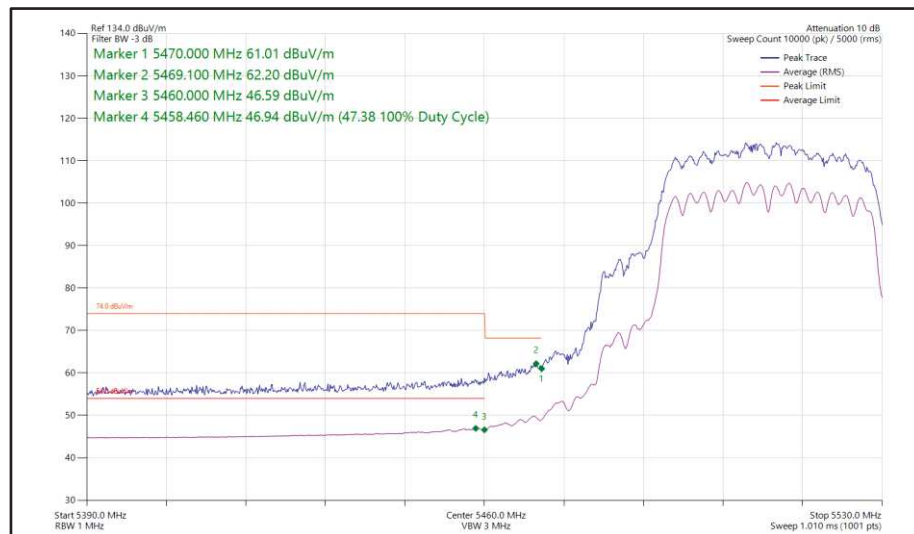


**Figure 122 - 802.11n HT40, CDD, Core 0 + Core 1 - 5510 MHz
Band Edge Frequency 5460 MHz**

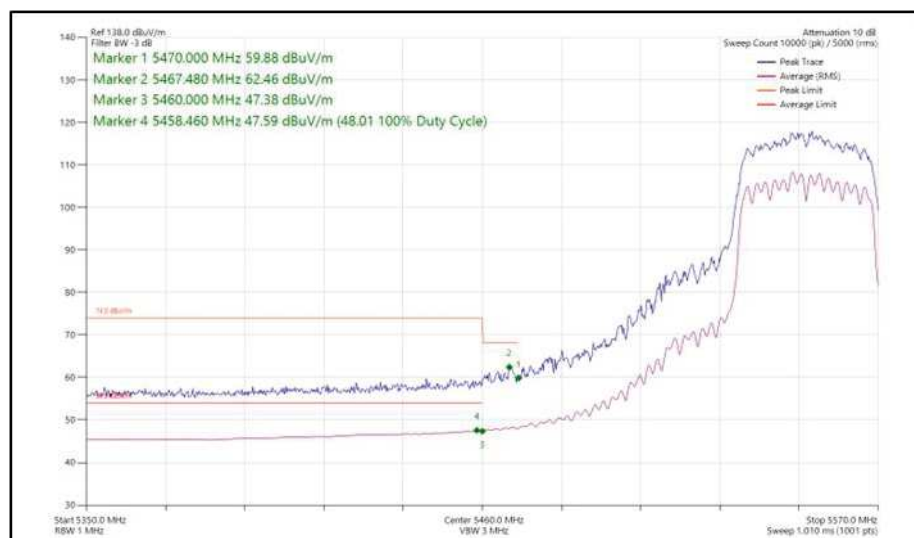


**Figure 123 - 802.11n HT40, CDD, Core 0 + Core 1 - 5550 MHz
Band Edge Frequency 5460 MHz**

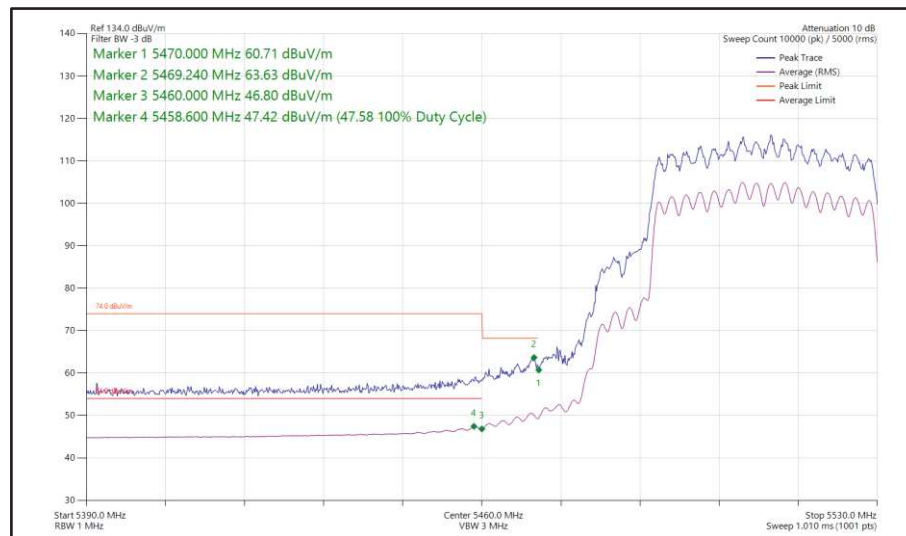

**Figure 124 - 802.11ax HE40, SU, CDD, Core 0 + Core 1 - 5510 MHz
Band Edge Frequency 5460 MHz**

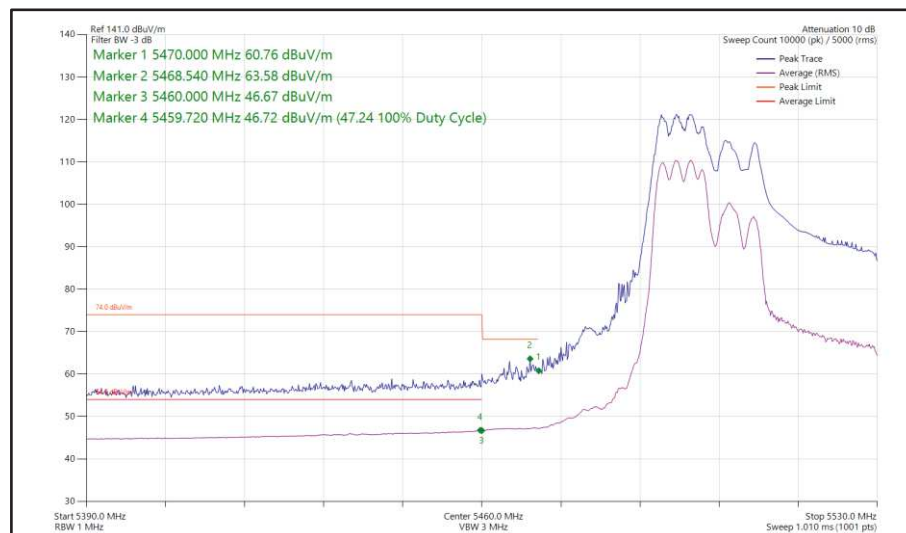

**Figure 125 - 802.11ax HE40, RU 106-53, CDD, Core 0 + Core 1 - 5510 MHz
Band Edge Frequency 5460 MHz**

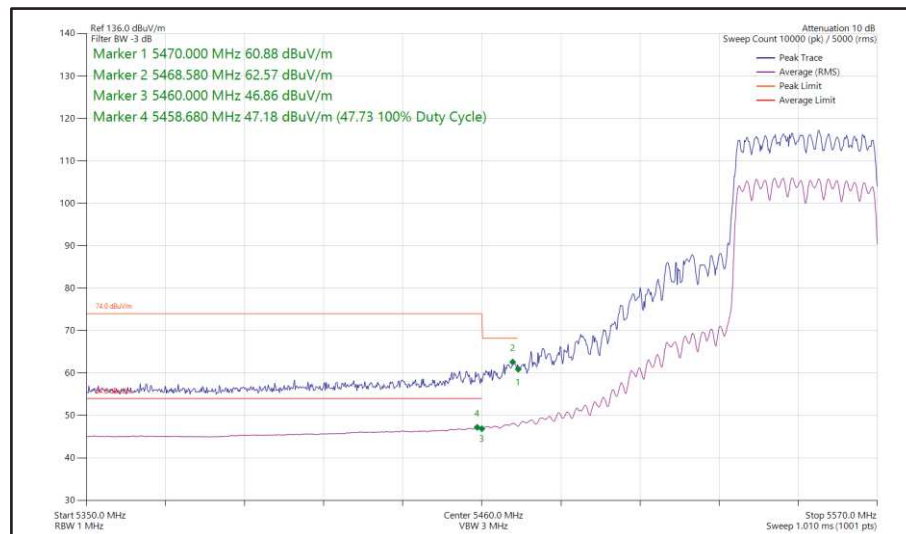

**Figure 126 - 802.11ax HE40, SU, CDD, Core 0 + Core 1 - 5550 MHz
Band Edge Frequency 5460 MHz**



40 MHz Bandwidth - Core 0 + Core 1 (SDM)

Mode	Data Rate/ MCS	Resource Size	Resource Index	TX Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dBμV/m)	Average Level (dBμV/m)
802.11n HT40	MCS15	-	-	5190	5150	69.44	50.96
802.11n HT40	MCS15	-	-	5230	5150	65.20	49.88
802.11ax HE40	MCS4x2	SU	-	5190	5150	64.28	50.93
802.11ax HE40	MCS11x2	106	56	5190	5150	62.61	49.30
802.11ax HE40	MCS4x2	SU	-	5230	5150	65.74	51.00
802.11n HT40	MCS15	-	-	5270	5350	67.14	51.05
802.11n HT40	MCS10	-	-	5310	5350	64.69	51.16
802.11ax HE40	MCS11x2	SU	-	5270	5350	66.49	51.46
802.11ax HE40	MCS11x2	106	56	5270	5350	58.37	47.01
802.11ax HE40	MCS11x2	SU	-	5310	5350	68.23	51.38
802.11ax HE40	MCS11x2	106	53	5310	5350	68.74	51.11
802.11n HT40	MCS10	-	-	5510	5460	63.52	48.28
802.11n HT40	MCS15	-	-	5550	5460	63.24	46.90
802.11ax HE40	MCS11x2	SU	-	5510	5460	63.62	46.57
802.11ax HE40	MCS11x2	106	53	5510	5460	63.46	47.52
802.11ax HE40	MCS4x2	SU	-	5550	5460	63.67	48.41

Table 14 - SDM Restricted Band Edge Results



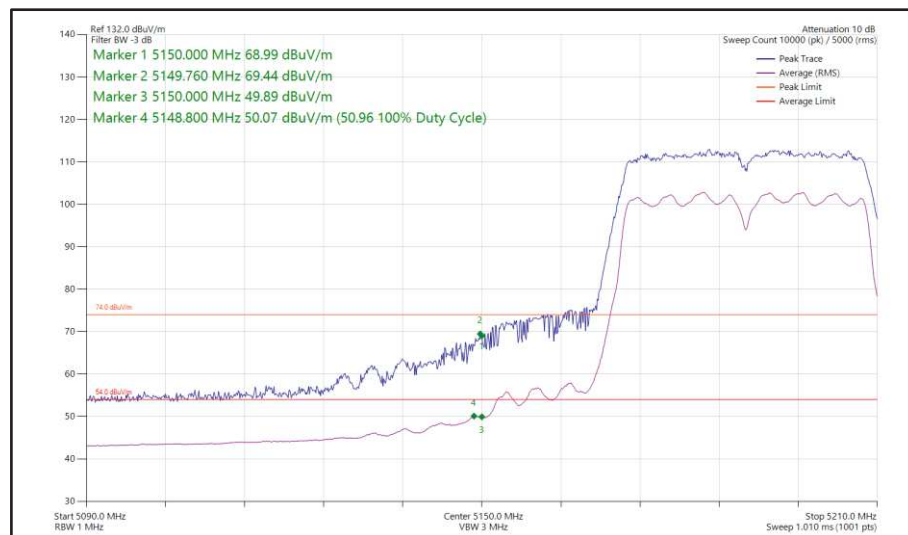



Figure 127 - 802.11n HT40, SDM, Core 0 + Core 1 - 5190 MHz
Band Edge Frequency 5150 MHz

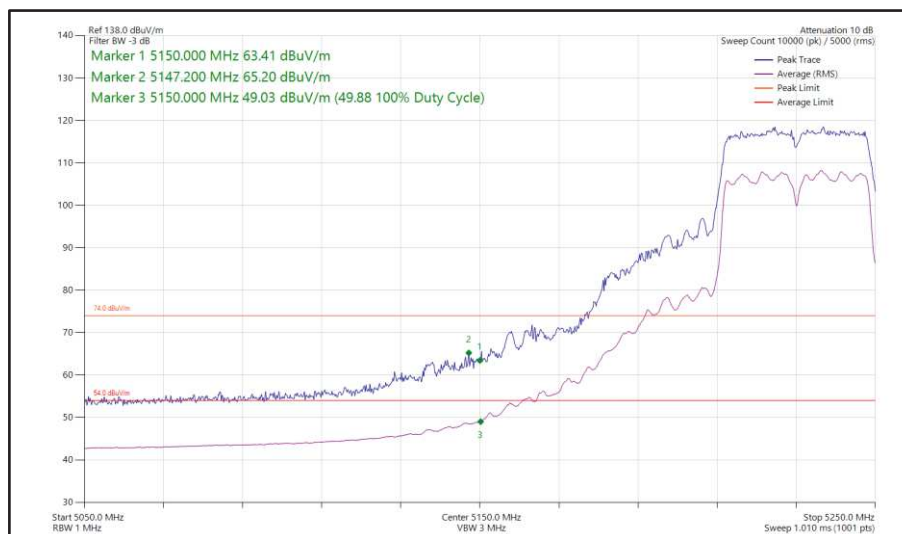


**Figure 128 - 802.11n HT40, SDM, Core 0 + Core 1 - 5230 MHz
Band Edge Frequency 5150 MHz**

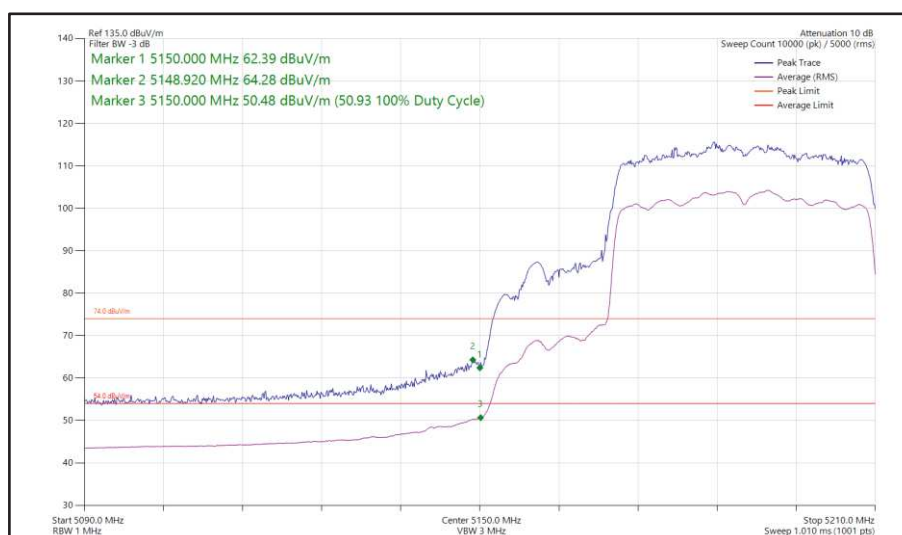


**Figure 129 - 802.11ax HE40, SU, SDM, Core 0 + Core 1 - 5190 MHz
Band Edge Frequency 5150 MHz**

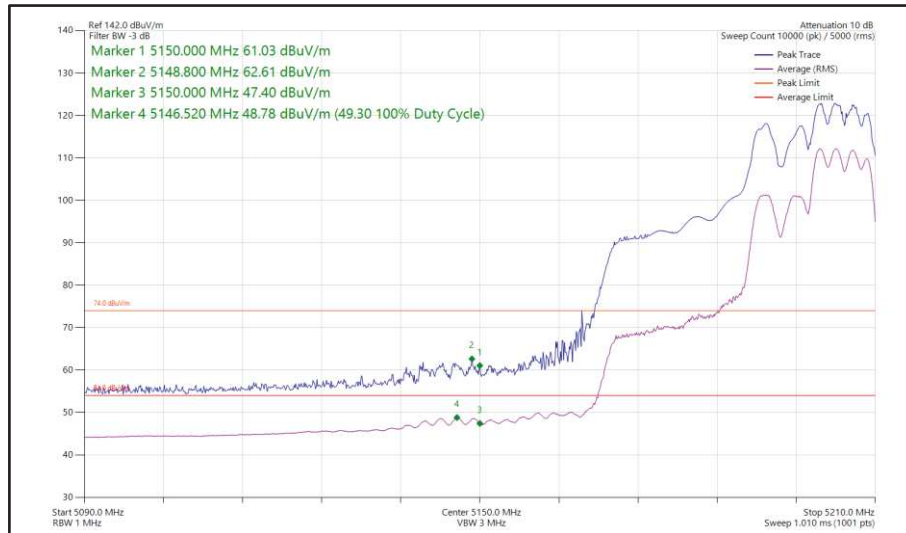


**Figure 130 - 802.11ax HE40, RU 106-56, SDM, Core 0 + Core 1 - 5190 MHz
Band Edge Frequency 5150 MHz**

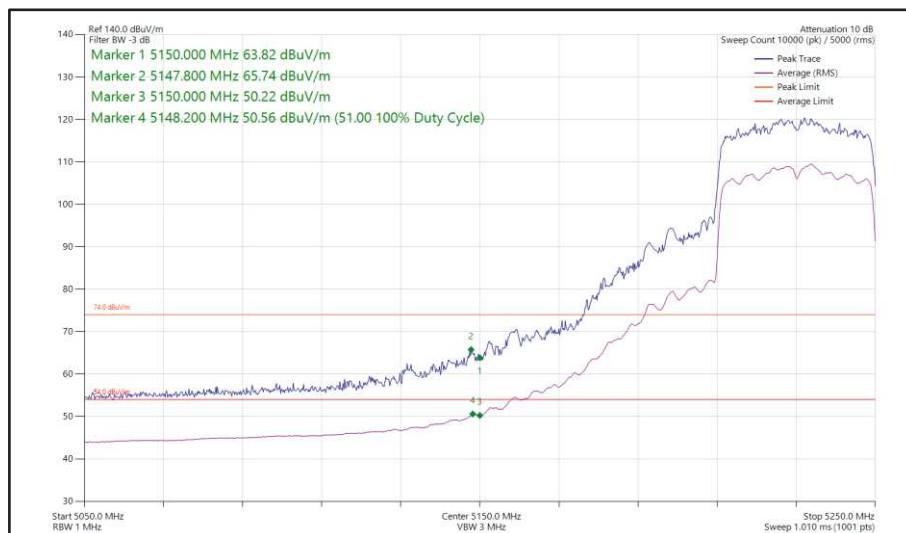


**Figure 131 - 802.11ax HE40, SU, SDM, Core 0 + Core 1 - 5230 MHz
Band Edge Frequency 5150 MHz**

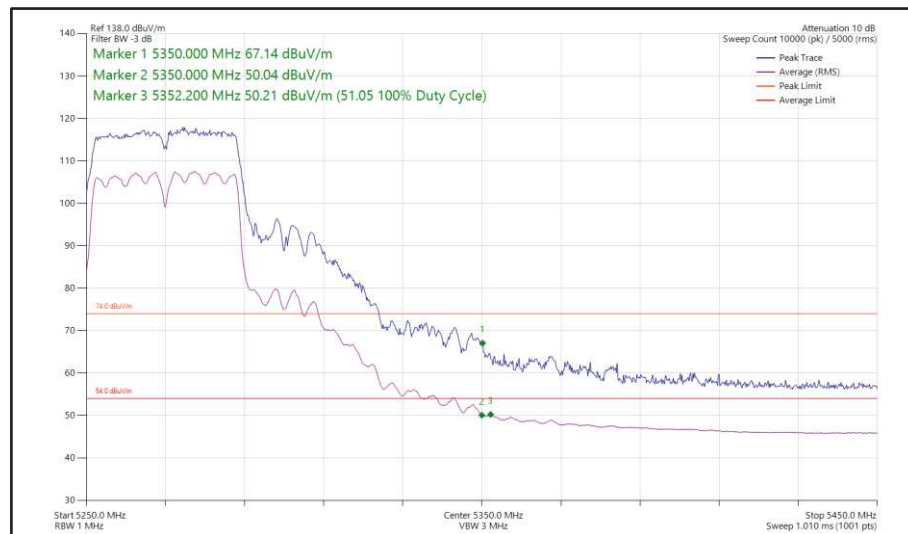


**Figure 132 - 802.11n HT40, SDM, Core 0 + Core 1 - 5270 MHz
Band Edge Frequency 5350 MHz**

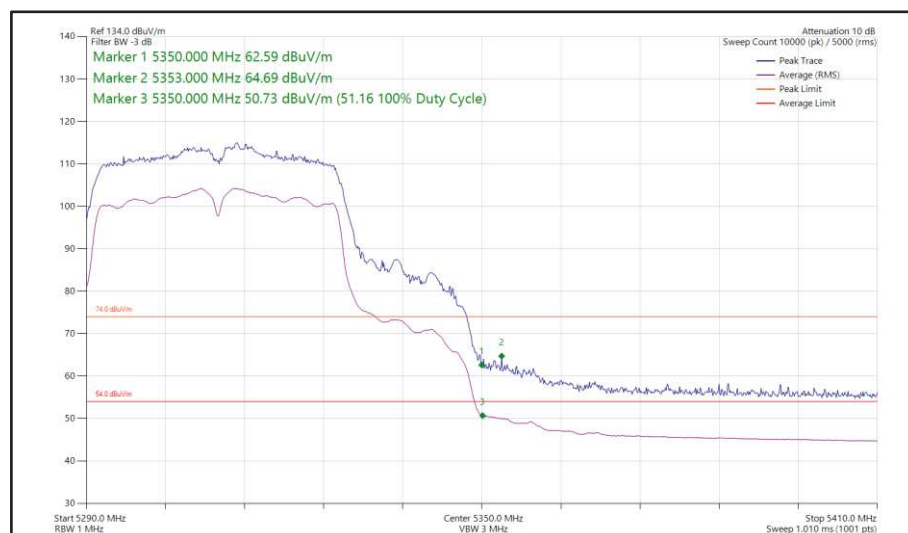


**Figure 133 - 802.11n HT40, SDM, Core 0 + Core 1 - 5310 MHz
Band Edge Frequency 5350 MHz**

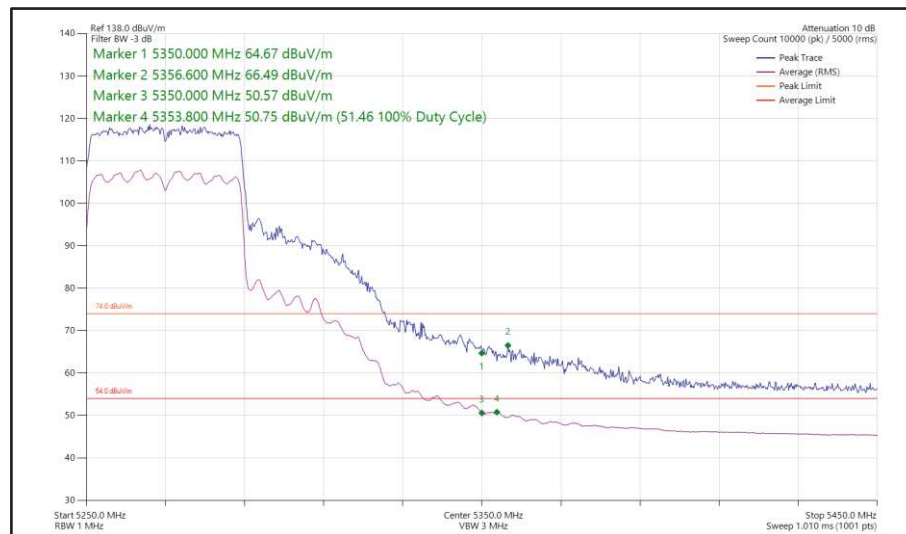


**Figure 134 - 802.11ax HE40, SU, SDM, Core 0 + Core 1 - 5270 MHz
Band Edge Frequency 5350 MHz**

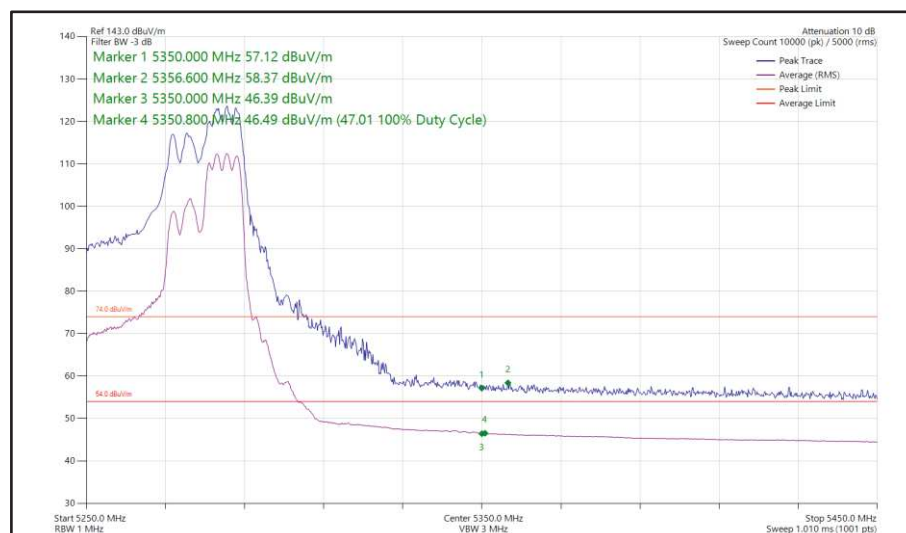


**Figure 135 - 802.11ax HE40, RU 106-56, SDM, Core 0 + Core 1 - 5270 MHz
Band Edge Frequency 5350 MHz**

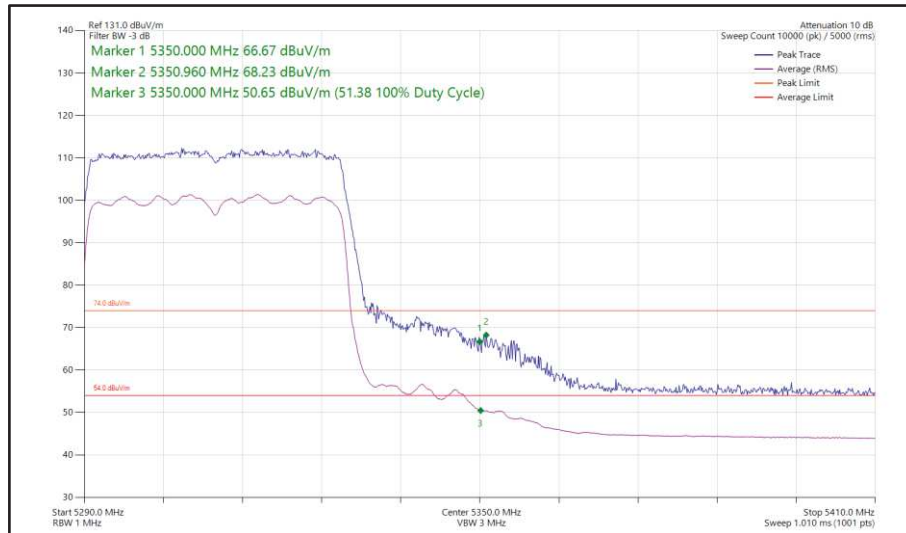


**Figure 136 - 802.11ax HE40, SU, SDM, Core 0 + Core 1 - 5310 MHz
Band Edge Frequency 5350 MHz**

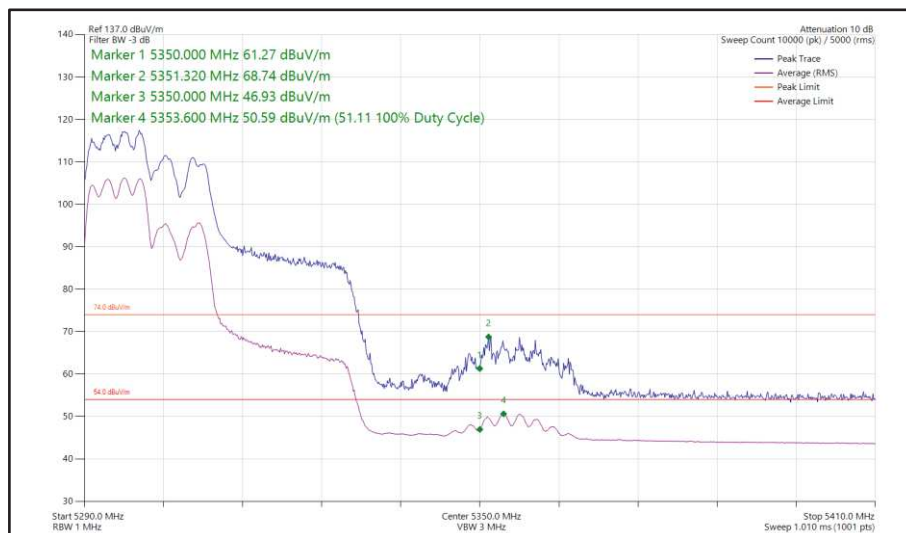

**Figure 137 - 802.11ax HE40, RU 106-53, SDM, Core 0 + Core 1 - 5310 MHz
Band Edge Frequency 5350 MHz**

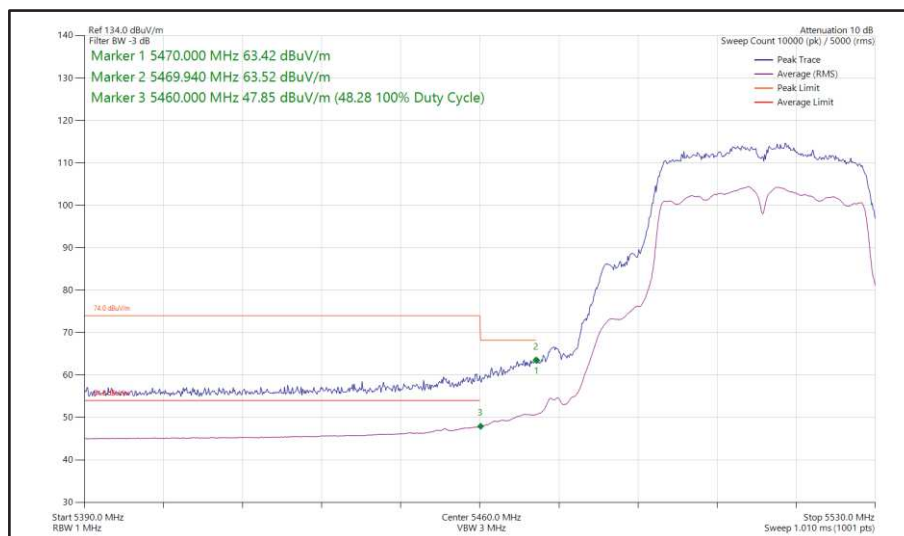

**Figure 138 - 802.11n HT40, SDM, Core 0 + Core 1 - 5510 MHz
Band Edge Frequency 5460 MHz**

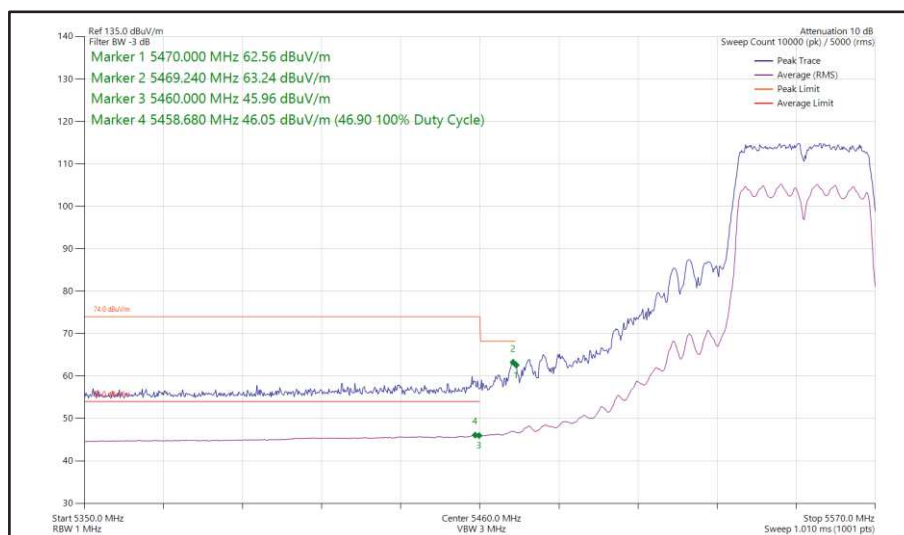

**Figure 139 - 802.11n HT40, SDM, Core 0 + Core 1 - 5550 MHz
Band Edge Frequency 5460 MHz**