



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	95.4
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.13
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5210	12.13	13.38	-	-	15.81	24.00	-8.19

Table 404 - FCC Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU	Duty Cycle (%):	92.8
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.33
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.13
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250	5.86	6.59	-	-	9.25	24.00	-14.75

Table 405 - FCC Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	94.0
Modulation Coding Scheme:	MCS10	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.13
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ				
5180	17.760	8.74	10.15	-	-	12.51	5.13	17.64	22.49	-4.85
5220	17.640	8.84	9.98	-	-	12.46	5.13	17.59	22.46	-4.88
5240	17.700	9.18	10.14	-	-	12.70	5.13	17.83	22.48	-4.65

Table 406 - ISED Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	89.9
Modulation Coding Scheme:	MCS10	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.13
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ				
5190	36.600	11.15	12.47	-	-	14.87	5.13	20.00	23.00	-3.00
5230	36.240	11.48	12.40	-	-	14.97	5.13	20.11	23.00	-2.89

Table 407 - ISED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	83.2
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.13
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ				
5210	75.460	12.16	13.41	-	-	15.84	5.13	20.97	23.00	-2.03

Table 408 - ISED Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.2.4
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT160	Duty Cycle (%):	79.0
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	1.02
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.13
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ				
5250	76.860	6.50	7.18	-	-	9.86	5.13	15.00	23.00	-8.00

Table 409 - ISED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	95.7
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.13
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ				
5180	18.960	8.60	9.95	-	-	12.34	5.13	17.47	22.78	-5.31
5220	18.900	9.11	10.22	-	-	12.71	5.13	17.84	22.76	-4.92
5240	18.960	8.90	9.91	-	-	12.44	5.13	17.58	22.78	-5.20

Table 410 - ISED Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	95.7
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.13
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ				
5190	37.920	11.24	12.57	-	-	14.96	5.13	20.10	23.00	-2.90
5230	37.800	11.61	12.58	-	-	15.13	5.13	20.27	23.00	-2.73

Table 411 - ISED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	95.5
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.13
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ				
5210	77.000	12.19	13.45	-	-	15.87	5.13	21.01	23.00	-1.99

Table 412 - ISED Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.2.4
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU	Duty Cycle (%):	92.9
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.32
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.13
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ				
5250	77.700	5.86	6.66	-	-	9.29	5.13	14.42	23.00	-8.58

Table 413 - ISED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	94.1
Modulation Coding Scheme:	MCS10	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.49
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5260	20.940	15.93	16.27	-	-	19.11	24.00	-4.89
5300	20.880	16.42	15.88	-	-	19.17	24.00	-4.83
5320	22.020	16.47	15.48	-	-	19.01	24.00	-4.99

Table 414 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5260	17.700	15.93	16.27	-	-	19.11	23.48	-4.37	5.49	24.60	29.48	-4.88
5300	17.700	16.42	15.88	-	-	19.17	23.48	-4.31	5.49	24.66	29.48	-4.82
5320	17.820	16.47	15.48	-	-	19.01	23.51	-4.50	5.49	24.50	29.51	-5.01

Table 415 - ISED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	89.8
Modulation Coding Scheme:	MCS10	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.49
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5270	41.200	18.63	18.84	-	-	21.74	24.00	-2.26
5310	43.200	13.67	13.02	-	-	16.37	24.00	-7.63

Table 416 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5270	36.360	18.63	18.84	-	-	21.74	24.00	-2.26	5.49	27.24	30.00	-2.76
5310	36.600	13.67	13.02	-	-	16.37	24.00	-7.63	5.49	21.86	30.00	-8.14

Table 417 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	83.3
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.49
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5290	84.480	14.18	13.81	-	-	17.01	24.00	-6.99

Table 418 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5290	75.680	14.18	13.81	-	-	17.01	24.00	-6.99	5.49	22.50	30.00	-7.50

Table 419 - ISED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2)	Test Method(s):	C63.10 12.4.2.4
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT160	Duty Cycle (%):	79.1
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	1.02
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.49
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5250	83.160	7.05	7.38	-	-	10.23	24.00	-13.77

Table 420 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5250	77.280	7.06	7.36	-	-	10.22	24.00	-13.78	5.49	15.72	30.00	-14.28

Table 421 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	95.9
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.49
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5260	20.940	16.00	16.33	-	-	19.18	24.00	-4.82
5300	20.940	16.43	16.14	-	-	19.30	24.00	-4.70
5320	21.780	16.49	15.59	-	-	19.08	24.00	-4.92

Table 422 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5260	18.900	16.00	16.33	-	-	19.18	23.76	-4.59	5.49	24.67	29.76	-5.10
5300	18.900	16.43	16.14	-	-	19.30	23.76	-4.46	5.49	24.79	29.76	-4.97
5320	18.960	16.49	15.59	-	-	19.08	23.78	-4.70	5.49	24.57	29.78	-5.21

Table 423 - ISED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	95.8
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.49
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5270	41.640	18.45	18.70	-	-	21.58	24.00	-2.42
5310	43.440	13.21	12.83	-	-	16.04	24.00	-7.96

Table 424 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5270	37.800	18.45	18.70	-	-	21.58	24.00	-2.42	5.49	27.08	30.00	-2.92
5310	37.920	13.21	12.83	-	-	16.04	24.00	-7.96	5.49	21.53	30.00	-8.47

Table 425 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	95.4
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.49
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5290	82.280	13.79	13.53	-	-	16.67	24.00	-7.33

Table 426 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5290	77.000	13.79	13.53	-	-	16.67	24.00	-7.33	5.49	22.17	30.00	-7.83

Table 427 - ISED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2)	Test Method(s):	C63.10 12.4.2.4
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU	Duty Cycle (%):	92.8
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.33
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.49
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5250	82.320	6.39	6.79	-	-	9.60	24.00	-14.40

Table 428 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5250	77.700	6.37	6.83	-	-	9.61	24.00	-14.39	5.49	15.11	30.00	-14.89

Table 429 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	94.0
Modulation Coding Scheme:	MCS10	DCCF (dB):	0.27
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.14
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5500	21.780	16.45	15.34	-	-	18.94	24.00	-5.06
5600	21.060	16.29	15.43	-	-	18.90	24.00	-5.10
5700	21.660	15.93	14.86	-	-	18.44	24.00	-5.56
5720	15.440	15.50	14.92	-	-	18.23	22.89	-4.65

Table 430 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5500	17.820	16.45	15.34	-	-	18.94	23.51	-4.57	5.14	24.08	29.51	-5.43
5580	17.700	16.37	15.61	-	-	19.01	23.48	-4.47	5.14	24.15	29.48	-5.33
5700	17.820	15.93	14.86	-	-	18.44	23.51	-5.07	5.14	23.58	29.51	-5.93
5720	13.760	15.50	14.92	-	-	18.23	22.39	-4.15	5.14	23.37	28.39	-5.01

Table 431 - ISD Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	89.7
Modulation Coding Scheme:	MCS10	DCCF (dB):	0.47
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.14
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5510	42.000	14.88	13.83	-	-	17.40	24.00	-6.60
5590	41.300	19.00	18.06	-	-	21.57	24.00	-2.43
5670	43.560	17.38	16.13	-	-	19.81	24.00	-4.19
5710	35.640	18.47	17.49	-	-	21.02	24.00	-2.98

Table 432 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5510	36.480	14.88	13.83	-	-	17.40	24.00	-6.60	5.14	22.54	30.00	-7.46
5550	36.480	18.81	17.98	-	-	21.43	24.00	-2.57	5.14	26.57	30.00	-3.43
5670	36.600	17.38	16.13	-	-	19.81	24.00	-4.19	5.14	24.95	30.00	-5.05
5710	32.800	18.47	17.49	-	-	21.02	24.00	-2.98	5.14	26.16	30.00	-3.84

Table 433 - ISD Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	83.3
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.79
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.14
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5530	85.360	13.81	12.97	-	-	16.42	24.00	-7.58
5610	85.140	18.96	17.57	-	-	21.33	24.00	-2.67
5690	75.920	19.71	18.33	-	-	22.09	24.00	-1.91

Table 434 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5530	75.680	13.81	12.97	-	-	16.42	24.00	-7.58	5.14	21.56	30.00	-8.44
5690	71.960	19.71	18.33	-	-	22.09	24.00	-1.91	5.14	27.23	30.00	-2.77

Table 435 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ac VHT160	Duty Cycle (%):	79.0
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.14
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5570	165.900	12.67	11.64	-	-	15.20	24.00	-8.80

Table 436 - FCC Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	95.7
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.19
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.14
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5500	21.720	16.15	15.27	-	-	18.74	24.00	-5.26
5600	21.060	16.21	14.87	-	-	18.60	24.00	-5.40
5700	21.780	14.70	13.57	-	-	17.18	24.00	-6.82
5720	15.500	15.42	15.08	-	-	18.27	22.90	-4.64

Table 437 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5500	19.020	16.15	15.27	-	-	18.74	23.79	-5.05	5.14	23.88	29.79	-5.91
5580	18.900	16.42	15.53	-	-	19.01	23.76	-4.76	5.14	24.15	29.76	-5.62
5700	19.020	14.70	13.57	-	-	17.18	23.79	-6.61	5.14	22.32	29.79	-7.47
5720	14.360	15.42	15.08	-	-	18.27	22.57	-4.31	5.14	23.41	28.57	-5.16

Table 438 - ISD Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	95.8
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.19
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.14
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5510	42.840	14.24	13.08	-	-	16.71	24.00	-7.29
5590	41.400	18.77	17.64	-	-	21.25	24.00	-2.75
5670	42.960	15.88	14.73	-	-	18.35	24.00	-5.65
5710	35.760	18.47	17.38	-	-	20.97	24.00	-3.03

Table 439 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5510	37.920	14.24	13.08	-	-	16.71	24.00	-7.29	5.14	21.85	30.00	-8.15
5550	37.800	18.84	17.69	-	-	21.31	24.00	-2.69	5.14	26.45	30.00	-3.55
5670	37.920	15.88	14.73	-	-	18.35	24.00	-5.65	5.14	23.49	30.00	-6.51
5710	33.600	18.47	17.38	-	-	20.97	24.00	-3.03	5.14	26.11	30.00	-3.89

Table 440 - ISD Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	95.3
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.21
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.14
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5530	84.260	12.74	11.63	-	-	15.23	24.00	-8.77
5610	83.600	18.67	17.56	-	-	21.16	24.00	-2.84
5690	75.920	19.73	18.35	-	-	22.11	24.00	-1.89

Table 441 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5530	77.000	12.74	11.63	-	-	15.23	24.00	-8.77	5.14	20.37	30.00	-9.63
5690	72.840	19.73	18.35	-	-	22.11	24.00	-1.89	5.14	27.25	30.00	-2.75

Table 442 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE160 SU	Duty Cycle (%):	92.7
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.14
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5570	165.480	11.97	10.93	-	-	14.49	24.00	-9.51

Table 443 - FCC Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	94.2
Modulation Coding Scheme:	MCS10	DCCF (dB):	0.26
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.18
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720	8.61	7.90	-	-	11.28	30.00	-18.72
5745	21.42	20.52	-	-	24.00	30.00	-6.00
5785	21.22	20.82	-	-	24.03	30.00	-5.97
5825	21.48	21.19	-	-	24.34	30.00	-5.66

Table 444 - Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	89.9
Modulation Coding Scheme:	MCS10	DCCF (dB):	0.46
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.18
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5710	6.85	5.94	-	-	9.43	30.00	-20.57
5755	21.44	20.76	-	-	24.13	30.00	-5.87
5795	21.35	21.01	-	-	24.19	30.00	-5.81

Table 445 - Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	84.3
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.74
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.14
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5690	4.39	3.35	-	-	6.91	30.00	-23.09
5775	19.86	19.47	-	-	22.68	30.00	-7.32

Table 446 - Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	95.9
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.18
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.18
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720	9.00	8.63	-	-	11.83	30.00	-18.17
5745	21.50	20.79	-	-	24.17	30.00	-5.83
5785	21.36	20.96	-	-	24.17	30.00	-5.83
5825	21.45	21.17	-	-	24.32	30.00	-5.68

Table 447 - Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	95.8
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.19
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.18
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5710	7.35	6.20	-	-	9.82	30.00	-20.18
5755	21.43	20.63	-	-	24.06	30.00	-5.94
5795	21.42	21.09	-	-	24.27	30.00	-5.73

Table 448 - Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	95.5
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.20
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.14
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5690	4.93	3.66	-	-	7.35	30.00	-22.65
5775	19.64	19.09	-	-	22.38	30.00	-7.62

Table 449 - Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE20 RU26	Duty Cycle (%):	97.0
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.13
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5180 (RU26.0)	6.97	8.34	-	-	10.72	24.00	-13.28
5220 (RU26.0)	7.04	8.36	-	-	10.76	24.00	-13.24
5240 (RU26.8)	7.60	8.46	-	-	11.06	24.00	-12.94

Table 450 - FCC Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	97.0
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.13
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5180 (RU52.37)	9.49	11.33	-	-	13.52	24.00	-10.48
5220 (RU52.37)	9.80	11.33	-	-	13.64	24.00	-10.36
5240 (RU52.40)	10.16	11.22	-	-	13.73	24.00	-10.27

Table 451 - FCC Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	97.8
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.13
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5180 (RU106.53)	13.40	14.28	-	-	16.87	24.00	-7.13
5220 (RU106.53)	12.55	14.48	-	-	16.63	24.00	-7.37
5240 (RU106.54)	13.39	14.19	-	-	16.82	24.00	-7.18

Table 452 - FCC Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE20 RU26	Duty Cycle (%):	96.9
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.13
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ				
5180 (RU26.0)	18.300	0.83	1.90	-	-	4.41	5.13	9.54	22.62	-13.09
5220 (RU26.0)	18.300	1.86	2.11	-	-	5.00	5.13	10.13	22.62	-12.50
5240 (RU26.8)	18.240	1.69	2.25	-	-	4.99	5.13	10.12	22.61	-12.49

Table 453 - ISED Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	97.0
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.13
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ				
5180 (RU52.37)	18.180	3.39	4.94	-	-	7.24	5.13	12.38	22.60	-10.22
5220 (RU52.37)	18.120	3.38	4.91	-	-	7.22	5.13	12.35	22.58	-10.23
5240 (RU52.40)	18.120	4.33	5.02	-	-	7.70	5.13	12.84	22.58	-9.75

Table 454 - ISED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	98.0
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.13
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ				
5180 (RU106.53)	18.060	5.98	7.94	-	-	10.08	5.13	15.21	22.57	-7.36
5220 (RU106.53)	18.120	6.40	8.06	-	-	10.32	5.13	15.45	22.58	-7.13
5240 (RU106.54)	18.180	7.14	8.05	-	-	10.63	5.13	15.76	22.60	-6.83

Table 455 - ISED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	97.1
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.49
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5260 (RU52.37)	19.860	10.81	11.32	-	-	14.08	23.98	-9.90
5300 (RU52.37)	19.920	11.47	11.40	-	-	14.45	23.99	-9.55
5320 (RU52.40)	19.740	10.85	10.05	-	-	13.48	23.95	-10.48

Table 456 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5260 (RU52.37)	18.120	10.81	11.32	-	-	14.08	23.58	-9.50	5.49	19.57	29.58	-10.01
5300 (RU52.37)	18.120	11.47	11.40	-	-	14.45	23.58	-9.14	5.49	19.94	29.58	-9.64
5320 (RU52.40)	18.120	10.85	10.05	-	-	13.48	23.58	-10.11	5.49	18.97	29.58	-10.61

Table 457 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	97.9
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.49
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5260 (RU106.53)	20.280	13.39	14.47	-	-	16.98	24.00	-7.02
5300 (RU106.53)	20.160	13.84	14.15	-	-	17.01	24.00	-6.99
5320 (RU106.54)	19.920	13.80	12.98	-	-	16.42	23.99	-7.57

Table 458 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5260 (RU106.53)	18.120	13.39	14.47	-	-	16.98	23.58	-6.61	5.49	22.47	29.58	-7.11
5300 (RU106.53)	18.120	13.84	14.15	-	-	17.01	23.58	-6.58	5.49	22.50	29.58	-7.08
5320 (RU106.54)	18.180	13.80	12.98	-	-	16.42	23.60	-7.18	5.49	21.91	29.60	-7.68

Table 459 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	96.9
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.14
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.14
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5500 (RU52.37)	19.860	11.36	10.56	-	-	13.99	23.98	-9.99
5600 (RU52.37)	20.040	11.42	10.64	-	-	14.05	24.00	-9.95
5700 (RU52.40)	19.740	10.35	9.61	-	-	13.01	23.95	-10.95
5720 (RU52.39)	14.120	10.89	10.80	-	-	13.86	22.50	-8.64

Table 460 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5500 (RU52.37)	18.180	11.36	10.56	-	-	13.99	23.60	-9.61	5.14	19.13	29.60	-10.47
5580 (RU52.37)	18.120	11.28	10.45	-	-	13.90	23.58	-9.68	5.14	19.04	29.58	-10.54
5700 (RU52.40)	18.060	10.35	9.61	-	-	13.01	23.57	-10.56	5.14	18.15	29.57	-11.42
5720 (RU52.39)	13.160	10.89	10.80	-	-	13.86	22.19	-8.33	5.14	19.00	28.19	-9.19

Table 461 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	97.8
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.10
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.14
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5500 (RU106.53)	20.280	14.36	14.00	-	-	17.19	24.00	-6.81
5600 (RU106.53)	20.280	14.50	14.09	-	-	17.31	24.00	-6.69
5700 (RU106.54)	19.860	14.49	13.71	-	-	17.13	23.98	-6.85
5720 (RU106.53)	15.620	14.21	14.02	-	-	17.13	22.94	-5.81

Table 462 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5500 (RU106.53)	18.120	14.36	14.00	-	-	17.19	23.58	-6.39	5.14	22.33	29.58	-7.25
5580 (RU106.53)	18.120	14.46	13.85	-	-	17.18	23.58	-6.40	5.14	22.32	29.58	-7.26
5700 (RU106.54)	18.180	14.49	13.71	-	-	17.13	23.60	-6.47	5.14	22.27	29.60	-7.33
5720 (RU106.53)	14.540	14.21	14.02	-	-	17.13	22.63	-5.50	5.14	22.27	28.63	-6.35

Table 463 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ax HE20 RU26	Duty Cycle (%):	97.3
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	-
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	4.31
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5745 (RU26.0)	13.29	12.29	-	-	15.83	30.00	-14.17
5785 (RU26.0)	13.22	12.92	-	-	16.08	30.00	-13.92
5825 (RU26.8)	13.20	13.00	-	-	16.11	30.00	-13.89

Table 464 - Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	97.0
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.13
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.18
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720 (RU52.40)	11.30	10.83	-	-	14.08	30.00	-15.92
5745 (RU52.37)	16.49	15.86	-	-	19.19	30.00	-10.81
5785 (RU52.37)	16.40	16.13	-	-	19.28	30.00	-10.72
5825 (RU52.40)	16.23	15.89	-	-	19.07	30.00	-10.93

Table 465 - Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)1)		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	97.9
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.09
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.18
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720 (RU106.54)	11.66	10.79	-	-	14.26	30.00	-15.74
5745 (RU106.53)	19.20	18.93	-	-	22.08	30.00	-7.92
5785 (RU106.53)	19.50	19.41	-	-	22.46	30.00	-7.54
5825 (RU106.54)	19.49	19.20	-	-	22.36	30.00	-7.64

Table 466 - Maximum Conducted (average) Output Power Results



TxBF

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ac VHT20	Duty Cycle (%):	90.8
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.10
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5180	13.95	13.97	-	-	16.97	21.90	-4.93
5220	13.71	13.98	-	-	16.86	21.90	-5.04
5240	13.91	13.74	-	-	16.84	21.90	-5.06

Table 467 - FCC Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ac VHT40	Duty Cycle (%):	95.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.10
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5190	13.65	13.49	-	-	16.58	21.90	-5.32
5230	16.63	16.60	-	-	19.63	21.90	-2.27

Table 468 - FCC Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	90.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.10
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5210	12.01	11.93	-	-	14.98	21.90	-6.92

Table 469 - FCC Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ac VHT20	Duty Cycle (%):	90.6
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.10
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ				
5180	17.820	6.81	7.00	-	-	9.92	8.10	18.02	22.51	-4.49
5220	17.700	6.87	6.92	-	-	9.91	8.10	18.01	22.48	-4.47
5240	17.700	7.06	7.05	-	-	10.07	8.10	18.17	22.48	-4.31

Table 470 - ISED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ac VHT40	Duty Cycle (%):	91.6
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.10
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ				
5190	36.480	9.49	9.53	-	-	12.52	8.10	20.62	23.00	-2.38
5230	36.300	9.38	9.68	-	-	12.54	8.10	20.64	23.00	-2.36

Table 471 - ISSED Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	89.5
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.10
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ				
5210	75.680	10.40	10.28	-	-	13.35	8.10	21.45	23.00	-1.55

Table 472 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ac VHT20	Duty Cycle (%):	95.3
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.46
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5260	20.580	13.72	13.72	-	-	16.73	21.54	-4.81
5300	20.340	13.70	13.16	-	-	16.45	21.54	-5.09
5320	20.460	13.77	12.80	-	-	16.28	21.54	-5.26

Table 473 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5260	17.700	13.72	13.72	-	-	16.73	23.48	-6.75	8.46	25.19	29.48	-4.29
5300	17.700	13.70	13.16	-	-	16.45	23.48	-7.03	8.46	24.91	29.48	-4.57
5320	17.820	13.77	12.80	-	-	16.28	23.51	-7.23	8.46	24.74	29.51	-4.77

Table 474 - ISED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ac VHT40	Duty Cycle (%):	95.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.46
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5270	41.100	16.30	15.93	-	-	19.13	21.54	-2.41
5310	42.120	14.45	13.74	-	-	17.12	21.54	-4.42

Table 475 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5270	36.400	16.30	15.93	-	-	19.13	24.00	-4.87	8.46	27.59	30.00	-2.41
5310	36.480	14.45	13.74	-	-	17.12	24.00	-6.88	8.46	25.58	30.00	-4.42

Table 476 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	93.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.46
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5290	80.960	12.14	11.57	-	-	14.87	21.54	-6.67

Table 477 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5290	75.680	12.14	11.57	-	-	14.87	24.00	-9.13	8.46	23.33	30.00	-6.67

Table 478 - ISED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT20	Duty Cycle (%):	94.6
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.13
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5500	21.780	13.96	12.65	-	-	16.36	21.87	-5.51
5600	21.000	14.03	12.37	-	-	16.29	21.87	-5.58
5700	20.580	13.78	12.42	-	-	16.16	21.87	-5.71
5720	15.140	12.97	12.17	-	-	15.60	20.67	-5.07

Table 479 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5500	17.820	13.96	12.65	-	-	16.36	23.51	-7.15	8.13	24.49	29.51	-5.02
5580	17.700	14.18	12.57	-	-	16.46	23.48	-7.02	8.13	24.59	29.48	-4.89
5700	17.760	13.78	12.42	-	-	16.16	23.49	-7.33	8.13	24.29	29.49	-5.20
5720	13.760	12.97	12.17	-	-	15.60	22.39	-6.79	8.13	23.73	28.39	-4.66

Table 480 - ISD Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		

DUT Configuration			
Mode:	802.11ac VHT40	Duty Cycle (%):	92.6
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.13
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5510	42.240	12.73	11.27	-	-	15.07	21.87	-6.80
5590	41.000	16.74	15.33	-	-	19.10	21.87	-2.77
5670	43.920	16.46	14.91	-	-	18.76	21.87	-3.11
5710	35.400	16.15	15.52	-	-	18.86	21.87	-3.01

Table 481 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5510	36.480	12.73	11.27	-	-	15.07	24.00	-8.93	8.13	23.20	30.00	-6.80
5550	36.300	16.74	15.33	-	-	19.10	24.00	-4.85	8.13	27.28	30.00	-2.72
5670	36.600	16.46	14.91	-	-	18.76	24.00	-5.24	8.13	26.89	30.00	-3.11
5710	32.100	16.15	15.52	-	-	18.86	24.00	-5.14	8.13	26.99	30.00	-3.01

Table 482 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d(i), 662911 D01 v02r01 E)1)		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	90.5
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.13
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Minimum 26 dB Bandwidth (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
		A	B	C	D	Σ		
5530	80.740	12.17	10.83	-	-	14.56	21.87	-7.31
5610	81.840	17.46	15.70	-	-	19.68	21.87	-2.19
5690	75.260	17.55	16.41	-	-	20.03	21.87	-1.84

Table 483 - FCC Maximum Conducted (average) Output Power Results

Test Frequency (MHz)	Minimum 99% OBW (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
		A	B	C	D	Σ						
5530	75.900	12.17	10.83	-	-	14.56	24.00	-9.44	8.13	22.69	30.00	-7.31
5690	72.180	17.55	16.41	-	-	20.03	24.00	-3.97	8.13	28.16	30.00	-1.84

Table 484 - ISSED Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT20	Duty Cycle (%):	93.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.18
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720	6.16	4.03	-	-	8.23	27.82	-19.59
5745	21.13	20.37	-	-	23.78	28.68	-4.90
5785	21.36	20.66	-	-	24.03	28.68	-4.65
5825	21.32	20.80	-	-	24.08	28.68	-4.60

Table 485 - Maximum Conducted (average) Output Power Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.4.3.2
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT40	Duty Cycle (%):	92.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.18
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5710	4.41	4.01	-	-	7.22	27.82	-20.60
5755	21.34	20.46	-	-	23.93	28.68	-4.75
5795	21.29	20.83	-	-	24.08	28.68	-4.60

Table 486 - Maximum Conducted (average) Output Power Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)1)		
Note(s):	Straddle channel power was measured using the appropriate SA test method. DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	92.5
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	-
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.13
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5690	2.92	4.00	-	-	6.50	27.87	-21.37
5775	18.73	17.90	-	-	21.35	28.68	-7.33

Table 487 - Maximum Conducted (average) Output Power Results



FCC 47 CFR Part 15E, Limit Clause 15.407(a)

Condition of Operation	Frequency Range (MHz)			
	5150-5250	5250-5350	5470-5725	5725-5850
Max Conducted TX Power	30 dBm (1W) for master device 24 dBm (250 mW) for client device	24 dBm (250 mW) or 11 dBm + 10 Log B, whichever is lower (B = 26 dB emission BW)		30 dBm (1 W)
Max EIRP	4W (36 dBm) with 6 dBi antenna 200 W (53 dBm) for fixed P-t-P application with 23 dBi antenna Additional rule for outdoor operation: Max_EIRP < 125 mW (21 dBm) at any elevation angle > 30° from horizon.	1 W (30 dBm) with 6 dBi antenna		4 W (36 dBm) with 6 dBi antenna. No EIRP limit for fixed P-t-P application (i.e., no antenna gain limit)

Table 488

ISED RSS-247, Limit Clause 6.2.1.1, 6.2.2.1, 6.2.3.1, 6.2.4.1 and 6.2.5.2

Device	Frequency Range (MHz)				
	5150-5250	5250-5350	5470-5725	5725-5850	5850-5895
OEM installed in vehicles	30 mW or 1.76 + 10 log ₁₀ B, dBm (EIRP); whichever is less	30 mW or 1.76 + 10 log ₁₀ B, dBm (EIRP); whichever is less	-	-	-
Other	200 mW or 10 + 10log ₁₀ B dBm (EIRP); whichever is less	250 mW or 11 + 10 log ₁₀ B); whichever is less 1.0 W or 17 + 10log ₁₀ B dBm EIRP; whichever is less	250 mW or 11 + 10 log ₁₀ B); whichever is less 1.0 W or 17 + 10log ₁₀ B dBm EIRP; whichever is less	1W 4W EIRP	Fixed Outdoor Access Point: 4 W EIRP Fixed Outdoor Client: 1 W EIRP Indoor Access Point: 4 W EIRP Indoor subordinate: 4 W EIRP Indoor Client: 1 W EIRP

Table 489



2.3.7 Test Location and Test Equipment Used

This test was carried out in RF Chamber 18 and RF Laboratory 14.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
Hygrometer	Rotronic	I-1000	3068	12	07-Nov-2024
1800-6000 MHz Power Splitter	Mini-Circuits	ZN2PD-63-S+	4055	-	O/P Mon
AC Programmable Power Supply	iTech	IT7324	5225	-	O/P Mon
Attenuator 5W 30dB DC-18GHz	Aaren	AT40A-4041-D18-30	5505	12	22-Feb-2025
2-Way Power Divider (2-8 GHz)	Aaren	AT30A-TE0208-2-AF	5685	12	02-Jan-2025
USB Power Sensor	Boonton	RTP5008	5820	12	07-Feb-2025
USB Power Sensor	Boonton	RTP5008	5821	12	07-Feb-2025
Digital Multimeter	Fluke	115	6145	12	06-Jun-2025
Cable (SMA to SMA 1m)	Junkosha	MWX221/B	6305	12	20-May-2025
Signal Conditioning Unit	TUV SUD	SPECTRUM_SCU001	6426	12	07-Feb-2025
Directional Coupler 2-8GHz	RF-Lambda	RFDC2G8G10	6447	-	O/P Mon
Directional Coupler 2-8GHz	RF-Lambda	RFDC2G8G10	6448	-	O/P Mon
Signal Conditioning Unit	TUV SUD	SPECTRUM_SCU001	6517	12	22-Feb-2025
Signal Conditioning Unit	TUV SUD	SPECTRUM_SCU001	6518	12	16-Feb-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6526	12	22-Feb-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6527	12	05-Mar-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6529	12	16-Feb-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6530	12	16-Feb-2025
USB Wideband Power Sensor	Boonton	RTP5008	6585	12	20-Feb-2025
USB Wideband Power Sensor	Boonton	RTP5008	6586	12	20-Feb-2025
USB Wideband Power Sensor	Boonton	RTP5008	6587	12	13-Feb-2025
USB Wideband Power Sensor	Boonton	RTP5008	6588	12	13-Feb-2025
AC Programmable Power Supply	iTech	IT7324	6662	-	O/P Mon
AC Programmable Power Supply	iTech	IT7324	6665	-	O/P Mon
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6752	12	06-Feb-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6753	12	06-Feb-2025

Table 490

O/P Mon - Output Monitored using calibrated equipment



2.4 Maximum Conducted Power Spectral Density

2.4.1 Specification Reference

FCC 47 CFR Part 15E, Clause 15.407 (a)
ISED RSS-247, Clause 6.2

2.4.2 Equipment Under Test and Modification State

A3137, S/N: H6D001F73D - Modification State 0
A3137, S/N: G5022YM6RR - Modification State 0
A3137, S/N: MHCWWV5343 - Modification State 0

2.4.3 Date of Test

20-June-2024 to 19-July-2024

2.4.4 Test Method

The test was performed in accordance with ANSI C63.10 2020 clause 12.6 for FCC and ISSED measurements.

Where the EUT duty cycle was < 98 % and repeatable within 2 %, the spectrum analyser was set to trace (power) averaging and a duty cycle correction was added as calculated in the result tables below (Method SA-2). Where the duty cycle was ≥ 98 % the spectrum analyser was set to trace (power) averaging and no duty cycle correction made (Method SA-1). In all other cases the spectrum analyser trace was set to max hold (Method SA-3).

Results for the U-NII-3 band were measured in a narrower bandwidth and integrated over 500 kHz using the spectrum analysers channel power integration function.

The output power was verified as being the same from each transmit core (within negligible tolerances), but the antenna gains were not identical. Therefore, the modes reported for SISO or 2TX MIMO operation are those giving the highest EIRP and/or lowest conducted limit based on the combination of antennas giving highest total directional gain.

MIMO output port summing was performed in accordance with KDB 662911 D01:

For the CDD results the Directional Gain was calculated in accordance with the equation given in clause F)2)f)(ii) summed for a single spatial stream.

For SDM modes Directional Gain was calculated in accordance with clause F)2)d)(ii).

For transmit beamforming (TxBF) mode it was calculated in accordance with clause F)2)d)(i).

2.4.5 Environmental Conditions

Ambient Temperature	21.5 - 25.6 °C
Relative Humidity	44.5 - 56.9 %



2.4.6 Test Results

5 GHz WLAN

SISO

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11a	Duty Cycle (%):	97.5
Data Rate:	12 Mbps	DCCF (dB):	0.11
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	5.90
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5180	-	7.49	-	-	7.49	11.00	-3.51
5220	-	9.17	-	-	9.17	11.00	-1.83
5240	-	9.03	-	-	9.03	11.00	-1.97

Table 491 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	96.4
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.16
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	5.90
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5180	-	6.69	-	-	6.69	11.00	-4.31
5220	-	8.54	-	-	8.54	11.00	-2.46
5240	-	8.78	-	-	8.78	11.00	-2.22

Table 492 - FCC Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	93.7
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.28
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	5.90
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5190	-	1.70	-	-	1.70	11.00	-9.30
5230	-	8.17	-	-	8.17	11.00	-2.83

Table 493 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	88.5
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.53
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	5.90
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5210	-	-2.16	-	-	-2.16	11.00	-13.16

Table 494 - FCC Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT160	Duty Cycle (%):	84.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.76
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	5.90
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250	-	-8.01	-	-	-8.01	11.00	-19.01

Table 495 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	95.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.19
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	5.90
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5180	-	6.40	-	-	6.40	11.00	-4.60
5220	-	8.61	-	-	8.61	11.00	-2.39
5240	-	8.47	-	-	8.47	11.00	-2.53

Table 496 - FCC Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	95.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.19
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	5.90
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5190	-	0.99	-	-	0.99	11.00	-10.01
5230	-	7.72	-	-	7.72	11.00	-3.28

Table 497 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	95.3
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.21
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	5.90
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5210	-	-2.21	-	-	-2.21	11.00	-13.21

Table 498 - FCC Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU	Duty Cycle (%):	92.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.33
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	5.90
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250	-	-8.34	-	-	-8.34	11.00	-19.34

Table 499 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11a	Duty Cycle (%):	97.6
Data Rate:	12 Mbps	DCCF (dB):	0.10
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	5.90
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5180	-	1.98	-	-	1.98	5.90	7.88	10.00	-2.12
5220	-	2.18	-	-	2.18	5.90	8.08	10.00	-1.92
5240	-	2.20	-	-	2.20	5.90	8.10	10.00	-1.90

Table 500 - ISED Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	96.6
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.15
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	5.90
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5180	-	1.82	-	-	1.82	5.90	7.72	10.00	-2.28
5220	-	1.99	-	-	1.99	5.90	7.89	10.00	-2.11
5240	-	1.92	-	-	1.92	5.90	7.82	10.00	-2.18

Table 501 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	93.7
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.28
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	5.90
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5190	-	1.50	-	-	1.50	5.90	7.40	10.00	-2.60
5230	-	1.53	-	-	1.53	5.90	7.43	10.00	-2.57

Table 502 - ISED Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	88.5
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.53
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	5.90
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5210	-	-2.21	-	-	-2.21	5.90	3.69	10.00	-6.31

Table 503 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT160	Duty Cycle (%):	84.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.76
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	5.90
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5250	-	-7.76	-	-	-7.76	5.90	-1.86	10.00	-11.86

Table 504 - ISED Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	95.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.19
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	5.90
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5180	-	1.77	-	-	1.77	5.90	7.67	10.00	-2.33
5220	-	1.97	-	-	1.97	5.90	7.87	10.00	-2.13
5240	-	1.82	-	-	1.82	5.90	7.72	10.00	-2.28

Table 505 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	95.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.19
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	5.90
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5190	-	1.48	-	-	1.48	5.90	7.38	10.00	-2.62
5230	-	1.40	-	-	1.40	5.90	7.30	10.00	-2.70

Table 506 - ISED Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	95.3
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.21
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	5.90
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5210	-	-2.04	-	-	-2.04	5.90	3.86	10.00	-6.14

Table 507 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU	Duty Cycle (%):	92.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.33
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	5.90
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5250	-	-8.48	-	-	-8.48	5.90	-2.58	10.00	-12.58

Table 508 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11a	Duty Cycle (%):	97.5
Data Rate:	12 Mbps	DCCF (dB):	0.11
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.30
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260	-	8.41	-	-	8.41	10.70	-2.29
5300	-	8.94	-	-	8.94	10.70	-1.76
5320	-	8.44	-	-	8.44	10.70	-2.26

Table 509 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260	-	8.41	-	-	8.41	11.00	-2.59
5300	-	8.94	-	-	8.94	11.00	-2.06
5320	-	8.44	-	-	8.44	11.00	-2.56

Table 510 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	96.4
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.16
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.30
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260	-	8.34	-	-	8.34	10.70	-2.36
5300	-	8.87	-	-	8.87	10.70	-1.83
5320	-	8.55	-	-	8.55	10.70	-2.15

Table 511 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260	-	8.34	-	-	8.34	11.00	-2.66
5300	-	8.87	-	-	8.87	11.00	-2.13
5320	-	8.55	-	-	8.55	11.00	-2.45

Table 512 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	93.7
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.28
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.30
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5270	-	8.13	-	-	8.13	10.70	-2.57
5310	-	1.62	-	-	1.62	10.70	-9.08

Table 513 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5270	-	8.13	-	-	8.13	11.00	-2.87
5310	-	1.62	-	-	1.62	11.00	-9.38

Table 514 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	88.5
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.53
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.30
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5290	-	-1.61	-	-	-1.61	10.70	-12.31

Table 515 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5290	-	-1.61	-	-	-1.61	11.00	-12.61

Table 516 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT160	Duty Cycle (%):	84.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.76
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.30
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250	-	-7.79	-	-	-7.79	10.70	-18.49

Table 517 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250	-	-7.45	-	-	-7.45	11.00	-18.45

Table 518 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	95.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.19
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.30
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260	-	8.18	-	-	8.18	10.70	-2.52
5300	-	8.37	-	-	8.37	10.70	-2.33
5320	-	7.59	-	-	7.59	10.70	-3.11

Table 519 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260	-	8.18	-	-	8.18	11.00	-2.82
5300	-	8.37	-	-	8.37	11.00	-2.63
5320	-	7.59	-	-	7.59	11.00	-3.41

Table 520 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	95.6
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.19
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.30
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5270	-	7.97	-	-	7.97	10.70	-2.73
5310	-	0.95	-	-	0.95	10.70	-9.75

Table 521 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5270	-	7.97	-	-	7.97	11.00	-3.03
5310	-	0.95	-	-	0.95	11.00	-10.05

Table 522 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	95.3
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.21
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.30
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5290	-	-2.10	-	-	-2.10	10.70	-12.80

Table 523 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5290	-	-2.10	-	-	-2.10	11.00	-13.10

Table 524 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU	Duty Cycle (%):	92.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.33
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.30
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250	-	-8.11	-	-	-8.11	10.70	-18.81

Table 525 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250	-	-8.77	-	-	-8.77	11.00	-19.77

Table 526 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11a	Duty Cycle (%):	97.5
Data Rate:	12 Mbps	DCCF (dB):	0.11
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	5.70
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500	-	6.58	-	-	6.58	11.00	-4.42
5580	-	9.24	-	-	9.24	11.00	-1.76
5600	-	9.24	-	-	9.24	11.00	-1.76
5700	-	5.39	-	-	5.39	11.00	-5.61
5720	-	9.32	-	-	9.32	11.00	-1.68

Table 527 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	96.4
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.16
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	5.70
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500	-	6.99	-	-	6.99	11.00	-4.01
5580	-	9.13	-	-	9.13	11.00	-1.87
5600	-	8.92	-	-	8.92	11.00	-2.08
5700	-	5.72	-	-	5.72	11.00	-5.28
5720	-	9.16	-	-	9.16	11.00	-1.84

Table 528 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	93.7
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.28
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	5.70
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5510	-	2.17	-	-	2.17	11.00	-8.83
5550	-	6.80	-	-	6.80	11.00	-4.20
5590	-	8.20	-	-	8.20	11.00	-2.80
5670	-	4.18	-	-	4.18	11.00	-6.82
5710	-	8.49	-	-	8.49	11.00	-2.51

Table 529 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	88.5
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.53
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	5.70
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5530	-	-0.95	-	-	-0.95	11.00	-11.95
5610	-	3.77	-	-	3.77	11.00	-7.23
5690	-	5.32	-	-	5.32	11.00	-5.68

Table 530 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT160	Duty Cycle (%):	84.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.75
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	5.70
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570	-	-5.07	-	-	-5.07	11.00	-16.07

Table 531 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	95.6
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.19
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	5.70
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500	-	6.36	-	-	6.36	11.00	-4.64
5580	-	9.14	-	-	9.14	11.00	-1.86
5600	-	9.17	-	-	9.17	11.00	-1.83
5700	-	4.54	-	-	4.54	11.00	-6.46
5720	-	8.76	-	-	8.76	11.00	-2.24

Table 532 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	95.6
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.19
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	5.70
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5510	-	1.72	-	-	1.72	11.00	-9.28
5550	-	6.21	-	-	6.21	11.00	-4.79
5590	-	8.19	-	-	8.19	11.00	-2.81
5670	-	2.95	-	-	2.95	11.00	-8.05
5710	-	8.05	-	-	8.05	11.00	-2.95

Table 533 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	95.3
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.21
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	5.70
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5530	-	-1.84	-	-	-1.84	11.00	-12.84
5610	-	3.83	-	-	3.83	11.00	-7.17
5690	-	5.17	-	-	5.17	11.00	-5.83

Table 534 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU	Duty Cycle (%):	92.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.33
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	5.70
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570	-	-5.70	-	-	-5.70	11.00	-16.70

Table 535 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11a	Duty Cycle (%):	97.6
Data Rate:	12 Mbps	DCCF (dB):	0.10
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	4.60
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720	4.16	-	-	-	4.16	30.00	-25.84
5745	8.81	-	-	-	8.81	30.00	-21.19
5785	8.48	-	-	-	8.48	30.00	-21.52
5825	8.55	-	-	-	8.55	30.00	-21.45

Table 536 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	96.8
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.14
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	4.60
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720	4.22	-	-	-	4.22	30.00	-25.78
5745	8.22	-	-	-	8.22	30.00	-21.78
5785	8.06	-	-	-	8.06	30.00	-21.94
5825	7.96	-	-	-	7.96	30.00	-22.04

Table 537 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	93.9
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.27
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	4.60
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5710	2.24	-	-	-	2.24	30.00	-27.76
5755	5.29	-	-	-	5.29	30.00	-24.71
5795	4.99	-	-	-	4.99	30.00	-25.01

Table 538 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	89.2
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.50
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	4.60
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5690	-1.61	-	-	-	-1.61	30.00	-31.61
5775	0.65	-	-	-	0.65	30.00	-29.35

Table 539 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	96.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.18
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	4.60
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720	3.97	-	-	-	3.97	30.00	-26.03
5745	8.29	-	-	-	8.29	30.00	-21.71
5785	8.00	-	-	-	8.00	30.00	-22.00
5825	7.65	-	-	-	7.65	30.00	-22.35

Table 540 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	95.8
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.19
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	4.60
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5710	1.89	-	-	-	1.89	30.00	-28.11
5755	4.90	-	-	-	4.90	30.00	-25.10
5795	5.30	-	-	-	5.30	30.00	-24.70

Table 541 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	95.6
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.20
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	4.60
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5690	-1.33	-	-	-	-1.33	30.00	-31.33
5775	0.44	-	-	-	0.44	30.00	-29.56

Table 542 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU26	Duty Cycle (%):	97.3
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.12
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	5.90
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5180 (RU26.0)	-	8.28	-	-	8.28	11.00	-2.72
5220 (RU26.0)	-	8.64	-	-	8.64	11.00	-2.36
5240 (RU26.8)	-	8.85	-	-	8.85	11.00	-2.15

Table 543 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	97.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.13
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	5.90
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5180 (RU52.37)	-	8.52	-	-	8.52	11.00	-2.48
5220 (RU52.37)	-	8.64	-	-	8.64	11.00	-2.36
5240 (RU52.40)	-	8.51	-	-	8.51	11.00	-2.49

Table 544 - FCC Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.10
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	5.90
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5180 (RU106.53)	-	8.59	-	-	8.59	11.00	-2.41
5220 (RU106.53)	-	8.79	-	-	8.79	11.00	-2.21
5240 (RU106.54)	-	8.72	-	-	8.72	11.00	-2.28

Table 545 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU26	Duty Cycle (%):	97.2
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.12
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	5.90
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5180 (RU26.0)	-	1.56	-	-	1.56	5.90	7.46	10.00	-2.54
5220 (RU26.0)	-	1.81	-	-	1.81	5.90	7.71	10.00	-2.29
5240 (RU26.8)	-	1.05	-	-	1.05	5.90	6.95	10.00	-3.05

Table 546 - ISED Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	96.9
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.14
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	5.90
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5180 (RU52.37)	-	1.76	-	-	1.76	5.90	7.66	10.00	-2.34
5220 (RU52.37)	-	1.72	-	-	1.72	5.90	7.62	10.00	-2.38
5240 (RU52.40)	-	1.78	-	-	1.78	5.90	7.68	10.00	-2.32

Table 547 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	97.9
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.09
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	5.90
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5180 (RU106.53)	-	2.08	-	-	2.08	5.90	7.98	10.00	-2.02
5220 (RU106.53)	-	1.86	-	-	1.86	5.90	7.76	10.00	-2.24
5240 (RU106.54)	-	1.84	-	-	1.84	5.90	7.74	10.00	-2.26

Table 548 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	97.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.13
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.30
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260 (RU52.37)	-	8.30	-	-	8.30	10.70	-2.40
5300 (RU52.37)	-	8.60	-	-	8.60	10.70	-2.10
5320 (RU52.40)	-	7.54	-	-	7.54	10.70	-3.16

Table 549 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260 (RU52.37)	-	8.30	-	-	8.30	11.00	-2.70
5300 (RU52.37)	-	8.60	-	-	8.60	11.00	-2.40
5320 (RU52.40)	-	7.54	-	-	7.54	11.00	-3.46

Table 550 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.10
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	6.30
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260 (RU106.53)	-	8.36	-	-	8.36	10.70	-2.34
5300 (RU106.53)	-	8.27	-	-	8.27	10.70	-2.43
5320 (RU106.54)	-	6.54	-	-	6.54	10.70	-4.16

Table 551 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260 (RU106.53)	-	8.36	-	-	8.36	11.00	-2.64
5300 (RU106.53)	-	8.27	-	-	8.27	11.00	-2.73
5320 (RU106.54)	-	6.54	-	-	6.54	11.00	-4.46

Table 552 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	96.9
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.14
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	5.70
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500 (RU52.37)	-	8.86	-	-	8.86	11.00	-2.14
5580 (RU52.37)	-	9.27	-	-	9.27	11.00	-1.73
5600 (RU52.37)	-	8.91	-	-	8.91	11.00	-2.09
5700 (RU52.40)	-	6.79	-	-	6.79	11.00	-4.21
5720 (RU52.39)	-	8.85	-	-	8.85	11.00	-2.15

Table 553 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	97.8
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.10
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	5.70
Active Port(s):	B (Core 1)	Active Chain(s):	1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500 (RU106.53)	-	7.78	-	-	7.78	11.00	-3.22
5580 (RU106.53)	-	9.29	-	-	9.29	11.00	-1.71
5600 (RU106.53)	-	9.07	-	-	9.07	11.00	-1.93
5700 (RU106.54)	-	6.82	-	-	6.82	11.00	-4.18
5720 (RU106.53)	-	8.96	-	-	8.96	11.00	-2.04

Table 554 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU26	Duty Cycle (%):	97.2
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.12
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	4.60
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5745 (RU26.0)	7.59	-	-	-	7.59	30.00	-22.41
5785 (RU26.0)	7.74	-	-	-	7.74	30.00	-22.26
5825 (RU26.8)	7.88	-	-	-	7.88	30.00	-22.12

Table 555 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	97.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.13
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	4.60
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720 (RU52.40)	5.95	-	-	-	5.95	30.00	-24.05
5745 (RU52.37)	7.98	-	-	-	7.98	30.00	-22.02
5785 (RU52.37)	7.82	-	-	-	7.82	30.00	-22.18
5825 (RU52.40)	7.51	-	-	-	7.51	30.00	-22.49

Table 556 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	98.2
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.08
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	4.60
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720 (RU106.54)	6.30	-	-	-	6.30	30.00	-23.70
5745 (RU106.53)	7.97	-	-	-	7.97	30.00	-22.03
5785 (RU106.53)	8.08	-	-	-	8.08	30.00	-21.92
5825 (RU106.54)	7.97	-	-	-	7.97	30.00	-22.03

Table 557 - Maximum Power Spectral Density Results



MIMO CDD

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	96.5
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.16
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.10
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5180	1.86	3.52	-	-	5.78	8.90	-3.12
5220	2.47	3.86	-	-	6.23	8.90	-2.67
5240	2.59	3.67	-	-	6.18	8.90	-2.72

Table 558 - FCC Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	93.7
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.28
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.10
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5190	-0.09	1.49	-	-	3.78	8.90	-5.12
5230	2.24	3.49	-	-	5.92	8.90	-2.98

Table 559 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	88.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.54
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.10
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5210	-3.49	-2.21	-	-	0.21	8.90	-8.69

Table 560 - FCC Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT160	Duty Cycle (%):	84.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.76
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.10
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250	-9.10	-8.73	-	-	-5.90	8.90	-14.80

Table 561 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	96.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.18
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.10
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5180	1.50	3.43	-	-	5.58	8.90	-3.32
5220	2.58	3.64	-	-	6.15	8.90	-2.75
5240	2.57	3.46	-	-	6.05	8.90	-2.85

Table 562 - FCC Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	95.9
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.18
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.10
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5190	-0.93	0.77	-	-	3.01	8.90	-5.88
5230	2.16	3.30	-	-	5.78	8.90	-3.12

Table 563 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	95.2
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.21
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.10
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5210	-3.85	-2.41	-	-	-0.06	8.90	-8.96

Table 564 - FCC Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU	Duty Cycle (%):	92.8
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.32
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.10
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250	-9.73	-8.83	-	-	-6.25	8.90	-15.15

Table 565 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	96.7
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.15
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.10
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5180	-4.79	-3.62	-	-	-1.15	8.10	6.95	10.00	-3.05
5220	-4.33	-3.07	-	-	-0.65	8.10	7.46	10.00	-2.54
5240	-4.31	-3.23	-	-	-0.73	8.10	7.38	10.00	-2.62

Table 566 - ISED Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	94.0
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.27
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.10
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5190	-5.31	-4.04	-	-	-1.62	8.10	6.48	10.00	-3.52
5230	-4.92	-3.69	-	-	-1.25	8.10	6.85	10.00	-3.15

Table 567 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	88.6
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.53
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.10
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5210	-4.71	-3.35	-	-	-0.97	8.10	7.14	10.00	-2.86

Table 568 - ISED Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT160	Duty Cycle (%):	84.3
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.74
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.10
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5250	-8.87	-8.00	-	-	-5.40	8.10	2.70	10.00	-7.30

Table 569 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	95.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.19
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.10
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5180	-5.36	-3.57	-	-	-1.36	8.10	6.74	10.00	-3.26
5220	-4.91	-3.57	-	-	-1.18	8.10	6.92	10.00	-3.08
5240	-4.68	-3.78	-	-	-1.20	8.10	6.90	10.00	-3.10

Table 570 - ISED Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	95.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.19
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.10
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5190	-5.49	-3.64	-	-	-1.45	8.10	6.65	10.00	-3.35
5230	-4.99	-3.73	-	-	-1.30	8.10	6.80	10.00	-3.20

Table 571 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	95.5
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.20
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.10
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5210	-5.04	-3.66	-	-	-1.28	8.10	6.82	10.00	-3.18

Table 572 - ISED Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU	Duty Cycle (%):	92.8
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.32
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.10
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5250	-10.12	-8.89	-	-	-6.45	8.10	1.65	10.00	-8.35

Table 573 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	96.5
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.15
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.46
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260	2.88	3.36	-	-	6.13	8.54	-2.41
5300	3.54	3.61	-	-	6.59	8.54	-1.95
5320	3.78	2.92	-	-	6.38	8.54	-2.16

Table 574 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260	2.88	3.36	-	-	6.13	11.00	-4.87
5300	3.54	3.61	-	-	6.59	11.00	-4.41
5320	3.78	2.92	-	-	6.38	11.00	-4.62

Table 575 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	93.6
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.29
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.46
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5270	2.69	3.21	-	-	5.97	8.54	-2.57
5310	0.48	-0.21	-	-	3.16	8.54	-5.38

Table 576 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5270	2.69	3.21	-	-	5.97	11.00	-5.03
5310	0.48	-0.21	-	-	3.16	11.00	-7.84

Table 577 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	88.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.54
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.46
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5290	-2.41	-2.28	-	-	0.67	8.54	-7.88

Table 578 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5290	-2.41	-2.28	-	-	0.67	11.00	-10.33

Table 579 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT160	Duty Cycle (%):	84.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.76
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.46
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250	-8.76	-8.00	-	-	-5.36	8.54	-13.90

Table 580 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250	-8.74	-8.44	-	-	-5.58	11.00	-16.58

Table 581 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	95.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.19
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.46
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260	2.76	3.45	-	-	6.13	8.54	-2.41
5300	3.43	3.35	-	-	6.40	8.54	-2.14
5320	3.20	2.55	-	-	5.90	8.54	-2.64

Table 582 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260	2.76	3.45	-	-	6.13	11.00	-4.87
5300	3.43	3.35	-	-	6.40	11.00	-4.60
5320	3.20	2.55	-	-	5.90	11.00	-5.10

Table 583 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	95.6
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.19
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.46
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5270	2.87	3.16	-	-	6.02	8.54	-2.52
5310	-0.93	-1.57	-	-	1.77	8.54	-6.77

Table 584 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5270	2.87	3.16	-	-	6.02	11.00	-4.98
5310	-0.93	-1.57	-	-	1.77	11.00	-9.23

Table 585 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	95.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.19
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.46
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5290	-2.83	-2.90	-	-	0.15	8.54	-8.39

Table 586 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5290	-2.83	-2.90	-	-	0.15	11.00	-10.85

Table 587 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU	Duty Cycle (%):	92.8
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.32
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.46
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250	-9.54	-8.59	-	-	-6.03	8.54	-14.57

Table 588 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250	-9.53	-8.60	-	-	-6.03	11.00	-17.03

Table 589 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	96.5
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.15
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.13
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500	4.03	2.84	-	-	6.48	8.87	-2.38
5600	3.60	2.66	-	-	6.17	8.87	-2.70
5700	3.90	2.36	-	-	6.21	8.87	-2.66
5720	3.84	3.22	-	-	6.55	8.87	-2.32

Table 590 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500	4.03	2.84	-	-	6.48	11.00	-4.52
5580	4.40	3.21	-	-	6.85	11.00	-4.15
5700	3.90	2.36	-	-	6.21	11.00	-4.79
5720	3.84	3.22	-	-	6.55	11.00	-4.45

Table 591 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	93.8
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.28
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.13
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5510	1.92	0.93	-	-	4.46	8.87	-4.41
5590	3.56	2.59	-	-	6.11	8.87	-2.76
5670	3.43	1.99	-	-	5.78	8.87	-3.09
5710	3.37	2.52	-	-	5.98	8.87	-2.89

Table 592 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5510	1.92	0.93	-	-	4.46	11.00	-6.54
5550	3.32	2.62	-	-	6.00	11.00	-5.00
5670	3.43	1.99	-	-	5.78	11.00	-5.22
5710	3.37	2.52	-	-	5.98	11.00	-5.02

Table 593 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	88.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.53
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.13
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5530	-2.27	-3.11	-	-	0.34	8.87	-8.53
5610	3.88	2.65	-	-	6.32	8.87	-2.55
5690	3.88	2.40	-	-	6.21	8.87	-2.66

Table 594 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5530	-2.27	-3.11	-	-	0.34	11.00	-10.66
5690	3.88	2.40	-	-	6.21	11.00	-4.79

Table 595 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT160	Duty Cycle (%):	83.9
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.76
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.13
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570	-5.65	-6.74	-	-	-3.15	8.87	-12.02

Table 596 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	95.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.19
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.13
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500	4.00	2.80	-	-	6.45	8.87	-2.42
5600	3.40	2.43	-	-	5.95	8.87	-2.92
5700	3.24	2.34	-	-	5.82	8.87	-3.05
5720	3.69	2.79	-	-	6.27	8.87	-2.60

Table 597 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500	4.00	2.80	-	-	6.45	11.00	-4.55
5580	3.78	2.67	-	-	6.27	11.00	-4.73
5700	3.24	2.34	-	-	5.82	11.00	-5.18
5720	3.69	2.79	-	-	6.27	11.00	-4.73

Table 598 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	95.8
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.19
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.13
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5510	0.93	-0.23	-	-	3.40	8.87	-5.47
5590	3.41	2.75	-	-	6.11	8.87	-2.76
5670	3.11	1.76	-	-	5.50	8.87	-3.37
5710	3.54	2.47	-	-	6.05	8.87	-2.82

Table 599 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5510	0.93	-0.23	-	-	3.40	11.00	-7.60
5550	3.01	2.49	-	-	5.77	11.00	-5.23
5670	3.11	1.76	-	-	5.50	11.00	-5.50
5710	3.54	2.47	-	-	6.05	11.00	-4.95

Table 600 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	95.3
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.21
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.13
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5530	-3.44	-4.54	-	-	-0.95	8.87	-9.82
5610	3.61	2.36	-	-	6.04	8.87	-2.83
5690	3.88	2.23	-	-	6.14	8.87	-2.73

Table 601 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5530	-3.44	-4.54	-	-	-0.95	11.00	-11.95
5690	3.88	2.23	-	-	6.14	11.00	-4.86

Table 602 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU	Duty Cycle (%):	92.9
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.32
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.13
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570	-6.60	-7.52	-	-	-4.03	8.87	-12.90

Table 603 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	96.6
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.15
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.18
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720	-0.75	-1.47	-	-	1.91	27.82	-25.91
5745	8.24	7.81	-	-	11.04	28.68	-17.65
5785	8.08	7.93	-	-	11.01	28.68	-17.67
5825	8.12	8.10	-	-	11.12	28.68	-17.56

Table 604 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	93.8
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.28
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.18
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5710	-2.86	-3.09	-	-	0.04	27.82	-27.79
5755	5.59	4.99	-	-	8.31	28.68	-20.37
5795	5.27	5.43	-	-	8.36	28.68	-20.32

Table 605 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	89.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.50
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.13
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5690	-3.03	-3.80	-	-	-0.39	27.87	-28.26
5775	0.64	0.32	-	-	3.50	28.68	-25.19

Table 606 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	95.9
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.18
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.18
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720	-1.27	-1.87	-	-	1.45	27.82	-26.37
5745	7.95	7.58	-	-	10.78	28.68	-17.91
5785	8.26	7.70	-	-	11.00	28.68	-17.69
5825	8.07	8.03	-	-	11.06	28.68	-17.62

Table 607 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	95.8
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.19
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.18
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5710	-2.70	-3.88	-	-	-0.24	27.82	-28.06
5755	5.19	4.58	-	-	7.90	28.68	-20.78
5795	5.22	5.25	-	-	8.24	28.68	-20.44

Table 608 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	95.5
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.20
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.13
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5690	-3.28	-4.48	-	-	-0.83	27.87	-28.70
5775	0.68	0.14	-	-	3.43	28.68	-25.26

Table 609 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU26	Duty Cycle (%):	97.2
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.12
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.10
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5180 (RU26.0)	1.57	3.24	-	-	5.49	8.90	-3.40
5220 (RU26.0)	2.26	3.27	-	-	5.80	8.90	-3.09
5240 (RU26.8)	2.82	2.54	-	-	5.70	8.90	-3.20

Table 610 - FCC Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	96.9
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.14
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.10
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5180 (RU52.37)	1.78	3.61	-	-	5.80	8.90	-3.10
5220 (RU52.37)	2.33	3.45	-	-	5.94	8.90	-2.96
5240 (RU52.40)	2.37	3.25	-	-	5.85	8.90	-3.05

Table 611 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	97.8
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.10
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.10
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5180 (RU106.53)	1.99	3.21	-	-	5.65	8.90	-3.25
5220 (RU106.53)	2.18	3.74	-	-	6.04	8.90	-2.86
5240 (RU106.54)	3.20	3.64	-	-	6.44	8.90	-2.46

Table 612 - FCC Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU26	Duty Cycle (%):	93.6
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.29
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.10
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5180 (RU26.0)	-6.94	-6.10	-	-	-3.49	8.10	4.61	10.00	-5.39
5220 (RU26.0)	-5.30	-5.00	-	-	-2.14	8.10	5.97	10.00	-4.03
5240 (RU26.8)	-7.06	-6.85	-	-	-3.94	8.10	4.16	10.00	-5.84

Table 613 - ISFD Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	97.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.13
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.10
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5180 (RU52.37)	-4.78	-3.53	-	-	-1.10	8.10	7.00	10.00	-3.00
5220 (RU52.37)	-4.63	-3.75	-	-	-1.16	8.10	6.94	10.00	-3.06
5240 (RU52.40)	-4.18	-4.05	-	-	-1.10	8.10	7.00	10.00	-3.00

Table 614 - ISED Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	98.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.09
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.10
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5180 (RU106.53)	-5.27	-3.40	-	-	-1.23	8.10	6.87	10.00	-3.13
5220 (RU106.53)	-5.04	-3.45	-	-	-1.16	8.10	6.94	10.00	-3.06
5240 (RU106.54)	-4.36	-3.24	-	-	-0.76	8.10	7.35	10.00	-2.65

Table 615 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	97.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.13
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.46
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260 (RU52.37)	2.57	3.31	-	-	5.97	8.54	-2.58
5300 (RU52.37)	3.52	3.64	-	-	6.59	8.54	-1.95
5320 (RU52.40)	3.33	2.81	-	-	6.09	8.54	-2.46

Table 616 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260 (RU52.37)	2.57	3.31	-	-	5.97	11.00	-5.03
5300 (RU52.37)	3.52	3.64	-	-	6.59	11.00	-4.41
5320 (RU52.40)	3.33	2.81	-	-	6.09	11.00	-4.91

Table 617 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	97.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.10
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.46
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260 (RU106.53)	2.15	3.14	-	-	5.68	8.54	-2.86
5300 (RU106.53)	2.95	3.43	-	-	6.20	8.54	-2.34
5320 (RU106.54)	3.32	2.48	-	-	5.93	8.54	-2.61

Table 618 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260 (RU106.53)	2.15	3.14	-	-	5.68	11.00	-5.32
5300 (RU106.53)	2.95	3.43	-	-	6.20	11.00	-4.80
5320 (RU106.54)	3.32	2.48	-	-	5.93	11.00	-5.07

Table 619 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	96.9
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.14
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.13
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500 (RU52.37)	3.87	3.16	-	-	6.54	8.87	-2.33
5600 (RU52.37)	3.51	2.84	-	-	6.20	8.87	-2.67
5700 (RU52.40)	3.84	3.05	-	-	6.47	8.87	-2.40
5720 (RU52.39)	3.36	2.99	-	-	6.19	8.87	-2.68

Table 620 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500 (RU52.37)	3.87	3.16	-	-	6.54	11.00	-4.46
5580 (RU52.37)	3.70	3.35	-	-	6.54	11.00	-4.46
5700 (RU52.40)	3.84	3.05	-	-	6.47	11.00	-4.53
5720 (RU52.39)	3.36	2.99	-	-	6.19	11.00	-4.81

Table 621 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	97.9
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.09
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.13
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500 (RU106.53)	3.72	3.72	-	-	6.73	8.87	-2.14
5600 (RU106.53)	3.73	3.38	-	-	6.57	8.87	-2.30
5700 (RU106.54)	3.91	3.37	-	-	6.66	8.87	-2.21
5720 (RU106.53)	3.38	3.46	-	-	6.43	8.87	-2.44

Table 622 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500 (RU106.53)	3.72	3.72	-	-	6.73	11.00	-4.27
5580 (RU106.53)	4.10	3.55	-	-	6.85	11.00	-4.15
5700 (RU106.54)	3.91	3.37	-	-	6.66	11.00	-4.34
5720 (RU106.53)	3.38	3.46	-	-	6.43	11.00	-4.57

Table 623 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU26	Duty Cycle (%):	97.1
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.13
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	7.32
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5745 (RU26.0)	8.16	6.93	-	-	10.60	28.68	-18.09
5785 (RU26.0)	7.83	7.72	-	-	10.79	28.68	-17.90
5825 (RU26.8)	7.53	7.71	-	-	10.63	28.68	-18.06

Table 624 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	97.0
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.13
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.18
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720 (RU52.40)	0.62	-0.09	-	-	3.29	27.82	-24.53
5745 (RU52.37)	8.46	7.55	-	-	11.04	28.68	-17.65
5785 (RU52.37)	7.89	8.00	-	-	10.96	28.68	-17.73
5825 (RU52.40)	8.46	8.63	-	-	11.55	28.68	-17.13

Table 625 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)f)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	97.8
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.10
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	8.18
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720 (RU106.54)	1.02	0.09	-	-	3.59	27.82	-24.23
5745 (RU106.53)	8.43	7.80	-	-	11.13	28.68	-17.55
5785 (RU106.53)	8.39	8.51	-	-	11.46	28.68	-17.23
5825 (RU106.54)	8.01	8.06	-	-	11.04	28.68	-17.64

Table 626 - Maximum Power Spectral Density Results



MIMO SDM

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	94.0
Modulation Coding Scheme:	MCS10	DCCF (dB):	0.27
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.13
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5180	4.10	5.89	-	-	8.10	11.00	-2.90
5220	5.16	6.32	-	-	8.79	11.00	-2.21
5240	5.01	5.88	-	-	8.48	11.00	-2.52

Table 627 - FCC Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	89.9
Modulation Coding Scheme:	MCS10	DCCF (dB):	0.46
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.13
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5190	0.12	1.53	-	-	3.89	11.00	-7.11
5230	4.57	5.79	-	-	8.23	11.00	-2.77

Table 628 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	83.5
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.79
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.13
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5210	-3.49	-2.11	-	-	0.27	11.00	-10.73

Table 629 - FCC Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT160	Duty Cycle (%):	79.1
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	1.02
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.13
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250	-9.09	-8.26	-	-	-5.64	11.00	-16.64

Table 630 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	95.8
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.19
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.13
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5180	4.18	5.86	-	-	8.11	11.00	-2.89
5220	4.55	6.00	-	-	8.34	11.00	-2.66
5240	5.07	5.79	-	-	8.45	11.00	-2.55

Table 631 - FCC Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	96.0
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.18
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.13
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5190	-0.61	0.86	-	-	3.20	11.00	-7.80
5230	4.64	5.88	-	-	8.32	11.00	-2.68

Table 632 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	95.4
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.21
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.13
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5210	-4.02	-2.37	-	-	-0.11	11.00	-11.11

Table 633 - FCC Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU	Duty Cycle (%):	92.8
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.33
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.13
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250	-9.80	-8.91	-	-	-6.32	11.00	-17.32

Table 634 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	94.0
Modulation Coding Scheme:	MCS10	DCCF (dB):	0.27
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.13
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5180	-1.77	-0.22	-	-	2.08	5.13	7.22	10.00	-2.78
5220	-1.51	-0.21	-	-	2.20	5.13	7.33	10.00	-2.67
5240	-1.31	-0.30	-	-	2.23	5.13	7.37	10.00	-2.63

Table 635 - ISED Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	89.9
Modulation Coding Scheme:	MCS10	DCCF (dB):	0.46
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.13
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5190	-2.49	-0.86	-	-	1.41	5.13	6.55	10.00	-3.45
5230	-2.06	-0.72	-	-	1.67	5.13	6.81	10.00	-3.19

Table 636 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	83.2
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.80
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.13
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5210	-4.11	-2.26	-	-	-0.08	5.13	5.06	10.00	-4.94

Table 637 - ISED Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT160	Duty Cycle (%):	79.0
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	1.02
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.13
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5250	-9.04	-8.29	-	-	-5.64	5.13	-0.51	10.00	-10.51

Table 638 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	95.7
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.19
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.13
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5180	-2.21	-0.77	-	-	1.58	5.13	6.71	10.00	-3.29
5220	-1.43	-0.25	-	-	2.21	5.13	7.34	10.00	-2.66
5240	-1.92	-0.52	-	-	1.85	5.13	6.98	10.00	-3.02

Table 639 - ISED Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	95.7
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.19
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.13
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5190	-2.39	-0.72	-	-	1.54	5.13	6.67	10.00	-3.33
5230	-1.93	-0.61	-	-	1.79	5.13	6.92	10.00	-3.08

Table 640 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	95.5
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.20
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.13
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5210	-4.09	-2.64	-	-	-0.29	5.13	4.84	10.00	-5.16

Table 641 - ISED Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU	Duty Cycle (%):	92.9
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.32
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.13
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5250	-9.95	-8.77	-	-	-6.31	5.13	-1.17	10.00	-11.17

Table 642 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	94.1
Modulation Coding Scheme:	MCS10	DCCF (dB):	0.26
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.49
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260	5.32	5.80	-	-	8.58	11.00	-2.42
5300	5.95	5.64	-	-	8.81	11.00	-2.19
5320	6.30	5.27	-	-	8.82	11.00	-2.18

Table 643 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	89.8
Modulation Coding Scheme:	MCS10	DCCF (dB):	0.47
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.49
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5270	5.12	5.47	-	-	8.31	11.00	-2.69
5310	0.36	-0.14	-	-	3.13	11.00	-7.87

Table 644 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	83.3
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.79
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.49
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5290	-2.34	-2.21	-	-	0.74	11.00	-10.26

Table 645 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT160	Duty Cycle (%):	79.1
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	1.02
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.49
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250	-8.64	-8.28	-	-	-5.45	11.00	-16.45

Table 646 - Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250	-8.75	-8.03	-	-	-5.36	11.00	-16.36

Table 647 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	95.9
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.18
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.49
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260	5.31	5.68	-	-	8.51	11.00	-2.49
5300	6.04	5.59	-	-	8.83	11.00	-2.17
5320	6.18	5.18	-	-	8.72	11.00	-2.28

Table 648 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	95.8
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.19
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.49
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5270	4.84	5.33	-	-	8.10	11.00	-2.90
5310	-0.03	-0.47	-	-	2.77	11.00	-8.23

Table 649 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	95.4
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.20
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.49
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5290	-2.53	-2.33	-	-	0.58	11.00	-10.42

Table 650 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU	Duty Cycle (%):	92.8
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.33
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.49
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250	-9.56	-8.53	-	-	-6.00	11.00	-17.00

Table 651 - Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5250	-9.33	-8.80	-	-	-6.05	11.00	-17.05

Table 652 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	94.0
Modulation Coding Scheme:	MCS10	DCCF (dB):	0.27
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.14
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500	6.17	5.23	-	-	8.74	11.00	-2.26
5580	6.12	5.50	-	-	8.83	11.00	-2.17
5600	6.35	5.21	-	-	8.82	11.00	-2.18
5700	6.16	4.56	-	-	8.44	11.00	-2.56
5720	5.97	5.32	-	-	8.67	11.00	-2.33

Table 653 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	89.7
Modulation Coding Scheme:	MCS10	DCCF (dB):	0.47
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.14
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5510	1.53	0.74	-	-	4.16	11.00	-6.84
5550	6.00	5.00	-	-	8.54	11.00	-2.46
5590	5.80	5.15	-	-	8.50	11.00	-2.50
5670	4.20	3.24	-	-	6.76	11.00	-4.24
5710	5.70	5.00	-	-	8.38	11.00	-2.62

Table 654 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	83.3
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.79
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.14
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5530	-2.25	-2.87	-	-	0.46	11.00	-10.54
5610	3.13	1.93	-	-	5.59	11.00	-5.41
5690	3.78	2.62	-	-	6.25	11.00	-4.75

Table 655 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT160	Duty Cycle (%):	79.0
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	1.02
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.14
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570	-5.76	-6.63	-	-	-3.16	11.00	-14.16

Table 656 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	95.7
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.19
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.14
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500	5.69	4.92	-	-	8.33	11.00	-2.67
5580	6.33	5.23	-	-	8.82	11.00	-2.18
5600	5.75	4.40	-	-	8.13	11.00	-2.87
5700	4.46	3.12	-	-	6.85	11.00	-4.15
5720	5.89	5.36	-	-	8.64	11.00	-2.36

Table 657 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	95.8
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.19
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.14
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5510	0.88	0.03	-	-	3.49	11.00	-7.51
5550	5.99	4.56	-	-	8.35	11.00	-2.65
5590	5.58	4.40	-	-	8.04	11.00	-2.96
5670	2.62	1.64	-	-	5.17	11.00	-5.83
5710	5.50	4.69	-	-	8.13	11.00	-2.87

Table 658 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	95.3
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.21
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.14
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5530	-3.26	-4.50	-	-	-0.82	11.00	-11.82
5610	2.82	1.51	-	-	5.22	11.00	-5.78
5690	3.83	2.60	-	-	6.26	11.00	-4.74

Table 659 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE160 SU	Duty Cycle (%):	92.7
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.33
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.14
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5570	-6.80	-7.41	-	-	-4.08	11.00	-15.08

Table 660 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	94.2
Modulation Coding Scheme:	MCS10	DCCF (dB):	0.26
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.18
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720	0.98	0.48	-	-	3.75	30.00	-26.25
5745	8.33	7.44	-	-	10.92	30.00	-19.08
5785	8.10	7.74	-	-	10.94	30.00	-19.06
5825	8.52	8.02	-	-	11.28	30.00	-18.72

Table 661 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT40	Duty Cycle (%):	89.9
Modulation Coding Scheme:	MCS10	DCCF (dB):	0.46
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.18
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5710	0.34	-0.84	-	-	2.80	30.00	-27.20
5755	5.93	5.23	-	-	8.60	30.00	-21.40
5795	5.24	5.12	-	-	8.19	30.00	-21.81

Table 662 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	84.3
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.74
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.14
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5690	-2.23	-3.31	-	-	0.27	30.00	-29.73
5775	1.35	1.19	-	-	4.28	30.00	-25.72

Table 663 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	95.9
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.18
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.18
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720	1.10	0.73	-	-	3.93	30.00	-26.07
5745	8.51	7.78	-	-	11.17	30.00	-18.83
5785	8.08	7.83	-	-	10.97	30.00	-19.03
5825	8.24	7.83	-	-	11.05	30.00	-18.95

Table 664 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE40 SU	Duty Cycle (%):	95.8
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.19
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.18
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5710	-0.80	-1.87	-	-	1.71	30.00	-28.29
5755	5.26	4.66	-	-	7.98	30.00	-22.02
5795	5.46	5.09	-	-	8.29	30.00	-21.71

Table 665 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE80 SU	Duty Cycle (%):	95.5
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.20
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.14
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5690	-2.83	-3.81	-	-	-0.28	30.00	-30.28
5775	0.59	0.36	-	-	3.49	30.00	-26.51

Table 666 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU26	Duty Cycle (%):	97.0
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.13
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.13
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5180 (RU26.0)	3.69	5.64	-	-	7.79	11.00	-3.21
5220 (RU26.0)	4.14	5.42	-	-	7.84	11.00	-3.16
5240 (RU26.8)	4.58	5.60	-	-	8.13	11.00	-2.87

Table 667 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	97.0
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.13
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.13
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5180 (RU52.37)	3.66	5.69	-	-	7.80	11.00	-3.20
5220 (RU52.37)	4.27	5.77	-	-	8.09	11.00	-2.91
5240 (RU52.40)	4.16	5.30	-	-	7.77	11.00	-3.23

Table 668 - FCC Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	97.8
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.10
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.13
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5180 (RU106.53)	4.39	5.55	-	-	8.02	11.00	-2.98
5220 (RU106.53)	4.36	6.15	-	-	8.35	11.00	-2.65
5240 (RU106.54)	4.85	5.88	-	-	8.41	11.00	-2.59

Table 669 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU26	Duty Cycle (%):	96.9
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.14
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.13
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5180 (RU26.0)	-2.31	-1.15	-	-	1.32	5.13	6.45	10.00	-3.55
5220 (RU26.0)	-1.67	-1.09	-	-	1.64	5.13	6.77	10.00	-3.23
5240 (RU26.8)	-1.89	-1.94	-	-	1.09	5.13	6.23	10.00	-3.77

Table 670 - ISSED Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	97.0
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.13
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.13
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5180 (RU52.37)	-2.36	-0.36	-	-	1.76	5.13	6.90	10.00	-3.10
5220 (RU52.37)	-1.95	-0.65	-	-	1.76	5.13	6.89	10.00	-3.11
5240 (RU52.40)	-1.34	-0.48	-	-	2.12	5.13	7.25	10.00	-2.75

Table 671 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	98.0
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.09
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.13
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5180 (RU106.53)	-2.71	-0.15	-	-	1.77	5.13	6.90	10.00	-3.10
5220 (RU106.53)	-2.26	-0.27	-	-	1.86	5.13	6.99	10.00	-3.01
5240 (RU106.54)	-1.47	-0.55	-	-	2.03	5.13	7.16	10.00	-2.84

Table 672 - ISED Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	97.1
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.13
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.49
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260 (RU52.37)	4.76	5.60	-	-	8.21	11.00	-2.79
5300 (RU52.37)	5.89	5.86	-	-	8.89	11.00	-2.11
5320 (RU52.40)	5.21	4.71	-	-	7.98	11.00	-3.02

Table 673 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	97.9
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.09
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.49
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260 (RU106.53)	4.58	5.85	-	-	8.27	11.00	-2.73
5300 (RU106.53)	5.49	5.83	-	-	8.67	11.00	-2.33
5320 (RU106.54)	5.18	4.52	-	-	7.87	11.00	-3.13

Table 674 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	96.9
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.14
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.14
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500 (RU52.37)	6.17	5.27	-	-	8.76	11.00	-2.24
5580 (RU52.37)	5.72	5.15	-	-	8.46	11.00	-2.54
5600 (RU52.37)	6.09	5.14	-	-	8.65	11.00	-2.35
5700 (RU52.40)	5.31	4.21	-	-	7.81	11.00	-3.19
5720 (RU52.39)	5.95	5.48	-	-	8.73	11.00	-2.27

Table 675 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	97.8
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.10
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.14
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500 (RU106.53)	6.16	5.97	-	-	9.08	11.00	-1.92
5580 (RU106.53)	6.12	5.82	-	-	8.98	11.00	-2.02
5600 (RU106.53)	6.33	5.71	-	-	9.04	11.00	-1.96
5700 (RU106.54)	6.22	5.18	-	-	8.74	11.00	-2.26
5720 (RU106.53)	6.31	5.47	-	-	8.92	11.00	-2.08

Table 676 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU26	Duty Cycle (%):	97.3
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.12
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	4.31
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5745 (RU26.0)	7.52	6.91	-	-	10.24	30.00	-19.76
5785 (RU26.0)	8.22	7.34	-	-	10.81	30.00	-19.19
5825 (RU26.8)	7.48	7.17	-	-	10.34	30.00	-19.66

Table 677 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	97.0
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.13
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.18
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720 (RU52.40)	2.96	2.37	-	-	5.69	30.00	-24.31
5745 (RU52.37)	8.18	7.99	-	-	11.10	30.00	-18.90
5785 (RU52.37)	7.92	7.93	-	-	10.94	30.00	-19.06
5825 (RU52.40)	7.91	7.78	-	-	10.86	30.00	-19.14

Table 678 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d(ii), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	97.9
Modulation Coding Scheme:	MCS2x2	DCCF (dB):	0.09
Antenna Configuration:	MIMO SDM	Peak Antenna Gain (dBi):	5.18
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720 (RU106.54)	3.73	2.19	-	-	6.04	30.00	-23.96
5745 (RU106.53)	8.21	8.01	-	-	11.12	30.00	-18.88
5785 (RU106.53)	8.39	8.90	-	-	11.66	30.00	-18.34
5825 (RU106.54)	8.15	8.23	-	-	11.20	30.00	-18.80

Table 679 - Maximum Power Spectral Density Results



TxBF

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ac VHT20	Duty Cycle (%):	90.8
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.42
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.10
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5180	2.84	3.03	-	-	5.95	8.90	-2.95
5220	3.59	3.67	-	-	6.64	8.90	-2.26
5240	3.65	3.29	-	-	6.48	8.90	-2.42

Table 680 - FCC Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		

DUT Configuration			
Mode:	802.11ac VHT40	Duty Cycle (%):	95.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.21
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.10
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5190	0.23	0.08	-	-	3.16	8.90	-5.73
5230	3.13	3.26	-	-	6.21	8.90	-2.69

Table 681 - FCC Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	15.407 (a)(1)(iv)	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	90.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.44
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.10
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5210	-4.90	-4.53	-	-	-1.70	8.90	-10.60

Table 682 - FCC Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		

DUT Configuration			
Mode:	802.11ac VHT20	Duty Cycle (%):	90.6
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.43
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.10
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5180	-2.83	-4.18	-	-	-0.44	8.10	7.66	10.00	-2.34
5220	-3.95	-3.94	-	-	-0.93	8.10	7.17	10.00	-2.83
5240	-5.35	-3.54	-	-	-1.34	8.10	6.76	10.00	-3.24

Table 683 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		

DUT Configuration			
Mode:	802.11ac VHT40	Duty Cycle (%):	91.6
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.38
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.10
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5190	-4.31	-4.25	-	-	-1.27	8.10	6.83	10.00	-3.17
5230	-4.16	-3.59	-	-	-0.86	8.10	7.25	10.00	-2.75

Table 684 - ISED Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.150-5.250 GHz	Band:	U-NII-1
Limit Clause(s):	RSS-247 6.2.1.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	89.5
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.48
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.10
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	A	B	C	D	Σ				
5210	-6.25	-6.39	-	-	-3.31	8.10	4.80	10.00	-5.20

Table 685 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		

DUT Configuration			
Mode:	802.11ac VHT20	Duty Cycle (%):	95.3
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.25
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.46
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260	3.74	3.58	-	-	6.67	8.54	-1.87
5300	3.70	2.66	-	-	6.22	8.54	-2.32
5320	4.05	2.19	-	-	6.23	8.54	-2.32

Table 686 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5260	3.74	3.58	-	-	6.67	11.00	-4.33
5300	3.70	2.66	-	-	6.22	11.00	-4.78
5320	4.05	2.19	-	-	6.23	11.00	-4.77

Table 687 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		

DUT Configuration			
Mode:	802.11ac VHT40	Duty Cycle (%):	95.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.21
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.46
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5270	2.74	3.22	-	-	5.99	8.54	-2.55
5310	1.35	1.11	-	-	4.24	8.54	-4.30

Table 688 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5270	2.74	3.22	-	-	5.99	11.00	-5.01
5310	1.35	1.11	-	-	4.24	11.00	-6.76

Table 689 - ISSED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.250-5.350 GHz	Band:	U-NII-2A
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.2.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	93.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.28
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.46
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5290	-3.28	-4.76	-	-	-0.95	8.54	-9.49

Table 690 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5290	-3.28	-4.76	-	-	-0.95	11.00	-11.95

Table 691 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		

DUT Configuration			
Mode:	802.11ac VHT20	Duty Cycle (%):	94.6
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.24
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.13
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500	3.45	2.07	-	-	5.83	8.87	-3.04
5600	3.39	1.85	-	-	5.70	8.87	-3.17
5700	3.89	1.06	-	-	5.71	8.87	-3.16
5720	3.57	3.23	-	-	6.41	8.87	-2.46

Table 692 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5500	3.45	2.07	-	-	5.83	11.00	-5.17
5580	4.00	2.22	-	-	6.21	11.00	-4.79
5700	3.89	1.06	-	-	5.71	11.00	-5.29
5720	3.57	3.23	-	-	6.41	11.00	-4.59

Table 693 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		

DUT Configuration			
Mode:	802.11ac VHT40	Duty Cycle (%):	92.6
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.33
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.13
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5510	-0.34	-2.07	-	-	1.89	8.87	-6.98
5590	4.30	3.20	-	-	6.80	8.87	-2.07
5670	2.79	1.56	-	-	5.23	8.87	-3.64
5710	4.81	3.93	-	-	7.40	8.87	-1.47

Table 694 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5510	-0.34	-2.07	-	-	1.89	11.00	-9.11
5550	3.77	2.42	-	-	6.16	11.00	-4.84
5670	2.79	1.56	-	-	5.23	11.00	-5.77
5710	4.81	3.93	-	-	7.40	11.00	-3.60

Table 695 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.470-5.725 GHz	Band:	U-NII-2C
Limit Clause(s):	15.407 (a)(2) RSS-247 6.2.3.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	90.5
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.44
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.13
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5530	-3.57	-5.42	-	-	-1.39	8.87	-10.26
5610	1.13	-0.68	-	-	3.33	8.87	-5.54
5690	3.48	2.15	-	-	5.87	8.87	-3.00

Table 696 - FCC Maximum Power Spectral Density Results

Test Frequency (MHz)	PSD (dBm / MHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5530	-3.57	-5.42	-	-	-1.39	11.00	-12.39
5690	3.48	2.15	-	-	5.87	11.00	-5.13

Table 697 - ISED Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		

DUT Configuration			
Mode:	802.11ac VHT20	Duty Cycle (%):	93.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.30
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.18
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5720	-0.74	-1.83	-	-	1.76	27.82	-26.06
5745	9.86	8.60	-	-	12.29	28.68	-16.40
5785	8.18	9.43	-	-	11.86	28.68	-16.83
5825	9.43	8.62	-	-	12.06	28.68	-16.63

Table 698 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		

DUT Configuration			
Mode:	802.11ac VHT40	Duty Cycle (%):	92.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.33
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.18
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5710	-0.01	-1.94	-	-	2.14	27.82	-25.68
5755	7.42	4.95	-	-	9.37	28.68	-19.31
5795	5.84	6.41	-	-	9.14	28.68	-19.54

Table 699 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	5.725-5.850 GHz	Band:	U-NII-3
Limit Clause(s):	15.407 (a)(3) RSS-247 6.2.4.1	Test Method(s):	C63.10 12.4.2.4 C63.10 12.6
Additional Reference(s):	662911 D01 v02r01 F)2)d)(i), 662911 D01 v02r01 E)2)b)		

DUT Configuration			
Mode:	802.11ac VHT80	Duty Cycle (%):	92.5
Modulation Coding Scheme:	MCS4x1	DCCF (dB):	0.34
Antenna Configuration:	TxBF	Peak Antenna Gain (dBi):	8.13
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	PSD (dBm / 500 kHz)					Limit (dBm)	Margin (dB)
	A	B	C	D	Σ		
5690	-3.06	-2.57	-	-	0.20	27.87	-27.67
5775	0.43	-0.04	-	-	3.21	28.68	-25.47

Table 700 - Maximum Power Spectral Density Results



FCC 47 CFR Part 15E, Limit Clause 15.407(a)

Condition of Operation	Frequency Range (MHz)			
	5150-5250	5250-5350	5470-5725	5725-5850
Max Conducted Power Spectral Density	17 dBm/MHz for master device 11 dBm/MHz for mobile/portable client device	11 dBm/MHz		30 dBm/500 kHz

Table 701

ISED RSS-247, Limit Clause 6.2.1.1, 6.2.2.1, 6.2.3.1, 6.2.4.1 and 6.2.5.2

Device	Frequency Range (MHz)				
	5150-5250	5250-5350	5470-5725	5725-5850	5850-5895
OEM installed in vehicles	-	-	-	-	-
Other	≤10 dBm/MHz*	≤11 dBm/MHz	≤11 dBm/MHz	≤30 dBm/500kHz	Fixed Outdoor Access Point: 23 dBm/MHz* Fixed Outdoor Client: 17 dBm/MHz Indoor Access Point: 20 dBm/MHz Indoor Subordinate: 20 dBm/MHz Indoor Client: 14 dBm/MHz

Table 702

*Maximum power spectral density specified as EIRP.



2.4.7 Test Location and Test Equipment Used

This test was carried out in RF Chamber 18 and RF Laboratory 14.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
Hygrometer	Rotronic	I-1000	3068	12	07-Nov-2024
1800-6000 MHz Power Splitter	Mini-Circuits	ZN2PD-63-S+	4055	-	O/P Mon
AC Programmable Power Supply	iTech	IT7324	5225	-	O/P Mon
Attenuator 5W 30dB DC-18GHz	Aaren	AT40A-4041-D18-30	5505	12	22-Feb-2025
MXA Signal Analyser	Keysight Technologies	N9020B	5529	24	13-Dec-2024
2-Way Power Divider (2-8 GHz)	Aaren	AT30A-TE0208-2-AF	5685	12	02-Jan-2025
USB Power Sensor	Boonton	RTP5008	5820	12	07-Feb-2025
USB Power Sensor	Boonton	RTP5008	5821	12	07-Feb-2025
Digital Multimeter	Fluke	115	6145	12	06-Jun-2025
Cable (SMA to SMA 1m)	Junkosha	MWX221/B	6305	12	20-May-2025
MXA Signal Analyser	Keysight Technologies	N9020B	6417	24	26-Feb-2025
MXA Signal Analyser	Keysight Technologies	N9020B	6419	24	28-Feb-2025
Signal Conditioning Unit	TUV SUD	SPECTRUM_SCU001	6426	12	07-Feb-2025
Directional Coupler 2-8GHz	RF-Lambda	RFDC2G8G10	6447	-	O/P Mon
Directional Coupler 2-8GHz	RF-Lambda	RFDC2G8G10	6448	-	O/P Mon
Signal Conditioning Unit	TUV SUD	SPECTRUM_SCU001	6517	12	22-Feb-2025
Signal Conditioning Unit	TUV SUD	SPECTRUM_SCU001	6518	12	16-Feb-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6526	12	22-Feb-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6527	12	05-Mar-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6529	12	16-Feb-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6530	12	16-Feb-2025
USB Wideband Power Sensor	Boonton	RTP5008	6585	12	20-Feb-2025
USB Wideband Power Sensor	Boonton	RTP5008	6586	12	20-Feb-2025
AC Programmable Power Supply	iTech	IT7324	6662	-	O/P Mon
AC Programmable Power Supply	iTech	IT7324	6665	-	O/P Mon
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6752	12	06-Feb-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6753	12	06-Feb-2025

Table 703

O/P Mon - Output Monitored using calibrated equipment



2.5 Authorised Band Edges

2.5.1 Specification Reference

FCC 47 CFR Part 15E, Clause 15.407 (b)
ISED RSS-247, Clause 6.2

2.5.2 Equipment Under Test and Modification State

A3137, S/N: FV5VYV72RL - Modification State 0

2.5.3 Date of Test

26-April-2024 to 24-July-2024

2.5.4 Test Method

The test was performed in accordance with ANSI C63.10, clause 6.6.

EIRP limits were converted to field strength at 3 m using the following formula:

Field Strength (dB μ V/m at 3 m) = EIRP (dBm) + 95.2 dB

Authorised band edge measurements were performed, with the device operating in SISO and MIMO configurations, across the various modes supported by the device.

The measurements displayed within this report, have been limited to those modes which have been shown to be worst case.

Further measurements are held on file by TÜV SÜD and are available if required.

2.5.5 Environmental Conditions

Ambient Temperature	21.6 - 24.3 °C
Relative Humidity	35.6 - 49.5 %



2.5.6 Test Results

5 GHz WLAN

20 MHz Bandwidth - Core 0 (SISO)

Mode	Data Rate/ MCS	Resource Size	Resource Index	TX Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dBμV/m)
802.11a	24 Mbps	-	-	5500	5470	63.41
802.11a	12 Mbps	-	-	5520	5470	56.53
802.11n HT20	MCS 7	-	-	5500	5470	63.10
802.11n HT20	MCS 2	-	-	5520	5470	55.67
802.11ax HE20	MCS 11x1	SU	-	5500	5470	62.65
802.11ax HE20	MCS 11x1	106	54	5500	5470	59.89
802.11ax HE20	MCS 2x1	SU	-	5520	5470	55.57
802.11ax HE20	MCS 11x1	106	53	5520	5470	54.79
802.11a	24 Mbps	-	-	5745	5725	55.84
802.11n HT20	MCS 7	-	-	5745	5725	56.50
802.11ax HE20	MCS 4x1	SU	-	5745	5725	56.41
802.11ax HE20	MCS 11x1	106	54	5745	5725	55.94
802.11a	12 Mbps	-	-	5680	5725	57.80
802.11a	24 Mbps	-	-	5700	5725	63.69
802.11n HT20	MCS 2	-	-	5680	5725	56.84
802.11n HT20	MCS 2	-	-	5700	5725	63.33
802.11ax HE20	MCS 2x1	SU	-	5680	5725	57.44
802.11ax HE20	MCS 11x1	106	54	5680	5725	56.32
802.11ax HE20	MCS 2x1	SU	-	5700	5725	63.32
802.11ax HE20	MCS 11x1	106	53	5700	5725	63.05
802.11a	54 Mbps	-	-	5720	5850	56.53
802.11a	24 Mbps	-	-	5825	5850	55.99
802.11n HT20	MCS 4	-	-	5720	5850	55.99
802.11n HT20	MCS 2	-	-	5825	5850	55.80
802.11ax HE20	MCS 11x1	SU	-	5720	5850	56.39
802.11ax HE20	MCS 11x1	106	54	5720	5850	56.24
802.11ax HE20	MCS 4x1	SU	-	5825	5850	56.25
802.11ax HE20	MCS 11x1	52	37	5825	5850	55.49

Table 704 - SISO Authorised Band Edge Results

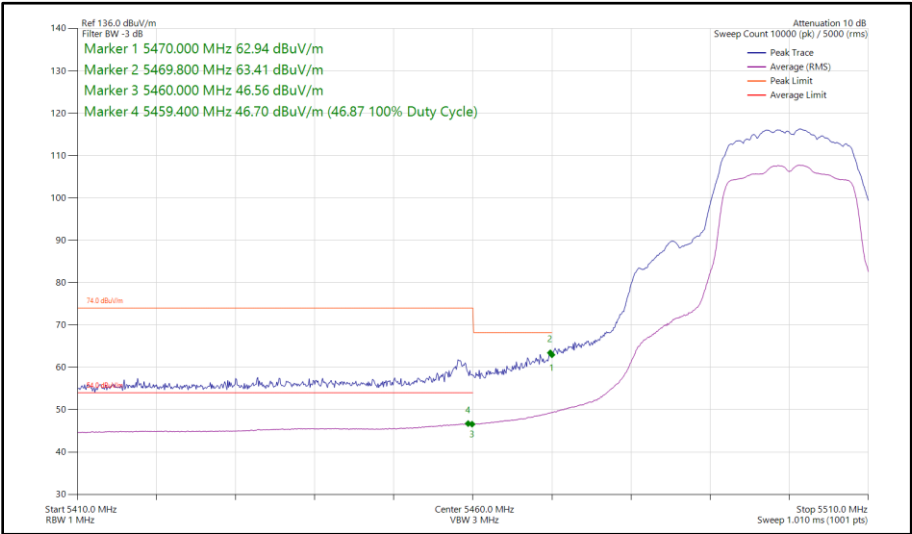


Figure 315 - 802.11a, SISO, Core 0 - 5500 MHz
Band Edge Frequency 5470 MHz

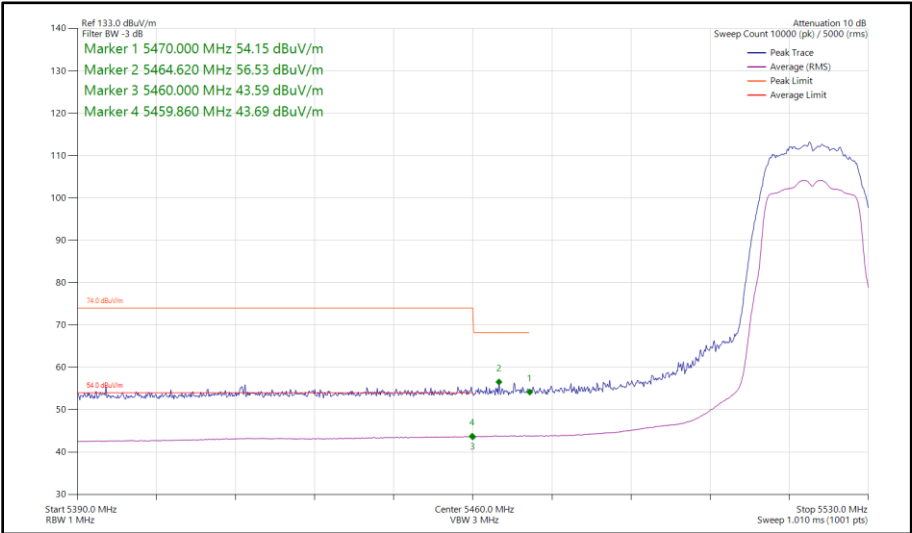


Figure 316 - 802.11a, SISO, Core 0 - 5520 MHz
Band Edge Frequency 5470 MHz