

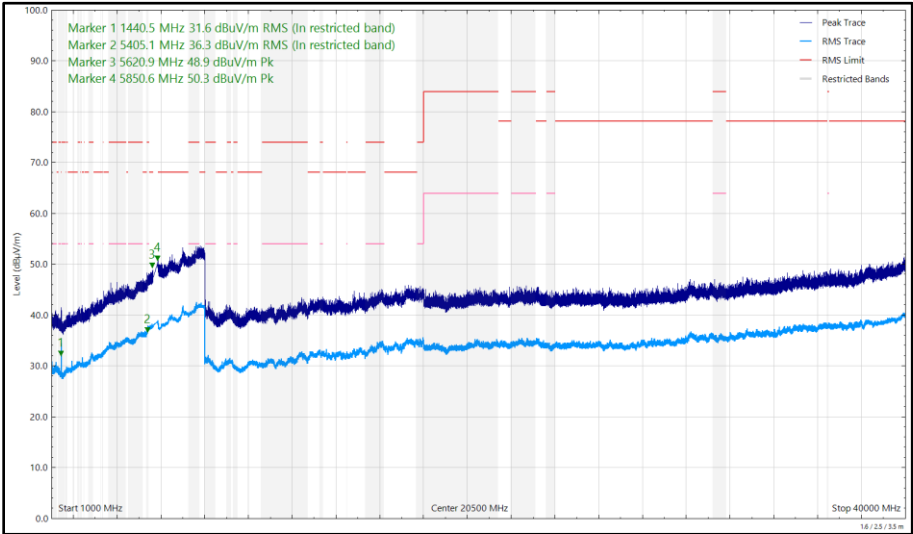


Figure 739 - U-NII-3 - 5745 MHz (CH149), HT20, CDD, Core 0 + Core 1, 1 GHz to 40 GHz, Vertical

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
30.268	17.94	40.00	-22.06	Peak	120	100	Horizontal
40.938	15.52	40.00	-24.48	Q-Peak	111	167	Vertical
1442.277	31.69	54.00	-22.31	RMS	210	320	Vertical
5430.438	36.22	54.00	-17.78	RMS	293	148	Vertical
5458.677	36.40	54.00	-17.60	RMS	72	156	Horizontal
5704.645	50.38	68.20	-17.82	Peak	117	100	Vertical
5723.571	50.54	68.20	-17.66	Peak	92	209	Horizontal
6036.446	49.87	68.20	-18.33	Peak	222	184	Horizontal
6195.220	49.49	68.20	-18.71	Peak	195	104	Vertical

Table 710 - U-NII-3 - 5825 MHz (CH165), HT20, CDD, Core 0 + Core 1, 30 MHz to 40 GHz

No other emissions found within 10 dB of the limit.

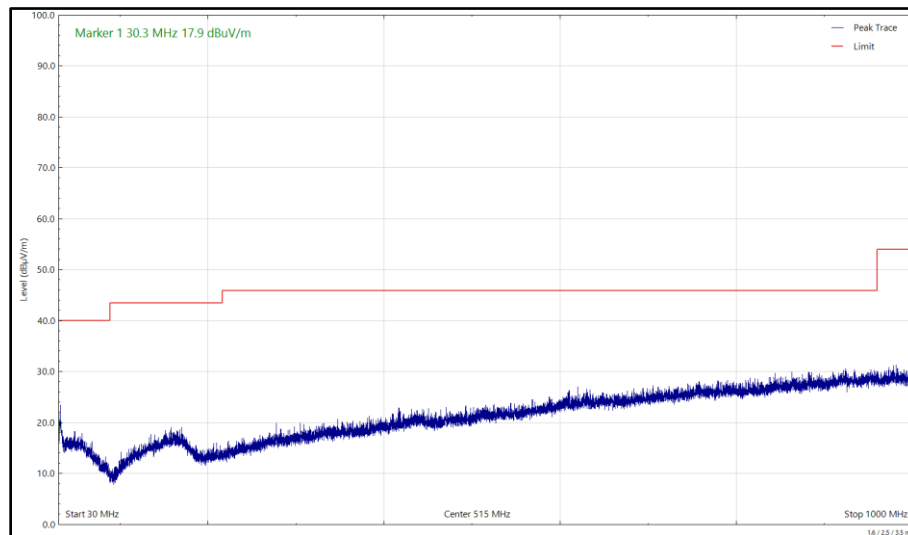


Figure 740 - U-NII-3 - 5825 MHz (CH165), HT20, CDD, Core 0 + Core 1, 30 MHz to 1 GHz, Horizontal (Peak)

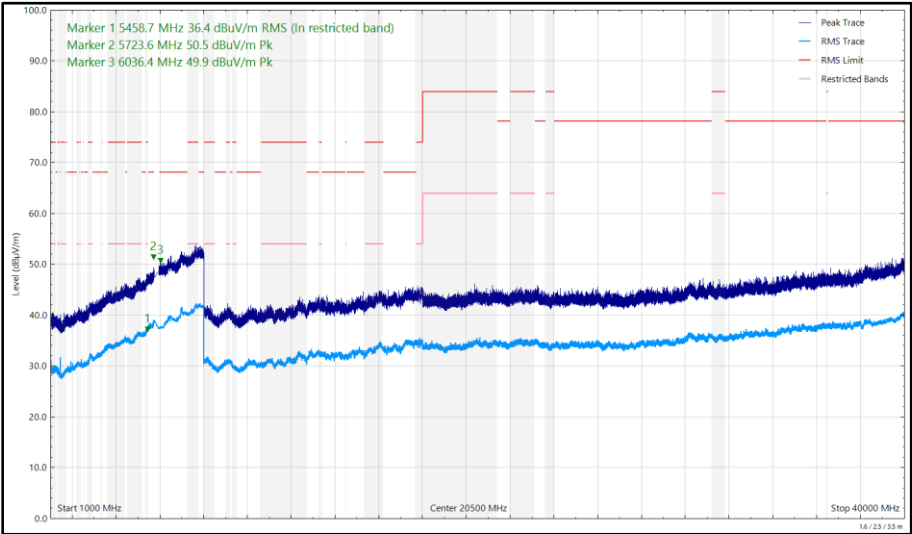


Figure 741 - U-NII-3 - 5825 MHz (CH165), HT20, CDD, Core 0 + Core 1, 1 GHz to 40 GHz, Horizontal

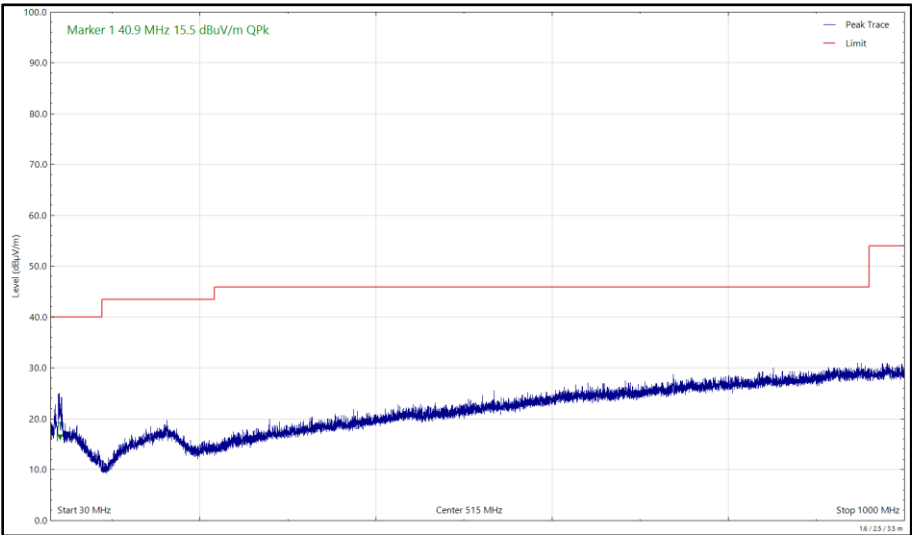


Figure 742 - U-NII-3 - 5825 MHz (CH165), HT20, CDD, Core 0 + Core 1, 30 MHz to 1 GHz, Vertical (Peak)

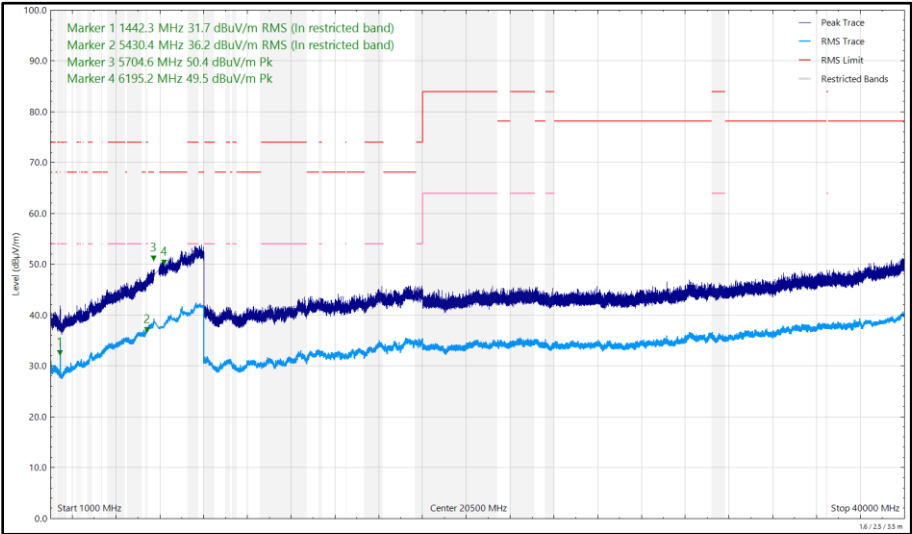


Figure 743 - U-NII-3 - 5825 MHz (CH165), HT20, CDD, Core 0 + Core 1, 1 GHz to 40 GHz, Vertical

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
31.051	20.80	40.00	-19.20	Q-Peak	12	111	Vertical
5419.242	36.48	54.00	-17.52	RMS	5	109	Vertical
5459.081	36.58	54.00	-17.42	RMS	99	105	Horizontal
5480.363	48.73	68.20	-19.47	Peak	1	221	Vertical
6986.635	53.85	68.20	-14.35	Peak	33	397	Horizontal

Table 711 - U-NII-1 - 5180 MHz (CH36), HE20, RU26-0, CDD, Core 0 + Core 1, 30 MHz to 40 GHz

No other emissions found within 10 dB of the limit.

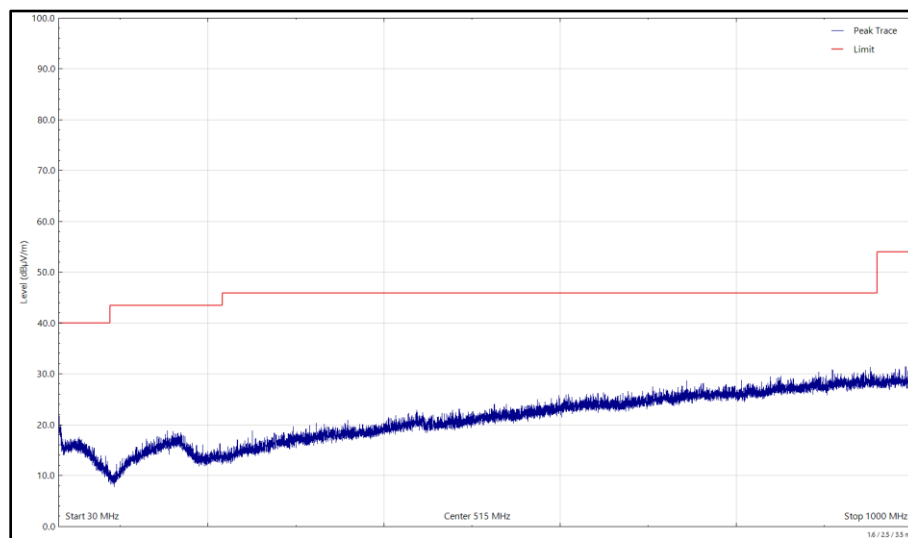


Figure 744 - U-NII-1 - 5180 MHz (CH36), HE20, RU26-0, CDD, Core 0 + Core 1, 30 MHz to 1 GHz, Horizontal (Peak)

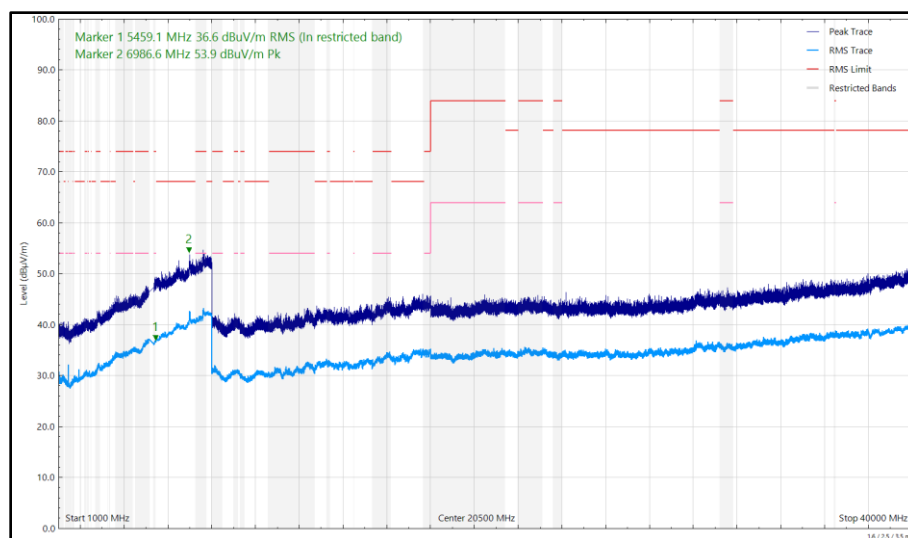


Figure 745 - U-NII-1 - 5180 MHz (CH36), HE20, RU26-0, CDD, Core 0 + Core 1, 1 GHz to 40 GHz, Horizontal

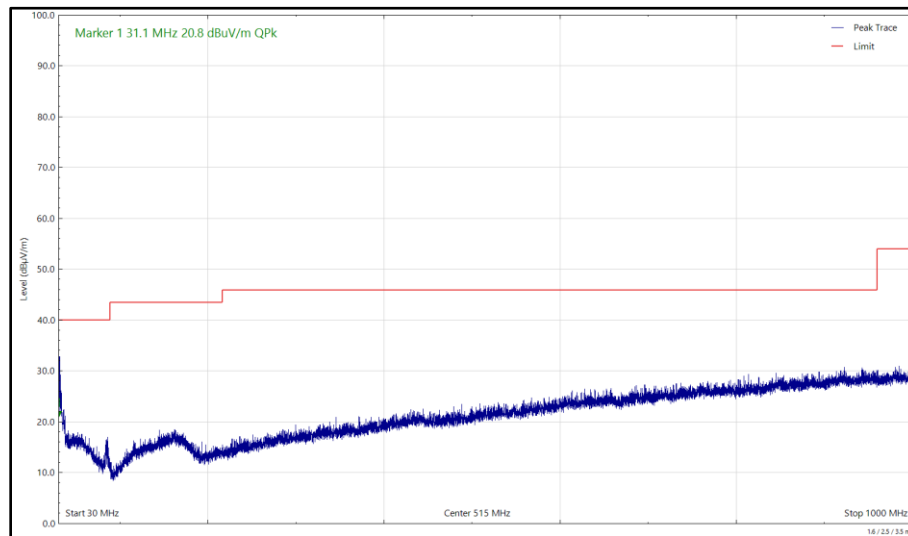


Figure 746 - U-NII-1 - 5180 MHz (CH36), HE20, RU26-0, CDD, Core 0 + Core 1, 30 MHz to 1 GHz, Vertical (Peak)


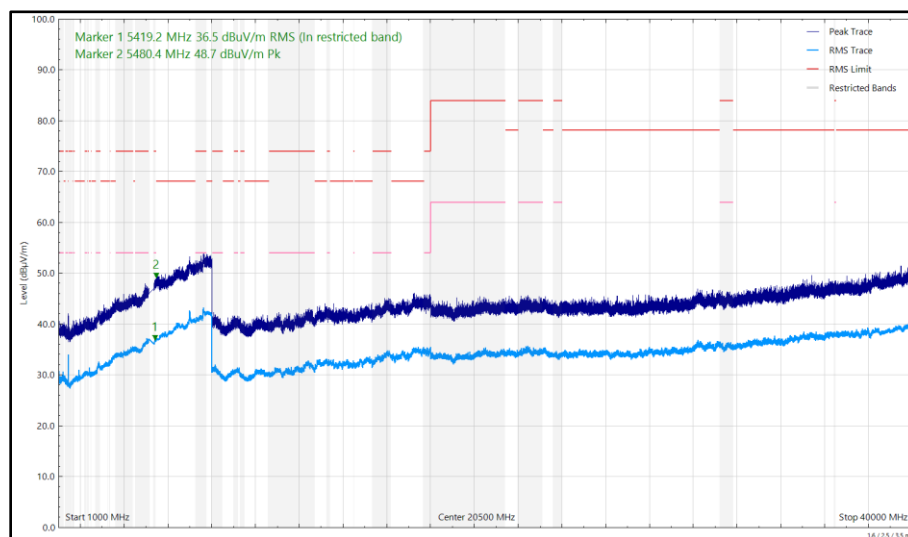


Figure 747 - U-NII-1 - 5180 MHz (CH36), HE20, RU26-0, CDD, Core 0 + Core 1, 1 GHz to 40 GHz, Vertical


Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
5390.318	37.10	54.00	-16.90	RMS	0	386	Horizontal
5418.302	37.03	54.00	-16.97	RMS	295	113	Vertical
5472.554	48.46	68.20	-19.74	Peak	0	190	Vertical
5555.733	48.95	68.20	-19.25	Peak	275	121	Horizontal

**Table 712 - U-NII-2A - 5320 MHz (CH64), HE20, RU52-37, CDD, Core 0 + Core 1,
1 GHz to 40 GHz**

No other emissions found within 10 dB of the limit.

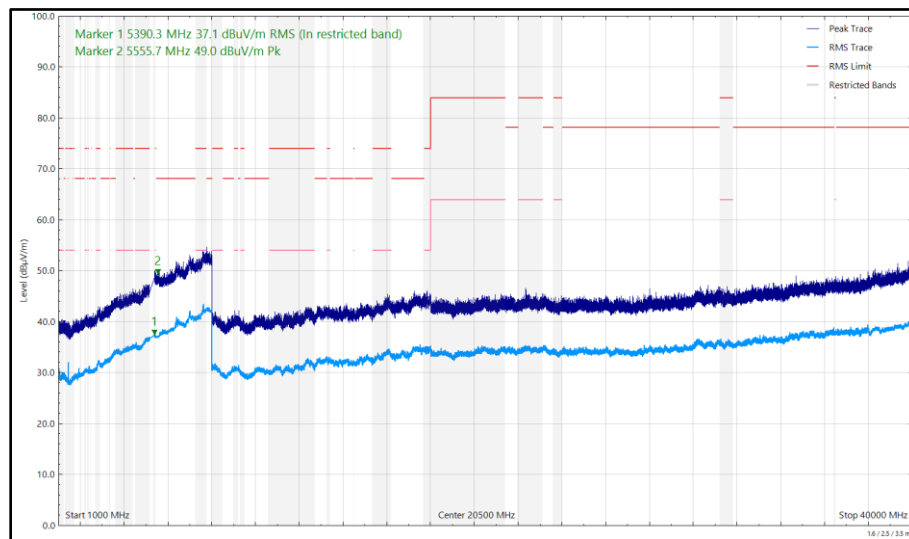

**Figure 748 - U-NII-2A - 5320 MHz (CH64), HE20, RU52-37, CDD, Core 0 + Core 1,
1 GHz to 40 GHz, Horizontal**

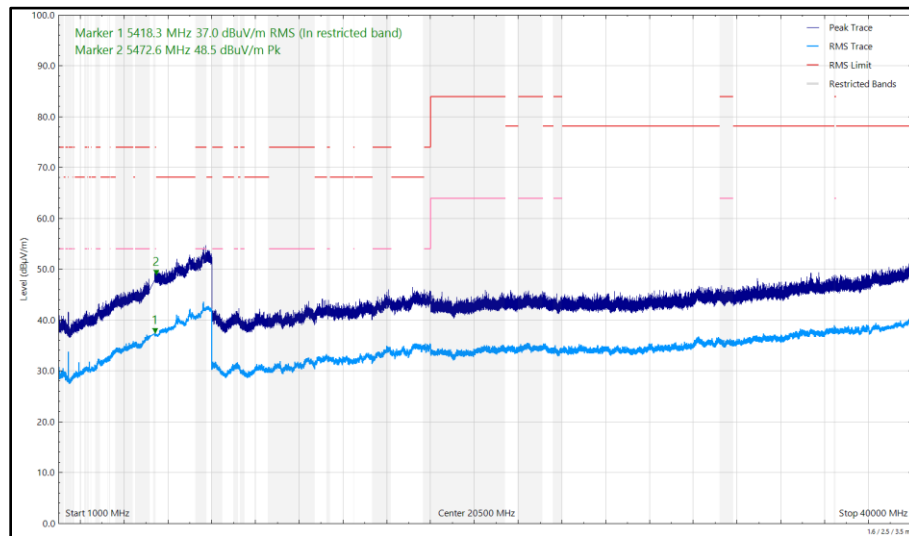


**Figure 749 - U-NII-2A - 5320 MHz (CH64), HE20, RU52-37, CDD, Core 0 + Core 1,
1 GHz to 40 GHz, Vertical**


Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
5407.393	36.45	54.00	-17.55	RMS	267	110	Vertical
5409.172	36.43	54.00	-17.57	RMS	199	378	Horizontal
5726.253	49.18	68.20	-19.02	Peak	357	280	Horizontal
5861.866	49.32	68.20	-18.88	Peak	105	158	Vertical

**Table 713 - U-NII-2C - 5500 MHz (CH100), HE20, RU52-37, CDD, Core 0 + Core 1,
1 GHz to 40 GHz**

No other emissions found within 10 dB of the limit.

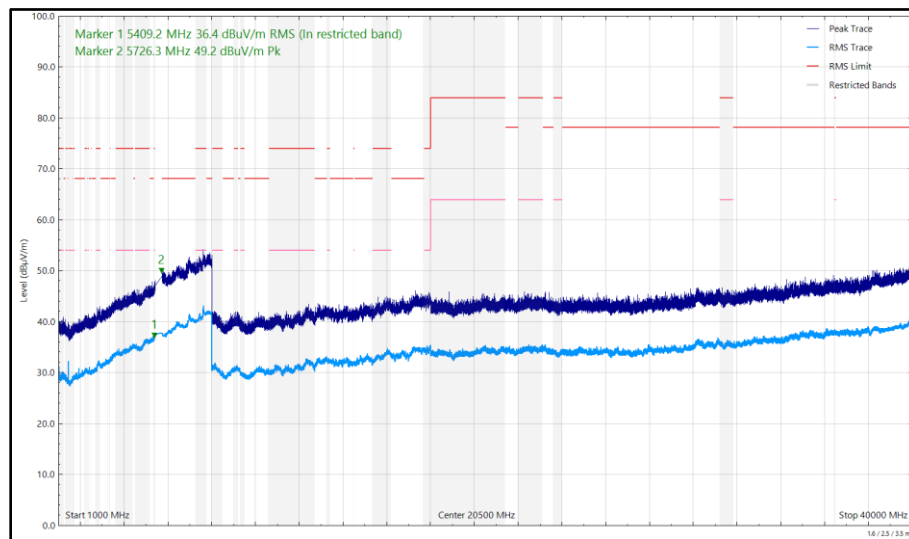

**Figure 750 - U-NII-2C - 5500 MHz (CH100), HE20, RU52-37, CDD, Core 0 + Core 1,
1 GHz to 40 GHz, Horizontal**

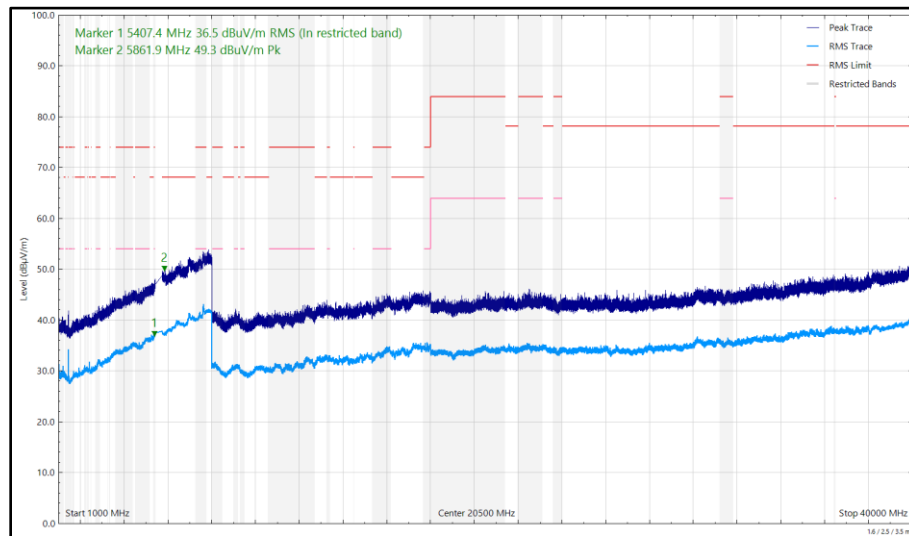


**Figure 751 - U-NII-2C - 5500 MHz (CH100), HE20, RU52-37, CDD, Core 0 + Core 1,
1 GHz to 40 GHz, Vertical**


Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
5458.473	36.54	54.00	-17.46	RMS	302	297	Vertical
5459.855	36.55	54.00	-17.45	RMS	191	251	Horizontal

**Table 714 - U-NII-2C - 5700 MHz (CH140), HE20, RU52-37, CDD, Core 0 + Core 1,
1 GHz to 40 GHz**

No other emissions found within 10 dB of the limit.

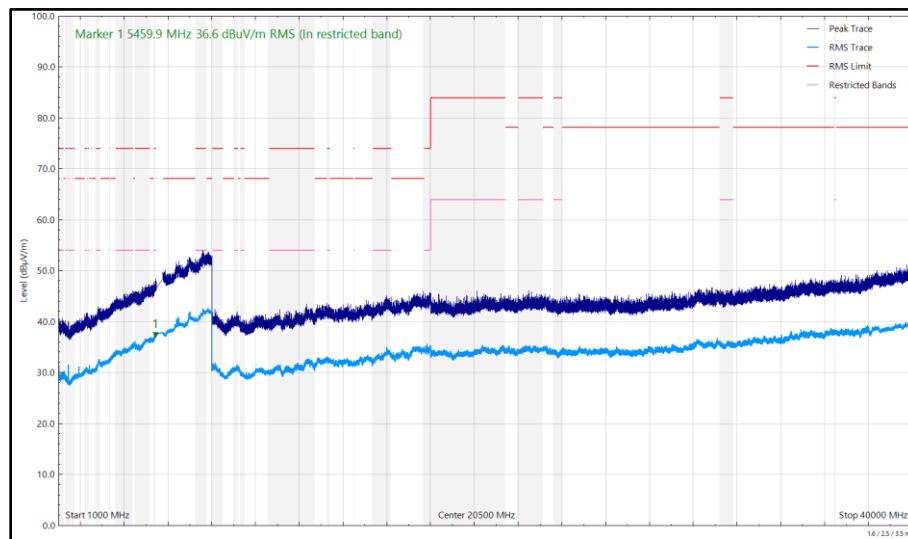

**Figure 752 - U-NII-2C - 5700 MHz (CH140), HE20, RU52-37, CDD, Core 0 + Core 1,
1 GHz to 40 GHz, Horizontal**

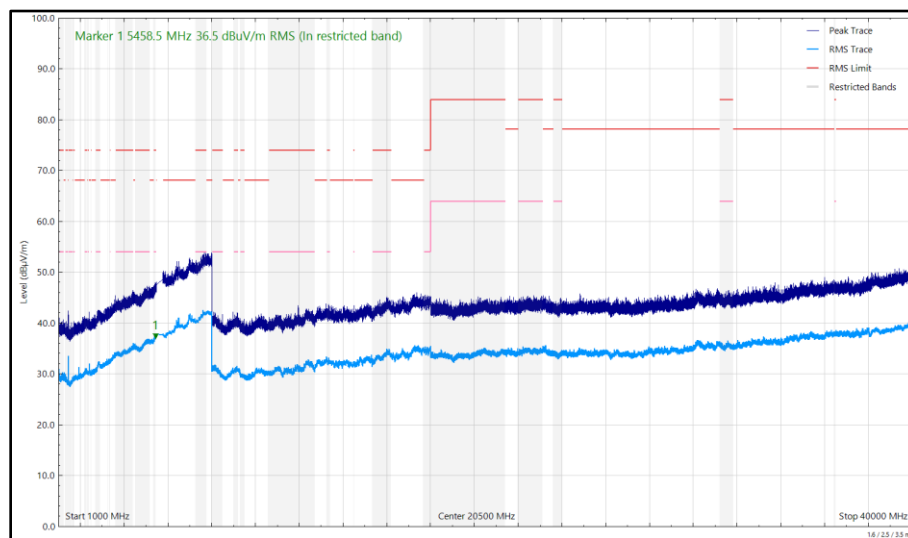

**Figure 753 - U-NII-2C - 5700 MHz (CH140), HE20, RU52-37, CDD, Core 0 + Core 1,
1 GHz to 40 GHz, Vertical**

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
1440.726	32.39	54.00	-21.61	RMS	285	227	Vertical
5396.515	36.28	54.00	-17.72	RMS	89	176	Vertical
5401.525	36.33	54.00	-17.67	RMS	224	390	Horizontal
5540.962	49.67	68.20	-18.53	Peak	87	120	Horizontal
5618.021	49.20	68.20	-19.00	Peak	299	392	Vertical
5861.665	50.07	68.20	-18.13	Peak	162	231	Vertical
5865.612	50.23	68.20	-17.97	Peak	153	388	Horizontal

Table 715 - U-NII-3 - 5745 MHz (CH149), HE20, RU26-0, CDD, Core 0 + Core 1, 1 GHz to 40 GHz

No other emissions found within 10 dB of the limit.

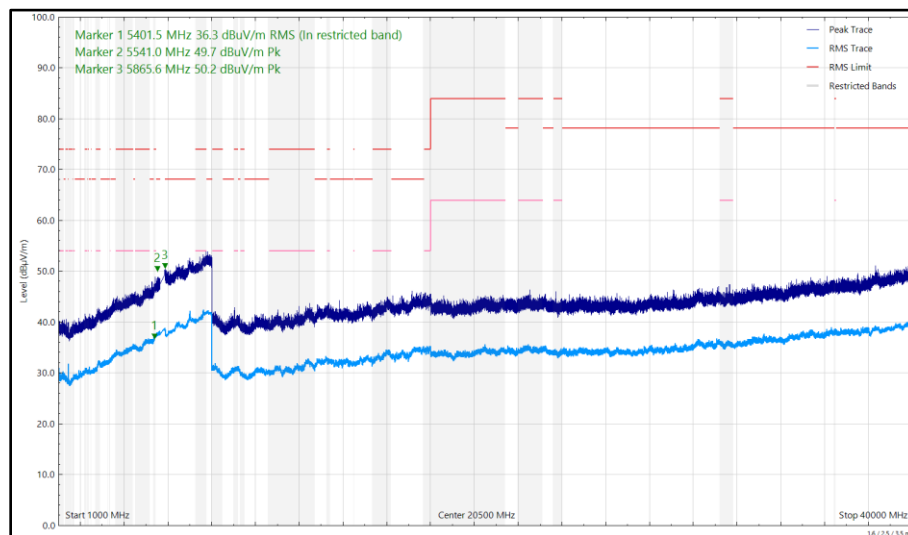


Figure 754 - U-NII-3 - 5745 MHz (CH149), HE20, RU26-0, CDD, Core 0 + Core 1, 1 GHz to 40 GHz, Horizontal

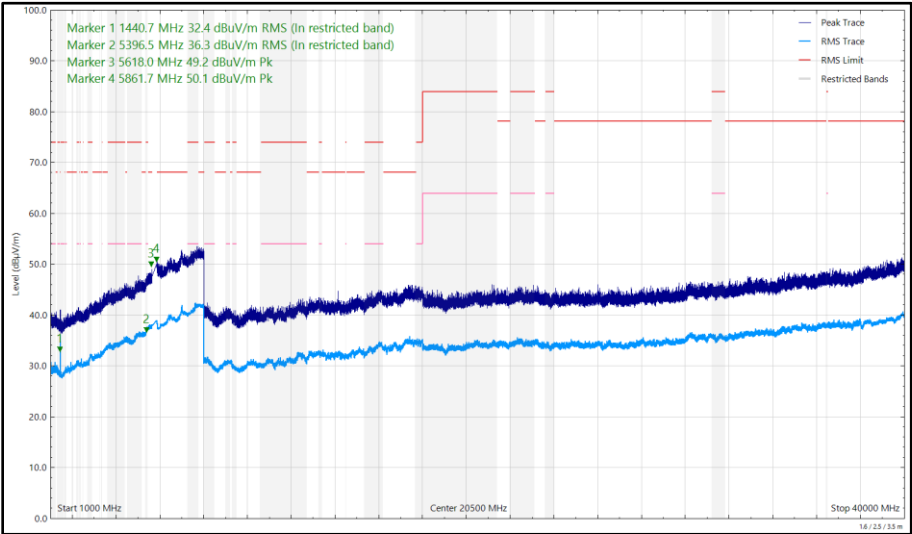


Figure 755 - U-NII-3 - 5745 MHz (CH149), HE20, RU26-0, CDD, Core 0 + Core 1, 1 GHz to 40 GHz, Vertical

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
40.996	15.87	40.00	-24.13	Q-Peak	149	155	Vertical
1440.556	30.26	54.00	-23.74	RMS	127	378	Vertical
5403.870	36.26	54.00	-17.74	RMS	0	200	Horizontal
5453.158	36.40	54.00	-17.60	RMS	301	333	Vertical
5713.711	50.25	68.20	-17.95	Peak	354	347	Vertical
5718.463	49.73	68.20	-18.47	Peak	123	102	Horizontal
6098.577	49.75	68.20	-18.45	Peak	89	300	Vertical

Table 716 - U-NII-3 - 5825 MHz (CH165), HE20, RU26-0, CDD, Core 0 + Core 1, 30 MHz to 40 GHz

No other emissions found within 10 dB of the limit.

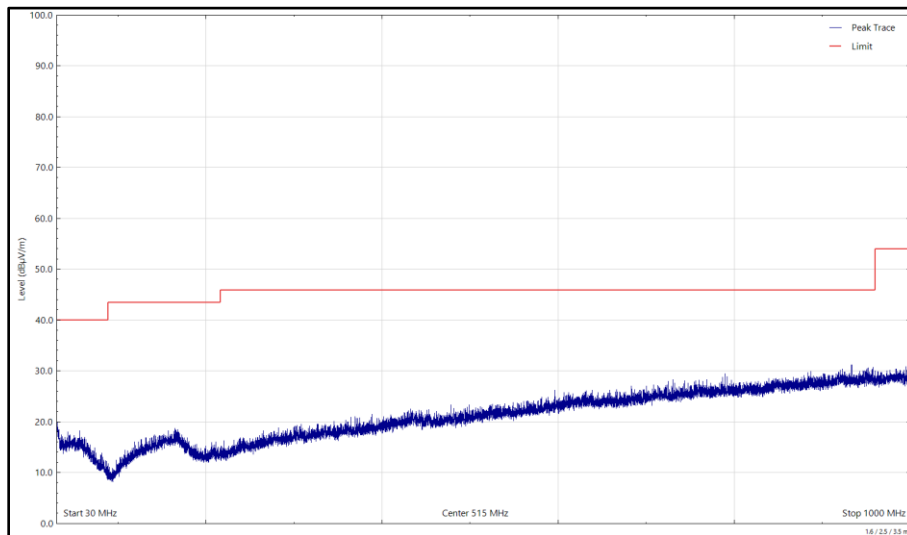


Figure 756 - U-NII-3 - 5825 MHz (CH165), HE20, RU26-0, CDD, Core 0 + Core 1, 30 MHz to 1 GHz, Horizontal (Peak)

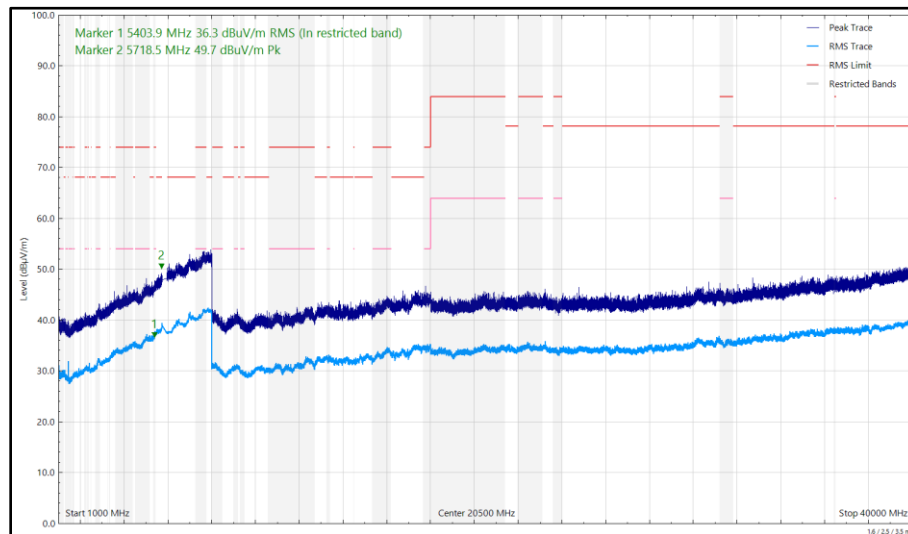


Figure 757 - U-NII-3 - 5825 MHz (CH165), HE20, RU26-0, CDD, Core 0 + Core 1, 1 GHz to 40 GHz, Horizontal

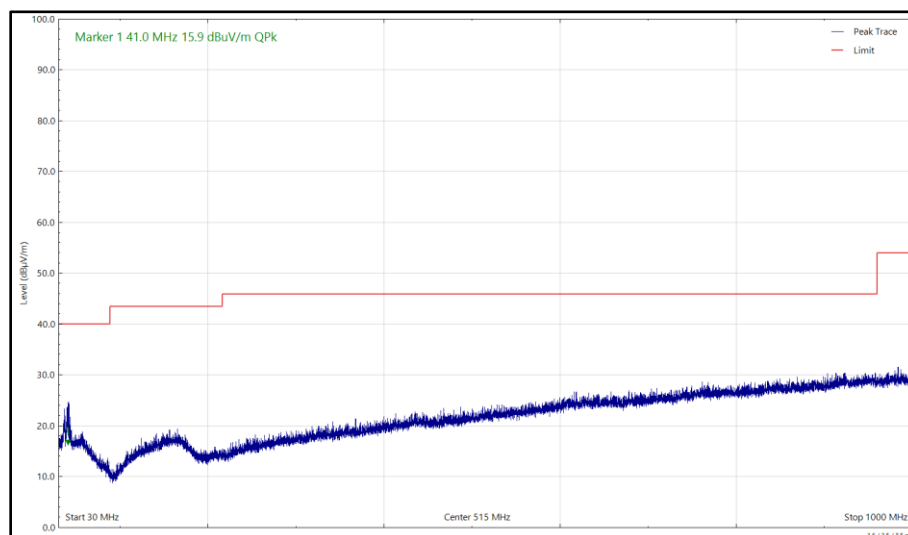


Figure 758 - U-NII-3 - 5825 MHz (CH165), HE20, RU26-0, CDD, Core 0 + Core 1, 30 MHz to 1 GHz, Vertical (Peak)

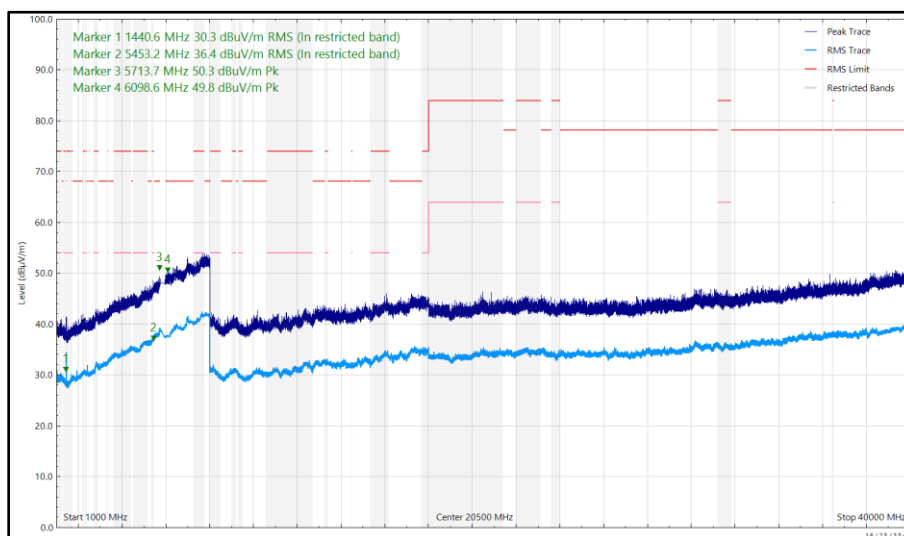


Figure 759 - U-NII-3 - 5825 MHz (CH165), HE20, RU26-0, CDD, Core 0 + Core 1, 1 GHz to 40 GHz, Vertical

FCC 47 CFR Part 15, Limit Clause 15.407(b)(1)(2)(3)(4)

Emissions not falling within the restricted bands listed in FCC 47 CFR Part 15.209:

For transmitters operating in the 5.15-5.25 GHz band: ≤ -27 dBm/MHz outside 5150-5350 MHz.

For transmitters operating in the 5.25-5.35 GHz band: ≤ -27 dBm/MHz outside 5150-5350 MHz.

For transmitters operating in the 5.47-5.725 GHz band: ≤ -27 dBm/MHz outside 5470-5725 MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Emissions within the restricted bands listed in FCC 47 CFR Part 15.209:

Frequency (MHz)	Field Strength (μ V/m) at 3m	Field Strength Limit (dB μ V/m) at 3m
30 to 88	100	40.00
88 to 216	150	43.52
216 to 960	200	46.02
Above 960	500	53.98

Table 717 - Radiated Emissions Limit Table (FCC)



ISED RSS-247, Limit Clause 6.2.1.2, 6.2.2.2, 6.2.3.2 and 6.2.4.2 and ISED RSS-GEN, Limit Clause 8.9

Emissions not falling within the restricted bands listed in ISED RSS-GEN, Clause 8.10:

For transmitters with operating frequencies in the band 5150-5250 MHz, all emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p. Any unwanted emissions that fall into the band 5250-5350 MHz shall be attenuated below the channel power by at least 26 dB.

For transmitters with operating frequencies in the bands 5250-5350 MHz and 5470-5725 MHz, all emissions outside the band 5250-5350 MHz and 5470-5725 MHz shall not exceed -27 dBm/MHz e.i.r.p.

Devices operating in the band 5725-5850 MHz shall have e.i.r.p. of unwanted emissions comply with the following:

- a) 27 dBm/MHz at frequencies from the band edges decreasing linearly to 15.6 dBm/MHz at 5 MHz above or below the band edges;
- b) 15.6 dBm/MHz at 5 MHz above or below the band edges decreasing linearly to 10 dBm/MHz at 25 MHz above or below the band edges;
- c) 10 dBm/MHz at 25 MHz above or below the band edges decreasing linearly to -27 dBm/MHz at 75 MHz above or below the band edges; and
- d) -27 dBm/MHz at frequencies more than 75 MHz above or below the band edges.

Emissions falling within the restricted bands listed in ISED RSS-GEN, Clause 8.10:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$) at 3m	Field Strength Limit ($\text{dB}\mu\text{V/m}$) at 3m
30 to 88	100	40.00
88 to 216	150	43.52
216 to 960	200	46.02
Above 960	500	53.98

Table 718 - Radiated Emissions Limit Table (ISED)

For the 5895 MHz band edge and above, all devices shall be measured using average detection and shall comply with the following e.i.r.p. spectral density limits:

Fixed outdoor access points and fixed outdoor client devices shall not exceed -27 dBm/MHz e.i.r.p. spectral density at or above the 5895 MHz band edge.

Indoor access points or indoor subordinate devices shall not exceed 15 dBm/MHz e.i.r.p. spectral density at the 5895 MHz band edge and shall decrease linearly to not exceed -7 dBm/MHz e.i.r.p. spectral density at or above 5925 MHz.

Client devices shall not exceed -5 dBm/MHz e.i.r.p. spectral density at the 5895 MHz band edge and shall decrease linearly to not exceed -27 dBm/MHz e.i.r.p. spectral density at or above 5925 MHz.



2.6.8 Test Location and Test Equipment Used

This test was carried out in RF Chamber 18.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
Emissions Software	TUV SUD	EmX V3.2.0	5125	-	Software
Cable (N to N 1m)	Junkosha	MWX221-01000AMSAMS/B	6009	12	20-May-2025
SAC Switch Unit	TUV SUD	TUV_SSU_001	6144	12	11-Dec-2024
Digital Multimeter	Fluke	115	6146	12	06-Jun-2025
8GHz Highpass Filter	Wainwright	WHKX 7150 8000 18000 50SS	6194	12	23-Apr-2025
Pre Amp 8 - 18 GHz	Wright Technologies	APS06 0061	6200	12	03-Jun-2025
Attenuator 4dB	Pasternack	PE7074-4	6204	24	20-Jun-2026
Cable (SMA to SMA 20cm)	TUV SUD	MH-FH 8-18	6215	12	23-Apr-2025
Cable (SMA to SMA 8m)	Junkosha	MWX221-08000AMSAMS/B	6318	12	18-Feb-2025
Cable (K Type 2m)	Junkosha	MWX241-02000KMSKMS/B	6323	12	04-Feb-2025
EMC Test Receiver	Rohde & Schwarz	ESW44	6333	12	16-Feb-2025
Trilog Super Broadband Test Antenna	Schwarzbeck	VULB 9168	6456	24	10-Feb-2025
DRG Horn Antenna (8-18 GHz)	Schwarzbeck	HWRD750	6458	12	05-May-2025
Humidity and Temperature Meter	R.S Components	1364	6486	12	04-Jun-2025
3m Semi-Anechoic Chamber , Chamber18	Albatross Projects	Chamber 18	6597	36	07-Feb-2026
Double Ridge Active Horn Antenna (18-40 GHz)	Com-Power	AHA-840	6771	24	17-Jan-2025
Mast & Turntable Controller	Maturo Gmbh	FCU3.0	6795	-	TU
Tilt Antenna Mast	Maturo Gmbh	BAM4.5-P	6796	-	TU
Turntable	Maturo Gmbh	TT1.5SI	6797	-	TU
AC Programmable Power Supply	iTech	IT7324	6812	-	O/P Mon
Broad-Band Horn Antenna 1-10GHz N	Schwarzbeck	BBHA9120B	6825	12	18-Jul-2025

Table 719

TU - Traceability Unscheduled

O/P Mon - Output Monitored using calibrated equipment



2.7 Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period

2.7.1 Specification Reference

FCC 47 CFR Part 15E, Clause 15.407 (h)(2)(iii)(iv)
ISED RSS-247, Clause 6.3.2(c)(d)(e)

2.7.2 Equipment Under Test and Modification State

A3143, S/N: KF7HX3N4PJ - Modification State 0

2.7.3 Date of Test

01-July-2024 to 02-July-2024

2.7.4 Test Method

This test was performed in accordance with FCC KDB 905462 D02, clause 7.8.3.

Radar Pulse Type 0 was then transmitted, and the Spectrum monitored. The transmissions from the UUT were observed for a period of 12 seconds after the final injected Radar Pulse.

It was checked that all transmissions stopped within the 10 second period defined from the point of the end of the final Radar pulse + 10 seconds. In addition, the aggregate on time during the first 200ms and the following 9.8 seconds of the Channel Move Time was computed.

The markers on the trace data correspond to the following time periods:

Yellow - End Of Radar Burst, (T0)

Purple - End Of Channel Move Time, (T0 + 10 seconds)

To verify the non-occupancy period, the external trigger was used to trigger a 30-minute sweep from the moment the radar burst sequence was injected. It was verified that no transmissions occurred on the test channel during this time period.

2.7.5 Environmental Conditions

Ambient Temperature 23.7 - 24.4 °C

Relative Humidity 32.1 - 37.9 %

2.7.6 Test Results

5 GHz WLAN – Master to Client

The equipment under test was a Client without Radar Detection.

This test was performed in the following mode of operation: 802.11ax HE160.

The equipment was set up as shown in the diagram below. The EUT was configured to run iPerf, transmitting UDP to the client laptop. The channel loading was set to >17% by adjusting the bandwidth specified in the iPerf UDP transfer.

To calibrate the level of the radar at the input to the companion device, the companion device was replaced by the spectrum analyser and the output of the signal generator adjusted to give -62 dBm.

Radar Type	Pulse Width (μ s)	PRI (μ s)	Number of Pulses
0	1	1428	18

Table 720 - Radar Pulse Type 0 Characteristics

Manufacturer	Model	Serial Number	FCC ID
ASUS	GT-AXE11000	M8IG0X400285XVN	MSQ-RTAXJF00

Table 721 - Details of Master Device used to support testing

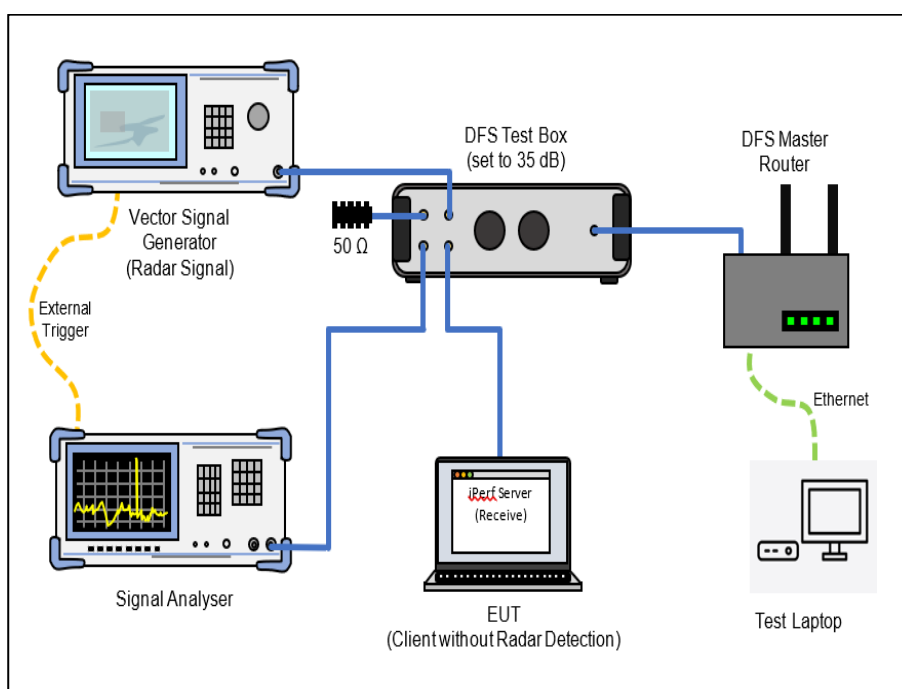


Figure 760 - Test Equipment Setup Diagram for Client without Radar Detection with Injection at the Master



Figure 761 - Verification of Radar Type 0

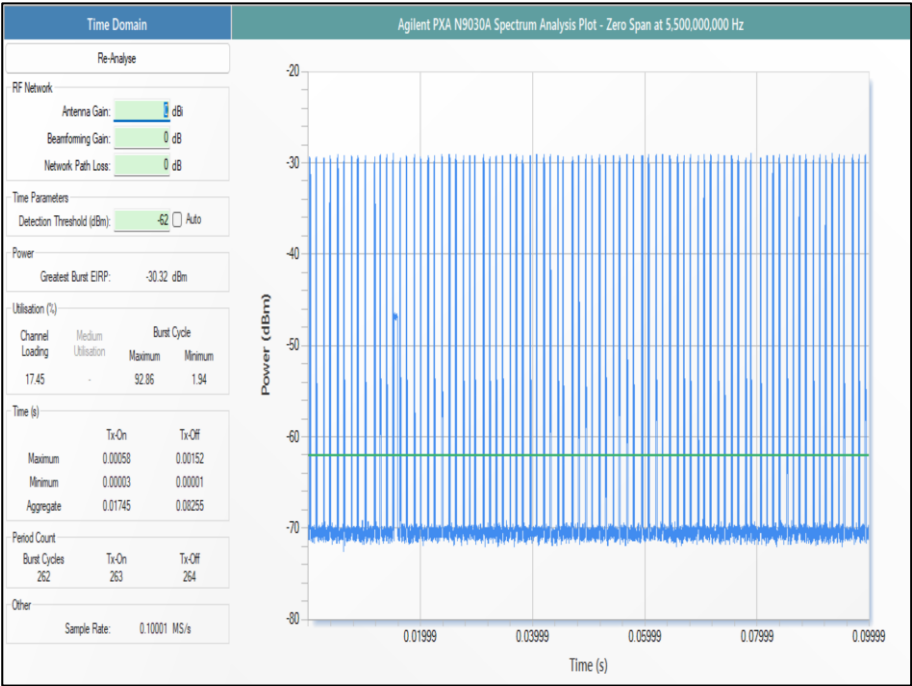


Figure 762 - Channel Loading

The channel loading was 17.45%

Maximum Transmit Power	Value (Notes 1 and 2)
≥ 200 milliwatt	-64 dBm
< 200 milliwatt	-62 dBm
Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna. Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.	

Table 722 - DFS Detection Thresholds for Master Devices and Client Devices with Radar Detection

Test Parameter	Result
Test Channel	CH106 (5530 MHz), Control CH36 (5500 MHz)
Channel Move Time	0.083 s
Channel Closing Time (Aggregate Time During 200 ms)	1.680 ms
Channel Closing Time (Aggregate Time During 200 ms to 10 s)	0 ms
Channel Closing Time (Aggregate Time During 10 s)	1.680 ms
Transmission Observed During Non-Occupancy Period	No

Table 723 - In-Service Monitoring Test Results

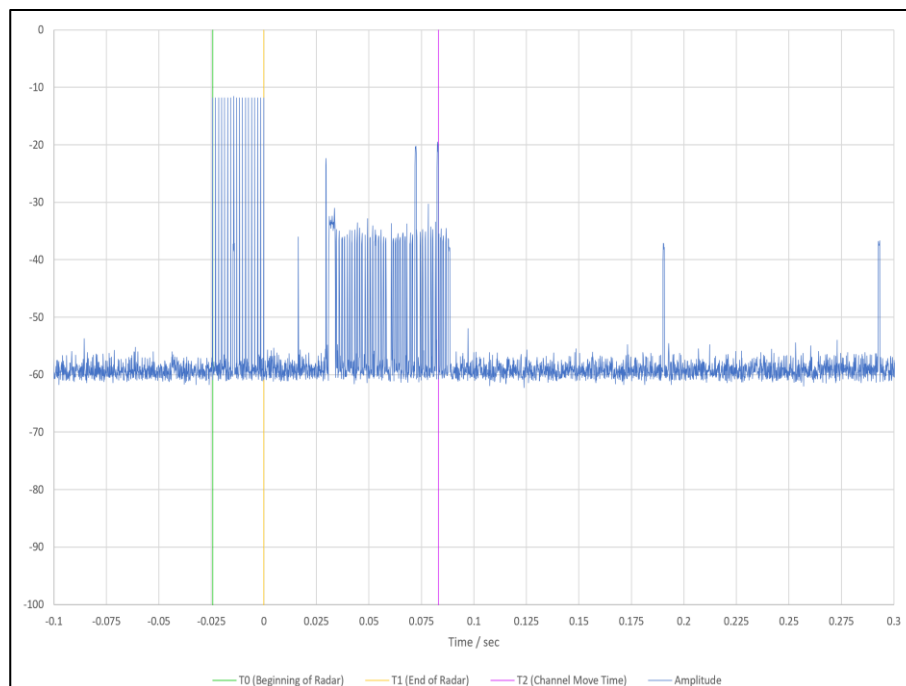


Figure 763 - First 200 ms of Channel Shutdown Period

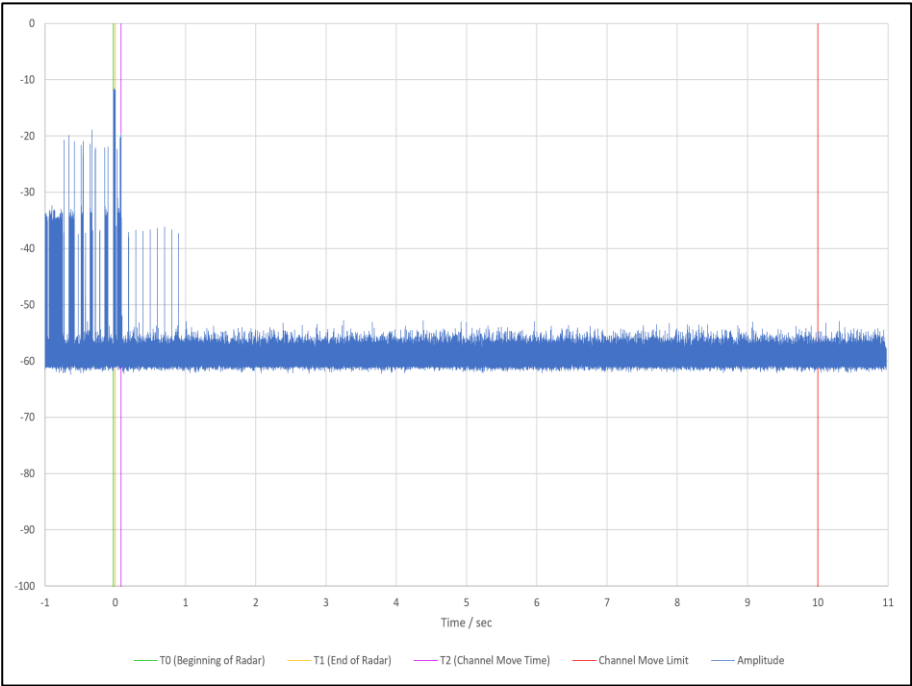


Figure 764 - First 12 s of Channel Shutdown Period

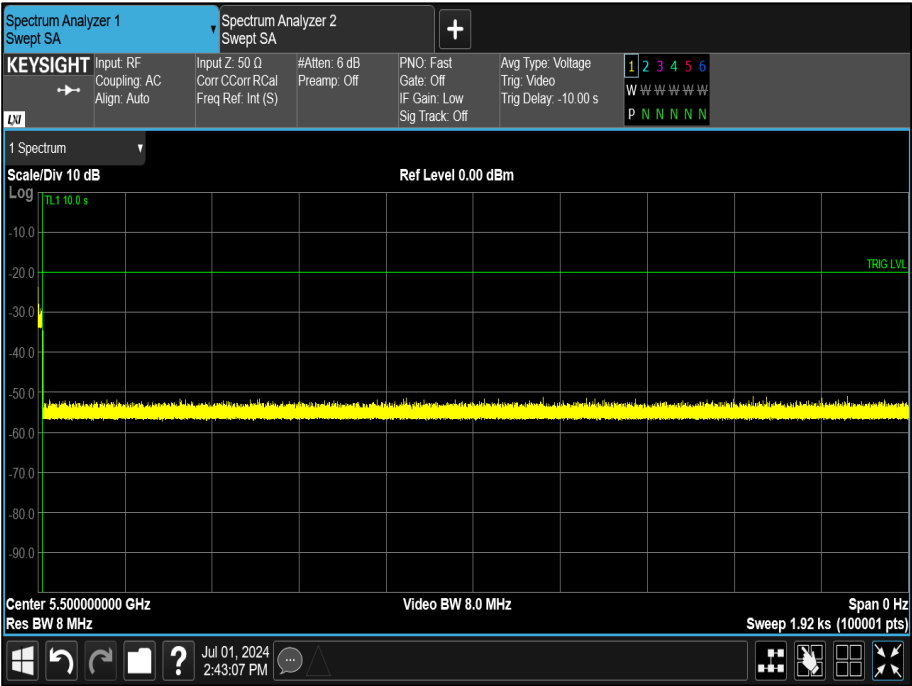


Figure 765 - 30 minute Non-Occupancy Period



5 GHz WLAN - Client to Client

The equipment under test was a Client without Radar Detection.

This test was performed in the following mode of operation: 802.11ac VHT80.

The equipment was set up as shown in the diagram below. The EUT and a 2nd client device were both connected to the DFS Master device. The 2nd client device was set to stream video directly to the EUT using the AirPlay protocol, while under the supervision of the DFS master (but without the DFS master re-transmitting the data packets). The channel loading was checked to ensure it was >17%.

To calibrate the level of the radar at the input to the DFS Master, the DFS Master device was replaced by the spectrum analyser and the output of the vector signal generator adjusted to give -62 dBm.

Radar Type	Pulse Width (µs)	PRI (µs)	Number of Pulses
0	1	1428	18

Table 724 - Radar Pulse Type 0 Characteristics

Manufacturer	Model	Serial Number	FCC ID
ASUS	GT-AXE11000	N5IG0X400280MY7	MSQ-RTAXJF00

Table 725 - Details of Master Device used to support testing

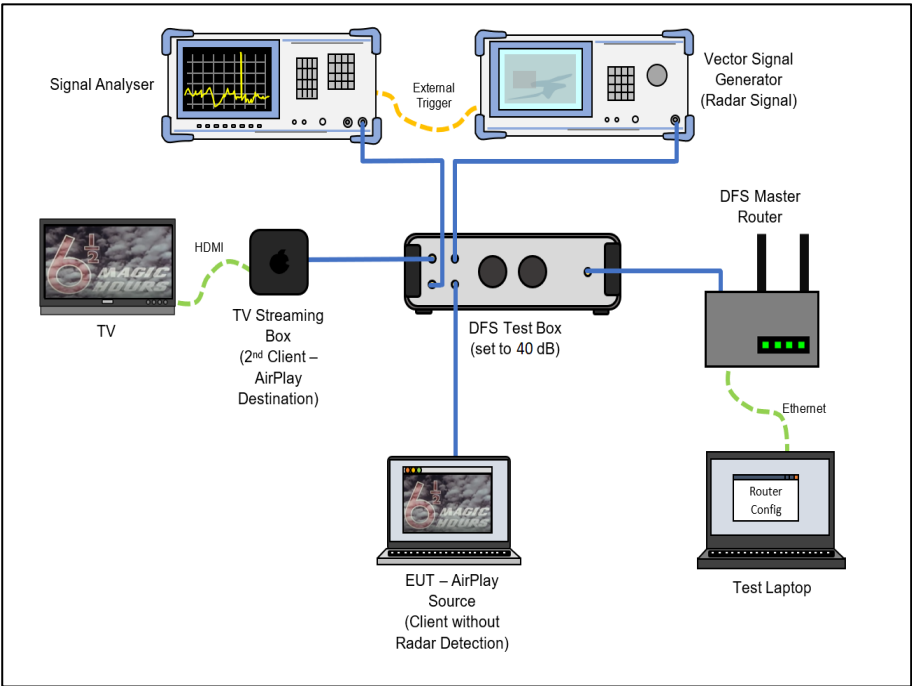


Figure 766 - Test Equipment Setup Diagram for Client without Radar Detection with Injection at the Master

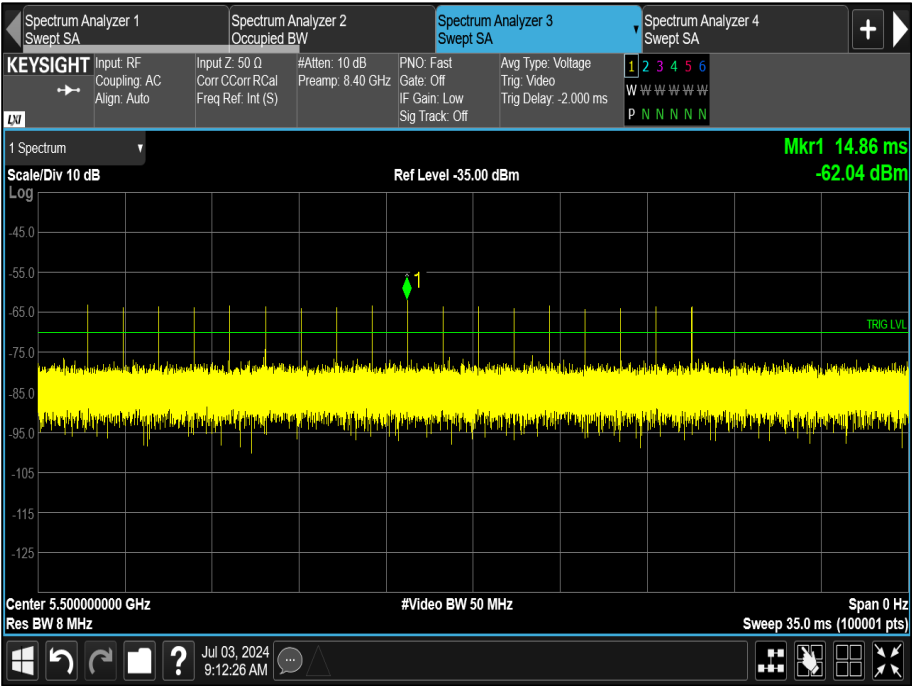


Figure 767 - Verification of Radar Type 0

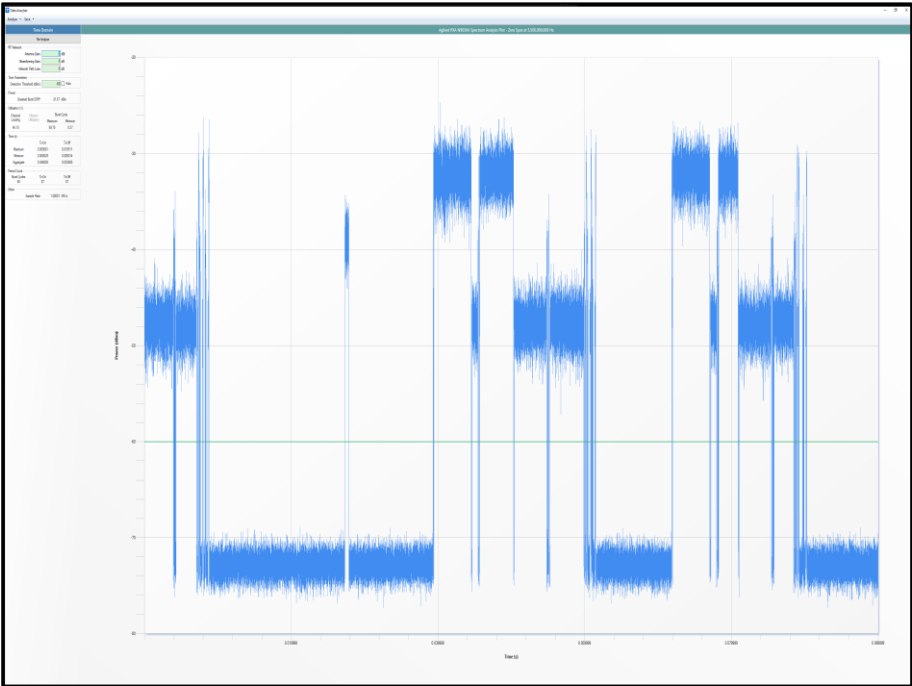


Figure 768 - Channel Loading

The channel loading was 46.10%



Maximum Transmit Power	Value (Notes 1 and 2)
≥ 200 milliwatt	-64 dBm
< 200 milliwatt	-62 dBm
Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna. Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.	

Table 726 - DFS Detection Thresholds for Master Devices and Client Devices with Radar Detection

Test Parameter	Result
Test Channel	CH106 (5530 MHz), Control CH100, (5500 MHz)
Channel Move Time	0.024
Channel Closing Time (Aggregate Time During 200 ms)	12.240
Channel Closing Time (Aggregate Time During 200 ms to 10 s)	0.000
Channel Closing Time (Aggregate Time During 10 s)	12.240
Transmission Observed During Non-Occupancy Period	Yes

Table 727 - In-Service Monitoring Test Results

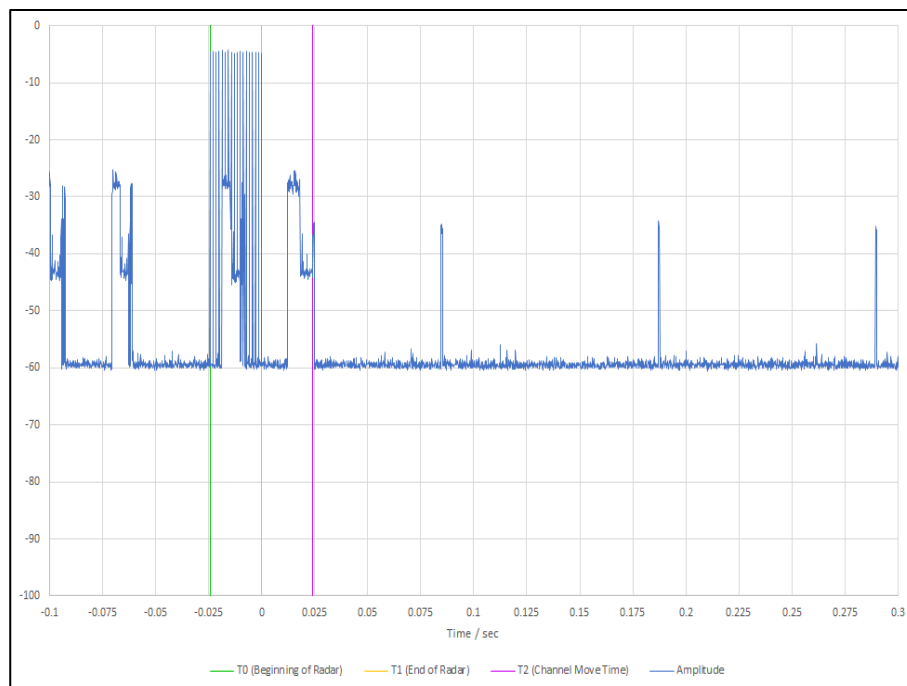


Figure 769 - First 200 ms of Channel Shutdown Period

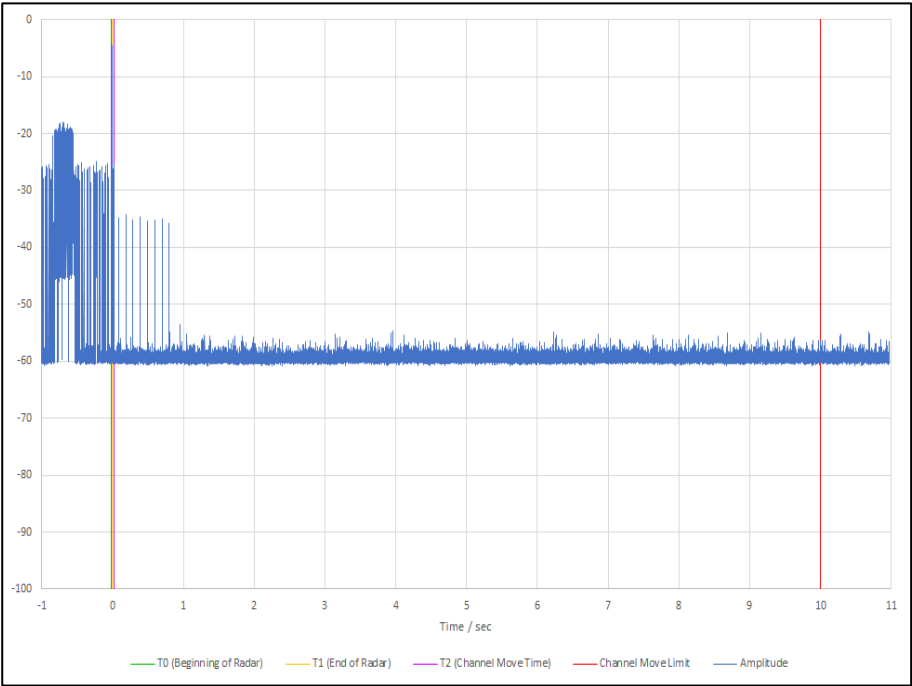


Figure 770 - First 12 s of Channel Shutdown Period

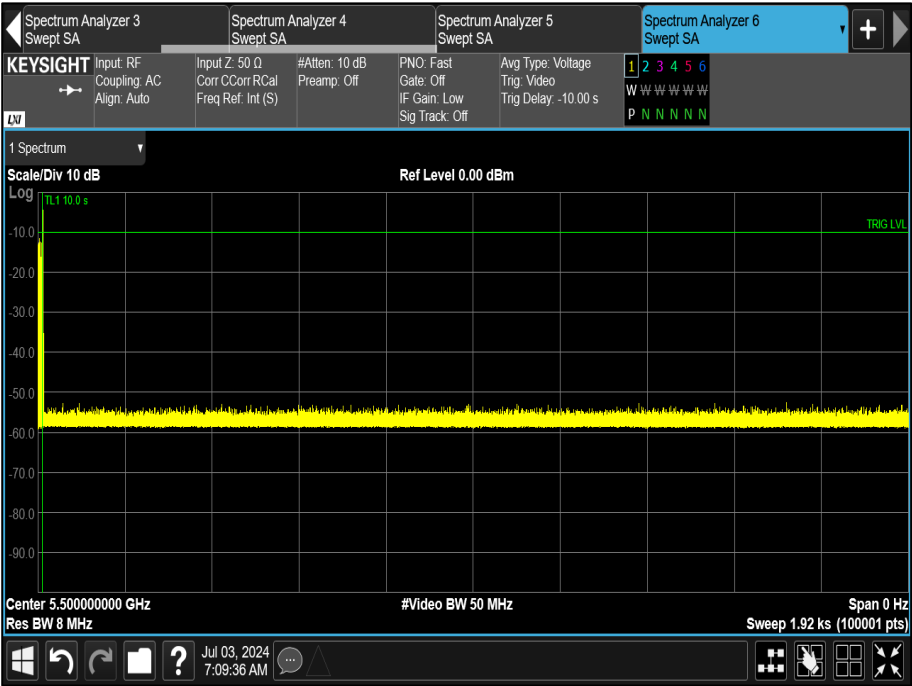


Figure 771 - 30 minute Non-Occupancy Period



FCC 47 CFR Part 15, Limit Clause 15.407 (h)(2)(iii)

Channel Move Time	<10 seconds
Channel Closing Time (Aggregate Time During 200ms)	<200 ms
Channel Closing Time (Aggregate Time During +200ms to 10s)	<60 ms

Table 728 - Channel Move Time and Channel Closing Transmission Time Limit

FCC 47 CFR Part 15, Limit Clause 15.407 (h)(2)(iv)

Non-occupancy Period	> 30 minutes
----------------------	--------------

Table 729 - Non-Occupancy Limit

ISED RSS-247, Limit Clause 6.3.2

Devices shall comply with the following requirements, however, the requirement for in-service monitoring does not apply to slave devices without radar detection.

In-service monitoring: an LE-LAN device shall be able to monitor the operating channel to check that a co-channel radar has not moved or started operation within range of the LE-LAN device. During in-service monitoring, the LE-LAN radar detection function continuously searches for radar signals between normal LE-LAN transmissions.

Channel availability check time: the device shall check whether there is a radar system already operating on the channel before it initiates a transmission on a channel and when it moves to a channel. The device may start using the channel if no radar signal with a power level greater than the interference threshold value specified in Section 6.3.1 above is detected within 60 seconds. This requirement only applies in the master operational mode.

Channel move time: after a radar signal is detected, the device shall cease all transmissions on the operating channel within 10 seconds.

Channel closing transmission time: is comprised of 200 ms starting at the beginning of the channel move time plus any additional intermittent control signals required to facilitate a channel move (an aggregate of 60 ms) over the remaining 10-second period of the channel move time.

Non-occupancy period: a channel that has been flagged as containing a radar signal, either by a channel availability check or in-service monitoring, is subject to a 30-minute non-occupancy period where the channel cannot be used by the LE-LAN device. The non-occupancy period starts from the time that the radar signal is detected.



2.7.7 Test Location and Test Equipment Used

This test was carried out in Shielded Laboratory 1.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
Cable (18 GHz)	Rosenberger	LU7-071-1000	5103	12	21-Dec-2024
3.5 mm 1m Cable	Junkosha	MWX221-01000DMS	5416	12	07-Mar-2025
3.5 mm 2m Cable	Junkosha	MWX221-02000DMS	5427	12	23-May-2025
3.5 mm 2m Cable	Junkosha	MWX221-02000DMS	5430	12	16-May-2025
Vector Signal Generator	Rohde & Schwarz	SMM100A	5915	36	01-Mar-2026
WiFi 6E Tri-Band Gaming Router	Asus	GT-AXE110000	5926	-	TU
Humidity & Temperature meter	R.S Components	1364	6148	12	21-Jul-2024
MXA Signal Analyzer	Keysight Technologies	N9020B	6415	24	22-Mar-2025
WiFi 6E Tri-Band Gaming Router	Asus	GT-AXE110000	6251	-	TU
MXA Signal Analyzer	Keysight Technologies	N9020B	6415	24	22-Mar-2025
MXA Signal Analyser	Keysight Technologies	N9020B	6418	24	27-Feb-2025
Test Coupling Network	TUV SUD	TUV_RxTest_001	6441	12	30-Apr-2025

Table 730

TU - Traceability Unscheduled



3 Measurement Uncertainty

For a 95% confidence level, the measurement uncertainties for defined systems are:

Test Name	Measurement Uncertainty
Restricted Band Edges	± 6.3 dB
Emission Bandwidth	± 3.914 MHz
Maximum Conducted Output Power	± 1.38 dB
Maximum Conducted Power Spectral Density	± 1.49 dB
Authorised Band Edges	± 6.3 dB
Spurious Radiated Emissions	30 MHz to 1 GHz: ± 5.2 dB 1 GHz to 40 GHz: ± 6.3 dB
Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period	Time: ± 0.47 % Power: ± 1.29 dB

Table 731

Measurement Uncertainty Decision Rule – Accuracy Method

Determination of conformity with the specification limits is based on the decision rule according to IEC Guide 115:2021, Clause 4.4.3 (Procedure 2). The measurement results are directly compared with the test limit to determine conformance with the requirements of the standard.

Risk: The uncertainty of measurement about the measured result is negligible with regard to the final pass/fail decision. The measurement result can be directly compared with the test limit to determine conformance with the requirement (compare IEC Guide 115). The level of risk to falsely accept and falsely reject items is further described in ILAC-G8.