



Mode: 802.11ax OFDMA
 Transfer Rate: MCS9
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2422MHz
 Channel: 3

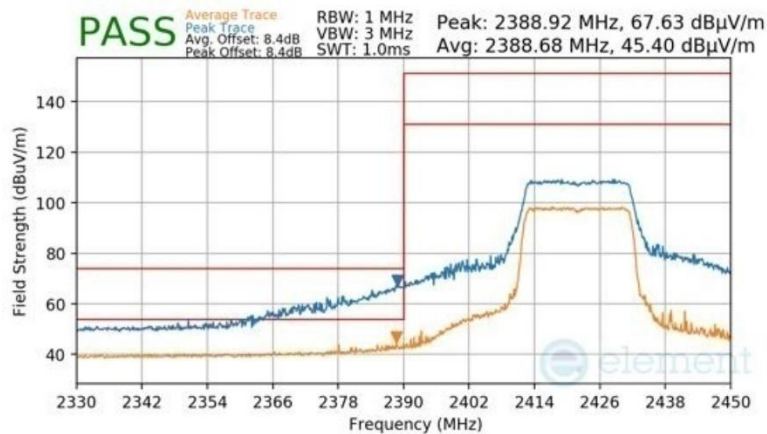

Plot 7-218 Radiated Restricted Lower Band Edge Measurement Antenna 1 Dedicated (Peak & Average – RU242)


Mode: 802.11ax OFDMA
 Transfer Rate: MCS9
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2427MHz
 Channel: 4

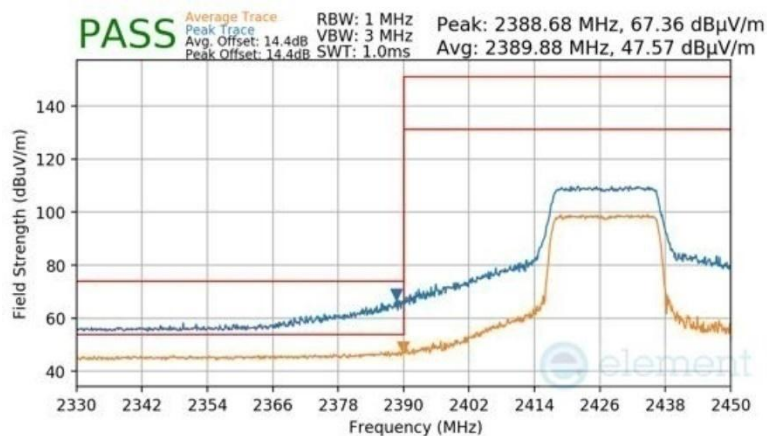

Plot 7-219 Radiated Restricted Lower Band Edge Measurement Antenna 1 Dedicated (Peak & Average – RU242)


FCC ID: BCGA3218 IC: 579C-A3218	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 10/14/2024 - 1/15/2025	EUT Type: Smart Speaker with Display	Approved by: Technical Manager
Test Report S/N: 1C2410280081-05-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 161 of 199

Mode: 802.11ax OFDMA
 Transfer Rate: MCS9
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2432MHz
 Channel: 5

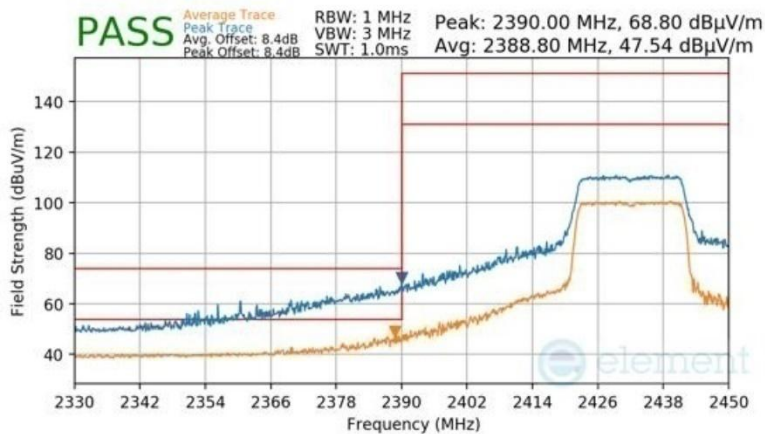

Plot 7-220 Radiated Restricted Lower Band Edge Measurement Antenna 1 Dedicated (Peak & Average – RU242)


Mode: 802.11ax OFDMA
 Transfer Rate: MCS9
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2437MHz
 Channel: 6

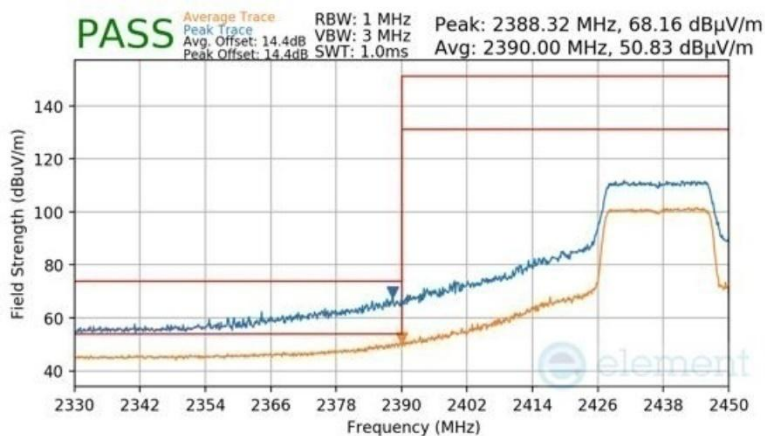

Plot 7-221 Radiated Restricted Lower Band Edge Measurement Antenna 1 Dedicated (Peak & Average – RU242)


FCC ID: BCGA3218 IC: 579C-A3218	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 10/14/2024 - 1/15/2025	EUT Type: Smart Speaker with Display	Approved by: Technical Manager
Test Report S/N: 1C2410280081-05-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 162 of 199

Mode: 802.11ax OFDMA
 Transfer Rate: MCS9
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2437MHz
 Channel: 6

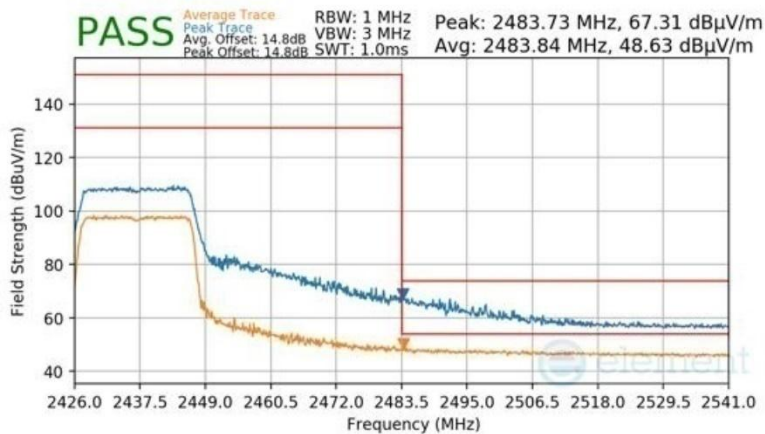

Plot 7-222 Radiated Restricted Upper Band Edge Measurement Antenna 1 Dedicated (Peak & Average – RU242)


Mode: 802.11ax OFDMA
 Transfer Rate: MCS9
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2442MHz
 Channel: 7

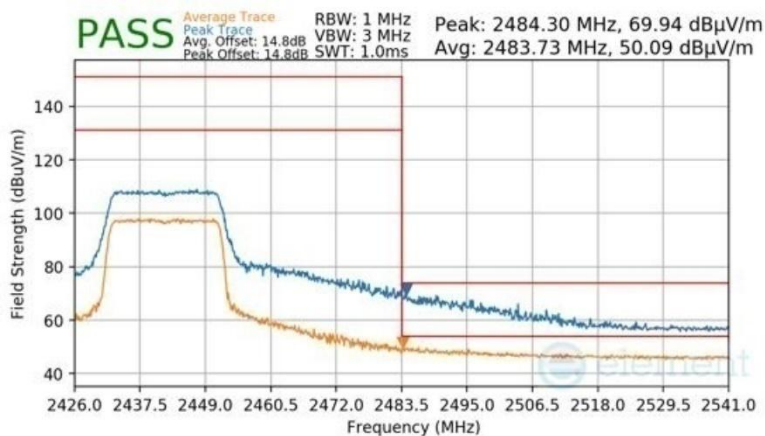

Plot 7-223 Radiated Restricted Upper Band Edge Measurement Antenna 1 Dedicated (Peak & Average – RU242)


FCC ID: BCGA3218 IC: 579C-A3218	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 10/14/2024 - 1/15/2025	EUT Type: Smart Speaker with Display	Approved by: Technical Manager
Test Report S/N: 1C2410280081-05-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 163 of 199

Mode: 802.11ax OFDMA
 Transfer Rate: MCS9
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2447MHz
 Channel: 8

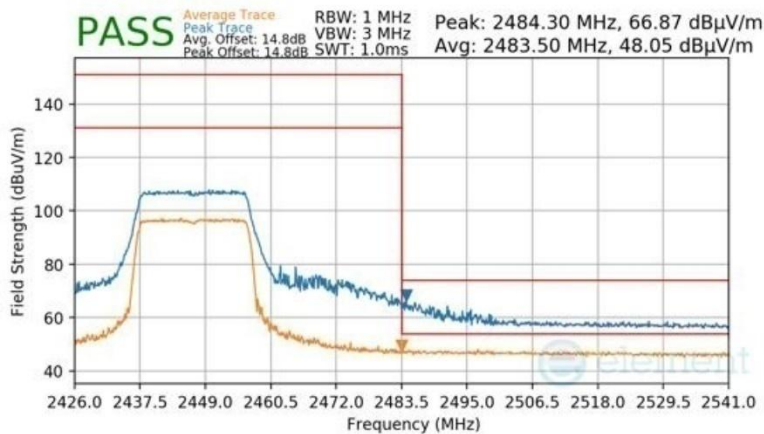

Plot 7-224 Radiated Restricted Upper Band Edge Measurement Antenna 1 Dedicated (Peak & Average – RU242)


Mode: 802.11ax OFDMA
 Transfer Rate: MCS9
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2452MHz
 Channel: 9

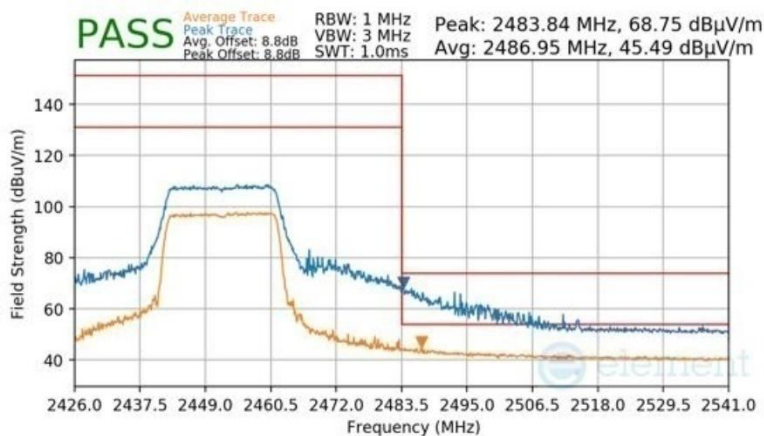

Plot 7-225 Radiated Restricted Upper Band Edge Measurement Antenna 1 Dedicated (Peak & Average – RU242)


FCC ID: BCGA3218 IC: 579C-A3218	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 10/14/2024 - 1/15/2025	EUT Type: Smart Speaker with Display	Approved by: Technical Manager
Test Report S/N: 1C2410280081-05-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 164 of 199

Mode: 802.11ax OFDMA
 Transfer Rate: MCS9
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2457MHz
 Channel: 10

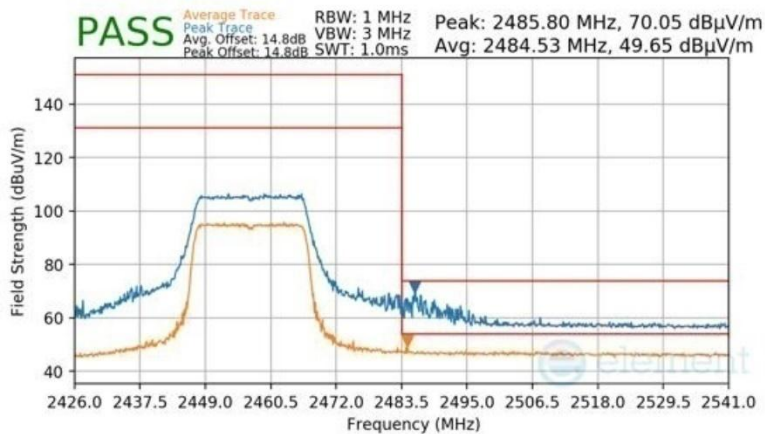

Plot 7-226 Radiated Restricted Upper Band Edge Measurement Antenna 1 Dedicated (Peak & Average – RU242)


Mode: 802.11ax OFDMA
 Transfer Rate: MCS9
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2462MHz
 Channel: 11

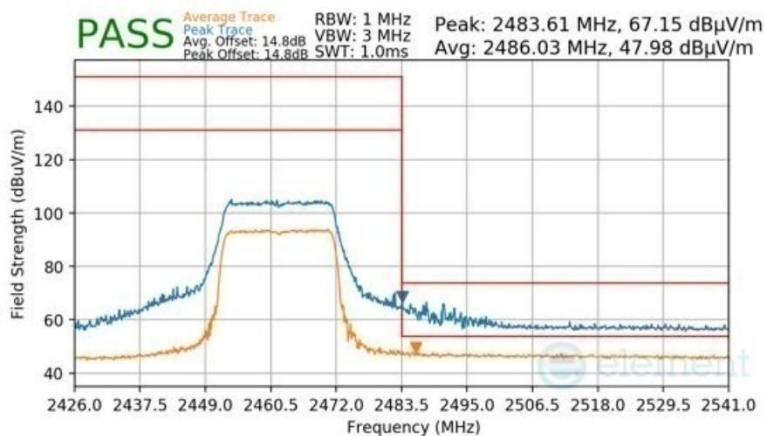

Plot 7-227 Radiated Restricted Upper Band Edge Measurement Antenna 1 Dedicated (Peak & Average – RU242)

FCC ID: BCGA3218 IC: 579C-A3218	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 10/14/2024 - 1/15/2025	EUT Type: Smart Speaker with Display	Approved by: Technical Manager
Test Report S/N: 1C2410280081-05-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 165 of 199

Mode: 802.11ax OFDMA
 Transfer Rate: MCS9
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2467MHz
 Channel: 12

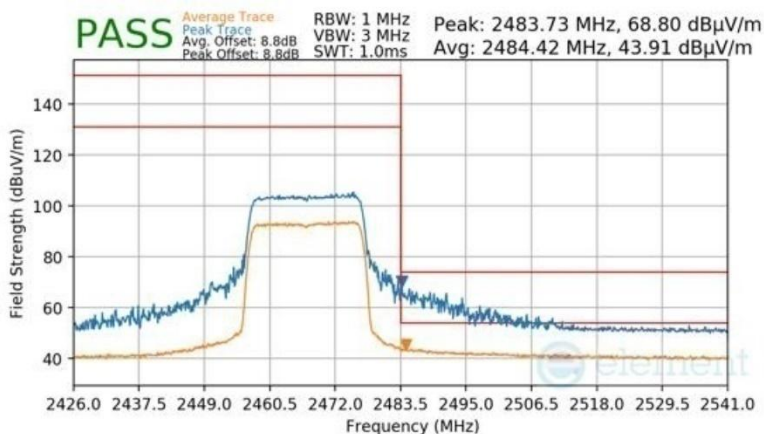

Plot 7-228 Radiated Restricted Upper Band Edge Measurement Antenna 1 Dedicated (Peak & Average – RU242)

FCC ID: BCGA3218 IC: 579C-A3218	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 10/14/2024 - 1/15/2025	EUT Type: Smart Speaker with Display	Approved by: Technical Manager
Test Report S/N: 1C2410280081-05-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 166 of 199


V 12.0 03/03/2026

7.8.6 CDD Common Radiated Restricted Band Edge Measurements

§15.205 §15.209; RSS-Gen [7.4.3]


RU26

Mode: 802.11ax OFDMA
 Transfer Rate: MCS9
 RU Index: 0
 Distance of Measurements: 3 Meters
 Operating Frequency: 2412MHz
 Channel: 1

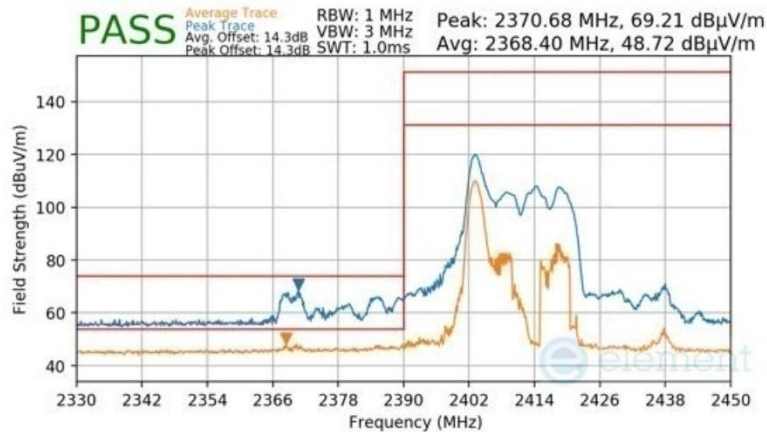

Plot 7-229 Radiated Restricted Lower Band Edge Measurement CDD Common (Peak & Average – RU26)

Mode: 802.11ax OFDMA
 Transfer Rate: MCS9
 RU Index: 8
 Distance of Measurements: 3 Meters
 Operating Frequency: 2412MHz
 Channel: 1

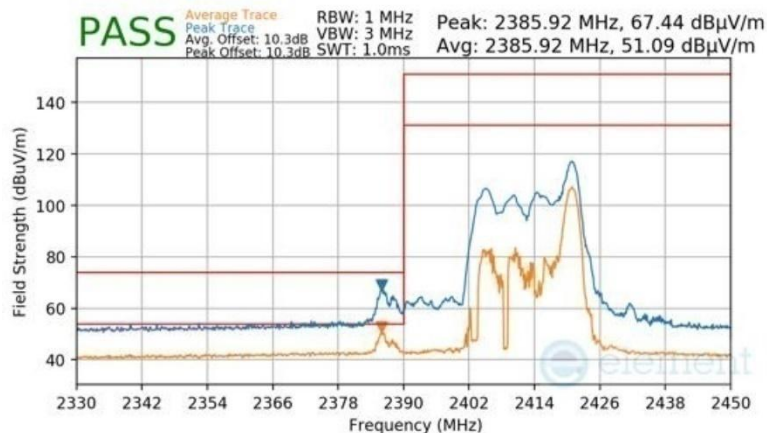


Plot 7-230 Radiated Restricted Lower Band Edge Measurement CDD Common (Peak & Average – RU26)

FCC ID: BCGA3218 IC: 579C-A3218	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 10/14/2024 - 1/15/2025	EUT Type: Smart Speaker with Display	Approved by: Technical Manager
Test Report S/N: 1C2410280081-05-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 167 of 199


V 12.0 03/03/2026

Mode: 802.11ax OFDMA
 Transfer Rate: MCS9
 RU Index: 0
 Distance of Measurements: 3 Meters
 Operating Frequency: 2462MHz
 Channel: 11

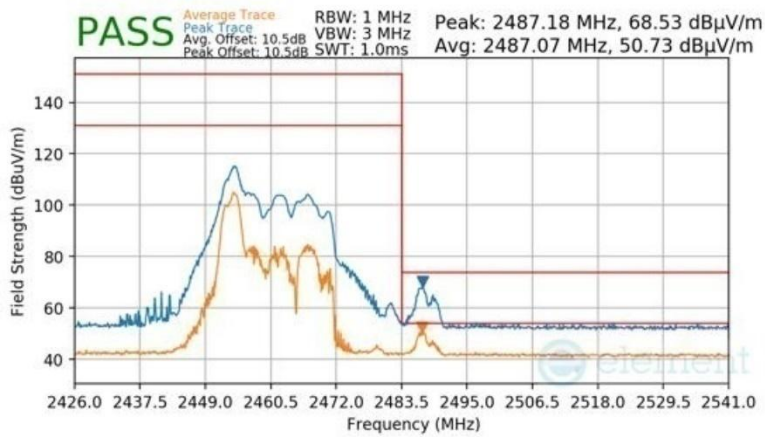

Plot 7-233 Radiated Restricted Upper Band Edge Measurement CDD Common (Peak & Average – RU26)


Mode: 802.11ax OFDMA
 Transfer Rate: MCS9
 RU Index: 8
 Distance of Measurements: 3 Meters
 Operating Frequency: 2462MHz
 Channel: 11

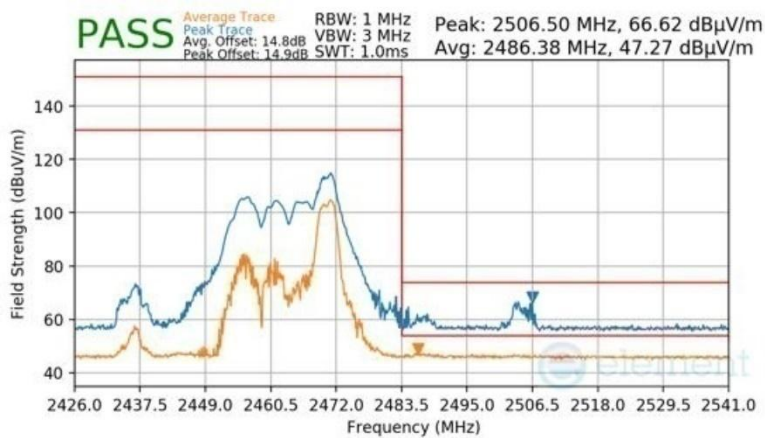

Plot 7-234 Radiated Restricted Upper Band Edge Measurement CDD Common (Peak & Average – RU26)


FCC ID: BCGA3218 IC: 579C-A3218	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 10/14/2024 - 1/15/2025	EUT Type: Smart Speaker with Display	Approved by: Technical Manager
Test Report S/N: 1C2410280081-05-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 169 of 199

Mode: 802.11ax OFDMA
 Transfer Rate: MCS9
 RU Index: 0
 Distance of Measurements: 3 Meters
 Operating Frequency: 2467MHz
 Channel: 12

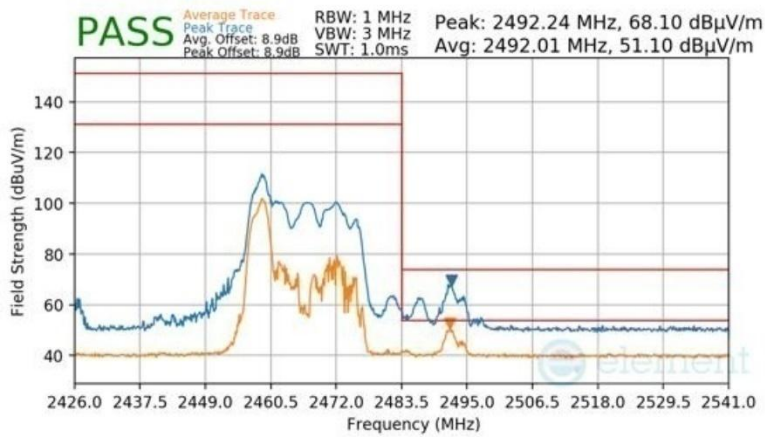

Plot 7-235 Radiated Restricted Upper Band Edge Measurement CDD Common (Peak & Average – RU26)

Mode: 802.11ax OFDMA
 Transfer Rate: MCS9
 RU Index: 8
 Distance of Measurements: 3 Meters
 Operating Frequency: 2467MHz
 Channel: 12

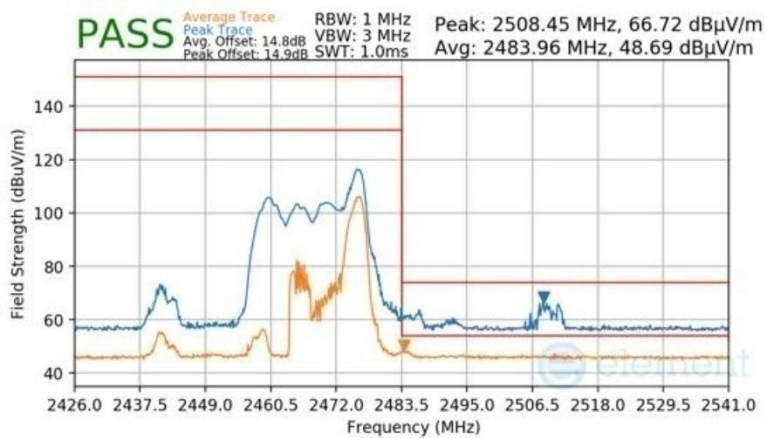


Plot 7-236 Radiated Restricted Upper Band Edge Measurement CDD Common (Peak & Average – RU26)

FCC ID: BCGA3218 IC: 579C-A3218	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 10/14/2024 - 1/15/2025	EUT Type: Smart Speaker with Display	Approved by: Technical Manager
Test Report S/N: 1C2410280081-05-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 170 of 199


RU242

Mode: 802.11ax OFDMA
 Transfer Rate: MCS9
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2412MHz
 Channel: 1

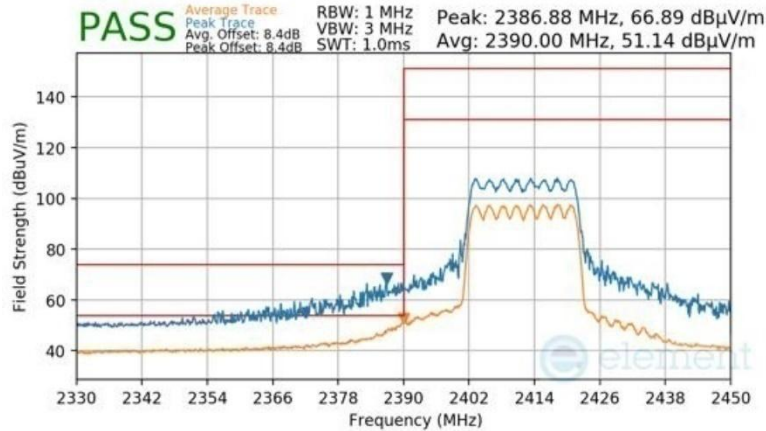

Plot 7-237 Radiated Restricted Lower Band Edge Measurement CDD Common (Peak & Average – RU242)


Mode: 802.11ax OFDMA
 Transfer Rate: MCS9
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2417MHz
 Channel: 2

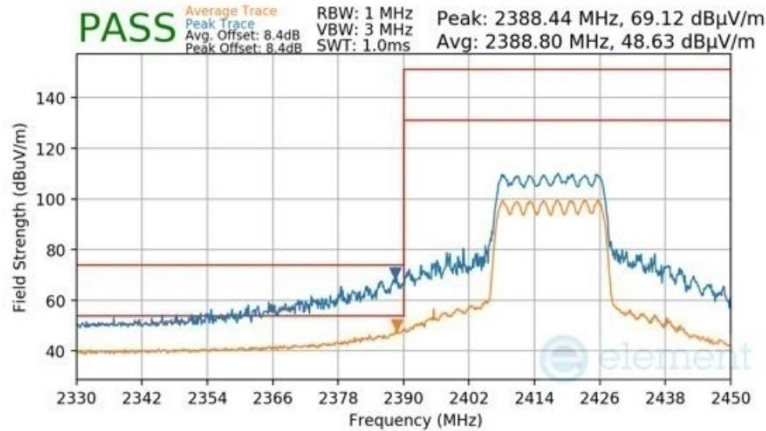

Plot 7-238 Radiated Restricted Lower Band Edge Measurement CDD Common (Peak & Average – RU242)


FCC ID: BCGA3218 IC: 579C-A3218	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 10/14/2024 - 1/15/2025	EUT Type: Smart Speaker with Display	Approved by: Technical Manager
Test Report S/N: 1C2410280081-05-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 171 of 199

Mode: 802.11ax OFDMA
 Transfer Rate: MCS9
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2422MHz
 Channel: 3

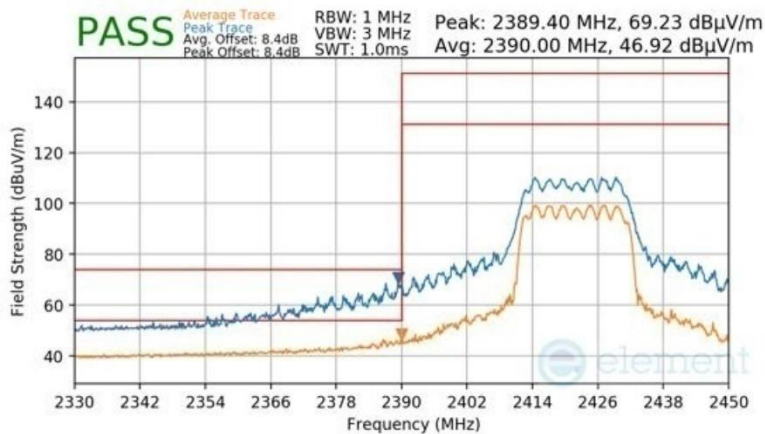

Plot 7-239 Radiated Restricted Lower Band Edge Measurement CDD Common (Peak & Average – RU242)

Mode: 802.11ax OFDMA
 Transfer Rate: MCS9
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2427MHz
 Channel: 4

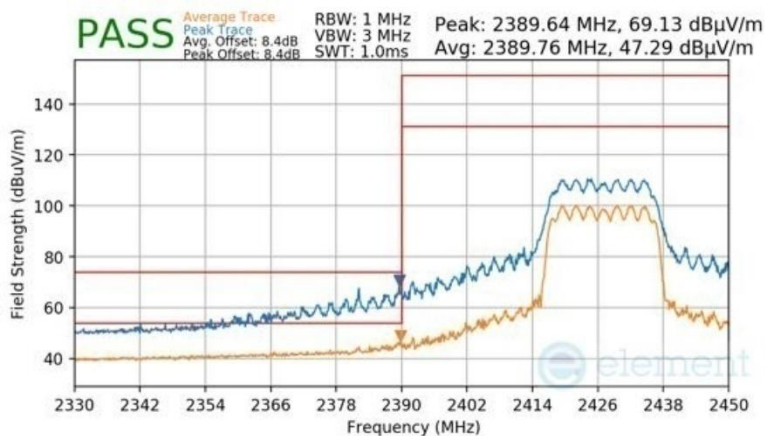


Plot 7-240 Radiated Restricted Lower Band Edge Measurement CDD Common (Peak & Average – RU242)

FCC ID: BCGA3218 IC: 579C-A3218	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 10/14/2024 - 1/15/2025	EUT Type: Smart Speaker with Display	Approved by: Technical Manager
Test Report S/N: 1C2410280081-05-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 172 of 199


V 12.0 03/03/2026

Mode: 802.11ax OFDMA
 Transfer Rate: MCS9
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2432MHz
 Channel: 5

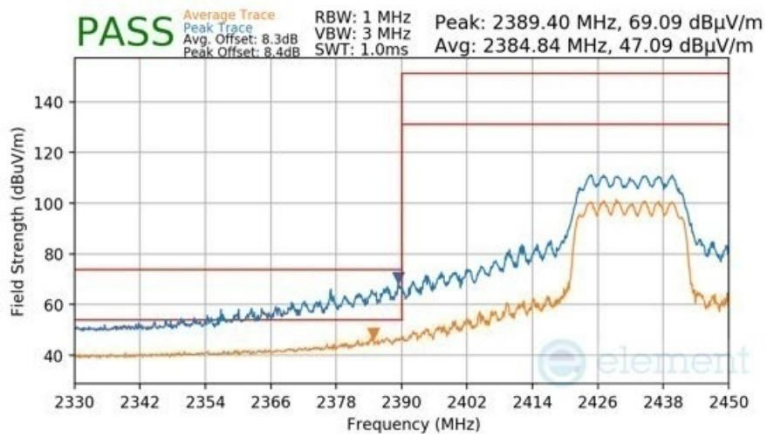

Plot 7-241 Radiated Restricted Lower Band Edge Measurement CDD Common (Peak & Average – RU242)


Mode: 802.11ax OFDMA
 Transfer Rate: MCS9
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2437MHz
 Channel: 6

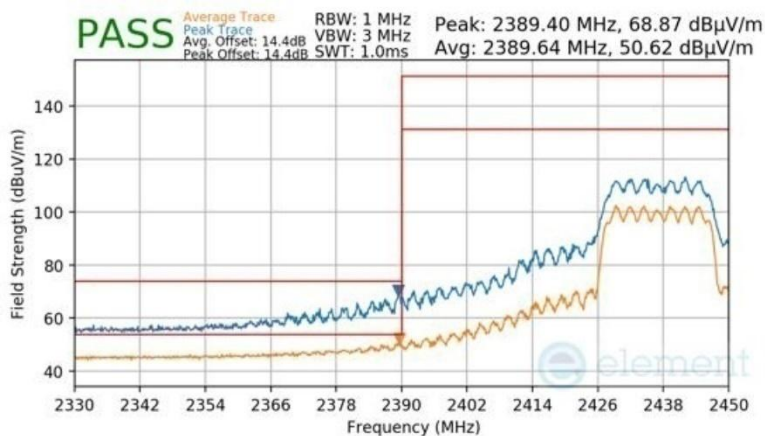

Plot 7-242 Radiated Restricted Lower Band Edge Measurement CDD Common (Peak & Average – RU242)


FCC ID: BCGA3218 IC: 579C-A3218	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 10/14/2024 - 1/15/2025	EUT Type: Smart Speaker with Display	Approved by: Technical Manager
Test Report S/N: 1C2410280081-05-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 173 of 199

Mode: 802.11ax OFDMA
 Transfer Rate: MCS9
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2437MHz
 Channel: 6

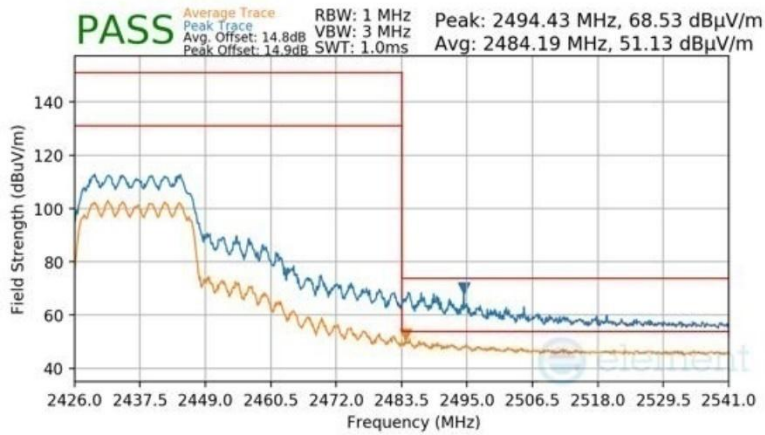

Plot 7-243 Radiated Restricted Upper Band Edge Measurement CDD Common (Peak & Average – RU242)


Mode: 802.11ax OFDMA
 Transfer Rate: MCS9
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2442MHz
 Channel: 7

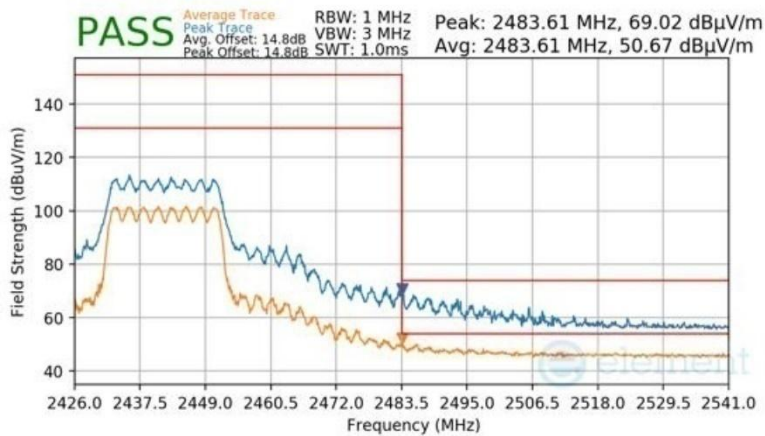

Plot 7-244 Radiated Restricted Upper Band Edge Measurement CDD Common (Peak & Average – RU242)


FCC ID: BCGA3218 IC: 579C-A3218	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 10/14/2024 - 1/15/2025	EUT Type: Smart Speaker with Display	Approved by: Technical Manager
Test Report S/N: 1C2410280081-05-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 174 of 199

Mode: 802.11ax OFDMA
 Transfer Rate: MCS9
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2447MHz
 Channel: 8

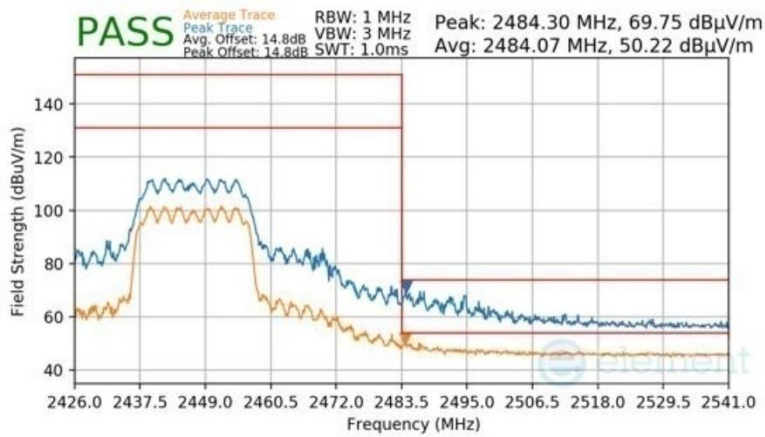

Plot 7-245 Radiated Restricted Upper Band Edge Measurement CDD Common (Peak & Average – RU242)


Mode: 802.11ax OFDMA
 Transfer Rate: MCS9
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2452MHz
 Channel: 9

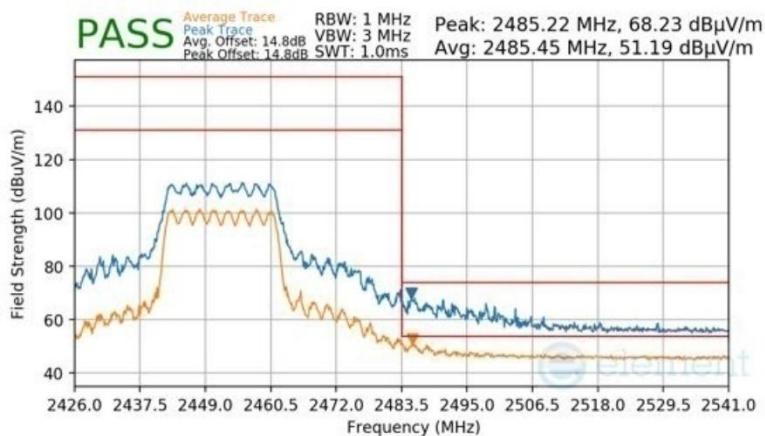

Plot 7-246 Radiated Restricted Upper Band Edge Measurement CDD Common (Peak & Average – RU242)


FCC ID: BCGA3218 IC: 579C-A3218	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 10/14/2024 - 1/15/2025	EUT Type: Smart Speaker with Display	Approved by: Technical Manager
Test Report S/N: 1C2410280081-05-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 175 of 199

Mode: 802.11ax OFDMA
 Transfer Rate: MCS9
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2457MHz
 Channel: 10

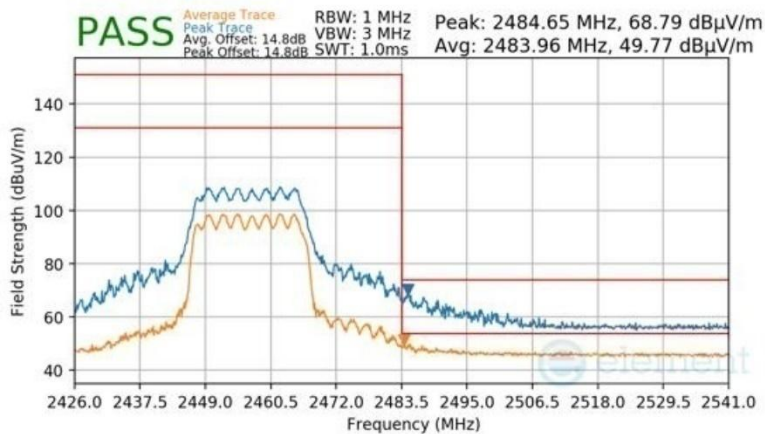

Plot 7-247 Radiated Restricted Upper Band Edge Measurement CDD Common (Peak & Average – RU242)


Mode: 802.11ax OFDMA
 Transfer Rate: MCS9
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2462MHz
 Channel: 11

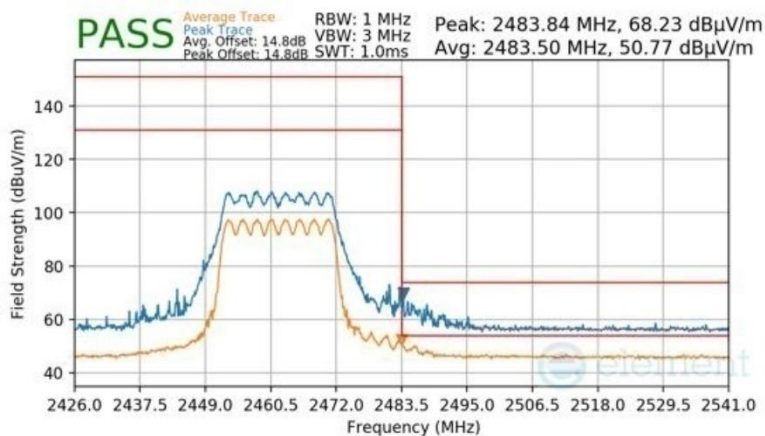

Plot 7-248 Radiated Restricted Upper Band Edge Measurement CDD Common (Peak & Average – RU242)

FCC ID: BCGA3218 IC: 579C-A3218	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 10/14/2024 - 1/15/2025	EUT Type: Smart Speaker with Display	Approved by: Technical Manager
Test Report S/N: 1C2410280081-05-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 176 of 199

Mode: 802.11ax OFDMA
 Transfer Rate: MCS9
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2467MHz
 Channel: 12

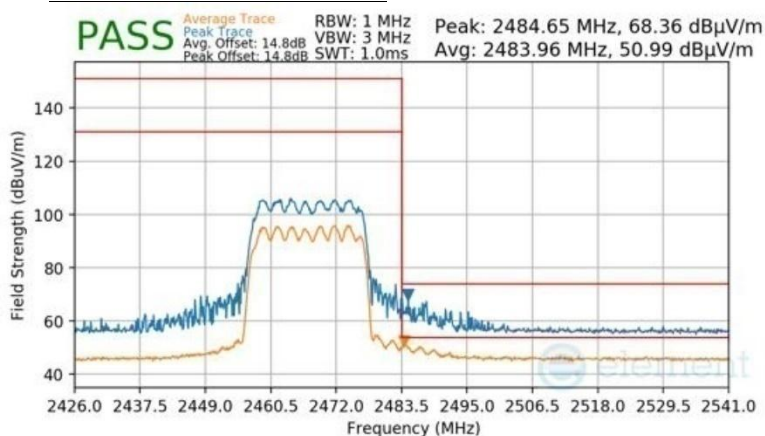

Plot 7-249 Radiated Restricted Upper Band Edge Measurement CDD Common (Peak & Average – RU242)

FCC ID: BCGA3218 IC: 579C-A3218	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 10/14/2024 - 1/15/2025	EUT Type: Smart Speaker with Display	Approved by: Technical Manager
Test Report S/N: 1C2410280081-05-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 177 of 199


V 12.0 03/03/2026

7.8.7 CDD Dedicated Radiated Restricted Band Edge Measurements

\$15.205 \$15.209; RSS-Gen [7.4.3]


RU26

Mode:	802.11ax OFDMA
Transfer Rate:	MCS9
RU Index:	0
Distance of Measurements:	3 Meters
Operating Frequency:	2412MHz
Channel:	1

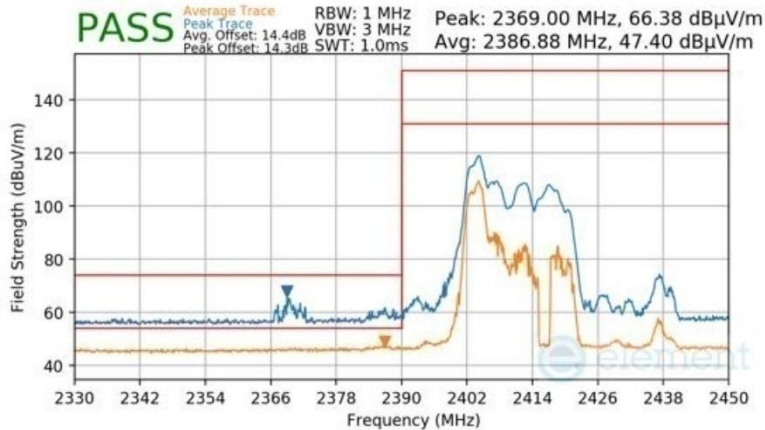

Plot 7-250 Radiated Restricted Lower Band Edge Measurement CDD Dedicated (Peak & Average – RU26)

Mode:	802.11ax OFDMA
Transfer Rate:	MCS9
RU Index:	8
Distance of Measurements:	3 Meters
Operating Frequency:	2412MHz
Channel:	1

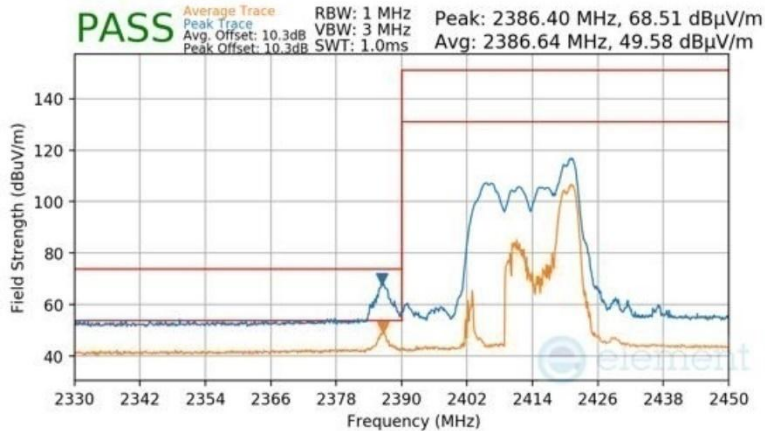


Plot 7-251 Radiated Restricted Lower Band Edge Measurement CDD Dedicated (Peak & Average – RU26)

FCC ID: BCGA3218 IC: 579C-A3218	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 10/14/2024 - 1/15/2025	EUT Type: Smart Speaker with Display	Approved by: Technical Manager
Test Report S/N: 1C2410280081-05-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 178 of 199

V 12.0 03/03/2026


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Mode: 802.11ax OFDMA
 Transfer Rate: MCS9
 RU Index: 0
 Distance of Measurements: 3 Meters
 Operating Frequency: 2462MHz
 Channel: 11

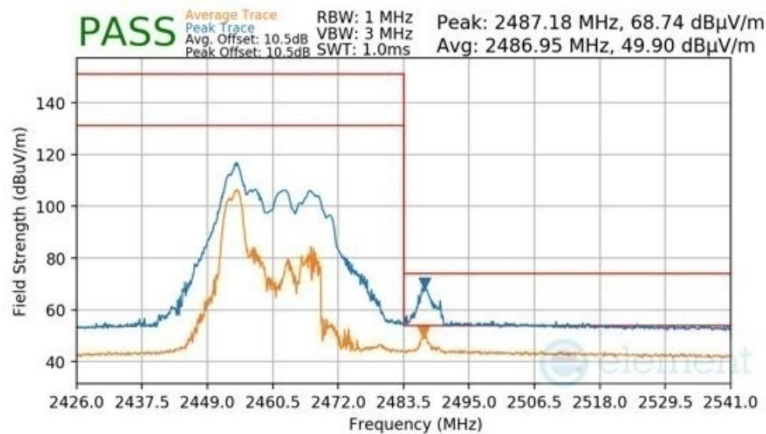

Plot 7-252 Radiated Restricted Upper Band Edge Measurement CDD Dedicated (Peak & Average – RU26)


Mode: 802.11ax OFDMA
 Transfer Rate: MCS9
 RU Index: 8
 Distance of Measurements: 3 Meters
 Operating Frequency: 2462MHz
 Channel: 11

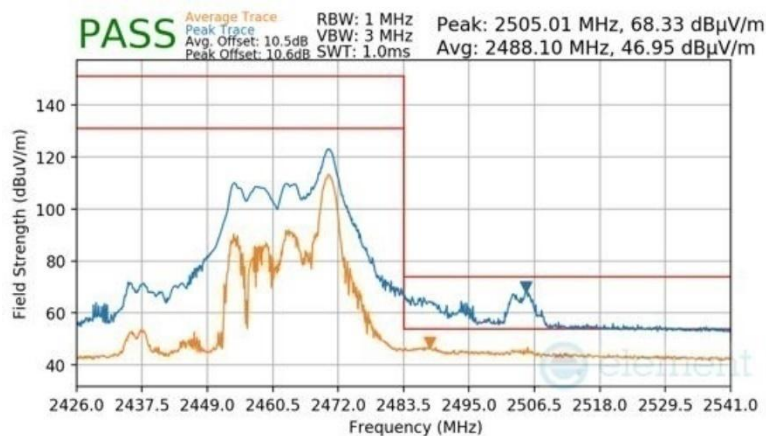

Plot 7-253 Radiated Restricted Upper Band Edge Measurement CDD Dedicated (Peak & Average – RU26)


FCC ID: BCGA3218 IC: 579C-A3218	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 10/14/2024 - 1/15/2025	EUT Type: Smart Speaker with Display	Approved by: Technical Manager
Test Report S/N: 1C2410280081-05-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 179 of 199

Mode: 802.11ax OFDMA
 Transfer Rate: MCS9
 RU Index: 0
 Distance of Measurements: 3 Meters
 Operating Frequency: 2467MHz
 Channel: 12

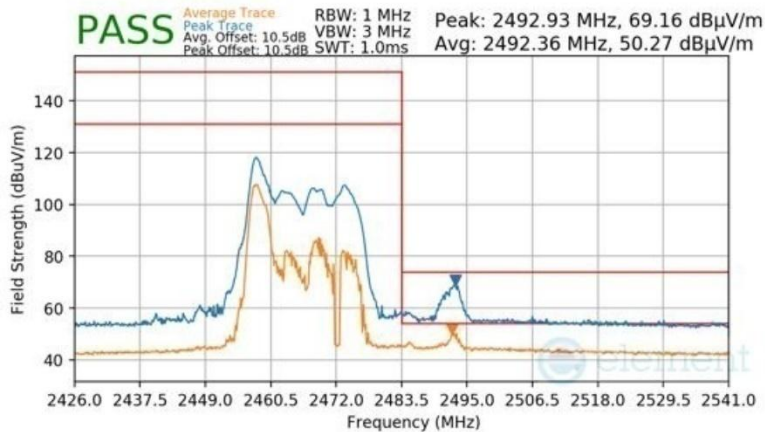

Plot 7-254 Radiated Restricted Upper Band Edge Measurement CDD Dedicated (Peak & Average – RU26)

Mode: 802.11ax OFDMA
 Transfer Rate: MCS9
 RU Index: 8
 Distance of Measurements: 3 Meters
 Operating Frequency: 2467MHz
 Channel: 12

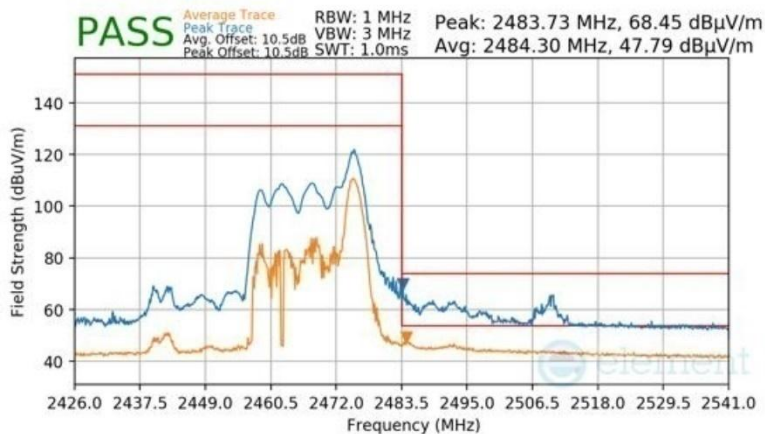


Plot 7-255 Radiated Restricted Upper Band Edge Measurement CDD Dedicated (Peak & Average – RU26)

FCC ID: BCGA3218 IC: 579C-A3218	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 10/14/2024 - 1/15/2025	EUT Type: Smart Speaker with Display	Approved by: Technical Manager
Test Report S/N: 1C2410280081-05-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 180 of 199


RU242

Mode: 802.11ax OFDMA
 Transfer Rate: MCS9
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2412MHz
 Channel: 1

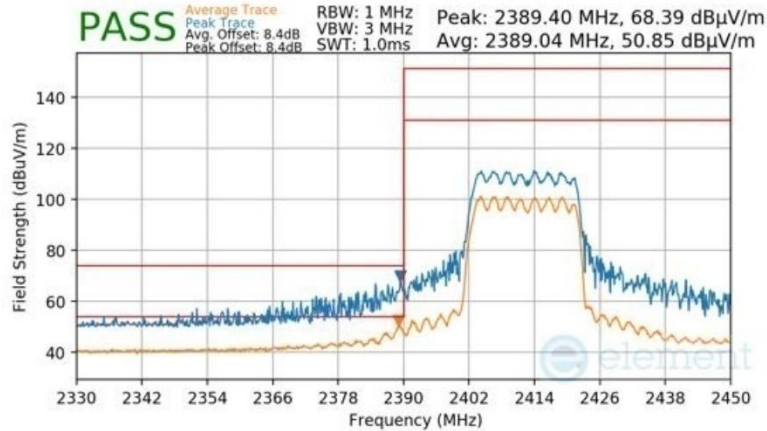

Plot 7-256 Radiated Restricted Lower Band Edge Measurement CDD Dedicated (Peak & Average – RU242)


Mode: 802.11ax OFDMA
 Transfer Rate: MCS9
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2417MHz
 Channel: 2

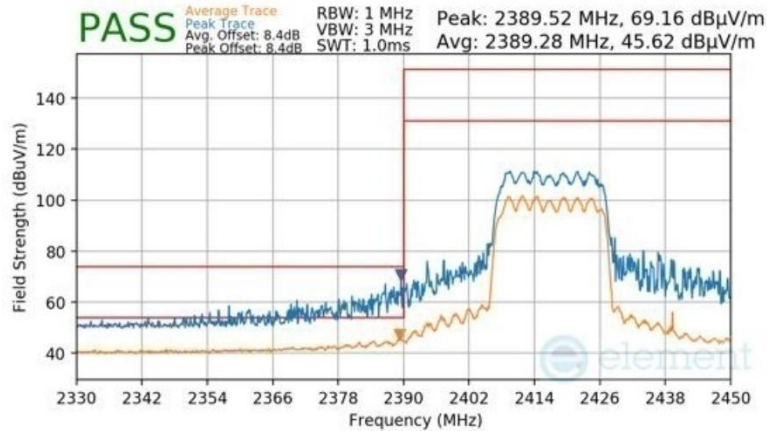

Plot 7-257 Radiated Restricted Lower Band Edge Measurement CDD Dedicated (Peak & Average – RU242)


FCC ID: BCGA3218 IC: 579C-A3218	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 10/14/2024 - 1/15/2025	EUT Type: Smart Speaker with Display	Approved by: Technical Manager
Test Report S/N: 1C2410280081-05-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 181 of 199

Mode: 802.11ax OFDMA
 Transfer Rate: MCS9
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2422MHz
 Channel: 3

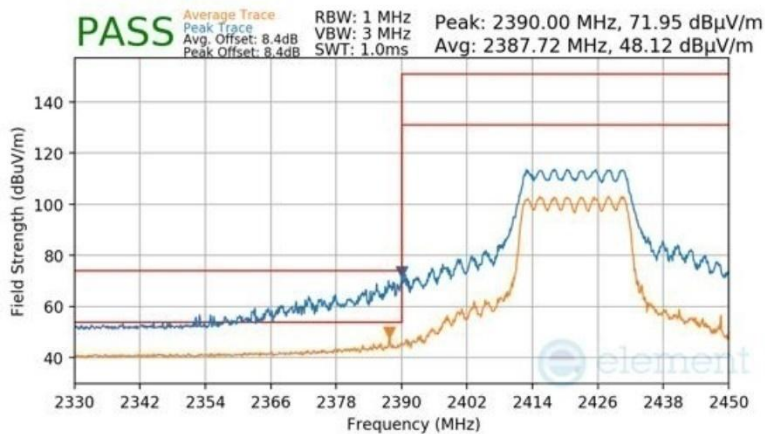

Plot 7-258 Radiated Restricted Lower Band Edge Measurement CDD Dedicated (Peak & Average – RU242)


Mode: 802.11ax OFDMA
 Transfer Rate: MCS9
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2427MHz
 Channel: 4

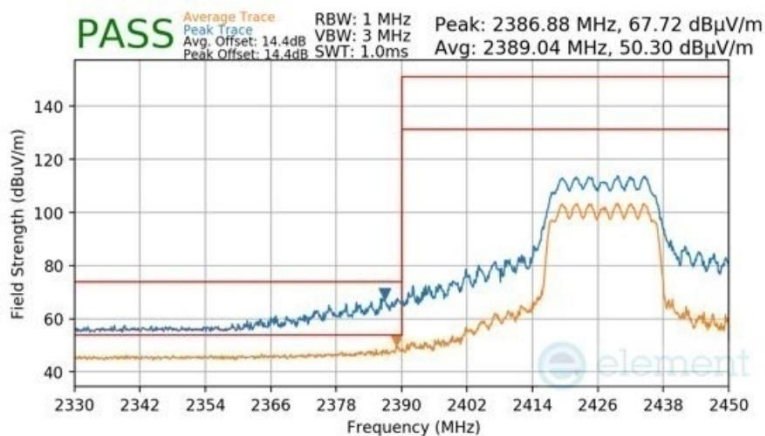

Plot 7-259 Radiated Restricted Lower Band Edge Measurement CDD Dedicated (Peak & Average – RU242)


FCC ID: BCGA3218 IC: 579C-A3218	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 10/14/2024 - 1/15/2025	EUT Type: Smart Speaker with Display	Approved by: Technical Manager
Test Report S/N: 1C2410280081-05-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 182 of 199

Mode: 802.11ax OFDMA
 Transfer Rate: MCS9
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2432MHz
 Channel: 5

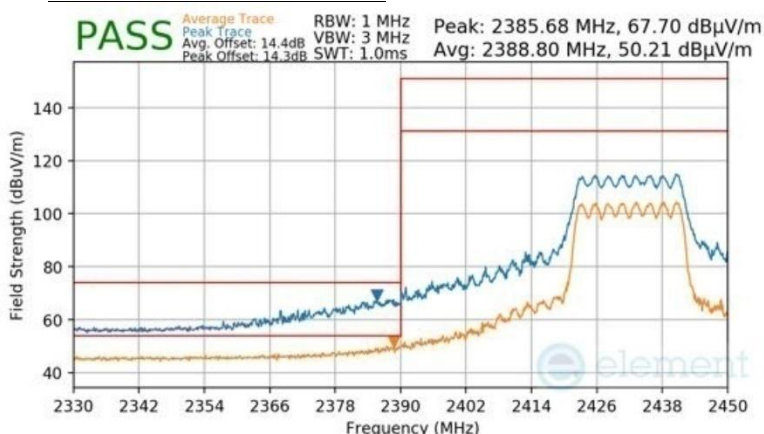

Plot 7-260 Radiated Restricted Lower Band Edge Measurement CDD Dedicated (Peak & Average – RU242)

Mode: 802.11ax OFDMA
 Transfer Rate: MCS9
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2437MHz
 Channel: 6

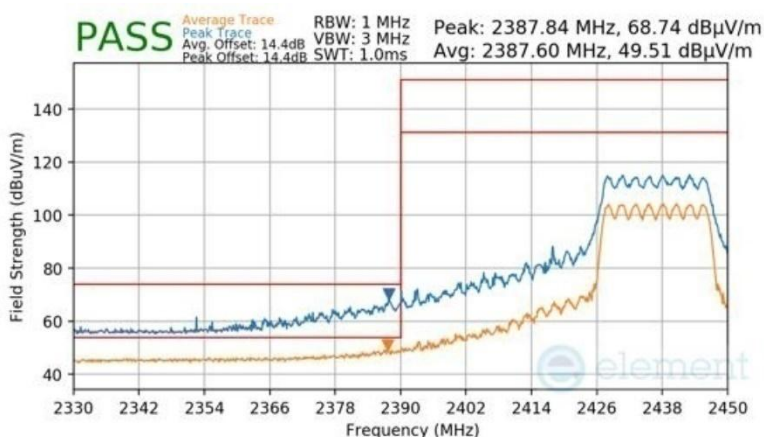


Plot 7-261 Radiated Restricted Lower Band Edge Measurement CDD Dedicated (Peak & Average – RU242)

FCC ID: BCGA3218 IC: 579C-A3218	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 10/14/2024 - 1/15/2025	EUT Type: Smart Speaker with Display	Approved by: Technical Manager
Test Report S/N: 1C2410280081-05-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 183 of 199


V 12.0 03/03/2026

Mode: 802.11ax OFDMA
 Transfer Rate: MCS9
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2437MHz
 Channel: 6

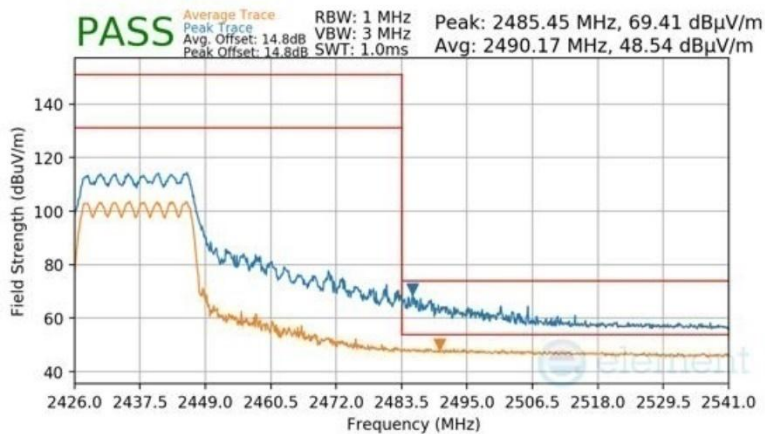

Plot 7-262 Radiated Restricted Upper Band Edge Measurement CDD Dedicated (Peak & Average – RU242)


Mode: 802.11ax OFDMA
 Transfer Rate: MCS9
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2442MHz
 Channel: 7

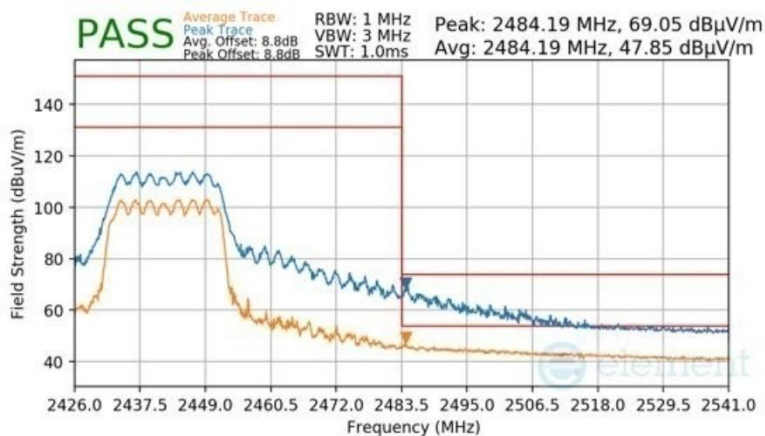

Plot 7-263 Radiated Restricted Upper Band Edge Measurement CDD Dedicated (Peak & Average – RU242)


FCC ID: BCGA3218 IC: 579C-A3218	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 10/14/2024 - 1/15/2025	EUT Type: Smart Speaker with Display	Approved by: Technical Manager
Test Report S/N: 1C2410280081-05-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 184 of 199

Mode: 802.11ax OFDMA
 Transfer Rate: MCS9
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2447MHz
 Channel: 8

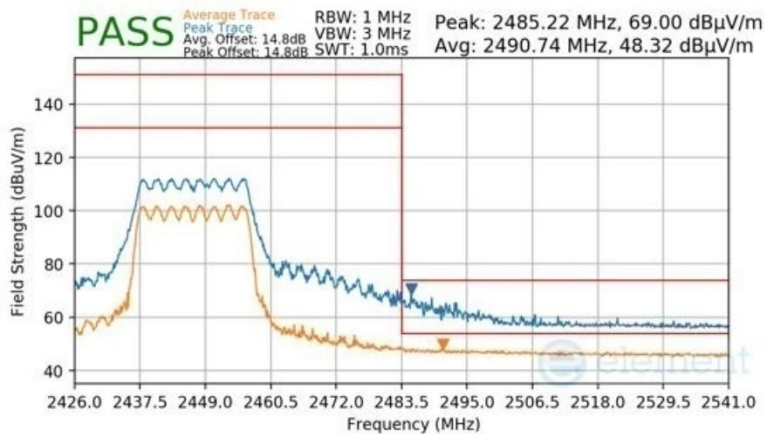

Plot 7-264 Radiated Restricted Upper Band Edge Measurement CDD Dedicated (Peak & Average – RU242)


Mode: 802.11ax OFDMA
 Transfer Rate: MCS9
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2452MHz
 Channel: 9

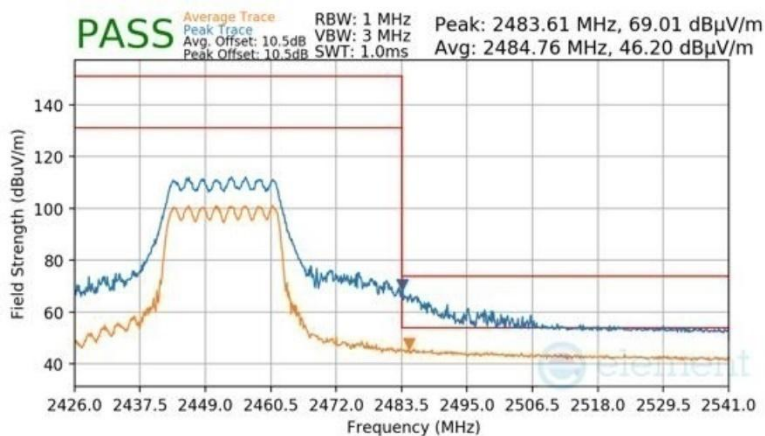

Plot 7-265 Radiated Restricted Upper Band Edge Measurement CDD Dedicated (Peak & Average – RU242)

FCC ID: BCGA3218 IC: 579C-A3218	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 10/14/2024 - 1/15/2025	EUT Type: Smart Speaker with Display	Approved by: Technical Manager
Test Report S/N: 1C2410280081-05-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 185 of 199

Mode: 802.11ax OFDMA
 Transfer Rate: MCS9
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2467MHz
 Channel: 12

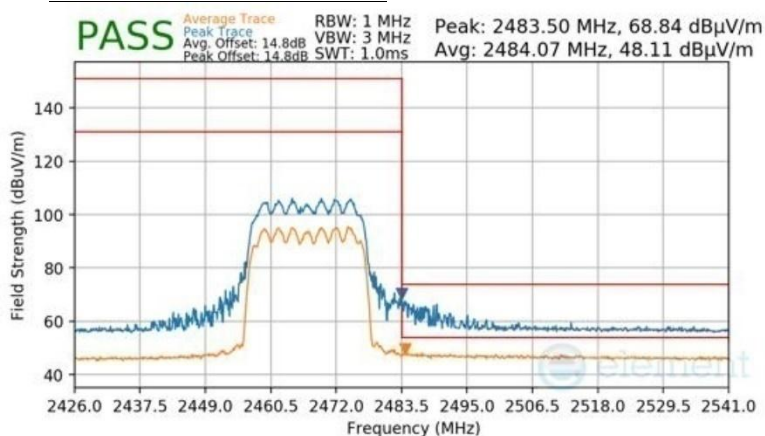

Plot 7-268 Radiated Restricted Upper Band Edge Measurement CDD Dedicated (Peak & Average – RU242)

FCC ID: BCGA3218 IC: 579C-A3218	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 10/14/2024 - 1/15/2025	EUT Type: Smart Speaker with Display	Approved by: Technical Manager
Test Report S/N: 1C2410280081-05-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 187 of 199

V 12.0 03/03/2026

7.9 Radiated Spurious Emissions – Below 1GHz

§15.209; RSS-Gen [7.4.3]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 6 of RSS-Gen (7.5) must not exceed the limits shown in Table 7-61 per Section 15.209 and RSS-Gen (7.4.3).

Frequency	Field Strength [μV/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-61. Radiated Limits

Test Procedures Used

ANSI C63.10:2020 + Cor. 1:2023 + C63.10A:2024 + Errata to C63.10A:2024

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. VBW = 300kHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: BCGA3218 IC: 579C-A3218	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 10/14/2024 - 1/15/2025	EUT Type: Smart Speaker with Display	Approved by: Technical Manager
Test Report S/N: 1C2410280081-05-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 188 of 199

Test Setup

The EUT and Measurement equipment were set up as shown in the diagrams below.

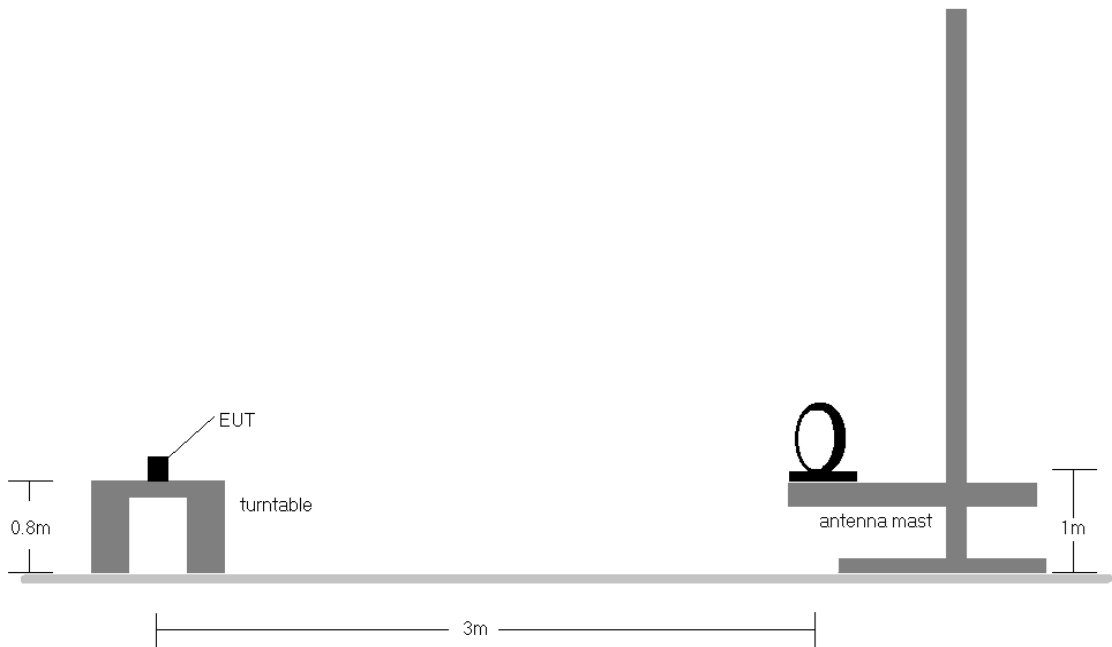


Figure 7-8. Radiated Test Setup < 30MHz

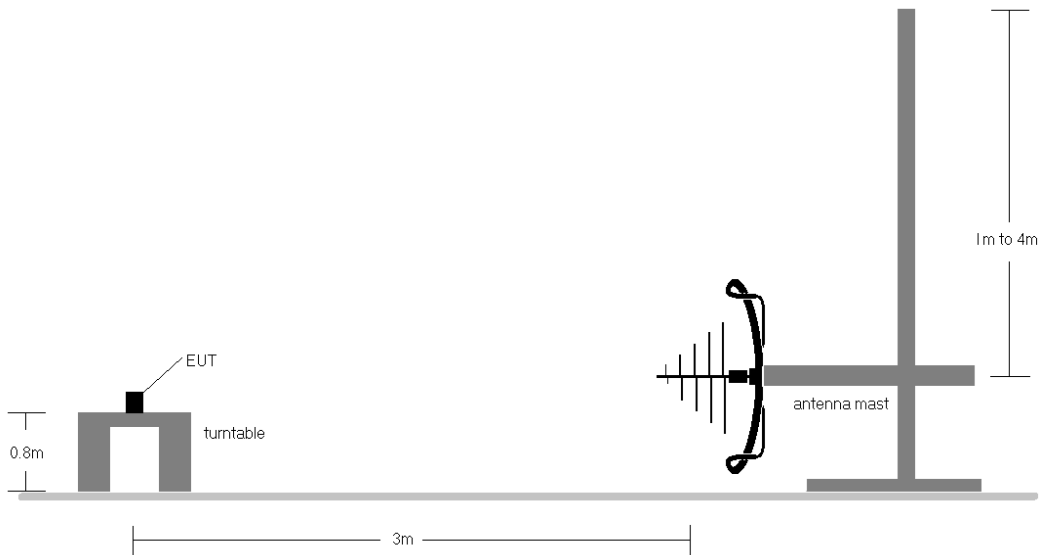


Figure 7-9. Radiated Test Setup < 1GHz

FCC ID: BCGA3218 IC: 579C-A3218	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 10/14/2024 - 1/15/2025	EUT Type: Smart Speaker with Display	Approved by: Technical Manager
Test Report S/N: 1C2410280081-05-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 189 of 199

Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen (7.5) are below the limit shown in Table 7-61.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three screen angles. For below 30MHz the loop antenna was positioned in 3 orthogonal planes (X front, Y side, Z top) to determine the orientation resulting in the worst case emissions.
3. This unit was tested while powered by an AC/DC Adapter via USB-C Cable.
4. The spectrum is investigated using a peak detector and final Measurements are recorded using CISPR quasi peak detector for emissions within 6dB of the limit.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the Measurement antenna was found to be less than 2:1.
9. All antenna configurations and data rates were investigated and only the worst case are reported.
10. For radiated Measurements, emissions were investigated for the fully-loaded RU configuration and for all the partially-loaded RU configurations. Among all of the available partially-loaded RU configurations, only the configuration with the worst case emissions is reported.
11. The following configuration was investigated and EUT powered by AC/DC was the worst case.
 - a. EUT powered by an AC/DC Adapter via USB-C Cable.

Sample Calculations


Determining Spurious Emissions Levels

- Field Strength Level $_{[dB_{\mu V/m}]}$ = Analyzer Level $_{[dBm]} + 107 + AFCL_{[dB/m]}$
- $AFCL_{[dB/m]} = \text{Antenna Factor}_{[dB/m]} + \text{Cable Loss}_{[dB]} - \text{Preamplifier Gain}_{[dB]}$
- Margin $_{[dB]} = \text{Field Strength Level}_{[dB_{\mu V/m}]} - \text{Limit}_{[dB_{\mu V/m}]}$

FCC ID: BCGA3218 IC: 579C-A3218	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 10/14/2024 - 1/15/2025	EUT Type: Smart Speaker with Display	Approved by: Technical Manager
Test Report S/N: 1C2410280081-05-R2.BCG	 This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.			Page 190 of 199

CDD Dedicated Radiated Spurious Emissions Measurements (Below 1GHz)

§15.209; RSS-Gen [7.4.3]

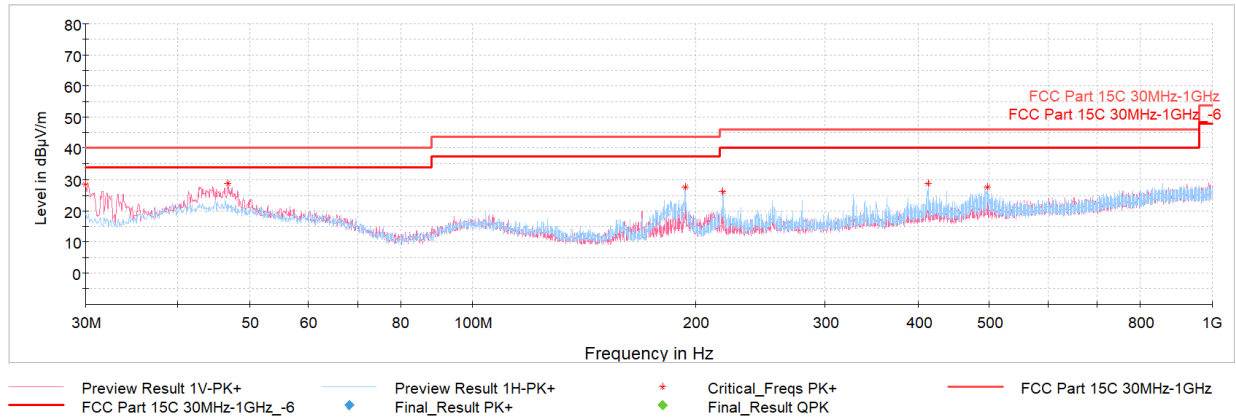


Plot 7-269. Radiated Spurious Emissions below 1GHz CDD Dedicated Ch.6 (RU26), with AC/DC Adapter via USB-C cable

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
30.00	Peak	V	100	56	-60.29	-18.29	28.42	40.00	-11.58
46.73	Peak	V	100	259	-63.85	-14.39	28.76	40.00	-11.24
194.17	Peak	H	100	264	-63.42	-16.02	27.56	43.52	-15.96
218.03	Peak	H	100	176	-65.06	-15.85	26.09	46.02	-19.93
412.81	Peak	H	100	45	-68.24	-10.08	28.68	46.02	-17.34
497.59	Peak	H	200	276	-70.72	-8.65	27.63	46.02	-18.39

Table 7-62. Radiated Spurious Emissions below 1GHz CDD Dedicated Ch.6 (RU26), with AC/DC Adapter via USB-C cable

FCC ID: BCGA3218 IC: 579C-A3218	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 10/14/2024 - 1/15/2025	EUT Type: Smart Speaker with Display	Approved by: Technical Manager
Test Report S/N: 1C2410280081-05-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 191 of 199

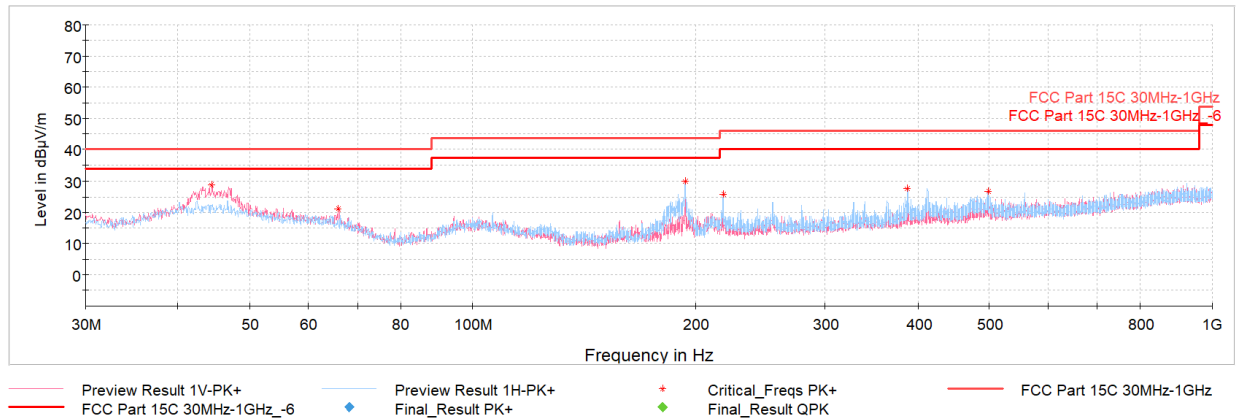

Plot 7-270. Radiated Spurious Emissions below 1GHz CDD Dedicated Ch.6 (RU242), with AC/DC Adapter via USB-C cable

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
44.45	Peak	V	100	22	-63.63	-14.65	28.72	40.00	-11.28
65.99	Peak	V	100	173	-68.44	-17.62	20.94	40.00	-19.06
193.83	Peak	H	200	255	-61.14	-16.07	29.79	43.52	-13.73
218.57	Peak	H	100	191	-65.26	-15.84	25.90	46.02	-20.12
387.49	Peak	H	100	339	-68.68	-10.75	27.57	46.02	-18.45
497.93	Peak	H	200	335	-71.74	-8.66	26.60	46.02	-19.42

Table 7-63. Radiated Spurious Emissions below 1GHz CDD Dedicated Ch.6 (RU242), with AC/DC Adapter via USB-C cable

FCC ID: BCGA3218 IC: 579C-A3218	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 10/14/2024 - 1/15/2025	EUT Type: Smart Speaker with Display	Approved by: Technical Manager
Test Report S/N: 1C2410280081-05-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 192 of 199

7.10 AC Line-Conducted Emissions Measurement

§15.207; RSS-Gen [7.4.2]

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for AC Line conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (7.4.2).

Frequency of emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-64. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10:2020 + Cor. 1:2023 + C63.10A:2024 + Errata to C63.10A:2024, Subclause 6.2

Test Settings

Quasi-Peak Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: BCGA3218 IC: 579C-A3218	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 10/14/2024 - 1/15/2025	EUT Type: Smart Speaker with Display	Approved by: Technical Manager
Test Report S/N: 1C2410280081-05-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 193 of 199

Test Setup

The EUT and Measurement equipment were set up as shown in the diagram below.


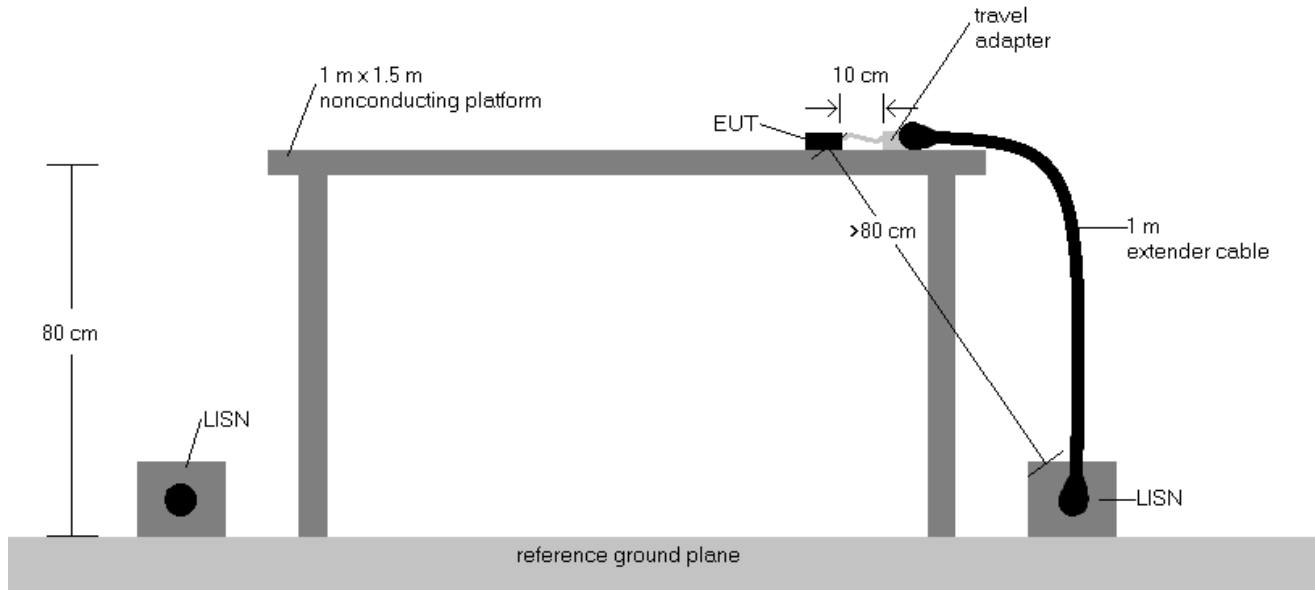


Figure 7-10. Test Instrument & Measurement Setup

Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported. The emissions found were not affected by the choice of channel used during testing.
2. The limit for an intentional radiator from 150kHz to 30MHz are specified in Part 15.207 and RSS-Gen(7.4.2).
3. $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
4. $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Correction Factor (dB)}$
5. $\text{Margin (dB)} = \text{QP/AV Level (dB}\mu\text{V)} - \text{QP/AV Limit (dB}\mu\text{V)}$
6. Traces shown in plot are made using quasi peak and average detectors.
7. Deviations to the Specifications: None.
8. All RU's were investigated and only worst case partially-loaded and fully-loaded RU's are reported.

FCC ID: BCGA3218 IC: 579C-A3218	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 10/14/2024 - 1/15/2025	EUT Type: Smart Speaker with Display	Approved by: Technical Manager
Test Report S/N: 1C2410280081-05-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 194 of 199

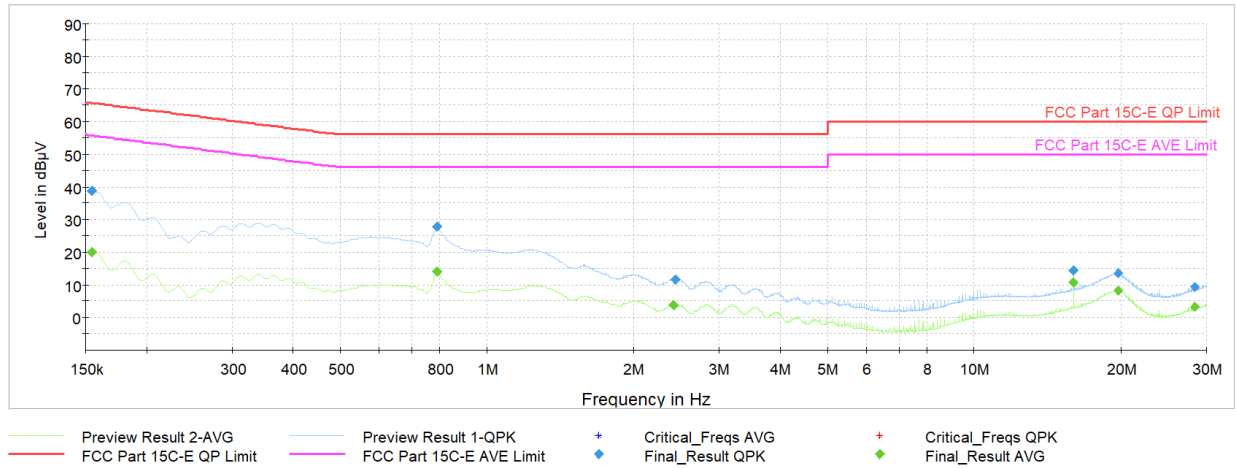

Plot 7-271. AC Line Conducted Emissions with 802.11ax (RU26) Ch.6 (L1, with AC/DC Adapter via USB-C cable)


Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.155	FINAL	—	20.08	55.75	-35.68	L1	GND
0.155	FINAL	38.6	—	65.75	-27.14	L1	GND
0.789	FINAL	—	14.06	46.00	-31.94	L1	GND
0.789	FINAL	27.7	—	56.00	-28.27	L1	GND
2.411	FINAL	—	3.79	46.00	-42.21	L1	GND
2.436	FINAL	11.5	—	56.00	-44.53	L1	GND
15.979	FINAL	14.4	—	60.00	-45.63	L1	GND
15.979	FINAL	—	10.75	50.00	-39.25	L1	GND
19.763	FINAL	—	8.19	50.00	-41.81	L1	GND
19.766	FINAL	13.4	—	60.00	-46.57	L1	GND
28.367	FINAL	—	3.25	50.00	-46.75	L1	GND
28.367	FINAL	9.3	—	60.00	-50.66	L1	GND

Table 7-65. AC Line Conducted Data with 802.11ax (RU26) Ch.6 (L1, with AC/DC Adapter via USB-C cable)

FCC ID: BCGA3218 IC: 579C-A3218	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 10/14/2024 - 1/15/2025	EUT Type: Smart Speaker with Display	Approved by: Technical Manager
Test Report S/N: 1C2410280081-05-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 195 of 199

V 12.0 03/03/2026

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

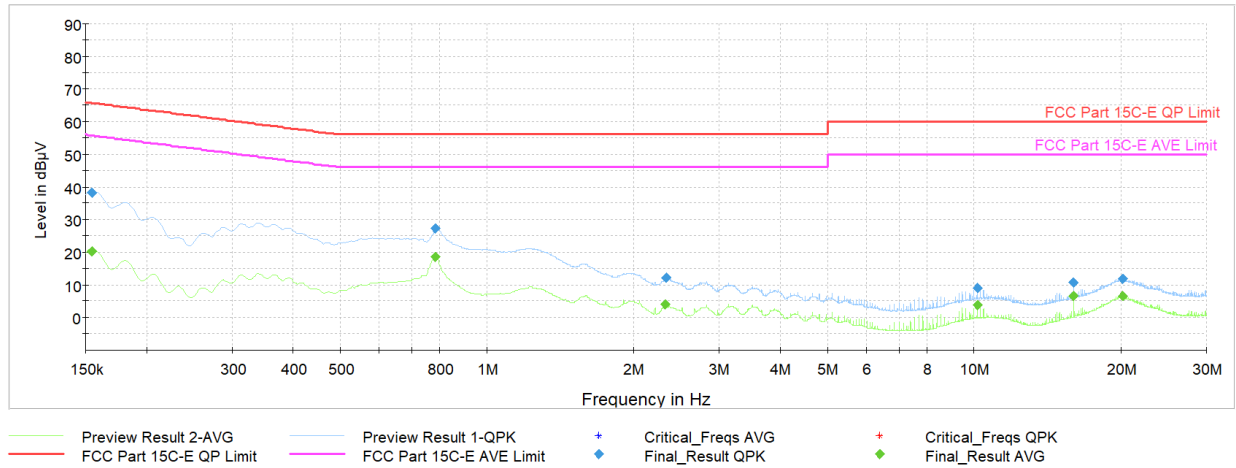

Plot 7-272. AC Line Conducted Emissions with 802.11ax (RU26) Ch.6 (N, with AC/DC Adapter via USB-C cable)


Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.155	FINAL	—	20.37	55.75	-35.38	N	GND
0.155	FINAL	38.2	—	65.75	-27.60	N	GND
0.782	FINAL	—	18.59	46.00	-27.41	N	GND
0.785	FINAL	27.3	—	56.00	-28.68	N	GND
2.326	FINAL	—	4.12	46.00	-41.88	N	GND
2.333	FINAL	12.1	—	56.00	-43.88	N	GND
10.142	FINAL	9.0	—	60.00	-51.04	N	GND
10.142	FINAL	—	3.60	50.00	-46.40	N	GND
15.988	FINAL	10.9	—	60.00	-49.15	N	GND
15.988	FINAL	—	6.61	50.00	-43.39	N	GND
20.130	FINAL	11.8	—	60.00	-48.17	N	GND
20.132	FINAL	—	6.39	50.00	-43.61	N	GND

Table 7-66. AC Line Conducted Data with 802.11ax (RU26) Ch.6 (N, with AC/DC Adapter via USB-C cable)

FCC ID: BCGA3218 IC: 579C-A3218	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 10/14/2024 - 1/15/2025	EUT Type: Smart Speaker with Display	Approved by: Technical Manager
Test Report S/N: 1C2410280081-05-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 196 of 199

V 12.0 03/03/2026


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

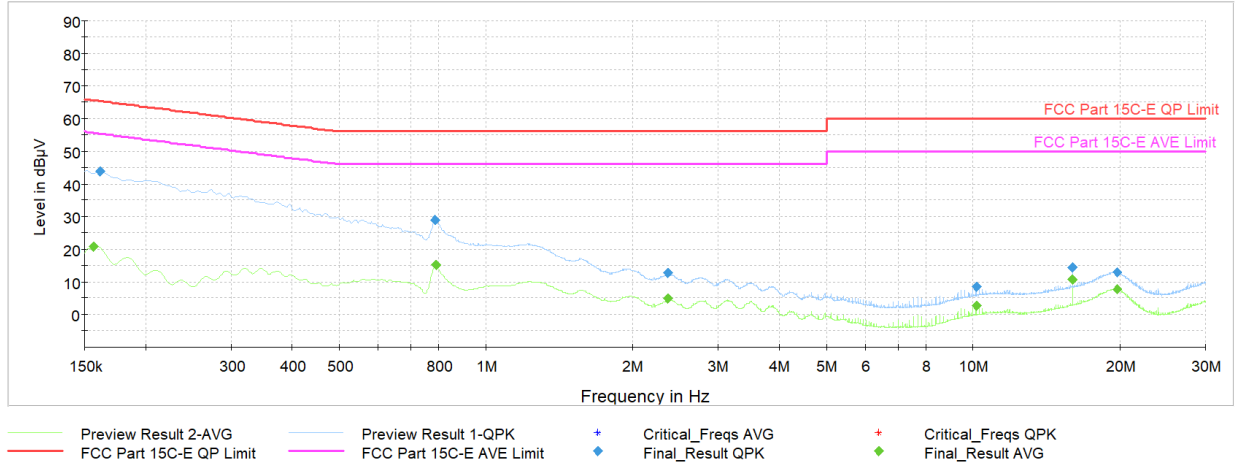

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.157	FINAL	—	20.86	55.63	-34.78	L1	GND
0.161	FINAL	43.7	—	65.40	-21.75	L1	GND
0.787	FINAL	29.0	—	56.00	-27.05	L1	GND
0.789	FINAL	—	15.22	46.00	-30.78	L1	GND
2.362	FINAL	12.6	—	56.00	-43.40	L1	GND
2.364	FINAL	—	4.82	46.00	-41.18	L1	GND
10.138	FINAL	8.5	—	60.00	-51.55	L1	GND
10.138	FINAL	—	2.61	50.00	-47.39	L1	GND
15.974	FINAL	14.4	—	60.00	-45.63	L1	GND
15.974	FINAL	—	10.65	50.00	-39.35	L1	GND
19.739	FINAL	—	7.68	50.00	-42.32	L1	GND
19.743	FINAL	13.0	—	60.00	-46.96	L1	GND

Table 7-67. AC Line Conducted Data with 802.11ax (RU242) Ch.6 (L1, with AC/DC Adapter via USB-C cable)

FCC ID: BCGA3218 IC: 579C-A3218	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 10/14/2024 - 1/15/2025	EUT Type: Smart Speaker with Display	Approved by: Technical Manager
Test Report S/N: 1C2410280081-05-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 197 of 199

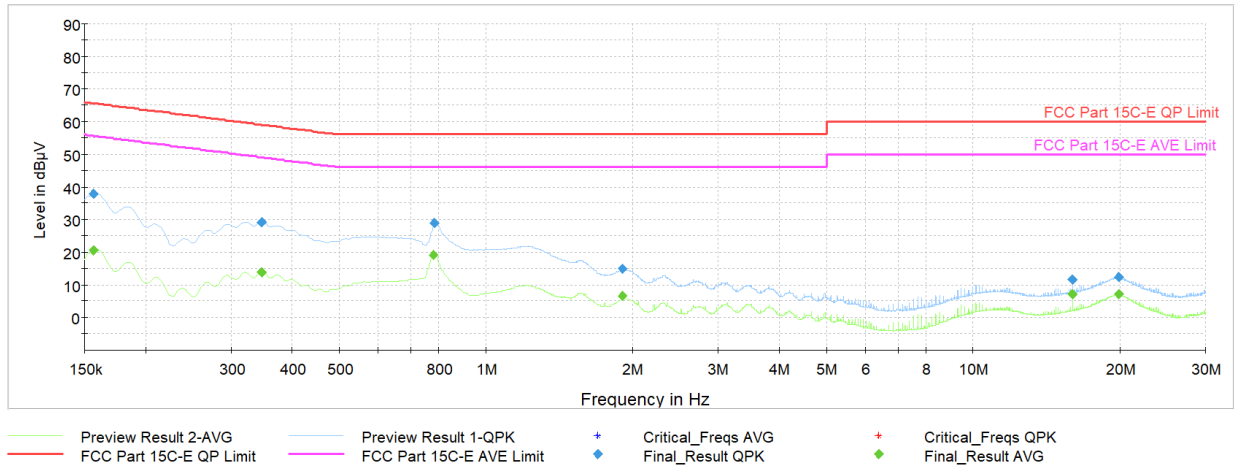

Plot 7-274. AC Line Conducted Emissions with 802.11ax (RU242) Ch.6 (N, with AC/DC Adapter via USB-C cable)

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.157	FINAL	—	20.64	55.63	-34.99	N	GND
0.157	FINAL	37.8	—	65.63	-27.87	N	GND
0.346	FINAL	—	13.88	49.06	-35.19	N	GND
0.346	FINAL	29.2	—	59.06	-29.91	N	GND
0.780	FINAL	—	19.27	46.00	-26.73	N	GND
0.785	FINAL	28.8	—	56.00	-27.19	N	GND
1.905	FINAL	—	6.52	46.00	-39.48	N	GND
1.907	FINAL	14.9	—	56.00	-41.10	N	GND
15.979	FINAL	11.6	—	60.00	-48.39	N	GND
15.979	FINAL	—	7.06	50.00	-42.94	N	GND
19.889	FINAL	12.4	—	60.00	-47.63	N	GND
19.892	FINAL	—	7.05	50.00	-42.95	N	GND

Table 7-68. AC Line Conducted Data with 802.11ax (RU242) Ch.6 (N, with AC/DC Adapter via USB-C cable)

FCC ID: BCGA3218 IC: 579C-A3218	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 10/14/2024 - 1/15/2025	EUT Type: Smart Speaker with Display	Approved by: Technical Manager
Test Report S/N: 1C2410280081-05-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 198 of 199

V 12.0 03/03/2026

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Apple Smart Speaker with Display FCC ID: BCGA3218, IC: 579C-A3218** is in compliance with Part 15 Subpart C (15.247) of the FCC Rules and RSS-247 of the Innovation, Science and Economic Development Canada Rules.

FCC ID: BCGA3218 IC: 579C-A3218	MEASUREMENT REPORT (CERTIFICATION)	Test Dates: 10/14/2024 - 1/15/2025	EUT Type: Smart Speaker with Display	Approved by: Technical Manager
Test Report S/N: 1C2410280081-05-R2.BCG		This report is Blockchain Verified. To verify the report authenticity, please visit https://www.blockchain-verified.com or by clicking on the Blockchain logo.		Page 199 of 199