

## MEASUREMENT REPORT

### FCC PART 15.247 / ISED RSS-247 WLAN 802.11a/ax (OFDMA)

**Applicant Name:**

Apple Inc.  
One Apple Park Way  
Cupertino, CA 95014  
United States

**Date of Testing:**

3/24/2025 - 11/26/2025

**Test Report Issue Date:**

9/17/2026

**Test Site/Location:**

Element Materials Technology, Morgan Hill, CA USA

**Test Report Serial No.:**

1C2503170028-05-R4.BCG

**FCC ID:**

**BCGA3300**

**IC:**

**579C-A3300**

**APPLICANT:**

**Apple Inc.**

**Application Type:**

Certification

**Model/HVIN:**

A3300

**EUT Type:**

Smart Speaker with Display

**Frequency Range:**

2412 – 2467MHz

**Modulation Type:**

OFDMA

**FCC Classification:**

Digital Transmission System (DTS)

**FCC Rule Part(s):**

Part 15 Subpart C (15.247)

**ISED Specification:**

RSS-247 Issue 4

**Test Procedure(s):**

ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to  
C63.10a:2024, KDB 558074 D01 v05r02, KDB 662911 D01 v02r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 and KDB 558074 D01 v05r02. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



RJ Ortanez  
Executive Vice President



|                                                   |                                                                                     |                                                                                                                                                                                                                  |                                                |                                          |
|---------------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------|------------------------------------------|
| <b>FCC ID:</b> BCGA3300<br><b>IC:</b> 579C-A3300  |  | <b>Test Dates:</b><br>3/24/2025 - 11/26/2025                                                                                                                                                                     | <b>EUT Type:</b><br>Smart Speaker with Display | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1C2503170028-05-R4.BCG |  | This report is Blockchain Verified. To verify the report authenticity, please visit <a href="https://www.blockchain-verified.com">https://www.blockchain-verified.com</a> or by clicking on the Blockchain logo. |                                                | Page 1 of 175                            |

## Revision Summary

| Revision | Date       | Comments                                           | Revised By |
|----------|------------|----------------------------------------------------|------------|
| -        | 6/19/2025  | Initial Release                                    | WKR016622  |
| R1       | 11/26/2025 | Addressed TCB Comments in sections 7.1-7.5 and 7.8 | WKR016622  |
| R2       | 9/14/2026  | Addressed TCB Comments formatting                  | WKR007077  |
| R3       | 9/17/2026  | Addressed TCB Comments in sections 7.2 to 7.10     | WKR016622  |
| R4       | 9/17/2026  | Addressed TCB Comments in section 7.8              | WKR016622  |


|                                                   |                                                                                     |                                                                                                                                                                                                                  |                                                |                                          |
|---------------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------|------------------------------------------|
| <b>FCC ID:</b> BCGA3300<br><b>IC:</b> 579C-A3300  |  | <b>Test Dates:</b><br>3/24/2025 - 11/26/2025                                                                                                                                                                     | <b>EUT Type:</b><br>Smart Speaker with Display | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1C2503170028-05-R4.BCG |  | This report is Blockchain Verified. To verify the report authenticity, please visit <a href="https://www.blockchain-verified.com">https://www.blockchain-verified.com</a> or by clicking on the Blockchain logo. |                                                | Page 2 of 175                            |

V 12.0 03/03/2026


## TABLE OF CONTENTS

|     |                                                 |     |
|-----|-------------------------------------------------|-----|
| 1.0 | INTRODUCTION.....                               | 5   |
| 1.1 | Scope .....                                     | 5   |
| 1.2 | Element Materials Technology Test Location..... | 5   |
| 1.3 | Test Facility / Accreditations.....             | 5   |
| 2.0 | PRODUCT INFORMATION .....                       | 6   |
| 2.1 | Equipment Description .....                     | 6   |
| 2.2 | Device Capabilities .....                       | 6   |
| 2.3 | Antenna Description .....                       | 8   |
| 2.4 | Test Support Equipment.....                     | 9   |
| 2.5 | Test Configuration .....                        | 9   |
| 2.6 | Software and Firmware .....                     | 9   |
| 2.7 | EMI Suppression Device(s)/Modifications .....   | 9   |
| 3.0 | DESCRIPTION OF TESTS .....                      | 10  |
| 3.1 | Evaluation Procedure .....                      | 10  |
| 3.2 | AC Line Conducted Emissions .....               | 10  |
| 3.3 | Radiated Emissions.....                         | 11  |
| 3.4 | Environmental Conditions.....                   | 11  |
| 4.0 | ANTENNA REQUIREMENTS .....                      | 12  |
| 5.0 | MEASUREMENT UNCERTAINTY.....                    | 13  |
| 6.0 | TEST EQUIPMENT CALIBRATION DATA.....            | 14  |
| 7.0 | TEST RESULTS.....                               | 15  |
| 7.1 | Summary .....                                   | 15  |
| 7.2 | Bandwidth Measurement.....                      | 16  |
| 7.3 | Output Power Measurement.....                   | 36  |
| 7.4 | Power Spectral Density .....                    | 44  |
| 7.5 | Conducted Authorized Band Edge .....            | 61  |
| 7.6 | Conducted Spurious Emissions.....               | 92  |
| 7.7 | Radiated Spurious Emissions – Above 1 GHz ..... | 100 |
| 7.8 | Radiated Spurious Emissions – Below 1GHz.....   | 164 |
| 7.9 | AC Line-Conducted Emissions Measurement .....   | 169 |
| 8.0 | CONCLUSION .....                                | 175 |

|                                                   |                                                                                     |                                                                                                                                                                                                                  |                                                |                                          |
|---------------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------|------------------------------------------|
| <b>FCC ID:</b> BCGA3300<br><b>IC:</b> 579C-A3300  |  | <b>Test Dates:</b><br>3/24/2025 - 11/26/2025                                                                                                                                                                     | <b>EUT Type:</b><br>Smart Speaker with Display | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1C2503170028-05-R4.BCG |  | This report is Blockchain Verified. To verify the report authenticity, please visit <a href="https://www.blockchain-verified.com">https://www.blockchain-verified.com</a> or by clicking on the Blockchain logo. |                                                | Page 3 of 175                            |



## MEASUREMENT REPORT



| 802.11     | Tx Frequency<br>[MHz] | Ant1               |                     |                    |                     | Ant2               |                     |                    |                     | CDD                |                     |                    |                     |
|------------|-----------------------|--------------------|---------------------|--------------------|---------------------|--------------------|---------------------|--------------------|---------------------|--------------------|---------------------|--------------------|---------------------|
|            |                       | Avg Conducted      |                     | Peak Conducted     |                     | Avg Conducted      |                     | Peak Conducted     |                     | Avg Conducted      |                     | Peak Conducted     |                     |
|            |                       | Max. Power<br>(mW) | Max. Power<br>(dBm) | Max. Power<br>(mW) | Max. Power<br>(dBm) | Max. Power<br>(mW) | Max. Power<br>(dBm) | Max. Power<br>(mW) | Max. Power<br>(dBm) | Max. Power<br>(mW) | Max. Power<br>(dBm) | Max. Power<br>(mW) | Max. Power<br>(dBm) |
| 11ax OFDMA | 2412 - 2467           | 38.726             | 15.88               | 334.965            | 25.25               | 39.355             | 15.95               | 324.340            | 25.11               | 74.989             | 18.75               | 626.614            | 27.97               |

### EUT Overview (802.11ax – RU)

|                                                   |                                                                                     |                                                                                                                                                                                                                  |                                                |                                          |
|---------------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------|------------------------------------------|
| <b>FCC ID:</b> BCGA3300<br><b>IC:</b> 579C-A3300  |  | <b>Test Dates:</b><br>3/24/2025 - 11/26/2025                                                                                                                                                                     | <b>EUT Type:</b><br>Smart Speaker with Display | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1C2503170028-05-R4.BCG |  | This report is Blockchain Verified. To verify the report authenticity, please visit <a href="https://www.blockchain-verified.com">https://www.blockchain-verified.com</a> or by clicking on the Blockchain logo. |                                                | Page 4 of 175                            |

V 12.0 03/03/2026

## 1.0 INTRODUCTION

### 1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

### 1.2 Element Materials Technology Test Location

These measurement tests were conducted at the Element Materials Technology facility located at 18855 Adams Court, Morgan Hill, CA 95037. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01r01.

### 1.3 Test Facility / Accreditations

Measurements were performed at Element Materials Technology located in Morgan Hill, CA 95037, U.S.A.

- Element Materials Technology is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Materials Technology facility is a registered (22831) test laboratory with the site description on file with ISED.
- Element Washington DC LLC is a Recognized U.S. Certification Assessment Body (CAB # US0110) for ISED Canada as designated by NIST under the U.S. and Canada Mutual Recognition Agreements (MRAs).

|                                                   |                                                                                     |                                                                                                                                                                                                                  |                                                |                                          |
|---------------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------|------------------------------------------|
| <b>FCC ID:</b> BCGA3300<br><b>IC:</b> 579C-A3300  |  | <b>Test Dates:</b><br>3/24/2025 - 11/26/2025                                                                                                                                                                     | <b>EUT Type:</b><br>Smart Speaker with Display | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1C2503170028-05-R4.BCG |  | This report is Blockchain Verified. To verify the report authenticity, please visit <a href="https://www.blockchain-verified.com">https://www.blockchain-verified.com</a> or by clicking on the Blockchain logo. |                                                | Page 5 of 175                            |

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **Apple Smart Speaker with Display FCC ID: BCGA3300, IC: 579C-A3300**. The test data contained in this report pertains only to the emissions due to the EUT's WLAN 802.11ax – RU (DTS) transmitter.

**Test Device Serial No.:** HP34WHV7XM, FQYJTXNHYW, YGYD3JMXM, F0THEP000410000NGQ, HV6HEQ0001R0000NGQ

### 2.2 Device Capabilities

This device contains the following capabilities:

802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII (5GHz and 6GHz), 802.15.4, Bluetooth (1x, EDR, LE1M, LE2M)

| Ch. | Frequency (MHz) | Ch. | Frequency (MHz) |
|-----|-----------------|-----|-----------------|
| 1   | 2412            | 8   | 2447            |
| 2   | 2417            | 9   | 2452            |
| 3   | 2422            | 10  | 2457            |
| 4   | 2427            | 11  | 2462            |
| 5   | 2432            | 12  | 2467            |
| 6   | 2437            | 13* | 2472            |
| 7   | 2442            |     |                 |

**Table 2-1. 802.11ax Frequency/ Channel Operations**

\*Channel 13 is disabled for DTS 802.11ax HE20.

**Note:** The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section 6.0 b) of KDB 558074 D01 v05r02 and ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

| 802.11<br>Model/Band |            | Measured Duty Cycles |                    |                |                    |                |                    |
|----------------------|------------|----------------------|--------------------|----------------|--------------------|----------------|--------------------|
|                      |            | Antenna 0            |                    | Antenna 1      |                    | CDD            |                    |
|                      |            | Duty Cycle [%]       | Radiated DCCF [dB] | Duty Cycle [%] | Radiated DCCF [dB] | Duty Cycle [%] | Radiated DCCF [dB] |
| 2.4GHz               | ax (RU26)  | 98.32                | N/A                | 98.32          | N/A                | 98.58          | N/A                |
| 2.4GHz               | ax (RU242) | 98.47                | N/A                | 97.73          | N/A                | 97.95          | 0.09               |

**Table 2-2. Measured Duty Cycles**

|                                                   |                                                                                     |                                                                                                                                                                                                                  |                                                |                                          |
|---------------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------|------------------------------------------|
| <b>FCC ID:</b> BCGA3300<br><b>IC:</b> 579C-A3300  |  | <b>Test Dates:</b><br>3/24/2025 - 11/26/2025                                                                                                                                                                     | <b>EUT Type:</b><br>Smart Speaker with Display | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1C2503170028-05-R4.BCG |  | This report is Blockchain Verified. To verify the report authenticity, please visit <a href="https://www.blockchain-verified.com">https://www.blockchain-verified.com</a> or by clicking on the Blockchain logo. |                                                | Page 6 of 175                            |

The device employs CDD technology. Below are the possible configurations.

| WiFi Configurations |      | SISO      |           | SDM       |           | CDD       |           |
|---------------------|------|-----------|-----------|-----------|-----------|-----------|-----------|
|                     |      | Antenna 0 | Antenna 1 | Antenna 0 | Antenna 1 | Antenna 0 | Antenna 1 |
| 2.4GHz              | 11ax | ✓         | ✓         | ✓         | ✓         | ✓         | ✓         |

**Table 2-3. WiFi Configurations**

✓ = Support ; ✗ = NOT Support

**SISO** = Single Input Single Output

**SDM** = Spatial Diversity Multiplexing – CDD function

**CDD** = Cyclic Delay Diversity - 2Tx Function

The device supports the following data rates (shown in Mbps):

| MCS Index | Spatial Stream | MU-OFDMA (802.11ax) |          |          |            |          |          |             |          |          |             |          |          |
|-----------|----------------|---------------------|----------|----------|------------|----------|----------|-------------|----------|----------|-------------|----------|----------|
|           |                | 26-tone RU          |          |          | 52-tone RU |          |          | 106-tone RU |          |          | 242-tone RU |          |          |
|           |                | 0.8μs GI            | 1.6μs GI | 3.2μs GI | 0.8μs GI   | 1.6μs GI | 3.2μs GI | 0.8μs GI    | 1.6μs GI | 3.2μs GI | 0.8μs GI    | 1.6μs GI | 3.2μs GI |
| 0         | 1              | 0.9                 | 0.8      | 0.8      | 1.8        | 1.7      | 1.5      | 3.8         | 3.5      | 3.2      | 8.6         | 8.1      | 7.3      |
| 1         | 1              | 1.8                 | 1.7      | 1.5      | 3.5        | 3.3      | 3        | 7.5         | 7.1      | 6.4      | 17.2        | 16.3     | 14.6     |
| 2         | 1              | 2.6                 | 2.5      | 2.3      | 5.3        | 5        | 4.5      | 11.3        | 10.6     | 9.6      | 25.8        | 24.4     | 21.9     |
| 3         | 1              | 3.5                 | 3.3      | 3        | 7.1        | 6.7      | 6        | 15          | 14.2     | 12.8     | 34.4        | 32.5     | 29.3     |
| 4         | 1              | 5.3                 | 5        | 4.5      | 10.6       | 10       | 9        | 22.5        | 21.3     | 19.1     | 51.6        | 48.8     | 43.9     |
| 5         | 1              | 7.1                 | 6.7      | 6        | 14.1       | 13.3     | 12       | 30          | 28.3     | 25.5     | 68.8        | 65       | 58.5     |
| 6         | 1              | 7.9                 | 7.5      | 6.8      | 15.9       | 15       | 13.5     | 33.8        | 31.9     | 28.7     | 77.4        | 73.1     | 65.8     |
| 7         | 1              | 8.8                 | 8.3      | 7.5      | 17.6       | 16.7     | 15       | 37.5        | 35.4     | 31.9     | 86          | 81.3     | 73.1     |
| 8         | 1              | 10.6                | 10       | 9        | 21.2       | 20       | 18       | 45          | 42.5     | 38.3     | 103.2       | 97.5     | 87.8     |
| 9         | 1              | 11.8                | 11.1     | 10       | 23.5       | 22.2     | 20       | 50          | 47.2     | 42.5     | 114.7       | 108.3    | 97.5     |
| 10        | 1              | 13.2                | 12.5     | 11.3     | 26.5       | 25       | 22.5     | 56.3        | 53.1     | 47.8     | 129         | 121.9    | 109.7    |
| 11        | 1              | 14.7                | 13.9     | 12.5     | 29.4       | 27.8     | 25       | 62.5        | 59       | 53.1     | 143.4       | 135.4    | 121.9    |
| 0         | 2              | 1.8                 | 1.7      | 1.5      | 3.5        | 3.3      | 3        | 7.5         | 7.1      | 6.4      | 17.2        | 16.3     | 14.6     |
| 1         | 2              | 3.5                 | 3.3      | 3        | 7.1        | 6.7      | 6        | 15          | 14.2     | 12.8     | 34.4        | 32.5     | 29.3     |
| 2         | 2              | 5.3                 | 5        | 4.5      | 10.6       | 10       | 9        | 22.5        | 21.3     | 19.1     | 51.6        | 48.8     | 43.9     |
| 3         | 2              | 7.1                 | 6.7      | 6        | 14.1       | 13.3     | 12       | 30          | 28.3     | 25.5     | 68.8        | 65       | 58.5     |
| 4         | 2              | 10.6                | 10       | 9        | 21.2       | 20       | 18       | 45          | 42.5     | 38.3     | 103.2       | 97.5     | 87.8     |
| 5         | 2              | 14.1                | 13.3     | 12       | 28.2       | 26.7     | 24       | 60          | 56.7     | 51       | 137.6       | 130      | 117      |
| 6         | 2              | 15.9                | 15       | 13.5     | 31.8       | 30       | 27       | 67.5        | 63.8     | 57.4     | 154.9       | 146.3    | 131.6    |
| 7         | 2              | 17.6                | 16.7     | 15       | 35.3       | 33.3     | 30       | 75          | 70.8     | 63.8     | 172.1       | 162.5    | 146.3    |
| 8         | 2              | 21.2                | 20       | 18       | 42.4       | 40       | 36       | 90          | 85       | 76.5     | 206.5       | 195      | 175.5    |
| 9         | 2              | 23.5                | 22.2     | 20       | 47.1       | 44.4     | 40       | 100         | 94.4     | 85       | 229.4       | 216.7    | 195      |

**Table 2-4. Supported Data Rates**

|                                                   |                                                                                     |                                                                                                                                                                                                                  |                                                |                                          |
|---------------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------|------------------------------------------|
| <b>FCC ID:</b> BCGA3300<br><b>IC:</b> 579C-A3300  |  | <b>Test Dates:</b><br>3/24/2025 - 11/26/2025                                                                                                                                                                     | <b>EUT Type:</b><br>Smart Speaker with Display | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1C2503170028-05-R4.BCG |  | This report is Blockchain Verified. To verify the report authenticity, please visit <a href="https://www.blockchain-verified.com">https://www.blockchain-verified.com</a> or by clicking on the Blockchain logo. |                                                | Page 7 of 175                            |

This device supports simultaneous transmission operations, which allows multiple transmitters to transmit simultaneously on the same antenna. The table below shows all configurations possible.

| Antenna   | Simultaneous Tx Config | Bluetooth 2.4GHz | Thread   | WLAN             | WIFI 5GHz        | WIFI 6GHz   |
|-----------|------------------------|------------------|----------|------------------|------------------|-------------|
|           |                        | BDR, EDR, LE1/2M | 892.15.4 | 802.11 b/g/ac/ax | 802.11 a/n/ac/ax | 802.11 a/ax |
| Antenna 0 | Config 1               | ✓                | ✗        | ✗                | ✓                | ✗           |
| Antenna 1 | Config 2               | ✗                | ✓        | ✗                | ✓                | ✗           |
| Antenna 0 | Config 3               | ✓                | ✗        | ✗                | ✗                | ✓           |
| Antenna 1 | Config 4               | ✗                | ✓        | ✗                | ✗                | ✓           |

**Table 2-5. Simultaneous Transmission Configurations**

✓ = Support; ✗ = Not Support

**Note:**

All the above simultaneous transmission configurations have been tested and the worst-case configuration was found to be Config 2 and reported in RF 802.15.4 and RF UNII OFDM test reports.

## 2.3 Antenna Description

Following antenna gains provided by manufacturer were used for testing.

| Frequency [GHz] | Antenna Gain (dBi) |           |
|-----------------|--------------------|-----------|
|                 | Antenna 0          | Antenna 1 |
| 2.4             | 1.39               | 1.48      |

**Table 2-6. Highest Antenna Gain**

|                                                   |                                                                                     |                                                                                                                                                                                                                  |                                                |                                          |
|---------------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------|------------------------------------------|
| <b>FCC ID:</b> BCGA3300<br><b>IC:</b> 579C-A3300  |  | <b>Test Dates:</b><br>3/24/2025 - 11/26/2025                                                                                                                                                                     | <b>EUT Type:</b><br>Smart Speaker with Display | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1C2503170028-05-R4.BCG |  | This report is Blockchain Verified. To verify the report authenticity, please visit <a href="https://www.blockchain-verified.com">https://www.blockchain-verified.com</a> or by clicking on the Blockchain logo. |                                                | Page 8 of 175                            |

## 2.4 Test Support Equipment

|   |                   |        |              |      |                   |
|---|-------------------|--------|--------------|------|-------------------|
| 1 | Apple MacBook Pro | Model: | A2141        | S/N: | C02H604EQ05D      |
|   | w/AC/DC Adapter   | Model: | A2166        | S/N: | C4H042705ZNPM0WA6 |
| 2 | Apple USB-C Cable | Model: | Banana Split | S/N: | 200730            |
|   |                   |        |              |      |                   |
| 3 | USB-C Cable       | Model: | A246C        | S/N: | DWH80115BK826GV19 |
|   | w/ AC Adapter     | Model: | A2305        | S/N: | C4H95160004PF4F4V |

**Table 2-7. Test Support Equipment List**

## 2.5 Test Configuration

The EUT was tested per the guidance of ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 and KDB 558074 D01 v05r02. ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 was used to reference the appropriate EUT setup for radiated spurious emissions testing. See Sections 3.2 for radiated emissions test setups, and 7.2, 7.3, 7.4, 7.5, 7.6, and 7.7 for antenna port conducted emissions test setups.

For emissions from 1GHz – 18GHz, low, mid, and high channels were tested with highest power and worst case configuration. The emissions below 1GHz and above 18GHz were tested with the highest transmitting power and the worst case channel were reported.

The EUT was placed in one orthogonal plane of Z-orientation (portrait) during the testing. Only the worst case emissions were reported in this test report.

For AC line conducted and radiated test below 1GHz, following configuration were investigated and EUT powered by AC/DC was the worst case.

- EUT powered by an AC/DC Adapter via USB-C cable

802.11ax HE20 2Tx CDD mode test data provided in this report covers 802.11ax HE20 2Tx SDM.

For 802.11b/g/n/ax-SU test results, see separate WLAN report, 1C2503170028-04-R4.BCG

Both Antenna 0 and Antenna 1 supports two signal paths (Dedicated and Common) to a single port via a splitter, with Common path power equal to or lower than Dedicated path power.

## 2.6 Software and Firmware

The test was conducted with firmware version 22w173 installed on the EUT.

## 2.7 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

|                                                   |                                                                                     |                                                                                                                                                                                                                  |                                                |                                          |
|---------------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------|------------------------------------------|
| <b>FCC ID:</b> BCGA3300<br><b>IC:</b> 579C-A3300  |  | <b>Test Dates:</b><br>3/24/2025 - 11/26/2025                                                                                                                                                                     | <b>EUT Type:</b><br>Smart Speaker with Display | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1C2503170028-05-R4.BCG |  | This report is Blockchain Verified. To verify the report authenticity, please visit <a href="https://www.blockchain-verified.com">https://www.blockchain-verified.com</a> or by clicking on the Blockchain logo. |                                                | Page 9 of 175                            |

## 3.0 DESCRIPTION OF TESTS

### 3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024) and the guidance provided in KDB 558074 D01 v05r02 were used in the measurement of the EUT.

Deviation from measurement procedure.....None

### 3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 7m x 3.66m x 2.7m shielded enclosure. The shielded enclosure is manufactured by AP Americas. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-6. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is EPCOS 2X60A Power Line Filter (100dB Attenuation, 14kHz-18GHz) and the two EPCOs 2X48A filters (100dB Minimum Insertion Loss, 14kHz - 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference groundplane. Power cables for support equipment were routed down to the second LISN while ensuring that the cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 7.10. Automated test software was used to perform the AC line conducted emissions testing. Automated measurement software utilized is Rohde & Schwarz EMC32, Version 10.50.40.

|                                            |                                                                                     |                                                                                                                                                                                                                  |                                         |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|-----------------------------------|
| FCC ID: BCGA3300<br>IC: 579C-A3300         |  | Test Dates:<br>3/24/2025 - 11/26/2025                                                                                                                                                                            | EUT Type:<br>Smart Speaker with Display | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2503170028-05-R4.BCG |  | This report is Blockchain Verified. To verify the report authenticity, please visit <a href="https://www.blockchain-verified.com">https://www.blockchain-verified.com</a> or by clicking on the Blockchain logo. |                                         | Page 10 of 175                    |

### 3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

Per KDB 414788 D01 v01r01, radiated emission test sites other than open-field test sites (e.g., shielded anechoic chambers), may be employed for emission measurements below 30MHz if characterized so that the measurements correspond to those obtained at an open-field test site. To determine test site equivalency, a reference sample transmitting at 149kHz was measured on an open field test site (asphalt with no ground plane) and then measured in the 3m semi-anechoic chamber. A calibrated 60cm loop antenna was rotated about its vertical axis while the reference device was rotated through the X, Y and Z axis in order to capture the worst case level. A maximum deviation of 2.77dB at 149kHz was measured when comparing the 3 meter semi-anechoic chamber to the open field site.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

### 3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

|                                                   |                                                                                     |                                                                                                                                                                                                                  |                                                |                                          |
|---------------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------|------------------------------------------|
| <b>FCC ID:</b> BCGA3300<br><b>IC:</b> 579C-A3300  |  | <b>Test Dates:</b><br>3/24/2025 - 11/26/2025                                                                                                                                                                     | <b>EUT Type:</b><br>Smart Speaker with Display | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1C2503170028-05-R4.BCG |  | This report is Blockchain Verified. To verify the report authenticity, please visit <a href="https://www.blockchain-verified.com">https://www.blockchain-verified.com</a> or by clicking on the Blockchain logo. |                                                | Page 11 of 175                           |

## 4.0 ANTENNA REQUIREMENTS

### Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connections to an external antenna.

### Conclusion:

The EUT unit complies with the requirement of §15.203.

|                                                   |                                                                                     |                                                                                                                                                                                                                  |                                                |                                          |
|---------------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------|------------------------------------------|
| <b>FCC ID:</b> BCGA3300<br><b>IC:</b> 579C-A3300  |  | <b>Test Dates:</b><br>3/24/2025 - 11/26/2025                                                                                                                                                                     | <b>EUT Type:</b><br>Smart Speaker with Display | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1C2503170028-05-R4.BCG |  | This report is Blockchain Verified. To verify the report authenticity, please visit <a href="https://www.blockchain-verified.com">https://www.blockchain-verified.com</a> or by clicking on the Blockchain logo. |                                                | Page 12 of 175                           |

## 5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.23-2012. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

| Contribution                        | Expanded Uncertainty ( $\pm$ dB) |
|-------------------------------------|----------------------------------|
| Conducted Bench Top Measurements    | 2.07                             |
| Line Conducted Disturbance          | 1.91                             |
| Radiated Disturbance (<30MHz)       | 4.12                             |
| Radiated Disturbance (30MHz - 1GHz) | 4.85                             |
| Radiated Disturbance (1 - 18GHz)    | 5.08                             |
| Radiated Disturbance (>18GHz)       | 5.22                             |

|                                                   |                                                                                     |                                                                                                                                                                                                                  |                                                |                                          |
|---------------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------|------------------------------------------|
| <b>FCC ID:</b> BCGA3300<br><b>IC:</b> 579C-A3300  |  | <b>Test Dates:</b><br>3/24/2025 - 11/26/2025                                                                                                                                                                     | <b>EUT Type:</b><br>Smart Speaker with Display | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1C2503170028-05-R4.BCG |  | This report is Blockchain Verified. To verify the report authenticity, please visit <a href="https://www.blockchain-verified.com">https://www.blockchain-verified.com</a> or by clicking on the Blockchain logo. |                                                | Page 13 of 175                           |

V 12.0 03/03/2026

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

## 6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance with the requirements of ANSI C63.5-2017.

| Manufacturer           | Model                    | Description                            | Cal Date   | Cal Interval | Cal Due    | Serial Number |
|------------------------|--------------------------|----------------------------------------|------------|--------------|------------|---------------|
| Anritsu                | ML2495A                  | Power Meter                            | 7/8/2024   | Annual       | 7/8/2025   | 1039008       |
| Anritsu                | MA2411B                  | Pulse Power Sensor                     | 7/1/2024   | Annual       | 7/1/2025   | 1911105       |
| Anritsu                | MA2411B                  | Pulse Power Sensor                     | 10/21/2024 | Annual       | 10/21/2025 | 1027293       |
| Rohde & Schwarz        | 180-422-KF               | 20dB Nominal Gain Horn Antenna         | 3/24/2025  | Annual       | 3/24/2026  | T058601-03    |
| ETS-Lindgren           | 3117                     | Double Ridged Guide Antenna (1-18 GHz) | 9/16/2024  | Annual       | 9/16/2025  | 240049        |
| Fairview Microwave/MCL | FMCA1975-36/BW-K10-2W44+ | 30MHz-40GHz RF Cable/Attenuator *      | 6/10/2024  | Annual       | 6/10/2025  | -             |
| Keysight Technology    | N9040B                   | UXA Signal Analyzer                    | 7/16/2024  | Annual       | 7/16/2025  | US57212289    |
| Keysight Technology    | N9030A                   | PXA Signal Analyzer                    | 7/11/2024  | Annual       | 7/11/2025  | MY49430244    |
| Rohde & Schwarz        | TS-PR18                  | Pre-Amplifier (1GHz - 18GHz)           | 8/14/2024  | Annual       | 8/14/2025  | 101648        |
| Rohde & Schwarz        | FSV40-N                  | Signal Analyzer (10Hz-40GHz)           | 9/6/2024   | Annual       | 9/6/2025   | 101814        |
| Rohde & Schwarz        | ESW44                    | EMI Test Receiver                      | 10/17/2024 | Annual       | 10/17/2025 | 101668        |
| Rohde & Schwarz        | TS-PR8                   | Pre-Amplifier (30MHz - 8GHz)           | 7/3/2024   | Annual       | 7/3/2025   | 102356        |
| Rohde & Schwarz        | TS-PR1840                | Pre-Amplifier (18GHz - 40GHz)          | 6/10/2024  | Annual       | 6/10/2025  | 100057        |
| Rohde & Schwarz        | HFH2-Z2                  | Loop Antenna                           | 6/21/2024  | Annual       | 6/21/2025  | 100519        |
| Rohde & Schwarz        | ENV216                   | Two-Line V-Network                     | 7/12/2024  | Annual       | 7/12/2025  | 101363        |
| Rohde & Schwarz        | SMW200A                  | Vector Signal Generator                | 7/5/2023   | Biennial     | 7/5/2025   | 107818        |

**Table 6-1. Test Equipment List**

### Note:

- For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
- \* denotes passive equipment that have been internally verified/calibrated.

|                                            |                                                                                     |                                                                                                                                                                                                                  |                                         |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|-----------------------------------|
| FCC ID: BCGA3300<br>IC: 579C-A3300         |  | Test Dates:<br>3/24/2025 - 11/26/2025                                                                                                                                                                            | EUT Type:<br>Smart Speaker with Display | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2503170028-05-R4.BCG |  | This report is Blockchain Verified. To verify the report authenticity, please visit <a href="https://www.blockchain-verified.com">https://www.blockchain-verified.com</a> or by clicking on the Blockchain logo. |                                         | Page 14 of 175                    |

## 7.0 TEST RESULTS

### 7.1 Summary

Company Name: Apple Inc.

FCC ID: BCGA3300

IC: 579C-A3300

FCC Classification: Digital Transmission System (DTS)

| FCC Part Section(s) | RSS Section(s)     | Test Description                                                              | Test Limit                                                                                       | Test Condition    | Test Result | Reference         |
|---------------------|--------------------|-------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|-------------------|-------------|-------------------|
| 15.247(a)(2)        | RSS-247 [6.3.1(a)] | 6dB Bandwidth                                                                 | > 500kHz                                                                                         | CONDUCTED         | PASS        | Section 7.3       |
| 2.1049              | RSS-Gen [5.1]      | Occupied Bandwidth                                                            | N/A                                                                                              |                   | N/A         | Section 7.2       |
| 15.247(b)(3)        | RSS-247 [6.3.2]    | Transmitter Output Power                                                      | < 1 Watt                                                                                         |                   | PASS        | Sections 7.4      |
| 15.247(e)           | RSS-247 [6.3.1(b)] | Transmitter Power Spectral Density                                            | < 8dBm / 3kHz Band                                                                               |                   | PASS        | Section 7.5       |
| 15.247(d)           | RSS-247 [6.6]      | Band Edge / Out-of-Band Emissions                                             | ≥ 20dBc                                                                                          |                   | PASS        | Sections 7.5, 7.6 |
| 15.205<br>15.209    | RSS-Gen [7.4.3]    | General Field Strength Limits (Restricted Bands and Radiated Emission Limits) | Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-Gen [7.4.3]) | RADIATED          | PASS        | Sections 7.7, 7.9 |
| 15.207              | RSS-Gen [7.4.2]    | AC Conducted Emissions 150kHz – 30MHz                                         | < FCC 15.207 limits (RSS-Gen [7.4.2])                                                            | AC LINE CONDUCTED | PASS        | Section 7.10      |

**Table 7-1. Summary of Test Results**

#### Notes:

- All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element “Conducted Automation,” Version 1.4.0.
- For radiated testing, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element “Chamber Automation,” Version 3.4.2.
- 802.11ax OFDMA testing was performed for all signal tone configurations as specified by the 802.11ax standard. Worst case results are determined and reported per the guidance provided at the October 2018 TCB Workshop.
- Only one RU index could be selected at a time so no contiguous or non-contiguous RU's were considered for testing.

|                                            |                                                                                     |                                                                                                                                                                                                                  |                                         |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|-----------------------------------|
| FCC ID: BCGA3300<br>IC: 579C-A3300         |  | Test Dates:<br>3/24/2025 - 11/26/2025                                                                                                                                                                            | EUT Type:<br>Smart Speaker with Display | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2503170028-05-R4.BCG |  | This report is Blockchain Verified. To verify the report authenticity, please visit <a href="https://www.blockchain-verified.com">https://www.blockchain-verified.com</a> or by clicking on the Blockchain logo. |                                         | Page 15 of 175                    |

## 7.2 99% Occupied Bandwidth Measurement

### Test Overview and Limit

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

### Test Procedure Used

ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 – Subclause 6.9.3  
RSS-Gen [5.1]

### Test Settings

1. The signal analyzers' automatic bandwidth measurement capability of the spectrum analyzer was used to perform the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. Span = between 1.5x to 5x the OBW
3. RBW = in the range of 1- 5% of the OBW
4. VBW  $\geq 3 \times$  RBW
5. Detector = Peak
6. Trace mode = max hold
7. Sweep = auto couple
8. The trace was allowed to stabilize
9. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

|                                                   |                                                                                     |                                                                                                                                                                                                                  |                                                |                                          |
|---------------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------|------------------------------------------|
| <b>FCC ID:</b> BCGA3300<br><b>IC:</b> 579C-A3300  |  | <b>Test Dates:</b><br>3/24/2025 - 11/26/2025                                                                                                                                                                     | <b>EUT Type:</b><br>Smart Speaker with Display | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1C2503170028-05-R4.BCG |  | This report is Blockchain Verified. To verify the report authenticity, please visit <a href="https://www.blockchain-verified.com">https://www.blockchain-verified.com</a> or by clicking on the Blockchain logo. |                                                | Page 16 of 175                           |

## Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 7-1. Test Instrument & Measurement Setup**

## Test Notes

1. All antenna configurations and data rates were investigated and only the worst case is reported
2. All RU's were investigated and tabular data has been reported. Only worst case partially-loaded and fully-loaded RU's plot are reported.

|                                                   |                                                                                     |                                                                                                                                                                                                                  |                                                |                                          |
|---------------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------|------------------------------------------|
| <b>FCC ID:</b> BCGA3300<br><b>IC:</b> 579C-A3300  |  | <b>Test Dates:</b><br>3/24/2025 - 11/26/2025                                                                                                                                                                     | <b>EUT Type:</b><br>Smart Speaker with Display | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1C2503170028-05-R4.BCG |  | This report is Blockchain Verified. To verify the report authenticity, please visit <a href="https://www.blockchain-verified.com">https://www.blockchain-verified.com</a> or by clicking on the Blockchain logo. |                                                | Page 17 of 175                           |

## 7.2.1 Antenna 0 (Common) 99% Occupied Bandwidth Measurements


| Frequency [MHz] | Channel | 802.11 MODE | RU Size | RU Index | Data Rate [Mbps] | Measured 99% Occupied Bandwidth [MHz] |
|-----------------|---------|-------------|---------|----------|------------------|---------------------------------------|
| 2412            | 1       | ax          | 26      | 0        | 10/11.8 (MCS9)   | 19.02                                 |
|                 |         |             | 26      | 4        | 10/11.8 (MCS9)   | 17.33                                 |
|                 |         |             | 26      | 8        | 10/11.8 (MCS9)   | 19.06                                 |
| 2437            | 6       | ax          | 26      | 0        | 10/11.8 (MCS9)   | 19.26                                 |
|                 |         |             | 26      | 4        | 10/11.8 (MCS9)   | 17.32                                 |
|                 |         |             | 26      | 8        | 10/11.8 (MCS9)   | 19.34                                 |
| 2462            | 11      | ax          | 26      | 0        | 10/11.8 (MCS9)   | 19.26                                 |
|                 |         |             | 26      | 4        | 10/11.8 (MCS9)   | 17.34                                 |
|                 |         |             | 26      | 8        | 10/11.8 (MCS9)   | 19.26                                 |

Table 7-2. 99% OBW Measurements Antenna 0 (Common) – RU26

| Frequency [MHz] | Channel | 802.11 MODE | RU Size | RU Index | Data Rate [Mbps]  | Measured 99% Occupied Bandwidth [MHz] |
|-----------------|---------|-------------|---------|----------|-------------------|---------------------------------------|
| 2412            | 1       | ax          | 242     | 61       | 97.5/114.7 (MCS9) | 28.34                                 |
| 2437            | 6       | ax          | 242     | 61       | 97.5/114.7 (MCS9) | 26.39                                 |
| 2462            | 11      | ax          | 242     | 61       | 97.5/114.7 (MCS9) | 29.52                                 |

Table 7-3. 99% OBW Measurements Antenna 0 (Common)– RU242

|                                            |                                                                                     |                                                                                                                                                                                                                  |                                         |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|-----------------------------------|
| FCC ID: BCGA3300<br>IC: 579C-A3300         |  | Test Dates:<br>3/24/2025 - 11/26/2025                                                                                                                                                                            | EUT Type:<br>Smart Speaker with Display | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2503170028-05-R4.BCG |  | This report is Blockchain Verified. To verify the report authenticity, please visit <a href="https://www.blockchain-verified.com">https://www.blockchain-verified.com</a> or by clicking on the Blockchain logo. |                                         | Page 18 of 175                    |

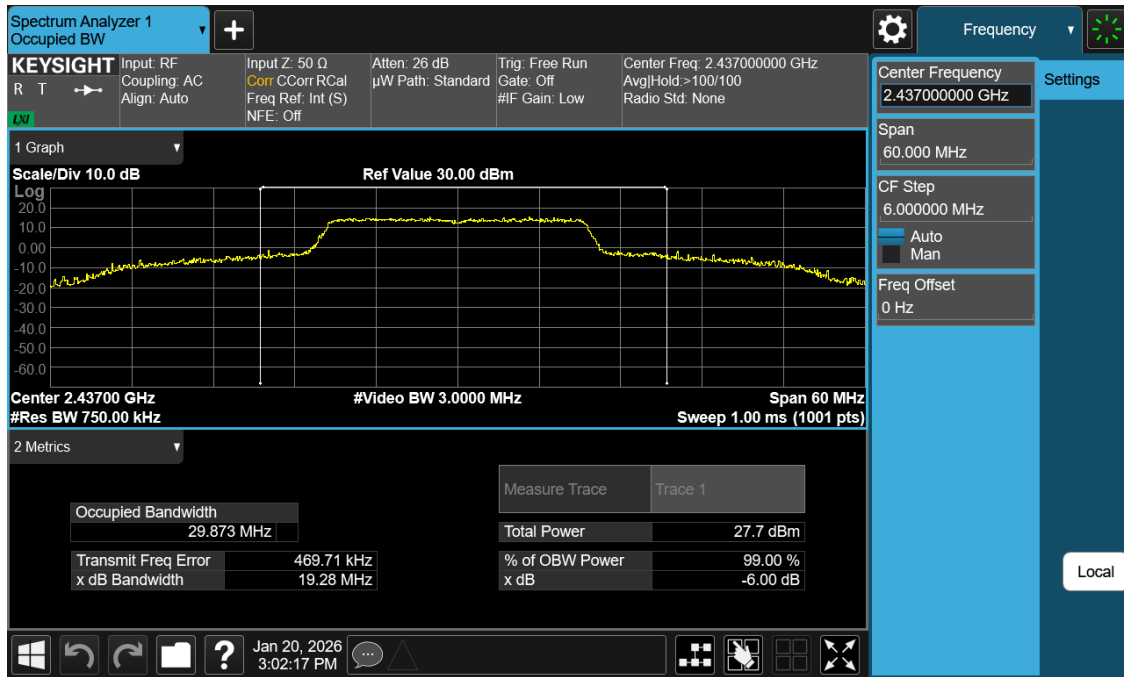

## 7.2.2 Antenna 1 (Common) 99% Occupied Bandwidth Measurements



| Frequency [MHz] | Channel | 802.11 MODE | RU Size | RU Index | Data Rate [Mbps] | Measured 99% Occupied Bandwidth [MHz] |
|-----------------|---------|-------------|---------|----------|------------------|---------------------------------------|
| 2412            | 1       | ax          | 26      | 0        | 10/11.8 (MCS9)   | 18.66                                 |
|                 |         |             | 26      | 4        | 10/11.8 (MCS9)   | 17.47                                 |
|                 |         |             | 26      | 8        | 10/11.8 (MCS9)   | 19.18                                 |
| 2437            | 6       | ax          | 26      | 0        | 10/11.8 (MCS9)   | 19.44                                 |
|                 |         |             | 26      | 4        | 10/11.8 (MCS9)   | 17.41                                 |
|                 |         |             | 26      | 8        | 10/11.8 (MCS9)   | 19.41                                 |
| 2462            | 11      | ax          | 26      | 0        | 10/11.8 (MCS9)   | 19.41                                 |
|                 |         |             | 26      | 4        | 10/11.8 (MCS9)   | 17.36                                 |
|                 |         |             | 26      | 8        | 10/11.8 (MCS9)   | 19.38                                 |

Table 7-4. 99% OBW Measurements Antenna 1 (Common)

| Frequency [MHz] | Channel | 802.11 MODE | RU Size | RU Index | Data Rate [Mbps]  | Measured 99% Occupied Bandwidth [MHz] |
|-----------------|---------|-------------|---------|----------|-------------------|---------------------------------------|
| 2412            | 1       | ax          | 242     | 61       | 97.5/114.7 (MCS9) | 28.74                                 |
| 2437            | 6       | ax          | 242     | 61       | 97.5/114.7 (MCS9) | 29.43                                 |
| 2462            | 11      | ax          | 242     | 61       | 97.5/114.7 (MCS9) | 28.85                                 |

Table 7-5. 99% OBW Measurements Antenna 1 (Common)

|                                            |                                                                                     |                                                                                                                                                                                                                  |                                         |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|-----------------------------------|
| FCC ID: BCGA3300<br>IC: 579C-A3300         |  | Test Dates:<br>3/24/2025 - 11/26/2025                                                                                                                                                                            | EUT Type:<br>Smart Speaker with Display | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2503170028-05-R4.BCG |  | This report is Blockchain Verified. To verify the report authenticity, please visit <a href="https://www.blockchain-verified.com">https://www.blockchain-verified.com</a> or by clicking on the Blockchain logo. |                                         | Page 20 of 175                    |

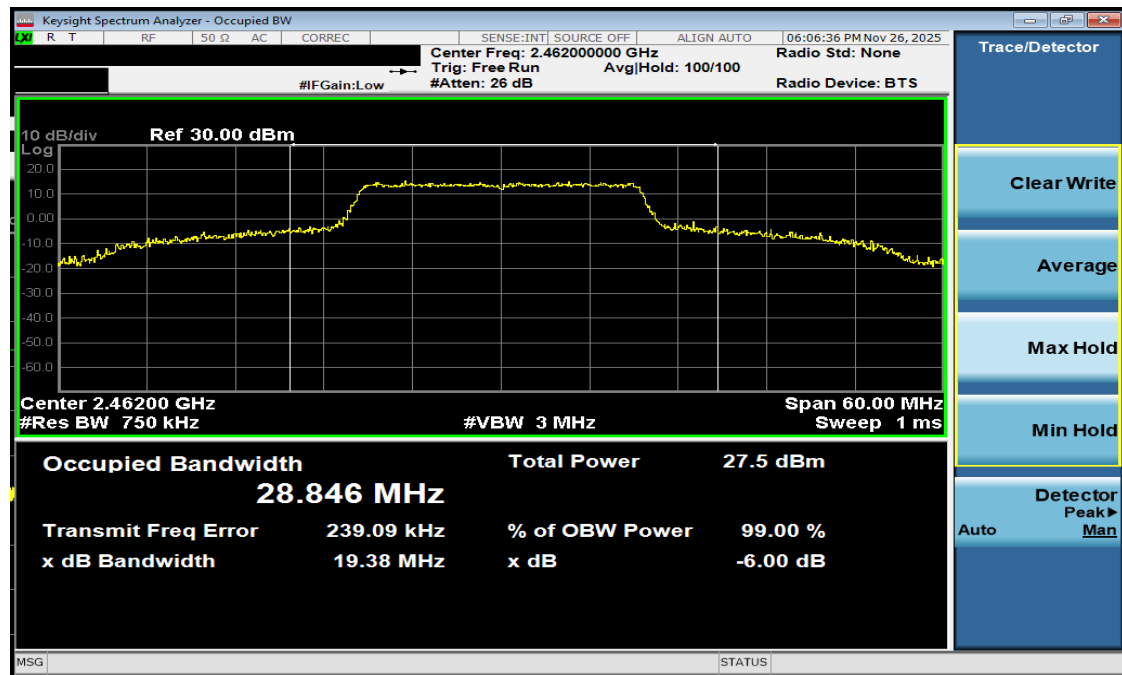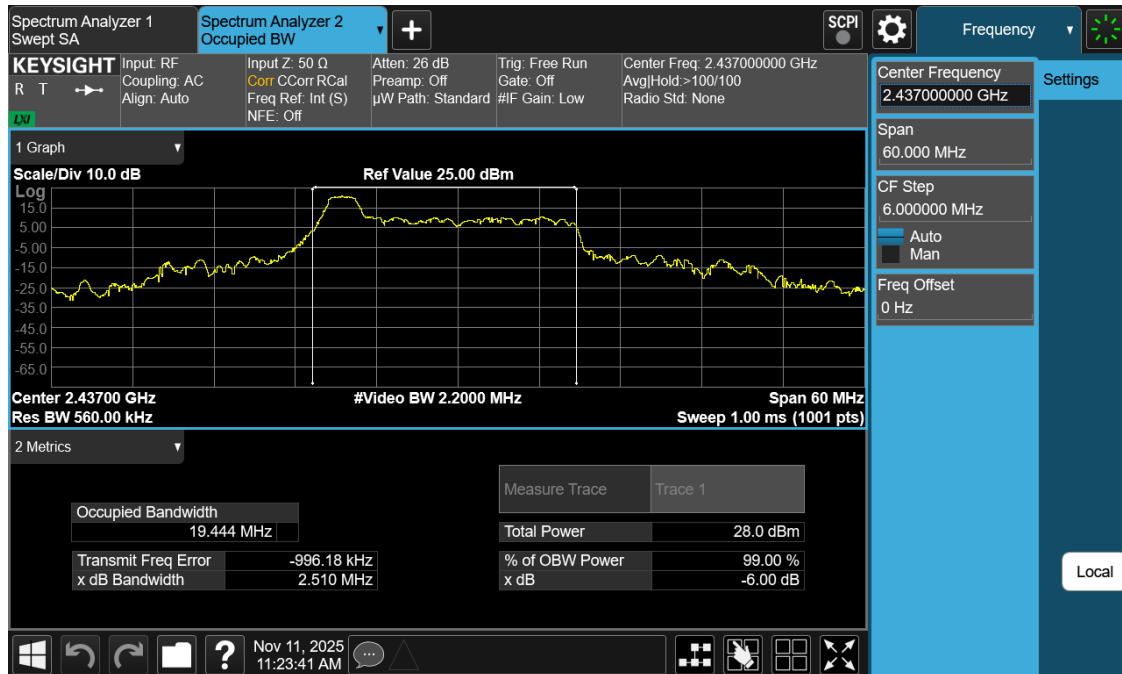

|                                            |                                                                                     |                                                                                                                                                                                                                  |                                         |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|-----------------------------------|
| FCC ID: BCGA3300<br>IC: 579C-A3300         |  | Test Dates:<br>3/24/2025 - 11/26/2025                                                                                                                                                                            | EUT Type:<br>Smart Speaker with Display | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2503170028-05-R4.BCG |  | This report is Blockchain Verified. To verify the report authenticity, please visit <a href="https://www.blockchain-verified.com">https://www.blockchain-verified.com</a> or by clicking on the Blockchain logo. |                                         | Page 21 of 175                    |

### 7.2.3 Antenna 0 (Dedicated) 99% Occupied Bandwidth Measurements

| Frequency [MHz] | Channel | 802.11 MODE | RU Size | RU Index | Data Rate [Mbps] | Measured 99% Occupied Bandwidth [MHz] |
|-----------------|---------|-------------|---------|----------|------------------|---------------------------------------|
| 2412            | 1       | ax          | 26      | 0        | 10/11.8 (MCS9)   | 18.61                                 |
|                 |         |             | 26      | 4        | 10/11.8 (MCS9)   | 17.23                                 |
|                 |         |             | 26      | 8        | 10/11.8 (MCS9)   | 18.80                                 |
| 2437            | 6       | ax          | 26      | 0        | 10/11.8 (MCS9)   | 19.24                                 |
|                 |         |             | 26      | 4        | 10/11.8 (MCS9)   | 17.25                                 |
|                 |         |             | 26      | 8        | 10/11.8 (MCS9)   | 19.17                                 |
| 2462            | 11      | ax          | 26      | 0        | 10/11.8 (MCS9)   | 19.09                                 |
|                 |         |             | 26      | 4        | 10/11.8 (MCS9)   | 17.20                                 |
|                 |         |             | 26      | 8        | 10/11.8 (MCS9)   | 19.15                                 |

Table 7-6. 99% OBW Measurements Antenna 0 (Dedicated) – RU26

| Frequency [MHz] | Channel | 802.11 MODE | RU Size | RU Index | Data Rate [Mbps]  | Measured 99% Occupied Bandwidth [MHz] |
|-----------------|---------|-------------|---------|----------|-------------------|---------------------------------------|
| 2412            | 1       | ax          | 242     | 61       | 97.5/114.7 (MCS9) | 22.25                                 |
| 2437            | 6       | ax          | 242     | 61       | 97.5/114.7 (MCS9) | 21.62                                 |
| 2462            | 11      | ax          | 242     | 61       | 97.5/114.7 (MCS9) | 20.94                                 |

Table 7-7. 99% OBW Measurements Antenna 0 (Dedicated) – RU242

|                                            |                                                                                     |                                                                                                                                                                                                                  |                                         |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|-----------------------------------|
| FCC ID: BCGA3300<br>IC: 579C-A3300         |  | Test Dates:<br>3/24/2025 - 11/26/2025                                                                                                                                                                            | EUT Type:<br>Smart Speaker with Display | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2503170028-05-R4.BCG |  | This report is Blockchain Verified. To verify the report authenticity, please visit <a href="https://www.blockchain-verified.com">https://www.blockchain-verified.com</a> or by clicking on the Blockchain logo. |                                         | Page 22 of 175                    |



## 7.2.4 Antenna 1 (Dedicated) 99% Occupied Bandwidth Measurements


| Frequency [MHz] | Channel | 802.11 MODE | RU Size | RU Index | Data Rate [Mbps] | Measured 99% Occupied Bandwidth [MHz] |
|-----------------|---------|-------------|---------|----------|------------------|---------------------------------------|
| 2412            | 1       | ax          | 26      | 0        | 10/11.8 (MCS9)   | 18.80                                 |
|                 |         |             | 26      | 4        | 10/11.8 (MCS9)   | 17.33                                 |
|                 |         |             | 26      | 8        | 10/11.8 (MCS9)   | 18.67                                 |
| 2437            | 6       | ax          | 26      | 0        | 10/11.8 (MCS9)   | 19.28                                 |
|                 |         |             | 26      | 4        | 10/11.8 (MCS9)   | 17.19                                 |
|                 |         |             | 26      | 8        | 10/11.8 (MCS9)   | 19.31                                 |
| 2462            | 11      | ax          | 26      | 0        | 10/11.8 (MCS9)   | 19.05                                 |
|                 |         |             | 26      | 4        | 10/11.8 (MCS9)   | 17.21                                 |
|                 |         |             | 26      | 8        | 10/11.8 (MCS9)   | 19.28                                 |

**Table 7-8. 99% OBW Measurements Antenna 1 (Dedicated) – RU26**

| Frequency [MHz] | Channel | 802.11 MODE | RU Size | RU Index | Data Rate [Mbps]  | Measured 99% Occupied Bandwidth [MHz] |
|-----------------|---------|-------------|---------|----------|-------------------|---------------------------------------|
| 2412            | 1       | ax          | 242     | 61       | 97.5/114.7 (MCS9) | 20.44                                 |
| 2437            | 6       | ax          | 242     | 61       | 97.5/114.7 (MCS9) | 20.77                                 |
| 2462            | 11      | ax          | 242     | 61       | 97.5/114.7 (MCS9) | 20.48                                 |

**Table 7-9. 99% OBW Measurements Antenna 1 (Dedicated) – RU242**

|                                                   |                                                                                     |                                                                                                                                                                                                                  |                                                |                                          |
|---------------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------|------------------------------------------|
| <b>FCC ID:</b> BCGA3300<br><b>IC:</b> 579C-A3300  |  | <b>Test Dates:</b><br>3/24/2025 - 11/26/2025                                                                                                                                                                     | <b>EUT Type:</b><br>Smart Speaker with Display | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1C2503170028-05-R4.BCG |  | This report is Blockchain Verified. To verify the report authenticity, please visit <a href="https://www.blockchain-verified.com">https://www.blockchain-verified.com</a> or by clicking on the Blockchain logo. |                                                | Page 24 of 175                           |

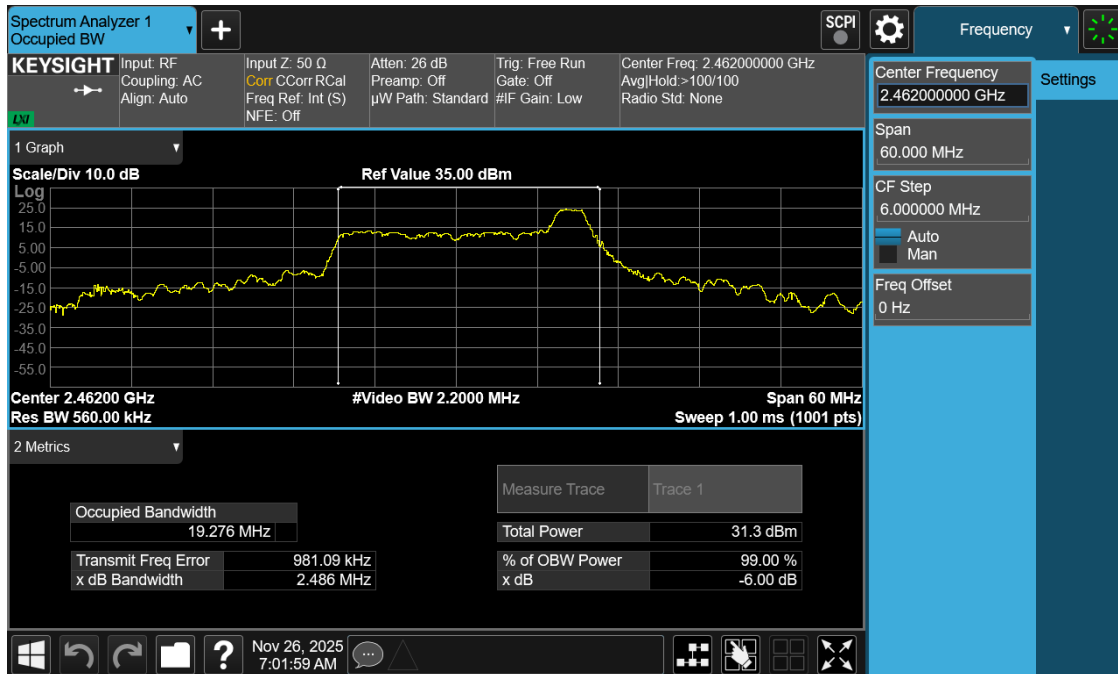

Plot 7-7. 99% OBW Plot Antenna 1 (Dedicated) (802.11ax OFDMA – RU26 Index 8 – Ch. 11)



Plot 7-8. 99% OBW Plot Antenna 1 (Dedicated) (802.11ax OFDMA – RU242 – Ch. 1)

|                                            |                                                                                     |                                                                                                                                                                                                                  |                                         |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|-----------------------------------|
| FCC ID: BCGA3300<br>IC: 579C-A3300         |  | Test Dates:<br>3/24/2025 - 11/26/2025                                                                                                                                                                            | EUT Type:<br>Smart Speaker with Display | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2503170028-05-R4.BCG |  | This report is Blockchain Verified. To verify the report authenticity, please visit <a href="https://www.blockchain-verified.com">https://www.blockchain-verified.com</a> or by clicking on the Blockchain logo. |                                         | Page 25 of 175                    |

## 7.3 6dB Bandwidth Measurement

### Test Overview and Limit

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the transmitter antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated and the worst case configuration results are reported in this section.

***The minimum permissible 6dB bandwidth is 500 kHz.***

### Test Procedure Used

ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 – Subclause 11.8.2 Option 2  
KDB 558074 D01 v05r02 – Section 8.2

### Test Settings

1. The signal analyzers' automatic bandwidth measurement capability of the spectrum analyzer was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to  $X = 6$ . The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 100kHz
3. VBW  $\geq 3 \times$  RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize

|                                                   |                                                                                     |                                                                                                                                                                                                                  |                                                |                                          |
|---------------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------|------------------------------------------|
| <b>FCC ID:</b> BCGA3300<br><b>IC:</b> 579C-A3300  |  | <b>Test Dates:</b><br>3/24/2025 - 11/26/2025                                                                                                                                                                     | <b>EUT Type:</b><br>Smart Speaker with Display | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1C2503170028-05-R4.BCG |  | This report is Blockchain Verified. To verify the report authenticity, please visit <a href="https://www.blockchain-verified.com">https://www.blockchain-verified.com</a> or by clicking on the Blockchain logo. |                                                | Page 26 of 175                           |

## Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 7-2. Test Instrument & Measurement Setup**

## Test Notes

1. All antenna configurations and data rates were investigated and only the worst case is reported
2. All RU's were investigated and tabular data has been reported. Only worst case partially-loaded and fully-loaded RU's plot are reported.

|                                                   |                                                                                     |                                                                                                                                                                                                                  |                                                |                                          |
|---------------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------|------------------------------------------|
| <b>FCC ID:</b> BCGA3300<br><b>IC:</b> 579C-A3300  |  | <b>Test Dates:</b><br>3/24/2025 - 11/26/2025                                                                                                                                                                     | <b>EUT Type:</b><br>Smart Speaker with Display | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1C2503170028-05-R4.BCG |  | This report is Blockchain Verified. To verify the report authenticity, please visit <a href="https://www.blockchain-verified.com">https://www.blockchain-verified.com</a> or by clicking on the Blockchain logo. |                                                | Page 27 of 175                           |

### 7.3.1 Antenna 0 (Common) Bandwidth Measurements


| Frequency [MHz] | Channel | 802.11 MODE | RU Size | RU Index | Data Rate [Mbps] | Measured 6dB Bandwidth [MHz] | Minimum 6dB Bandwidth [MHz] | Pass/Fail |
|-----------------|---------|-------------|---------|----------|------------------|------------------------------|-----------------------------|-----------|
| 2412            | 1       | ax          | 26      | 0        | 10/11.8 (MCS9)   | 2.15                         | 0.50                        | Pass      |
|                 |         |             | 26      | 4        | 10/11.8 (MCS9)   | 2.68                         | 0.50                        | Pass      |
|                 |         |             | 26      | 8        | 10/11.8 (MCS9)   | 2.11                         | 0.50                        | Pass      |
| 2437            | 6       | ax          | 26      | 0        | 10/11.8 (MCS9)   | 2.09                         | 0.50                        | Pass      |
|                 |         |             | 26      | 4        | 10/11.8 (MCS9)   | 2.70                         | 0.50                        | Pass      |
|                 |         |             | 26      | 8        | 10/11.8 (MCS9)   | 2.11                         | 0.50                        | Pass      |
| 2462            | 11      | ax          | 26      | 0        | 10/11.8 (MCS9)   | 2.14                         | 0.50                        | Pass      |
|                 |         |             | 26      | 4        | 10/11.8 (MCS9)   | 2.67                         | 0.50                        | Pass      |
|                 |         |             | 26      | 8        | 10/11.8 (MCS9)   | 2.14                         | 0.50                        | Pass      |

**Table 7-10. 6dB BW Measurements Antenna 0 (Common) – RU26**

| Frequency [MHz] | Channel | 802.11 MODE | RU Size | RU Index | Data Rate [Mbps]  | Measured 6dB Bandwidth [MHz] | Minimum 6dB Bandwidth [MHz] | Pass/Fail |
|-----------------|---------|-------------|---------|----------|-------------------|------------------------------|-----------------------------|-----------|
| 2412            | 1       | ax          | 242     | 61       | 97.5/114.7 (MCS9) | 19.14                        | 0.50                        | Pass      |
| 2437            | 6       | ax          | 242     | 61       | 97.5/114.7 (MCS9) | 19.14                        | 0.50                        | Pass      |
| 2462            | 11      | ax          | 242     | 61       | 97.5/114.7 (MCS9) | 19.16                        | 0.50                        | Pass      |

**Table 7-11. 6dB BW Measurements Antenna 0 (Common)– RU242**

|                                                   |                                                                                     |                                                                                                                                                                                                                  |                                                |                                          |
|---------------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------|------------------------------------------|
| <b>FCC ID:</b> BCGA3300<br><b>IC:</b> 579C-A3300  |  | <b>Test Dates:</b><br>3/24/2025 - 11/26/2025                                                                                                                                                                     | <b>EUT Type:</b><br>Smart Speaker with Display | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1C2503170028-05-R4.BCG |  | This report is Blockchain Verified. To verify the report authenticity, please visit <a href="https://www.blockchain-verified.com">https://www.blockchain-verified.com</a> or by clicking on the Blockchain logo. |                                                | Page 28 of 175                           |

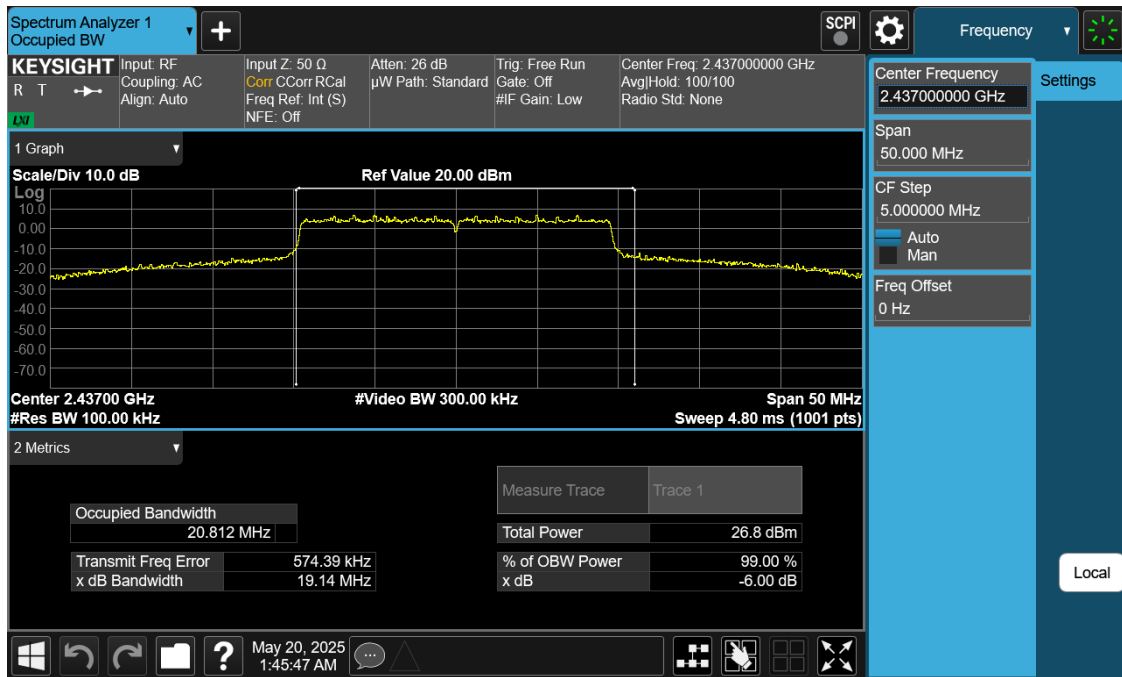

### 7.3.2 Antenna 1 (Common) Bandwidth Measurements



| Frequency [MHz] | Channel | 802.11 MODE | RU Size | RU Index | Data Rate [Mbps] | Measured 6dB Bandwidth [MHz] | Minimum 6dB Bandwidth [MHz] | Pass/Fail |
|-----------------|---------|-------------|---------|----------|------------------|------------------------------|-----------------------------|-----------|
| 2412            | 1       | ax          | 26      | 0        | 10/11.8 (MCS9)   | 2.13                         | 0.50                        | Pass      |
|                 |         |             | 26      | 4        | 10/11.8 (MCS9)   | 2.68                         | 0.50                        | Pass      |
|                 |         |             | 26      | 8        | 10/11.8 (MCS9)   | 2.12                         | 0.50                        | Pass      |
| 2437            | 6       | ax          | 26      | 0        | 10/11.8 (MCS9)   | 2.12                         | 0.50                        | Pass      |
|                 |         |             | 26      | 4        | 10/11.8 (MCS9)   | 2.71                         | 0.50                        | Pass      |
|                 |         |             | 26      | 8        | 10/11.8 (MCS9)   | 2.14                         | 0.50                        | Pass      |
| 2462            | 11      | ax          | 26      | 0        | 10/11.8 (MCS9)   | 2.15                         | 0.50                        | Pass      |
|                 |         |             | 26      | 4        | 10/11.8 (MCS9)   | 2.69                         | 0.50                        | Pass      |
|                 |         |             | 26      | 8        | 10/11.8 (MCS9)   | 2.14                         | 0.50                        | Pass      |

**Table 7-12. 6dB BW Measurements Antenna 1 (Common)**

| Frequency [MHz] | Channel | 802.11 MODE | RU Size | RU Index | Data Rate [Mbps]  | Measured 6dB Bandwidth [MHz] | Minimum 6dB Bandwidth [MHz] | Pass/Fail |
|-----------------|---------|-------------|---------|----------|-------------------|------------------------------|-----------------------------|-----------|
| 2412            | 1       | ax          | 242     | 61       | 97.5/114.7 (MCS9) | 19.15                        | 0.50                        | Pass      |
| 2437            | 6       | ax          | 242     | 61       | 97.5/114.7 (MCS9) | 19.15                        | 0.50                        | Pass      |
| 2462            | 11      | ax          | 242     | 61       | 97.5/114.7 (MCS9) | 19.15                        | 0.50                        | Pass      |

**Table 7-13. 6dB BW Measurements Antenna 1 (Common)**

|                                                   |                                                                                     |                                                                                                                                                                                                                  |                                                |                                          |
|---------------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------|------------------------------------------|
| <b>FCC ID:</b> BCGA3300<br><b>IC:</b> 579C-A3300  |  | <b>Test Dates:</b><br>3/24/2025 - 11/26/2025                                                                                                                                                                     | <b>EUT Type:</b><br>Smart Speaker with Display | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1C2503170028-05-R4.BCG |  | This report is Blockchain Verified. To verify the report authenticity, please visit <a href="https://www.blockchain-verified.com">https://www.blockchain-verified.com</a> or by clicking on the Blockchain logo. |                                                | Page 30 of 175                           |

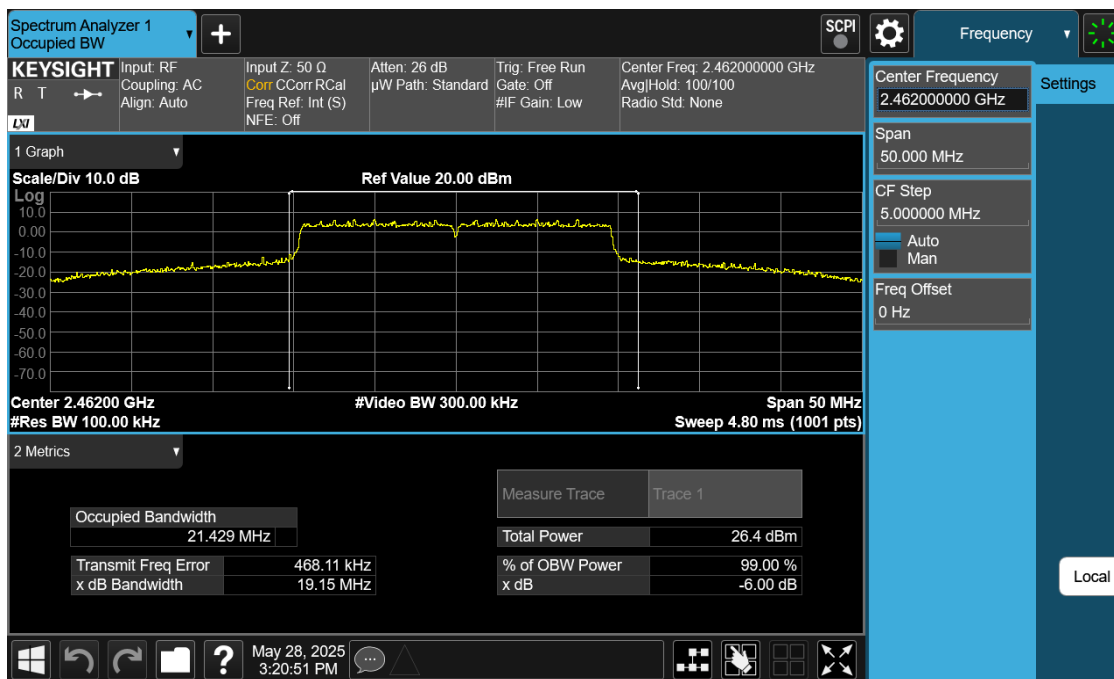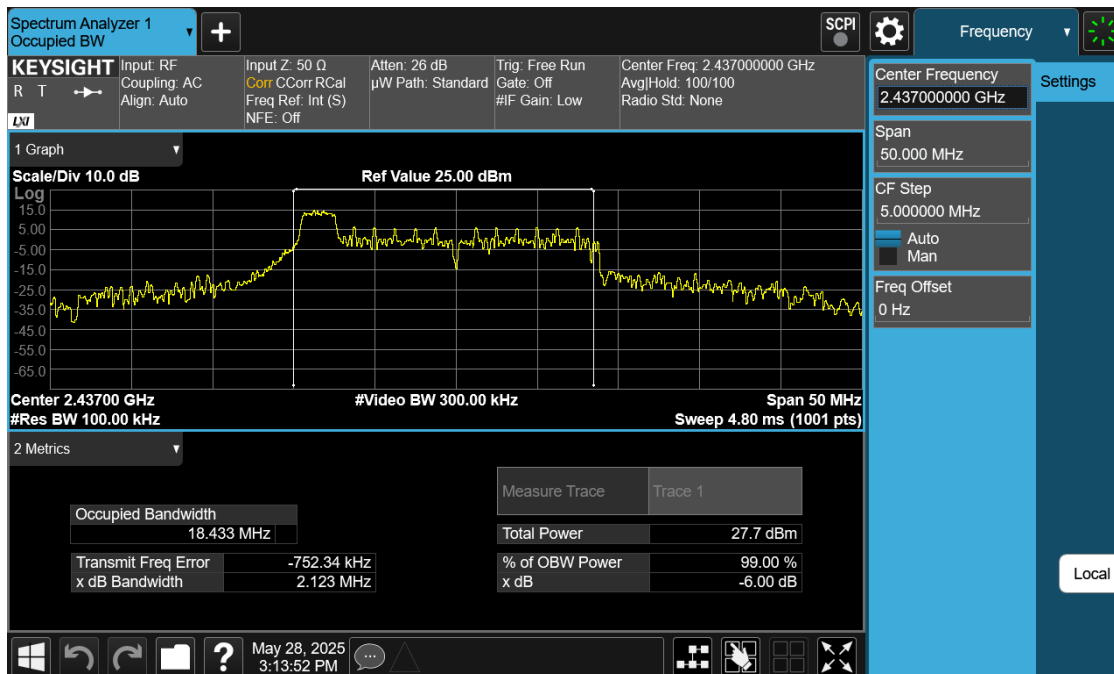

|                                            |                                                                                     |                                                                                                                                                                                                                  |                                         |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|-----------------------------------|
| FCC ID: BCGA3300<br>IC: 579C-A3300         |  | Test Dates:<br>3/24/2025 - 11/26/2025                                                                                                                                                                            | EUT Type:<br>Smart Speaker with Display | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2503170028-05-R4.BCG |  | This report is Blockchain Verified. To verify the report authenticity, please visit <a href="https://www.blockchain-verified.com">https://www.blockchain-verified.com</a> or by clicking on the Blockchain logo. |                                         | Page 31 of 175                    |

### 7.3.3 Antenna 0 (Dedicated) Bandwidth Measurements


| Frequency [MHz] | Channel | 802.11 MODE | RU Size | RU Index | Data Rate [Mbps] | Measured 6dB Bandwidth [MHz] | Minimum 6dB Bandwidth [MHz] | Pass/Fail |
|-----------------|---------|-------------|---------|----------|------------------|------------------------------|-----------------------------|-----------|
| 2412            | 1       | ax          | 26      | 0        | 10/11.8 (MCS9)   | 2.15                         | 0.50                        | Pass      |
|                 |         |             | 26      | 4        | 10/11.8 (MCS9)   | 2.69                         | 0.50                        | Pass      |
|                 |         |             | 26      | 8        | 10/11.8 (MCS9)   | 2.12                         | 0.50                        | Pass      |
| 2437            | 6       | ax          | 26      | 0        | 10/11.8 (MCS9)   | 2.10                         | 0.50                        | Pass      |
|                 |         |             | 26      | 4        | 10/11.8 (MCS9)   | 2.69                         | 0.50                        | Pass      |
|                 |         |             | 26      | 8        | 10/11.8 (MCS9)   | 2.18                         | 0.50                        | Pass      |
| 2462            | 11      | ax          | 26      | 0        | 10/11.8 (MCS9)   | 2.12                         | 0.50                        | Pass      |
|                 |         |             | 26      | 4        | 10/11.8 (MCS9)   | 2.68                         | 0.50                        | Pass      |
|                 |         |             | 26      | 8        | 10/11.8 (MCS9)   | 2.12                         | 0.50                        | Pass      |

**Table 7-14. 6dB BW Measurements Antenna 0 (Dedicated) – RU26**

| Frequency [MHz] | Channel | 802.11 MODE | RU Size | RU Index | Data Rate [Mbps]  | Measured 6dB Bandwidth [MHz] | Minimum 6dB Bandwidth [MHz] | Pass/Fail |
|-----------------|---------|-------------|---------|----------|-------------------|------------------------------|-----------------------------|-----------|
| 2412            | 1       | ax          | 242     | 61       | 97.5/114.7 (MCS9) | 19.15                        | 0.50                        | Pass      |
| 2437            | 6       | ax          | 242     | 61       | 97.5/114.7 (MCS9) | 19.14                        | 0.50                        | Pass      |
| 2462            | 11      | ax          | 242     | 61       | 97.5/114.7 (MCS9) | 19.17                        | 0.50                        | Pass      |

**Table 7-15. 6dB BW Measurements Antenna 0 (Dedicated) – RU242**

|                                                   |                                                                                     |                                                                                                                                                                                                                  |                                                |                                          |
|---------------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------|------------------------------------------|
| <b>FCC ID:</b> BCGA3300<br><b>IC:</b> 579C-A3300  |  | <b>Test Dates:</b><br>3/24/2025 - 11/26/2025                                                                                                                                                                     | <b>EUT Type:</b><br>Smart Speaker with Display | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1C2503170028-05-R4.BCG |  | This report is Blockchain Verified. To verify the report authenticity, please visit <a href="https://www.blockchain-verified.com">https://www.blockchain-verified.com</a> or by clicking on the Blockchain logo. |                                                | Page 32 of 175                           |

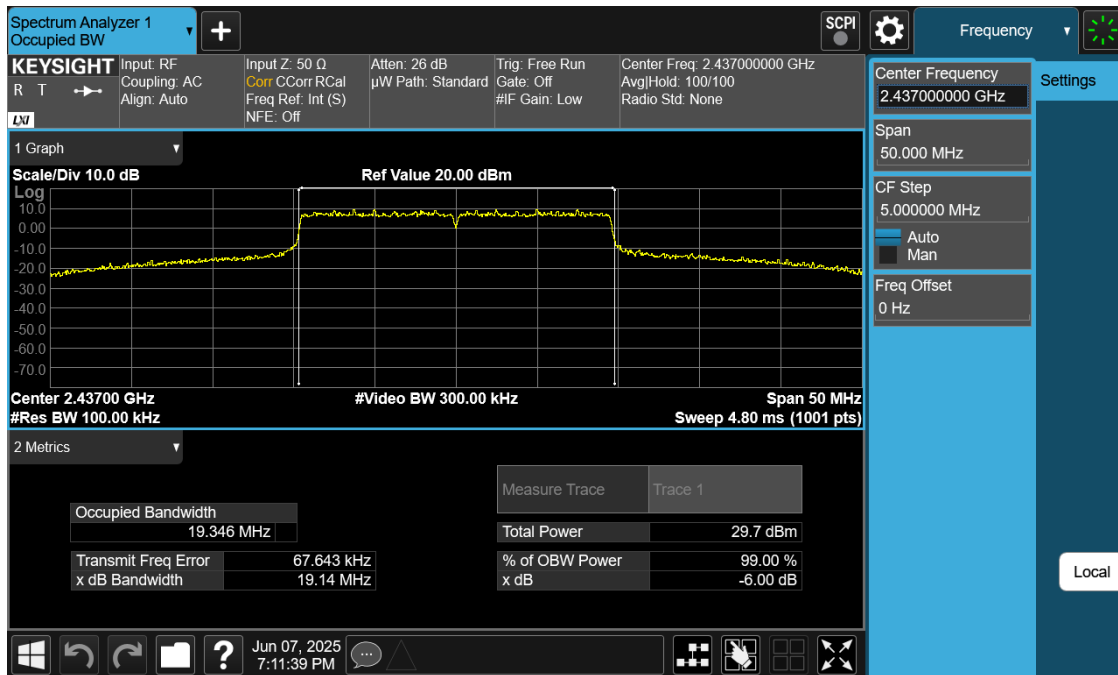

|                                            |                                                                                     |                                                                                                                                                                                                                  |                                         |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|-----------------------------------|
| FCC ID: BCGA3300<br>IC: 579C-A3300         |  | Test Dates:<br>3/24/2025 - 11/26/2025                                                                                                                                                                            | EUT Type:<br>Smart Speaker with Display | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2503170028-05-R4.BCG |  | This report is Blockchain Verified. To verify the report authenticity, please visit <a href="https://www.blockchain-verified.com">https://www.blockchain-verified.com</a> or by clicking on the Blockchain logo. |                                         | Page 33 of 175                    |

### 7.3.4 Antenna 1 (Dedicated) Bandwidth Measurements


| Frequency [MHz] | Channel | 802.11 MODE | RU Size | RU Index | Data Rate [Mbps] | Measured 6dB Bandwidth [MHz] | Minimum 6dB Bandwidth [MHz] | Pass/Fail |
|-----------------|---------|-------------|---------|----------|------------------|------------------------------|-----------------------------|-----------|
| 2412            | 1       | ax          | 26      | 0        | 10/11.8 (MCS9)   | 2.13                         | 0.50                        | Pass      |
|                 |         |             | 26      | 4        | 10/11.8 (MCS9)   | 2.66                         | 0.50                        | Pass      |
|                 |         |             | 26      | 8        | 10/11.8 (MCS9)   | 2.15                         | 0.50                        | Pass      |
| 2437            | 6       | ax          | 26      | 0        | 10/11.8 (MCS9)   | 2.15                         | 0.50                        | Pass      |
|                 |         |             | 26      | 4        | 10/11.8 (MCS9)   | 2.69                         | 0.50                        | Pass      |
|                 |         |             | 26      | 8        | 10/11.8 (MCS9)   | 2.16                         | 0.50                        | Pass      |
| 2462            | 11      | ax          | 26      | 0        | 10/11.8 (MCS9)   | 2.15                         | 0.50                        | Pass      |
|                 |         |             | 26      | 4        | 10/11.8 (MCS9)   | 2.63                         | 0.50                        | Pass      |
|                 |         |             | 26      | 8        | 10/11.8 (MCS9)   | 2.12                         | 0.50                        | Pass      |

**Table 7-16. 6dB BW Measurements Antenna 1 (Dedicated) – RU26**

| Frequency [MHz] | Channel | 802.11 MODE | RU Size | RU Index | Data Rate [Mbps]  | Measured 6dB Bandwidth [MHz] | Minimum 6dB Bandwidth [MHz] | Pass/Fail |
|-----------------|---------|-------------|---------|----------|-------------------|------------------------------|-----------------------------|-----------|
| 2412            | 1       | ax          | 242     | 61       | 97.5/114.7 (MCS9) | 19.15                        | 0.50                        | Pass      |
| 2437            | 6       | ax          | 242     | 61       | 97.5/114.7 (MCS9) | 19.17                        | 0.50                        | Pass      |
| 2462            | 11      | ax          | 242     | 61       | 97.5/114.7 (MCS9) | 19.16                        | 0.50                        | Pass      |

**Table 7-17. 6dB BW Measurements Antenna 1 (Dedicated) – RU242**

|                                                   |                                                                                     |                                                                                                                                                                                                                  |                                                |                                          |
|---------------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------|------------------------------------------|
| <b>FCC ID:</b> BCGA3300<br><b>IC:</b> 579C-A3300  |  | <b>Test Dates:</b><br>3/24/2025 - 11/26/2025                                                                                                                                                                     | <b>EUT Type:</b><br>Smart Speaker with Display | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1C2503170028-05-R4.BCG |  | This report is Blockchain Verified. To verify the report authenticity, please visit <a href="https://www.blockchain-verified.com">https://www.blockchain-verified.com</a> or by clicking on the Blockchain logo. |                                                | Page 34 of 175                           |

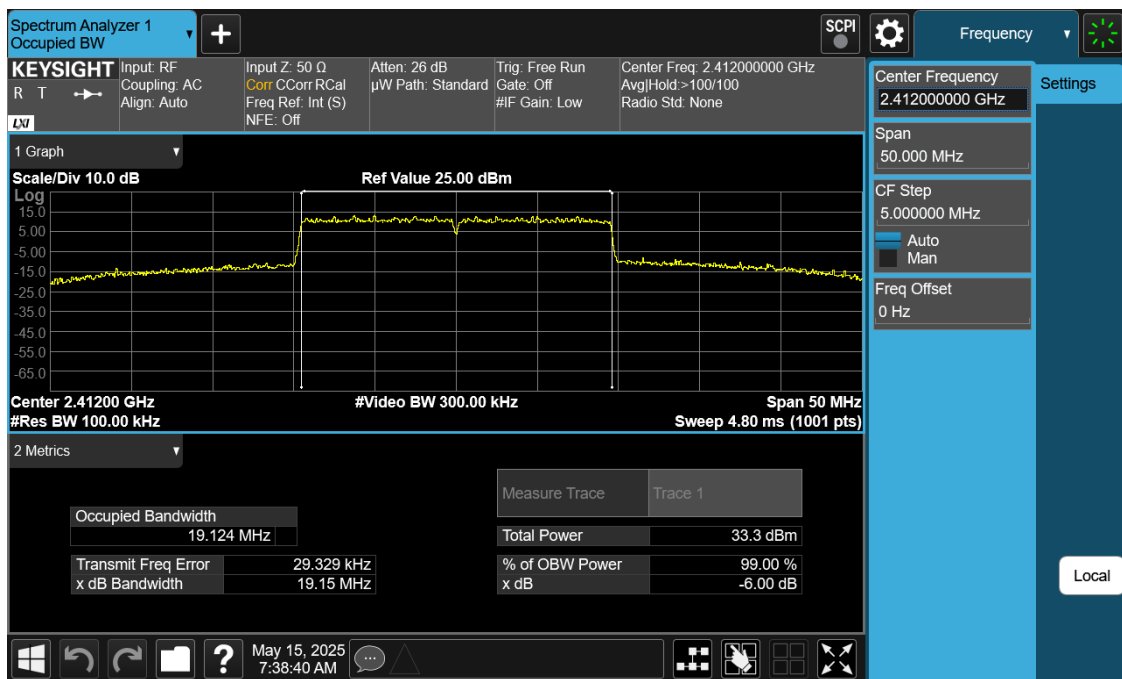

## 7.4 Output Power Measurement

### Test Overview and Limits

A transmitter antenna terminal of EUT is connected to the input of an RF power sensor. Measurement is made using a broadband power meter capable of making peak and average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

**The maximum peak conducted output power of digital modulation systems operating in the 2400-2483.5 MHz band is 1 Watt.**

**The conducted output power limit on paragraph above is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.**

**For DTSs employing digital modulation techniques operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W. The e.i.r.p. shall not exceed 4 W.**

### Test Procedure Used

ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 – Subclause 11.9.1.2 PKPM1 Peak Power Method  
KDB 558074 D01 v05r02 – Section 8.3.1.3 PKPM1 Peak-reading Power Meter Method  
ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 – Subclause 11.9.2.3.2 Method AVGPM-G  
KDB 558074 D01 v05r02 – Section 8.3.2.3 Measurement using a Power Meter (PM)  
ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 – Subclause 14.4 Measure-and-Sum Technique  
KDB 662911 D01 v02r01 – Section E)1) Measure-and-Sum Technique

### Test Settings

#### Method PKPM1 (Peak Power Measurement)

Peak power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The pulse sensor employs a VBW = 50MHz so this method was only used for signals whose DTS bandwidth was less than or equal to 50MHz.

#### Method AVGPM-G (Average Power Measurement)

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

### Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.



**Figure 7-3. Test Instrument & Measurement Setup for Power Meter Measurements**

### Test Notes

1. All RU's were investigated and only worst case partially-loaded and fully-loaded RU's are reported.
2. For 802.11ax-RU, the worst case data rate was found to be MCS9.

|                                            |                                                                                     |                                                                                                                                                                                                                  |                                         |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|-----------------------------------|
| FCC ID: BCGA3300<br>IC: 579C-A3300         |  | Test Dates:<br>3/24/2025 - 11/26/2025                                                                                                                                                                            | EUT Type:<br>Smart Speaker with Display | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2503170028-05-R4.BCG |  | This report is Blockchain Verified. To verify the report authenticity, please visit <a href="https://www.blockchain-verified.com">https://www.blockchain-verified.com</a> or by clicking on the Blockchain logo. |                                         | Page 36 of 175                    |

## 7.4.1 Average Output Power Measurement

| Freq [MHz] | Channel | RU Size | RU Index | Data Rate [Mbps] | Detector | Conducted Powers (dBm) | Conducted Power Limit [dBm] | Conducted Power Margin [dB] | Ant. Gain [dBi] | Max e.i.r.p. [dBm] | Max e.i.r.p. Limit [dBm] | e.i.r.p. Margin [dB] |
|------------|---------|---------|----------|------------------|----------|------------------------|-----------------------------|-----------------------------|-----------------|--------------------|--------------------------|----------------------|
| 2412       | 1       | 26      | 0        | 108/114.7 (MCS9) | AVG      | 7.63                   | 30.00                       | -22.37                      | 1.39            | 9.02               | 36.02                    | -27.00               |
| 2412       | 1       | 26      | 4        | 108/114.7 (MCS9) | AVG      | 7.54                   | 30.00                       | -22.46                      | 1.39            | 8.93               | 36.02                    | -27.09               |
| 2412       | 1       | 26      | 8        | 108/114.7 (MCS9) | AVG      | 7.97                   | 30.00                       | -22.03                      | 1.39            | 9.36               | 36.02                    | -26.66               |
| 2437       | 6       | 26      | 0        | 108/114.7 (MCS9) | AVG      | 7.66                   | 30.00                       | -22.34                      | 1.39            | 9.05               | 36.02                    | -26.97               |
| 2437       | 6       | 26      | 4        | 108/114.7 (MCS9) | AVG      | 7.67                   | 30.00                       | -22.34                      | 1.39            | 9.06               | 36.02                    | -26.97               |
| 2437       | 6       | 26      | 8        | 108/114.7 (MCS9) | AVG      | 7.73                   | 30.00                       | -22.27                      | 1.39            | 9.12               | 36.02                    | -26.90               |
| 2462       | 11      | 26      | 0        | 108/114.7 (MCS9) | AVG      | 7.97                   | 30.00                       | -22.03                      | 1.39            | 9.36               | 36.02                    | -26.66               |
| 2462       | 11      | 26      | 4        | 108/114.7 (MCS9) | AVG      | 7.96                   | 30.00                       | -22.04                      | 1.39            | 9.35               | 36.02                    | -26.67               |
| 2462       | 11      | 26      | 8        | 108/114.7 (MCS9) | AVG      | 7.51                   | 30.00                       | -22.49                      | 1.39            | 8.90               | 36.02                    | -27.12               |
| 2467       | 12      | 26      | 0        | 108/114.7 (MCS9) | AVG      | 7.42                   | 30.00                       | -22.58                      | 1.39            | 8.81               | 36.02                    | -27.21               |
| 2467       | 12      | 26      | 4        | 108/114.7 (MCS9) | AVG      | 7.43                   | 30.00                       | -22.57                      | 1.39            | 8.82               | 36.02                    | -27.20               |
| 2467       | 12      | 26      | 8        | 108/114.7 (MCS9) | AVG      | 7.12                   | 30.00                       | -22.88                      | 1.39            | 8.51               | 36.02                    | -27.51               |

**Table 7-18. Average Conducted Output Power Measurements Antenna 0 (Common) (RU26)**

| Freq [MHz] | Channel | RU Size | RU Index | Data Rate [Mbps] | Detector | Conducted Powers (dBm) | Conducted Power Limit [dBm] | Conducted Power Margin [dB] | Ant. Gain [dBi] | Max e.i.r.p. [dBm] | Max e.i.r.p. Limit [dBm] | e.i.r.p. Margin [dB] |
|------------|---------|---------|----------|------------------|----------|------------------------|-----------------------------|-----------------------------|-----------------|--------------------|--------------------------|----------------------|
| 2412       | 1       | 242     | 61       | 108/114.7 (MCS9) | AVG      | 8.92                   | 30.00                       | -21.08                      | 1.39            | 10.31              | 36.02                    | -25.71               |
| 2417       | 2       | 242     | 61       | 108/114.7 (MCS9) | AVG      | 9.44                   | 30.00                       | -20.56                      | 1.39            | 10.83              | 36.02                    | -25.19               |
| 2422       | 3       | 242     | 61       | 108/114.7 (MCS9) | AVG      | 11.86                  | 30.00                       | -18.14                      | 1.39            | 13.25              | 36.02                    | -22.77               |
| 2427       | 4       | 242     | 61       | 108/114.7 (MCS9) | AVG      | 12.37                  | 30.00                       | -17.64                      | 1.39            | 13.76              | 36.02                    | -22.27               |
| 2432       | 5       | 242     | 61       | 108/114.7 (MCS9) | AVG      | 12.88                  | 30.00                       | -17.12                      | 1.39            | 14.27              | 36.02                    | -21.75               |
| 2437       | 6       | 242     | 61       | 108/114.7 (MCS9) | AVG      | 13.36                  | 30.00                       | -16.64                      | 1.39            | 14.75              | 36.02                    | -21.27               |
| 2442       | 7       | 242     | 61       | 108/114.7 (MCS9) | AVG      | 12.90                  | 30.00                       | -17.10                      | 1.39            | 14.29              | 36.02                    | -21.73               |
| 2447       | 8       | 242     | 61       | 108/114.7 (MCS9) | AVG      | 11.72                  | 30.00                       | -18.29                      | 1.39            | 13.11              | 36.02                    | -22.92               |
| 2452       | 9       | 242     | 61       | 108/114.7 (MCS9) | AVG      | 11.26                  | 30.00                       | -18.75                      | 1.39            | 12.65              | 36.02                    | -23.38               |
| 2457       | 10      | 242     | 61       | 108/114.7 (MCS9) | AVG      | 10.29                  | 30.00                       | -19.71                      | 1.39            | 11.68              | 36.02                    | -24.34               |
| 2462       | 11      | 242     | 61       | 108/114.7 (MCS9) | AVG      | 8.87                   | 30.00                       | -21.13                      | 1.39            | 10.26              | 36.02                    | -25.76               |
| 2467       | 12      | 242     | 61       | 108/114.7 (MCS9) | AVG      | 7.45                   | 30.00                       | -22.55                      | 1.39            | 8.84               | 36.02                    | -27.18               |

**Table 7-19. Average Conducted Output Power Measurements Antenna 0 (Common) (RU242)**

| Freq [MHz] | Channel | RU Size | RU Index | Data Rate [Mbps] | Detector | Conducted Powers (dBm) | Conducted Power Limit [dBm] | Conducted Power Margin [dB] | Ant. Gain [dBi] | Max e.i.r.p. [dBm] | Max e.i.r.p. Limit [dBm] | e.i.r.p. Margin [dB] |
|------------|---------|---------|----------|------------------|----------|------------------------|-----------------------------|-----------------------------|-----------------|--------------------|--------------------------|----------------------|
| 2412       | 1       | 26      | 0        | 108/114.7 (MCS9) | AVG      | 7.48                   | 30.00                       | -22.52                      | 1.48            | 8.96               | 36.02                    | -27.06               |
| 2412       | 1       | 26      | 4        | 108/114.7 (MCS9) | AVG      | 7.85                   | 30.00                       | -22.15                      | 1.48            | 9.33               | 36.02                    | -26.69               |
| 2412       | 1       | 26      | 8        | 108/114.7 (MCS9) | AVG      | 7.78                   | 30.00                       | -22.22                      | 1.48            | 9.26               | 36.02                    | -26.76               |
| 2437       | 6       | 26      | 0        | 108/114.7 (MCS9) | AVG      | 7.91                   | 30.00                       | -22.09                      | 1.48            | 9.39               | 36.02                    | -26.63               |
| 2437       | 6       | 26      | 4        | 108/114.7 (MCS9) | AVG      | 7.90                   | 30.00                       | -22.10                      | 1.48            | 9.38               | 36.02                    | -26.64               |
| 2437       | 6       | 26      | 8        | 108/114.7 (MCS9) | AVG      | 7.92                   | 30.00                       | -22.08                      | 1.48            | 9.40               | 36.02                    | -26.62               |
| 2462       | 11      | 26      | 0        | 108/114.7 (MCS9) | AVG      | 7.91                   | 30.00                       | -22.09                      | 1.48            | 9.39               | 36.02                    | -26.63               |
| 2462       | 11      | 26      | 4        | 108/114.7 (MCS9) | AVG      | 7.83                   | 30.00                       | -22.17                      | 1.48            | 9.31               | 36.02                    | -26.71               |
| 2462       | 11      | 26      | 8        | 108/114.7 (MCS9) | AVG      | 7.92                   | 30.00                       | -22.08                      | 1.48            | 9.40               | 36.02                    | -26.62               |
| 2467       | 12      | 26      | 0        | 108/114.7 (MCS9) | AVG      | 7.34                   | 30.00                       | -22.66                      | 1.48            | 8.82               | 36.02                    | -27.20               |
| 2467       | 12      | 26      | 4        | 108/114.7 (MCS9) | AVG      | 7.37                   | 30.00                       | -22.64                      | 1.48            | 8.85               | 36.02                    | -27.18               |
| 2467       | 12      | 26      | 8        | 108/114.7 (MCS9) | AVG      | 7.40                   | 30.00                       | -22.60                      | 1.48            | 8.88               | 36.02                    | -27.14               |

**Table 7-20. Average Conducted Output Power Measurements Antenna 1 (Common) (RU26)**

| Freq [MHz] | Channel | RU Size | RU Index | Data Rate [Mbps] | Detector | Conducted Powers (dBm) | Conducted Power Limit [dBm] | Conducted Power Margin [dB] | Ant. Gain [dBi] | Max e.i.r.p. [dBm] | Max e.i.r.p. Limit [dBm] | e.i.r.p. Margin [dB] |
|------------|---------|---------|----------|------------------|----------|------------------------|-----------------------------|-----------------------------|-----------------|--------------------|--------------------------|----------------------|
| 2412       | 1       | 242     | 61       | 108/114.7 (MCS9) | AVG      | 8.71                   | 30.00                       | -21.29                      | 1.48            | 10.19              | 36.02                    | -25.83               |
| 2417       | 2       | 242     | 61       | 108/114.7 (MCS9) | AVG      | 9.25                   | 30.00                       | -20.75                      | 1.48            | 10.73              | 36.02                    | -25.29               |
| 2422       | 3       | 242     | 61       | 108/114.7 (MCS9) | AVG      | 11.67                  | 30.00                       | -18.33                      | 1.48            | 13.15              | 36.02                    | -22.87               |
| 2427       | 4       | 242     | 61       | 108/114.7 (MCS9) | AVG      | 12.21                  | 30.00                       | -17.80                      | 1.48            | 13.69              | 36.02                    | -22.34               |
| 2432       | 5       | 242     | 61       | 108/114.7 (MCS9) | AVG      | 12.66                  | 30.00                       | -17.34                      | 1.48            | 14.14              | 36.02                    | -21.88               |
| 2437       | 6       | 242     | 61       | 108/114.7 (MCS9) | AVG      | 13.16                  | 30.00                       | -16.84                      | 1.48            | 14.64              | 36.02                    | -21.38               |
| 2442       | 7       | 242     | 61       | 108/114.7 (MCS9) | AVG      | 12.74                  | 30.00                       | -17.26                      | 1.48            | 14.22              | 36.02                    | -21.80               |
| 2447       | 8       | 242     | 61       | 108/114.7 (MCS9) | AVG      | 11.67                  | 30.00                       | -18.33                      | 1.48            | 13.15              | 36.02                    | -22.87               |
| 2452       | 9       | 242     | 61       | 108/114.7 (MCS9) | AVG      | 11.21                  | 30.00                       | -18.79                      | 1.48            | 12.69              | 36.02                    | -23.33               |
| 2457       | 10      | 242     | 61       | 108/114.7 (MCS9) | AVG      | 10.23                  | 30.00                       | -19.77                      | 1.48            | 11.71              | 36.02                    | -24.31               |
| 2462       | 11      | 242     | 61       | 108/114.7 (MCS9) | AVG      | 8.82                   | 30.00                       | -21.18                      | 1.48            | 10.30              | 36.02                    | -25.72               |
| 2467       | 12      | 242     | 61       | 108/114.7 (MCS9) | AVG      | 7.30                   | 30.00                       | -22.71                      | 1.48            | 8.78               | 36.02                    | -27.25               |

**Table 7-21. Average Conducted Output Power Measurements Antenna 1 (Common) (RU242)**

|                                            |                                                                                     |                                                                                                                                                                                                                  |                                         |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|-----------------------------------|
| FCC ID: BCGA3300<br>IC: 579C-A3300         |  | Test Dates:<br>3/24/2025 - 11/26/2025                                                                                                                                                                            | EUT Type:<br>Smart Speaker with Display | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2503170028-05-R4.BCG |  | This report is Blockchain Verified. To verify the report authenticity, please visit <a href="https://www.blockchain-verified.com">https://www.blockchain-verified.com</a> or by clicking on the Blockchain logo. |                                         | Page 37 of 175                    |

| Freq [MHz] | Channel | RU Size | RU Index | Data Rate [Mbps] | Detector | Conducted Powers (dBm) | Conducted Power Limit [dBm] | Conducted Power Margin [dB] | Ant. Gain [dBi] | Max e.i.r.p. [dBm] | Max e.i.r.p. Limit [dBm] | e.i.r.p. Margin [dB] |
|------------|---------|---------|----------|------------------|----------|------------------------|-----------------------------|-----------------------------|-----------------|--------------------|--------------------------|----------------------|
| 2412       | 1       | 26      | 0        | 108/114.7 (MCS9) | AVG      | 9.67                   | 30.00                       | -20.33                      | 1.39            | 11.06              | 36.02                    | -24.96               |
| 2412       | 1       | 26      | 4        | 108/114.7 (MCS9) | AVG      | 9.64                   | 30.00                       | -20.37                      | 1.39            | 11.03              | 36.02                    | -25.00               |
| 2412       | 1       | 26      | 8        | 108/114.7 (MCS9) | AVG      | 9.60                   | 30.00                       | -20.40                      | 1.39            | 10.99              | 36.02                    | -25.03               |
| 2437       | 6       | 26      | 0        | 108/114.7 (MCS9) | AVG      | 9.79                   | 30.00                       | -20.21                      | 1.39            | 11.18              | 36.02                    | -24.84               |
| 2437       | 6       | 26      | 4        | 108/114.7 (MCS9) | AVG      | 9.73                   | 30.00                       | -20.27                      | 1.39            | 11.12              | 36.02                    | -24.90               |
| 2437       | 6       | 26      | 8        | 108/114.7 (MCS9) | AVG      | 9.79                   | 30.00                       | -20.22                      | 1.39            | 11.18              | 36.02                    | -24.85               |
| 2462       | 11      | 26      | 0        | 108/114.7 (MCS9) | AVG      | 9.61                   | 30.00                       | -20.39                      | 1.39            | 11.00              | 36.02                    | -25.02               |
| 2462       | 11      | 26      | 4        | 108/114.7 (MCS9) | AVG      | 9.57                   | 30.00                       | -20.43                      | 1.39            | 10.96              | 36.02                    | -25.06               |
| 2462       | 11      | 26      | 8        | 108/114.7 (MCS9) | AVG      | 9.64                   | 30.00                       | -20.36                      | 1.39            | 11.03              | 36.02                    | -24.99               |
| 2467       | 12      | 26      | 0        | 108/114.7 (MCS9) | AVG      | 9.12                   | 30.00                       | -20.88                      | 1.39            | 10.51              | 36.02                    | -25.51               |
| 2467       | 12      | 26      | 4        | 108/114.7 (MCS9) | AVG      | 9.15                   | 30.00                       | -20.85                      | 1.39            | 10.54              | 36.02                    | -25.48               |
| 2467       | 12      | 26      | 8        | 108/114.7 (MCS9) | AVG      | 9.17                   | 30.00                       | -20.83                      | 1.39            | 10.56              | 36.02                    | -25.46               |

**Table 7-22. Average Conducted Output Power Measurements Antenna 0 (Dedicated) (RU26)**

| Freq [MHz] | Channel | RU Size | RU Index | Data Rate [Mbps] | Detector | Conducted Powers (dBm) | Conducted Power Limit [dBm] | Conducted Power Margin [dB] | Ant. Gain [dBi] | Max e.i.r.p. [dBm] | Max e.i.r.p. Limit [dBm] | e.i.r.p. Margin [dB] |
|------------|---------|---------|----------|------------------|----------|------------------------|-----------------------------|-----------------------------|-----------------|--------------------|--------------------------|----------------------|
| 2412       | 1       | 242     | 61       | 108/114.7 (MCS9) | AVG      | 12.43                  | 30.00                       | -17.58                      | 1.39            | 13.82              | 36.02                    | -22.21               |
| 2417       | 2       | 242     | 61       | 108/114.7 (MCS9) | AVG      | 13.40                  | 30.00                       | -16.60                      | 1.39            | 14.79              | 36.02                    | -21.23               |
| 2422       | 3       | 242     | 61       | 108/114.7 (MCS9) | AVG      | 14.88                  | 30.00                       | -15.12                      | 1.39            | 16.27              | 36.02                    | -19.75               |
| 2427       | 4       | 242     | 61       | 108/114.7 (MCS9) | AVG      | 15.88                  | 30.00                       | -14.13                      | 1.39            | 17.27              | 36.02                    | -18.76               |
| 2437       | 6       | 242     | 61       | 108/114.7 (MCS9) | AVG      | 15.44                  | 30.00                       | -14.57                      | 1.39            | 16.83              | 36.02                    | -19.20               |
| 2442       | 7       | 242     | 61       | 108/114.7 (MCS9) | AVG      | 14.00                  | 30.00                       | -16.00                      | 1.39            | 15.39              | 36.02                    | -20.63               |
| 2447       | 8       | 242     | 61       | 108/114.7 (MCS9) | AVG      | 14.22                  | 30.00                       | -15.78                      | 1.39            | 15.61              | 36.02                    | -20.41               |
| 2452       | 9       | 242     | 61       | 108/114.7 (MCS9) | AVG      | 12.84                  | 30.00                       | -17.16                      | 1.39            | 14.23              | 36.02                    | -21.79               |
| 2457       | 10      | 242     | 61       | 108/114.7 (MCS9) | AVG      | 11.91                  | 30.00                       | -18.09                      | 1.39            | 13.30              | 36.02                    | -22.72               |
| 2462       | 11      | 242     | 61       | 108/114.7 (MCS9) | AVG      | 10.98                  | 30.00                       | -19.02                      | 1.39            | 12.37              | 36.02                    | -23.65               |
| 2467       | 12      | 242     | 61       | 108/114.7 (MCS9) | AVG      | 9.09                   | 30.00                       | -20.92                      | 1.39            | 10.48              | 36.02                    | -25.55               |

**Table 7-23. Average Conducted Output Power Measurements Antenna 0 (Dedicated) (RU242)**

| Freq [MHz] | Channel | RU Size | RU Index | Data Rate [Mbps] | Detector | Conducted Powers (dBm) | Conducted Power Limit [dBm] | Conducted Power Margin [dB] | Ant. Gain [dBi] | Max e.i.r.p. [dBm] | Max e.i.r.p. Limit [dBm] | e.i.r.p. Margin [dB] |
|------------|---------|---------|----------|------------------|----------|------------------------|-----------------------------|-----------------------------|-----------------|--------------------|--------------------------|----------------------|
| 2412       | 1       | 26      | 0        | 108/114.7 (MCS9) | AVG      | 9.89                   | 30.00                       | -20.11                      | 1.48            | 11.37              | 36.02                    | -24.65               |
| 2412       | 1       | 26      | 4        | 108/114.7 (MCS9) | AVG      | 9.95                   | 30.00                       | -20.05                      | 1.48            | 11.43              | 36.02                    | -24.59               |
| 2412       | 1       | 26      | 8        | 108/114.7 (MCS9) | AVG      | 9.93                   | 30.00                       | -20.07                      | 1.48            | 11.41              | 36.02                    | -24.61               |
| 2437       | 6       | 26      | 0        | 108/114.7 (MCS9) | AVG      | 9.52                   | 30.00                       | -20.48                      | 1.48            | 11.00              | 36.02                    | -25.02               |
| 2437       | 6       | 26      | 4        | 108/114.7 (MCS9) | AVG      | 9.98                   | 30.00                       | -20.02                      | 1.48            | 11.46              | 36.02                    | -24.56               |
| 2437       | 6       | 26      | 8        | 108/114.7 (MCS9) | AVG      | 9.64                   | 30.00                       | -20.36                      | 1.48            | 11.12              | 36.02                    | -24.90               |
| 2462       | 11      | 26      | 0        | 108/114.7 (MCS9) | AVG      | 9.82                   | 30.00                       | -20.18                      | 1.48            | 11.30              | 36.02                    | -24.72               |
| 2462       | 11      | 26      | 4        | 108/114.7 (MCS9) | AVG      | 9.81                   | 30.00                       | -20.19                      | 1.48            | 11.29              | 36.02                    | -24.73               |
| 2462       | 11      | 26      | 8        | 108/114.7 (MCS9) | AVG      | 9.96                   | 30.00                       | -20.04                      | 1.48            | 11.44              | 36.02                    | -24.58               |
| 2467       | 12      | 26      | 0        | 108/114.7 (MCS9) | AVG      | 9.28                   | 30.00                       | -20.72                      | 1.48            | 10.76              | 36.02                    | -25.26               |
| 2467       | 12      | 26      | 4        | 108/114.7 (MCS9) | AVG      | 9.27                   | 30.00                       | -20.73                      | 1.48            | 10.75              | 36.02                    | -25.27               |
| 2467       | 12      | 26      | 8        | 108/114.7 (MCS9) | AVG      | 9.02                   | 30.00                       | -20.98                      | 1.48            | 10.50              | 36.02                    | -25.52               |

**Table 7-24. Average Conducted Output Power Measurements Antenna 1 (Dedicated) (RU26)**

| Freq [MHz] | Channel | RU Size | RU Index | Data Rate [Mbps] | Detector | Conducted Powers (dBm) | Conducted Power Limit [dBm] | Conducted Power Margin [dB] | Ant. Gain [dBi] | Max e.i.r.p. [dBm] | Max e.i.r.p. Limit [dBm] | e.i.r.p. Margin [dB] |
|------------|---------|---------|----------|------------------|----------|------------------------|-----------------------------|-----------------------------|-----------------|--------------------|--------------------------|----------------------|
| 2412       | 1       | 242     | 61       | 108/114.7 (MCS9) | AVG      | 12.43                  | 30.00                       | -17.57                      | 1.48            | 13.91              | 36.02                    | -22.11               |
| 2417       | 2       | 242     | 61       | 108/114.7 (MCS9) | AVG      | 13.44                  | 30.00                       | -16.56                      | 1.48            | 14.92              | 36.02                    | -21.10               |
| 2422       | 3       | 242     | 61       | 108/114.7 (MCS9) | AVG      | 14.92                  | 30.00                       | -15.08                      | 1.48            | 16.40              | 36.02                    | -19.62               |
| 2427       | 4       | 242     | 61       | 108/114.7 (MCS9) | AVG      | 15.95                  | 30.00                       | -14.06                      | 1.48            | 17.43              | 36.02                    | -18.60               |
| 2437       | 6       | 242     | 61       | 108/114.7 (MCS9) | AVG      | 14.97                  | 30.00                       | -15.03                      | 1.48            | 16.45              | 36.02                    | -19.57               |
| 2442       | 7       | 242     | 61       | 108/114.7 (MCS9) | AVG      | 14.04                  | 30.00                       | -15.96                      | 1.48            | 15.52              | 36.02                    | -20.50               |
| 2447       | 8       | 242     | 61       | 108/114.7 (MCS9) | AVG      | 14.26                  | 30.00                       | -15.74                      | 1.48            | 15.74              | 36.02                    | -20.28               |
| 2452       | 9       | 242     | 61       | 108/114.7 (MCS9) | AVG      | 12.80                  | 30.00                       | -17.20                      | 1.48            | 14.28              | 36.02                    | -21.74               |
| 2457       | 10      | 242     | 61       | 108/114.7 (MCS9) | AVG      | 11.87                  | 30.00                       | -18.13                      | 1.48            | 13.35              | 36.02                    | -22.67               |
| 2462       | 11      | 242     | 61       | 108/114.7 (MCS9) | AVG      | 10.85                  | 30.00                       | -19.15                      | 1.48            | 12.33              | 36.02                    | -23.69               |
| 2467       | 12      | 242     | 61       | 108/114.7 (MCS9) | AVG      | 9.34                   | 30.00                       | -20.66                      | 1.48            | 10.82              | 36.02                    | -25.20               |

**Table 7-25. Average Conducted Output Power Measurements Antenna 1 (Dedicated) (RU242)**

|                                            |                                                                                     |                                                                                                                                                                                                                  |                                         |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|-----------------------------------|
| FCC ID: BCGA3300<br>IC: 579C-A3300         |  | Test Dates:<br>3/24/2025 - 11/26/2025                                                                                                                                                                            | EUT Type:<br>Smart Speaker with Display | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2503170028-05-R4.BCG |  | This report is Blockchain Verified. To verify the report authenticity, please visit <a href="https://www.blockchain-verified.com">https://www.blockchain-verified.com</a> or by clicking on the Blockchain logo. |                                         | Page 38 of 175                    |

| Freq [MHz] | Channel | RU Size | RU Index | Data Rate [Mbps] | Detector | Conducted Power [dBm] |                    |        | Conducted Power Limit [dBm] | Conducted Power Margin [dB] | Directional Ant. Gain [dBi] | Max e.i.r.p. [dBm] | Max e.i.r.p. Limit [dBm] | e.i.r.p. Margin [dB] |
|------------|---------|---------|----------|------------------|----------|-----------------------|--------------------|--------|-----------------------------|-----------------------------|-----------------------------|--------------------|--------------------------|----------------------|
|            |         |         |          |                  |          | Antenna 0 (Common)    | Antenna 1 (Common) | Summed |                             |                             |                             |                    |                          |                      |
| 2412       | 1       | 26      | 0        | 216/229.4 (MCS9) | AVG      | 6.55                  | 6.89               | 9.74   | 30.00                       | -20.26                      | 4.45                        | 14.18              | 36.02                    | -21.84               |
| 2412       | 1       | 26      | 4        | 216/229.4 (MCS9) | AVG      | 6.92                  | 6.76               | 9.85   | 30.00                       | -20.15                      | 4.45                        | 14.29              | 36.02                    | -21.73               |
| 2412       | 1       | 26      | 8        | 216/229.4 (MCS9) | AVG      | 6.93                  | 6.65               | 9.80   | 30.00                       | -20.20                      | 4.45                        | 14.25              | 36.02                    | -21.77               |
| 2437       | 6       | 26      | 0        | 216/229.4 (MCS9) | AVG      | 6.65                  | 6.85               | 9.76   | 30.00                       | -20.24                      | 4.45                        | 14.20              | 36.02                    | -21.82               |
| 2437       | 6       | 26      | 4        | 216/229.4 (MCS9) | AVG      | 6.64                  | 6.75               | 9.70   | 30.00                       | -20.30                      | 4.45                        | 14.15              | 36.02                    | -21.87               |
| 2437       | 6       | 26      | 8        | 216/229.4 (MCS9) | AVG      | 6.70                  | 6.80               | 9.76   | 30.00                       | -20.24                      | 4.45                        | 14.20              | 36.02                    | -21.82               |
| 2462       | 11      | 26      | 0        | 216/229.4 (MCS9) | AVG      | 6.95                  | 6.79               | 9.88   | 30.00                       | -20.12                      | 4.45                        | 14.32              | 36.02                    | -21.70               |
| 2462       | 11      | 26      | 4        | 216/229.4 (MCS9) | AVG      | 6.89                  | 6.77               | 9.84   | 30.00                       | -20.16                      | 4.45                        | 14.29              | 36.02                    | -21.74               |
| 2462       | 11      | 26      | 8        | 216/229.4 (MCS9) | AVG      | 6.94                  | 6.82               | 9.89   | 30.00                       | -20.11                      | 4.45                        | 14.33              | 36.02                    | -21.69               |
| 2467       | 12      | 26      | 0        | 216/229.4 (MCS9) | AVG      | 6.85                  | 6.78               | 9.82   | 30.00                       | -20.18                      | 4.45                        | 14.27              | 36.02                    | -21.75               |
| 2467       | 12      | 26      | 4        | 216/229.4 (MCS9) | AVG      | 6.83                  | 6.75               | 9.80   | 30.00                       | -20.20                      | 4.45                        | 14.24              | 36.02                    | -21.78               |
| 2467       | 12      | 26      | 8        | 216/229.4 (MCS9) | AVG      | 6.97                  | 6.75               | 9.87   | 30.00                       | -20.13                      | 4.45                        | 14.32              | 36.02                    | -21.70               |

**Table 7-26. Average Conducted Output Power Measurements CDD Common (RU26)**

| Freq [MHz] | Channel | RU Size | RU Index | Data Rate [Mbps] | Detector | Conducted Power [dBm] |                    |        | Conducted Power Limit [dBm] | Conducted Power Margin [dB] | Directional Ant. Gain [dBi] | Max e.i.r.p. [dBm] | Max e.i.r.p. Limit [dBm] | e.i.r.p. Margin [dB] |
|------------|---------|---------|----------|------------------|----------|-----------------------|--------------------|--------|-----------------------------|-----------------------------|-----------------------------|--------------------|--------------------------|----------------------|
|            |         |         |          |                  |          | Antenna 0 (Common)    | Antenna 1 (Common) | Summed |                             |                             |                             |                    |                          |                      |
| 2412       | 1       | 242     | 61       | 216/229.4 (MCS9) | AVG      | 8.46                  | 8.31               | 11.40  | 30.00                       | -18.60                      | 4.45                        | 15.84              | 36.02                    | -20.18               |
| 2417       | 2       | 242     | 61       | 216/229.4 (MCS9) | AVG      | 8.96                  | 8.78               | 11.88  | 30.00                       | -18.12                      | 4.45                        | 16.33              | 36.02                    | -19.69               |
| 2422       | 3       | 242     | 61       | 216/229.4 (MCS9) | AVG      | 11.47                 | 11.29              | 14.39  | 30.00                       | -15.61                      | 4.45                        | 18.83              | 36.02                    | -17.19               |
| 2427       | 4       | 242     | 61       | 216/229.4 (MCS9) | AVG      | 11.92                 | 11.76              | 14.85  | 30.00                       | -15.15                      | 4.45                        | 19.30              | 36.02                    | -16.73               |
| 2432       | 5       | 242     | 61       | 216/229.4 (MCS9) | AVG      | 12.48                 | 12.26              | 15.38  | 30.00                       | -14.62                      | 4.45                        | 19.82              | 36.02                    | -16.20               |
| 2437       | 6       | 242     | 61       | 216/229.4 (MCS9) | AVG      | 12.93                 | 12.77              | 15.86  | 30.00                       | -14.14                      | 4.45                        | 20.31              | 36.02                    | -15.72               |
| 2442       | 7       | 242     | 61       | 216/229.4 (MCS9) | AVG      | 11.62                 | 12.28              | 14.97  | 30.00                       | -15.03                      | 4.45                        | 19.42              | 36.02                    | -16.60               |
| 2447       | 8       | 242     | 61       | 216/229.4 (MCS9) | AVG      | 11.29                 | 11.32              | 14.32  | 30.00                       | -15.68                      | 4.45                        | 18.76              | 36.02                    | -17.26               |
| 2452       | 9       | 242     | 61       | 216/229.4 (MCS9) | AVG      | 10.81                 | 10.79              | 13.81  | 30.00                       | -16.19                      | 4.45                        | 18.25              | 36.02                    | -17.77               |
| 2457       | 10      | 242     | 61       | 216/229.4 (MCS9) | AVG      | 9.35                  | 9.34               | 12.36  | 30.00                       | -17.64                      | 4.45                        | 16.80              | 36.02                    | -19.22               |
| 2462       | 11      | 242     | 61       | 216/229.4 (MCS9) | AVG      | 8.39                  | 8.34               | 11.38  | 30.00                       | -18.62                      | 4.45                        | 15.82              | 36.02                    | -20.20               |
| 2467       | 12      | 242     | 61       | 216/229.4 (MCS9) | AVG      | 6.91                  | 6.73               | 9.83   | 30.00                       | -20.17                      | 4.45                        | 14.28              | 36.02                    | -21.74               |

**Table 7-27. Average Conducted Output Power Measurements CDD Common (RU242)**

| Freq [MHz] | Channel | RU Size | RU Index | Data Rate [Mbps] | Detector | Conducted Power [dBm] |                       |        | Conducted Power Limit [dBm] | Conducted Power Margin [dB] | Directional Ant. Gain [dBi] | Max e.i.r.p. [dBm] | Max e.i.r.p. Limit [dBm] | e.i.r.p. Margin [dB] |
|------------|---------|---------|----------|------------------|----------|-----------------------|-----------------------|--------|-----------------------------|-----------------------------|-----------------------------|--------------------|--------------------------|----------------------|
|            |         |         |          |                  |          | Antenna 0 (Dedicated) | Antenna 1 (Dedicated) | Summed |                             |                             |                             |                    |                          |                      |
| 2412       | 1       | 26      | 0        | 216/229.4 (MCS9) | AVG      | 8.61                  | 8.93                  | 11.78  | 30.00                       | -18.22                      | 4.45                        | 16.23              | 36.02                    | -19.79               |
| 2412       | 1       | 26      | 4        | 216/229.4 (MCS9) | AVG      | 8.62                  | 8.94                  | 11.79  | 30.00                       | -18.21                      | 4.45                        | 16.23              | 36.02                    | -19.79               |
| 2412       | 1       | 26      | 8        | 216/229.4 (MCS9) | AVG      | 8.54                  | 8.86                  | 11.72  | 30.00                       | -18.28                      | 4.45                        | 16.16              | 36.02                    | -19.86               |
| 2437       | 6       | 26      | 0        | 216/229.4 (MCS9) | AVG      | 8.73                  | 8.98                  | 11.87  | 30.00                       | -18.13                      | 4.45                        | 16.31              | 36.02                    | -19.71               |
| 2437       | 6       | 26      | 4        | 216/229.4 (MCS9) | AVG      | 8.70                  | 8.97                  | 11.85  | 30.00                       | -18.15                      | 4.45                        | 16.30              | 36.02                    | -19.72               |
| 2437       | 6       | 26      | 8        | 216/229.4 (MCS9) | AVG      | 8.71                  | 8.57                  | 11.65  | 30.00                       | -18.35                      | 4.45                        | 16.10              | 36.02                    | -19.92               |
| 2462       | 11      | 26      | 0        | 216/229.4 (MCS9) | AVG      | 8.95                  | 8.82                  | 11.90  | 30.00                       | -18.10                      | 4.45                        | 16.34              | 36.02                    | -19.68               |
| 2462       | 11      | 26      | 4        | 216/229.4 (MCS9) | AVG      | 8.95                  | 8.76                  | 11.86  | 30.00                       | -18.14                      | 4.45                        | 16.31              | 36.02                    | -19.71               |
| 2462       | 11      | 26      | 8        | 216/229.4 (MCS9) | AVG      | 8.58                  | 8.92                  | 11.76  | 30.00                       | -18.24                      | 4.45                        | 16.20              | 36.02                    | -19.82               |
| 2467       | 12      | 26      | 0        | 216/229.4 (MCS9) | AVG      | 8.94                  | 8.78                  | 11.87  | 30.00                       | -18.13                      | 4.45                        | 16.31              | 36.02                    | -19.71               |
| 2467       | 12      | 26      | 4        | 216/229.4 (MCS9) | AVG      | 8.95                  | 8.72                  | 11.84  | 30.00                       | -18.16                      | 4.45                        | 16.29              | 36.02                    | -19.73               |
| 2467       | 12      | 26      | 8        | 216/229.4 (MCS9) | AVG      | 8.94                  | 8.98                  | 11.97  | 30.00                       | -18.03                      | 4.45                        | 16.42              | 36.02                    | -19.61               |

**Table 7-28. Average Conducted Output Power Measurements CDD Dedicated (RU26)**

| Freq [MHz] | Channel | RU Size | RU Index | Data Rate [Mbps] | Detector | Conducted Power [dBm] |                       |        | Conducted Power Limit [dBm] | Conducted Power Margin [dB] | Directional Ant. Gain [dBi] | Max e.i.r.p. [dBm] | Max e.i.r.p. Limit [dBm] | e.i.r.p. Margin [dB] |
|------------|---------|---------|----------|------------------|----------|-----------------------|-----------------------|--------|-----------------------------|-----------------------------|-----------------------------|--------------------|--------------------------|----------------------|
|            |         |         |          |                  |          | Antenna 0 (Dedicated) | Antenna 1 (Dedicated) | Summed |                             |                             |                             |                    |                          |                      |
| 2412       | 1       | 242     | 61       | 216/229.4 (MCS9) | AVG      | 11.43                 | 11.46                 | 14.45  | 30.00                       | -15.55                      | 4.45                        | 18.90              | 36.02                    | -17.12               |
| 2417       | 2       | 242     | 61       | 216/229.4 (MCS9) | AVG      | 12.47                 | 12.48                 | 15.49  | 30.00                       | -14.51                      | 4.45                        | 19.93              | 36.02                    | -16.09               |
| 2422       | 3       | 242     | 61       | 216/229.4 (MCS9) | AVG      | 14.46                 | 14.04                 | 17.26  | 30.00                       | -12.74                      | 4.45                        | 21.71              | 36.02                    | -14.31               |
| 2427       | 4       | 242     | 61       | 216/229.4 (MCS9) | AVG      | 15.48                 | 15.02                 | 18.26  | 30.00                       | -11.74                      | 4.45                        | 22.71              | 36.02                    | -13.31               |
| 2432       | 5       | 242     | 61       | 216/229.4 (MCS9) | AVG      | 15.92                 | 15.55                 | 18.75  | 30.00                       | -11.25                      | 4.45                        | 23.20              | 36.02                    | -12.82               |
| 2437       | 6       | 242     | 61       | 216/229.4 (MCS9) | AVG      | 14.98                 | 14.58                 | 17.79  | 30.00                       | -12.21                      | 4.45                        | 22.24              | 36.02                    | -13.78               |
| 2442       | 7       | 242     | 61       | 216/229.4 (MCS9) | AVG      | 14.03                 | 14.10                 | 17.07  | 30.00                       | -12.93                      | 4.45                        | 21.52              | 36.02                    | -14.50               |
| 2447       | 8       | 242     | 61       | 216/229.4 (MCS9) | AVG      | 13.77                 | 13.81                 | 16.80  | 30.00                       | -13.20                      | 4.45                        | 21.25              | 36.02                    | -14.77               |
| 2452       | 9       | 242     | 61       | 216/229.4 (MCS9) | AVG      | 12.83                 | 12.85                 | 15.85  | 30.00                       | -14.15                      | 4.45                        | 20.29              | 36.02                    | -15.73               |
| 2457       | 10      | 242     | 61       | 216/229.4 (MCS9) | AVG      | 11.87                 | 11.84                 | 14.86  | 30.00                       | -15.14                      | 4.45                        | 19.31              | 36.02                    | -16.71               |
| 2462       | 11      | 242     | 61       | 216/229.4 (MCS9) | AVG      | 10.90                 | 10.81                 | 13.86  | 30.00                       | -16.14                      | 4.45                        | 18.31              | 36.02                    | -17.71               |
| 2467       | 12      | 242     | 61       | 216/229.4 (MCS9) | AVG      | 8.53                  | 8.77                  | 11.66  | 30.00                       | -18.34                      | 4.45                        | 16.11              | 36.02                    | -19.91               |

**Table 7-29. Average Conducted Output Power Measurements CDD Dedicated (RU242)**

|                                                   |                                                                                     |                                                                                                                                                                                                                  |                                                |                                          |
|---------------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------|------------------------------------------|
| <b>FCC ID:</b> BCGA3300<br><b>IC:</b> 579C-A3300  |  | <b>Test Dates:</b><br>3/24/2025 - 11/26/2025                                                                                                                                                                     | <b>EUT Type:</b><br>Smart Speaker with Display | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1C2503170028-05-R4.BCG |  | This report is Blockchain Verified. To verify the report authenticity, please visit <a href="https://www.blockchain-verified.com">https://www.blockchain-verified.com</a> or by clicking on the Blockchain logo. |                                                | Page 39 of 175                           |

## 7.4.2 Peak Output Power Measurement

| Freq [MHz] | Channel | RU Size | RU Index | Data Rate [Mbps] | Detector | Conducted Powers (dBm) | Conducted Power Limit [dBm] | Conducted Power Margin [dB] | Ant. Gain [dBi] | Max e.i.r.p. [dBm] | Max e.i.r.p. Limit [dBm] | e.i.r.p. Margin [dB] |
|------------|---------|---------|----------|------------------|----------|------------------------|-----------------------------|-----------------------------|-----------------|--------------------|--------------------------|----------------------|
| 2412       | 1       | 26      | 0        | 108/114.7 (MCS9) | PEAK     | 17.63                  | 30.00                       | -12.38                      | 1.39            | 19.02              | 36.02                    | -17.01               |
| 2412       | 1       | 26      | 4        | 108/114.7 (MCS9) | PEAK     | 17.64                  | 30.00                       | -12.36                      | 1.39            | 19.03              | 36.02                    | -16.99               |
| 2412       | 1       | 26      | 8        | 108/114.7 (MCS9) | PEAK     | 17.98                  | 30.00                       | -12.02                      | 1.39            | 19.37              | 36.02                    | -16.65               |
| 2437       | 6       | 26      | 0        | 108/114.7 (MCS9) | PEAK     | 17.66                  | 30.00                       | -12.34                      | 1.39            | 19.05              | 36.02                    | -16.97               |
| 2437       | 6       | 26      | 4        | 108/114.7 (MCS9) | PEAK     | 17.59                  | 30.00                       | -12.41                      | 1.39            | 18.98              | 36.02                    | -17.04               |
| 2437       | 6       | 26      | 8        | 108/114.7 (MCS9) | PEAK     | 17.67                  | 30.00                       | -12.33                      | 1.39            | 19.06              | 36.02                    | -16.96               |
| 2462       | 11      | 26      | 0        | 108/114.7 (MCS9) | PEAK     | 17.69                  | 30.00                       | -12.31                      | 1.39            | 19.08              | 36.02                    | -16.94               |
| 2462       | 11      | 26      | 4        | 108/114.7 (MCS9) | PEAK     | 17.98                  | 30.00                       | -12.02                      | 1.39            | 19.37              | 36.02                    | -16.65               |
| 2462       | 11      | 26      | 8        | 108/114.7 (MCS9) | PEAK     | 17.36                  | 30.00                       | -12.64                      | 1.39            | 18.75              | 36.02                    | -17.27               |
| 2467       | 12      | 26      | 0        | 108/114.7 (MCS9) | PEAK     | 17.36                  | 30.00                       | -12.64                      | 1.39            | 18.75              | 36.02                    | -17.27               |
| 2467       | 12      | 26      | 4        | 108/114.7 (MCS9) | PEAK     | 17.58                  | 30.00                       | -12.42                      | 1.39            | 18.97              | 36.02                    | -17.05               |
| 2467       | 12      | 26      | 8        | 108/114.7 (MCS9) | PEAK     | 16.91                  | 30.00                       | -13.09                      | 1.39            | 18.30              | 36.02                    | -17.72               |

**Table 7-30. Peak Conducted Output Power Measurements Antenna 0 (Common) (RU26)**

| Freq [MHz] | Channel | RU Size | RU Index | Data Rate [Mbps] | Detector | Conducted Powers (dBm) | Conducted Power Limit [dBm] | Conducted Power Margin [dB] | Ant. Gain [dBi] | Max e.i.r.p. [dBm] | Max e.i.r.p. Limit [dBm] | e.i.r.p. Margin [dB] |
|------------|---------|---------|----------|------------------|----------|------------------------|-----------------------------|-----------------------------|-----------------|--------------------|--------------------------|----------------------|
| 2412       | 1       | 242     | 61       | 108/114.7 (MCS9) | PEAK     | 19.51                  | 30.00                       | -10.49                      | 1.39            | 20.90              | 36.02                    | -15.12               |
| 2417       | 2       | 242     | 61       | 108/114.7 (MCS9) | PEAK     | 19.95                  | 30.00                       | -10.05                      | 1.39            | 21.34              | 36.02                    | -14.68               |
| 2422       | 3       | 242     | 61       | 108/114.7 (MCS9) | PEAK     | 21.48                  | 30.00                       | -8.52                       | 1.39            | 22.87              | 36.02                    | -13.15               |
| 2427       | 4       | 242     | 61       | 108/114.7 (MCS9) | PEAK     | 21.52                  | 30.00                       | -8.48                       | 1.39            | 22.91              | 36.02                    | -13.11               |
| 2432       | 5       | 242     | 61       | 108/114.7 (MCS9) | PEAK     | 21.60                  | 30.00                       | -8.40                       | 1.39            | 22.99              | 36.02                    | -13.03               |
| 2437       | 6       | 242     | 61       | 108/114.7 (MCS9) | PEAK     | 21.66                  | 30.00                       | -8.34                       | 1.39            | 23.05              | 36.02                    | -12.97               |
| 2442       | 7       | 242     | 61       | 108/114.7 (MCS9) | PEAK     | 21.60                  | 30.00                       | -8.40                       | 1.39            | 22.99              | 36.02                    | -13.03               |
| 2447       | 8       | 242     | 61       | 108/114.7 (MCS9) | PEAK     | 21.44                  | 30.00                       | -8.56                       | 1.39            | 22.83              | 36.02                    | -13.19               |
| 2452       | 9       | 242     | 61       | 108/114.7 (MCS9) | PEAK     | 21.34                  | 30.00                       | -8.66                       | 1.39            | 22.73              | 36.02                    | -13.29               |
| 2457       | 10      | 242     | 61       | 108/114.7 (MCS9) | PEAK     | 20.61                  | 30.00                       | -9.39                       | 1.39            | 22.00              | 36.02                    | -14.02               |
| 2462       | 11      | 242     | 61       | 108/114.7 (MCS9) | PEAK     | 19.28                  | 30.00                       | -10.72                      | 1.39            | 20.67              | 36.02                    | -15.35               |
| 2467       | 12      | 242     | 61       | 108/114.7 (MCS9) | PEAK     | 17.93                  | 30.00                       | -12.07                      | 1.39            | 19.32              | 36.02                    | -16.70               |

**Table 7-31. Peak Conducted Output Power Measurements Antenna 0 (Common) (RU242)**

| Freq [MHz] | Channel | RU Size | RU Index | Data Rate [Mbps] | Detector | Conducted Powers (dBm) | Conducted Power Limit [dBm] | Conducted Power Margin [dB] | Ant. Gain [dBi] | Max e.i.r.p. [dBm] | Max e.i.r.p. Limit [dBm] | e.i.r.p. Margin [dB] |
|------------|---------|---------|----------|------------------|----------|------------------------|-----------------------------|-----------------------------|-----------------|--------------------|--------------------------|----------------------|
| 2412       | 1       | 26      | 0        | 108/114.7 (MCS9) | PEAK     | 17.28                  | 30.00                       | -12.72                      | 1.48            | 18.76              | 36.02                    | -17.26               |
| 2412       | 1       | 26      | 4        | 108/114.7 (MCS9) | PEAK     | 17.86                  | 30.00                       | -12.14                      | 1.48            | 19.34              | 36.02                    | -16.68               |
| 2412       | 1       | 26      | 8        | 108/114.7 (MCS9) | PEAK     | 17.75                  | 30.00                       | -12.25                      | 1.48            | 19.23              | 36.02                    | -16.79               |
| 2437       | 6       | 26      | 0        | 108/114.7 (MCS9) | PEAK     | 17.78                  | 30.00                       | -12.22                      | 1.48            | 19.26              | 36.02                    | -16.76               |
| 2437       | 6       | 26      | 4        | 108/114.7 (MCS9) | PEAK     | 17.99                  | 30.00                       | -12.01                      | 1.48            | 19.47              | 36.02                    | -16.55               |
| 2437       | 6       | 26      | 8        | 108/114.7 (MCS9) | PEAK     | 17.91                  | 30.00                       | -12.10                      | 1.48            | 19.39              | 36.02                    | -16.64               |
| 2462       | 11      | 26      | 0        | 108/114.7 (MCS9) | PEAK     | 17.94                  | 30.00                       | -12.06                      | 1.48            | 19.42              | 36.02                    | -16.60               |
| 2462       | 11      | 26      | 4        | 108/114.7 (MCS9) | PEAK     | 17.71                  | 30.00                       | -12.29                      | 1.48            | 19.19              | 36.02                    | -16.83               |
| 2462       | 11      | 26      | 8        | 108/114.7 (MCS9) | PEAK     | 17.85                  | 30.00                       | -12.15                      | 1.48            | 19.33              | 36.02                    | -16.69               |
| 2467       | 12      | 26      | 0        | 108/114.7 (MCS9) | PEAK     | 17.40                  | 30.00                       | -12.60                      | 1.48            | 18.88              | 36.02                    | -17.14               |
| 2467       | 12      | 26      | 4        | 108/114.7 (MCS9) | PEAK     | 17.50                  | 30.00                       | -12.50                      | 1.48            | 18.98              | 36.02                    | -17.04               |
| 2467       | 12      | 26      | 8        | 108/114.7 (MCS9) | PEAK     | 17.53                  | 30.00                       | -12.47                      | 1.48            | 19.01              | 36.02                    | -17.01               |

**Table 7-32. Peak Conducted Output Power Measurements Antenna 1 (Common) (RU26)**

| Freq [MHz] | Channel | RU Size | RU Index | Data Rate [Mbps] | Detector | Conducted Powers (dBm) | Conducted Power Limit [dBm] | Conducted Power Margin [dB] | Ant. Gain [dBi] | Max e.i.r.p. [dBm] | Max e.i.r.p. Limit [dBm] | e.i.r.p. Margin [dB] |
|------------|---------|---------|----------|------------------|----------|------------------------|-----------------------------|-----------------------------|-----------------|--------------------|--------------------------|----------------------|
| 2412       | 1       | 242     | 61       | 108/114.7 (MCS9) | PEAK     | 19.33                  | 30.00                       | -10.68                      | 1.48            | 20.81              | 36.02                    | -15.22               |
| 2417       | 2       | 242     | 61       | 108/114.7 (MCS9) | PEAK     | 19.79                  | 30.00                       | -10.21                      | 1.48            | 21.27              | 36.02                    | -14.75               |
| 2422       | 3       | 242     | 61       | 108/114.7 (MCS9) | PEAK     | 20.95                  | 30.00                       | -9.05                       | 1.48            | 22.43              | 36.02                    | -13.59               |
| 2427       | 4       | 242     | 61       | 108/114.7 (MCS9) | PEAK     | 20.97                  | 30.00                       | -9.03                       | 1.48            | 22.45              | 36.02                    | -13.57               |
| 2432       | 5       | 242     | 61       | 108/114.7 (MCS9) | PEAK     | 21.00                  | 30.00                       | -9.00                       | 1.48            | 22.48              | 36.02                    | -13.54               |
| 2437       | 6       | 242     | 61       | 108/114.7 (MCS9) | PEAK     | 21.03                  | 30.00                       | -8.97                       | 1.48            | 22.51              | 36.02                    | -13.51               |
| 2442       | 7       | 242     | 61       | 108/114.7 (MCS9) | PEAK     | 20.99                  | 30.00                       | -9.01                       | 1.48            | 22.47              | 36.02                    | -13.55               |
| 2447       | 8       | 242     | 61       | 108/114.7 (MCS9) | PEAK     | 20.85                  | 30.00                       | -9.15                       | 1.48            | 22.33              | 36.02                    | -13.69               |
| 2452       | 9       | 242     | 61       | 108/114.7 (MCS9) | PEAK     | 20.79                  | 30.00                       | -9.21                       | 1.48            | 22.27              | 36.02                    | -13.75               |
| 2457       | 10      | 242     | 61       | 108/114.7 (MCS9) | PEAK     | 20.50                  | 30.00                       | -9.50                       | 1.48            | 21.98              | 36.02                    | -14.04               |
| 2462       | 11      | 242     | 61       | 108/114.7 (MCS9) | PEAK     | 19.41                  | 30.00                       | -10.59                      | 1.48            | 20.89              | 36.02                    | -15.13               |
| 2467       | 12      | 242     | 61       | 108/114.7 (MCS9) | PEAK     | 17.79                  | 30.00                       | -12.21                      | 1.48            | 19.27              | 36.02                    | -16.75               |

**Table 7-33. Peak Conducted Output Power Measurements Antenna 1 (Common) (RU242)**

|                                            |                                                                                     |                                                                                                                                                                                                                  |                                         |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|-----------------------------------|
| FCC ID: BCGA3300<br>IC: 579C-A3300         |  | Test Dates:<br>3/24/2025 - 11/26/2025                                                                                                                                                                            | EUT Type:<br>Smart Speaker with Display | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2503170028-05-R4.BCG |  | This report is Blockchain Verified. To verify the report authenticity, please visit <a href="https://www.blockchain-verified.com">https://www.blockchain-verified.com</a> or by clicking on the Blockchain logo. |                                         | Page 40 of 175                    |

| Freq [MHz] | Channel | RU Size | RU Index | Data Rate [Mbps] | Detector | Conducted Powers (dBm) | Conducted Power Limit [dBm] | Conducted Power Margin [dB] | Ant. Gain [dBi] | Max e.i.r.p. [dBm] | Max e.i.r.p. Limit [dBm] | e.i.r.p. Margin [dB] |
|------------|---------|---------|----------|------------------|----------|------------------------|-----------------------------|-----------------------------|-----------------|--------------------|--------------------------|----------------------|
| 2412       | 1       | 26      | 0        | 108/114.7 (MCS9) | PEAK     | 19.84                  | 30.00                       | -10.16                      | 1.39            | 21.23              | 36.02                    | -14.79               |
| 2412       | 1       | 26      | 4        | 108/114.7 (MCS9) | PEAK     | 19.77                  | 30.00                       | -10.23                      | 1.39            | 21.16              | 36.02                    | -14.86               |
| 2412       | 1       | 26      | 8        | 108/114.7 (MCS9) | PEAK     | 19.50                  | 30.00                       | -10.50                      | 1.39            | 20.89              | 36.02                    | -15.13               |
| 2437       | 6       | 26      | 0        | 108/114.7 (MCS9) | PEAK     | 19.65                  | 30.00                       | -10.36                      | 1.39            | 21.04              | 36.02                    | -14.99               |
| 2437       | 6       | 26      | 4        | 108/114.7 (MCS9) | PEAK     | 19.76                  | 30.00                       | -10.24                      | 1.39            | 21.15              | 36.02                    | -14.87               |
| 2462       | 11      | 26      | 0        | 108/114.7 (MCS9) | PEAK     | 19.51                  | 30.00                       | -10.49                      | 1.39            | 20.90              | 36.02                    | -15.12               |
| 2462       | 11      | 26      | 4        | 108/114.7 (MCS9) | PEAK     | 19.67                  | 30.00                       | -10.33                      | 1.39            | 21.06              | 36.02                    | -14.96               |
| 2462       | 11      | 26      | 8        | 108/114.7 (MCS9) | PEAK     | 19.66                  | 30.00                       | -10.34                      | 1.39            | 21.05              | 36.02                    | -14.97               |
| 2467       | 12      | 26      | 0        | 108/114.7 (MCS9) | PEAK     | 19.12                  | 30.00                       | -10.88                      | 1.39            | 20.51              | 36.02                    | -15.51               |
| 2467       | 12      | 26      | 4        | 108/114.7 (MCS9) | PEAK     | 19.29                  | 30.00                       | -10.71                      | 1.39            | 20.68              | 36.02                    | -15.34               |
| 2467       | 12      | 26      | 8        | 108/114.7 (MCS9) | PEAK     | 19.20                  | 30.00                       | -10.81                      | 1.39            | 20.59              | 36.02                    | -15.44               |

**Table 7-34. Peak Conducted Output Power Measurements Antenna 0 (Dedicated) (RU26)**

| Freq [MHz] | Channel | RU Size | RU Index | Data Rate [Mbps] | Detector | Conducted Powers (dBm) | Conducted Power Limit [dBm] | Conducted Power Margin [dB] | Ant. Gain [dBi] | Max e.i.r.p. [dBm] | Max e.i.r.p. Limit [dBm] | e.i.r.p. Margin [dB] |
|------------|---------|---------|----------|------------------|----------|------------------------|-----------------------------|-----------------------------|-----------------|--------------------|--------------------------|----------------------|
| 2412       | 1       | 242     | 61       | 108/114.7 (MCS9) | PEAK     | 22.83                  | 30.00                       | -7.17                       | 1.39            | 24.22              | 36.02                    | -11.80               |
| 2417       | 2       | 242     | 61       | 108/114.7 (MCS9) | PEAK     | 23.70                  | 30.00                       | -6.30                       | 1.39            | 25.09              | 36.02                    | -10.93               |
| 2422       | 3       | 242     | 61       | 108/114.7 (MCS9) | PEAK     | 25.01                  | 30.00                       | -4.99                       | 1.39            | 26.40              | 36.02                    | -9.62                |
| 2427       | 4       | 242     | 61       | 108/114.7 (MCS9) | PEAK     | 25.23                  | 30.00                       | -4.77                       | 1.39            | 26.62              | 36.02                    | -9.40                |
| 2432       | 5       | 242     | 61       | 108/114.7 (MCS9) | PEAK     | 25.25                  | 30.00                       | -4.76                       | 1.39            | 26.64              | 36.02                    | -9.39                |
| 2437       | 6       | 242     | 61       | 108/114.7 (MCS9) | PEAK     | 25.13                  | 30.00                       | -4.87                       | 1.39            | 26.52              | 36.02                    | -9.50                |
| 2442       | 7       | 242     | 61       | 108/114.7 (MCS9) | PEAK     | 24.59                  | 30.00                       | -5.41                       | 1.39            | 25.98              | 36.02                    | -10.04               |
| 2447       | 8       | 242     | 61       | 108/114.7 (MCS9) | PEAK     | 24.60                  | 30.00                       | -5.40                       | 1.39            | 25.99              | 36.02                    | -10.03               |
| 2452       | 9       | 242     | 61       | 108/114.7 (MCS9) | PEAK     | 23.45                  | 30.00                       | -6.55                       | 1.39            | 24.84              | 36.02                    | -11.18               |
| 2457       | 10      | 242     | 61       | 108/114.7 (MCS9) | PEAK     | 22.63                  | 30.00                       | -7.38                       | 1.39            | 24.02              | 36.02                    | -12.01               |
| 2462       | 11      | 242     | 61       | 108/114.7 (MCS9) | PEAK     | 21.60                  | 30.00                       | -8.40                       | 1.39            | 22.99              | 36.02                    | -13.03               |
| 2467       | 12      | 242     | 61       | 108/114.7 (MCS9) | PEAK     | 19.69                  | 30.00                       | -10.31                      | 1.39            | 21.08              | 36.02                    | -14.94               |

**Table 7-35. Peak Conducted Output Power Measurements Antenna 0 (Dedicated) (RU242)**

| Freq [MHz] | Channel | RU Size | RU Index | Data Rate [Mbps] | Detector | Conducted Powers (dBm) | Conducted Power Limit [dBm] | Conducted Power Margin [dB] | Ant. Gain [dBi] | Max e.i.r.p. [dBm] | Max e.i.r.p. Limit [dBm] | e.i.r.p. Margin [dB] |
|------------|---------|---------|----------|------------------|----------|------------------------|-----------------------------|-----------------------------|-----------------|--------------------|--------------------------|----------------------|
| 2412       | 1       | 26      | 0        | 108/114.7 (MCS9) | PEAK     | 20.23                  | 30.00                       | -9.77                       | 1.48            | 21.71              | 36.02                    | -14.31               |
| 2412       | 1       | 26      | 4        | 108/114.7 (MCS9) | PEAK     | 20.16                  | 30.00                       | -9.84                       | 1.48            | 21.64              | 36.02                    | -14.38               |
| 2412       | 1       | 26      | 8        | 108/114.7 (MCS9) | PEAK     | 20.11                  | 30.00                       | -9.89                       | 1.48            | 21.59              | 36.02                    | -14.43               |
| 2437       | 6       | 26      | 0        | 108/114.7 (MCS9) | PEAK     | 19.47                  | 30.00                       | -10.53                      | 1.48            | 20.95              | 36.02                    | -15.07               |
| 2437       | 6       | 26      | 4        | 108/114.7 (MCS9) | PEAK     | 20.19                  | 30.00                       | -9.81                       | 1.48            | 21.67              | 36.02                    | -14.35               |
| 2462       | 11      | 26      | 0        | 108/114.7 (MCS9) | PEAK     | 19.72                  | 30.00                       | -10.28                      | 1.48            | 21.20              | 36.02                    | -14.82               |
| 2462       | 11      | 26      | 4        | 108/114.7 (MCS9) | PEAK     | 20.06                  | 30.00                       | -9.94                       | 1.48            | 21.54              | 36.02                    | -14.48               |
| 2462       | 11      | 26      | 8        | 108/114.7 (MCS9) | PEAK     | 19.97                  | 30.00                       | -10.03                      | 1.48            | 21.45              | 36.02                    | -14.57               |
| 2467       | 12      | 26      | 0        | 108/114.7 (MCS9) | PEAK     | 19.35                  | 30.00                       | -10.65                      | 1.48            | 20.83              | 36.02                    | -15.19               |
| 2467       | 12      | 26      | 4        | 108/114.7 (MCS9) | PEAK     | 19.43                  | 30.00                       | -10.57                      | 1.48            | 20.91              | 36.02                    | -15.11               |
| 2467       | 12      | 26      | 8        | 108/114.7 (MCS9) | PEAK     | 19.06                  | 30.00                       | -10.94                      | 1.48            | 20.54              | 36.02                    | -15.48               |

**Table 7-36. Peak Conducted Output Power Measurements Antenna 1 (Dedicated) (RU26)**

| Freq [MHz] | Channel | RU Size | RU Index | Data Rate [Mbps] | Detector | Conducted Powers (dBm) | Conducted Power Limit [dBm] | Conducted Power Margin [dB] | Ant. Gain [dBi] | Max e.i.r.p. [dBm] | Max e.i.r.p. Limit [dBm] | e.i.r.p. Margin [dB] |
|------------|---------|---------|----------|------------------|----------|------------------------|-----------------------------|-----------------------------|-----------------|--------------------|--------------------------|----------------------|
| 2412       | 1       | 242     | 61       | 108/114.7 (MCS9) | PEAK     | 22.77                  | 30.00                       | -7.23                       | 1.48            | 24.25              | 36.02                    | -11.77               |
| 2417       | 2       | 242     | 61       | 108/114.7 (MCS9) | PEAK     | 23.82                  | 30.00                       | -6.18                       | 1.48            | 25.30              | 36.02                    | -10.72               |
| 2422       | 3       | 242     | 61       | 108/114.7 (MCS9) | PEAK     | 24.90                  | 30.00                       | -5.10                       | 1.48            | 26.38              | 36.02                    | -9.64                |
| 2427       | 4       | 242     | 61       | 108/114.7 (MCS9) | PEAK     | 25.11                  | 30.00                       | -4.89                       | 1.48            | 26.59              | 36.02                    | -9.43                |
| 2432       | 5       | 242     | 61       | 108/114.7 (MCS9) | PEAK     | 25.10                  | 30.00                       | -4.90                       | 1.48            | 26.58              | 36.02                    | -9.44                |
| 2437       | 6       | 242     | 61       | 108/114.7 (MCS9) | PEAK     | 24.94                  | 30.00                       | -5.06                       | 1.48            | 26.42              | 36.02                    | -9.60                |
| 2442       | 7       | 242     | 61       | 108/114.7 (MCS9) | PEAK     | 24.65                  | 30.00                       | -5.35                       | 1.48            | 26.13              | 36.02                    | -9.89                |
| 2447       | 8       | 242     | 61       | 108/114.7 (MCS9) | PEAK     | 24.55                  | 30.00                       | -5.45                       | 1.48            | 26.03              | 36.02                    | -9.99                |
| 2452       | 9       | 242     | 61       | 108/114.7 (MCS9) | PEAK     | 23.51                  | 30.00                       | -6.49                       | 1.48            | 24.99              | 36.02                    | -11.03               |
| 2457       | 10      | 242     | 61       | 108/114.7 (MCS9) | PEAK     | 22.27                  | 30.00                       | -7.73                       | 1.48            | 23.75              | 36.02                    | -12.27               |
| 2462       | 11      | 242     | 61       | 108/114.7 (MCS9) | PEAK     | 21.31                  | 30.00                       | -8.69                       | 1.48            | 22.79              | 36.02                    | -13.23               |
| 2467       | 12      | 242     | 61       | 108/114.7 (MCS9) | PEAK     | 19.84                  | 30.00                       | -10.17                      | 1.48            | 21.32              | 36.02                    | -14.71               |

**Table 7-37. Peak Conducted Output Power Measurements Antenna 1 (Dedicated) (RU242)**

|                                            |                                                                                     |                                                                                                                                                                                                                  |                                         |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|-----------------------------------|
| FCC ID: BCGA3300<br>IC: 579C-A3300         |  | Test Dates:<br>3/24/2025 - 11/26/2025                                                                                                                                                                            | EUT Type:<br>Smart Speaker with Display | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2503170028-05-R4.BCG |  | This report is Blockchain Verified. To verify the report authenticity, please visit <a href="https://www.blockchain-verified.com">https://www.blockchain-verified.com</a> or by clicking on the Blockchain logo. |                                         | Page 41 of 175                    |

| Freq [MHz] | Channel | RU Size | RU Index | Data Rate [Mbps] | Detector | Conducted Power [dBm] |       |       | Conducted Power Limit [dBm] | Conducted Power Margin [dB] | Directional Ant. Gain [dBi] | Max e.i.r.p. [dBm] | Max e.i.r.p. Limit [dBm] | e.i.r.p. Margin [dB] |
|------------|---------|---------|----------|------------------|----------|-----------------------|-------|-------|-----------------------------|-----------------------------|-----------------------------|--------------------|--------------------------|----------------------|
| 2412       | 1       | 26      | 0        | 216/229.4 (MCS9) | PEAK     | 16.69                 | 16.89 | 19.80 | 30.00                       | -10.20                      | 4.45                        | 24.25              | 36.02                    | -11.77               |
| 2412       | 1       | 26      | 4        | 216/229.4 (MCS9) | PEAK     | 17.00                 | 16.77 | 19.90 | 30.00                       | -10.10                      | 4.45                        | 24.34              | 36.02                    | -11.68               |
| 2412       | 1       | 26      | 8        | 216/229.4 (MCS9) | PEAK     | 16.78                 | 16.54 | 19.67 | 30.00                       | -10.33                      | 4.45                        | 24.12              | 36.02                    | -11.90               |
| 2437       | 6       | 26      | 0        | 216/229.4 (MCS9) | PEAK     | 16.73                 | 16.81 | 19.78 | 30.00                       | -10.22                      | 4.45                        | 24.23              | 36.02                    | -11.79               |
| 2437       | 6       | 26      | 4        | 216/229.4 (MCS9) | PEAK     | 16.79                 | 16.95 | 19.88 | 30.00                       | -10.12                      | 4.45                        | 24.33              | 36.02                    | -11.69               |
| 2437       | 6       | 26      | 8        | 216/229.4 (MCS9) | PEAK     | 16.82                 | 16.76 | 19.80 | 30.00                       | -10.20                      | 4.45                        | 24.24              | 36.02                    | -11.78               |
| 2462       | 11      | 26      | 0        | 216/229.4 (MCS9) | PEAK     | 16.88                 | 16.68 | 19.79 | 30.00                       | -10.21                      | 4.45                        | 24.24              | 36.02                    | -11.78               |
| 2462       | 11      | 26      | 4        | 216/229.4 (MCS9) | PEAK     | 17.00                 | 16.56 | 19.80 | 30.00                       | -10.20                      | 4.45                        | 24.24              | 36.02                    | -11.78               |
| 2462       | 11      | 26      | 8        | 216/229.4 (MCS9) | PEAK     | 16.80                 | 16.65 | 19.74 | 30.00                       | -10.26                      | 4.45                        | 24.18              | 36.02                    | -11.84               |
| 2467       | 12      | 26      | 0        | 216/229.4 (MCS9) | PEAK     | 16.71                 | 16.65 | 19.69 | 30.00                       | -10.31                      | 4.45                        | 24.13              | 36.02                    | -11.89               |
| 2467       | 12      | 26      | 4        | 216/229.4 (MCS9) | PEAK     | 16.84                 | 16.68 | 19.77 | 30.00                       | -10.23                      | 4.45                        | 24.21              | 36.02                    | -11.81               |
| 2467       | 12      | 26      | 8        | 216/229.4 (MCS9) | PEAK     | 16.92                 | 16.69 | 19.82 | 30.00                       | -10.18                      | 4.45                        | 24.26              | 36.02                    | -11.76               |

**Table 7-38. Peak Conducted Output Power Measurements CDD (Common) (RU26)**

| Freq [MHz] | Channel | RU Size | RU Index | Data Rate [Mbps] | Detector | Conducted Power [dBm] |                    |        | Conducted Power Limit [dBm] | Conducted Power Margin [dB] | Directional Ant. Gain [dBi] | Max e.i.r.p. [dBm] | Max e.i.r.p. Limit [dBm] | e.i.r.p. Margin [dB] |
|------------|---------|---------|----------|------------------|----------|-----------------------|--------------------|--------|-----------------------------|-----------------------------|-----------------------------|--------------------|--------------------------|----------------------|
|            |         |         |          |                  |          | Antenna 0 (Common)    | Antenna 1 (Common) | Summed |                             |                             |                             |                    |                          |                      |
| 2412       | 1       | 242     | 61       | 216/229.4 (MCS9) | PEAK     | 18.72                 | 18.65              | 21.69  | 30.00                       | -8.31                       | 4.45                        | 26.14              | 36.02                    | -9.88                |
| 2417       | 2       | 242     | 61       | 216/229.4 (MCS9) | PEAK     | 19.41                 | 19.30              | 22.37  | 30.00                       | -7.63                       | 4.45                        | 26.81              | 36.02                    | -9.21                |
| 2422       | 3       | 242     | 61       | 216/229.4 (MCS9) | PEAK     | 21.24                 | 20.78              | 24.03  | 30.00                       | -5.97                       | 4.45                        | 28.47              | 36.02                    | -7.55                |
| 2427       | 4       | 242     | 61       | 216/229.4 (MCS9) | PEAK     | 21.33                 | 20.80              | 24.08  | 30.00                       | -5.92                       | 4.45                        | 28.53              | 36.02                    | -7.49                |
| 2432       | 5       | 242     | 61       | 216/229.4 (MCS9) | PEAK     | 21.37                 | 20.81              | 24.11  | 30.00                       | -5.89                       | 4.45                        | 28.55              | 36.02                    | -7.47                |
| 2437       | 6       | 242     | 61       | 216/229.4 (MCS9) | PEAK     | 21.42                 | 20.83              | 24.14  | 30.00                       | -5.86                       | 4.45                        | 28.59              | 36.02                    | -7.43                |
| 2442       | 7       | 242     | 61       | 216/229.4 (MCS9) | PEAK     | 20.50                 | 20.79              | 23.66  | 30.00                       | -6.34                       | 4.45                        | 28.10              | 36.02                    | -7.92                |
| 2447       | 8       | 242     | 61       | 216/229.4 (MCS9) | PEAK     | 21.16                 | 20.66              | 23.93  | 30.00                       | -6.07                       | 4.45                        | 28.37              | 36.02                    | -7.65                |
| 2452       | 9       | 242     | 61       | 216/229.4 (MCS9) | PEAK     | 20.96                 | 20.57              | 23.78  | 30.00                       | -6.22                       | 4.45                        | 28.22              | 36.02                    | -7.80                |
| 2457       | 10      | 242     | 61       | 216/229.4 (MCS9) | PEAK     | 19.89                 | 19.59              | 22.75  | 30.00                       | -7.25                       | 4.45                        | 27.20              | 36.02                    | -8.82                |
| 2462       | 11      | 242     | 61       | 216/229.4 (MCS9) | PEAK     | 18.67                 | 18.63              | 21.66  | 30.00                       | -8.34                       | 4.45                        | 26.11              | 36.02                    | -9.91                |
| 2467       | 12      | 242     | 61       | 216/229.4 (MCS9) | PEAK     | 17.32                 | 17.00              | 20.17  | 30.00                       | -9.83                       | 4.45                        | 24.62              | 36.02                    | -11.40               |

**Table 7-39. Peak Conducted Output Power Measurements CDD (Common) (RU242)**

| Freq [MHz] | Channel | RU Size | RU Index | Data Rate [Mbps] | Detector | Conducted Power [dBm] |                       |        | Conducted Power Limit [dBm] | Conducted Power Margin [dB] | Directional Ant. Gain [dBi] | Max e.i.r.p. [dBm] | Max e.i.r.p. Limit [dBm] | e.i.r.p. Margin [dB] |
|------------|---------|---------|----------|------------------|----------|-----------------------|-----------------------|--------|-----------------------------|-----------------------------|-----------------------------|--------------------|--------------------------|----------------------|
|            |         |         |          |                  |          | Antenna 0 (Dedicated) | Antenna 1 (Dedicated) | Summed |                             |                             |                             |                    |                          |                      |
| 2412       | 1       | 26      | 0        | 216/229.4 (MCS9) | PEAK     | 18.70                 | 18.92                 | 21.82  | 30.00                       | -8.18                       | 4.45                        | 26.27              | 36.02                    | -9.75                |
| 2412       | 1       | 26      | 4        | 216/229.4 (MCS9) | PEAK     | 18.89                 | 19.11                 | 22.01  | 30.00                       | -7.99                       | 4.45                        | 26.46              | 36.02                    | -9.56                |
| 2412       | 1       | 26      | 8        | 216/229.4 (MCS9) | PEAK     | 18.64                 | 18.75                 | 21.70  | 30.00                       | -8.30                       | 4.45                        | 26.15              | 36.02                    | -9.87                |
| 2437       | 6       | 26      | 0        | 216/229.4 (MCS9) | PEAK     | 18.57                 | 18.99                 | 21.80  | 30.00                       | -8.20                       | 4.45                        | 26.24              | 36.02                    | -9.78                |
| 2437       | 6       | 26      | 4        | 216/229.4 (MCS9) | PEAK     | 18.82                 | 18.99                 | 21.92  | 30.00                       | -8.08                       | 4.45                        | 26.36              | 36.02                    | -9.66                |
| 2462       | 11      | 26      | 0        | 216/229.4 (MCS9) | PEAK     | 18.90                 | 18.73                 | 21.83  | 30.00                       | -8.17                       | 4.45                        | 26.27              | 36.02                    | -9.75                |
| 2462       | 11      | 26      | 4        | 216/229.4 (MCS9) | PEAK     | 18.93                 | 18.68                 | 21.82  | 30.00                       | -8.18                       | 4.45                        | 26.26              | 36.02                    | -9.76                |
| 2462       | 11      | 26      | 8        | 216/229.4 (MCS9) | PEAK     | 18.50                 | 18.81                 | 21.67  | 30.00                       | -8.33                       | 4.45                        | 26.12              | 36.02                    | -9.90                |
| 2467       | 12      | 26      | 0        | 216/229.4 (MCS9) | PEAK     | 18.92                 | 18.74                 | 21.84  | 30.00                       | -8.16                       | 4.45                        | 26.29              | 36.02                    | -9.73                |
| 2467       | 12      | 26      | 4        | 216/229.4 (MCS9) | PEAK     | 19.06                 | 18.80                 | 21.94  | 30.00                       | -8.06                       | 4.45                        | 26.39              | 36.02                    | -9.63                |
| 2467       | 12      | 26      | 8        | 216/229.4 (MCS9) | PEAK     | 19.06                 | 19.16                 | 22.12  | 30.00                       | -7.88                       | 4.45                        | 26.57              | 36.02                    | -9.46                |

**Table 7-40. Peak Conducted Output Power Measurements CDD (Dedicated) (RU26)**

| Freq [MHz] | Channel | RU Size | RU Index | Data Rate [Mbps] | Detector | Conducted Power [dBm] |                       |        | Conducted Power Limit [dBm] | Conducted Power Margin [dB] | Directional Ant. Gain [dBi] | Max e.i.r.p. [dBm] | Max e.i.r.p. Limit [dBm] | e.i.r.p. Margin [dB] |
|------------|---------|---------|----------|------------------|----------|-----------------------|-----------------------|--------|-----------------------------|-----------------------------|-----------------------------|--------------------|--------------------------|----------------------|
|            |         |         |          |                  |          | Antenna 0 (Dedicated) | Antenna 1 (Dedicated) | Summed |                             |                             |                             |                    |                          |                      |
| 2412       | 1       | 242     | 61       | 216/229.4 (MCS9) | PEAK     | 21.93                 | 21.79                 | 24.87  | 30.00                       | -5.13                       | 4.45                        | 29.32              | 36.02                    | -6.70                |
| 2417       | 2       | 242     | 61       | 216/229.4 (MCS9) | PEAK     | 22.86                 | 22.90                 | 25.89  | 30.00                       | -4.11                       | 4.45                        | 30.34              | 36.02                    | -5.68                |
| 2422       | 3       | 242     | 61       | 216/229.4 (MCS9) | PEAK     | 24.68                 | 24.30                 | 27.50  | 30.00                       | -2.50                       | 4.45                        | 31.95              | 36.02                    | -4.07                |
| 2427       | 4       | 242     | 61       | 216/229.4 (MCS9) | PEAK     | 25.02                 | 24.79                 | 27.92  | 30.00                       | -2.08                       | 4.45                        | 32.36              | 36.02                    | -3.66                |
| 2432       | 5       | 242     | 61       | 216/229.4 (MCS9) | PEAK     | 25.10                 | 24.81                 | 27.97  | 30.00                       | -2.03                       | 4.45                        | 32.41              | 36.02                    | -3.61                |
| 2437       | 6       | 242     | 61       | 216/229.4 (MCS9) | PEAK     | 24.92                 | 24.66                 | 27.80  | 30.00                       | -2.20                       | 4.45                        | 32.25              | 36.02                    | -3.77                |
| 2442       | 7       | 242     | 61       | 216/229.4 (MCS9) | PEAK     | 24.54                 | 24.31                 | 27.44  | 30.00                       | -2.56                       | 4.45                        | 31.88              | 36.02                    | -4.14                |
| 2447       | 8       | 242     | 61       | 216/229.4 (MCS9) | PEAK     | 24.16                 | 24.11                 | 27.15  | 30.00                       | -2.85                       | 4.45                        | 31.59              | 36.02                    | -4.43                |
| 2452       | 9       | 242     | 61       | 216/229.4 (MCS9) | PEAK     | 23.55                 | 23.24                 | 26.41  | 30.00                       | -3.59                       | 4.45                        | 30.85              | 36.02                    | -5.17                |
| 2457       | 10      | 242     | 61       | 216/229.4 (MCS9) | PEAK     | 22.37                 | 22.26                 | 25.32  | 30.00                       | -4.68                       | 4.45                        | 29.77              | 36.02                    | -6.25                |
| 2462       | 11      | 242     | 61       | 216/229.4 (MCS9) | PEAK     | 21.45                 | 21.33                 | 24.40  | 30.00                       | -5.60                       | 4.45                        | 28.85              | 36.02                    | -7.17                |
| 2467       | 12      | 242     | 61       | 216/229.4 (MCS9) | PEAK     | 19.00                 | 19.22                 | 22.12  | 30.00                       | -7.88                       | 4.45                        | 26.57              | 36.02                    | -9.45                |

**Table 7-41. Peak Conducted Output Power Measurements CDD (Dedicated) (RU242)**

|                                                   |                                                                                     |                                                                                                                                                                                                                  |                                                |                                          |
|---------------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------|------------------------------------------|
| <b>FCC ID:</b> BCGA3300<br><b>IC:</b> 579C-A3300  |  | <b>Test Dates:</b><br>3/24/2025 - 11/26/2025                                                                                                                                                                     | <b>EUT Type:</b><br>Smart Speaker with Display | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1C2503170028-05-R4.BCG |  | This report is Blockchain Verified. To verify the report authenticity, please visit <a href="https://www.blockchain-verified.com">https://www.blockchain-verified.com</a> or by clicking on the Blockchain logo. |                                                | Page 42 of 175                           |

**Note:**

Per ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 and KDB 662911 D01 v02r01 Section E)1), the conducted powers at Antenna 0 and Antenna 1 were first measured separately during CDD transmission as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Per ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 Subclause 14.6.3, the directional gain is calculated using the following formula, where  $G_N$  is the gain of the nth antenna and  $N_{ANT}$ , the total number of antennas used.

$$\text{Directional gain} = 10 \log [(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{ANT}] \text{ dBi}$$

**Sample CDD Calculation:**

At 2412MHz the average conducted output power was measured to be 11.43 dBm for Antenna 0 and 11.46 dBm for Antenna 1.

$$\text{Antenna 0} + \text{Antenna 1} = \text{CDD}$$

$$(11.43 \text{ dBm} + 11.46 \text{ dBm}) = (13.899 \text{ mW} + 13.996 \text{ mW}) = 27.895 \text{ mW} = 14.45 \text{ dBm}$$

**Sample e.i.r.p. Calculation:**

At 2412MHz, the average conducted output power was calculated to be 14.45 dBm with directional gain of 3.78 dBi.

$$\text{e.i.r.p. (dBm)} = \text{Conducted Power (dBm)} + \text{Ant gain (dBi)}$$

$$14.45 \text{ dBm} + 3.78 \text{ dBi} = 18.24 \text{ dBm}$$

|                                                   |                                                                                     |                                                                                                                                                                                                                  |                                                |                                          |
|---------------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------|------------------------------------------|
| <b>FCC ID:</b> BCGA3300<br><b>IC:</b> 579C-A3300  |  | <b>Test Dates:</b><br>3/24/2025 - 11/26/2025                                                                                                                                                                     | <b>EUT Type:</b><br>Smart Speaker with Display | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1C2503170028-05-R4.BCG |  | This report is Blockchain Verified. To verify the report authenticity, please visit <a href="https://www.blockchain-verified.com">https://www.blockchain-verified.com</a> or by clicking on the Blockchain logo. |                                                | Page 43 of 175                           |

## 7.5 Power Spectral Density

### Test Overview and Limit

The peak power density is measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates, RU configurations, and RU indices were investigated and the worst case configuration results are reported in this section.

***The maximum permissible power spectral density is 8 dBm in any 3 kHz band.***

### Test Procedure Used

ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 – Subclause 11.10.2 Method PKPSD  
KDB 558074 D01 v05r02 – Section 8.4 DTS Maximum Power Spectral Density level in the fundamental emission  
ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 – Subclause 14.5.2.2 Measure-and-Sum Technique  
KDB 662911 D01 v02r01 – Section E)2) Measure-and-Sum Technique

### Test Settings

1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span = 1.5 times the DTS channel bandwidth
3. RBW = 3kHz
4. VBW  $\geq 3 \times$  RBW
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 7-4. Test Instrument & Measurement Setup**

|                                            |                                                                                     |                                                                                                                                                                                                                  |                                         |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|-----------------------------------|
| FCC ID: BCGA3300<br>IC: 579C-A3300         |  | Test Dates:<br>3/24/2025 - 11/26/2025                                                                                                                                                                            | EUT Type:<br>Smart Speaker with Display | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2503170028-05-R4.BCG |  | This report is Blockchain Verified. To verify the report authenticity, please visit <a href="https://www.blockchain-verified.com">https://www.blockchain-verified.com</a> or by clicking on the Blockchain logo. |                                         | Page 44 of 175                    |

**Test Notes**

- 1. All data rates were investigated and only the worst case is reported.
- 2. All RU's were investigated and tabular data has been reported. Only worst case partially-loaded and fully-loaded RU's plot are reported.

|                                                   |                                                                                             |                                                                                                                                                                                                                  |                                                |                                          |
|---------------------------------------------------|---------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------|------------------------------------------|
| <b>FCC ID:</b> BCGA3300<br><b>IC:</b> 579C-A3300  |  element | <b>Test Dates:</b><br>3/24/2025 - 11/26/2025                                                                                                                                                                     | <b>EUT Type:</b><br>Smart Speaker with Display | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1C2503170028-05-R4.BCG |          | This report is Blockchain Verified. To verify the report authenticity, please visit <a href="https://www.blockchain-verified.com">https://www.blockchain-verified.com</a> or by clicking on the Blockchain logo. |                                                | Page 45 of 175                           |

## 7.5.1 Antenna 0 (Common) Power Spectral Density Measurements


| Frequency [MHz] | Channel No. | 802.11 MODE | RU Size | RU Index | Data Rate [Mbps] | Measured Power Density [dBm/3kHz] | Max Power Density [dBm/3kHz] | Margin [dB] | Pass/Fail |
|-----------------|-------------|-------------|---------|----------|------------------|-----------------------------------|------------------------------|-------------|-----------|
| 2412            | 1           | ax          | 26      | 0        | 10/11.8 (MCS9)   | -10.35                            | 8.0                          | -18.35      | Pass      |
|                 |             |             | 26      | 4        | 10/11.8 (MCS9)   | -10.69                            | 8.0                          | -18.69      | Pass      |
|                 |             |             | 26      | 8        | 10/11.8 (MCS9)   | -10.09                            | 8.0                          | -18.09      | Pass      |
| 2437            | 6           | ax          | 26      | 0        | 10/11.8 (MCS9)   | -10.15                            | 8.0                          | -18.15      | Pass      |
|                 |             |             | 26      | 4        | 10/11.8 (MCS9)   | -9.28                             | 8.0                          | -17.28      | Pass      |
|                 |             |             | 26      | 8        | 10/11.8 (MCS9)   | -9.68                             | 8.0                          | -17.68      | Pass      |
| 2462            | 11          | ax          | 26      | 0        | 10/11.8 (MCS9)   | -9.15                             | 8.0                          | -17.15      | Pass      |
|                 |             |             | 26      | 4        | 10/11.8 (MCS9)   | -9.06                             | 8.0                          | -17.06      | Pass      |
|                 |             |             | 26      | 8        | 10/11.8 (MCS9)   | -9.29                             | 8.0                          | -17.29      | Pass      |

**Table 7-42. Conducted Power Density Measurements Antenna 0 (Common) – RU26**


| Frequency [MHz] | Channel | 802.11 MODE | RU Size | RU Index | Data Rate [Mbps]  | Measured Power Density [dBm/3kHz] | Max Power Density [dBm/3kHz] | Margin [dB] | Pass/Fail |
|-----------------|---------|-------------|---------|----------|-------------------|-----------------------------------|------------------------------|-------------|-----------|
| 2412            | 1       | ax (20MHz)  | 242     | 61       | 97.5/114.7 (MCS9) | -17.52                            | 8.0                          | -25.52      | Pass      |
| 2437            | 6       | ax (20MHz)  | 242     | 61       | 97.5/114.7 (MCS9) | -13.29                            | 8.0                          | -21.29      | Pass      |
| 2462            | 11      | ax (20MHz)  | 242     | 61       | 97.5/114.7 (MCS9) | -16.83                            | 8.0                          | -24.83      | Pass      |

**Table 7-43. Conducted Power Density Measurements Antenna 0 (Common) – RU242**

|                                                   |                                                                                     |                                                                                                                                                                                                                  |                                                |                                          |
|---------------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------|------------------------------------------|
| <b>FCC ID:</b> BCGA3300<br><b>IC:</b> 579C-A3300  |  | <b>Test Dates:</b><br>3/24/2025 - 11/26/2025                                                                                                                                                                     | <b>EUT Type:</b><br>Smart Speaker with Display | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1C2503170028-05-R4.BCG |  | This report is Blockchain Verified. To verify the report authenticity, please visit <a href="https://www.blockchain-verified.com">https://www.blockchain-verified.com</a> or by clicking on the Blockchain logo. |                                                | Page 46 of 175                           |

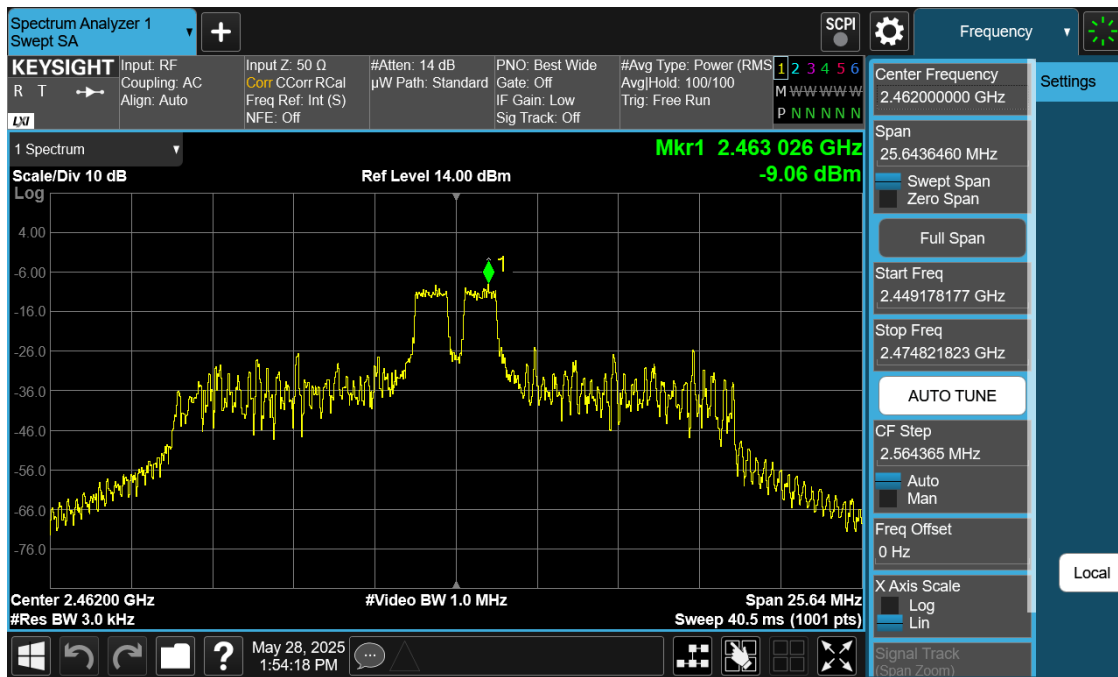

Plot 7-17. Power Spectral Density Plot Antenna 0 (Common) (802.11ax OFDMA – RU26 Index 4 – Ch. 11)

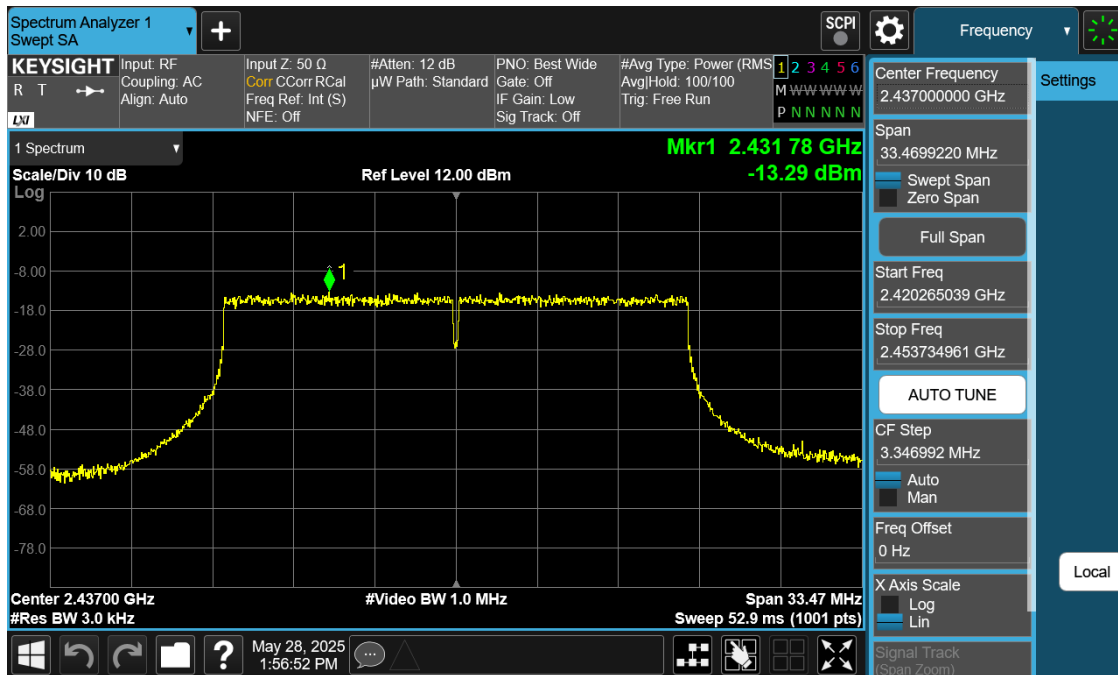

Plot 7-18. Power Spectral Density Plot Antenna 0 (Common) (802.11ax OFDMA – RU242 – Ch. 6)

|                                            |                                                                                     |                                                                                                                                                                                                                  |                                         |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|-----------------------------------|
| FCC ID: BCGA3300<br>IC: 579C-A3300         |  | Test Dates:<br>3/24/2025 - 11/26/2025                                                                                                                                                                            | EUT Type:<br>Smart Speaker with Display | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2503170028-05-R4.BCG |  | This report is Blockchain Verified. To verify the report authenticity, please visit <a href="https://www.blockchain-verified.com">https://www.blockchain-verified.com</a> or by clicking on the Blockchain logo. |                                         | Page 47 of 175                    |

## 7.5.2 Antenna 1 (Common) Power Spectral Density Measurements


| Frequency [MHz] | Channel No. | 802.11 MODE | RU Size | RU Index | Data Rate [Mbps] | Measured Power Density [dBm/3kHz] | Max Power Density [dBm/3kHz] | Margin [dB] | Pass/Fail |
|-----------------|-------------|-------------|---------|----------|------------------|-----------------------------------|------------------------------|-------------|-----------|
| 2412            | 1           | ax          | 26      | 0        | 10/11.8 (MCS9)   | -9.79                             | 8.0                          | -17.79      | Pass      |
|                 |             |             | 26      | 4        | 10/11.8 (MCS9)   | -9.18                             | 8.0                          | -17.18      | Pass      |
|                 |             |             | 26      | 8        | 10/11.8 (MCS9)   | -8.68                             | 8.0                          | -16.68      | Pass      |
| 2437            | 6           | ax          | 26      | 0        | 10/11.8 (MCS9)   | -9.32                             | 8.0                          | -17.32      | Pass      |
|                 |             |             | 26      | 4        | 10/11.8 (MCS9)   | -8.94                             | 8.0                          | -16.94      | Pass      |
|                 |             |             | 26      | 8        | 10/11.8 (MCS9)   | -8.69                             | 8.0                          | -16.69      | Pass      |
| 2462            | 11          | ax          | 26      | 0        | 10/11.8 (MCS9)   | -8.39                             | 8.0                          | -16.39      | Pass      |
|                 |             |             | 26      | 4        | 10/11.8 (MCS9)   | -8.93                             | 8.0                          | -16.93      | Pass      |
|                 |             |             | 26      | 8        | 10/11.8 (MCS9)   | -8.39                             | 8.0                          | -16.39      | Pass      |

**Table 7-44. Conducted Power Density Measurements Antenna 1 (Common) – RU26**


| Frequency [MHz] | Channel | 802.11 MODE | RU Size | RU Index | Data Rate [Mbps]  | Measured Power Density [dBm/3kHz] | Max Power Density [dBm/3kHz] | Margin [dB] | Pass/Fail |
|-----------------|---------|-------------|---------|----------|-------------------|-----------------------------------|------------------------------|-------------|-----------|
| 2412            | 1       | ax (20MHz)  | 242     | 61       | 97.5/114.7 (MCS9) | -16.92                            | 8.0                          | -24.92      | Pass      |
| 2437            | 6       | ax (20MHz)  | 242     | 61       | 97.5/114.7 (MCS9) | -12.31                            | 8.0                          | -20.31      | Pass      |
| 2462            | 11      | ax (20MHz)  | 242     | 61       | 97.5/114.7 (MCS9) | -17.43                            | 8.0                          | -25.43      | Pass      |

**Table 7-45. Conducted Power Density Measurements Antenna 1 (Common) – RU242**

|                                                   |                                                                                     |                                                                                                                                                                                                                  |                                                |                                          |
|---------------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------|------------------------------------------|
| <b>FCC ID:</b> BCGA3300<br><b>IC:</b> 579C-A3300  |  | <b>Test Dates:</b><br>3/24/2025 - 11/26/2025                                                                                                                                                                     | <b>EUT Type:</b><br>Smart Speaker with Display | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1C2503170028-05-R4.BCG |  | This report is Blockchain Verified. To verify the report authenticity, please visit <a href="https://www.blockchain-verified.com">https://www.blockchain-verified.com</a> or by clicking on the Blockchain logo. |                                                | Page 48 of 175                           |

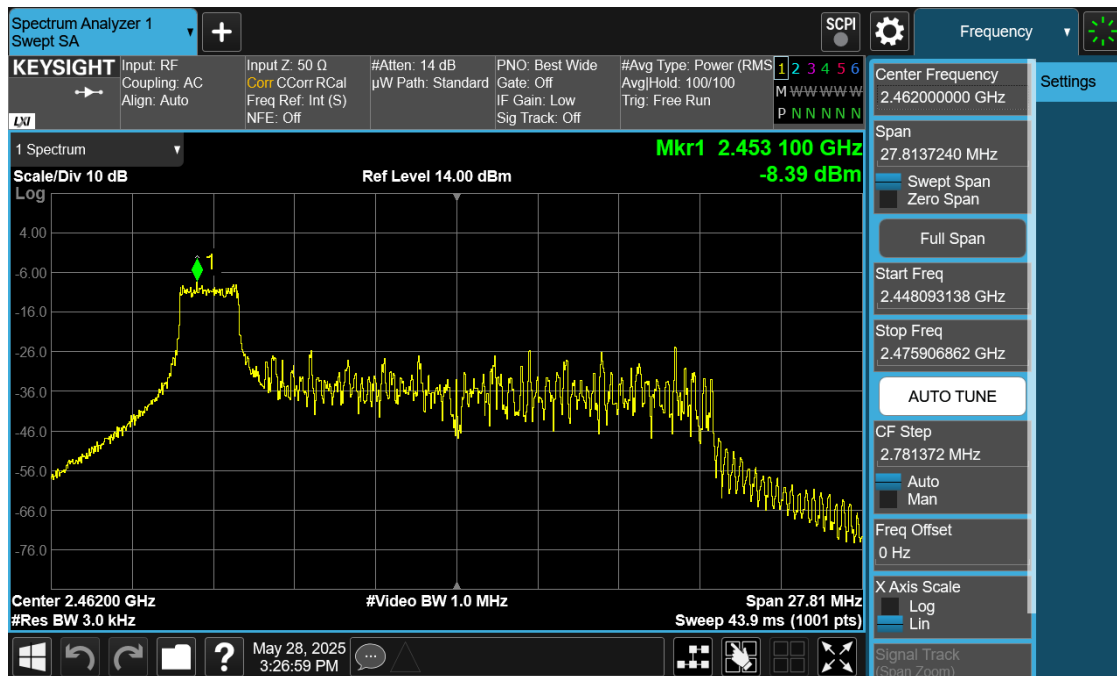

Plot 7-19. Power Spectral Density Plot Antenna 1 (Common) (802.11ax OFDMA – RU26 Index 8 – Ch. 11)

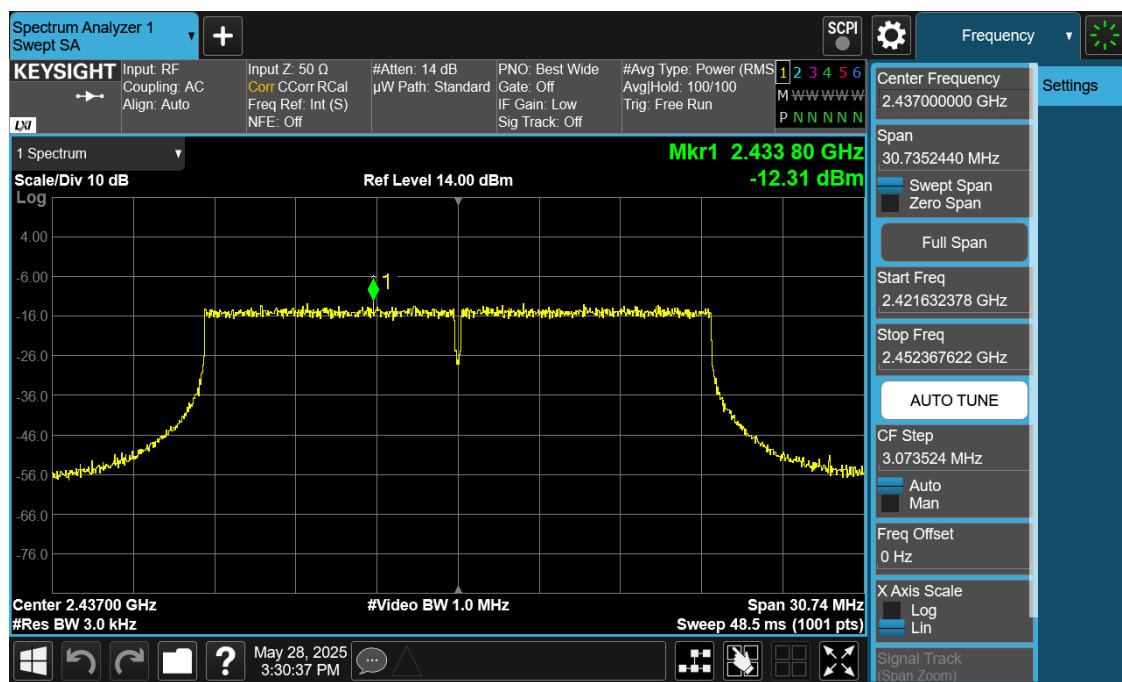

Plot 7-20. Power Spectral Density Plot Antenna 1 (Common) (802.11ax OFDMA – RU242 – Ch. 6)

|                                            |                                                                                     |                                                                                                                                                                                                                  |                                         |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|-----------------------------------|
| FCC ID: BCGA3300<br>IC: 579C-A3300         |  | Test Dates:<br>3/24/2025 - 11/26/2025                                                                                                                                                                            | EUT Type:<br>Smart Speaker with Display | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2503170028-05-R4.BCG |  | This report is Blockchain Verified. To verify the report authenticity, please visit <a href="https://www.blockchain-verified.com">https://www.blockchain-verified.com</a> or by clicking on the Blockchain logo. |                                         | Page 49 of 175                    |

### 7.5.3 CDD (Common) Power Spectral Density Measurements


| Frequency [MHz] | Channel No. | 802.11 MODE | RU Size | RU Index | Data Rate [Mbps] | Antenna 0 Common Power Density [dBm/MHz] | Antenna 1 Common Power Density [dBm/MHz] | Summed Power Density [dBm/MHz] | Max Power Density [dBm/MHz] | Margin [dB] | Pass/Fail |
|-----------------|-------------|-------------|---------|----------|------------------|------------------------------------------|------------------------------------------|--------------------------------|-----------------------------|-------------|-----------|
| 2412            | 1           | ax          | 26      | 0        | 20/23.5 (MCS9)   | -11.06                                   | -10.50                                   | -7.76                          | 8.0                         | -15.76      | Pass      |
|                 |             |             | 26      | 4        | 20/23.5 (MCS9)   | -9.91                                    | -9.71                                    | -6.80                          | 8.0                         | -14.80      | Pass      |
|                 |             |             | 26      | 8        | 20/23.5 (MCS9)   | -10.60                                   | -9.87                                    | -7.21                          | 8.0                         | -15.21      | Pass      |
| 2437            | 6           | ax          | 26      | 0        | 20/23.5 (MCS9)   | -11.12                                   | -9.80                                    | -7.40                          | 8.0                         | -15.40      | Pass      |
|                 |             |             | 26      | 4        | 20/23.5 (MCS9)   | -10.94                                   | -10.48                                   | -7.69                          | 8.0                         | -15.69      | Pass      |
|                 |             |             | 26      | 8        | 20/23.5 (MCS9)   | -11.58                                   | -9.91                                    | -7.65                          | 8.0                         | -15.65      | Pass      |
| 2462            | 11          | ax          | 26      | 0        | 20/23.5 (MCS9)   | -9.62                                    | -10.39                                   | -6.97                          | 8.0                         | -14.97      | Pass      |
|                 |             |             | 26      | 4        | 20/23.5 (MCS9)   | -10.76                                   | -10.55                                   | -7.64                          | 8.0                         | -15.64      | Pass      |
|                 |             |             | 26      | 8        | 20/23.5 (MCS9)   | -11.05                                   | -10.31                                   | -7.65                          | 8.0                         | -15.65      | Pass      |

**Table 7-46. CDD (Common) Conducted Power Density Measurements**


| Frequency [MHz] | Channel | 802.11 MODE | RU Size | RU Index | Data Rate [Mbps] | Antenna 0 Common Power Density [dBm/MHz] | Antenna 1 Common Power Density [dBm/MHz] | Summed Power Density [dBm/3kHz] | Max Power Density [dBm/3kHz] | Margin [dB] | Pass/Fail |
|-----------------|---------|-------------|---------|----------|------------------|------------------------------------------|------------------------------------------|---------------------------------|------------------------------|-------------|-----------|
| 2412            | 1       | ax          | 242     | 61       | 195/229.4 (MCS9) | -17.80                                   | -17.44                                   | -14.60                          | 8.0                          | -22.60      | Pass      |
| 2437            | 6       | ax          | 242     | 61       | 195/229.4 (MCS9) | -13.60                                   | -13.27                                   | -10.42                          | 8.0                          | -18.42      | Pass      |
| 2462            | 11      | ax          | 242     | 61       | 195/229.4 (MCS9) | -18.30                                   | -17.11                                   | -14.65                          | 8.0                          | -22.65      | Pass      |

**Table 7-47. CDD (Common) Conducted Power Density Measurements**

|                                                   |                                                                                     |                                                                                                                                                                                                                  |                                                |                                          |
|---------------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------|------------------------------------------|
| <b>FCC ID:</b> BCGA3300<br><b>IC:</b> 579C-A3300  |  | <b>Test Dates:</b><br>3/24/2025 - 11/26/2025                                                                                                                                                                     | <b>EUT Type:</b><br>Smart Speaker with Display | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1C2503170028-05-R4.BCG |  | This report is Blockchain Verified. To verify the report authenticity, please visit <a href="https://www.blockchain-verified.com">https://www.blockchain-verified.com</a> or by clicking on the Blockchain logo. |                                                | Page 50 of 175                           |

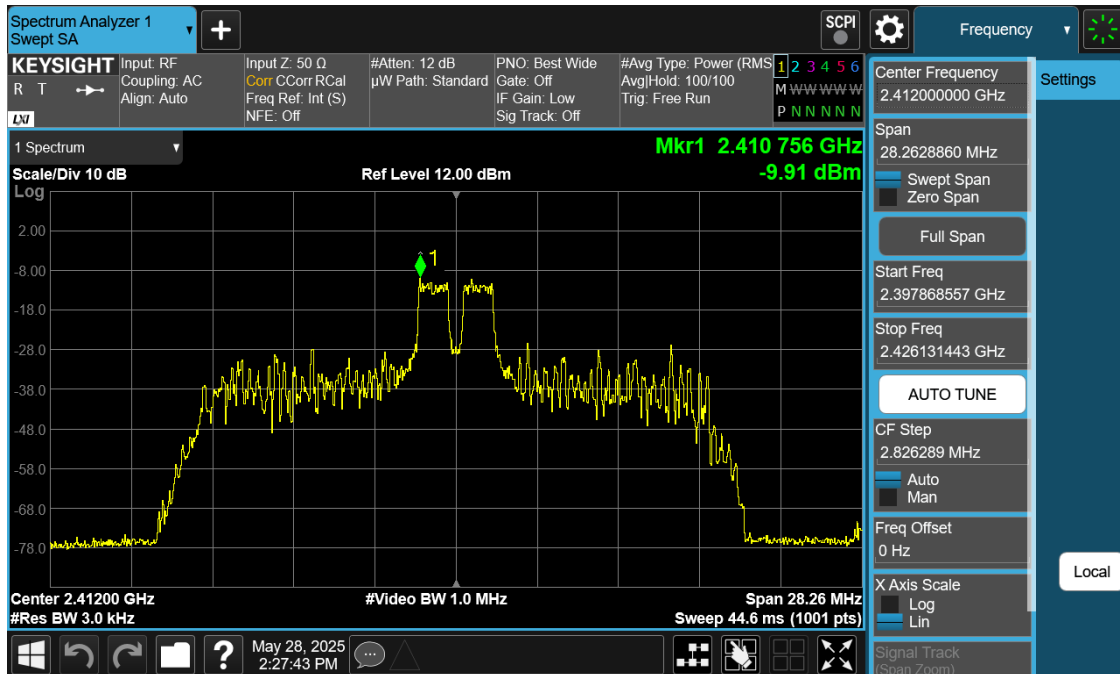


Plot 7-21. Power Spectral Density Plot Antenna 0 (802.11ax OFDMA – RU26 Index 4 – Ch. 1)

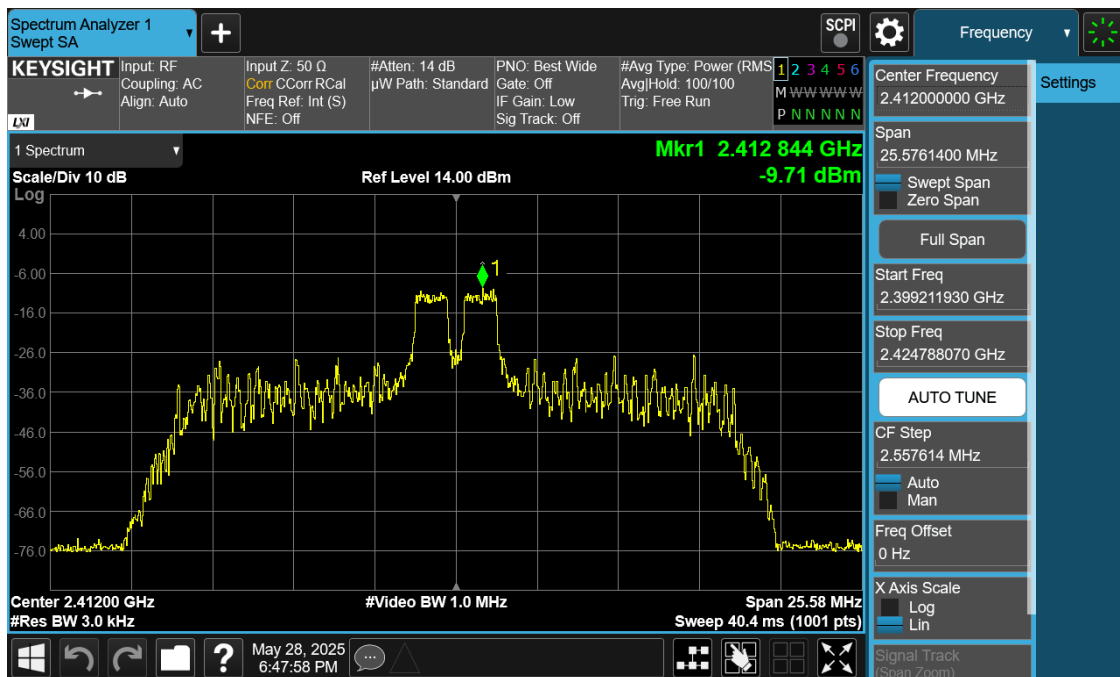


Plot 7-22. Power Spectral Density Plot Antenna 1 (802.11ax OFDMA – RU26 Index 4 – Ch. 1)

|                                            |                                                                                     |                                                                                                                                                                                                                  |                                         |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|-----------------------------------|
| FCC ID: BCGA3300<br>IC: 579C-A3300         |  | Test Dates:<br>3/24/2025 - 11/26/2025                                                                                                                                                                            | EUT Type:<br>Smart Speaker with Display | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2503170028-05-R4.BCG |  | This report is Blockchain Verified. To verify the report authenticity, please visit <a href="https://www.blockchain-verified.com">https://www.blockchain-verified.com</a> or by clicking on the Blockchain logo. |                                         | Page 51 of 175                    |

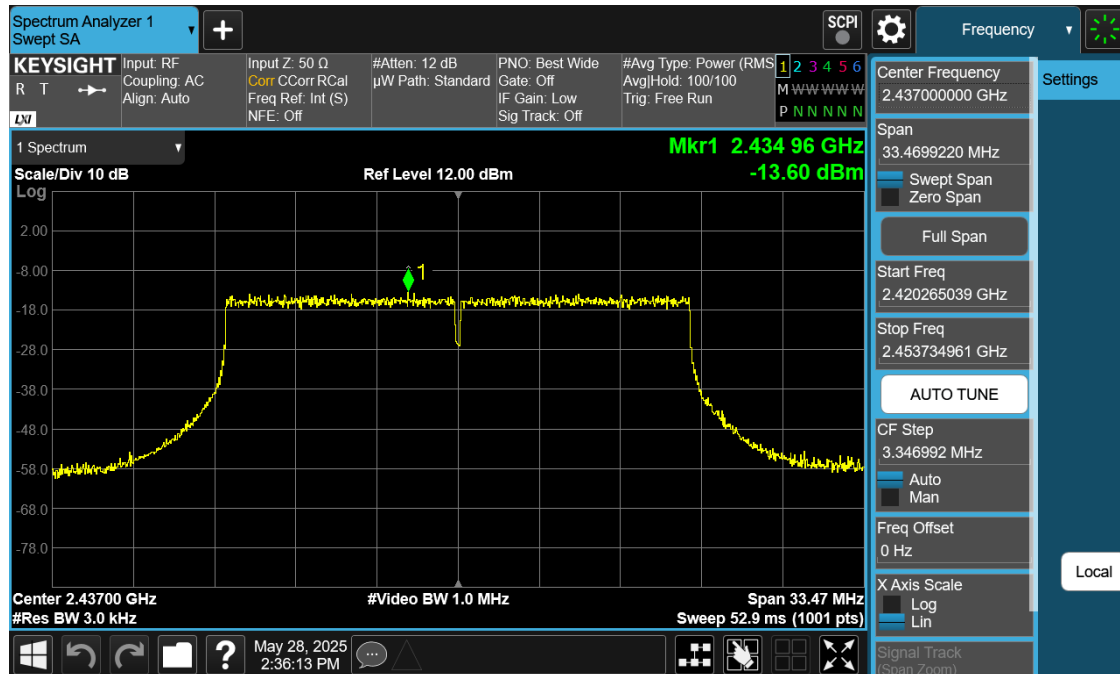

Plot 7-23. Power Spectral Density Plot Antenna 0 (802.11ax OFDMA – RU242 – Ch. 6)

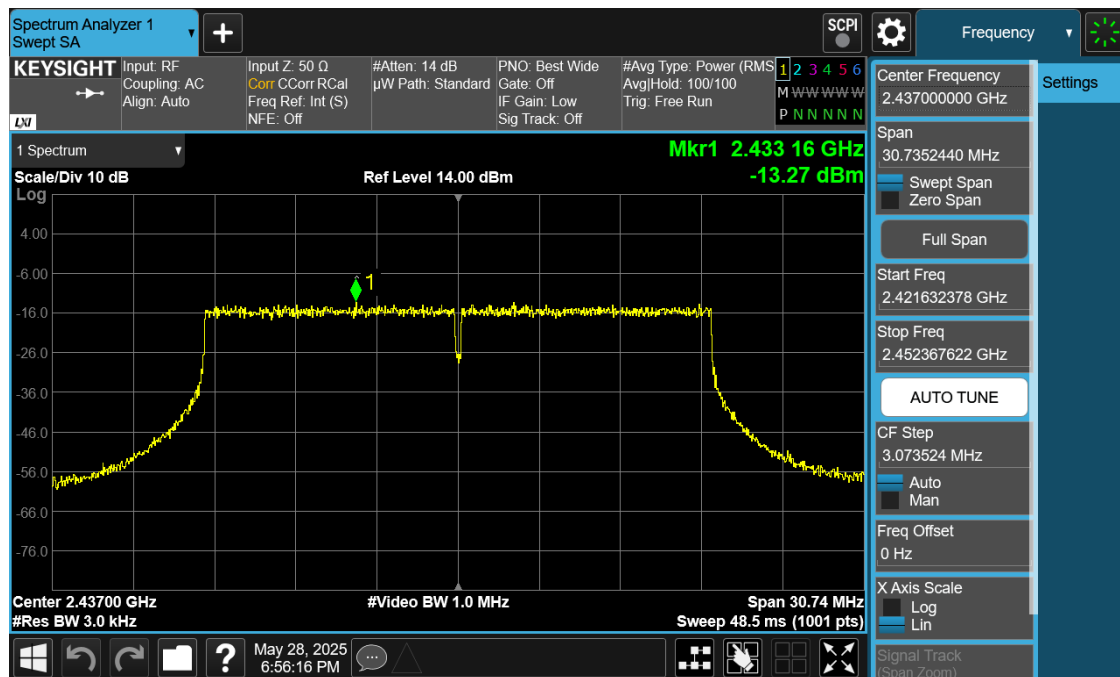

Plot 7-24. Power Spectral Density Plot Antenna 1 (802.11ax OFDMA – RU242 – Ch. 6)

|                                            |                                                                                     |                                                                                                                                                                                                                  |                                         |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|-----------------------------------|
| FCC ID: BCGA3300<br>IC: 579C-A3300         |  | Test Dates:<br>3/24/2025 - 11/26/2025                                                                                                                                                                            | EUT Type:<br>Smart Speaker with Display | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2503170028-05-R4.BCG |  | This report is Blockchain Verified. To verify the report authenticity, please visit <a href="https://www.blockchain-verified.com">https://www.blockchain-verified.com</a> or by clicking on the Blockchain logo. |                                         | Page 52 of 175                    |

## 7.5.4 Antenna 0 (Dedicated) Power Spectral Density Measurements



| Frequency [MHz] | Channel No. | 802.11 MODE | RU Size | RU Index | Data Rate [Mbps] | Measured Power Density [dBm/3kHz] | Max Power Density [dBm/3kHz] | Margin [dB] | Pass/Fail |
|-----------------|-------------|-------------|---------|----------|------------------|-----------------------------------|------------------------------|-------------|-----------|
| 2412            | 1           | ax          | 26      | 0        | 10/11.8 (MCS9)   | -7.70                             | 8.0                          | -15.70      | Pass      |
|                 |             |             | 26      | 4        | 10/11.8 (MCS9)   | -7.19                             | 8.0                          | -15.19      | Pass      |
|                 |             |             | 26      | 8        | 10/11.8 (MCS9)   | -6.90                             | 8.0                          | -14.90      | Pass      |
| 2437            | 6           | ax          | 26      | 0        | 10/11.8 (MCS9)   | -6.84                             | 8.0                          | -14.84      | Pass      |
|                 |             |             | 26      | 4        | 10/11.8 (MCS9)   | -7.12                             | 8.0                          | -15.12      | Pass      |
|                 |             |             | 26      | 8        | 10/11.8 (MCS9)   | -6.71                             | 8.0                          | -14.71      | Pass      |
| 2462            | 11          | ax          | 26      | 0        | 10/11.8 (MCS9)   | -6.67                             | 8.0                          | -14.67      | Pass      |
|                 |             |             | 26      | 4        | 10/11.8 (MCS9)   | -7.37                             | 8.0                          | -15.37      | Pass      |
|                 |             |             | 26      | 8        | 10/11.8 (MCS9)   | -7.75                             | 8.0                          | -15.75      | Pass      |

**Table 7-48. Conducted Power Density Measurements Antenna 0 (Dedicated) – RU26**

| Frequency [MHz] | Channel | 802.11 MODE | RU Size | RU Index | Data Rate [Mbps]  | Measured Power Density [dBm/3kHz] | Max Power Density [dBm/3kHz] | Margin [dB] | Pass/Fail |
|-----------------|---------|-------------|---------|----------|-------------------|-----------------------------------|------------------------------|-------------|-----------|
| 2412            | 1       | ax (20MHz)  | 242     | 61       | 97.5/114.7 (MCS9) | -13.18                            | 8.0                          | -21.18      | Pass      |
| 2437            | 6       | ax (20MHz)  | 242     | 61       | 97.5/114.7 (MCS9) | -10.08                            | 8.0                          | -18.08      | Pass      |
| 2462            | 11      | ax (20MHz)  | 242     | 61       | 97.5/114.7 (MCS9) | -14.98                            | 8.0                          | -22.98      | Pass      |

**Table 7-49. Conducted Power Density Measurements Antenna 0 (Dedicated) – RU242**

|                                                   |                                                                                     |                                                                                                                                                                                                                  |                                                |                                          |
|---------------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------|------------------------------------------|
| <b>FCC ID:</b> BCGA3300<br><b>IC:</b> 579C-A3300  |  | <b>Test Dates:</b><br>3/24/2025 - 11/26/2025                                                                                                                                                                     | <b>EUT Type:</b><br>Smart Speaker with Display | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1C2503170028-05-R4.BCG |  | This report is Blockchain Verified. To verify the report authenticity, please visit <a href="https://www.blockchain-verified.com">https://www.blockchain-verified.com</a> or by clicking on the Blockchain logo. |                                                | Page 53 of 175                           |

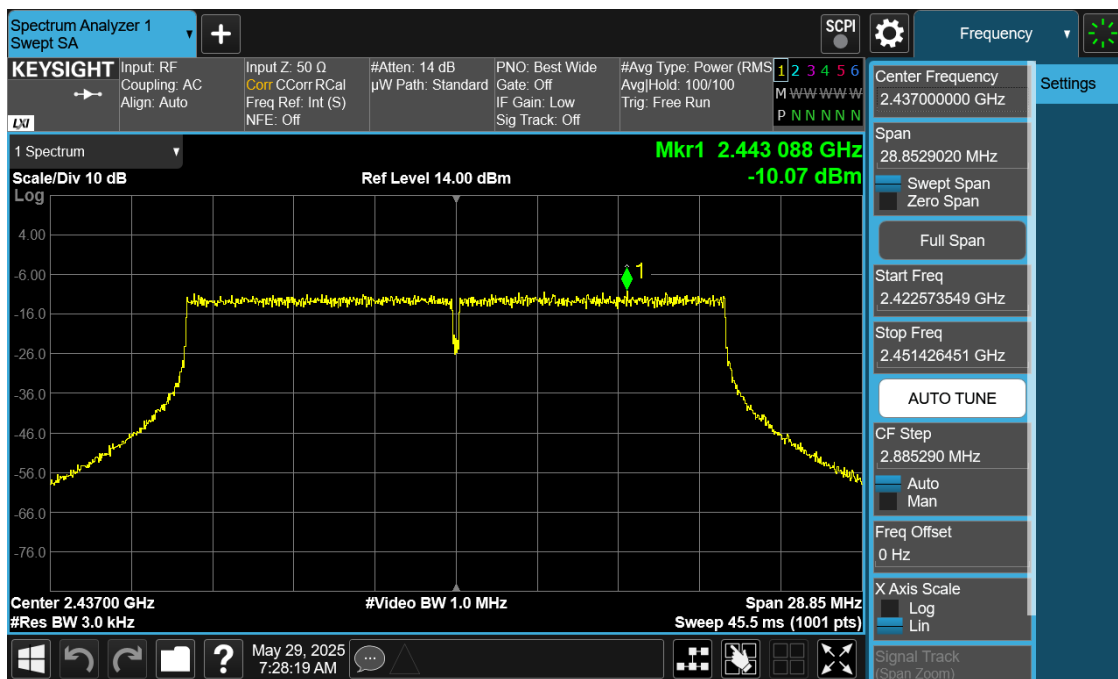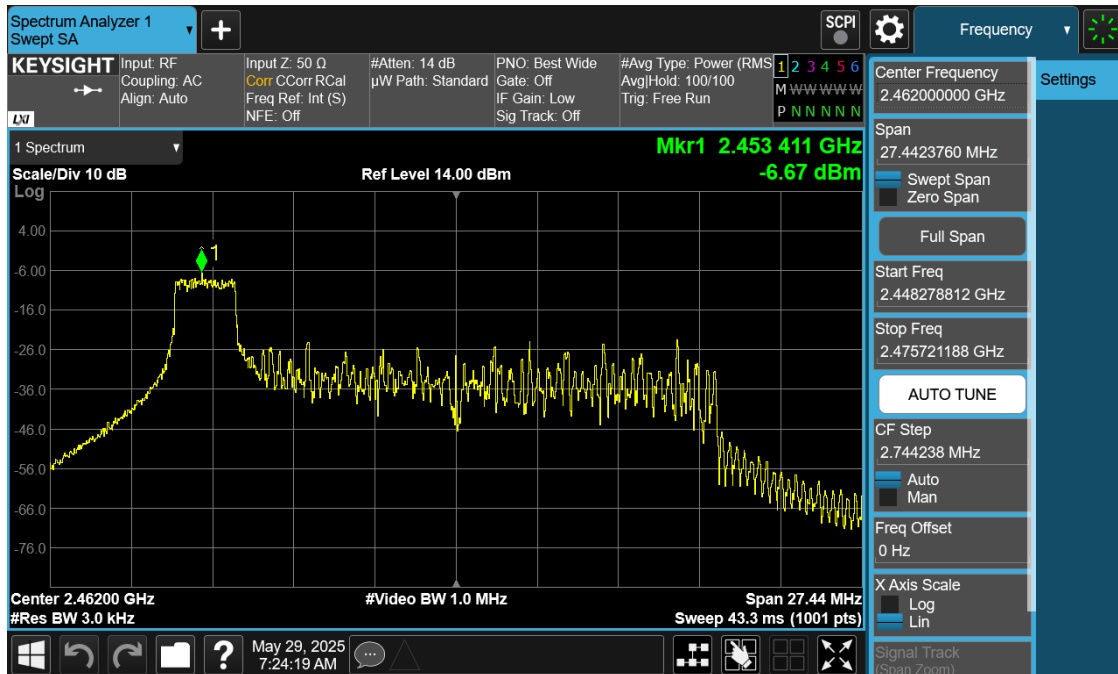

|                                            |                                                                                     |                                                                                                                                                                                                                  |                                         |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|-----------------------------------|
| FCC ID: BCGA3300<br>IC: 579C-A3300         |  | Test Dates:<br>3/24/2025 - 11/26/2025                                                                                                                                                                            | EUT Type:<br>Smart Speaker with Display | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2503170028-05-R4.BCG |  | This report is Blockchain Verified. To verify the report authenticity, please visit <a href="https://www.blockchain-verified.com">https://www.blockchain-verified.com</a> or by clicking on the Blockchain logo. |                                         | Page 54 of 175                    |

## 7.5.5 Antenna 1 (Dedicated) Power Spectral Density Measurements


| Frequency [MHz] | Channel No. | 802.11 MODE | RU Size | RU Index | Data Rate [Mbps] | Measured Power Density [dBm/3kHz] | Max Power Density [dBm/3kHz] | Margin [dB] | Pass/Fail |
|-----------------|-------------|-------------|---------|----------|------------------|-----------------------------------|------------------------------|-------------|-----------|
| 2412            | 1           | ax          | 26      | 0        | 10/11.8 (MCS9)   | -6.42                             | 8.0                          | -14.42      | Pass      |
|                 |             |             | 26      | 4        | 10/11.8 (MCS9)   | -7.22                             | 8.0                          | -15.22      | Pass      |
|                 |             |             | 26      | 8        | 10/11.8 (MCS9)   | -6.95                             | 8.0                          | -14.95      | Pass      |
| 2437            | 6           | ax          | 26      | 0        | 10/11.8 (MCS9)   | -6.36                             | 8.0                          | -14.36      | Pass      |
|                 |             |             | 26      | 4        | 10/11.8 (MCS9)   | -6.99                             | 8.0                          | -14.99      | Pass      |
|                 |             |             | 26      | 8        | 10/11.8 (MCS9)   | -6.24                             | 8.0                          | -14.24      | Pass      |
| 2462            | 11          | ax          | 26      | 0        | 10/11.8 (MCS9)   | -6.32                             | 8.0                          | -14.32      | Pass      |
|                 |             |             | 26      | 4        | 10/11.8 (MCS9)   | -6.95                             | 8.0                          | -14.95      | Pass      |
|                 |             |             | 26      | 8        | 10/11.8 (MCS9)   | -7.26                             | 8.0                          | -15.26      | Pass      |

**Table 7-50. Conducted Power Density Measurements Antenna 1 (Dedicated) – RU26**


| Frequency [MHz] | Channel | 802.11 MODE | RU Size | RU Index | Data Rate [Mbps]  | Measured Power Density [dBm/3kHz] | Max Power Density [dBm/3kHz] | Margin [dB] | Pass/Fail |
|-----------------|---------|-------------|---------|----------|-------------------|-----------------------------------|------------------------------|-------------|-----------|
| 2412            | 1       | ax (20MHz)  | 242     | 61       | 97.5/114.7 (MCS9) | -13.85                            | 8.0                          | -21.85      | Pass      |
| 2437            | 6       | ax (20MHz)  | 242     | 61       | 97.5/114.7 (MCS9) | -11.17                            | 8.0                          | -19.17      | Pass      |
| 2462            | 11      | ax (20MHz)  | 242     | 61       | 97.5/114.7 (MCS9) | -15.01                            | 8.0                          | -23.01      | Pass      |

**Table 7-51. Conducted Power Density Measurements Antenna 1 (Dedicated) – RU242**

|                                                   |                                                                                     |                                                                                                                                                                                                                  |                                                |                                          |
|---------------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------|------------------------------------------|
| <b>FCC ID:</b> BCGA3300<br><b>IC:</b> 579C-A3300  |  | <b>Test Dates:</b><br>3/24/2025 - 11/26/2025                                                                                                                                                                     | <b>EUT Type:</b><br>Smart Speaker with Display | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1C2503170028-05-R4.BCG |  | This report is Blockchain Verified. To verify the report authenticity, please visit <a href="https://www.blockchain-verified.com">https://www.blockchain-verified.com</a> or by clicking on the Blockchain logo. |                                                | Page 55 of 175                           |

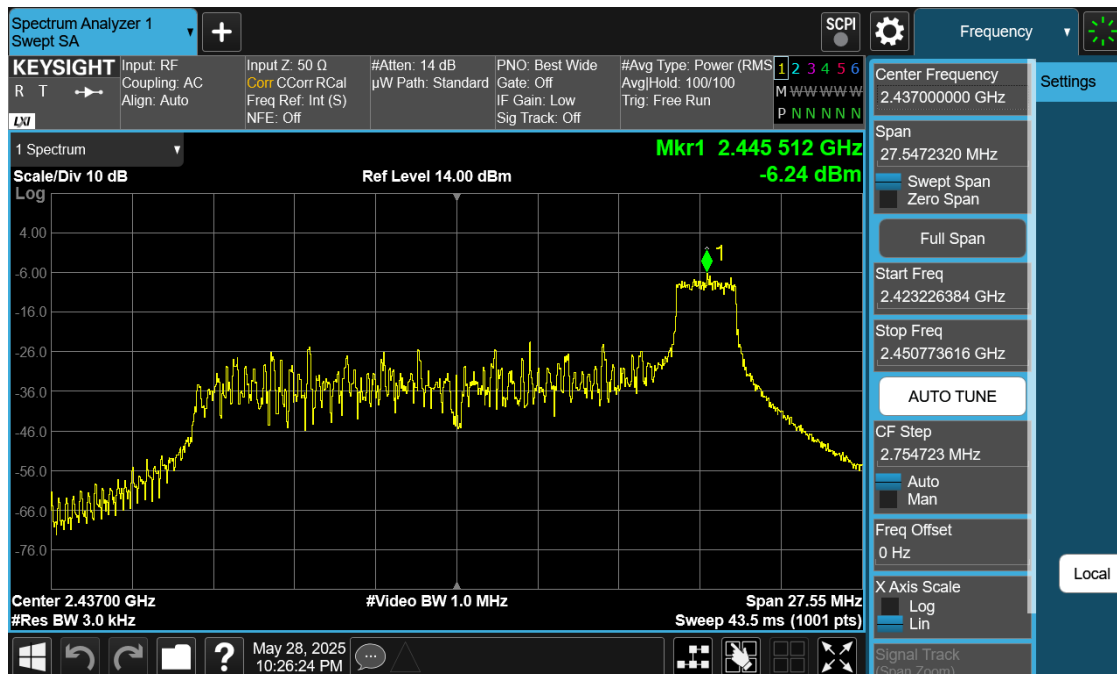

Plot 7-27. Power Spectral Density Plot Antenna 1 (Dedicated) (802.11ax OFDMA – RU26 Index 8 – Ch. 6)

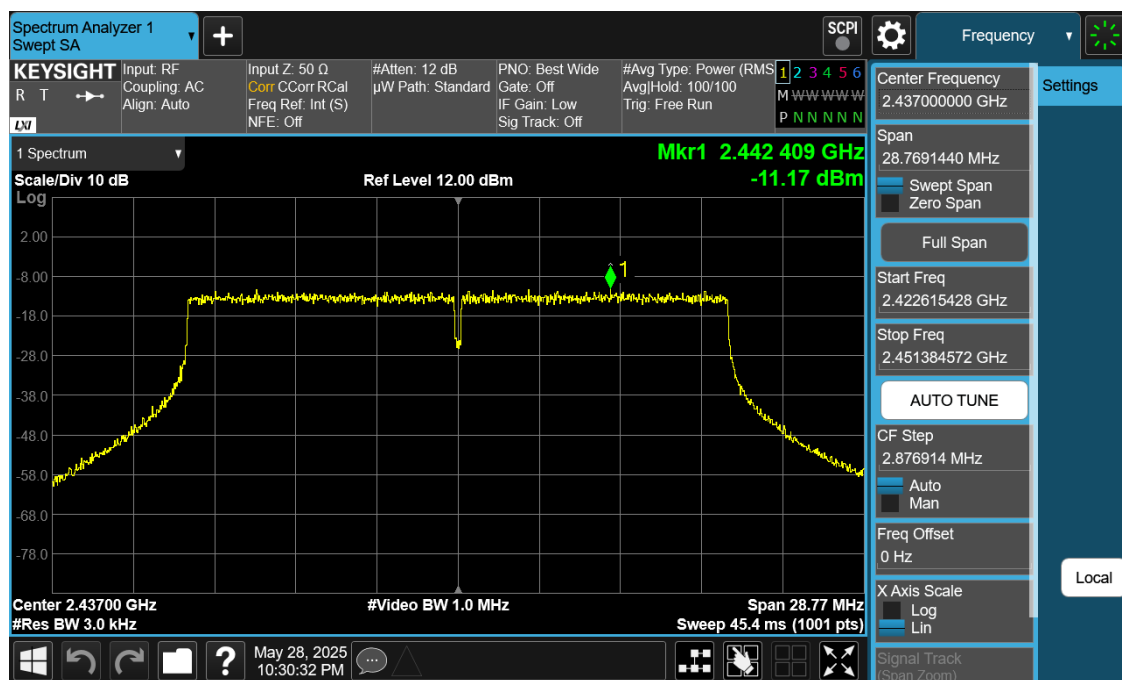

Plot 7-28. Power Spectral Density Plot Antenna 1 (Dedicated) (802.11ax OFDMA – RU242 – Ch. 6)

|                                            |                                                                                     |                                                                                                                                                                                                                  |                                         |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|-----------------------------------|
| FCC ID: BCGA3300<br>IC: 579C-A3300         |  | Test Dates:<br>3/24/2025 - 11/26/2025                                                                                                                                                                            | EUT Type:<br>Smart Speaker with Display | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2503170028-05-R4.BCG |  | This report is Blockchain Verified. To verify the report authenticity, please visit <a href="https://www.blockchain-verified.com">https://www.blockchain-verified.com</a> or by clicking on the Blockchain logo. |                                         | Page 56 of 175                    |

## 7.5.6 CDD (Dedicated) Power Spectral Density Measurements


| Frequency [MHz] | Channel No. | 802.11 MODE | RU Size | RU Index | Data Rate [Mbps] | Antenna 0 Dedicated Power Density [dBm/MHz] | Antenna 1 Dedicated Power Density [dBm/MHz] | Summed Power Density [dBm/3kHz] | Max Power Density [dBm/3kHz] | Margin [dB] | Pass/Fail |
|-----------------|-------------|-------------|---------|----------|------------------|---------------------------------------------|---------------------------------------------|---------------------------------|------------------------------|-------------|-----------|
| 2412            | 1           | ax          | 26      | 0        | 20/23.5 (MCS9)   | -8.01                                       | -8.28                                       | -5.13                           | 8.0                          | -13.13      | Pass      |
|                 |             |             | 26      | 4        | 20/23.5 (MCS9)   | -8.70                                       | -7.57                                       | -5.09                           | 8.0                          | -13.09      | Pass      |
|                 |             |             | 26      | 8        | 20/23.5 (MCS9)   | -8.27                                       | -7.95                                       | -5.10                           | 8.0                          | -13.10      | Pass      |
| 2437            | 6           | ax          | 26      | 0        | 20/23.5 (MCS9)   | -7.85                                       | -8.07                                       | -4.94                           | 8.0                          | -12.94      | Pass      |
|                 |             |             | 26      | 4        | 20/23.5 (MCS9)   | -8.40                                       | -7.54                                       | -4.94                           | 8.0                          | -12.94      | Pass      |
|                 |             |             | 26      | 8        | 20/23.5 (MCS9)   | -8.39                                       | -8.44                                       | -5.40                           | 8.0                          | -13.40      | Pass      |
| 2462            | 11          | ax          | 26      | 0        | 20/23.5 (MCS9)   | -7.97                                       | -8.52                                       | -5.22                           | 8.0                          | -13.22      | Pass      |
|                 |             |             | 26      | 4        | 20/23.5 (MCS9)   | -8.16                                       | -8.46                                       | -5.30                           | 8.0                          | -13.30      | Pass      |
|                 |             |             | 26      | 8        | 20/23.5 (MCS9)   | -8.76                                       | -8.25                                       | -5.49                           | 8.0                          | -13.49      | Pass      |

Table 7-52. CDD (Dedicated) Conducted Power Density Measurements


| Frequency [MHz] | Channel | 802.11 MODE | RU Size | RU Index | Data Rate [Mbps] | Antenna 0 Dedicated Power Density [dBm/MHz] | Antenna 1 Dedicated Power Density [dBm/MHz] | Summed Power Density [dBm/3kHz] | Max Power Density [dBm/3kHz] | Margin [dB] | Pass/Fail |
|-----------------|---------|-------------|---------|----------|------------------|---------------------------------------------|---------------------------------------------|---------------------------------|------------------------------|-------------|-----------|
| 2412            | 1       | ax          | 242     | 61       | 195/229.4 (MCS9) | -14.41                                      | -15.18                                      | -11.77                          | 8.0                          | -19.77      | Pass      |
| 2437            | 6       | ax          | 242     | 61       | 195/229.4 (MCS9) | -10.53                                      | -11.54                                      | -7.99                           | 8.0                          | -15.99      | Pass      |
| 2462            | 11      | ax          | 242     | 61       | 195/229.4 (MCS9) | -14.61                                      | -14.50                                      | -11.55                          | 8.0                          | -19.55      | Pass      |

Table 7-53. CDD (Dedicated) Conducted Power Density Measurements

|                                            |                                                                                     |                                                                                                                                                                                                                  |                                         |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|-----------------------------------|
| FCC ID: BCGA3300<br>IC: 579C-A3300         |  | Test Dates:<br>3/24/2025 - 11/26/2025                                                                                                                                                                            | EUT Type:<br>Smart Speaker with Display | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2503170028-05-R4.BCG |  | This report is Blockchain Verified. To verify the report authenticity, please visit <a href="https://www.blockchain-verified.com">https://www.blockchain-verified.com</a> or by clicking on the Blockchain logo. |                                         | Page 57 of 175                    |

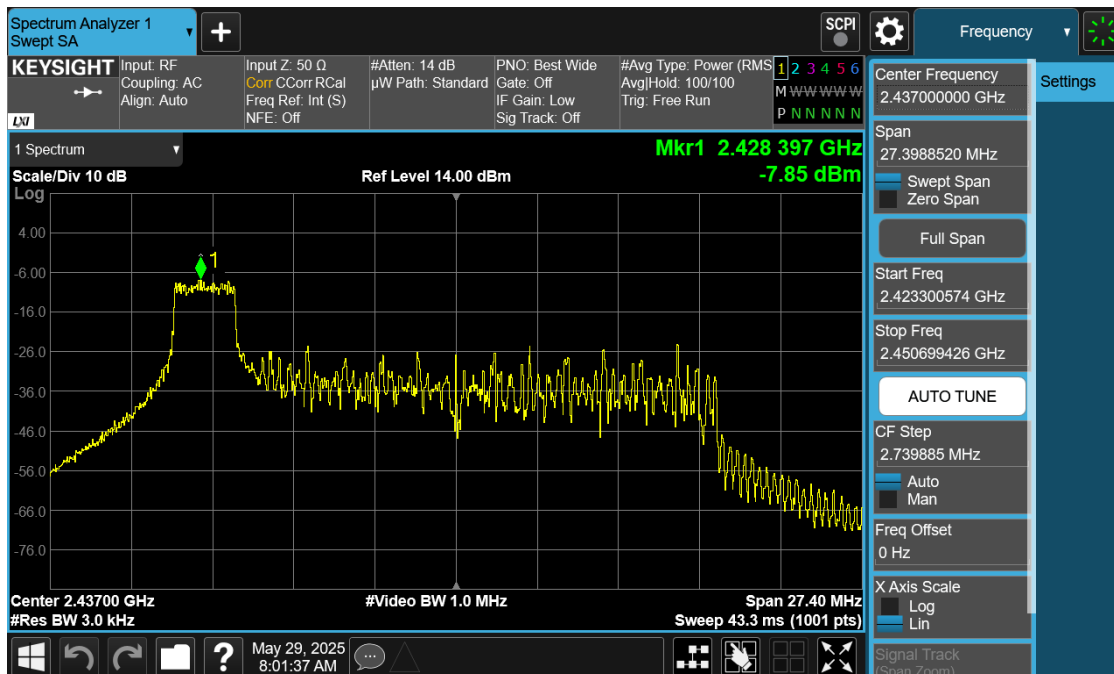


Plot 7-29. Power Spectral Density Plot Antenna 0 Dedicated (802.11ax OFDMA – RU26 Index 0 – Ch. 6)

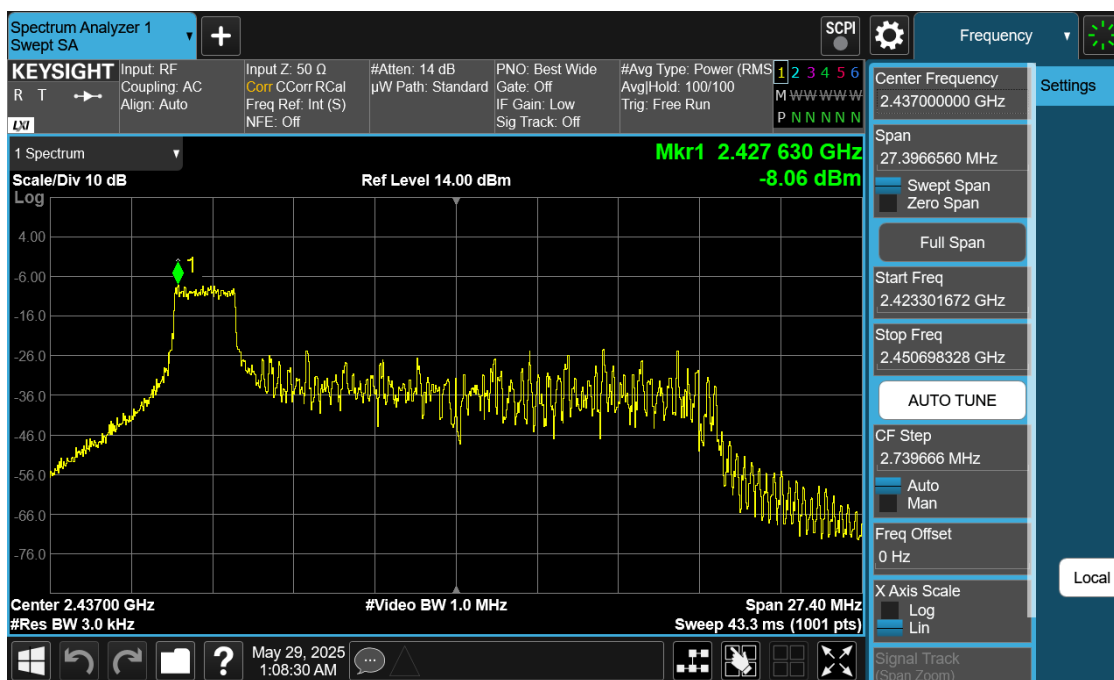


Plot 7-30. Power Spectral Density Plot Antenna 1 Dedicated (802.11ax OFDMA – RU26 Index 0 – Ch. 6)

|                                            |                                                                                     |                                                                                                                                                                                                                  |                                         |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|-----------------------------------|
| FCC ID: BCGA3300<br>IC: 579C-A3300         |  | Test Dates:<br>3/24/2025 - 11/26/2025                                                                                                                                                                            | EUT Type:<br>Smart Speaker with Display | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2503170028-05-R4.BCG |  | This report is Blockchain Verified. To verify the report authenticity, please visit <a href="https://www.blockchain-verified.com">https://www.blockchain-verified.com</a> or by clicking on the Blockchain logo. |                                         | Page 58 of 175                    |

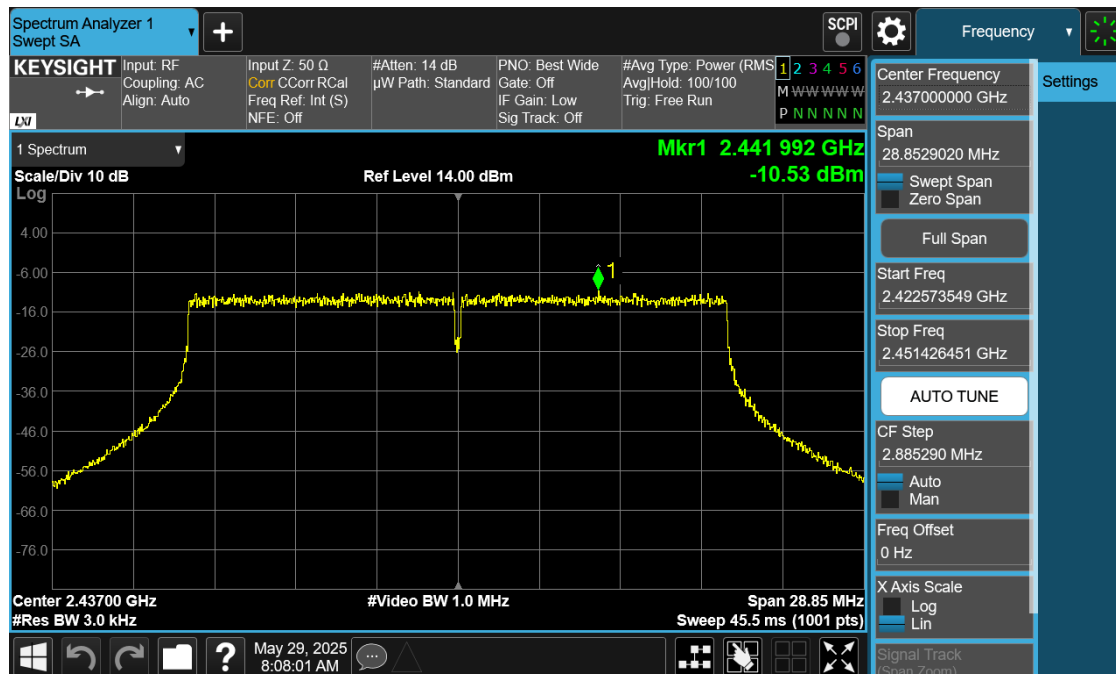

Plot 7-31. Power Spectral Density Plot Antenna 0 Dedicated (802.11ax OFDMA – RU242 – Ch. 6)

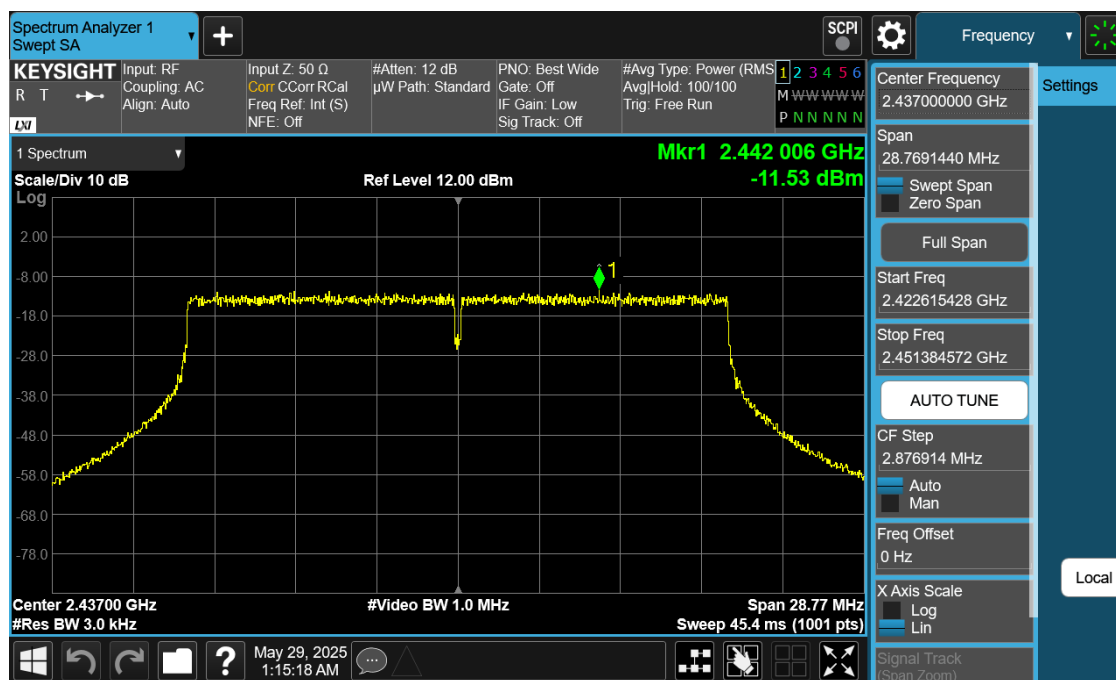

Plot 7-32. Power Spectral Density Plot Antenna 1 Dedicated (802.11ax OFDMA – RU242 – Ch. 6)

|                                            |                                                                                     |                                                                                                                                                                                                                  |                                         |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|-----------------------------------|
| FCC ID: BCGA3300<br>IC: 579C-A3300         |  | Test Dates:<br>3/24/2025 - 11/26/2025                                                                                                                                                                            | EUT Type:<br>Smart Speaker with Display | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2503170028-05-R4.BCG |  | This report is Blockchain Verified. To verify the report authenticity, please visit <a href="https://www.blockchain-verified.com">https://www.blockchain-verified.com</a> or by clicking on the Blockchain logo. |                                         | Page 59 of 175                    |

**Note:**

Per ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 Subclause 14.6.3, the directional gain is calculated using the following formula, where  $G_N$  is the gain of the nth antenna and  $N_{ANT}$ , the total number of antennas used.

$$\text{Directional gain} = 10 \log [(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{ANT}] \text{ dBi}$$

Per ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 Section 14.5.2.2 and KDB 662911 D01 v02r01 Section E)2), the power spectral density at Antenna 3a and Antenna 3 were first measured separately as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

**Sample CDD Dedicated Calculation:**

At 2412MHz the average conducted power spectral density was measured to be -8.70 dBm for Antenna 0 Dedicated and -7.57 dBm for Antenna 1 Dedicated.

$$\text{Antenna 0} + \text{Antenna 1} = \text{CDD Dedicated}$$

$$((-8.70 \text{ dBm}) + (-7.57 \text{ dBm})) = (0.135 \text{ mW} + 0.175 \text{ mW}) = 0.31 \text{ mW} = -5.09 \text{ dBm}$$

|                                                   |                                                                                     |                                                                                                                                                                                                                  |                                                |                                          |
|---------------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------|------------------------------------------|
| <b>FCC ID:</b> BCGA3300<br><b>IC:</b> 579C-A3300  |  | <b>Test Dates:</b><br>3/24/2025 - 11/26/2025                                                                                                                                                                     | <b>EUT Type:</b><br>Smart Speaker with Display | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1C2503170028-05-R4.BCG |  | This report is Blockchain Verified. To verify the report authenticity, please visit <a href="https://www.blockchain-verified.com">https://www.blockchain-verified.com</a> or by clicking on the Blockchain logo. |                                                | Page 60 of 175                           |

## 7.6 Conducted Authorized Band Edge

### Test Overview and Limit

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates, tone configurations, and RU indices were investigated to determine the worst case configuration. For the following out of band conducted emissions plots at the band edge, the EUT was set to a data rate of MCS9 in 802.11ax-RU mode as this setting produced the worst-case emissions.

***The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the PSD procedure (Section 7.5).***

### Test Procedure Used

ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 – Subclause 11.11.3  
KDB 558074 D01 v05r02 – Section 8.7.2

### Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW = 100kHz
4. VBW  $\geq 3 \times$  RBW
5. Detector = Peak
6. Number of sweep points  $\geq 2 \times$  Span/RBW
7. Trace mode = max hold
8. Sweep time = auto couple
9. The trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




**Figure 7-5. Test Instrument & Measurement Setup**

### Test Notes


1. All antenna configurations and data rates were investigated and only the worst case are reported.
2. All RU's were investigated and only worst case partially-loaded and fully-loaded RU's are reported.

|                                            |                                                                                     |                                                                                                                                                                                                                  |                                         |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|-----------------------------------|
| FCC ID: BCGA3300<br>IC: 579C-A3300         |  | Test Dates:<br>3/24/2025 - 11/26/2025                                                                                                                                                                            | EUT Type:<br>Smart Speaker with Display | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2503170028-05-R4.BCG |  | This report is Blockchain Verified. To verify the report authenticity, please visit <a href="https://www.blockchain-verified.com">https://www.blockchain-verified.com</a> or by clicking on the Blockchain logo. |                                         | Page 61 of 175                    |

## 7.6.1 Antenna 0 (Common) Conducted Emissions at the Band Edge

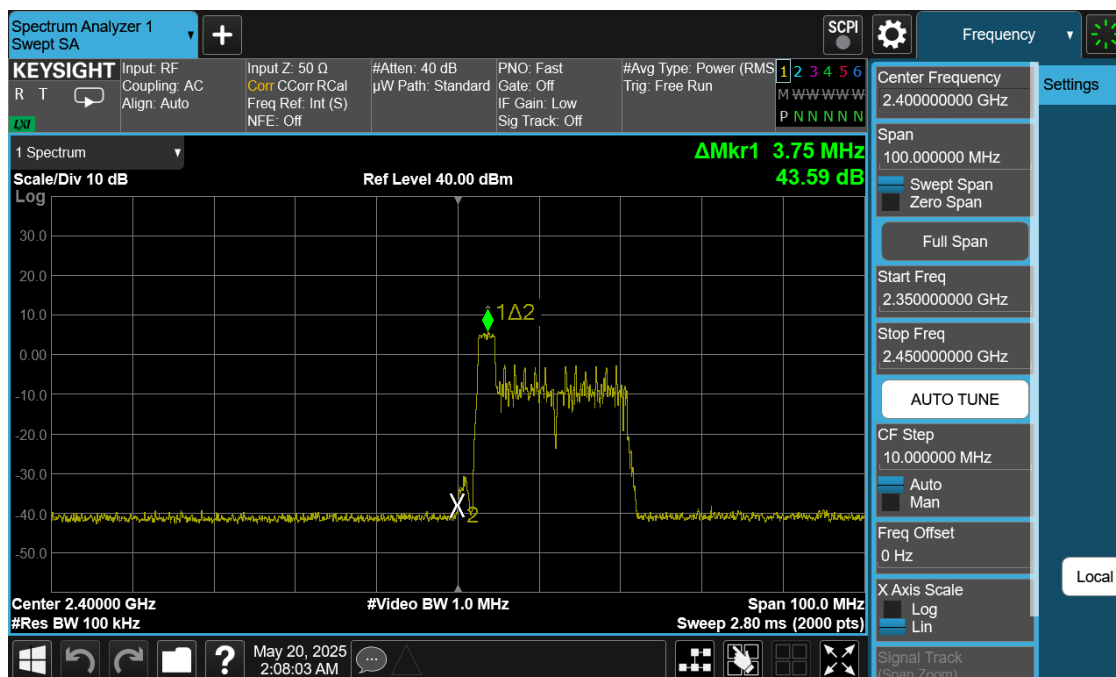



Plot 7-33. Band Edge Antenna 0 (Common) (802.11ax OFDMA – RU26 Index 0 – Ch. 1)

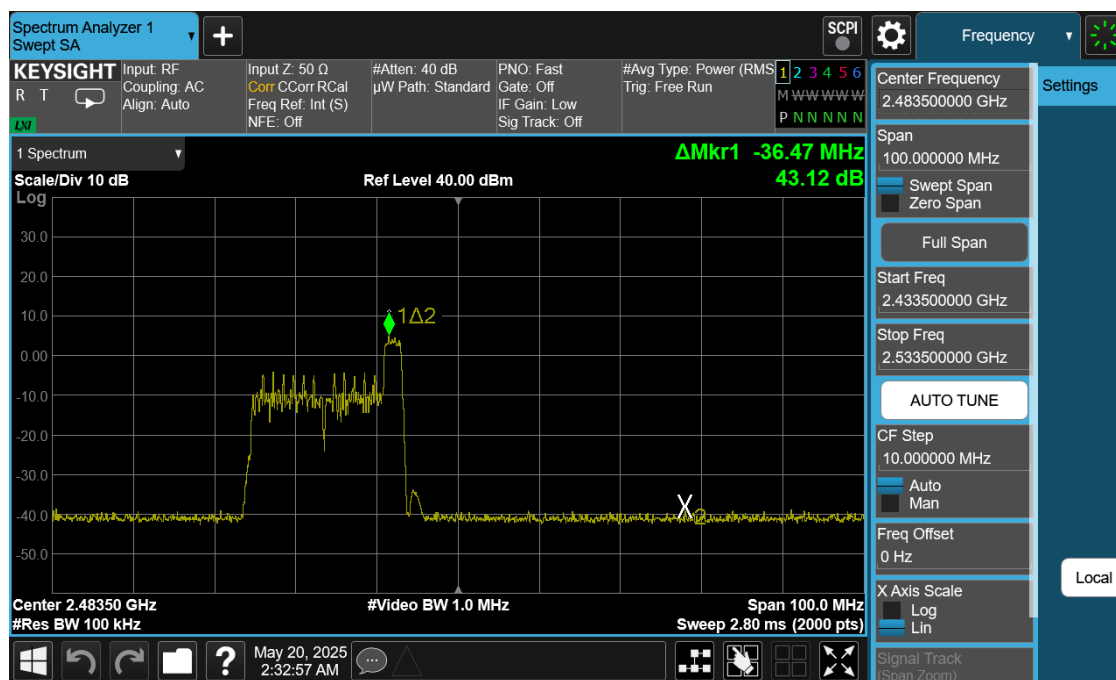


Plot 7-34. Band Edge Antenna 0 (Common) (802.11ax OFDMA – RU26 Index 8 – Ch. 12)

|                                            |                                                                                     |                                                                                                                                                                                                                  |                                         |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|-----------------------------------|
| FCC ID: BCGA3300<br>IC: 579C-A3300         |  | Test Dates:<br>3/24/2025 - 11/26/2025                                                                                                                                                                            | EUT Type:<br>Smart Speaker with Display | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2503170028-05-R4.BCG |  | This report is Blockchain Verified. To verify the report authenticity, please visit <a href="https://www.blockchain-verified.com">https://www.blockchain-verified.com</a> or by clicking on the Blockchain logo. |                                         | Page 62 of 175                    |


V 12.0 03/03/2026

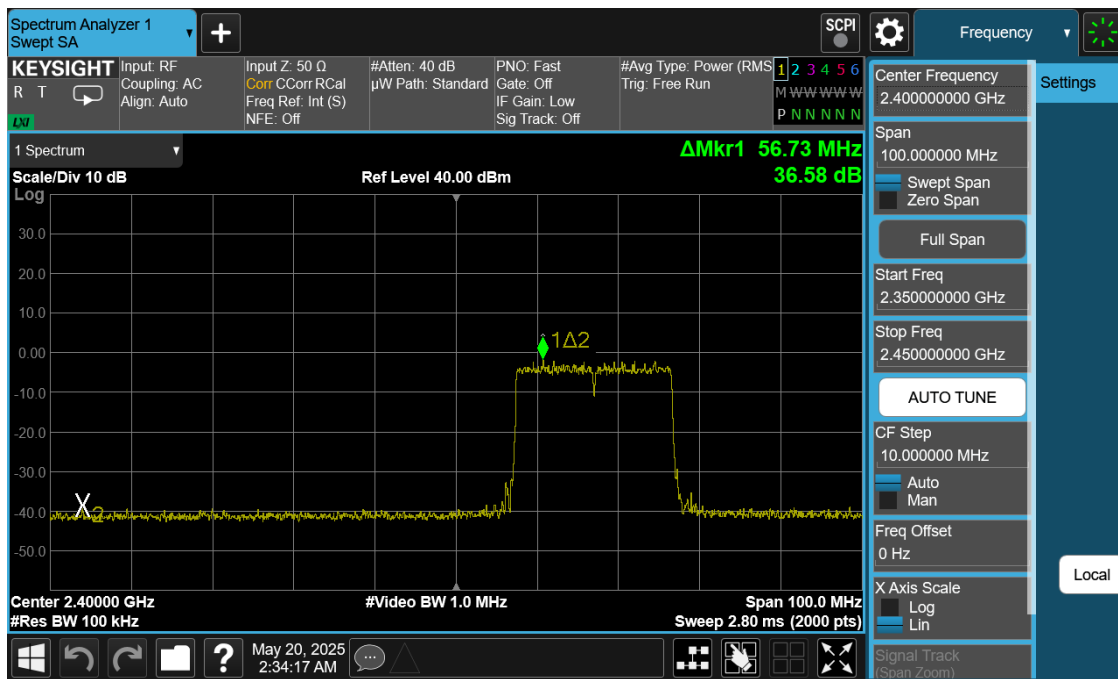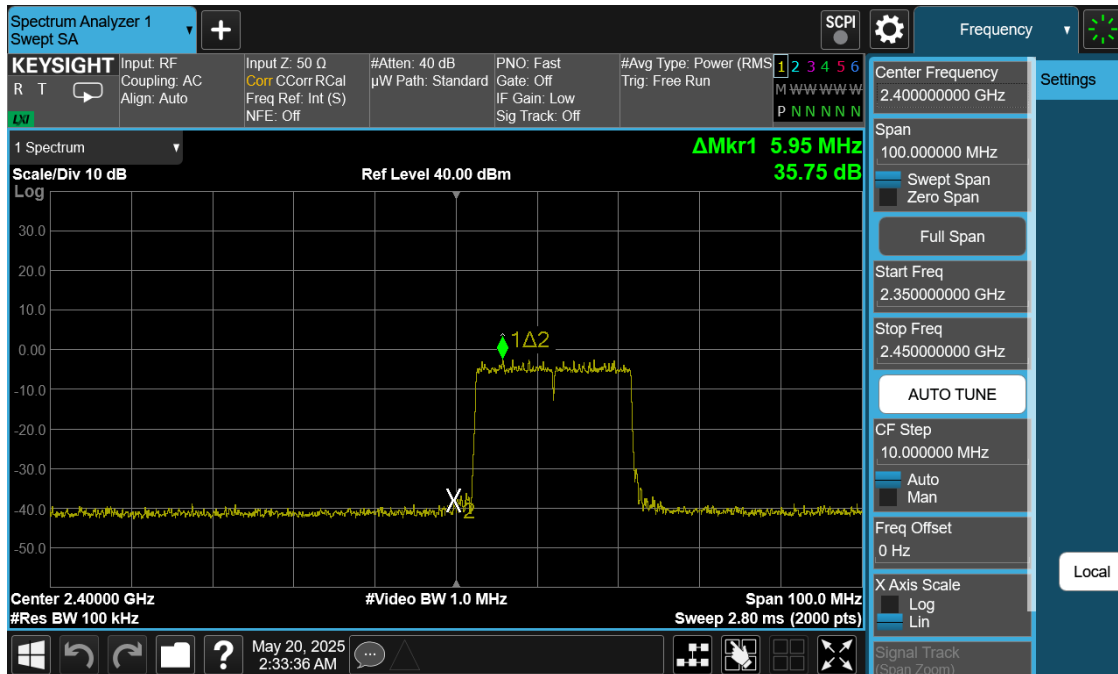

|                                                   |                                                                                     |                                                                                                                                                                                                                  |                                                |                                          |
|---------------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------|------------------------------------------|
| <b>FCC ID:</b> BCGA3300<br><b>IC:</b> 579C-A3300  |  | <b>Test Dates:</b><br>3/24/2025 - 11/26/2025                                                                                                                                                                     | <b>EUT Type:</b><br>Smart Speaker with Display | <b>Approved by:</b><br>Technical Manager |
| <b>Test Report S/N:</b><br>1C2503170028-05-R4.BCG |  | This report is Blockchain Verified. To verify the report authenticity, please visit <a href="https://www.blockchain-verified.com">https://www.blockchain-verified.com</a> or by clicking on the Blockchain logo. |                                                |                                          |

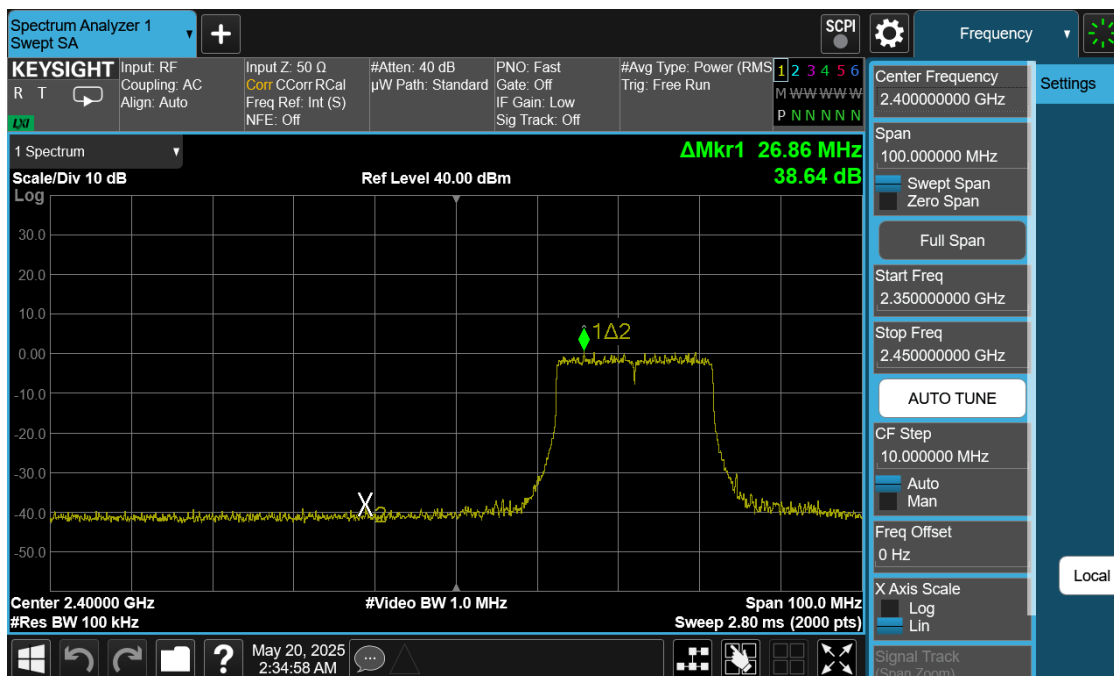


Plot 7-37. Band Edge Antenna 0 (Common) (802.11ax OFDMA – RU242 – Ch. 3)

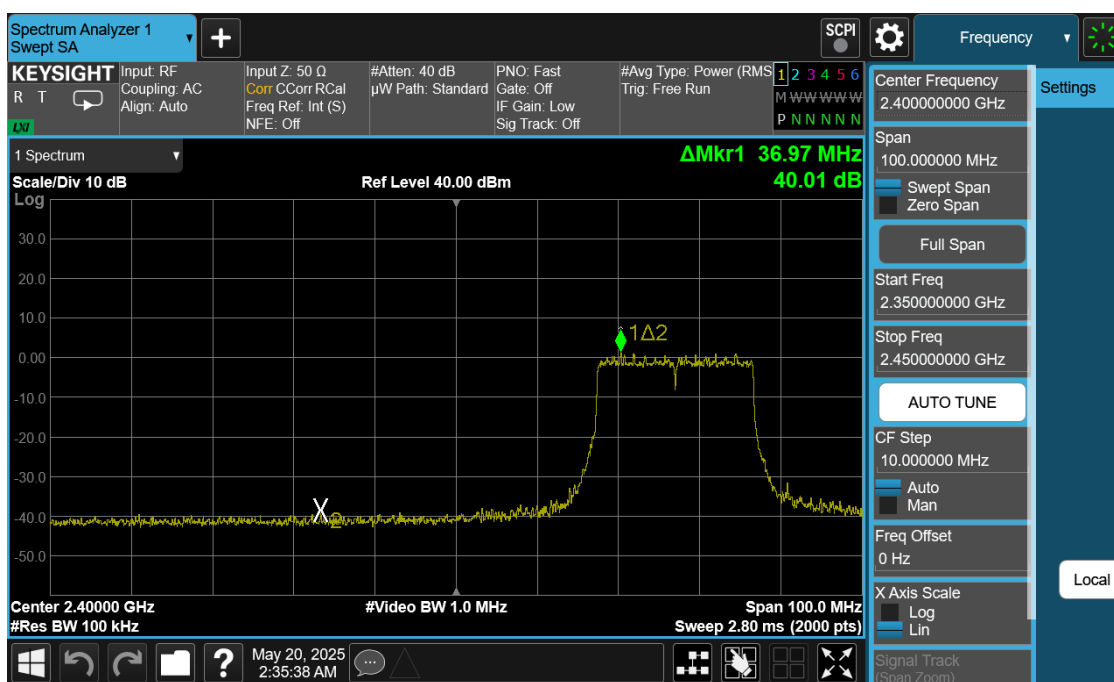


Plot 7-38. Band Edge Antenna 0 (Common) (802.11ax OFDMA – RU242 – Ch. 4)

|                                            |                                                                                     |                                                                                                                                                                                                                  |                                         |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|-----------------------------------|
| FCC ID: BCGA3300<br>IC: 579C-A3300         |  | Test Dates:<br>3/24/2025 - 11/26/2025                                                                                                                                                                            | EUT Type:<br>Smart Speaker with Display | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2503170028-05-R4.BCG |  | This report is Blockchain Verified. To verify the report authenticity, please visit <a href="https://www.blockchain-verified.com">https://www.blockchain-verified.com</a> or by clicking on the Blockchain logo. |                                         | Page 64 of 175                    |

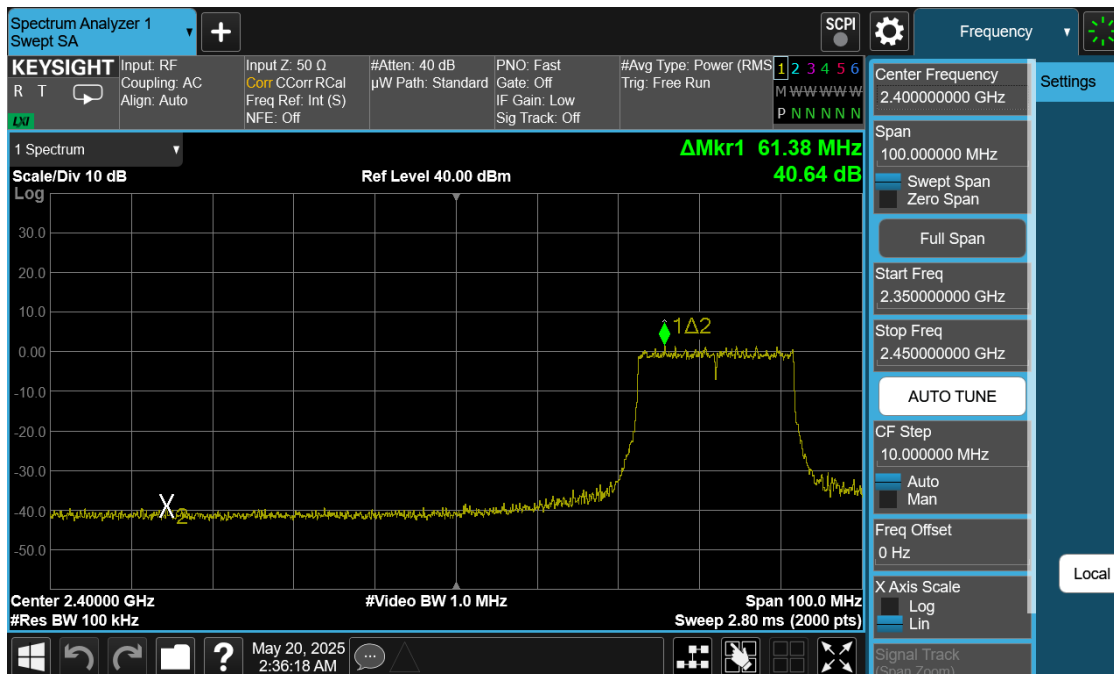


Plot 7-39. Band Edge Antenna 0 (Common) (802.11ax OFDMA – RU242 – Ch. 5)

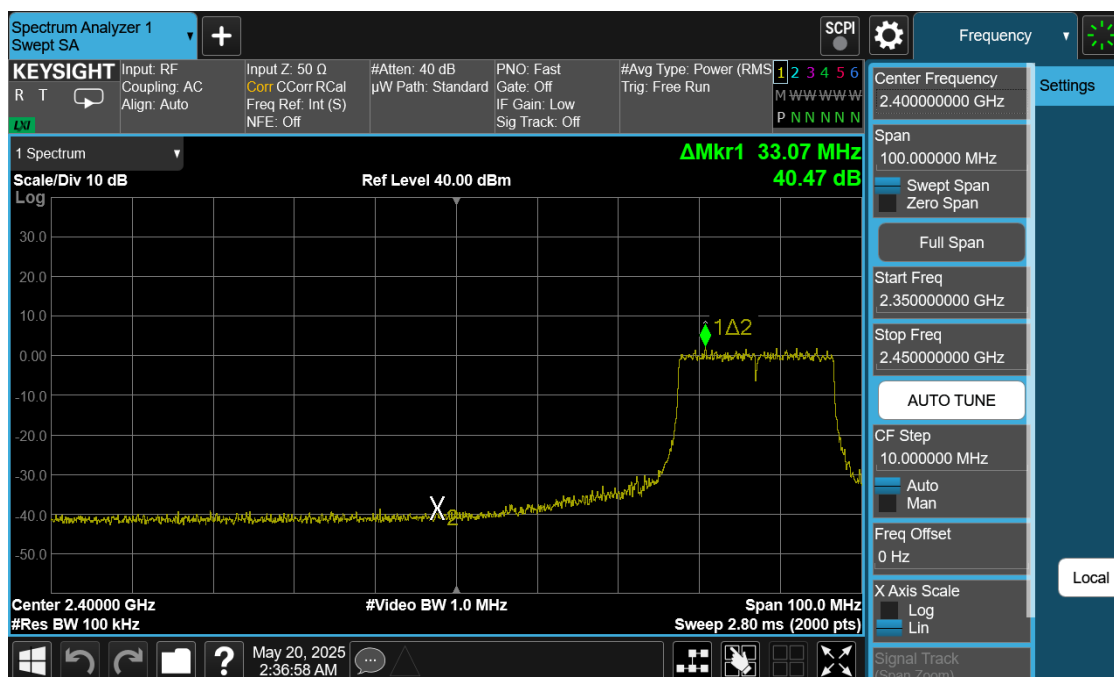


Plot 7-40. Band Edge Antenna 0 (Common) (802.11ax OFDMA – RU242 – Ch. 6(Low Channel))

|                                            |                                                                                     |                                                                                                                                                                                                                  |                                         |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|-----------------------------------|
| FCC ID: BCGA3300<br>IC: 579C-A3300         |  | Test Dates:<br>3/24/2025 - 11/26/2025                                                                                                                                                                            | EUT Type:<br>Smart Speaker with Display | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2503170028-05-R4.BCG |  | This report is Blockchain Verified. To verify the report authenticity, please visit <a href="https://www.blockchain-verified.com">https://www.blockchain-verified.com</a> or by clicking on the Blockchain logo. |                                         | Page 65 of 175                    |

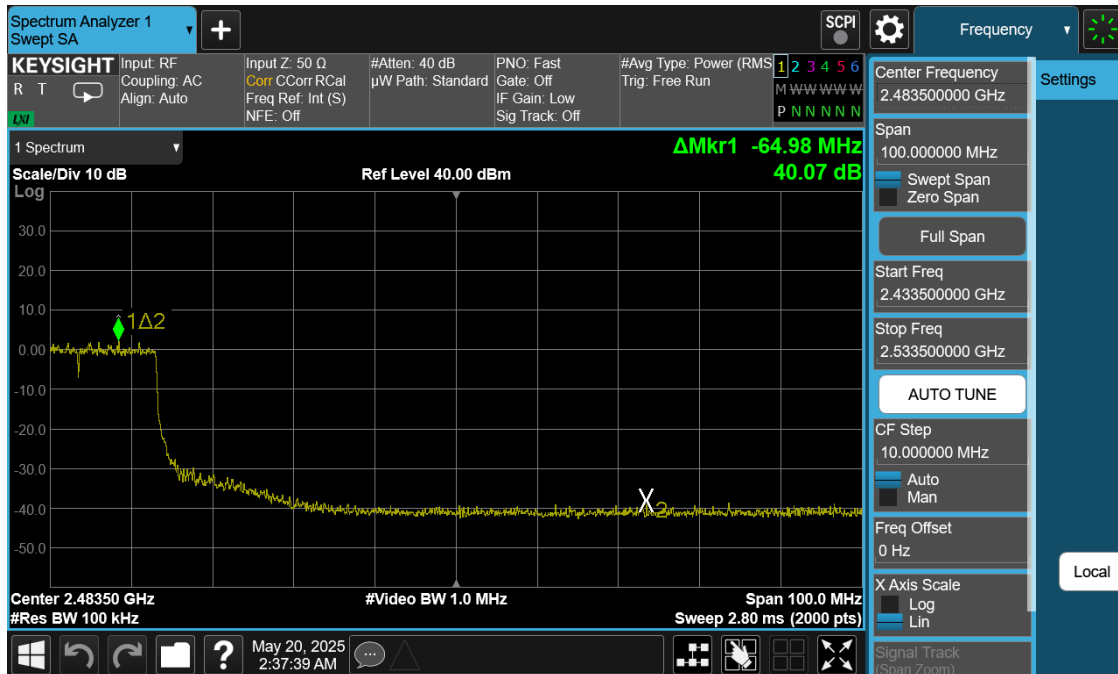


Plot 7-41. Band Edge Antenna 0 (Common) (802.11ax OFDMA – RU242 – Ch. 6(High Channel))

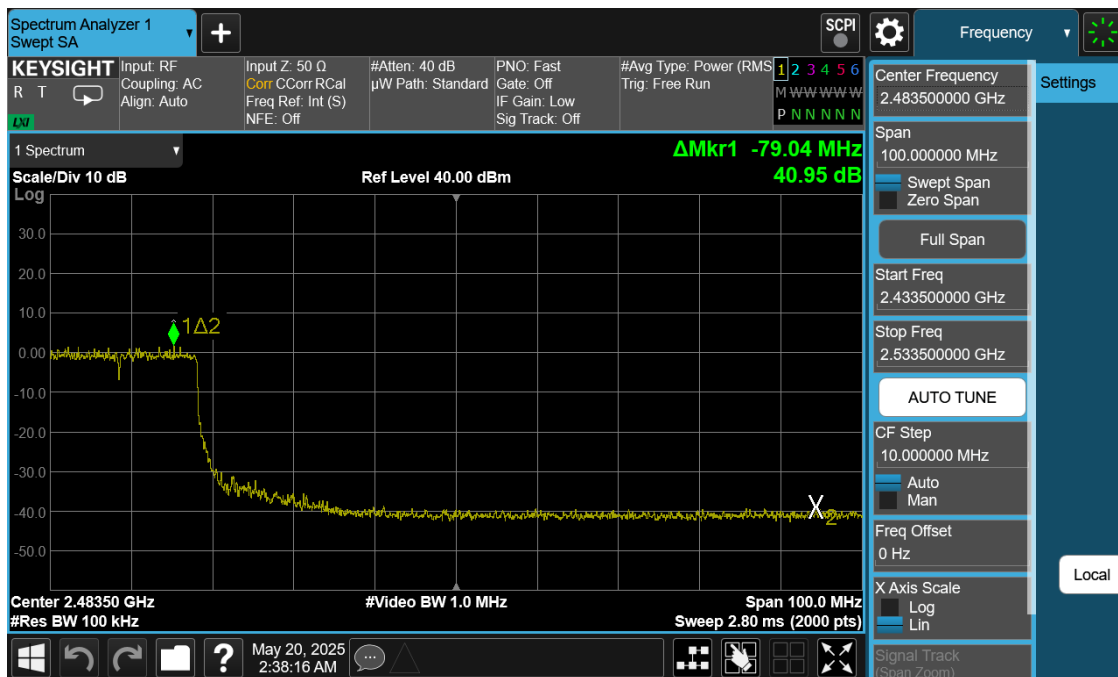


Plot 7-42. Band Edge Antenna 0 (Common) (802.11ax OFDMA – RU242 – Ch. 7)

|                                            |                                                                                     |                                                                                                                                                                                                                  |                                         |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|-----------------------------------|
| FCC ID: BCGA3300<br>IC: 579C-A3300         |  | Test Dates:<br>3/24/2025 - 11/26/2025                                                                                                                                                                            | EUT Type:<br>Smart Speaker with Display | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2503170028-05-R4.BCG |  | This report is Blockchain Verified. To verify the report authenticity, please visit <a href="https://www.blockchain-verified.com">https://www.blockchain-verified.com</a> or by clicking on the Blockchain logo. |                                         | Page 66 of 175                    |

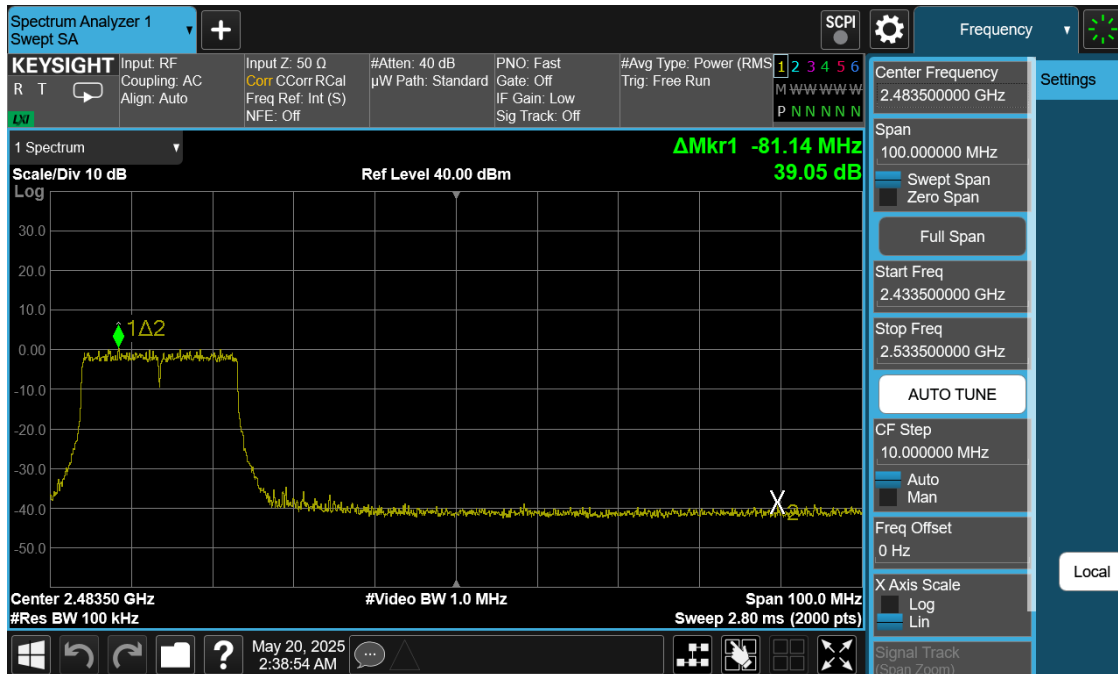


Plot 7-43. Band Edge Antenna 0 (Common) (802.11ax OFDMA – RU242 – Ch. 8)

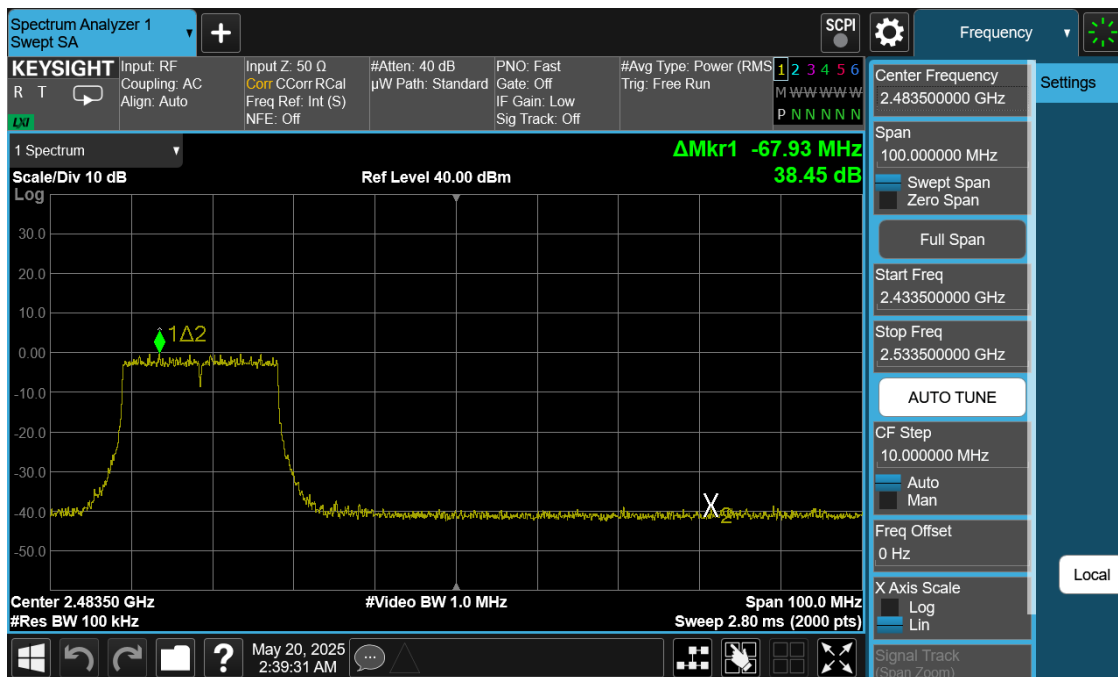


Plot 7-44. Band Edge Antenna 0 (Common) (802.11ax OFDMA – RU242 – Ch. 9)

|                                            |                                                                                     |                                                                                                                                                                                                                  |                                         |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|-----------------------------------|
| FCC ID: BCGA3300<br>IC: 579C-A3300         |  | Test Dates:<br>3/24/2025 - 11/26/2025                                                                                                                                                                            | EUT Type:<br>Smart Speaker with Display | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2503170028-05-R4.BCG |  | This report is Blockchain Verified. To verify the report authenticity, please visit <a href="https://www.blockchain-verified.com">https://www.blockchain-verified.com</a> or by clicking on the Blockchain logo. |                                         | Page 67 of 175                    |

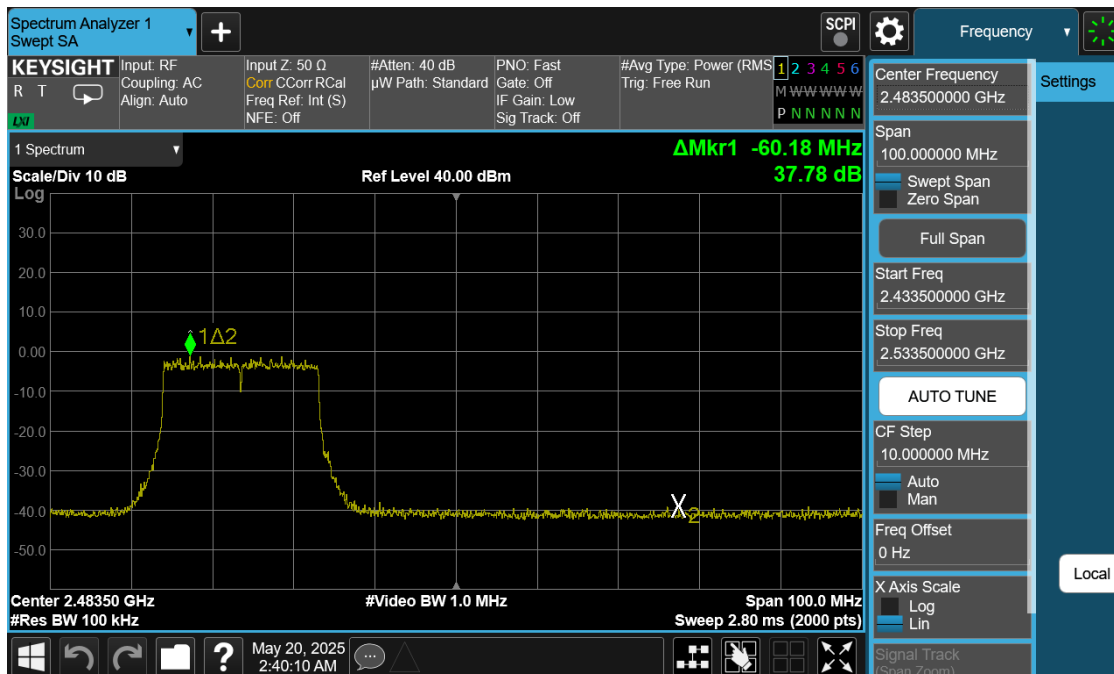

Plot 7-45. Band Edge Antenna 0 (Common) (802.11ax OFDMA – RU242 – Ch. 10)


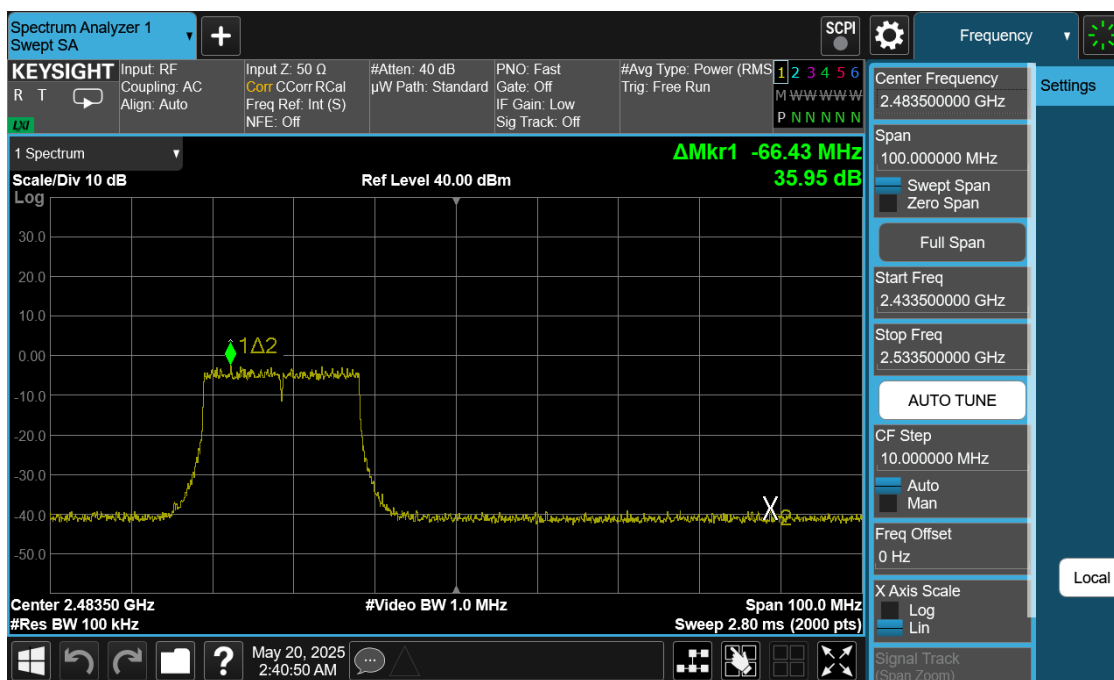


Plot 7-46. Band Edge Antenna 0 (Common) (802.11ax OFDMA – RU242 – Ch. 11)


|                                            |                                                                                     |                                                                                                                                                                                                                  |                                         |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|-----------------------------------|
| FCC ID: BCGA3300<br>IC: 579C-A3300         |  | Test Dates:<br>3/24/2025 - 11/26/2025                                                                                                                                                                            | EUT Type:<br>Smart Speaker with Display | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2503170028-05-R4.BCG |  | This report is Blockchain Verified. To verify the report authenticity, please visit <a href="https://www.blockchain-verified.com">https://www.blockchain-verified.com</a> or by clicking on the Blockchain logo. |                                         | Page 68 of 175                    |




## 7.6.2 Antenna 1 (Common) Conducted Emissions at the Band Edge

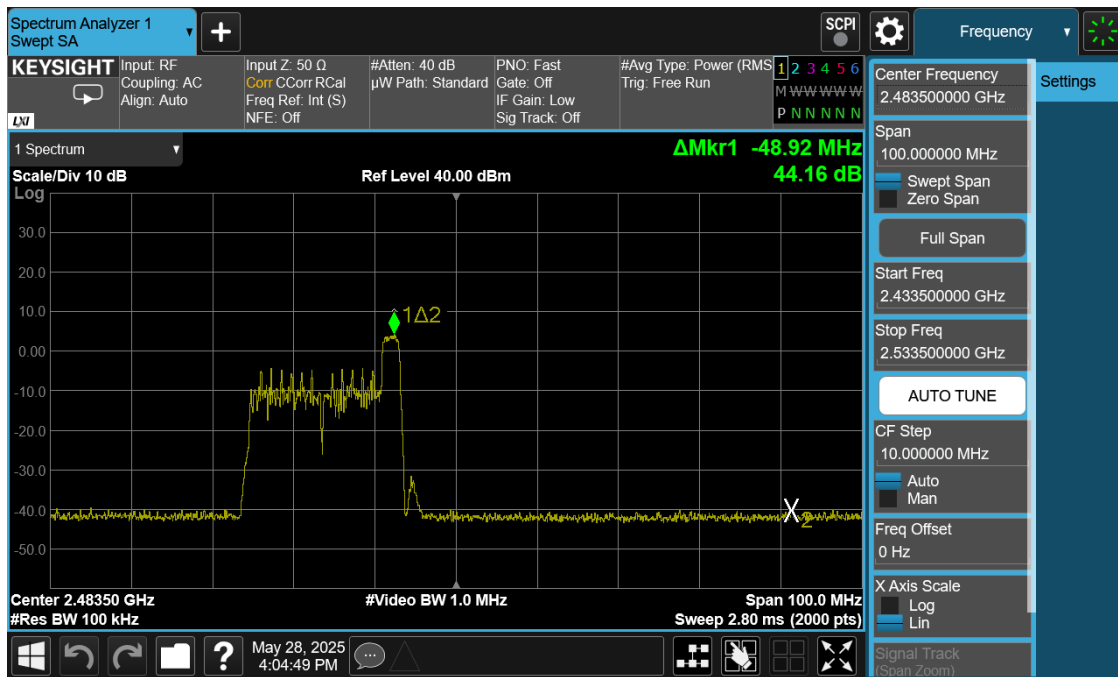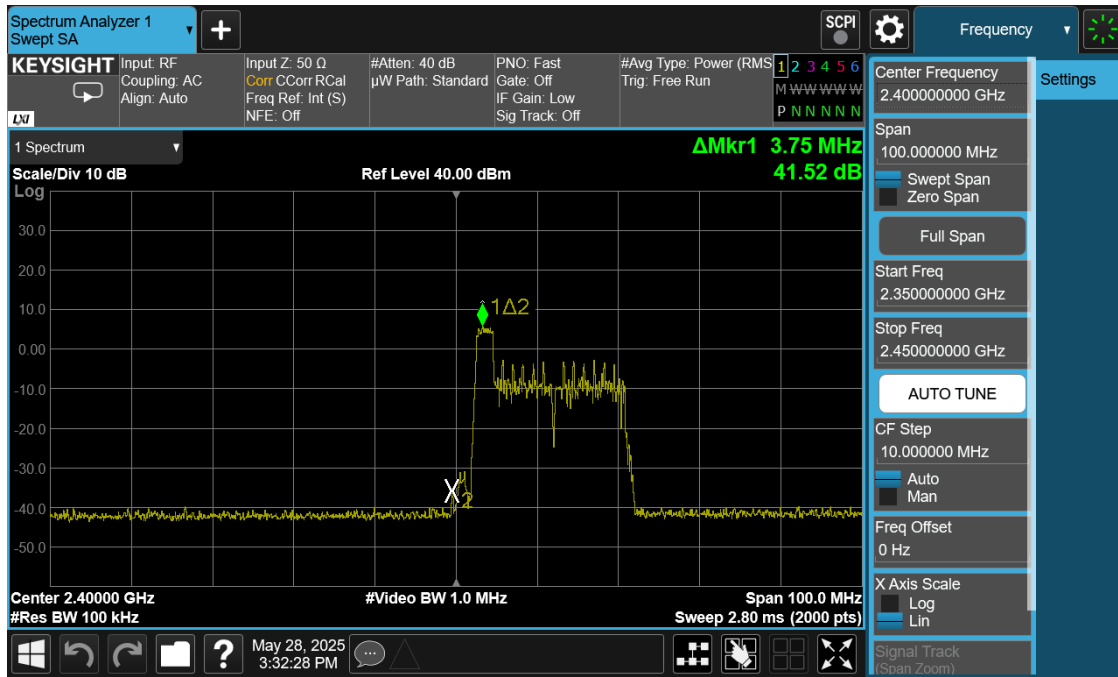

|                                            |                                                                                     |                                                                                                                                                                                                                  |                                         |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|-----------------------------------|
| FCC ID: BCGA3300<br>IC: 579C-A3300         |  | Test Dates:<br>3/24/2025 - 11/26/2025                                                                                                                                                                            | EUT Type:<br>Smart Speaker with Display | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2503170028-05-R4.BCG |  | This report is Blockchain Verified. To verify the report authenticity, please visit <a href="https://www.blockchain-verified.com">https://www.blockchain-verified.com</a> or by clicking on the Blockchain logo. |                                         | Page 70 of 175                    |

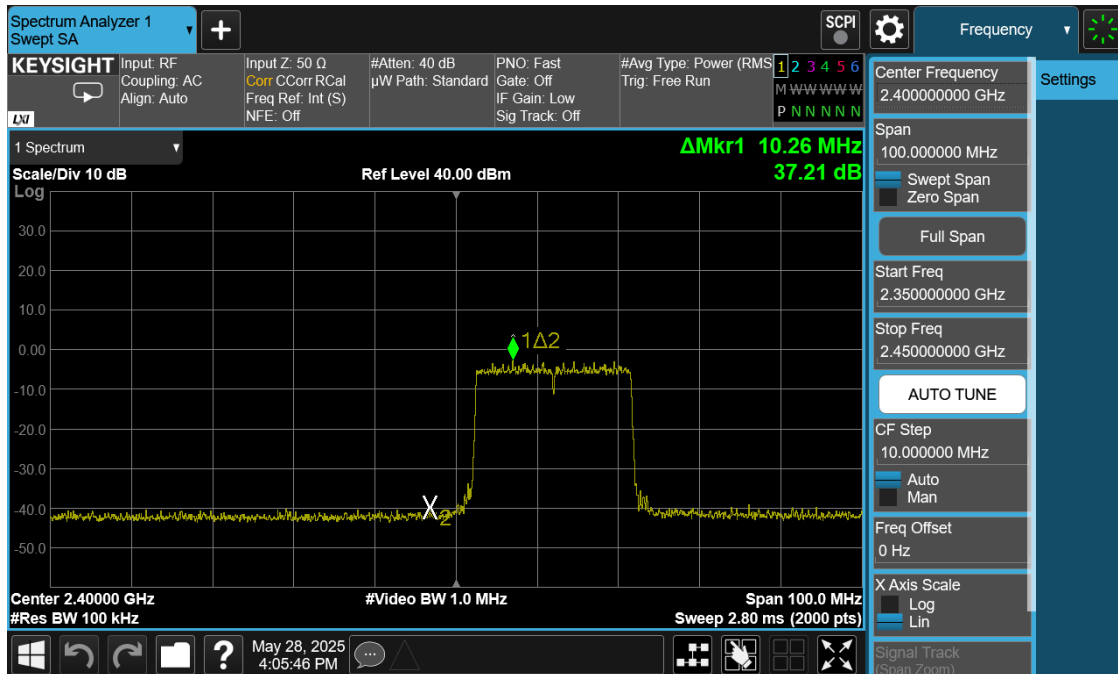

Plot 7-50. Band Edge Antenna 1 (Common) (802.11ax OFDMA – RU242 – Ch. 1)

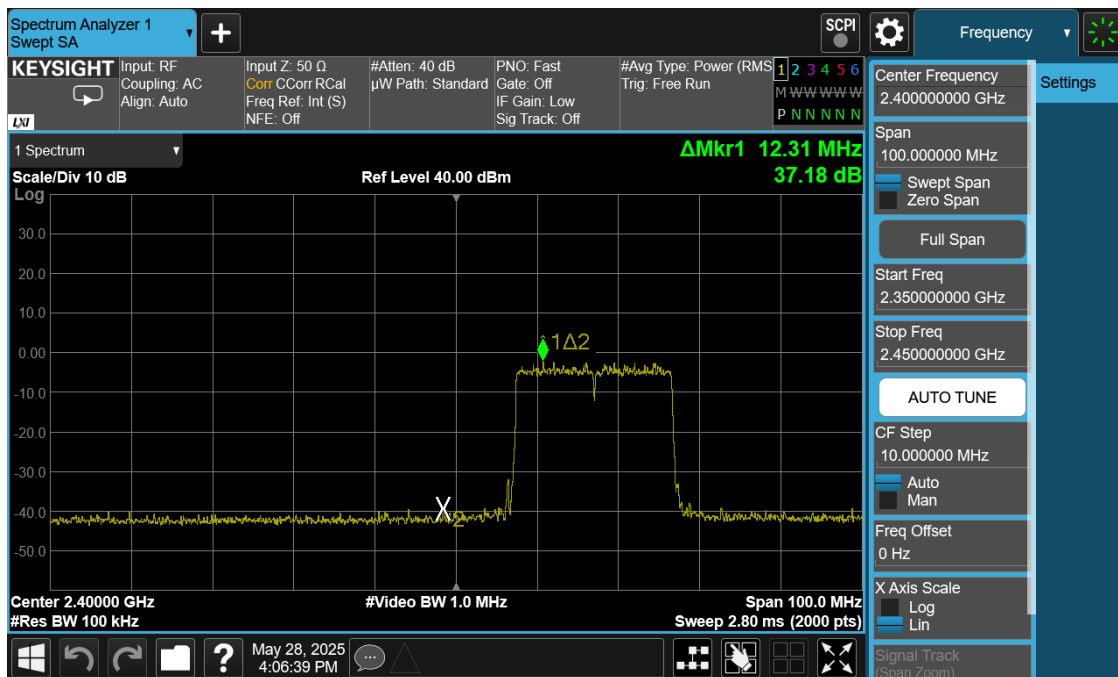

Plot 7-51. Band Edge Antenna 1 (Common) (802.11ax OFDMA – RU242 – Ch. 2)

|                                            |                                                                                     |                                                                                                                                                                                                                  |                                         |                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|-----------------------------------|
| FCC ID: BCGA3300<br>IC: 579C-A3300         |  | Test Dates:<br>3/24/2025 - 11/26/2025                                                                                                                                                                            | EUT Type:<br>Smart Speaker with Display | Approved by:<br>Technical Manager |
| Test Report S/N:<br>1C2503170028-05-R4.BCG |  | This report is Blockchain Verified. To verify the report authenticity, please visit <a href="https://www.blockchain-verified.com">https://www.blockchain-verified.com</a> or by clicking on the Blockchain logo. |                                         | Page 71 of 175                    |